

Improvements to San Tin Interchange Environmental Monitoring and Audit - Noise Monitoring Results


Normal Daytime Hours
(0700 to 1900 hours on any day not being a Sunday or general holiday)

Monitoring Location	Date of Monitoring	Monitoring Period		Weather	Wind Speed, m/s	L _{eq(30min)} dB(A)	L ₁₀ dB(A)	L ₉₀ dB(A)	Major Noise Source(s)
		From	To						
CM1	14-May-08	13:20	13:50	Fine	0	65	67	60	Traffic noise from San Tin Highway.
	27-May-08	13:35	14:05	Fine	0	67	68	64	Traffic noise from San Tin Highway.
CM2	14-May-08	15:30	16:00	Fine	0	73	76	67	Traffic noise from San Tin Highway.
	27-May-08	14:15	14:45	Fine	0	73	76	67	Traffic noise from San Tin Highway.
CM3	14-May-08	16:25	16:55	Fine	0	56	56	51	Traffic noise from San Tin Highway.
	27-May-08	15:05	15:35	Fine	0	60	64	55	Traffic noise from San Tin Highway.

Remarks: (1) CM2 is a non-façade measurement location. A positive correction of 3 dB(A) has been applied to the measured noise level according to EPD's guideline.

Improvements to San Tin Interchange Environmental Monitoring and Audit

Noise Monitoring Results of Monitoring Stations CM1, CM2 & CM3 Normal Daytime Hours (0700 to 1900 Hours)

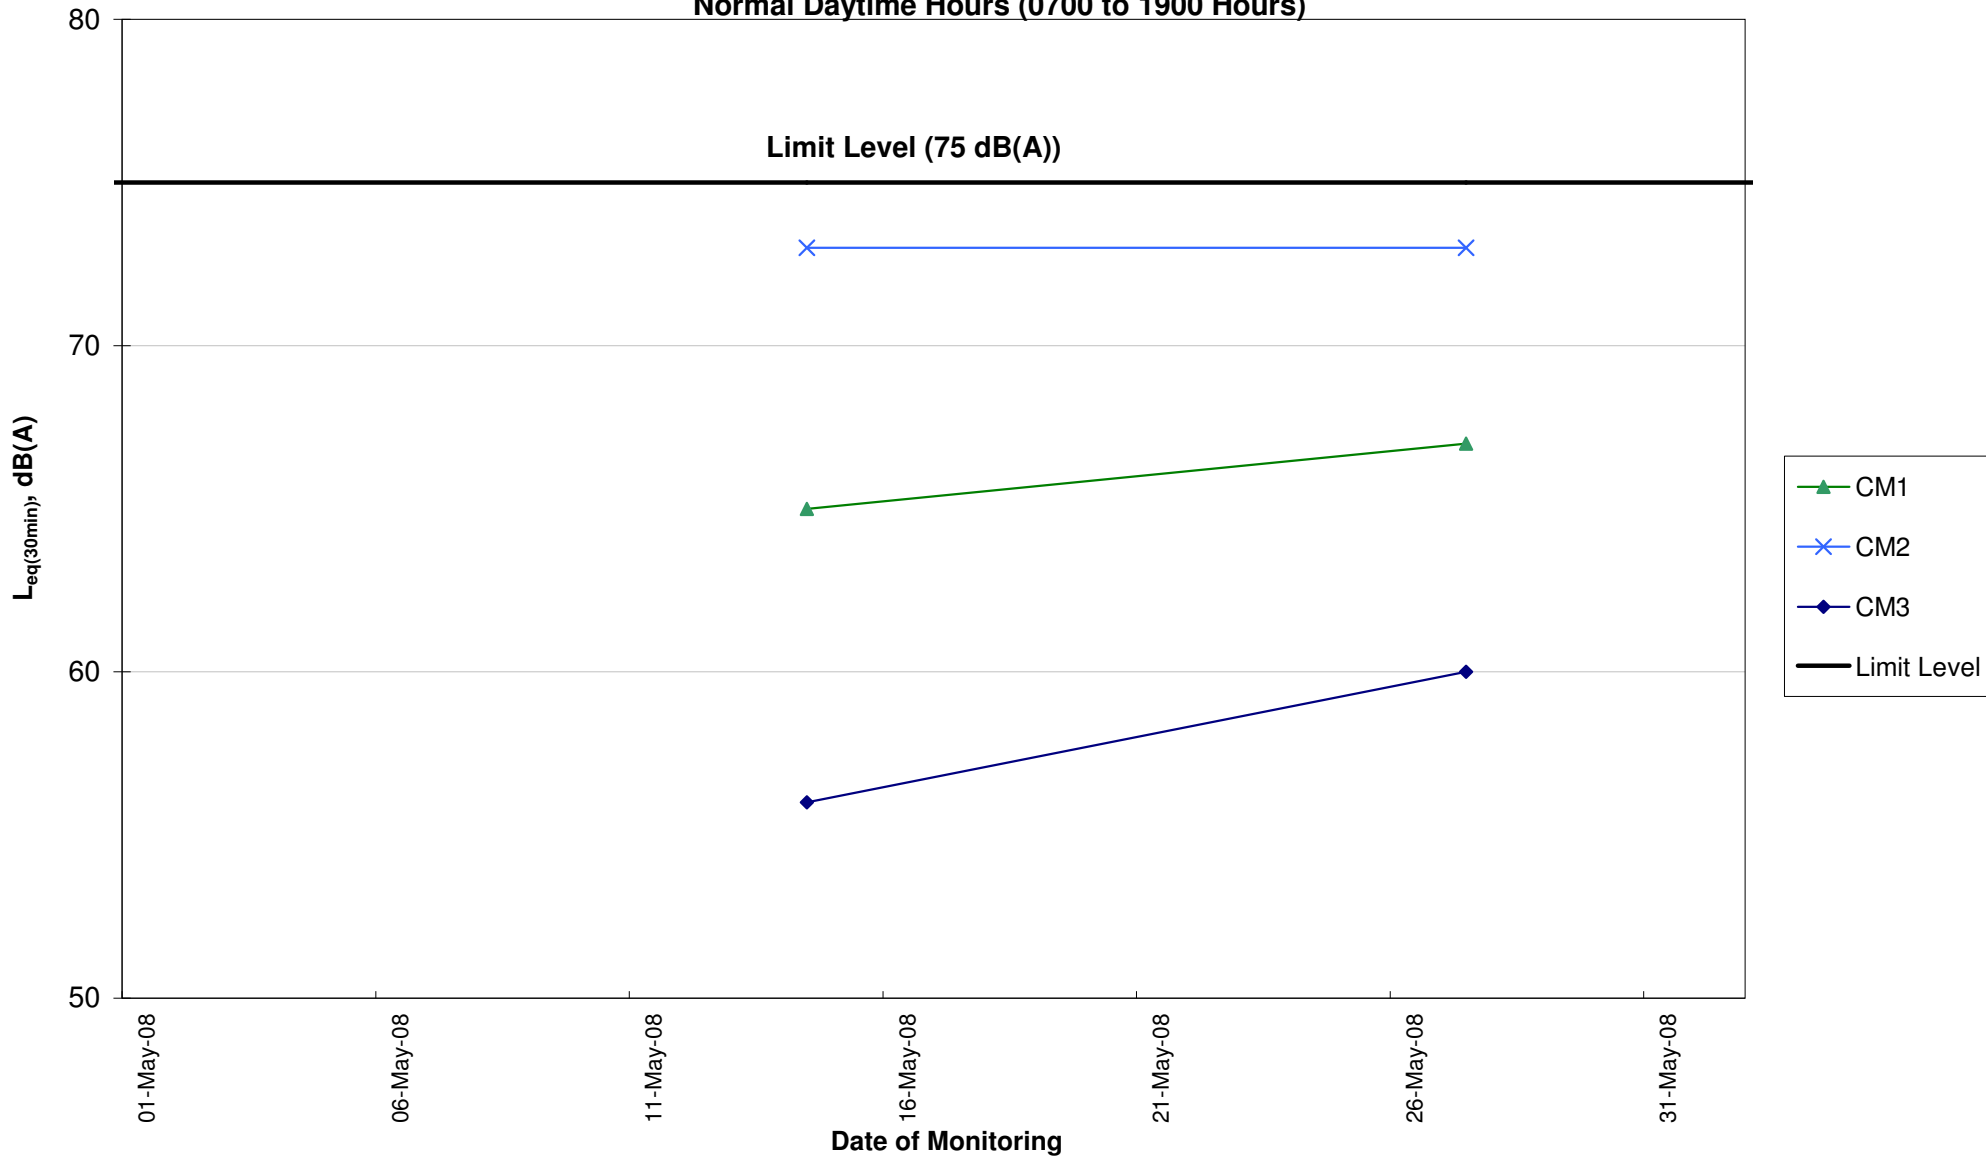

Note: (1) CM2 is a non-façade measurement location. A positive correction of 3dB(A) has been applied to the measured noise level according to EPD's guideline.