

**Proposed 11kV Submarine Cables  
Replacement Connecting Liu Ko Ngam  
and Pak Sha Tau Tsui at Kat O -  
Environmental Monitoring & Audit**

*Seventh Water Quality Impact Monitoring Report*

7 April 2016

*Submitted by*

**Environmental Resources Management**

16/F Berkshire House


25 Westlands Road

Quarry Bay, Hong Kong

Telephone 2271 3000

Facsimile 2723 5660

*www.erm.com*



**ERM**




# Proposed 11kV Submarine Cables Replacement Connecting Liu Ko Ngam and Pak Sha Tau Tsui at Kat O - Environmental Monitoring & Audit

**Environmental Resources Management**

16/F Berkshire House  
25 Westlands Road  
Quarry Bay, Hong Kong  
Telephone: (852) 2271 3000  
Facsimile: (852) 2723 5660  
E-mail: post.hk@erm.com  
http://www.erm.com

*Seventh Water Quality Impact Monitoring Report*

**Document Code: 0259952\_Seventh Impact Monitoring Report.doc**

Client:  CLP Power Hong Kong Limited (CLP)		Project No:  0259952			
Summary:  This document presents the monitoring requirements, methodologies and results of impact water quality measurements in the reporting period from 14 March to 3 April 2016 at the monitoring locations near the proposed 11kV submarine cables replacement connecting Liu Ko Ngam and Pak Sha Tau Tsui at Kat O.		Date: 7 April 2016			
		Approved by:   Terence Fong Partner			
v0	Seventh Water Quality Impact Monitoring Report	YL	FZ	TF	7/4/16
Revision	Description	By	Checked	Approved	Date
<p>This report has been prepared by Environmental Resources Management the trading name of 'ERM Hong-Kong, Limited', with all reasonable skill, care and diligence within the terms of the Contract with the client, incorporating our General Terms and Conditions of Business and taking account of the resources devoted to it by agreement with the client.</p> <p>We disclaim any responsibility to the client and others in respect of any matters outside the scope of the above.</p> <p>This report is confidential to the client and we accept no responsibility of whatsoever nature to third parties to whom this report, or any part thereof, is made known. Any such party relies on the report at their own risk.</p>		<p>Distribution</p> <p><input type="checkbox"/> Internal</p> <p><input checked="" type="checkbox"/> Public</p> <p><input type="checkbox"/> Confidential</p>			
		 			

**Proposed 11kV Submarine Cables Replacement Connecting Liu Ko Ngam  
and Pak Sha Tau Tsui at Kat O - Environmental Monitoring & Audit  
Environmental Certification Sheet**

**EP-461/2013**


**Reference Document/Plan**

Document/ <del>Plan to be Certified/</del> Verified:	Seventh Water Quality Impact Monitoring Report
Date of Report:	7 April 2016
Date prepared by Environmental Team:	7 April 2016
Date received by IC:	7 April 2016

**Reference Project Profile Annex E EM&A Requirement and EP Requirement**

EM&A Requirement:	Project Profile, Annex E EM&A Requirements, Section E1
Content:	<i>Water Quality Monitoring and Reporting</i>
E.1.3	“Impact Monitoring will comprise sampling two times a week during the cable installation works at the same location as the Baseline Monitoring Stations. Samples shall be taken during both mid flood and mid ebb tidal states on each sampling occasion...In case the Impact Monitoring is ceased with reasons such as the operations of the cable installation has no disturbance of seabed or the works are suspended due to safety issue or adverse weather conditions etc. for more than 1 week. The Contractor should send a confirmation letter to EPD and AFCD 1 week before the cessation of Impact Monitoring.”
E.1.5	“Schedule for impact monitoring should be submitted to EPD and AFCD at least 1 week before commencement of the monitoring works for agreement. A letter report shall be provided to EPD and AFCD that shall include the monitoring results and an interpretation of monitoring results. The monitoring data should be provided graphically to show the relationship between the Control, Gradient and Impact Stations and compliance or noncompliance with respect to the Action/Limit Levels.... An Impact Monitoring Report shall be provided within one week of completing every weekly monitoring survey for the first three impact monitoring weeks. If there are no exceedances recorded during the first three weeks, a Bi-weekly Impact Monitoring Report shall be provided within 1 week of completing every two weekly monitoring surveys.”
EP Condition:	Condition No. 2.1
Content:	<i>Water Quality Monitoring</i>
2.1	All measures described in the Project Profile (No. PP-489/2013) submitted by the applicant on 30 May 2013 shall be fully implemented.

**IC Verification**

I hereby verify that the above referenced document/ <del>plan</del> complies with the above referenced condition of EP-461/2013.	
	
Terence Fong, Independent Checker	Date: 7 April 2016

## CONTENTS

	<b>EXECUTIVE SUMMARY</b>	<b>I</b>
<b>1</b>	<b>INTRODUCTION</b>	<b>1</b>
<b>1.1</b>	<b>PURPOSE OF THE REPORT</b>	<b>1</b>
<b>1.2</b>	<b>STRUCTURE OF THE REPORT</b>	<b>1</b>
<b>2</b>	<b>PROJECT INFORMATION</b>	<b>2</b>
<b>2.1</b>	<b>BACKGROUND</b>	<b>2</b>
<b>2.2</b>	<b>MARINE CONSTRUCTION WORKS UNDERTAKEN DURING REPORTING WEEK</b>	<b>3</b>
<b>2.3</b>	<b>STATUS OF ENVIRONMENTAL APPROVAL DOCUMENTS</b>	<b>3</b>
<b>3</b>	<b>IMPACT WATER QUALITY MONITORING REQUIREMENTS</b>	<b>5</b>
<b>3.1</b>	<b>MONITORING LOCATIONS</b>	<b>5</b>
<b>3.2</b>	<b>MONITORING PARAMETERS</b>	<b>6</b>
<b>3.3</b>	<b>MONITORING EQUIPMENT AND METHODOLOGY</b>	<b>6</b>
<b>3.4</b>	<b>ACTION AND LIMIT LEVELS</b>	<b>8</b>
<b>3.5</b>	<b>EVENT AND ACTION PLAN</b>	<b>9</b>
<b>4</b>	<b>IMPACT WATER QUALITY MONITORING RESULTS</b>	<b>10</b>
<b>5</b>	<b>ENVIRONMENTAL NON-CONFORMANCES</b>	<b>11</b>
<b>5.1</b>	<b>SUMMARY OF ENVIRONMENTAL EXCEEDANCE</b>	<b>11</b>
<b>5.2</b>	<b>SUMMARY OF ENVIRONMENTAL NON-COMPLIANCE</b>	<b>11</b>
<b>5.3</b>	<b>SUMMARY OF ENVIRONMENTAL COMPLAINT</b>	<b>11</b>
<b>5.4</b>	<b>SUMMARY OF ENVIRONMENTAL SUMMONS AND PROSECUTION</b>	<b>11</b>
<b>6</b>	<b>FUTURE KEY ISSUES</b>	<b>12</b>
<b>7</b>	<b>CONCLUSIONS</b>	<b>13</b>

## LIST OF TABLES

<i>Table 2.1</i>	<i>Summary of Environmental Licensing, Notification, Permit and Reporting Status</i>
<i>Table 3.1</i>	<i>Water Quality Monitoring Stations</i>
<i>Table 3.2</i>	<i>Equipment Used during Impact Water Quality Monitoring</i>
<i>Table 3.3</i>	<i>Action and Limit Levels of Water Quality</i>
<i>Table 3.4</i>	<i>Event Action Plan for Water Quality</i>

## LIST OF FIGURES

<i>Figure 2.1</i>	<i>Alignment of the Proposed 11kV Submarine Cable Circuit from Liu Ko Ngam to Pak Sha Tau Tsui</i>
<i>Figure 3.1</i>	<i>Water Quality Monitoring Station</i>

## LIST OF ANNEXES

<i>Annex A</i>	<i>Impact Water Quality Monitoring Schedule</i>
<i>Annex B</i>	<i>Calibration Reports of Multi-parameter Sensor</i>
<i>Annex C</i>	<i>QA/QC Results for Suspended Solids Testing</i>
<i>Annex D</i>	<i>Water Quality Monitoring Results</i>

## ***EXECUTIVE SUMMARY***

The submarine cable installation works for the 11kV submarine cable connecting Liu Ko Ngam to Pak Sha Tau Tsui at Kat O commenced in the week starting 21 December 2015. This is the *Seventh Water Quality Impact Monitoring Report*, presenting results and findings of the water quality impact monitoring conducted during the period from 14 March to 3 April 2016, in accordance with the *Environmental Monitoring and Audit Requirement (EM&A Requirement)*.

### **Water Quality Monitoring**

Four (4) monitoring events were scheduled in the reporting period, on 18, 21, 23 and 29 March 2016 respectively. Monitoring events at designated monitoring stations were performed on schedule.

Cable laying completed within the monitoring period. Impact water quality monitoring will continue when backfilling works start.

### **Environmental Non-conformance**

No exceedances of Action and Limit Levels were recorded during the reporting period.

No complaint and summons/prosecution was received during the reporting period.

# 1 INTRODUCTION

ERM-Hong Kong, Limited (ERM) was appointed by CLP Power Hong Kong Limited (CLP) as the Environmental Team (ET) to implement the Environmental Monitoring and Audit (EM&A) programme for the installation of an 11kV submarine cable connecting Liu Ko Ngam to Pak Sha Tau Tsui at Kat O (the Project).

## 1.1 PURPOSE OF THE REPORT

This is the *Seventh Water Quality Impact Monitoring Report* which summarises the results of impact water quality monitoring as part of the EM&A programme during the reporting period from 14 March to 3 April 2016.

## 1.2 STRUCTURE OF THE REPORT

The structure of the Report is as follows:

*Section 1 : Introduction*

Provides the Project background, purpose and report structure.

*Section 2 : Project Information*

Summarises background and scope of the project, the construction works undertaken and the status of Environmental Permits/Licenses during the reporting period.

*Section 3 : Impact Water Quality Monitoring Requirements*

Summarises the monitoring parameters, monitoring programmes, monitoring methodologies, monitoring frequency, monitoring locations, Action and Limit Levels, and Event Action Plan.

*Section 4 : Impact Water Quality Monitoring Results*

Summarises the water quality monitoring results obtained in the reporting period.

*Section 5 : Environmental Non-conformance*

Summarises any monitoring exceedance, environmental complaints and environmental summons within the reporting period.

*Section 6 : Future Key Issues*

Summarises the monitoring schedule for the next reporting period.

*Section 7 : Conclusions*

Presents the key findings of the impact monitoring results.

## 2.1

## BACKGROUND

CLP Power Hong Kong Limited (CLP) proposes to enhance the security of power supply to Kat O Island. At present, there is only one set of 11kV submarine cable connecting Liu Ko Ngam to Pak Sha Tau Tsui at Kat O for power supply. The existing 11kV submarine cable is however more than 30 years old and deteriorating, thus potentially limiting the continuous supply of electricity in the future. CLP therefore proposes to replace the existing 11kV submarine cable connecting Liu Ko Ngam to Pak Sha Tau Tsui at Kat O to ensure the continuous power supply for Kat O. The Project involves the installation of an 11kV cable circuit consisting of two individual cables, with an intended burial depth up to 5 m for the submarine cable section and about 1 m for the land section. The two submarine cables (except the shore end sections which will be at only about 1 m separation and joining into a single cable trench at each landing site) will be 30 m away from each other and running parallel along the alignment. In areas (especially near the landing site) where the cable burial depth does not meet the requirements due to seabed geotechnical constraints, a protective cover such as a concrete slab will be adopted. The total length of the proposed cable alignment is approximately 880 m. A map showing the proposed submarine cable route is presented in *Figure 2.1*.


A *Project Profile* (Register No. PP-489/2013, *Replacement of the Existing 11kV Submarine Cable Circuit Connecting Liu Ko Ngam and Pak Sha Tau Tsui at Kat O*) which includes an assessment of the potential environmental impacts associated with the installation of the submarine cables was prepared and submitted to the Environmental Protection Department (EPD) according to *Section 5(11) of the Environmental Impact Assessment Ordinance (EIAO)* for the application for Permission to apply directly for *Environmental Permit (EP)*. On 11 July 2013 EPD approved the *Project Profile (PP)* and a direct application for *EP* was submitted on 23 July 2013 (Application No. AEP-461/2013). On 27 August 2013 EPD granted an environmental permit for the Project (EP - 461/2013) pursuant to *Section 10 of EIAO*.

Pursuant to *Condition 2.1 of the EP, Water Quality Sampling*, as set out in the approved *PP Annex E Environmental Monitoring & Audit (EM&A) Requirements* (henceforth "*EM&A Requirement*"), is required for this Project. Water Quality Sampling shall be conducted prior to and throughout the cable installation works, and after its completion as set out in the *EM&A Requirement*.

Baseline water quality monitoring was conducted prior to the installation works and results were summarised in the *Baseline Water Quality Monitoring Report* of November 2015.

Impact monitoring started on 22 December 2015, when the cable installation works commenced. Impact monitoring is being conducted twice a week



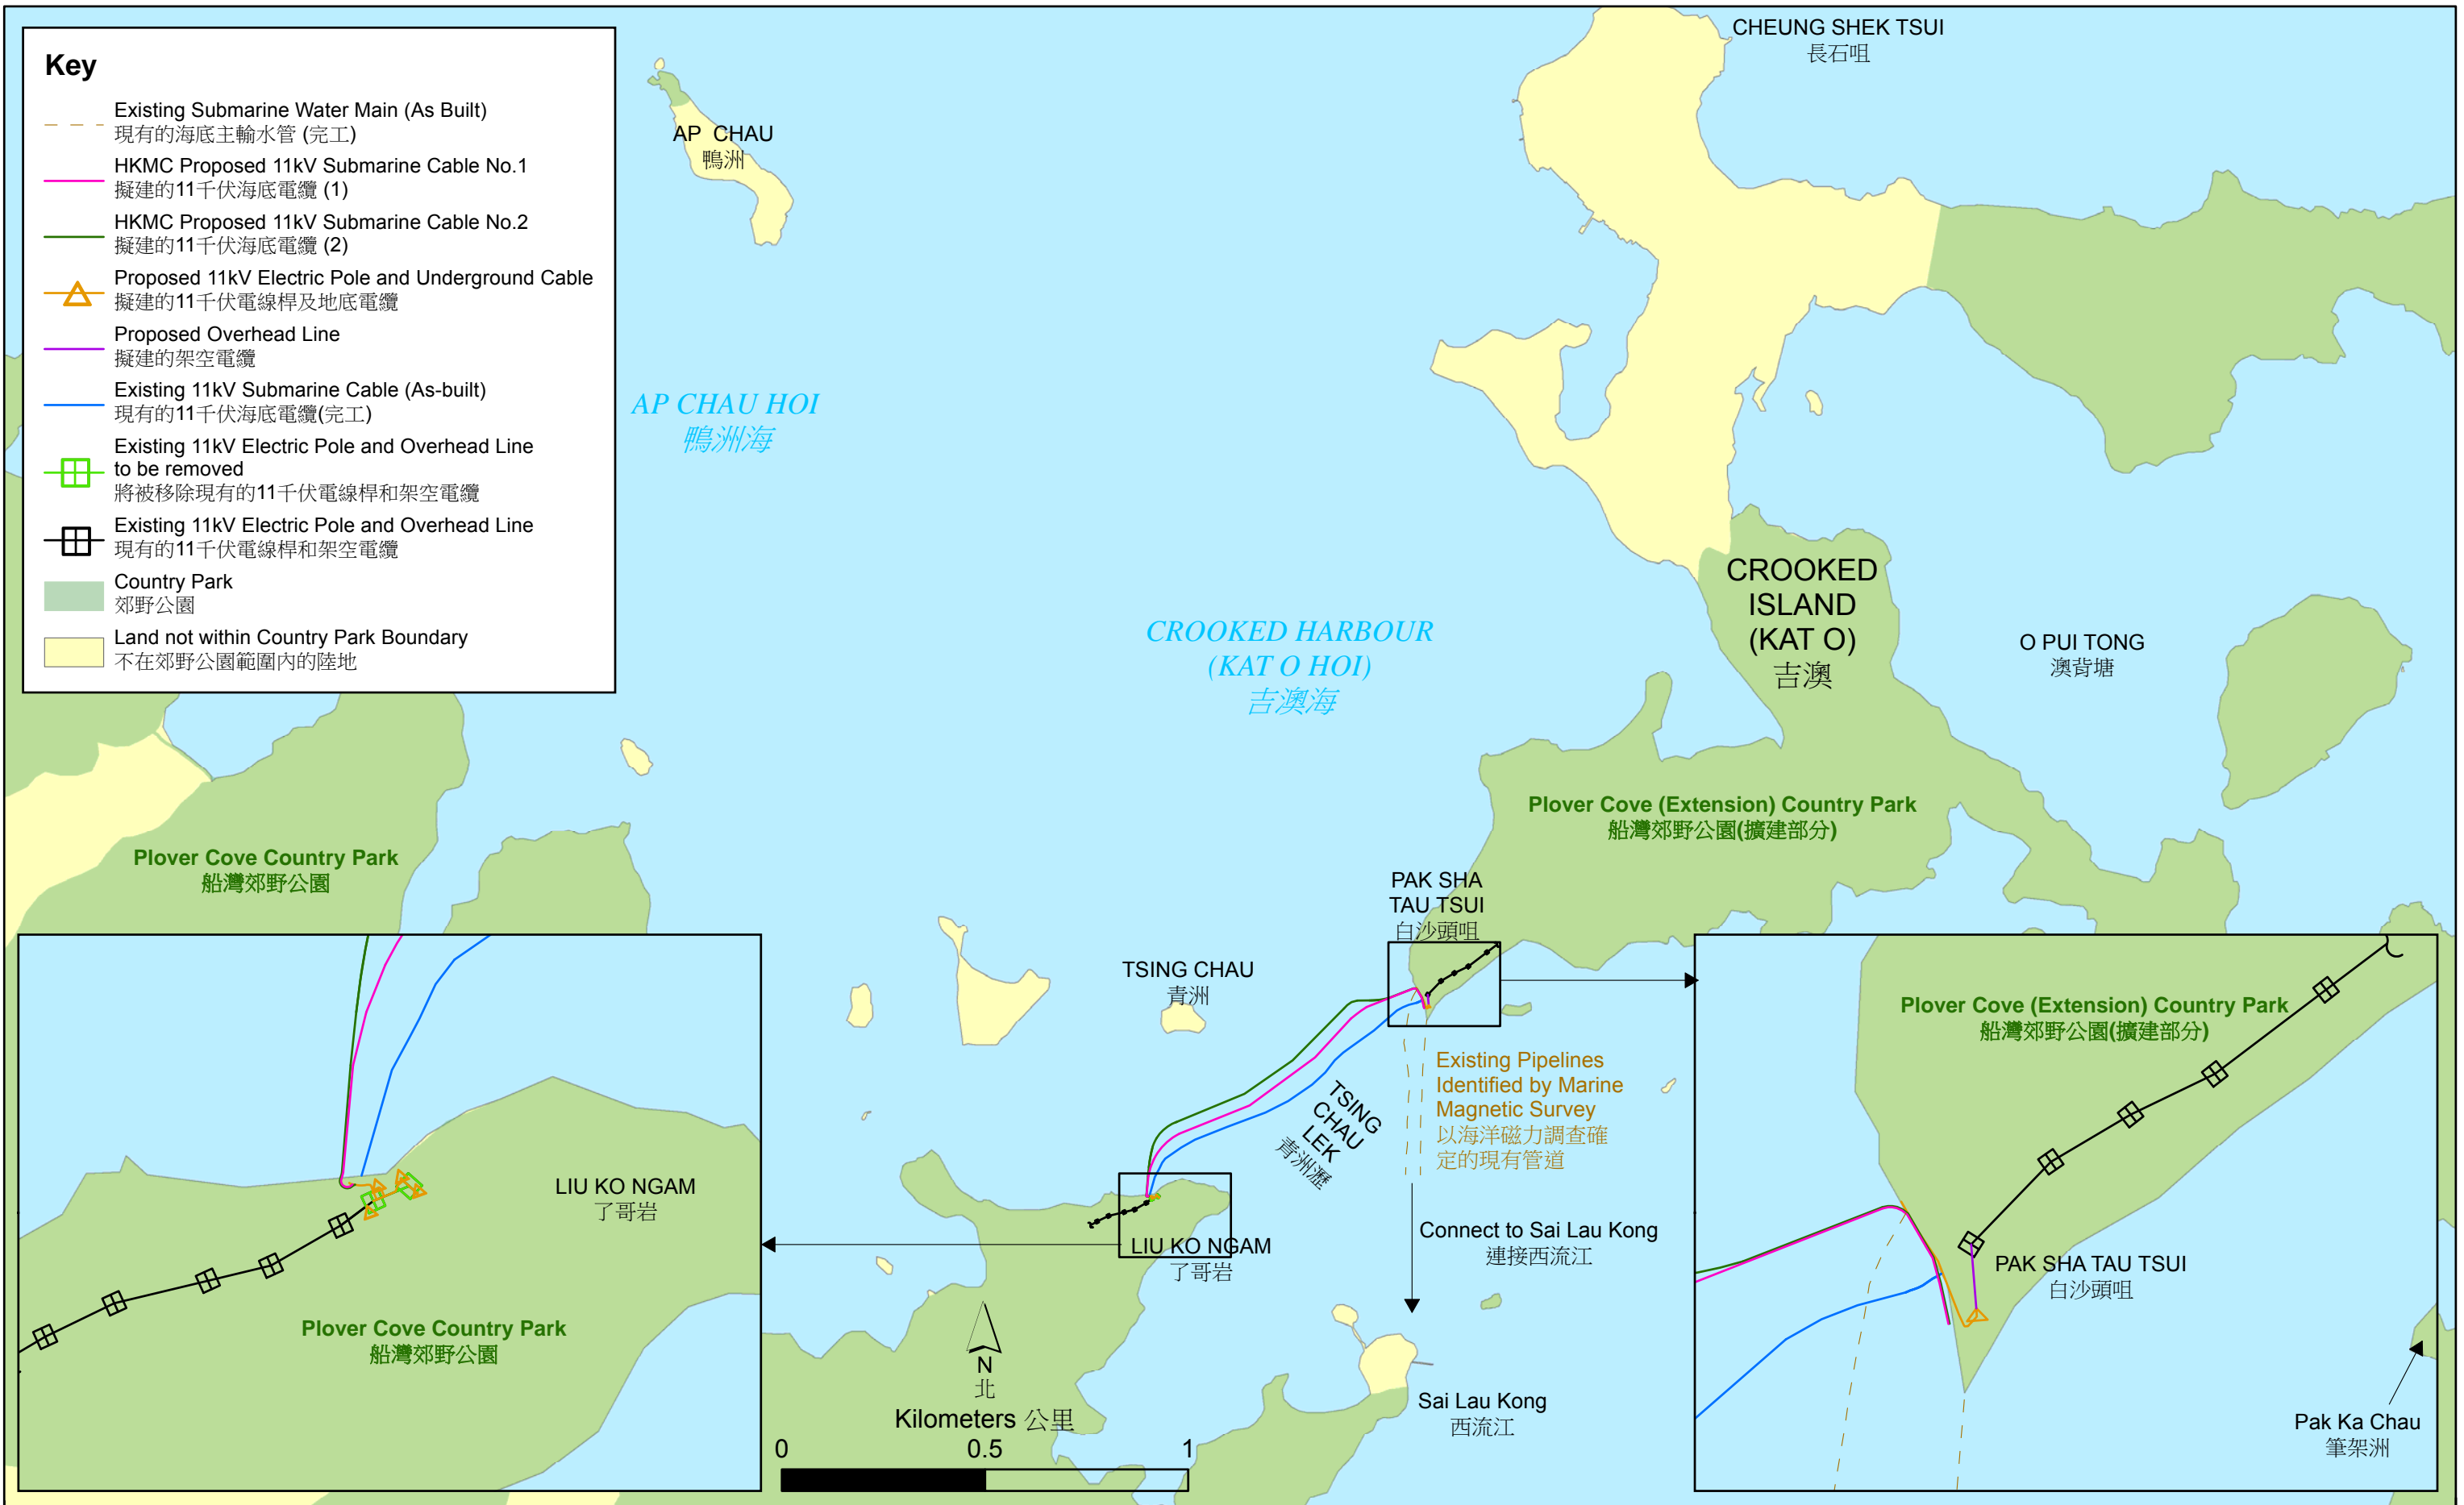

during cable installation works and is suspended when no works are carried out. The water quality impact monitoring is used to reflect the water quality conditions and to identify potential water quality impacts during the cable installation works. With reference to the *EM&A Requirement* reporting will be weekly but if there are no exceedances of Action and Limit Levels during the first three weeks of impact water quality monitoring, a bi-weekly impact monitoring report will be provided within 1 week of completing every two weekly monitoring surveys.

This *Seventh Water Quality Impact Monitoring Report* (the "Report") presents the results and findings for water quality impact monitoring conducted between 14 March and 3 April 2016, at the same locations as the baseline monitoring stations.

## 2.2 *MARINE CONSTRUCTION WORKS UNDERTAKEN DURING REPORTING WEEK*

During the reporting period from 14 March to 3 April 2016, cable laying works were completed and some articulated pipes installed. Backfilling has not started.

## 2.3 *STATUS OF ENVIRONMENTAL APPROVAL DOCUMENTS*

A summary of the relevant permits, licences and reports on marine water quality for this Project is presented in *Table 2.1*.

**Table 2.1** *Summary of Environmental Licensing, Notification, Permit and Reporting Status*

<b>Permit / Licence / Notification / Report</b>	<b>Reference</b>	<b>Validity Period</b>	<b>Remarks</b>
Project Profile	PP-489/2013	Throughout the construction and operation stages	Submitted on 30 May 2013
Environmental Permit	EP-461/2013	Throughout the construction and operation stages	Granted on 27 August 2013
Baseline Water Quality Monitoring Report	-	Throughout the construction period	Submitted on 20 November 2015
First Weekly Impact Water Quality Monitoring Report	-	Construction period of week from 21 to 27 December 2015	Submitted on 4 January 2016
Second Weekly Impact Water Quality Monitoring Report	-	Construction period of week from 28 December 2015 to 3 January 2016	Submitted on 11 January 2016
Third Weekly Impact Water Quality Monitoring Report	-	Construction period from 4 to 10 January 2016	Submitted on 18 January 2016
Bi-weekly Impact Monitoring Report (4 <sup>th</sup> Report)	-	Construction period from 11 to 24 January 2016	Submitted on 1 February 2016

<b>Permit / Licence / Notification / Report</b>	<b>Reference</b>	<b>Validity Period</b>	<b>Remarks</b>
Fifth Water Quality Impact Monitoring Report	-	Construction period from 1 to 7 and 15 to 21 February 2016	Submitted on 26 February 2016
Sixth Water Quality Impact Monitoring Report	-	Construction period from 22 February to 13 March 2016	Submitted on 18 March 2016

### 3.1 MONITORING LOCATIONS

In accordance with the *EM&A Requirement*, water quality monitoring samples were collected at the ten (10) stations situated around the cable installation works, following commencement of Project marine installation works. The locations of the sampling stations are shown in *Figure 3.1*.

- C1 is a Control Station to the north of the cable alignment (approximately 1.4 km away) with the same coordinates as EPD routine monitoring station MM2, which is not supposed to be influenced by the construction works due to its remoteness to the Project works area;
- C2 is a Control Station to the south of the cable alignment (over a distance of 1.6 km) with the same coordinates as EPD routine monitoring station MM7, which is not supposed to be influenced by the construction works due to its remoteness to the Project site;
- SR1 is Impact Station used to monitor the effect of the cable installation works on coral communities of high ecological concern at Tsing Chau;
- SR2 is Impact Station used to monitor the effect of the cable installation works on coral communities of high ecological concern at Ngau Shi Wu Wan;
- SR3 is Impact Station used to monitor the effect of the cable installation works on Lai Chi Wo/ Yan Chau Tong Marine Park (to the west of the Project site);
- SR4 is Impact Station used to monitor the effect of the cable installation works on Yan Chau Tong Marine Park (to the south of the Project site);
- SR5 is Impact Station used to monitor the effect of the cable installation works on Sai Lau Kong FCZ;
- G1 is regarded as a Gradient Station in between Impact Station SR1 and the construction work alignment;
- G2 is Gradient Station located between Impact Stations SR2, SR4 and SR5 and construction work alignment; and
- G3 is Gradient Station located between Impact Stations SR3 and the construction work alignment and landing point at Kiu Ko Ngam.

The co-ordinates of the above monitoring stations are listed in *Table 3.1*.

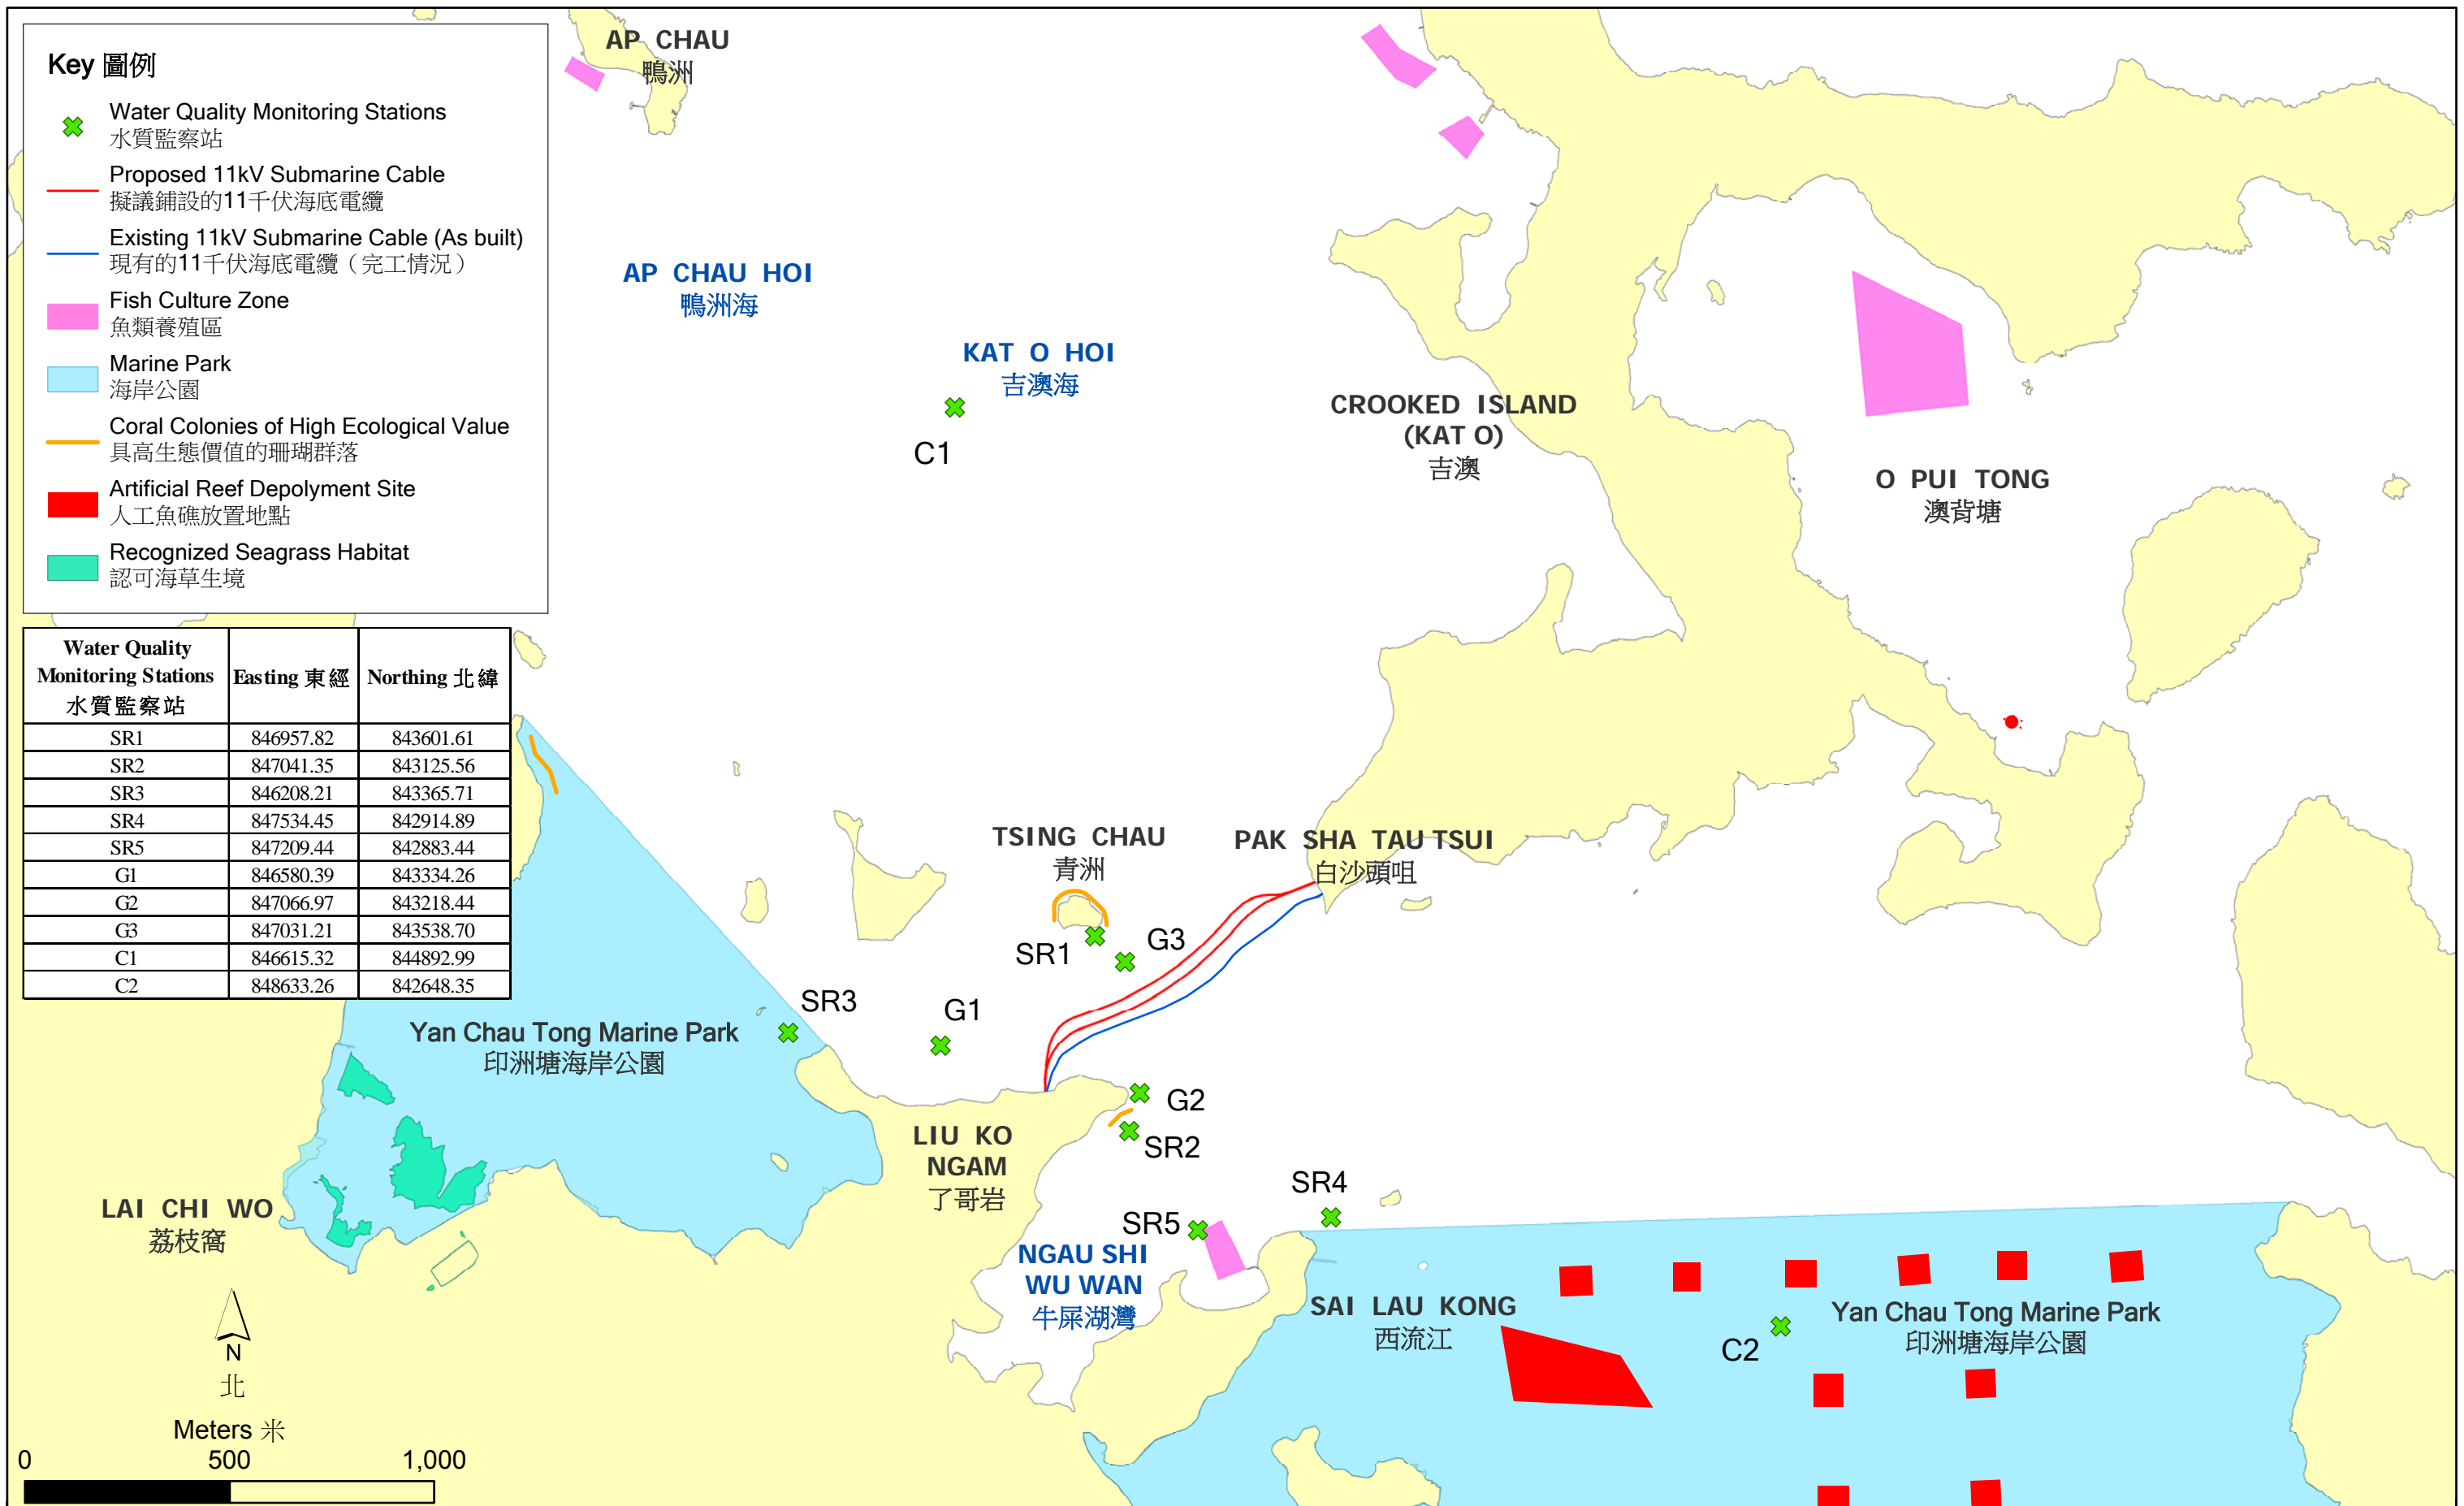


Figure 3.1  
圖 3.1

Water Quality Monitoring Stations

水質監察站

File: T:\GIS\CONTRACT\0259952\Mxd\0259952\_WQMS.mxd  
Date: 30/12/2015

**Table 3.1 Water Quality Monitoring Stations**

<b>Station</b>	<b>Nature</b>	<b>Easting</b>	<b>Northing</b>
C1	Control Station	846615.32	844892.99
C2	Control Station	848633.26	842648.35
SR1	Impact Station	846957.82	843601.61
SR2	Impact Station	847041.35	843125.56
SR3	Impact Station	846208.21	843365.71
SR4	Impact Station	847534.45	842914.89
SR5	Impact Station	847209.44	842883.44
G1	Gradient Station	846580.39	843334.26
G2	Gradient Station	847025.97	843218.44
G3	Gradient Station	847031.21	843538.70

### 3.2 MONITORING PARAMETERS

The water quality impact monitoring was conducted in accordance with the requirements stated in the *EM&A Requirement*. Monitoring parameters are presented below.

The parameters measured *in situ* were:

- Dissolved Oxygen (DO) (% saturation and mg/L)
- Water temperature (°C)
- Turbidity (Nephelometric Turbidity Units [NTU])
- Salinity (parts per thousand [ppt])

The only parameter to be measured in the laboratory was:

- Suspended solids (SS) (mg/L)

In addition to the water quality parameters, other relevant data were also measured and recorded in field logs, including the location of the sampling stations, water depth, sampling depth, current velocity and direction, time, weather conditions, sea conditions (where appropriate), tidal state (where appropriate), special phenomena and work activities undertaken around the monitoring and Project works area that may have influenced the monitoring results.

These parameters will be monitored at all designated marine water quality monitoring stations throughout the whole impact monitoring phase.

### 3.3 MONITORING EQUIPMENT AND METHODOLOGY

#### 3.3.1 Monitoring Equipment

Table 3.2 summaries the equipment used for the impact water quality monitoring.

**Table 3.2** *Equipment Used during Impact Water Quality Monitoring*

<b>Equipment</b>	<b>Model</b>
Global Positioning Device	GARMIN eTrex 10
Water Depth Gauge	Speedtech Instruments SM-5
Water Sampling Equipment	Wildlife Kemmerer 1520
Salinity, DO, Temperature Measuring Meter	YSI PRO 2030
Current Velocity and Direction	Global Water FP111
Turbidity Meter	HACH 2100Q

### 3.3.2 *Monitoring Frequency and Timing*

The water quality monitoring was carried out on two occasions (days) and the intervals between the two sets of monitoring were not less than 36 hours. The water quality sampling was undertaken within a 3 hour window of 1.5 hours before and 1.5 hours after mid flood and mid-ebb tides. The tidal range selected for the baseline monitoring was at least 0.5 m for both flood and ebb tides as far as practicable.

Reference was made to the predicted tides at Ko Lau Wan, which is the tidal station nearest to the Project Site, published on the website of the Hong Kong Observatory <sup>(1)</sup>. Based on the predicted tidal levels at Ko Lau Wan, the water quality impact monitoring was conducted on 18, 21, 23 and 29 March 2016, following the schedule presented in *Annex A*.

### 3.3.3 *Sampling/Testing Protocol*

All *in situ* monitoring instruments were checked, calibrated and certified by a laboratory accredited under HOKLAS or any other international accreditation scheme before use (see calibration reports in *Annex B*), and subsequently will be re-calibrated at-monthly intervals throughout all stages of the water quality monitoring. Responses of sensors and electrodes were checked with certified standard solutions before each use.

For the on-site calibration of field equipment, the *BS 1427: 1993, Guide to Field and On-Site Test Methods for the Analysis of Waters* was observed. Sufficient stocks of spare parts were maintained for replacements when necessary. Backup monitoring equipment was made available.

Water samples for SS measurements were collected in high density polythene bottles, packed in ice (cooled to 4° C without being frozen), and delivered to a HOKLAS laboratory as soon as possible after collection.

At each measurement / sampling depth, two (2) consecutive *in-situ* measurements (DO concentration and saturation, temperature, turbidity, and salinity) and two water samples for SS were taken for lab analysis.

<sup>(1)</sup> Hong Kong Observatory (2016) <http://www.hko.gov.hk/tide/eQUBtide.htm> [Accessed in February and March 2016]

### 3.3.4 *Laboratory Analysis*

All laboratory work was carried out in a HOKLAS accredited laboratory. Water samples of about 1,000 mL were collected at the monitoring and control stations for carrying out the laboratory determinations. The determination work started within the next working day after collection of the water samples. The SS laboratory measurements were provided within two (2) days of the sampling event (i.e. within 48 hours). The analyses followed the standard methods as described in APHA Standard Methods for the *Examination of Water and Wastewater*, 19th Edition, unless otherwise specified (APHA 2540D for SS).

The QA/QC details were in accordance with requirements of HOKLAS or another internationally accredited scheme (*Annex C*).

### 3.3.5 *Sampling Depths & Replication*

Each station was sampled and measurements/ water samples were taken at three depths, namely, 1 m below water surface, mid-depth and 1 m above sea bed, except where the water depth less than 6 m, the mid-depth station may be omitted. For stations that are less than 3 m in depth, only the mid-depth sample was taken.

For *in situ* measurements, duplicate readings were made at each water depth at each station. Duplicate water samples were collected at each water depth at each station.

## 3.4 *ACTION AND LIMIT LEVELS*

The Action and Limit levels which were established based on the results of *Baseline Water Quality Monitoring*, are presented in *Table 3.3*.

**Table 3.3** *Action and Limit Levels of Water Quality*

<b>Parameter</b>	<b>Action Level</b>	<b>Limit Level</b>
DO in mg/L <sup>a</sup>	<p><u>Surface and Middle</u></p> <p>5%-ile of baseline data for surface and middle layer (4.85 mg/L), and 20% exceedance of value at any impact station compared with corresponding data from control stations</p> <p><u>Bottom</u></p> <p>5%-ile of baseline data for bottom layers (4.72 mg/L), and 20% exceedance of value at any impact station compared with corresponding data from control stations</p>	<p><u>Surface and Middle</u></p> <p>1%-ile of baseline for surface and middle layer (4.57 mg/L)</p> <p><u>Bottom</u></p> <p>1%-ile of baseline data for bottom layer (4.46 mg/L)</p>



Parameter	Action Level	Limit Level
SS in mg/L (Depth-averaged b) c	95%-ile of baseline data (5.40 mg/L) and 20% exceedance of value at any impact station compared with corresponding data from control stations	99%-ile of baseline data (5.71 mg/L) and 30% exceedance of value at any impact station compared with corresponding data from control stations
Turbidity in NTU (Depth-averaged a) c	95%-ile of baseline data (4.92 NTU) and 20% exceedance of value at any impact station compared with corresponding data from control stations	99%-ile of baseline data (5.11 NUT) and 30% exceedance of value at any impact station compared with corresponding data from control stations

**Notes:**

- For DO, non-compliance of the water quality limits occurs when monitoring result is lower than the limits.
- “Depth-averaged” is calculated by taking the arithmetic means of reading of all three depths (at 1 metre below surface, mid-depth and 1 metre above seabed for the definition of sampling water depth).
- For SS and turbidity, non-compliance of the water quality limits occurs when monitoring result is higher than the limits.

### 3.5

#### EVENT AND ACTION PLAN

The Event and Action Plan for water quality monitoring which was stipulated in *EM&A Requirement* is presented in *Table 3.4*.

**Table 3.4** *Event Action Plan for Water Quality*

Event	Contractor
Action Level Exceedance	<p><b>Step 1</b> - repeat sampling event to confirm findings.</p> <p><b>Step 2</b> - if findings are confirmed, discuss with cable installation contractor the most appropriate method of reducing suspended solids during cable installation (e.g. reduce cable laying speed/ volume of water used during installation, increase effectiveness of silt curtain).</p> <p><b>Step 3</b> - repeat measurements after implementation of mitigation for confirmation of compliance.</p> <p><b>Step 4</b> - if non-compliance continues - increase measures in Step 2 and repeat measurements in Step 3. If non-compliance occurs at a third time, the cable laying operations should be suspended.</p>
Limit Level Exceedance	<p>Inform EPD and AFCD and confirm notification of the non-compliance in writing within 24 hours after a limit level exceedance is recorded.</p> <p>Undertake <b>Steps 1-3</b> immediately, if further non-compliance continues at the Limit Level, suspend cable laying operations until an effective solution is identified.</p>

A total of four (4) monitoring events (days) were scheduled during water quality impact monitoring from 14 March to 3 April 2016 (*Annex A*). In each monitoring day (18, 21, 23 and 29 March 2016), two rounds of water quality measurement and sampling were undertaken, at mid-ebb and mid-flood tidal stage respectively. Monitoring events at all designated monitoring stations were performed on schedule.

The results from the monitoring for water quality impacts between 21 December 2015 and 3 April 2016, and their graphical presentations are included in *Annex D*. No exceedances of Action and Limit Levels were recorded in the monitoring period. The monitoring results of Turbidity, SS and DO are discussed together as follows.

The DO concentrations at all the water depths (surface, mid-depth and bottom) during the impact monitoring were generally above 7.0 mg/L, well above the Action Level of 4.85 mg/L (for surface and mid-depth) and of 4.72 mg/L (for bottom depth) as shown in *Figure D1-D3* of *Annex D*. Recorded DO levels at each water depth were similar among the stations and throughout the reporting period (between 14 March and 3 April 2016). No exceedances of Action and Limit Levels were observed in the reporting period.

Depth-averaged turbidity levels recorded from the initial water quality impact monitoring (22 December 2015) up to the latest monitoring event (29 March 2016) are shown in *Figure D4* of *Annex D*. Turbidity levels in the reporting period (between 14 March and 3 April 2016) were between 1.2 NTU and 3.1 NTU, below the Action Level of 4.92 NTU.

SS levels recorded in the reporting period (between 14 March and 3 April 2016) were on average between 1.4 mg/L and 3.7 mg/L, below the Action Level of 5.4 mg/L (*Figure D5* of *Annex D*). In general, levels of depth-averaged SS measured since impact monitoring started have shown a minor variation over time.

It is noted the overall higher turbidity and SS levels at control station C1 compared to other stations were observed on 18 and 21 March 2016 in the reporting period (14 March to 3 April 2016). Control station C1 is located sufficiently far away from the Project works area that it is not expected to be affected by cable installation works. As such, relatively higher turbidity and SS levels at control station C1 on 18 and 21 March 2016 are not considered as the impact from cable installation works, but a result of natural background variation.

In general, during the reporting period (14 March to 3 April 2016), some variation in water quality (turbidity, and SS levels) was recorded among the stations; however the recorded parameters at the impact stations did not exceed Action or Limit Levels.

5 *ENVIRONMENTAL NON-CONFORMANCES*

5.1 *SUMMARY OF ENVIRONMENTAL EXCEEDANCE*

No exceedances of the Action and Limit Levels were recorded during the reporting period.

5.2 *SUMMARY OF ENVIRONMENTAL NON-COMPLIANCE*

No non-compliance events were recorded during the reporting period.

5.3 *SUMMARY OF ENVIRONMENTAL COMPLAINT*

No complaints were received during the reporting period.

5.4 *SUMMARY OF ENVIRONMENTAL SUMMONS AND PROSECUTION*

No summons or prosecution on environmental matters were received during the reporting period.

No exceedances have been recorded in the whole water quality impact monitoring period (from 21 December 2015 to 3 April 2016), and future key issues are not anticipated. As stipulated in the Project Profile *EM&A Requirement*, reporting will be bi-weekly covering two weeks'-worth of monitoring surveys so long as no exceedances are recorded.

This *Seventh Water Quality Impact Monitoring Report* presents the results and findings of water quality impact monitoring undertaken during the period from 14 March to 3 April 2016 in accordance with the *EM&A Requirement* and the requirements under Environmental Permit (EP - 461/2013) for the Project.

No exceedances of Action and Limit Levels were recorded during the reporting period (14 March to 3 April 2016). No complaints or summons/prosecutions were received either during the reporting period.

Minor fluctuations and some small differences of Turbidity and SS levels among the sampling stations were recorded in the reporting period. DO levels at each water depth were similar among the stations and throughout the reporting period.

In general, the overall water quality at the impact stations was found to be similar to that at the control stations. It is concluded that there was no deterioration of water quality during the reporting period due the effect of the Project cable installation works.

Overall, no exceedances of Action and Limit Levels have been recorded during the whole water quality impact monitoring period (from 21 December 2015 to 3 April 2016) with some breaks when there were no construction works. As stipulated in the Project Profile *EM&A Requirement*, reporting will continue on a bi-weekly basis so long as no exceedances are recorded.

Annex A

## Impact Water Quality Monitoring Schedule

**Replacement of the Existing 11 KV Submarine Cable Circuit Connecting  
Liu Ko Ngam and Pak Sha Tau at Kat O  
Impact Marine Water Quality Monitoring (WQM) Schedule**

Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
20-Dec	21-Dec	22-Dec	23-Dec	24-Dec	25-Dec	26-Dec
		<b>WQM</b> Mid-Ebb 9:19 (07:34 - 11:04) Mid-Flood 15:29 (13:44 - 17:14)		<b>WQM</b> Mid-Ebb 11:13 (09:28 - 12:58) Mid-Flood 17:10 (15:25 - 18:55)		
27-Dec	28-Dec	29-Dec	30-Dec	31-Dec	01-Jan	02-Jan
		<b>WQM</b> Mid-Flood 9:14 (07:29 - 10:59) Mid-Ebb 14:31 (12:46 - 16:16)		<b>WQM</b> Mid-Flood 10:44 (08:59 - 12:29) Mid-Ebb 16:12 (14:27 - 17:57)		
03-Jan	04-Jan	05-Jan	06-Jan	07-Jan	08-Jan	09-Jan
			<b>WQM</b> Mid-Ebb 9:36 (07:12 - 10:42) Mid-Flood 15:05 (13:20 - 16:50)		<b>WQM</b> Mid-Ebb 11:09 (09:24 - 12:54) Mid-Flood 16:35 (14:50 - 18:20)	
10-Jan	11-Jan	12-Jan	13-Jan	14-Jan	15-Jan	16-Jan
			<b>WQM</b> Mid-Flood 8:57 (08:19 - 11:49) Mid-Ebb 14:38 (12:53 - 16:23)		<b>WQM</b> Mid-Flood 10:27 (08:42 - 12:12) Mid-Ebb 16:25 (14:40 - 18:10)	
17-Jan	18-Jan	19-Jan	20-Jan	21-Jan	22-Jan	23-Jan
			<b>WQM</b> Mid-Ebb 8:58 (07:13 - 10:43) Mid-Flood 15:00 (13:15 - 16:45)		<b>WQM</b> Mid-Ebb 11:00 (09:15 - 12:45) Mid-Flood 16:52 (15:07 - 18:37)	
24-Jan	25-Jan	26-Jan	27-Jan	28-Jan	29-Jan	30-Jan
<b>No construction works scheduled, therefore no water quality monitoring works were carried out.</b>						
31-Jan	01-Feb	02-Feb	03-Feb	04-Feb	05-Feb	06-Feb
	<b>WQM</b> Mid-Flood 11:47 (10:02 - 13:32) Mid-Ebb 18:14 (16:29 - 19:59)					
07-Feb	08-Feb	09-Feb	10-Feb	11-Feb	12-Feb	13-Feb
				<b>No construction works scheduled, therefore no water quality monitoring works were carried out.</b>		
14-Feb	15-Feb	16-Feb	17-Feb	18-Feb	19-Feb	20-Feb
				<b>WQM</b> Mid-Ebb 8:48 (07:03 - 10:33) Mid-Flood 14:36 (12:51 - 16:21)		
21-Feb	22-Feb	23-Feb	24-Feb	25-Feb	26-Feb	27-Feb
				<b>WQM</b> Mid-Flood 8:12 (06:27 - 09:57) Mid-Ebb 14:02 (12:17 - 15:47)		<b>WQM</b> Mid-Flood 9:11 (07:26 - 10:56) Mid-Ebb 15:11 (13:26 - 16:56)
28-Feb	29-Feb	01-Mar	02-Mar	03-Mar	04-Mar	05-Mar
	<b>WQM</b> Mid-Flood 10:12 (08:27 - 11:57) Mid-Ebb 16:30 (14:45 - 18:15)					

**Replacement of the Existing 11 KV Submarine Cable Circuit Connecting  
Liu Ko Ngam and Pak Sha Tau at Kat O  
Impact Marine Water Quality Monitoring (WQM) Schedule**

Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
06-Mar	07-Mar	08-Mar	09-Mar	10-Mar	11-Mar	12-Mar
					<b>WQM</b> Mid-Flood 8:04 (06:19 - 09:49) Mid-Ebb 14:09 (12:24 - 15:54)	
13-Mar	14-Mar	15-Mar	16-Mar	17-Mar	18-Mar	19-Mar
					<b>WQM</b> Mid-Ebb 8:47 (07:20 - 10:15) Mid-Flood 14:16 (12:31 - 16:01)	
20-Mar	21-Mar	22-Mar	23-Mar	24-Mar	25-Mar	26-Mar
<b>WQM</b> Mid-Ebb 11:21 (09:36 - 13:06) Mid-Flood 17:18 (15:33 - 19:03)			<b>WQM</b> Mid-Ebb 12:34 (10:49 - 14:19) Mid-Flood 18:40 (16:55 - 20:25)			
27-Mar	28-Mar	29-Mar	30-Mar	31-Mar	01-Apr	02-Apr
		<b>WQM</b> Mid-Flood 9:32 (07:47 - 11:17) Mid-Ebb 16:01 (14:16 - 17:46)				



Annex B

## Calibration Reports of Multi-parameter Sensor



### Internal Calibration Report of Dissolved Oxygen Meter

Equipment Ref. No. : <u>ET/EW/008/006</u>	Manufacturer : <u>YSI</u>
Model No. : <u>Pro 2030</u>	Serial No. : <u>12A 100554</u>
Date of Calibration : <u>19/03/2016</u>	Calibration Due Date : <u>18/04/2016</u>

#### *Temperature Verification*

Ref. No. of Reference Thermometer : ET/0521/017

Ref. No. of Water Bath : ---

	Temperature (°C)			
	Reference Thermometer reading	Measured	Corrected	
		20.0		19.9
DO Meter reading	Measured	19.8	Difference	0.1

#### *Standardization of sodium thiosulphate (Na<sub>2</sub>S<sub>2</sub>O<sub>3</sub>) solution*

Reagent No. of Na <sub>2</sub> S <sub>2</sub> O <sub>3</sub> titrant	CPE/012/4.5/001/13	Reagent No. of 0.025N K <sub>2</sub> Cr <sub>2</sub> O <sub>7</sub>	CPE/012/4.4/002/08
		Trial 1	Trial 2
Initial Vol. of Na <sub>2</sub> S <sub>2</sub> O <sub>3</sub> (ml)		0.00	10.15
Final Vol. of Na <sub>2</sub> S <sub>2</sub> O <sub>3</sub> (ml)		10.15	20.40
Vol. of Na <sub>2</sub> S <sub>2</sub> O <sub>3</sub> used (ml)		10.15	10.25
Normality of Na <sub>2</sub> S <sub>2</sub> O <sub>3</sub> solution (N)		0.02463	0.02439
Average Normality (N) of Na <sub>2</sub> S <sub>2</sub> O <sub>3</sub> solution (N)		0.02451	
Acceptance criteria, Deviation		Less than ± 0.001N	

Calculation: Normality of Na<sub>2</sub>S<sub>2</sub>O<sub>3</sub>, N = 0.25 / ml Na<sub>2</sub>S<sub>2</sub>O<sub>3</sub> used

#### *Linearity Checking*

##### *Determination of dissolved oxygen content by Winkler Titration \**

Purging Time (min)	2		5		10	
	1	2	1	2	1	2
Trial						
Initial Vol. of Na <sub>2</sub> S <sub>2</sub> O <sub>3</sub> (ml)	0.00	11.10	21.90	0.00	6.70	10.20
Final Vol. of Na <sub>2</sub> S <sub>2</sub> O <sub>3</sub> (ml)	11.10	21.90	28.60	6.70	10.20	14.00
Vol. (V) of Na <sub>2</sub> S <sub>2</sub> O <sub>3</sub> used (ml)	11.10	10.80	6.70	6.70	3.50	3.80
Dissolved Oxygen (DO), mg/L	7.30	7.11	4.41	4.41	2.30	2.50
Acceptance criteria, Deviation	Less than + 0.3mg/L		Less than + 0.3mg/L		Less than + 0.3mg/L	

Calculation: DO (mg/L) = V x N x 8000/298

Purging time, min	DO meter reading, mg/L			Winkler Titration result *, mg/L			Difference (%) of DO Content
	1	2	Average	1	2	Average	
2	7.45	7.46	7.46	7.30	7.11	7.21	3.41
5	4.31	4.28	4.30	4.41	4.41	4.41	2.53
10	2.25	2.38	2.32	2.30	2.50	2.40	3.39
Linear regression coefficient				0.9986			



## Internal Calibration Report of Dissolved Oxygen Meter

### *Zero Point Checking*

DO meter reading, mg/L	0.00
------------------------	------

### *Salinity Checking*

Reagent No. of NaCl (10ppt)	CPE/012/4.7/003/719	Reagent No. of NaCl (30ppt)	CPE/012/4.8/003/19
-----------------------------	---------------------	-----------------------------	--------------------

### *Determination of dissolved oxygen content by Winkler Titration \*\**

Salinity (ppt)	10		30	
Trial	1	2	1	2
Initial Vol. of Na <sub>2</sub> S <sub>2</sub> O <sub>3</sub> (ml)	0.00	11.30	22.50	32.10
Final Vol. of Na <sub>2</sub> S <sub>2</sub> O <sub>3</sub> (ml)	11.30	22.50	32.10	41.60
Vol. (V) of Na <sub>2</sub> S <sub>2</sub> O <sub>3</sub> used (ml)	11.30	11.20	9.60	9.50
Dissolved Oxygen (DO), mg/L	7.44	7.37	6.32	6.25
Acceptance criteria, Deviation	Less than + 0.3mg/L		Less than + 0.3mg/L	

Calculation:  $DO (mg/L) = V \times N \times 8000/298$

Salinity (ppt)	DO meter reading, mg/L			Winkler Titration result**, mg/L			Difference (%) of DO Content
	1	2	Average	1	2	Average	
10	7.55	7.60	7.58	7.44	7.37	7.41	2.27
30	6.43	6.46	6.45	6.32	6.25	6.29	2.51

### *Acceptance Criteria*

- (1) Differenc between temperature readings from temperature sensor of DO probe and reference thermometer : < 0.5 °C
- (2) Linear regression coefficient : >0.99
- (3) Zero checking: 0.0mg/L
- (4) Difference (%) of DO content from the meter reading and by winkler titration : within ± 5%

The equipment complies # / ~~does not comply~~ # with the specified requirements and is deemed acceptable # / ~~unacceptable~~ # for use.

# Delete as appropriate

Calibrated by

:

Approved by :



## Performance Check of Salinity Meter

Equipment Ref. No. : ET/EW/008/006      Manufacturer : YSI  
Model No. : Pro 2030      Serial No. : 12A 100554  
Date of Calibration : 19/03/2016      Due Date : 18/04/2016

Ref. No. of Salinity Standard used (30ppt)

S/001/5

Salinity Standard (ppt)	Measured Salinity (ppt)	Difference %
30.0	30.6	2.00


(\*) Difference (%) = (Measured Salinity – Salinity Standard value) / Salinity Standard value x 100

Acceptance Criteria

Difference : -10 % to 10 %

The salinity meter complies \* / ~~does not comply~~ \* with the specified requirements and is deemed acceptable \* / ~~unacceptable~~ \* for use. Measurements are traceable to national standards.

Checked by : 

Approved by : 



## Performance Check of Turbidity Meter

Equipment Ref. No. : ET/0505/011 Manufacturer : HACH

Model No. : 2100Q Serial No. : 11110 C 014260

Date of Calibration : 19/03/2015 Due Date : 18/04/2016

Ref. No. of Turbidity Standard used (4000NTU)

005/6.1/001/9

Theoretical Value of Turbidity Standard (NTU)	Measured Value (NTU)	Difference % *
20	19.8	-1.00
100	104	4.00
800	780	-2.50

(\*) Difference = (Measured Value – Theoretical Value) / Theoretical Value x 100

Acceptance Criteria

Difference : -5 % to 5 %

The turbidity meter complies \* / ~~does not comply~~ \* with the specified requirements and is deemed acceptable \* / ~~unacceptable~~ \* for use. Measurements are traceable to national standards.

Prepared by : 

Checked by : 

Annex C

## QA/QC Results for Suspended Solids Testing

**QA/QC Results of Laboratory Analysis of Total Suspended Solids**

Sampling Date	QC Sample	Sample Duplicate		Sample Spike	
	% Recovery *	Sample ID	% Error #	Sample ID	% Recovery @
3/18/2016	104.4	FC1-S1	0.00	FSR3-M2	92.2
	106.0	FSR3-B1	4.65	FG1-B2	106.0
	102.3	FG2-M1	1.59	EC2 -B2	96.5
	99.0	ESR1-M1	0.00	ESR5-M2	92.2
	97.0	ESR5-B1	0.00	EG3-B2	105.7
	106.7	EG2-M1	1.67	EC2 -B2	107.1

Note: (\*) % Recovery of QC sample should be between 85.5% to 113.5%.  
 (#) % Error of Sample Duplicate should be between 0% to 10%.  
 (@) % Recovery of Sample Spike should be between 80% to 120%.  
 (\*\*) % Error of Sample Duplicate >10% but invalid due to sample results less than PQL (2.0 mg/L).

Sampling Date	QC Sample	Sample Duplicate		Sample Spike	
	% Recovery *	Sample ID	% Error #	Sample ID	% Recovery @
3/21/2016	98.9	FC1-S1	0.00	FSR1-M2	97.5
	106.3	FG3-S1	0.00	FSR4-M2	105.8
	102.3	FSR4-B1	6.06	FC2 -B2	106.4
	102.2	EC1-S1	0.00	ESR1-M2	105.0
	107.8	EG3-S1	4.44	ESR4-M2	101.5
	107.2	ESR4-B1	0.00	EC2-B2	102.0

Note: (\*) % Recovery of QC sample should be between 85.5% to 113.5%.  
 (#) % Error of Sample Duplicate should be between 0% to 10%.  
 (@) % Recovery of Sample Spike should be between 80% to 120%.  
 (\*\*) % Error of Sample Duplicate >10% but invalid due to sample results less than PQL (2.0 mg/L).

Sampling Date	QC Sample	Sample Duplicate		Sample Spike	
	% Recovery *	Sample ID	% Error #	Sample ID	% Recovery @
3/23/2016	97.5	FC1-S1	3.51	FSR3-M2	93.8
	100.6	FSR3-B1	3.92	FG1-B2	103.3
	101.3	FG2-M1	7.41	EC2 -B2	99.2
	92.7	ESR1-M1	4.65	ESR5-M2	99.9
	103.9	ESR5-B1	3.92	EG3-B2	105.3
	---	---	---	---	---

Note: (\*) % Recovery of QC sample should be between 85.5% to 113.5%.  
 (#) % Error of Sample Duplicate should be between 0% to 10%.  
 (@) % Recovery of Sample Spike should be between 80% to 120%.  
 (\*\*) % Error of Sample Duplicate >10% but invalid due to sample results less than PQL (2.0 mg/L).

Sampling Date	QC Sample	Sample Duplicate		Sample Spike	
	% Recovery *	Sample ID	% Error #	Sample ID	% Recovery @
3/29/2016	104.7	FC1-S1	8.20	FSR3-M2	103.2
	104.6	FSR3-B1	1.80	FG1-B2	97.6
	93.7	FG2-M1	3.36	FG3 -B2	97.1
	96.6	EC1-M1	7.63	ESR3-M2	100.6
	102.0	ESR3-B1	3.54	EG1-B2	96.9
	100.7	EG2-M1	7.08	EG3 -B2	94.9


Note: (\*) % Recovery of QC sample should be between 85.5% to 113.5%.  
 (#) % Error of Sample Duplicate should be between 0% to 10%.  
 (@) % Recovery of Sample Spike should be between 80% to 120%.  
 (\*\*) % Error of Sample Duplicate >10% but invalid due to sample results less than PQL (2.0 mg/L).

Annex D

## Water Quality Monitoring Results



### Mid-ebb Dissolved Oxygen (Surface)

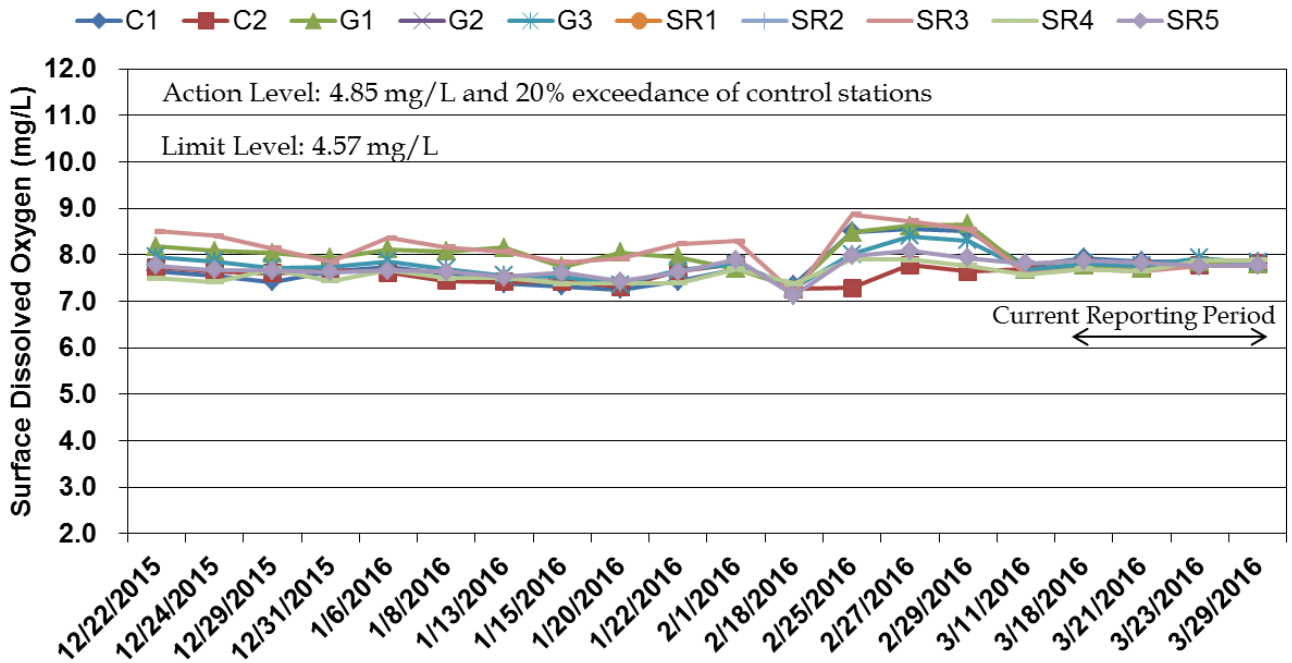

### Mid-flood Dissolved Oxygen (Surface)


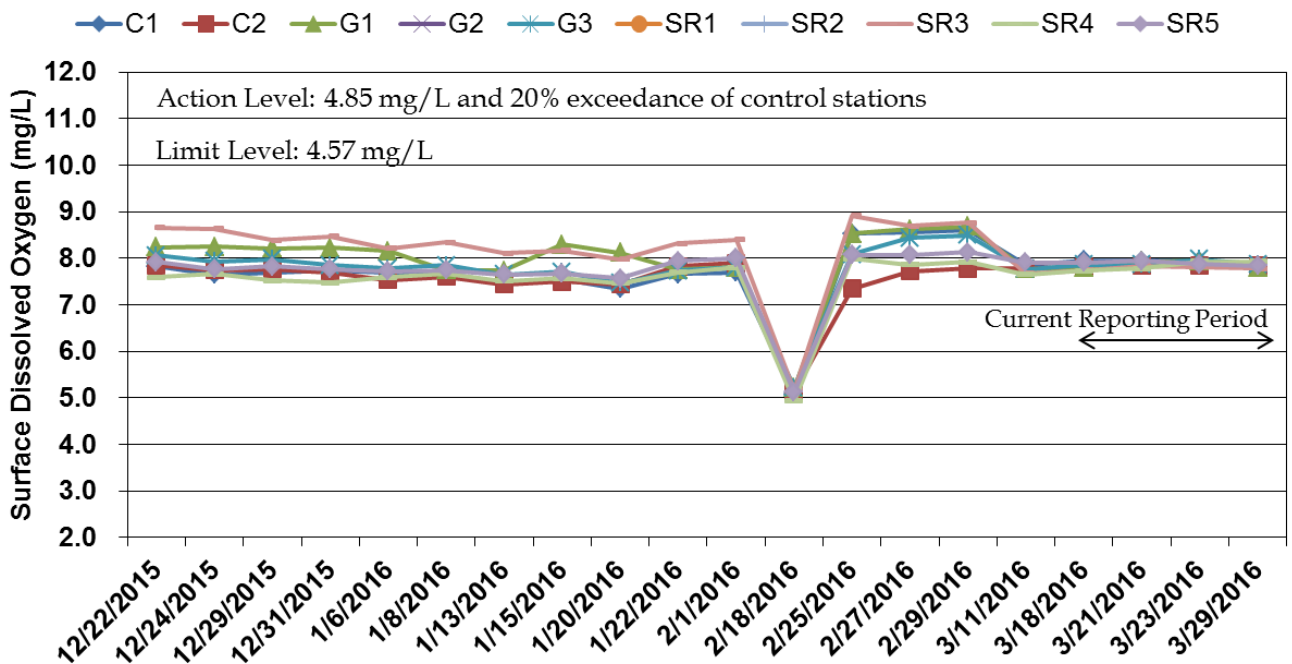


Figure D1 Dissolved oxygen (mg/L) at surface of water column measured during the impact monitoring period from 21 December 2015 to 3 April 2016



### Mid-ebb Dissolved Oxygen (Mid-depth)

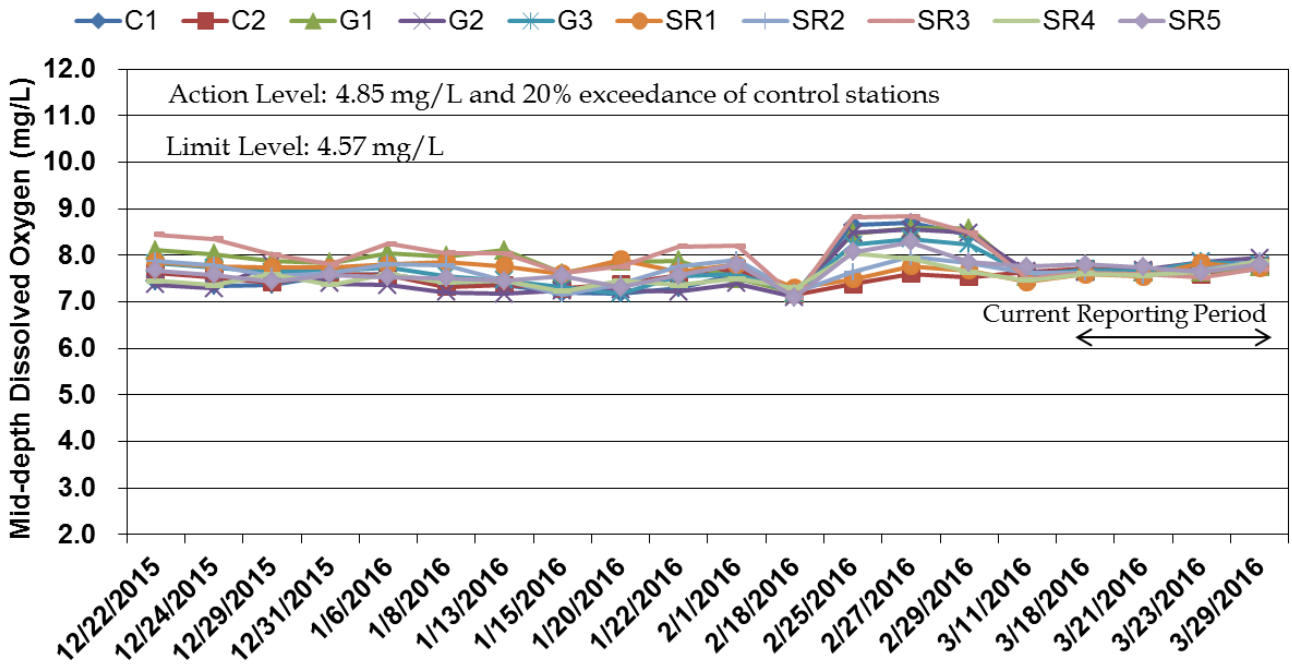

### Mid-flood Dissolved Oxygen (Mid-depth)


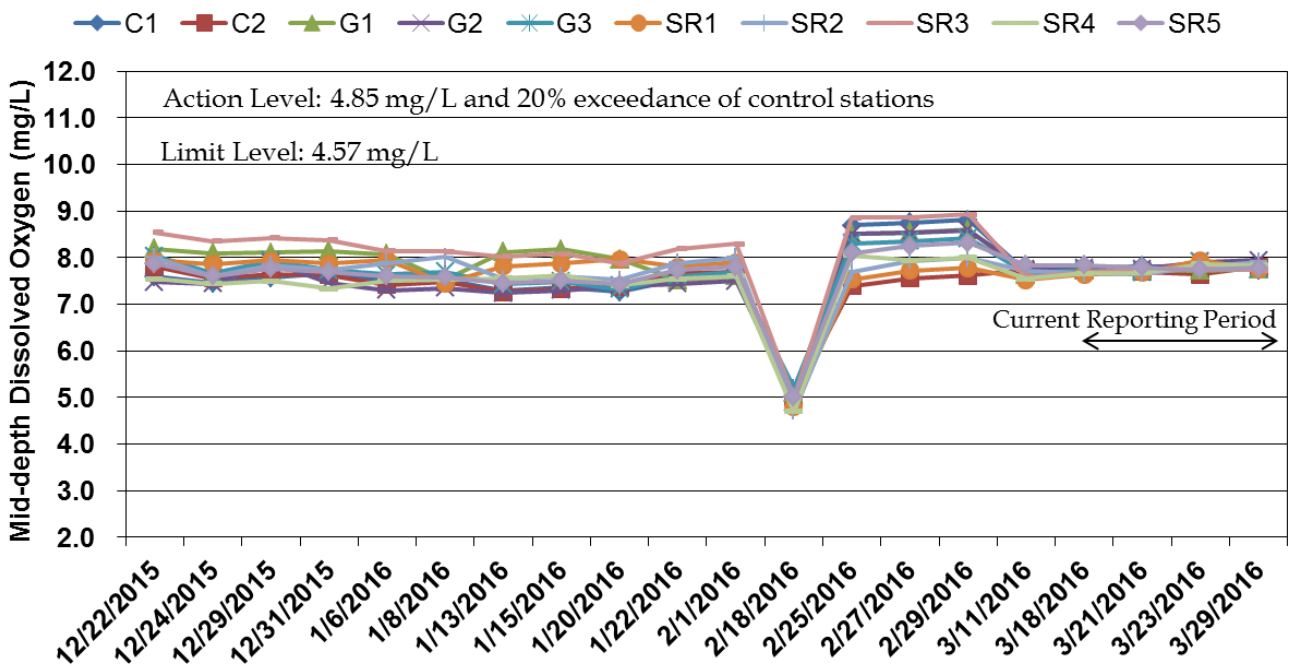


Figure D2 Dissolved oxygen (mg/L) at mid-depth of water column measured during the impact monitoring period from 21 December 2015 to 3 April 2016



### Mid-ebb Dissolved Oxygen (Bottom)

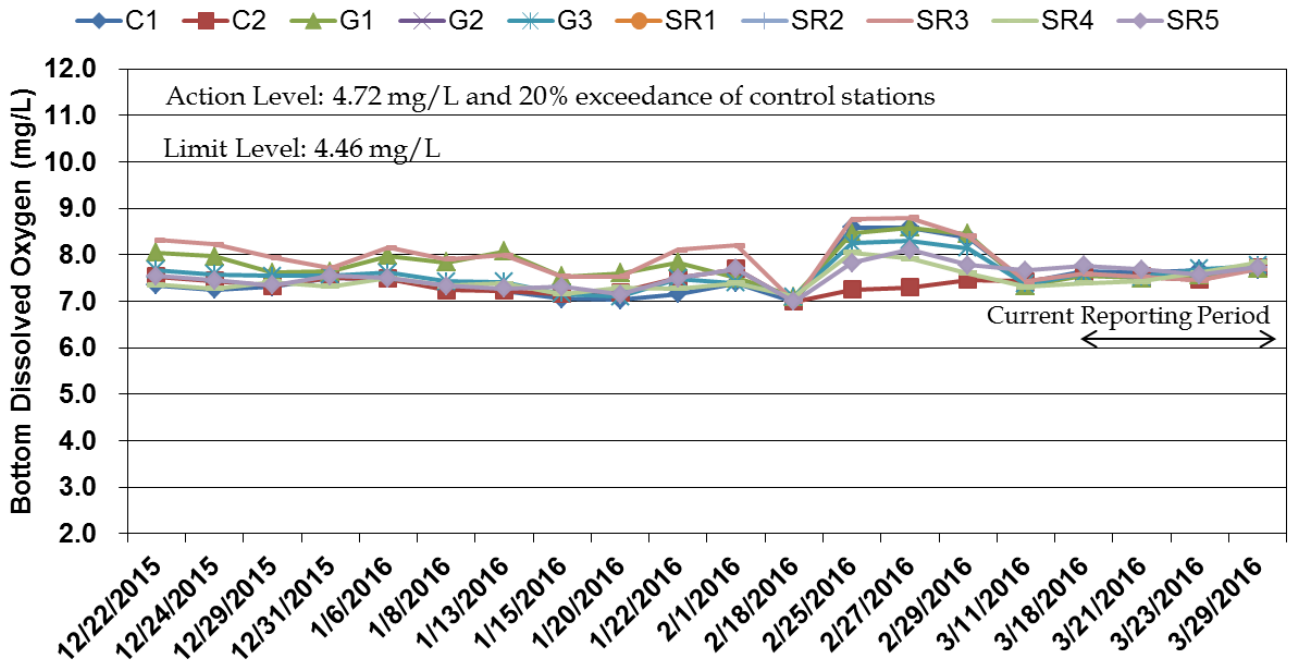

### Mid-flood Dissolved Oxygen (Bottom)


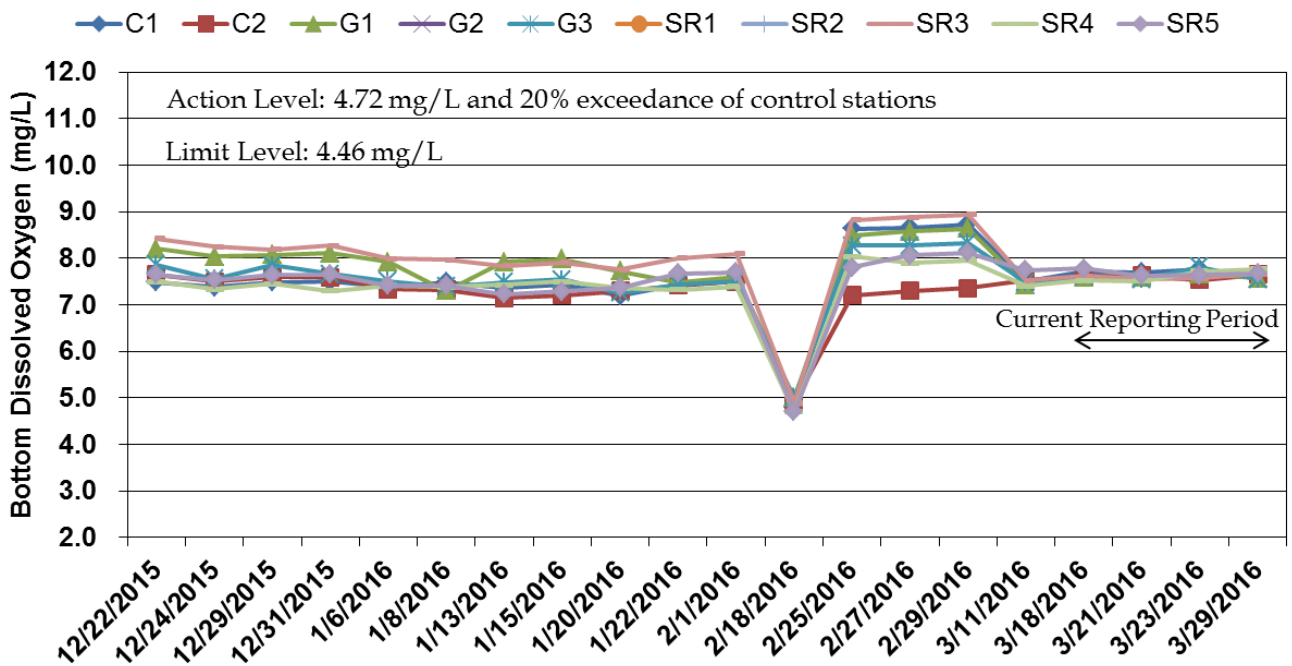


Figure D3 Dissolved oxygen (mg/L) at bottom of water column measured during the impact monitoring period from 21 December 2015 to 3 April 2016



### Mid-ebb Turbidity (Depth-averaged)

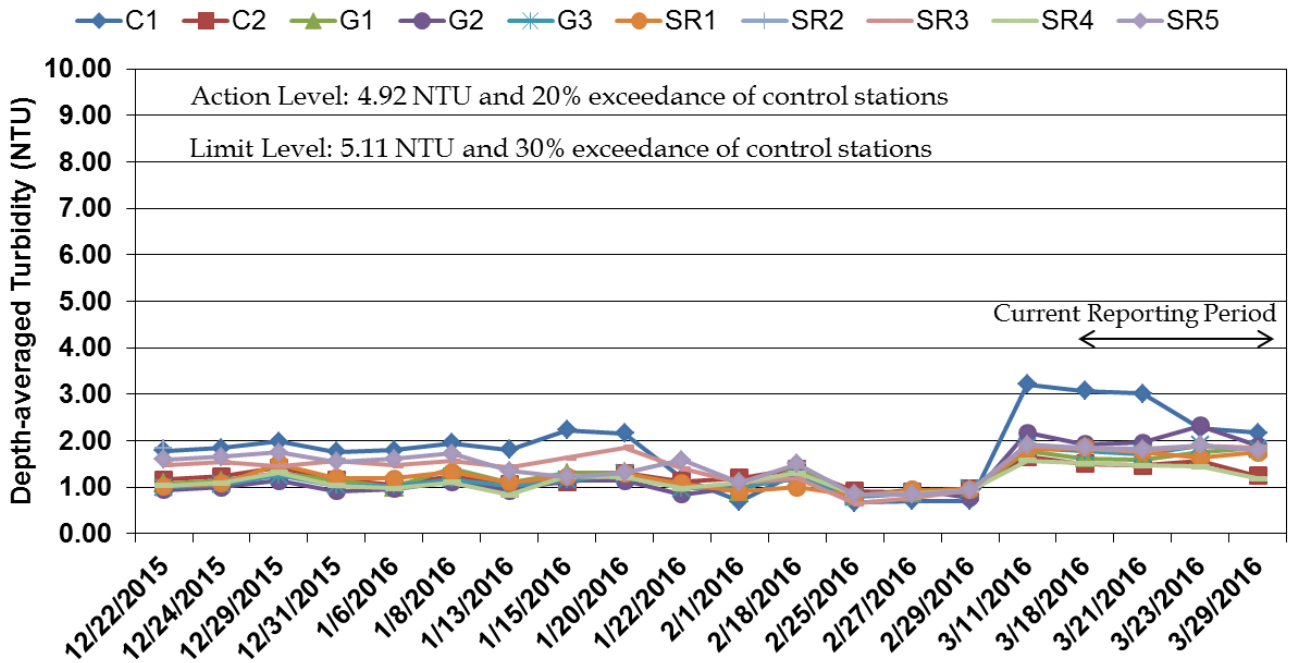

### Mid-flood Turbidity (Depth-averaged)


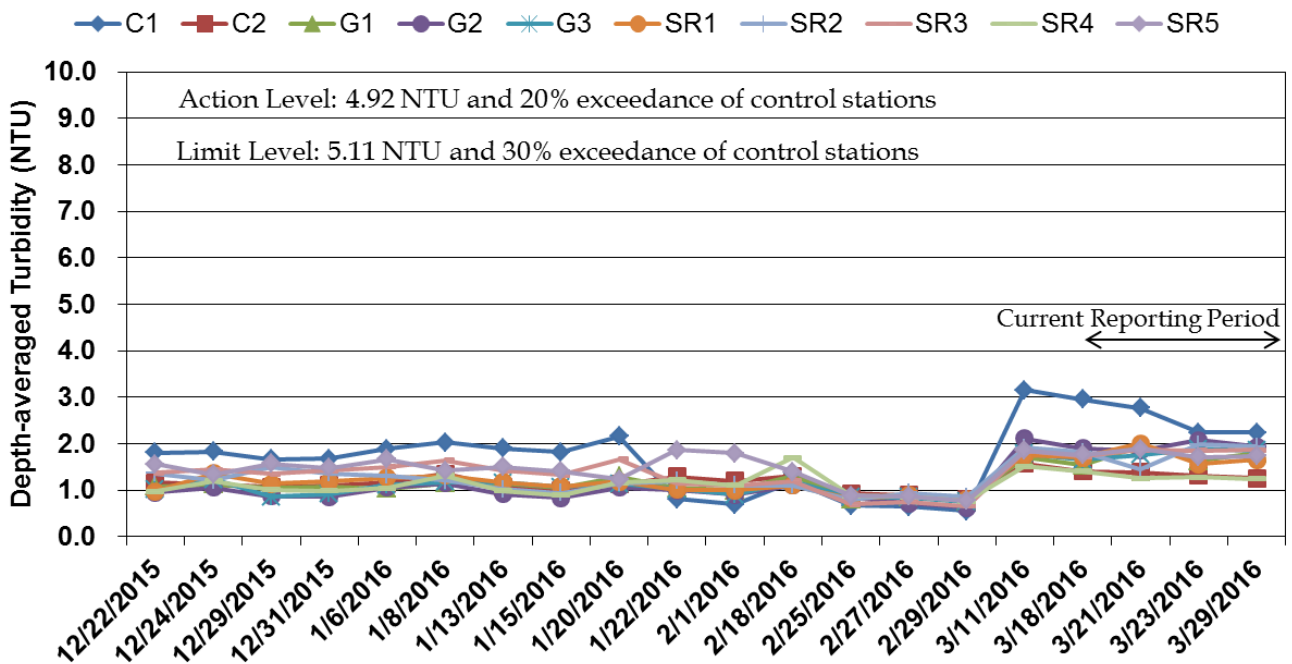


Figure D4 Depth-averaged turbidity (NTU) of water column measured during the impact monitoring period from 21 December 2015 to 3 April 2016



### Mid-ebb Suspended Solids (Depth-averaged)

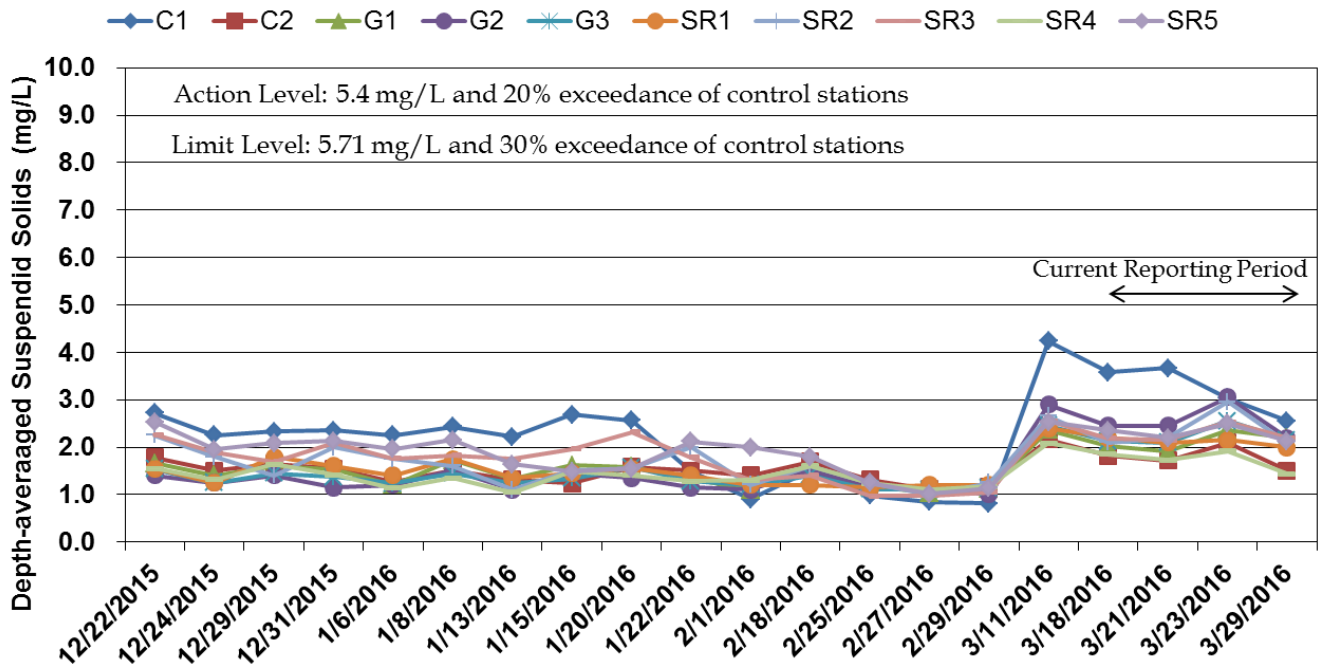

### Mid-flood Suspended Solids (Depth-averaged)

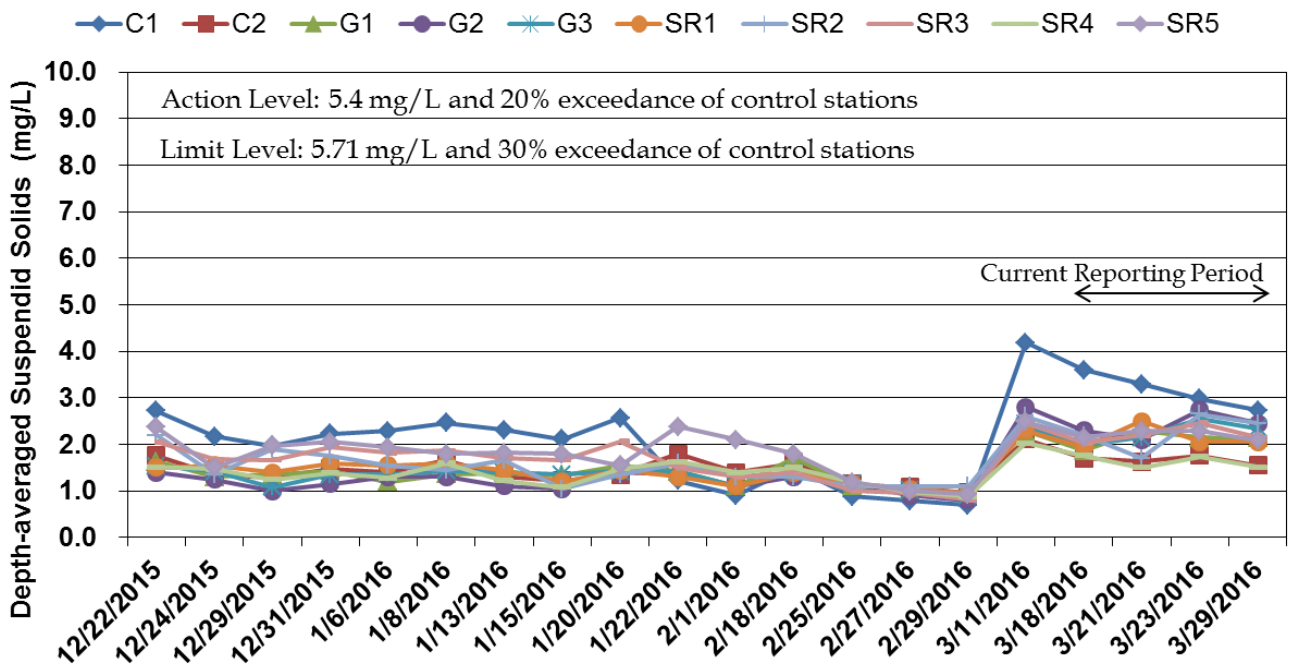


Figure D5 Depth-averaged suspended solid (mg/L) of water column measured during the impact monitoring period from 21 December 2015 to 3 April 2016



Date: 18-Mar-16  
Tide: Mid-Flood  
Weather: Cloudy  
Sea Conditions: Small Wave

Location	Sampling Time	Water Depth (m)	Current direction	Current speed (ms <sup>-1</sup> )	Monitoring Depth	Temperature (°C)			Salinity (ppt)			DO (mg/l)			DO Saturation (%)			Turbidity (NTU)				Suspended Solids (mg/l)			
						1	2	Ave.*	1	2	Ave.*	1	2	Ave.*	1	2	Ave.*	1	2	Ave.*	D.A.**	1	2	Ave.*	D.A.**
C1	1231-1242	14.6	S	0.2	Surface	17.4	17.4	17.4	28.2	28.2	28.2	8.0	8.0	8.0	98.6	98.0	98.3	2.8	2.8	2.8		3.3	3.4	3.4	
					Middle	17.3	17.3	17.3	28.2	28.2	28.2	7.8	7.8	7.8	96.4	95.7	96.1	2.9	2.9	2.9	3.0	3.7	3.5	3.6	3.6
					Bottom	17.0	17.0	17.0	28.4	28.4	28.4	7.7	7.7	7.7	95.1	94.5	94.8	3.1	3.2	3.2		3.8	3.9	3.9	
C2	1432-1500	13.8	S	0.2	Surface	17.4	17.4	17.4	28.2	28.2	28.2	7.8	7.8	7.8	96.9	96.2	96.6	1.3	1.3	1.3		1.7	1.5	1.6	
					Middle	17.3	17.3	17.3	28.2	28.2	28.2	7.8	7.7	7.7	95.9	95.3	95.6	1.4	1.4	1.4	1.4	1.6	1.7	1.7	1.7
					Bottom	17.0	17.0	17.0	28.3	28.4	28.4	7.6	7.6	7.6	94.4	93.9	94.2	1.5	1.6	1.5		2.0	1.7	1.9	
G1	1259-1310	12.4	S	0.1	Surface	17.5	17.5	17.5	28.3	28.3	28.3	7.8	7.8	7.8	96.9	96.4	96.7	1.3	1.4	1.3		1.6	1.6	1.6	
					Middle	17.4	17.4	17.4	28.3	28.3	28.3	7.7	7.7	7.7	95.9	95.1	95.5	1.5	1.6	1.6	1.5	1.9	1.9	1.9	1.9
					Bottom	17.2	17.1	17.2	28.5	28.5	28.5	7.6	7.6	7.6	93.6	92.9	93.3	1.7	1.8	1.7		2.1	2.1	2.1	
G2	1335-1342	1.8	S	0.1	Surface	---	---	---	---	---	---	---	---	---	---	---	---	---	---		---	---	---		
					Middle	17.2	17.2	17.2	28.2	28.2	28.2	7.8	7.8	7.8	95.9	95.5	95.7	1.9	1.9	1.9	1.9	2.5	2.1	2.3	2.3
					Bottom	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
G3	1323-1332	12.8	S	0.2	Surface	17.3	17.3	17.3	28.3	28.3	28.3	7.9	7.9	7.9	97.2	96.8	97.0	1.7	1.8	1.8		2.2	2.0	2.1	
					Middle	17.2	17.2	17.2	28.3	28.3	28.3	7.8	7.7	7.7	95.4	94.9	95.2	1.5	1.6	1.6	1.7	1.8	2.0	1.9	2.0
					Bottom	17.1	17.0	17.1	28.4	28.4	28.4	7.6	7.6	7.6	93.9	93.2	93.6	1.6	1.7	1.7		1.8	2.1	2.0	
SR1	1313-1319	2.4	S	0.2	Surface	---	---	---	---	---	---	---	---	---	---	---	---	---	---		---	---	---		
					Middle	17.3	17.2	17.3	28.2	28.2	28.2	7.7	7.6	7.6	94.4	93.8	94.1	1.7	1.7	1.7	1.7	2.1	1.8	2.0	2.0
					Bottom	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
SR2	1345-1351	1.8	S	0.1	Surface	---	---	---	---	---	---	---	---	---	---	---	---	---	---		---	---	---		
					Middle	17.3	17.2	17.3	28.2	28.2	28.2	7.7	7.7	7.7	94.6	94.4	94.5	1.9	1.8	1.8	1.8	2.2	2.2	2.2	2.2
					Bottom	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
SR3	1247-1256	9.2	S	0.1	Surface	17.3	17.3	17.3	28.2	28.2	28.2	7.8	7.7	7.7	95.5	95.3	95.4	1.5	1.6	1.6		2.0	2.0	2.0	
					Middle	17.3	17.3	17.3	28.2	28.2	28.2	7.7	7.7	7.7	95.0	94.6	94.8	1.7	1.7	1.7	1.7	1.8	1.9	1.9	2.0
					Bottom	17.2	17.1	17.2	28.4	28.4	28.4	7.6	7.6	7.6	94.2	93.8	94.0	1.9	2.0	1.9		2.1	2.4	2.3	
SR4	1412-1425	7.6	S	0.2	Surface	17.3	17.3	17.3	28.1	28.1	28.1	7.8	7.7	7.7	95.7	95.0	95.4	1.2	1.2	1.2		1.4	1.6	1.5	
					Middle	17.3	17.3	17.3	28.2	28.2	28.2	7.7	7.6	7.7	94.8	94.2	94.5	1.3	1.3	1.3	1.4	1.6	1.7	1.7	1.8
					Bottom	17.2	17.2	17.2	28.3	28.3	28.3	7.5	7.5	7.5	92.4	92.9	92.7	1.8	1.7	1.7		2.1	2.2	2.2	
SR5	1357-1410	9.4	S	0.2	Surface	17.3	17.3	17.3	28.1	28.2	28.2	7.9	7.9	7.9	97.9	97.4	97.7	1.6	1.7	1.7		2.1	2.1	2.1	
					Middle	17.2	17.2	17.2	28.2	28.2	28.2	7.9	7.8	7.8	96.7	96.1	96.4	1.7	1.8	1.7	1.8	2.2	2.1	2.2	2.2
					Bottom	17.0	17.0	17.0	28.3	28.3	28.3	7.8	7.8	7.8	95.6	95.2	95.4	1.9	1.9	1.9		2.1	2.3	2.2	

Remark or Observation:

1. \* Average; \*\* Depth Average

2. Each station was sampled and measurements/ water samples were taken at three depths, namely, 1 m below water surface, mid-depth and 1 m above sea bed, except where the water depth less than 6 m, the mid-depth station may be omitted. For stations that are less than 3 m in depth, only the mid-depth sample was taken.

Date: 18-Mar-16  
Tide: Mid-Ebb  
Weather: Cloudy  
Sea Conditions: Small Wave

Location	Sampling Time	Water Depth (m)	Current direction	Current speed (ms <sup>-1</sup> )	Monitoring Depth	Temperature (°C)			Salinity (ppt)			DO (mg/l)			DO Saturation (%)			Turbidity (NTU)				Suspended Solids (mg/l)			
						1	2	Ave.*	1	2	Ave.*	1	2	Ave.*	1	2	Ave.*	1	2	Ave.*	D.A.**	1	2	Ave.*	D.A.**
C1	0820-0833	14.2	S	0.1	Surface	17.0	17.1	17.1	28.3	28.3	28.3	7.9	7.9	7.9	94.2	94.5	94.4	2.9	2.9	2.9	3.1	3.2	3.7	3.5	3.6
					Middle	17.0	17.0	17.0	28.3	28.3	28.3	7.7	7.7	7.7	92.1	91.7	91.9	2.9	3.0	3.0	3.1	3.2	3.6	3.4	3.6
					Bottom	16.9	16.8	16.9	28.3	28.3	28.3	7.6	7.7	7.6	90.9	91.0	91.0	3.4	3.4	3.4		4.1	3.7	3.9	
C2	1002-1015	13.5	S	0.1	Surface	17.2	17.1	17.2	28.4	28.4	28.4	7.8	7.8	7.8	92.6	92.7	92.7	1.4	1.4	1.4		1.8	1.6	1.7	1.8
					Middle	17.1	17.1	17.1	28.4	28.4	28.4	7.7	7.7	7.7	91.9	91.6	91.8	1.4	1.4	1.4	1.5	1.8	1.7	1.8	1.8
					Bottom	17.0	17.0	17.0	28.4	28.4	28.4	7.6	7.6	7.6	90.1	90.2	90.2	1.7	1.7	1.7		1.8	2.2	2.0	
G1	0849-0902	12.1	S	0.1	Surface	17.0	16.9	17.0	28.3	28.3	28.3	7.8	7.8	7.8	92.3	92.7	92.5	1.4	1.4	1.4		1.5	1.9	1.7	2.0
					Middle	16.9	17.0	17.0	28.3	28.3	28.3	7.7	7.6	7.7	91.4	90.9	91.2	1.6	1.7	1.7	1.6	2.1	2.0	2.1	2.0
					Bottom	17.0	17.0	17.0	28.3	28.3	28.3	7.6	7.5	7.6	90.0	89.7	89.9	1.8	1.8	1.8		2.2	2.5	2.4	
G2	0923-0927	1.6	S	0.1	Surface	---	---	---	---	---	---	---	---	---	---	---	---	---	---		---	---	---	---	
					Middle	17.1	17.1	17.1	28.4	28.4	28.4	7.6	7.6	7.6	90.7	90.8	90.8	1.9	1.9	1.9	1.9	2.4	2.5	2.5	2.5
					Bottom	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---		---	---	---
G3	0908-0922	12.4	S	0.1	Surface	17.2	17.1	17.2	28.4	28.4	28.4	7.8	7.8	7.8	92.8	93.2	93.0	1.8	1.8	1.8		2.0	2.2	2.1	2.1
					Middle	17.1	17.1	17.1	28.4	28.4	28.4	7.7	7.7	7.7	91.5	91.7	91.6	1.7	1.7	1.7	1.8	2.2	1.9	2.1	2.1
					Bottom	17.0	17.0	17.0	28.4	28.4	28.4	7.6	7.6	7.6	90.2	90.4	90.3	1.8	1.8	1.8		2.1	2.4	2.3	
SR1	0903-0907	2.0	S	0.1	Surface	---	---	---	---	---	---	---	---	---	---	---	---	---	---		---	---	---	---	
					Middle	1.0	1.0	1.0	28.3	28.3	28.3	7.6	7.6	7.6	90.4	90.2	90.3	1.8	1.9	1.9	1.9	2.2	2.2	2.2	2.2
					Bottom	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---		---	---	---
SR2	0928-0932	1.6	S	0.1	Surface	---	---	---	---	---	---	---	---	---	---	---	---	---	---		---	---	---	---	
					Middle	17.1	17.1	17.1	28.4	28.4	28.4	7.6	7.6	7.6	90.7	90.8	90.8	1.9	1.9	1.9	1.9	2.1	2.1	2.1	2.1
					Bottom	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---		---	---	---
SR3	0834-0848	8.9	S	0.1	Surface	17.1	17.1	17.1	28.4	28.4	28.4	7.7	7.7	7.7	91.7	91.4	91.6	1.6	1.6	1.6		1.8	1.9	1.9	1.9
					Middle	17.0	17.1	17.1	28.3	28.3	28.3	7.6	7.6	7.6	90.7	90.9	90.8	1.8	1.8	1.8	1.8	2.2	2.2	2.2	2.2
					Bottom	17.0	17.0	17.0	28.3	28.3	28.3	7.6	7.6	7.6	90.3	90.4	90.4	2.1	2.1	2.1		2.5	2.5	2.5	
SR4	0948-1001	7.3	S	0.1	Surface	17.2	17.1	17.2	28.4	28.4	28.4	7.7	7.7	7.7	91.6	91.5	91.6	1.3	1.4	1.3		1.6	1.6	1.6	1.9
					Middle	17.2	17.0	17.1	28.4	28.4	28.4	7.6	7.6	7.6	90.7	90.2	90.5	1.4	1.4	1.4	1.5	1.5	1.8	1.7	1.9
					Bottom	17.0	17.0	17.0	28.4	28.4	28.4	7.4	7.4	7.4	88.1	87.9	88.0	1.8	1.8	1.8		2.2	2.4	2.3	
SR5	0933-0947	9.0	S	0.1	Surface	17.1	17.1	17.1	28.4	28.4	28.4	7.9	7.9	7.9	93.7	93.9	93.8	1.8	1.8	1.8		2.3	2.2	2.3	2.4
					Middle	17.0	17.1	17.1	28.4	28.4	28.4	7.8	7.8	7.8	93.1	92.8	93.0	1.9	1.8	1.9	1.9	2.4	2.4	2.4	2.4
					Bottom	17.0	17.0	17.0	28.4	28.4	28.4	7.7	7.8	7.8	92.1	92.7	92.4	1.9	1.9	1.9		2.5	2.3	2.4	

Remark or Observation:

1. \* Average; \*\* Depth Average

2. Each station was sampled and measurements/ water samples were taken at three depths, namely, 1 m below water surface, mid-depth and 1 m above sea bed, except where the water depth less than 6 m, the mid-depth station may be omitted. For stations that are less than 3 m in depth, only the mid-depth sample was taken.

Date: 21-Mar-16  
Tide: Mid-Flood  
Weather: Cloudy  
Sea Conditions: Small Wave

Location	Sampling Time	Water Depth (m)	Current direction	Current speed (ms <sup>-1</sup> )	Monitoring Depth	Temperature (°C)			Salinity (ppt)			DO (mg/l)			DO Saturation (%)			Turbidity (NTU)				Suspended Solids (mg/l)			
						1	2	Ave.*	1	2	Ave.*	1	2	Ave.*	1	2	Ave.*	1	2	Ave.*	D.A.**	1	2	Ave.*	D.A.**
C1	1533-1548	14.7	S	0.2	Surface	17.0	16.9	17.0	28.1	28.2	28.2	7.9	8.0	8.0	97.9	98.1	98.0	2.6	2.7	2.6		3.2	3.2	3.2	
					Middle	16.8	16.8	16.8	28.3	28.4	28.4	7.8	7.8	7.8	95.9	95.7	95.8	2.8	2.8	2.8	2.8	3.0	3.3	3.2	3.3
					Bottom	16.7	16.6	16.7	28.5	28.5	28.5	7.7	7.7	7.7	94.0	94.2	94.1	2.9	2.9	2.9		3.7	3.4	3.6	
C2	1757-1803	13.6	S	0.1	Surface	16.9	16.8	16.9	28.1	28.2	28.2	7.9	7.8	7.8	96.7	96.5	96.6	1.2	1.3	1.2		1.3	1.6	1.5	
					Middle	16.7	16.7	16.7	28.3	28.3	28.3	7.7	7.7	7.7	94.2	94.4	94.3	1.4	1.4	1.4	1.4	1.8	1.7	1.8	1.6
					Bottom	16.6	16.5	16.6	28.4	28.5	28.5	7.6	7.6	7.6	93.4	93.2	93.3	1.5	1.5	1.5		1.7	1.7	1.7	
G1	1614-1633	12.2	S	0.2	Surface	17.0	16.9	17.0	28.1	28.2	28.2	7.9	7.9	7.9	97.9	97.7	97.8	1.8	1.9	1.9		2.2	2.0	2.1	
					Middle	16.9	16.8	16.9	28.3	28.3	28.3	7.8	7.7	7.7	95.0	94.8	94.9	1.9	2.0	2.0	1.9	2.1	2.5	2.3	2.3
					Bottom	16.7	16.7	16.7	28.4	28.5	28.5	7.6	7.6	7.6	93.1	92.9	93.0	2.0	2.1	2.0		2.4	2.5	2.5	
G2	1710-1720	1.9	S	0.1	Surface	---	---	---	---	---	---	---	---	---	---	---	---	---	---		---	---	---		
					Middle	16.7	16.8	16.8	28.3	28.3	28.3	7.8	7.8	7.8	95.0	95.2	95.1	1.8	1.9	1.9	1.9	2.0	2.2	2.1	2.1
					Bottom	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
G3	1658-1708	12.8	S	0.1	Surface	17.1	17.0	17.1	27.9	28.0	28.0	7.9	7.9	7.9	96.7	96.9	96.8	1.7	1.6	1.6		2.2	1.8	2.0	
					Middle	16.9	16.8	16.9	28.2	28.3	28.3	7.7	7.7	7.7	94.2	94.0	94.1	1.8	1.8	1.8	1.8	2.0	2.3	2.2	2.2
					Bottom	16.7	16.6	16.7	28.4	28.4	28.4	7.5	7.6	7.6	92.2	92.4	92.3	1.8	1.9	1.9		2.2	2.4	2.3	
SR1	1638-1653	2.3	S	0.2	Surface	---	---	---	---	---	---	---	---	---	---	---	---	---	---		---	---	---		
					Middle	16.7	16.8	16.8	28.4	28.4	28.4	7.7	7.7	7.7	93.9	94.1	94.0	2.0	2.0	2.0	2.0	2.4	2.6	2.5	2.5
					Bottom	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
SR2	1722-1732	1.6	S	0.2	Surface	---	---	---	---	---	---	---	---	---	---	---	---	---	---		---	---	---		
					Middle	16.9	16.8	16.9	28.2	28.2	28.2	7.7	7.6	7.7	93.9	93.7	93.8	1.5	1.5	1.5	1.5	1.6	1.8	1.7	1.7
					Bottom	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
SR3	1553-1609	8.9	S	0.2	Surface	17.1	16.9	17.0	28.0	28.1	28.1	7.8	7.9	7.8	96.5	96.7	96.6	1.8	1.8	1.8		2.0	2.2	2.1	
					Middle	16.8	16.7	16.8	28.2	28.2	28.2	7.7	7.8	7.7	94.2	94.4	94.3	1.8	1.8	1.8	1.9	2.0	2.0	2.0	2.2
					Bottom	16.6	16.5	16.6	28.3	28.4	28.4	7.5	7.6	7.6	92.2	92.4	92.3	2.0	2.0	2.0		2.4	2.6	2.5	
SR4	1746-1756	7.4	S	0.1	Surface	17.0	17.1	17.1	27.9	28.0	28.0	7.8	7.8	7.8	95.8	96.0	95.9	1.1	1.1	1.1		1.3	1.3	1.3	
					Middle	16.9	16.8	16.9	28.1	28.2	28.2	7.7	7.7	7.7	93.9	94.1	94.0	1.3	1.3	1.3	1.3	1.5	1.4	1.5	1.5
					Bottom	16.6	16.7	16.7	28.4	28.3	28.4	7.5	7.5	7.5	91.9	91.7	91.8	1.4	1.4	1.4		1.7	1.8	1.8	
SR5	1734-1744	9.4	S	0.2	Surface	17.1	17.0	17.1	28.1	28.2	28.2	8.0	7.9	7.9	98.0	97.8	97.9	1.8	1.8	1.8		2.1	2.1	2.1	
					Middle	16.9	16.9	16.9	28.3	28.4	28.4	7.8	7.8	7.8	95.6	95.4	95.5	1.8	1.9	1.9	1.9	2.3	2.5	2.4	2.3
					Bottom	16.7	16.8	16.8	28.5	28.5	28.5	7.6	7.6	7.6	93.1	93.3	93.2	2.0	2.1	2.1		2.4	2.3	2.4	

Remark or Observation:

1. \* Average; \*\* Depth Average

2. Each station was sampled and measurements/ water samples were taken at three depths, namely, 1 m below water surface, mid-depth and 1 m above sea bed, except where the water depth less than 6 m, the mid-depth station may be omitted. For stations that are less than 3 m in depth, only the mid-depth sample was taken.



Date: 21-Mar-16  
Tide: Mid-Ebb  
Weather: Cloudy  
Sea Conditions: Small Wave

Location	Sampling Time	Water Depth (m)	Current direction	Current speed (ms <sup>-1</sup> )	Monitoring Depth	Temperature (°C)			Salinity (ppt)			DO (mg/l)			DO Saturation (%)			Turbidity (NTU)				Suspended Solids (mg/l)			
						1	2	Ave.*	1	2	Ave.*	1	2	Ave.*	1	2	Ave.*	1	2	Ave.*	D.A.**	1	2	Ave.*	D.A.**
C1	1036-1046	14.4	S	0.1	Surface	17.2	17.3	17.3	28.2	28.3	28.3	7.9	7.9	7.9	97.6	97.0	97.3	2.8	2.9	2.8	3.0	3.4	3.5	3.5	3.7
					Middle	17.2	17.1	17.2	28.3	28.2	28.3	7.7	7.7	7.7	95.4	94.6	95.0	2.9	3.0	3.0	3.0	3.8	3.3	3.6	3.7
					Bottom	17.0	16.9	17.0	28.4	28.5	28.5	7.6	7.6	7.6	94.0	93.5	93.8	3.2	3.3	3.2		4.1	3.9	4.0	
C2	1254-1306	13.4	S	0.2	Surface	17.2	17.3	17.3	28.2	28.3	28.3	7.8	7.7	7.7	95.9	95.1	95.5	1.3	1.4	1.4	1.5	1.4	1.7	1.6	1.7
					Middle	17.2	17.1	17.2	28.3	28.2	28.3	7.7	7.6	7.7	94.9	94.2	94.6	1.4	1.5	1.5	1.5	1.7	1.6	1.7	1.7
					Bottom	16.9	17.0	17.0	28.4	28.5	28.5	7.6	7.5	7.5	93.4	92.9	93.2	1.6	1.6	1.6		1.9	2.0	2.0	
G1	1106-1116	12.0	S	0.2	Surface	17.4	17.3	17.4	28.1	28.2	28.2	7.7	7.7	7.7	95.9	95.3	95.6	1.4	1.4	1.4	1.6	1.5	1.7	1.6	
					Middle	17.3	17.2	17.3	28.3	28.2	28.3	7.7	7.6	7.6	94.9	94.1	94.5	1.6	1.6	1.6	1.6	2.1	2.0	2.1	1.9
					Bottom	17.1	17.0	17.1	28.4	28.5	28.5	7.5	7.5	7.5	92.6	91.9	92.3	1.8	1.8	1.8		2.0	2.2	2.1	
G2	1151-1159	1.6	S	0.1	Surface	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---		
					Middle	17.1	17.1	17.1	28.1	28.2	28.2	7.7	7.7	7.7	94.9	94.5	94.7	1.9	2.0	2.0	2.0	2.3	2.6	2.5	2.5
					Bottom	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
G3	1134-1146	12.6	S	0.1	Surface	17.2	17.1	17.2	28.2	28.1	28.2	7.8	7.8	7.8	96.2	95.8	96.0	1.8	1.8	1.8	1.7	2.2	2.1	2.2	2.1
					Middle	17.1	17.0	17.1	28.2	28.3	28.3	7.7	7.6	7.6	94.4	93.9	94.2	1.6	1.7	1.6	1.7	1.7	2.1	1.9	2.1
					Bottom	17.0	16.9	17.0	28.4	28.3	28.4	7.5	7.5	7.5	92.9	92.1	92.5	1.7	1.7	1.7		2.2	2.3	2.3	
SR1	1121-1129	2.2	S	0.2	Surface	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---		
					Middle	17.2	17.1	17.2	28.2	28.3	28.3	7.6	7.5	7.6	93.4	92.8	93.1	1.8	1.7	1.8	1.8	2.1	2.1	2.1	2.1
					Bottom	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
SR2	1204-1212	1.4	S	0.2	Surface	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---		
					Middle	17.2	17.1	17.2	28.2	28.3	28.3	7.6	7.6	7.6	93.5	93.4	93.5	1.9	1.9	1.9	1.9	2.1	2.3	2.2	2.2
					Bottom	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
SR3	1051-1101	8.8	S	0.2	Surface	17.2	17.1	17.2	28.2	28.3	28.3	7.7	7.7	7.7	94.4	94.2	94.3	1.6	1.6	1.6	1.8	2.1	1.8	2.0	
					Middle	17.2	17.2	17.2	28.3	28.3	28.3	7.6	7.6	7.6	94.0	93.5	93.8	1.7	1.8	1.7	1.8	2.0	2.0	2.0	2.2
					Bottom	17.0	17.1	17.1	28.5	28.4	28.5	7.5	7.5	7.5	93.2	92.7	93.0	2.0	2.0	2.0		2.4	2.6	2.5	
SR4	1234-1246	7.2	S	0.2	Surface	17.2	17.1	17.2	28.1	28.2	28.2	7.7	7.6	7.7	94.6	94.0	94.3	1.2	1.3	1.3	1.5	1.6	1.4	1.5	
					Middle	17.2	17.2	17.2	28.3	28.2	28.3	7.6	7.6	7.6	93.7	93.2	93.5	1.4	1.3	1.4	1.5	1.7	1.5	1.6	1.7
					Bottom	17.1	17.0	17.1	28.4	28.3	28.4	7.4	7.5	7.4	91.4	91.9	91.7	1.8	1.8	1.8		2.1	2.1	2.1	
SR5	1217-1229	9.2	S	0.2	Surface	17.2	17.1	17.2	28.0	28.1	28.1	7.8	7.8	7.8	96.9	96.4	96.7	1.7	1.8	1.7	1.8	1.9	2.1	2.0	
					Middle	17.1	17.0	17.1	28.1	28.2	28.2	7.8	7.7	7.8	95.6	95.1	95.4	1.8	1.8	1.8	1.8	2.1	2.4	2.3	2.2
					Bottom	16.9	17.0	17.0	28.3	28.4	28.4	7.7	7.7	7.7	94.6	94.2	94.4	2.0	1.9	1.9		2.4	2.3	2.4	

Remark or Observation:

1. \* Average; \*\* Depth Average

2. Each station was sampled and measurements/ water samples were taken at three depths, namely, 1 m below water surface, mid-depth and 1 m above sea bed, except where the water depth less than 6 m, the mid-depth station may be omitted. For stations that are less than 3 m in depth, only the mid-depth sample was taken.

Date: 23-Mar-16  
Tide: Mid-Flood  
Weather: Cloudy  
Sea Conditions: Small Wave

Location	Sampling Time	Water Depth (m)	Current direction	Current speed (ms <sup>-1</sup> )	Monitoring Depth	Temperature (°C)			Salinity (ppt)			DO (mg/l)			DO Saturation (%)			Turbidity (NTU)				Suspended Solids (mg/l)			
						1	2	Ave.*	1	2	Ave.*	1	2	Ave.*	1	2	Ave.*	D.A.**	1	2	Ave.*	D.A.**			
C1	1655-1706	14.4	E	0.2	Surface	17.4	17.5	17.5	28.4	28.5	28.5	7.9	8.0	7.9	98.7	99.1	98.9	2.1	2.2	2.1		2.8	3.0	2.9	
					Middle	17.3	17.2	17.3	28.6	28.5	28.6	7.8	7.8	7.8	97.3	97.6	97.5	2.3	2.2	2.2	2.2	3.0	2.9	3.0	3.0
					Bottom	17.2	17.2	17.2	28.8	28.7	28.8	7.8	7.8	7.8	96.3	96.7	96.5	2.4	2.3	2.3		3.2	3.0	3.1	
C2	1858-1909	14.0	E	0.1	Surface	17.5	17.4	17.5	28.4	28.3	28.4	7.8	7.9	7.9	97.5	97.6	97.6	1.1	1.1	1.1		1.5	1.5	1.5	
					Middle	17.3	17.3	17.3	28.5	28.4	28.5	7.6	7.6	7.6	94.9	94.8	94.9	1.3	1.3	1.3	1.3	1.7	1.8	1.8	1.8
					Bottom	17.2	17.3	17.3	28.6	28.6	28.6	7.5	7.5	7.5	93.7	93.5	93.6	1.5	1.6	1.5		2.0	2.1	2.1	
G1	1727-1730	12.6	E	0.1	Surface	17.3	17.4	17.4	28.4	28.4	28.4	8.0	7.9	8.0	99.1	98.8	99.0	1.7	1.8	1.7		2.2	2.3	2.3	
					Middle	17.4	17.5	17.5	28.5	28.4	28.5	7.7	7.7	7.7	95.9	96.1	96.0	1.5	1.6	1.5	1.6	2.0	2.1	2.1	2.2
					Bottom	17.3	17.2	17.3	28.6	28.5	28.6	7.7	7.7	7.7	95.6	95.2	95.4	1.6	1.6	1.6		2.2	2.1	2.2	
G2	1809-1815	2.3	E	0.2	Surface	---	---	---	---	---	---	---	---	---	---	---	---	---	---		---	---	---		
					Middle	17.5	17.4	17.5	28.3	28.4	28.4	7.9	7.9	7.9	98.5	98.6	98.6	2.1	2.0	2.1	2.1	2.8	2.7	2.8	2.8
					Bottom	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
G3	1754-1805	12.8	E	0.3	Surface	17.3	17.4	17.4	28.5	28.4	28.5	8.0	8.0	8.0	99.2	99.3	99.3	1.9	1.9	1.9		2.6	2.5	2.6	
					Middle	17.4	17.4	17.4	28.6	28.5	28.6	7.9	7.9	7.9	98.6	98.3	98.5	1.9	1.9	1.9	1.9	2.6	2.5	2.6	2.6
					Bottom	17.2	17.3	17.3	28.7	28.8	28.8	7.8	7.8	7.8	97.5	97.1	97.3	1.9	2.0	1.9		2.5	2.6	2.6	
SR1	1743-1750	2.9	E	0.1	Surface	---	---	---	---	---	---	---	---	---	---	---	---	---	---		---	---	---		
					Middle	17.4	17.4	17.4	28.3	28.4	28.4	8.0	7.9	7.9	98.9	98.7	98.8	1.5	1.6	1.6	1.6	2.0	2.1	2.1	2.1
					Bottom	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
SR2	1818-1824	2.2	E	0.2	Surface	---	---	---	---	---	---	---	---	---	---	---	---	---	---		---	---	---		
					Middle	17.3	17.4	17.4	28.4	28.3	28.4	7.8	7.8	7.8	97.5	96.9	97.2	2.0	2.0	2.0	2.0	2.6	2.7	2.7	2.7
					Bottom	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
SR3	1712-1722	9.1	E	0.2	Surface	17.5	17.5	17.5	28.3	28.2	28.3	7.8	7.8	7.8	97.5	97.3	97.4	1.9	1.8	1.9		2.5	2.5	2.5	
					Middle	17.4	17.5	17.5	28.3	28.4	28.4	7.8	7.7	7.8	96.7	96.3	96.5	1.8	1.8	1.8	1.9	2.3	2.4	2.4	2.5
					Bottom	17.3	17.4	17.4	28.5	28.4	28.5	7.6	7.6	7.6	94.2	94.0	94.1	2.0	1.9	1.9		2.6	2.5	2.6	
SR4	1842-1852	7.8	E	0.1	Surface	17.4	17.3	17.4	28.3	28.2	28.3	7.9	7.9	7.9	98.6	98.7	98.7	1.0	1.1	1.0		1.4	1.4	1.4	
					Middle	17.5	17.4	17.5	28.3	28.4	28.4	7.9	7.8	7.9	98.1	97.7	97.9	1.3	1.4	1.4	1.3	1.8	1.9	1.9	1.7
					Bottom	17.4	17.3	17.4	28.5	28.4	28.5	7.7	7.7	7.7	95.8	95.9	95.9	1.5	1.4	1.4		2.0	1.9	2.0	
SR5	1827-1838	9.9	E	0.3	Surface	17.5	17.4	17.5	28.4	28.3	28.4	7.9	7.9	7.9	97.8	98.0	97.9	1.5	1.6	1.6		2.0	2.1	2.1	
					Middle	17.3	17.4	17.4	28.5	28.4	28.5	7.7	7.8	7.8	96.2	96.5	96.4	1.9	1.8	1.9	1.7	2.5	2.5	2.5	2.3
					Bottom	17.3	17.3	17.3	28.6	28.5	28.6	7.7	7.6	7.6	96.1	94.7	95.4	1.7	1.7	1.7		2.3	2.3	2.3	

Remark or Observation:

1. \* Average; \*\* Depth Average

2. Each station was sampled and measurements/ water samples were taken at three depths, namely, 1 m below water surface, mid-depth and 1 m above sea bed, except where the water depth less than 6 m, the mid-depth station may be omitted. For stations that are less than 3 m in depth, only the mid-depth sample was taken.

Date: 23-Mar-16  
Tide: Mid-Ebb  
Weather: Cloudy  
Sea Conditions: Small Wave

Location	Sampling Time	Water Depth (m)	Current direction	Current speed (ms <sup>-1</sup> )	Monitoring Depth	Temperature (°C)			Salinity (ppt)			DO (mg/l)			DO Saturation (%)			Turbidity (NTU)				Suspended Solids (mg/l)			
						1	2	Ave.*	1	2	Ave.*	1	2	Ave.*	1	2	Ave.*	1	2	Ave.*	D.A.**	1	2	Ave.*	D.A.**
C1	1149-1201	13.8	S	0.2	Surface	17.6	17.5	17.6	28.2	28.2	28.2	7.9	7.8	7.9	97.6	97.1	97.4	2.1	2.0	2.0		2.8	2.7	2.8	
					Middle	17.4	17.3	17.4	28.4	28.5	28.5	7.8	7.7	7.8	96.2	95.8	96.0	2.3	2.3	2.3	2.3	3.1	3.1	3.1	3.0
					Bottom	17.3	17.3	17.3	28.6	28.5	28.6	7.7	7.7	7.7	95.1	94.5	94.8	2.4	2.4	2.4		3.3	3.2	3.3	
C2	1400-1419	13.6	S	0.2	Surface	17.7	17.7	17.7	28.3	28.3	28.3	7.8	7.8	7.8	96.5	96.9	96.7	1.4	1.3	1.4		1.9	1.8	1.9	
					Middle	17.3	17.3	17.3	28.4	28.4	28.4	7.6	7.6	7.6	93.8	93.5	93.7	1.8	1.8	1.8	1.6	2.4	2.4	2.4	2.1
					Bottom	17.1	17.2	17.2	28.5	28.5	28.5	7.5	7.5	7.5	92.1	91.7	91.9	1.6	1.6	1.6		2.1	2.0	2.1	
G1	1223-1233	12.2	S	0.3	Surface	17.5	17.6	17.6	28.3	28.3	28.3	7.8	7.9	7.8	96.9	97.4	97.2	1.8	1.9	1.8		2.4	2.4	2.4	
					Middle	17.3	17.2	17.3	28.4	28.4	28.4	7.7	7.6	7.6	94.8	94.1	94.5	1.7	1.8	1.7	1.8	2.3	2.4	2.4	2.4
					Bottom	17.2	17.2	17.2	28.5	28.6	28.6	7.6	7.5	7.6	93.3	92.9	93.1	1.7	1.7	1.7		2.4	2.3	2.4	
G2	1305-1312	1.8	S	0.2	Surface	---	---	---	---	---	---	---	---	---	---	---	---	---	---		---	---	---		
					Middle	17.5	17.4	17.5	28.4	28.5	28.5	7.9	7.8	7.9	97.6	97.2	97.4	2.3	2.3	2.3	2.3	3.1	3.0	3.1	3.1
					Bottom	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
G3	1250-1300	12.4	S	0.1	Surface	17.7	17.6	17.7	28.3	28.3	28.3	7.9	8.0	7.9	98.5	98.9	98.7	2.1	2.0	2.0		2.8	2.6	2.7	
					Middle	17.4	17.4	17.4	28.5	28.5	28.5	7.9	7.8	7.9	97.6	97.1	97.4	1.8	1.7	1.8	1.9	2.4	2.4	2.4	2.6
					Bottom	17.3	17.2	17.3	28.6	28.7	28.7	7.7	7.7	7.7	95.4	95.0	95.2	1.9	1.9	1.9		2.6	2.5	2.6	
SR1	1238-1245	2.4	S	0.2	Surface	---	---	---	---	---	---	---	---	---	---	---	---	---	---		---	---	---		
					Middle	17.3	17.4	17.4	28.4	28.5	28.5	7.9	7.8	7.8	97.1	96.8	97.0	1.6	1.7	1.6	1.6	2.1	2.2	2.2	2.2
					Bottom	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
SR2	1315-1322	1.6	S	0.2	Surface	---	---	---	---	---	---	---	---	---	---	---	---	---	---		---	---	---		
					Middle	17.4	17.4	17.4	28.4	28.4	28.4	7.7	7.7	7.7	95.0	95.5	95.3	2.2	2.2	2.2	2.2	3.0	2.9	3.0	3.0
					Bottom	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
SR3	1207-1218	8.6	S	0.3	Surface	17.6	17.6	17.6	28.2	28.2	28.2	7.7	7.8	7.8	96.0	96.4	96.2	1.7	1.7	1.7		2.2	2.3	2.3	
					Middle	17.4	17.4	17.4	28.3	28.4	28.4	7.5	7.5	7.5	92.9	93.4	93.2	1.9	1.9	1.9	1.9	2.6	2.6	2.6	2.5
					Bottom	17.2	17.2	17.2	28.5	28.5	28.5	7.5	7.4	7.5	92.1	91.7	91.9	2.0	2.1	2.1		2.7	2.8	2.8	
SR4	1341-1354	7.4	S	0.3	Surface	17.7	17.6	17.7	28.2	28.1	28.2	7.9	7.9	7.9	98.1	97.7	97.9	1.2	1.2	1.2		1.6	1.6	1.6	
					Middle	17.4	17.3	17.4	28.4	28.3	28.4	7.7	7.6	7.6	94.9	94.2	94.6	1.5	1.6	1.5	1.4	2.0	2.0	2.0	1.9
					Bottom	17.2	17.2	17.2	28.5	28.4	28.5	7.6	7.6	7.6	93.7	94.2	94.0	1.7	1.6	1.6		2.2	2.1	2.2	
SR5	1326-1336	9.4	S	0.3	Surface	17.6	17.6	17.6	28.3	28.2	28.3	7.8	7.7	7.8	96.6	96.1	96.4	1.8	1.8	1.8		2.3	2.4	2.4	
					Middle	17.5	17.4	17.5	28.5	28.6	28.6	7.6	7.7	7.6	94.5	95.0	94.8	2.0	1.9	1.9	1.9	2.6	2.6	2.6	2.5
					Bottom	17.3	17.4	17.4	28.6	28.6	28.6	7.6	7.6	7.6	93.8	93.4	93.6	1.9	2.0	2.0		2.5	2.6	2.6	

Remark or Observation:

1. \* Average; \*\* Depth Average

2. Each station was sampled and measurements/ water samples were taken at three depths, namely, 1 m below water surface, mid-depth and 1 m above sea bed, except where the water depth less than 6 m, the mid-depth station may be omitted. For stations that are less than 3 m in depth, only the mid-depth sample was taken.

Date: 29-Mar-16  
 Tide: Mid-Flood  
 Weather: Cloudy  
 Sea Conditions: Small Wave

Location	Sampling Time	Water Depth (m)	Current direction	Current speed (ms <sup>-1</sup> )	Monitoring Depth	Temperature (°C)			Salinity (ppt)			DO (mg/l)			DO Saturation (%)			Turbidity (NTU)				Suspended Solids (mg/l)			
						1	2	Ave.*	1	2	Ave.*	1	2	Ave.*	1	2	Ave.*	1	2	Ave.*	D.A.**	1	2	Ave.*	D.A.**
C1	0805-0817	14.6	E	0.2	Surface	17.8	17.7	17.8	28.6	28.7	28.7	7.8	7.9	7.9	97.5	97.8	97.7	2.1	2.1	2.1	2.2	2.3	2.5	2.4	2.7
					Middle	17.6	17.5	17.6	28.8	28.7	28.8	7.8	7.7	7.7	96.3	96.0	96.2	2.2	2.3	2.3	2.2	2.7	3.0	2.9	2.7
					Bottom	17.5	17.4	17.5	28.9	28.8	28.9	7.6	7.6	7.6	94.4	94.6	94.5	2.3	2.4	2.4	2.8	3.1	3.0	2.8	3.1
C2	1103-1114	14.2	E	0.2	Surface	17.7	17.6	17.7	28.6	28.5	28.6	7.9	7.8	7.8	98.2	98.0	98.1	1.1	1.2	1.2	1.3	1.3	1.3	1.6	1.7
					Middle	17.5	17.4	17.5	28.6	28.7	28.7	7.8	7.8	7.8	97.2	97.0	97.1	1.2	1.3	1.3	1.3	1.6	1.7	1.7	1.6
					Bottom	17.4	17.3	17.4	28.8	28.7	28.8	7.6	7.7	7.7	94.9	95.1	95.0	1.3	1.4	1.4	1.6	1.8	1.7	1.7	1.6
G1	0837-0848	12.3	E	0.2	Surface	17.7	17.8	17.8	28.6	28.5	28.6	7.8	7.8	7.8	97.2	97.0	97.1	1.8	1.7	1.8	1.8	2.3	2.2	2.3	2.1
					Middle	17.7	17.8	17.8	28.7	28.6	28.7	7.8	7.8	7.8	96.4	96.5	96.5	1.8	1.8	1.8	1.8	2.3	2.2	2.3	2.1
					Bottom	17.6	17.5	17.6	28.7	28.8	28.8	7.6	7.6	7.6	94.1	93.7	93.9	1.9	1.9	1.9	1.9	2.2	2.1	2.2	2.2
G2	0931-0949	2.4	E	0.1	Surface	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
					Middle	17.7	17.6	17.7	28.6	28.7	28.7	8.0	7.9	7.9	99.0	98.5	98.8	2.0	1.9	1.9	1.9	2.4	2.5	2.5	2.5
					Bottom	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
G3	0915-0926	12.7	E	0.2	Surface	17.7	17.6	17.7	28.5	28.6	28.6	7.9	7.9	7.9	97.8	98.0	97.9	1.7	1.8	1.8	1.9	2.3	2.3	2.3	2.4
					Middle	17.5	17.6	17.6	28.7	28.6	28.7	7.8	7.8	7.8	96.3	96.4	96.4	2.0	1.9	1.9	1.9	2.3	2.3	2.3	2.4
					Bottom	17.4	17.5	17.5	28.9	28.8	28.9	7.6	7.5	7.5	93.9	93.7	93.8	1.8	1.9	1.9	1.9	2.4	2.5	2.5	2.5
SR1	0852-0910	2.7	E	0.1	Surface	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
					Middle	17.6	17.7	17.7	28.8	28.7	28.8	7.7	7.8	7.7	96.2	96.4	96.3	1.7	1.6	1.7	1.7	2.0	2.1	2.1	2.1
					Bottom	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
SR2	1014-1023	2.6	E	0.1	Surface	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
					Middle	17.8	17.7	17.8	28.7	28.7	28.7	7.9	7.9	7.9	98.6	98.4	98.5	2.0	1.9	1.9	1.9	2.4	2.5	2.5	2.5
					Bottom	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
SR3	0822-0833	9.2	E	0.1	Surface	17.7	17.7	17.7	28.5	28.6	28.6	7.8	7.8	7.8	96.9	96.8	96.9	1.7	1.8	1.8	1.9	2.3	2.2	2.3	2.2
					Middle	17.6	17.7	17.7	28.7	28.6	28.7	7.7	7.7	7.7	96.1	95.9	96.0	1.9	1.8	1.9	1.9	2.1	2.0	2.1	2.1
					Bottom	17.5	17.4	17.5	28.8	28.8	28.8	7.6	7.7	7.7	94.9	95.4	95.2	1.9	2.0	1.9	1.9	2.2	2.1	2.2	2.2
SR4	1046-1057	7.9	E	0.2	Surface	17.6	17.5	17.6	28.7	28.6	28.7	7.9	7.9	7.9	98.5	98.8	98.7	1.1	1.0	1.1	1.2	1.3	1.2	1.3	1.5
					Middle	17.4	17.5	17.5	28.6	28.6	28.6	7.8	7.8	7.8	97.5	97.4	97.5	1.3	1.2	1.2	1.2	1.5	1.5	1.5	1.5
					Bottom	17.5	17.4	17.5	28.7	28.6	28.7	7.8	7.8	7.8	96.8	96.5	96.7	1.4	1.5	1.4	1.4	1.7	1.9	1.8	1.8
SR5	1029-1041	9.8	E	0.3	Surface	17.7	17.6	17.7	28.7	28.6	28.7	7.8	7.9	7.8	97.4	97.6	97.5	1.7	1.8	1.7	1.7	2.2	1.9	2.1	2.1
					Middle	17.6	17.5	17.6	28.8	28.8	28.8	7.8	7.8	7.8	97.0	96.5	96.8	1.7	1.6	1.7	1.7	2.0	2.0	2.0	2.1
					Bottom	17.3	17.4	17.4	28.9	28.8	28.9	7.7	7.7	7.7	95.7	95.4	95.6	1.8	1.8	1.8	1.8	2.2	2.2	2.2	2.2

Remark or Observation:

- \* Average; \*\* Depth Average
- Each station was sampled and measurements/ water samples were taken at three depths, namely, 1 m below water surface, mid-depth and 1 m above sea bed, except where the water depth less than 6 m, the mid-depth station may be omitted. For stations that are less than 3 m in depth, only the mid-depth sample was taken.

Date: 29-Mar-16  
Tide: Mid-Ebb  
Weather: Cloudy  
Sea Conditions: Small Wave

Location	Sampling Time	Water Depth (m)	Current direction	Current speed (ms <sup>-1</sup> )	Monitoring Depth	Temperature (°C)			Salinity (ppt)			DO (mg/l)			DO Saturation (%)			Turbidity (NTU)				Suspended Solids (mg/l)			
						1	2	Ave.*	1	2	Ave.*	1	2	Ave.*	1	2	Ave.*	1	2	Ave.*	D.A.**	1	2	Ave.*	D.A.**
C1	1416-1419	14.2	W	0.1	Surface	18.0	18.1	18.1	28.5	28.5	28.5	7.9	7.8	7.8	97.6	97.0	97.3	2.1	2.1	2.1	2.2	2.7	2.3	2.5	2.6
					Middle	18.0	18.0	18.0	28.5	28.5	28.5	7.8	7.8	7.8	96.6	96.2	96.4	2.2	2.1	2.1	2.2	2.6	2.5	2.6	2.6
					Bottom	17.9	17.9	17.9	28.5	28.5	28.5	7.7	7.7	7.7	90.4	94.9	92.7	2.3	2.3	2.3	2.3	2.7	2.5	2.6	2.6
C2	1550-1603	14.0	W	0.2	Surface	17.8	17.8	17.8	28.8	28.9	28.9	7.8	7.8	7.8	97.2	96.8	97.0	1.3	1.2	1.2	1.2	1.5	1.5	1.5	1.5
					Middle	17.8	17.8	17.8	28.8	28.8	28.8	7.8	7.8	7.8	96.2	96.0	96.1	1.2	1.2	1.2	1.2	1.4	1.4	1.4	1.5
					Bottom	17.8	17.8	17.8	28.7	28.7	28.7	7.7	7.7	7.7	96.0	95.7	95.9	1.3	1.3	1.3	1.3	1.5	1.7	1.6	1.6
G1	1434-1447	12.0	W	0.2	Surface	18.0	18.0	18.0	28.6	28.6	28.6	7.8	7.8	7.8	96.8	96.7	96.8	1.9	1.8	1.9	1.9	2.3	2.2	2.3	2.3
					Middle	18.0	18.0	18.0	28.6	28.6	28.6	7.8	7.8	7.8	96.1	96.3	96.2	1.8	1.9	1.8	1.9	2.0	2.4	2.2	2.2
					Bottom	17.9	17.9	17.9	28.6	28.6	28.6	7.7	7.7	7.7	95.7	95.5	95.6	1.9	1.8	1.9	1.9	2.3	2.0	2.2	2.2
G2	1508-1513	2.2	W	0.2	Surface	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
					Middle	17.9	17.9	17.9	28.7	28.7	28.7	7.9	8.0	8.0	98.3	98.8	98.6	1.9	1.9	1.9	1.9	2.2	2.2	2.2	2.2
					Bottom	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
G3	1454-1507	12.4	W	0.1	Surface	17.9	18.0	18.0	28.6	28.7	28.7	7.8	7.9	7.8	97.0	97.3	97.2	1.8	1.8	1.8	1.8	2.0	1.9	2.0	2.0
					Middle	17.9	18.0	18.0	28.6	28.5	28.6	7.8	7.8	7.8	96.6	97.0	96.8	1.8	1.8	1.8	1.8	2.4	2.4	2.4	2.2
					Bottom	18.0	18.0	18.0	28.6	28.6	28.6	7.8	7.8	7.8	96.2	96.3	96.3	1.9	1.8	1.8	1.8	2.0	2.2	2.1	2.1
SR1	1448-1453	2.6	W	0.2	Surface	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
					Middle	18.0	18.0	18.0	28.6	28.6	28.6	7.7	7.7	7.7	96.0	95.5	95.8	1.7	1.8	1.7	1.7	1.9	2.1	2.0	2.0
					Bottom	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
SR2	1514-1519	2.4	W	0.2	Surface	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
					Middle	17.8	17.9	17.9	28.7	28.8	28.8	7.9	7.9	7.9	97.8	97.5	97.7	1.8	1.9	1.8	1.8	2.2	2.0	2.1	2.1
					Bottom	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
SR3	1420-1433	9.0	W	0.1	Surface	18.0	18.0	18.0	28.5	28.6	28.6	7.7	7.8	7.8	96.0	96.3	96.2	1.8	1.9	1.8	1.9	2.2	2.1	2.2	2.2
					Middle	17.9	18.0	18.0	28.5	28.5	28.5	7.7	7.7	7.7	95.7	95.5	95.6	1.8	1.9	1.9	1.9	2.2	2.1	2.2	2.2
					Bottom	17.9	17.9	17.9	28.6	28.5	28.6	7.7	7.7	7.7	95.6	95.2	95.4	1.9	1.9	1.9	1.9	2.2	2.4	2.3	2.3
SR4	1535-1549	7.6	W	0.2	Surface	17.9	17.8	17.9	28.8	28.7	28.8	7.9	7.9	7.9	98.1	97.6	97.9	1.1	1.1	1.1	1.2	1.3	1.3	1.3	1.4
					Middle	17.9	17.9	17.9	28.8	28.8	28.8	7.9	7.9	7.9	98.0	97.5	97.8	1.3	1.2	1.2	1.2	1.4	1.5	1.5	1.5
					Bottom	17.9	17.9	17.9	28.7	28.8	28.8	7.8	7.9	7.8	96.9	97.5	97.2	1.2	1.2	1.2	1.2	1.6	1.5	1.6	1.6
SR5	1520-1534	9.6	W	0.1	Surface	17.8	17.9	17.9	28.8	28.7	28.8	7.8	7.8	7.8	96.7	96.2	96.5	1.9	2.0	1.9	1.8	2.1	2.6	2.4	2.1
					Middle	17.9	17.9	17.9	28.7	28.7	28.7	7.8	7.8	7.8	96.8	96.6	96.7	1.6	1.7	1.6	1.8	2.0	1.8	1.9	2.1
					Bottom	17.9	17.9	17.9	28.8	28.8	28.8	7.7	7.8	7.7	95.7	96.2	96.0	1.8	1.8	1.8	1.8	2.0	2.3	2.2	2.2

Remark or Observation:

1. \* Average; \*\* Depth Average

2. Each station was sampled and measurements/ water samples were taken at three depths, namely, 1 m below water surface, mid-depth and 1 m above sea bed, except where the water depth less than 6 m, the mid-depth station may be omitted. For stations that are less than 3 m in depth, only the mid-depth sample was taken.

**ERM has over 140 offices  
Across the following  
countries worldwide**

Argentina	New Zealand
Australia	Panama
Belgium	Peru
Brazil	Poland
Canada	Portugal
China	Puerto Rico
Colombia	Romania
France	Russia
Germany	Singapore
Hong Kong	South Africa
Hungary	Spain
India	Sweden
Indonesia	Taiwan
Ireland	Thailand
Italy	The Netherlands
Japan	United Arab Emirates
Kazakhstan	United Kingdom
Korea	United States
Malaysia	Vietnam
Mexico	


**Environmental Resources Management**

**16/F Berkshire House  
25 Westlands Road  
Quarry Bay, Hong Kong**

**T: 2271 3000**

**F: 2723 5660**

**[www.erm.com](http://www.erm.com)**



**ERM**