


0.5M 1.6M FOOTWAY 1.25M VERGE 7.3M CARRIAGEWAY



PLAIN NOISE BARRIER

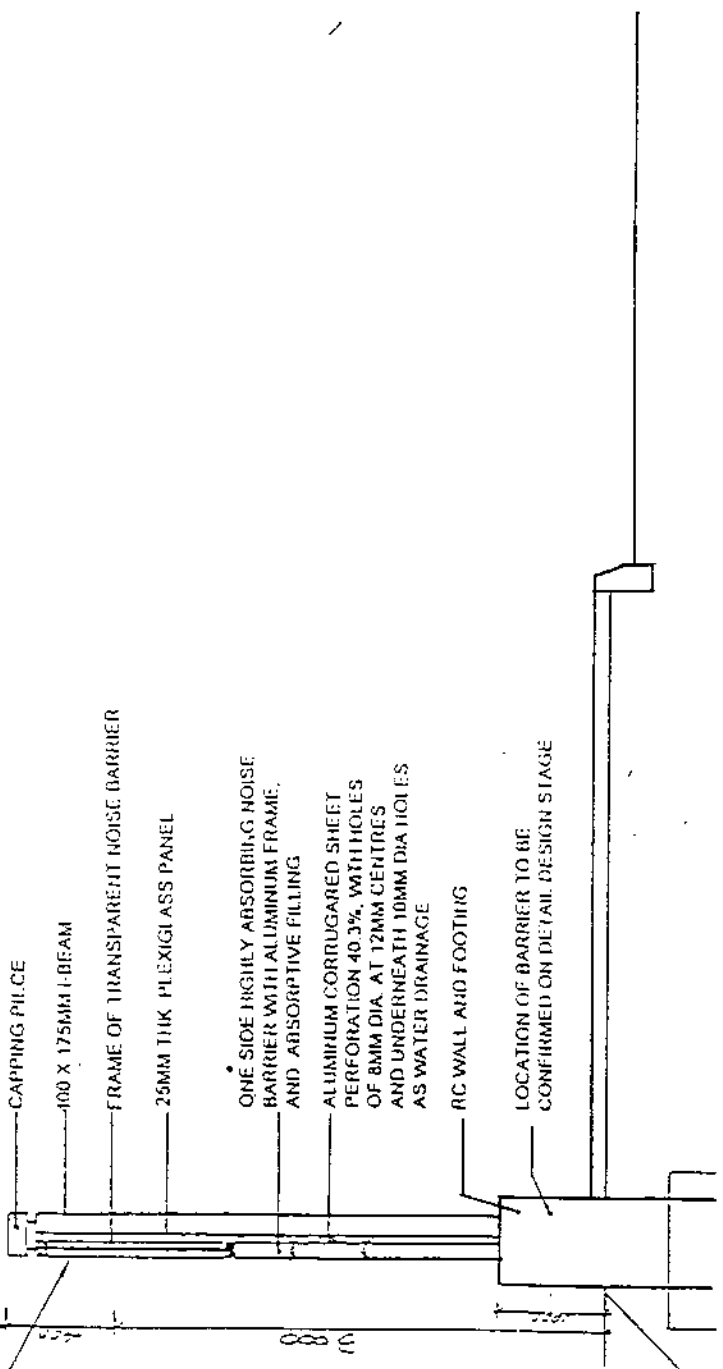

CAPPING PILCE

100 X 175MM I-BEAM

FRAME OF TRANSPARENT NOISE BARRIER

25MM THK PLEXIGLASS PANEL

ONE SIDE HIGHLY ABSORBING NOISE BARRIER WITH ALUMINIUM FRAME, AND ABSORPTIVE FILLING

ALUMINIUM CORRUGATED SHEET PERFORATION 40.3%, WITH HOLES OF 8MM DIA. AT 12MM CENTRES AND UNDERNEATH 10MM DIA HOLES AS WATER DRAINAGE

RC WALL AND FOOTING

LOCATION OF BARRIER TO BE CONFIRMED ON DETAIL DESIGN STAGE

N.T.S.

CONCEPTUAL SECTION OF NOISE BARRIER

(extracted from the EIA Report)

Figure 2.10

Babtle BMT (Hong Kong) Ltd.
Consulting Engineers