


Typical Noise Enclosure for Static Plant (e.g. Air Compressors, Generators etc.)
~3-4m wall

Minimum surface density of 14 kg/m²

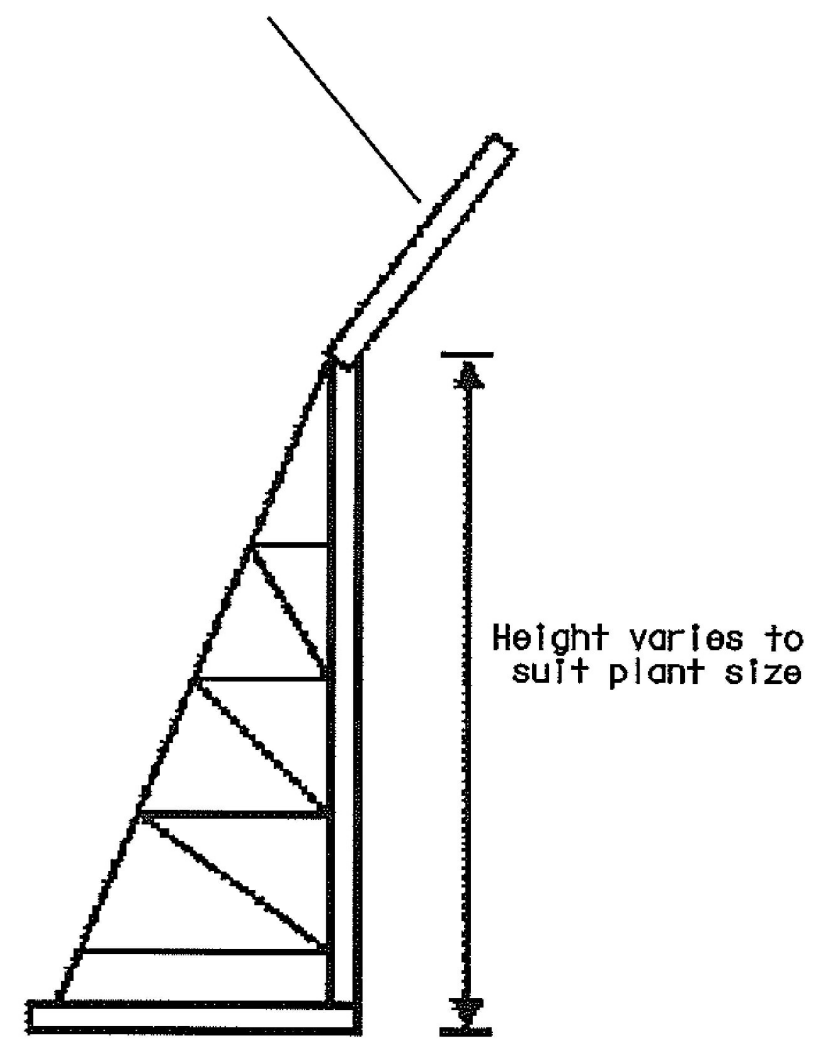

Typical Section of Temporary Movable Noise Barrier
(3-5m tall)

\$TIME\$
 \$DATE\$
 \$USER\$
 PRINTED BY:
 \$FILENAME\$
 \$MODELNAME\$
 \$PLOTDRIVE\$

DRAWN		LK			SHATIN TO CENTRAL LINK		TITLE		NEX 2206 - TAW TO HUH SECTION			
DESIGNED		LK			ORIGINATOR		Sketch of Typical Temporary		Noise Barrier / Enclosure			
CHECKED		SC			ARUP		Ove Arup & Partners		SCALE		DRAWING NO.	
APPROVED		FC			Hong Kong Limited		N.T.S.		A8.3		REV.	
DATE		Apr/10			NEX2206_C_SCL_OAP_ENV_004B		A					
<small>DO NOT SCALE DRAWINGS. ALL DIMENSIONS SHALL BE VERIFIED ON SITE. © MTR CORPORATION LIMITED 2008. COPYRIGHT IN RESPECT OF THIS DRAWING / DOCUMENT IS OWNED BY THE MTR CORPORATION LIMITED OF HONG KONG. NO REPRODUCTION OF THE DRAWING / DOCUMENT OR ANY PART BY WHATEVER MEANS IS PERMITTED WITHOUT THE PRIOR WRITTEN CONSENT OF THE MTR CORPORATION LIMITED.</small>												
REV	DESCRIPTION	BY	DATE	APPROVED	REV	DESCRIPTION	BY	DATE	APPROVED			
A	FIRST ISSUE	LK	04/10	FC								