



STATION	1	2	3	4	5	6	7	8	9	10
BASE SLAB TOP LEVEL (FSL)	+11.500	+11.500	+11.500	+11.500	+11.500	+11.500	+11.500	+11.500	+11.500	+11.500
BASE SLAB THICKNESS (MM)	300	300	300	300	300	300	300	300	300	300
RETAINING HEIGHT (MM)	6-7	6-7	6-7	6-7	6-7	6-7	6-7	6-7	6-7	5-6

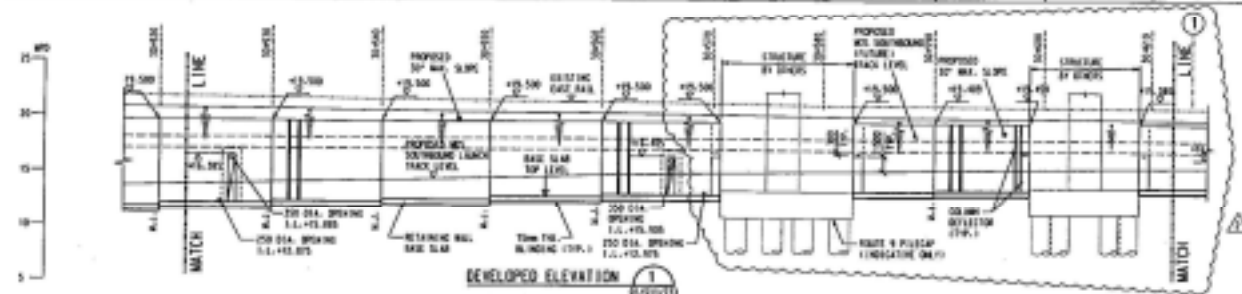

STATION	10	11	12	13	14	15	16
BASE SLAB TOP LEVEL (FSL)	+11.500	+11.500	+11.500	+11.500	+11.500	+11.500	+11.500
BASE SLAB THICKNESS (MM)	300	300	300	300	300	300	300
RETAINING HEIGHT (MM)	5-6	5-6	5-6	5-6	5-6	4-5	4-5

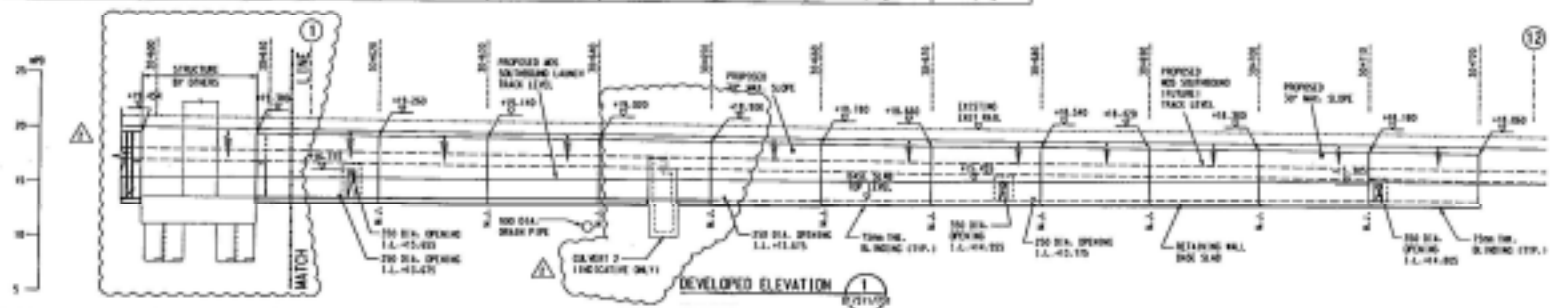

STATION	17	18	19	20	21	22	23	24	25	26	27
BASE SLAB TOP LEVEL (FSL)	+11.500	+11.500	+11.500	+11.500	+11.500	+11.500	+11.500	+11.500	+11.500	+11.500	+11.500
BASE SLAB THICKNESS (MM)	300	300	300	300	300	300	300	300	300	300	300
RETAINING HEIGHT (MM)	4-5	4-5	4-5	5-6	5-6	3-4	3-4	3-4	2-4	2-4	<3

Figure 19 Retaining Wall RW3A
(Extracted from the Application VEP-157/2004)

Environmental Permit No:
FEP-04/039/2000/F