香港電燈有限公司 The Hongkong Electric Co., Ltd.



Improvement Dredging for Lamma Power Station Navigation Channel Quarterly Environmental Monitoring & Audit Report

February – April 2021



ENVIRONMENTAL IMPACT ASSESSMENT (EIA) ORDINANCE, CAP. 499

ENVIRONMENTAL PERMIT NO. EP-535/2017

IMPROVEMENT DREDGING FOR LAMMA POWER STATION NAVIGATION CHANNEL

Report Title	Quarterly EM&A Summary Report (February 2021 to April 2021)
Date	11 June 2021
Certified by	
Verified by	(Mr. Kenneth Fung, Environmental Team Leader) Mr. Y T Tang (AECOM Asia Company Limited, Independent Environmental Checker)

TABLE OF CONTENT

EXECUTIVE SUMMARY

1.	INTRODUCTION	3
1.1	Background	3
1.2	Project Organisation	3
1.3	Construction Works undertaken during the Reporting Period	3
1.4	Summary of EM&A Requirements	5
2.	WATER QUALITY MONITORING	8
3.	ENVIRONMENTAL AUDIT	9
3.1	Review of Environmental Monitoring Procedures	9
3.2	Assessment of Environmental Monitoring Results	9
3.3	Site Environmental Audit	10
3.4	Status of Environmental Licensing and Permitting	10
3.5	Implementation Status of Environmental Mitigation Measures	11
3.6	Implementation Status of Alert/Event and Action Plans	11
3.7	Implementation Status of Environmental Complaint Handling Procedures	11
3.8	Environmental Summon and Successful Prosecution	11
4.	CONCLUSION	12

LIST OF TABLES

Table 1.1	Construction Activities and Their Corresponding Environmental Mitigation Measures
Table 3.1	Summary of Alert, Action and Limit Level Exceedances on Monitoring Parameters
Table 3.2	Estimated Amounts of Waste Generated
Table 3.2	Summary of Environmental Licensing and Permit Status
Table 3.4	Environmental Complaints Received
Table 3.5	Outstanding Environmental Complaints Carried Over
LIST OF FI	GURE
Figure 1.1	Project Area
Figure 1.2	Location of Dumping Area (South Cheung Chau Open Sea Sediment Disposal Area)
ANNEX	
Annex A	Organisation Chart
Annex B	Amount of Dredged and Dumped Marine Sediment
Annex C	Water Quality Monitoring Results
Annex D	Alert/Event and Action Plans
Annex E	Site Audit Summary
Annex F	Summary of EMIS

EXECUTIVE SUMMARY

The actual dredging work for the "Improvement Dredging for Lamma Power Station Navigation Channel" (the Project) commenced on 18 February 2020. This is the 5th quarterly Environmental Monitoring and Audit (EM&A) Summary report for the Project prepared by the Environmental Team (ET). This report presents the results of impact monitoring for the said project in the period from February 2021 to April 2021.

Marine water quality monitoring was performed. The results were checked against the established Alert, Action and Limit levels. The implementation status of the environmental mitigation measures, Alert/Event and Action Plans and environmental complaint handling procedures were also checked.

Construction Activities Undertaken

The major construction activities during the reporting period were dredging and dumping of dredged mud. Two grab dredgers were deployed and operated within the Project Area. Uncontaminated materials were dumped at the designated location within the South Cheung Chau Open Sea Sediment Disposal Area. The maximum hourly and daily dredging rates actually achieved by the contractors were within the limits specified in the latest dredging schedule.

Environmental Monitoring Works

All monitoring work at designated stations was performed as scheduled in the reporting period.

Water Quality

The water quality monitoring results for Dissolved Oxygen (DO), Turbidity and Suspended Solid (SS) obtained during the reporting period were within their corresponding Action Levels, Limit Levels and Alert Levels.

Site Environmental Audit

Site audits were carried out by ET on a weekly basis to monitor environmental issues at the construction sites to ensure that all mitigation measures were implemented timely and properly. Three site audits were performed in the reporting period. As no dredging work was carried out from 1 February 2021 to 16 April 2021, no site audit was arranged during this period.

Independent Environmental Checker (IEC) conducted a site inspection on 26 February 2021, 26 March 2021 and 30 April 2021 to audit the water quality monitoring works/ site works. The site conditions were generally satisfactory. The site audit findings for the reporting period are summarized in Annex E.

Environmental Licensing and Permitting

Description	Permit No.	Valid Period		Issued To	Date of Issuance
		From	To		
Environmental Permit	EP-535/2017	10/10/2017	-	HK Electric	10/10/2017
Construction Noise Permit	GW-RS0486-20	07/08/2020	06/02/2021	Contractor	17/07/2020
Marine Dumping Permit	EP/MD/21-117	08/04/2021	30/09/2021	Contractor	07/04/2021

Implementation Status of Environmental Mitigation Measures

Environmental mitigation measures for the construction activities as recommended in the EM&A manual were implemented in the reporting period.

Environmental Complaints

No complaint against the Project was received in the reporting period.

Environmental Summon and Successful Prosecution

No notifications of summon or successful prosecution was received in the reporting period.

Concluding Remarks

The environmental performance of the project during the reporting period was generally satisfactory.

1. INTRODUCTION

1.1 Background

The Environmental Team (hereinafter called the "ET") was formed within the Hongkong Electric Co. Ltd (HK Electric) to undertake Environmental Monitoring and Audit for "Improvement Dredging for Lamma Power Station Navigation Channel" (hereinafter called the "Project"). Under the requirements of Section 3 of Environmental Permit EP-535/2017, an EM&A programme for impact environmental monitoring is required to be implemented. In accordance with the EM&A Manual, environmental monitoring of water quality and regular environmental audits are required for the Project.

The Project involves re-profiling the Lamma Power Station Navigation Channel (the "Channel") to a target depth of -16.5 mPD with an estimated sediment quantity up to approx. 3.2 million m³, subject to fine-tuning against the actual existing seabed profile. The Project Area is shown in Figure 1.1.

The majority of dredging work is to be carried out by Trailer Suction Hopper Dredger (TSHD) whereas the minority of dredging work for remedial trimming and near the existing jetty structure is to be carried out by grab dredger. The construction works of the Project was commenced in February 2020.

This report summarizes the environmental monitoring and audit work for the Project for the period from February 2021 to April 2021.

1.2 Project Organisation

The management structure to oversee the Project includes the following:

- Project Proponent (HK Electric);
- Environmental Protection Department (EPD);
- Engineer or Engineer's Representative (ER);
- Independent Environmental Checker (IEC);
- Environmental Team (ET); and
- Contractor.

The project organisation chart and environmental team organisation chart for the construction EM&A programme are shown in Annex A.

1.3 Construction Works undertaken during the Reporting Period

Construction activities undertaken during the reporting report for this Project were dredging and dumping of dredged mud. Two grab dredgers were deployed and operated within the Project Area. The total volume of dredged materials from 1 February to 30 April 2021 was 1,800 m³. Dredging work was suspended from 1 February to 16 April 2021 in the reporting period. Uncontaminated materials were dumped at the designated location within the South Cheung Chau Open Sea Sediment Disposal Area and the total dumped volume in reporting period was 1,800 m³. The location of dumping site is shown in Figure 1.2 and Figure 1.3.

Daily records of dredged / dumped volume are presented in Annex B. The maximum hourly and daily dredging rates achieved by the contractors were within the limits specified in the latest dredging schedule.

The main construction activities carried out during the reporting period and the corresponding environmental mitigation measures are summarized in Table 1.1. The implementation of major mitigation measures in the period is provided in Annex F.

Table 1.1 Construction Activities and Their Corresponding Environmental Mitigation Measures

Measures				
Construction Activities	Environmental Mitigation Measures			
Dredging	Water Quality There was no concurrent or mixed use of grab dredger and TSHD operation. Closed grab capacity was not less than 8m³ (except for dredging works near submarine pipeline). Cage-type silt curtain (at least 10m depth) was used for grab dredger operation. No operation of more than 5 grab dredgers concurrently at any time was allowed. Both maximum total hourly and daily dredging rates as specified in the latest dredging schedule were strictly followed. Vessel speeds within the Project Area were reduced to maximum speed limit. Neither overflow nor using of lean mixture overboard (LMOB) system was occurred. All barges for transportation of dredged materials were fitted with tight bottom seals to prevent leakage. Marine Ecology No dredging on Zone 4 of the navigation channel during the calving season for the Finless Porpoise. All construction related vessels travelled to and from the Project Area followed the designated route to avoid the Finless Porpoise habitat area. The dumping of chemicals, rubbish, oils etc. into the water was strictly prohibited. Hazard to Life Marine vessels should avoid traveling during berthing and unberthing of coal vessel. As far as practicable, marine vessels should avoid traveling after sunset or under low visibility when the works area is near submarine pipeline. Working vessel not to stay right above the submarine pipeline			
	unless it is necessary.			

Construction Activities	Environmental Mitigation Measures			
	Noise - General noise mitigation measures were employed at work site throughout the construction phase. - The number and type of plants and operation conditions as specified in the CNP were strictly followed.			
	Waste Management			
	 All barges for transportation of dredged materials were fitted with tight bottom seals to prevent leakage. All vessels were filled to a level such that dredged materials would not spill over during loading and transportation. Dredged wastes were disposed of at Licensed dumping site. Records of the quantities of waste generated and disposed of off-site were taken. 			

1.4 Summary of EM&A Requirements

The EM&A program requires environmental monitoring of water quality. The detailed EM&A monitoring work for water quality is described in Sections 2 of this report.

The following environmental audits are summarized in Section 3 of the report:

- Environmental monitoring results;
- Waste Management Records;
- Weekly site audit results;
- The status of environmental licensing and permits for the Project;
- The implementation status of environmental protection and pollution control/ mitigation measures.

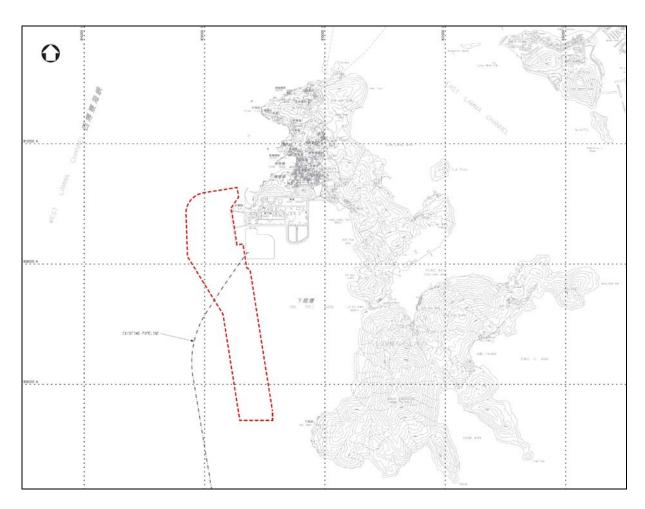


Figure 1.1 Project Area

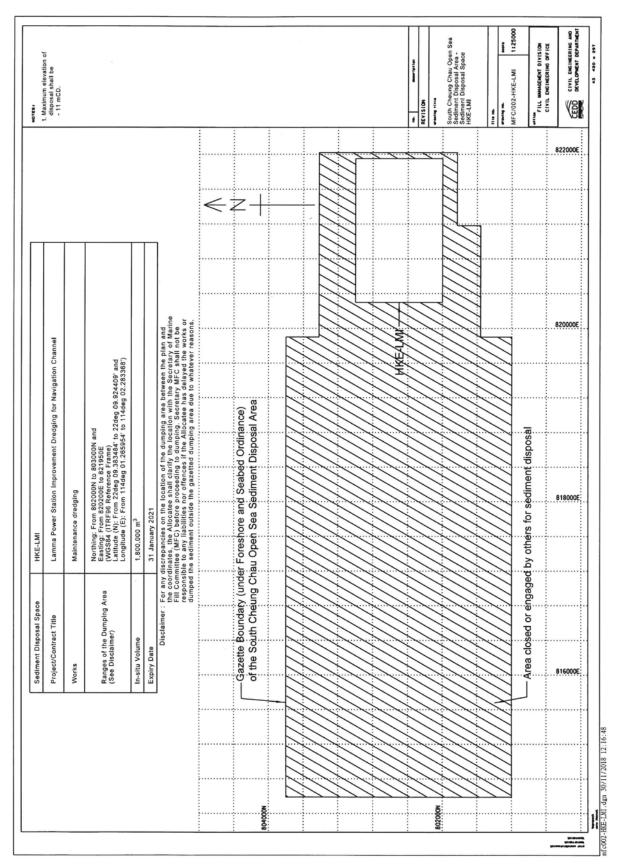


Figure 1.2 Location of Dumping Site (South Cheung Chau Open Sea Sediment Disposal Area)

2. WATER QUALITY MONITORING

Marine water quality monitoring was carried out during the marine works to detect and check for any deterioration in water quality and ensure that timely action is taken to rectify deteriorations that are due to the Project.

HK Electric commissioned Mott MacDonald Hong Kong Limited to carry out water quality monitoring works of the Project. Details of the water quality monitoring results and the associated alert/event and action plans presented in the Quarterly Water Quality Monitoring Report are shown in Annex C.

3. ENVIRONMENTAL AUDIT

3.1 Review of Environmental Monitoring Procedures

The environmental monitoring procedures were regularly reviewed by the Environmental Team. No modification to the existing monitoring procedures was recommended.

3.2 Assessment of Environmental Monitoring Results

Monitoring results for Water Quality

Table 3.1 Summary of Alert, Action and Limit Level Exceedances on Monitoring Parameters

Item	Parameter Monitored	Monitoring Period	No. of Exceedances		es	Alert/Event and Action Plans Implementation
			Alert Level	Action Level	Limit Level	Status and Results
Water						
1	DO (Surface & Middle)	01/02/2021 30/04/2021	0	0	0	N.A.
2	DO (Bottom)	01/02/2021 30/04/2021	0	0	0	
3	Turbidity	01/02/2021 30/04/2021	0	0	0	
4	SS	01/02/2021 30/04/2021	N.A.	0	0	

Waste Management

The estimated amounts of waste generated in reporting period are shown in Table 3.2.

Table 3.2 Estimated Amounts of Waste Generated

Period	Waste Type	Estimated Amount (m ³)
February 2021	Dredged Materials – Marine Mud	0
March 2021	Dredged Materials – Marine Mud	0
April 2021	Dredged Materials – Marine Mud	1,800

The total bulk volume of dredged material was 1,800 m³.

3.3 Site Environmental Audit

Site audits were carried out by ET on a weekly basis to monitor environmental issues at the construction sites to ensure that all mitigation measures were implemented timely and properly. Three site audits were performed in the reporting period. As no dredging work was carried out from 1 February 2021 to 16 April 2021, no site audit was arranged during this period.

Independent Environmental Checker (IEC) conducted a site inspection on 26 February 2021, 26 March 2021 and 30 April 2021 to audit the water quality monitoring and/or site works. The site conditions were generally satisfactory. The site audit findings for the reporting period are summarized in Annex E.

3.4 Status of Environmental Licensing and Permitting

All permits/licenses obtained for the project are summarised in Table 3.3.

Table 3.3 Summary of Environmental Licensing and Permit Status

Description	Permit	Valid Period		Highlights	Status
	No.	From	To		
Environmental	EP-	10/10/2017	-	The whole	Valid
Permit	535/2017			construction work	
				site	
Construction	GW-	07/08/2020	06/02/2021	Operation of PME	Valid
Noise Permit	RS0486-			during the	(up to
	20			restricted hours	06/02/2021)
				(00:00-24:00	
				hours on general	
				holidays, and	
				00:00-07:00 and	
				19:00-2400 hours	
				on any day not	
				being a general	
				holiday)	

Description	Permit	Valid Period		Highlights	Status
	No.	From	To		
Marine	EP/MD/	08/04/2021	30/09/2021	Dumping at South	Valid
Dumping	21-117			Cheung Chau	
Permit				Open Sea	
				Sediment Disposal	
				Area	

3.5 Implementation Status of Environmental Mitigation Measures

Mitigation measures detailed in the permits and the EM&A Manual are required to be implemented. An updated summary of the Environmental Mitigation Implementation Schedule (EMIS) is presented in Annex F.

3.6 Implementation Status of Alert/Event and Action Plans

The Alert/Event and Action Plans for water quality extracted from the EM&A Manual are presented in Annex D.

3.7 Implementation Status of Environmental Complaint Handling Procedures

During the reporting period, there was no environmental complaint against the Project was received.

Table 3.4 Environmental Complaints Received

Case Reference / Date, Time Received / Date, Time Concerned	Descriptions / Actions Taken	Conclusion / Status
Nil	N/A	N/A

Table 3.5 Outstanding Environmental Complaints Carried Over

Case Reference / Date, Time Received / Date, Time Concerned	Descriptions / Actions Taken	Conclusion / Status
Nil	N/A	N/A

3.8 Environmental Summon and Successful Prosecution

No notifications of summon or successful prosecution was received in the reporting period.

4. CONCLUSION


Environmental monitoring was performed as required in the reporting period. The water quality monitoring results for Dissolved Oxygen (DO), Turbidity and Suspended Solid (SS) obtained during the reporting period were within their corresponding Action Levels, Limit Levels and Alert Levels.

Environmental mitigation measures recommended in the EM&A manual for the Project were implemented in the reporting period. No compliant against the Project was received. No prosecution and summons was received for this Project in the reporting period.

The environmental performance of the Project was generally satisfactory.

Annex A Organization Chart

A1: Project Organisation Chart

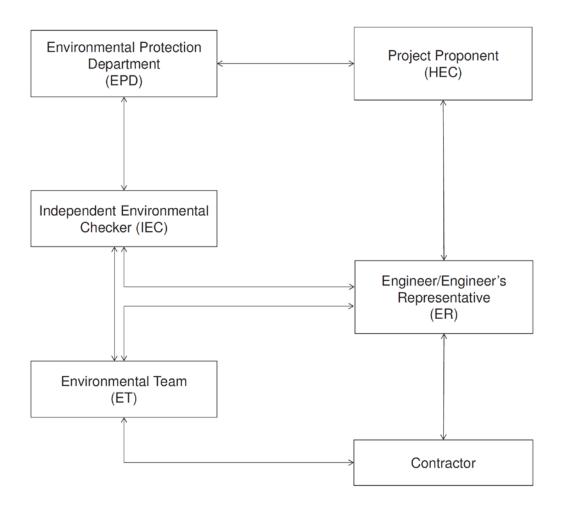

A2: Environmental Team Organisation Chart



Improvement Dredging for Lamma Power Station Navigation Channel (EP-535/2017)

Environmental Team Organization Chart



Annex B Amount of Dredged and Dumped Marine Sediment

Date	Dredging Time	Dredged Marine Mud	Dumping Time	Dumped Marine Mud	
Buie	Breaging Time	(bulk volume m ³)	Dumping Time	(bulk volume m ³)	
01/02/2021	-	-	-	-	
02/02/2021	-	-	-	-	
03/02/2021	-	-	-	-	
04/02/2021	-	-	-	-	
05/02/2021	-	-	-	-	
06/02/2021	-	-	-	-	
07/02/2021	-	-	-	-	
08/02/2021	-	-	-	-	
09/02/2021	-	-	-	-	
10/02/2021	-	-	-	-	
11/02/2021	-	-	-	-	
12/02/2021	-	-	-	-	
13/02/2021	-	-	-	-	
14/02/2021	-	-	-	-	
15/02/2021	-	-	-	-	
16/02/2021	-	-	-	-	
17/02/2021	-	-	-	-	
18/02/2021	-	-	-	-	
19/02/2021	-	-	-	-	
20/02/2021	-	-	-	-	
21/02/2021	-	-	-	-	
22/02/2021	-	-	-	-	
23/02/2021	-	-	-	-	
24/02/2021	-	-	-	-	
25/02/2021	-	-	-	-	
26/02/2021	-	-	_	_	
27/02/2021	-	-	_	_	
28/02/2021	-	-	-	-	
Total in the		0		0	
Month				, v	
Accumulated		4,500,300		4,500,300	
Total		, ,			

Date	Dredging Time	Dredged Marine Mud (bulk volume m³)	Dumping Time	Dumped Marine Mud (bulk volume m³)
01/03/2021	-	-	-	-
02/03/2021	-	-	-	-
03/03/2021	-	-	-	-
04/03/2021	-	-	-	-
05/03/2021	-	-	-	-
06/03/2021	-	-	-	-
07/03/2021	-	-	-	-
08/03/2021	-	-	-	-
09/03/2021	-	-	-	-
10/03/2021	-	-	-	-
11/03/2021	-	-	-	-
12/03/2021	-	-	-	-
13/03/2021	-	-	-	-
14/03/2021	-	-	-	-
15/03/2021	-	-	-	-
16/03/2021	-	-	-	-
17/03/2021	-	-	-	-
18/03/2021	-	-	-	-
19/03/2021	-	-	-	-
20/03/2021	-	-	-	-
21/03/2021	-	-	-	-
22/03/2021	-	-	-	-
23/03/2021	-	-	-	-
24/03/2021	-	-	-	-
25/03/2021	-	-	-	-
26/03/2021	-	-	-	-
27/03/2021	-	-	-	-
28/03/2021	-	-	-	-
29/03/2021	-	-	-	-
30/03/2021	-	-	-	_
31/03/2021	-	-	-	_
Total in the		0		0
Month				
Accumulated Total		4,500,300		4,500,300

Date	Dredging Time	Dredged Marine Mud (bulk volume m³)	Dumping Time	Dumped Marine Mud (bulk volume m³)	
01/04/2021	-	-			
02/04/2021	-	-	-	-	
03/04/2021	-	-	-	-	
04/04/2021	-	-	-	-	
05/04/2021	-	-	-	-	
06/04/2021	-	-	-	-	
07/04/2021	-	-	-	-	
08/04/2021	-	-	-	-	
09/04/2021	-	-	-	-	
10/04/2021	-	-	-	-	
11/04/2021	-	-	-	-	
12/04/2021	-	-	-	-	
13/04/2021	-	-	-	-	
14/04/2021	-	-	-	-	
15/04/2021	-	-	-	-	
16/04/2021	-	-			
17/04/2021	00:00 - 23:59	00:00 – 23:59 600		600	
18/04/2021	-	-	-	-	
19/04/2021	-	-	-	-	
20/04/2021	-	-	-	-	
21/04/2021	00:00 - 23:59	600	00:00 - 23:59	600	
22/04/2021	00:00 - 23:59	600	00:00 - 23:59	600	
23/04/2021	-	-	-	-	
24/04/2021	-	-	-	1	
25/04/2021	-	-	ı	-	
26/04/2021	-	-	-	-	
27/04/2021	-	-	-	-	
28/04/2021	-	-	-	-	
29/04/2021	-	-	-	-	
30/04/2021	-	-	-	-	
Total in the Month		1,800		1,800	
Accumulated Total		4,502,100		4,502,100	

Note:-

As the bulking factor (i.e. bulking factor of 4 for TSHD & 1.3 for Hopper Barge in accordance with assumptions in the approved dumping permit by EPD) of dredged marine mud is found varying considerably at different locations in the navigation channel depending on the depth of high spots to be removed, the final in-situ as-dredged volume will be determined by swath surveys of the navigation channel before and after the dredging work.

Following the interim survey carried out from 13 to 16 March 2020, the bulking factor for TSHD has been adjusted from 4 to 2.8 as directed by EPD. Subsequent planning and control of dredging rates for coming works would be based on the adjusted bulking factor.

Annex C

Water Quality Monitoring Results



Improvement Dredging for Lamma Power Station Navigation Channel

Construction Phase Quarterly Water Quality Monitoring Report No. 5 (February – April 2021) May 2021 Mott MacDonald 3/F International Trade Tower 348 Kwun Tong Road Kwun Tong Kowloon Hong Kong

T +852 2828 5757 mottmac.hk

The Hongkong Electric Company Limited

Improvement Dredging for Lamma Power Station Navigation Channel

Construction Phase Quarterly Water Quality Monitoring Report No. 5 (February – April 2021)

May 2021

Contents

Exe	cutive	e summary	1		
1	Introduction				
2	Mon	itoring Methodology	3		
	2.1 2.2	Monitoring Frequency and Locations Monitoring Parameters	3 4		
3	Wat	er Quality Performance Limits	5		
	3.1 3.2 3.3	Action and Limit Levels Alert Levels Review of Alert Levels	5 6 6		
4	Mon	itoring Results	7		
5	Con	clusion	8		
App	endix		9		
A.	Gra	ohical Presentations of Water Quality Monitoring Results	10		
Tab	les				
		ocations of Water Quality Monitoring Stations	3		
		Calculated Action and Limit Levels	5 6		
Tabl	Table 3.2: Calculated Initial Alert Levels				

Figures

Figure 2.1: Water Quality Monitoring Locations

1

Executive summary

The Project "Improvement Dredging for Lamma Power Station Navigation Channel" commenced on 18 February 2020. This is the fifth quarterly Water Quality Monitoring report for the Project. This report presents the results of impact monitoring on marine water quality for the Project from February to April 2021.

During this reporting period, a total of 39 days of marine water quality monitoring was carried out. The water quality monitoring results for all parameters (dissolved oxygen (DO), turbidity and suspended solids (SS)) obtained during the reporting period were within the corresponding Action and Limit Levels for sensitive receiver stations and within the Alert Levels for near stations as stipulated in the EM&A programme.

1 Introduction

On 10 October 2017, the Environment Impact Assessment (EIA) Report (Register No.: AEIAR-212/2017) for the "Improvement Dredging for Lamma Power Station Navigation Channel" (the Project) was approved and an Environmental Permit (EP) (No. EP-535/2017) was issued for the construction and operation of the Project. Mott MacDonald Hong Kong Limited was commissioned by The Hongkong Electric Company, Limited to carry out the water quality monitoring works of the Project during the construction phase.

The purpose of the Project is to provide and maintain safe clearance for ocean-going marine vessels delivering coal to Lamma Power Station (LPS) via the Lamma Power Station Navigation Channel (the "Channel"), through the dredging of naturally accumulating sediment from the seabed. In order to meet the requirements for continued safe passage, the construction phase of the Project involves improvement dredging of the Channel to a target dredge depth¹ of -16.5 mPD.

The construction phase of the Project commenced on 18 February 2020. This Water Quality Monitoring Report summarizes the water quality monitoring as part of the EM&A programme for the Project for the months of February, March and April 2021.

¹ While the Project aims to dredge to a target depth of -16.5 mPD, some overdredge may occur due to the limited precision control of dredging depths in practice.

2 Monitoring Methodology

2.1 Monitoring Frequency and Locations

The water quality monitoring was conducted three days per week during the reporting period at mid-flood and mid-ebb tides. In February 2021, the monitoring was conducted at a total of 16 water quality monitoring stations, comprising eight SR stations, five near stations and three control stations. In March and April 2021, the monitoring was conducted at 18 water quality monitoring stations, with the addition of SR2 and SR3 (as specified in the Updated EM&A Manual, SR2 and SR3 should be monitored between March and October). Details of the monitoring locations are shown in **Figure 2.1** and **Table 2.2**. It should be noted that the location of SR8 provided in **Table 2.2** is approximate due to changing location of fish rafts under different tidal and wind condition. Water quality monitoring at SR8 was conducted at the nearest safely accessible location to the Fish Culture Zone.

Table 2.1: Locations of Water Quality Monitoring Stations

ID	Station	Easting	Northing	Remarks
SR1	HK Electric Power Station Intake	829194	808600	Monitored for SS only
SR2	Hung Shing Yeh Beach	830200	808700	Monitored during bathing season only (March to October inclusive)
SR3	Lo So Shing Beach	830450	807300	Monitored during bathing season only (March to October inclusive)
SR4	Marine Ecological Habitat at Pak Kok	829600	811630	
SR5	Marine Ecological Habitat at Shek Kok Tsui	828560	811100	
SR6	Marine Ecological Habitat at Ha Mei Wan	829760	805520	
SR7	Marine Ecological Habitat at Southwest of Lamma	829590	804520	
SR8	Fish Culture Zone at Lo Tik Wan	831265	809115	
SR9	Fish Culture Zone at Sok Kwu Wan	831600	807765	
SR10	Fish Culture Zone at Cheung Sha Wan	819160	810780	
A1	Near station for Zone 1	828543	809573	For monitoring potential impacts to SR5 and SR4 during flood tide
A2	Near station for Zone 2	829053	807945	For monitoring potential impacts to SR1 and SR2 during flood tide
А3	Near station for Zone 3	829187	807100	For monitoring potential impacts to SR3 during both flood and ebb tide
A4	Near station for Zone 4 (east)	829427	805520	For monitoring potential impacts to SR6 during ebb tide
A5	Near station for Zone 4 (south)	829267	805134	For monitoring potential impacts to SR7 during ebb tide
C1	Control Station 1	828000	813500	

_	ID	Station	Easting	Northing	Remarks
	C2	Control Station 2	825000	808000	
	C3	Control Station 3	829000	802000	

2.2 Monitoring Parameters

For the ten SR stations (SR1 to SR10) and three control stations (C1 to C3), monitoring of DO, DO%, pH, temperature, turbidity, salinity, water depth and SS were undertaken. For monitoring of the five near stations (A1 to A5), only the in-situ parameters (DO, DO%, pH, temperature, turbidity, salinity and water depth) were recorded. Other relevant data were also recorded, including monitoring location, time, tidal stage, weather condition and sea condition.

3 Water Quality Performance Limits

3.1 Action and Limit Levels

The Action and Limit levels are summarized in Table 3.1.

Table 3.1: Calculated Action and Limit Levels

Parameters	Action Level		Limit Level		
SR1					
SS in mg/L	90 100		00		
SR2 to SR7					
DO in mg/L	Wet	Dry	Wet	Dry	
Surface & Middle	3.1	5.6	2.6	4	
Bottom	2.4	5.8	1.9	2	
SS in mg/L	O 120% of upstream of the same tide of	9.5 12.3 OR 20% of upstream control station(s) at the same tide of the same day, whichever is higher 9.5 OR 130% of upstream control state the same tide of the same whichever is higher		PR control station(s) at f the same day,	
Turbidity in NTU	9.7 OR 120% of upstream control station(s) at the same tide of the same day, whichever is higher		O 130% of upstream the same tide o	11.8 OR 130% of upstream control station(s) at the same tide of the same day, whichever is higher	
SR8 to SR10					
DO in mg/L	Wet	Dry	Wet	Dry	
Surface & Middle	5	5.6	5	5	
Bottom	2.4	5.8	2	2	
SS in mg/L	9.5 OR 120% of upstream control station(s) at the same tide of the same day, whichever is higher			PR control station(s) at f the same day,	
Turbidity in NTU	9. O 120% of upstream the same tide o	9.7 OR 120% of upstream control station(s) at the same tide of the same day, whichever is higher		.8 R control station(s) at f the same day, r is higher	

Notes:

- 1. Wet season: April to September; Dry season: October to March.
- 2. For DO measurement, non-compliance occurs when the monitoring result is lower than the limits.
- 3. For parameters other than DO, non-compliance of water quality occurs when the monitoring result is higher than the limits.
- 4. Depth-averaged results are used unless specified otherwise.
- 5. SR1 is monitored for SS only.
- All the figures given in the table are used for reference only and the EPD may amend the figures whenever it is considered as necessary.

3.2 Alert Levels

The Alert levels for water quality at near stations are presented in **Table 4.1**.

Table 3.2: Calculated Initial Alert Levels

Alert Level	A1	A2	A3	A4	A5		
Turbidity (NTU)	30.1	18.4	38.8	32.0	24.3		
DO (mg/L) - Depth-average, Dry Season	4	4	4	4	4		
	OR 0.1 mg/L	less than the	same day cor	ntrol, whicheve	r is lower		
DO (mg/L) - Bottom, Dry Season	2	2	2	2	2		
	OR 0.1 mg/L	OR 0.1 mg/L less than the same day control, whichever is lower					
DO (mg/L) - Depth-average, Wet Season	3	3	3	3	3		
	OR 0.1 mg/L less than the same day control, whichever is lower						
DO (mg/L) - Bottom, Wet Season	0.9	0.9	0.9	0.9	0.9		
	OR 0.1 mg/L	less than the	same day cor	ntrol, whicheve	r is lower		

Note: Wet season: April to September; Dry season: October to March.

3.3 Review of Alert Levels

As stated in the Construction Phase Quarterly Water Quality Monitoring Report No. 3 (August–October 2020), it is recommended to review the Alert Levels for turbidity once there is adequate exceedance cases for reference. Since there were no exceedances of turbidity during the reporting period, the existing Alert Levels shown in **Table 3.2** will continue to apply.

4 Monitoring Results


Marine water quality monitoring was conducted as scheduled during the reporting period. Graphical presentations of the monitoring results are provided in **Appendix A**.

The water quality monitoring results for DO, turbidity and SS obtained during the reporting period were within their corresponding Action Levels, Limit Levels and Alert Levels.

5 Conclusion

Monitoring work for water quality was conducted during the reporting period in accordance with the updated EM&A Manual.

The water quality monitoring results for all parameters obtained during the reporting period were within the corresponding Action, Limit or Alert Levels stipulated in the EM&A programme.

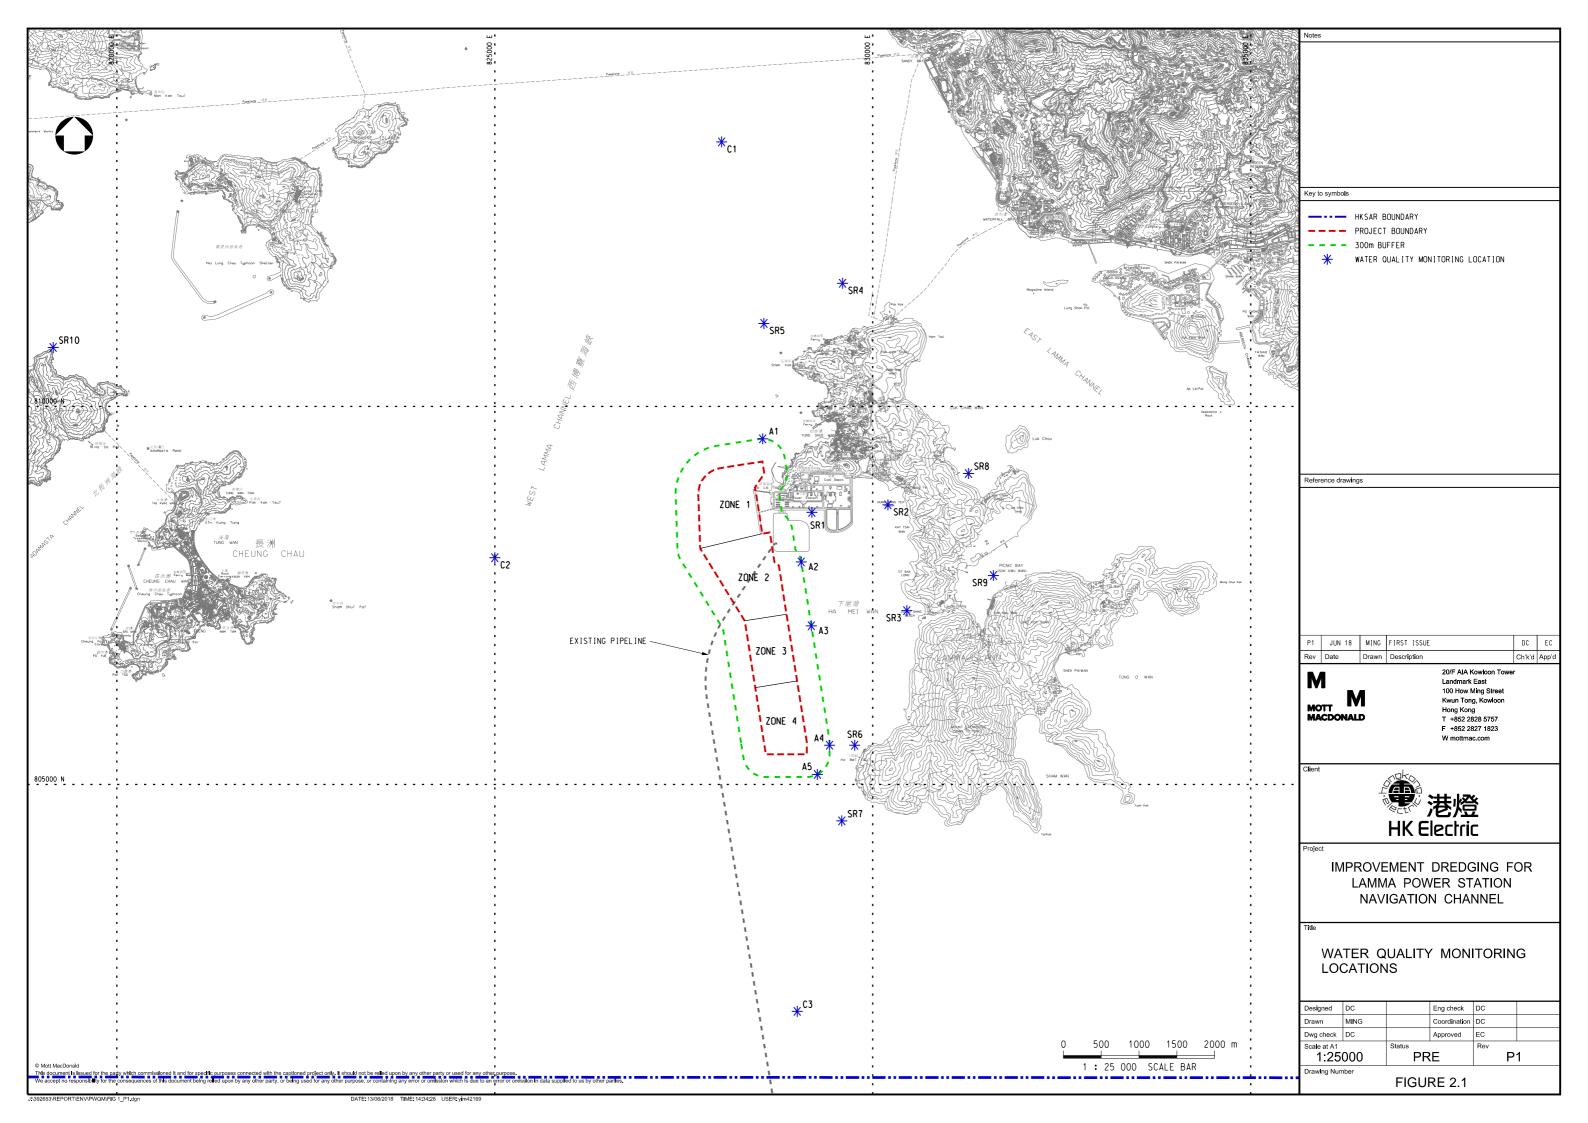



Appendix


A. Graphical Presentations of Water Quality Monitoring Results

10


A. Graphical Presentations of Water Quality Monitoring Results

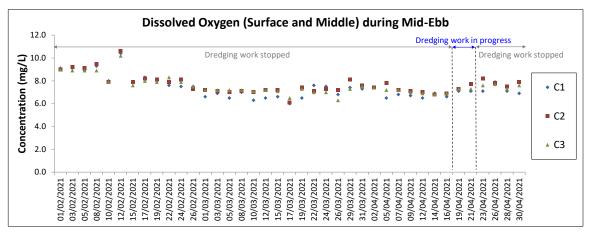


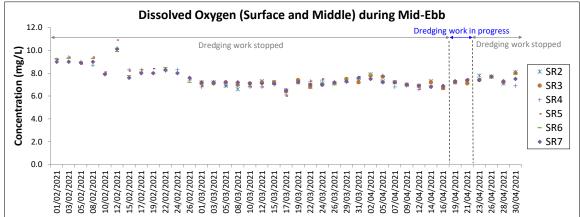


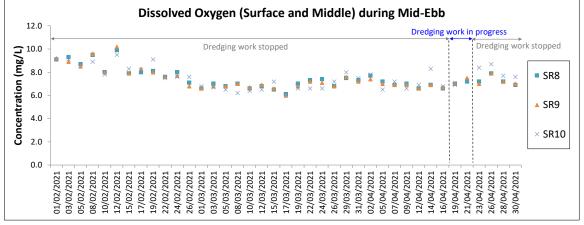


- 1. General weather condition during monitoring ranged from fine to rainy, with sea condition ranged from calm to rough. Detailed meteorological conditions can be referred to the corresponding Monthly Water Quality Monitoring Reports.
- 2. As specified in the Updated EM&A Manual, SR2 and SR3 were monitored during bathing season only (March to October inclusive).

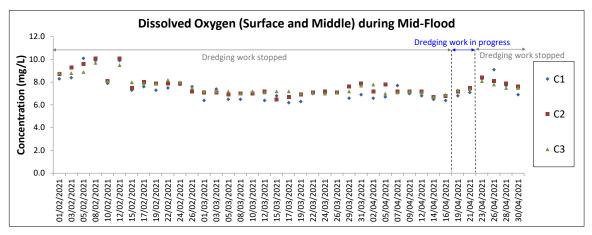


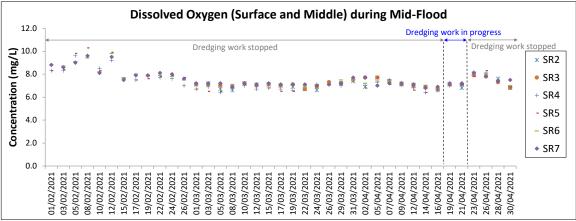

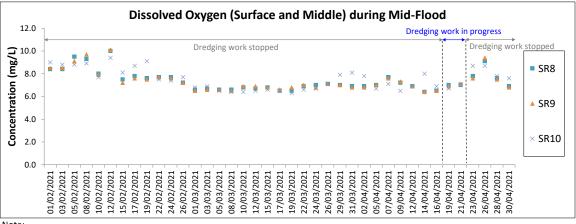



- 1. General weather condition during monitoring ranged from fine to rainy, with sea condition ranged from calm to rough. Detailed meteorological conditions can be referred to the corresponding Monthly Water Quality Monitoring Reports.
- 2. As specified in the Updated EM&A Manual, SR2 and SR3 were monitored during bathing season only (March to October inclusive).

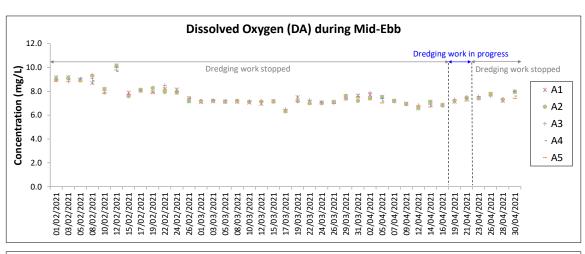


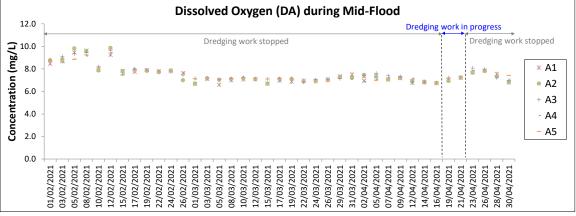


1. General weather condition during monitoring ranged from fine to rainy, with sea condition ranged from calm to rough. Detailed meteorological conditions can be referred to the corresponding Monthly Water Quality Monitoring Reports.

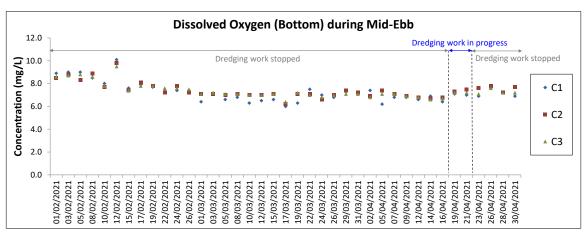


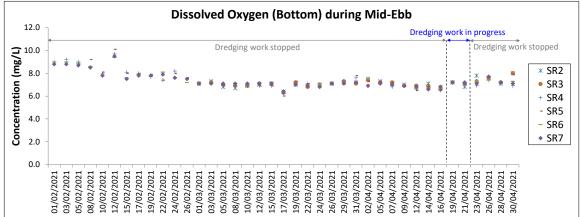


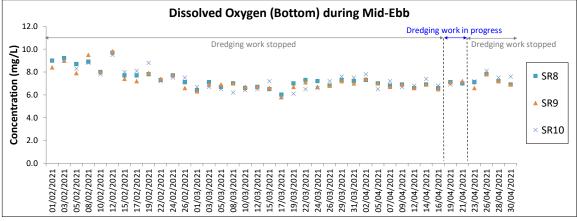


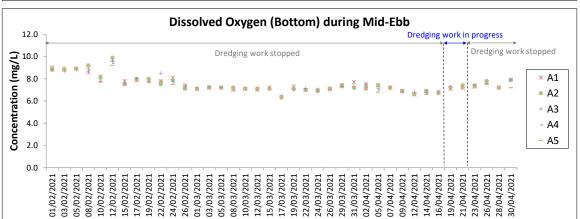


- 1. General weather condition during monitoring ranged from fine to rainy, with sea condition ranged from calm to rough. Detailed meteorological conditions can be referred to the corresponding Monthly Water Quality Monitoring Reports.
- 2. As specified in the Updated EM&A Manual, SR2 and SR3 were monitored during bathing season only (March to October inclusive).

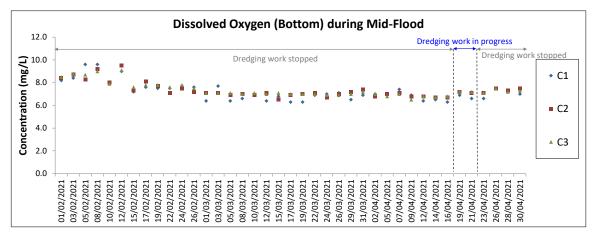


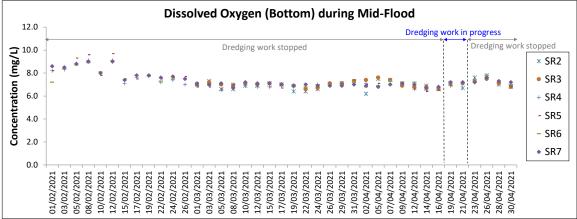


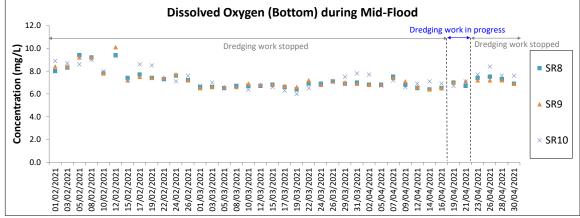


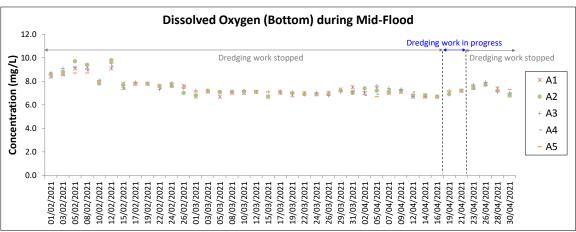


- 1. General weather condition during monitoring ranged from fine to rainy, with sea condition ranged from calm to rough. Detailed meteorological conditions can be referred to the corresponding Monthly Water Quality Monitoring Reports.
- 2. As specified in the Updated EM&A Manual, SR2 and SR3 were monitored during bathing season only (March to October inclusive).

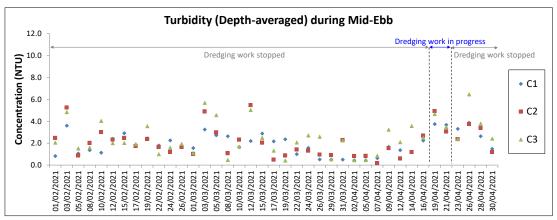


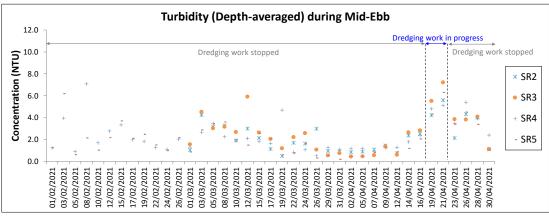


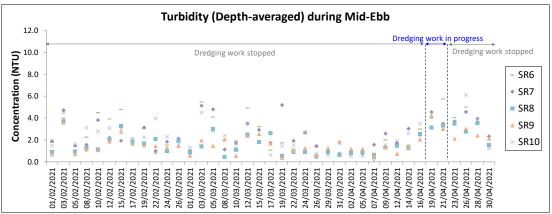


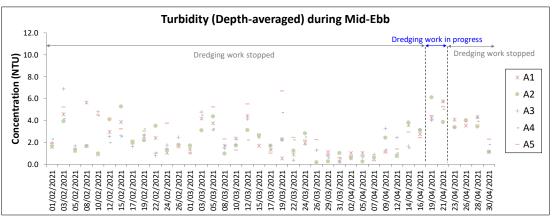


- 1. General weather condition during monitoring ranged from fine to rainy, with sea condition ranged from calm to rough. Detailed meteorological conditions can be referred to the corresponding Monthly Water Quality Monitoring Reports.
- 2. As specified in the Updated EM&A Manual, SR2 and SR3 were monitored during bathing season only (March to October inclusive).

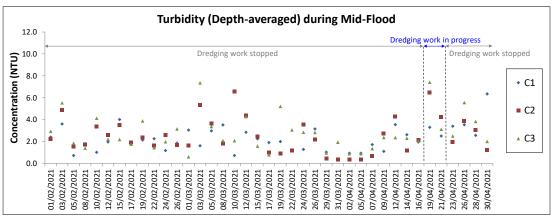


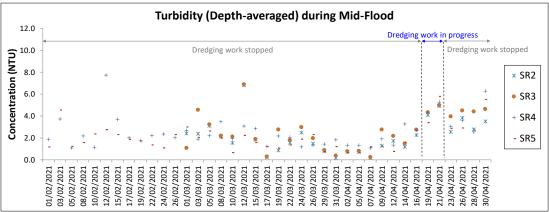


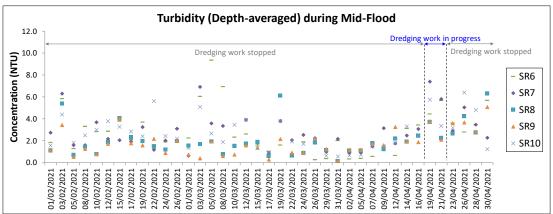


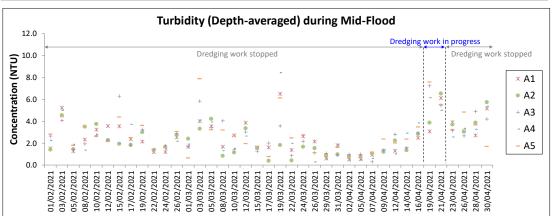


- 1. General weather condition during monitoring ranged from fine to rainy, with sea condition ranged from calm to rough. Detailed meteorological conditions can be referred to the corresponding Monthly Water Quality Monitoring Reports.
- 2. As specified in the Updated EM&A Manual, SR2 and SR3 were monitored during bathing season only (March to October inclusive).

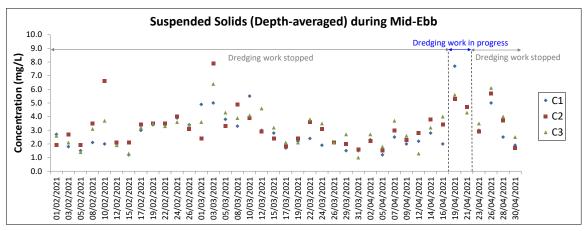


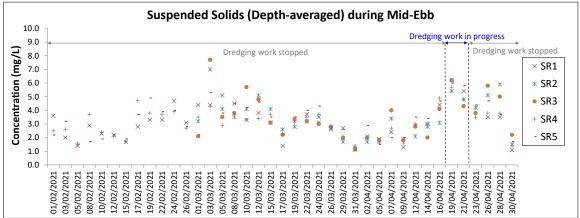


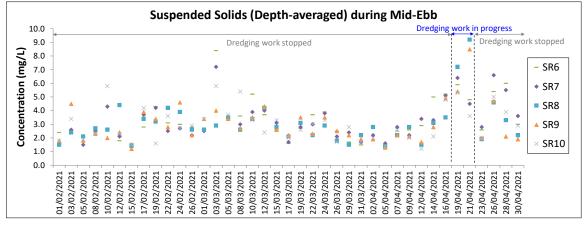


- 1. General weather condition during monitoring ranged from fine to rainy, with sea condition ranged from calm to rough. Detailed meteorological conditions can be referred to the corresponding Monthly Water Quality Monitoring Reports.
- 2. As specified in the Updated EM&A Manual, SR2 and SR3 were monitored during bathing season only (March to October inclusive).

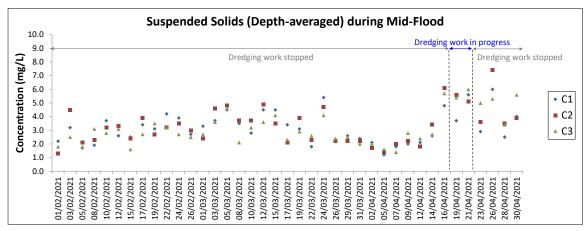

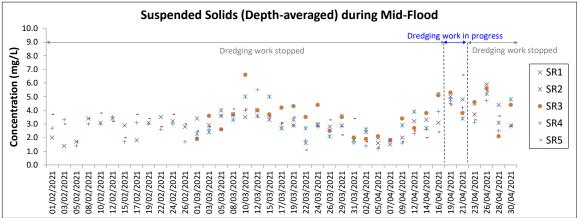

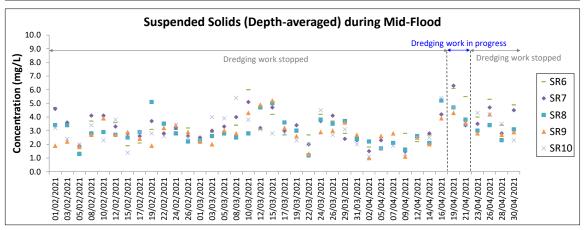

- 1. General weather condition during monitoring ranged from fine to rainy, with sea condition ranged from calm to rough. Detailed meteorological conditions can be referred to the corresponding Monthly Water Quality Monitoring Reports.
- 2. As specified in the Updated EM&A Manual, SR2 and SR3 were monitored during bathing season only (March to October inclusive).

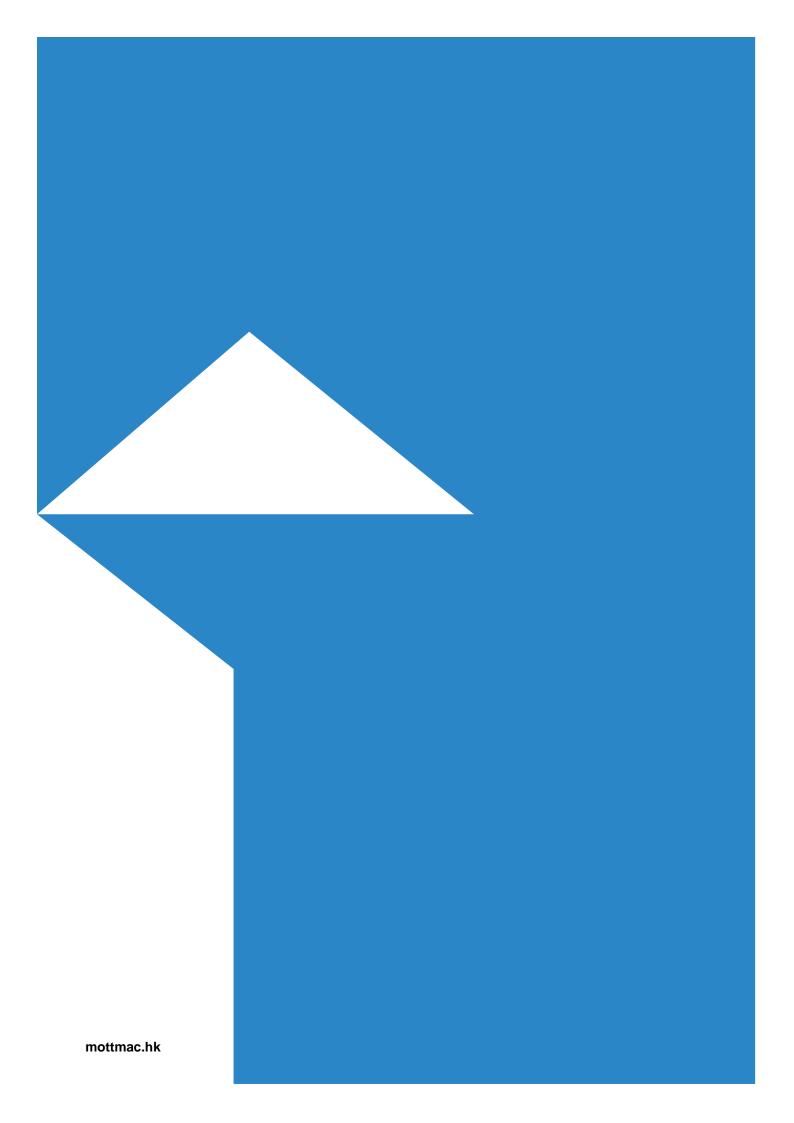

Annex D Alert/Event and Action Plans

D1: Event and Action Plan for Water Quality at SR Stations

	Action				
Event	ET Leader	IEC	Engineer	Contractor	
Action level being exceeded by one sampling day	Repeat in-situ measurements to confirm findings; Inform IEC, Contractor and Engineer; Check monitoring data, all plant, equipment and Contractor's working methods; Discuss mitigation measures with IEC, Engineer and Contractor; Repeat in-situ measurement on next day of exceedance.	Discuss with ET, Engineer and Contractor on the mitigation measures; Review proposals on mitigation measures submitted by Contractor and advise Engineer accordingly; Verify the effectiveness of the implemented mitigation measures.	 Discuss with IEC, ET and Contractor on the mitigation measures; Make agreement on the mitigation measures to be implemented; Supervise the implemented of agreed mitigation measures. 	 Identify source(s) of impact; Inform the Engineer and confirm notification of the non-compliance in writing; Rectify unacceptable practice; Check all plant and equipment; Consider changes of working methods; Discuss with ET, IEC and Engineer and propose mitigation measures; Implement the agreed mitigation measures 	
Action Level being exceeded on more than one consecutive sampling day	 Repeat in-situ measurement to confirm findings; Inform IEC, Contractor and Engineer; Check monitoring data, all plant, equipment and Contractor's working methods; Discuss mitigation measures with IEC, Engineer and Contractor; Ensure mitigation measures are implemented; Prepare to increase the monitoring frequency to daily; Confirm the need for reducing dredging rates as per G2. 	 Discuss with ET, Engineer and Contractor on the mitigation measures; Review proposals on mitigation measures submitted by Contractor and advise Engineer accordingly; Verify the effectiveness of the implemented mitigation measures; Verify the need for reducing dredging rates as per G2. 	 Discuss with IEC, ET and Contractor on the proposed mitigation measures; Make agreement on the mitigation measures to be implemented; Discuss with ET, IEC and Contractor on the effectiveness of the implemented mitigation measures; Instruct the Contractor to reduce dredging rates as per G2 if confirmed by ET and verified by IEC. 	Identify the	

	Action				
Event	ET Leader	IEC	Engineer	Contractor	
Limit Level being exceeded by one sampling day	Repeat in-situ measurement to confirm findings; Inform IEC, Contractor and Engineer; Check monitoring data, all plant, equipment and Contractor's working methods; Discuss mitigation measures with IEC, Engineer and Contractor; Ensure mitigation measures are implemented; Increase the monitoring frequency to daily until no exceedance of limit level.	 Discuss with ET, Engineer and Contractor on the mitigation measures; Review proposals on mitigation measures submitted by Contractor and advise Engineer accordingly; Verify the effectiveness of the implemented mitigation measures. 	 Discuss with IEC, ET and Contractor on the proposed mitigation measures; Request Contractor to critically review the working methods; Make agreement on the mitigation measures to be implemented; Discuss with ET, IEC and Contractor on the effectiveness of the implemented mitigation measures. 	 Identify the source(s) of impact; Inform the Engineer and confirm notification of the noncompliance in writing; Rectify unacceptable practice; Check all plant and equipment; Consider changes of working methods; Discuss with ET, IEC and Engineer and propose mitigation measures to Engineer and IEC within 3 working days of notification; Implement the agreed mitigation measures. 	
Limit Level being exceeded by more than one consecutive sampling days	 Inform IEC, Contractor and Engineer; Check monitoring data, all plant, equipment and Contractor's working methods; Discuss mitigation measures with IEC, Engineer and Contractor; Ensure mitigation measures are implemented; Confirm the need for reducing dredging rates as per D2; Increase the monitoring frequency to daily until no exceedance of limit level for two consecutive days. 	 Discuss with ET, Engineer and Contractor on the mitigation measures; Review proposals on mitigation measures submitted by Contractor and advise Engineer accordingly; Verify the effectiveness of the implemented mitigation measures; Verify the need for reducing dredging rates as per D2. 	 Discuss with IEC, ET and Contractor on the proposed mitigation measures; Request Contractor to critically review the working methods; Make agreement on the mitigation measures to be implemented; Discuss with ET, IEC and Contractor on the effectiveness of the implemented mitigation measures; Instruct the Contractor to reduce dredging rates as per D2 if confirmed by ET and verified by IEC. 	 Identify the source(s) of impact; Inform the Engineer and confirm notification of the noncompliance in writing; Rectify unacceptable practice; Check all plant and equipment; Consider changes of working methods; Discuss with ET, IEC and Engineer and propose mitigation measures to Engineer and IEC within 3 working days of notification; Implement the agreed mitigation measures; As directed by the Engineer, reduce dredging rates as per D2. 	

D2. Reduction of Maximum Allowable Hourly Dredging Rates due to Exceedances

Frequency of	No. of Consecutive Sampling Days					
Exceedance	Two	Three	Four	Five	Six	More than Six
Action Level	5%	10%	15%	20%	30%	40%
Limit Level	10%	20%	30%	40%	50%	Stop all dredging works for one week. Contractor to propose changes in dredging methods, dredging rates and mitigation measures for agreement with ET and IEC before re-initiating dredging works.

Note: Where action level followed by limit level is exceeded consecutively, the larger percentage reduction shall apply (e.g. if action level is exceeded for four consecutive days, followed immediately by two consecutive days of limit level exceedance, the percentage reduction to be applied between Day 2 and Day 6 shall be 5%, 10%, 15%, 20% and 30% respectively). Similarly, where limit level followed by action level is exceeded consecutively, the larger percentage reduction also applies as action level is inherently exceeded whenever limit level is exceeded.

D3. Alert Action Plan

The Alert Action Plan applies to exceedances of Alert levels at the near stations (A1 to A5) only. Upon identification of an exceedance of Alert level, the actions as in Alert Action Plan shall be implemented. Where applicable, the alert related actions shall proceed in parallel with the Event and Action Plan.

Action		Action By	Outcome	Follow Up Action	Follow Up Action By
1.	Repeat in-situ measurement	ET	No exceedance in repeat measurement	No further action required	
	to confirm findings		Exceedance identified in repeat measurement	Proceed to Action 2	
2.	Check relevant SR station	ET	No exceedance of Action or Limit Level	Notify IEC, Engineer and Contractor	ET
results				Obtain and record Contractor's working methods and the status of existing mitigation measures implemented	ET
				Identify any unacceptable practice	ET, IEC, Engineer
				Rectify any unacceptable practice	Contractor
				Proceed to Action 3	
			Exceedance of Action or Limit Level	Initiate Event and Action Plan in Action or Limit Level	ET, IEC, Engineer, Contractor
				Proceed to Action 3	
3.	Check for repeated cases	ET	No consecutive repeats of Outcome 2a or 2b	No further action required	
of Outcome 2a or 2b		Consecutive repeats of Outcome 2a	Review Contractor's working methods / mitigation measures and discuss with IEC, Engineer and Contractor	ET	
				Identify and agree on improvements such as changes in working methods and/or additional mitigation measures	ET, IEC, Engineer, Contractor
				Implement the recommended improvements	Contractor
			Consecutive repeats of Outcome 2b	Review Alert levels and propose revised Alert levels where necessary to prevent exceedances at SR stations (due to project activities)	ET
				Verify the revised Alert levels	IEC
				Notify and agree with EPD on revised Alert levels	ET, Project Proponent

Annex E Site Audit Summary

Period: February 2021

There was no dredging work performed in the reporting month. Therefore, no weekly site audit was carried out. Independent Environmental Checker (IEC) conducted a site inspection on 26 February 2021 to audit the water quality monitoring works. The monitoring works were generally satisfactory.

Dates of Inspection: N.A.

Summary of Findings

General

No environmental deficiency identified.

Water Quality & Marine Ecology

- No environmental deficiency identified.

Hazard to Life

- No environmental deficiency identified.

Waste Management

No environmental deficiency identified.

Noise

No environmental deficiency identified.

Period: March 2021

There was no dredging work performed in the reporting month. Therefore, no weekly site audit was carried out. Independent Environmental Checker (IEC) conducted a site inspection on 26 March 2021 to audit the water quality monitoring works. The monitoring works were generally satisfactory.

Dates of Inspection: N.A.

Summary of Findings

General

No environmental deficiency identified.

Water Quality & Marine Ecology

- No environmental deficiency identified.

Hazard to Life

No environmental deficiency identified.

Waste Management

No environmental deficiency identified.

Noise

No environmental deficiency identified.

Period: April 2021

<u>Dates of Inspection</u>: 16/04/2021, 22/4/2021 and 30/4/2021 (Dredger was deployed at the dredging site from 16/04/2021 to 30/04/2021 in the reporting month.)

Summary of Findings

General

No environmental deficiency identified.

Water Quality & Marine Ecology

No environmental deficiency identified.

Hazard to Life

No environmental deficiency identified.

Waste Management

No environmental deficiency identified.

Noise

- No environmental deficiency identified.

Annex F Summary of EMIS

EM&A Log Ref.	Mitigation Measures	Implementation Status
EM&A: 2.10	Dredging shall be conducted by either closed grab dredgers and/or TSHDs. The grab dredgers shall not be operating at the same time as the TSHDs.	С
EM&A: 2.10	The dredging rates for the Project shall not exceed the maximum allowable dredging rates for each respective working zone and for the respective dredging method.	С
EM&A: 2.10	Adequate clearance to the seabed shall be provided to vessel at all states of tide.	С
EM&A: 2.10	No overflow is permitted and use of lean mixture overboard (LMOB) system is prohibited.	С
EM&A: 2.10	Closed grab capacity of grab dredger should not be less than 8m³ (except near the submarine pipeline where smaller grabs may be used).	С
EM&A: 2.10	Cage-type silt curtains (at least 10m depth) shall be deployed for grab dredgers in accordance with the Silt Curtain Deployment Plan	С
EM&A: 3.2	No dredging shall be carried out at Zone 4 of the navigation channel during the calving season for the Finless Porpoise from February to April.	С
EM&A: 3.2	As far as practicable, vessel movements to disposal grounds bypass the Finless Porpoise habitat area in southwest and east Lamma.	С
EM&A: 3.2	Implement a maximum speed limit of 10 knots in south and east Lamma waters.	С
EM&A: 3.2	All vessel operators working on the Project should be thoroughly briefed on the possible occurrence of Finless Porpoise within and in the vicinity of the Project Area and along routes to the Project Area, as well as rules for safe vessel operation around cetaceans.	С
EM&A: 5.2 & 5.3	Marine vessels should avoid traveling during berthing and unberthing of coal vessel.	С
EM&A: 5.2 & 5.3	As far as practicable, marine vessels should avoid traveling after sunset or under low visibility when the works area is near submarine pipeline.	С
EM&A: 5.2 & 5.3	Working vessel not to stay right above the submarine pipeline unless it is necessary.	С
EM&A: 5.2 & 5.3	TSHD should not lower suction pipes in close proximity of the submarine pipeline.	N/A
EM&A: 5.2 & 5.3	TSHD should not stay near the submarine pipeline unless approval is granted.	N/A
EM&A: 6.1	The number of dredgers and operation conditions specified in the applicable CNPs should be strictly followed.	С
EM&A: 7.2 & 7.3	Monitoring of the barge loading should be conducted to ensure that loss of material does not take place during transportation.	С
EM&A: 7.2 & 7.3	All barges and hoppers shall be fitted with tight fitting seals to their bottom openings to prevent leakage of material.	С

EM&A Log Ref.		Implementation Status
7.2 & 7.3	The Real Time Tracking and Monitoring of Vessel (RTTMV) system should be installed in hoppers/ TSHD for monitoring the mud dumping activities.	С

Remarks:

C - Compliance with mitigation measure NC - Non-compliance with mitigation measure

N/A - Not Applicable