


PLANTING SCHEDULE

Code	Botanical Name	Size	Spacing (mm)	Quantity
TREE	Bambax malabaricum	Heavy Standard	4000	6
LF	Liquidambar formosana	Heavy Standard	4000	9
SAS	Sapum sebiferum	Heavy Standard	4000	6
SHRUB MIX		Height	Spacing	Quantity
25%	Rhodomyrtus tomentosa	450mm	300mm	200
25%	Liquidambar sinensis	450mm	300mm	200
25%	Raphiglypis indica	300mm	300mm	200
25%	Melastoma sanguineum	450mm	300mm	200
CLIMBERS		Spacing	Quantity	
Pah	Parthenocissus himalayana	Climbers	2000mm	1080
Hydroseeding				670m ²

5. Schedule of Hydroseeding Seed Mix :

Hydroseeding Mix	Common Name	Rate of Application
Between April and August :		
- Gynodon dactylon	Bermuda grass	13-15 g/sq.m
- Paspalum notatum	Bahia grass	8-10 g/sq.m
- Other species from list below :	Rhodes grass	1-4 g/sq.m
- Chloris guyana	Weeping love grass	(2% max.)
- Eragrostis curvula	Centipede grass	
- Eragrostis curvula	Buffel grass	
TOTAL		Min. 25 g/sq.m.
Between September and March :		
- Gynodon dactylon	Bermuda grass	15 g/sq.m
- Paspalum notatum	Bahia grass	10 g/sq.m
- Lolium perenne	Manhattan Rye grass	5 g/sq.m
TOTAL		Min. 30 g/sq.m

- Notes:
- Weeds, rubbish, litter, stones exceeding 50mm diameter and all deleterious material shall be removed.
 - Heavy standard trees shall be over 3500mm total height, stem diameter between 50mm and 100mm measured at 1m above soil level, and rootball at least 100mm diameter and 350mm deep.
 - Trees to be planted in stagger pattern in group of 3-7.
 - Shrubs to be planted in stagger pattern.

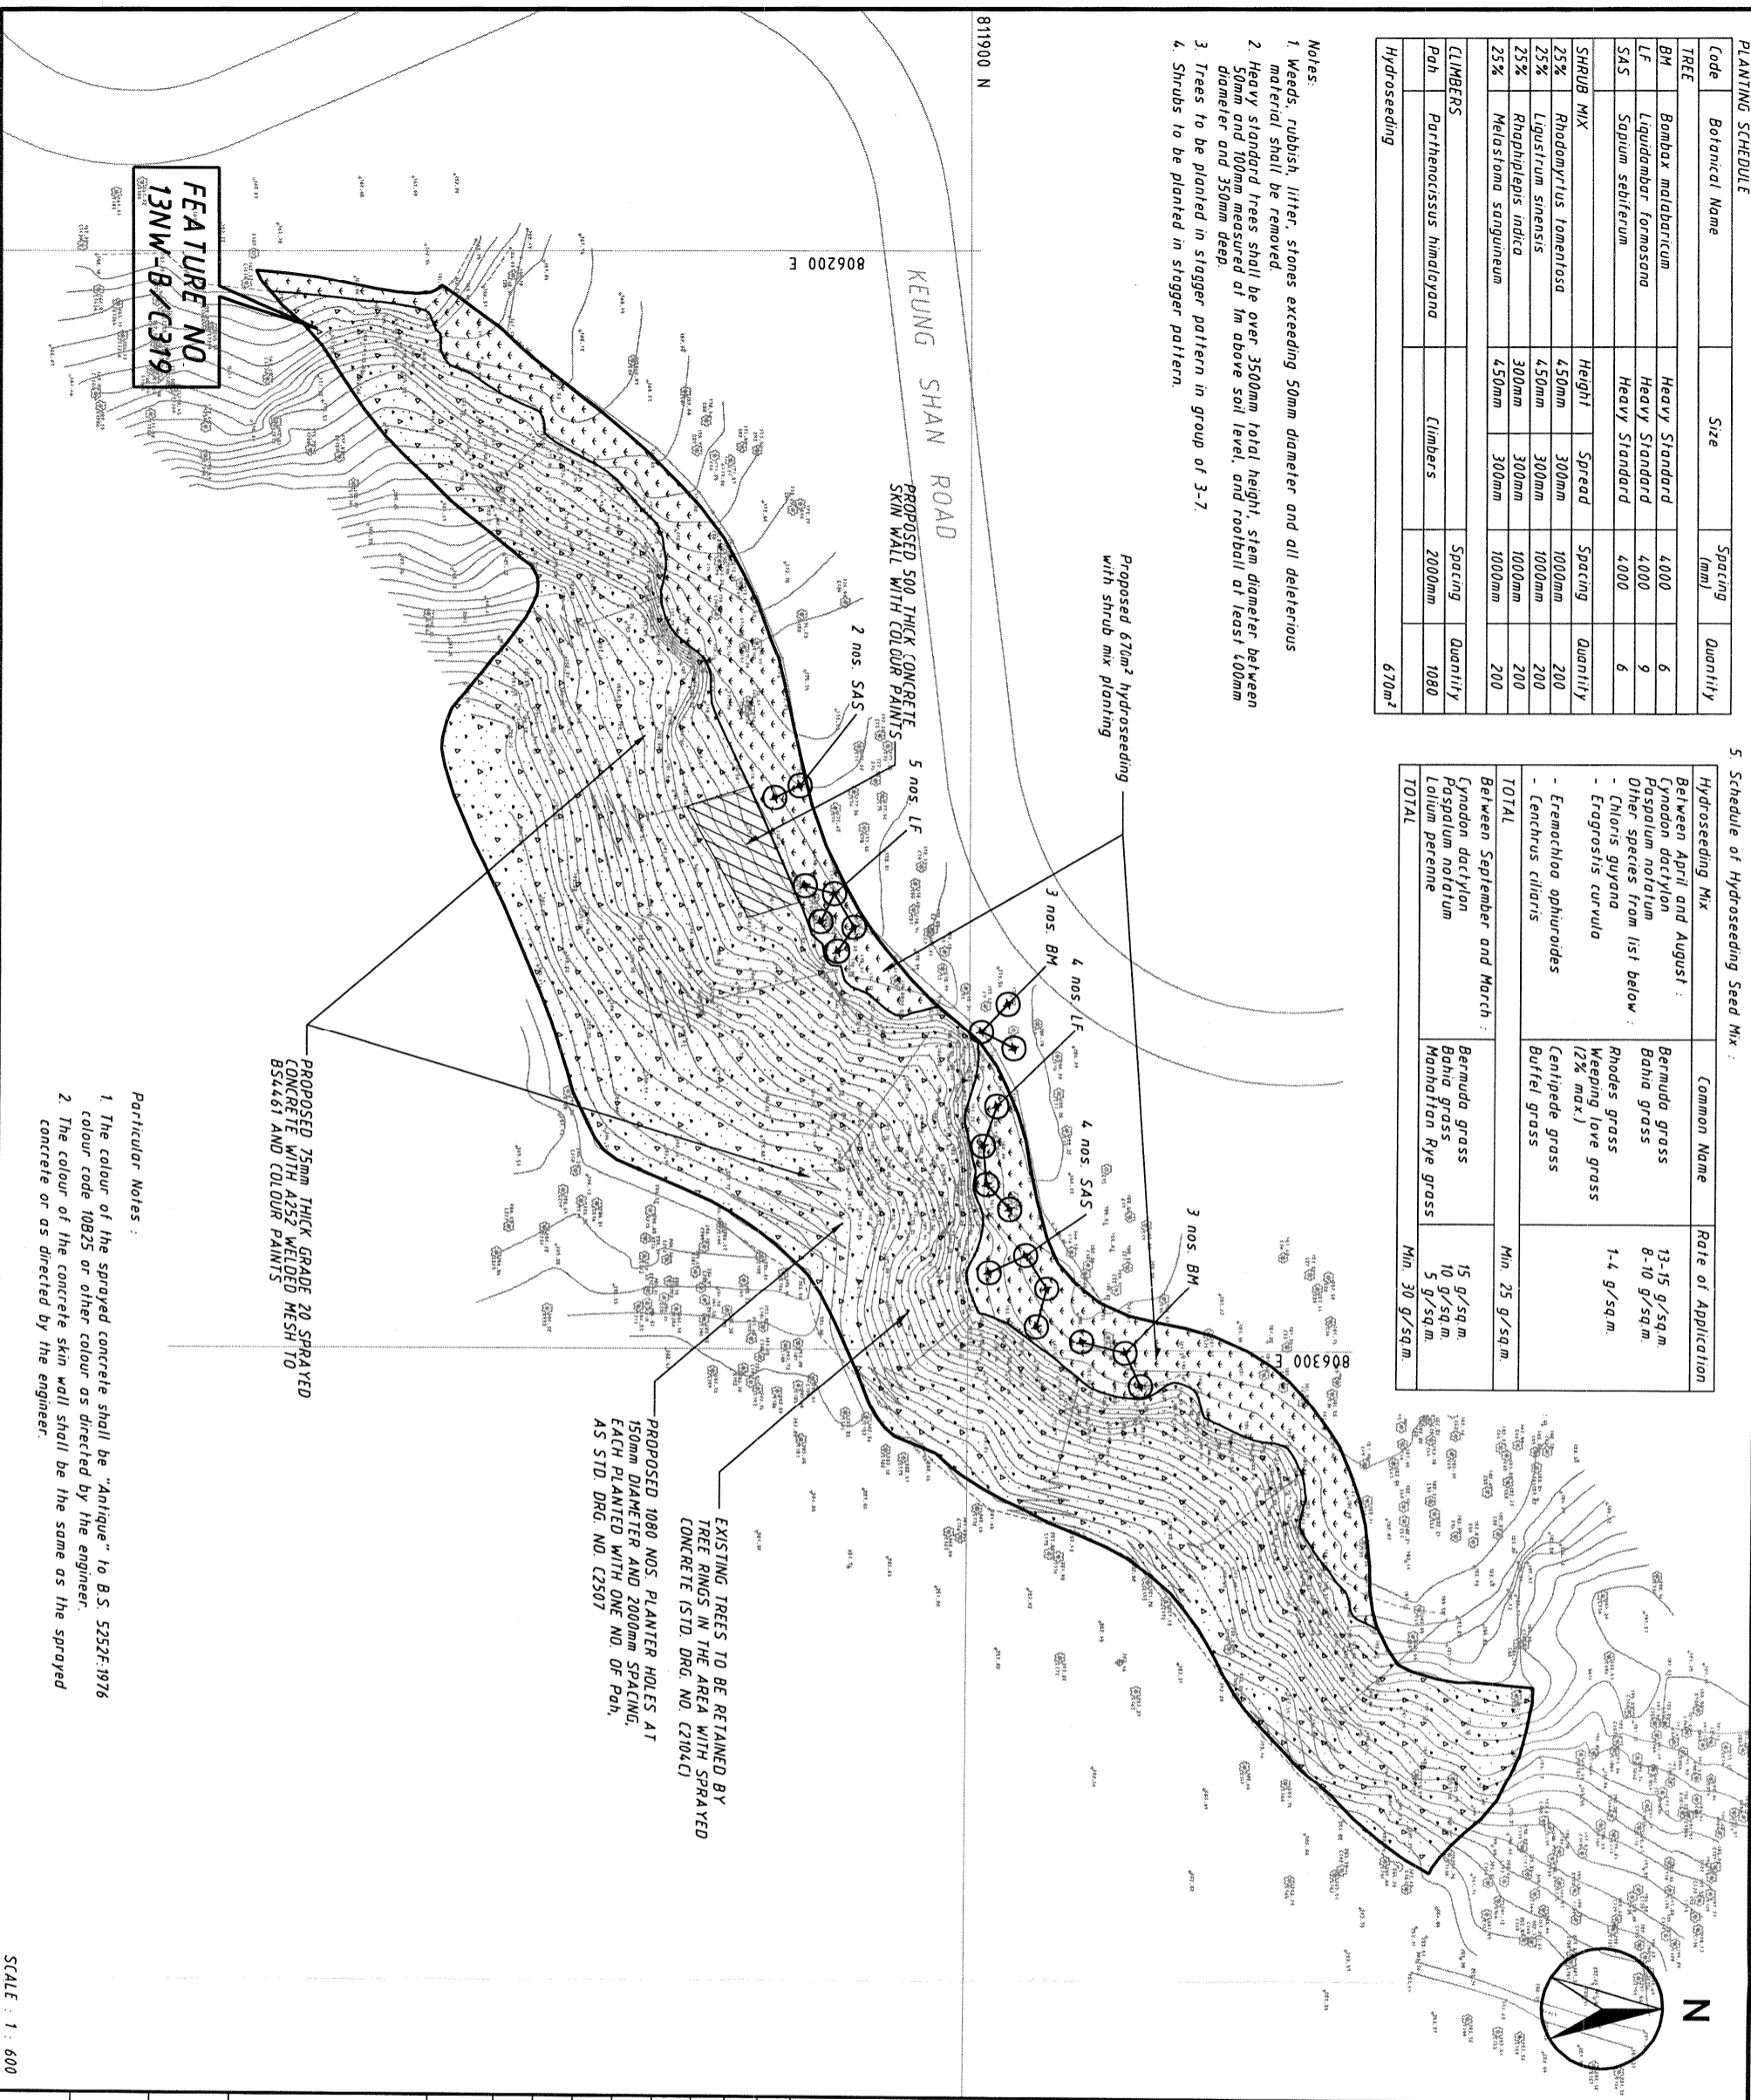

- Particular Notes :
- The colour of the sprayed concrete shall be "Antique" to B.S. 5252F:1976 colour code 10835 or other colour as directed by the engineer.
 - The colour of the concrete skin wall shall be the same as the sprayed concrete or as directed by the engineer.

PROPOSED 75mm THICK GRADE 20 SPRAYED CONCRETE WITH A252 WELDED MESH TO BS4461 AND COLOUR PAINTS

EXISTING TREES TO BE RETAINED BY TREE RINGS IN THE AREA WITH SPRAYED CONCRETE (STD. DRG. NO. C2104C)

PROPOSED 1080 NOS. PLANTER HOLES AT 150mm DIAMETER AND 2000mm SPACING, EACH PLANTED WITH ONE NO. OF Pah, AS STD. DRG. NO. C2307

NOTES:

- THIS DRAWING SHALL BE READ IN CONJUNCTION WITH ALL OTHER RELEVANT DRAWINGS, STANDARD DRAWINGS, THE SPECIFICATIONS AND INSTRUCTIONS ISSUED BY THE ENGINEER.
- FOR NOTES REFER TO DRG. NO. 52102/309-12

LEGEND

- 50 — FEATURE BOUNDARY
- 17.9 — EXISTING CONTOUR LINE
- — EXISTING GROUND LEVEL
- — EXISTING SLOPE
- ⊗ EXISTING TREE LOCATION
- ▨ PROPOSED SPRAYED CONCRETE WITH COLOUR PAINTS AND PLANTER HOLES
- ▧ PROPOSED 500 THICK CONCRETE SKIN WALL WITH COLOUR PAINTS
- ▩ PROPOSED HYDROSEEDING WITH SHRUB MIX PLANTING
- ⊗ PROPOSED HEAVY STANDARD TREES

No.	Date	Description	Initial
REVISION			

Designed	SOSL	08/04
Drawn	CJL	08/04
Checked	VCSA	08/04
Approved	HYN	08/04
Contract No.	GE/2004/12	
Figure No.	3	08/04

LANDSCAPE PROPOSAL FOR THE DESIGNATED PROJECT

GEOTECHNICAL ENGINEERING OFFICE

Civil Engineering and Development Department

Maunsell
MANUSSELL ENVIRONMENTAL MANAGEMENT CONSULTANTS LTD

SCALE : 1 : 600