


SCHEMATIC LAYOUT
N.T.S.

NOTE:

1. SUITABLY DESIGNED NOISE INSULATING FABRIC SHOULD ACHIEVE AT LEAST 5 dB(A) NOISE REDUCTION.
2. THE NOISE INSULATING FABRIC SHOULD BE PROPERLY INSTALLED TO ENSURE NO OPENING/GAP AT THE JOINTS.

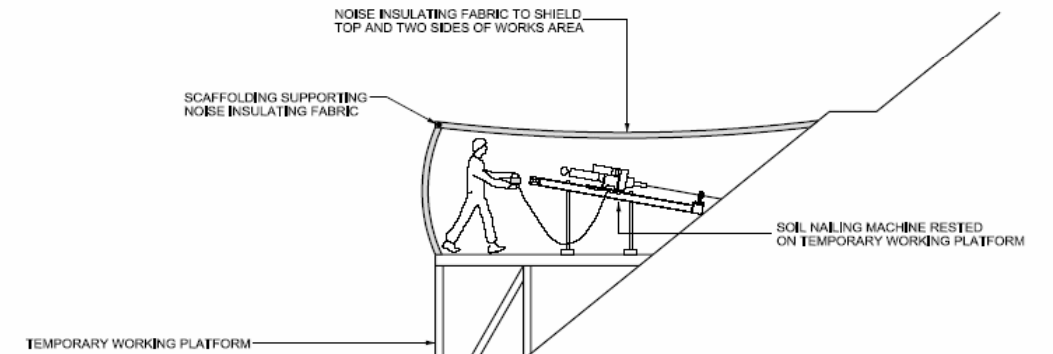

SECTION A-A
N.T.S.