


Typical Noise Enclosure for Static Plant (e.g. Air Compressors, Generators etc.)
~3-4m wall

Minimum surface density of 14 kg/m²

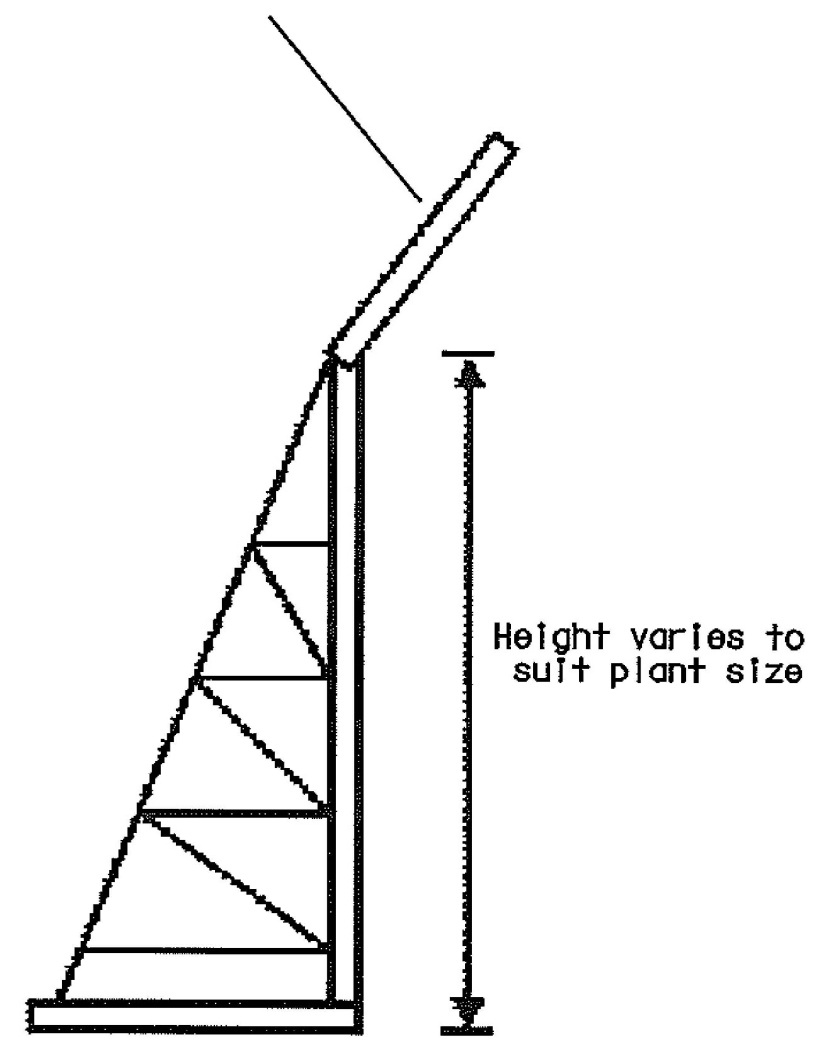

Typical Section of Temporary Movable Noise Barrier
(3-5m tall)

\$PLOTDRW\$ \$MODEL\$ \$FILES\$ \$DATE\$ \$USER\$ \$PRINTED BY\$ \$TIME\$ \$REV\$ \$DESCRIPTION\$ \$BY\$ \$DATE\$ \$APPROVED\$ \$REV\$ \$DESCRIPTION\$ \$BY\$ \$DATE\$ \$APPROVED\$ \$CADD REF\$ \$TITLE\$ \$SCALE\$ \$DRAWING NO\$ \$APPENDIX\$ \$REV\$

REV	DESCRIPTION	BY	DATE	APPROVED	REV	DESCRIPTION	BY	DATE	APPROVED
A	FIRST ISSUE								

DRAWN	KM
DESIGNED	KM
CHECKED	FC
APPROVED	ST
DATE	Aug/11

MTR

SHATIN TO CENTRAL LINK

ORIGINATOR

ARUP Ove Arup & Partners
Hong Kong Limited

CADD REF. NEX2206_C_SCL_OAP_ENV_004B

TITLE	NEX 2206 - SCL (HHS) Sketch of Typical Temporary Noise Barrier / Enclosure	
SCALE	N.T.S.	DRAWING NO. Appendix 8.5
REV.	A	