


500m
 Assessment
 Boundary


REMARKS:
 AIR QUALITY OBJECTIVES CRITERION FOR DAILY AVERAGE FSP CONCENTRATION IS 75 $\mu\text{g}/\text{m}^3$, WITH 9 EXCEEDANCE CASES ALLOWED.

LEGEND:
 ROCK CAVERN WORKS BOUNDARY
 AIR SENSITIVE RECEIVERS (CONSTRUCTION PHASE)

This drawing has been prepared for the use of AECOM's client. It may not be used, modified, reproduced or relied upon by third parties, except as agreed by AECOM or as required by law. AECOM accepts no responsibility, and denies any liability whatsoever, to any party that uses or relies on this drawing without AECOM's express written consent. Do not scale this document. All measurements must be obtained from the stated dimensions.



Project
 DEVELOPMENT OF ANDERSON ROAD QUARRY SITE - INVESTIGATION, DESIGN AND CONSTRUCTION

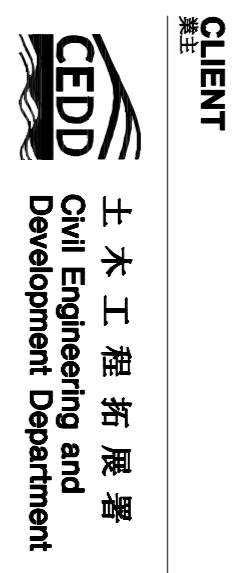

CONSULTANT
 AECOM Asia Company Ltd.
 www.aecom.com

ISSUE/REVISION

NO.	DATE	DESCRIPTION	CHK.
1	JUN 15	FIRST DRAFT	
2	AUG 15	SECOND DRAFT	

STATUS

SCALE
 A3 1:4000

KEY PLA



SHEET TITLE

CONTOURS OF CUMULATIVE HIGHEST 10TH 24-HOUR AVERAGE FSP CONCENTRATION IN $\mu\text{g}/\text{m}^3$ AT 1.5M ABOVE GROUND (UNMITIGATED)

PROJECT NO. 60328348
CONTRACT NO. CE 10/2014 (CE)
SHEET NUMBER 4.4