

**REMARKS:**  
 AAO CRITERION FOR DAILY AVERAGE RSP CONCENTRATION IS 100 µg/m³, WITH 9 EXCEEDANCE CASES ALLOWED.

- LEGEND:**
- LTR/SMR R/W
  - 500M ASSESSMENT AREA
  - PATH Grid Cell (I,J)
  - EXISTING REPRESENTATIVE ASR (FOR BOTH CONSTRUCTION AND OPERATIONAL PHASE ASSESSMENT)
  - PLANNED REPRESENTATIVE ASR (FOR BOTH CONSTRUCTION AND OPERATIONAL PHASE ASSESSMENT)
  - PLANNED REPRESENTATIVE ASR (FOR OPERATIONAL PHASE ASSESSMENT ONLY)

This drawing has been prepared for the use of AECOM's client. It may not be used, modified, reproduced or relied upon by third parties, except as agreed by AECOM or as required by law. AECOM accepts no responsibility, and denies any liability whatsoever, to any party that uses or relies on this drawing without AECOM's express written consent. Do not scale this document. All measurements must be obtained from the stated dimensions.



**Project**  
 DEVELOPMENT OF ANDERSON ROAD QUARRY SITE - INVESTIGATION, DESIGN AND CONSTRUCTION

**CLIENT**  
 CEDD  
 土木工程拓展署  
 Civil Engineering and Development Department

**CONSULTANT**  
 AECOM Asia Company Ltd.  
 www.aecom.com


**ISSUE/REVISION**

NO.	DATE	DESCRIPTION	CHK.

**STATUS**

SCALE  
 A3 1 : 7000

**KEY PLA**

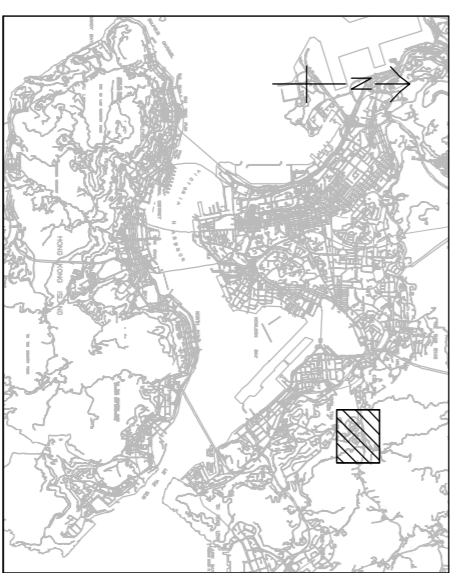

**PROJECT NO.** 60328348  
**CONTRACT NO.** CE 10/2014 (CE)

**SHEET TITLE**  
 CONTOURS OF CUMULATIVE HIGHEST 10TH DAILY AVERAGE RSP CONCENTRATION IN µg/m³ AT 1.5m ABOVE GROUND (LTR R/W) (UNMITIGATED)

**SHEET NUMBER**  
 60328348/EIA\_RIW/FIGURE 4.14