

**REMARKS:**  
 EIAO-TM CRITERION FOR HOURLY AVERAGE TSP  
 CONCENTRATION IS 500 µg/m³.

**LEGEND:**

- EXISTING REPRESENTATIVE ASR (FOR BOTH CONSTRUCTION AND OPERATIONAL PHASE ASSESSMENT)
- PLANNED REPRESENTATIVE ASR (FOR BOTH CONSTRUCTION AND OPERATIONAL PHASE ASSESSMENT)
- PLANNED REPRESENTATIVE ASR (FOR OPERATIONAL PHASE ASSESSMENT ONLY)
- (L,U) PATH Grid Cell (L,U)
- LTR/SMR R/W
- 500M ASSESSMENT AREA

This drawing has been prepared for the use of AECOM's client. It may not be used, modified, reproduced or relied upon by third parties, except as agreed by AECOM or as required by law. AECOM accepts no responsibility, and denies any liability whatsoever, to any party that uses or relies on this drawing without AECOM's express written consent. Do not scale this document. All measurements must be obtained from the stated dimensions.



**Project**  
 DEVELOPMENT OF  
 ANDERSON ROAD  
 QUARRY SITE -  
 INVESTIGATION, DESIGN  
 AND CONSTRUCTION

**CLIENT**  
 CEDD  
 土木工程拓展署  
 Civil Engineering and  
 Development Department

**CONSULTANT**  
 AECOM Asia Company Ltd.  
 www.aecom.com


**ISSUE/REVISION**

NO.	DATE	DESCRIPTION	CHK.

**STATUS**

**SCALE**  
 A3 1 : 7000

**KEY PLA**

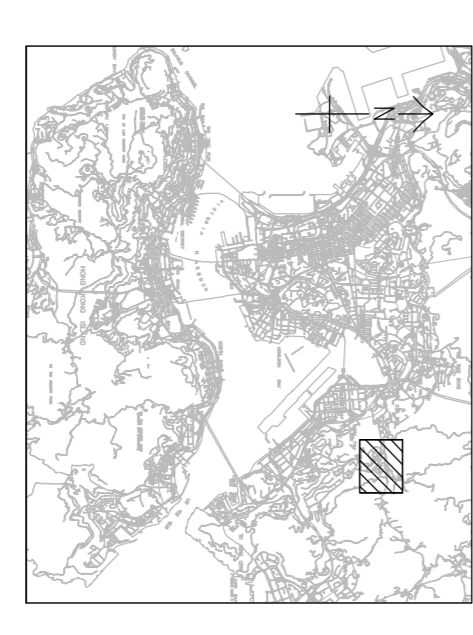

**PROJECT NO.** 60328348  
**CONTRACT NO.** CE 10/2014 (CE)

**SHEET TITLE**  
 CONTOURS OF CUMULATIVE  
 MAXIMUM 1-HOUR AVERAGE TSP  
 CONCENTRATION IN µg/m³ AT 1.5m  
 ABOVE GROUND (LTR R/W)  
 (MITIGATED Tier 2 - for ASECP-2)  
**SHEET NUMBER**  
 60328348/EIA\_RIW/FIGURE 4.23a