

REMARKS:
 AAO CRITERION FOR DAILY AVERAGE RSP
 CONCENTRATION IS 100 µg/m³, WITH 9
 EXCEEDANCE CASES ALLOWED.

LEGEND:

- EXISTING REPRESENTATIVE ASR
(FOR BOTH CONSTRUCTION AND
OPERATIONAL PHASE ASSESSMENT)
- PLANNED REPRESENTATIVE ASR
(FOR BOTH CONSTRUCTION AND
OPERATIONAL PHASE ASSESSMENT)
- PLANNED REPRESENTATIVE ASR
(FOR OPERATIONAL PHASE
ASSESSMENT ONLY)
- (L) LTR/SMR R/W
- (L) 500M ASSESSMENT AREA
- (L) PATH Grid Cell (L)

This drawing has been prepared for the use of AECOM's client. It may not be used, modified, reproduced or relied upon by third parties, except as agreed by AECOM or as required by law. AECOM accepts no responsibility, and denies any liability whatsoever, to any party that uses or relies on this drawing without AECOM's express written consent. Do not scale this document. All measurements must be obtained from the stated dimensions.

AECOM

Project
 DEVELOPMENT OF
 ANDERSON ROAD
 QUARRY SITE -
 INVESTIGATION, DESIGN
 AND CONSTRUCTION

CLIENT
 CEDD
 土木工程拓展署
 Civil Engineering and
 Development Department

CONSULTANT
 AECOM Asia Company Ltd.
 www.aecom.com


ISSUE/REVISION

NO.	DATE	DESCRIPTION	CHK.

SCALE

A3 1 : 7000

KEY PLA

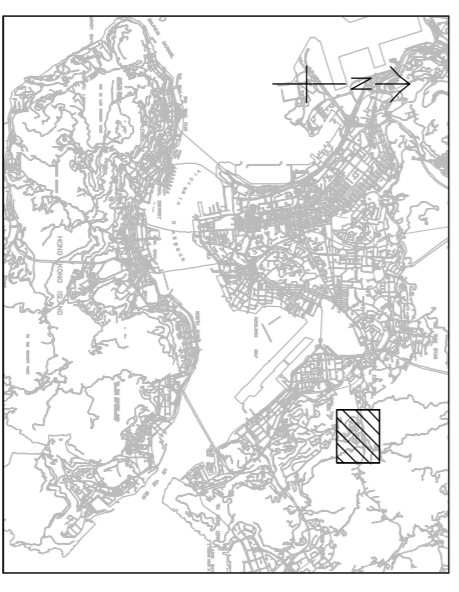

PROJECT NO. 60328348
CONTRACT NO. CE 10/2014 (CE)

SHEET TITLE
 CONTOURS OF CUMULATIVE HIGHEST
 10TH DAILY AVERAGE RSP
 CONCENTRATION IN µg/m³ AT 1.5m
 ABOVE GROUND (LTR R/W)
 MITIGATED TIER 2 - FOR ASECP-2 &
 ATTE-3)

SHEET NUMBER
 60328348/EIA_RIW/FIGURE 4.24a