

REMARKS:
 AAO CRITERION FOR DAILY AVERAGE RSP CONCENTRATION IS 100 µg/m³, WITH 9 EXCEEDANCE CASES ALLOWED.

- LEGEND:**
- EXISTING REPRESENTATIVE ASR (FOR BOTH CONSTRUCTION AND OPERATIONAL PHASE ASSESSMENT)
 - PLANNED REPRESENTATIVE ASR (FOR BOTH CONSTRUCTION AND OPERATIONAL PHASE ASSESSMENT)
 - PLANNED REPRESENTATIVE ASR (FOR OPERATIONAL PHASE ASSESSMENT ONLY)
 - (L,U) LTR/SMR R/W
 - (L,U) 500M ASSESSMENT AREA
 - (L,U) PATH Grid Cell (L,U)

This drawing has been prepared for the use of AECOM's client. It may not be used, modified, reproduced or relied upon by third parties, except as agreed by AECOM or as required by law. AECOM accepts no responsibility, and denies any liability whatsoever, to any party that uses or relies on this drawing without AECOM's express written consent. Do not scale this document. All measurements must be obtained from the stated dimensions.



Project
 DEVELOPMENT OF ANDERSON ROAD QUARRY SITE - INVESTIGATION, DESIGN AND CONSTRUCTION

CLIENT
 CEDD
 土木工程拓展署
 Civil Engineering and Development Department

CONSULTANT
 AECOM Asia Company Ltd.
 www.aecom.com


ISSUE/REVISION

NO.	DATE	DESCRIPTION	CHK.

SCALE

A3 1 : 7000

KEY PLA

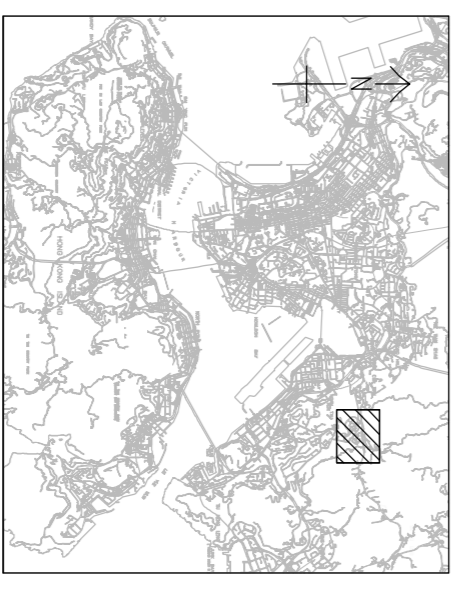

SHEET TITLE

CONTOURS OF CUMULATIVE HIGHEST 10TH DAILY AVERAGE RSP CONCENTRATION IN µg/m³ AT 1.5m ABOVE GROUND (LTR R/W) (MITIGATED TIER 2 - FOR ATEH-4)

SHEET NUMBER

60328348/EIA_RIW/FIGURE 4.24c

PROJECT NO. 60328348
CONTRACT NO. CE 10/2014 (CE)