




APPENDIX 4.9

TYPICAL CONFIGURATION OF NOISE BARRIER AND PORTABLE NOISE ENCLOSURE

Typical Configuration of Noise Barrier and Portable Noise Enclosure

Minimum surface density of 14kg/m²

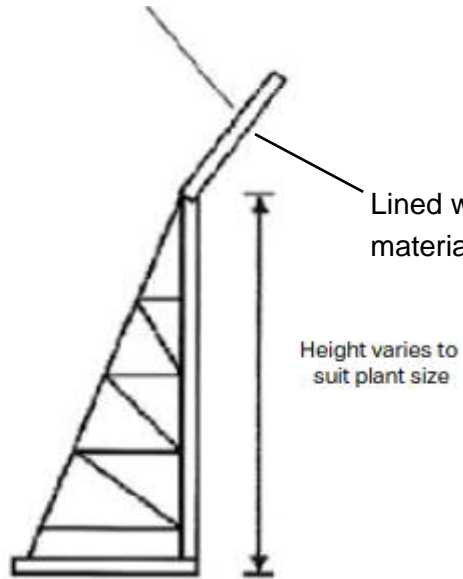


Lined with sound absorbent material at the inner surfaces

Typical Configuration of Noise Barrier (~3-5m high)

Lined with sound absorbent material at the inner surfaces

Minimum surface density of 14kg/m²

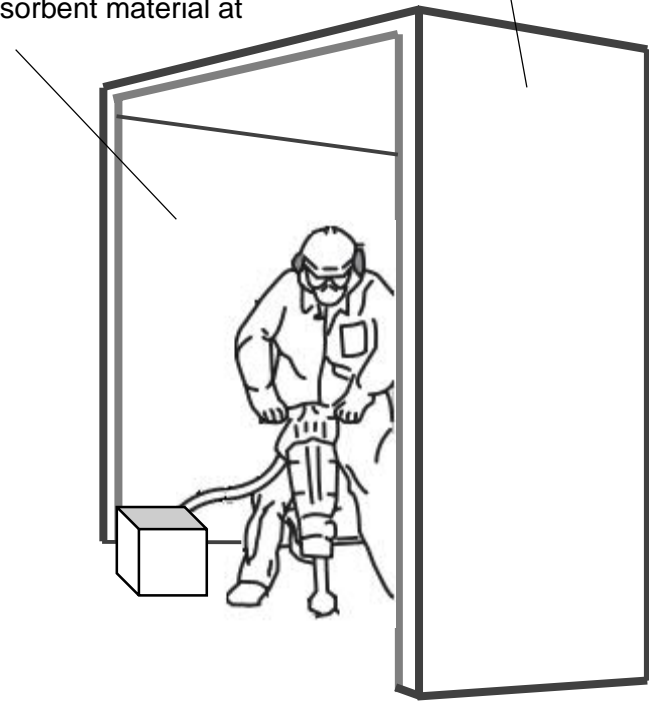

Typical Configuration of Portable Noise Enclosure (~2m high)