


## Typical Configuration of Noise Barrier and Portable Noise Enclosure

Minimum surface density of  $14\text{kg/m}^2$

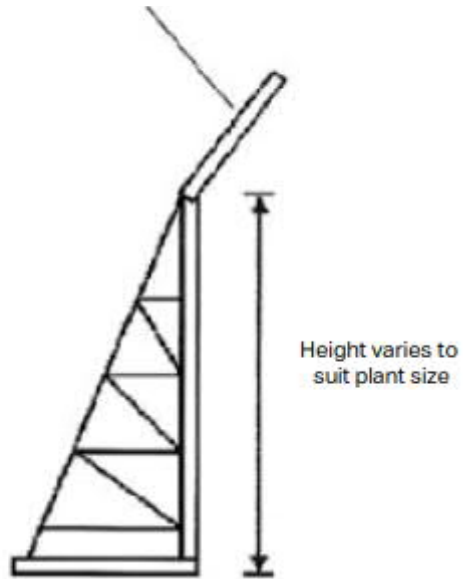

Typical Configuration of Noise Barrier (~3-5m high)

Lined with sound absorbent material at the inner surfaces

Minimum surface density of  $14\text{kg/m}^2$



Typical Configuration of Portable Noise Enclosure (~2m high)