



TEST REPORT



China Harbour Engineering Co Ltd


**Contract No.: CV/2021/09
Handling of Surplus Public Fill
(2022-2023)**

TSEUNG KWAN O AREA 137 FILL BANK


MONTHLY EM&A REPORT NO.13

(JANUARY 2023)

Prepared by:


LAU, Wing Sum
Assistant Environmental Officer

Checked by:


LAU, Chi Leung
Environmental Team Leader

Issue Date: 17 February 2023

Report No.: ENA30695

Our Ref: PL-202303009

ETS-Testconsult Limited
8/F, Block B, Veristrong Industrial Centre
34-36 Au Pui Wan Street
Fo Tan, Hong Kong

Attention: Mr. C. L. Lau

6 March 2023

Dear Mr. Lau,

RE: Contract No. CV/2021/09
Handling of Surplus Public Fill (2022-2023)
Monthly EM&A Report (No. 13) for January 2023 for the Tseung Kwan O Area 137 Fill Bank

Reference is made to your submission of the Monthly EM&A Report for January 2023 for the TKO Area 137 Fill Bank, we are pleased to inform you that we have no adverse comment on the report.

Thank you for your attention. Please do not hesitate to contact us should you have any queries.

Yours faithfully,



F. C. Tsang
Independent Environmental Checker

cc. CEDD – Mr. P. C. LEUNG

TABLE OF CONTENTS		Page
EXECUTIVE SUMMARY		
1.0	<u>INTRODUCTION</u>	1
2.0	<u>PROJECT INFORMATION</u>	
	2.1 Scope of the Project	1
	2.2 Site Description	1
	2.3 Work Programme	2
	2.4 Project Organization and Management Structure	2
	2.5 Contact Details of Key Personnel	2
3.0	<u>WORK PROGRESS IN THIS REPORTING PERIOD</u>	2
4.0	<u>AIR QUALITY MONITORING</u>	
	4.1 Monitoring Requirement	2
	4.2 Monitoring Equipment	2
	4.3 Monitoring Parameters, Frequency and Duration	2
	4.4 Monitoring Locations and Schedule	3
	4.5 Monitoring Methodology	3
	4.6 Action and Limit levels	3-4
	4.7 Event-Action Plans	4
	4.8 Results and Observation	4
5.0	<u>NOISE MONITORING</u>	
	5.1 Monitoring Requirements	4
	5.2 Monitoring Equipment	4
	5.3 Monitoring Parameters, Duration and Frequency	4-5
	5.4 Monitoring Locations	5
	5.5 Monitoring Procedures and Calibration Details	5
	5.6 Action and Limit levels	5
	5.7 Event-Action Plans	5
	5.8 Results and Observation	5-6
6.0	<u>MARINE WATER QUALITY MONITORING</u>	
	6.1 Monitoring Requirements	6
	6.2 Monitoring Locations	6
	6.3 Monitoring Parameters	6-7
	6.4 Monitoring Frequency	7
	6.5 Monitoring Methodology and Equipment Used	7 - 8
	6.6 Action and Limit Level	9
	6.7 Event and Action Plan	9
	6.8 Monitoring Duration in this reporting period	9
	6.9 Marine Water Monitoring Results	10
7.0	<u>ENVIRONMENTAL AUDIT</u>	
	7.1 Weekly ET Site Inspections and EPD's Site Inspection	10-11
	7.2 Review of Environmental Monitoring Procedures	11
	7.3 Assessment of Environmental Monitoring Results	11
	7.4 Advice on the Solid and Liquid Waste Management Status	11 -12
8.0	<u>STATUS OF ENVIRONMENTAL LICENSING AND PERMITTING</u>	12-13
9.0	<u>ENVIRONMENTAL NON-CONFORMANCE</u>	
	9.1 Summary of air quality, noise and marine water quality	13
	9.2 Summary of Environmental Complaints	13
	9.3 Summary of Notification of Summons and Prosecution	13
10.0	<u>IMPLEMENTATION STATUS</u>	
	10.1 Implementation Status of Environmental Mitigation Measures	13
	10.2 Implementation Status of Event and Action Plan	13
	10.3 Implementation Status of Environmental Complaint, Notifications of Summons and Successful Prosecutions Handling	13
11.0	<u>CONCLUSION AND RECOMMENDATIONS</u>	13-14
12.0	<u>FUTURE KEY ISSUE</u>	
	12.1 Work Programme for the Coming Month	15
	12.2 Key Issues for the Coming Month	15-16
	12.3 Monitoring Schedule for the Coming Month	16

APPENDIX

A	Organization Chart and Lines of Communication
B1	Calibration Certificates for Impact Air Quality Monitoring Equipment
B2	Impact Air Quality Monitoring Results
B3	Graphical Plots of Impact Air Quality Monitoring Data
C1	Calibration Certificates for Impact Noise Monitoring Equipment
C2	Impact Noise Monitoring Results
C3	Graphical Plots of Impact Noise Monitoring Data
D1	Calibration Certificates for Impact Marine Water Quality Monitoring Equipment
D2	Impact Marine Water Quality Monitoring Results
D3	Graphical Plots of Impact Marine Water Quality Monitoring Data
D4	Impact Marine Water Quality Monitoring Results (3RS project)
D5	Graphical Plots of Impact Marine Water Quality Monitoring Data (3RS project)
E	Weather Condition
F	Event-Action Plans
G	Work Programme
H	Weekly ET's Site Inspection Record
I	Implementation Schedule of Mitigation Measures
J	Site General Layout Plan
K	Monthly Summary Waste Flow Table
L	Monitoring Schedule for the Coming Month
M	Reporting Month Monitoring Schedule
N	Complaint Log

FIGURES

Figure 1	Locations of Water Quality Monitoring Stations – Tseung Kwan O Area 137 Fill Bank
Figure 2	Location of Noise Monitoring Station – Tseung Kwan O Area 137 Fill Bank
Figure 3	Locations of Air Quality Monitoring Stations – Tseung Kwan O Area 137 Fill Bank
Figure 4	Locations of Water Quality Monitoring Stations (3RS project) – Tseung Kwan O Area 137 Fill

TABLES

2.1	Contact Details of Key Personnel
4.1	Air Quality Monitoring Equipment
4.2	Monitoring parameters, duration and frequency of air quality monitoring
4.3	Air Quality Monitoring Locations
4.4	Action and Limit levels for 24-hr TSP and 1-hr TSP
5.1	Noise Monitoring Equipment
5.2	Duration, Frequency and Parameters of noise monitoring
5.3	Noise Monitoring Location
5.4	Action and Limit levels for noise monitoring
6.1	Locations of Marine Water Monitoring Stations
6.2	Locations of Additional Marine Water Monitoring Stations (3RS project)
6.3	Marine Water Quality Monitoring Parameters
6.4	Monitoring frequency of the marine water
6.5	Summary of testing procedures
6.6	Details of Marine Water Quality Monitoring Equipment (In-site measurement)
6.7	Water Quality Action and Limit Levels
6.8	Water Quality Action and Limit Levels (3RS project)
6.9	Time Schedule of Impact Marine Water Quality Monitoring
6.10	Summary of Impact Marine Water Quality Exceedances
6.11	Summary of Impact Marine Water Quality Exceedances (3RS project)
7.1	Key Findings of Weekly ET Site Audits in this reporting period
7.2	Actual amounts of Waste generated in this reporting period
8.1	Summary of environmental licensing and permit status
10.1	Summary of Environmental Complaints and Prosecutions

EXECUTIVE SUMMARY

This monthly Environmental Monitoring and Audit (EM&A) report No.13 was prepared by ETS-Testconsult Ltd (ET) for “Contract No: CV/2021/09 – Handling of Surplus Public Fill (2022-2023) – Tseung Kwan O (TKO) Area 137 Fill Bank” (The Project).

This report documented the findings of EM&A Works conducted during the operation phase of Fill Bank at TKO Area 137 in January 2023.

Site Activities

As informed by the Contractor, the site activities in this reporting period were as below:

1. Operation of the Public Fill Reception Facilities at Tseung Kwan O Fill Bank (TKOFB);
2. Operation of dewatering plant at TKOFB;
3. Operation and Maintenance of crushing plants at TKOFB;
4. Operation and Maintenance of Artificial Intelligent System for Crushing Plant at TKOFB;
5. Operation of the Integrated Public Fill Reception at TKOFB;
6. Operation and Maintenance of the Wash House at TKOFB;
7. Personnel Position Tracking and Proximity Detection System of Moving Plant at TKOFB;
8. Modification and Operation a Digital Works Supervision System (DWSS) for TKOFB;
9. Operation and maintenance of Wheel Washing Bays and Facilities at TKOFB;
10. Maintenance of the Drainage Systems at TKOFB;
11. Construction of Gabion Wall at TKOFB;
12. Upgrade of Integrated Public Fill Reception Platform at TKOFB
13. Trial Production of Blanket Layer Material Recycled from Public Fill at TKOFB
14. Upgrading and Repairing Works for Lightning Protection System at TKOFB
15. Replacement of Steel Decking near Main Entrance at TKOFB
16. Replacement of concrete pavement at TKOFB
17. Trial sorting of 37.5mm products by screen machine and testing
18. Modification works of existing containers for trial operation for receiving slurry at TKOFB
19. Implementation of C Easy system at TKOFB (Phase 1)

Environmental Monitoring Progress

The summary of the monitoring activities in this monitoring period is listed below:

- Noise Monitoring (Day-time): 1 Occasion at 1 designated location
- 24-hour TSP Monitoring: 5 Occasions at 2 designated locations
- 1-hour TSP Monitoring: 15 Occasions at 2 designated locations
- Marine Water Quality Monitoring: 12 Occasions at 2 designated locations
- Weekly-site inspection: 5 Occasions

Noise Monitoring

No exceedance of Action and Limit levels for noise monitoring was recorded in the reporting period.

Air Monitoring

No exceedance of Action and Limit levels was recorded for 1-hr and 24-hr TSP monitoring in the reporting period.

Marine Water Quality Monitoring

According to the summary of marine water monitoring results, no exceedance of Action and Limit levels was recorded in this reporting period.

Weekly Site Inspections

In general, performance on environmental mitigation measures implemented was found to be satisfactory in this reporting period. The major findings observed during site inspections are presented in the Section 7.0.

Environmental Complaints, Notification of summons and successful prosecutions

No complaint, notification of summons or successful prosecutions with respect to environmental issues was received in this reporting period.

Future Key Issues

Based on site inspections and forecast of engineering works in coming month, key issues to be considered are as follows:

- *Noise and air quality impact due to site works;*
- *Maintain wheel washing facilities properly;*
- *Maintain all drainage and desilting facilities properly;*
- *Use and maintain silt curtain properly;*
- *Clean up the fill material on concrete pavement along the BHA frequently;*
- *Sufficient drip trays for all oil drums / chemical containers;*
- *Implement all necessary preventive measures to avoid oil leakage. In the event an oil leakage happens, the Contractor should properly remove the leaked oil and handle the contaminated soil and all materials using for this cleaning works as chemical waste;*
- *Maintain good site practice and waste management to minimize environmental impacts at the site; and*
- *Follow-up improvements on waste management issues.*

1.0 INTRODUCTION

China Harbour Engineering Co Ltd (CHEC) appointed Environmental Team (ET) of ETS-Testconsult Limited (ETL) to undertake the Environmental Monitoring and Audit (EM&A) for the “Contract No: CV/2021/09 –Handling of Surplus Public Fill (2022-2023) – Tseung Kwan O (TKO) Area 137 Fill Bank” (The Project).

In accordance with the Environmental Permit (No.: EP-134/2002/O) (the EP), an EM&A programme should be implemented in accordance with the procedures and requirements in the EM&A Manual of the approved EIA report (Registration No. AEIAR-060/2002). The EM&A programme for this study as stated in Section 2.3.1 of the EM&A Manual covers the following environmental aspects during the establishment, operation and removal phases of the Fill Bank at Tseung Kwan O Area 137:

- *Fugitive Dust;*
- *Noise generation from onsite activities;*
- *Water Quality; and*
- *Landscape and Visual.*

The EM&A programme requires environmental monitoring for air quality, noise and water quality and environmental site inspections for air quality, noise, water quality, landscape and visual, and waste management. The EM&A requirements for each parameter described in the following sections include:

- *All monitoring parameters;*
- *Monitoring schedules for the reporting period and forthcoming months;*
- *Action and Limit levels for all environmental parameters;*
- *Event/Action Plans;*
- *Environmental mitigation measures, as recommended in the Project EIA study final report; and*
- *Environmental requirements in contract documents.*

Baseline monitoring was completed in August and October 2002 by MaterialLab. Action and Limit Levels were established for air and water quality parameters based on the baseline monitoring results.

This report documented the findings of EM&A Works conducted during the operation phase of Fill Bank at Tseung Kwan O Area 137 in January 2023.

2.0 PROJECT INFORMATION

2.1 Scope of the Project

The scale and scope of the Project as stated in the EP include:

- Site clearance;
- Construction of a temporary storm water system;
- Stockpiling of 6 million m³ of public fill;
- Setting up two barging points: one at the TKO Basin and one at the Construction and Demolition Material Sorting Facility (C&DMSF) for transporting the stockpiled public fill by barges;
- Setting up a temporary barging point at the existing Explosive Off-loading Barging Point located in the south-eastern part of Area 137 for the month of May 2004 to December 2004 for transporting the stockpiled public fill by barge;
- Construction and operation of a Construction and Demolition Material Sorting Facility (C&DMSF);
- Setting up a Construction and Demolition Material Crushing Facility at the TKO Basin; and
- Remove the temporary fill bank.

2.2 Site Description

TKO Area 137 Fill Bank is located at the southern end of Wan Po Road. In the vicinity of the site are other industrial uses such as SENT landfill, TKO Industrial Estate, etc. Both Island Resort and Fullview Garden are also situated at more than 1.8km from the site. Other existing Air Sensitive Receivers (ASRs) and Noise Sensitive Receivers (NSRs), including resident developments and schools, are located at a further distance away from TKO Area 137.

2.3 Work Programme

Details of work programme are shown in Appendix G.

2.4 Project Organization and Management Structure

The project organization chart is shown in Appendix A.

2.5 Contact Details of Key Personnel

The key personnel contact names and telephone numbers are shown in Table 2.1.

Table 2.1 Contact Details of Key Personnel

Organization	Name of Key Staff	Project Role	Tel. No.	Fax No.
CEDD	Mr. C W Au Yeung, Andrew Cheung	Engineer's Representative	2623 9267 / 2762 5588	2714 0113
IEC (Acuity)	Mr. F C Tsang	IEC	2698 9097	2333 1316
Contractor (CHZH-JV)	Zhou Chang Ying	Senior Project Manager	9626 6299	2247 4108
ET (ETL)	C. L. Lau	ET Leader	2946 7791	2695 3944

3.0 WORK PROGRESS IN THIS REPORTING PERIOD

As informed by the Contractor, the activities in the reporting period include:

1. Operation of the Public Fill Reception Facilities at Tseung Kwan O Fill Bank (TKOFB);
2. Operation of dewatering plant at TKOFB;
3. Operation and Maintenance of crushing plants at TKOFB;
4. Operation and Maintenance of Artificial Intelligent System for Crushing Plant at TKOFB;
5. Operation of the Integrated Public Fill Reception at TKOFB;
6. Operation and Maintenance of the Wash House at TKOFB;
7. Personnel Position Tracking and Proximity Detection System of Moving Plant at TKOFB;
8. Modification and Operation a Digital Works Supervision System (DWSS) for TKOFB;
9. Operation and maintenance of Wheel Washing Bays and Facilities at TKOFB;
10. Maintenance of the Drainage Systems at TKOFB;
11. Construction of Gabion Wall at TKOFB;
12. Upgrade of Integrated Public Fill Reception Platform at TKOFB
13. Trial Production of Blanket Layer Material Recycled from Public Fill at TKOFB
14. Upgrading and Repairing Works for Lightning Protection System at TKOFB
15. Replacement of Steel Decking near Main Entrance at TKOFB
16. Replacement of concrete pavement at TKOFB
17. Trial sorting of 37.5mm products by screen machine and testing
18. Modification works of existing containers for trial operation for receiving slurry at TKOFB
19. Implementation of C Easy system at TKOFB (Phase 1)

4.0 AIR QUALITY MONITORING

4.1 Monitoring Requirement

TSP levels were monitored in the reporting period in accordance with the EM&A Manual. Table 4.4 shows the Action and Limit Levels for the environmental monitoring works.

4.2 Monitoring Equipment

Both 1-hour and 24-hour TSP air quality monitoring was performed using a High Volume Air Sampler (HVS) located at each of the designated monitoring station. Table 4.1 summarizes the equipment used in the air quality monitoring programme. A copy of the calibration certificates for the HVS and calibrator are attached in Appendix B1.

Table 4.1 Air Quality Monitoring Equipment

Equipment	Model and Make
HVS	Graseby 105, Andersen G1051
Calibrator	Tisch TE-5025A

4.3 Monitoring Parameters, Frequency and Duration

Table 4.2 summarizes the monitoring parameters, monitoring duration and frequencies of air quality monitoring.

Table 4.2 Monitoring parameters, duration, frequency of air quality monitoring

<i>Parameter</i>	<i>Duration</i>	<i>Frequency</i>
24-hr TSP	24 hr	Once every six days
1-hr TSP	1 hr	Three times per every six days

4.4 Monitoring Locations

Table 4.3 tabulates the air quality monitoring locations of this project.

Table 4.3 Air quality monitoring locations

<i>Monitoring station</i>	<i>Location</i>
TKO-A1	Site Egress
TKO-A2a	CREO

4.5 Monitoring Methodology

Both 1-hr and 24-hr air quality monitoring (High Volume Sampler)

Instrumentation

High volume sampler (HVS) complete with appropriate sampling inlets were employed for both 1-hour and 24-hour TSP monitoring. The sampler is composed of a motor, a filter holder, a flow controller and a sampling inlet and its performance specification complies with that required by USEPA standard Title 40, Code of Federation Regulations Chapter 1 (Part 50).

Installation

The installation of HVS refers to the requirement stated in EM&A Manual.

Operation/Analytical Procedures

Operating/analytical procedures for the operation of HVS are as below:

- Prior to the commencement of the dust sampling, the flow rate of the high volume sampler was properly set (between 0.6m³/min and 1.7m³/min.) in accordance with the manufacturer's instruction to within the range recommended in USEPA Standard Title 40, CFR Part 50. The flow rate was indicated on the flow rate chart.
- For TSP sampling, fiberglass filters (Whatman G653) were used.
- The power supply was checked to ensure the sampler worked properly.
- On sampling, the sampler was operated 5 minutes to establish thermal equilibrium before placing any filter media at designated air monitoring station.
- The filter holding frame was then removed by loosening the four nuts and carefully a weighted and conditioned filter was centered with the stamped number upwards, on a supporting screen.
- The filter was aligned on the screen so that the gasket formed an air-tight seal on the outer edges of the filter. Then the filter holder frame was tightened to the filter holder with swing bolts. The applied pressure should be sufficient to avoid air leakage at the edges.
- The programmable timer will be set for a sampling month of 1 hour or 24 hours. Information was recorded on the record sheet, which included the starting time, the weather condition and the filter number (the initial weight of the filter paper can be found out by using the filter number.).
- After sampling, the filter was transferred from the filter holder of the HVS to a sealed plastic bag and sent to the laboratory for weighting. The elapsed time was also recoded.
- Before weighting, all filters were equilibrated in a desiccator for 24 hour with the temperature of 25°C ± 3°C and the relative humidity (RH) <50% ±5%.
- All measurement procedures in Section 2.3 of the EM&A Manual were followed during the reporting period.

Maintenance & Calibration

- HVS and their accessories should be maintained in good working condition, such as replacing motor brushes routinely and checking electrical wiring to ensure a continuous power supply.
- HVS should be calibrated at bi-monthly intervals.

Wind Data Monitoring

Wind data (wind speed and wind direction) were directly extracted from Tseung Kwan O Station of Hong Kong Observatory. All wind data during this reporting period are shown in Appendix E.

4.6 Action and Limit Levels

Table 4.4 shows the Action and Limit levels for 24-hr TSP and 1-hr TSP monitoring.

Table 4.4 Action and Limit Levels for 24-hr TSP and 1-hr TSP

Monitoring Location	24-hr TSP (mg/m ³)		1-hr TSP (mg/m ³)	
	Action Level	Limit Level	Action Level	Limit Level
TKO-A1	210	260	376	500
TKO-A2a *	210	260	376	500

Remark (*): Since dust monitoring stations TKO-A2 and TKO-A2a are located close to the major dust emission sources and also close to the same sensitive receptor and no significant difference between them on the prevailing meteorological conditions, the baseline data from TKO-A2 (August and September 2002 by MateriaLab) can also be valid in the case of TKO-A2a.

4.7 Event-Action Plans

Please refer to Appendix F for details.

4.8 Results and Observation

4.8.1 1-hour and 24-hour TSP Monitoring results

Monitoring data of both 1-hour and 24-hour TSP monitoring carried out in this reporting period are summarized in Appendix B2. Graphical presentation of 1-hour and 24-hour TSP monitoring results for the reporting period is shown in Appendix B3. Wind data included wind speed and wind direction was extracted from Tseung Kwan O Station of Hong Kong Observatory during this reporting period and is presented in Appendix E.

No exceedance of Action and Limit Level of 1-hr TSP and 24-hour TSP monitoring results was recorded during the reporting period.

4.8.2 Observation

Generally, the Contractor implemented sufficient dust mitigation measures, including operation of the mist spraying systems at the CEDD Combined Reception Office and crushing plants. And the site egress area provided wheel washing facilities; Road dampening, water bowsers and automatic water sprinklers on the main haul roads. Other dust sources near TKO Area 137 also included operation of the temporary Construction Waste Sorting Facilities (CWSF) and dumping activities at the SENT Landfill.

5.0 Noise Monitoring

5.1 Monitoring Requirements

Noise monitoring was conducted at 1 monitoring station as specified in the approved EM&A Monitoring Proposal for good site practice. The equipment, parameter, frequency, duration, methodology, calibration details, results and observations of the noise monitoring for the reporting period are presented in this section.

5.2 Monitoring Equipment

An Integrating Sound Level Meter was used for noise monitoring. It was a Type 1 sound level meter capable of giving a continuous readout of the noise level reading including equivalent continuous sound pressure level (L_{eq}) and percentile sound pressure level (L_x). It complies with International

Electro Technical Commission Publications IEC 61672 Type 1 specification, and speed in m/s was used to monitor the wind speed.

Table 5.1 summarizes noise monitoring equipment model being used. A copy of the calibration certificate for noise meter and calibrator are attached in Appendix C1

Table 5.1 Noise Monitoring Equipment

<i>Equipment</i>	<i>Model</i>
<i>Sound Level Meter</i>	<i>Rion NL-52</i>
<i>Sound Level Calibrator</i>	<i>Castle GA607</i>

5.3 Monitoring Parameters, Duration and Frequency

Duration, frequencies and parameters of noise measurement are presented in Table 5.2.

Table 5.2 Duration, Frequencies and Parameters of Noise Monitoring

<i>Time</i>	<i>Duration/min</i>	<i>Parameters</i>	<i>Frequency</i>
<i>Day-time: 0700-1900 hrs on normal weekday</i>	<i>30</i>	<i>L_{eq}, L₁₀, L₉₀</i>	<i>Once per month</i>

5.4 Monitoring Locations

One Noise monitoring was conducted at the noise monitoring location, TKO-N1 as shown in Figure 2 during the reporting period. Table 5.3 describes the location of the monitoring station.

Table 5.3 Noise Monitoring Location

<i>Monitoring station</i>	<i>Location</i>	<i>Type of Measurement</i>
<i>TKO-N1</i>	<i>Outside site Egress along Wan Po Road</i>	<i>Free Field</i>

5.5 Monitoring Procedures and Calibration Details

Operation/Analysis Procedures

- The Sound Level Meter was set on a tripod at a height of 1.2m above the ground.
- For free field measurement, the meter was positioned away from any nearby reflective surfaces.
- The battery condition was checked to ensure the correct functioning of the meter.
- Parameters such as frequency weighting, the time weighting and the measurement time were set as follows:
 - *Frequency weighting: A*
 - *Time weighting : Fast*
 - *Time measurement : 30 mins*
- Prior to and after each noise measurement, the meter was calibrated using a Calibrator for 94 dB at 1000HZ. If the difference in the calibration level before and after measurement was more than 1dB, the measurement would be considered invalid and repeat measurement would be required after re-calibration or repair of the equipment.
- The wind speed was frequently checked with a portable wind meter.
- During the monitoring period, the Leq, L10 and L90 were recorded. In addition, site conditions and noise sources were recorded on a standard record sheet.
- Correction factor of +3dB(A) should be made to the free Field measurements.
- Noise monitoring would be cancelled in the presence of fog, rain, wind with a steady speed exceeding 5m/s, or wind gusts exceeding 10m/s.

Maintenance and Calibration

- The microphone head of the sound level meter and calibrator are cleaned with soft cloth in quarterly intervals.
- The meter is sent to the supplier or HOKLAS laboratory to check and calibrated in yearly intervals.

5.6 Action and Limit Levels

The Action and Limit levels for noise levels derived as illustrated in Table 5.4.

Table 5.4 Action and Limit Levels for noise monitoring

<i>Time Period</i>	<i>Action</i>	<i>Limit</i>
0700-1900 hrs on normal weekdays	When one documented complaint is received	75 dB(A)

5.7 Event-Action Plans

Please refer to the Appendix F for details.

5.8 Results and Observation

5.8.1 Results

Only Day-time noise monitoring was carried out at monitoring station TKO-N1 in this reporting period. The detail of the noise monitoring is provided in Appendix C2. Graphical presentation of the monitoring result for the reporting period is shown in Appendix C3.

Since no documented complaints on noise issue were received in this reporting period, no Action Level exceedance was recorded. Besides, no exceedance in Limit Level was recorded according to the result from Day-time monitoring.

5.8.2 Observation

The major noise source during the monitoring event was the dump truck traffic and crushing plant.

6.0 MARINE WATER QUALITY MONITORING

6.1 Monitoring Requirements

In accordance with the EM&A Manual, impact marine water quality monitoring was conducted three days per week. Measurements were taken at both mid-flood and mid-ebb tides at three depths (i.e. 1m below surface, mid depth and 1m from seabed) at Control Station, C1 and Monitoring Station, M4.

6.2 Monitoring Locations

For the Reclamation Project, there were 4 Designated Monitoring Stations and 2 Designated Control Stations specified in the EM&A Manual. Upon the completion of the monitoring programme under Stage 2 reclamation works, the ET started monitoring events at the impact station M4 and the control station C1 from 18 May 2004 onwards.

Figure 1 shows the location of the marine water quality monitoring stations. Table 6.1 describes the locations of the monitoring stations in the reporting period.

Table 6.1 Locations of Marine Water Monitoring Stations

<i>Station Description</i>	<i>Code</i>	<i>HK Metric Grid E</i>	<i>HK Metric Grid N</i>
<i>Control Station (Ebb tide)</i>	<i>TKO-C1</i>	<i>844 740.208</i>	<i>815 371.502</i>
<i>Monitoring Station, Tung Lung Chau Fish Culture Zone</i>	<i>TKO-M4</i>	<i>847 741.029</i>	<i>812 977.878</i>

According to Environmental Permit (Permit no.:EP-134/2002/N) Condition 3.2, water quality survey/monitoring shall be conducted at control station C1a, monitoring stations M4a and M5 for the period from two weeks before commencement of operation of the additional 5 barging points to 4 weeks after cessation of their operation. The water quality survey/monitoring frequency and parameters at stations C1a, M4a and M5 shall be same as the requirements set out in the EM&A Manual and the monitoring results shall be incorporated in the monthly EM&A reports.

Due to "Hong Kong International Airport, Three Runway System Project Contract 3206 – Main Reclamation Works "(3RS project) operation of the additional barging point at TKO Area 137, the ET started monitoring events at the impact station M4a, M5 and the control station C1a from 14 May 2018 onwards.

Figure 4 shows the location of water control station C1a and water monitoring station M4a and M5.

Table 6.2 describes the locations of the additional marine water monitoring stations

Table 6.2 Locations of Additional Marine Water Monitoring Stations (3RS project)

<i>Station Description</i>	<i>Code</i>	<i>HK Metric Grid E</i>	<i>HK Metric Grid N</i>
<i>Control Station (Ebb tide)</i>	<i>C1a</i>	<i>845647</i>	<i>814146</i>
<i>Impact Monitoring Station</i>	<i>M4a</i>	<i>845922</i>	<i>813973</i>
	<i>M5</i>	<i>847005</i>	<i>813678</i>

6.3 Monitoring Parameters

Monitoring of the marine water quality parameters are listed in Table 6.3.

Table 6.3 Marine Water Quality Monitoring Parameters

<i>In-situ measurement</i>	<i>Laboratory analysis</i>
<i>Depth (m)</i>	<i>Suspended solids (mg/L)</i>
<i>Temperature (°C)</i>	
<i>Dissolved Oxygen (mg/L and % saturation)</i>	
<i>Turbidity (NTU)</i>	
<i>Salinity (ppt)</i>	

6.4 Monitoring Frequency

The monitoring frequency of the marine water monitoring is summarized in Table 6.4.

Table 6.4 Monitoring frequency of the marine water

<i>Parameter</i>	<i>Frequency</i>	<i>No. of Location</i>	<i>No. of Depths</i>
<i>Temperature</i>	<i>3 days/week, 2 tides/day</i>	<i>2</i>	<i>3 (Surface, mid-depth & bottom)</i>
<i>Salinity</i>		<i>(TKO-C1 and TKO-M4)</i>	
<i>Dissolved Oxygen (DO)</i>		<i>and</i>	
<i>Turbidity</i>		<i>3</i>	
<i>Suspended solids (SS)</i>		<i>(C1a, M4a and M5)</i>	

6.5 Monitoring Methodology and Equipment Used

For Location of the monitoring stations

Global Positioning System (GPS)

A hand-held digital GPS was used to identify the designated monitoring stations prior to water sampling.

For Water Depth measurement

Echo Sounder

A portable, battery-operated echo sounder was used for the determination of water depth at each designated monitoring station.

For In-situ Water Quality Measurement

All in-situ monitoring instruments were checked, calibrated and certified by a laboratory accredited under HOKLAS or any other international accreditation scheme before use, and subsequently re-calibrated at 3 monthly intervals or sometimes longer throughout all stages of the water quality monitoring.

Dissolved Oxygen, Salinity, Turbidity and Temperature Measuring Equipment

A portable, weatherproof multiparameter water quality meter (YSI Pro DSS) which complete with cable, sensor and DC power source were used for measuring DO, turbidity, salinity, and temperature:

- a dissolved oxygen level in the range of 0 to 50 mg/L and 0-500 % saturation;
- a turbidity in range 0-4000 NTU;
- a salinity in range 0-70 ppt;
- a temperature of -5-70 degree Celsius

A membrane electrode with automatic temperature compensation complete with a cable was installed.

For Water Sampling and Sample Analysis

In-situ monitoring was carried out at three depths: 1 meter below water surface, at mid-depth and 1 meter above the seabed. At each sampling depth, duplicate readings of dissolved oxygen content and turbidity were taken. The probes were drop into water, two consecutive measurements of dissolved oxygen (DO), dissolved oxygen saturation (DOS), turbidity and salinity were taken. The difference between the two readings of each set was more than 25% of the value of the first reading while a third measurement would be conducted to ensure data precision.

Water Sampler

A water sampler comprising a transparent PVC cylinder, with a capacity of not less than 2 liters, was lowered into the water body at the predetermined depth. The both opening ends of the sampler were then closed accordingly by dead weight and water samples were collected.

Water Container

The sample container, made by high-density polythene, was rinsed with a portion of the water sample. The water sample was then transferred to the container, labelled with a unique sample ID and sealed with a screw cap. The water samples were stored in a cool box maintained at 4°C. The water samples were then delivered to a local HOKLAS-accredited laboratory (Environmental Laboratory, ETS-Testconsult Ltd, HOKLAS Registration No. 022) on the same day for analysis.

The summary of testing method of testing parameter as recommended by EIA or required by EPD, with the QA/QC results in accordance with the requirement of HOKLAS or international accredited scheme is shown in Table 6.5.

Table 6.5 Summary of testing procedures

<i>Laboratory Analysis</i>	<i>Testing Procedure</i>	<i>Detection Limit</i>
<i>Total suspended solids</i>	<i>In house method based on APHA 19th ed 2540D</i>	<i>1.0 mg/L</i>

In-situ measurement

All in-situ monitoring instruments were checked, calibrated and certified by a laboratory accredited under HOKLAS or any other international accreditation scheme before use. Responses of sensors and electrodes were checked with certified standard solutions before each use. The DO sensor was calibrated by wet bulb method and a zero check in distilled water was performed with the turbidity and salinity sensor before the start of measurement.

At each measurement/sampling depth, two consecutive measurements of dissolved oxygen (DO), dissolved oxygen saturation (DOS), turbidity and salinity were taken. For DO, DOS, Turbidity and Salinity, measurements were conducted three days per week at both mid-ebb and mid-flood tides at three depths (i.e. 1m below surface, mid depth and 1m from seabed). The duplicate measurements were averaged if the difference was not greater than 25%. If the difference is greater than 25%, repeat measurement will be required to be carried out.

Table 6.6 shows the equipment used for in-situ monitoring of water quality. The calibration certificates are attached in Appendix D1.

Table 6.6 Details of Marine Water Quality Monitoring Equipment (In-site measurement)

Parameter	Model	Date of Calibration	Due Date	Equipment No.
Coordinate of Monitoring stations	Garmin eTrex 10	-----	-----	ET/EW/005/09
Dissolved Oxygen (Saturation), Temperature, Salinity, Turbidity	YSI Pro DSS Multiparameter Water Quality Meter	27/10/22 & 25/01/23	26/01/23 & 24/04/23	ET/EW/008/011*
Water Depth	Speedtech SM-5	-----	-----	ET/EW/002/08

Remark:(*) indicates the instrument should be calibrated on use.

6.6 Action and Limit Level

The water quality criteria, namely Action and Limit (A/L) levels are presented in the table below.

Table 6.7 Water Quality Action and Limit Levels

Parameter	Action Level	Limit Level
DO (mg/L)	<u>Surface & Middle</u> <5.45 mg/L (5%-ile of baseline data) <u>Bottom</u> <4.72 mg/L (5%-ile of baseline data)	<u>Surface & Middle</u> <5.10 mg/L (1%-ile of baseline data) <u>Bottom</u> <2.00 mg/L
SS (mg/L) (Depth-averaged)	>6.74 mg/L (95%-ile of baseline data) or >120% of the upstream control station's SS at the same tide on the same day	>7.67 mg/L (99%-ile of baseline data) or >130% of the upstream control station's SS at the same tide on the same day
Turbidity (NTU) (Depth-averaged)	>4.28 NTU (95%-ile of baseline data) or >120% of the upstream control station's turbidity at the same tide on the same day	>4.58 NTU (99%-ile of baseline data) or >130% of the upstream control station's turbidity at the same tide on the same day

The water quality Action and Limit Levels (3RS project) are presented in the table below.

Table 6.8 Water Quality Action and Limit Levels (3RS project)

Parameter	Action Level	Limit Level
DO (mg/L)	<u>Surface & Middle</u> <5.5 mg/L <u>Bottom</u> <5.2 mg/L	<u>Surface & Middle</u> <4.00 mg/L (1%-ile of baseline data) <u>Bottom</u> <2.00 mg/L
SS (mg/L) (Depth-averaged)	>4.9 mg/L or >120% of the upstream control station's SS at the same tide on the same day	>5.2 mg/L or >130% of the upstream control station's SS at the same tide on the same day
Turbidity (NTU) (Depth-averaged)	>3.9NTU or >120% of the upstream control station's turbidity at the same tide on the same day	>4.2 NTU or >130% of the upstream control station's turbidity at the same tide on the same day

6.7 Event and Action Plan

Please refer to the Appendix F for details.

6.8 Monitoring Duration in this reporting period

Below is the time schedule for the marine water quality monitoring events that were conducted in this reporting period:

Table 6.9 Time Schedule of Impact Marine Water Quality Monitoring

January 2023						
Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
1	2	3	4	5	6	7
8	9	10	11	12	13	14
15	16	17	18	19	20	21
22	23	24	25	26	27	28
29	30	31				

Remark: (▼) = Marine water quality monitoring carried out by ET.

6.9 Marine Water Quality Monitoring Results

The impact water quality measurement results are detailed in Appendix D2. Appendix D3 presents the water quality monitoring data and graphical presentations of monitoring results. The summary of marine water quality exceedances is shown in Table 6.10.

Table 6.10 Summary of Impact Marine Water Quality Exceedances

Station	Exceedance Level	DO		Turbidity		SS		Total	
		Flood	Ebb	Flood	Ebb	Flood	Ebb	Flood	Ebb
TKO-M4	Action	0	0	0	0	0	0	0	0
	Limit	0	0	0	0	0	0	0	0

The impact water quality measurement results (3RS project) are detailed in Appendix D4. Appendix D5 presents the water quality monitoring data and graphical presentations of monitoring results. The summary of marine water quality exceedances (3RS project) is shown in Table 6.11.

Table 6.11 Summary of Impact Marine Water Quality Exceedances (3RS project)

Station	Exceedance Level	DO		Turbidity		SS		Total	
		Flood	Ebb	Flood	Ebb	Flood	Ebb	Flood	Ebb
M4a	Action	0	0	0	0	0	0	0	0
	Limit	0	0	0	0	0	0	0	0
M5	Action	0	0	0	0	0	0	0	0
	Limit	0	0	0	0	0	0	0	0

According to the summary of marine water monitoring results, no exceedance of Action and limit levels was recorded for this reporting period.

7.0 ENVIRONMENTAL AUDIT

7.1 Weekly ET Site Inspections and EPD's Site Inspection

7.1.1 Weekly ET Site Inspections

Weekly ET site inspections were carried out by ET to monitor the timely implementation of proper environmental pollution control and mitigation measures for the Project. In this reporting period, five weekly site inspections were conducted (04, 11, 18, 27 and 30 January 2023). Table 7.1 presents the key findings of weekly ET site inspection in this reporting period.

Table 7.1 Key Findings of Weekly ET Site Audits in this reporting period

<i>Date</i>	<i>Key Findings</i>	<i>Action(s) Taken recommended by ET</i>	<i>Action(s) Taken by the Contractor during the ET weekly site audit</i>	<i>Rectification Status by ET</i>
04 January 2023	<i>No defective work or observation was recorded during the weekly ET site inspection</i>			
11 January 2023	<i>No defective work or observation was recorded during the weekly ET site inspection</i>			
18 January 2023	<i>No defective work or observation was recorded during the weekly ET site inspection</i>			
27 January 2023	<i>No defective work or observation was recorded during the weekly ET site inspection</i>			
30 January 2023	<i>No defective work or observation was recorded during the weekly ET site inspection</i>			

7.1.2 EPD's Site Inspection

No EPD's site inspection was carried out in this reporting period.

7.2 Review of Environmental Monitoring Procedures

The monitoring works conducted by the Environmental Team were inspected regularly. The observations for the monitoring works were recorded and summarized as follows:

Air Quality Monitoring

- The monitoring team recorded the observations around the monitoring stations within and outside of the site.
- The monitoring team recorded the temperature, air pressure and general weather condition on the monitoring day.

Noise Monitoring

- The monitoring team recorded the observations around the monitoring station, which might affect the results.
- Major noise sources were identified and recorded.

Water Quality Monitoring

- The monitoring team recorded the observations around the monitoring stations, which might affect the results.

7.3 Assessment of Environmental Monitoring Results

All monitoring results were audited against the Action and Limit levels and any exceedance would be validated.

No exceedance was recorded in water quality, air quality and noise monitoring in this reporting period.

The monitoring results in this reporting period were comparable with those of baseline month. Detailed discussions were given in Section 4, 5 and 6 of this Report.

7.4 Advice on the Solid and Liquid Waste Management Status

The Contractor usually disposed of non-inert waste, including general refuse and materials segregated from the existing stockpiles, to SENT landfill. Table 7.2 summarizes data on offsite waste disposal in this reporting period and the Monthly Summary Waste Flow Table is shown in Appendix K.

Table 7.2 Actual amounts of Waste generated in this reporting period

Waste Type	Actual Amount	Disposal Locations
Public Fill ('000m ³)	0	TKO 137 Fill Bank
C&D Waste ('000kg)	67.28	SENT Landfill / Refuse Collection Point
Chemical Waste (kg/L)	0 (L)	Collected by licensed collector

The Contractor should provide sufficient preventive measures during equipment maintenance works so as to avoid oil leakage on the ground. In the event of any oil leakage, the Contractor should clean up the polluted soil and handle all the materials used for this cleaning works as chemical waste.

Concrete bunding has erected outside the CEDD combined reception office and near the automatic wheel washing facilities for storing generator sets and oil drums. The drain outlet of all the bunded areas should be plugged properly. Besides, pre-cast drip trays were provided for oil drums at several areas, such as workshop and chemical storage area. The Contractor should collect and dispose of any stagnant water accumulated in the concrete bunding and drip trays and handle them as chemical waste.

The Contractor should use suitable containers with proper labels to store chemical wastes in accordance with Code of Practice on the Packaging, Labeling and Storage of Chemical Waste. The Contractor should also advise their workers of the proper procedures in handling the chemical waste. All the trip tickets for chemical waste disposal were properly kept in the site office.

The Contractor was reminded to increase the frequency of inspection and cleaning of the site drainage system, including permanent desilting chambers, desilting facilities, oil interceptor bypass tank, DP3 and DP4 and all the trapezoidal channels. Moreover, the Contractor should apply approved pesticides in the stagnant water ponds.

All the runoff from the parking area should be pumped to the desilting facilities and oil interceptors to remove suspended solids and oil & grease prior to discharge.

8.0 Status of Environmental Licensing and Permitting

All permits/licenses valid in this reporting period are summarized in Table 8.1.

Table 8.1 Summary of environmental licensing and permit status

Description	Permit No.	Valid Period		Section
		From	To	
Environmental Permit	EP-134/2002/O	26/11/21	01/01/2027	<ul style="list-style-type: none"> ▪ Site clearance ▪ Construction of a temporary storm water system ▪ Stockpiling of 6 million m³ of public fill ▪ Setting up two barging points for transporting the stockpiled public fill by barges ▪ Setting up a temporary barging point at the existing Explosive Off-loading Barging Point for the month of May 2004 to December 2004 for transporting the stockpiled public fill by barge ▪ Construction of operation of a construction and Demolition Material Sorting Facility (C&DMSF) ▪ Setting up a Construction and Demolition Material Crushing Facility at the TKO Basin ▪ Remove the temporary fill bank
Chemical Waste Registration	5213-839-C3750-04	19/04/17	---	<ul style="list-style-type: none"> ▪ Spent battery cell containing heavy metals and spent lubricating oil
Effluent Discharge License	WT00041169-2022	06/06/22	30/06/27	<ul style="list-style-type: none"> ▪ Effluent, Surface Run-off, and all other wastewater discharges from screen and sedimentation tank
Marine Dumping Permit	EP/MD/22-132	25/05/22	30/08/22	<ul style="list-style-type: none"> ▪ Approval for dumping 499,999 tons (approximately equal to 277,777 cu.m. bulked quantity) of Public Fill (Reclamation Materials) from Tseung Kwan O Area 137 Fill Bank and Tuen Mun Area 38 Fill Bank to designated dumping area at Guanghaiwan of Taishan

Billing Account for Waste Disposal	7042821	22/05/17	End of project	---
Notification Pursuant to Section 3(3) of the Air Pollution Control (Construction Dust)	475209	12/04/17	End of project	---

9.0 ENVIRONMENTAL NON-CONFORMANCE

9.1 Summary of air quality, noise and marine water quality

No Action and Limit level exceedance of 1-hour and 24-hr TSP monitoring was recorded in this reporting period.

Since no documented complaints on noise issue were received in this reporting period, no Action Level exceedance was recorded. Besides, no exceedance in Limit Level was recorded according to the result from Day-time monitoring.

According to the summary of marine water monitoring results, no exceedance of Action and Limit levels was recorded for this reporting period.

9.2 Summary of Environmental Complaints

No complaint was received in this reporting period.

9.3 Summary of Notification of Summons and successful Prosecution

There was no notification of summons and successful prosecution respect to environmental issues registered in this reporting period.

10.0 IMPLEMENTATION STATUS

10.1 Implementation Status of Environmental Mitigation Measures

An updated summary of the Environmental Mitigation Implementation Schedule (EMIS) is presented in Appendix I. Most of the necessary mitigation measures were implemented properly. Any deficiencies were noted in the remarks of the schedule.

10.2 Implementation Status of Event and Action Plan

Since no exceedance of Action and Limit level of air quality, noise and marine water monitoring results was recorded for this reporting period, no further action was required.

10.3 Implementation Status of Environmental Complaint, Notifications of Summons and Successful Prosecutions Handling

A summary of environmental complaints, notifications of summons and successful prosecutions was given in Table 10.1 and further details of the complaint could be found in the Complaint Log (Appendix N).

Table 10.1 Summary of Environmental Complaints and Prosecutions

Complaints logged		Summons served		Successful prosecution received	
January 2023	Cumulative	January 2023	Cumulative	January 2023	Cumulative
0	18	0	0	0	0

11.0 CONCLUSIONS AND RECOMMENDATIONS

Conclusions

Impact monitoring of air quality, noise and water quality were carried out at designated locations in accordance with the EM&A Manual in this reporting period.

No Action and Limit level exceedance of 1-hour and 24-hr TSP monitoring was recorded in this reporting period.

Since no documented complaints on noise issue were received in this reporting period, no Action Level exceedance was recorded. Besides, no exceedance in Limit Level was recorded according to the result from Day-time monitoring.

According to the summary of marine water monitoring results, no exceedance of Action and Limit levels was recorded for this reporting period.

No complaint, prosecutions and notifications of summons were received in this reporting period.

According to the ET weekly site inspections carried out in this reporting period, the Contractor generally implemented sufficient dust mitigation measures, including operation of the mist spraying systems, provision of automatic water sprinklers at the crushing plants and automatic wheel washing facilities, dampening of haul roads and stockpiling areas.

Recommendations

According to the environmental site inspections performed in the reporting period, the following recommendations were provided:

Air Quality

- Ensure the frequency of water spraying on haul roads, crushing plant, unloading areas and stockpiles to be sufficient to suppress the dust sources;
- Provide proper maintenance for the powered mechanical equipment and barges to avoid emission of dark smoke;
- Provide water spraying onto the truckloads during inspection of fill material;
- Provide continuously water spraying system for crushing plant including receiving point and unloading point;
- Provide enclosed conveyor belt for transporting the crushed material directly to the unloading point
- Provide dust screen fenced for crushing plant, and the receiving point of crushing facility would be situated inside an enclosure with one side opening for vehicular access;
- Conduct road sweeping on all paved haul roads and public roads especially outside and near the site egress by the road sweeper. Undertake water spraying on stockpiling area by water bowser;
- Erect adequate speed limit signs to advise the truck drivers of the speed limit;
- Operate mist spraying systems and automatic water sprinklers in the Fill Bank;
- Implement the dust mitigation measures for the site activities;
- Designate proper haul roads to ensure effective water spraying; and
- Ensure all vehicles to be washed before leaving the site egress by provision, operation and maintenance of automatic wheel washing facilities.

Noise

- Conduct noisy activities at a farther location from the NSRs.
- Proper schedule of noisy operation and use of quiet machineries on site.

Water Quality

- Maintain the drainage system, including the trapezoidal channels, permanent desilting chambers, regularly;
- Operate and maintain the silt curtains regularly;
- Operate the cleaning vessel within the TKO Basin regularly;
- Clean up the fill material on the concrete pavement at BHA frequently; and
- Remove the stagnant water or provide approved pesticides for the stagnant water in the permanent desilting chambers, if any.

Landscape and Visual

- Provide hydroseeding on the exposed slopes, on which the final profile has been formed;

- Erect all the site hoarding/chaining fences in accordance with agreed design at proper location;
- Maintain the hydroseeded slopes in accordance with the Landscape Plan.

Chemical and Waste Management

- Remove waste materials from the site to avoid accumulation regularly;
- Handle and store chemical wastes properly;
- Remove unwanted material in the existing stockpiles and avoid further dumping of such material;
- Provide and maintain sufficient drip trays for diesel drums, chemical containers, chemical waste storage drums and diesel operated generator set;
- Maintain mesh screen on top of the additional drainage to avoid improper dumping of rubbish;
- Maintain good housekeeping at the workshop area;
- Ensure sufficient tarpaulin sheets are provided to cover drip trays; and
- Avoid soil being polluted during oil filling and equipment maintenance; hence, properly remove and store the contaminated soil, if any

12.0 FUTURE KEY ISSUES

12.1 Work Programme for the Coming Month

1. *Operation of the Public Fill Reception Facilities at Tseung Kwan O Fill Bank (TKOFB);*
2. *Operation of dewatering plant at TKOFB;*
3. *Operation and Maintenance of crushing plants at TKOFB;*
4. *Operation and Maintenance of Artificial Intelligent System for Crushing Plant at TKOFB;*
5. *Operation of the Integrated Public Fill Reception at TKOFB;*
6. *Operation and Maintenance of the Wash House at TKOFB;*
7. *Personnel Position Tracking and Proximity Detection System of Moving Plant at TKOFB;*
8. *Modification and Operation a Digital Works Supervision System (DWSS) for TKOFB;*
9. *Operation and maintenance of Wheel Washing Bays and Facilities at TKOFB;*
10. *Maintenance of the Drainage Systems at TKOFB;*
11. *Construction of Gabion Wall at TKOFB;*
12. *Upgrade of Integrated Public Fill Reception Platform at TKOFB*
13. *Trial Production of Blanket Layer Material Recycled from Public Fill at TKOFB*
14. *Upgrading and Repairing Works for Lightning Protection System at TKOFB*
15. *Replacement of Steel Decking near Main Entrance at TKOFB*
16. *Replacement of concrete pavement at TKOFB*
17. *Trial sorting of 37.5mm products by screen machine and testing*
18. *Modification works of existing containers for trial operation for receiving slurry at TKOFB*
19. *Implementation of C Easy system at TKOFB (Phase 1)*

12.2 Key Issues for the Coming Month

Key issues to be considered in the coming month include:

- *Chemical and waste management;*
- *Treatment of runoff and wastewater prior to discharge;*
- *Dust generated from loading and unloading activities;*
- *Dust generated from dump trucks traffic;*
- *Regular checking of the drainage system;*
- *Flood prevention; and*
- *Noise from operation of the crushing plant.*

Mitigation measures to be required in the coming month:

Air Quality Impact

- To provide adequate water spraying on haul roads and working platform;
- To operate and maintain automatic wheel washing facilities properly;
- To dampen the fill material prior to unloading or movement;
- To provide road sweeping on haul road near site egress and public roads outside site egress;
- To ensure implementation of the dust mitigation measures for the site activities;
- To maintain proper operation of the mist spraying system;
- To provide proper maintenance for vehicles and machines on site; and
- To investigate any other dust sources around the air sensitive receivers

Noise

- To switch off equipment if not in use;
- To operate silent equipment;
- To identify the noise sources inside and outside of the site;
- To follow up any exceedance caused by the Fill Bank operation; and
- To re-schedule the work activities in the event of valid noise exceedance.

Water Quality Impact

- To maintain the drainage system in the Fill Bank;
- To ensure the cleanliness of oil interceptor bypass tanks and all the drainage channels;
- To maintain the existing silt trap to ensure good efficiency of wheel wash facilities;
- To repair, inspect and maintain the silt curtains regularly;
- To provide covers for the drip trays to avoid stagnant water pond due to rainfall;
- To deploy a cleaning vessel to remove floating rubbish in the TKO Basin;
- To clean up the concrete paved area at Portion I every night to avoid fill materials from being washed into the sea;
- To avoid any stagnant water or provide insecticide to avoid mosquito breeding in the Fill Bank.
- To prevent untreated wastewater directly discharge into nullahs; and
- To provide desilting facilities such as granular rock filter and geotextile filter at nullah.

Chemical and Waste Management

- To remove waste from the site regularly;
- To properly store and handle chemical wastes on site;
- To implement trip ticket system for all the imported public fill and general refuse disposal;
- To provide and manage sufficiently sized drip trays for diesel drums or chemical containers;
- To remove existing unwanted material in the stockpiles and avoid improper disposal at the Fill Bank through inspection of imported truckloads;
- To maintain proper housekeeping at the workshop area;
- To remove the oil stains in the event of leakage and handle all materials using for this cleaning works as chemical waste;
- To maintain mesh screen on top of the additional drainage, DP3 opening to avoid improper dumping of rubbish into this channel; and
- To identify C&D material by packaging, labeling, storage, transportation and disposal in accordance with statutory regulations.


12.3 Monitoring Schedule for the Coming Month

The proposed EM&A program of the coming month and predicted tide schedule from the Hong Kong Observatory are attached in Appendix L.

- END OF REPORT -

Appendix A

Project Organization Chart

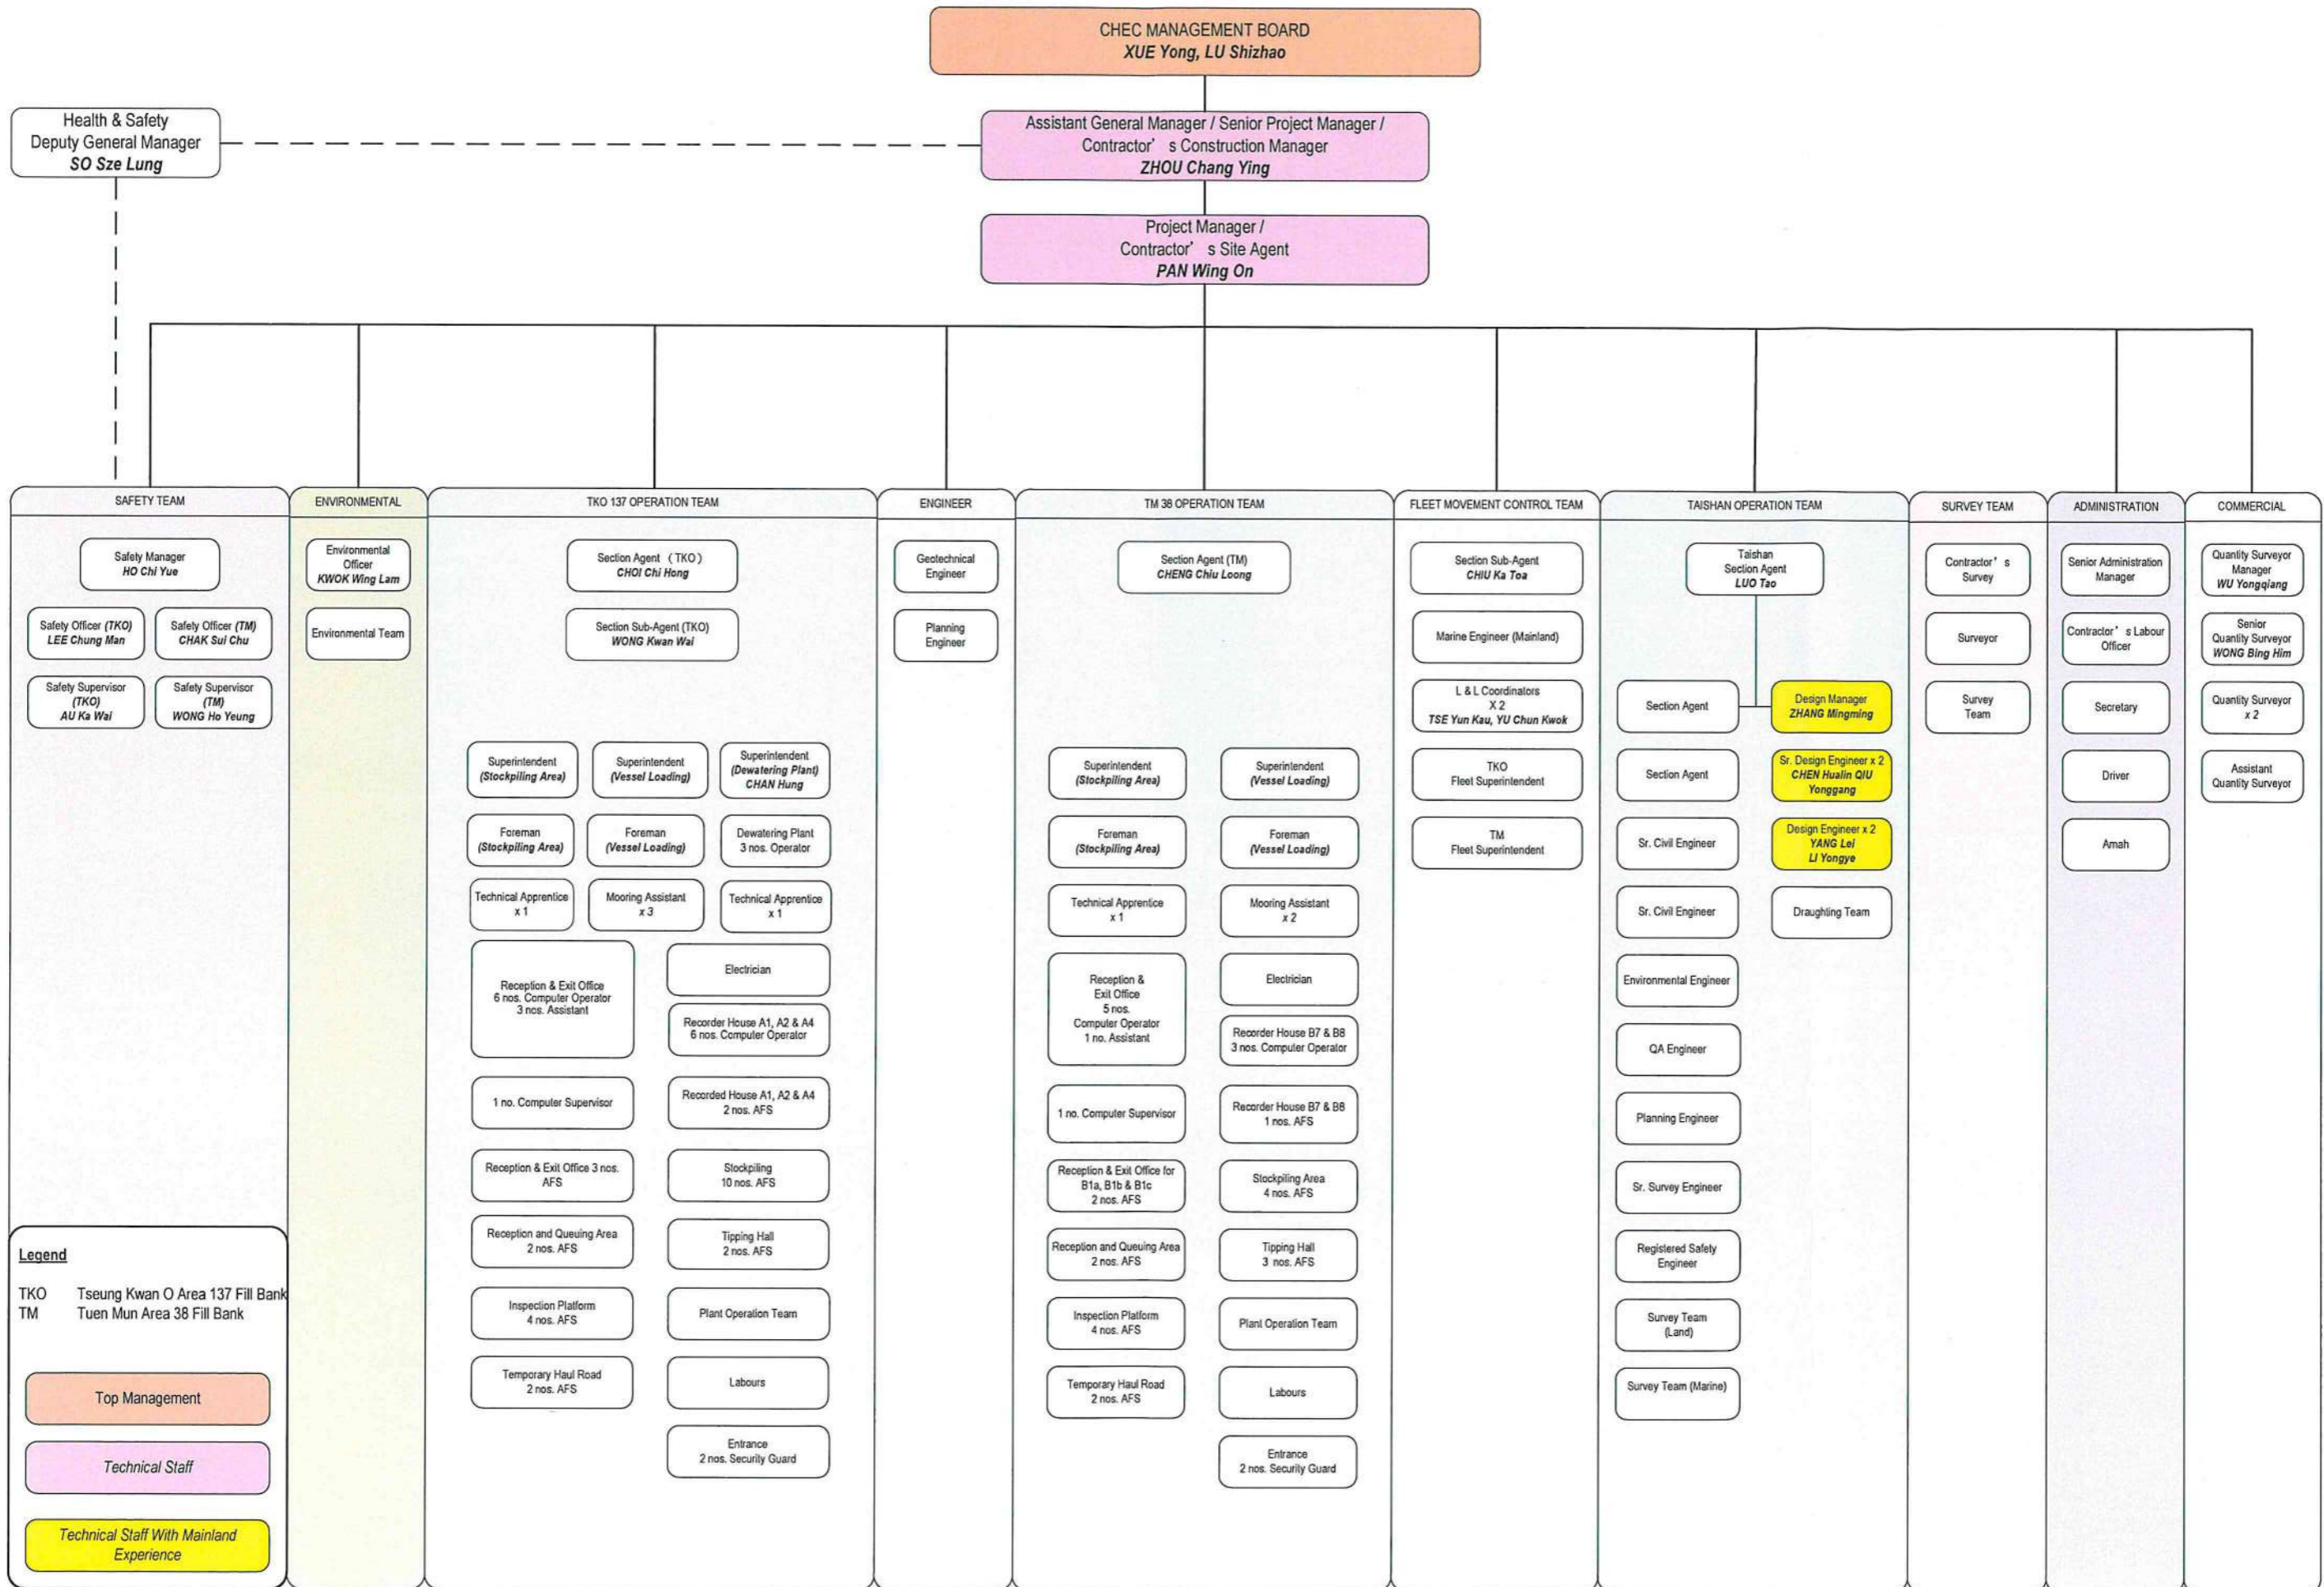

Appendix B1

Calibration Certificates for Impact Air Quality Monitoring Equipment



TEST REPORT

Calibration Report
of
High Volume Air Sampler


Manufacturer : Graseby 105 Date of Calibration : 30 December 2022

Serial No. : 9795 (ET / EA / 003 / 18) Calibration Due Date : 28 February 2023

Method : Five-point calibration by using standard calibration kit Tisch TE-5025A refer to the Operations Manual

Results	Flow recorder reading (cfm)	49	42	35	30	23
	Qstd (Actual flow rate, m ³ /min)	1.69	1.56	1.26	1.15	0.90
	Pressure : 768.81 mm Hg	Temp. : 288 K				

Sampler 9795 Calibration Curve
Site: Tseung Kwan O 137 (TKO-A1)

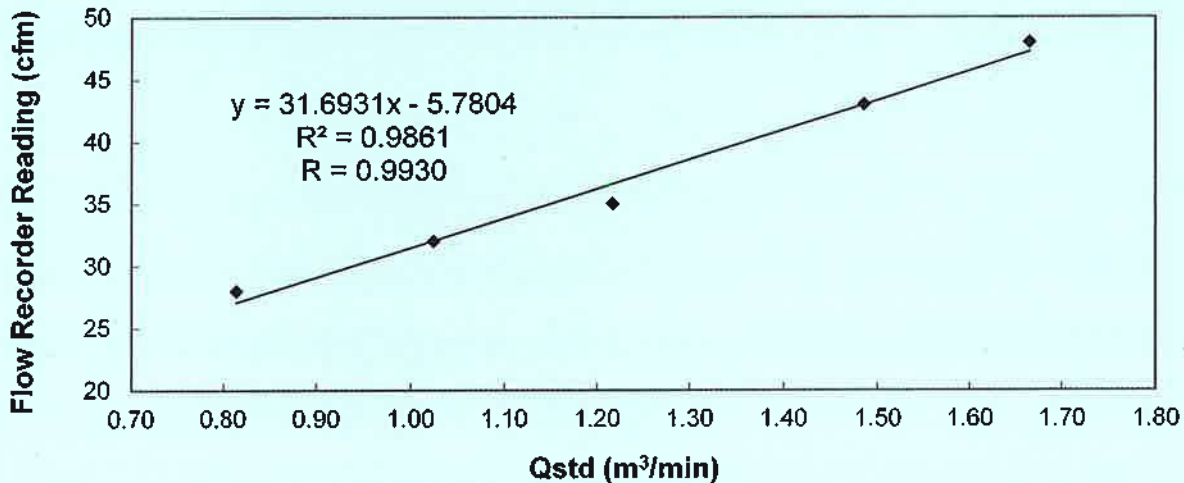

Acceptance Criteria : Correlation coefficient (r) of the calibration curve greater than 0.990 after a 5-point calibration

The high volume sampler complies* / ~~does not comply*~~ with the specified requirements and is deemed acceptable* / unacceptable* for use.

Calibrated by : MAK, Kei Wai
MAK, Kei Wai
(Assistant Supervisor)

Checked by : LAU, Chi Leung
LAU, Chi Leung
(Environmental Team Leader)




TEST REPORT

Calibration Report
of
High Volume Air Sampler

Manufacturer : Andersen G1051 Date of Calibration : 30 December 2022
Serial No. : 1176 (ET / EA / 003 / 05) Calibration Due Date : 28 February 2023
Method : Based on Operations Manual for the 5-point calibration using standard calibration kit manufactured by Tisch TE-5025 A

Results	Flow recorder reading (cfm)	55	47	46	35	28
	Qstd (Actual flow rate, m ³ /min)	1.73	1.58	1.47	1.05	0.80
Pressure :		768.81 mm Hg		Temp. :		288 K

Sampler 1176 Calibration Curve
Site: Tseung Kwan O 137 (TKO-A2a)

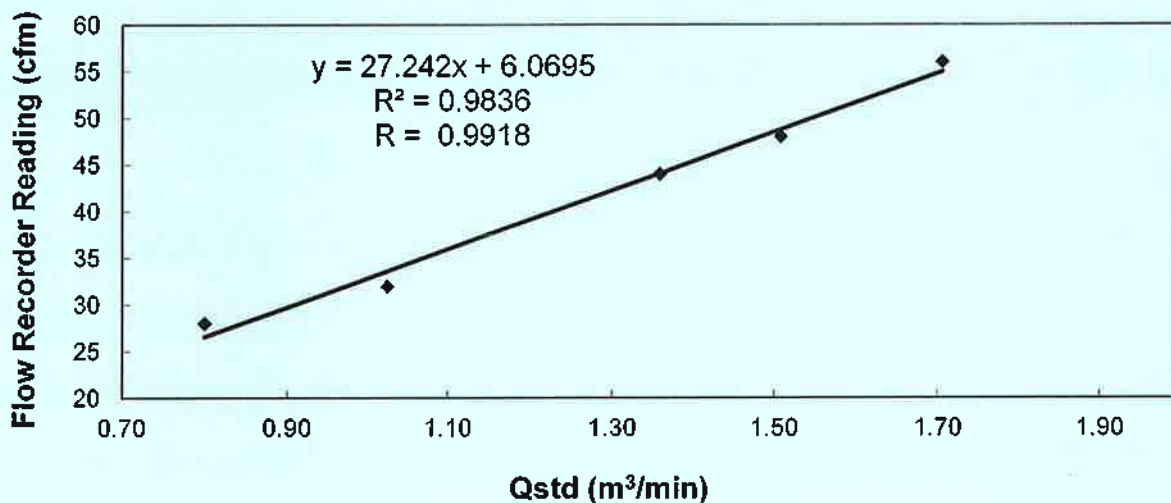

Acceptance Criteria : Correlation coefficient (r) of the calibration curve greater than 0.990 after a 5-point calibration

The high volume sampler complies* / does not comply* with the specified requirements and is deemed acceptable* / unacceptable* for use.

Calibrated by : MAK, Kei Wai
MAK, Kei Wai
(Assistant Supervisor)

Checked by : LAU, Chi Leung
LAU, Chi Leung
(Environmental Team Leader)

- END OF REPORT -

Certificate of Calibration

Calibration Certification Information			
Cal. Date: January 21, 2022	Rootsmeter S/N: 438320	Ta: 295	°K
Operator: Jim Tisch		Pa: 754.1	mm Hg
Calibration Model #: TE-5025A	Calibrator S/N: 3999		

Run	Vol. Init (m3)	Vol. Final (m3)	ΔVol. (m3)	ΔTime (min)	ΔP (mm Hg)	ΔH (in H2O)
1	1	2	1	1.4540	3.2	2.00
2	3	4	1	1.0230	6.4	4.00
3	5	6	1	0.9170	8.0	5.00
4	7	8	1	0.8750	8.9	5.50
5	9	10	1	0.7200	12.9	8.00

Data Tabulation						
Vstd (m3)	Qstd (x-axis)	$\sqrt{\Delta H \left(\frac{Pa}{Pstd} \right) \left(\frac{Tstd}{Ta} \right)}$ (y-axis)	Va	Qa (x-axis)	$\sqrt{\Delta H \left(\frac{Ta}{Pa} \right)}$ (y-axis)	
0.9981	0.6865	1.4159	0.9958	0.6848	0.8845	
0.9939	0.9715	2.0024	0.9915	0.9692	1.2509	
0.9917	1.0815	2.2387	0.9894	1.0789	1.3985	
0.9905	1.1320	2.3480	0.9882	1.1294	1.4668	
0.9852	1.3684	2.8318	0.9829	1.3651	1.7690	
QSTD	m=	2.08075	QA	m=	1.30293	
	b=	-0.01322		b=	-0.00826	
	r=	0.99996		r=	0.99996	

Calculations			
Vstd=	$\Delta Vol \left(\frac{Pa - \Delta P}{Pstd} \right) \left(\frac{Tstd}{Ta} \right)$	Va=	$\Delta Vol \left(\frac{Pa - \Delta P}{Pa} \right)$
Qstd=	Vstd/ΔTime	Qa=	Va/ΔTime
For subsequent flow rate calculations:			
Qstd=	$1/m \left(\left(\sqrt{\Delta H \left(\frac{Pa}{Pstd} \right) \left(\frac{Tstd}{Ta} \right)} \right) - b \right)$	Qa=	$1/m \left(\left(\sqrt{\Delta H \left(\frac{Ta}{Pa} \right)} \right) - b \right)$

Standard Conditions	
Tstd:	298.15 °K
Pstd:	760 mm Hg
Key	
ΔH:	calibrator manometer reading (in H2O)
ΔP:	rootsmeter manometer reading (mm Hg)
Ta:	actual absolute temperature (°K)
Pa:	actual barometric pressure (mm Hg)
b:	intercept
m:	slope

RECALIBRATION
US EPA recommends annual recalibration per 1998 40 Code of Federal Regulations Part 50 to 51, Appendix B to Part 50, Reference Method for the Determination of Suspended Particulate Matter in the Atmosphere, 9.2.17, page 30

Appendix B2

Impact Air Quality Monitoring Results

Summary of 24-hr TSP Monitoring Results



Monitoring Station : TKO-A1

Location : Site Egress

Start		Finish		Elapse Time		Sampling Time (hrs)	Flow Rate (m ³ /min.)		Average (m ³ /min.)	Filter Weight (g)		Conc. (μg/m ³)
Date	Time	Date	Time	Initial	Final		Initial	Final		Initial	Final	
4/1/2023	09:30	5/1/2023	9:30	26375.74	26399.74	24.00	1.2236	1.2236	1.2236	3.0066	3.2233	123
10/1/2023	09:30	11/1/2023	9:30	26402.74	26426.74	24.00	1.2552	1.2552	1.2552	3.0707	3.3201	138
16/1/2023	13:00	17/1/2023	13:00	26429.74	26453.74	24.00	1.2552	1.2552	1.2552	3.0298	3.2485	121
21/1/2023	13:00	22/1/2023	13:00	26456.74	26480.74	24.00	1.2552	1.2552	1.2552	3.0302	3.2905	144
27/1/2023	13:00	28/1/2023	13:00	26483.74	26507.74	24.00	1.2236	1.2236	1.2236	3.0021	3.2611	147

Monitoring Station : TKO-A2a

Location : CREO

Start		Finish		Elapse Time		Sampling Time (hrs)	Flow Rate (m ³ /min.)		Average (m ³ /min.)	Filter Weight (g)		Conc. (μg/m ³)
Date	Time	Date	Time	Initial	Final		Initial	Final		Initial	Final	
4/1/2023	09:35	5/1/2023	9:35	28379.71	28403.71	24.00	0.9519	0.9519	0.9519	3.0001	3.1756	128
10/1/2023	09:35	11/1/2023	9:35	28406.71	28430.71	24.00	0.9519	0.9519	0.9519	3.0697	3.2671	144
16/1/2023	13:10	17/1/2023	13:10	28433.71	28457.71	24.00	0.9886	0.9886	0.9886	2.9890	3.1698	127
21/1/2023	10:10	22/1/2023	10:10	28460.71	28484.71	24.00	0.9519	0.9519	0.9519	3.0289	3.2359	151
27/1/2023	13:10	28/1/2023	13:10	28487.71	28511.71	24.00	0.9886	0.9886	0.9886	3.0509	3.2687	153

Summary of 1-hr TSP Monitoring Results



Monitoring Station : TKO-A1

Location : Site Egress Site Egress

Start		Finish		Elapse Time		Sampling Time (hrs)	Flow Rate (m ³ /min.)		Average (m ³ /min.)	Filter Weight (g)		Conc. (µg/m ³)
Date	Time	Date	Time	Initial	Final		Initial	Final		Initial	Final	
3/1/2023	09:30	3/1/2023	10:30	26374.74	26375.74	1.00	1.2552	1.2552	1.2552	3.0234	3.0418	244
6/1/2023	09:00	6/1/2023	10:00	26399.74	26400.74	1.00	1.2236	1.2236	1.2236	3.0211	3.0381	232
6/1/2023	10:05	6/1/2023	11:05	26400.74	26401.74	1.00	1.2236	1.2236	1.2236	3.0222	3.0393	233
9/1/2023	09:30	9/1/2023	10:30	26401.74	26402.74	1.00	1.2236	1.2236	1.2236	3.0153	3.0329	240
11/1/2023	09:30	11/1/2023	10:30	26426.74	26427.74	1.00	1.1921	1.1921	1.1921	2.9793	2.9960	234
11/1/2023	10:45	11/1/2023	11:45	26427.74	26428.74	1.00	1.1921	1.1921	1.1921	3.0212	3.0377	231
13/1/2023	10:00	13/1/2023	11:00	26428.74	26429.74	1.00	1.1921	1.1921	1.1921	3.0235	3.0415	251
18/1/2023	10:00	18/1/2023	11:00	26453.74	26454.74	1.00	1.2236	1.2236	1.2236	3.0466	3.0639	235
18/1/2023	13:00	18/1/2023	14:00	26454.74	26455.74	1.00	1.2236	1.2236	1.2236	3.0466	3.0636	231
20/1/2023	09:30	20/1/2023	10:30	26455.74	26456.74	1.00	1.2236	1.2236	1.2236	3.0441	3.0597	212
26/1/2023	09:25	26/1/2023	10:25	26480.74	26481.74	1.00	1.2236	1.2236	1.2236	3.0279	3.0448	230
26/1/2023	10:45	26/1/2023	11:45	26481.74	26482.74	1.00	1.2236	1.2236	1.2236	3.0542	3.0709	228
26/1/2023	13:10	26/1/2023	14:10	26482.74	26483.74	1.00	1.2236	1.2236	1.2236	2.9900	3.0072	234
30/1/2023	09:30	30/1/2023	10:30	26507.74	26508.74	1.00	1.2552	1.2552	1.2552	3.0355	3.0518	216
30/1/2023	10:45	30/1/2023	11:45	26508.74	26509.74	1.00	1.2552	1.2552	1.2552	3.0355	3.0521	220

Monitoring Station : TKO-A2a

Location : CREO



東業德勤測試顧問有限公司
ETS-TESTCONSULT LIMITED


Start		Finish		Elapse Time		Sampling Time (hrs)	Flow Rate (m ³ /min.)		Average (m ³ /min.)	Filter Weight (g)		Conc. (µg/m ³)
Date	Time	Date	Time	Initial	Final		Initial	Final		Initial	Final	
3/1/2023	09:35	3/1/2023	10:35	28378.71	28379.71	1.00	0.9886	0.9886	0.9886	3.0214	3.0363	251
6/1/2023	09:10	6/1/2023	10:10	28403.71	28404.71	1.00	0.9886	0.9886	0.9886	3.0215	3.0355	236
6/1/2023	10:15	6/1/2023	11:15	28404.71	28405.71	1.00	0.9886	0.9886	0.9886	3.0074	3.0215	238
9/1/2023	10:35	9/1/2023	11:35	28405.71	28406.71	1.00	0.9519	0.9519	0.9519	3.0108	3.0247	244
11/1/2023	09:35	11/1/2023	10:35	28430.71	28431.71	1.00	0.9519	0.9519	0.9519	2.9900	3.0036	238
11/1/2023	10:35	11/1/2023	11:35	28431.71	28432.71	1.00	0.9519	0.9519	0.9519	3.0410	3.0544	235
13/1/2023	10:10	13/1/2023	11:10	28432.71	28433.71	1.00	0.9519	0.9519	0.9519	3.0280	3.0426	256
18/1/2023	10:10	18/1/2023	11:10	28457.71	28458.71	1.00	0.9519	0.9519	0.9519	3.0377	3.0513	238
18/1/2023	13:10	18/1/2023	14:10	28458.71	28459.71	1.00	0.9519	0.9519	0.9519	3.0377	3.0511	234
20/1/2023	09:35	20/1/2023	10:35	28459.71	28460.71	1.00	0.9519	0.9519	0.9519	3.0186	3.0311	218
26/1/2023	09:30	26/1/2023	10:30	28484.71	28485.71	1.00	0.9519	0.9519	0.9519	2.9920	3.0055	236
26/1/2023	10:50	26/1/2023	11:50	28486.71	28487.71	1.00	0.9519	0.9519	0.9519	3.0688	3.0821	233
26/1/2023	13:15	26/1/2023	14:15	28486.71	28487.71	1.00	0.9519	0.9519	0.9519	3.0169	3.0306	239
30/1/2023	09:35	30/1/2023	10:35	28511.71	28512.71	1.00	1.0620	1.0620	1.0620	3.0225	3.0366	221
30/1/2023	10:50	30/1/2023	11:50	28512.71	28513.71	1.00	1.0620	1.0620	1.0620	3.0225	3.0368	225

Appendix B3


Graphical Plots of Impact Air Quality Monitoring Data



1-hour TSP level at TKO-A1

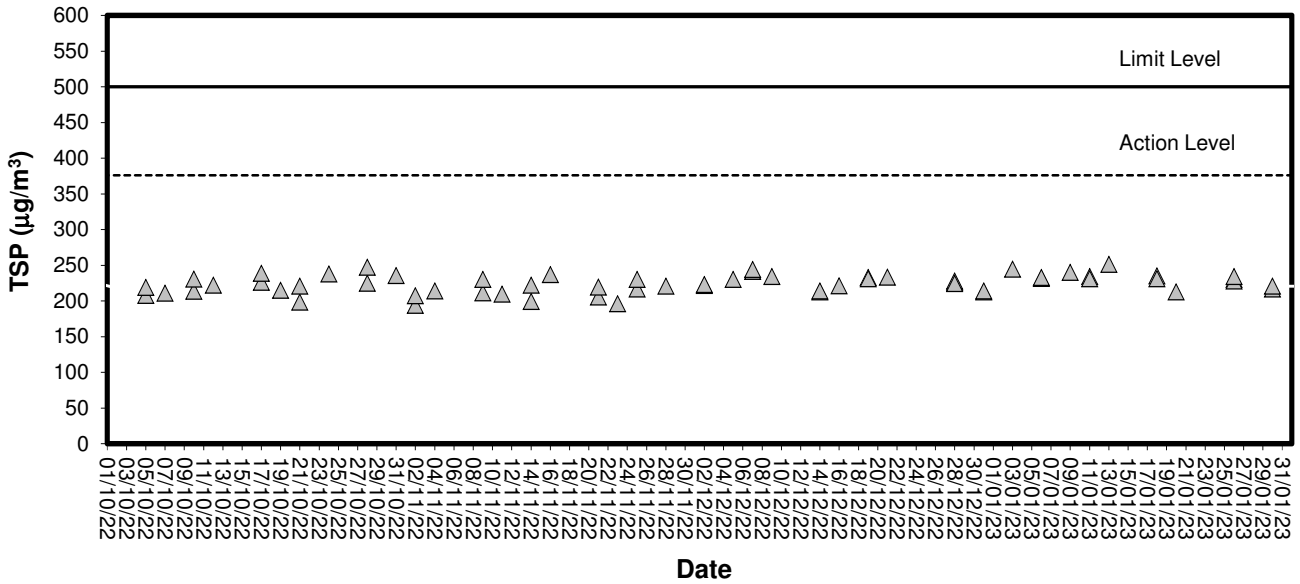


1-hour TSP level at TKO-A2a

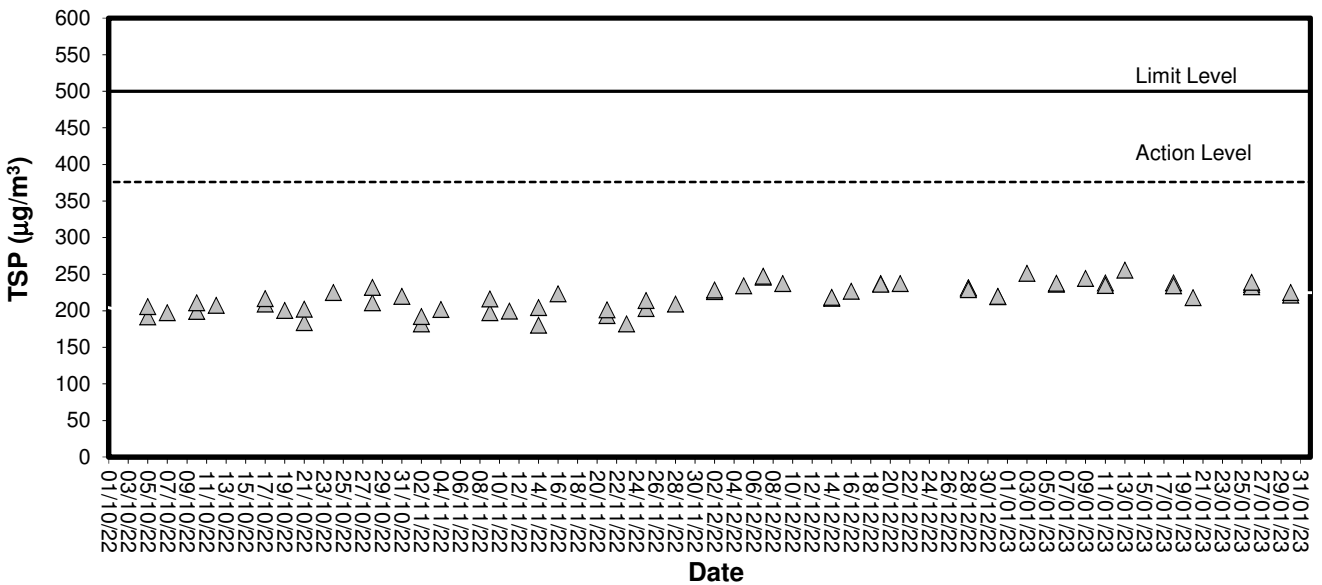




24-hour TSP level at TKO-A1

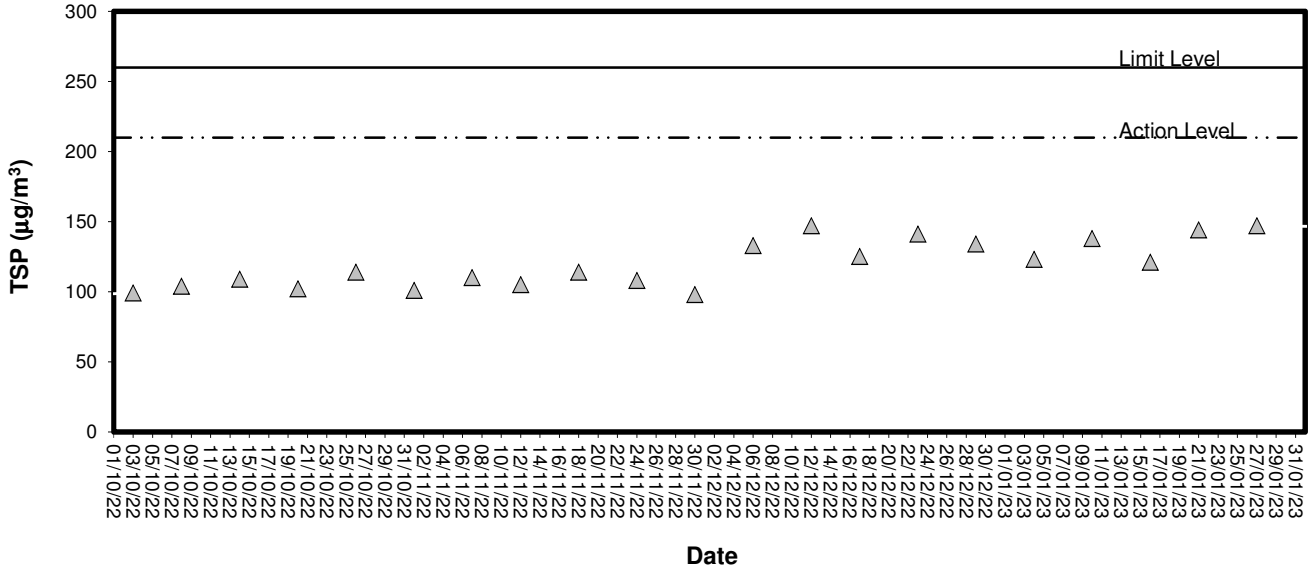

24-hour TSP level at TKO-A2a

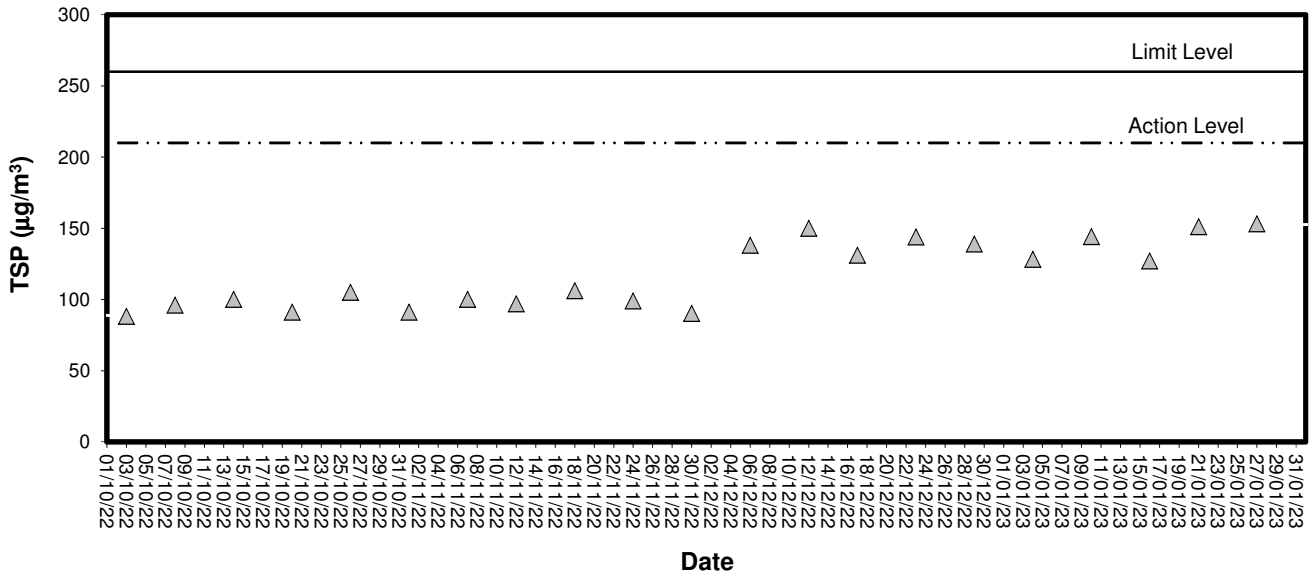

Appendix C1

Calibration Certificates for Impact Noise Monitoring Equipment



Calibration Certificate

Certificate No. : CSA23127

Page : 1 of 2

Information Provided by Customer

Customer : ETS - TESTCONSULT LIMITED
Address : 8/F., Block B, Veristrong Industrial Centre, 34 - 36 Au Pui Wan Street, Fotan, Shatin, Hong Kong

Information of Unit-under-test (UUT)

Description : Sound Level Calibrator
Manufacturer : Castle
Type : GA607
Equipment I.D. : ET/EN/002/07
Serial No. : 038641

Laboratory Information

Lab. Ref. No. : Q/CAL/22/3697/I
Date of Calibration : 18-May-2022
Date of Issue : 18-May-2022
Procedure : CQS/002/A
Date of Receipt : 11-May-2022
Calibration Location : Calibration Laboratory

Calibration Condition

Ambient Temperature : (20±3) °C
Stabilizing Time : 30 minutes
Relative Humidity : (50±20) %

Reference equipment

- Multi-function sound calibrator, ET/2801/01
- Measuring Amplifier, ET/2702/01/01
- Signal generator, ET/2503/01
- Reference Oscilloscope, ET/2502/01

Calibration specification

- To perform the calibration of sound level calibrator.

Calibration result

- The results are detailed on the subsequent pages.

Remarks

- The calibration results apply to the particular unit-under-test only.
- The values given in this calibration certificate only to the values measured at the time of test & any uncertainties quoted will not include allowance for the equipment long term drift, variations with environmental changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement

Calibrated By : Tommy TAM
(Technician)

Approved By: CHAN Chi Wai



Calibration Certificate

Certificate No. : CSA23127

Page : 2 of 2

Calibration Result:

1. Measured Sound Pressure Level:

Nominal Frequency (Hz)	Nominal Output Sound Pressure (dB)	UUT Reading (dB)	Expanded Uncertainty (dB)	Coverage Factor
1000	94.0	93.7	0.13	2.0
1000	104.0	103.7	0.13	2.0

2. Actual Output Frequency:

Nominal Frequency (Hz)	Nominal Output Sound Pressure (dB)	UUT Reading (Hz)	Expanded Uncertainty (Hz)	Coverage Factor
1000	94.0	1000.02	0.11	2.0
1000	104.0	1000.02	0.11	2.0

Remark:

- The uncertainty quoted is based on 95 % confidence level.
- UUT reading are mean of three measurements.

End of certificate



Calibration Certificate

Certificate No. : CSA27977
Page : 1 of 3

Information Provided by Customer

Customer : ETS - Testconsult Limited
Address : 8/F., Block B, Verisrong Industrial Centre, 34 - 36 Au Pui Wan Street, Fotan, Shatin, Hong Kong

Information of Unit-under-test (UUT)

	Sound Level Meter	Microphone	Pre-amplifier
Manufacturer	RION	RION	-
Type	NL-52	UC-59	NH-25
Equipment I.D. no.	ET/EN/003/16	-	-
Serial No.	00253765	07824	43795
Adaptors used	-	-	-
Resolution	0.1 dB	-	-

Laboratory Information

Lab. Ref. No. : Q/CAL/22/9824/1
Date of Calibration : 22-Nov-2022
Date of Issue : 23-Nov-2022
Procedure : CQS/001/A
Date of Receipt : 16-Nov-2022
Calibration Location : Calibration Laboratory

Calibration Condition

Ambient Temperature : (20±3) °C
Stabilizing Time : 30 minutes
Ambient Pressure : (1000±5) hPa
Relative Humidity : (50±20) %
Sampling : As received

Reference equipment

- Multi-function sound calibrator, ET/2801/01
- Signal generator, ET/2503/01

Calibration specification

- To perform the calibration of linearity and frequency response by multi-function sound calibrator.

Calibration result

- The results are detailed on the subsequent pages.

Remarks

- The calibration results apply to the particular unit-under-test only.
- The values given in this calibration certificate only to the values measured at the time of test & any uncertainties quoted will not include allowance for the equipment long term drift, variations with environmental changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement

Calibrated By : Tommy TAM
(Technician)

Approved By: CHAN Chi Wai



Calibration Certificate

Certificate No. : CSA27977

Page : 2 of 3

Calibration Result:

1 Reference Sound Pressure Level : (Unit in: dB)

Range / Mode		Reference Level	REF Frequency (kHz)	UUT Reading	Deviation	Expanded Uncertainty	Coverage Factor		
A-Weighting	Self-cal	Before	94.0	94.3	0.3	0.13	2.0		
	Range	30 to 130	104.0						
	Mode	Fast	114.0						
	A-Weighting	Self-cal	After	94.0	94.0	0.0	0.13	2.0	
		Range	30 to 130	104.0					
		Mode	Fast	114.0					
		A-Weighting	Self-cal	After	94.0	94.0	0.0	0.13	2.0
			Range	30 to 130	104.0				
Mode			Slow	114.0					
C-Weighting			Self-cal	After	94.0	94.0	0.0	0.13	2.0
			Range	30 to 130	104.0				
	Mode		Fast	114.0					
	C-Weighting		Self-cal	After	94.0	94.0	0.0	0.13	2.0
			Range	30 to 130	104.0				
		Mode	Slow	114.0					
Z-Weighting		Self-cal	After	94.0	94.0	0.0	0.13	2.0	
		Range	30 to 130	104.0					
		Mode	Fast	114.0					
	Z-Weighting	Self-cal	After	94.0	94.0	0.0	0.13	2.0	
		Range	30 to 130	104.0					
		Mode	Slow	114.0					

Remark:

- The uncertainty quoted is based on 95 % confidence level.
- UUT reading are mean of three measurements.
- Deviation = UUT Reading - Reference Level
- Laboratory reference multi-function sound calibrator was used to adjust the "Self cal" reading of UUT.



Calibration Certificate

Certificate No. : CSA27977

Page : 3 of 3

Calibration Result:

Acoustic Sensitivity and Frequency Response:

2 Frequency Response A-Weighting (Unit in: dB)

Range	Mode	Applied Level	Frequency (Hz)	Reference Level	UUT Reading	Deviation	IEC 61672-1:2002 class 1 Specification
30 to 130	Fast	94	31.5	54.6	54.7	0.1	-39.4 +/- 2.0
			63	67.8	68.0	0.2	-26.2 +/- 1.5
			125	77.9	78.1	0.2	-16.1 +/- 1.5
			250	85.4	85.5	0.1	-8.6 +/- 1.4
			500	90.8	90.9	0.1	-3.2 +/- 1.4
			1000 (Ref.)	94.0	94.0	0.0	0 +/- 1.1
			2000	95.1	95.0	-0.1	+1.2 +/- 1.6
			4000	94.9	94.1	-0.8	+1.0 +/- 1.6
			8000	82.9	89.8	-3.1	-1.1 (+2.1; -3.1)
			12500	89.7	83.7	-6.0	-4.3 (+3.0; -6.0)
16000	87.5	76.9	-10.6	-6.6 (+3.5; -17.0)			

3 Frequency Response C-Weighting : (Unit in: dB)

Range	Mode	Applied Level	Frequency (Hz)	Reference Level	UUT Reading	Deviation	IEC 61672-1:2002 class 1 Specification
30 to 130	Fast	94	31.5	91.0	91.1	0.1	-3.0 +/- 2.0
			63	93.2	93.4	0.2	-0.8 +/- 1.5
			125	93.8	94.0	0.2	-0.2 +/- 1.5
			250	94.0	94.1	0.1	0.0 +/- 1.4
			500	94.0	94.1	0.1	0.0 +/- 1.4
			1000 (Ref.)	94.0	94.0	0.0	0 +/- 1.1
			2000	93.7	93.6	-0.1	-0.2 +/- 1.6
			4000	93.1	92.3	-0.8	-0.8 +/- 1.6
			8000	91.0	87.9	-3.1	-3.0 (+2.1; -3.1)
			12500	87.8	81.8	-6.0	-6.2 (+3.0; -6.0)
16000	85.6	75.0	-10.6	-8.5 (+3.5; -17.0)			

4 Frequency Response Z-Weighting : (Unit in: dB)

Range	Mode	Applied Level	Frequency (Hz)	Reference Level	UUT Reading	Deviation	IEC 61672-1:2002 class 1 Specification
30 to 130	Fast	94	31.5	94.0	94.0	0.0	0.0 +/- 2.0
			63	94.0	94.1	0.1	0.0 +/- 1.5
			125	94.0	94.2	0.2	0.0 +/- 1.5
			250	94.0	94.1	0.1	0.0 +/- 1.4
			500	94.0	94.1	0.1	0.0 +/- 1.4
			1000 (Ref.)	94.0	94.0	0.0	0 +/- 1.1
			2000	94.0	93.8	-0.2	0.0 +/- 1.6
			4000	94.0	93.1	-0.8	0.0 +/- 1.6
			8000	94.0	90.9	-3.1	0.0 (+2.1; -3.1)
			12500	94.0	88.2	-5.8	0.0 (+3.0; -6.0)
16000	94.0	84.6	-9.4	0.0 (+3.5; -17.0)			

- Expanded uncertainty of measurement:

	Range (Hz)	(dB)	Range (Hz)	(dB)
	94 dB	31.5	0.20	2000
63		0.15	4000	0.13
125		0.15	6000	0.14
250		0.12	12500	0.16
500		0.12	16000	0.16
1000		0.13		

Remark:

- Manufacturer specification: IEC 61672 class 1
- Signal level at 1000 Hz is set as indication of reference sound pressure level.
- The uncertainty quoted is based on 95 % confidence level with coverage factor k=2.0.
- UUT reading are mean of three measurements.
- Deviation = UUT Reading - Reference Level

Appendix C2

Impact Noise Monitoring Results

Day-time Noise Monitoring

Monitoring Location: TKO-N1 (Site Egress)


Date	Start Sampling Time (hh:mm)	Noise Level dB (A)			Wind Speed (m/s)	Weather Condition	Major Noise Source
		L _{eq} (30min)	L ₁₀	L ₉₀			
03/01/2023	09:10	65.2	70.8	61.6	0.3	Fine	Vehicle passing by

Remark: 3dB(A) correction was added to the results during the free-field noise measurements

Appendix C3

Graphical Plots of Impact Noise Monitoring Data

Noise Monitoring (Day-time)

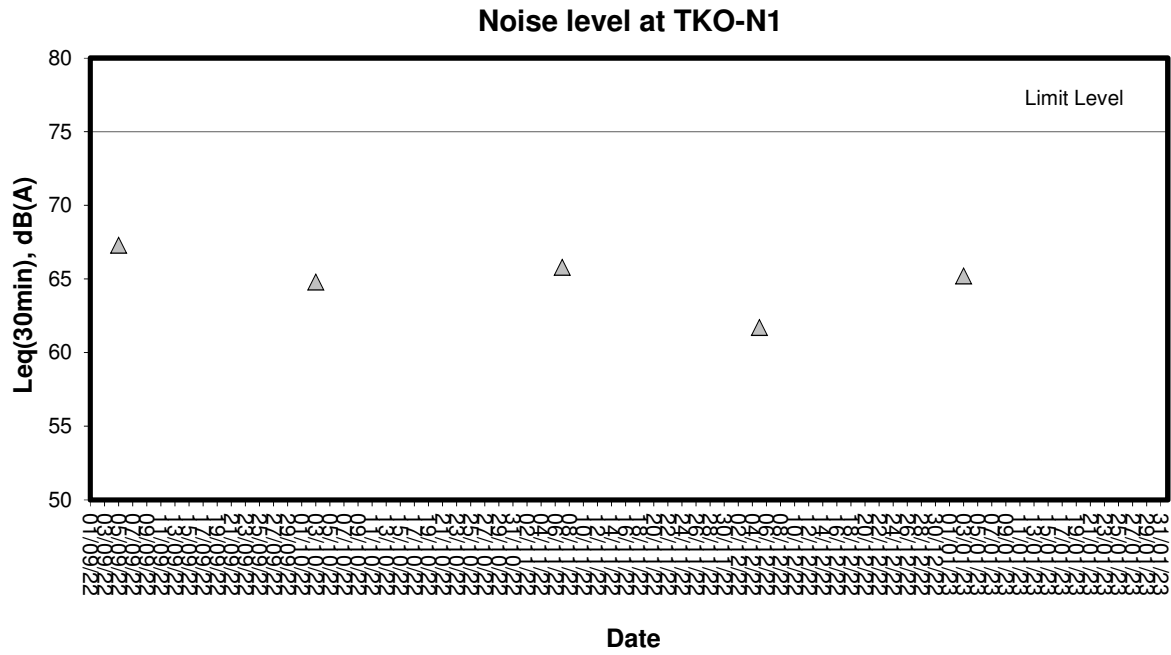

Appendix D1

Calibration Certificates for Impact Marine Water Quality Monitoring Equipments



Performance Check / Calibration of Multiparameter Water Quality Meter

Equipment Ref. No. : ET/EW/008/011
Model No. : Pro DSS
Date of Calibration : 10/27/2022

Manufacturer : YSI
Serial No. : 18M101760
Calibration Due Date : 1/26/2023

Results

1. Temperature

(Method Reference: Section 6 of international Accreditation New Zealand Technical Guide no. 3 Second edition March 2008: Working Thermometer Calibration Procedure)

Reading of Reference Thermometer (°C)	Displayed Reading (°C)	Tolerance (°C)
19.7	19.9	+0.2
25.0	25.1	+0.1
27.2	27.4	+0.2

Tolerance Limit (°C): ± 2.0

2. pH

(Method Reference: APHA 19ed 4500-H⁺ B)

Expected Reading (pH unit)	Displayed Reading (pH unit)	Tolerance (pH unit)

Tolerance Limit (pH unit): ± 0.10

3. Conductivity

(Method Reference: APHA 19ed 2510 B)

Expected Reading ($\mu\text{S}/\text{cm}$)	Displayed Reading ($\mu\text{S}/\text{cm}$)	Tolerance (%)
146.9	149.5	+1.8
1412	1446	+2.4
12890	13051	+1.2
58760	60790	+3.5

Tolerance Limit ($\mu\text{S}/\text{cm}$): $\pm 10.0\%$

4. Salinity

(Method Reference: APHA 19ed 2520 B)

Expected Reading (g/L)	Displayed Reading (g/L)	Tolerance (%)
10.0	10.03	+0.3
20.0	19.55	-2.3
30.0	29.24	-2.5

Tolerance Limit (g/L): $\pm 10.0\%$



Performance Check / Calibration of Multiparameter Water Quality Meter

Equipment Ref. No. : <u>ET/EW/008/011</u>	Manufacturer : <u>YSI</u>
Model No. : <u>Pro DSS</u>	Serial No. : <u>18M101760</u>
Date of Calibration : <u>10/27/2022</u>	Calibration Due Date : <u>1/26/2023</u>

5. Dissolved Oxygen
(Method Reference: APHA 19ed 4500-O G)

Expected Reading (mg/L)	Displayed Reading (mg/L)	Tolerance (mg/L)
1.55	1.58	+0.03
4.81	4.91	+0.10
6.07	6.12	+0.05

Tolerance Limit (mg/L): ± 0.20

6. Turbidity
(Method Reference: APHA 19ed 2130 B)

Expected Reading (NTU)	Displayed Reading (NTU)	Tolerance (%)
10	10.1	+1.0
40	40.9	+2.3
100	99.4	-0.6
400	406.8	+1.7

Tolerance Limit (NTU): $\pm 10.0\%$

The equipment complies [#] / ~~does not comply~~ [#] with the specified requirements and is deemed acceptable [#] / unacceptable [#] for use.

[#] Delete as appropriate

Calibrated by : 

Approved by : 



Performance Check / Calibration of Multiparameter Water Quality Meter

Equipment Ref. No. : ET/EW/008/011
Model No. : Pro DSS
Date of Calibration : 25/1/2023

Manufacturer : YSI
Serial No. : 18M101760
Calibration Due Date : 24/4/2023

Results

1. Temperature

(Method Reference: Section 6 of international Accreditation New Zealand Technical Guide no. 3 Second edition March 2008:
Working Thermometer Calibration Procedure)

Reading of Reference Thermometer (°C)	Displayed Reading (°C)	Tolerance (°C)
18.6	18.5	-0.1
25.0	25.4	+0.4
26.7	26.6	-0.1

Tolerance Limit (°C): ± 2.0

2. pH

(Method Reference: APHA 19ed 4500-H⁺ B)

Expected Reading (pH unit)	Displayed Reading (pH unit)	Tolerance (pH unit)

Tolerance Limit (pH unit): ± 0.10

3. Conductivity

(Method Reference: APHA 19ed 2510 B)

Expected Reading ($\mu\text{S}/\text{cm}$)	Displayed Reading ($\mu\text{S}/\text{cm}$)	Tolerance (%)
146.9	148.5	+1.1
1412	1454	+3.0
12890	13007	+0.9
58760	59957	+2.0

Tolerance Limit ($\mu\text{S}/\text{cm}$): $\pm 10.0\%$

4. Salinity

(Method Reference: APHA 19ed 2520 B)

Expected Reading (g/L)	Displayed Reading (g/L)	Tolerance (%)
10.0	9.72	-2.8
20.0	19.46	-2.7
30.0	29.69	-1.0

Tolerance Limit (g/L): $\pm 10.0\%$



Performance Check / Calibration of Multiparameter Water Quality Meter

Equipment Ref. No. : ET/EW/008/011
Model No. : Pro DSS
Date of Calibration : 25/1/2023

Manufacturer : YSI
Serial No. : 18M101760
Calibration Due Date : 24/4/2023

5. Dissolved Oxygen (Method Reference: APHA 19ed 4500-O G)

Expected Reading (mg/L)	Displayed Reading (mg/L)	Tolerance (mg/L)
1.44	1.51	+0.07
4.36	4.41	+0.05
6.38	6.53	+0.15

Tolerance Limit (mg/L): ± 0.20

6. Turbidity (Method Reference: APHA 19ed 2130 B)

Expected Reading (NTU)	Displayed Reading (NTU)	Tolerance (%)
10	9.8	+2.0
40	40.3	+0.8
100	98.9	-1.1
400	395.5	-1.1

Tolerance Limit (NTU): $\pm 10.0\%$

The equipment complies [#] / does not comply [#] with the specified requirements and is deemed acceptable [#] / unacceptable [#] for use.

[#] Delete as appropriate

Calibrated by : Fw

Approved by : [Signature]

Appendix D2

Impact Marine Water Quality Monitoring Results

Mid-Flood Tide

Monitoring Station : TKO-C1

Date	Time	Ambient Temp (°C) / Weather Condition	Monitoring Depth (m)		Temp (°C)	Salinity (ppt)		Dissolved Oxygen (mg/L)			Dissolved Oxygen Saturation (%)		Turbidity (NTU)			Suspended Solids (mg/L)			
						Value	Average	Value	Average	Depth-average	Value	Average	Value	Average	Depth-average	Value	Average	Depth-average	
3/1/2023	13:30:09	19	Surface	1.0	18.0	30.5	30.6	6.91	6.92	6.84	87.6	87.8	2.16	2.15	2.37	1.9	2.5	2.5	
						30.6		6.93			87.9		2.13			3.1			
			Middle	9.7	17.8	30.7	30.7	6.77	6.76	85.6	85.4	2.44	2.42	2.2		1.9			
		/ Fine	Bottom	19.4	17.7	30.7	30.8	6.74	6.44	85.2	81.4	2.40	2.55	2.56		2.55	2.3		3.2
						30.8		6.42		81.6		2.54		4.1					
						30.4		7.01		89.9		1.78		2.8					
5/1/2023	15:00:07	20	Surface	1.0	18.8	30.4	30.4	6.91	6.96	6.84	89.9	90.1	1.78	1.79	2.00	2.8	3.5	2.8	
						30.4		7.01			90.2		1.79			4.2			
			Middle	9.6	18.6	30.6	30.6	6.70	6.71	86.0	86.1	2.00	2.00	2.0		2.2			
		/ Fine	Bottom	19.3	18.4	30.6	30.7	6.72	6.48	86.2	82.9	2.00	2.23	2.21		2.24	2.5		2.7
						30.7		6.48		82.9		2.24		2.9					
						30.4		6.91		89.9		1.78		2.8					
7/1/2023	16:00:01	19	Surface	1.0	18.7	29.9	29.9	7.01	7.00	6.81	89.8	89.6	1.55	1.57	1.77	3.4	3.6	2.7	
						29.9		6.98			89.4		1.58			3.7			
			Middle	9.5	18.5	30.2	30.2	6.63	6.63	84.7	84.6	1.76	1.77	2.5		2.5			
		/ Fine	Bottom	19.0	18.2	30.2	30.4	6.62	6.34	84.6	80.6	1.78	1.98	1.97		1.98	2.4		2.1
						30.4		6.35		80.8		1.97		2.2					
						30.4		6.33		80.5		1.99		2.0					
9/1/2023	8:21:09	20	Surface	1.0	19.4	30.4	30.4	7.01	7.02	6.92	91.2	91.4	1.97	1.97	2.20	1.8	2.4	2.4	
						30.4		7.03			91.5		1.96			2.9			
			Middle	10.4	19.2	30.5	30.5	6.82	6.82	88.5	88.4	2.23	2.24	2.2		1.7			
		/ Fine	Bottom	20.9	19.0	30.5	30.6	6.81	6.60	88.3	85.4	2.24	2.41	2.40		2.41	2.0		3.3
						30.6		6.59		85.2		2.40		2.6					
						30.6		6.61		85.5		2.42		3.9					
11/1/2023	9:02:18	19	Surface	1.0	18.4	28.3	28.3	7.02	7.02	6.88	88.5	88.5	1.77	1.78	2.03	2.6	2.6	1.9	
						28.3		7.01			88.4		1.79			2.6			
			Middle	9.7	18.2	28.7	28.7	6.76	6.75	85.1	85.0	2.03	2.05	2.4		1.7			
		/ Fine	Bottom	19.3	17.9	28.7	29.1	6.74	6.37	84.9	79.9	2.06	2.25	2.24		2.26	1.0		1.4
						29.1		6.39		80.2		2.24		1.7					
						29.1		6.35		79.7		2.26		1.0					
13/1/2023	9:33:06	20	Surface	1.0	19.0	30.0	30.0	6.93	6.91	6.70	89.3	89.0	1.48	1.50	1.63	1.2	1.2	1.6	
						30.0		6.89			88.8		1.51			1.1			
			Middle	9.6	18.8	30.3	30.3	6.50	6.49	83.6	83.4	1.62	1.63	1.4		1.3			
		/ Fine	Bottom	19.2	18.5	30.3	30.5	6.48	6.23	83.3	79.8	1.63	1.76	1.74		1.77	3.0		2.4
						30.5		6.24		79.9		1.74		1.8					
						30.5		6.22		79.6		1.77		1.8					
16/1/2023	11:00:06	18	Surface	1.0	17.4	29.8	29.8	7.05	7.04	6.90	88.0	87.9	2.38	2.37	2.39	1.6	2.5	2.7	
						29.8		7.03			87.8		2.35			3.3			
			Middle	9.6	17.2	29.9	30.0	6.73	6.75	83.7	84.0	2.26	2.28	2.2		3.3			
		/ Fine	Bottom	19.2	17.1	30.0	30.1	6.77	6.54	84.2	81.3	2.30	2.53	2.54		2.52	3.4		2.5
						30.1		6.55		81.4		2.54		3.3					
						30.1		6.52		81.1		2.52		1.6					
18/1/2023	14:00:08	18	Surface	1.0	17.0	30.2	30.3	6.88	6.86	6.73	85.4	85.2	2.32	2.31	2.47	1.4	1.8	1.6	
						30.3		6.84			85.0		2.30			2.1			
			Middle	9.7	16.8	30.4	30.4	6.61	6.60	81.9	81.8	2.44	2.46	1.2		1.2			
		/ Fine	Bottom	19.4	16.7	30.4	30.5	6.59	6.36	81.6	78.6	2.47	2.64	2.66		2.62	2.0		1.8
						30.5		6.34		78.4		2.66		1.6					
						30.5		6.37		78.8		2.62		1.6					
20/1/2023	15:00:05	18	Surface	1.0	17.5	30.2	30.2	7.04	7.05	6.96	88.3	88.4	1.65	1.66	1.89	2.1	2.4	1.9	
						30.2		7.05			88.4		1.66			2.6			
			Middle	10.6	17.3	30.4	30.4	6.87	6.87	85.9	85.9	1.79	1.80	1.2		1.3			
		/ Fine	Bottom	21.2	17.0	30.4	30.6	6.86	6.70	85.8	83.4	1.81	2.23	2.23		2.22	1.4		2.1
						30.6		6.71		83.5		2.23		2.5					
						30.6		6.69		83.3		2.22		1.6					
26/1/2023	10:00:07	17	Surface	1.0	15.8	30.4	30.4	8.12	8.12	7.99	98.6	98.6	1.78	1.80	2.01	2.1	2.1	2.1	
						30.4		8.11			98.5		1.81			2.1			
			Middle	9.6	15.6	30.6	30.6	7.85	7.86	95.1	95.2	2.00	2.01	1.9		2.8			
		/ Fine	Bottom	19.3	15.4	30.6	30.7	7.87	7.59	95.3	91.6	2.01	2.22	2.21		2.23	3.7		1.3
						30.7		7.59		91.6		2.21		1.3					
						30.7		7.58		91.5		2.23		1.3					
28/1/2023	11:00:07	17	Surface	1.0	16.5	30.2	30.2	6.93	6.91	6.70	85.2	84.9	2.08	2.07	2.27	2.6	2.9	3.2	
						30.2		6.88			84.6		2.06			3.2			
			Middle	9.7	16.3	30.6	30.6	6.51	6.50	79.9	79.6	2.26	2.26	2.8		3.7			
		/ Fine	Bottom	19.3	16.0	30.6	30.9	6.49	6.19	79.4	75.5	2.25	2.48	2.47		2.48	4.5		3.0
						30.8		6.20		75.8		2.47		4.1					
						30.9		6.17		75.3		2.48		1.9					
30/1/2023	11:30:12	19	Surface	1.0	18.5	29.9	29.9	7.03	7.00	6.77	89.7	89.2	1.36	1.37	1.63	2.5	2.7	3.1	
						29.9		6.96			88.8		1.38			2.9			
			Middle	9.6	18.3	30.5	30.5	6.56	6.55	83.7	83.5	1.62	1.64	2.1		2.2			
		/ Fine	Bottom	19.3	18.0	30.5	31.0	6.54	6.18	83.3	79.1	1.65	1.88	1.89		1.87	2.2		4.3
						31.0		6.22		79.1		1.89		7.4					
						31.0		6.14		78.6		1.87		1.2					

Remark: The SS value below 1.0 mg/L is reported as "1.0" mg/L and highlighted in yellow in the table.

Mid-Flood Tide

Monitoring Station : TKO-M4

Date	Time	Ambient Temp (°C) / Weather Condition	Monitoring Depth (m)		Temp (°C)	Salinity (ppt)		Dissolved Oxygen (mg/L)			Dissolved Oxygen Saturation (%)		Turbidity (NTU)			Suspended Solids (mg/L)		
						Value	Average	Value	Average	Depth-average	Value	Average	Value	Average	Depth-average	Value	Average	Depth-average
3/1/2023	15:00:08	19	Surface	1.0	18.1	30.6	30.6	7.30	7.32	7.10	92.8	93.0	1.81	1.83	1.92	4.4	3.9	2.9
						30.6		7.33			93.2		1.84			3.3		
			Middle	4.4	17.9	30.8	30.8	6.90	6.88		87.5	87.2	1.74	1.76		4.2	3.5	
		/ Fine	Bottom	8.7	17.7	30.7	30.9	6.86	6.66		86.9	84.2	1.78	2.18		2.8	1.4	
						30.9		6.67			84.3		2.19			1.3		
						30.9		6.65			84.1		2.17			1.4		
5/1/2023	15:19:05	20	Surface	1.0	18.8	30.3	30.3	7.10	7.11	7.09	91.3	91.5	1.34	1.36	1.53	1.9	2.1	2.1
						30.3		7.12			91.6		1.37			2.3		
			Middle	4.5	18.6	30.5	30.5	7.05	7.06		90.4	90.6	1.59	1.57		2.1	2.3	
		/ Fine	Bottom	9.0	18.4	30.5	30.6	7.07	6.76		90.7	86.5	1.55	1.67		2.5	2.0	
						30.6		6.77			86.6		1.66			2.5		
						30.6		6.75			86.3		1.67			1.4		
7/1/2023	17:15:58	19	Surface	1.0	18.5	30.2	30.2	7.01	6.99	6.80	89.6	89.2	1.52	1.53	1.67	1.8	1.9	2.1
						30.2		6.96			88.9		1.54			2.0		
			Middle	4.3	18.3	30.4	30.4	6.62	6.61		84.4	84.2	1.62	1.64		2.0	2.2	
		/ Fine	Bottom	8.6	18.1	30.4	30.8	6.59	6.28		84.0	79.8	1.65	1.83		2.4	2.1	
						30.8		6.29			80.0		1.82			2.2		
						30.8		6.27			79.6		1.84			1.9		
9/1/2023	9:36:09	20	Surface	1.0	19.5	30.5	30.5	6.82	6.82	6.77	89.0	89.0	1.86	1.85	2.00	1.8	1.9	1.8
						30.5		6.82			89.0		1.84			2.0		
			Middle	4.6	19.3	30.5	30.5	6.71	6.72		87.2	87.3	1.99	2.00		2.4	2.1	
		/ Fine	Bottom	9.3	19.2	30.5	30.6	6.72	6.62		87.3	85.9	2.01	2.14		1.7	1.5	
						30.6		6.62			85.9		2.14			1.3		
						30.6		6.61			85.8		2.14			1.6		
11/1/2023	10:28:02	19	Surface	1.0	18.3	28.4	28.4	7.05	7.04	6.94	88.8	88.6	1.52	1.53	1.72	1.0	1.0	1.3
						28.4		7.03			88.4		1.53			1.0		
			Middle	4.4	18.0	28.7	28.7	6.86	6.84		86.1	85.8	1.66	1.67		1.5	1.7	
		/ Fine	Bottom	8.7	17.8	28.7	29.2	6.82	6.43		85.6	80.5	1.68	1.95		1.8	1.1	
						29.2		6.44			80.7		1.94			1.2		
						29.2		6.41			80.2		1.96			1.2		
13/1/2023	11:06:59	20	Surface	1.0	18.9	30.2	30.2	6.72	6.71	6.50	86.5	86.4	1.41	1.42	1.57	1.7	1.5	1.5
						30.2		6.70			86.3		1.43			1.2		
			Middle	4.4	18.6	30.5	30.5	6.31	6.30		80.9	80.6	1.56	1.56		1.7	1.9	
		/ Fine	Bottom	8.8	18.3	30.5	30.7	6.28	5.92		80.4	75.6	1.55	1.72		2.1	1.3	
						30.7		5.94			75.9		1.71			1.1		
						30.7		5.90			75.3		1.73			1.4		
16/1/2023	12:29:05	18	Surface	1.0	17.2	29.9	30.0	7.19	7.18	7.07	89.5	89.3	2.01	2.03	2.17	2.9	3.0	3.3
						30.0		7.16			89.1		2.04			3.0		
			Middle	4.4	17.1	30.1	30.1	6.98	6.97		86.8	86.6	2.18	2.16		3.3	3.4	
		/ Fine	Bottom	8.7	16.9	30.1	30.2	6.95	6.64		86.4	82.3	2.14	2.31		3.5	3.5	
						30.2		6.66			82.5		2.32			2.9		
						30.2		6.62			82.1		2.30			4.0		
18/1/2023	15:28:06	18	Surface	1.0	16.8	30.3	30.3	7.01	7.02	6.90	80.8	83.9	2.15	2.13	2.26	2.6	1.9	1.9
						30.3		7.03			87.0		2.11			1.1		
			Middle	4.4	16.6	30.5	30.5	6.79	6.78		82.8	83.2	2.22	2.23		1.8	2.3	
		/ Fine	Bottom	8.7	16.5	30.4	30.6	6.77	6.51		83.5	80.3	2.24	2.42		2.8	1.5	
						30.6		6.53			80.5		2.43			1.4		
						30.6		6.49			80.0		2.40			1.5		
20/1/2023	16:21:03	18	Surface	1.0	17.5	30.3	30.3	7.29	7.28	7.19	91.5	91.4	1.47	1.46	1.65	3.3	2.4	1.7
						30.3		7.27			91.2		1.45			1.4		
			Middle	4.7	17.4	30.4	30.4	7.10	7.09		89.0	88.9	1.64	1.65		1.1	1.5	
		/ Fine	Bottom	9.5	17.2	30.4	30.4	7.08	6.93		88.7	86.5	1.65	1.83		1.9	1.3	
						30.4		6.93			86.5		1.82			1.3		
						30.4		6.93			86.5		1.84			1.3		
26/1/2023	10:23:07	17	Surface	1.0	15.8	30.2	30.2	7.21	7.21	7.18	87.4	87.4	1.34	1.34	1.51	1.2	1.4	1.4
						30.2		7.21			87.4		1.34			1.5		
			Middle	4.5	15.6	30.4	30.4	7.15	7.15		86.5	86.5	1.54	1.53		1.2	1.4	
		/ Fine	Bottom	9.0	15.4	30.4	30.5	7.14	6.82		86.4	84.9	1.51	1.66		1.6	1.4	
						30.5		6.81			87.3		1.66			1.3		
						30.5		6.82			82.4		1.66			1.5		
28/1/2023	12:19:09	17	Surface	1.0	16.4	30.3	30.3	6.92	6.91	6.73	85.0	84.9	1.85	1.86	2.03	3.0	3.0	2.6
						30.3		6.90			84.7		1.87			2.9		
			Middle	4.5	16.2	30.5	30.5	6.56	6.55		80.3	80.2	1.96	1.98		2.3	2.3	
		/ Fine	Bottom	9.0	16.0	30.5	30.8	6.53	6.19		80.0	75.5	1.99	2.26		2.2	2.5	
						30.7		6.21			75.8		2.24			2.3		
						30.8		6.16			75.1		2.27			2.6		
30/1/2023	12:54:54	19	Surface	1.0	18.5	30.7	30.7	6.98	6.97	6.82	89.5	89.2	1.27	1.25	1.48	3.0	3.0	2.5
						30.7		6.95			88.9		1.23			3.0		
			Middle	4.3	18.2	31.4	31.4	6.69	6.67		85.6	85.4	1.46	1.49		2.0	2.2	
		/ Fine	Bottom	8.7	17.9	31.4	31.8	6.65	6.22		85.1	79.3	1.52	1.71		2.4	2.2	
						31.8		6.23			79.5		1.71			2.3		
						31.8		6.21			79.2		1.71			2.0		

Remark: The SS value below 1.0 mg/L is reported as "1.0" mg/L and highlighted in yellow in the table.

Mid-Ebb Tide

Monitoring Station : TKO-C1

Date	Time	Ambient Temp (°C) / Weather Condition	Monitoring Depth (m)		Temp (°C)	Salinity (ppt)		Dissolved Oxygen (mg/L)			Dissolved Oxygen Saturation (%)		Turbidity (NTU)			Suspended Solids (mg/L)		
						Value	Average	Value	Average	Depth-average	Value	Average	Value	Average	Depth-average	Value	Average	Depth-average
3/1/2023	8:30:08	19	Surface	1.0	17.8	30.5	30.5	6.84	6.83	6.71	86.4	86.2	2.27	2.29	2.53	2.5	1.9	1.7
						30.5		6.81			86.0		2.30			1.3		
			Middle	9.6	17.7	30.6	6.58	83.0	2.56		1.9							
		/ Fine	Bottom	19.3	17.5	30.8	30.8	6.60	6.33		83.3	2.52	2.54	1.4		1.5		
								30.7			6.31	79.4	2.78	1.5				
								30.8			6.35	79.9	2.74	1.4				
5/1/2023	10:00:06	20	Surface	1.0	18.8	30.3	30.3	7.05	7.06	6.91	90.7	90.8	1.85	1.85	2.11	1.4	1.8	2.9
						30.3		7.07			90.9		1.85			2.1		
			Middle	9.5	18.6	30.5	6.76	86.1	2.14		4.2							
		/ Fine	Bottom	19.1	18.4	30.6	30.6	6.74	6.51		86.5	2.17	2.16	4.3		2.8		
								6.51			83.2	2.32	4.0					
								6.50			83.1	2.32	1.5					
7/1/2023	11:30:06	19	Surface	1.0	18.5	29.7	29.7	7.12	7.11	6.98	90.7	90.6	1.36	1.39	1.66	1.9	3.2	2.3
						29.7		7.10			90.5		1.42			4.5		
			Middle	9.6	18.3	30.0	6.85	87.1	1.69		2.0							
		/ Fine	Bottom	19.1	18.0	30.3	30.3	6.84	6.52		87.0	1.72	1.71	1.1		1.6		
								6.52			82.6	1.88	2.1					
								6.51			82.5	1.89	2.0					
9/1/2023	13:00:09	20	Surface	1.0	19.5	30.5	30.5	6.92	6.93	6.84	90.3	90.4	2.11	2.12	2.37	1.4	1.3	1.5
						30.4		6.93			90.4		2.13			1.2		
			Middle	9.8	19.3	30.5	6.74	87.6	2.37		1.7							
		/ Fine	Bottom	19.7	19.0	30.6	30.7	6.77	6.52		88.0	2.38	2.38	1.7		1.5		
								6.52			84.3	2.64	1.3					
								6.51			84.2	2.59	1.7					
11/1/2023	14:00:03	19	Surface	1.0	18.5	28.3	28.3	7.05	7.03	6.95	89.1	88.8	1.83	1.84	2.05	1.1	1.1	1.3
						28.3		7.01			88.6		1.85			1.1		
			Middle	9.5	18.3	28.6	6.87	86.6	2.02		1.5							
		/ Fine	Bottom	19.0	18.0	29.1	29.1	6.85	6.33		86.4	2.03	2.03	1.3		1.4		
								6.34			79.7	2.28	1.2					
								6.32			79.5	2.31	1.5					
13/1/2023	15:30:01	20	Surface	1.0	19.1	30.1	30.1	6.96	6.95	6.72	89.9	89.7	1.56	1.57	1.75	2.6	2.9	2.1
						30.1		6.93			89.5		1.58			3.1		
			Middle	9.5	18.9	30.4	6.51	83.9	1.77		2.7							
		/ Fine	Bottom	19.0	18.6	30.4	30.6	6.47	6.21		83.4	1.79	1.78	1.4		2.1		
								6.23			79.9	1.90	1.4					
								6.18			79.3	1.92	1.5					
16/1/2023	17:30:03	18	Surface	1.0	17.2	29.8	29.8	6.88	6.90	6.75	85.6	85.8	2.47	2.46	2.52	4.6	4.5	3.9
						29.8		6.91			85.9		2.45			4.4		
			Middle	9.5	17.1	29.9	6.62	82.2	2.37		3.5							
		/ Fine	Bottom	19.0	16.9	30.0	30.1	6.60	6.36		82.0	2.40	2.39	2.3		2.9		
								6.38			79.0	2.70	3.1					
								6.34			78.5	2.74	5.5					
18/1/2023	8:30:04	18	Surface	1.0	16.9	30.2	30.2	6.79	6.78	6.63	84.1	84.0	2.44	2.43	2.58	1.1	1.6	1.5
						30.2		6.76			83.8		2.41			2.1		
			Middle	9.6	16.7	30.4	6.48	80.1	2.56		1.2							
		/ Fine	Bottom	19.3	16.6	30.3	30.4	6.50	6.22		80.3	2.58	2.57	1.2		1.2		
								6.20			76.5	2.75	2.1					
								6.24			77.0	2.71	1.1					
20/1/2023	10:30:08	18	Surface	1.0	17.3	30.1	30.1	6.95	6.94	6.81	86.8	86.7	1.78	1.78	2.01	1.0	1.1	1.0
						30.1		6.93			86.5		1.78			1.2		
			Middle	10.1	17.1	30.3	6.67	83.0	1.99		1.0							
		/ Fine	Bottom	20.2	16.8	30.3	30.5	6.68	6.40		83.2	2.01	2.00	1.0		1.0		
								6.39			79.2	2.25	1.0					
								6.41			79.4	2.25	1.0					
26/1/2023	15:00:03	17	Surface	1.0	15.9	30.5	30.5	8.15	8.15	8.01	99.2	99.2	1.85	1.86	2.11	2.8	2.0	1.5
						30.5		8.14			99.1		1.87			1.2		
			Middle	9.5	15.7	30.7	7.86	95.4	2.14		1.0							
		/ Fine	Bottom	19.1	15.5	30.7	30.8	7.88	7.62		95.7	2.15	2.15	1.1		1.1		
								7.61			92.1	2.32	1.7					
								7.62			92.2	2.35	1.2					
28/1/2023	17:00:07	17	Surface	1.0	16.6	30.3	30.3	6.88	6.86	6.60	84.8	84.6	2.14	2.15	2.34	2.1	2.4	2.3
						30.3		6.84			84.3		2.15			2.6		
			Middle	9.6	16.3	30.6	6.36	78.1	2.36		2.3							
		/ Fine	Bottom	19.1	16.0	30.6	30.6	6.31	5.95		77.5	2.38	2.37	2.5		2.4		
								5.97			73.0	2.49	2.3					
								5.92			72.3	2.53	2.3					
30/1/2023	17:30:19	19	Surface	1.0	18.6	30.1	30.1	6.96	6.95	6.72	89.1	88.9	1.52	1.56	1.77	2.2	3.0	2.6
						30.1		6.93			88.7		1.59			3.7		
			Middle	9.5	18.4	30.7	6.49	83.0	1.74		2.3							
		/ Fine	Bottom	19.1	18.1	30.7	31.3	6.48	6.19		82.9	1.72	1.73	2.4		2.4		
								6.21			79.3	2.03	2.3					
								6.17			78.8	2.04	2.3					

Remark: The SS value below 1.0 mg/L is reported as "1.0" mg/L and highlighted in yellow in the table.

Mid-Ebb Tide

Monitoring Station : TKO-M4


Date	Time	Ambient Temp (°C) / Weather Condition	Monitoring Depth (m)		Temp (°C)	Salinity (ppt)		Dissolved Oxygen (mg/L)			Dissolved Oxygen Saturation (%)		Turbidity (NTU)			Suspended Solids (mg/L)			
						Value	Average	Value	Average	Depth-average	Value	Average	Value	Average	Depth-average	Value	Average	Depth-average	
3/1/2023	9:59:05	19	Surface	1.0	18.0	30.5	30.6	7.18	7.20	6.97	91.1	91.4	1.94	1.92	2.07	2.2	1.9	1.8	
						30.6		7.22			91.6		1.90			1.6			
			Middle	4.3	17.8	30.7	6.72	85.0	85.2		2.01	1.4							
		/ Fine	Bottom	8.6	17.6	30.7	30.8	6.75	6.47		85.4	81.6	2.03	2.27		2.0	1.9		1.8
						30.8		6.48			81.7		2.25			2.0			
						30.8		6.46			81.4		2.28			1.8			
5/1/2023	10:21:05	20	Surface	1.0	18.8	30.5	30.5	6.98	6.99	6.82	89.9	90.0	1.43	1.45	1.60	1.6	1.7	1.8	
						30.5		6.99			90.0		1.46			1.8			
			Middle	4.4	18.6	30.7	6.64	85.3	85.4		1.60	2.1							
		/ Fine	Bottom	8.8	18.4	30.7	30.8	6.65	6.41		85.4	82.1	1.60	1.74		2.0	1.6		2.3
						30.8		6.41			82.1		1.74			2.1			
						30.8		6.41			82.1		1.74			1.1			
7/1/2023	12:51:59	19	Surface	1.0	18.4	30.0	30.0	6.99	6.97	6.82	89.0	88.7	1.18	1.18	1.40	1.8	1.9	2.1	
						30.0		6.95			88.4		1.17			1.9			
			Middle	4.4	18.1	30.2	6.67	84.6	84.5		1.32	2.2							
		/ Fine	Bottom	8.8	17.9	30.2	30.4	6.65	6.33		84.4	80.1	1.36	1.68		1.9	2.5		2.4
						30.4		6.35			80.3		1.67			2.6			
						30.5		6.31			79.8		1.69			2.6			
9/1/2023	14:16:08	20	Surface	1.0	19.5	30.4	30.4	6.75	6.75	6.68	88.0	88.0	1.97	1.97	2.16	2.3	2.0	1.6	
						30.4		6.75			88.0		1.96			1.7			
			Middle	4.3	19.4	30.5	6.61	86.1	86.1		2.12	1.1							
		/ Fine	Bottom	8.5	19.2	30.5	30.6	6.61	6.50		86.1	84.4	2.14	2.39		1.7	1.5		1.7
						30.6		6.49			84.2		2.39			1.5			
						30.6		6.51			84.5		2.38			1.5			
11/1/2023	15:28:13	19	Surface	1.0	18.4	28.4	28.4	6.84	6.83	6.64	86.3	86.1	1.63	1.64	1.87	1.6	1.3	1.2	
						28.5		6.81			85.8		1.65			1.0			
			Middle	4.2	18.0	28.8	6.46	81.1	80.9		1.97	1.5							
		/ Fine	Bottom	8.5	17.8	28.8	29.3	6.43	6.45		80.7	74.8	1.97	2.01		1.0	1.0		1.0
						29.3		5.98			75.0		2.01			1.0			
						29.3		5.96			74.6		2.01			1.0			
13/1/2023	17:01:58	20	Surface	1.0	18.9	30.3	30.3	6.84	6.83	6.58	88.1	88.0	1.52	1.54	1.68	1.8	1.7	2.3	
						30.4		6.81			87.8		1.55			1.6			
			Middle	4.3	18.7	30.6	6.33	81.4	81.3		1.63	2.2							
		/ Fine	Bottom	8.6	18.5	30.6	31.0	6.32	6.33		81.3	75.8	1.66	1.85		3.5	2.5		2.2
						31.0		5.92			76.0		1.85			2.7			
						31.0		5.90			75.6		1.85			2.7			
16/1/2023	18:59:06	18	Surface	1.0	17.1	30.0	30.0	6.95	6.96	6.79	86.4	86.5	2.10	2.09	2.25	2.8	3.1	3.7	
						30.0		6.97			86.6		2.07			3.4			
			Middle	4.3	17.0	30.1	6.63	82.3	82.1		2.22	1.3							
		/ Fine	Bottom	8.6	16.8	30.1	30.2	6.60	6.62		81.9	79.5	2.26	2.42		3.3	5.6		3.3
						30.2		6.44			79.7		2.43			4.2			
						30.2		6.40			79.2		2.41			6.9			
18/1/2023	10:01:03	18	Surface	1.0	16.9	30.3	30.3	6.89	6.91	6.77	85.4	85.6	2.20	2.19	2.37	1.3	2.2	1.5	
						30.2		6.92			85.8		2.18			3.0			
			Middle	4.3	16.7	30.4	6.61	81.7	82.0		2.35	1.1							
		/ Fine	Bottom	8.5	16.6	30.4	30.6	6.65	6.39		82.2	78.9	2.32	2.57		1.2	1.1		1.2
						30.5		6.40			79.0		2.58			1.0			
						30.6		6.38			78.8		2.56			1.1			
20/1/2023	11:45:07	18	Surface	1.0	17.3	30.2	30.2	7.23	7.22	7.15	90.3	90.2	1.62	1.63	1.89	1.0	1.0	1.0	
						30.2		7.21			90.1		1.64			1.0			
			Middle	4.4	17.2	30.4	7.08	88.4	88.3		1.92	1.0							
		/ Fine	Bottom	8.8	17.0	30.4	30.4	7.07	6.88		88.2	85.6	1.92	2.12		1.0	1.0		1.0
						30.4		6.87			85.4		2.11			1.0			
						30.4		6.89			85.7		2.12			1.0			
26/1/2023	15:25:03	17	Surface	1.0	15.7	30.3	30.3	7.80	7.81	7.67	94.5	94.6	1.43	1.44	1.60	1.2	1.3	1.5	
						30.3		7.82			94.7		1.45			1.3			
			Middle	4.4	15.5	30.5	7.54	91.1	91.0		1.60	1.2							
		/ Fine	Bottom	8.8	15.3	30.5	30.6	7.52	7.28		90.8	87.7	1.61	1.75		1.4	1.9		1.4
						30.6		7.27			87.5		1.74			2.2			
						30.6		7.29			87.8		1.76			1.5			
28/1/2023	18:16:06	17	Surface	1.0	16.6	30.6	30.6	6.79	6.77	6.55	83.9	83.5	1.81	1.82	2.00	2.3	2.1	2.0	
						30.6		6.75			83.2		1.83			1.8			
			Middle	4.4	16.3	30.8	6.33	77.8	77.7		1.97	1.9							
		/ Fine	Bottom	8.8	16.0	30.9	31.1	6.32	6.04		77.6	73.9	1.98	2.20		2.4	1.8		2.2
						31.1		6.04			73.9		2.19			1.8			
						31.1		6.03			73.8		2.20			1.8			
30/1/2023	18:59:18	19	Surface	1.0	18.6	30.9	30.9	6.96	6.95	6.65	89.5	89.3	1.38	1.40	1.64	2.2	2.2	2.5	
						30.9		6.94			89.1		1.41			2.2			
			Middle	4.2	18.3	31.4	6.36	81.5	81.4		1.67	2.3							
		/ Fine	Bottom	8.4	18.1	31.4	31.7	6.33	6.35		81.2	76.6	1.68	1.85		2.7	2.8		2.7
						31.7		6.01			76.9		1.85			3.0			
						31.7		5.97			76.3		1.84			3.0			

Remark: The SS value below 1.0 mg/L is reported as "1.0" mg/L and highlighted in yellow in the table.


Appendix D3

Graphical Plots of Impact Marine Water Quality Monitoring Data


Dissolved Oxygen (Surface & Middle) at Mid-Flood Tide

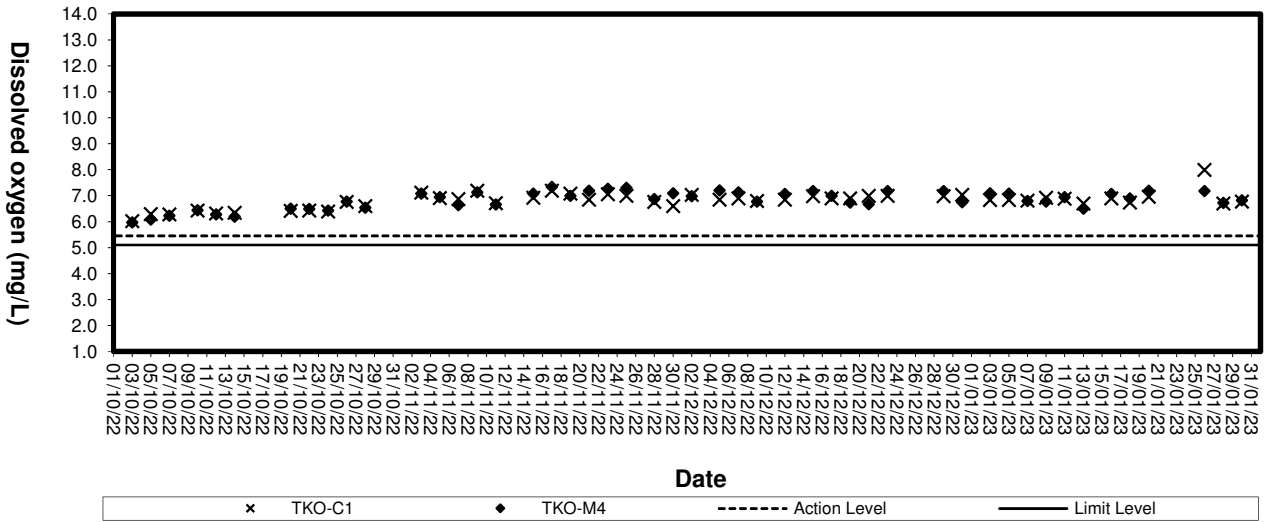


Dissolved Oxygen (Surface & Middle) at Mid-Ebb Tide

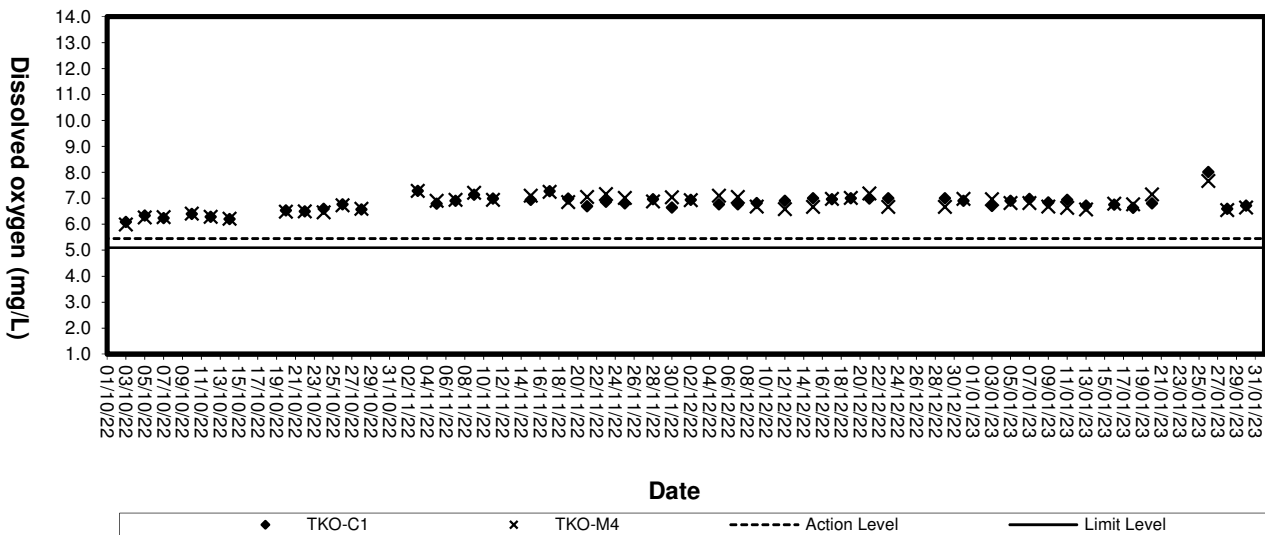


Dissolved Oxygen (Bottom) at Mid-Flood Tide

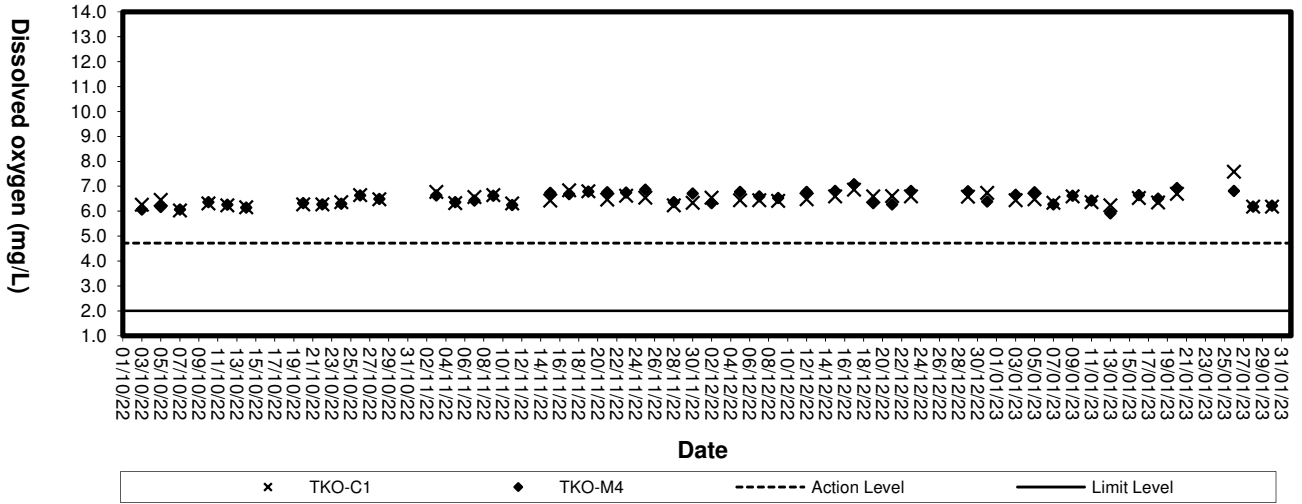


Dissolved Oxygen (Bottom) at Mid-Ebb Tide

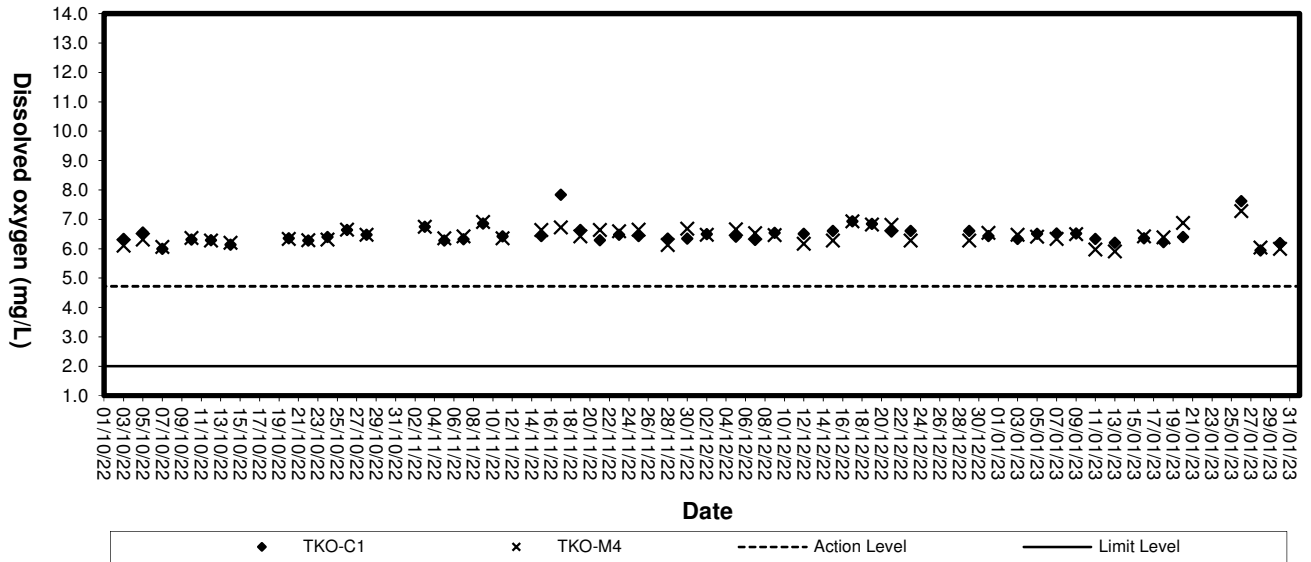


Turbidity (Depth-average) at Mid-Flood Tide

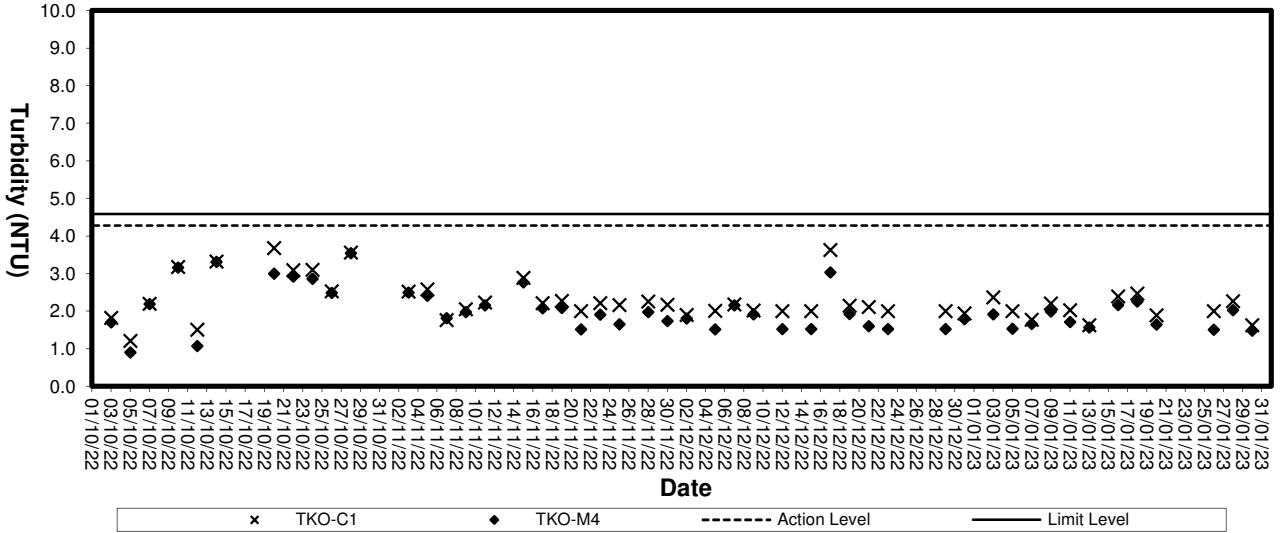


Turbidity (Depth-average) at Mid-Ebb Tide

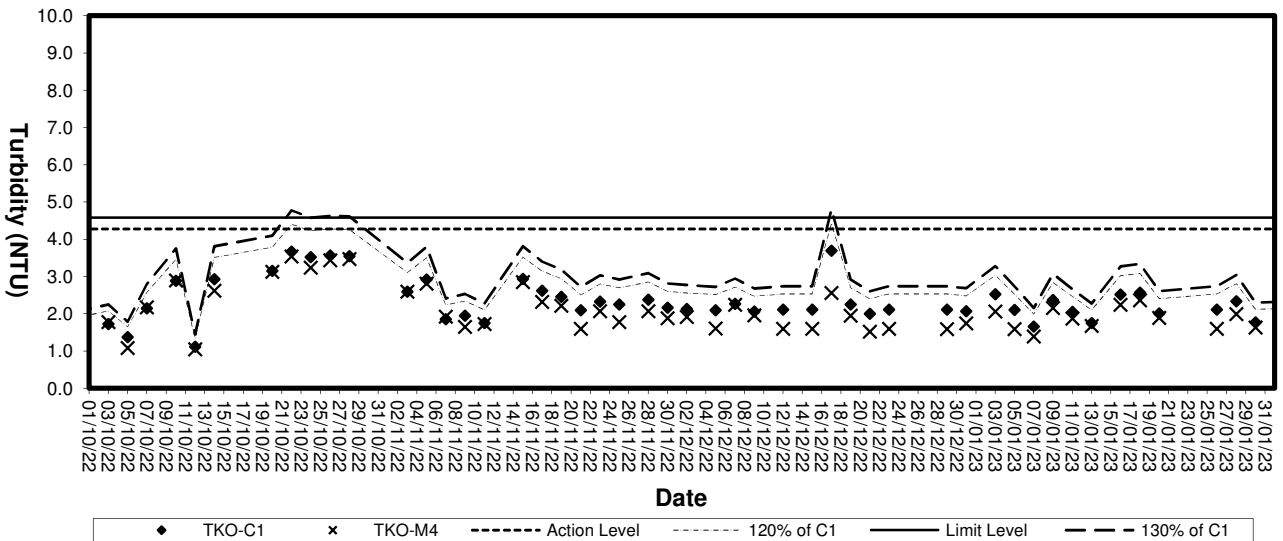

Suspended solids (Depth-average) at Mid-Flood Tide

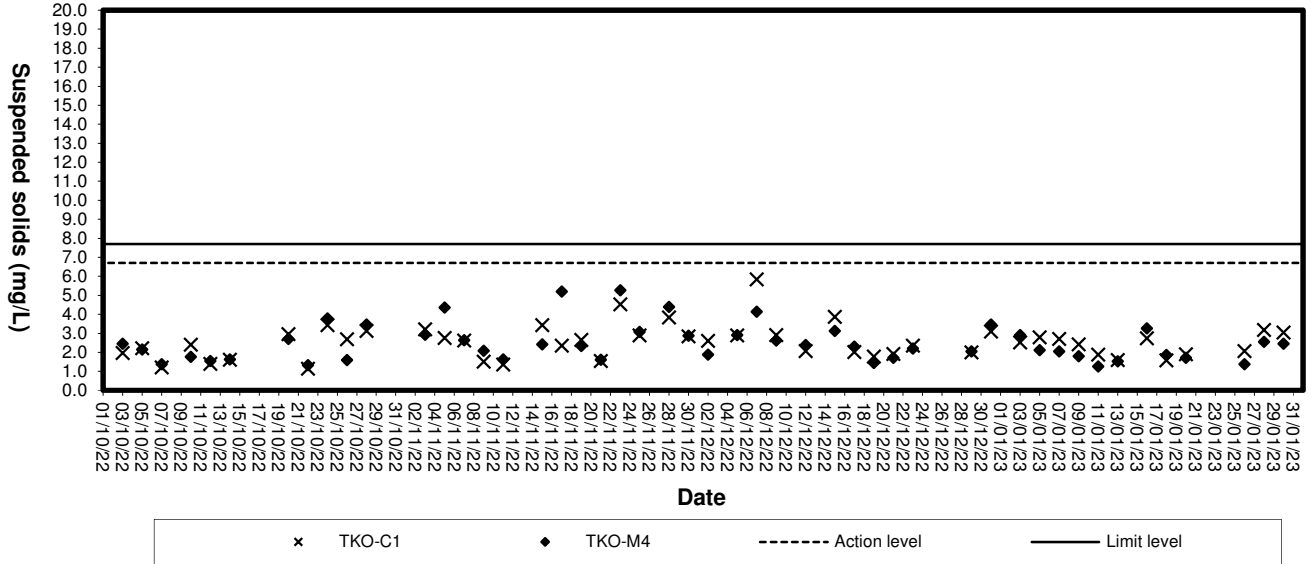

Suspended Solids (Depth-average) at Mid-Ebb Tide

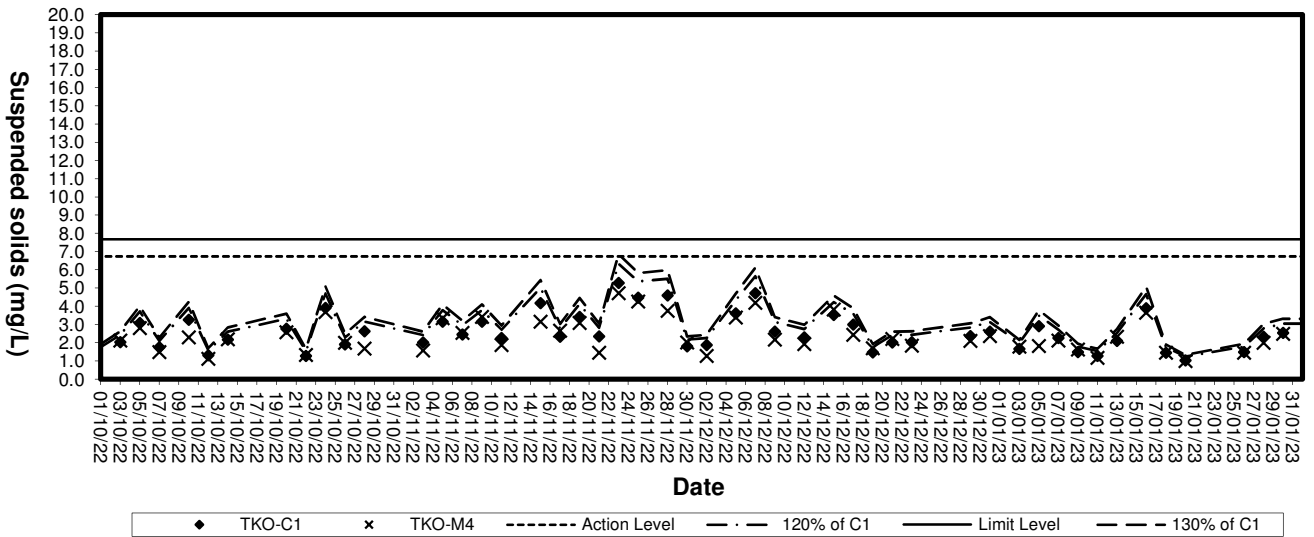

Appendix D4

Impact Marine Water Quality Monitoring Results (3RS Project)

Mid-Flood Tide

Monitoring Station : TKO-C1a

Date	Time	Ambient Temp (°C) / Weather Condition	Monitoring Depth (m)		Temp (°C)	Salinity (ppt)		Dissolved Oxygen (mg/L)			Dissolved Oxygen Saturation (%)		Turbidity (NTU)			Suspended Solids (mg/L)		
						Value	Average	Value	Average	Depth-average	Value	Average	Value	Average	Depth-average	Value	Average	Depth-average
3/1/2023	13:52:09	19	Surface	1.0	17.9	30.5	30.5	6.83	6.84	6.70	86.4	86.6	2.32	2.31	2.41	1.9	2.2	2.2
						30.5		6.85			86.7		2.30			2.5		
			Middle	9.8	17.8	30.6	30.6	6.58	6.57	83.2	83.0	2.43	2.45	2.0				
		30.6	6.55	82.8	2.46	1.8												
		/ Fine	Bottom	19.6	17.6	30.8	30.8	6.39	6.37	80.6	80.3	2.49	2.48	1.8		2.5		
						30.7		6.35		80.0		2.47		3.2				
Bottom	19.6		17.6	30.7	30.7	6.66	6.67	85.2	85.4	2.23	2.24	2.4	2.4					
5/1/2023	15:43:09	20	Surface	1.0	18.8	30.4	30.4	7.12	7.12	7.03	91.6	91.6	1.94	1.95	2.07	2.3	3.2	2.7
						30.4		7.11			91.5		1.95			4.0		
			Middle	9.8	18.6	30.6	30.6	6.95	6.95	89.2	89.2	2.04	2.04	2.5				
		30.6	6.94	89.1	2.04	2.8												
		/ Fine	Bottom	19.5	18.4	30.7	30.7	6.66	6.67	85.2	85.4	2.23	2.24	2.4		2.4		
						30.7		6.68		85.5		2.24		2.4				
Bottom	19.5		18.4	30.7	30.7	6.66	6.67	85.2	85.4	2.23	2.24	2.4	2.4					
7/1/2023	16:18:58	19	Surface	1.0	18.7	30.1	30.1	7.11	7.09	6.87	91.1	90.9	1.60	1.61	1.80	2.1	2.1	3.1
						30.1		7.07			90.6		1.62			2.1		
			Middle	9.6	18.4	30.4	30.4	6.65	6.65	84.9	84.9	1.73	1.74	4.9				
		30.4	6.64	84.8	1.75	2.4												
		/ Fine	Bottom	19.1	18.2	30.6	30.6	6.11	6.10	77.8	77.6	2.05	2.06	2.5		3.4		
						30.6		6.08		77.5		2.06		4.3				
Bottom	19.1		18.2	30.6	30.6	6.11	6.10	77.8	77.6	2.05	2.06	2.5	3.4					
9/1/2023	8:37:09	20	Surface	1.0	19.4	30.4	30.4	7.15	7.15	7.07	93.0	93.0	2.11	2.12	2.34	1.3	1.9	1.9
						30.4		7.15			93.0		2.13			2.4		
			Middle	8.8	19.2	30.5	30.5	6.97	6.98	90.4	90.6	2.33	2.34	1.9				
		30.5	6.99	90.7	2.34	1.6												
		/ Fine	Bottom	17.7	19.0	30.6	30.6	6.67	6.67	86.3	86.3	2.56	2.56	2.1		2.1		
						30.6		6.67		86.3		2.55		2.0				
Bottom	17.7		19.0	30.6	30.6	6.67	6.67	86.3	86.3	2.56	2.56	2.0	2.1					
11/1/2023	9:26:00	19	Surface	1.0	18.4	28.3	28.3	6.93	6.92	6.74	87.4	87.3	1.89	1.90	2.15	1.3	1.3	1.4
						28.4		6.91			87.2		1.91			1.2		
			Middle	9.8	18.2	28.8	28.9	6.57	6.56	82.8	82.6	2.16	2.18	1.6				
		28.9	6.54	82.4	2.19	1.0												
		/ Fine	Bottom	19.5	17.9	29.2	29.2	6.25	6.24	78.5	78.3	2.38	2.39	1.5		1.6		
						29.2		6.23		78.1		2.39		1.7				
Bottom	19.5		17.9	29.2	29.2	6.25	6.24	78.5	78.3	2.38	2.39	1.5	1.6					
13/1/2023	9:58:02	20	Surface	1.0	19.0	30.0	30.0	7.02	7.00	6.82	90.5	90.2	1.52	1.54	1.73	1.4	1.7	1.9
						30.0		6.98			90.0		1.56			2.0		
			Middle	9.7	18.8	30.4	30.4	6.65	6.64	85.5	85.3	1.67	1.68	1.6				
		30.4	6.62	85.0	1.69	2.2												
		/ Fine	Bottom	19.5	18.5	30.6	30.7	6.38	6.37	81.7	81.6	1.97	1.98	2.1		2.1		
						30.7		6.36		81.5		1.99		2.1				
Bottom	19.5		18.5	30.7	30.7	6.38	6.37	81.7	81.6	1.97	1.98	2.1	2.1					
16/1/2023	11:24:05	18	Surface	1.0	17.3	29.8	29.9	6.87	6.86	6.74	85.6	85.5	2.27	2.29	2.44	2.1	3.2	3.6
						29.9		6.84			85.3		2.30			4.3		
			Middle	9.7	17.1	30.1	30.1	6.61	6.63	82.2	82.5	2.44	2.43	3.2				
		30.1	6.65	82.7	2.42	3.9												
		/ Fine	Bottom	19.3	17.0	30.2	30.2	6.45	6.44	80.1	80.0	2.63	2.61	3.6		4.1		
						30.2		6.43		79.8		2.59		4.6				
Bottom	19.3		17.0	30.2	30.2	6.45	6.44	80.1	80.0	2.63	2.61	3.6	4.1					
18/1/2023	14:23:07	18	Surface	1.0	17.1	30.2	30.2	6.76	6.78	6.70	84.1	84.3	2.46	2.45	2.52	1.1	1.5	1.6
						30.2		6.79			84.5		2.44			1.9		
			Middle	9.9	17.0	30.3	30.3	6.63	6.62	82.4	82.3	2.36	2.38	1.2				
		30.3	6.61	82.1	2.39	1.6												
		/ Fine	Bottom	19.7	16.8	30.5	30.5	6.41	6.43	79.4	79.7	2.70	2.72	1.2		1.8		
						30.4		6.45		79.9		2.74		2.4				
Bottom	19.7		16.8	30.4	30.5	6.45	6.43	79.9	79.7	2.74	2.72	2.4	1.8					
20/1/2023	15:19:08	18	Surface	1.0	17.5	30.2	30.2	7.22	7.22	7.17	90.5	90.5	1.76	1.77	1.97	1.0	1.2	1.3
						30.2		7.21			90.4		1.77			1.4		
			Middle	10.2	17.3	30.4	30.4	7.14	7.13	89.3	89.2	1.92	1.94	1.0				
		30.4	7.12	89.0	1.95	2.0												
		/ Fine	Bottom	20.3	17.1	30.6	30.6	6.85	6.85	85.4	85.4	2.19	2.20	1.4		1.3		
						30.6		6.85		85.4		2.21		1.2				
Bottom	20.3		17.1	30.6	30.6	6.85	6.85	85.4	85.4	2.21	2.20	1.2	1.3					
26/1/2023	10:43:03	17	Surface	1.0	15.9	30.2	30.2	8.22	8.23	8.14	99.9	100.0	2.04	2.05	2.18	1.0	1.0	1.3
						30.2		8.24			100.1		2.06			1.0		
			Middle	9.8	15.7	30.4	30.4	8.05	8.05	97.6	97.5	2.14	2.15	1.4				
		30.4	8.04	97.4	2.15	1.5												
		/ Fine	Bottom	19.5	15.5	30.5	30.5	7.76	7.77	93.7	93.9	2.33	2.35	1.7		1.5		
						30.5		7.78		94.0		2.36		1.3				
Bottom	19.5		15.5	30.5	30.5	7.76	7.77	93.7	93.9	2.33	2.35	1.7	1.5					
28/1/2023	11:18:09	17	Surface	1.0	16.4	30.2	30.2	7.03	7.02	6.88	86.3	86.1	2.13	2.14	2.35	1.4	1.8	2.3
						30.2		7.01			86.0		2.14			2.1		
			Middle	9.8	16.2	30.5	30.5	6.76	6.75	82.8	82.5	2.36	2.36	2.1				
		30.5	6.73	82.3	2.36	2.6												
		/ Fine	Bottom	19.5	15.9	30.8	30.8	6.28	6.27	76.6	76.4	2.55	2.56	2.5		2.7		
						30.8		6.25		76.2		2.57		2.9				
Bottom	19.5		15.9	30.8	30.8	6.28	6.27	76.6	76.4	2.55	2.56	2.5	2.7					
30/1/2023	11:52:04	19	Surface	1.0	18.6	30.2	30.2	7.15	7.14	6.89	91.5	91.2	1.50	1.52	1.79	2.9	2.4	2.3
						30.2		7.12			91.0		1.54			2.3		
			Middle	9.8	18.3	30.7	30.7	6.66	6.64	85.1	84.8	1.84	1.83	2.4				
		30.7	6.62	84.5	1.81	2.8												
		/ Fine	Bottom	19.6	18.0	31.3	31.3	6.15	6.14	78.3	78.1	2.01	2.04	1.9		2.0		
						31.3		6.12		77.8		2.06		2.1				
Bottom	19.6		18.0	31.3	31.3	6.15	6.14	78.3	78.1	2.01	2.04	1.9	2.0					

Remark: The SS value below 1.0 mg/L is reported as "1.0" mg/L and highlighted in yellow in the table.

Mid-Flood Tide

Monitoring Station : TKO-M4a

Date	Time	Ambient Temp (°C) / Weather Condition	Monitoring Depth (m)		Temp (°C)	Salinity (ppt)		Dissolved Oxygen (mg/L)			Dissolved Oxygen Saturation (%)		Turbidity (NTU)			Suspended Solids (mg/L)		
						Value	Average	Value	Average	Depth-average	Value	Average	Value	Average	Depth-average	Value	Average	Depth-average
3/1/2023	14:14:06	19	Surface	1.0	17.9	30.6	30.7	7.17	7.16	7.04	90.8	90.7	2.46	2.47	2.55	1.1	1.7	2.3
						30.7		7.14			90.5		2.47			2.2		
			Middle	9.2	17.7	30.8	30.8	6.91	6.93		87.3	87.6	2.58	2.58		2.5	2.6	
		/ Fine	Bottom	18.5	17.6	30.8	30.9	6.63	6.62		83.7	83.6	2.60	2.60		3.1	2.8	
						30.9		6.61			83.4		2.59			2.4		
						30.8		6.63			81.5		2.33			3.2		
5/1/2023	16:05:07	20	Surface	1.0	18.8	30.5	30.5	6.85	6.86	6.73	88.2	88.4	2.03	2.04	2.19	3.3	2.8	2.7
						30.5		6.87			88.5		2.04			2.3		
			Middle	9.2	18.6	30.7	30.7	6.60	6.59		84.8	84.7	2.18	2.18		2.5	2.6	
		/ Fine	Bottom	18.4	18.4	30.7	30.8	6.58	6.38		84.5	81.6	2.18	2.35		2.6	2.8	
						30.8		6.37			81.5		2.33			3.2		
						30.8		6.38			81.6		2.37			2.3		
7/1/2023	16:30:58	19	Surface	1.0	18.7	30.0	30.0	7.15	7.14	6.94	91.6	91.4	1.76	1.77	1.98	2.7	2.6	2.4
						30.0		7.12			91.2		1.78			2.5		
			Middle	9.0	18.5	30.3	30.3	6.75	6.74		86.3	86.1	1.99	2.00		2.4	2.2	
		/ Fine	Bottom	17.9	18.2	30.3	30.5	6.73	6.33		85.9	80.5	2.01	2.16		1.9	2.5	
						30.5		6.34			80.7		2.16			2.5		
						30.5		6.31			80.3		2.16			2.5		
9/1/2023	8:56:03	20	Surface	1.0	19.4	30.4	30.4	7.22	7.23	7.15	94.0	94.1	2.16	2.18	2.33	1.8	2.1	2.0
						30.4		7.23			94.1		2.19			2.3		
			Middle	7.7	19.2	30.5	30.5	7.08	7.08		91.9	91.8	2.29	2.30		1.9	1.8	
		/ Fine	Bottom	15.4	19.0	30.5	30.6	7.07	6.73		91.7	87.0	2.31	2.50		1.7	2.3	
						30.6		6.72			86.9		2.51			2.5		
						30.6		6.73			87.0		2.49			2.0		
11/1/2023	9:47:01	19	Surface	1.0	18.3	28.4	28.4	7.14	7.13	7.00	89.9	89.7	1.73	1.76	2.03	1.1	1.1	1.4
						28.4		7.11			89.5		1.78			1.1		
			Middle	9.2	18.1	28.8	28.8	6.89	6.88		86.7	86.5	2.05	2.06		1.3	1.5	
		/ Fine	Bottom	18.3	17.8	28.8	29.1	6.86	6.33		86.3	79.3	2.07	2.29		1.6	1.7	
						29.1		6.34			79.4		2.28			1.8		
						29.1		6.31			79.1		2.29			1.5		
13/1/2023	10:21:04	20	Surface	1.0	19.1	30.2	30.2	7.08	7.06	6.86	91.5	91.2	1.48	1.49	1.62	1.7	1.8	1.8
						30.2		7.04			91.0		1.49			1.8		
			Middle	9.0	18.9	30.5	30.6	6.67	6.65		86.1	85.8	1.52	1.54		1.8	1.5	
		/ Fine	Bottom	18.1	18.6	30.6	30.8	6.63	6.34		85.6	81.5	1.55	1.84		1.2	2.1	
						30.8		6.35			81.6		1.83			2.1		
						30.8		6.33			81.3		1.84			2.1		
16/1/2023	11:45:03	18	Surface	1.0	17.3	30.0	30.0	7.20	7.22	7.08	89.8	90.1	2.16	2.17	2.25	4.3	4.0	3.9
						29.9		7.24			90.3		2.18			3.7		
			Middle	9.2	17.2	30.1	30.2	6.93	6.95		86.7	86.8	2.11	2.09		3.9	4.1	
		/ Fine	Bottom	18.5	17.1	30.2	30.3	6.96	6.71		86.8	83.6	2.07	2.48		4.2	3.5	
						30.3		6.70			83.4		2.49			4.2		
						30.3		6.72			83.7		2.46			2.8		
18/1/2023	14:44:03	18	Surface	1.0	16.9	30.1	30.2	6.93	6.92	6.82	85.8	85.7	2.65	2.64	2.69	2.2	1.7	1.8
						30.2		6.91			85.6		2.62			1.2		
			Middle	9.2	16.7	30.4	30.4	6.74	6.73		83.3	83.1	2.55	2.57		1.5	1.5	
		/ Fine	Bottom	18.5	16.6	30.3	30.5	6.71	6.48		82.9	80.0	2.59	2.85		1.5	2.1	
						30.5		6.50			80.2		2.84			1.5		
						30.5		6.46			79.7		2.86			2.7		
20/1/2023	15:38:09	18	Surface	1.0	17.5	30.2	30.2	6.99	7.00	6.86	87.6	87.8	1.93	1.93	2.07	1.3	1.2	1.4
						30.2		7.01			87.9		1.93			1.0		
			Middle	9.4	17.3	30.4	30.5	6.71	6.72		83.9	84.1	2.07	2.08		1.2	1.1	
		/ Fine	Bottom	18.7	17.2	30.5	30.5	6.73	6.94		84.2	86.7	2.09	2.20		1.0	1.8	
						30.5		6.94			86.7		2.21			2.1		
						30.5		6.94			86.7		2.19			1.5		
26/1/2023	11:06:05	17	Surface	1.0	16.0	30.4	30.4	7.95	7.96	7.84	96.9	97.1	2.12	2.13	2.33	1.1	1.3	1.6
						30.4		7.97			97.2		2.13			1.5		
			Middle	9.4	15.8	30.6	30.6	7.70	7.71		93.6	93.8	2.31	2.33		1.5	1.4	
		/ Fine	Bottom	18.8	15.6	30.6	30.7	7.72	7.48		93.9	90.7	2.34	2.55		1.2	2.2	
						30.7		7.47			90.5		2.54			3.0		
						30.7		7.49			90.8		2.55			1.3		
28/1/2023	11:39:07	17	Surface	1.0	16.5	30.6	30.6	6.87	6.86	6.60	84.7	84.6	2.20	2.22	2.42	2.4	2.7	2.7
						30.6		6.85			84.4		2.23			3.0		
			Middle	9.5	16.3	30.9	30.9	6.34	6.33		78.0	77.8	2.41	2.42		2.1	2.4	
		/ Fine	Bottom	18.9	16.1	30.9	31.1	6.32	5.99		77.6	73.4	2.43	2.64		2.7	3.0	
						31.1		6.01			73.7		2.62			2.9		
						31.1		5.97			73.1		2.65			3.0		
30/1/2023	12:11:19	19	Surface	1.0	18.5	30.5	30.5	7.07	7.05	6.80	90.5	90.3	1.42	1.44	1.79	2.0	2.1	2.4
						30.5		7.03			90.0		1.46			2.2		
			Middle	9.1	18.3	30.8	30.8	6.58	6.56		84.1	83.7	1.90	1.91		2.6	2.4	
		/ Fine	Bottom	18.3	18.1	30.8	31.1	6.53	6.19		83.4	78.8	1.92	2.02		2.2	2.7	
						31.1		6.24			79.6		2.03			2.5		
						31.1		6.13			78.0		2.01			2.9		

Remark: The SS value below 1.0 mg/L is reported as "1.0" mg/L and highlighted in yellow in the table.

Mid-Flood Tide

Monitoring Station : TKO-M5

Date	Time	Ambient Temp (°C) / Weather Condition	Monitoring Depth (m)		Temp (°C)	Salinity (ppt)		Dissolved Oxygen (mg/L)			Dissolved Oxygen Saturation (%)		Turbidity (NTU)			Suspended Solids (mg/L)		
						Value	Average	Value	Average	Depth-average	Value	Average	Value	Average	Depth-average	Value	Average	Depth-average
3/1/2023	14:37:09	19	Surface	1.0	18.2	30.6	30.6	7.08	7.07	6.86	90.2	90.1	2.45	2.47	2.61	2.4	2.0	1.5
						30.6		7.06			89.9		2.49			1.5		
			30.7	6.67	84.7	2.64	1.3											
		Middle	6.3	18.0	30.7	30.7	6.64	6.66	84.3	84.5	2.60	2.62	1.4	1.4				
					30.8		6.33		80.3		2.71		1.4					
		Bottom	12.6	17.9	30.9	30.9	6.37	6.35	80.8	80.6	2.74	2.73	1.2	1.3				
30.9	6.37				80.8		2.74		1.2									
5/1/2023	16:27:09	20	Surface	1.0	18.8	30.2	30.2	6.64	6.63	6.56	85.3	85.2	2.12	2.13	2.23	2.7	2.5	2.5
						30.2		6.62			85.1		2.13			2.3		
			30.4	6.49	83.2	2.21	2.3											
		Middle	6.4	18.6	30.4	30.4	6.48	6.49	83.1	83.2	2.22	2.22	2.9	2.6				
					30.5		6.13		78.3		2.34		2.3					
		Bottom	12.9	18.4	30.5	30.5	6.12	6.13	78.2	78.3	2.37	2.36	2.2	2.3				
30.5	6.12				78.2		2.37		2.2									
7/1/2023	16:52:10	19	Surface	1.0	18.6	29.9	29.9	6.92	6.90	6.75	88.4	88.2	1.80	1.81	2.07	2.1	2.5	2.6
						29.9		6.88			87.9		1.81			2.8		
			30.3	6.61	84.3	2.03	1.2											
		Middle	6.2	18.4	30.3	30.3	6.60	6.61	84.1	84.2	2.05	2.04	2.4	1.8				
					30.5		6.17		78.4		2.36		3.6					
		Bottom	12.4	18.1	30.5	30.5	6.16	6.17	78.3	78.3	2.37	2.37	3.3	3.5				
30.5	6.16				78.3		2.37		3.3									
9/1/2023	09:15:03	20	Surface	1.0	19.5	30.5	30.5	6.97	6.96	6.84	90.9	90.8	2.35	2.36	2.46	2.0	1.8	1.5
						30.5		6.95			90.7		2.37			1.5		
			30.5	6.71	87.2	2.44	1.4											
		Middle	7.4	19.3	30.5	30.5	6.74	6.73	87.6	87.4	2.47	2.46	1.0	1.2				
					30.6		6.64		85.9		2.55		1.7					
		Bottom	14.8	19.0	30.5	30.6	6.62	6.63	85.6	85.8	2.55	2.55	1.6	1.7				
30.5	6.62				85.6		2.55		1.6									
11/1/2023	10:09:03	19	Surface	1.0	18.3	28.0	28.0	6.99	6.98	6.77	87.8	87.7	1.84	1.84	2.04	2.2	1.8	1.4
						28.1		6.97			87.6		1.83			1.3		
			28.4	6.58	82.4	2.03	1.2											
		Middle	6.3	18.0	28.4	28.4	6.54	6.56	81.9	82.2	2.05	2.04	1.2	1.2				
					28.7		6.13		76.5		2.25		1.3					
		Bottom	12.6	17.7	28.7	28.7	6.10	6.12	76.1	76.3	2.24	2.25	1.0	1.2				
28.7	6.10				76.1		2.24		1.0									
13/1/2023	10:44:07	20	Surface	1.0	18.9	29.9	29.9	6.74	6.74	6.58	86.6	86.5	1.65	1.66	1.81	1.6	1.7	1.6
						29.9		6.73			86.3		1.67			1.8		
			30.2	6.42	82.3	1.74	1.6											
		Middle	6.3	18.7	30.2	30.2	6.41	6.42	82.2	82.3	1.75	1.75	1.3	1.5				
					30.5		5.94		76.0		2.02		1.8					
		Bottom	12.6	18.5	30.5	30.5	5.92	5.93	75.6	75.8	2.03	2.03	1.5	1.7				
30.5	5.92				75.6		2.03		1.5									
16/1/2023	12:07:03	18	Surface	1.0	17.1	29.9	29.9	6.79	6.78	6.61	84.3	84.2	2.35	2.33	2.51	4.7	4.3	4.7
						29.9		6.77			84.1		2.31			3.8		
			30.1	6.42	79.5	2.47	4.3											
		Middle	6.4	16.9	30.0	30.1	6.46	6.44	80.0	79.8	2.49	2.48	5.3	4.8				
					30.2		6.27		77.6		2.71		4.8					
		Bottom	12.8	16.8	30.2	30.2	6.24	6.26	77.2	77.4	2.74	2.73	5.2	5.0				
30.2	6.24				77.2		2.74		5.2									
18/1/2023	15:07:08	18	Surface	1.0	17.2	30.3	30.3	7.23	7.22	7.08	90.2	90.1	2.55	2.56	2.70	1.4	1.3	1.3
						30.2		7.21			89.9		2.57			1.2		
			30.4	6.96	86.5	2.65	1.8											
		Middle	6.3	17.0	30.4	30.4	6.93	6.95	86.2	86.4	2.61	2.63	1.2	1.6				
					30.6		6.73		83.4		2.90		1.2					
		Bottom	12.7	16.8	30.5	30.6	6.77	6.75	83.9	83.7	2.93	2.92	1.1	1.2				
30.5	6.77				83.9		2.93		1.1									
20/1/2023	16:02:03	18	Surface	1.0	17.5	30.3	30.3	6.82	6.82	6.77	85.6	85.6	2.02	2.03	2.17	1.0	1.4	1.2
						30.3		6.82			85.6		2.04			1.8		
			30.4	6.73	84.3	2.14	1.0											
		Middle	7.8	17.4	30.4	30.4	6.71	6.72	84.1	84.2	2.12	2.13	1.0	1.0				
					30.4		6.65		83.2		2.34		1.2					
		Bottom	15.7	17.3	30.5	30.5	6.65	6.65	83.2	83.2	2.36	2.35	1.0	1.1				
30.5	6.65				83.2		2.36		1.0									
26/1/2023	11:30:09	17	Surface	1.0	15.8	30.3	30.3	7.74	7.75	7.68	93.9	94.1	2.22	2.21	2.39	1.6	1.6	1.4
						30.3		7.76			94.2		2.20			1.5		
			30.5	7.59	91.9	2.31	1.1											
		Middle	6.4	15.6	30.5	30.5	7.61	7.60	92.1	92.0	2.35	2.33	1.6	1.4				
					30.6		7.22		87.2		2.61		1.4					
		Bottom	12.9	15.4	30.6	30.6	7.23	7.23	87.2	87.2	2.63	2.62	1.1	1.3				
30.6	7.23				87.2		2.63		1.1									
28/1/2023	12:01:07	17	Surface	1.0	16.5	30.4	30.4	7.12	7.10	6.96	87.7	87.4	2.09	2.10	2.39	2.5	2.9	2.2
						30.4		7.08			87.2		2.11			3.3		
			30.5	6.84	83.9	2.39	1.2											
		Middle	6.5	16.3	30.6	30.6	6.81	6.83	83.6	83.8	2.42	2.41	1.8	1.5				
					30.8		6.45		79.1		2.64		2.5					
		Bottom	12.9	16.2	30.8	30.8	6.42	6.44	78.6	78.9	2.66	2.65	1.9	2.2				
30.8	6.42				78.6		2.66		1.9									
30/1/2023	12:31:21	19	Surface	1.0	18.4	30.2	30.2	6.90	6.89	6.65	88.0	87.9	1.65	1.66	1.97	2.3	2.4	2.9
						30.2		6.88			87.7		1.67			2.5		
			30.6	6.43	81.9	2.01	3.8											
		Middle	6.3	18.2	30.6	30.6	6.37	6.40	81.0	81.4	1.98	2.00	2.8	3.3				
					31.0		6.00		76.2		2.23		3.3					
		Bottom	12.6	17.9	31.1	31.0	5.97	5.99	75.8	76.0	2.27	2.25	2.5	2.9				
31.1	5.97				75.8		2.27		2.5									

Remark: The SS value below 1.0 mg/L is reported as "1.0" mg/L and highlighted in yellow in the table.

Mid-Ebb Tide

Monitoring Station : TKO-C1a

Date	Time	Ambient Temp (°C) / Weather Condition	Monitoring Depth (m)		Temp (°C)	Salinity (ppt)		Dissolved Oxygen (mg/L)			Dissolved Oxygen Saturation (%)		Turbidity (NTU)			Suspended Solids (mg/L)			
						Value	Average	Value	Average	Depth-average	Value	Average	Value	Average	Depth-average	Value	Average	Depth-average	
3/1/2023	8:53:07	19	Surface	1.0	17.9	30.4	30.5	6.77	6.76	6.59	85.6	85.5	2.47	2.46	2.54	2.4	2.3	2.0	
				30.5	6.75	85.4		2.45			2.1								
			Middle	9.7	17.7	30.6	6.44	81.3	2.49		2.48	2.2							
		/ Fine	Bottom	19.5	17.6	30.7	30.7	6.13	6.15		77.2	77.4	2.66	2.68		1.7	1.4		1.1
				30.7	6.16	77.6		2.70			1.1								
			Surface	1.0	18.8	30.5	30.5	6.82	6.83		87.8	87.9	2.06	2.07		2.3	2.9		2.24
30.5	6.83	87.9	2.07	3.5															
Middle	9.6	18.6	30.7	30.7	6.65	6.65	85.4	85.4	2.26	2.28	2.6	2.6	2.5						
/ Fine	Bottom	19.3	18.4		30.8		30.8		6.21		6.21		79.5	79.5	2.38	2.39	2.1	2.4	
		30.8	6.20	79.4	2.40	2.1													
	7/1/2023	11:53:02	19	Surface	1.0	18.5	29.9	29.9	7.23	7.22	7.10	92.2	92.1	1.41	1.43	1.67	4.8	4.1	
29.9					7.21	92.0	1.44		3.3										
Middle				9.7	18.3	30.2	30.2	6.98	6.98	88.8		88.7	1.63	1.64	4.9		3.7	2.5	
30.2			6.97	88.5	1.65	2.5													
/ Fine			Bottom	19.5	18.0	30.4	30.4	6.67	6.66	84.5		84.4	1.92	1.93	3.9		3.6	3.2	
				30.4	6.64	84.2		1.94		3.2									
	Surface	1.0	19.5	30.5	30.5	7.05	7.05	92.0	92.0	2.26	2.25	2.6	2.6	2.43	2.6	2.0	2.2		
30.5	7.04	91.9	2.24	2.6															
Middle	8.5	19.3	30.5	30.5	6.92	6.93	89.9	90.1	2.41	2.40	1.4	2.0	2.5						
30.5	6.94	90.2	2.39		1.9														
/ Fine	Bottom	17.0	19.0	30.6	30.6	6.71	6.71	86.8	86.8	2.63	2.63	2.1	2.0		2.1				
		30.6	6.71	86.8		2.63		2.1											
	Surface	1.0	18.6	28.3	28.3	6.96	6.95	88.1	87.9	1.96	1.98	1.4	1.3	2.21	1.1	1.4	1.5		
28.3	6.93	87.7	1.99	1.1															
Middle	9.6	18.4	28.5	28.6	6.55	6.54	82.7	82.5	2.14	2.15	1.0	1.4	1.7						
28.6	6.53	82.3	2.16		1.7														
/ Fine	Bottom	19.3	18.1	29.0	29.0	6.07	6.06	76.4	76.2	2.48	2.50	1.5	1.8		2.0				
		29.0	6.04	76.1		2.52		2.0											
	Surface	1.0	19.1	30.2	30.2	7.06	7.04	91.3	91.0	1.51	1.52	1.3	1.7	2.0					
30.2	7.02	90.8	1.53	2.0															
/ Fine	Middle	9.6	18.8	30.6	30.6	6.62	6.61	85.3	85.1	1.74	1.75	2.6	2.1	1.5					
		30.6	6.59	84.9		1.76		1.5											
	Bottom	19.1	18.6	30.9	30.9	6.06	6.05	77.9	77.6	2.01	2.03	1.2	1.8	2.3					
30.9	6.03	77.4	2.04	2.3															
16/1/2023	17:54:08	18	Surface	1.0	17.2	29.8	29.8	6.79	6.78	6.64	84.4	84.3	2.41	2.40	2.56	2.2	3.2	4.2	
				29.8	6.77	84.1		2.38			4.2								
			Middle	9.5	17.1	30.0	30.0	6.48	6.49		80.5	80.7	2.56	2.58		4.8	4.6		4.4
		30.0	6.50	80.8	2.59	4.4													
		/ Fine	Bottom	19.0	16.9	30.1	30.2	6.22	6.24		77.0	77.3	2.72	2.71		4.9	4.9		4.9
				30.2	6.26	77.6		2.70			4.9								
Surface	1.0		17.0	30.1	30.2	6.63	6.62	82.3	82.2	2.59	2.57	1.5	2.0	2.68	2.4	1.4	2.2		
30.2	6.60	82.0	2.55	2.4															
Middle	9.7	16.9	30.3	30.3	6.44	6.46	79.9	80.1	2.64	2.65	1.4	1.4	1.4						
30.3	6.47	80.2	2.66		1.4														
/ Fine	Bottom	19.4	16.8	30.4	30.4	6.18	6.20	76.5	76.8	2.84	2.83	4.5	3.3		2.0				
		30.4	6.22	77.0		2.81		2.0											
	Surface	1.0	17.3	30.1	30.1	7.13	7.13	89.0	89.0	2.05	2.05	1.0	1.2	2.26	1.3	1.2	1.1		
30.1	7.12	88.9	2.05	1.2															
Middle	9.9	17.1	30.3	30.3	6.89	6.88	85.9	85.7	2.25	2.25	1.2	1.2	1.1						
30.3	6.87	85.5	2.24		1.1														
/ Fine	Bottom	19.7	16.9	30.5	30.5	6.54	6.55	81.2	81.3	2.47	2.47	1.0	1.1		1.1				
		30.5	6.55	81.3		2.47		1.1											
	Surface	1.0	15.7	30.4	30.4	7.64	7.65	92.6	92.7	2.06	2.06	1.4	1.6	2.24	1.8	1.4	1.8		
30.4	7.65	92.7	2.06	1.8															
Middle	9.6	15.5	30.6	30.6	7.43	7.42	89.8	89.7	2.26	2.28	1.2	1.4	1.5						
30.6	7.41	89.6	2.29		1.5														
/ Fine	Bottom	19.2	15.3	30.7	30.7	7.04	7.04	84.8	84.8	2.38	2.39	2.5	2.4		2.3				
		30.7	7.04	84.8		2.40		2.3											
	Surface	1.0	16.6	30.5	30.5	6.74	6.74	83.2	83.0	2.23	2.24	2.3	2.4	2.54	2.5	2.6	2.7		
30.5	6.73	82.9	2.25	2.5															
Middle	9.6	16.3	30.9	30.9	6.24	6.22	76.8	76.5	2.64	2.65	3.1	2.6	2.1						
30.9	6.20	76.3	2.66		2.1														
/ Fine	Bottom	19.3	16.1	31.2	31.2	5.85	5.84	71.8	71.7	2.73	2.74	2.8	3.2		3.5				
		31.2	5.83	71.6		2.74		3.5											
	Surface	1.0	18.6	30.3	30.3	7.05	7.05	90.3	90.2	1.69	1.67	1.8	2.0	1.98	2.1	2.2	2.1		
30.3	7.04	90.2	1.65	2.1															
Middle	9.6	18.3	30.6	30.6	6.56	6.54	83.7	83.5	2.03	2.05	2.2	2.2	2.1						
30.6	6.52	83.2	2.06		2.1														
/ Fine	Bottom	19.3	18.1	31.2	31.2	6.17	6.16	78.7	78.5	2.23	2.23	1.9	2.1		2.3				
		31.2	6.14	78.2		2.23		2.3											

Remark: The SS value below 1.0 mg/L is reported as "1.0" mg/L and highlighted in yellow in the table.

Mid-Ebb Tide

Monitoring Station : TKO-M4a

Date	Time	Ambient Temp (°C) / Weather Condition	Monitoring Depth (m)		Temp (°C)	Salinity (ppt)		Dissolved Oxygen (mg/L)			Dissolved Oxygen Saturation (%)		Turbidity (NTU)			Suspended Solids (mg/L)		
						Value	Average	Value	Average	Depth-average	Value	Average	Value	Average	Depth-average	Value	Average	Depth-average
3/1/2023	9:15:09	19	Surface	1.0	17.8	30.6	30.6	6.92	6.94	6.83	87.5	87.8	2.22	2.23	2.47	2.7	2.4	2.2
						30.6		6.96			88.0		2.24			2.0		
			Middle	9.1	17.6	30.7	30.7	6.70	6.71	84.4	84.6	2.53	2.52	2.0				
		/ Fine	Bottom	18.1	17.5	30.7	30.9	6.72	6.50	84.7	81.8	2.50	2.66	2.4				
						30.9		6.48		81.6		2.68		2.3				
			30.8	6.51	81.9	2.64	2.0											
5/1/2023	11:04:04	20	Surface	1.0	18.8	30.4	30.4	6.84	6.84	6.69	88.0	88.0	2.20	2.20	2.37	3.5	3.2	2.6
						30.4		6.83			87.9		2.20			2.8		
			Middle	9.1	18.6	30.6	30.6	6.55	6.55	84.1	84.1	2.35	2.36	2.0				
		/ Fine	Bottom	18.1	18.4	30.6	30.7	6.55	6.31	84.1	80.6	2.37	2.55	2.3				
						30.7		6.30		80.6		2.53		3.6				
			30.7	6.32	80.6	2.56	1.5											
7/1/2023	12:11:04	19	Surface	1.0	18.6	30.1	30.1	6.95	6.94	6.77	88.9	88.8	1.36	1.37	1.58	3.0	3.4	2.7
						30.1		6.93			88.7		1.38			3.7		
			Middle	9.1	18.4	30.3	30.3	6.62	6.61	84.5	84.3	1.54	1.56	2.5				
		/ Fine	Bottom	18.1	18.1	30.3	30.5	6.59	5.99	84.1	76.1	1.57	1.82	1.9				
						30.5		6.01		76.4		1.83		2.7				
			30.5	5.97	75.9	1.81	2.0											
9/1/2023	13:36:09	20	Surface	1.0	19.5	30.5	30.5	7.11	7.13	7.06	92.8	93.0	2.31	2.30	2.44	3.0	2.4	2.2
						30.5		7.14			93.1		2.29			1.7		
			Middle	8.4	19.3	30.6	30.6	7.01	7.00	91.2	91.1	2.43	2.43	1.7				
		/ Fine	Bottom	16.8	19.0	30.6	30.7	6.99	6.82	90.9	88.2	2.42	2.59	1.9				
						30.7		6.82		88.2		2.59		2.9				
			30.6	6.81	88.1	2.59	2.9											
11/1/2023	14:41:01	19	Surface	1.0	18.4	28.3	28.3	6.89	6.88	6.77	86.9	86.8	2.07	2.07	2.28	1.4	1.7	1.6
						28.3		6.87			86.7		2.06			1.9		
			Middle	9.0	18.2	28.7	28.8	6.66	6.66	83.9	83.8	2.34	2.33	1.3				
		/ Fine	Bottom	18.0	17.9	28.8	29.3	6.65	6.24	83.8	78.3	2.31	2.46	1.5				
						29.3		6.25		78.5		2.47		1.7				
			29.3	6.22	78.2	2.45	1.9											
13/1/2023	16:20:58	20	Surface	1.0	19.1	30.2	30.2	7.10	7.08	6.87	91.7	91.4	1.58	1.59	1.83	2.1	2.0	2.0
						30.2		7.05			91.1		1.60			1.9		
			Middle	8.9	18.9	30.4	30.4	6.68	6.67	86.1	85.9	1.81	1.82	1.8				
		/ Fine	Bottom	17.9	18.6	30.5	30.7	6.65	6.21	85.8	79.7	1.82	2.07	1.6				
						30.7		6.22		79.9		2.06		1.8				
			30.7	6.20	79.6	2.08	2.8											
16/1/2023	18:16:08	18	Surface	1.0	17.3	29.9	29.9	7.09	7.10	6.92	88.4	88.5	2.29	2.27	2.40	4.7	4.2	3.7
						29.9		7.11			88.6		2.25			3.6		
			Middle	9.1	17.1	30.0	30.1	6.75	6.73	83.9	83.7	2.33	2.35	5.3				
		/ Fine	Bottom	18.1	17.0	30.1	30.2	6.71	6.56	83.4	81.5	2.36	2.59	2.9				
						30.2		6.58		81.7		2.60		2.4				
			30.2	6.54	81.2	2.58	3.2											
18/1/2023	9:17:05	18	Surface	1.0	16.9	30.2	30.2	6.79	6.81	6.69	84.1	84.3	2.73	2.72	2.84	1.5	2.3	2.0
						30.2		6.82			84.5		2.70			3.1		
			Middle	9.1	16.8	30.4	30.4	6.58	6.57	81.5	81.4	2.75	2.76	1.5				
		/ Fine	Bottom	18.1	16.7	30.4	30.5	6.56	6.36	81.2	78.7	2.77	3.03	1.9				
						30.5		6.38		78.9		3.05		2.2				
			30.5	6.34	78.4	3.01	1.8											
20/1/2023	11:10:07	18	Surface	1.0	17.3	30.1	30.1	6.82	6.82	6.72	85.1	85.1	2.20	2.20	2.42	1.3	1.3	1.2
						30.1		6.81			85.0		2.19			1.2		
			Middle	9.1	17.1	30.3	30.3	6.62	6.62	82.4	82.4	2.46	2.47	1.0				
		/ Fine	Bottom	18.1	17.0	30.3	30.5	6.62	6.48	82.4	80.6	2.47	2.60	1.1				
						30.5		6.49		80.7		2.61		1.0				
			30.5	6.46	80.4	2.58	1.3											
26/1/2023	16:16:09	17	Surface	1.0	16.0	30.6	30.6	7.94	7.93	7.79	96.9	96.8	2.20	2.20	2.37	1.7	1.6	1.6
						30.6		7.92			96.7		2.20			1.5		
			Middle	9.1	15.8	30.8	30.8	7.65	7.65	93.1	93.1	2.35	2.37	1.6				
		/ Fine	Bottom	18.2	15.6	30.8	30.9	7.65	7.41	93.1	89.9	2.38	2.53	1.3				
						30.9		7.40		89.8		2.53		1.2				
			30.9	7.42	90.0	2.53	2.0											
28/1/2023	17:41:05	17	Surface	1.0	16.7	30.7	30.7	6.97	6.96	6.73	86.3	86.1	2.26	2.27	2.63	2.8	3.0	2.7
						30.7		6.95			85.9		2.27			3.2		
			Middle	9.1	16.4	31.1	31.1	6.52	6.50	80.5	80.2	2.74	2.77	2.6				
		/ Fine	Bottom	18.2	16.2	31.1	31.4	6.48	6.02	80.0	74.1	2.79	2.86	2.7				
						31.3		6.03		74.2		2.85		2.2				
			31.4	6.01	74.0	2.86	2.9											
30/1/2023	18:10:59	19	Surface	1.0	18.5	30.5	30.5	6.89	6.87	6.55	88.2	87.9	1.50	1.52	1.88	2.4	2.1	2.2
						30.5		6.85			87.7		1.53			1.7		
			Middle	9.0	18.3	30.7	30.7	6.25	6.24	79.8	79.6	1.96	1.97	2.1				
		/ Fine	Bottom	18.1	18.0	30.7	31.2	6.22	5.95	79.4	75.9	1.98	2.16	2.4				
						31.2		5.96		75.9		2.14		2.5				
			31.2	5.94	75.6	2.17	2.2											

Remark: The SS value below 1.0 mg/L is reported as "1.0" mg/L and highlighted in yellow in the table.

Mid-Ebb Tide

Monitoring Station : TKO-M5


Date	Time	Ambient Temp (°C) / Weather Condition	Monitoring Depth (m)		Temp (°C)	Salinity (ppt)		Dissolved Oxygen (mg/L)			Dissolved Oxygen Saturation (%)		Turbidity (NTU)			Suspended Solids (mg/L)		
						Value	Average	Value	Average	Depth-average	Value	Average	Value	Average	Depth-average	Value	Average	Depth-average
3/1/2023	9:38:08	19	Surface	1.0	18.1	30.5	30.5	6.87	6.89	6.71	87.3	87.5	2.57	2.58	2.66	2.1	2.0	1.8
						30.5		6.90			87.7		2.59			1.8		
			Middle	6.2	17.9	30.6	30.6	6.55	6.53	83.0	82.7	2.68	2.67	1.3				
		/ Fine	Bottom	12.4	17.8	30.6	30.8	6.51	6.26	6.26	82.4	79.3	2.66	2.73		2.4		
						30.8		6.27			79.4		2.74			1.2		
						30.7		6.25			79.1		2.71			1.9		
5/1/2023	11:28:03	20	Surface	1.0	18.8	30.6	30.6	7.19	7.20	7.06	92.6	92.7	2.33	2.34	2.45	3.3	2.8	2.8
						30.6		7.20			92.8		2.35			2.2		
			Middle	6.3	18.6	30.8	30.8	6.92	6.92	88.9	88.9	2.49	2.49	2.8				
		/ Fine	Bottom	12.6	18.4	30.9	30.9	6.62	6.63	6.63	84.8	84.9	2.53	2.53		3.5		
						30.9		6.63			84.9		2.53			2.3		
						30.8		6.91			88.8		2.49			2.7		
7/1/2023	12:32:07	19	Surface	1.0	18.4	29.6	29.6	7.08	7.07	6.90	90.0	89.8	1.44	1.45	1.76	2.2	2.4	3.0
						29.6		7.05			89.6		1.46			2.5		
			Middle	6.3	18.2	29.9	29.9	6.73	6.73	85.4	85.3	1.79	1.80	2.6				
		/ Fine	Bottom	12.7	18.0	29.9	30.2	6.72	6.13	6.13	85.2	77.6	1.80	2.02		2.6		
						30.3		6.14			77.7		2.01			5.3		
						30.2		6.12			77.5		2.03			2.7		
9/1/2023	13:53:07	20	Surface	1.0	19.5	30.5	30.5	6.71	6.73	6.71	87.5	87.8	2.33	2.34	2.52	2.1	1.8	1.9
						30.5		6.75			88.1		2.35			1.5		
			Middle	7.1	19.4	30.6	30.6	6.69	6.68	87.2	87.1	2.59	2.59	1.5				
		/ Fine	Bottom	14.1	19.1	30.6	30.7	6.67	6.64	6.64	86.9	86.0	2.59	2.64		1.9		
						30.7		6.62			85.8		2.64			1.8		
						30.7		6.65			86.2		2.64			2.3		
11/1/2023	15:03:58	19	Surface	1.0	18.4	28.1	28.2	7.06	7.05	6.90	88.9	88.8	1.96	1.97	2.22	1.1	1.3	1.3
						28.2		7.04			88.7		1.98			1.5		
			Middle	6.2	18.2	28.5	28.5	6.77	6.75	85.1	84.8	2.22	2.23	1.0				
		/ Fine	Bottom	12.4	17.9	28.5	28.8	6.73	6.34	6.34	84.5	79.4	2.23	2.46		1.8		
						28.8		6.35			79.6		2.45			1.1		
						28.8		6.32			79.2		2.46			1.1		
13/1/2023	16:42:10	20	Surface	1.0	19.0	30.1	30.1	6.77	6.76	6.59	87.3	87.1	1.63	1.64	1.90	2.0	1.7	1.6
						30.1		6.75			86.9		1.64			1.4		
			Middle	6.2	18.8	30.4	30.4	6.42	6.43	82.6	82.7	1.89	1.91	1.6				
		/ Fine	Bottom	12.5	18.5	30.4	30.6	6.43	5.88	5.88	82.7	75.3	1.92	2.16		1.8		
						30.6		5.88			75.3		2.15			1.1		
						30.6		5.87			75.2		2.16			1.7		
16/1/2023	18:38:06	18	Surface	1.0	17.0	29.8	29.9	6.61	6.62	6.48	81.9	82.1	2.60	2.58	2.75	2.6	3.0	3.5
						29.9		6.63			82.2		2.56			3.3		
			Middle	6.3	16.8	30.0	30.0	6.34	6.33	78.3	78.2	2.73	2.74	3.6				
		/ Fine	Bottom	12.6	16.7	30.0	30.2	6.32	6.09	6.09	78.1	75.3	2.75	2.93		3.6		
						30.2		6.07			74.9		2.94			4.3		
						30.1		6.10			75.7		2.91			3.6		
18/1/2023	9:40:09	18	Surface	1.0	17.1	30.2	30.2	7.06	7.08	6.90	87.8	88.0	2.72	2.73	2.89	2.4	1.9	1.5
						30.2		7.09			88.2		2.74			1.3		
			Middle	6.2	16.9	30.4	30.4	6.75	6.73	83.8	83.5	2.83	2.82	1.0				
		/ Fine	Bottom	12.4	16.8	30.3	30.5	6.71	6.43	6.43	83.2	79.7	2.80	3.12		1.3		
						30.5		6.44			79.8		3.11			1.6		
						30.5		6.42			79.6		3.13			1.3		
20/1/2023	11:27:05	18	Surface	1.0	17.3	30.2	30.2	6.67	6.66	6.59	83.3	83.2	2.37	2.36	2.52	1.2	1.1	1.0
						30.2		6.65			83.1		2.34			1.0		
			Middle	7.7	17.2	30.3	30.3	6.52	6.52	81.3	81.3	2.57	2.57	1.0				
		/ Fine	Bottom	15.5	17.0	30.3	30.4	6.51	6.38	6.38	81.2	79.3	2.57	2.64		1.0		
						30.4		6.37			79.2		2.63			1.0		
						30.4		6.39			79.4		2.64			1.0		
26/1/2023	16:39:07	17	Surface	1.0	15.9	30.3	30.3	8.25	8.26	8.14	100.3	100.5	2.35	2.36	2.50	1.3	2.1	1.8
						30.3		8.27			100.6		2.37			2.8		
			Middle	6.3	15.7	30.5	30.5	8.02	8.02	97.3	97.3	2.49	2.50	1.9				
		/ Fine	Bottom	12.7	15.5	30.5	30.6	8.02	7.73	7.73	97.3	93.4	2.50	2.66		1.5		
						30.6		7.72			93.3		2.65			1.9		
						30.6		7.73			93.4		2.66			1.5		
28/1/2023	18:02:08	17	Surface	1.0	16.6	30.4	30.4	6.83	6.83	6.52	84.2	84.1	2.36	2.36	2.66	2.9	2.6	2.4
						30.4		6.82			84.0		2.35			2.3		
			Middle	6.4	16.3	30.6	30.7	6.22	6.21	76.4	76.2	2.71	2.72	1.9				
		/ Fine	Bottom	12.7	16.1	30.7	31.0	6.19	5.94	5.94	76.0	72.7	2.73	2.91		2.6		
						30.9		5.94			72.8		2.89			2.3		
						31.0		5.93			72.6		2.92			2.3		
30/1/2023	18:34:58	19	Surface	1.0	18.5	29.7	29.7	6.84	6.83	6.60	87.2	87.0	1.75	1.77	2.10	2.1	2.4	2.3
						29.8		6.82			86.9		1.78			2.6		
			Middle	6.2	18.3	30.3	30.3	6.37	6.36	81.1	80.9	2.12	2.16	2.4				
		/ Fine	Bottom	12.3	17.9	30.3	30.8	6.35	6.11	6.11	80.7	77.5	2.20	2.37		1.5		
						30.8		6.12			77.6		2.38			2.4		
						30.8		6.10			77.3		2.36			2.7		

Remark: The SS value below 1.0 mg/L is reported as "1.0" mg/L and highlighted in yellow in the table.


Appendix D5

Graphical Plots of Impact Marine Water Quality Monitoring Data (3RS Project)


Dissolved Oxygen (Surface & Middle) at Mid-Flood Tide (3RS project)

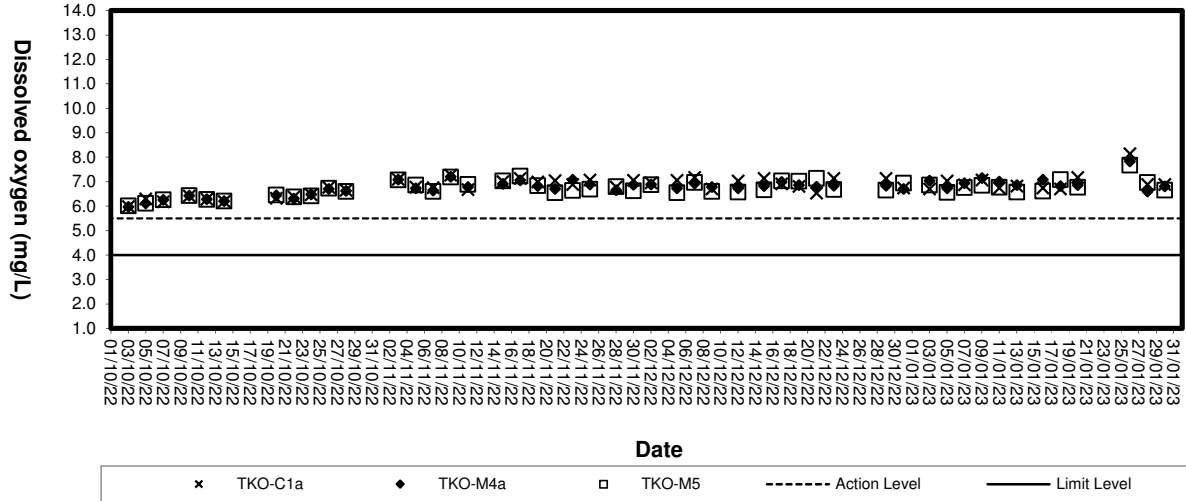


Dissolved Oxygen (Surface & Middle) at Mid-Ebb Tide (3RS project)

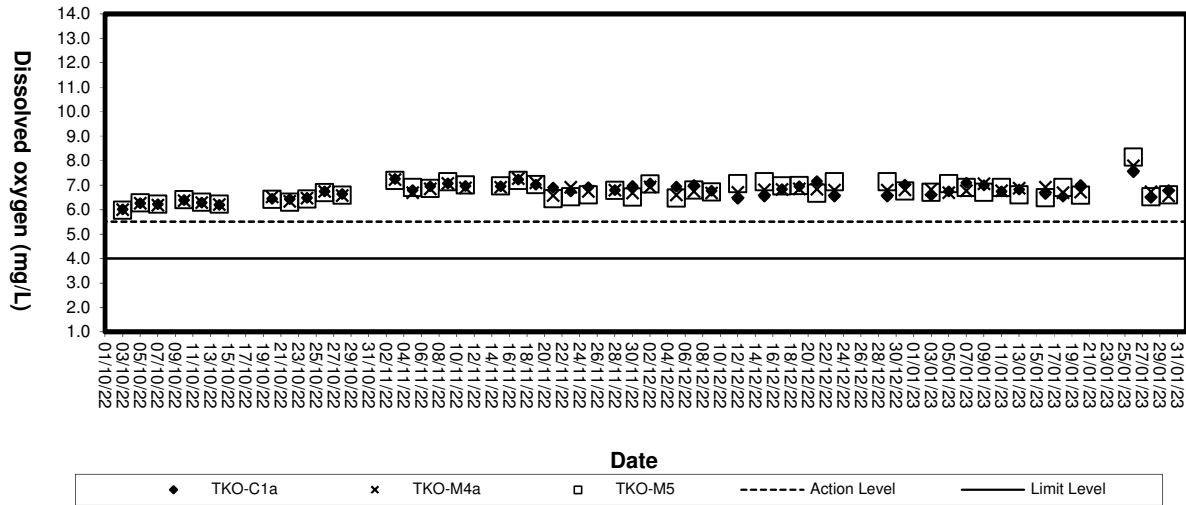


Dissolved Oxygen (Bottom) at Mid-Flood Tide (3RS project)

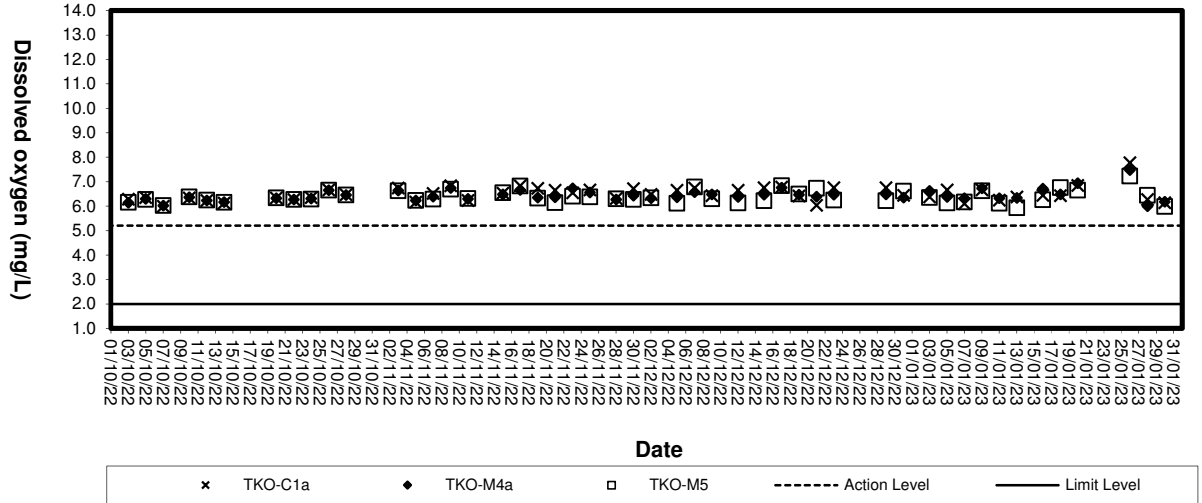


Dissolved Oxygen (Bottom) at Mid-Ebb Tide (3RS project)

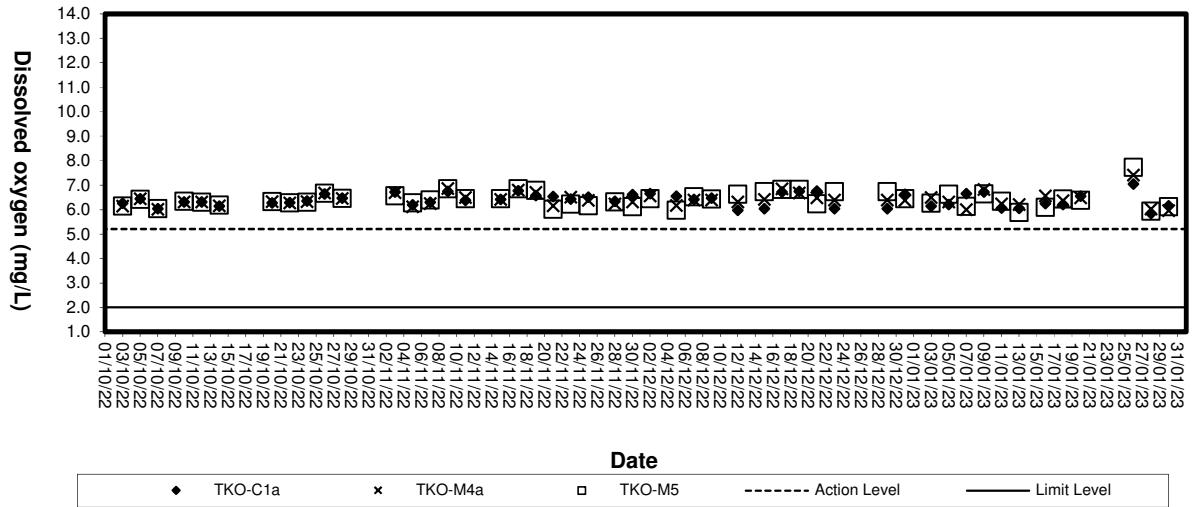


Turbidity (Depth-average) at Mid-Flood Tide (3RS project)

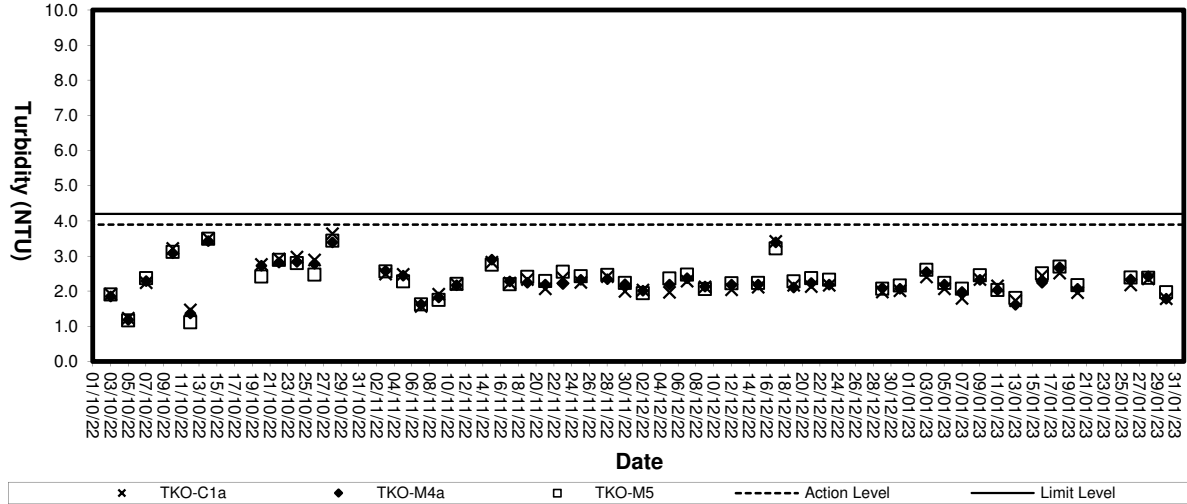


Turbidity(Depth-average) at Mid-Ebb Tide (3RS project)

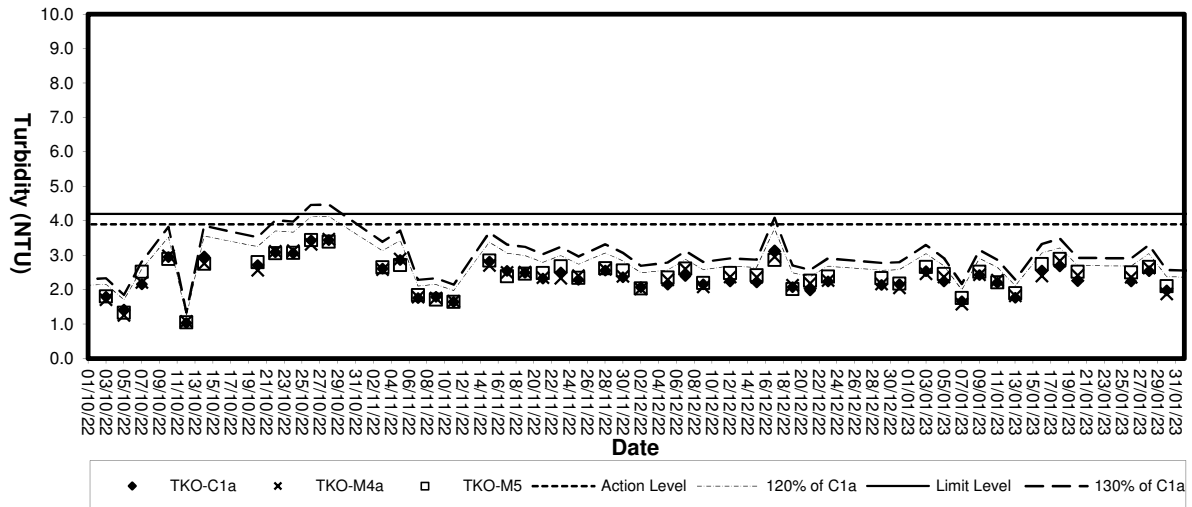

Suspended solids (Depth-average) at Mid-Flood Tide (3RS project)

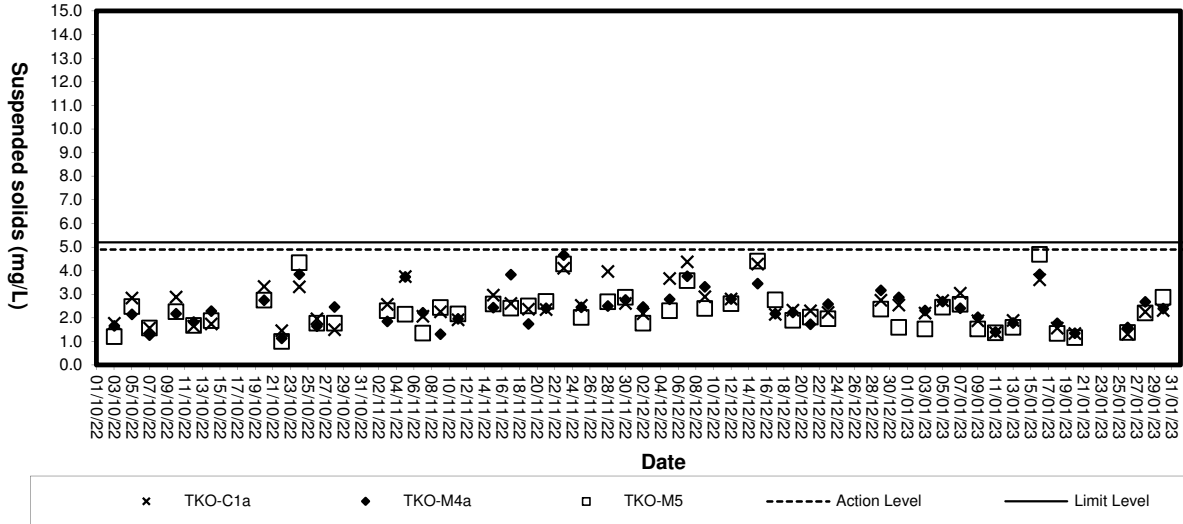

Suspended Solids (Depth-average) at Mid-Ebb Tide (3RS project)

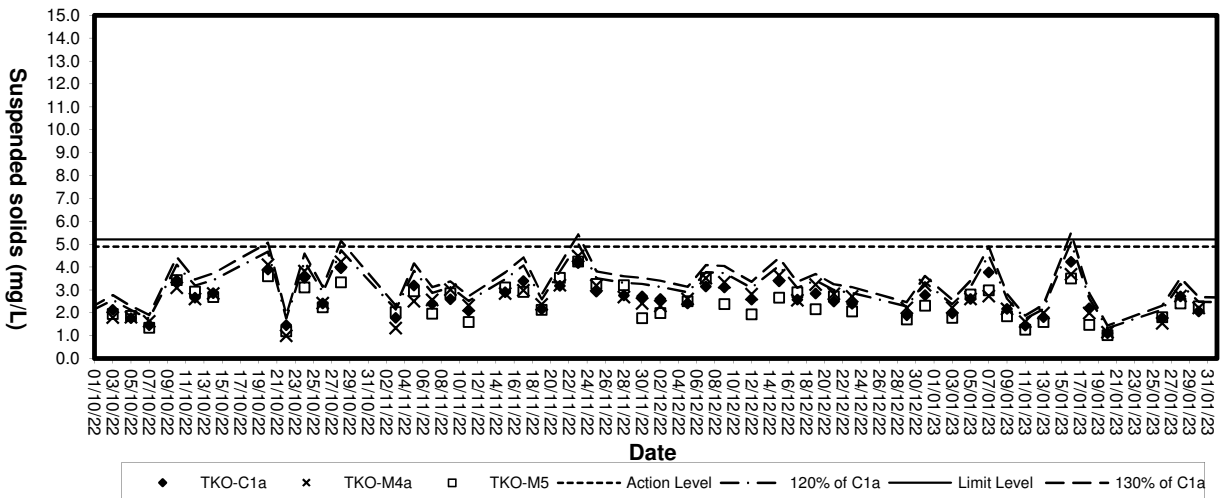

Appendix E

Weather Condition

Daily Extract of Meteorological Observations , January 2023 - Tseung Kwan O

Day	Mean Pressure (hPa)	Air Temperature			Mean Dew Point (deg. C)	Mean Relative Humidity (%)	Total Rainfall (mm)	Prevailing Wind Direction (degrees)	Mean Wind Speed (km/h)
		Absolute Daily Max (deg. C)	Mean (deg.C)	Absolute Daily Min (deg. C)					
1	1023.3	19.3	16.9	14.5	10.2	65	0.1	10	23.4
2	1023.1	21.6	18.7	17.2	12	65	Trace	20	21.8
3	1023.7	19.2	17.3	16.1	11.4	69	Trace	10	24.1
4	1023.4	19.9	17.4	15.8	12.7	74	Trace	60	26.8
5	1023.4	21.4	18.5	16.8	14.3	77	-	60	21.7
6	1022.6	23.4	19.8	17	11.9	62	-	10	18.4
7	1020.5	21.3	19.1	17.9	10.9	59	-	60	23.8
8	1020	20	18.6	17	9.8	57	Trace	70	35
9	1019.5	21.4	19.7	18.2	14.3	72	0.1	50	22.8
10	1018.8	19	18.2	17.6	16.8	91	5.5	40	23.4
11	1017.6	19.1	18.1	17	15.9	87	3.2	60	31
12	1014.5	19.6	18.8	17.5	16.8	88	0.5	50	26.9
13	1011	23.9	21.7	18.9	20.5	93	4.5	20	14.5
14	1009.4	24.7	22.7	20	20.9	90	3.4	250	9.4
15	1014.4	21.6	18.4	13	14.7	80	Trace	10	25.9
16	1021.6	13.2	12.3	11.3	6.2	66	-	360	30.6
17	1023.6	15.2	13.2	11	8	71	-	10	24.2
18	1024.1	17.1	14.3	11.5	6.2	58	-	10	22.5
19	1022.3	18.7	16.1	13.3	8.9	63	-	40	14.4
20	1021.4	20.9	17.6	15.9	10.1	62	Trace	20	20.6
21	1019.5	18.8	16.9	16	13.1	79	Trace	80	36.9
22	1016.5	22.4	18.8	16.6	15.8	83	0.6	40	15.5
23	1016.2	21.1	18.8	16.9	16.4	86	-	50	11.3
24	1024.5	18.7	14.7	12	4.3	51	0.3	10	48.6
25	1023.1	14.4	12.5	10.6	3.5	54	-	60	31.8
26	1019.3	18.6	15.7	13	9.4	66	-	60	26.8
27	1022.5	17.3	15.4	12.4	3.2	46	-	10	40.8
28	1024.1	15.7	12.9	10.6	-5.2	28	-	10	32.6
29	1023.7	16	12.8	9.8	-2.6	35	-	360	18.6
30	1022.2	18.8	15	11.7	3.5	48	-	60	18.3
31	1017.9	20.1	16.9	13.8	9.1	61	-	60	27.3

Rainfall measured in increment of 0.5 mm. Amount of < 0.5 mm cannot be detected

Appendix F

Event-Action Plans

EVENT/ACTION PLAN FOR AIR QUALITY EXCEEDANCE

ET Leader	ACTION	Contractor
	IC(E)	ER

	ACTION LEVEL		
1. Exceedance for one sample	<ol style="list-style-type: none"> 1. Identify source, investigate the causes of exceedance and propose remedial measures 2. Inform ER, IC(E) and Contractor 3. Repeat measurement to confirm finding 4. Increase monitoring frequency to daily 	<ol style="list-style-type: none"> 1. Check monitoring data submitted by the ET 2. Check contractor's working method 	<ol style="list-style-type: none"> 1. Notify Contractor
2. Exceedance for two or more consecutive samples	<ol style="list-style-type: none"> 1. Identify source, investigate the causes of exceedance and propose remedial measures 2. Inform IC(E) and Contractor 3. Repeat measurements to confirm finding 4. Increase monitoring frequency to daily 5. Discuss with IC(E) and Contractor on remedial actions 6. If exceedance continues, arrange meeting with IC(E) and ER. 7. If exceedance stops, cease additional monitoring 	<ol style="list-style-type: none"> 1. Check monitoring data submitted by the ET 2. Check the Contractor's working method 3. Discuss with ET and Contractor on possible remedial measures 4. Advise the ER on the effectiveness of the proposed remedial measures 5. Supervise implementation of remedial measures 	<ol style="list-style-type: none"> 1. Confirm receipt of notification of failure in writing 2. Notify the Contractor 3. Ensure remedial measures properly implemented
	LIMIT LEVEL		
1. Exceedance for one sample	<ol style="list-style-type: none"> 1. Identify source, investigate the causes of exceedance and propose remedial measures 2. Inform ER, Contractor and EPD 3. Repeat measurement to confirm finding 4. Increase monitoring frequency to daily 5. Assess the effectiveness of Contractor's remedial actions and keep IC(E), EPD and ER informed of the results 	<ol style="list-style-type: none"> 1. Check monitoring data submitted by the ET 2. Check Contractor's working method 3. Discuss with ET and Contractor on possible remedial measures 4. Advise the ER on the effectiveness of the proposed remedial measures 5. Supervise implementation of remedial measures 	<ol style="list-style-type: none"> 1. Confirm receipt of notification of failure in writing 2. Notify the Contractor 3. Ensure remedial measures properly implemented
			<ol style="list-style-type: none"> 1. Take immediate action to avoid further exceedance 2. Submit proposals for remedial actions to IC(E) within 3 working days of notification 3. Implement the agreed proposals 4. Amend proposal if appropriate.

EVENT/ACTION PLAN FOR AIR QUALITY EXCEEDANCE

EVENT	ACTION			Contractor
	ET Leader	IC(E)	ER	
2. Exceedance for two or more consecutive samples	<ol style="list-style-type: none"> 1. Identify source, investigate the causes of exceedance and propose remedial measures 2. Notify IC(E), ER, EPD and Contractor 3. Repeat measurement to confirm finding 4. Increase monitoring frequency to daily 5. Carry out analysis of contractor's working procedures to determine possible mitigation to be implemented 6. Arrange meeting with IC(E) and ER to discuss the remedial actions to be taken 7. Assess effectiveness of Contractor's remedial actions and keep IC(E), EPD and ER informed of the results 8. If exceedance stops, cease additional monitoring 	<ol style="list-style-type: none"> 1. Discuss amongst ER, ET and Contractor on the potential remedial actions 2. Review Contractor's remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly 3. Supervise the implementation of remedial measures 	<ol style="list-style-type: none"> 1. Confirm receipt of notification of failure in writing 2. Notify Contractor 3. In consultation with the IC(E), agree with the Contractor on the remedial measures to be implemented 4. Ensure remedial measures are properly implemented 5. If exceedances continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated 	<ol style="list-style-type: none"> 1. Take immediate action to avoid further exceedances 2. Submit proposals for remedial actions to IC(E) within 3 working days of notification 3. Implement the agreed proposals 4. Resubmit proposals if problem still not under control 5. Stop the relevant activity of works as determined by the ER until the exceedance is abated

EVENT/ACTION PLAN FOR NOISE EXCEEDANCE

EVENT	ACTION			
	ET Leader	IC(E)	ER	Contractor
Action Level	<ol style="list-style-type: none"> 1. Notify the IC(E) and the Contractor. 2. Carry out investigation. 3. Report the results of investigation to the IC(E) and the Contractor. 4. Discuss with the Contractor and formulate remedial measures. 5. Increase monitoring frequency to check mitigation effectiveness 	<ol style="list-style-type: none"> 1. Review the analysed results submitted by the ET. 2. Review the proposed remedial measures by the Contractor and advise the ER accordingly. 3. Supervise the implementation of remedial measures. 	<ol style="list-style-type: none"> 1. Confirm receipt of notification of failure in writing. 2. Notify the Contractor. 3. Require the Contractor to propose remedial measures for the analysed noise problem. 4. Ensure remedial measures are properly implemented. 	<ol style="list-style-type: none"> 1. Submit noise mitigation proposals to IC(E). 2. Implement noise mitigation proposals.
Limit Level	<ol style="list-style-type: none"> 1. Notify the IC(E), the ER, the EPD and the Contractor. 2. Identify source. 3. Repeat measurement to confirm findings. 4. Increase monitoring frequency. 5. Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented. 6. Inform the IC(E), the ER and the EPD the causes & actions taken for the exceedances. 7. Assess effectiveness of Contractor's remedial actions and keep the IC(E), the EPD and the ER informed of the results 8. If exceedance due to the construction works stops, cease additional monitoring 	<ol style="list-style-type: none"> 1. Discuss amongst the ER, the ET Leader and the Contractor on the potential remedial actions. 2. Review the Contractor's remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly. 3. Supervise the implementation of remedial measures. 	<ol style="list-style-type: none"> 1. Confirm receipt of notification of failure in writing. 2. Notify the Contractor. 3. Require the Contractor to propose remedial measures for the analysed noise problem. 4. Ensure remedial measures are properly implemented. 5. If exceedances continue, consider what activity of the work is responsible and instruct the Contractor to stop that activity of work until the exceedances is abated. 	<ol style="list-style-type: none"> 1. Take immediate action to avoid further exceedance 2. Submit proposals for remedial actions to IC(E) within 3 working days of notification. 3. Implement the agreed proposals. 4. Resubmit proposals if problem still not under control. 5. Stop the relevant activity of works as determined by the ER until the exceedances is abated.

EVENT AND ACTION PLAN FOR WATER QUALITY EXCEEDANCE

Event	ACTION			
	ET Leader	Contractor	ER	IEC
<p>Action level being exceeded by one sampling day</p>	<ol style="list-style-type: none"> 1. Identify source(s) of impact; 2. Repeat in-situ measurement to confirm findings; 3. Notify Contractor in writing within 24 hours of identification of the exceedance 4. Check monitoring data, all plant, equipment and Contractor's working methods; 5. Carry out investigation 6. Report the results of investigation to the Contractor within 3 working days of identification of exceedance and advise contractor if exceedance is due to contractor's construction works 7. Discuss mitigation measures with Contractor if exceedance is due to the construction works within 4 working days 8. Repeat measurement on next day of exceedance if exceedance is due to the construction works 	<ol style="list-style-type: none"> 1. Notify the ER and IEC in writing within 24 hours of identification of exceedance 2. Rectify unacceptable practice; 3. Check all plant and equipment; 4. Submit investigation report to IEC and ER within 3 working days of the identification of an exceedance 5. Consider changes of working method if exceedance is due to the construction works 6. Discuss with ET, IEC and ER and propose mitigation measures to IEC and ER if exceedance is due to the construction works within 4 working days of identification of an exceedance 7. Implement the agreed mitigation measures within reasonable time scale 	<ol style="list-style-type: none"> 1. Notify EPD and other relevant governmental agencies in writing within 24 hours of the identification of the exceedance 2. Discuss with IEC, ET and Contractor on the proposed mitigation measures; 3. Require contractor to propose remedial measures for the analysed problem if related to the construction works 4. Ensure remedial measures are properly implemented 5. Assess the effectiveness of the mitigation measure 	<ol style="list-style-type: none"> 1. Check monitoring data submitted by ET 2. Confirm ET assessment if exceedance is due / not due to the works 3. Discuss with ET, ER and Contractor on the mitigation measures 4. Review contractor's mitigation measures whenever necessary to ensure their effectiveness and advise the ER accordingly 5. Supervise the implementation of mitigation measures

EVENT AND ACTION PLAN FOR WATER QUALITY

Event	ACTION			IEC
	ET Leader	Contractor	ER	
<p>Action level being exceeded by more than one consecutive sampling days</p>	<ol style="list-style-type: none"> 1. Identify source(s) of impact; 2. Repeat in-situ measurement to confirm findings 3. Notify Contractor in writing within 24 hours of identification 4. Check monitoring data, all plant, equipment and Contractor's working methods; 5. Carry out investigation 6. Report the results of investigation to the Contractor within 3 working days of identification of exceedance and advise contractor if exceedance is due to contractor's construction works 7. Discuss mitigation measures with IEC and Contractor within 4 working of identification of an exceedance 8. Ensure mitigation measures are implemented; 9. Prepare to increase the monitoring frequency to daily; 10. Repeat measurement on next day of exceedance. 	<ol style="list-style-type: none"> 1. Notify IEC and ER in writing within 24 hours of identification of exceedance 2. Rectify unacceptable practice; 3. Check all plant and equipment; 4. Consider changes of working methods; 5. Submit the results of the investigation to IEC and ER within 3 working days of the identification of an exceedance 6. Discuss with ET, IEC and ER and propose mitigation measures to IEC and ER within 4 working days of identification of an exceedance 7. Implement the agreed mitigation measures within reasonable time scale 	<ol style="list-style-type: none"> 1. Notify EPD and other relevant governmental agencies in writing within 24 hours of the identification of the exceedance 2. Discuss with IEC, ET and Contractor on the proposed mitigation measures; 3. Require contractor to propose remedial measures for the analysed problem if related to the construction works 4. Ensure remedial measures are properly implemented 5. Assess the effectiveness of the mitigation measure 	<ol style="list-style-type: none"> 1. Check monitoring data submitted by ET 2. Confirm ET assessment if exceedance is due / not due to the works 3. Discuss with ET, ER and Contractor on the mitigation measures. 4. Review contractor's mitigation measures whenever necessary to ensure their effectiveness and advise the ER accordingly 5. Assess the effectiveness of the implemented mitigation measures.

EVENT AND ACTION PLAN FOR WATER QUALITY EXCEEDANCE

Event	ACTION		
	ET Leader	Contractor	ER
Limit level being exceeded by one sampling day	<ol style="list-style-type: none"> 1. Repeat in-situ measurement to confirm findings; 2. Identify source(s) of impact; 3. Notify Contractor in writing within 24 hours of identification of the exceedance 4. Check monitoring data, all plant, equipment and Contractor's working methods; 5. Carry out investigation 6. Report the results of investigation to the Contractor within 3 working days of identification of exceedance and advise contractor if exceedance is due to contractor's construction works 7. Discuss mitigation measures with IEC, ER and Contractor within 4 working of identification of an exceedance 8. Ensure mitigation measures are implemented; 9. Increase the monitoring frequency to daily until no exceedance of Limit Level. 	<ol style="list-style-type: none"> 1. Notify IEC and ER in writing; within 24 hours of the identification of the exceedance 2. Rectify unacceptable practice; 3. Check all plant and equipment; 4. Consider changes of working methods; 5. Submit the results of the investigation to IEC and ER within 3 working days of the identification of an exceedance 6. Discuss with ET, IEC and ER and propose mitigation measures to IEC and ER within 4 working days of the identification of an exceedance 7. Implement the agreed mitigation measures within reasonable time scale 	<ol style="list-style-type: none"> 1. Notify EPD and other relevant governmental agencies in writing within 24 hours of identification of exceedance 2. Discuss with IEC, ET and Contractor on the proposed mitigation measures; 3. Request Contractor to critically review the working methods; 4. Ensure remedial measures are properly implemented 5. Assess the effectiveness of the implemented mitigation measures.
			<ol style="list-style-type: none"> 1. Check monitoring data submitted by ET 2. Confirm ET assessment if exceedance is due / not due to the works 3. Discuss with ET, ER and Contractor on the mitigation measures. 4. Review proposals on mitigation measures submitted by Contractor and advise the ER accordingly. 5. Assess the effectiveness of the implemented mitigation measures

EVENT AND ACTION PLAN FOR WATER QUALITY EXCEEDANCE

Event	ACTION			
	ET Leader	Contractor	ER	IEC
Limit Level being exceeded by more than one consecutive sampling days	<ol style="list-style-type: none"> 1. Repeat in-situ measurement to confirm findings; 2. Identify source(s) of impact; 3. Notify Contractor in writing within 24 hours of identification of the exceedance 4. Check monitoring data, all plant, equipment and Contractor's working methods; 5. Carry out investigation 6. Report the results of investigation to the Contractor within 3 working days of identification of exceedance and advise contractor if exceedance is due to contractor's construction works 7. Discuss mitigation measures with IEC, ER and Contractor; 8. Ensure mitigation measures are implemented; 9. Increase the monitoring frequency to daily until no exceedance of Limit Level for two consecutive days. 	<ol style="list-style-type: none"> 1. Notify ER and IEC in writing within 24 hours of the identification of the exceedance and Rectify unacceptable practice; 2. Check all plant and equipment; 4. Consider changes of working methods; 8. Submit the results of the investigation to IEC and ER within 3 working days of the identification of an exceedance 5. Discuss with ET, IEC and ER and propose mitigation measures to IEC and ER within 4 working days; 6. Implement the agreed mitigation measures within reasonable time scale 7. As directed by the Engineer, to slow down or to stop all or part of the marine work or construction activities. 	<ol style="list-style-type: none"> 1. Notify EPD and other relevant governmental agencies in writing within 24 hours of identification of exceedance 2. Discuss with IEC, ET and Contractor on the proposed mitigation measures; 3. Request Contractor to critically review the working methods; 6. Ensure remedial measures are properly implemented 4. Assess the effectiveness of the implemented mitigation measures; 5. Consider and instruct, if necessary, the Contractor to slow down or to stop all or part of the marine work until no exceedance of Limit Level. 	<ol style="list-style-type: none"> 1. Check monitoring data submitted by ET 2. Confirm ET assessment if exceedance is due / not due to the works 3. Discuss with ER, ET and Contractor on the mitigation measures. 4. Review proposals on mitigation measures submitted by Contractor and advise the ER accordingly. 5. Assess the effectiveness of the implemented mitigation measures.

Appendix G

Works Programme

ID	Task Name	Baseline Start	Baseline Finish	Start	Finish	Duration	Predecessor	Time risk allowa	Total Slack	Actual Start	Actual Finish	% Complet	Gantt Chart (2022-2023)																	
													22	19	26	2	9	16	23	30	6	13	20	27	6	13	20	27	3	10
1	Contract duration of Contract CV/2021/9	Sat 1/1/22	Sun 31/12/23	Sat 1/1/22	Sun 31/12/23	730 days			0 days	NA	NA	0%	[Gantt bar from 1/1/22 to 31/3/23]																	
2	Contract date , Date of the Letter of Acceptance (assumed)	Mon 20/12/21	Mon 20/12/21	Mon 20/12/21	Mon 20/12/21	0 days			742 days	NA	NA	0%	[Gantt bar from 20/12/21 to 20/12/21]																	
3	Starting Date of the Works	Sat 1/1/22	Sat 1/1/22	Sat 1/1/22	Sat 1/1/22	0 days			729 days	NA	NA	0%	[Gantt bar from 1/1/22 to 1/1/22]																	
4	Starting Date of Section 1 of the Works	Sat 1/1/22	Sat 1/1/22	Sat 1/1/22	Sat 1/1/22	0 days			0 days	NA	NA	0%	[Gantt bar from 1/1/22 to 1/1/22]																	
5	Starting Date of Section 2 of the Works	Sat 1/1/22	Sat 1/1/22	Sat 1/1/22	Sat 1/1/22	0 days			0 days	NA	NA	0%	[Gantt bar from 1/1/22 to 1/1/22]																	
6	Starting Date of Section 3 of the Works	Sat 1/1/22	Sat 1/1/22	Sat 1/1/22	Sat 1/1/22	0 days			0 days	NA	NA	0%	[Gantt bar from 1/1/22 to 1/1/22]																	
7	Date for Completion of the Works	Sun 31/12/23	Sun 31/12/23	Sun 31/12/23	Sun 31/12/23	0 days			1 day	NA	NA	0%	[Gantt bar from 31/12/23 to 31/12/23]																	
8	Completion Date of Section 1 of the Works	Sun 31/12/23	Sun 31/12/23	Sun 31/12/23	Sun 31/12/23	0 days			0 days	NA	NA	0%	[Gantt bar from 31/12/23 to 31/12/23]																	
9	Completion Date of Section 2 of the Works	Sun 31/12/23	Sun 31/12/23	Sun 31/12/23	Sun 31/12/23	0 days			0 days	NA	NA	0%	[Gantt bar from 31/12/23 to 31/12/23]																	
10	Completion Date of Section 3 of the Works	Sun 31/12/23	Sun 31/12/23	Sun 31/12/23	Sun 31/12/23	0 days			0 days	NA	NA	0%	[Gantt bar from 31/12/23 to 31/12/23]																	
11	Planned completion dates	Sun 31/12/23	Sun 31/12/23	Sun 31/12/23	Sun 31/12/23	0 days			0 days	NA	NA	0%	[Gantt bar from 31/12/23 to 31/12/23]																	
12	Planned completion date of Section 1	Sun 31/12/23	Sun 31/12/23	Sun 31/12/23	Sun 31/12/23	0 days			0 days	NA	NA	0%	[Gantt bar from 31/12/23 to 31/12/23]																	
13	Planned completion date of Section 2	Sun 31/12/23	Sun 31/12/23	Sun 31/12/23	Sun 31/12/23	0 days			0 days	NA	NA	0%	[Gantt bar from 31/12/23 to 31/12/23]																	
14	Planned completion date of Section 3	Sun 31/12/23	Sun 31/12/23	Sun 31/12/23	Sun 31/12/23	0 days			0 days	NA	NA	0%	[Gantt bar from 31/12/23 to 31/12/23]																	
15	Access Date of the Site	Sat 1/1/22	Sat 1/1/22	Sat 1/1/22	Sat 1/1/22	0 days			729 days	NA	NA	0%	[Gantt bar from 1/1/22 to 1/1/22]																	
16	Portion A2, A3a, A3b, A3c, A4, A5a, A5b, A7c2, A10 and A11 (within 60 days after starting date)	Sat 1/1/22	Sat 1/1/22	Sat 1/1/22	Sat 1/1/22	0 days			0 days	Sat 1/1/22	Sat 1/1/22	100%	[Gantt bar from 1/1/22 to 1/1/22]																	
17	Portion B1, B3, B6a, B6b and B7 (within 60 days after starting date)	Sat 1/1/22	Sat 1/1/22	Sat 1/1/22	Sat 1/1/22	0 days			0 days	Sat 1/1/22	Sat 1/1/22	100%	[Gantt bar from 1/1/22 to 1/1/22]																	
18	Portion A1, A7a, A7b, A7c1, A9, A9a and B6c (7 day's advance notice after starting date)	Sat 1/1/22	Sat 1/1/22	Sat 1/1/22	Sat 1/1/22	0 days			0 days	Sat 1/1/22	Sat 1/1/22	100%	[Gantt bar from 1/1/22 to 1/1/22]																	
19	Portion B6c (7 day's advance notice after starting date)	Sat 1/1/22	Sat 1/1/22	Sat 1/1/22	Sat 1/1/22	0 days			0 days	Sat 1/1/22	Sat 1/1/22	100%	[Gantt bar from 1/1/22 to 1/1/22]																	
20	Hand back of the Site	Sun 31/12/23	Sun 31/12/23	Sun 31/12/23	Sun 31/12/23	0 days			0 days	NA	NA	0%	[Gantt bar from 31/12/23 to 31/12/23]																	
21	Portion A2, A3a, A3b, A3c, A4, A5a, A7c2, A10 and A11 (or at an earlier date notified by the Project Manager with 30 days' advance notice)	Sun 31/12/23	Sun 31/12/23	Sun 31/12/23	Sun 31/12/23	0 days			0 days	NA	NA	0%	[Gantt bar from 31/12/23 to 31/12/23]																	
22	Portion A1, A7b, A7c1, A9 and A9a (or at an earlier date as notified by the Project Manager with 30 days' advance notice)	Sun 31/12/23	Sun 31/12/23	Sun 31/12/23	Sun 31/12/23	0 days			0 days	NA	NA	0%	[Gantt bar from 31/12/23 to 31/12/23]																	
23	Portion B1, B3, B6a, B6b and B7 (or at an earlier date as notified by the Project Manager with 30 days' advance notice)	Sun 31/12/23	Sun 31/12/23	Sun 31/12/23	Sun 31/12/23	0 days			0 days	NA	NA	0%	[Gantt bar from 31/12/23 to 31/12/23]																	
24	Portion B6c (or at an earlier date as notified by the Project Manager with 30 days' advance notice)	Sun 31/12/23	Sun 31/12/23	Sun 31/12/23	Sun 31/12/23	0 days			0 days	NA	NA	0%	[Gantt bar from 31/12/23 to 31/12/23]																	
25	Section 1 of the Works - Tseung Kwan O Area 137 Fill Bank	Sat 1/1/22	Sun 31/12/23	Sat 1/1/22	Sun 31/12/23	730 days	4SS		0 days	Sat 1/1/22	NA	47%	[Gantt bar from 1/1/22 to 31/12/23]																	
26	Taking over the existing facilities at the Tseung Kwan O Area 137 Fill Bank within Portion A of the Site	Sat 1/1/22	Sat 1/1/22	Sat 1/1/22	Sat 1/1/22	1 day	4SS	0	0 days	Sat 1/1/22	Sat 1/1/22	100%	[Gantt bar from 1/1/22 to 1/1/22]																	
27	Operation of the the Tseung Kwan O Area 137 Fill Bank within Portion A of the Site	Sat 1/1/22	Sun 31/12/23	Sat 1/1/22	Sun 31/12/23	730 days	26SS	0	0 days	Sat 1/1/22	NA	49%	[Gantt bar from 1/1/22 to 31/12/23]																	
28	Operation and maintenance of the surveillance system within Portion A of the Site	Sat 1/1/22	Sun 31/12/23	Sat 1/1/22	Sun 31/12/23	730 days	26SS	0	0 days	Sat 1/1/22	NA	49%	[Gantt bar from 1/1/22 to 31/12/23]																	
29	Operation and maintenance of the existing tipping halls at the Tseung Kwan O Area 137 Fill Bank within Portion A of the Site	Sat 1/1/22	Sun 31/12/23	Sat 1/1/22	Sun 31/12/23	730 days	26SS	0	0 days	Sat 1/1/22	NA	49%	[Gantt bar from 1/1/22 to 31/12/23]																	
30	Provision, operation and maintenance of the Crushing Plant at the Tseung Kwan O Area 137 Fill Bank within Portion A of the Site	Sat 1/1/22	Sun 31/12/23	Sat 1/1/22	Sun 31/12/23	730 days	26SS	0	0 days	Sat 1/1/22	NA	49%	[Gantt bar from 1/1/22 to 31/12/23]																	
31	Operation and maintenance of the dewatering plant at the Tseung Kwan O Area 137 Fill Bank within portion A of the Site.	Sat 1/1/22	Sun 31/12/23	Sat 1/1/22	Sun 31/12/23	730 days	26SS	0	0 days	Sat 1/1/22	NA	49%	[Gantt bar from 1/1/22 to 31/12/23]																	
32	Collection and delivery of Public Fill by barges from the Chai Wan and Mui Wo Barging Points to the TKO Area 137 Fill Bank within Portion A of the Site	Sat 1/1/22	Sun 31/12/23	Sat 1/1/22	Sun 31/12/23	730 days	26SS	0	0 days	Sat 1/1/22	NA	49%	[Gantt bar from 1/1/22 to 31/12/23]																	

Project: 3 month rolling programme Jan23-mar 23 CV/2021/09
Date: [30/12/2022]

Task		External Tasks		Duration-only		External Tasks	
Split		External Milestone		Manual Summary Rollup		External Milestone	
Milestone		Inactive Milestone		Manual Summary		Progress	
Summary		Inactive Summary		Start-only		Deadline	
Project Summary		Manual Task		Finish-only		Slack	

ID	Task Name	Baseline Start	Baseline Finish	Start	Finish	Duration	Predecessor	Time Allowance	Total Slack	Actual Start	Actual Finish	% Complete	Gantt Chart (Jan '23 to Apr '23)											
33	Construction of Gabion wall	NA	NA	Sat 19/2/22	Sun 31/12/23	681 days			0 days	Sat 19/2/22	NA	14%	[Gantt bar from 19/2/22 to 31/12/23]											
34	Preparing and submitting a method statement for approval	Sat 19/2/22	Fri 4/3/22	Sat 19/2/22	Wed 2/3/22	12 days		2	0 days	Sat 19/2/22	Wed 2/3/22	100%	[Gantt bar from 19/2/22 to 2/3/22]											
35	Preparing and submitting the material submission	Sat 5/3/22	Fri 18/3/22	Sat 19/2/22	Wed 2/3/22	12 days		2	0 days	Sat 19/2/22	Wed 2/3/22	100%	[Gantt bar from 19/2/22 to 2/3/22]											
36	Obtaining approval from the Project Manager	Sat 19/3/22	Fri 1/4/22	Tue 26/4/22	Tue 26/4/22	1 day	35,34	2	0 days	Tue 26/4/22	Tue 26/4/22	100%	[Gantt bar from 26/4/22 to 26/4/22]											
37	Construction of Gabion wall	Sat 2/4/22	Sun 31/12/23	Mon 4/7/22	Sun 31/12/23	546 days		7	0 days	Mon 4/7/22	NA	10%	[Gantt bar from 4/7/22 to 31/12/23]											
38	Re-surfacing of the access road at A11 TKOFB	NA	NA	Mon 21/3/22	Fri 22/4/22	33 days			0 days	Mon 21/3/22	Fri 22/4/22	100%	[Gantt bar from 21/3/22 to 22/4/22]											
39	Submission of method statement of re-surfacing the access road	NA	NA	Mon 21/3/22	Fri 25/3/22	5 days		0	0 days	Mon 21/3/22	Fri 25/3/22	100%	[Gantt bar from 21/3/22 to 25/3/22]											
40	Obtaining approval from the Project Manager	NA	NA	Thu 7/4/22	Thu 7/4/22	1 day	39	2	0 days	Thu 7/4/22	Thu 7/4/22	100%	[Gantt bar from 7/4/22 to 7/4/22]											
41	Milling off the existing pavement, overlaying new pavement on the access road	NA	NA	Fri 15/4/22	Fri 22/4/22	8 days	40	1	0 days	Fri 15/4/22	Fri 22/4/22	100%	[Gantt bar from 15/4/22 to 22/4/22]											
42	PMI no.3 Trial Production of blanket layer material recycled from public fill	Tue 28/6/22	Wed 24/8/22	Tue 28/6/22	Wed 30/11/22	156 days			0 days	Tue 28/6/22	Wed 30/11/22	100%	[Gantt bar from 28/6/22 to 30/11/22]											
43	Submission of method statement	Tue 28/6/22	Fri 29/7/22	Tue 28/6/22	Fri 29/7/22	32 days		1	0 days	Tue 28/6/22	Fri 29/7/22	100%	[Gantt bar from 28/6/22 to 29/7/22]											
44	Obtaining approval from the Project Manager	Sat 30/7/22	Sat 20/8/22	Wed 17/8/22	Wed 17/8/22	1 day		2	0 days	Wed 17/8/22	Wed 17/8/22	100%	[Gantt bar from 17/8/22 to 17/8/22]											
45	Manufacturing and delivery of screening machine	Fri 22/7/22	Thu 11/8/22	Fri 22/7/22	Thu 11/8/22	21 days		2	0 days	Fri 22/7/22	Thu 11/8/22	100%	[Gantt bar from 22/7/22 to 11/8/22]											
46	Trial Production of blanket layer material	Mon 22/8/22	Wed 24/8/22	Mon 17/10/22	Wed 30/11/22	45 days		1	0 days	Mon 17/10/22	Wed 30/11/22	100%	[Gantt bar from 17/10/22 to 30/11/22]											
47	PMI no.24 Implementation of C easy system at TKOFB	Mon 22/8/22	Tue 27/12/22	Tue 30/8/22	Mon 23/1/23	147 days			8 days	Tue 30/8/22	NA	70%	[Gantt bar from 30/8/22 to 23/1/23]											
48	Submission of method statement for approval	Mon 22/8/22	Sun 28/8/22	Tue 30/8/22	Tue 30/8/22	1 day			0 days	Tue 30/8/22	Tue 30/8/22	100%	[Gantt bar from 30/8/22 to 30/8/22]											
49	Obtaining approval from the Project Manager	Mon 29/8/22	Sun 18/9/22	Wed 31/8/22	Wed 31/8/22	1 day	48	2	0 days	Wed 31/8/22	Wed 31/8/22	100%	[Gantt bar from 31/8/22 to 31/8/22]											
50	Ordering and delivery of C easy system hardware to site	Mon 19/9/22	Wed 2/11/22	Thu 1/9/22	Thu 8/9/22	8 days	49	3	0 days	Thu 1/9/22	Thu 8/9/22	100%	[Gantt bar from 1/9/22 to 8/9/22]											
51	Installation of the C Easy system	Thu 3/11/22	Wed 16/11/22	Fri 9/9/22	Tue 27/9/22	19 days	50	2	0 days	Fri 9/9/22	Tue 27/9/22	100%	[Gantt bar from 9/9/22 to 27/9/22]											
52	Trail run of the system	Thu 17/11/22	Wed 30/11/22	Tue 22/11/22	Wed 30/11/22	9 days	51	2	0 days	Tue 22/11/22	Wed 30/11/22	100%	[Gantt bar from 22/11/22 to 30/11/22]											
53	Parallel run with the old system	Thu 1/12/22	Mon 26/12/22	Thu 1/12/22	Sun 22/1/23	53 days	52	2	8 days	Thu 1/12/22	NA	50%	[Gantt bar from 1/12/22 to 22/1/23]											
54	Operation with C easy system individually	Tue 27/12/22	Tue 27/12/22	Mon 23/1/23	Mon 23/1/23	1 day	53	0	8 days	NA	NA	0%	[Gantt bar from 23/1/23 to 23/1/23]											
55	Handing over the facilities at the Tseung Kwan O Area 137 Fill Bank within Portion A of the Site to the Employer	Sun 31/12/23	Sun 31/12/23	Sun 31/12/23	Sun 31/12/23	0 days	8SS	0	0 days	NA	NA	0%	[Gantt bar from 31/12/23 to 31/12/23]											
56	Planned Completion Date (Section 1)	Sun 31/12/23	Sun 31/12/23	Sun 31/12/23	Sun 31/12/23	0 days			1 day	NA	NA	0%	[Gantt bar from 31/12/23 to 31/12/23]											
57	Section 2 of the Works - Tuen Mun Area 38 Fill Bank	Sat 1/1/22	Sun 31/12/23	Sat 1/1/22	Sun 31/12/23	730 days			0 days	Sat 1/1/22	NA	51%	[Gantt bar from 1/1/22 to 31/12/23]											
58	Taking over the existing facilities at the Tuen Mun Area 38 Fill Bank within Portion B of the Site	Sat 1/1/22	Sat 1/1/22	Sat 1/1/22	Sat 1/1/22	1 day	5SS	0	0 days	Sat 1/1/22	Sat 1/1/22	100%	[Gantt bar from 1/1/22 to 1/1/22]											
59	Operation of the Tuen Mun Area 38 Fill Bank within Portion B of the Site	Sat 1/1/22	Sun 31/12/23	Sat 1/1/22	Sun 31/12/23	730 days	5SS	0	0 days	Sat 1/1/22	NA	49%	[Gantt bar from 1/1/22 to 31/12/23]											
60	Operation and maintenance of the surveillance system within Portion B of the Site	Sat 1/1/22	Sun 31/12/23	Sat 1/1/22	Sun 31/12/23	730 days	5SS	0	0 days	Sat 1/1/22	NA	49%	[Gantt bar from 1/1/22 to 31/12/23]											
61	Operation and maintenance of the existing tipping halls at the Tuen Mun Area 38 Fill Bank within Portion B of the Site	Sat 1/1/22	Sun 31/12/23	Sat 1/1/22	Sun 31/12/23	730 days	5SS	0	0 days	Sat 1/1/22	NA	49%	[Gantt bar from 1/1/22 to 31/12/23]											
62	Operation and Maintenance of the Crushing Plant at the Tuen Mun Area 38 Fill Bank within Portion B of the Site	Sat 1/1/22	Sun 31/12/23	Sat 1/1/22	Sun 31/12/23	730 days	5SS	0	0 days	Sat 1/1/22	NA	49%	[Gantt bar from 1/1/22 to 31/12/23]											
63	Operation and maintenance of glass cullet storage compartment at the Tuen Mun Area 38 Fill Bank within Portion B of the Site	Sat 1/1/22	Sun 31/12/23	Sat 1/1/22	Sun 31/12/23	730 days	5SS	0	0 days	Sat 1/1/22	NA	49%	[Gantt bar from 1/1/22 to 31/12/23]											
64	PMI no.05 Construction of vehicle washing house facilities	Wed 6/4/22	Fri 2/9/22	Wed 6/4/22	Sun 2/10/22	180 days			0 days	Wed 6/4/22	Sun 2/10/22	100%	[Gantt bar from 6/4/22 to 2/10/22]											
65	Submission of method statement of vehicle washing house facilities	Wed 6/4/22	Wed 6/4/22	Wed 6/4/22	Wed 6/4/22	1 day		1	0 days	Wed 6/4/22	Wed 6/4/22	100%	[Gantt bar from 6/4/22 to 6/4/22]											

Project: 3 month rolling programme Jan23-mar 23 CV/2021/09
Date: [30/12/2022]

Task		External Tasks		Duration-only		External Tasks	
Split		External Milestone		Manual Summary Rollup		External Milestone	
Milestone		Inactive Milestone		Manual Summary		Progress	
Summary		Inactive Summary		Start-only		Deadline	
Project Summary		Manual Task		Finish-only		Slack	

ID	Task Name	Baseline Start	Baseline Finish	Start	Finish	Duration	Predecessor	Time Allowance	Total Slack	Actual Start	Actual Finish	% Complete	Gantt Chart (2022-2023)																
													19	26	2	9	16	23	30	6	13	20	27	6	13	20	27	3	10
66	Obtaining approval from the Project Manager	Mon 25/4/22	Mon 25/4/22	Mon 25/4/22	Mon 25/4/22	1 day	65	2	0 days	Mon 25/4/22	Mon 25/4/22	100%	[Gantt bar from 25/4/22 to 25/4/22]																
67	Fabrication and delivery of the vehicle washing house facilities materials on site	Fri 10/6/22	Mon 8/8/22	Fri 10/6/22	Thu 18/8/22	70 days		5	0 days	Fri 10/6/22	Thu 18/8/22	100%	[Gantt bar from 10/6/22 to 18/8/22]																
68	Installation of the vehicle washing house facilities	Tue 9/8/22	Thu 1/9/22	Tue 13/9/22	Thu 29/9/22	17 days	67	2	0 days	Tue 13/9/22	Thu 29/9/22	100%	[Gantt bar from 13/9/22 to 29/9/22]																
69	Trial run of vehicle washing house facilities	Fri 2/9/22	Fri 2/9/22	Sun 2/10/22	Sun 2/10/22	1 day	68	0	0 days	Sun 2/10/22	Sun 2/10/22	100%	[Gantt bar from 2/10/22 to 2/10/22]																
70	PMI no.20 Implementation of C easy system at TMFB	Mon 22/8/22	Tue 27/12/22	Wed 31/8/22	Mon 23/1/23	146 days			8 days	Wed 31/8/22	NA	68%	[Gantt bar from 31/8/22 to 23/1/23]																
71	Submission of method statement for approval	Mon 22/8/22	Sun 28/8/22	Wed 31/8/22	Wed 31/8/22	1 day		1	0 days	Wed 31/8/22	Wed 31/8/22	100%	[Gantt bar from 31/8/22 to 31/8/22]																
72	Obtaining approval from the Project Manager	Mon 29/8/22	Sun 18/9/22	Thu 1/9/22	Thu 1/9/22	1 day	71	2	0 days	Thu 1/9/22	Thu 1/9/22	100%	[Gantt bar from 1/9/22 to 1/9/22]																
73	Ordering and delivery of C easy system hardware to site	Mon 19/9/22	Wed 2/11/22	Sat 17/9/22	Wed 21/9/22	5 days	72	3	0 days	Sat 17/9/22	Wed 21/9/22	100%	[Gantt bar from 17/9/22 to 21/9/22]																
74	Installation of the C Easy system	Thu 3/11/22	Wed 16/11/22	Thu 22/9/22	Sun 9/10/22	18 days	73	2	0 days	Thu 22/9/22	Sun 9/10/22	100%	[Gantt bar from 22/9/22 to 9/10/22]																
75	Trail run of the system	Thu 17/11/22	Wed 30/11/22	Thu 24/11/22	Thu 1/12/22	8 days	74	2	0 days	Thu 24/11/22	Thu 1/12/22	100%	[Gantt bar from 24/11/22 to 1/12/22]																
76	Parallel run with the old system	Thu 1/12/22	Mon 26/12/22	Thu 1/12/22	Sun 22/1/23	53 days	75	2	8 days	Thu 1/12/22	NA	50%	[Gantt bar from 1/12/22 to 22/1/23]																
77	Operation with C easy system individually	Tue 27/12/22	Tue 27/12/22	Mon 23/1/23	Mon 23/1/23	1 day	76	0	8 days	NA	NA	0%	[Gantt bar from 23/1/23 to 23/1/23]																
78	Handing over the facilities at the Tuen Mun Area 38 Fill Bank within Portion B of the Site to the Employer	Sun 31/12/23	Sun 31/12/23	Sun 31/12/23	Sun 31/12/23	1 day	9SS	0	0 days	NA	NA	0%	[Gantt bar from 31/12/23 to 31/12/23]																
79	Planned Completion Date (Section 2)	Sun 31/12/23	Sun 31/12/23	Sun 31/12/23	Sun 31/12/23	0 days			0 days	NA	NA	0%	[Gantt bar from 31/12/23 to 31/12/23]																
80	Section 3 of the Works - Designated Reclamation Sites in the Mainland	Mon 20/12/21	Sun 31/12/23	Tue 7/12/21	Sun 31/12/23	755 days			0 days	Tue 7/12/21	NA	6%	[Gantt bar from 7/12/21 to 31/12/23]																
81	Collection and delivery of 2 million tonnes of Public Fill by vessels from Tseung Kwan O Area 137 Fill Bank and the Tuen Mun Area 38 Fill Bank to the Designated Reclamation Sites in the Mainland	Mon 20/12/21	Sun 31/12/23	Tue 7/12/21	Wed 20/12/23	744 days			11 days	Tue 7/12/21	NA	10%	[Gantt bar from 7/12/21 to 20/12/23]																
82	1st and 2nd quarter of first year	Mon 20/12/21	Thu 31/3/22	Tue 7/12/21	Tue 14/6/22	190 days			0 days	Tue 7/12/21	Tue 14/6/22	100%	[Gantt bar from 7/12/21 to 14/6/22]																
83	Installing Front End Mobile Unit (FEMU) onto the proposed vessels	Mon 20/12/21	Sun 26/12/21	Fri 20/5/22	Fri 20/5/22	1 day		2	0 days	Fri 20/5/22	Fri 20/5/22	100%	[Gantt bar from 20/5/22 to 20/5/22]																
84	Submitting application documents to EPD for application of dumping permits	Mon 20/12/21	Mon 20/12/21	Tue 28/12/21	Tue 28/12/21	1 day		0	0 days	Tue 28/12/21	Tue 28/12/21	100%	[Gantt bar from 28/12/21 to 28/12/21]																
85	Obtaining the dumping permit from EPD	Tue 21/12/21	Fri 31/12/21	Wed 25/5/22	Wed 25/5/22	1 day	84	2	0 days	Wed 25/5/22	Wed 25/5/22	100%	[Gantt bar from 25/5/22 to 25/5/22]																
86	Submitting Application documents to the Employer for the application of the dumping permit of waste at the sea	Mon 20/12/21	Mon 20/12/21	Tue 7/12/21	Tue 7/12/21	1 day			0 days	Tue 7/12/21	Tue 7/12/21	100%	[Gantt bar from 7/12/21 to 7/12/21]																
87	Obtaining the dumping permits from Ministry of Ecology and environment of the People's Republic of China through the Employer	Tue 21/12/21	Fri 31/12/21	Tue 26/4/22	Tue 26/4/22	1 day		14	0 days	Tue 26/4/22	Tue 26/4/22	100%	[Gantt bar from 26/4/22 to 26/4/22]																
88	Obtaining all necessary permits, licenses, approvals and consents	Mon 20/12/21	Fri 31/12/21	Wed 25/5/22	Wed 25/5/22	1 day		14	0 days	Wed 25/5/22	Wed 25/5/22	100%	[Gantt bar from 25/5/22 to 25/5/22]																
89	Collection and delivery of 166666 tonnes of Public Fill	Sat 1/1/22	Thu 31/3/22	Wed 25/5/22	Tue 14/6/22	21 days		10	0 days	Wed 25/5/22	Tue 14/6/22	100%	[Gantt bar from 25/5/22 to 14/6/22]																
90	3rd quarter of first year	Fri 20/5/22	Fri 30/9/22	Tue 28/12/21	Mon 13/6/22	168 days			0 days	Tue 28/12/21	Mon 13/6/22	100%	[Gantt bar from 28/12/21 to 13/6/22]																
91	Submitting application documents to EPD for application of dumping permits	Fri 17/6/22	Fri 17/6/22	Tue 28/12/21	Tue 28/12/21	1 day		0	0 days	Tue 28/12/21	Tue 28/12/21	100%	[Gantt bar from 28/12/21 to 28/12/21]																
92	Obtaining the dumping permit from EPD	Sat 18/6/22	Thu 30/6/22	Wed 25/5/22	Wed 25/5/22	1 day	91	14	0 days	Wed 25/5/22	Wed 25/5/22	100%	[Gantt bar from 25/5/22 to 25/5/22]																
93	Submitting Application documents to the Employer for the application of the dumping permit of waste at the sea	Fri 20/5/22	Fri 20/5/22	Fri 8/4/22	Fri 8/4/22	1 day		0	0 days	Fri 8/4/22	Fri 8/4/22	100%	[Gantt bar from 8/4/22 to 8/4/22]																
94	Obtaining the dumping permits from Ministry of Ecology and environment of the People's Republic of China through the Employer	Sat 21/5/22	Thu 30/6/22	Tue 26/4/22	Tue 26/4/22	1 day	93	14	0 days	Tue 26/4/22	Tue 26/4/22	100%	[Gantt bar from 26/4/22 to 26/4/22]																
95	Obtaining all necessary permits, licenses, approvals and consents	Fri 17/6/22	Thu 30/6/22	Wed 25/5/22	Wed 25/5/22	1 day		0	0 days	Wed 25/5/22	Wed 25/5/22	100%	[Gantt bar from 25/5/22 to 25/5/22]																
96	Collection and delivery of 499998 tonnes of Public Fill	Fri 1/7/22	Fri 30/9/22	Mon 13/6/22	Mon 13/6/22	1 day	95,92,94	14	0 days	Mon 13/6/22	Mon 13/6/22	100%	[Gantt bar from 13/6/22 to 13/6/22]																
97	4th quarter of first year	Sat 20/8/22	Sat 31/12/22	Fri 22/7/22	Fri 30/9/22	71 days			0 days	Fri 22/7/22	Fri 30/9/22	100%	[Gantt bar from 22/7/22 to 30/9/22]																

Project: 3 month rolling programme Jan23-mar 23 CV/2021/09
Date: [30/12/2022]

Task		External Tasks		Duration-only		External Tasks	
Split		External Milestone		Manual Summary Rollup		External Milestone	
Milestone		Inactive Milestone		Manual Summary		Progress	
Summary		Inactive Summary		Start-only		Deadline	
Project Summary		Manual Task		Finish-only		Slack	

ID	Task Name	Baseline Start	Baseline Finish	Start	Finish	Duration	Predecessor	Time risk allowa	Total Slack	Actual Start	Actual Finish	% Complet	Gantt Chart (Timeline: Dec '22 to Apr '23)											
98	Submitting application documents to EPD for application of dumping permits	Sat 17/9/22	Sat 17/9/22	Fri 22/7/22	Thu 4/8/22	14 days		0	0 days	Fri 22/7/22	Thu 4/8/22	100%	[Task bar: 17/9/22 to 4/8/22, 100% complete]											
99	Obtaining the dumping permit from EPD (assumed on 30/9/22)	Sun 18/9/22	Fri 30/9/22	Thu 1/9/22	Mon 5/9/22	5 days	98	2	0 days	Thu 1/9/22	Mon 5/9/22	100%	[Task bar: 1/9/22 to 5/9/22, 100% complete]											
100	Submitting Application documents to the Employer for the application of the dumping permit of waste at the sea	Sat 20/8/22	Sat 20/8/22	Wed 10/8/22	Wed 10/8/22	1 day		0	0 days	Wed 10/8/22	Wed 10/8/22	100%	[Task bar: 10/8/22 to 10/8/22, 100% complete]											
101	Obtaining the dumping permits from Ministry of Ecology and environment of the People's Republic of China through the Employer (assumed on 30/9/22)	Sun 21/8/22	Fri 30/9/22	Mon 5/9/22	Mon 5/9/22	1 day	100	14	0 days	Mon 5/9/22	Mon 5/9/22	100%	[Task bar: 5/9/22 to 5/9/22, 100% complete]											
102	Obtaining all necessary permits, licenses, approvals and consents	Sat 17/9/22	Fri 30/9/22	Mon 5/9/22	Fri 30/9/22	1 day		2	0 days	Mon 5/9/22	Fri 30/9/22	100%	[Task bar: 5/9/22 to 30/9/22, 100% complete]											
103	Collection and delivery of 333332 tonnes of Public Fil	Sat 1/10/22	Sat 31/12/22	Mon 5/9/22	Mon 19/9/22	15 days	96,102,1	14	0 days	Mon 5/9/22	Mon 19/9/22	100%	[Task bar: 5/9/22 to 19/9/22, 100% complete]											
104	1st quarter of second year	Sun 20/11/22	Fri 31/3/23	Sun 20/11/22	Fri 31/3/23	132 days			12 days	NA	NA	0%	[Summary bar: 20/11/22 to 31/3/23, 0% complete]											
105	Submitting application documents to EPD for application of dumping permits	Sun 18/12/22	Sun 18/12/22	Sun 18/12/22	Sun 18/12/22	1 day		0	12 days	NA	NA	0%	[Task bar: 18/12/22 to 18/12/22, 0% complete]											
106	Obtaining the dumping permit from EPD (assumed on 31/12/22)	Mon 19/12/22	Sat 31/12/22	Mon 19/12/22	Sat 31/12/22	13 days	105	2	12 days	NA	NA	0%	[Task bar: 19/12/22 to 31/12/22, 0% complete]											
107	Submitting Application documents to the Employer for the application of the dumping permit of waste at the sea	Sun 20/11/22	Sun 20/11/22	Sun 20/11/22	Sun 20/11/22	1 day		0	12 days	NA	NA	0%	[Task bar: 20/11/22 to 20/11/22, 0% complete]											
108	Obtaining the dumping permits from Ministry of Ecology and environment of the People's Republic of China through the Employer	Mon 21/11/22	Sat 31/12/22	Mon 21/11/22	Sat 31/12/22	41 days	107	14	12 days	NA	NA	0%	[Task bar: 21/11/22 to 31/12/22, 0% complete]											
109	Obtaining all necessary permits, licenses, approvals and consents	Sun 18/12/22	Sat 31/12/22	Sun 18/12/22	Sat 31/12/22	14 days		2	12 days	NA	NA	0%	[Task bar: 18/12/22 to 31/12/22, 0% complete]											
110	Collection and delivery of 250000 tonnes of Public F	Sun 1/1/23	Fri 31/3/23	Sun 1/1/23	Fri 31/3/23	90 days	103,109,	14	12 days	NA	NA	0%	[Task bar: 1/1/23 to 31/3/23, 0% complete]											
111	2nd quarter of second year	Sat 18/2/23	Fri 30/6/23	Sat 18/2/23	Fri 30/6/23	133 days			12 days	NA	NA	0%	[Summary bar: 18/2/23 to 30/6/23, 0% complete]											
112	Submitting application documents to EPD for application of dumping permits	Sat 18/3/23	Sat 18/3/23	Sat 18/3/23	Sat 18/3/23	1 day		0	12 days	NA	NA	0%	[Task bar: 18/3/23 to 18/3/23, 0% complete]											
113	Obtaining the dumping permit from EPD (assumed on 31/3/23)	Sun 19/3/23	Fri 31/3/23	Sun 19/3/23	Fri 31/3/23	13 days	112	2	12 days	NA	NA	0%	[Task bar: 19/3/23 to 31/3/23, 0% complete]											
114	Submitting Application documents to the Employer for the application of the dumping permit of waste at the sea	Sat 18/2/23	Sat 18/2/23	Sat 18/2/23	Sat 18/2/23	1 day		0	12 days	NA	NA	0%	[Task bar: 18/2/23 to 18/2/23, 0% complete]											
115	Obtaining the dumping permits from Ministry of Ecology and environment of the People's Republic of China through the Employer (assumed on 30/9/22)	Sun 19/2/23	Fri 31/3/23	Sun 19/2/23	Fri 31/3/23	41 days	114	14	12 days	NA	NA	0%	[Task bar: 19/2/23 to 31/3/23, 0% complete]											
116	Obtaining all necessary permits, licenses, approvals and consents	Sat 18/3/23	Fri 31/3/23	Sat 18/3/23	Fri 31/3/23	14 days		2	12 days	NA	NA	0%	[Task bar: 18/3/23 to 31/3/23, 0% complete]											
117	Collection and delivery of 250000 tonnes of Public F	Sat 1/4/23	Fri 30/6/23	Sat 1/4/23	Fri 30/6/23	91 days	110,113,	14	12 days	NA	NA	0%	[Task bar: 1/4/23 to 30/6/23, 0% complete]											
118	3rd quarter of second year	Sat 20/5/23	Sat 30/9/23	Sat 20/5/23	Sat 30/9/23	134 days			12 days	NA	NA	0%	[Summary bar: 20/5/23 to 30/9/23, 0% complete]											
119	Submitting application documents to EPD for application of dumping permits	Sat 17/6/23	Sat 17/6/23	Sat 17/6/23	Sat 17/6/23	1 day		0	12 days	NA	NA	0%	[Task bar: 17/6/23 to 17/6/23, 0% complete]											
120	Obtaining the dumping permit from EPD (assumed on 30/6/23)	Sun 18/6/23	Fri 30/6/23	Sun 18/6/23	Fri 30/6/23	13 days	119	14	12 days	NA	NA	0%	[Task bar: 18/6/23 to 30/6/23, 0% complete]											
121	Submitting Application documents to the Employer for the application of the dumping permit of waste at the sea	Sat 20/5/23	Sat 20/5/23	Sat 20/5/23	Sat 20/5/23	1 day		0	12 days	NA	NA	0%	[Task bar: 20/5/23 to 20/5/23, 0% complete]											
122	Obtaining the dumping permits from Ministry of Ecology and environment of the People's Republic of China through the Employer (assumed on 30/9/22)	Sun 21/5/23	Fri 30/6/23	Sun 21/5/23	Fri 30/6/23	41 days	121	14	12 days	NA	NA	0%	[Task bar: 21/5/23 to 30/6/23, 0% complete]											
123	Obtaining all necessary permits, licenses, approvals and consents	Sat 17/6/23	Fri 30/6/23	Sat 17/6/23	Fri 30/6/23	14 days		2	12 days	NA	NA	0%	[Task bar: 17/6/23 to 30/6/23, 0% complete]											
124	Collection and delivery of 250000 tonnes of Public F	Sat 1/7/23	Sat 30/9/23	Sat 1/7/23	Sat 30/9/23	92 days	117,123,	14	12 days	NA	NA	0%	[Task bar: 1/7/23 to 30/9/23, 0% complete]											
125	4th quarter of second year	Sun 20/8/23	Sun 31/12/23	Sun 20/8/23	Wed 20/12/23	123 days			11 days	NA	NA	0%	[Summary bar: 20/8/23 to 20/12/23, 0% complete]											
126	Submitting application documents to EPD for application of dumping permits	Sun 17/9/23	Sun 17/9/23	Sun 17/9/23	Sun 17/9/23	1 day		0	12 days	NA	NA	0%	[Task bar: 17/9/23 to 17/9/23, 0% complete]											
127	Obtaining the dumping permit from EPD (assumed on 30/9/23)	Mon 18/9/23	Sat 30/9/23	Mon 18/9/23	Sat 30/9/23	13 days	126	2	12 days	NA	NA	0%	[Task bar: 18/9/23 to 30/9/23, 0% complete]											

Project: 3 month rolling programme Jan23-mar 23 CV/2021/09
Date: [30/12/2022]

Task		External Tasks		Duration-only		External Tasks	
Split		External Milestone		Manual Summary Rollup		External Milestone	
Milestone		Inactive Milestone		Manual Summary		Progress	
Summary		Inactive Summary		Start-only		Deadline	
Project Summary		Manual Task		Finish-only		Slack	

ID	Task Name	Baseline Start	Baseline Finish	Start	Finish	Duration	Predecessor	time allowa	Total Slack	Actual Start	Actual Finish	% Complet	2022 Jan '23 Feb '23 Mar '23 Apr																
													19	26	2	9	16	23	30	6	13	20	27	6	13	20	27	3	10
128	Submitting Application documents to the Employer for the application of the dumping permit of waste at the sea	Sun 20/8/23	Sun 20/8/23	Sun 20/8/23	Sun 20/8/23	1 day		0	12 days	NA	NA	0%																	
129	Obtaining the dumping permits from Ministry of Ecology and environment of the People's Republic of China through the Employer(assumed on 30/9/23)	Mon 21/8/23	Sat 30/9/23	Mon 21/8/23	Sat 30/9/23	41 days	128	14	12 days	NA	NA	0%																	
130	Obtaining all necessary permits, licenses, approvals and consents	Sun 17/9/23	Sat 30/9/23	Sun 17/9/23	Sat 30/9/23	14 days		0	12 days	NA	NA	0%																	
131	Collection and delivery of 250000 tonnes of Public F	Sun 1/10/23	Sun 31/12/23	Mon 2/10/23	Wed 20/12/23	80 days	124,130, 14	14	11 days	NA	NA	0%																	
132	Removal, excavation and deposition of stockpiled and/or deposited Public Fill within the Designated Reclamation Sites in the Mainland	Sat 1/1/22	Sun 31/12/23	Sat 1/1/22	Sun 31/12/23	730 days	6SS		0 days	NA	NA	0%																	
133	Removal, excavation and deposition of stockpiled and/or deposited public fill	Sat 1/1/22	Sun 31/12/23	Sat 1/1/22	Sun 31/12/23	730 days		14	0 days	NA	NA	0%																	
134	Operation and maintenance of the existing navigation channel and turning basins in association with the existing berthing facility at Zone E of the Designated Reclamation Sites in the Mainland	Sat 1/1/22	Sun 31/12/23	Sat 1/1/22	Sun 31/12/23	730 days	6SS		0 days	Sat 1/1/22	NA	20%																	
135	Operation and maintenance of the existing navigation channel and turning basins	Sat 1/1/22	Sun 31/12/23	Sat 1/1/22	Sun 31/12/23	730 days		14	0 days	Sat 1/1/22	NA	20%																	
136	Design, construction, operation and maintenance of the new navigation channel and turning basins in association with the new berthing facility at Zone B of the Designated Reclamation Sites in the Mainland (subject to Project's Manager's instruction)	Sat 12/12/09	Sat 12/12/09	Thu 16/6/22	Sun 31/12/23	564 days			0 days	NA	NA	0%																	
137	Obtaining the dumping permits from Ministry of Ecology and environment of the People's Republic of China through the Employer for Zone A & B (assumed on 31/12/21)	Fri 31/12/21	Mon 31/1/22	Thu 16/6/22	Thu 16/6/22	1 day		0	2 days	NA	NA	0%																	
138	Preparation of design submission	Sat 1/1/22	Sun 30/1/22	Fri 17/6/22	Sat 16/7/22	30 days	137	7	2 days	NA	NA	0%																	
139	Obtaining all necessary design approvals and consents	Mon 31/1/22	Tue 1/3/22	Sun 17/7/22	Mon 15/8/22	30 days	138	7	2 days	NA	NA	0%																	
140	Construction of the new navigation channel and turning basins	Wed 2/3/22	Fri 29/7/22	Tue 16/8/22	Thu 12/1/23	150 days	139	14	2 days	NA	NA	0%																	
141	Obtaining the construction completion certificate	Sat 30/7/22	Sun 28/8/22	Fri 13/1/23	Sat 11/2/23	30 days	140	7	2 days	NA	NA	0%																	
142	Operation and maintenance of navigation channel and turning basins	Mon 29/8/22	Sun 31/12/23	Tue 14/2/23	Sun 31/12/23	321 days	141	14	0 days	NA	NA	0%																	
143	Design, construction, operation and maintenance of new berthing facilities at Zone B of the Designated Reclamation Sites in the Mainland (subject to Project's Manager's instruction)	Fri 31/12/21	Sun 31/12/23	Thu 16/6/22	Sun 31/12/23	564 days			0 days	NA	NA	0%																	
144	Obtaining the dumping permits from Ministry of Ecology and environment of the People's Republic of China through the Employer for Zone A & B (assumed on 31/12/21)	Fri 31/12/21	Fri 31/12/21	Thu 16/6/22	Thu 16/6/22	1 day			0 days	NA	NA	0%																	
145	Preparation of design submission	Sat 1/1/22	Sun 30/1/22	Fri 17/6/22	Sat 16/7/22	30 days	144	7	0 days	NA	NA	0%																	
146	Obtaining all necessary design approvals and consents	Mon 31/1/22	Tue 1/3/22	Sun 17/7/22	Mon 15/8/22	30 days	145	7	0 days	NA	NA	0%																	
147	Construction of the berthing facilities	Wed 2/3/22	Sun 28/8/22	Tue 16/8/22	Sat 11/2/23	180 days	146	14	0 days	NA	NA	0%																	
148	Obtaining the construction completion certificate	Mon 29/8/22	Tue 27/9/22	Sun 12/2/23	Mon 13/3/23	30 days	147	7	0 days	NA	NA	0%																	
149	Operation and maintenance of new berthing facilities	Wed 28/9/22	Sun 31/12/23	Tue 14/3/23	Sun 31/12/23	293 days	148	14	0 days	NA	NA	0%																	
150	Design and construction of seawalls (approximate 200m) in association with new berthing facility at Zone B of the Designated Reclamation Sites in the Mainland	Fri 10/6/22	Sat 4/2/23	Sun 1/1/23	Fri 30/6/23	181 days			184 days	NA	NA	0%																	
151	Obtaining the dumping permits from Ministry of Ecology and environment of the People's Republic of China through the Employer for Zone A & B	Sat 1/1/22	Sat 1/1/22	Sun 1/1/23	Sun 1/1/23	1 day		0	184 days	NA	NA	0%																	
152	Preparation of design submission (PMI no18)	Sun 2/1/22	Mon 31/1/22	Mon 2/1/23	Tue 31/1/23	30 days	151	7	184 days	NA	NA	0%																	

Project: 3 month rolling programme Jan23-mar 23 CV/2021/09
Date: [30/12/2022]

Task		External Tasks		Duration-only		External Tasks	
Split		External Milestone		Manual Summary Rollup		External Milestone	
Milestone		Inactive Milestone		Manual Summary		Progress	
Summary		Inactive Summary		Start-only		Deadline	
Project Summary		Manual Task		Finish-only		Slack	

ID	Task Name	Baseline Start	Baseline Finish	Start	Finish	Duration	Predecessor	Time risk allowance	Total Slack	Actual Start	Actual Finish	% Complete	Gantt Chart (Jan '23 to Apr)											
153	Obtaining all necessary design approvals and consents	Tue 1/2/22	Wed 2/3/22	Wed 1/2/23	Thu 2/3/23	30 days	152	7	184 days	NA	NA	0%	[Gantt bar from 1/2/23 to 2/3/23]											
154	Construction of seawalls (subject to Project's Manager's instruction)	Thu 3/3/22	Tue 31/5/22	Fri 3/3/23	Wed 31/5/23	90 days	153	14	184 days	NA	NA	0%	[Gantt bar from 3/3/23 to 5/23/23]											
155	Obtaining the construction completion certificate (subject to Project's Manager's instruction)	Wed 1/6/22	Thu 30/6/22	Thu 1/6/23	Fri 30/6/23	30 days	154	7	184 days	NA	NA	0%	[Gantt bar from 1/6/23 to 6/23/23]											
156	Planned Completion Date (Section 3)	Sun 31/12/23	Sun 31/12/23	Sun 31/12/23	Sun 31/12/23	0 days			1 day	NA	NA	0%	[Milestone at 31/12/23]											

Project: 3 month rolling programme Jan23-mar 23 CV/2021/09
Date: [30/12/2022]




Task		External Tasks		Duration-only		External Tasks	
Split		External Milestone		Manual Summary Rollup		External Milestone	
Milestone		Inactive Milestone		Manual Summary		Progress	
Summary		Inactive Summary		Start-only		Deadline	
Project Summary		Manual Task		Finish-only		Slack	

Appendix H

Weekly ET's Site Inspection Record

Handling of Surplus Public Fill (2022-2023) - Tseung Kwan O Area 137 Fill Bank

Inspection Date : 4 - 1 - 2023
 Time : 14:30
 Weather : Sunny / Fine / Cloudy / Overcast / Drizzle / Rain / Storm / Hazy
 Wind : Calm / Light / Breeze / Strong
 Temperature : 18
 Humidity : High / Moderate / Low

Inspected by	CEDD	Contractor / Sub-Contractor	ET
Signature:			
Name:	Tseung Yan Wai	Kwok Wing Lam	Chan Hon Lam
Title	AOA / PS	EO	Technician

Handling of Surplus Public Fill (2022-2023) - Tseung Kwan O Area 137 Fill Bank

Environmental Checklist	Implementation Stages*			Remark
	Yes	No	N/A	
Fugitive Dust Emission				
▪ Dust control / mitigation measures shall be provided to prevent dust nuisance.	√			
▪ A buffer zone of at least 100m shall be maintained between the edge of the stockpiling area and the nearest ASRs at the TKO Industrial Estate. Within the buffer zone, no dusty material shall be stockpiled and no loading / unloading and similar activities should be allowed.	√			
▪ Water sprays shall be provided and used to dampen materials.	√			
▪ Regular cleaning and watering the site shall be provided to minimize the fugitive dust emissions.	√			
▪ All vehicles shall be restrict to a maximum speed of 10 km per hour.	√			
▪ Any vehicle with open load carrying area used for moving materials which has the potential to create dust shall have properly fitting side and tail boards. Material having the potential to create dust shall not be loaded to a level higher than the side and tail boards, and shall be covered by a clean tarpaulin.	√			
▪ The designated site main haul road shall be paved or regular watering.	√			
▪ Frequent watering of work site shall be at least three times per day.	√			
▪ Wheel washing facilities including high-pressure water jet shall be provided at the entrance of work site.	√			
▪ Every vehicle shall be washed to remove any dusty materials from its body and wheels before leaving the fill bank.	√			
▪ All plant and equipment should be well maintained e.g. without black smoke emission.	√			
▪ Open burning should be prohibited.	√			
▪ The temporary slope surfaces, especially those facing to the north of the site shall be covered with impermeable sheet or sprayed with water or protected by other method approved by CEDD.	√			
▪ Final slope surfaces, especially those facing to the north of the site shall be treated by compaction, followed by hydroseeding, vegetation planting or sealing with shot concrete, latex, vinyl, bitumen, or other suitable surface stabilizer approved by CEDD.	√			
▪ When fill material is transfer by belt conveyor systems, the conveyors shall be enclosed on top and 2 sides.	√			
▪ The belt scraper shall be equipped with bottom plates or other similar means to prevent falling of material from the return belt.	√			
▪ The level of stockpiling belt conveyor shall be adjustable such that the vertical distance between the belt conveyor and the material landing point is maintained at no more than 1m.	√			
▪ Approval or exemption Non-road Mobile Machinery (NRMM) labels should be painted or securely fixed on regulated machines and non-road vehicles at a conspicuous position according to the Air Pollution Control (Non-road Mobile Machinery) (Emission) Regulation (APCO Cap.311).	√			
Noise Impact				
▪ The approved method of working, equipment and sound-reducing measures (e.g. use of silenced type of equipment, etc.) shall be adapted.	√			
▪ Only well maintained plant should be operated on-site and plant should be serviced regularly during the construction works.	√			
▪ Powered mechanical equipment (PME) should be covered or shielded by appropriate acoustic materials.	√			
▪ Air compressors and hand held breakers should have noise labels.	√			
▪ Machines and plants that may be in intermittent use should be shut down between work periods or should be throttled down to a minimum.	√			
▪ Noisy equipment and mobile plant shall always be site away from NSRs.	√			

Handling of Surplus Public Fill (2022-2023) - Tseung Kwan O Area 137 Fill Bank

Environmental Checklist	Implementation Stages*			Remark
	Yes	No	N/A	
Water Quality				
▪ Drainage system should be adequate and well maintained to prevent flooding and overflow, especially after rain storms.	√			
▪ The permanent drainage channels should have sediment basin, traps and baffles and maintain properly.	√			
▪ Temporary intercepting drains should be used at the stockpiling area to divert polluted stormwater to the intercepting channels. Earth bunds and sand bay barriers shall be used to assist the diversion of polluted stormwater to the intercepting channels.	√			
▪ Manholes should be covered and sealed.	√			
▪ Unnecessary water retained in receptacles and standing water should be avoided to prevent mosquito breeding.	√			
▪ A buffer distance of at least 100m shall be maintained between the boundary of the public fill stockpiling area and the sea front.	√			
▪ A buffer distance of at least 20m shall be maintained between the boundary of the C&DMSF and the seafront.	√			
▪ The stormwater intercepting system shall be effective to collect of runoff and remove suspended solids before discharge.	√			
▪ The temporary slope surfaces, especially those facing to the north of the site shall be covered with impermeable sheet or sprayed with water or protected by other method approved by CEDD.	√			
▪ Final slope surfaces, especially those facing to the north of the site shall be treated by compaction, followed by hydroseeding, vegetation planting or sealing with shotconcrete, latex, vinyl, bitumen, or other suitable surface stabilizer approved by CEDD.	√			
▪ Existing and newly constructed Catchpits, sand and silt removal facilities and intercepting channels shall be maintained, and the deposited silt and grit shall be removed weekly and on a need basis especially at the onset of and after each rainstorm to ensure that these facilities are functioning properly at all times.	√			
▪ A wheel washing bay shall be provided at the site exit and wash-water shall have sand and silt settled out or removed before being discharged into storm drains.	√			
▪ The section of construction road between wheel washing bay and the public road shall be paved with concrete, bituminous materials or hardcores to reduce vehicle tracking of soil and to prevent site run-off from entering public road drains.	√			
▪ Sewage from toilets shall be discharged in to a foul sewer, or chemical toilets shall be provided. The chemical toilets (if use) shall be provided by a licensed contractor, who will be responsible for disposal and maintenance of these facilities.	√			
▪ Oil intercept in addition of sand / silt removal facilities shall be provided at the car parking areas.	√			
▪ Oil interceptor shall be provided at work shop.	√			
▪ Tipping halls enclosed with top and 3-side to prevent spillage of material into marine water.	√			
▪ The barges shall be in right size such that adequate clearance is maintained between the vessels and the seabed at all states of the tide to ensure the undue turbidity is not generated by turbulence from vessel movement or propeller wash.	√			
▪ All vessels used for transportation of fill material shall have tight fitting seals to their bottom openings to prevent leakage of material during transport.	√			
▪ Adequate environmental control measures shall be provided to prevent / avoid dropping of fill material into the sea during the transfer.	√			
▪ Barges shall not be filled to a level which may cause the overflow of material during loading or transportation. Barge effluents shall be properly collected and treated before disposal.	√			
▪ The work activities shall not cause any visible foam, oil, grease, scum, litter or other objectionable matters to be present on the water in the vicinity of the barging facilities.	√			
▪ Existing silt curtain at the outward side of the basin near the Barging Handling Area (BHA) throughout the period shall be repair, maintain and service when there is public fill intake by barges to the Fill Bank in accordance with PS Clause 1.68. The total length of the silt curtains shall not be less than 160m, and a gap of about 80m shall be left open for access of barges. The silt curtain shall be properly maintained such that it can also serve the function of refuse containment boom to confine floating refuse.	√			
▪ A waste collection vessel shall be deployed to remove floating debris.	√			

Handling of Surplus Public Fill (2022-2023) - **Tseung Kwan O Area 137 Fill Bank**


Environmental Checklist	Implementation Stages*			Remark
	Yes	No	N/A	
Landscape and Visual				
<ul style="list-style-type: none"> ▪ The design of the fill bank and platform heights adopted should allow the fill bank to fit into the general topography of the surrounding land. Straight edged slopes should be avoided. 	√			
<ul style="list-style-type: none"> ▪ The maximum stockpiling height at the fill bank shall be limited to a maximum of +35.2mPD. 	√			
<ul style="list-style-type: none"> ▪ Surface of outer slopes of the fill bank shall preferably be hydroseeded or covered with geo-textile matting of appropriate colour (e.g. dark green / brown) once completed. 	√			
<ul style="list-style-type: none"> ▪ The barging point and the C&DMSF at the fill bank shall not be in operation from 07:00 pm to 08:00 am daily to avoid potential visual impact from glare. 	√			
Other Environmental Factors				
<ul style="list-style-type: none"> • C&D waste sorted from mixed C&D material shall be removed from the temporary buffer storage area on a daily basis and transfer to SENT landfill for disposal. 	√			
<ul style="list-style-type: none"> ▪ Plan and stock construction materials carefully to minimise amount of waste generated and avoid unnecessary generation of waste. 	√			
<ul style="list-style-type: none"> ▪ Any unused materials or those with remaining functional capacity should be recycled and stored properly. 	√			
<ul style="list-style-type: none"> ▪ All generators, fuel and oil storage are within bundle areas. 	√			
<ul style="list-style-type: none"> ▪ Oil leakage from machinery, vehicle and plant is prevented. 	√			
<ul style="list-style-type: none"> ▪ The Environmental Permit should be displaced conspicuously on site. 	√			
<ul style="list-style-type: none"> ▪ Good site practices should be adopted to clean the rubbish and litter on a regular basis so as to prevent the rubbish and litter from dropping into the nearby environment. 	√			
<ul style="list-style-type: none"> ▪ To encourage collection of aluminium cans by individual collectors, separate labelled bins should be provided to segregate this waste from other general refuse generated by the workforce. 	√			

Handling of Surplus Public Fill (2022-2023) - **Tseung Kwan O Area 137 Fill Bank**

Summary of the Weekly Site Inspection:




Item	Details of defective works or observations	Proposed Follow Up Action	Photo Ref.	Further Action Required (Yes/No)	Follow up Date

Remark

	Name	Title	Signature	Date
Checked by	June Lau	ET Representative		04 January 2023

Handling of Surplus Public Fill (2022-2023) - Tseung Kwan O Area 137 Fill Bank

Inspection Date : 11-1-2023
 Time : 14:30
 Weather : Sunny / Fine / Cloudy / Overcast / Drizzle / Rain / Storm / Hazy
 Wind : Calm / Light / Breeze / Strong
 Temperature : 18
 Humidity : High / Moderate / Low

Inspected by	CEDD	Contractor / Sub-Contractor	ET
Signature:			
Name:	M.L. MOK	Kwok Wing Lam	Dicky Chan
Title	Asst W/P	EO	Technician

Environmental Checklist	Implementation Stages*			Remark
	Yes	No	N/A	
Fugitive Dust Emission				
▪ Dust control / mitigation measures shall be provided to prevent dust nuisance.	√			
▪ A buffer zone of at least 100m shall be maintained between the edge of the stockpiling area and the nearest ASRs at the TKO Industrial Estate. Within the buffer zone, no dusty material shall be stockpiled and no loading / unloading and similar activities should be allowed.	√			
▪ Water sprays shall be provided and used to dampen materials.	√			
▪ Regular cleaning and watering the site shall be provided to minimize the fugitive dust emissions.	√			
▪ All vehicles shall be restrict to a maximum speed of 10 km per hour.	√			
▪ Any vehicle with open load carrying area used for moving materials which has the potential to create dust shall have properly fitting side and tail boards. Material having the potential to create dust shall not be loaded to a level higher than the side and tail boards, and shall be covered by a clean tarpaulin.	√			
▪ The designated site main haul road shall be paved or regular watering.	√			
▪ Frequent watering of work site shall be at least three times per day.	√			
▪ Wheel washing facilities including high-pressure water jet shall be provided at the entrance of work site.	√			
▪ Every vehicle shall be washed to remove any dusty materials from its body and wheels before leaving the fill bank.	√			
▪ All plant and equipment should be well maintained e.g. without black smoke emission.	√			
▪ Open burning should be prohibited.	√			
▪ The temporary slope surfaces, especially those facing to the north of the site shall be covered with impermeable sheet or sprayed with water or protected by other method approved by CEDD.	√			
▪ Final slope surfaces, especially those facing to the north of the site shall be treated by compaction, followed by hydroseeding, vegetation planting or sealing with shot concrete, latex, vinyl, bitumen, or other suitable surface stabilizer approved by CEDD.	√			
▪ When fill material is transfer by belt conveyor systems, the conveyors shall be enclosed on top and 2 sides.	√			
▪ The belt scraper shall be equipped with bottom plates or other similar means to prevent falling of material from the return belt.	√			
▪ The level of stockpiling belt conveyor shall be adjustable such that the vertical distance between the belt conveyor and the material landing point is maintained at no more than 1m.	√			
▪ Approval or exemption Non-road Mobile Machinery (NRMM) labels should be painted or securely fixed on regulated machines and non-road vehicles at a conspicuous position according to the Air Pollution Control (Non-road Mobile Machinery) (Emission) Regulation (APCO Cap.311).	√			
Noise Impact				
▪ The approved method of working, equipment and sound-reducing measures (e.g. use of silenced type of equipment, etc.) shall be adapted.	√			
▪ Only well maintained plant should be operated on-site and plant should be serviced regularly during the construction works.	√			
▪ Powered mechanical equipment (PME) should be covered or shielded by appropriate acoustic materials.	√			
▪ Air compressors and hand held breakers should have noise labels.	√			
▪ Machines and plants that may be in intermittent use should be shut down between work periods or should be throttled down to a minimum.	√			
▪ Noisy equipment and mobile plant shall always be site away from NSRs.	√			

Handling of Surplus Public Fill (2022-2023) - Tseung Kwan O Area 137 Fill Bank

Environmental Checklist	Implementation Stages*			Remark
	Yes	No	N/A	
Water Quality				
▪ Drainage system should be adequate and well maintained to prevent flooding and overflow, especially after rain storms.	√			
▪ The permanent drainage channels should have sediment basin, traps and baffles and maintain properly.	√			
▪ Temporary intercepting drains should be used at the stockpiling area to divert polluted stormwater to the intercepting channels. Earth bunds and sand bay barriers shall be used to assist the diversion of polluted stormwater to the intercepting channels.	√			
▪ Manholes should be covered and sealed.	√			
▪ Unnecessary water retained in receptacles and standing water should be avoided to prevent mosquito breeding.	√			
▪ A buffer distance of at least 100m shall be maintained between the boundary of the public fill stockpiling area and the sea front.	√			
▪ A buffer distance of at least 20m shall be maintained between the boundary of the C&DMSF and the seafront.	√			
▪ The stormwater intercepting system shall be effective to collect of runoff and remove suspended solids before discharge.	√			
▪ The temporary slope surfaces, especially those facing to the north of the site shall be covered with impermeable sheet or sprayed with water or protected by other method approved by CEDD.	√			
▪ Final slope surfaces, especially those facing to the north of the site shall be treated by compaction, followed by hydroseeding, vegetation planting or sealing with shotconcrete, latex, vinyl, bitumen, or other suitable surface stabilizer approved by CEDD.	√			
▪ Existing and newly constructed Catchpits, sand and silt removal facilities and intercepting channels shall be maintained, and the deposited silt and grit shall be removed weekly and on a need basis especially at the onset of and after each rainstorm to ensure that these facilities are functioning properly at all times.	√			
▪ A wheel washing bay shall be provided at the site exit and wash-water shall have sand and silt settled out or removed before being discharged into storm drains.	√			
▪ The section of construction road between wheel washing bay and the public road shall be paved with concrete, bituminous materials or hardcores to reduce vehicle tracking of soil and to prevent site run-off from entering public road drains.	√			
▪ Sewage from toilets shall be discharged in to a foul sewer, or chemical toilets shall be provided. The chemical toilets (if use) shall be provided by a licensed contractor, who will be responsible for disposal and maintenance of these facilities.	√			
▪ Oil intercept in addition of sand / silt removal facilities shall be provided at the car parking areas.	√			
▪ Oil interceptor shall be provided at work shop.	√			
▪ Tipping halls enclosed with top and 3-side to prevent spillage of material into marine water.	√			
▪ The barges shall be in right size such that adequate clearance is maintained between the vessels and the seabed at all states of the tide to ensure the undue turbidity is not generated by turbulence from vessel movement or propeller wash.	√			
▪ All vessels used for transportation of fill material shall have tight fitting seals to their bottom openings to prevent leakage of material during transport.	√			
▪ Adequate environmental control measures shall be provided to prevent / avoid dropping of fill material into the sea during the transfer.	√			
▪ Barges shall not be filled to a level which may cause the overflow of material during loading or transportation. Barge effluents shall be properly collected and treated before disposal.	√			
▪ The work activities shall not cause any visible foam, oil, grease, scum, litter or other objectionable matters to be present on the water in the vicinity of the barging facilities.	√			
▪ Existing silt curtain at the outward side of the basin near the Barging Handling Area (BHA) throughout the period shall be repair, maintain and service when there is public fill intake by barges to the Fill Bank in accordance with PS Clause 1.68. The total length of the silt curtains shall not be less than 160m, and a gap of about 80m shall be left open for access of barges. The silt curtain shall be properly maintained such that it can also serve the function of refuse containment boom to confine floating refuse.	√			
▪ A waste collection vessel shall be deployed to remove floating debris.	√			


Handling of Surplus Public Fill (2022-2023) - Tseung Kwan O Area 137 Fill Bank

Environmental Checklist	Implementation Stages*			Remark
	Yes	No	N/A	
Landscape and Visual				
▪ The design of the fill bank and platform heights adopted should allow the fill bank to fit into the general topography of the surrounding land. Straight edged slopes should be avoided.	√			
▪ The maximum stockpiling height at the fill bank shall be limited to a maximum of +35.2mPD.	√			
▪ Surface of outer slopes of the fill bank shall preferably be hydroseeded or covered with geo-textile matting of appropriate colour (e.g. dark green / brown) once completed.	√			
▪ The barging point and the C&DMSF at the fill bank shall not be in operation from 07:00 pm to 08:00 am daily to avoid potential visual impact from glare.	√			
Other Environmental Factors				
▪ C&D waste sorted from mixed C&D material shall be removed from the temporary buffer storage area on a daily basis and transfer to SENT landfill for disposal.	√			
▪ Plan and stock construction materials carefully to minimise amount of waste generated and avoid unnecessary generation of waste.	√			
▪ Any unused materials or those with remaining functional capacity should be recycled and stored properly.	√			
▪ All generators, fuel and oil storage are within bundle areas.	√			
▪ Oil leakage from machinery, vehicle and plant is prevented.	√			
▪ The Environmental Permit should be displaced conspicuously on site.	√			
▪ Good site practices should be adopted to clean the rubbish and litter on a regular basis so as to prevent the rubbish and litter from dropping into the nearby environment.	√			
▪ To encourage collection of aluminium cans by individual collectors, separate labelled bins should be provided to segregate this waste from other general refuse generated by the workforce.	√			

Summary of the Weekly Site Inspection:




Item	Details of defective works or observations	Proposed Follow Up Action	Photo Ref.	Further Action Required (Yes/No)	Follow up Date

Remark

	Name	Title	Signature	Date
Checked by	June Lau	ET Representative		11 January 2023

Handling of Surplus Public Fill (2022-2023) - Tseung Kwan O Area 137 Fill Bank

Inspection Date : 18-1-23
 Time : 14:30
 Weather : Sunny / Fine / Cloudy / Overcast / Drizzle / Rain / Storm / Hazy
 Wind : Calm / Light / Breeze / Strong
 Temperature : 16
 Humidity : High / Moderate / Low

Inspected by	CEDD	Contractor / Sub-Contractor	ET
Signature:			
Name:	YL Wong	An Kanari	chan Hor Lan
Title	Asst.	Asst	Technician

Environmental Checklist	Implementation Stages*			Remark
	Yes	No	N/A	
Fugitive Dust Emission				
▪ Dust control / mitigation measures shall be provided to prevent dust nuisance.	√			
▪ A buffer zone of at least 100m shall be maintained between the edge of the stockpiling area and the nearest ASRs at the TKO Industrial Estate. Within the buffer zone, no dusty material shall be stockpiled and no loading / unloading and similar activities should be allowed.	√			
▪ Water sprays shall be provided and used to dampen materials.	√			
▪ Regular cleaning and watering the site shall be provided to minimize the fugitive dust emissions.	√			
▪ All vehicles shall be restrict to a maximum speed of 10 km per hour.	√			
▪ Any vehicle with open load carrying area used for moving materials which has the potential to create dust shall have properly fitting side and tail boards. Material having the potential to create dust shall not be loaded to a level higher than the side and tail boards, and shall be covered by a clean tarpaulin.	√			
▪ The designated site main haul road shall be paved or regular watering.	√			
▪ Frequent watering of work site shall be at least three times per day.	√			
▪ Wheel washing facilities including high-pressure water jet shall be provided at the entrance of work site.	√			
▪ Every vehicle shall be washed to remove any dusty materials from its body and wheels before leaving the fill bank.	√			
▪ All plant and equipment should be well maintained e.g. without black smoke emission.	√			
▪ Open burning should be prohibited.	√			
▪ The temporary slope surfaces, especially those facing to the north of the site shall be covered with impermeable sheet or sprayed with water or protected by other method approved by CEDD.	√			
▪ Final slope surfaces, especially those facing to the north of the site shall be treated by compaction, followed by hydroseeding, vegetation planting or sealing with shot concrete, latex, vinyl, bitumen, or other suitable surface stabilizer approved by CEDD.	√			
▪ When fill material is transfer by belt conveyor systems, the conveyors shall be enclosed on top and 2 sides.	√			
▪ The belt scraper shall be equipped with bottom plates or other similar means to prevent falling of material from the return belt.	√			
▪ The level of stockpiling belt conveyor shall be adjustable such that the vertical distance between the belt conveyor and the material landing point is maintained at no more than 1m.	√			
▪ Approval or exemption Non-road Mobile Machinery (NRMM) labels should be painted or securely fixed on regulated machines and non-road vehicles at a conspicuous position according to the Air Pollution Control (Non-road Mobile Machinery) (Emission) Regulation (APCO Cap.311).	√			
Noise Impact				
▪ The approved method of working, equipment and sound-reducing measures (e.g. use of silenced type of equipment, etc.) shall be adapted.	√			
▪ Only well maintained plant should be operated on-site and plant should be serviced regularly during the construction works.	√			
▪ Powered mechanical equipment (PME) should be covered or shielded by appropriate acoustic materials.	√			
▪ Air compressors and hand held breakers should have noise labels.	√			
▪ Machines and plants that may be in intermittent use should be shut down between work periods or should be throttled down to a minimum.	√			
▪ Noisy equipment and mobile plant shall always be site away from NSRs.	√			

Handling of Surplus Public Fill (2022-2023) - Tseung Kwan O Area 137 Fill Bank

Environmental Checklist	Implementation Stages*			Remark
	Yes	No	N/A	
Water Quality				
▪ Drainage system should be adequate and well maintained to prevent flooding and overflow, especially after rain storms.	√			
▪ The permanent drainage channels should have sediment basin, traps and baffles and maintain properly.	√			
▪ Temporary intercepting drains should be used at the stockpiling area to divert polluted stormwater to the intercepting channels. Earth bunds and sand bay barriers shall be used to assist the diversion of polluted stormwater to the intercepting channels.	√			
▪ Manholes should be covered and sealed.	√			
▪ Unnecessary water retained in receptacles and standing water should be avoided to prevent mosquito breeding.	√			
▪ A buffer distance of at least 100m shall be maintained between the boundary of the public fill stockpiling area and the sea front.	√			
▪ A buffer distance of at least 20m shall be maintained between the boundary of the C&DMSF and the seafront.	√			
▪ The stormwater intercepting system shall be effective to collect of runoff and remove suspended solids before discharge.	√			
▪ The temporary slope surfaces, especially those facing to the north of the site shall be covered with impermeable sheet or sprayed with water or protected by other method approved by CEDD.	√			
▪ Final slope surfaces, especially those facing to the north of the site shall be treated by compaction, followed by hydroseeding, vegetation planting or sealing with shotconcrete, latex, vinyl, bitumen, or other suitable surface stabilizer approved by CEDD.	√			
▪ Existing and newly constructed Catchpits, sand and silt removal facilities and intercepting channels shall be maintained, and the deposited silt and grit shall be removed weekly and on a need basis especially at the onset of and after each rainstorm to ensure that these facilities are functioning properly at all times.	√			
▪ A wheel washing bay shall be provided at the site exit and wash-water shall have sand and silt settled out or removed before being discharged into storm drains.	√			
▪ The section of construction road between wheel washing bay and the public road shall be paved with concrete, bituminous materials or hardcores to reduce vehicle tracking of soil and to prevent site run-off from entering public road drains.	√			
▪ Sewage from toilets shall be discharged in to a foul sewer, or chemical toilets shall be provided. The chemical toilets (if use) shall be provided by a licensed contractor, who will be responsible for disposal and maintenance of these facilities.	√			
▪ Oil intercept in addition of sand / silt removal facilities shall be provided at the car parking areas.	√			
▪ Oil interceptor shall be provided at work shop.	√			
▪ Tipping halls enclosed with top and 3-side to prevent spillage of material into marine water.	√			
▪ The barges shall be in right size such that adequate clearance is maintained between the vessels and the seabed at all states of the tide to ensure the undue turbidity is not generated by turbulence from vessel movement or propeller wash.	√			
▪ All vessels used for transportation of fill material shall have tight fitting seals to their bottom openings to prevent leakage of material during transport.	√			
▪ Adequate environmental control measures shall be provided to prevent / avoid dropping of fill material into the sea during the transfer.	√			
▪ Barges shall not be filled to a level which may cause the overflow of material during loading or transportation. Barge effluents shall be properly collected and treated before disposal.	√			
▪ The work activities shall not cause any visible foam, oil, grease, scum, litter or other objectionable matters to be present on the water in the vicinity of the barging facilities.	√			
▪ Existing silt curtain at the outward side of the basin near the Barging Handling Area (BHA) throughout the period shall be repair, maintain and service when there is public fill intake by barges to the Fill Bank in accordance with PS Clause 1.68. The total length of the silt curtains shall not be less than 160m, and a gap of about 80m shall be left open for access of barges. The silt curtain shall be properly maintained such that it can also serve the function of refuse containment boom to confine floating refuse.	√			
▪ A waste collection vessel shall be deployed to remove floating debris.	√			


Handling of Surplus Public Fill (2022-2023) - **Tseung Kwan O Area 137 Fill Bank**

Environmental Checklist	Implementation Stages*			Remark
	Yes	No	N/A	
Landscape and Visual				
<ul style="list-style-type: none"> The design of the fill bank and platform heights adopted should allow the fill bank to fit into the general topography of the surrounding land. Straight edged slopes should be avoided. 	√			
<ul style="list-style-type: none"> The maximum stockpiling height at the fill bank shall be limited to a maximum of +35.2mPD. 	√			
<ul style="list-style-type: none"> Surface of outer slopes of the fill bank shall preferably be hydroseeded or covered with geo-textile matting of appropriate colour (e.g. dark green / brown) once completed. 	√			
<ul style="list-style-type: none"> The barging point and the C&DMSF at the fill bank shall not be in operation from 07:00 pm to 08:00 am daily to avoid potential visual impact from glare. 	√			
Other Environmental Factors				
<ul style="list-style-type: none"> C&D waste sorted from mixed C&D material shall be removed from the temporary buffer storage area on a daily basis and transfer to SENT landfill for disposal. 	√			
<ul style="list-style-type: none"> Plan and stock construction materials carefully to minimise amount of waste generated and avoid unnecessary generation of waste. 	√			
<ul style="list-style-type: none"> Any unused materials or those with remaining functional capacity should be recycled and stored properly. 	√			
<ul style="list-style-type: none"> All generators, fuel and oil storage are within bundle areas. 	√			
<ul style="list-style-type: none"> Oil leakage from machinery, vehicle and plant is prevented. 	√			
<ul style="list-style-type: none"> The Environmental Permit should be displaced conspicuously on site. 	√			
<ul style="list-style-type: none"> Good site practices should be adopted to clean the rubbish and litter on a regular basis so as to prevent the rubbish and litter from dropping into the nearby environment. 	√			
<ul style="list-style-type: none"> To encourage collection of aluminium cans by individual collectors, separate labelled bins should be provided to segregate this waste from other general refuse generated by the workforce. 	√			

Summary of the Weekly Site Inspection:




Item	Details of defective works or observations	Proposed Follow Up Action	Photo Ref.	Further Action Required (Yes/No)	Follow up Date

Remark

	Name	Title	Signature	Date
Checked by	June Lau	ET Representative		18 January 2023

Handling of Surplus Public Fill (2022-2023) - Tseung Kwan O Area 137 Fill Bank

Inspection Date : 27-1-23
 Time : 14:30
 Weather : Sunny / Fine / Cloudy / Overcast / Drizzle / Rain / Storm / Hazy
 Wind : Calm / Light / Breeze / Strong
 Temperature : 18
 Humidity : High / Moderate / Low

Inspected by	CEDD	Contractor / Sub-Contractor	ET
Signature:			
Name:	HOK Ho Leung	KWOK WING LAN	Ricky Chan
Title	ALOW/PS	EO	Technician

Handling of Surplus Public Fill (2022-2023) - Tseung Kwan O Area 137 Fill Bank

Environmental Checklist	Implementation Stages*			Remark
	Yes	No	N/A	
Fugitive Dust Emission				
▪ Dust control / mitigation measures shall be provided to prevent dust nuisance.	√			
▪ A buffer zone of at least 100m shall be maintained between the edge of the stockpiling area and the nearest ASRs at the TKO Industrial Estate. Within the buffer zone, no dusty material shall be stockpiled and no loading / unloading and similar activities should be allowed.	√			
▪ Water sprays shall be provided and used to dampen materials.	√			
▪ Regular cleaning and watering the site shall be provided to minimize the fugitive dust emissions.	√			
▪ All vehicles shall be restrict to a maximum speed of 10 km per hour.	√			
▪ Any vehicle with open load carrying area used for moving materials which has the potential to create dust shall have properly fitting side and tail boards. Material having the potential to create dust shall not be loaded to a level higher than the side and tail boards, and shall be covered by a clean tarpaulin.	√			
▪ The designated site main haul road shall be paved or regular watering.	√			
▪ Frequent watering of work site shall be at least three times per day.	√			
▪ Wheel washing facilities including high-pressure water jet shall be provided at the entrance of work site.	√			
▪ Every vehicle shall be washed to remove any dusty materials from its body and wheels before leaving the fill bank.	√			
▪ All plant and equipment should be well maintained e.g. without black smoke emission.	√			
▪ Open burning should be prohibited.	√			
▪ The temporary slope surfaces, especially those facing to the north of the site shall be covered with impermeable sheet or sprayed with water or protected by other method approved by CEDD.	√			
▪ Final slope surfaces, especially those facing to the north of the site shall be treated by compaction, followed by hydroseeding, vegetation planting or sealing with shot concrete, latex, vinyl, bitumen, or other suitable surface stabilizer approved by CEDD.	√			
▪ When fill material is transfer by belt conveyor systems, the conveyors shall be enclosed on top and 2 sides.	√			
▪ The belt scraper shall be equipped with bottom plates or other similar means to prevent falling of material from the return belt.	√			
▪ The level of stockpiling belt conveyor shall be adjustable such that the vertical distance between the belt conveyor and the material landing point is maintained at no more than 1m.	√			
▪ Approval or exemption Non-road Mobile Machinery (NRMM) labels should be painted or securely fixed on regulated machines and non-road vehicles at a conspicuous position according to the Air Pollution Control (Non-road Mobile Machinery) (Emission) Regulation (APCO Cap.311).	√			
Noise Impact				
▪ The approved method of working, equipment and sound-reducing measures (e.g. use of silenced type of equipment, etc.) shall be adapted.	√			
▪ Only well maintained plant should be operated on-site and plant should be serviced regularly during the construction works.	√			
▪ Powered mechanical equipment (PME) should be covered or shielded by appropriate acoustic materials.	√			
▪ Air compressors and hand held breakers should have noise labels.	√			
▪ Machines and plants that may be in intermittent use should be shut down between work periods or should be throttled down to a minimum.	√			
▪ Noisy equipment and mobile plant shall always be site away from NSRs.	√			

Handling of Surplus Public Fill (2022-2023) - Tseung Kwan O Area 137 Fill Bank

Environmental Checklist	Implementation Stages*			Remark
	Yes	No	N/A	
Water Quality				
▪ Drainage system should be adequate and well maintained to prevent flooding and overflow, especially after rain storms.	√			
▪ The permanent drainage channels should have sediment basin, traps and baffles and maintain properly.	√			
▪ Temporary intercepting drains should be used at the stockpiling area to divert polluted stormwater to the intercepting channels. Earth bunds and sand bay barriers shall be used to assist the diversion of polluted stormwater to the intercepting channels.	√			
▪ Manholes should be covered and sealed.	√			
▪ Unnecessary water retained in receptacles and standing water should be avoided to prevent mosquito breeding.	√			
▪ A buffer distance of at least 100m shall be maintained between the boundary of the public fill stockpiling area and the sea front.	√			
▪ A buffer distance of at least 20m shall be maintained between the boundary of the C&DMSF and the seafront.	√			
▪ The stormwater intercepting system shall be effective to collect of runoff and remove suspended solids before discharge.	√			
▪ The temporary slope surfaces, especially those facing to the north of the site shall be covered with impermeable sheet or sprayed with water or protected by other method approved by CEDD.	√			
▪ Final slope surfaces, especially those facing to the north of the site shall be treated by compaction, followed by hydroseeding, vegetation planting or sealing with shotconcrete, latex, vinyl, bitumen, or other suitable surface stabilizer approved by CEDD.	√			
▪ Existing and newly constructed Catchpits, sand and silt removal facilities and intercepting channels shall be maintained, and the deposited silt and grit shall be removed weekly and on a need basis especially at the onset of and after each rainstorm to ensure that these facilities are functioning properly at all times.	√			
▪ A wheel washing bay shall be provided at the site exit and wash-water shall have sand and silt settled out or removed before being discharged into storm drains.	√			
▪ The section of construction road between wheel washing bay and the public road shall be paved with concrete, bituminous materials or hardcores to reduce vehicle tracking of soil and to prevent site run-off from entering public road drains.	√			
▪ Sewage from toilets shall be discharged in to a foul sewer, or chemical toilets shall be provided. The chemical toilets (if use) shall be provided by a licensed contractor, who will be responsible for disposal and maintenance of these facilities.	√			
▪ Oil intercept in addition of sand / silt removal facilities shall be provided at the car parking areas.	√			
▪ Oil interceptor shall be provided at work shop.	√			
▪ Tipping halls enclosed with top and 3-side to prevent spillage of material into marine water.	√			
▪ The barges shall be in right size such that adequate clearance in maintained between the vessels and the seabed at all states of the tide to ensure the undue turbidity is not generated by turbulence from vessel movement or propeller wash.	√			
▪ All vessels used for transportation of fill material shall have tight fitting seals to their bottom openings to prevent leakage of material during transport.	√			
▪ Adequate environmental control measures shall be provided to prevent / avoid dropping of fill material into the sea during the transfer.	√			
▪ Barges shall not be filled to a level which may cause the overflow of material during loading or transportation. Barge effluents shall be properly collected and treated before disposal.	√			
▪ The work activities shall not cause any visible foam, oil, grease, scum, litter or other objectionable matters to be present on the water in the vicinity of the barging facilities.	√			
▪ Existing silt curtain at the outward side of the basin near the Barging Handling Area (BHA) throughout the period shall be repair, maintain and service when there is public fill intake by barges to the Fill Bank in accordance with PS Clause 1.68. The total length of the silt curtains shall not be less than 160m, and a gap of about 80m shall be left open for access of barges. The silt curtain shall be properly maintained such that it can also serve the function of refuse containment boom to confine floating refuse.	√			
▪ A waste collection vessel shall be deployed to remove floating debris.	√			


Handling of Surplus Public Fill (2022-2023) - **Tseung Kwan O Area 137 Fill Bank**

Environmental Checklist	Implementation Stages*			Remark
	Yes	No	N/A	
Landscape and Visual				
<ul style="list-style-type: none"> The design of the fill bank and platform heights adopted should allow the fill bank to fit into the general topography of the surrounding land. Straight edged slopes should be avoided. 	√			
<ul style="list-style-type: none"> The maximum stockpiling height at the fill bank shall be limited to a maximum of +35.2mPD. 	√			
<ul style="list-style-type: none"> Surface of outer slopes of the fill bank shall preferably be hydroseeded or covered with geo-textile matting of appropriate colour (e.g. dark green / brown) once completed. 	√			
<ul style="list-style-type: none"> The barging point and the C&DMSF at the fill bank shall not be in operation from 07:00 pm to 08:00 am daily to avoid potential visual impact from glare. 	√			
Other Environmental Factors				
<ul style="list-style-type: none"> C&D waste sorted from mixed C&D material shall be removed from the temporary buffer storage area on a daily basis and transfer to SENT landfill for disposal. 	√			
<ul style="list-style-type: none"> Plan and stock construction materials carefully to minimise amount of waste generated and avoid unnecessary generation of waste. 	√			
<ul style="list-style-type: none"> Any unused materials or those with remaining functional capacity should be recycled and stored properly. 	√			
<ul style="list-style-type: none"> All generators, fuel and oil storage are within bundle areas. 	√			
<ul style="list-style-type: none"> Oil leakage from machinery, vehicle and plant is prevented. 	√			
<ul style="list-style-type: none"> The Environmental Permit should be displaced conspicuously on site. 	√			
<ul style="list-style-type: none"> Good site practices should be adopted to clean the rubbish and litter on a regular basis so as to prevent the rubbish and litter from dropping into the nearby environment. 	√			
<ul style="list-style-type: none"> To encourage collection of aluminium cans by individual collectors, separate labelled bins should be provided to segregate this waste from other general refuse generated by the workforce. 	√			

Summary of the Weekly Site Inspection:




Item	Details of defective works or observations	Proposed Follow Up Action	Photo Ref.	Further Action Required (Yes/No)	Follow up Date

Remark

	Name	Title	Signature	Date
Checked by	June Lau	ET Representative		27 January 2023

Handling of Surplus Public Fill (2022-2023) - Tseung Kwan O Area 137 Fill Bank

Inspection Date : 30.1.23
 Time : 14:30
 Weather : Sunny / ☉ / Cloudy / Overcast / Drizzle / Rain / Storm / Hazy
 Wind : Calm / ☉ / Breeze / Strong
 Temperature : 16
 Humidity : High / ☉ / Moderate / Low

Inspected by	CEDD	Contractor / Sub-Contractor	ET
Signature:			
Name:	YPT	Kwok Wing Lam	Chan Hor Lan
Title	SIW	EO	Technician

Environmental Checklist	Implementation Stages*			Remark
	Yes	No	N/A	
Fugitive Dust Emission				
▪ Dust control / mitigation measures shall be provided to prevent dust nuisance.	√			
▪ A buffer zone of at least 100m shall be maintained between the edge of the stockpiling area and the nearest ASRs at the TKO Industrial Estate. Within the buffer zone, no dusty material shall be stockpiled and no loading / unloading and similar activities should be allowed.	√			
▪ Water sprays shall be provided and used to dampen materials.	√			
▪ Regular cleaning and watering the site shall be provided to minimize the fugitive dust emissions.	√			
▪ All vehicles shall be restrict to a maximum speed of 10 km per hour.	√			
▪ Any vehicle with open load carrying area used for moving materials which has the potential to create dust shall have properly fitting side and tail boards. Material having the potential to create dust shall not be loaded to a level higher than the side and tail boards, and shall be covered by a clean tarpaulin.	√			
▪ The designated site main haul road shall be paved or regular watering.	√			
▪ Frequent watering of work site shall be at least three times per day.	√			
▪ Wheel washing facilities including high-pressure water jet shall be provided at the entrance of work site.	√			
▪ Every vehicle shall be washed to remove any dusty materials from its body and wheels before leaving the fill bank.	√			
▪ All plant and equipment should be well maintained e.g. without black smoke emission.	√			
▪ Open burning should be prohibited.	√			
▪ The temporary slope surfaces, especially those facing to the north of the site shall be covered with impermeable sheet or sprayed with water or protected by other method approved by CEDD.	√			
▪ Final slope surfaces, especially those facing to the north of the site shall be treated by compaction, followed by hydroseeding, vegetation planting or sealing with shot concrete, latex, vinyl, bitumen, or other suitable surface stabilizer approved by CEDD.	√			
▪ When fill material is transfer by belt conveyor systems, the conveyors shall be enclosed on top and 2 sides.	√			
▪ The belt scraper shall be equipped with bottom plates or other similar means to prevent falling of material from the return belt.	√			
▪ The level of stockpiling belt conveyor shall be adjustable such that the vertical distance between the belt conveyor and the material landing point is maintained at no more than 1m.	√			
▪ Approval or exemption Non-road Mobile Machinery (NRMM) labels should be painted or securely fixed on regulated machines and non-road vehicles at a conspicuous position according to the Air Pollution Control (Non-road Mobile Machinery) (Emission) Regulation (APCO Cap.311).	√			
Noise Impact				
▪ The approved method of working, equipment and sound-reducing measures (e.g. use of silenced type of equipment, etc.) shall be adapted.	√			
▪ Only well maintained plant should be operated on-site and plant should be serviced regularly during the construction works.	√			
▪ Powered mechanical equipment (PME) should be covered or shielded by appropriate acoustic materials.	√			
▪ Air compressors and hand held breakers should have noise labels.	√			
▪ Machines and plants that may be in intermittent use should be shut down between work periods or should be throttled down to a minimum.	√			
▪ Noisy equipment and mobile plant shall always be site away from NSRs.	√			

Handling of Surplus Public Fill (2022-2023) - Tseung Kwan O Area 137 Fill Bank

Environmental Checklist	Implementation Stages*			Remark
	Yes	No	N/A	
Water Quality				
▪ Drainage system should be adequate and well maintained to prevent flooding and overflow, especially after rain storms.	√			
▪ The permanent drainage channels should have sediment basin, traps and baffles and maintain properly.	√			
▪ Temporary intercepting drains should be used at the stockpiling area to divert polluted stormwater to the intercepting channels. Earth bunds and sand bay barriers shall be used to assist the diversion of polluted stormwater to the intercepting channels.	√			
▪ Manholes should be covered and sealed.	√			
▪ Unnecessary water retained in receptacles and standing water should be avoided to prevent mosquito breeding.	√			
▪ A buffer distance of at least 100m shall be maintained between the boundary of the public fill stockpiling area and the sea front.	√			
▪ A buffer distance of at least 20m shall be maintained between the boundary of the C&DMSF and the seafront.	√			
▪ The stormwater intercepting system shall be effective to collect of runoff and remove suspended solids before discharge.	√			
▪ The temporary slope surfaces, especially those facing to the north of the site shall be covered with impermeable sheet or sprayed with water or protected by other method approved by CEDD.	√			
▪ Final slope surfaces, especially those facing to the north of the site shall be treated by compaction, followed by hydroseeding, vegetation planting or sealing with shotconcrete, latex, vinyl, bitumen, or other suitable surface stabilizer approved by CEDD.	√			
▪ Existing and newly constructed Catchpits, sand and silt removal facilities and intercepting channels shall be maintained, and the deposited silt and grit shall be removed weekly and on a need basis especially at the onset of and after each rainstorm to ensure that these facilities are functioning properly at all times.	√			
▪ A wheel washing bay shall be provided at the site exit and wash-water shall have sand and silt settled out or removed before being discharged into storm drains.	√			
▪ The section of construction road between wheel washing bay and the public road shall be paved with concrete, bituminous materials or hardcore to reduce vehicle tracking of soil and to prevent site run-off from entering public road drains.	√			
▪ Sewage from toilets shall be discharged in to a foul sewer, or chemical toilets shall be provided. The chemical toilets (if use) shall be provided by a licensed contractor, who will be responsible for disposal and maintenance of these facilities.	√			
▪ Oil intercept in addition of sand / silt removal facilities shall be provided at the car parking areas.	√			
▪ Oil interceptor shall be provided at work shop.	√			
▪ Tipping halls enclosed with top and 3-side to prevent spillage of material into marine water.	√			
▪ The barges shall be in right size such that adequate clearance is maintained between the vessels and the seabed at all states of the tide to ensure the undue turbidity is not generated by turbulence from vessel movement or propeller wash.	√			
▪ All vessels used for transportation of fill material shall have tight fitting seals to their bottom openings to prevent leakage of material during transport.	√			
▪ Adequate environmental control measures shall be provided to prevent / avoid dropping of fill material into the sea during the transfer.	√			
▪ Barges shall not be filled to a level which may cause the overflow of material during loading or transportation. Barge effluents shall be properly collected and treated before disposal.	√			
▪ The work activities shall not cause any visible foam, oil, grease, scum, litter or other objectionable matters to be present on the water in the vicinity of the barging facilities.	√			
▪ Existing silt curtain at the outward side of the basin near the Barging Handling Area (BHA) throughout the period shall be repair, maintain and service when there is public fill intake by barges to the Fill Bank in accordance with PS Clause 1.68. The total length of the silt curtains shall not be less than 160m, and a gap of about 80m shall be left open for access of barges. The silt curtain shall be properly maintained such that it can also serve the function of refuse containment boom to confine floating refuse.	√			
▪ A waste collection vessel shall be deployed to remove floating debris.	√			


Handling of Surplus Public Fill (2022-2023) - **Tseung Kwan O Area 137 Fill Bank**

Environmental Checklist	Implementation Stages*			Remark
	Yes	No	N/A	
Landscape and Visual				
▪ The design of the fill bank and platform heights adopted should allow the fill bank to fit into the general topography of the surrounding land. Straight edged slopes should be avoided.	√			
▪ The maximum stockpiling height at the fill bank shall be limited to a maximum of +35.2mPD.	√			
▪ Surface of outer slopes of the fill bank shall preferably be hydroseeded or covered with geo-textile matting of appropriate colour (e.g. dark green / brown) once completed.	√			
▪ The barging point and the C&DMSF at the fill bank shall not be in operation from 07:00 pm to 08:00 am daily to avoid potential visual impact from glare.	√			
Other Environmental Factors				
▪ C&D waste sorted from mixed C&D material shall be removed from the temporary buffer storage area on a daily basis and transfer to SENT landfill for disposal.	√			
▪ Plan and stock construction materials carefully to minimise amount of waste generated and avoid unnecessary generation of waste.	√			
▪ Any unused materials or those with remaining functional capacity should be recycled and stored properly.	√			
▪ All generators, fuel and oil storage are within bundle areas.	√			
▪ Oil leakage from machinery, vehicle and plant is prevented.	√			
▪ The Environmental Permit should be displaced conspicuously on site.	√			
▪ Good site practices should be adopted to clean the rubbish and litter on a regular basis so as to prevent the rubbish and litter from dropping into the nearby environment.	√			
▪ To encourage collection of aluminium cans by individual collectors, separate labelled bins should be provided to segregate this waste from other general refuse generated by the workforce.	√			

Summary of the Weekly Site Inspection:

Item	Details of defective works or observations	Proposed Follow Up Action	Photo Ref.	Further Action Required (Yes/No)	Follow up Date

Remark

	Name	Title	Signature	Date
Checked by	June Lau	ET Representative		30 January 2023

Appendix I

Implementation Schedule of Mitigation Measures

Handling of Surplus Public Fill (2022-2023) – Tseung Kwan O Area 137 Fill Bank
 Contract No.: CV/2021/09

Environmental Mitigation Implementation Schedule

Environmental Protection Measures	Location	Implementation Status			
		Implemented	Partially implemented	Not implemented	Not Applicable
Air Quality					
▪ Dust control / mitigation measures shall be provided to prevent dust nuisance.	All areas		√		
▪ A buffer zone of at least 100m shall be maintained between the edge of the stockpiling area and the nearest ASRs at the TKO Industrial Estate. Within the buffer zone, no dusty material shall be stockpiled and no loading / unloading and similar activities should be allowed.	Northern Site Boundary	√			
▪ Water sprays shall be provided and used to dampen materials.	All areas	√			
▪ Regular cleaning and watering the site shall be provided to minimize the fugitive dust emissions.	All areas	√			
▪ All vehicles shall be restrict to a maximum speed of 10 km per hour.	All areas	√			
▪ Any vehicle with open load carrying area used for moving materials which has the potential to create dust shall have properly fitting side and tail boards. Material having the potential to create dust shall not be loaded to a level higher than the side and tail boards, and shall be covered by a clean tarpaulin.	Site Egress	√			
▪ The designated site main haul rout shall be paved or regular watering.	All haul roads	√			
▪ Frequent watering of work site shall be at least three times per day.	All areas	√			
▪ Wheel washing facilities including high pressure water jet shall be provided at the entrance of work site.	Site Egress	√			
▪ Every vehicle shall be washed to remove any dusty materials from its body and wheels before leaving the fill bank.	Site Egress	√			
▪ The temporary slope surfaces, especially those facing to the north of the site shall be covered with impermeable sheet or sprayed with water or protected by other method approved by CEDD.	All areas	√			
▪ Final slope surfaces, especially those facing to the north of the site shall be treated by compaction, followed by hydroseeding, vegetation planting or sealing with shotconcrete, latex, vinyl, bitumen, or other suitable surface stabilizer approved by CEDD.	All areas	√			
▪ When fill material is transfer by belt conveyor systems, the conveyors shall be enclosed on top and 2 sides.	C&DMSF	√			
▪ The belt scraper shall be equipped with bottom plates or other similar means to prevent falling of material from the return belt.	C&DMFS	√			
▪ The level of stockpiling belt conveyor shall be adjustable such that the vertical distance between the belt conveyor and the material landing point is maintained at no more than 1m.	C&DMFS	√			
▪ All plant and equipment should be well maintained e.g. without black smoke emission.	All areas	√			
▪ Approval or exemption Non-road Mobile Machinery (NRMM) labels should be painted or securely fixed on regulated machines and non-road vehicles at a conspicuous position according to the Air Pollution Control (Non-road Mobile Machinery) (Emission) Regulation (APCO Cap.311).	All areas		√		
Noise Impact					
▪ Approved method of working, equipment and sound-reducing measures (e.g. use of silenced type of equipment, etc.) shall be adapted.	All areas	√			
▪ Only well maintained plant should be operated on-site and plant should be serviced regularly during the site works.	All areas	√			
▪ Powered mechanical equipment (PME) should be covered or shielded by appropriate acoustic materials.	All areas	√			
▪ Air compressors and hand held breakers should have noise labels.	All areas	√			
▪ Machines and plants that may be in intermittent use should be shut down between work months or should be throttled down to a minimum.	All areas	√			
▪ Noisy equipment and mobile plant shall always be site away from NSRs.	All areas	√			

Handling of Surplus Public Fill (2022-2023) – Tseung Kwan O Area 137 Fill Bank
 Contract No.: CV/2021/09


Environmental Protection Measures	Location	Implementation Status			
		Implemented	Partially implemented	Not implemented	Not Applicable
Water Quality					
<ul style="list-style-type: none"> Drainage system should be adequate and well maintained to prevent flooding and overflow, especially after rain storms. 	All areas	√			
<ul style="list-style-type: none"> The permanent drainage channels should have sediment basin, traps and baffles and maintain properly. 	All areas	√			
<ul style="list-style-type: none"> Temporary intercepting drains should be used at the stockpiling area to divert polluted stormwater to the intercepting channels. Earth bunds and sand bay barriers shall be used to assist the diversion of polluted stormwater to the intercepting channels. 	All areas	√			
<ul style="list-style-type: none"> Manholes should be covered and sealed. 	All areas	√			
<ul style="list-style-type: none"> Unnecessary water retained in receptacles and standing water should be avoided to prevent mosquito breeding. 	All areas		√		
<ul style="list-style-type: none"> A buffer distance of at least 100m shall be maintained between the boundary of the public fill stockpiling area and the sea front. 	Public fill stockpiling area	√			
<ul style="list-style-type: none"> A buffer distance of at least 20m shall be maintained between the boundary of the C&DMFS and the seafront. 	C&DMFS	√			
<ul style="list-style-type: none"> The stormwater intercepting system shall be effective to collect of runoff and remove suspended solids before discharge. 	All areas	√			
<ul style="list-style-type: none"> The temporary slope surfaces, especially those facing to the north of the site shall be covered with impermeable sheet or sprayed with water or protected by other method approved by CEDD. 	Temporary Slopes	√			
<ul style="list-style-type: none"> Final slope surfaces, especially those facing to the north of the site shall be treated by compaction, followed by hydroseeding, vegetation planting or sealing with shotconcrete, latex, vinyl, bitumen, or other suitable surface stabilizer approved by CEDD. 	Temporary Slopes	√			
<ul style="list-style-type: none"> Existing and newly constructed Catchpits, sand and silt removal facilities and intercepting channels shall be maintained, and the deposited silt and grit shall be removed weekly and on a need basis especially at the onset of and after each rainstorm to ensure that these facilities are functioning properly at all times. 	All areas	√			
<ul style="list-style-type: none"> A wheel washing bay shall be provided at the site exit and wash-water shall have sand and silt settled out or removed before being discharged into storm drains. 	Wheel Washing facility	√			
<ul style="list-style-type: none"> The section of construction road between wheel washing bay and the public road shall be paved with concrete, bituminous materials or hardcore to reduce vehicle tracking of soil and to prevent site run-off from entering public road drains. 	Wheel Washing facility	√			
<ul style="list-style-type: none"> Sewage from toilets shall be discharged in to a foul sewer, or chemical toilets shall be provided. The chemical toilets (if use) shall be provided by a licensed contractor, who will be responsible for disposal and maintenance of these facilities. 	All areas	√			
<ul style="list-style-type: none"> Oil intercept in addition of sand / silt removal facilities shall be provided at the car parking areas and work shop. 	All areas	√			
<ul style="list-style-type: none"> Tipping halls enclosed with top and 3-side to prevent spillage of material into marine water. 	Barge Handling Area (BHA)	√			
<ul style="list-style-type: none"> The barges shall be in right size such that adequate clearance in maintained between the vessels and the seabed at all states of the tide to ensure the undue turbidity is not generated by turbulence from vessel movement or propeller wash. 	Barge Handling Area (BHA)	√			
<ul style="list-style-type: none"> All vessels used for transportation of fill material shall have tight fitting seals to their bottom openings to prevent leakage of material during transport. 	Barge Handling Area (BHA)	√			
<ul style="list-style-type: none"> Adequate environmental control measures shall be provided to prevent / avoid dropping of fill material into the sea during the transfer. 	Along the seafront	√			
<ul style="list-style-type: none"> Barges shall not be filled to a level which may cause the overflow of material during loading or transportation. Barge effluents shall be properly collected and treated before disposal. 	Barge Handling Area (BHA)	√			
<ul style="list-style-type: none"> The work activities shall not cause any visible foam, oil, grease, scum, litter or other objectionable matters to be present on the water in the vicinity of the barging facilities. 	Along the seafront	√			
<ul style="list-style-type: none"> Existing silt curtain at the outward side of the basin near the Barging Handling Area throughout the period shall be repair, maintain and service when there is public fill intake by barges to the Fill Bank in accordance with PS Clause 1.68. The total length of the silt curtains shall not be less than 160m, and a gap of about 80m shall be left open for access of barges. The silt curtain shall be properly maintained such that it can also serve the function of refuse containment boom to confine floating refuse. 	Along the seafront	√			
<ul style="list-style-type: none"> A waste collection vessel shall be deployed to remove floating debris. 	Along the seafront	√			

Handling of Surplus Public Fill (2022-2023) – Tseung Kwan O Area 137 Fill Bank
 Contract No.: CV/2021/09

Environmental Protection Measures	Location	Implementation Status			
		Implemented	Partially implemented	Not implemented	Not Applicable
Landscape and Visual					
<ul style="list-style-type: none"> The design of the fill bank and platform heights adopted should allow the fill bank to fit into the general topography of the surrounding land. Straight edged slopes should be avoided. 	All areas	√			
<ul style="list-style-type: none"> The maximum stockpiling height at the fill bank shall be limited to a maximum of +35.2mPD. 	Completed slopes	√			
<ul style="list-style-type: none"> Surface of outer slopes of the fill bank shall preferably be hydroseeded or covered with geo-textile matting of appropriate colour (e.g. dark green / brown) once completed. 	Site boundary	√			
<ul style="list-style-type: none"> The barging point and the C&DMSF at the fill bank shall not be in operation from 07:00 pm to 08:00 am daily to avoid potential visual impact from glare. 	All areas	√			
Other Environmental Factors					
<ul style="list-style-type: none"> C&D waste sorted from mixed C&D material shall be transfer to SENT landfill for disposal. 	All areas	√			
<ul style="list-style-type: none"> Plan and stock construction materials carefully to minimise generation of waste. 	All areas	√			
<ul style="list-style-type: none"> Any unused materials or those with remaining functional capacity should be recycled. 	All areas	√			
<ul style="list-style-type: none"> All generators, fuel and oil storage are within bunded areas. 	All areas	√			
<ul style="list-style-type: none"> Oil leakage from machinery, vehicle and plant is prevented. 	All areas		√		
<ul style="list-style-type: none"> The Environmental Permit should be displaced conspicuously on site. 	All areas	√			
<ul style="list-style-type: none"> Good site practices should be adopted to clean the rubbish and litter on a regular basis so as to prevent the rubbish and litter from dropping into the nearby environment. 	All areas	√			
<ul style="list-style-type: none"> To encourage collection of aluminium cans by individual collectors, separate labelled bins should be provided to segregate this waste from other general refuse generated by the workforce. 	All areas	√			

Appendix J

Site General Layout plan

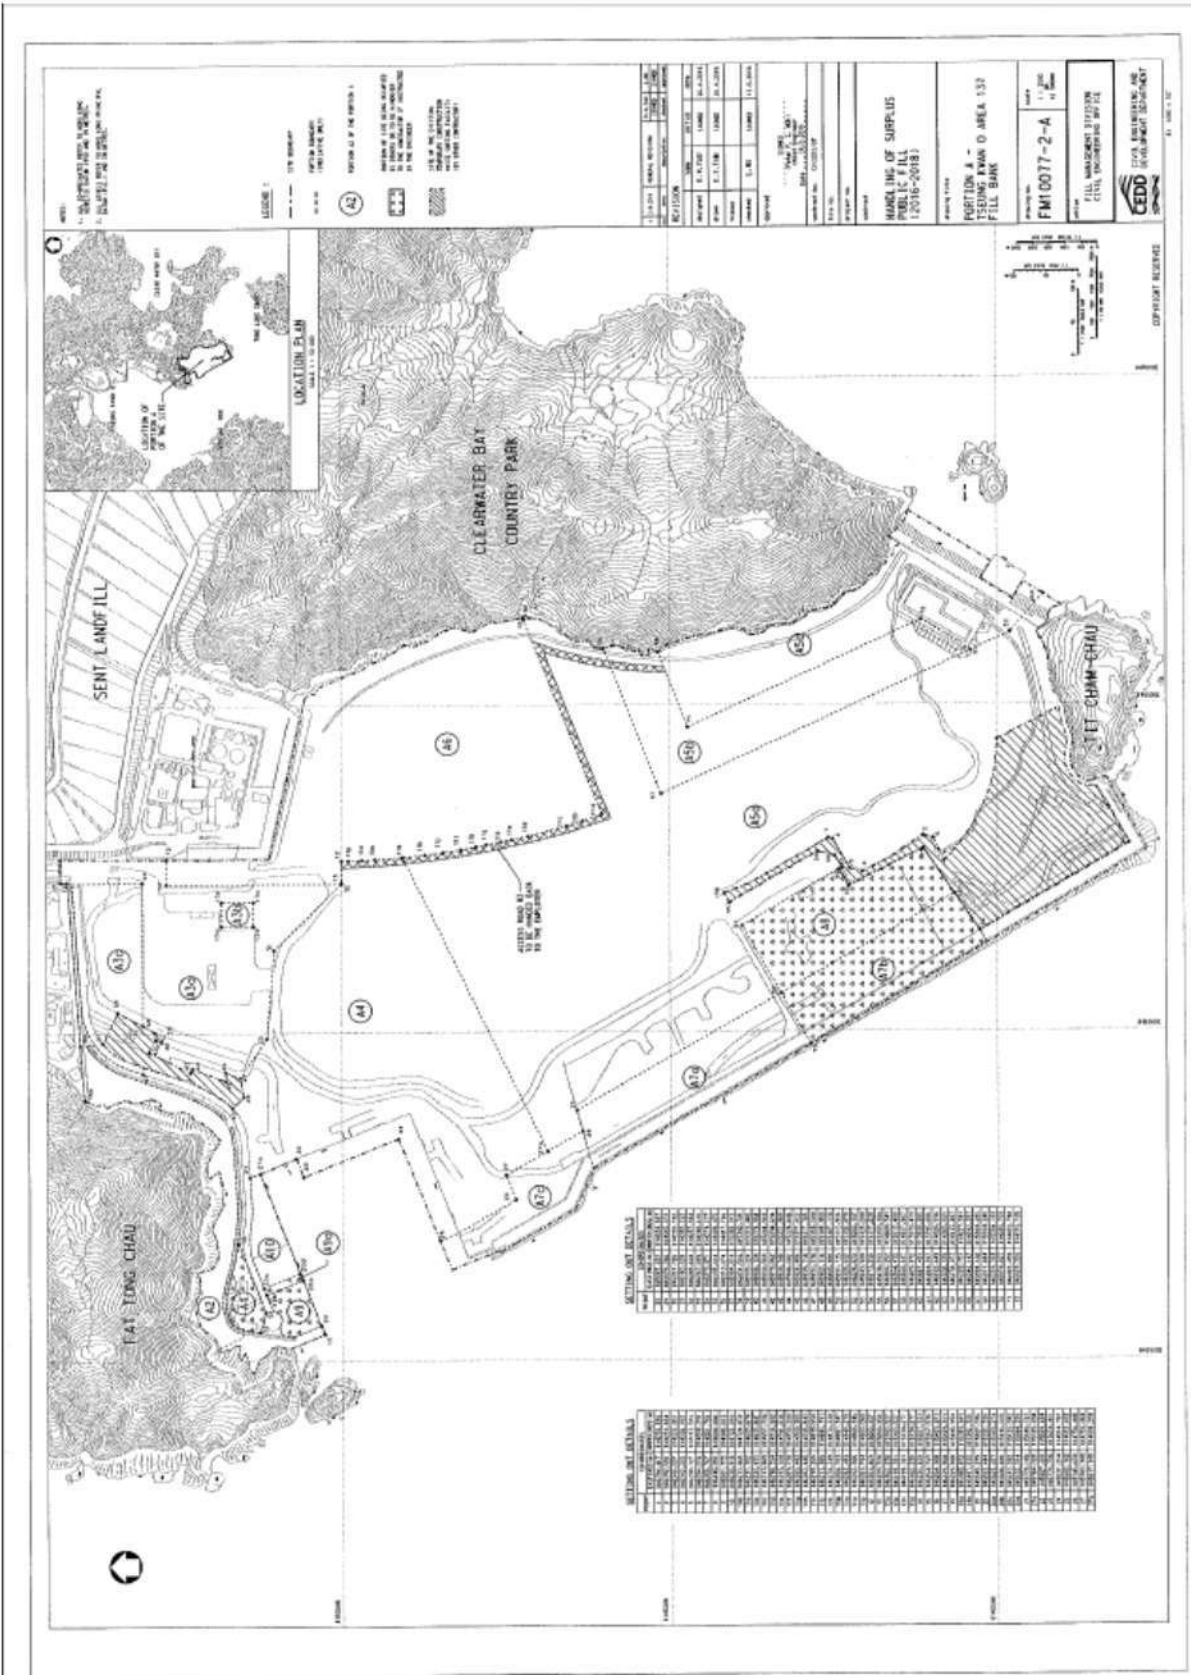

Appendix K

Monthly Summary Waste Flow Table

Monthly Summary Waste Flow Table for 2023

Appendix C

Month	Actual Quantities of Inert C&D Materials Generated Monthly						Actual Quantities of C&D Wastes Generated Monthly				
	Total Quantity Generated	Hard Rock and Large Broken Concrete	Reused in the Contract	Reused in other Projects	Disposed as Public Fill	Imported Fill	Metals	Paper/ cardboard packaging	Plastics (see Note 3)	Chemical Waste	Others, e.g. general refuse
	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in '000 kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)
Jan	0	0	0	0	0	0	158.46	0	0	0.071	100.72
Feb											
Mar											
Apr											
May											
Jun											
Sub-total											
Jul											
Aug											
Sep											
Oct											
Nov											
Dec											
Total											

- Notes:
- (1) The performance targets are given in **PS Clause 1.108(14)**.
 - (2) The waste flow table shall also include C&D materials that are specified in the Contract to be imported for use at the Site.
 - (3) Plastics refer to plastic bottles/containers, plastic sheets/foam from packaging material
 - (4) The *Contractor* shall also submit the latest forecast of the total amount of C&D materials expected to be generated from the *works*, together with a breakdown of the nature where the total amount of C&D materials expected to be generated from the *works* is equal to or exceeding 50,000 m³.

Appendix L

Monitoring Schedule for the Coming Month



Contract No. CV/2021/09 Handling of Surplus Public Fill (2022-2023)
Tseung Kwan O Area 137



Time Schedule for Impact Water Quality Monitoring (WQM), Impact Air Monitoring (1-hrTSP, 24-hr TSP and 24-hr RSP), Weekly Site Inspection (Weekly SI) and Impact Noise Monitoring
February 2023

Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
29-Jan	30-Jan	31-Jan	1-Feb	2-Feb	3-Feb	4-Feb
	1-hr TSP x 2 Weekly SI (pm) WQM Mid-flood (11:30-13:30) Mid-ebb (17:30-19:30)		1-hr TSP x 1 WQM Mid-flood (11:30-13:30) Mid-ebb (18:00-20:00)	24 hr TSP 24-hr RSP	1-hr TSP x 2	WQM Mid-flood (08:00-10:00) Mid-ebb (11:00-13:00)
5-Feb	6-Feb	7-Feb	8-Feb	9-Feb	10-Feb	11-Feb
	1-hr TSP x 1 NM WQM Mid-flood (08:00-10:00) Mid-ebb (12:00-14:00)		24 hr TSP 24-hr RSP Weekly SI (pm) WQM Mid-flood (08:30-10:30) Mid-ebb (13:00-15:00)		1-hr TSP x 2 Mid-flood (09:00-11:00) Mid-ebb (14:00-16:00)	
12-Feb	13-Feb	14-Feb	15-Feb	16-Feb	17-Feb	18-Feb
	1-hr TSP x 1 Mid-flood (09:00-11:00) Mid-ebb (16:00-18:00)	24 hr TSP 24-hr RSP	1-hr TSP x 2 Weekly SI (pm) Mid-flood (10:00-12:00) Mid-ebb (17:00-19:00)		1-hr TSP x 1	Mid-ebb (10:00-12:00) Mid-flood (14:30-16:30)
19-Feb	20-Feb	21-Feb	22-Feb	23-Feb	24-Feb	25-Feb
	24 hr TSP 24-hr RSP Mid-flood (08:00-10:00) Mid-ebb (12:00-14:00)		1-hr TSP x 2 Weekly SI (pm) Mid-flood (08:30-10:30) Mid-ebb (13:00-15:00)		1-hr TSP x 1 Mid-flood (09:00-11:00) Mid-ebb (14:00-16:00)	24 hr TSP 24-hr RSP
26-Feb	27-Feb	28-Feb	1-Mar	2-Mar	3-Mar	4-Mar
	1-hr TSP x 2 Mid-flood (09:00-11:00) Mid-ebb (16:00-18:00)		1-hr TSP x 1 Weekly SI (pm)		24 hr TSP 24-hr RSP	

Remark: 1. RSP measurement is not required in the EM&A manual and RSP would not presented in EM&A report.
2. TKO 137 Fill Bank is closed on General Holidays and Lunar New Year Eve

Contract No. CV/2021/09 Handling of Surplus Public Fill (2022-2023)
Tseung Kwan O Area 137



**Predicted tide schedule from the Hong Kong Observatory for Impact Water Quality Monitoring (WQM)
February 2023**

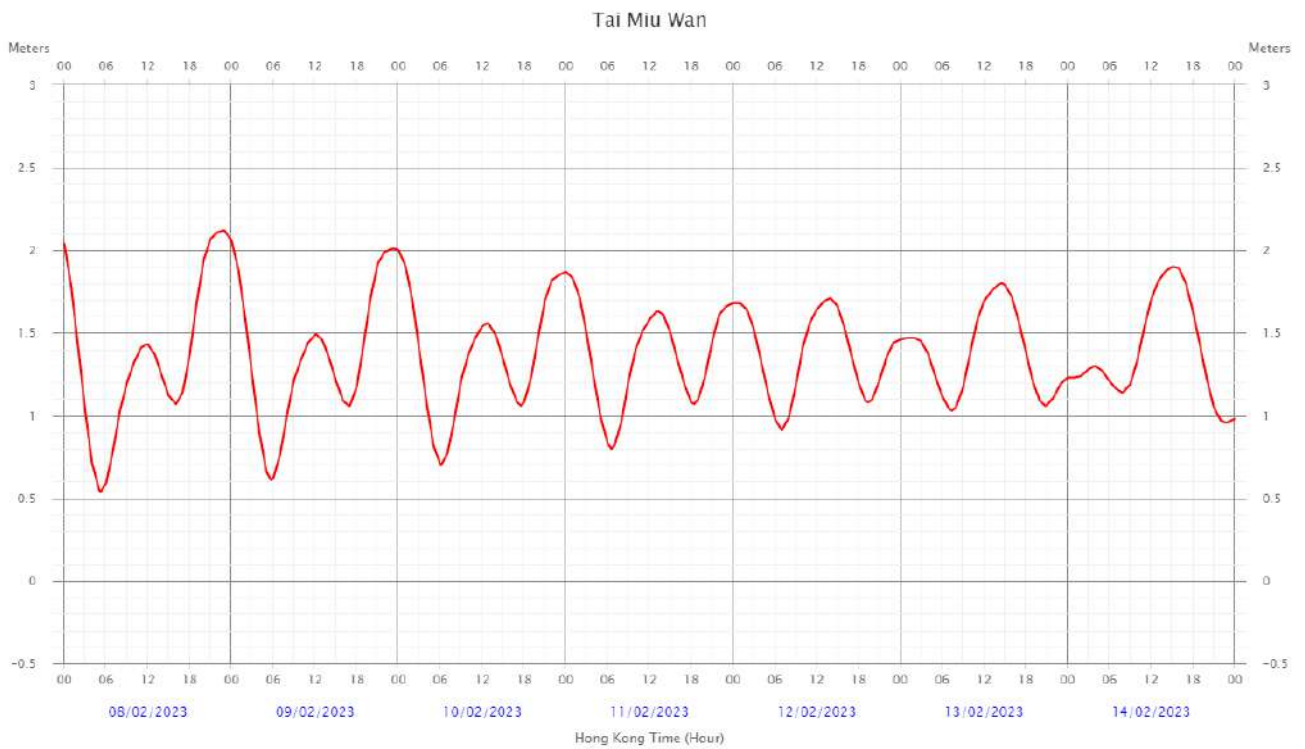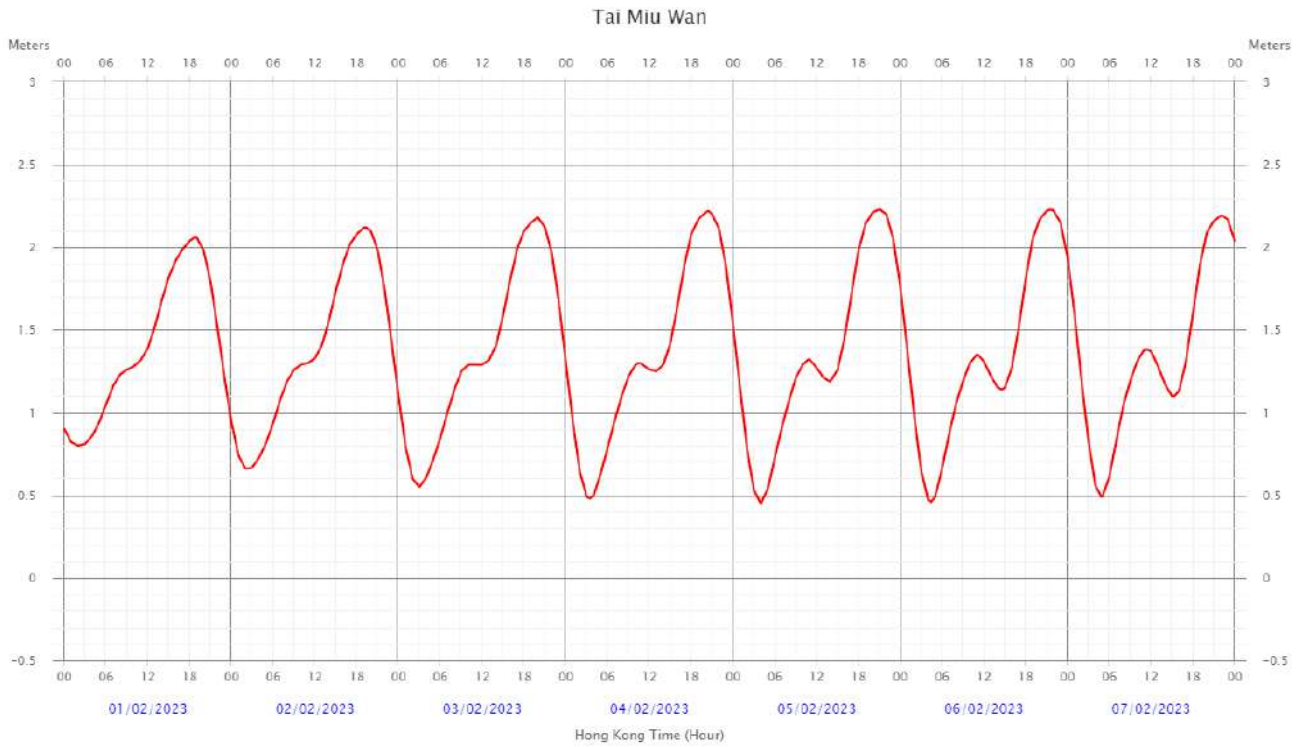

Contract No. CV/2021/09 Handling of Surplus Public Fill (2022-2023)
Tseung Kwan O Area 137

Predicted tide schedule from the Hong Kong Observatory for Impact Water Quality Monitoring (WQM)

February 2023

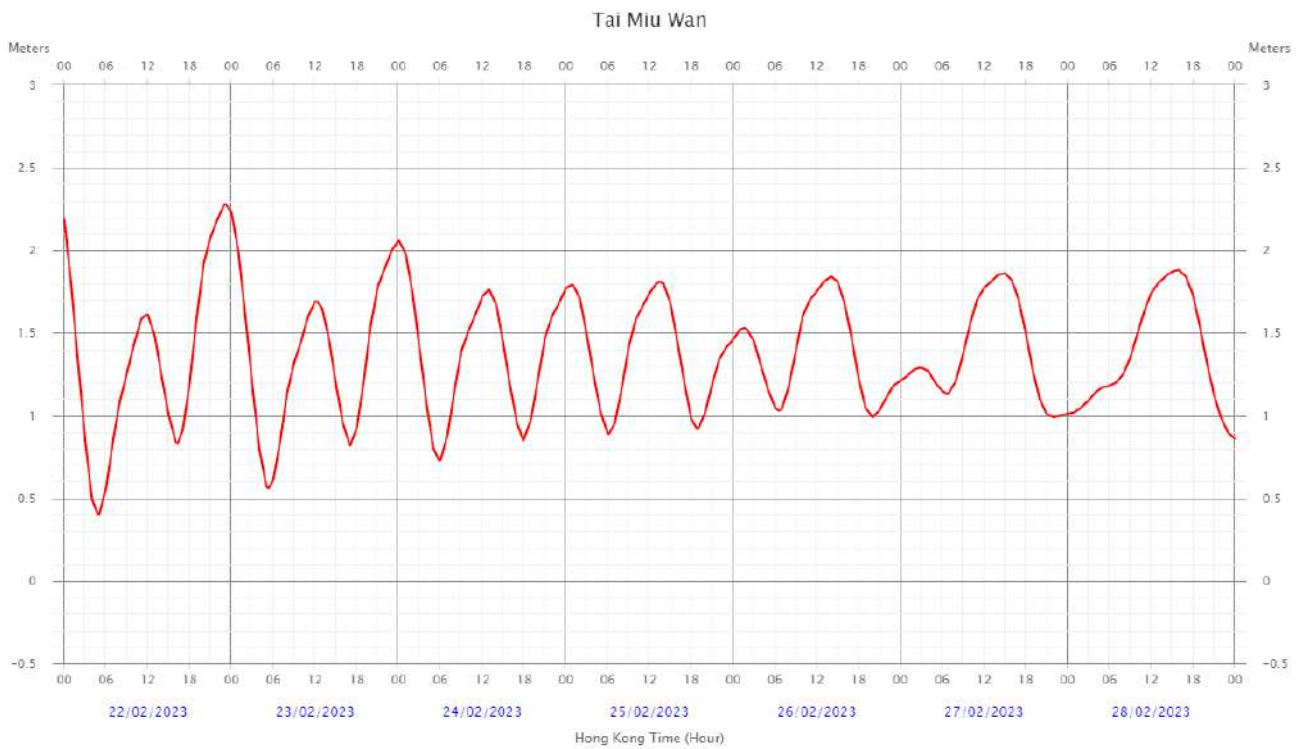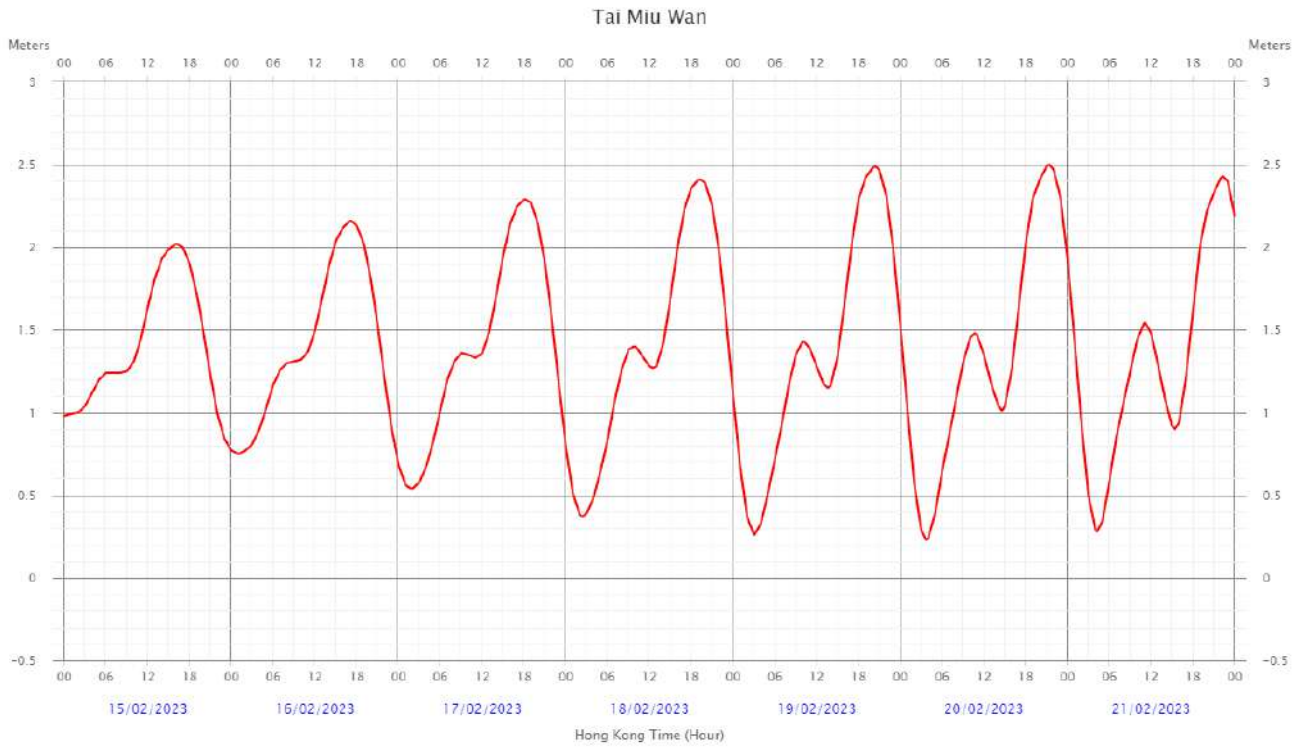

Appendix M

Reporting Month Monitoring Schedule



Contract No. CV/2021/09 Handling of Surplus Public Fill (2022-2023)
Tseung Kwan O Area 137

Time Schedule for Impact Water Quality Monitoring (WQM), Impact Air Monitoring (1-hrTSP, 24-hr TSP and 24-hr RSP), Weekly Site Inspection (Weekly SI) and Impact Noise Monitoring
January 2023

Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
25-Dec	26-Dec	27-Dec	28-Dec	29-Dec	30-Dec	31-Dec
			1-hr TSP x 3 Weekly SI (pm)	24 hr TSP 24-hr RSP WQM Mid-flood (10:30-12:30) Mid-ebb (16:30-18:30)		1-hr TSP x 2 WQM Mid-ebb (08:00-09:30) Mid-flood (12:00-14:00)
1-Jan	2-Jan	3-Jan	4-Jan	5-Jan	6-Jan	7-Jan
		1-hr TSP x 1 NM WQM Mid-ebb (08:30-10:30) Mid-flood (13:30-15:30)	24 hr TSP 24-hr RSP Weekly SI (pm)	WQM Mid-ebb (10:00-12:00) Mid-flood (15:00-17:00)	1-hr TSP x 2	WQM Mid-ebb (11:30-13:30) Mid-flood (16:00-18:00)
8-Jan	9-Jan	10-Jan	11-Jan	12-Jan	13-Jan	14-Jan
	1-hr TSP x 1 WQM Mid-flood (08:00-10:00) Mid-ebb (13:00-15:00)	24 hr TSP 24-hr RSP	1-hr TSP x 2 Weekly SI (pm) WQM Mid-flood (09:00-11:00) Mid-ebb (14:00-16:00)		1-hr TSP x 1 WQM Mid-flood (09:30-11:30) Mid-ebb (15:30-17:30)	
15-Jan	16-Jan	17-Jan	18-Jan	19-Jan	20-Jan	21-Jan
	24 hr TSP 24-hr RSP WQM Mid-flood (11:00-13:00) Mid-ebb (17:30-19:30)		1-hr TSP x 2 Weekly SI (pm) WQM Mid-ebb (08:30-10:30) Mid-flood (14:00-16:00)		1-hr TSP x 1 WQM Mid-ebb (10:30-12:30) Mid-flood (15:00-17:00)	24 hr TSP 24-hr RSP
22-Jan	23-Jan	24-Jan	25-Jan	26-Jan	27-Jan	28-Jan
				1-hr TSP x 3 WQM Mid-flood (10:00-12:00) Mid-ebb (15:00-17:00)	24 hr TSP 24-hr RSP Weekly SI (pm)	WQM Mid-flood (11:00-13:00) Mid-ebb (17:00-19:00)
29-Jan	30-Jan	31-Jan	1-Feb	2-Feb	3-Feb	4-Feb
	1-hr TSP x 2 Weekly SI (pm) WQM Mid-flood (11:30-13:30) Mid-ebb (17:30-19:30)		1-hr TSP x 1	24 hr TSP 24-hr RSP		

Remark: 1. RSP measurement is not required in the EM&A manual and RSP would not presented in EM&A report.
2. TKO 137 Fill Bank is closed on General Holidays and Lunar New Year Eve

Appendix N

Complaint Log

Complaint Logs

Log Ref.	Location	Received Date	Details of Complaint	Investigation / Mitigation Action	Status
001	Barge handling area (BHA) at Tseung Kwan O 137	15 May 2017	One complaint received on 15 May 2017, which was forwarded to ET on 11 August 2017, from CEDD (Complaint NCF-N08/RE/00014875-17 Sent By CSO[RN]3 [CASE#2-3943858817 Int.Comm. – WS170513A57354] against illegal dumping at sea without permit in TKO137 fill bank.	<p>Refer to the ET site investigation on 14 August 2017, the contractor clarified that the contractor conducted vessel loading test at Tseung Kwan O 137 Fill bank on 13 May 2017 and the material was then unloaded from the vessels.</p> <p>Follow up action to complaint by ET and contractor: Contractor under the valid dumping permit to dump fill materials and the site works shall be complied with the relevant environmental protection and pollution control ordinances.</p> <p>ET reminded contractor that the dump fill material under the valid dumping permit should be checked and confirmed. In addition, record should be kept for ET reference.</p> <p>Details of Action(s) Taken by the Contactor:</p> <ul style="list-style-type: none"> • The contractor started to dump fill materials from 19 May 2017 after receiving the valid dumping permit. • The contractor dump fill materials were followed by the valid dumping permit and the permit was kept apply every three month • The contractor kept the permit for ET reference. 	Closed
002	Tseung Kwan O 137 Fill Bank	12 Oct 2017	One complaint received on 12 October 2017, which was forwarded to ET on 18 October 2017, from public against dust emission at the fill bank and discharge of muddy water to the seafront.	<p>Refer to the ET weekly site inspection on 18 October 2017, no defective observation related to dust emission and discharge of water was recorded during the investigation.</p> <p>Details of Action(s) Taken by the Contactor:</p> <ul style="list-style-type: none"> • Regular water spraying by water lorries is provided for dust suppression inside the Fill Bank; • Mist spraying systems at the site entrance are operated properly; • Site vehicles are washed to remove any dusty materials from their bodies and wheels by using high pressure water jet manually at the entrance of work site before leaving; • All dusty material is sprayed with water prior to loading, unloading or transfer so as to maintain the material wet; • Site vehicle for transporting materials are covered properly by using clean tarpaulin sheets; • Regular cleaning at the site haul road is provided to minimize the fugitive dust emission; • Silt curtains are provided at the outward side of the basin near the Fill Bank; • Drainage systems are adequate and maintained to prevent flooding and overflow; • Catchpits, sand and silt removal facilities and intercepting channels are maintained and functioning properly. 	Closed

003	Tseung Kwan O 137 Fill Bank	09 April 2018	One complaint received on 09 April 2018, which was forwarded to ET on 18 April 2018, from public against the rocks and debris deposited on the road surface along Wan Po Road near TKO137 Fill Bank. The complainant complained that waste generated caused an environmental nuisance.	<p>Refer to the ET site investigation on 20 April 2018, the condition of Wan Po Road near TKO137 Fill Bank was found satisfactory. (Photos on ET follow-up investigation at TKO137 Fill Bank on 20 April 2018).</p> <p>Details of Action(s) Taken by the Contactor:</p> <ul style="list-style-type: none"> • Regular cleaning on Wan Po Road and the access road at the site exit by haul road cleaning team to remove mud and gravel is arranged eight times per month; • Regular water spraying by water lorries is provided for road cleaning at Wan Po Road; • Site vehicles are washed to remove any dusty materials from their bodies and wheels by using high pressure water jet manually at the entrance of work site before leaving; • Site vehicles for transporting materials are covered properly by using clean tarpaulin sheets; • Regular cleaning at the site haul road is provided. 	Closed
004	Tseung Kwan O 137 Fill Bank	13 January 2019	One complaint received on 13 January 2019, which was forwarded to ET on 16 January 2019, from EPD (NCF-N08/RE/00001348-19) against 將軍澳 137 堆填區內，缸車池污水，不經處理，直接排到河道，河道係直接流出大海，極度嚴重影響周遭環境生態，污染程度極為嚴重，促請政府有關部門嚴正跟進！	<p>After received the details of the complaint from the Contractor on 16 January 2019, ET have performed a site investigation on 21 January 2019 to investigate this event. During the site inspection, no muddy water was observed discharged from the Fill Bank to nearby environment.</p> <p>Besides, refer to the marine water monitoring results during that period, no exceedance was recorded on Turbidity and Suspended Solids. This reflects that this occurrence did not affect the condition of marine water near the TKO137Fill Bank.</p> <p>Details of Action(s) Taken by the Contactor:</p> <ul style="list-style-type: none"> • Drainage system were adequate and well maintained to prevent flooding and overflow; • Sand and silt removal facilities, e.g. silting screen, were provided before the discharge point; • Temporary intercepting drains were used at the stockpiling area to divert polluted stormwater to the intercepting channels. Earth bunds and sand bay barriers were used to assist the diversion of polluted stormwater to the intercepting channels; • Catchpits and intercepting channels were maintained, and the deposited silt and grit were removed weekly and on a need basis especially at the onset of and after each rainstorm to ensure that these facilities are functioning properly at all times; 	Closed

005	Tseung Kwan O 137 Fill Bank	14 May 2019	<p>One complaint received on 14 May 2019, which was forwarded to ET on 14 May 2019, from public against 投訴將軍澳第 137 區填料庫，有車出入沒有灑水傳出大量沙塵，破壞環境，帶出大量沙泥到馬路，造成污染及嚴重滋擾，要求跟進。要求改善，停止滋擾</p>	<p>Refer to the ET site investigation on 15 May 2019, the condition of Wan Po Road near TKO137 Fill Bank was found satisfactory. (Photos on ET follow-up investigation at TKO137 Fill Bank on 15 May 2019).</p> <p>Details of Action(s) Taken by the Contactor:</p> <ul style="list-style-type: none"> • Regular cleaning on Wan Po Road and the access road at the site exit by haul road cleaning team to remove mud and gravel is arranged eight times per month; • Regular water spraying by water lorries is provided for road cleaning at Wan Po Road; • Site vehicles are washed to remove any dusty materials from their bodies and wheels by using high pressure water jet manually at the entrance of work site before leaving; • Site vehicles for transporting materials are covered properly by using clean tarpaulin sheets; • Regular cleaning at the site haul road is provided. 	Closed
006	Tseung Kwan O 137 Fill Bank	11 June 2019	<p>One complaint received on 04 June 2019, which was forwarded to ET on 11 June 2019, from public regarding the muddy water problem at 137 fill bank.</p>	<p>After received the details of the complaint from the Contractor on 11 June 2019, ET have performed a site investigation on 14 June 2019 to investigate this event. During the site inspection, no muddy water was observed discharged from the Fill Bank to nearby environment.</p> <p>Besides, refer to the marine water monitoring results during that period, no exceedance was recorded on Turbidity and Suspended Solids during the concerning period. This reflects that this occurrence did not affect the condition of marine water near the TKO137Fill Bank.</p> <p>Details of Action(s) Taken by the Contactor:</p> <ul style="list-style-type: none"> • Drainage system were adequate and well maintained to prevent flooding and overflow; • Sand and silt removal facilities, e.g. silting screen, were provided before the discharge point; • Temporary intercepting drains were used at the stockpiling area to divert polluted stormwater to the intercepting channels. Earth bunds and sand bay barriers were used to assist the diversion of polluted stormwater to the intercepting channels; • Catchpits and intercepting channels were maintained, and the deposited silt and grit were removed weekly and on a need basis especially at the onset of and after each rainstorm to ensure that these facilities are functioning properly at all times; 	Closed

007	Tseung Kwan O 137 Fill Bank	27 June 2019	One complaint received on 27 June 2019, which was forwarded to ET on 28 June 2019, from public against dust emission at the fill bank. The complainant complained that the dust caused an environmental nuisance.	<p>Refer to the ET site investigation on 02 July 2019, no defective observation related to dust emission was recorded during the investigation.</p> <p>No impact air quality monitoring result of 1-hr TSP and 24-hr TSP was exceeded Action and Limit Level at all monitoring stations from 24 to 28 June 2019.</p> <p>Details of Action(s) Taken by the Contactor:</p> <ul style="list-style-type: none"> • Regular water spraying by water lorries is provided for dust suppression inside the Fill Bank; • Mist spraying systems at the site entrance are operated properly; • Site vehicles are washed to remove any dusty materials from their bodies and wheels by using high pressure water jet manually at the entrance of work site before leaving; • All dusty material is sprayed with water prior to loading, unloading or transfer so as to maintain the material wet; • Truck speed within the site is limited within 10 km/h; • Regular cleaning at the site haul road is provided to minimize the fugitive dust emission; 	Closed
008	Tseung Kwan O 137 Fill Bank	17 July 2019	One complaint received on 17 July 2019, which was forwarded to ET on 17 July 2019, from public against 投訴將軍澳堆填 137 區及收泥頭區，於運作時產生大量沙塵，嚴重污染周圍環境及影響行人，情況已持續發生了幾日	<p>Refer to the ET site investigation on 19 July 2019, no defective observation related to dust emission was recorded during the investigation.</p> <p>No impact air quality monitoring result of 1-hr TSP and 24-hr TSP was exceeded Action and Limit Level at all monitoring stations from 2 to 17 July 2019.</p> <p>Details of Action(s) Taken by the Contactor:</p> <ul style="list-style-type: none"> • Regular water spraying by water lorries is provided for dust suppression inside the Fill Bank; • Mist spraying systems at the site entrance are operated properly; • Site vehicles are washed to remove any dusty materials from their bodies and wheels by using high pressure water jet manually at the entrance of work site before leaving; • All dusty material is sprayed with water prior to loading, unloading or transfer so as to maintain the material wet; • Truck speed within the site is limited within 10 km/h; • Regular cleaning at the site haul road is provided to minimize the fugitive dust emission; 	Closed

009	Tseung Kwan O 137 Fill Bank	26 July 2019	One complaint received on 26 July 2019, which was forwarded to ET on 26 July 2019, from public against 投訴將軍澳第 137 區填料庫，大風吹起引致塵埃飛揚，更吹到 TVB，造成嚴重滋擾，要求跟進及回覆。	<p>Refer to the ET site investigation on 29 July 2019, no defective observation related to dust emission was recorded during the investigation.</p> <p>No impact air quality monitoring result of 1-hr TSP and 24-hr TSP was exceeded Action and Limit Level at all monitoring stations from 23 to 29 July 2019.</p> <p>Details of Action(s) Taken by the Contactor:</p> <ul style="list-style-type: none"> • Regular water spraying by water lorries is provided for dust suppression inside the Fill Bank; • Mist spraying systems at the site entrance are operated properly; • Site vehicles are washed to remove any dusty materials from their bodies and wheels by using high pressure water jet manually at the entrance of work site before leaving; • All dusty material is sprayed with water prior to loading, unloading or transfer so as to maintain the material wet; • Truck speed within the site is limited within 10 km/h; • Regular cleaning at the site haul road is provided to minimize the fugitive dust emission; 	Closed
010	Tseung Kwan O 137 Fill Bank	09 September 2019	One complaint received on 09 September 2019, which was forwarded to ET on 09 September 2019, from public against 投訴將軍澳第 137 區填料庫，大風吹起引致塵埃飛揚，更吹到日出康城，造成嚴重滋擾，要求跟進及回覆。	<p>Refer to the ET site investigation on 11 September 2019, no defective observation related to dust emission was recorded during the investigation.</p> <p>No impact air quality monitoring result of 1-hr TSP and 24-hr TSP was exceeded Action and Limit Level at all monitoring stations from 1 to 13 September 2019.</p> <p>Details of Action(s) Taken by the Contactor:</p> <ul style="list-style-type: none"> • Regular water spraying by water lorries is provided for dust suppression inside the Fill Bank; • Mist spraying systems at the site entrance are operated properly; • Site vehicles are washed to remove any dusty materials from their bodies and wheels by using high pressure water jet manually at the entrance of work site before leaving; • All dusty material is sprayed with water prior to loading, unloading or transfer so as to maintain the material wet; • Truck speed within the site is limited within 10 km/h; • Regular cleaning at the site haul road is provided to minimize the fugitive dust emission; 	Closed


011	Tseung Kwan O 137 Fill Bank	10 September 2019	One complaint received on 10 September 2019, which was forwarded to ET on 10 September 2019, from public against 投訴將軍澳 137 區經常於處理建築廢料時沒有灑水，導致沙塵滾滾，嚴重污染環境，要求環保署跟進及回覆。	<p>Refer to the ET site investigation on 11 September 2019, no defective observation related to dust emission was recorded during the investigation.</p> <p>No impact air quality monitoring result of 1-hr TSP and 24-hr TSP was exceeded Action and Limit Level at all monitoring stations from 1 to 13 September 2019.</p> <p>Details of Action(s) Taken by the Contactor:</p> <ul style="list-style-type: none"> • Regular water spraying by water lorries is provided for dust suppression inside the Fill Bank; • Mist spraying systems at the site entrance are operated properly; • Site vehicles are washed to remove any dusty materials from their bodies and wheels by using high pressure water jet manually at the entrance of work site before leaving; • All dusty material is sprayed with water prior to loading, unloading or transfer so as to maintain the material wet; • Truck speed within the site is limited within 10 km/h; • Regular cleaning at the site haul road is provided to minimize the fugitive dust emission; 	Closed
012	Tseung Kwan O 137 Fill Bank	24 August 2021	One complaint received on 24 August 2021, which was forwarded to ET on 30 August 2021, from public against 投訴將軍澳第 137 區公眾填料庫，灑水不足，泥頭車引起大量塵埃。	<p>Refer to the ET site investigation on 30 August 2021, no defective observation related to dust emission was recorded during the investigation.</p> <p>No impact air quality monitoring result of 1-hr TSP and 24-hr TSP was exceeded Action and Limit Level at all monitoring stations from 20 August 2021 to 30 August 2021.</p> <p>Details of Action(s) Taken by the Contactor:</p> <ul style="list-style-type: none"> • Repairing work on water truck was conducted. • Regular water spraying by water lorries is provided for dust suppression inside the Fill Bank; • Mist spraying systems at the site entrance are operated properly; • Site vehicles are washed to remove any dusty materials from their bodies and wheels by using high pressure water jet manually at the entrance of work site before leaving; • All dusty material is sprayed with water prior to loading, unloading or transfer so as to maintain the material wet; • Truck speed within the site is limited within 10 km/h; • Regular cleaning at the site haul road is provided to minimize the fugitive dust emission; 	Closed

013	Tseung Kwan O 137 Fill Bank	25 November 2021	A complaint was received on 25 November 2021, which was forwarded to ET by email on 26 November 2021, from public against 投訴將軍澳 137 公眾填料庫地盤灑水不足, 大量塵埃, 吹到 TVB 電視城一帶, 問題一直無改善, 要求環保署跟進及電郵回覆	<p>Refer to the ET site investigation on 29 November 2021, no defective observation related to dust emission was recorded during the investigation.</p> <p>No impact air quality monitoring result of 1-hr TSP and 24-hr TSP was exceeded Action and Limit Level at all monitoring stations from 24 November 2021 to 29 November 2021.</p> <p>Details of Action(s) Taken by the Contactor:</p> <ul style="list-style-type: none"> • Regular water spraying by water lorries is provided for dust suppression inside the Fill Bank; • Mist spraying systems at the site area are operated properly; • Regular cleaning at the site haul road is provided to minimize the dust emission 	Closed
014	Tseung Kwan O 137 Fill Bank	18 July 2022	A complaint was received on 18 July 2022, which was forwarded to ET by email on 18 July 2022, from public against ” 投訴將軍澳第 137 區填料庫的塵埃很大, 吹向四周, 影響附近工作的人, 要求跟進及回覆”	<p>Refer to the ET site investigation on 20 July 2022, no defective observation related to dust emission was recorded during the investigation.</p> <p>No impact air quality monitoring result of 1-hr TSP and 24-hr TSP was exceeded Action and Limit Level at all monitoring stations from 15 July 2022 to 20 July 2022.</p> <p>Details of Action(s) Taken by the Contactor:</p> <ul style="list-style-type: none"> • Regular water spraying by water lorries is provided for dust suppression inside the Fill Bank; • Mist spraying systems at the site area are operated properly; • Regular cleaning at the site haul road is provided to minimize the dust emission 	Closed

015	Tseung Kwan O 137 Fill Bank	08 August 2022	A complaint was received on 08 August 2022, which was forwarded to ET by email on 08 August 2022, from public regarding muddy discharge near the Area 137 Fill Bank and Sorting Facility.	<p>Refer to the EPD inspection on 09 August 2022, a large area of exposed soil was observed next to the surface channel connecting to the outfall. Soil may be washed down the surface channel and causes muddy discharge.</p> <p>Refer to the ET site investigation on 12 August 2022, no defective observation related to muddy discharge was recorded during investigation.</p> <p>Details of Action(s) Taken by the Contactor:</p> <ul style="list-style-type: none"> • Filers or baffles were added to the outfall to intercept soil and other pollutants in the water before discharge. • Regular cleaning, especially the drainage system, was provided to prevent the runoff of muddy water. 	Closed
016	Tseung Kwan O 137 Fill Bank	12 August 2022	A complaint was received on 12 August 2022, which was forwarded to ET by email on 15 August 2022, from public against “I recently observed yellowish water flowing out to the sea, near the shore of the Tseung Kwan O Area 137 Fill Bank after rain in this week. Looking from outside the Area 137, there are a lot of soil exposed at the site. Could that be the source of soil being washed off to the sea?”	<p>Refer to the EPD inspection on 09 August 2022, a large area of exposed soil was observed next to the surface channel connecting to the outfall. Soil may be washed down the surface channel and causes muddy discharge.</p> <p>Refer to the ET site investigation on 12 and 17 August 2022, no defective observation related to muddy discharge was recorded during investigation.</p> <p>Details of Action(s) Taken by the Contactor:</p> <ul style="list-style-type: none"> • Filers or baffles were added to the outfall to intercept soil and other pollutants in the water before discharge. • Regular cleaning, especially the drainage system, was provided to prevent the runoff of muddy water. 	Closed


017	Tseung Kwan O 137 Fill Bank	25 October 2022	A complaint was received on 25 October 2022, which was forwarded to ET by email on 25 October 2022, from public against ” 投訴將軍澳 137 區填料庫今日早上出現小龍捲風將泥塵吹向小西灣一帶”	Refer to the ET site investigation on 26 October 2022, no defective observation related to dust emission was recorded during the investigation. Details of Action(s) Taken by the Contactor: <ul style="list-style-type: none"> • Regular water spraying by water lorries is provided for dust suppression inside the Fill Bank; • Regular cleaning at the site haul road is provided to minimize the dust emission 	Closed
018	Tseung Kwan O 137 Fill Bank	14 November 2022	A complaint was received on 14 November 2022, which was forwarded to ET by email on 14 November 2022, from public against ” complained the dust nuisance (the dark dust blowing around the sky and high PM 2.5) at Tseung Kwan O Area 137 Fill Bank , this has been going for a while .”	Refer to the ET site investigation on 14 November 2022, no defective observation related to dust emission was recorded during the investigation. Details of Action(s) Taken by the Contactor: <ul style="list-style-type: none"> • Regular water spraying by water lorries is provided for dust suppression inside the Fill Bank; • Regular cleaning at the site haul road is provided to minimize the dust emission 	Closed

Figures

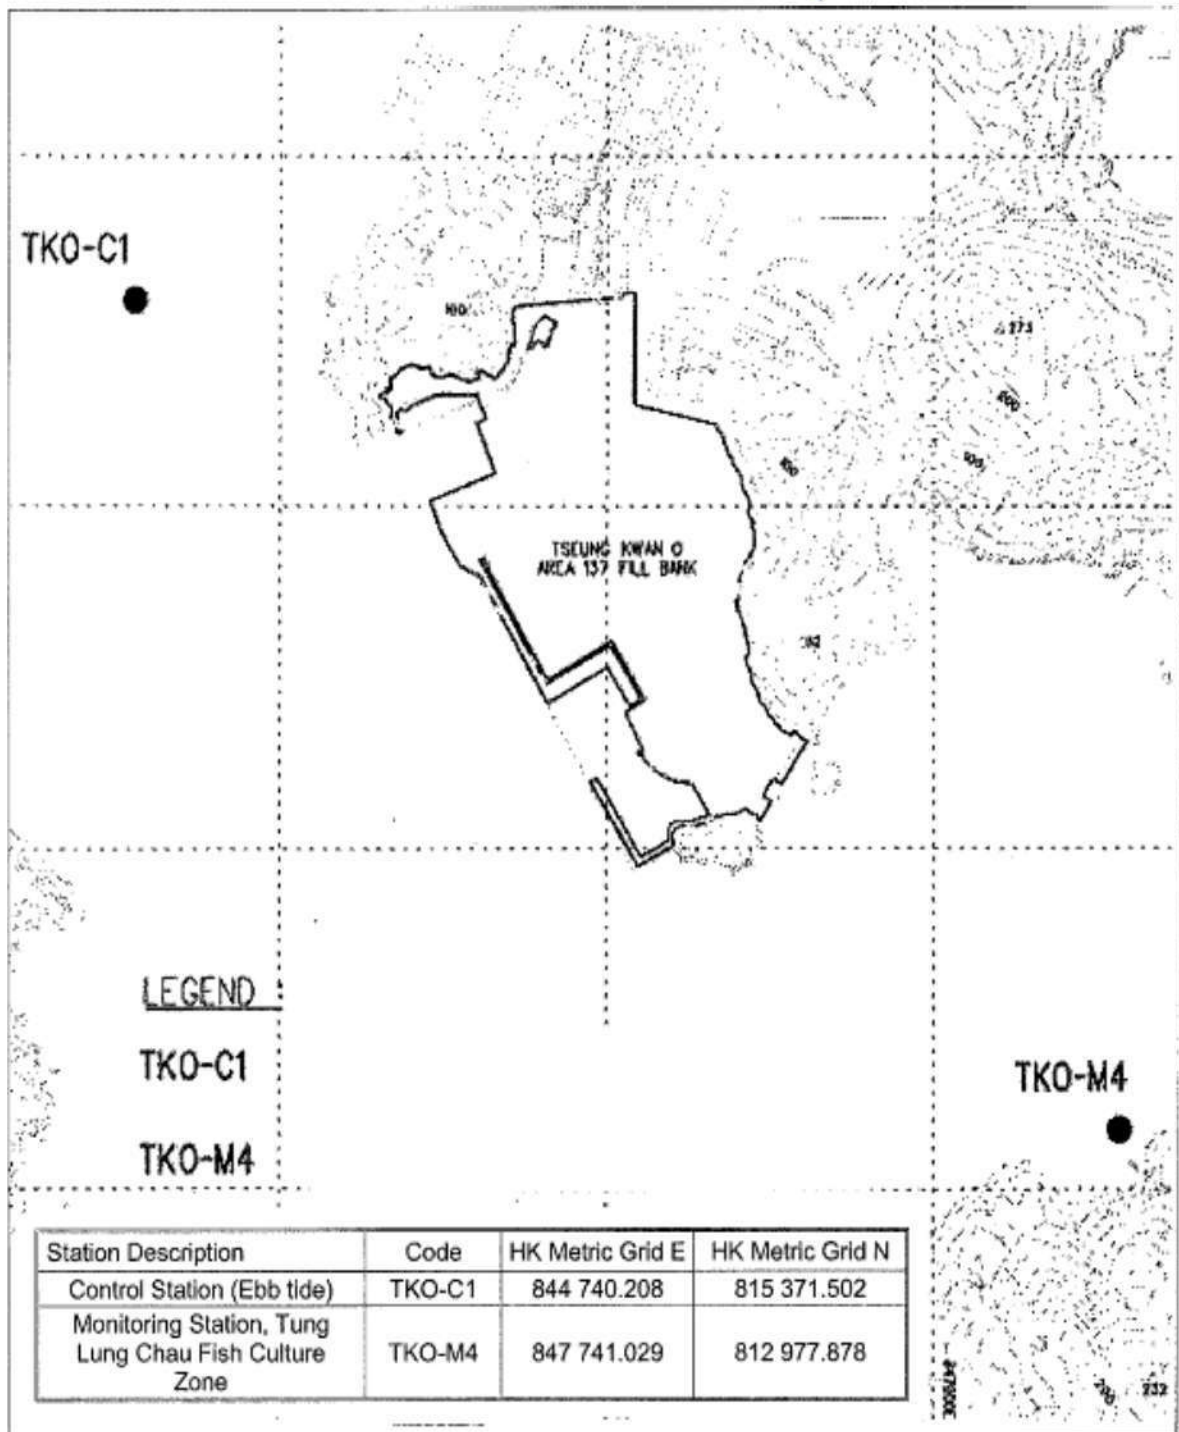


Contract No. CV/2015/07
Handling of Surplus Public Fill (2016-2018)

Figure 1
Locations of Water Quality Monitoring Stations –
Tseung Kwan O Area 137 Fill Bank

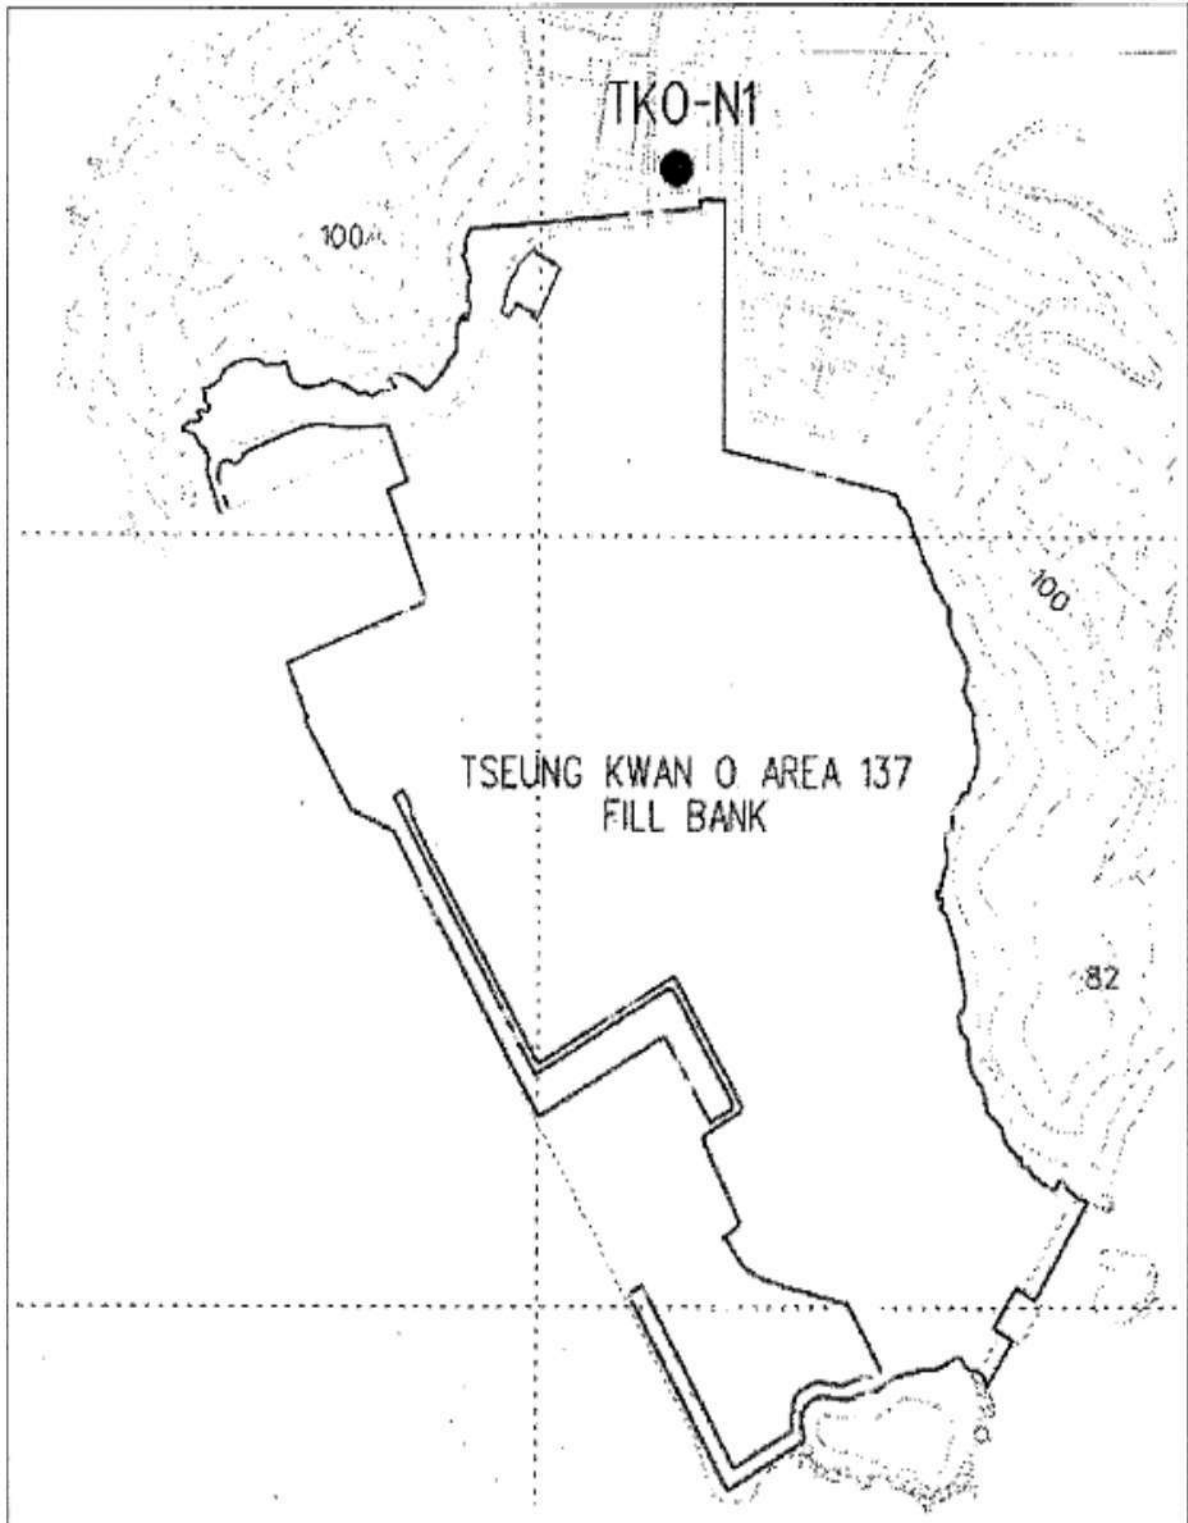


Contract No. CV/2015/07
Handling of Surplus Public Fill (2016-2018)

Figure 2
Location of Noise Monitoring Station –
Tseung Kwan O Area 137 Fill Bank

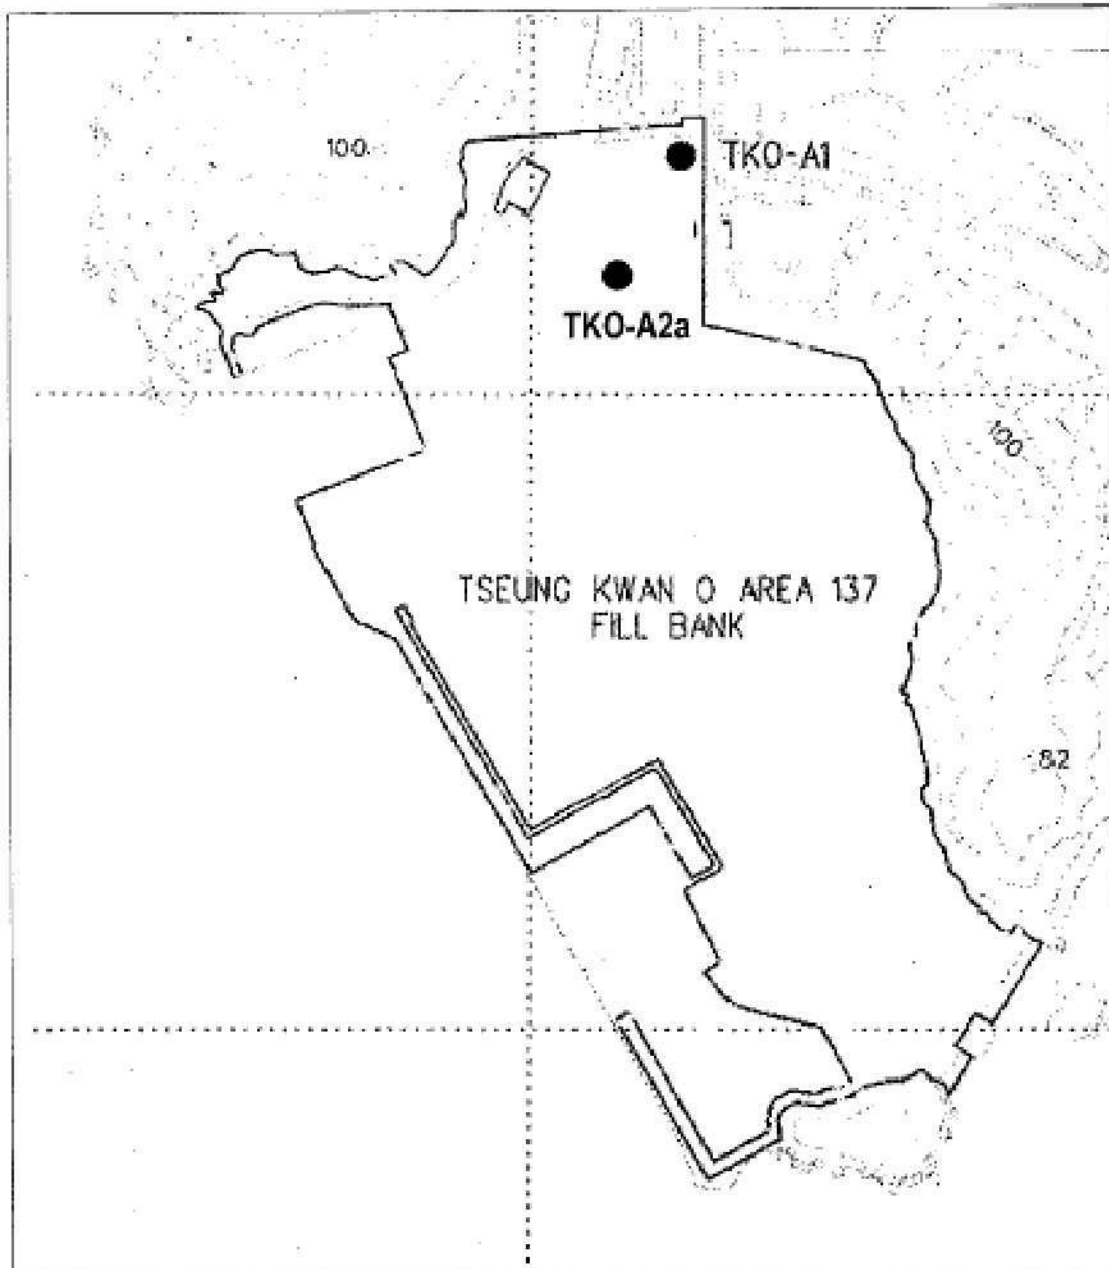

Contract No. CV/2015/07
Handling of Surplus Public Fill (2016-2018)

Figure 3
Locations of Air Quality Monitoring Stations –
Tseung Kwan O Area 137 Fill Bank

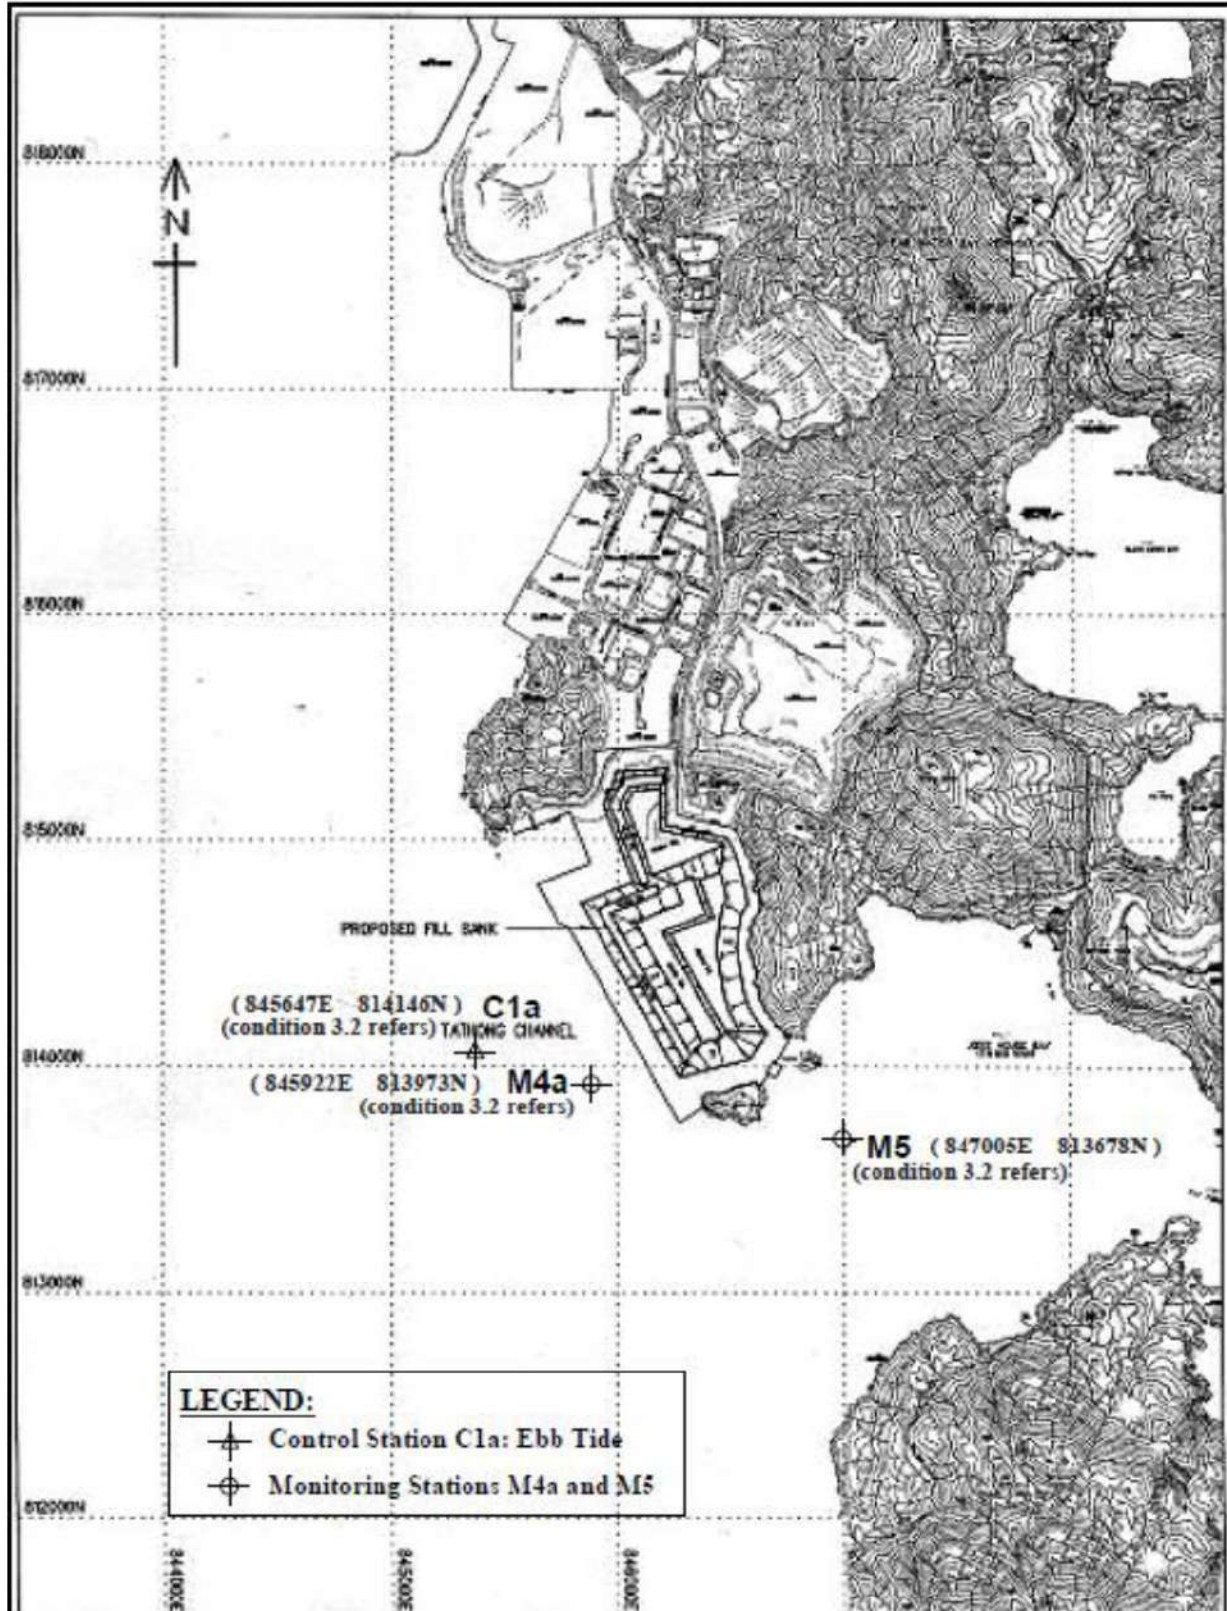

Contract No. CV/2015/07
 Handling of Surplus Public Fill(2016-2018)

Figure 4
 Locations of Additional Water Quality Monitoring Stations (3RS
 project)
 Tsung Kwan O Area 137 Fill Bank