


1. The conductor is retracted by tension support of Dyneema rope, then the Dyneema rope is retracted by tension support of 6mm rope.  
 1. 迪尼瑪繩索以張力支撐收回導體，然後用6毫米繩索以張力支撐收回迪尼瑪繩索

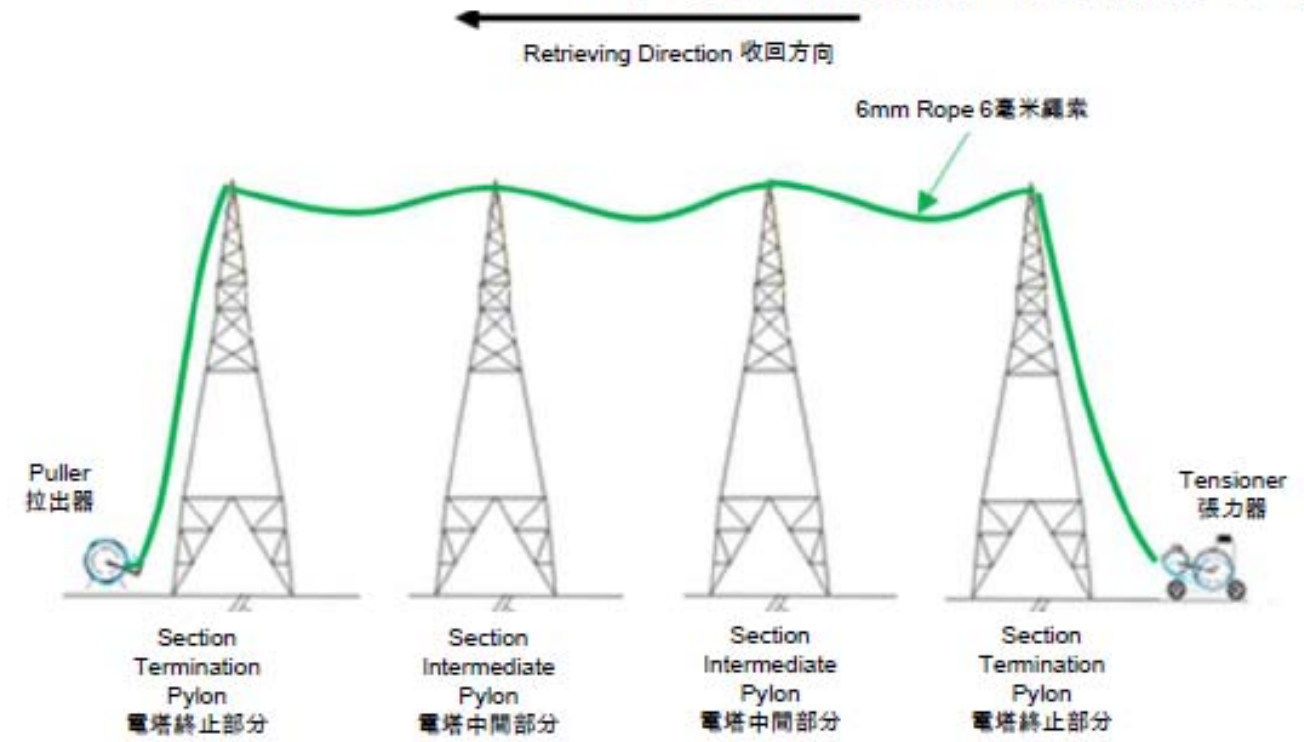

2. When the whole session is covered by the 6mm rope, then the 6mm rope is gently lowered down to the ground level.  
 2. 當整個部分被6毫米繩索覆蓋時，將6毫米繩索輕輕下降到地面水平

<p>Project Title                  工程項目名稱</p>	<p>Removal of 132kV Overhead Line and Pylons for P-Line                  柏架段 132kV 架空電纜及電纜塔的拆除工程</p>	<p>Environmental Permit No.: EP-603/2022                  環境許可證編號: EP-603/2022</p>
<p>Figure 8:                  圖 8:</p>	<p>Work Method - Retraction of Conductor and Retrieval of Dyneema Rope (Page 1 of 2)                  施工方法 - 收回導體和迪尼瑪繩索 (第 1 頁, 共 2 頁)</p>	