

Hong Kong International Theme Parks Ltd

Environmental Monitoring and  
Audit for the Operation of the  
Hong Kong Disneyland Resort:  
*Monthly Environmental Monitoring  
and Audit Report*

*(12 April 2016 – 11 May 2016)*

May 2016

**Environmental Resources Management**

16/F Berkshire House  
25 Westlands Road  
Quarry Bay, Hong Kong  
Telephone: (852) 2271 3000  
Facsimile: (852) 2723 5660  
E-mail: [post.hk@erm.com](mailto:post.hk@erm.com)  
<http://www.erm.com>

MONTHLY ENVIRONMENTAL  
MONITORING & AUDIT REPORT

Hong Kong International Theme Parks Ltd


Environmental Monitoring and  
Audit for the Operation of the  
Hong Kong Disneyland Resort:  
*Monthly Environmental Monitoring  
and Audit Report*  
(12 April 2016 – 11 May 2016)

May 2016


Reference 0055800

For and on behalf of  
ERM-Hong Kong, Limited

Approved by: Frank Wan

Signed: 

Position: Partner



Certified by: (Environmental Team Leader – Mandy To)

Date: 24 May 2016

This report has been prepared by ERM-Hong Kong, Limited with all reasonable skill, care and diligence within the terms of the Contract with the client, incorporating our General Terms and Conditions of Business and taking account of the resources devoted to it by agreement with the client.

We disclaim any responsibility to the client and others in respect of any matters outside the scope of the above.

This report is confidential to the client and we accept no responsibility of whatsoever nature to third parties to whom this report, or any part thereof, is made known. Any such party relies on the report at their own risk.

## CONTENTS

|            |                                                                    |           |
|------------|--------------------------------------------------------------------|-----------|
|            | <i>EXECUTIVE SUMMARY</i>                                           | <i>I</i>  |
| <i>1</i>   | <i>INTRODUCTION</i>                                                | <i>1</i>  |
| <i>1.1</i> | <i>PURPOSE OF THE REPORT</i>                                       | <i>1</i>  |
| <i>1.2</i> | <i>PROJECT INFORMATION</i>                                         | <i>1</i>  |
| <i>1.3</i> | <i>STRUCTURE OF THE REPORT</i>                                     | <i>1</i>  |
| <i>2</i>   | <i>ENVIRONMENTAL MONITORING REQUIREMENT</i>                        | <i>2</i>  |
| <i>2.1</i> | <i>FIREWORKS AIR QUALITY</i>                                       | <i>2</i>  |
| <i>2.2</i> | <i>COMPLIANCE ASSESSMENT</i>                                       | <i>4</i>  |
| <i>2.3</i> | <i>FIREWORKS NOISE AND FIXED PLANT NOISE</i>                       | <i>5</i>  |
| <i>2.4</i> | <i>WASTE MANAGEMENT</i>                                            | <i>9</i>  |
| <i>2.5</i> | <i>TERRESTRIAL ECOLOGY</i>                                         | <i>10</i> |
| <i>2.6</i> | <i>MARINE ECOLOGY</i>                                              | <i>11</i> |
| <i>3</i>   | <i>MONITORING RESULTS</i>                                          | <i>12</i> |
| <i>3.1</i> | <i>AIR QUALITY</i>                                                 | <i>12</i> |
| <i>3.2</i> | <i>FIREWORKS NOISE AND FIXED PLANT NOISE</i>                       | <i>12</i> |
| <i>3.3</i> | <i>WASTE MONITORING</i>                                            | <i>13</i> |
| <i>3.4</i> | <i>TERRESTRIAL ECOLOGY</i>                                         | <i>14</i> |
| <i>3.5</i> | <i>MARINE ECOLOGY</i>                                              | <i>14</i> |
| <i>4</i>   | <i>ENVIRONMENTAL SITE INSPECTION</i>                               | <i>15</i> |
| <i>4.1</i> | <i>FUTURE KEY ISSUES</i>                                           | <i>15</i> |
| <i>5</i>   | <i>ENVIRONMENTAL NON-CONFORMANCE</i>                               | <i>16</i> |
| <i>5.1</i> | <i>SUMMARY OF MONITORING EXCEEDANCE</i>                            | <i>16</i> |
| <i>5.2</i> | <i>SUMMARY OF ENVIRONMENTAL COMPLAINT</i>                          | <i>16</i> |
| <i>5.3</i> | <i>SUMMARY OF ENVIRONMENTAL SUMMONS AND SUCCESSFUL PROSECUTION</i> | <i>16</i> |
| <i>6</i>   | <i>CONCLUSIONS</i>                                                 | <i>17</i> |

## ***LIST OF TABLES***

|           |                                                          |
|-----------|----------------------------------------------------------|
| Table 2.1 | Air Quality Monitoring Location                          |
| Table 2.2 | Sampling Schedule for Air Quality Monitoring             |
| Table 2.3 | Action and Limit Levels for Air Quality Monitoring       |
| Table 2.4 | Noise Monitoring Station                                 |
| Table 2.5 | Sampling Schedule for Noise Monitoring                   |
| Table 2.6 | Noise Measurement Equipments                             |
| Table 2.7 | Action and Limit Levels for Fixed Plant Noise Monitoring |
| Table 3.1 | Air Quality Monitoring Result                            |
| Table 3.2 | Fireworks Noise Monitoring Results                       |
| Table 3.3 | Fixed Plant Noise Monitoring Results                     |
| Table 3.4 | Quantities of Different Waste                            |

## ***LIST OF FIGURES***

|            |                                                        |
|------------|--------------------------------------------------------|
| Figure 2.1 | AM1 - Air Quality Monitoring Location at Discovery Bay |
| Figure 2.2 | NM1 – Rooftop of Cherish Court, Discovery Bay          |
| Figure 2.3 | NM2_1 – Sea Crest Villa Block D, Peng Chau             |
| Figure 2.4 | NM4 – Rooftop of Central Maintenance Building          |

## ***LIST OF ANNEXES***

|         |                                                                    |
|---------|--------------------------------------------------------------------|
| Annex A | Calibration Certificates for HVSs and Sound Level Meters           |
| Annex B | Weather Information                                                |
| Annex C | Detailed Laboratory Analysis Results                               |
| Annex D | Graphical Presentation of the Air Quality Monitoring Results       |
| Annex E | Graphical Presentation of the Fireworks Noise Monitoring Results   |
| Annex F | Graphical Presentation of the Fixed Plant Noise Monitoring Results |
| Annex G | Summary of Implementation Status                                   |

## EXECUTIVE SUMMARY

Hong Kong International Theme Parks Ltd (HKITP) started the operation of the Hong Kong Disneyland Resort on 12 September 2005. This Environmental Monitoring and Audit (EM&A) report presenting the EM&A work carried out during the period from 12 April 2016 to 11 May 2016 in accordance with the Operational EM&A Plan (Revision H) and the Environmental Permit EP-01/059/2000/C.

### Summary of Major Activities during Reporting Period

The major activities undertaken in the Theme Park were operation of theme attractions, rides, fireworks displays, ancillary restaurants, retail shops and servicing facilities. Office work and regular maintenance of machinery within the Theme Park were also undertaken in the Back-of-House Area. A new night parade has been introduced on 1 October 2014.

### Changes Identified in this Reporting Period

There were no changes in the provision of service and environmental condition.

### Summary of Breaches of A/L Levels

No exceedance of Action and Limit Levels for air quality, fireworks noise and fixed plant noise monitoring were recorded during this reporting period.

### Waste Management

HKITP has followed the approved Operational Waste Management Plan (OWMP) (Revision B) for handling of municipal solid waste, chemical waste, grease trap waste, food waste, green waste and fireworks waste. A recycling programme has been implemented to collect various types of recyclables. HKITP has also implemented different waste minimisation measures for preventing waste generation at source.

### Environmental Site Inspection

A joint environmental site inspection was carried out on 6 May 2016 by the representatives of the HKITP and ET. The Outdoor Vending, the restaurant of Corner Café and its associated RCP and green waste recycling were audited and no environmental concern was identified. The environmental performance for the different environmental issues (including air, water, noise, ecology and waste/chemical waste management) complied with environmental requirements and all necessary mitigation measures are properly implemented. No non-compliance in relation to the EIA recommendations was identified during the site inspection in this reporting period.

### Environmental Complaint

No environmental complaint was received in this reporting period.

#### Environmental Non-compliance/Summons/Prosecutions

No non-compliance associated with the operation of the resort was recorded in this reporting period.

No environmental summons was received in this reporting period.

#### Future Key Issues

Entertainment facilities and associated services within the Theme Park that will be provided in the coming monitoring period are the same as that provided in this reporting period. No potential environmental impacts are anticipated in the coming monitoring period.

**1.1 PURPOSE OF THE REPORT**

This Environmental Monitoring and Audit (EM&A) report summarises the monitoring results and audit findings for the EM&A programme for the operation of the Hong Kong Disneyland Resort (the Resort) during the reporting period from **12 April 2016** to **11 May 2016**.

**1.2 PROJECT INFORMATION**

The project background, duration, site description and management structure are all detailed in Section 2 of the first Monthly EM&A Report, and the organisation and lines of communication with respect to environmental matter are shown in Section 1 of the fourteenth Monthly EM&A Report.

**1.3 STRUCTURE OF THE REPORT**

The structure of the report is as follows:

**Section 1 : Introduction**

details the scope and structure of the report.

**Section 2 : Environmental Monitoring Requirement**

summarises the monitoring parameters, locations, dates, times, frequencies and durations, monitoring methodology in accordance with the requirement stipulated in the EIA report and Operational EM&A Plan.

**Section 3 : Monitoring Results**

summarises the monitoring results, weather conditions, QA/QC results and the data analysis for this reporting period.

**Section 4 : Environmental Site Inspection**

summarises the audit findings of the monthly site inspection undertaken within this reporting period and future key issues.

**Section 5 : Environmental Non-conformance**

summarises any monitoring exceedance, non-compliances, environmental complaints and environmental summons within this reporting period.

**Section 6 : Conclusions and Recommendations**

It was recommended in the Environmental Impact Assessment for *“Construction of an International Theme Park in Penny’s Bay of North Lantau and its Essential Associated Infrastructures”* (EIA Report) and stated in the Operational EM&A Plan (Revision H) that operation monitoring associated with Resort operation should be conducted for the following parameters:

- Fireworks Air Quality for the first year of the operation
- Fireworks Noise and Fixed Plant Noise from Resort
- Waste Management
- Terrestrial Ecology (White Bellied Sea Eagles) for a 2-year period when the Theme Park Phase II fireworks displays are launched

The EM&A requirements for these parameters are summarised in this section.

## 2.1

### *FIREWORKS AIR QUALITY*

Air quality monitoring during the first operational year was conducted once every 2 weeks in the first 2 months of operation and once every three months thereafter. Samples for RSP, barium, copper, and dioxins were collected over a 24-hour period, the same as in the baseline sampling. A total of eight sets of air monitoring were conducted in the first year of operation and the monitoring results are available on the Operational EM&A web-site for the Resort (<http://www.themeparkatpennysbay-op.com.hk/>). As recommended in the EIA Report, future monitoring programme after the first operational year should be developed based on the monitoring results in the first year of operation.

The Annual Review Report for the first year of operation with respect to air quality and the proposal of the monitoring program for the second year of operation was submitted to the Environmental Protection Department (EPD) on 21 November 2006, and the revised Operational EM&A Plan (Revision B) was approved by the EPD on 26 January 2007. Air quality monitoring during the third year of operation has been reviewed and the revised Operational EM&A Plan (Revision C) was approved by the EPD on 19 December 2007.

The air quality monitoring on the rooftop of Peng Lai Court, Peng Chau previously conducted in accordance with the approved EM&A Plan (Revision C) could no longer be carried out as the Owner’s Corporation of Peng Lai Court refused the ET to conduct any air quality monitoring at the property. The rooftop of Peng Chau Fire Station was identified as the only suitable location for the air quality monitoring but the proposal was rejected by the Fire Services Department. With suitable monitoring locations in Peng Chau exhausted, only the air quality monitoring location at Discovery Bay would

remain. As a result of the above, the location for air quality monitoring in the EM&A programme was reviewed. EPD confirmed in its letter of 11 August 2008 that the department had no objection to the termination of air quality monitoring at Peng Lai Court as proposed in the revised Operational EM&A Plan (Revision D). Operational EM&A Plan (Revision E) and Operational EM&A Plan (Revision F) were subsequently approved by the EPD on 21 November 2008 and 9 November 2009, respectively. The Operational EM&A Plan (Revision G) was submitted on 30 March 2012 for EPD's approval, and was approved on 11 April 2012. The following sections describe the proposed monitoring programme for air quality during the seventh operational year of the Resort.

### 2.1.1 Monitoring Locations

The designated air quality monitoring locations are described in *Table 2.1*.


**Table 2.1** *Air Quality Monitoring Location*

| Station ID | Description                                                 |
|------------|-------------------------------------------------------------|
| AM1        | Rooftop of Crestmont Villa Management Office, Discovery Bay |

#### *AM1 - Crestmont Villa Management Office, Discovery Bay*

Crestmont Villa Management Office (AM1) is a single storey high building, located approximately 2.7 km from the main launch area. The monitoring location was set at the rooftop approximately 5 m above the ground level, as shown in *Figure 2.1*.

**Figure 2.1** *AM1 - Air Quality Monitoring Location at Discovery Bay*

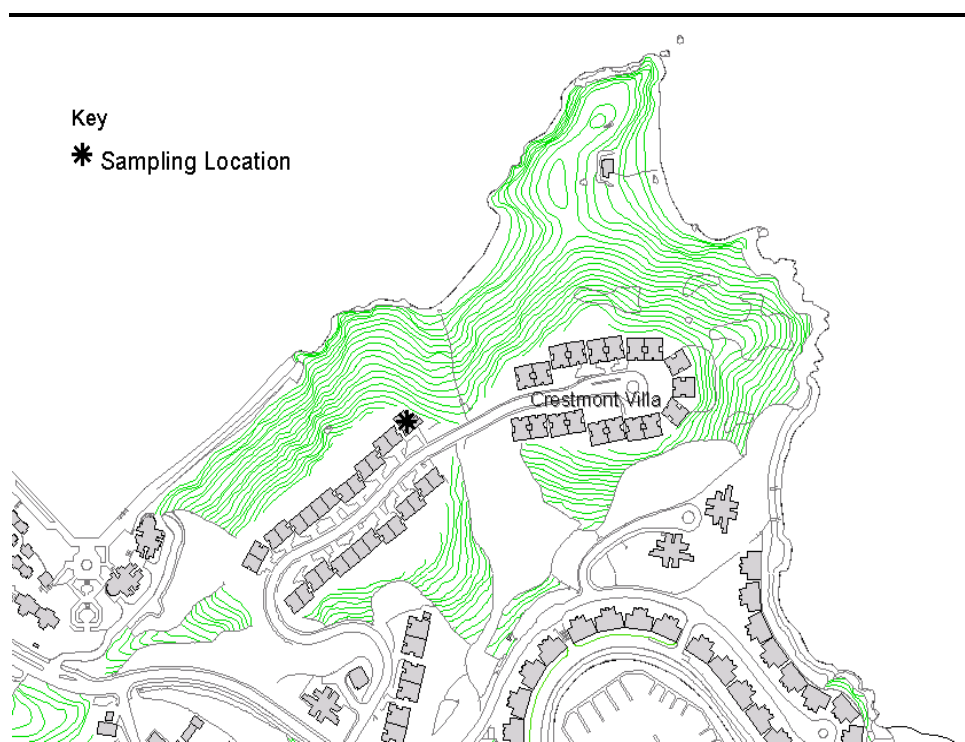

### 2.1.2 *Monitoring Parameter and Equipment*

#### *Respirable Suspended Particulates*

24-hour Respirable Suspended Particulates (RSP) monitoring was performed using an Anderson High Volume Sampler (HVS) equipment with PM<sub>10</sub> inlet located at the designated monitoring location in Discovery Bay.

### 2.1.3 *Monitoring Frequency and Duration*

Sample for RSP was collected over a 24-hour period in accordance with the schedule as presented in *Table 2.2*.

**Table 2.2** *Sampling Schedule for Air Quality Monitoring*

| Parameters | Sampling Time (hours) | Methodology         | Frequency                                                                  | Locations |
|------------|-----------------------|---------------------|----------------------------------------------------------------------------|-----------|
| RSP        | 24                    | USEPA Method IO-2.1 | Once every three months from the 2 <sup>nd</sup> year of operation onwards | AM1       |

### 2.1.4 *RSP Sampling and Analytical Method*

The measurement of RSP was conducted in accordance with USEPA method IO-2.1 <sup>(1)</sup>. Air sample was drawn through an 8 x 10 inch glass fibre filter with measured flow rate over duration of 24 hours. The net weight of RSP collected by particulate filter was determined by gravimetric analysis. The level of RSP in µgm<sup>-3</sup> was determined by dividing the total weight of particulate matters collected with the total standard volume of air sample.

A High Volume Sampler (HVS) was calibrated with a certified orifice type calibration kit. The filter was properly labeled and then sent to the laboratory of ALS Technichem (HK) Pty Ltd. The filter was equilibrated in the conditioning environment for 24 hours before weighing. The conditioning environment temperature was around 25 °C and not variable by more than ± 3°C; the relative humidity (RH) was < 50% and not variable by more than ± 5%. A convenient working RH was 40%. Glass fibre filter was conditioned prior to the initial and final weighing.

## 2.2 *COMPLIANCE ASSESSMENT*

The Action and Limit levels for 24-hour RSP monitoring are presented in *Table 2.3*.

**Table 2.3** *Action and Limit Levels for Air Quality Monitoring*

| Monitoring Station | 24-hour RSP (µg/m <sup>3</sup> ) |             |
|--------------------|----------------------------------|-------------|
|                    | Action Level                     | Limit Level |
| AM1                | 106                              | 180         |

(1) Reference to <http://www.epa.gov/ttn/amtic/files/ambient/inorganic/mthd-2-1.pdf>

During the operational phase, it is recommended that noise monitoring is undertaken at one on-site location and two off-site locations in order to assess fixed plant noise and noise from the fireworks displays respectively. The Operational EM&A Plan was updated (Revision H) for the change of an off-site monitoring location approved by the EPD. The following sections describe the requirements for noise monitoring during the operational phase of the park.

### 2.3.1 Monitoring Locations

The noise monitoring locations are summarised in *Table 2.4*.


**Table 2.4** Noise Monitoring Station

| NSR No. | Identity/Description                        | Parameters           |
|---------|---------------------------------------------|----------------------|
| NM1     | Rooftop of Cherish Court, Discovery Bay     | Noise from Fireworks |
| NM2_1   | Sea Crest Villa Block D, Peng Chau          | Noise from Fireworks |
| NM4     | Rooftop of the Central Maintenance Building | Fixed plant noise    |

#### *NM1 - Rooftop of Cherish Court, Discovery Bay*

Cherish Court is located approximately 2.4 km from the main launch area. The façade measurement location was set at rooftop of Cherish Court approximately 53 m above the ground level, with an unobstructed view overlooking HKDL. The monitoring location of the equipment set up is presented in *Figure 2.2*.


**Figure 2.2** NM1 – Rooftop of Cherish Court, Discovery Bay

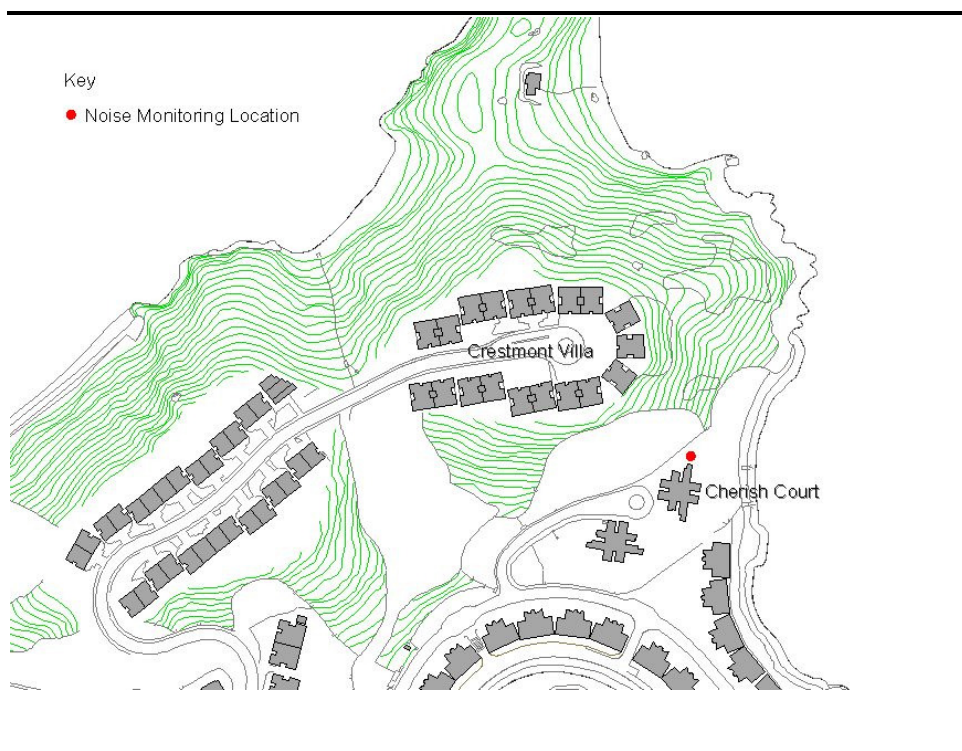

#### *NM2\_1 – Sea Crest Villa Block D, Peng Chau*

Sea Crest Villa Block D, Peng Chau is located approximately 2.7 km from the main launch area. The facade measurement location was set at 1.2 m above the ground level with a direct view over looking HKDL. The monitoring location of the equipment set up is presented in *Figure 2.3*.

**Figure 2.3** *NM2\_1 – Sea Crest Villa Block D, Peng Chau*

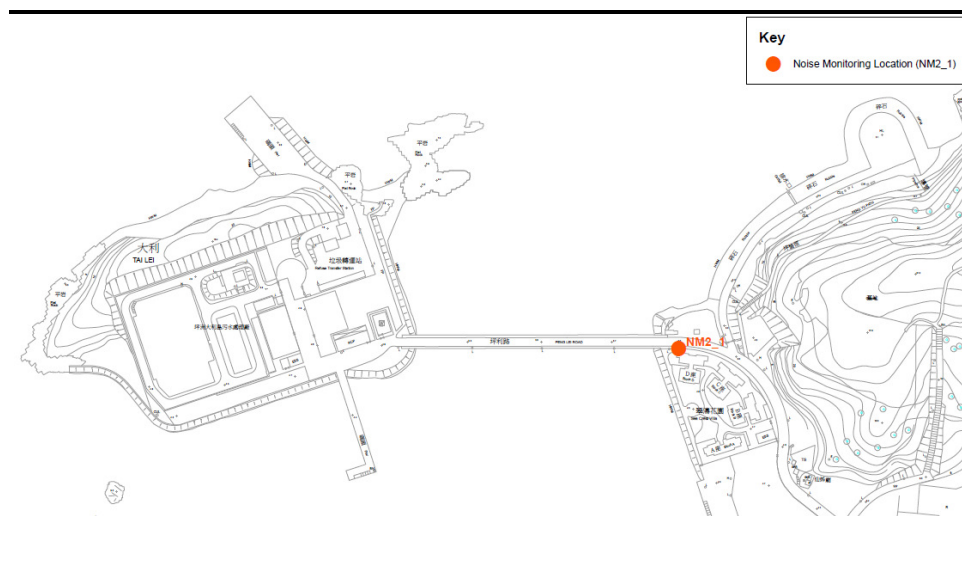

#### *NM4 – Rooftop of the Central Maintenance Building*

The rooftop of the Central Maintenance Building is about 9m above ground levels and will have an unshielded position overlooking the Resort. The monitoring location of the equipment set up is presented in *Figure 2.4*.

Figure 2.4 NM4 – Rooftop of Central Maintenance Building



### 2.3.2 Monitoring Parameters

#### *Fixed Plant Noise*

For fixed plant noise, six consecutive monitoring of  $L_{Aeq, 5 \text{ min}}$  reading were carried out to calculate the  $L_{Aeq, 30 \text{ min}}$  noise level.

#### *Fireworks Noise*

For fireworks noise, a  $L_{Aeq, 15 \text{ min}}$  measurement was taken for the 15 minutes timeframe that included all fireworks noise levels. Any significant influences on the measured noise levels were taken into account in accordance with standard acoustical principles and practices. The Corrected Noise Level created by the fireworks was computed based on the Background Noise Level and Measured Noise Level.

### 2.3.3 Monitoring Frequency and Duration

Following any significant changes to the park's operations or fireworks displays (such as the introduction of a new ride or a change in the type or number of fireworks included within the display), fixed plant noise and fireworks noise monitoring will be undertaken once every six days for one

month to ensure compliance with the noise criteria. At all other times, noise monitoring of fixed plant and fireworks noise will be undertaken once a month.

The monitoring programme is presented in *Table 2.5*.

**Table 2.5** *Sampling Schedule for Noise Monitoring*

| Parameters        | Sampling Time                                                                                           | Methodology                        | Frequency                                                                                                                                                                                                                                                                                                                                | Locations   |
|-------------------|---------------------------------------------------------------------------------------------------------|------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| Firework Noise    | L <sub>Aeq</sub> , 15min before, during and after the firework show within the period of 19:00 to 21:30 | IEC 651:1979 and 804:1985 (Type 1) | <ul style="list-style-type: none"> <li>once every 6 days for the first month of operation, thereafter once every month throughout the operation.</li> <li>monitoring will be undertaken once every six days for one month when there is a new ride or a change in the type or number of fireworks included within the display</li> </ul> | NM1 & NM2_1 |
| Fixed Plant Noise | 6 consecutive monitoring of L <sub>Aeq</sub> , 5 min                                                    | IEC 651:1979 and 804:1985 (Type 1) |                                                                                                                                                                                                                                                                                                                                          | NM4         |

#### 2.3.4 *Monitoring Methodology*

Facade noise measurements were carried out at NM1 and NM2\_1. The sound level meters and calibrator used for the noise monitoring, as listed in *Table 2.6* below, complies with IEC 651: 1979 and 804:1985 (Type 1) specification. Both microphones were positioned at 1m from a facade, which have a direct line of sight to the Resort perimeter.

Fixed plant noise monitoring was conducted within non-fireworks hours in accordance with the methodology stated in the Operational EM&A Plan (Revision H).

**Table 2.6** *Noise Measurement Equipments*

| Monitoring Location |                                    | Monitoring Equipment                                                       |
|---------------------|------------------------------------|----------------------------------------------------------------------------|
| NM1                 | Cherish Court, Discovery Bay       | Solo 01 Premium Sound Level Meter<br>01dB-Stell Cal 21 calibrator          |
| NM2_1               | Sea Crest Villa Block D, Peng Chau | Black solo 01 integrator sound level meter<br>01dB-Stell Cal 21 calibrator |
| NM4                 | Central Maintenance Building       | Solo 01 Premium Sound Level Meter<br>01dB-Stell Cal 21 calibrator          |

Noise monitoring was conducted with reference to the calibration and measurement procedures as stated in the *Technical Memorandum for the Assessment of Noise from Places other than Domestic Premises, Public Places or Construction Sites (IND-TM)*. Immediately prior to and following each noise measurement the accuracy of the monitoring equipments was checked using an acoustic calibrator generating a known sound pressure level at a known frequency. Measurements were accepted as the calibration level from before and after the noise measurement agree to within 1.0 dB.

The sound level meters and acoustic calibrator were calibrated by a HOKLAS accredited laboratory at the frequency of every two years. The relevant calibration certificates are presented in *Annex A*.

Noise measurements were made without the presence of fog and rain, and with steady wind speed and gusts not exceeding  $5\text{ms}^{-1}$  and  $10\text{ms}^{-1}$ , respectively in accordance with international standards and practices <sup>(1)</sup>. Broadband measurement of  $L_{Aeq}$ ,  $L_{10}$ ,  $L_{90}$ ,  $L_{max}$  and  $L_{min}$  has been recorded at 100ms interval.

### 2.3.5 *Compliance Assessment*

#### *Fireworks Displays*

During monitoring, a detailed log of noise event was undertaken to record down any significant extraneous noise activities. The noise measurement was conducted in accordance with the agreed monitoring methodology which was adopted in the monitoring during trial fireworks displays. Any significant influences on the measured noise levels were taken into account in accordance with standard acoustical principles and practices. The corrected noise level, which will be the noise level generated by the Fireworks Show at HKDL, will then be compared against the maximum noise level of  $L_{Aeq, 15\text{ min}}$  55dB(A) at NM1 and NM2\_1 as recommended in the EIA and stated in the Operational EM&A Plan (Revision H). HKITP will adopt  $L_{Aeq, 15\text{ min}}$  55dB(A) as the Limit Level.

#### *Fixed Plant Noise*

As recommended in the EIA and stated in the Operational EM&A Plan (Revision H), HKITP will adopt the maximum fixed plant site perimeter noise level (ie Limit Level) of  $L_{Aeq(30\text{ minute})}$  75 dB(A) at the perimeter of the Resort (NM4). HKITP will follow the Action and Limit (A/L) Levels as recommended in EIA which are summarised in **Table 2.7**.

**Table 2.7** *Action and Limit Levels for Fixed Plant Noise Monitoring*

| Parameter         | Action Level                                                                      | Limit Level                       |
|-------------------|-----------------------------------------------------------------------------------|-----------------------------------|
| Fixed Plant Noise | When one documented complaint is received from any one of the sensitive receivers | $L_{Aeq(30\text{ min})}$ 75 dB(A) |

## 2.4 **WASTE MANAGEMENT**

The potential environmental impacts associated with the handling and disposal of waste arising from the resort operations have been assessed in the EIA. In accordance with the requirement stipulated in Condition 3.21 of the EP-01/059/2000/B (EP), an Operation Waste Management Plan (OWMP) shall be submitted to EPD for approval at least one month before the Project commences operation. The OWMP was prepared by the HKITP and submitted to EPD and obtained approval on 12 August 2005. Subsequently, the OWMP (Revision A) was submitted on 30 March 2012 for EPD's approval under Condition 1.10 of the EP, and was approved on 11 April 2012. The

<sup>(1)</sup> ISO 11819-1:1997 and ISO/FDIS 13472-1:2001

OWMP (Revision A) included waste avoidance measures, material recovery and recycling programme and waste management audit framework. The OWMP (Revision B) included an update of additional refuse collection points (RCPs) in new areas of the theme park and was approved by EPD on 26 April 2013. With the implementation of the OWMP (Revision B), the EIA has concluded that minimal environmental impacts are anticipated for the handling, storage, treatment and disposal of waste arising from the Resort operations.

#### **2.4.1**      *Monitoring and Audit on the Implementation of Mitigation Measures*

It is recommended that auditing of each waste stream should be carried out periodically to determine if wastes are being managed in accordance with the approved OWMP (Revision B). The objectives of the waste management monitoring and audit are:

- to ensure the wastes are handled, collected, stored and transferred and disposed of in compliance with the Waste Disposal Ordinance and the relevant regulations, and
- to ensure the waste management plan, in particular the environmental mitigation measures, is implemented properly and effectively.

The monitoring and audit covered the waste handling, recycling and disposal procedures within the Resort, as well as off-site sorting facility and the composting facility. Records identifying the waste arisings, the nature and composition of materials, the quantities of materials reduced, reused, recycled and otherwise recovered were kept for monitoring to check the effectiveness of waste reduction measures implemented. Summary of the waste monitoring and audit results for this reporting period is given in *Section 3.3*.

### **2.5**      *TERRESTRIAL ECOLOGY*

The EIA summarised that during the operational phase there exists the potential for the White-bellied Sea Eagles to abandon their nesting site due to noise from the laser shows (which will not be undertaken on opening day program) and the fireworks shows. The EIA also stated that “human interference impact identified may be mitigated by the further prohibition of human access during Project operation by secure fencing of the site”. It was also recommended to extend the monitoring programme to monitor the reaction of these birds to the fireworks shows.

It was agreed between HKITP, CEDD and EPD that monitoring of White-bellied Sea Eagle would be conducted by CEDD and the monitoring results will be distributed to HKITP until completion of Government’s works in the Penny’s Bay Development Area. Construction works for Penny’s Bay Reclamation Stage 2 were completed in February 2008. Monthly terrestrial ecological monitoring by CEDD was terminated after February 2008 with the approval from EPD. The need for the monitoring of White-bellied Sea Eagles by HKITP after completion of CEDD’s works was agreed with EPD on 27 June

2008, and the monitoring of White-bellied Sea Eagles will be conducted for a 2-year period when the Theme Park Phase II fireworks displays are launched.

## 2.6

### *MARINE ECOLOGY*

The EIA concluded that operational impacts to marine ecological resources may occur through disturbances to water quality due to changes in the hydrodynamic regime (note however that the water quality assessment in the EIA predicted “no adverse impacts”). It was also predicted in the EIA that there will be an increase in the number of vessels travelling between Victoria Harbour and Penny’s Bay. The EIA concluded that these vessels will not be travelling at high speed and as the area is not identified as critical habitat to the Indo-Pacific Humpback Dolphin, unacceptable impacts are not predicted with the implementation of mitigation measures.

The EIA proposed a construction/operation dolphin/porpoise monitoring programme be established to evaluate whether the works had any effect on the mammals. It has been agreed between HKITP, CEDD and EPD that monitoring of dolphin/porpoise will be conducted by CEDD and the monitoring results will be distributed to HKITP until completion of Government’s works in the Penny’s Bay Development Area. Dredging activities for Penny’s Bay Reclamation Stage 2 was completed in December 2005. Filling of sand and sorted public fill was also completed on 30 July 2007 and 13 June 2007 respectively. Monthly marine ecological monitoring by CEDD was terminated after December 2007 with the approval from EPD. The need for continued monitoring of marine mammals by HKITP after the completion of CEDD’s works was agreed with EPD on 27 June 2008, and further monitoring of marine ecology (dolphin/porpoise) would be continued for one year starting from the 35<sup>th</sup> reporting period to the 46<sup>th</sup> reporting period (inclusive). HKITP has proposed, in consultation with AFCD, to terminate the monitoring of marine mammals after July 2009. The proposal was submitted on 6 August 2009 for EPD’s approval. The Operational EM&A Plan (Revision F) was submitted on 27 October 2009 to EPD for approval, and was approved on 9 November 2009.

### 3.1 AIR QUALITY

The 24-hour RSP monitoring was conducted on 25 April 2016. The air quality monitoring result is summarised in *Table 3.1*. Detailed laboratory test result is presented in *Annex C* and the trend of monitoring results is plotted in *Annex D*. The weather information is presented in *Annex B*.

**Table 3.1 Air Quality Monitoring Result**

| Sampling Date                                                          | 24-hr Averaged RSP Level ( $\mu\text{gm}^{-3}$ ) at AM1 (Rooftop of Crestmont Villa Management Office) <sup>(a)</sup> | Action Level ( $\mu\text{gm}^{-3}$ ) | Limit Level ( $\mu\text{gm}^{-3}$ ) |
|------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|--------------------------------------|-------------------------------------|
| 25 April 2016                                                          | 10.9                                                                                                                  | 106                                  | 180                                 |
| Compliance :                                                           |                                                                                                                       | ✓                                    | ✓                                   |
| <b>Note:</b>                                                           |                                                                                                                       |                                      |                                     |
| (a) Refer to background information provided in <i>Section 2.1.1</i> . |                                                                                                                       |                                      |                                     |

No exceedance was identified from the measured 24-hour RSP level at the monitoring station. The dominant wind direction was from the south between 20:00 and 21:00 hours (i.e. during the firework displays) on 25 April 2016. It is considered that the measured RSP levels were most likely reflecting the contributions from the general background RSP level only.

### 3.2 FIREWORKS NOISE AND FIXED PLANT NOISE

In accordance with the sampling schedule for noise monitoring as presented in *Table 2.5*, one round of fireworks noise monitoring and fixed plant noise monitoring was conducted during this reporting period. The fireworks and fixed plant noise levels at the monitoring locations are given in *Tables 3.2* and *3.3* and graphically presented in *Annexes E* and *F* respectively.

No exceedance of the Action or Limit Level of fireworks noise and fixed plant noise was recorded at the monitoring stations during this reporting period.

**Table 3.2 Fireworks Noise Monitoring Results**

| Location                                                                                                                                                                              | Date       | Time Period, hrs    | L <sub>Aeq 15mins</sub> dB(A) - ambient before | L <sub>Aeq 15mins</sub> dB(A) - ambient after | L <sub>Aeq 15mins</sub> dB(A) - average ambient | L <sub>Aeq 15mins</sub> dB(A) - Measured noise level | L <sub>Aeq 15mins</sub> Corrected noise levels |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------------------|------------------------------------------------|-----------------------------------------------|-------------------------------------------------|------------------------------------------------------|------------------------------------------------|
| NM1 - Cherish Court, Discovery Bay                                                                                                                                                    | 4 May 2016 | 20:15:00 – 21:00:00 | 52.9                                           | 52.8                                          | 52.8                                            | 54.5                                                 | 49.6                                           |
| NM2_1 - Sea Crest Villa Block D, Peng Chau                                                                                                                                            | 4 May 2016 | 20:15:00 – 21:00:00 | 50.7                                           | 46.3                                          | 49.0                                            | 48.0                                                 | - <sup>(a)</sup>                               |
| <b>Note:</b>                                                                                                                                                                          |            |                     |                                                |                                               |                                                 |                                                      |                                                |
| (a) Noise level during fireworks displays (L <sub>Aeq 15mins</sub> – measured noise level) is lower than averaged background noise level (L <sub>Aeq 15mins</sub> – average ambient). |            |                     |                                                |                                               |                                                 |                                                      |                                                |

**Table 3.3**      **Fixed Plant Noise Monitoring Results**

| Location                                    | Date       | Time Period, hrs    | Measured Noise Levels, dB(A) |                  |                  |                 |                 |
|---------------------------------------------|------------|---------------------|------------------------------|------------------|------------------|-----------------|-----------------|
|                                             |            |                     | L <sub>Aeq</sub>             | L <sub>min</sub> | L <sub>max</sub> | L <sub>90</sub> | L <sub>10</sub> |
| NM4 -<br>Central<br>Maintenance<br>Building | 6 May 2016 | 10:50:00 – 11:20:00 | 66.8                         | 55.1             | 82.8             | 61.3            | 70.2            |

### 3.3

#### WASTE MONITORING

HKITP has followed the approved Operational Waste Management Plan (OWMP) (Revision B) on procedures for handling of municipal solid waste, chemical waste, grease trap waste, food waste, green waste and fireworks waste.

Reference has been made to the waste flow tables prepared by waste collectors and the quantities of different wastes collected, disposed of or recycled are summarised in *Table 3.4*.

Apart from the above quantities of waste recycled, HKITP has implemented various waste minimisation measures from the start of operation, which prevented waste generation at source. These contributed to the overall amount of waste “diverted” from landfill disposal. These measures include use of reusable utensils, tableware & trays instead of disposables in some of the fast-food outlets; use of fast-action hand dryers in lieu of paper towels in most public wash room facilities; use of reusable delivery cages, totes and wagons as opposed to wooden pallets and paper cardboard box for distribution of merchandise and food materials from the central distribution center to various outlets within the Theme Park; use of rechargeable batteries rather than disposable ones wherever possible; and recycle used rechargeable batteries; etc.

**Table 3.4**      *Quantities of Different Types of Waste*

| Month / Year             | Quantity, tonnes / kg                |                                     |                                                             |             |                               |                               |        |
|--------------------------|--------------------------------------|-------------------------------------|-------------------------------------------------------------|-------------|-------------------------------|-------------------------------|--------|
|                          | Municipal Solid Waste <sup>(a)</sup> | Recyclable Materials <sup>(b)</sup> | Food and green waste collected for recycling <sup>(c)</sup> |             | Wastes Avoided <sup>(d)</sup> | Chemical Waste <sup>(e)</sup> |        |
|                          |                                      |                                     | Food Waste                                                  | Green Waste |                               | Solid                         | Liquid |
| 11 Apr 2016 – 8 May 2016 | 415.11 tonnes                        | 50.39 tonnes                        | 20.77 tonnes                                                | 5.83 tonnes | 9.0 tonnes                    | 100 kg                        | 1060 L |

**Notes:**

- (a) Waste disposal reports dated between 11 April 2016 and 8 May 2016 were provided by HKITP's waste management vendor on weekly basis.
- (b) Recyclable materials (paper, cardboard, plastics, metals, used kitchen oil, toner cartridges, electronic wastes and glass beverage bottles) were collected by third party recyclers. Additionally, 154 kg of hotel amenities (shower gel, shampoo), 71.5 kg of raincoats, 58 kg of costumes and 190 kg of miscellaneous items were donated during the reporting period.
- (c) 20.1 tonnes of food waste was collected by recycler between 11 April 2016 and 8 May 2016 and 669 kg of surplus food was donated during the reporting period. 5.83 tonnes of green waste was collected for recycling during the reporting period.
- (d) The quantity of wastes avoided in this reporting period is estimated based on a few selected representative measures being implemented which include: the use of reusable containers instead of disposables in the fast food outlets; minimisation of packaging provided for the merchandise items; and the provision of electric hand dryers instead of paper towels in washrooms in the theme park.
- (e) A registered chemical waste collector has been engaged for the collection of chemical wastes for disposal or recycling at licensed facilities.

### 3.4 *TERRESTRIAL ECOLOGY*

The need for the monitoring of White-bellied Sea Eagles by HKITP after completion of CEDD's works has been agreed with EPD on 27 June 2008, and the monitoring of White-bellied Sea Eagles will be conducted for a 2-year period when the Theme Park Phase II fireworks displays are launched.

### 3.5 *MARINE ECOLOGY*

The need for continued monitoring of marine mammals by HKITP after the completion of CEDD's works was agreed with EPD on 27 June 2008, and the monitoring of dolphin/porpoise would be continued twice per month for one year starting from the 35<sup>th</sup> reporting period to the 46<sup>th</sup> reporting period (inclusive) following the monitoring methodology adopted by CEDD. HKITP has proposed, in consultation with AFCD, to terminate the monitoring of marine mammals after July 2009. The proposal was submitted on 6 August 2009 for EPD's approval. The Operational EM&A Plan (Revision F) was submitted on 27 October 2009 to EPD for approval, and was approved on 9 November 2009.

No marine mammal monitoring was conducted during the reporting month.

Based on the Operational EM&A Plan (Revision H), site inspection is to be carried out by the ET once per reporting period. A joint environmental site inspection was, therefore, carried out by the representatives of the HKITP and ET on 6 May 2016.

The major activities undertaken in the Theme Park are the operation of theme park attractions, rides, fireworks displays, ancillary restaurants, retail shops and servicing facilities. Office work and regular maintenance of machinery within the Theme Park is also undertaken in the Back-of-House Area.

The environmental performance for the different environmental issues (including air, water, noise, ecology and waste/chemical waste management) complied with environmental requirements and all necessary mitigation measures were properly implemented. The HKITP has implemented environmental mitigation measures and requirements as stated in the EIA Report, the Environmental Permit and Operational EM&A Plan (Revision H). The implementation status of recommended mitigation measures under the EP during this reporting period is summarised in *Annex G*.

The Outdoor Vending, the restaurant of Corner Café and its associated RCP and green waste recycling were audited and no environmental concern was identified during the site inspection in the reporting period.

No non-compliance in relation to the EIA recommendations was identified during the site inspection in this reporting period and therefore no further actions are required. The ET will keep track of the EM&A programme to check compliance with environmental requirements and the proper implementation of all necessary mitigation measures.

#### 4.1

#### *FUTURE KEY ISSUES*

Entertainment facilities and associated services within the Hong Kong Disneyland Resort to be provided in the coming monitoring period will be the same as that provided in this reporting period. No potential environmental impacts are anticipated in the next monitoring period.

## **5 ENVIRONMENTAL NON-CONFORMANCE**

### **5.1 SUMMARY OF MONITORING EXCEEDANCE**

No monitoring exceedance was recorded in this reporting period.

### **5.2 SUMMARY OF ENVIRONMENTAL COMPLAINT**

No environmental complaint was received in this reporting period.

### **5.3 SUMMARY OF ENVIRONMENTAL SUMMONS AND SUCCESSFUL PROSECUTION**

No summons was received in this reporting period.

This Environmental Monitoring and Audit (EM&A) Report presents the EM&A work undertaken during the period from 12 April 2016 to 11 May 2016 in accordance with Operational EM&A Plan (Revision H) and the requirement under Environmental Permit EP-01/059/2000/C.

Monitoring of air quality, firework noise and fixed plant noise was carried out at designated monitoring stations during this reporting period and there were no monitoring exceedances recorded in this reporting period.

Waste management procedures recommended in the approved Operational Waste Management Plan (OWMP) (Revision B) were implemented.

The environmental performance for the different environmental issues (including air, water, noise, ecology and waste/chemical waste management) complied with environmental requirements and all necessary mitigation measures were properly implemented. No non-compliance in relation to the EIA recommendations was identified during the site inspection in this reporting period. No complaint or summons was received during this reporting period.

Annex A

## Calibration Certificates for HVS and Sound Level Meters



# Calibration Certificate

Certificate No. 500223

Page 1 of 2 Pages

**Customer :** Environmental Resources Management

**Address :** 16/F DCH Commercial Centre 25 Westlands Road Quarry Bay Hong Kong

**Order No. :** Q44043

**Date of receipt :** 9-Jan-15

## Item Tested

**Description :** Sound Level Calibrator

**Manufacturer :** 01dB-Stell

**Model :** CAL21

**Serial No. :** 34113607(2011)

## Test Conditions

**Date of Test :** 15-Jan-15

**Supply Voltage :** --

**Ambient Temperature :**  $(23 \pm 3)^{\circ}\text{C}$

**Relative Humidity :**  $(50 \pm 25) \%$

## Test Specifications

Calibration check.

Calibration procedure : Z02, IEC942.

## Test Results

All results were within the IEC 942 Class 2 specification.


The results are shown in the attached page(s).

Main Test equipment used:

| <u>Equipment No.</u> | <u>Description</u>          | <u>Cert. No.</u> | <u>Traceable to</u> |
|----------------------|-----------------------------|------------------|---------------------|
| S205                 | Ref. Sound Level Calibrator | PHCO40002        | SCL-HKSAR           |
| S041                 | Universal Counter           | 405317           | SCL-HKSAR           |
| S206                 | Sound Level Meter           | 405322           | SCL-HKSAR           |

The values given in this Calibration Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environmental changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Hong Kong Calibration Ltd. shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration are traceable to International System of Units (SI).  
The test results apply to the above Unit-Under-Test only

**Calibrated by :**   
Dorothy Cheuk

**Approved by :**   
Steve Kwan

**Date:** 15-Jan-15

This Certificate is issued by:

Hong Kong Calibration Ltd.

Unit 8B, 24/F., Well Fung Industrial Centre, No. 58-76, Ta Chuen Ping Street, Kwai Chung, NT, Hong Kong.

Tel: 2425 8801 Fax: 2425 8646



# Calibration Certificate

Certificate No. **500223**

Page 2 of 2 Pages

Results :

**1. Level Accuracy (at 1 kHz)**

| UUT Setting (dB) | Measured Value (dB) | IEC 942 Class 2 Spec. |
|------------------|---------------------|-----------------------|
| 94               | 94.1                | $\pm 0.5$ dB          |

Uncertainty :  $\pm 0.1$  dB

**2. Frequency Accuracy**

| UUT Nominal Value | Measured Value | IEC 942 Class 2 Spec. |
|-------------------|----------------|-----------------------|
| 1.000 kHz         | 1.003 kHz      | $\pm 4$ %             |

Uncertainty :  $\pm 0.1$  %

**3. Level Stability : 0.0 dB**

IEC 942 Class 2 Spec. :  $\pm 0.2$  dB

Uncertainty :  $\pm 0.01$  dB

**4. Total Harmonic Distortion :  $< 1.6$  %**

IEC 942 Class 2 Spec. :  $< 3$  %

Uncertainty :  $\pm 2.3$  % of rdg.

Remark : 1. UUT : Unit-Under-Test

2. The uncertainty claimed is for a confidence probability of not less than 95%.

3. Atmospheric Pressure : 1 016 hPa.

----- END -----



# Calibration Certificate

Certificate No. **506407**

Page 1 of 2 Pages

**Customer :** Environmental Resources Management

**Address :** 16/F DCH Commercial Centre 25 Westlands Road Quarry Bay Hong Kong

**Order No. :** Q52359

**Date of receipt :** 27-Jul-15

## Item Tested

**Description :** Sound Level Calibrator

**Manufacturer :** 01dB-Stell

**Model :** CAL21

**Serial No. :** 34113609(2011)

## Test Conditions

**Date of Test :** 7-Aug-15

**Supply Voltage :** --

**Ambient Temperature :**  $(23 \pm 3)^{\circ}\text{C}$

**Relative Humidity :**  $(50 \pm 25) \%$

## Test Specifications

Calibration check.

Calibration procedure : Z02, IEC 942.

## Test Results

All results were within the IEC 942 Class 2 specification.

The results are shown in the attached page(s).

Main Test equipment used:


| <u>Equipment No.</u> | <u>Description</u>     | <u>Cert. No.</u> | <u>Traceable to</u> |
|----------------------|------------------------|------------------|---------------------|
| S240                 | Sound Level Calibrator | 500563           | NIM-PRC & SCL-HKSAR |
| S041                 | Universal Counter      | 405317           | SCL-HKSAR           |
| S206                 | Sound Level Meter      | 405322           | SCL-HKSAR           |

The values given in this Calibration Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environmental changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Hong Kong Calibration Ltd. shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration are traceable to International System of Units (SI).

The test results apply to the above Unit-Under-Test only

**Calibrated by :**   
Dorothy Cheuk

**Approved by :**   
Steve Kwan

This Certificate is issued by:  
Hong Kong Calibration Ltd.  
Unit 8B, 24/F, Well Fung Industrial Centre, No. 58-76, Ta Chuen Ping Street, Kwai Chung, NT Hong Kong  
Tel: 2425 8801 Fax: 2425 8646

**Date:** 7-Aug-15



# Calibration Certificate

Certificate No.

Page 2 of 2 Pages

Results :

## 1. Level Accuracy (at 1 kHz)

| UUT Nominal Value (dB) | Measured Value (dB) | IEC 942 Class 2 Spec. |
|------------------------|---------------------|-----------------------|
| 94                     | 93.9                | $\pm 0.5$ dB          |

Uncertainty :  $\pm 0.1$  dB

## 2. Frequency Accuracy

| UUT Nominal Value | Measured Value | IEC 942 Class 2 Spec. |
|-------------------|----------------|-----------------------|
| 1 kHz             | 1.002 9 kHz    | $\pm 4$ %             |

Uncertainty :  $\pm 0.1$  %

## 3. Level Stability : 0.0 dB

IEC 942 Class 2 Spec. :  $\pm 0.2$  dB

Uncertainty :  $\pm 0.01$  dB

## 4. Total Harmonic Distortion : $< 1.6$ %

IEC 942 Class 2 Spec. :  $< 3$  %

Uncertainty :  $\pm 2.3$  % of rdg.

Remark : 1. UUT : Unit-Under-Test

2. The uncertainty claimed is for a confidence probability of not less than 95%.

3. Atmospheric Pressure : 990 hPa.

----- END -----



# Calibration Certificate

Certificate No. **500224**

Page 1 of 4 Pages

**Customer :** Environmental Resources Management

**Address :** 16/F DCH Commercial Centre 25 Westlands Road Quarry Bay Hong Kong

**Order No. :** Q44043

**Date of receipt :** 9-Jan-15

## Item Tested

**Description :** Sound Level Meter

**Manufacturer :** 01dB-Stell

**Model :** Solo

**Serial No. :** 65226

## Test Conditions

**Date of Test :** 15-Jan-15

**Supply Voltage :** --

**Ambient Temperature :**  $(23 \pm 3)^{\circ}\text{C}$

**Relative Humidity :**  $(50 \pm 25) \%$

## Test Specifications

Calibration check.

Calibration procedure : Z01, IEC 651, IEC804, IEC 1260.

## Test Results

All results were within the IEC 651 Type 1, IEC 804 Type 1 & IEC 1260 Class 1 specification.

The results are shown in the attached page(s).


Main Test equipment used:

| <u>Equipment No.</u> | <u>Description</u>          | <u>Cert. No.</u> | <u>Traceable to</u> |
|----------------------|-----------------------------|------------------|---------------------|
| S017                 | Multi-Function Generator    | C147450          | SCL-HKSAR           |
| S205                 | Ref. Sound Level Calibrator | PHCO40002        | SCL-HKSAR           |

The values given in this Calibration Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environmental changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Hong Kong Calibration Ltd. shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration are traceable to International System of Units (SI).

The test results apply to the above Unit-Under-Test only

**Calibrated by :**   
Dorothy Cheuk

**Approved by :**   
Steve Kwan

**Date:** 15-Jan-15

This Certificate is issued by:  
Hong Kong Calibration Ltd.  
Unit 8B, 24/F., Well Fung Industrial Centre, No. 58-76, Ta Chuen Ping Street, Kwai Chung, NT, Hong Kong.  
Tel: 2425 8801 Fax: 2425 8646

The copyright of this certificate is owned by Hong Kong Calibration Ltd.. It may not be reproduced except in full.

E



# Calibration Certificate

Certificate No. **500224**

Page 2 of 4 Pages

Results :

## 1. Accuracy Check

| UUT Setting |          |                | Applied Value (dB) | UUT Reading (dB) |
|-------------|----------|----------------|--------------------|------------------|
| Range (dB)  | Response | Weighting      |                    |                  |
| 20 - 140    | Fast     | L <sub>A</sub> | 94.1               | 93.8             |
|             | Slow     |                |                    | 93.8             |
|             | Fast     | L <sub>C</sub> |                    | 93.8             |
|             | Slow     |                |                    | 93.8             |
|             | Fast     | L <sub>A</sub> | 114.1              | 113.8            |
|             | Slow     |                |                    | 113.8            |
|             | Fast     | L <sub>C</sub> |                    | 113.8            |
|             | Slow     |                |                    | 113.8            |

IEC 651 Type 1 Spec. :  $\pm 0.7$  dB

Uncertainty :  $\pm 0.1$  dB

## 2. Level Stability : 0.0 dB

IEC 651 Type 1 Spec. :  $\pm 0.3$  dB

Uncertainty :  $\pm 0.01$  dB

## 3. Linearity

### 3.1 Differential level linearity

| UUT Range | Applied Value (dB) | UUT Reading (dB) | Variation (dB) | IEC 651 Type 1 Spec. |
|-----------|--------------------|------------------|----------------|----------------------|
| 140       | 84.0               | 84.0             | 0.0            | $\pm 0.4$ dB         |
|           | 94.0               | 94.0 (Ref.)      | - -            |                      |
|           | 95.0               | 95.0             | 0.0            | $\pm 0.2$ dB         |

Uncertainty :  $\pm 0.1$  dB



# Calibration Certificate

Certificate No. 500224

Page 3 of 4 Pages

## 3. Frequency Weighting

A weighting

| Frequency | Attenuation (dB) | IEC 651 Type 1 Spec.            |
|-----------|------------------|---------------------------------|
| 31.5 Hz   | -39.4            | - 39.4 dB, $\pm 1.5$ dB         |
| 63 Hz     | -26.1            | - 26.2 dB, $\pm 1.5$ dB         |
| 125 Hz    | -16.1            | - 16.1 dB, $\pm 1$ dB           |
| 250 Hz    | -8.6             | - 8.6 dB, $\pm 1$ dB            |
| 500 Hz    | -3.2             | - 3.2 dB, $\pm 1$ dB            |
| 1 kHz     | 0.0 (Ref.)       | 0 dB, $\pm 1$ dB                |
| 2 kHz     | +1.2             | + 1.2 dB, $\pm 1$ dB            |
| 5 kHz     | +0.4             | + 1.0 dB, $\pm 1$ dB            |
| 8 kHz     | -1.7             | - 1.1 dB, + 1.5 dB $\sim -3$ dB |
| 16 kHz    | -12.0            | - 6.6 dB, + 3 dB $\sim \infty$  |

Uncertainty :  $\pm 0.1$  dB

## 4. Time Averaging

| Applied Burst duty Factor | Applied Leq Value (dB) | UUT Reading (dB) | IEC 804 Type 1 Spec. |
|---------------------------|------------------------|------------------|----------------------|
| continuous                | 40.0                   | 40.0             | --                   |
| 1/10                      | 40.0                   | 40.0             | $\pm 0.5$ dB         |
| 1/10 <sup>2</sup>         | 40.0                   | 40.0             |                      |
| 1/10 <sup>3</sup>         | 40.0                   | 40.0             |                      |
| 1/10 <sup>4</sup>         | 40.0                   | 40.0             |                      |

Uncertainty :  $\pm 0.1$  dB

## 6. Filter Characteristics

### 6.1 1/1 – Octave Filter

| Frequency   | Attenuation (dB) | IEC 1260 Class 1 (dB) |
|-------------|------------------|-----------------------|
| 125 Hz      | -74.5            | < - 61                |
| 250 Hz      | -55.0            | < - 42                |
| 500 Hz      | -24.4            | < - 17.5              |
| 707 Hz      | -3.0             | - 2 $\sim$ - 5        |
| 1 kHz (Ref) | --               | --                    |
| 1.414 kHz   | -2.8             | - 2 $\sim$ - 5        |
| 2 kHz       | -48.3            | < - 17.5              |
| 4 kHz       | -87.6            | < - 42                |
| 8 kHz       | -89.0            | < - 61                |

Uncertainty :  $\pm 0.25$  dB



## Calibration Certificate

Certificate No. **500224**

Page 4 of 4 Pages

### 6.2 1/3 – Octave Filter

| Frequency   | Attenuation (dB) | IEC 1260 Class 1 (dB) |
|-------------|------------------|-----------------------|
| 326 Hz      | -70.0            | < - 61                |
| 530 Hz      | -57.9            | < - 42                |
| 772 Hz      | -28.5            | < - 17.5              |
| 891 Hz      | -3.5             | + 0.3 ~ - 5.0         |
| 1 kHz (Ref) | --               | --                    |
| 1.122 kHz   | -3.8             | + 0.3 ~ - 5.0         |
| 1.296 kHz   | -31.5            | < - 17.5              |
| 1.887 kHz   | -65.9            | < - 42                |
| 3.070 kHz   | -90.0            | < - 61                |

Uncertainty :  $\pm 0.25$  dB

Remarks : 1. UUT : Unit-Under-Test

2. The uncertainty claimed is for a confidence probability of not less than 95%.

3. Atmospheric Pressure : 1 016 hPa.

----- END -----



# Calibration Certificate

Certificate No. **506406**

Page 1 of 4 Pages

**Customer :** Environmental Resources Management

**Address :** 16/F DCH Commercial Centre 25 Westlands Road Quarry Bay Hong Kong

**Order No. :** Q52359

**Date of receipt :** 27-Jul-15

## Item Tested

**Description :** Sound Level Meter

**Manufacturer :** 01dB-Stell

**Model :** Solo

**Serial No. :** 65225

## Test Conditions

**Date of Test :** 7-Aug-15

**Supply Voltage :** --

**Ambient Temperature :**  $(23 \pm 3)^{\circ}\text{C}$

**Relative Humidity :**  $(50 \pm 25) \%$

## Test Specifications

Calibration check.

Ref. Document/Procedure: Z01, IEC 651, IEC 804, IEC 1260.

## Test Results

All results were within the IEC 651 Type 1 & IEC 804 Type 1 & IEC 1260 Class 1 specification.

The results are shown in the attached page(s).

Main Test equipment used:


| <u>Equipment No.</u> | <u>Description</u>       | <u>Cert. No.</u> | <u>Traceable to</u> |
|----------------------|--------------------------|------------------|---------------------|
| S017                 | Multi-Function Generator | C147450          | SCL-HKSAR           |
| S240                 | Sound Level Calibrator   | 500563           | NIM-PRC & SCL-HKSAR |

The values given in this Calibration Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environmental changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Hong Kong Calibration Ltd. shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration are traceable to International System of Units (SI).

The test results apply to the above Unit-Under-Test only

**Calibrated by :**   
Dorothy Cheuk

**Approved by :**   
Steve Kwan

This Certificate is issued by:  
Hong Kong Calibration Ltd.  
Unit 8B, 24/F, Well Fung Industrial Centre, No. 58-76, Ta Chuen Ping Street, Kwai Chung, NT, Hong Kong  
Tel: 2425 8801 Fax: 2425 8646

**Date:** 7-Aug-15



# Calibration Certificate

Certificate No. **506406**

Page 2 of 4 Pages

Results :

## 1. Accuracy Check

| UUT Setting |          |                | Applied Value (dB) | UUT Reading (dB) |
|-------------|----------|----------------|--------------------|------------------|
| Range (dB)  | Response | Weighting      |                    |                  |
| 20 - 140    | Fast     | L <sub>A</sub> | 94.0               | 94.0             |
|             | Slow     |                |                    | 94.0             |
|             | Fast     | L <sub>C</sub> |                    | 94.0             |
|             | Slow     |                |                    | 94.0             |
|             | Fast     | L <sub>A</sub> | 114.0              | 114.1            |
|             | Slow     |                |                    | 114.1            |
|             | Fast     | L <sub>C</sub> |                    | 114.0            |
|             | Slow     |                |                    | 114.0            |

IEC 651 Type 1 Spec. :  $\pm 0.7$  dB

Uncertainty :  $\pm 0.1$  dB

## 2. Level Stability : 0.0 dB

IEC 651 Type 1 Spec. :  $\pm 0.3$  dB

Uncertainty :  $\pm 0.01$  dB

## 3. Linearity

### 3.1 Level Linearity

| UUT Range | Applied Value (dB) | UUT Reading (dB) | Variation (dB) | IEC 651 Type 1 Spec. (Primary Indicator Range) |
|-----------|--------------------|------------------|----------------|------------------------------------------------|
| 140       | 114.0              | 114.0            | 0.0            | $\pm 0.7$ dB                                   |
| 130       | 104.0              | 104.0            | 0.0            |                                                |
| 120       | 94.0               | (Ref.)           | - -            |                                                |
| 110       | 84.0               | 84.0             | 0.0            |                                                |
| 100       | 74.0               | 74.0             | 0.0            |                                                |
| 90        | 64.0               | 64.0             | 0.0            |                                                |
| 80        | 54.0               | 54.0             | 0.0            |                                                |

Uncertainty :  $\pm 0.1$  dB



# Calibration Certificate

Certificate No. 506406

Page 3 of 4 Pages

## 3.2 Differential level linearity

| UUT Range | Applied Value (dB) | UUT Reading (dB) | Variation (dB) | IEC 651 Type 1 Spec. |
|-----------|--------------------|------------------|----------------|----------------------|
| 140       | 84.0               | 84.0             | 0.0            | $\pm 0.4$ dB         |
|           | 94.0               | 94.0 (Ref.)      | - -            |                      |
|           | 95.0               | 95.0             | 0.0            | $\pm 0.2$ dB         |

Uncertainty :  $\pm 0.1$  dB

## 4. Frequency Weighting

A weighting

| Frequency | Attenuation (dB) | IEC 651 Type 1 Spec.          |
|-----------|------------------|-------------------------------|
| 31.5 Hz   | -39.1            | - 39.4 dB, $\pm 1.5$ dB       |
| 63 Hz     | -26.0            | - 26.2 dB, $\pm 1.5$ dB       |
| 125 Hz    | -15.9            | - 16.1 dB, $\pm 1$ dB         |
| 250 Hz    | -8.5             | - 8.6 dB, $\pm 1$ dB          |
| 500 Hz    | -3.1             | - 3.2 dB, $\pm 1$ dB          |
| 1 kHz     | 0.0 (Ref.)       | 0 dB, $\pm 1$ dB              |
| 2 kHz     | +1.2             | + 1.2 dB, $\pm 1$ dB          |
| 4 kHz     | +0.9             | + 1.0 dB, $\pm 1$ dB          |
| 8 kHz     | -1.7             | - 1.1 dB, + 1.5 dB ~ - 3 dB   |
| 16 kHz    | -12.1            | - 6.6 dB, + 3 dB ~ - $\infty$ |

Uncertainty :  $\pm 0.1$  dB

## 5. Time Averaging

| Applied Burst duty Factor | Applied Leq Value (dB) | UUT Reading (dB) | IEC 804 Type 1 Spec. |
|---------------------------|------------------------|------------------|----------------------|
| continuous                | 40.0                   | 40.0             | --                   |
| 1/10                      | 40.0                   | 40.0             | $\pm 0.5$ dB         |
| 1/10 <sup>2</sup>         | 40.0                   | 40.0             |                      |
| 1/10 <sup>3</sup>         | 40.0                   | 40.0             | $\pm 1.0$ dB         |
| 1/10 <sup>4</sup>         | 40.0                   | 39.9             |                      |

Uncertainty :  $\pm 0.1$  dB



# Calibration Certificate

Certificate No. 506406

Page 3 of 4 Pages

## 6. Filter Characteristics

### 6.1 1/1 – Octave Filter

| Frequency   | Attenuation (dB) | IEC 1260 Class 1 (dB) |
|-------------|------------------|-----------------------|
| 125 Hz      | -74.6            | < - 61                |
| 250 Hz      | -55.0            | < - 42                |
| 500 Hz      | -24.4            | < - 17.5              |
| 707 Hz      | -3.0             | - 2 ~ - 5             |
| 1 kHz (Ref) | --               | --                    |
| 1.414 kHz   | -2.8             | - 2 ~ - 5             |
| 2 kHz       | -48.3            | < - 17.5              |
| 4 kHz       | -88.0            | < - 42                |
| 8 kHz       | -89.0            | < - 61                |

Uncertainty :  $\pm 0.25$  dB

Remarks : 1. UUT : Unit-Under-Test

2. The uncertainty claimed is for a confidence probability of not less than 95%.

3. Atmospheric Pressure : 990 hPa.

4. The UUT was adjusted with the supplied sound calibrator at the reference sound pressure level before the calibration.

----- END -----



ALS Technichem (HK) Pty Ltd  
11/F, Chung Shun Knitting Centre  
1-3 Wing Yip Street  
Kwai Chung, N.T., Hong Kong  
T: +852 2610 1044  
F: +852 2610 2021  
www.alsglobal.com

## **REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION**

**CONTACT:** MR CHRIS HOI  
**CLIENT:** ERM HONG KONG  
**ADDRESS:** 16/F, BERKSHIRE HOUSE,  
25 WESTLANDS ROAD,  
QUARRY BAY,  
HONG KONG  
**PROJECT:** QUARTERLY RSP MONITORING FOR DISNEY FIREWORK

**WORK ORDER:** HK1618300  
**SUB-BATCH:** 0  
**LABORATORY:** HONG KONG  
**DATE RECEIVED:** 25/04/2016  
**DATE OF ISSUE:** 06/05/2016

### **COMMENTS**

It is certified that the item under calibration/checking has been calibrated/checked by corresponding calibrated equipment in the laboratory.

Maximum Tolerance and calibration frequency stated in the report, unless otherwise stated, the internal acceptance criteria of ALS will be followed.

Scope of Test: Flow Rate  
Description: High Volume Sampler  
Brand Name: TISCH  
Model No.: --  
Serial No.: --  
Equipment No.: HK649  
Date of Calibration: 25 April, 2016

### **NOTES**

This is the Final Report and supersedes any preliminary report with this batch number.

Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release.

  
Mr. Fung Lim Chee, Richard  
General Manager -  
Greater China & Hong Kong



## Calibration Report for High Volume Sampler (RSP Sampler)

Report No. : HK1618300  
 Location : DISCOVERY BAY

Equipment No. : HK649  
 Calibration date : 25/04/2016  
 Calibration Due date : 25/07/2016

### CALIBRATION OF CONTINUOUS FLOW RECORDER

| Ambient Condition                      |                  |                                                             |                 |                  |          |
|----------------------------------------|------------------|-------------------------------------------------------------|-----------------|------------------|----------|
| Ambient                                |                  |                                                             | Seasonal        |                  |          |
| Temperature, Ta                        | 297.0            | K                                                           | Temperature, Ts | 300.5            | K        |
| Pressure, Pa                           | 996.0            | hPa                                                         | Pressure, Ps    | 1008.6           | hPa      |
| Orifice Transfer Standards Information |                  |                                                             |                 |                  |          |
| Equipment No.                          | TE-5025A (#1612) | Slope, $m_c$                                                | 1.25494         | Intercept, $b_c$ | -0.01933 |
| Last Calibration Date                  | 14-March-2016    | $Q_a = [ \sqrt{ (\Delta H \cdot T_a / P_a) - b_c } ] / m_c$ |                 |                  |          |
| Next Calibration Date                  | 14-March-2017    |                                                             |                 |                  |          |

| Calibration of RSP   |                    |        |        |                       |                |                             |
|----------------------|--------------------|--------|--------|-----------------------|----------------|-----------------------------|
| Calibration<br>Point | Manometer Reading  |        |        | Q <sub>std</sub>      | Continuous     | W[(Ta+30/Pa) <sup>1/2</sup> |
|                      | H(inches of water) |        |        | (m <sup>3</sup> /min) | Flow Recorder, |                             |
|                      | (up)               | (down) | ( ΔH ) | X-axis                | W (CFM)        | Y-axis                      |
| 1                    | 6.0                | 5.3    | 11.3   | 1.4781                | 51             | 29.2223                     |
| 2                    | 4.6                | 4.6    | 9.2    | 1.3352                | 45             | 25.7844                     |
| 3                    | 3.6                | 3.6    | 7.2    | 1.1830                | 40             | 22.9195                     |
| 4                    | 2.2                | 2.2    | 4.4    | 0.9282                | 32             | 18.3356                     |
| 5                    | 1.3                | 1.4    | 2.7    | 0.7304                | 22             | 12.6057                     |

By Linear Regression of Y Vs X

Correlation coefficient, R = 0.9961  
 Slope, m = 21.3739  
 Intercept, b = -2.4001  
 Calibration result :

\*If the correlation coefficient, R is < 0.9900. Checking and recalibration are required.

Remarks :

Calibration by : Sam Wong  
 Signature : Sam Wong  
 Date : 25/04/2016

Checked by : Iris Lin  
 Signature : Iris Lin  
 Date : 25/04/2016

Annex B

## Weather Information

## Annex B

### Weather Information

| Date                                                                                                                                            | Time Period     | Temp (°C) | Relative Humidity (%) | Dominant Wind Direction | Average Wind Speed (m/s) |
|-------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----------|-----------------------|-------------------------|--------------------------|
| 25/4/16                                                                                                                                         | 2000 – 2100 hrs | 25        | 100                   | S                       | 2.5                      |
| Note:<br>(a) Reference to weather data measured at HKO Peng Chau and King's Park Weather Station.<br>Data obtained from HKO Information Centre. |                 |           |                       |                         |                          |

Annex C

## Detailed Laboratory Analysis Results

## Annex C

**Project** Air quality monitoring for HKITP  
**Test** Respirable suspended particulates  
**Location** AM1 - Rooftop of Crestmont Villa Management Office, Discovery Bay

| Date of Sampling | Sampling Location | Sampling Time | Sample Type  | Air Sample Vol (m <sup>3</sup> ) | Laboratory Results | Measurement Result       |
|------------------|-------------------|---------------|--------------|----------------------------------|--------------------|--------------------------|
|                  |                   |               |              |                                  | Weight Gain (mg)   | RSP (ug/m <sup>3</sup> ) |
| 25-04-2016       | Discovery Bay     | 17:00 - 17:00 | Field Sample | 1699.2                           | 18.6               | 10.9                     |

Note: Air sample volume and concentration are corrected to 298K and 101.3 kPa

## Annex C2 24-hour RSP Monitoring Results

### 24-hour RSP Monitoring Results



**Station: Discovery Bay**

| Start     |       | Finish    |       | Weather | Filter Weight (g) |        | Elapsed Time Reading |          | Sampling Time (hrs) | Flow Rate (m <sup>3</sup> /min) |       |         | RSP Conc. (µg/m <sup>3</sup> ) | Limit Level (µg/m <sup>3</sup> ) | Filter ID |
|-----------|-------|-----------|-------|---------|-------------------|--------|----------------------|----------|---------------------|---------------------------------|-------|---------|--------------------------------|----------------------------------|-----------|
| Date      | Time  | Date      | Time  |         | Initial           | Final  | Initial              | Final    |                     | Initial                         | Final | Average |                                |                                  |           |
| 25-Apr-16 | 17:00 | 26-Apr-16 | 17:00 | Cloudy  | 2.8150            | 2.8336 | 19533.16             | 19557.17 | 24.01               | 1.18                            | 1.18  | 1.18    | 11                             | 180                              | 061532    |

Annex D

## Graphical Presentation of the Air Quality Monitoring Results

### 24-hr RSP Monitoring

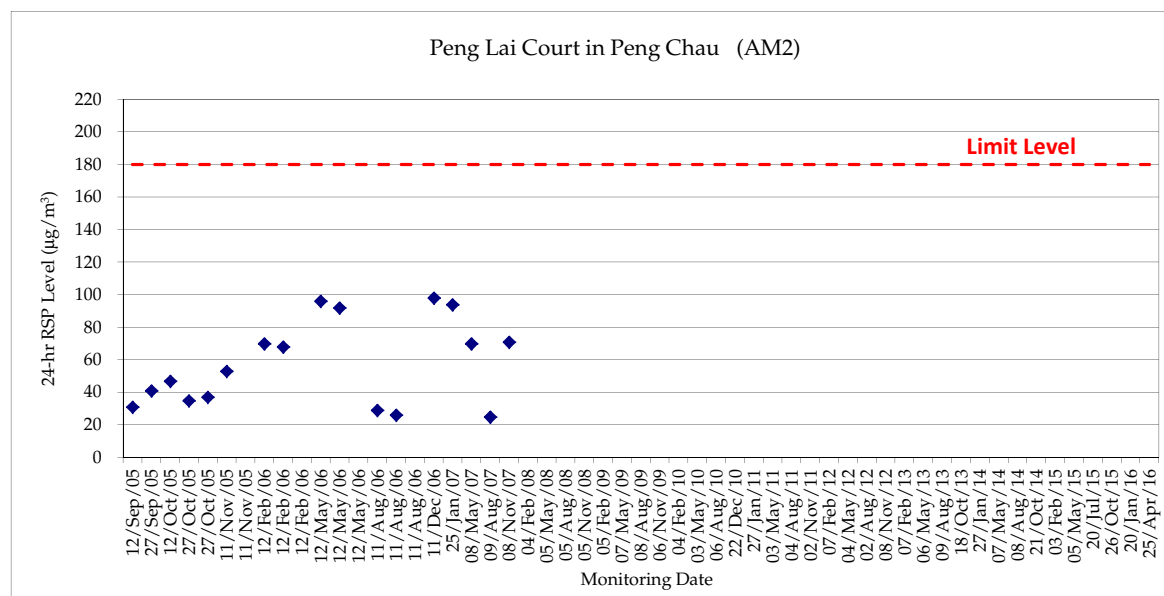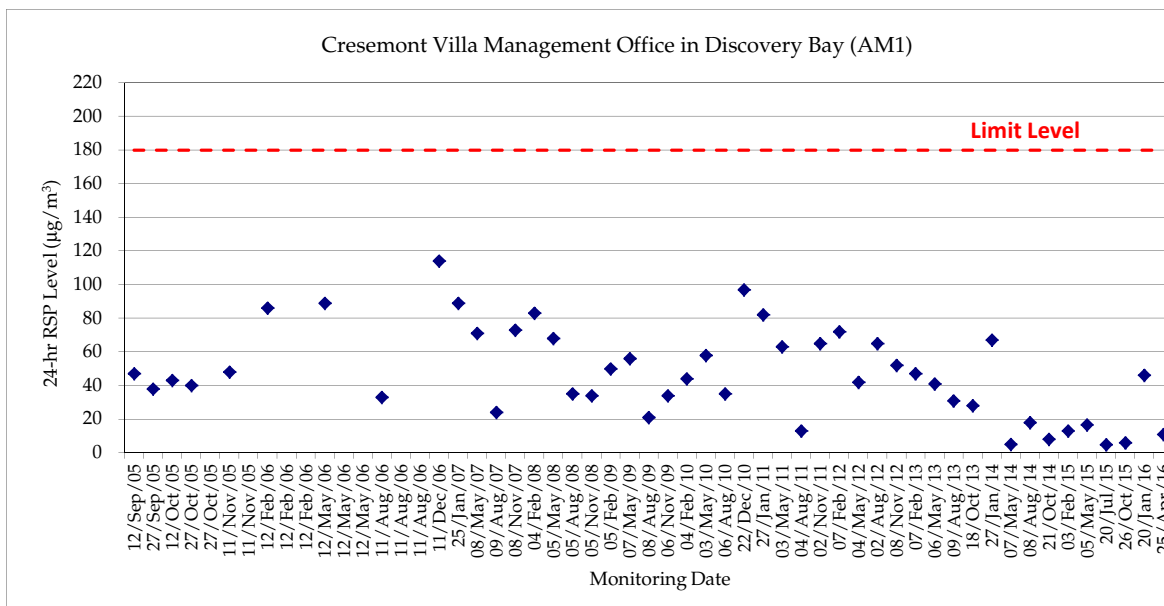


**Remark:**

- 1) Field duplicate was taken at Peng Lai Court (AM2) on 27 Oct 2005.
- 2) Field blank was taken at Peng Lai Court (AM2) on 11 Nov 2005.
- 3) Field blank and field duplicate were taken at Peng Lai Court (AM2) on 12 Feb, 12 May & 11 August 2006.
- 4) Only AM1 is identified as air quality monitoring station in the revised Operational EM&A plan (Revision F).

Annex E

## Graphical Presentation of the Fireworks Noise Monitoring Results


## Annex E1 - Fireworks Noise Monitoring at Discovery Bay and Peng Chau

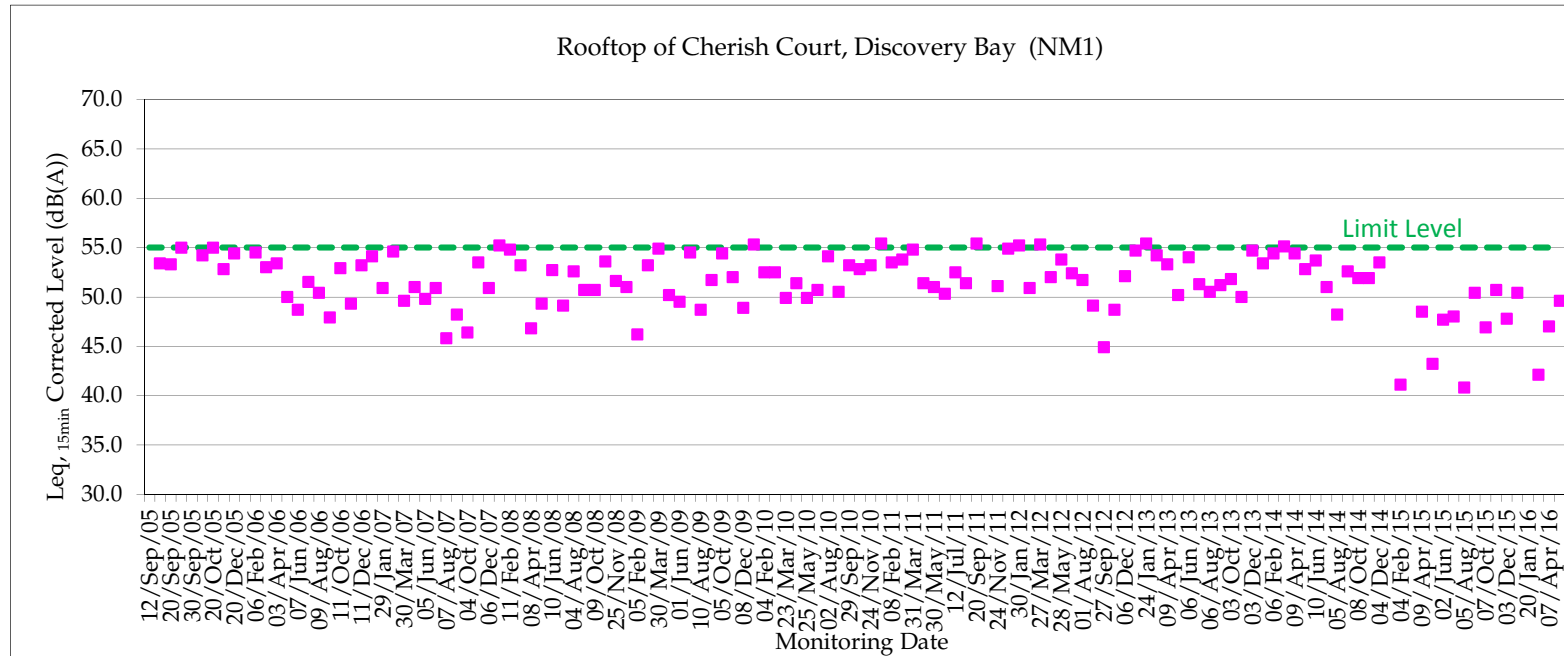

### Remark:

March 2015 and 20 January 2016 are less than 30dB(A) or undetermined, and therefore the results are not shown in the graph.

## Annex E2 - Fireworks Noise Monitoring at Discovery Bay and Peng Chau

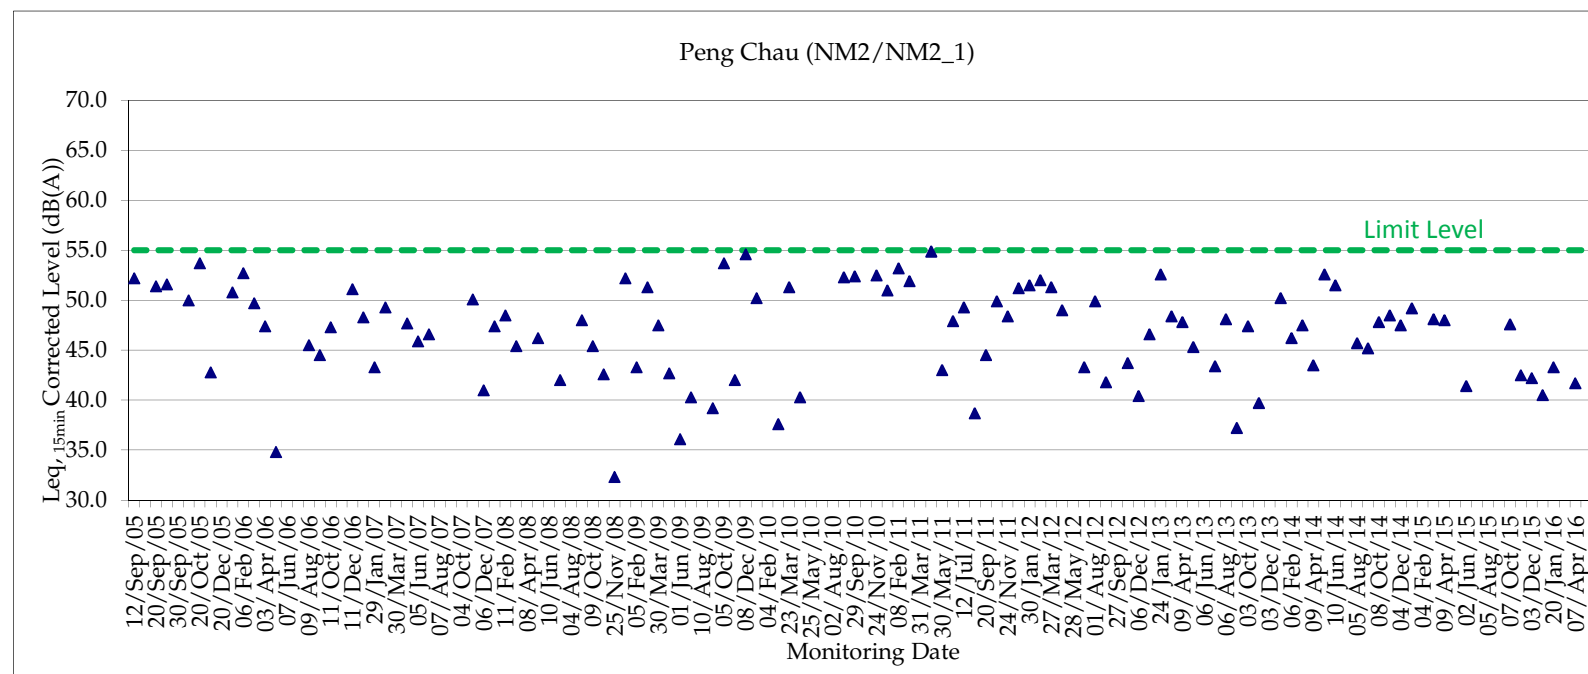


### Remark:

- (1) Measurements on and before 9 April 2013 were taken at Tai Lei (NM2) while those taken after were at Sea Crest Villa Block D (NM2\_1).
- (2) Measured Firework noise levels at NM2 on 30 Sep 2005, 7 June, 5 July and 9 Nov 2006, 30 Mar, 7 Aug, 6 Sept and 4 Oct 2007, 8 Apr, 10 Jun and 4 Aug 2008, 10 Aug 2009, 4 Feb, 25 May, 29 Jun, 2 Aug and 1 Nov 2010, 31 March 2011, 28 May 2012 and 27 Sep 2012 are less than 30dB(A) or undetermined, and therefore the result is not shown in the graph.
- (3) Measured Firework noise level at NM2\_1 on 6 June 2013, 3 Dec 2013, 7 July 2014, 4 Feb 2015, 5 May 2015, 2 July 2015, 5 Aug 2015, 1 Sept 2015, 1 Mar 2016 and 4 May 2016 is undetermined, and therefore the result is not shown in the graph.

Annex F

## Graphical Presentation of the Fixed Plant Noise Monitoring Results

Annex F - Fixed Plant Noise at Central Maintenance Building (Disney)

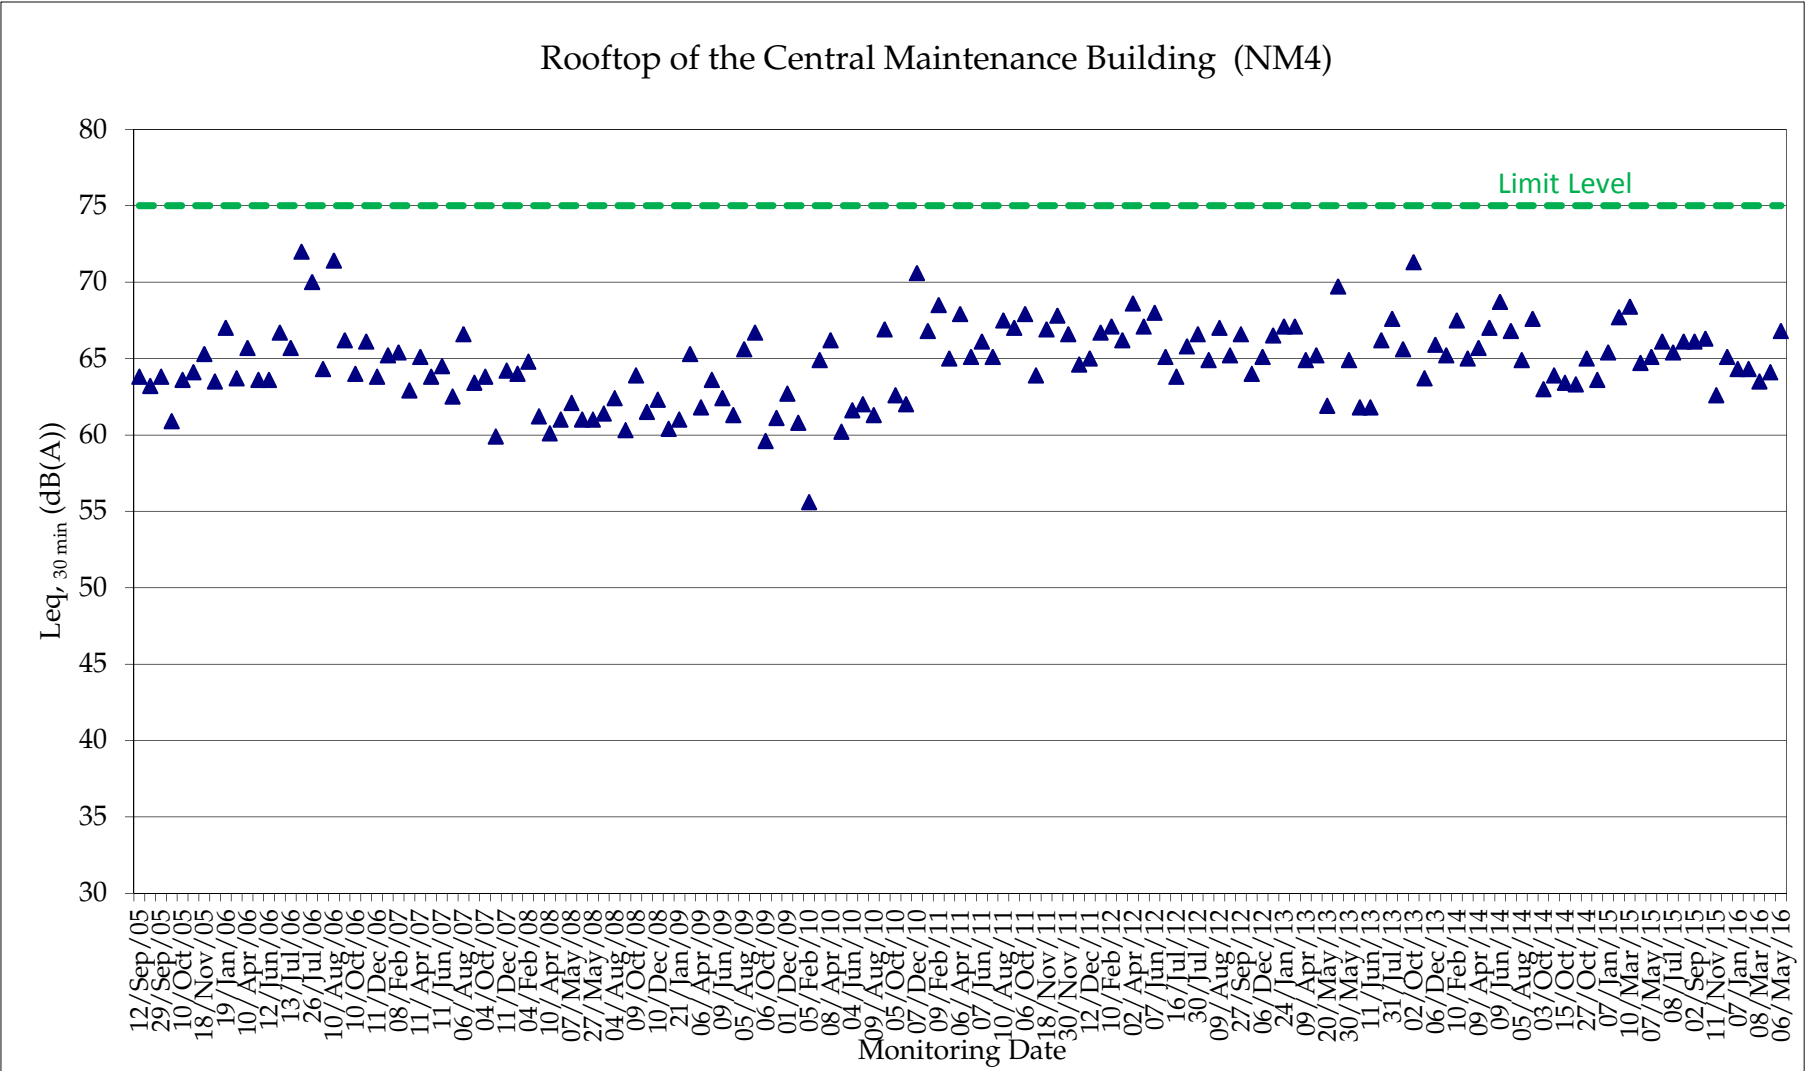

Annex G

## Summary of Implementation Status

## APPENDIX G – MEASURES RECOMMENDED IN THE EP AND EIA THAT ARE APPLICABLE TO THE OPERATION OF THE THEME PARK

| Permit Ref.*                           | EM&A Log Ref <sup>†</sup> | Environmental Protection Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Location/Duration of Measures/Timing of Completion of Measures                                                                                                                              | Remarks                                                                                                                                        |
|----------------------------------------|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>AIR QUALITY - Operational Phase</i> |                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                             |                                                                                                                                                |
| 3.5                                    | A3                        | Pyrotechnics or fireworks that contain chromium, lead, mercury, arsenic, manganese, nickel or zinc shall not be used for any display in the theme park.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Fireworks launching site / during fireworks display                                                                                                                                         | Pyrotechnics or fireworks that contain chromium, lead, mercury, arsenic, manganese, nickel or zinc are not used for any display in the Resort. |
| 3.6                                    | -                         | Before the operation of the Project, the Permit Holder shall deposit with the Director the details and design of the fireworks displays for the Theme Park. Any changes to the details or design of the fireworks displays shall be reviewed by the ET Leader and deposited with the Director.                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Fireworks launching site / prior to the commencement of operations at the Theme Park, and deposit the details when there are any changes to the details of design of the fireworks displays | HKITP submitted the details and design of the fireworks displays to EPD on 6 September 2005.                                                   |
| 3.7                                    | -                         | To mitigate air quality impacts, fireworks displays shall be designed and conducted to achieve the air quality criteria adopted in the EIA Report.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Fireworks launching site / during fireworks display                                                                                                                                         | Both results of the Trial Fireworks Displays conducted in May 2005 and in August 2005 demonstrated compliance.                                 |
| 3.8                                    | A1                        | The Permit Holder shall not operate diesel- or petrol-powered vehicles for internal traffic solely within the Theme Park area, except provided herein or otherwise approved by the Director under this condition. The Permit Holder shall provide written notice at least 24 hours in advance to the Director whenever a diesel- or petrol-powered vehicle is placed into operation, state the application for which that vehicle was placed into operation, and why a compressed natural gas (CNG), liquefied petroleum gas (LPG), electric or other clean fuel vehicle was not practicable for that particular application. This condition shall not apply to emergency vehicles, and shall not apply to vehicles not operated by the Permit Holder. | Within the Theme Park for the full duration of its operating lifetime.                                                                                                                      | Written notice was submitted to the EPD on 6 September 2005 for the unleaded gasoline-powered vehicles to be operated within the Resort.       |
| 3.9                                    | A2                        | To mitigate the air quality impacts from the Penny's Bay Gas Turbine Plant (GTP), building height within the Theme Park shall be restricted at 50 metres above ground within 500 metres from the chimneys of the GTP and restricted at 100 metres above ground between 500 metres and 1,000 metres from the chimneys of the GTP, unless the Permit Holder can demonstrate to the Director's satisfaction that the buildings shall not affect the dispersion of the emissions from the GTP and shall not cause adverse air quality impacts.                                                                                                                                                                                                             | Within the Theme Park for the full duration of its operating lifetime.                                                                                                                      | The mitigation measures were implemented during the design and construction of the Resort.                                                     |

\* Ref. to EP-01/059/2000/C. The EP takes precedence whenever there is a similar requirement listed in both the EP and the EIA implementation schedule.

<sup>†</sup> Ref. to Table 16.1p of the EIA report.

| Permit Ref.*                                       | EM&A Log Ref <sup>†</sup> | Environmental Protection Measures                                                                                                                                                                                                                                                                                                                                                                                                                        | Location/Duration of Measures/Timing of Completion of Measures                                                          | Remarks                                                                                                                                                                                                                                                                                            |
|----------------------------------------------------|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>NOISE - Operational Phase</i>                   |                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                         |                                                                                                                                                                                                                                                                                                    |
| 3.10                                               | B7                        | The bursting height of fireworks displays within the Theme Park shall not exceed 150 meters above Principal Datum.                                                                                                                                                                                                                                                                                                                                       | Fireworks launching site / during fireworks display                                                                     | All manufacturers supplying fireworks product to HKITP complied with the 150m requirement and field measurement methodology of the bursting height of fireworks displays was developed and agreed with the Commissioner of Mines (CoM) of the Civil Engineering and Development Department (CEDD). |
| 3.11                                               | B5                        | Hotels within the Project shall not rely on openable windows for ventilation.                                                                                                                                                                                                                                                                                                                                                                            | At the resort hotels / throughout the operation of the hotels.                                                          | The ventilation systems of the hotels have been designed and constructed to not rely on openable windows for ventilation.                                                                                                                                                                          |
| <i>Fixed Plant noise from Theme Park operation</i> |                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                         |                                                                                                                                                                                                                                                                                                    |
| -                                                  | B1                        | 5 m to 9 m earth berm encircling the Theme Park. (Figure 2.7b in EIA Report refers)                                                                                                                                                                                                                                                                                                                                                                      | Encircling the Theme Park / throughout the operation of the Theme Park.                                                 | Berms of 5m to 9m height were constructed.                                                                                                                                                                                                                                                         |
| -                                                  | B2                        | A reference noise source level of 75 dB(A) at the Theme Park perimeter                                                                                                                                                                                                                                                                                                                                                                                   | At unshielded position along the top of the 9 m high perimeter earth berm / throughout the operation of the Theme Park. | Noise monitoring was conducted to monitor the fixed plant noise from Resort operation and results demonstrated compliance.                                                                                                                                                                         |
| <i>WATER QUALITY- Operational Phase</i>            |                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                         |                                                                                                                                                                                                                                                                                                    |
| <i>Marine Water Quality</i>                        |                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                         |                                                                                                                                                                                                                                                                                                    |
| 3.13                                               | C1                        | All storm water shall flow through silt traps within the Project prior to entering the stormwater system.                                                                                                                                                                                                                                                                                                                                                | To be implemented throughout the full operational lifetime of the Theme Park                                            | Silt traps were constructed and all storm water will flow through silt traps prior to entering the stormwater system.                                                                                                                                                                              |
| 3.14                                               | C2                        | Spent fireworks shall be collected immediately after the completion of the firework displays. The collection and disposal of spent fireworks shall be in accordance with the waste management plan for the operational stage approved under Condition 3.21 of this Permit.                                                                                                                                                                               | To be undertaken after all fireworks displays throughout the full operational lifetime of the Theme Park                | Spent fireworks are collected in accordance with the approved Operational Waste Management Plan.                                                                                                                                                                                                   |
| 3.15                                               | C3                        | Monitoring of residual chlorine concentration in disinfected water shall be conducted prior to discharge of the disinfected water. No discharge of any water with chlorine concentration higher than 0.01 mg L <sup>-1</sup> at the boundary of the 200-metre mixing zone shall be allowed or no discharge of any water from the attraction rides within the Theme Park with chlorine concentration higher than 0.1 mg L <sup>-1</sup> shall be allowed. | To be implemented throughout the full operational lifetime of the Theme Park                                            | Monitoring will be conducted prior to discharge of the disinfected water.                                                                                                                                                                                                                          |
| 3.16                                               | C7                        | Pesticides and herbicides used in the Project shall be biodegradable and with half-lives of three days or less, or approved by the Director.                                                                                                                                                                                                                                                                                                             | To be implemented throughout the full operational lifetime of the Theme Park                                            | Pesticides and herbicides with half-lives of three days or more has not been used in the landscaped areas                                                                                                                                                                                          |

| Permit Ref.*                     | EM&A Log Ref <sup>†</sup> | Environmental Protection Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Location/Duration of Measures/Timing of Completion of Measures                                                                                               | Remarks                                                                                                                                                                                                                                                                                                 |
|----------------------------------|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                  |                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                              | within the Resort. Variation of this condition was submitted to the EPD and EP-01/059/2000/B was issued on 19 October 2005. The condition was changed to "Pesticides and herbicides used in the Project shall be biodegradable and with half-lives of three days or less, or approved by the Director". |
| 3.17                             | C8                        | A log book shall be kept in the Theme Park to record the application of any pesticides or herbicides, date and time, location of application, quantities applied, pesticide/herbicide used and weather conditions. The logbook shall always be readily available for inspection by the Director throughout the operation stage.                                                                                                                                                                                                                                                                                                  | Prior to and throughout the use of pesticides and herbicides                                                                                                 | A log book was kept in the Resort to record the application of any pesticides or herbicides, date and time, location of application, quantities applied, pesticide/herbicide used and weather conditions.                                                                                               |
| <i>WASTE - Operational Phase</i> |                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                              |                                                                                                                                                                                                                                                                                                         |
| <i>Waste Management Plan</i>     |                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                              |                                                                                                                                                                                                                                                                                                         |
| 3.21                             | E1                        | Three sets of waste management plan for the operational phase of the Project shall be submitted to the Director for approval at least one month before the Project commences operation. The plan shall be certified by the IEC as having regard to Section 6.7 and Section 16 of the EIA Report. The plan shall include details of how the mitigation measures of operational waste management will be implemented, together with the arrangements for avoidance, minimization, material recovery/recycling, collection, transportation and disposal of various types of waste generated during the operation of the Theme Park. | To be produced prior to the commencement of operations at the Theme Park, and to be implemented throughout the full operational life-time of the Theme Park  | Operational Waste Management Plan (OWMP) has been submitted to the EPD and approved in September 2005.                                                                                                                                                                                                  |
| <i>Waste Avoidance Measures</i>  |                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                              |                                                                                                                                                                                                                                                                                                         |
|                                  | E3                        | The Theme Park Operator shall implement a waste avoidance programme to minimise the production of waste. The waste avoidance programme may consist of the following components:                                                                                                                                                                                                                                                                                                                                                                                                                                                  | To be developed prior to the commencement of operations at the Theme Park, and to be implemented throughout the full operational life-time of the Theme Park | Operational Waste Management Plan included waste minimization measures and HKITP has incorporated the proposed waste minimization measures as far as practicable.                                                                                                                                       |
|                                  |                           | <ul style="list-style-type: none"> <li>electronic communications (ie voice mail and email); message boards, routing slips and double-sided copying will be used, as far as practical, to reduce the quantities of paper that otherwise would require disposal at landfill;</li> </ul>                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                              |                                                                                                                                                                                                                                                                                                         |
|                                  |                           | <ul style="list-style-type: none"> <li>worn linens to the maximum extent feasible based upon available markets and third-party recycling facilities be used to make scarves and aprons for cast members;</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                              |                                                                                                                                                                                                                                                                                                         |
|                                  |                           | <ul style="list-style-type: none"> <li>soft drinks to the maximum extent feasible based upon available markets and third-party recycling facilities be served in souvenir cups that are taken home by guests for reuse as opposed to being discarded at the Theme Park as waste, appropriate recycling bins should be set up to recover these cups for reuse or recycling if the visitors choose not to take them home;</li> </ul>                                                                                                                                                                                               |                                                                                                                                                              |                                                                                                                                                                                                                                                                                                         |
|                                  |                           | <ul style="list-style-type: none"> <li>hamburgers will be wrapped in paper or equally environmentally acceptable material</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                              |                                                                                                                                                                                                                                                                                                         |

| Permit Ref.*                                      | EM&A Log Ref <sup>†</sup> | Environmental Protection Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Location/Duration of Measures/Timing of Completion of Measures                | Remarks                                                                        |
|---------------------------------------------------|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|--------------------------------------------------------------------------------|
|                                                   |                           | instead of in polystyrene clamshells;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                               |                                                                                |
|                                                   |                           | <ul style="list-style-type: none"><li>unused prepared food will be sent to a food bank, and distributed to the needy, to the maximum extent feasible based upon available markets and third-party recycling facilities;</li><li>excess water-based paints will be reused as far as practical;</li><li>plastic drink cup lids will be supplied to guests upon their request when purchasing beverages;</li><li>fast-food service trays in selected locations will be washed and reused (instead of using disposable cardboard carry-out trays); and</li><li>souvenir, booklets, dining-ware, etc. which are recyclable should have appropriate instruction and signs printed on the surface;</li></ul> |                                                                               |                                                                                |
|                                                   |                           | <ul style="list-style-type: none"><li>waste recycling bins for paper, aluminium cans, plastic bottles, etc. should be provided throughout the Theme Park to promote waste separation at source;</li><li>all products sold in the Theme Park should be packed in minimal amount of packaging materials;</li><li>pallets made of more durable and reusable materials plastics than wood should be used in transportation of food, drinks, etc;</li></ul>                                                                                                                                                                                                                                                |                                                                               |                                                                                |
|                                                   |                           | <ul style="list-style-type: none"><li>the distribution centre of the Theme Park will utilise reusable shipping containers as far as practical instead of cardboard boxes for internal routing’</li><li>fabric fender instead of tropical hardwood fender should be used at the proposed piers; and</li><li>the hoarding of the proposed piers should be metal (aluminium, alloy etc) instead of wood.</li></ul>                                                                                                                                                                                                                                                                                       |                                                                               |                                                                                |
| <i>Materials Recovery and Recycling Programme</i> |                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                               |                                                                                |
|                                                   |                           | The Theme Park Operator shall implement a Materials Recovery and Recycling Programme which shall include the following aspects:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                               | Waste minimization measures have been implemented in accordance with the OWMP. |
|                                                   | E4                        | <i>Papers:</i> Recycling bins will be provided at shops and food service locations to collect cardboard containers. Personnel in every office will be provided with individual bins to recycle office paper. Large containers for recycling paper will be placed next to photocopy machines. The collected paper will be transported to RCPs at the back of house for sorting and baling.                                                                                                                                                                                                                                                                                                             | To be implemented throughout the full operational life-time of the Theme Park |                                                                                |
|                                                   | E5                        | <i>Glass Bottles and Glass Jars:</i> Recycling bins will be placed in the service areas next to the restaurants. The collected glass bottles and jars will be transported to the RCP for processing and recycling.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | To be implemented throughout the full operational life-time of the Theme Park |                                                                                |
|                                                   | E6                        | <i>Aluminium Cans:</i> Aluminium can recycling bins will be placed at all break areas and pantries. The collected aluminium cans will be transferred to the RCP for baling.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | To be implemented throughout the full operational life-time of the Theme Park |                                                                                |
|                                                   | E7                        | <i>Plastics:</i> The Theme Park will implement a source separating programme for polyethylene teraphthalate (PET), high-density and low-density polyethylene (HDPE & LDPE). The PET and HDPE bottles collected will be transferred to the RCPs for collection by the recyclers.                                                                                                                                                                                                                                                                                                                                                                                                                       | To be implemented throughout the full operational life-time of the Theme Park |                                                                                |

| Permit Ref.*          | EM&A Log Ref <sup>†</sup> | Environmental Protection Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                | Location/Duration of Measures/Timing of Completion of Measures                             | Remarks                                                                                                                                                                                                                                                                                                           |
|-----------------------|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                       |                           | LDPE will also be recycled. Shrink wrap will be recovered and delivered to the RCPs. Once sufficient material is accumulated to fill a truck, the recycler will be called in to collect the material. The recycling programme may extend to cover other types of plastics or to recycle mixed plastic if the technology is available to make the plastic recycling programme more efficient and cost-effective.                                                                  |                                                                                            |                                                                                                                                                                                                                                                                                                                   |
|                       | E8                        | <i>Kitchen Grease:</i> Should there be a market for kitchen grease in Hong Kong, the Theme Park Operator will consider establishing a kitchen grease recycling programme in Hong Kong.                                                                                                                                                                                                                                                                                           | To be implemented throughout the full operational life-time of the Theme Park              |                                                                                                                                                                                                                                                                                                                   |
|                       | E9                        | <i>Scrap Metal:</i> Scrap metal will be generated and separated at the machine, welding, automotive and sheet metal shops. Scrap metal will also be collected, when feasible, on construction and demolition and rehabilitation projects. Scrap metal will be placed in roll on/off containers. Once the containers is full, the recycler will be called in to remove the loaded container and return an empty one.                                                              | To be implemented throughout the full operational life-time of the Theme Park              |                                                                                                                                                                                                                                                                                                                   |
|                       | E10                       | <i>Laser Printer Toner Cartridges:</i> The Theme Park will make arrangements with the toner cartridge suppliers to collect and recycle all the used toner cartridges for laser printers and avoid disposal of the cartridges at the WENT landfill as far as practical.                                                                                                                                                                                                           | To be implemented throughout the full operational life-time of the Theme Park              |                                                                                                                                                                                                                                                                                                                   |
|                       | E11                       | <i>Green Waste:</i> As the handling capacity of the existing Sha Ling composting facility is limited (about 15 to 20 tpd) and is unlikely to be able to handle the additional green waste generated from the Theme Park. Should there be a market or facility which could process the green waste arising from the Theme Park, HKITP will consider establishing a recycling programme for green waste.                                                                           | To be implemented throughout the full operational life-time of the Theme Park              |                                                                                                                                                                                                                                                                                                                   |
|                       | E12                       | <i>Scrap Lumber:</i> Broken pallets, wooden scrap and lumber from demolition projects will be collected and recycled as far as practical. Currently, there is a market for scrap lumber and it is anticipated that the scrap lumber generated from the Theme Park could be adsorbed by the local market.                                                                                                                                                                         | To be implemented throughout the full operational life-time of the Theme Park              |                                                                                                                                                                                                                                                                                                                   |
|                       | E13                       | <i>Asphalt:</i> The Theme Park will require contractors to reuse and recycle as much as practical of the used asphalt generated from the construction and rehabilitation of asphalt roadways and parking lots. Any surplus used asphalt will be delivered to public filling facilities instead of landfill.                                                                                                                                                                      | To be implemented throughout the full operational life-time of the Theme Park              |                                                                                                                                                                                                                                                                                                                   |
| <i>Chemical Waste</i> |                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                            |                                                                                                                                                                                                                                                                                                                   |
|                       | E14                       | Wherever practicable, processes which generate reduced quantities or no chemical waste, or less dangerous types of chemical waste, shall be used.                                                                                                                                                                                                                                                                                                                                | To be implemented prior to and throughout the full operational life-time of the Theme Park | Chemical Waste Store was constructed in accordance with the <i>Code of Practice on the Packaging, Labelling and Storage of Chemical Waste</i> . The temporary storage of the chemical wastes was also provided in accordance with the Code of Practice on the Packaging, Labelling and Storage of Chemical Waste. |
|                       | E15                       | Containers used for storage of chemical wastes shall: <ul style="list-style-type: none"> <li>• be suitable for the substance they are holding, resistant to corrosion, maintained in a good condition, and securely closed;</li> <li>• have a capacity of less than 450 L unless the specifications have been approved by the EPD; and</li> <li>• display a label in English and Chinese in accordance with instructions prescribed in Schedule 2 of the Regulations.</li> </ul> | To be implemented prior to and throughout the full operational life-time of the Theme Park |                                                                                                                                                                                                                                                                                                                   |

| Permit Ref.*                                            | EM&A Log Ref <sup>†</sup> | Environmental Protection Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Location/Duration of Measures/Timing of Completion of Measures                                                                      | Remarks                                                                                                                                                                      |
|---------------------------------------------------------|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                         | E16                       | The storage area for chemical wastes should be: <ul style="list-style-type: none"> <li>• by clearly labelled and used solely for the storage of chemical waste;</li> <li>• be enclosed on at least 3 sides;</li> <li>• have an impermeable floor and bunding, of capacity to accommodate 110% of the volume of the largest container or 20% by volume of the chemical waste stored in that area, whichever is the greatest;</li> <li>• have adequate ventilation;</li> <li>• be covered to prevent rainfall entering (water collected within the bund must be tested and disposed as chemical waste if necessary); and</li> <li>• be arranged so that incompatible materials are adequately separated.</li> </ul> | To be implemented prior to and throughout the full operational life-time of the Theme Park                                          |                                                                                                                                                                              |
|                                                         | E17                       | Disposal of chemical waste shall: <ul style="list-style-type: none"> <li>• be via a licensed waste collector;</li> <li>• be to a facility licensed to receive chemical waste, such as the Chemical Waste Treatment Facility which also offers a chemical waste collection service and can supply the necessary storage containers; or be to a re-user of the waste, under approval from the EPD.</li> </ul>                                                                                                                                                                                                                                                                                                       | To be implemented prior to and throughout the full operational life-time of the Theme Park                                          | <i>Waste Disposal Ordinance</i><br><i>Code of Practice on the Packaging, Handling and Storage of Chemical Wastes</i><br>Waste Disposal (Chemical Waste) (General) Regulation |
| <i>TERRESTRIAL ECOLOGY - Operational Phase</i>          |                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                     |                                                                                                                                                                              |
| 3.18                                                    | F1                        | To minimize the disturbance to the White-bellied Sea Eagles at Pa Tau Kwu, no fireworks shall be launched within 800 metres from the Pai Tau Kwu headland, unless otherwise approved by the Director.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Within Theme Park prior to and during the fireworks and laser show for the full operational period of the Theme Park                | No fireworks were launched within 800 metres from the Pai Tau Kwu headland.                                                                                                  |
| 3.19                                                    | F2                        | To protect the White-bellied Sea Eagles, laser effects used in the Project shall utilize lasers of power range not greater than 30 Watt and any laser beam shall not be directed towards the Pa Tau Kwu area. All laser effects shall be terminated against fixed, non-reflective objects within the Project to prevent any impacts on people and terrestrial faunal species.                                                                                                                                                                                                                                                                                                                                     | Within Theme Park prior to and during the fireworks and laser show for the full operational period of the Theme Park                | No laser is planned to be used for the opening day configuration of the Resort.                                                                                              |
|                                                         | F3                        | Fence off the public land access from the Theme Park to prevent human disturbance to the White-bellied Sea Eagle.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | North side of the Theme Park close to Pa Tau Kwu secondary woodland, during and throughout the operational period of the Theme Park | Public land access from the Theme Park was fenced off.                                                                                                                       |
| <i>MARINE ECOLOGY AND FISHERIES - Operational Phase</i> |                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                     |                                                                                                                                                                              |
| <i>Marine Ecological Resources: Marine Mammals</i>      |                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                     |                                                                                                                                                                              |
| 3.20                                                    | G1                        | The speed of ferries and vessels of the Theme Park shall not exceed 10 knots when passing through an area within 500 metres from the reclamation limit.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | During and throughout the operational period of the Theme Park                                                                      | Not applicable. No ferries and vessels are currently operated by HKITP.                                                                                                      |
|                                                         | G1                        | The following mitigation measures shall be implemented to minimize potential operational impacts on dolphins and porpoises:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                     |                                                                                                                                                                              |
|                                                         |                           | 1. The vessel operators shall be required to use predefined and regular routes, as these will become known to dolphins and porpoises using these waters;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | During and throughout the operational period of the Theme Park                                                                      | Not applicable. No ferries and vessels are currently operated by HKITP.                                                                                                      |
|                                                         |                           | 2. The vessel operators shall be required to control and manage all effluent from vessels;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | During and throughout the operational period of the Theme Park                                                                      | Not applicable. No ferries and vessels are currently operated by                                                                                                             |

| Permit Ref.*                                      | EM&A Log Ref <sup>†</sup> | Environmental Protection Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Location/Duration of Measures/Timing of Completion of Measures | Remarks                                                                                                                                                                                                                                                                                                      |
|---------------------------------------------------|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                   |                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                | HKITP.                                                                                                                                                                                                                                                                                                       |
|                                                   |                           | 3. Operation-phase dolphin/porpoise monitoring shall be conducted by a qualified research team, to evaluate whether there have been any effects on the animals. The resulting data should be compatible with, and should be made available for, long-term studies of small cetacean ecology in Hong Kong.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | During the operational period of the Theme Park                | Monitoring of dolphin/porpoise monitoring has been conducted for one year (2008-2009). HKITP has proposed, in consultation with AFCD, to terminate the monitoring of marine mammals after July 2009. Proposal for termination of dolphin/porpoise monitoring was submitted to EPD and AFCD on 6 August 2009. |
| <i>HAZARD - Operational Phase</i>                 |                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                |                                                                                                                                                                                                                                                                                                              |
| 3.12                                              |                           | The Hazard Management Plan as submitted on 14 July 2000 shall be fully implemented.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                | The Hazard Management Plan has been reviewed in the EIA Review Report which was submitted to EPD in June 2005.                                                                                                                                                                                               |
| <i>Fireworks Storage, Transport &amp; Display</i> |                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                |                                                                                                                                                                                                                                                                                                              |
|                                                   | H1                        | The fireworks store will be constructed in accordance with the requirements specified in the Dangerous Goods Regulations, CAP 295 and any additional requirements as specified by the Commissioner of Mines and the Director of Fire Services. Such requirements include for example, separation distance of 101m to spectator areas within the Theme Park, 101m to buildings and high occupancy sites outside the Theme Park and 50m to public roads and low occupancy areas outside the Theme Park.                                                                                                                                                                                                                                                                                        | During design                                                  | The fireworks store has been constructed in accordance with the stipulated requirements.                                                                                                                                                                                                                     |
|                                                   | H2                        | The fireworks display including mid-level shows, low-level shows and stage shows shall be designed and conducted in accordance with the requirements of NFPA 1123 and 1126. This may include for example, separation distance of 107m from the firing site (for mid-level show) to public areas (both Theme Park visitors and off-site public) and separation distance of 214m from the firing site to other dangerous goods stores. Any additional requirements on fireworks display as specified by the Secretary of Home Affairs, Fire Services Department, Commissioner of the Television and Entertainment Licensing Authority will also be adopted. The specific distances above may vary based on maximum shell size as the distances above assume five inch (125 millimetre) shells. | During design and operation                                    | The fireworks display including mid-level shows, low-level shows and stage shows have been designed and conducted in accordance with the requirements of NFPA 1123 and 1126.                                                                                                                                 |
|                                                   | H4                        | A chain link fence will be installed around the firing site as a ballistic barricade to catch and deflect low trajectory shells (typically less than 15 degrees from horizontal and which have potential to burst near spectators under normal burst times) fired from a disrupted mortar such that they cannot travel towards spectators or members of the public.                                                                                                                                                                                                                                                                                                                                                                                                                          | During design                                                  | A chain link fence has been installed.                                                                                                                                                                                                                                                                       |
|                                                   | H5                        | The launch system (for mid-level display) will be designed such that mortars will remain in upright position following the failure of any given mortar or even otherwise.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | During design                                                  | The proposed launch system has been designed and constructed.                                                                                                                                                                                                                                                |
|                                                   | H6                        | Identify agencies to be contacted and establish mechanisms for reporting incidents of non-recoverable load in the event of load fall into sea while unloading at the jetty.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | During operation                                               | Agency has been identified for reporting incidents.                                                                                                                                                                                                                                                          |

| Permit Ref.*                                     | EM&A Log Ref <sup>†</sup> | Environmental Protection Measures                                                                                                                                                                                                                                                | Location/Duration of Measures/Timing of Completion of Measures | Remarks                                                                                          |
|--------------------------------------------------|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|--------------------------------------------------------------------------------------------------|
|                                                  | H7                        | Mobile phones, walkie-talkies should not be carried by persons handling fireworks.                                                                                                                                                                                               | During operation                                               | Procedures have been developed and are implemented by Firework Team.                             |
|                                                  | H8                        | Fireworks store should be kept closed during fireworks display.                                                                                                                                                                                                                  | During operation                                               | Procedures have been developed and are implemented by Firework Team.                             |
|                                                  | H9                        | Ensure igniters are not stored with the bulk of fireworks/pyrotechnics.                                                                                                                                                                                                          | During design and operation                                    | Igniters are not stored with the bulk of fireworks/pyrotechnics.                                 |
|                                                  | H10                       | The site for manipulation of fireworks need to be identified. The site shall be located at adequate safety distance from the store and public areas.                                                                                                                             | During design and operation                                    | It is not required to manipulate the fireworks on-site.                                          |
|                                                  | H11                       | Procedures to be developed to minimise unnecessary handling/sorting of products for fireworks show inside the store. This should include adequate labelling of both outer packaging and product to aid easy identification.                                                      | During operation                                               | Procedures have been developed and are implemented by Firework Team.                             |
|                                                  | H12                       | If vehicles such as fork lift trucks are used for transfer of goods from store to pre-rigging area or display site, it should meet appropriate specifications as identified by the Division of Mines. When feasible, forklifts shall operate in reverse when carrying fireworks. | During design and operation                                    | Procedures have been developed and are implemented by Firework Team.                             |
|                                                  | H14                       | Disney's vendor supply of 4" and 5" shells must ensure items destined for other Disney locations are not delivered by error to this site unless conforming to requirements of this site.                                                                                         | During operation                                               | Not applicable. No 4" and 5" shells are currently used in the fireworks show.                    |
|                                                  | H15                       | Procedures to be developed if trailers are to be used for mortar installation.                                                                                                                                                                                                   | During operation                                               | Mortars have been permanently installed.                                                         |
|                                                  | H16                       | Any mechanical system designed for varying mortar orientation should be such that it does not result in mortars orientated towards spectators.                                                                                                                                   | During design and operation                                    | Mortars have been permanently installed.                                                         |
|                                                  | H17                       | Use of permanently installed mortars or other similar or safer alternatives to be considered.                                                                                                                                                                                    | During design and operation                                    | Mortars have been permanently installed.                                                         |
|                                                  | H18                       | Design and position of fence to ensure containment of low trajectory shells towards spectators as well as road (off-site).                                                                                                                                                       | During design and operation                                    | Position of fence has been properly designed and constructed.                                    |
|                                                  | H19                       | The weather conditions under which fireworks display need to be moderated should be identified in procedures based on site layout and weather data. The procedures should also identify persons responsible for making such decisions.                                           | During operation                                               | Procedures have been developed and are implemented by Firework Team.                             |
|                                                  | H20                       | Procedures for safe handling and disposal of unfired and misfired items to be developed.                                                                                                                                                                                         | During operation                                               | Procedures have been developed and are implemented by Firework Team.                             |
|                                                  | H21                       | Procedures to be established for sweeping site after display.                                                                                                                                                                                                                    | During operation                                               | Procedures have been developed and are implemented by Firework Team.                             |
|                                                  | H22                       | Separation distances as specified in NFPA 1123 and 1126 for 'other fireworks items' (ie, other than aerial shells) used for mid-level, low-level and stage shows will be adopted.                                                                                                | During operation                                               | Procedures have been developed and are implemented by Firework Team.                             |
|                                                  | H23                       | Members of the audience will not be invited on stage during the course of discharge of fireworks or pyrotechnics.                                                                                                                                                                | During operation                                               | Audiences were not invited on stage during the course of discharge of fireworks or pyrotechnics. |
|                                                  | H25                       | Quality control measures to ensure that offspec. fireworks items are not received/used at displays/shows.                                                                                                                                                                        | During operation                                               | Procedures have been developed and are implemented by Firework Team.                             |
| <i>EM&amp;A REQUIREMENTS - Operational Phase</i> |                           |                                                                                                                                                                                                                                                                                  |                                                                |                                                                                                  |

| Permit Ref.*                                         | EM&A Log Ref <sup>†</sup> | Environmental Protection Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Location/Duration of Measures/Timing of Completion of Measures                                                                                              | Remarks                                                                                                                                                                                                                                                                                                                                                                                                                         |
|------------------------------------------------------|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>Air Quality and Noise</i>                         |                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 3.1                                                  |                           | Before the operation of the Project, the Permit Holder shall carry out trial firework displays and associated air quality and noise monitoring. The details of the trial and monitoring programme shall be submitted to the Director for agreement at least one month prior to the trial fireworks displays. The results of the trial fireworks displays shall be submitted to the Director for agreement prior to the operation of the Project. The results of the trial tests and associated air quality data shall be provided to the Advisory Council on the Environment for consultation, as directed by the Director.                                                        | During trial fireworks displays only                                                                                                                        | Trial firework displays and associated air quality and noise monitoring have been conducted. Results of the Trial Fireworks Displays were submitted to EPD and provided to ACE for consultation. .                                                                                                                                                                                                                              |
| 3.2                                                  |                           | No later than one month before the operation of the Project, the Permit Holder shall submit for the Director's approval an Operational Environmental Monitoring and Audit (EM&A) Plan for the operation of the Project. Before the submission to the Director, the EM&A Plan shall be certified by the IEC as having regard to Annex N of the EIA Report. All measures recommended in the approved EM&A Plan shall be fully and properly implemented in accordance with the requirements and time schedule(s) set out in the EM&A Plan. The Operational Environmental Monitoring and Audit Plan approved under this condition shall hereinafter be referred to as the "EM&A Plan". | To be produced prior to the commencement of operations at the Theme Park, and to be implemented throughout the full operational life-time of the Theme Park | EM&A Plan (Revision B) was approved by the EPD on 26 January 2007.<br>EM&A Plan (Revision C) was approved by the EPD on 19 December 2007.<br>EM&A Plan (Revision D) was approved by the EPD on 11 August 2008.<br>EM&A Plan (Revision E) was approved by the EPD on 21 November 2008.<br>EM&A Plan (Revision F) was approved by the EPD on 9 November 2009.<br>EM&A Plan (Revision G) was approved by the EPD on 11 April 2012. |
| 3.3                                                  |                           | Air quality and noise monitoring on fireworks displays, including monitoring stations to be located at Discovery Bay and Peng Chau and to be agreed with by the Director, shall be conducted during the operation of the Project. On the basis of such findings, mitigation measures, if needed, shall be implemented to the satisfaction of the Director. The details of the monitoring shall be included in the EM&A Plan.                                                                                                                                                                                                                                                       | At specified air and noise monitoring locations for the 1 <sup>st</sup> operational year and throughout the duration of the operational phase respectively  | Air quality and noise monitoring should be conducted in accordance with the requirement specified in the approved EM&A Plan.<br>Alternative monitoring station at Sea Crest Villa Block D, Peng Chau has been approved by the EPD on 14 June 2013 and revised in the EM&A Plan (Revision H).                                                                                                                                    |
| <i>Terrestrial Ecology - White-bellied Sea Eagle</i> |                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 3.4                                                  |                           | Monitoring of the White-bellied Sea Eagles (WBSE) at Pa Tau Kwu shall be carried out for a period of two years during the operational phase of the Theme Park. The two years monitoring period shall commence at the time when all reclamation works under the Environmental Permit No. VEP-18/2000/A/EP-054 are completed. The details of the monitoring shall be included in the EM&A Plan.                                                                                                                                                                                                                                                                                      | The two years monitoring period shall commence prior to the operation of Phase II fireworks displays.                                                       | Monitoring of WBSE will be conducted for a 2-year period when the Theme Park Phase II fireworks displays are launched. The monitoring requirements for WBSE will be proposed by the ET and                                                                                                                                                                                                                                      |

| Permit Ref.*          | EM&A Log Ref <sup>†</sup> | Environmental Protection Measures                                                                                                                                                                                                                                | Location/Duration of Measures/Timing of Completion of Measures | Remarks                                                                                                                                                                                                                                                                                                      |
|-----------------------|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                       |                           |                                                                                                                                                                                                                                                                  |                                                                | agreed with AFCD prior to the commencement of Theme Park Phase II fireworks displays.                                                                                                                                                                                                                        |
| <i>Marine Ecology</i> |                           |                                                                                                                                                                                                                                                                  |                                                                |                                                                                                                                                                                                                                                                                                              |
|                       | J4                        | Subject to the Environmental Protection Department's (EPD's) agreement, operational phase monitoring of the dolphin/porpoise population shall be conducted by a qualified research team in accordance with the recommendations of Section 10 of the EM&A Manual. | During the operational period of the Theme Park                | Monitoring of dolphin/porpoise monitoring has been conducted for one year (2008-2009). HKITP has proposed, in consultation with AFCD, to terminate the monitoring of marine mammals after July 2009. Proposal for termination of dolphin/porpoise monitoring was submitted to EPD and AFCD on 6 August 2009. |