



South East New Territories (SENT) Landfill Extension

Monthly Environmental Monitoring & Audit Report No.22 for October 2020

November 2020

ERM

2507, 25/F One Harbourfront 18 Tak Fung Street Hunghom, Kowloon Hong Kong T: 2271 3000 F: 2723 5660 www.erm.com





Document/Plan to be Certified / Verified:

South East New Territories (SENT) Landfill Extension

Environmental Certification Sheet EP-308/2008/B and FEP-01/308/2008/B

Reference Document/Plan

Monthly Environmental Monitoring & Audit Report No.22

for October 2020 for South East New Territories (SENT)

Landfill Extension

Date of Report: 6 November 2020

Reference EP Condition

EP Condition: Condition No.3.4

Four hard copies and one electronic copy of monthly EM&A Report shall be submitted to the Director within 10 working days after the end of the reporting month. The EM&A Reports shall include a summary of all non-compliance (exceedances) of the environmental quality performance limits (Action and Limit Levels). The submissions shall be verified by the IEC. Additional copies of the submission shall be provided to the Director upon request by the Director.

ET Certification

I hereby certify that the above referenced document/plan complies with the above referenced condition of EP-308/2008/B and FEP-01/308/2008/B.

Warchett.

Frank Wan,

Environmental Team Leader:

(ERM Hong-Kong, Limited)

Date: 6 November 2020

IEC Verification

I hereby verify that the above referenced document/plan complies with the above referenced condition of EP-308/2008/B and FEP-01/308/2008/B.

W.K. Chiu,

Independent Environmental Checker:

(Meinhardt Infrastructure and

Environment Limited)

Date: 9 Nov 2020

South East New Territories (SENT) Landfill Extension

Monthly Environmental Monitoring & Audit Report for October 2020

Environmental Resources Management

2507, 25/F, One Harbourfront 18 Tak Fung Street Hunghom, Kowloon Hong Kong

Telephone: (852) 2271 3000 Facsimile: (852) 2723 5660 E-mail: post.hk@erm.com http://www.erm.com

| Client: | | Projec | Project No: | | | |
|---|--|----------------------|---|----------|--|--|
| Green Valley Landfill Ltd. | | | 0465169 | | | |
| Summary: | | Date: | | | | |
| | | 6 No | 6 November 2020 | | | |
| This document presents the Monthly EM&A Report No.22 for October 2020 for South East New Territories (SENT) Landfill Extension | | Approved by: Auchit | | | | |
| LXIGISIC | <i>,</i> ,,, | Frank Wan | | | | |
| | | Partr | ner | | | |
| | | | | | | |
| | | | | | | |
| 0 | Monthly EM&A Report No.22 (for October 2020) | AL | FW | FW | 6 Nov 20 | |
| Revision | Description | Ву | Checked | Approved | Date | |
| This report has been prepared by Environmental Resources Management the trading name of 'ERM Hong-Kong, Limited', with all reasonable skill, care and diligence within the terms | | Distribution | | | BSI | |
| of the Contract with the client, incorporating our General Terms and Conditions of Business and taking account of the resources devoted to it by agreement with the client. | | | Internal OHSAS 18001:2007 Certificate No. OHS 51599 | | | |
| We disclaim any responsibility to the client and others in respect of any matters outside the scope of the above. | | \boxtimes | Public | | BSI | |
| This report is confidential to the client and we accept no responsibility of whatsoever nature to third parties to whom this report, or any part thereof, is made known. Any such party relies on the report at their own risk. | | | Confide | | ISO 9001 : 2008 tificate No. FS 32515 | |



CONTENTS

| EXECUI | TIVE SUMMARY | 1 |
|--------|---|-----|
| 1 | INTRODUCTION | 1 |
| 1.1 | BACKGROUND | 1 |
| 1.2 | Project Description | 1 |
| 1.3 | SCOPE OF THE EM&A REPORT | 2 |
| 1.4 | Project Organisation | 2 |
| 1.5 | SUMMARY OF CONSTRUCTION WORKS | 3 |
| 1.6 | SUMMARY OF EM&A PROGRAMME REQUIREMENTS | 4 |
| 1.7 | STATUS OF STATUTORY ENVIRONMENTAL COMPLIANCE WITH THE | |
| | Environmental Permit | 6 |
| 1.8 | STATUS OF OTHER STATUTORY ENVIRONMENTAL REQUIREMENTS | 6 |
| 2 | EM&A RESULTS | 8 |
| 2.1 | Air Quality Monitoring | 8 |
| 2.2 | Noise Monitoring | 10 |
| 2.3 | Surface Water Quality Monitoring | 12 |
| 2.4 | LANDSCAPE AND VISUAL MONITORING | 14 |
| 2.5 | EM&A SITE INSPECTION | 14 |
| 2.6 | Waste Management Status | 16 |
| 2.7 | IMPLEMENTATION STATUS OF ENVIRONMENTAL MITIGATION MEASURES | 17 |
| 2.8 | SUMMARY OF EXCEEDANCES OF THE ENVIRONMENTAL QUALITY PERFORMAN | NCE |
| | LIMIT | 17 |
| 2.9 | SUMMARY OF COMPLAINTS, NOTIFICATION OF SUMMONS AND SUCCESSFUL | |
| | Prosecutions | 17 |
| 3 | FUTURE KEY ISSUES | 18 |
| 3.1 | CONSTRUCTION PROGRAMME FOR THE COMING MONTH | 18 |
| 3.2 | KEY ISSUES FOR THE COMING MONTH | 18 |
| 3.3 | MONITORING SCHEDULE FOR THE COMING MONTH | 19 |
| 4 | CONCLUSION AND RECOMMENDATION | 20 |

ANNEXES

| ANNEX A | WORK PROGRAMME | |
|---------|----------------|--|
| | | |

ANNEX B ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

ANNEX C MONITORING SCHEDULE FOR THIS REPORTING PERIOD

ANNEX D AIR QUALITY

ANNEX D1 CALIBRATION CERTIFICATES FOR DUST MONITORING EQUIPMENT

ANNEX D2 24-HOUR TSP MONITORING RESULTS

ANNEX D3 EVENT AND ACTION PLAN FOR DUST MONITORING

ANNEX D4 METEOROLOGICAL DATA

ANNEX E NOISE

ANNEX E1 CALIBRATION CERTIFICATES FOR NOISE MONITORING EQUIPMENT

ANNEX E2 Noise Monitoring Results

ANNEX E3 EVENT AND ACTION PLAN FOR NOISE MONITORING

ANNEX F SURFACE WATER QUALITY

ANNEX F1 CALIBRATION CERTIFICATES FOR SURFACE WATER QUALITY MONITORING EQUIPMENT

ANNEX F2 SURFACE WATER QUALITY MONITORING RESULTS

ANNEX F3 EVENT AND ACTION PLAN FOR SURFACE WATER QUALITY MONITORING

ANNEX F4 INVESTIGATION REPORTS OF ENVIRONMENTAL QUALITY LIMIT EXCEEDANCE

ANNEX G CUMULATIVE STATISTICS ON EXCEEDANCES, ENVIRONMENTAL COMPLAINTS, NOTIFICATION OF SUMMONS AND STATUS OF PROSECUTIONS

ANNEX H MONITORING SCHEDULE FOR THE NEXT REPORTING PERIOD

EXECUTIVE SUMMARY

The SENT Landfill Extension (SENTX) forms an integral part in the Strategic Plan in maintaining the continuity of landfill capacity in the Hong Kong for the cost-effective and environmentally satisfactory disposal of waste. ERM-Hong Kong, Limited (ERM) is commissioned to undertake the role of Environmental Team (ET) for the construction, operation/restoration and aftercare of SENTX Project ("the Project") in accordance with the requirements specified in the Environmental Permit (EP), updated Environmental Monitoring and Audit (EM&A) Manual, the approved Environmental Impact Assessment (EIA) Report of the Project taking account of the latest design and other relevant statutory requirements. The construction (not including works related to site clearance and preparation) of the Project commenced on 2 January 2019.

This Monthly EM&A report presents the EM&A works carried out during the period from 1 to 31 October 2020 for the Project in accordance with the updated EM&A Manual.

Exceedance of Action and Limit Levels for Air Quality

No exceedance of Action and Limit Levels for construction air quality monitoring was recorded in the reporting period.

Exceedance of Action and Limit Levels for Noise

No exceedance of Action and Limit Levels for construction noise monitoring was recorded in the reporting period.

Exceedance of Action and Limit Levels for Surface Water Quality

One exceedance of the Limit Level for suspended solids (SS) was recorded for surface water quality impact monitoring in the reporting period. The SS exceedance at DP6 on 15 October 2020 was found deemed to Project-related activities.

Environmental Complaints, Summons and Prosecutions

There were no complaints, notification of summons or prosecution recorded in the reporting period.

Reporting Change

There was no reporting change in the reporting period.

Future Key Issues

Potential environmental impacts arising from the upcoming construction activities in the next reporting period of November 2020 are mainly associated with dust emission from the exposed area and loading and unloading operation of dusty materials.

1 INTRODUCTION

1.1 BACKGROUND

The SENT Landfill Extension (SENTX) forms an integral part in the Strategic Plan in maintaining the continuity of landfill capacity in the Hong Kong for the cost-effective and environmentally satisfactory disposal of waste. The *Environmental Impact Assessment (EIA) Report* and the associated *Environmental Monitoring and Audit (EM&A) Manual* for the construction, operation, restoration and aftercare of the SENTX (hereafter referred to as "the Project") have been approved under the *Environmental Impact Assessment Ordinance (EIAO)* in May 2008 (Register No.: AEIAR-117/2008) (hereafter referred to as the approved EIA Report) and an Environmental Permit (EP-308/2008) (EP) was granted by the Director of Environmental Protection (DEP) on 5 August 2008.

Since then, applications for Variation of an Environmental Permit (No. VEP-531/2017) were submitted to EPD and the Variation of Environmental Permits (EP-308/2008/A and EP-308/2008/B) were granted on 6 January 2012 and 20 January 2017, respectively, as the Hong Kong SAR Government has decided to reduce the scale of the design scheme of SENTX assessed in the approved EIA Report and SENTX will only receive construction waste. In May 2018, a Further Environmental Permit (FEP) (FEP-01/308/2008/B) was granted to the SENTX's contractor, Green Valley Landfill, Limited (GVL).


ERM-Hong Kong, Limited (ERM) and Meinhardt Infrastructure and Environment Limited (Meinhardt) are commissioned to undertake the roles of Environmental Team (ET) and the Independent Environmental Checker (IEC), respectively, to undertake the EM&A activities for the Project in accordance with the requirements specified in the EP, updated EM&A Manual (1), approved EIA Report (2) taking account of the latest design and other relevant statutory requirements.

1.2 PROJECT DESCRIPTION

The SENTX is a piggyback landfill, occupying the southern part of the existing SENT Landfill (including its infrastructure area) and 13 ha of Tseung Kwan O (TKO) Area 137. A layout plan of the SENTX is shown in *Figure 1.1*. Under the latest design, the SENTX has a net void capacity of about 6.5 Mm³ and provides an additional lifespan of about 6 years, commencing operation upon exhaustion of the SENT Landfill. The SENTX will receive construction waste only.

⁽¹⁾ ERM (2018). South East New Territories (SENT) Landfill Extension: Environmental Monitoring & Audit Manual

⁽²⁾ ERM (2007). South East New Territories (SENT) Landfill Extension – Feasibility Study: Environmental Impact Assessment Report

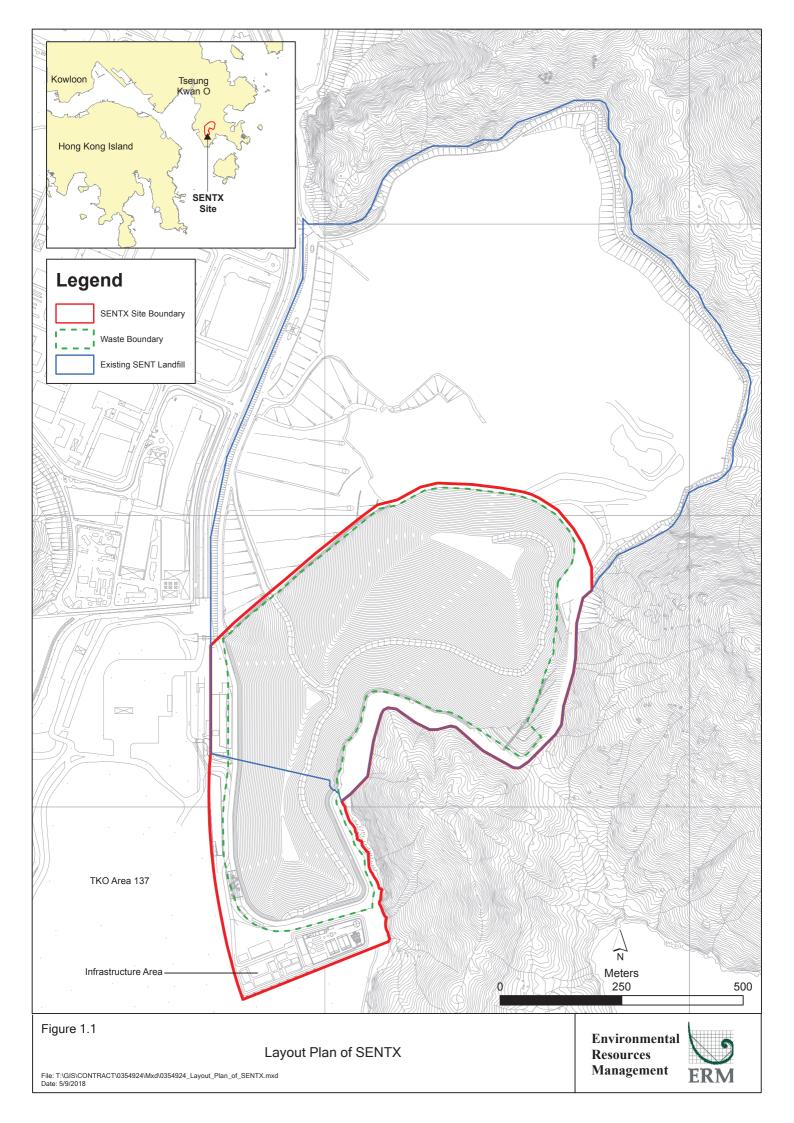

The key implementation milestones of the Project are indicatively summarised in *Table 1.1*. The construction works of the Project commenced on 2 January 2019.

 Table 1.1
 Estimated Key Dates of Implementation Programme

| Key Stage of the Project | Indicative Date |
|--|--|
| Start construction | 2 January 2019 |
| Commissioning of new infrastructure facilities | 2020 |
| Demolition of existing infrastructure facilities | 2021 |
| Start waste intake at SENTX | 2021 or upon exhaustion of SENT Landfill |
| Estimated exhaustion date of SENTX | 2027 |
| End of aftercare for SENTX | 2057 |

The major construction works of the SENTX includes:

- Site formation at the TKO Area 137 and the existing infrastructure area at SENT Landfill;
- Construction of surface and groundwater drainage systems;
- Construction of the leachate containment and collection systems;
- Construction of new leachate and landfill gas treatment facilities, site offices, maintenance yards at the new infrastructure area;
- Construction of new pipelines to transfer the leachate and landfill gas collected from the existing SENT Landfill to the treatment facilities at the new infrastructure area;
- Construction of the site access and new waste reception facilities; and
- Demolition of the facilities at the existing SENT Landfill infrastructure area.


1.3 Scope of the EM&A Report

This is the Monthly EM&A Report for the Project which summarises the key findings of the EM&A programme during the reporting period from 1 to 31 October 2020 for the construction works.

1.4 PROJECT ORGANISATION

The organisation structure of the Project is presented in *Figure* 1.2.

Figure 1.2 Organisation Chart

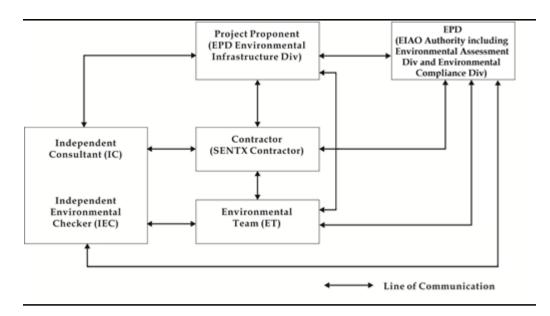

Contact details of the key personnel are summarised in *Table 1.2* below.

Table 1.2 Contact Information of Key Personnel

| Party | Position | Name | Telephone |
|---|-----------------|----------------|-----------|
| Contractor | Project Manager | Gary Barnicott | 2706 8827 |
| (Green Valley Landfill | | | |
| Limited) | | | |
| Environmental Team (ET) | ET Leader | Frank Wan | 2271 3152 |
| (ERM-Hong Kong, Limited) | | | |
| Independent Environmental Checker (IEC) (Meinhardt Infrastructure | IEC | W.K. Chiu | 2859 1881 |
| (Meinhardt Infrastructure and Environment Limited) | | | |

1.5 SUMMARY OF CONSTRUCTION WORKS

The programme of the construction is shown in *Annex A*. As informed by the Contractor, the major works carried out in this reporting period include:

- Electro-mechanical installation at landfill gas (LFG) plant;
- Dry testing at LFG plant;
- Installation of cables and cable containment at Leachate Treatment Plant (LTP) area;
- Electro-mechanical installation (including pipe) at LTP area;
- Dry testing at LTP;

- Building services works and fitting-out works for infrastructure buildings (EPD building, GVL building and laboratory building);
- Construction of superstructure of fire service tank room and water service room;
- Construction of pits and ducting for underground utilities;
- Installation of diesel fuel tanks;
- Sewerage system works for infrastructure buildings;
- Water main pipe installation for infrastructure buildings;
- Construction of perimeter bund channel;
- Equipment installation at sump house 1 and 2;
- Structure work for sump house 3;
- Surface channel works at buttress wall;
- Maintenance and improvement of temporary surface water drainage;
- Filling work at the transition area between buttress wall and Cell 2X and at West of Cell 3X;
- Construction of Cell 3X formation;
- Construction of footing of vehicle washing facilities, weighbridge and guard house;
- Underground utilities and pipes installation at waste reception area;
- Installation of HDPE pipes for leachate collection system;
- Installation of water mains and telecom pipes;
- Sewerage system works at waste reception area; and
- Civil provision works (draw pits and ducts laying) for Extra-low voltage (ELV) and low voltage (LV) cables.

The implementation schedule of the mitigation measured recommended in the Updated EM&A Manual is presented in *Annex B*.

1.6 SUMMARY OF EM&A PROGRAMME REQUIREMENTS

The status for all environmental aspects are presented in *Table 1.3*. The EM&A requirements remained unchanged during the reporting period.

Table 1.3 Summary of Status for the Environmental Aspects under the Updated EM&A Manual

| Status |
|--|
| |
| The results of baseline air quality monitoring were reported in Baseline Monitoring Report and submitted to EPD under EP Condition 3.3 |
| On-going On-going |
| |
| The results of baseline noise monitoring were reported in Baseline Monitoring Report and submitted to EPD under EP Condition 3.3 |
| On-going |
| On-going |
| The results of baseline surface water quality monitoring were reported in Baseline Monitoring Report and submitted to EPD under EP Condition 3.3 |
| On-going |
| |
| On-going |
| |
| The results of baseline landscape and visual monitoring were reported in Baseline Monitoring Report and submitted to EPD under EP Condition 3.3 |
| On-going |
| |
| On-going |
| On-going |
| |
| On-going |
| |
| Commenced on 24 March 2020 |
| |
| |
| Commenced on 24 March 2020 |
| |
| I_2S |
| Commenced on 27 May 2020 |
| |

Taking into account the construction works, impact monitoring of air quality, noise, surface water quality and waste management were carried out in the reporting period. The impact monitoring schedule of air quality, noise and surface water quality monitoring are provided in *Annex C*. Groundwater and landfill gas pre-operation baseline monitoring and ambient VOCs, ammonia and H2S pre-operation baseline monitoring were commenced on 24 March 2020 and 27 May 2020 respectively.

The EM&A programme also involved environmental site inspections and related auditing conducted by the ET for checking the implementation of the required environmental mitigation measures recommended in the approved EIA Report and relevant EP submissions. To promote the environmental awareness and enhance the environmental performance of the contractors,

environmental trainings and regular environmental management meetings were conducted during the reporting period, which are summarised as below:

- One environmental management meeting was held with the Contractor, ER, ET, IEC and EPD on 22 October 2020; and
- Environmental toolbox trainings on Chemical Waste Handling and Dark Smoke were provided on 6 October and 20 October 2020 respectively by the Contractor to the workers.

1.7 STATUS OF STATUTORY ENVIRONMENTAL COMPLIANCE WITH THE ENVIRONMENTAL PERMIT

The status of statutory environmental compliance with the EP conditions under the EIAO, submission status under the EP and implementation status of mitigation measures are presented in *Table 1.4*.

Table 1.4 Status of Submissions required under the EP and Implementation Status of Mitigation Measures

| EP Condition | Submission / Implementation Status | Status |
|-----------------|---|---|
| 2.3 | Management Organisation of Main Construction Companies | Submitted and accepted by EPD. |
| 2.4 | Setting up of Community Liaison Group | Community Liaison Group was set up. |
| 2.5 | Submission of Detailed Landfill Gas Hazard Assessment Report | Submitted and accepted by EPD on 10 January 2019. |
| 2.6 | Submission of Restoration and Ecological Enhancement Plan | Submitted to EPD on 28 June 2019. |
| 2.7 | Setting up of Trial Nursery | Trial Nursery works was commenced on 28 August 2019. |
| 2.8 | Advance Screen Planting | Advance Screen Planting works were completed on 28 June 2019. |
| 2.9 | Provision of Multi-layer Composite Liner System | Under implementation. |

1.8 STATUS OF OTHER STATUTORY ENVIRONMENTAL REQUIREMENTS

The environmental licenses and permits (including EP, *Water Pollution Control Ordinance* (WPCO) discharge license, registration as a chemical waste producer, and construction noise permit) that are valid in the reporting period are presented in *Table 1.5*. No non-compliance with environmental statutory requirements was identified.

Table 1.5 Status of Statutory Environmental Requirements

| Description | Ref No. | Status |
|-----------------------------------|-------------------|----------------------------|
| Environmental Permit | EP-308/2008 | Granted on 5 August 2008 |
| Variation of Environmental Permit | EP-308/2008/A | Granted on 6 January 2012 |
| | EP-308/2008/B | Granted on 20 January 2017 |
| Further Environmental Permit | FEP-01/308/2008/B | Granted on 16 May 2018 |

| Description | Ref No. | Status |
|-----------------------------------|--------------------------|------------------------------|
| Water Discharge License under | Licence No.: WT00033525- | Validity from 27 March |
| WPCO (Permit Holder: Chun Wo) | 2019 | 2019 to 31 March 2024 |
| Billing Account for Disposal of | Chit Account Number: | Approved on 28 December |
| Construction Waste | 5001692 | 2005 |
| Registration as a Chemical Waste | 5213-839-C3507-10 | Issued on 23 August 2018 |
| Producer (Permit Holder: Chun Wo) | | |
| Registration as a Chemical Waste | 5518-839-R2289-06 | Issued on 24 October 2019 |
| Producer (Permit Holder: REC) | | |
| Construction Noise Permit (Permit | GW-RE0075-20 | Validity from 1 September |
| Holder: GVL) | | 2020 to 28 February 2021 |
| Construction Noise Permit (Permit | GW-RE0516-20 | Validity from 17 June 2020 |
| Holder: Chun Wo) | | to 7 December 2020 |
| Construction Noise Permit (Permit | GW-RE0466-20 | Validity from 1 June 2020 to |
| Holder: REC) | | 31 October 2020 |

2 EM&A RESULTS

The EM&A programme for the Project required environmental monitoring for air quality, noise and surface water quality as well as environmental site inspections for air quality, noise, surface water quality, waste management, and landscape and visual impacts. The EM&A requirements and related findings for each component are summarised in the following sections.

2.1 AIR QUALITY MONITORING

2.1.1 Monitoring Requirements and Equipment

According to the updated EM&A Manual of the Project, impact air quality monitoring (dust, in term of Total Suspended Particulates (TSP)) was carried out at the two designated monitoring locations (i.e. DM1 and DM2) at a 6-day interval. As there are two existing TSP monitoring stations (i.e. TKO-A1 and TKO-A2a) currently operating by the Civil Engineering and Development Department (CEDD) to monitor the 24-hour TSP levels at the proposed dust monitoring stations for the SENTX, it is considered that the CEDD monitoring data can represent the dust condition of the SENTX during the construction phase.


The Action and Limit Levels of the air quality monitoring is provided in *Table* 2.1 below.

Table 2.1 Action and Limit Levels for 24-hour TSP

| Monitoring Station | Action Level | Limit Level |
|---|------------------------|------------------------|
| DM-1 - Site Egress of TKO Area 137 Fill Bank | 204 μg m- ³ | 260 μg m- ³ |
| DM-2A – Combined Reception and Exit Office (CREO) of TKO Area 137 Fill Bank | 193 μg m- ³ | 260 μg m- ³ |

High volume air samplers (HVSs) in compliance with the specifications listed under Section 3.2.2 of the updated EM&A Manual were used to measure 24-hour TSP levels at the CEDD dust monitoring stations. The HVSs were calibrated upon installation and thereafter at bi-monthly intervals to check the validity and accuracy of the results.

The equipment used in the impact air quality monitoring programme and monitoring locations are summarised in *Table 2.2* and illustrated in *Figure 2.1* respectively. Copies of the calibration certificates for the equipment are presented in *Annex D1*.

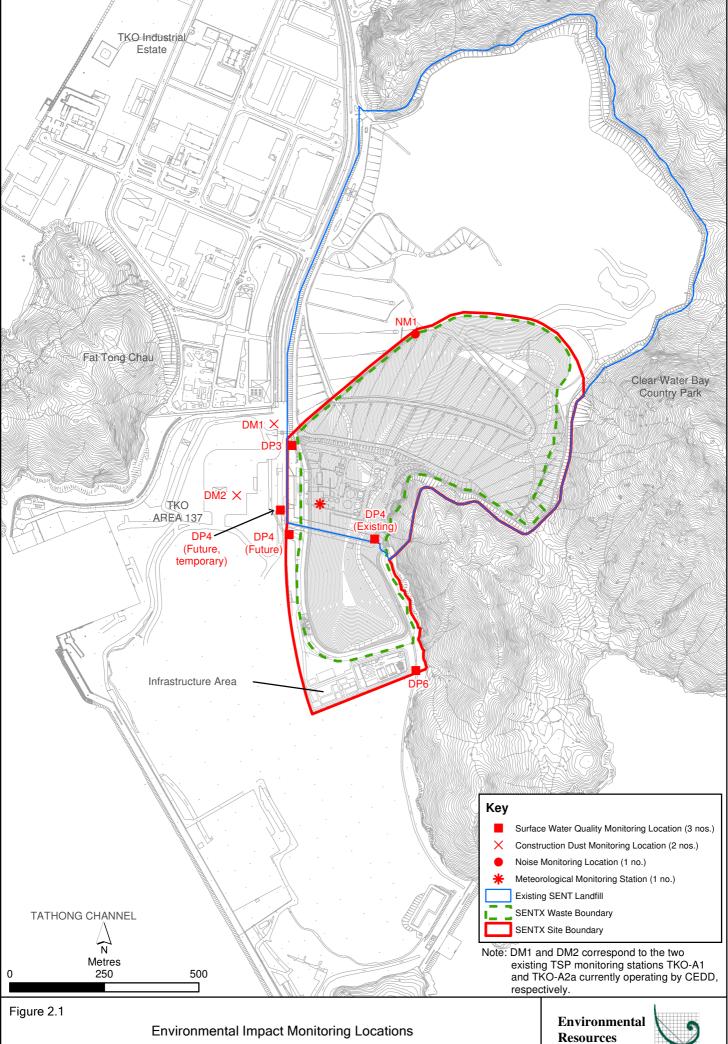

 $File: T. \\ IGIS/CONTRACT/0465169 \\ Imxd/0465169 \\ Environmental_Impact_Monitoring_Locations. \\ mxd/Date: 28/5/2019$

Management



Table 2.2 Dust Monitoring Details

| Monitoring Station | Location | Parameter | Frequency and Duration | Monitoring Dates | Equipment |
|-----------------------|---|----------------|---|-------------------------------------|---|
| DM1 | Site Egress of TKO Area 137 Fill Bank | 24-hour TSP | Once every 6 days during the construction | 1,7,13,19,25, 31 October 2020 | HVS Greasby 105 (S/N: 9795 (ET/EA/003/18)) |
| DM2 | Combined Reception and Exit Office (CREO) of TKO Area 137 Fill Bank | | phase of the Project | | HVS Andersen G1051 (S/N: 1176 (ET/EA/003/05)) |

2.1.2 Monitoring Schedule for the Reporting Month

The schedule for air quality monitoring during the reporting period is provided in *Annex C*.

2.1.3 Results and Observations

The monitoring results for 24-hour TSP are summarised in *Table 2.3*. The detailed monitoring results and the graphical presentation of the 24-hour TSP results at each monitoring location are provided in *Annex D2*.

Table 2.3 Summary of 24-hour TSP Monitoring Results in the Reporting Period

| Monitoring Station | Average 24-hr TSP Concentration (µg m ⁻³) (Range in bracket) | Action Level (µg/m³) | Limit Level (µg/m³) |
|---|--|-------------------------|------------------------|
| DM-1 – Site Egress of TKO Area 137 Fill Bank | 108 (95 - 114) | 204 | 260 |
| DM-2A – Combined Reception and Exit Office (CREO) of TKO Area 137 Fill Bank | 100 (84 - 115) | 193 | 260 |

The major dust sources in the reporting period included fugitive dust emission from exposed area in SENTX, as well as nearby operations of the existing SENT landfill and the TKO Area 137 Fill Bank.

All the 24-hour TSP results were below the Action and Limit Levels at the monitoring locations in the reporting period. No action is thus required to be undertaken in accordance with the Event and Action Plan presented in *Annex D3*.

2.1.4 Meteorological Data

Meteorological data obtained from the on-site meteorological monitoring station at the existing SENT landfill (see *Figure 2.1*) were used for the dust monitoring and are shown in *Annex D4*. The meteorological station will be relocated to a new position for SENTX as per the updated EM&A Manual after the new infrastructure area at the SENTX is constructed. It is

considered that meteorological data obtained at the existing the on-site meteorological monitoring station are representative of the Project area and could be used for the construction phase dust monitoring programme for the Project.

2.2 Noise Monitoring

2.2.1 Monitoring Requirements and Equipment

According to the updated EM&A Manual of the Project, impact noise monitoring was conducted weekly at the monitoring location (i.e. NM1) to obtain one set of 30 minutes measurement between 07:00 and 19:00 hours on normal weekdays.

The Action and Limit Levels for construction noise of the Project are provided in *Table 2.4* below.

Table 2.4 Action and Limit Levels for Construction Noise

| Time Period | Action Level (a) | Limit Level (b) |
|---|--|------------------|
| 07:00 – 19:00 hrs on normal weekdays | When one documented complaint is received from any one of the noise sensitive receivers (NSRs) | 75 dB(A) at NSRs |
| | or | |
| | 75 dB(A) recorded at the monitoring station | |

Notes:

- (a) 75dB(A) along and at about 100m from the SENTX site boundary was set as the Action Level.
- (b) Limits specified in the GW-TM and IND-TM for construction and operational noise, respectively.

Noise monitoring was performed by ALS Technichem (HK) Pty Ltd. (HOKLAS Registration No. 066) using sound level meter at the designated monitoring station NM1 (see *Figure* 2.1) in accordance with the requirements stipulated in the updated EM&A Manual. Acoustic calibrator was deployed to check the sound level meter at a known sound pressure level. Details of the deployed equipment are provided in *Table* 2.5. Copies of the calibration certificates for the equipment are presented in *Annex E1*.

Table 2.5 Noise Monitoring Details

| Monitoring Station (1) | Location | Parameter | Frequency and Duration | Monitoring Dates | Equipment |
|---------------------------|------------|-----------------------|----------------------------|---------------------|----------------------------------|
| NM1 | SENTX Site | Leq (30 min) | Once per | 7, 15, 21, 29 | Sound Level |
| | Boundary | measurement | week for 30 | October 2020 | Meter: |
| | (North) | between 07:00 | mins during | | B&K 2238 |
| | | and 19:00 hours | the | | (S/N: |
| | | on normal weekdays | construction period of the | | 2285722) |
| | | (Monday to | Project | | NL-52 (S/N: |
| | | Saturday) | , | | 00921191) |
| | | | | | Acoustic |
| | | | | | Calibrator: |
| | | | | | Rion NC-74 |
| | | | | | (S/N: |
| | | | | | 34657230) |
| | | | | | Rion NC-73 (S/N: 10655561) |

2.2.2 Monitoring Schedule for the Reporting Month

The schedule for noise monitoring during the reporting period is provided in *Annex C*.

2.2.3 Results and Observations

A total of 4 impact noise monitoring events were scheduled during the reporting period. Results for noise monitoring are summarised in *Table 2.6*. The monitoring results and the graphical presentation of the data are provided in *Annex E2*.

Table 2.6 Summary of Construction Noise Monitoring Results in the Reporting Period

| Monitoring Station | Measu | ıred Noise Level Le | eq (30 min), dB(A) |
|--------------------|---------|---------------------|------------------------|
| | Average | Range | Action and Limit Level |
| NM1 | 53.1 | 51.1 - 55.8 | 75 |

Major noise sources identified during the noise monitoring included noise from operations of the existing SENT landfill and the TKO Area 137 Fill Bank, aircrafts and insects.

No Action and Limit Levels exceedance was recorded for construction noise monitoring in the reporting period. No action is thus required to be undertaken in accordance with the Event and Action Plan presented in *Annex E3*.

2.3 Surface Water Quality Monitoring

2.3.1 Monitoring Requirements and Equipment

According to the updated EM&A Manual of the Project, impact surface water quality monitoring were carried out at the three designated surface water discharge points (i.e. DP3, DP4 and DP6) weekly to ensure that the SENTX will not cause adverse water quality impact. Temporary relocation of surface water discharge point DP4 to DP4 (Future, temporary) as an interim arrangement due to site constraints and construction sequence was approved by EPD on 14 May 2019. Surface water quality monitoring was carried out at DP4 (Future, temporary) (i.e. DP4T) from the monitoring event on 16 May 2019. In addition, suspension of impact surface water quality monitoring at DP3 was approved under the Baseline Monitoring Report by EPD on 24 July 2019 until the actual commencement of construction works affecting DP3 in 2021.

Dissolved Oxygen (DO) and pH value were measured in-situ whereas the level of suspended solids (SS) were determined by ALS Technichem (HK) Pty Ltd. (HOKLAS Registration No. 066).

The Action and Limit Levels of the surface water quality impact monitoring are provided in *Table 2.7*.

Table 2.7 Action and Limit Levels for Surface Water Quality

| Parameters | Action Level | Limit Level | |
|------------|------------------------|-------------|--|
| | DP4 & DP6 | | |
| DO | < 5.80 mg/L | < 5.42 mg/L | |
| SS | $> 11.7 \mathrm{mg/L}$ | > 12.7 mg/L | |
| pН | > 8.39 | > 8.40 | |

The locations of the monitoring stations for the Project are shown in *Figure 2.1*. All *in situ* monitoring instruments were checked, calibrated and certified by a laboratory accredited under HOKLAS or other international accreditation scheme before use, and subsequently re-calibrated at 3 monthly intervals throughout all stages of the surface water quality monitoring programme. Calibration for a DO meter was carried out before measurement according to the instruction manual of the equipment model. Details of the equipment used in the impact surface water quality monitoring works are provided in *Table 2.8*. Copies of the calibration certificates for the equipment are presented in *Annex F1*.

Table 2.8 Impact Surface Water Quality Monitoring Details

| Monitoring Station | Location | Frequency | Monitoring Dates | Parameter | Equipment |
|-------------------------------|---|-----------|-------------------------------|------------|---|
| DP4 (Future, temporary) | Surface water discharge point DP4 | Weekly | 7, 15, 21, 29 October 2020 | •pH •DO | YSI Professional DSS (S/N: 17B102764) pH Meter AZ8685 |
| DP6 | Surface water discharge point DP6 | - | | •SS | (S/N:1259868) |

Notes:

- (a) DP4 was temporary relocated to DP4 (Future, temporary) (i.e. DP4T) as an interim discharge point from the monitoring event on 16 May 2019.
- (b) Impact surface water quality monitoring at DP3 was suspended from the monitoring event on 25 July 2019 until the actual commencement of construction works affecting DP3 in 2021.

2.3.2 Monitoring Schedule for the Reporting Month

The schedule for surface water quality monitoring during the reporting period is provided in *Annex C*.

2.3.3 Results and Observations

A total of 4 monitoring events for impact surface water quality monitoring were scheduled at all designated monitoring stations during the reporting period. However, sampling could not be carried out on 7, 21 and 29 October 2020 at all monitoring locations and on 15 October 2020 at DP4 (Future, temporary) due to insufficient flow. Impact water quality monitoring results and graphical presentations are provided in *Annex F2*.

Action and Limit Level exceedance was recorded for surface water quality impact monitoring in the reporting period and actions in accordance with the Event and Action Plan presented in *Annex F3* were undertaken. Investigations of the Action and Limit Levels exceedance is conducted and summarized in *Table 2.9* below. Investigation report of the exceedance is presented in *Annex F4*.

Table 2.9 Details of Exceedances Recorded for Surface Water Quality Monitoring

| Date | Monitoring Location | Parameter | Type of Exceedance | Remarks | |
|-----------------|------------------------|-----------|--------------------|-----------------|--|
| 15 October 2020 | DP6 | SS | Limit Level | Project-related | |

Based on the investigation conducted for the monitoring event with potential Action and Limit Levels exceedances with the Contractor, and the IEC, the SS exceedance at DP6 on 15 October 2020 was found deemed to Project-related activities. The Contractor was reminded to implement all relevant mitigation measures for the construction works and maintain good site practice. The ET will keep track on the monitoring data and ensure Contractor's compliance of the environmental requirements.

2.4 LANDSCAPE AND VISUAL MONITORING

2.4.1 Monitoring Requirements

According to the updated EM&A Manual of the Project, the monthly landscape and visual audit was conducted on 21 October 2020 to monitor the implementation of the landscape and visual mitigation measures during construction phase.

All relevant environmental mitigation measures listed in the approved EIA Report and the updated EM&A Manual and their implementation status are summarised in *Annex B*.

2.4.2 Results and Observations

The Contractor has implemented environmental mitigation measures as stated in the approved EIA Report and the EM&A Manual.

Regarding the landscape and visual audit, the Contractor was reminded to maintain the advance screen planting works as soon as possible to ensure effective screening of views of project works from the High Junk Peak Trail. The Contractor shall consider the mitigation measures during the design phase, including the preparation of the Construction Drawings and Detailed Landscape Design Drawings.

2.5 EM&A SITE INSPECTION

Site inspections were carried out on a weekly basis with the Contractor, IEC and ER to monitor the implementation of proper environmental pollution control and mitigation measures for air quality, noise, surface water quality and waste management under the Project. In the reporting period, 4 site inspections were carried out on 8, 15, 22 and 29 October 2020.

Key observations during the site inspections are summarised in *Table 2.10*.

Table 2.10 Key Observations Identified during the Site Inspection in this Reporting Month

| Inspection Date | Environmental Observations and Recommendations |
|-----------------|--|
| 8 October 2020 | • The Contractor shall replace the faded NRMM label displayed on the crane near future LFG plant. |
| | The Contractor shall replace the lock of the chemical waste |
| | cabinet and ensure the cabinet is locked at all times. |
| | The Contractor shall provide drip tray for the chemical stored near site entrance. |
| | The Contractor shall clean up the chemical spillage near future |
| | GVL building and treat the clean-up materials as chemical waste. |
| | The Contractor shall avoid accumulation of stagnant water near |
| | future weighbridge, GVL building, maintenance building and LTP. |
| | The Contractor shall remove the general refuse near future water services house and dispose of the waste accumulated on site |
| 15.0 . 1 2020 | regularly. |
| 15 October 2020 | The Contractor shall clean up the oil spillage near the generator at transition area and treat the clean-up materials as chemical |
| | waste. |
| | The Contractor shall replace the faded NRMM label displayed on |
| | the generator near transition area. |
| | • The Contractor shall provide drip tray for the chemicals stored at future GVL building. |
| | The Contractor shall avoid accumulation of stagnant water near transition area, around sediment tray, near future weighbridge |
| | and future vehicle washing facilities. |
| | The Contractor shall remove the general refuse accumulated near |
| | future weighbridge, LTP and inside the water barriers at LFG |
| 22 October 2020 | plant and dispose of the waste regularly. The Contractor shall remove the general refuse accumulated at |
| 22 October 2020 | the temporary drain along Southern site boundary and dispose |
| | of the waste regularly. |
| | The Contractor shall provide drip tray for the chemical stored at future EPD building. |
| 29 October 2020 | The Contractor shall replace the faded NRMM label displayed on |
| | the generator near DP4T. |
| | The Contractor shall clean up the oil spillage near site entrance |
| | and at the generator near DP4T and treat the clean-up materials |
| | as chemical waste. |
| | The Contractor shall maintain the drip trays of the chemicals Output Description: |
| | stored at the Wetsep near DP4T and provide drip tray for chemical stored at future GVL building. |
| | The Contractor shall remove the stagnant water accumulated in the drip tray near DP6 and treat the clean-up materials as chemical waste. |
| | The Contractor shall avoid accumulation of stagnant water at |
| | LTP area and spray larvicides for mosquito control. |
| | The Contractor shall remove the general refuse accumulated near future bioplant building, LTP and at the drains around LTP and |
| | dispose of the waste regularly. |

The Contractor has rectified all of the observations identified during environmental site inspections in the reporting period. Key environmental deficiencies identified and the corresponding rectification actions are presented in *Table 2.11*.

Table 2.11 Summary of Environmental Deficiencies Identified and Corresponding Rectification Actions

| Deficiencies | Rectifications Implemented | Proposed Additional Control Measures |
|---|---|---|
| Surface Water | | |
| Intercepting channels & drainage system | Reviewed drainage plan. | Addition of channels. Expedite the construction of permanent sediment trap and discharge culverts. |
| DP channels (design & regular silt removal) | Carried out regular maintenance and cleaning of channels. DP4 channel: Area near the channel was paved with concrete and a bund was built. DP6 channel: Gravel piles on the channel were covered with concrete which serve as blocks for running water and to divide the channel into several sections. A pump was placed in the water zone in the upstream section to pump water to the Wetsep for treatment prior to the discharge to the last section before the weir plate. DP6: Pipes through the gravel piles between different channel sections were covered with geotextiles to block debris and silt. | N.A. |
| Stockpiles & exposed soil | Installed silt fencing near surface water channel along DP6 channel. | Improve soil covering.Compaction and cover for stockpiles and soil slopes. |
| Wetsep (treatment capacity & number) | Reviewed Wetsep capacity. Chemicals dosage of the Wetsep was increased to enhance the efficiency. | • Install additional Wetsep. |
| Backflow / ponding during heavy rainfall | Raised with EPD (LDG) and CEDD. | N.A. |

2.6 WASTE MANAGEMENT STATUS

The Contractor has registered as chemical waste producer under the Contract. Sufficient numbers of receptacles were available for general refuse collection and sorting.

As informed by the Contractor, waste generated during this reporting period include mainly inert C&D materials. Reference has been made to the waste flow table prepared by the Contractor. The quantities of different types of wastes and imported fill materials are summarised in *Table 2.12*.

Table 2.12 Quantities of Different Waste Generated and Imported Fill Materials

| Month/ | Inert | Impor | rted Fill | Inert | Non-inert | Recyclable | Chemical |
|----------------------------|---------|---------|------------------------------|--|--|------------------------------|-----------------------|
| Year C&D Materials (a) (in | | (in '00 | 00kg) ^(b) Soil | Construction Waste Re- used (in '000m³) | Construction Waste (c) (in '000m³) | Materials (d) (in '000kg) | Wastes (in '000kg) |
| | '000m³) | | | | | | |
| 1 - 31 Oct 2020 | 2.641 | 0 | 10890.45 | 0 | 0.143 | 0 | 0 |

Notes:

- (a) Inert construction wastes include hard rock and large broken concrete, and materials disposed as public fill. Density assumption: 1.6 (kg/L) for public fill.
- (b) Imported fill refers to materials generated from other project for on-site reuse.
- (c) Non-inert construction wastes include general refuse disposed at landfill. Density assumption: 0.9 (kg/L) for general refuse.
- (d) Recyclable materials include metals, paper, cardboard, plastics and others.

2.7 IMPLEMENTATION STATUS OF ENVIRONMENTAL MITIGATION MEASURES

A summary of the Environmental Mitigation Implementation Schedule is presented in *Annex B*. The necessary mitigation measures were implemented properly for the Project.

2.8 SUMMARY OF EXCEEDANCES OF THE ENVIRONMENTAL QUALITY PERFORMANCE LIMIT

The 24-hour TSP monitoring results and construction noise monitoring results complied with the Action and Limit Levels in the reporting period. One exceedance of the Limit Level for suspended solids (SS) was recorded for surface water quality impact monitoring in the reporting period. The SS exceedance at DP6 on 15 October 2020 was found deemed to Project-related activities.

Cumulative statistics on exceedances is provided in *Annex G*.

2.9 SUMMARY OF COMPLAINTS, NOTIFICATION OF SUMMONS AND SUCCESSFUL PROSECUTIONS

There were no complaints, notification of summons or prosecution recorded in the reporting period.

Statistics on complaints, notifications of summons, successful prosecutions are summarised in *Annex G*.

3 FUTURE KEY ISSUES

3.1 CONSTRUCTION PROGRAMME FOR THE COMING MONTH

As informed by the Contractor, the major works for the Project in November 2020 will be:

- Excavation and removal of unsuitable fill materials;
- Filling of perimeter bund for Cell 3X;
- Construction of formation of Cell 3X;
- Construction of buttress wall with surface channel;
- Screeding works at LTP;
- Installation of pipes and electrical cables at LTP;
- Installation of pipes with draw pits and laying LV cables for infrastructure buildings;
- Building service and fitting-out works at infrastructure buildings;
- Pavement works at Part X1 area;
- Construction of perimeter bund channel and surface channel;
- Construction of superstructure at maintenance building;
- Construction of concrete pits, drainage, sewage and ducting for underground utilities (including ELV, water mains and telecom);
- Construction of superstructure of fire service tank room and water services room;
- Installation of gas and leachate HDPE pipes;
- Installation of equipment at sump house 1 and 2;
- Construction of diesel fuel tank;
- Construction of Mechanically Stabilized Earth (MSE) wall;
- Demolition of SENT infrastructure area;
- Construction of waste reception area, including weighbridge, vehicle washing facilities and guard house; and
- Trees transplant and tree felling at Part X3.

3.2 KEY ISSUES FOR THE COMING MONTH

Potential environmental impacts arising from the above upcoming construction activities in the next reporting period of November 2020 are mainly associated with dust emission from the exposed area and loading and unloading operation of dusty materials. The ET will keep track on the construction works to confirm compliance of environmental requirements and the proper implementation of all necessary mitigation measures.

3.3 MONITORING SCHEDULE FOR THE COMING MONTH

The tentative schedules for environmental monitoring in November 2020 are provided in *Annex H*.

4 CONCLUSION AND RECOMMENDATION

This EM&A Report presents the findings of the EM&A activities undertaken during the period from 1 to 31 October 2020 in accordance with the updated EM&A Manual and the requirements of the Environmental Permit (*EP*-308/2008/B).

Air quality (24-hour TSP), noise and water quality (DO, pH and SS) monitoring were carried out in the reporting period. Results for air quality monitoring (24-hour TSP) complied with the Action and Limit Levels in the reporting period. No Action and Limit Levels exceedances were recorded for construction noise monitoring. One exceedance of the Limit Level for suspended solids (SS) was recorded for surface water quality impact monitoring in the reporting period. The SS exceedance at DP6 on 15 October 2020 was found deemed to Project-related activities.


Environmental site inspections were carried out during the reporting period. Recommendations on remedial actions were given to the Contractor for the deficiencies identified during the site inspections.

There were no complaints, notification of summons or prosecution recorded in the reporting period.

The ET will keep track on the construction works to confirm compliance of environmental requirements and the proper implementation of all necessary mitigation measures.

Annex A

Work Programme

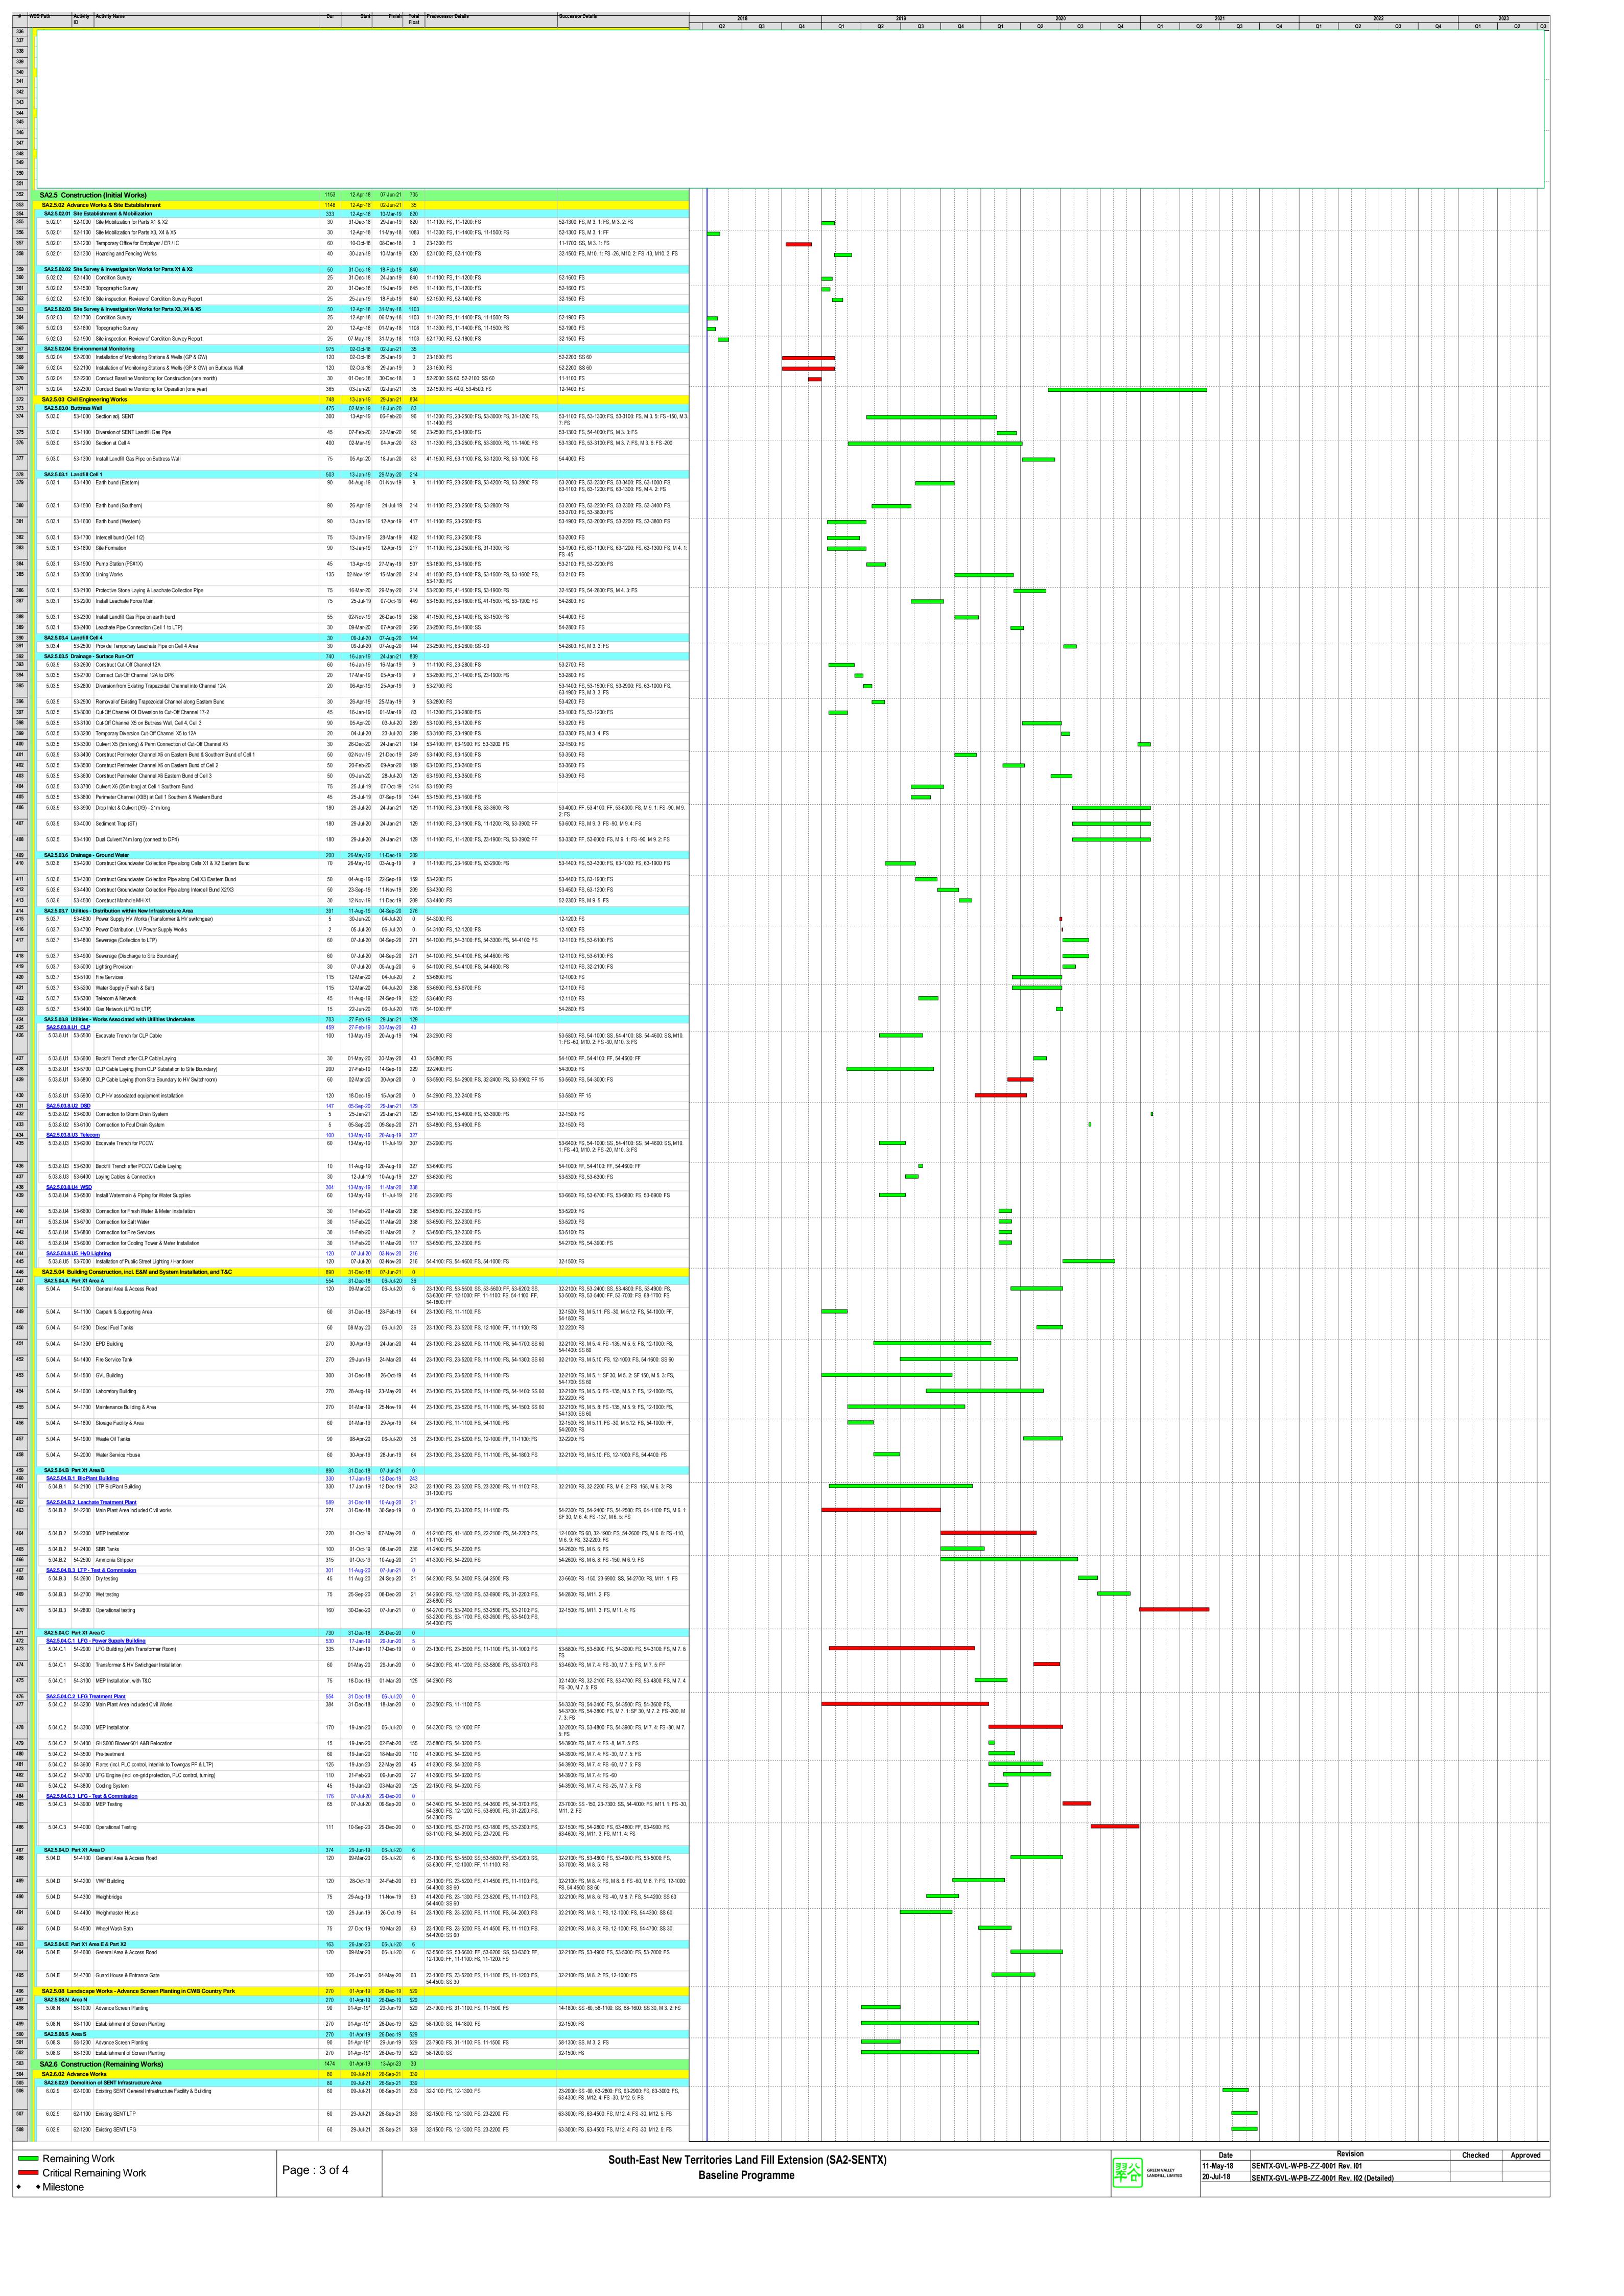

| 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 | SA2.6.00 SA2.6.00 6.03.2 6.03.2 | 6.03 Civ 6.03.2 La | ID . | Activity Name | | _ | | Total Predecessor Details | Successor Details |
|---|---|---------------------------|-------------------|--|-----|------------------|------------------------------|---|---|
| 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 | SA2.6.0 3 6.03.2 6.03.2 | 6.03.2 La | <i>ı</i> il Engir | | Dur | Sta | | Float | Successor Details |
| 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 | 6.03.2 | .2 | andfill C | ineering Works Cell 2 | | | 19 13-Apr-23 19 23-Jan-21 | | |
| 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 550 551 552 553 554 555 566 577 578 578 578 578 578 578 578 | 6.03.2 | | 63-1000 | Earth bund (Eastern) | | | | 9 11-1100: FS, 23-2500: FS, 53-4200: FS, 53-1400: FS 53-2800: FS | 53-3500: FS, 63-1500: FS, 63-1800: FS, 63-1900: FS, 63-2000: FS, 63-2100: FS, 63-2200: FS, M12. 1: FS -50, M12. |
| 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 550 551 552 553 554 555 566 577 578 578 578 578 578 578 578 | 6.03.2 | | | | | | | 55 25551.5 | 2: FS, 63-1100: FS |
| 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 | | 3.2 | 63-1100 | Earth bund (Western) | 110 | 20-Feb-7 | .0 08-Jun-20 | 84 11-1100: FS, 23-2500: FS, 53-1800: FS, 53-1400: FS | |
| 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 | | 5.2 | 63-1200 |) Intercell bund (Cell 2/3) | 90 | 09-Jun- | 20 06-Sep-20 | 63-1000: FS 734 11-1100: FS, 23-2500: FS, 53-1800: FS, 53-1400: FS | 63-3600: FS, 63-1200: FS 63-1500: FS |
| 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 566 | 6.03.2 | | | , | | | | 53-4400: FS, 63-1100: FS | |
| 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 | | 5.2 | 63-1300 |) Site Formation | /5 | 02-Nov-1 | 3 15-Jan-20 | 14 11-1100: FS, 23-2500: FS, 53-1800: FS, 53-1400: FS | 63-1400: FS, 63-4200: FS |
| 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 | | | | Pump Station (PS#2X) | | | | 84 63-1300: FS, 63-1100: FS | 63-1600: FS, 63-1700: FS |
| 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 | 6.03.2 | 5.2 | 63-1500 | D Lining Works | 90 | 01-Oct-20 | * 29-Dec-20 | 710 41-1500: FS, 63-1000: FS, 63-1100: FS, 63-1200: FS | 63-1600: FS, M12. 3: FS, 63-2400: FS |
| 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 | | | | Protective Stone Laying & Leachate Collection Pipe | 25 | 30-Dec-2 | .0 23-Jan-21 | 810 63-1500: FS, 41-1500: FS, 63-1400: FS | 32-1600: FS, M12. 3: FS |
| 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 550 551 | | | | O Install Leachate Force Main | | | | 84 63-1100: FS, 41-1500: FS, 63-1400: FS | 54-2800: FS, M12. 3: FS |
| 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 550 551 | | | | Install Landfill Gas Pipe on earth bund | | | | 168 41-1500: FS, 63-1000: FS | 54-4000: FS, M12. 3: FS |
| 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 550 551 | SA2.6.0 3 | | | Cell 3 Carth bund (Eastern) | | | 20 02-Feb-22 20 08-Jun-20 | 9 11-1100: FS, 53-4200: FS, 63-1000: FS, 53-4300: FS | |
| 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 | | | | . , | | | | 53-2800: FS, 63-4200: FS | FS -50, M12. 2: FS, 63-2000: FS -45, 63-2200: FS |
| 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 | 6.03.3 | 3.3 | 63-2000 | Earth bund (Western) | 110 | 25-Apr-′ | 20 12-Aug-20 | 19 11-1100: FS, 63-1000: FS, 63-1900: FS -45 | 63-2300: FS, 63-2400: FS, 63-2600: FS, 63-3700: FS, |
| 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 550 551 | 0.00.0 | | 00.0400 | | 405 | | 20 44 0 4 00 | 700 44 4400 50 00 4000 50 00 4000 50 00 0000 50 | 63-2100: FS -45 |
| 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 | 6.03.3 | 3.3 | 63-2100 | Intercell bund (Cell 3/4) | 105 | 29-Jun-2 |) 11-Oct-20 | 789 11-1100: FS, 63-1000: FS, 63-4200: FS, 63-2000: FS | -45 63-2400: FS |
| 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 | 6.03.3 | 3.3 | 63-2200 | Site Formation | 75 | 09-Jun-? | .0 22-Aug-20 | 9 11-1100: FS, 63-1000: FS, 63-1900: FS | 63-2300: FS |
| 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 | 6.03.3 | 3.3 | 63-2300 | Pump Station (PS#3X) | | | | 9 63-2200: FS, 63-2000: FS | 63-2500: FS, 63-2600: FS |
| 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 | 6.03.3 | 3.3 | 63-2400 | D Lining Works | 100 | 01-Oct-2* | * 08-Jan-22 | 435 41-1500: FS, 63-1900: FS, 63-2000: FS, 63-2100: FS, 63-1500: FS | 63-2500: FS, M12. 3: FS |
| 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 | 6.03.3 | 3.3 | 63-2500 | Protective Stone Laying & Leachate Collection Pipe | 25 | 09-Jan- | .2 02-Feb-22 | 435 63-2400: FS, 41-1500: FS, 63-2300: FS | 32-1700: FS, M12. 3: FS |
| 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 | 6.03.3 | 3.3 | 63-2600 | Install Leachate Force Main | 75 | 07-Oct-: | .0 20-Dec-20 | 9 63-2000: FS, 41-1500: FS, 63-2300: FS | 53-2500: SS -90, 54-2800: FS, M12. 3: FS |
| 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 | | | | Install Landfill Gas Pipe on earth bund | 35 | 09-Jun-2 | .0 13-Jul-20 | 58 41-1500: FS, 63-1900: FS | 54-4000: FS, M12. 3: FS |
| 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 | SA2.6.03 | | | Cell 4 Remaining Portion of Buttress Wall | | | 21 13-Apr-23 | 30 494 62-1000: FS | |
| 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 | | | | D Earth bund (Western) incl. MSE Wall | | | | 239 62-1000: FS | 63-3000: FS, 63-3100: FS, 63-3200: FS, 63-3400: FS, |
| 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 | 0.00.1 | | 00 2000 | Editi build (Noticin) inci. inci. | 120 | 0, 000 2 | o roun zz | 52 1000.10 | 63-3800: FS, 63-3900: FS, 63-4100: SS -90, M 9. 6: FS -60, M 9. 7: FS -30, M 9. 8: FS |
| 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 | | | | | | | | | W 9. 7. FG -50, W 9. 0. FG |
| 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 | 6.03.4 | 3.4 | 63-3000 |) Site Formation | 120 | 05-Jan <i>-2</i> | 2 04-May-22 | 239 62-1000: FS, 62-1100: FS, 62-1200: FS, 63-2900: FS, 63-4100: FS | 63-3100: FS |
| 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 | 6.03.4 | 5.4 | 63-3100 | Pump Station (PS#4X) | 45 | 05-May- | <u>√</u> 2 18-Jun-22 | 239 63-3000: FS, 63-2900: FS | 63-3300: FS, 63-3400: FS |
| 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 | | | | Lining Works | 135 | 01-Oct-2 | 2* 12-Feb-23 | 0 41-1500: FS, 63-2900: FS | 63-3300: FS, M12. 6: FS |
| 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 | 6.03.4 | 3.4 | 63-3300 | Protective Stone Laying & Leachate Collection Pipe | 60 | 13-Feb-/ | .3 13-Apr-23 | 0 41-1500: FS, 63-3200: FS, 63-3100: FS | 12-1900: FS, 32-1800: FS, M12. 6: FS |
| 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 | 6.03.4 | 3.4 | 63-3400 | Install Leachate Force Main & Remove Temporary Leachate Pipe | 30 | 19-Jun-∕ | .2 18-Jul-22 | 269 41-1500: FS, 63-2900: FS, 63-3100: FS | 12-1900: FS, 32-1800: FS, M12. 6: FS |
| 540 541 542 543 544 545 546 547 548 549 550 551 552 553 | | | | e - Surface Run-Off | | | 20 03-Feb-22 | | (0.000 =0 |
| 541 542 543 544 545 546 547 548 549 550 551 552 553 | | | | Perimeter Channel (X9A) at Cell 2 Western Bund | | | | 1054 63-1100: FS | 12-1900: FS |
| 542 543 544 545 546 547 548 549 550 551 552 553 | | | | Perimeter Channel (X10A) at Cell 2 Western Bund Perimeter Channel (X10A) at Cell 3 Western Bund | | | | 1029 63-1100: FS 964 63-2000: FS | 63-4000: FS 63-4000: FS |
| 543 544 545 546 547 548 549 550 551 552 553 | | | | Perimeter Channel (X10A) at Cell 3 Western Bund Perimeter Channel (X10A) at Cell 4 Western Bund | | | | 464 63-2900: FS | 63-4000: FS 63-4000: FS |
| 544 545 546 547 548 549 550 551 552 553 | | | | Perimeter Channel (X10C) at Cell 4 Western Bund | | | | 469 63-2900: FS | 63-4000: FS |
| 545 546 547 548 549 550 551 552 553 | | | | Connection to Existing DP3 | | | | 464 63-3900: FS, 63-3600: FS, 63-3700: FS, 63-3800: FS | |
| 546 547 548 549 550 551 552 553 | 0.00.5 | | 00.4400 | | 00 | 00.1 | 24 00 1 104 | 440, 00,0000, 00,00 | 20,000, 50 |
| 547 548 549 550 551 552 553 | | | | Remove Cut-Off Channel C-7 at bottom of Buttress Wall | | | | 419 63-2900: SS -90 | 63-3000: FS |
| 548 549 550 551 552 553 | | | | Temporary Channel (X7T) at SENT Infrastructure Area e - Ground Water | | | 20 14-Feb-20 21 30-Nov-21 | 14 63-1300: FS | 63-1900: FS, 63-2100: FS |
| 550 551 552 553 | | | _ | Construct Temporary Channel (TC-1), from MH-1 to Existing UC-825 | | | | 529 23-1900: FS, 11-1300: FS, 62-1000: FS | 63-4400: FS |
| 551 552 553 | 6.03.6 | 6.6 | 63-4400 | Divert GW at MH-1 to TC-1 | 5 | 27-Oct-7 | .1 31-Oct-21 | 529 63-4300: FS | 63-4500: FS, M 9. 9: FS |
| 552 553 | | | | Reconnection of GWCP across Cell 4 | | | | 529 62-1100: FS, 62-1200: FS, 63-4400: FS | 12-1900: FS |
| 553 | | | | - Works Associated with Utilities Undertakers | | | 20 27-Jul-21 | | |
| | | 3.8.U1 6 | | LFG Generator On-grid Testing | | | 20 27-Jul-21 20 27-Jun-21 | 655 32-2500: FS, 12-1200: FS, 54-4000: FS | 63-4700: FS |
| 007 | | | | LFG Generator On-grid Inspection & Verify | | | | 655 63-4600: FS | 12-1900: FS |
| | | 2.6.03.8.U | | | | | 08-Jan-21 | | 00.4000.50 |
| | | | | D Laying Gas Mains (from LFG to Town Gas PF) D Gas Meter Relocation & Connection at LFG | | | | 855 54-4000: FF 855 63-4800: FS, 54-4000: FS | 63-4900: FS 12-1900: FS |
| | | | | Gas Meter Relocation & Connection at LFG & E&M Works | | | 19 22-Jul-21 | · · | 12-1900. FO |
| 559 | SA2.6.0 | 6.04.C P | art X1 A | Area C | 661 | 01-Oct-1 | 19 22-Jul-21 | 660 | |
| 560 | SA2.6.0 | .6.04.C.0 | 2 LFG | Treatment Plant | 661 | 01-Oct-1 | 19 22-Jul-21 | 660 | 12 1000: EC |
| | | | | O GHS600 Blower 601 C Relocation O Absorption Chiller (Optional) | | | | 660 32-1500: FS 1231 54-2200: FS | 12-1900: FS 12-1900: FS |
| | | | | pe Works | | | 19 29-Dec-19 19 03-Dec-20 | | 12-1000.10 |
| 564 | SA2.6.0 | 6.08.1 SI | ENT Are | rea - Tree Removal & Transplanting | 240 | 01-Apr-1 | 19 26-Nov-19 | 1264 | |
| | - | | | Access trees condition and select for transplanting | | | | 1264 14-1300: FS | 68-1100: FS, 68-1200: FS, 68-1400: FS |
| | | | | Prepare new site to receive trees | | | | 1264 68-1000: FS | 68-1200: SS |
| | 6.08.1 | | | Transplant selected trees | | | | 1264 68-1000: FS, 68-1100: SS | 68-1300: FS |
| | 6.08.1 6.08.1 | | | Prune trees prior to removal from Cell 4 Tree Felling - Part X3 | | | | 1264 68-1200: FS 1384 23-8200: FS, 31-1600: FS, 68-1000: FS | 12-1900: FS 12-1900: FS |
| | 6.08.1 6.08.1 6.08.1 | | | Tree Felling - Part X3 Area - Trial Nursery & Tree Planting | | | 19 29-Jul-19 19 03-Dec-20 | | 12-1300. FS |
| | 6.08.1 6.08.1 6.08.1 6.08.1 | J.JU.K 0 | | Trial Nursery | | | | 1174 14-1800: FS, 58-1000: SS 30 | 12-1900: FS, M 3. 2: FS |
| 572 | 6.08.1 6.08.1 6.08.1 6.08.1 SA2.6.0 | | 00 1000 | Landscaping in New Infrastructure Area | 150 | 07-Jul- | 20 03 Dec 20 | 891 54-1000: FS, 23-7600: FS | 12-1900: FS |

Annex B

Environmental Mitigation Implementation Schedule

Annex B Environmental Mitigation Implementation Schedule

| EIA Ref. | EM&A Ref | Environmental Protection Measures/ Mitigation Measures | Objectives of the Recommended Measure & Main Concerns to address | Location of the Measures | Who to implement the measure? | When to in the measur D C | - | What requirements or standards for the measure to achieve? | Implementation Status and Remarks |
|-------------|-------------|--|---|--|-------------------------------|---------------------------------|---|---|--|
| Air Quali | ty - Cons | truction Phase | | | | | | | |
| 4.8.1 | AQ1 | Blasting The area within 30m of the blasting area will be wetted prior to blasting. Blasting will not be carried out when | To minimise potential dust nuisance | Blasting area and 30m of blasting area | SENTX Contractor | √ | | Air Pollution Control (Construction Dust) Regulations | Not applicable. Blasting is not required in the latest landfill design |
| | | the strong wind signal or tropical cyclone warning signal No. 3 or higher is hoisted, unless this is with the express prior permission of the Commissioner of Mines. | • | | | | | | |
| | | loose material and stones in the Site will be removed prior to the blast operation | | | | | | | |
| | | During blasting, blast nets, screens and other protective covers will be used to prevent the projection of flying fragments and material resulting from blasting | | | | | | | |
| 4.8.1 | AQ2 | Rock Drilling Watering will be carried out at the rock drilling activities to avoid fugitive dust emissions. | To minimise potential dust nuisance | Rock drilling area | SENTX Contractor | √ | | Air Pollution Control (Construction Dust) Regulations | Not applicable. Rock drilling is not required in the latest landfill design |
| (1) D=Desig | gn; C=Const | ruction; O/R=Operation/Restoration; A=Aftercare | | | | | | | |

| EIA Ref. | EM&A Ref | Environmental Protection Measures/ Mitigation Measures | Objectives of the Recommended | Location of the Measures | Who to implement | | | implement ure? (1) | What requirements or standards for the | Implementation Status and Remarks | |
|----------|-------------|---|---------------------------------------|-----------------------------|---------------------|---|---|-----------------------|--|--------------------------------------|--|
| | | | Measure & Main Concerns to address | | the measure? | D | С | O/R A | measure to achieve? | | |
| 4.8.1 | AQ3 | Site Access Road | To minimise potential | | SENTX | | ✓ | | Air Pollution Control | Reminder was given to | |
| | | The main haul road will be kept clear of dusty materials or sprayed with water. | dust nuisance | road | Contractor | | | | (Construction Dust) Regulations | the Contractor | |
| | | The main haul road will be paved | | | | | | | HKAQO and EIAO- TM Annex 4 | | |
| | | with aggregate or gravel. | | | | | | | | | |
| | | • Vehicle speed will be limited to 10kph. | | | | | | | | | |
| 4.8.1 | AQ4 | Stockpiling of Dusty Materials | To minimise potential dust nuisance | All construction works area | SENTX | | ✓ | | Air Pollution Control | Implemented | |
| | | • Any stockpile of dusty materials will be covered entirely by impervious | | | Contractor | | | | (Construction Dust) Regulations | | |
| | | sheeting or placed in an area sheltered on the top and three sides or sprayed with water so as to ensure that the entire surface is wet. | | | | | | | HKAQO and EIAO- TM Annex 4 | | |
| 4.8.1 | AQ5 | Loading, unloading or transfer of dusty materials | | All construction | SENTX Contractor | | ✓ | | Air Pollution Control (Construction Dust) | Implemented | |
| | | All dusty materials will be sprayed | | works area | | | | | Regulations | | |
| | | with water immediately prior to any loading, unloading or transfer operation so as to maintain the dusty material wet. | | | | | | | HKAQO and EIAO- TM Annex 4 | | |
| 4.8.1 | AQ6 | Site Boundary and Entrance | To minimise potential | • | | | ✓ | | Air Pollution Control | Not applicable | |
| | | Where a site boundary adjoins a road, street, service lane or other area | dust nuisance a | and entrance | Contractor | | | | (Construction Dust) Regulations | | |
| | | accessible to the public, hoarding of height not less than 2.4m from | | | | | | | HKAQO and EIAO- | | |

| EIA Ref. | EM&A Ref | Environmental Protection Measures/ Mitigation Measures | Objectives of the Recommended Measure & Main Concerns to address | Location of the Measures | Who to implement the measure? | the me | eası | implem ure? ⁽¹⁾ O/R | | What requirements or standards for the measure to achieve? | Implementation Status and Remarks |
|----------|-------------|--|---|-----------------------------------|-------------------------------|--------|------|--------------------------------------|--|--|--------------------------------------|
| | | ground level will be provided along the entire length of that portion of the site boundary except for the site entrance or exit. | | | | | | | | TM Annex 4 | |
| 4.8.1 | AQ7 | Excavation Works | To minimise potential dust nuisance | All construction works area | SENTX Contractor | • | / | | | Air Pollution Control (Construction Dust) | Not applicable |
| | | Working area of any excavation or earth moving operation will be sprayed with water immediately before, during and immediately after the operation so as to ensure that the entire surface is wet. | | | | | | | | Regulations HKAQO and EIAO- TM Annex 4 | |
| 4.8.1 | AQ8 | Building Demolition | | All construction works area | SENTX Contractor | ~ | / | | | Air Pollution Control | Not applicable |
| | | The area where the demolition works are planned to take place will be sprayed with water immediately prior to, during and immediately after the demolition activities. | | | | | | | | (Construction Dust) Regulations HKAQO and EIAO- TM Annex 4 | |
| | | Any dusty materials remaining after a stockpile is removed will be wetted with water and cleared from the surface of roads or street. | | | | | | | | | |
| 4.8.1 | AQ9 | Construction of the Superstructure of Building • Effective dust screens, sheeting or netting will be provided to enclose the scaffolding from the ground level up to the highest level of the scaffolding. | To minimise potential dust nuisance | All construction works area | SENTX Contractor | • | | | | Air Pollution Control (Construction Dust) Regulations HKAQO and EIAO- TM Annex 4 | Implemented |

| EIA Ref. | EM&A Ref | Environmental Protection Measures/ Mitigation Measures | Objectives of the Recommended Measure & Main Concerns to address | Location of the Measures | Who to implement the measure? | | imple: sure? ⁽¹⁾ O/R |) | What requirements or standards for the measure to achieve? | Implementation Status and Remarks |
|----------|-------------|--|---|--|-------------------------------|---|---------------------------------------|---|---|---|
| 4.8.1 | AQ10 | Should a stone crushing plant be needed on site, the control measures recommended in the <i>Best Practicable Means Requirement for Mineral Works</i> (<i>Stone Crushing Plants</i>) <i>BPM 11/1</i> should be implemented. | To minimise potential dust nuisance | Stone crushing plant/ construction phase | SENTX Contractor | ✓ | | | Best Practicable Means Requirement for Mineral Works (Stone Crushing Plants) BPM 11/1 | Not applicable. Stone crushing plant is not required in the latest landfill design |
| 4.8.1 | AQ11 | Good site practices such as regular maintenance and checking of the diesel powered mechanical equipment will be adopted to avoid any black smoke emissions and to minimize gaseous emissions. | To minimise potential dust nuisance | All construction works area | SENTX Contractor | ✓ | | | HKAQO and EIAO- TM Annex 4 | Implemented |
| 4.10.1 | AQ12 | Dust monitoring once every 6 days | Ensure the dust generated from the project meets the air quality requirement | At monitoring locations shown in <i>Figure 3.2a</i> | SENTX Contractor | ✓ | | | HKAQO and EIAO- TM Annex 4 | Implemented |
| 4.10.2 | AQ41 | Monitoring of ambient TSP once every 6 days | Ensure the dust emission from the project meets the dust requirement | At monitoring locations shown in Figure 11.3a | SENTX Contractor | ✓ | ✓ | | HKAQO and EIAO- TM Annex 4 | Implemented |
| 4.10.2 | AQ46 | Monitoring of meteorological station, continuously | Collect site specific meteorological data | At meteorologica l station shown in Figure 11.3a | SENTX Contractor | ✓ | ✓ | ✓ | - | Implemented |

| EIA Ref. | EM&A Ref | Environmental Protection Measures/ Mitigation Measures | Objectives of the Recommended | Location of the Measures | Who to implement | | | implei ure? ⁽¹⁾ | nent | What requirements or standards for the | Implementation Status and Remarks |
|----------|-------------|---|--|-----------------------------|---------------------|---|---|-------------------------------|------|---|--------------------------------------|
| | | | Measure & Main Concerns to address | | the measure? | D | С | O/R | A | measure to achieve? | |
| 5.7.1 | N1 | Adopt good site practice listed below: Only well-maintained plant will be operated on-site and plant should be | To minimise potential construction noise nuisance. | All construction works area | SENTX Contractor | | ✓ | | | Noise Control Ordinance (NCO) and EIAO-TM Annex 5 | Implemented |
| | | serviced regularly during the construction program; | | | | | | | | | |
| | | • Silencers or mufflers on construction equipment should be utilized and will be properly maintained during the construction program; | | | | | | | | | |
| | | • Mobile plant, if any, will be sited as far from NSRs as possible; | | | | | | | | | |
| | | Machines and plant (such as trucks) that may be in intermittent use will be shut down between work periods or should be throttled down to a minimum; | | | | | | | | | |
| | | Plant known to emit noise strongly in one direction will, wherever possible, be orientated so that the noise is directed away from the nearby NSRs; and | | | | | | | | | |
| | | Material stockpiles and other structures will be effectively utilised, wherever practicable, in screening noise from on-site construction activities. | | | | | | | | | |

| EIA Ref. | EM&A Ref | Environmental Protection Measures/ Mitigation Measures | Objectives of the Recommended | Location of the Measures | Who to implement | | | implement sure? (1) | What requirements or standards for the | Implementation Status and Remarks |
|-----------|-------------------|--|---|--|---------------------|---|---|------------------------|---|--------------------------------------|
| | TC1 | Trinigation tricusures | Measure & Main Concerns to address | the Measures | the measure? | D | С | O/R A | measure to achieve? | Status and Remarks |
| 5.8 | N2 | Weekly noise monitoring | Ensure noise generated from the project meets the criteria | At monitoring locations shown in Figure 6.4a | SENTX Contractor | | ✓ | | Noise Control Ordinance (NCO) and EIAO-TM Annex 5 | Implemented |
| Water Qua | ality - Co | nstruction Phase | | | | | | | | |
| 6.8.1 | WQ1 | Construction Runoff | | | | | | | | |
| | | • Exposed soil areas will be minimised | To minimise potential | | SENTX | | ✓ | | ProPECC PN 1/94 | Implemented |
| | | to reduce the contamination of runoff and erosion. | water quality impacts arising from the construction works | construction works area | Contractor | | | | EIAO-TM Annex 6 | |
| 6.8.1 | WQ2 | Perimeter channels will be | To minimise potential | | SENTX | ✓ | ✓ | | ProPECC PN 1/94 | Implemented |
| | | constructed in advance of site formation works and earthworks and intercepting channels will be provided | water quality impacts arising from the construction works | construction works area | Contractor | | | | Water Pollution Control Ordinance (WPCO) | |
| | | for example along the edge of excavation. | | | | | | | EIAO-TM Annex 6 | |
| 6.8.1 | WQ3 | Silt removal facilities, channels and | To minimise potential | | SENTX | | ✓ | | ProPECC PN 1/94 | Implemented |
| | | manholes will be maintained and the deposited silt and grit should be | water quality impacts arising from the | construction works area | Contractor | | | | WPCO | |
| | | removed regularly to ensure they are functioning properly at all times. | construction works | | | | | | EIAO-TM Annex 6 | |
| 6.8.1 | WQ4 | Temporary covers such as tarpaulin | To minimise potential | | SENTX | | ✓ | | ProPECC PN 1/94 | Implemented |
| | | will also be provided to minimise the generation of high SS runoff. | water quality impacts arising from the construction works | construction works area | Contractor | | | | WPCO | |
| 6.8.1 | WQ5 | The surface runoff contained any oil | To minimise potential | All | SENTX | | ✓ | | ProPECC PN 1/94 | Not applicable |

| EIA Ref. | EM&A Ref | Environmental Protection Measures/ Mitigation Measures | Objectives of the Recommended | Location of the Measures | Who to implement | | | impleme ure? ⁽¹⁾ | ent | What requirements or standards for the | Implementation Status and Remarks |
|----------|-------------|---|---|----------------------------|------------------|---|---|--------------------------------|-----|--|--|
| | | | Measure & Main Concerns to address | | the measure? | D | C | O/R | A | measure to achieve? | |
| | | and grease will pass through the oil interceptors. | water quality impacts arising from the | construction works area | Contractor | | | | | WPCO | |
| | | merceptors. | construction works | works area | | | | | | EIAO-TM Annex 6 | |
| 6.8.1 | WQ6 | • All sewer and drains will be sealed to | To minimise potential | Infrastructure | SENTX | | ✓ | | | ProPECC PN 1/94 | Not applicable |
| | | prevent building debris, soil etc from entering public sewers/drains before | water quality impacts arising from the | area at existing SENT | Contractor | | | | | WPCO | |
| | | commencing any demolition works | demolition works | Landfill | | | | | | EIAO-TM Annex 6 | |
| 6.8.1 | WQ7 | • During the excavation works for the | To minimise potential | Tunnel boring | | | ✓ | | | ProPECC PN 1/94 | Not applicable. |
| | | twin drainage tunnels, the recycle water for cooling the cutter head of | water quality impacts arising from the | sites | Contractor | | | | | WPCO | Excavation of drainage tunnels is not required |
| | | the TBM will be conveyed to the sedimentation tanks for treatment and most of the treated water will be reused, where applicable and as much as possible, in the boring operations. | tunnel works | | | | | | | EIAO-TM Annex 6 | in the latest landfill design. |
| 6.8.1 | WQ8 | • The fuel and waste lubricant oil from | To minimise potential | SENTX Site | SENTX | | ✓ | | | ProPECC PN 1/94 | Implemented |
| | | the on-site maintenance of machinery and equipment will be collected by a | water quality impacts arising from improper | | Contractor | | | | | WPCO | |
| | | licensed chemical waste collector. | handling of fuel and oil | | | | | | | Waste Disposal Ordinance (WDO) | |
| 6.8.1 | WQ9 | Implementation of excavation | To minimise | All | SENTX | | ✓ | | | ProPECC PN 1/94 | Implemented |
| | | schedules, lining and covering of excavated stockpiles | contaminated stormwater run-off | construction works | Contractor | | | | | WPCO | |
| | | excavated stockpiles | from the SENTX Site | | | | | | | EIAO-TM Annex 6 | |
| 6.13 | WQ10 | 0 1 5 | To minimise potential | SENTX Site | SENTX | | ✓ | | | WPCO | Implemented |
| | | will be conducted on a regular basis as stated in the EM&A Manual. | water quality impacts on surface water arising from the construction works | | Contractor | | | | | Water-TM | |

| EIA Ref. | EM&A Ref | Environmental Protection Measures/ Mitigation Measures | Objectives of the Recommended Measure & Main Concerns to address | Location of the Measures | Who to implement the measure? | | | implement ure? ⁽¹⁾ O/R A | What requirements or standards for the measure to achieve? | Implementation Status and Remarks |
|----------|-------------|--|---|---|-------------------------------|---|---|---|--|--------------------------------------|
| 6.8.2 | WQ11 | Sewage Effluents | | | | | | | | |
| | | Sufficient chemical toilets will be provided for the construction workforce. | To minimise potential water quality impacts arising from the sewage effluents | SENTX Site | SENTX Contractor | | ✓ | | WPCO | Implemented |
| 6.8.2 | WQ12 | Untreated sewage will not be allowed | To minimise potential | SENTX Site | SENTX | | ✓ | | WPCO | Implemented |
| | | to discharge into the surrounding water body. | water quality impacts arising from the sewage effluents | | Contractor | | | | WDO | |
| 6.8.2 | WQ13 | A licensed waste collector will be | To minimise potential | SENTX Site | SENTX | | ✓ | | WPCO | Implemented |
| | | employed to clean the chemical toilets on a regular basis. | water quality impacts arising from the sewage effluents | | Contractor | | | | WDO | |
| Waste Ma | nagement | - Construction Phase | | | | | | | | |
| 7.6.1 | WM1 | All the necessary waste disposal permits are obtained prior to the commencement of construction work. | To ensure compliance with relevant statutory requirements | Before construction works commence | SENTX Contractor | ✓ | ✓ | | WDO | Implemented |
| 7.6.1 | WM2 | Management of Waste Disposal | | | | | | | | |
| | | The construction contractor will open a | To ensure that | SENTX Site | SENTX | | ✓ | | WDO | Implemented |
| | | billing account with the EPD. Every construction waste or public fill load to be transferred to the Government waste disposal facilities such as public fill reception facilities, sorting facilities, | adverse environmental impacts are prevented | | Contractor | | | | Waste Disposal (Charges for Disposal of Construction Waste) Regulation; | |
| | | landfills will required a valid "chit" which contains the information of the account holder to facilitate waste | | | | | | | Works Bureau Technical Circular No.31/2004; and | |

| EIA Ref. | EM&A Ref | Environmental Protection Measures/ Mitigation Measures | Objectives of the Recommended Measure & Main Concerns to address | Location of the Measures | Who to implement the measure? | | o implement nsure? ⁽¹⁾ O/R A | What requirements or standards for the measure to achieve? | Implementation Status and Remarks |
|----------|-------------|---|---|-----------------------------|-------------------------------|----------|---|---|--|
| | | transaction recording and billing to the waste producer. A trip-ticket system will also be established to monitor the disposal of construction waste at the SENT Landfill and to control fly-tipping. The trip-ticket system will be included as one of the contractual requirements and implemented by the contractor. | | | | | | Annex 5 and Annex 6 of Appendix G of ETWBTC No. 19/2005) | |
| | | A recording system for the amount of waste generated, recycled and disposed of (including the disposal sites) will be established. | | | | | | | |
| 7.6.1 | WM3 | Measures for the Reduction of Construction Waste Generation | | | | | | | |
| | | Inert and non-inert construction waste will be segregated and stored in different containers or skips to facilitate reuse or recycling of the inert waste and proper disposal of the non-inert construction waste. Specific areas of the work site will be designated for such segregation and storage if immediate use is not practicable. | To reduce construction waste generation | SENTX Site | SENTX Contractor | ✓ | | WDO EIAO-TM Annex 7 | Implemented |
| 7.6.1 | WM4 | Chemical Waste The construction contractor will register. | To oncurs wromer | CENITY C:La | SENTX | √ | | WDO | Deficiency of |
| | | The construction contractor will register as a chemical waste producer with the EPD. Chemical waste will be handled in accordance with the <i>Code of Practice on the Packaging, Handling and Storage of</i> | To ensure proper handling of chemical waste | SENTX Site | Contractor | · | | Code of Practice on the Packaging, Handling and Storage of Chemical Wastes | Deficiency of mitigation measures but rectified by the Contractor |

| EIA Ref. | EM&A Ref | Environmental Protection Measures/ Mitigation Measures Chemical Wastes. | Objectives of the Recommended Measure & Main Concerns to address | Location of the Measures | Who to implement the measure? | the n | | implemo ure? ⁽¹⁾ O/R | What requirements or standards for the measure to achieve? | Implementation Status and Remarks |
|--|-------------|---|---|-----------------------------|-------------------------------|-------|---|---------------------------------------|--|--|
| 7.6.1 | WM5 | Sewage An adequate number of portable toilets will be provided at the site to ensure that sewage from site staff is properly collected. The portable toilets will be desludged and maintained regularly by a specialist contractor. | | SENTX Site | SENTX Contractor | | ✓ | | WDO EIAO-TM Annex 7 | Implemented |
| 7.6.1 and SENTX latest design | WM6 | General Refuse General refuse will be stored in enclosed bins separately from construction and chemical wastes. The general refuse will be delivered to a transfer station or other landfill, separately from construction and chemical wastes, on a daily basis to reduce odour, pest and litter impacts. | To ensure proper handling of general refuse | SENTX Site | SENTX Contractor | | ✓ | | WDO EIAO-TM Annex 7 | Deficiency of mitigation measures but rectified by the Contractor |
| 7.6.1 | WM7 | Recycling bins will be provided at strategic locations to facilitate recovery of aluminium can and waste paper from the SENTX Site. Materials recovered will be sold for recycling. Staff Training | | | | | | | | |
| | | At the commencement of the construction works, training will be provided to workers on the concepts of site cleanliness and on appropriate waste management procedures, including | To ensure that adverse environmental impacts are prevented | SENTX Site | SENTX Contractor | | ✓ | | | Implemented |

| EIA Ref. | EM&A Ref | Environmental Protection Measures/ Mitigation Measures | Objectives of the Recommended Measure & Main | Location of the Measures | Who to implement the measure? | | implement sure? (1) O/R A | What requirements or standards for the measure to achieve? | Implementation Status and Remarks |
|--|-------------|---|--|---|-------------------------------|----------|---------------------------------|---|--------------------------------------|
| | | waste reduction, reuse and recycling. | Concerns to address | | | | | | |
| 7.8 | WM8 | Environmental Monitoring & Audit Requirements | To ensure that | SENTX Site | SENTX | √ | | WDO | Implemented |
| | | Weekly audits of the waste management practices will be carried out during the construction phase. The audits examine all aspects of waste management including waste generation, storage, recycling, transport and disposal. | adverse environmental impacts are prevented | | Contractor | | | | |
| Landfill G | as Hazar | ds - Design and Construction Phase | | | | | | | |
| 8.6.2 and SENTX latest design | LFG1 | Precautionary measures to be adopted by the contractors at the Project site and the adjacent development site within the landfill consultation zone are outlined in Paragraphs 8.3 to 8.49 of EPD's Landfill Gas Hazard Assessment Guidance Notes (the Guidance Note). Those precautionary measures applicable to the SENTX will be confirmed in the detailed Qualitative Landfill Gas Hazard Assessment to be submitted by the contractor. | | All construction works area | SENTX Contractor | ✓ | | Paragraphs 8.3 to 8.49 of EPD's Landfill Gas Hazards Assessment Guidance Note EIAO-TM Annex 7 | Implemented |
| 8.6.2 | LFG2 | Monitoring will be undertaken when construction works are carried out in confined space within the consultation zone with reference to the monitoring requirements and procedures specified in Paragraphs 8.23 to 8.28 of EPD's <i>Guidance Note</i> will be followed. | To protect workers from landfill gas risk | Confined space within the construction works area | SENTX Contractor | ✓ | | | Implemented |

| EIA Ref. | EM&A Ref | Environmental Protection Measures/ Mitigation Measures | Objectives of the Recommended | Location of the Measures | Who to implement | | | imples | | What requirements or standards for the | Implementation Status and Remarks |
|----------|-------------|---|---|--------------------------|---------------------|----------|----------|--------|---|--|--------------------------------------|
| | | | Measure & Main Concerns to address | | the measure? | | С | O/R | | measure to achieve? | |
| | | In the event of the trigger levels being exceeded, it is recommended that a person, such as the Safety Officer, is nominated, with deputies, to be responsible for dealing with any emergency which may occur due to landfill gas. In an emergency situation, the nominated person, or his deputies, shall have the necessary authority and shall ensure that the confined space is evacuated and the necessary works implemented for reducing the concentrations of gas. The appropriate organisations shall be contact. | | | | | | | | | |
| 8.6.3 | LFG4 | Implementation of engineering measures according to Contract Specification requirements. These measures will include the placement of liner and installation of landfill gas management system to contain, manage and control landfill gas. | To protect workers from landfill gas risk | SENTX Site | SENTX Contractor | ✓ | √ | ✓ | ✓ | EIAO-TM Annex 7 | Implemented |
| 8.6.3 | LFG5 | Engineering measures to significant engineering measures will be required in the design of the SENTX to protect the staff working in the infrastructure area. These measures include a combination of passive and active systems (examples are recommended in EPD's <i>Guidance Notes</i>). Landfill gas monitoring boreholes will be installed at the edge of the waste slope | · · | Infrastructure Area | SENTX Contractor | ✓ | ✓ | | | EPD's Landfill Gas Hazards Assessment Guidance Note EIAO-TM Annex 7 | Implemented |

| EIA Ref. | EM&A Ref | Environmental Protection Measures/ Mitigation Measures | Objectives of the Recommended | Location of the Measures | Who to implement | the | meas | impleme sure? (1) | | What requirements or standards for the | Implementation Status and Remarks |
|-----------|-------------|---|--|----------------------------|------------------|-----|------|----------------------|---|--|--------------------------------------|
| | | | Measure & Main Concerns to address | | the measure? | D | С | O/R | A | measure to achieve? | |
| | | between the waste and the new infrastructure area to monitor the migration of landfill gas, if any. | | | | | | | | | |
| Ecology - | Construct | tion Phase | | | | | | | | | |
| 9.10.2 | EC1 | Measures to control construction runoff: | To minimise potential | | SENTX | | ✓ | | | EIAO-TM Annex 16 | Implemented |
| | | • Exposed soil areas will be | water quality impacts affecting ecological | construction works area | Contractor | | | | | ProPECC PN 1/94 | |
| | | minimised to reduce the contamination of runoff and erosion; | resources | | | | | | | Water Pollution Control Ordinance (WPCO) | |
| | | | | | | | | | | EIAO-TM Annex 6 | |
| | | To prevent stormwater runoff from washing across exposed soil surfaces, perimeter channels will be constructed in advance of site formation works and earthworks and intercepting channels will be provided for example along the edge of excavation; | | | | | | | | - | Implemented |
| | | Silt removal facilities, channels and manholes will be maintained and the deposited silt and grit will be removed regularly to ensure they are functioning properly at all times; | | | | | | | | - | Implemented |
| | | Temporary covers such as tarpaulin will also be provided to minimise the generation of high suspended solids runoff; | | | | | | | | - | Implemented |

| | | Objectives of the | Location of | Who to | | | | | What requirements | Implementation Status and Remarks |
|-----|--|--|---|--|--|--|--|---|--|--|
| KCI | William Measures | Measure & Main Concerns to address | the weasures | _ | | | | | measure to achieve? | Status and Remarks |
| | The surface runoff contained any oil and grease will pass through the oil interceptors; and, | | | | | | | | - | Not applicable |
| | Control measures, including implementation of excavation schedules, lining and covering of excavated stockpiles will be implemented to minimise contaminated stormwater run-off from the SENTX site. | | | | | | | | - | Implemented |
| EC2 | Good Construction Practice: | | | | | | | | | |
| | Fences along the boundary of the SENTX Site will be erected before the commencement of works to prevent vehicle movements, and encroachment of personnel, onto adjacent areas. | To minimise potential ecological impacts arising from the Project | SENTX Site | SENTX Contractor | | √ | | | EIAO-TM Annex 16 | Implemented |
| | The work site boundaries will be regularly checked to ensure that they are not breached and that damage does not occur to surrounding areas. | | | | | | | | | |
| EC9 | Environmental Monitoring & Audit Requirements | | | | | | , | , | | |
| | The implementation of the ecological mitigation measures should be checked as part of the environmental monitoring and audit procedures during the | To ensure that adverse ecological impacts are prevented | SENTX | SENTX Contractor | | ✓ | √ | √ | EIAO-TM Annex 16 | Implemented |
| | Ref EC2 | The surface runoff contained any oil and grease will pass through the oil interceptors; and, Control measures, including implementation of excavation schedules, lining and covering of excavated stockpiles will be implemented to minimise contaminated stornwater run-off from the SENTX site. EC2 Good Construction Practice: Fences along the boundary of the SENTX Site will be erected before the commencement of works to prevent vehicle movements, and encroachment of personnel, onto adjacent areas. The work site boundaries will be regularly checked to ensure that they are not breached and that damage does not occur to surrounding areas. EC9 Environmental Monitoring & Audit Requirements The implementation of the ecological mitigation measures should be checked as part of the environmental monitoring | Ref Mitigation Measures Recommended Measure & Main Concerns to address - The surface runoff contained any oil and grease will pass through the oil interceptors; and, - Control measures, including implementation of excavation schedules, lining and covering of excavated stockpiles will be implemented to minimise contaminated stormwater run-off from the SENTX site. EC2 Good Construction Practice: - Fences along the boundary of the SENTX Site will be erected before the commencement of works to prevent vehicle movements, and encroachment of personnel, onto adjacent areas The work site boundaries will be regularly checked to ensure that they are not breached and that damage does not occur to surrounding areas. EC9 Environmental Monitoring & Audit Requirements The implementation of the ecological mitigation measures should be checked as part of the environmental monitoring | Ref Mitigation Measures Recommended Measure & Main Concerns to address * The surface runoff contained any oil and grease will pass through the oil interceptors; and, * Control measures, including implementation of excavation schedules, lining and covering of excavated stockpiles will be implemented to minimise contaminated stormwater run-off from the SENTX site. EC2 Good Construction Practice: * Fences along the boundary of the SENTX Site will be erected before the commencement of works to prevent vehicle movements, and encroachment of personnel, onto adjacent areas. * The work site boundaries will be regularly checked to ensure that they are not breached and that damage does not occur to surrounding areas. EC9 Environmental Monitoring & Audit Requirements The implementation of the ecological mitigation measures should be checked as part of the environmental monitoring | Recommended Measures Econocerns to address **Inhe surface runoff contained any oil and grease will pass through the oil interceptors; and, **Control measures, including implementation of excavation schedules, lining and covering of excavated stockpiles will be implemented to minimise contaminated stormwater run-off from the SENTX site. **Fences along the boundary of the SENTX Site will be erected before the commencement of works to prevent vehicle movements, and encroachment of personnel, onto adjacent areas. **Inhe work site boundaries will be regularly checked to ensure that they are not breached and that damage does not occur to surrounding areas. **Fences** **To minimise potential ecological impacts arising from the Project** **To minimise potential ecological impacts arising from the Project** **To minimise potential ecological impacts arising from the Project** **To ensure that they are not breached and that damage does not occur to surrounding areas. **To ensure that adverse ecological impacts are prevented as part of the environmental monitoring and adverse ecological impacts are prevented as part of the environmental monitoring impacts are prevented as part of the environmental monitoring and adverse ecological impacts are prevented and the environmental monitoring impacts are prevented and the environmental monitoring impacts are prevented and environmental monitoring impacts are prevented impacts are prevented and environmental monitoring i | Recommended Measures implement the Measure Main Concerns to address * The surface runoff contained any oil and grease will pass through the oil interceptors; and, * Control measures, including implementation of excavation schedules, lining and covering of excavated stockpiles will be implemented to minimise contaminated stormwater run-off from the SENTX site. **EC2*** Good Construction Practice:** * Fences along the boundary of the SENTX Site will be erected before the commencement of works to prevent vehicle movements, and encroachment of personnel, onto adjacent areas.** * The work site boundaries will be regularly checked to ensure that they are not breached and that damage does not occur to surrounding areas.** * Environmental Monitoring & Audit Requirements The implementation of the ecological mitigation measures should be checked as ap art of the environmental monitoring areas as part of the environmental monitoring areas.** ** The surface runoff contained and was to Concerns to address* ** To minimise potential cological impacts arising from the Project* ** To minimise potential selected before the commencement of works to prevent vehicle movements, and encroachment of personnel, onto adjacent areas.** ** To minimise potential selected before the cological impacts arising from the Project* ** To minimise potential selected before the ecological impacts arising from the Project* ** To minimise potential selected before the ecological impacts arising from the Project* ** To minimise potential selected before the ecological impacts arising from the Project* ** To minimise potential selected before the ecological impacts arising from the Project* ** To minimise potential selected before the ecological impacts arising from the Project* ** To minimise potential selected before the ecological impacts arising from the Project* ** To minimise potential selected before the ecological impacts arising from the Project* ** To minimise potential selected before the ecological impacts arising from th | Recommended Measure & Main Concerns to address • The surface runoff contained any oil and grease will pass through the oil interceptors; and, • Control measures, including implementation of excavation schedules, lining and covering of excavated stockpiles will be implemented to minimise contaminated stormwater run-off from the SENTX site. EC2 Good Construction Practice: • Fences along the boundary of the SENTX Site will be erected before the commencement of works to prevent vehicle movements, and encroachment of personnel, onto adjacent areas. • The work site boundaries will be regularly checked to ensure that they are not breached and that damage does not occur to surrounding areas. EC9 Environmental Monitoring & Audit Requirements To ensure that adverse ecological impacts are prevented as part of the environmental monitoring impacts are prevented as part of the environmental monitoring impacts are prevented and that adverse ecological impacts are prevented as part of the environmental monitoring impacts are prevented as part of the environmental monitoring impacts are prevented in the Measure & Mea | Recommended Measures implement the measure? For the measure in the measure? The surface runoff contained any oil and grease will pass through the oil interceptors; and, • Control measures, including implementation of excavation schedules, lining and covering of excavated stockpiles will be implemented to minimise contaminated stormwater run-off from the SENTX site. EC2 Good Construction Practice: • Fences along the boundary of the SENTX Site will be erected before the commencement of works to prevent vehicle movements, and encroachment of personnel, onto adjacent areas. • The work site boundaries will be regularly checked to ensure that they are not breached and that damage does not occur to surrounding areas. EC9 Environmental Monitoring & Audit Requirements To ensure that adverse ecological impacts are prevented infigation measures should be checked as a part of the environmental monitoring | Recommended Measure & Main Concerns to address In the surface runoff contained any oil and grease will pass through the oil interceptors; and, In the surface runoff contained any oil and grease will pass through the oil interceptors; and, In the surface runoff contained any oil and grease will pass through the oil interceptors; and, In the surface runoff contained any oil and grease will pass through the oil interceptors; and, In the surface runoff contained any oil and grease will pass through the oil interceptors; and, In the surface runoff contained any oil and grease will pass through the oil interceptors; and, In the surface runoff contained any oil and grease will pass through the oil interceptors; and, In the surface runoff contained any oil and grease will pass through the oil interceptors; and, In the surface runoff contained any oil and grease will pass through the oil interceptors; and, In the surface runoff contained any oil and grease will pass through the oil interceptors; and, In the surface runoff contained any oil and grease will pass through the oil interceptors; and, In the surface runoff contained any oil and grease will pass through the oil interceptors; and, In the surface runoff contained any oil and grease will pass through the oil interceptors; and, In the surface runoff contained and the ecological minus planets are prevented and than a the surface runoff and the | Recommended Measures Main Concerns to address **Inferior surface runoff contained any oil and grease will pass through the oil interceptors; and, **Control measures, including implementation of excavation schedules, lining and covering of exavated stockpiles will be implemented to minimise contaminated stormwater runoff from the SENTX site will be erected before the commencement of works to a pervent vehicle movements, and encroachment of personnel, onto adjacent areas. **Project** **To ensure that adamage does not occur to surrounding areas.** **ERIOR The work site boundaries will be regularly checked to ensure that they are not breached and that damage does not occur to surrounding areas.** **ERIOR The work site boundaries and that damage does not occur to surrounding areas.** **To ensure that adverse ecological mitigation measures should be checked in migratis are prevented and the environmental monitoring a part of the environmental monitoring as part of the environmental monitori |

| EIA Ref. | EM&A Ref | Environmental Protection Measures/ Mitigation Measures | Objectives of the Recommended Measure & Main Concerns to address | Location of the Measures | Who to implement the measure? | | | implement sure? ⁽¹⁾ O/R A | What requirements or standards for the measure to achieve? | Implementation Status and Remarks |
|-----------|-------------|--|---|-----------------------------------|-------------------------------|---|----------|--|--|--------------------------------------|
| | | construction period. | | | | | | | | |
| Landscape | e and Visu | al - Construction Phase | | | | | | | | |
| 10.6.5 | LV1 | CM1 - The construction area and area allowed for the contractor's office, leachate treatment plant and laboratory areas will be minimised to a practical minimum, to avoid impacts on adjacent landscape. | To minimise the landscape and visual impacts | SENTX Site | SENTX Contractor | | ✓ | | EIAO-TM Annex 18 and ETWBC 3/2006 | Implemented |
| 10.6.5 | LV2 | CM2 - Topsoil, where identified, will be stripped and stored for re-use in the construction of the soft landscape works, where practical. The Contract Specification will include storage and reuse of topsoil as appropriate. | To minimise the landscape and visual impacts | All construction works area | SENTX Contractor | | ✓ | | EIAO-TM Annex 18 | Not applicable |
| 10.6.5 | LV3 | CM3 - All existing trees at the edges of the landfill will be carefully protected during construction. Detailed Tree Protection Specification will be provided in the Contract Specification. Under this Specification, the Contractor will be required to submit, for approval, a detailed working method statement for the protection of trees prior to undertaking any works adjacent to all retained trees, including trees in Contractor's works areas. | To minimise the landscape and visual impacts | Potential impacted area | SENTX Contractor | | ✓ | | EIAO-TM Annex 18 and ETWBC 3/2006 | Implemented |
| 10.6.5 | LV4 | CM4 - Trees unavoidably affected by the works will be transplanted, where necessary and practical. A detailed Tree | landscape and visual | Potential impacted area | SENTX Contractor | ✓ | ✓ | | EIAO-TM Annex 18 and ETWBC 3/2006 | Not applicable |

| EIA Ref. | EM&A Ref | Environmental Protection Measures/ Mitigation Measures | Objectives of the Recommended Measure & Main Concerns to address | Location of the Measures | Who to implement the measure? | | | o implement sure? ⁽¹⁾ O/R A | What requirements or standards for the measure to achieve? | Implementation Status and Remarks |
|---|-------------|--|---|--------------------------------------|-------------------------------|----------|---|--|--|--------------------------------------|
| | | Transplanting Specification will be provided in the Contract Specification, if applicable. Sufficient time for necessary tree root and crown preparation periods will be allowed in the project programme. | | | | | | | | |
| 10.6.5 and SENTX latest design | LV5 | CM5 - Within 3 months of taking possession of the SENTX Site, the Contractor will plant advance screen planting of native species at Light Standard size at 1.5m centres along the High Junk Peak Trail so as to screen views of the Works from the trail. Tree planting locations will be agreed with AFCD. Works will be completed within 9 months of taking possession of the SENTX Site. | To minimise the landscape and visual impacts | At High Junk Peak Hiking Trail | SENTX Contractor | | ✓ | | EIAO-TM Annex 18 | Implemented |
| 10.6.5 | LV6 | CM6 - The Contractor's office, leachate treatment plant and laboratory will be given an aesthetic treatment in earth tones to reduce their visual impact and albedo and blend them into the surrounding landscape. | To minimise the landscape and visual impacts | Infrastructure area | SENTX Contractor | ✓ | ✓ | | EIAO-TM Annex 18 | Implemented |
| 10.6.5 | LV7 | CM7 - The Contractor's office, leachate treatment plant and laboratory will be surrounded by a minimum of 5m wide and 0.75m high earth bund on the west and south sides planted with a dense screen of tree and shrub vegetation. Additional tree planting will be provided in unused spaces with thin infrastructure | To minimise the landscape and visual impacts | Infrastructure area | SENTX Contractor | √ | ✓ | | EIAO-TM Annex 18 and ETWBC 7/2002 | Not applicable |

| EIA Ref. | EM&A Ref | Environmental Protection Measures/ Mitigation Measures | Objectives of the Recommended | Location of the Measures | Who to implement | | | implement sure? (1) | What requirements or standards for the | Implementation Status and Remarks |
|---|-------------|--|---|--------------------------|----------------------------|---|----------|------------------------|--|--------------------------------------|
| | | | Measure & Main Concerns to address | | the measure? | D | C | O/R A | measure to achieve? | |
| | | site, along access roads and in and around car parks. This will be supplemented with shrub planting, where appropriate. | | | | | | | | |
| 10.6.5 | LV8 | CM8 - Planting trials will be carried out in an on-site nursery prior to implementation of the first phase of restoration to establish the best planting matrix and management intensity of the recommended plant materials for the restoration. | To minimise the landscape and visual impacts | SENTX Site | SENTX Contractor | | ✓ | | EIAO-TM Annex 18 | Implemented |
| 11.4.1 and SENTX latest design | LV9 | During the preparation of the detailed landscape design plan, the design submission will be audited against the recommendation proposed in the <i>ER Report</i> by the Registered Landscape Architect from the ET. | To ensure the implementation of mitigation measures proposed in this EIA Report | SENTX Site | SENTX Contractor/E T | ✓ | ✓ | | EIAO-TM Annex 18 | Implemented |

Annex C

Monitoring Schedule for This Reporting Period

South East New Territories (SENT) Landfill Extension EM&A Impact Monitoring Schedule during Construction Phase

October 2020

| Sun | Mon | Tue | Wed | Thu | Fri | Sat |
|--------------------|-----------------------|-----------------|---|---|-----|---------------------|
| | | | | Dust Monitoring | 2 | 3 |
| 4 | 5 | 6 | 7 Surface Water Monitoring (pm) Noise Monitoring (pm) Dust Monitoring | 8 | 9 | 10 |
| 11 | 12 | Dust Monitoring | 14 | Surface Water Monitoring (pm) Noise Monitoring (pm) | 16 | 17 |
| 18 | 19 Dust Monitoring | 20 | Surface Water Monitoring (pm) Noise Monitoring (pm) | 22 | 23 | 24 |
| 25 Dust Monitoring | 26 | 27 | 28 | Surface Water Monitoring (pm) Noise Monitoring (pm) | 30 | 31 Dust Monitoring |

Note

Impact dust monitoring will be conducted at two monitoring stations (DM1 and DM2) under the on-going EM&A programme TKO Area 137 Fill Bank and the results will be shared with SENTX.

Air Quality

Calibration Certificates for Dust Monitoring Equipment



8/F Block B, Veristrong Industrial Centre, 34-36 Au Pui Wan Street, Fo Tan, Hong Kong

T: +852 2695 8318 F: +852 2695 3944 E: etl@ets-testconsult.com W: www.ets-testconsult.com

Calibration Report of High Volume Air Sampler

Manufacturer

Graseby 105

Date of Calibration

07 August 2020

Serial No.

9795 (ET/EA/003/18)

Calibration Due Date

06 October 2020

Method


Five-point calibration by using standard calibration kit Tisch TE-5025A refer to the

Operations Manual

Results

| Flow recorder reading (cfm) | | 48 | 44 | 38 | 32 | 26 |
|---------------------------------|--|------|--------|------|------|------|
| Qstd (Actual flow rate, m³/min) | | 1.69 | 1.49 | 1.24 | 1.03 | 0.83 |
| Pressure: 756.81 mm Hg | | | Temp.: | 302 | K | |

Sampler 9795 Calibration Curve Site: Tseung Kwan O 137 (TKO-A1)

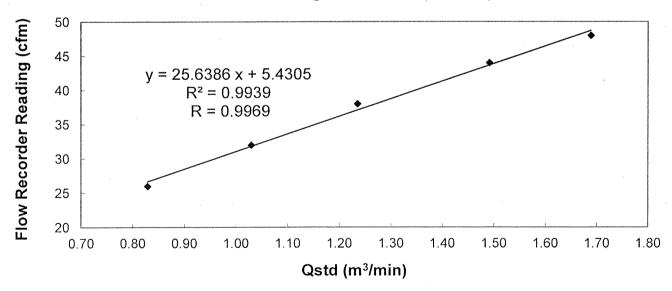

Acceptance Criteria: Correlation coefficient (r) of the calibration curve greater than 0.990 after a 5-point calibration

The high volume sampler complies* / does not comply* with the specified requirements and is deemed acceptable*/ unacceptable* for use.

Calibrated by :

CHAN, Wai Man (Technician) Checked by

LĂU, Chi Leung

(Environmental Team Leader)



8/F Block B, Veristrong Industrial Centre, 34-36 Au Pui Wan Street, Fo Tan, Hong Kong

T: +852 2695 8318 F: +852 2695 3944 E: etl@ets-testconsult.com W: www.ets-testconsult.com

Calibration Report of High Volume Air Sampler

Manufacturer

Graseby 105

Date of Calibration

05 October 2020

Serial No.

9795 (ET/EA/003/18)

Calibration Due Date

04 December 2020

Method


Five-point calibration by using standard calibration kit Tisch TE-5025A refer to the

Operations Manual

Results

| Flow recorder reading (cfm) | | 48 | 45 | 38 | 33 | 26 |
|---------------------------------|--|------|---------|------|------|------|
| Qstd (Actual flow rate, m³/min) | | 1.69 | 1.50 | 1.24 | 1.04 | 0.83 |
| Pressure: 758.31 mm Hg | | | Temp. : | 301 | K | |

Sampler 9795 Calibration Curve Site: Tseung Kwan O 137 (TKO-A1)

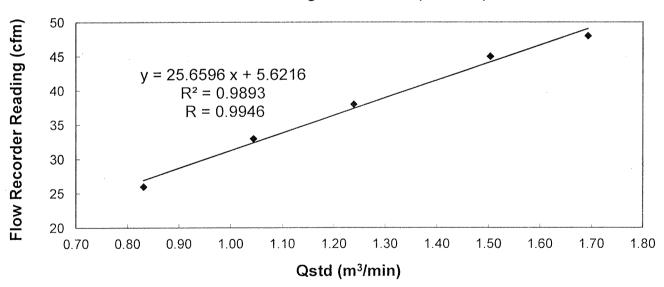

Acceptance Criteria: Correlation coefficient (r) of the calibration curve greater than 0.990 after a 5-point calibration

The high volume sampler complies* / does not comply* with the specified requirements and is deemed acceptable*/ unacceptable* for use.

Calibrated by:

CHAN, Wai Man (Technician) Checked by:

LAU, Chi Leung

(Environmental Team Leader)



8/F Block B, Veristrong Industrial Centre 34-36 Au Pui Wan Street, Fo Tan, Hong Kong

T: +852 2695 8318 F: +852 2695 3944 E: etl@ets-testconsult.com W: www.ets-testconsult.com

Calibration Report of High Volume Air Sampler

Manufacturer

Andersen G1051

Date of Calibration

07 August 2020

Serial No.

1176 (ET/EA/003/05)

Calibration Due Date

06 October 2020

Method


Based on Operations Manual for the 5-point calibration using standard calibration kit

manufactured by Tisch TE-5025 A

Results

| Flow recorder reading (cfm) | | 54 | 46 | 41 | 34 | 27 |
|---------------------------------|--------------|------|--------|------|------|------|
| Qstd (Actual flow rate, m³/min) | | 1.83 | 1.64 | 1.50 | 1.17 | 0.92 |
| Pressure : | 753.81 mm Hg | | Temp.: | 306 | K | |

Sampler 1176 Calibration Curve Site: Tseung Kwan O 137 (TKO-A2a)

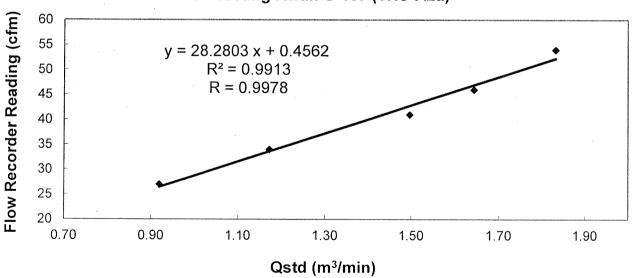

Acceptance Criteria: Correlation coefficient (r) of the calibration curve greater than 0.990 after a 5-point calibration

The high volume sampler complies* / does not comply* with the specified requirements and is deemed acceptable* / unacceptable * for use.

Calibrated by

CHAN, Wai Man

(Technician)

Checked by

LAU, Chi Leung

(Environmental Team Leader)

- END OF REPORT -



8/F Block B, Veristrong Industrial Centre, 34-36 Au Pui Wan Street, Fo Tan, Hong Kong

T: +852 2695 8318 F: +852 2695 3944 E: etl@ets-testconsult.com W: www.ets-testconsult com

Calibration Report of High Volume Air Sampler

Manufacturer

Andersen G1051

Date of Calibration

05 October 2020

Serial No.

1176 (ET/EA/003/05)

Calibration Due Date

04 December 2020

Method


Based on Operations Manual for the 5-point calibration using standard calibration kit

manufactured by Tisch TE-5025 A

Results

| Flow recorder reading (cfm) | | 53 | 46 | 41 | 34 | 27 |
|---------------------------------|--------------|------|--------|------|------|------|
| Qstd (Actual flow rate, m³/min) | | 1.84 | 1.66 | 1.51 | 1.18 | 0.93 |
| Pressure : | 758.31 mm Hg | | Temp.: | 301 | K | |

Sampler 1176 Calibration Curve Site: Tseung Kwan O 137 (TKO-A2a)

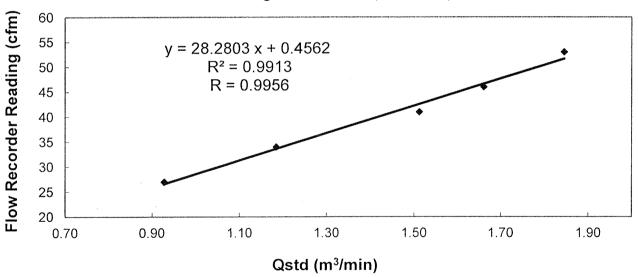

Acceptance Criteria: Correlation coefficient (r) of the calibration curve greater than 0.990 after a 5-point calibration

The high volume sampler complies* / does not comply* with the specified requirements and is deemed acceptable* / unacceptable * for use.

Calibrated by:

CHAN, Wai Man (Technician) Checked by

LAU, Chi Leung

(Environmental Team Leader)

- END OF REPORT -

24-hour TSP Monitoring Results

Table D2.1 24-hour TSP Monitoring Results at DM1

| Start Date | Start Time | Finish Date | Finish Time | Weather | 24-hour TSP (μg/m3) |
|------------|------------|-------------|-------------|---------|---------------------|
| 1 Oct 20 | 8:00 | 2 Oct 20 | 8:00 | Cloudy | 111 |
| 7 Oct 20 | 12:00 | 8 Oct 20 | 12:00 | Cloudy | 106 |
| 13 Oct 20 | 8:00 | 14 Oct 20 | 8:00 | Rainy | 95 |
| 19 Oct 20 | 8:40 | 20 Oct 20 | 8:40 | Cloudy | 106 |
| 25 Oct 20 | 8:00 | 26 Oct 20 | 8:00 | Cloudy | 113 |
| 31 Oct 20 | 8:00 | 1 Nov 20 | 8:00 | Cloudy | 114 |
| | | | | Average | 108 |
| | | | | Min | 95 |
| | | | | Max | 114 |

Note:

DM1 corresponds to the existing TSP monitoring station TKO-A1 currently operating by CEDD.

Figure D2.1 Graphical Presentation for 24-hr TSP Monitoring at DM1

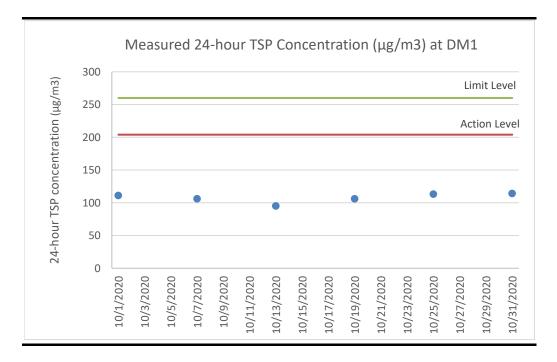



Table D2.2 24-hour TSP Monitoring Results at DM2

| Start Date | Start Time | Finish Date | Finish Time | Weather | 24-hour TSP (μg/m3) |
|------------|------------|-------------|-------------|---------|---------------------|
| 1 Oct 20 | 8:00 | 2 Oct 20 | 8:00 | Cloudy | 103 |
| 7 Oct 20 | 12:00 | 8 Oct 20 | 12:00 | Cloudy | 92 |
| 13 Oct 20 | 8:00 | 14 Oct 20 | 8:00 | Rainy | 84 |
| 19 Oct 20 | 8:50 | 20 Oct 20 | 8:50 | Cloudy | 115 |
| 25 Oct 20 | 8:00 | 26 Oct 20 | 8:00 | Cloudy | 99 |
| 31 Oct 20 | 8:00 | 1 Nov 20 | 8:00 | Cloudy | 109 |
| | | | | Average | 100 |
| | | | | Min | 84 |
| | | | | Max | 115 |

Note:

 $\ensuremath{\mathsf{DM2}}$ corresponds to the existing TSP monitoring station TKO-A2a currently operating by CEDD.

Figure D2.2 Graphical Presentation for 24-hr TSP Monitoring at DM2

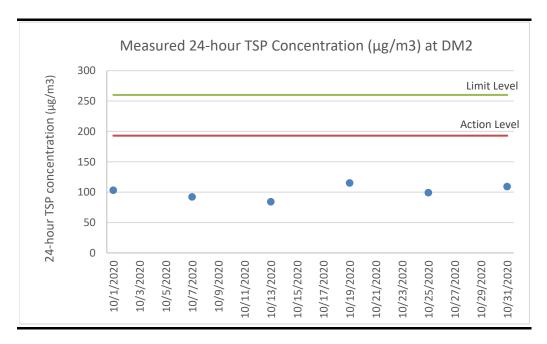

Event and Action Plan for Dust Monitoring

Annex D3 Event and Action Plan for Dust Monitoring During Construction Phase

| | | Action | |
|---|--|--|--|
| Event | ET | IEC | Contractor |
| Action Level | | | |
| Exceedance for one sample | Identify the source(s) and investigate the cause(s) of exceedance Prepare Notification of Exceedance within 24 hours Inform Contractor, IEC and Project Proponent whether the cause of exceedance is due to the Project Repeat measurement to confirm finding if exceedance is due to the Project Increase monitoring frequency to daily if exceedance is due to the Project and continue until the monitoring results reduce to below action level | Verify the Notification of Exceedance Check monitoring data submitted by ET Check Contractor's working methods | Rectify any unacceptable practice Amend working methods if appropriate |
| Exceedance for two or more consecutive samples | Identify the source(s) and investigate the cause(s) of exceedance Prepare Notification of Exceedance within 24 hours Inform Contractor, IEC and Project Proponent whether the cause of exceedance is due to the Project Discuss with Contractor and IEC for remedial measures required Ensure remedial measures are properly implemented If exceedance continues, arrange meeting with Contractor & IEC Continue monitoring at daily intervals if exceedance is due to the Project If no exceedance for 3 consecutive days, cease additional monitoring | Check monitoring data submitted by ET | Submit proposals for remedial measures to IEC Implement the agreed proposals Amend proposal if appropriate |


| | | Action | |
|---|---|--|---|
| Event | ET | IEC | Contractor |
| Limit Level | | | |
| Exceedance for one sample | Identify the source(s) and investigate the cause(s) of exceedance Prepare Notification of Exceedance within 24 hours Inform Contractor, IEC, Project Proponent and EPD whether the cause of exceedance is due to the Project Discuss with Contractor and IEC for remedial measures required Ensure remedial measures are properly implemented Repeat measurement to confirm finding if exceedance is due to the Project Increase monitoring frequency to daily if exceedance is due to the Project and continue until the monitoring results reduce to below limit level | Check monitoring data submitted by ETCheck Contractor's working methods | Take immediate action to avoid further exceedance Submit proposals for remedial measures to IEC Implement the agreed proposals Amend proposal if appropriate |
| Exceedance for two or more consecutive samples | Identify source(s) and investigate the cause(s) of exceedance Prepare Notification of Exceedance within 24 hours Inform Contractor, IEC, Project Proponent and EPD the causes & actions taken for the exceedances Discuss with Contractor and IEC for remedial measures required Ensure remedial measures are properly implemented Continue monitoring at daily intervals if exceedance is due to the Project If no exceedance for 3 consecutive days, cease additional monitoring If exceedance due to the Project continues, consider what portion of the work is responsible and stop that portion of work until the exceedance is abated | | Take immediate action to avoid further exceedance Submit proposals for remedial measures to IEC Implement the agreed proposals Resubmit proposals if problem still not under control |


ENVIRONMENTAL RESOURCES MANAGEMENT


GREEN VALLEY LANDFILL LTD.


Meteorological Data


Annex D4 Meteorological Data

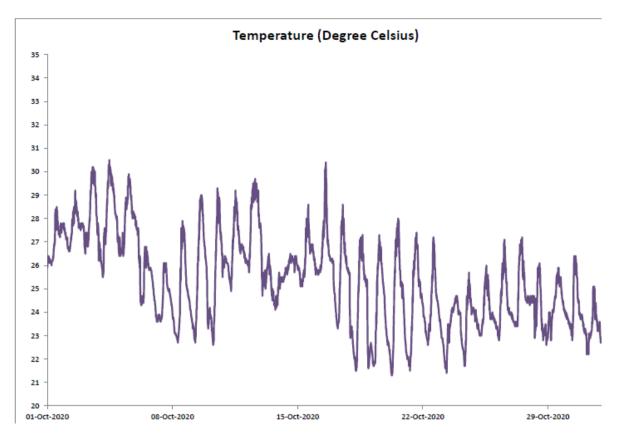


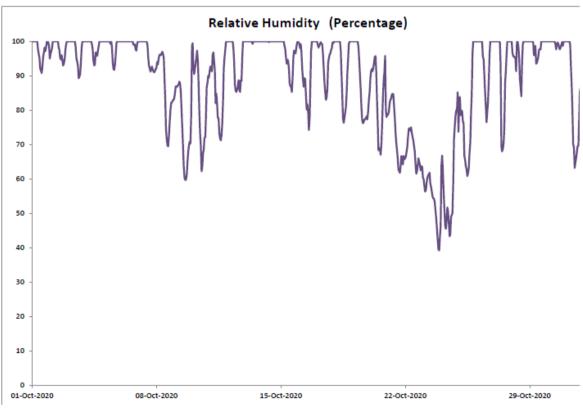


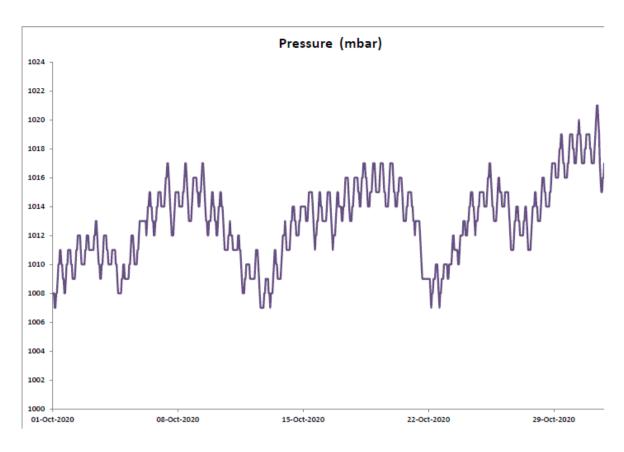

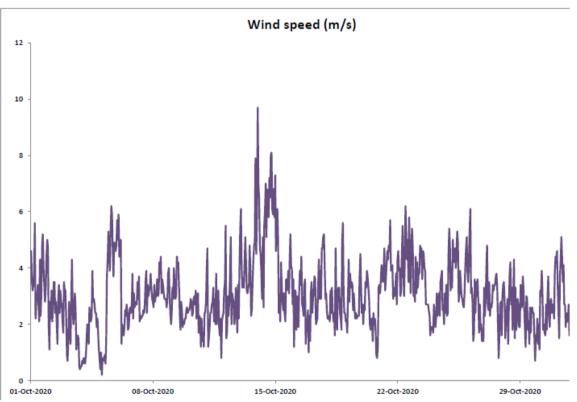

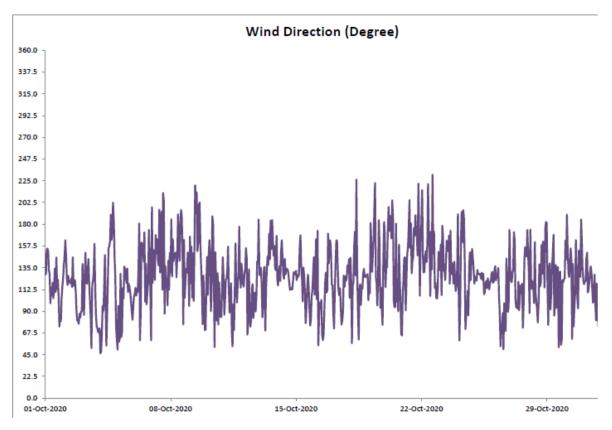

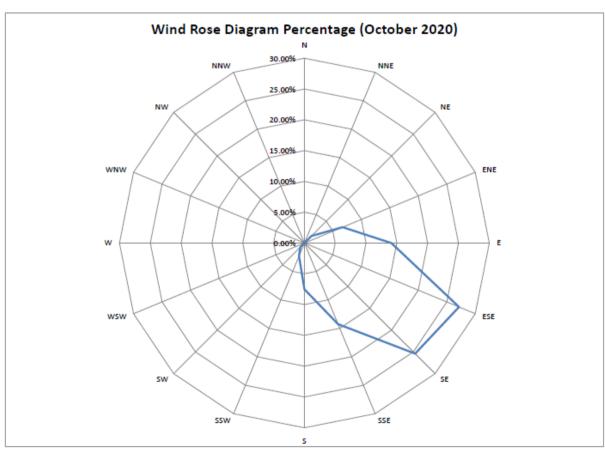

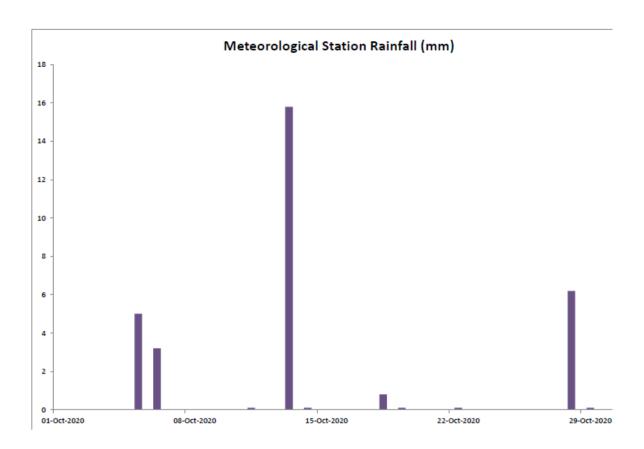

Annex E

Noise

Annex E1

Calibration Certificates for Noise Monitoring Equipment



輝創工程有限公司

Sun Creation Engineering Limited

Calibration & Testing Laboratory

Certificate of Calibration 校正證書

Certificate No.:

C204289

證書編號

ITEM TESTED / 送檢項目 (Job No. / 序引編號: IC20-1324)

Date of Receipt / 收件日期: 30 July 2020

Description / 儀器名稱

Sound Calibrator (EO086)

Manufacturer / 製造商

Rion

Model No. / 型號

NC-74 34657230

Serial No./編號 Supplied By / 委託者

Action-United Environmental Services and Consulting

Unit A, 20/F., Gold King Industrial Building, 35-41 Tai Lin Pai Road, Kwai Chung, N.T.

TEST CONDITIONS / 測試條件

Temperature / 温度 : $(23 \pm 2)^{\circ}$ C

Relative Humidity / 相對濕度 : $(50 \pm 25)\%$

Line Voltage / 電壓

TEST SPECIFICATIONS / 測試規範

Calibration check

DATE OF TEST / 測試日期

2 August 2020

TEST RESULTS / 測試結果

The results apply to the particular unit-under-test only.

The results do not exceed manufacturer's specification.

The results are detailed in the subsequent page(s).

The test equipment used for calibration are traceable to National Standards via:

- The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory
- The Bruel & Kjaer Calibration Laboratory, Denmark
- Agilent Technologies / Keysight Technologies
- Fluke Everett Service Center, USA

Tested By 測試

H T Wong

Assistant Engineer

Certified By

Date of Issue 簽發日期

3 August 2020

核證 Engineer

The test equipment used for calibration is traceable to the National Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior

written approval of this laboratory 本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。

Sun Creation Engineering Limited – Calibration & Testing, Laboratory c/o 4/F, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong 輝創工程有限公司 - 校正及檢測實驗所

c/o 香港新界屯門興安里一號四樓

Tel/電話: (852) 2927 2606

Fax/傳真: (852) 2744 8986 E-mail/電郵: callab@suncreation.com

Website/網址: www.suncreation.com



輝創工程有限公司

Sun Creation Engineering Limited

Calibration & Testing Laboratory

Certificate of Calibration 校正證書

Certificate No.:

C204289

證書編號

1. The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 12 hours before the commencement of the test.

2. The results presented are the mean of 3 measurements at each calibration point.

3. Test equipment:

Equipment ID CL130 CL281

TST150A

Description

Universal Counter

Measuring Amplifier

Multifunction Acoustic Calibrator

Certificate No.

C203952 CDK1806821 C201309

5. Results:

4.

5.1 Sound Level Accuracy

Test procedure: MA100N.

| 200000 | | | |
|---------------|----------------|-------------|-------------------------------|
| UUT | Measured Value | Mfr's Spec. | Uncertainty of Measured Value |
| Nominal Value | (dB) | (dB) | (dB) |
| 94 dB, 1 kHz | 94.1 | ± 0.3 | ± 0.2 |

5.2 Frequency Accuracy

| 1 requestey recentacy | | | |
|--------------------------|----------------|-------------|-------------------------------|
| UUT Nominal Value | Measured Value | Mfr's | Uncertainty of Measured Value |
| (kHz) | (kHz) | Spec. | (Hz) |
| 1 | 1 002 | 1 kHz + 1 % | + 1 |

Remark: The uncertainties are for a confidence probability of not less than 95 %.

Note

Only the original copy or the laboratory's certified true copy is valid.

The values given in this Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environment changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Sun Creation Engineering Limited shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration is traceable to the National Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。



Sun Creation Engineering Limited

Calibration & Testing Laboratory

Certificate of Calibration 校正證書

Certificate No.: C201348

證書編號

ITEM TESTED / 送檢項目 (Job No. / 序引編號: IC19-1098)

Date of Receipt / 收件日期: 27 February 2020

Description / 儀器名稱

Sound Level Calibrator (EQ085)

Manufacturer / 製造商 Model No. / 型號

Rion NC-73

Serial No. / 編號

10655561

Supplied By / 委託者

Action-United Environmental Services and Consulting

Unit A, 20/F., Gold King Industrial Building, 35-41 Tai Lin Pai Road, Kwai Chung, N.T.

TEST CONDITIONS / 測試條件

Temperature / 溫度 :

 $(23 \pm 2)^{\circ}$ C

Relative Humidity / 相對濕度 :

 $(50 \pm 25)\%$

Line Voltage / 電壓

TEST SPECIFICATIONS / 測試規範

Calibration check

DATE OF TEST / 測試日期

7 March 2020

TEST RESULTS / 測試結果

The results apply to the particular unit-under-test only.

The results do not exceed manufacturer's specification & user's specified acceptance criteria.

The results are detailed in the subsequent page(s).

The test equipment used for calibration are traceable to National Standards via:

- The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory
- The Bruel & Kjaer Calibration Laboratory, Denmark
- Agilent Technologies / Keysight Technologies
- Fluke Everett Service Center, USA

Tested By 測試

H T Wong

Technical Officer

Certified By 核證

K C Lee Engineer Date of Issue 簽發日期

10 March 2020

The test equipment used for calibration is traceable to the National Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laborator

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。



Sun Creation Engineering Limited

Calibration & Testing Laboratory

Certificate of Calibration 校正證書

Certificate No.: C201348

證書編號

1. The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 12 hours before the commencement of the test.

2. The results presented are the mean of 3 measurements at each calibration point.

3. Test equipment:

> Equipment ID CL130 CL281 TST150A

Description

Universal Counter

Measuring Amplifier

Multifunction Acoustic Calibrator

Certificate No. C193756 CDK1806821

C201309

4. Test procedure: MA100N.

5. Results:

5.1 Sound Level Accuracy

| UUT | Measured Value | Mfr's Spec. | Uncertainty of Measured Value |
|---------------|----------------|-------------|-------------------------------|
| Nominal Value | (dB) | (dB) | (dB) |
| 94 dB, 1 kHz | 94.2 | ± 0.5 | ± 0.2 |

Frequency Accuracy

| UUT Nominal Value | Measured Value | User's | Uncertainty of Measured Value |
|-------------------|----------------|-------------|-------------------------------|
| (kHz) | (kHz) | Spec. | (Hz) |
| 1 | 0.958 | 1 kHz ± 6 % | ± 1 |

Remarks: - The user's specified acceptance criteria (user's spec.) is a customer pre-defined operating tolerance of the UUT, suitable for one's own intended use.

- The uncertainties are for a confidence probability of not less than 95 %.

Only the original copy or the laboratory's certified true copy is valid.

The values given in this Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environment changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Sun Creation Engineering Limited shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration is traceable to the National Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory

Website/網址: www.suncreation.com

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。

Sun Creation Engineering Limited - Calibration & Testing Laboratory c/o 4/F, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong 輝創工程有限公司 - 校正及檢測實驗所 c/o 香港新界屯門興安里一號四樓 Tel/電話: (852) 2927 2606 Fax/傳真: (852) 2744 8986 E-mail/電郵: callab@suncreation.com



Sun Creation Engineering Limited

Calibration & Testing Laboratory

Certificate of Calibration 校正證書

Certificate No.:

C204359

證書編號

ITEM TESTED / 送檢項目 (Job No. / 序引編號: IC20-1324)

Date of Receipt / 收件日期: 30 July 2020

Description / 儀器名稱

Sound Level Meter (EQ013)

Manufacturer / 製造商

Rion

Model No. / 型號

NL-52 00921191

Serial No./編號 Supplied By / 委託者

Action-United Environmental Services and Consulting

Unit A, 20/F., Gold King Industrial Building, 35-41 Tai Lin Pai Road, Kwai Chung, N.T.

TEST CONDITIONS / 測試條件

Temperature / 温度 : $(23 \pm 2)^{\circ}$ C

Relative Humidity / 相對濕度 :

 $(50 \pm 25)\%$

Line Voltage / 電壓

TEST SPECIFICATIONS / 測試規範

Calibration check

DATE OF TEST / 測試日期

5 August 2020

TEST RESULTS / 測試結果

The results apply to the particular unit-under-test only.

The results do not exceed manufacturer's specification.

The results are detailed in the subsequent page(s).

The test equipment used for calibration are traceable to National Standards via:

- The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory
- The Bruel & Kjaer Calibration Laboratory, Denmark
- Agilent Technologies / Keysight Technologies
- Fluke Everett Service Center, USA

Tested By 測試

K P Cheuk

Assistant Engineer

Certified By 核證

K C Lee Engineer Date of Issue 簽發日期

11 August 2020

The test equipment used for calibration is traceable to the National Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。



Sun Creation Engineering Limited

Calibration & Testing Laboratory

Certificate of Calibration 校正證書

Certificate No.:

C204359

證書編號

1. The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 12 hours, and switched on to warm up for over 10 minutes before the commencement of the test.

- 2. Self-calibration was performed before the test.
- 3. The results presented are the mean of 3 measurements at each calibration point.
- 4. Test equipment:

Equipment ID CL280

Description

Certificate No.

CL280 CL281 40 MHz Arbitrary Waveform Generator Multifunction Acoustic Calibrator C200258

CDK1806821

5. Test procedure: MA101N.

- 6. Results:
- 6.1 Sound Pressure Level

6.1.1 Reference Sound Pressure Level

| UUT Setting | | | | Applied Value | | UUT | IEC 61672 |
|-------------|----------|-----------|-----------|---------------|-------|---------|---------------|
| Range | Function | Frequency | Time | Level | Freq. | Reading | Class 1 Spec. |
| (dB) | | Weighting | Weighting | (dB) | (kHz) | (dB) | (dB) |
| 30 - 130 | L_A | A | Fast | 94.00 | 1 | 93.6 | ± 1.1 |

6.1.2 Linearity

| | UU | Γ Setting | | Applie | d Value | UUT |
|----------|----------|-----------|-----------|--------|---------|-------------|
| Range | Function | Frequency | Time | Level | Freq. | Reading |
| (dB) | | Weighting | Weighting | (dB) | (kHz) | (dB) |
| 30 - 130 | L_{A} | A | Fast | 94.00 | 1 | 93.6 (Ref.) |
| | | | | 104.00 | | 103.6 |
| | | | | 114.00 | | 113.6 |

IEC 61672 Class 1 Spec. : \pm 0.6 dB per 10 dB step and \pm 1.1 dB for overall different.

6.2 Time Weighting

| | UUT Setting | | | Applied Value | | UUT | IEC 61672 |
|----------|-------------|-----------|-----------|---------------|-------|---------|---------------|
| Range | Function | Frequency | Time | Level | Freq. | Reading | Class 1 Spec. |
| (dB) | | Weighting | Weighting | (dB) | (kHz) | (dB) | (dB) |
| 30 - 130 | L_{A} | A | Fast | 94.00 | 1 | 93.6 | Ref. |
| | | | Slow | | | 93.6 | ± 0.3 |

The test equipment used for calibration is traceable to the National Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。

Sun Creation Engineering Limited – Calibration & Testing Laboratory c/o 4/F, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong 輝創工程有限公司 - 校正及檢測實驗所 c/o 香港新界屯門興安里一號四樓



Sun Creation Engineering Limited

Calibration & Testing Laboratory

Certificate of Calibration 校正證書

Certificate No.: C204359

證書編號

6.3 Frequency Weighting

A-Weighting 6.3.1

| 11 WOISHTINE | | | | | | | | | | |
|--------------|-------------|-----------|-----------|---------------|----------|---------|--------------------|--|--|--|
| | UUT Setting | | | Applied Value | | UUT | IEC 61672 | | | |
| Range | Function | Frequency | Time | Level | Freq. | Reading | Class 1 Spec. | | | |
| (dB) | | Weighting | Weighting | (dB) | | (dB) | (dB) | | | |
| 30 - 130 | L_{A} | A | Fast | 94.00 | 63 Hz | 67.3 | -26.2 ± 1.5 | | | |
| | | | | | 125 Hz | 77.4 | -16.1 ± 1.5 | | | |
| | | | | | 250 Hz | 84.9 | -8.6 ± 1.4 | | | |
| | | | | | 500 Hz | 90.3 | -3.2 ± 1.4 | | | |
| | | | | | 1 kHz | 93.6 | Ref. | | | |
| | | | | | 2 kHz | 94.8 | $+1.2 \pm 1.6$ | | | |
| | | | | | 4 kHz | 94.6 | $+1.0 \pm 1.6$ | | | |
| | | | | | 8 kHz | 92.5 | -1.1 (+2.1; -3.1) | | | |
| | | | | | 12.5 kHz | 89.1 | -4.3 (+3.0 ; -6.0) | | | |

6.3.2 C-Weighting

| | UUT | Setting | | Applied Value | | UUT | IEC 61672 |
|----------|----------|-----------|-----------|---------------|----------|---------|--------------------|
| Range | Function | Frequency | Time | Level | Freq. | Reading | Class 1 Spec. |
| (dB) | | Weighting | Weighting | (dB) | | (dB) | (dB) |
| 30 - 130 | L_{C} | С | Fast | 94.00 | 63 Hz | 92.8 | -0.8 ± 1.5 |
| | | | | | 125 Hz | 93.4 | -0.2 ± 1.5 |
| | | | | | 250 Hz | 93.6 | 0.0 ± 1.4 |
| | | | | | 500 Hz | 93.6 | 0.0 ± 1.4 |
| | | | | | 1 kHz | 93.6 | Ref. |
| | | | | | 2 kHz | 93.4 | -0.2 ± 1.6 |
| | | | | | 4 kHz | 92.8 | -0.8 ± 1.6 |
| | | | | | 8 kHz | 90.6 | -3.0 (+2.1; -3.1) |
| | | | | | 12.5 kHz | 87.2 | -6.2 (+3.0 ; -6.0) |

The test equipment used for calibration is traceable to the National Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。



Sun Creation Engineering Limited

Calibration & Testing Laboratory

Certificate of Calibration 校正證書

Certificate No.:

C204359

證書編號

Remarks: - UUT Microphone Model No.: UC-59 & S/N: 12910

- Mfr's Spec. : IEC 61672 Class 1

- Uncertainties of Applied Value:

94 dB : 63 Hz - 125 Hz $: \pm 0.35 \text{ dB}$

> 250 Hz - 500 Hz : \pm 0.30 dB 1 kHz $: \pm 0.20 \text{ dB}$ 2 kHz - 4 kHz $: \pm 0.35 \text{ dB}$ 8 kHz $: \pm 0.45 \text{ dB}$

12.5 kHz $: \pm 0.70 \text{ dB}$

104 dB: 1 kHz $: \pm 0.10 \text{ dB (Ref. 94 dB)}$ 114 dB: 1 kHz $: \pm 0.10 \text{ dB (Ref. 94 dB)}$

- The uncertainties are for a confidence probability of not less than 95 %.

Note:

Only the original copy or the laboratory's certified true copy is valid.

The values given in this Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environment changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Sun Creation Engineering Limited shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration is traceable to the National Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。



Sun Creation Engineering Limited

Calibration & Testing Laboratory

Certificate of Calibration 校正證書

Certificate No.:

C203574

證書編號

ITEM TESTED / 送檢項目 (Job No. / 序引編號: IC20-1324)

Date of Receipt / 收件日期: 19 June 2020

Description / 儀器名稱

Integrating Sound Level Meter (EQ009)

Manufacturer / 製造商

Brüel & Kjær

Model No. / 型號 Serial No. / 編號

2238 2285722

Supplied By / 委託者

Action-United Environmental Services and Consulting

Unit A, 20/F., Gold King Industrial Building, 35-41 Tai Lin Pai Road, Kwai Chung, N.T.

TEST CONDITIONS / 測試條件

Temperature / 温度 :

 $(23 \pm 2)^{\circ}$ C

Relative Humidity / 相對濕度 : $(50 \pm 25)\%$

Line Voltage / 電壓 :

TEST SPECIFICATIONS / 測試規範

Calibration check

DATE OF TEST / 測試日期

29 June 2020

TEST RESULTS / 測試結果

The results apply to the particular unit-under-test only.

The results do not exceed manufacturer's specification.

The results are detailed in the subsequent page(s).

The test equipment used for calibration are traceable to National Standards via:

- The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory
- The Bruel & Kjaer Calibration Laboratory, Denmark
- Agilent Technologies / Keysight Technologies
- Fluke Everett Service Center, USA

Tested By 測試

K P Cheuk Assistant Engineer

Certified By 核證

K C Lee Engineer Date of Issue

6 July 2020

簽發日期

The test equipment used for calibration is traceable to the National Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laborator

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。

Sun Creation Engineering Limited - Calibration & Testing Laboratory c/o 4/F, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong 輝創工程有限公司 - 校正及檢測實驗所 c/o 香港新界屯門興安里一號四樓

Tel/電話: (852) 2927 2606

Fax/傳真: (852) 2744 8986

E-mail/電郵: callab@suncreation.com

Website/網址: www.suncreation.com

Page 1 of 4



Sun Creation Engineering Limited

Calibration & Testing Laboratory

Certificate of Calibration 校正證書

Certificate No.:

C203574

證書編號

1. The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 12 hours, and switched on to warm up for over 10 minutes before the commencement of the test.

2. Self-calibration using laboratory acoustic calibrator was performed before the test from 6.1.1.2 to 6.4.

3. The results presented are the mean of 3 measurements at each calibration point.

4. Test equipment:

Equipment ID

Description

Certificate No.

CL280 CL281 40 MHz Arbitrary Waveform Generator

Multifunction Acoustic Calibrator

C200258

CDK1806821

5. Test procedure: MA101N.

6. Results:

6.1 Sound Pressure Level

6.1.1 Reference Sound Pressure Level

6.1.1.1 Before Self-calibration

| UUT Setting | | | | Applied | Value | UUT |
|-------------|-----------|-----------|-----------|---------|-------|---------|
| Range | Parameter | Frequency | Time | Level | Freq. | Reading |
| (dB) | | Weighting | Weighting | (dB) | (kHz) | (dB) |
| 52 - 132 | L_{AFP} | A | F | 94.00 | 1 | 93.8 |

6.1.1.2 After Self-calibration

| UUT Setting | | | | Applied Value | | UUT | IEC 60651 |
|-------------|-----------|-----------|-----------|---------------|-------|---------|--------------|
| Range | Parameter | Frequency | Time | Level | Freq. | Reading | Type 1 Spec. |
| (dB) | | Weighting | Weighting | (dB) | (kHz) | (dB) | (dB) |
| 52 - 132 | L_{AFP} | A | F | 94.00 | 1 | 94.0 | ± 0.7 |

6.1.2 Linearity

| | UU | Γ Setting | Applied | d Value | UUT | |
|----------|-----------|-----------|-----------|---------|-------|-------------|
| Range | Parameter | Frequency | Time | Level | Freq. | Reading |
| (dB) | | Weighting | Weighting | (dB) | (kHz) | (dB) |
| 52 - 132 | L_{AFP} | A | F | 94.00 | 1 | 94.0 (Ref.) |
| | | | | 104.00 | | 104.0 |
| | | | | 114.00 | | 114.0 |

IEC 60651 Type 1 Spec. : \pm 0.4 dB per 10 dB step and \pm 0.7 dB for overall different.

The test equipment used for calibration is traceable to the National Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。



Sun Creation Engineering Limited

Calibration & Testing Laboratory

Certificate of Calibration 校正證書

Certificate No.:

C203574

證書編號

6.2 Time Weighting

6.2.1 Continuous Signal

| COLLEGE | e envirage de Signar | | | | | | | | | | |
|----------|----------------------|---------------|-----------|-------|-----------|---------|--------------|--|--|--|--|
| | | Applied Value | | UUT | IEC 60651 | | | | | | |
| Range | Parameter | Frequency | Time | Level | Freq. | Reading | Type 1 Spec. | | | | |
| (dB) | | Weighting | Weighting | (dB) | (kHz) | (dB) | (dB) | | | | |
| 52 - 132 | L_{AFP} | A | F | 94.00 | 1 | 94.0 | Ref. | | | | |
| | L_{ASP} | | S | | | 94.0 | ± 0.1 | | | | |
| | L_{AIP} | | I | | | 94.1 | ± 0.1 | | | | |

6.2.2 Tone Burst Signal (2 kHz)

| | UUT Setting | | | | Applied Value | | IEC 60651 |
|----------|--------------------|-----------|-----------|-------|---------------|---------|----------------|
| Range | Parameter | Frequency | Time | Level | Burst | Reading | Type 1 Spec. |
| (dB) | | Weighting | Weighting | (dB) | Duration | (dB) | (dB) |
| 32 - 112 | L_{AFP} | A | F | 106.0 | Continuous | 106.0 | Ref. |
| | L _{AFMax} | | | | 200 ms | 105.0 | -1.0 ± 1.0 |
| | L_{ASP} | | S | | Continuous | 106.0 | Ref. |
| | L _{ASMax} | | | | 500 ms | 102.0 | -4.1 ± 1.0 |

6.3 Frequency Weighting

6.3.1 A-Weighting

| A- Weighting | , | | 11 Weighting | | | | | |
|--------------|-------------|-----------|--------------|---------------|----------|---------|--------------------|--|
| | UUT Setting | | | Applied Value | | UUT | IEC 60651 | |
| Range | Parameter | Frequency | Time | Level | Freq. | Reading | Type 1 Spec. | |
| (dB) | | Weighting | Weighting | (dB) | | (dB) | (dB) | |
| 52 - 132 | L_{AFP} | A | F | 94.00 | 31.5 Hz | 54.5 | -39.4 ± 1.5 | |
| | | | | | 63 Hz | 67.8 | -26.2 ± 1.5 | |
| | | | | | 125 Hz | 77.8 | -16.1 ± 1.0 | |
| | | | | | 250 Hz | 85.3 | -8.6 ± 1.0 | |
| | | | | | 500 Hz | 90.8 | -3.2 ± 1.0 | |
| | | | | | 1 kHz | 94.0 | Ref. | |
| | | | | | 2 kHz | 95.2 | $+1.2 \pm 1.0$ | |
| | | | | | 4 kHz | 95.0 | $+1.0 \pm 1.0$ | |
| | | | | | 8 kHz | 92.8 | -1.1 (+1.5 ; -3.0) | |
| | | | | | 12.5 kHz | 89.7 | -4.3 (+3.0 ; -6.0) | |

The test equipment used for calibration is traceable to the National Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。



Sun Creation Engineering Limited

Calibration & Testing Laboratory

Certificate of Calibration 校正證書

Certificate No.:

C203574

證書編號

6.3.2 C-Weighting

| | UUT Setting | | | Appl | ied Value | UUT | IEC 60651 |
|----------|-------------|-----------|-----------|-------|-----------|---------|--------------------|
| Range | Parameter | Frequency | Time | Level | Freq. | Reading | Type 1 Spec. |
| (dB) | | Weighting | Weighting | (dB) | | (dB) | (dB) |
| 52 - 132 | L_{CFP} | С | F | 94.00 | 31.5 Hz | 90.9 | -3.0 ± 1.5 |
| | | | | | 63 Hz | 93.2 | -0.8 ± 1.5 |
| | | | | | 125 Hz | 93.8 | -0.2 ± 1.0 |
| | | | | | 250 Hz | 94.0 | 0.0 ± 1.0 |
| | | | | | 500 Hz | 94.0 | 0.0 ± 1.0 |
| | | | | | 1 kHz | 94.0 | Ref. |
| | | | | | 2 kHz | 93.8 | -0.2 ± 1.0 |
| | | | | | 4 kHz | 93.2 | -0.8 ± 1.0 |
| | | | | | 8 kHz | 90.9 | -3.0 (+1.5 ; -3.0) |
| | | | | | 12.5 kHz | 87.8 | -6.2 (+3.0 ; -6.0) |

6.4 Time Averaging

| | UUT | Setting | | Applied Value | | | UUT | IEC 60804 | | |
|----------|-----------|-----------|-------------|---------------|----------|-------------------|-------|------------|---------|--------|
| Range | Parameter | Frequency | Integrating | Frequency | Burst | Burst | Burst | Equivalent | Reading | Type 1 |
| (dB) | | Weighting | Time | (kHz) | Duration | Duty | Level | Level | (dB) | Spec. |
| | | | | | (ms) | Factor | (dB) | (dB) | | (dB) |
| 32 - 112 | L_{Aeq} | A | 10 sec. | 4 | 1 | 1/10 | 110.0 | 100 | 99.9 | ± 0.5 |
| | | | | | | 1/10 ² | | 90 | 89.6 | ± 0.5 |
| | | | 60 sec. | | | 1/10 ³ | | 80 | 79.1 | ± 1.0 |
| | | | 5 min. | | | 1/104 | | 70 | 69.2 | ± 1.0 |

- UUT Microphone Model No. : 4188 & S/N : 2812706 Remarks:

- Mfr's Spec. : IEC 60651 Type 1 & IEC 60804 Type 1

- Uncertainties of Applied Value: 94 dB : 31.5 Hz - 125 Hz : $\pm 0.35 \text{ dB}$

250 Hz - 500 Hz : \pm 0.30 dB 1 kHz : $\pm~0.20~dB$ 2 kHz - 4 kHz $: \pm 0.35 \text{ dB}$ $:\pm 0.45 \text{ dB}$ 8 kHz $: \pm 0.70 \text{ dB}$

12.5 kHz 104 dB: 1 kHz $: \pm 0.10 \text{ dB (Ref. 94 dB)}$ 114 dB: 1 kHz $\pm 0.10 \text{ dB (Ref. 94 dB)}$

Burst equivalent level $: \pm 0.2 \text{ dB}$ (Ref. 110 dB) continuous sound level)

- The uncertainties are for a confidence probability of not less than 95 %.

Only the original copy or the laboratory's certified true copy is valid.

The values given in this Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environment changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Sun Creation Engineering Limited shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration is traceable to the National Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。

Sun Creation Engineering Limited - Calibration & Testing, Laboratory c/o 4/F, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong 輝創工程有限公司 - 校正及檢測實驗所 c/o 香港新界屯門興安里一號四樓

Annex E2


Noise Monitoring Results

Table E2.1 Measured Noise Levels (dB(A)) at NM1 during Normal Working Hours (0700-1900 hours; Normal Weekdays)

| Date | Start Time | Finish Time | Weather | L _{10 (30min)} | L _{90 (30min)} | Leq (30min) |
|-----------|------------|-------------|---------|-------------------------|-------------------------|-------------|
| 7 Oct 20 | 14:56 | 15:26 | Sunny | 53.5 | 50.0 | 52.3 |
| 15 Oct 20 | 15:08 | 15:38 | Sunny | 52.5 | 48.0 | 51.1 |
| 21 Oct 20 | 14:07 | 14:37 | Sunny | 57.9 | 52.7 | 55.8 |
| 29 Oct 20 | 14:36 | 15:06 | Cloudy | 56.3 | 48.8 | 53.3 |
| | | | | | Average | e 53.1 |
| | | | | | Mir | n 51.1 |
| | | | | | Max | x 55.8 |
| Note: | | | | | | |

Correction of +3 dB(A) was made for free field measurements.

Figure E2.1 Graphical Presentation for Noise Monitoring at NM1

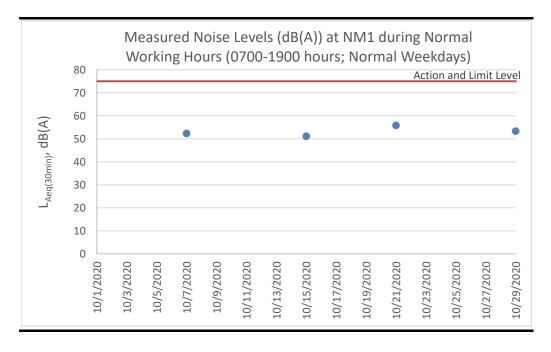

Annex E3

Event and Action Plan for Noise Monitoring

Annex E3 Event and Action Plan for Construction Noise

| Event | | Action | |
|-----------------|---|--|--|
| | ET | IEC | Contractor |
| Action Level | Identify the source(s) and investigate the cause(s) of exceedance and complaint Prepare Notification of Exceedance within 24 hours Inform Contractor, IEC and Project Proponent whether the cause of exceedance is due to the Project Discuss with Contractor and IEC for remedial measures required Ensure remedial measures are properly implemented Have additional monitoring if exceedance is due to the Project. If exceedance stops, cease additional monitoring | Verify the Notification of Exceedance Check monitoring data submitted by ET Discuss with ET and Contractor on proposed remedial measures Review proposals on remedial measures Audit the implementation of the remedial measures Audit the effectiveness of the implemented remedial measures | Submit proposals for remedial measures to IEC Implement the agreed proposals |
| Limit Level | Identify the source(s) and investigate the cause(s) of exceedance and complaint Prepare Notification of Exceedance within 24 hours Inform Contractor, IEC, Project Proponent and EPD whether the cause of exceedance is due to the Project Analyse the operation of SENTX and investigate the causes of exceedance Provide interim report to Contractor, IEC, Project Proponent and EPD the causes of the exceedances Discuss with Contractor and IEC for remedial measures required Ensure remedial measures are properly implemented Report the remedial measures implemented and the additional monitoring results to Contactor, IEC, Project Proponent and EPD Have additional monitoring if exceedance is due to the Project. If exceedance stops, cease additional monitoring | Verify the Notification of Exceedance Check monitoring data submitted by ET Discuss with ET and Contractor on proposed remedial measures Review proposals on remedial measures Audit the implementation of the remedial measures Audit the effectiveness of the implemented remedial measures | Take immediate measures to avoid further exceedance Submit proposals for remedial measures to IEC within 3 working days of notification Implement the agreed proposals Resubmit proposals if problem still not under control Stop the relevant activity of works as determined by the Project Proponent until the exceedance is abated |

Annex F

Surface Water Quality

Annex F1

Calibration Certificates for Surface Water Quality Monitoring Equipment



ALS Technichem (HK) Pty Ltd

11/F, Chung Shun Knitting Centre 1-3 Wing Yip Street, Kwai Chung N.T., Hong Kong

T: +852 2610 1044 | F: +852 2610 2021

REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION

CONTACT: BEN TAM WORK ORDER: HK2031198

CLIENT: ACTION UNITED ENVIRONMENT SERVICES AND

CONSULTING

ADDRESS: RM A 20/F., GOLD KING IND BLDG, SUB-BATCH: 0

NO. 35-41 TAI LIN PAI ROAD,

KWAI CHUNG, N.T. HONG KONG

DATE RECEIVED: 18-Aug-2020

DATE OF ISSUE: 24-Aug-2020

SPECIFIC COMMENTS

Equipment information (Brand name, Model No., Serial No. and Equipment No.) is provided by client.

The performance of the equipment stated in this report is checked with independent reference material and results compared against a calibrated secondary source.

The "Tolerance Limit" quoted is the acceptance criteria applicable for similar equipment used by the laboratory or quoted from relevant international standards.

The "Next Calibration Date" is recommended according to best practice principle as practised by the laboratory or quoted from relevant international standards.

The validity of equipment/ meter performance only applies to the result(s) stated in the report.

Equipment Type: Multifunctional Meter Service Nature: Performance Check

Scope: Conductivity, Dissolved Oxygen, pH Value, Turbidity, Salinity and Temperature

Brand Name/ Model No.: YSI Professional DSS

Serial No./ Equipment No.: 17B102764/17B100758 (EQW019)

Date of Calibration: 24-August-2020

GENERAL COMMENTS

This is the Final Report and supersedes any preliminary report with this batch number.

Ms. Lin Wai Yu, Iris

Assistant Manager - Inorganic

This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.

WORK ORDER: HK2031198

SUB-BATCH: (

DATE OF ISSUE: 24-Aug-2020

CLIENT: ACTION UNITED ENVIRONMENT SERVICES AND CONSULTING

Equipment Type: Multifunctional Meter

Brand Name/ Model No.:

YSI Professional DSS

Serial No./ Equipment No.:

17B102764/17B100758 (EQW019)

Date of Calibration: 24-August-2020 Date of Next Calibration: 24-November-2020

PARAMETERS:

Conductivity Method Ref: APHA (21st edition), 2510B

| Expected Reading (µS/cm) | Displayed Reading (μS/cm) | Tolerance (%) |
|--------------------------|---------------------------|---------------|
| 146.9 | 153.6 | +4.6 |
| 6667 | 6973 | +4.6 |
| 12890 | 13340 | +3.5 |
| 58670 | 61031 | +4.0 |
| | Tolerance Limit (%) | ±10.0 |

Dissolved Oxygen

Method Ref: APHA (21st edition), 45000: G

| Expected Reading (mg/L) | Displayed Reading (mg/L) | Tolerance (mg/L) |
|-------------------------|--------------------------|------------------|
| 3.72 | 3.82 | +0.10 |
| 5.39 | 5.44 | +0.05 |
| 7.33 | 7.29 | -0.04 |
| | Tolerance Limit (mg/L) | ±0.20 |

pH Value Method Ref: APHA (21st edition), 4500H: B

| Expected Reading (pH unit) | Displayed Reading (pH unit) | Tolerance (pH unit) |
|----------------------------|-----------------------------|---------------------|
| 4.0 | 4.04 | +0.04 |
| 7.0 | 7.08 | +0.08 |
| 10.0 | 10.08 | +0.08 |
| | Tolerance Limit (pH unit) | ±0.20 |

Remark: "Displayed Reading" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.

Ms. Lin Wai Yu, Iris

WORK ORDER: HK2031198

SUB-BATCH: 0

DATE OF ISSUE: 24-Aug-2020

CLIENT: ACTION UNITED ENVIRONMENT SERVICES AND CONSULTING

Equipment Type: Multifunctional Meter

Brand Name/ Model No.:

YSI Professional DSS

Serial No./ Equipment No.:

17B102764/17B100758 (EQW019)

Date of Calibration: 24-August-2020 Date of Next Calibration: 24-November-2020

PARAMETERS:

Turbidity Method Ref: APHA (21st edition), 2130B

| Expected Reading (NTU) | Displayed Reading (NTU) | Tolerance (%) |
|------------------------|-------------------------|---------------|
| 0 | 0.82 | |
| 4 | 4.21 | +5.3 |
| 40 | 41.52 | +3.8 |
| 80 | 83.91 | +4.9 |
| 400 | 403.92 | +1.0 |
| 800 | 789.93 | -1.3 |
| | Tolerance Limit (%) | ±10.0 |

Salinity Method Ref: APHA (21st edition), 2520B

| Expected Reading (ppt) | Displayed Reading (ppt) | Tolerance (%) |
|------------------------|-------------------------|---------------|
| 0 | 0.00 | |
| 10 | 10.06 | +0.6 |
| 20 | 21.29 | +6.5 |
| 30 | 31.36 | +4.5 |
| | Tolerance Limit (%) | ±10.0 |

Remark: "Displayed Reading" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.

Ms. Lin Wai Yu, Iris

WORK ORDER: HK2031198

SUB-BATCH: C

DATE OF ISSUE: 24-Aug-2020

CLIENT: ACTION UNITED ENVIRONMENT SERVICES AND CONSULTING

Equipment Type: Multifunctional Meter

Brand Name/ Model No.:

YSI Professional DSS

Serial No./ Equipment No.: 17B102764/17B100758 (EQW019)

Date of Calibration: 24-August-2020 Date of Next Calibration: 24-November-2020

PARAMETERS:

Temperature Method Ref: Section 6 of International Accreditation New Zealand Technical

Guide No. 3 Second edition March 2008: Working Thermometer Calibration Procedure.

| Expected Reading (°C) | Displayed Reading (°C) | Tolerance (°C) |
|-----------------------|------------------------|----------------|
| 10.5 | 10.7 | +0.2 |
| 20.5 | 20.8 | +0.3 |
| 39.5 | 39.8 | +0.3 |
| | Tolerance Limit (°C) | ±2.0 |

Remark: "Displayed Reading" presents the figures shown on item under calibration / checking regardless

of equipment precision or significant figures.

16:3

Ms. Lin Wai Yu, Iris



ALS Technichem (HK) Pty Ltd

11/F, Chung Shun Knitting Centre 1-3 Wing Yip Street, Kwai Chung N.T., Hong Kong

T: +852 2610 1044 | F: +852 2610 2021

REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION

CONTACT: BEN TAM WORK ORDER: HK2037835

CLIENT: ACTION UNITED ENVIRONMENT SERVICES AND

CONSULTING

ADDRESS: RM A 20/F., GOLD KING IND BLDG, SUB-BATCH:

NO. 35-41 TAI LIN PAI ROAD,

KWAI CHUNG, N.T. HONG KONG

DATE RECEIVED: 06-Oct-2020

DATE OF ISSUE: 14-Oct-2020

SPECIFIC COMMENTS

Equipment information (Brand name, Model No., Serial No. and Equipment No.) is provided by client.

The performance of the equipment stated in this report is checked with independent reference material and results compared against a calibrated secondary source.

The "Tolerance Limit" quoted is the acceptance criteria applicable for similar equipment used by the laboratory or quoted from relevant international standards.

The "Next Calibration Date" is recommended according to best practice principle as practised by the laboratory or quoted from relevant international standards.

The validity of equipment/ meter performance only applies to the result(s) stated in the report.

Equipment Type: pH meter

Service Nature: Performance Check

Scope: pH Value and Temperature

Brand Name/ Model No.: AZ8685 Serial No./ Equipment No.: 1259868

Date of Calibration: 12-October-2020

GENERAL COMMENTS

This is the Final Report and supersedes any preliminary report with this batch number.

1:5

Ms. Lin Wai Yu, Iris

Assistant Manager - Inorganic

 $This\ report\ may\ not\ be\ reproduced\ except\ with\ prior\ written\ approval\ from\ ALS\ Technichem\ (HK)\ Pty\ Ltd.$

WORK ORDER: HK2037835

SUB-BATCH: 0

DATE OF ISSUE: 14-Oct-2020

CLIENT: ACTION UNITED ENVIRONMENT SERVICES AND CONSULTING

Equipment Type: Brand Name/ pH meter

Model No.:

AZ8685

Serial No./ Equipment No.:

1259868

Date of Calibration:

12-October-2020

Date of Next Calibration:

12-January-2021

PARAMETERS:

pH Value Method Ref: APHA (21st edition), 4500H: B

| Expected Reading (pH unit) | Displayed Reading (pH unit) | Tolerance (pH unit) |
|----------------------------|-----------------------------|---------------------|
| 4.0 | 4.1 | +0.10 |
| 7.0 | 6.9 | -0.10 |
| 10.0 | 9.9 | -0.10 |
| | Tolerance Limit (pH unit) | ±0.20 |

Temperature

Method Ref: Section 6 of International Accreditation New Zealand Technical

Guide No. 3 Second edition March 2008: Working Thermometer Calibration Procedure.

| Expected Reading (°C) | Displayed Reading (°C) | Tolerance (°C) |
|-----------------------|------------------------|----------------|
| 10.5 | 10.6 | +0.1 |
| 20.5 | 20.8 | +0.3 |
| 39.0 | 39.1 | +0.1 |
| | Tolerance Limit (°C) | ±2.0 |

Remark: "Displayed Reading" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.

Ms. Lin Wai Yu, Iris

Annex F2

Surface Water Quality Monitoring Results

Table F2.1 Surface Water Quality Monitoring Results at DP4T

| Condition | Appearance | Condition | Temperature | (DO) | = | | |
|-----------|---|-----------------|--|--|--|--|---|
| | | | Temperature | Oxygen (DO) | | Solids (SS) | |
| | | | (°C) | (mg/L) | | (mg/L) | |
| 9 Sunny | | Unable to o | collect water sam | ple due to insuff | icient flow | | - |
| 0 Sunny | | Unable to o | collect water sam | ple due to insuffi | icient flow | | - |
| 5 Sunny | Unable to collect water sample due to insufficient flow | | | icient flow | | - | |
| 6 Cloudy | | Unable to o | collect water sam | ple due to insuffi | icient flow | | - |
| | | | Average | : - | - | - | - |
| | | | Min | · - | - | - | - |
| | | | Max | · - | - | - | - |
| 5 6 | Sunny Cloudy | Sunny Cloudy | Sunny Unable to a Sunny Unable to a Cloudy Unable to a Sun Una | Sunny Unable to collect water sam Sunny Unable to collect water sam Cloudy Unable to collect water sam Average Min Max | Sunny Unable to collect water sample due to insuffice Sunny Unable to collect water sample due to insuffice Unable to collect water sample due to insuffice Sunny Unable to collect water sample due to insuffice Sunny Average - Min - Max - | Sunny Sunny Unable to collect water sample due to insufficient flow Unable to collect water sample due to insufficient flow Unable to collect water sample due to insufficient flow Average Min Max | Sunny Unable to collect water sample due to insufficient flow Unable to collect water sample due to insufficient flow Cloudy Unable to collect water sample due to insufficient flow Average Min |

Table F2.2 Surface Water Quality Monitoring Results at DP6

| Date | Time | Weather | Water | Water | Water | Dissolved | pН | Suspended | Remarks |
|-----------|-------|-----------|--------------|------------|-------------------|-------------------|-------------|-------------|-----------------|
| | | Condition | Appearance | Condition | Temperature | Oxygen (DO) | | Solids (SS) | |
| | | | | | (°C) | (mg/L) | | (mg/L) | |
| 7 Oct 20 | 14:18 | Sunny | | Unable to | collect water sam | ple due to insuff | icient flow | | - |
| 15 Oct 20 | 14:12 | Sunny | Light yellow | Semi clear | 25.8 | 8.33 | 7.60 | 18.6 | - |
| 15 Oct 20 | 14:26 | Sunny | Light yellow | Semi clear | 25.9 | 8.38 | 7.70 | 18.3 | DP6 (Duplicate) |
| 21 Oct 20 | 13:52 | Sunny | | Unable to | collect water sam | ple due to insuff | icient flow | | - |
| 29 Oct 20 | 14:24 | Cloudy | | Unable to | collect water sam | ple due to insuff | icient flow | | - |
| | | | | | Average | 8.36 | 7.65 | 18.5 | - |
| | | | | | Min | 8.33 | 7.60 | 18.3 | - |
| | | | | | Max | 8.38 | 7.70 | 18.6 | - |

Figure F2.1 Graphical Presentation for Surface Water Quality Monitoring (DO)

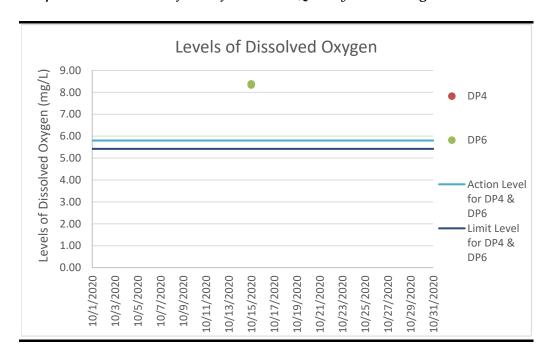


Figure F2.2 Graphical Presentation for Surface Water Quality Monitoring (pH)


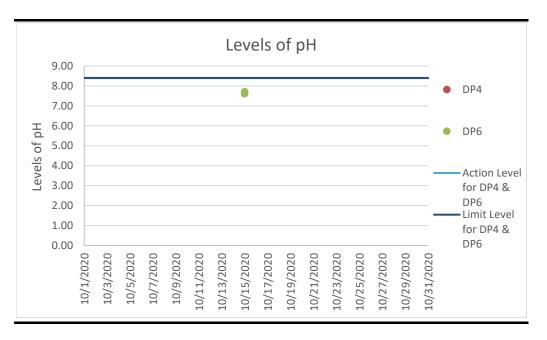


Figure F2.3 Graphical Presentation for Surface Water Quality Monitoring (SS)

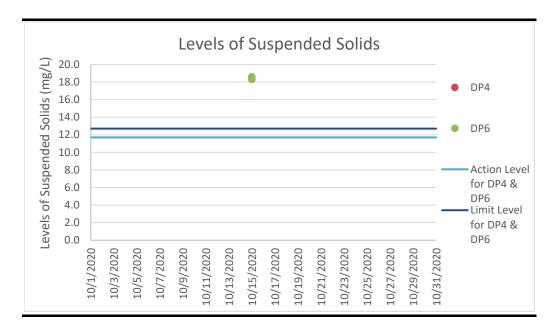

Annex F3

Event and Action Plan for Surface Water Quality Monitoring

Annex F3 Event and Action Plan for Surface Water Quality During Construction Phase

| Event | Action | | | | | | |
|--|--|---|--|--|--|--|--|
| | ET | IEC | Contractor | | | | |
| Action Level being exceeded by one sampling day | Repeat <i>in situ</i> measurement to confirm findings Identify the source(s) and investigate the cause(s) of exceedance Prepare Notification of Exceedance within 24 hours Inform Contractor, IEC and Project Proponent whether the cause of exceedance is due to the Project Repeat measurement on the next day of exceedance if exceedance is due to the Project | Verify the Notification of Exceedance Check monitoring data submitted by ET Check Contractor's working methods | Rectify any unacceptable practice Amend working methods if appropriate | | | | |
| Action Level being exceeded by two consecutive sampling days | Repeat <i>in situ</i> measurement to confirm findings Identify the source(s) and investigate the cause(s) of exceedance Prepare Notification of Exceedance within 24 hours Inform Contractor, IEC and Project Proponent whether the cause of exceedance is due to the Project Discuss with Contractor and IEC for remedial measures required Ensure remedial measures are properly implemented Increase the monitoring frequency to daily if exceedance is due to the Project and continue until no exceedance of Action Level | Verify the Notification of Exceedance Check monitoring data submitted by ET Check Contractor's working methods Discuss with ET Leader and Contractor on proposed remedial measures Review proposals on remedial measures Audit the implementation of the remedial measures Audit the effectiveness of the implemented remedial measures | Submit proposals for remedial measures to IEC Implement the agreed proposals Amend proposal if appropriate | | | | |

| Event | Action | | | | | | |
|---|---|--|--|--|--|--|--|
| | ET | IEC | Contractor | | | | |
| Limit Level being exceeded by two consecutive sampling days | Repeat <i>in situ</i> measurement to confirm findings Identify source(s) of impact and cause(s) of exceedance Prepare the Notification of Exceedance within 24 hours Inform Contractor, IEC, Project Proponent and EPD whether the cause of exceedance is due to the Project Discuss with Contractor and IEC for remedial measures required Ensure remedial measures are properly implemented Increase the monitoring frequency to daily if exceedance is due to the Project until no exceedance of Limit Level | Verify the Notification of Exceedance Check monitoring data submitted by ET Check Contractor's working methods Discuss with ET and Contractor on proposed remedial measures Review proposals on remedial measures Audit the implementation of the remedial measures Audit the effectiveness of the implemented remedial measures | Critically review the working methods Rectify unacceptable practice Check all plant and equipment Consider changes of working methods Discuss with the ET and IEC and propose mitigation measures to the IEC Implement the agreed mitigation measures | | | | |
| Limit Level being exceeded by more than two consecutive sampling days | Repeat <i>in situ</i> measurement to confirm findings Identify source(s) of impact and cause(s) of exceedance Prepare the Notification of Exceedance within 24 hours Inform Contractor, IEC, Project Proponent and EPD whether the cause of exceedance is due to the Project Check monitoring data, all plant, equipment and Contractor's working methods Discuss with Contractor and IEC for remedial measures required Ensure mitigation measures are implemented Increase the monitoring frequency to daily if exceedance is due to the Project until no exceedance of Limit Level for two consecutive days | Verify the Notification of Exceedance Check monitoring data submitted by ET Check Contractor's working methods Discuss with ET and Contractor on proposed remedial measures Review proposals on remedial measures Audit the implementation of the remedial measures Audit the effectiveness of the implemented remedial measures | Critically review the working methods Rectify unacceptable practice Check all plant and equipment Consider changes of working methods Discuss with the ET and IEC and propose mitigation measures Implement the agreed mitigation measure As directed by the Project Proponent, slow down or stop all or part of the construction activities | | | | |

ENVIRONMENTAL RESOURCES MANAGEMENT

GREEN VALLEY LANDFILL LTD.

Annex F4

Investigation Reports of Environmental Quality Limit Exceedance

Investigation Report of Environmental Quality Limit Exceedance

| Project | South East New Territories (SENT) Landfill Extension |
|--------------------------|---|
| Date | 15 October 2020 |
| Time | 14:12 and 14:26 (Duplicate) |
| Monitoring Location | DP6 |
| Parameter | Surface Water (Suspended Solids (SS)) |
| Action / Limit Levels | Action level: >11.7 mg/L |
| · | Limit level: >12.7 mg/L |
| Measured Level | DP6: 18.6 mg/L |
| | DP6 (Duplicate): 18.3 mg/L |
| Possible reason | No works which may lead to potential SS increase (e.g. active stockpiling and excavation works) was conducted in the vicinity of surface water channel leading to DP6 on the sampling day based on on-site observations and construction activities described by the Contractor. During the sampling event, no potential surface water overflow to the DP6 channel was observed. Silt fencing was constructed along the DP6 channel to minimise SS runoff to the channel. Surface runoff collected at DP6 channel was treated by the Wetsep prior to discharge. Environmental deficiency was not observed during the weekly site inspection in the morning. The Contractor has taken the necessary control / mitigation measures outlined in the updated EM&A Manual. From the on-site rainfall record of October 2020, heavy rainfall event was recorded on 13 October 2020. No. 8 tropical cyclone signal was also issued by the Hong Kong Observatory on 13 October 2020. During the sampling event, no raining was recorded and no other sources (e.g. Clearwater Bay Country Park, other project sites) was identified in the vicinity of surface water channel leading to DP6 which might cause the SS exceedance at DP6. Contaminated runoff from the haul road and other unpaved areas during the previous rainfall events could be the potential source of SS contributing to the exceedance. The SS exceedance at DP6 was therefore deemed to Project-related activities. It should be noted that although the measured SS level exceeded the limit level of the EM&A programme, it is still well within the WPCO effluent discharge limit of SS for the Junk Bay Water Control Zone (30 mg/L). The discharge of surface water with this SS level from DP6 will not cause adverse water quality impact to the Junk Bay Water Control Zone. |
| Action Taken / Action to | Examination of environmental performance of the Project will be |
| be Taken | continued during the weekly inspections. The Contractor is |

| | reminded to implement relevant and appropriate mitigation measures according to the updated EM&A Manual to avoid any exceedance of the Action and Limit Level. In addition, the Contractor is reminded to compact the exposed soil at the site to minimise SS runoff. |
|---------|---|
| Remarks | - |

Prepared by: Abbey Lau
Designation: Environmental Team
Date: 4 November 2020

Annex G

Cumulative Statistics on Exceedances, Environmental Complaints, Notification of Summons and Status of Prosecutions

 Table G1
 Cumulative Statistics on Exceedances

| | | Total No. recorded in this reporting period | Total No. recorded since project commencement |
|-------------------------|--------|---|---|
| Air Quality (24-hr TSP) | Action | 0 | 0 |
| | Limit | 0 | 0 |
| Noise | Action | 0 | 0 |
| | Limit | 0 | 0 |
| Surface Water Quality | Action | 0 | 0 |
| | Limit | 1 | 47 |

Table G2 Cumulative Statistics on Complaints, Notifications of Summons and Successful Prosecutions

| Reporting Period | Cumulative Statistics | | | | |
|---|-----------------------|--------------------------|--------------|--|--|
| | Complaints | Notifications of Summons | Prosecutions | | |
| This Reporting Period (1 – 31 October 2020) | 0 | 0 | 0 | | |
| Total no. received since project commencement | 1 | 0 | 0 | | |

Annex H

Monitoring Schedule for the Next Reporting Period

South East New Territories (SENT) Landfill Extension EM&A Impact Monitoring Schedule during Construction Phase

November 2020

| Sun | Mon | Tue | Wed | Thu | Fri | Sat |
|-----|-----------------|-----------------|-------------------------------|-------------------------------|------------------------|-----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 |
| | | | | Surface Water Monitoring (pm) | Dust Monitoring | |
| | | | | Noise Monitoring (pm) | | |
| | | | | | | |
| 8 | 9 | 10 | 11 | 12 | 13 | 14 |
| | | | | Surface Water Monitoring (pm) | | |
| | | | | Noise Monitoring (pm) | | |
| | | | | Dust Monitoring | | |
| 15 | 16 | 17 | 18 | 19 | 20 | 21 |
| | | | Dust Monitoring | Surface Water Monitoring (pm) | | |
| | | | | Noise Monitoring (pm) | | |
| | | | | | | |
| 22 | 23 | 24 | 25 | 26 | 27 | 28 |
| | | Dust Monitoring | Surface Water Monitoring (pm) | | | |
| | | | Noise Monitoring (pm) | | | |
| | | | | | | |
| 29 | 30 | | | | | |
| | Dust Monitoring | | | | | |
| | | | | | | |
| | | | | | | |

Note:

Impact dust monitoring will be conducted at two monitoring stations (DM1 and DM2) under the on-going EM&A programme TKO Area 137 Fill Bank and the results will be shared with SENTX.