



LEGEND

----- PROPOSED TCR IMPROVEMENT WORKS

Mitigation Measure

- CM1 Works areas to be confined to the Limit of the Road Works Areas to minimise impacts on existing features
- CM2 Retention and protection of topography and rock outcrops
- CM3 Retention and protection of existing stream courses
- CM4 Retention and protection of existing secondary woodland
- CM5 Retention and protection of existing plantation woodland
- CM6 Retention and protection of existing shrubland
- CM7 Decorative hoarding along publicly accessible boundaries of the site.
- CM8 Where trees are affected by the works, those specimens that are both of high conservation/amenity value and also stand a high chance of successful reestablishment should be transplanted to other locations within the works limit
- CM9 Topsoil stripped and stored for re-use in the construction of the soft landscape works
- CM10 Grass hydroseeding of slopes within 3 weeks of completion

NOTE :
CM7 - CM10 NOT SPECIFICALLY SHOWN AS IT RELATES TO THE WHOLE STUDY CORRIDOR

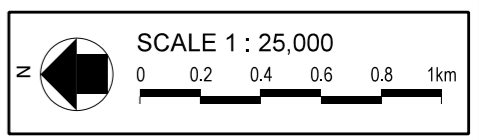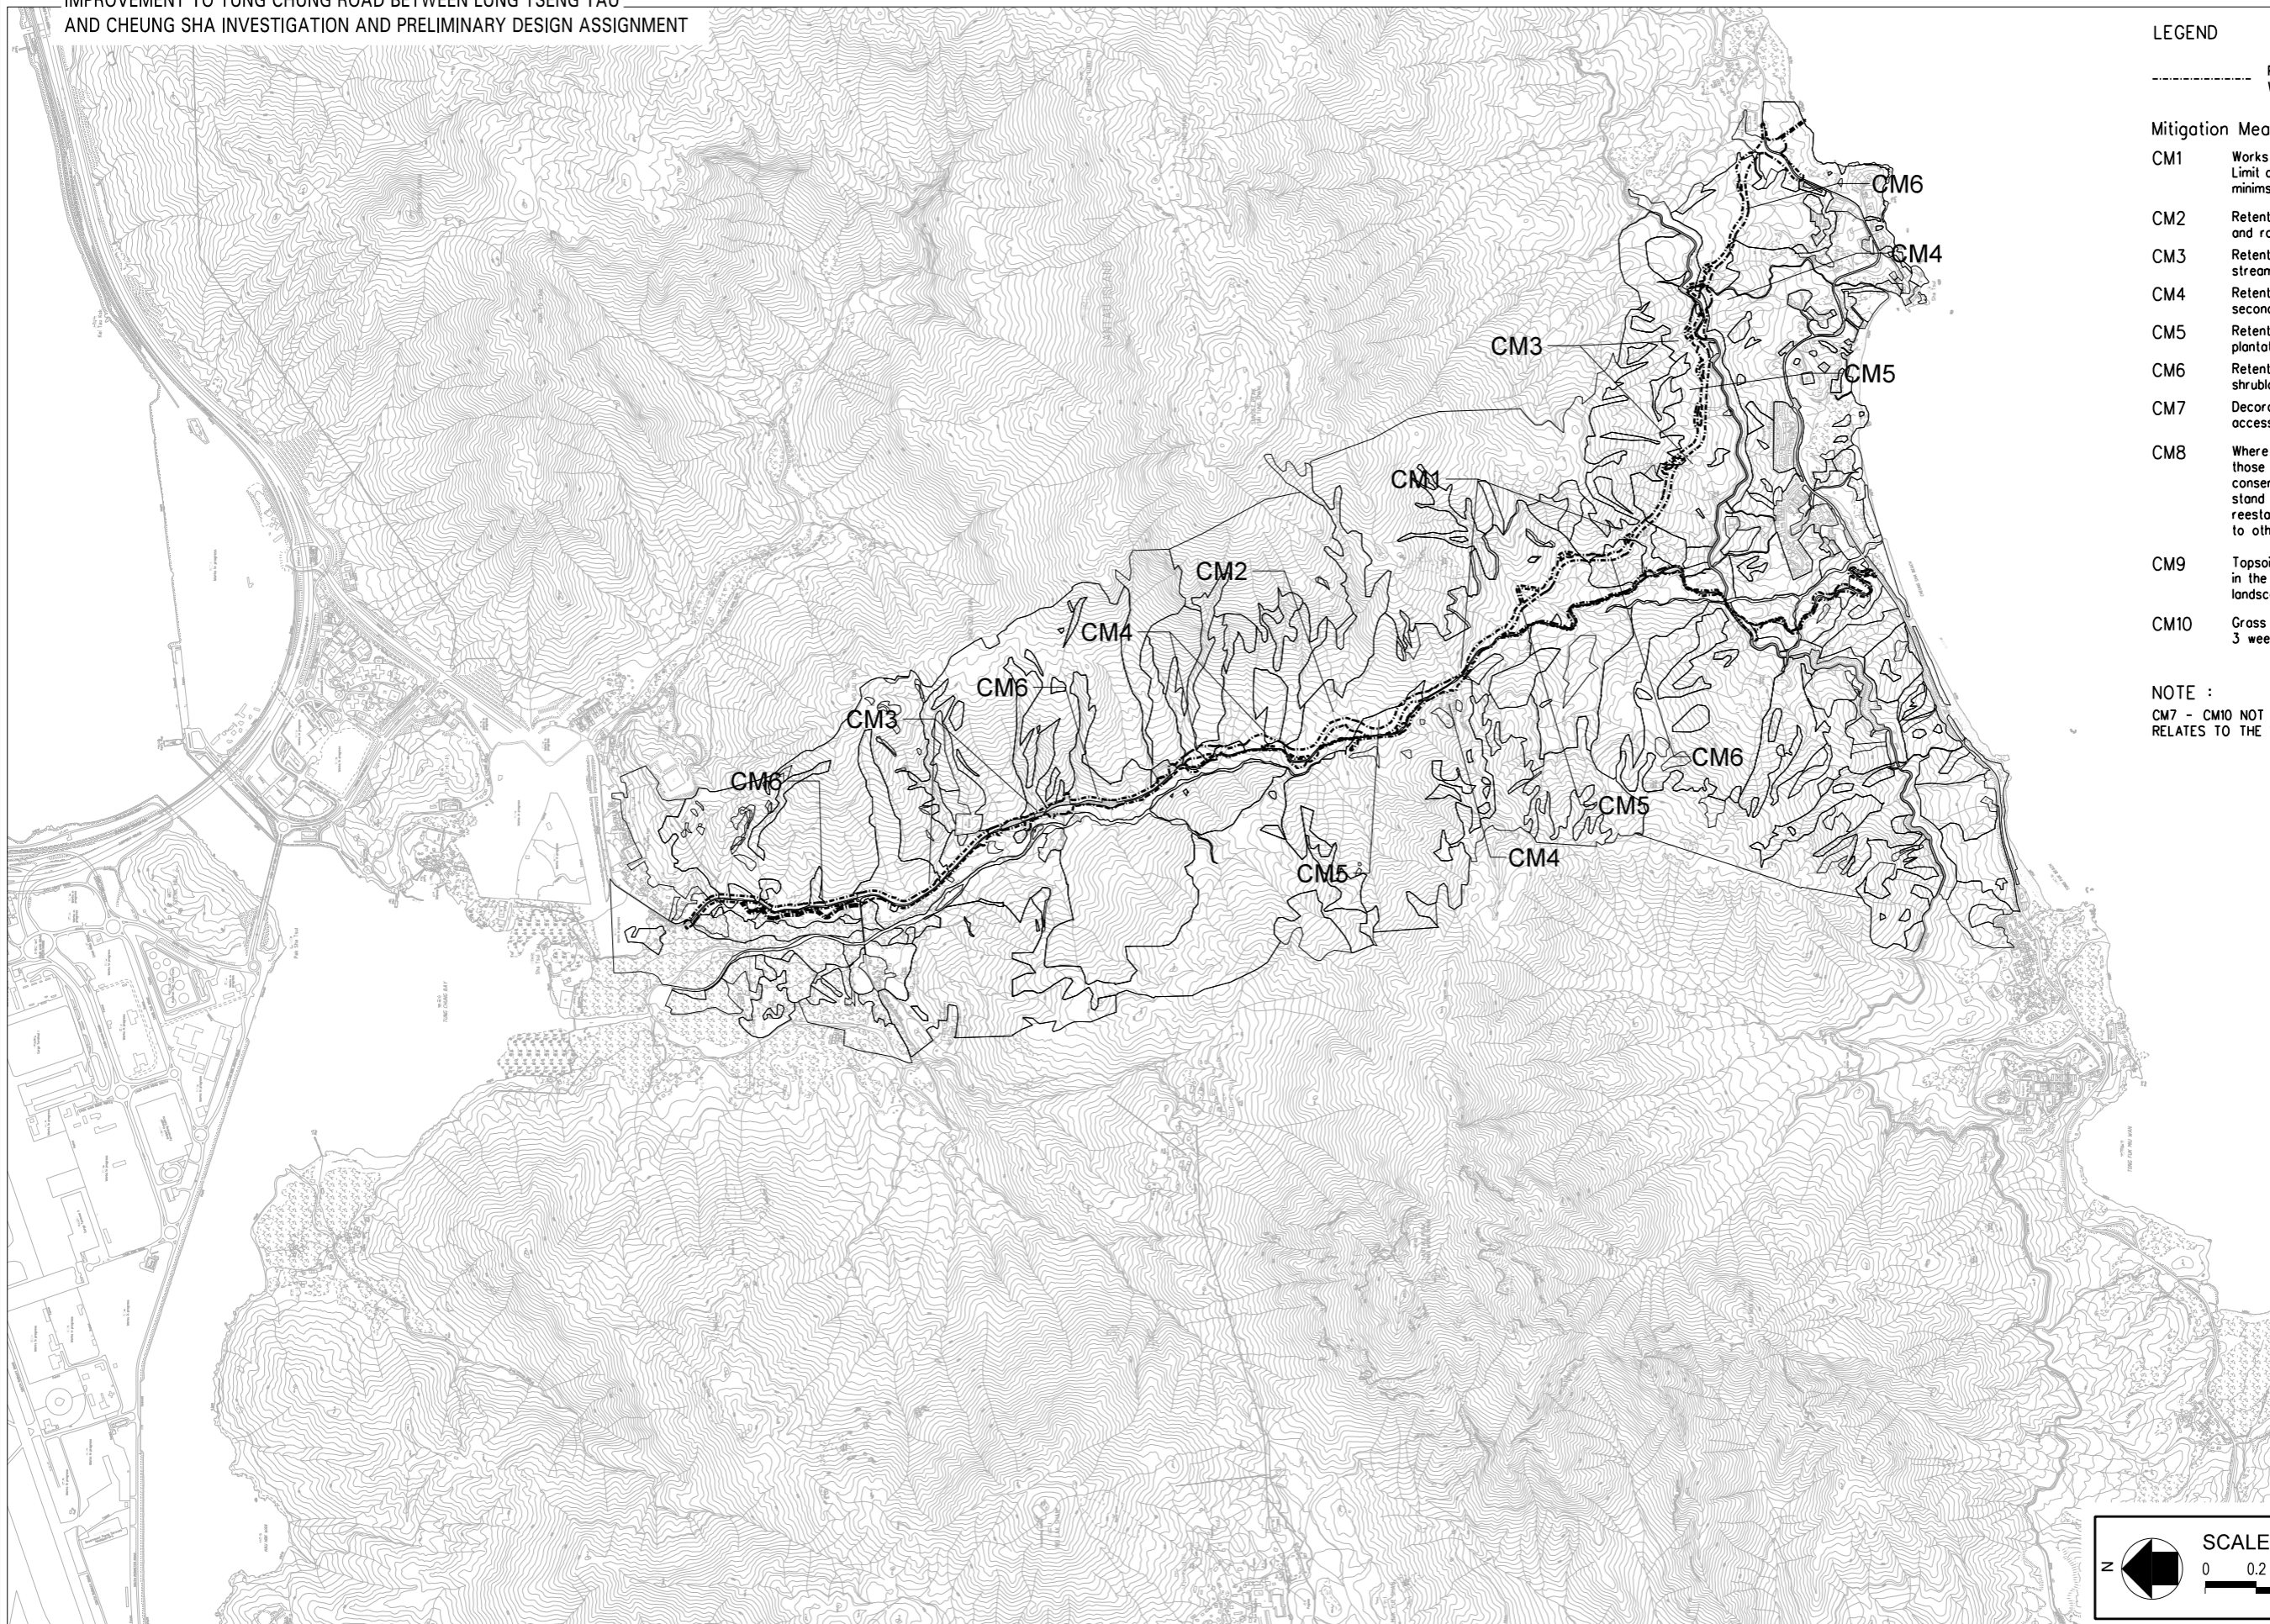

LANDSCAPE MITIGATION MEASURES PLAN - CONSTRUCTION PHASE