MTR Corporation Limited

MTR Lai Chi Kok Station Pedestrian Subway and Entrance Works Monthly Environmental Monitoring & Audit Report

16 November 2007 – 15 December 2007

8/F, Chaiwan Industrial Centre Building 20 Lee Chung Street, Chaiwan, Hong Kong Tel: 2889 0569 Fax: 2856 2010

P. 1

MTR Lai Chi Kok Station

Cheung Lai Street Pedestnan Subway & Entrance Works

Environmental Permit No. EP - 253/ 2006

MTR Lai Chi Kok Station Cheung Lai Street Pedestrian Subway & Entrance Works

Submission Document Title: Environmental Permit Conditions

- Monthly EM&A Report

Environmental Permit No.: EP-253/ 2006

Independent Environmental Checker Ref: EP2532006-LCK-IEC-006

According to Permit Condition 1.9 of the above Environmental Permit, the titled document(s) certified by the Environmental Team Leader has / have been checked and verified by the undersigned..

Verified by:

Dr. Glenn H Frommer

Head of Sustainability Development

of MTR Corporation

2 4 DEC 2007

Date

APPROVAL SHEET

Prepared and Cer	rtified by:	: ET Leader (Environmental Pionee	rs & Solution	s Limited)
------------------	-------------	---------------	----------------------	---------------	------------

Signature: Miss Patricia Chung

Date: 2 1 2 2001

(ET Leader)

* ET – Environmental Team

TABLE OF CONTENTS

EX	ECUTIVE SUMMARY	4
1	INTRODUCTION	5
2	PROJECT INFORMATION	5
	2.1 Construction Program	5
	2.2 Construction Activities in the past month	6
	2.3 Construction Activities for the coming month	6
3	NOISE MONITORING	7
	3.1 Monitoring Methodology	7
	3.2 Equipment used and calibration details	7
	3.3 Monitoring Station	7
	3.4 Monitoring Results	8
	3.5 Monitoring Schedule for Next Reporting Period	9
4	ACTION TAKEN IN EVENT OF EXCEEDENCE	10
5	CONSTRUCTION WASTE DISPOSAL	10
6	COMPLAINT LOG	10
7	STATUS OF PERMITS AND LICENSES OBTAINED	11
8	SITE INSPECTION AND AUDITS	11
9	CONCLUSION	12
AP	PENDIX 1 – REFERENCE FIGURES	13
۸DI	DENIDLY 2 ENVIRONMENTAL MONITORING DATA/CHARTS	16

EXECUTIVE SUMMARY

This is the fourth Monthly Environmental Monitoring and Audit (EM&A) Report for "MTRC Lai Chi Kok Station Pedestrian Subway and Entrance Works". The Report concludes the impact monitoring and audit works for the construction works undertaken during the period of 16 November 2007 to 15 December 2007. The major construction activities in this reporting month include site preparation works, ventilation duct construction, excavation works, utility and drainage works and driving sheet pile works.

Impact monitoring for noise was conducted in this reporting period. There was no exceedance of action and limit levels recorded at the agreed sensitive receivers. No formal prosecution and complaint were recorded in this reporting period. The contractor's performance on environmental matters was considered satisfactory.

As the construction site is mainly located in Cheung Lai Street, a section of Cheung Sha Wan Road and a section of Lai Chi Kok Road, the noise levels were significantly affected by the busy running traffic.

1 INTRODUCTION

This is the 4th Monthly Environmental Monitoring and Audit (EM&A) Report for "MTRC Lai Chi Kok Station Pedestrian Subway and Entrance Works" (Environmental Permit No. EP-253/2006). The Report concludes the impact monitoring and audit works for the construction works undertaken during the period of 16 November 2007 to 15 December 2007.

2 PROJECT INFORMATION

2.1 Construction Program

The civil construction of the subway would take approximately 30 months. Prior to construction of the subway, it would need to take about 6 months for temporary diversion of an existing 1.8m diameter sewer located along Lai Chi Kok Road.

The construction of the subway will be carried out in three sections simultaneously by cut and cover method. Vertical open cut will be undertaken along each section. Temporary walls and internal bracings will be installed to provide support for excavation. In order to maintain traffic flow, road decking will be provided as soon as practical. This will also act as a screen to minimize the nuisance to the public and pedestrian. All excavation and construction of the subway and its ancillary underground structure will be carried out underneath the deck thereby minimizing environmental impacts. At-grade access points will be provided for transportation of material/spoil and workers' access. Once the construction of the subway structure is completed, the work areas will be backfilled and the road surface will be reinstated.

Site location plan is shown in Appendix 1. The construction programme is shown below.

Activities			Mor	nth		
	1-5	6-10	11-15	16-20	21-25	26-30
1800 Ø Sewer Diversion of Lai Chi						
Kok Sewer						
Construction of Subway						
Construction of smoke extraction air shaft (above ground)						
Construction of fresh air intake shaft (above ground)						
Construction of subway entrance D1 (above ground)						
Construction of subway entrance D2 (above ground)						
Construction of subway entrance D3 inside Liberte						
Construction of subway entrance D4 inside The Pacifica						

2.2 Construction Activities in the past month

Major construction activities carried out by the contractor during this reporting period include:

- Site preparation works
- Ventilation duct construction
- General excavation works
- Utility and drainage works at Cheung Lai Street
- Driving sheet piles at Cheung Lai Street and below West Kowloon Corridor

2.3 Construction Activities for the coming month

Major construction activities by the contractor anticipated for the coming month include:

- Site preparation works
- Ventilation duct construction
- Driving sheet piles at Cheung Lai Street and below West Kowloon Corridor
- General excavation works
- Utility and drainage works at Cheung Lai Street
- 1800mm dia. sewer diversion below West Kowloon Corridor

3 NOISE MONITORING

3.1 Monitoring Methodology

In accordance with the EM&A Manual, the construction noise level is measured in terms of A-weighted equivalent continuous sound pressure level (L_{Aeq}). During normal construction working hours (0700-1900 Monday to Saturday), monitoring of $L_{Aeq, 30min}$ noise levels (as six consecutive $L_{Aeq, 5min}$ readings) was carried out once every week.

3.2 Equipment used and calibration details

Impact noise monitoring was conducted using SVAN sound analysis equipment – SVAN 949, which complied with the International Electrotechnical Commission Publications 651:1979 (Type 1) and 804:1 985 (Type 1) Specifications as referred to in the Technical Memorandum to the Noise Control Ordinance. The equipment were calibrated and verified by certified laboratory or manufacturer every two years to ensure they perform to the same level of accuracy as stated in the manufacturer's specification. Before and after each measurement, the reading of sound level meter was checked with the acoustic calibrator and the measurements were accepted as valid if the calibration levels before and after the noise measurement agreed to within 1.0 dB. Free field and weatherproof microphone was extended 1m from the exterior of the sensitive receivers building façade and with an unobstructed field of view of the proposed construction site. Measurements were recorded to the nearest 0.1 dB.

3.3 Monitoring Station

In accordance with the EM&A Manual, monitoring stations were established at 2 locations, which are summarized in Table 3.1 and depicted in Appendix 1.

Table 3.1 – Noise Monitoring Stations

Sensitive Receiver No.	Location
R1	Podium, Block 7, Liberte
R2	Podium, Tower 1, The Pacifica

3.4 Monitoring Results

The results are presented in the Table 3.2. Relevant details of the noise monitoring results and graphic plots are presented in Appendix 2. The results, ranged between 65.2 dB(A) and 73.9 dB(A), were within the limit levels and therefore, no exceedance was found.

Location	Parameter	Date	Time	L _{Aeq} *	Limit	Exceedance
R1	Leq30min	20-Nov-07	16:16	72.2 dB(A)	75 dB(A)	N
R1	Leq30min	26-Nov-07	16:45	72.2 dB(A)	75 dB(A)	N
R1	Leq30min	3-Dec-07	16:33	72.9 dB(A)	75 dB(A)	N
R1	Leq30min	10-Dec-07	10:39	69.4 dB(A)	75 dB(A)	N
R2	Leq30min	20-Nov-07	17:06	65.2 dB(A)	75 dB(A)	N
R2	Leq30min	26-Nov-07	17:40	73.9 dB(A)	75 dB(A)	N
R2	Leq30min	3-Dec-07	17:18	66.0 dB(A)	75 dB(A)	N
R2	Leq30min	10-Dec-07	11:23	73.4 dB(A)	75 dB(A)	N

^{*} Corrected to baseline background level

Action and Limit levels and the associated Event/ Action Plan in event of exceedence are summarized in Table 3.2 and 3.3, respectively.

Table 3.2 - Action and Limit Levels for Construction Noise at Sensitive Receivers R1 and R2

Time Period	Action	Limit
Daytime	When one	75 dB(A)
0700 – 1900 hrs on normal weekdays	documented	
0700 – 2300hrs on holidays; and 1900 – 2300 hrs on all	complaint is	Subject to the control of
other days	received	Noise Control Ordinance
2300 – 0700 hrs of next day		Subject to the control of
		Noise Control Ordinance

Table 3.3 - Event/Action plan for construction noise

E4				Action						
Event		ET Leader	IEC			RE		Contractor		
Action Level	 1. 2. 3. 4. 5. 	Notify IEC, RE and the Contractor. Carry out investigation. Report the results of investigation to IEC,RE and the Contractor. Discuss with the RE and the Contractor and formulate remedial measures. Increase monitoring frequency to check mitigation measures.	 2. 3. 	Review with analysed results submitted by ET. Review the proposed remedial measures by the Contractor and advise RE accordingly. Supervise the implement of remedial measures.	 2. 3. 4. 	Confirm receipt of notification of exceedance in writing. Notify the Contractor. Require the Contractor to propose remedial measures for the analysed noise problem. Ensure remedial measures are	2.	Submit noise mitigation proposals to RE / ET. Implement noise mitigation proposals.		
Limit Level	1. 2.	Identify the source. Notify IEC, RE, EPD and the	1.	Discuss amongst RE, ET Leader and the Contractor on	1.	properly implemented. Confirm receipt of notification of exceedance in	1.	Take immediate action to avoid further		
	3. 4.	Contractor. Repeat measurement to confirm findings. Increase monitoring	2.	the potential remedial actions. Review the Contractor's	2.	writing. Notify the Contractor. Require the	2.	exceedance. Submit proposals for remedial actions to RE and		
	5.	frequency. Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented.	3.	remedial actions whenever necessary to assure their effectiveness and advise RE accordingly. Supervise the	4.	Contractor to propose remedial measures for the analysed noise problem. Ensure remedial measures are	 3. 4. 	IEC within 3 working days of notification. Implement the agreed proposals. Resubmit proposals if		
	6.	Inform IEC, RE, and EPD the causes & actions taken for the exceedances.		implementation of remedial measures.	5.	properly implemented. If exceedance continues,	5.	problem still not under control. Stop the relevant activity of works		
	7.	Assess effectiveness of the Contractor's remedial actions and keep IEC, EPD and RE informed of the results.				consider what activity of the work is responsible and instruct the Contractor to stop		as determined by the RE until the exceedance is abated.		
	8.	If exceedance stops, cease additional monitoring				that activity of work until the exceedance is abated.				

3.5 Monitoring Schedule for Next Reporting Period

Noise monitoring in the next reporting period is scheduled for 18^{th} , 24^{th} and 31^{st} December 2007, as well as 7^{th} and 14^{th} January 2008.

Site inspection schedule for the next reporting period is designated on 24th December 2007 and 7th January 2008.

4 ACTION TAKEN IN EVENT OF EXCEEDENCE

There were no exceedance recorded during this reporting period, therefore no actions were taken.

5 CONSTRUCTION WASTE DISPOSAL

Dumping locations for disposal of C&D wastes from the construction site were appointed and allocated by EPD/CEDD. The contractor has implemented the delivery trip ticket system for recording the waste disposal to the public fill and landfill areas. Excavated materials are reused as back-fill material to balance cut and fill and hence reduce the generation of materials. Table 5.1 is a summary of updated figures of the construction wastes disposal provided by the Contractor. The relevant disposal records are kept in Contractor's site office for inspection.

Table 5.1 Summary of Construction Waste Disposal

	Amount	Amount of Construction Waste disposed					
	Inert Waste	Non-inert Waste	Chemical Waste				
	(to Public Fill) (tonnes)	(to Landfill) (tonnes)	(trip)				
16 August 07 to 15 September 07	963.75	34.8					
16 September 07 to 15 October 07	1220.02	0					
16 October 07 to 15 November 07	186.89	0					
16 November 07 to 15 December 07	136.7	0	13				
Total	2507.36	34.8	13				

6 COMPLAINT LOG

Table 6.1 is the environmental complaint summary record.

Table 6.1 Summary of Formal Complaints received

	Air	Noise	Water	Others
16 August 07 to 15 September 07	0	0	0	0
16 September 07 to 15 October 07	0	0	0	0
16 October 07 to 15 November 07	0	0	0	0
16 November 07 to 15 December 07	0	0	0	0
Total	0	0	0	0

7 STATUS OF PERMITS AND LICENSES OBTAINED

Table 7.1 is the updated status of environmental related permits/ license obtained for the construction activities

Table 7.1 Status of Permits and Licenses Obtained

Description	License / Permit No.#	Date of Issue	Date of Expiry	Remarks
Environmental Permit	EP-253/2006	11 Aug 2006		
Registration of C&D Waste Producer	7005542	1 Jun 2007		
Chemical Waste Producer	5214-264-K2869-08	08-May 2007		
Construction Noise Permit	PP-R-W0012-07	6 Aug 2007	14 Feb 2008	
Effluent Discharge License	EP760/264/0124051	24 July 2007	31 July 2012	

8 SITE INSPECTION AND AUDITS

During the reporting period, regular bi-weekly joint site inspections led by senior staffs from MTRC, Residential Engineer, Contractor and the ET were carried out. The Contractor's performance on the environmental matters was assessed and concerned items were raised for rectification. Inspection findings from the reporting period are summarized as follows:

Item	Observations/ Description	Status
1	The Contractor was reminded to have regular check on site to ensure the compliance of relevant environmental regulations, permits and licenses.	Ongoing
2	The Contractor was reminded to ensure all required construction noise mitigation measures to be followed properly.	Ongoing
3	The Contractor was reminded to keep the site works area and site office tidy as good housekeeping.	Ongoing
4	The Contractor should designate general waste storage area and provide sufficient collection bins at site area W2 and Cheung Lai Street	Action required
5	The Contractor was reminded to implement proper noise mitigation measures, such as noise mat and noise barriers, for noise emitting works such as sheet pile works	Ongoing
6	The Contractor should erect proper hoardings for Cheung Lai Street site area.	Ongoing

Item	Observations/ Description	Status
7	Pledge lock should be provided for the chemical storage cabinet installed. The Contractor was reminded to prevent the possible oil leak from the stationery plants by providing drip pans	Action required

9 CONCLUSION

In this reporting month, construction activities for this project "MTRC Lai Chi Kok Station Pedestrian Subway and Entrance Works" included site preparation works, ventilation duct construction, general excavation works, utility and drainage works and driving sheet pile works. Regular meetings and site audits, led by the seniors and attended by RE, ET, IEC and the Contractor, were held for discussing site environmental related issues at monthly and weekly basis respectively. Concerned site environmental items have been in general followed up properly by the Contractor for rectification. The environmental pollution control measures provided by the Contractor were considered satisfactory. Noise levels recorded during the monitoring period were within limits. No formal prosecution and complaint were recorded during the reporting month. The ET will continue to implement the environmental monitoring & audit programme in accordance with the EM&A Manual and Environmental Permit requirements.

 $MTRC-Lai\ Chi\ Kok\ Station$ Cheung Lai Street Pedestrian Subway and Entrance Works $4^{th}\ Monthly\ EM\&A\ Report$

APPENDIX 1 – REFERENCE FIGURES

Figure 1 Project Construction Area

Figure 2 Noise Monitoring Stations

Figure 1 Project Construction Area


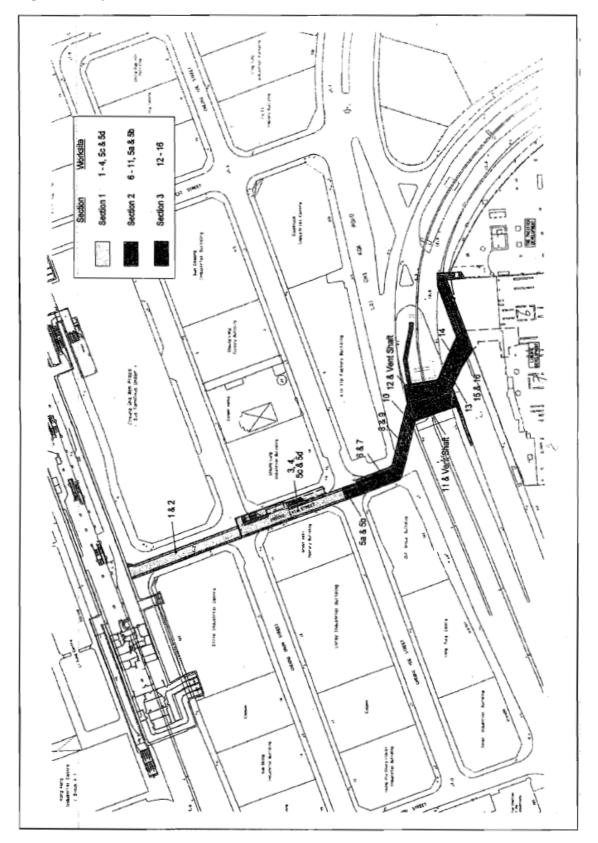


Figure 2 Noise Monitoring Stations R1 and R2



	MTRC -	Lai C	hi Kok	Station
Cheung Lai Street Pedestriar	Subway	and E	Intrance	Works
	4 th Mo	onthly	EM&A	Report

APPENDIX 2 – ENVIRONMENTAL MONITORING DATA/ CHARTS

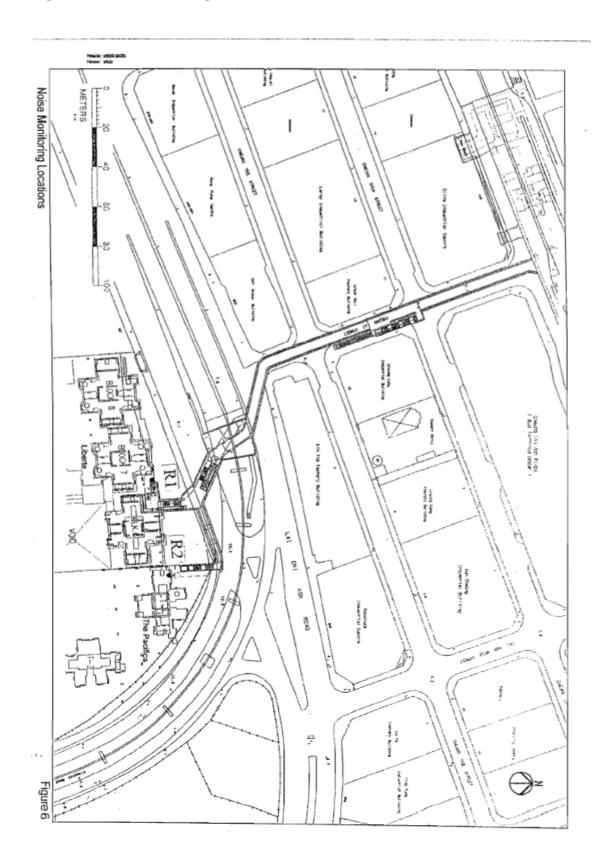