


**-CCECC & CRWJ Joint Venture**

**Contract No. HY/2003/19**

**Improvement to Tung Chung Road  
between Lung Tseng Tau and Cheung Sha**

**Monthly EM&A Report  
(Version 1.0)**

July 2008

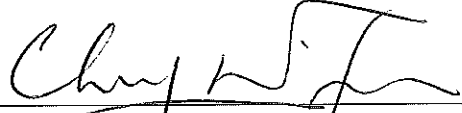Certified By	 (Environmental Team Leader)
--------------	---

REMARKS:

The information supplied and contained within this report is, to the best of our knowledge, correct at the time of printing.

CINOTECH accepts no responsibility for changes made to this report by third parties.

**CINOTECH CONSULTANTS LTD**

Room 1710, Technology Park,  
18 On Lai Street,  
Shatin, NT, Hong Kong  
Tel: (852) 2151 2083  
Fax: (852) 3107 1388  
Email: [info@cinotech.com.hk](mailto:info@cinotech.com.hk)

## TABLE OF CONTENTS

<b>EXECUTIVE SUMMARY .....</b>	<b>1</b>
<b>1. INTRODUCTION .....</b>	<b>4</b>
Background .....	4
Project Organizations .....	5
Construction Programme.....	5
Summary of EM&A Requirements .....	5
<b>2. AIR QUALITY .....</b>	<b>7</b>
Monitoring Requirements .....	7
Monitoring Locations .....	7
Monitoring Equipment .....	7
Monitoring Parameters, Frequency and Duration .....	8
Monitoring Methodology and QA/QC Procedure .....	8
Results and Observations .....	9
<b>3. NOISE .....</b>	<b>10</b>
Monitoring Requirements .....	10
Monitoring Locations .....	10
Monitoring Equipment .....	11
Monitoring Parameters, Frequency and Duration .....	11
Monitoring Methodology and QA/QC Procedures .....	11
Maintenance and Calibration.....	12
Results and Observations .....	12
<b>4. WATER QUALITY .....</b>	<b>13</b>
Monitoring Requirements .....	13
Monitoring Equipment .....	13
Monitoring Parameters, Frequency and Duration .....	13
Monitoring Locations .....	14
Monitoring Methodology, Calibration Details and QA/QC Procedures .....	14
Maintenance and Calibration.....	15
Results and Observations .....	15
<b>5. ENVIRONMENTAL AUDIT.....</b>	<b>17</b>
Site Audits .....	17
Review of Environmental Monitoring Procedures.....	17
Status of Environmental Licensing and Permitting.....	17
Status of Waste Management.....	18
Implementation Status of Environmental Mitigation Measures.....	19
Non-compliance Recorded during Site Inspections .....	29
Summary of Mitigation Measures Implemented .....	29
Summary of Exceedances of the Environmental Quality Performance Limit .....	30
Implementation Status of Event Action Plans.....	31
Summary of Complaint, Warning, Notification of any Summons and Successful Prosecution.....	31
<b>6. FUTURE KEY ISSUES .....</b>	<b>32</b>
Key Issues for the Coming Month.....	32

Monitoring Schedule for the Next Month .....	32
Construction Program for the Project (Construction Program for the Next Month).....	32
<b>7. CONCLUSIONS AND RECOMMENDATIONS .....</b>	<b>34</b>
Conclusions .....	34
Recommendations .....	34

**LIST OF TABLES**

Table I	Summary Table for Non-compliance Recorded in the Reporting Month
Table II	Summary Table for Key Information in the Reporting Month
Table 2.1	Locations for Air Quality Monitoring
Table 2.2	Air Quality Monitoring Equipment
Table 2.3	Impact Dust Monitoring Parameters, Frequency and Duration
Table 3.1	Noise Monitoring Stations
Table 3.2	Noise Monitoring Equipment
Table 3.3	Noise Monitoring Parameters, Frequency and Duration
Table 4.1	Water Quality Monitoring Equipment
Table 4.2	Frequency and Parameters of Water Quality Monitoring
Table 4.3	Water Quality Monitoring Locations
Table 4.4	Summary of Water Quality Exceedances in the reporting month
Table 5.1	Summary of Environmental Licensing and Permit Status
Table 5.2	Observations and Recommendations of Site Inspections

**LIST OF FIGURES**

Figure 1	Layout Plan of the Project
Figure 2	Organization Chart
Figure 3	Monitoring Locations (7 sheets total)

**LIST OF APPENDICES**

A	Action and Limit Levels for Air Quality, Noise and Water Quality
B	Copies of Calibration Certificates
C	Environmental Monitoring Schedules
D	24-hour TSP Monitoring Results, Graphical Presentations and Wind Data
E	Noise Monitoring Results and Graphical Presentations
F	Water Quality Monitoring Results and Graphical Presentations
G	Quality Control Reports for Laboratory Analysis
H	Summary of Exceedances
I	Site Audit Summary
J	Environmental Mitigation Implementation Schedule (EMIS)
K	Event Action Plans
L	Complaint Logs
M	Summary of Warnings/Direction issued by the EPD and Prosecution
N	Construction Programme
O	Waste Generated Quantity

## ABBREVIATION AND ACRONYM

AL Levels	Action and Limit Levels
E / ER	Engineer/Engineer's Representative
EIA	Environmental Impact Assessment
EM&A	Environmental Monitoring and Audit
EMIS	Environmental Mitigation Implementation Schedule
EP	Environmental Permit
EPD	Environmental Protection Department
ET	Environmental Team
HVS	High Volume Sampler
HyD	Highways Department
IEC	Independent Environmental Checker
NOE	Notification of Exceedance
QA/QC	Quality Assurance / Quality Control
RE	Resident Engineer
RH	Relative Humidity
SLM	Sound Level Meter
TSP	Total Suspended Particulates
WMP	Waste Management Plan



## EXECUTIVE SUMMARY

### *Introduction*

1. This is the 45<sup>th</sup> monthly Environmental Monitoring and Audit (EM&A) Report prepared by Cinotech Consultants Limited for the project “Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha” (the Project). This report documents the findings of EM&A Works conducted in July 2008.
2. The construction activities undertaken in the reporting month included:
  - Construction of rock fall fencing;
  - Construction of drainage and water pipe;
  - Drainage and slope works;
  - Construction of debris trap;
  - Installation of street furniture; and
  - Raising of watermain valve pit.

### *Environmental Monitoring Works*

3. Environmental monitoring for the Project was performed regularly as stipulated in the Updated EM&A Manual (Revision C) and the results were checked and reviewed. Site audits were conducted once per week. The implementation of the environmental mitigation measures, Event Action Plans and environmental complaint handling procedures were also checked.
4. Summary of exceedance of noise, air and water quality monitoring for the reporting month is tabulated in Table I.

**Table I Summary Table for Exceedance Recorded in the Reporting Month**

Parameter	Number of Exceedances due to the Project		Action Taken	Results of Action Taken
	Action Level	Limit Level		
Air Quality	0	0	N.A.	N.A.
Noise	0	0	N.A.	N.A.
Water Quality	0	0	N.A.	N.A.

### *Air Quality*

5. 24-hr TSP monitoring at 3 monitoring stations, AM1, AM2 and AM4, were conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded for 24-hr TSP monitoring in the reporting month.

### *Construction Noise*

6. Noise monitoring at 7 designated monitoring stations, namely NM1, NM2, NM3, NM4, NM5, NM6 and NM8, were conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded in the reporting month.

*Water Quality*

7. Water quality monitoring was conducted as scheduled, at designated monitoring stations (Streams 15, 18, 21, 23, 26, 27, 40, Cheung Sha Stream, Tung Chung Stream and Tung Chung Bay) which are under the influence of the works in the reporting month. Streams 19, 25, 32 and 35 were observed to be dry throughout the reporting month. Therefore, no water monitoring was conducted at these streams. As the water depth of Tung Chung Bay was less than 3m, only the mid-depth level was monitored.
8. Exceedances of turbidity (NTU) and suspended solids (SS) were recorded in the month. No direct evidence demonstrated that the exceedances were caused by the Project.

*Environmental Licensing and Permitting*

9. License/Permits granted to the Project include Environmental Permit (License No.: EP-170/2003/C), Registration of Chemical Waste Producer (License: WPN5214-950-C1213-01), Water Discharge License (License No.: EP890/W7/XP089, EP890/W7/XP090 and EP890/W2/XG013) and Construction Noise Permit (License No.: GW-RS0419-08, GW-RW0122-08 and GW-RS0209-08).

*Key Information in the Reporting Month*

10. Summary of key information in the reporting month is tabulated in Table II.

**Table II Summary Table for Key Information in the Reporting Month**

Event	Event Details		Action Taken	Status	Remark
	Number	Nature			
Complaint received	0	---	N.A.	N.A.	---
Changes to the assumptions and key construction / operation activities recorded	0	---	N.A.	N.A.	---
Notifications of any summons received	0	---	N.A.	N.A.	---
Notifications of any successful prosecution received	0	---	N.A.	N.A.	---

***Complaints and Prosecutions***

11. No environmental complaint was received in the reporting month.
12. No warning and summon or notification of successful prosecution was received in the reporting month.

***Future Key Issues***

13. Key issues to be considered in the coming month include:
  - Runoff from exposed slope;
  - Wastewater and runoff discharge from site;
  - Regular removal of silt, mud and sand along u-channels and sedimentation tanks;
  - Review and implementation of temporary drainage system for the surface runoff;
  - Proper storage of construction materials near streams;
  - Noise from operation of the equipment, especially for rock-breaking activities and machinery on-site;
  - Dust generation from stockpiles of dusty materials, exposed retain wall, excavation works and rock breaking activities;
  - Storage of chemicals/fuel and chemical waste/waste oil on site;
  - Watering for rock breaking activity, soil nailing and on haul road; and
  - Accumulation of general and construction waste near stream and on site.

## 1. INTRODUCTION

### Background

- 1.1 The Project “Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha” involves the widening and realignment of Tung Chung Road between Lung Tseng Tau in North Lantau and Cheung Sha in South Lantau. The layout plan of the Project is shown in Figure 1.
- 1.2 The scope of the Project includes:
- a) widening and realignment of a 3.6 km section of Tung Chung Road (TCR) between Lung Tseng Tau and Pak Kung Au from a single-lane road for two-way traffic to a single two-lane road for two-way traffic with a footpath having a minimum width of 1.6 m, and construction of a 2.6 km long single two-lane road between Pak Kung Au and Cheung Sha, including elevated highway structures of a total length of 750 m, with a footpath of a minimum width of 1.6 m;
  - b) provision of 21 passing bays/bus-bays along the road and a roundabout at Cheung Sha; and
  - c) associated works including road rehabilitation, drainage, utility, environmental mitigation measures, landscaping, slope stabilization, traffic aids, road safety enhancement measures, lighting, traffic control and surveillance system, and electrical and mechanical (E&M) works.
- 1.3 The Environmental Impact Assessment (EIA) Report for the Project was approved on 4 July 2002 under the Environmental Impact Assessment Ordinance (EIAO). An Environmental Permit (EP- 170/2003) for the works was also granted on 27 June 2003. Two varied Environmental Permits (EP) (EP-170/2003/B and EP-170/2003/C) were issued in June 2006 and July 2007 respectively. Environmental Monitoring and Audit (EM&A) Manual for the Project was also included as part of the EIA reports in the register. An updated EM&A Manual (Revision C) has been issued on 28 April 2006.
- 1.4 Highways Department awarded the construction of the Project to CCECC & CRWJ Joint Venture (being a joint venture of China Civil Engineering Construction Corporation & China Railway Wujia Group Corporation) (hereinafter called “the Contractor”) in June 2004. The construction works commenced on 4 November 2004 and are scheduled to be completed by September 2007.
- 1.5 Cinotech Consultants Limited (Cinotech) was commissioned by the Contractor to undertake the Environmental Team (ET) Services for the Project since 1 September 2006. All environmental and audit works were conducted by Cinotech and the laboratory testing works were conducted by a HOKLAS laboratory, Wellab Limited. This is the 45<sup>th</sup> monthly EM&A report summarizing the EM&A works for the Project in July 2008.

---

## Project Organizations

- 1.6 Different parties with different levels of involvement in the project organization include:
- Project Proponent – Major Works Project Management Office (MWPMO) of Highways Department (HyD)
  - Engineer (E) / Engineer's Representative (ER) – Mott Connell Limited
  - Contractor – CCECC & CRWJ Joint Venture
  - Environmental Team (ET) – Cinotech Consultants Limited
  - Independent Environmental Checker (IEC) – ENSR Asia (HK) Limited
- 1.7 The responsibilities of respective parties are detailed in Section 1.5 of the Updated EM&A Manual (Revision C, issued on 28 April 2006) of the Project. The project organization chart is presented in Figure 2.

## Construction Programme

- 1.8 The construction activities undertaken in the reporting month were:

### *Northern Section*

- Drainage works at Zone A;
- Debris trap construction and slope works at Zone B;
- Rock fall fencing construction and slope works at Zone C;
- Installation of street furniture at Zone D;
- Slope and drainage works at Zone E; and
- Rock fall fencing, water pipe construction and drainage works at Zone F.

### *Southern Section*

- Raising of watermain valve pit at Zone 1 and Zone 2;
- Installation of street furniture at Zone 3;
- Drainage construction and slope works at Zone 4 and Zone 5; and
- Drainage works at Zone 6.

## Summary of EM&A Requirements

- 1.9 The EM&A programme requires construction phase monitoring for air quality and construction noise, water quality and environmental site audit. The EM&A requirements for each parameter are described in the following sections, including:
- All monitoring parameters;
  - Action and Limit levels for all environmental parameters;

- Event Action Plans;
  - Environmental mitigation measures, as recommended in the project EIA report;  
and
  - Environmental requirements in contract documents.
- 1.10 The advice on the implementation status of environmental protection and pollution control/mitigation measures is summarized in Section 5 of this report.
- 1.11 This report presents the environmental monitoring results, observations, locations, equipment, period, methodology and QA/QC procedures of the required monitoring parameters, namely air quality, noise levels, water quality and audit works for the Project in the reporting month.

## 2. AIR QUALITY

### Monitoring Requirements

- 2.1 Monitoring of 1-hour and 24-hour TSP was conducted to monitor the air quality. Appendix A shows the established Action/Limit Levels for the environmental monitoring works.

### Monitoring Locations

- 2.2 In accordance with the updated EM&A Manual, 24-hour TSP monitoring shall only be conducted at the monitoring location when there are Project related construction activities being undertaken within a radius of 500 m from the monitoring location.
- 2.3 Five designated monitoring stations, AM1 to AM5 were selected for impact dust monitoring for the Project. Table 2.1 describes the air quality monitoring locations and Figure 3 shows their locations.

**Table 2.1 Locations for Air Quality Monitoring**

Monitoring Station	Description	Location
AM1	YMCA of Hong Kong Christian College	Rooftop
AM2	D 68 Leyburn Villas	House
AM3 <sup>(1)</sup>	Butterfly Crest	House
AM4	No. 31 South Lantau Road	House
AM5 <sup>(2)</sup>	YWCA	To be confirmed

Remarks:

- <sup>(1)</sup> Monitoring at AM3 will be conducted when the Project related construction activities are being undertaken within a radius of 500 m from the monitoring location.
- <sup>(2)</sup> Monitoring at AM5, YWCA, will be resumed when YWCA re-open.

### Monitoring Equipment

- 2.4 Table 2.2 summarizes the equipment used for the air quality monitoring. Copies of calibration certificates are attached in Appendix B.

**Table 2.2 Air Quality Monitoring Equipment**

Equipment	Model and Make	Quantity
Calibrator	GMW25; S/N: 1536	1
HVS Sampler	Graseby GMW Model GS2310 High Volume TSP Sampler and associated equipment and shelter	3

## Monitoring Parameters, Frequency and Duration

- 2.5 Table 2.3 summarizes the monitoring parameters and frequencies of impact dust monitoring for the whole construction period. The air quality monitoring schedule for the reporting period is shown in Appendix C.

**Table 2.3 Impact Dust Monitoring Parameters, Frequency and Duration**

Parameters	Frequency
1-hr TSP <sup>(a)</sup>	Three times / 6 days
24-hr TSP	Once / 6 days

Note:

(a) 1-hour TSP monitoring will be carried out in case that an exceedance of 24-hour TSP level is identified to be due to the Project.

## Monitoring Methodology and QA/QC Procedure

### Instrumentation

- 2.6 Graseby GMW Model GS2310 TSP High Volume Sampler (HVS) was employed for 1-hour & 24-hour TSP monitoring. The sampler was composed of a motor, a filter holder, a flow controller and a sampling inlet and its performance specification complied with that required by USEPA Standard Title 40, Code of Federation Regulations Chapter 1 (Part 50). Moreover, the HVS also met all the requirements in Section 3.2 of the Updated EM&A Manual.

### Operating/Analytical Procedures

- 2.7 Operating/analytical procedures for the operation of HVS were as follows:
- A horizontal platform was provided with appropriate support to secure the samplers against gusty wind.
  - No two samplers were placed less than 2 meters apart.
  - The distance between the sampler and an obstacle, such as buildings, was at least twice the height that the obstacle protrudes above the sampler.
  - A minimum of 2 meters of separation from walls, parapets and penthouses was required for rooftop samples.
  - A minimum of 2 meters separation from any supporting structure, measured horizontally was required.
  - No furnaces or incineration flues were nearby.
  - Airflow around the sampler was unrestricted.
  - The sampler was more than 20 meters from the drip line.
  - Any wire fence and gate, to protect the sampler, should not cause any obstruction during monitoring.
- 2.8 Prior to the commencement of the dust sampling, the flow rate of the high volume sampler was properly set (between 1.1 m<sup>3</sup>/min. and 1.4 m<sup>3</sup>/min.) in accordance with the manufacturer's instruction to within the range recommended in USEPA Standard Title 40, CFR Part 50. For TSP sampling, fiberglass filters (G810) were used.



- 2.9 The power supply was checked to ensure the sampler worked properly. On sampling, the sampler was operated for 5 minutes to establish thermal equilibrium before placing any filter media at the designated air monitoring station.
- 2.10 The filter holding frame was then removed by loosening the four nuts and a weighted and conditioned filter was carefully centered with the stamped number upwards, on a supporting screen.
- 2.11 The filter was aligned on the screen so that the gasket formed an airtight seal on the outer edges of the filter. Then the filter holding frame was tightened to the filter holder with swing bolts. The applied pressure should be sufficient to avoid air leakage at the edges.
- 2.12 The shelter lid was closed and secured with the aluminum strip. The timer was then programmed. Information was recorded on the record sheet, which included the starting time, the weather condition and the filter number (the initial weight of the filter paper can be found out by using the filter number). After sampling, the filter was removed and sent to the laboratory for weighing. The elapsed time was also recorded.
- 2.13 Before weighing, all filters were equilibrated in a conditioning environment for 24 hours. The conditioning environment temperature should be between 25°C and 30°C and not vary by more than  $\pm 3^\circ\text{C}$ ; the relative humidity (RH) should be  $< 50\%$  and not vary by more than  $\pm 5\%$ . A convenient working RH is 40%.

#### Maintenance/Calibration

- 2.14 The following maintenance/calibration was required for the HVS:
- The high volume motors and their accessories were properly maintained. Appropriate maintenance such as routine motor brushes replacement and electrical wiring checking were made to ensure that the equipment and necessary power supply are in good working condition.
  - High volume samplers were calibrated at bi-monthly intervals using GMW-25 Calibration Kit throughout all stages of the air quality monitoring.

#### Wind Data

- 2.15 Wind data was required to be taken from the Hong Kong Observatory Weather Stations including HK International Airport and Cheung Chau.

#### **Results and Observations**

- 2.16 24-hr TSP monitoring at 3 monitoring stations, AM1, AM2 and AM4, were conducted as scheduled in the reporting month.
- 2.17 The monitoring data, graphical presentations and wind data for the reporting month are summarized in Appendix D. No Action/Limit Level exceedance was recorded for 24-hr TSP monitoring in the reporting month.

### 3. NOISE

#### Monitoring Requirements

- 3.1 Monitoring and audit of construction noise levels is required to be conducted, in accordance with the Updated EM&A Manual, to ensure that any unacceptable noise impacts could be readily detected and timely and appropriate action be undertaken to rectify the situation.
- 3.2 The construction noise levels shall be measured in terms of the A-weighted equivalent continuous sound pressure level (Leq). Leq (30min) shall be used as the monitoring parameter for the time period between 0700-1900 hours on normal weekdays. For all other time periods, Leq (5min) shall be employed for comparison with the Noise Control Ordinance (NCO) criteria. As supplementary information for data auditing, statistical results such as L<sub>10</sub> and L<sub>90</sub> shall also be obtained for reference.

#### Monitoring Locations

- 3.3 In accordance with the Updated EM&A Manual, noise monitoring shall only be conducted at the monitoring location when there are Project related construction activities being undertaken within a radius of 300m from the monitoring location.
- 3.4 Eight designated noise monitoring stations, NM1 to NM8 were selected for noise impact monitoring. Appendix A shows the established Action and Limit Levels for the environmental monitoring works. Table 3.1 describes the noise monitoring locations and Figure 3 shows their locations.

**Table 3.1 Noise Monitoring Stations**

Stations	Description	Location
NM1	No. 28 Lung Tseng Tau	Ground Floor
NM2	YMCA of Hong Kong Christian College	Rooftop
NM3	No. 37 Shek Lau Po	Ground Floor
NM4	No. 1 Shek Mun Kap	Ground Floor
NM5	Tung Chung Au Country Parks Management Centre	Ground Floor
NM6	D75 Leyburn Villa	Ground Floor
NM7 <sup>(1)</sup>	House in Butterfly Crest House 22	Rooftop
NM8	No. 31 South Lantau Road	Ground Floor

Remarks:

- <sup>(1)</sup> Monitoring at NM7 will be conducted when the Project related construction activities are being undertaken within a radius of 300 m from the monitoring location.

### Monitoring Equipment

- 3.5 Table 3.2 summarizes the noise monitoring equipment model being used. Copies of calibration certificates are attached in Appendix B.

**Table 3.2 Noise Monitoring Equipment**

Equipment	Model and Make	Quantity
Integrating Sound Level Meter	B&K Model 2238	5
Calibrator	B&K 4231	3
Wind Speed Anemometer	RS232 Integral Vane Digital Anemometer	1

### Monitoring Parameters, Frequency and Duration

- 3.6 Table 3.3 summarizes the monitoring parameters, frequency and total duration of monitoring. The noise monitoring schedule is attached in Appendix C.

**Table 3.3 Noise Monitoring Parameters, Frequency and Duration**

Station	Parameter	Period <sup>1</sup>	Frequency	Measurement
NM1	L <sub>10</sub> (30 min.)dB(A) L <sub>90</sub> (30 min.)dB(A) L <sub>eq</sub> (30 min.)dB(A)	(a) 0700-1900 hrs. on weekdays (b) 1900-2300 hrs. on weekdays (c) 0700-2300 hrs. on holidays (d) 2300-0700 hrs on any days	Once every 6 working days	Façade <sup>(1)</sup>
NM2				Façade <sup>(1)</sup>
NM3				Façade <sup>(1)</sup>
NM4				Façade <sup>(1)</sup>
NM5				Façade <sup>(1)</sup>
NM6				Façade <sup>(1)</sup>
NM7				Façade <sup>(1)</sup>
NM8				Façade <sup>(1)</sup>

Remarks:

<sup>(1)</sup>Noise measurements were taken at 1m from the exterior of the building facade.

(b), (c) and (d) will only be conducted if construction works are undertaken during these periods.

### Monitoring Methodology and QA/QC Procedures

- The Sound Level Meter was generally set on a tripod at a height of 1.2 m above the ground, depending to the actual monitoring condition.
- For free field measurement (if any), the meter was positioned away from any nearby reflective surfaces. All records for free field noise levels were adjusted with a correction of +3 dB(A).
- The battery condition was checked to ensure the correct functioning of the meter.
- Parameters such as frequency weighting, the time weighting and the measurement time were set as follows:

- frequency weighting : A
- time weighting : Fast
- time measurement : 30 minutes / 5 minutes
- Prior to and after each noise measurement, the meter was calibrated using a Calibrator for 94.0 dB at 1000 Hz. If the difference in the calibration level before and after measurement was more than 1.0 dB, the measurement would be considered invalid and repeat of noise measurement would be required after re-calibration or repair of the equipment.
- The wind speed was frequently checked with the portable wind meter.
- At the end of the monitoring period, the  $L_{eq}$ ,  $L_{90}$  and  $L_{10}$  were recorded. In addition, site conditions and noise sources were recorded on a standard record sheet.
- Noise measurement was paused during periods of high intrusive noise if possible and observation was recorded when intrusive noise was not avoided.
- Noise monitoring was cancelled in the presence of fog, rain, and wind with a steady speed exceeding 5 m/s, or wind with gusts exceeding 10 m/s.

### **Maintenance and Calibration**

- 3.7 The microphone head of the sound level meter and calibrator was cleaned with soft cloth regularly. The meters were sent to the supplier to check and calibrate on a yearly interval.

### **Results and Observations**

- 3.8 Noise monitoring was conducted as scheduled at the seven designated stations NM1, NM2, NM3, NM4, NM5, NM6 and NM8, in this reporting month. Noise monitoring results and graphical presentations are shown in Appendix E.
- 3.9 No Action/Limit Level exceedance was recorded in the reporting month.

## 4. WATER QUALITY

### Monitoring Requirements

- 4.1 Water quality monitoring was conducted in accordance with the Updated EM&A Manual. Appendix A shows the established Action Limit Levels for the environmental monitoring works.

### Monitoring Equipment

- 4.2 Table 4.1 summarizes the equipment used in the impact water quality monitoring program. All the monitoring equipment complied with the specifications stipulated in the EM&A Manual. Copies of the calibration certificates of the equipment are attached in Appendix B.

**Table 4.1 Water Quality Monitoring Equipment**

Equipment	Model and Make	Qty.
Multi-parameter Water Quality System	YSI 6820	2

### Monitoring Parameters, Frequency and Duration

- 4.3 Table 4.2 summarizes the monitoring parameters, monitoring period and frequencies of water quality monitoring. The water quality monitoring schedule is attached in Appendix C.
- 4.4 In-situ measurements were taken at designated monitoring stations which are under the influence of the works at least three times per week during the course of the construction period. In addition, water samples for suspended solid analysis have been collected at the designated stations and delivered to Wellab for further laboratory analysis.

**Table 4.2 Frequency and Parameters of Water Quality Monitoring**

Parameters	Frequency	No. of Depth
DO Saturation (%), DO (mg/L), Turbidity (NTU), SS (mg/L), Temperature (°C), & pH	3 times per week	Sub-surface

## Monitoring Locations

- 4.5 The water quality monitoring locations are shown in Figure 3 and their details are provided in Table 4.3.

**Table 4.3 Water Quality Monitoring Locations**

Monitoring Station (Stream No.)	Type	Easting	Northing
Tung Chung Stream	Reference	811853	813289
	Impact	811601	813716
Cheung Sha Stream	Reference	812525	811980
	Impact	812447	811165
Stream 15	Reference	811853	813289
	Impact	811781	813298
Stream 18	Reference	811889	813107
	Impact	811836	813138
Stream 19	Reference	811920	812927
	Impact	811858	812987
Stream 21	Reference	811994	812695
	Impact	811873	812723
Stream 23	Reference1	811980	812589
	Reference 2	812079	812386
	Impact	811894	812658
Stream 25	Reference	812353	812052
	Impact	812324	812017
Stream 26	Reference	812525	811980
	Impact	812456	811895
Stream 27	Reference	812658	811770
	Impact	812604	811747
Stream 32	Reference	812980	811410
	Impact	812988	811327
Stream 35	Reference	813231	811275
	Impact	813218	811218
Stream 40	Reference	813686	811311
	Impact	813690	811211
Tung Chung Bay	Reference	810679	816038
	Impact	810787	815706

## Monitoring Methodology, Calibration Details and QA/QC Procedures

### Instrumentation

- 4.6 A multi-parameter meter (Model YSI 6820 CE-C-M-Y) was used to measure DO, turbidity, salinity, pH and temperature.

### Operating/Analytical Procedures

- 4.7 At each monitoring location, two consecutive measurements were taken for water samples being collected on site. The probes were retrieved out of the water after the first measurement and then re-deployed for the second measurement. Where the difference in the value between the first and second readings of each set was more than 25% of the value of the first reading, the reading was discarded and further readings were taken.
- 4.8 For SS, measurement and grab samples of surface water were collected. Water samples of about 1,000 ml were collected and stored in polyethylene bottles. Following collection, water samples were stored in high density polythene bottles with preservative appropriately added, packed in ice and cooled to 4°C (without being frozen), delivered to the HOKLAS accredited laboratory, Wellab Limited and analyzed.

### **Maintenance and Calibration**

- 4.9 Before each round of monitoring, a zero check in distilled water was performed with the turbidity probe of YSI 6820. The probe was then calibrated with a solution of known NTU.

### **Results and Observations**

- 4.10 Water quality monitoring was conducted as scheduled, at designated monitoring stations (Streams 15, 18, 21, 23, 26, 27, 40, Cheung Sha Stream, Tung Chung Stream and Tung Chung Bay), which are under the influence of the works, in the reporting month. As Streams 19, 25, 32 and 35 were observed dry, no water monitoring at these locations was conducted in the reporting month.
- 4.11 During monitoring, the weather conditions were mainly sunny and cloudy. The monitoring data and graphical presentations of the monitoring results are shown in Appendix F and the Quality Control reports for the laboratory analysis are provided in Appendix G.
- 4.12 Exceedances of turbidity (NTU) and suspended solids (SS) were recorded in water samples in the reporting month. The exceedance reports are attached in Appendix H. The summary of exceedances for each water quality parameters are provided in Table 4.4.

**Table 4.4 Summary of Water Quality Exceedances in the reporting month**

Station No.	DO		pH	Turbidity		SS	
	Action	Limit	Limit	Action	Limit	Action	Limit
15_I	0	0	0	0	0	0	0
18_I	1	0	0	0	0	0	0
19_I*	0	0	0	0	0	0	0
21_I	1	0	0	0	0	0	0
23_I	0	0	0	0	0	0	0
25-I*	0	0	0	0	0	0	0
26_I	0	0	0	0	0	0	0
27_I	0	0	0	0	0	13	0
32_I*	0	0	0	0	0	0	0
35_I*	0	0	0	0	0	0	0
40_I	0	0	0	0	0	0	0
CSS_I	0	0	0	2	2	0	0
TCB_I	0	0	0	0	0	0	0
TCS_I	0	0	0	0	0	0	0

Remarks: \* indicates the stream was not sampled in the reporting month.

- 4.13 As shown in the exceedance reports attached in Appendix H, all exceedances for water quality parameters recorded in the reporting month were not due to the Project based on the following observations:
- ✧ No construction activity was observed in the vicinity of the sampling locations.
  - ✧ No pollution discharge from construction activity was observed.
  - ✧ Measured value at the reference station was higher than at the impact monitoring stations.
- 4.14 According to the ET's investigation, no direct evidence demonstrated the exceedances of Action/Limit level for water monitoring parameters were caused by the Project.



## 5. ENVIRONMENTAL AUDIT

### Site Audits

- 5.1 Site audits were carried out on a weekly basis to monitor the timely implementation of proper environmental management practices and mitigation measures in the Project site.
- 5.2 ET site audits were conducted on 3<sup>rd</sup>, 9<sup>th</sup>, 17<sup>th</sup>, 24<sup>th</sup> and 31<sup>st</sup> July 2008 in the reporting month. IEC site inspections were conducted on 9<sup>th</sup> and 24<sup>th</sup> July 2008. The summaries of site audits are attached in Appendix I.

### Review of Environmental Monitoring Procedures

- 5.3 The monitoring works conducted by the monitoring team were inspected regularly. The following observations were recorded for the monitoring works:

#### *Air Quality Monitoring*

- The monitoring team recorded all observations around the monitoring stations within and outside of the construction site.
- The monitoring team recorded the temperature, air pressure and weather conditions on the monitoring day.

#### *Noise Monitoring*

- The monitoring team recorded all observations around the monitoring stations, which might affect the monitoring result.
- Major noise sources were identified and recorded. Other intrusive noise attributing to the result was trimmed off by pausing the monitoring temporarily.

#### *Water Quality Monitoring*

- The monitoring team recorded all observations around the monitoring stations, which might affect the monitoring result.
- The monitoring team recorded the weather and river conditions on the monitoring day.

### Status of Environmental Licensing and Permitting

- 5.4 All permits/licenses obtained for the Project are summarized in Table 5.1.

**Table 5.1 Summary of Environmental Licensing and Permit Status**

Permit No.	Valid Period		Details	Status
	From	To		
<b>Environmental Permit (EP)</b>				
EP-170/2003/C	31/7/07	N/A	Construction of (a) Widening and realignment of an approximate 3.6 kilometre long section of Tung Chung Road between Lung Tseng Tau and Pak Kung Au from a single-lane road for two-way traffic to a single two-lane road with footpath; (b) Construction of an approximate 2.6 kilometre long single two-lane road between Pak Kung Au and Cheung Sha with footpath and elevated highway structures; and (c) Provision of passing bays/bus lay-bys along Tung Chung Road.	Valid
<b>Registration of Chemical Waste Producer</b>				
WPN5214 - 950-C1213-01	---	N/A	Chemical waste types: spent Indication oil, surplus paint, spent diesel, spent thinner, mixing residue containing pesticides, spent mineral oil	Valid
<b>Water Discharge License</b>				
EP890/W7/XP089	---	N/A	Discharge from Sewage Treatment System (Northern Section)	Valid
EP890/W7/XP090	---	N/A	Industrial discharge (Northern Section)	Valid
EP890/W2/XG013	---	N/A	Industrial discharge (Southern Section)	Valid
<b>Construction Noise Permit (CNP)</b>				
GW-RS0419-08	25/06/08	24/12/08	Construction Noise Permit for Tung Chung Road between Lung Tseng Tau and Cheung Sha	Valid
GW-RS0811-07	09/12/07	08/06/08	Construction Noise Permit for the use of powered mechanical equipment for carrying out construction work at Tung Chung Road between Lung Tseng Tan and Cheung Sha, Lantau Island, Hong Kong	Expired
GW-RW0122-08	20/03/08	19/09/08	Construction Noise Permit for Cheung Tung Road near Sunny Bay Station, Lantau Island, H.K.	Valid
GW-RS0209-08	10/04/08	09/10/08	Construction Noise Permit for Construction Site for Roadworks between Pak Kung Au and Cheung Sha Sheung Tsuen	Valid

**Status of Waste Management**

- 5.5 The waste management of the Project has to follow the requirements and procedures stated in the Waste Management Plan which was prepared by the Contractor.
- 5.6 The solid waste generated from the Project was mainly general refuse that was collected by a licensed collector on an as need basis.
- 5.7 The monthly summary of waste flow table and the timber summary for July 2008 are provided in Appendix O.

### Implementation Status of Environmental Mitigation Measures

5.8 During site inspections in the reporting month, no non-conformance was identified. The observations and recommendations are summarized in Table 5.2.

**Table 5.2 Observations and Recommendations of Site Inspections**

Parameters	Date	Observations and Recommendations	Follow-up
<i>Water Quality</i>	03/07/08	Standing silty water was observed accumulate at <b>Shan Shek Wan</b> . The Contractor was reminded to provide sedimentation tank for de-silting before discharging out.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	03/07/08	Sediment was observed accumulate at the sedimentation tanks at <b>Shan Shek Wan</b> to cause the tank cannot function properly. The Contractor was reminded to clear the silt and sediment.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	03/07/08	The Contractor was reminded of the followings: - Properly cover the exposed surface near <b>Stream 25</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	03/07/08	The Contractor was reminded of the followings: - Hydroseed/cover the exposed slope with tarpaulin at underneath <b>STR10-13</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	03/07/08	The Contractor was reminded of the followings: - Hydroseed/cover the exposed surface at <b>STR14</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	03/07/08	The Contractor was reminded of the followings: - Properly cover the exposed slope at underneath <b>STR16</b> .	Rectification/improvement was observed during the follow-up audit session.
	03/07/08	The Contractor was reminded of the followings: - Clear sediment near the catchwater.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	03/07/08	The Contractor was reminded of the followings: - Properly cover the exposed surface at <b>SD10-19</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.

Parameters	Date	Observations and Recommendations	Follow-up
	03/07/08	The Contractor was reminded of the followings: - Properly cover the exposed slope at <b>RW7</b> .	Rectification/improvement was observed during the follow-up audit session.
	09/07/08	Standing silty water was observed accumulate at <b>Shan Shek Wan</b> . The Contractor was reminded to provide sedimentation tank for de-silting before discharging out.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	09/07/08	Sediment was observed accumulate at the sedimentation tanks at <b>Shan Shek Wan and Shek Mun Kap</b> to cause the tank cannot function properly. The Contractor was reminded to clear the silt and sediment.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	09/07/08	Oil spillage was observed at the entrance of <b>STR7</b> . The Contractor was reminded to clear them to prevent from discharging to the drainage system.	Rectification/improvement was observed during the follow-up audit session.
	09/07/08	The Contractor was reminded of the followings: - Properly cover the exposed surface near <b>Stream 25</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	09/07/08	The Contractor was reminded of the followings: - Hydroseed/cover the exposed slope with tarpaulin at underneath <b>STR10-13</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	09/07/08	The Contractor was reminded of the followings: - Hydroseed/cover the exposed surface at <b>STR14</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	09/07/08	The Contractor was reminded of the followings: - Clear C&D waste and sediment near the catchwater.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	09/07/08	The Contractor was reminded of the followings: - Clear the stagnant water in the discarded sedimentation tanks near the catchwater.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	09/07/08	The Contractor was reminded of the followings: The Contractor was reminded of the followings:	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding

Parameters	Date	Observations and Recommendations	Follow-up
		- Properly cover the exposed surface at <b>SD10-19.</b>	item.
	09/07/08	The Contractor was reminded of the followings: - Properly cover the stockpile at between <b>STR7-8.</b>	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	09/07/08	The Contractor was reminded of the followings: - Keep clear the sediment at the culvert at <b>RW6.</b>	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	09/07/08	The Contractor was reminded of the followings: - Drying out the standing water at <b>STR8</b> and <b>STR13.</b>	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	09/07/08	The Contractor was reminded of the followings: - Re-arrange the stream diversion at <b>Stream 19.</b>	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	09/07/08	The Contractor was reminded of the followings: - Clear sediment and debris at the paved road at <b>CH4300 (Existing TCR).</b>	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	17/07/08	Standing silty water was observed accumulate at <b>Shan Shek Wan.</b> The Contractor was reminded to provide sedimentation tank for de-silting before discharging out.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	17/07/08	Sediment was observed accumulate at the sedimentation tanks at <b>Shan Shek Wan and Shek Mun Kap.</b> The Contractor was reminded to clear the silt and sediment to maintain the tanks can function properly.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	17/07/08	Silt water was observed discharging to the public road at underneath <b>STR7.</b> The Contractor was reminded to provide sedimentation tank for de-silting before discharging out.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	17/07/08	The Contractor was reminded of the followings: - Drying out the standing water at <b>STR8.</b>	Rectification/improvement was observed during the follow-up audit session.
	17/07/08	The Contractor was reminded of the followings:	This item was not rectified during the follow-up audit

Parameters	Date	Observations and Recommendations	Follow-up
		- Hydroseed/cover the exposed slope with tarpaulin at underneath <b>STR10-13</b> .	session. Follow-up action was needed for the outstanding item.
	17/07/08	The Contractor was reminded of the followings: - Hydroseed/cover the exposed surface at <b>STR14</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	17/07/08	The Contractor was reminded of the followings: - Clear the stagnant water in the discarded sedimentation tanks near the catchwater.	Rectification/improvement was observed during the follow-up audit session.
	17/07/08	The Contractor was reminded of the followings: - Clear C&D waste and sediment near catchwater.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	17/07/08	The Contractor was reminded of the followings: - Properly cover the exposed surface at <b>SD10-19</b> when it is not in works.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	17/07/08	The Contractor was reminded of the followings: - Clear sediment and debris at the paved road at <b>CH4300 (Existing TCR)</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	17/07/08	The Contractor was reminded of the followings: - Re-arrange the stream diversion at <b>Stream 19</b> . (in-progress)	Rectification/improvement was observed during the follow-up audit session.
	17/07/08	The Contractor was reminded of the followings: - Keep clear the sediment at the culvert at <b>RW6</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	24/07/08	Sediment was observed accumulate at the sedimentation tanks at <b>Shan Shek Wan</b> . The Contractor was reminded to clear the silt and sediment to maintain the tank can function properly.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	24/07/08	Silt water was observed discharging to the U-Channel at underneath <b>STR7</b> while the upstream water has been diverted. The Contractor was reminded to provide mitigation measures to prevent any silty water from discharging out.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	24/07/08	The Contractor was reminded of the	Rectification/improvement

Parameters	Date	Observations and Recommendations	Follow-up
		<p>followings:</p> <ul style="list-style-type: none"> <li>- Provide mitigation measures to prevent silty water running in the underground channel at <b>STR7</b>.</li> </ul>	was observed during the follow-up audit session.
	24/07/08	<p>The Contractor was reminded of the followings:</p> <ul style="list-style-type: none"> <li>- Hydroseed/cover the exposed slope with tarpaulin at underneath <b>STR10-13</b>.</li> </ul>	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	24/07/08	<p>The Contractor was reminded of the followings:</p> <ul style="list-style-type: none"> <li>- Hydroseed/cover the exposed surface at <b>STR14</b>.</li> </ul>	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	24/07/08	<p>The Contractor was reminded of the followings:</p> <ul style="list-style-type: none"> <li>- Clear sediment and C&amp;D waste near catchwater.</li> </ul>	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	24/07/08	<p>The Contractor was reminded of the followings:</p> <ul style="list-style-type: none"> <li>- Properly cover the catchment channel near the construction works.</li> </ul>	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	24/07/08	<p>The Contractor was reminded of the followings:</p> <ul style="list-style-type: none"> <li>- Properly cover the exposed surface at <b>SD10-19</b> when it is not in works.</li> </ul>	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	24/07/08	<p>The Contractor was reminded of the followings:</p> <ul style="list-style-type: none"> <li>- Clear sediment and debris at the paved road at <b>CH4300 (Existing TCR)</b>.</li> </ul>	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	24/07/08	<p>The Contractor was reminded of the followings:</p> <ul style="list-style-type: none"> <li>- Keep clear the sediment at the culvert at <b>RW6</b>.</li> </ul>	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	24/07/08	<p>The Contractor was reminded of the followings:</p> <ul style="list-style-type: none"> <li>- Clear standing water at <b>CH4300 (Existing TCR)</b>.</li> </ul>	Rectification/improvement was observed during the follow-up audit session.
	31/07/08	<p>Sediment was observed accumulate at the sedimentation tanks at <b>Shan Shek Wan</b>. The Contractor was reminded to clear the silt and sediment to maintain the tank can function properly.</p>	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.

Parameters	Date	Observations and Recommendations	Follow-up
	31/07/08	Silt water was observed discharging to the U-Channel at underneath <b>STR7</b> while the upstream water has been diverted. The Contractor was reminded to provide mitigation measures to prevent any silty water from discharging out. (in-progress)	Rectification/improvement was observed during the follow-up audit session.
	31/07/08	The Contractor was reminded of the followings: - Clear the silt at drainage channel at the entrance of <b>STR7</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	31/07/08	The Contractor was reminded of the followings: - Hydroseed/cover the exposed slope with tarpaulin at underneath <b>STR10-13</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	31/07/08	The Contractor was reminded of the followings: - Hydroseed/cover the exposed surface at <b>STR14</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	31/07/08	The Contractor was reminded of the followings: - Clear sediment and debris near catchment.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	31/07/08	The Contractor was reminded of the followings: - Properly cover the catchment channel near the construction works.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	31/07/08	The Contractor was reminded of the followings: - Properly cover the exposed surface at <b>SD10-19</b> when it is not in works.	Rectification/improvement was observed during the follow-up audit session.
	31/07/08	The Contractor was reminded of the followings: - Clear sediment and debris at the paved road along existing TCR.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	31/07/08	The Contractor was reminded of the followings: - Keep clear the sediment at the culvert at <b>RW6</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
<b>Air Quality</b>	03/07/08	The Contractor was reminded of the followings:	This item was not rectified during the follow-up audit



Parameters	Date	Observations and Recommendations	Follow-up
		- Properly cover the stockpile at between <b>STR7-8</b> .	session. Follow-up action was needed for the outstanding item.
	03/07/08	The Contractor was reminded of the followings: - Hydroseed/cover the exposed slope with tarpaulin at underneath <b>STR10-13</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	03/07/08	The Contractor was reminded of the followings: - Hydroseed/cover the exposed surface at <b>STR14</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	03/07/08	The Contractor was reminded of the followings: - Properly cover the stockpile at opposite to <b>RW11. (OTCR)</b>	Rectification/improvement was observed during the follow-up audit session.
	03/07/08	The Contractor was reminded of the followings: - Hydroseed the exposed surface at <b>STR6</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	09/07/08	The Contractor was reminded of the followings: - Hydroseed/cover the exposed slope with tarpaulin at underneath <b>STR10-13</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	09/07/08	The Contractor was reminded of the followings: - Hydroseed/cover the exposed surface at <b>STR14</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	09/07/08	The Contractor was reminded of the followings: - Properly cover the stockpile at between <b>STR7-8</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	09/07/08	The Contractor was reminded of the followings: - Hydroseed the exposed surface at <b>STR6</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	17/07/08	The Contractor was reminded of the followings: - Properly cover the stockpile at between <b>STR7-8</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.

Parameters	Date	Observations and Recommendations	Follow-up
	17/07/08	The Contractor was reminded of the followings: - Hydroseed/cover the exposed slope with tarpaulin at underneath <b>STR10-13</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	17/07/08	The Contractor was reminded of the followings: - Hydroseed/cover the exposed surface at <b>STR14</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	17/07/08	The Contractor was reminded of the followings: - Properly cover the stockpile at <b>old TCR</b> when it is not in works.	Rectification/improvement was observed during the follow-up audit session.
	17/07/08	The Contractor was reminded of the followings: - Hydroseed the exposed surface at <b>STR6</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	24/07/08	The Contractor was reminded of the followings: - Properly cover the stockpile at between <b>STR7-8</b> when it is not in work.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	24/07/08	The Contractor was reminded of the followings: - Hydroseed/cover the exposed slope with tarpaulin at underneath <b>STR10-13</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	24/07/08	The Contractor was reminded of the followings: - Hydroseed/cover the exposed surface at <b>STR14</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	24/07/08	The Contractor was reminded of the followings: - Hydroseed the exposed surface at <b>STR6</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	31/07/08	The Contractor was reminded of the followings: - Properly cover the stockpile at <b>STR7-8</b> when it is not in works.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	31/07/08	The Contractor was reminded of the followings:	This item was not rectified during the follow-up audit

Parameters	Date	Observations and Recommendations	Follow-up
		- Clear the stockpile of cement at <b>STR9A</b> .	session. Follow-up action was needed for the outstanding item.
	31/07/08	The Contractor was reminded of the followings: - Hydroseed/cover the exposed slope with tarpaulin at underneath <b>STR10-13</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	31/07/08	The Contractor was reminded of the followings: - Hydroseed/cover the exposed surface at <b>STR14</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	31/07/08	The Contractor was reminded of the followings: - Hydroseed the exposed surface at <b>STR6</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
<i>Waste/Chemical Management</i>	03/07/08	The Contractor was reminded of the followings: - Clear discarded plants at underneath between <b>STR13-14</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	03/07/08	The Contractor was reminded of the followings: - Clear the cement bags (abandon) at underneath <b>RW38</b> .	Rectification/improvement was observed during the follow-up audit session.
	03/07/08	The Contractor was reminded of the followings: - Keep clear the discarded plants and sediment at the culvert at <b>RW6</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	09/07/08	The Contractor was reminded of the followings: - Clear C&D waste and sediment near the catchwater.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	09/07/08	The Contractor was reminded of the followings: - Clear discarded plants at underneath between <b>STR13-14</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	17/07/08	The Contractor was reminded of the followings: - Provide drip tray for the oil container at the entrance of <b>STR7</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.

Parameters	Date	Observations and Recommendations	Follow-up
	17/07/08	The Contractor was reminded of the followings: - Clear discarded plants at underneath between <b>STR13-14</b> .	Rectification/improvement was observed during the follow-up audit session.
	17/07/08	The Contractor was reminded of the followings: - Clear C&D waste and sediment near catchwater.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	24/07/08	The Contractor was reminded of the followings: - Clear discarded cement bags (abandon) at <b>STR7</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	24/07/08	The Contractor was reminded of the followings: - Clear sediment and C&D waste near catchwater.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	24/07/08	The Contractor was reminded of the followings: - Provide drip tray for the oil container at the entrance of <b>STR7</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	31/07/08	The Contractor was reminded of the followings: - Provide drip tray for the oil container at the entrance of <b>STR7</b> .	Rectification/improvement was observed during the follow-up audit session.
	31/07/08	The Contractor was reminded of the followings: - Clear the C&D waste and sediment at the U-channel at underneath <b>STR7</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	31/07/08	The Contractor was reminded of the followings: - Clear discarded cement bags (abandon) at <b>STR7</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	31/07/08	The Contractor was reminded of the followings: - Clear C&D waste near <b>Stream 19(downstream), Stream 28, Stream 29 and Stream 34</b> .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	31/07/08	The Contractor was reminded of the followings: - Clear discarded plants at underneath	This item was not rectified during the follow-up audit session. Follow-up action was

Parameters	Date	Observations and Recommendations	Follow-up
		<b>STR13.</b>	needed for the outstanding item.
	31/07/08	The Contractor was reminded of the followings: - Clear discarded cement bags (abandon) at <b>RW28.</b>	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
<b>General</b>	03/07/08	Clear sediment, stones and debris in the culvert, U-Channel and gullies etc (drainage system) frequently.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	03/07/08	Drying out the standing water in the valley to prevent mosquito breed. (especially at <b>STR13</b> )	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	03/07/08	Re-arrange the stream diversion to prevent silty water from discharging out (in-progress) (especially at <b>Stream 19-20</b> ).	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	09/07/08	Clear sediment, stones and debris in the culvert, U-Channel and gullies etc (Drainage system) frequently.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	17/07/08	Keep clear sediment, stones and debris in the culvert, U-Channel and gullies etc (Drainage system).	Rectification/improvement was observed during the follow-up audit session.

### Non-compliance Recorded during Site Inspections

5.9 No non-compliance was recorded in the reporting period.

### Summary of Mitigation Measures Implemented

5.10 The Contractor has implemented the mitigation measures as recommended in the EIA and the Updated EM&A Manual. The mitigation measures implemented by the Contractor in the reporting month are summarized as follow:

#### *Water Quality*

- (1) Covered the exposed slope at underneath STR16.
- (2) Covered the exposed slope at RW7.
- (3) Cleared the oil spillage at the entrance of STR7.

- (4) Cleared the stagnant water in the discarded sedimentation tanks near the catchwater.
- (5) Re-arranged the stream diversion at Stream 19.
- (6) Provided mitigation measures to prevent silty water running in the underground channel at STR7.
- (7) Cleared standing water at CH4300 (Existing TCR).
- (8) Provided mitigation measures to prevent silty water from discharging to U-Channel at underneath STR7.
- (9) Covered the exposed surface at SD10-19 when it is not in works.

#### *Air Quality*

- (10) Covered the stockpile at opposite to RW11. (OTCR)
- (11) Covered the stockpile at old TCR when it is not in works.

#### *Waste/Chemical Management*

- (12) Cleared the cement bags (abandon) at underneath RW38.
- (13) Cleared discarded plants at underneath between STR13-14.
- (14) Provided drip tray for the oil container at the entrance of STR7.

#### *General*

- (15) Keep cleared sediment, stones and debris in the culvert, U-Channel and gullies etc (Drainage system).

- 5.11 According to the Updated EM&A Manual, mitigation measures are required to be implemented. An updated summary of the EMIS is provided in Appendix J.

### **Summary of Exceedances of the Environmental Quality Performance Limit**

#### *24-hr TSP Monitoring*

- 5.12 No Action/Limit Level exceedance was recorded in the reporting month.

#### *Construction Noise Monitoring*

- 5.13 No Action/Limit Level exceedance was recorded in the reporting month.

#### *Water Quality Monitoring*

- 5.14 Exceedances of turbidity (NTU) and suspended solids (SS) were recorded in water samples in the reporting month. The summary of exceedances is provided in Table 4.4.
- 5.15 All exceedances recorded for water quality parameters in the reporting month were not considered due to the Project due to the following observations:

- ✧ No construction activity was observed in the vicinity of the sampling locations.
  - ✧ No pollution discharge from construction activity was observed.
  - ✧ Measured value at the reference station was higher than at the impact monitoring stations.
- 5.16 No direct evidence demonstrated the exceedances of Action/Limit level for water monitoring parameters in the reporting month were caused by the Project.

#### **Implementation Status of Event Action Plans**

- 5.17 The Event Action Plans for air quality, noise and water quality are presented in Appendix K.
- 5.18 No valid exceedance of Action and Limit levels for air quality, noise and water quality monitoring due to the Project was recorded. No action was required to be carried out.

#### **Summary of Complaint, Warning, Notification of any Summons and Successful Prosecution**

- 5.19 No environmental complaint was received in the reporting month.
- 5.20 No warning and summon or notification of successful prosecution was received in the reporting month.
- 5.21 There were a total of 51 environmental complaints, 12 warnings, 3 summons and 2 successful prosecutions received since the commencement of the Project.
- 5.22 The Complaint Log is attached in Appendix L and the summary of warnings issued by the EPD and prosecution is attached in Appendix M.

## 6. FUTURE KEY ISSUES

### Key Issues for the Coming Month

6.1 Key issues to be considered in the coming month include:

- Runoff from exposed slope;
- Wastewater and runoff discharge from site;
- Regular removal of silt, mud and sand along u-channels and sedimentation tanks;
- Review and implementation of temporary drainage system for the surface runoff;
- Proper storage of construction materials near streams;
- Noise from operation of the equipment, especially for rock-breaking activities and machinery on-site;
- Dust generation from stockpiles of dusty materials, exposed retain wall, excavation works and rock breaking activities;
- Storage of chemicals/fuel and chemical waste/waste oil on site;
- Watering for rock breaking activity, soil nailing and on haul road; and
- Accumulation of general and construction waste near stream and on site.

### Monitoring Schedule for the Next Month

6.2 The tentative monitoring schedule for the next month is given in Appendix C.

### Construction Program for the Project (Construction Program for the Next Month)

6.3 The major construction activities in the coming month include:

#### *Northern Section*

- Installation of street furniture at Zone A to C;
- Slope work slope drainage and street furniture at Zone D;
- Slope work at Zone E; and
- Slope work and street furniture at Zone F.



*Southern Section*

- Construction of footpath at Zone 1 to 3;
- Erection of rock fall protection fence at Zone 4; and
- Slope works at Zone 5 and Zone 6.

## 7. CONCLUSIONS AND RECOMMENDATIONS

### Conclusions

- 7.1 Air quality, noise and water quality monitoring works were performed in the reporting month and all monitoring results were checked and reviewed.
- 7.2 24-hour TSP monitoring was conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded in the reporting month.
- 7.3 Construction noise monitoring was conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded in the reporting month.
- 7.4 Water quality monitoring was conducted as scheduled in the reporting month.
- 7.5 No valid Action/Limit Level exceedance for water quality was recorded in the reporting month.
- 7.6 No environmental complaint was received in the reporting month.
- 7.7 No warning and summon and notification of successful prosecution was received in the reporting month.

### Recommendations

- 7.8 According to the environmental audit performed in the reporting month, the following recommendations were made:

#### *Dust Impact*

- To implement dust suppression measures on all haul roads, stockpiles and dry surfaces in dry weather.
- To implement dust control measures for the dust generation work such as excavation, piling works and rock breaking.
- To ensure water spray being applied for the dust emissive works, such as soil nail installation, loading and unloading of soil materials, excavation works and rock dowel installation.
- To cover soil stockpiles and exposed slope surface by impervious tarpaulin sheets or other means.
- To ensure that all vehicles carrying dusty material are properly covered before leaving the site.
- To maintain the machinery and vehicles in a good working condition on site.

*Noise Impact*

- To implement appropriate mitigation measures, such as cover the tip of the hammer, in order to minimize the noise emitted during rock-breaking activities.
- To review the works sequence of site activities so as to reduce the number of noisy equipment in concurrent operation.
- To employ quiet powered mechanical equipment if possible.
- To ensure compliance of CNP conditions during restricted-hour works.
- To follow up any exceedance caused by the construction works.
- To space out noisy equipment and position as far away as possible from sensitive receivers.

*Water Quality Impact*

- To prevent any surface runoff discharge into any stream course.
- To review and implement temporary drainage system.
- To identify any wastewater discharges from site.
- To ensure properly maintenance for de-silting facilities.
- To clear the silt and sediment in the sedimentation tanks.
- To review the capacity of de-silting facilities for discharge.
- To divert all the water generated from construction site to de-silting facilities with enough handling capacity before discharge.
- To avoid accumulation of stagnant and ponding water on site.
- To follow up any exceedance caused by the construction works.

*Waste / Chemical Management*

- To ensure the performance of sorting of C&D materials at source (during generation).
- To carry out inspection of dump truck at site exit to ensure inert and non-inert C&D materials are properly segregated before removing off site.
- To ensure proper collection and disposal of rubbish generated on site.
- To avoid storage of oil container within the Country Park.
- To avoid any discharge or accidental spillage of chemical waste directly from the site.
- To avoid storage of construction materials at any stream.
- To check for any accumulation of waste materials or rubbish on site.
- To remove ponding water regularly in drip trays on site.


---

---


## FIGURES

---

---

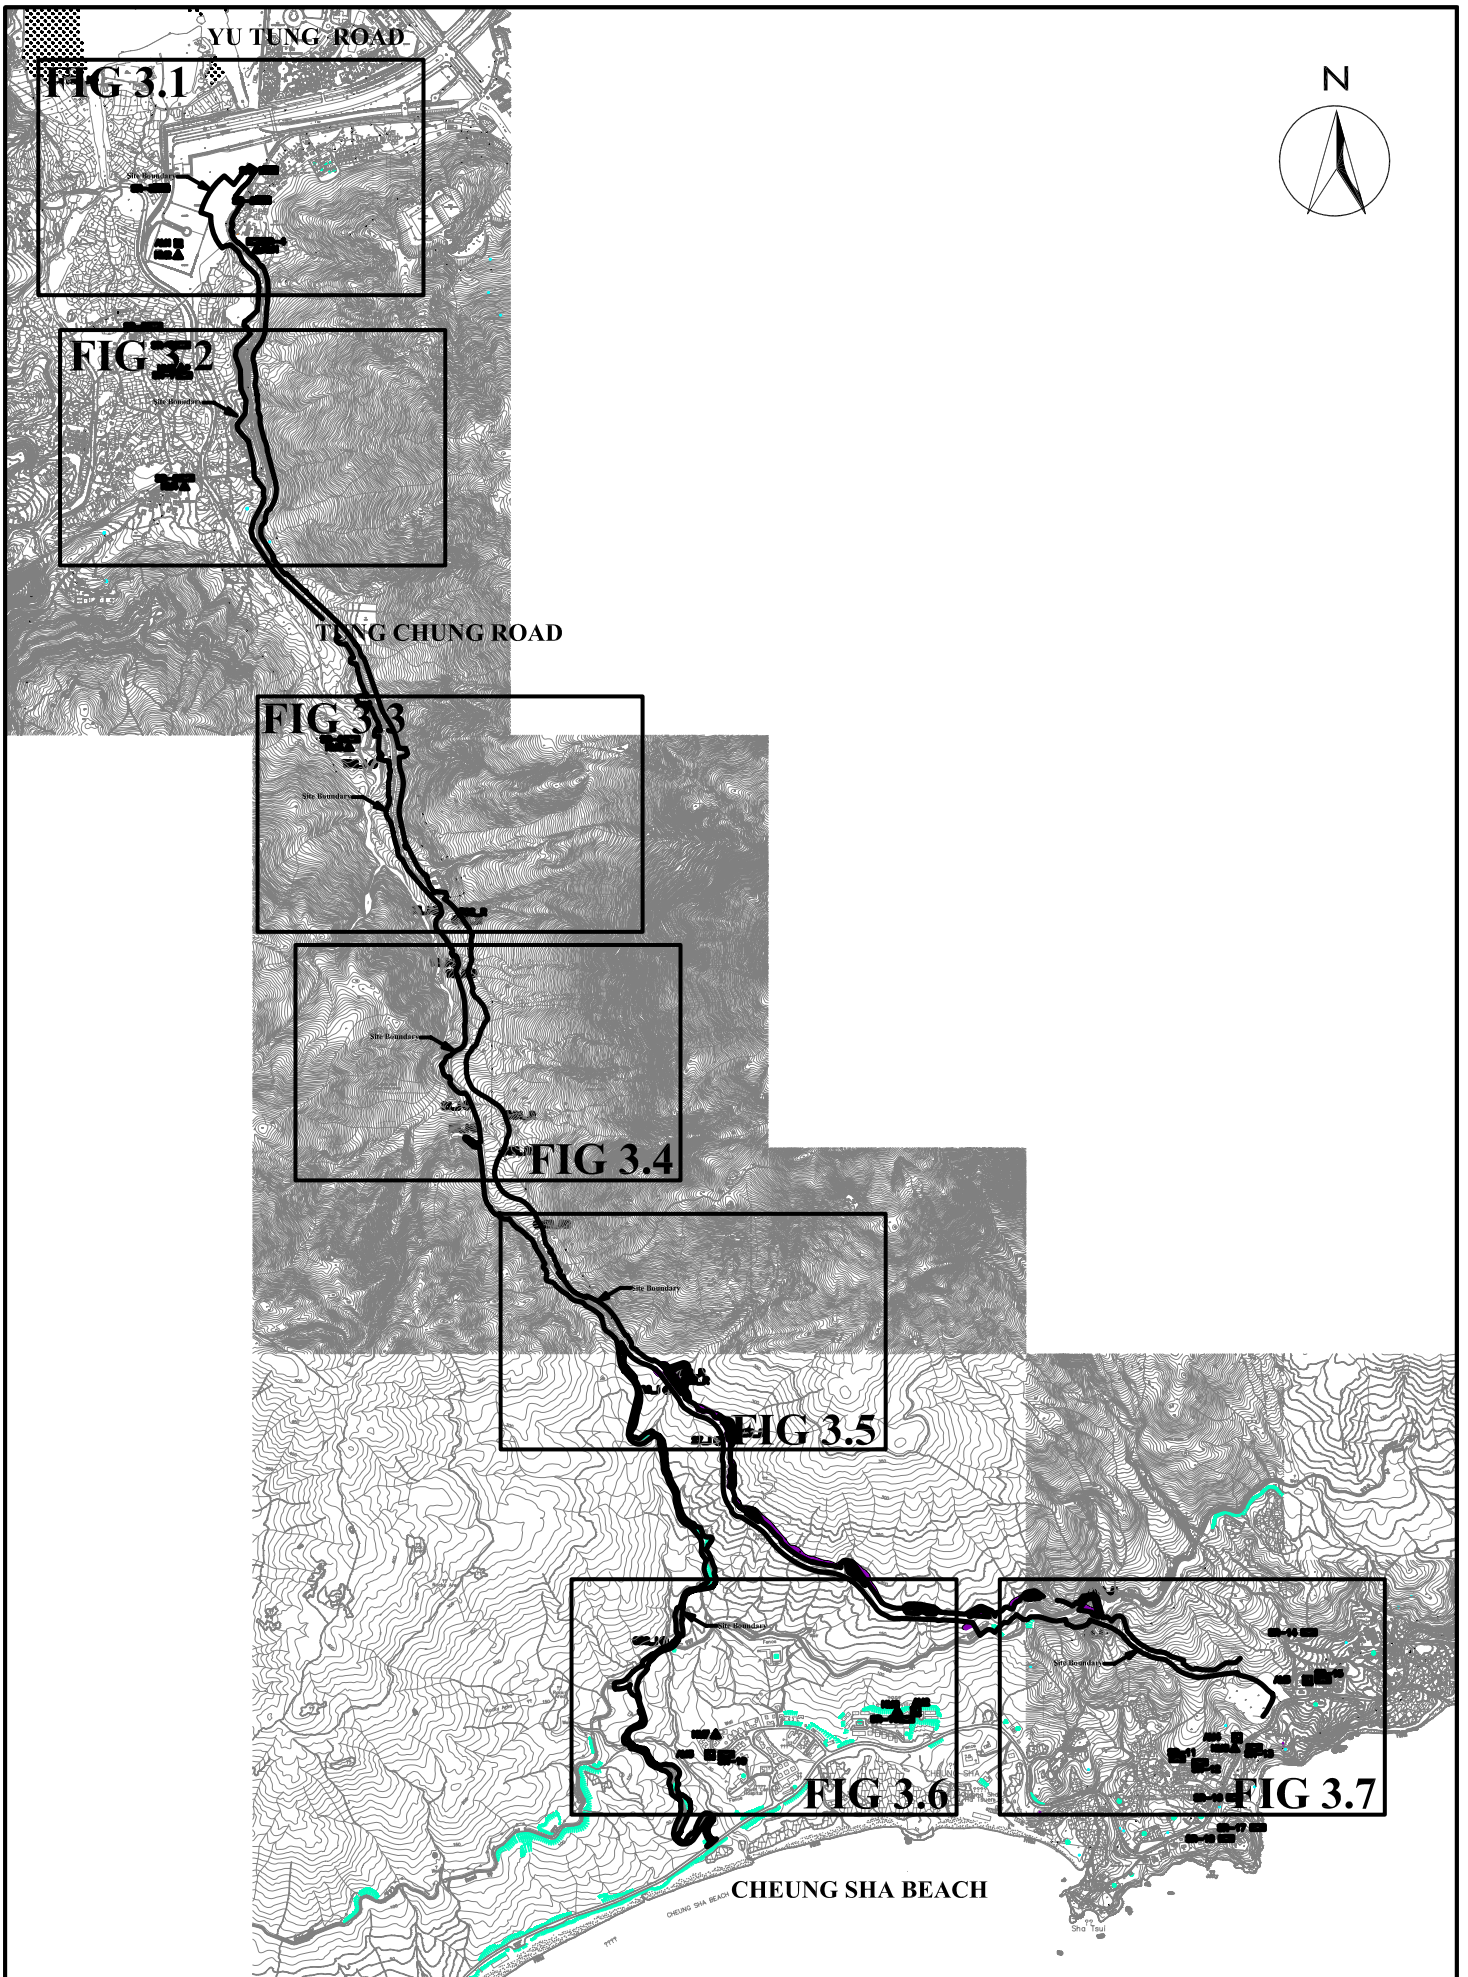


 <p><b>CINOTECH</b> Cinotech Consultants Limited</p>	<p><b>IMPROVEMENT TO TUNG CHUNG ROAD BETWEEN LUNG TSENG TAU AND CHEUNG SHA</b></p> <p><b>SITE LOCATION PLAN</b></p>	SCALE	N.T.S.	DATE	OCT 2006
		CHECK	JY	DRAWN	VL
		JOB No.	MA6030	DRAWING No.	FIG 1

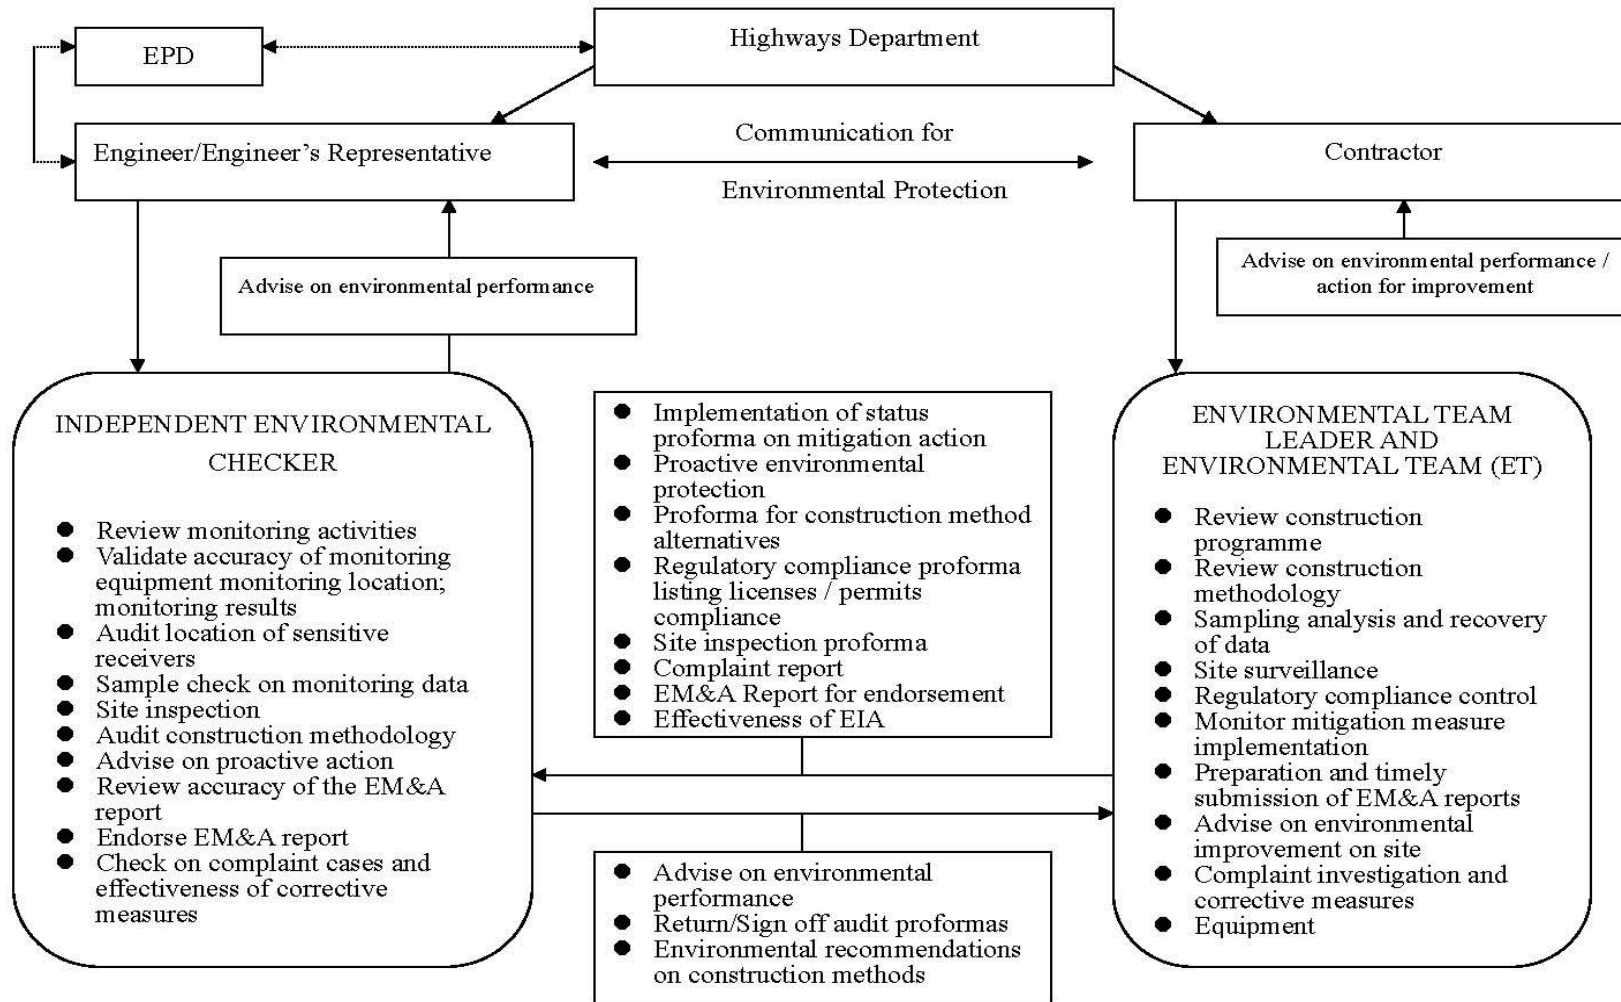

SCALE	N.T.S.	DATE	2007
CHECK	KL	DRAWN	FL
JOB NO.	MA6030	DRAWING No.	2
		Rev	1



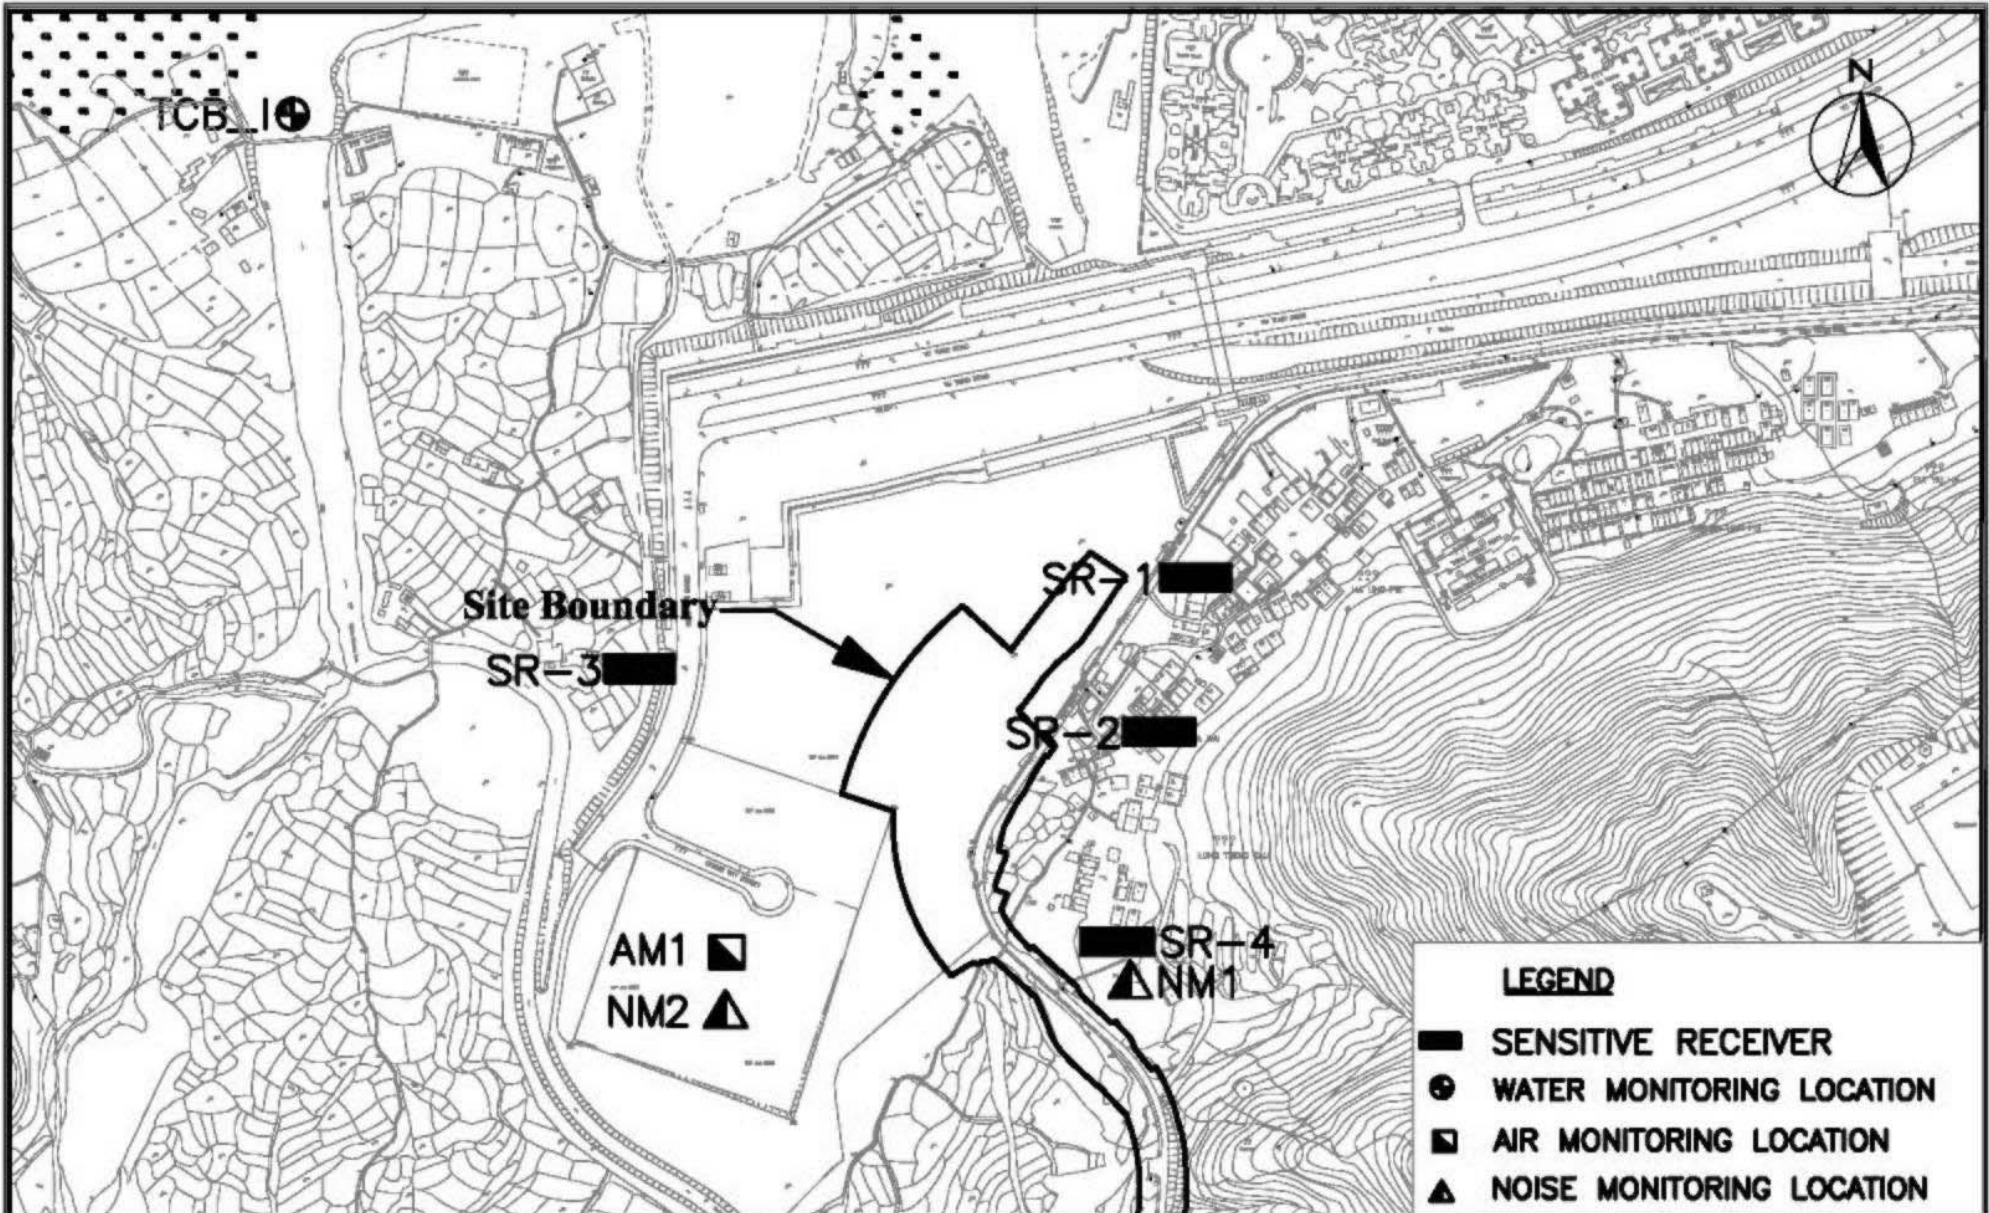






IMPROVEMENT TO TUNG CHUNG ROAD BETWEEN LUNG TSENG TAU AND CHEUNG SHA

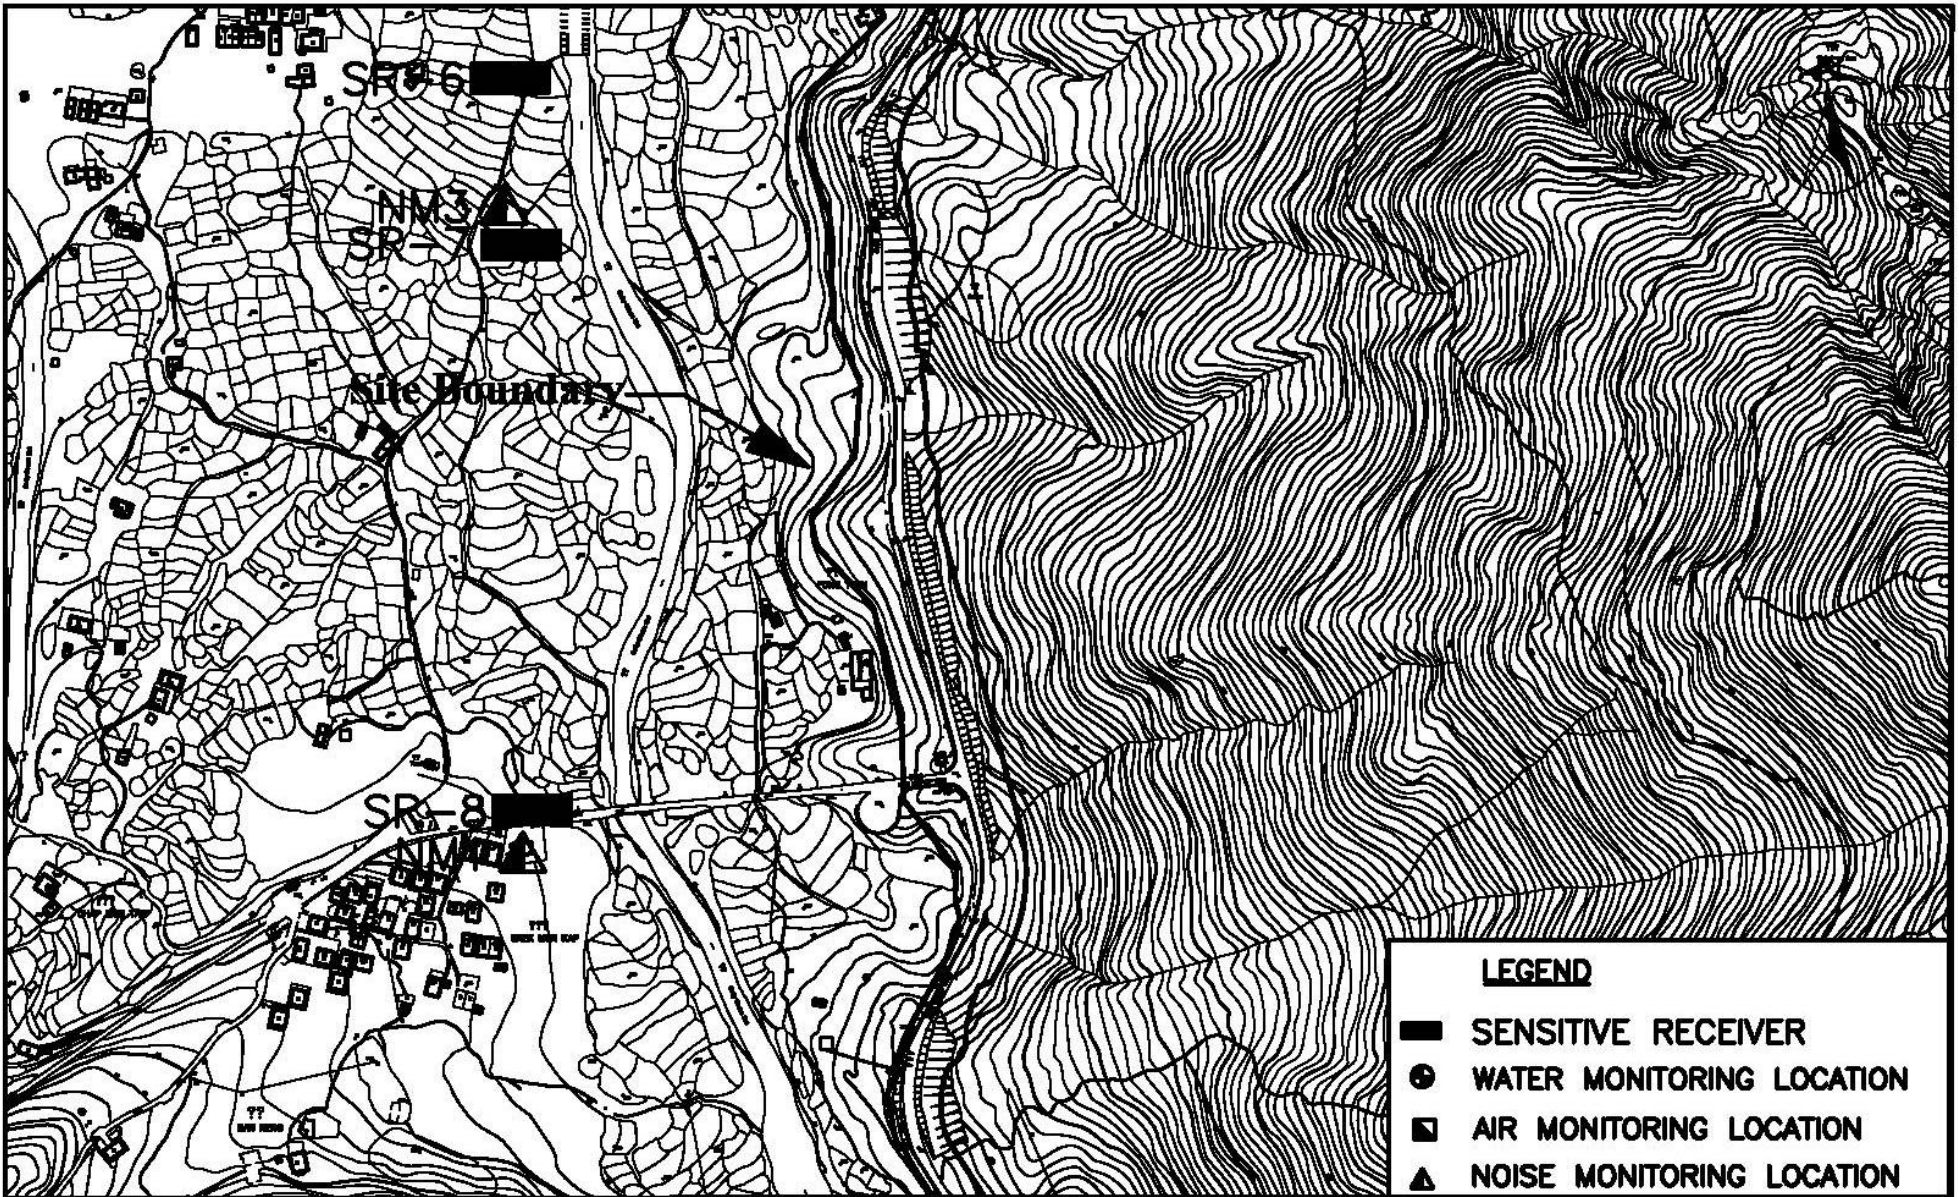

**MONITORING LOCATIONS  
(SHEET 1 OF 7)**

SCALE	A4 1:4000	DATE	OCT 2006
CHECK	JY	DRAWN	VL
JOB No.	MA6030	DRAWING No.	FIG 3.1
		REV	1



LEGEND	
	SENSITIVE RECEIVER
	WATER MONITORING LOCATION
	AIR MONITORING LOCATION
	NOISE MONITORING LOCATION


IMPROVEMENT TO TUNG CHUNG ROAD BETWEEN LUNG TSEUNG TAU AND CHEUNG SHA

**CNOTECH**  
Cinotech Consultants Limited

**MONITORING LOCATIONS  
(SHEET 2 OF 7)**

SCALE	A4 1:4000	DATE	OCT 2006
CHECK	JY	DRAWN	VL
JOB No.	MA6030	DRAWING No.	FIG 3.2
		REV	1



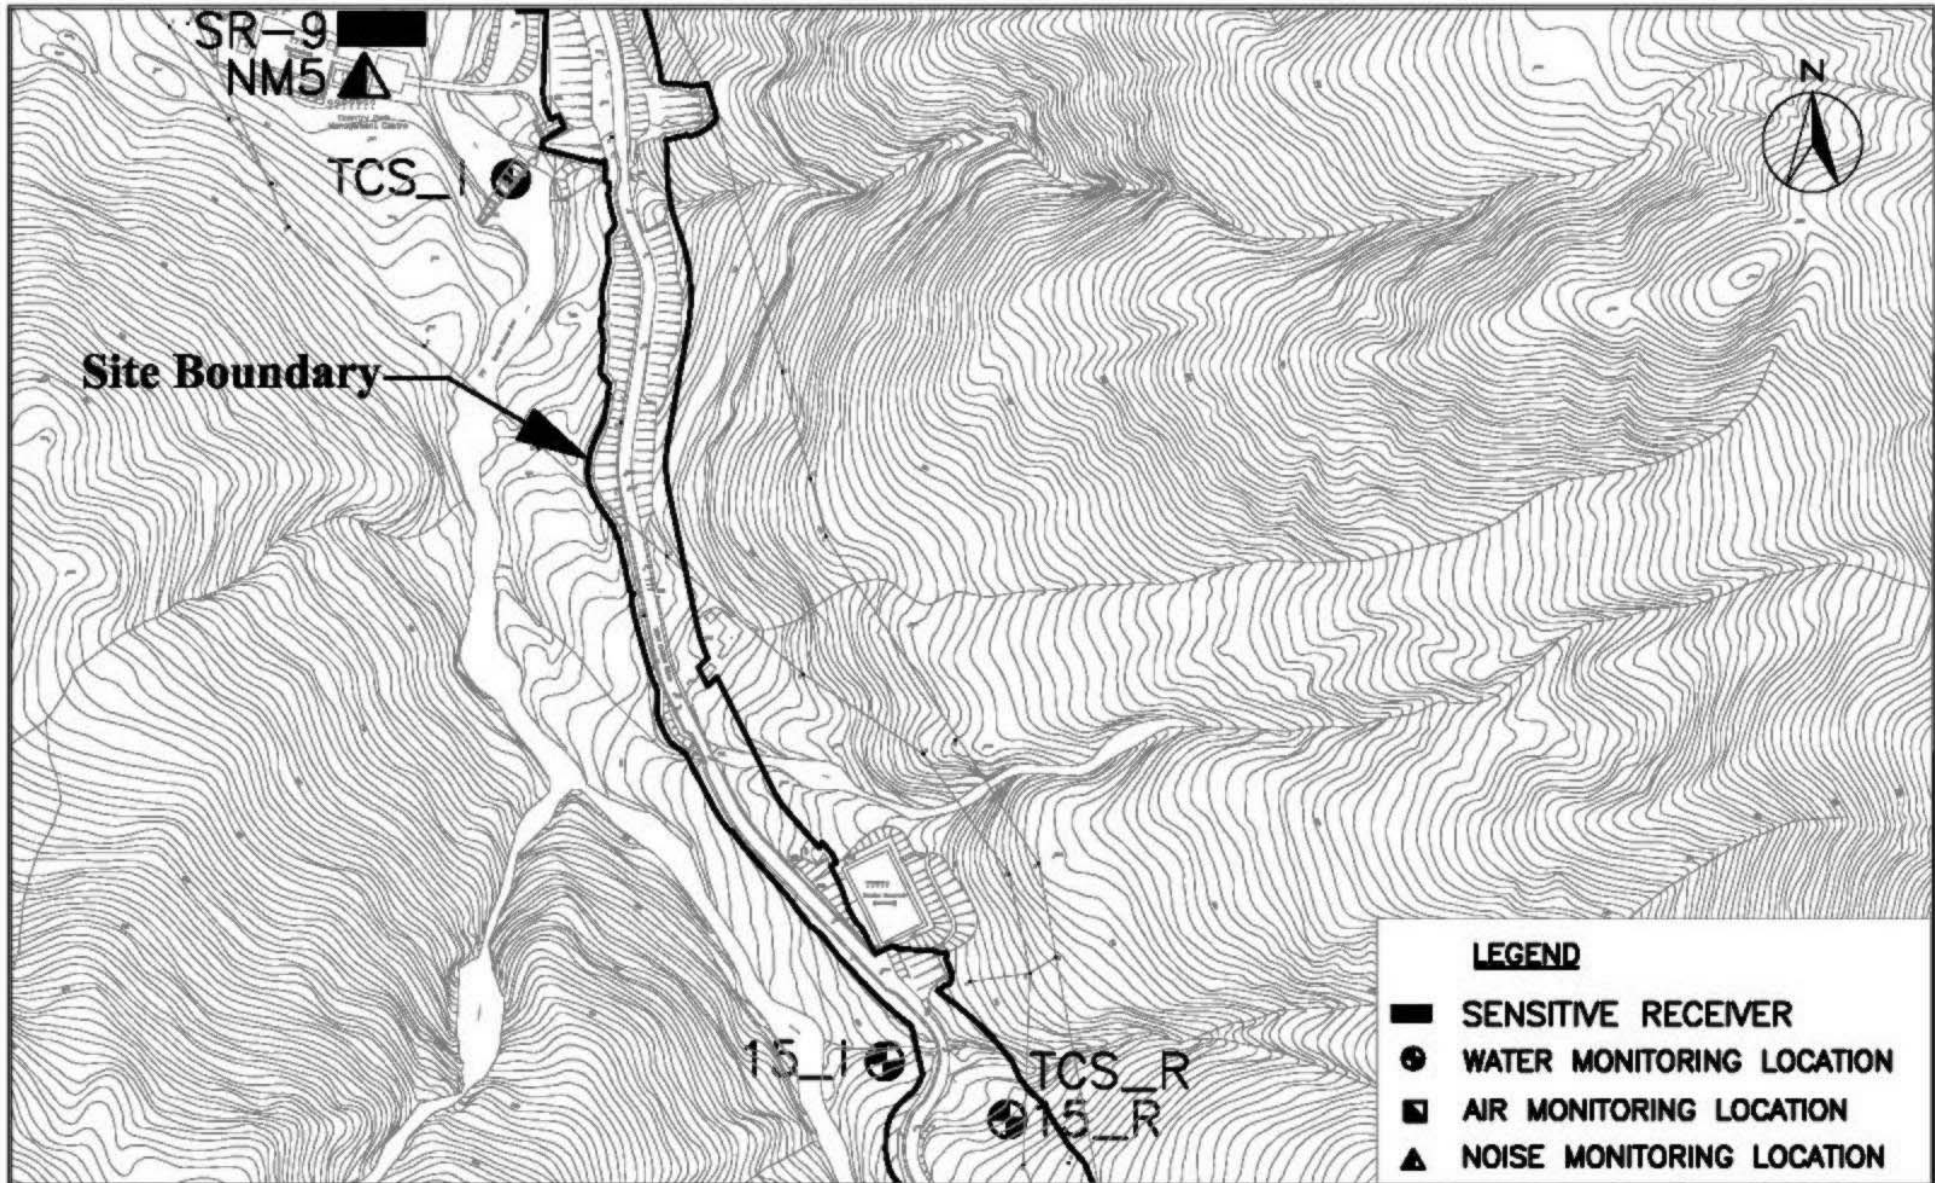

**LEGEND**


- SENSITIVE RECEIVER
- WATER MONITORING LOCATION
- AIR MONITORING LOCATION
- ▲ NOISE MONITORING LOCATION



IMPROVEMENT TO TUNG CHUNG ROAD BETWEEN LUNG TSENG TAU AND CHEUNG SHA

**MONITORING LOCATIONS  
(SHEET 3 OF 7)**

SCALE	A4 1:4000	DATE	OCT 2006
CHECK	JY	DRAWN	VL
JOB No.	MA6030	DRAWING No.	FIG 3.3
		REV	1

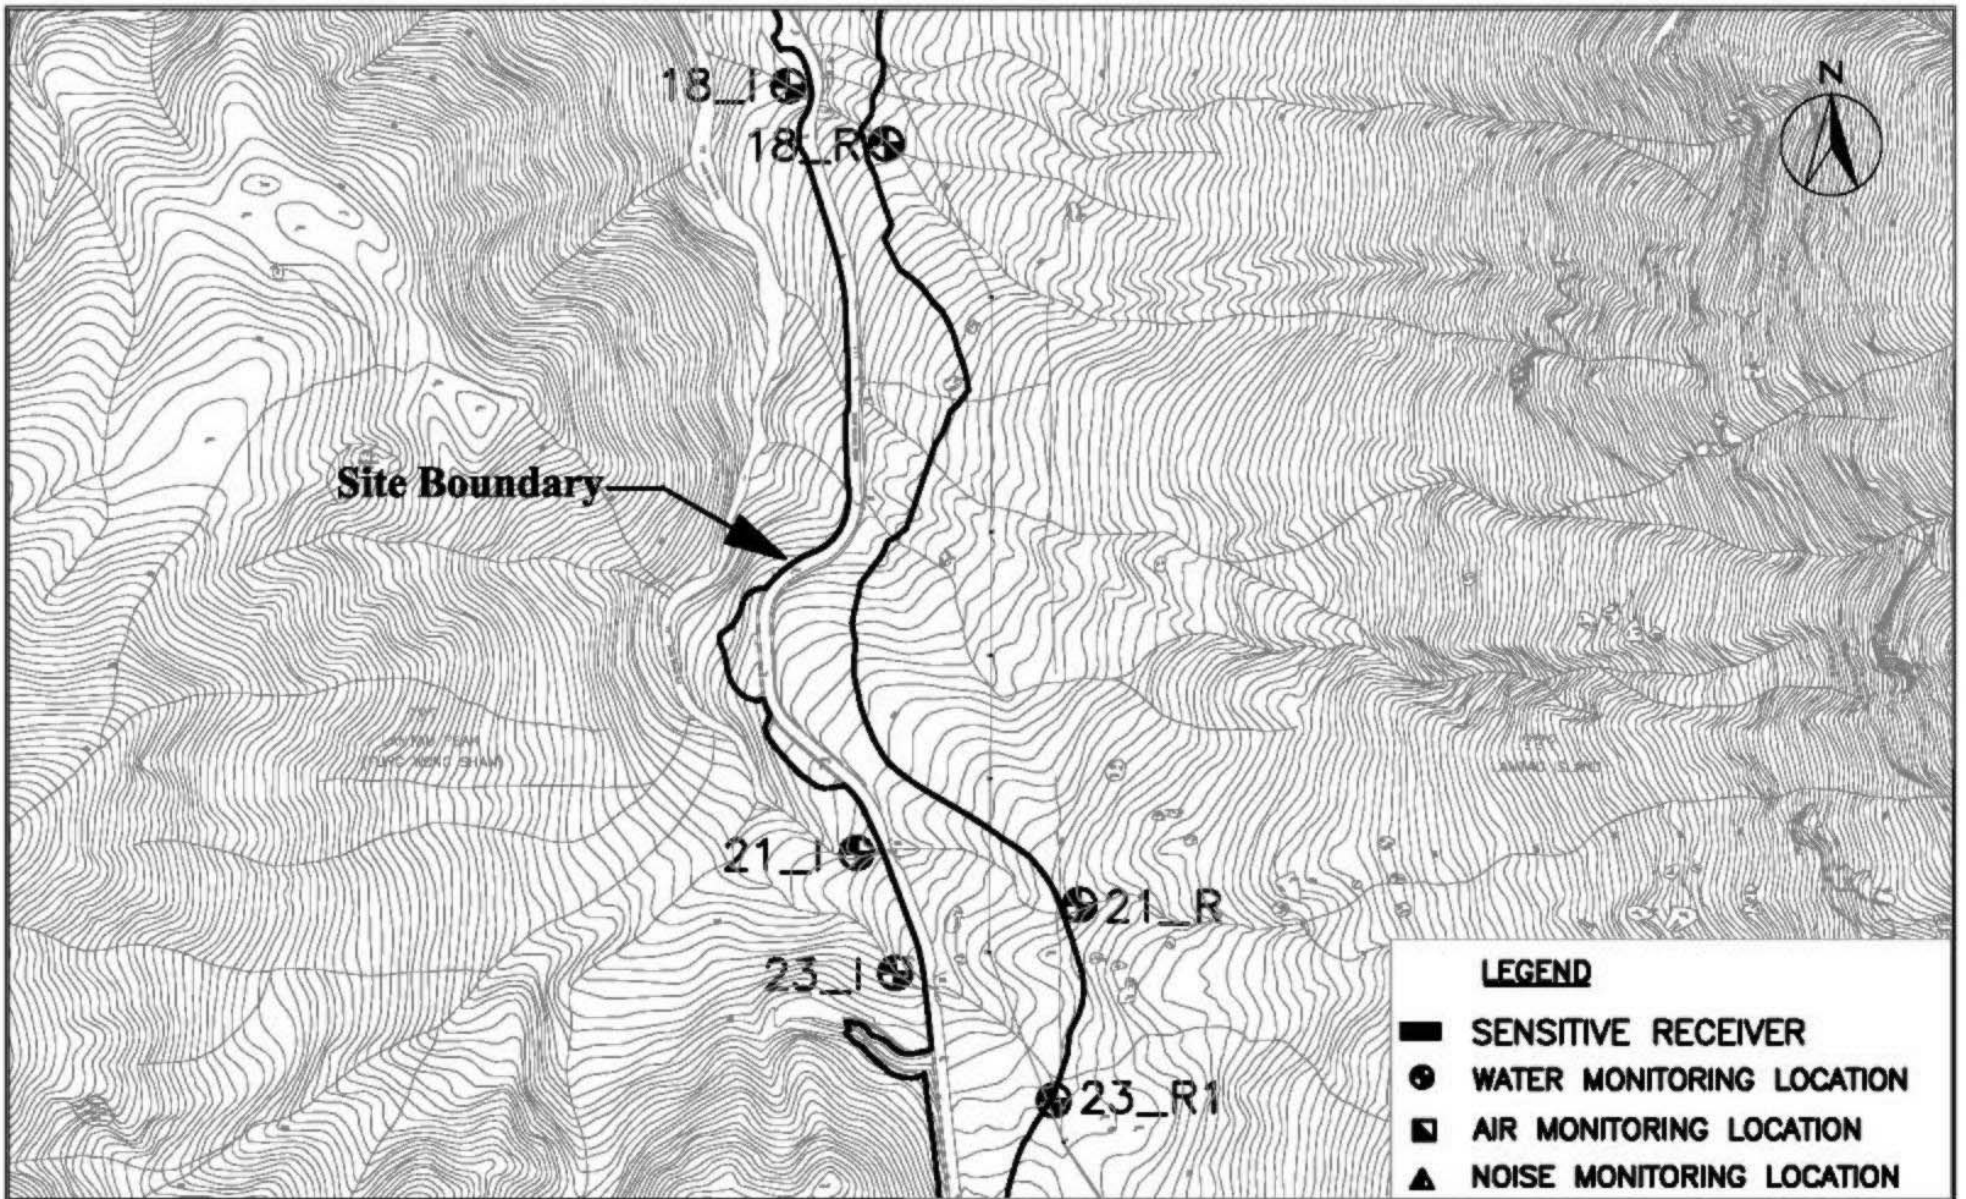

**LEGEND**

- SENSITIVE RECEIVER
- WATER MONITORING LOCATION
- AIR MONITORING LOCATION
- ▲ NOISE MONITORING LOCATION




IMPROVEMENT TO TUNG CHUNG ROAD BETWEEN LUNG TSENG TAU AND CHEUNG SHA

**MONITORING LOCATIONS  
(SHEET 4 OF 7)**

SCALE	A4 1:4000	DATE	OCT 2006
CHECK	JY	DRAWN	VL
JOB No.	MA6030	DRAWING No.	FIG 3.4
		REV	1



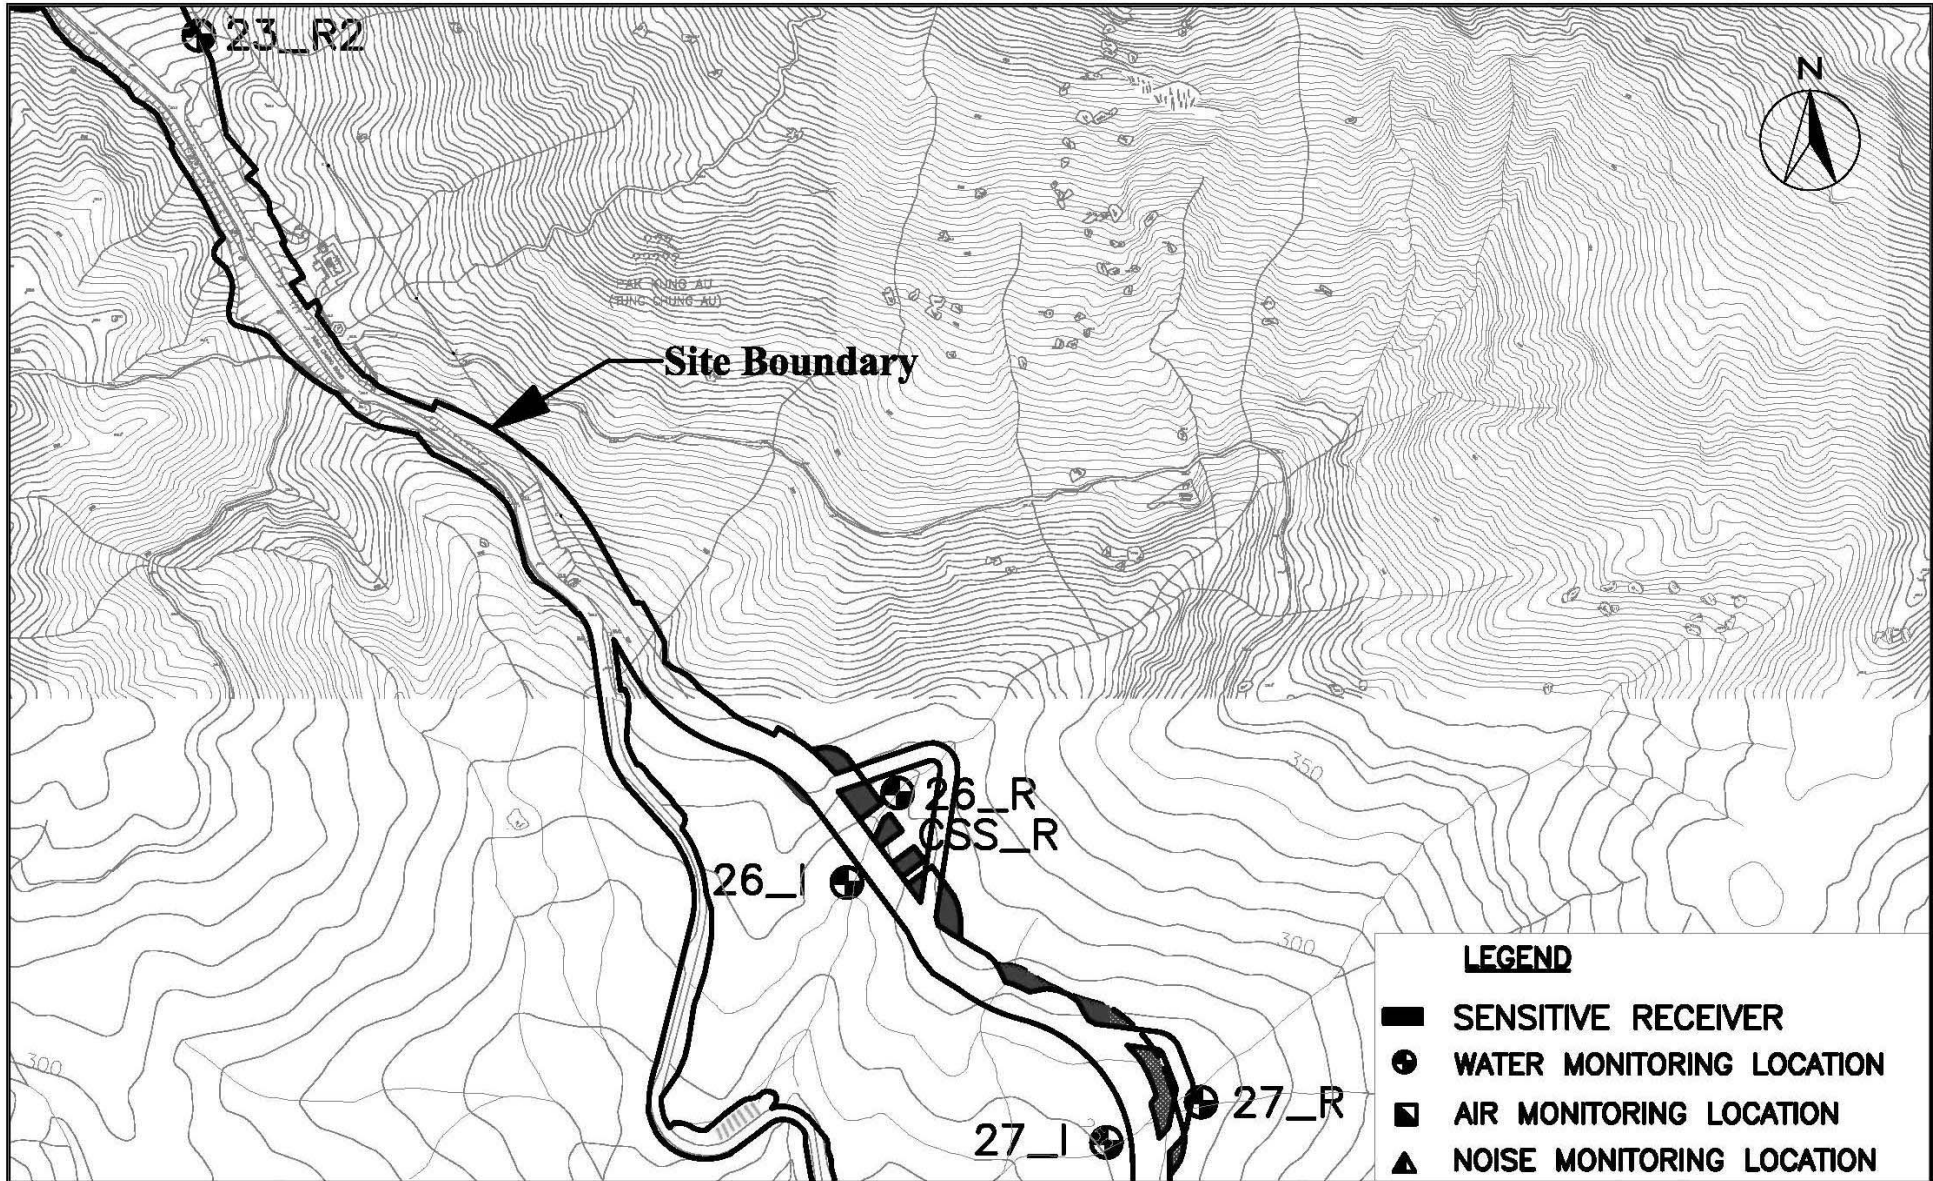


IMPROVEMENT TO TUNG CHUNG ROAD BETWEEN LUNG TSENG TAU AND CHEUNG SHA



**MONITORING LOCATIONS  
(SHEET 5 OF 7)**


SCALE	A4 1:4000	DATE	OCT 2006
CHECK	JY	DRAWN	VL
JOB No.	MA6030	DRAWING No.	FIG 3.5
		REV	1

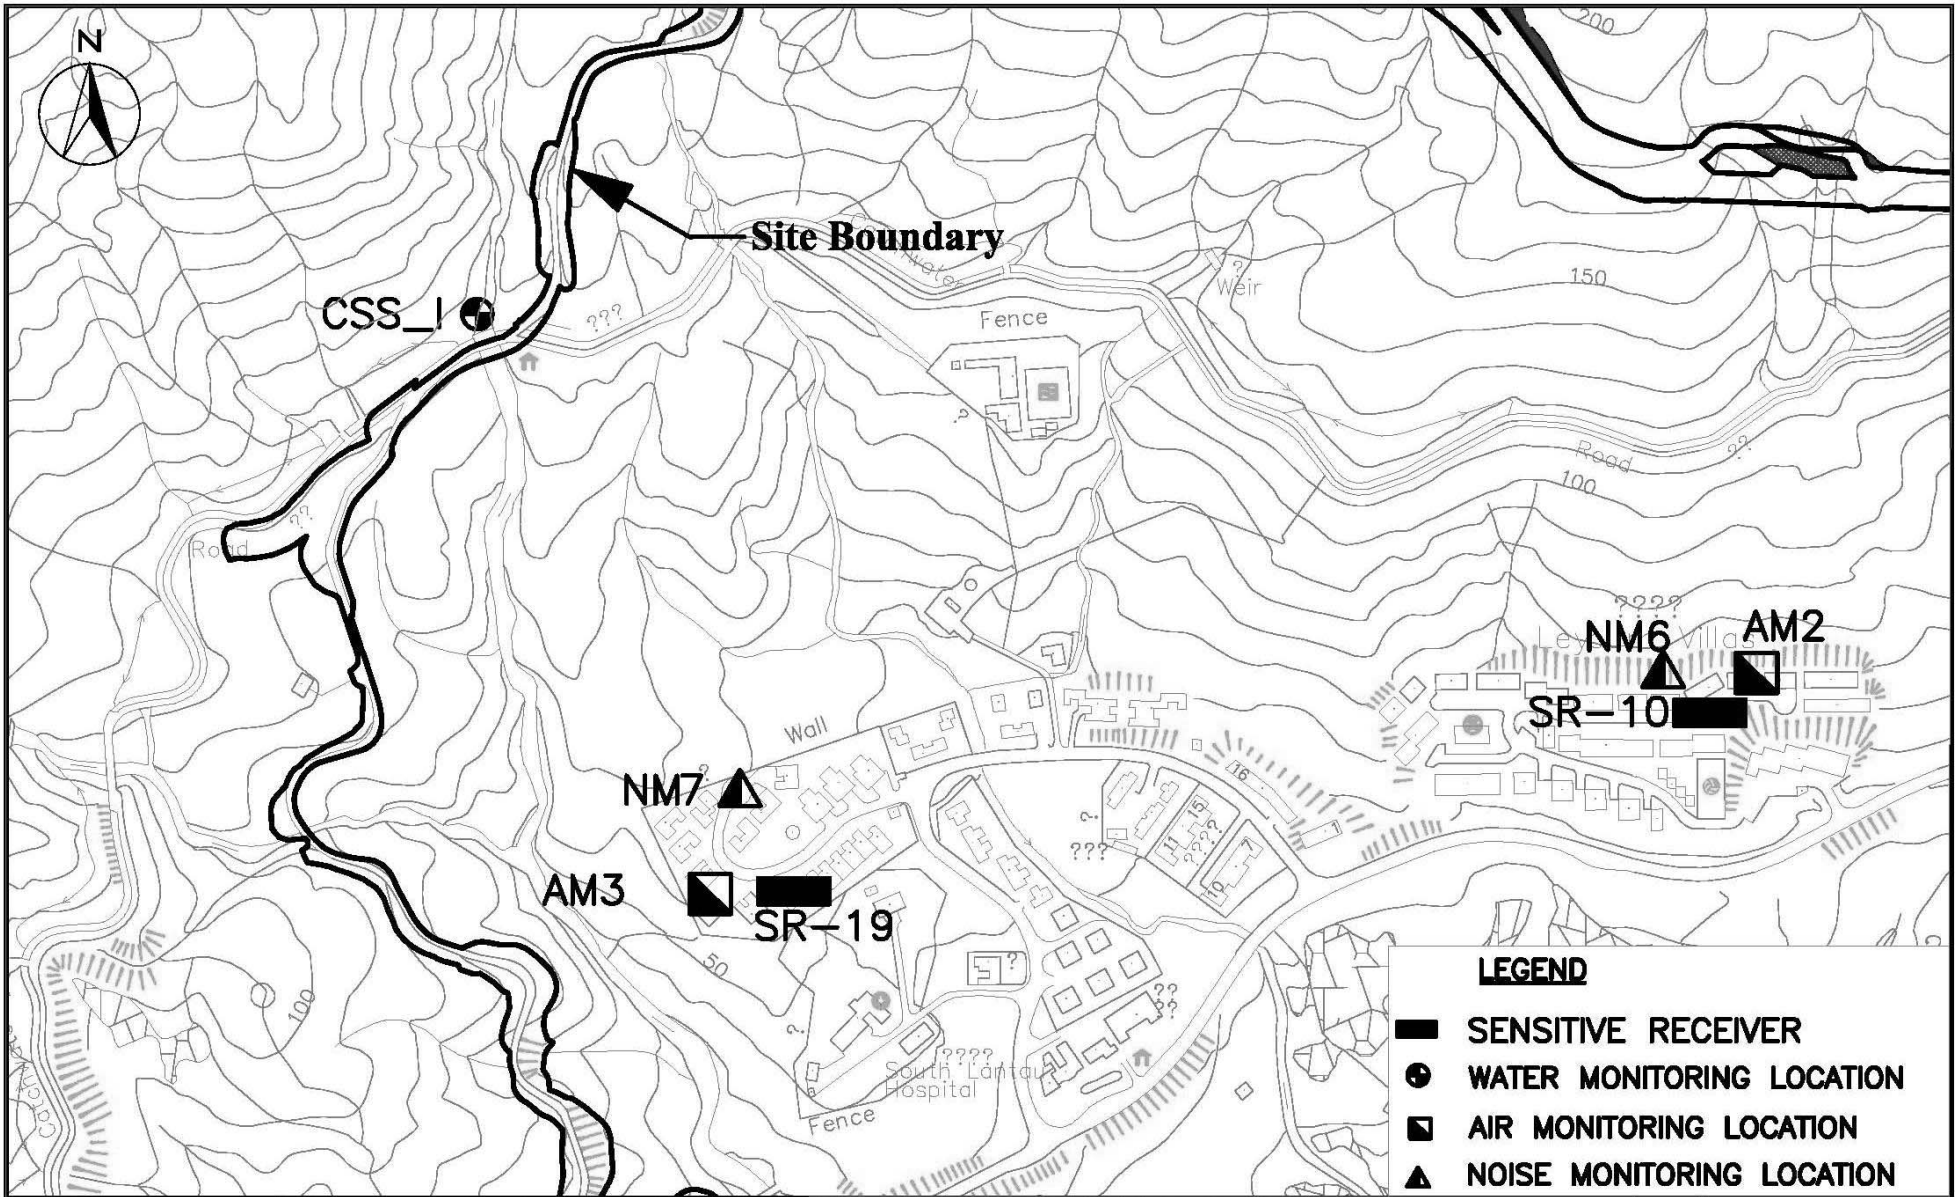

LEGEND	
	SENSITIVE RECEIVER
	WATER MONITORING LOCATION
	AIR MONITORING LOCATION
	NOISE MONITORING LOCATION

 Cinotech Consultants Limited	IMPROVEMENT TO TUNG CHUNG ROAD BETWEEN LUNG TSENG TAU AND CHEUNG SHA	
	<b>MONITORING LOCATIONS</b> (SHEET 6 OF 7)	

SCALE	A4 1:4000	DATE	OCT 2006
CHECK	JY	DRAWN	VL
JOB No.	MA6030	DRAWING No.	FIG 3.6
		REV	1

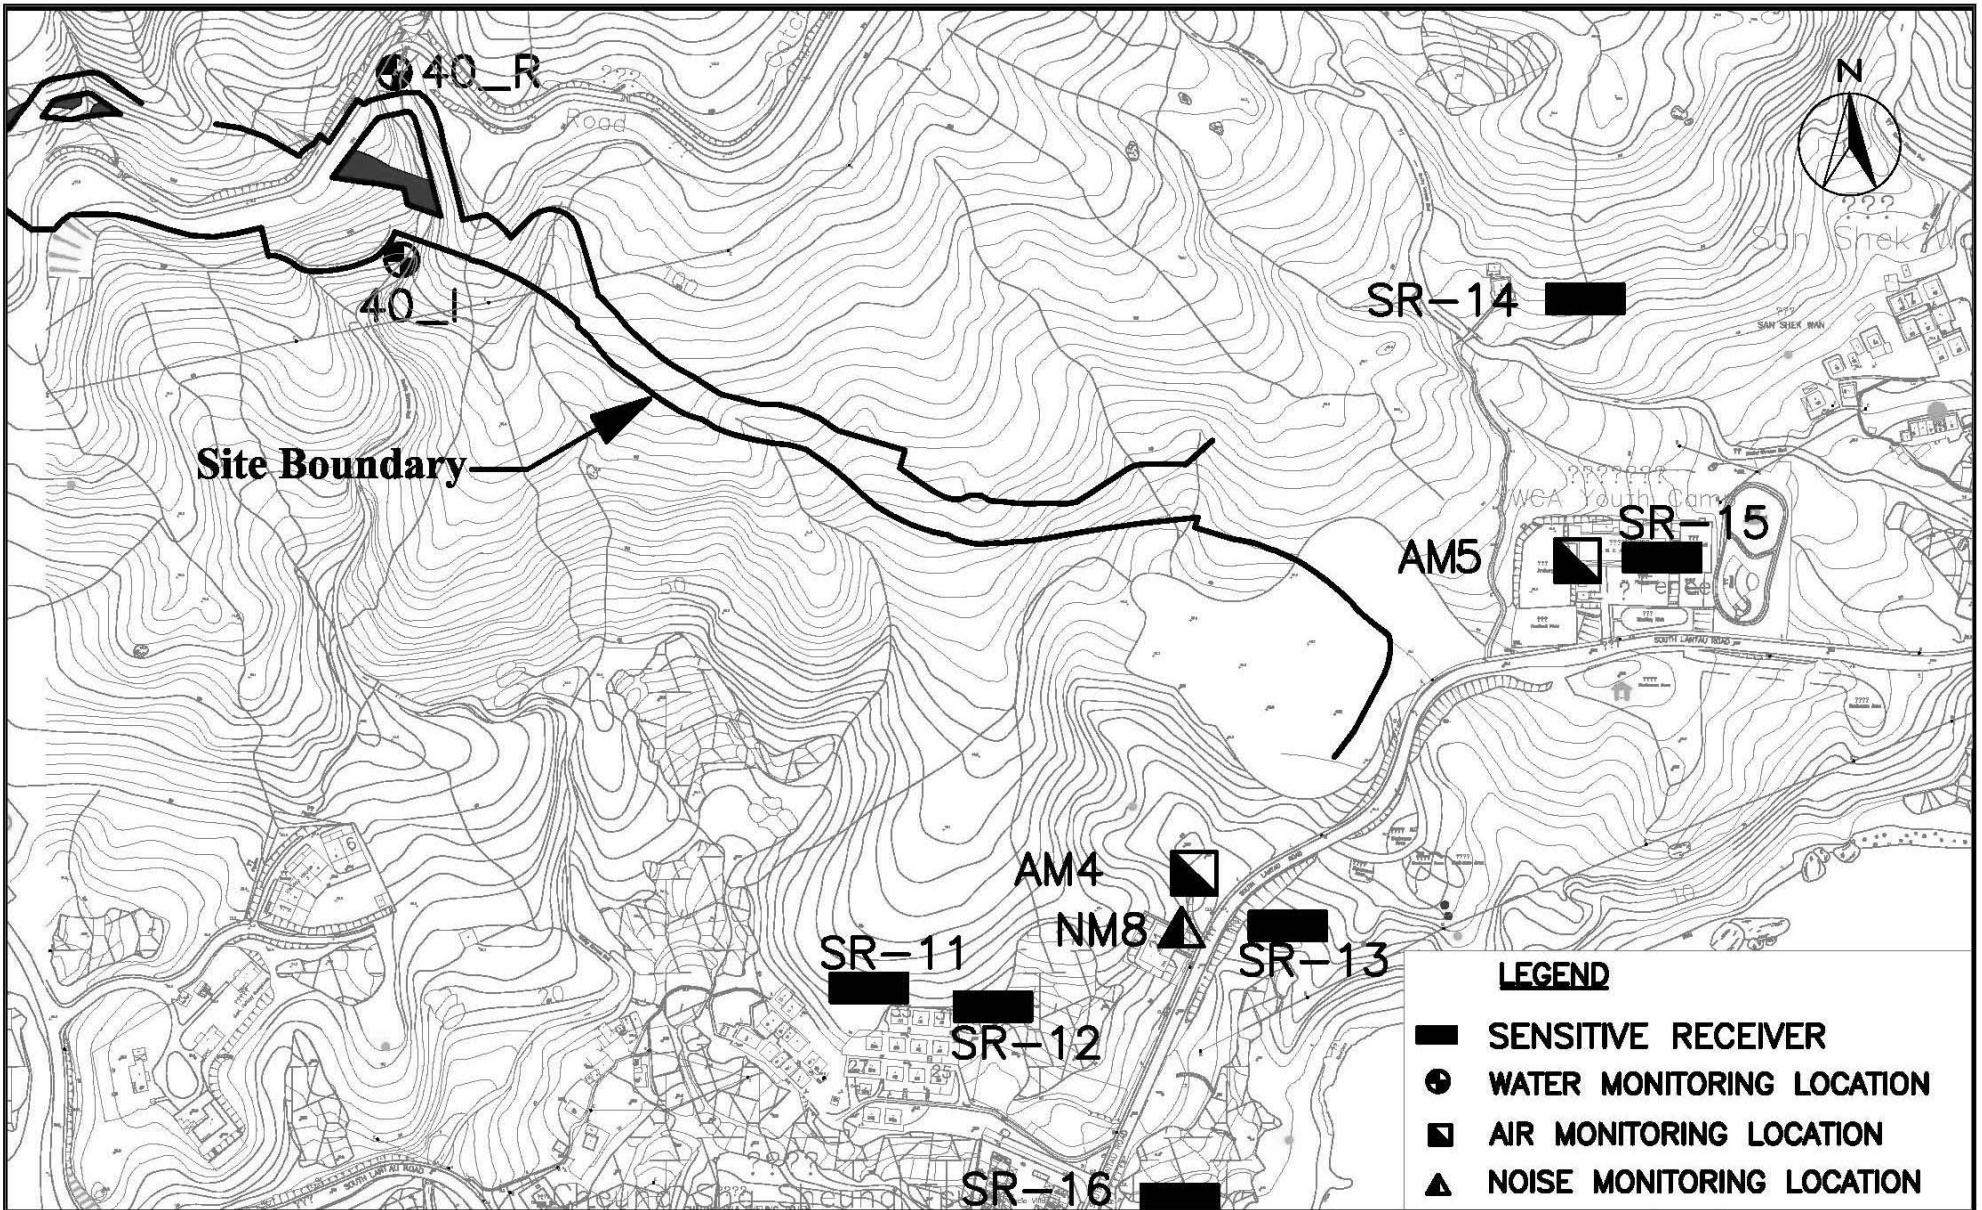

IMPROVEMENT TO TUNG CHUNG ROAD BETWEEN LUNG TSENG TAU AND CHEUNG SHA



**MONITORING LOCATIONS  
(SHEET 7 OF 7)**

SCALE	A4 1:4000	DATE	OCT 2006
CHECK	JY	DRAWN	VL
JOB No.	MA6030	DRAWING No.	FIG 3.7
		REV	1



---

---

**APPENDIX A  
ACTION AND LIMIT LEVELS FOR AIR  
QUALITY, NOISE AND WATER  
QUALITY**

---

---

## Appendix A - Action and Limit Levels

**Table A-1 Action and Limit Levels for 1-Hour TSP**

Location	Action Level, $\mu\text{g}/\text{m}^3$	Limit Level, $\mu\text{g}/\text{m}^3$
AM1	312	500
AM2	328	
AM3	302	
AM4	305	
AM5	342	

**Table A-2 Action and Limit Levels for 24-Hour TSP**

Location	Action Level, $\mu\text{g}/\text{m}^3$	Limit Level, $\mu\text{g}/\text{m}^3$
AM1	155	260
AM2	151	
AM3	141	
AM4	145	
AM5	153	

**Table A-3 Action and Limit Levels for Construction Noise**

Period	Action Level <sup>(2)</sup>	Limit Level	
		0700-1900 hrs on normal weekdays	When one documented complaint is received
1900-2300 hrs on holidays & 0700-2300 hrs on all other days	- <sup>(1)</sup>		
2300-0700 hrs of next day	- <sup>(1)</sup>		

\*Free field noise levels were adjusted with a correction of +3 dB(A)

Notes:

- (1) The noise limits shall be determined by EPD during the application of the construction noise permit (CNP).
- (2) Stated in the *“Environmental Monitoring and Audit Guidelines for Development Projects in Hong Kong”*, Appendix D2, Section 2.6, Table 2.1

**Table A-4 Compliance Level for Water Quality**

Monitoring Stations	DO, mg/L		pH		Turbidity, NTU				SS, mg/L			
	Action	Limit	Action	Limit	Action		Limit		Action		Limit	
TCS_I	6.10	4.00	-	<6.5 or >8.5	5.95	or 120% of the upstream control station's Tby (at the sme tide on the same day if appropriate)	13.30	or 130% of the upstream control station's Tby (at the sme tide on the same day if appropriate)	10.30	or 120% of the upstream control station's SS (at the sme tide on the same day if appropriate)	12.00	or 130% of the upstream control station's SS (at the sme tide on the same day if appropriate)
CSS_I	6.40	4.00	-	<6.5 or >8.5	7.91		10.50		9.90		16.00	
15_I	5.94	4.00	-	<6.5 or >8.5	11.00		16.10		6.10		8.20	
18_I	6.43	4.00	-	<6.5 or >8.5	6.84		11.10		14.00		16.00	
19_I	6.55	4.00	-	<6.5 or >8.5	7.52		9.03		14.00		18.00	
21_I	6.73	4.00	-	<6.5 or >8.5	7.70		8.30		6.60		20.00	
23_I	6.55	4.00	-	<6.5 or >8.5	6.37		6.62		8.50		17.00	
26_I	6.49	4.00	-	<6.5 or >8.5	7.53		8.10		6.70		15.00	
27_I	5.33	4.00	-	<6.5 or >8.5	6.05		6.76		2.10		3.00	
32_I	5.94	4.00	-	<6.5 or >8.5	10.30		14.20		15.00		18.00	
40_I	6.42	4.00	-	<6.5 or >8.5	9.38		10.60		14.00		15.00	
TCB_I	6.31	4.00	-	<6.5 or >8.5	17.10		41.40		19.00		20.00	



---

---

**APPENDIX B  
COPIES OF CALIBRATION  
CERTIFICATES**

---

---

# High-Volume TSP Sampler 5-POINT CALIBRATION DATA SHEET

**CINOTECH**

File No. MA6030/46/0011

Station AMI - YMCA of HK Christian College

Operator: WK

Date: 10-Jun-08

Next Due Date: 9-Aug-08

Equipment No.: A-01-46

Serial No. 1315

Ambient Condition			
Temperature, Ta (K)	302.8	Pressure, Pa (mmHg)	759.2

Orifice Transfer Standard Information					
Equipment No.:	A-04-06	Slope, mc	0.0575	Intercept, bc	0.0395
Last Calibration Date:	10-Mar-08	$mc \times Qstd + bc = [\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$			
Next Calibration Date:	9-Mar-09	$Qstd = \{[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2} - bc\} / mc$			

Calibration of TSP Sampler					
Calibration Point	Orifice			HVS	
	$\Delta H$ (orifice), in. of water	$[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$	Qstd (CFM) X - axis	$\Delta W$ (HVS), in. of oil	$[\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$ Y-axis
1	11.5	3.36	57.79	8.4	2.87
2	9.6	3.07	52.74	6.6	2.55
3	7.4	2.70	46.22	5.0	2.22
4	5.1	2.24	38.26	3.1	1.75
5	3.3	1.80	30.64	2.1	1.44

By Linear Regression of Y on X

Slope, mw = 0.0532

Intercept, bw = -0.2381

Correlation coefficient\* = 0.9976

\*If Correlation Coefficient < 0.990, check and recalibrate.

### Set Point Calculation

From the TSP Field Calibration Curve, take Qstd = 43 CFM

From the Regression Equation, the "Y" value according to

$$mw \times Qstd + bw = [\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$$

Therefore, Set Point;  $W = (mw \times Qstd + bw)^2 \times (760 / Pa) \times (Ta / 298) =$  4.28

Remarks: \_\_\_\_\_

Conducted by: Wh Tang

Signature: \_\_\_\_\_

Date: 10/6/08

Checked by: KW

Signature: \_\_\_\_\_

Date: 10 June 2008



# High-Volume TSP Sampler

## 5-POINT CALIBRATION DATA SHEET

**CINOTECH**

File No. MA6030/AM4/001

Station No. 31 South Lantau Road (AM4) Operator: WK  
 Date: 10-Jun-08 Next Due Date: 9-Aug-08  
 Equipment No.: A-01-06 Serial No. 10576

Ambient Condition			
Temperature, Ta (K)	302.8	Pressure, Pa (mmHg)	759.2

Orifice Transfer Standard Information					
Equipment No.:	A-04-06	Slope, mc	0.0575	Intercept, bc	0.0395
Last Calibration Date:	10-Mar-08	$mc \times Qstd + bc = [\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$			
Next Calibration Date:	9-Mar-09	$Qstd = \{[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2} - bc\} / mc$			

Calibration of TSP Sampler					
Calibration Point	Orifice			HVS	
	ΔH (orifice), in. of water	[ΔH x (Pa/760) x (298/Ta)] <sup>1/2</sup>	Qstd (CFM) X - axis	ΔW (HVS), in. of oil	[ΔW x (Pa/760) x (298/Ta)] <sup>1/2</sup> Y-axis
1	11.7	3.39	58.30	8.8	2.94
2	9.5	3.06	52.46	6.9	2.60
3	7.4	2.70	46.22	5.0	2.22
4	5.1	2.24	38.26	3.1	1.75
5	3.0	1.72	29.18	1.9	1.37

By Linear Regression of Y on X

Slope, mw = 0.0550 Intercept, bw = -0.2932  
 Correlation coefficient\* = 0.9971

\*If Correlation Coefficient < 0.990, check and recalibrate.

### Set Point Calculation

From the TSP Field Calibration Curve, take Qstd = 43 CFM

From the Regression Equation, the "Y" value according to

$$mw \times Qstd + bw = [\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$$

Therefore, Set Point; W = (mw x Qstd + bw)<sup>2</sup> x (760 / Pa) x (Ta / 298) = 4.36

Remarks: \_\_\_\_\_

Conducted by: Wk Tang Signature: [Signature]  
 Checked by: [Signature] Signature: [Signature]

Date: 10/6/08  
 Date: 10 June 2008

## TEST REPORT

**APPLICANT:** Cinotech Consultants Limited  
Room 1710, Technology Park,  
18 On Lai Street,  
Shatin, NT, Hong Kong

Test Report No.:	C/07/80502
Date of Issue:	2008-05-03
Date Received:	2008-05-02
Date Tested:	2008-05-02
Date Completed:	2008-05-03
Next Due Date:	2009-05-02

**ATTN:** Mr. Henry Leung

Page: 1 of 1

### Certificate of Calibration

**Item for calibration:**

Description : RS232 Integral Vane Digital Anemometer  
Manufacturer : AZ Instrument  
Model No. : 451104  
Serial No. : 9020746  
Equipment No. : A-03-01

**Test conditions:**

Room Temperature : 21 degree Celsius  
Relative Humidity : 65%  
Pressure : 101.3 kPa

**Methodology:**

The anemometer has been calibrated in accordance with the documented procedures and using standard(s) and instrument(s) which are recommended by the manufacturer, or equivalent.

**Results:**

	Reference Set Point	Instrument Readings
Measuring Air Velocity, m/s	2.00	2.00
Temperature, °C	21.0	21.0

*PREPARED AND CHECKED BY:*

For and On Behalf of **WELLAB Ltd.**



**PATRICK TSE**

Laboratory Manager



TISCH ENVIRONMENTAL, INC.  
 145 SOUTH MIAMI AVE.  
 VILLAGE OF CLEVELAND, OH 45002  
 513.467.9000  
 877.263.7610 TOLL FREE  
 513.467.9009 FAX  
 WWW.TISCH-ENV.COM

AIR POLLUTION MONITORING EQUIPMENT

ORIFICE TRANSFER STANDARD CERTIFICATION WORKSHEET TE-5025A

Date - Mar 10, 2008 Rootsmeter S/N 9833640 Ta (K) - 295  
 Operator Tisch Orifice I.D. - 0999 Pa (mm) - 746.76

PLATE OR Run #	VOLUME START (m3)	VOLUME STOP (m3)	DIFF VOLUME (m3)	DIFF TIME (min)	METER DIFF Hg (mm)	ORFICE DIFF H2O (in.)
1	NA	NA	1.00	1.3890	3.2	2.00
2	NA	NA	1.00	0.9850	6.3	4.00
3	NA	NA	1.00	0.8810	7.8	5.00
4	NA	NA	1.00	0.8410	8.6	5.50
5	NA	NA	1.00	0.6950	12.5	8.00

DATA TABULATION

Vstd	(x axis) Qstd	(y axis)	Va	(x axis) Qa	(y axis)
0.9917	0.7139	1.4113	0.9957	0.7168	0.8874
0.9876	1.0026	1.9959	0.9916	1.0067	1.2549
0.9854	1.1185	2.2315	0.9894	1.1231	1.4030
0.9844	1.1706	2.3405	0.9884	1.1753	1.4715
0.9792	1.4090	2.8227	0.9832	1.4147	1.7747
Qstd slope (m) = 2.03154			Qa slope (m) = 1.27212		
intercept (b) = -0.03970			intercept (b) = -0.02496		
coefficient (r) = 0.99999			coefficient (r) = 0.99999		

y axis = SQRT[H2O(Pa/760) (298/Ta)]

y axis = SQRT[H2O(Ta/Pa)]

CALCULATIONS

Vstd = Diff. Vol [(Pa-Diff. Hg) / 760] (298/Ta)  
 Qstd = Vstd/Time

Va = Diff Vol [(Pa-Diff Hg) / Pa]  
 Qa = Va/Time


For subsequent flow rate calculations:

Qstd = 1/m{ [SQRT(H2O(Pa/760) (298/Ta))] - b}  
 Qa = 1/m{ [SQRT H2O(Ta/Pa)] - b}



TISCH ENVIRONMENTAL, INC.  
 145 SOUTH MIAMI AVE.  
 VILLAGE OF CLEVELAND, OH 45002  
 513.467.9000  
 877.263.7610 TOLL FREE  
 513.467.9009 FAX  
 WWW.TISCH-ENV.COM

AIR POLLUTION MONITORING EQUIPMENT

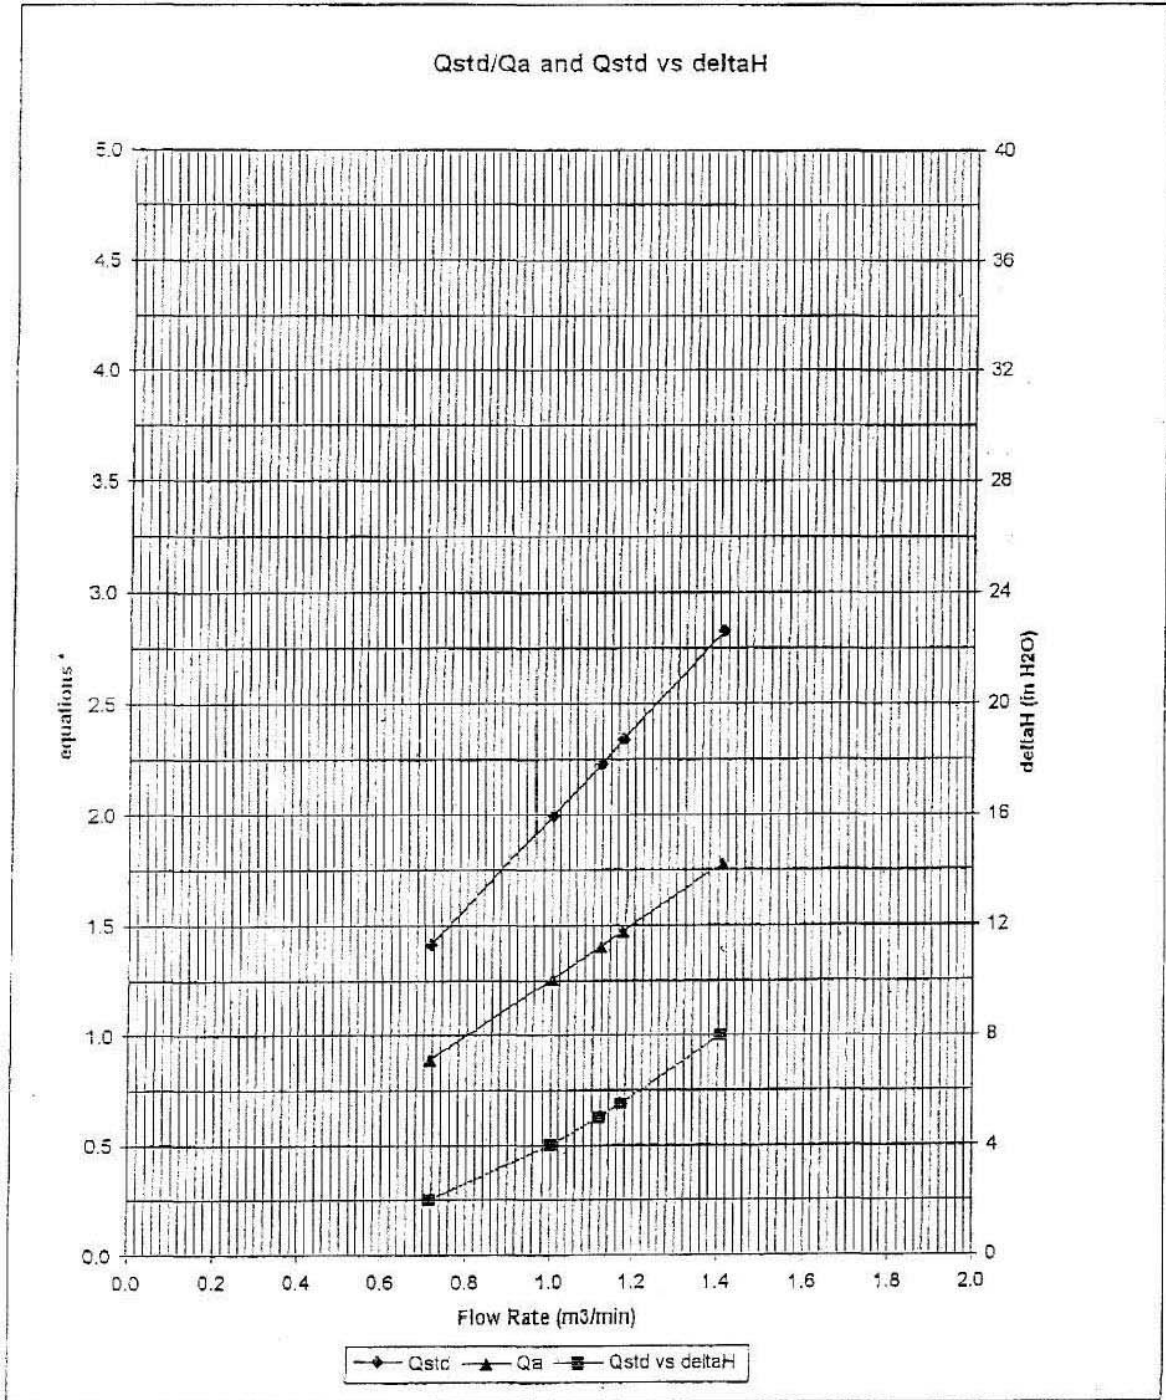

\* y-axis equations:

Qstd series: 
$$\sqrt{\Delta H \left( \frac{P_a}{P_{std}} \right) \left( \frac{T_{std}}{T_a} \right)}$$

Qa series: 
$$\sqrt{(\Delta H (T_a / P_a))}$$

**TEST REPORT**

**APPLICANT:** Cinotech Consultants Limited  
Room 1710, Technology Park,  
18 On Lai Street,  
Shatin, NT, Hong Kong

Test Report No.:	C/N/71213/1
Date of Issue:	2007-12-14
Date Received:	2007-12-13
Date Tested:	2007-12-14
Date Completed:	2007-12-14
Next Due Date:	2008-12-13

**ATTN:** Mr. Henry Leung

Page: 1 of 1

**Certificate of Calibration**

**Item for calibration:**

Description	: Integrating Sound Level Meter
Manufacturer	: Brüel & Kjær
Model No.	: B&K 2238
Serial No.	: 2337665
Microphone No.	: 2289749
Equipment No.	: N-01-01

**Test conditions:**

Room Temperature	: 20 degree Celsius
Relative Humidity	: 60%

**Test Specifications:**

Performance checking at 94 and 114 dB

**Methodology:**

In-house method, according to manufacturer instruction manual

**Results:**

Reference Set Point, dB	Instrument Readings, dB
94	94.0
114	114.0

*PREPARED AND CHECKED BY:*

For and On Behalf of **WELLAB Ltd.**



**PATRICK TSE**  
Senior Chemist



## TEST REPORT

**APPLICANT:** Cinotech Consultants Limited  
Room 1710, Technology Park,  
18 On Lai Street,  
Shatin, NT, Hong Kong

Test Report No.:	C/N/71116/1
Date of Issue:	2007-11-16
Date Received:	2007-11-15
Date Tested:	2007-11-15
Date Completed:	2007-11-16
Next Due Date:	2008-11-15

**ATTN:** Mr. Henry Leung

Page: 1 of 1

### Certificate of Calibration

**Item for calibration:**

Description	: Integrating Sound Level Meter
Manufacturer	: Brüel & Kjær
Model No.	: B&K 2238
Serial No.	: 2337666
Microphone No.	: 2289750
Equipment No.	: N-01-02

**Test conditions:**

Room Temperature	: 20 degree Celsius
Relative Humidity	: 59%

**Test Specifications:**

Performance checking at 94 and 114 dB

**Methodology:**

In-house method, according to manufacturer instruction manual

**Results:**

Reference Set Point, dB	Instrument Readings, dB
94	94.0
114	114.0

*PREPARED AND CHECKED BY:*

For and On Behalf of **WELLAB Ltd.**



**PATRICK TSE**  
Senior Chemist

## TEST REPORT

**APPLICANT:** Cinotech Consultants Limited  
1601-1610 Delta House,  
3 On Yiu Street,  
Shatin, N.T.

Test Report No.:	C/N/70903-1
Date of Issue:	2007-09-03
Date Received:	2007-09-01
Date Tested:	2007-09-03
Date Completed:	2007-09-03
Next Due Date:	2008-09-02

**ATTN:** Mr. Henry Leung

Page: 1 of 1

### Certificate of Calibration

**Item for calibration:**

Description	: Integrating Sound Level Meter
Manufacturer	: Brüel & Kjær
Model No.	: B&K 2238
Serial No.	: 2359311
Microphone No.	: 2346382
Equipment No.	: N-01-03

**Test conditions:**

Room Temperature	: 22 degree Celsius
Relative Humidity	: 62%

**Test Specifications:**

Performance checking at 94 and 114 dB

**Methodology:**

In-house method, according to manufacturer instruction manual

**Results:**

Reference Set Point, dB	Instrument Readings, dB
94	94.0
114	114.0

*PREPARED AND CHECKED BY:*

For and On Behalf of **WELLAB Ltd.**



**PATRICK TSE**  
*Senior Chemist*

## TEST REPORT

**APPLICANT:** Cinotech Consultants Limited  
1602-1610 Delta House,  
3 On Yiu Street,  
Shatin, N.T.

Test Report No.:	C/N/70903-2
Date of Issue:	2007-09-03
Date Received:	2007-09-01
Date Tested:	2007-09-03
Date Completed:	2007-09-03
Next Due Date:	2008-09-02

**ATTN:** Mr. Henry Leung

Page: 1 of 1

### Certificate of Calibration

**Item for calibration:**

Description	: Integrating Sound Level Meter
Manufacturer	: Brüel & Kjær
Model No.	: B&K 2238
Serial No.	: 2359303
Equipment No.	: N-01-04

**Test conditions:**

Room Temperature	: 22 degree Celsius
Relative Humidity	: 62%

**Test Specifications:**

Performance checking at 94 and 114 dB

**Methodology:**

In-house method, according to manufacturer instruction manual

**Results:**

Reference Set Point, dB	Instrument Readings, dB
94	94.0
114	114.0

*PREPARED AND CHECKED BY:*

For and On Behalf of **WELLAB Ltd.**



**PATRICK TSE**  
Senior Chemist

## TEST REPORT

**APPLICANT:** Cinotech Consultants Limited  
Room 1710, Technology Park,  
18 On Lai Street,  
Shatin, NT, Hong Kong

Test Report No.:	C/N/71015/1
Date of Issue:	2007-10-15
Date Received:	2007-10-13
Date Tested:	2007-10-13
Date Completed:	2007-10-15
Next Due Date:	2008-10-14

**ATTN:** Mr. Henry Leung

Page: 1 of 1

### Certificate of Calibration

**Item for calibration:**

Description	: Integrating Sound Level Meter
Manufacturer	: Brüel & Kjær
Model No.	: B&K 2238
Serial No.	: 2394976
Microphone No.	: 2407349
Equipment No.	: N-01-05

**Test conditions:**

Room Temperature	: 21 degree Celsius
Relative Humidity	: 60%

**Test Specifications:**

Performance checking at 94 and 114 dB

**Methodology:**

In-house method, according to manufacturer instruction manual

**Results:**

Reference Set Point, dB	Instrument Readings, dB
94	94.0
114	114.0

*PREPARED AND CHECKED BY:*

For and On Behalf of **WELLAB Ltd.**

  
**PATRICK TSE**  
Senior Chemist

## TEST REPORT

**APPLICANT:** Cinotech Consultants Limited  
Room 1710, Technology Park,  
18 On Lai Street,  
Shatin, NT, Hong Kong

Test Report No.:	C/N/71116/2
Date of Issue:	2007-11-16
Date Received:	2007-11-15
Date Tested:	2007-11-15
Date Completed:	2007-11-16
Next Due Date:	2008-11-15

**ATTN:** Mr. Henry Leung

Page: 1 of 1

### Item for calibration:

Description	: Acoustical Calibrator
Manufacturer	: Brüel & Kjær
Model No.	: 4231
Serial No.	: 2326353
Project No.	: C13
Equipment No.	: N-02-01

### Test conditions:

Room Temperature	: 20 degree Celsius
Relative Humidity	: 59%
Pressure	: 1015.2 hPa

### Methodology:

The sound calibrator has been calibrated in accordance with the documented procedures and using standard(s) and instrument(s) which are recommended by the manufacturer, or equivalent.

### Results:

Sound Pressure Level	Measured SPL	Tolerance
At 94 dB SPL	94.0	94.0 ± 0.1 dB

PREPARED AND CHECKED BY:

For and On Behalf of **WELLAB Ltd.**



**PATRICK TSE**  
Senior Chemist

## TEST REPORT

**APPLICANT:** Cinotech Consultants Limited  
Room 1710, Technology Park,  
18 On Lai Street,  
Shatin, NT, Hong Kong

Test Report No.:	C/06/80305
Date of Issue:	2008-03-05
Date Received:	2008-03-03
Date Tested:	2008-03-03
Date Completed:	2008-03-05
Next Due Date:	2009-03-04

**ATTN:** Mr. Henry Leung

Page: 1 of 1

### Item for calibration:

Description	: Acoustical Calibrator
Manufacturer	: Brüel & Kjær
Model No.	: 4231
Serial No.	: 2343007
Project No.	: C13
Equipment No.	: N-02-02

### Test conditions:

Room Temperature	: 20 degree Celsius
Relative Humidity	: 65%
Pressure	: 1020.1hPa

### Methodology:

The sound calibrator has been calibrated in accordance with the documented procedures and using standard(s) and instrument(s) which are recommended by the manufacturer, or equivalent.

### Results:

Sound Pressure Level	Measured SPL	Tolerance
At 94 dB SPL	94.0	94.0 ± 0.2 dB

PREPARED AND CHECKED BY:

For and On Behalf of **WELLAB Ltd.**



**PATRICK TSE**  
Laboratory Manager



## TEST REPORT

**APPLICANT:** **Cinotech Consultants Limited**  
**1602-1610 Delta House,**  
**3 On Yiu Street,**  
**Shatin, N.T.**

Test Report No.:	C/N/70903-3
Date of Issue:	2007-09-03
Date Received:	2007-09-01
Date Tested:	2007-09-03
Date Completed:	2007-09-03
Next Due Date:	2008-09-02

**ATTN:** **Mr. Henry Leung**

Page: 1 of 1

### Item for calibration:

Description	: Acoustical Calibrator
Manufacturer	: Brüel & Kjær
Model No.	: 4231
Serial No.	: 2412367
Equipment No.	: N-02-03

### Test conditions:

Room Temperature	: 22 degree Celsius
Relative Humidity	: 62%

### Methodology:

The Sound Level Calibrator has been calibrated in accordance with the documented procedures and using standard(s) and instrument(s) which are recommended by the manufacturer, or equivalent.

### Results:

Sound Pressure Level (1kHz)	Measured SPL	Tolerance
At 94 dB SPL	94.0	94.0 ± 0.1 dB
At 114 dB SPL	114.0	114.0 ± 0.1 dB

*PREPARED AND CHECKED BY:*

For and On Behalf of **WELLAB Ltd.**

  
**PATRICK TSE**  
Senior Chemist

## TEST REPORT

**APPLICANT:** Cinotech Consultants Limited  
Room 1710, Technology Park,  
18 On Lai Street,  
Shatin, NT, Hong Kong

Test Report No.:	C/W/80505-1
Date of Issue:	2008-05-06
Date Received:	2008-05-05
Date Tested:	2008-05-05
Date Completed:	2008-05-06
Next Due Date:	2008-08-05

**ATTN:** Mr. Henry Leung

Page: 1 of 2

### Certificate of Calibration

**Item for calibration:**

Description	: Sonde Environmental Monitoring System
Manufacturer	: YSI
Model No.	: 6820-C-M
Serial No.	: 02D0126AA
Equipment No.	: W.03.01
Project No.	: C013

**Test conditions:**

Room Temperature	: 21 degree Celsius
Relative Humidity	: 62%

**Test Specifications:**

Conductivity & Salinity Sensor, Model: 6560, S/N: 05A1209  
1. Conductivity performance check with Potassium Chloride standard solution  
2. Salinity performance check with Sodium Chloride standard solution  
Dissolved Oxygen Sensor, Model: 6562, S/N: 04A0145  
1. Performance check against Winkler titration  
Turbidity Sensor, Model: 6136, S/N: 05A1610AJ  
1. Calibration check with Formazin standard solution  
pH Meter, Model: 6561, S/N: 01J  
1. Calibration check with standard pH buffer  
Depth Meter  
1. Calibration check at 1m water level depth

**Methodologies:**

1. YSI 6-Series Sonde Environmental Monitoring System Instruction Manual
2. In-house method with reference to APHA and ISO standards

*PREPARED AND CHECKED BY:*

For and On Behalf of **WELLAB Ltd.**

  
**PATRICK TSE**  
Laboratory Manager



## TEST REPORT

Test Report No.:	C/W/80505-1
Date of Issue:	2008-05-06
Date Received:	2008-05-05
Date Tested:	2008-05-05
Date Completed:	2008-05-06
Next Due Date:	2008-08-05

Page: 2 of 2

### Results:

#### 1. Conductivity performance check

Specific Conductivity, $\mu\text{S}/\text{cm}$		Correction, $\mu\text{S}/\text{cm}$	Acceptable range
Salinity Meter (C1)	Theoretical Value (C2)	$D = C1 - C2$	
1421	1420	2	$1420 \pm 20$

#### 2. Salinity Performance check

Salinity, ppt		Correction, ppt	Acceptable range
Instrument Reading	Theoretical Value		
30.0	30.0	0.0	$30.0 \pm 3$

#### 3. Dissolved Oxygen check

Oxygen level in water at 20°C	Dissolved Oxygen, mg O <sub>2</sub> /L		Correction, mg O <sub>2</sub> /L	Acceptable range
	D.O. Meter	Winkler Titration		
Saturated	9.1	9.1	0.0	$\pm 0.2$
Half-saturated	5.6	5.6	0.0	$\pm 0.2$
Zero	0.0	0.0	0.0	$\pm 0.2$

#### 4. Turbidity check

Turbidity value in solution, NTU	Calibration Value, NTU	Correction, NTU	Acceptable range
0.00	0.00	0.00	$0.00 \pm 0.05$
100	100	0	$100 \pm 5$

#### 5. pH Meter check

Test Parameters	Performance characteristic	Acceptable range
Liquid junction error $\Delta\text{pH}_l$ , pH unit	0.01	Less than 0.05
Shift on stirring $\Delta\text{pH}_s$ , pH unit	0.01	Less than 0.02
Noise $\Delta\text{pH}_n$ , pH unit	0.00	Less than 0.02

#### 6. Depth Meter check

Instrument Reading, m	Calibration Value, m	Correction, m	Acceptable range
1.0	1.00	0.00	$1.00 \pm 0.05$

\*\*\*\*\*END OF REPORT\*\*\*\*\*

## TEST REPORT

**APPLICANT:** Cinotech Consultants Limited  
Room 1710, Technology Park,  
18 On Lai Street,  
Shatin, NT, Hong Kong

Test Report No.:	C/W/80505-2
Date of Issue:	2008-05-06
Date Received:	2008-05-05
Date Tested:	2008-05-05
Date Completed:	2008-05-06
Next Due Date:	2008-08-05

**ATTN:** Mr. Henry Leung

Page: 1 of 2

### Certificate of Calibration

**Item for calibration:**

Description	: Sonde Environmental Monitoring System
Manufacturer	: YSI
Model No.	: 6820-C-M
Serial No.	: 02D0293AA
Equipment No.	: W.03.02
Project No.	: C013

**Test conditions:**

Room Temperature	: 21 degree Celsius
Relative Humidity	: 62%

**Test Specifications:**

Conductivity & Salinity Sensor, Model: 6560, S/N: 02C0886  
1. Conductivity performance check with Potassium Chloride standard solution  
2. Salinity performance check with Sodium Chloride standard solution  
Dissolved Oxygen Sensor, Model: 6562, S/N: 0261137  
1. Performance check against Winkler titration  
Turbidity Sensor, Model: 6136, S/N: 05F2030AQ  
1. Calibration check with Formazin standard solution  
pH Meter, Model: 6561, S/N: 02A  
1. Calibration check with standard pH buffer  
Depth Meter  
1. Calibration check at 1m water level depth

**Methodologies:**

1. YSI 6-Series Sonde Environmental Monitoring System Instruction Manual
2. In-house method with reference to APHA and ISO standards

*PREPARED AND CHECKED BY:*  
For and On Behalf of **WELLAB Ltd.**



**PATRICK TSE**  
Laboratory Manager

## TEST REPORT

Test Report No.:	C/W/80505-2
Date of Issue:	2008-05-06
Date Received:	2008-05-05
Date Tested:	2008-05-05
Date Completed:	2008-05-06
Next Due Date:	2008-08-05
Page:	2 of 2

### Results:

#### 1. Conductivity performance check

Specific Conductivity, $\mu\text{S}/\text{cm}$		Correction, $\mu\text{S}/\text{cm}$	Acceptable range
Salinity Meter (C1)	Theoretical Value (C2)	$D = C1 - C2$	
1420	1420	0	$1420 \pm 20$

#### 2. Salinity Performance check

Salinity, ppt		Correction, ppt	Acceptable range
Instrument Reading	Theoretical Value		
30.1	30.0	0.1	$30.0 \pm 3$

#### 3. Dissolved Oxygen check

Oxygen level in water at 20°C	Dissolved Oxygen, mg O <sub>2</sub> /L		Correction, mg O <sub>2</sub> /L	Acceptable range
	D.O. Meter	Winkler Titration		
Saturated	9.0	9.0	0.0	$\pm 0.2$
Half-saturated	5.8	5.8	0.0	$\pm 0.2$
Zero	0.0	0.0	0.0	$\pm 0.2$

#### 4. Turbidity check

Turbidity value in solution, NTU	Calibration Value, NTU	Correction, NTU	Acceptable range
0.00	0.00	0.00	$0.00 \pm 0.05$
100	100	0	$100 \pm 5$

#### 5. pH Meter check

Test Parameters	Performance characteristic	Acceptable range
Liquid junction error $\Delta\text{pH}_l$ , pH unit	0.01	Less than 0.05
Shift on stirring $\Delta\text{pH}_s$ , pH unit	0.01	Less than 0.02
Noise $\Delta\text{pH}_n$ , pH unit	0.01	Less than 0.02

#### 6. Depth Meter check

Instrument Reading, m	Calibration Value, m	Correction, m	Acceptable range
1.0	1.00	0.00	$1.00 \pm 0.05$

\*\*\*\*\*END OF REPORT\*\*\*\*\*

---

---

**APPENDIX C  
ENVIRONMENTAL MONITORING  
SCHEDULES**

---

---

**Contract No. HY/2003/19 - Improvement to Tung chung Road between Lung Tseng Tau and Cheung Sha  
Air, Noise and Water Quality Monitoring Schedule for July 2008**

Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
<b>29-Jun</b>	30-Jun	<b>1-Jul</b>	2-Jul	3-Jul	4-Jul	5-Jul
	Water Quality 24 hr TSP		Water Quality Noise		Water Quality	24 hr TSP
<b>6-Jul</b>	7-Jul	8-Jul	9-Jul	10-Jul	11-Jul	12-Jul
	Water Quality		Water Quality Noise		Water Quality 24 hr TSP	
<b>13-Jul</b>	14-Jul	15-Jul	16-Jul	17-Jul	18-Jul	19-Jul
	Water Quality		Water Quality Noise	24 hr TSP	Water Quality	
<b>20-Jul</b>	21-Jul	22-Jul	23-Jul	24-Jul	25-Jul	26-Jul
	Water Quality		Water Quality Noise 24 hr TSP		Water Quality	
<b>27-Jul</b>	28-Jul	29-Jul	30-Jul	31-Jul	1-Aug	2-Aug
	Water Quality	24 hr TSP	Water Quality Noise		Water Quality	

The schedule may be changed due to unforeseen circumstances (adverse weather, etc)

**Contract No. HY/2003/19 - Improvement to Tung chung Road between Lung Tseng Tau and Cheung Sha  
Tentative Air, Noise and Water Quality Monitoring Schedule for August 2008**

Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
					1-Aug	2-Aug
					Water Quality	
<b>3-Aug</b>	4-Aug	5-Aug	6-Aug	7-Aug	8-Aug	9-Aug
	Water Quality 24 hr TSP			Water Quality Noise	Water Quality	24 hr TSP
<b>10-Aug</b>	11-Aug	12-Aug	13-Aug	14-Aug	15-Aug	16-Aug
	Water Quality		Water Quality Noise		Water Quality 24 hr TSP	
<b>17-Aug</b>	18-Aug	19-Aug	20-Aug	21-Aug	22-Aug	23-Aug
	Water Quality		Water Quality Noise	24 hr TSP	Water Quality	
<b>24-Aug</b>	25-Aug	26-Aug	27-Aug	28-Aug	29-Aug	30-Aug
	Water Quality		Water Quality Noise 24 hr TSP		Water Quality	

The schedule may be changed due to unforeseen circumstances (adverse weather, etc)

---

---

**APPENDIX D  
24-HOUR TSP MONITORING  
RESULTS ,GRAPHICAL  
PRESENTATION AND WIND DATA**

---

---

## Appendix D - 24-hour TSP Monitoring Results

### Location AM1 - YMCA of Hong Kong Christian College

Date	Filter Weight (g)		Flow Rate (m <sup>3</sup> /min.)		Elapse Time		Sampling Time(hrs.)	Conc. (µg/m <sup>3</sup> )	Weather Condition	Air Temp. (K)	Atmospheric Pressure(Pa)	Particulate weight(g)	Av. flow (m <sup>3</sup> /min)	Total vol. (m <sup>3</sup> )
	Initial	Final	Initial	Final	Initial	Final								
5-Jul-08	2.8551	2.9013	1.22	1.22	3821.7	3845.7	24.0	26.3	Sunshine	302.3	758.6	0.0462	1.22	1758.0
11-Jul-08	2.8739	2.9152	1.23	1.23	3845.7	3869.7	24.0	23.4	Sunshine	298.9	757.0	0.0413	1.23	1765.3
17-Jul-08	2.8502	2.8939	1.22	1.22	3869.7	3893.7	24.0	24.9	Sunshine	301.9	755.1	0.0437	1.22	1755.4
23-Jul-08	2.7968	2.8520	1.22	1.22	3893.7	3917.7	24.0	31.5	Sunshine	303.6	758.0	0.0552	1.22	1754.0
29-Jul-08	2.8727	2.9468	1.21	1.21	3917.7	3941.7	24.0	42.5	Sunshine	304.7	750.9	0.0741	1.21	1743.8
							Min	23.4						
							Max	42.5						
							Average	29.7						

### Location AM2 - House in Leyburn Villas




Date	Filter Weight (g)		Flow Rate (m <sup>3</sup> /min.)		Elapse Time		Sampling Time(hrs.)	Conc. (µg/m <sup>3</sup> )	Weather Condition	Air Temp. (K)	Atmospheric Pressure(Pa)	Particulate weight(g)	Av. flow (m <sup>3</sup> /min)	Total vol. (m <sup>3</sup> )
	Initial	Final	Initial	Final	Initial	Final								
5-Jul-08	2.8236	2.8606	1.20	1.22	8615.3	8639.3	24.0	21.1	Sunshine	302.3	758.6	0.0370	1.21	1755.0
11-Jul-08	2.7865	2.8336	1.22	1.22	8639.3	8663.3	24.0	26.7	Sunshine	298.9	757.0	0.0471	1.22	1762.3
17-Jul-08	2.8216	2.8570	1.22	1.22	8663.3	8687.3	24.0	20.2	Sunshine	301.9	755.1	0.0354	1.22	1752.4
23-Jul-08	2.8133	2.8472	1.22	1.22	8687.3	8711.3	24.0	19.4	Sunshine	303.6	758.0	0.0339	1.22	1751.0
29-Jul-08	2.8682	2.9236	1.21	1.21	8711.3	8735.3	24.0	31.8	Sunshine	304.7	750.9	0.0554	1.21	1740.8
							Min	19.4						
							Max	31.8						
							Average	23.8						

### Location AM4 - No.31 South Lantau Road

Date	Filter Weight (g)		Flow Rate (m <sup>3</sup> /min.)		Elapse Time		Sampling Time(hrs.)	Conc. (µg/m <sup>3</sup> )	Weather Condition	Air Temp. (K)	Atmospheric Pressure(Pa)	Particulate weight(g)	Av. flow (m <sup>3</sup> /min)	Total vol. (m <sup>3</sup> )
	Initial	Final	Initial	Final	Initial	Final								
5-Jul-08	2.8293	2.8684	1.22	1.22	8470.5	8494.5	24.0	22.2	Sunshine	302.3	758.6	0.0391	1.22	1758.9
11-Jul-08	2.8527	2.9026	1.23	1.23	8494.5	8518.5	24.0	28.3	Sunshine	298.9	757.0	0.0499	1.23	1766.1
17-Jul-08	2.8516	2.8881	1.22	1.22	8518.5	8542.5	24.0	20.8	Sunshine	301.9	755.1	0.0365	1.22	1756.4
23-Jul-08	2.8400	2.8835	1.22	1.22	8542.5	8566.5	24.0	24.8	Sunshine	303.6	758.0	0.0435	1.22	1755.0
29-Jul-08	2.8743	2.9281	1.21	1.21	8566.5	8590.5	24.0	49.2	Sunshine	304.7	750.9	0.0538	1.21	1745.1
							Min	20.8						
							Max	49.2						
							Average	29.1						



## 24-hour TSP Levels

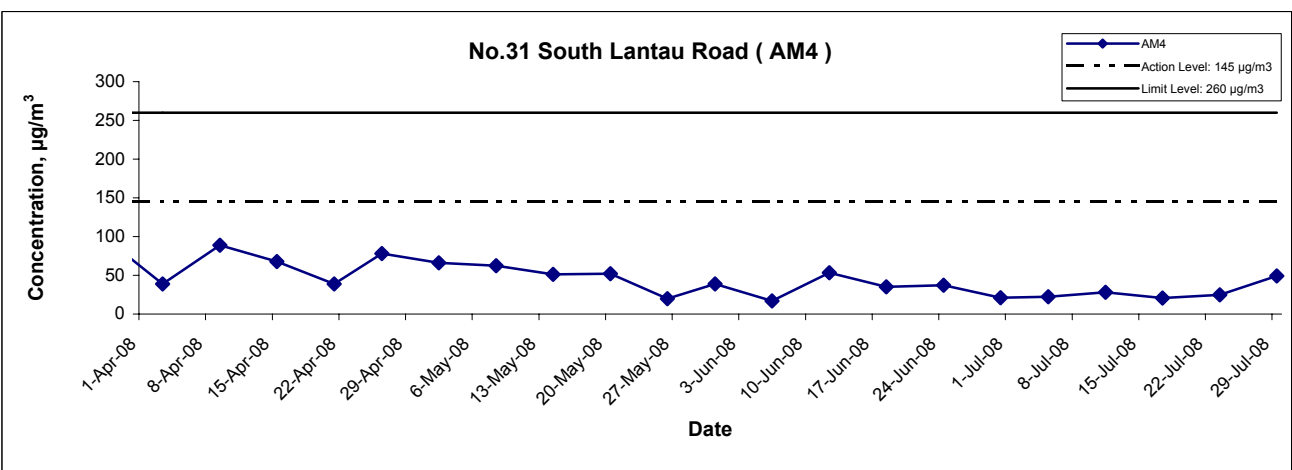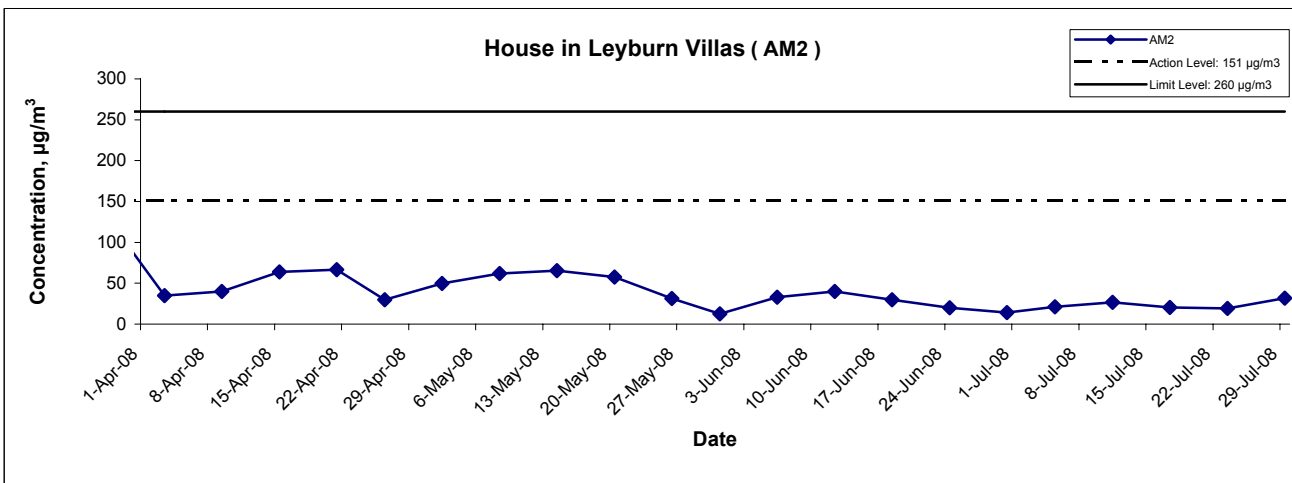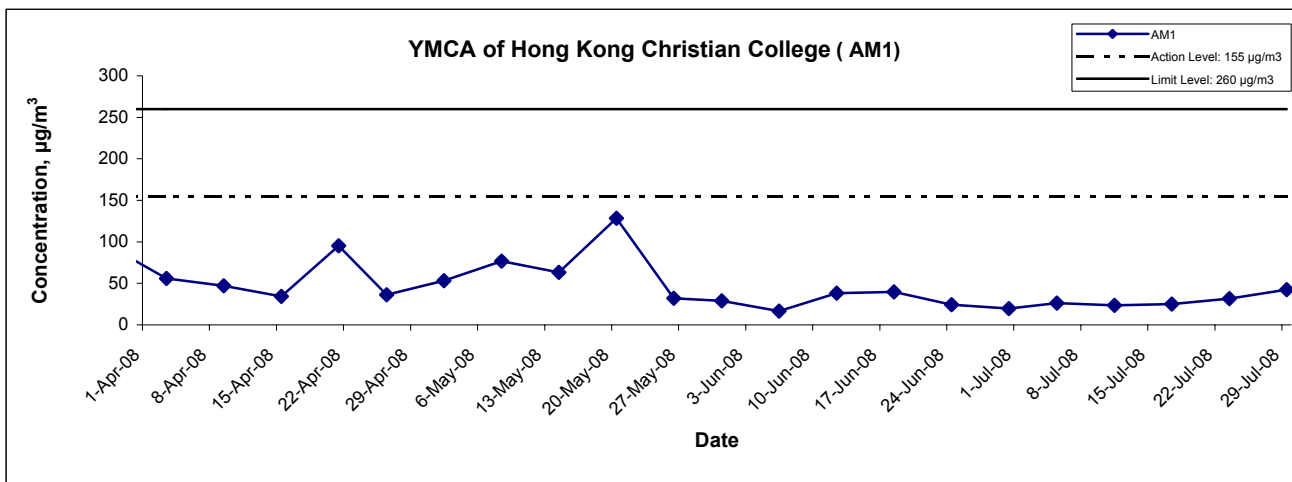

Title  
 Contract No. HY/2003/19  
 Improvement to Tung Chung Road  
 between Lung Tseng Tau and Cheung Sha  
 Graphical Presentation of 24-hour TSP Monitoring Results


Scale  
 N.T.S  
 Date  
 Jul 08

Project  
 No. MA6030  
 Appendix  
 D



### Wind Data (HK International Airport)

(於香港時間 2008 年07月05日23時50分更新) (Updated at 23:50H on 5 Jul 2008)

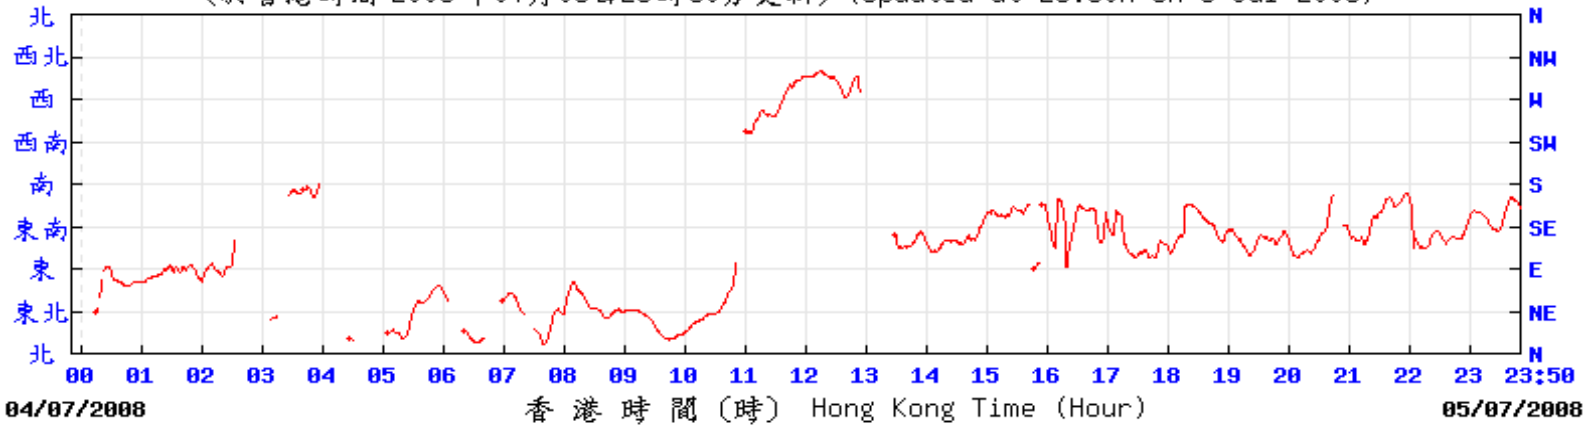

04/07/2008


香港時間 (時) Hong Kong Time (Hour)

05/07/2008

r2c

© 香港天文台 Hong Kong Observatory

(於香港時間 2008 年07月11日23時50分更新) (Updated at 23:50H on 11 Jul 2008)

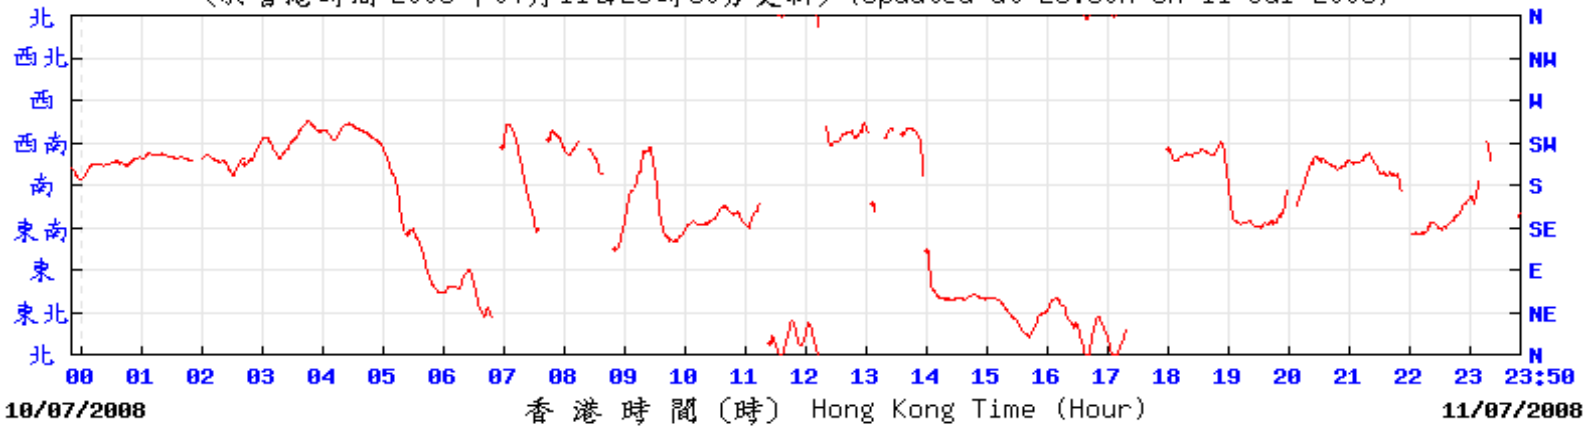


10/07/2008

香港時間 (時) Hong Kong Time (Hour)

11/07/2008


r2c

© 香港天文台 Hong Kong Observatory

Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha  Wind Data Extracted from the Hong Kong Observatory (HK International Airport)	Scale N.T.S	Project No. MA6030	
	Date Jul 08	Appendix D	

### Wind Data (HK International Airport)


(於香港時間 2008 年07月17日23時50分更新) (Updated at 23:50H on 17 Jul 2008)

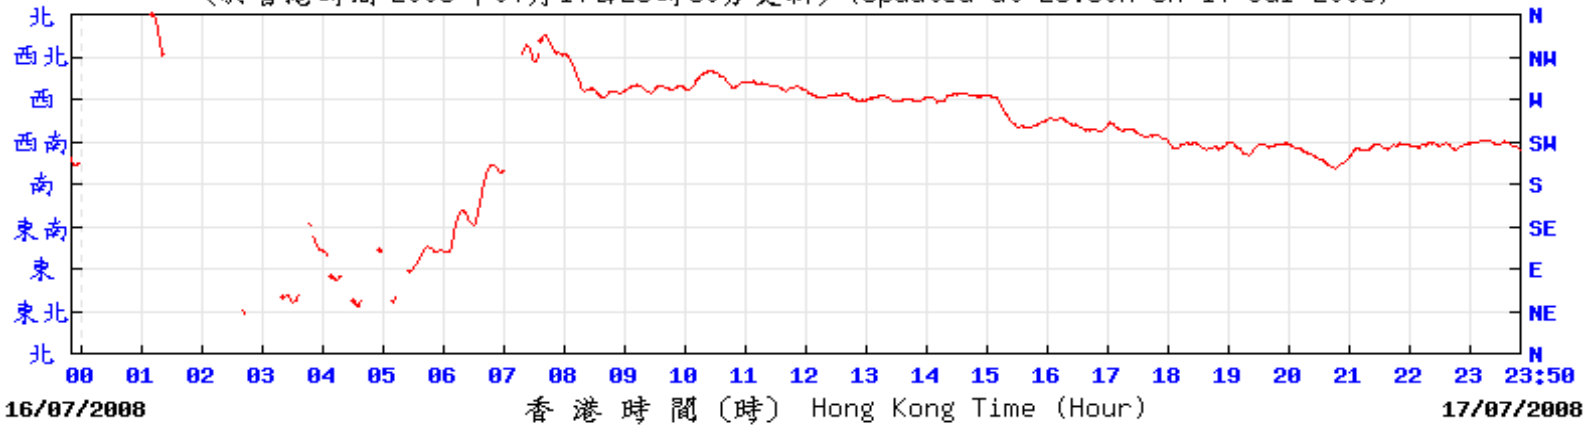

r2c

© 香港天文台 Hong Kong Observatory

(於香港時間 2008 年07月23日23時50分更新) (Updated at 23:50H on 23 Jul 2008)

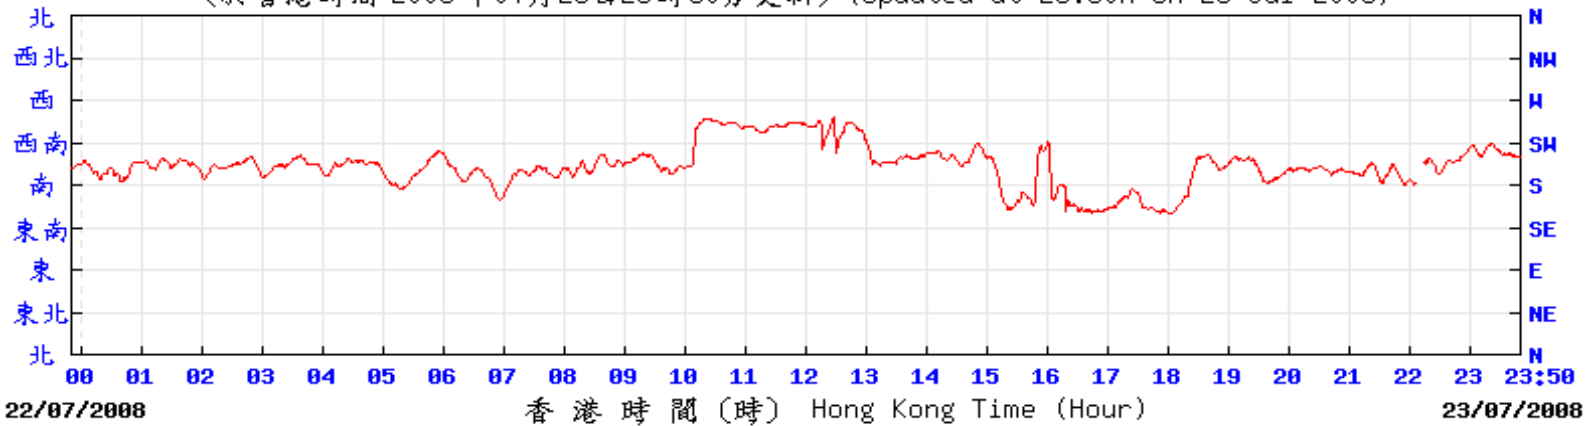

r2c

© 香港天文台 Hong Kong Observatory

Title

Contract No. HY/2003/19  
Improvement to Tung Chung Road  
between Lung Tseng Tau and Cheung Sha

Scale

N.T.S

Project

No. MA6030

Date

Jul 08

Appendix


D

Wind Data Extracted from the Hong Kong Observatory (HK International Airport)

CINOTECH

### Wind Data (HK International Airport)

(於香港時間 2008 年07月29日23時50分更新) (Updated at 23:50H on 29 Jul 2008)

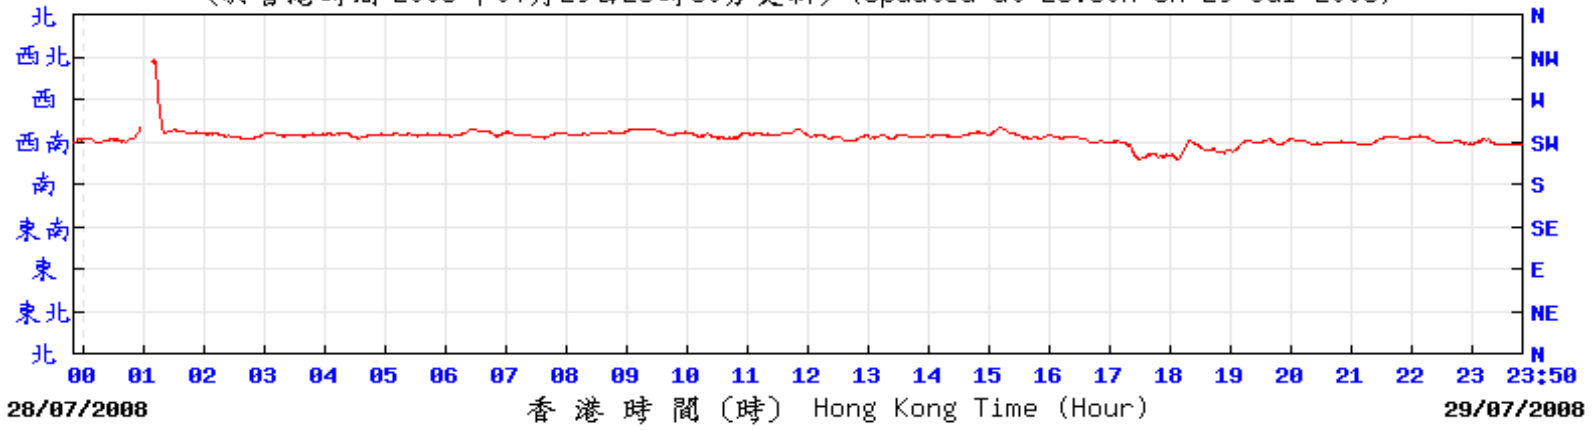


r2c

© 香港天文台 Hong Kong Observatory

Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha  Wind Data Extracted from the Hong Kong Observatory (HK International Airport)	Scale N.T.S	Project No. MA6030	<b>CINOTECH</b>
	Date Jul 08	Appendix D	

### Wind Data (Cheung Chau)


(於香港時間 2008 年 07 月 05 日 23 時 50 分更新) (Updated at 23:50H on 5 Jul 2008)

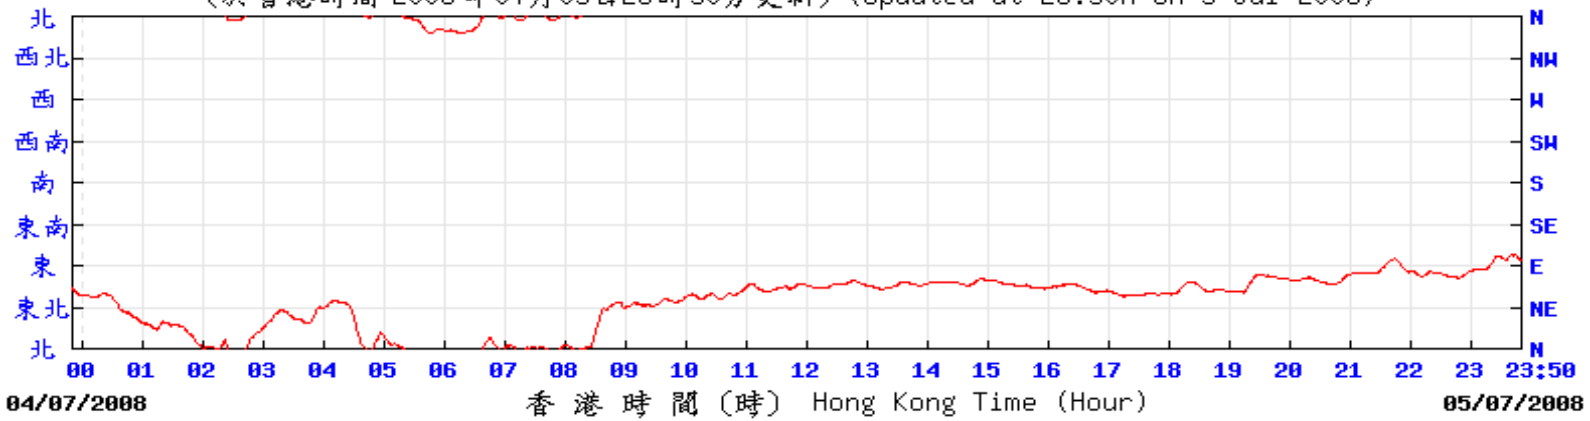

cch

© 香港天文台 Hong Kong Observatory

(於香港時間 2008 年 07 月 11 日 23 時 50 分更新) (Updated at 23:50H on 11 Jul 2008)

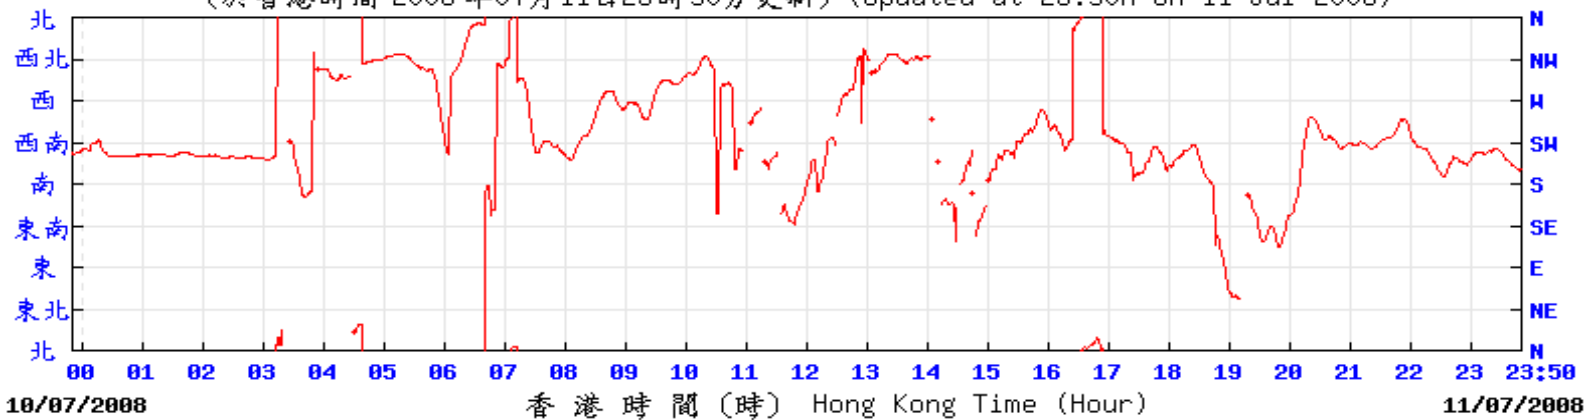


cch

© 香港天文台 Hong Kong Observatory

Title	Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha	Scale N.T.S	Project No. MA6030	CINOTECH
	Wind Data Extracted from the Hong Kong Observatory (Cheung Chau)	Date Jul 08	Appendix D	

### Wind Data (Cheung Chau)


(於香港時間 2008 年 07 月 17 日 23 時 50 分更新) (Updated at 23:50H on 17 Jul 2008)

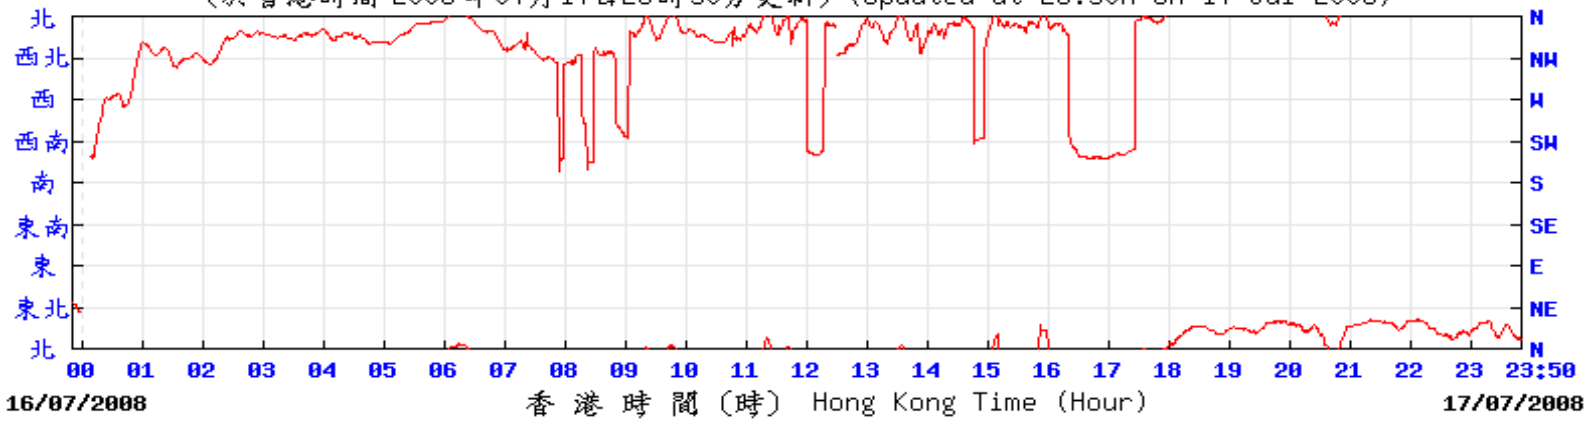

cch

© 香港天文台 Hong Kong Observatory

(於香港時間 2008 年 07 月 23 日 23 時 50 分更新) (Updated at 23:50H on 23 Jul 2008)

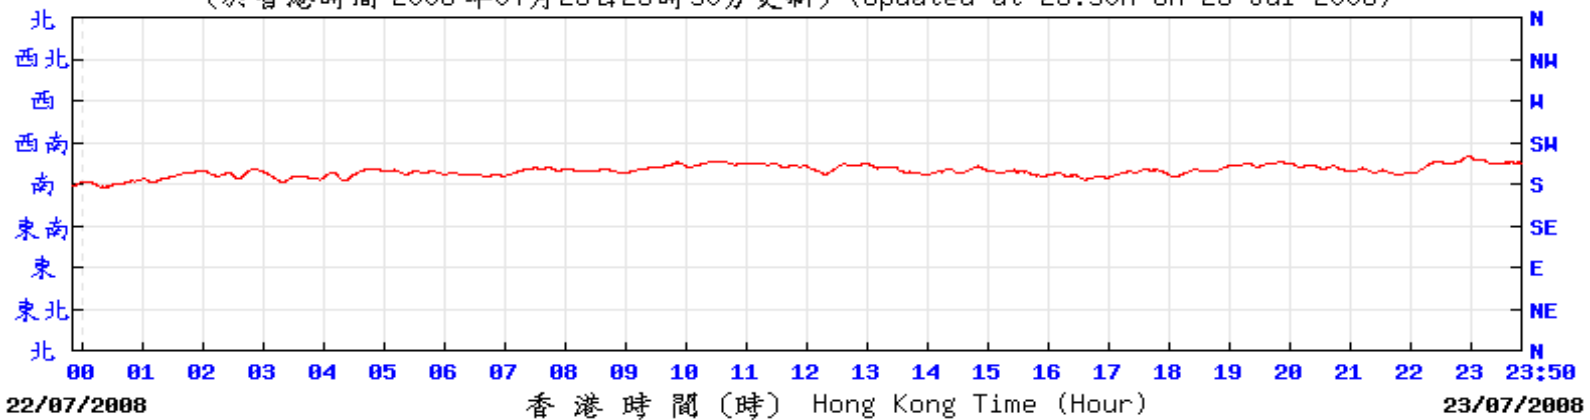

cch

© 香港天文台 Hong Kong Observatory

Title

Contract No. HY/2003/19  
Improvement to Tung Chung Road  
between Lung Tseng Tau and Cheung Sha

Scale

N.T.S

Project

No. MA6030

Date

Jul 08

Appendix


D

Wind Data Extracted from the Hong Kong Observatory (Cheung Chau)

CINOTECH

### Wind Data (Cheung Chau)

(於香港時間 2008 年 07 月 29 日 23 時 50 分更新) (Updated at 23:50H on 29 Jul 2008)

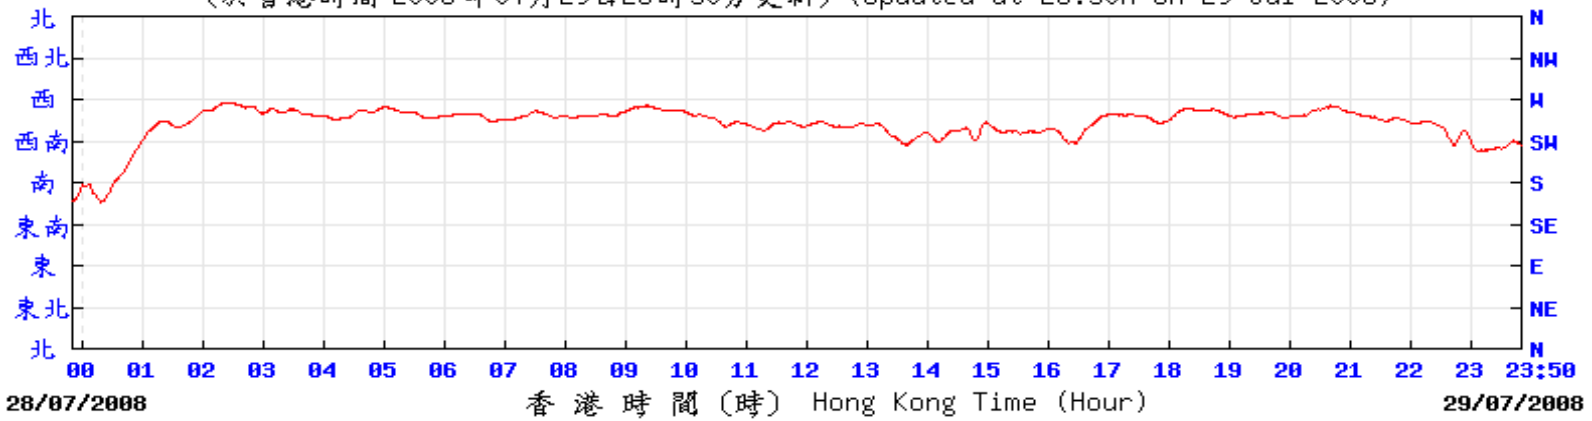

28/07/2008

香港時間 (時) Hong Kong Time (Hour)

29/07/2008

cch

© 香港天文台 Hong Kong Observatory

Title	Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha	Scale	Project	CINOTECH
		Date	Appendix	
	Wind Data Extracted from the Hong Kong Observatory (Cheung Chau)	N.T.S	No. MA6030	
		Jul 08	D	

---

---

**APPENDIX E  
NOISE MONITORING RESULTS AND  
GRAPHICAL PRESENTATION**

---

---



## Appendix E - Noise Monitoring Results

Location NM1 - No. 28 Lung Tseng Tau					
Date	Time	Weather	dB (A) (30-min)		
			L <sub>eq</sub>	L <sub>10</sub>	L <sub>90</sub>
2-Jul-08	09:40	Sunny	62.9	66.0	60.5
9-Jul-08	09:40	Fine	63.1	66.5	60.5
16-Jul-08	09:40	Cloudy	63.6	66.0	61.0
23-Jul-08	09:40	Sunny	65.3	67.0	63.5
30-Jul-08	09:40	Fine	65.7	67.0	62.0
		Average	64.0	66.4	61.0
		Minimum	62.9	66.0	60.5
		Maximum	65.7	67.0	63.5

Location NM2 - YMCA of HK Christian College					
Date	Time	Weather	dB (A) (30-min)		
			L <sub>eq</sub>	L <sub>10</sub>	L <sub>90</sub>
2-Jul-08	09:00	Sunny	52.6	55.0	51.0
9-Jul-08	09:00	Fine	52.5	55.0	51.0
16-Jul-08	09:00	Cloudy	51.9	54.5	49.5
23-Jul-08	09:00	Sunny	54.1	56.5	53.0
30-Jul-08	09:00	Fine	54.6	56.5	52.5
		Average	53.0	55.3	51.1
		Minimum	51.9	54.5	49.5
		Maximum	54.6	56.5	53.0

Location NM3 - No. 37 Shek Lau Po					
Date	Time	Weather	dB (A) (30-min)		
			L <sub>eq</sub>	L <sub>10</sub>	L <sub>90</sub>
2-Jul-08	10:20	Sunny	39.9	41.0	38.5
9-Jul-08	10:20	Fine	40.3	41.5	39.5
16-Jul-08	10:20	Cloudy	40.1	41.5	39.0
23-Jul-08	10:20	Sunny	40.6	42.0	38.5
30-Jul-08	10:20	Fine	40.2	41.5	38.5
		Average	40.1	41.4	38.9
		Minimum	39.9	41.0	38.5
		Maximum	40.6	42.0	39.5

Location NM4 - No.1 Shek Mun Kap					
Date	Time	Weather	dB (A) (30-min)		
			L <sub>eq</sub>	L <sub>10</sub>	L <sub>90</sub>
2-Jul-08	11:00	Sunny	52.1	53.5	50.5
9-Jul-08	11:20	Fine	51.7	53.0	48.5
16-Jul-08	11:00	Cloudy	50.7	52.5	48.0
23-Jul-08	11:00	Sunny	52.1	53.5	49.5
30-Jul-08	11:00	Fine	51.7	52.5	49.0
		Average	51.6	52.9	49.1
		Minimum	50.7	52.5	48.0
		Maximum	52.1	53.5	50.5




## Appendix E - Noise Monitoring Results

Location NM5 - Tung Chung Au Country Parks Management Centre					
Date	Time	Weather	dB (A) (30-min)		
			L <sub>eq</sub>	L <sub>10</sub>	L <sub>90</sub>
2-Jul-08	13:00	Sunny	51.2	52.5	49.5
9-Jul-08	13:00	Fine	51.2	52.5	48.5
16-Jul-08	13:00	Cloudy	48.2	50.5	47.0
23-Jul-08	13:00	Sunny	51.3	52.5	48.0
30-Jul-08	13:00	Fine	51.2	52.5	48.5
		Average	50.6	52.1	48.5
		Minimum	48.2	50.5	47.0
		Maximum	51.3	52.5	49.5

Location NM6 - D75 Leyburn Villa					
Date	Time	Weather	dB (A) (30-min)		
			L <sub>eq</sub>	L <sub>10</sub>	L <sub>90</sub>
2-Jul-08	13:45	Sunny	40.2	41.5	39.0
9-Jul-08	13:45	Fine	40.0	41.5	39.0
16-Jul-08	15:45	Cloudy	40.3	42.0	38.5
23-Jul-08	13:45	Sunny	40.1	42.0	38.5
30-Jul-08	13:45	Fine	40.4	41.0	39.5
		Average	40.2	41.5	39.0
		Minimum	40.0	41.0	38.5
		Maximum	40.4	42.0	39.5




Location NM8 - No. 31 South Lantau Road					
Date	Time	Weather	dB (A) (30-min)		
			L <sub>eq</sub>	L <sub>10</sub>	L <sub>90</sub>
2-Jul-08	14:25	Sunny	61.1	64.0	59.0
9-Jul-08	14:25	Fine	61.2	63.0	58.5
16-Jul-08	14:25	Cloudy	61.2	63.5	58.5
23-Jul-08	14:25	Sunny	62.3	64.5	60.0
30-Jul-08	14:25	Fine	62.3	64.5	59.5
		Average	61.5	63.8	58.9
		Minimum	61.1	63.0	58.5
		Maximum	62.3	64.5	60.0

## Noise Levels

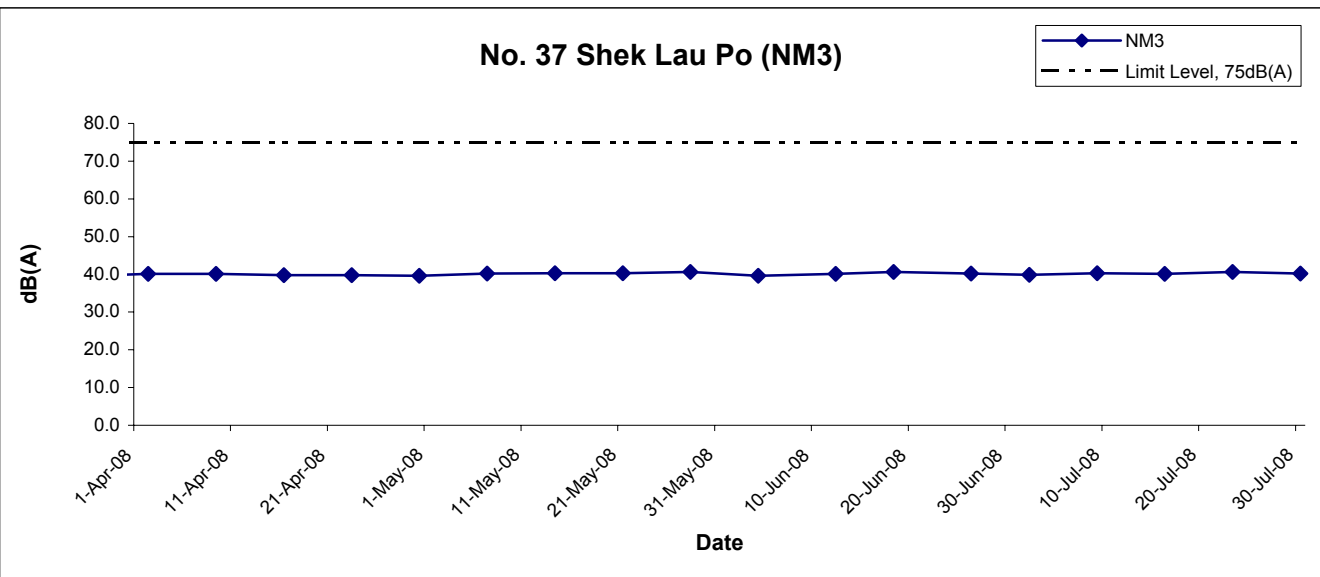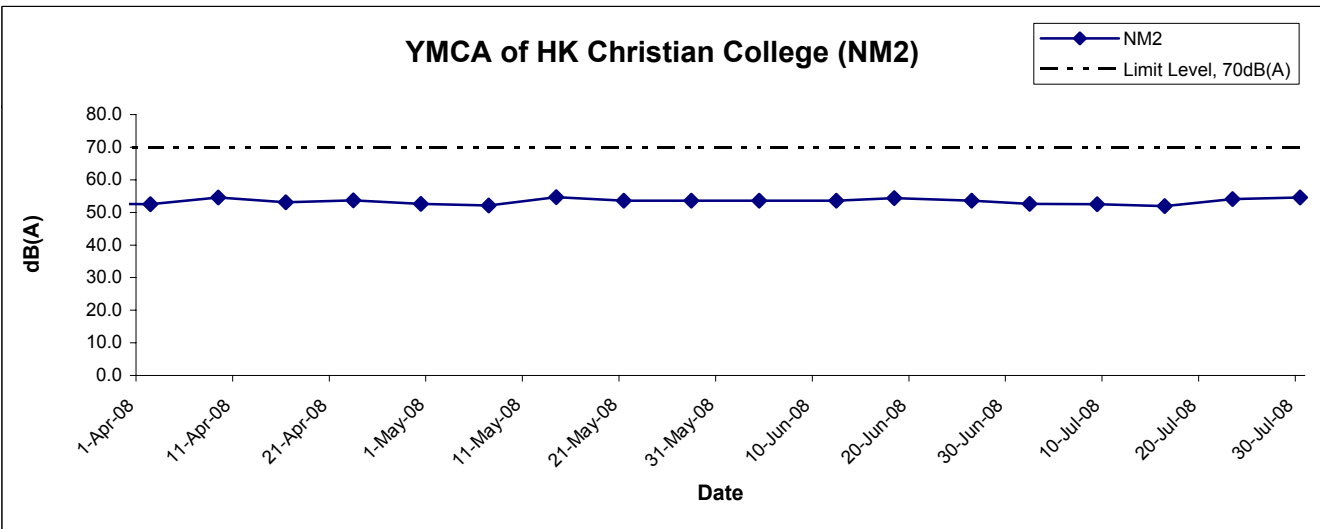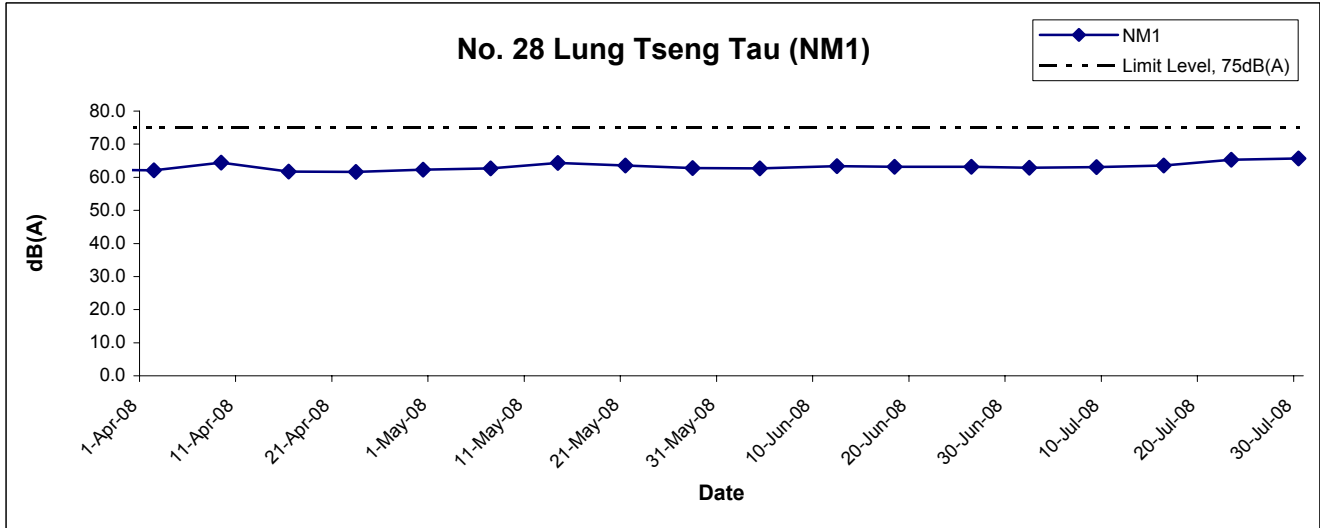


Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Construction Noise Monitoring Results	Scale N.T.S	Project No. MA6030	
	Date Jul 08	Appendix E	

## Noise Levels

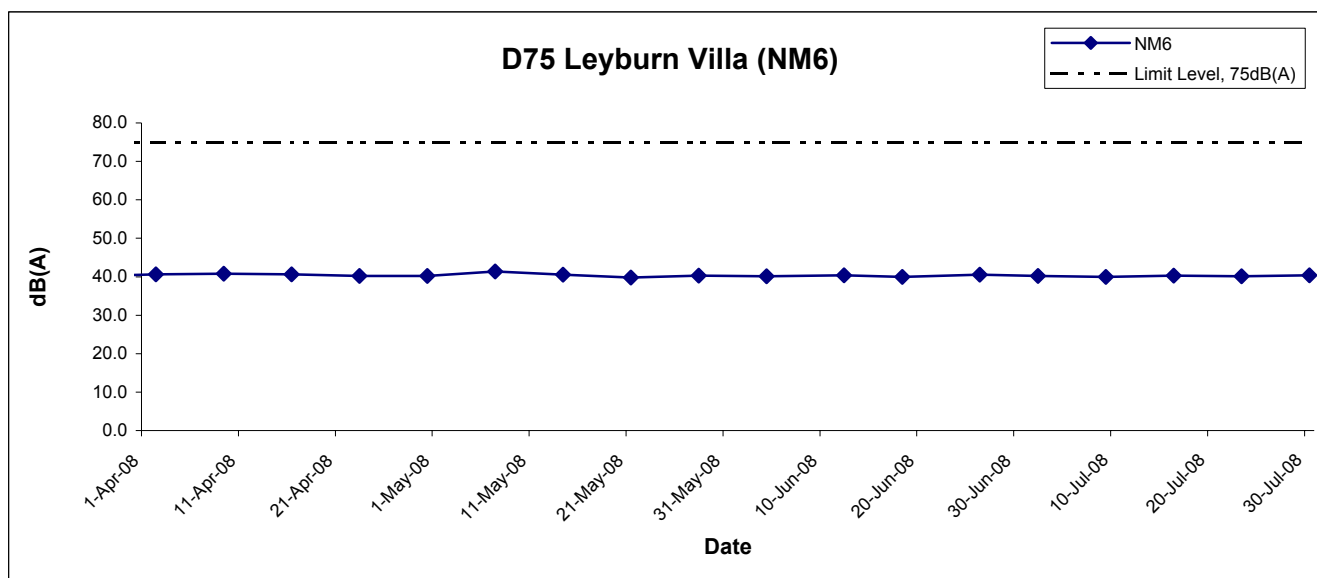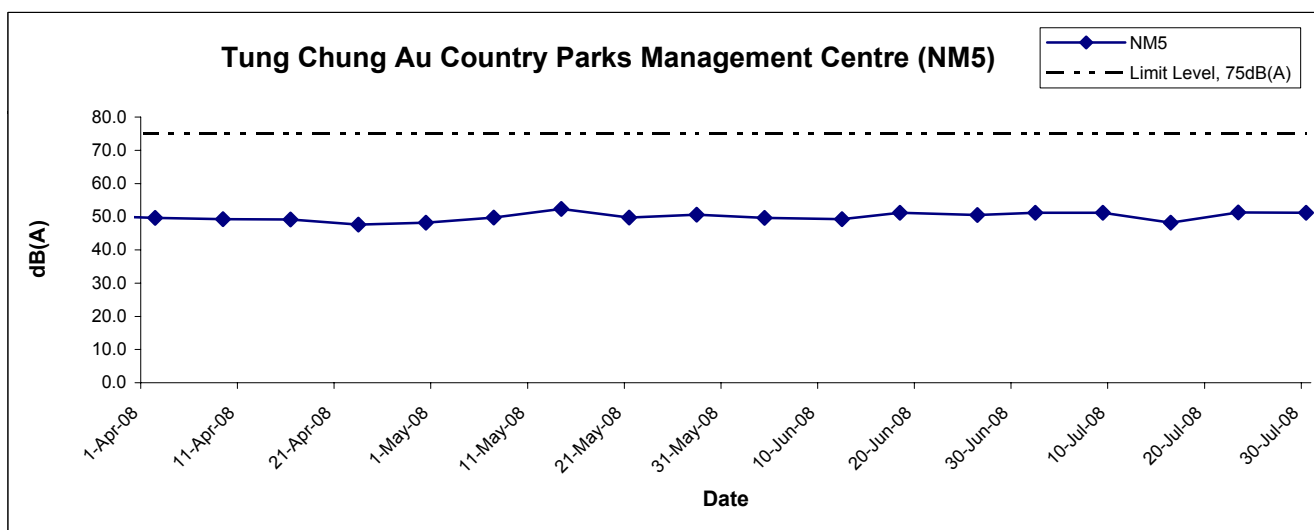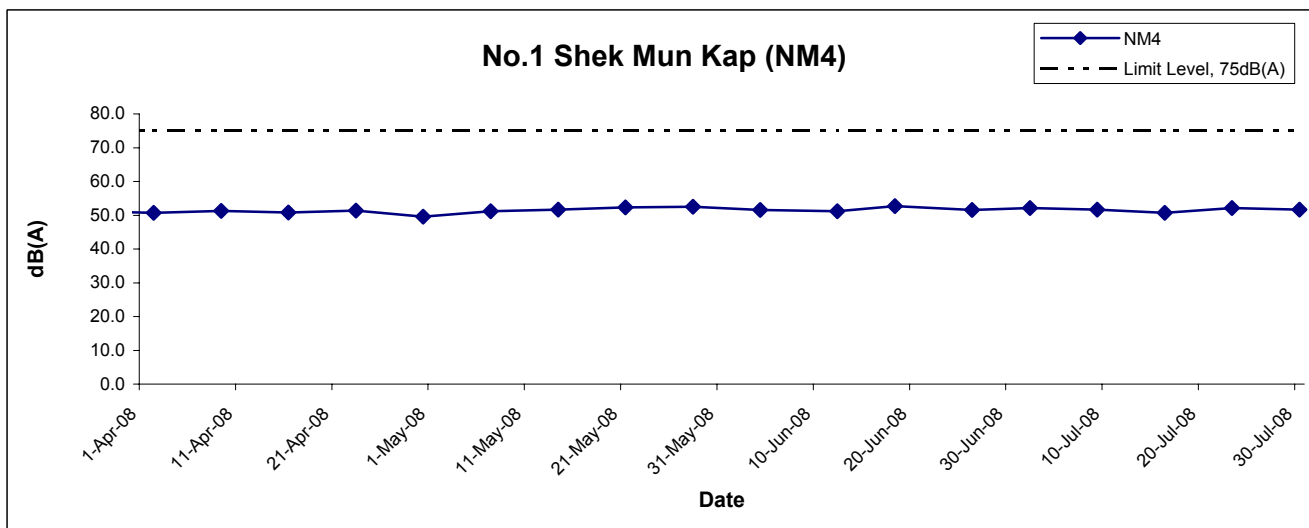

Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Construction Noise Monitoring Results	Scale N.T.S	Project No. MA6030	
	Date Jul 08	Appendix E	

## Noise Levels

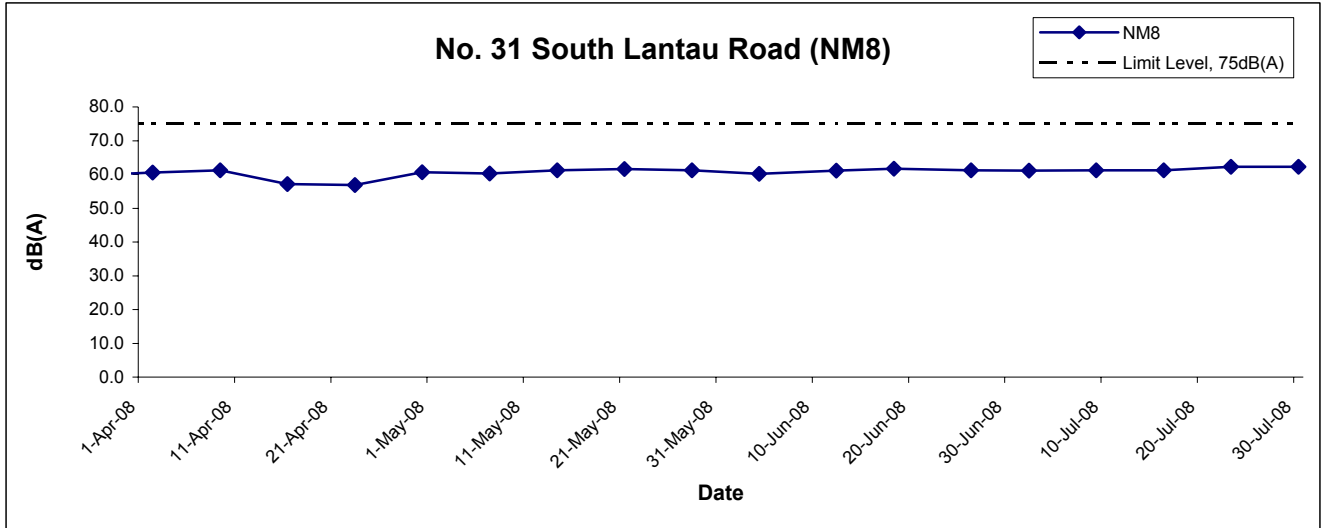

Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Construction Noise Monitoring Results	Scale N.T.S	Project No. MA6030	
	Date Jul 08	Appendix E	

---

---

**APPENDIX F  
WATER QUALITY MONITORING  
RESULTS AND GRAPHICAL  
PRESENTATION**

---

---

## Water Quality Monitoring Results at 15\_I

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
2-Jul-08	Sunny	Calm	11:24	Middle	0.09	22.8	22.9	7.4	7.4	0.02	0.02	90.9	90.8	8.1	8.1	1.9	1.9	<2.5	<2.5
						22.9		7.4		0.02		90.7		8.1		1.9			
4-Jul-08	Sunny	Calm	13:57	Middle	0.09	22.9	22.9	7.4	7.4	0.02	0.02	91.1	91	8.1	8.1	1.8	1.8	<2.5	<2.5
						22.9		7.4		0.02		90.9		8.1		1.8			
7-Jul-08	Sunny	Calm	11:24	Middle	0.09	22.8	22.8	7.3	7.3	0.02	0.02	90.2	90.1	7.9	7.9	1.7	1.7	<2.5	<2.5
						22.8		7.3		0.02		90.0		7.9		1.7			
9-Jul-08	Cloudy	Calm	11:46	Middle	0.09	22.9	22.9	7.4	7.4	0.02	0.02	90.8	90.7	8.0	8	1.8	1.8	<2.5	<2.5
						22.9		7.4		0.02		90.6		8.0		1.8			
11-Jul-08	Sunny	Calm	12:02	Middle	0.09	22.9	22.9	7.5	7.5	0.02	0.02	91.3	91.2	8.0	8	2.0	2	<2.5	<2.5
						22.9		7.5		0.02		91.1		8.0		2.0			
14-Jul-08	Sunny	Calm	11:54	Middle	0.09	22.8	22.8	7.5	7.5	0.02	0.02	92.2	92.1	8.2	8.2	2.2	2.2	<2.5	<2.5
						22.8		7.5		0.02		92.0		8.2		2.2			
16-Jul-08	Sunny	Calm	11:45	Middle	0.09	22.7	22.7	7.4	7.4	0.02	0.02	91.9	91.8	7.6	7.6	1.9	1.9	<2.5	<2.5
						22.7		7.4		0.02		91.7		7.6		1.9			
18-Jul-08	Sunny	Calm	14:08	Middle	0.09	22.8	22.8	7.4	7.4	0.02	0.02	91.0	90.9	7.2	7.2	1.7	1.7	<2.5	<2.5
						22.8		7.4		0.02		90.8		7.2		1.7			
21-Jul-08	Sunny	Calm	14:39	Middle	0.09	22.8	22.9	7.4	7.4	0.02	0.02	91.3	91.2	7.3	7.3	1.9	1.9	<2.5	<2.5
						22.9		7.4		0.02		91.1		7.3		1.9			
23-Jul-08	Sunny	Calm	14:22	Middle	0.09	22.9	22.9	7.4	7.4	0.02	0.02	90.4	90.3	7.1	7.1	1.8	1.8	<2.5	<2.5
						22.9		7.3		0.02		90.2		7.1		1.8			
25-Jul-08	Sunny	Calm	14:12	Middle	0.09	22.9	22.9	7.4	7.4	0.02	0.02	89.8	89.7	6.9	6.9	1.9	1.9	<2.5	<2.5
						22.9		7.4		0.02		89.6		6.9		1.9			
28-Jul-08	Sunny	Calm	12:52	Middle	0.09	22.8	22.8	7.3	7.3	0.02	0.02	88.1	88	6.5	6.5	1.6	1.6	<2.5	<2.5
						22.8		7.3		0.02		87.9		6.5		1.6			
30-Jul-08	Sunny	Calm	12:07	Middle	0.09	22.7	22.7	7.2	7.2	0.02	0.02	87.7	87.6	6.4	6.4	1.8	1.8	<2.5	<2.5
						22.7		7.2		0.02		87.5		6.4		1.8			

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: \* Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher

## Water Quality Monitoring Results at 15\_R

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
2-Jul-08	Sunny	Calm	11:17	Middle	0.08	22.8	22.8	7.4	7.4	0.02	0.02	91.4	91.3	8.1	8.1	2.1	2.1	<2.5	<2.5
						22.8		7.4		0.02		91.2		8.1		2.0		<2.5	
4-Jul-08	Sunny	Calm	13:51	Middle	0.08	22.8	22.9	7.3	7.3	0.02	0.02	91.6	91.5	8.1	8.1	2.0	2	<2.5	<2.5
						22.9		7.3		0.02		91.4		8.1		1.9		<2.5	
7-Jul-08	Sunny	Calm	11:17	Middle	0.08	22.8	22.8	7.3	7.3	0.02	0.02	90.7	90.6	7.9	7.9	1.9	1.9	<2.5	<2.5
						22.8		7.3		0.02		90.5		7.9		1.8		<2.5	
9-Jul-08	Cloudy	Calm	11:39	Middle	0.08	22.9	22.9	7.3	7.3	0.02	0.02	91.3	91.2	8.1	8.1	2.0	2	<2.5	<2.5
						22.9		7.3		0.02		91.1		8.0		1.9		<2.5	
11-Jul-08	Sunny	Calm	11:55	Middle	0.08	22.8	22.8	7.4	7.4	0.02	0.02	91.8	91.7	8.1	8.1	2.2	2.2	<2.5	<2.5
						22.8		7.4		0.02		91.6		8.1		2.1		<2.5	
14-Jul-08	Sunny	Calm	11:47	Middle	0.08	22.7	22.8	7.5	7.5	0.02	0.02	92.7	92.6	8.3	8.3	2.4	2.4	<2.5	<2.5
						22.8		7.5		0.02		92.5		8.3		2.3		<2.5	
16-Jul-08	Sunny	Calm	11:39	Middle	0.08	22.7	22.7	7.4	7.4	0.02	0.02	92.4	92.3	7.6	7.6	2.1	2.1	<2.5	<2.5
						22.7		7.4		0.02		92.2		7.6		2.0		<2.5	
18-Jul-08	Sunny	Calm	14:01	Middle	0.08	22.7	22.8	7.3	7.3	0.02	0.02	91.5	91.4	7.3	7.3	1.9	1.9	<2.5	<2.5
						22.8		7.3		0.02		91.3		7.2		1.8		<2.5	
21-Jul-08	Sunny	Calm	14:32	Middle	0.08	22.8	22.8	7.3	7.4	0.02	0.02	91.8	91.7	7.4	7.4	2.1	2.1	<2.5	<2.5
						22.8		7.4		0.02		91.6		7.4		2.0		<2.5	
23-Jul-08	Sunny	Calm	14:15	Middle	0.08	22.9	22.9	7.3	7.3	0.02	0.02	90.9	90.8	7.1	7.1	2.0	2	<2.5	<2.5
						22.9		7.3		0.02		90.7		7.1		1.9		<2.5	
25-Jul-08	Sunny	Calm	14:05	Middle	0.08	22.9	22.9	7.3	7.3	0.02	0.02	90.3	90.2	7.0	7	2.1	2.1	<2.5	<2.5
						22.9		7.3		0.02		90.1		7.0		2.0		<2.5	
28-Jul-08	Sunny	Calm	12:46	Middle	0.08	22.7	22.7	7.2	7.2	0.02	0.02	88.6	88.5	6.6	6.6	1.8	1.8	<2.5	<2.5
						22.7		7.2		0.02		88.4		6.6		1.7		<2.5	
30-Jul-08	Sunny	Calm	12:00	Middle	0.08	22.6	22.7	7.2	7.2	0.02	0.02	88.2	88.1	6.5	6.5	2.0	2	<2.5	<2.5
						22.7		7.2		0.02		88.0		6.4		1.9		<2.5	

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: \* Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher



## Water Quality Monitoring Results at 18\_I

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
2-Jul-08	Sunny	Calm	11:09	Middle	0.1	22.6	22.6	7.6	7.6	0.02	0.02	90.6	90.6	8.1	8.1	1.9	1.9	<2.5	<2.5
						22.7		7.6		0.02		90.5		8.1		1.9			
4-Jul-08	Sunny	Calm	13:42	Middle	0.1	22.7	22.7	7.5	7.5	0.02	0.02	90.8	90.8	8.1	8.1	1.8	1.8	<2.5	<2.5
						22.7		7.5		0.02		90.7		8.1		1.8			
7-Jul-08	Sunny	Calm	11:09	Middle	0.1	22.6	22.6	7.5	7.5	0.02	0.02	89.9	89.9	7.9	7.9	1.7	1.7	<2.5	<2.5
						22.6		7.5		0.02		89.8		7.9		1.7			
9-Jul-08	Cloudy	Calm	11:31	Middle	0.1	22.7	22.7	7.5	7.5	0.02	0.02	90.5	90.5	8.0	8	1.8	1.8	<2.5	<2.5
						22.7		7.5		0.02		90.4		8.0		1.8			
11-Jul-08	Sunny	Calm	11:47	Middle	0.1	22.6	22.7	7.6	7.6	0.02	0.02	91.0	91	8.0	8	2.0	2	<2.5	<2.5
						22.7		7.6		0.02		90.9		8.0		2.0			
14-Jul-08	Sunny	Calm	11:39	Middle	0.1	22.6	22.6	7.7	7.7	0.02	0.02	91.9	91.9	8.2	8.2	2.2	2.2	<2.5	<2.5
						22.6		7.7		0.02		91.8		8.2		2.2			
16-Jul-08	Sunny	Calm	11:30	Middle	0.1	22.5	22.5	7.6	7.6	0.02	0.02	91.6	91.6	7.6	7.6	1.9	1.9	<2.5	<2.5
						22.5		7.6		0.02		91.5		7.6		1.9			
18-Jul-08	Sunny	Calm	13:53	Middle	0.1	22.6	22.6	7.5	7.5	0.02	0.02	90.7	90.7	7.2	7.2	1.7	1.7	<2.5	<2.5
						22.6		7.5		0.02		90.6		7.2		1.7			
21-Jul-08	Sunny	Calm	14:24	Middle	0.1	22.6	22.6	7.6	7.6	0.02	0.02	91.0	91	7.3	7.3	1.9	1.9	<2.5	<2.5
						22.6		7.6		0.02		90.9		7.3		1.9			
23-Jul-08	Sunny	Calm	14:07	Middle	0.1	22.7	22.7	7.5	7.5	0.02	0.02	90.1	90.1	7.1	7.1	1.8	1.8	<2.5	<2.5
						22.7		7.5		0.02		90.0		7.1		1.8			
25-Jul-08	Sunny	Calm	13:57	Middle	0.1	22.7	22.7	7.5	7.5	0.02	0.02	89.5	89.5	6.9	6.9	1.9	1.9	<2.5	<2.5
						22.7		7.5		0.02		89.4		6.9		1.9			
28-Jul-08	Sunny	Calm	12:38	Middle	0.1	22.6	22.6	7.4	7.4	0.02	0.02	87.8	87.8	6.5	6.5	1.6	1.6	<2.5	<2.5
						22.6		7.4		0.02		87.7		6.5		1.6			
30-Jul-08	Sunny	Calm	11:52	Middle	0.1	22.5	22.5	7.4	7.4	0.02	0.02	87.4	87.4	6.4	6.4	1.8	1.8	<2.5	<2.5
						22.5		7.4		0.02		87.3		6.4		1.8			

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: \* Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher

## Water Quality Monitoring Results at 18\_R

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
2-Jul-08	Sunny	Calm	11:05	Middle	0.175	22.6	22.6	7.6	7.6	0.02	0.02	90.9	90.7	8.1	8.1	1.9	1.9	<2.5	<2.5
						22.6		7.6		0.02		90.5		8.1		1.9			
4-Jul-08	Sunny	Calm	13:38	Middle	0.175	22.7	22.7	7.5	7.5	0.02	0.02	91.1	90.9	8.1	8.1	1.8	1.8	<2.5	<2.5
						22.7		7.5		0.02		90.7		8.1		1.8			
7-Jul-08	Sunny	Calm	11:05	Middle	0.175	22.6	22.6	7.5	7.5	0.02	0.02	90.2	90	7.9	7.9	1.7	1.7	<2.5	<2.5
						22.6		7.5		0.02		89.8		7.9		1.7			
9-Jul-08	Cloudy	Calm	11:27	Middle	0.175	22.7	22.7	7.5	7.5	0.02	0.02	90.8	90.6	8.0	8	1.8	1.8	<2.5	<2.5
						22.7		7.5		0.02		90.4		8.0		1.8			
11-Jul-08	Sunny	Calm	11:43	Middle	0.175	22.6	22.6	7.6	7.6	0.02	0.02	91.3	91.1	8.1	8.1	2.0	2	<2.5	<2.5
						22.6		7.6		0.02		90.9		8.0		2.0			
14-Jul-08	Sunny	Calm	11:35	Middle	0.175	22.6	22.6	7.7	7.7	0.02	0.02	92.2	92	8.3	8.3	2.2	2.2	<2.5	<2.5
						22.6		7.7		0.02		91.8		8.2		2.2			
16-Jul-08	Sunny	Calm	11:27	Middle	0.175	22.5	22.5	7.6	7.6	0.02	0.02	91.9	91.7	7.6	7.6	1.9	1.9	<2.5	<2.5
						22.5		7.6		0.02		91.5		7.6		1.9			
18-Jul-08	Sunny	Calm	13:49	Middle	0.175	22.6	22.6	7.5	7.5	0.02	0.02	91.0	90.8	7.2	7.2	1.7	1.7	<2.5	<2.5
						22.6		7.5		0.02		90.6		7.2		1.7			
21-Jul-08	Sunny	Calm	14:20	Middle	0.175	22.6	22.6	7.6	7.6	0.02	0.02	91.3	91.1	7.4	7.4	1.9	1.9	<2.5	<2.5
						22.6		7.6		0.02		90.9		7.3		1.9			
23-Jul-08	Sunny	Calm	14:03	Middle	0.175	22.7	22.7	7.5	7.5	0.02	0.02	90.4	90.2	7.1	7.1	1.8	1.8	<2.5	<2.5
						22.7		7.5		0.02		90.0		7.1		1.8			
25-Jul-08	Sunny	Calm	13:53	Middle	0.175	22.7	22.7	7.6	7.6	0.02	0.02	89.8	89.6	7.0	7	1.9	1.9	<2.5	<2.5
						22.7		7.6		0.02		89.4		6.9		1.9			
28-Jul-08	Sunny	Calm	12:34	Middle	0.175	22.5	22.6	7.4	7.4	0.02	0.02	88.1	87.9	6.6	6.6	1.6	1.6	<2.5	<2.5
						22.6		7.4		0.02		87.7		6.5		1.6			
30-Jul-08	Sunny	Calm	11:48	Middle	0.175	22.5	22.5	7.4	7.4	0.02	0.02	87.7	87.5	6.4	6.4	1.8	1.8	<2.5	<2.5
						22.5		7.4		0.02		87.3		6.4		1.8			

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: \* Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher

## Water Quality Monitoring Results at 21\_I

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
2-Jul-08	Sunny	Calm	11:01	Middle	0.14	22.6	22.6	7.6	7.6	0.02	0.02	91.0	91.2	8.2	8.2	2.0	2	<2.5	<2.5
						22.6		7.6		0.02		91.3		8.2		2.0			
4-Jul-08	Sunny	Calm	13:34	Middle	0.14	22.6	22.6	7.6	7.6	0.02	0.02	91.2	91.4	8.2	8.2	1.9	1.9	<2.5	<2.5
						22.6		7.6		0.02		91.5		8.2		1.9			
7-Jul-08	Sunny	Calm	11:01	Middle	0.14	22.5	22.5	7.5	7.5	0.02	0.02	90.3	90.5	8.0	8	1.8	1.8	<2.5	<2.5
						22.5		7.5		0.02		90.6		8.0		1.8			
9-Jul-08	Cloudy	Calm	11:23	Middle	0.14	22.7	22.7	7.5	7.6	0.02	0.02	90.9	91.1	8.1	8.1	1.9	1.9	<2.5	<2.5
						22.7		7.6		0.02		91.2		8.1		1.9			
11-Jul-08	Sunny	Calm	11:39	Middle	0.14	22.6	22.6	7.7	7.7	0.02	0.02	91.4	91.6	8.1	8.1	2.1	2.1	<2.5	<2.5
						22.6		7.7		0.02		91.7		8.1		2.1			
14-Jul-08	Sunny	Calm	11:31	Middle	0.14	22.5	22.5	7.7	7.7	0.02	0.02	92.3	92.5	8.3	8.3	2.3	2.3	<2.5	<2.5
						22.5		7.7		0.02		92.6		8.3		2.3			
16-Jul-08	Sunny	Calm	11:23	Middle	0.14	22.5	22.5	7.6	7.6	0.02	0.02	92.0	92.2	7.7	7.7	2.0	2	<2.5	<2.5
						22.5		7.6		0.02		92.3		7.7		2.0			
18-Jul-08	Sunny	Calm	13:45	Middle	0.14	22.5	22.5	7.6	7.6	0.02	0.02	91.1	91.3	7.3	7.3	1.8	1.8	<2.5	<2.5
						22.5		7.6		0.02		91.4		7.3		1.8			
21-Jul-08	Sunny	Calm	14:16	Middle	0.14	22.6	22.6	7.6	7.6	0.02	0.02	91.4	91.6	7.4	7.4	2.0	2	<2.5	<2.5
						22.6		7.6		0.02		91.7		7.4		2.0			
23-Jul-08	Sunny	Calm	13:59	Middle	0.14	22.7	22.7	7.5	7.5	0.02	0.02	90.5	90.7	7.2	7.2	1.9	1.9	<2.5	<2.5
						22.7		7.5		0.02		90.8		7.2		1.9			
25-Jul-08	Sunny	Calm	13:49	Middle	0.14	22.6	22.6	7.6	7.6	0.02	0.02	89.9	90.1	7.0	7	2.0	2	<2.5	<2.5
						22.6		7.6		0.02		90.2		7.0		2.0			
28-Jul-08	Sunny	Calm	12:30	Middle	0.14	22.5	22.5	7.5	7.5	0.02	0.02	90.2	90.2	6.8	6.8	1.7	1.7	<2.5	<2.5
						22.5		7.5		0.02		90.1		6.8		1.7			
30-Jul-08	Sunny	Calm	11:44	Middle	0.14	22.4	22.4	7.4	7.4	0.02	0.02	87.8	88	6.5	6.5	1.9	1.9	<2.5	<2.5
						22.4		7.4		0.02		88.1		6.5		1.9			

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: \* Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher

## Water Quality Monitoring Results at 21\_R

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
2-Jul-08	Sunny	Calm	10:57	Middle	0.1	22.5 22.6	22.6	7.6 7.6	7.6	0.02 0.02	0.02	92.1 91.5	91.8	8.3 8.2	8.3	1.9 2.0	2	<2.5 <2.5	<2.5
4-Jul-08	Sunny	Calm	13:30	Middle	0.1	22.6 22.6	22.6	7.6 7.6	7.6	0.02 0.02	0.02	92.3 91.7	92	8.3 8.2	8.3	1.8 1.9	1.9	<2.5 <2.5	<2.5
7-Jul-08	Sunny	Calm	10:57	Middle	0.1	22.5 22.5	22.5	7.5 7.5	7.5	0.02 0.02	0.02	91.4 90.8	91.1	8.1 8.0	8.1	1.7 1.8	1.8	<2.5 <2.5	<2.5
9-Jul-08	Cloudy	Calm	11:18	Middle	0.1	22.6 22.6	22.6	7.6 7.5	7.6	0.02 0.02	0.02	92.0 91.4	91.7	8.2 8.1	8.2	1.8 1.9	1.9	<2.5 <2.5	<2.5
11-Jul-08	Sunny	Calm	11:35	Middle	0.1	22.5 22.6	22.6	7.7 7.7	7.7	0.02 0.02	0.02	92.5 91.9	92.2	8.2 8.1	8.2	2.0 2.1	2.1	<2.5 <2.5	<2.5
14-Jul-08	Sunny	Calm	11:27	Middle	0.1	22.5 22.5	22.5	7.7 7.7	7.7	0.02 0.02	0.02	93.4 92.8	93.1	8.4 8.3	8.4	2.2 2.3	2.3	<2.5 <2.5	<2.5
16-Jul-08	Sunny	Calm	11:18	Middle	0.1	22.4 22.4	22.4	7.6 7.6	7.6	0.02 0.02	0.02	93.1 92.5	92.8	7.8 7.7	7.8	1.9 2.0	2	<2.5 <2.5	<2.5
18-Jul-08	Sunny	Calm	13:41	Middle	0.1	22.5 22.5	22.5	7.6 7.6	7.6	0.02 0.02	0.02	92.2 91.6	91.9	7.4 7.3	7.4	1.7 1.8	1.8	<2.5 <2.5	<2.5
21-Jul-08	Sunny	Calm	14:11	Middle	0.1	22.5 22.6	22.6	7.6 7.6	7.6	0.02 0.02	0.02	92.5 91.9	92.2	7.5 7.5	7.5	1.9 2.0	2	<2.5 <2.5	<2.5
23-Jul-08	Sunny	Calm	13:55	Middle	0.1	22.6 22.6	22.6	7.5 7.5	7.5	0.02 0.02	0.02	91.6 91.0	91.3	7.3 7.2	7.3	1.8 1.9	1.9	<2.5 <2.5	<2.5
25-Jul-08	Sunny	Calm	13:45	Middle	0.1	22.6 22.6	22.6	7.6 7.6	7.6	0.02 0.02	0.02	91.0 90.4	90.7	7.1 7.1	7.1	1.9 2.0	2	<2.5 <2.5	<2.5
28-Jul-08	Sunny	Calm	12:25	Middle	0.1	22.5 22.5	22.5	7.5 7.5	7.5	0.02 0.02	0.02	89.3 88.7	89	6.7 6.6	6.7	1.6 1.7	1.7	<2.5 <2.5	<2.5
30-Jul-08	Sunny	Calm	11:40	Middle	0.1	22.4 22.4	22.4	7.4 7.4	7.4	0.02 0.02	0.02	88.9 88.3	88.6	6.6 6.5	6.6	1.8 1.9	1.9	<2.5 <2.5	<2.5

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: \* Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher

## Water Quality Monitoring Results at 23\_I

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
2-Jul-08	Sunny	Calm	10:51	Middle	0.09	22.7	22.7	7.5	7.5	0.02	0.02	91.9	91.7	8.3	8.3	1.7	1.7	<2.5	<2.5
						22.7		7.5		0.02		91.5		8.2		1.7			
4-Jul-08	Sunny	Calm	13:24	Middle	0.09	22.7	22.7	7.4	7.5	0.02	0.02	92.1	91.9	8.2	8.2	1.6	1.6	<2.5	<2.5
						22.7		7.5		0.02		91.7		8.2		1.6			
7-Jul-08	Sunny	Calm	10:51	Middle	0.09	22.7	22.7	7.4	7.4	0.02	0.02	91.2	91	8.0	8	1.5	1.5	<2.5	<2.5
						22.7		7.4		0.02		90.8		8.0		1.5			
9-Jul-08	Cloudy	Calm	11:12	Middle	0.09	22.8	22.8	7.4	7.4	0.02	0.02	91.8	91.6	8.2	8.2	1.6	1.6	<2.5	<2.5
						22.8		7.4		0.02		91.4		8.1		1.6			
11-Jul-08	Sunny	Calm	11:29	Middle	0.09	22.7	22.7	7.5	7.6	0.02	0.02	92.3	92.1	8.2	8.2	1.8	1.8	<2.5	<2.5
						22.7		7.6		0.02		91.9		8.1		1.8			
14-Jul-08	Sunny	Calm	11:21	Middle	0.09	22.6	22.6	7.6	7.6	0.02	0.02	93.2	93	8.4	8.4	2.0	2	<2.5	<2.5
						22.6		7.6		0.02		92.8		8.3		2.0			
16-Jul-08	Sunny	Calm	11:12	Middle	0.09	22.6	22.6	7.5	7.5	0.02	0.02	92.9	92.7	7.8	7.8	1.7	1.7	<2.5	<2.5
						22.6		7.5		0.02		92.5		7.7		1.7			
18-Jul-08	Sunny	Calm	13:35	Middle	0.09	22.6	22.6	7.4	7.5	0.02	0.02	92.0	91.8	7.4	7.4	1.5	1.5	<2.5	<2.5
						22.6		7.5		0.02		91.6		7.3		1.5			
21-Jul-08	Sunny	Calm	14:05	Middle	0.09	22.7	22.7	7.5	7.5	0.02	0.02	92.3	92.1	7.5	7.5	1.7	1.7	<2.5	<2.5
						22.7		7.5		0.02		91.9		7.5		1.7			
23-Jul-08	Sunny	Calm	13:48	Middle	0.09	22.8	22.8	7.4	7.4	0.02	0.02	91.4	91.2	7.2	7.2	1.6	1.6	<2.5	<2.5
						22.8		7.4		0.02		91.0		7.2		1.6			
25-Jul-08	Sunny	Calm	13:39	Middle	0.09	22.8	22.8	7.5	7.5	0.02	0.02	90.8	90.6	7.1	7.1	1.7	1.7	<2.5	<2.5
						22.8		7.5		0.02		90.4		7.1		1.7			
28-Jul-08	Sunny	Calm	12:19	Middle	0.09	22.6	22.6	7.3	7.3	0.02	0.02	89.1	88.9	6.7	6.7	1.5	1.5	<2.5	<2.5
						22.6		7.3		0.02		88.7		6.6		1.5			
30-Jul-08	Sunny	Calm	11:34	Middle	0.09	22.5	22.5	7.3	7.3	0.02	0.02	88.7	88.5	6.6	6.6	1.6	1.6	<2.5	<2.5
						22.5		7.3		0.02		88.3		6.5		1.6			

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: \* Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher

## Water Quality Monitoring Results at 23\_R1

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
2-Jul-08	Sunny	Calm	10:38	Middle	0.09	22.6	22.6	7.5	7.5	0.02	0.02	93.9	93.5	8.5	8.5	1.8	1.9	<2.5	<2.5
						22.7		7.5		0.02		93.0		8.4		1.9			
4-Jul-08	Sunny	Calm	13:11	Middle	0.09	22.7	22.7	7.5	7.5	0.02	0.02	94.1	93.7	8.4	8.4	1.7	1.8	<2.5	<2.5
						22.7		7.5		0.02		93.2		8.4		1.8			
7-Jul-08	Sunny	Calm	10:38	Middle	0.09	22.6	22.6	7.4	7.4	0.02	0.02	93.2	92.8	8.2	8.2	1.6	1.7	<2.5	<2.5
						22.6		7.4		0.02		92.3		8.2		1.7			
9-Jul-08	Cloudy	Calm	10:59	Middle	0.09	22.7	22.7	7.4	7.4	0.02	0.02	93.8	93.4	8.4	8.4	1.7	1.8	<2.5	<2.5
						22.7		7.4		0.02		92.9		8.3		1.8			
11-Jul-08	Sunny	Calm	11:16	Middle	0.09	22.6	22.7	7.6	7.6	0.02	0.02	94.3	93.9	8.4	8.4	1.9	2	<2.5	<2.5
						22.7		7.6		0.02		93.4		8.3		2.0			
14-Jul-08	Sunny	Calm	11:08	Middle	0.09	22.6	22.6	7.6	7.6	0.02	0.02	95.2	94.8	8.6	8.6	2.1	2.2	<2.5	<2.5
						22.6		7.6		0.02		94.3		8.5		2.2			
16-Jul-08	Sunny	Calm	10:59	Middle	0.09	22.5	22.5	7.5	7.5	0.02	0.02	94.9	94.5	8.0	8	1.8	1.9	<2.5	<2.5
						22.5		7.5		0.02		94.0		7.9		1.9			
18-Jul-08	Sunny	Calm	13:22	Middle	0.09	22.6	22.6	7.5	7.5	0.02	0.02	94.0	93.6	7.6	7.6	1.6	1.7	<2.5	<2.5
						22.6		7.5		0.02		93.1		7.5		1.7			
21-Jul-08	Sunny	Calm	13:52	Middle	0.09	22.6	22.6	7.5	7.5	0.02	0.02	94.3	93.9	7.7	7.7	1.7	1.8	<2.5	<2.5
						22.6		7.5		0.02		93.4		7.6		1.8			
23-Jul-08	Sunny	Calm	13:35	Middle	0.09	22.7	22.7	7.4	7.4	0.02	0.02	93.4	93	7.4	7.4	1.6	1.7	<2.5	<2.5
						22.7		7.4		0.02		92.5		7.4		1.7			
25-Jul-08	Sunny	Calm	13:26	Middle	0.09	22.7	22.7	7.5	7.5	0.02	0.02	92.8	92.4	7.3	7.3	1.7	1.8	<2.5	<2.5
						22.7		7.5		0.02		91.9		7.2		1.8			
28-Jul-08	Sunny	Calm	12:06	Middle	0.09	22.6	22.6	7.3	7.3	0.02	0.02	91.1	90.7	6.9	6.9	1.5	1.6	<2.5	<2.5
						22.6		7.3		0.02		90.2		6.8		1.6			
30-Jul-08	Sunny	Calm	11:21	Middle	0.09	22.5	22.5	7.3	7.3	0.02	0.02	90.7	90.3	6.8	6.8	1.6	1.7	<2.5	<2.5
						22.5		7.3		0.02		89.8		6.7		1.7			

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: \* Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher

## Water Quality Monitoring Results at 23\_R2

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
2-Jul-08	Sunny	Calm	10:44	Middle	0.1	22.6	22.7	7.5	7.5	0.02	0.02	93.3	93.2	8.4	8.4	1.6	1.7	<2.5	<2.5
						22.7		7.5		0.02		93.0		8.4		1.7			
4-Jul-08	Sunny	Calm	13:17	Middle	0.1	22.7	22.7	7.5	7.5	0.02	0.02	93.5	93.4	8.4	8.4	1.5	1.6	<2.5	<2.5
						22.7		7.4		0.02		93.2		8.4		1.6			
7-Jul-08	Sunny	Calm	10:44	Middle	0.1	22.6	22.6	7.4	7.4	0.02	0.02	92.6	92.5	8.2	8.2	1.4	1.5	<2.5	<2.5
						22.6		7.4		0.02		92.3		8.2		1.5			
9-Jul-08	Cloudy	Calm	11:05	Middle	0.1	22.7	22.7	7.4	7.4	0.02	0.02	93.2	93.1	8.3	8.3	1.5	1.6	<2.5	<2.5
						22.7		7.4		0.02		92.9		8.3		1.6			
11-Jul-08	Sunny	Calm	11:22	Middle	0.1	22.7	22.7	7.6	7.6	0.02	0.02	93.7	93.6	8.3	8.3	1.7	1.8	<2.5	<2.5
						22.7		7.5		0.02		93.4		8.3		1.8			
14-Jul-08	Sunny	Calm	11:13	Middle	0.1	22.6	22.6	7.6	7.6	0.02	0.02	94.6	94.5	8.5	8.5	1.9	2	<2.5	<2.5
						22.6		7.6		0.02		94.3		8.5		2.0			
16-Jul-08	Sunny	Calm	11:05	Middle	0.1	22.5	22.5	7.5	7.5	0.02	0.02	94.3	94.2	7.9	7.9	1.6	1.7	<2.5	<2.5
						22.5		7.5		0.02		94.0		7.9		1.7			
18-Jul-08	Sunny	Calm	13:28	Middle	0.1	22.6	22.6	7.5	7.5	0.02	0.02	93.4	93.3	7.5	7.5	1.4	1.5	<2.5	<2.5
						22.6		7.4		0.02		93.1		7.5		1.5			
21-Jul-08	Sunny	Calm	13:58	Middle	0.1	22.6	22.7	7.5	7.5	0.02	0.02	93.7	93.6	7.6	7.6	1.6	1.7	<2.5	<2.5
						22.7		7.5		0.02		93.4		7.6		1.7			
23-Jul-08	Sunny	Calm	13:41	Middle	0.1	22.7	22.7	7.4	7.4	0.02	0.02	92.8	92.7	7.4	7.4	1.5	1.6	<2.5	<2.5
						22.7		7.4		0.02		92.5		7.3		1.6			
25-Jul-08	Sunny	Calm	13:32	Middle	0.1	22.7	22.7	7.5	7.5	0.02	0.02	92.2	92.1	7.2	7.2	1.6	1.7	<2.5	<2.5
						22.7		7.5		0.02		91.9		7.2		1.7			
28-Jul-08	Sunny	Calm	12:12	Middle	0.1	22.6	22.6	7.3	7.3	0.02	0.02	90.5	90.4	6.8	6.8	1.4	1.5	<2.5	<2.5
						22.6		7.3		0.02		90.2		6.8		1.5			
30-Jul-08	Sunny	Calm	11:27	Middle	0.1	22.5	22.5	7.3	7.3	0.02	0.02	90.1	90	6.7	6.7	1.5	1.6	<2.5	<2.5
						22.5		7.3		0.02		89.8		6.7		1.6			

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: \* Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher

## Water Quality Monitoring Results at 26\_I

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
2-Jul-08	Sunny	Calm	10:03	Middle	0.14	22.6	22.6	7.7	7.7	0.03	0.03	93.3	93.3	8.3	8.3	1.7	1.7	<2.5	<2.5
						22.6		7.7		0.03		93.2		8.3		1.6			
4-Jul-08	Sunny	Calm	12:36	Middle	0.14	22.7	22.7	7.7	7.7	0.03	0.03	93.5	93.5	8.3	8.3	1.6	1.6	<2.5	<2.5
						22.7		7.7		0.03		93.4		8.3		1.5			
7-Jul-08	Sunny	Calm	10:03	Middle	0.14	22.6	22.6	7.6	7.6	0.03	0.03	92.6	92.6	8.1	8.1	1.4	1.4	<2.5	<2.5
						22.6		7.6		0.03		92.5		8.1		1.3			
9-Jul-08	Cloudy	Calm	10:25	Middle	0.14	22.7	22.7	7.7	7.7	0.03	0.03	93.2	93.2	8.3	8.3	1.5	1.5	<2.5	<2.5
						22.7		7.7		0.03		93.1		8.2		1.4			
11-Jul-08	Sunny	Calm	10:41	Middle	0.14	22.6	22.6	7.8	7.8	0.03	0.03	93.7	93.7	8.3	8.3	1.7	1.7	<2.5	<2.5
						22.6		7.8		0.03		93.6		8.2		1.6			
14-Jul-08	Sunny	Calm	10:33	Middle	0.14	22.6	22.6	7.8	7.8	0.02	0.02	94.6	94.6	8.5	8.5	1.9	1.9	<2.5	<2.5
						22.6		7.8		0.02		94.5		8.4		1.8			
16-Jul-08	Sunny	Calm	10:25	Middle	0.14	22.5	22.5	7.8	7.8	0.03	0.03	94.3	94.3	7.8	7.8	1.6	1.6	<2.5	<2.5
						22.5		7.8		0.03		94.2		7.8		1.5			
18-Jul-08	Sunny	Calm	12:47	Middle	0.14	22.6	22.6	7.7	7.7	0.02	0.02	93.4	93.4	7.5	7.5	1.4	1.4	<2.5	<2.5
						22.6		7.7		0.02		93.3		7.4		1.3			
21-Jul-08	Sunny	Calm	13:18	Middle	0.14	22.6	22.6	7.7	7.7	0.03	0.03	93.7	93.7	7.6	7.6	1.6	1.6	<2.5	<2.5
						22.6		7.7		0.03		93.6		7.5		1.5			
23-Jul-08	Sunny	Calm	13:01	Middle	0.14	22.7	22.7	7.7	7.7	0.03	0.03	92.8	92.8	7.3	7.3	1.5	1.5	<2.5	<2.5
						22.7		7.7		0.03		92.7		7.3		1.4			
25-Jul-08	Sunny	Calm	12:51	Middle	0.14	22.7	22.7	7.7	7.7	0.03	0.03	92.2	92.2	7.2	7.2	1.6	1.6	<2.5	<2.5
						22.7		7.7		0.03		92.1		7.1		1.5			
28-Jul-08	Sunny	Calm	11:32	Middle	0.14	22.6	22.6	7.6	7.6	0.03	0.03	90.5	90.5	6.8	6.8	1.4	1.4	<2.5	<2.5
						22.6		7.6		0.03		90.4		6.7		1.3			
30-Jul-08	Sunny	Calm	10:46	Middle	0.14	22.5	22.5	7.5	7.5	0.03	0.03	90.1	90.1	6.7	6.7	1.6	1.6	<2.5	<2.5
						22.5		7.5		0.03		90.0		6.6		1.5			

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: \* Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher



## Water Quality Monitoring Results at 26\_R

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
2-Jul-08	Sunny	Calm	10:28	Middle	0.09	22.7 22.7	22.7	7.7 7.7	7.7	0.03 0.03	0.03	92.4 91.9	92.2	8.3 8.2	8.3	1.8 1.9	1.9	<2.5 <2.5	<2.5
4-Jul-08	Sunny	Calm	13:01	Middle	0.09	22.8 22.8	22.8	7.6 7.6	7.6	0.02 0.02	0.02	92.6 92.1	92.4	8.3 8.2	8.3	1.7 1.8	1.8	<2.5 <2.5	<2.5
7-Jul-08	Sunny	Calm	10:28	Middle	0.09	22.7 22.7	22.7	7.6 7.6	7.6	0.02 0.02	0.02	91.7 91.2	91.5	8.1 8.0	8.1	1.5 1.6	1.6	<2.5 <2.5	<2.5
9-Jul-08	Cloudy	Calm	10:49	Middle	0.09	22.8 22.8	22.8	7.6 7.6	7.6	0.03 0.03	0.03	92.3 91.8	92.1	8.2 8.2	8.2	1.6 1.7	1.7	<2.5 <2.5	<2.5
11-Jul-08	Sunny	Calm	11:06	Middle	0.09	22.7 22.8	22.8	7.7 7.7	7.7	0.03 0.03	0.03	92.8 92.3	92.6	8.2 8.2	8.2	1.8 1.9	1.9	<2.5 <2.5	<2.5
14-Jul-08	Sunny	Calm	10:57	Middle	0.09	22.7 22.7	22.7	7.8 7.8	7.8	0.02 0.02	0.02	93.7 93.2	93.5	8.4 8.4	8.4	2.0 2.1	2.1	<2.5 <2.5	<2.5
16-Jul-08	Sunny	Calm	10:49	Middle	0.09	22.6 22.6	22.6	7.7 7.7	7.7	0.02 0.02	0.02	93.4 92.9	93.2	7.8 7.7	7.8	1.7 1.8	1.8	<2.5 <2.5	<2.5
18-Jul-08	Sunny	Calm	13:12	Middle	0.09	22.7 22.7	22.7	7.6 7.6	7.6	0.02 0.02	0.02	92.5 92.0	92.3	7.4 7.4	7.4	1.5 1.6	1.6	<2.5 <2.5	<2.5
21-Jul-08	Sunny	Calm	13:42	Middle	0.09	22.7 22.7	22.7	7.7 7.7	7.7	0.02 0.02	0.02	92.8 92.3	92.6	7.5 7.5	7.5	1.6 1.7	1.7	<2.5 <2.5	<2.5
23-Jul-08	Sunny	Calm	13:25	Middle	0.09	22.8 22.8	22.8	7.6 7.6	7.6	0.02 0.02	0.02	91.9 91.4	91.7	7.3 7.2	7.3	1.5 1.6	1.6	<2.5 <2.5	<2.5
25-Jul-08	Sunny	Calm	13:16	Middle	0.09	22.8 22.8	22.8	7.7 7.7	7.7	0.02 0.02	0.02	91.3 90.8	91.1	7.1 7.1	7.1	1.6 1.7	1.7	<2.5 <2.5	<2.5
28-Jul-08	Sunny	Calm	11:56	Middle	0.09	22.7 22.7	22.7	7.5 7.5	7.5	0.02 0.02	0.02	89.6 89.1	89.4	6.7 6.7	6.7	1.5 1.6	1.6	<2.5 <2.5	<2.5
30-Jul-08	Sunny	Calm	11:11	Middle	0.09	22.6 22.6	22.6	7.5 7.5	7.5	0.03 0.03	0.03	89.2 88.7	89	6.6 6.6	6.6	1.6 1.7	1.7	<2.5 <2.5	<2.5

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: \* Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher

## Water Quality Monitoring Results at 27\_I

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
2-Jul-08	Sunny	Calm	10:21	Middle	0.08	22.6	22.7	7.7	7.7	0.03	0.03	93.7	93.7	8.4	8.4	1.9	1.9	<2.5	<2.5
						22.7		7.7		0.03		93.6		8.4		1.9			
4-Jul-08	Sunny	Calm	12:55	Middle	0.08	22.7	22.7	7.7	7.7	0.02	0.02	93.9	93.9	8.4	8.4	1.8	1.8	<2.5	<2.5
						22.7		7.6		0.02		93.8		8.4		1.8			
7-Jul-08	Sunny	Calm	10:21	Middle	0.08	22.6	22.6	7.6	7.6	0.02	0.02	93.0	93	8.2	8.2	1.6	1.6	<2.5	<2.5
						22.6		7.6		0.02		92.9		8.2		1.6			
9-Jul-08	Cloudy	Calm	10:43	Middle	0.08	22.7	22.8	7.6	7.6	0.03	0.03	93.6	93.6	8.3	8.3	1.7	1.7	<2.5	<2.5
						22.8		7.6		0.03		93.5		8.3		1.7			
11-Jul-08	Sunny	Calm	11:00	Middle	0.08	22.7	22.7	7.8	7.8	0.03	0.03	94.1	94.1	8.4	8.4	1.9	1.9	<2.5	<2.5
						22.7		7.7		0.03		94.0		8.3		1.9			
14-Jul-08	Sunny	Calm	10:51	Middle	0.08	22.6	22.6	7.8	7.8	0.02	0.02	95.0	95	8.6	8.6	2.1	2.1	<2.5	<2.5
						22.6		7.8		0.02		94.9		8.5		2.1			
16-Jul-08	Sunny	Calm	10:43	Middle	0.08	22.5	22.6	7.7	7.7	0.03	0.03	94.7	94.7	7.9	7.9	1.8	1.8	<2.5	<2.5
						22.6		7.7		0.03		94.6		7.9		1.8			
18-Jul-08	Sunny	Calm	13:05	Middle	0.08	22.6	22.6	7.7	7.7	0.02	0.02	93.8	93.8	7.5	7.5	1.6	1.6	<2.5	<2.5
						22.6		7.6		0.02		93.7		7.5		1.6			
21-Jul-08	Sunny	Calm	13:36	Middle	0.08	22.6	22.7	7.7	7.7	0.02	0.02	94.1	94.1	7.7	7.7	1.7	1.7	<2.5	<2.5
						22.7		7.7		0.02		94.0		7.7		1.7			
23-Jul-08	Sunny	Calm	13:19	Middle	0.08	22.7	22.8	7.6	7.6	0.02	0.02	93.2	93.2	7.4	7.4	1.6	1.6	<2.5	<2.5
						22.8		7.6		0.02		93.1		7.4		1.6			
25-Jul-08	Sunny	Calm	13:10	Middle	0.08	22.7	22.7	7.7	7.7	0.02	0.02	92.6	92.6	7.3	7.3	1.7	1.7	<2.5	<2.5
						22.7		7.7		0.02		92.5		7.3		1.7			
28-Jul-08	Sunny	Calm	11:50	Middle	0.08	22.6	22.6	7.5	7.5	0.02	0.02	90.9	90.9	6.9	6.9	1.6	1.6	<2.5	<2.5
						22.6		7.5		0.02		90.8		6.8		1.6			
30-Jul-08	Sunny	Calm	11:04	Middle	0.08	22.5	22.5	7.5	7.5	0.03	0.03	90.5	90.5	6.7	6.7	1.7	1.7	<2.5	<2.5
						22.5		7.5		0.03		90.4		6.7		1.7			

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: \* Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher

## Water Quality Monitoring Results at 27\_R

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
2-Jul-08	Sunny	Calm	10:12	Middle	0.13	22.6	22.6	7.7	7.7	0.03	0.03	95.1	94.9	8.6	8.6	2.2	2.2	<2.5	<2.5
						22.7		7.7		0.03		94.6		8.5		2.2			
4-Jul-08	Sunny	Calm	12:45	Middle	0.13	22.7	22.7	7.7	7.7	0.03	0.03	95.3	95.1	8.6	8.6	2.1	2.1	<2.5	<2.5
						22.7		7.7		0.03		94.8		8.5		2.1			
7-Jul-08	Sunny	Calm	10:12	Middle	0.13	22.6	22.6	7.6	7.6	0.03	0.03	94.4	94.2	8.4	8.4	1.9	1.9	<2.5	<2.5
						22.6		7.6		0.03		93.9		8.3		1.9			
9-Jul-08	Cloudy	Calm	10:33	Middle	0.13	22.7	22.7	7.6	7.6	0.03	0.03	95.0	94.8	8.5	8.5	2.0	2	<2.5	<2.5
						22.7		7.6		0.03		94.5		8.4		2.0			
11-Jul-08	Sunny	Calm	10:50	Middle	0.13	22.6	22.6	7.8	7.8	0.03	0.03	95.5	95.3	8.5	8.5	2.2	2.2	<2.5	<2.5
						22.6		7.8		0.03		95.0		8.4		2.2			
14-Jul-08	Sunny	Calm	10:41	Middle	0.13	22.6	22.6	7.8	7.8	0.02	0.02	96.4	96.2	8.7	8.7	2.4	2.4	<2.5	<2.5
						22.6		7.8		0.02		95.9		8.6		2.4			
16-Jul-08	Sunny	Calm	10:33	Middle	0.13	22.5	22.5	7.7	7.7	0.03	0.03	96.1	95.9	8.1	8.1	2.1	2.1	<2.5	<2.5
						22.5		7.7		0.03		95.6		8.0		2.1			
18-Jul-08	Sunny	Calm	12:56	Middle	0.13	22.6	22.6	7.7	7.7	0.02	0.02	95.2	95	7.7	7.7	1.9	1.9	<2.5	<2.5
						22.6		7.7		0.02		94.7		7.6		1.9			
21-Jul-08	Sunny	Calm	13:26	Middle	0.13	22.6	22.6	7.7	7.7	0.03	0.03	95.5	95.3	7.8	7.8	2.0	2	<2.5	<2.5
						22.6		7.7		0.03		95.0		7.8		2.0			
23-Jul-08	Sunny	Calm	13:09	Middle	0.13	22.7	22.7	7.6	7.6	0.03	0.03	94.6	94.4	7.6	7.6	1.9	1.9	<2.5	<2.5
						22.7		7.6		0.03		94.1		7.5		1.9			
25-Jul-08	Sunny	Calm	13:00	Middle	0.13	22.7	22.7	7.7	7.7	0.03	0.03	94.0	93.8	7.4	7.4	2.0	2	<2.5	<2.5
						22.7		7.7		0.03		93.5		7.4		2.0			
28-Jul-08	Sunny	Calm	11:40	Middle	0.13	22.6	22.6	7.6	7.6	0.03	0.03	92.3	92.1	7.0	7	1.8	1.8	<2.5	<2.5
						22.6		7.6		0.03		91.8		6.9		1.8			
30-Jul-08	Sunny	Calm	10:55	Middle	0.13	22.5	22.5	7.5	7.5	0.03	0.03	91.9	91.7	6.9	6.9	1.9	1.9	<2.5	<2.5
						22.5		7.5		0.03		91.4		6.8		1.9			

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: \* Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher

## Water Quality Monitoring Results at 40\_I

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
2-Jul-08	Sunny	Calm	9:43	Middle	0.09	22.9	22.9	7.7	7.7	0.05	0.05	98.9	98.8	8.7	8.7	1.9	1.9	<2.5	<2.5
						22.9		7.6		0.05		98.7		8.7		1.9			
4-Jul-08	Sunny	Calm	12:17	Middle	0.09	22.9	22.9	7.6	7.6	0.04	0.04	99.1	99	8.7	8.7	1.8	1.8	<2.5	<2.5
						22.9		7.6		0.04		98.9		8.7		1.8			
7-Jul-08	Sunny	Calm	9:43	Middle	0.09	22.8	22.8	7.6	7.6	0.04	0.04	98.2	98.1	8.5	8.5	1.6	1.6	<2.5	<2.5
						22.8		7.6		0.04		98.0		8.5		1.6			
9-Jul-08	Cloudy	Calm	10:05	Middle	0.09	23.0	23	7.6	7.6	0.04	0.04	98.8	98.7	8.6	8.6	1.7	1.7	<2.5	<2.5
						23.0		7.6		0.04		98.6		8.6		1.7			
11-Jul-08	Sunny	Calm	10:22	Middle	0.09	22.9	22.9	7.7	7.7	0.04	0.04	99.3	99.2	8.6	8.6	1.9	1.9	<2.5	<2.5
						22.9		7.7		0.04		99.1		8.6		1.9			
14-Jul-08	Sunny	Calm	10:13	Middle	0.09	22.8	22.8	7.8	7.8	0.04	0.04	100.2	100.1	8.8	8.8	2.1	2.1	<2.5	<2.5
						22.8		7.8		0.04		100.0		8.8		2.1			
16-Jul-08	Sunny	Calm	10:05	Middle	0.09	22.8	22.8	7.7	7.7	0.04	0.04	99.9	99.8	8.2	8.2	1.8	1.8	<2.5	<2.5
						22.8		7.7		0.04		99.7		8.2		1.8			
18-Jul-08	Sunny	Calm	12:28	Middle	0.09	22.8	22.8	7.6	7.6	0.05	0.05	99.0	98.9	7.8	7.8	1.6	1.6	<2.5	<2.5
						22.8		7.6		0.05		98.8		7.8		1.6			
21-Jul-08	Sunny	Calm	12:58	Middle	0.09	22.9	22.9	7.6	7.6	0.05	0.05	99.3	99.2	7.9	7.9	1.8	1.8	<2.5	<2.5
						22.9		7.6		0.05		99.1		7.9		1.8			
23-Jul-08	Sunny	Calm	12:41	Middle	0.09	23.0	23	7.6	7.6	0.05	0.05	98.4	98.3	7.7	7.7	1.7	1.7	<2.5	<2.5
						23.0		7.6		0.05		98.2		7.7		1.7			
25-Jul-08	Sunny	Calm	12:32	Middle	0.09	22.9	22.9	7.6	7.6	0.05	0.05	97.8	97.7	7.5	7.5	1.8	1.8	<2.5	<2.5
						22.9		7.6		0.05		97.6		7.5		1.8			
28-Jul-08	Sunny	Calm	11:12	Middle	0.09	22.8	22.8	7.5	7.5	0.05	0.05	96.1	96	7.1	7.1	1.5	1.5	<2.5	<2.5
						22.8		7.5		0.05		95.9		7.1		1.5			
30-Jul-08	Sunny	Calm	10:26	Middle	0.09	22.7	22.7	7.5	7.5	0.05	0.05	95.7	95.6	7.0	7	1.7	1.7	<2.5	<2.5
						22.7		7.4		0.05		95.5		7.0		1.7			

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: \* Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher

## Water Quality Monitoring Results at 40\_R

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
2-Jul-08	Sunny	Calm	9:38	Middle	0.2	22.9	22.9	7.7	7.7	0.05	0.05	100.4	100.5	8.9	8.9	2.1	2.1	<2.5	<2.5
						22.9		7.7		0.05		100.6		8.9		2.0			
4-Jul-08	Sunny	Calm	12:11	Middle	0.2	22.9	22.9	7.7	7.7	0.04	0.04	100.6	100.7	8.9	8.9	2.0	2	<2.5	<2.5
						22.9		7.6		0.04		100.8		8.9		1.9			
7-Jul-08	Sunny	Calm	9:38	Middle	0.2	22.8	22.8	7.6	7.6	0.04	0.04	99.7	99.8	8.7	8.7	1.8	1.8	<2.5	<2.5
						22.8		7.6		0.04		99.9		8.7		1.7			
9-Jul-08	Cloudy	Calm	10:00	Middle	0.2	22.9	22.9	7.6	7.6	0.04	0.04	100.3	100.4	8.8	8.8	1.9	1.9	<2.5	<2.5
						22.9		7.6		0.04		100.5		8.8		1.8			
11-Jul-08	Sunny	Calm	10:16	Middle	0.2	22.9	22.9	7.8	7.8	0.04	0.04	100.8	100.9	8.8	8.8	2.1	2.1	<2.5	<2.5
						22.9		7.7		0.04		101.0		8.8		2.0			
14-Jul-08	Sunny	Calm	10:08	Middle	0.2	22.8	22.8	7.8	7.8	0.04	0.04	101.7	101.8	9.0	9	2.3	2.3	<2.5	<2.5
						22.8		7.8		0.04		101.9		9.0		2.2			
16-Jul-08	Sunny	Calm	9:59	Middle	0.2	22.7	22.7	7.7	7.7	0.04	0.04	101.4	101.5	8.4	8.4	2.0	2	<2.5	<2.5
						22.7		7.7		0.04		101.6		8.4		1.9			
18-Jul-08	Sunny	Calm	12:22	Middle	0.2	22.8	22.8	7.7	7.7	0.05	0.05	100.5	100.6	8.0	8	1.8	1.8	<2.5	<2.5
						22.8		7.6		0.05		100.7		8.0		1.7			
21-Jul-08	Sunny	Calm	12:53	Middle	0.2	22.9	22.9	7.7	7.7	0.05	0.05	100.8	100.9	8.1	8.1	2.0	2	<2.5	<2.5
						22.9		7.7		0.05		101.0		8.1		1.9			
23-Jul-08	Sunny	Calm	12:36	Middle	0.2	22.9	22.9	7.6	7.6	0.05	0.05	99.9	100	7.9	7.9	1.9	1.9	<2.5	<2.5
						22.9		7.6		0.05		100.1		7.9		1.8			
25-Jul-08	Sunny	Calm	12:26	Middle	0.2	22.9	22.9	7.7	7.7	0.05	0.05	99.3	99.4	7.7	7.7	1.9	1.9	<2.5	<2.5
						22.9		7.7		0.05		99.5		7.7		1.9			
28-Jul-08	Sunny	Calm	11:07	Middle	0.2	22.8	22.8	7.5	7.5	0.05	0.05	97.6	97.7	7.3	7.3	1.6	1.6	<2.5	<2.5
						22.8		7.5		0.05		97.8		7.3		1.6			
30-Jul-08	Sunny	Calm	10:21	Middle	0.2	22.7	22.7	7.5	7.5	0.05	0.05	97.2	97.3	7.2	7.2	1.8	1.8	<2.5	<2.5
						22.7		7.5		0.05		97.4		7.2		1.8			

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: \* Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher

## Water Quality Monitoring Results at CSS\_I

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
2-Jul-08	Sunny	Calm	9:50	Middle	0.19	22.7	22.7	7.7	7.7	0.03	0.03	97.8	97.9	8.7	8.7	1.9	1.9	<2.5	<2.5
						22.7		7.7		0.03		97.9		8.7		1.8			
4-Jul-08	Sunny	Calm	12:23	Middle	0.19	22.8	22.8	7.7	7.7	0.03	0.03	98.0	98.1	8.7	8.7	1.8	1.8	<2.5	<2.5
						22.8		7.7		0.03		98.1		8.7		1.7			
7-Jul-08	Sunny	Calm	9:50	Middle	0.19	22.7	22.7	7.6	7.6	0.03	0.03	97.1	97.2	8.5	8.5	1.6	1.6	<2.5	<2.5
						22.7		7.6		0.03		97.2		8.5		1.5			
9-Jul-08	Cloudy	Calm	10:12	Middle	0.19	22.8	22.8	7.6	7.6	0.03	0.03	97.7	97.8	8.6	8.6	1.7	1.7	<2.5	<2.5
						22.8		7.6		0.03		97.8		8.6		1.6			
11-Jul-08	Sunny	Calm	10:28	Middle	0.19	22.7	22.7	7.8	7.8	0.03	0.03	98.2	98.3	8.6	8.6	1.9	1.9	<2.5	<2.5
						22.7		7.8		0.03		98.3		8.6		1.8			
14-Jul-08	Sunny	Calm	10:20	Middle	0.19	22.7	22.7	7.8	7.8	0.03	0.03	99.1	99.2	8.8	8.8	2.1	2.1	<2.5	<2.5
						22.7		7.8		0.03		99.2		8.8		2.0			
16-Jul-08	Sunny	Calm	10:11	Middle	0.19	22.6	22.6	7.7	7.7	0.03	0.03	98.8	98.9	8.2	8.2	1.8	1.8	<2.5	<2.5
						22.6		7.7		0.03		98.9		8.2		1.7			
18-Jul-08	Sunny	Calm	12:34	Middle	0.19	22.7	22.7	7.7	7.7	0.03	0.03	97.9	98	7.8	7.8	1.6	1.6	<2.5	<2.5
						22.7		7.7		0.03		98.0		7.8		1.5			
21-Jul-08	Sunny	Calm	13:05	Middle	0.19	22.7	22.7	7.7	7.7	0.03	0.03	98.2	98.3	7.9	7.9	1.8	1.8	<2.5	<2.5
						22.7		7.7		0.03		98.3		7.9		1.7			
23-Jul-08	Sunny	Calm	12:48	Middle	0.19	22.8	22.8	7.6	7.6	0.03	0.03	97.3	97.4	7.7	7.7	2.2	2.2	<2.5	<2.5
						22.8		7.6		0.03		97.4		7.7		2.1			
25-Jul-08	Sunny	Calm	12:38	Middle	0.19	22.8	22.8	7.7	7.7	0.03	0.03	96.7	96.8	7.5	7.5	2.3	2.3	<2.5	<2.5
						22.8		7.7		0.03		96.8		7.5		2.2			
28-Jul-08	Sunny	Calm	11:19	Middle	0.19	22.6	22.6	7.5	7.6	0.03	0.03	95.0	95.1	7.1	7.1	2.0	2	<2.5	<2.5
						22.6		7.6		0.03		95.1		7.1		1.9			
30-Jul-08	Sunny	Calm	10:33	Middle	0.19	22.6	22.6	7.5	7.5	0.03	0.03	94.6	94.7	7.0	7	2.2	2.2	<2.5	<2.5
						22.6		7.5		0.03		94.7		7.0		2.1			

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: \* Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher

## Water Quality Monitoring Results at TCB\_I

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
2-Jul-08	Sunny	Calm	11:53	Middle	0.35	23.8	23.8	7.3	7.3	12.18	12.17	97.0	96.9	8.3	8.3	4.5	4.4	4.0	4
						23.8		7.3		12.16		96.8		8.2		4.3		4.0	
4-Jul-08	Sunny	Calm	14:27	Middle	0.35	23.9	23.9	7.2	7.2	12.16	12.16	97.2	97.1	8.2	8.2	2.4	2.3	<2.5	<2.5
						23.9		7.2		12.15		97.0		8.2		2.2		<2.5	
7-Jul-08	Sunny	Calm	11:53	Middle	0.35	23.8	23.8	7.2	7.2	12.10	12.11	96.3	96.2	8.0	8	2.1	2.2	<2.5	<2.5
						23.8		7.2		12.11		96.1		8.0		2.2		<2.5	
9-Jul-08	Cloudy	Calm	12:15	Middle	0.35	23.9	23.9	7.2	7.2	12.33	12.32	96.9	96.8	8.2	8.2	4.2	4.1	<2.5	<2.5
						23.9		7.2		12.31		96.7		8.2		4.0		<2.5	
11-Jul-08	Sunny	Calm	12:31	Middle	0.35	23.8	23.8	7.3	7.3	12.13	12.12	97.4	97.3	8.2	8.2	4.4	4.3	<2.5	<2.5
						23.8		7.3		12.11		97.2		8.2		4.2		<2.5	
14-Jul-08	Sunny	Calm	12:23	Middle	0.35	23.8	23.8	7.4	7.4	12.11	12.11	98.3	98.2	8.4	8.4	4.6	4.5	<2.5	<2.5
						23.8		7.4		12.10		98.1		8.4		4.4		<2.5	
16-Jul-08	Sunny	Calm	12:15	Middle	0.35	23.7	23.7	7.3	7.3	12.06	12.06	98.0	97.9	7.8	7.8	4.3	4.2	<2.5	<2.5
						23.7		7.3		12.05		97.8		7.7		4.1		<2.5	
18-Jul-08	Sunny	Calm	14:37	Middle	0.35	23.8	23.8	7.2	7.2	12.56	12.56	97.1	97	7.4	7.4	3.9	3.8	<2.5	<2.5
						23.8		7.2		12.55		96.9		7.4		3.7		<2.5	
21-Jul-08	Sunny	Calm	15:08	Middle	0.35	23.8	23.8	7.2	7.3	12.66	12.66	97.4	97.3	7.5	7.5	4.5	4.4	<2.5	<2.5
						23.8		7.3		12.65		97.2		7.5		4.3		<2.5	
23-Jul-08	Sunny	Calm	14:51	Middle	0.35	23.9	23.9	7.2	7.2	12.56	12.55	96.5	96.4	7.2	7.2	4.3	4.2	<2.5	<2.5
						23.9		7.2		12.54		96.3		7.2		4.1		<2.5	
25-Jul-08	Sunny	Calm	14:41	Middle	0.35	23.9	23.9	7.2	7.2	12.32	12.33	95.9	95.8	7.1	7.1	4.4	4.3	<2.5	<2.5
						23.9		7.2		12.33		95.7		7.1		4.2		<2.5	
28-Jul-08	Sunny	Calm	13:22	Middle	0.35	23.8	23.8	7.1	7.1	12.12	12.12	94.2	94.1	6.7	6.7	3.8	3.7	<2.5	<2.5
						23.8		7.1		12.11		94.0		6.7		3.6		<2.5	
30-Jul-08	Sunny	Calm	12:36	Middle	0.35	23.7	23.7	7.1	7.1	12.08	12.09	93.8	93.7	6.6	6.6	4.2	4.1	<2.5	<2.5
						23.7		7.1		12.09		93.6		6.6		4.0		<2.5	

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: \* Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher

## Water Quality Monitoring Results at TCB\_R

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
2-Jul-08	Sunny	Calm	11:48	Middle	0.2	23.9	23.9	7.3	7.3	18.81	18.82	96.0	95.9	8.2	8.2	7.1	7.2	7.0	7
						23.9		7.3		18.83		95.8		8.1		7.3		7.0	
4-Jul-08	Sunny	Calm	14:21	Middle	0.2	23.9	23.9	7.3	7.3	18.79	18.8	96.2	96.1	8.1	8.1	2.5	2.6	<2.5	<2.5
						23.9		7.3		18.81		96.0		8.1		2.6		<2.5	
7-Jul-08	Sunny	Calm	11:48	Middle	0.2	23.8	23.9	7.2	7.2	18.09	18.1	95.3	95.2	7.9	7.9	2.7	2.8	<2.5	<2.5
						23.9		7.2		18.11		95.1		2.9		<2.5			
9-Jul-08	Cloudy	Calm	12:10	Middle	0.2	24.0	24	7.2	7.2	18.19	18.2	95.9	95.8	8.1	8.1	6.8	6.9	<2.5	<2.5
						24.0		7.2		18.21		95.7		8.0		7.0		<2.5	
11-Jul-08	Sunny	Calm	12:26	Middle	0.2	23.9	23.9	7.4	7.4	18.09	18.1	96.4	96.3	8.1	8.1	7.0	7.1	15.0	15
						23.9		7.4		18.10		96.2		8.1		7.2		15.0	
14-Jul-08	Sunny	Calm	12:18	Middle	0.2	23.8	23.8	7.4	7.4	18.10	18.09	97.3	97.2	8.3	8.3	7.2	7.3	<2.5	<2.5
						23.8		7.4		18.08		97.1		8.3		7.4		<2.5	
16-Jul-08	Sunny	Calm	12:10	Middle	0.2	23.8	23.8	7.3	7.3	18.01	18.02	97.0	96.9	7.7	7.7	6.9	7	<2.5	<2.5
						23.8		7.3		18.03		96.8		7.6		7.1		<2.5	
18-Jul-08	Sunny	Calm	14:32	Middle	0.2	23.8	23.8	7.3	7.3	18.61	18.62	96.1	96	7.3	7.3	6.3	6.4	<2.5	<2.5
						23.8		7.3		18.63		95.9		7.2		6.5		<2.5	
21-Jul-08	Sunny	Calm	15:03	Middle	0.2	23.9	23.9	7.3	7.3	18.81	18.82	96.4	96.3	7.4	7.4	6.7	6.8	<2.5	<2.5
						23.9		7.3		18.83		96.2		7.4		6.9		<2.5	
23-Jul-08	Sunny	Calm	14:46	Middle	0.2	24.0	24	7.2	7.2	18.71	18.72	95.5	95.4	7.1	7.1	6.5	6.6	<2.5	<2.5
						24.0		7.2		18.72		95.3		7.1		6.7		<2.5	
25-Jul-08	Sunny	Calm	14:36	Middle	0.2	23.9	24	7.3	7.3	18.66	18.66	94.9	94.8	7.0	7	6.6	6.7	<2.5	<2.5
						24.0		7.3		18.65		94.7		7.0		6.8		<2.5	
28-Jul-08	Sunny	Calm	13:17	Middle	0.2	23.8	23.8	7.1	7.2	18.35	18.35	93.2	93.1	6.6	6.6	6.0	6.1	<2.5	<2.5
						23.8		7.2		18.34		93.0		6.6		6.2		<2.5	
30-Jul-08	Sunny	Calm	12:31	Middle	0.2	23.7	23.7	7.1	7.1	18.39	18.4	92.8	92.7	6.5	6.5	6.4	6.5	<2.5	<2.5
						23.7		7.1		18.40		92.6		6.4		6.6		<2.5	

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: \* Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher






## Water Quality Monitoring Results at TCS\_I

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
2-Jul-08	Sunny	Calm	11:30	Middle	0.2	22.6	22.6	7.3	7.4	0.02	0.02	92.2	92	8.1	8.1	2.0	2	<2.5	<2.5
						22.6		7.4		0.02		91.8		8.1		2.0			
4-Jul-08	Sunny	Calm	14:04	Middle	0.2	22.7	22.7	7.3	7.3	0.02	0.02	92.4	92.2	8.1	8.1	1.9	1.9	<2.5	<2.5
						22.7		7.3		0.02		92.0		8.1		1.9			
7-Jul-08	Sunny	Calm	11:31	Middle	0.2	22.6	22.6	7.3	7.3	0.02	0.02	91.5	91.3	7.9	7.9	1.7	1.7	<2.5	<2.5
						22.6		7.3		0.02		91.1		7.9		1.7			
9-Jul-08	Cloudy	Calm	11:52	Middle	0.2	22.7	22.7	7.3	7.3	0.02	0.02	92.1	91.9	8.0	8	1.8	1.8	<2.5	<2.5
						22.7		7.3		0.02		91.7		8.0		1.8			
11-Jul-08	Sunny	Calm	12:09	Middle	0.2	22.6	22.6	7.4	7.4	0.02	0.02	92.6	92.4	8.0	8	2.0	2	<2.5	<2.5
						22.6		7.4		0.02		92.2		8.0		2.0			
14-Jul-08	Sunny	Calm	12:00	Middle	0.2	22.6	22.6	7.5	7.5	0.02	0.02	93.5	93.3	8.2	8.2	2.2	2.2	<2.5	<2.5
						22.6		7.5		0.02		93.1		8.2		2.2			
16-Jul-08	Sunny	Calm	11:52	Middle	0.2	22.5	22.5	7.4	7.4	0.02	0.02	93.2	93	7.6	7.6	1.9	1.9	<2.5	<2.5
						22.5		7.4		0.02		92.8		7.6		1.9			
18-Jul-08	Sunny	Calm	14:15	Middle	0.2	22.6	22.6	7.3	7.3	0.02	0.02	92.3	92.1	7.2	7.2	1.7	1.7	<2.5	<2.5
						22.6		7.3		0.02		91.9		7.2		1.7			
21-Jul-08	Sunny	Calm	14:45	Middle	0.2	22.6	22.6	7.3	7.4	0.02	0.02	92.6	92.4	7.3	7.3	1.9	1.9	<2.5	<2.5
						22.6		7.4		0.02		92.2		7.3		1.9			
23-Jul-08	Sunny	Calm	14:28	Middle	0.2	22.7	22.7	7.3	7.3	0.02	0.02	91.7	91.5	7.1	7.1	1.8	1.8	<2.5	<2.5
						22.7		7.3		0.02		91.3		7.0		1.8			
25-Jul-08	Sunny	Calm	14:19	Middle	0.2	22.7	22.7	7.3	7.3	0.02	0.02	91.1	90.9	6.9	6.9	1.9	1.9	<2.5	<2.5
						22.7		7.3		0.02		90.7		6.9		1.9			
28-Jul-08	Sunny	Calm	12:59	Middle	0.2	22.5	22.6	7.2	7.2	0.02	0.02	89.4	89.2	6.5	6.5	1.6	1.6	<2.5	<2.5
						22.6		7.2		0.02		89.0		6.5		1.6			
30-Jul-08	Sunny	Calm	12:13	Middle	0.2	22.5	22.5	7.1	7.2	0.02	0.02	89.0	88.8	6.4	6.4	1.8	1.8	<2.5	<2.5
						22.5		7.2		0.02		88.6		6.4		1.8			

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: \* Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher




## Dissolved Oxygen

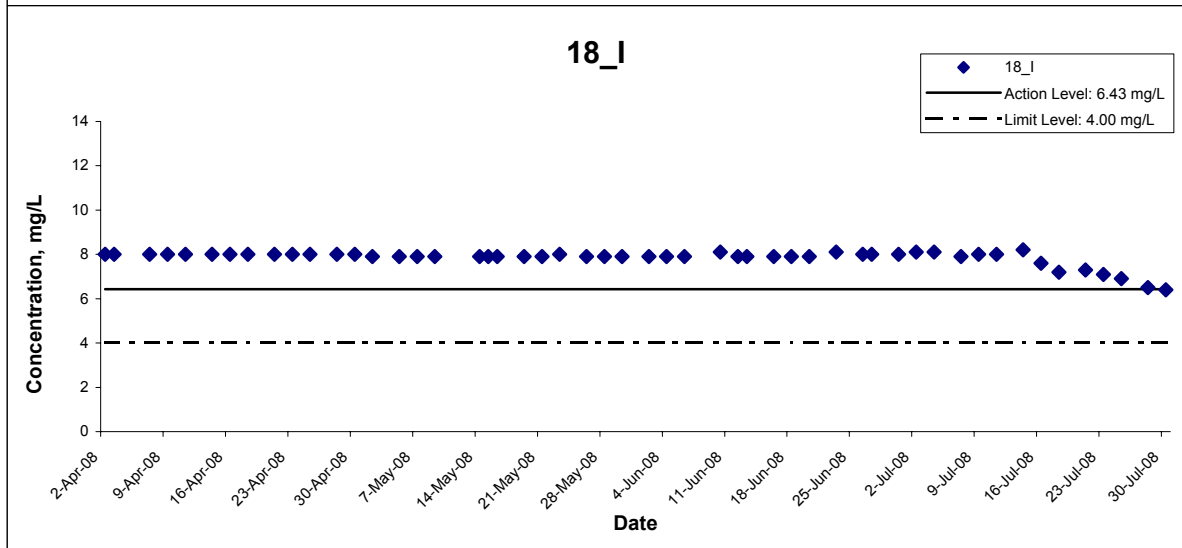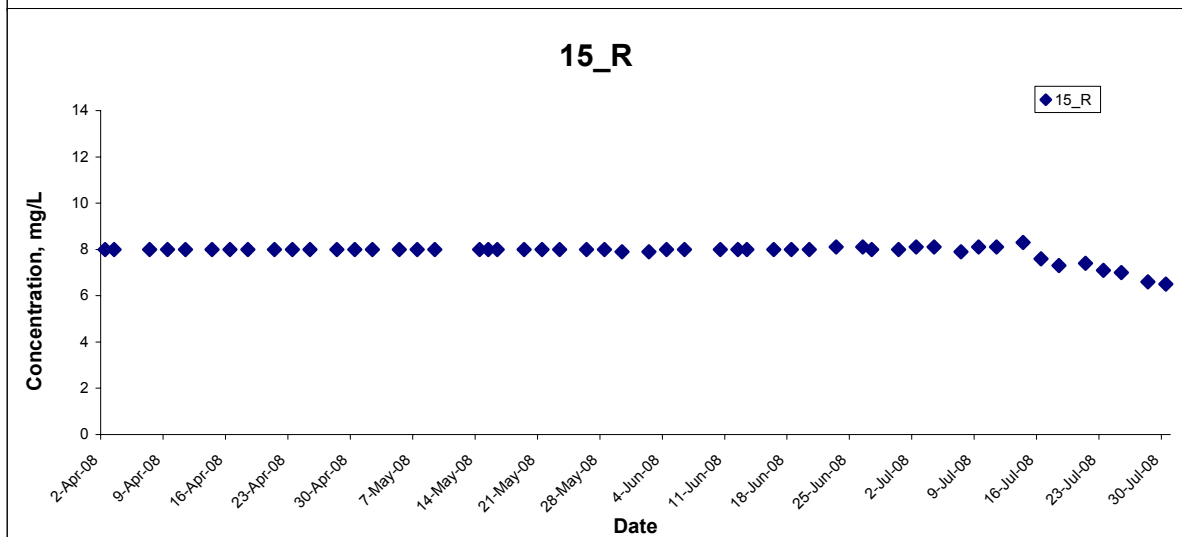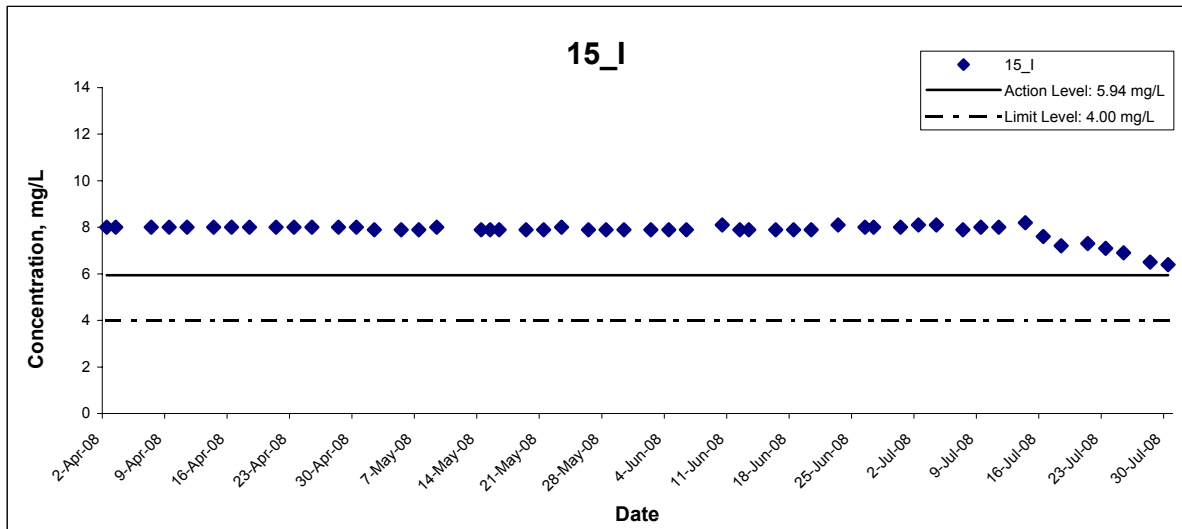

Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha <b>Graphical Presentation of Water Quality Monitoring Results</b>	Scale	N.T.S	Project No.	MA6030
	Date	Jul 08	Appendix	F




## Dissolved Oxygen

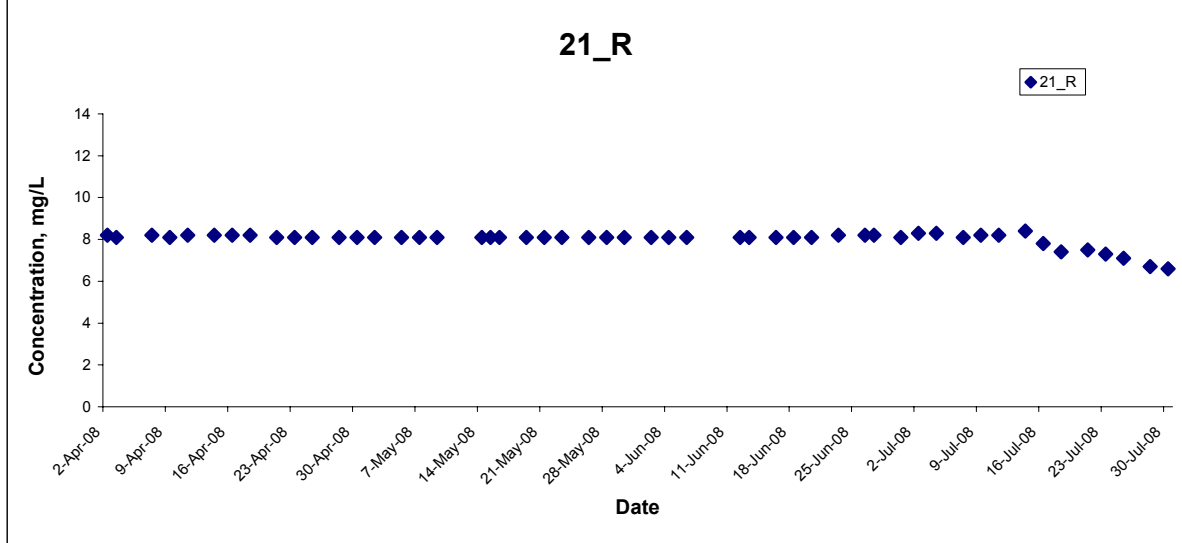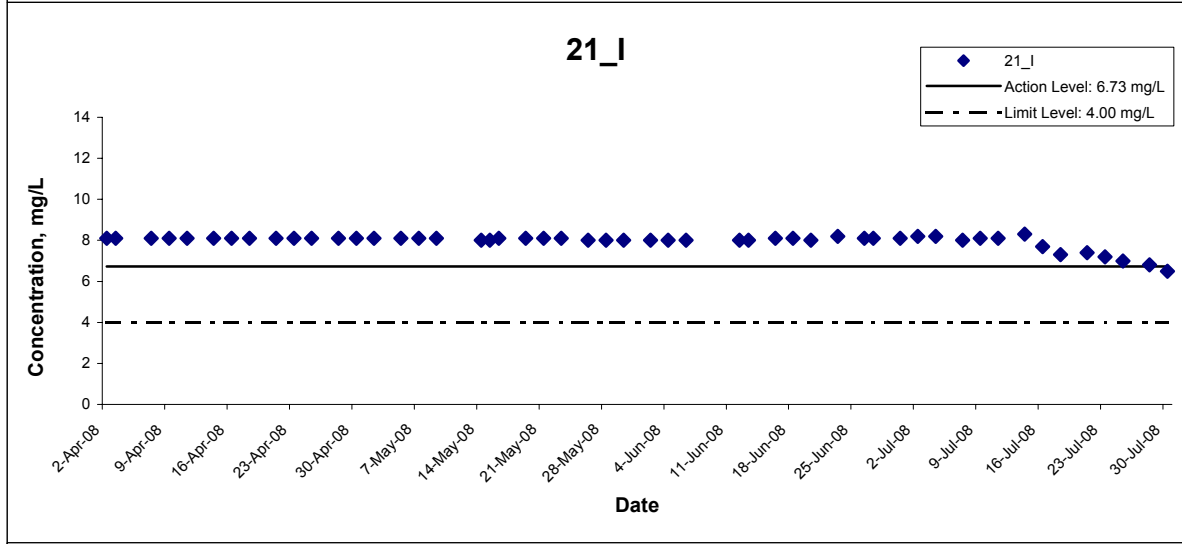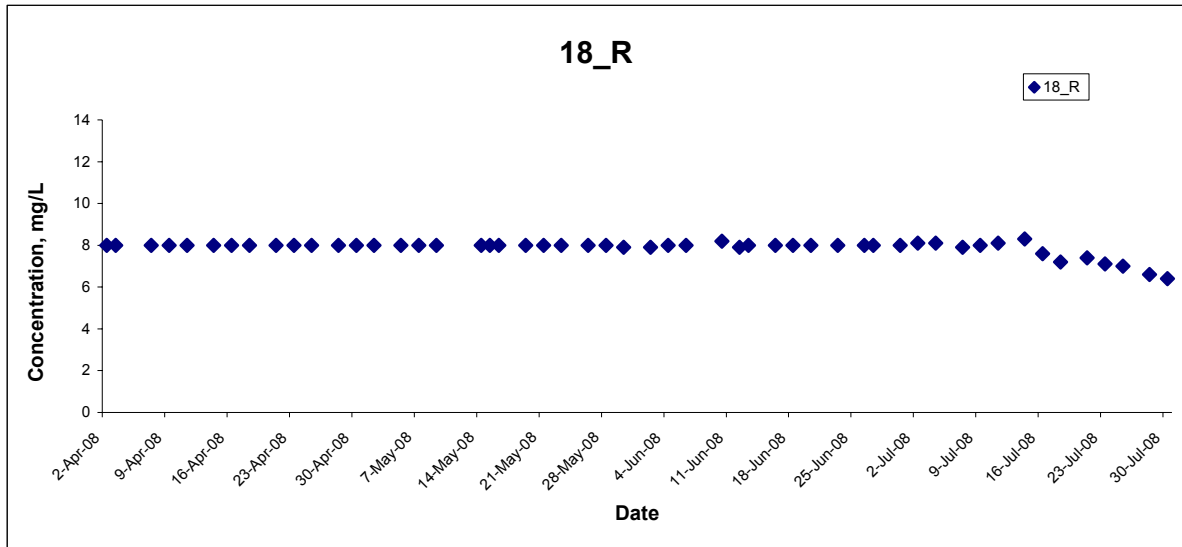




Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale N.T.S	Project No. MA6030	<b>CINOTECH</b>
	Date Jul 08	Appendix F	

## Dissolved Oxygen

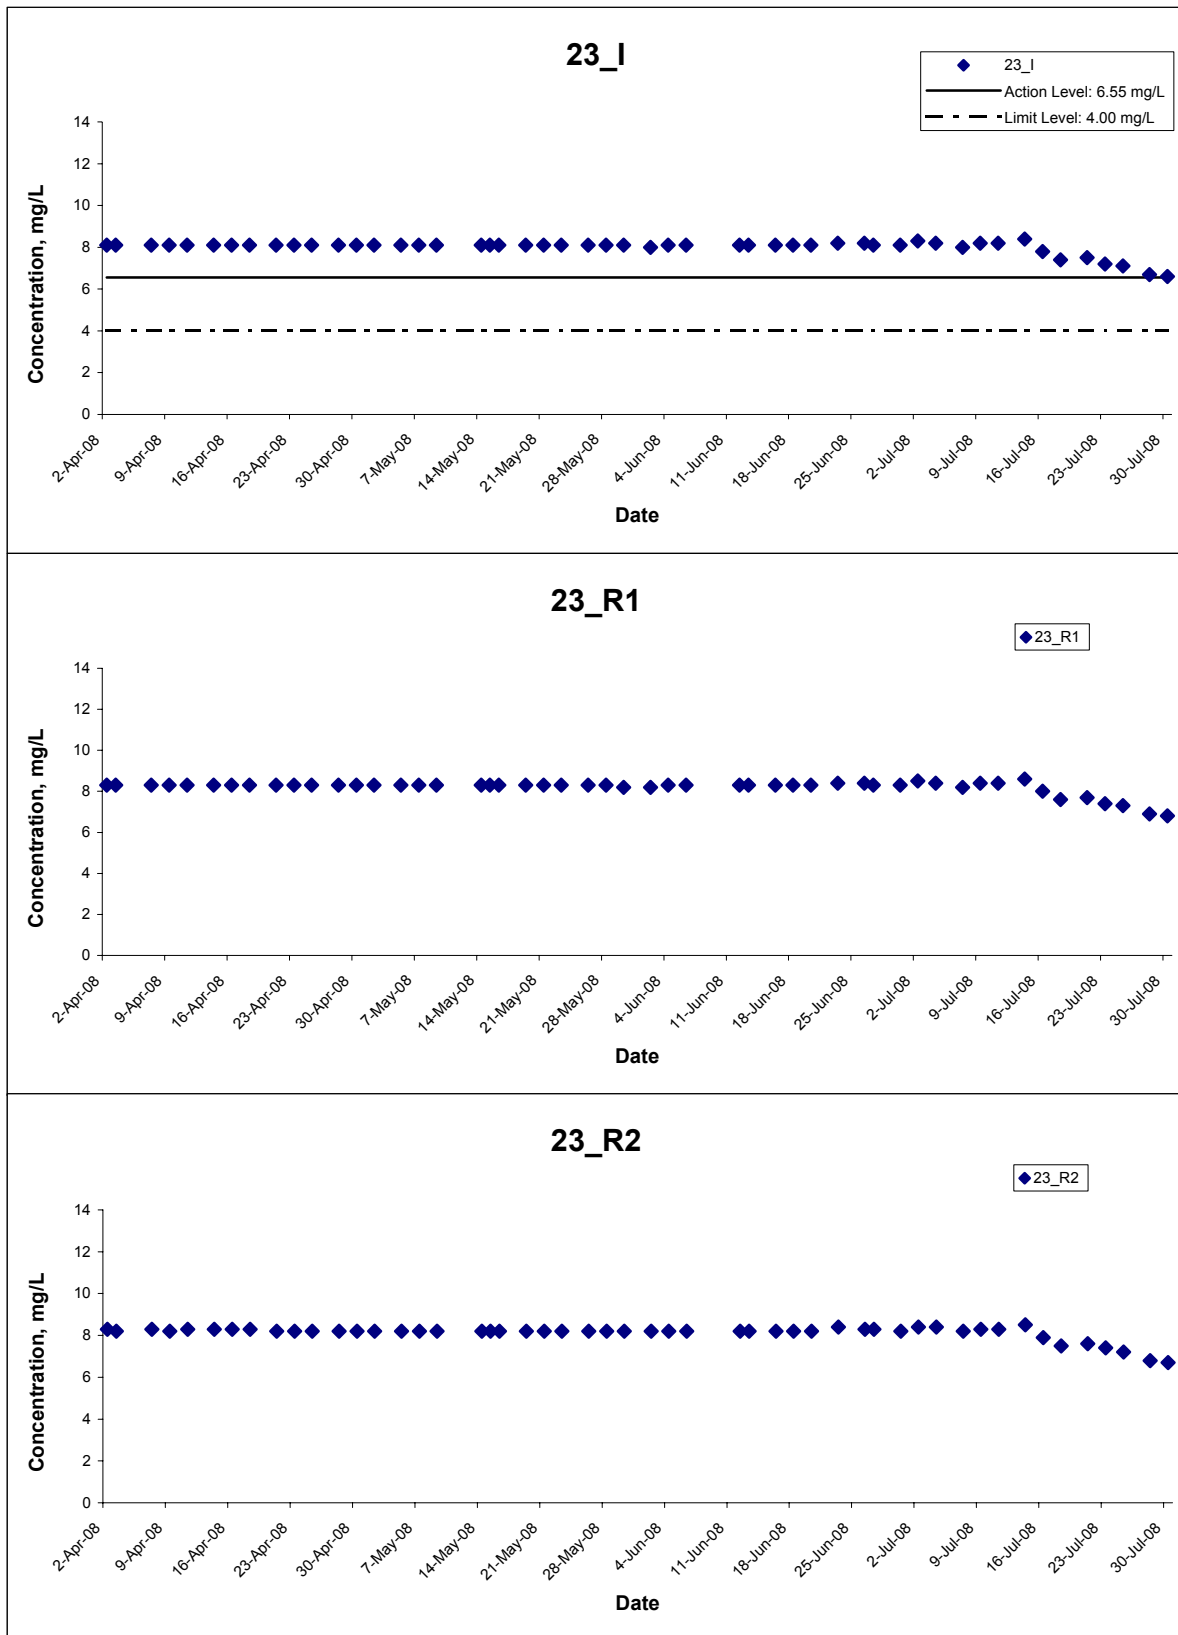




Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale	N.T.S	Project No. MA6030	CINOTECH
	Date	Jul 08	Appendix F	

## Dissolved Oxygen

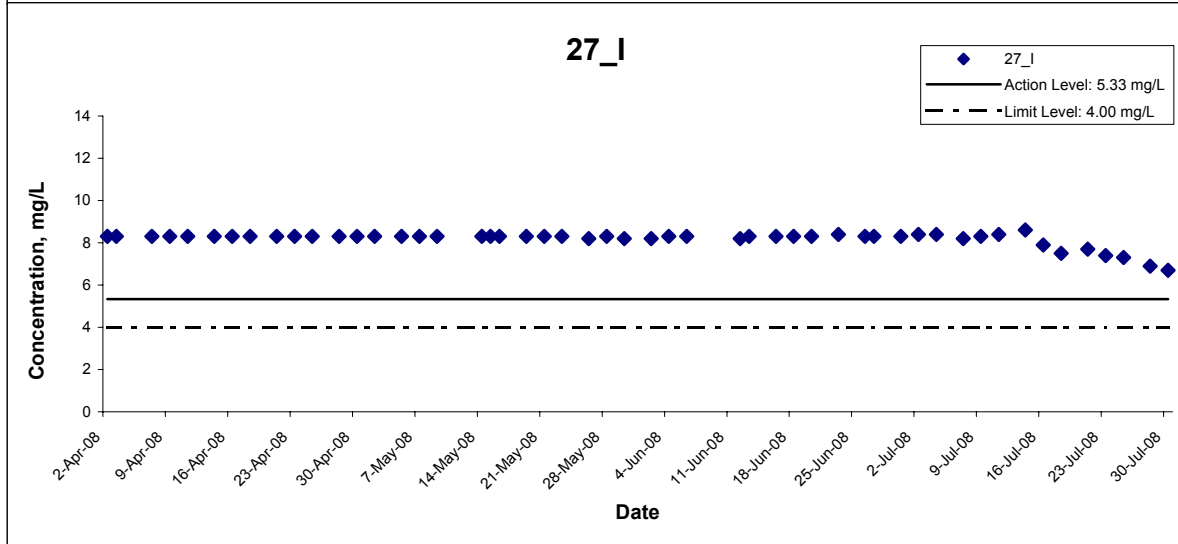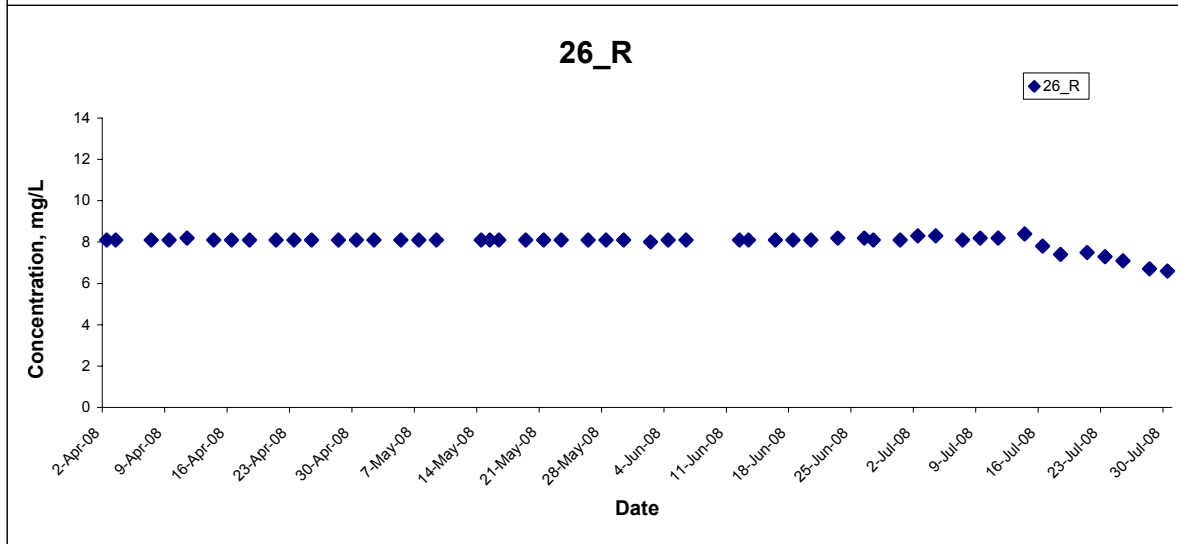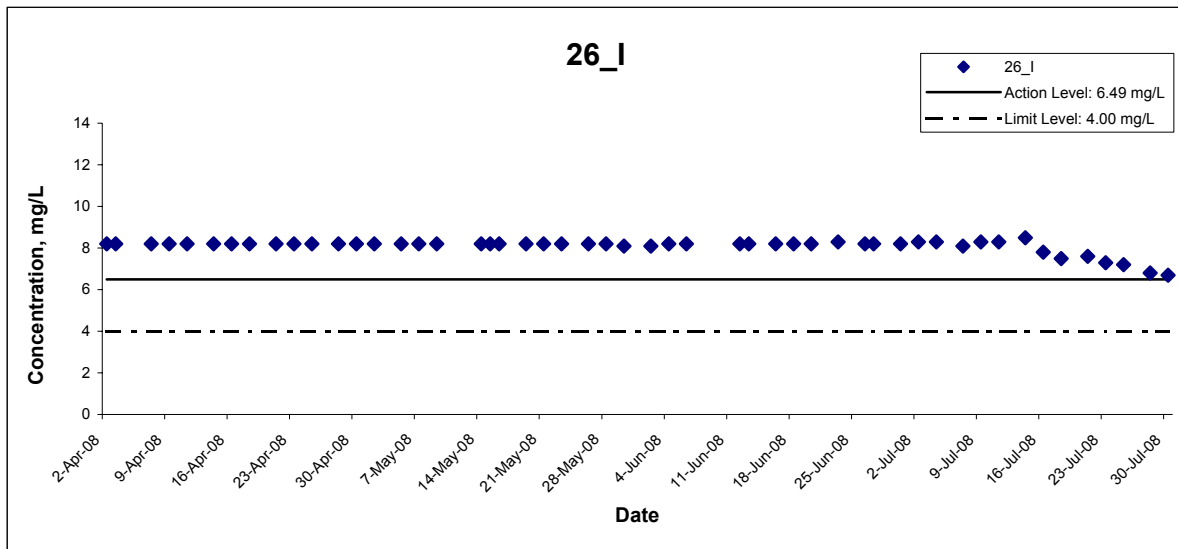




Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale N.T.S	Project No. MA6030	
	Date Jul 08	Appendix F	

## Dissolved Oxygen

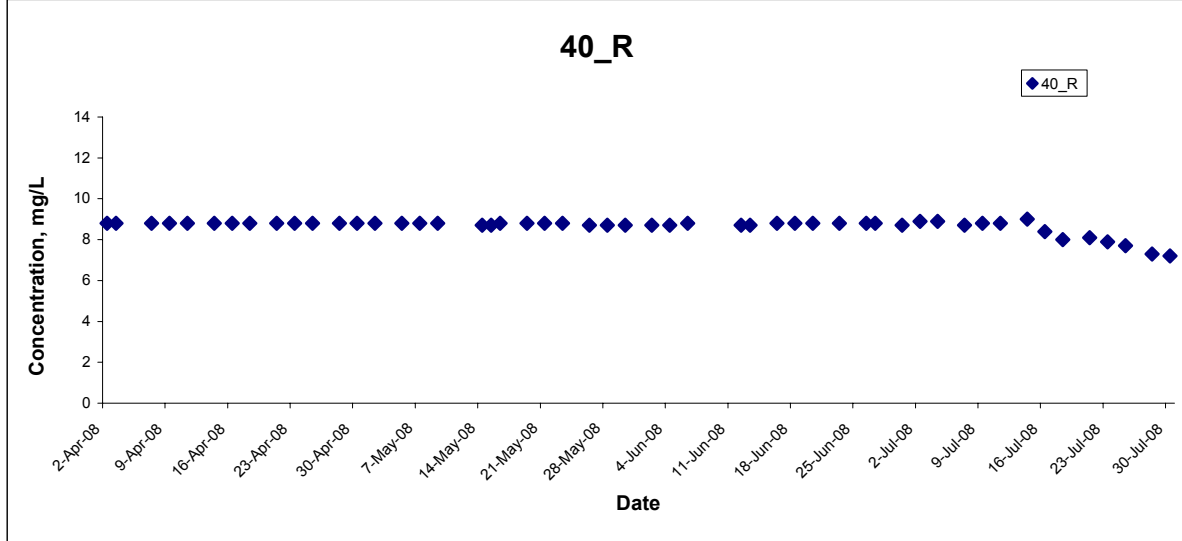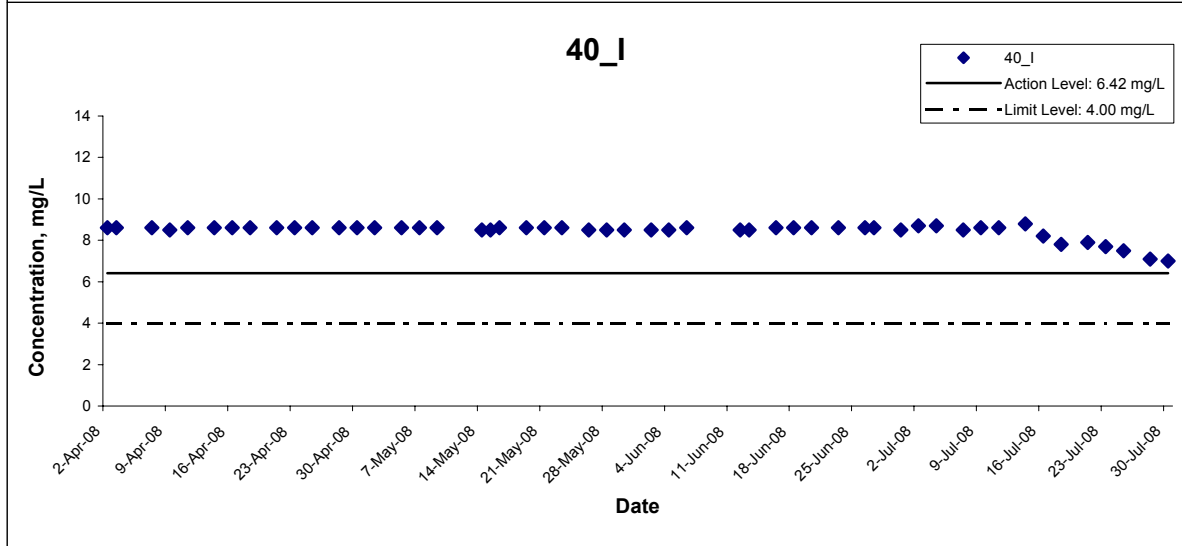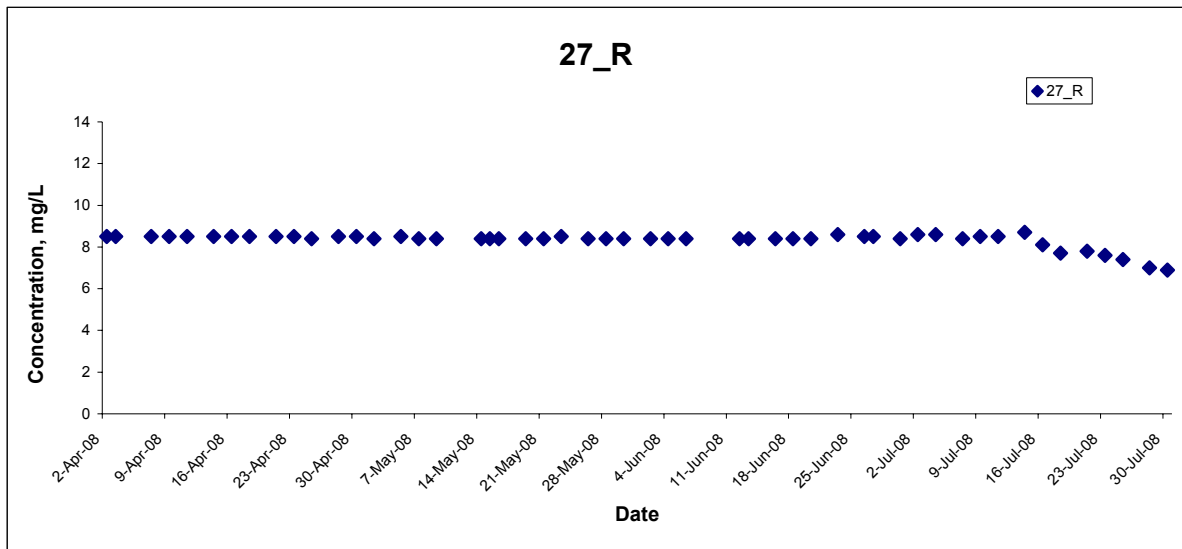


Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale N.T.S	Project No. MA6030	
	Date Jul 08	Appendix F	

## Dissolved Oxygen

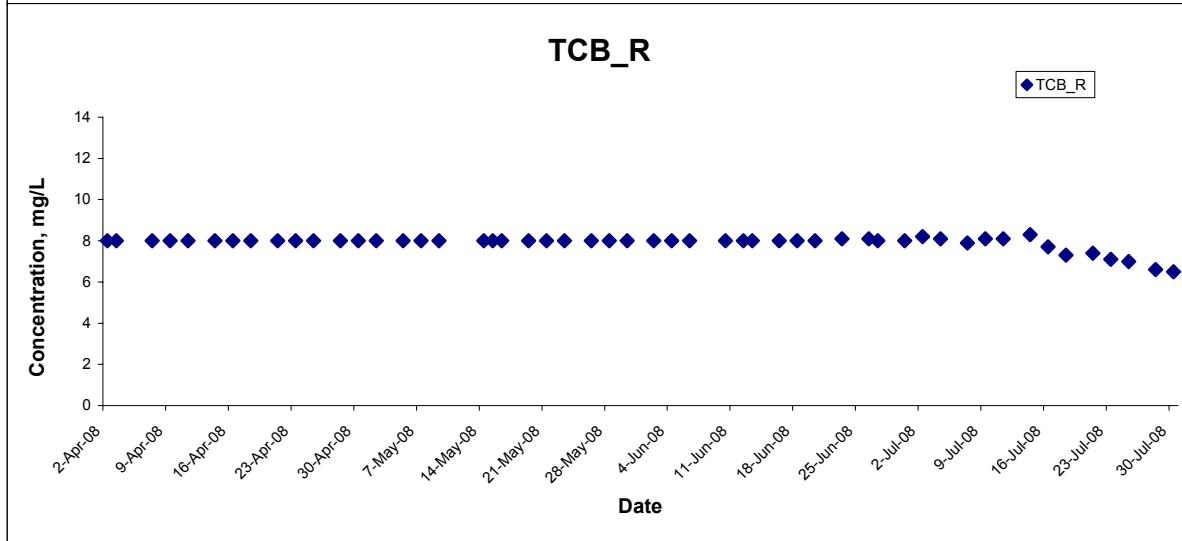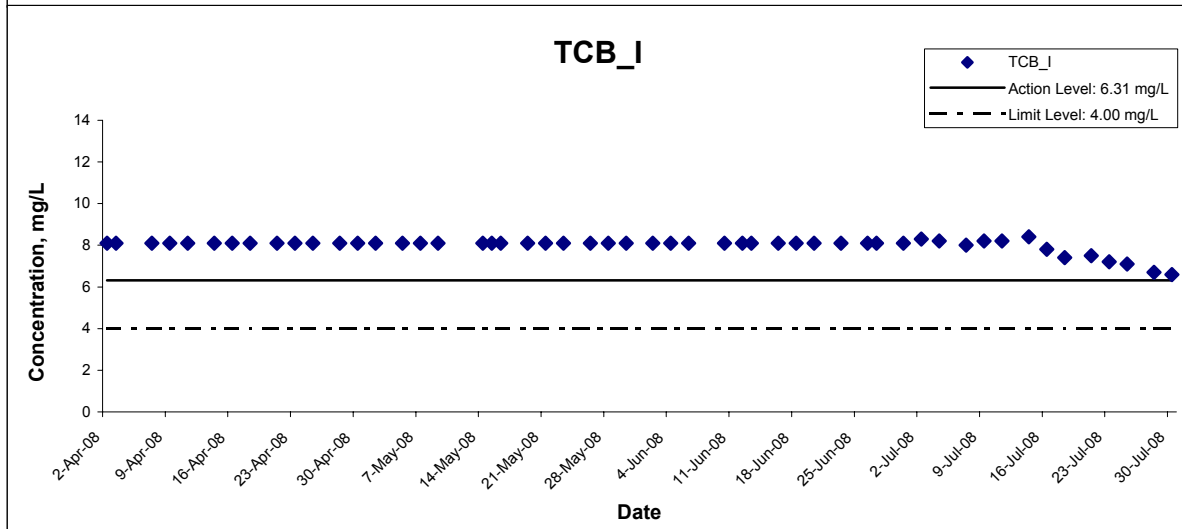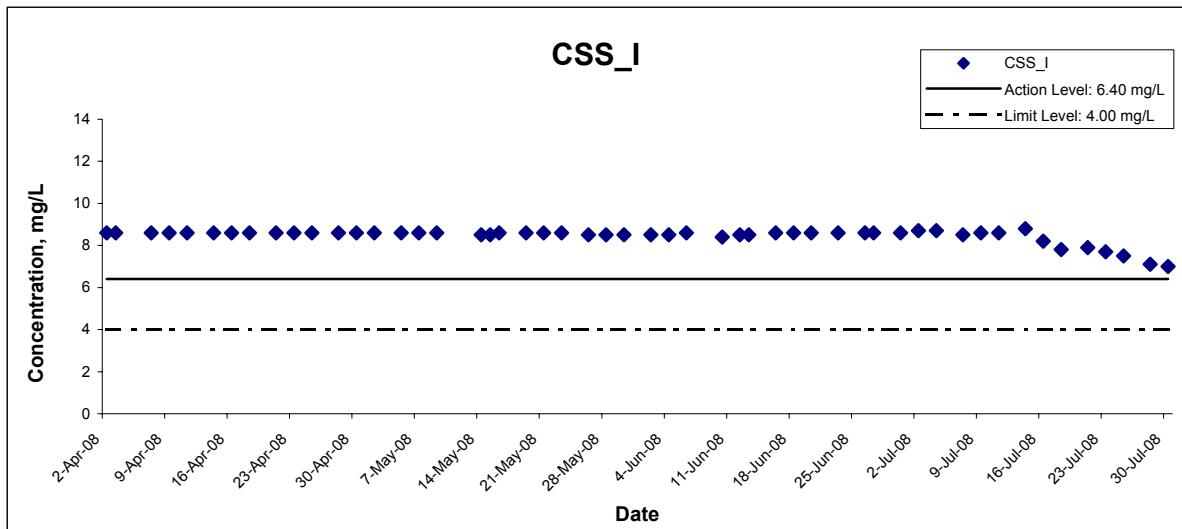

Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale N.T.S	Project No. MA6030	
	Date Jul 08	Appendix F	


## Dissolved Oxygen

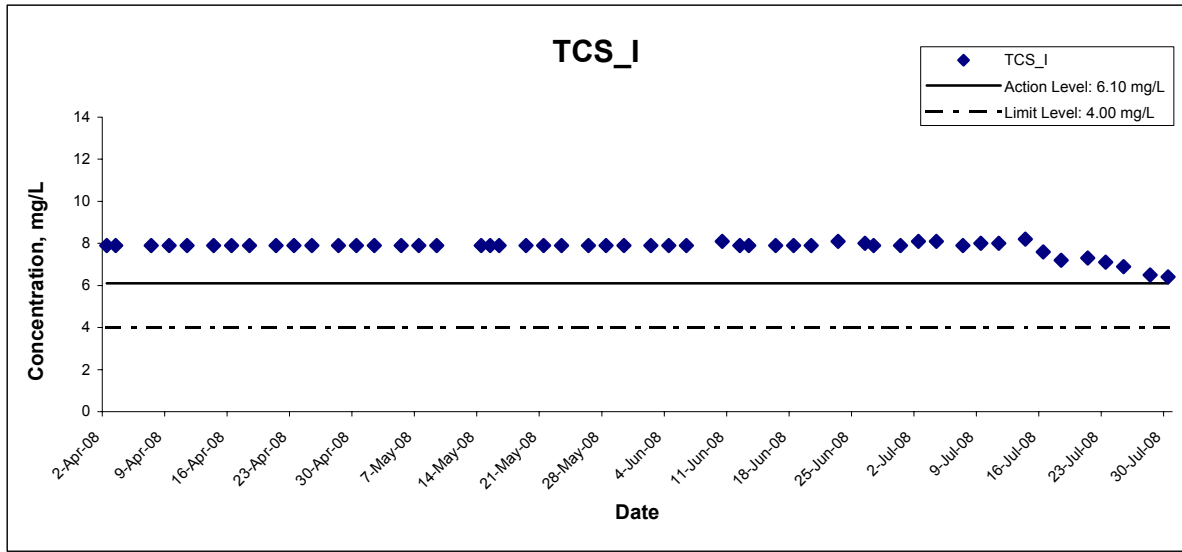

Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale N.T.S	Project No. MA6030	<b>CINOTECH</b>
	Date Jul 08	Appendix F	






## Turbidity

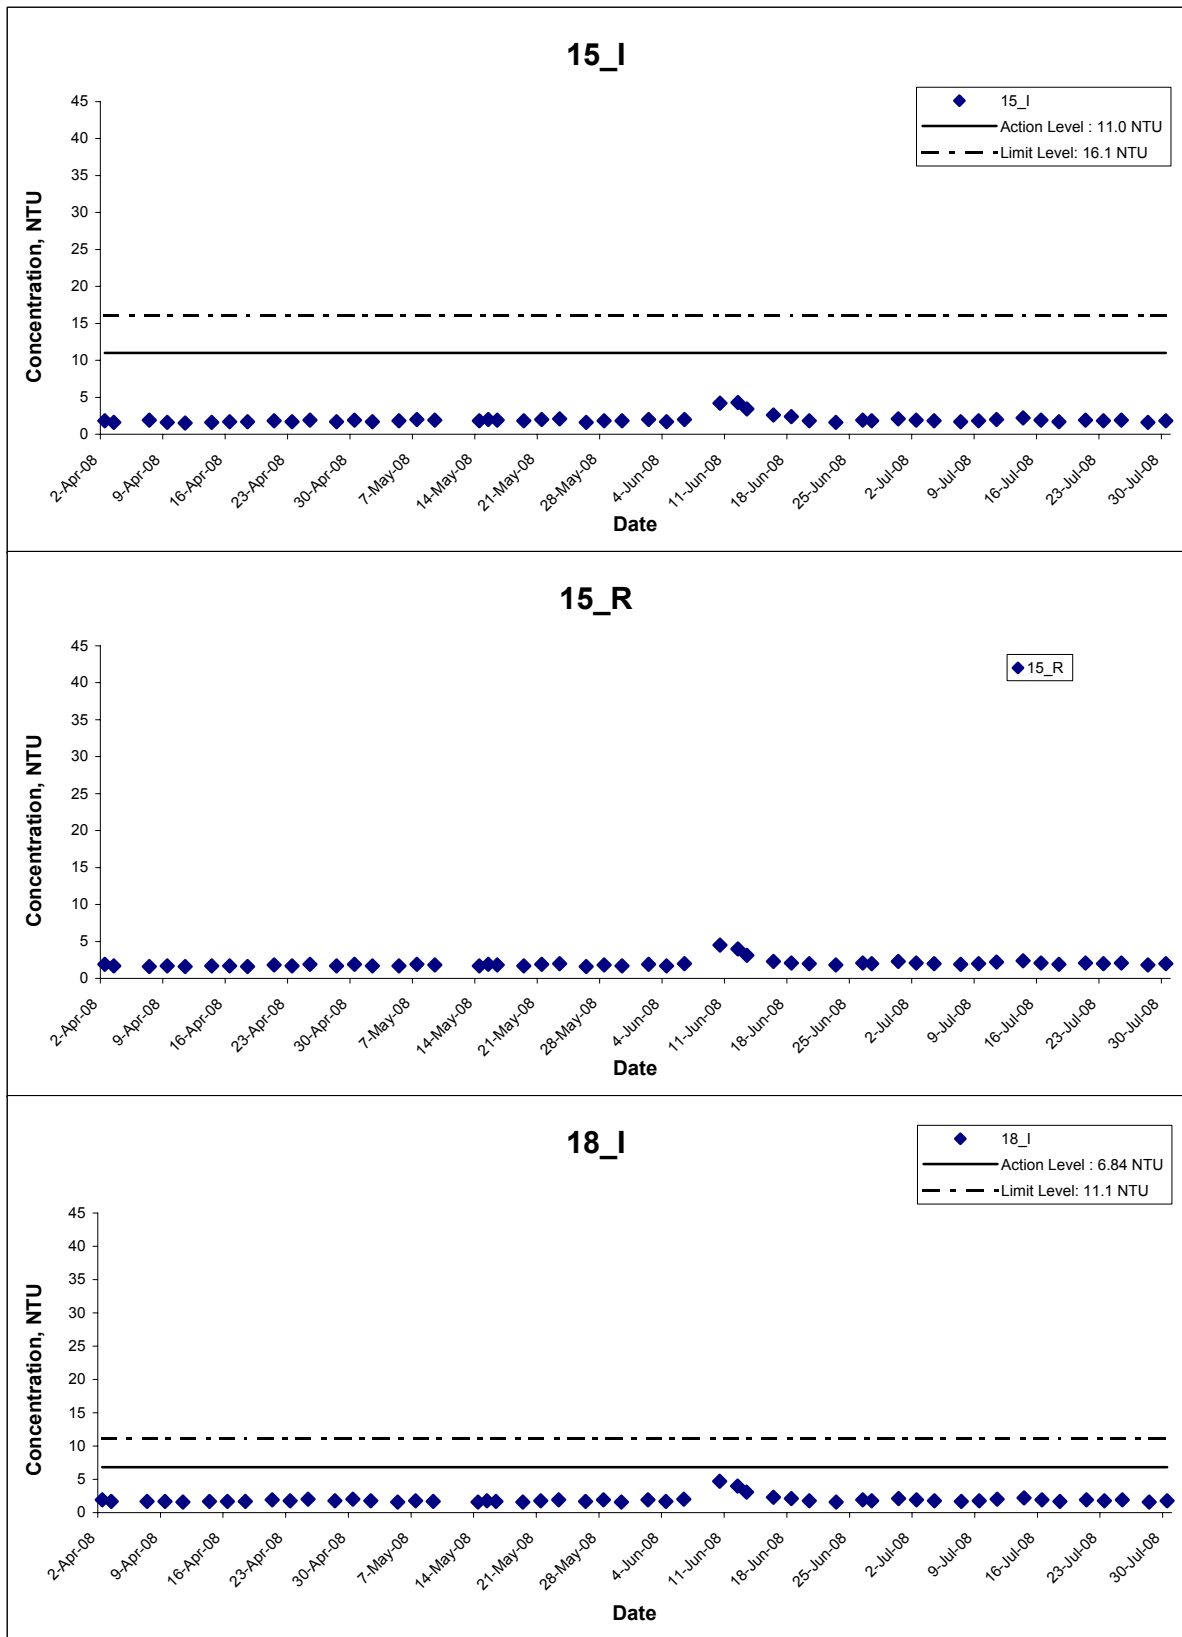


Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale N.T.S	Project No. MA6030	<b>CINOTECH</b>
	Date Jul 08	Appendix F	

## Turbidity

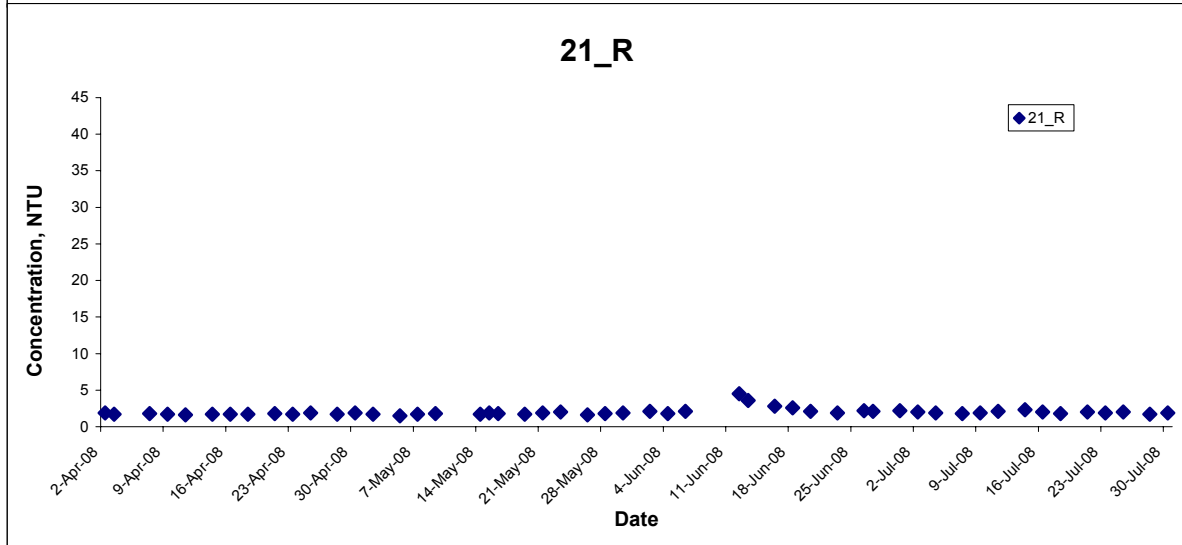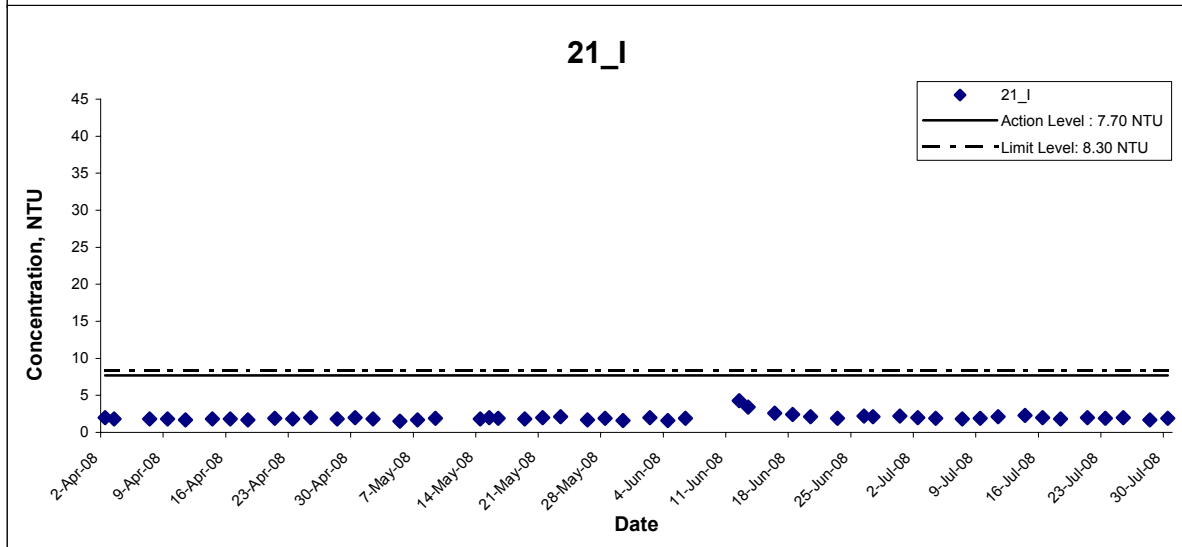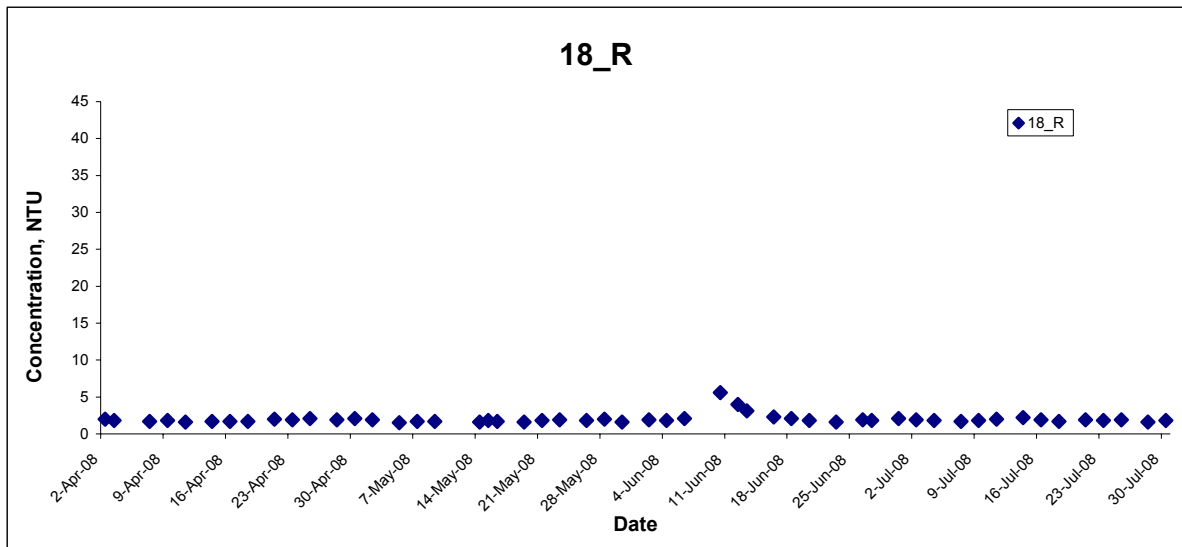




Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale N.T.S	Project No. MA6030	
	Date Jul 08	Appendix F	

## Turbidity

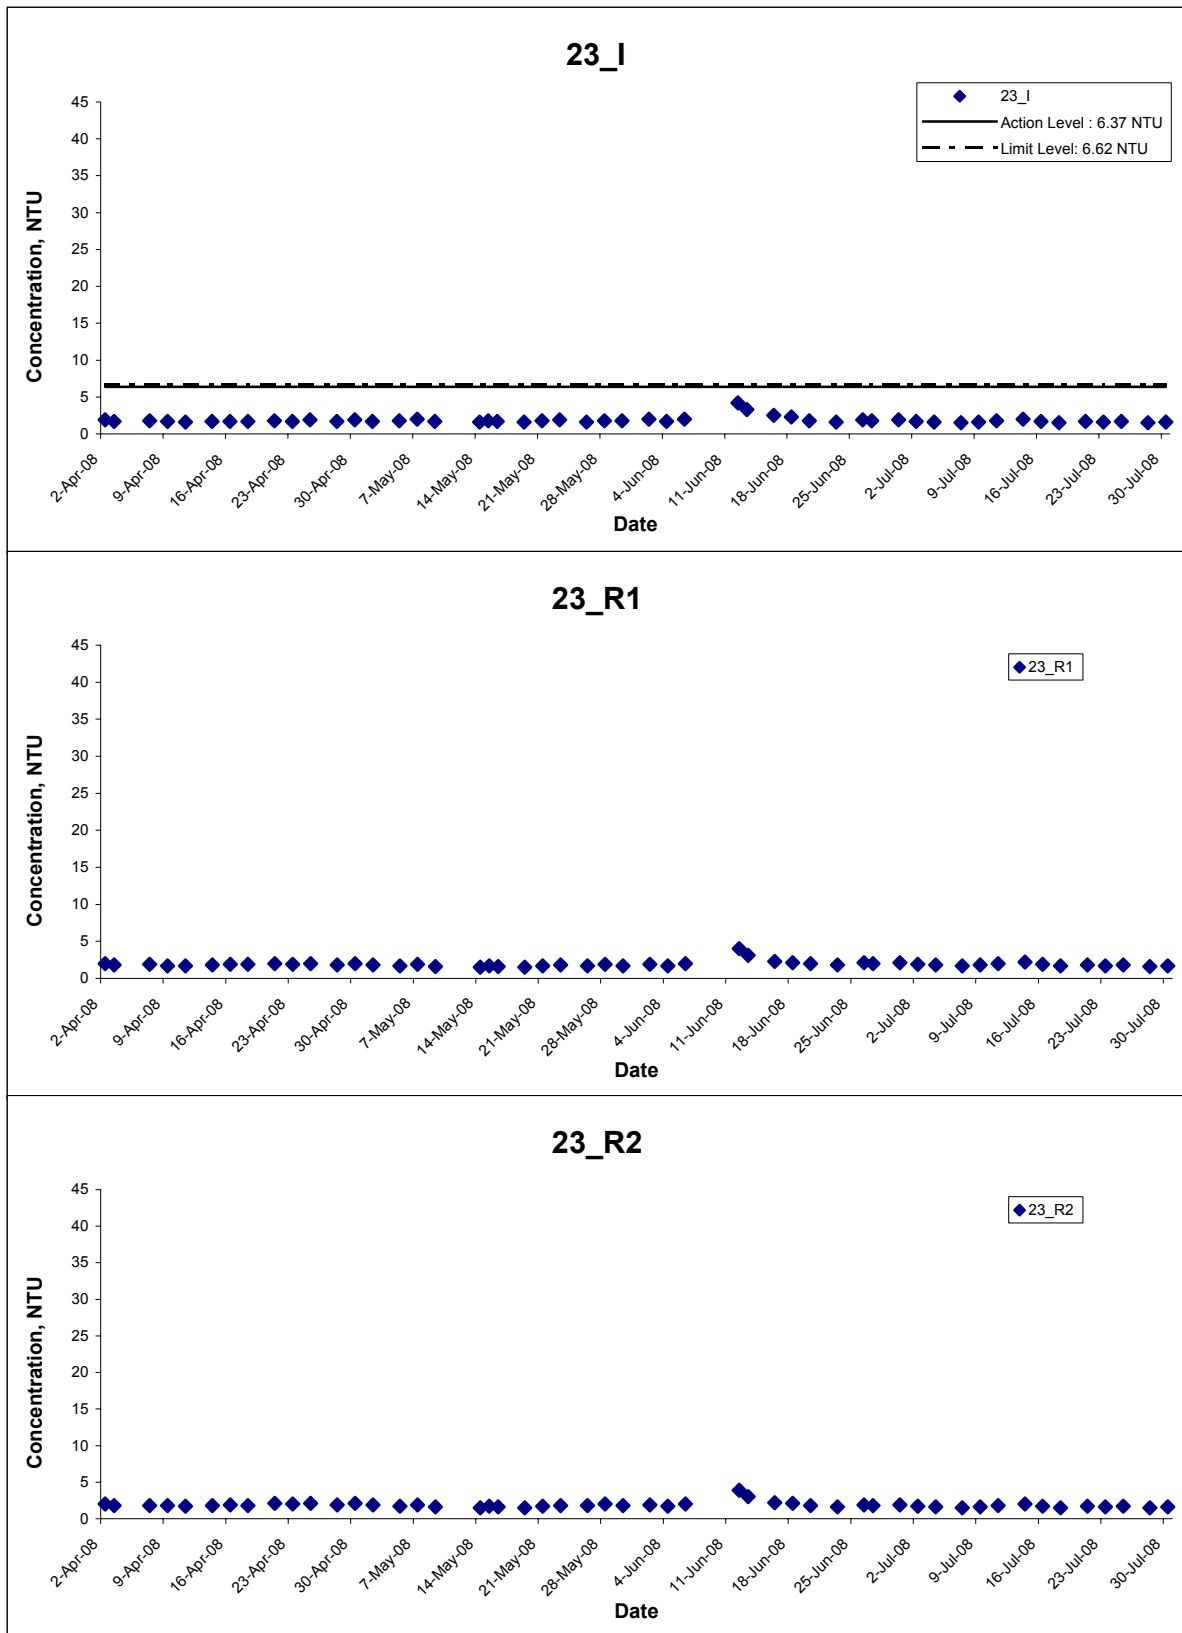




Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha <b>Graphical Presentation of Water Quality Monitoring Results</b>	Scale N.T.S	Project No. MA6030	CINOTECH
	Date Jul 08	Appendix F	

## Turbidity

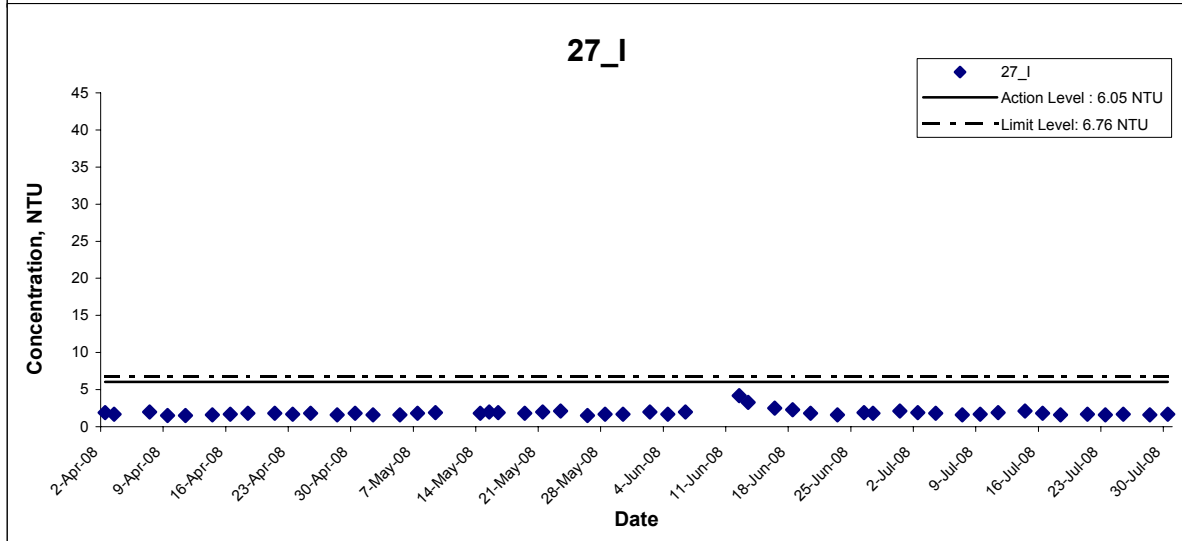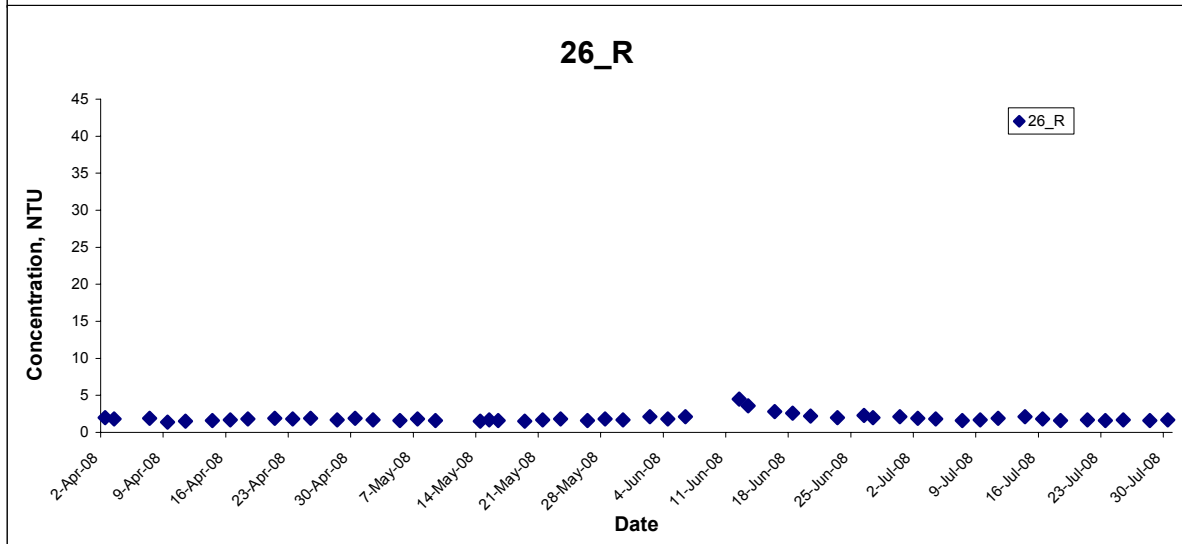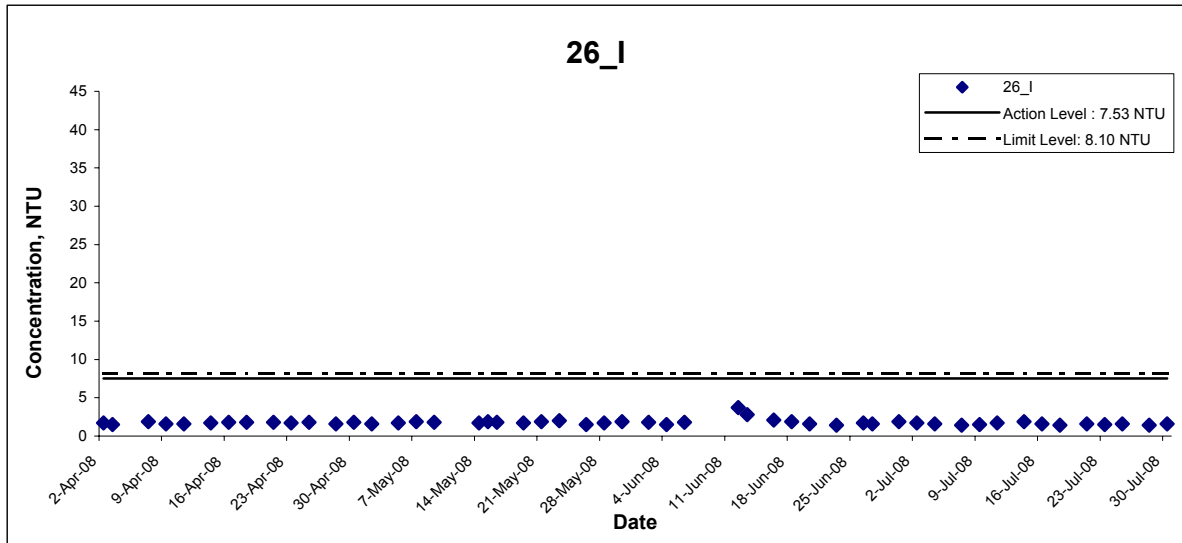




Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale	N.T.S	Project No. MA6030	
	Date	Jul 08	Appendix	

## Turbidity

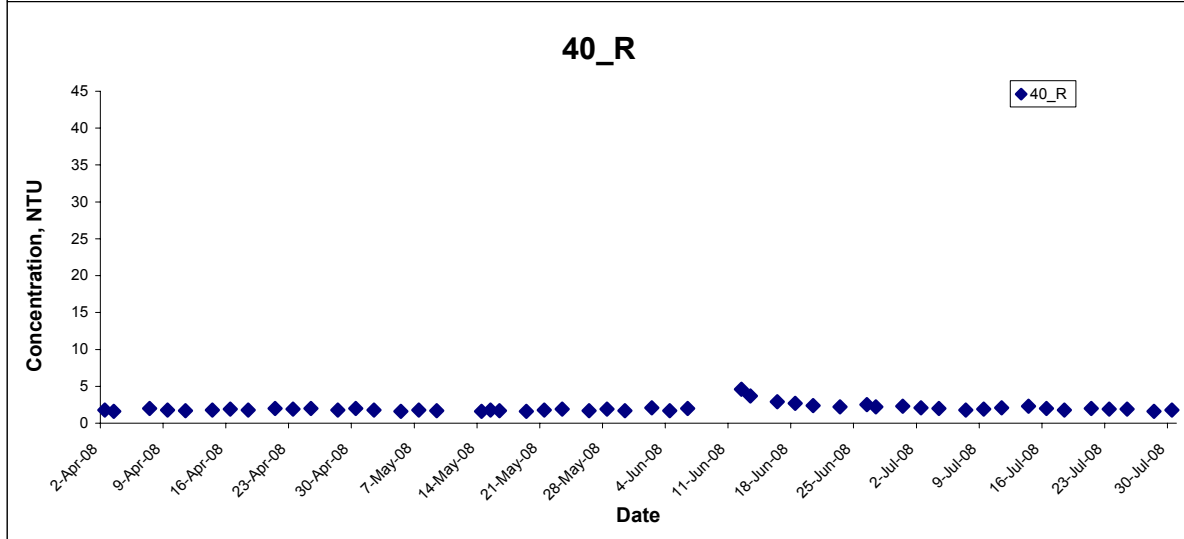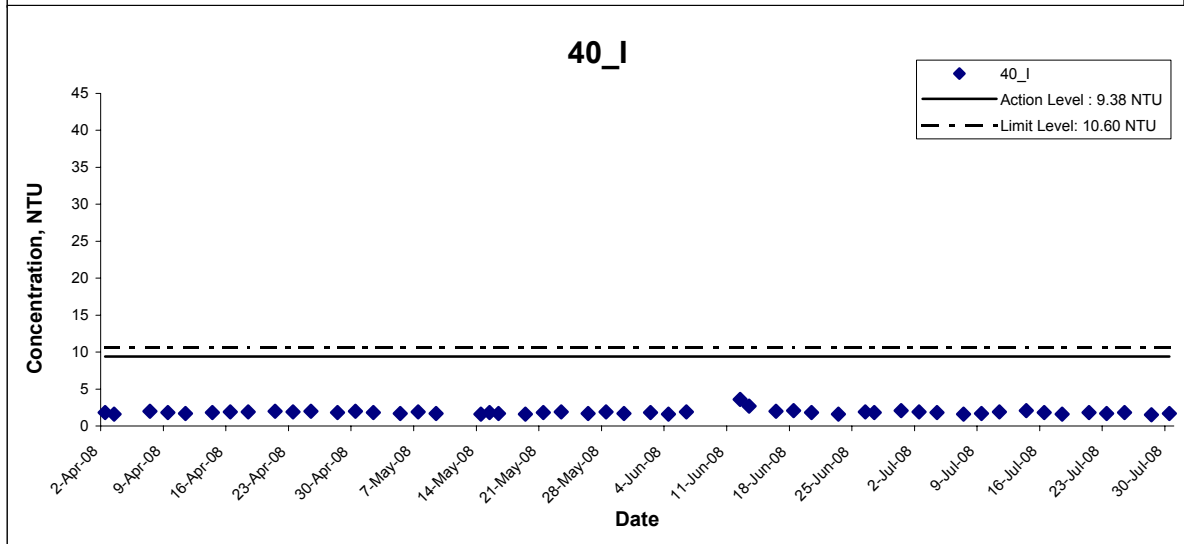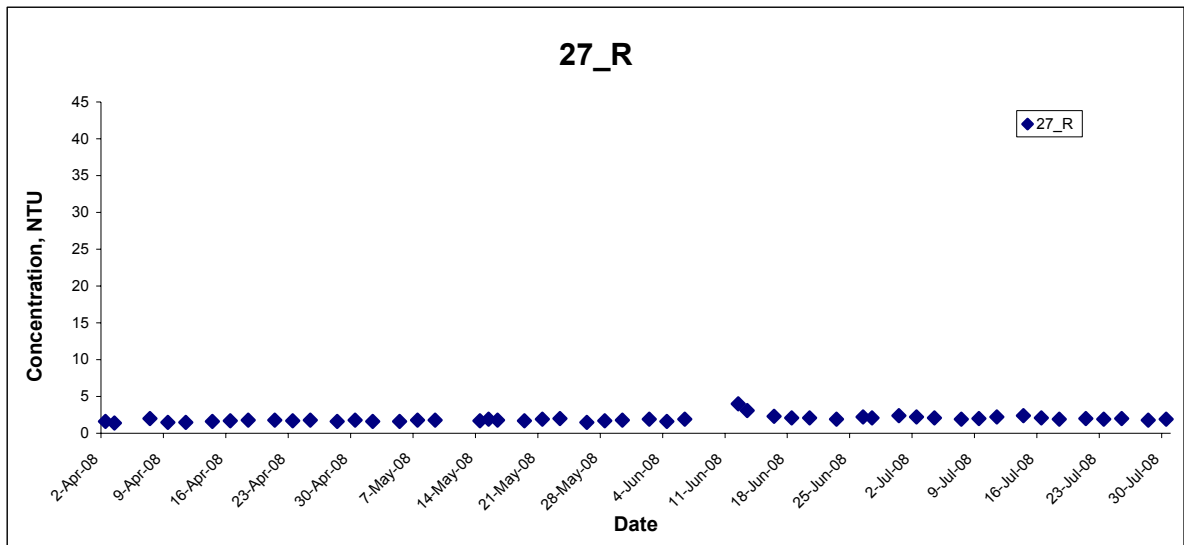


Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha <b>Graphical Presentation of Water Quality Monitoring Results</b>	Scale N.T.S	Project No. MA6030	CINOTECH
	Date Jul 08	Appendix F	

## Turbidity

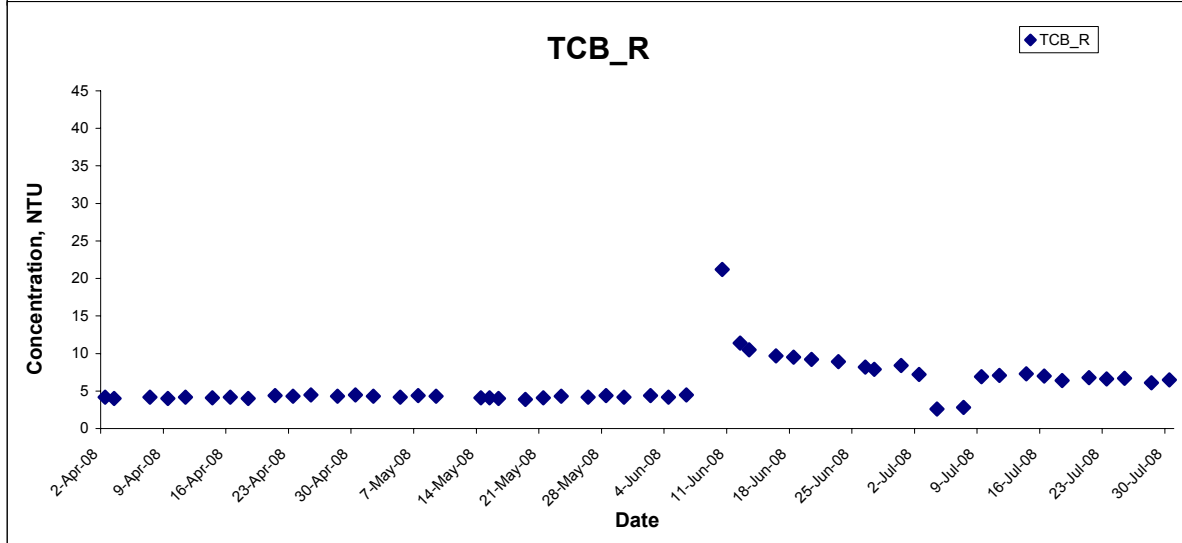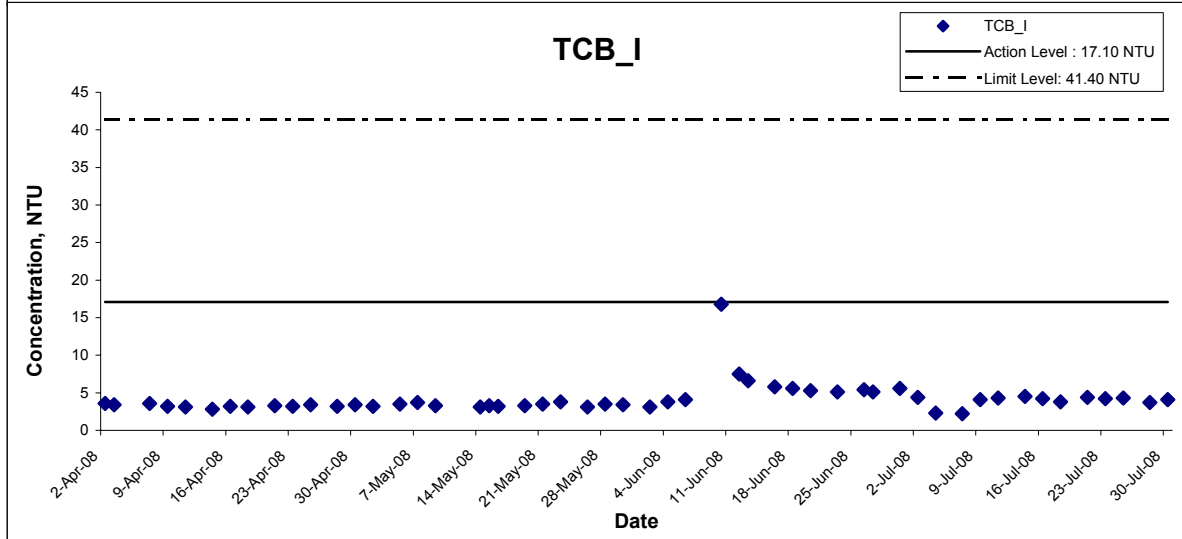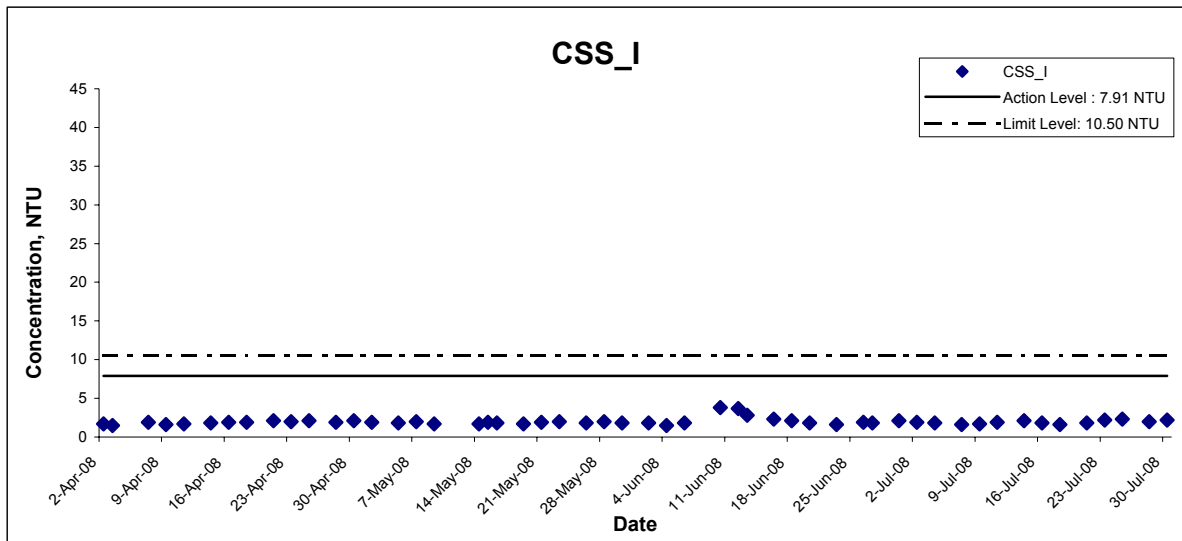




Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale N.T.S	Project No. MA6030	
	Date Jul 08	Appendix F	

## Turbidity

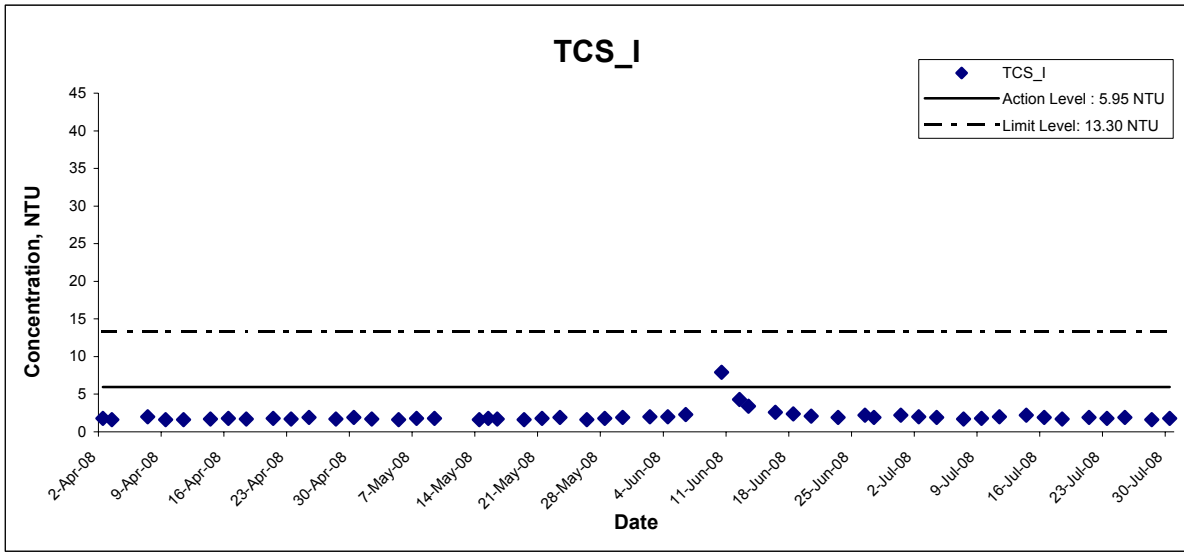

Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale N.T.S	Project No. MA6030	<b>CINOTECH</b>
	Date Jul 08	Appendix F	




## Suspended Solids

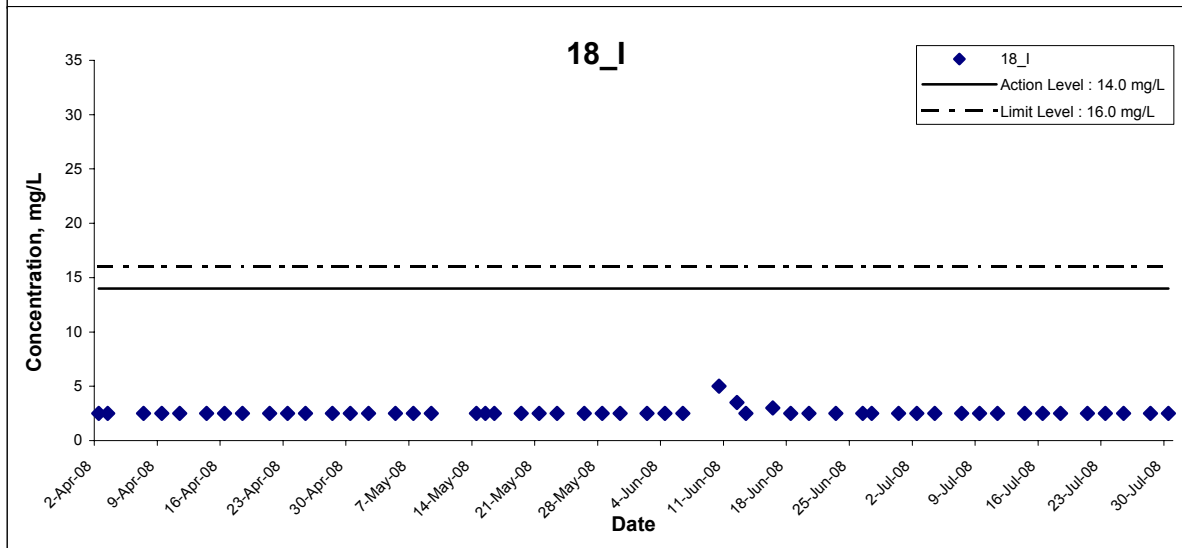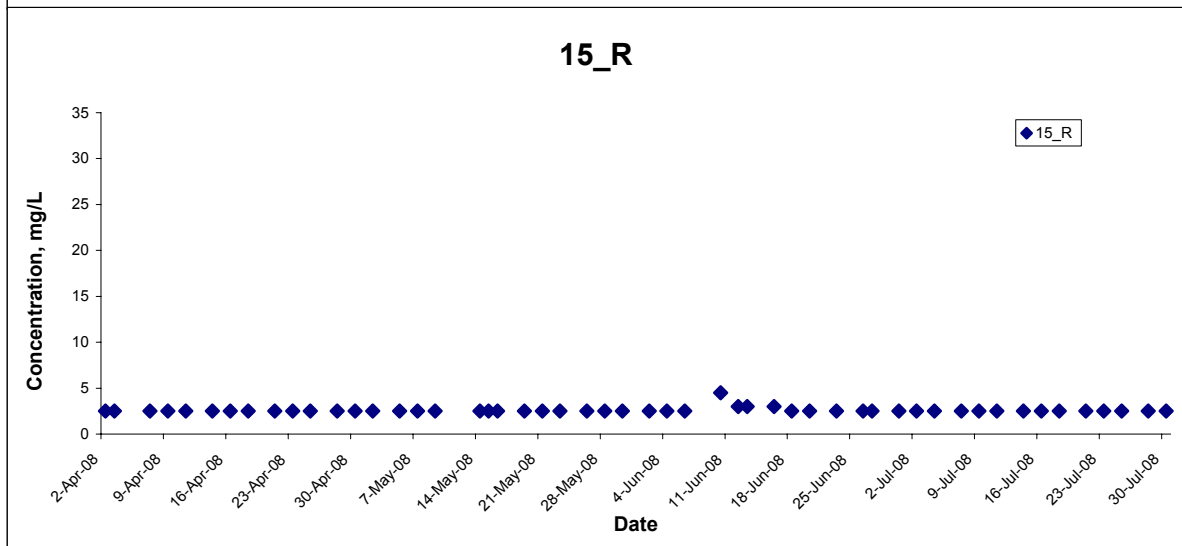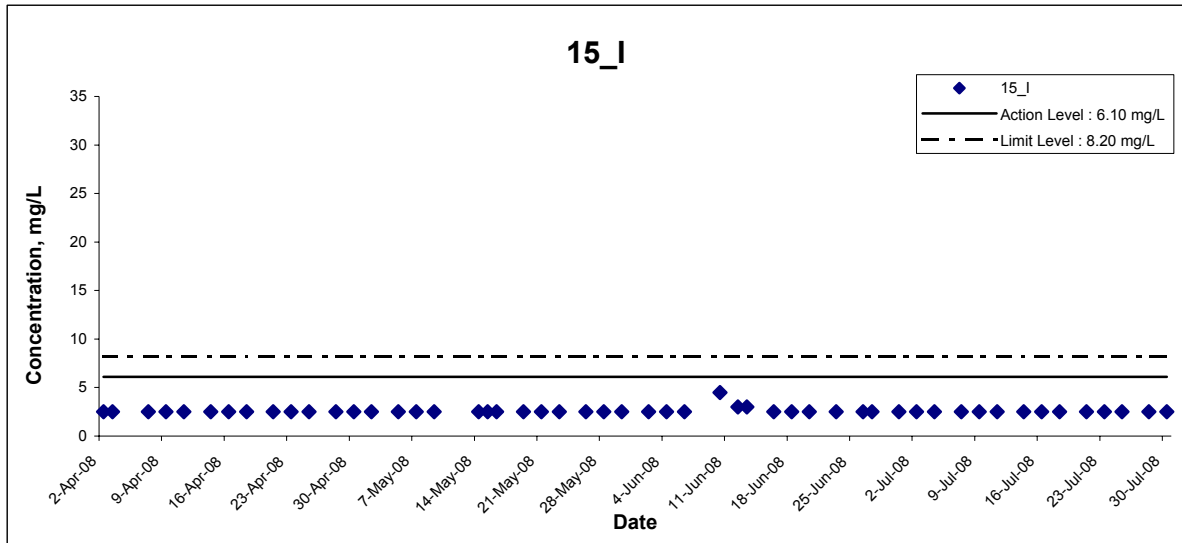

Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale	N.T.S	Project No. MA6030	CINOTECH
	Date	Jul 08	Appendix F	






## Suspended Solids

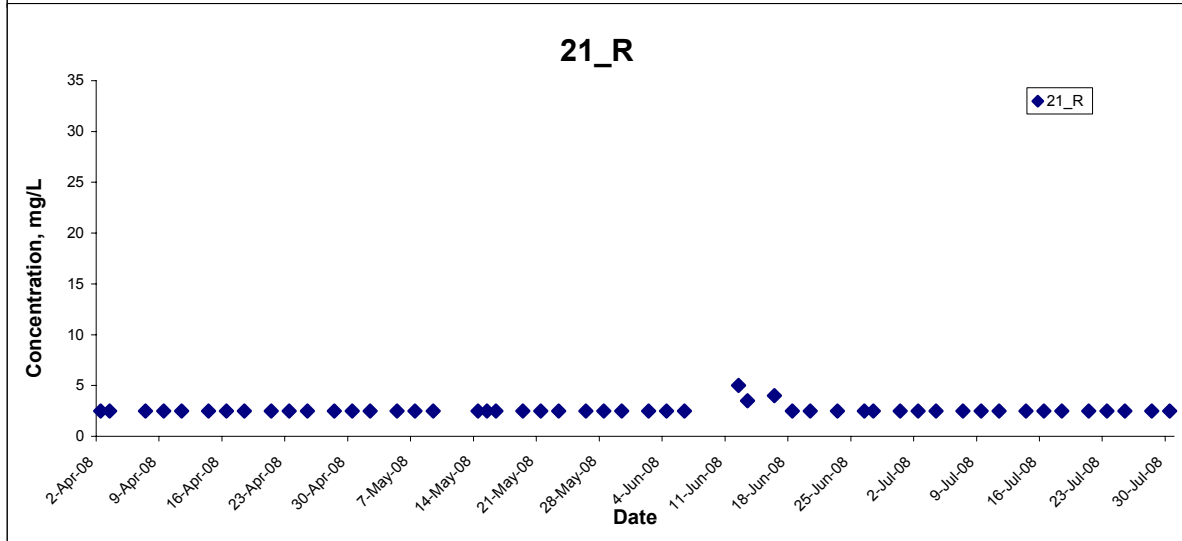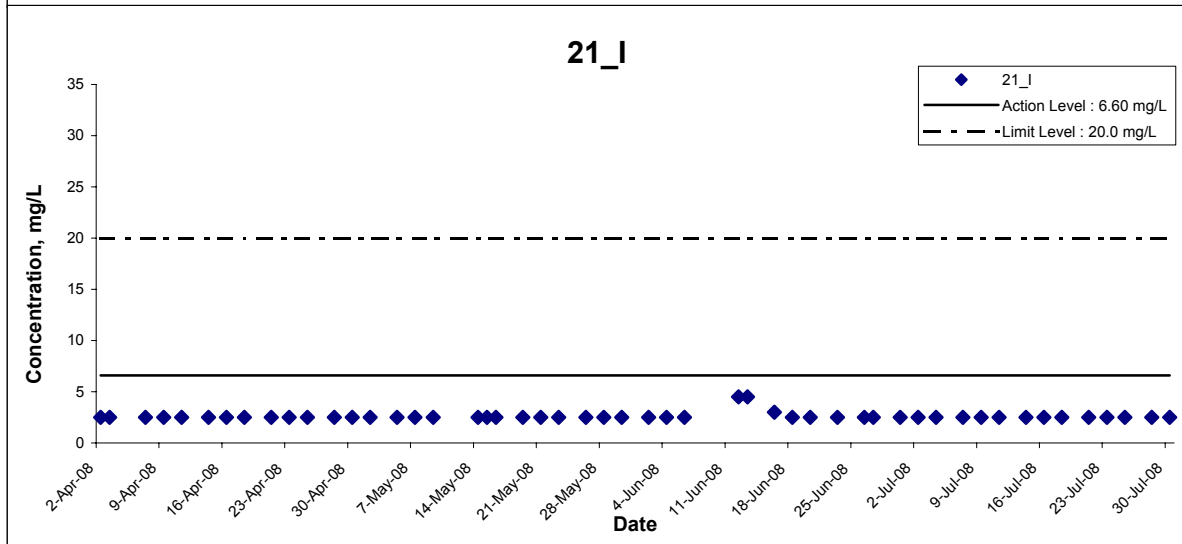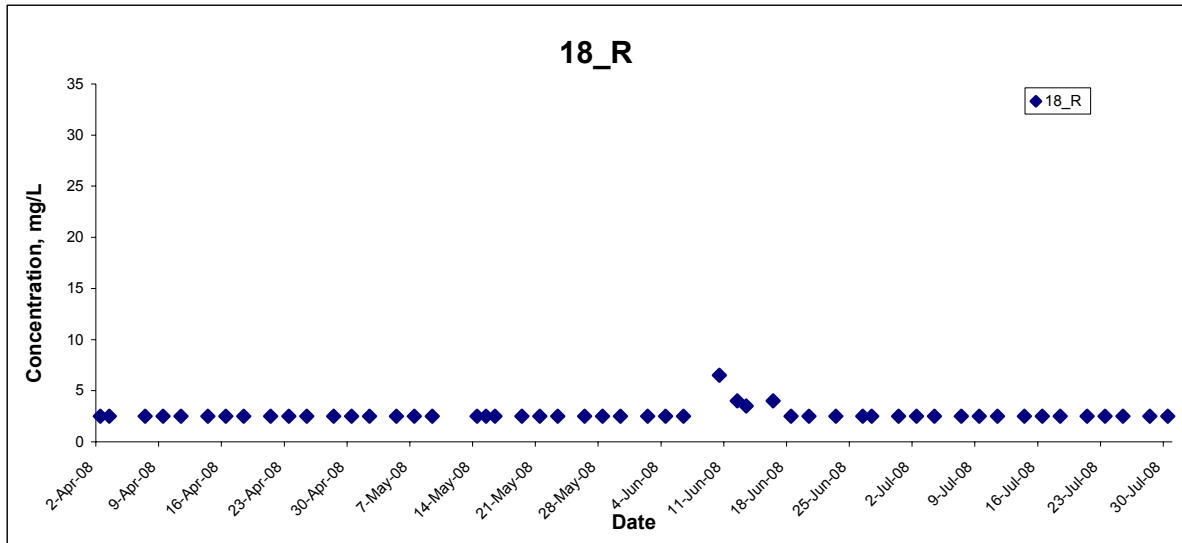




Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale	N.T.S	Project No. MA6030	CINOTECH
	Date	Jul 08	Appendix F	

## Suspended Solids

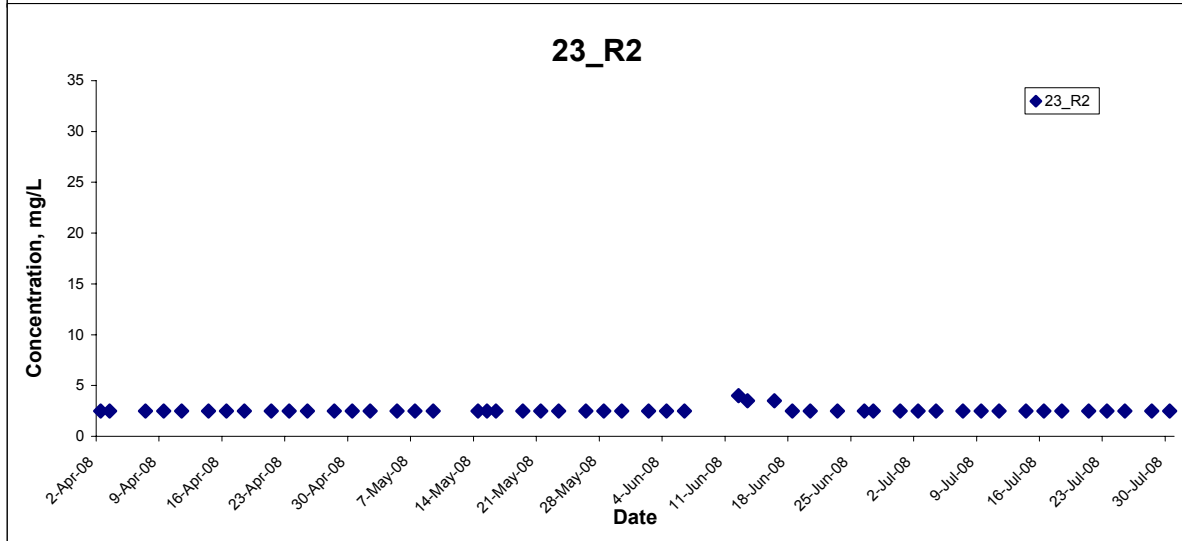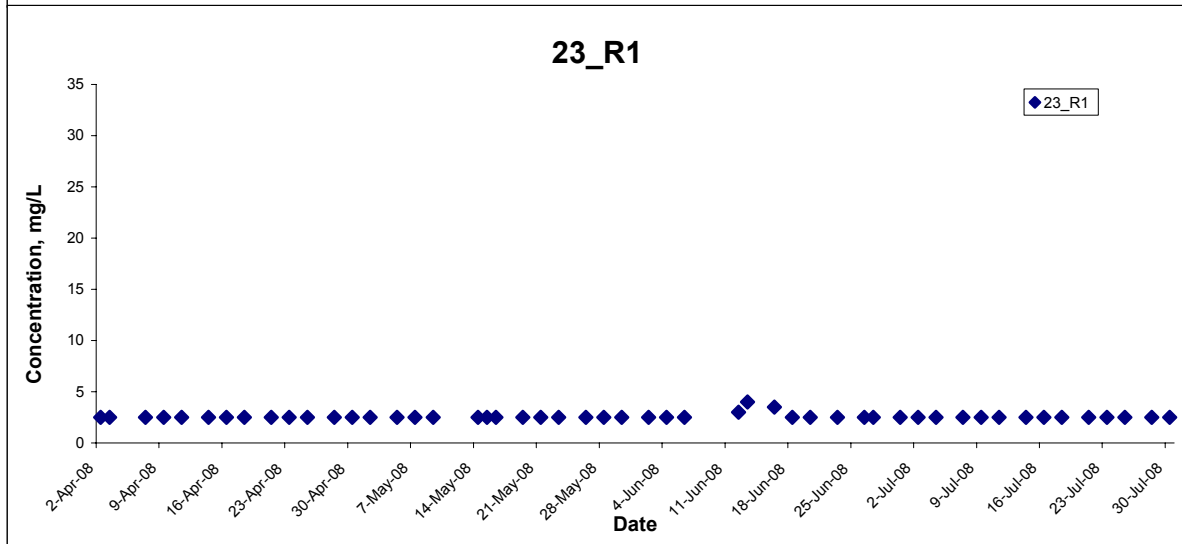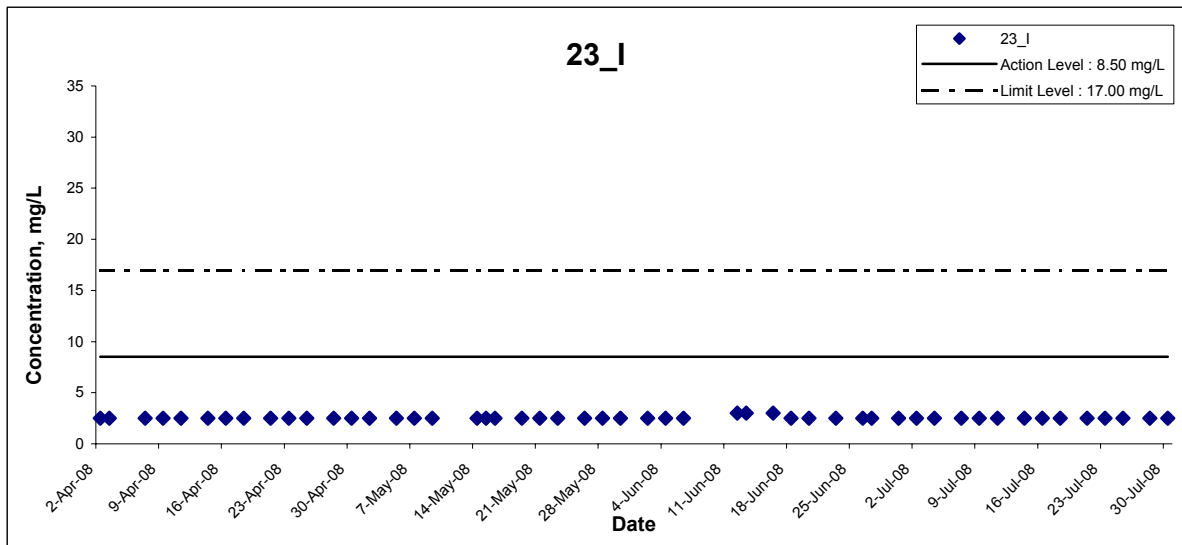




Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale	N.T.S	Project No. MA6030	CINOTECH
	Date	Jul 08	Appendix F	

## Suspended Solids

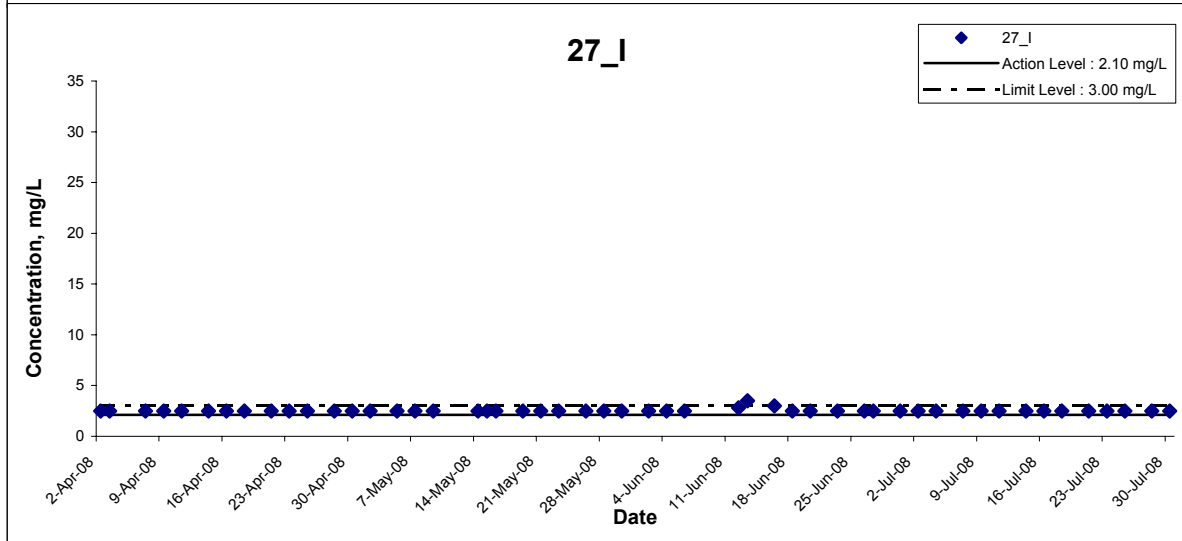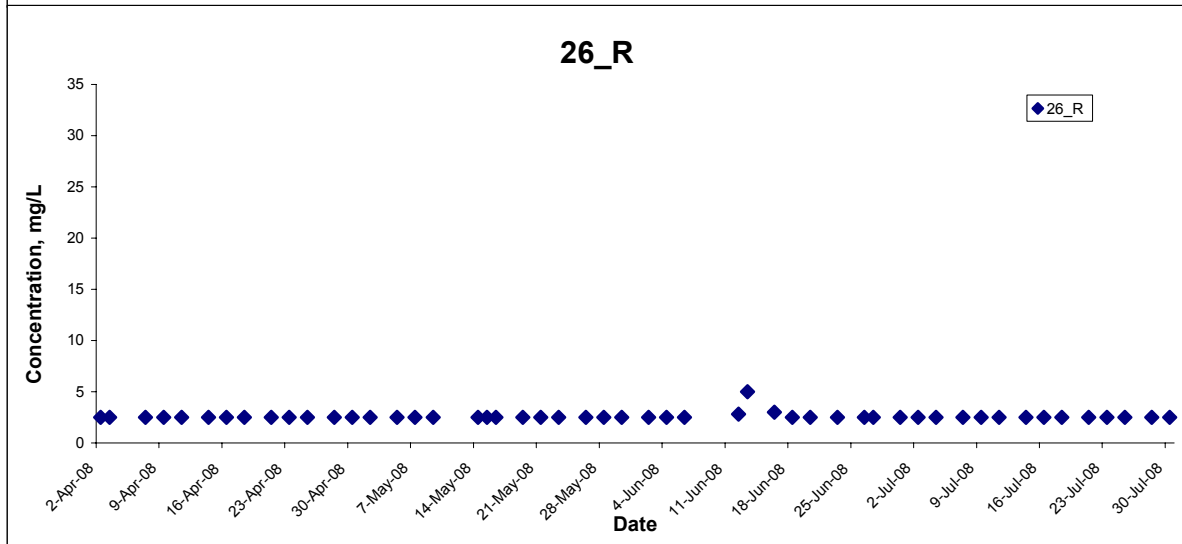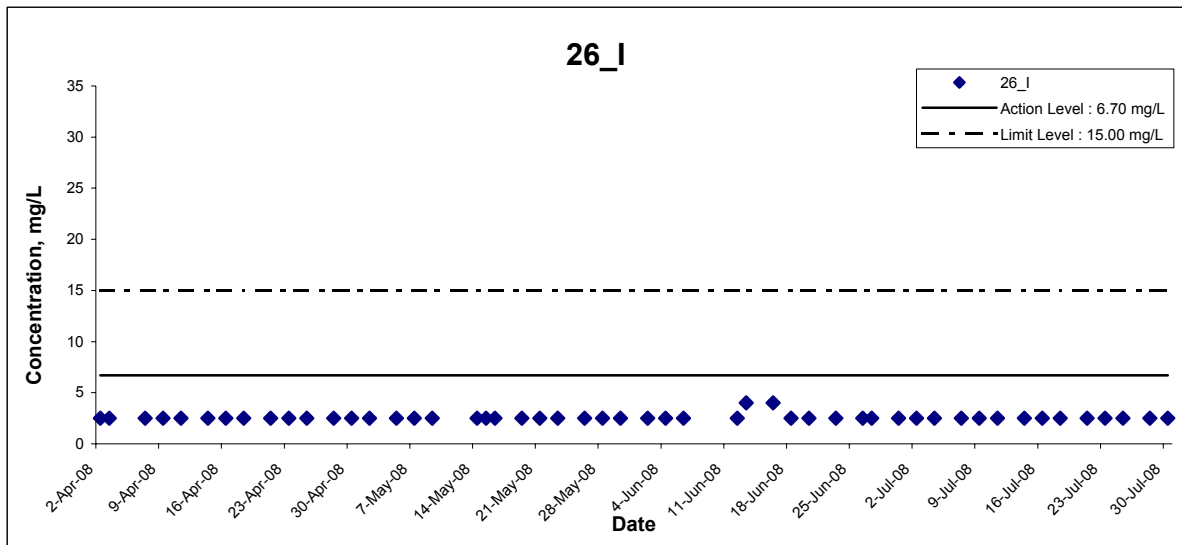




Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale N.T.S	Project No. MA6030	CINOTECH
	Date Jul 08	Appendix F	

## Suspended Solids

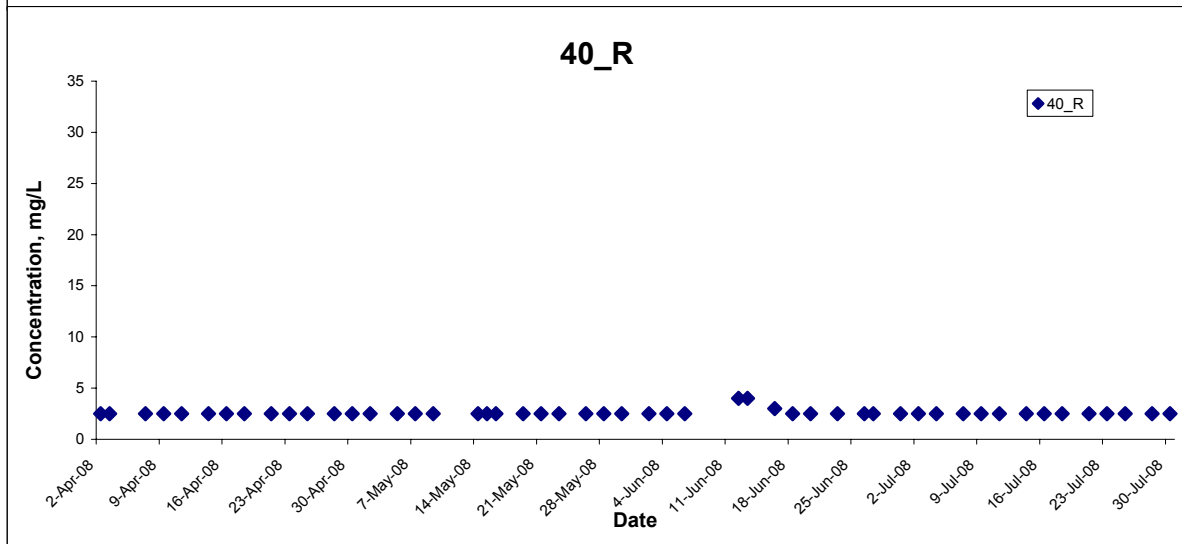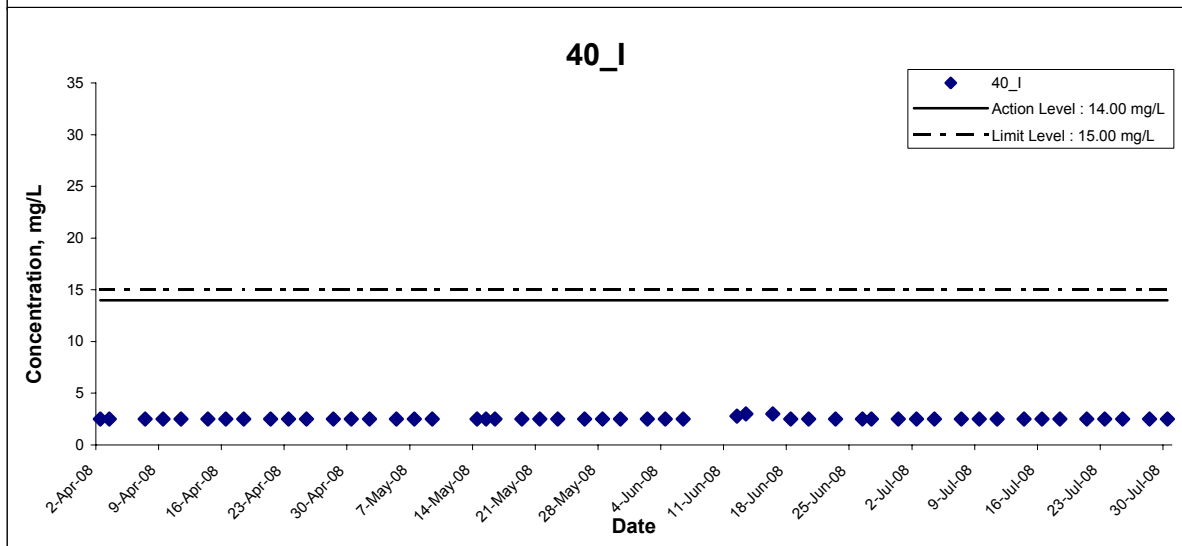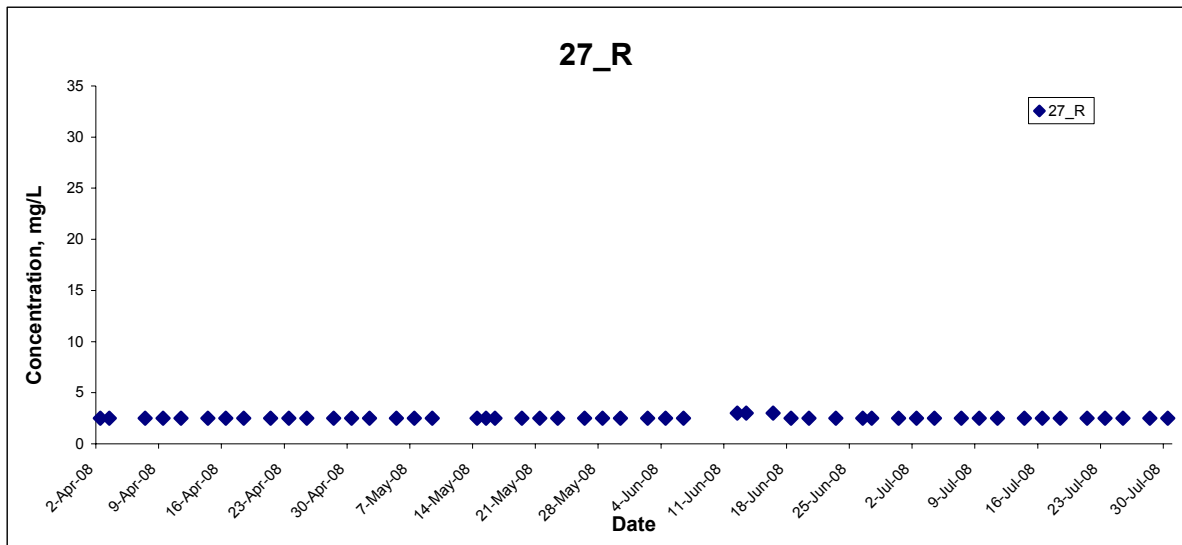


Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale N.T.S	Project No. MA6030	<b>CINOTECH</b>
	Date Jul 08	Appendix F	

## Suspended Solids

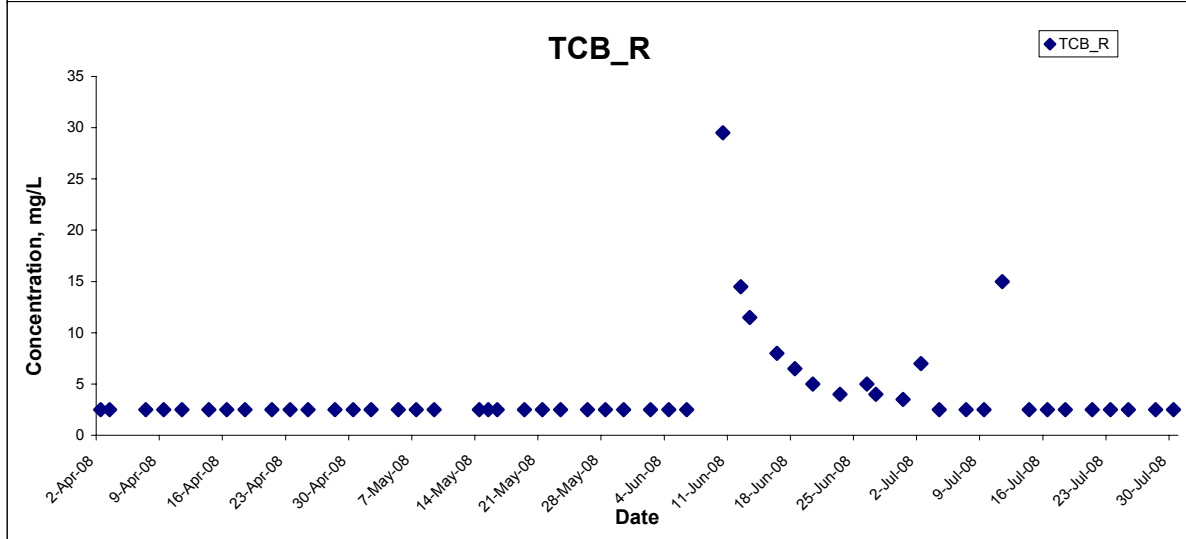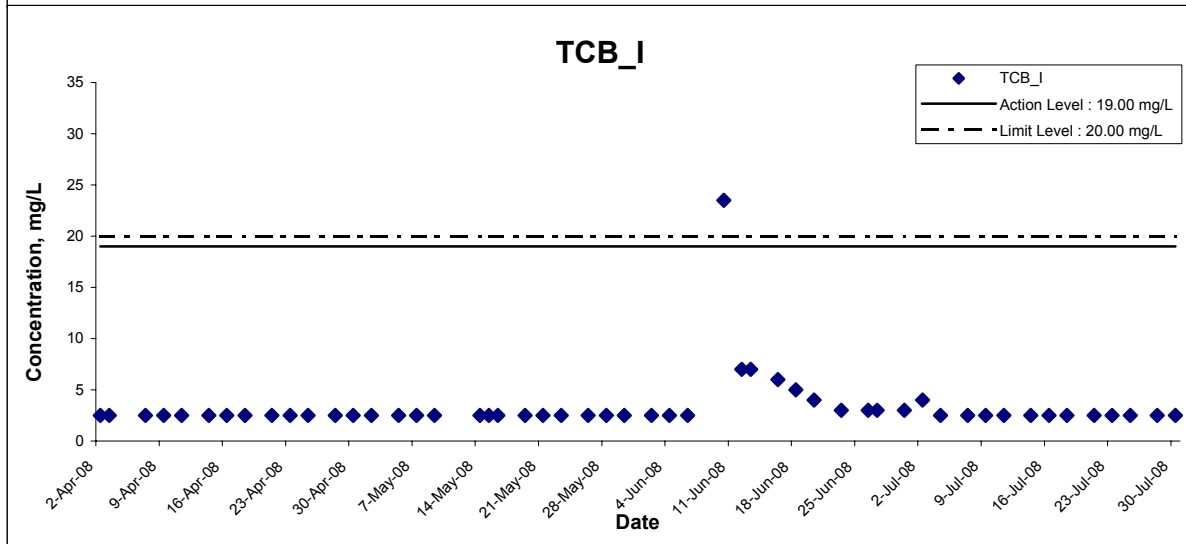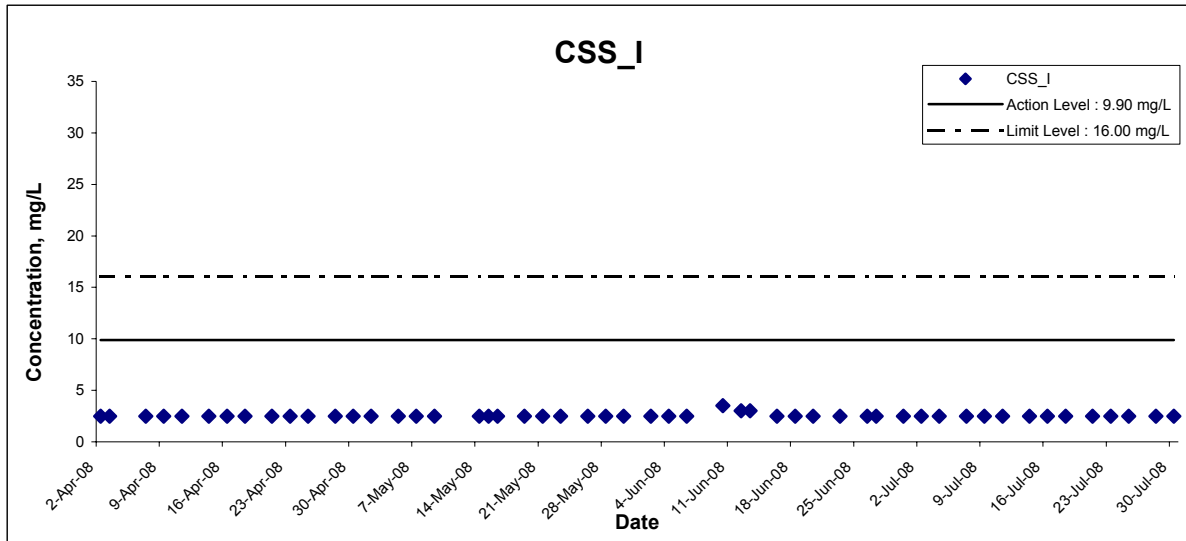

Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale	N.T.S	Project No. MA6030	<b>CINOTECH</b>
	Date	Jul 08	Appendix F	

## Suspended Solids

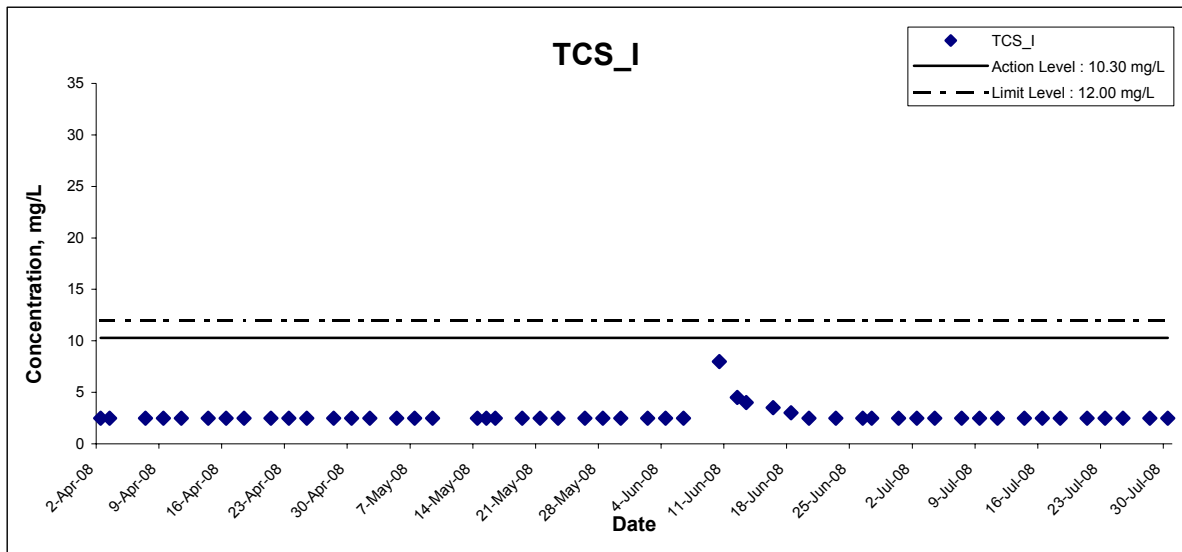

Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale N.T.S	Project No. MA6030	<b>CINOTECH</b>
	Date Jul 08	Appendix F	

---

---

**APPENDIX G  
QUALITY CONTROL REPORTS FOR  
LABORATORY ANALYSIS**

---

---

**TEST REPORT**  
**QC REPORT**

**APPLICANT: Cinotech Consultants Limited**  
**RM 1710, Technology Park,**  
**18 On Lai Street,**  
**Shatin, N.T., Hong Kong**

Laboratory No.:	06892
Date of Issue:	2008/07/03
Date Received:	2008/07/02
Date Tested:	2008/07/02
Date Completed:	2008/07/03

Page: 1 of 1

**ATTN: Mr. Henry Leung**

Sampling Site: Tung Chung Road  
Project No.: MA6030  
Sampling Date: 2008/07/02  
Number of Sample: 38  
Custody No.: MA6030/80702

\*\*\*\*\*

Total Suspended Solids	Duplicate Analysis			QC Recovery, %
Sampling Point	Trial 1, mg/L	Trial 2, mg/L	Difference, %	
26_I	<2.5	<2.5	N/A	99

\*\*\*\*\*End of Report\*\*\*\*\*

*PREPARED AND CHECKED BY:*

For and On Behalf of **WELLAB Ltd.**



**PATRICK TSE**

*Laboratory Manager*



**TEST REPORT**  
**QC REPORT**

**APPLICANT: Cinotech Consultants Limited**  
**RM 1710, Technology Park,**  
**18 On Lai Street,**  
**Shatin, N.T., Hong Kong**

Laboratory No.:	06906
Date of Issue:	2008/07/07
Date Received:	2008/07/04
Date Tested:	2008/07/04
Date Completed:	2008/07/07

Page: 1 of 1

**ATTN: Mr. Henry Leung**

Sampling Site: Tung Chung Road  
Project No.: MA6030  
Sampling Date: 2008/07/04  
Number of Sample: 38  
Custody No.: MA6030/80704

\*\*\*\*\*

Total Suspended Solids	Duplicate Analysis			QC Recovery, %
Sampling Point	Trial 1, mg/L	Trial 2, mg/L	Difference, %	
26_I	<2.5	<2.5	N/A	101

\*\*\*\*\*End of Report\*\*\*\*\*

*PREPARED AND CHECKED BY:*  
For and On Behalf of **WELLAB Ltd.**



**PATRICK TSE**  
*Laboratory Manager*

**TEST REPORT**  
**QC REPORT**

**APPLICANT: Cinotech Consultants Limited**  
**RM 1710, Technology Park,**  
**18 On Lai Street,**  
**Shatin, N.T., Hong Kong**

Laboratory No.:	06921
Date of Issue:	2008/07/08
Date Received:	2008/07/07
Date Tested:	2008/07/07
Date Completed:	2008/07/08

Page: 1 of 1

**ATTN: Mr. Henry Leung**

Sampling Site: Tung Chung Road  
Project No.: MA6030  
Sampling Date: 2008/07/07  
Number of Sample: 38  
Custody No.: MA6030/80707

\*\*\*\*\*

Total Suspended Solids	Duplicate Analysis			QC Recovery, %
Sampling Point	Trial 1, mg/L	Trial 2, mg/L	Difference, %	
26_I	<2.5	<2.5	N/A	100

\*\*\*\*\*End of Report\*\*\*\*\*

*PREPARED AND CHECKED BY:*

For and On Behalf of **WELLAB Ltd.**



**PATRICK TSE**

*Laboratory Manager*

**TEST REPORT**  
**QC REPORT**

**APPLICANT: Cinotech Consultants Limited**  
**RM 1710, Technology Park,**  
**18 On Lai Street,**  
**Shatin, N.T., Hong Kong**

Laboratory No.:	06938
Date of Issue:	2008/07/10
Date Received:	2008/07/09
Date Tested:	2008/07/09
Date Completed:	2008/07/10

Page: 1 of 1

**ATTN: Mr. Henry Leung**

Sampling Site: Tung Chung Road  
Project No.: MA6030  
Sampling Date: 2008/07/09  
Number of Sample: 38  
Custody No.: MA6030/80709

\*\*\*\*\*

Total Suspended Solids	Duplicate Analysis			QC Recovery, %
Sampling Point	Trial 1, mg/L	Trial 2, mg/L	Difference, %	
26_I	<2.5	<2.5	N/A	103

\*\*\*\*\*End of Report\*\*\*\*\*

*PREPARED AND CHECKED BY:*  
For and On Behalf of **WELLAB Ltd.**



**PATRICK TSE**  
*Laboratory Manager*

**TEST REPORT**  
**QC REPORT**

**APPLICANT: Cinotech Consultants Limited**  
**RM 1710, Technology Park,**  
**18 On Lai Street,**  
**Shatin, N.T., Hong Kong**

Laboratory No.:	06958
Date of Issue:	2008/07/14
Date Received:	2008/07/11
Date Tested:	2008/07/11
Date Completed:	2008/07/14

Page: 1 of 1

**ATTN: Mr. Henry Leung**

Sampling Site: Tung Chung Road  
Project No.: MA6030  
Sampling Date: 2008/07/11  
Number of Sample: 38  
Custody No.: MA6030/80711

\*\*\*\*\*

Total Suspended Solids	Duplicate Analysis			QC Recovery, %
Sampling Point	Trial 1, mg/L	Trial 2, mg/L	Difference, %	
26_I	<2.5	<2.5	N/A	102

\*\*\*\*\*End of Report\*\*\*\*\*

*PREPARED AND CHECKED BY:*

For and On Behalf of **WELLAB Ltd.**



**PATRICK TSE**

*Laboratory Manager*

**TEST REPORT**  
**QC REPORT**

**APPLICANT: Cinotech Consultants Limited**  
**RM 1710, Technology Park,**  
**18 On Lai Street,**  
**Shatin, N.T., Hong Kong**

Laboratory No.:	06972
Date of Issue:	2008/07/15
Date Received:	2008/07/14
Date Tested:	2008/07/14
Date Completed:	2008/07/15

Page: 1 of 1

**ATTN: Mr. Henry Leung**

Sampling Site: Tung Chung Road  
Project No.: MA6030  
Sampling Date: 2008/07/14  
Number of Sample: 38  
Custody No.: MA6030/80714

\*\*\*\*\*

Total Suspended Solids	Duplicate Analysis			QC Recovery, %
Sampling Point	Trial 1, mg/L	Trial 2, mg/L	Difference, %	
18_I	<2.5	<2.5	N/A	96

\*\*\*\*\*End of Report\*\*\*\*\*

*PREPARED AND CHECKED BY:*  
For and On Behalf of **WELLAB Ltd.**



**PATRICK TSE**  
*Laboratory Manager*

**TEST REPORT**  
**QC REPORT**

**APPLICANT: Cinotech Consultants Limited**  
**RM 1710, Technology Park,**  
**18 On Lai Street,**  
**Shatin, N.T., Hong Kong**

Laboratory No.:	06982
Date of Issue:	2008/07/17
Date Received:	2008/07/16
Date Tested:	2008/07/16
Date Completed:	2008/07/17

Page: 1 of 1

**ATTN: Mr. Henry Leung**

Sampling Site: Tung Chung Road  
Project No.: MA6030  
Sampling Date: 2008/07/16  
Number of Sample: 38  
Custody No.: MA6030/80716

\*\*\*\*\*

Total Suspended Solids	Duplicate Analysis			QC Recovery, %
Sampling Point	Trial 1, mg/L	Trial 2, mg/L	Difference, %	
18_I	<2.5	<2.5	N/A	106

\*\*\*\*\*End of Report\*\*\*\*\*

*PREPARED AND CHECKED BY:*  
For and On Behalf of **WELLAB Ltd.**



**PATRICK TSE**  
*Laboratory Manager*

**TEST REPORT**  
**QC REPORT**

**APPLICANT: Cinotech Consultants Limited**  
**RM 1710, Technology Park,**  
**18 On Lai Street,**  
**Shatin, N.T., Hong Kong**

Laboratory No.:	06999
Date of Issue:	2008/07/21
Date Received:	2008/07/18
Date Tested:	2008/07/18
Date Completed:	2008/07/21

Page: 1 of 1

**ATTN: Mr. Henry Leung**

Sampling Site: Tung Chung Road  
Project No.: MA6030  
Sampling Date: 2008/07/18  
Number of Sample: 38  
Custody No.: MA6030/80718

\*\*\*\*\*

Total Suspended Solids	Duplicate Analysis			QC Recovery, %
Sampling Point	Trial 1, mg/L	Trial 2, mg/L	Difference, %	
18_I	<2.5	<2.5	N/A	100

\*\*\*\*\*End of Report\*\*\*\*\*

*PREPARED AND CHECKED BY:*  
For and On Behalf of **WELLAB Ltd.**



**PATRICK TSE**  
*Laboratory Manager*

**TEST REPORT**  
**QC REPORT**

**APPLICANT: Cinotech Consultants Limited**  
**RM 1710, Technology Park,**  
**18 On Lai Street,**  
**Shatin, N.T., Hong Kong**

Laboratory No.:	07004
Date of Issue:	2008/07/22
Date Received:	2008/07/21
Date Tested:	2008/07/21
Date Completed:	2008/07/22

Page: 1 of 1

**ATTN: Mr. Henry Leung**

Sampling Site: Tung Chung Road  
Project No.: MA6030  
Sampling Date: 2008/07/21  
Number of Sample: 38  
Custody No.: MA6030/80721

\*\*\*\*\*

Total Suspended Solids	Duplicate Analysis			QC Recovery, %
Sampling Point	Trial 1, mg/L	Trial 2, mg/L	Difference, %	
18_I	<2.5	<2.5	N/A	111

\*\*\*\*\*End of Report\*\*\*\*\*

*PREPARED AND CHECKED BY:*  
For and On Behalf of **WELLAB Ltd.**



**PATRICK TSE**  
*Laboratory Manager*



**TEST REPORT**  
**QC REPORT**

**APPLICANT: Cinotech Consultants Limited**  
**RM 1710, Technology Park,**  
**18 On Lai Street,**  
**Shatin, N.T., Hong Kong**

Laboratory No.:	07020
Date of Issue:	2008/07/24
Date Received:	2008/07/23
Date Tested:	2008/07/23
Date Completed:	2008/07/24

Page: 1 of 1

**ATTN: Mr. Henry Leung**

Sampling Site: Tung Chung Road  
Project No.: MA6030  
Sampling Date: 2008/07/23  
Number of Sample: 38  
Custody No.: MA6030/80723

\*\*\*\*\*

Total Suspended Solids	Duplicate Analysis			QC Recovery, %
Sampling Point	Trial 1, mg/L	Trial 2, mg/L	Difference, %	
26_I	<2.5	<2.5	N/A	103

\*\*\*\*\*End of Report\*\*\*\*\*

*PREPARED AND CHECKED BY:*  
For and On Behalf of **WELLAB Ltd.**



**PATRICK TSE**  
*Laboratory Manager*

**TEST REPORT**  
**QC REPORT**

**APPLICANT: Cinotech Consultants Limited**  
**RM 1710, Technology Park,**  
**18 On Lai Street,**  
**Shatin, N.T., Hong Kong**

Laboratory No.:	07033
Date of Issue:	2008/07/28
Date Received:	2008/07/25
Date Tested:	2008/07/25
Date Completed:	2008/07/28

Page: 1 of 1

**ATTN: Mr. Henry Leung**

Sampling Site: Tung Chung Road  
Project No.: MA6030  
Sampling Date: 2008/07/25  
Number of Sample: 38  
Custody No.: MA6030/80725

\*\*\*\*\*

Total Suspended Solids	Duplicate Analysis			QC Recovery, %
Sampling Point	Trial 1, mg/L	Trial 2, mg/L	Difference, %	
26_I	<2.5	<2.5	N/A	99

\*\*\*\*\*End of Report\*\*\*\*\*

*PREPARED AND CHECKED BY:*

For and On Behalf of **WELLAB Ltd.**



**PATRICK TSE**

*Laboratory Manager*

**TEST REPORT**  
**QC REPORT**

**APPLICANT: Cinotech Consultants Limited**  
**RM 1710, Technology Park,**  
**18 On Lai Street,**  
**Shatin, N.T., Hong Kong**

Laboratory No.:	07042
Date of Issue:	2008/07/29
Date Received:	2008/07/28
Date Tested:	2008/07/28
Date Completed:	2008/07/29

Page: 1 of 1

**ATTN: Mr. Henry Leung**

Sampling Site: Tung Chung Road  
Project No.: MA6030  
Sampling Date: 2008/07/28  
Number of Sample: 38  
Custody No.: MA6030/80728

\*\*\*\*\*

Total Suspended Solids	Duplicate Analysis			QC Recovery, %
Sampling Point	Trial 1, mg/L	Trial 2, mg/L	Difference, %	
26_I	<2.5	<2.5	N/A	97

\*\*\*\*\*End of Report\*\*\*\*\*

*PREPARED AND CHECKED BY:*  
For and On Behalf of **WELLAB Ltd.**



**PATRICK TSE**  
*Laboratory Manager*

**TEST REPORT**  
**QC REPORT**

**APPLICANT: Cinotech Consultants Limited**  
**RM 1710, Technology Park,**  
**18 On Lai Street,**  
**Shatin, N.T., Hong Kong**

Laboratory No.:	07054
Date of Issue:	2008/07/31
Date Received:	2008/07/30
Date Tested:	2008/07/30
Date Completed:	2008/07/31

Page: 1 of 1

**ATTN: Mr. Henry Leung**

Sampling Site: Tung Chung Road  
Project No.: MA6030  
Sampling Date: 2008/07/30  
Number of Sample: 38  
Custody No.: MA6030/80730

\*\*\*\*\*

Total Suspended Solids	Duplicate Analysis			QC Recovery, %
Sampling Point	Trial 1, mg/L	Trial 2, mg/L	Difference, %	
26_I	<2.5	<2.5	N/A	104

\*\*\*\*\*End of Report\*\*\*\*\*

*PREPARED AND CHECKED BY:*  
For and On Behalf of **WELLAB Ltd.**



**PATRICK TSE**  
*Laboratory Manager*

---

---

**APPENDIX H  
SUMMARY OF EXCEEDANCES**

---

---

**Contract No. HY/2003/19**  
**Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha - Exceedance Report**  
**Report No. 80704W-80702\_S**

**Part A – Exceedance Summary Tables**

**Table 1: Parameter – Suspended Solids (mg/L)**

Stream Location	Measured Value	Exceedances Criteria				Action / Limit Levels	Justification*	Validity (Y/N)	Action Taken (Y/N)
		Action value	120% of Reference value*	Limit Value	130% of Reference Value*				
27_I	2.5	2.1	3.0	3.0	3.25	Action	(2) & (4)	N	N

- \*Remarks
- (1) – No construction activity was observed.
  - (2) – No pollution discharge from construction activity was observed.
  - (3) – Natural humus or mosses was observed.
  - (4) – Reference point value already exceeded either the Action or Limit Levels.

**Contract No. HY/2003/19****Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha - Exceedance Report****Report No. 80709W-80704\_S****Part A – Exceedance Summary Tables****Table 1: Parameter – Suspended Solids (mg/L)**

Stream Location	Measured Value	Exceedances Criteria				Action / Limit Levels	Justification*	Validity (Y/N)	Action Taken (Y/N)
		Action value	120% of Reference value*	Limit Value	130% of Reference Value*				
27_I	2.5	2.1	3.0	3.0	3.25	Action	(2) & (4)	N	N

## \*Remarks

(1) – No construction activity was observed.

(2) – No pollution discharge from construction activity was observed.

(3) – Natural humus or mosses was observed.

(4) – Reference point value already exceeded either the Action or Limit Levels.

**Contract No. HY/2003/19**  
**Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha - Exceedance Report**  
**Report No. 80709W-80707\_S**

**Part A – Exceedance Summary Tables**

**Table 1: Parameter – Suspended Solids (mg/L)**

Stream Location	Measured Value	Exceedances Criteria				Action / Limit Levels	Justification*	Validity (Y/N)	Action Taken (Y/N)
		Action value	120% of Reference value*	Limit Value	130% of Reference Value*				
27_I	2.5	2.1	3.0	3.0	3.25	Action	(2) & (4)	N	N

- \*Remarks
- (1) – No construction activity was observed.
  - (2) – No pollution discharge from construction activity was observed.
  - (3) – Natural humus or mosses was observed.
  - (4) – Reference point value already exceeded either the Action or Limit Levels.



**Contract No. HY/2003/19**  
**Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha - Exceedance Report**  
**Report No. 80714W-80709\_S**

**Part A – Exceedance Summary Tables**

**Table 1: Parameter – Suspended Solids (mg/L)**

Stream Location	Measured Value	Exceedances Criteria				Action / Limit Levels	Justification*	Validity (Y/N)	Action Taken (Y/N)
		Action value	120% of Reference value*	Limit Value	130% of Reference Value*				
27_I	2.5	2.1	3.0	3.0	3.25	Action	(2) & (4)	N	N

- \*Remarks
- (1) – No construction activity was observed.
  - (2) – No pollution discharge from construction activity was observed.
  - (3) – Natural humus or mosses was observed.
  - (4) – Reference point value already exceeded either the Action or Limit Levels.

**Contract No. HY/2003/19**  
**Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha - Exceedance Report**  
**Report No. 80715W-80711\_S**

**Part A – Exceedance Summary Tables**

**Table 1: Parameter – Suspended Solids (mg/L)**

Stream Location	Measured Value	Exceedances Criteria				Action / Limit Levels	Justification*	Validity (Y/N)	Action Taken (Y/N)
		Action value	120% of Reference value*	Limit Value	130% of Reference Value*				
27_I	2.5	2.1	3.0	3.0	3.25	Action	(2) & (4)	N	N

- \*Remarks
- (1) – No construction activity was observed.
  - (2) – No pollution discharge from construction activity was observed.
  - (3) – Natural humus or mosses was observed.
  - (4) – Reference point value already exceeded either the Action or Limit Levels.

**Contract No. HY/2003/19**  
**Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha - Exceedance Report**  
**Report No. 80717W-80714\_S**

**Part A – Exceedance Summary Tables**

**Table 1: Parameter – Suspended Solids (mg/L)**

Stream Location	Measured Value	Exceedances Criteria				Action / Limit Levels	Justification*	Validity (Y/N)	Action Taken (Y/N)
		Action value	120% of Reference value*	Limit Value	130% of Reference Value*				
27_I	2.5	2.1	3.0	3.0	3.25	Action	(2) & (4)	N	N

- \*Remarks
- (1) – No construction activity was observed.
  - (2) – No pollution discharge from construction activity was observed.
  - (3) – Natural humus or mosses was observed.
  - (4) – Reference point value already exceeded either the Action or Limit Levels.

**Contract No. HY/2003/19**  
**Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha - Exceedance Report**  
**Report No. 80721W-80716\_S**

**Part A – Exceedance Summary Tables**

**Table 1: Parameter – Suspended Solids (mg/L)**

Stream Location	Measured Value	Exceedances Criteria				Action / Limit Levels	Justification*	Validity (Y/N)	Action Taken (Y/N)
		Action value	120% of Reference value*	Limit Value	130% of Reference Value*				
27_I	2.5	2.1	3.0	3.0	3.25	Action	(2) & (4)	N	N

- \*Remarks
- (1) – No construction activity was observed.
  - (2) – No pollution discharge from construction activity was observed.
  - (3) – Natural humus or mosses was observed.
  - (4) – Reference point value already exceeded either the Action or Limit Levels.

**Contract No. HY/2003/19**  
**Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha - Exceedance Report**  
**Report No. 80723W-80718\_S**

**Part A – Exceedance Summary Tables**

**Table 1: Parameter – Suspended Solids (mg/L)**

Stream Location	Measured Value	Exceedances Criteria				Action / Limit Levels	Justification*	Validity (Y/N)	Action Taken (Y/N)
		Action value	120% of Reference value*	Limit Value	130% of Reference Value*				
27_I	2.5	2.1	3.0	3.0	3.25	Action	(2) & (4)	N	N

- \*Remarks
- (1) – No construction activity was observed.
  - (2) – No pollution discharge from construction activity was observed.
  - (3) – Natural humus or mosses was observed.
  - (4) – Reference point value already exceeded either the Action or Limit Levels.

**Contract No. HY/2003/19**  
**Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha - Exceedance Report**  
**Report No. 80723W-80721\_S**

**Part A – Exceedance Summary Tables**

**Table 1: Parameter – Suspended Solids (mg/L)**

Stream Location	Measured Value	Exceedances Criteria				Action / Limit Levels	Justification*	Validity (Y/N)	Action Taken (Y/N)
		Action value	120% of Reference value*	Limit Value	130% of Reference Value*				
27_I	2.5	2.1	3.0	3.0	3.25	Action	(2) & (4)	N	N

- \*Remarks
- (1) – No construction activity was observed.
  - (2) – No pollution discharge from construction activity was observed.
  - (3) – Natural humus or mosses was observed.
  - (4) – Reference point value already exceeded either the Action or Limit Levels.

**Contract No. HY/2003/19****Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha - Exceedance Report****Report No. 80725W-80723\_TS****Part A – Exceedance Summary Tables****Table 1: Parameter – Turbidity (NTU)**

Stream Location	Measured Value	Exceedances Criteria				Action / Limit Levels	Justification *	Validity (Y/N)	Action Taken (Y/N)
		Action value	120% of Reference value *	Limit Value	130% of Reference Value *				
CSS_I	2.2	7.91	1.9	10.50	2.1	Limit	(1)	N	N

**Table 2: Parameter – Suspended Solids (mg/L)**

Stream Location	Measured Value	Exceedances Criteria				Action / Limit Levels	Justification *	Validity (Y/N)	Action Taken (Y/N)
		Action value	120% of Reference value *	Limit Value	130% of Reference Value *				
27_I	2.5	2.1	3.0	3.0	3.25	Action	(2) & (4)	N	N

- \*Remarks
- (1) – No construction activity was observed.
  - (2) – No pollution discharge from construction activity was observed.
  - (3) – Natural humus or mosses was observed.
  - (4) – Reference point value already exceeded either the Action or Limit Levels.

**Contract No. HY/2003/19****Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha - Exceedance Report****Report No. 80729W-80725\_TS****Part A – Exceedance Summary Tables****Table 1: Parameter – Turbidity (NTU)**

Stream Location	Measured Value	Exceedances Criteria				Action / Limit Levels	Justification *	Validity (Y/N)	Action Taken (Y/N)
		Action value	120% of Reference value *	Limit Value	130% of Reference Value *				
CSS_I	2.3	7.91	2.0	10.50	2.2	Limit	(1)	N	N

**Table 2: Parameter – Suspended Solids (mg/L)**

Stream Location	Measured Value	Exceedances Criteria				Action / Limit Levels	Justification *	Validity (Y/N)	Action Taken (Y/N)
		Action value	120% of Reference value *	Limit Value	130% of Reference Value *				
27_I	2.5	2.1	3.0	3.0	3.25	Action	(2) & (4)	N	N

- \*Remarks
- (1) – No construction activity was observed.
  - (2) – No pollution discharge from construction activity was observed.
  - (3) – Natural humus or mosses was observed.
  - (4) – Reference point value already exceeded either the Action or Limit Levels.



**Contract No. HY/2003/19****Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha - Exceedance Report****Report No. 80730W-80728\_TS****Part A – Exceedance Summary Tables****Table 1: Parameter – Turbidity (NTU)**

Stream Location	Measured Value	Exceedances Criteria				Action / Limit Levels	Justification *	Validity (Y/N)	Action Taken (Y/N)
		Action value	120% of Reference value *	Limit Value	130% of Reference Value *				
CSS_I	2.0	7.91	1.9	10.50	2.1	Action	(1)	N	N

**Table 2: Parameter – Suspended Solids (mg/L)**

Stream Location	Measured Value	Exceedances Criteria				Action / Limit Levels	Justification *	Validity (Y/N)	Action Taken (Y/N)
		Action value	120% of Reference value *	Limit Value	130% of Reference Value *				
27_I	2.5	2.1	3.0	3.0	3.25	Action	(2) & (4)	N	N

- \*Remarks
- (1) – No construction activity was observed.
  - (2) – No pollution discharge from construction activity was observed.
  - (3) – Natural humus or mosses was observed.
  - (4) – Reference point value already exceeded either the Action or Limit Levels.

**Contract No. HY/2003/19****Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha - Exceedance Report****Report No. 80801W-80730\_DOTS****Part A – Exceedance Summary Tables****Table 1: Parameter – Turbidity (NTU)**

Stream Location	Measured Value	Exceedances Criteria				Action / Limit Levels	Justification *	Validity (Y/N)	Action Taken (Y/N)
		Action value	120% of Reference value *	Limit Value	130% of Reference Value *				
CSS_I	2.2	7.91	2.0	10.50	2.2	Action	(1)	N	N

**Table 2: Parameter – Suspended Solids (mg/L)**

Stream Location	Measured Value	Exceedances Criteria				Action / Limit Levels	Justification *	Validity (Y/N)	Action Taken (Y/N)
		Action value	120% of Reference value *	Limit Value	130% of Reference Value *				
27_I	2.5	2.1	3.0	3.0	3.25	Action	(2) & (4)	N	N

**Table 3: Parameter – Dissolved Oxygen (mg/L)**

Stream Location	Measured Value	Level Criteria		Action / Limit Levels	Justification *	Validity (Y/N)	Action Taken (Y/N)
		Action value	Limit Value				
18_I	6.4	6.43	4.00	Action	(1) & (3)	N	N
21_I	6.5	6.73	4.00	Action	(1) & (3)	N	N

- \*Remarks
- (1) – No construction activity was observed.
  - (2) – No pollution discharge from construction activity was observed.
  - (3) – Natural humus or mosses was observed.
  - (4) – Reference point value already exceeded either the Action or Limit Levels.

---

---

**APPENDIX I  
SITE AUDIT SUMMARY**

---

---

Weekly Site Inspection Record Summary

Inspection Information

Checklist Reference Number	80703
Date	3 July 2008 (Thursday)
Time	9:00 – 12:30



Ref. No.	Non-Compliance	Related Item No.
-	None identified	-
Ref. No.	Remarks/Observations	Related Item No.
	<b>A. Water Quality</b>	
80703-O01	• Standing silty water was observed accumulate at <b>Shan Shek Wan</b> . The Contractor was reminded to provide sedimentation tank for de-silting before discharging out.	B11
80703-O02	• Sediment was observed accumulate at the sedimentation tanks at <b>Shan Shek Wan</b> to cause the tank cannot function properly. The Contractor was reminded to clear the silt and sediment.	B5iii. & iv.
	<b>B. Air Quality</b>	
	• No environmental deficiency was identified during site inspection.	
	<b>C. Noise</b>	
	• No environmental deficiency was identified during site inspection.	
	<b>D. Waste / Chemical Management</b>	
	• No environmental deficiency was identified during site inspection.	
	<b>E. Ecology</b>	
	• No environmental deficiency was identified during site inspection.	
	<b>F. Others</b>	
	• All environmental deficiencies identified in previous audit session were improved/rectified by the Contractor except items (80626-O01, R03 – R04, R06, R9 – R13, R15 – 19, G20 – G22). Follow-up action is needed for the outstanding items.	

	Reminders	Related Item No.
	The Contractor was reminded to implement the following preventive measures:	
	<b>A. Water Quality</b>	
80703-R03	• Properly cover the exposed surface near <b>Stream 25</b> .	B8
80703-R05	• Hydroseed/cover the exposed slope with tarpaulin at underneath <b>STR10-13</b> .	B8
80703-R07	• Hydroseed/cover the exposed surface at <b>STR14</b> .	B8
80703-R08	• Properly cover the exposed slope at underneath <b>STR16</b> .	B8
80703-R09	• Clear sediment near the catchwater.	B18
80703-R11	• Properly cover the exposed surface at <b>SD10-19</b> .	B8
80703-R12	• Properly cover the exposed slope at <b>RW7</b> .	B8
	<b>B. Air Quality</b>	
80703-R04	• Properly cover the stockpile at between <b>STR7-8</b> .	C7
80703-R05	• Hydroseed/cover the exposed slope with tarpaulin at underneath <b>STR10-13</b> .	C13
80703-R07	• Hydroseed/cover the exposed surface at <b>STR14</b> .	C13
80703-R10	• Properly cover the stockpile at opposite to <b>RW11, (OTCR)</b>	C7
80703-R13	• Hydroseed the exposed surface at <b>STR6</b> .	C13
	<b>C. Waste / Chemical Management</b>	
80703-R06	• Clear discarded plants at underneath between <b>STR13-14</b> .	E4ii.

Weekly Site Inspection Record Summary

80703-R14	• Clear the cement bags (abandon) at underneath RW38.	E4ii.
80703-R15	• Keep clear the discarded plants and sediment at the culvert at RW6.	E4ii.
<b>D. General</b>		
80703-G16	• Clear sediment, stones and debris in the culvert, U-Channel and gullies etc (drainage system) frequently.	B1
80703-G17	• Drying out the standing water in the valley to prevent mosquito breed. (especially at STR13)	B11
80703-G18	• Re-arrange the stream diversion to prevent silty water from discharging out (in-progress) (especially at Stream 19-20).	B15

Ref. No.	Proposed Completion Date	Completion Date	Remarks
80626-O02	3 July 2008	3 July 2008	Rectified
80626-R05			
80626-R07			
80626-R08			
80626-R14			
80703-O01	10 July 2008		Follow Up Required
80703-O02			
80703-R03			
80703-R04			
80703-R05			
80703-R06			
80703-R07			
80703-R08			
80703-R09			
80703-R10			
80703-R11			
80703-R12			
80703-R13			
80703-R14			
80703-R15			
80703-R16			
80703-R17			
80703-R18			
80703-R19			
80703-G20			
80703-G21			
80703-G22			

	Name	Signature	Date
Recorded by	Ivy Tam		3 July 2008
Checked by	Dr. Priscilla Choy		3 July 2008

Weekly Site Inspection Record Summary

Inspection Information

Checklist Reference Number	80709
Date	9 July 2008 (Thursday)
Time	9:00 – 16:00



Ref. No.	Non-Compliance	Related Item No.
-	None identified	-
Ref. No.	Remarks/Observations	Related Item No.
	<b>A. Water Quality</b>	
80709-O01	• Standing silty water was observed accumulate at <b>Shan Shek Wan</b> . The Contractor was reminded to provide sedimentation tank for de-silting before discharging out.	B11
80709-O02	• Sediment was observed accumulate at the sedimentation tanks at <b>Shan Shek Wan and Shek Mun Kap</b> to cause the tank cannot function properly. The Contractor was reminded to clear the silt and sediment.	B5iii. & iv.
80709-O03	• Oil spillage was observed at the entrance of <b>STR7</b> . The Contractor was reminded to clear them to prevent from discharging to the drainage system.	B22
	<b>B. Air Quality</b>	
	• No environmental deficiency was identified during site inspection.	
	<b>C. Noise</b>	
	• No environmental deficiency was identified during site inspection.	
	<b>D. Waste / Chemical Management</b>	
80709-O03	• Oil spillage was observed at the entrance of <b>STR7</b> . The Contractor was reminded to clear them to prevent from discharging to the drainage system.	E7i.
	<b>E. Ecology</b>	
	• No environmental deficiency was identified during site inspection.	
	<b>F. Others</b>	
	• All environmental deficiencies identified in previous audit session were improved/rectified by the Contractor except items (80703-O01, O02, R03 – R07, R09, R11, R13, R15, and G16 – G18). Follow-up action is needed for the outstanding items.	

	Reminders	Related Item No.
	The Contractor was reminded to implement the following preventive measures:	
	<b>A. Water Quality</b>	
80709-R04	• Properly cover the exposed surface near <b>Stream 25</b> .	B8
80709-R05	• Hydroseed/cover the exposed slope with tarpaulin at underneath <b>STR10-13</b> .	B8
80709-R06	• Hydroseed/cover the exposed surface at <b>STR14</b> .	B8
80709-R07	• Clear C&D waste and sediment near the catchwater.	B18
80709-R08	• Clear the stagnant water in the discarded sedimentation tanks near the catchwater.	B11
80709-R09	• Properly cover the exposed surface at <b>SD10-19</b> .	B8
80709-R10	• Properly cover the stockpile at between <b>STR7-8</b> .	B9
80709-R13	• Keep clear the sediment at the culvert at <b>RW6</b> .	B18
80709-R14	• Drying out the standing water at <b>STR8 and STR13</b> .	B11
80709-R15	• Re-arrange the stream diversion at <b>Stream 19</b> .	B15
80709-R16	• Clear sediment and debris at the paved road at <b>CH4300 (Existing TCR)</b> .	B18
	<b>B. Air Quality</b>	
80709-R05	• Hydroseed/cover the exposed slope with tarpaulin at underneath <b>STR10-13</b> .	C13

Weekly Site Inspection Record Summary

80709-R06	• Hydroseed/cover the exposed surface at STR14.	C13
80709-R10	• Properly cover the stockpile at between STR7-8.	C7
80709-R11	• Hydroseed the exposed surface at STR6.	C13
<b>C. Waste / Chemical Management</b>		
80709-R07	• Clear C&D waste and sediment near the catchwater.	E4ii.
80709-R12	• Clear discarded plants at underneath between STR13-14.	E4ii.
<b>D. General</b>		
80709-G17	• Clear sediment, stones and debris in the culvert, U-Channel and gullies etc (Drainage system) frequently.	B1

Ref. No.	Proposed Completion Date	Completion Date	Remarks
80703-R08	9 July 2008	9 July 2008	Rectified
80703-R10			
80703-R12			
80703-R14			
80709-O01	17 July 2008		Follow Up Required
80709-O02			
80709-O03			
80709-R04			
80709-R05			
80709-R06			
80709-R07			
80709-R08			
80709-R09			
80709-R10			
80709-R11			
80709-R12			
80709-R13			
80709-R14			
80709-R15			
80709-R16			
80709-G17			

	Name	Signature	Date
Recorded by	Ivy Tam		9 July 2008
Checked by	Dr. Priscilla Choy		9 July 2008

## Weekly Site Inspection Record Summary

## Inspection Information

Checklist Reference Number	80717
Date	17 July 2008 (Thursday)
Time	9:00 – 13:45

Ref. No.	Non-Compliance	Related Item No.
-	None identified	-
Ref. No.	Remarks/Observations	Related Item No.
	<b>A. Water Quality</b>	
80717-001	• Standing silty water was observed accumulate at <b>Shan Shek Wan</b> . The Contractor was reminded to provide sedimentation tank for de-silting before discharging out.	B11
80717-002	• Sediment was observed accumulate at the sedimentation tanks at <b>Shan Shek Wan and Shek Mun Kap</b> . The Contractor was reminded to clear the silt and sediment to maintain the tanks can function properly.	B5iii. & iv.
80717-003	• Silt water was observed discharging to the public road at underneath <b>STR7</b> . The Contractor was reminded to provide sedimentation tank for de-silting before discharging out.	B5i.
	<b>B. Air Quality</b>	
	• No environmental deficiency was identified during site inspection.	
	<b>C. Noise</b>	
	• No environmental deficiency was identified during site inspection.	
	<b>D. Waste / Chemical Management</b>	
	• No environmental deficiency was identified during site inspection.	
	<b>E. Ecology</b>	
	• No environmental deficiency was identified during site inspection.	
	<b>F. Others</b>	
	• All environmental deficiencies identified in previous audit session were improved/rectified by the Contractor except items (80709-O01, O02, R04 – R16 and G17). Follow-up action is needed for the outstanding items.	



	Reminders	Related Item No.
	The Contractor was reminded to implement the following preventive measures:	
	<b>A. Water Quality</b>	
80717-R06	• Drying out the standing water at <b>STR8</b> .	B11
80717-R07	• Hydroseed/cover the exposed slope with tarpaulin at underneath <b>STR10-13</b> .	B8
80717-R08	• Hydroseed/cover the exposed surface at <b>STR14</b> .	B8
80717-R10	• Clear the stagnant water in the discarded sedimentation tanks near the catchwater.	B11
80717-R11	• Clear C&D waste and sediment near catchwater.	B18
80717-R13	• Properly cover the exposed surface at <b>SD10-19</b> when it is not in works.	B8
80717-R14	• Clear sediment and debris at the paved road at <b>CH4300 (Existing TCR)</b> .	B18
80717-R15	• Re-arrange the stream diversion at <b>Stream 19</b> . (in-progress)	B15
80717-R17	• Keep clear the sediment at the culvert at <b>RW6</b> .	B18
	<b>B. Air Quality</b>	
80717-R05	• Properly cover the stockpile at between <b>STR7-8</b> .	C7
80717-R07	• Hydroseed/cover the exposed slope with tarpaulin at underneath <b>STR10-13</b> .	C13
80717-R08	• Hydroseed/cover the exposed surface at <b>STR14</b> .	C13
80717-R12	• Properly cover the stockpile at <b>old TCR</b> when it is not in works.	C7



Weekly Site Inspection Record Summary

80717-R16	• Hydroseed the exposed surface at STR6.	C13
<b>C. Waste / Chemical Management</b>		
80717-R04	• Provide drip tray for the oil container at the entrance of STR7.	E7ii.
80717-R09	• Clear discarded plants at underneath between STR13-14.	E4ii.
80717-R11	• Clear C&D waste and sediment near catchwater.	E4ii.
<b>D. General</b>		
80717-G18	• Keep clear sediment, stones and debris in the culvert, U-Channel and gullies etc (Drainage system).	B1

Ref. No.	Proposed Completion Date	Completion Date	Remarks
80709-O03	17 July 2008	17 July 2008	Rectified
80717-O01	24 July 2008		Follow Up Required
80717-O02			
80717-O03			
80717-R04			
80717-R05			
80717-R06			
80717-R07			
80717-R08			
80717-R09			
80717-R10			
80717-R11			
80717-R12			
80717-R13			
80717-R14			
80717-R15			
80717-R16			
80717-R17			
80717-G18			

	Name	Signature	Date
Recorded by	Ivy Tam		17 July 2008
Checked by	Dr. Priscilla Choy		17 July 2008

Weekly Site Inspection Record Summary

Inspection Information

Checklist Reference Number	80724
Date	24 July 2008 (Thursday)
Time	9:00 – 13:00



Ref. No.	Non-Compliance	Related Item No.
-	None identified	-
Ref. No.	Remarks/Observations	Related Item No.
	<b>A. Water Quality</b>	
80724-O01	• Sediment was observed accumulate at the sedimentation tanks at <b>Shan Shek Wan</b> . The Contractor was reminded to clear the silt and sediment to maintain the tank can function properly.	B5iii & iv.
80724-O02	• Silt water was observed discharging to the U-Channel at underneath <b>STR7</b> while the upstream water has been diverted. The Contractor was reminded to provide mitigation measures to prevent any silty water from discharging out.	B5i.
	<b>B. Air Quality</b>	
	• No environmental deficiency was identified during site inspection.	
	<b>C. Noise</b>	
	• No environmental deficiency was identified during site inspection.	
	<b>D. Waste / Chemical Management</b>	
	• No environmental deficiency was identified during site inspection.	
	<b>E. Ecology</b>	
	• No environmental deficiency was identified during site inspection.	
	<b>F. Others</b>	
	• All environmental deficiencies identified in previous audit session were improved/rectified by the Contractor except items (80717-O01 – O03, R4, R5, R7, R8, R11, R13, R14, R16 and R17). Follow-up action is needed for the outstanding items.	

	Reminders	Related Item No.
	The Contractor was reminded to implement the following preventive measures:	
	<b>A. Water Quality</b>	
80724-R05	• Provide mitigation measures to prevent silty water running in the underground channel at <b>STR7</b> .	B1
80724-R06	• Hydroseed/cover the exposed slope with tarpaulin at underneath <b>STR10-13</b> .	B8
80724-R07	• Hydroseed/cover the exposed surface at <b>STR14</b> .	B8
80724-R08	• Clear sediment and C&D waste near catchwater.	B18
80724-R09	• Properly cover the catchment channel near the construction works.	B1
80724-R10	• Properly cover the exposed surface at <b>SD10-19</b> when it is not in works.	B8
80724-R11	• Clear sediment and debris at the paved road at <b>CH4300 (Existing TCR)</b> .	B18
80724-R12	• Keep clear the sediment at the culvert at <b>RW6</b> .	B18
80724-R15	• Clear standing water at <b>CH4300 (Existing TCR)</b> .	B11
	<b>B. Air Quality</b>	
80724-R04	• Properly cover the stockpile at between <b>STR7-8</b> when it is not in work.	C7
80724-R06	• Hydroseed/cover the exposed slope with tarpaulin at underneath <b>STR10-13</b> .	C13
80724-R07	• Hydroseed/cover the exposed surface at <b>STR14</b> .	C13
80724-R13	• Hydroseed the exposed surface at <b>STR6</b> .	C13

Weekly Site Inspection Record Summary

C. Waste / Chemical Management		
80724-R03	• Clear discarded cement bags (abandon) at STR7.	E4ii.
80724-R08	• Clear sediment and C&D waste near catchwater.	E4ii.
80724-R14	• Provide drip tray for the oil container at the entrance of STR7.	E7ii.

Ref. No.	Proposed Completion Date	Completion Date	Remarks
80717-R06	24 July 2008	24 July 2008	Rectified
80717-R09			
80717-R10			
80717-R12			
80717-R15			
80717-G18			
80724-O01	31 July 2008		Follow Up Required
80724-O02			
80724-R03			
80724-R04			
80724-R05			
80724-R06			
80724-R07			
80724-R08			
80724-R09			
80724-R10			
80724-R11			
80724-R12			
80724-R13			
80724-R14			
80724-R15			

	Name	Signature	Date
Recorded by	Ivy Tam		24 July 2008
Checked by	Dr. Priscilla Choy		24 July 2008

Weekly Site Inspection Record Summary

Inspection Information

Checklist Reference Number	80731
Date	31 July 2008 (Thursday)
Time	9:00 – 12:30



Ref. No.	Non-Compliance	Related Item No.
-	None identified	-
Ref. No.	Remarks/Observations	Related Item No.
	<b>A. Water Quality</b>	
80731-001	• Sediment was observed accumulate at the sedimentation tanks at <b>Shan Shek Wan</b> . The Contractor was reminded to clear the silt and sediment to maintain the tank can function properly.	B5iii & iv.
80731-002	• Silt water was observed discharging to the U-Channel at underneath <b>STR7</b> while the upstream water has been diverted. The Contractor was reminded to provide mitigation measures to prevent any silty water from discharging out. (in-progress)	B5i.
	<b>B. Air Quality</b>	
	• No environmental deficiency was identified during site inspection.	
	<b>C. Noise</b>	
	• No environmental deficiency was identified during site inspection.	
	<b>D. Waste / Chemical Management</b>	
	• No environmental deficiency was identified during site inspection.	
	<b>E. Ecology</b>	
	• No environmental deficiency was identified during site inspection.	
	<b>F. Others</b>	
	• All environmental deficiencies identified in previous audit session were improved/rectified by the Contractor except items (80724-001 – 002, R3, R4, R6 – R14). Follow-up action is needed for the outstanding items.	

	Reminders	Related Item No.
	The Contractor was reminded to implement the following preventive measures:	
	<b>A. Water Quality</b>	
80731-R03	• Clear the silt at drainage channel at the entrance of <b>STR7</b> .	B1
80731-R09	• Hydroseed/cover the exposed slope with tarpaulin at underneath <b>STR10-13</b> .	B8
80731-R11	• Hydroseed/cover the exposed surface at <b>STR14</b> .	B8
80731-R14	• Clear sediment and debris near catchment.	B18
80731-R15	• Properly cover the catchment channel near the construction works.	B1
80731-R16	• Properly cover the exposed surface at <b>SD10-19</b> when it is not in works.	B8
80731-R17	• Clear sediment and debris at the paved road along existing TCR.	B18
80731-R18	• Keep clear the sediment at the culvert at <b>RW6</b> .	B18
	<b>B. Air Quality</b>	
80731-R07	• Properly cover the stockpile at <b>STR7-8</b> when it is not in works.	C7
80731-R08	• Clear the stockpile of cement at <b>STR9A</b> .	C7
80731-R09	• Hydroseed/cover the exposed slope with tarpaulin at underneath <b>STR10-13</b> .	C13
80731-R11	• Hydroseed/cover the exposed surface at <b>STR14</b> .	C13
80731-R19	• Hydroseed the exposed surface at <b>STR6</b> .	C13

Weekly Site Inspection Record Summary

C. Waste / Chemical Management		
80731-R04	• Provide drip tray for the oil container at the entrance of STR7.	E7ii.
80731-R05	• Clear the C&D waste and sediment at the U-channel at underneath STR7.	E4ii.
80731-R06	• Clear discarded cement bags (abandon) at STR7.	E4ii.
80731-R10	• Clear C&D waste near Stream 19(downstream), Stream 28, Stream 29 and Stream 34.	E4ii.
80731-R12	• Clear discarded plants at underneath STR13.	E4ii.
80731-R13	• Clear discarded cement bags (abandon) at RW28.	E4ii.

Ref. No.	Proposed Completion Date	Completion Date	Remarks
80724-R05	31 July 2008	31 July 2008	Rectified
80724-R15			
80731-O01	6 August 2008		Follow Up Required
80731-O02			
80731-R03			
80731-R04			
80731-R05			
80731-R06			
80731-R07			
80731-R08			
80731-R09			
80731-R10			
80731-R11			
80731-R12			
80731-R13			
80731-R14			
80731-R15			
80731-R16			
80731-R17			
80731-R18			
80731-R19			

	Name	Signature	Date
Recorded by	Ivy Tam		31 July 2008
Checked by	Dr. Priscilla Choy		31 July 2008

---

---

**APPENDIX J  
ENVIRONMENTAL MITIGATION  
IMPLEMENTATION SCHEDULE (EMIS)**

---

---

**Appendix J - Summary of Environmental Mitigation Implementation Schedule**

Types of Impacts	Mitigation Measures	Status
<p style="text-align: center;"><b>Construction Dust</b></p>	<ul style="list-style-type: none"> <li>• A stockpile of dusty materials should not extend beyond the pedestrian barriers, fencing or traffic cones.</li> </ul>	*
	<ul style="list-style-type: none"> <li>• Vehicle washing facilities should be provided at every exit point.</li> </ul>	^
	<ul style="list-style-type: none"> <li>• The area where vehicle washing takes place and the section of the road between the washing facilities and the exit point should be paved with concrete, bituminous materials or hardcores.</li> </ul>	^
	<ul style="list-style-type: none"> <li>• Where a site boundary adjoins a road, street, service lane or other area accessible to the public, hoarding of not less than 2.4m high from ground level should be provided along the entire length of that portion of the site boundary except for a site entrance or exit.</li> </ul>	N/A
	<ul style="list-style-type: none"> <li>• Every main haul road should be sprayed with water or a dust suppression chemical so as to maintain the entire road surface wet.</li> </ul>	^
	<ul style="list-style-type: none"> <li>• The portion of any road leading only to a construction site that is within 30m of a discernible or designated vehicle entrance or exit should be kept clear of dusty materials.</li> </ul>	^
	<ul style="list-style-type: none"> <li>• Any stockpile of dusty materials should be either covered entirely by impervious sheeting, placed in an area sheltered on the top and the 3 sides or sprayed with water or a dust suppression chemical so as to maintain the entire surface wet.</li> </ul>	*
	<ul style="list-style-type: none"> <li>• During cement debagging or concrete batching operation in an area sheltered on top and 3 sides.</li> </ul>	^
	<ul style="list-style-type: none"> <li>• All dusty materials should be sprayed with water or a dust suppression chemical immediately prior to any loading, unloading or transfer operation so as to maintain the dusty materials wet.</li> </ul>	^
	<ul style="list-style-type: none"> <li>• Every vehicle should be washed to remove any dusty materials from its body and wheels immediately before leaving a construction site.</li> </ul>	^
	<ul style="list-style-type: none"> <li>• The working area of any excavation should be sprayed with water or a dust suppression chemical immediately before, during and immediately after the operation so as to maintain the entire surface wet.</li> </ul>	^
	<ul style="list-style-type: none"> <li>• Proper enclosures and water spraying should be implemented for the main dust-generating activities, such as soil nailing or piling works.</li> </ul>	^
	<ul style="list-style-type: none"> <li>• Proper plant maintenance should be provided to avoid black smoke emission from plants/equipment.</li> </ul>	^

Types of Impacts	Mitigation Measures	Status		
Construction Noise	<ul style="list-style-type: none"> <li>• Only well-maintained plant should be operated on –site and plant should be serviced regularly during the construction works.</li> <li>• Machines and plant that may be in intermittent use should be shut down between work periods or should be throttled down to a minimum.</li> <li>• Plant know to emit noise strongly in one direction, should where possible, be orientated to direct noise away from the NSRS.</li> <li>• Mobile plant should be sited as far away from NSRs as possible.</li> <li>• Material stockpiles and other structures should be effectively utilised, where practicable, to screen noise from on-site construction activities.</li> <li>• Use quite plant and Working Method</li> <li>• Reduce the number of plant operating in critical areas close NSRs.</li> <li>• Construct temporary and movable noise barriers</li> </ul>	^ ^ ^ ^ ^ ^ N/A		
		Water Quality	<i>Construction Runoff and Drainage</i>	
			<ul style="list-style-type: none"> <li>• Discharges to natural water courses shall only take place when the effluent can be shown to comply with the standards specified in the Technical Memorandum, Standards for Effluents Discharged in to Drainage and Sewerage Systems, Inland and Coastal Waters. Discharges in the water gathering grounds should meet Group A standard for inland waters.</li> </ul>	^
			<ul style="list-style-type: none"> <li>• Use of sediment traps and the adequate maintenance of drainage systems to prevent flooding and overflow.</li> <li>• Boundaries of critical areas of earthworks should be marked and surrounded by dykes or embankments for flood protection. Temporary ditches should be provided to facilities runoff discharge into the appropriate watercourses, via a silt retention pond. Permanent drainage channels should incorporate sediment basins or traps and baffles to enhance deposition rates.</li> <li>• All temporary and permanent drainage pipes and culverts provided to facilitate runoff discharge should be adequately designed for the controlled release of storm flows. All sediment traps should be regularly cleaned and maintained. The temporarily diverted drainage should be reinstated to its original condition when the construction works has finished or the temporary diversion is no longer required</li> <li>• Sand silt in the wash water from the wheel washing facilities, which ensure no earth, mud and debris is deposited on roads, should be settled out the removed before discharging into storm drains. A section of the road between the wheel washing bay and the public road should be paved with backfill to prevent wash water or other site runoff form entering public road drains.</li> <li>• Oil interceptors should be provided in the drainage system and regularly emptied to prevent the release of oils and grease into the storm water drainage system after accidental spillage. The interceptor should have a bypass to prevent flushing during periods of heavy rain.</li> <li>• Catchpits and perimeter channels shall be constructed in advance of site formation works and earthworks.</li> <li>• Silt removal facilities, channels and manholes shall be suitably maintained with the deposited silt and grit being removed at least once a week, and at the onset of and after each rainstorm to ensure that these facilities are functioning properly at all times.</li> </ul>	^
				^
				*
				^
	N/A			
	^			
	*			



Types of Impacts	Mitigation Measures	Status
	<ul style="list-style-type: none"> <li>Earthworks final surfaces shall be well compacted and the subsequent permanent work or surface protection shall be carried out immediately after the final surfaces are formed to prevent erosion caused by rainstorms. Appropriate intercepting channels shall be provided along the site boundary or at the locations agreed with the ET Leader. Rainwater pumped out from trenches or foundation excavations shall be discharged into silt removal facilities before discharge into storm drains.</li> <li>All generators, fuel and oil storage shall be within bunded areas. Drainage from the areas shall be connected to storm drains via a petrol interceptor.</li> </ul>	<p>^</p> <p>*</p>
	<p><i>Tunnelling Work</i></p> <ul style="list-style-type: none"> <li>Temporary open storage of excavated materials should be covered with tarpaulin or similar fabric during rainstorms. Any washout of construction or excavated materials from the drill and blast tunnelling work should be diverted to the drainage system via appropriate sediment traps.</li> <li>Ground water pumped out of tunnels should be discharged into the drainage channels which incorporated sediment traps to enhance deposition rates and to remove silt.</li> <li>Spend grouts used in diaphragm wall construction should be collected in a separate slurry collection system, reconditioned and reused wherever practicable. The disposal of used grouting materials will only be permitted if it is treated to the TM standards before discharge to the storm drains or disposal to landfill.</li> </ul>	<p>N/A</p> <p>N/A</p> <p>N/A</p>
	<p><i>General Construction Activities</i></p>	
	<ul style="list-style-type: none"> <li>Debris and rubbish on site should be collected, handled and disposed of properly to avoid entering the water column and cause water quality impacts.</li> <li>All fuel tanks and storage areas will be provided with locks and be located on sealed areas (within bunds of a capacity equal to 110% of the storage capacity of the largest tank or 20% by volume of the fuel stored in that areas, whichever in the greatest).</li> </ul>	<p>*</p> <p>*</p>
	<p><i>Sewage Effluent</i></p> <ul style="list-style-type: none"> <li>Construction work force sewage discharges from fixed toilet facilities on-site should be connected to the nearby existing trunk sewer wherever feasible. However, for areas where existing trunk sewer is not available, it is recommended that appropriate and adequate on site portable chemical toilets should be provided by a licensed contractor who will be responsible for appropriate disposal and maintenance of these facilities.</li> <li>It is considered that sewage discharges could also be treated by on-site septic tanks and soakaway. Minimum clearance away from streams and catchments and other requirements for the proposed septic tank and soakaway should be referred to EPD's Practice Note for Professional Persons, Drainage Plans.</li> </ul>	<p>^</p> <p>N/A</p>

Types of Impacts	Mitigation Measures	Status
Waste / Chemical	<i>General</i>	
	<ul style="list-style-type: none"> <li>• Training and instruction shall be given at a site to construction staff to increase awareness and draw attention to waste management issues and the need to minimise waste generation. The training requirement shall be included in the site waste management plan.</li> </ul>	^
	<i>Storage, Collection and Transportation of Waste</i>	
	<ul style="list-style-type: none"> <li>• Wastes shall be handled and stored in a manner to ensure that they are held securely without loss or leakage.</li> </ul>	^
	<ul style="list-style-type: none"> <li>• Authorised or licensed waste hauliers shall be used and they shall only collect wastes prescribed by their permits.</li> </ul>	^
	<ul style="list-style-type: none"> <li>• Waste shall be removed on a daily basis.</li> </ul>	^
	<ul style="list-style-type: none"> <li>• Waste storage area shall be maintained and cleaned on a daily basis.</li> </ul>	^
	<ul style="list-style-type: none"> <li>• Windblown litter and dust during transportation shall be minimised by either covering trucks or transporting wastes in enclosed containers.</li> </ul>	^
	<ul style="list-style-type: none"> <li>• Obtain necessary waste disposal permits from the appropriate authorities if they are required.</li> </ul>	^
	<ul style="list-style-type: none"> <li>• Wastes shall be disposed of at licensed waste disposal facilities.</li> </ul>	^
<ul style="list-style-type: none"> <li>• Develop procedure such as ticketing system to facilitate tracking of loads, particularly for chemical waste, and to ensure that illegal disposal of wastes does not occur.</li> </ul>	^	
<ul style="list-style-type: none"> <li>• Maintain records of the quantities of wastes generated, recycled and disposed.</li> </ul>	^	
<i>Surplus Excavated Materials</i>		
<ul style="list-style-type: none"> <li>• Due to the high risk of loose material being washed into the existing nullah, stockpile materials should be properly compacted and covered from water erosion and located at least 10m away from the nullah wall.</li> </ul>	^	
<i>Construction and Demolition (C&amp;D) Waste</i>		
<ul style="list-style-type: none"> <li>• Careful design, planning and good site management shall be adopted to minimise over-ordering and generation of waste materials such as concrete grouts.</li> </ul>	^	
<ul style="list-style-type: none"> <li>• The handling and disposal of bentonite slurries shall be undertaken in accordance with Practice Note for Professional Persons – Construction Site Drainage (ProPECC PN 1/94) on construction site drainage.</li> </ul>	N/A	
<ul style="list-style-type: none"> <li>• Construction and demolition (C&amp;D) material shall be segregated to inert and non-inert parts. The inert portion shall re-used at areas of reclamation or land formation, or to public filling area shall such allocation is deemed necessary. The non-inert portion shall be disposed of to landfill.</li> </ul>	*	
<i>Chemical Waste</i>		
<ul style="list-style-type: none"> <li>• Chemical waste that is produce during construction shall be handled in accordance with the Code of Practice on the Packaging, Handling and Storage of Chemical Wastes.</li> </ul>	^	

Types of Impacts	Mitigation Measures	Status
	<ul style="list-style-type: none"> <li>• Containers used for the storage of chemical wastes should:               <ol style="list-style-type: none"> <li>a. Be suitable for the substance they are holding, resistant to corrosion, maintained in a good condition, and securely closed;</li> <li>b. Have a capacity of less than 450 litres unless the specifications have been approved by the EPD;</li> <li>c. Display a label in English and Chinese in accordance with instructions prescribed in Schedule 2 of the Chemical Waste Regulations.</li> </ol> </li> <li>• The storage area for chemical wastes should:               <ol style="list-style-type: none"> <li>a. Be clearly labelled and used solely for the storage of chemical waste;</li> <li>b. Be enclosed on at least 3 sides;</li> <li>c. Have an impermeable floor and bunding of capacity to accommodate 110% of the volume of the largest container or 20% by volume of the chemical waste stored in the area, whichever is largest;</li> <li>d. Have adequate ventilation;</li> <li>e. Be covered to prevent rainfall entering (water collected within the bund must be tested and disposed as chemical waste if necessary);</li> <li>f. Be arranged so that incompatible materials are adequately separated.</li> </ol> </li> <li>• Disposal of chemical waste shall be via a licensed waste collector; and to a facility licensed to receive chemical waste; or a re-user of the waste (under approval from EPD).</li> </ul>	<p style="text-align: center;">^</p> <p style="text-align: center;">^</p> <p style="text-align: center;">^</p>
	<p><i>General Refuse</i></p> <ul style="list-style-type: none"> <li>• General refuse generated on-site shall be stored in enclosed bins or compaction unit separate from C&amp;D and chemical wastes. A reputable waste collector shall be employed by the contractor to remove general refuse from the site, separately from C&amp;D and chemical wastes, on a daily for every second day basis to minimise odour, pest and litter impacts. The burning of refuse on construction sites is prohibited by law.</li> <li>• Reusable rather than disposable dishware shall be used if feasible.</li> </ul>	<p style="text-align: center;">^</p> <p style="text-align: center;">^</p>
	<p><i>Oil and Fuel</i></p> <ul style="list-style-type: none"> <li>• The storage area for chemical wastes should have an impermeable floor and bunding of capacity to accommodate 110% of the volume of the largest container;</li> <li>• No storage of oil or fuel should be stored within the Country Park or the water gathering ground.</li> </ul>	<p style="text-align: center;">*</p> <p style="text-align: center;">^</p>
<p><b>Landscape and Visual Impact</b></p>	<ul style="list-style-type: none"> <li>• Refinement of the route alignment and design of associated structures to minimise loss of woodland and other landscape resources;</li> <li>• Minimising working areas as far as possible;</li> <li>• Protection and retention of existing vegetation where possible;.</li> <li>• Transplanting of trees where appropriate</li> <li>• Protection and retention of existing natural rocky outcrops, slope profiles, vegetation, landscape features;</li> <li>• Advance planting and visual screening, where possible;</li> </ul>	<p style="text-align: center;">^</p> <p style="text-align: center;">^</p> <p style="text-align: center;">^</p> <p style="text-align: center;">^</p> <p style="text-align: center;">^</p> <p style="text-align: center;">^</p>

Types of Impacts	Mitigation Measures	Status
	<ul style="list-style-type: none"> <li>• Compensatory planting;</li> <li>• Sensitively designed site hoarding, where possible (ie the sensitive design of site hoarding will be disrupted by hoarding panels showing the Highways Department logo, at regular intervals as per the approved engineering design);and</li> <li>• Grassing and woodland planting of soil slopes and disturbed areas</li> </ul>	<p style="text-align: center;">^</p> <p style="text-align: center;">^</p> <p style="text-align: center;">^</p>
<b>Ecology</b>	<ul style="list-style-type: none"> <li>• Construction activities in the stream and other disturbances to it should be avoided.</li> </ul>	<p style="text-align: center;">^</p>

Remarks:

- |   |   |
|---|---|
| <ul style="list-style-type: none"> <li>^ Compliance of mitigation measure;</li> <li>N/A Not Applicable;</li> <li>* Recommendation was made during site audit but improved/rectified by the contractor.</li> </ul> | <ul style="list-style-type: none"> <li>X Non-compliance of mitigation measure;</li> <li>• Non-compliance but rectified by the contractor;</li> <li># Non-compliance but rectified/improved by the contractor and awaiting IEC's further comment;</li> </ul> |
|---|---|

---

---

**APPENDIX K  
EVENT ACTION PLANS**

---

---

## Appendix K – Event Action Plans

### Event /Action Plan for Air Quality

EVENT	ACTION			
	ET	IEC	ER	Contractor
<i>Action Level</i>				
1. Exceedance for one sample	<ol style="list-style-type: none"> <li>1. Inform the IEC and the Contractor about the exceedance within 24 hours of identification of exceedance;</li> <li>2. Identify the source, investigate the causes of exceedance and propose remedial measures;</li> <li>3. Report the results of the investigation to the Contractor;</li> <li>4. Prepare Notification of Exceedance (NOE) to inform the Contractor, the IEC, the ER and the EPD within 24 hours of identification of exceedance.</li> <li>5. Repeat measurement to confirm finding.</li> <li>6. If exceedance is indicated due to the Project construction works, increase 24-hour TSP monitoring frequency to 1-hour monitoring with 3 times every six days until no exceedance is recorded.</li> </ol>	<ol style="list-style-type: none"> <li>1. Check monitoring data submitted by the ET.</li> <li>2. Confirm the ET assessment regarding the action and/or limit level exceedance during the impact monitoring;</li> <li>3. Check Contractor's working method.</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm receipt of NOE in writing.</li> <li>2. Notify EPD and other relevant Government departments within 24 hours of identification of exceedance.</li> </ol>	<ol style="list-style-type: none"> <li>1. Inform IEC and ER within 24 hours of identification of exceedance;</li> <li>2. Submit proposals for remedial to ER within 3 working days of notification ET if exceedance is due to the Project construction works;</li> <li>3. Rectify any unacceptable practice;</li> <li>4. Amend working methods if appropriate and within reasonable time scale if exceedance is due to the Project construction works.</li> </ol>

EVENT	ACTION			
	ET	IEC	ER	Contractor
<i>Action Level</i>				
2. Exceedance for two or more consecutive samples	<ol style="list-style-type: none"> <li>1. Inform the IEC and the Contractor about the exceedance within 24 hours of identification of exceedance;</li> <li>2. Identify the source.</li> <li>3. Supervise implementation of remedial measures;</li> <li>4. Report the results of the investigation to the Contractor;</li> <li>5. Advise the ER on the effectiveness of the proposed remedial measures;</li> <li>6. Repeat measurements to confirm findings;</li> <li>7. Increase monitoring frequency to daily;</li> <li>8. Discuss with the IEC and the Contractor on remedial actions required;</li> <li>9. If exceedance continues, arrange meeting with the IEC and the ER.</li> <li>10. If exceedance stops, cease additional monitoring.</li> </ol>	<ol style="list-style-type: none"> <li>1. Check monitoring data submitted by the ET;</li> <li>2. Check the Contractor's working method;</li> <li>3. Discuss with the ET and the Contractor on possible remedial measures;</li> <li>4. Advise the ER on the effectiveness of the proposed remedial measures;</li> <li>5. Supervise implementation of remedial measures.</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm receipt of NOE in writing.</li> <li>2. Notify the EPD and other relevant Government departments within 24 hours of identification of exceedance;</li> <li>3. Ensure remedial measures properly implemented.</li> </ol>	<ol style="list-style-type: none"> <li>1. Inform IEC and ER within 24 hours of identification of exceedance;</li> <li>2. Submit proposals for remedial actions to IEC within 3 working days of notification;</li> <li>3. Implement the agreed proposals;</li> <li>4. Amend proposal if appropriate.</li> </ol>

EVENT	ACTION			
	ET	IEC	ER	Contractor
<i>Limit Level</i>				
1. Exceedance for one sample	<ol style="list-style-type: none"> <li>1. Notify the IEC and the Contractor within 24 hours of identification of exceedance;</li> <li>2. Identify the source, investigate the causes of exceedance and propose remedial measures;</li> <li>3. Prepare Notification of Exceedance (NOE) to inform the Contractor, the IEC, the ER and the EPD within 24 hours of identification of exceedance.</li> <li>4. Repeat measurement to confirm finding.</li> <li>5. If exceedance is indicated due to the Project construction works, increase 24-hour TSP monitoring frequency to 1-hour monitoring with 3 times every six days until no exceedance is recorded;</li> <li>6. Assess effectiveness of Contractor's remedial actions and keep the IEC, the DEP and the ER informed of the results.</li> </ol>	<ol style="list-style-type: none"> <li>1. Check monitoring data submitted by the ET.</li> <li>2. Check Contractor's working method.</li> <li>3. Discuss with the ET, the Contractor and the ER on possible remedial measures.</li> <li>4. Advise the ER on the effectiveness of the proposed remedial measures.</li> <li>5. Supervise implementation of remedial measures.</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm receipt of notification of exceedance in writing;</li> <li>2. Notify EPD and other relevant Government departments within 24 hours of identification of exceedance;</li> <li>3. Ensure remedial measures are properly implemented.</li> </ol>	<ol style="list-style-type: none"> <li>1. Inform ER and IEC within 24 hours of identification of exceedance;</li> <li>2. Take immediate action to avoid further exceedance;</li> <li>3. Submit proposals for remedial actions to ER and IEC within 3 working days of notification by ET;</li> <li>4. Implement the agreed proposals;</li> <li>5. Report effectiveness of remedial actions to IEC and ER;</li> <li>6. Amend proposal if appropriate.</li> </ol>



EVENT	ACTION			
	ET	IEC	ER	Contractor
2. Exceedance for two or more consecutive samples	<ol style="list-style-type: none"> <li>1. Notify the IEC and the Contractor within 24 hours of identification of exceedance;</li> <li>2. Identify the source;</li> <li>3. Repeat measurements to confirm findings if the exceedance is due to the Project construction works;</li> <li>4. Increase monitoring frequency to daily;</li> <li>5. Carry out analysis of the Contractor's working procedures to determine possible mitigation to be implemented;</li> <li>6. Arrange meeting with the IEC and the ER to discuss the remedial actions to be taken;</li> <li>7. Assess effectiveness of the Contractor's remedial actions and keep the IEC, the DEP and the ER informed of the results;</li> <li>8. If exceedance stops, cease additional monitoring.</li> </ol>	<ol style="list-style-type: none"> <li>1. Discuss amongst the ER, ET and the Contractor on the potential remedial actions;</li> <li>2. Review the Contractor's remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly;</li> <li>3. Supervise the implementation of remedial measures.</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm receipt of notification of failure in writing;</li> <li>2. Notify the EPD and other relevant Government departments within 24 hours of identification of exceedance;</li> <li>3. In consultation with the IEC, agree with the Contractor on the remedial measures to be implemented;</li> <li>4. Ensure remedial measures are properly implemented;</li> <li>5. If exceedance continues, consider what activity of the work is responsible and instruct the Contractor to stop that activity of work until the exceedance is abated.</li> </ol>	<ol style="list-style-type: none"> <li>1. Inform ER and IEC within 24 hours of identification of exceedance;</li> <li>2. Take immediate action to avoid further exceedance;</li> <li>3. Submit proposals for remedial actions to IEC within 3 working days of notification by ET;</li> <li>4. Arrange meeting with IEC and ER to discuss the remedial actions to be taken;</li> <li>5. Implement the agreed proposals;</li> <li>6. Resubmit proposals if problem still not under control;</li> <li>7. Report effectiveness of remedial actions to IEC and ER;</li> <li>8. Stop the relevant activity of works as determined by the ER until the exceedance is abated.</li> </ol>

Note: ET – Environmental Team, IEC – Independent Environmental Checker, ER – Engineer's Representative

Event Action Plan for Construction Noise

EVENT	ACTION			
	ET	IEC	ER	Contractor
Action Level	<ol style="list-style-type: none"> <li>1. Notify the IEC and the Contractor within 24 hours of identification of exceedance.</li> <li>2. Carry out investigation.</li> <li>3. Report the results of investigation to the IEC and the Contractor.</li> <li>4. Prepare Notification of Exceedance (NOE) to inform the Contractor, the IEC, the ER and the EPD within 24 hours of identification of exceedance.</li> <li>5. Discuss with the Contractor and formulate remedial measures.</li> <li>6. Increase monitoring frequency to check mitigation effectiveness.</li> </ol>	<ol style="list-style-type: none"> <li>1. Review the analysed results submitted by the ET.</li> <li>2. Review the proposed remedial measures by the Contractor and advise the ER accordingly.</li> <li>3. Supervise the implementation of remedial measures.</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm receipt of NOE in writing.</li> <li>2. Notify the EPD and other relevant Government departments within 24 hours of identification of exceedance.</li> <li>3. Require the Contractor to propose remedial measures for the analysed noise problem.</li> <li>4. Ensure remedial measures are properly implemented.</li> </ol>	<ol style="list-style-type: none"> <li>1. Submit noise mitigation proposals to IEC</li> <li>2. Implement noise mitigation proposals</li> </ol>

EVENT	ACTION			
	ET	IEC	ER	Contractor
Limit Level	<ol style="list-style-type: none"> <li>1. Notify the IEC and the Contractor within 24 hours of identification of exceedance.</li> <li>2. Identify the source.</li> <li>3. Repeat measurement to confirm findings.</li> <li>4. Increase monitoring frequency.</li> <li>5. Prepare Notification of Exceedance (NOE) to inform the Contractor, the IEC, the ER and the EPD within 24 hours of identification of exceedance.</li> <li>6. Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented.</li> <li>7. Inform the IEC, the ER and the DEP the causes &amp; actions taken for the exceedances.</li> <li>8. Assess effectiveness of the Contractor's remedial actions and keep the IEC, the DEP and the ER informed of the results.</li> <li>9. If exceedance stops, cease additional monitoring.</li> </ol>	<ol style="list-style-type: none"> <li>1. Discuss amongst the ER, the ET and the Contractor on the potential remedial actions.</li> <li>2. Review the Contractor's remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly.</li> <li>3. Supervise the implementation of remedial measures.</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm receipt of NOE in writing.</li> <li>2. Notify the EPD and other relevant Government departments within 24 hours of identification of exceedance.</li> <li>3. Require the Contractor to propose remedial measures for the analysed noise problem.</li> <li>4. Ensure remedial measures are properly implemented.</li> <li>5. If exceedance continues, consider what activity of the work is responsible and instruct the Contractor to stop that activity of work until the exceedance is abated.</li> </ol>	<ol style="list-style-type: none"> <li>1. Take immediate action to avoid further exceedance</li> <li>2. Submit proposals for remedial actions to IEC within 3 working days of notification</li> <li>3. Implement the agreed proposals</li> <li>4. Resubmit proposals if problem still not under control</li> <li>5. Stop the relevant activity of works as determined by the ER until the exceedance is abated.</li> </ol>

Note: ET – Environmental Team, IEC – Independent Environmental Checker, ER – Engineer's Representative

## Event / Action Plan for Water Quality

EVENT	ACTION			
	ET	IEC	ER	Contractor
Action Level being exceeded by one sampling day	<ol style="list-style-type: none"> <li>1. Repeat in-situ measurement to confirm findings;</li> <li>2. Identify source(s) of impact;</li> <li>3. Inform the IEC and the Contractor;</li> <li>4. Prepare Notification of Exceedance (NOE) to inform the Contractor, the IEC, the ER and the EPD with 24 hours of identification of exceedance.</li> <li>5. Check monitoring data, all plant, equipment and the Contractor's working methods;</li> <li>6. Discuss mitigation measures with the IEC and the Contractor;</li> <li>7. Repeat measurement on next day of exceedance.</li> </ol>	<ol style="list-style-type: none"> <li>1. Discuss with the ET and the Contractor on the mitigation measures;</li> <li>2. Review proposals on mitigation measures submitted by the Contractor and advise the ER accordingly;</li> <li>3. Assess the effectiveness of the implemented mitigation measures.</li> </ol>	<ol style="list-style-type: none"> <li>1. Discuss with the IEC on the proposed mitigation measures;</li> <li>2. Make agreement on the mitigation measures to be implemented.</li> </ol>	<ol style="list-style-type: none"> <li>1. Inform the ER and confirm notification of the non-compliance in writing;</li> <li>2. Rectify unacceptable practice;</li> <li>3. Check all plant and equipment;</li> <li>4. Consider changes of working methods;</li> <li>5. Discuss with the ET and the IEC and propose mitigation measures to the IEC and the ER;</li> <li>6. Implement the agreed mitigation measures.</li> </ol>
Action Level being exceeded by more than one consecutive sampling days	<ol style="list-style-type: none"> <li>1. Repeat in-situ measurement to confirm findings;</li> <li>2. Identify source(s) of impact;</li> <li>3. Inform the IEC and the Contractor;</li> <li>4. Check monitoring data, all plant, equipment and Contractor's working methods;</li> <li>5. Discuss mitigation measures with the IEC and the Contractor;</li> <li>6. Ensure mitigation measures are implemented;</li> <li>7. Prepare to increase the monitoring frequency to daily;</li> </ol>	<ol style="list-style-type: none"> <li>1. Discuss with the ET and the Contractor on the mitigation measures;</li> <li>2. Review proposals on mitigation measures submitted by the Contractor and advise the ER accordingly;</li> <li>3. Assess the</li> </ol>	<p>Discuss with IEC on the proposed mitigation measures;</p> <p>Make agreement on the mitigation measures to be implemented;</p> <p>Access the effectiveness of the implemented mitigation measures.</p>	<ol style="list-style-type: none"> <li>1. Inform the ER and confirm notification of the non-compliance in writing;</li> <li>2. Rectify unacceptable practice;</li> <li>3. Check all plant and equipment;</li> <li>4. Consider changes of working methods;</li> <li>5. Discuss with the ET and the IEC and propose mitigation measures to the IEC and ER within 3 working days;</li> <li>6. Implement the agreed mitigation measures.</li> </ol>

EVENT	ACTION			
	ET	IEC	ER	Contractor
	8. Repeat measurement on next day of exceedance.	effectiveness of the implemented mitigation measures.		
Limit Level being exceeded by one consecutive sampling day	<ol style="list-style-type: none"> <li>1. Repeat in-situ measurement to confirm findings;</li> <li>2. Identify source(s) of impact;</li> <li>3. Inform the IEC and the Contractor;</li> <li>4. Prepare Notification of Exceedance (NOE) to inform the Contractor, the IEC, the ER and the EPD with 24 hours of identification of exceedance.</li> <li>5. Check monitoring data, all plant, equipment and the Contractor's working methods;</li> <li>6. Discuss mitigation measures with the IEC, the ER and the Contractor;</li> <li>7. Ensure mitigation measures are implemented;</li> <li>8. Increase the monitoring frequency to daily until no exceedance of Limit Level.</li> </ol>	<ol style="list-style-type: none"> <li>1. Discuss with the ET and the Contractor on the mitigation measures;</li> <li>2. Review proposals on mitigation measures submitted by the Contractor and advise the ER accordingly;</li> <li>3. Assess the effectiveness of the implemented mitigation measures.</li> </ol>	<ol style="list-style-type: none"> <li>1. Discuss with the IEC, the ET and the Contractor on the proposed mitigation measures;</li> <li>2. Request the Contractor to critically review the working methods;</li> <li>3. Make agreement on the mitigation measures to be implemented;</li> <li>4. Assess the effectiveness of the implemented mitigation measures.</li> </ol>	<ol style="list-style-type: none"> <li>1. Inform the Engineer and confirm notification of the non-compliance in writing;</li> <li>2. Rectify unacceptable practice;</li> <li>3. Check all plant and equipment;</li> <li>4. Consider changes of working methods;</li> <li>5. Discuss with the ET, the IEC and the ER and propose mitigation measures to the IEC and the ER within 3 working days;</li> <li>6. Implement the agreed mitigation measures.</li> </ol>

EVENT	ACTION			
	ET	IEC	ER	Contractor
Limit Level being exceeded by more than one consecutive sampling days	<ol style="list-style-type: none"> <li>1. Repeat in-situ measurement to confirm findings;</li> <li>2. Identify source(s) of impact;</li> <li>3. Inform the IEC, the Contractor and DEP;</li> <li>4. Check monitoring data, all plant, equipment and Contractor's working methods;</li> <li>5. Discuss mitigation measures with the IEC, the ER and the Contractor;</li> <li>6. Ensure mitigation measures are implemented;</li> <li>7. Increase the monitoring frequency to daily until no exceedance of Limit Level for two consecutive days.</li> </ol>	<ol style="list-style-type: none"> <li>1. Discuss with ET and Contractor on the mitigation measures;</li> <li>2. Review proposals on mitigation measures submitted by the Contractor and advise the ER accordingly;</li> <li>3. Assess the effectiveness of the implemented mitigation measures.</li> </ol>	<ol style="list-style-type: none"> <li>1. Discuss with the IEC, the ET and the Contractor on the proposed mitigation measures;</li> <li>2. Request Contractor to critically review the working methods;</li> <li>3. Make agreement on the mitigation measures to be implemented;</li> <li>4. Assess the effectiveness of the implemented mitigation measures;</li> <li>5. Consider and instruct, if necessary, the Contractor to slow down or to stop all or part of the works until no exceedance of Limit Level.</li> </ol>	<ol style="list-style-type: none"> <li>1. Inform the ER and confirm notification of the non-compliance in writing;</li> <li>2. Rectify unacceptable practice;</li> <li>3. Check all plant and equipment;</li> <li>4. Consider changes of working methods;</li> <li>5. Discuss with the ET, the IEC and the ER and propose mitigation measures to the IEC and the ER within 3 working days;</li> <li>6. Implement the agreed mitigation measures;</li> <li>7. As directed by the ER, slow down or stop all or part of the construction activities.</li> </ol>

---

---

**APPENDIX L  
COMPLAINT LOGS**

---

---

**Appendix L - Complaint Log**

<b>Log Ref.</b>	<b>Location</b>	<b>Received Date</b>	<b>Details of Complaint</b>	<b>Investigation/Mitigation Action</b>	<b>Status</b>
S63	Tung Chung Road and Cheung Sha Stream	14 Sep 06	The complaint, which was lodged by Green Lantau Association on 13th September 2006, accused the failure of the site drainage system to check the discharge of silt-laden surface water from the site on that day.	ETL is of the view that the complaint is justifiable but the accusation is not substantiated by scientific data in that the rainstorm event was 1 in 25 years. It is therefore beyond the Contractor's terms of contract to design, operate and maintain the carrier pipe and the sedimentation tank to cater for this rainstorm. The Contractor has a defensible case under this increment weather condition.	Closed
S65-S69	Tung Chung Road Southern Section; Cheung Sha Stream;	19 Sep 06	Five complaints, which were lodged by Green Lantau Association on 15th September 2006, accused the failure of the drainage system for the Project on 13th September 2006. The subject of complaints are listed as below: (i) Failed Filtration System (ii) Contaminated Stream (iii) Polluted Cheung Sha Stream (iv) Polluted Cheung Sha Stream (v) Site Debris on Road	ETL is of the view that the complaints are justifiable but the accusation is not substantiated by scientific data in that the rainstorm event was 1 in 25 years. It is therefore beyond the Contractor's terms of contract to design, operate and maintain the carrier pipe and the sedimentation tank to cater for this rainstorm. The Contractor has a defensible case under this increment weather condition.	Closed



<b>Log Ref.</b>	<b>Location</b>	<b>Received Date</b>	<b>Details of Complaint</b>	<b>Investigation/Mitigation Action</b>	<b>Status</b>
S71	Northern Section, Tung Chung Road	3 Nov 06	The complaint, which was referred by Resident Site Staff (RSS) to ET on 3 <sup>rd</sup> November 2006, was raised by a resident living Lantau Island on 17 <sup>th</sup> October 2006 concerning the Tung Chung Road condition on 16 <sup>th</sup> October 2006.	<p>Based on the meteorological data extracted from HKO, the total rainfall between 0:45 and 6:45 hours in Lantau was 196 mm with an average intensity of 32.67 mm/hr on 16<sup>th</sup> October.</p> <p>Based on the results derived from Table 2 “the Intensity-Duration-Frequency (IDF) for various return periods” and Table 4 “Depth-Duration-Frequency (DDF) for durations of than 4 hours” of the “Stormwater Drainage Manual”, the return period should be less than 1 in 10 years.</p> <p>Therefore, the complaint was considered justifiable since the EIA report has recommended the provision of site drainage system shall be 1 in 10 years. The Contractor has implemented remedial measures and preventive measures.</p>	Closed
S72	Lung Tseng Tau Village, Tung Chung	3 Nov 06	The public complaint, which was referred by RSS to ET on 3 <sup>rd</sup> November 2006, was received by the Integrated Complaint Centre (ICC) on 26 <sup>th</sup> October 2006 regarding dust nuisance generated from the Project.	<p>Based on the information collected and the monitoring results, the complaint was considered not justifiable due to the following since no exceedance of the air quality monitoring results was recorded in October 2006.</p> <p>During site inspections in the month, dust mitigation measures have been implemented by the Contractor; and no observation was recorded during the site inspections.</p> <p>According to the information provided by the Contractor and the RSS, the Contractor has implemented additional mitigation measures, including increased water spraying on the public road to more than once a day and covered the stockpiling materials.</p>	Closed

<b>Log Ref.</b>	<b>Location</b>	<b>Received Date</b>	<b>Details of Complaint</b>	<b>Investigation/Mitigation Action</b>	<b>Status</b>
S73	Southern Section of the Project	3 Nov 06	The complaint, which was referred by RSS to ET on 3 <sup>rd</sup> November 2006, was raised by a resident living at Cheung Sha on 24 <sup>th</sup> October 2006 concerning noise generated from rock breaking in Southern Section of the Project.	<p>According to the EM&amp;A records, no exceedance of noise level and no non-compliance were recorded in the month.</p> <p>As advised by the Contractor and RSS, silent rock breaking equipment has been used and noise insulation materials have been used to minimize the noise impact generated from the rock breaking activity.</p> <p>Based on the provided information and the monitoring results, the complaints are considered not justifiable. The Contractor has implemented the mitigation measures to minimize the noise generation from construction activities and was still reminded to continuously implement their practice to prevent noise nuisance generation from the construction works.</p>	Closed
S74	Tung Chung Stream	24 Nov 06	Highways Department (HyD) of HKSAR received a complaint for Agriculture, Fisheries and Conservation (AFCD) regarding untreated site runoff discharged to Tung Chung Stream during the site visit on 21 <sup>st</sup> November 2006. The Resident Site Staff (RSS) subsequently referred the complaint to the Environmental Team (ET) Leader of the Project on 24 <sup>th</sup> November 2006.	The investigation revealed that, based on the meteorological data extracted from HKO, the highest rainfall recorded was between 13:45 and 15:45, with a total of 93mm in two hours. With the above rainfall intensities extracted from HKO, together with the Intensity-Duration-Frequency (IDF) for various return periods derived from Table 2 of the "Stormwater Drainage Manual", the return period should be less than 10 years. Therefore, the complaint was considered justifiable and the Contractor has implemented remedial measures and preventive measures.	Closed

Log Ref.	Location	Received Date	Details of Complaint	Investigation/Mitigation Action	Status
S75	West of the new Tung Chung Road Southern Section Discharge Point	21 Nov 06	Both Environmental Protection Department (EPD) and China Civil Engineering Construction Corporation and China Railway Wujia Joint Venture (the Contractor) received the same public complaint, regarding muddy water discharged to Chueng Sha on 21 <sup>st</sup> November 2006. The Contractor subsequently referred the complaint to the Environmental Team (ET) Leader of the Project on the same day.	The complainant considered that this stream was muddy and discharging muddy water into the sea. As stated in the above paragraph, the investigation revealed that the return period for the rainfall between 13:45 and 15:45 was 41 years. As the complaint was lodged at 14:58 on 21 <sup>st</sup> November 2006, it is reasonable to consider the rainfall recorded in the hour between 13:45 to 14:45 which was 57mm. According to "Stormwater Drainage Manual", the return period should be less than 10 years. Therefore, the complaint was considered justifiable and the Contractor has implemented remedial measures and preventive measures.	Closed
S76	Pui O Wan	27 Nov 06	China Civil Engineering Construction Corporation and China Railway Wujia Joint Venture (the Contractor) received the same public complaint, regarding muddy water discharged into Pui O Wan on 23 <sup>rd</sup> November 2006.  According to the complainant, muddy water was discharged into Pui O Wan from the new Tung Chung Road Southern Section Discharge Point (near proposed round about on South Lantau Road) in the morning of 23 <sup>rd</sup> November 2006. The complainant suspected that the muddy water was being pumped off site through failed filtration systems into the sea as there had been no recent rainfall on that day.	The investigation revealed that the complaint was considered not justifiable since (1) no muddy water was generated due to the construction activities in the vicinity of the discharged point; and (2) no surface runoff as no rainfall was recorded on 23 <sup>rd</sup> November 2006.	Closed

Log Ref.	Location	Received Date	Details of Complaint	Investigation/Mitigation Action	Status
S77	Sheung Ling Pei, Ha Ling Pei, Wong Ka Wai & Lung Tseng Tau Villages	18 Dec 06	<p>Highways Department (HyD) and the Resident Engineer received a complaint against Water Quality Supply (Muddy Water) at Sheung Ling Pei, Ha Ling Pei, Wong Ka Wai &amp; Lung Tseng Tau Villages via District Office (Islands) on 29<sup>th</sup> November 2006.</p> <p>The complainants claimed that subject villages were suffering from muddy water supplied from the water main on the past few days before 29<sup>th</sup> November 2006.</p>	<p>Upon receipt of the complaint, the Contractor inspected all streams (above AFCD entrance) in the Northern Section. Muddy water was observed at Stream 13 which was believed the source of muddy water. However, no water flow was found at the stream. The muddy water was considered probably due to the seepage of underground water mixed with excavated soil to Stream 13. Furthermore, an ad-hoc meeting between DO/WSD/AFCD/MOTT/CCJV/IEC/ET was held on 14 December 2006 to discuss this issue.</p> <p>The complaint was considered due to the construction activities of the Project. Emergency remedial works had been taken by the Contractor to rectify the situation and preventive measures had also been implemented.</p>	Closed
S80	Tung Chung Road near Lung Tseng Tau Village	3 Jan 07	<p>The complaint was lodged by a resident at Lung Tseng Tau Village regarding dust nuisance at Tung Chung Road near Lung Tseng Tau Village. According to the complainant, the dust was generated by vehicle movements (about 5 to 7 per day). The complainant noticed that there was only once per day for water spraying on the road. She suggested that the frequency of water spraying should be increased to 1 to 2 per hour. In addition, she requested to provide more water-spraying practice for the concerned area.</p>	<p>According to the Contractor and the RSS, the main dust emission in the vicinity of Lung Tseng Tau Village was due to the vehicle movements on Tung Chung Road.</p> <p>Base on the information collected and the monitoring results, the complaint was considered not justifiable since (1) no exceedance of the air quality monitoring results was recorded in December 2006; (2) dust mitigation measures have been implemented by the Contractor; and (3) no observation was recorded during the site inspections.</p> <p>In response to the complaint, the Contractor had stepped up the dust suppression control immediately. A water truck was mobilized to spray water at Tung Chung Road within particular in the vicinity of the complainant's house from once per day to at least 3 times per day.</p>	Closed

Log Ref.	Location	Received Date	Details of Complaint	Investigation/Mitigation Action	Status
S81	Lung Tseng Tau	20 Dec 06	<p>The Contractor, CCECC and CRWJ Joint Venture (CCJV) and Highways Department (HyD) of HKSAR received a complaint regarding dust control at Lung Tseng Tau from the Office of Islands District Councilor, Wong Fuk-kan on 6<sup>th</sup> December 2006.</p> <p>According to the complainant, he had received a number of complaints from residents in South Lantau regarding the dust nuisance when their vehicles passing through Tung Chung Road near Lung Tseng Tau. The residents said their vehicles were full of dust whenever they had passed through Tung Chung Road.</p>	<p>Base on the site inspection records and information collected from the RSS and the Contractor, the complaint was considered due to due to the vehicle movements on Tung Chung Road. In response to the complaint, the RSS has conducted site inspection in the afternoon on 18<sup>th</sup> December 2006. The Contractor had immediately mobilized labors to clear the mud trail on Tung Chung Road between ch.3700-4000 using sweepers. In order to maintain the condition of Tung Chung Road, the Contractor has mobilized more staff to clear the mud deposits on the whole Northern Section of Tung Chung Road on 23<sup>rd</sup> December 2006.</p> <p>The Contractor has provision wheel washing facilities at each site exit/entrance. In order to maintain Tung Chung Road condition, the Contractor has mobilized a water truck solely for wheel washing purpose at the site entrance near RW37 between ch.3700-4000 since 23<sup>rd</sup> December 2006. The location is the most busy site exit/entrance for soil removal as wheel washing facilities. Wheels of each vehicle shall be washed before leaving the site. The wastewater after wheel washing at each site exit/entrance shall be collected and treated before discharge at designated location. also mobilized water trucks</p>	Closed

Log Ref.	Location	Received Date	Details of Complaint	Investigation/Mitigation Action	Status
S82	The nullah near the Yat Tung Estate	15 Jan 07	<p>The complaint was lodged by the Legislative Councillor Hon. Albert W.Y. Chan regarding frequent discharge of muddy water from the Tung Chung Road improvement project on 15<sup>th</sup> December 2006. According to Mr. Chan's letter, the complainant was a resident living in Tung Chung.</p> <p>The DSD letter pointed out that muddy water was being frequently discharged to the nullah near the Yat Tung Estate, and confirmed that the site of Tung Chung Road improvement project was the source of such discharge.</p>	<p>After investigation, the discharge of muddy water was largely due to the deposited silts caused by previous heavy rainstorms in November.</p> <p>The contractor has responded promptly in deploying a number of actions to remedy the matter. These include de-silting operation at Wong Lung Hang nullah on 23<sup>rd</sup> December 2006 to remove the accumulated soil and silt materials washed down by the discharges, of which photographs are provided.</p> <p>In addition, several intermediate sedimentation ponds along the temporary drainage system south of Shek Mun Kap to improve de-silting capacity have been installed, and that the site condition will be closely monitored so that advice on any practical measures in improving the quality of water discharge to Wong Lung Hang nullah can be given.</p> <p>In addition, the Contractor is also undergoing continual inspections and monitoring on the conditions of the concerned discharge of the construction site, and is in close liaison with the ET to cap exceeding levels of future discharge.</p>	Closed

Log Ref.	Location	Received Date	Details of Complaint	Investigation/Mitigation Action	Status
S86	Slope opposite to the AFCD's Office at Tung Chung Road near mileage M2.5	8 Feb 07	The complaint was lodged by a resident in Lantau Island regarding the construction noise generated from the road works at the slope opposite to the AFCD's Office at Tung Chung Road near mileage M2.5.	<p>The site of concern is most likely at the RW6 of the Project. According to the Contractor, soil nailing works was conducted at RW6 and the first stage of soil nailing works at RW6 has been completed before 8<sup>th</sup> February 2007.</p> <p>According to the noise monitoring results at monitoring station NM5, Tung Chung Au Country Parks Management Centre, which is located near the AFCD's Office, there was no exceedance recorded from 2<sup>nd</sup> January to 14<sup>th</sup> February 2007.</p> <p>As advised by the Contractor, the following mitigation measures will be implemented as far as possible to reduce the noise nuisance to the nearby residents when soil nailing works carry out in the future:</p> <ul style="list-style-type: none"> <li>● To cover the soil nailing works area with tarpaulin;</li> <li>● To reduce the number of machines for soil nailing;</li> <li>● To orientate the machines for soil nailing works so that the major noise generating part will not directly face the Noise Sensitive Receiver; and</li> <li>● To scatter the plants so that the noise being generated will not be centralized in certain direction.</li> </ul>	Closed

Log Ref.	Location	Received Date	Details of Complaint	Investigation/Mitigation Action	Status
S90	Northern and Southern Section of Tung Chung Road	20 May 07	<p>The complaint was lodged by the Green Lantau Association at on 20 May 2007 regarding failed drainage for the Project on that day.</p>	<p>According to the Contractor, the main concern in the Northern Section is that a large amount of seepage from the permanent slope near the Stream 18 and Stream 21 was observed. The permanent hinterland u-channel was not able to collect most of the hinterland water which ultimately collected by the carrier pipe and increased the loading of the treatment facilities at Shek Mun Kap.</p> <p>As advised by the Contractor, the main problem in Southern Section was due to the fact that the silt is too fine to be settled within a short time, i.e. 3 minutes, as stated in the EIA Report. Due to the large catchments of the site, muddy water could not be completely settled or treated before discharged or overflowed. No bigger sedimentation tank can be constructed due to the site constraint to retain all surface water in heavy rainy days.</p> <p>The complaint was considered justifiable. However, it is beyond the Contractor's capability to completely avoid muddy water discharging or overflowing to sea due to the site conditions and constraints under increment weather conditions.</p>	<p>The complaint investigation report was commented</p>



Log Ref.	Location	Received Date	Details of Complaint	Investigation/Mitigation Action	Status
S91	Zone 4 (STR 14)	1 June 07	<p>The complaint was lodged by a resident in Butterfly Crest, Lantau Island regarding the construction noise generated from the Project on Sunday, which is likely to be 27<sup>th</sup> May 2007.</p>	<p>According to the Contractor, construction works were undertaken near STR 14 in the morning of 27<sup>th</sup> May 2007 and the Powered Mechanical Equipment (PME) used on that day included 2 excavators and 1 dump truck at STR 14. The concerned site was covered under the construction noise permit (CNP) no. GW-RS0281-07.</p> <p>As advised by the Contractor, the 2 excavators and 1 dump truck, which categorized separately as Group A and Group E of the abovementioned CNP, were utilized alternatively during the operation in order to comply with the conditions stipulated in the CNP.</p> <p>Base on the information collected, the complaint was considered not justifiable as the equipment used comply with the CNP conditions.</p>	Closed

Log Ref.	Location	Received Date	Details of Complaint	Investigation/Mitigation Action	Status
S93	Western Section of Pui O Bay	22 May 07	<p>The complaint was lodged by the Green Lantau Association at on 22 May 2007 regarding muddy water was observed at 50m west of the Tung Chung Road southern section around 11am on 22 May 2007.</p>	<p>As advised by the Contractor, the main problem in Southern Section was due to the fact that the silt is too fine to be settled within a short time, i.e. 3 minutes, as stated in the EIA Report. Due to the large catchments of the site, muddy water could not be completely settled or treated before discharged or overflowed. No bigger sedimentation tank can be constructed due to the site constraint to retain all surface water in heavy rainy days.</p> <p>In the site near Pui O Wan, the Contractor has exhausted their efforts including to pump the water from sedimentation tanks back to the stockpile area. Unfortunately, one of the pumps was out of order in the early days of that rainy period. However, the pump has been rectified on 22 May 2007.</p> <p>The complaint was considered justifiable. However, it is beyond the Contractor's capability to completely avoid muddy water discharging or overflowing to sea due to the site conditions and constraints under increment weather conditions.</p>	<p>The complaint investigation report was commented</p>

Log Ref.	Location	Received Date	Details of Complaint	Investigation/Mitigation Action	Status
S100	Stream water behind WSD's weir	27 July 07	<p>The complaint was lodged by a resident living at Lung Tseng Tau area during the meeting between RSS and the representatives from the villages at Lung Tseng Tau area on 17<sup>th</sup> July 2007 regarding turbid water supply from DO main to the village houses at Lung Tseng Tau area.</p>	<p>The RSS and the Contractor had a site investigation with the complainant at his household water supply, the WSD weir and a work area immediately upstream of the weir (STR02 near the Stream 12) on the same day.</p> <p>It was observed that the water directly from the household supply was found with low degree of turbidity when comparing it with portable water supply.</p> <p>According to the visual inspection of the RSS and the Contractor, the stream water behind the WSD's weir, which is the source of water supply to the villagers via a DO main, was found clear and there was no sign of contamination.</p> <p>Inspection of the work site at STR02 upstream of the weir indicated no activities affecting the upstream water quality.</p> <p>By reviewing the water quality monitoring data at Tung Chung Stream during early of July 2007, the turbidity and SS values are considered to be low and the data revealed that the Tung Chung Stream and the WSD weir were not contaminated during the above mentioned period.</p> <p>Nevertheless, In order to minimize the water quality impacts, the Contractor has implemented following mitigation measures:</p> <ul style="list-style-type: none"> <li>• To erect sand bag bund in the vicinity of STR02;</li> <li>• To shotcrete the soil surface near Stream 12.</li> </ul>	Closed

Log Ref.	Location	Received Date	Details of Complaint	Investigation/Mitigation Action	Status
S104	Tung Chung Road and Tung Chung Au near AFCD's Office	6 August 07	<p>The complaint was lodged by Mr. Ho on 6<sup>th</sup> August 2007 regarding a suspected case of silty runoff and muddy water generated from construction site flowing on public road. Turbid water was observed behind the weir near the AFCD's office at Tung Chung Au.</p>	<p>No non-compliance or environmental deficiency related to or in the vicinity of the concerned area was identified during these site audits.</p> <p>According to Hong Kong Observatory, Hong Kong was under the effect of the tropical storm over the central part of the South China Sea which brought heavy showers with 100.4 millimeters of total rainfall recorded on 6 August. The amber rainstorm warning was hoisted between 15:55pm to 17:30pm.</p> <p>The Contractor has confirmed there was no construction activity in the concerned area on 6<sup>th</sup> August 2007 due to heavy rainfall. According to the Contractor, muddy water was the silty runoff from nearby work sites due to the heavy rainfall on the day.</p> <p>The Contractor has implemented following mitigation measures:</p> <ul style="list-style-type: none"> <li>• To desilt temporary drainage channels and sedimentation tank.</li> <li>• To clear the silt and mud in the surface of haul road at RW06 ad RW07.</li> <li>• To cover exposed slope with tarpaulin at RW06 and RW07.</li> </ul> <p>According to the RSS and the Contractor, no further report of silt and muddy water runoff from concerned area was received after implementation of the aforesaid mitigation measures.</p>	Closed

Log Ref.	Location	Received Date	Details of Complaint	Investigation/Mitigation Action	Status
S113	Upper and Lower Cheung Sha Village	12 December 2007	The complaint was lodged by Mr. Liu on 12 December 2007 regarding dust nuisance at Upper and Lower Cheung Sha Village.	<p>According to the Contractor, the main dust emission in the vicinity of Cheung Sha Village was due to the road works and associated vehicle movements on Tung Chung Road.</p> <p>The Contractor has implemented following mitigation measures:</p> <ul style="list-style-type: none"> <li>• Cleared the silts on the haul road;</li> <li>• Applied watering on the road by water hose at San Shek Wan;</li> <li>• Increased the number of water browsers; and</li> <li>• Covered the exposed slope and stockpiles with tarpaulin sheets.</li> </ul> <p>By reviewing the air quality monitoring data, there was no exceedance of air quality monitoring results on 8<sup>th</sup> and 14<sup>th</sup> December 2007 and dust mitigation measures have been implemented by the Contractor.</p> <p>According to the RSS and the Contractor, no further complaint regarding dust nuisance from concerned area was received after implementation of the aforesaid mitigation measures.</p>	Closed

---

---

**APPENDIX M  
SUMMARY OF WARNING / DIRECTION  
ISSUED BY THE EPD AND  
PROSECUTION**

---

---

## Appendix M - Summary of Warnings / Direction Issued by the EPD and Prosecution

### Summary of Warnings / Direction Issued by the EPD

Date of Letter	Warnings/Direction
3 February 2005	The Contractor was requested to construct catch pits and perimeter channels in advance of site formation and earth works
17 May 2005	The Contractor was requested to immediately re-provide the on-site wastewater management systems to adequately cater the rainwater runoff and to submit the detail proposal for runoff management and treatment systems.
4 October 2005	The Contractor was requested to rectify the situation in order to comply with EP Conditions 2.4 & 2.5 regarding the provision of drainage systems, EP Condition 3.16 regarding site runoff mitigation measures and EP Condition 3.6 regarding no works of the Project shall be carried out outside the “limit of works area”.
15 December 2005	The Contractor was requested to rectify the situation of Zone D where fuel oil was found spilled onto ground of the works area in contravention to Section 7.5.2.1 of the Waste Management Plan (WMP). The Section stipulates provisions against spillage of fuels to prevent contamination of the construction site.
24 March 2006	The Contractor was requested to rectify the situation in order to comply with EP Condition 3.9 regarding the stipulated span of temporary bridges used during construction to cross the stream.
13 April 2006	The Contractor was requested to rectify the situation of Zone E where fuel oil was stored within the Country Park in contravention to condition 3.14 of the EP.
29 June 2006	The Contractor was requested to rectify the situation that site runoff will not be discharged into Tung Chung Stream in order to comply with EP Condition 2.4.
26 September 2006	The Contractor was requested to rectify the situation that excessive dust emission occurred. Watering programme shall maintain to ensure that all exposed road surfaces and dust sources are wet in order to comply with EP Condition 1.7.
4 October 2006	<ul style="list-style-type: none"> <li>-The Contractor was requested to rectify the situation that site runoff will not be discharged into Tung Chung Stream in order to comply with EP Condition 2.4.</li> <li>-The Contractor was requested to rectify the situation in order to comply with EP Condition 3.9 regarding the stipulated span of temporary bridges used during construction to cross the stream 28</li> <li>-.The Contractor was requested to rectify the situation in order to comply with EP Condition 3.9 regarding the stipulated span of temporary bridges used during construction to cross the stream 32.</li> <li>- The Contractor was requested to rectify the situation in order to comply with EP Condition 3.9 regarding the stipulated span of temporary bridges used during construction to cross the stream 33.</li> </ul>
13 February 2007	The Contractor was requested to rectify the situation that site runoff will not be discharged into Tung Chung Stream in order to comply with EP Condition 2.4.
19 February 2008	The Contractor was requested to take all necessary actions to rectify the situation that surface run-off from the construction site discharged into storm drain without treatment in order to comply with EP Condition 3.16.
14 April 2008	The Contractor was required to take all necessary actions to rectify the situation

Date of Letter	Warnings/Direction
	that a section of the site near Pak Kung Au was not provided with vehicle washing facilities including high pressure water jet at vehicular exit points so as not to contravene the statutory requirement.

#### Summary of Notification of Summons

Date of Summons	Details of the Summons	Status
25 January 2007	Construction works at a slope next to Stream no. 28 along Tung Chung Road, Cheung Sha, Lantau Island which contrary to EP Condition 3.9 concerning works at Stream 28 on 26 July 2006	Withdrawn by EPD
16 February 2007	Construction works near Stream no. 8 along Tung Chung Road, Cheung Sha, Lantau Island which contrary to EP Condition 2.4 by discharging runoff during construction into Tung Chung Stream on 16 August 2006	The Contractor was fined \$7500 on 4 June 2007.
17 May 2007	Construction works near Stream no. 8 along Tung Chung Road, Cheung Sha, Lantau Island which contrary to EP Condition 2.4 by discharging runoff during construction into Tung Chung Stream on 21 November 2006	The Contractor was fined \$7500 on 4 June 2007.

#### Summary of Notification of Successful Prosecution

Date of Successful Prosecution	Details of the Successful Prosecution	Status
4 June 2007	Construction works near Stream no. 8 along Tung Chung Road, Cheung Sha, Lantau Island which contrary to EP Condition 2.4 by discharging runoff during construction into Tung Chung Stream on 16 August 2006	The Contractor was fined \$7500 on 4 June 2007
4 June 2007	Construction works near Stream no. 8 along Tung Chung Road, Cheung Sha, Lantau Island which contrary to EP Condition 2.4 by discharging runoff during construction into Tung Chung Stream on 21 November 2006	The Contractor was fined \$7500 on 4 June 2007



---








---

**APPENDIX N**  
**CONSTRUCTION PROGRAMME**

---

---








Activity ID	Description	Orig Dur	% Comp	Early Start	Early Finish	2008												2008		
						2008			AUG				SEP			OCT			2008	
						MAY	JUN	JUL	04	11	18	25	01	08	15	22	29	06	13	20
Commencement & Key Dates																				
Revised Key Dates																				
ZAKD000	Commencement of Contract	0	100	28JUN04 A																
ZAKD001	Complete Works in Section 1	0	0		30APR09															
ZAKD002	Complete Works in section 2	0	0		31DEC08															
ZAKD003	Complete Works in Section 1A	0	0		31AUG11															
ZAKD004	Complete Works in Section 2A	0	0		31AUG11															
ZAKD005	Complete Works in Section 3	0	0		01AUG11															
ZAKD006	Complete Works in Section 3A	0	0		30AUG12															
ZAKD007	Complete Works in Undefined Section	0	0		21AUG09															
ZAKD008	Complete Establish'nt Works in Undefined Section	0	0		31AUG11															
Completion Dates																				
ZAKD002	Extended Completion Date of Section 1 (Claim 62)	0	100		09MAR07 A															
ZAKD003	Extended Completion Date of Section 1A(Claim 62)	0	0		08MAR09 *															
ZAKD005	Extended Completion Date of Section 2 (Claim 62)	0	100		06JAN07 A															
ZAKD006	Extended Completion Date of Section 2A(Claim 62)	0	0		05JAN09 *															
ZAKD008	Extended Completion Date of Section 3 (Claim 62)	0	100		09JUN07 A															
ZAKD010	Extended Completion Date of Section 3A(Claim 62)	0	0		08JUN09 *															
General																				
Monthly Monitoring Submission																				
0470	Waste Management Plan	387w1d	58	04NOV04 A	25APR11															
0480	Environment Monitoring and Audit	387w1d	58	04NOV04 A	25APR11															

Start date	28JUN04		Early bar
Finish date	30AUG12		Progress bar
Data date	01AUG08		Critical bar
Number/Version	Revision 15		Summary bar
Page number	1A		Summary point
Project name	RV1501		Start milestone point
			Finish milestone point

**Contract No. HY/2003/19**  
**Improvement to Tung Chung Road**  
**3M Rolling Programme 01.08.08 to 31.10.08**

Date	Revision	Checked	Approved
01AUG08	3M update		

Activity ID	Description	Orig Dur	% Comp	Early Start	Early Finish	2008														
						2008			AUG				SEP			OCT			2008	
						MAY	JUN	JUL	04	11	18	25	01	08	15	22	29	06	13	20
Section 1																				
Zone A (CH. 1000 - 1565)																				
Drainage Works																				
S1-1500	Footpath and verge (Additional Work)	10w4d	61	16JUN08 A	01SEP08	Footpath and verge (Additional Work)														
Roadworks																				
S1-1530	Street Furniture (Additional Works)	8w2d	52	01JUL08 A	30SEP08	Street Furniture (Additional Works)														
Landscaping																				
S1-1545	Landscape Earth Bund Ch.920-1020	3w4d	0	01APR09 *	30APR09															
Zone B (CH. 1565 - 2130)																				
Slope Works																				
S1-2080	Recompact fill slope remedial works ch1755-1945	8w2d	0	01AUG08 *	30SEP08	Recompact fill slope remedial work														
S1-2084	Outlet of Culvert @ Ch2021 remedial works	6w2d	0	16AUG08 *	30SEP08	Outlet of Culvert @ Ch2021 remedial work														
Roadworks																				
S1-2337	Additional drainage Pipe Desilting Works	19w1d	0	14AUG08	31DEC08 *	Additional drainage Pipe Desilting Works														
S1-2338	Footpath and Verge (Remedial Works)	1w	0	01NOV08 *	07NOV08	Footpath and Verge (Remedial Works)														
S1-2370	Additional street furnitures	3w2d	0	08NOV08 *	01DEC08	Additional street furnitures														
Zone C (CH. 2130 - 2725)																				
Slope Works																				
S1-3194	Recompact fill slope (VO50 & 83) remedial work	8w2d	0	01AUG08 *	30SEP08	Recompact fill slope (VO50 & 83) remedial work														
Retaining Wall RW06																				
S1-2350	Utilities (Remedial Works)	19w5d	0	01AUG08 *	22DEC08	Utilities (Remedial Works)														
S1-3890	RC structure Bay 8	4w1d	0	16OCT08 *	13NOV08	RC structure Bay 8														
S1-3900	Backfilling	2w1d	0	14NOV08	28NOV08	Backfilling														
S1-3910	Slope drainage	4w1d	0	29NOV08	30DEC08	Slope drainage														

Start date	28JUN04		Early bar
Finish date	30AUG12		Progress bar
Data date	01AUG08		Critical bar
Number/Version	Revision 15		Summary bar
Page number	2A		Summary point
Project name	RV1501		Start milestone point
			Finish milestone point
c Primavera Systems, Inc.			

**Contract No. HY/2003/19**  
**Improvement to Tung Chung Road**  
**3M Rolling Programme 01.08.08 to 31.10.08**

Date	Revision	Checked	Approved
01AUG08	3M update		

Activity ID	Description	Orig Dur	% Comp	Early Start	Early Finish	2008												2008					
						2008			AUG				SEP			OCT			2008				
						MAY	JUN	JUL	04	11	18	25	01	08	15	22	29	06	13	20	27	NOV	DEC
<b>Roadworks</b>																							
S1-3631	Waterworks remedial works	1w	0	23DEC08 *	31DEC08																		
S1-3632	HyD remedial works (kerb)	2w	0	02JAN09 *	15JAN09																		
S1-3633	Additional U channel	1w3d	0	02JAN09 *	12JAN09																		
S1-3634	Street furniture remedial works	2w4d	0	24JAN09 *	14FEB09																		
S1-3635	Footpath and Verge remedial works	1w1d	0	16JAN09 *	23JAN09																		
<b>Zone D (CH. 2725 - 3100)</b>																							
<b>Slope Works</b>																							
S1-4069	Utility remedial works CH2760-3060 downhill	8w2d	0	01SEP08 *	31OCT08																Utility rem		
S1-4080	Top channel (CH. 2940 - 3060) remedial works	4w2d	0	01NOV08	01DEC08																Top		
S1-4081	Concrete verge	2w	0	02DEC08 *	15DEC08																Co		
<b>Retaining Wall RW07</b>																							
S1-4241	Utility remedial works	27w4d	0	01AUG08 *	21FEB09																		
S1-4260	Backfilling (Remaining)	20w5d	0	01AUG08 *	31DEC08																		
S1-4280		1d	0	01AUG08	01AUG08																		
S1-4270	Slope Drainage	20w5d	0	01AUG08 *	31DEC08																		
<b>Roadworks</b>																							
<b>Road work</b>																							
S1-4416	Utility remedial works	27w4d	0	01AUG08 *	21FEB09																		
S1-4417	Waterworks remedial works	2w1d	0	23FEB09 *	09MAR09																		
S1-4418	HyD remedial works (kerb)	2w1d	0	10MAR09 *	24MAR09																		
S1-4419	Additional U channel	1w5d	0	10MAR09 *	21MAR09																		
S1-4421	Footpath remedial works	1w	0	25MAR09 *	31MAR09																		
S1-4430	Street Furniture remedial works	1w3d	0	01APR09 *	15APR09																		
<b>Zone E (CH. 3100 - 4010)</b>																							
Start date	28JUN04															Date	Revision	Checked	Approved				
Finish date	30AUG12															01AUG08	3M update						
Data date	01AUG08																						
Number/Version	Revision 15																						
Page number	3A																						
Project name	RV1501																						
c Primavera Systems, Inc.																							

**Contract No. HY/2003/19  
Improvement to Tung Chung Road  
3M Rolling Programme 01.08.08 to 31.10.08**

Activity ID	Description	Orig Dur	% Comp	Early Start	Early Finish	2008																
						2008			AUG				SEP				OCT				2008	
						MAY	JUN	JUL	04	11	18	25	01	08	15	22	29	06	13	20	27	NOV
<b>Slope Works</b>																						
S1-5151	9SE-D/F9 (Closure of existing TCR)	6w2d	0	16SEP08 *	31OCT08	9SE-D/F9																
S1-5152	TCR/UF/C/10 (Closure of existing TCR)	4w1d	0	01AUG08 *	30AUG08	TCR/UF/C/10 (Closure of existing TCR)																
<b>Retaining Wall RW10</b>																						
S1-5390	Backfilling	12w3d	0	01AUG08 *	31OCT08	Backfilling																
<b>Retaining Wall RW11</b>																						
S1-5450	Backfilling	8w	0	01DEC08 *	31JAN09																	
S1-5463	U channel	4w	0	02FEB09 *	28FEB09																	
<b>Retaining Wall RW12</b>																						
S1-5500	Backfilling & Reinstatement of Carriageway	6w1d	0	01AUG08 *	16SEP08	Backfilling & Reinstatement of Carriageway																
<b>Roadworks</b>																						
Road work																						
S1-5843	HyD remedial works (kerb)	3w5d	0	02JAN09 *	31JAN09																	
S1-5844	Waterworks remedial works	3w2d	0	02JAN09 *	24JAN09																	
S1-5846	Additional drainage works	28w4d	0	01AUG08 *	28FEB09																	
S1-5847	Footpath and verge additional works	4w2d	0	02MAR09 *	31MAR09																	
S1-5836	Utilities remedial works	18w5d	0	16AUG08 *	31DEC08																	
S1-5838	Additional street furniture	3w4d	0	01APR09 *	30APR09																	
<b>Zone F (CH. 4010 - 4686)</b>																						
<b>Slope Works</b>																						
S1-6111	9SE-D/C20 (Closure of existing TCR)	4w1d	0	01AUG08 *	30AUG08	9SE-D/C20 (Closure of existing TCR)																
S1-6113	TCR/UF/C/12 (Closure of existing TCR)	4w1d	0	01AUG08 *	30AUG08	TCR/UF/C/12 (Closure of existing TCR)																
S1-6114	9SE-D/C35 (Closure of existing TCR)	6w4d	0	02JAN09	20FEB09																	
<b>Retaining Wall RW14</b>																						








Start date	28JUN04		Early bar
Finish date	30AUG12		Progress bar
Data date	01AUG08		Critical bar
Number/Version	Revision 15		Summary bar
Page number	4A		Summary point
Project name	RV1501		Start milestone point
			Finish milestone point

**Contract No. HY/2003/19**  
**Improvement to Tung Chung Road**  
**3M Rolling Programme 01.08.08 to 31.10.08**

Date	Revision	Checked	Approved
01AUG08	3M update		










Activity ID	Description	Orig Dur	% Comp	Early Start	Early Finish	2008																	
						2008			AUG				SEP				OCT			2008			
						MAY	JUN	JUL	04	11	18	25	01	08	15	22	29	06	13	20	27	NOV	DEC
S1-6922	Testing & commisioning	4w1d	0	01SEP08 *	30SEP08																		
S1-6923	Fencing & ground level works	12w3d	0	01SEP08 *	29NOV08																		
Transformer Room at CH. 4660																							
S1-6903	Fencing & ground level works	16w4d	0	01AUG08 *	29NOV08																		
Section 1A																							
Maintenance Access Track																							
S1-1570	Landscape softworks Ch.0-260	53w3d	0	01AUG08 *	31AUG09																		
Zone A (CH. 1000 - 1565)																							
S1-1550	Landscape softworks	53w3d	0	01AUG08 *	31AUG09																		
Zone B (CH. 1565 - 2130)																							
S1-2660	Landscape Softworks	53w3d	0	01AUG08 *	31AUG09																		
Zone C (CH. 2130 - 2725)																							
Landscaping																							
S1-3850	Landscape softworks	20w3d	0	01APR09 *	31AUG09																		
Zone D (CH. 2725 - 3100)																							
S1-4600	Landscape Softworks	19w	0	16APR09 *	31AUG09																		
Zone E (CH. 3100 - 4010)																							
S1-5915	Landscape Softworks	20w3d	0	01APR09 *	31AUG09																		
Zone F (CH. 4010 - 4686)																							
Landscaping																							

Start date	28JUN04		Early bar	<b>Contract No. HY/2003/19</b> <b>Improvement to Tung Chung Road</b> <b>3M Rolling Programme 01.08.08 to 31.10.08</b>	Date	Revision	Checked	Approved
Finish date	30AUG12		Progress bar		01AUG08	3M update		
Data date	01AUG08		Critical bar					
Number/Version	Revision 15		Summary bar					
Page number	6A		Summary point					
Project name	RV1501		Start milestone point					
			Finish milestone point					

c Primavera Systems, Inc.

Activity ID	Description	Orig Dur	% Comp	Early Start	Early Finish	2008														
						2008			AUG				SEP			OCT			2008	
						MAY	JUN	JUL	04	11	18	25	01	08	15	22	29	06	13	20
S1-6910	Landscape Softworks	20w3d	0	01APR09 *	31AUG09															
<b>Establishment works</b>																				
S1-6920	Establishment Works for Section 1A(claim no.084)	118w2d	0	01SEP09 *	31AUG11															
<b>Section 2</b>																				
<b>Zone 1 (CH. 7013 - Outfall)</b>																				
<b>Roadworks</b>																				
S2-1265	Additional toe wall & F/P near YWCA(Claim no141)	27w2d	77	01MAR08 A	16SEP08															
S2-1266	Additional works on footpath and verge	8w2d	0	01AUG08 *	30SEP08															
S2-1280	CCTV and related slope	8w2d	0	01AUG08 *	30SEP08															
S2-1290	Street Furnitures & road marking (additional)	8w2d	0	02OCT08 *	29NOV08															
<b>Zone 2 (CH. 6595 - 7013)</b>																				
<b>Roadworks</b>																				
Road work																				
S2-2395	Additional works on footpath & Verge	10w4d	22	16JUL08 A	30SEP08															
S2-2400	Street Furnitures & Road Marking (Additional)	8w2d	0	02OCT08 *	29NOV08															
<b>Zone 3 ( CH. 6240 - 6595)</b>																				
<b>Roadworks</b>																				
Road work																				
S2-3736	Additional works on footpath & verge	8w2d	0	01AUG08 *	30SEP08															
S2-3740	Street furnitures & Road Marking (Additional)	8w2d	0	02OCT08 *	29NOV08															
<b>Zone 4 (CH. 5625 - 6240)</b>																				
<b>Roadworks</b>																				
Road work																				
S2-4904	Reinstatement around bridge structures	14w5d	16	16JUL08 A	31OCT08															
S2-4905	Additional works on footpath & verge	4w1d	0	01NOV08	29NOV08															








Start date	28JUN04		Early bar
Finish date	30AUG12		Progress bar
Data date	01AUG08		Critical bar
Number/Version	Revision 15		Summary bar
Page number	7A		Summary point
Project name	RV1501		Start milestone point
			Finish milestone point
c Primavera Systems, Inc.			

**Contract No. HY/2003/19**  
**Improvement to Tung Chung Road**  
**3M Rolling Programme 01.08.08 to 31.10.08**

Date	Revision	Checked	Approved
01AUG08	3M update		



Activity ID	Description	Orig Dur	% Comp	Early Start	Early Finish	2008																		
						2008			AUG				SEP			OCT			2008					
						MAY	JUN	JUL	04	11	18	25	01	08	15	22	29	06	13	20	27	NOV	DEC	
S2-4910	Street Furnitures & Road Marking (Additional)	4w	0	02DEC08 *	31DEC08																			
<b>Rockfall Protection System at CH.6100 (RPS7)</b>																								
S2-4930	Delivery of material	10w1d	0	01AUG08 *	30SEP08																			
S2-4940	Erect fence	6w3d	0	02OCT08	17NOV08																			
S2-4945	Maintenance stairway (Remedial Work)	6w	0	18NOV08	31DEC08																			
<b>Zone 5 (CH. 4922 - 5625)</b>																								
<b>Bridge STR09A</b>																								
S2-5261	Remove dangerous boulder (SI-36) remaining works	6w1d	0	03NOV08 *	15DEC08																			
<b>Water Works</b>																								
S2-5705	Construct Break Pressure Tank (E&M/finsh)	18w4d	0	16AUG08 *	30DEC08																			
<b>Roadworks</b>																								
Road work																								
S2-5854	Reinstate't around bridge structures	14w5d	16	16JUL08 A	31OCT08																			
S2-5855	Additional works on footpath & verge	4w1d	0	01NOV08	29NOV08																			
S2-5860	Street Furnitures and Road Marking (Additional)	4w	0	02DEC08	31DEC08																			
<b>Zone 6 (CH. 4686 - 4922)</b>																								
<b>Roadworks</b>																								
Road work																								
S2-6709	Reinstaement around structures	16w4d	39	16JUN08 A	15OCT08																			
S2-6710	Additional works on footpath & verge	6w3d	0	16OCT08 *	29NOV08																			
S2-6720	Street Furnitures & Raod Marking (Additional)	4w1d	0	01DEC08 *	31DEC08																			
<b>Section 2A</b>																								
<b>Zone 1-6</b>																								
<b>Landscaping</b>																								
S2-6730	Landscape Softworks	49w3d	34	01APR08 A	31AUG09																			

Start date	28JUN04		Early bar
Finish date	30AUG12		Progress bar
Data date	01AUG08		Critical bar
Number/Version	Revision 15		Summary bar
Page number	8A		Summary point
Project name	RV1501		Start milestone point
			Finish milestone point
c Primavera Systems, Inc.			

**Contract No. HY/2003/19**  
**Improvement to Tung Chung Road**  
**3M Rolling Programme 01.08.08 to 31.10.08**

Date	Revision	Checked	Approved
01AUG08	3M update		

Activity ID	Description	Orig Dur	% Comp	Early Start	Early Finish	2008												2008		
						2008			AUG				SEP			OCT			2008	
						MAY	JUN	JUL	04	11	18	25	01	08	15	22	29	06	13	20
S2-6735	Haul road reinstatement	29w	58	01APR08 A	31MAR09															
<b>Establishment works</b>																				
S2-6740	Establishment Works for Section 2A(claim no.084)	118w2d	0	01SEP09 *	31AUG11															
<b>Section 3</b>																				
<b>Feature No. TCR/UF/C/15</b>																				
S3-3000	Cut and Trim Slope Surface	1w1d	0	02JAN09 *	12JAN09															
S3-3010	300mm u channel at crest	1w4d	0	14JAN09	31JAN09															
S3-3020	Slope Surface Protection	2w2d	0	31JAN09	17FEB09															
<b>Feature No. 13NE-B/C65</b>																				
S3-3030	Install soil nail (199 nos.)	4w4d	0	31JAN09	05MAR09															
S3-3040	Slope surface protection	2w2d	0	05MAR09	21MAR09															
<b>Feature No. 13NE-B/C64</b>																				
S3-3050	Install soil nail (127 nos.)	3w2d	0	05MAR09	28MAR09															
S3-3060	Pull out tests (4 nos.)	1w2d	0	28MAR09	08APR09															
S3-3065	300mm u-channel at crest & toe	3w2d	0	08APR09	07MAY09															
S3-3070	Slope surface protection	2w2d	0	07MAY09	23MAY09															
<b>Feature No. 13NE-B/C63</b>																				
S3-3080	Install soil nail (111 nos.)	3w1d	0	07MAY09	30MAY09															
S3-3090	Pull out test (5 nos.)	1w2d	0	30MAY09	09JUN09															
S3-3100	300mm stepped & u-channel	3w2d	0	09JUN09	03JUL09															
S3-3110	Slope surface protection	2w2d	0	03JUL09	20JUL09															
<b>Feature No. 13NE-B/C62</b>																				
S3-3120	Install soil nail (144 nos.)	3w4d	0	03JUL09	29JUL09															








Start date	28JUN04
Finish date	30AUG12
Data date	01AUG08
Number/Version	Revision 15
Page number	9A
Project name	RV1501
c Primavera Systems, Inc.	

- Early bar
- Progress bar
- Critical bar
- Summary bar
- Summary point
- Start milestone point
- Finish milestone point

**Contract No. HY/2003/19**  
**Improvement to Tung Chung Road**  
**3M Rolling Programme 01.08.08 to 31.10.08**

Date	Revision	Checked	Approved
01AUG08	3M update		








Activity ID	Description	Orig Dur	% Comp	Early Start	Early Finish	2008															
						2008			AUG				SEP				OCT			2008	
						MAY	JUN	JUL	04	11	18	25	01	08	15	22	29	06	13	20	27
S3-3130	Pull out tests (5 nos.)	1w2d	0	29JUL09	07AUG09																
S3-3140	300mm stepped & u channel	3w2d	0	07AUG09	31AUG09																
S3-3150	Slope surface protection	2w2d	0	31AUG09	16SEP09																
<b>Feature No. 13NE-B/F64</b>																					
S3-3160	Recompact slope	2w2d	0	31AUG09	16SEP09																
S3-3170	Reconstruct 750mm stepped channel & stairway	3w2d	0	16SEP09	10OCT09																
S3-3180	300mm u channel	2w2d	0	10OCT09	28OCT09																
<b>Feature No. 13NE-B/C80</b>																					
S3-3190	Install soil nail (42 nos.)	2w	0	10OCT09	24OCT09																
S3-3200	Pull out test (1 nos.)	1w2d	0	24OCT09	04NOV09																
S3-3210	300mm u channel	2w2d	0	04NOV09	20NOV09																
S3-3220	Slope surface protection	2w2d	0	20NOV09	07DEC09																
<b>Feature No. 13NE-B/C233</b>																					
S3-3230	Install soil nail (44 nos.)	2w	0	20NOV09	04DEC09																
S3-3240	Pull out tests (2 nos.)	1w2d	0	04DEC09	14DEC09																
S3-3250	Reconstruct 300mm u channel	2w2d	0	14DEC09	02JAN10																
S3-3260	Slope surface protection	3w2d	0	02JAN10	26JAN10																
<b>Feature No. 13NE-B/CR72</b>																					
S3-3270	Install soil nail (113 nos.)	3w2d	0	02JAN10	26JAN10																
S3-3280	Pull out tests (3 nos.)	1w2d	0	26JAN10	04FEB10																
S3-3290	300mm u channel	2w2d	0	04FEB10	23FEB10																
S3-3300	Slope surface protection	3w2d	0	23FEB10	18MAR10																
<b>Feature No. 13NE-B/FR68</b>																					

Start date	28JUN04	 Early bar
Finish date	30AUG12	 Progress bar
Data date	01AUG08	 Critical bar
Number/Version	Revision 15	 Summary bar
Page number	10A	 Summary point
Project name	RV1501	 Start milestone point
		 Finish milestone point
c Primavera Systems, Inc.		

**Contract No. HY/2003/19**  
**Improvement to Tung Chung Road**  
**3M Rolling Programme 01.08.08 to 31.10.08**

Date	Revision	Checked	Approved
01AUG08	3M update		

Activity ID	Description	Orig Dur	% Comp	Early Start	Early Finish	2008																
						2008			AUG				SEP				OCT			2008		
						MAY	JUN	JUL	04	11	18	25	01	08	15	22	29	06	13	20	27	NOV
S3-3310	Remove existing rubble wall	1w4d	0	23FEB10	06MAR10																	
S3-3320	Recompact slope	2w2d	0	06MAR10	23MAR10																	
S3-3330	300mm u channel at toe	2w2d	0	23MAR10	12APR10																	
<b>Feature No. 13NE-B/C115</b>																						
S3-3340	Install soil nail (136 nos.)	3w2d	0	02JAN09	24JAN09																	
S3-3350	Pull out tests (5 nos.)	1w2d	0	29JAN09	06FEB09																	
S3-3360	300mm u channel at toe	2w2d	0	07FEB09	23FEB09																	
S3-3370	Slope surface protection	2w2d	0	24FEB09	11MAR09																	
<b>Feature No. 13NE-B/C116</b>																						
S3-3380	Install soil nail (75 nos.)	2w2d	0	02APR09	22APR09																	
S3-3390	Pull out tests (4 nos.)	1w2d	0	23APR09	04MAY09																	
S3-3400	300mm u channel at toe	2w2d	0	05MAY09	20MAY09																	
S3-3410	Slope surface protection	3w2d	0	21MAY09	13JUN09																	
<b>Feature No. TCR/JF/F/22</b>																						
S3-3420	Recompact slope	3w2d	0	21MAY09	13JUN09																	
S3-3430	300mm stepped & u channel at crest & toe	3w2d	0	15JUN09	08JUL09																	
<b>Feature No. 13NE-B/FR90</b>																						
S3-3440	Recompact slope	3w2d	0	09JUL09	31JUL09																	
S3-3450	300mm stepped & u channel at crest & toe	3w2d	0	01AUG09	24AUG09																	
<b>Feature No. 13NE-B/C117</b>																						
S3-3460	Install soil nail (33 nos.)	1w4d	0	25AUG09	04SEP09																	
S3-3470	Pull out tests (2 nos.)	1w2d	0	05SEP09	14SEP09																	
S3-3480	300mm u channel	2w2d	0	15SEP09	30SEP09																	








Start date	28JUN04	 Early bar
Finish date	30AUG12	 Progress bar
Data date	01AUG08	 Critical bar
Number/Version	Revision 15	 Summary bar
Page number	11A	 Summary point
Project name	RV1501	 Start milestone point
		 Finish milestone point
c Primavera Systems, Inc.		

**Contract No. HY/2003/19**  
**Improvement to Tung Chung Road**  
**3M Rolling Programme 01.08.08 to 31.10.08**

Date	Revision	Checked	Approved
01AUG08	3M update		










Activity ID	Description	Orig Dur	% Comp	Early Start	Early Finish	2008												2008			
						2008			AUG				SEP				OCT			2008	
						MAY	JUN	JUL	04	11	18	25	01	08	15	22	29	06	13	20	27
S3-3670	Install soil nail (16 nos.)	1w4d	0	24FEB09	06MAR09																
S3-3680	Pull out test (1 nos.)	1w2d	0	07MAR09	16MAR09																
S3-3690	300mm u channel at toe	2w2d	0	17MAR09	01APR09																
S3-3700	Slope surface protection	3w2d	0	02APR09	29APR09																
<b>Utilities</b>																					
S3-3800	Utilities installation	90w	0	22JAN10	31JUL11																
<b>Section 3A</b>																					
<b>Landscaping</b>																					
S3-3805	Landscape softworks	20w4d	0	01APR10 *	31AUG10																
<b>Establishment works</b>																					
S3-3810	Establishment Works for Section 3A(claim no.084)	119w5d	0	01SEP10 *	30AUG12																
<b>Undefined Section of Works</b>																					
<b>Zone B (CH. 1565 - 2130)</b>																					
<b>Straining &amp; Deflection Structure SD 2-5</b>																					
S1-2402	Claim 91	30w3d	67	01APR08 A	30SEP08														Claim 91		
S1-2420	Superstructure	12w3d	0	02OCT08	31DEC08																
<b>Straining &amp; Deflection Structure SD 3-6</b>																					
S1-2450	Claim 91	30w3d	67	01APR08 A	30SEP08														Claim 91		
S1-2460	Superstructure	4w1d	0	02OCT08	31OCT08														Superstruc		
<b>Straining &amp; Deflection Structure SD 4-7</b>																					
S1-2492	Claim 91	30w3d	67	01APR08 A	30SEP08														Claim 91		
S1-2500	Superstructure	12w3d	0	02OCT08	31DEC08																
<b>Flexible Debris Barrier at CH. 1700 (OFB1)</b>																					

Start date	28JUN04		Early bar
Finish date	30AUG12		Progress bar
Data date	01AUG08		Critical bar
Number/Version	Revision 15		Summary bar
Page number	13A		Summary point
Project name	RV1501		Start milestone point
			Finish milestone point

**Contract No. HY/2003/19**  
**Improvement to Tung Chung Road**  
**3M Rolling Programme 01.08.08 to 31.10.08**

Date	Revision	Checked	Approved
01AUG08	3M update		








Activity ID	Description	Orig Dur	% Comp	Early Start	Early Finish	2008														
						2008			AUG				SEP			OCT			2008	
						MAY	JUN	JUL	04	11	18	25	01	08	15	22	29	06	13	20
S1-2580	Boulder mitigation stream 5-6	4w1d	0	02FEB09 *	02MAR09															
<b>Flexible Debris Barrier at CH. 1800 (OFB2)</b>																				
S1-2631	Remaining Post (affected by SD4-7)	1w2d	0	02JAN09	10JAN09															
S1-2641	Remaining Barrier	1w2d	0	12JAN09	20JAN09															
S1-2651	Maintenance Stairway (Remaining)	1w4d	0	21JAN09	04FEB09															
<b>Zone C (CH. 2130 - 2725)</b>																				
<b>Permanent Soil Nails</b>																				
S1-3785	Remaining Soil nails at RW006	10w	0	01SEP08	12NOV08														Remain	
<b>Straining &amp; Deflection Structure SD 5-11</b>																				
S1-3708	Claim 91	30w3d	67	01APR08 A	30SEP08														Claim 91	
S1-3710	Superstructure	8w2d	0	02OCT08	29NOV08														Super	
<b>Flexible Debris Barrier at CH. 2700 (OFB3)</b>																				
S1-3780	Maintenance Stairway (Remedial Work)	4w1d	0	01AUG08	30AUG08														Maintenance Stairway (Remedial Work)	
<b>Zone D (CH. 2725 - 3100)</b>																				
<b>Straining &amp; Deflection Structure SD 6-12</b>																				
S1-4462	Claim 91	30w3d	67	01APR08 A	30SEP08														Claim 91	
S1-4470	Superstructure	8w2d	0	02OCT08	29NOV08														Super	
<b>Straining &amp; Deflection Structure SD 7-13</b>																				
S1-4502	Claim 91	30w3d	67	01APR08 A	30SEP08														Claim 91	
S1-4510	Superstructure (Outstanding Works)	8w2d	0	02OCT08	29NOV08														Super	
S1-4520	Boulder mitigation	16w	0	01DEC08	28MAR09															
<b>Flexible Debris Barrier at CH. 2800 (OFB4)</b>																				

Start date	28JUN04	 Early bar
Finish date	30AUG12	 Progress bar
Data date	01AUG08	 Critical bar
Number/Version	Revision 15	 Summary bar
Page number	14A	 Summary point
Project name	RV1501	 Start milestone point
		 Finish milestone point

**Contract No. HY/2003/19**  
**Improvement to Tung Chung Road**  
**3M Rolling Programme 01.08.08 to 31.10.08**

Date	Revision	Checked	Approved
01AUG08	3M update		

Activity ID	Description	Orig Dur	% Comp	Early Start	Early Finish	2008																
						2008			AUG				SEP				OCT			2008		
						MAY	JUN	JUL	04	11	18	25	01	08	15	22	29	06	13	20	27	NOV
S1-4580	Barrier Installation (outstanding part)	4w1d	0	01AUG08	30AUG08																	
S1-4590	Maintenance Stairway (Remedial Works)	4w1d	0	01SEP08	30SEP08																	
<b>Zone E (CH. 3100 - 4010)</b>																						
<b>Straining &amp; Deflection Structure SD 10-19</b>																						
S1-5902	Claim 91	30w3d	67	01APR08 A	30SEP08																	
S1-5905	Superstructure	8w2d	0	02OCT08	29NOV08																	
<b>Zone F (CH. 4010 - 4686)</b>																						
<b>Permanent Soil Nails</b>																						
S1-6625	Soil Nail at RW038	15w3d	0	04MAY09	21AUG09																	
<b>Flexible Debris Barrier at CH. 4600 (OFB5)</b>																						
S1-6870	Erect fence (outstanding part)	8w3d	51	02JUL08 A	01SEP08																	
S1-6880	Maintenance access path (Remedial Works)	3w5d	0	02SEP08	30SEP08																	
<b>Rockfall Protection System at CH. 4400 (RPS2)</b>																						
S1-6886	Erect Fence	4w	0	01SEP08	30SEP08																	
S1-6887	Maintenance Stairway (Remedial Works)	4w	0	02OCT08	31OCT08																	
<b>Zone 5 (CH. 4922 - 5625)</b>																						
<b>Straining &amp; Deflection Structure SD 12-30</b>																						
S2-5870	Claim 91	25w1d	67	01APR08 A	30SEP08																	
S2-5875	Soil Nail	4w1d	0	02OCT08	31OCT08																	
S2-5880	Superstructure	8w2d	0	01NOV08	31DEC08																	
<b>Rockfall Protection System at CH. 5320 (RPS3)</b>																						
S2-5900	Delivery of material (lost after heavy rain)	12w5d	21	16JUL08 A	30SEP08																	
S2-5910	Erect fence	8w2d	0	02OCT08	29NOV08																	
S2-5915	Maintenance stairway (Remedial Works)	4w1d	0	01DEC08	31DEC08																	

Start date	28JUN04		Early bar
Finish date	30AUG12		Progress bar
Data date	01AUG08		Critical bar
Number/Version	Revision 15		Summary bar
Page number	15A		Summary point
Project name	RV1501		Start milestone point
			Finish milestone point
c Primavera Systems, Inc.			








**Contract No. HY/2003/19**  
**Improvement to Tung Chung Road**  
**3M Rolling Programme 01.08.08 to 31.10.08**

Date	Revision	Checked	Approved
01AUG08	3M update		



Activity ID	Description	Orig Dur	% Comp	Early Start	Early Finish	2008												2008		
						2008			AUG				SEP			OCT			2008	
						MAY	JUN	JUL	04	11	18	25	01	08	15	22	29	06	13	20
Landscape Works in Undefined Section																				
S2-8000	Landscape Softworks in Undefined Section	24w1d	0	01APR09 *	31AUG09															
S2-8010	Establishment Works for Undefined Section	118w2d	0	01SEP09 *	31AUG11															



Start date	28JUN04	 Early bar
Finish date	30AUG12	 Progress bar
Data date	01AUG08	 Critical bar
Number/Version	Revision 15	 Summary bar
Page number	16A	 Summary point
Project name	RV1501	 Start milestone point
		 Finish milestone point
c Primavera Systems, Inc.		

**Contract No. HY/2003/19**  
**Improvement to Tung Chung Road**  
**3M Rolling Programme 01.08.08 to 31.10.08**

Date	Revision	Checked	Approved
01AUG08	3M update		

---

---

**APPENDIX O**  
**WASTE GENERATED QUANTITY**

---

---

## Contract No. HY/2003/19 – Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha

**Name of Department: Highways Department**

**Project Commencement Date: June 2004**

**Construction Completion Date: December 2009**

**Approved Project Cost: \$688.5 Million**

### Monthly Summary Waste Flow Table for Year 2008

Year	Actual Quantities of inert C&D Materials (in 10 <sup>3</sup> m <sup>3</sup> )					Actual Quantities of C&D Wastes (in 10 <sup>3</sup> Kg)									
	Total Quantity Generated	Broken Concrete <sup>(1)</sup>	Reused in the Contract	Reused in other Projects	Disposed as Public Fill	Metals		Paper/cardboard packaging		Plastic <sup>(2)</sup>		Chemical Waste	Site clearance waste <sup>(3)</sup>	Others, e.g. general refuse (in 10 <sup>3</sup> m <sup>3</sup> )	
						Disposal	Recycle	Disposal	Recycle	Disposal	Recycle	Disposal	Disposal	Disposal	Timber Waste
(a)	(b)	(c)	(d)	(e)											
Jan	1.230	0	1.128	0	0.102	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	73.61	1.235	0.065
Feb	1.875	0	0.762	0	1.113	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	34.21	1.425	0.075
Mar	1.064	0	0.858	0	0.206	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	56.82	1.520	0.080
Apr	0.994	0	0.765	0	0.229	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	84.54	1.900	0.100
May	1.335	0	1.020	0	0.315	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	78.21	1.752	0.095
Jun	0.755	0	0.467	0	0.288	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	86.76	1.895	0.124
<b>Sub-Total</b>	<b>7.253</b>	<b>0</b>	<b>4.997</b>	<b>0</b>	<b>2.253</b>	<b>N/A*</b>	<b>N/A*</b>	<b>N/A*</b>	<b>N/A*</b>	<b>N/A*</b>	<b>N/A*</b>	<b>0</b>	<b>414.15</b>	<b>9.727</b>	<b>0.539</b>
July	0.953	0	0.685	0	0.268	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	96.88	2.036	0.098
Aug															
Sept															
Oct															
Nov															
Dec															
<b>Total</b>	<b>8.206</b>	<b>0</b>	<b>5.682</b>	<b>0</b>	<b>2.521</b>	<b>N/A*</b>	<b>N/A*</b>	<b>N/A*</b>	<b>N/A*</b>	<b>N/A*</b>	<b>N/A*</b>	<b>0</b>	<b>511.03</b>	<b>11.763</b>	<b>0.637</b>

Note: \* Very small quantity of aluminum can, cardboard package and plastic bottle generated from site office were collected by the local resident.

(1) Broken concrete for recycling into aggregates

(2) Plastics refer to plastic bottles/containers, plastic sheets/foam from package material.

(3) Site clearance waste refers to vegetation and construction debris.

(4) Please note that the total quality generated is not equivalent to the summation of the items in column (b) to (e) as part of the quality of the reused material (column c) had been counted already.