


-CCECC & CRWJ Joint Venture

Contract No. HY/2003/19

**Improvement to Tung Chung Road
between Lung Tseng Tau and Cheung Sha**

**Monthly EM&A Report
(Version 2.0)**

June 2009

Certified By	 (Environmental Team Leader)
--------------	---

REMARKS:

The information supplied and contained within this report is, to the best of our knowledge, correct at the time of printing.

CINOTECH accepts no responsibility for changes made to this report by third parties.

CINOTECH CONSULTANTS LTD

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Tel: (852) 2151 2083

Fax: (852) 3107 1388

Email: info@cinotech.com.hk

TABLE OF CONTENTS

EXECUTIVE SUMMARY	1
1. INTRODUCTION	4
Background	4
Project Organizations	5
Construction Programme.....	5
Summary of EM&A Requirements	5
2. AIR QUALITY	6
Monitoring Requirements	6
Monitoring Locations	6
Monitoring Equipment	6
Monitoring Parameters, Frequency and Duration	7
Monitoring Methodology and QA/QC Procedure	7
Results and Observations	8
3. NOISE	9
Monitoring Requirements	9
Monitoring Locations	9
Monitoring Equipment	10
Monitoring Parameters, Frequency and Duration	10
Monitoring Methodology and QA/QC Procedures	10
Maintenance and Calibration.....	11
Results and Observations	11
4. WATER QUALITY	12
Monitoring Requirements	12
Monitoring Equipment	12
Monitoring Parameters, Frequency and Duration	12
Monitoring Locations	13
Monitoring Methodology, Calibration Details and QA/QC Procedures	13
Maintenance and Calibration.....	14
Results and Observations	14
5. ENVIRONMENTAL AUDIT.....	16
Site Audits	16
Review of Environmental Monitoring Procedures.....	16
Status of Environmental Licensing and Permitting.....	16
Status of Waste Management.....	17
Implementation Status of Environmental Mitigation Measures.....	17
Non-compliance Recorded during Site Inspections	25
Summary of Mitigation Measures Implemented	25
Summary of Exceedances of the Environmental Quality Performance Limit	25
Implementation Status of Event Action Plans.....	26
Summary of Complaint, Warning, Notification of any Summons and Successful Prosecution.....	26
6. FUTURE KEY ISSUES	28
Key Issues for the Coming Month.....	28

Monitoring Schedule for the Next Month	28
Construction Program for the Project (Construction Program for the Next Month).....	28
7. CONCLUSIONS AND RECOMMENDATIONS	29
Conclusions	29
Recommendations	29

LIST OF TABLES

Table I	Summary Table for Non-compliance Recorded in the Reporting Month
Table II	Summary Table for Key Information in the Reporting Month
Table 2.1	Locations for Air Quality Monitoring
Table 2.2	Air Quality Monitoring Equipment
Table 2.3	Impact Dust Monitoring Parameters, Frequency and Duration
Table 3.1	Noise Monitoring Stations
Table 3.2	Noise Monitoring Equipment
Table 3.3	Noise Monitoring Parameters, Frequency and Duration
Table 4.1	Water Quality Monitoring Equipment
Table 4.2	Frequency and Parameters of Water Quality Monitoring
Table 4.3	Water Quality Monitoring Locations
Table 4.4	Summary of Water Quality Exceedances in the reporting month
Table 5.1	Summary of Environmental Licensing and Permit Status
Table 5.2	Observations and Recommendations of Site Inspections

LIST OF FIGURES

Figure 1	Layout Plan of the Project
Figure 2	Organization Chart
Figure 3	Monitoring Locations (7 sheets total)

LIST OF APPENDICES

A	Action and Limit Levels for Air Quality, Noise and Water Quality
B	Copies of Calibration Certificates
C	Environmental Monitoring Schedules
D	24-hour TSP Monitoring Results, Graphical Presentations and Wind Data
E	Noise Monitoring Results and Graphical Presentations
F	Water Quality Monitoring Results and Graphical Presentations
G	Quality Control Reports for Laboratory Analysis
H	Summary of Exceedances
I	Site Audit Summary
J	Environmental Mitigation Implementation Schedule (EMIS)
K	Event Action Plans
L	Complaint Logs
M	Summary of Warnings/Direction issued by the EPD and Prosecution
N	Construction Programme
O	Waste Generated Quantity

ABBREVIATION AND ACRONYM

AL Levels	Action and Limit Levels
E / ER	Engineer/Engineer's Representative
EIA	Environmental Impact Assessment
EM&A	Environmental Monitoring and Audit
EMIS	Environmental Mitigation Implementation Schedule
EP	Environmental Permit
EPD	Environmental Protection Department
ET	Environmental Team
HVS	High Volume Sampler
HyD	Highways Department
IEC	Independent Environmental Checker
NOE	Notification of Exceedance
QA/QC	Quality Assurance / Quality Control
RE	Resident Engineer
RH	Relative Humidity
SLM	Sound Level Meter
TSP	Total Suspended Particulates
WMP	Waste Management Plan

EXECUTIVE SUMMARY

Introduction

1. This is the 56th monthly Environmental Monitoring and Audit (EM&A) Report prepared by Cinotech Consultants Limited for the project “Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha” (the Project). This report documents the findings of EM&A Works conducted in June 2009.
2. The construction activities undertaken in the reporting month included:
 - Landscaping works;
 - Street furniture installation;
 - Utilities installation;
 - Construction of drainage;
 - Reinstatement works of the footpath;
 - Construction of the baffle wall and stepped channel; and
 - Construction of retaining wall.

Environmental Monitoring Works

3. Environmental monitoring for the Project was performed regularly as stipulated in the Updated EM&A Manual (Revision C) and the results were checked and reviewed. Site audits were conducted once per week. The implementation of the environmental mitigation measures, Event Action Plans and environmental complaint handling procedures were also checked.
4. Summary of exceedance of noise, air and water quality monitoring for the reporting month is tabulated in Table I.

Table I Summary Table for Exceedance Recorded in the Reporting Month

Parameter	Number of Exceedances due to the Project		Action Taken	Results of Action Taken
	Action Level	Limit Level		
Air Quality	0	0	N.A.	N.A.
Noise	0	0	N.A.	N.A.
Water Quality	0	0	N.A.	N.A.

Air Quality

5. 24-hr TSP monitoring at 3 monitoring stations, AM1, AM2 and AM4, were conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded for 24-hr TSP monitoring in the reporting month.

Construction Noise

6. Noise monitoring at 7 designated monitoring stations, namely NM1, NM2, NM3, NM4, NM5, NM6 and NM8, were conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded in the reporting month.

Water Quality

7. Water quality monitoring was conducted as scheduled at designated monitoring stations (Streams 15, 18, 21, 23, 26, 27, 40, Cheung Sha Stream, Tung Chung Stream and Tung Chung Bay) which are under the influence of the works in the reporting month. No water monitoring was conducted at the streams which were observed dry in the reporting month. As the water depth of Tung Chung Bay was less than 3m, only the mid-depth level was monitored.
8. Exceedances of suspended solids (SS) were recorded in the reporting month. No direct evidence demonstrated that the exceedances were caused by the Project.

Environmental Licensing and Permitting

9. License/Permits granted to the Project include Environmental Permit (License No.: EP-170/2003/C), Registration of Chemical Waste Producer (License: WPN5214-950-C1213-01), Water Discharge License (License No.: EP890/W7/XP089, EP890/W7/XP090 and EP890/W2/XG013).

Key Information in the Reporting Month

10. Summary of key information in the reporting month is tabulated in Table II.

Table II Summary Table for Key Information in the Reporting Month

Event	Event Details		Action Taken	Status	Remark
	Number	Nature			
Complaint received	1	Water Quality	Complaint investigation	Investigation report was submitted	---
Changes to the assumptions and key construction / operation activities recorded	0	---	N.A.	N.A.	---
Notifications of any summons received	0	---	N.A.	N.A.	---
Notifications of any successful prosecution received	0	---	N.A.	N.A.	---

Complaints and Prosecutions

11. A total of 1 environmental complaint was received in the reporting month.
12. No warning and summon or notification of successful prosecution was received in the reporting month.

Future Key Issues

13. Key issues to be considered in the coming month include:
 - Runoff from exposed slope;
 - Wastewater and runoff discharge from site;
 - Regular removal of silt, mud and sand along u-channels, culverts and gullies;
 - Review and implementation of temporary drainage system for the surface runoff;
 - Proper storage of construction materials near streams;
 - Noise from operation of the equipment, especially for rock-breaking activities and machinery on-site;
 - Dust generation from stockpiles of dusty materials, exposed retain wall, excavation works and rock breaking activities;
 - Storage of chemicals/fuel and chemical waste/waste oil on site;
 - Watering for rock breaking activity, soil nailing and on haul road;
 - Accumulation of general and construction waste near stream and on site;
 - Proper sorting and segregation of C&D materials in designated areas; and
 - Provide wheel washing facilities at the site entrance/exit.

1. INTRODUCTION

Background

- 1.1 The Project “Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha” involves the widening and realignment of Tung Chung Road between Lung Tseng Tau in North Lantau and Cheung Sha in South Lantau. The layout plan of the Project is shown in Figure 1.
- 1.2 The scope of the Project includes:
- a) widening and realignment of a 3.6 km section of Tung Chung Road (TCR) between Lung Tseng Tau and Pak Kung Au from a single-lane road for two-way traffic to a single two-lane road for two-way traffic with a footpath having a minimum width of 1.6 m, and construction of a 2.6 km long single two-lane road between Pak Kung Au and Cheung Sha, including elevated highway structures of a total length of 750 m, with a footpath of a minimum width of 1.6 m;
 - b) provision of 21 passing bays/bus-bays along the road and a roundabout at Cheung Sha; and
 - c) associated works including road rehabilitation, drainage, utility, environmental mitigation measures, landscaping, slope stabilization, traffic aids, road safety enhancement measures, lighting, traffic control and surveillance system, and electrical and mechanical (E&M) works.
- 1.3 The Environmental Impact Assessment (EIA) Report for the Project was approved on 4 July 2002 under the Environmental Impact Assessment Ordinance (EIAO). An Environmental Permit (EP- 170/2003) for the works was also granted on 27 June 2003. Two varied Environmental Permits (EP) (EP-170/2003/B and EP-170/2003/C) were issued in June 2006 and July 2007 respectively. Environmental Monitoring and Audit (EM&A) Manual for the Project was also included as part of the EIA reports in the register. An updated EM&A Manual (Revision C) has been issued on 28 April 2006.
- 1.4 Highways Department awarded the construction of the Project to CCECC & CRWJ Joint Venture (being a joint venture of China Civil Engineering Construction Corporation & China Railway Wujia Group Corporation) (hereinafter called “the Contractor”) in June 2004. The construction works commenced on 4 November 2004 and are scheduled to be completed by September 2007.
- 1.5 Cinotech Consultants Limited (Cinotech) was commissioned by the Contractor to undertake the Environmental Team (ET) Services for the Project since 1 September 2006. All environmental and audit works were conducted by Cinotech and the laboratory testing works were conducted by a HOKLAS laboratory, Wellab Limited. This is the 56th monthly EM&A report summarizing the EM&A works for the Project in July 2009.

Project Organizations

- 1.6 Different parties with different levels of involvement in the project organization include:
- Project Proponent – Major Works Project Management Office (MWPMO) of Highways Department (HyD)
 - Engineer (E) / Engineer's Representative (ER) – Mott Connell Limited
 - Contractor – CCECC & CRWJ Joint Venture
 - Environmental Team (ET) – Cinotech Consultants Limited
 - Independent Environmental Checker (IEC) – ENSR Asia (HK) Limited
- 1.7 The responsibilities of respective parties are detailed in Section 1.5 of the Updated EM&A Manual (Revision C, issued on 28 April 2006) of the Project. The project organization chart is presented in Figure 2.

Construction Programme

- 1.8 The construction activities undertaken in the reporting month were:

Northern Section

- Street furniture installation at Zone A to Zone F;
- Utilities installation at Zone A to Zone F; and
- Construction of DT and S&D Structure.

Southern Section

- Slope reinstatement works from STR010 to STR013.

Summary of EM&A Requirements

- 1.9 The EM&A programme requires construction phase monitoring for air quality and construction noise, water quality and environmental site audit. The EM&A requirements for each parameter are described in the following sections, including:
- All monitoring parameters;
 - Action and Limit levels for all environmental parameters;
 - Event Action Plans;
 - Environmental mitigation measures, as recommended in the project EIA report; and
 - Environmental requirements in contract documents.
- 1.10 The advice on the implementation status of environmental protection and pollution control/mitigation measures is summarized in Section 5 of this report.
- 1.11 This report presents the environmental monitoring results, observations, locations, equipment, period, methodology and QA/QC procedures of the required monitoring parameters, namely air quality, noise levels, water quality and audit works for the Project in the reporting month.

2. AIR QUALITY

Monitoring Requirements

- 2.1 Monitoring of 1-hour and 24-hour TSP was conducted to monitor the air quality. Appendix A shows the established Action/Limit Levels for the environmental monitoring works.

Monitoring Locations

- 2.2 In accordance with the updated EM&A Manual, 24-hour TSP monitoring shall only be conducted at the monitoring location when there are Project related construction activities being undertaken within a radius of 500 m from the monitoring location.
- 2.3 Five designated monitoring stations, AM1 to AM5 were selected for impact dust monitoring for the Project. Table 2.1 describes the air quality monitoring locations and Figure 3 shows their locations.

Table 2.1 Locations for Air Quality Monitoring

Monitoring Station	Description	Location
AM1	YMCA of Hong Kong Christian College	Rooftop
AM2	D 68 Leyburn Villas	House
AM3 ⁽¹⁾	Butterfly Crest	House
AM4	No. 31 South Lantau Road	House
AM5 ⁽²⁾	YWCA	To be confirmed

Remarks:

- ⁽¹⁾ Monitoring at AM3 will be conducted when the Project related construction activities are being undertaken within a radius of 500 m from the monitoring location.
- ⁽²⁾ Monitoring at AM5, YWCA, will be resumed when YWCA re-open.

Monitoring Equipment

- 2.4 Table 2.2 summarizes the equipment used for the air quality monitoring. Copies of calibration certificates are attached in Appendix B.

Table 2.2 Air Quality Monitoring Equipment

Equipment	Model and Make	Quantity
Calibrator	GMW25; S/N: 1536	1
HVS Sampler	Graseby GMW Model GS2310 High Volume TSP Sampler and associated equipment and shelter	3

Monitoring Parameters, Frequency and Duration

- 2.5 Table 2.3 summarizes the monitoring parameters and frequencies of impact dust monitoring for the whole construction period. The air quality monitoring schedule for the reporting period is shown in Appendix C.

Table 2.3 Impact Dust Monitoring Parameters, Frequency and Duration

Parameters	Frequency
1-hr TSP ^(a)	Three times / 6 days
24-hr TSP	Once / 6 days

Note:

(a) 1-hour TSP monitoring will be carried out in case that an exceedance of 24-hour TSP level is identified to be due to the Project.

Monitoring Methodology and QA/QC Procedure

Instrumentation

- 2.6 Graseby GMW Model GS2310 TSP High Volume Sampler (HVS) was employed for 1-hour & 24-hour TSP monitoring. The sampler was composed of a motor, a filter holder, a flow controller and a sampling inlet and its performance specification complied with that required by USEPA Standard Title 40, Code of Federation Regulations Chapter 1 (Part 50). Moreover, the HVS also met all the requirements in Section 3.2 of the Updated EM&A Manual.

Operating/Analytical Procedures

- 2.7 Operating/analytical procedures for the operation of HVS were as follows:
- A horizontal platform was provided with appropriate support to secure the samplers against gusty wind.
 - No two samplers were placed less than 2 meters apart.
 - The distance between the sampler and an obstacle, such as buildings, was at least twice the height that the obstacle protrudes above the sampler.
 - A minimum of 2 meters of separation from walls, parapets and penthouses was required for rooftop samples.
 - A minimum of 2 meters separation from any supporting structure, measured horizontally was required.
 - No furnaces or incineration flues were nearby.
 - Airflow around the sampler was unrestricted.
 - The sampler was more than 20 meters from the drip line.
 - Any wire fence and gate, to protect the sampler, should not cause any obstruction during monitoring.
- 2.8 Prior to the commencement of the dust sampling, the flow rate of the high volume sampler was properly set (between 1.1 m³/min. and 1.4 m³/min.) in accordance with the manufacturer's instruction to within the range recommended in USEPA Standard Title 40, CFR Part 50. For TSP sampling, fiberglass filters (G810) were used.

- 2.9 The power supply was checked to ensure the sampler worked properly. On sampling, the sampler was operated for 5 minutes to establish thermal equilibrium before placing any filter media at the designated air monitoring station.
- 2.10 The filter holding frame was then removed by loosening the four nuts and a weighted and conditioned filter was carefully centered with the stamped number upwards, on a supporting screen.
- 2.11 The filter was aligned on the screen so that the gasket formed an airtight seal on the outer edges of the filter. Then the filter holding frame was tightened to the filter holder with swing bolts. The applied pressure should be sufficient to avoid air leakage at the edges.
- 2.12 The shelter lid was closed and secured with the aluminum strip. The timer was then programmed. Information was recorded on the record sheet, which included the starting time, the weather condition and the filter number (the initial weight of the filter paper can be found out by using the filter number). After sampling, the filter was removed and sent to the laboratory for weighing. The elapsed time was also recorded.
- 2.13 Before weighing, all filters were equilibrated in a conditioning environment for 24 hours. The conditioning environment temperature should be between 25°C and 30°C and not vary by more than $\pm 3^\circ\text{C}$; the relative humidity (RH) should be $< 50\%$ and not vary by more than $\pm 5\%$. A convenient working RH is 40%.

Maintenance/Calibration

- 2.14 The following maintenance/calibration was required for the HVS:
- The high volume motors and their accessories were properly maintained. Appropriate maintenance such as routine motor brushes replacement and electrical wiring checking were made to ensure that the equipment and necessary power supply are in good working condition.
 - High volume samplers were calibrated at bi-monthly intervals using GMW-25 Calibration Kit throughout all stages of the air quality monitoring.

Wind Data

- 2.15 Wind data was required to be taken from the Hong Kong Observatory Weather Stations including HK International Airport and Cheung Chau.

Results and Observations

- 2.16 24-hr TSP monitoring at 3 monitoring stations, AM1, AM2 and AM4, were conducted as scheduled in the reporting month.
- 2.17 The monitoring data, graphical presentations and wind data for the reporting month are summarized in Appendix D. No Action/Limit Level exceedance was recorded for 24-hr TSP monitoring in the reporting month.

3. NOISE

Monitoring Requirements

- 3.1 Monitoring and audit of construction noise levels is required to be conducted, in accordance with the Updated EM&A Manual, to ensure that any unacceptable noise impacts could be readily detected and timely and appropriate action be undertaken to rectify the situation.
- 3.2 The construction noise levels shall be measured in terms of the A-weighted equivalent continuous sound pressure level (Leq). Leq (30min) shall be used as the monitoring parameter for the time period between 0700-1900 hours on normal weekdays. For all other time periods, Leq (5min) shall be employed for comparison with the Noise Control Ordinance (NCO) criteria. As supplementary information for data auditing, statistical results such as L₁₀ and L₉₀ shall also be obtained for reference.

Monitoring Locations

- 3.3 In accordance with the Updated EM&A Manual, noise monitoring shall only be conducted at the monitoring location when there are Project related construction activities being undertaken within a radius of 300m from the monitoring location.
- 3.4 Eight designated noise monitoring stations, NM1 to NM8 were selected for noise impact monitoring. Appendix A shows the established Action and Limit Levels for the environmental monitoring works. Table 3.1 describes the noise monitoring locations and Figure 3 shows their locations.

Table 3.1 Noise Monitoring Stations

Stations	Description	Location
NM1	No. 28 Lung Tseng Tau	Ground Floor
NM2	YMCA of Hong Kong Christian College	Rooftop
NM3	No. 37 Shek Lau Po	Ground Floor
NM4	No. 1 Shek Mun Kap	Ground Floor
NM5	Tung Chung Au Country Parks Management Centre	Ground Floor
NM6	D75 Leyburn Villa	Ground Floor
NM7 ⁽¹⁾	House in Butterfly Crest House 22	Rooftop
NM8	No. 31 South Lantau Road	Ground Floor

Remarks:

- ⁽¹⁾ Monitoring at NM7 will be conducted when the Project related construction activities are being undertaken within a radius of 300 m from the monitoring location.

Monitoring Equipment

- 3.5 Table 3.2 summarizes the noise monitoring equipment model being used. Copies of calibration certificates are attached in Appendix B.

Table 3.2 Noise Monitoring Equipment

Equipment	Model and Make	Quantity
Integrating Sound Level Meter	B&K Model 2238	4
Calibrator	K 4231	3
Wind Speed Anemometer	RS232 Integral Vane Digital Anemometer	1

Monitoring Parameters, Frequency and Duration

- 3.6 Table 3.3 summarizes the monitoring parameters, frequency and total duration of monitoring. The noise monitoring schedule is attached in Appendix C.

Table 3.3 Noise Monitoring Parameters, Frequency and Duration

Station	Parameter	Period ¹	Frequency	Measurement
NM1	L ₁₀ (30 min.)dB(A) L ₉₀ (30 min.)dB(A) L _{eq} (30 min.)dB(A)	(a) 0700-1900 hrs. on weekdays (b) 1900-2300 hrs. on weekdays (c) 0700-2300 hrs. on holidays (d) 2300-0700 hrs on any days	Once every 6 working days	Façade ⁽¹⁾
NM2				Façade ⁽¹⁾
NM3				Façade ⁽¹⁾
NM4				Façade ⁽¹⁾
NM5				Façade ⁽¹⁾
NM6				Façade ⁽¹⁾
NM7				Façade ⁽¹⁾
NM8				Façade ⁽¹⁾

Remarks:

⁽¹⁾Noise measurements were taken at 1m from the exterior of the building facade.

(b), (c) and (d) will only be conducted if construction works are undertaken during these periods.

Monitoring Methodology and QA/QC Procedures

- The Sound Level Meter was generally set on a tripod at a height of 1.2 m above the ground, depending to the actual monitoring condition.
- For free field measurement (if any), the meter was positioned away from any nearby reflective surfaces. All records for free field noise levels were adjusted with a correction of +3 dB(A).
- The battery condition was checked to ensure the correct functioning of the meter.
- Parameters such as frequency weighting, the time weighting and the measurement time were set as follows:

- frequency weighting : A
- time weighting : Fast
- time measurement : 30 minutes / 5 minutes
- Prior to and after each noise measurement, the meter was calibrated using a Calibrator for 94.0 dB at 1000 Hz. If the difference in the calibration level before and after measurement was more than 1.0 dB, the measurement would be considered invalid and repeat of noise measurement would be required after re-calibration or repair of the equipment.
- The wind speed was frequently checked with the portable wind meter.
- At the end of the monitoring period, the L_{eq} , L_{90} and L_{10} were recorded. In addition, site conditions and noise sources were recorded on a standard record sheet.
- Noise measurement was paused during periods of high intrusive noise if possible and observation was recorded when intrusive noise was not avoided.
- Noise monitoring was cancelled in the presence of fog, rain, and wind with a steady speed exceeding 5 m/s, or wind with gusts exceeding 10 m/s.

Maintenance and Calibration

- 3.7 The microphone head of the sound level meter and calibrator was cleaned with soft cloth regularly. The meters were sent to the supplier to check and calibrate on a yearly interval.

Results and Observations

- 3.8 Noise monitoring was conducted as scheduled at the seven designated stations NM1, NM2, NM3, NM4, NM5, NM6 and NM8, in this reporting month.
- 3.9 Noise monitoring results and graphical presentations are shown in Appendix E.
- 3.10 No Action/Limit Level exceedance was recorded in the reporting month.

4. WATER QUALITY

Monitoring Requirements

- 4.1 Water quality monitoring was conducted in accordance with the Updated EM&A Manual. Appendix A shows the established Action Limit Levels for the environmental monitoring works.

Monitoring Equipment

- 4.2 Table 4.1 summarizes the equipment used in the impact water quality monitoring program. All the monitoring equipment complied with the specifications stipulated in the EM&A Manual. Copies of the calibration certificates of the equipment are attached in Appendix B.

Table 4.1 Water Quality Monitoring Equipment

Equipment	Model and Make	Qty.
Multi-parameter Water Quality System	YSI 6820	2

Monitoring Parameters, Frequency and Duration

- 4.3 Table 4.2 summarizes the monitoring parameters, monitoring period and frequencies of water quality monitoring. The water quality monitoring schedule is attached in Appendix C.
- 4.4 In-situ measurements were taken at designated monitoring stations which are under the influence of the works at least three times per week during the course of the construction period. In addition, water samples for suspended solid analysis have been collected at the designated stations and delivered to Wellab for further laboratory analysis.

Table 4.2 Frequency and Parameters of Water Quality Monitoring

Parameters	Frequency	No. of Depth
DO Saturation (%), DO (mg/L), Turbidity (NTU), SS (mg/L), Temperature (°C), & pH	3 times per week	Sub-surface

Monitoring Locations

- 4.5 The water quality monitoring locations are shown in Figure 3 and their details are provided in Table 4.3.

Table 4.3 Water Quality Monitoring Locations

Monitoring Station (Stream No.)	Type	Easting	Northing
Tung Chung Stream	Reference	811853	813289
	Impact	811601	813716
Cheung Sha Stream	Reference	812525	811980
	Impact	812447	811165
Stream 15	Reference	811853	813289
	Impact	811781	813298
Stream 18	Reference	811889	813107
	Impact	811836	813138
Stream 19	Reference	811920	812927
	Impact	811858	812987
Stream 21	Reference	811994	812695
	Impact	811873	812723
Stream 23	Reference 1	811980	812589
	Reference 2	812079	812386
	Impact	811894	812658
Stream 25	Reference	812353	812052
	Impact	812324	812017
Stream 26	Reference	812525	811980
	Impact	812456	811895
Stream 27	Reference	812658	811770
	Impact	812604	811747
Stream 32	Reference	812980	811410
	Impact	812988	811327
Stream 35	Reference	813231	811275
	Impact	813218	811218
Stream 40	Reference	813686	811311
	Impact	813690	811211
Tung Chung Bay	Reference	810679	816038
	Impact	810787	815706

Monitoring Methodology, Calibration Details and QA/QC Procedures

Instrumentation

- 4.6 A multi-parameter meter (Model YSI 6820 CE-C-M-Y) was used to measure DO, turbidity, salinity, pH and temperature.

Operating/Analytical Procedures

- 4.7 At each monitoring location, two consecutive measurements were taken for water samples being collected on site. The probes were retrieved out of the water after the first measurement and then re-deployed for the second measurement. Where the difference in the value between the first and second readings of each set was more than 25% of the value of the first reading, the reading was discarded and further readings were taken.
- 4.8 For SS, measurement and grab samples of surface water were collected. Water samples of about 1,000 ml were collected and stored in polyethylene bottles. Following collection, water samples were stored in high density polythene bottles with preservative appropriately added, packed in ice and cooled to 4°C (without being frozen), delivered to the HOKLAS accredited laboratory, Wellab Limited and analyzed.

Maintenance and Calibration

- 4.9 Before each round of monitoring, a zero check in distilled water was performed with the turbidity probe of YSI 6820. The probe was then calibrated with a solution of known NTU.

Results and Observations

- 4.10 Water quality monitoring was conducted as scheduled at designated monitoring stations (Streams 15, 18, 21, 23, 26, 27, 40, Cheung Sha Stream, Tung Chung Stream and Tung Chung Bay), which are under the influence of the works, in the reporting month. No water monitoring was conducted at the streams which were observed dry in the reporting month.
- 4.11 During monitoring, the weather conditions were generally sunny. The monitoring data and graphical presentations of the monitoring results are shown in Appendix F and the Quality Control reports for the laboratory analysis are provided in Appendix G.
- 4.12 Exceedances of suspended solids (SS) were recorded in water samples in the reporting month. The exceedance reports are attached in Appendix H. The summary of exceedances for each water quality parameters are provided in Table 4.4.

Table 4.4 Summary of Water Quality Exceedances in the reporting month

Station No.	DO		pH	Turbidity		SS	
	Action	Limit	Limit	Action	Limit	Action	Limit
15_I	0	0	0	0	0	0	0
18_I	0	0	0	0	0	0	0
19_I*	0	0	0	0	0	0	0
21_I	0	0	0	0	0	0	0
23_I	0	0	0	0	0	0	0
25-I*	0	0	0	0	0	0	0
26_I	0	0	0	0	0	0	0
27_I	0	0	0	0	0	14	0
32_I*	0	0	0	0	0	0	0
35_I*	0	0	0	0	0	0	0
40_I	0	0	0	0	0	0	0
CSS_I	0	0	0	0	0	0	0
TCB_I	0	0	0	0	0	0	0
TCS_I	0	0	0	0	0	0	0

Remarks: * indicates the stream was not sampled in the reporting month.

- 4.13 As shown in the exceedance reports attached in Appendix H, all exceedances for water quality parameters recorded in the reporting month were not due to the Project based on the following observations:
- ✧ No construction activity was observed in the vicinity of the sampling locations.
 - ✧ No pollution discharge from construction activity was observed.
 - ✧ Measured value at the reference station was higher than at the impact monitoring stations.
- 4.14 According to the ET's investigation, no direct evidence demonstrated the exceedances of Action/Limit level for water monitoring parameters were caused by the Project.

5. ENVIRONMENTAL AUDIT

Site Audits

- 5.1 Site audits were carried out on a weekly basis to monitor the timely implementation of proper environmental management practices and mitigation measures in the Project site.
- 5.2 ET site audits were conducted on 4th, 10th, 18th and 25th June 2009 in the reporting month. IEC site inspection was conducted on 10th June 2009. The summaries of site audits are attached in Appendix I.

Review of Environmental Monitoring Procedures

- 5.3 The monitoring works conducted by the monitoring team were inspected regularly. The following observations were recorded for the monitoring works:

Air Quality Monitoring

- The monitoring team recorded all observations around the monitoring stations within and outside of the construction site.
- The monitoring team recorded the temperature, air pressure and weather conditions on the monitoring day.

Noise Monitoring

- The monitoring team recorded all observations around the monitoring stations, which might affect the monitoring result.
- Major noise sources were identified and recorded. Other intrusive noise attributing to the result was trimmed off by pausing the monitoring temporarily.

Water Quality Monitoring

- The monitoring team recorded all observations around the monitoring stations, which might affect the monitoring result.
- The monitoring team recorded the weather and river conditions on the monitoring day.

Status of Environmental Licensing and Permitting

- 5.4 All permits/licenses obtained for the Project are summarized in Table 5.1.

Table 5.1 Summary of Environmental Licensing and Permit Status

Permit No.	Valid Period		Details	Status
	From	To		
Environmental Permit (EP)				
EP-170/2003/C	31/7/07	N/A	Construction of (a) Widening and realignment of an approximate 3.6 kilometre long section of Tung Chung Road between Lung Tseng Tau and Pak Kung Au from a single-lane road for two-way traffic to a single two-lane road with footpath; (b) Construction of an approximate 2.6 kilometre long single two-lane road between Pak Kung Au and Cheung Sha with footpath and elevated highway structures; and © Provision of passing bays/bus lay-bys along Tung Chung Road.	Valid
Registration of Chemical Waste Producer				
WPN5214 – 950-C1213-01	---	N/A	Chemical waste types: spent Indication oil, surplus paint, spent diesel, spent thinner, mixing residue containing pesticides, spent mineral oil	Valid
Water Discharge License				
EP890/W7/XP089	---	N/A	Discharge from Sewage Treatment System (Northern Section)	Valid
EP890/W7/XP090	---	N/A	Industrial discharge (Northern Section)	Valid
EP890/W2/XG013	---	N/A	Industrial discharge (Southern Section)	Valid

Status of Waste Management

- 5.5 The waste management of the Project has to follow the requirements and procedures stated in the Waste Management Plan which was prepared by the Contractor.
- 5.6 The solid waste generated from the Project was mainly general refuse that was collected by a licensed collector on an as need basis.
- 5.7 The monthly summary of waste flow table and the timber summary for June 2009 are provided in Appendix O.

Implementation Status of Environmental Mitigation Measures

- 5.8 During site inspections in the reporting month, no non-conformance was identified. The observations and recommendations are summarized in Table 5.2.

Table 5.2 Observations and Recommendations of Site Inspections

Parameters	Date	Observations and Recommendations	Follow-up
<i>Water Quality</i>	04/06/09	Silt and sediment was observed discharging to the catchwater from the exposed slope especially at underneath STR 17, 18 . The Contractor was reminded to cover/hydroseed the exposed slope immediately especially during rainstorm.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	04/06/09	Stream water at Stream 20 was observed not diverted properly around the works. The Contractor was reminded to review and re-arrange the stream diversion to prevent any wastewater discharging out.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	04/06/09	Seepage of silty water from the hole of concrete bund was observed at SD5-11 . The Contractor was reminded to provide mitigation measures to prevent any wastewater from discharging to the downstream.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	04/06/09	Concrete debris was observed at Stream 21 due to the concrete breaking before. The Contractor was reminded to clear the debris and ensure the stream water in good condition	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	04/06/09	The Contractor was reminded of the followings: - Provide sand bag at the culvert at Shan Shek Wan.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	04/06/09	The Contractor was reminded of the followings: - Clear the construction waste, silt, debris and sediment in the culvert and U-channel along Tung Chung Road (Southern and Northern Sections) especially at STR17, Shan Shek Wan, CH7000, near Stream 20, Pak Kung Au, SD7-13, SD6-12, SD5-11, SD4-7 and underneath STR7.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	04/06/09	The Contractor was reminded of the followings: - Properly cover/compact the exposed area at between Stream 20 and 19, near stream 21, SD4-7, SD6-12 and underneath STR 14 when the works were not undertaken.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	04/06/09	The Contractor was reminded of the followings: - Clear the stagnant water at the wheel washing bay (abandoned) at Site Office, pit area at near SD7-13 and the hole for handrail along Southern Section of Tung Chung Road.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	10/06/09	Silt and sediment was observed discharging to the catchwater from the exposed slope due to the soil erosion especially at underneath STR 16, 17 and 18 . The Contractor was reminded to provide mitigation measures to protect the slope (In-progress).	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	10/06/09	Stream water at Stream 20 was observed not diverted properly around the works. The Contractor was reminded to review and re-arrange the stream diversion to prevent any wastewater discharging out.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.

Parameters	Date	Observations and Recommendations	Follow-up
	10/06/09	Seepage of silty water from the hole of concrete bund was observed at SD5-11 . The Contractor was reminded to provide mitigation measures to prevent any silty water from discharging to the downstream.	Rectification/improvement was observed during the follow-up audit session.
	10/06/09	Concrete debris was observed at Stream 21 due to the concrete breaking before. The Contractor was reminded to clear the debris and ensure the stream water in good condition	Rectification/improvement was observed during the follow-up audit session.
	10/06/09	The Contractor was reminded of the followings: - Provide sand bag at the culvert at Shan Shek Wan.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	10/06/09	The Contractor was reminded of the followings: - Clear the construction waste, silt, debris and sediment in the culvert and U-channel along Tung Chung Road (Southern and Northern Sections) especially at STR17, Shan Shek Wan, CH7000, near Stream 20, Pak Kung Au, SD7-13, SD6-12, SD5-11, SD4-7 and underneath STR7.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	10/06/09	The Contractor was reminded of the followings: - Properly cover/compact the exposed area at between Stream 20 and 19 , near stream 21, SD4-7, SD6-12 and underneath STR 14 after the links.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	10/06/09	The Contractor was reminded of the followings: - Clear the standing water at the wheel washing bay (abandoned) at Site Office , pit area at near SD7-13 and the hole for handrail along Southern Section of Tung Chung Road .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	10/06/09	The Contractor was reminded of the followings: - Properly maintain the sand bag bund at near stream 20 .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	10/06/09	The Contractor was reminded of the followings: - Provide mosquito larvicide for the stagnant water at Shan Shek Wan	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	18/06/09	Soil erosion was observed at STR 16, 17, 18 and near Stream 35 . The Contractor was reminded to provide mitigation measures to protect the slope. (In – progress).	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	18/06/09	Stream water at Stream 20 was observed not diverted properly around the works. The Contractor was reminded to review and re-arrange the stream diversion to prevent any wastewater discharging out.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	18/06/09	Sediment was observed from discharging to the culverts at SD5-11 and SD6-12. The Contractor was reminded to clear the culvert and provide mitigation measures to prevent further sediment from discharging to the culvert.	Rectification/improvement was observed during the follow-up audit session.

Parameters	Date	Observations and Recommendations	Follow-up
	18/06/09	The Contractor was reminded of the followings: - Provide sand bag at the culvert at Shan Shek Wan.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	18/06/09	The Contractor was reminded of the followings: - Clear oil stain at underneath STR7 .	Rectification/improvement was observed during the follow-up audit session.
	18/06/09	The Contractor was reminded of the followings: - Clear the construction waste, silt, debris and sediment in the culvert and U-channel along Tung Chung Road (Southern and Northern Sections) especially at STR17, Shan Shek Wan, CH7000, near Stream 20, Pak Kung Au, SD7-13, SD6-12, SD5-11, SD4-7 and underneath STR7 .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	18/06/09	The Contractor was reminded of the followings: - Properly cover/compact the exposed area at between Stream 20 and 19, near stream 21, SD4-7, SD6-12 and underneath STR 7 and STR 14 after the works.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	18/06/09	The Contractor was reminded of the followings: - Clear the standing water at the wheel washing bay (abandoned) at Site Office , pit area at near SD7-13 .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	18/06/09	The Contractor was reminded of the followings: - Properly maintain the sand bag bund at near Stream 20.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	18/06/09	The Contractor was reminded of the followings: - Provide mosquito larvicide for the stagnant water at Shan Shek Wan.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	25/06/09	Soil erosion was observed at STR 16, 17, 18 and near Stream 35 . The Contractor was reminded to provide mitigation measures to protect the slope. (In – progress).	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	25/06/09	Stream water at Stream 20 was observed not diverted properly around the works. The Contractor was reminded to review and re-arrange the stream diversion to prevent any wastewater discharging out.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	25/06/09	Silty water was observed at Stream 23 . However, the silty water was due to the broken water pipe from other construction site at old Tung Chung Road . The item was also observed to be rectified during the site inspection.	Rectification/improvement was observed during the follow-up audit session.
	25/06/09	The Contractor was reminded of the followings: - Provide sand bag at the culvert at Shan Shek Wan.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.

Parameters	Date	Observations and Recommendations	Follow-up
	25/06/09	The Contractor was reminded of the followings: - Clear the construction waste, silt, debris and sediment in the culvert and U-channel along Tung Chung Road (Southern and Northern Sections) especially at STR17, Shan Shek Wan, CH7000, near Stream 20, Pak Kung Au, SD7-13, SD6-12, SD5-11, SD4-7 and underneath STR7.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	25/06/09	The Contractor was reminded of the followings: - Properly cover/compact the exposed area at between Stream 20 and 19, near stream 19, 21, SD4-7, SD5-11, SD6-12 and underneath STR 7 and STR 14 after the works.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	25/06/09	The Contractor was reminded of the followings: - Clear the standing water at the wheel washing bay (abandoned) at Site Office and Stream 21.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	25/06/09	The Contractor was reminded of the followings: - Properly maintain the sand bag bund at near Stream 20. (In-progress)	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	25/06/09	The Contractor was reminded of the followings: - Provide mosquito larvicide for the stagnant water at Shan Shek Wan.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	25/06/09	The Contractor was reminded of the followings: - Provide mitigation measures to prevent silty water flowing to the culvert at SD4-7.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
Air Quality	04/06/09	The Contractor was reminded of the followings: - Properly maintain the slopes which have been hydroseeded along Tung Chung Road (Southern and Northern Section) especially after the rainstorm.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	10/06/09	The Contractor was reminded of the followings: - Properly maintain the slopes which have been hydroseeded along Tung Chung Road (Southern and Northern Section) especially after the rainstorm.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	10/06/09	The Contractor was reminded of the followings: - Provide mitigation measures to prevent dust emission during cement de-bagging works and clean the remaining cement after the works at SD 4-7.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	18/06/09	The Contractor was reminded of the followings: - Properly maintain the slopes which have been hydroseeded along Tung Chung Road (Southern and Northern Section) especially after the rainstorm.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	18/06/09	The Contractor was reminded of the followings: - Provide mitigation measures to prevent dust emission during cement de-bagging works and clean the remaining cement after the works at SD 4-7.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.

Parameters	Date	Observations and Recommendations	Follow-up
	25/06/09	The Contractor was reminded of the followings: - Properly maintain the slopes which have been hydroseeded along Tung Chung Road (Southern and Northern Section) especially after the rainstorm.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	25/06/09	The Contractor was reminded of the followings: - Provide mitigation measures to prevent dust emission during cement de-bagging works and clean the remaining cement after the works at SD 4-7 .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
Waste / Chemical Management	04/06/09	Empty oil containers were observed at underneath STR 7, near Stream 20, 21 and SD4-7 . The Contractor was reminded to dispose them as chemical waste.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	04/06/09	Discarded hose were observed at Shan Shek Wan . The Contractor was reminded to clear them.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	04/06/09	The Contractor was reminded of the followings: - Clear C&D waste and discarded cement bags at underneath STR7 .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	04/06/09	The Contractor was reminded of the followings: - Clear general refuse at underneath STR7 .	Rectification/improvement was observed during the follow-up audit session.
	04/06/09	The Contractor was reminded of the followings: - Clear the discarded “protection material for hydroseed” that was hanging on the trees along Southern Section of Tung Chung Road .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	04/06/09	The Contractor was reminded of the followings: - Clear C&D waste at near SD7-13, SD6-12, SD5-11 and SD4-7 .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	04/06/09	The Contractor was reminded of the followings: - Clear vegetation waste along Tung Chung Road especially near the catchwater.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	04/06/09	The Contractor was reminded of the followings: - Keep clear and sort C&D waste at Shan Shek Wan .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	10/06/09	Empty oil containers were observed at underneath STR 7, near Stream 20, 21 and SD4-7 . The Contractor was reminded to dispose them as chemical waste.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	10/06/09	Discarded hose were observed at Shan Shek Wan . The Contractor was reminded to clear them.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	10/06/09	The Contractor was reminded of the followings: - Clear C&D waste and discarded cement bags at underneath STR7 .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.

Parameters	Date	Observations and Recommendations	Follow-up
	10/06/09	The Contractor was reminded of the followings: - Clear oil stain at underneath STR7 .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	10/06/09	The Contractor was reminded of the followings: - Clear the discarded “protection material for hydroseed” that was hanging on the trees along Southern Section of Tung Chung Road .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	10/06/09	The Contractor was reminded of the followings: - Clear C&D waste at near SD7-13, SD6-12, SD5-11 and SD4-7 .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	10/06/09	The Contractor was reminded of the followings: - Clear vegetation waste along Tung Chung Road especially near the catchwater.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	10/06/09	The Contractor was reminded of the followings: - Keep clear and sort C&D waste at Shan Shek Wan .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	18/06/09	Empty oil containers were observed at underneath STR 7, near Stream 20, 21 and SD4-7. The Contractor was reminded to dispose them as chemical waste.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	18/06/09	Discarded hose were observed at Shan Shek Wan . The Contractor was reminded to clear them.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	18/06/09	The Contractor was reminded of the followings: - Clear C&D waste and discarded cement bags at underneath STR7.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	18/06/09	The Contractor was reminded of the followings: - Clear oil stain at underneath STR7.	Rectification/improvement was observed during the follow-up audit session.
	18/06/09	The Contractor was reminded of the followings: - Clear the discarded “protection material for hydroseed” that was hanging on the trees along Southern Section of Tung Chung Road .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	18/06/09	The Contractor was reminded of the followings: - Clear C&D waste and sediment at SD6-12, SD5-11 and SD4-7 .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	18/06/09	The Contractor was reminded of the followings: - Clear vegetation waste along Tung Chung Road especially near the catchwater and underneath STR 7 .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	18/06/09	The Contractor was reminded of the followings: - Keep clear and sort C&D waste at Shan Shek Wan .	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.

Parameters	Date	Observations and Recommendations	Follow-up
	25/06/09	Empty oil containers were observed at underneath STR 7, near Stream 20, 21 and SD4-7. The Contractor was reminded to dispose them as chemical waste.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	25/06/09	Discarded hose were observed at Shan Shek Wan. The Contractor was reminded to clear them.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	25/06/09	The Contractor was reminded of the followings: - Discarded cement bag's at underneath STR7.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	25/06/09	The Contractor was reminded of the followings: - Clear the discarded "protection material for hydroseed" that was hanging on the trees along Southern Section of Tung Chung Road.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	25/06/09	The Contractor was reminded of the followings: - Clear C&D waste and sediment at SD6-12, SD5-11, SD4-7 and Stream 20.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	25/06/09	The Contractor was reminded of the followings: - Clear vegetation waste along Tung Chung Road especially near the catchwater and underneath STR 7.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	25/06/09	The Contractor was reminded of the followings: - Keep clear and sort C&D waste at Shan Shek Wan.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	25/06/09	The Contractor was reminded of the followings: - Clear the stockpile at underneath STR 7.	Rectification/improvement was observed during the follow-up audit session.
Ecology	04/06/09	The Contractor was reminded of the followings: - Clear C&D waste and general refuse at Stream 21, 22, 27, 30, 34 and 36-38.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	10/06/09	The Contractor was reminded of the followings: - Clear C&D waste and general refuse at Stream 21, 22, 27, 30, 34 and 36-38.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	18/06/09	The Contractor was reminded of the followings: - Clear C&D waste and general refuse at Stream 21, 22, 27, 30, 34 and 36-38.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	25/06/09	The Contractor was reminded of the followings: - Clear C&D waste and general refuse at Stream 21, 22, 27, 30, 34 and 36-38.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
General	04/06/09	The Contractor was reminded of the followings: - Provide mitigation measures at between the outstanding construction area and paved road to prevent any mud from carrying to the public road.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.

Parameters	Date	Observations and Recommendations	Follow-up
	10/06/09	The Contractor was reminded of the followings: - Provide mitigation measures at between the outstanding construction area and paved road to prevent any mud from carrying to the public road.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	18/06/09	The Contractor was reminded of the followings: - Provide mitigation measures at between the outstanding construction area and paved road to at SD6-12, Stream 20 and 21, site office to prevent any mud from carrying to the public road.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.
	25/06/09	The Contractor was reminded of the followings: - Provide mitigation measures at between the outstanding construction area and paved road to at SD6-12, Stream 20 and 21, site office to prevent any mud from carrying to the public road.	This item was not rectified during the follow-up audit session. Follow-up action was needed for the outstanding item.

Non-compliance Recorded during Site Inspections

5.9 No non-compliance was recorded in the reporting period.

Summary of Mitigation Measures Implemented

5.10 The Contractor has implemented the mitigation measures as recommended in the EIA and the Updated EM&A Manual. The mitigation measures implemented by the Contractor in the reporting month are summarized as follow:

Water Quality

- (1) Provided mitigation measures to prevent any silty water from discharging to the downstream at SD5-11.
- (2) Cleared the debris and ensure the stream water in good condition at Steam 21.
- (3) Cleared the culvert and provide mitigation measures to prevent further sediment from discharging to the culvert at SD5-11 and SD6-12.

Waste/Chemical Management

- (1) Cleared general refuse at underneath STR7.
- (2) Cleared oil stain at underneath STR7.
- (3) Cleared the stockpile at underneath STR 7.

5.11 According to the Updated EM&A Manual, mitigation measures are required to be implemented. An updated summary of the EMIS is provided in Appendix J.

Summary of Exceedances of the Environmental Quality Performance Limit

24-hr TSP Monitoring

5.12 No Action/Limit Level exceedance was recorded in the reporting month.

Construction Noise Monitoring

- 5.13 No Action/Limit Level exceedance was recorded in the reporting month.

Water Quality Monitoring

- 5.14 Exceedances of suspended solids (SS) were recorded in water samples in the reporting month. The summary of exceedances is provided in Table 4.4.
- 5.15 All exceedances recorded for water quality parameters in the reporting month were not considered due to the Project due to the following observations:
- ✧ No construction activity was observed in the vicinity of the sampling locations.
 - ✧ No pollution discharge from construction activity was observed.
 - ✧ Measured value at the reference station was higher than at the impact monitoring stations.
- 5.16 No direct evidence demonstrated the exceedances of Action/Limit level for water monitoring parameters in the reporting month were caused by the Project.

Implementation Status of Event Action Plans

- 5.17 The Event Action Plans for air quality, noise and water quality are presented in Appendix K.
- 5.18 No valid exceedance of Action and Limit levels for air quality, noise and water quality monitoring due to the Project was recorded. No action was required to be carried out.

Summary of Complaint, Warning, Notification of any Summons and Successful Prosecution

- 5.19 A total of 1 environmental complaint was received in the reporting month.
- 5.20 The complaint was raised by the WSD on 1st June 2009. WSD concerned about the soiled water had been collected from New Tung Chung Road and soil erosion was found at Cheung Sha Catchwater. The ETL of the Project was informed of the complaint by CCJV through the e-mail on 5th June 2009 and initiated the complaint investigation procedures. The Complaint letter from WSD (Ref: (21)in WSD (HK) 1743/664/01 Pt.18 TJ(5).
- 5.21 Base on the information collected, the complaint was considered justifiable as heavy downpour of rain had caused soil erosion on exposed slopes leading to Cheung Sha Catchwater.
- 5.22 The Contractor was recommended to take sufficient mitigation measures to minimize the exposed areas to rain by covering the exposed area with tarpaulin or soil erosion control mat, as well as to carry out slope reinstatement works as soon as practicable.
- 5.23 The environmental conditions of the site will be continuously reviewed by the Resident Site Staff, IEC and the Environmental Team through regular and ad hoc site

- inspections and monitoring exercises.
- 5.24 No warning and summon or notification of successful prosecution was received in the reporting month.
- 5.25 There were a total of 55 environmental complaints, 13 warnings, 3 summons and 2 successful prosecutions received since the commencement of the Project.
- 5.26 The Complaint Log is attached in Appendix L and the summary of warnings issued by the EPD and prosecution is attached in Appendix M.

6. FUTURE KEY ISSUES

Key Issues for the Coming Month

6.1 Key issues to be considered in the coming month include:

- Runoff from exposed slope;
- Wastewater and runoff discharge from site;
- Regular removal of silt, mud and sand along u-channels, culverts and gullies;
- Review and implementation of temporary drainage system for the surface runoff;
- Proper storage of construction materials near streams;
- Noise from operation of the equipment, especially for rock-breaking activities and machinery on-site;
- Dust generation from stockpiles of dusty materials, exposed retain wall, excavation works and rock breaking activities;
- Storage of chemicals/fuel and chemical waste/waste oil on site;
- Watering for rock breaking activity, soil nailing and on haul road;
- Accumulation of general and construction waste near stream and on site;
- Proper sorting and segregation of C&D materials in designated areas; and
- Provide wheel washing facilities at the site entrance/exit.

Monitoring Schedule for the Next Month

6.2 The tentative monitoring schedule for the next month is given in Appendix C.

Construction Program for the Project (Construction Program for the Next Month)

6.3 The major construction activities in the coming month include:

Northern Section

- Installation of street furniture at Zone A to F;
- Construction of baffle wall and stepped channel; and
- Reinstatement works of the footpath.

Southern Section

- Reinstatement works of footpath at Zone 1 to 3; and
- Street furniture installation at Zone 1 to 3.

7. CONCLUSIONS AND RECOMMENDATIONS

Conclusions

- 7.1 Air quality, noise and water quality monitoring works were performed in the reporting month and all monitoring results were checked and reviewed.
- 7.2 24-hour TSP monitoring was conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded in the reporting month.
- 7.3 Construction noise monitoring was conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded in the reporting month.
- 7.4 Water quality monitoring was conducted as scheduled in the reporting month.
- 7.5 No valid Action/Limit Level exceedance for water quality was recorded in the reporting month.
- 7.6 A total of 1 environmental complaint was received in the reporting month.
- 7.7 No warning and summon and notification of successful prosecution was received in the reporting month.

Recommendations

- 7.8 According to the environmental audit performed in the reporting month, the following recommendations were made:

Dust Impact

- To implement dust suppression measures on all haul roads, stockpiles and dry surfaces in dry weather.
- To implement dust control measures for the dust generation work such as cement mixing, soil nailing, excavation, piling works and rock breaking.
- To ensure water spray being applied for the dust emissive works, such as soil nail installation, loading and unloading of soil materials, excavation works and rock dowel installation.
- To cover soil stockpiles and exposed slope surface by impervious tarpaulin sheets or other means.
- To ensure that all vehicles carrying dusty material are properly covered before leaving the site.
- To maintain the machinery and vehicles in a good working condition on site.

Noise Impact

- To implement appropriate mitigation measures, such as cover the tip of the hammer,

in order to minimize the noise emitted during rock-breaking activities.

- To review the works sequence of site activities so as to reduce the number of noisy equipment in concurrent operation.
- To follow up any exceedance caused by the construction works.
- To employ quiet powered mechanical equipment if possible.
- To ensure compliance of CNP conditions during restricted-hour works.
- To space out noisy equipment and position as far away as possible from sensitive receivers.


Water Quality Impact

- To prevent any surface runoff discharge into any stream course.
- To avoid accumulation of stagnant and ponding water on site.
- To clear the silt and sediment in the sedimentation tanks.
- To ensure properly maintenance for de-silting facilities.
- To divert all the water generated from construction site to de-silting facilities with enough handling capacity before discharge.
- To review the capacity of de-silting facilities for discharge.
- To review and implement temporary drainage system.
- To identify any wastewater discharges from site.
- To follow up any exceedance caused by the construction works.


Waste / Chemical Management

- To ensure no sediment and debris in the drainage system (U-Channel, culvert, gullies and underground channel) after the rainstorm.
- To avoid any discharge or accidental spillage of chemical waste directly from the site.
- To remove ponding water regularly in drip trays on site.
- To carry out inspection of dump truck at site exit to ensure inert and non-inert C&D materials are properly segregated before removing off site.
- To ensure proper collection and disposal of rubbish generated on site.
- To avoid storage of oil container within the Country Park.
- To ensure the performance of sorting of C&D materials at source (during generation).
- To avoid storage of construction materials at any stream.
- To check for any accumulation of waste materials or rubbish on site.
- To sort and segregate C&D materials in designated areas properly.


FIGURES

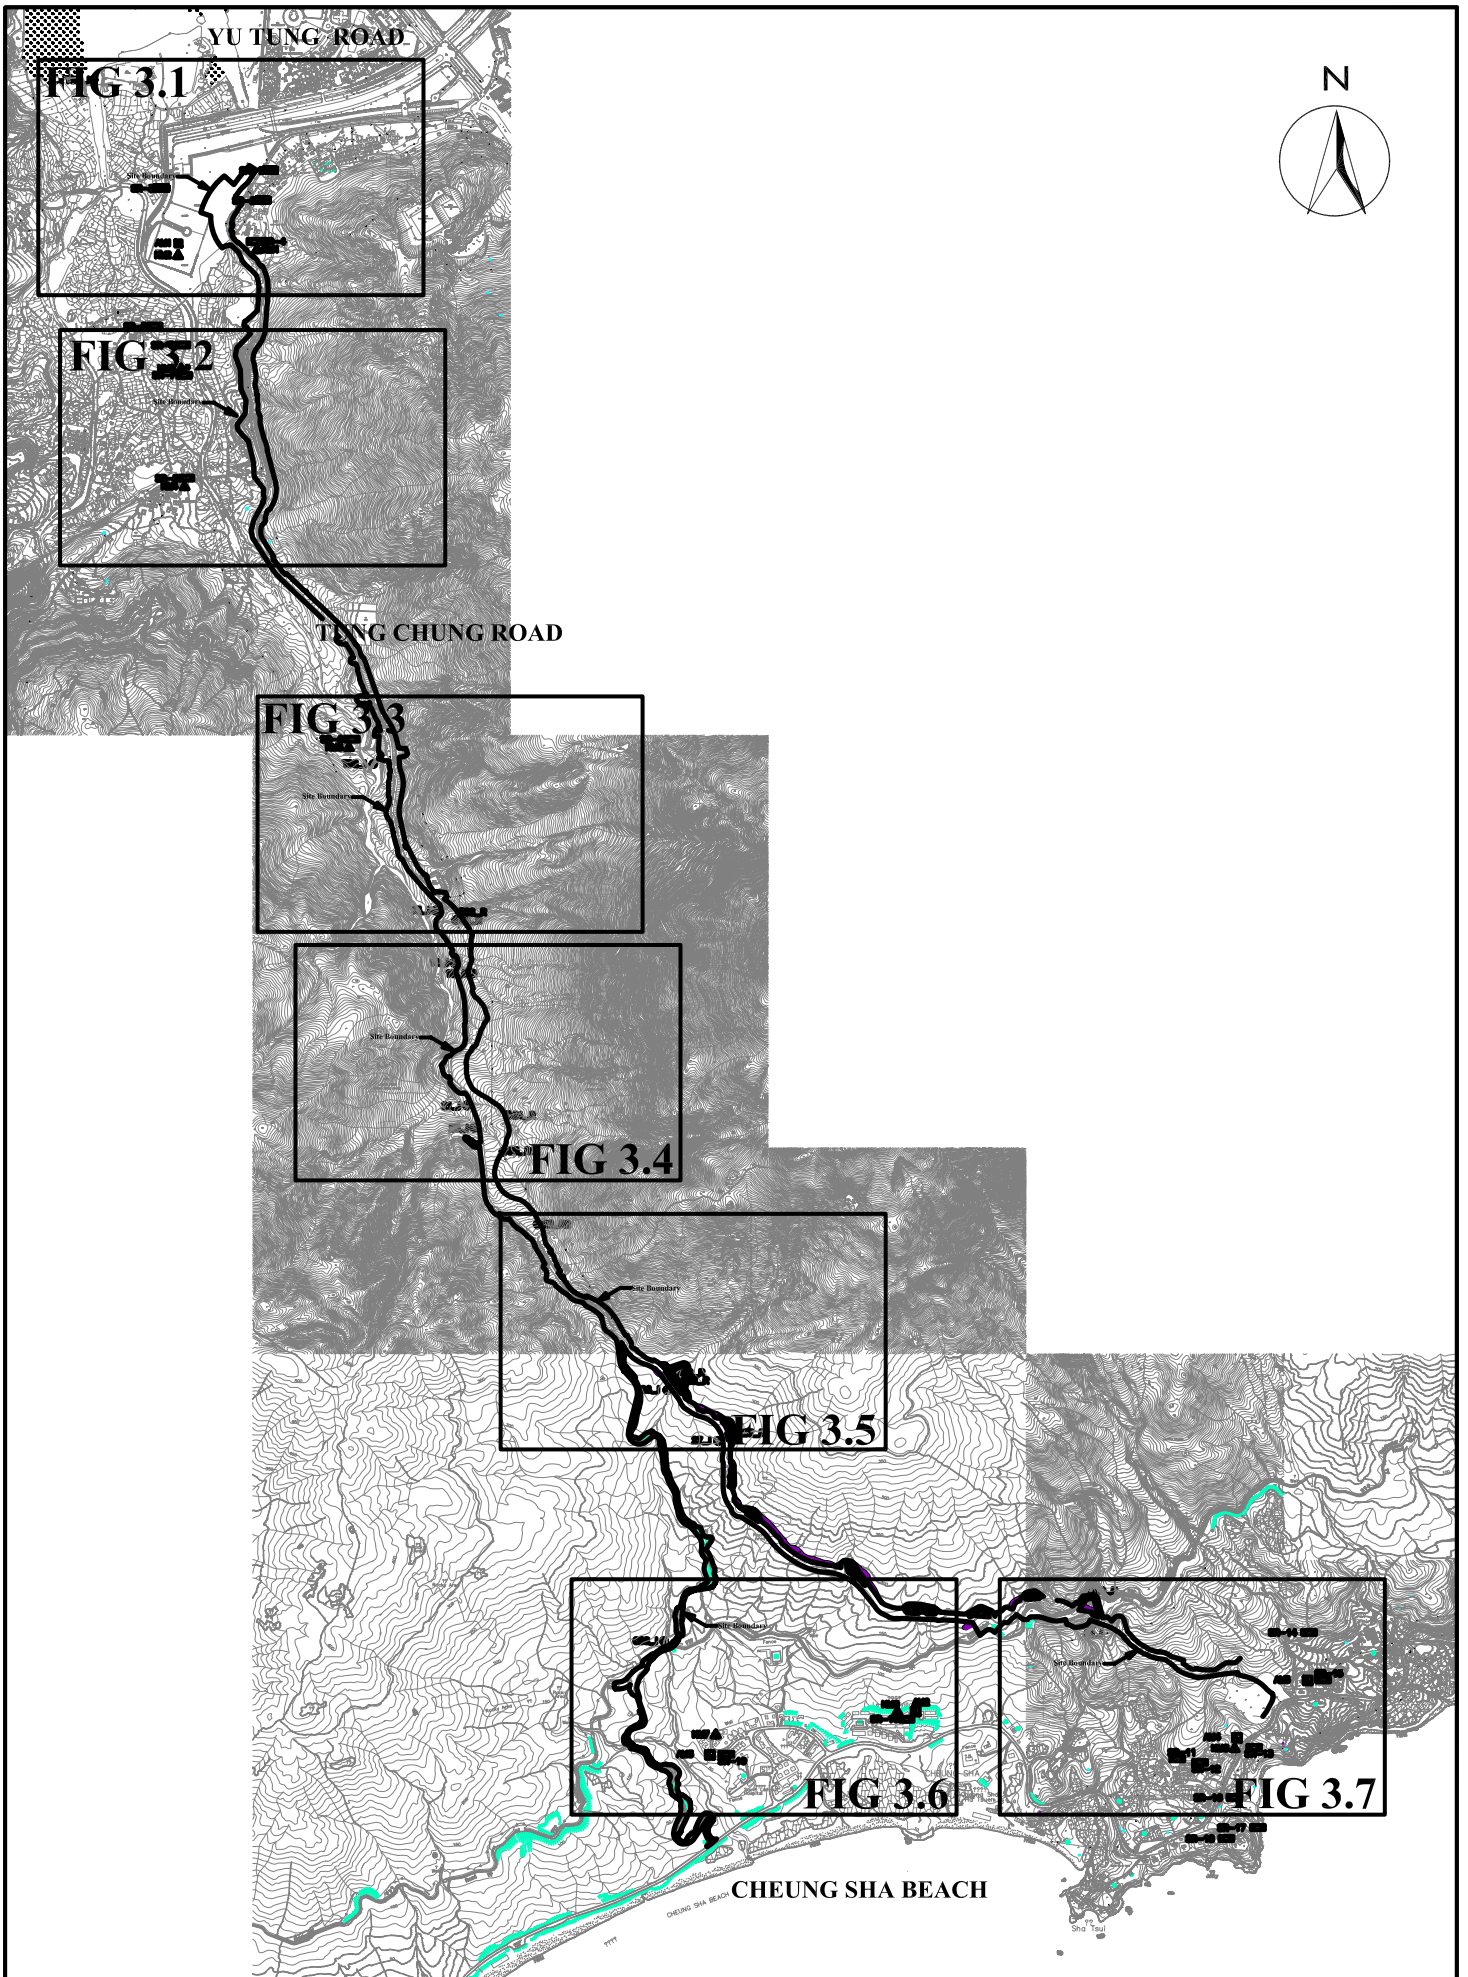



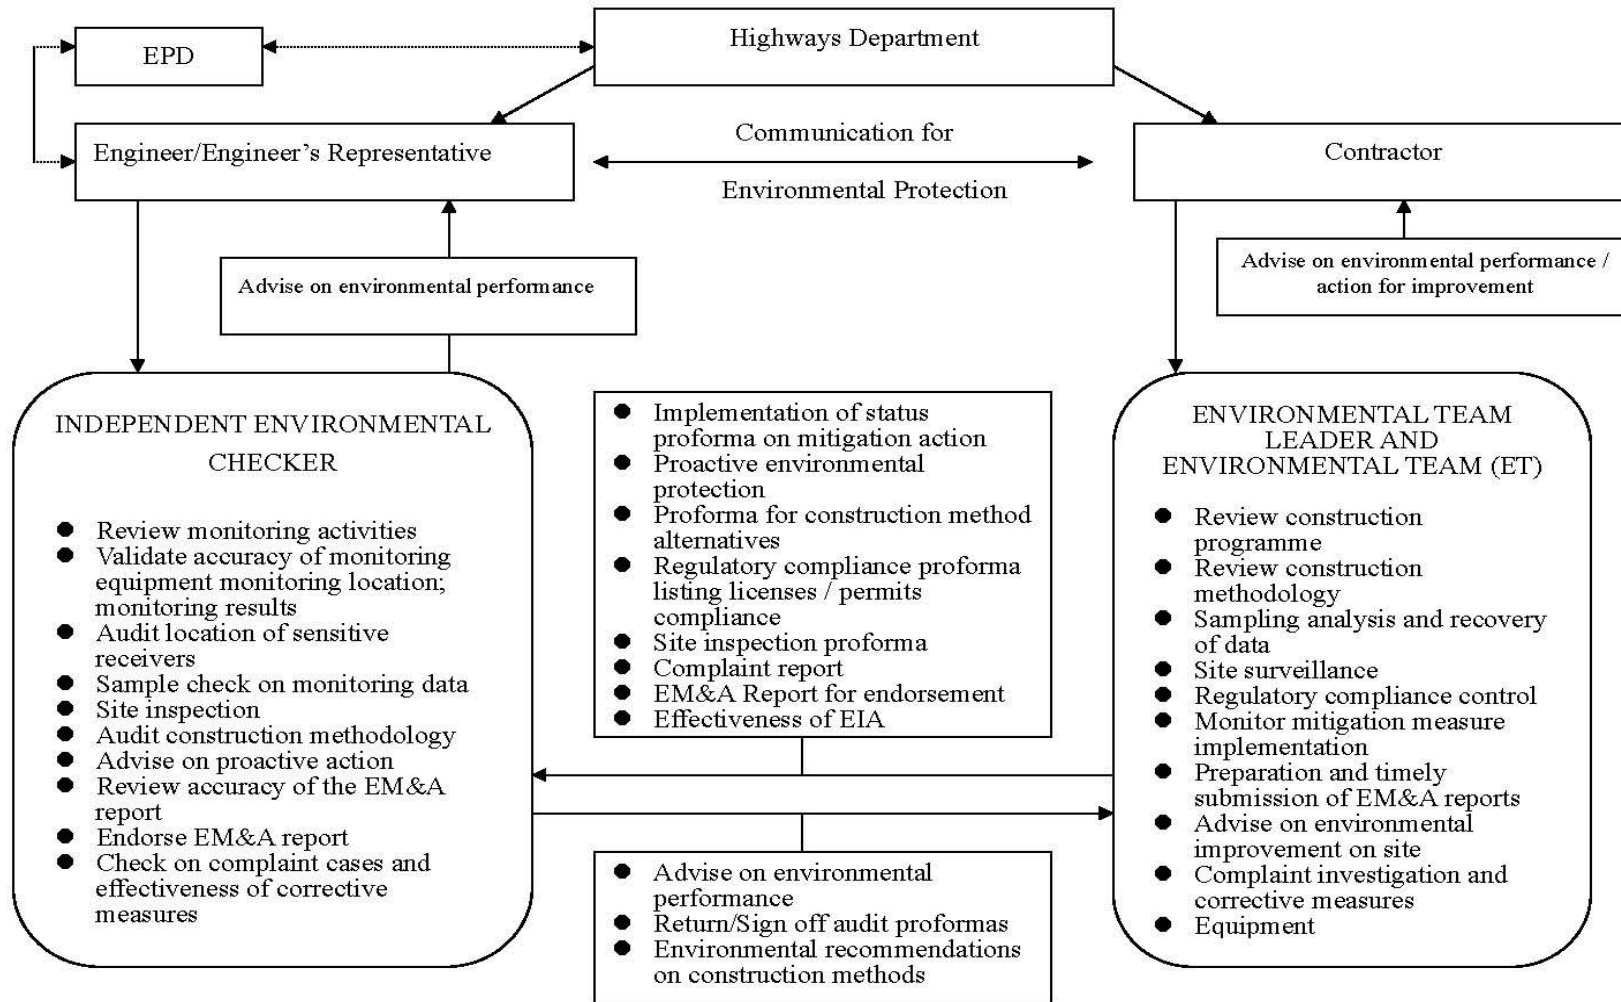

SCALE	N.T.S.	DATE	OCT 2006
CHECK	JY	DRAWN	VL
JOB No.	MA6030	DRAWING No.	FIG 1
		REV	—

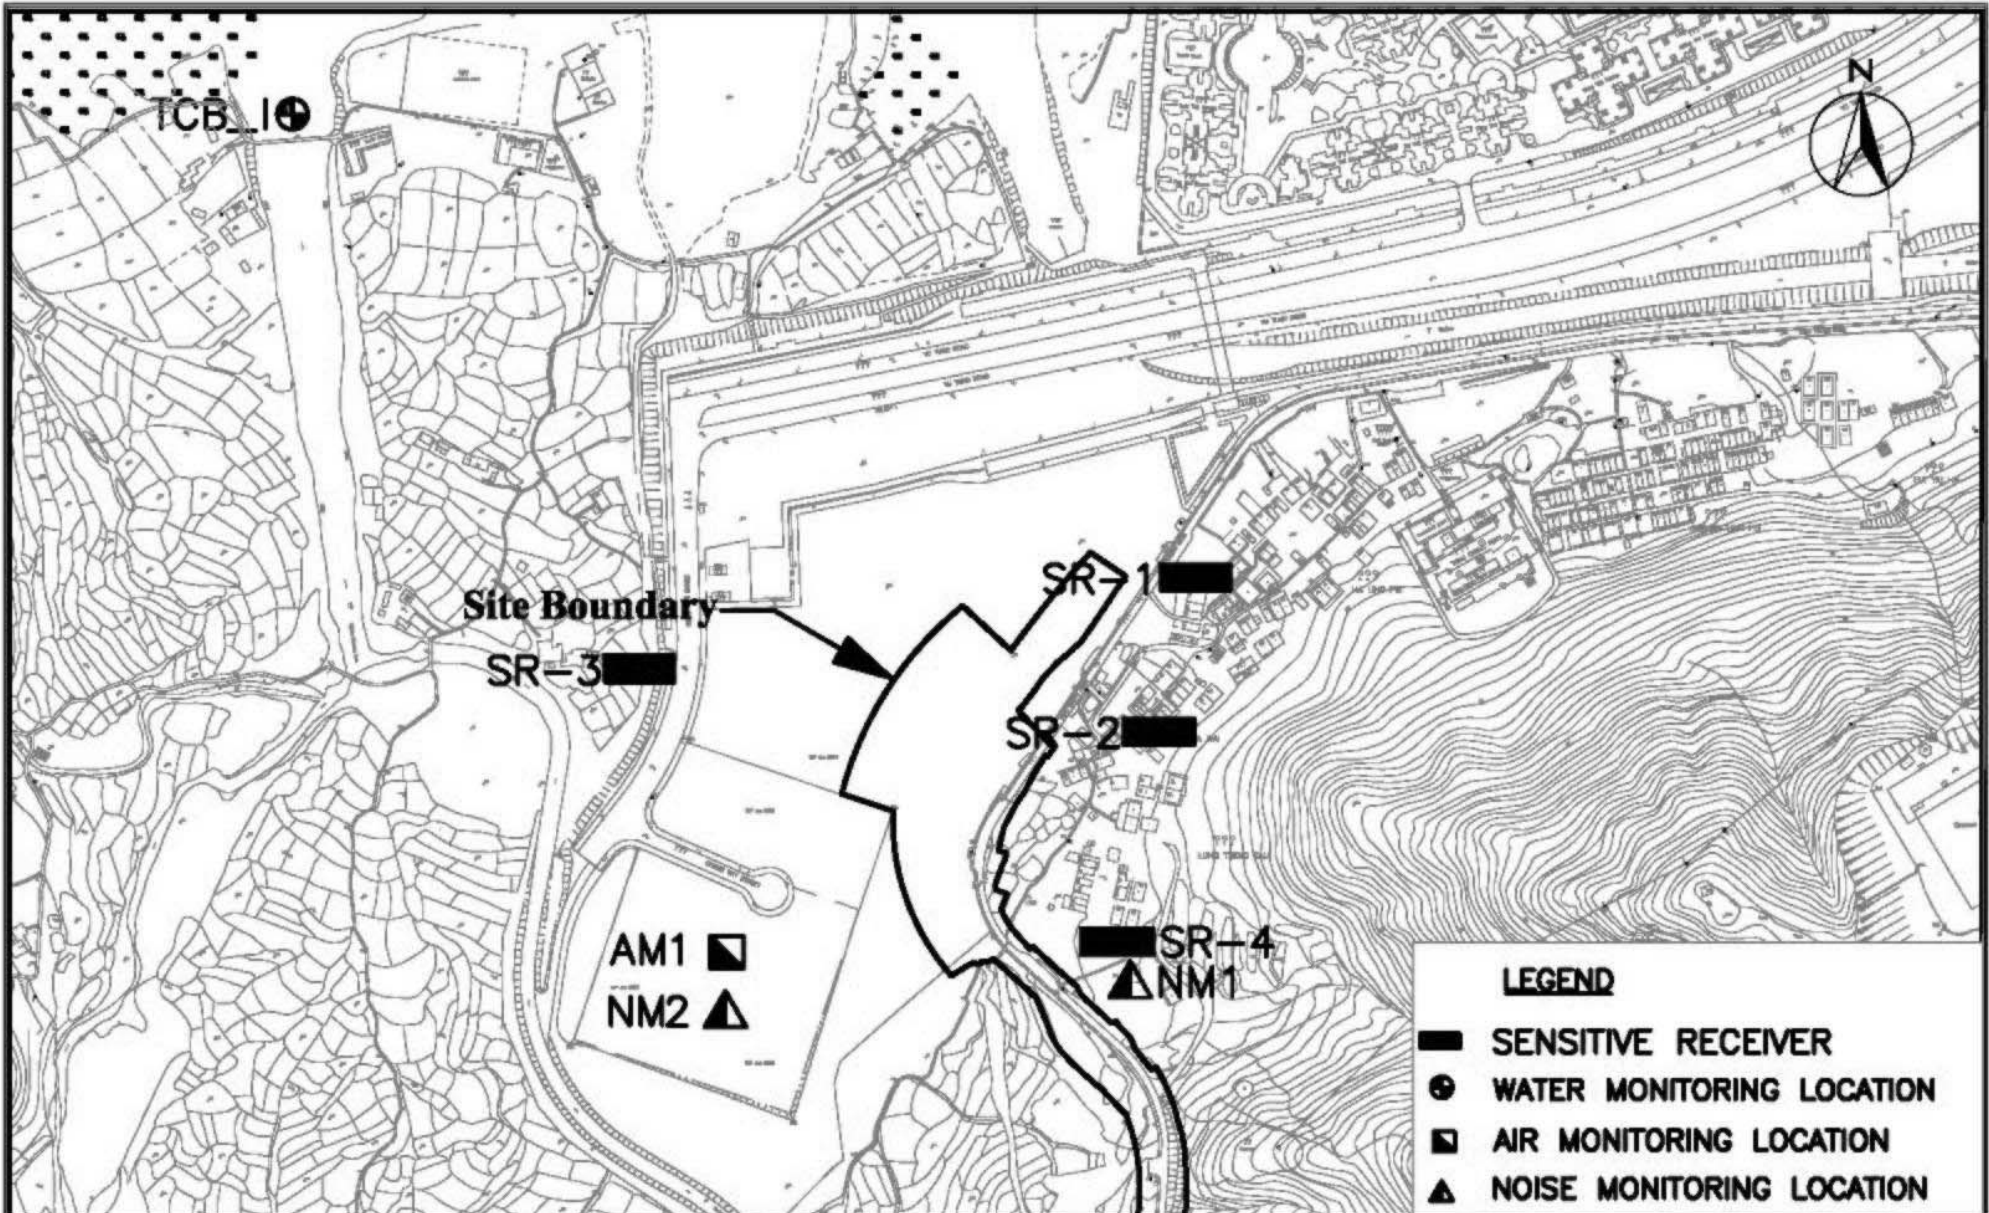

SCALE	N.T.S.	DATE	2007
CHECK	KL	DRAWN	FL
JOB NO.	MA6030	DRAWING No.	2
		Rev	1




LEGEND	
	SENSITIVE RECEIVER
	WATER MONITORING LOCATION
	AIR MONITORING LOCATION
	NOISE MONITORING LOCATION





IMPROVEMENT TO TUNG CHUNG ROAD BETWEEN LUNG TSENG TAU AND CHEUNG SHA

**MONITORING LOCATIONS
(SHEET 1 OF 7)**

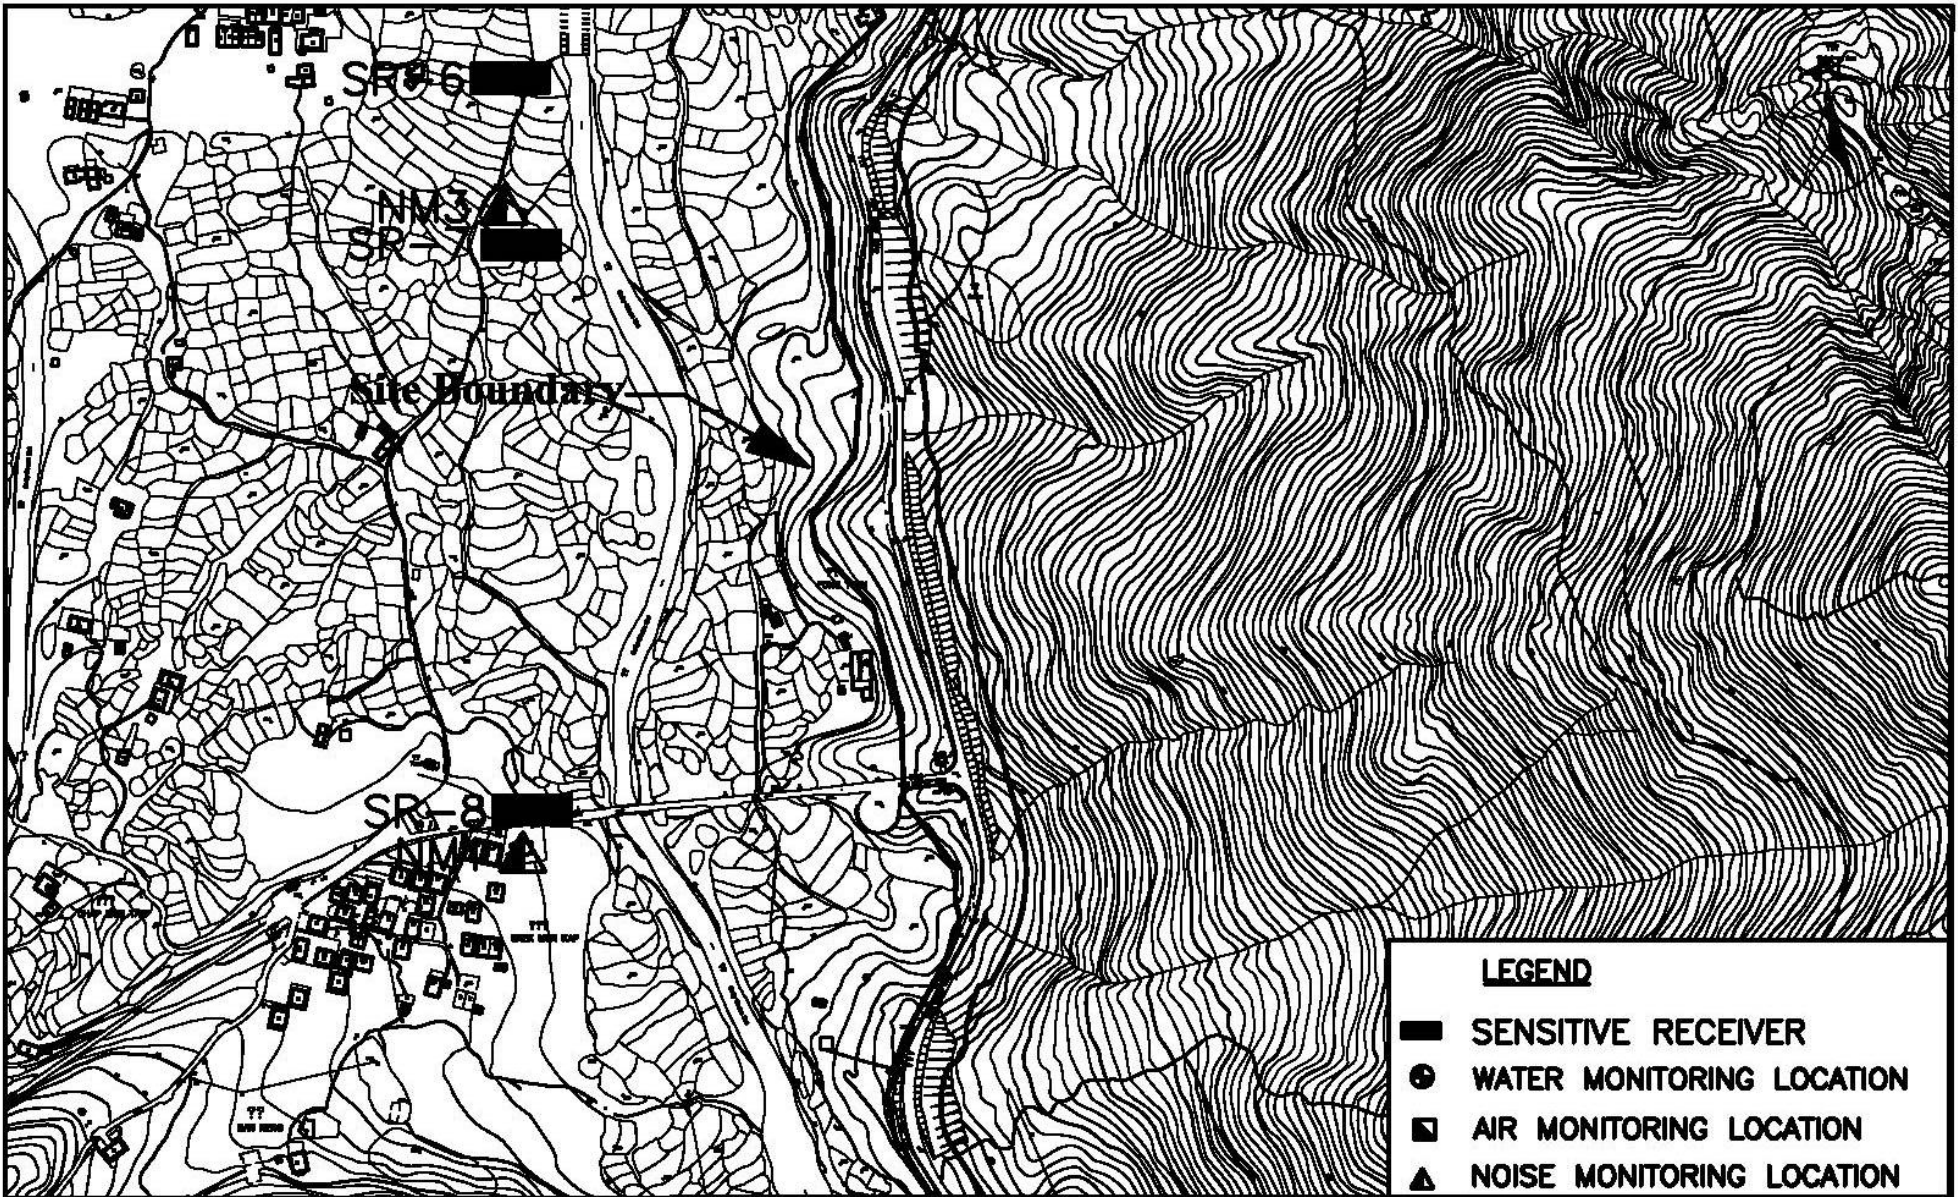

SCALE	A4 1:4000	DATE	OCT 2006
CHECK	JY	DRAWN	VL
JOB No.	MA6030	DRAWING No.	FIG 3.1
		REV	1




LEGEND	
	SENSITIVE RECEIVER
	WATER MONITORING LOCATION
	AIR MONITORING LOCATION
	NOISE MONITORING LOCATION

IMPROVEMENT TO TUNG CHUNG ROAD BETWEEN LUNG TSENG TAU AND CHEUNG SHA

CNOTECH
Cinotech Consultants Limited

**MONITORING LOCATIONS
(SHEET 2 OF 7)**


SCALE	A4 1:4000	DATE	OCT 2006
CHECK	JY	DRAWN	VL
JOB No.	MA6030	DRAWING No.	FIG 3.2
		REV	1

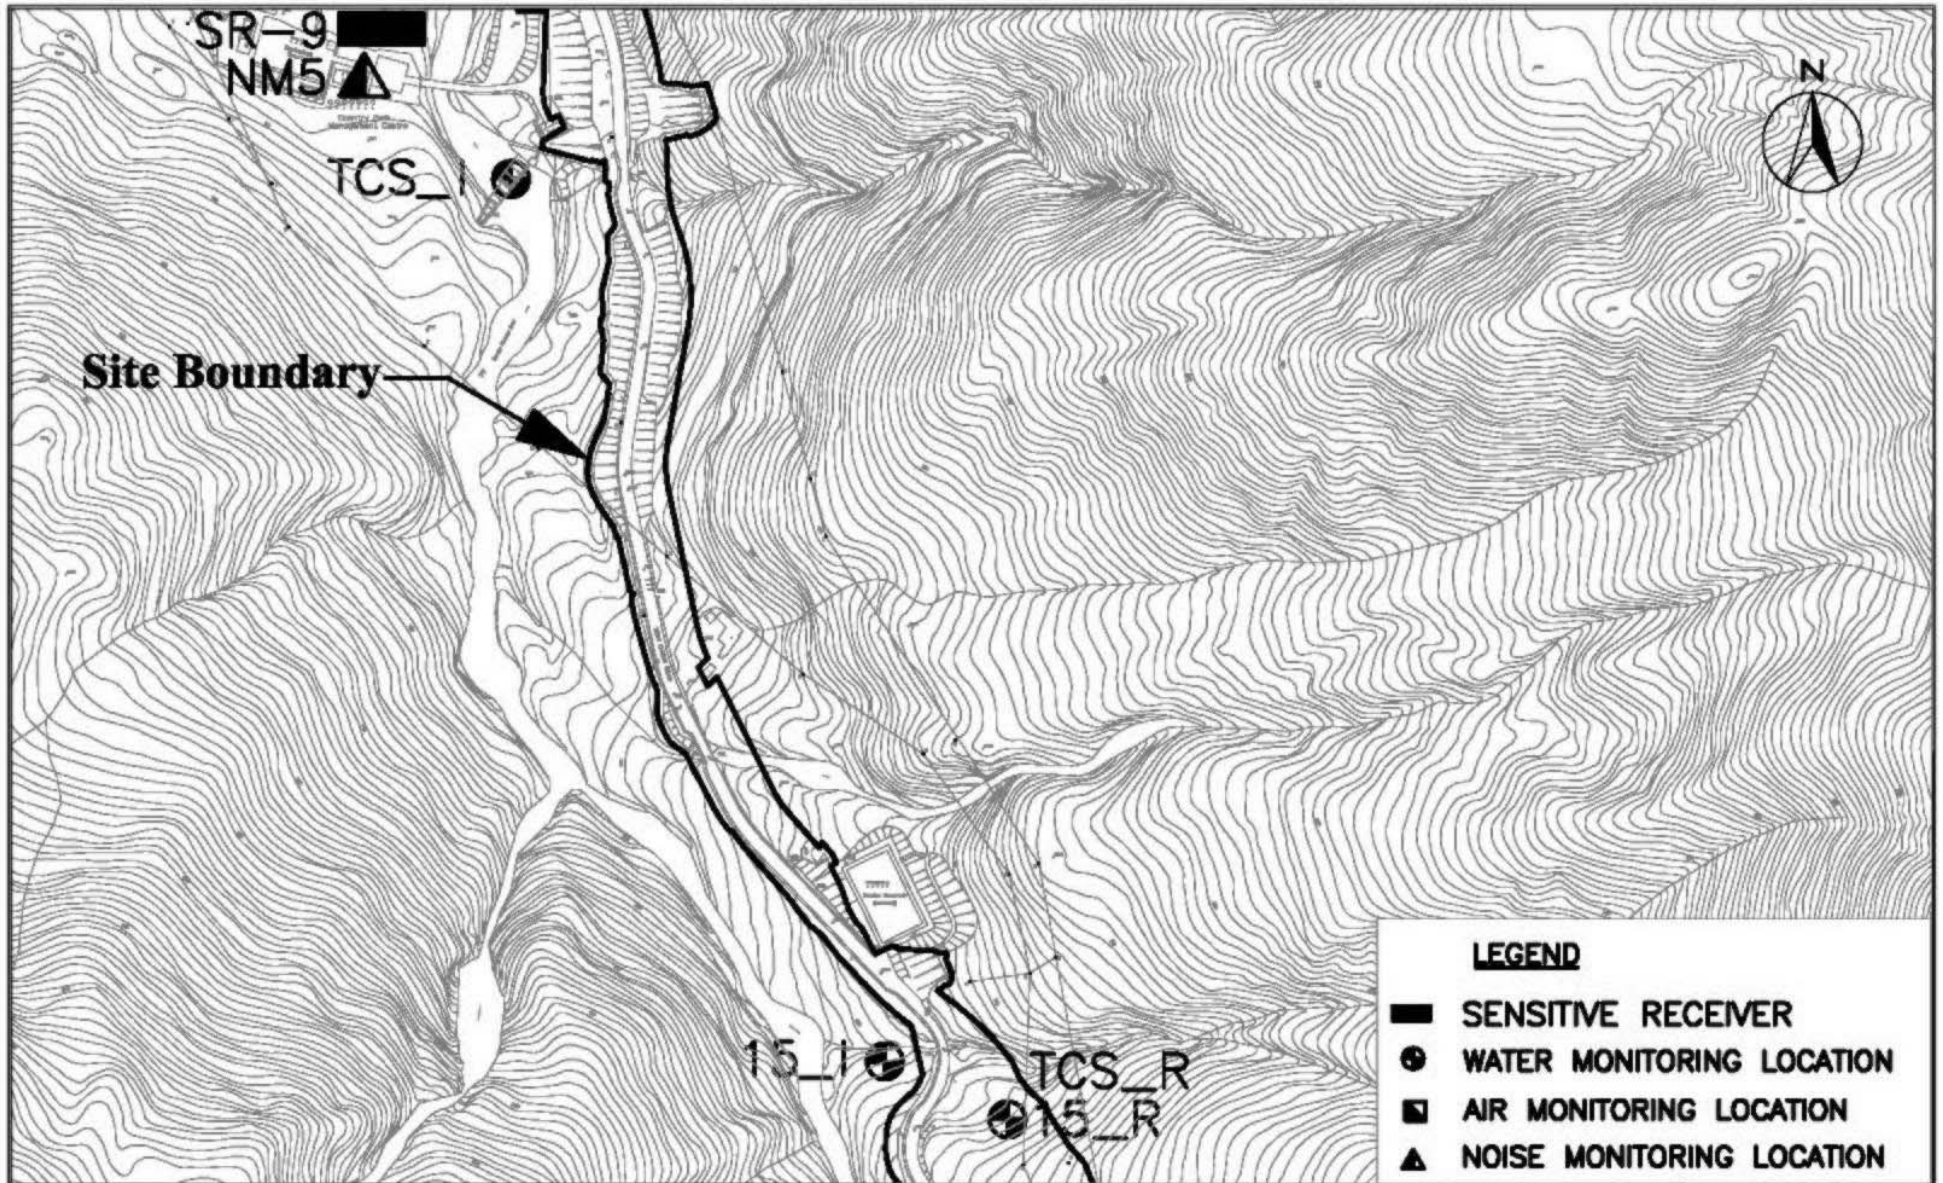

LEGEND

- SENSITIVE RECEIVER
- WATER MONITORING LOCATION
- AIR MONITORING LOCATION
- ▲ NOISE MONITORING LOCATION

 Cinotech Consultants Limited	IMPROVEMENT TO TUNG CHUNG ROAD BETWEEN LUNG TSENG TAU AND CHEUNG SHA		SCALE	A4 1:4000	DATE	OCT 2006
	MONITORING LOCATIONS (SHEET 3 OF 7)		CHECK	JY	DRAWN	VL
			JOB No.	MA6030	DRAWING No.	FIG 3.3

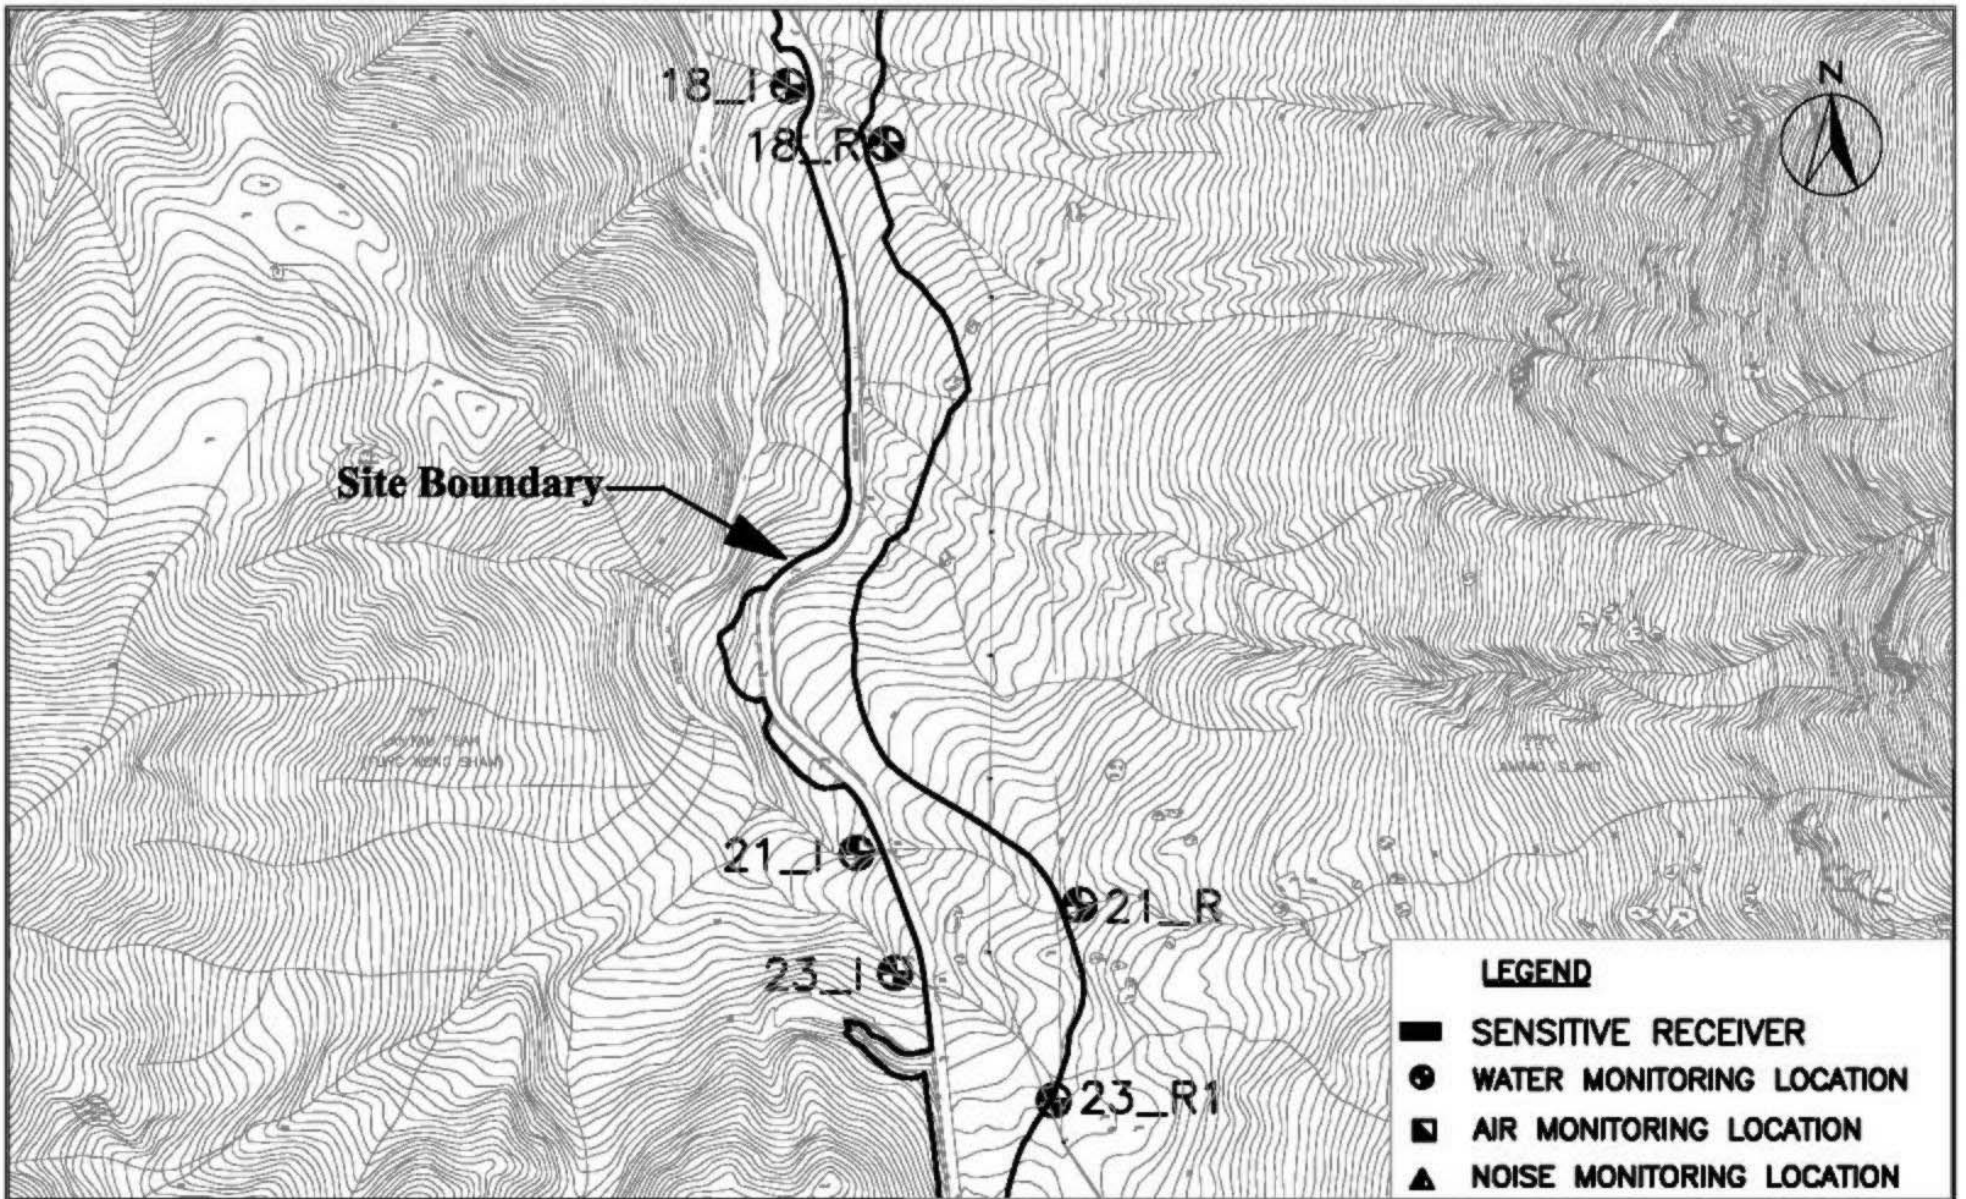

LEGEND


- SENSITIVE RECEIVER
- WATER MONITORING LOCATION
- AIR MONITORING LOCATION
- ▲ NOISE MONITORING LOCATION



IMPROVEMENT TO TUNG CHUNG ROAD BETWEEN LUNG TSENG TAU AND CHEUNG SHA

**MONITORING LOCATIONS
(SHEET 4 OF 7)**

SCALE	A4 1:4000	DATE	OCT 2006
CHECK	JY	DRAWN	VL
JOB No.	MA6030	DRAWING No.	FIG 3.4
		REV	1

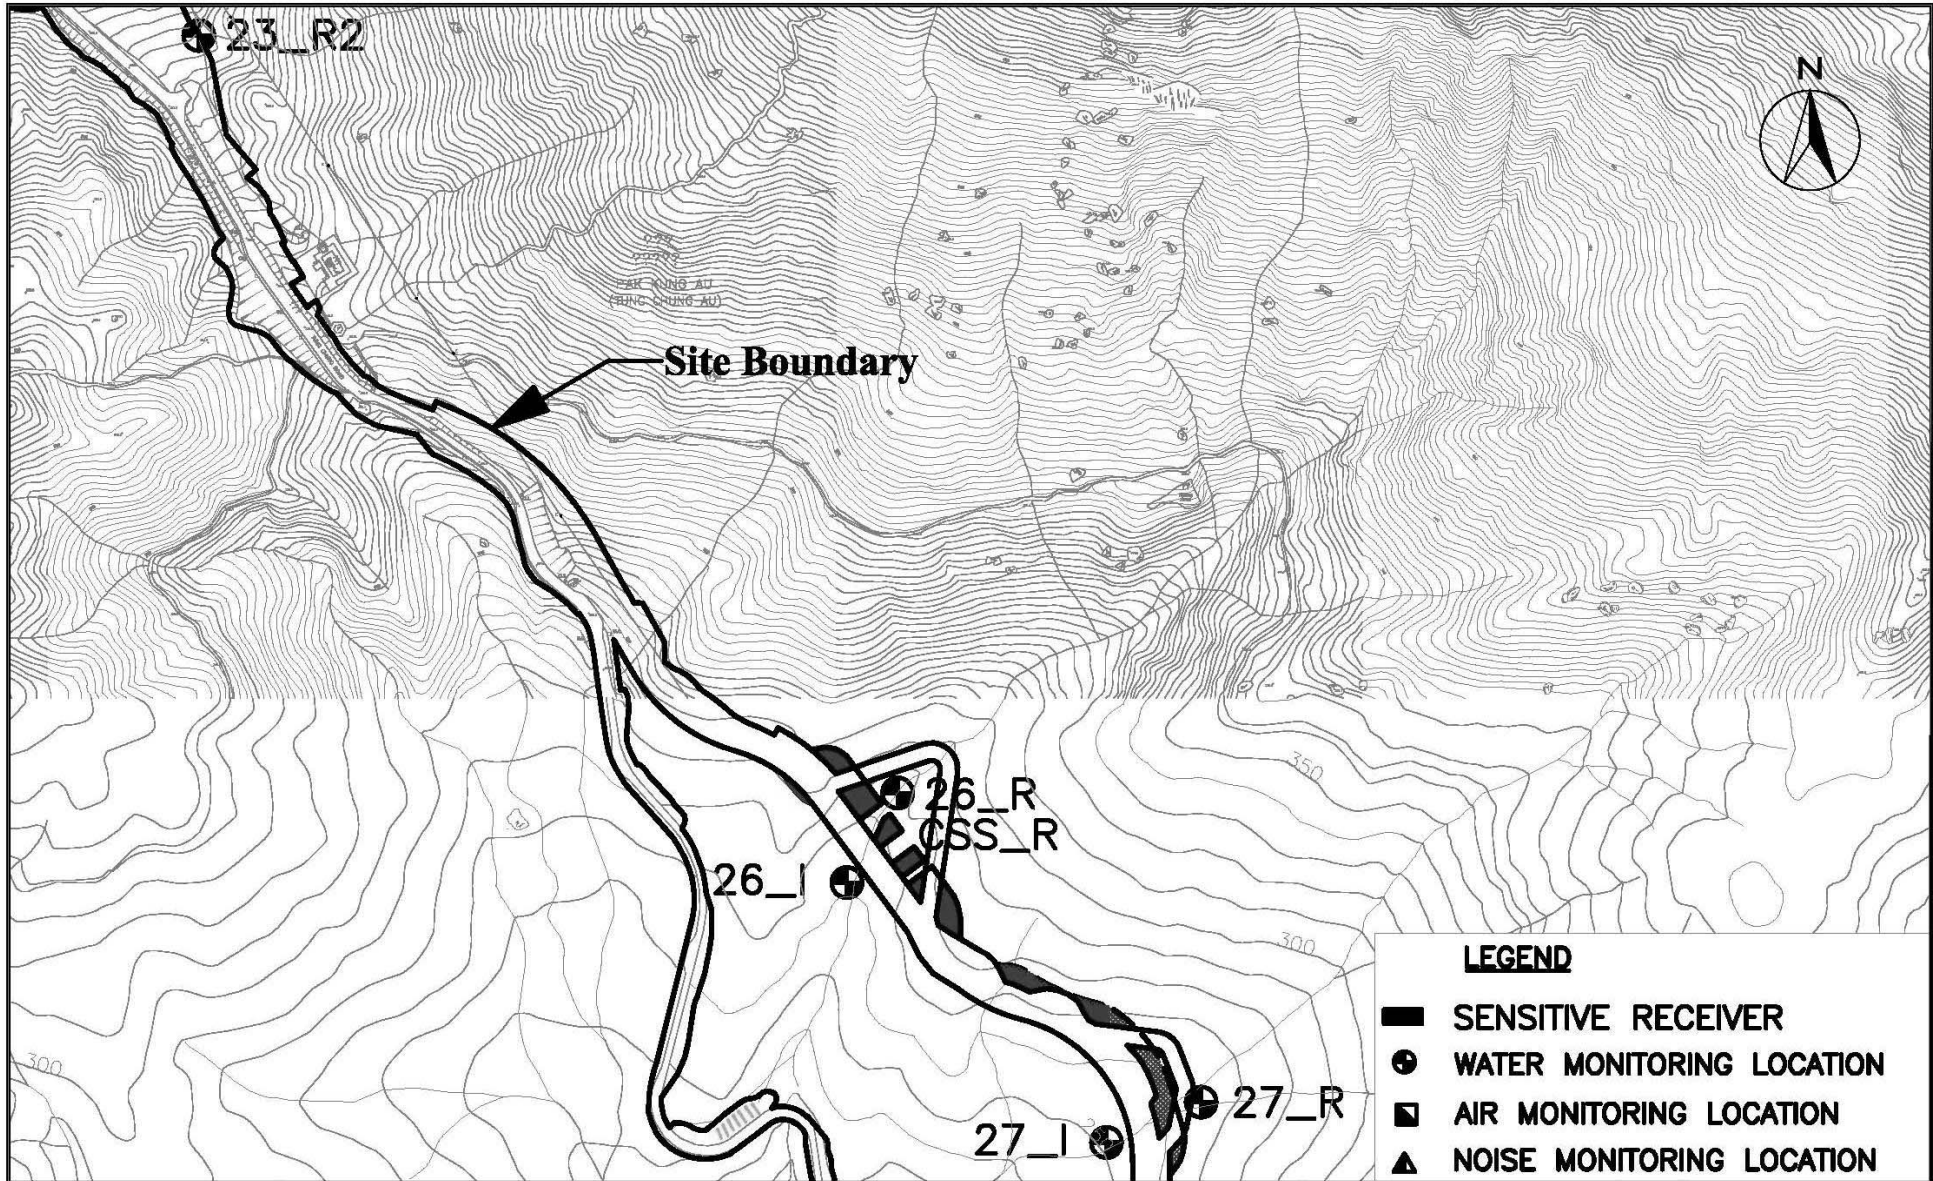


IMPROVEMENT TO TUNG CHUNG ROAD BETWEEN LUNG TSENG TAU AND CHEUNG SHA



**MONITORING LOCATIONS
(SHEET 5 OF 7)**


SCALE	A4 1:4000	DATE	OCT 2006
CHECK	JY	DRAWN	VL
JOB No.	MA6030	DRAWING No.	FIG 3.5
		REV	1

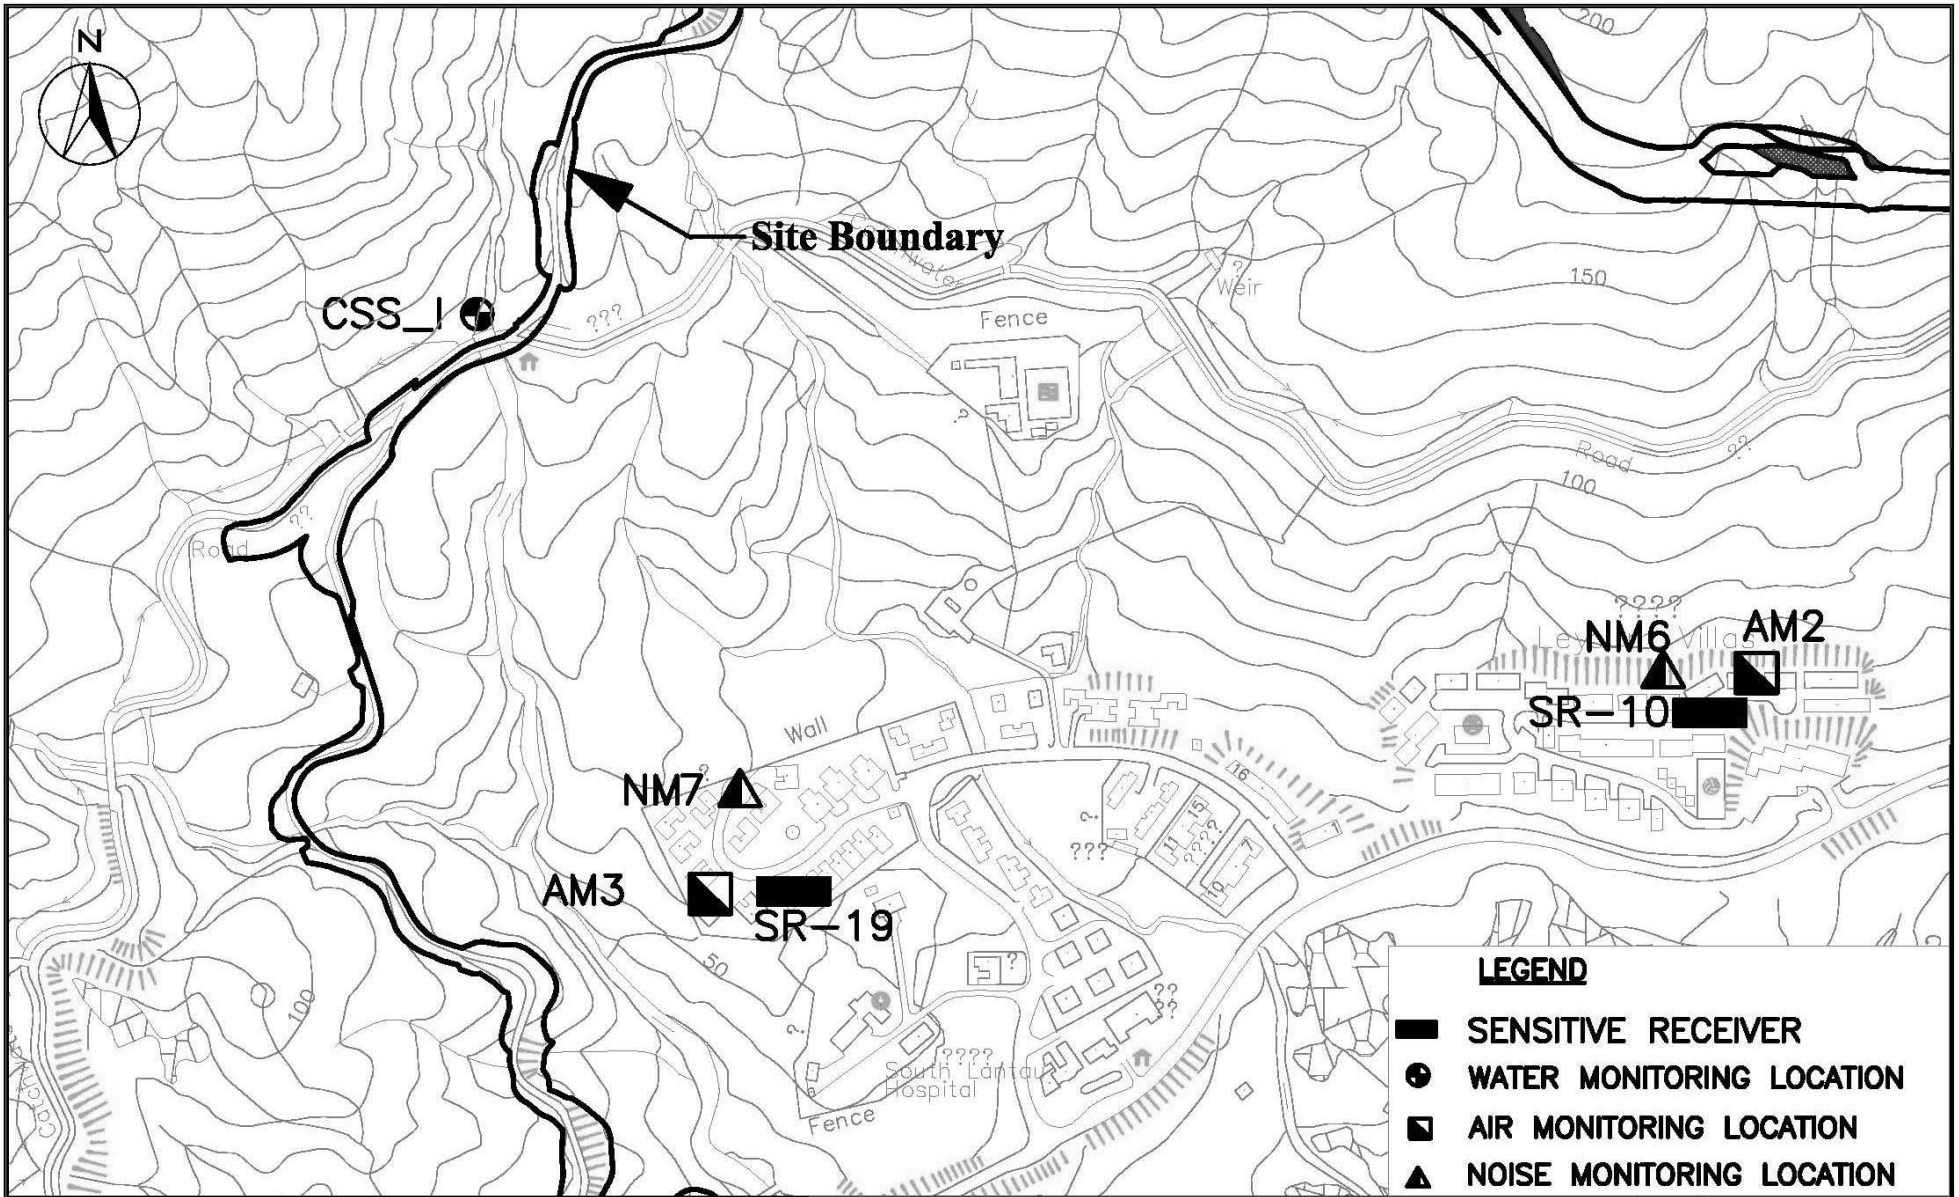

LEGEND	
	SENSITIVE RECEIVER
	WATER MONITORING LOCATION
	AIR MONITORING LOCATION
	NOISE MONITORING LOCATION

 Cinotech Consultants Limited	IMPROVEMENT TO TUNG CHUNG ROAD BETWEEN LUNG TSENG TAU AND CHEUNG SHA	
	MONITORING LOCATIONS (SHEET 6 OF 7)	

SCALE	A4 1:4000	DATE	OCT 2006
CHECK	JY	DRAWN	VL
JOB No.	MA6030	DRAWING No.	FIG 3.6
		REV	1

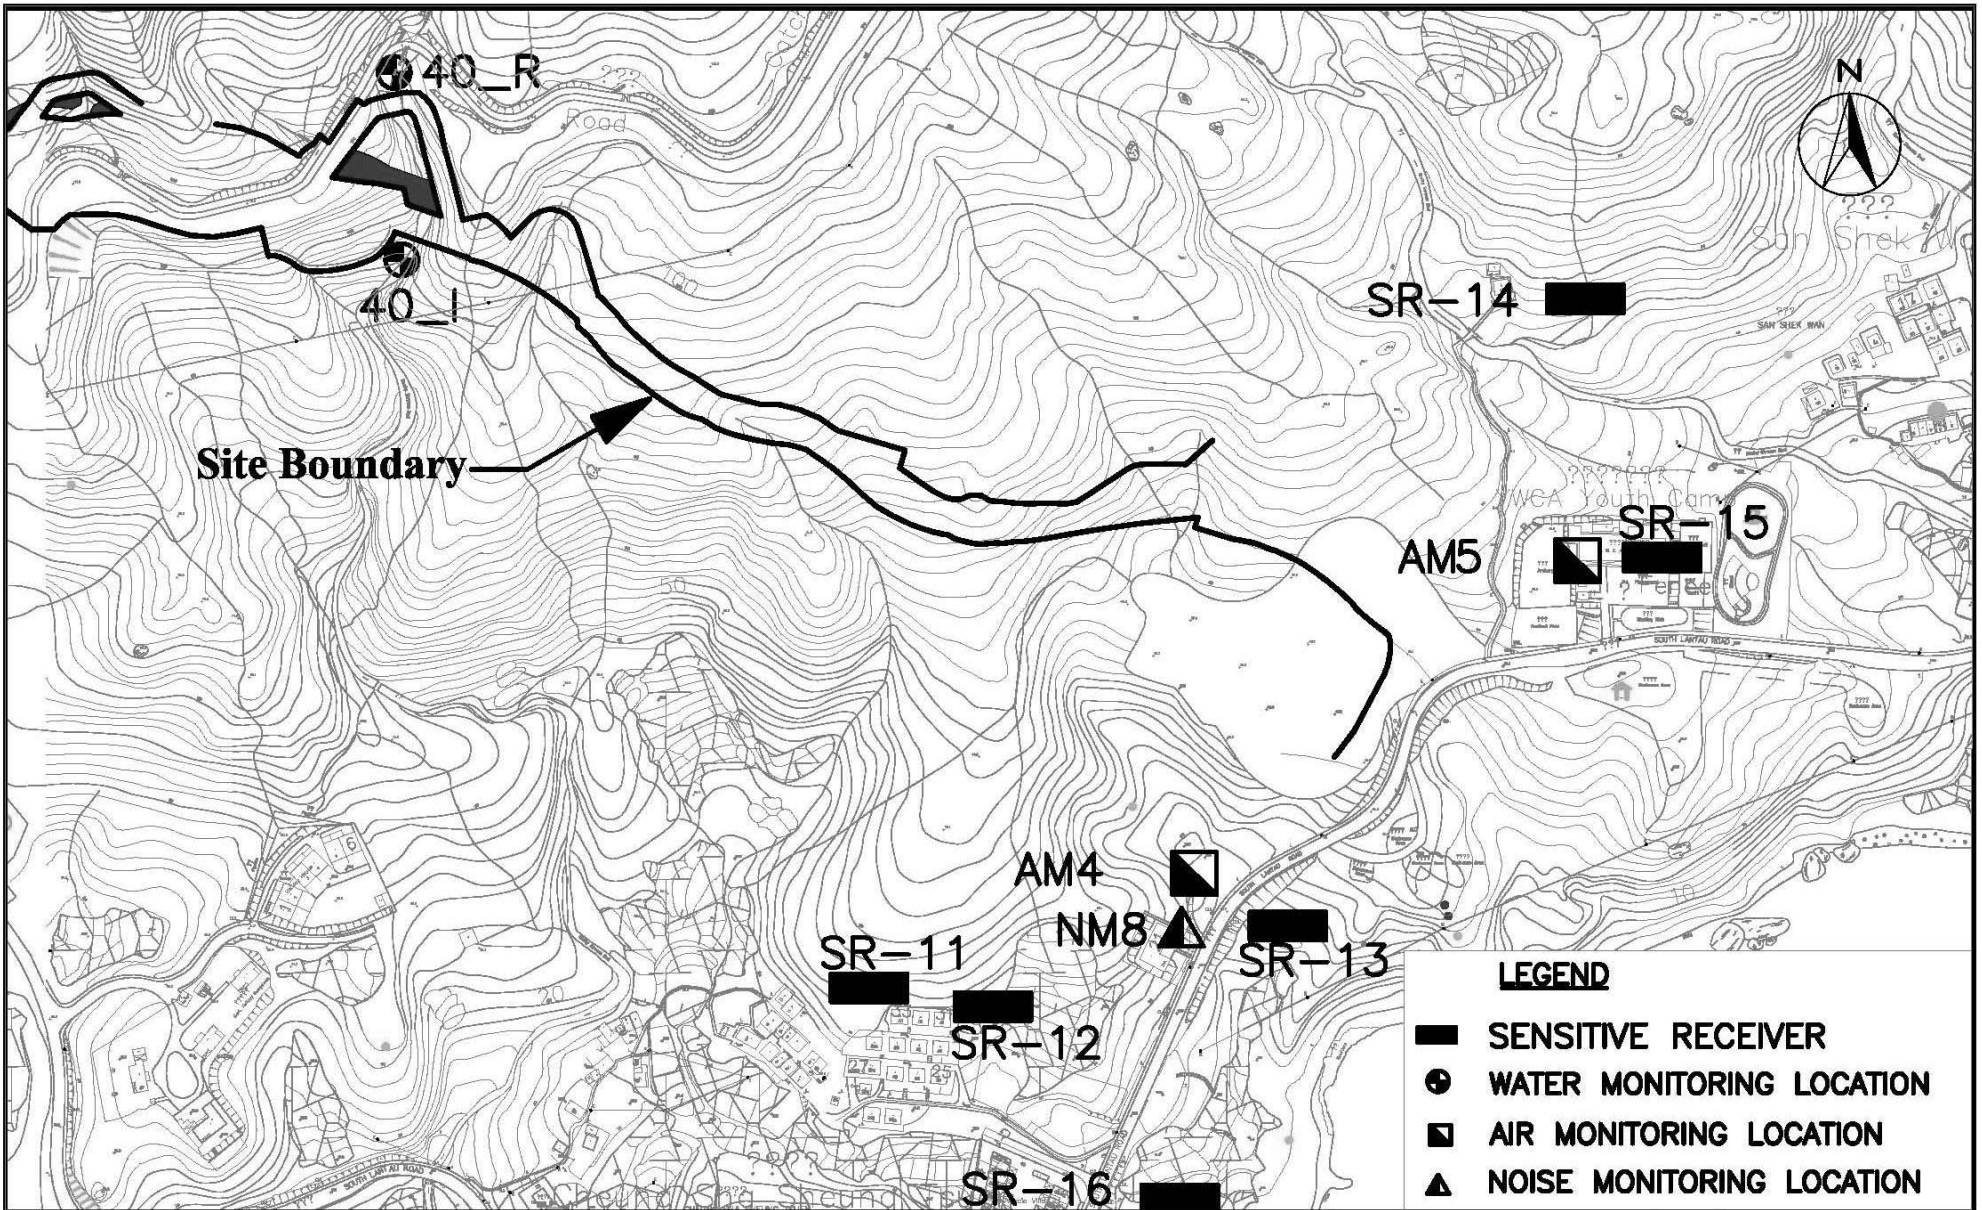

IMPROVEMENT TO TUNG CHUNG ROAD BETWEEN LUNG TSENG TAU AND CHEUNG SHA



**MONITORING LOCATIONS
(SHEET 7 OF 7)**

SCALE	A4 1:4000	DATE	OCT 2006
CHECK	JY	DRAWN	VL
JOB No.	MA6030	DRAWING No.	FIG 3.7
		REV	1

**APPENDIX A
ACTION AND LIMIT LEVELS FOR AIR
QUALITY, NOISE AND WATER
QUALITY**

Appendix A - Action and Limit Levels

Table A-1 Action and Limit Levels for 1-Hour TSP

Location	Action Level, $\mu\text{g}/\text{m}^3$	Limit Level, $\mu\text{g}/\text{m}^3$
AM1	312	500
AM2	328	
AM3	302	
AM4	305	
AM5	342	

Table A-2 Action and Limit Levels for 24-Hour TSP

Location	Action Level, $\mu\text{g}/\text{m}^3$	Limit Level, $\mu\text{g}/\text{m}^3$
AM1	155	260
AM2	151	
AM3	141	
AM4	145	
AM5	153	

Table A-3 Action and Limit Levels for Construction Noise

Period	Action Level ⁽²⁾	Limit Level	
		0700-1900 hrs on normal weekdays	When one documented complaint is received
1900-2300 hrs on holidays & 0700-2300 hrs on all other days	- ⁽¹⁾		
2300-0700 hrs of next day	- ⁽¹⁾		

*Free field noise levels were adjusted with a correction of +3 dB(A)

Notes:

- (1) The noise limits shall be determined by EPD during the application of the construction noise permit (CNP).
- (2) Stated in the *“Environmental Monitoring and Audit Guidelines for Development Projects in Hong Kong”*, Appendix D2, Section 2.6, Table 2.1

Table A-4 Compliance Level for Water Quality

Monitoring Stations	DO, mg/L		pH		Turbidity, NTU				SS, mg/L			
	Action	Limit	Action	Limit	Action		Limit		Action		Limit	
TCS_I	6.10	4.00	-	<6.5 or >8.5	5.95	or 120% of the upstream control station's Tby (at the sme tide on the same day if appropriate)	13.30	or 130% of the upstream control station's Tby (at the sme tide on the same day if appropriate)	10.30	or 120% of the upstream control station's SS (at the sme tide on the same day if appropriate)	12.00	or 130% of the upstream control station's SS (at the sme tide on the same day if appropriate)
CSS_I	6.40	4.00	-	<6.5 or >8.5	7.91		10.50		9.90		16.00	
15_I	5.94	4.00	-	<6.5 or >8.5	11.00		16.10		6.10		8.20	
18_I	6.43	4.00	-	<6.5 or >8.5	6.84		11.10		14.00		16.00	
19_I	6.55	4.00	-	<6.5 or >8.5	7.52		9.03		14.00		18.00	
21_I	6.73	4.00	-	<6.5 or >8.5	7.70		8.30		6.60		20.00	
23_I	6.55	4.00	-	<6.5 or >8.5	6.37		6.62		8.50		17.00	
26_I	6.49	4.00	-	<6.5 or >8.5	7.53		8.10		6.70		15.00	
27_I	5.33	4.00	-	<6.5 or >8.5	6.05		6.76		2.10		3.00	
32_I	5.94	4.00	-	<6.5 or >8.5	10.30		14.20		15.00		18.00	
40_I	6.42	4.00	-	<6.5 or >8.5	9.38		10.60		14.00		15.00	
TCB_I	6.31	4.00	-	<6.5 or >8.5	17.10		41.40		19.00		20.00	

**APPENDIX B
COPIES OF CALIBRATION
CERTIFICATES**

High-Volume TSP Sampler 5-POINT CALIBRATION DATA SHEET

CINOTECH

File No. MA6030/46/0016

Station AM1 - YMCA of HK Christian College

Operator: CH

Date: 6-Apr-09

Next Due Date: 5-Jun-09

Equipment No.: A-01-46

Serial No. 1315

Ambient Condition			
Temperature, Ta (K)	290.5	Pressure, Pa (mmHg)	764.6

Orifice Transfer Standard Information					
Equipment No.:	A-04-06	Slope, mc	0.0575	Intercept, bc	0.0395
Last Calibration Date:	6-Mar-09	$mc \times Qstd + bc = [\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$			
Next Calibration Date:	5-Mar-10	$Qstd = \{[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2} - bc\} / mc$			

Calibration of TSP Sampler					
Calibration Point	Orifice			HVS	
	ΔH (orifice), in. of water	$[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$	Qstd (CFM) X - axis	ΔW (HVS), in. of oil	$[\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$ Y-axis
1	12.2	3.55	61.02	8.6	2.98
2	10.8	3.34	57.37	7.1	2.71
3	7.6	2.80	48.02	5.0	2.27
4	5.3	2.34	39.99	3.3	1.85
5	3.2	1.82	30.92	2.1	1.47

By Linear Regression of Y on X

Slope, mw = 0.0495

Intercept, bw : -0.0964

Correlation coefficient* = 0.9976

*If Correlation Coefficient < 0.990, check and recalibrate.

Set Point Calculation

From the TSP Field Calibration Curve, take Qstd = 43 CFM

From the Regression Equation, the "Y" value according to

$$mw \times Qstd + bw = [\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$$

Therefore, Set Point; W = $(mw \times Qstd + bw)^2 \times (760 / Pa) \times (Ta / 298) =$ 4.01

Remarks: _____

Conducted by: TAD CHUN MAN Signature: _____

Date: 6/4/09

Checked by: CH Signature: _____

Date: 6 April 2009

High-Volume TSP Sampler 5-POINT CALIBRATION DATA SHEET

CINOTECH

File No. MA6030/46/0017

Station AM1 - YMCA of HK Christian College Operator: CH
 Date: 5-Jun-09 Next Due Date: 4-Aug-09
 Equipment No.: A-01-46 Serial No. 1315

Ambient Condition			
Temperature, Ta (K)	303	Pressure, Pa (mmHg)	754.4

Orifice Transfer Standard Information					
Equipment No.:	A-04-06	Slope, mc	0.0575	Intercept, bc	0.0395
Last Calibration Date:	6-Mar-09	$mc \times Qstd + bc = [\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$			
Next Calibration Date:	5-Mar-10	$Qstd = \{[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2} - bc\} / mc$			

Calibration of TSP Sampler					
Calibration Point	Orifice			HVS	
	ΔH (orifice), in. of water	$[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$	Qstd (CFM) X - axis	ΔW (HVS), in. of oil	$[\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$ Y-axis
1	12.5	3.49	60.07	8.7	2.91
2	10.6	3.22	55.26	7.2	2.65
3	7.4	2.69	46.06	5.1	2.23
4	5.2	2.25	38.50	3.0	1.71
5	3.3	1.79	30.53	1.9	1.36

By Linear Regression of Y on X
 Slope, mw = 0.0533 Intercept, bw = -0.2820
 Correlation coefficient* = 0.9978
 *If Correlation Coefficient < 0.990, check and recalibrate.

Set Point Calculation

From the TSP Field Calibration Curve, take Qstd = 43 CFM
 From the Regression Equation, the "Y" value according to

$$mw \times Qstd + bw = [\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$$

Therefore, Set Point; W = $(mw \times Qstd + bw)^2 \times (760 / Pa) \times (Ta / 298) =$ 4.14

Remarks: _____

Conducted by: TED CHUNG Signature: _____
 Checked by: CH Signature: _____

Date: 5/6/09
 Date: 5 June 2009

High-Volume TSP Sampler 5-POINT CALIBRATION DATA SHEET

CINOTECH

File No. MA6030/AM4/0016

Station No. 31 South Lantau Road (AM4) Operator: CH
 Date: 6-Apr-09 Next Due Date: 5-Jun-09
 Equipment No.: A-01-06 Serial No. 10576

Ambient Condition			
Temperature, Ta (K)	290.5	Pressure, Pa (mmHg)	764.6

Orifice Transfer Standard Information					
Equipment No.:	A-04-06	Slope, mc	0.0575	Intercept, bc	0.0395
Last Calibration Date:	6-Mar-09	$mc \times Qstd + bc = [\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$			
Next Calibration Date:	5-Mar-10	$Qstd = \{[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2} - bc\} / mc$			

Calibration of TSP Sampler					
Calibration Point	Orifice			HVS	
	ΔH (orifice), in. of water	[ΔH x (Pa/760) x (298/Ta)] ^{1/2}	Qstd (CFM) X - axis	ΔW (HVS), in. of oil	[ΔW x (Pa/760) x (298/Ta)] ^{1/2} Y-axis
1	11.4	3.43	58.97	7.7	2.82
2	8.9	3.03	52.02	6.2	2.53
3	7.4	2.76	47.37	5.1	2.29
4	5.3	2.34	39.99	3.2	1.82
5	3.0	1.76	29.91	1.8	1.36

By Linear Regression of Y on X

Slope, mw = 0.0516 Intercept, bw = -0.1924

Correlation coefficient* = 0.9973

*If Correlation Coefficient < 0.990, check and recalibrate.

Set Point Calculation

From the TSP Field Calibration Curve, take Qstd = 43 CFM

From the Regression Equation, the "Y" value according to

$$mw \times Qstd + bw = [\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$$

Therefore, Set Point; W = $(mw \times Qstd + bw)^2 \times (760 / Pa) \times (Ta / 298) =$ 3.98

Remarks: _____

Conducted by: PO CHING HANG Signature: _____
 Checked by: CH Signature: _____

Date: 6/4/09
 Date: 6 April 2009

High-Volume TSP Sampler 5-POINT CALIBRATION DATA SHEET

CINOTECH

File No. MA6030/AM4/0017

Station No. 31 South Lantau Road (AM4) Operator: CH
 Date: 5-Jun-09 Next Due Date: 4-Aug-09
 Equipment No.: A-01-06 Serial No. 10576

Ambient Condition			
Temperature, Ta (K)	303	Pressure, Pa (mmHg)	754.4

Orifice Transfer Standard Information					
Equipment No.:	A-04-06	Slope, mc	0.0575	Intercept, bc	0.0395
Last Calibration Date:	6-Mar-09	$mc \times Qstd + bc = [\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$			
Next Calibration Date:	5-Mar-10	$Qstd = \{[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2} - bc\} / mc$			

Calibration of TSP Sampler					
Calibration Point	Orifice			HVS	
	ΔH (orifice), in. of water	[ΔH x (Pa/760) x (298/Ta)] ^{1/2}	Qstd (CFM) X - axis	ΔW (HVS), in. of oil	[ΔW x (Pa/760) x (298/Ta)] ^{1/2} Y-axis
1	12.0	3.42	58.84	8.1	2.81
2	9.8	3.09	53.11	6.7	2.56
3	7.6	2.72	46.68	5.2	2.25
4	5.4	2.30	39.24	3.3	1.79
5	3.2	1.77	30.05	1.9	1.36

By Linear Regression of Y on X

Slope, mw = 0.0514 Intercept, bw = -0.1853

Correlation coefficient* = 0.9986

*If Correlation Coefficient < 0.990, check and recalibrate.

Set Point Calculation

From the TSP Field Calibration Curve, take Qstd = 43 CFM

From the Regression Equation, the "Y" value according to

$$mw \times Qstd + bw = [\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$$

Therefore, Set Point; W = $(mw \times Qstd + bw)^2 \times (760 / Pa) \times (Ta / 298) =$ 4.19

Remarks: _____

Conducted by: Tao CHANG HANG Signature: _____
 Checked by: W Signature: _____

Date: 5/6/09
 Date: 5 June 2009

TEST REPORT

APPLICANT: Cinotech Consultants Limited
Room 1710, Technology Park,
18 On Lai Street,
Shatin, NT, Hong Kong

Test Report No.:	C/09/90430
Date of Issue:	2009-05-02
Date Received:	2009-04-30
Date Tested:	2009-04-30
Date Completed:	2009-05-01
Next Due Date:	2010-05-01

ATTN: Mr. Henry Leung

Page: 1 of 1

Certificate of Calibration

Item for calibration:

Description : RS232 Integral Vane Digital Anemometer
Manufacturer : AZ Instrument
Model No. : 451104
Serial No. : 9020746
Equipment No. : A-03-01

Test conditions:

Room Temperature : 21 degree Celsius
Relative Humidity : 67%
Pressure : 101.5 kPa

Methodology:

The anemometer has been calibrated in accordance with the documented procedures and using standard(s) and instrument(s) which are recommended by the manufacturer, or equivalent.

Results:

	Reference Set Point	Instrument Readings
Measuring Air Velocity, m/s	2.00	2.00
Temperature, °C	21.0	21.0

PREPARED AND CHECKED BY:

For and On Behalf of **WELLAB Ltd.**



PATRICK TSE

Laboratory Manager



TISCH ENVIRONMENTAL, INC.
 145 SOUTH MIAMI AVE.
 VILLAGE OF CLEVELAND, OH 45002
 513.467.9000
 877.283.7810 TOLL FREE
 513.467.9009 FAX
 WWW.TISCH-ENV.COM

AIR POLLUTION MONITORING EQUIPMENT

ORIFICE TRANSFER STANDARD CERTIFICATION WORKSHEET TE-5025A

Date - Mar 06, 2009 Roots-meter S/N 9833640 Ta (K) - 296
 Operator Tisch Orifice I.D. - 0999 Pa (mm) - 747.20

PLATE OR Run #	VOLUME START (m3)	VOLUME STOP (m3)	DIFF VOLUME (m3)	DIFF TIME (min)	METER DIFF Hg (mm)	ORFICE DIFF H2O (in.)
1	NA	NA	1.00	1.3890	3.2	2.00
2	NA	NA	1.00	0.9850	6.3	4.00
3	NA	NA	1.00	0.8810	7.8	5.00
4	NA	NA	1.00	0.8410	8.6	5.50
5	NA	NA	1.00	0.6950	12.5	8.00

DATA TABULATION

Vstd	(x axis) Qstd	(y axis)	Va	(x axis) Qa	(y axis)
0.9917	0.7139	1.4113	0.9957	0.7168	0.8874
0.9876	1.0026	1.9959	0.9916	1.0067	1.2549
0.9854	1.1185	2.2315	0.9894	1.1231	1.4030
0.9844	1.1706	2.3405	0.9884	1.1753	1.4715
0.9792	1.4090	2.8227	0.9832	1.4147	1.7747
Qstd slope (m) = 2.03154			Qa slope (m) = 1.27212		
intercept (b) = -0.03970			intercept (b) = -0.02496		
coefficient (r) = 0.99999			coefficient (r) = 0.99999		
y axis = SQRT[H2O(Pa/760)(298/Ta)]			y axis = SQRT[H2O(Ta/Pa)]		

CALCULATIONS

Vstd = Diff. Vol [(Pa-Diff. Hg)/760] (298/Ta)
 Qstd = Vstd/Time
 Va = Diff Vol [(Pa-Diff Hg)/Pa]
 Qa = Va/Time


For subsequent flow rate calculations:

Qstd = 1/m { [SQRT(H2O(Pa/760)(298/Ta))] - b }
 Qa = 1/m { [SQRT H2O(Ta/Pa)] - b }



TISCH ENVIRONMENTAL, INC.
 145 SOUTH MIAMI AVE.
 VILLAGE OF CLEVELAND, OH 45002
 513.467.9000
 877.263.7610 TOLL FREE
 513.467.9009 FAX
 WWW.TISCH-ENV.COM

AIR POLLUTION MONITORING EQUIPMENT

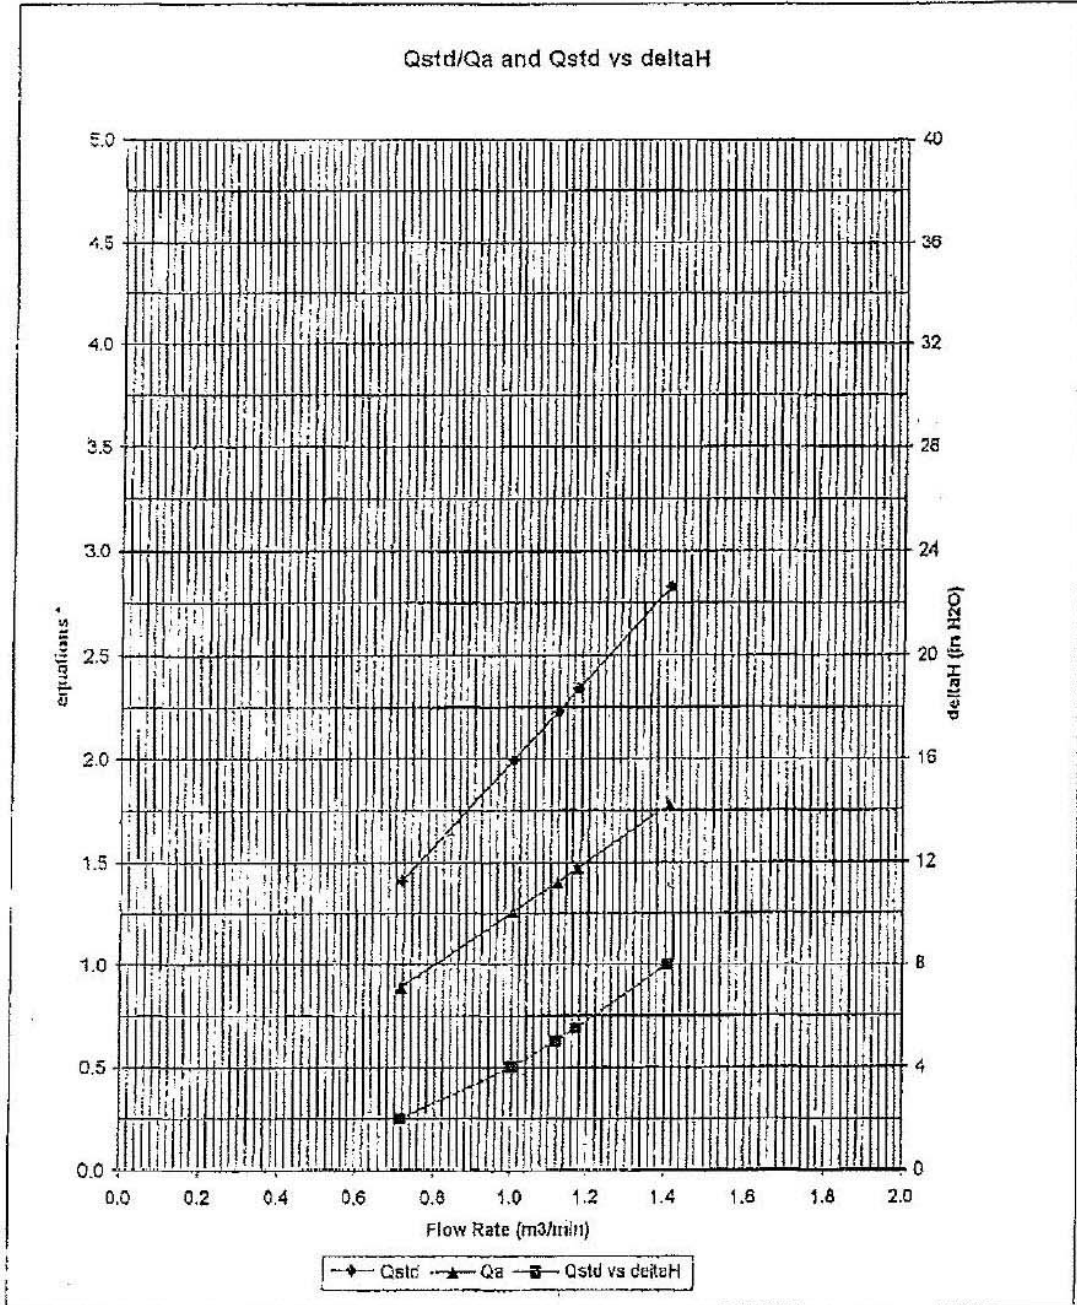

* y-axis equations:

Qstd series:
$$\sqrt{\Delta H \left(\frac{P_a}{P_{std}} \right) \left(\frac{T_{std}}{T_a} \right)}$$

Qa series:
$$\sqrt{(\Delta H (T_a / P_a))}$$

TEST REPORT

APPLICANT: Cinotech Consultants Limited
Room 1710, Technology Park,
18 On Lai Street,
Shatin, NT, Hong Kong

Test Report No.:	C/N/81215/1
Date of Issue:	2008-12-16
Date Received:	2008-12-15
Date Tested:	2008-12-15
Date Completed:	2008-12-16
Next Due Date:	2009-12-15

ATTN: Mr. Henry Leung

Page: 1 of 1

Certificate of Calibration

Item for calibration:

Description	: Integrating Sound Level Meter
Manufacturer	: Brüel & Kjær
Model No.	: B&K 2238
Serial No.	: 2337665
Microphone No.	: 2289749
Equipment No.	: N-01-01

Test conditions:

Room Temperature	: 20 degree Celsius
Relative Humidity	: 60%

Test Specifications:

Performance checking at 94 and 114 dB

Methodology:

In-house method, according to manufacturer instruction manual

Results:

Reference Set Point, dB	Instrument Readings, dB
94	94.0
114	114.0

PREPARED AND CHECKED BY:
For and On Behalf of **WELLAB Ltd.**



PATRICK TSE
Laboratory Manager

TEST REPORT

APPLICANT: **Cinotech Consultants Limited**
Room 1710, Technology Park,
18 On Lai Street,
Shatin, NT, Hong Kong

Test Report No.:	C/N/80903-1
Date of Issue:	2008-09-03
Date Received:	2008-09-02
Date Tested:	2008-09-02
Date Completed:	2008-09-03
Next Due Date:	2009-09-02

ATTN: **Mr. Henry Leung**

Page: 1 of 1

Certificate of Calibration

Item for calibration:

Description	: Integrating Sound Level Meter
Manufacturer	: Brüel & Kjær
Model No.	: B&K 2238
Serial No.	: 2359311
Microphone No.	: 2346382
Equipment No.	: N-01-03

Test conditions:

Room Temperature	: 21 degree Celsius
Relative Humidity	: 61%

Test Specifications:

Performance checking at 94 and 114 dB

Methodology:

In-house method, according to manufacturer instruction manual

Results:

Reference Set Point, dB	Instrument Readings, dB
94	94.0
114	114.0

PREPARED AND CHECKED BY:

For and On Behalf of **WELLAB Ltd.**



PATRICK TSE
Laboratory Manager

TEST REPORT

APPLICANT: Cinotech Consultants Limited
Room 1710, Technology Park,
18 On Lai Street,
Shatin, NT, Hong Kong

Test Report No.:	C/N/80903-2
Date of Issue:	2008-09-03
Date Received:	2008-09-02
Date Tested:	2008-09-02
Date Completed:	2008-09-03
Next Due Date:	2009-09-02

ATTN: Mr. Henry Leung

Page: 1 of 1

Certificate of Calibration

Item for calibration:

Description	: Integrating Sound Level Meter
Manufacturer	: Brüel & Kjær
Model No.	: B&K 2238
Serial No.	: 2359303
Equipment No.	: N-01-04

Test conditions:

Room Temperature	: 21 degree Celsius
Relative Humidity	: 61%

Test Specifications:

Performance checking at 94 and 114 dB

Methodology:

In-house method, according to manufacturer instruction manual

Results:

Reference Set Point, dB	Instrument Readings, dB
94	94.0
114	114.0

PREPARED AND CHECKED BY:

For and On Behalf of **WELLAB Ltd.**



PATRICK TSE

Laboratory Manager

TEST REPORT

APPLICANT: Cinotech Consultants Limited
Room 1710, Technology Park,
18 On Lai Street,
Shatin, NT, Hong Kong

Test Report No.:	C/N/81013/1
Date of Issue:	2007-10-15
Date Received:	2008-10-13
Date Tested:	2008-10-13
Date Completed:	2008-10-14
Next Due Date:	2009-10-14

ATTN: Mr. Henry Leung

Page: 1 of 1

Certificate of Calibration

Item for calibration:

Description	: Integrating Sound Level Meter
Manufacturer	: Brüel & Kjær
Model No.	: B&K 2238
Serial No.	: 2394976
Microphone No.	: 2407349
Equipment No.	: N-01-05

Test conditions:

Room Temperature	: 21 degree Celsius
Relative Humidity	: 60%

Test Specifications:

Performance checking at 94 and 114 dB

Methodology:

In-house method, according to manufacturer instruction manual

Results:

Reference Set Point, dB	Instrument Readings, dB
94	94.0
114	114.0

PREPARED AND CHECKED BY:

For and On Behalf of **WELLAB Ltd.**



PATRICK TSE

Laboratory Manager

TEST REPORT

APPLICANT: Cinotech Consultants Limited
Room 1710, Technology Park,
18 On Lai Street,
Shatin, NT, Hong Kong

Test Report No.:	C/N/81115/1
Date of Issue:	2008-11-15
Date Received:	2008-11-14
Date Tested:	2008-11-14
Date Completed:	2008-11-15
Next Due Date:	2009-11-14

ATTN: Mr. Henry Leung

Page: 1 of 1

Item for calibration:

Description	: Acoustical Calibrator
Manufacturer	: Brüel & Kjær
Model No.	: 4231
Serial No.	: 2326353
Project No.	: C13
Equipment No.	: N-02-01

Test conditions:

Room Temperature	: 20 degree Celsius
Relative Humidity	: 59%
Pressure	: 1015.2 hPa

Methodology:

The sound calibrator has been calibrated in accordance with the documented procedures and using standard(s) and instrument(s) which are recommended by the manufacturer, or equivalent.

Results:

Sound Pressure Level	Measured SPL	Tolerance
At 94 dB SPL	94.0	94.0 ± 0.1 dB

PREPARED AND CHECKED BY:

For and On Behalf of **WELLAB Ltd.**



PATRICK TSE

Laboratory Manager

TEST REPORT

APPLICANT: Cinotech Consultants Limited
Room 1710, Technology Park,
18 On Lai Street,
Shatin, NT, Hong Kong

Test Report No.:	C/06/90305
Date of Issue:	2009-03-05
Date Received:	2009-03-04
Date Tested:	2009-03-04
Date Completed:	2009-03-05
Next Due Date:	2010-03-04

ATTN: Mr. Henry Leung

Page: 1 of 1

Item for calibration:

Description	: Acoustical Calibrator
Manufacturer	: Brüel & Kjær
Model No.	: 4231
Serial No.	: 2343007
Project No.	: C13
Equipment No.	: N-02-02

Test conditions:

Room Temperature	: 20 degree Celsius
Relative Humidity	: 65%
Pressure	: 1020.1hPa

Methodology:

The sound calibrator has been calibrated in accordance with the documented procedures and using standard(s) and instrument(s) which are recommended by the manufacturer, or equivalent.

Results:

Sound Pressure Level	Measured SPL	Tolerance
At 94 dB SPL	94.0	94.0 ± 0.2 dB

PREPARED AND CHECKED BY:

For and On Behalf of **WELLAB Ltd.**



PATRICK TSE
Laboratory Manager

TEST REPORT

APPLICANT: Cinotech Consultants Limited
Room 1710, Technology Park,
18 On Lai Street,
Shatin, NT, Hong Kong

Test Report No.:	C/N/80903-3
Date of Issue:	2008-09-03
Date Received:	2008-09-02
Date Tested:	2008-09-02
Date Completed:	2008-09-03
Next Due Date:	2009-09-02

ATTN: Mr. Henry Leung

Page: 1 of 1

Item for calibration:

Description	: Acoustical Calibrator
Manufacturer	: Brüel & Kjær
Model No.	: 4231
Serial No.	: 2412367
Equipment No.	: N-02-03

Test conditions:

Room Temperature	: 21 degree Celsius
Relative Humidity	: 61%

Methodology:

The Sound Level Calibrator has been calibrated in accordance with the documented procedures and using standard(s) and instrument(s) which are recommended by the manufacturer, or equivalent.

Results:

Sound Pressure Level (1kHz)	Measured SPL	Tolerance
At 94 dB SPL	94.0	94.0 ± 0.1 dB
At 114 dB SPL	114.0	114.0 ± 0.1 dB

PREPARED AND CHECKED BY:

For and On Behalf of **WELLAB Ltd.**



PATRICK TSE
Laboratory Manager

TEST REPORT

APPLICANT: Cinotech Consultants Limited
Room 1710, Technology Park,
18 On Lai Street,
Shatin, NT, Hong Kong

Test Report No.:	C/W/90430-1
Date of Issue:	2009-05-04
Date Received:	2009-04-30
Date Tested:	2009-04-30
Date Completed:	2009-04-30
Next Due Date:	2009-08-03

ATTN: Mr. Henry Leung

Page: 1 of 2

Certificate of Calibration

Item for calibration:

Description	: Sonde Environmental Monitoring System
Manufacturer	: YSI
Model No.	: 6820-C-M
Serial No.	: 02D0126AA
Equipment No.	: W.03.01
Project No.	: C013

Test conditions:

Room Temperature	: 23 degree Celsius
Relative Humidity	: 63%

Test Specifications:

Conductivity & Salinity Sensor, Model: 6560, S/N: 05A1209

1. Conductivity performance check with Potassium Chloride standard solution
2. Salinity performance check with Sodium Chloride standard solution

Dissolved Oxygen Sensor, Model: 6562, S/N: 04A0145

1. Performance check against Winkler titration

Turbidity Sensor, Model: 6136, S/N: 05A1610AJ

1. Calibration check with Formazin standard solution

pH Meter, Model: 6561, S/N: 01J

1. Calibration check with standard pH buffer

Depth Meter

1. Calibration check at 1m water level depth

Methodologies:

1. YSI 6-Series Sonde Environmental Monitoring System Instruction Manual
2. In-house method with reference to APHA and ISO standards

PREPARED AND CHECKED BY:

For and On Behalf of **WELLAB Ltd.**



PATRICK TSE

Laboratory Manager

TEST REPORT

Test Report No.:	C/W/90430-1
Date of Issue:	2009-05-04
Date Received:	2009-04-30
Date Tested:	2009-04-30
Date Completed:	2009-04-30
Next Due Date:	2009-08-03

Page: 2 of 2

Results:

1. Conductivity performance check

Specific Conductivity, $\mu\text{S}/\text{cm}$		Correction, $\mu\text{S}/\text{cm}$	Acceptable range
Salinity Meter (C1)	Theoretical Value (C2)	$D = C1 - C2$	
1421	1420	2	1420 ± 20

2. Salinity Performance check

Salinity, ppt		Correction, ppt	Acceptable range
Instrument Reading	Theoretical Value		
30.0	30.0	0.0	30.0 ± 3

3. Dissolved Oxygen check

Oxygen level in water at 20°C	Dissolved Oxygen, mg O ₂ /L		Correction, mg O ₂ /L	Acceptable range
	D.O. Meter	Winkler Titration		
Saturated	9.1	9.1	0.0	± 0.2
Half-saturated	5.6	5.6	0.0	± 0.2
Zero	0.0	0.0	0.0	± 0.2

4. Turbidity check

Turbidity value in solution, NTU	Calibration Value, NTU	Correction, NTU	Acceptable range
0.00	0.00	0.00	0.00 ± 0.05
100	100	0	100 ± 5

5. pH Meter check

Test Parameters	Performance characteristic	Acceptable range
Liquid junction error ΔpH_l , pH unit	0.01	Less than 0.05
Shift on stirring ΔpH_s , pH unit	0.01	Less than 0.02
Noise ΔpH_n , pH unit	0.00	Less than 0.02

6. Depth Meter check

Instrument Reading, m	Calibration Value, m	Correction, m	Acceptable range
1.0	1.00	0.00	1.00 ± 0.05

*****END OF REPORT*****

TEST REPORT

APPLICANT: Cinotech Consultants Limited
Room 1710, Technology Park,
18 On Lai Street,
Shatin, NT, Hong Kong

Test Report No.:	C/W/90430-2
Date of Issue:	2009-05-04
Date Received:	2009-04-30
Date Tested:	2009-04-30
Date Completed:	2009-04-30
Next Due Date:	2009-08-03

ATTN: Mr. Henry Leung

Page: 1 of 2

Certificate of Calibration

Item for calibration:

Description	: Sonde Environmental Monitoring System
Manufacturer	: YSI
Model No.	: 6820-C-M
Serial No.	: 02D0293AA
Equipment No.	: W.03.02
Project No.	: C013

Test conditions:

Room Temperature	: 23 degree Celsius
Relative Humidity	: 63%

Test Specifications:

Conductivity & Salinity Sensor, Model: 6560, S/N: 02C0886

1. Conductivity performance check with Potassium Chloride standard solution
2. Salinity performance check with Sodium Chloride standard solution

Dissolved Oxygen Sensor, Model: 6562, S/N: 0261137

1. Performance check against Winkler titration

Turbidity Sensor, Model: 6136, S/N: 05F2030AQ

1. Calibration check with Formazin standard solution

pH Meter, Model: 6561, S/N: 02A

1. Calibration check with standard pH buffer

Depth Meter

1. Calibration check at 1m water level depth

Methodologies:

1. YSI 6-Series Sonde Environmental Monitoring System Instruction Manual
2. In-house method with reference to APHA and ISO standards

PREPARED AND CHECKED BY:

For and On Behalf of **WELLAB Ltd.**



PATRICK TSE

Laboratory Manager

TEST REPORT

Test Report No.:	C/W/90430-2
Date of Issue:	2009-05-04
Date Received:	2009-04-30
Date Tested:	2009-04-30
Date Completed:	2009-04-30
Next Due Date:	2009-08-03

Page: 2 of 2

Results:

1. Conductivity performance check

Specific Conductivity, $\mu\text{S}/\text{cm}$		Correction, $\mu\text{S}/\text{cm}$	Acceptable range
Salinity Meter (C1)	Theoretical Value (C2)	$D = C1 - C2$	
1420	1420	0	1420 ± 20

2. Salinity Performance check

Salinity, ppt		Correction, ppt	Acceptable range
Instrument Reading	Theoretical Value		
30.1	30.0	0.1	30.0 ± 3

3. Dissolved Oxygen check

Oxygen level in water at 20°C	Dissolved Oxygen, mg O ₂ /L		Correction, mg O ₂ /L	Acceptable range
	D.O. Meter	Winkler Titration		
Saturated	9.0	9.0	0.0	± 0.2
Half-saturated	5.8	5.8	0.0	± 0.2
Zero	0.0	0.0	0.0	± 0.2

4. Turbidity check

Turbidity value in solution, NTU	Calibration Value, NTU	Correction, NTU	Acceptable range
0.00	0.00	0.00	0.00 ± 0.05
100	100	0	100 ± 5

5. pH Meter check

Test Parameters	Performance characteristic	Acceptable range
Liquid junction error ΔpH_j , pH unit	0.01	Less than 0.05
Shift on stirring ΔpH_s , pH unit	0.01	Less than 0.02
Noise ΔpH_n , pH unit	0.01	Less than 0.02

6. Depth Meter check

Instrument Reading, m	Calibration Value, m	Correction, m	Acceptable range
1.0	1.00	0.00	1.00 ± 0.05

*****END OF REPORT*****

**APPENDIX C
ENVIRONMENTAL MONITORING
SCHEDULES**

**Contract No. HY/2003/19 - Improvement to Tung chung Road between Lung Tseng Tau and Cheung Sha
Tentative Air, Noise and Water Quality Monitoring Schedule for June 2009**

Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
31-五月	1-六月	2-六月	3-六月	4-六月	5-六月	6-六月
	Water Quality		Water Quality Noise	24 hr TSP	Water Quality	
7-六月	8-六月	9-六月	10-六月	11-六月	12-六月	13-六月
	Water Quality		Water Quality Noise 24 hr TSP		Water Quality	
14-六月	15-六月	16-六月	17-六月	18-六月	19-六月	20-六月
	Water Quality	24 hr TSP	Water Quality Noise		Water Quality	
21-六月	22-六月	23-六月	24-六月	25-六月	26-六月	27-六月
	Water Quality 24 hr TSP		Water Quality Noise		Water Quality	24 hr TSP
28-六月	29-六月	30-六月	1-七月	2-七月	3-七月	4-七月
	Water Quality	Water Quality Noise				

The schedule may be changed due to unforeseen circumstances (adverse weather, etc)

Remarks: * Construction Noise Levels will be monitored when construction works perform at 19:00 - 23:00 and within a radius of 300m from the noise monitoring locaitons.

**Contract No. HY/2003/19 - Improvement to Tung chung Road between Lung Tseng Tau and Cheung Sha
Tentative Air, Noise and Water Quality Monitoring Schedule for July 2009**

Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
			1-七月	2-七月	3-七月	4-七月
					Water Quality 24 hr TSP	
5-七月	6-七月	7-七月	8-七月	9-七月	10-七月	11-七月
	Water Quality		Water Quality Noise	24 hr TSP	Water Quality	
12-七月	13-七月	14-七月	15-七月	16-七月	17-七月	18-七月
	Water Quality		Water Quality Noise 24 hr TSP		Water Quality	
19-七月	20-七月	21-七月	22-七月	23-七月	24-七月	25-七月
	Water Quality	24 hr TSP	Water Quality Noise		Water Quality	
26-七月	27-七月	28-七月	29-七月	30-七月	31-七月	1-八月
	Water Quality 24 hr TSP		Water Quality Noise		Water Quality	

The schedule may be changed due to unforeseen circumstances (adverse weather, etc)

Remarks: * Construction Noise Levels will be monitored when construction works perform at 19:00 - 23:00 and within a radius of 300m from the noise monitoring locaitons.

**APPENDIX D
24-HOUR TSP MONITORING
RESULTS ,GRAPHICAL
PRESENTATION AND WIND DATA**

Appendix D - 24-hour TSP Monitoring Results

Location AM1 - YMCA of Hong Kong Christian College

Date	Filter Weight (g)		Flow Rate (m ³ /min.)		Elapse Time		Sampling Time(hrs.)	Conc. (µg/m ³)	Weather Condition	Air Temp. (K)	Atmospheric Pressure(Pa)	Particulate weight(g)	Av. flow (m ³ /min)	Total vol. (m ³)
	Initial	Final	Initial	Final	Initial	Final								
4-Jun-09	2.7666	2.8130	1.19	1.19	5189.7	5213.7	24.0	27.1	Cloudy	299.3	752.6	0.0464	1.19	1714.3
10-Jun-09	2.8385	2.8747	1.22	1.22	5213.7	5237.7	24.0	20.6	Cloudy	301.1	757.8	0.0362	1.22	1753.5
16-Jun-09	2.7975	2.8554	1.22	1.22	5237.7	5261.7	24.0	32.9	Cloudy	299.2	758.4	0.0579	1.22	1759.0
22-Jun-09	2.8195	2.9002	1.21	1.21	5261.7	5285.7	24.0	46.2	Cloudy	303.2	755.1	0.0807	1.21	1745.4
27-Jun-09	2.8908	2.9442	1.22	1.22	5285.7	5309.7	24.0	30.4	Cloudy	299.7	755.1	0.0534	1.22	1754.3
							Min	20.6						
							Max	46.2						
							Average	31.5						




Location AM2 - House in Leyburn Villas

Date	Filter Weight (g)		Flow Rate (m ³ /min.)		Elapse Time		Sampling Time(hrs.)	Conc. (µg/m ³)	Weather Condition	Air Temp. (K)	Atmospheric Pressure(Pa)	Particulate weight(g)	Av. flow (m ³ /min)	Total vol. (m ³)
	Initial	Final	Initial	Final	Initial	Final								
4-Jun-09	2.8543	2.8954	1.20	1.20	9983.3	10007.3	24.0	23.8	Cloudy	299.3	752.6	0.0411	1.20	1726.3
10-Jun-09	2.8106	2.8604	1.22	1.22	10007.3	10031.3	24.0	28.3	Cloudy	301.1	757.8	0.0498	1.22	1762.2
16-Jun-09	2.8221	2.8602	1.23	1.23	10031.3	10055.3	24.0	21.5	Cloudy	299.2	758.4	0.0381	1.23	1768.1
22-Jun-09	2.7904	2.8340	1.22	1.22	10055.3	10079.3	24.0	24.9	Cloudy	303.2	755.1	0.0436	1.22	1753.5
27-Jun-09	2.8709	2.9102	1.22	1.22	10079.3	10103.3	24.0	22.3	Cloudy	299.7	755.1	0.0393	1.22	1763.1
							Min	21.5						
							Max	28.3						
							Average	24.2						

Location AM4 - No.31 South Lantau Road

Date	Filter Weight (g)		Flow Rate (m ³ /min.)		Elapse Time		Sampling Time(hrs.)	Conc. (µg/m ³)	Weather Condition	Air Temp. (K)	Atmospheric Pressure(Pa)	Particulate weight(g)	Av. flow (m ³ /min)	Total vol. (m ³)
	Initial	Final	Initial	Final	Initial	Final								
4-Jun-09	2.8584	2.9221	1.19	1.19	9838.5	9862.5	24.0	37.0	Cloudy	299.3	752.6	0.0637	1.19	1720.3
10-Jun-09	2.7868	2.8689	1.22	1.22	9862.5	9886.5	24.0	46.6	Cloudy	301.1	757.8	0.0821	1.22	1761.0
16-Jun-09	2.8512	2.8932	1.23	1.23	9886.5	9910.5	24.0	23.8	Cloudy	299.2	758.4	0.0420	1.23	1766.7
22-Jun-09	2.8846	2.9552	1.22	1.22	9910.5	9934.5	24.0	40.3	Cloudy	303.2	755.1	0.0706	1.22	1752.5
27-Jun-09	2.8739	2.9334	1.22	1.22	9934.5	9958.5	24.0	33.8	Cloudy	299.7	755.1	0.0595	1.22	1761.9
							Min	23.8						
							Max	46.6						
							Average	36.3						


24-hour TSP Levels

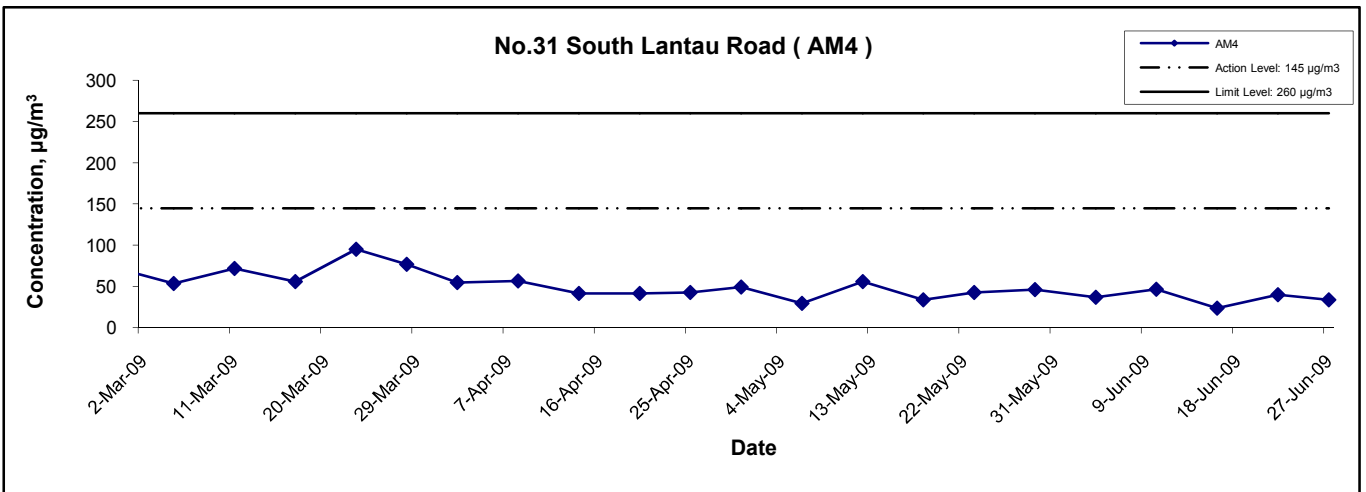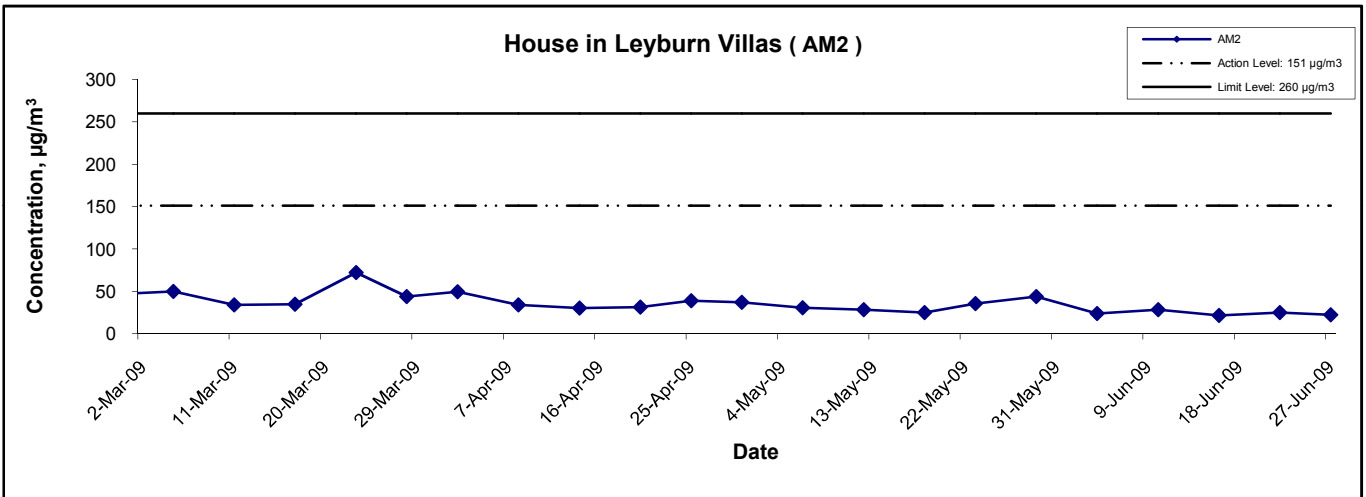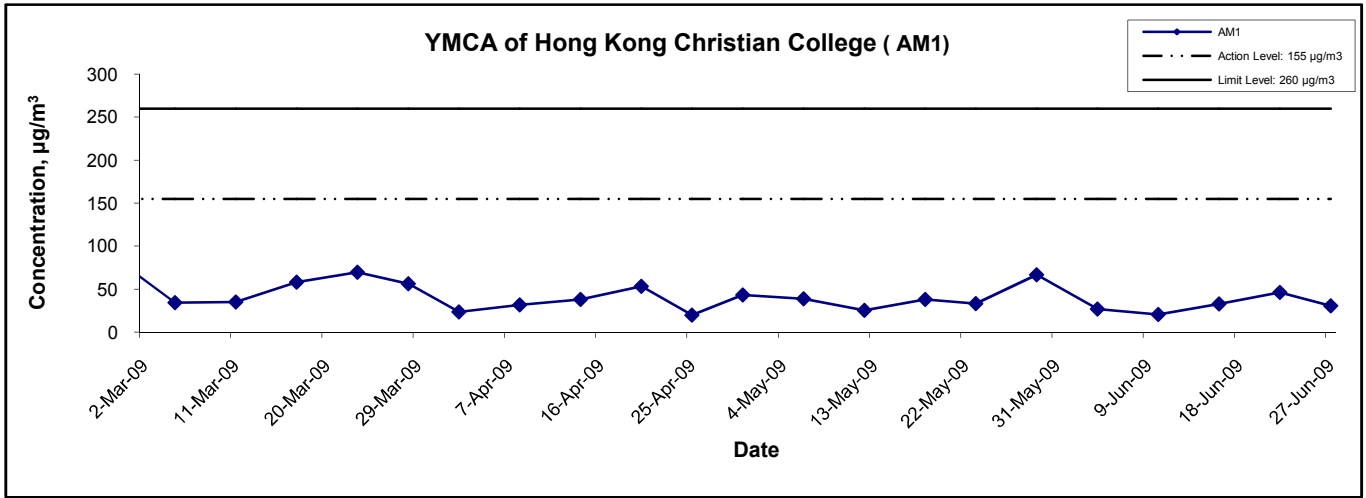

Title Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of 24-hour TSP Monitoring Results	Contract No. HY/2003/19	Scale N.T.S	Project No. MA6030	
	Date Jun 09	Appendix D		

Wind Data (HK International Airport)


(於香港時間 2009 年06月04日23時50分更新) (Updated at 23:50H on 4 Jun 2009)

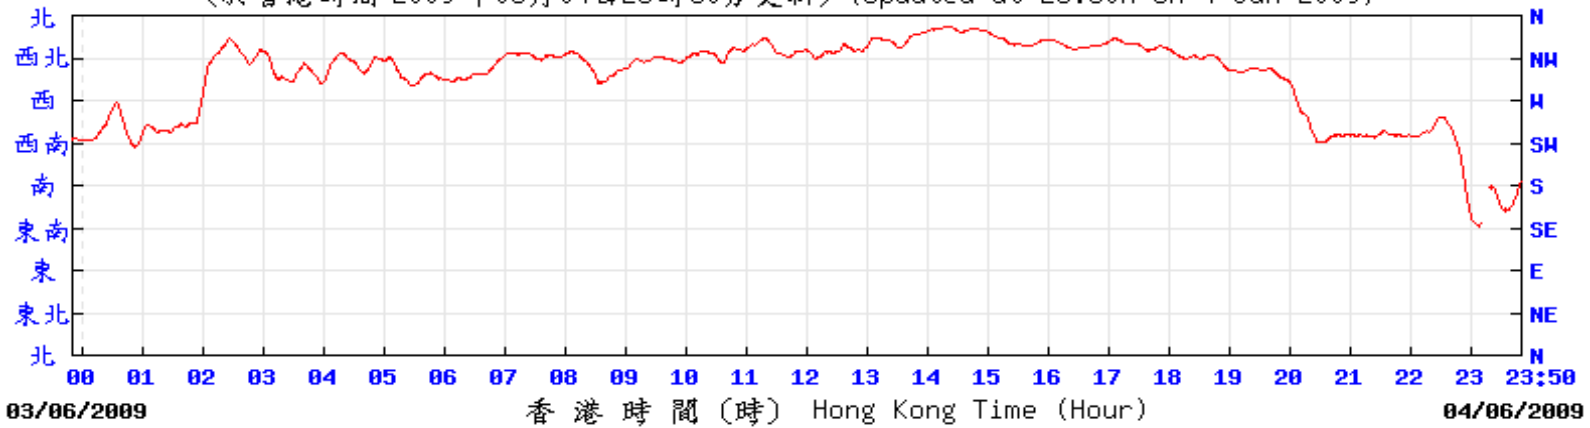

r2c

© 香港天文台 Hong Kong Observatory

(於香港時間 2009 年06月10日23時50分更新) (Updated at 23:50H on 10 Jun 2009)

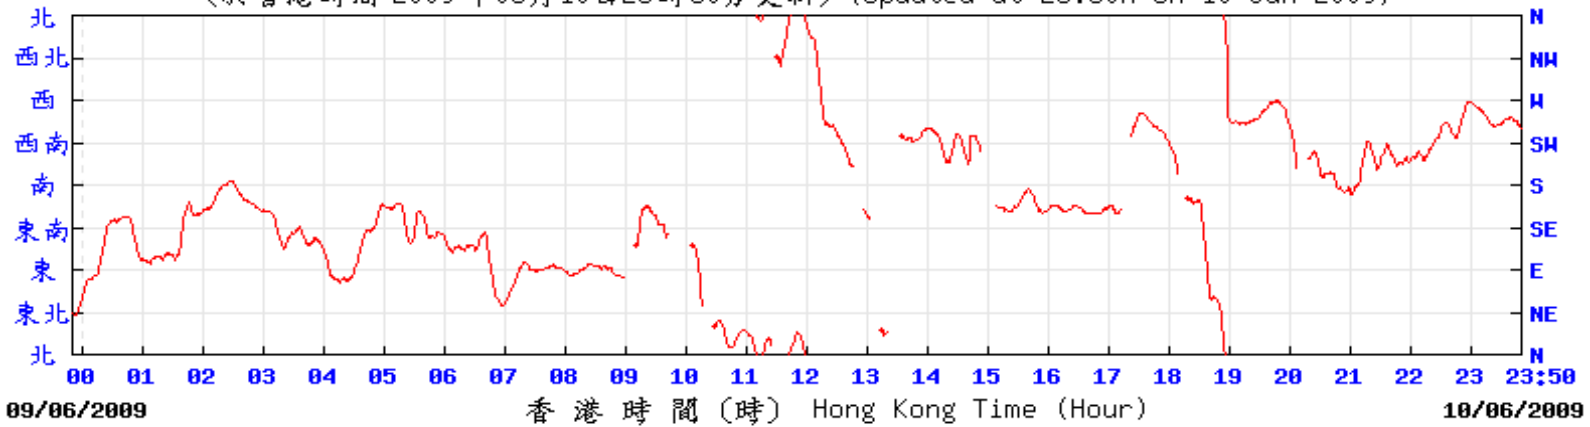


r2c

© 香港天文台 Hong Kong Observatory

Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Wind Data Extracted from the Hong Kong Observatory (HK International Airport)	Scale N.T.S	Project No. MA6030	CINOTECH
	Date Jun 09	Appendix D	

Wind Data (HK International Airport)


(於香港時間 2009 年06月16日23時50分更新) (Updated at 23:50H on 16 Jun 2009)

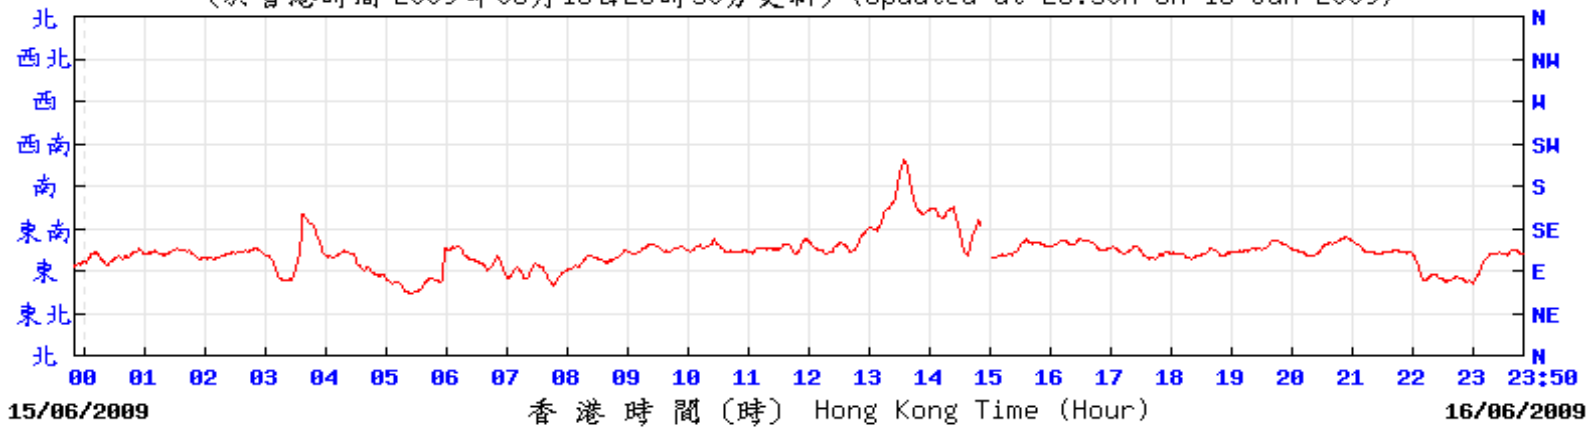

© 香港天文台 Hong Kong Observatory

r2c

(於香港時間 2009 年06月22日23時50分更新) (Updated at 23:50H on 22 Jun 2009)

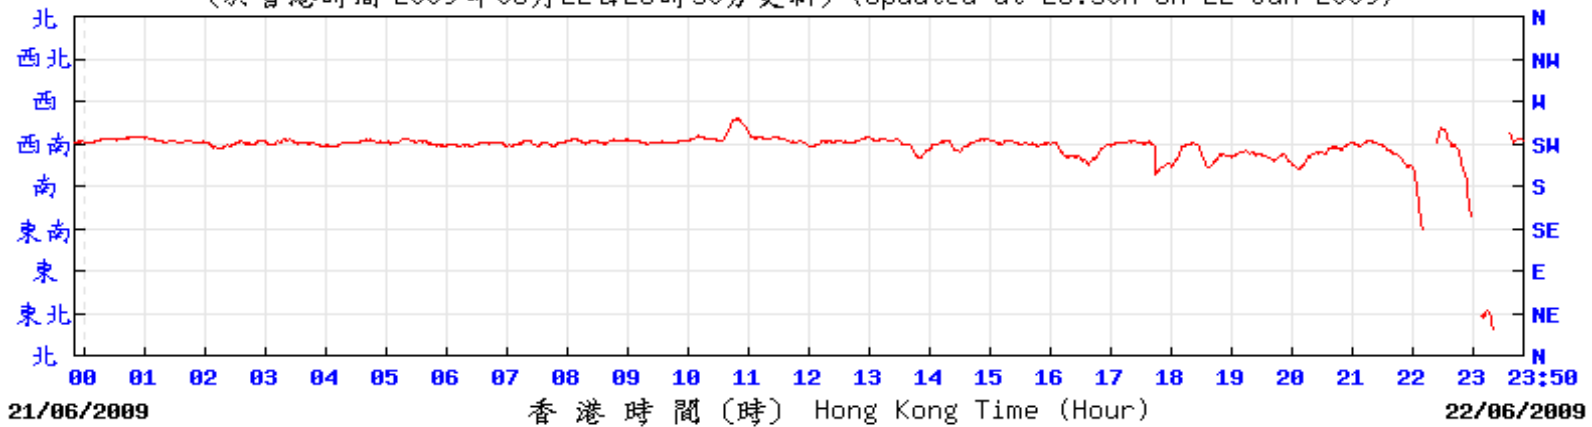


© 香港天文台 Hong Kong Observatory

r2c

Title	Contract No. HY/2003/19	Scale	Project	CINOTECH
	Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha	N.T.S	No. MA6030	
	Wind Data Extracted from the Hong Kong Observatory (HK International Airport)	Date	Appendix	
		Jun 09	D	

Wind Data (HK International Airport)

(於香港時間 2009 年06月27日23時50分更新) (Updated at 23:50H on 27 Jun 2009)

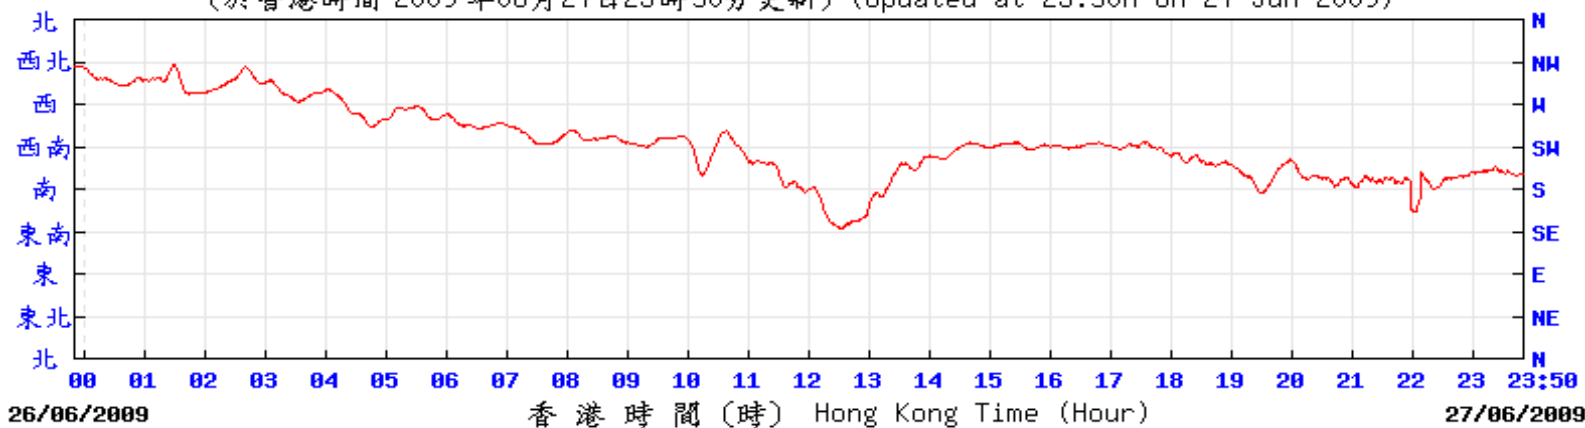

26/06/2009

香港時間 (時) Hong Kong Time (Hour)

27/06/2009

r2c

© 香港天文台 Hong Kong Observatory

Title

Contract No. HY/2003/19
Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha

Wind Data Extracted from the Hong Kong Observatory (HK International Airport)

Scale

N.T.S

Date

Jun 09

Project

No. MA6030


Appendix

D

CINOTECH

Wind Data (Cheung Chau)


(於香港時間 2009 年06月04日23時50分更新) (Updated at 23:50H on 4 Jun 2009)

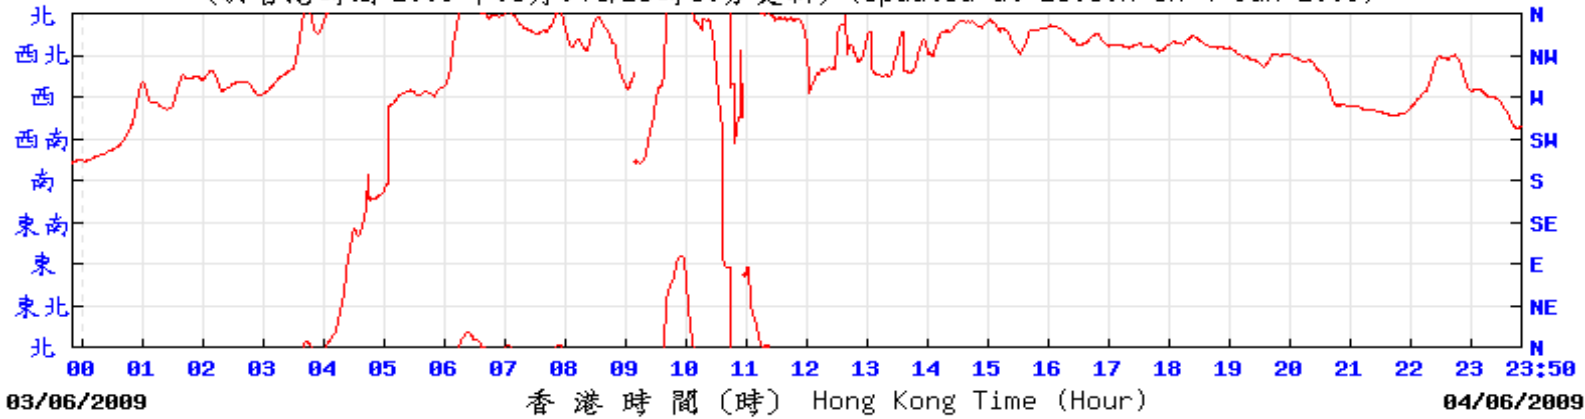

cch

© 香港天文台 Hong Kong Observatory

(於香港時間 2009 年06月10日23時50分更新) (Updated at 23:50H on 10 Jun 2009)

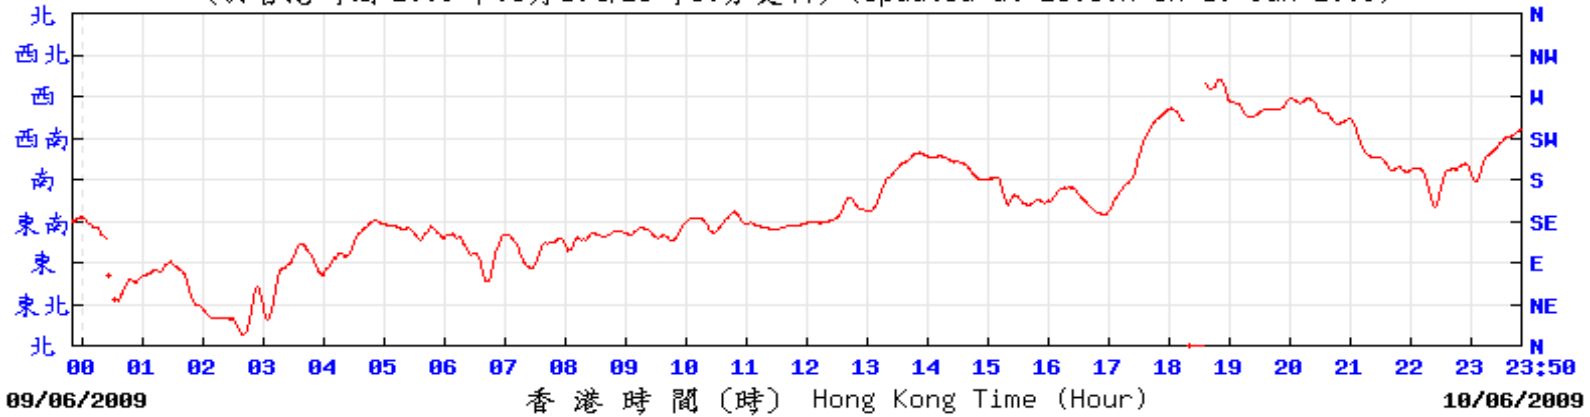


cch

© 香港天文台 Hong Kong Observatory

Title	Contract No. HY/2003/19	Scale	Project	CINOTECH
	Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha	N.T.S	No. MA6030	
	Wind Data Extracted from the Hong Kong Observatory (Cheung Chau)	Date	Appendix	
		Jun 09	D	

Wind Data (Cheung Chau)


(於香港時間 2009 年06月16日23時50分更新) (Updated at 23:50H on 16 Jun 2009)

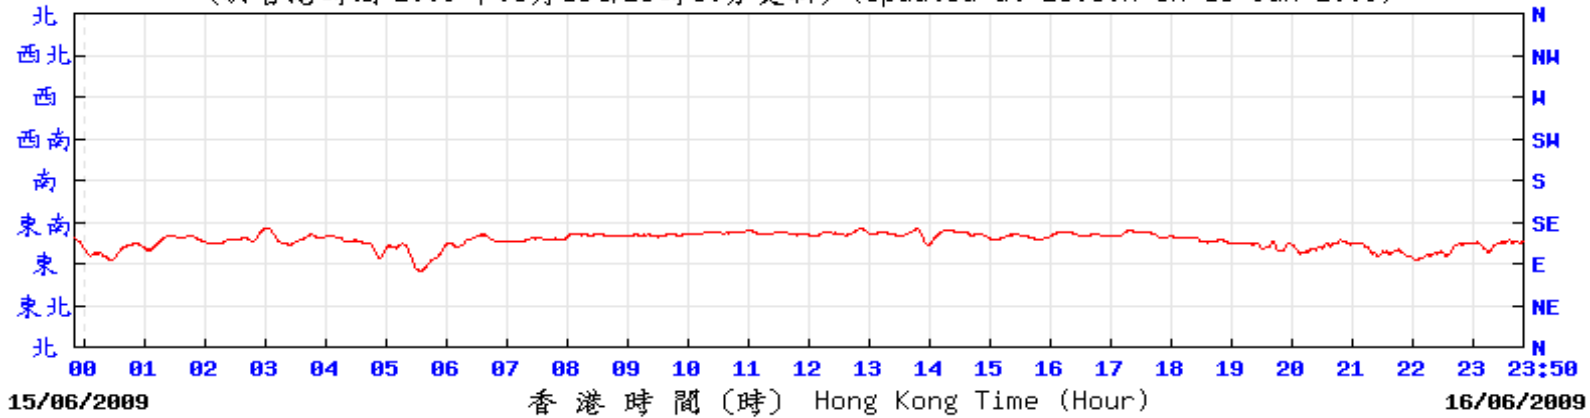

cch

© 香港天文台 Hong Kong Observatory

(於香港時間 2009 年06月22日23時50分更新) (Updated at 23:50H on 22 Jun 2009)

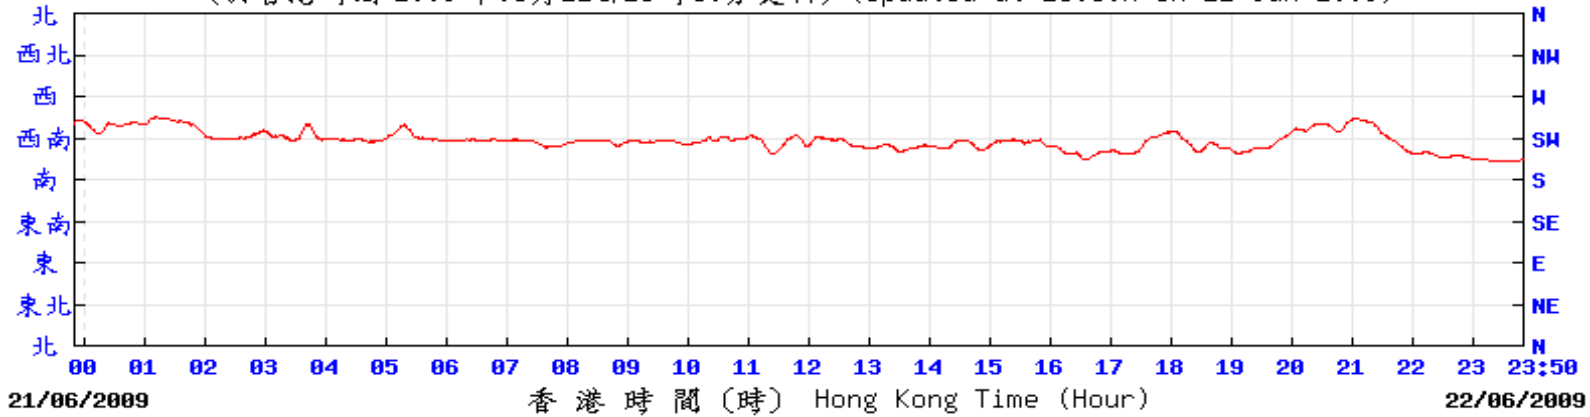


cch

© 香港天文台 Hong Kong Observatory

Title	Contract No. HY/2003/19	Scale	Project	CINOTECH
	Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha	N.T.S	No. MA6030	
	Wind Data Extracted from the Hong Kong Observatory (Cheung Chau)	Date	Appendix	
		Jun 09	D	

Wind Data (Cheung Chau)

(於香港時間 2009 年06月27日23時50分更新) (Updated at 23:50H on 27 Jun 2009)

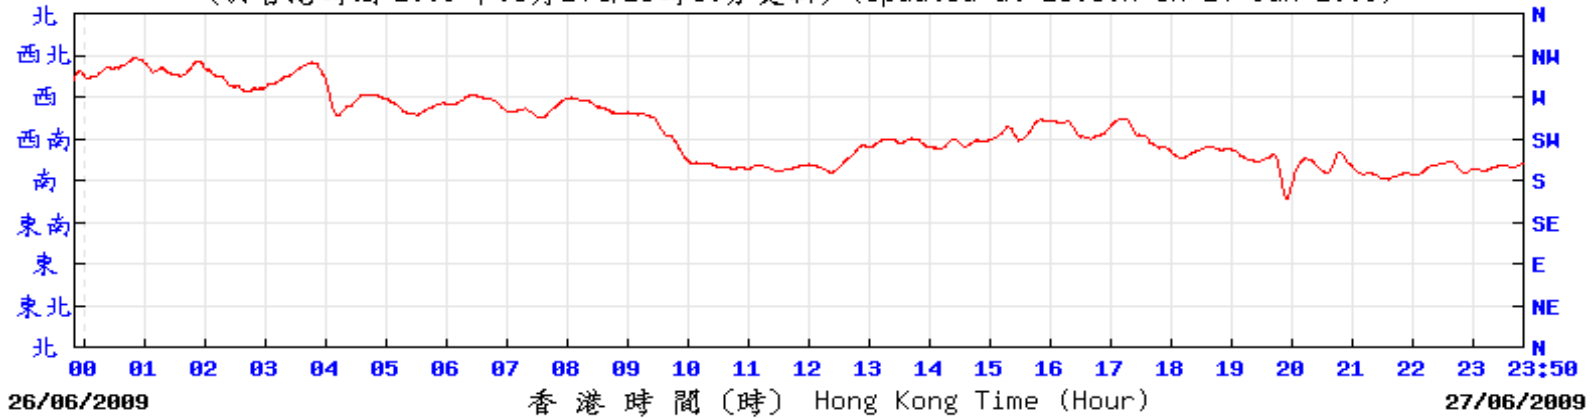

26/06/2009

香港時間 (時) Hong Kong Time (Hour)

27/06/2009

cch

© 香港天文台 Hong Kong Observatory

Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Wind Data Extracted from the Hong Kong Observatory (Cheung Chau)	Scale N.T.S	Project No. MA6030	CINOTECH
	Date Jun 09	Appendix D	

**APPENDIX E
NOISE MONITORING RESULTS AND
GRAPHICAL PRESENTATION**

Appendix E - Noise Monitoring Results

Location NM1 - No. 28 Lung Tseng Tau					
Date	Time	Weather	dB (A) (30-min)		
			L _{eq}	L ₁₀	L ₉₀
3-Jun-09	09:40	Cloudy	64.3	66.5	61.0
10-Jun-09	09:40	Fine	64.2	66.0	61.0
17-Jun-09	09:40	Fine	63.5	65.5	60.5
24-Jun-09	09:40	Fine	63.6	66.0	61.0
30-Jun-09	09:40	Fine	63.2	65.5	60.0
		Average	63.8	65.9	60.7
		Minimum	63.2	65.5	60.0
		Maximum	64.3	66.5	61.0

Location NM2 - YMCA of HK Christian College					
Date	Time	Weather	dB (A) (30-min)		
			L _{eq}	L ₁₀	L ₉₀
3-Jun-09	09:00	Cloudy	52.3	54.5	49.5
10-Jun-09	09:00	Fine	53.1	54.5	50.5
17-Jun-09	09:00	Fine	52.1	54.0	49.5
24-Jun-09	09:00	Fine	51.8	52.5	48.0
30-Jun-09	09:00	Fine	52.2	55.0	50.0
		Average	52.3	54.2	49.6
		Minimum	51.8	52.5	48.0
		Maximum	53.1	55.0	50.5

Location NM3 - No. 37 Shek Lau Po					
Date	Time	Weather	dB (A) (30-min)		
			L _{eq}	L ₁₀	L ₉₀
3-Jun-09	10:20	Cloudy	40.0	41.0	39.0
10-Jun-09	10:20	Fine	40.1	41.0	39.0
17-Jun-09	10:20	Fine	40.0	41.0	39.0
24-Jun-09	10:20	Fine	40.1	41.5	39.0
30-Jun-09	10:20	Fine	40.2	41.5	39.5
		Average	40.1	41.2	39.1
		Minimum	40.0	41.0	39.0
		Maximum	40.2	41.5	39.5

Location NM4 - No.1 Shek Mun Kap					
Date	Time	Weather	dB (A) (30-min)		
			L _{eq}	L ₁₀	L ₉₀
3-Jun-09	11:00	Cloudy	52.6	54.5	48.5
10-Jun-09	11:00	Fine	52.6	54.5	50.0
17-Jun-09	11:00	Fine	51.5	53.5	49.0
24-Jun-09	11:00	Fine	51.3	52.5	48.0
30-Jun-09	11:00	Fine	51.2	52.5	49.0
		Average	51.9	53.6	49.0
		Minimum	51.2	52.5	48.0
		Maximum	52.6	54.5	50.0




Appendix E - Noise Monitoring Results

Location NM5 - Tung Chung Au Country Parks Management Centre					
Date	Time	Weather	dB (A) (30-min)		
			L _{eq}	L ₁₀	L ₉₀
3-Jun-09	13:00	Cloudy	51.2	52.5	48.0
10-Jun-09	13:00	Fine	51.2	52.5	48.5
17-Jun-09	13:00	Fine	51.1	52.5	48.0
24-Jun-09	13:00	Fine	51.7	52.5	47.5
30-Jun-09	13:00	Fine	50.8	52.0	48.0
Average			51.2	52.4	48.0
Minimum			50.8	52.0	47.5
Maximum			51.7	52.5	48.5

Location NM6 - D75 Leyburn Villa					
Date	Time	Weather	dB (A) (30-min)		
			L _{eq}	L ₁₀	L ₉₀
3-Jun-09	13:45	Cloudy	39.6	41.0	38.5
10-Jun-09	13:45	Fine	39.8	41.0	39.0
17-Jun-09	13:45	Fine	40.2	41.5	39.5
24-Jun-09	13:45	Fine	40.0	41.0	39.0
30-Jun-09	13:45	Fine	40.0	41.0	39.0
Average			39.9	41.1	39.0
Minimum			39.6	41.0	38.5
Maximum			40.2	41.5	39.5




Location NM8 - No. 31 South Lantau Road					
Date	Time	Weather	dB (A) (30-min)		
			L _{eq}	L ₁₀	L ₉₀
3-Jun-09	14:25	Cloudy	61.7	63.5	58.5
10-Jun-09	14:25	Fine	61.3	63.5	58.5
17-Jun-09	14:25	Fine	61.7	63.5	58.5
24-Jun-09	14:25	Fine	61.1	62.5	58.0
30-Jun-09	14:25	Fine	60.7	62.5	58.5
Average			61.3	63.1	58.4
Minimum			60.7	62.5	58.0
Maximum			61.7	63.5	58.5

Noise Levels

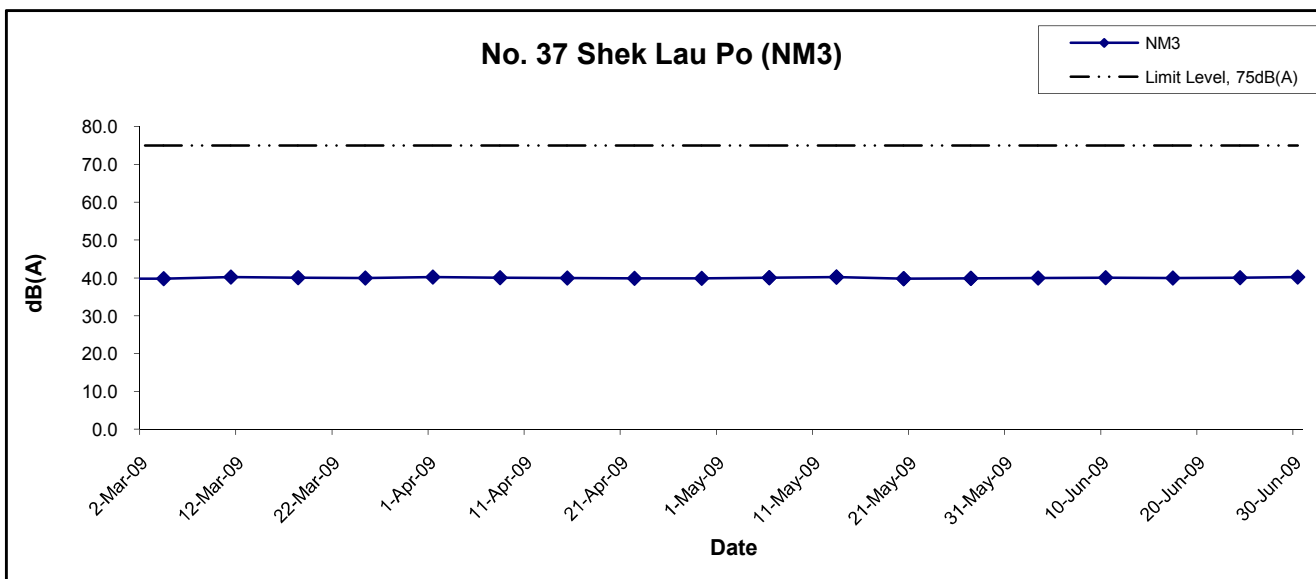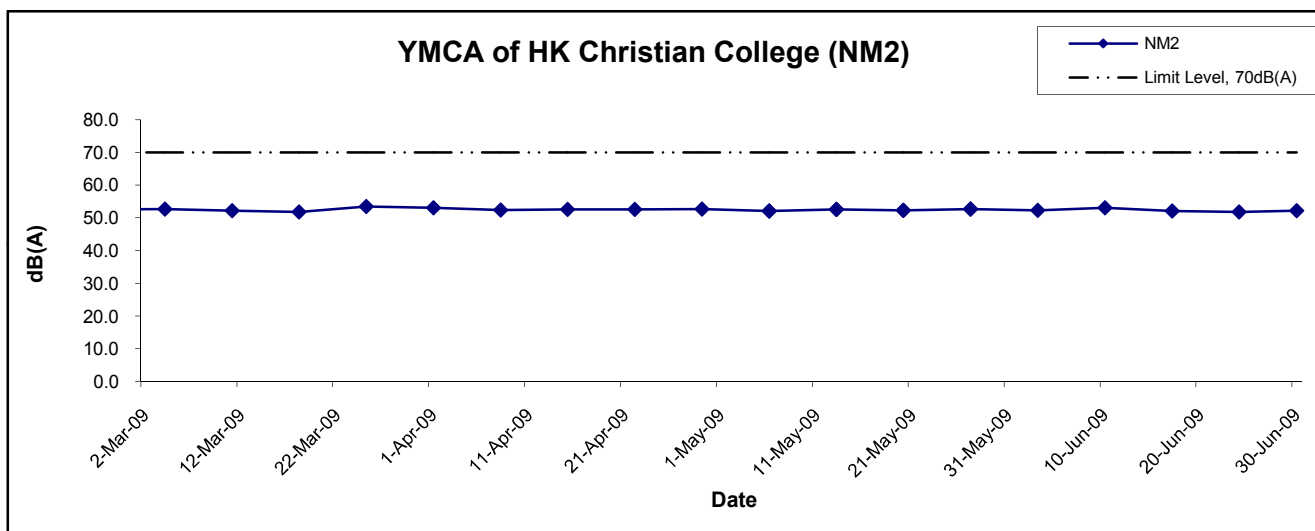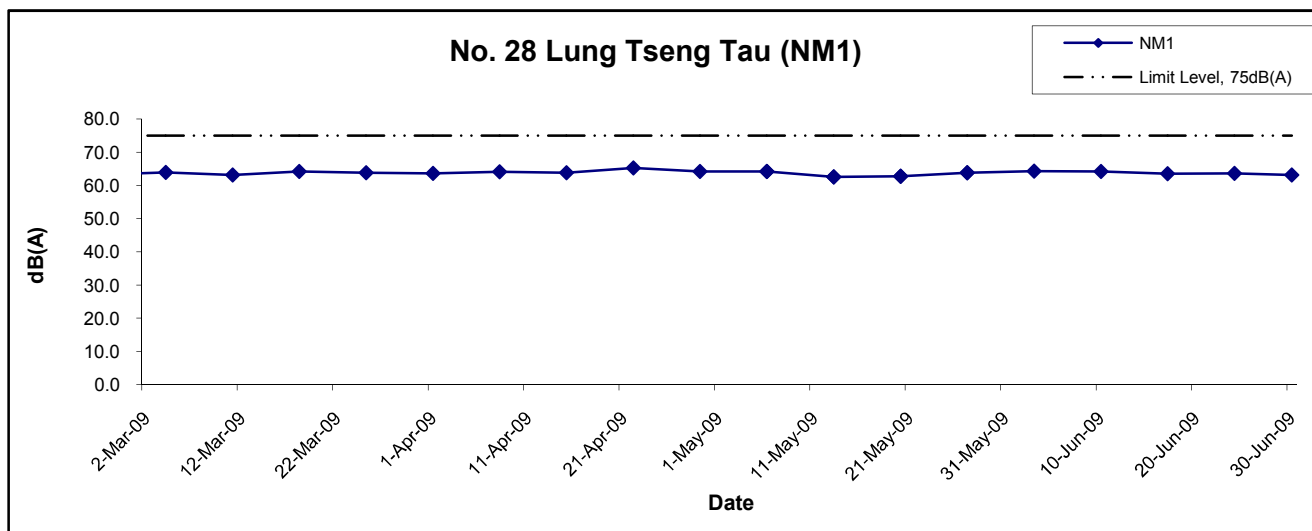


Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Construction Noise Monitoring Results	Scale N.T.S	Project No. MA6030	
	Date Jun 09	Appendix E	

Noise Levels

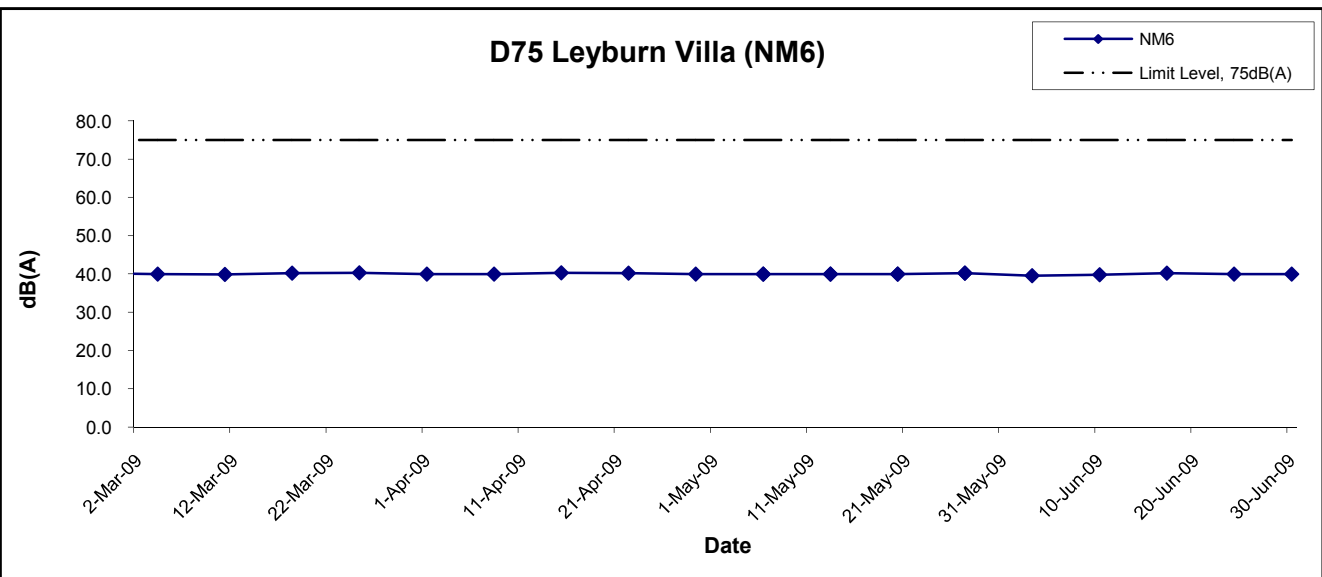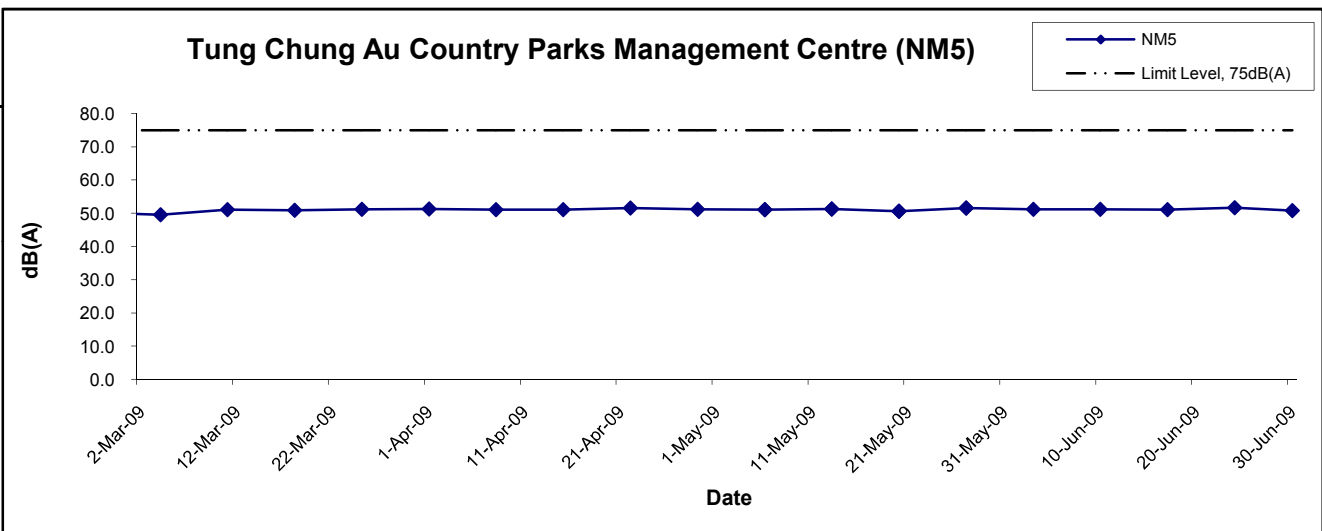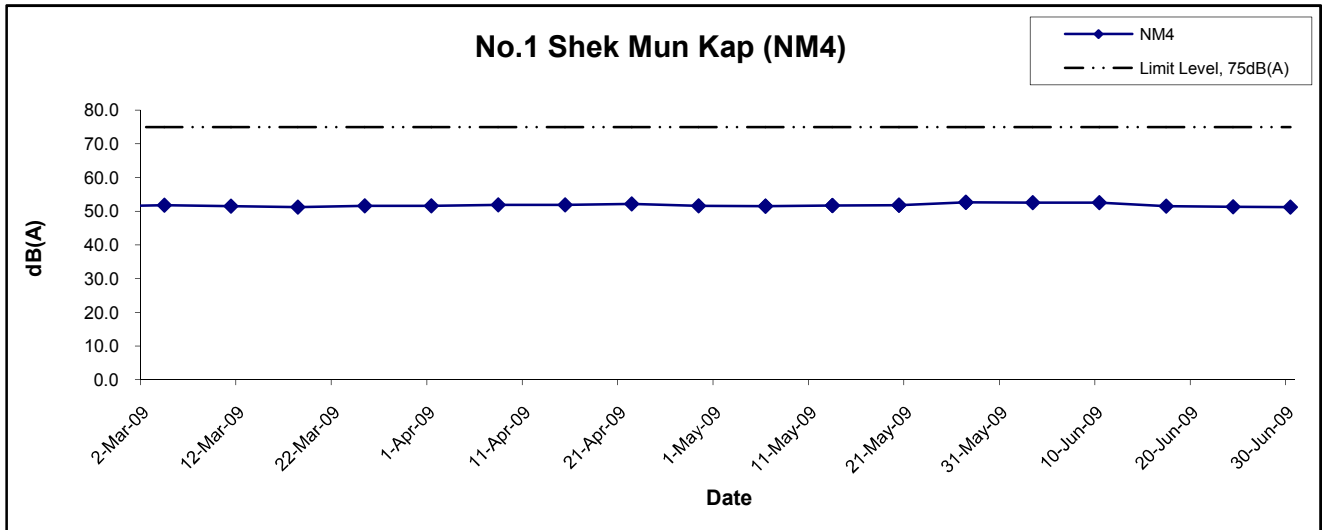

Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Construction Noise Monitoring Results	Scale N.T.S	Project No. MA6030	
	Date Jun 09	Appendix E	

Noise Levels

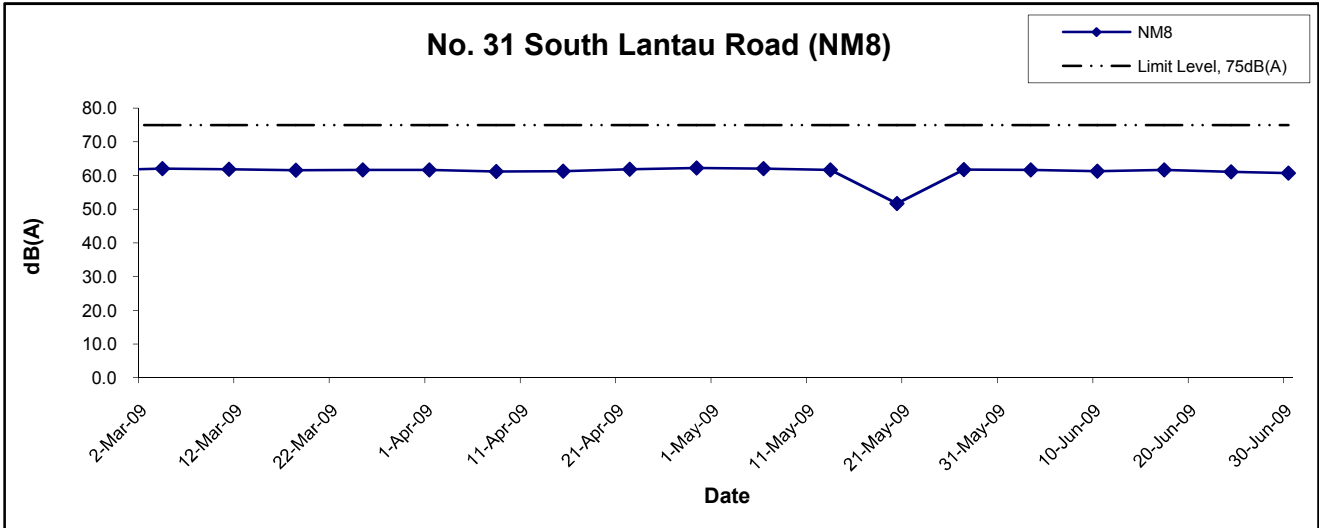

Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Construction Noise Monitoring Results	Scale N.T.S	Project No. MA6030	
	Date Jun 09	Appendix E	

**APPENDIX F
WATER QUALITY MONITORING
RESULTS AND GRAPHICAL
PRESENTATION**

Water Quality Monitoring Results at 15_I

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
1-Jun-09	Sunny	Calm	13:00	Middle	0.09	19.1 19.2	19.2	7.5 7.5	7.5	0.02 0.02	0.02	96.2 96.0	96.1	7.6 7.6	7.6	1.9 1.9	1.9	<2.5 <2.5	<2.5
3-Jun-09	Cloudy	Calm	11:42	Middle	0.09	19.1 19.1	19.1	7.5 7.5	7.5	0.02 0.02	0.02	94.9 94.7	94.8	7.6 7.6	7.6	1.7 1.7	1.7	<2.5 <2.5	<2.5
5-Jun-09	Sunny	Calm	11:53	Middle	0.09	19.1 19.1	19.1	7.5 7.5	7.5	0.02 0.02	0.02	95.6 95.4	95.5	7.6 7.6	7.6	1.6 1.6	1.6	<2.5 <2.5	<2.5
8-Jun-09	Cloudy	Calm	12:20	Middle	0.09	19.1 19.1	19.1	7.5 7.5	7.5	0.02 0.02	0.02	96.8 96.6	96.7	7.7 7.6	7.7	1.7 1.7	1.7	<2.5 <2.5	<2.5
10-Jun-09	Cloudy	Calm	11:46	Middle	0.09	19.1 19.1	19.1	7.5 7.5	7.5	0.02 0.02	0.02	96.3 96.1	96.2	7.6 7.6	7.6	1.6 1.6	1.6	<2.5 <2.5	<2.5
12-Jun-09	Cloudy	Calm	11:41	Middle	0.09	19.0 19.0	19	7.5 7.5	7.5	0.02 0.02	0.02	95.5 95.3	95.4	7.6 7.6	7.6	1.7 1.7	1.7	<2.5 <2.5	<2.5
15-Jun-09	Cloudy	Calm	12:02	Middle	0.09	19.1 19.1	19.1	7.5 7.5	7.5	0.02 0.02	0.02	96.6 96.4	96.5	7.7 7.6	7.7	1.6 1.6	1.6	<2.5 <2.5	<2.5
17-Jun-09	Sunny	Calm	11:36	Middle	0.09	19.0 19.1	19.1	7.5 7.5	7.5	0.02 0.02	0.02	95.8 95.6	95.7	7.6 7.6	7.6	1.7 1.7	1.7	<2.5 <2.5	<2.5
19-Jun-09	Cloudy	Calm	11:52	Middle	0.09	19.0 19.0	19	7.6 7.5	7.6	0.02 0.02	0.02	96.7 96.5	96.6	7.7 7.6	7.7	1.6 1.7	1.7	<2.5 <2.5	<2.5
22-Jun-09	Cloudy	Calm	12:13	Middle	0.09	19.0 19.0	19	7.5 7.5	7.5	0.02 0.02	0.02	95.4 95.2	95.3	7.6 7.6	7.6	1.5 1.6	1.6	<2.5 <2.5	<2.5
24-Jun-09	Rainy	Calm	11:29	Middle	0.09	19.0 19.0	19	7.6 7.6	7.6	0.02 0.02	0.02	96.1 95.9	96	7.6 7.6	7.6	1.6 1.7	1.7	<2.5 <2.5	<2.5
26-Jun-09	Rainy	Calm	11:57	Middle	0.09	19.0 19.0	19	7.6 7.6	7.6	0.02 0.02	0.02	97.2 97.0	97.1	7.7 7.7	7.7	1.5 1.6	1.6	<2.5 <2.5	<2.5
29-Jun-09	Fine	Calm	14:25	Middle	0.09	18.9 18.9	18.9	7.6 7.6	7.6	0.02 0.02	0.02	96.6 96.4	96.5	7.7 7.6	7.7	1.6 1.7	1.7	<2.5 <2.5	<2.5
30-Jun-09	Cloudy	Calm	12:10	Middle	0.09	19.0 19.0	19	7.6 7.6	7.6	0.02 0.02	0.02	94.9 94.7	94.8	7.6 7.6	7.6	1.6 1.7	1.7	<2.5 <2.5	<2.5

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: * Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher
 ** Cancelled due to Thunderstorm Warning

Water Quality Monitoring Results at 15_R

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
1-Jun-09	Sunny	Calm	12:53	Middle	0.08	19.1 19.1	19.1	7.6 7.6	7.6	0.02 0.02	0.02	91.0 90.9	91	7.1 7.1	7.1	1.9 2.0	2	<2.5 <2.5	<2.5
3-Jun-09	Cloudy	Calm	11:35	Middle	0.08	19.1 19.1	19.1	7.6 7.6	7.6	0.02 0.02	0.02	89.7 89.6	89.7	7.1 7.1	7.1	1.7 1.8	1.8	<2.5 <2.5	<2.5
5-Jun-09	Sunny	Calm	11:47	Middle	0.08	19.0 19.1	19.1	7.6 7.6	7.6	0.02 0.02	0.02	90.4 90.3	90.4	7.1 7.1	7.1	1.6 1.7	1.7	<2.5 <2.5	<2.5
8-Jun-09	Cloudy	Calm	12:13	Middle	0.08	19.1 19.1	19.1	7.6 7.6	7.6	0.02 0.02	0.02	91.6 91.5	91.6	7.2 7.2	7.2	1.7 1.8	1.8	<2.5 <2.5	<2.5
10-Jun-09	Cloudy	Calm	11:39	Middle	0.08	19.1 19.1	19.1	7.6 7.6	7.6	0.02 0.02	0.02	91.1 91.0	91.1	7.1 7.1	7.1	1.6 1.7	1.7	<2.5 <2.5	<2.5
12-Jun-09	Cloudy	Calm	11:34	Middle	0.08	19.0 19.0	19	7.6 7.6	7.6	0.02 0.02	0.02	90.3 90.2	90.3	7.1 7.1	7.1	1.7 1.8	1.8	<2.5 <2.5	<2.5
15-Jun-09	Cloudy	Calm	11:56	Middle	0.08	19.0 19.0	19	7.6 7.6	7.6	0.02 0.02	0.02	91.4 91.3	91.4	7.1 7.1	7.1	1.6 1.7	1.7	<2.5 <2.5	<2.5
17-Jun-09	Sunny	Calm	11:29	Middle	0.08	19.0 19.0	19	7.6 7.6	7.6	0.02 0.02	0.02	90.6 90.5	90.6	7.1 7.1	7.1	1.7 1.8	1.8	<2.5 <2.5	<2.5
19-Jun-09	Cloudy	Calm	11:45	Middle	0.08	19.0 19.0	19	7.7 7.7	7.7	0.02 0.02	0.02	91.5 91.4	91.5	7.2 7.2	7.2	1.7 1.7	1.7	<2.5 <2.5	<2.5
22-Jun-09	Cloudy	Calm	12:07	Middle	0.08	18.9 18.9	18.9	7.6 7.6	7.6	0.02 0.02	0.02	90.2 90.1	90.2	7.1 7.1	7.1	1.6 1.6	1.6	<2.5 <2.5	<2.5
24-Jun-09	Rainy	Calm	11:22	Middle	0.08	18.9 18.9	18.9	7.7 7.7	7.7	0.02 0.02	0.02	90.9 90.8	90.9	7.1 7.1	7.1	1.7 1.7	1.7	<2.5 <2.5	<2.5
26-Jun-09	Rainy	Calm	11:51	Middle	0.08	18.9 18.9	18.9	7.7 7.7	7.7	0.02 0.02	0.02	92.0 91.9	92	7.2 7.2	7.2	1.6 1.6	1.6	<2.5 <2.5	<2.5
29-Jun-09	Fine	Calm	14:18	Middle	0.08	18.9 18.9	18.9	7.7 7.7	7.7	0.02 0.02	0.02	91.4 91.3	91.4	7.1 7.1	7.1	1.7 1.7	1.7	<2.5 <2.5	<2.5
30-Jun-09	Cloudy	Calm	12:03	Middle	0.08	18.9 18.9	18.9	7.7 7.7	7.7	0.02 0.02	0.02	89.7 89.6	89.7	7.1 7.1	7.1	1.7 1.7	1.7	<2.5 <2.5	<2.5

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: * Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher
 ** Cancelled due to Thunderstorm Warning

Water Quality Monitoring Results at 18_I

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
1-Jun-09	Sunny	Calm	12:45	Middle	0.1	19.0 19.0	19	7.9 7.8	7.9	0.02 0.02	0.02	94.6 94.9	94.8	7.5 7.5	7.5	1.8 1.8	1.8	<2.5 <2.5	<2.5
3-Jun-09	Cloudy	Calm	11:27	Middle	0.1	18.9 19.0	19	7.8 7.8	7.8	0.02 0.02	0.02	93.3 93.6	93.5	7.4 7.5	7.5	1.7 1.7	1.7	<2.5 <2.5	<2.5
5-Jun-09	Sunny	Calm	11:38	Middle	0.1	18.9 18.9	18.9	7.8 7.8	7.8	0.02 0.02	0.02	94.0 94.3	94.2	7.5 7.5	7.5	1.7 1.7	1.7	<2.5 <2.5	<2.5
8-Jun-09	Cloudy	Calm	12:05	Middle	0.1	18.9 19.0	19	7.8 7.8	7.8	0.02 0.02	0.02	95.2 95.5	95.4	7.5 7.6	7.6	1.7 1.7	1.7	<2.5 <2.5	<2.5
10-Jun-09	Cloudy	Calm	11:31	Middle	0.1	19.0 19.0	19	7.8 7.8	7.8	0.02 0.02	0.02	94.7 95.0	94.9	7.5 7.5	7.5	1.7 1.7	1.7	<2.5 <2.5	<2.5
12-Jun-09	Cloudy	Calm	11:26	Middle	0.1	18.9 18.9	18.9	7.8 7.8	7.8	0.02 0.02	0.02	93.9 94.2	94.1	7.5 7.5	7.5	1.8 1.8	1.8	<2.5 <2.5	<2.5
15-Jun-09	Cloudy	Calm	11:48	Middle	0.1	18.9 18.9	18.9	7.8 7.8	7.8	0.02 0.02	0.02	95.0 95.3	95.2	7.5 7.6	7.6	1.6 1.7	1.7	<2.5 <2.5	<2.5
17-Jun-09	Sunny	Calm	11:21	Middle	0.1	18.9 18.9	18.9	7.8 7.8	7.8	0.02 0.02	0.02	94.2 94.5	94.4	7.5 7.5	7.5	1.7 1.8	1.8	<2.5 <2.5	<2.5
19-Jun-09	Cloudy	Calm	11:37	Middle	0.1	18.8 18.9	18.9	7.9 7.9	7.9	0.02 0.02	0.02	95.1 95.4	95.3	7.5 7.6	7.6	1.6 1.7	1.7	<2.5 <2.5	<2.5
22-Jun-09	Cloudy	Calm	11:58	Middle	0.1	18.8 18.8	18.8	7.8 7.8	7.8	0.02 0.02	0.02	93.8 94.1	94	7.5 7.5	7.5	1.5 1.6	1.6	<2.5 <2.5	<2.5
24-Jun-09	Rainy	Calm	11:14	Middle	0.1	18.8 18.8	18.8	7.9 7.9	7.9	0.02 0.02	0.02	94.5 94.8	94.7	7.5 7.5	7.5	1.5 1.6	1.6	<2.5 <2.5	<2.5
26-Jun-09	Rainy	Calm	11:43	Middle	0.1	18.8 18.8	18.8	7.9 7.9	7.9	0.02 0.02	0.02	95.6 95.9	95.8	7.6 7.6	7.6	1.4 1.5	1.5	<2.5 <2.5	<2.5
29-Jun-09	Fine	Calm	14:10	Middle	0.1	18.7 18.8	18.8	7.9 7.9	7.9	0.02 0.02	0.02	95.0 95.3	95.2	7.5 7.6	7.6	1.5 1.6	1.6	<2.5 <2.5	<2.5
30-Jun-09	Cloudy	Calm	11:55	Middle	0.1	18.8 18.8	18.8	7.9 7.9	7.9	0.02 0.02	0.02	93.3 93.6	93.5	7.4 7.5	7.5	1.6 1.7	1.7	<2.5 <2.5	<2.5

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: * Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher
 ** Cancelled due to Thunderstorm Warning

Water Quality Monitoring Results at 18_R

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
1-Jun-09	Sunny	Calm	12:41	Middle	0.175	19.0 19.0	19	7.9 7.9	7.9	0.02 0.02	0.02	94.4 94.5	94.5	7.5 7.5	7.5	1.9 1.9	1.9	<2.5 <2.5	<2.5
3-Jun-09	Cloudy	Calm	11:23	Middle	0.175	18.9 18.9	18.9	7.8 7.8	7.8	0.02 0.02	0.02	93.1 93.2	93.2	7.4 7.4	7.4	1.8 1.8	1.8	<2.5 <2.5	<2.5
5-Jun-09	Sunny	Calm	11:35	Middle	0.175	18.9 18.9	18.9	7.8 7.8	7.8	0.02 0.02	0.02	93.8 93.9	93.9	7.5 7.5	7.5	1.7 1.8	1.8	<2.5 <2.5	<2.5
8-Jun-09	Cloudy	Calm	12:01	Middle	0.175	18.9 18.9	18.9	7.9 7.8	7.9	0.02 0.02	0.02	95.0 95.1	95.1	7.5 7.5	7.5	1.7 1.8	1.8	<2.5 <2.5	<2.5
10-Jun-09	Cloudy	Calm	11:27	Middle	0.175	18.9 18.9	18.9	7.8 7.8	7.8	0.02 0.02	0.02	94.5 94.6	94.6	7.5 7.5	7.5	1.7 1.8	1.8	<2.5 <2.5	<2.5
12-Jun-09	Cloudy	Calm	11:22	Middle	0.175	18.8 18.8	18.8	7.8 7.8	7.8	0.02 0.02	0.02	93.7 93.8	93.8	7.5 7.5	7.5	1.8 1.9	1.9	<2.5 <2.5	<2.5
15-Jun-09	Cloudy	Calm	11:44	Middle	0.175	18.9 18.9	18.9	7.9 7.8	7.9	0.02 0.02	0.02	94.8 94.9	94.9	7.5 7.5	7.5	1.7 1.7	1.7	<2.5 <2.5	<2.5
17-Jun-09	Sunny	Calm	11:17	Middle	0.175	18.9 18.9	18.9	7.8 7.8	7.8	0.02 0.02	0.02	94.0 94.1	94.1	7.5 7.5	7.5	1.8 1.8	1.8	3.0 3.0	3
19-Jun-09	Cloudy	Calm	11:33	Middle	0.175	18.8 18.8	18.8	7.9 7.9	7.9	0.02 0.02	0.02	94.9 95.0	95	7.5 7.5	7.5	1.7 1.7	1.7	<2.5 <2.5	<2.5
22-Jun-09	Cloudy	Calm	11:55	Middle	0.175	18.8 18.8	18.8	7.9 7.8	7.9	0.02 0.02	0.02	93.6 93.7	93.7	7.5 7.5	7.5	1.6 1.6	1.6	<2.5 <2.5	<2.5
24-Jun-09	Rainy	Calm	11:10	Middle	0.175	18.8 18.8	18.8	7.9 7.9	7.9	0.02 0.02	0.02	94.3 94.4	94.4	7.5 7.5	7.5	1.6 1.6	1.6	<2.5 <2.5	<2.5
26-Jun-09	Rainy	Calm	11:39	Middle	0.175	18.8 18.8	18.8	7.9 7.9	7.9	0.02 0.02	0.02	95.4 95.5	95.5	7.5 7.5	7.5	1.5 1.5	1.5	<2.5 <2.5	<2.5
29-Jun-09	Fine	Calm	14:06	Middle	0.175	18.7 18.7	18.7	7.9 7.9	7.9	0.02 0.02	0.02	94.8 94.9	94.9	7.5 7.5	7.5	1.6 1.6	1.6	<2.5 <2.5	<2.5
30-Jun-09	Cloudy	Calm	11:51	Middle	0.175	18.8 18.8	18.8	7.9 7.9	7.9	0.02 0.02	0.02	93.1 93.2	93.2	7.4 7.4	7.4	1.7 1.7	1.7	<2.5 <2.5	<2.5

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: * Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher
 ** Cancelled due to Thunderstorm Warning

Water Quality Monitoring Results at 21_I

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
1-Jun-09	Sunny	Calm	12:37	Middle	0.14	18.9 18.9	18.9	7.7 7.7	7.7	0.02 0.02	0.02	96.3 96.3	96.3	7.7 7.7	7.7	1.8 1.9	1.9	<2.5 <2.5	<2.5
3-Jun-09	Cloudy	Calm	11:19	Middle	0.14	18.9 18.9	18.9	7.6 7.6	7.6	0.02 0.02	0.02	95.0 95.0	95	7.6 7.6	7.6	1.7 1.8	1.8	<2.5 <2.5	<2.5
5-Jun-09	Sunny	Calm	11:31	Middle	0.14	18.9 18.9	18.9	7.6 7.6	7.6	0.02 0.02	0.02	95.7 95.7	95.7	7.6 7.6	7.6	1.7 1.7	1.7	<2.5 <2.5	<2.5
8-Jun-09	Cloudy	Calm	11:57	Middle	0.14	18.9 18.9	18.9	7.6 7.7	7.7	0.02 0.02	0.02	96.9 96.9	96.9	7.7 7.7	7.7	1.7 1.7	1.7	<2.5 <2.5	<2.5
10-Jun-09	Cloudy	Calm	11:23	Middle	0.14	18.9 18.9	18.9	7.6 7.6	7.6	0.02 0.02	0.02	96.4 96.4	96.4	7.7 7.7	7.7	1.6 1.6	1.6	<2.5 <2.5	<2.5
12-Jun-09	Cloudy	Calm	11:18	Middle	0.14	18.8 18.8	18.8	7.6 7.6	7.6	0.02 0.02	0.02	95.6 95.6	95.6	7.6 7.6	7.6	1.7 1.7	1.7	<2.5 <2.5	<2.5
15-Jun-09	Cloudy	Calm	11:40	Middle	0.14	18.8 18.9	18.9	7.6 7.7	7.7	0.02 0.02	0.02	96.7 96.7	96.7	7.7 7.7	7.7	1.6 1.6	1.6	<2.5 <2.5	<2.5
17-Jun-09	Sunny	Calm	11:13	Middle	0.14	18.8 18.8	18.8	7.6 7.6	7.6	0.02 0.02	0.02	95.9 95.9	95.9	7.7 7.7	7.7	1.7 1.7	1.7	<2.5 <2.5	<2.5
19-Jun-09	Cloudy	Calm	11:29	Middle	0.14	18.8 18.8	18.8	7.7 7.7	7.7	0.02 0.02	0.02	96.8 96.8	96.8	7.7 7.7	7.7	1.5 1.5	1.5	<2.5 <2.5	<2.5
22-Jun-09	Cloudy	Calm	11:51	Middle	0.14	18.7 18.7	18.7	7.6 7.7	7.7	0.02 0.02	0.02	95.5 95.5	95.5	7.6 7.6	7.6	1.5 1.5	1.5	<2.5 <2.5	<2.5
24-Jun-09	Rainy	Calm	11:06	Middle	0.14	18.7 18.7	18.7	7.7 7.7	7.7	0.02 0.02	0.02	96.2 96.2	96.2	7.7 7.7	7.7	1.6 1.6	1.6	<2.5 <2.5	<2.5
26-Jun-09	Rainy	Calm	11:35	Middle	0.14	18.7 18.7	18.7	7.7 7.7	7.7	0.02 0.02	0.02	97.3 97.3	97.3	7.7 7.7	7.7	1.5 1.5	1.5	<2.5 <2.5	<2.5
29-Jun-09	Fine	Calm	14:02	Middle	0.14	18.7 18.7	18.7	7.7 7.7	7.7	0.02 0.02	0.02	96.7 96.7	96.7	7.7 7.7	7.7	1.6 1.6	1.6	<2.5 <2.5	<2.5
30-Jun-09	Cloudy	Calm	11:47	Middle	0.14	18.7 18.7	18.7	7.7 7.7	7.7	0.02 0.02	0.02	95.0 95.0	95	7.6 7.6	7.6	1.7 1.7	1.7	<2.5 <2.5	<2.5

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: * Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher
 ** Cancelled due to Thunderstorm Warning

Water Quality Monitoring Results at 21_R

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
1-Jun-09	Sunny	Calm	12:32	Middle	0.1	18.9 18.9	18.9	7.7 7.7	7.7	0.02 0.02	0.02	96.7 96.5	96.6	7.7 7.7	7.7	2.0 1.9	2	<2.5 <2.5	<2.5
3-Jun-09	Cloudy	Calm	11:15	Middle	0.1	18.8 18.9	18.9	7.6 7.6	7.6	0.02 0.02	0.02	95.4 95.2	95.3	7.6 7.6	7.6	1.9 1.8	1.9	<2.5 <2.5	<2.5
5-Jun-09	Sunny	Calm	11:26	Middle	0.1	18.8 18.8	18.8	7.6 7.6	7.6	0.02 0.02	0.02	96.1 95.9	96	7.7 7.7	7.7	1.9 1.8	1.9	<2.5 <2.5	<2.5
8-Jun-09	Cloudy	Calm	11:53	Middle	0.1	18.8 18.9	18.9	7.7 7.7	7.7	0.02 0.02	0.02	97.3 97.1	97.2	7.7 7.7	7.7	1.8 1.7	1.8	<2.5 <2.5	<2.5
10-Jun-09	Cloudy	Calm	11:19	Middle	0.1	18.9 18.9	18.9	7.6 7.6	7.6	0.02 0.02	0.02	96.8 96.6	96.7	7.7 7.7	7.7	1.7 1.6	1.7	<2.5 <2.5	<2.5
12-Jun-09	Cloudy	Calm	11:14	Middle	0.1	18.8 18.8	18.8	7.6 7.6	7.6	0.02 0.02	0.02	96.0 95.8	95.9	7.7 7.7	7.7	1.8 1.7	1.8	<2.5 <2.5	<2.5
15-Jun-09	Cloudy	Calm	11:35	Middle	0.1	18.8 18.8	18.8	7.7 7.7	7.7	0.02 0.02	0.02	97.1 96.9	97	7.7 7.7	7.7	1.8 1.7	1.8	<2.5 <2.5	<2.5
17-Jun-09	Sunny	Calm	11:09	Middle	0.1	18.8 18.8	18.8	7.6 7.6	7.6	0.02 0.02	0.02	96.3 96.1	96.2	7.7 7.7	7.7	1.9 1.8	1.9	<2.5 <2.5	<2.5
19-Jun-09	Cloudy	Calm	11:25	Middle	0.1	18.7 18.8	18.8	7.7 7.7	7.7	0.02 0.02	0.02	97.2 97.0	97.1	7.7 7.7	7.7	1.7 1.6	1.7	<2.5 <2.5	<2.5
22-Jun-09	Cloudy	Calm	11:46	Middle	0.1	18.7 18.7	18.7	7.7 7.7	7.7	0.02 0.02	0.02	95.9 95.7	95.8	7.7 7.7	7.7	1.6 1.5	1.6	<2.5 <2.5	<2.5
24-Jun-09	Rainy	Calm	11:01	Middle	0.1	18.7 18.7	18.7	7.7 7.7	7.7	0.02 0.02	0.02	96.6 96.4	96.5	7.7 7.7	7.7	1.7 1.6	1.7	<2.5 <2.5	<2.5
26-Jun-09	Rainy	Calm	11:30	Middle	0.1	18.7 18.7	18.7	7.7 7.7	7.7	0.02 0.02	0.02	97.7 97.5	97.6	7.8 7.7	7.8	1.6 1.5	1.6	<2.5 <2.5	<2.5
29-Jun-09	Fine	Calm	13:58	Middle	0.1	18.6 18.7	18.7	7.7 7.7	7.7	0.02 0.02	0.02	97.1 96.9	97	7.7 7.7	7.7	1.7 1.6	1.7	<2.5 <2.5	<2.5
30-Jun-09	Cloudy	Calm	11:43	Middle	0.1	18.7 18.7	18.7	7.7 7.7	7.7	0.02 0.02	0.02	95.4 95.2	95.3	7.6 7.6	7.6	1.8 1.7	1.8	<2.5 <2.5	<2.5

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: * Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher
 ** Cancelled due to Thunderstorm Warning

Water Quality Monitoring Results at 23_I

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
1-Jun-09	Sunny	Calm	12:26	Middle	0.09	19.0 19.0	19	7.5 7.5	7.5	0.02 0.02	0.02	96.3 96.1	96.2	7.7 7.7	7.7	1.8 1.7	1.8	<2.5 <2.5	<2.5
3-Jun-09	Cloudy	Calm	11:08	Middle	0.09	19.0 19.0	19	7.5 7.5	7.5	0.02 0.02	0.02	95.0 94.8	94.9	7.6 7.6	7.6	1.7 1.6	1.7	<2.5 <2.5	<2.5
5-Jun-09	Sunny	Calm	11:20	Middle	0.09	19.0 19.0	19	7.5 7.5	7.5	0.02 0.02	0.02	95.7 95.5	95.6	7.6 7.6	7.6	1.7 1.6	1.7	<2.5 <2.5	<2.5
8-Jun-09	Cloudy	Calm	11:47	Middle	0.09	19.0 19.0	19	7.5 7.5	7.5	0.02 0.02	0.02	96.9 96.7	96.8	7.7 7.7	7.7	1.6 1.5	1.6	<2.5 <2.5	<2.5
10-Jun-09	Cloudy	Calm	11:13	Middle	0.09	19.0 19.0	19	7.5 7.5	7.5	0.02 0.02	0.02	96.4 96.2	96.3	7.7 7.7	7.7	1.6 1.5	1.6	<2.5 <2.5	<2.5
12-Jun-09	Cloudy	Calm	11:08	Middle	0.09	18.9 18.9	18.9	7.5 7.5	7.5	0.02 0.02	0.02	95.6 95.4	95.5	7.6 7.6	7.6	1.7 1.6	1.7	<2.5 <2.5	<2.5
15-Jun-09	Cloudy	Calm	11:29	Middle	0.09	19.0 19.0	19	7.5 7.5	7.5	0.02 0.02	0.02	96.7 96.5	96.6	7.7 7.7	7.7	1.7 1.6	1.7	<2.5 <2.5	<2.5
17-Jun-09	Sunny	Calm	11:03	Middle	0.09	18.9 18.9	18.9	7.5 7.5	7.5	0.02 0.02	0.02	95.9 95.7	95.8	7.7 7.6	7.7	1.8 1.7	1.8	<2.5 <2.5	<2.5
19-Jun-09	Cloudy	Calm	11:18	Middle	0.09	18.9 18.9	18.9	7.5 7.6	7.6	0.02 0.02	0.02	96.8 96.6	96.7	7.7 7.7	7.7	1.6 1.5	1.6	<2.5 <2.5	<2.5
22-Jun-09	Cloudy	Calm	11:40	Middle	0.09	18.9 18.9	18.9	7.5 7.5	7.5	0.02 0.02	0.02	95.5 95.3	95.4	7.6 7.6	7.6	1.6 1.5	1.6	<2.5 <2.5	<2.5
24-Jun-09	Rainy	Calm	10:55	Middle	0.09	18.8 18.8	18.8	7.6 7.6	7.6	0.02 0.02	0.02	96.2 96.0	96.1	7.7 7.7	7.7	1.7 1.6	1.7	<2.5 <2.5	<2.5
26-Jun-09	Rainy	Calm	11:24	Middle	0.09	18.9 18.9	18.9	7.6 7.6	7.6	0.02 0.02	0.02	97.3 97.1	97.2	7.7 7.7	7.7	1.5 1.4	1.5	<2.5 <2.5	<2.5
29-Jun-09	Fine	Calm	13:52	Middle	0.09	18.8 18.8	18.8	7.6 7.6	7.6	0.02 0.02	0.02	96.7 96.5	96.6	7.7 7.7	7.7	1.6 1.5	1.6	<2.5 <2.5	<2.5
30-Jun-09	Cloudy	Calm	11:37	Middle	0.09	18.8 18.8	18.8	7.6 7.6	7.6	0.02 0.02	0.02	95.0 94.8	94.9	7.6 7.6	7.6	1.7 1.6	1.7	<2.5 <2.5	<2.5

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: * Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher
 ** Cancelled due to Thunderstorm Warning

Water Quality Monitoring Results at 23_R1

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
1-Jun-09	Sunny	Calm	12:13	Middle	0.09	19.0 19.0	19	7.5 7.5	7.5	0.02 0.02	0.02	96.7 96.4	96.6	7.7 7.7	7.7	1.9 1.8	1.9	<2.5 <2.5	<2.5
3-Jun-09	Cloudy	Calm	10:55	Middle	0.09	18.9 19.0	19	7.5 7.5	7.5	0.02 0.02	0.02	95.4 95.1	95.3	7.7 7.6	7.7	1.8 1.7	1.8	<2.5 <2.5	<2.5
5-Jun-09	Sunny	Calm	11:07	Middle	0.09	18.9 18.9	18.9	7.5 7.5	7.5	0.02 0.02	0.02	96.1 95.8	96	7.7 7.7	7.7	1.8 1.7	1.8	<2.5 <2.5	<2.5
8-Jun-09	Cloudy	Calm	11:34	Middle	0.09	18.9 19.0	19	7.5 7.5	7.5	0.02 0.02	0.02	97.3 97.0	97.2	7.7 7.7	7.7	1.7 1.6	1.7	3.0 <2.5	2.8
10-Jun-09	Cloudy	Calm	11:00	Middle	0.09	18.9 19.0	19	7.5 7.5	7.5	0.02 0.02	0.02	96.8 96.5	96.7	7.7 7.7	7.7	1.7 1.6	1.7	<2.5 <2.5	<2.5
12-Jun-09	Cloudy	Calm	10:55	Middle	0.09	18.8 18.9	18.9	7.5 7.5	7.5	0.02 0.02	0.02	96.0 95.7	95.9	7.7 7.7	7.7	1.8 1.7	1.8	<2.5 <2.5	<2.5
15-Jun-09	Cloudy	Calm	11:16	Middle	0.09	18.9 18.9	18.9	7.5 7.5	7.5	0.02 0.02	0.02	97.1 96.8	97	7.7 7.7	7.7	1.8 1.7	1.8	<2.5 <2.5	<2.5
17-Jun-09	Sunny	Calm	10:50	Middle	0.09	18.9 18.9	18.9	7.5 7.5	7.5	0.02 0.02	0.02	96.3 96.0	96.2	7.7 7.7	7.7	1.9 1.8	1.9	<2.5 <2.5	<2.5
19-Jun-09	Cloudy	Calm	11:06	Middle	0.09	18.8 18.9	18.9	7.5 7.5	7.5	0.02 0.02	0.02	97.2 96.9	97.1	7.7 7.7	7.7	1.7 1.6	1.7	<2.5 <2.5	<2.5
22-Jun-09	Cloudy	Calm	11:27	Middle	0.09	18.8 18.8	18.8	7.5 7.5	7.5	0.02 0.02	0.02	95.9 95.6	95.8	7.7 7.7	7.7	1.7 1.6	1.7	<2.5 <2.5	<2.5
24-Jun-09	Rainy	Calm	10:42	Middle	0.09	18.8 18.8	18.8	7.5 7.5	7.5	0.02 0.02	0.02	96.6 96.3	96.5	7.7 7.7	7.7	1.8 1.7	1.8	<2.5 <2.5	<2.5
26-Jun-09	Rainy	Calm	11:11	Middle	0.09	18.8 18.8	18.8	7.6 7.6	7.6	0.02 0.02	0.02	97.7 97.4	97.6	7.8 7.7	7.8	1.6 1.5	1.6	<2.5 <2.5	<2.5
29-Jun-09	Fine	Calm	13:39	Middle	0.09	18.7 18.8	18.8	7.5 7.5	7.5	0.02 0.02	0.02	97.1 96.8	97	7.7 7.7	7.7	1.7 1.6	1.7	<2.5 <2.5	<2.5
30-Jun-09	Cloudy	Calm	11:24	Middle	0.09	18.8 18.8	18.8	7.6 7.6	7.6	0.02 0.02	0.02	95.4 95.1	95.3	7.7 7.6	7.7	1.8 1.7	1.8	<2.5 <2.5	<2.5

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: * Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher
 ** Cancelled due to Thunderstorm Warning

Water Quality Monitoring Results at 23_R2

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
1-Jun-09	Sunny	Calm	12:19	Middle	0.1	19.0 19.0	19	7.5 7.5	7.5	0.02 0.02	0.02	96.9 96.8	96.9	7.7 7.7	7.7	1.8 1.9	1.9	<2.5 <2.5	<2.5
3-Jun-09	Cloudy	Calm	11:01	Middle	0.1	19.0 19.0	19	7.5 7.5	7.5	0.02 0.02	0.02	95.6 95.5	95.6	7.7 7.7	7.7	1.7 1.8	1.8	<2.5 <2.5	<2.5
5-Jun-09	Sunny	Calm	11:13	Middle	0.1	18.9 18.9	18.9	7.5 7.5	7.5	0.02 0.02	0.02	96.3 96.2	96.3	7.7 7.7	7.7	1.7 1.8	1.8	<2.5 <2.5	<2.5
8-Jun-09	Cloudy	Calm	11:40	Middle	0.1	19.0 19.0	19	7.5 7.5	7.5	0.02 0.02	0.02	97.5 97.4	97.5	7.8 7.8	7.8	1.6 1.7	1.7	<2.5 <2.5	<2.5
10-Jun-09	Cloudy	Calm	11:06	Middle	0.1	19.0 19.0	19	7.5 7.5	7.5	0.02 0.02	0.02	97.0 96.9	97	7.7 7.7	7.7	1.6 1.7	1.7	<2.5 <2.5	<2.5
12-Jun-09	Cloudy	Calm	11:01	Middle	0.1	18.9 18.9	18.9	7.5 7.5	7.5	0.02 0.02	0.02	96.2 96.1	96.2	7.7 7.7	7.7	1.7 1.8	1.8	<2.5 <2.5	<2.5
15-Jun-09	Cloudy	Calm	11:22	Middle	0.1	18.9 18.9	18.9	7.5 7.5	7.5	0.02 0.02	0.02	97.3 97.2	97.3	7.8 7.7	7.8	1.7 1.8	1.8	<2.5 <2.5	<2.5
17-Jun-09	Sunny	Calm	10:56	Middle	0.1	18.9 18.9	18.9	7.5 7.5	7.5	0.02 0.02	0.02	96.5 96.4	96.5	7.7 7.7	7.7	1.8 1.9	1.9	<2.5 <2.5	<2.5
19-Jun-09	Cloudy	Calm	11:11	Middle	0.1	18.9 18.9	18.9	7.5 7.5	7.5	0.02 0.02	0.02	97.4 97.3	97.4	7.8 7.8	7.8	1.6 1.7	1.7	<2.5 <2.5	<2.5
22-Jun-09	Cloudy	Calm	11:33	Middle	0.1	18.8 18.8	18.8	7.5 7.5	7.5	0.02 0.02	0.02	96.1 96.0	96.1	7.7 7.7	7.7	1.6 1.7	1.7	<2.5 <2.5	<2.5
24-Jun-09	Rainy	Calm	10:48	Middle	0.1	18.8 18.8	18.8	7.5 7.5	7.5	0.02 0.02	0.02	96.8 96.7	96.8	7.7 7.7	7.7	1.7 1.8	1.8	<2.5 <2.5	<2.5
26-Jun-09	Rainy	Calm	11:17	Middle	0.1	18.8 18.8	18.8	7.6 7.6	7.6	0.02 0.02	0.02	97.9 97.8	97.9	7.8 7.8	7.8	1.5 1.6	1.6	<2.5 <2.5	<2.5
29-Jun-09	Fine	Calm	13:45	Middle	0.1	18.8 18.8	18.8	7.6 7.6	7.6	0.02 0.02	0.02	97.3 97.2	97.3	7.8 7.7	7.8	1.6 1.7	1.7	<2.5 <2.5	<2.5
30-Jun-09	Cloudy	Calm	11:30	Middle	0.1	18.8 18.8	18.8	7.6 7.6	7.6	0.02 0.02	0.02	95.6 95.5	95.6	7.7 7.7	7.7	1.7 1.8	1.8	<2.5 <2.5	<2.5

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: * Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher
 ** Cancelled due to Thunderstorm Warning

Water Quality Monitoring Results at 26_I

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
1-Jun-09	Sunny	Calm	11:39	Middle	0.14	18.9 18.9	18.9	7.8 7.8	7.8	0.03 0.03	0.03	97.0 96.9	97	7.7 7.7	7.7	1.8 1.7	1.8	<2.5 <2.5	<2.5
3-Jun-09	Cloudy	Calm	10:21	Middle	0.14	18.9 18.9	18.9	7.7 7.7	7.7	0.03 0.03	0.03	95.7 95.6	95.7	7.7 7.6	7.7	1.8 1.7	1.8	<2.5 <2.5	<2.5
5-Jun-09	Sunny	Calm	10:33	Middle	0.14	18.9 18.9	18.9	7.7 7.7	7.7	0.03 0.03	0.03	96.4 96.3	96.4	7.7 7.7	7.7	1.8 1.7	1.8	<2.5 <2.5	<2.5
8-Jun-09	Cloudy	Calm	10:59	Middle	0.14	18.9 18.9	18.9	7.8 7.8	7.8	0.03 0.03	0.03	97.6 97.5	97.6	7.7 7.7	7.7	1.7 1.6	1.7	<2.5 <2.5	<2.5
10-Jun-09	Cloudy	Calm	10:25	Middle	0.14	18.9 18.9	18.9	7.7 7.7	7.7	0.03 0.03	0.03	97.1 97.0	97.1	7.7 7.7	7.7	1.7 1.6	1.7	<2.5 <2.5	<2.5
12-Jun-09	Cloudy	Calm	10:20	Middle	0.14	18.8 18.8	18.8	7.7 7.7	7.7	0.03 0.03	0.03	96.3 96.2	96.3	7.7 7.7	7.7	1.8 1.7	1.8	<2.5 <2.5	<2.5
15-Jun-09	Cloudy	Calm	10:42	Middle	0.14	18.9 18.9	18.9	7.8 7.8	7.8	0.03 0.03	0.03	97.4 97.3	97.4	7.7 7.7	7.7	1.7 1.6	1.7	<2.5 <2.5	<2.5
17-Jun-09	Sunny	Calm	10:15	Middle	0.14	18.8 18.8	18.8	7.7 7.7	7.7	0.03 0.03	0.03	96.6 96.5	96.6	7.7 7.7	7.7	1.8 1.7	1.8	<2.5 <2.5	<2.5
19-Jun-09	Cloudy	Calm	10:31	Middle	0.14	18.8 18.8	18.8	7.8 7.8	7.8	0.03 0.03	0.03	97.5 97.4	97.5	7.7 7.7	7.7	1.7 1.6	1.7	<2.5 <2.5	<2.5
22-Jun-09	Cloudy	Calm	10:53	Middle	0.14	18.8 18.8	18.8	7.8 7.8	7.8	0.03 0.03	0.03	96.2 96.1	96.2	7.7 7.7	7.7	1.6 1.5	1.6	<2.5 <2.5	<2.5
24-Jun-09	Rainy	Calm	10:08	Middle	0.14	18.7 18.7	18.7	7.8 7.8	7.8	0.03 0.03	0.03	96.9 96.8	96.9	7.7 7.7	7.7	1.7 1.6	1.7	<2.5 <2.5	<2.5
26-Jun-09	Rainy	Calm	10:37	Middle	0.14	18.8 18.8	18.8	7.8 7.8	7.8	0.03 0.03	0.03	98.0 97.9	98	7.8 7.7	7.8	1.6 1.5	1.6	<2.5 <2.5	<2.5
29-Jun-09	Fine	Calm	13:04	Middle	0.14	18.7 18.7	18.7	7.8 7.8	7.8	0.03 0.03	0.03	97.4 97.3	97.4	7.7 7.7	7.7	1.7 1.6	1.7	<2.5 <2.5	<2.5
30-Jun-09	Cloudy	Calm	10:49	Middle	0.14	18.7 18.7	18.7	7.8 7.8	7.8	0.03 0.03	0.03	95.7 95.6	95.7	7.7 7.6	7.7	1.7 1.6	1.7	<2.5 <2.5	<2.5

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: * Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher
 ** Cancelled due to Thunderstorm Warning

Water Quality Monitoring Results at 26_R

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
1-Jun-09	Sunny	Calm	12:03	Middle	0.09	19.0 19.0	19	7.7 7.7	7.7	0.02 0.02	0.02	96.9 96.7	96.8	7.7 7.7	7.7	1.9 1.8	1.9	<2.5 <2.5	<2.5
3-Jun-09	Cloudy	Calm	10:45	Middle	0.09	19.0 19.0	19	7.7 7.7	7.7	0.02 0.02	0.02	95.6 95.4	95.5	7.7 7.6	7.7	1.9 1.8	1.9	<2.5 <2.5	<2.5
5-Jun-09	Sunny	Calm	10:57	Middle	0.09	19.0 19.0	19	7.6 7.6	7.6	0.02 0.02	0.02	96.3 96.1	96.2	7.7 7.7	7.7	1.8 1.7	1.8	<2.5 <2.5	<2.5
8-Jun-09	Cloudy	Calm	11:23	Middle	0.09	19.0 19.0	19	7.7 7.7	7.7	0.02 0.02	0.02	97.5 97.3	97.4	7.8 7.7	7.8	1.7 1.6	1.7	<2.5 <2.5	<2.5
10-Jun-09	Cloudy	Calm	10:50	Middle	0.09	19.0 19.0	19	7.7 7.7	7.7	0.02 0.02	0.02	97.0 96.8	96.9	7.7 7.7	7.7	1.7 1.7	1.7	<2.5 <2.5	<2.5
12-Jun-09	Cloudy	Calm	10:45	Middle	0.09	18.9 18.9	18.9	7.6 7.6	7.6	0.02 0.02	0.02	96.2 96.0	96.1	7.7 7.7	7.7	1.8 1.7	1.8	<2.5 <2.5	<2.5
15-Jun-09	Cloudy	Calm	11:06	Middle	0.09	19.0 19.0	19	7.7 7.7	7.7	0.02 0.02	0.02	97.3 97.1	97.2	7.7 7.7	7.7	1.8 1.7	1.8	<2.5 <2.5	<2.5
17-Jun-09	Sunny	Calm	10:40	Middle	0.09	18.9 18.9	18.9	7.6 7.6	7.6	0.02 0.02	0.02	96.5 96.3	96.4	7.7 7.7	7.7	1.9 1.8	1.9	<2.5 <2.5	<2.5
19-Jun-09	Cloudy	Calm	10:55	Middle	0.09	18.9 18.9	18.9	7.7 7.7	7.7	0.02 0.02	0.02	97.4 97.2	97.3	7.8 7.7	7.8	1.8 1.7	1.8	<2.5 <2.5	<2.5
22-Jun-09	Cloudy	Calm	11:17	Middle	0.09	18.9 18.9	18.9	7.7 7.7	7.7	0.02 0.02	0.02	96.1 95.9	96	7.7 7.7	7.7	1.7 1.7	1.7	<2.5 <2.5	<2.5
24-Jun-09	Rainy	Calm	10:32	Middle	0.09	18.8 18.9	18.9	7.7 7.7	7.7	0.02 0.02	0.02	96.8 96.6	96.7	7.7 7.7	7.7	1.8 1.7	1.8	<2.5 <2.5	<2.5
26-Jun-09	Rainy	Calm	11:01	Middle	0.09	18.9 18.9	18.9	7.7 7.7	7.7	0.02 0.02	0.02	97.9 97.7	97.8	7.8 7.8	7.8	1.7 1.6	1.7	<2.5 <2.5	<2.5
29-Jun-09	Fine	Calm	13:29	Middle	0.09	18.8 18.8	18.8	7.7 7.7	7.7	0.02 0.02	0.02	97.3 97.1	97.2	7.7 7.7	7.7	1.8 1.7	1.8	<2.5 <2.5	<2.5
30-Jun-09	Cloudy	Calm	11:14	Middle	0.09	18.8 18.9	18.9	7.7 7.7	7.7	0.02 0.02	0.02	95.6 95.4	95.5	7.7 7.6	7.7	1.8 1.7	1.8	<2.5 <2.5	<2.5

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: * Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher
 ** Cancelled due to Thunderstorm Warning

Water Quality Monitoring Results at 27_I

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
1-Jun-09	Sunny	Calm	11:57	Middle	0.08	18.9 19.0	19	7.7 7.7	7.7	0.02 0.02	0.02	96.9 96.7	96.8	7.7 7.7	7.7	1.8 1.9	1.9	<2.5 <2.5	<2.5
3-Jun-09	Cloudy	Calm	10:39	Middle	0.08	18.9 18.9	18.9	7.7 7.7	7.7	0.02 0.02	0.02	95.6 95.4	95.5	7.7 7.6	7.7	1.8 1.9	1.9	<2.5 <2.5	<2.5
5-Jun-09	Sunny	Calm	10:51	Middle	0.08	18.9 18.9	18.9	7.7 7.6	7.7	0.02 0.02	0.02	96.3 96.1	96.2	7.7 7.7	7.7	1.8 1.9	1.9	<2.5 <2.5	<2.5
8-Jun-09	Cloudy	Calm	11:17	Middle	0.08	18.9 18.9	18.9	7.7 7.7	7.7	0.02 0.02	0.02	97.5 97.3	97.4	7.7 7.7	7.7	1.7 1.8	1.8	<2.5 <2.5	<2.5
10-Jun-09	Cloudy	Calm	10:44	Middle	0.08	18.9 19.0	19	7.7 7.7	7.7	0.02 0.02	0.02	97.0 96.8	96.9	7.7 7.7	7.7	1.7 1.8	1.8	<2.5 <2.5	<2.5
12-Jun-09	Cloudy	Calm	10:39	Middle	0.08	18.8 18.9	18.9	7.7 7.6	7.7	0.02 0.02	0.02	96.2 96.0	96.1	7.7 7.7	7.7	1.8 1.9	1.9	<2.5 <2.5	<2.5
15-Jun-09	Cloudy	Calm	11:00	Middle	0.08	18.9 18.9	18.9	7.7 7.7	7.7	0.02 0.02	0.02	97.3 97.1	97.2	7.7 7.7	7.7	1.7 1.8	1.8	<2.5 <2.5	<2.5
17-Jun-09	Sunny	Calm	10:33	Middle	0.08	18.8 18.9	18.9	7.7 7.7	7.7	0.02 0.02	0.02	96.5 96.3	96.4	7.7 7.7	7.7	1.8 1.9	1.9	<2.5 <2.5	<2.5
19-Jun-09	Cloudy	Calm	10:49	Middle	0.08	18.8 18.8	18.8	7.7 7.7	7.7	0.02 0.02	0.02	97.4 97.2	97.3	7.7 7.7	7.7	1.7 1.8	1.8	<2.5 <2.5	<2.5
22-Jun-09	Cloudy	Calm	11:11	Middle	0.08	18.8 18.8	18.8	7.7 7.7	7.7	0.02 0.02	0.02	96.1 95.9	96	7.7 7.7	7.7	1.6 1.7	1.7	<2.5 <2.5	<2.5
24-Jun-09	Rainy	Calm	10:26	Middle	0.08	18.8 18.8	18.8	7.7 7.7	7.7	0.02 0.02	0.02	96.8 96.6	96.7	7.7 7.7	7.7	1.6 1.7	1.7	<2.5 <2.5	<2.5
26-Jun-09	Rainy	Calm	10:55	Middle	0.08	18.8 18.8	18.8	7.8 7.8	7.8	0.02 0.02	0.02	97.9 97.7	97.8	7.8 7.8	7.8	1.5 1.6	1.6	<2.5 <2.5	<2.5
29-Jun-09	Fine	Calm	13:22	Middle	0.08	18.7 18.7	18.7	7.7 7.7	7.7	0.02 0.02	0.02	97.3 97.1	97.2	7.7 7.7	7.7	1.6 1.7	1.7	<2.5 <2.5	<2.5
30-Jun-09	Cloudy	Calm	11:07	Middle	0.08	18.8 18.8	18.8	7.8 7.8	7.8	0.02 0.02	0.02	95.6 95.4	95.5	7.7 7.6	7.7	1.6 1.7	1.7	<2.5 <2.5	<2.5

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: * Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher
 ** Cancelled due to Thunderstorm Warning

Water Quality Monitoring Results at 27_R

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
1-Jun-09	Sunny	Calm	11:47	Middle	0.13	18.9 18.9	18.9	7.7 7.7	7.7	0.02 0.02	0.02	97.8 97.5	97.7	7.8 7.8	7.8	1.9 1.9	1.9	<2.5 <2.5	<2.5
3-Jun-09	Cloudy	Calm	10:29	Middle	0.13	18.9 18.9	18.9	7.7 7.7	7.7	0.02 0.02	0.02	96.5 96.2	96.4	7.8 7.7	7.8	1.9 1.9	1.9	<2.5 <2.5	<2.5
5-Jun-09	Sunny	Calm	10:41	Middle	0.13	18.9 18.9	18.9	7.7 7.7	7.7	0.02 0.02	0.02	97.2 96.9	97.1	7.8 7.8	7.8	1.9 1.9	1.9	<2.5 <2.5	<2.5
8-Jun-09	Cloudy	Calm	11:08	Middle	0.13	18.9 18.9	18.9	7.7 7.7	7.7	0.02 0.02	0.02	98.4 98.1	98.3	7.8 7.8	7.8	1.8 1.8	1.8	3.0 <2.5	2.8
10-Jun-09	Cloudy	Calm	10:34	Middle	0.13	18.9 18.9	18.9	7.7 7.7	7.7	0.02 0.02	0.02	97.9 97.6	97.8	7.8 7.8	7.8	1.8 1.8	1.8	<2.5 <2.5	<2.5
12-Jun-09	Cloudy	Calm	10:29	Middle	0.13	18.8 18.8	18.8	7.7 7.7	7.7	0.02 0.02	0.02	97.1 96.8	97	7.8 7.8	7.8	1.9 1.9	1.9	<2.5 <2.5	<2.5
15-Jun-09	Cloudy	Calm	10:50	Middle	0.13	18.9 18.9	18.9	7.7 7.7	7.7	0.02 0.02	0.02	98.2 97.9	98.1	7.8 7.8	7.8	1.8 1.8	1.8	<2.5 <2.5	<2.5
17-Jun-09	Sunny	Calm	10:24	Middle	0.13	18.8 18.8	18.8	7.7 7.7	7.7	0.02 0.02	0.02	97.4 97.1	97.3	7.8 7.8	7.8	1.9 1.9	1.9	<2.5 <2.5	<2.5
19-Jun-09	Cloudy	Calm	10:39	Middle	0.13	18.8 18.8	18.8	7.7 7.7	7.7	0.02 0.02	0.02	98.3 98.0	98.2	7.8 7.8	7.8	1.8 1.8	1.8	<2.5 <2.5	<2.5
22-Jun-09	Cloudy	Calm	11:01	Middle	0.13	18.8 18.8	18.8	7.7 7.7	7.7	0.02 0.02	0.02	97.0 96.7	96.9	7.8 7.8	7.8	1.7 1.7	1.7	<2.5 <2.5	<2.5
24-Jun-09	Rainy	Calm	10:16	Middle	0.13	18.7 18.7	18.7	7.7 7.7	7.7	0.02 0.02	0.02	97.7 97.4	97.6	7.8 7.8	7.8	1.7 1.7	1.7	<2.5 <2.5	<2.5
26-Jun-09	Rainy	Calm	10:45	Middle	0.13	18.8 18.8	18.8	7.8 7.8	7.8	0.02 0.02	0.02	98.8 98.5	98.7	7.9 7.8	7.9	1.6 1.6	1.6	<2.5 <2.5	<2.5
29-Jun-09	Fine	Calm	13:13	Middle	0.13	18.7 18.7	18.7	7.7 7.7	7.7	0.02 0.02	0.02	98.2 97.9	98.1	7.8 7.8	7.8	1.7 1.7	1.7	<2.5 <2.5	<2.5
30-Jun-09	Cloudy	Calm	10:58	Middle	0.13	18.7 18.7	18.7	7.8 7.8	7.8	0.02 0.02	0.02	96.5 96.2	96.4	7.8 7.7	7.8	1.7 1.7	1.7	<2.5 <2.5	<2.5

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: * Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher
 ** Cancelled due to Thunderstorm Warning

Water Quality Monitoring Results at 40_I

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
1-Jun-09	Sunny	Calm	11:19	Middle	0.09	19.2 19.2	19.2	7.7 7.7	7.7	0.06 0.06	0.06	97.7 97.5	97.6	7.7 7.7	7.7	2.2 2.2	2.2	<2.5 <2.5	<2.5
3-Jun-09	Cloudy	Calm	10:01	Middle	0.09	19.1 19.1	19.1	7.7 7.7	7.7	0.06 0.06	0.06	96.4 96.2	96.3	7.6 7.6	7.6	2.1 2.1	2.1	<2.5 <2.5	<2.5
5-Jun-09	Sunny	Calm	10:13	Middle	0.09	19.1 19.1	19.1	7.6 7.6	7.6	0.05 0.05	0.05	97.1 96.9	97	7.6 7.6	7.6	2.0 2.0	2	<2.5 <2.5	<2.5
8-Jun-09	Cloudy	Calm	10:39	Middle	0.09	19.1 19.1	19.1	7.7 7.7	7.7	0.05 0.05	0.05	98.3 98.1	98.2	7.7 7.7	7.7	1.9 1.9	1.9	<2.5 <2.5	<2.5
10-Jun-09	Cloudy	Calm	10:06	Middle	0.09	19.1 19.2	19.2	7.7 7.7	7.7	0.05 0.05	0.05	97.8 97.6	97.7	7.7 7.7	7.7	2.0 2.0	2	<2.5 <2.5	<2.5
12-Jun-09	Cloudy	Calm	10:01	Middle	0.09	19.0 19.1	19.1	7.6 7.6	7.6	0.05 0.05	0.05	97.0 96.8	96.9	7.6 7.6	7.6	2.1 2.1	2.1	<2.5 <2.5	<2.5
15-Jun-09	Cloudy	Calm	10:22	Middle	0.09	19.1 19.1	19.1	7.7 7.7	7.7	0.05 0.05	0.05	98.1 97.9	98	7.7 7.7	7.7	2.1 2.1	2.1	<2.5 <2.5	<2.5
17-Jun-09	Sunny	Calm	9:55	Middle	0.09	19.1 19.1	19.1	7.7 7.6	7.7	0.05 0.05	0.05	97.3 97.1	97.2	7.7 7.6	7.7	2.2 2.2	2.2	<2.5 <2.5	<2.5
19-Jun-09	Cloudy	Calm	10:11	Middle	0.09	19.0 19.0	19	7.7 7.7	7.7	0.05 0.05	0.05	98.2 98.0	98.1	7.7 7.7	7.7	2.2 2.2	2.2	<2.5 <2.5	<2.5
22-Jun-09	Cloudy	Calm	10:33	Middle	0.09	19.0 19.0	19	7.7 7.7	7.7	0.05 0.05	0.05	96.9 96.7	96.8	7.6 7.6	7.6	2.1 2.1	2.1	<2.5 <2.5	<2.5
24-Jun-09	Rainy	Calm	9:48	Middle	0.09	19.0 19.0	19	7.7 7.7	7.7	0.05 0.05	0.05	97.6 97.4	97.5	7.7 7.7	7.7	2.1 2.1	2.1	<2.5 <2.5	<2.5
26-Jun-09	Rainy	Calm	10:17	Middle	0.09	19.0 19.0	19	7.8 7.7	7.8	0.05 0.05	0.05	98.7 98.5	98.6	7.7 7.7	7.7	2.0 2.0	2	<2.5 <2.5	<2.5
29-Jun-09	Fine	Calm	12:45	Middle	0.09	18.9 18.9	18.9	7.7 7.7	7.7	0.05 0.05	0.05	98.1 97.9	98	7.7 7.7	7.7	2.1 2.1	2.1	<2.5 <2.5	<2.5
30-Jun-09	Cloudy	Calm	10:29	Middle	0.09	19.0 19.0	19	7.8 7.7	7.8	0.05 0.05	0.05	96.4 96.2	96.3	7.6 7.6	7.6	2.2 2.2	2.2	<2.5 <2.5	<2.5

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: * Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher
 ** Cancelled due to Thunderstorm Warning

Water Quality Monitoring Results at 40_R

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
1-Jun-09	Sunny	Calm	11:14	Middle	0.2	19.2	19.2	7.8	7.8	0.06	0.06	98.2	98.2	7.7	7.7	2.1	2.2	<2.5	<2.5
						19.2		7.8		0.06		98.2		7.7		2.2		<2.5	
3-Jun-09	Cloudy	Calm	9:56	Middle	0.2	19.1	19.1	7.8	7.8	0.06	0.06	96.9	96.9	7.7	7.7	2.1	2.1	<2.5	<2.5
						19.1		7.7		0.06		96.9		7.7		2.1		<2.5	
5-Jun-09	Sunny	Calm	10:07	Middle	0.2	19.1	19.1	7.7	7.7	0.05	0.05	97.6	97.6	7.7	7.7	2.1	2.1	<2.5	<2.5
						19.1		7.7		0.05		97.6		7.7		2.0		<2.5	
8-Jun-09	Cloudy	Calm	10:34	Middle	0.2	19.1	19.1	7.8	7.8	0.05	0.05	98.8	98.8	7.8	7.8	2.0	2	<2.5	<2.5
						19.1		7.8		0.05		98.8		7.8		1.9		<2.5	
10-Jun-09	Cloudy	Calm	10:00	Middle	0.2	19.1	19.1	7.8	7.8	0.05	0.05	98.3	98.3	7.7	7.7	2.0	2	<2.5	<2.5
						19.1		7.7		0.05		98.3		7.7		1.9		<2.5	
12-Jun-09	Cloudy	Calm	9:55	Middle	0.2	19.0	19	7.7	7.7	0.05	0.05	97.5	97.5	7.7	7.7	2.1	2.1	<2.5	<2.5
						19.0		7.7		0.05		97.5		7.7		2.0		<2.5	
15-Jun-09	Cloudy	Calm	10:17	Middle	0.2	19.1	19.1	7.8	7.8	0.05	0.05	98.6	98.6	7.8	7.8	2.1	2.1	<2.5	<2.5
						19.1		7.8		0.05		98.6		7.8		2.1		<2.5	
17-Jun-09	Sunny	Calm	9:50	Middle	0.2	19.1	19.1	7.7	7.7	0.05	0.05	97.8	97.8	7.7	7.7	2.2	2.2	7.0	6.5
						19.1		7.7		0.05		97.8		7.7		2.2		6.0	
19-Jun-09	Cloudy	Calm	10:06	Middle	0.2	19.0	19	7.8	7.8	0.05	0.05	98.7	98.7	7.8	7.8	2.2	2.2	<2.5	<2.5
						19.0		7.8		0.05		98.7		7.8		2.1		<2.5	
22-Jun-09	Cloudy	Calm	10:27	Middle	0.2	19.0	19	7.8	7.8	0.05	0.05	97.4	97.4	7.7	7.7	2.1	2.1	<2.5	<2.5
						19.0		7.8		0.05		97.4		7.7		2.0		<2.5	
24-Jun-09	Rainy	Calm	9:43	Middle	0.2	19.0	19	7.8	7.8	0.05	0.05	98.1	98.1	7.7	7.7	2.1	2.1	<2.5	<2.5
						19.0		7.8		0.05		98.1		7.7		2.0		<2.5	
26-Jun-09	Rainy	Calm	10:12	Middle	0.2	19.0	19	7.8	7.8	0.05	0.05	99.2	99.2	7.8	7.8	2.0	2	<2.5	<2.5
						19.0		7.8		0.05		99.2		7.8		1.9		<2.5	
29-Jun-09	Fine	Calm	12:39	Middle	0.2	18.9	18.9	7.8	7.8	0.05	0.05	98.6	98.6	7.8	7.8	2.1	2.1	<2.5	<2.5
						18.9		7.8		0.05		98.6		7.8		2.0		<2.5	
30-Jun-09	Cloudy	Calm	10:24	Middle	0.2	19.0	19	7.8	7.8	0.05	0.05	96.9	96.9	7.7	7.7	2.2	2.2	<2.5	<2.5
						19.0		7.8		0.05		96.9		7.7		2.1		<2.5	

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: * Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher
 ** Cancelled due to Thunderstorm Warning

Water Quality Monitoring Results at CSS_I

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
1-Jun-09	Sunny	Calm	11:26	Middle	0.19	19.0 19.0	19	7.7 7.7	7.7	0.03 0.03	0.03	97.9 97.9	97.9	7.8 7.7	7.8	2.1 2.2	2.2	<2.5 <2.5	<2.5
3-Jun-09	Cloudy	Calm	10:08	Middle	0.19	19.0 19.0	19	7.7 7.7	7.7	0.03 0.03	0.03	96.6 96.6	96.6	7.7 7.7	7.7	2.0 2.1	2.1	<2.5 <2.5	<2.5
5-Jun-09	Sunny	Calm	10:19	Middle	0.19	19.0 19.0	19	7.7 7.7	7.7	0.03 0.03	0.03	97.3 97.3	97.3	7.7 7.7	7.7	2.0 2.1	2.1	<2.5 <2.5	<2.5
8-Jun-09	Cloudy	Calm	10:46	Middle	0.19	19.0 19.0	19	7.7 7.7	7.7	0.03 0.03	0.03	98.5 98.5	98.5	7.8 7.8	7.8	1.9 2.0	2	<2.5 <2.5	<2.5
10-Jun-09	Cloudy	Calm	10:12	Middle	0.19	19.0 19.0	19	7.7 7.7	7.7	0.03 0.03	0.03	98.0 98.0	98	7.8 7.8	7.8	2.0 2.0	2	<2.5 <2.5	<2.5
12-Jun-09	Cloudy	Calm	10:07	Middle	0.19	18.9 18.9	18.9	7.7 7.7	7.7	0.03 0.03	0.03	97.2 97.2	97.2	7.7 7.7	7.7	2.0 2.1	2.1	<2.5 <2.5	<2.5
15-Jun-09	Cloudy	Calm	10:28	Middle	0.19	18.9 19.0	19	7.7 7.7	7.7	0.03 0.03	0.03	98.3 98.3	98.3	7.8 7.8	7.8	2.0 2.0	2	<2.5 <2.5	<2.5
17-Jun-09	Sunny	Calm	10:02	Middle	0.19	18.9 18.9	18.9	7.7 7.7	7.7	0.03 0.03	0.03	97.5 97.5	97.5	7.7 7.7	7.7	2.1 2.2	2.2	<2.5 <2.5	<2.5
19-Jun-09	Cloudy	Calm	10:18	Middle	0.19	18.9 18.9	18.9	7.7 7.7	7.7	0.03 0.03	0.03	98.4 98.4	98.4	7.8 7.8	7.8	2.0 2.1	2.1	<2.5 <2.5	<2.5
22-Jun-09	Cloudy	Calm	10:39	Middle	0.19	18.8 18.8	18.8	7.7 7.7	7.7	0.03 0.03	0.03	97.1 97.1	97.1	7.7 7.7	7.7	2.0 2.0	2	<2.5 <2.5	<2.5
24-Jun-09	Rainy	Calm	9:55	Middle	0.19	18.8 18.8	18.8	7.7 7.7	7.7	0.03 0.03	0.03	97.8 97.8	97.8	7.8 7.7	7.8	2.0 2.0	2	<2.5 <2.5	<2.5
26-Jun-09	Rainy	Calm	10:24	Middle	0.19	18.8 18.8	18.8	7.8 7.8	7.8	0.03 0.03	0.03	98.9 98.9	98.9	7.8 7.8	7.8	1.9 1.9	1.9	<2.5 <2.5	<2.5
29-Jun-09	Fine	Calm	12:51	Middle	0.19	18.8 18.8	18.8	7.7 7.7	7.7	0.03 0.03	0.03	98.3 98.3	98.3	7.8 7.8	7.8	2.0 2.0	2	<2.5 <2.5	<2.5
30-Jun-09	Cloudy	Calm	10:36	Middle	0.19	18.8 18.8	18.8	7.8 7.8	7.8	0.03 0.03	0.03	96.6 96.6	96.6	7.7 7.7	7.7	2.1 2.1	2.1	<2.5 <2.5	<2.5

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: * Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher
 ** Cancelled due to Thunderstorm Warning

Water Quality Monitoring Results at TCB_I

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
1-Jun-09	Sunny	Calm	13:29	Middle	0.35	21.2 21.2	21.2	7.4 7.4	7.4	9.04 9.01	9.03	96.0 95.8	95.9	7.4 7.4	7.4	3.2 3.1	3.2	<2.5 <2.5	<2.5
3-Jun-09	Cloudy	Calm	12:11	Middle	0.35	21.1 21.1	21.1	7.4 7.4	7.4	9.01 8.98	9	94.7 94.5	94.6	7.4 7.4	7.4	3.4 3.3	3.4	<2.5 <2.5	<2.5
5-Jun-09	Sunny	Calm	12:23	Middle	0.35	21.1 21.1	21.1	7.4 7.4	7.4	8.98 8.95	8.97	95.4 95.2	95.3	7.4 7.4	7.4	3.4 3.4	3.4	<2.5 <2.5	<2.5
8-Jun-09	Cloudy	Calm	12:49	Middle	0.35	21.1 21.1	21.1	7.4 7.4	7.4	9.06 9.03	9.05	96.6 96.4	96.5	7.5 7.5	7.5	3.2 3.2	3.2	<2.5 <2.5	<2.5
10-Jun-09	Cloudy	Calm	12:15	Middle	0.35	21.2 21.2	21.2	7.4 7.4	7.4	9.09 9.06	9.08	96.1 95.9	96	7.4 7.4	7.4	3.1 3.1	3.1	<2.5 <2.5	<2.5
12-Jun-09	Cloudy	Calm	12:10	Middle	0.35	21.1 21.1	21.1	7.4 7.4	7.4	9.05 9.02	9.04	95.3 95.1	95.2	7.4 7.4	7.4	3.3 3.3	3.3	<2.5 <2.5	<2.5
15-Jun-09	Cloudy	Calm	12:32	Middle	0.35	21.1 21.1	21.1	7.4 7.4	7.4	9.02 8.99	9.01	96.4 96.2	96.3	7.5 7.4	7.5	3.0 3.1	3.1	<2.5 <2.5	<2.5
17-Jun-09	Sunny	Calm	12:05	Middle	0.35	21.1 21.1	21.1	7.4 7.4	7.4	8.99 8.96	8.98	95.6 95.4	95.5	7.4 7.4	7.4	3.2 3.3	3.3	<2.5 <2.5	<2.5
19-Jun-09	Cloudy	Calm	12:21	Middle	0.35	21.0 21.0	21	7.4 7.4	7.4	9.03 9.00	9.02	96.5 96.3	96.4	7.5 7.5	7.5	3.0 3.1	3.1	<2.5 <2.5	<2.5
22-Jun-09	Cloudy	Calm	12:43	Middle	0.35	21.0 21.0	21	7.4 7.4	7.4	9.05 9.02	9.04	95.2 95.0	95.1	7.4 7.4	7.4	2.8 2.9	2.9	<2.5 <2.5	<2.5
24-Jun-09	Rainy	Calm	11:58	Middle	0.35	21.0 21.0	21	7.5 7.5	7.5	9.12 9.09	9.11	95.9 95.7	95.8	7.4 7.4	7.4	3.2 3.3	3.3	<2.5 <2.5	<2.5
26-Jun-09	Rainy	Calm	12:27	Middle	0.35	21.0 21.0	21	7.5 7.5	7.5	9.24 9.21	9.23	97.0 96.8	96.9	7.5 7.5	7.5	3.5 3.5	3.5	<2.5 <2.5	<2.5
29-Jun-09	Fine	Calm	14:54	Middle	0.35	20.9 20.9	20.9	7.5 7.5	7.5	9.16 9.13	9.15	96.4 96.2	96.3	7.5 7.4	7.5	3.4 3.4	3.4	<2.5 <2.5	<2.5
30-Jun-09	Cloudy	Calm	12:39	Middle	0.35	21.0 21.0	21	7.5 7.5	7.5	9.24 9.21	9.23	94.7 94.5	94.6	7.4 7.4	7.4	3.7 3.6	3.7	<2.5 <2.5	<2.5

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: * Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher
 ** Cancelled due to Thunderstorm Warning

Water Quality Monitoring Results at TCB_R

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
1-Jun-09	Sunny	Calm	13:24	Middle	0.2	21.2 21.2	21.2	7.2 7.2	7.2	19.08 19.10	19.09	97.6 97.5	97.6	7.4 7.4	7.4	4.4 4.3	4.4	<2.5 <2.5	<2.5
3-Jun-09	Cloudy	Calm	12:06	Middle	0.2	21.2 21.2	21.2	7.2 7.2	7.2	19.05 19.07	19.06	96.3 96.2	96.3	7.3 7.3	7.3	4.5 4.4	4.5	<2.5 <2.5	<2.5
5-Jun-09	Sunny	Calm	12:18	Middle	0.2	21.2 21.2	21.2	7.2 7.2	7.2	19.02 19.04	19.03	97.0 96.9	97	7.4 7.4	7.4	4.4 4.3	4.4	<2.5 <2.5	<2.5
8-Jun-09	Cloudy	Calm	12:44	Middle	0.2	21.2 21.2	21.2	7.2 7.2	7.2	19.10 19.12	19.11	98.2 98.1	98.2	7.4 7.4	7.4	4.2 4.1	4.2	<2.5 <2.5	<2.5
10-Jun-09	Cloudy	Calm	12:10	Middle	0.2	21.2 21.2	21.2	7.2 7.2	7.2	19.13 19.15	19.14	97.7 97.6	97.7	7.4 7.4	7.4	4.0 3.9	4	<2.5 <2.5	<2.5
12-Jun-09	Cloudy	Calm	12:05	Middle	0.2	21.1 21.1	21.1	7.2 7.2	7.2	19.09 19.11	19.1	96.9 96.8	96.9	7.4 7.4	7.4	4.1 4.0	4.1	<2.5 <2.5	<2.5
15-Jun-09	Cloudy	Calm	12:27	Middle	0.2	21.2 21.2	21.2	7.2 7.2	7.2	19.03 19.05	19.04	98.0 97.9	98	7.4 7.4	7.4	3.8 3.7	3.8	<2.5 <2.5	<2.5
17-Jun-09	Sunny	Calm	12:00	Middle	0.2	21.1 21.1	21.1	7.2 7.2	7.2	19.00 19.02	19.01	97.2 97.1	97.2	7.4 7.4	7.4	4.1 4.0	4.1	<2.5 <2.5	<2.5
19-Jun-09	Cloudy	Calm	12:16	Middle	0.2	21.1 21.1	21.1	7.2 7.2	7.2	19.02 19.04	19.03	98.1 98.0	98.1	7.4 7.4	7.4	4.0 3.9	4	<2.5 <2.5	<2.5
22-Jun-09	Cloudy	Calm	12:38	Middle	0.2	21.1 21.1	21.1	7.2 7.2	7.2	19.04 19.06	19.05	96.8 96.7	96.8	7.4 7.4	7.4	3.9 3.8	3.9	<2.5 <2.5	<2.5
24-Jun-09	Rainy	Calm	11:53	Middle	0.2	21.0 21.1	21.1	7.2 7.2	7.2	19.11 19.13	19.12	97.5 97.4	97.5	7.4 7.4	7.4	4.1 4.0	4.1	<2.5 <2.5	<2.5
26-Jun-09	Rainy	Calm	12:22	Middle	0.2	21.1 21.1	21.1	7.3 7.3	7.3	19.15 19.17	19.16	98.6 98.5	98.6	7.4 7.4	7.4	4.3 4.3	4.3	<2.5 <2.5	<2.5
29-Jun-09	Fine	Calm	14:49	Middle	0.2	21.0 21.0	21	7.2 7.3	7.3	19.07 19.09	19.08	98.0 97.9	98	7.4 7.4	7.4	4.1 4.1	4.1	<2.5 <2.5	<2.5
30-Jun-09	Cloudy	Calm	12:34	Middle	0.2	21.0 21.1	21.1	7.3 7.3	7.3	19.15 19.17	19.16	96.3 96.2	96.3	7.3 7.3	7.3	4.3 4.4	4.4	<2.5 <2.5	<2.5

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.

Remarks: * Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher
 ** Cancelled due to Thunderstorm Warning




Water Quality Monitoring Results at TCS_I

Date	Weather Condition	Sea Condition*	Sampling Time	Depth (m)		Temperature (°C)		pH		Salinity ppt		DO Saturation (%)		Dissolved Oxygen (mg/L)		Turbidity(NTU)		Suspended Solids (mg/L)	
						Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
1-Jun-09	Sunny	Calm	13:06	Middle	0.2	19.0 19.0	19	7.4 7.5	7.5	0.02 0.02	0.02	97.0 96.6	96.8	7.7 7.6	7.7	1.9 1.8	1.9	<2.5 <2.5	<2.5
3-Jun-09	Cloudy	Calm	11:48	Middle	0.2	18.9 18.9	18.9	7.4 7.4	7.4	0.02 0.02	0.02	95.7 95.3	95.5	7.6 7.6	7.6	1.7 1.6	1.7	<2.5 <2.5	<2.5
5-Jun-09	Sunny	Calm	12:00	Middle	0.2	18.9 18.9	18.9	7.4 7.4	7.4	0.02 0.02	0.02	96.4 96.0	96.2	7.6 7.6	7.6	1.6 1.5	1.6	<2.5 <2.5	<2.5
8-Jun-09	Cloudy	Calm	12:26	Middle	0.2	18.9 18.9	18.9	7.4 7.4	7.4	0.02 0.02	0.02	97.6 97.2	97.4	7.7 7.7	7.7	1.6 1.5	1.6	<2.5 <2.5	<2.5
10-Jun-09	Cloudy	Calm	11:53	Middle	0.2	18.9 19.0	19	7.4 7.4	7.4	0.02 0.02	0.02	97.1 96.7	96.9	7.7 7.7	7.7	1.5 1.4	1.5	<2.5 <2.5	<2.5
12-Jun-09	Cloudy	Calm	11:48	Middle	0.2	18.8 18.9	18.9	7.4 7.4	7.4	0.02 0.02	0.02	96.3 95.9	96.1	7.6 7.6	7.6	1.6 1.5	1.6	<2.5 <2.5	<2.5
15-Jun-09	Cloudy	Calm	12:09	Middle	0.2	18.9 18.9	18.9	7.4 7.4	7.4	0.02 0.02	0.02	97.4 97.0	97.2	7.7 7.7	7.7	1.6 1.5	1.6	<2.5 <2.5	<2.5
17-Jun-09	Sunny	Calm	11:42	Middle	0.2	18.9 18.9	18.9	7.4 7.4	7.4	0.02 0.02	0.02	96.6 96.2	96.4	7.7 7.6	7.7	1.7 1.6	1.7	<2.5 <2.5	<2.5
19-Jun-09	Cloudy	Calm	11:58	Middle	0.2	18.8 18.8	18.8	7.5 7.5	7.5	0.02 0.02	0.02	97.5 97.1	97.3	7.7 7.7	7.7	1.6 1.5	1.6	<2.5 <2.5	<2.5
22-Jun-09	Cloudy	Calm	12:20	Middle	0.2	18.8 18.8	18.8	7.4 7.4	7.4	0.02 0.02	0.02	96.2 95.8	96	7.6 7.6	7.6	1.5 1.4	1.5	<2.5 <2.5	<2.5
24-Jun-09	Rainy	Calm	11:35	Middle	0.2	18.8 18.8	18.8	7.5 7.5	7.5	0.02 0.02	0.02	96.9 96.5	96.7	7.7 7.6	7.7	1.6 1.5	1.6	<2.5 <2.5	<2.5
26-Jun-09	Rainy	Calm	12:04	Middle	0.2	18.8 18.8	18.8	7.5 7.5	7.5	0.02 0.02	0.02	98.0 97.6	97.8	7.7 7.7	7.7	1.5 1.4	1.5	<2.5 <2.5	<2.5
29-Jun-09	Fine	Calm	14:32	Middle	0.2	18.7 18.7	18.7	7.5 7.5	7.5	0.02 0.02	0.02	97.4 97.0	97.2	7.7 7.7	7.7	1.6 1.5	1.6	<2.5 <2.5	<2.5
30-Jun-09	Cloudy	Calm	12:16	Middle	0.2	18.8 18.8	18.8	7.5 7.5	7.5	0.02 0.02	0.02	95.7 95.3	95.5	7.6 7.6	7.6	1.7 1.6	1.7	<2.5 <2.5	<2.5

The reporting limit for laboratory analysis of suspended solids is 2.5 mg/L. For the results below the reporting limit, the SS level will be taken as 2.5 mg/L.




Remarks: * Calm: Small or no wave; Moderate: Between calm and rough; Rough : White capped or rougher
 ** Cancelled due to Thunderstorm Warning

Dissolved Oxygen

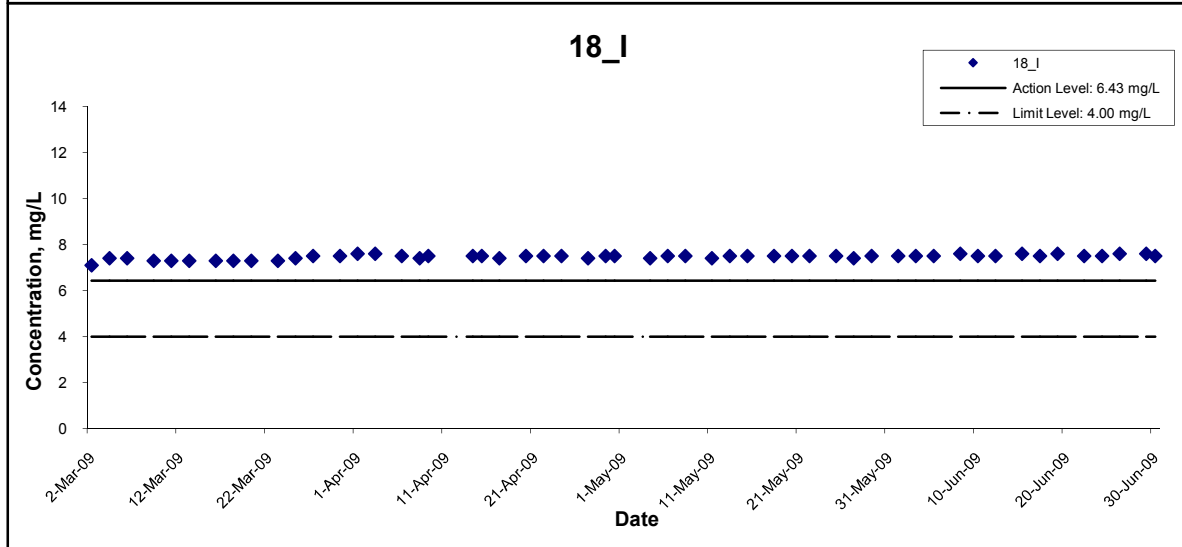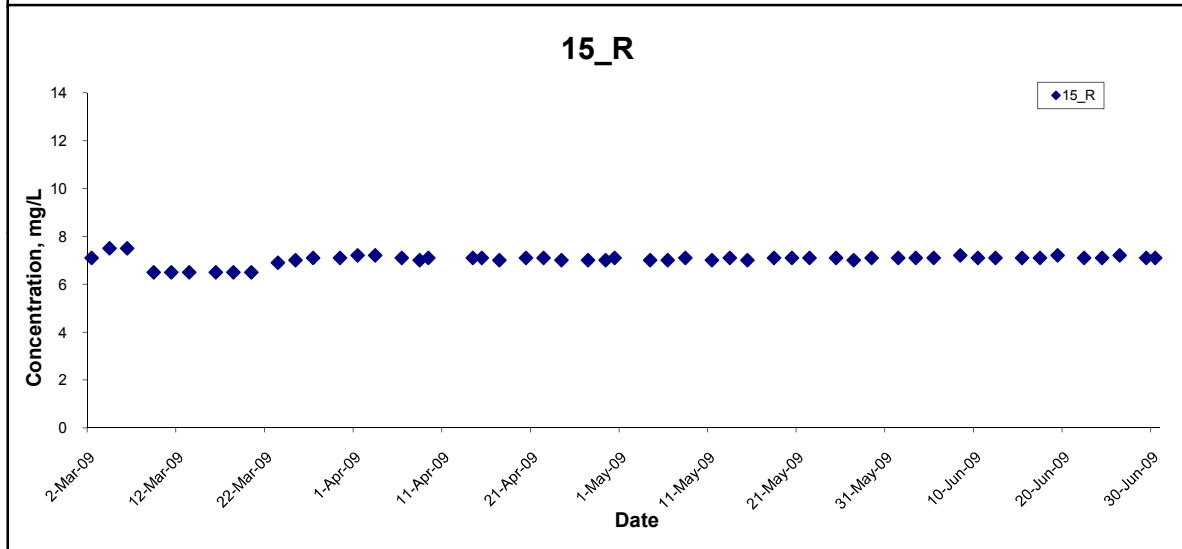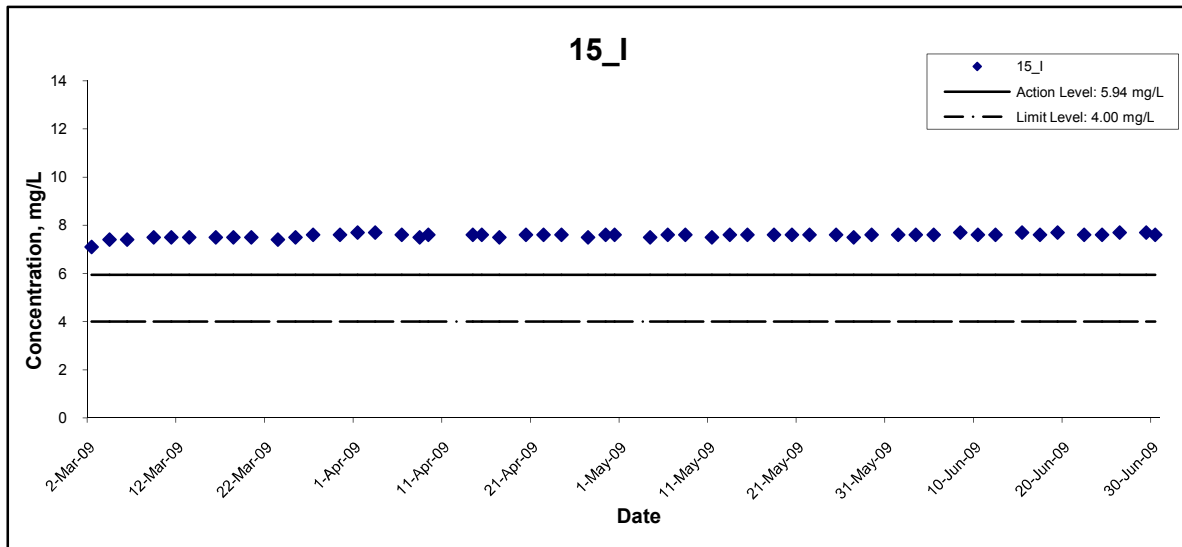




Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale N.T.S	Project No. MA6030	
	Date Jun 09	Appendix F	

Dissolved Oxygen

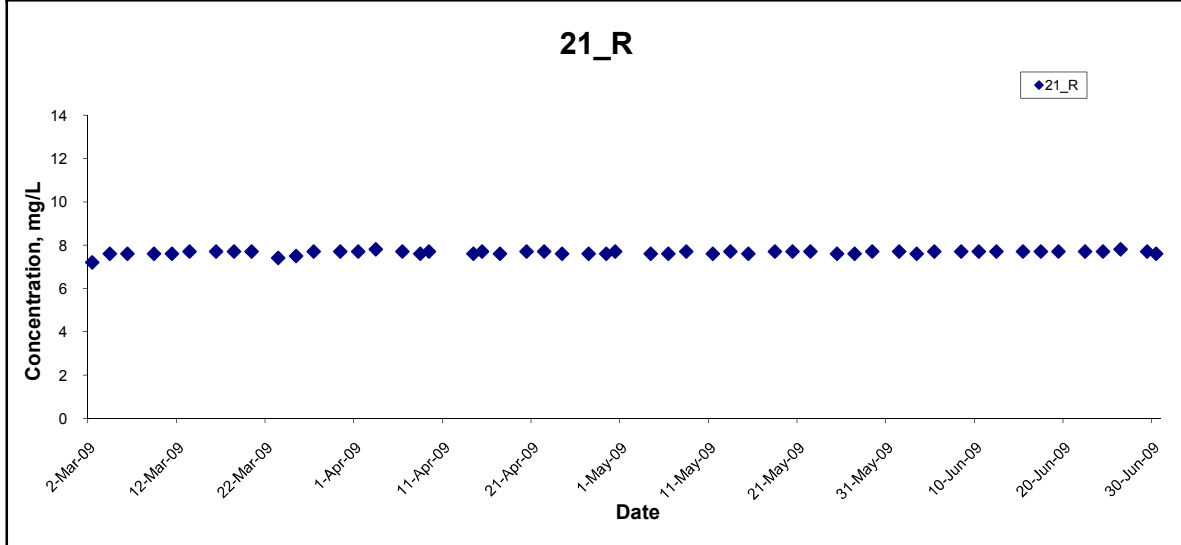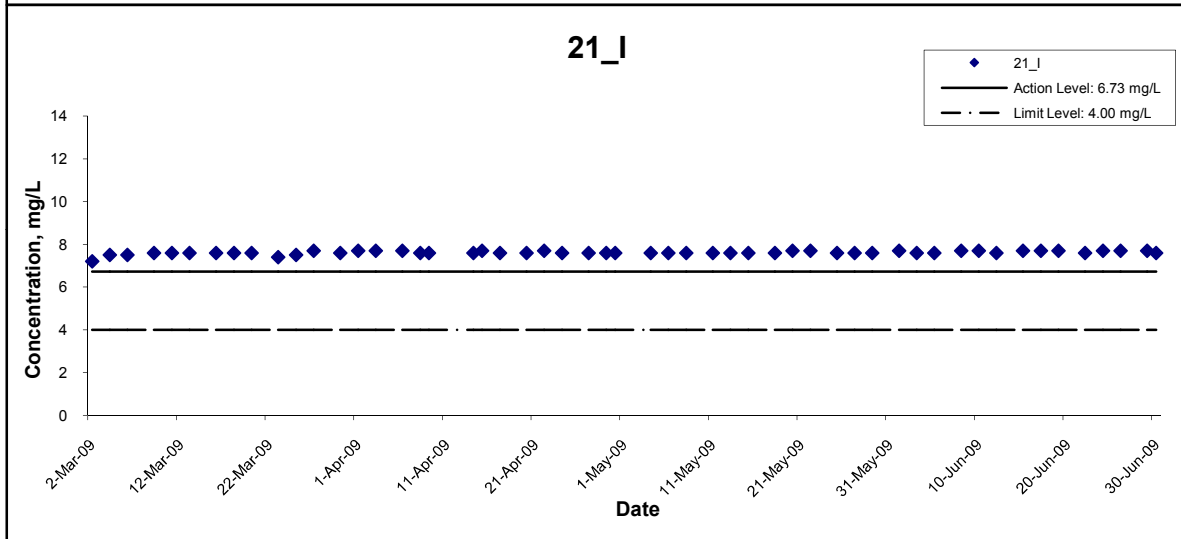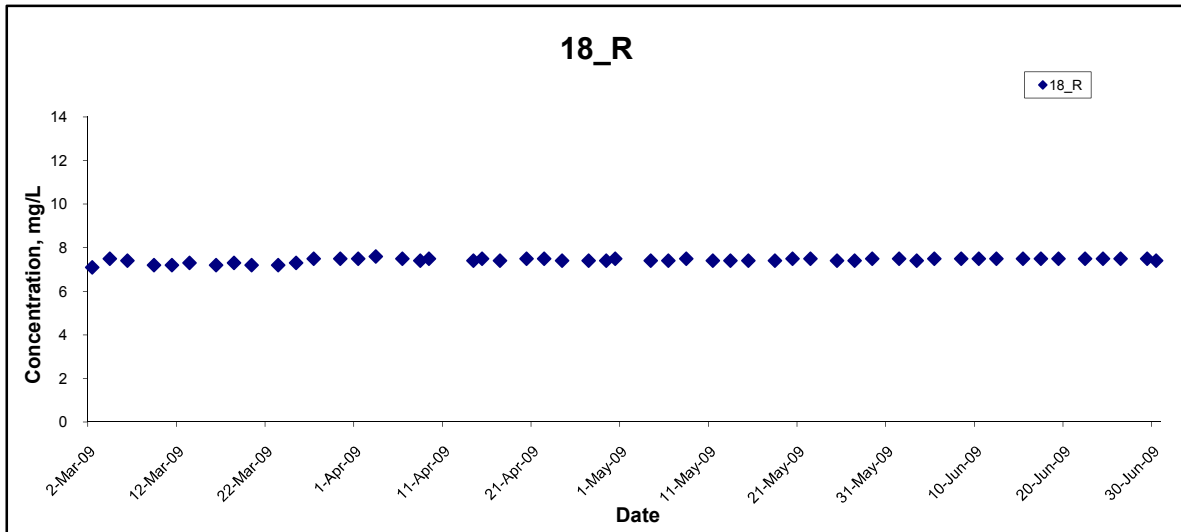




Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale N.T.S	Project No. MA6030	CINOTECH
	Date Jun 09	Appendix F	

Dissolved Oxygen

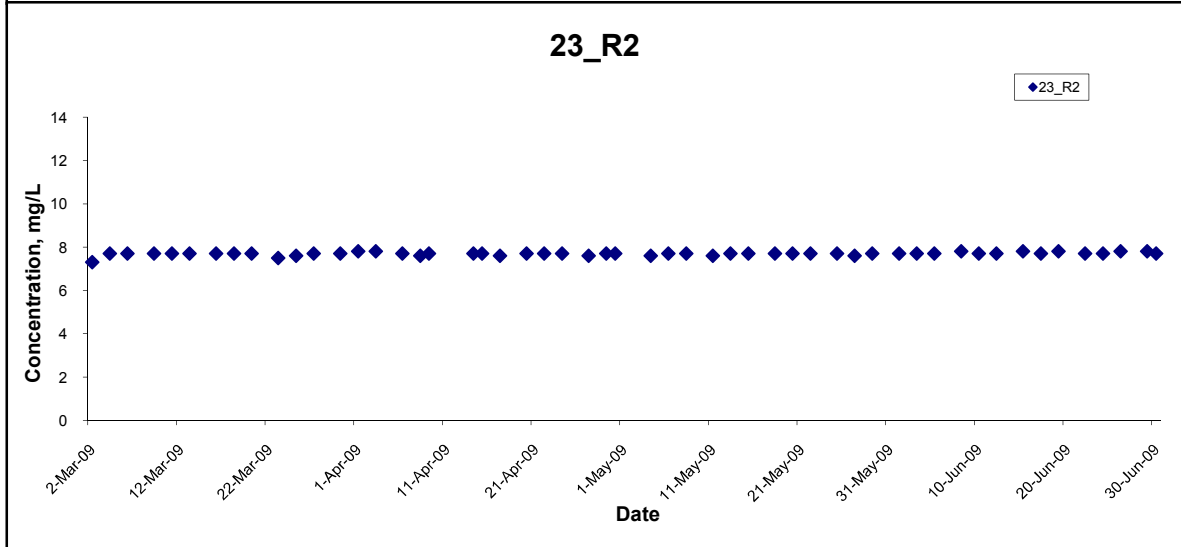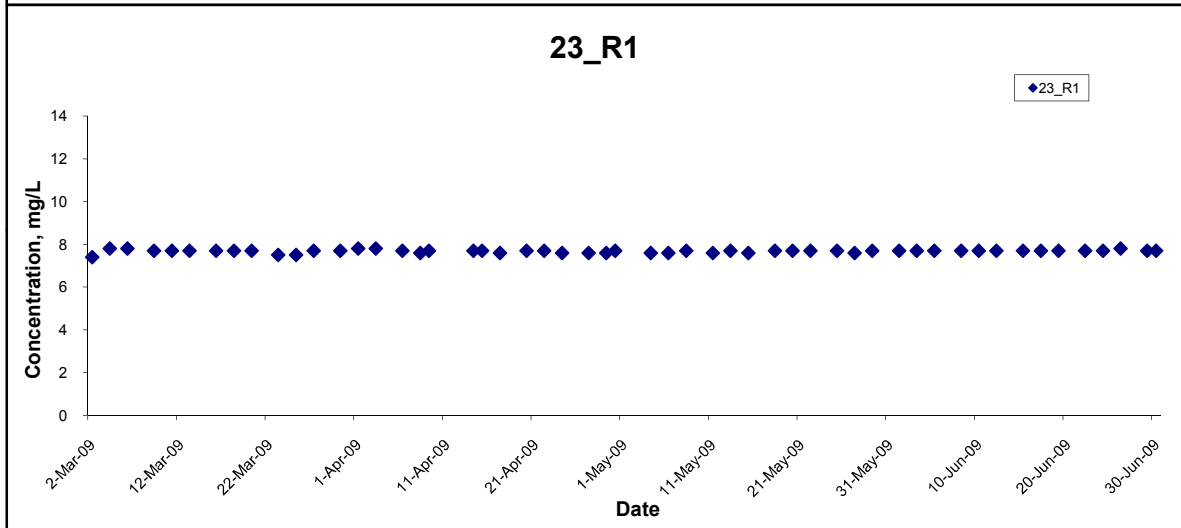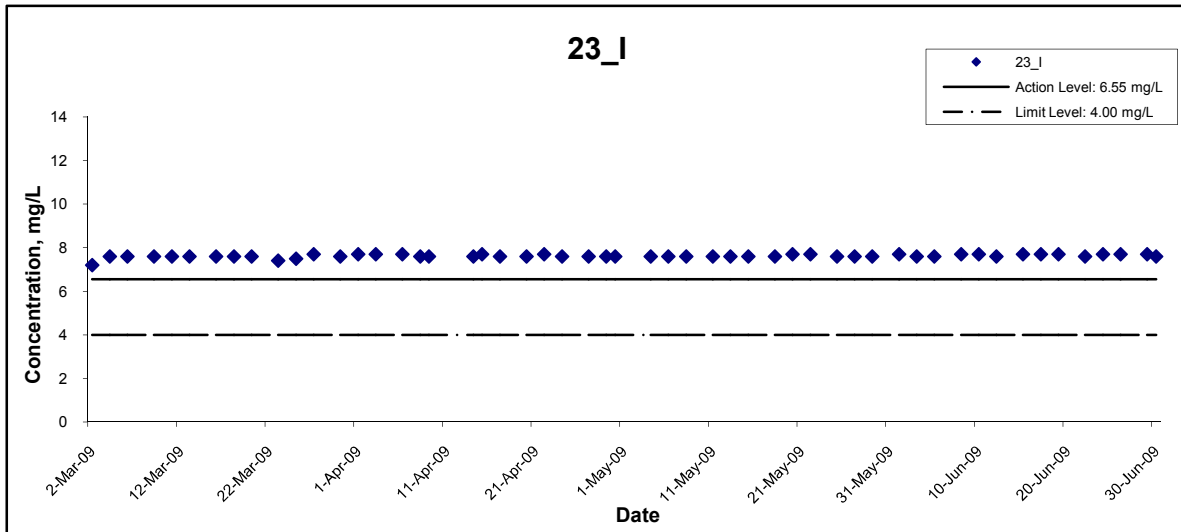




Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale N.T.S	Project No. MA6030	CINOTECH
	Date Jun 09	Appendix F	

Dissolved Oxygen

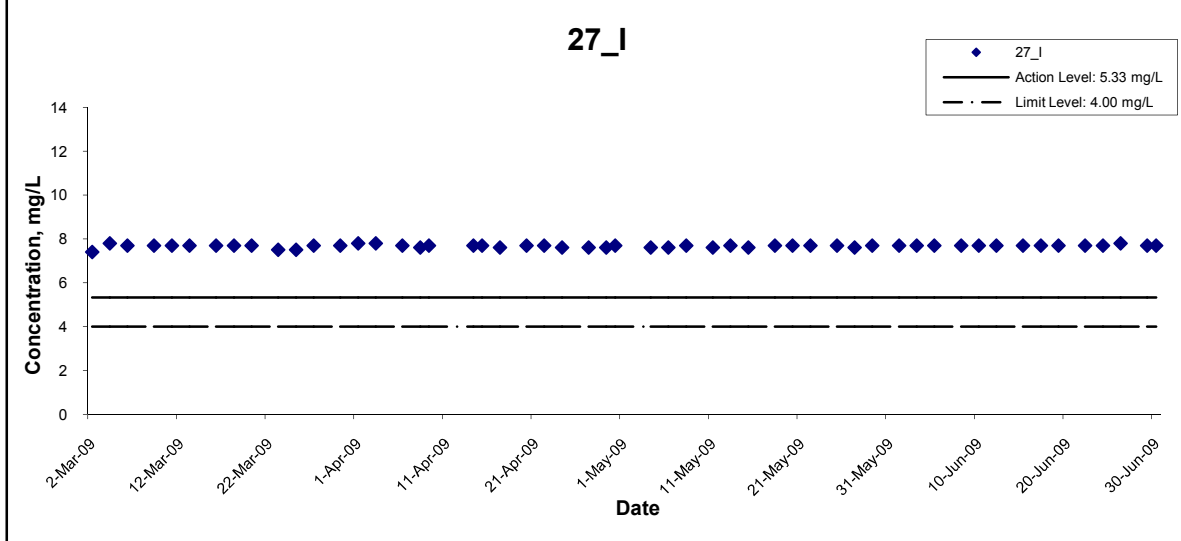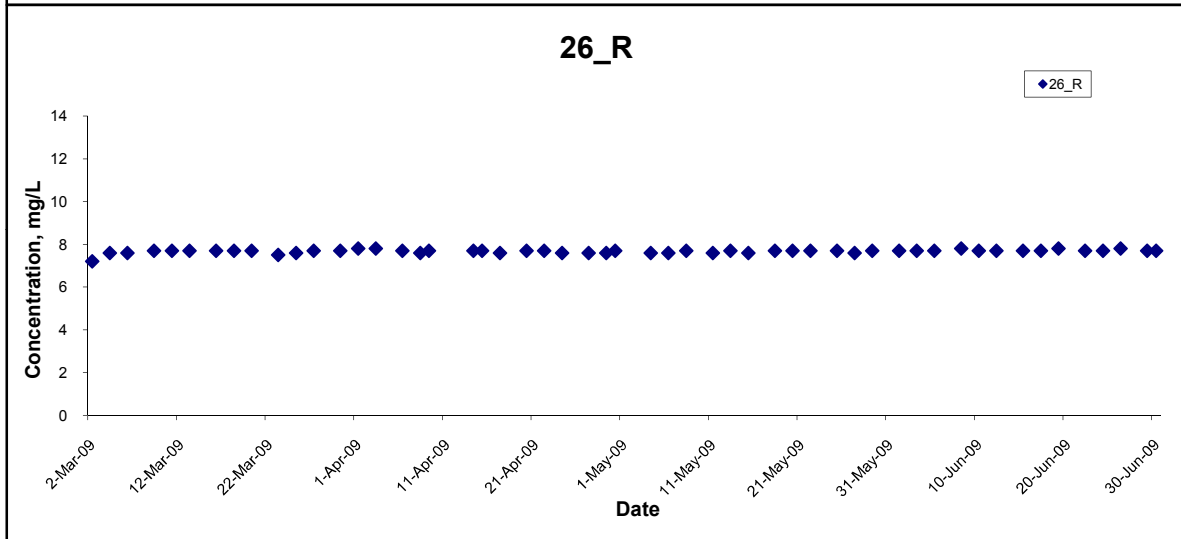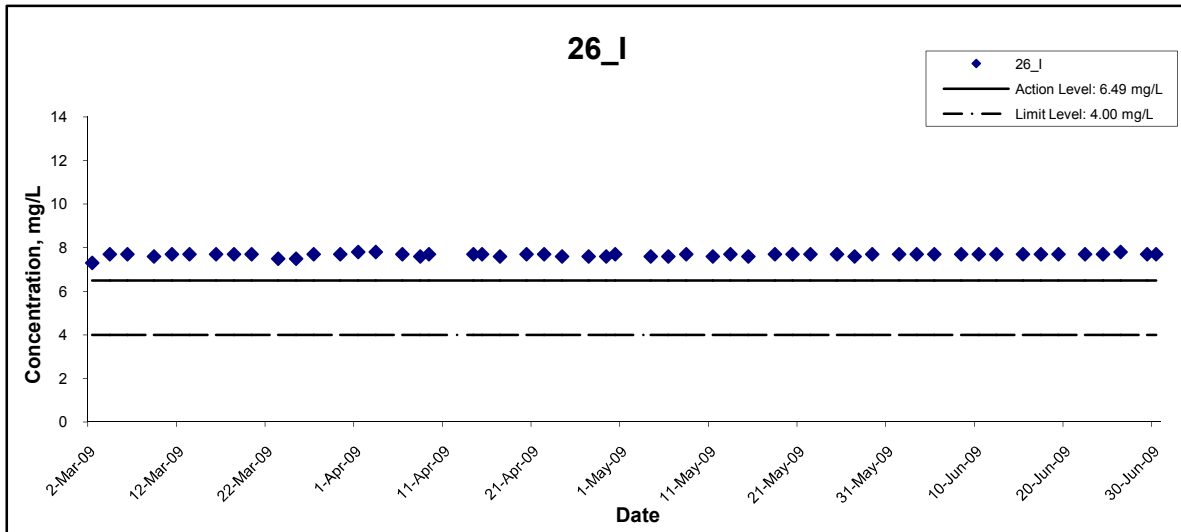




Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale N.T.S	Project No. MA6030	CINOTECH
	Date Jun 09	Appendix F	

Dissolved Oxygen

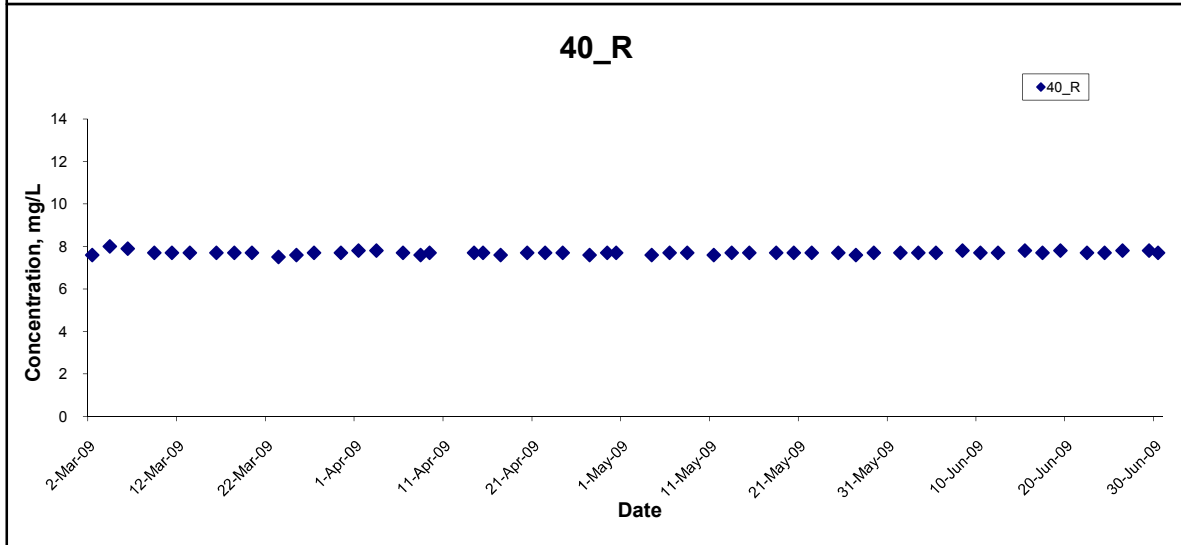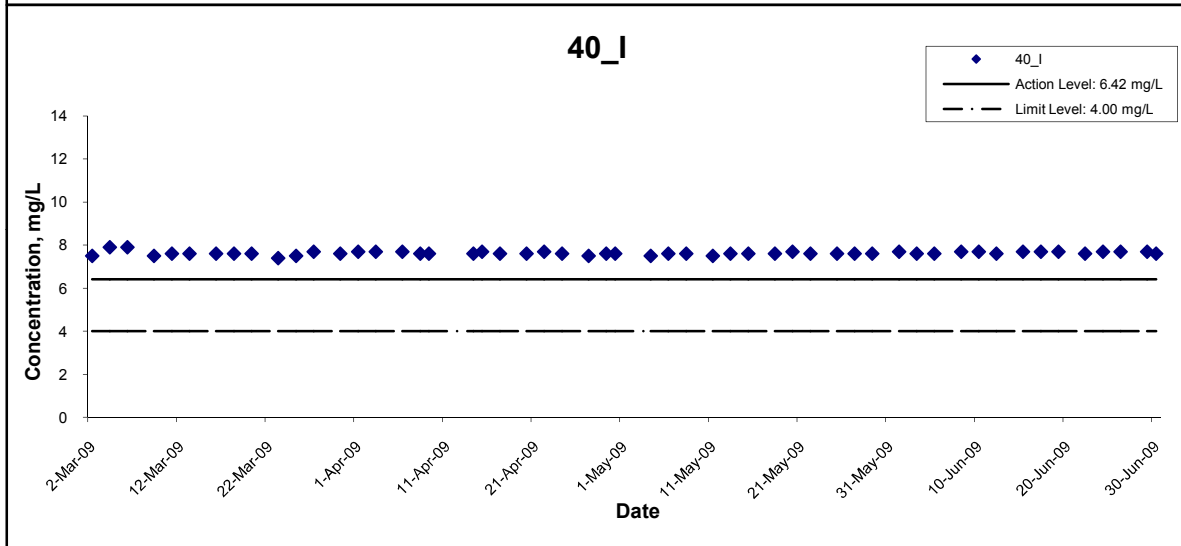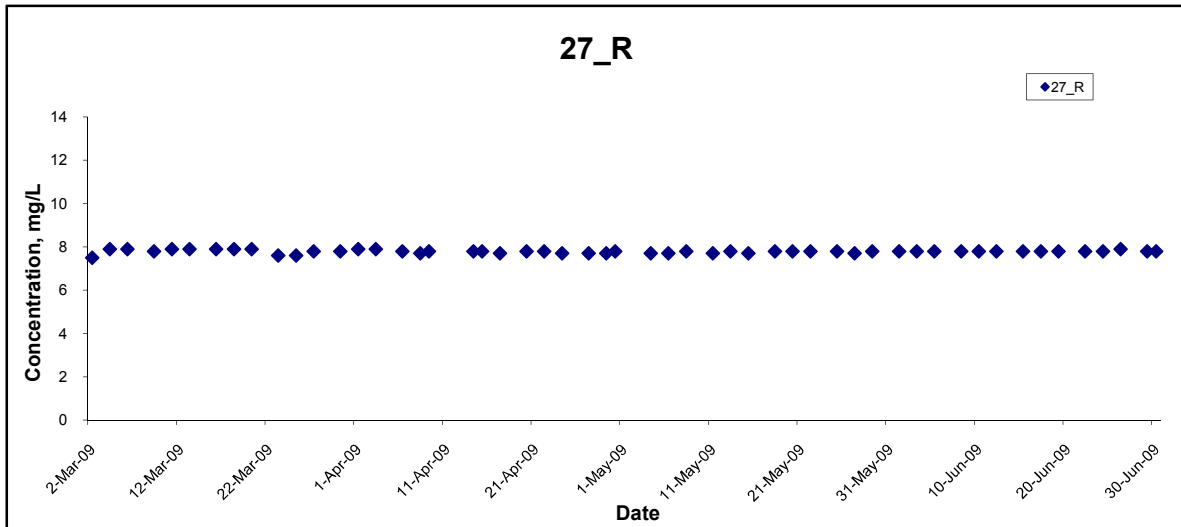


Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale N.T.S	Project No. MA6030	
	Date Jun 09	Appendix F	

Dissolved Oxygen

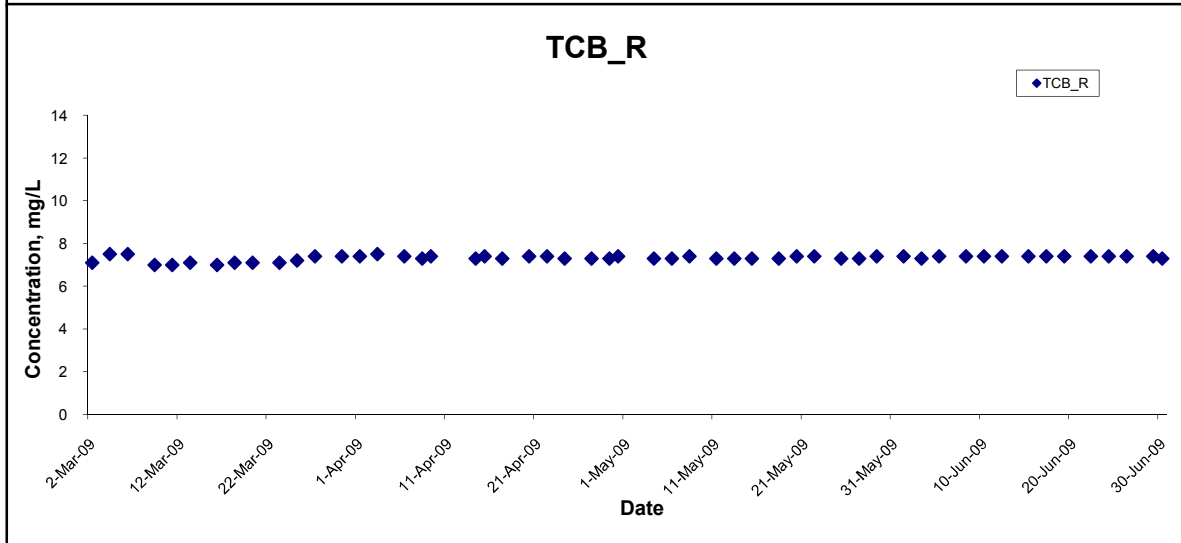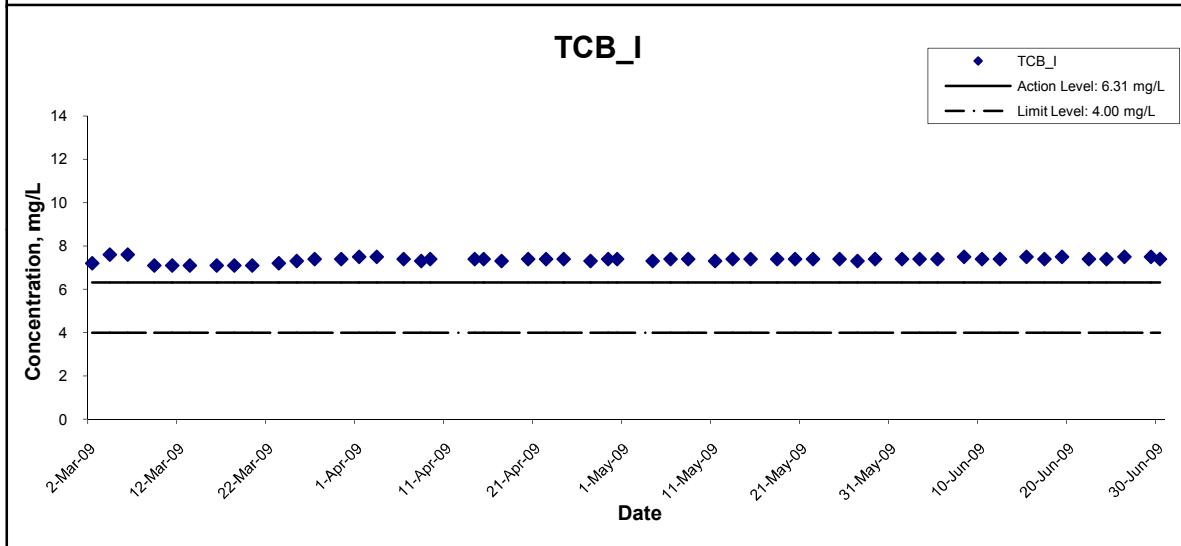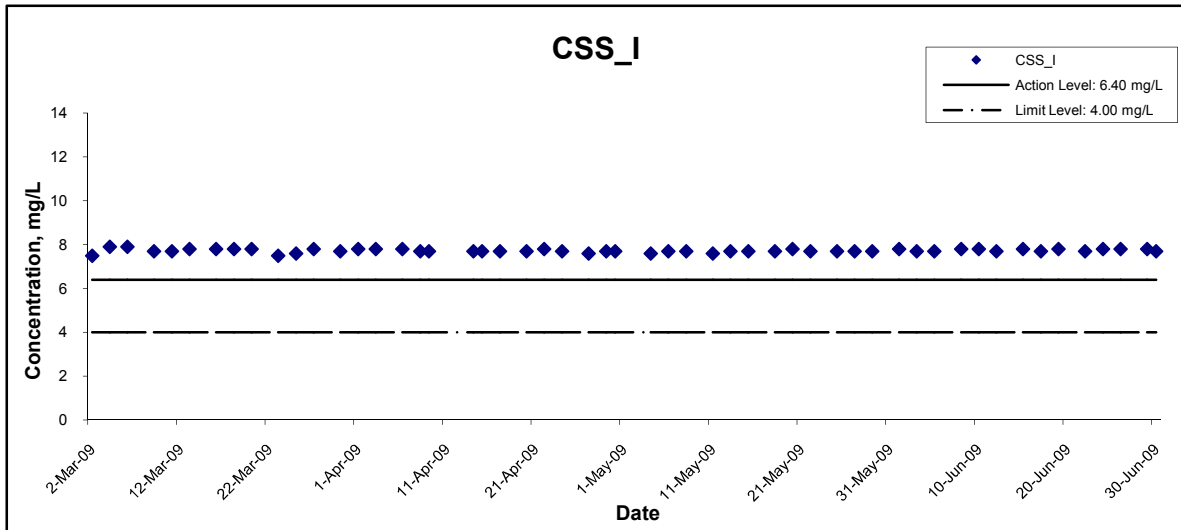




Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale N.T.S	Project No. MA6030	
	Date Jun 09	Appendix F	

Dissolved Oxygen

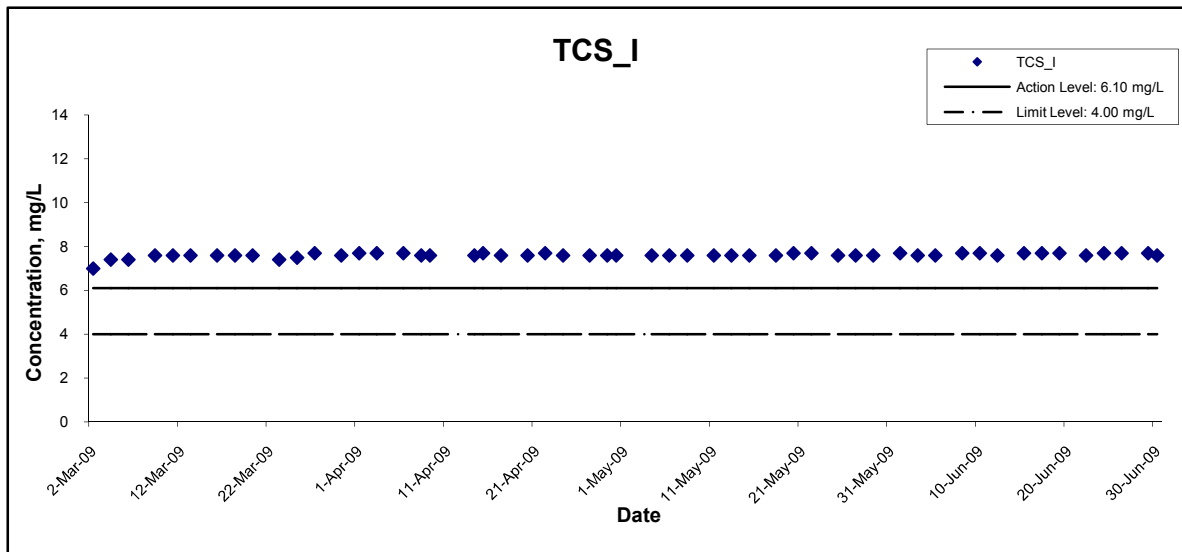




Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale N.T.S	Project No. MA6030	CINOTECH
	Date Jun 09	Appendix F	

Turbidity

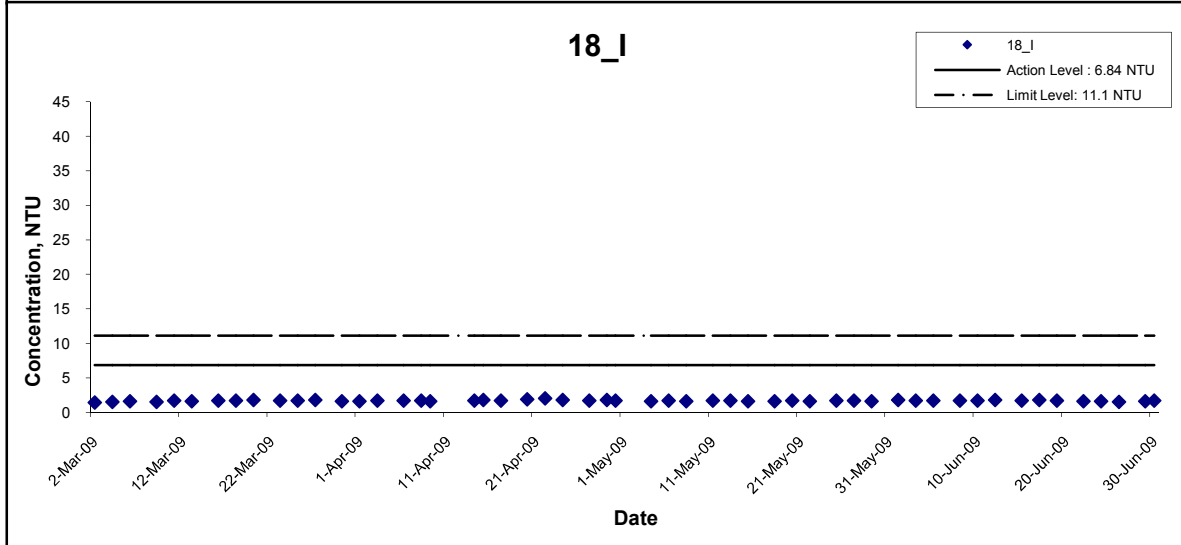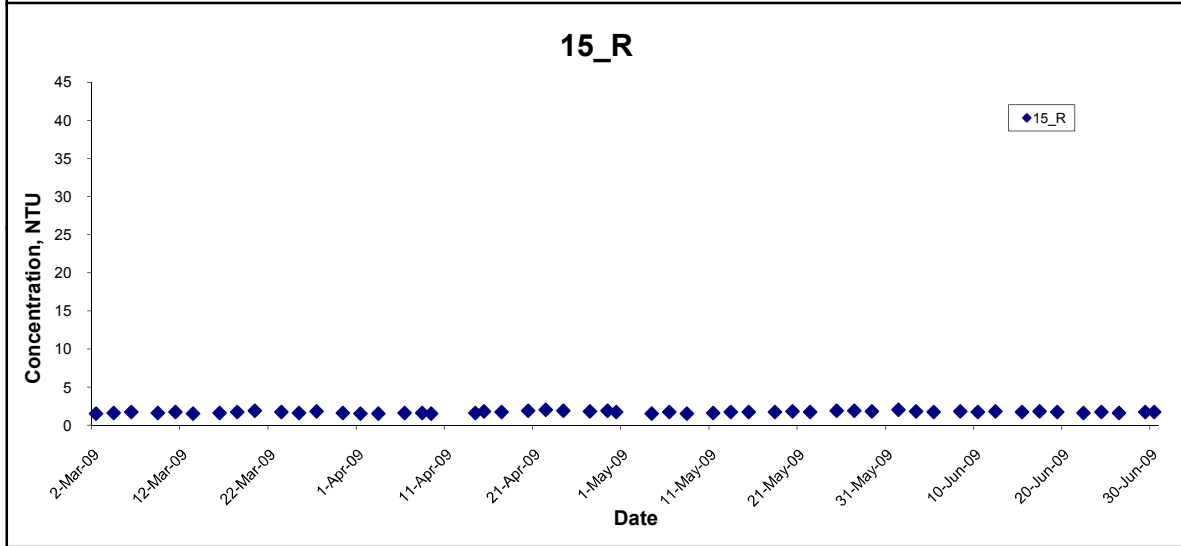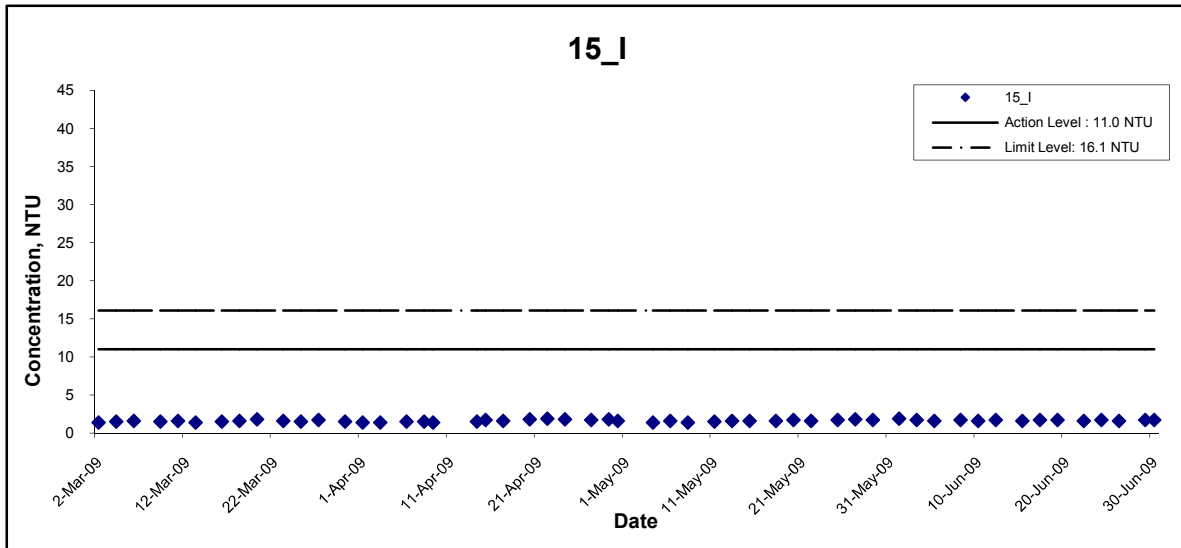




Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale N.T.S	Project No. MA6030	
	Date Jun 09	Appendix F	

Turbidity

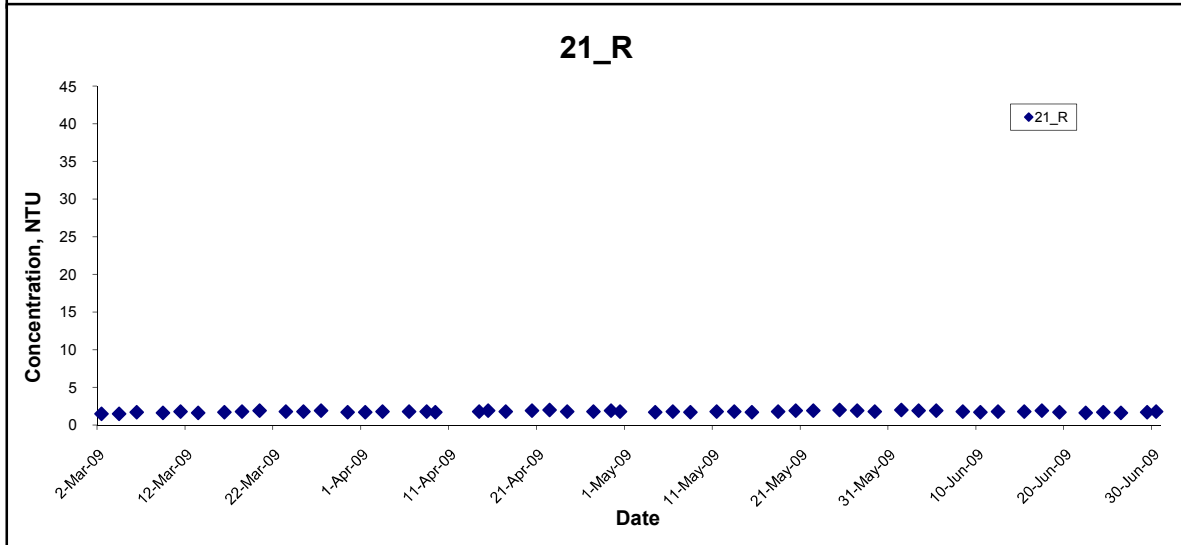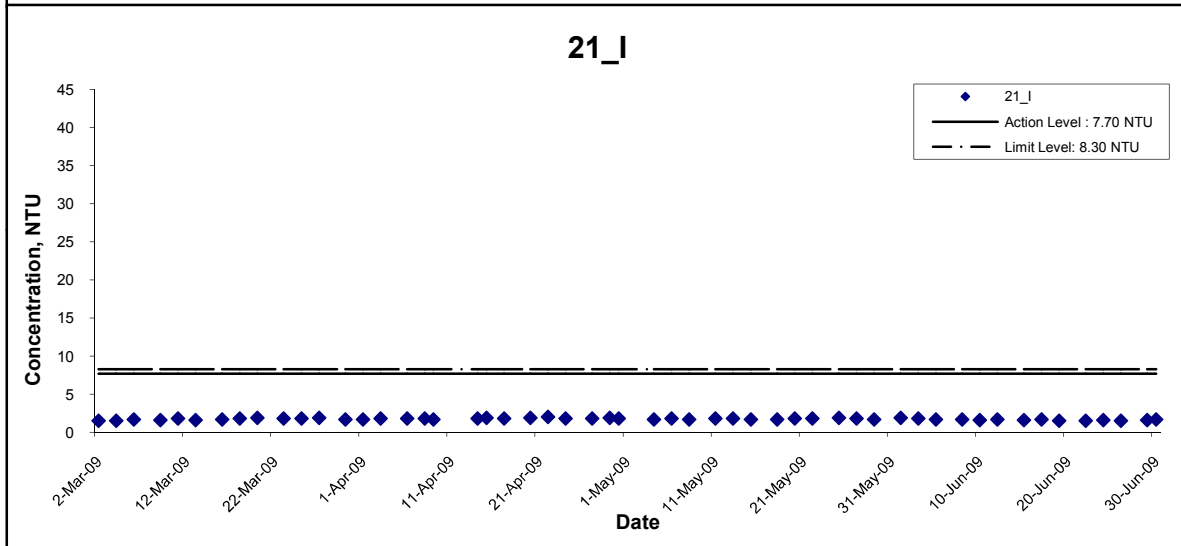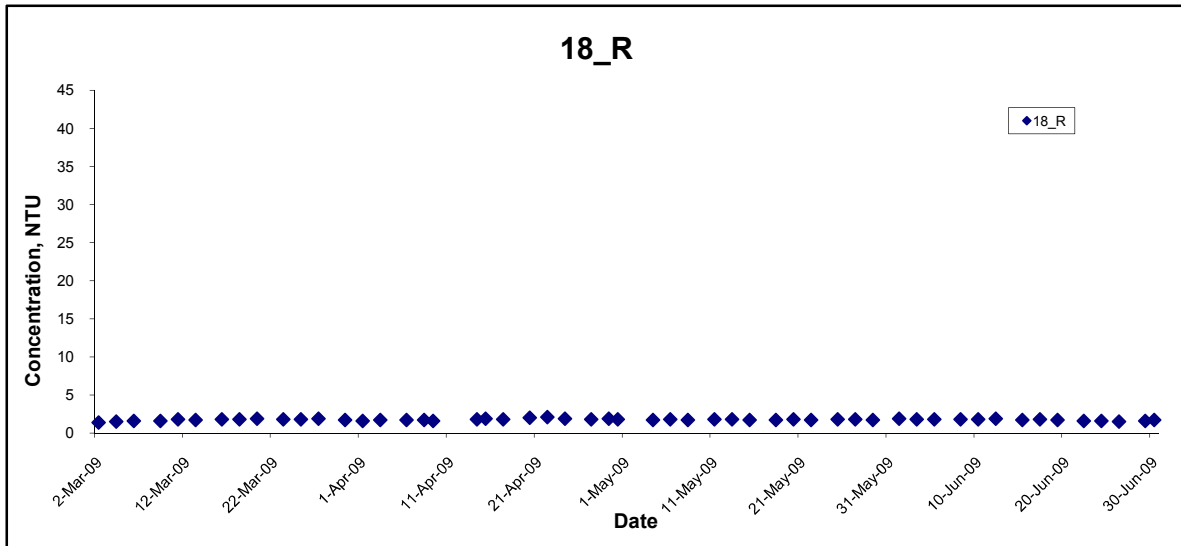




Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale N.T.S	Project No. MA6030	
	Date Jun 09	Appendix F	

Turbidity

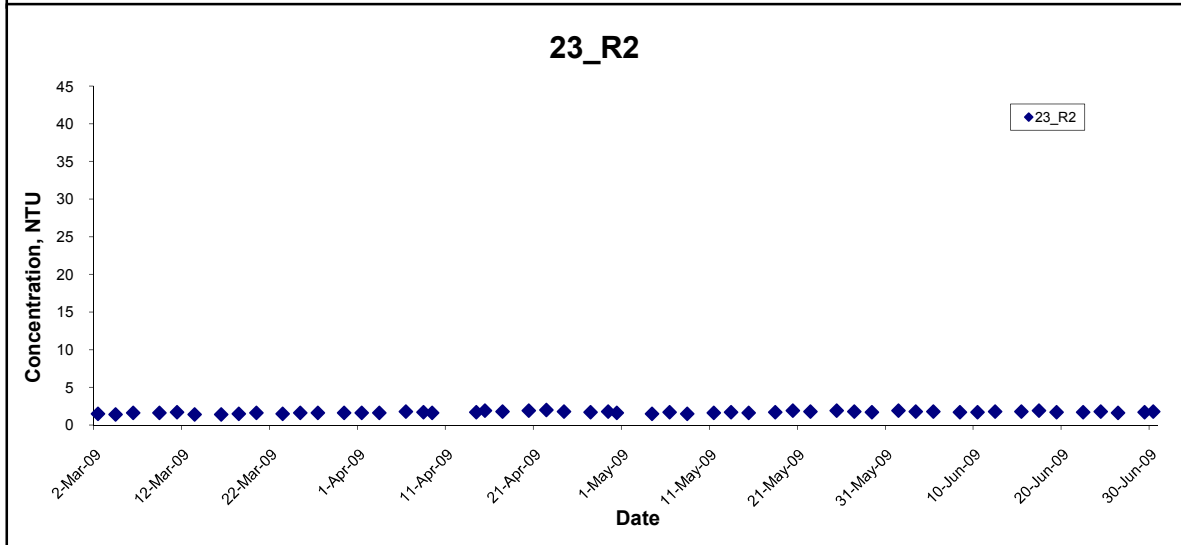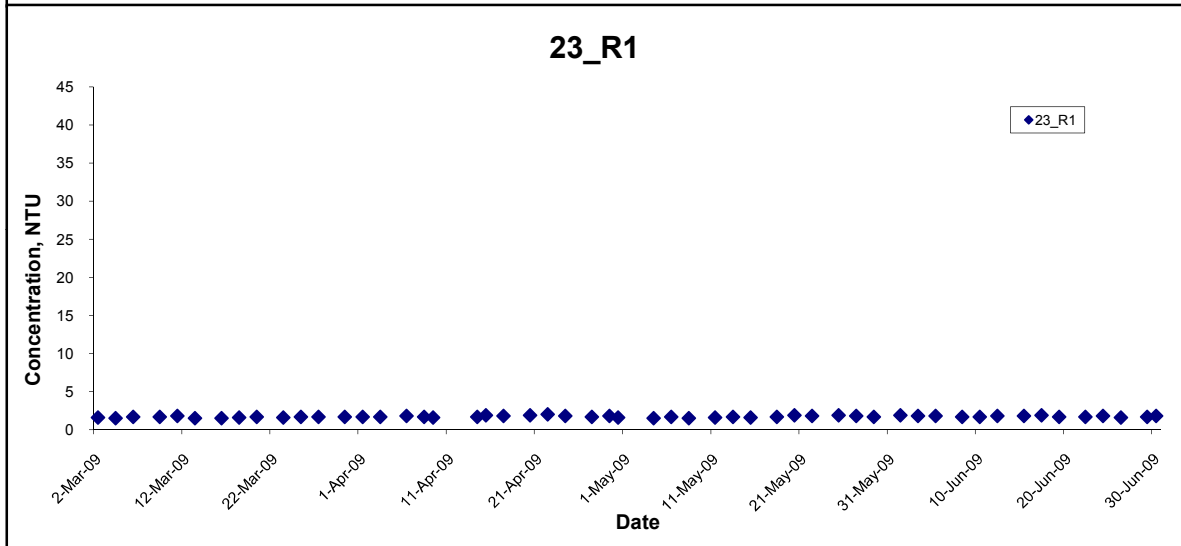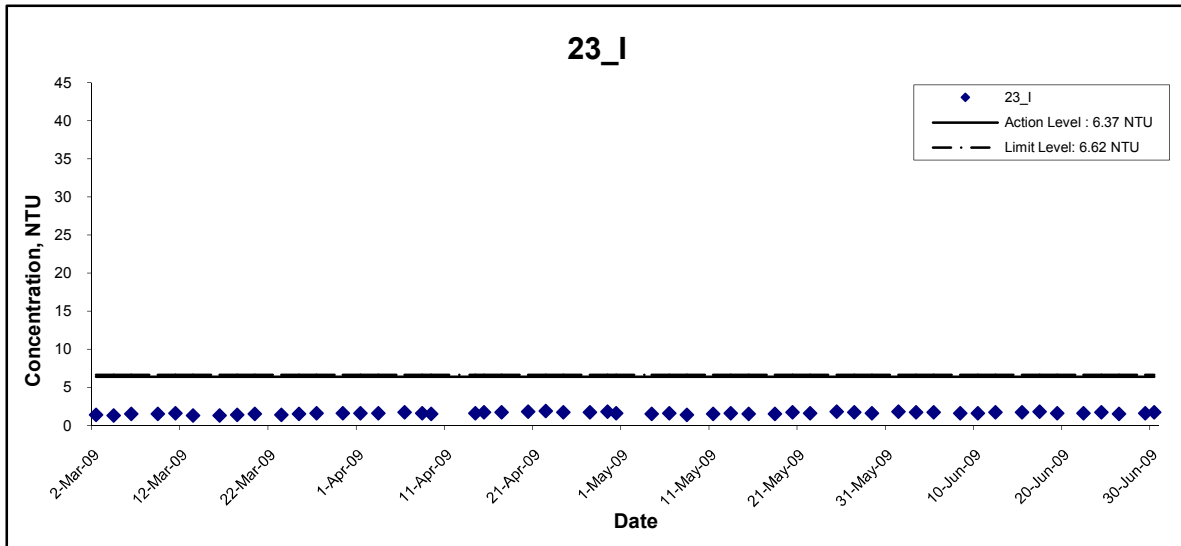




Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale N.T.S	Project No. MA6030	
	Date Jun 09	Appendix F	

Turbidity

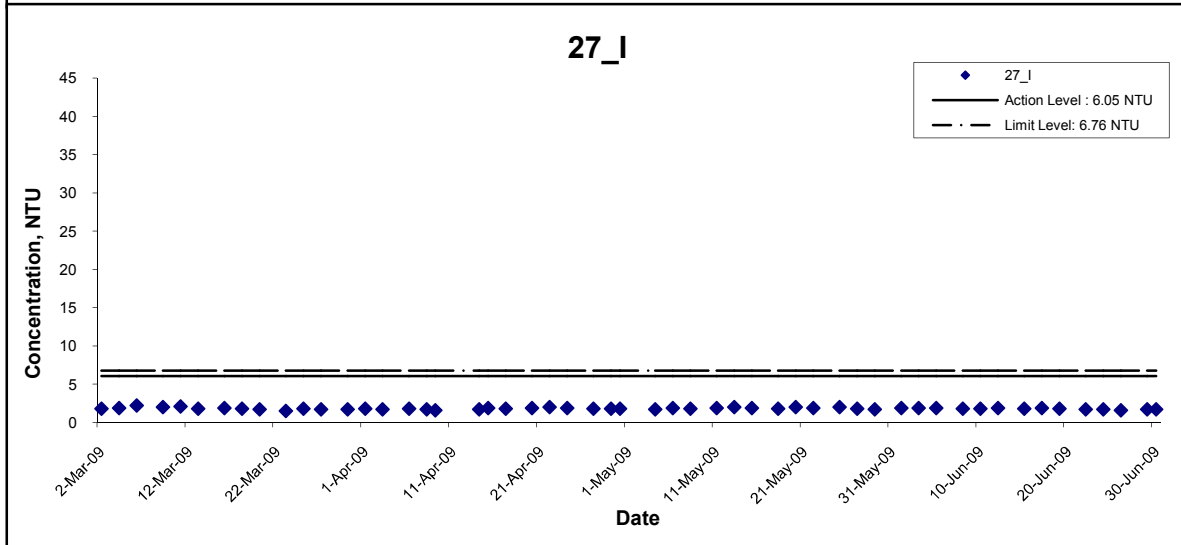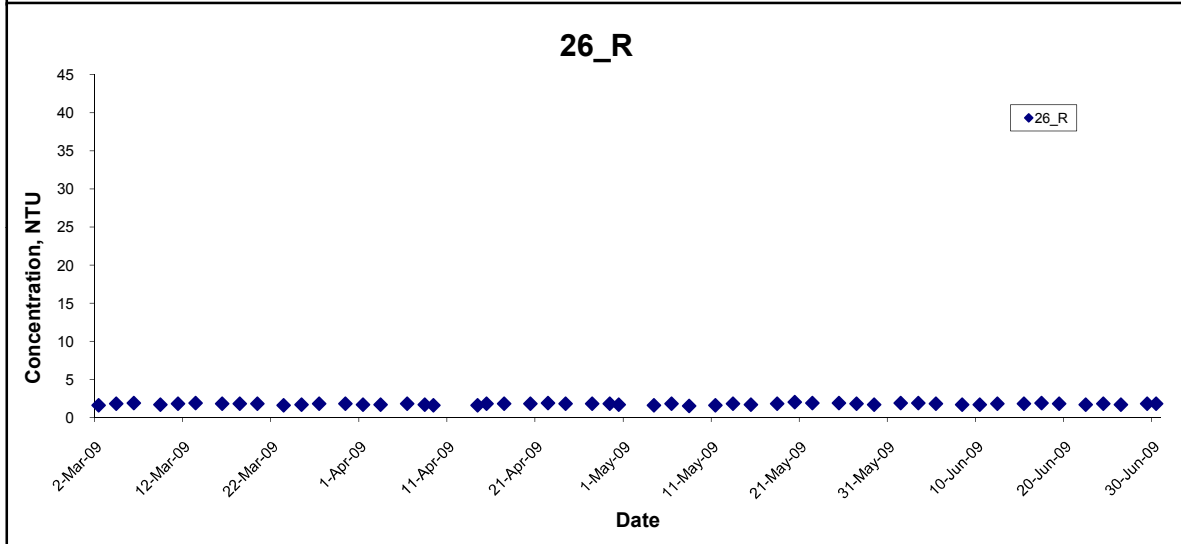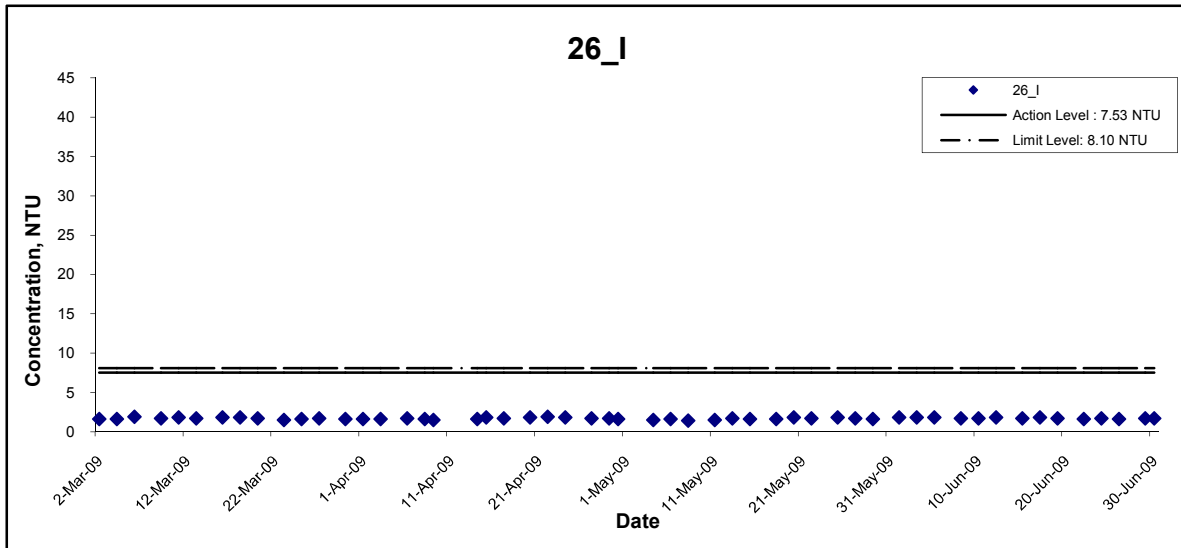




Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale N.T.S	Project No. MA6030	
	Date Jun 09	Appendix F	

Turbidity

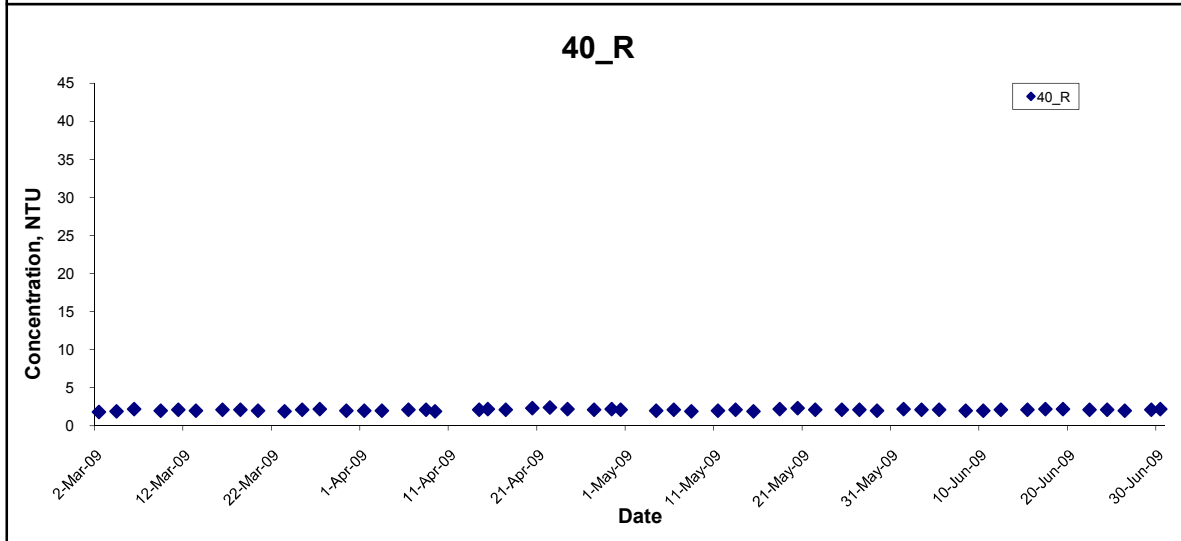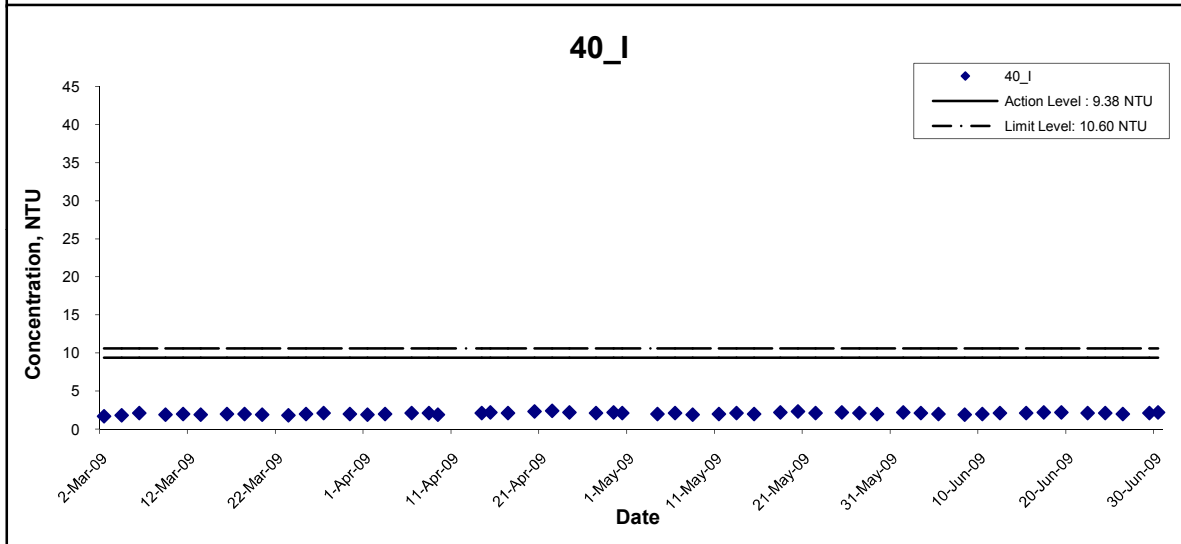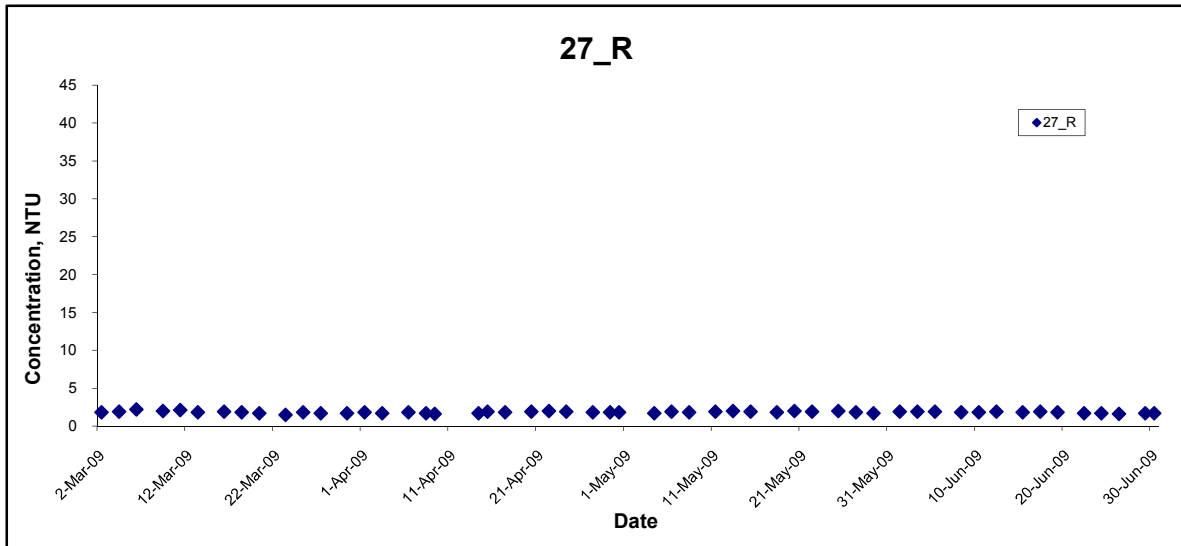

Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale N.T.S	Project No. MA6030	CINOTECH
	Date Jun 09	Appendix F	


Turbidity

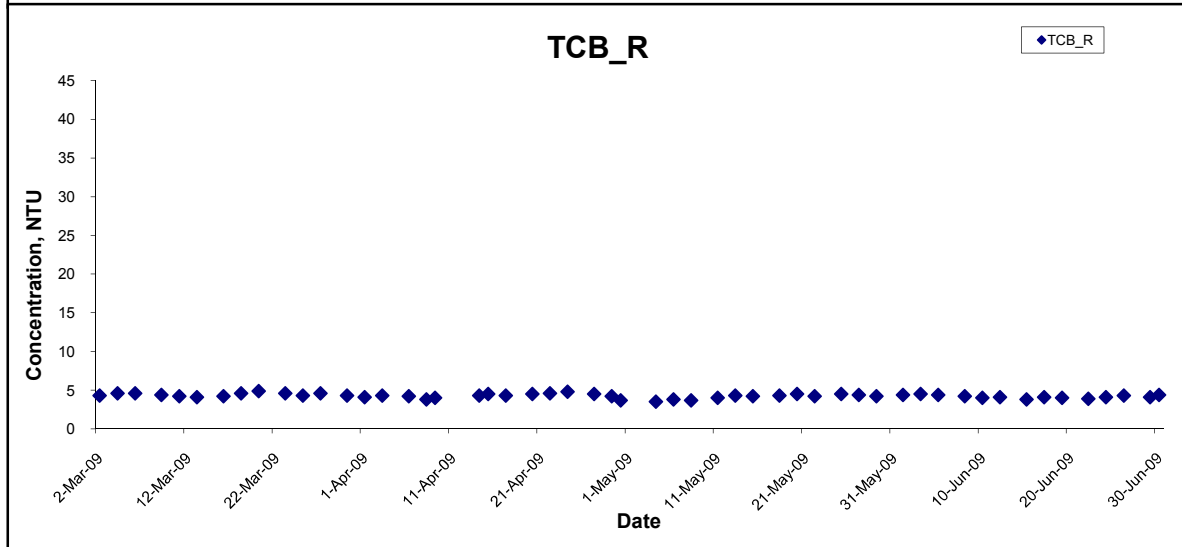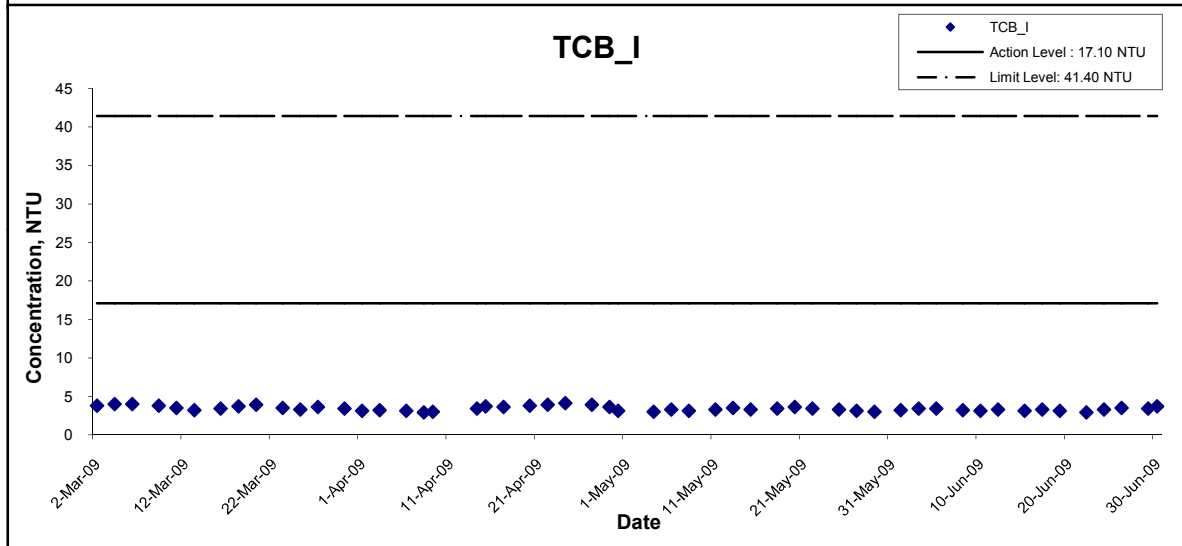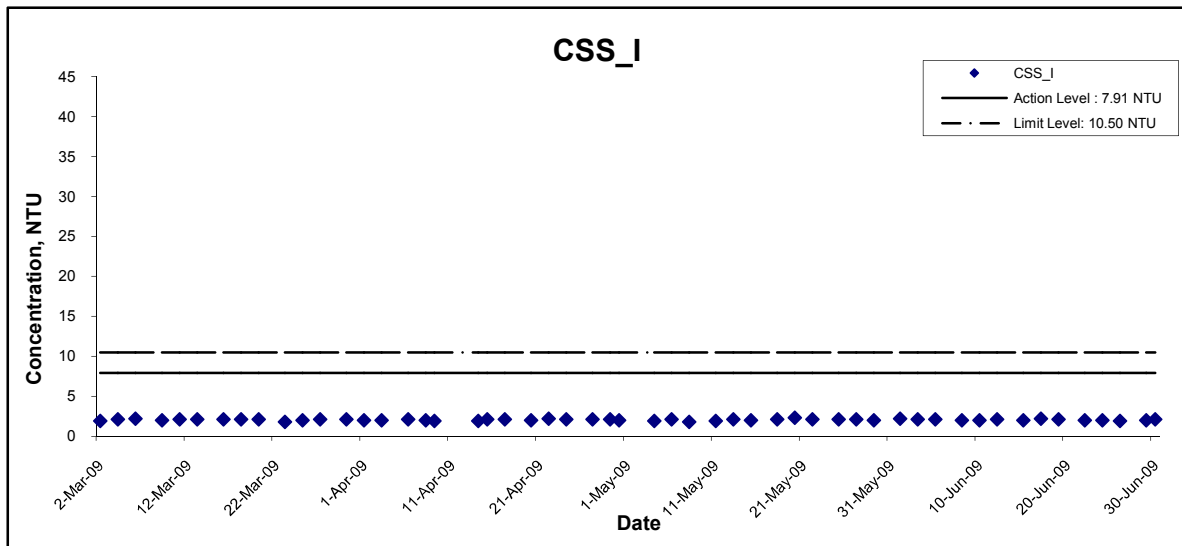

Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale	N.T.S	Project No.	MA6030
	Date	Jun 09	Appendix	F




CINOTECH

Turbidity

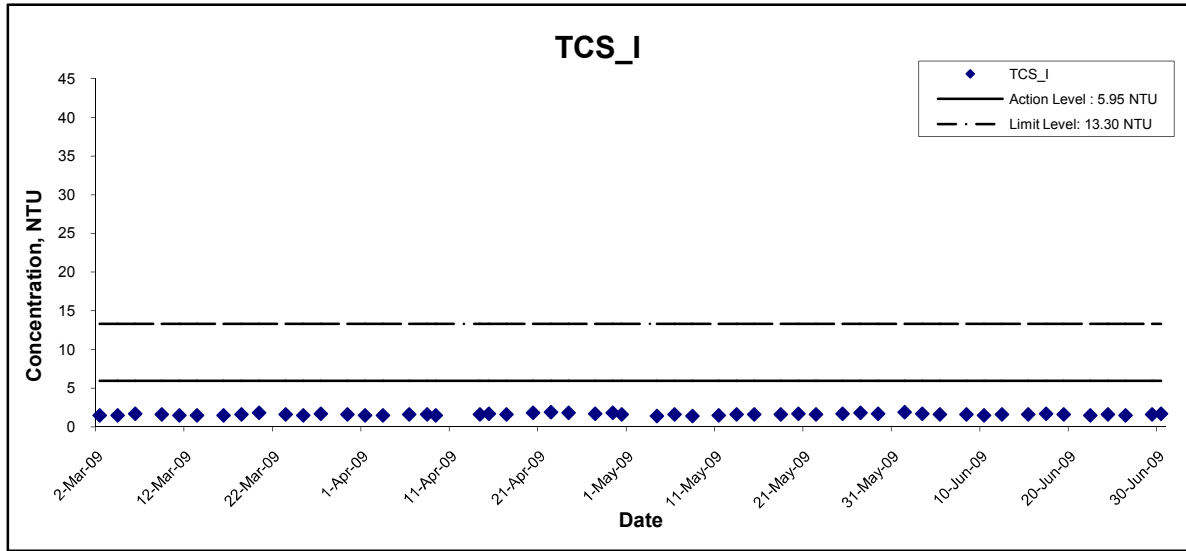




Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale N.T.S	Project No. MA6030	CINOTECH
	Date Jun 09	Appendix F	

Suspended Solids

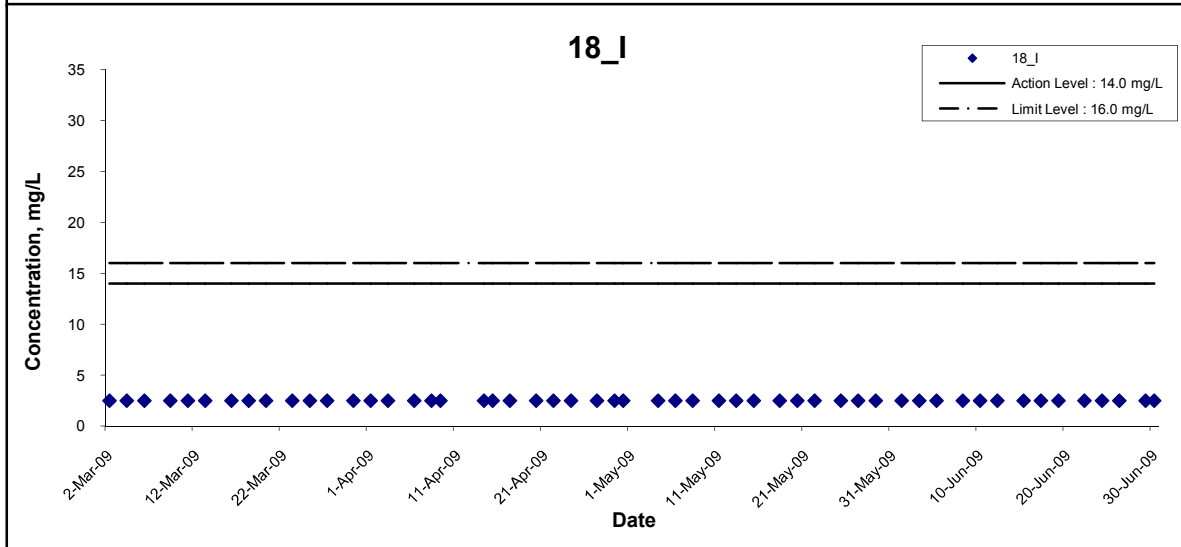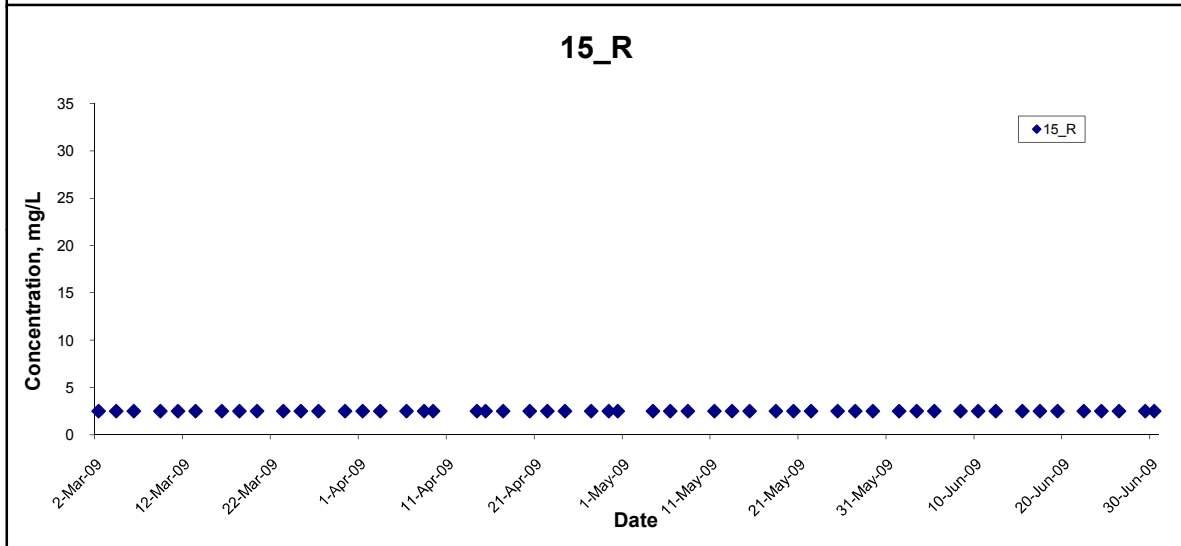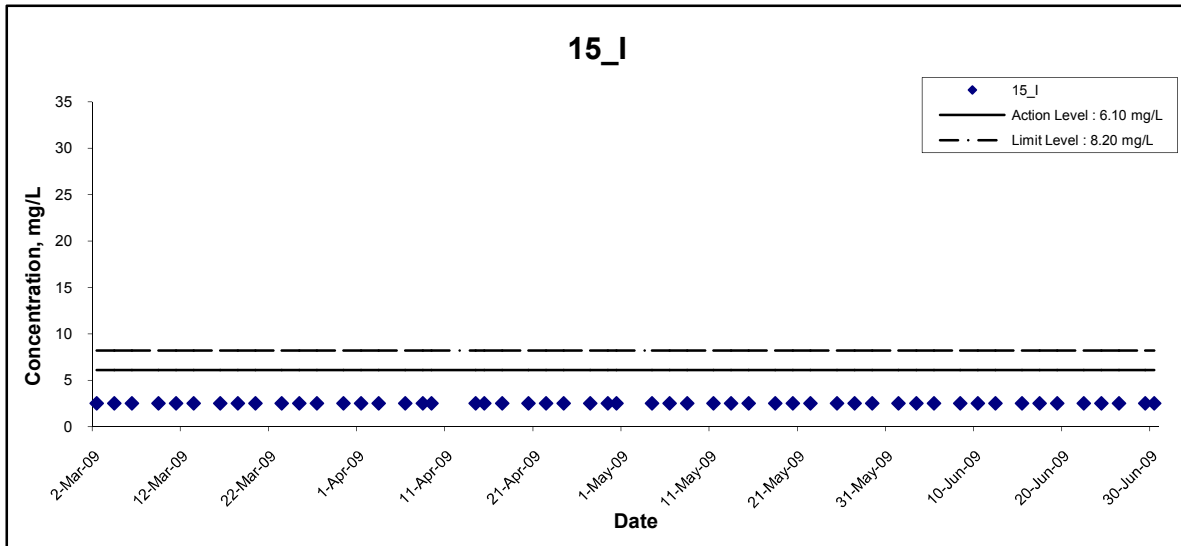




Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale N.T.S	Project No. MA6030	
	Date Jun 09	Appendix F	

Suspended Solids

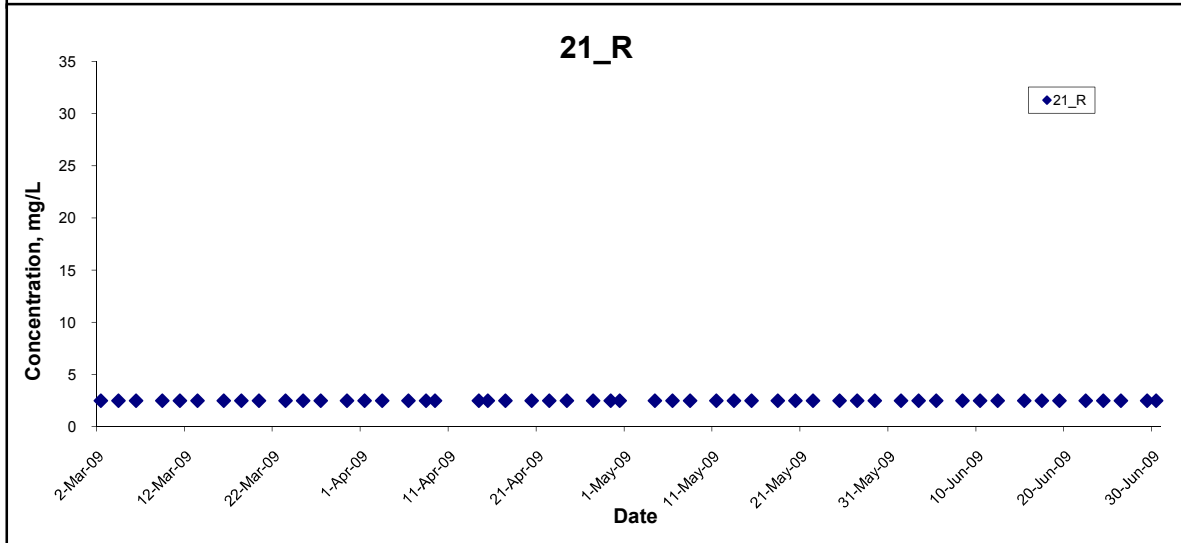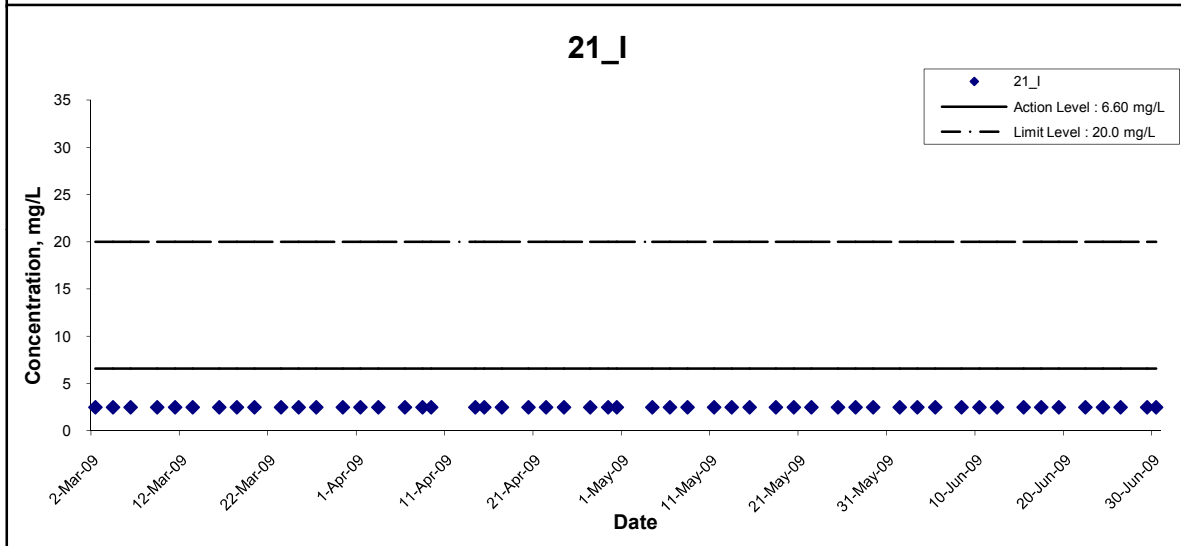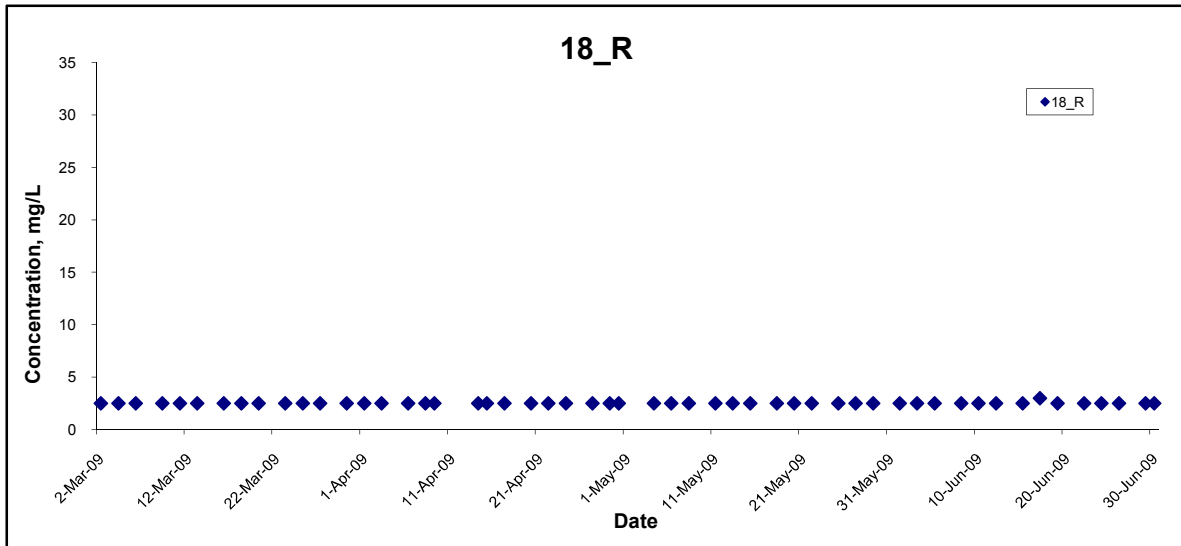




Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale N.T.S	Project No. MA6030	
	Date Jun 09	Appendix F	

Suspended Solids

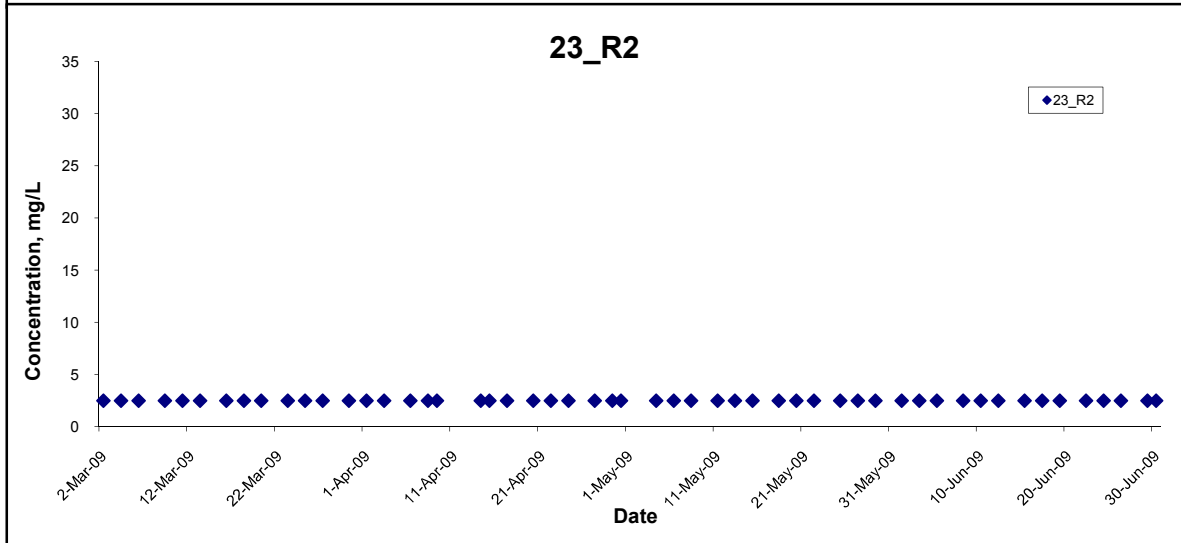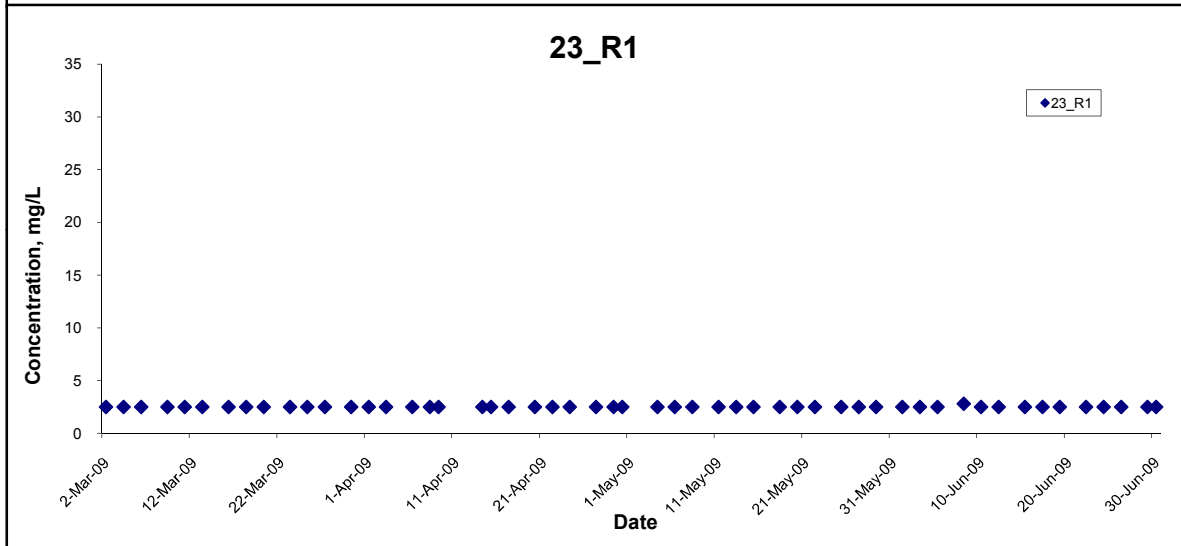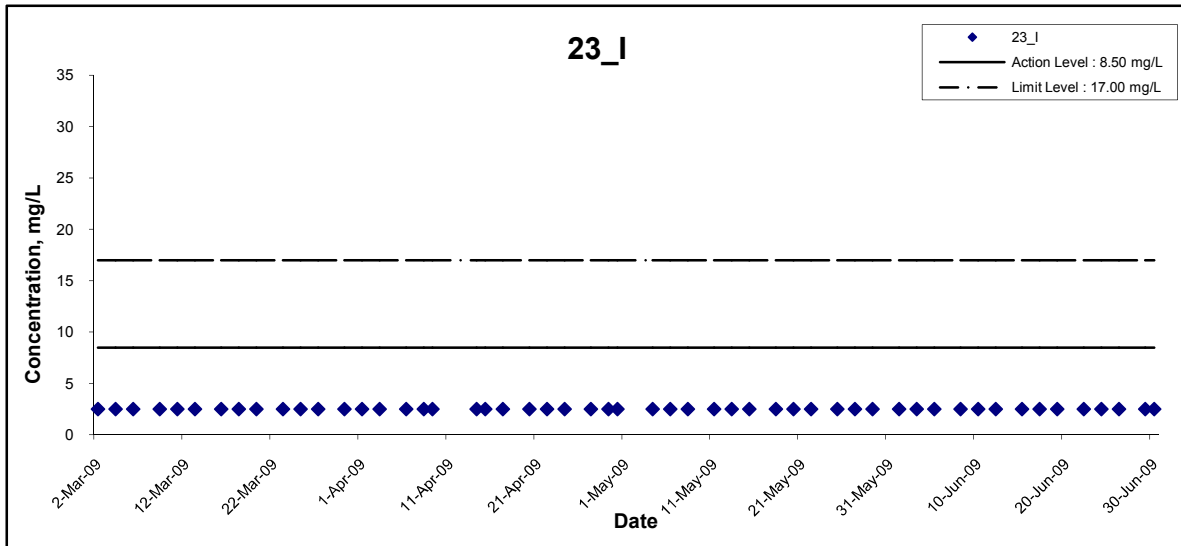




Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale N.T.S	Project No. MA6030	
	Date Jun 09	Appendix F	

Suspended Solids

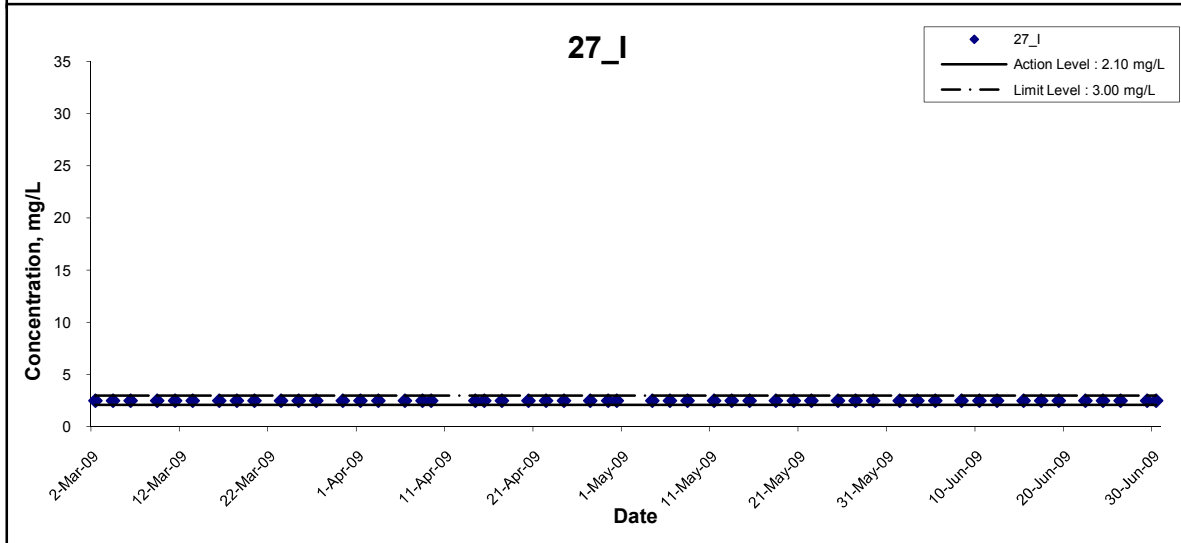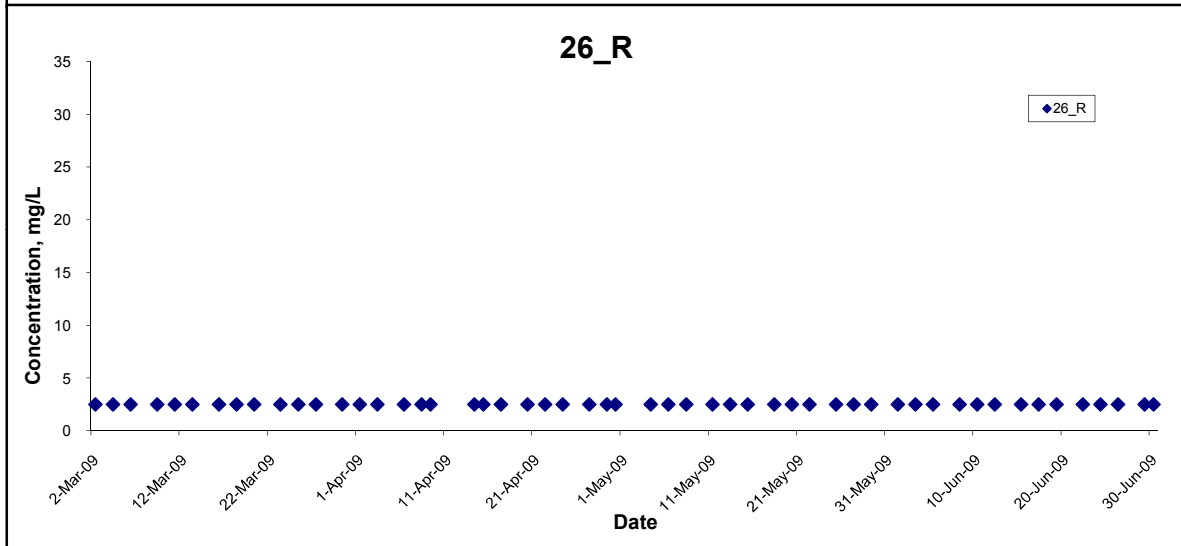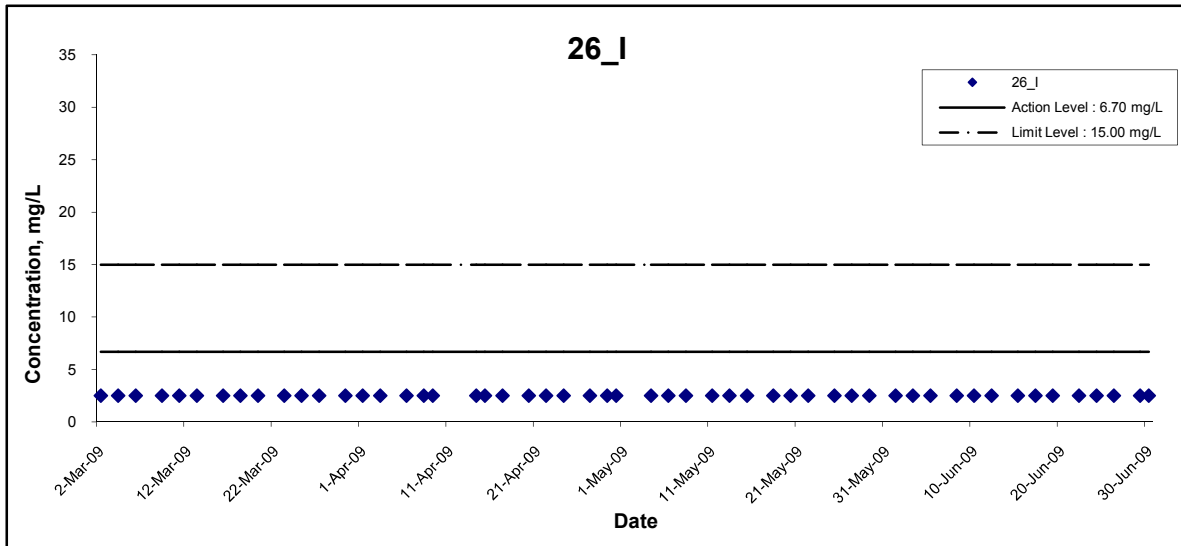




Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale N.T.S	Project No. MA6030	CINOTECH
	Date Jun 09	Appendix F	

Suspended Solids

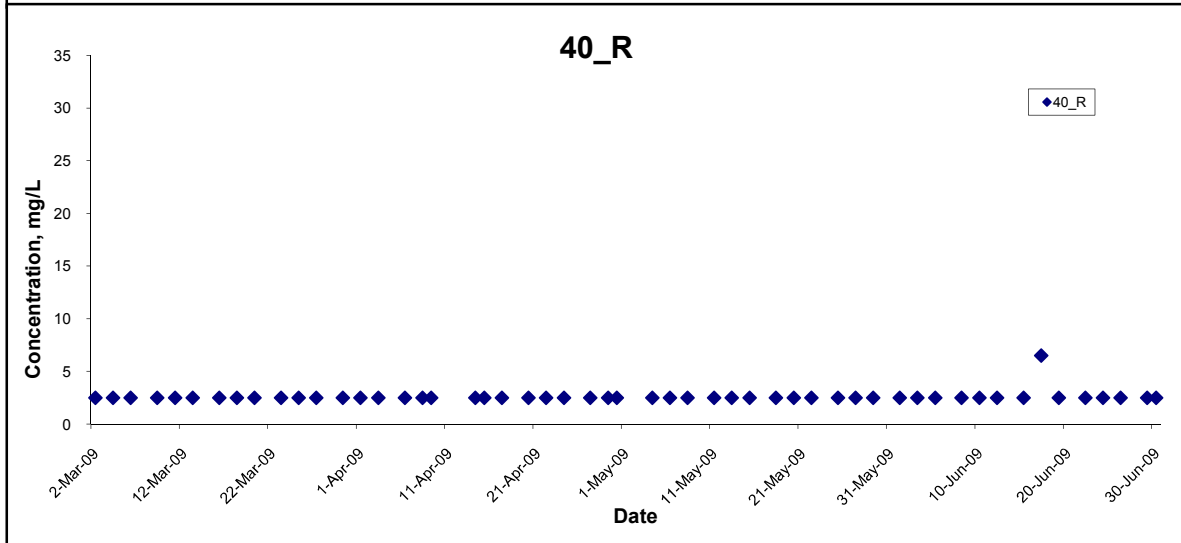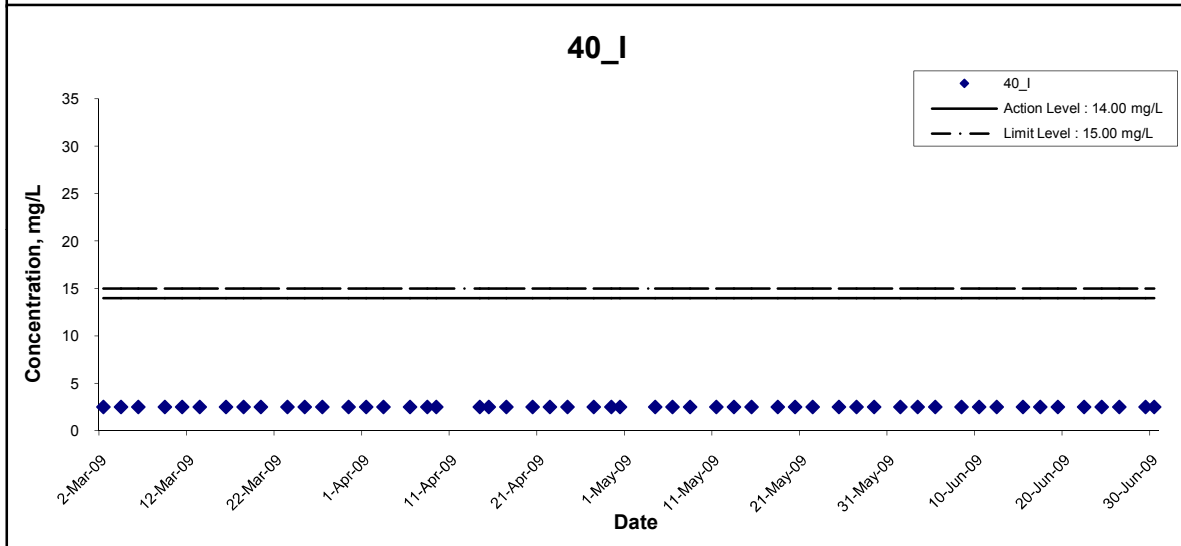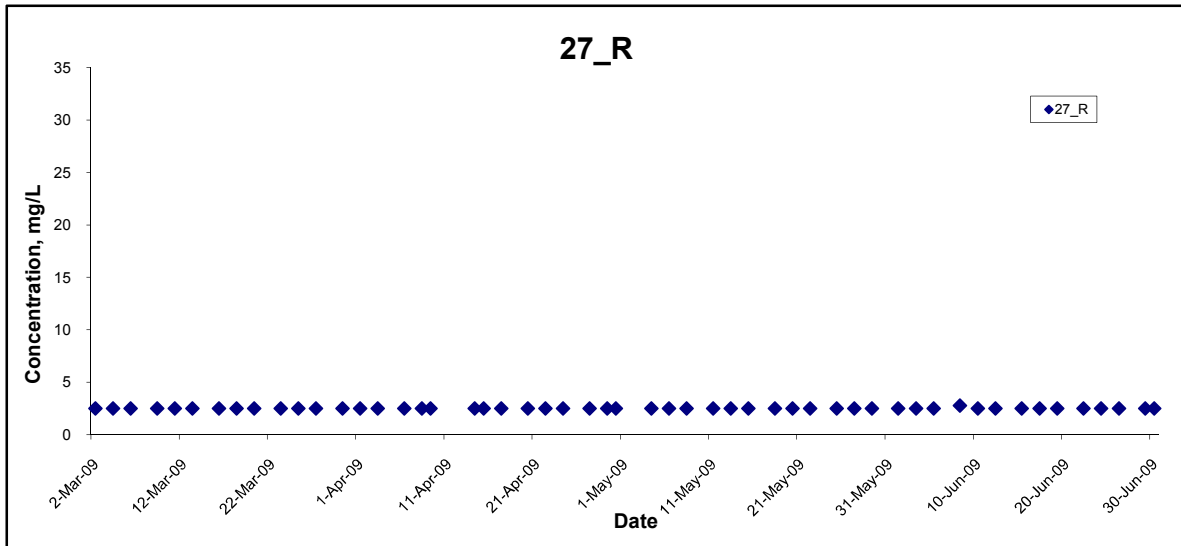


Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale N.T.S	Project No. MA6030	
	Date Jun 09	Appendix F	

Suspended Solids

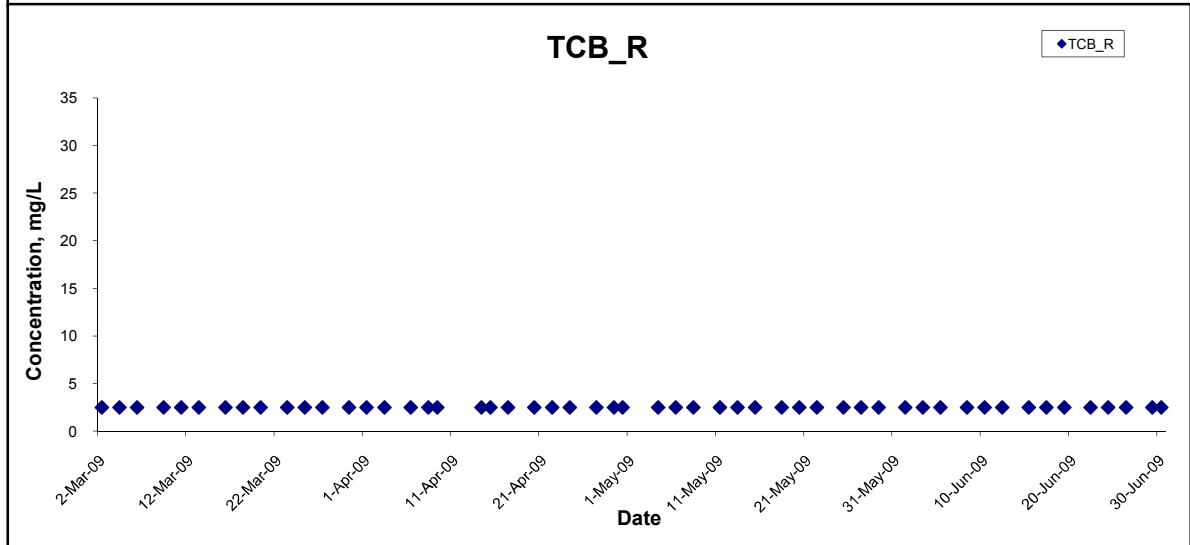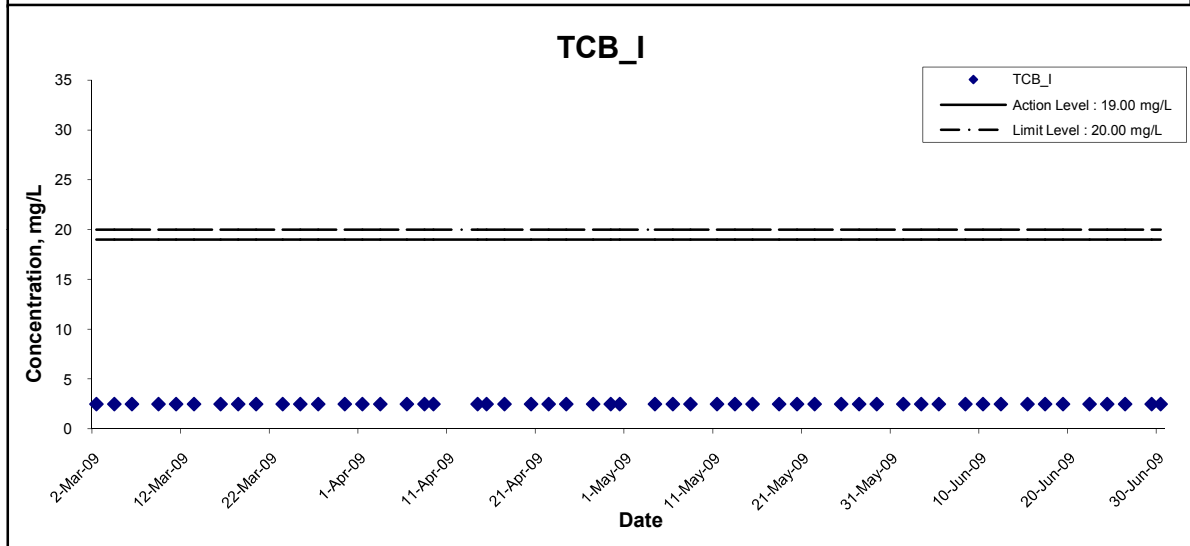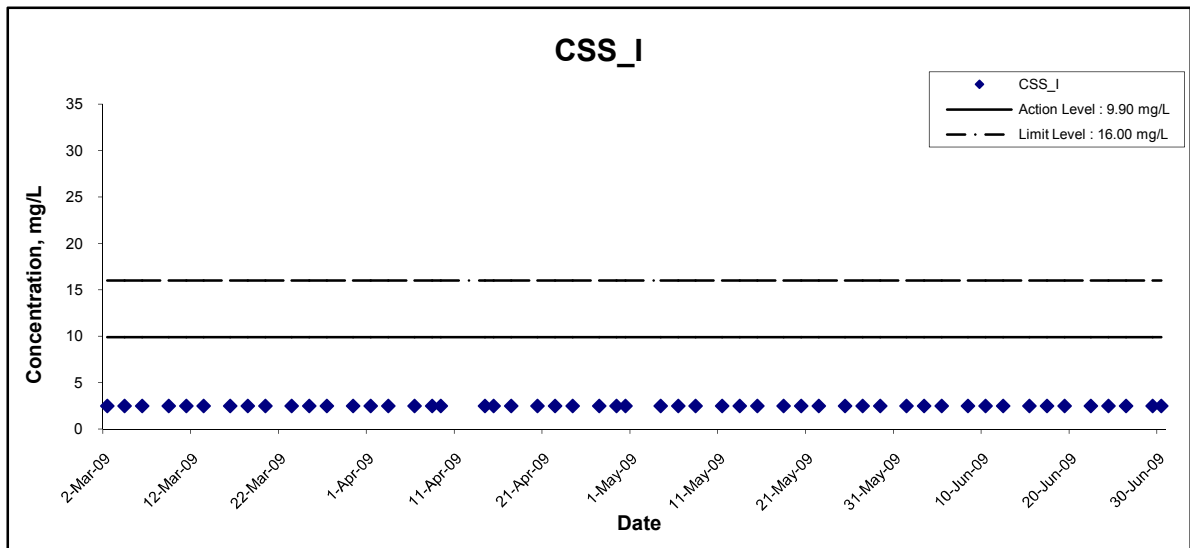

Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale N.T.S	Project No. MA6030	
	Date Jun 09	Appendix F	

Suspended Solids

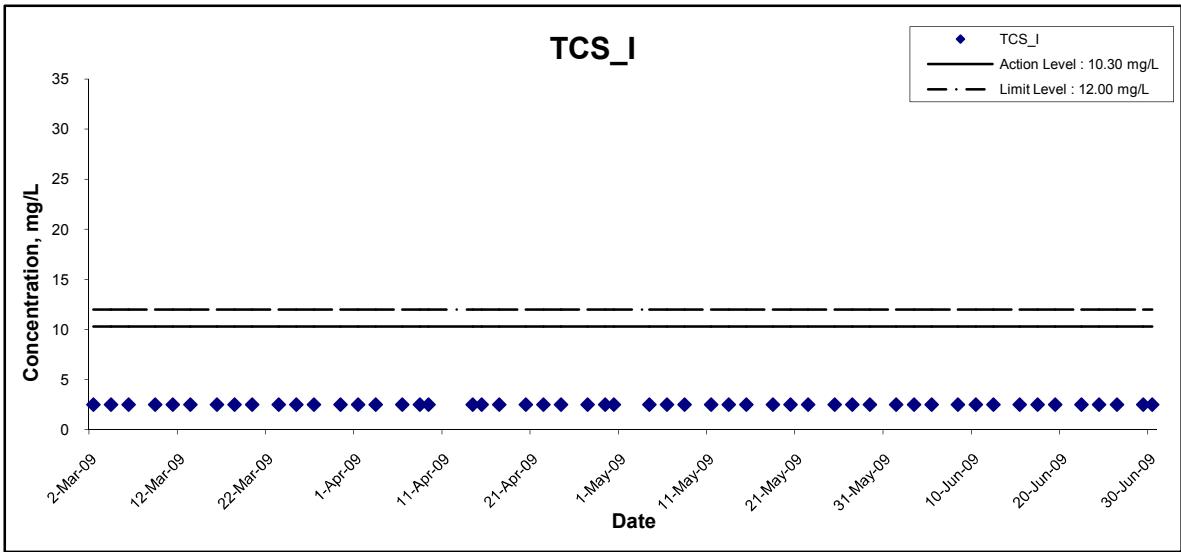

Title Contract No. HY/2003/19 Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha Graphical Presentation of Water Quality Monitoring Results	Scale N.T.S	Project No. MA6030	CINOTECH
	Date Jun 09	Appendix F	

**APPENDIX G
QUALITY CONTROL REPORTS FOR
LABORATORY ANALYSIS**

TEST REPORT
QC REPORT

APPLICANT: Cinotech Consultants Limited
RM 1710, Technology Park,
18 On Lai Street,
Shatin, N.T., Hong Kong

Laboratory No.:	08653
Date of Issue:	2009/06/02
Date Received:	2009/06/01
Date Tested:	2009/06/01
Date Completed:	2009/06/02

Page: 1 of 1

ATTN: Mr. Henry Leung

Sampling Site: Tung Chung Road
Project No.: MA6030
Sampling Date: 2009/06/01
Number of Sample: 38
Custody No.: MA6030/90601

Total Suspended Solids	Duplicate Analysis			QC Recovery, %
Sampling Point	Trial 1, mg/L	Trial 2, mg/L	Difference, %	
26_I	<2.5	<2.5	N/A	101

*****End of Report*****

PREPARED AND CHECKED BY:
For and On Behalf of **WELLAB Ltd.**



PATRICK TSE
Laboratory Manager

TEST REPORT
QC REPORT

APPLICANT: Cinotech Consultants Limited
RM 1710, Technology Park,
18 On Lai Street,
Shatin, N.T., Hong Kong

Laboratory No.:	08670
Date of Issue:	2009/06/04
Date Received:	2009/06/03
Date Tested:	2009/06/03
Date Completed:	2009/06/04

Page: 1 of 1

ATTN: Mr. Henry Leung

Sampling Site: Tung Chung Road
Project No.: MA6030
Sampling Date: 2009/06/03
Number of Sample: 38
Custody No.: MA6030/90603

Total Suspended Solids	Duplicate Analysis			QC Recovery, %
Sampling Point	Trial 1, mg/L	Trial 2, mg/L	Difference, %	
26_1	<2.5	<2.5	N/A	106

*****End of Report*****

PREPARED AND CHECKED BY:
For and On Behalf of **WELLAB Ltd.**



PATRICK TSE
Laboratory Manager

TEST REPORT
QC REPORT

APPLICANT: Cinotech Consultants Limited
RM 1710, Technology Park,
18 On Lai Street,
Shatin, N.T., Hong Kong

Laboratory No.:	08683
Date of Issue:	2009/06/08
Date Received:	2009/06/05
Date Tested:	2009/06/05
Date Completed:	2009/06/08

Page: 1 of 1

ATTN: Mr. Henry Leung

Sampling Site: Tung Chung Road
Project No.: MA6030
Sampling Date: 2009/06/05
Number of Sample: 38
Custody No.: MA6030/90605

Total Suspended Solids	Duplicate Analysis			QC Recovery, %
	Trial 1, mg/L	Trial 2, mg/L	Difference, %	
Sampling Point				
26_1	<2.5	<2.5	N/A	103

*****End of Report*****

PREPARED AND CHECKED BY:
For and On Behalf of **WELLAB Ltd.**



PATRICK TSE
Laboratory Manager

TEST REPORT
QC REPORT

APPLICANT: Cinotech Consultants Limited
RM 1710, Technology Park,
18 On Lai Street,
Shatin, N.T., Hong Kong

Laboratory No.:	08696
Date of Issue:	2009/06/09
Date Received:	2009/06/08
Date Tested:	2009/06/08
Date Completed:	2009/06/09

Page: 1 of 1

ATTN: Mr. Henry Leung

Sampling Site: Tung Chung Road
Project No.: MA6030
Sampling Date: 2009/06/08
Number of Sample: 38
Custody No.: MA6030/90608

Total Suspended Solids	Duplicate Analysis			QC Recovery, %
Sampling Point	Trial 1, mg/L	Trial 2, mg/L	Difference, %	
26_1	<2.5	<2.5	N/A	88

*****End of Report*****

PREPARED AND CHECKED BY:
For and On Behalf of **WELLAB Ltd.**



PATRICK TSE
Laboratory Manager

TEST REPORT
QC REPORT

APPLICANT: Cinotech Consultants Limited
RM 1710, Technology Park,
18 On Lai Street,
Shatin, N.T., Hong Kong

Laboratory No.:	08707
Date of Issue:	2009/06/11
Date Received:	2009/06/10
Date Tested:	2009/06/10
Date Completed:	2009/06/11
Page:	1 of 1

ATTN: Mr. Henry Leung

Sampling Site: Tung Chung Road
Project No.: MA6030
Sampling Date: 2009/06/10
Number of Sample: 38
Custody No.: MA6030/90610

Total Suspended Solids	Duplicate Analysis			QC Recovery, %
Sampling Point	Trial 1, mg/L	Trial 2, mg/L	Difference, %	
26_I	<2.5	<2.5	N/A	95

*****End of Report*****

PREPARED AND CHECKED BY:
For and On Behalf of **WELLAB Ltd.**



PATRICK TSE
Laboratory Manager

TEST REPORT
QC REPORT

APPLICANT: Cinotech Consultants Limited
RM 1710, Technology Park,
18 On Lai Street,
Shatin, N.T., Hong Kong

Laboratory No.:	08722
Date of Issue:	2009/06/15
Date Received:	2009/06/12
Date Tested:	2009/06/12
Date Completed:	2009/06/15

Page: 1 of 1

ATTN: Mr. Henry Leung

Sampling Site: Tung Chung Road
Project No.: MA6030
Sampling Date: 2009/06/12
Number of Sample: 38
Custody No.: MA6030/90612

Total Suspended Solids	Duplicate Analysis			QC Recovery, %
Sampling Point	Trial 1, mg/L	Trial 2, mg/L	Difference, %	
26_1	<2.5	<2.5	N/A	98

*****End of Report*****

PREPARED AND CHECKED BY:
For and On Behalf of **WELLAB Ltd.**



PATRICK TSE
Laboratory Manager

TEST REPORT
QC REPORT

APPLICANT: Cinotech Consultants Limited
RM 1710, Technology Park,
18 On Lai Street,
Shatin, N.T., Hong Kong

Laboratory No.:	08740
Date of Issue:	2009/06/16
Date Received:	2009/06/15
Date Tested:	2009/06/15
Date Completed:	2009/06/16

Page: 1 of 1

ATTN: Mr. Henry Leung

Sampling Site: Tung Chung Road
Project No.: MA6030
Sampling Date: 2009/06/15
Number of Sample: 38
Custody No.: MA6030/90615

Total Suspended Solids	Duplicate Analysis			QC Recovery, %
Sampling Point	Trial 1, mg/L	Trial 2, mg/L	Difference, %	
26_1	<2.5	<2.5	N/A	89

*****End of Report*****

PREPARED AND CHECKED BY:
For and On Behalf of **WELLAB Ltd.**



PATRICK TSE
Laboratory Manager

TEST REPORT
QC REPORT

APPLICANT: Cinotech Consultants Limited
RM 1710, Technology Park,
18 On Lai Street,
Shatin, N.T., Hong Kong

Laboratory No.:	08755
Date of Issue:	2009/06/18
Date Received:	2009/06/17
Date Tested:	2009/06/17
Date Completed:	2009/06/18

Page: 1 of 1

ATTN: Mr. Henry Leung

Sampling Site: Tung Chung Road
Project No.: MA6030
Sampling Date: 2009/06/17
Number of Sample: 38
Custody No.: MA6030/90617

Total Suspended Solids	Duplicate Analysis			QC Recovery, %
Sampling Point	Trial 1, mg/L	Trial 2, mg/L	Difference, %	
26_1	<2.5	<2.5	N/A	98

*****End of Report*****

PREPARED AND CHECKED BY:
For and On Behalf of **WELLAB Ltd.**



PATRICK TSE
Laboratory Manager

TEST REPORT
QC REPORT

APPLICANT: Cinotech Consultants Limited
RM 1710, Technology Park,
18 On Lai Street,
Shatin, N.T., Hong Kong

Laboratory No.:	08773
Date of Issue:	2009/06/22
Date Received:	2009/06/19
Date Tested:	2009/06/19
Date Completed:	2009/06/22

Page: 1 of 1

ATTN: Mr. Henry Leung

Sampling Site: Tung Chung Road
Project No.: MA6030
Sampling Date: 2009/06/19
Number of Sample: 38
Custody No.: MA6030/90619

Total Suspended Solids	Duplicate Analysis			QC Recovery, %
Sampling Point	Trial 1, mg/L	Trial 2, mg/L	Difference, %	
26_1	<2.5	<2.5	N/A	94

*****End of Report*****

PREPARED AND CHECKED BY:
For and On Behalf of **WELLAB Ltd.**



PATRICK TSE
Laboratory Manager

TEST REPORT
QC REPORT

APPLICANT: Cinotech Consultants Limited
RM 1710, Technology Park,
18 On Lai Street,
Shatin, N.T., Hong Kong

Laboratory No.:	08778
Date of Issue:	2009/06/23
Date Received:	2009/06/22
Date Tested:	2009/06/22
Date Completed:	2009/06/23

Page: 1 of 1

ATTN: Mr. Henry Leung

Sampling Site: Tung Chung Road
Project No.: MA6030
Sampling Date: 2009/06/22
Number of Sample: 38
Custody No.: MA6030/90622

Total Suspended Solids	Duplicate Analysis			QC Recovery, %
Sampling Point	Trial 1, mg/L	Trial 2, mg/L	Difference, %	
26_I	<2.5	<2.5	N/A	99

*****End of Report*****

PREPARED AND CHECKED BY:
For and On Behalf of **WELLAB Ltd.**



PATRICK TSE
Laboratory Manager

TEST REPORT
QC REPORT

APPLICANT: Cinotech Consultants Limited
RM 1710, Technology Park,
18 On Lai Street,
Shatin, N.T., Hong Kong

Laboratory No.:	08788
Date of Issue:	2009/06/24
Date Received:	2009/06/24
Date Tested:	2009/06/24
Date Completed:	2009/06/24

Page: 1 of 1

ATTN: Mr. Henry Leung

Sampling Site: Tung Chung Road
Project No.: MA6030
Sampling Date: 2009/06/24
Number of Sample: 38
Custody No.: MA6030/90624

Total Suspended Solids Sampling Point	Duplicate Analysis			QC Recovery, %
	Trial 1, mg/L	Trial 2, mg/L	Difference, %	
26_1	<2.5	<2.5	N/A	96

*****End of Report*****

PREPARED AND CHECKED BY:
For and On Behalf of **WELLAB Ltd.**



PATRICK TSE
Laboratory Manager

TEST REPORT
QC REPORT

APPLICANT: Cinotech Consultants Limited
RM 1710, Technology Park,
18 On Lai Street,
Shatin, N.T., Hong Kong

Laboratory No.:	08808
Date of Issue:	2009/06/29
Date Received:	2009/06/26
Date Tested:	2009/06/26
Date Completed:	2009/06/29

Page: 1 of 1

ATTN: Mr. Henry Leung

Sampling Site: Tung Chung Road
Project No.: MA6030
Sampling Date: 2009/06/26
Number of Sample: 38
Custody No.: MA6030/90626

Total Suspended Solids	Duplicate Analysis			QC Recovery, %
Sampling Point	Trial 1, mg/L	Trial 2, mg/L	Difference, %	
26_1	<2.5	<2.5	N/A	91

*****End of Report*****

PREPARED AND CHECKED BY:
For and On Behalf of **WELLAB Ltd.**



PATRICK TSE
Laboratory Manager

TEST REPORT
QC REPORT

APPLICANT: Cinotech Consultants Limited
RM 1710, Technology Park,
18 On Lai Street,
Shatin, N.T., Hong Kong

Laboratory No.:	08818
Date of Issue:	2009/06/30
Date Received:	2009/06/29
Date Tested:	2009/06/29
Date Completed:	2009/06/30

Page: 1 of 1

ATTN: Mr. Henry Leung

Sampling Site: Tung Chung Road
Project No.: MA6030
Sampling Date: 2009/06/29
Number of Sample: 38
Custody No.: MA6030/90629

Total Suspended Solids	Duplicate Analysis			QC Recovery, %
Sampling Point	Trial 1, mg/L	Trial 2, mg/L	Difference, %	
26_1	<2.5	<2.5	N/A	92

*****End of Report*****

PREPARED AND CHECKED BY:
For and On Behalf of **WELLAB Ltd.**



PATRICK TSE
Laboratory Manager

TEST REPORT
QC REPORT

APPLICANT: Cinotech Consultants Limited
RM 1710, Technology Park,
18 On Lai Street,
Shatin, N.T., Hong Kong

Laboratory No.:	08826
Date of Issue:	2009/07/02
Date Received:	2009/06/30
Date Tested:	2009/06/30
Date Completed:	2009/07/02

Page: 1 of 1

ATTN: Mr. Henry Leung

Sampling Site: Tung Chung Road
Project No.: MA6030
Sampling Date: 2009/06/30
Number of Sample: 38
Custody No.: MA6030/90630

Total Suspended Solids	Duplicate Analysis			QC Recovery, %
Sampling Point	Trial 1, mg/L	Trial 2, mg/L	Difference, %	
26_1	<2.5	<2.5	N/A	87

*****End of Report*****

PREPARED AND CHECKED BY:
For and On Behalf of **WELLAB Ltd.**



PATRICK TSE
Laboratory Manager

APPENDIX H
SUMMARY OF EXCEEDANCES

Contract No. HY/2003/19**Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha - Exceedance Report****Report No. 90605W_90601_S****Part A – Exceedance Summary Tables****Table 1: Parameter – Suspended Solids (mg/L)**

Stream Location	Measured Value	Exceedances Criteria				Action / Limit Levels	Justification*	Validity (Y/N)	Action Taken (Y/N)
		Action value	120% of Reference value*	Limit Value	130% of Reference Value*				
27_I	2.5	2.1	3.0	3.0	3.25	Action	(2) & (4)	N	N

- *Remarks
- (1) – No construction activity was observed.
 - (2) – No pollution discharge from construction activity was observed.
 - (3) – Natural humus or mosses was observed.
 - (4) – Reference point value already exceeded either the Action or Limit Levels.

Contract No. HY/2003/19
Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha - Exceedance Report
Report No. 90605W_90603_S

Part A – Exceedance Summary Tables

Table 1: Parameter – Suspended Solids (mg/L)

Stream Location	Measured Value	Exceedances Criteria				Action / Limit Levels	Justification *	Validity (Y/N)	Action Taken (Y/N)
		Action value	120% of Reference value *	Limit Value	130% of Reference Value *				
27_I	2.5	2.1	3.0	3.0	3.25	Action	(2) & (4)	N	N

- *Remarks
- (1) – No construction activity was observed.
 - (2) – No pollution discharge from construction activity was observed.
 - (3) – Natural humus or mosses was observed.
 - (4) – Reference point value already exceeded either the Action or Limit Levels.

Contract No. HY/2003/19
Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha - Exceedance Report
Report No. 90609W_90605_S

Part A – Exceedance Summary Tables

Table 1: Parameter – Suspended Solids (mg/L)

Stream Location	Measured Value	Exceedances Criteria				Action / Limit Levels	Justification *	Validity (Y/N)	Action Taken (Y/N)
		Action value	120% of Reference value *	Limit Value	130% of Reference Value *				
27_I	2.5	2.1	3.0	3.0	3.25	Action	(2) & (4)	N	N

- *Remarks
- (1) – No construction activity was observed.
 - (2) – No pollution discharge from construction activity was observed.
 - (3) – Natural humus or mosses was observed.
 - (4) – Reference point value already exceeded either the Action or Limit Levels.

Contract No. HY/2003/19**Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha - Exceedance Report****Report No. 90615W_90608_S****Part A – Exceedance Summary Tables****Table 1: Parameter – Suspended Solids (mg/L)**

Stream Location	Measured Value	Exceedances Criteria				Action / Limit Levels	Justification *	Validity (Y/N)	Action Taken (Y/N)
		Action value	120% of Reference value *	Limit Value	130% of Reference Value *				
27_I	2.5	2.1	3.0	3.0	3.25	Action	(2) & (4)	N	N

- *Remarks
- (1) – No construction activity was observed.
 - (2) – No pollution discharge from construction activity was observed.
 - (3) – Natural humus or mosses was observed.
 - (4) – Reference point value already exceeded either the Action or Limit Levels.

Contract No. HY/2003/19
Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha - Exceedance Report
Report No. 90615W_90610_S

Part A – Exceedance Summary Tables

Table 1: Parameter – Suspended Solids (mg/L)

Stream Location	Measured Value	Exceedances Criteria				Action / Limit Levels	Justification *	Validity (Y/N)	Action Taken (Y/N)
		Action value	120% of Reference value *	Limit Value	130% of Reference Value *				
27_I	2.5	2.1	3.0	3.0	3.25	Action	(2) & (4)	N	N

- *Remarks
- (1) – No construction activity was observed.
 - (2) – No pollution discharge from construction activity was observed.
 - (3) – Natural humus or mosses was observed.
 - (4) – Reference point value already exceeded either the Action or Limit Levels.

Contract No. HY/2003/19
Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha - Exceedance Report
Report No. 90619W_90612_S

Part A – Exceedance Summary Tables

Table 1: Parameter – Suspended Solids (mg/L)

Stream Location	Measured Value	Exceedances Criteria				Action / Limit Levels	Justification *	Validity (Y/N)	Action Taken (Y/N)
		Action value	120% of Reference value *	Limit Value	130% of Reference Value *				
27_I	2.5	2.1	3.0	3.0	3.25	Action	(2) & (4)	N	N

- *Remarks
- (1) – No construction activity was observed.
 - (2) – No pollution discharge from construction activity was observed.
 - (3) – Natural humus or mosses was observed.
 - (4) – Reference point value already exceeded either the Action or Limit Levels.

Contract No. HY/2003/19
Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha - Exceedance Report
Report No. 90619W_90615_S

Part A – Exceedance Summary Tables

Table 1: Parameter – Suspended Solids (mg/L)

Stream Location	Measured Value	Exceedances Criteria				Action / Limit Levels	Justification *	Validity (Y/N)	Action Taken (Y/N)
		Action value	120% of Reference value *	Limit Value	130% of Reference Value *				
27_I	2.5	2.1	3.0	3.0	3.25	Action	(2) & (4)	N	N

- *Remarks
- (1) – No construction activity was observed.
 - (2) – No pollution discharge from construction activity was observed.
 - (3) – Natural humus or mosses was observed.
 - (4) – Reference point value already exceeded either the Action or Limit Levels.

Contract No. HY/2003/19
Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha - Exceedance Report
Report No. 90622W_90617_S

Part A – Exceedance Summary Tables

Table 1: Parameter – Suspended Solids (mg/L)

Stream Location	Measured Value	Exceedances Criteria				Action / Limit Levels	Justification*	Validity (Y/N)	Action Taken (Y/N)
		Action value	120% of Reference value*	Limit Value	130% of Reference Value*				
27_I	2.5	2.1	3.0	3.0	3.25	Action	(2) & (4)	N	N

- *Remarks
- (1) – No construction activity was observed.
 - (2) – No pollution discharge from construction activity was observed.
 - (3) – Natural humus or mosses was observed.
 - (4) – Reference point value already exceeded either the Action or Limit Levels.

Contract No. HY/2003/19
Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha - Exceedance Report
Report No. 90624W_90619_S

Part A – Exceedance Summary Tables

Table 1: Parameter – Suspended Solids (mg/L)

Stream Location	Measured Value	Exceedances Criteria				Action / Limit Levels	Justification *	Validity (Y/N)	Action Taken (Y/N)
		Action value	120% of Reference value *	Limit Value	130% of Reference Value *				
27_I	2.5	2.1	3.0	3.0	3.25	Action	(2) & (4)	N	N

- *Remarks
- (1) – No construction activity was observed.
 - (2) – No pollution discharge from construction activity was observed.
 - (3) – Natural humus or mosses was observed.
 - (4) – Reference point value already exceeded either the Action or Limit Levels.

Contract No. HY/2003/19
Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha - Exceedance Report
Report No. 90624W_90622_S

Part A – Exceedance Summary Tables

Table 1: Parameter – Suspended Solids (mg/L)

Stream Location	Measured Value	Exceedances Criteria				Action / Limit Levels	Justification *	Validity (Y/N)	Action Taken (Y/N)
		Action value	120% of Reference value *	Limit Value	130% of Reference Value *				
27_I	2.5	2.1	3.0	3.0	3.25	Action	(2) & (4)	N	N

- *Remarks
- (1) – No construction activity was observed.
 - (2) – No pollution discharge from construction activity was observed.
 - (3) – Natural humus or mosses was observed.
 - (4) – Reference point value already exceeded either the Action or Limit Levels.

Contract No. HY/2003/19
Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha - Exceedance Report
Report No. 90703W_90624_S

Part A – Exceedance Summary Tables

Table 1: Parameter – Suspended Solids (mg/L)

Stream Location	Measured Value	Exceedances Criteria				Action / Limit Levels	Justification *	Validity (Y/N)	Action Taken (Y/N)
		Action value	120% of Reference value *	Limit Value	130% of Reference Value *				
27_I	2.5	2.1	3.0	3.0	3.25	Action	(2) & (4)	N	N

- *Remarks
- (1) – No construction activity was observed.
 - (2) – No pollution discharge from construction activity was observed.
 - (3) – Natural humus or mosses was observed.
 - (4) – Reference point value already exceeded either the Action or Limit Levels.

Contract No. HY/2003/19
Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha - Exceedance Report
Report No. 90703W_90626_S

Part A – Exceedance Summary Tables

Table 1: Parameter – Suspended Solids (mg/L)

Stream Location	Measured Value	Exceedances Criteria				Action / Limit Levels	Justification*	Validity (Y/N)	Action Taken (Y/N)
		Action value	120% of Reference value*	Limit Value	130% of Reference Value*				
27_I	2.5	2.1	3.0	3.0	3.25	Action	(2) & (4)	N	N

- *Remarks
- (1) – No construction activity was observed.
 - (2) – No pollution discharge from construction activity was observed.
 - (3) – Natural humus or mosses was observed.
 - (4) – Reference point value already exceeded either the Action or Limit Levels.

Contract No. HY/2003/19
Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha - Exceedance Report
Report No. 90707W_90629_S

Part A – Exceedance Summary Tables

Table 1: Parameter – Suspended Solids (mg/L)

Stream Location	Measured Value	Exceedances Criteria				Action / Limit Levels	Justification *	Validity (Y/N)	Action Taken (Y/N)
		Action value	120% of Reference value *	Limit Value	130% of Reference Value *				
27_I	2.5	2.1	3.0	3.0	3.25	Action	(2) & (4)	N	N

- *Remarks
- (1) – No construction activity was observed.
 - (2) – No pollution discharge from construction activity was observed.
 - (3) – Natural humus or mosses was observed.
 - (4) – Reference point value already exceeded either the Action or Limit Levels.

Contract No. HY/2003/19**Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha - Exceedance Report****Report No. 90707W_90630_S****Part A – Exceedance Summary Tables****Table 1: Parameter – Suspended Solids (mg/L)**

Stream Location	Measured Value	Exceedances Criteria				Action / Limit Levels	Justification*	Validity (Y/N)	Action Taken (Y/N)
		Action value	120% of Reference value*	Limit Value	130% of Reference Value*				
27_I	2.5	2.1	3.0	3.0	3.25	Action	(2) & (4)	N	N

- *Remarks
- (1) – No construction activity was observed.
 - (2) – No pollution discharge from construction activity was observed.
 - (3) – Natural humus or mosses was observed.
 - (4) – Reference point value already exceeded either the Action or Limit Levels.

**APPENDIX I
SITE AUDIT SUMMARY**

Weekly Site Inspection Record Summary

Inspection Information

Checklist Reference Number	90604
Date	04 June 2009 (Thursday)
Time	09:00 – 13:15



Ref. No.	Non-Compliance	Related Item No.
-	None identified	-
Ref. No.	Remarks/Observations	Related Item No.
	A. Water Quality	
90604-O03	<ul style="list-style-type: none"> Silt and sediment was observed discharging to the catchwater from the exposed slope especially at underneath STR 17, 18. The Contractor was reminded to cover/hydroseed the exposed slope immediately especially during rainstorm. 	B8
90604-O04	<ul style="list-style-type: none"> Stream water at Stream 20 was observed diverted properly around the works. The Contractor was reminded to review and re-arrange the stream diversion to prevent any wastewater discharging out. 	B15
90604-O05	<ul style="list-style-type: none"> Seepage of silty water from the hole of concrete bund was observed at SD5-11. The Contractor was reminded to provide mitigation measures to prevent any wastewater from discharging to the downstream. 	B15
90604-O06	<ul style="list-style-type: none"> Concrete debris was observed at Stream 21 due to the concrete breaking before. The Contractor was reminded to clear the debris and ensure the stream water in good condition 	B15
	B. Air Quality	
	<ul style="list-style-type: none"> No environmental deficiency was identified during site inspection. 	
	C. Noise	
	<ul style="list-style-type: none"> No environmental deficiency was identified during site inspection. 	
	D. Waste / Chemical Management	
90604-O01	<ul style="list-style-type: none"> Empty oil containers were observed at underneath STR 7, near Stream 20, 21 and SD4-7. The Contractor was reminded to dispose them as chemical waste. 	E2ii.
90604-O02	<ul style="list-style-type: none"> Discarded hose were observed at Shan Shek Wan. The Contractor was reminded to clear them. 	E4ii.
	E. Ecology	
	<ul style="list-style-type: none"> No environmental deficiency was identified during site inspection. 	
	F. Others	
	<ul style="list-style-type: none"> All environmental deficiencies identified in previous audit session were not improved/ rectified by the Contractor. Follow-up action is needed for the outstanding items. Item 90527-R19 was not observed during the site inspection. 	

	Reminders	Related Item No.
	The Contractor was reminded to implement the following preventive measures:	
	A. Water Quality	
90604-R07	<ul style="list-style-type: none"> Provide sand bag at the culvert at Shan Shek Wan. 	B2
90604-R12	<ul style="list-style-type: none"> Clear the construction waste, silt, debris and sediment in the culvert and U-channel along Tung Chung Road (Southern and Northern Sections) especially at STR17, Shan Shek Wan, CH7000, near Stream 20, Pak Kung Au, SD7-13, SD6-12, SD5-11, SD4-7 and underneath STR7. 	B1 and B18
90604-R17	<ul style="list-style-type: none"> Properly cover/compact the exposed area at between Stream 20 and 19, near stream 21, SD4-7, SD6-12 and underneath STR 14 when the works were not undertaken. 	B8
90604-R18	<ul style="list-style-type: none"> Clear the stagnant water at the wheel washing bay (abandoned) at Site Office, pit area at near SD7-13 and the hole for handrail along Southern Section of Tung Chung Road. 	B11

Weekly Site Inspection Record Summary

	B. Air Quality	
90604-R10	<ul style="list-style-type: none"> Properly maintain the slopes which have been hydroseeded along Tung Chung Road (Southern and Northern Section) especially after the rainstorm. 	C13
	C. Waste / Chemical Management	
90604-R08	<ul style="list-style-type: none"> Clear C&D waste and discarded cement bags at underneath STR7. 	E4ii.
90604-R09	<ul style="list-style-type: none"> Clear general refuse at underneath STR7. 	E1iii
90604-R11	<ul style="list-style-type: none"> Clear the discarded "protection material for hydroseed" that was hanging on the trees along Southern Section of Tung Chung Road. 	E4ii
90604-R13	<ul style="list-style-type: none"> Clear C&D waste at near SD7-13, SD6-12, SD5-11 and SD4-7. 	E4ii.
90604-R15	<ul style="list-style-type: none"> Clear vegetation waste along Tung Chung Road especially near the catchwater. 	E4ii.
90604-R16	<ul style="list-style-type: none"> Keep clear and sort C&D waste at Shan Shek Wan. 	E4ii
	D. Ecology	
90604-R14	<ul style="list-style-type: none"> Clear C&D waste and general refuse at Stream 21, 22, 27, 30, 34 and 36-38. 	F1
	E. General	
90604-G19	<ul style="list-style-type: none"> Provide mitigation measures at between the outstanding construction area and paved road to prevent any mud from carrying to the public road. 	B2 and C2

Ref. No.	Proposed Completion Date	Completion Date	Remarks
90604-O01	10 June 2009		
90604-O02			
90604-O03			
90604-O04			
90604-O05			
90604-O06			
90604-R07			
90604-R08			
90604-R09			
90604-R10			
90604-R11			
90604-R12			
90604-R13			
90604-R14			
90604-R15			
90604-R16			
90604-R17			
90604-R18			
90604-G19			

	Name	Signature	Date
Recorded by	Ivy Tam		4 June 2009
Checked by	Dr. Priscilla Choy		4 June 2009

Weekly Site Inspection Record Summary

Inspection Information

Checklist Reference Number	90610
Date	10 June 2009 (Wednesday)
Time	09:00 – 13:15

Ref. No.	Non-Compliance	Related Item No.
-	None identified	-
Ref. No.	Remarks/Observations	Related Item No.
	A. Water Quality	
90610-003	• Silt and sediment was observed discharging to the catchwater from the exposed slope due to the soil erosion especially at underneath STR 16, 17 and 18. The Contractor was reminded to provide mitigation measures to protect the slope (In-progress).	B8
90610-004	• Stream water at Stream 20 was observed not diverted properly around the works. The Contractor was reminded to review and re-arrange the stream diversion to prevent any wastewater discharging out.	B15
90610-005	• Seepage of silty water from the hole of concrete bund was observed at SD5-11. The Contractor was reminded to provide mitigation measures to prevent any silty water from discharging to the downstream.	B15
90610-006	• Concrete debris was observed at Steam 21 due to the concrete breaking before. The Contractor was reminded to clear the debris and ensure the stream water in good condition	B15
	B. Air Quality	
	• No environmental deficiency was identified during site inspection.	
	C. Noise	
	• No environmental deficiency was identified during site inspection.	
	D. Waste / Chemical Management	
90610-001	• Empty oil containers were observed at underneath STR 7, near Stream 20, 21 and SD4-7. The Contractor was reminded to dispose them as chemical waste.	E2ii.
90610-002	• Discarded hose were observed at Shan Shek Wan. The Contractor was reminded to clear them.	E4ii.
	E. Ecology	
	• No environmental deficiency was identified during site inspection.	
	F. Others	
	• All environmental deficiencies identified in previous audit session were not improved/ rectified by the Contractor except item 90604-R09. Follow-up action is needed for the outstanding items.	

	Reminders	Related Item No.
	The Contractor was reminded to implement the following preventive measures:	
	A. Water Quality	
90610-R07	• Provide sand bag at the culvert at Shan Shek Wan.	B2
90610-R12	• Clear the construction waste, silt, debris and sediment in the culvert and U-channel along Tung Chung Road (Southern and Northern Sections) especially at STR17, Shan Shek Wan, CH7000, near Stream 20, Pak Kung Au, SD7-13, SD6-12, SD5-11, SD4-7 and underneath STR7.	B1 and B18

Weekly Site Inspection Record Summary



90610-R17	<ul style="list-style-type: none"> Properly cover/compact the exposed area at between Stream 20 and 19, near stream 21, SD4-7, SD6-12 and underneath STR 14 after the links. 	B8
90610-R18	<ul style="list-style-type: none"> Clear the standing water at the wheel washing bay (abandoned) at Site Office, pit area at near SD7-13 and the hole for handrail along Southern Section of Tung Chung Road. 	B11
90610-R19	<ul style="list-style-type: none"> Properly maintain the sand bag bund at near stream 20. 	B15
90610-R21	<ul style="list-style-type: none"> Provide mosquito larvicide for the stagnant water at Shan Shek Wan 	B11
	B. Air Quality	
90610-R10	<ul style="list-style-type: none"> Properly maintain the slopes which have been hydroseeded along Tung Chung Road (Southern and Northern Section) especially after the rainstorm. 	C13
90610-R20	<ul style="list-style-type: none"> Provide mitigation measures to prevent dust emission during cement de-bagging works and clean the remaining cement after the works at SD 4-7. 	C7
	C. Waste / Chemical Management	
90610-R08	<ul style="list-style-type: none"> Clear C&D waste and discarded cement bags at underneath STR7. 	E4ii.
90610-R09	<ul style="list-style-type: none"> Clear oil stain at underneath STR7. 	E1iii
90610-R11	<ul style="list-style-type: none"> Clear the discarded "protection material for hydroseed" that was hanging on the trees along Southern Section of Tung Chung Road. 	E4ii
90610-R13	<ul style="list-style-type: none"> Clear C&D waste at near SD7-13, SD6-12, SD5-11 and SD4-7. 	E4ii.
90610-R15	<ul style="list-style-type: none"> Clear vegetation waste along Tung Chung Road especially near the catchwater. 	E4ii.
90610-R16	<ul style="list-style-type: none"> Keep clear and sort C&D waste at Shan Shek Wan. 	E4ii
	D. Ecology	
90610-R14	<ul style="list-style-type: none"> Clear C&D waste and general refuse at Stream 21, 22, 27, 30, 34 and 36-38. 	F1
	E. General	
90610-G22	<ul style="list-style-type: none"> Provide mitigation measures at between the outstanding construction area and paved road to prevent any mud from carrying to the public road. 	B2 and C3

Ref. No.	Proposed Completion Date	Completion Date	Remarks
90604-R09	10 June 2009	10 June 2009	
90610-O01			
90610-O02			
90610-O03			
90610-O04			
90610-O05			
90610-O06			
90610-R07			
90610-R08			
90610-R09			
90610-R10			
90610-R11			
90610-R12	18 June 2009		
90610-R13			
90610-R14			
90610-R15			
90610-R16			
90610-R17			
90610-R18			
90610-R19			
90610-R20			
90610-R21			
90610-G22			

Contract No. HY/2003/19

Improvement to Tung Chung Road Between Lung Tseng Tau and Cheung Sha

Weekly Site Inspection Record Summary

	Name	Signature	Date
Recorded by	Tony Ng		10 June 2009
Checked by	Dr. Priscilla Choy		10 June 2009

Weekly Site Inspection Record Summary

Inspection Information

Checklist Reference Number	90618
Date	18 June 2009 (Thursday)
Time	09:00 – 13:30

Ref. No.	Non-Compliance	Related Item No.
-	None identified	-
Ref. No.	Remarks/Observations	Related Item No.
	A. Water Quality	
90618-003	• Soil erosion was observed at STR 16, 17, 18 and near Stream 35. The Contractor was reminded to provide mitigation measures to protect the slope. (In – progress).	B8
90618-004	• Stream water at Stream 20 was observed not diverted properly around the works. The Contractor was reminded to review and re-arrange the stream diversion to prevent any wastewater discharging out.	B15
90618-005	• Sediment was observed from discharging to the culverts at SD5-11 and SD6-12. The Contractor was reminded to clear the culvert and provide mitigation measures to prevent further sediment from discharging to the culvert.	B18
	B. Air Quality	
	• No environmental deficiency was identified during site inspection.	
	C. Noise	
	• No environmental deficiency was identified during site inspection.	
	D. Waste / Chemical Management	
90618-001	• Empty oil containers were observed at underneath STR 7, near Stream 20, 21 and SD4-7. The Contractor was reminded to dispose them as chemical waste.	E2ii.
90618-002	• Discarded hose were observed at Shan Shek Wan. The Contractor was reminded to clear them.	E4ii.
	E. Ecology	
	• No environmental deficiency was identified during site inspection.	
	F. Others	
	• All environmental deficiencies identified in previous audit session were not improved/ rectified by the Contractor except item 90610-R05 and R06. Follow-up action is needed for the outstanding items.	

	Reminders	Related Item No.
	The Contractor was reminded to implement the following preventive measures:	
	A. Water Quality	
90618-R06	• Provide sand bag at the culvert at Shan Shek Wan.	B2
90618-R08	• Clear oil stain at underneath STR7.	B8
90618-R11	• Clear the construction waste, silt, debris and sediment in the culvert and U-channel along Tung Chung Road (Southern and Northern Sections) especially at STR17, Shan Shek Wan, CH7000, near Stream 20, Pak Kung Au, SD7-13, SD6-12, SD5-11, SD4-7 and underneath STR7.	B1 and B18
90618-R16	• Properly cover/compact the exposed area at between Stream 20 and 19, near stream 21, SD4-7, SD6-12 and underneath STR 7 and STR 14 after the works.	B8
90618-R17	• Clear the standing water at the wheel washing bay (abandoned) at Site Office, pit area at near SD7-13.	B11
90618-R18	• Properly maintain the sand bag bund at near Stream 20.	B15

Weekly Site Inspection Record Summary



90618-R20	• Provide mosquito larvicide for the stagnant water at Shan Shek Wan .	B11
	B. Air Quality	
90618-R09	• Properly maintain the slopes which have been hydroseeded along Tung Chung Road (Southern and Northern Section) especially after the rainstorm.	C13
90618-R19	• Provide mitigation measures to prevent dust emission during cement de-bagging works and clean the remaining cement after the works at SD 4-7 .	C7
	C. Waste / Chemical Management	
90618-R07	• Clear C&D waste and discarded cement bags at underneath STR7 .	E4ii.
90618-R08	• Clear oil stain at underneath STR7 .	E7i
90618-R10	• Clear the discarded "protection material for hydroseed" that was hanging on the trees along Southern Section of Tung Chung Road .	E4ii
90618-R12	• Clear C&D waste and sediment at SD6-12, SD5-11 and SD4-7 .	E4ii.
90618-R14	• Clear vegetation waste along Tung Chung Road especially near the catchwater and underneath STR 7 .	E4ii.
90618-R15	• Keep clear and sort C&D waste at Shan Shek Wan .	E4ii
	D. Ecology	
90618-R13	• Clear C&D waste and general refuse at Stream 21, 22, 27, 30, 34 and 36-38 .	F1
	E. General	
90618-G21	• Provide mitigation measures at between the outstanding construction area and paved road to at SD6-12, Stream 20 and 21 , site office to prevent any mud from carrying to the public road.	B2 and C3

Ref. No.	Proposed Completion Date	Completion Date	Remarks
90610-O05	18 June 2009	18 June 2009	
90610-O06			
90618-O01			
90618-O02			
90618-O03			
90618-O04			
90618-O05			
90618-R06			
90618-R07			
90618-R08			
90618-R09			
90618-R10			
90618-R11	25 June 2009		
90618-R12			
90618-R13			
90618-R14			
90618-R15			
90618-R16			
90618-R17			
90618-R18			
90618-R19			
90618-R20			
90618-G21			

Contract No. HY/2003/19

Improvement to Tung Chung Road Between Lung Tseng Tau and Cheung Sha

Weekly Site Inspection Record Summary

	Name	Signature	Date
Recorded by	Tony Ng		18 June 2009
Checked by	Dr. Priscilla Choy		18 June 2009

Weekly Site Inspection Record Summary

Inspection Information

Checklist Reference Number	90625
Date	25 June 2009 (Thursday)
Time	09:00 – 13:30

Ref. No.	Non-Compliance	Related Item No.
-	None identified	-
Ref. No.	Remarks/Observations	Related Item No.
	A. Water Quality	
90625-003	• Soil erosion was observed at STR 16, 17, 18 and near Stream 35. The Contractor was reminded to provide mitigation measures to protect the slope. (In – progress).	B8
90625-004	• Stream water at Stream 20 was observed not diverted properly around the works. The Contractor was reminded to review and re-arrange the stream diversion to prevent any wastewater discharging out.	B15
90625-005	• Silty water was observed at Stream 23. However, the silty water was due to the broken water pipe from other construction site at old Tung Chung Road. The item was also observed to be rectified during the site inspection.	B3
	B. Air Quality	
	• No environmental deficiency was identified during site inspection.	
	C. Noise	
	• No environmental deficiency was identified during site inspection.	
	D. Waste / Chemical Management	
90625-001	• Empty oil containers were observed at underneath STR 7, near Stream 20, 21 and SD4-7. The Contractor was reminded to dispose them as chemical waste.	E2ii.
90625-002	• Discarded hose were observed at Shan Shek Wan. The Contractor was reminded to clear them.	E4ii.
	E. Ecology	
	• No environmental deficiency was identified during site inspection.	
	F. Others	
	• All environmental deficiencies identified in previous audit session were not improved/ rectified by the Contractor except item 90618-005 and R08. Follow-up action is needed for the outstanding items.	

	Reminders	Related Item No.
	The Contractor was reminded to implement the following preventive measures:	
	A. Water Quality	
90625-R06	• Provide sand bag at the culvert at Shan Shek Wan.	B2
90625-R10	• Clear the construction waste, silt, debris and sediment in the culvert and U-channel along Tung Chung Road (Southern and Northern Sections) especially at STR17, Shan Shek Wan, CH7000, near Stream 20, Pak Kung Au, SD7-13, SD6-12, SD5-11, SD4-7 and underneath STR7.	B1 and B18
90625-R15	• Properly cover/compact the exposed area at between Stream 20 and 19, near stream 19, 21, SD4-7, SD5-11, SD6-12 and underneath STR 7 and STR 14 after the works.	B8
90625-R16	• Clear the standing water at the wheel washing bay (abandoned) at Site Office and Stream 21.	B11
90625-R17	• Properly maintain the sand bag bund at near Stream 20. (In-progress)	B15
90625-R19	• Provide mosquito larvicide for the stagnant water at Shan Shek Wan.	B11
90625-R20	• Provide mitigation measures to prevent silty water flowing to the culvert at SD4-7.	B4

Weekly Site Inspection Record Summary

	B. Air Quality	
90625-R08	• Properly maintain the slopes which have been hydroseeded along Tung Chung Road (Southern and Northern Section) especially after the rainstorm.	C13
90625-R18	• Provide mitigation measures to prevent dust emission during cement de-bagging works and clean the remaining cement after the works at SD 4-7.	C7
	C. Waste / Chemical Management	
90625-R07	• Discarded cement bag's at underneath STR7.	E4ii.
90625-R09	• Clear the discarded "protection material for hydroseed" that was hanging on the trees along Southern Section of Tung Chung Road.	E4ii
90625-R11	• Clear C&D waste and sediment at SD6-12, SD5-11, SD4-7 and Stream 20.	E4ii.
90625-R13	• Clear vegetation waste along Tung Chung Road especially near the catchwater and underneath STR 7.	E4ii.
90625-R14	• Keep clear and sort C&D waste at Shan Shek Wan.	E4ii
90625-R21	• Clear the stockpile at underneath STR 7.	E4ii
	D. Ecology	
90625-R12	• Clear C&D waste and general refuse at Stream 21, 22, 27, 30, 34 and 36-38.	F1
	E. General	
90625-G22	• Provide mitigation measures at between the outstanding construction area and paved road to at SD6-12, Stream 20 and 21, site office to prevent any mud from carrying to the public road.	B2 and C3

Ref. No.	Proposed Completion Date	Completion Date	Remarks
90618-005	25 June 2009	25 June 2009	
90618-R08			
90625-001			
90625-002			
90625-003			
90625-004			
90625-005			
90625-R06			
90625-R07			
90625-R08			
90625-R09			
90625-R10			
90625-R11			
90625-R12	02 July 2009		
90625-R13			
90625-R14			
90625-R15			
90625-R16			
90625-R17			
90625-R18			
90625-R19			
90625-R20			
90625-R21			
90625-G22			

Contract No. HY/2003/19
Improvement to Tung Chung Road Between Lung Tseng Tau and Cheung Sha

Weekly Site Inspection Record Summary

	Name	Signature	Date
Recorded by	Tony Ng		25 June 2009
Checked by	Dr. Priscilla Choy		25 June 2009

**APPENDIX J
ENVIRONMENTAL MITIGATION
IMPLEMENTATION SCHEDULE (EMIS)**

Appendix J - Summary of Environmental Mitigation Implementation Schedule

Types of Impacts	Mitigation Measures	Status
<p style="text-align: center;">Construction Dust</p>	<ul style="list-style-type: none"> • A stockpile of dusty materials should not extend beyond the pedestrian barriers, fencing or traffic cones. 	^
	<ul style="list-style-type: none"> • Vehicle washing facilities should be provided at every exit point. 	*
	<ul style="list-style-type: none"> • The area where vehicle washing takes place and the section of the road between the washing facilities and the exit point should be paved with concrete, bituminous materials or hardcores. 	*
	<ul style="list-style-type: none"> • Where a site boundary adjoins a road, street, service lane or other area accessible to the public, hoarding of not less than 2.4m high from ground level should be provided along the entire length of that portion of the site boundary except for a site entrance or exit. 	N/A
	<ul style="list-style-type: none"> • Every main haul road should be sprayed with water or a dust suppression chemical so as to maintain the entire road surface wet. 	^
	<ul style="list-style-type: none"> • The portion of any road leading only to a construction site that is within 30m of a discernible or designated vehicle entrance or exit should be kept clear of dusty materials. 	*
	<ul style="list-style-type: none"> • Any stockpile of dusty materials should be either covered entirely by impervious sheeting, placed in an area sheltered on the top and the 3 sides or sprayed with water or a dust suppression chemical so as to maintain the entire surface wet. 	^
	<ul style="list-style-type: none"> • During cement debagging or concrete batching operation in an area sheltered on top and 3 sides. 	*
	<ul style="list-style-type: none"> • All dusty materials should be sprayed with water or a dust suppression chemical immediately prior to any loading, unloading or transfer operation so as to maintain the dusty materials wet. 	*
	<ul style="list-style-type: none"> • Every vehicle should be washed to remove any dusty materials from its body and wheels immediately before leaving a construction site. 	*
	<ul style="list-style-type: none"> • The working area of any excavation should be sprayed with water or a dust suppression chemical immediately before, during and immediately after the operation so as to maintain the entire surface wet. 	*
	<ul style="list-style-type: none"> • Proper enclosures and water spraying should be implemented for the main dust-generating activities, such as soil nailing or piling works. 	*
	<ul style="list-style-type: none"> • Proper plant maintenance should be provided to avoid black smoke emission from plants/equipment. 	^

Types of Impacts	Mitigation Measures	Status	
<p align="center">Construction Noise</p>	<ul style="list-style-type: none"> • Only well-maintained plant should be operated on –site and plant should be serviced regularly during the construction works. • Machines and plant that may be in intermittent use should be shut down between work periods or should be throttled down to a minimum. • Plant know to emit noise strongly in one direction, should where possible, be orientated to direct noise away from the NSRS. • Mobile plant should be sited as far away from NSRs as possible. • Material stockpiles and other structures should be effectively utilised, where practicable, to screen noise from on-site construction activities. • Use quite plant and Working Method • Reduce the number of plant operating in critical areas close NSRs. • Construct temporary and movable noise barriers 	<p align="center">^ ^ ^ ^ ^ ^ ^ N/A</p>	
	<i>Construction Runoff and Drainage</i>		
	<p align="center">Water Quality</p>	<ul style="list-style-type: none"> • Discharges to natural water courses shall only take place when the effluent can be shown to comply with the standards specified in the Technical Memorandum, Standards for Effluents Discharged in to Drainage and Sewerage Systems, Inland and Coastal Waters. Discharges in the water gathering grounds should meet Group A standard for inland waters. 	<p align="center">*</p>
		<ul style="list-style-type: none"> • Use of sediment traps and the adequate maintenance of drainage systems to prevent flooding and overflow. • Boundaries of critical areas of earthworks should be marked and surrounded by dykes or embankments for flood protection. Temporary ditches should be provided to facilities runoff discharge into the appropriate watercourses, via a silt retention pond. Permanent drainage channels should incorporate sediment basins or traps and baffles to enhance deposition rates. 	<p align="center">* ^</p>
		<ul style="list-style-type: none"> • All temporary and permanent drainage pipes and culverts provided to facilitate runoff discharge should be adequately designed for the controlled release of storm flows. All sediment traps should be regularly cleaned and maintained. The temporarily diverted drainage should be reinstated to its original condition when the construction works has finished or the temporary diversion is no longer required 	<p align="center">*</p>
		<ul style="list-style-type: none"> • Sand silt in the wash water from the wheel washing facilities, which ensure no earth, mud and debris is deposited on roads, should be settled out the removed before discharging into storm drains. A section of the road between the wheel washing bay and the public road should be paved with backfill to prevent wash water or other site runoff form entering public road drains. 	<p align="center">^</p>
		<ul style="list-style-type: none"> • Oil interceptors should be provided in the drainage system and regularly emptied to prevent the release of oils and grease into the storm water drainage system after accidental spillage. The interceptor should have a bypass to prevent flushing during periods of heavy rain. 	<p align="center">N/A</p>
		<ul style="list-style-type: none"> • Catchpits and perimeter channels shall be constructed in advance of site formation works and earthworks. • Silt removal facilities, channels and manholes shall be suitably maintained with the deposited silt and grit being removed at least once a week, and at the onset of and after each rainstorm to ensure that these facilities are functioning properly at all times. 	<p align="center">^ *</p>

Types of Impacts	Mitigation Measures	Status
Waste / Chemical	<i>General</i>	
	<ul style="list-style-type: none"> Training and instruction shall be given at a site to construction staff to increase awareness and draw attention to waste management issues and the need to minimise waste generation. The training requirement shall be included in the site waste management plan. 	^
	<i>Storage, Collection and Transportation of Waste</i>	
	<ul style="list-style-type: none"> Wastes shall be handled and stored in a manner to ensure that they are held securely without loss or leakage. Authorised or licensed waste hauliers shall be used and they shall only collect wastes prescribed by their permits. Waste shall be removed on a daily basis. Waste storage area shall be maintained and cleaned on a daily basis. Windblown litter and dust during transportation shall be minimised by either covering trucks or transporting wastes in enclosed containers. Obtain necessary waste disposal permits from the appropriate authorities if they are required. Wastes shall be disposed of at licensed waste disposal facilities. Develop procedure such as ticketing system to facilitate tracking of loads, particularly for chemical waste, and to ensure that illegal disposal of wastes does not occur. Maintain records of the quantities of wastes generated, recycled and disposed. 	* ^ * * ^ ^ ^ ^
	<i>Surplus Excavated Materials</i>	
	<ul style="list-style-type: none"> Due to the high risk of loose material being washed into the existing nullah, stockpile materials should be properly compacted and covered from water erosion and located at least 10m away from the nullah wall. 	^
	<i>Construction and Demolition (C&D) Waste</i>	
	<ul style="list-style-type: none"> Careful design, planning and good site management shall be adopted to minimise over-ordering and generation of waste materials such as concrete grouts. The handling and disposal of bentonite slurries shall be undertaken in accordance with Practice Note for Professional Persons – Construction Site Drainage (ProPECC PN 1/94) on construction site drainage. Construction and demolition (C&D) material shall be segregated to inert and non-inert parts. The inert portion shall re-used at areas of reclamation or land formation, or to public filling area shall such allocation is deemed necessary. The non-inert portion shall be disposed of to landfill. 	* N/A *
	<i>Chemical Waste</i>	
	<ul style="list-style-type: none"> Chemical waste that is produce during construction shall be handled in accordance with the Code of Practice on the Packaging, Handling and Storage of Chemical Wastes. 	^

Types of Impacts	Mitigation Measures	Status
	<ul style="list-style-type: none"> • Containers used for the storage of chemical wastes should: <ol style="list-style-type: none"> a. Be suitable for the substance they are holding, resistant to corrosion, maintained in a good condition, and securely closed; b. Have a capacity of less than 450 litres unless the specifications have been approved by the EPD; c. Display a label in English and Chinese in accordance with instructions prescribed in Schedule 2 of the Chemical Waste Regulations. • The storage area for chemical wastes should: <ol style="list-style-type: none"> a. Be clearly labelled and used solely for the storage of chemical waste; b. Be enclosed on at least 3 sides; c. Have an impermeable floor and bunding of capacity to accommodate 110% of the volume of the largest container or 20% by volume of the chemical waste stored in the area, whichever is largest; d. Have adequate ventilation; e. Be covered to prevent rainfall entering (water collected within the bund must be tested and disposed as chemical waste if necessary); f. Be arranged so that incompatible materials are adequately separated. • Disposal of chemical waste shall be via a licensed waste collector; and to a facility licensed to receive chemical waste; or a re-user of the waste (under approval from EPD). 	<p style="text-align: center;">^</p> <p style="text-align: center;">^</p> <p style="text-align: center;">^</p>
	<i>General Refuse</i>	
	<ul style="list-style-type: none"> • General refuse generated on-site shall be stored in enclosed bins or compaction unit separate from C&D and chemical wastes. A reputable waste collector shall be employed by the contractor to remove general refuse from the site, separately from C&D and chemical wastes, on a daily for every second day basis to minimise odour, pest and litter impacts. The burning of refuse on construction sites is prohibited by law. • Reusable rather than disposable dishware shall be used if feasible. 	<p style="text-align: center;">*</p> <p style="text-align: center;">^</p>
	<i>Oil and Fuel</i>	
	<ul style="list-style-type: none"> • The storage area for chemical wastes should have an impermeable floor and bunding of capacity to accommodate 110% of the volume of the largest container; • No storage of oil or fuel should be stored within the Country Park or the water gathering ground. 	<p style="text-align: center;">^</p> <p style="text-align: center;">^</p>
Landscape and Visual Impact	<ul style="list-style-type: none"> • Refinement of the route alignment and design of associated structures to minimise loss of woodland and other landscape resources; • Minimising working areas as far as possible; • Protection and retention of existing vegetation where possible; • Transplanting of trees where appropriate • Protection and retention of existing natural rocky outcrops, slope profiles, vegetation, landscape features; • Advance planting and visual screening, where possible; 	<p style="text-align: center;">^</p> <p style="text-align: center;">^</p> <p style="text-align: center;">^</p> <p style="text-align: center;">^</p> <p style="text-align: center;">^</p> <p style="text-align: center;">^</p>

Types of Impacts	Mitigation Measures	Status
	<ul style="list-style-type: none"> • Compensatory planting; • Sensitively designed site hoarding, where possible (ie the sensitive design of site hoarding will be disrupted by hoarding panels showing the Highways Department logo, at regular intervals as per the approved engineering design);and • Grassing and woodland planting of soil slopes and disturbed areas 	<p style="text-align: center;">^</p> <p style="text-align: center;">^</p> <p style="text-align: center;">^</p>
Ecology	<ul style="list-style-type: none"> • Construction activities in the stream and other disturbances to it should be avoided. 	<p style="text-align: center;">*</p>

Remarks:

- | | |
|---|---|
| <ul style="list-style-type: none"> ^ Compliance of mitigation measure; N/A Not Applicable; * Recommendation was made during site audit but improved/rectified by the contractor. | <ul style="list-style-type: none"> X Non-compliance of mitigation measure; • Non-compliance but rectified by the contractor; # Non-compliance but rectified/improved by the contractor and awaiting IEC's further comment; |
|---|---|
-

**APPENDIX K
EVENT ACTION PLANS**

Appendix K – Event Action Plans

Event /Action Plan for Air Quality

EVENT	ACTION			
	ET	IEC	ER	Contractor
<i>Action Level</i>				
1. Exceedance for one sample	<ol style="list-style-type: none"> 1. Inform the IEC and the Contractor about the exceedance within 24 hours of identification of exceedance; 2. Identify the source, investigate the causes of exceedance and propose remedial measures; 3. Report the results of the investigation to the Contractor; 4. Prepare Notification of Exceedance (NOE) to inform the Contractor, the IEC, the ER and the EPD within 24 hours of identification of exceedance. 5. Repeat measurement to confirm finding. 6. If exceedance is indicated due to the Project construction works, increase 24-hour TSP monitoring frequency to 1-hour monitoring with 3 times every six days until no exceedance is recorded. 	<ol style="list-style-type: none"> 1. Check monitoring data submitted by the ET. 2. Confirm the ET assessment regarding the action and/or limit level exceedance during the impact monitoring; 3. Check Contractor's working method. 	<ol style="list-style-type: none"> 1. Confirm receipt of NOE in writing. 2. Notify EPD and other relevant Government departments within 24 hours of identification of exceedance. 	<ol style="list-style-type: none"> 1. Inform IEC and ER within 24 hours of identification of exceedance; 2. Submit proposals for remedial to ER within 3 working days of notification ET if exceedance is due to the Project construction works; 3. Rectify any unacceptable practice; 4. Amend working methods if appropriate and within reasonable time scale if exceedance is due to the Project construction works.

EVENT	ACTION			
	ET	IEC	ER	Contractor
<i>Action Level</i>				
2. Exceedance for two or more consecutive samples	<ol style="list-style-type: none"> 1. Inform the IEC and the Contractor about the exceedance within 24 hours of identification of exceedance; 2. Identify the source. 3. Supervise implementation of remedial measures; 4. Report the results of the investigation to the Contractor; 5. Advise the ER on the effectiveness of the proposed remedial measures; 6. Repeat measurements to confirm findings; 7. Increase monitoring frequency to daily; 8. Discuss with the IEC and the Contractor on remedial actions required; 9. If exceedance continues, arrange meeting with the IEC and the ER. 10. If exceedance stops, cease additional monitoring. 	<ol style="list-style-type: none"> 1. Check monitoring data submitted by the ET; 2. Check the Contractor's working method; 3. Discuss with the ET and the Contractor on possible remedial measures; 4. Advise the ER on the effectiveness of the proposed remedial measures; 5. Supervise implementation of remedial measures. 	<ol style="list-style-type: none"> 1. Confirm receipt of NOE in writing. 2. Notify the EPD and other relevant Government departments within 24 hours of identification of exceedance; 3. Ensure remedial measures properly implemented. 	<ol style="list-style-type: none"> 1. Inform IEC and ER within 24 hours of identification of exceedance; 2. Submit proposals for remedial actions to IEC within 3 working days of notification; 3. Implement the agreed proposals; 4. Amend proposal if appropriate.

EVENT	ACTION			
	ET	IEC	ER	Contractor
<i>Limit Level</i>				
1. Exceedance for one sample	<ol style="list-style-type: none"> 1. Notify the IEC and the Contractor within 24 hours of identification of exceedance; 2. Identify the source, investigate the causes of exceedance and propose remedial measures; 3. Prepare Notification of Exceedance (NOE) to inform the Contractor, the IEC, the ER and the EPD within 24 hours of identification of exceedance. 4. Repeat measurement to confirm finding. 5. If exceedance is indicated due to the Project construction works, increase 24-hour TSP monitoring frequency to 1-hour monitoring with 3 times every six days until no exceedance is recorded; 6. Assess effectiveness of Contractor's remedial actions and keep the IEC, the DEP and the ER informed of the results. 	<ol style="list-style-type: none"> 1. Check monitoring data submitted by the ET. 2. Check Contractor's working method. 3. Discuss with the ET, the Contractor and the ER on possible remedial measures. 4. Advise the ER on the effectiveness of the proposed remedial measures. 5. Supervise implementation of remedial measures. 	<ol style="list-style-type: none"> 1. Confirm receipt of notification of exceedance in writing; 2. Notify EPD and other relevant Government departments within 24 hours of identification of exceedance; 3. Ensure remedial measures are properly implemented. 	<ol style="list-style-type: none"> 1. Inform ER and IEC within 24 hours of identification of exceedance; 2. Take immediate action to avoid further exceedance; 3. Submit proposals for remedial actions to ER and IEC within 3 working days of notification by ET; 4. Implement the agreed proposals; 5. Report effectiveness of remedial actions to IEC and ER; 6. Amend proposal if appropriate.

EVENT	ACTION			
	ET	IEC	ER	Contractor
2. Exceedance for two or more consecutive samples	<ol style="list-style-type: none"> 1. Notify the IEC and the Contractor within 24 hours of identification of exceedance; 2. Identify the source; 3. Repeat measurements to confirm findings if the exceedance is due to the Project construction works; 4. Increase monitoring frequency to daily; 5. Carry out analysis of the Contractor's working procedures to determine possible mitigation to be implemented; 6. Arrange meeting with the IEC and the ER to discuss the remedial actions to be taken; 7. Assess effectiveness of the Contractor's remedial actions and keep the IEC, the DEP and the ER informed of the results; 8. If exceedance stops, cease additional monitoring. 	<ol style="list-style-type: none"> 1. Discuss amongst the ER, ET and the Contractor on the potential remedial actions; 2. Review the Contractor's remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly; 3. Supervise the implementation of remedial measures. 	<ol style="list-style-type: none"> 1. Confirm receipt of notification of failure in writing; 2. Notify the EPD and other relevant Government departments within 24 hours of identification of exceedance; 3. In consultation with the IEC, agree with the Contractor on the remedial measures to be implemented; 4. Ensure remedial measures are properly implemented; 5. If exceedance continues, consider what activity of the work is responsible and instruct the Contractor to stop that activity of work until the exceedance is abated. 	<ol style="list-style-type: none"> 1. Inform ER and IEC within 24 hours of identification of exceedance; 2. Take immediate action to avoid further exceedance; 3. Submit proposals for remedial actions to IEC within 3 working days of notification by ET; 4. Arrange meeting with IEC and ER to discuss the remedial actions to be taken; 5. Implement the agreed proposals; 6. Resubmit proposals if problem still not under control; 7. Report effectiveness of remedial actions to IEC and ER; 8. Stop the relevant activity of works as determined by the ER until the exceedance is abated.

Note: ET – Environmental Team, IEC – Independent Environmental Checker, ER – Engineer's Representative

Event Action Plan for Construction Noise

EVENT	ACTION			
	ET	IEC	ER	Contractor
Action Level	<ol style="list-style-type: none"> 1. Notify the IEC and the Contractor within 24 hours of identification of exceedance. 2. Carry out investigation. 3. Report the results of investigation to the IEC and the Contractor. 4. Prepare Notification of Exceedance (NOE) to inform the Contractor, the IEC, the ER and the EPD within 24 hours of identification of exceedance. 5. Discuss with the Contractor and formulate remedial measures. 6. Increase monitoring frequency to check mitigation effectiveness. 	<ol style="list-style-type: none"> 1. Review the analysed results submitted by the ET. 2. Review the proposed remedial measures by the Contractor and advise the ER accordingly. 3. Supervise the implementation of remedial measures. 	<ol style="list-style-type: none"> 1. Confirm receipt of NOE in writing. 2. Notify the EPD and other relevant Government departments within 24 hours of identification of exceedance. 3. Require the Contractor to propose remedial measures for the analysed noise problem. 4. Ensure remedial measures are properly implemented. 	<ol style="list-style-type: none"> 1. Submit noise mitigation proposals to IEC 2. Implement noise mitigation proposals

EVENT	ACTION			
	ET	IEC	ER	Contractor
Limit Level	<ol style="list-style-type: none"> 1. Notify the IEC and the Contractor within 24 hours of identification of exceedance. 2. Identify the source. 3. Repeat measurement to confirm findings. 4. Increase monitoring frequency. 5. Prepare Notification of Exceedance (NOE) to inform the Contractor, the IEC, the ER and the EPD within 24 hours of identification of exceedance. 6. Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented. 7. Inform the IEC, the ER and the DEP the causes & actions taken for the exceedances. 8. Assess effectiveness of the Contractor's remedial actions and keep the IEC, the DEP and the ER informed of the results. 9. If exceedance stops, cease additional monitoring. 	<ol style="list-style-type: none"> 1. Discuss amongst the ER, the ET and the Contractor on the potential remedial actions. 2. Review the Contractor's remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly. 3. Supervise the implementation of remedial measures. 	<ol style="list-style-type: none"> 1. Confirm receipt of NOE in writing. 2. Notify the EPD and other relevant Government departments within 24 hours of identification of exceedance. 3. Require the Contractor to propose remedial measures for the analysed noise problem. 4. Ensure remedial measures are properly implemented. 5. If exceedance continues, consider what activity of the work is responsible and instruct the Contractor to stop that activity of work until the exceedance is abated. 	<ol style="list-style-type: none"> 1. Take immediate action to avoid further exceedance 2. Submit proposals for remedial actions to IEC within 3 working days of notification 3. Implement the agreed proposals 4. Resubmit proposals if problem still not under control 5. Stop the relevant activity of works as determined by the ER until the exceedance is abated.

Note: ET – Environmental Team, IEC – Independent Environmental Checker, ER – Engineer's Representative

Event / Action Plan for Water Quality

EVENT	ACTION			
	ET	IEC	ER	Contractor
Action Level being exceeded by one sampling day	<ol style="list-style-type: none"> 1. Repeat in-situ measurement to confirm findings; 2. Identify source(s) of impact; 3. Inform the IEC and the Contractor; 4. Prepare Notification of Exceedance (NOE) to inform the Contractor, the IEC, the ER and the EPD with 24 hours of identification of exceedance. 5. Check monitoring data, all plant, equipment and the Contractor's working methods; 6. Discuss mitigation measures with the IEC and the Contractor; 7. Repeat measurement on next day of exceedance. 	<ol style="list-style-type: none"> 1. Discuss with the ET and the Contractor on the mitigation measures; 2. Review proposals on mitigation measures submitted by the Contractor and advise the ER accordingly; 3. Assess the effectiveness of the implemented mitigation measures. 	<ol style="list-style-type: none"> 1. Discuss with the IEC on the proposed mitigation measures; 2. Make agreement on the mitigation measures to be implemented. 	<ol style="list-style-type: none"> 1. Inform the ER and confirm notification of the non-compliance in writing; 2. Rectify unacceptable practice; 3. Check all plant and equipment; 4. Consider changes of working methods; 5. Discuss with the ET and the IEC and propose mitigation measures to the IEC and the ER; 6. Implement the agreed mitigation measures.
Action Level being exceeded by more than one consecutive sampling days	<ol style="list-style-type: none"> 1. Repeat in-situ measurement to confirm findings; 2. Identify source(s) of impact; 3. Inform the IEC and the Contractor; 4. Check monitoring data, all plant, equipment and Contractor's working methods; 5. Discuss mitigation measures with the IEC and the Contractor; 6. Ensure mitigation measures are implemented; 7. Prepare to increase the monitoring frequency to daily; 	<ol style="list-style-type: none"> 1. Discuss with the ET and the Contractor on the mitigation measures; 2. Review proposals on mitigation measures submitted by the Contractor and advise the ER accordingly; 3. Assess the 	<p>Discuss with IEC on the proposed mitigation measures;</p> <p>Make agreement on the mitigation measures to be implemented;</p> <p>Access the effectiveness of the implemented mitigation measures.</p>	<ol style="list-style-type: none"> 1. Inform the ER and confirm notification of the non-compliance in writing; 2. Rectify unacceptable practice; 3. Check all plant and equipment; 4. Consider changes of working methods; 5. Discuss with the ET and the IEC and propose mitigation measures to the IEC and ER within 3 working days; 6. Implement the agreed mitigation measures.

EVENT	ACTION			
	ET	IEC	ER	Contractor
	8. Repeat measurement on next day of exceedance.	effectiveness of the implemented mitigation measures.		
Limit Level being exceeded by one consecutive sampling day	<ol style="list-style-type: none"> 1. Repeat in-situ measurement to confirm findings; 2. Identify source(s) of impact; 3. Inform the IEC and the Contractor; 4. Prepare Notification of Exceedance (NOE) to inform the Contractor, the IEC, the ER and the EPD with 24 hours of identification of exceedance. 5. Check monitoring data, all plant, equipment and the Contractor's working methods; 6. Discuss mitigation measures with the IEC, the ER and the Contractor; 7. Ensure mitigation measures are implemented; 8. Increase the monitoring frequency to daily until no exceedance of Limit Level. 	<ol style="list-style-type: none"> 1. Discuss with the ET and the Contractor on the mitigation measures; 2. Review proposals on mitigation measures submitted by the Contractor and advise the ER accordingly; 3. Assess the effectiveness of the implemented mitigation measures. 	<ol style="list-style-type: none"> 1. Discuss with the IEC, the ET and the Contractor on the proposed mitigation measures; 2. Request the Contractor to critically review the working methods; 3. Make agreement on the mitigation measures to be implemented; 4. Assess the effectiveness of the implemented mitigation measures. 	<ol style="list-style-type: none"> 1. Inform the Engineer and confirm notification of the non-compliance in writing; 2. Rectify unacceptable practice; 3. Check all plant and equipment; 4. Consider changes of working methods; 5. Discuss with the ET, the IEC and the ER and propose mitigation measures to the IEC and the ER within 3 working days; 6. Implement the agreed mitigation measures.

EVENT	ACTION			
	ET	IEC	ER	Contractor
Limit Level being exceeded by more than one consecutive sampling days	<ol style="list-style-type: none"> 1. Repeat in-situ measurement to confirm findings; 2. Identify source(s) of impact; 3. Inform the IEC, the Contractor and DEP; 4. Check monitoring data, all plant, equipment and Contractor's working methods; 5. Discuss mitigation measures with the IEC, the ER and the Contractor; 6. Ensure mitigation measures are implemented; 7. Increase the monitoring frequency to daily until no exceedance of Limit Level for two consecutive days. 	<ol style="list-style-type: none"> 1. Discuss with ET and Contractor on the mitigation measures; 2. Review proposals on mitigation measures submitted by the Contractor and advise the ER accordingly; 3. Assess the effectiveness of the implemented mitigation measures. 	<ol style="list-style-type: none"> 1. Discuss with the IEC, the ET and the Contractor on the proposed mitigation measures; 2. Request Contractor to critically review the working methods; 3. Make agreement on the mitigation measures to be implemented; 4. Assess the effectiveness of the implemented mitigation measures; 5. Consider and instruct, if necessary, the Contractor to slow down or to stop all or part of the works until no exceedance of Limit Level. 	<ol style="list-style-type: none"> 1. Inform the ER and confirm notification of the non-compliance in writing; 2. Rectify unacceptable practice; 3. Check all plant and equipment; 4. Consider changes of working methods; 5. Discuss with the ET, the IEC and the ER and propose mitigation measures to the IEC and the ER within 3 working days; 6. Implement the agreed mitigation measures; 7. As directed by the ER, slow down or stop all or part of the construction activities.

**APPENDIX L
COMPLAINT LOGS**

Appendix L - Complaint Log

Log Ref.	Location	Received Date	Details of Complaint	Investigation/Mitigation Action	Status
S63	Tung Chung Road and Cheung Sha Stream	14 Sep 06	The complaint, which was lodged by Green Lantau Association on 13th September 2006, accused the failure of the site drainage system to check the discharge of silt-laden surface water from the site on that day.	ETL is of the view that the complaint is justifiable but the accusation is not substantiated by scientific data in that the rainstorm event was 1 in 25 years. It is therefore beyond the Contractor's terms of contract to design, operate and maintain the carrier pipe and the sedimentation tank to cater for this rainstorm. The Contractor has a defensible case under this increment weather condition.	Closed
S65-S69	Tung Chung Road Southern Section; Cheung Sha Stream;	19 Sep 06	Five complaints, which were lodged by Green Lantau Association on 15th September 2006, accused the failure of the drainage system for the Project on 13th September 2006. The subject of complaints are listed as below: (i) Failed Filtration System (ii) Contaminated Stream (iii) Polluted Cheung Sha Stream (iv) Polluted Cheung Sha Stream (v) Site Debris on Road	ETL is of the view that the complaints are justifiable but the accusation is not substantiated by scientific data in that the rainstorm event was 1 in 25 years. It is therefore beyond the Contractor's terms of contract to design, operate and maintain the carrier pipe and the sedimentation tank to cater for this rainstorm. The Contractor has a defensible case under this increment weather condition.	Closed

Log Ref.	Location	Received Date	Details of Complaint	Investigation/Mitigation Action	Status
S71	Northern Section, Tung Chung Road	3 Nov 06	<p>The complaint, which was referred by Resident Site Staff (RSS) to ET on 3rd November 2006, was raised by a resident living Lantau Island on 17th October 2006 concerning the Tung Chung Road condition on 16th October 2006.</p>	<p>Based on the meteorological data extracted from HKO, the total rainfall between 0:45 and 6:45 hours in Lantau was 196 mm with an average intensity of 32.67 mm/hr on 16th October.</p> <p>Based on the results derived from Table 2 “the Intensity-Duration-Frequency (IDF) for various return periods” and Table 4 “Depth-Duration-Frequency (DDF) for durations of than 4 hours” of the “Stormwater Drainage Manual”, the return period should be less than 1 in 10 years.</p> <p>Therefore, the complaint was considered justifiable since the EIA report has recommended the provision of site drainage system shall be 1 in 10 years. The Contractor has implemented remedial measures and preventive measures.</p>	Closed
S72	Lung Tseng Tau Village, Tung Chung	3 Nov 06	<p>The public complaint, which was referred by RSS to ET on 3rd November 2006, was received by the Integrated Complaint Centre (ICC) on 26th October 2006 regarding dust nuisance generated from the Project.</p>	<p>Based on the information collected and the monitoring results, the complaint was considered not justifiable due to the following since no exceedance of the air quality monitoring results was recorded in October 2006.</p> <p>During site inspections in the month, dust mitigation measures have been implemented by the Contractor; and no observation was recorded during the site inspections.</p> <p>According to the information provided by the Contractor and the RSS, the Contractor has implemented additional mitigation measures, including increased water spraying on the public road to more than once a day and covered the stockpiling materials.</p>	Closed

Log Ref.	Location	Received Date	Details of Complaint	Investigation/Mitigation Action	Status
S73	Southern Section of the Project	3 Nov 06	The complaint, which was referred by RSS to ET on 3 rd November 2006, was raised by a resident living at Cheung Sha on 24 th October 2006 concerning noise generated from rock breaking in Southern Section of the Project.	<p>According to the EM&A records, no exceedance of noise level and no non-compliance were recorded in the month.</p> <p>As advised by the Contractor and RSS, silent rock breaking equipment has been used and noise insulation materials have been used to minimize the noise impact generated from the rock breaking activity.</p> <p>Based on the provided information and the monitoring results, the complaints are considered not justifiable. The Contractor has implemented the mitigation measures to minimize the noise generation from construction activities and was still reminded to continuously implement their practice to prevent noise nuisance generation from the construction works.</p>	Closed
S74	Tung Chung Stream	24 Nov 06	Highways Department (HyD) of HKSAR received a complaint for Agriculture, Fisheries and Conservation (AFCD) regarding untreated site runoff discharged to Tung Chung Stream during the site visit on 21 st November 2006. The Resident Site Staff (RSS) subsequently referred the complaint to the Environmental Team (ET) Leader of the Project on 24 th November 2006.	The investigation revealed that, based on the meteorological data extracted from HKO, the highest rainfall recorded was between 13:45 and 15:45, with a total of 93mm in two hours. With the above rainfall intensities extracted from HKO, together with the Intensity-Duration-Frequency (IDF) for various return periods derived from Table 2 of the "Stormwater Drainage Manual", the return period should be less than 10 years. Therefore, the complaint was considered justifiable and the Contractor has implemented remedial measures and preventive measures.	Closed

Log Ref.	Location	Received Date	Details of Complaint	Investigation/Mitigation Action	Status
S75	West of the new Tung Chung Road Southern Section Discharge Point	21 Nov 06	Both Environmental Protection Department (EPD) and China Civil Engineering Construction Corporation and China Railway Wujia Joint Venture (the Contractor) received the same public complaint, regarding muddy water discharged to Chueng Sha on 21 st November 2006. The Contractor subsequently referred the complaint to the Environmental Team (ET) Leader of the Project on the same day.	The complainant considered that this stream was muddy and discharging muddy water into the sea. As stated in the above paragraph, the investigation revealed that the return period for the rainfall between 13:45 and 15:45 was 41 years. As the complaint was lodged at 14:58 on 21 st November 2006, it is reasonable to consider the rainfall recorded in the hour between 13:45 to 14:45 which was 57mm. According to "Stormwater Drainage Manual", the return period should be less than 10 years. Therefore, the complaint was considered justifiable and the Contractor has implemented remedial measures and preventive measures.	Closed
S76	Pui O Wan	27 Nov 06	China Civil Engineering Construction Corporation and China Railway Wujia Joint Venture (the Contractor) received the same public complaint, regarding muddy water discharged into Pui O Wan on 23 rd November 2006. According to the complainant, muddy water was discharged into Pui O Wan from the new Tung Chung Road Southern Section Discharge Point (near proposed round about on South Lantau Road) in the morning of 23 rd November 2006. The complainant suspected that the muddy water was being pumped off site through failed filtration systems into the sea as there had been no recent rainfall on that day.	The investigation revealed that the complaint was considered not justifiable since (1) no muddy water was generated due to the construction activities in the vicinity of the discharged point; and (2) no surface runoff as no rainfall was recorded on 23 rd November 2006.	Closed

Log Ref.	Location	Received Date	Details of Complaint	Investigation/Mitigation Action	Status
S77	Sheung Ling Pei, Ha Ling Pei, Wong Ka Wai & Lung Tseng Tau Villages	18 Dec 06	<p>Highways Department (HyD) and the Resident Engineer received a complaint against Water Quality Supply (Muddy Water) at Sheung Ling Pei, Ha Ling Pei, Wong Ka Wai & Lung Tseng Tau Villages via District Office (Islands) on 29th November 2006.</p> <p>The complainants claimed that subject villages were suffering from muddy water supplied from the water main on the past few days before 29th November 2006.</p>	<p>Upon receipt of the complaint, the Contractor inspected all streams (above AFCD entrance) in the Northern Section. Muddy water was observed at Stream 13 which was believed the source of muddy water. However, no water flow was found at the stream. The muddy water was considered probably due to the seepage of underground water mixed with excavated soil to Stream 13. Furthermore, an ad-hoc meeting between DO/WSD/AFCD/MOTT/CCJV/IEC/ET was held on 14 December 2006 to discuss this issue.</p> <p>The complaint was considered due to the construction activities of the Project. Emergency remedial works had been taken by the Contractor to rectify the situation and preventive measures had also been implemented.</p>	Closed
S80	Tung Chung Road near Lung Tseng Tau Village	3 Jan 07	<p>The complaint was lodged by a resident at Lung Tseng Tau Village regarding dust nuisance at Tung Chung Road near Lung Tseng Tau Village. According to the complainant, the dust was generated by vehicle movements (about 5 to 7 per day). The complainant noticed that there was only once per day for water spraying on the road. She suggested that the frequency of water spraying should be increased to 1 to 2 per hour. In addition, she requested to provide more water-spraying practice for the concerned area.</p>	<p>According to the Contractor and the RSS, the main dust emission in the vicinity of Lung Tseng Tau Village was due to the vehicle movements on Tung Chung Road.</p> <p>Base on the information collected and the monitoring results, the complaint was considered not justifiable since (1) no exceedance of the air quality monitoring results was recorded in December 2006; (2) dust mitigation measures have been implemented by the Contractor; and (3) no observation was recorded during the site inspections.</p> <p>In response to the complaint, the Contractor had stepped up the dust suppression control immediately. A water truck was mobilized to spray water at Tung Chung Road within particular in the vicinity of the complainant's house from once per day to at least 3 times per day.</p>	Closed

Log Ref.	Location	Received Date	Details of Complaint	Investigation/Mitigation Action	Status
S81	Lung Tseng Tau	20 Dec 06	<p>The Contractor, CCECC and CRWJ Joint Venture (CCJV) and Highways Department (HyD) of HKSAR received a complaint regarding dust control at Lung Tseng Tau from the Office of Islands District Councilor, Wong Fuk-kan on 6th December 2006.</p> <p>According to the complainant, he had received a number of complaints from residents in South Lantau regarding the dust nuisance when their vehicles passing through Tung Chung Road near Lung Tseng Tau. The residents said their vehicles were full of dust whenever they had passed through Tung Chung Road.</p>	<p>Base on the site inspection records and information collected from the RSS and the Contractor, the complaint was considered due to due to the vehicle movements on Tung Chung Road. In response to the complaint, the RSS has conducted site inspection in the afternoon on 18th December 2006. The Contractor had immediately mobilized labors to clear the mud trail on Tung Chung Road between ch.3700-4000 using sweepers. In order to maintain the condition of Tung Chung Road, the Contractor has mobilized more staff to clear the mud deposits on the whole Northern Section of Tung Chung Road on 23rd December 2006.</p> <p>The Contractor has provision wheel washing facilities at each site exit/entrance. In order to maintain Tung Chung Road condition, the Contractor has mobilized a water truck solely for wheel washing purpose at the site entrance near RW37 between ch.3700-4000 since 23rd December 2006. The location is the most busy site exit/entrance for soil removal as wheel washing facilities. Wheels of each vehicle shall be washed before leaving the site. The wastewater after wheel washing at each site exit/entrance shall be collected and treated before discharge at designated location. also mobilized water trucks</p>	Closed

Log Ref.	Location	Received Date	Details of Complaint	Investigation/Mitigation Action	Status
S82	The nullah near the Yat Tung Estate	15 Jan 07	<p>The complaint was lodged by the Legislative Councillor Hon. Albert W.Y. Chan regarding frequent discharge of muddy water from the Tung Chung Road improvement project on 15th December 2006. According to Mr. Chan's letter, the complainant was a resident living in Tung Chung.</p> <p>The DSD letter pointed out that muddy water was being frequently discharged to the nullah near the Yat Tung Estate, and confirmed that the site of Tung Chung Road improvement project was the source of such discharge.</p>	<p>After investigation, the discharge of muddy water was largely due to the deposited silts caused by previous heavy rainstorms in November.</p> <p>The contractor has responded promptly in deploying a number of actions to remedy the matter. These include de-silting operation at Wong Lung Hang nullah on 23rd December 2006 to remove the accumulated soil and silt materials washed down by the discharges, of which photographs are provided.</p> <p>In addition, several intermediate sedimentation ponds along the temporary drainage system south of Shek Mun Kap to improve de-silting capacity have been installed, and that the site condition will be closely monitored so that advice on any practical measures in improving the quality of water discharge to Wong Lung Hang nullah can be given.</p> <p>In addition, the Contractor is also undergoing continual inspections and monitoring on the conditions of the concerned discharge of the construction site, and is in close liaison with the ET to cap exceeding levels of future discharge.</p>	Closed

Log Ref.	Location	Received Date	Details of Complaint	Investigation/Mitigation Action	Status
S86	Slope opposite to the AFCD's Office at Tung Chung Road near mileage M2.5	8 Feb 07	The complaint was lodged by a resident in Lantau Island regarding the construction noise generated from the road works at the slope opposite to the AFCD's Office at Tung Chung Road near mileage M2.5.	<p>The site of concern is most likely at the RW6 of the Project. According to the Contractor, soil nailing works was conducted at RW6 and the first stage of soil nailing works at RW6 has been completed before 8th February 2007.</p> <p>According to the noise monitoring results at monitoring station NM5, Tung Chung Au Country Parks Management Centre, which is located near the AFCD's Office, there was no exceedance recorded from 2nd January to 14th February 2007.</p> <p>As advised by the Contractor, the following mitigation measures will be implemented as far as possible to reduce the noise nuisance to the nearby residents when soil nailing works carry out in the future:</p> <ul style="list-style-type: none"> ● To cover the soil nailing works area with tarpaulin; ● To reduce the number of machines for soil nailing; ● To orientate the machines for soil nailing works so that the major noise generating part will not directly face the Noise Sensitive Receiver; and ● To scatter the plants so that the noise being generated will not be centralized in certain direction. 	Closed

Log Ref.	Location	Received Date	Details of Complaint	Investigation/Mitigation Action	Status
S90	Northern and Southern Section of Tung Chung Road	20 May 07	The complaint was lodged by the Green Lantau Association at on 20 May 2007 regarding failed drainage for the Project on that day.	<p>According to the Contractor, the main concern in the Northern Section is that a large amount of seepage from the permanent slope near the Stream 18 and Stream 21 was observed. The permanent hinterland u-channel was not able to collect most of the hinterland water which ultimately collected by the carrier pipe and increased the loading of the treatment facilities at Shek Mun Kap.</p> <p>As advised by the Contractor, the main problem in Southern Section was due to the fact that the silt is too fine to be settled within a short time, i.e. 3 minutes, as stated in the EIA Report. Due to the large catchments of the site, muddy water could not be completely settled or treated before discharged or overflowed. No bigger sedimentation tank can be constructed due to the site constraint to retain all surface water in heavy rainy days.</p> <p>The complaint was considered justifiable. However, it is beyond the Contractor's capability to completely avoid muddy water discharging or overflowing to sea due to the site conditions and constraints under increment weather conditions.</p>	The complaint investigation report was commented

Log Ref.	Location	Received Date	Details of Complaint	Investigation/Mitigation Action	Status
S91	Zone 4 (STR 14)	1 June 07	<p>The complaint was lodged by a resident in Butterfly Crest, Lantau Island regarding the construction noise generated from the Project on Sunday, which is likely to be 27th May 2007.</p>	<p>According to the Contractor, construction works were undertaken near STR 14 in the morning of 27th May 2007 and the Powered Mechanical Equipment (PME) used on that day included 2 excavators and 1 dump truck at STR 14. The concerned site was covered under the construction noise permit (CNP) no. GW-RS0281-07.</p> <p>As advised by the Contractor, the 2 excavators and 1 dump truck, which categorized separately as Group A and Group E of the abovementioned CNP, were utilized alternatively during the operation in order to comply with the conditions stipulated in the CNP.</p> <p>Base on the information collected, the complaint was considered not justifiable as the equipment used comply with the CNP conditions.</p>	Closed

Log Ref.	Location	Received Date	Details of Complaint	Investigation/Mitigation Action	Status
S93	Western Section of Pui O Bay	22 May 07	<p>The complaint was lodged by the Green Lantau Association at on 22 May 2007 regarding muddy water was observed at 50m west of the Tung Chung Road southern section around 11am on 22 May 2007.</p>	<p>As advised by the Contractor, the main problem in Southern Section was due to the fact that the silt is too fine to be settled within a short time, i.e. 3 minutes, as stated in the EIA Report. Due to the large catchments of the site, muddy water could not be completely settled or treated before discharged or overflowed. No bigger sedimentation tank can be constructed due to the site constraint to retain all surface water in heavy rainy days.</p> <p>In the site near Pui O Wan, the Contractor has exhausted their efforts including to pump the water from sedimentation tanks back to the stockpile area. Unfortunately, one of the pumps was out of order in the early days of that rainy period. However, the pump has been rectified on 22 May 2007.</p> <p>The complaint was considered justifiable. However, it is beyond the Contractor's capability to completely avoid muddy water discharging or overflowing to sea due to the site conditions and constraints under increment weather conditions.</p>	<p>The complaint investigation report was commented</p>

Log Ref.	Location	Received Date	Details of Complaint	Investigation/Mitigation Action	Status
S100	Stream water behind WSD's weir	27 July 07	<p>The complaint was lodged by a resident living at Lung Tseng Tau area during the meeting between RSS and the representatives from the villages at Lung Tseng Tau area on 17th July 2007 regarding turbid water supply from DO main to the village houses at Lung Tseng Tau area.</p>	<p>The RSS and the Contractor had a site investigation with the complainant at his household water supply, the WSD weir and a work area immediately upstream of the weir (STR02 near the Stream 12) on the same day.</p> <p>It was observed that the water directly from the household supply was found with low degree of turbidity when comparing it with portable water supply.</p> <p>According to the visual inspection of the RSS and the Contractor, the stream water behind the WSD's weir, which is the source of water supply to the villagers via a DO main, was found clear and there was no sign of contamination.</p> <p>Inspection of the work site at STR02 upstream of the weir indicated no activities affecting the upstream water quality.</p> <p>By reviewing the water quality monitoring data at Tung Chung Stream during early of July 2007, the turbidity and SS values are considered to be low and the data revealed that the Tung Chung Stream and the WSD weir were not contaminated during the above mentioned period.</p> <p>Nevertheless, In order to minimize the water quality impacts, the Contractor has implemented following mitigation measures:</p> <ul style="list-style-type: none"> ● To erect sand bag bund in the vicinity of STR02; ● To shotcrete the soil surface near Stream 12. 	Closed

Log Ref.	Location	Received Date	Details of Complaint	Investigation/Mitigation Action	Status
S104	Tung Chung Road and Tung Chung Au near AFCD's Office	6 August 07	<p>The complaint was lodged by Mr. Ho on 6th August 2007 regarding a suspected case of silty runoff and muddy water generated from construction site flowing on public road. Turbid water was observed behind the weir near the AFCD's office at Tung Chung Au.</p>	<p>No non-compliance or environmental deficiency related to or in the vicinity of the concerned area was identified during these site audits.</p> <p>According to Hong Kong Observatory, Hong Kong was under the effect of the tropical storm over the central part of the South China Sea which brought heavy showers with 100.4 millimeters of total rainfall recorded on 6 August. The amber rainstorm warning was hoisted between 15:55pm to 17:30pm.</p> <p>The Contractor has confirmed there was no construction activity in the concerned area on 6th August 2007 due to heavy rainfall. According to the Contractor, muddy water was the silty runoff from nearby work sites due to the heavy rainfall on the day.</p> <p>The Contractor has implemented following mitigation measures:</p> <ul style="list-style-type: none"> ● To desilt temporary drainage channels and sedimentation tank. ● To clear the silt and mud in the surface of haul road at RW06 ad RW07. ● To cover exposed slope with tarpaulin at RW06 and RW07. <p>According to the RSS and the Contractor, no further report of silt and muddy water runoff from concerned area was received after implementation of the aforesaid mitigation measures.</p>	Closed

Log Ref.	Location	Received Date	Details of Complaint	Investigation/Mitigation Action	Status
S113	Upper and Lower Cheung Sha Village	12 December 2007	The complaint was lodged by Mr. Liu on 12 December 2007 regarding dust nuisance at Upper and Lower Cheung Sha Village.	<p>According to the Contractor, the main dust emission in the vicinity of Cheung Sha Village was due to the road works and associated vehicle movements on Tung Chung Road.</p> <p>The Contractor has implemented following mitigation measures:</p> <ul style="list-style-type: none"> • Cleared the silts on the haul road; • Applied watering on the road by water hose at San Shek Wan; • Increased the number of water browsers; and • Covered the exposed slope and stockpiles with tarpaulin sheets. <p>By reviewing the air quality monitoring data, there was no exceedance of air quality monitoring results on 8th and 14th December 2007 and dust mitigation measures have been implemented by the Contractor.</p> <p>According to the RSS and the Contractor, no further complaint regarding dust nuisance from concerned area was received after implementation of the aforesaid mitigation measures.</p>	Closed

Log Ref.	Location	Received Date	Details of Complaint	Investigation/Mitigation Action	Status
S147	Zone 1 Tung Chung Road	14 November 2008	<p>The complaint was referred to ETL from EPD by Mr. Peter Tang on 14 November 2008, regarding a suspected case about land- filling of non-inert construction waste in early 2008 and potential further land-filling of non- inert construction waste stockpiled at Zone 1 Tung Chung Road.</p> <p style="text-align: right;">L-15</p>	<p>According to the Contractor, there are two major stockpile areas within the construction premise which are located at San Shek Wan and Tung Chung Road. The location specified in the complaint was the stockpile area at San Shek Wan. This location was used for stockpiling reusable materials.</p> <p>Base on the information collected, the complaint was considered not justifiable as San Shek Wan is one of the designated C&D materials sorting areas of the Project and no direct evidence shows there was land-filling activity by this project at the specified location.</p> <p>However, as a follow up of the complaint, the Contractor has implemented mitigation measures as follows:</p> <ul style="list-style-type: none"> • Preliminary segregation of waste was enhanced; and • Water was sprayed on the stockpiles more frequently to further suppress dust generation. <p>The Contractor was recommended to continue the following mitigation measures :</p> <ul style="list-style-type: none"> • To provide dust suppression measures to the stockpiles at San Shek Wan, especially during dry season, to minimize dust generation; • To carry out continuous segregation of materials on site; • To avoid accumulation of stockpiles; and • To dispose of non-reusable material to designated outlets as soon as possible. 	Closed

Log Ref.	Location	Received Date	Details of Complaint	Investigation/Mitigation Action	Status
S152 and S154	Zone 1 Tung Chung Road	3 rd and 8 th April 2009	EPD received a public complaint about suspected land- filling of non-inert construction waste in early 2009 at Zone 1 of Tung Chung Road for the Project and a similar verbal complaint regarding illegal land filling of construction waste on the same site (Zone 1) was received from Lands Department.	<p>Base on the information collected, the complaint was considered not justifiable as San Shek Wan is one of the designated C&D materials sorting areas of the Project and no direct evidence shows there was land-filling activity by this project at the specified location. Sorting and disposal of C&D materials were conducted in accordance with WMP.</p> <p>Nevertheless, the Contractor was recommended to continue the following mitigation measures in order to minimize the environmental impact on the nearby community and the amount of waste produced:</p> <ul style="list-style-type: none"> • Stockpiled material shall be covered by tarpaulins and/or watered as appropriate to prevent windblown dust and/or surface run-off. Storage of material on site shall be kept to a minimum to avoid nuisance to local residents; • excavated material in trucks shall be covered by tarpaulins to reduce the potential for spillage and dust generation; and • good site practice shall be implemented to avoid waste generation and promote waste minimization. 	Closed

Log Ref.	Location	Received Date	Details of Complaint	Investigation/Mitigation Action	Status
S157	New Tung Chung Road and near-by soil erosion in Cheung Sha Catchwater	1 st June 2009	The complaint was raised by the WSD on 1 st June 2009. WSD concerned about the soiled water had been collected from New Tung Chung Road and soil erosion was found at Cheung Sha Catchwater. The ETL of the Project was informed of the complaint by CCJV through the e-mail on 5 th June 2009 and initiated the complaint investigation procedures.	<p>Base on the information collected, the complaint was considered justifiable as heavy downpour of rain had caused soil erosion on exposed slopes leading to Cheung Sha Catchwater.</p> <p>The Contractor was recommended to take sufficient mitigation measures to minimize the exposed areas to rain by covering the exposed area with tarpaulin or soil erosion control mat, as well as to carry out slope reinstatement works as soon as practicable.</p> <p>The environmental conditions of the site will be continuously reviewed by the Resident Site Staff, IEC and the Environmental Team through regular and ad hoc site inspections and monitoring exercises.</p>	Closed

**APPENDIX M
SUMMARY OF WARNING / DIRECTION
ISSUED BY THE EPD AND
PROSECUTION**

Appendix M - Summary of Warnings / Direction Issued by the EPD and Prosecution

Summary of Warnings / Direction Issued by the EPD

Date of Letter	Warnings/Direction
3 February 2005	The Contractor was requested to construct catch pits and perimeter channels in advance of site formation and earth works
17 May 2005	The Contractor was requested to immediately re-provide the on-site wastewater management systems to adequately cater the rainwater runoff and to submit the detail proposal for runoff management and treatment systems.
4 October 2005	The Contractor was requested to rectify the situation in order to comply with EP Conditions 2.4 & 2.5 regarding the provision of drainage systems, EP Condition 3.16 regarding site runoff mitigation measures and EP Condition 3.6 regarding no works of the Project shall be carried out outside the “limit of works area”.
15 December 2005	The Contractor was requested to rectify the situation of Zone D where fuel oil was found spilled onto ground of the works area in contravention to Section 7.5.2.1 of the Waste Management Plan (WMP). The Section stipulates provisions against spillage of fuels to prevent contamination of the construction site.
24 March 2006	The Contractor was requested to rectify the situation in order to comply with EP Condition 3.9 regarding the stipulated span of temporary bridges used during construction to cross the stream.
13 April 2006	The Contractor was requested to rectify the situation of Zone E where fuel oil was stored within the Country Park in contravention to condition 3.14 of the EP.
29 June 2006	The Contractor was requested to rectify the situation that site runoff will not be discharged into Tung Chung Stream in order to comply with EP Condition 2.4.
26 September 2006	The Contractor was requested to rectify the situation that excessive dust emission occurred. Watering programme shall maintain to ensure that all exposed road surfaces and dust sources are wet in order to comply with EP Condition 1.7.
4 October 2006	<ul style="list-style-type: none"> -The Contractor was requested to rectify the situation that site runoff will not be discharged into Tung Chung Stream in order to comply with EP Condition 2.4. -The Contractor was requested to rectify the situation in order to comply with EP Condition 3.9 regarding the stipulated span of temporary bridges used during construction to cross the stream 28 -.The Contractor was requested to rectify the situation in order to comply with EP Condition 3.9 regarding the stipulated span of temporary bridges used during construction to cross the stream 32. - The Contractor was requested to rectify the situation in order to comply with EP Condition 3.9 regarding the stipulated span of temporary bridges used during construction to cross the stream 33.
13 February 2007	The Contractor was requested to rectify the situation that site runoff will not be discharged into Tung Chung Stream in order to comply with EP Condition 2.4.
19 February 2008	The Contractor was requested to take all necessary actions to rectify the situation that surface run-off from the construction site discharged into storm drain without treatment in order to comply with EP Condition 3.16.
14 April 2008	The Contractor was required to take all necessary actions to rectify the situation

Date of Letter	Warnings/Direction
	that a section of the site near Pak Kung Au was not provided with vehicle washing facilities including high pressure water jet at vehicular exit points so as not to contravene the statutory requirement.
8 December 2008	The Contractor was required to take all necessary actions to rectify the situation that a suspected chemical waste (mineral oil) was found improperly packed and stored at Zone 1 Tung Chung Road on 4 December 2008, so as not to contravene the statutory requirement of the Waste Disposal (Chemical Waste) (General) Regulation (Cap. 354).

Summary of Notification of Summons

Date of Summons	Details of the Summons	Status
25 January 2007	Construction works at a slope next to Stream no. 28 along Tung Chung Road, Cheung Sha, Lantau Island which contrary to EP Condition 3.9 concerning works at Stream 28 on 26 July 2006	Withdrawn by EPD
16 February 2007	Construction works near Stream no. 8 along Tung Chung Road, Cheung Sha, Lantau Island which contrary to EP Condition 2.4 by discharging runoff during construction into Tung Chung Stream on 16 August 2006	The Contractor was fined \$7500 on 4 June 2007.
17 May 2007	Construction works near Stream no. 8 along Tung Chung Road, Cheung Sha, Lantau Island which contrary to EP Condition 2.4 by discharging runoff during construction into Tung Chung Stream on 21 November 2006	The Contractor was fined \$7500 on 4 June 2007.

Summary of Notification of Successful Prosecution

Date of Successful Prosecution	Details of the Successful Prosecution	Status
4 June 2007	Construction works near Stream no. 8 along Tung Chung Road, Cheung Sha, Lantau Island which contrary to EP Condition 2.4 by discharging runoff during construction into Tung Chung Stream on 16 August 2006	The Contractor was fined \$7500 on 4 June 2007
4 June 2007	Construction works near Stream no. 8 along Tung Chung Road, Cheung Sha, Lantau Island which contrary to EP Condition 2.4 by discharging runoff during construction into Tung Chung Stream on 21 November 2006	The Contractor was fined \$7500 on 4 June 2007

APPENDIX N
CONSTRUCTION PROGRAMME

Item No.	Description	Unit	Qty	Start Date	End Date	Remarks
ZAKD0000	Commencement of Contract	0	100	28JUN04 A		
ZAKD0001	Complete Works in Section 1	0	0	30JUN09	0	S1-1030, S1-1122, S1-1530,
ZAKD0002	Complete Works in section 2	0	100	08FEB06 A		S2-1250
ZAKD0003	Complete Works in Section 1A	0	0	31AUG11	0	S1-6920
ZAKD0004	Complete Works in Section 2A	0	0	31AUG11	0	S2-8740
ZAKD0005	Complete Works in Section 3	0	0	31JUL11	0	S3-3300, S3-3330, S3-3860,
ZAKD0006	Complete Works in Section 3A	0	0	30AUG12	0	S3-3610
ZAKD0007	Complete Works in Undefined Section	0	0	30JUN09	0	S1-2420, S1-2460, S1-2580,
ZAKD0008	Complete Establish'd Works in Undefined Section	0	0	31AUG11	0	S2-8010
ZAKD0029	Extended Completion Date of Section 1	0	100	18APR07 A		
ZAKD0035	Extended Completion Date of Section 1A	0	100	15APR07 A		
ZAKD0060	Extended Completion Date of Section 2	0	100	06JAN07 A		
ZAKD0065	Extended Completion Date of Section 2A	0	100	05JAN09 A		
ZAKD0080	Extended Completion Date of Section 3	0	100	15JUL07 A		
ZAKD0100	Extended Completion Date of Section 3A	0	0	14JUL09 *	0	
D470	Waste Management Plan	2450	84	04NOV04 A	31AUG11	361d
D480	Environment Monitoring and Audit	2450	84	04NOV04 A	31AUG11	361d
S1-1500	Footpath drainage works for S&D structures	91	52	01JAN09 A	25APR09	49d
S1-1530, S1-2338, S1-2370						
S1-1545	Landscape Earth Bund/associated Rdwks ch.920-1020	50	0	02NOV09 *	31DEC09	814d
S1-2080	Recompact fill slope remedial works ch1755-1945	22	0	01APR09 *	30APR09	45d
S1-2084	Rremedial slope works @ ch.1900	13	0	16APR09 *	30APR09	49d
S1-2338	Footpath and Verge (Remedial Works)	4	0	27APR09	30APR09	49d
S1-2370	Additional street furnitures	4	0	27APR09	30APR09	49d

Complete Works in Section 1
 Complete Works in section 2
 Complete W
 Complete W
 Complete Work
 Complete Works in Undefined Section
 Complete E

Extended Completion Date of Section 2A
 Extended Completion Date of Section 3A

Waste Mana
 Environment

Footpath drainage works for S&D structures

Landscape Earth Bund/associated Rdwks ch.920-1020

Recompact fill slope remedial works ch1755-1945
 Rremedial slope works @ ch.1900

Footpath and Verge (Remedial Works)
 Additional street furnitures

date 26JUN04
 I date 30AUG12
 date 01MARD09
 Revision 18
 number 1A
 of name RV18A
 Prepared by System, Inc.

- Entry bar
- Progress bar
- Critical bar
- Summary bar
- Summary point
- Start milestone point
- Finish milestone point

Contract No. HY2003/19
 Improvement to Tung Chung Road
 Works Programme Rev. 16

Date	Revision	Checked	Approved
27MAR09	Revision 18		

Item No.	Description	Orig. Dur.	Comp.	Start	End	Est. Cost	Actual Cost	Progress	Remarks
Retaining Wall RW09									
S1-3590	Additional Toe Wall	28	0	02MAR09	31MAR09	49d		S1-3600	
S1-3600	Backfilling	9	0	01APR09	15APR09	49d	S1-3650	S1-3633, S1-3810	<input type="checkbox"/> Additional Toe Wall
S1-3810	Slope drainage	13	0	15APR09	30APR09	49d	S1-3600	ZAKD001	<input type="checkbox"/> Backfilling
Roadworks									
S1-3833	Outfencing parapet b/w RW005 and RW006	8	0	18APR09	25APR09	49d	S1-3631, S1-3600	S1-3634, S1-3635	<input type="checkbox"/> Slope drainage
S1-3634	Street furniture remedial works	4	0	27APR09	30APR09	49d	S1-3633	ZAKD001	<input type="checkbox"/> Outstanding parapet b/w RW005 and RW006
S1-3635	Footpath and Verge remedial works	4	0	27APR09	30APR09	49d	S1-3633	ZAKD001	<input type="checkbox"/> Street furniture remedial works
Zone D (CH. 2725 - 3100)									
Retaining Wall RW07									
S1-4241	Additional Drainage Works	28	0	02MAR09	31MAR09	49d		S1-4260	<input type="checkbox"/> Additional Drainage Works
S1-4260	Backfilling (Remaining)	16	0	01APR09	25APR09	49d	S1-4241	S1-4421, S1-4430	<input type="checkbox"/> Backfilling (Remaining)
Roadworks									
S1-4421	Footpath Remedial Works	4	0	27APR09	30APR09	49d	S1-4260	ZAKD001	<input type="checkbox"/> Footpath Remedial Works
S1-4430	Street Furniture remedial works	4	0	27APR09	30APR09	49d	S1-4260	ZAKD001	<input type="checkbox"/> Street Furniture remedial works
Zone E (CH. 3100 - 4012)									
Slope Works									
S1-5151	V.O. 202	163	42	02DEC08 A	30JUN09	0		ZAKD001	<input type="checkbox"/> V.O. 202
Retaining Wall RW10									
S1-5350	Additional drainage vks @ ch 3403	22	0	01APR09	30APR09	49d		ZAKD001	<input type="checkbox"/> Additional drainage vks @ ch 3403
Retaining Wall RW11									
S1-5450	Additional drainage works	95	25	01FEB09 A	30MAY09	0		S1-5838, S1-5847	<input type="checkbox"/> Additional drainage works
S1-5463	Backfilling	95	25	01FEB09 A	30MAY09	0		S1-5838, S1-5847	<input type="checkbox"/> Backfilling
Roadworks									
S1-5845	Additional drainage works	254	76	02JUN08 A	30MAY09	0		S1-5838, S1-5847	<input type="checkbox"/> Additional drainage works
S1-5847	Footpath and verge remedial works	28	0	01JUN09	30JUN09	0	S1-5450, S1-5463, S1-5848	ZAKD001	<input type="checkbox"/> Footpath and verge remedial works
S1-5838	Additional street furniture	26	0	01JUN09	30JUN09	0	S1-5450, S1-5463, S1-5848	ZAKD001	<input type="checkbox"/> Additional street furniture
Zone F (CH. 4010 - 4650)									
Retaining Wall RW16									
S1-6355	Additional nosing	14	0	16MAR09	31MAR09	71d		ZAKD001	<input type="checkbox"/> Additional nosing
Retaining Wall RW38									
S1-6530	Additional drainage works	72	33	01FEB09 A	30APR09	49d		ZAKD001	<input type="checkbox"/> Additional drainage works
Culvert at CH. 4631									
S1-6515	1050mm dia. pipeline under existing TCR	29	55	11FEB09 A	16MAR09	84d		ZAKD001	<input type="checkbox"/> 1050mm dia. pipeline under existing TCR

Start date	23.JAN04	<input type="checkbox"/> Each bar
Finish date	30.AUG12	<input type="checkbox"/> Progress bar
Date data	01.MAR09	<input type="checkbox"/> Critical bar
Number/Version	Revision 10	<input type="checkbox"/> Summary bar
Page number	1A	<input type="checkbox"/> Summary point
Project name	SU18A	<input type="checkbox"/> Start milestone point
© Primavera Systems, Inc.		<input type="checkbox"/> Finish milestone point

Contract No. HY2003/19
 Improvement to Tung Chung Road
 Works Programme Rev. 15

Date	Revision	Checked	Approved
27MAR09	Revision 15		

ACT ID	Description	Orig. Dur	Comp.	ACT STARTS	ACT FINISH	ACT PLAN	ACT STATUS	ACT COMMENTS
S1-6722	Road Junction @ ch4300	54	35	07FEB09 A	15APR09	46d		S1-6724, S1-6725
S1-6723	Road Junction @ ch4570	34	35	07FEB09 A	15APR09	46d		S1-6724, S1-6725
S1-6724	Additional footpath & verge	13	0	18APR09	30APR09	49d	S1-6722, S1-6723	ZAKD001
S1-6725	Additional street furniture	13	0	18APR09	30APR09	49d	S1-6722, S1-6723	ZAKD001
Pump House for Fire Hydrant @ CH. 4368								
S1-6922	Testing & commissioning	66	50	01MAY09 A	30APR09	46d		S1-6923
S1-6923	Fencing & ground level works	48	0	02MAR09	30APR09	49d	S1-6922	ZAKD001
Transformer Room at CH. 4360								
S1-6903	Fencing & ground level works	22	0	01APR09 *	30APR09	49d		ZAKD001
Zone F (CH. 4010 - 4866)								
Landscape Softworks								
S1-6910	Landscape Softworks	123	0	01APR09 *	31AUG09	0		S1-6920
Establishment works								
S1-6920	Establishment Works for Section 1A (chain no.084)	710	0	01SEP09 *	31AUG11	0	S1-6910	ZAKD003
Section 2A								
Remaining Works								
S2-1250	Completion of section 2	0	100		06FEB09 A			ZAKD002
S2-1500	Defects and Outstanding Works	300	9	07FEB09 A	06FEB10	783d		
Section 2B								
Zone J-S								
Landscape Softworks								
S2-6730	Landscape Softworks	422	65	01APR09 A	31AUG09	0		S2-6740
Establishment works								
S2-6740	Establishment Works for Section 2A	710	0	01SEP09	31AUG11	0	S2-6730	ZAKD004
Section 3								
Feature No. 13NE-B/C65								
S3-3030	Install soil nail (199 nos.)	29	86	31JAN09 A	05MAR09	396d	S3-3010	S3-3040, S3-3050
S3-3040	Slope surface protection	14	0	06MAR09	21MAR09	813d	S3-3020, S3-3030	S3-3070
Feature No. 13NE-B/C64								
S3-3050	Install soil nail (127 nos.)	20	0	16MAR09	28MAR09	396d	S3-3030	S3-3060
S3-3060	Pull out tests (4 nos.)	3	0	30MAR09	08APR09	396d	S3-3050	S3-3065
S3-3065	300mm u-channel at crest & toe	20	0	06APR09	07MAY09	396d	S3-3060	S3-3070, S3-3080
S3-3070	Slope surface protection	14	0	05MAY09	23MAY09	579d	S3-3040, S3-3065	S3-3110
Feature No. 13NE-B/C63								
S3-3080	Install soil nail (111 nos.)	19	0	06MAY09	30MAY09	396d	S3-3065	S3-3090

Start date	28JUN04	<input type="checkbox"/> Early bar
Finish date	30AUG11	<input type="checkbox"/> Progress bar
Code date	01MAY09	<input type="checkbox"/> Critical bar
Number/Version	Revision 1.0	<input type="checkbox"/> Summary bar
Page number	2A	<input type="checkbox"/> Summary point
Project name	RV18A	<input type="checkbox"/> Start milestone point
Primevara Systems, Inc.		<input type="checkbox"/> Finish milestone point

Contract No. HY2003/19
 Improvement to Tung Chung Road
 Works Programme Rev. 16

Date	Revision	Checked	Approved
27MAR09	Revision 1.0		

ID	Description	On	Comp	Start	End	Plan	Precedence	Location	Remarks
S3-3090	Pull out test (5 nos.)	8	0	01JUN09	09JUN09	396d	S3-3060	S3-3100	0 Pull out test (5 nos.)
S3-3100	300mm stepped & u-channel	20	0	10JUN09	03JUL09	396d	S3-3090	S3-3110, S3-3120	<input type="checkbox"/> 300mm stepped & u-channel
S3-3110	Slope surface protection	14	0	04JUL09	20JUL09	549d	S3-3070, S3-3100	S3-3150	<input type="checkbox"/> Slope surface protection
Feature No. 13HE-B/C62									
S3-3120	Install soil nail (144 nos.)	22	0	04JUL09	29JUL09	396d	S3-3100	S3-3130	<input type="checkbox"/> Install soil nail (144 nos.)
S3-3130	Pull out tests (5 nos.)	8	0	30JUL09	07AUG09	396d	S3-3120	S3-3140	0 Pull out tests (5 nos.)
S3-3140	300mm stepped & u channel	20	0	08AUG09	31AUG09	396d	S3-3130	S3-3150, S3-3160	<input type="checkbox"/> 300mm stepped & u channel
S3-3150	Slope surface protection	14	0	01SEP09	16SEP09	510d	S3-3110, S3-3140	S3-3220	<input type="checkbox"/> Slope surface protection
Feature No. 13HE-B/F64									
S3-3160	Recompact slope	14	0	01SEP09	16SEP09	396d	S3-3140	S3-3170	<input type="checkbox"/> Recompact slope
S3-3170	Reconstruct 750mm stepped channel & stairway	20	0	17SEP09	10OCT09	366d	S3-3160	S3-3180, S3-3190	<input type="checkbox"/> Reconstruct 750mm stepped channel & stairway
S3-3180	300mm u channel	14	0	12OCT09	28OCT09	687d	S3-3170		<input type="checkbox"/> 300mm u channel
Feature No. 13HE-B/C63									
S3-3190	Install soil nail (42 nos.)	12	0	12OCT09	24OCT09	396d	S3-3170	S3-3200	<input type="checkbox"/> Install soil nail (42 nos.)
S3-3200	Pull out test (1 nos.)	8	0	27OCT09	04NOV09	396d	S3-3190	S3-3210	0 Pull out test (1 nos.)
S3-3210	300mm u channel	14	0	05NOV09	20NOV09	396d	S3-3200	S3-3220, S3-3230	<input type="checkbox"/> 300mm u channel
S3-3220	Slope surface protection	14	0	21NOV09	07DEC09	456d	S3-3150, S3-3210	S3-3260	<input type="checkbox"/> Slope surface protection
Feature No. 13HE-B/C233									
S3-3230	Install soil nail (44 nos.)	12	0	21NOV09	04DEC09	396d	S3-3210	S3-3240	<input type="checkbox"/> Install soil nail (44 nos.)
S3-3240	Pull out tests (2 nos.)	8	0	05DEC09	14DEC09	396d	S3-3230	S3-3250	0 Pull out tests (2 nos.)
S3-3250	Reconstruct 300mm u channel	14	0	15DEC09	02JAN10	396d	S3-3240	S3-3260, S3-3270	<input type="checkbox"/> Reconstruct 300mm u channel
S3-3260	Slope surface protection	20	0	04JAN10	28JAN10	436d	S3-3220, S3-3250	S3-3300	<input type="checkbox"/> Slope surface protection
Feature No. 13HE-B/C/R72									
S3-3270	Install soil nail (113 nos.)	20	0	04JAN10	28JAN10	396d	S3-3250	S3-3280	<input type="checkbox"/> Install soil nail (113 nos.)
S3-3280	Pull out tests (3 nos.)	8	0	27JAN10	04FEB10	396d	S3-3270	S3-3290	0 Pull out tests (3 nos.)
S3-3290	300mm u channel	14	0	06FEB10	23FEB10	396d	S3-3280	S3-3300, S3-3310	<input type="checkbox"/> 300mm u channel
S3-3300	Slope surface protection	20	0	24FEB10	18MAR10	414d	S3-3260, S3-3290	ZAKD005	<input type="checkbox"/> Slope surface protection
Feature No. 13HE-B/F/R68									
S3-3310	Remove existing rubble wall	10	0	24FEB10	06MAR10	356d	S3-3290	S3-3320	0 Remove existing rubble wall
S3-3320	Recompact slope	14	0	08MAR10	23MAR10	396d	S3-3310	S3-3330	<input type="checkbox"/> Recompact slope
S3-3330	300mm u channel at toe	14	0	24MAR10	12APR10	396d	S3-3320	ZAKD005	<input type="checkbox"/> 300mm u channel at toe
Feature No. 13HE-B/C/115									
S3-3370	Slope surface protection	14	36	24FEB09 A	11MAR09	588d	S3-3360	S3-3410	<input type="checkbox"/> Slope surface protection
Feature No. 13HE-B/C/116									
S3-3350	Install soil nail (75 nos.)	14	0	02APR09	22APR09	0	S3-3390	S3-3390	<input checked="" type="checkbox"/> Install soil nail (75 nos.)
S3-3390	Pull out tests (4 nos.)	8	0	23APR09	04MAY09	0	S3-3380	S3-3400	<input checked="" type="checkbox"/> Pull out tests (4 nos.)
S3-3400	300mm u channel at toe	14	0	05MAY09	20MAY09	0	S3-3390	S3-3410, S3-3420	<input checked="" type="checkbox"/> 300mm u channel at toe

Start date	28 AUG 04	<input type="checkbox"/> Early bar
End date	30 AUG 12	<input type="checkbox"/> Progress bar
As date	01 MAR 09	<input type="checkbox"/> Critical bar
Member/Version	Rev: 1.0 / 1.0	<input type="checkbox"/> Summary bar
Page number	46	<input type="checkbox"/> Summary point
Project name	RV16A	<input type="checkbox"/> Start milestone point
© Primavera Systems, Inc.		<input type="checkbox"/> Finish milestone point

Contract No. HY/2003/19
Improvement to Tung Chung Road
Works Programme Rev. 16

Date	Revision	Checked	Approved
27/MAR/09	Revision 10		

Item No.	Description	Orig. Dur.	Comp.	Start	Finish	Total	Contract	Item No.
S3-3410	Slope surface protection	20	0	21MAY09	13JUN09	54d	S3-3370, S3-3400, S3-3700	S3-3400
Feature No. 13NE-B/C1722								
S3-3420	Recompact slope	20	0	21MAY09	13JUN09	0	S3-3400	S3-3430
S3-3430	300mm stepped & u channel at crest & toe	20	0	15JUN09	08JUL09	0	S3-3420	S3-3440
Feature No. 13NE-B/C1700								
S3-3440	Recompact slope	20	0	09AUG09	31JUL09	0	S3-3430	S3-3450
S3-3450	300mm stepped & u channel at crest & toe	20	0	01AUG09	24AUG09	0	S3-3440	S3-3460
Feature No. 13NE-B/C117								
S3-3460	Install soil nail (33 nos.)	10	0	25AUG09	04SEP09	0	S3-3450	S3-3470
S3-3470	Pull out tests (2 nos.)	8	0	06SEP09	14SEP09	0	S3-3460	S3-3480
S3-3480	300mm u channel	14	0	15SEP09	30SEP09	0	S3-3470	S3-3490, S3-3500
S3-3490	Slope surface protection	20	0	02OCT09	24OCT09	45d	S3-3480, S3-3490	S3-3530
Feature No. 13NE-B/C244								
S3-3500	Install soil nail (69 nos.)	17	0	02OCT09	21OCT09	0	S3-3490	S3-3510
S3-3510	Pull out tests (3 nos.)	8	0	22OCT09	31OCT09	0	S3-3500	S3-3520
S3-3520	300mm stepped & u channel at crest	20	0	02NOV09	24NOV09	0	S3-3510	S3-3530, S3-3540
S3-3530	Slope surface protection	20	0	25NOV09	17DEC09	42d	S3-3490, S3-3520	S3-3590
Feature No. 13NE-B/C185								
S3-3540	Remove existing concrete wall	7	0	25NOV09	02DEC09	0	S3-3520	S3-3550
S3-3550	Recompact slope	20	0	03DEC09	28DEC09	0	S3-3540	S3-3580
S3-3560	300mm stepped & u channel at toe	20	0	29DEC09	21JAN10	0	S3-3550	S3-3570
Feature No. 13NE-B/C114								
S3-3570	Install soil nail (136 nos.)	20	0	23JAN10	13FEB10	0	S3-3560	S3-3580, S3-3600
S3-3580	Pull out tests (4 nos.)	8	0	17FEB10	25FEB10	35d	S3-3570	S3-3590, S3-3600
S3-3590	Slope surface protection	20	0	26FEB10	20MAR10	37d	S3-3580, S3-3590	S3-3630
Feature No. 13NE-B/C113								
S3-3600	Install soil nail (29 nos.)	11	0	26FEB10	10MAR10	35d	S3-3580	S3-3610
S3-3610	Pull out tests (2 nos.)	8	0	11MAR10	19MAR10	35d	S3-3600	S3-3620
S3-3620	Reconstruct 300mm u channel	14	0	20MAR10	08APR10	35d	S3-3610	S3-3630, S3-3640
S3-3630	Slope surface protection	20	0	09APR10	03MAY10	35d	S3-3600, S3-3620	S3-3680
Feature No. TCR/UF/C/27								
S3-3640	Install soil nail (55 nos.)	12	0	08APR10	22APR10	35d	S3-3620	S3-3650
S3-3650	Pull out tests (2 nos.)	8	0	23APR10	03MAY10	35d	S3-3640	S3-3660
S3-3660	Slope surface protection	20	0	04MAY10	27MAY10	35d	S3-3630, S3-3650	ZAKDO05
Feature No. 13NE-B/C243								
S3-3670	Install soil nail (16 nos.)	10	0	02MAR09	12MAR09	0	S3-3360	S3-3680

<input type="checkbox"/> Slope surface protection
<input checked="" type="checkbox"/> Recompact slope
<input checked="" type="checkbox"/> 300mm stepped & u channel at crest & toe
<input checked="" type="checkbox"/> Recompact slope
<input checked="" type="checkbox"/> 300mm stepped & u channel at crest & toe
<input checked="" type="checkbox"/> Install soil nail (33 nos.)
<input checked="" type="checkbox"/> Pull out tests (2 nos.)
<input checked="" type="checkbox"/> 300mm u channel
<input type="checkbox"/> Slope surface protection
<input checked="" type="checkbox"/> Install soil nail (69 nos.)
<input checked="" type="checkbox"/> Pull out tests (3 nos.)
<input checked="" type="checkbox"/> 300mm stepped & u channel at crest
<input type="checkbox"/> Slope surface protection
<input checked="" type="checkbox"/> Remove existing concrete wall
<input checked="" type="checkbox"/> Recompact slope
<input checked="" type="checkbox"/> 300mm stepped & u channel at toe
<input checked="" type="checkbox"/> Install soil nail (136 nos.)
<input checked="" type="checkbox"/> Pull out tests (4 nos.)
<input type="checkbox"/> Slope surface protection
<input type="checkbox"/> Install soil nail (29 nos.)
<input type="checkbox"/> Pull out tests (2 nos.)
<input type="checkbox"/> Reconstruct 300mm u channel
<input type="checkbox"/> Slope surface protection
<input type="checkbox"/> Install soil nail (55 nos.)
<input type="checkbox"/> Pull out tests (2 nos.)
<input type="checkbox"/> Slope surface protection
<input checked="" type="checkbox"/> Install soil nail (16 nos.)

Start date	21JUN04	<input type="checkbox"/> Early bar
Finish date	30MAY12	<input checked="" type="checkbox"/> Progress bar
Date date	01MAR09	<input checked="" type="checkbox"/> Critical bar
Number/revision	Revision 16	<input type="checkbox"/> Summary bar
Page number	54	<input checked="" type="checkbox"/> Summary point
Project name	RV1&A	<input checked="" type="checkbox"/> Start milestone point
© Primavera Systems, Inc.		<input checked="" type="checkbox"/> Finish milestone point

Contract No. HY/2003/19
Improvement to Tung Chung Road
Works Programme Rev. 16

Date	Revision	Checked	Approved
27MAR09	Revision 16		

ID	Description	Orig. Dur	Comp	Start	End	Plan	Resources	Success
S3-3680	Pull out test (1 nos.)	8	0	13MAR09	21MAR09	0	S3-3670	S3-3680
S3-3690	300mm tr channel at toe	14	0	23MAR09	08APR09	0	S3-3680	S3-3380, S3-3700
S3-3700	Slope surface protection	20	0	08APR09	07MAY09	555d	S3-3690	S3-3410
Utilities								
S3-3600	Utilities installation	540	0	22JAN10	31JUL11	0	S3-3570	ZAKD006
Section 3A (Claim no. 084)								
Landscape Softworks								
S3-3805	Landscape softworks	124	0	01APR10	31AUG10	0		S3-3810
Establishment works								
S3-3810	Establishment Works for Section 3A (claim no.084)	719	0	01SEP10	30AUG12	0	S3-3805	ZAKD008
Undefined Section of Works								
Zone B (CH. 1665 - 2150)								
Straining & Deflection Structure SD 2-5								
S1-2420	Additional Stairway	38	0	16MAR09	30APR09	49d		ZAKD007
Straining & Deflection Structure DT-1-1								
S1-2460	Additional Stairway	38	0	16MAR09	30APR09	49d		ZAKD007
Straining & Deflection Structure SD 4-7								
S1-2503	Additional Stairway & drainage works	88	35	01FEB09 A	25APR09	49d		S1-2631
Flexible Debris Barrier at CH. 1700 (DFB1)								
S1-2580	Boulder mitigation stream S-8	72	33	02FEB09 A	30APR09	49d	S1-2550	ZAKD007
Flexible Debris Barrier at CH. 1800 (DFB2)								
S1-2931	Remaining Barrier (affected by SD4-7)	4	0	27APR09	30APR09	49d	S1-2500	ZAKD007
Zone C (CH. 2130 - 2725)								
Straining & Deflection Structure SD 5-11								
S1-3708	Additional slope works & drainage works	85	33	01FEB09 A	30APR09	56d		ZAKD007
Zone D (CH. 2725 - 3100)								
Straining & Deflection Structure SD 6-12								
S1-4462	Additional slope works & drainage works	85	33	01FEB09 A	30APR09	56d		ZAKD007
Straining & Deflection Structure SD 7-13								
S1-4562	Additional slope works & drainage works	85	33	01FEB09 A	30APR09	56d		ZAKD007
Zone E (CH. 3100 - 4010)								
Straining & Deflection Structure SD 10-18								
S1-5902	Additional slope works & drainage works	143	20	01FEB09 A	30JUN09	0		ZAKD007
Landscape Works in Undefined Section								








<input type="checkbox"/> Pull out test (1 nos.)
<input checked="" type="checkbox"/> 300mm tr channel at toe
<input type="checkbox"/> Slope surface protection
<input type="checkbox"/> Utilities installation
<input type="checkbox"/> Landscape softworks
<input type="checkbox"/> Additional Stairway
<input type="checkbox"/> Additional Stairway
<input type="checkbox"/> Additional Stairway & drainage works
<input type="checkbox"/> Boulder mitigation stream S-8
<input type="checkbox"/> Remaining Barrier (affected by SD4-7)
<input type="checkbox"/> Additional slope works & drainage works
<input type="checkbox"/> Additional slope works & drainage works
<input type="checkbox"/> Additional slope works & drainage works
<input type="checkbox"/> Additional slope works & drainage works
<input type="checkbox"/> Additional slope works & drainage works

Start date	26JUL04	<input type="checkbox"/> Early bar
Finish date	30AUG12	<input checked="" type="checkbox"/> Progress bar
Data date	01MAR09	<input checked="" type="checkbox"/> Critical bar
Number/Version	Revision 16	<input type="checkbox"/> Summary bar
Page number	6A	<input type="checkbox"/> Summary point
Project name	RV16A	<input checked="" type="checkbox"/> Start milestone point
© Primavera Systems, Inc.		<input checked="" type="checkbox"/> Finish milestone point

Contract No. HY/2003/19
 Improvement to Tung Chung Road
 Works Programme Rev. 16

Date	Revision	Checked	Approved
27MAR09	Revision 16		

ACT ID	Description	Orig Bar	Comp	Early Start	Early Finish	Total Float	Predecessors	Successors	Bill
S2-8000	Landscape Softworks In Undefined Section	145	0	01APR09*	31AUG09	0 S2-8725	S2-8010		1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31
S2-8010	Establishment Works for Undefined Section	710	0	01SEP09*	31AUG11	0 S2-8000	ZAKDC68		1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31

act date	25JUN04		Early bar
dash date	30AUG12		Progress bar
eta date	01MAR09		Critical bar
ambact/version	Revision 16		Summary bar
age number	TA		Summary point
client name	RV1&&		Start milestone point
client name	Fluoroc Systems, Inc.		Finish milestone point

Contract No. HY/2003/19
 Improvement to Tung Chung Road
 Works Programme Rev. 16

Date	Revision	Checked	Approved
27MAR06	Revision 16		

APPENDIX O
WASTE GENERATED QUANTITY

Contract No. HY/2003/19 – Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha

Name of Department: Highways Department

Project Commencement Date: June 2004

Construction Completion Date: December 2009

Approved Project Cost: \$688.5 Million

Monthly Summary Waste Flow Table for Year 2007

Year	Actual Quantities of inert C&D Materials (in 10 ³ m ³)					Actual Quantities of C&D Wastes (in 10 ³ Kg)									
	Total Quantity Generated	Broken Concrete ⁽¹⁾	Reused in the Contract	Reused in other Projects	Disposed as Public Fill	Metals		Paper/cardboard packaging		Plastic ⁽²⁾		Chemical Waste	Site clearance waste ⁽³⁾	Others, e.g. general refuse (in 10 ³ m ³)	
						Disposal	Recycle	Disposal	Recycle	Disposal	Recycle	Disposal	Disposal	Disposal	Timber Waste
(a)	(b)	(c)	(d)	(e)											
Jan	4.937	0	14.520	0.540	1.397	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	73.61	1.5	0
Feb	4.135	0	8.746	3.540	1.496	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	34.21	1.5	0
Mar	4.954	0	9.978	3.560	2.975	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	173.27	2.0	0
Apr	2.976	0	9.010	0	0.911	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	84.83	2.2	0
May	3.513	0	10.156	0	1.555	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	101.24	1.3	0
Jun	5.882	0	11.020	0	8.588	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	52.51	1.7	0
Sub-Total	26.397	0	63.430	7.640	16.922	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	519.67	10.2	0
July	3.458	0	10.240	0	1.287	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	85.11	1.140	0.060
Aug	3.627	0	11.144	0	0.946	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	91.00	1.710	0.090
Sept	4.350	0	13.336	0	1.165	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	54.58	1.615	0.085
Oct	4.122	0	12.242	0	1.497	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	72.81	1.710	0.090
Nov	3.116	0	8.747	0	1.640	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	180.53	1.995	0.105
Dec	3.392	0	10.234	0	1.072	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	63.99	2.090	0.110
Total	48.462	0	129.373	7.640	24.529	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	1003.70	16.260	0.540

Note: * Very small quantity of aluminum can, cardboard package and plastic bottle generated from site office were collected by the local resident.

(1) Broken concrete for recycling into aggregates

(2) Plastics refer to plastic bottles/containers, plastic sheets/foam from package material.

(3) Site clearance waste refers to vegetation and construction debris.

(4) Please note that the total quality generated is not equivalent to the summation of the items in column (b) to (e) as part of the quality of the reused material (column c) had been counted already.

Contract No. HY/2003/19 – Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha

Name of Department: Highways Department

Project Commencement Date: June 2004

Construction Completion Date: December 2009

Approved Project Cost: \$688.5 Million

Monthly Summary Waste Flow Table for Year 2008

Year	Actual Quantities of inert C&D Materials (in 10 ³ m ³)					Actual Quantities of C&D Wastes (in 10 ³ Kg)									
	Total Quantity Generated	Broken Concrete ⁽¹⁾	Reused in the Contract	Reused in other Projects	Disposed as Public Fill	Metals		Paper/cardboard packaging		Plastic ⁽²⁾		Chemical Waste	Site clearance waste ⁽³⁾	Others, e.g. general refuse (in 10 ³ m ³)	
						Disposal	Recycle	Disposal	Recycle	Disposal	Recycle	Disposal	Disposal	Disposal	Timber Waste
(a)	(b)	(c)	(d)	(e)											
Jan	1.230	0	1.128	0	0.102	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	73.61	1.235	0.065
Feb	1.875	0	0.762	0	1.113	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	34.21	1.425	0.075
Mar	1.064	0	0.858	0	0.206	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	56.82	1.520	0.080
Apr	0.994	0	0.765	0	0.229	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	84.54	1.900	0.100
May	1.335	0	1.020	0	0.315	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	78.21	1.752	0.095
Jun	0.755	0	0.467	0	0.288	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	86.76	1.895	0.124
Sub-Total	7.253	0	4.997	0	2.253	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	414.15	9.727	0.539
July	0.953	0	0.685	0	0.268	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	96.88	2.036	0.098
Aug	2.875	0	5.978	0	0.758	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	89.33	2.189	0.127
Sept	1.954	0	1.628	0	0.985	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	85.66	2.078	0.213
Oct	2.543	0	1.829	0	1.075	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	95.67	2.457	0.478
Nov	3.158	0	1.954	0	1.652	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	128.21	2.738	0.389
Dec	2.878	0	1.862	0	1.877	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	120.54	2.548	0.326
Total	21.609	0	18.925	0	8.854	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	1030.44	23.773	2.163

Note: * Very small quantity of aluminum can, cardboard package and plastic bottle generated from site office were collected by the local resident.

(1) Broken concrete for recycling into aggregates

(2) Plastics refer to plastic bottles/containers, plastic sheets/foam from package material.

(3) Site clearance waste refers to vegetation and construction debris.

(4) Please note that the total quality generated is not equivalent to the summation of the items in column (b) to (e) as part of the quality of the reused material (column c) had been counted already.

Contract No. HY/2003/19 – Improvement to Tung Chung Road between Lung Tseng Tau and Cheung Sha

Name of Department: Highways Department

Project Commencement Date: June 2004

Construction Completion Date: December 2009

Approved Project Cost: \$688.5 Million

Monthly Summary Waste Flow Table for Year 2009

Year	Actual Quantities of inert C&D Materials (in 10 ³ m ³)					Actual Quantities of C&D Wastes (in 10 ³ Kg)									
	Total Quantity Generated	Broken Concrete ⁽¹⁾	Reused in the Contract	Reused in other Projects	Disposed as Public Fill	Metals		Paper/cardboard packaging		Plastic ⁽²⁾		Chemical Waste	Site clearance waste ⁽³⁾	Others, e.g. general refuse (in 10 ³ m ³)	
						Disposal	Recycle	Disposal	Recycle	Disposal	Recycle	Disposal	Disposal	Disposal	Timber Waste
(a)	(b)	(c)	(d)	(e)											
Jan	2.130	0	2.130	0	0	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	0	0	0
Feb	3.158	0	1.954	0	1.652	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	128.21	2.738	0.389
Mar	3.408	0	1.267	0	2.564	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	96.57	2.546	0.234
Apr	7.562	0	1.874	0	3.638	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	135.66	4.388	0.504
May	1.743	0	1.743	0	0	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	0	0	0
Jun	1.054		1.257	0	0.355	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	38.66	0.865	0.128
Sub-Total	19.055	0	10.225	0	8.209	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	399.1	10.537	1.255
July															
Aug															
Sept															
Oct															
Nov															
Dec															
Total	19.055	0	10.225	0	8.209	N/A*	N/A*	N/A*	N/A*	N/A*	N/A*	0	399.1	10.537	1.255

Note: * Very small quantity of aluminum can, cardboard package and plastic bottle generated from site office were collected by the local resident.

(1) Broken concrete for recycling into aggregates

(2) Plastics refer to plastic bottles/containers, plastic sheets/foam from package material.

(3) Site clearance waste refers to vegetation and construction debris.

(4) Please note that the total quality generated is not equivalent to the summation of the items in column (b) to (e) as part of the quality of the reused material (column c) had been counted already.