





Permanent Aviation Fuel Facility (EP-262/2007/B)

Thirty-Sixth Monthly Environmental Monitoring and Audit Report – October 2009

9 November 2009

Environmental Resources Management 21/F Lincoln House

Taikoo Place, 979 King's Road Island East, Hong Kong Telephone 2271 3000 Facsimile 2723 5660

www.erm.com





# Permanent Aviation Fuel Facility for Hong Kong International Airport

# Environmental Certification Sheet EP-262/2007/B

| Document/Plan to be Certified/ Verified: | 36th Monthly EM&A Report - October 2009 |
|--|---|
| Date of Report:                          | 9 November 2009                         |
|  |   |
| Date prepared by ET:                     | 9 November 2009                         |
| Date received by IEC:                    | 9 November 2009                         |
|  | 9 November 2009                         |

#### **Reference EP Condition**

**Reference Document/Plan** 

|   | Envir | conmental Permit Condition:                     | Condition No.: 5.3   |
|---|-------|---|--|
| l | Conte | nt: Environmental Monitoring and Audit          | (EM&A) for the Project   |
|   | 5.3   | Director within 2 weeks after the end of the re | the monthly EM&A Report for the Project shall be submitted to the porting month. The submissions shall be certified by the ET Leader the Director. Additional copies of the submission shall be provided |

#### ET Certification

| hereby certify that the above referenced document/plan complies with the above referenced condition of |
|--|
| P-262/2007/B   |
|  |

Craig A Reid, Environmental Team Leader:

Date:

9 November 2009

#### **IEC Verification**

R P

I hereby verify that the above referenced document/plan complies with the above referenced condition of EP-262/2007/B

Dr Guiyi Li, Independent Environmental Checker:

| Date: |  |
|-------|--|
|       |  |

16 Nov 2009

Notes: EP-262/2007/B has replaced the former EP-262/2007/A, EP-262/2007 and EP-139-2002/A for the PAFF project after the resubmission of revised EM&A Manual and revised EIA Report respectively.

# Permanent Aviation Fuel Facility (EP-262/2007/B)

Thirty-Sixth Monthly Environmental Monitoring and Audit Report – October 2009

9 November 2009

Prepared by: Francesca Zino/ Karen Lui/ Craig A Reid

Document Code: 0018105\_EMAR\_Oct 09\_v0.doc

| For and on behalf of<br>Environmental Resources Management |                           |  |
|--|---------------------------|--|
| Approved by:   | Craig A Reid              |  |
| Signed:  | Cif?                      |  |
| Position:  | Environmental Team Leader |  |
| Date:  | 9 November 2009           |  |

This report has been prepared by Environmental Resources Management the trading name of 'ERM Hong-Kong, Limited', with all reasonable skill, care and diligence within the terms of the Contract with the client, incorporating our General Terms and Conditions of Business and taking account of the resources devoted to it by agreement with the client.

We disclaim any responsibility to the client and others in respect of any matters outside the scope of the above.

This report is confidential to the client and we accept no responsibility of whatsoever nature to third parties to whom this report, or any part thereof, is made known. Any such party relies on the report at their own risk.



|      | EXECUTIVE SUMMARY   | Ι    |
|------|---|------|
| 1    | INTRODUCTION  | 1    |
| 1.1  | Purpose of the Report   | 1    |
| 2    | ENVIRONMENTAL STATUS  | 2    |
| 2.1  | Project Area  | 2    |
| 2.2  | ENVIRONMENTAL SENSITIVE RECEIVERS                             | 2    |
| 2.3  | MAJOR CONSTRUCTION ACTIVITIES                                 | 2    |
| 2.4  | MONITORING SCHEDULE OF THE REPORTING MONTH                    | 3    |
| 2.5  | STATUS OF ENVIRONMENTAL APPROVAL DOCUMENTS                    | 3    |
| 2.6  | COMMUNITY LIAISON GROUP MEETING                               | 6    |
| 2.7  | SUMMARY OF NON-COMPLIANCE WITH THE ENVIRONMENTAL QUALITY      |      |
|      | PERFORMANCE LIMITS  | 6    |
| 2.8  | SUMMARY OF ENVIRONMENTAL COMPLAINTS                           | 6    |
| 2.9  | SUMMARY OF ENVIRONMENTAL SUMMONS                              | 6    |
| 3    | ENVIRONMENTAL ISSUES AND ACTIONS                              | 7    |
| 3.1  | PREVIOUS ENVIRONMENTAL DEFICIENCIES AND FOLLOW-UP ACTIONS     | 7    |
| 3.2  | IMPLEMENTATION STATUS ON ENVIRONMENTAL PROTECTION REQUIREMENT | rs 8 |
| 4    | ENVIRONMENTAL MONITORING                                      | 9    |
| 4.1  | AIR AND NOISE   | 9    |
| 4.2  | WATER QUALITY   | 9    |
| 4.3  | <b>POPs Monitoring</b>  | 9    |
| 4.4  | WASTE MANAGEMENT  | 9    |
| 4.5  | Cultural Heritage   | 9    |
| 4.6  | LANDSCAPE AND VISUAL  | 9    |
| 4.7  | LAND CONTAMINATION, HAZARD TO LIFE AND FUEL SPILL RISK        | 9    |
| 4.8  | ECOLOGY   | 10   |
| 4.9  | EM&A MANUAL   | 10   |
| 4.10 | BASELINE WATER QUALITY MONITORING                             | 10   |
| 5    | FUTURE KEY ISSUES   | 11   |
| 5.1  | KEY ISSUES FOR THE NEXT MONTH                                 | 11   |
| 5.2  | IMPACT PREDICTION FOR THE NEXT MONTH                          | 11   |
| 5.3  | WORKS AND MONITORING SCHEDULE FOR THE NEXT MONTH              | 11   |

#### LIST OF TABLES

- Table 2.1Summary of Works Undertaken During the Reporting Period
- Table 2.2Cumulative Quantity of Excavated Marine Sediments
- Table 2.3Summary of Environmental Licensing, Notification and Permit<br/>Status

#### LIST OF ANNEXES

- Annex A Project Location
- Annex B Water Quality and Ecological Sensitive Receivers
- Annex C Cumulative Complaints Statistics
- Annex D Implementation Programme of Mitigation Measures

## EXECUTIVE SUMMARY

The construction works for the Permanent Aviation Fuel Facility resumed on 9 July 2007. This **thirty-sixth** monthly Environmental Monitoring and Audit (EM&A) report presents the EM&A work carried out during the period from **1 October** to **31 October 2009** in accordance with the *EM&A Manual*.

Breaches of all Action and Limit Levels

No water quality monitoring was conducted (due to no dredging work) during the reporting period that required comparison against Action and Limit Levels.

Complaint Log

No environmental complaints were received during the reporting period.

Notifications of any Summons and Successful Prosecutions

No environmental summons or prosecutions were received in this reporting period.

Reporting Changes

There were no reporting changes in the reporting period.

Future Key Issues

- Dust release and suppression;
- Backfilling of rock armour over the pipelines; and,
- Dredging operation for the repair of pipeline.

1

Leighton Contractors (Asia) Limited (LCAL) has appointed ERM-Hong Kong, Limited (ERM) as the Environmental Team (ET) to implement the Environmental Monitoring and Audit (EM&A) programme for the Permanent Aviation Fuel Facility (the Project) during construction works.

The construction works for PAFF commenced in November 2005 based upon the previous EIA (*EIAO Register Number AEIAR-062-2002*) conducted and the Environmental Permit *EP-139/2002* granted on the 28<sup>th</sup> August 2002. Due to minor changes to the detailed layout of the site and the site boundary, application for Variation to the Environmental Permit (VEP) (*VEP-133/2004*) was submitted to the Director of Environmental Protection (DEP) for approval. The variation to the EP (*EP-139/2002/A*) was granted by the EPD in February 2004.

The decision by the EPD to grant the above Environmental Permit was, however, subject to a Judicial Review. The Judicial Review sided in the favour of the DEP, as did the subsequent Judgement from the Court of Appeal from the High Court for Judicial Review in March 2005. However, the DEP's decision to grant the EP was quashed by the Judgement of the Court of Final Appeal of July 2006.

The construction works were stopped following the Judgement of the Court of Final Appeal of July 2006. As such, in order to continue with the construction of the project, the project went through the statutory procedures under the EIAO again with a new design in order to obtain an environmental permit. The revised EIA was submitted in 2007 and the environmental permit (*EP-262/2007*) was granted in May 2007. *EP-262/2007* has been amended to *EP-262/2007/A* and issued by the EPD on 30 November 2007. A further Variation to the Environmental Permit was approved to allow dredging works to continue until March 2008. As such, *EP-262/2007/A* has been amended to *EP-262/2007/B* and was issued by the EPD on 27 February 2008.

The construction works and EM&A requirements were resumed on 9 July 2007 following the latest requirements of the *EP-262/2007/B* and *EM&A Manual*. Details regarding the EM&A requirements and changes should refer to the updated *EM&A Manual*. For the marine works, all piling activities were completed before the previous suspension of construction works in 2006.

#### 1.1 PURPOSE OF THE REPORT

This is the **thirty-sixth** EM&A Report which summarizes the monitoring results and audit findings for the EM&A programme during the reporting period from **1 October** to **31 October 2009**.

#### 2 ENVIRONMENTAL STATUS

#### 2.1 PROJECT AREA

The project area is in Area 38 of Tuen Mun and the pipelines are located in Urmston Road between Tuen Mun Area 38 and Sha Chau. The site is illustrated in *Annex A*.

#### 2.2 Environmental Sensitive Receivers

No air and noise sensitive receivers were identified close to the project area. However, water sensitive receivers and ecological sensitive receivers were identified in the EIA study, and are shown in *Annex B*.

#### 2.3 MAJOR CONSTRUCTION ACTIVITIES


A summary of the major works undertaken in this reporting period is shown in *Table 2.1*. Marine dredging operations were completed on 23 January 2009. *Table 2.2* presents the cumulative quantity of excavated materials up to that date. Daily and cumulative dredging production rates are illustrated in *Figure 2.1*.

#### Table 2.1Summary of Works Undertaken During the Reporting Period

| Area                     | Works undertaken   |  |  |
|--------------------------|--|--|--|
| Tuen Mun Area 38         | <ul> <li>Tank Farm, Roof Truss and Bund Wall Construction</li> <li>Permanent Drainage Construction</li> <li>Operational &amp; Fire Services Buildings Construction</li> <li>Jetty Works (Non-piling)</li> <li>Pre-Commission and Commissioning Activities for Phase 1A<br/>(the first four tanks)</li> </ul> |  |  |
| Submarine Pipeline Route | <ul><li>Riser connections at Sha Chau</li><li>Backfilling and placing of rock armour over the pipelines</li></ul>  |  |  |

#### Table 2.2 Cumulative Quantity of Excavated Marine Sediments

| Type of Excavated Materials            | Cumulative Bulk Volume (m <sup>3</sup> ) |
|--|--|
| From 17 December 2007 to 31 March 200  | 8  |
| Contaminated Mud                       | 105,974                                  |
| Uncontaminated Mud                     | 97,815                                   |
| From 1 September 2008 to 23 January 20 | 09                                       |
| Contaminated Mud                       | 0  |
| Uncontaminated Mud                     | 149,147                                  |

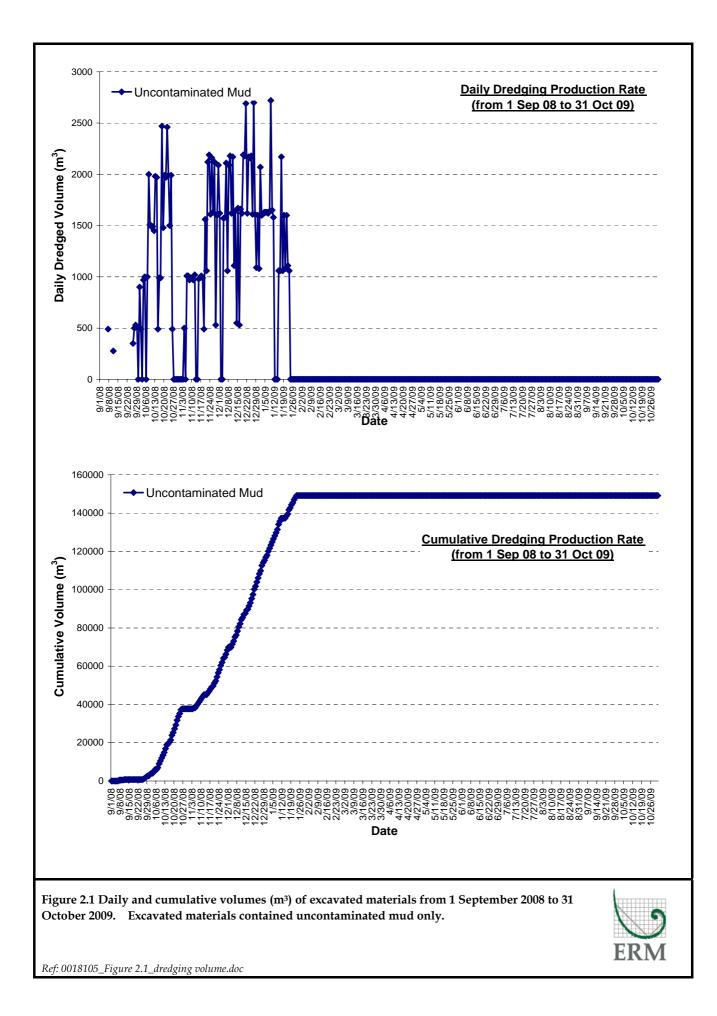

#### 2.4 MONITORING SCHEDULE OF THE REPORTING MONTH

No water quality monitoring was conducted during the reporting period, hence presentation of the monitoring schedule is not applicable.

#### 2.5 STATUS OF ENVIRONMENTAL APPROVAL DOCUMENTS

A summary of the relevant permits, licences, and/or notifications on environmental protection for this Project since July 2007 is presented in *Table* **2.3**.

#### Table 2.3Summary of Environmental Licensing, Notification and Permit Status

| Permit/ Licenses/   | Reference                   | Validity Period                            | Remarks   |
|---|-----------------------------|--|---|
| Notification  | Reference                   | validity i ellou                           | Kemarks   |
| Environmental Permit  | EP-262/2007/B               | Throughout<br>Project                      | Issued on 27 February<br>2008 ( <i>EP-262/2007/A</i> on 30<br>November 2007, <i>EP-<br/>262/2007</i> issued on 31 May<br>2007, <i>EP-139/2002</i><br>originally granted on 28<br>August 2002 and <i>EP-<br/>139/2002/A</i> granted on 24<br>February 2004 were<br>superseded)   |
| Chemical Waste<br>Producer Registration   | WPN 5111-421-L2174-<br>25   | Throughout<br>Project                      | Issued on 10 November<br>2005   |
| Notification of<br>Construction Works<br>under Air Pollution<br>Control (Construction<br>Dust) Regulation | H2104/U1D/5542/DG/<br>DH/PL | Throughout<br>Project                      | Notification on 6 July 2007   |
| Construction Noise<br>Permit  | GW-RW0676-07                | 21 December 2007<br>to 19 June 2008        | For land-based works<br>including air compressors,<br>breakers, excavators,<br>wheeled loaders, mobile<br>cranes, concrete lorry<br>mixers, hand-held pokers,<br>bar benders/cutters, wood<br>saws, grinders, submarine<br>water pump, lorries with<br>crane, dump trucks,<br>rollers, ventilation fans<br>and generators |
|   | GW-RW0677-07                | 21 December 2007<br>to 29 February<br>2008 | For marine dredging<br>operation including grab<br>dredger, tug boat, split<br>hopper barge and motor<br>sampan   |

| Permit/ Licenses/<br>Notification | Reference    | Validity Period                     | Remarks   |
|-----------------------------------|--------------|-------------------------------------|---|
| Notification                      | GW-RW0678-07 | 21 December 2007<br>to 18 June 2008 | For marine jetty works<br>including concrete pump<br>derrick barges, hand-held<br>grinders, generators, air<br>compressors, boring<br>machines, water pumps,<br>tug boat, grout mixers and<br>grout pumps   |
|                                   | GW-RW0094-08 | 1 March to 31<br>March 2008         | For marine dredging<br>operation including grab<br>dredger, tug boat, split<br>hopper barge and motor<br>sampan   |
|                                   | GW-RW0312-08 | 04 July 2008 to 22<br>December 2008 | For marine jetty works<br>including concrete pump<br>derrick barges, hand-held<br>grinders, generators, air<br>compressors, boring<br>machines, water pumps,<br>tug boat, grout mixers and<br>grout pumps   |
|                                   | GW-RW0313-08 | 04 July 2008 to 19<br>December 2008 | For land-based works<br>including air compressors,<br>breakers, excavators,<br>wheeled loaders, mobile<br>cranes, concrete lorry<br>mixers, hand-held pokers,<br>bar benders/cutters, wood<br>saws, grinders, submarine<br>water pump, lorries with<br>crane, dump trucks,<br>rollers, ventilation fans<br>and generators   |
|                                   | GW-RW0373-08 | 1 August 2008 to<br>20 January 2009 | For land-based works<br>including air compressors,<br>breakers, excavators,<br>wheeled loaders, mobile<br>cranes, concrete lorry<br>mixers, hand-held pokers,<br>bar benders/cutters, wood<br>saws, grinders, submarine<br>water pump, lorries with<br>crane, dump trucks,<br>rollers, ventilation fans,<br>generators, stirrer, jet<br>chisel, water jet machine<br>and dehumidifier |
|                                   | GW-RW0368-08 | 1 September to 30<br>November 2008  | For marine dredging<br>operation including grab<br>dredger, tug boat, split<br>hopper barge and motor<br>sampan   |

| Permit/ Licenses/<br>Notification | Reference    | Validity Period                            | Remarks   |
|-----------------------------------|--------------|--|---|
|                                   | GW-RW0054-09 | 16 February 2009<br>to 5 August 2009       | For land-based and marine<br>works including passenger<br>launch, winch, welding<br>machine, grinder,<br>generator, power pack, tug<br>boat, crane, air<br>compressor, roller, hoist<br>and derrick barge   |
|                                   | GW-RW0261-09 | 3 July 2009 to 3<br>November 2009          | For land-based and marine<br>works including derrick<br>barge, grinder, crane, tug<br>boat, drill, welding<br>machine, hopper barge,<br>motor sampan, air<br>compressor   |
|                                   | GW-RW0299-09 | 21 July 2009 to 20<br>January 2010         | For land-based works<br>including air compressors,<br>breakers, excavators,<br>wheeled loaders, mobile<br>cranes, concrete lorry<br>mixers, hand-held pokers,<br>bar benders/cutters, wood<br>saws, grinders, submarine<br>water pump, lorries with<br>crane, dump trucks,<br>rollers, ventilation fans,<br>generators, stirrer, jet<br>chisel, water jet machine<br>and dehumidifier etc |
|                                   | GW-RW0459-09 | 26 October 2009<br>to 28 February<br>2010  | For marine dredging<br>operation including air<br>compressors, derrick<br>barge, tug boat, mobile<br>crane, hand-held grinder,<br>generator, hand-held drill,<br>winch, welding machine,<br>motor sampan, grab<br>dredger hopper barge etc  |
| Marine Dumping<br>Permit          | EP/MD/08-064 | 13 December 2007<br>to 29 February<br>2008 | For Type 1 – Open Sea<br>Disposal   |
|                                   | EP/MD/08-065 | 13 December 2007<br>to 12 January<br>2008  | For Type 1d & Type 2<br>marine disposal   |
|                                   | EP/MD/08-071 | 13 January 2008<br>to 12 February<br>2008  | For Type 1d & Type 2<br>marine disposal   |
|                                   | EP/MD/08-090 | 3 March to 31<br>March 2008                | For Type 1d & Type 2<br>marine disposal   |
|                                   | EP/MD/08-091 | 3 March to 31<br>March 2008                | For Type 1 – Open Sea<br>Disposal   |
|                                   | EP/MD/09-018 | 1 September to 30<br>September 2008        | For Type 1d & Type 2<br>marine disposal   |

| Permit/ Licenses/<br>Notification | Reference          | Validity Period                          | Remarks                                 |
|-----------------------------------|--------------------|--|---|
|                                   | EP/MD/09-032       | 1 October to 31<br>October 2008          | For Type 1d & Type 2<br>marine disposal |
|                                   | EP/MD/09-017       | 1 September to 30<br>November 2008       | For Type 1 – Open Sea<br>Disposal       |
|                                   | EP/MD/09-039       | 1 December 2008<br>to 31 January<br>2009 | For Type 1 – Open Sea<br>Disposal       |
| Wastewater Discharge<br>License   | EP760/421/011399/l | 15 March 2006 to<br>31 March 2011        | Issued on 15 March 2006                 |

#### 2.6 COMMUNITY LIAISON GROUP MEETING

According to the EP requirements, a Community Liaison Group (CLG) was established within three months of commencement of construction of the Project. The major duty of the CLG is to advise on and monitor the proper design, construction and operation of the Project. The CLG comprises representatives from Airport Authority, members of Tuen Mun community and academics. During the reporting period, no meetings were organised by the CLG. The details of the CLG (including Membership and its Terms of Reference) and the minutes of previous meetings can be found on the Project website (<u>http://www.paffhk.com</u>).

# 2.7 SUMMARY OF NON-COMPLIANCE WITH THE ENVIRONMENTAL QUALITY PERFORMANCE LIMITS

No environmental non-compliance was found during the reporting period.

#### 2.8 SUMMARY OF ENVIRONMENTAL COMPLAINTS

No environmental complaints were received during the reporting period. A summary of environmental complaints since project commencement is presented in *Annex C*.

#### 2.9 SUMMARY OF ENVIRONMENTAL SUMMONS

No summons was received in this reporting period. A summary of legal proceeding since project commencement is presented in *Annex C*.

#### 3 ENVIRONMENTAL ISSUES AND ACTIONS

#### 3.1 PREVIOUS ENVIRONMENTAL DEFICIENCIES AND FOLLOW-UP ACTIONS

As no environmental complaints were received over the last reporting period, no follow-up actions were required.

Site inspections were carried out by the ET on 7, 14, 21 and 28 October 2009. Overall, the site was in good orderly manner and no non-compliance was found. Environmental deficiencies and follow-up actions/mitigation measures were identified during the inspections, as follows:

#### Air Quality

- On 7 October, the Contractor was reminded to regularly water the unpaved areas to avoid dust generation.
- On 21 October, black smoke was seen being emitted from a barge sitting offshore of the jetty area. The contractor was advised to inspect/service the engine as soon as possible.

#### Water Quality

- On 7 October, exposed slope surfaces at excavation site near the main entrance were not sufficiently covered. The Contractor was reminded to cover the exposed surfaces by tarpaulin or planting vegetation to avoid dust generation.
- On 7 October, water was seen leaking from Tank 11. The Contractor was reminded to ensure the water drained adequately and was not left to accumulate in stagnant pools.
- On 14 October, a stagnant pool of water was observed underneath the dehumidifier leading into Tank 8 and the hose leading from the dripping pipe was not leading to a drain. The Contractor was advised to fill in the stagnant water pool and ensure the hose from the pipe lead to a drain and.
- On 14 October, mosquito larvae were observed in the sediment tanks near the middle, main entrance. The Contractor was advised to cover the sediment tanks as soon as possible.
- On 14 October, the sea water near the jetty area was turbid. This maybe due to sediment disturbance from the propeller of the barge operating in this shallow area. Since the operation was temporary and the disturbance was localised, hence no remedial action was advised.
- On 21 and 28 October, water was observed in the bunding around the

diesel tank and generator respectively in the Workshop area. The Contractor was advised to clear this immediately.

• On 28 October, cleaning of Tank 11 was causing water to collect at its base. The Contractor was advised to clear/backfill the water as soon as the cleaning was completed.

## Waste/Chemical Management

- On 7 and 21 October, the paper recycling bin near the main office area was starting to overflow. The Contractor was advised to empty the bin as soon as possible and on 14 October was reminded to put the spare, new recycling bins out around the site.
- On 14 October. the labels on the drums in the chemical waste storage area were observed to be damaged or absent. The Contractor was advised to renew the labels.
- On 14 October, painting material without proper receptacles was found near the sediment tank near the middle main entrance. The Contractor was advised to clear this into the chemical waste storage area as soon as possible.
- On 21 and 28 October, scattered pieces of debris were found around the Tank Farm and Jetty areas. The Contractor was advised to collect all debris and dispose of it appropriately.
- On 21 and 28 October, black plastic bags and hosepipes were found deposited in the chemical waster storage area by Tank 10. The Contractor was advised to clear these to the appropriate place as soon as possible.
- On 21 October, no fire extinguisher was found next to the generator by Tank 10. The Contractor was reminded to put a fire extinguisher next to the generator as soon as possible.

With the exception of the above observations, the site was in a good orderly manner. The ET will keep track on the EM&A programme to ensure compliance of environmental requirements and the proper implementation of all necessary mitigation measures.

# 3.2 IMPLEMENTATION STATUS ON ENVIRONMENTAL PROTECTION REQUIREMENTS

The implementation status of environmental mitigation measures and requirements as stated in the *EIA Report, Environmental Permits* and *EM&A Manual* during the reporting period is summarized in *Annex D*.

#### 4 ENVIRONMENTAL MONITORING

#### 4.1 AIR AND NOISE

Air and Noise monitoring is not required for the project.

#### 4.2 WATER QUALITY

No dredging activities were undertaken during the reporting period. Water quality monitoring was therefore not required for the reporting month.

#### 4.3 POPs MONITORING

Persistent organic pollutants (POPs) monitoring was not required since there was no dredging operation during the reporting month.

#### 4.4 WASTE MANAGEMENT

According to EP *Condition 3.3,* the Contractor's revised Waste Management Plan (Revision 5) (WMP), which has been certified by the ET and IEC, was submitted to the EPD on 5 November 2008.

#### 4.5 CULTURAL HERITAGE

The *Watching Brief Report*, verified by the Independent Environmental Checker, was submitted to the EPD and AMO on 9 May 2008.

#### 4.6 LANDSCAPE AND VISUAL

According to the *EIA report* and *EM&A Manual*, mitigation measures and site inspection are required during the landscaping/planting works. The berm/landscaping bund was habilitated by vegetation which was grown during the project suspension period.

The weekly site inspections included general audits on landscape and visual issues to ensure that the site was in an orderly and acceptable manner.

#### 4.7 LAND CONTAMINATION, HAZARD TO LIFE AND FUEL SPILL RISK

The ET and IEC verified updated design audit plan was submitted to the EPD on 7 November 2007.

Weekly site inspection covered the waste management aspects which included measures to prevent land contamination by chemical wastes.

#### 4.8 ECOLOGY

#### Dolphin Visual Monitoring

Dolphin visual monitoring was not required as no dredging works were scheduled for the reporting period.

#### 4.9 EM&A MANUAL

The *EM&A Manual* for the Project has been updated by the ET to include the detailed arrangements of setting up a CLG, carrying out design audit, and monitoring of Persistent Organic Pollutants during the dredging phase of construction of the Project. The revised *EM&A Manual*, which has been verified by the IEC, was submitted to the EPD on 1 April 2009.

#### 4.10 BASELINE WATER QUALITY MONITORING

The *Final Baseline Monitoring Report* was submitted to the EPD on 20 February 2008 and placed under the EIAO register.

#### 5 FUTURE KEY ISSUES

#### 5.1 KEY ISSUES FOR THE NEXT MONTH

Key issue to be considered in the next month will be:

- dust release and suppression;
- backfilling of rock armour over pipeline; and,
- dredging operation for the repair of pipeline.

#### 5.2 IMPACT PREDICTION FOR THE NEXT MONTH

Provided that environmental mitigation measures including good on-site practises are properly implemented, it is not expected that unacceptable adverse impacts will arise.

#### 5.3 WORKS AND MONITORING SCHEDULE FOR THE NEXT MONTH


Work programme for the next month includes:

- backfilling and placing of rock armour works;
- dredging operation for the repair of pipeline;
- riser connections at Sha Chau;
- jetty platform works (non-piling);
- site works (construction works for tank farm, roof truss, drainages, bund wall, security wall and emergency vehicle access road etc); and,
- pre-commission and commissioning activities for Phase 1A (the first four tanks).

Weekly site inspections will be undertaken.


Annex A


Project Location

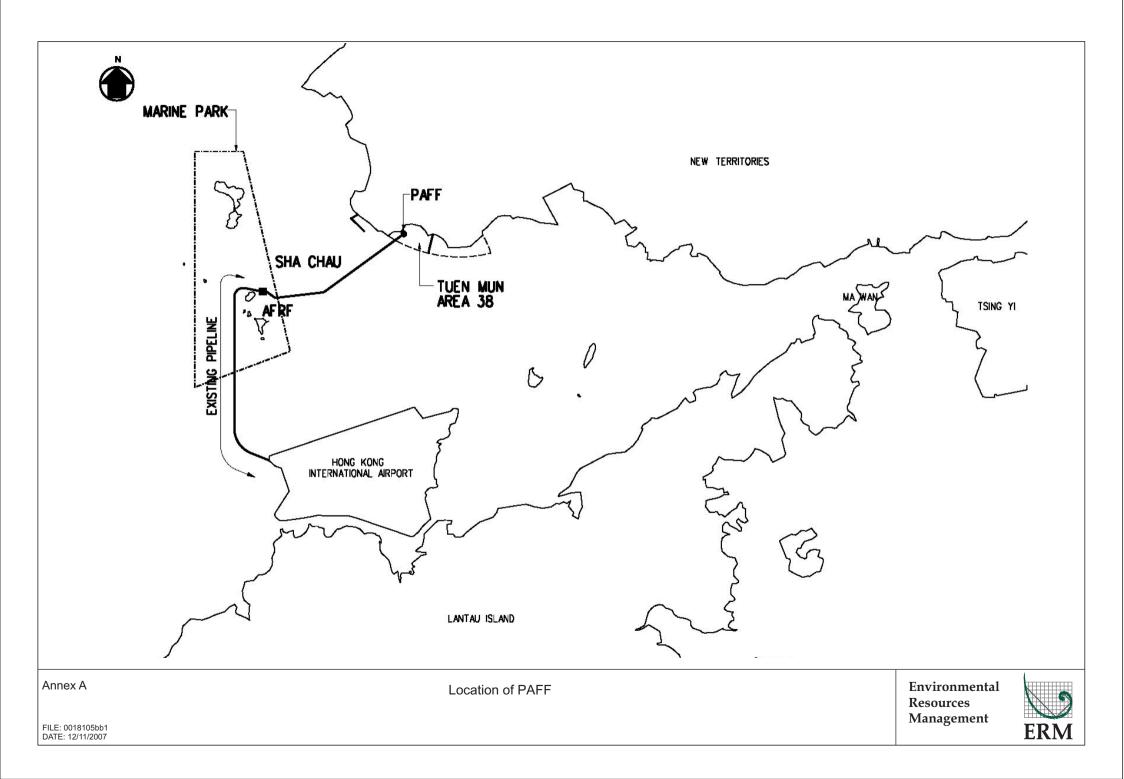

Annex B

Water Quality and Ecological Sensitive Receivers

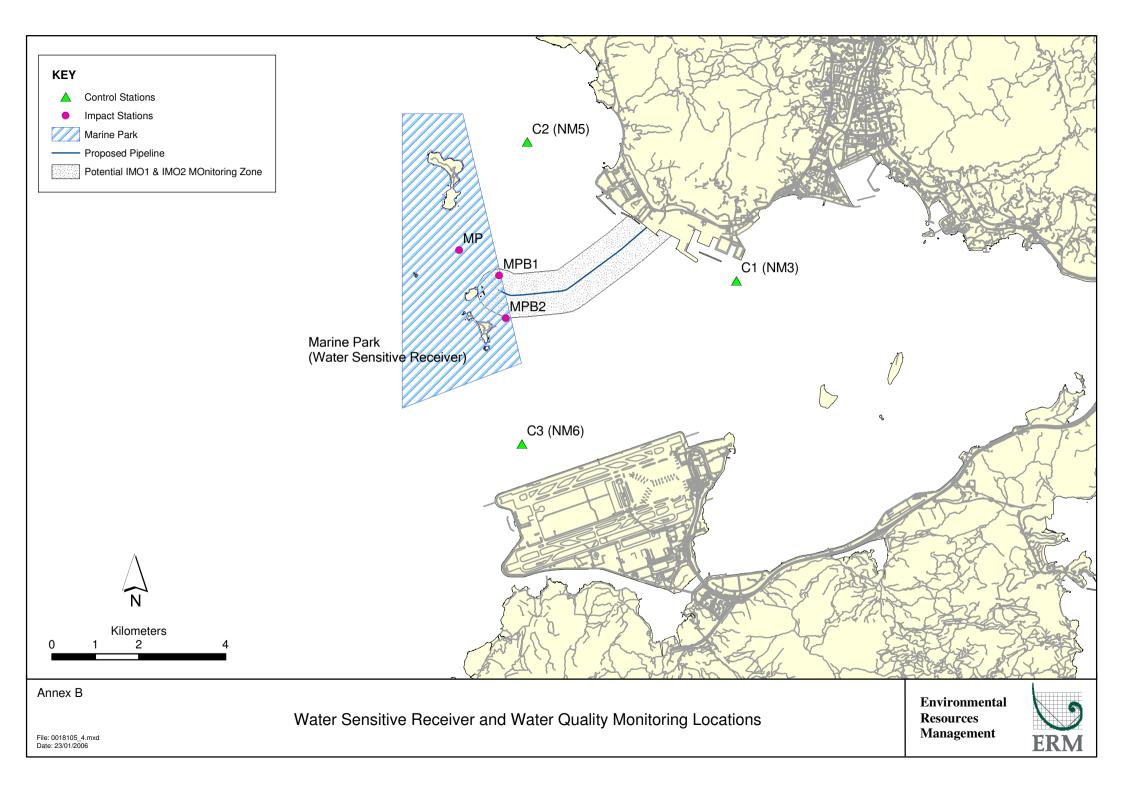

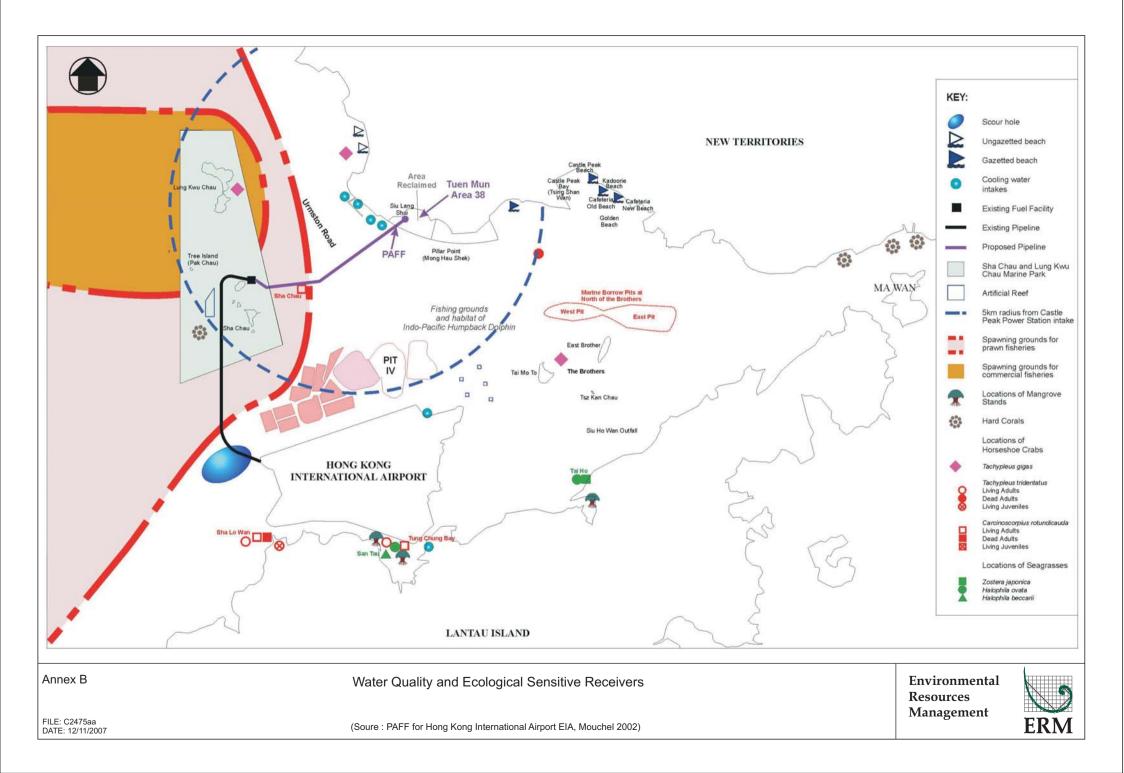

Annex C

Cumulative Complaints Statistics

| <b>Reporting Period</b> |           | Complaint Statistics |                  |
|-------------------------|-----------|----------------------|------------------|
| _                       | Frequency | Cumulative           | Complaint Nature |
| Before construction     | 1         | 1                    | Dust             |
| works                   |           |                      |                  |
| 18/11/05 - 15/12/05     | 1         | 2                    | Dust             |
| 15/12/05 - 14/01/06     | 0         | 2                    | Nil              |
| 15/01/06 - 14/02/06     | 0         | 2                    | Nil              |
| 15/02/06 - 14/03/06     | 0         | 2                    | Nil              |
| 15/03/06 - 14/04/06     | 0         | 2                    | Nil              |
| 15/04/06 - 14/05/06     | 0         | 2                    | Nil              |
| 15/05/06 - 14/06/06     | 0         | 2                    | Nil              |
| 15/06/06 - 14/07/06     | 0         | 2                    | Nil              |

# Summary of Environmental Complaints

Re-commencement of construction works on 9th July 2007

| 09/07/07 - 31/07/07 | 0 | 2 | Nil |
|---------------------|---|---|-----|
| 01/08/07 - 31/08/07 | 0 | 2 | Nil |
| 01/09/07 - 30/09/07 | 0 | 2 | Nil |
| 01/10/07 - 31/10/07 | 0 | 2 | Nil |
| 01/11/07 - 30/11/07 | 0 | 2 | Nil |
| 01/12/07 - 31/12/07 | 0 | 2 | Nil |
| 01/01/08 - 31/01/08 | 0 | 2 | Nil |
| 01/02/08 - 29/02/08 | 0 | 2 | Nil |
| 01/03/08 - 31/03/08 | 0 | 2 | Nil |
| 01/04/08 - 30/04/08 | 0 | 2 | Nil |
| 01/05/08 - 31/05/08 | 0 | 2 | Nil |
| 01/06/08 - 30/06/08 | 0 | 2 | Nil |
| 01/07/08 - 31/07/08 | 0 | 2 | Nil |
| 01/08/08 - 31/08/08 | 0 | 2 | Nil |
| 01/09/08 - 30/09/08 | 0 | 2 | Nil |
| 01/10/08 - 31/10/08 | 0 | 2 | Nil |
| 01/11/08 - 30/11/08 | 0 | 2 | Nil |
| 01/12/08 - 31/12/08 | 0 | 2 | Nil |
| 01/01/09 - 31/01/09 | 0 | 2 | Nil |
| 01/02/09 - 28/02/09 | 0 | 2 | Nil |
| 01/03/09 - 31/03/09 | 0 | 2 | Nil |
| 01/04/09 - 30/04/09 | 0 | 2 | Nil |
| 01/05/09 - 31/05/09 | 0 | 2 | Nil |
| 01/06/09 - 30/06/09 | 0 | 2 | Nil |
| 01/07/09 - 31/07/09 | 0 | 2 | Nil |
| 01/08/09 - 31/08/09 | 0 | 2 | Nil |
| 01/09/09 - 30/09/09 | 0 | 2 | Nil |
| 01/10/09 - 31/10/09 | 0 | 2 | Nil |
|                     |   |   |     |

# Summary of Environmental Summons

| <b>Reporting Period</b> | ]         | Environmental Summo | ns            |
|-------------------------|-----------|---------------------|---------------|
|                         | Frequency | Cumulative          | Summon Nature |
| 18/11/05 - 15/12/05     | 0         | 0                   | Nil           |
| 16/12/05 - 14/01/06     | 0         | 0                   | Nil           |
| 15/01/06 - 14/02/06     | 0         | 0                   | Nil           |
| 15/02/06 - 14/03/06     | 0         | 0                   | Nil           |
| 15/03/06 - 14/04/06     | 0         | 0                   | Nil           |
| 15/04/06 - 14/05/06     | 0         | 0                   | Nil           |
| 15/05/06 - 14/06/06     | 0         | 0                   | Nil           |
| 15/06/06 - 14/07/06     | 0         | 0                   | Nil           |

Re-commencement of construction works on 9th July 2007

| 09/07/07 - 31/07/07 | 0 | 0 | Nil |
|---------------------|---|---|-----|
| 01/08/07 - 31/08/07 | 0 | 0 | Nil |
| 01/09/07 - 30/09/07 | 0 | 0 | Nil |
| 01/10/07 - 31/10/07 | 0 | 0 | Nil |
| 01/11/07 - 30/11/07 | 0 | 0 | Nil |
| 01/12/07 - 31/12/07 | 0 | 0 | Nil |
| 01/01/08 - 31/01/08 | 0 | 0 | Nil |
| 01/02/08 - 29/02/08 | 0 | 0 | Nil |
| 01/03/08 - 31/03/08 | 0 | 0 | Nil |
| 01/04/08 - 30/04/08 | 0 | 0 | Nil |
| 01/05/08 - 31/05/08 | 0 | 0 | Nil |
| 01/06/08 - 30/06/08 | 0 | 0 | Nil |
| 01/07/08 - 31/07/08 | 0 | 0 | Nil |
| 01/08/08 - 31/08/08 | 0 | 0 | Nil |
| 01/09/08 - 30/09/08 | 0 | 0 | Nil |
| 01/10/08 - 31/10/08 | 0 | 0 | Nil |
| 01/11/08 - 30/11/08 | 0 | 0 | Nil |
| 01/12/08 - 31/12/08 | 0 | 0 | Nil |
| 01/01/09 - 31/01/09 | 0 | 0 | Nil |
| 01/02/09 - 28/02/09 | 0 | 0 | Nil |
| 01/03/09 - 31/03/09 | 0 | 0 | Nil |
| 01/04/09 - 30/04/09 | 0 | 0 | Nil |
| 01/05/09 - 31/05/09 | 0 | 0 | Nil |
| 01/06/09 - 30/06/09 | 0 | 0 | Nil |
| 01/07/09 - 31/07/09 | 0 | 0 | Nil |
| 01/08/09 - 31/08/09 | 0 | 0 | Nil |
| 01/09/09 - 30/09/09 | 0 | 0 | Nil |
| 01/10/09 - 31/10/09 | 0 | 0 | Nil |

Annex D

Implementation Programme of Mitigation Measures

| EIA<br>Reference | EM&A<br>Manual<br>Reference | Environmental Protection Measures  | Location/<br>Timing                       | Implementation<br>Agent | Relevant<br>Standard or<br>Requirement                                     | Im<br>D | plementation<br>Schedule<br>C O | Maintenance<br>Agency | Implementation<br>Status |
|------------------|-----------------------------|--|---|-------------------------|--|---------|---------------------------------|-----------------------|--------------------------|
| Water Qua        | lity                        |  |   |                         |  |         |                                 |                       |                          |
| 6.7              | 6.8.1                       | There should be no access to the shore or<br>working from land within the Marine<br>Park. No marine anchors shall be used<br>within the Marine Park. | Marine Park /<br>Pipeline<br>Dredging     | Contractor              | TMEIA  |         | Υ                               | N/A                   | Complete                 |
| 6.7              | 6.8.1                       | No hydraulic dredging within Marine<br>Park.   | Marine Park /<br>Pipeline<br>Dredging     | Contractor              | TMEIA  |         | Y                               | N/A                   | Completed                |
| 6.7              | 6.8.1                       | Dredging for pipeline trench should be<br>timed to coincide with maintenance<br>dredging for Sha Chau AFRF marine<br>access channel if relevant.     | Sha Chau ARFR<br>Marine access<br>channel | Airport<br>Authority    | TMEIA  |         | Y                               | N/A                   | Completed                |
| 6.4              |                             | The work rate for dredging should not exceed 4,000 m <sup>3</sup> /hr for the TSHD and 7,000 m <sup>3</sup> /day for the grab dredger.               | Marine Park /<br>Pipeline<br>Dredging     | Contractor              | TMEIA  |         | Y                               | N/A                   | Completed                |
| 6.7              | 6.8.1                       | Standard good dredging practice<br>measures shall be written in the<br>dredging contract.  | Marine Park /<br>Pipeline<br>Dredging     | Franchisee              | TMEIA  |         | Y                               | N/A                   | Completed                |
| 6.7              | 6.8.1                       | Use of Lean Material Overboard (LMOB) systems shall be prohibited. No mud overflow is to be permitted for dredging using TSHD.                       | Dredged areas/<br>Pipeline<br>Dredging    | Contractor              | TMEIA Marine<br>Fill Committee<br>Guidelines.<br>DASO permit<br>conditions |         | Y                               | N/A                   | Not applicable           |
| 6.7              | 6.8.1                       | Mechanical grabs shall be designed and<br>maintained to avoid spillage and should<br>seal tightly while being lifted.                                | Dredged areas/<br>Pipeline<br>Dredging    | Contractor              | TMEIA Marine<br>Fill Committee<br>Guidelines.<br>DASO permit<br>conditions |         | Y                               | N/A                   | Completed                |
| 6.7              | 6.8.1                       | Barges and hopper dredgers shall have<br>tight fittings seals to their bottom<br>openings to prevent leakage of material.                            | Dredged areas/<br>Pipeline<br>Dredging    | Contractor              | TMEIA Marine<br>Fill Committee<br>Guidelines.<br>DASO permit<br>conditions |         | Y                               | N/A                   | Completed                |

## ANNEX D IMPLEMENTATION SCHEDULE

| EIA<br>Reference | EM&A<br>Manual<br>Reference | Environmental Protection Measures  | Location/<br>Timing                    | Implementation<br>Agent | Relevant<br>Standard or<br>Requirement                                     | In<br>D | nplementation<br>Schedule<br>C O | Maintenance<br>Agency | Implementation<br>Status |
|------------------|-----------------------------|--|--|-------------------------|--|---------|----------------------------------|-----------------------|--------------------------|
| 6.7              | 6.8.1                       | Any pipe leakages shall be repaired<br>quickly. Plant should not be operated<br>with leaking pipes   | Dredged areas/<br>Pipeline<br>Dredging | Contractor              | TMEIA Marine<br>Fill Committee<br>Guidelines.<br>DASO permit<br>conditions |         | Ŷ                                | N/A                   | Not applicable           |
| 6.7              | 6.8.1                       | Loading of barges and hoppers shall be<br>controlled to prevent splashing of<br>dredged material to the surrounding<br>water. Barges or hoppers shall not be<br>filled to a level which will cause<br>overflow of materials or pollution of<br>water during loading or transportation. | Dredged areas/<br>Pipeline<br>Dredging | Contractor              | TMEIA Marine<br>Fill Committee<br>Guidelines.<br>DASO permit<br>conditions |         | Υ                                | N/A                   | Completed                |
| 6.7              | 6.8.1                       | Excess material shall be cleaned from the decks and exposed fittings of barges and hopper dredgers before the vessel is moved.   | Dredged areas/<br>Pipeline<br>Dredging | Contractor              | TMEIA Marine<br>Fill Committee<br>Guidelines.<br>DASO permit<br>conditions |         | Y                                | N/A                   | Completed                |
| 6.7              | 6.8.1                       | Adequate freeboard shall be maintained<br>on barges to reduce the likelihood of<br>decks being washed by wave action.  | Dredged areas/<br>Pipeline<br>Dredging | Contractor              | TMEIA Marine<br>Fill Committee<br>Guidelines.<br>DASO permit<br>conditions |         | Y                                | N/A                   | Completed                |
| 6.7              | 6.8.1                       | All vessels shall be sized such that<br>adequate clearance is maintained<br>between vessels and the sea bed at all<br>states of the tide to ensure that undue<br>turbidity is not generated by turbulence<br>from vessel movement or propeller<br>wash.                                | Dredged areas/<br>Pipeline<br>Dredging | Contractor              | TMEIA Marine<br>Fill Committee<br>Guidelines.<br>DASO permit<br>conditions |         | Y                                | N/A                   | Completed                |
| 6.7              | 6.8.1                       | The works shall not cause foam, oil,<br>grease, letter or other objectionable<br>matter to be present in the water within<br>and adjacent to the works site.   | Dredged areas/<br>Pipeline<br>Dredging | Contractor              | TMEIA Marine<br>Fill Committee<br>Guidelines.<br>DASO permit<br>conditions |         | Y                                | N/A                   | Completed                |

| EIA<br>Reference | EM&A<br>Manual | Environmental Protection Measures  | Location /<br>Timing                               | Implementation<br>Agent | Relevant<br>Standard or  |   | plementati<br>Schedule | Agency | e Implementation<br>Status |
|------------------|----------------|--|--|-------------------------|--|---|------------------------|--------|----------------------------|
|                  | Reference      |  |  |                         | Requirement  | D |                        | )      |                            |
| 6.7              | 6.8.1          | Placement of pipeline trench backfill<br>should be undertaken in a controlled<br>manner to minimise impacts.<br>Backfilling with rock should be<br>undertaken either down pipe or by a<br>reverse grab operation or other<br>controlled technique to ensure that this<br>material does not mound on the seabed   | Pipeline<br>trench/<br>Pipeline<br>Dredging        | Contractor              | TMEIA<br>Minimise<br>disturbance                                   |   | Y                      | N/A    | Ongoing                    |
| 6.7              | 6.8.1          | Wastewater from temporary site facilities<br>should be controlled to prevent direct<br>discharge to surface or marine waters.  | Land site/<br>Throughout<br>construction<br>period | Contractor              | TMEIA<br>ProPECC Note<br>1/94. WPCO<br>TM on Effluent<br>Standards |   | Y                      | N/A    | Ongoing                    |
| 6.7              | 6.8.1          | Sewage effluent and discharges from on-<br>site kitchen facilities shall be directed to<br>Government sewer in accordance with<br>the requirements of the WPCO or<br>collected for disposal offsite. The use of<br>soakaways shall be avoided.   | Land site/<br>Throughout<br>construction<br>period | Contractor              | TMEIA<br>ProPECC Note<br>1/94. WPCO<br>TM on Effluent<br>Standards |   | Y                      | N/A    | Ongoing                    |
| 6.7              | 6.8.1          | Storm drainage should be directed to<br>storm drains via adequately designed<br>sand/silt removal facilities such as sand<br>traps, silt traps and sediment basins.<br>Channels, earth bunds or sandbag<br>barriers should be provided on site to<br>properly direct stormwater to such silt<br>removal facilities. Catchpits and<br>perimeter channels should be<br>constructed in advance of site formation<br>works and earthworks. | Land site/<br>Throughout<br>construction<br>period | Contractor              | TMEIA<br>ProPECC Note<br>1/94. WPCO<br>TM on Effluent<br>Standards |   | Υ                      | N/A    | Ongoing                    |
| 6.7              | 6.8.1          | Silt removal facilities, channels and<br>manholes shall be maintained and any<br>deposited silt and grit shall be removed<br>regularly, including specifically at the<br>onset of and after each rainstorm.  | Land site/<br>Throughout<br>construction<br>period | Contractor              | TMEIA<br>ProPECC Note<br>1/94. WPCO<br>TM on Effluent<br>Standards |   | Y                      | N/A    | Ongoing                    |

| EIA       | EM&A      | <b>Environmental Protection Measures</b>  | Location /  | Implementation | Relevant       | In | npleme |         |        | Implementation |
|-----------|-----------|---|---|----------------|----------------|----|--------|---------|--------|----------------|
| Reference | Manual    |   | Timing  | Agent          | Standard or    |    | Sched  |         | Agency | Status         |
|           | Reference |   |   |                | Requirement    | D  | С      | 0       |        |                |
| 6.7       | 6.8.1     | Temporary access roads should be  | Land site/  | Contractor     | TMEIA          |    | Y      |         | N/A    | Ongoing        |
|           |           | surfaced with crushed stone or gravel.  | Throughout  |                | ProPECC Note   |    |        |         |        |                |
|           |           |   | construction  |                | 1/94. WPCO     |    |        |         |        |                |
|           |           |   | period  |                | TM on Effluent |    |        |         |        |                |
|           |           |   |   |                | Standards      |    |        |         |        |                |
| 6.7       | 6.8.1     | Rainwater pumped out from trenches or   | Land site/  | Contractor     | TMEIA          |    | Y      |         | N/A    | Ongoing        |
|           |           | foundation excavations should be  | Throughout  |                | ProPECC Note   |    |        |         |        |                |
|           |           | discharged into storm drains via silt   | construction  |                | 1/94. WPCO     |    |        |         |        |                |
|           |           | removal facilities.   | period  |                | TM on Effluent |    |        |         |        |                |
|           |           |   |   |                | Standards      |    |        |         |        |                |
| 6.7       | 6.8.1     | Measures should be taken to prevent the   | Land site/  | Contractor     | TMEIA          |    | Y      |         | N/A    | Ongoing        |
|           |           | washout of construction materials, soil,  | Throughout  |                | ProPECC Note   |    |        |         |        |                |
|           |           | silt or debris into any drainage system.  | construction  |                | 1/94. WPCO     |    |        |         |        |                |
|           |           |   | period  |                | TM on Effluent |    |        |         |        |                |
|           |           |   |   |                | Standards      |    |        |         |        |                |
| 6.7       | 6.8.1     | .8.1 Open stockpiles of construction materials (e.g. aggregates and sand) onsite should | Open stockpiles of construction materials Land site/ Contractor TMEIA |                | Y              |    | N/A    | Ongoing |        |                |
|           |           |   | Throughout<br>construction<br>period                                  |                | ProPECC Note   |    |        |         |        |                |
|           |           | be covered with tarpaulin or similar  |   | tion           | 1/94. WPCO     |    |        |         |        |                |
|           |           | fabric during rainstorms.   |   |                | TM on Effluent |    |        |         |        |                |
|           |           |   |   |                | Standards      |    |        |         |        |                |
| 6.7       | 6.8.1     | Manholes (including any newly   | Land site/  | Contractor     | TMEIA          |    | Y      |         | N/A    | Ongoing        |
|           |           | constructed ones) should always be  | Throughout  |                | ProPECC Note   |    |        |         |        |                |
|           |           | adequately covered and temporarily  | construction  |                | 1/94. WPCO     |    |        |         |        |                |
|           |           | sealed so as to prevent silt, construction  | period  |                | TM on Effluent |    |        |         |        |                |
|           |           | materials or debris from getting into the   |   |                | Standards      |    |        |         |        |                |
|           |           | drainage system, and to prevent storm   |   |                |                |    |        |         |        |                |
|           |           | run-off from getting into foul sewers.  |   |                |                |    |        |         |        |                |
| 6.7       | 6.8.1     | Discharges of surface run-off into foul   | Land site/  | Contractor     | TMEIA          |    | Y      |         | N/A    | Ongoing        |
|           |           | sewers must always be prevented in  | Throughout  |                | ProPECC Note   |    |        |         |        |                |
|           |           | order not to unduly overload the foul   | construction  |                | 1/94. WPCO     |    |        |         |        |                |
|           |           | sewerage system.  | period  |                | TM on Effluent |    |        |         |        |                |
|           |           |   | -   |                | Standards      |    |        |         |        |                |

| EIA<br>Reference | EM&A<br>Manual      | Environmental Protection Measures  | Location /<br>Timing                               | Implementation<br>Agent | Relevant<br>Standard or  |   | plementation<br>Schedule | Maintenance<br>Agency | Implementation<br>Status |
|------------------|---------------------|--|--|-------------------------|--|---|--------------------------|-----------------------|--------------------------|
| 6.7              | Reference     6.8.1 | All vehicles and plant should be cleaned<br>before they leave the construction site to<br>ensure that no earth, mud or debris is<br>deposited by them on roads. A wheel<br>washing bay should be provided at   | Land site/<br>Throughout<br>construction<br>period | Contractor              | RequirementTMEIAProPECC Note1/94. WPCOTM on EffluentStandards      | D | <u>С</u> 0<br>Ү          | N/A                   | Ongoing                  |
| 6.7              | 6.8.1               | every site exit.<br>Wheel wash overflow shall be directed to<br>silt removal facilities before being<br>discharged to the storm drain.   | Land site/<br>Throughout<br>construction<br>period | Contractor              | TMEIA<br>ProPECC Note<br>1/94. WPCO<br>TM on Effluent<br>Standards |   | Y                        | N/A                   | Ongoing                  |
| 6.7              | 6.8.1               | The section of construction road between<br>the wheel washing bay and the public<br>road should be surfaced with crushed<br>stone or coarse gravel.  | Land site/<br>Throughout<br>construction<br>period | Contractor              | TMEIA<br>ProPECC Note<br>1/94. WPCO<br>TM on Effluent<br>Standards |   | Y                        | N/A                   | Ongoing                  |
| 6.7              | 6.8.1               | Wastewater generated from concreting,<br>plastering, internal decoration, cleaning<br>work and other similar activities, shall be<br>screened to remove large objects.   | Land site/<br>Throughout<br>construction<br>period | Contractor              | TMEIA<br>ProPECC Note<br>1/94. WPCO<br>TM on Effluent<br>Standards |   | Y                        | N/A                   | Ongoing                  |
| 6.7              | 6.8.1               | Vehicle and plant servicing areas, vehicle<br>wash bays and lubrication facilities shall<br>be located under roofed areas. The<br>drainage in these covered areas shall be<br>connected to foul sewers via a petrol<br>interceptor in accordance with the<br>requirements of the WPCO or collected<br>for off site disposal. | Land site/<br>Throughout<br>construction<br>period | Contractor              | TMEIA<br>ProPECC Note<br>1/94. WPCO<br>TM on Effluent<br>Standards |   | Y                        | N/A                   | Ongoing                  |
| 6.7              | 6.8.1               | The contractors shall prepare<br>oil/chemical cleanup plan and ensure<br>that leakages or spillages are contained<br>and cleaned up immediately.   | Land site/<br>Throughout<br>construction<br>period | Contractor              | TMEIA<br>ProPECC Note<br>1/94. WPCO<br>TM on Effluent<br>Standards |   | Y                        | N/A                   | Ongoing                  |

| EIA       | EM&A      | <b>Environmental Protection Measures</b>   | Location /                            | Implementation | Relevant         | In | nplement |   | Maintenance | Implementation |
|-----------|-----------|--|---------------------------------------|----------------|------------------|----|----------|---|-------------|----------------|
| Reference | Manual    |  | Timing                                | Agent          | Standard or      |    | Schedu   |   | Agency      | Status         |
|           | Reference |  |                                       |                | Requirement      | D  | С        | 0 |             |                |
| 6.7       | 6.8.1     | Waste oil should be collected and stored   | Land site/                            | Contractor     | TMEIA            |    | Y        |   | N/A         | Ongoing        |
|           |           | for recycling or disposal, in accordance   | Throughout                            |                | ProPECC Note     |    |          |   |             |                |
|           |           | with the Waste Disposal Ordinance.         | construction                          |                | 1/94. WPCO       |    |          |   |             |                |
|           |           |  | period                                |                | TM on Effluent   |    |          |   |             |                |
|           |           |  |                                       |                | Standards        |    |          |   |             |                |
| 6.7       | 6.8.1     | All fuel tanks and chemical storage areas  | Land site/                            | Contractor     | TMEIA            |    | Y        |   | N/A         | Ongoing        |
|           |           | should be provided with locks and be       | Throughout                            |                | ProPECC Note     |    |          |   |             |                |
|           |           | sited on sealed areas. The storage areas   | construction                          |                | 1/94. WPCO       |    |          |   |             |                |
|           |           | should be surrounded by bunds with a       | period                                |                | TM on Effluent   |    |          |   |             |                |
|           |           | capacity equal to 110% of the storage      | -                                     |                | Standards        |    |          |   |             |                |
|           |           | capacity of the largest tank.              |                                       |                |                  |    |          |   |             |                |
| 6.7       | 6.8.1     | Surface run-off from bunded areas          | Land site/                            | Contractor     | TMEIA            |    | Y        |   | N/A         | Ongoing        |
|           |           | should pass through oil/grease traps       | Throughout                            |                | ProPECC Note     |    |          |   |             | 0 0            |
|           |           | prior to discharge to the stormwater       | construction                          |                | 1/94. WPCO       |    |          |   |             |                |
|           |           | system.                                    | period                                |                | TM on Effluent   |    |          |   |             |                |
|           |           | 2  |                                       |                | Standards        |    |          |   |             |                |
| 6.7       | 6.8.1     | Wastewater from pipe commissioning         | Tank                                  | Franchisee     | TMEIA            |    | Y        |   | N/A         | Ongoing        |
|           |           | dewatering exercises shall be stored on    | Farm/Tank                             |                | WPCO TM on       |    |          |   |             | 0 0            |
|           |           | site and for chemical analysis and safe    | farm                                  |                | Effluent         |    |          |   |             |                |
|           |           | disposal in accordance with the WPCO.      | commissioning                         |                | Standards        |    |          |   |             |                |
| 6.7       | Section 6 | All construction works shall be subject to | Ŭ                                     | Contractor     | EM&A Manual      |    | Y        |   | N/A         | Ongoing        |
|           |           | routine audit to ensure implementation     | Throughout                            |                |                  |    |          |   | ,           | 0 0            |
|           |           | of all EIA recommendations and good        | construction                          |                |                  |    |          |   |             |                |
|           |           | working practice.                          | period                                |                |                  |    |          |   |             |                |
| 6.7       | Section 6 | Submarine section of aviation fuel         | Submarine                             | Franchisee     | TMEIA            | Ŷ  | Y        |   | Franchisee  | Ongoing        |
| •••       |           | pipeline shall be covered with rock        | pipeline                              |                | Rock armour to   | _  | _        |   |             |                |
|           |           | armour protection which shall not          | Pipeinie                              |                | minimum          |    |          |   |             |                |
|           |           | protrude above the level of the adjacent   |                                       |                | thickness of 1m  |    |          |   |             |                |
|           |           | natural seabed.                            |                                       |                | uncluicos or fin |    |          |   |             |                |
|           |           | hatarar scubed.                            |                                       |                |                  |    |          |   |             |                |
| 6.7       | Section 6 | Detailed emergency response procedures     | All facilities                        | Franchisee     | TMEIA            |    |          | Y | Franchisee  | Pending        |
|           | Section   | shall be drawn up. These will include      | · · · · · · · · · · · · · · · · · · · | - michildee    | Industry         |    |          | 1 | - runchibee |                |
|           |           | requirements to maintain floating oil      |                                       |                | Standards e.g.   |    |          |   |             |                |
|           |           | booms, absorbent materials and             |                                       |                | Oil Companies    |    |          |   |             |                |
|           |           | skimmers on site at all times.             |                                       |                | International    |    |          |   |             |                |
|           |           | skinniers on site at an unles.             |                                       |                | Marine Forum     |    |          |   |             |                |
|           |           |  |                                       |                | Marine Forum     |    |          |   |             |                |

| EIA       | EM&A                | Environmental Protection Measures   | Location / | Implementation | Relevant  | In |          |           | ation  | Maintenance | 1        |
|-----------|---------------------|---|------------|----------------|---|----|----------|-----------|--------|-------------|----------|
| Reference | Manual<br>Reference |   | Timing     | Agent          | Standard or<br>Requirement  | D  | Sch<br>( | edul<br>] | e<br>O | Agency      | Status   |
| 6.7       | Section 6           | Coupling points on the jetty will be<br>protected with slop collection utilities.   | Jetty      | Franchisee     | TMEIA<br>Rock armour to<br>minimum<br>thickness of 1m                                 |    |          | Y         |        | Franchisee  | On going |
| 6.7       | Section 6           | Auxiliary tanks shall be permanently maintained at the tank farm for recovered fuel and slops.  | Tank farm  | Franchisee     | TMEIA   |    |          |           | Y      | Franchisee  | Pending  |
| 6.7       | Section 6           | Oily drainage systems and slop<br>collection systems will connect to an<br>oil/water separator.   | Tank farm  | Franchisee     | TMEIA<br>Industry<br>Standards e.g.<br>Oil Companies<br>International<br>Marine Forum |    |          | Y         |        | Franchisee  | On going |
| 6.7       | Section 6           | All tanks shall be bunded to a capacity of<br>at least 150% of the largest individual<br>tank in each compound by 2040. Tank<br>pits shall be protected by an<br>impermeable bed (e.g. geotextile<br>sheeting) to prevent seepage of aviation<br>fuel to ground. A leak detection system<br>shall be installed beneath the<br>containment membrane. | Tank farm  | Franchisee     | TMEIA<br>Hong Kong<br>Code of Practice<br>for Oil<br>Installations,<br>1992           |    |          | Y         |        | Franchisee  | On going |
| 6.7       | Section 6           | There shall be no direct outlet from the<br>bund. A collection pump shall be<br>included in the base. Removal of<br>accumulated rainwater shall be activated<br>manually and discharged to storm drain<br>via an oil/water separator.   | Tank farm  | Franchisee     | TMEIA   |    |          | Y         |        | Franchisee  | On going |
| 6.7       | Section 6           | Contingency procedures shall be drawn<br>up to ensure containment and safe<br>disposal of any fuel lost from tanks or<br>pipework. Suitable absorbent materials<br>(e.g. sand or earth) shall be kept on site<br>to deal with spillages.  | Tank farm  | Franchisee     | TMEIA<br>Hong Kong<br>Code of Practice<br>for Oil<br>Installations,<br>1992           |    |          |           | Υ      | Franchisee  | Pending  |
| 6.7       | Section 6           | Valves shall be installed within the storm drainage system to facilitate the retention of spillages.  | Tank farm  | Franchisee     | TMEIA   |    |          | Y         |        | Franchisee  | On going |

| EIA<br>Reference | EM&A<br>Manual<br>Reference | Environmental Protection Measures  | Location/<br>Timing  | Implementation<br>Agent | Relevant<br>Standard or<br>Requirement | Im<br>D | - | entatio<br>dule | on<br>D  | Maintenance<br>Agency | Implementation<br>Status |
|------------------|-----------------------------|--|--|-------------------------|--|---------|---|-----------------|----------|-----------------------|--------------------------|
| 6.10             | Section 6                   | Water quality monitoring shall be<br>undertaken for suspended solids,<br>turbidity, and dissolved oxygen.  | Design<br>monitoring<br>stations as<br>defined in<br>EM&A Manual,<br>section 6.<br>Construction<br>period when<br>dredging takes<br>place within<br>1000m of<br>Marine Park<br>and along entire<br>length of the<br>pipeline | Contractor              | EM&A Manual                            |         | Ŷ |                 | <u> </u> | N/A                   | Completed                |
| 6.10             | Section 6                   | Routine water quality monitoring in the<br>vicinity of the PAFF site to check the<br>effectiveness of the proposed<br>precautionary measures implemented<br>for on-site spill control. The details of<br>the monitoring to be undertaken will be<br>prepared by the Franchisee as part of the<br>PAFF Operations Manual and the details<br>will be agreed with the relevant<br>authorities prior to the commencement<br>of operation of the PAFF. Monitoring<br>should include but not be limited to the<br>parameters of TPH and PAH and<br>reference should be made to the existing<br>monitoring programme undertaken for<br>the fuel tank farm on the HKIA platform. | Operational<br>phase.<br>Location and<br>frequency to be<br>determined and<br>agreed with<br>relevant  | Franchisee              | EM&A Manual                            |         |   |                 | Y        | N/A                   | Pending                  |
| Ecology<br>7.8   | 5.3                         | Undertake post construction dolphin abundance monitoring.  | Construction   | Contractor              | TMEIA                                  |         | Ŷ |                 |          | N/A                   | Pending                  |

| EIA<br>Reference | EM&A<br>Manual<br>Reference |  | Location /<br>Timing   | Implementation<br>Agent | Relevant                   | Implementation |          |   | Maintenance | Implementation |
|------------------|-----------------------------|--|--|-------------------------|----------------------------|----------------|----------|---|-------------|----------------|
|                  |                             |  |  |                         | Standard or<br>Requirement |                | Schedule |   | Agency      | Status         |
|                  |                             |  |  |                         |                            | D              | C        | 0 |             |                |
| 7.8              | 5.3                         | A 500m dolphin exclusion zone shall be<br>implemented and dredging shall not<br>begin until the observer has confirmed<br>that the area has been clear for 30<br>minutes.  | 250m around<br>dredger/throug<br>hout dredging<br>in Marine Park<br>and along the<br>length of<br>pipeline | Contractor              | TMEIA                      |                | Y        |   | N/A         | Completed      |
| 7.8              | 5.3                         | Avoidance of dolphin main calving season between March and August.   | Throughout<br>dredging in<br>Marine Park<br>and along the<br>length of the<br>pipeline                     | Contractor              | TMEIA                      |                | Y        |   | N/A         | Completed      |
| Landscape        |                             |  |  |                         |                            |                |          |   |             |                |
| 8.10             | 7.2.1                       | The construction programme for the PAFF should be reduced to the shortest possible period.   | PAFF site /<br>throughout<br>construction<br>period  | Contractor              | TMEIA                      | Y              | Y        |   | N/A         | Ongoing        |
| 8.10             | 7.2.1                       | The extent and periphery of the works<br>areas should be managed so that they are<br>as small as possible and do not appear<br>cluttered, untidy and unattractive,<br>particularly to road traffic along Lung<br>Mun Road. | PAFF site /  | Contractor              | TMEIA                      |                | Y        | Y | N/A         | Ongoing        |
| 8.10             | 7.2.1                       | Temporary hoarding barriers should be<br>of a recessive visual appearance in both<br>colour and form.  | PAFF site /<br>throughout<br>construction<br>period  | Contractor              | TMEIA                      | Y              | Y        |   | N/A         | Ongoing        |
| 8.10             | 7.2.1                       | Materials should be stored in areas with<br>the least obstruction to residents,<br>pedestrians and traffic.  | PAFF site /<br>throughout<br>construction<br>period  | Contractor              | TMEIA                      |                | Y        | Y | N/A         | Ongoing        |
| 8.10             | 7.2.1                       | All material stockpiles should be covered<br>with an impermeable material and<br>sandbagging diversions should be<br>placed around exposed soil.   | *  | Contractor              | TMEIA                      |                | Y        | Y | N/A         | Ongoing        |

| EIA       | EM&A      | <b>Environmental Protection Measures</b>  | Location /  | Implementation    | Relevant    | Imp | lement | ation | Maintenance | Implementation |
|-----------|-----------|---|---|-------------------|-------------|-----|--------|-------|-------------|----------------|
| Reference | Manual    |   | Timing  | Agent             | Standard or | :   | Schedu | le    | Agency      | Status         |
|           | Reference |   |   |                   | Requirement | D   | С      | 0     |             |                |
| 8.10      | 7.2.1     | Conservation of existing and imported soil resources.   | PAFF site /<br>throughout<br>construction<br>period of fuel<br>tank expansion | Contractor        | TMEIA       |     |        | Y     | N/A         | Ongoing        |
| 8.10      | 7.2.1     | A landscape perimeter bund comprising<br>containment bund-wall, access road and<br>planting buffer shall be built and<br>maintained around the tank farm. | PAFF site /<br>throughout<br>construction<br>period                           | Project Proponent | TMEIA       | Y   | Y      | Y     | Franchisee  | Ongoing        |
| 8.10      | 7.2.1     | The design of the PAFF should<br>incorporate materials, details and<br>textures which are visually recessive.   | PAFF site /<br>design   | Project Proponent | TMEIA       | Y   | Y      |       | N/A         | Ongoing        |
| 8.10      | 7.2.1     | Colours should be of low chromatic<br>intensity to reduce the potential contrast<br>between the structure and their<br>background.                        | PAFF site tanks<br>/ design   | Project Proponent | TMEIA       | Y   | Y      |       | N/A         | Ongoing        |
| 8.10      | 7.2.1     | Visually recessive security fencing should be used around the perimeter.  | Site perimeter  | Project Proponent | TMEIA       | Y   | Y      | Y     | N/A         | Ongoing        |
| 8.10      | 7.2.1     | Minimum amount of lighting for the<br>tanks shall be used, only applied for<br>safety at the key access points and<br>staircases.                         | Tanks /<br>Operational<br>phase   | Project Proponent | TMEIA       | Y   | Y      | Y     | N/A         | Ongoing        |
| 8.10      | 7.2.1     | Limited lighting intensity on the site.   | PAFF site /<br>Operational<br>phase   | Project Proponent | TMEIA       | Y   | Y      | Y     | N/A         | Ongoing        |
| 8.10      | 7.2.1     | Directional down lighting is suggested to<br>minimise light spill to the surrounding<br>area.   | •   | Project Proponent | TMEIA       | Y   | Y      | Y     | N/A         | Ongoing        |

Cultural Heritage

| EIA       | EM&A      | Environmental Protection Measures   | Location /                        | Implementation | Relevant    | In | nplementation | Maintenance | Implementation |
|-----------|-----------|---|-----------------------------------|----------------|-------------|----|---------------|-------------|----------------|
| Reference | Manual    |   | Timing                            | Agent          | Standard or |    | Schedule      | Agency      | Status         |
|           | Reference |   | -                                 | -              | Requirement | D  | C O           |             |                |
| 9.8.1     | 9.2.1     | Undertake a watching brief during<br>dredging of the pipeline within 25m<br>either side of anomalies SS1 and SS2.<br>This should comprise:  | Within vicinity<br>of SS1 and SS2 | Franchisee     | TMEIA       |    | Y             | N/A         | Completed      |
|           |           | • Dredge operators to be made aware<br>of the potential presence of cultural<br>heritage material. The operators<br>would be required to report to the<br>AMO any unusual resistance and/or<br>recovery of timbers, anchors or other<br>wreck related material. Any<br>obstacles encountered during the<br>dredging that are of timber should be<br>reported to the marine archaeologist.<br>The obstacle should be avoided and<br>not removed until it has been<br>assessed by the marine archaeologist<br>as to whether the obstacle is of<br>cultural heritage importance; |                                   |                |             |    |               |             |                |
|           |           | <ul> <li>A marine archaeologist shall be on<br/>board the dredging barge during<br/>dredging within 25m either side of<br/>SS1 and SS2 in the event of any<br/>unusual resistance occurring or<br/>blockages which requires the dredge<br/>head to be bought on deck for<br/>cleaning and examination; and,</li> <li>Dredging to cease in the nominated<br/>area SS1 after 3 meters of sediment<br/>removal and after 1 metre for SS2.<br/>A dive survey will then be<br/>undertaken to examine the trench for<br/>possible cultural remains.</li> </ul>                      |                                   |                |             |    |               |             |                |

| EIA          | EM&A      | <b>Environmental Protection Measures</b>                                 | Location /                    | Implementation | Relevant    | In | nplementa |    | Maintenance | Implementation                        |
|--------------|-----------|--|-------------------------------|----------------|-------------|----|-----------|----|-------------|---------------------------------------|
| Reference    | Manual    |  | Timing                        | Agent          | Standard or | _  | Schedul   |    | Agency      | Status                                |
|              | Reference |  |                               |                | Requirement | D  | C         | 0  |             |                                       |
| 9.8.2        | 9.2.1     | During the course of the watching brief,                                 | With vicinity of              | Franchisee     | TMEIA       |    | Y         |    | N/A         | Not applicable                        |
|              |           | if the targets are identified as being                                   | SS1 and SS2                   |                |             |    |           |    |             |                                       |
|              |           | potentially archaeologically important,                                  |                               |                |             |    |           |    |             |                                       |
|              |           | then an immediate marine archaeological                                  |                               |                |             |    |           |    |             |                                       |
|              |           | impact assessment in accordance with                                     |                               |                |             |    |           |    |             |                                       |
|              |           | EIAO TM Annex 19 will be required to be undertaken by a qualified marine |                               |                |             |    |           |    |             |                                       |
|              |           | archaeologist.   |                               |                |             |    |           |    |             |                                       |
| 9.8.4        | 9.2.1     | Any changes, additions or alterations to                                 | Pipeline                      | Franchisee     | TMEIA       |    | Y         |    | N/A         | Not applicable                        |
|              |           | the dredging method and alignment  | alignment                     |                |             |    |           |    |             | I I I I I I I I I I I I I I I I I I I |
|              |           | should be further assessed by marine                                     | 0                             |                |             |    |           |    |             |                                       |
|              |           | archaeologist to determine if any further                                |                               |                |             |    |           |    |             |                                       |
|              |           | assessment is required.  |                               |                |             |    |           |    |             |                                       |
| Fuel Spill I | Risk      |  |                               |                |             |    |           |    |             |                                       |
| 11.4.1       | 10.2      | Tank farms will be constructed in a                                      | Tank farm /                   | Franchisee     | TMEIA       | Y  |           |    | N/A         | On going                              |
|              |           | bunded area surrounding the tanks  | Design Phase                  |                |             |    |           |    |             |                                       |
|              |           | which will have collection capacity of                                   |                               |                |             |    |           |    |             |                                       |
|              |           | 150% of the maximum content of the                                       |                               |                |             |    |           |    |             |                                       |
| 11.4.1       | 10.2      | largest tank.<br>Emergency shut down valves shall be                     | Tank farm /                   | Franchisee     | TMEIA       | Y  |           |    | N/A         | On going                              |
| 11.4.1       | 10.2      | installed within the wider site storm                                    | Design Phase                  | Flanchisee     | IWIEIA      | 1  |           |    | N/A         | On going                              |
|              |           | drainage system.   | Design i nase                 |                |             |    |           |    |             |                                       |
| 11.4.1       | 10.2      | An impermeable membrane shall be   | Tank farm /                   | Franchisee     | TMEIA       | Ŷ  |           |    | N/A         | On going                              |
|              |           | installed in the tank foundation beneath                                 | Design Phase                  |                |             | _  |           |    | ,           |                                       |
|              |           | the tank bottom.   | 0                             |                |             |    |           |    |             |                                       |
| 11.4.1       | 10.2      | Pipeline to be covered with a protective                                 | Pipelines/                    | Franchisee     | TMEIA       | Y  |           |    | Franchisee  | On going                              |
|              |           | rock armour layer.   | Design Phase                  |                |             |    |           |    |             |                                       |
| 11.4.1       | 10.2      | An integrated leak detection system shall                                | -                             | Franchisee     | TMEIA       | Y  |           |    | N/A         | On going                              |
|              |           | be installed to all pipelines to provide                                 | Design Phase                  |                |             |    |           |    |             |                                       |
|              |           | early detection of any leak.   |                               |                |             |    |           |    |             |                                       |
| 11.4.1       | 10.2      | An automatic shut-off system shall be                                    | Pipelines/                    | Franchisee     | TMEIA       | Y  |           |    | N/A         | On going                              |
| 11 4 1       | 10.2      | implemented for pipelines.   | Design Phase                  | En alta        |             |    |           | N/ | NT / A      | Dec I'r r                             |
| 11.4.1       | 10.2      | A workboat shall be on standby at the                                    | Jetty/ During<br>Tanker Berth | Franchisee     | TMEIA       | Y  |           | Y  | N/A         | Pending                               |
| 11.4.1       | 10.2      | jetty during tanker berthing.<br>Skimmers shall be available for quick   | Jetty/ During                 | Franchisee     | TMEIA       | Ŷ  |           | Y  | N/A         | Pending                               |
| 11.4.1       | 10.2      | deployment in case of a spill.   | Tanker Berth                  | manchisee      | IWIEIA      | I  |           | 1  | 1N/A        | renuing                               |
|              |           | deproyment in case of a spin.  | ranker Dertit                 |                |             |    |           |    |             |                                       |

| EIA<br>Reference | EM&A<br>Manual | Environmental Protection Measures   | Location /<br>Timing  | Implementation<br>Agent | Relevant<br>Standard or |   | plement<br>Schedu | le | Maintenance<br>Agency | Implementation<br>Status |
|------------------|----------------|---|---|-------------------------|-------------------------|---|-------------------|----|-----------------------|--------------------------|
|                  | Reference      |   |   |                         | Requirement             | D | С                 | 0  |                       |                          |
| 11.4.1           | 10.2           | An emergency response plan shall be<br>prepared prior to the operation of the<br>PAFF.  | Jetty/ During<br>Tanker Berth                               | Franchisee              | TMEIA                   | Y |                   | Y  | N/A                   | Pending                  |
| 11.4.1           | 10.2           | Operator-training programme shall be implemented.   | Jetty/ During<br>Tanker Berth                               | Franchisee              | TMEIA                   | Y |                   | Y  | N/A                   | Pending                  |
| 11.6             | 10.4           | During the planning of the later phase of<br>the tank farm development, in order to<br>ensure that the required mitigation<br>measures are undertaken at that time,<br>review the EIA report only if the latest<br>technology, industrial standards and<br>statutory requirements have changed by<br>that time. | During<br>planning stage<br>for future tank<br>construction | Franchisee              | TMEIA                   |   |                   | Y  | N/A                   | Pending                  |
| 11.6             | 10.4           | Regular inspections and audits will be<br>undertaken by the Franchisee during the<br>operational phase of the facility:   | Operation   | Franchisee              | TMEIA                   |   |                   | Υ  | N/A                   | Pending                  |
|                  |                | • Two inspections every year of the tank farm, jetty and pipelines including one undertaken pursuant to the Joint Inspection Group (JIG) explained above;   |   |                         |                         |   |                   |    |                       |                          |
|                  |                | • Inspection of the whole sub sea pipelines every 5 to 10 years;  |   |                         |                         |   |                   |    |                       |                          |
|                  |                | • Health, Safety and Environmental audit of the facility once every 3 years; and,   |   |                         |                         |   |                   |    |                       |                          |
|                  |                | • Inspection of the structural integrity of the tanks once per year.  |   |                         |                         |   |                   |    |                       |                          |

| EIA        | EM&A                  | <b>Environmental Protection Measures</b>                                       | Location /         | Implementation | Relevant    | - | lement |        | Maintenance | Implementation |
|------------|-----------------------|--|--------------------|----------------|-------------|---|--------|--------|-------------|----------------|
| Reference  | Manual<br>Bafarran aa |  | Timing             | Agent          | Standard or |   | Schedu |        | Agency      | Status         |
| 11 (       | Reference             | Decrease on Engline and al Margarente  | Prior to the start | Enershiers     | Requirement | D | С      | O<br>Y | NT / A      | Dending        |
| 11.6       | 10.4                  | Prepare an Environmental Management<br>Plan to ensure the on-going adequacy of | of operation of    | Franchisee     | TMEIA       |   |        | ĭ      | N/A         | Pending        |
|            |                       | the fuel spill contingency plan and that it                                    | *                  |                |             |   |        |        |             |                |
|            |                       | is being implemented as required and   | audits every 12    |                |             |   |        |        |             |                |
|            |                       | that the above mitigation measures have  |                    |                |             |   |        |        |             |                |
|            |                       | been incorporated and are effective.   |                    |                |             |   |        |        |             |                |
| Land Conta | amination             | 1  |                    |                |             |   |        |        |             |                |
| 13.5.1     | 10.2                  | Bunding shall be provided by all fuel  | Tank farm /        | Franchisee     | TMEIA       | Y |        |        | N/A         | On going       |
|            |                       | storage areas to at least 150% of largest                                      | Design             |                |             |   |        |        |             |                |
|            |                       | individual tank in each compound.  |                    |                |             |   |        |        |             |                |
| 13.5.1     | 10.2                  | Relevant design standards for storage  | Tank farm /        | Franchisee     | TMEIA       | Y |        |        | N/A         | On going       |
|            |                       | tanks, pipework, containment and   | Design             |                |             |   |        |        |             |                |
|            |                       | drainage shall be adhered to.  |                    |                |             |   |        | • /    |             | <b>a</b> .     |
| 13.5.1     | 10.2                  | Plant inspections and maintenance shall  | Tank farm /        | Franchisee     | TMEIA       | Y | Y      | Y      | N/A         | On going       |
| 10 E 1     | 10.2                  | be undertaken once per month.  | Design             | Franchisee     | TMEIA       | V |        |        | NT / A      | On asima       |
| 13.5.1     | 10.2                  | Impermeable lining shall be provided for all tank pits.                        | Design             | Franchisee     | IMEIA       | Y |        |        | N/A         | On going       |
| 13.5.1     | 10.2                  | Leak detection systems shall be provided                                       | 0                  | Franchisee     | TMEIA       | Y |        |        | N/A         | On going       |
| 10.0.1     | 10.2                  | to all valves.   | Design             | Francinsee     | 110112173   | 1 |        |        | 11/11       | Ongoing        |
| 13.5.1     | 10.2                  | Surface drainage shall be contained and  | Tank farm /        | Franchisee     | TMEIA       | Y | Y      | Y      | N/A         | On going       |
|            |                       | treated prior to discharge.  | Design             |                |             |   |        |        | · ·         | - 0- 0         |
| 13.5.1     | 10.2                  | Emergency spill response plans shall be  | Tank farm /        | Franchisee     | TMEIA       | Y |        | Y      | N/A         | Pending        |
|            |                       | prepared.  | Design             |                |             |   |        |        |             | Ū.             |
| 13.5.1     | 10.2                  | Spill control materials and equipment  | Tank farm /        | Franchisee     | TMEIA       | Y |        | Y      | N/A         | Pending        |
|            |                       | shall be provided on site.   | Design             |                |             |   |        |        |             |                |
| 13.5.1     | 10.2                  | Runoff from the rood of site buildings   | Tank farm /        | Franchisee     | TMEIA       | Y |        | Y      | N/A         | On going       |
|            |                       | and landscaped areas shall be conveyed   | Design             |                |             |   |        |        |             |                |
|            |                       | in closed drains to the nearest storm  |                    |                |             |   |        |        |             |                |
|            |                       | water drain to prevent the generation of                                       |                    |                |             |   |        |        |             |                |
|            |                       | excessive quantities of surface water  |                    |                |             |   |        |        |             |                |
| 13.5.5     | 10.2                  | which may be polluted.<br>Suitable absorbent materials (e.g. sand or           | Tank farm /        | Franchisee     | TMEIA       | Y |        |        | N/A         | Pending        |
| 10.0.0     | 10.4                  | earth) shall be kept on site to deal with                                      | Design             | 11010111300    | 1 1011217 7 | 1 |        |        | 1 N/ 1 X    | I Chung        |
|            |                       | spills. Chemical dispersants shall not   | 20060              |                |             |   |        |        |             |                |
|            |                       | be employed.   |                    |                |             |   |        |        |             |                |
|            |                       | ·····  |                    |                |             |   |        |        |             |                |

| EIA<br>Reference | EM&A<br>Manual | Environmental Protection Measures   | Location /<br>Timing  | Implementation<br>Agent | Relevant<br>Standard or | - | olement<br>Schedu |   | Maintenance<br>Agency | Implementation<br>Status |
|------------------|----------------|---|-----------------------|-------------------------|-------------------------|---|-------------------|---|-----------------------|--------------------------|
|                  | Reference      |   | C                     | C                       | Requirement             | D | С                 | 0 | 0.                    |                          |
| 13.5.5           | 10.2           | The facility shall be designed,<br>constructed, operated and maintained in<br>full accordance with the Code of Practice<br>for Oil Installations, 1992.   | Tank farm /<br>Design | Franchisee              | TMEIA                   | Y | Y                 | Y | N/A                   | On going                 |
| 13.5.5           | 10.2           | Tank pressure testing shall be carried out<br>routinely to check for possible tank leaks.<br>Product inventory monitoring shall be<br>integrated into site management<br>procedures to check for any abnormal or<br>unexpected product loss.                                | -                     | Franchisee              | TMEIA                   | Y | Y                 | Y | N/A                   | On going                 |
| 13.5.5           | 10.2           | Tank overfill monitoring systems shall<br>be installed and regularly tested. Inlet<br>valves shall be designed to automatically<br>shutdown on exceedance of "high-high<br>level" to prevent over-filling.  | Tank farm /<br>Design | Franchisee              | TMEIA                   | Y | Y                 | Y | N/A                   | On going                 |
| 13.5.5           | 10.2           | Pipe leakages shall be routinely checked<br>for by means of a pressure sensitive leak<br>detection system and routine inventory<br>control.   | Tank farm /<br>Design | Franchisee              | TMEIA                   | Y | Y                 | Y | N/A                   | On going                 |
| 13.5.5           | 10.2           | Drainage from areas of hardstanding<br>shall be treated by means of oil/water<br>separators prior to discharge to storm<br>drain. All surface drainage shall be<br>fitted with closure valves to provide<br>additional containment and facilitate<br>clean up of any leaks. | Tank farm /<br>Design | Franchisee              | TMEIA                   | Y | Y                 | Y | N/A                   | On going                 |
| 13.5.5           | 10.2           | The delivery pipeline from the jetty and<br>the supply line to the airport shall be<br>fitted with pressure sensitive leak<br>detectors.  | Tank farm /<br>Design | Franchisee              | TMEIA                   | Y | Y                 |   | N/A                   | On going                 |
| Waste Man        | agement        |   |                       |                         |                         |   |                   |   |                       |                          |
| 14.7.2           | 8.3.1          | The Contractor shall identify a coordinator for the management of waste.  | Contract mobilisation | Contractor              | TMEIA                   |   | Y                 |   | N/A                   | Ongoing                  |

| EIA<br>Reference | EM&A<br>Manual | Environmental Protection Measures  | Location/<br>Timing                               | Implementation<br>Agent | Relevant<br>Standard or  |   | hedu |   | Maintenance<br>Agency | Implementation<br>Status |
|------------------|----------------|--|---|-------------------------|--|---|------|---|-----------------------|--------------------------|
| 1470             | Reference      | The superior of and in store shall supervise and   | Combrach  | Caraturatan             | Requirement  | D | C    | 0 |                       | Onacina                  |
| 14.7.2           | 8.3.1          | The waste coordinator shall prepare and<br>implement a Waste Management Plan<br>which specifies procedures such as<br>ticketing system, to facilitate tracking of<br>loads and to ensure that illegal disposal<br>of waste does not occur, and protocols<br>for the maintenance of records of the<br>quantities of wastes generated, recycled<br>and disposal. | Contract<br>mobilisation                          | Contractor              | TMEIA, Works<br>Branch<br>Technical<br>Circular No.<br>5/99 for the<br>Trip-ticket<br>System for<br>Disposal of<br>Construction<br>and Demolition<br>Material  |   | Υ    |   | N/A                   | Ongoing                  |
| 14.7.2           | 8.3.1          | The Contractor shall apply for and<br>obtain the appropriate licenses for the<br>disposal of public fill, chemical waste<br>and effluent discharges.   | Contract<br>mobilisation                          | Contractor              | TMEIA, Land<br>(Miscellaneous<br>Provisions)<br>Ordinance (Cap<br>28); Waste<br>Disposal<br>Ordinance (Cap<br>354); Dumping<br>at Sea<br>Ordinance (Cap<br>466); Water<br>Pollution<br>Control<br>Ordinance. |   | Y    |   | N/A                   | Ongoing                  |
| 14.7.2           | 8.3.1          | No waste shall be burnt on site.   | PAFF Site<br>throughout<br>construction<br>period | Contractor              | TMEIA  |   | Y    |   | N/A                   | Ongoing                  |
| 14.7.2           | 8.3.1          | Excavated material shall be used on site<br>for purposes of landscaping or formation<br>of bund walls as far as possible.  | All site /  | Contractor              | TMEIA  |   | Y    |   | N/A                   | Ongoing                  |

| EIA<br>Reference | EM&A<br>Manual<br>Reference | Environmental Protection Measures   | Location /<br>Timing                                | Implementation<br>Agent | Relevant<br>Standard or<br>Requirement | Im<br>D | Scl | ment<br>hedul<br>C | ation<br>le<br>O | Maintenance<br>Agency | Implementation<br>Status |
|------------------|-----------------------------|---|---|-------------------------|--|---------|-----|--------------------|------------------|-----------------------|--------------------------|
| 14.7.2           | 8.3.1                       | All material shall be reused on site as far<br>as practicable, including formwork<br>plywood, topsoil and excavated material.   | All site /<br>throughout<br>construction<br>period  | Contractor              | TMEIA                                  | <u></u> |     | <u>с</u><br>Ү      | 0                | N/A                   | Ongoing                  |
| 14.7.2           | 8.3.1                       | Suitable provisions shall be included in<br>the construction contract to ensure that<br>the Contractor sorts and recycles waste.  | Contract<br>preparation<br>stage                    | HyD                     | TMEIA                                  | Y       |     |                    |                  | N/A                   | Ongoing                  |
| 14.7.2           | 8.3.1                       | Re-use and recycling of waste must<br>always be considered first. Waste<br>disposal shall only be undertaken in the<br>last resort. Any surplus material<br>generated shall be sorted on site into<br>construction and demolition (C&D)<br>waste and the public fill fraction. A<br>sorting facility shall be set up on the site. | All areas /<br>throughout<br>construction<br>period | Contractor              | TMEIA                                  |         |     | Υ                  |                  | N/A                   | Ongoing                  |
| 14.7.2           | 8.3.1                       | The site and surroundings shall be kept<br>tidy and litter free.  | All areas /<br>throughout<br>construction<br>period | Contractor              | TMEIA                                  |         |     | Υ                  |                  | N/A                   | Ongoing                  |
| 14.7.2           | 8.3.1                       | The C&D waste shall be disposed of at a<br>licensed landfill or deposited at an<br>authorised waste transfer facility and the<br>material suitable for public fill delivered<br>to a public filling area, public filling<br>barging point or public fill stockpile area<br>after obtaining the appropriate licence.               | CEDD pubic fill<br>stockpile in Mui                 | Contractor              | TMEIA                                  |         |     | Υ                  |                  | N/A                   | Ongoing                  |
| 14.7.2           | 8.3.1                       | Stockpile material shall avoid vegetated areas.   | All areas /<br>throughout<br>construction<br>period | Contractor              | TMEIA                                  |         |     | Y                  |                  | N/A                   | Ongoing                  |

| EIA<br>Reference | EM&A<br>Manual | Environmental Protection Measures                                       | Location /<br>Timing   | Implementation<br>Agent | Relevant<br>Standard or  | In | - | nenta<br>1edul |   | Maintenance<br>Agency | Implementation<br>Status |
|------------------|----------------|---|--|-------------------------|--|----|---|----------------|---|-----------------------|--------------------------|
|                  | Reference      |   |  |                         | Requirement  | D  |   | С              | 0 |                       |                          |
| 14.7.2           | 8.3.1          | Stockpiles shall be covered by tarpaulin<br>and/or watered as required. | All areas /<br>throughout<br>construction<br>period,<br>particularly<br>during dry<br>season | Contractor              | TMEIA, Public<br>Health and<br>Municipal<br>Services<br>Ordinance (Cap<br>132) and the<br>Public<br>Cleansing and<br>Prevention of<br>Nuisances<br>(Regional<br>Council) By-<br>laws |    |   | Y              |   | N/A                   | Ongoing                  |
| 14.7.2           | 8.3.1          | Storage of material on site should be kept<br>to a minimum.             | All areas /<br>throughout<br>construction<br>period  | Contractor              | TMEIA, Public<br>Cleansing and<br>Prevention of<br>Nuisances<br>(Regional<br>Council) By-<br>laws  |    |   | Υ              |   | N/A                   | Ongoing                  |

| EIA<br>Reference | EM&A<br>Manual<br>Reference | Environmental Protection Measures   | Location /<br>Timing  | Implementation<br>Agent | Relevant<br>Standard or<br>Requirement  | Ir<br>D | - | emen<br>chedi<br>C | itation<br>ule<br>O | Maintenance<br>Agency | Implementation<br>Status |
|------------------|-----------------------------|---|---|-------------------------|---|---------|---|--------------------|---------------------|-----------------------|--------------------------|
| 14.7.2           | 8.3.1                       | Excavated material in trucks shall be<br>covered by tarpaulins.   | All areas,<br>particularly at<br>site exits /<br>throughout<br>construction<br>period | Contractor              | TMEIA, Reduce<br>the potential for<br>spillage and<br>dust. Public<br>Health and<br>Municipal<br>Services<br>Ordinance (Cap<br>132) and the<br>Public<br>Cleansing and<br>Prevention of<br>Nuisances<br>(Regional<br>Council) By-<br>laws |         |   | Ŷ                  |                     | N/A                   | Ongoing                  |
| 14.7.2           | 8.3.1                       | Wheel washing facilities shall be used by<br>all trucks leaving the site to prevent the<br>transfer of mud onto public roads. | Site entrances<br>and exits/<br>throughout<br>construction<br>period                  | Contractor              | TMEIA, Public<br>Cleansing and<br>Prevention of<br>Nuisances<br>(Regional<br>Council) By-<br>laws   |         |   | Υ                  |                     | N/A                   | Ongoing                  |
| 14.7.2           | 8.3.1                       | Suitable chemical waste storage areas<br>should be formed at the works site for<br>temporary storage pending collection.      | Works site/<br>throughout<br>construction<br>period                                   | Contractor              | TMEIA, Code of<br>Practice on the<br>Packaging,<br>Labelling and<br>Storage of<br>Chemical<br>Wastes. A<br>Guide to the<br>Chemical Waste<br>Control Scheme   |         |   | Υ                  |                     | N/A                   | Ongoing                  |

| EIA<br>Reference | EM&A<br>Manual<br>Reference | Environmental Protection Measures  | Location/<br>Timing  | Implementation<br>Agent | Relevant<br>Standard or<br>Requirement   | In<br>D | - | menta<br>hedul<br>C | Maintenance<br>Agency | Implementation<br>Status |
|------------------|-----------------------------|--|--|-------------------------|--|---------|---|---------------------|-----------------------|--------------------------|
| 14.7.2           | 8.3.1                       | A licensed contractor shall be employed<br>to collect chemical waste for delivery to a<br>licensed treatment facility. | Chemical waste<br>treatment<br>facility at Tsing<br>Yi / throughout<br>construction<br>period                  |                         | TMEIA, Code of<br>Practice on the<br>Packaging,<br>Labelling and<br>Storage of<br>Chemical<br>Wastes. A<br>Guide to the<br>Chemical Waste<br>Control Scheme                |         |   | Ŷ                   | N/A                   | Ongoing                  |
| 14.7.2           | 8.3.1                       | Temporary storage areas for general<br>refuse should be enclosed to avoid<br>environmental impacts.                    | All areas/<br>throughout<br>construction<br>period   | Contractor              | TMEIA, Public<br>Health and<br>Municipal<br>Services<br>Ordinance  |         |   | Y                   | N/A                   | Ongoing                  |
| 14.7.2           | 8.3.1                       | Sufficient dustbins should be provided for storage of waste.   | All areas/<br>throughout<br>construction<br>period   | Contractor              | TMEIA, Public<br>Cleansing and<br>Prevention of<br>Nuisances<br>Ordinance<br>(Regional<br>Council) By-<br>laws, Public<br>Health and<br>Municipal<br>Services<br>Ordinance |         |   | Υ                   | N/A                   | Ongoing                  |
| 14.7.2           | 8.3.1                       | General refuse should be cleared daily<br>and should be disposed of to the nearest<br>licensed facility.               | All areas,<br>WENT landfill<br>or NWNT<br>refuse transfer<br>stations/<br>throughout<br>construction<br>period | Contractor              | TMEIA,<br>Sanitation and<br>Conservancy<br>(Regional<br>Council) By-<br>laws   |         |   | Υ                   | N/A                   | Ongoing                  |

| EIA<br>Reference | EM&A<br>Manual<br>Reference | Environmental Protection Measures   | Location /<br>Timing                               | Implementation<br>Agent | Relevant<br>Standard or<br>Requirement | In<br>D | - | ement<br>hedu<br>C | Maintenance<br>Agency | Implementation<br>Status |
|------------------|-----------------------------|---|--|-------------------------|--|---------|---|--------------------|-----------------------|--------------------------|
| 14.7.2           | 8.3.1                       | Waste oils, chemicals or solvents shall<br>not be disposed of to drain.   | PAFF site/<br>throughout<br>construction<br>period | Contractor              | TMEIA                                  |         |   | Y                  | N/A                   | Ongoing                  |
| 14.7.2           | 8.3.1                       | Good site practice shall be implemented<br>to avoid waste generation and promote<br>waste minimisation.   | PAFF site/<br>throughout<br>construction<br>period | Contractor              | TMEIA                                  |         |   | Y                  |                       | Ongoing                  |
| 14.7.2           | 8.3.1                       | Waste materials such as paper, metal,<br>timber and waste oil shall be recycled as<br>far as practicable.   | PAFF site/<br>throughout<br>construction<br>period | Contractor              | TMEIA                                  |         |   | Y                  | N/A                   | Ongoing                  |
| 14.7.2           | 8.3.1                       | Temporary structures used during<br>construction shall be provided in the<br>form of proprietary Protakabin type<br>units sited on areas of permanent hard<br>paving units as far as practicable. | PAFF site/<br>throughout<br>construction<br>period | Contractor              | TMEIA                                  |         |   | Υ                  | N/A                   | Ongoing                  |
| 14.7.2           | 8.3.1                       | Dredged marine mud shall be disposed<br>of in a gazetted marine disposal ground<br>under the requirements of the Dumping<br>at Sea Ordinance.   | PAFF site/<br>throughout<br>construction<br>period |                         |  |         |   | Y                  | N/A                   | Completed                |
| 14.7.2           | 8.3.1                       | All waste containers shall be in good<br>condition and fitted with lids or covers<br>to prevent waste from escaping or the<br>ingress of water.   | PAFF site/<br>throughout<br>construction<br>period | Contractor              | TMEIA                                  |         |   | Y                  | N/A                   | Ongoing                  |
| 14.7.2           | 8.3.1                       | All waste containers shall be in a secure area on hardstanding.   | PAFF site/<br>throughout<br>construction<br>period | Contractor              | TMEIA                                  |         |   | Y                  | N/A                   | Ongoing                  |
| 14.7.2           | 8.3.1                       | Emergency equipment to deal with any spillage or fire shall be kept on site.  | PAFF site/<br>throughout<br>construction<br>period |                         | TMEIA                                  |         |   | Y                  | N/A                   | Ongoing                  |
| 14.7.2           | 8.3.1                       | All containers used for storage of<br>chemical waste shall be maintained in<br>good condition and clearly labelled in<br>both English and Chinese.  | PAFF site/<br>throughout<br>construction<br>period | Contractor              | TMEIA                                  |         |   | Y                  | N/A                   | Ongoing                  |

| EIA<br>Reference | EM&A<br>Manual<br>Reference | Environmental Protection Measures                                   | Location /<br>Timing    | Implementation<br>Agent | Relevant                   | Implementation |   |   | Maintenance<br>Agency | Implementation<br>Status |
|------------------|-----------------------------|---|-------------------------|-------------------------|----------------------------|----------------|---|---|-----------------------|--------------------------|
|                  |                             |   |                         |                         | Standard or<br>Requirement | Schedule       |   |   |                       |                          |
|                  |                             |   |                         |                         |                            | D              | С | 0 |                       |                          |
| 14.7.2           | 8.3.1                       | All storage areas for chemical waste shall                          | PAFF site/              | Contractor              | TMEIA                      |                | Y |   | N/A                   | Ongoing                  |
|                  |                             | be:   | throughout              |                         |                            |                |   |   |                       |                          |
|                  |                             | Clearly labelled;   | construction            |                         |                            |                |   |   |                       |                          |
|                  |                             | <ul> <li>Enclosed on at least 3 sides;</li> </ul>                   | period                  |                         |                            |                |   |   |                       |                          |
|                  |                             | <ul> <li>Have impermeable floor and</li> </ul>                      |                         |                         |                            |                |   |   |                       |                          |
|                  |                             | bunding sufficient to fully retain any                              |                         |                         |                            |                |   |   |                       |                          |
|                  |                             | spillage or leakages;   |                         |                         |                            |                |   |   |                       |                          |
|                  |                             | • Ventilated; and,  |                         |                         |                            |                |   |   |                       |                          |
|                  |                             | <ul> <li>Covered to prevent rainfall from<br/>entering.</li> </ul>  |                         |                         |                            |                |   |   |                       |                          |
| 14.7.2           | 8.3.1                       | All types of asbestos including sources                             | PAFF site/              | Contractor              | TMEIA                      |                | Y |   | N/A                   | Ongoing                  |
|                  |                             | (such as clutch linings) shall be treated as                        | throughout              |                         |                            |                |   |   |                       |                          |
|                  |                             | chemical waste. Asbestos containing                                 | construction            |                         |                            |                |   |   |                       |                          |
|                  |                             | wastes shall be kept separate from other                            | period                  |                         |                            |                |   |   |                       |                          |
|                  |                             | wastes.   |                         |                         |                            |                |   |   |                       |                          |
| 14.7.2           | 8.3.1                       | All leaking containers shall be contained                           | PAFF site/              | Contractor              | TMEIA                      |                | Y |   | N/A                   | Ongoing                  |
|                  |                             | and removed from site an soon as is                                 | throughout              |                         |                            |                |   |   |                       |                          |
|                  |                             | reasonably practicable.   | construction            |                         |                            |                |   |   |                       |                          |
|                  | 0.0.1                       | m · · · · · · · · · · · · · · · · · · ·                             | period                  |                         |                            |                | N |   | NT / A                | <b>O</b> .               |
| 14.7.2           | 8.3.1                       | Training shall be provided to workers                               | PAFF site/              | Contractor              | TMEIA                      |                | Y |   | N/A                   | Ongoing                  |
|                  |                             | about the concepts of site cleanliness and                          | throughout construction |                         |                            |                |   |   |                       |                          |
|                  |                             | appropriate waste management procedures, including waste reduction, | period                  |                         |                            |                |   |   |                       |                          |
|                  |                             | reuse and recycling.  | penou                   |                         |                            |                |   |   |                       |                          |
| 14.7.2           | 8.3.1                       | EM&A of waste handling, storage,                                    | All areas/              | Contractor              | TMEIA                      |                | Y |   | N/A                   | Ongoing                  |
| Section 5        | 0.0.1                       | transportation, disposal procedures and                             | throughout              | contractor              | 1 1/11/17 1                |                | 1 |   | /                     | Cheome                   |
|                  |                             | documentation through the site audit                                | construction            |                         |                            |                |   |   |                       |                          |
|                  |                             | programme shall be undertaken.                                      | period                  |                         |                            |                |   |   |                       |                          |

ERM has over 100 offices Across the following countries worldwide

Argentina Australia Azerbaijan Belgium Brazil Canada Chile China France Germany Hong Kong Hungary India Indonesia Ireland Italy Japan Kazakhstan Korea

Malaysia Mexico The Netherlands Peru Poland Portugal Puerto Rico Russia Singapore South Africa Spain Sweden Taiwan Thailand UK US Vietnam Venezuela

## **ERM's Hong Kong Office**

21/F Lincoln House Taikoo Place, 979 King's Road Island East, Hong Kong T: 2271 3000 F: 2723 5660

www.erm.com

