## ASB Biodiesel (Hong Kong) Limited

# Development of a Biodiesel Plant at Tseung Kwan O Industrial Estate

Monthly EM&A Report

(Version 1.0)

June 2010

Certified By	
(Environmental Team Leader)	

REMARKS:

The information supplied and contained within this report is, to the best of our knowledge, correct at the time of printing.

CINOTECH accepts no responsibility for changes made to this report by third parties

CINOTECH CONSULTANTS LTD Room 1710, Technology Park, 18 On Lai Street, Shatin, NT, Hong Kong Tel: (852) 2151 2083 Fax: (852) 3107 1388 Email: info@cinotech.com.hk

## TABLE OF CONTENTS

Page

EXECUTIVE SUMMARY	l
Introduction	l
Environmental Monitoring and Audit Works	
Environmental Licenses and Permits	Ĺ
Key Information in the Reporting Month	
Future Key Issues	2
1 INTRODUCTION	3
Background	3
Project Organizations	
Construction Programme	1
Summary of EM&A Requirements	5
2 ENVIRONMENTAL AUDIT	5
Site Audits	5
Status of Environmental Licensing and Permitting	5
Status of Waste Management	
Implementation Status of Environmental Mitigation Measures	
Summary of Complaint and Prosecution	3
3 FUTURE KEY ISSUES	)
Key Issues for the Coming Month	)
Construction Program for the Next Month	)
4 CONCLUSIONS AND RECOMMENDATIONS 10	)
Conclusions	)
Recommendations	)

## LIST OF TABLES

Table I	Summary Table for Key Information in the Reporting Month
Table 1.1	Key Project Contacts
Table 2.1	Summary of Environmental Licensing and Permit Status
Table 2.2	Observations and Recommendations of Site Audit

## LIST OF FIGURE

Figure 1.1 Site Layout Plan

## LIST OF APPENDICES

- Appendix A Site Audit Summary
- Appendix B Updated Environmental Mitigation Implementation Schedule
- Appendix C Waste Generation in the Reporting Month
- Appendix D Complaint Log
- Appendix E Construction Programme

## **EXECUTIVE SUMMARY**

#### Introduction

- 1. This is the 13<sup>th</sup> monthly Environmental Monitoring and Audit (EM&A) Report prepared by Cinotech Consultants Limited for Development of a Biodiesel Plant at Tseung Kwan O Industrial Estate". This report documents the findings of EM&A Works conducted in June 2010.
- 2. The major site activities undertaken in the reporting month included:
  - Structural Steel Works, including material transportation, assembling, welding jointing;
  - General site cleaning and tidying; and
  - Taking measures for preventing mosquito breeding.

#### **Environmental Monitoring and Audit Works**

3. Environmental monitoring and audit works for the Project were performed regularly as stipulated in the EM&A Manual and the results were checked and reviewed. The implementation of the environmental mitigation measures and environmental complaint handling procedures were also checked.

#### **Environmental Licenses and Permits**

4. Licenses/Permits granted to the Project include the Environmental Permit (EP) for the Project, An Environmental Permit No. EP-319/2009 and EP-319/2009/A was issued on 11 March 2009 and 7 April 2009 respectively. The contractor has applied for the Registration of Chemical Waste Producer (WPN-5113-839-C1186-15), Construction Noise Permit (GW-RE0561-09) and Wastewater Discharge License (WT00004508-2009).

## Key Information in the Reporting Month

5. Summary of key information in this reporting month is tabulated in Table I.

Table I	Summary Table for Key Information in the Reporting Month
	Summary ruste for ney mornation in the reporting stond

Event	Event Details		Action Taken	Status	Remark	
	Number	Nature	Action Taken	Status	Nelliark	
Complaint received	0		N/A	N/A		
Changes to the assumptions and key construction / operation activities recorded	0		N/A	N/A		
Status of submissions under EP	1	Monthly EM&A Report for May 2010	Submitted to EPD on 11 June 2010 (EP condition 4.2)	Verified by IEC		
Notifications of any summons & prosecutions	0		N/A	N/A		

## **Future Key Issues**

- 6. Major site activities for the coming month will include:
  - Tank Farm 2A remaining foundation and bund wall construction;
  - Possessing Building structural steelwork, tank installation and painting;
  - Administration Building concrete frame construction;
  - Fat Pad Fabrication concrete frame construction; and
  - Site Investigation for Jetty Construction.
- 7. The future environmental concerns are air quality, waste management and surface runoff from construction works.

## 1 INTRODUCTION

## Background

- 1.1 Development of a Biodiesel Plant at Tseung Kwan O Industrial Estate is a Designated Project (hereafter referred to as "the Project") under the Environmental Impact Assessment Ordinance (Cap. 449). A study of environmental impact assessment (EIA) was undertaken to consider the key issues of air quality, noise, water quality, ecological and identify possible mitigation measures associated with the works. An EIA Report was approved by the Environmental Protection Department (EPD) on 26 February 2009.
- 1.2 The project is to construct and operate a 100,000 tonnes per annum biodiesel plant at Tseung Kwan O Industrial Estate. The plant will use a multi-feedstock which consists of waste cooking oil (WCO), oil and grease recovered from grease trap waste (GTW), Palm Fatty Acid Distillate (PFAD) and animal fats. The proposed biodiesel plant not only offers a convenient recycling outlet for GTW and WCO but also converts the oil and grease recovered from these wastes into useful products. The Project also offers a cleaner alternative to diesel fuel to the Hong Kong market. The main processes include the followings:-
  - Construction of feedstock reception and storage facilities, and offices;
  - Construction of a grease trap waste pre-treatment facility (with a designated treatment capacity of about 200,000 tonnes per annum);
  - Construction of a wastewater treatment plant (with a designed treatment capacity of about 170,000 m3 per annum);
  - Installation of biodiesel production and glycerine purification system;
  - Construction of product storage and ancillary facilities;
  - Pretreatment of grease trap waste;
  - Treatment of wastewater generated from feedstock pre-treatment and glycerine dewatering process, and filtrates from dewatering process of sludge treatment;
  - Transesterification of feedstock with alcohol-catalyst; and
  - Purification of biodiesel.
  - 1.3 The general layout of the Project is shown in **Figure 1.1.**
  - 1.4 Layout plan of tank farm **2A**, **2B to 2E** is revised and a report is made by Environmental Resources Management (ERM) regarding such change. The report concluded that no deviation is found from the approved EIA report.
  - 1.5 An Environmental Permit (EP) No. EP-319/2009 and EP-319/2009/A was issued on 11 March 2009 and 7 April 2009 respectively for Development of a Biodiesel Plant at Tseung Kwan O Industrial Estate to ASB Biodiesel (Hong Kong) Limited as the Permit Holder.
  - 1.6 Cinotech Consultants Limited was commissioned by ASB Biodiesel (Hong Kong) Limited to undertake the Environmental Monitoring and Audit (EM&A) works for the Project. China Harbour Engineering Company Limited is the Managing Contractor of

the Project. This is the 13<sup>th</sup> Monthly EM&A report summarizing the EM&A works for the Project in June 2010.

## **Project Organizations**

- 1.7 Different parties with different levels of involvement in the project organization include:
  - Project Proponent ASB Biodiesel (Hong Kong) Limited
  - Contractor China Harbour Engineering Company Limited (CHEC)
  - Environmental Team (ET) Cinotech Consultants Limited
  - Independent Environmental Checker (IEC) Mannings (Asia) Consultants Ltd.
- 1.8 The responsibilities of respective parties are detailed in Section 1.10 of the Final EM&A Manual of the Project.
- 1.9 The key contacts of the Project are shown in Table 1.1.

Party	Role	Name	Position	Phone No.	Fax No.	
ASB Permit Holder		Mr. Eddie Chung	Project Manager	9189 8118	37411661	
		Dr. HF Chan	ET Leader	2151 2088		
Cinotech Environmental Team		Ms. Ivy Tam	Project Coordinator	2151 2090	3107 1388	
		Mr. Gary Lau	Audit Team Leader	2151 2098		
Mannings Independent Environmental Checker		Mr. Mark Cheung	Independent Environmental Checker	3168 2028	2168 2022	
		Mr. Gavin Kwok	Assistant to Independent Environmental Checker	3168 2028	3168 2022	
CHEC	Contractor	Mr. Stephen Tse	Project Manager	8106 1848	2623 9226	
CHEC Contractor		Mr. Matthew Cheung	Environmental Officer	9038 1803	2023 9220	

Table 1.1Key Project Contacts

## **Construction Programme**

- 1.10 The site activities undertaken in the reporting month were:
  - Structural Steel Works, including material transportation, assembling, welding jointing;
  - General site cleaning and tidying; and
  - Taking measures for preventing mosquito breeding.

#### Summary of EM&A Requirements

- 1.11 The EM&A requirements are described in the following sections, including:
  - Environmental mitigation measures, as recommended in the project EIA study final report; and
  - Environmental requirements in contract documents.
- 1.12 The advice on the implementation status of environmental protection and pollution control/mitigation measures is summarized in Section 3 of this report.

## 2 ENVIRONMENTAL AUDIT

#### **Site Audits**

- 2.1 Site audit was carried out by ET on monthly basis to monitor the timely implementation of proper environmental management practices and mitigation measures in the Project site. The summaries of site audits are attached in **Appendix A**.
- 2.2 Site audit was conducted on 21<sup>st</sup> June 2010 by ET in the reporting month. No non-compliance was observed during the site audits.

## Status of Environmental Licensing and Permitting

2.3 All permits/licenses obtained for the Project are summarized in **Table 2.1**.

#### **Status of Waste Management**

2.4 No Construction and Demolition (C&D) Waste and no Chemical Waste are generated in the reporting month. The quantities of waste generated in this reporting month are summarized in **Appendix C**.

#### **Implementation Status of Environmental Mitigation Measures**

2.5 According to the EIA Study Report, Environmental Permit and the EM&A Manual of the Project, the mitigation measures detailed in the documents are recommended to be implemented during the construction phase. An updated summary of the EMIS is provided in **Appendix B**.

Derry 4 / Lie and No	Valid PeriodFromTo			Status	
Permit / License No.			Details		
<b>Environmental Permit (EP)</b>					
EP-319/2009/A	07/04/2009	N/A	Construction and operation of	Valid	
			(i) a biochemical plant with a storage capacity of more than 500 tonnes and in which substances are processed and produced;		
			(ii) a storage, transfer and tran- shipment of oil facility with a storage capacity of not less than 1,000 tonnes; and		
			<ul><li>(iii) a dangerous goods godown with a storage capacity exceeding 500 tonnes</li></ul>		
Registration of Chemical Was	te Producer		11		
WPN-5113-839-C1186-15	12/06/2009	-	Spent Lubrication oil.	Valid	
Construction Noise Permit (C	NP)				
GW-RE0561-09	10/12/2009	26.11.2010	Use of Powered Mechanical Equipment during 0000-2400 hours on general holidays (including Sundays), 0000-0700 hours on any day not being a general holiday.	Valid	
Wastewater Discharge Licens	e				
WT00004508-2009	07/09/2009	-	-	Valid	

Table 2.1	Summary of Environmental Licensing and Permit Status
-----------	--

2.6 During site inspections in the reporting month, no non-conformance was identified. The observations and recommendations made during the audit sessions are summarized in Table 2.2.

 Table 2.2
 Observations and Recommendations of Site Audit

Parameters	Date	<b>Observations and Recommendations</b>	Follow-up
Water Quality	21-06-10	Reminder Improperly stored and labelled chemical containers were observed. The Contractor was reminded to provide proper storage and label for them.	Rectification photo was received from The Contractor on 9/07/2010.

#### **Summary of Complaint and Prosecution**

- 2.7 No environmental related complaint, prosecution or notification of summons was received in the reporting month.
- 2.8 There was no environmental complaint, prosecution or notification of summons received since the Project commencement. The Complaint Log is attached in Appendix D.

## **3** FUTURE KEY ISSUES

## Key Issues for the Coming Month

- 3.1 Key issues to be considered in the coming month include:
  - Noise from operation of the equipment and machinery on-site;
  - Effluent discharge generated from surface runoff;
  - Dust generated from excavation works and stockpile of dusty materials;
  - Maintenance of de-silting facilities and drainage system, such as U-channels;
  - Storage of chemicals/fuel and chemical waste/waste oil on site;
  - Accumulation of stagnant water in the site areas; and
  - Accumulation of C&D waste and general waste on site.

#### **Construction Program for the Next Month**

- 3.2 A tentative construction programme is provided in **Appendix E**. The major construction activities in the coming month will include:
  - Tank Farm 2A remaining foundation and bund wall construction;
  - Possessing Building structural steelwork, tank installation and painting;
  - Administration Building concrete frame construction;
  - Fat Pad Fabrication concrete frame construction; and
  - Site Investigation for Jetty Construction.

## 4 CONCLUSIONS AND RECOMMENDATIONS

#### Conclusions

- 4.1 Environmental audit works were conducted in the reporting month. Site inspections were conducted on a monthly basis. The results of were reviewed and checked.
- 4.2 There was no environmental complaint, prosecution or notification of summons received.

#### Recommendations

4.3 According to the environmental audit performed in the reporting month, the following recommendations were made:

#### Water Impact

- To identify any wastewater discharges from site.
- To ensure properly maintenance for de-silting facilities.
- To clear the silt and sediment in the sedimentation tanks.
- To review the capacity of de-silting facilities for discharge.
- To divert all the water generated from construction site to de-silting facilities with enough handling capacity before discharge.
- To avoid accumulation of stagnant and ponding water on site.
- To clear the drainage channel regularly to prevent blockage.

#### **Dust Impact**

- To remove fugitive dusty material on the haul road periodically.
- Excavated dusty materials or stockpile of dusty materials should be covered by impervious sheeting, or sprayed with water so as to maintain entire surface wet.


#### Noise Impact

- To space out noisy equipment and position as far away as possible from sensitive receivers.
- To inspect the noise sources inside the site.

#### Waste / Chemical Management

- To provide proper rubbish bins / skips for waste collection.
- To provide proper storage area for oil container on site.
- To avoid and check for any accumulation of waste materials or rubbish on site.
- To avoid any discharge or accidental spillage of chemical waste or oil directly from the equipment.

FIGURES

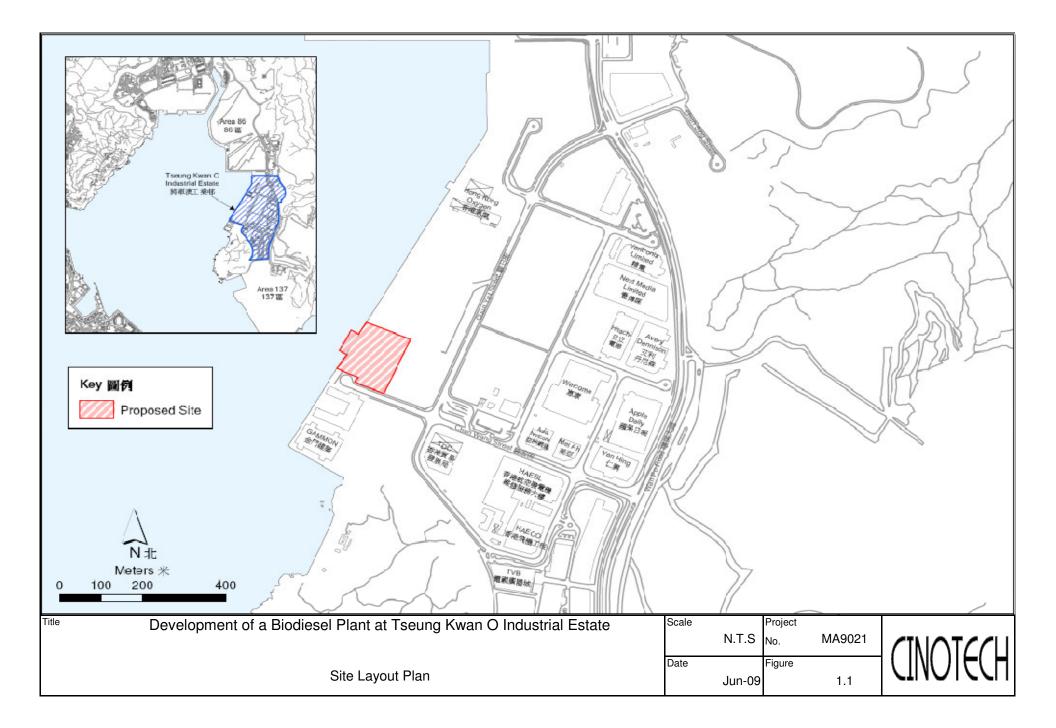

APPENDIX A SITE AUDIT SUMMARY

## Monthly Site Inspection Record Summary

Inspection Information	
Checklist Reference Number	000621
Date	21 June 2010 (Monday)
Time	15:30 - 16:30

Ref. No.	Non-Compliance	Related Item No.	
-	None	-	

Ref. No.	Remarks/Observations	Related Item No.
	A. Water Quality	
	<ul> <li>No environmental deficiency was identified during site inspection.</li> </ul>	
	B. Air Quality	
	No environmental deficiency was identified during site inspection.	
	C. Noise	
	<ul> <li>No environmental deficiency was identified during site inspection.</li> </ul>	
	D. Waste / Chemical Management	
	Reminder	
000621-R01	• Improperly stored and labeled chemical containers were observed. The	E 2i
000021-1001	Contractor was reminded to provide proper storage and label for them.	
	contractor was reminiated to provide proper storage and labor for them.	
	E. Permit / Licenses	
	• No environmental deficiency was identified during site inspection.	
	F. Reminders	
	• No environmental deficiency was identified during site inspection.	
	G. Others	
	<ul> <li>Follow-up on previous audit section (Ref. No.:000524), all environmental</li> </ul>	
	deficiencies were improved/rectified by contractor.	

	Name	Signature	Date				
Recorded by	Gary Lau	from to.	24 June 2010				
Checked by	Dr. HF Chan	the	24 June 2010				

APPENDIX B UPDATED ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

Types of Impacts	Mitigation Measures	Status
	• Dust control measures such as water spaying on roads and dusty areas, covering of lorries by impervious sheets and controlling of the falling height of fill materials will be implemented;	۸
	• Effective dust screens, sheeting or netting will be provided to enclose the scaffolding from the ground level of the facility during the building construction;	N/A
	• All debris and materials will be covered or stored in a sheltered debris collection area;	^
Construction	• Hoarding from ground level will be provided along the entire length of the site boundary except for a site entrance or exit;	Λ
Dust	• Every stockpile of dusty materials will be covered entirely by impermeable sheeting or placed in an area sheltered on the top	
	and the 3 sides;	^
	<ul> <li>Regular maintenance and checking of the diesel powered mechanical equipment will be adopted to avoid any black smoke emissions and to minimize gaseous emissions.</li> </ul>	
	<ul> <li>Monthly site audits will be conducted to ensure the implementation of suitable dust control measures and good site practices.</li> </ul>	^
	• Wohning she addits will be conducted to ensure the implementation of suitable dust control measures and good she practices.	^
	• Only well-maintained plant will be operated on-site and plant will be serviced regularly during the construction program;	٨
	<ul> <li>Silencers or mufflers on construction equipment will be utilized and will be properly maintained during the construction program;</li> </ul>	^
	<ul> <li>Mobile plant, if any, will be sited as far from NSRs as possible;</li> </ul>	^
Construction	• Machines and plant (such as trucks) that may be in intermittent use will be shut down between work periods or will be throttled down to a minimum;	٨
Noise	• Plant known to emit noise strongly in one direction will, wherever possible, be orientated so that the noise is directed away from the nearby NSRs; and	^
	• Material stockpiles and other structures will be effectively utilised, wherever practicable, in screening noise from onsite construction activities.	^

#### Appendix B - Summary of Environmental Mitigation Implementation Schedule (Construction Phase)

Types of Impacts	Mitigation Measures	Status
	<ul> <li><u>Piling Activities</u></li> <li>Silt curtain will be installed around the marine piling area to contain any suspended mud and sediments generated during the piling works. Silt removal facilities such as silt traps or sedimentation facilities will be provided to remove silt particles from groundwater (if pumping is required) to meet the requirements of the TM standard under the WPCO. The design of silt removal facilities will be based on the guidelines provided in ProPECC PN 1/94. All drainage facilities and erosion and sediment control structures will be inspected monthly and maintained to ensure proper and efficient operation at all times and particularly during rainstorms.</li> <li><u>Construction Site Run-off and Drainage</u></li> </ul>	N/A
Water Quality	<ul> <li>Silt removal facilities such as silt traps or sedimentation facilities will be provided to remove silt particles from runoff to meet the requirements of the TM standard under the WPCO. The design of silt removal facilities will be based on the guidelines provided in ProPECC PN 1/94. All drainage facilities and erosion and sediment control structures will be inspected monthly and maintained to ensure proper and efficient operation at all times and particularly during rainstorms.</li> <li>Careful programming of the works to minimise surface excavations for the construction works during the wet season. If</li> </ul>	^
	<ul> <li>excavation of soil cannot be avoided during the wet season, exposed slope surfaces will be covered by a tarpaulin or other means. Other measures that need to be implemented before, during, and after rainstorms are summarised in ProPECC PN 1/94.</li> <li>Exposed soil surfaces will be protected by paving or fill material as soon as possible to reduce the potential of soil erosion.</li> <li>Open stockpiles of construction materials or construction wastes on-site of more than 50m3 will be covered with tarpaulin or similar fabric during rainstorms. These materials will not be placed near the seawall area.</li> </ul>	^ ^
	<u>General Construction Activities</u>	
	<ul> <li>Debris and refuse generated on-site will be collected, handled and disposed of properly to avoid entering the nearby water sensitive receivers (WSRs). Stockpiles of cement and other construction materials will be kept covered when not being used.</li> <li>Oils and fuels will only be used and stored in designated areas which have pollution prevention facilities. All fuel tanks and storage areas will be provided with locks and be sited on sealed areas, within bunds of a capacity equal to 110% of the storage capacity of the largest tank. The bund will be drained of rainwater after a rain event.</li> </ul>	^

Types of Impacts	Mitigation Measures	Status
	Sewage generated from On-site Workforce	
	<ul> <li>Temporary sanitary facilities, such as portable chemical toilets, will be provided on-site. A specialised contractor will be responsible for regular collection and appropriate disposal of the sewage and maintenance of these facilities.</li> <li>Monthly site inspections will be carried out during construction to ensure that the mitigation measures listed above are properly implemented. The site audit frequency will be increased to weekly intervals during the piling works.</li> </ul>	N/A ^
Ecology	• Mitigation measures for minimising water quality impacts are presented in detail above. These measures will be properly implemented and good construction practices will be adopted to minimise potential adverse impacts to marine ecological resources.	۸

Remarks: ^

- Compliance of mitigation measure; X Non-compliance of mitigation measure;
   N/A Not Applicable at this stage; Non-compliance but rectified by the contractor;
   Recommendation was made during site audit but improved/rectified by the contractor;
   Mon-compliance but rectified/improved by the contractor and awaiting IEC's further comment.

APPENDIX C WASTE GENERATION IN THE REPORTING MONTH

## Biodiesel Plant Tseung Kwan O Project Reporting Month: <u>June 2010</u>

	Actual	Quantities of Iner	rt C&D Materia	lls Generated / Im	ported (in '00	0 m <sup>3</sup> )	Actua	ll Quantities of Ot	her C&D Materials	/ Wastes Gen	erated
Month January February March April May June	Total Quantities Generated [a+b+c+d]	Broken Concrete (including rock for recycling into aggregates) ( a )	Reused in the Contract ( b )	Reused in Other Projects ( c )	Disposed as Public Fill ( d )	Imported C&D Material	Metal (in '000 kg)	Paper/ cardboard packaging (in '000kg)	Plastics (bottles/containers, plastic sheets/ foams from package material) (in '000kg)	Chemical Waste (in '000kg)	Others (e.g. General Refuse etc.) (in '000m3)
January	1.3	0	0	0	1.3	0	0	0.05	0.01	0	0.02
February	0	0	0	0	0	0	0	0.05	0.01	0	0.02
March	7	0	0	0	7	0	0	0.05	0.01	0	0.02
April	0	0	0	0	0	0	0	0.01	0.01	0	0.02
May	0	0	0	0	0	0	0	0.01	0.01	0	0.02
June	0	0	0	0	0	0	0	0.02	0.01	0	0.02
Half-year Total	8.3	0	0	0	8.3	0	0	0.19	0.06	0	0.12
July											
August											
September											
October											
November											
December											
Yearly Total											

APPENDIX D COMPLAINT LOG

## APPENDIX D - COMPLAINT LOG

## **Reporting Month**: June 2010

Log Ref.	Location	Received Date	Details of Complaint	Investigation/Mitigation Action	Status
N/A	N/A	N/A	N/A	N/A	N/A

Remarks: No environmental complaint was received in the reporting month.

APPENDIX E CONSTRUCTION PROGRAMME

File Name:C250-EP-R02\_(July 2010)\_BC.mpp

# Proposed Bio-Diesel Plant at T.K.O.T. Lot No. 39 S.Q. ss.1, ss.2 and Ext. thereto Chun Wang Street, TKO Ind. Estate, Kln

#### **3** Month Construction Works Programme

		sk Name	Duration	Start	Finish	0 FebMarAp		T1 A	- C O -	4 - D	2011	1-1 1-1 4		( T1	A	_
+	6 C	onstruction Works	879 days	01/05/09	26/09/11	FedmarAp	r a jun	Jui Au	<u>seploc</u>		Jan Fe	<u>bMarA</u>	pr a j	unjui	Augsep	0
	6.2	1A - Administration Building	353 days	27/04/10	14/04/11							<u> </u>	•			 
6	5.2.3	Superstructure Construction Works	114 days	02/07/10	23/10/10		02/07			23/10						 
6	5.2.6	Delivery of Transformer	180 days	27/04/10	23/10/10	27/04				23/10						 
6.	2.10	Lift Procurement	180 days	09/07/10	04/01/11		09/07				04/01	1				 
7	6.3	1B - Process Building	349 days	03/04/10	17/03/11											 
6	5.3.1	Superstructure Construction Works	150 days	03/04/10	30/08/10	03/04 🚍			30/08							 
) 6	5.3.2	BDI Process Equipment Installation Works	84 days	17/04/10	09/07/10	17/04		09/0	1							 
1 6	5.3.4	Procurement of Pipe Materials	60 days	02/07/10	30/08/10		02/07		30/08							 
3 6	5.3.6	BDI Piping, Electrical, Insulation & Instrumentation Works	175 days	31/08/10	21/02/11			31/08				21/02	,			 
5 6	5.3.8	Building Service Installation Works	90 days	10/09/10	08/12/10			10/0		0	8/12					 
7 6.	3.10	Cladding Design BD Submission and Consent	90 days	25/06/10	22/09/10		25/06		22	109						 
8 6.	3.11	Cladding Works	62 days	23/09/10	23/11/10			23/	09 드	23/	11					 
3	6.4	1B - Fat Preparation Building	295 days	29/06/10	20/04/11		Ţ					 	•			 
6 6	5.4.3	RC Superstructure Construction Works	78 days	18/07/10	03/10/10		18/07	<b>—</b>	0	3/10						 
2 6	5.4.9	Procurement of Pipe Materials	60 days	02/07/10	30/08/10		02/07		30/08							 
1	6.5	1B - Boiler Room	287 days	04/06/10	17/03/11			_								 
4 6	5.5.3	RC Superstructure Construction Works	75 days	07/07/10	19/09/10		07/07		<b>1</b> 9/	09		+				 
9 6	5.5.8	BDI Boiler Room & Utility Equipment Installation Works	70 days	20/09/10	28/11/10			20/	09 드	28	/11					 
1 6.:	5.10	Procurement of Pipe Materials	60 days	02/07/10	30/08/10		02/07		30/08	+		+				 

<u>(HÈ</u>C

# Proposed Bio-Diesel Plant at T.K.O.T. Lot No. 39 S.Q. ss.1, ss.2 and Ext. thereto Chun Wang Street, TKO Ind. Estate, Kln

#### **3** Month Construction Works Programme

Section Ta	isk Name	Duration	Start	Finish	0			<u> </u>			)11	,					
					FebMarApı	r a Jun			ct o E	Dec Ja			r a J	un Jul	AugS	eplO	<u>ct o</u>
6.5.17	Procurement of Chimney	139 days	12/09/10	28/01/11			12/0	9			28/0	)1					
6.6	2A - Tank Farm	263 days	02/07/10	21/03/11		<b>_</b>				·····		•					
6.6.3	Re- commence Foundation Construction incl. Pipe Rack RC Support Wall	114 days	22/07/10	12/11/10		22/0	_		<b>—</b> 12	/11							
6.6.6	Fabrication of Steel Tanks Off-site	45 days	12/07/10	25/08/10		12/07	_	25/08									
6.6.7	Tank Erection Works & Pipe Rack Steel Works	114 days	26/08/10	17/12/10			.6/08	_		17/	12						
6.7	2A - GTW Separation Room (w/ Concrete Room) & Pump Yard	383 days	23/06/10	10/07/11		•								-			
6.7.12	Paques GTW Equipment Delivery	180 days	14/08/10	09/02/11		1	/08 🕻				09	/02					
6.8	2B-E Tank Farm	261 days	02/07/10	19/03/11		•						•					
6.8.1	Containment/Bund Wall Construction	78 days	16/07/10	01/10/10		16/07	–		01/10								
6.8.3	Fabrication of Steel Tanks Off-site	45 days	12/07/10	25/08/10		12/07		25/08									
6.9	3 - Waste Water Treatment Plant	315 days	25/06/10	05/05/11		•							•				
6.9.2	Foundation Construction	39 days	28/08/10	05/10/10			28/08		05/10								
6.9.5	IC Reactor Structural Support Design Amendment Approval	28 days	25/06/10	22/07/10		25/06	22	/07									
6.9.6	IC Reactor Fabrication off-site	178 days	23/07/10	16/01/11		23/0	_				16/01						
6.9.11	Paques WWTP Equipment Delivery	180 days	10/07/10	05/01/11		10/07				- (	)5/01						
6.10	4A - Jetty	448 days	05/07/10	26/09/11		•	_										
6.10.2	SI and Founding Level determination (Includind BD Submission)	90 days	03/08/10	31/10/10		03/	98 드		31/1	0							
6.12	External Works	318 days	13/06/10	27/04/11		-		<u></u>	<u></u>	<u></u>		—	•				
		30 days	18/09/10	17/10/10				09 드									
	6.6.3 6.6.6 6.6.7 6.7 6.7 6.7 6.7 6.8 6.8.1 6.8.3 6.8.3 6.9 6.9.2 6.9.5 6.9.5 6.9.6 6.9.11 6.9.11	6.62A - Tank Farm6.6.3Re- commence Foundation Construction incl. Pipe Rack RC Support Wall6.6.4Fabrication of Steel Tanks Off-site6.6.7Tank Erection Works & Pipe Rack Steel Works6.7 <b>2A - GTW Separation Room (w/ Concrete Room) &amp; Pump Yard</b> 6.7.12Paques GTW Equipment Delivery6.8 <b>2B-E Tank Farm</b> 6.8.1Containment/Bund Wall Construction6.8.3Fabrication of Steel Tanks Off-site6.9 <b>3 - Waste Water Treatment Plant</b> 6.9.2Foundation Construction6.9.3IC Reactor Structural Support Design Amendment Approval6.9.4 <b>A - Jetty</b> 6.10.2SI and Founding Level determination (Includind BD Submission)	6.62A - Tank Farm263 days6.6.3Re- commence Foundation Construction incl. Pipe Rack RC Support Wall114 days6.6.4Fabrication of Steel Tanks Off-site45 days6.6.7Tank Erection Works & Pipe Rack Steel Works114 days6.7 <b>2A - GTW Separation Room (w/ Concrete Room) &amp; Pump Yard383 days</b> 6.7.12Paques GTW Equipment Delivery180 days6.8.1Containment/Bund Wall Construction78 days6.8.3Fabrication of Steel Tanks Off-site45 days6.8.4Containment/Bund Wall Construction78 days6.8.5Fabrication of Steel Tanks Off-site45 days6.8.6Gu containment/Bund Wall Construction315 days6.9.7J. Waste Water Treatment Plant315 days6.9.8IC Reactor Structural Support Design Amendment Approval28 days6.9.9IC Reactor Fabrication off-site178 days6.9.10 <b>4A - Jetty180 days</b> 6.10.2SI and Founding Level determination (Includind BD Submission)90 days	A. Containment/Bund Wall Construction263 days02/07/106.6.3Re- commence Foundation Construction incl. Pipe Rack RC Support Wall114 days22/07/106.6.4Fabrication of Steel Tanks Off-site45 days12/07/106.6.7Tank Erection Works & Pipe Rack Steel Works114 days26/08/106.7ZA - GTW Separation Room (w/ Concrete Room) & Pump Yard383 days23/06/106.7.12Paques GTW Equipment Delivery180 days14/08/106.8.3Containment/Bund Wall Construction78 days12/07/106.8.3Fabrication of Steel Tanks Off-site45 days12/07/106.8.3Fabrication of Steel Tanks Off-site45 days12/07/106.9.4Outdation Construction78 days25/06/106.9.5IC Reactor Structural Support Design Amendment Approval28 days23/07/106.9.6IC Reactor Fabrication of f-site178 days20/07/106.9.1Paques WWTP Equipment Delivery180 days10/07/106.9.2SI and Founding Level determination (Includind BD Submission)90 days03/08/10	A. Tank Farm         263 days         02/07/10         21/03/11           6.6.6         Re- commence Foundation Construction incl. Pipe Rack RC Support Wall         114 days         22/07/10         25/08/10           6.6.6         Fabrication of Steel Tanks Off-site         45 days         12/07/10         25/08/10           6.6.7         Tank Erection Works & Pipe Rack Steel Works         114 days         26/08/10         17/12/10           6.7         Tank Erection Works & Pipe Rack Steel Works         114 days         26/08/10         17/12/10           6.7         Tank Erection Works & Pipe Rack Steel Works         118 days         23/06/10         10/07/11           6.7.1         Paques GTW Equipment Delivery         180 days         14/08/10         09/02/11           6.8.3         Containment/Bund Wall Construction         78 days         16/07/10         01/10/10           6.8.3         Fabrication of Steel Tanks Off-site         45 days         12/07/10         25/08/10           6.9.2         Foundation Construction         39 days         28/08/10         05/10/10           6.9.3         Fabrication off-site         315 days         25/06/10         22/07/10           6.9.4         IC Reactor Structural Support Design Amendment Approval         28 days         28/08/10         05/1	6.5.17       Procurement of Chinney       139 days       12/09/10       28/01/11       28/01/11         6.6       2A - Tank Farm       263 days       02/07/10       21/03/11       2         6.6.3       Re- commence Foundation Construction incl. Pipe Rack RC Support Wall       114 days       22/07/10       12/11/10       2         6.6.6       Fabrication of Steel Tanks Off-site       45 days       12/07/10       25/08/10       1         6.6.7       Tank Erection Works & Pipe Rack Steel Works       1114 days       26/08/10       17/12/10       2         6.7       2A - GTW Separation Room (w/ Concrete Room) & Pump Yard       383 days       23/06/10       10/07/11       2         6.7.12       Paques GTW Equipment Delivery       180 days       14/08/10       09/02/11       2         6.8.3       Containment/Bund Wall Construction       78 days       16/07/10       01/10/10       2         6.8.3       Fabrication of Steel Tanks Off-site       45 days       12/07/10       25/08/10       2         6.9.3       Foundation Construction       39 days       28/08/10       05/10/10       2       2         6.9.4       Geactor Structural Support Design Amendment Approval       28 days       25/06/10       22/07/10       2	6.5.17       Procurement of Chimney       139 days       12/09/10       28/01/11       1         6.6       2A - Tank Farm       263 day       02/07/10       21/03/11       2       22/07         6.6.3       Re- commence Foundation Construction incl. Pipe Rack RC Support Wall       114 days       22/07/10       12/11/10       2       22/07         6.6.6       Fabrication of Steel Tanks Off-site       45 days       12/07/10       25/08/10       12/07         6.6.7       Tank Erection Works & Pipe Rack Steel Works       114 days       26/08/10       10/07/11       1	6.5.17Procurement of Chimney139 days12/09/1028/01/11112/06.62A - Tank Farm263 days02/07/1021/03/11222/07/1021/03/1126.6.3Re- commence Foundation Construction incl. Pipe Rack RC Support Wall114 days22/07/1012/17/10222/07/1012/17/10222/07/1012/17/10222/07/1012/17/101222/07/1012/17/101222666.6.5Fabrication of Steel Tanks Off-site114 days22/07/1012/07/1025/08/1017/12/1026666.6.7CAA - GTW Separation Room (w/ Concrete Room) & Pump Yard383 days23/06/1010/07/111666.7.12Paques GTW Equipment Delivery180 days14/08/1009/02/11116/0766.8.3Containment/Bund Wall Construction7/8 days12/07/1025/08/1001/10101666.9.3Fabrication of Steel Tanks Off-site315 days25/06/1005/07/10012/0766.9.3Foundation Construction339 days28/08/1005/07/10025/08/102226.9.4Foundation Construction28/08/1025/06/1005/07/102222222222222222222222222222<	6.5.17Procurement of Chimney139 days1209/1028/01/11120012006.62A - Tank Farm263 day0207/1012/11/1022207/106.6.3Re- commence Foundation Construction incl. Pipe Rack RC Support Wall1114 days22/07/1012/11/10222/08/106.6.6Fabrication of Steel Tanks Off-site45 days12/07/1025/08/1012/12/10225/08/1012/12/10225/08/1012/12/10225/08/1012/12/10225/08/1012/12/10225/08/1012/12/10225/08/1012/12/10225/08/1012/12/10222 <t< td=""><td>6.5.17       Procurement of Chinmey       139 days       12/09/10       28/01/11       12/09</td><td>6.5.17       Procurement of Chimney       139 days       12/09/10       28/01/11       12/09/10       21/03/11       12/09/10       21/03/11       12/09/10       21/03/11       12/09/10       21/03/11       12/09/10       21/03/11       12/09/10       21/03/11       12/09/10       21/03/11       12/09/10       21/03/11       12/07/10       21/01       12/07</td><td>6.5.17       Procurement of Chimney       139 days       12/09/10       28/01/11       12/09       28/01/11       12/09       28/01/11       12/09       28/01/11       12/09       28/01/11       12/01       12</td><td>6.5.17Procurement of Chinney139 days1209/1028/01/11100100028/016.62A - Tank Farm263 days02/07/1021/03/1122228/016.6.3Re-commence Foundation Construction incl. Pipe Rack RC Support Wall1114 days22/07/1025/08/1012/07225/0816.6.4Fabrication of Steel Tanks Off-site45 days12/07/1025/08/1012/07225/08116.6.7Tank Erection Works &amp; Pipe Rack Steel Works114 days26/08/1010/07/11222116.7.12Paques GTW Separation Room (w/ Concrete Room) &amp; Pump Yard383 days12/07/1010/07/11122006.8.1Containment/Bund Wall Construction180 days14/08/1009/02/11<t< td=""><td>6.5.17Procurement of Chinney139 days1209/1028/01/1110028/01/112</td><td>6.5.17       Procurement of Chinney       139 days       1209/10       2801/11       1206       2801/1       1206       2801/1       1206       2801/1       1206       2801/1       1206       2801/1       1206       2801/1       1206       2801/1       1206       2801/1       1206       2801/1       1207       2007       1207</td></t<><td>6.5.17       Procurement of Chinney       139 day       1209/10       2801/11       1206       2801/11       1206       2801/11       1206       2801/11       1206       2801/11       1206       2801/11       1206       2801/11       1206       2801/11       1206       2801/11       1206       2801/11       1206       2801/11       1207       2801/11</td><td>6.6       2A - Tank Farm       263 days       92/07/10       21/03/11       2000 1000000000000000000000000000000000</td></td></t<>	6.5.17       Procurement of Chinmey       139 days       12/09/10       28/01/11       12/09	6.5.17       Procurement of Chimney       139 days       12/09/10       28/01/11       12/09/10       21/03/11       12/09/10       21/03/11       12/09/10       21/03/11       12/09/10       21/03/11       12/09/10       21/03/11       12/09/10       21/03/11       12/09/10       21/03/11       12/09/10       21/03/11       12/07/10       21/01       12/07	6.5.17       Procurement of Chimney       139 days       12/09/10       28/01/11       12/09       28/01/11       12/09       28/01/11       12/09       28/01/11       12/09       28/01/11       12/01       12	6.5.17Procurement of Chinney139 days1209/1028/01/11100100028/016.62A - Tank Farm263 days02/07/1021/03/1122228/016.6.3Re-commence Foundation Construction incl. Pipe Rack RC Support Wall1114 days22/07/1025/08/1012/07225/0816.6.4Fabrication of Steel Tanks Off-site45 days12/07/1025/08/1012/07225/08116.6.7Tank Erection Works & Pipe Rack Steel Works114 days26/08/1010/07/11222116.7.12Paques GTW Separation Room (w/ Concrete Room) & Pump Yard383 days12/07/1010/07/11122006.8.1Containment/Bund Wall Construction180 days14/08/1009/02/11 <t< td=""><td>6.5.17Procurement of Chinney139 days1209/1028/01/1110028/01/112</td><td>6.5.17       Procurement of Chinney       139 days       1209/10       2801/11       1206       2801/1       1206       2801/1       1206       2801/1       1206       2801/1       1206       2801/1       1206       2801/1       1206       2801/1       1206       2801/1       1206       2801/1       1207       2007       1207</td></t<> <td>6.5.17       Procurement of Chinney       139 day       1209/10       2801/11       1206       2801/11       1206       2801/11       1206       2801/11       1206       2801/11       1206       2801/11       1206       2801/11       1206       2801/11       1206       2801/11       1206       2801/11       1206       2801/11       1207       2801/11</td> <td>6.6       2A - Tank Farm       263 days       92/07/10       21/03/11       2000 1000000000000000000000000000000000</td>	6.5.17Procurement of Chinney139 days1209/1028/01/1110028/01/112	6.5.17       Procurement of Chinney       139 days       1209/10       2801/11       1206       2801/1       1206       2801/1       1206       2801/1       1206       2801/1       1206       2801/1       1206       2801/1       1206       2801/1       1206       2801/1       1206       2801/1       1207       2007       1207	6.5.17       Procurement of Chinney       139 day       1209/10       2801/11       1206       2801/11       1206       2801/11       1206       2801/11       1206       2801/11       1206       2801/11       1206       2801/11       1206       2801/11       1206       2801/11       1206       2801/11       1206       2801/11       1207       2801/11	6.6       2A - Tank Farm       263 days       92/07/10       21/03/11       2000 1000000000000000000000000000000000