


# ASB Biodiesel (Hong Kong) Limited

## Development of a Biodiesel Plant at Tseung Kwan O Industrial Estate

Monthly EM&A Report

October 2010

(Version 1.0)

Certified By   
(Environmental Team Leader)

**REMARKS:**

The information supplied and contained within this report is, to the best of our knowledge, correct at the time of printing.

CINOTECH accepts no responsibility for changes made to this report by third parties

**CINOTECH CONSULTANTS LTD**

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Tel: (852) 2151 2083 Fax: (852) 3107 1388

Email: [info@cinotech.com.hk](mailto:info@cinotech.com.hk)

# TABLE OF CONTENTS

	Page
<b>EXECUTIVE SUMMARY .....</b>	<b>1</b>
Introduction .....	1
Environmental Monitoring and Audit Works .....	1
Environmental Licenses and Permits .....	1
Key Information in the Reporting Month .....	1
Future Key Issues .....	2
<b>1 INTRODUCTION .....</b>	<b>3</b>
Background .....	3
Project Organizations .....	4
Construction Programme.....	4
Summary of EM&A Requirements .....	4
<b>2 ENVIRONMENTAL AUDIT.....</b>	<b>5</b>
Site Audits .....	5
Status of Environmental Licensing and Permitting.....	5
Status of Waste Management .....	5
Implementation Status of Environmental Mitigation Measures .....	5
Summary of Complaint and Prosecution.....	7
<b>3 FUTURE KEY ISSUES .....</b>	<b>8</b>
Key Issues for the Coming Month .....	8
Construction Program for the Next Month .....	8
<b>4 CONCLUSIONS AND RECOMMENDATIONS .....</b>	<b>9</b>
Conclusions .....	9
Recommendations .....	9

## LIST OF TABLES

Table I	Summary Table for Key Information in the Reporting Month
Table 1.1	Key Project Contacts
Table 2.1	Summary of Environmental Licensing and Permit Status
Table 2.2	Observations and Recommendations of Site Audit

## LIST OF FIGURE

Figure 1.1	Site Layout Plan
------------	------------------

## LIST OF APPENDICES

Appendix A	Site Audit Summary
Appendix B	Updated Environmental Mitigation Implementation Schedule
Appendix C	Waste Generation in the Reporting Month
Appendix D	Complaint Log
Appendix E	Construction Programme

## **EXECUTIVE SUMMARY**

### **Introduction**

1. This is the 17<sup>th</sup> monthly Environmental Monitoring and Audit (EM&A) Report prepared by Cinotech Consultants Limited for Development of a Biodiesel Plant at Tseung Kwan O Industrial Estate". This report documents the findings of EM&A Works conducted in October 2010.
2. The major site activities undertaken in the reporting month included:
  - Structural Steel Works (incl. material transportation, parts assembling, welding and painting);
  - General site cleaning and tidying;
  - Taking measures for preventing mosquito breeding; and
  - Site Investigation for Jetty Construction.

### **Environmental Monitoring and Audit Works**

3. Environmental monitoring and audit works for the Project were performed regularly as stipulated in the EM&A Manual and the results were checked and reviewed. The implementation of the environmental mitigation measures and environmental complaint handling procedures were also checked.

### **Environmental Licenses and Permits**

4. Licenses/Permits granted to the Project include the Environmental Permit (EP) for the Project, An Environmental Permit No. EP-319/2009 and EP-319/2009/A was issued on 11 March 2009 and 7 April 2009 respectively. The contractor has applied for the Registration of Chemical Waste Producer (WPN-5113-839-C1186-15), Construction Noise Permit (GW-RE0561-09) and Wastewater Discharge License (WT00004508-2009).

### **Key Information in the Reporting Month**

5. Summary of key information in this reporting month is tabulated in Table I.

**Table I Summary Table for Key Information in the Reporting Month**

Event	Event Details		Action Taken	Status	Remark
	Number	Nature			
Complaint received	0	---	N/A	N/A	---
Changes to the assumptions and key construction / operation activities recorded	0	---	N/A	N/A	---
Status of submissions under EP	1	Monthly EM&A Report for September 2010	Submitted to EPD on 28 October 2010 (EP condition 4.2)	Verified by IEC	---
Notifications of any summons & prosecutions	0	---	N/A	N/A	---

**Future Key Issues**

6. Major site activities for the coming month will include:
- Tank Farm 2A – remaining foundation and bund wall construction;
  - Possessing Building – structural steelwork, tank installation and painting;
  - Administration Building – concrete frame construction;
  - Fat Preparation Plant Room and Steam Boiler Room – concrete frame construction;  
and
  - Waste Water Treatment Plant – concrete foundation construction.
7. The future environmental concerns are air quality, waste management and surface runoff from construction works.

## 1 INTRODUCTION

### Background

- 1.1 Development of a Biodiesel Plant at Tseung Kwan O Industrial Estate is a Designated Project (hereafter referred to as “the Project”) under the Environmental Impact Assessment Ordinance (Cap. 449). A study of environmental impact assessment (EIA) was undertaken to consider the key issues of air quality, noise, water quality, ecological and identify possible mitigation measures associated with the works. An EIA Report was approved by the Environmental Protection Department (EPD) on 26 February 2009.
- 1.2 The project is to construct and operate a 100,000 tonnes per annum biodiesel plant at Tseung Kwan O Industrial Estate. The plant will use a multi-feedstock which consists of waste cooking oil (WCO), oil and grease recovered from grease trap waste (GTW), Palm Fatty Acid Distillate (PFAD) and animal fats. The proposed biodiesel plant not only offers a convenient recycling outlet for GTW and WCO but also converts the oil and grease recovered from these wastes into useful products. The Project also offers a cleaner alternative to diesel fuel to the Hong Kong market. The main processes include the followings:-
- Construction of feedstock reception and storage facilities, and offices;
  - Construction of a grease trap waste pre-treatment facility (with a designated treatment capacity of about 200,000 tonnes per annum);
  - Construction of a wastewater treatment plant (with a designed treatment capacity of about 170,000 m<sup>3</sup> per annum);
  - Installation of biodiesel production and glycerine purification system;
  - Construction of product storage and ancillary facilities;
  - Pretreatment of grease trap waste;
  - Treatment of wastewater generated from feedstock pre-treatment and glycerine dewatering process, and filtrates from dewatering process of sludge treatment;
  - Transesterification of feedstock with alcohol-catalyst; and
  - Purification of biodiesel.
- 1.3 The general layout of the Project is shown in **Figure 1.1**.
- 1.4 Layout plan of tank farm **2A, 2B to 2E** is revised and a report is made by Environmental Resources Management (ERM) regarding such change. The report concluded that no deviation is found from the approved EIA report.
- 1.5 An Environmental Permit (EP) No. EP-319/2009 and EP-319/2009/A was issued on 11 March 2009 and 7 April 2009 respectively for Development of a Biodiesel Plant at Tseung Kwan O Industrial Estate to ASB Biodiesel (Hong Kong) Limited as the Permit Holder.
- 1.6 Cinotech Consultants Limited was commissioned by ASB Biodiesel (Hong Kong) Limited to undertake the Environmental Monitoring and Audit (EM&A) works for the Project. China Harbour Engineering Company Limited is the Managing Contractor of the Project. This is the 17<sup>th</sup> Monthly EM&A report summarizing the EM&A works for the Project in October 2010.

## Project Organizations

1.7 Different parties with different levels of involvement in the project organization include:

- Project Proponent – ASB Biodiesel (Hong Kong) Limited
- Contractor – China Harbour Engineering Company Limited (CHEC)
- Environmental Team (ET) – Cinotech Consultants Limited
- Independent Environmental Checker (IEC) – Mannings (Asia) Consultants Ltd.

1.8 The responsibilities of respective parties are detailed in Section 1.10 of the Final EM&A Manual of the Project.

1.9 The key contacts of the Project are shown in Table 1.1.

**Table 1.1 Key Project Contacts**

Party	Role	Name	Position	Phone No.	Fax No.
ASB	Permit Holder	Mr. Eddie Chung	Project Manager	9189 8118	37411661
Cinotech	Environmental Team	Dr. HF Chan	ET Leader	2151 2088	3107 1388
		Ms. Ivy Tam	Project Coordinator	2151 2090	
		Mr. Gary Lau	Audit Team Leader	2151 2098	
Mannings	Independent Environmental Checker	Mr. Mark Cheung	Independent Environmental Checker	3168 2028	3168 2022
		Mr. Gavin Kwok	Assistant to Independent Environmental Checker	3168 2028	
CHEC	Contractor	Mr. Peter Chung	Project Manager	9471 2438	2623 9226
		Mr. Sin Hin Pong	Environmental Supervisor	9739 7660	

## Construction Programme

1.10 The site activities undertaken in the reporting month were:

- Structural Steel Works (incl. material transportation, parts assembling, welding and painting);
- General site cleaning and tidying;
- Taking measures for preventing mosquito breeding; and
- Site investigation for Jetty Construction.

## Summary of EM&A Requirements

1.11 The EM&A requirements are described in the following sections, including:

- Environmental mitigation measures, as recommended in the project EIA study final report; and
- Environmental requirements in contract documents.

1.12 The advice on the implementation status of environmental protection and pollution control/mitigation measures is summarized in Section 3 of this report.

## 2 ENVIRONMENTAL AUDIT

### Site Audits

- 2.1 Site audit was carried out by ET on monthly basis to monitor the timely implementation of proper environmental management practices and mitigation measures in the Project site. The summaries of site audits are attached in **Appendix A**.
- 2.2 Site audit was conducted on 22nd October 2010 by ET in the reporting month. No non-compliance was observed during the site audits.

### Status of Environmental Licensing and Permitting

- 2.3 All permits/licenses obtained for the Project are summarized in **Table 2.1**.

### Status of Waste Management

- 2.4 No Construction and Demolition (C&D) Waste and no Chemical Waste are generated in the reporting month. The quantities of waste generated in this reporting month are summarized in **Appendix C**.

### Implementation Status of Environmental Mitigation Measures

- 2.5 According to the EIA Study Report, Environmental Permit and the EM&A Manual of the Project, the mitigation measures detailed in the documents are recommended to be implemented during the construction phase. An updated summary of the EMIS is provided in **Appendix B**.

**Table 2.1 Summary of Environmental Licensing and Permit Status**

Permit / License No.	Valid Period		Details	Status
	From	To		
<b>Environmental Permit (EP)</b>				
EP-319/2009/A	07/04/2009	N/A	Construction and operation of (i) a biochemical plant with a storage capacity of more than 500 tonnes and in which substances are processed and produced; (ii) a storage, transfer and trans-shipment of oil facility with a storage capacity of not less than 1,000 tonnes; and (iii) a dangerous goods godown with a storage capacity exceeding 500 tonnes	Valid
<b>Registration of Chemical Waste Producer</b>				
WPN-5113-839-C1186-15	12/06/2009	-	Spent Lubrication oil.	Valid
<b>Construction Noise Permit (CNP)</b>				
GW-RE0561-09	10/12/2009	26/11/2010	Use of Powered Mechanical Equipment during 0000-2400 hours on general holidays (including Sundays), 0000-0700 hours on any day not being a general holiday.	Valid
<b>Wastewater Discharge License</b>				
WT00004508-2009	07/09/2009	-	-	Valid



- 2.6 During site inspections in the reporting month, no non-conformance was identified. The observations and recommendations made during the audit sessions are summarized in Table 2.2.

**Table 2.2 Observations and Recommendations of Site Audit**

<b>Parameters</b>	<b>Date</b>	<b>Observations and Recommendations</b>	<b>Follow-up</b>
Waste/ Chemical Management	22/10/2010	Standing water was observed in the drip tray of the generator. The contractor was reminded to clean it to avoid water accumulate.	Follow up action was taken by the contractor.

### **Summary of Complaint and Prosecution**

- 2.7 No environmental related complaint, prosecution or notification of summons was received in the reporting month.
- 2.8 There was no environmental complaint, prosecution or notification of summons received since the Project commencement. The Complaint Log is attached in **Appendix D**.

### 3 FUTURE KEY ISSUES

#### Key Issues for the Coming Month

3.1 Key issues to be considered in the coming month include:

- Noise from operation of the equipment and machinery on-site;
- Effluent discharge generated from surface runoff;
- Dust generated from excavation works and stockpile of dusty materials;
- Maintenance of de-silting facilities and drainage system, such as U-channels;
- Storage of chemicals/fuel and chemical waste/waste oil on site;
- Accumulation of stagnant water in the site areas; and
- Accumulation of C&D waste and general waste on site.

#### Construction Program for the Next Month

3.2 A tentative construction programme is provided in **Appendix E**. The major construction activities in the coming month will include:

- Tank Farm 2A – remaining foundation and bund wall construction;
- Possessing Building – structural steelwork, tank installation and painting;
- Administration Building – concrete frame construction;
- Fat Preparation Plant Room and Steam Boiler Room – concrete frame construction;  
and
- Waste Water Treatment Plant – concrete foundation construction.

## 4 CONCLUSIONS AND RECOMMENDATIONS

### Conclusions

- 4.1 Environmental audit works were conducted in the reporting month. Site inspections were conducted on a monthly basis. The results of were reviewed and checked.
- 4.2 There was no environmental complaint, prosecution or notification of summons received.

### Recommendations

- 4.3 According to the environmental audit performed in the reporting month, the following recommendations were made:

#### *Water Impact*

- To identify any wastewater discharges from site.
- To ensure properly maintenance for de-silting facilities.
- To clear the silt and sediment in the sedimentation tanks.
- To review the capacity of de-silting facilities for discharge.
- To divert all the water generated from construction site to de-silting facilities with enough handling capacity before discharge.
- To avoid accumulation of stagnant and ponding water on site.
- To clear the drainage channel regularly to prevent blockage.

#### *Dust Impact*

- To remove fugitive dusty material on the haul road periodically.
- Excavated dusty materials or stockpile of dusty materials should be covered by impervious sheeting, or sprayed with water so as to maintain entire surface wet.

#### *Noise Impact*

- To space out noisy equipment and position as far away as possible from sensitive receivers.
- To inspect the noise sources inside the site.

#### *Waste / Chemical Management*

- To provide proper rubbish bins / skips for waste collection.
- To provide proper storage area for oil container on site.
- To avoid and check for any accumulation of waste materials or rubbish on site.
- To avoid any discharge or accidental spillage of chemical waste or oil directly from the equipment.


---

---

## FIGURES

---

---

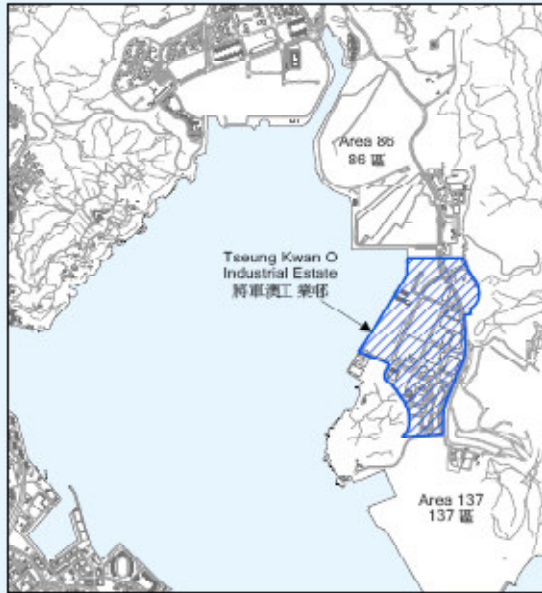

Key 圖例

 Proposed Site



Meters 米

0 100 200 400



Title Development of a Biodiesel Plant at Tseung Kwan O Industrial Estate

Site Layout Plan

Scale

N.T.S

Project

No.

MA9021

Date

Jun-09

Figure

1.1

CINOTECH

---

---

**APPENDIX A  
SITE AUDIT SUMMARY**

---

---

*Development of a Biodiesel Plant at Tseung Kwan O Industrial Estate*

**Monthly Site Inspection Record Summary**

**Inspection Information**

Checklist Reference Number	001022
Date	22 October 2010 (Friday)
Time	15:30 – 16:30

Ref. No.	Non-Compliance	Related Item No.
-	None	-

Ref. No.	Remarks/Observations	Related Item No.
101022-001	<p><b>A. Water Quality</b></p> <ul style="list-style-type: none"> <li>No environmental deficiency was identified during site inspection.</li> </ul> <p><b>B. Air Quality</b></p> <ul style="list-style-type: none"> <li>No environmental deficiency was identified during site inspection.</li> </ul> <p><b>C. Noise</b></p> <ul style="list-style-type: none"> <li>No environmental deficiency was identified during site inspection.</li> </ul> <p><b>D. Waste / Chemical Management</b></p> <ul style="list-style-type: none"> <li>Standing water was observed in the drip tray of the generator. The contractor was reminded to clean it to avoid water accumulate.</li> </ul> <p><b>E. Permit / Licenses</b></p> <ul style="list-style-type: none"> <li>No environmental deficiency was identified during site inspection.</li> </ul> <p><b>F. Reminders</b></p> <ul style="list-style-type: none"> <li>No environmental deficiency was identified during site inspection.</li> </ul> <p><b>G. Others</b></p> <ul style="list-style-type: none"> <li>Follow-up on previous audit section (Ref. No.:000930), all environmental deficiencies were improved/rectified by contractor.</li> </ul>	E8.

	Name	Signature	Date
Recorded by	Kelvin Lau		26 October 2010
Checked by	Dr. HF Chan		26 October 2010

---

---

**APPENDIX B  
UPDATED ENVIRONMENTAL  
MITIGATION IMPLEMENTATION  
SCHEDULE**

---

---



**Appendix B - Summary of Environmental Mitigation Implementation Schedule (Construction Phase)**

Types of Impacts	Mitigation Measures	Status
<p><b>Construction Dust</b></p>	<ul style="list-style-type: none"> <li>• Dust control measures such as water spraying on roads and dusty areas, covering of lorries by impervious sheets and controlling of the falling height of fill materials will be implemented;</li> <li>• Effective dust screens, sheeting or netting will be provided to enclose the scaffolding from the ground level of the facility during the building construction;</li> <li>• All debris and materials will be covered or stored in a sheltered debris collection area;</li> <li>• Hoarding from ground level will be provided along the entire length of the site boundary except for a site entrance or exit;</li> <li>• Every stockpile of dusty materials will be covered entirely by impermeable sheeting or placed in an area sheltered on the top and the 3 sides;</li> <li>• Regular maintenance and checking of the diesel powered mechanical equipment will be adopted to avoid any black smoke emissions and to minimize gaseous emissions.</li> <li>• Monthly site audits will be conducted to ensure the implementation of suitable dust control measures and good site practices.</li> </ul>	<p>^</p> <p>N/A</p> <p>^</p> <p>^</p> <p>^</p> <p>^</p> <p>^</p>
<p><b>Construction Noise</b></p>	<ul style="list-style-type: none"> <li>• Only well-maintained plant will be operated on-site and plant will be serviced regularly during the construction program;</li> <li>• Silencers or mufflers on construction equipment will be utilized and will be properly maintained during the construction program;</li> <li>• Mobile plant, if any, will be sited as far from NSRs as possible;</li> <li>• Machines and plant (such as trucks) that may be in intermittent use will be shut down between work periods or will be throttled down to a minimum;</li> <li>• Plant known to emit noise strongly in one direction will, wherever possible, be orientated so that the noise is directed away from the nearby NSRs; and</li> <li>• Material stockpiles and other structures will be effectively utilised, wherever practicable, in screening noise from onsite construction activities.</li> </ul>	<p>^</p> <p>^</p> <p>^</p> <p>^</p> <p>^</p> <p>^</p>

Types of Impacts	Mitigation Measures	Status
Water Quality	<p><u>Piling Activities</u></p> <ul style="list-style-type: none"> <li>Silt curtain will be installed around the marine piling area to contain any suspended mud and sediments generated during the piling works. Silt removal facilities such as silt traps or sedimentation facilities will be provided to remove silt particles from groundwater (if pumping is required) to meet the requirements of the TM standard under the WPCO. The design of silt removal facilities will be based on the guidelines provided in ProPECC PN 1/94. All drainage facilities and erosion and sediment control structures will be inspected monthly and maintained to ensure proper and efficient operation at all times and particularly during rainstorms.</li> </ul>	N/A
	<p><u>Construction Site Run-off and Drainage</u></p> <ul style="list-style-type: none"> <li>Silt removal facilities such as silt traps or sedimentation facilities will be provided to remove silt particles from runoff to meet the requirements of the TM standard under the WPCO. The design of silt removal facilities will be based on the guidelines provided in ProPECC PN 1/94. All drainage facilities and erosion and sediment control structures will be inspected monthly and maintained to ensure proper and efficient operation at all times and particularly during rainstorms.</li> <li>Careful programming of the works to minimise surface excavations for the construction works during the wet season. If excavation of soil cannot be avoided during the wet season, exposed slope surfaces will be covered by a tarpaulin or other means. Other measures that need to be implemented before, during, and after rainstorms are summarised in ProPECC PN 1/94.</li> <li>Exposed soil surfaces will be protected by paving or fill material as soon as possible to reduce the potential of soil erosion.</li> <li>Open stockpiles of construction materials or construction wastes on-site of more than 50m<sup>3</sup> will be covered with tarpaulin or similar fabric during rainstorms. These materials will not be placed near the seawall area.</li> </ul>	^ ^ ^ ^
	<p><u>General Construction Activities</u></p> <ul style="list-style-type: none"> <li>Debris and refuse generated on-site will be collected, handled and disposed of properly to avoid entering the nearby water sensitive receivers (WSRs). Stockpiles of cement and other construction materials will be kept covered when not being used.</li> <li>Oils and fuels will only be used and stored in designated areas which have pollution prevention facilities. All fuel tanks and storage areas will be provided with locks and be sited on sealed areas, within bunds of a capacity equal to 110% of the storage capacity of the largest tank. The bund will be drained of rainwater after a rain event.</li> </ul>	^ ^

Types of Impacts	Mitigation Measures	Status
	<p data-bbox="369 277 846 305"><u>Sewage generated from On-site Workforce</u></p> <ul data-bbox="415 342 1856 469" style="list-style-type: none"> <li data-bbox="415 342 1856 402">• Temporary sanitary facilities, such as portable chemical toilets, will be provided on-site. A specialised contractor will be responsible for regular collection and appropriate disposal of the sewage and maintenance of these facilities.</li> <li data-bbox="415 407 1856 469">• Monthly site inspections will be carried out during construction to ensure that the mitigation measures listed above are properly implemented. The site audit frequency will be increased to weekly intervals during the piling works.</li> </ul>	<p data-bbox="1913 342 1969 370">N/A</p> <p data-bbox="1913 407 1948 435">^</p>
<p data-bbox="201 521 296 548"><b>Ecology</b></p>	<ul data-bbox="415 505 1856 597" style="list-style-type: none"> <li data-bbox="415 505 1856 597">• Mitigation measures for minimising water quality impacts are presented in detail above. These measures will be properly implemented and good construction practices will be adopted to minimise potential adverse impacts to marine ecological resources.</li> </ul>	<p data-bbox="1913 521 1948 548">^</p>

Remarks: ^ Compliance of mitigation measure; X Non-compliance of mitigation measure;  
 N/A Not Applicable at this stage; • Non-compliance but rectified by the contractor;  
 \* Recommendation was made during site audit but improved/rectified by the contractor;  
 # Non-compliance but rectified/improved by the contractor and awaiting IEC's further comment.

---

---

**APPENDIX C  
WASTE GENERATION IN THE  
REPORTING MONTH**

---

---



---

---

**APPENDIX D  
COMPLAINT LOG**

---

---

**APPENDIX D – COMPLAINT LOG****Reporting Month:** October 2010

<b>Log Ref.</b>	<b>Location</b>	<b>Received Date</b>	<b>Details of Complaint</b>	<b>Investigation/Mitigation Action</b>	<b>Status</b>
N/A	N/A	N/A	N/A	N/A	N/A

**Remarks:** No environmental complaint was received in the reporting month.

---

---

**APPENDIX E**  
**CONSTRUCTION PROGRAMME**

---

---





**Proposed Bio-Diesel Plant at T.K.O.T. Lot No. 39 S.Q. ss.1, ss.2 and Ext. thereto Chun Wang Street, TKO Ind. Estate, Kln  
Programme for License Application Works (Sept 2010 update)**

ID	Section	Task Name	Duration	Start	Finish	2010												2011												2012											
						Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
85		<b>6 Construction Works</b>	<b>627 days</b>	<b>3/4/10</b>	<b>20/12/11</b>	[Gantt bar from 3/4/10 to 20/12/11]																																			
86	6.1	Recommencement of Works (Postponed from 1 July 10 to 1 Nov 10)	0 days	1/11/10	1/11/10	[Gantt bar from 1/11/10 to 1/11/10]																																			
87	<b>6.2</b>	<b>1A - Administration Building</b>	<b>259 days</b>	<b>1/11/10</b>	<b>17/7/11</b>	[Gantt bar from 1/11/10 to 17/7/11]																																			
88	6.2.1	Superstructure Construction Works	114 days	1/11/10	22/2/11	[Gantt bar from 1/11/10 to 22/2/11]																																			
97	<b>6.3</b>	<b>1B - Process Building</b>	<b>471 days</b>	<b>3/4/10</b>	<b>17/7/11</b>	[Gantt bar from 3/4/10 to 17/7/11]																																			
98	6.3.1	Superstructure Construction Works	196 days	3/4/10	15/10/10	[Gantt bar from 3/4/10 to 15/10/10]																																			
100	6.3.3	BDI Piping, Electrical, Insulation & Instrumentation Works	175 days	31/12/10	23/6/11	[Gantt bar from 31/12/10 to 23/6/11]																																			
101	6.3.4	Building Service Installation Works	90 days	28/11/10	25/2/11	[Gantt bar from 28/11/10 to 25/2/11]																																			
106	<b>6.4</b>	<b>1B - Fat Preparation Building</b>	<b>277 days</b>	<b>1/11/10</b>	<b>4/8/11</b>	[Gantt bar from 1/11/10 to 4/8/11]																																			
107	6.4.1	RC Superstructure Construction Works	78 days	1/11/10	17/1/11	[Gantt bar from 1/11/10 to 17/1/11]																																			
116	<b>6.5</b>	<b>1B - Boiler Room</b>	<b>259 days</b>	<b>1/11/10</b>	<b>17/7/11</b>	[Gantt bar from 1/11/10 to 17/7/11]																																			
117	6.5.1	RC Superstructure Construction Works	75 days	1/11/10	14/1/11	[Gantt bar from 1/11/10 to 14/1/11]																																			
127	<b>6.6</b>	<b>2A - Tank Farm</b>	<b>243 days</b>	<b>1/11/10</b>	<b>1/7/11</b>	[Gantt bar from 1/11/10 to 1/7/11]																																			
128	6.6.1	Re- commence Foundation Construction incl. Pipe Rack RC Support Wall	114 days	1/11/10	22/2/11	[Gantt bar from 1/11/10 to 22/2/11]																																			
130	6.6.3	Tank Erection Works & Pipe Rack Steel Works	114 days	6/12/10	29/3/11	[Gantt bar from 6/12/10 to 29/3/11]																																			
137	<b>6.7</b>	<b>2A - GTW Separation Room</b>	<b>272 days</b>	<b>10/12/10</b>	<b>7/9/11</b>	[Gantt bar from 10/12/10 to 7/9/11]																																			
138	6.7.1	ELS & Pump Test & Formation Inspection	84 days	10/12/10	3/3/11	[Gantt bar from 10/12/10 to 3/3/11]																																			
150	<b>6.8</b>	<b>2B-E Tank Farm</b>	<b>247 days</b>	<b>1/11/10</b>	<b>5/7/11</b>	[Gantt bar from 1/11/10 to 5/7/11]																																			
151	6.8.1	Containment/Bund Wall Construction	78 days	1/11/10	17/1/11	[Gantt bar from 1/11/10 to 17/1/11]																																			
159	<b>6.9</b>	<b>3 - Waste Water Treatment Plant</b>	<b>314 days</b>	<b>14/9/10</b>	<b>24/7/11</b>	[Gantt bar from 14/9/10 to 24/7/11]																																			
160	6.9.1	Foundation Construction	39 days	1/11/10	9/12/10	[Gantt bar from 1/11/10 to 9/12/10]																																			
161	6.9.2	Superstructure Construction	91 days	10/12/10	10/3/11	[Gantt bar from 10/12/10 to 10/3/11]																																			
162	6.9.3	IC Reactor Fabrication off-site	178 days	14/9/10	10/3/11	[Gantt bar from 14/9/10 to 10/3/11]																																			
171	<b>6.10</b>	<b>4A - Jetty</b>	<b>446 days</b>	<b>1/10/10</b>	<b>20/12/11</b>	[Gantt bar from 1/10/10 to 20/12/11]																																			
172	6.10.1	SI and Founding Level determination (Includind BD Submission)	118 days	1/10/10	26/1/11	[Gantt bar from 1/10/10 to 26/1/11]																																			
185	<b>6.12</b>	<b>External Works</b>	<b>257 days</b>	<b>20/12/10</b>	<b>2/9/11</b>	[Gantt bar from 20/12/10 to 2/9/11]																																			