MONTHLY EM&A REPORT

ATAL-Degrémont-China State Joint Venture

Contract No. DC/2008/03 Design, Build and Operate Pillar Point Sewage Treatment Works: Fortieth Monthly EM&A Report

March 2014

Environmental Resources Management

16/F, DCH Commercial Centre, 25 Westlands Road, Quarry Bay, Hong Kong Telephone: (852) 2271 3000 Facsimile: (852) 2723 5660 E-mail: post.hk@erm.com http://www.erm.com

MONTHLY EM&A REPORT

ATAL-Degrémont-China State Joint Venture

Contract No. DC/2008/03 Design, Build and Operate Pillar Point Sewage Treatment Works: Fortieth Monthly EM&A Report

March 2014

Reference 0119806

For and on behalf of ERM-Hong Kong, Limited
Approved by: Frank Wan
Signed: March 7.
Position: Partner
Certified by:(Environmental Team Leader – Winnie Ko)
Certified by: (Registered Landscape Architect (R127) – Tai Kai Wai)
Date: 10 March 2014



AECOM 8/F Grand Central Plaza, Tower 2 138 Shatin Rural Committee Road Shatin, Hong Kong www.aecom.com +852 3922 9000 tel +852 3922 9797 fax

Your Ref:

Our Ref:

60017423/C/iyys14031101

By Hand & By Fax (2833 9162)

Drainage Services Department Sewage Services Branch Harbour Area Treatment Scheme Division 5/F., Western Magistracy, 2A Pok Fu Lam Road, Hong Kong.

Attn: Mr. Kenley C.K. KWOK (T: 2159 3409)

11 March 2014

Dear Sir.

Contract No. DC/2008/03 Design, Build and Operate Pillar Point Sewage Treatment Works

Monthly EM&A Report for February 2014

Reference is made to Environmental Team (ET)'s draft of the Monthly EM&A Report for February 2014 provided by email dated 10 March 2014. We have no further comment.

We hereby verify the said Monthly EM&A Report as having complied with the requirement as set out in the EM&A Manual in accordance with the condition 3.6 of Environmental Permit No. EP-321/2008/A.

Should you have any gueries, please feel free to contact the undersigned at 3922 9393.

Yours faithfully,

For and on behalf of AECOM Asia Co. Ltd.

Y T Tang

Independent Environmental Checker

c.c. AECOM – Mr. C Y Hung ERM – Ms. Winnie Ko

ATAL-Degremont-China State JV - Mr. C.Y. Fong

(Fax No. 2404 3310)

(Fax No. 2723 5660)

(Fax No. 2811 3321)

CONTENTS

EXECUTIVE SUMMARY

1	INRODUCTION	1
1.1	PURPOSE OF THE REPORT	1
1.2	STRUCTURE OF THE REPORT	1
2	PROJECT INFORMATION	3
2.1	BACKGROUND	3
2.2	GENERAL SITE DESCRIPTION	3
2.3	CONSTRUCTION ACTIVITIES	4
2.4	PROJECT ORGANISATION AND MANAGEMENT STRUCTURE	4
2.5	STATUS OF ENVIRONMENTAL APPROVAL DOCUMENTS	4
3	ENVIRONMENTAL MONITORING REQUIREMENTS	6
3.1	AIR QUALITY MONITORING	6
3.1.1	Monitoring Location	6
3.1.2	Monitoring Parameter and Frequency	6
3.1.3	Action and Limit Levels	6
3.1.4	Monitoring Equipment	6
3.1.5	Monitoring Methodology	7
3.1.6	Event and Action Plan	9
3.2	LANDSCAPE AND VISUAL MONITORING	9
3.3	Environmental Mitigation Measures and Environmental	
	REQUIREMENTS IN CONTRACT	9
4	IMPLEMENTATION STATUS ON ENVIRONMENTAL PROTECTION	
	REQUIREMENTS	10
5	MONITORING RESULTS	11
5.1	AIR QUALITY	11
6	WASTE MANAGEMENT	12
7	ENVIRONMENTAL INSPECTIONS	13
7.1	WEEKLY SITE AUDITS	13
7.2	LANDSCAPE AND VISUAL MONITORING	13
8	ENVIRONMENTAL NON-CONFORMANCE	15
8.1.1	Summary of Monitoring Exceedance	15
8.1.2	Summary of Environmental Non-Compliance	15
8.1.3	Summary of Environmental Complaint	15
8.1.4	Summary of Environmental Summon and Successful Prosecution	15
9	FUTURE KEY ISSUES	16

9.1.1 9.1.2 9.1.3	Key Issues for the Coming Month Monitoring Schedule for the Next Reporting Period Construction Programme for the Next Three Months	16 16 16
10	REVIEW OF THE EM&A DATA AND EIA PREDICTIONS	17
10.1 10.2 10.3	AIR QUALITY WASTE MANAGEMENT CONCLUSION OF THE REVIEW	17 17 18
11	CONCLUSIONS	19
	LIST OF TABLES	
Table 2.1 Table 3.2 Table 3.2 Table 3.3 Table 3.4 Table 6.1 Table 9.1 Table 10.1 Table 10.2	Summary of Construction Activities Undertaken in Reporting Period Summary of Environmental Licensing, Notification and Permit Status Construction Phase Air Monitoring Locations Construction Phase Air Quality Monitoring Parameters and Frequency Action and Limit Levels for Air Quality TSP Monitoring Equipment Quantities of Waste Generated from the Project Construction Works to be Undertaken in the Next Reporting Period Comparison of the HKAQO and Air Quality Monitoring Results Quantity of Actual Amount of C&D Materials, General Wastes and Ch Wastes Generated and EIA Estimation LIST OF ANNEXES	
Annex A	Location of Project	
Annex B	Works Location	
Annex C	Project Organization Chart and Contact Detail	
Annex D	Locations of Air Quality Monitoring Stations	
Annex E	Monitoring Schedule of the Reporting Month and Next Month	
Annex F	Calibration Reports for HVSs	
Annex G	24-hour and 1-hour TSP Monitoring Results	
Annex H	Event / Action Plan for Air Quality Monitoring	
Annex I	Implementation Schedule of Mitigation Measures	
Annex J	Waste Flow Table	
Annex K	Environmental complaint, Environmental Summons and Prosecution Log	
Annex L	Construction Programme for the Project	

EXECUTIVE SUMMARY

The construction works of *DC/2008/03 of Design*, *Build and Operate Pillar* Point Sewage Treatment Works (the Project) commenced on 13 November 2010. This is the 40th monthly Environmental Monitoring and Audit (EM&A) report presenting the EM&A works carried out during the period from 1 to 28 February 2014 in accordance with the EM&A Manual.

Summary of Construction Works undertaken during the Reporting Month

Works undertaken in the reporting month included:

- Construct finishing works at the Administration Building, Sludge Dewatering Building, UV Building, Sludge Skip Storage Building, PTW, CEPT, Reuse Water Pump Room, Existing Solid Handling Building, Weighbridge, Existing Outfall Pumping Station and Chemical Building;
- Install E&M equipment at the Administration Building, Sludge Dewatering Building, PTW, CEPT, UV Building, Reuse Water Pump Room, Chemical Building, Deodorisation Unit Portion A, Deodorisation Unit Portion B, Weighbridge, Electrical buildings No.1, No.3 and No.4;
- T&C at Septic Waste Reception Station;
- Demolish Existing PTW;
- Construct drainage, cable ducts, water mains and boundary walls and installation of E&M Duct laying at P2;
- Conduct preparation works for Payment Flow Meter at Payment Flow Meter Chamber; and
- Construct backfilling and drainage works for the whole site.

Environmental Monitoring and Audit Progress

Landscape & Visual Monitoring

A summary of the monitoring activities undertaken in this reporting period is listed below:

Once

•	24-hour TSP Monitoring at each monitoring station (AM1	5 sets
	and AM2)	
•	1-hour TSP Monitoring at each monitoring station (AM1	15 sets
	and AM2)	
•	Joint Environmental Site Inspection	4 times

Air Quality

5 sets of 24-hour TSP and 15 sets of 1-hr TSP measurements were carried out at each of the designated monitoring stations during the reporting period. No exceedance was recorded during the reporting period.

Waste Management

Waste generated from this Project includes inert construction and demolition (C&D) materials (public fill) and non-inert C&D materials (construction wastes). In total, 944.11 tonnes of inert C&D material were generated from the Project, of which 20 tonnes were reused in this Contract and the remaining 924.11 tonnes were disposed as public fill. 50.00 kg of metals, 60.00 kg of papers / cardboard packing and 1120.00 kg of plastics were sent to recyclers for recycling during the reporting period.

Environmental Site Inspection

Four weekly joint environmental site inspections were carried out by the representatives of the Contractor, SOR and the Environmental Team (ET). Details of the audit findings and implementation status of the mitigation measures are presented in *Section 7.1*.

Landscape & Visual

Review on landscape and visual mitigation measures was performed on 27 February 2014. Details of the audit findings and implementation status of the mitigation measures are presented in *Sections 3.2* and *7.2*.

Environmental Exceedance/Non-conformance/Compliant/Summons and Prosecution

No exceedance was recorded during the reporting period.

No non-compliance event was recorded during the reporting period.

No environmental complaint and summon/prosecution was received in this reporting period.

Future Key Issues

Works to be undertaken in the next reporting month include:

- Construct finishing works at the Administration Building, Sludge Dewatering Building, UV Building, Sludge Skip Storage Building, PTW, CEPT, Reuse Water Pump Room, Existing Solid Handling Building, Weighbridge, Existing Outfall Pumping Station and Chemical Building;
- Phase 5 T&C at the Administration Building, Sludge Dewatering Building, PTW, CEPT, UV Building, Septic Waste Reception Station, Reuse Water Pump Room, Chemical Building, Deodorisation Unit Portion A, Deodorisation Unit Portion B, Electrical buildings No.1, No.3 and No.4;
- Install E&M equipment at Weighbridge;
- Building surface works at Sludge Skip Storage Building;
- Refurbishment works at Existing Solid Handling Building;
- Place planting soil on rooftop;
- Construct drainage, cable ducts, water mains and boundary walls and installation of E&M Duct laying at P2;
- Conduct installation of payment flow meter and chamber reinstatement at Payment Flow Meter Chamber; and
- Demolition of Existing PTW.

Environmental impacts arising from the above construction activities are mainly associated with dust, construction noise, site runoffs, waste management and landscaping issues.

1 INRODUCTION

ERM-Hong Kong, Limited (ERM) was appointed by ATAL – Degrémont – China State Joint Venture (ADC-JV) (the Contractor) as the Environmental Team (ET) to undertake the Environmental Monitoring and Audit (EM&A) programme for the *Contract No. DC*/2008/03 of *Design, Build and Operate Pillar Point Sewage Treatment Works* (the Project).

1.1 Purpose of the Report

This is the 40th EM&A report which summarises the monitoring results and audit findings for the EM&A programme during the reporting period from 1 to 28 February 2014.

1.2 STRUCTURE OF THE REPORT

The structure of the report is as follows:

Section 1: **Introduction**

It details the scope and structure of the report.

Section 2: **Project Information**

It summarises the background and scope of the Project, site description, project organization, construction programme, construction works undertaken and status of the Environmental Permits (EP)/licences over the construction phase of the Project.

Section 3: Environmental Monitoring Requirements

It summarises the environmental monitoring requirements including monitoring parameters, programmes, methodologies, frequency, locations, Action and Limit Levels, Event/Action Plans, environmental mitigation measures as recommended in the approved EIA report, EP and relevant environmental requirements stated in the Contract Specification.

Section 4: Implementation Status on Environmental Mitigation Measures

It summarises the implementation of environmental protection measures during the reporting period.

Section 5: Monitoring Results

It summarises the monitoring results obtained in the reporting period.

Section 6: Waste Management

It summarises the quantity of public fill and construction waste generated in the reporting period

Section 7: **Environmental Site Inspection**

It summarises the audit findings of the weekly site inspections undertaken within the reporting period.

Section 8: Environmental Non-conformance

It summarises any exceedance of environmental performance standard, environmental complaints and summons received within the reporting period.

Section 9: Further Key Issues

It summarises the impact forecast and monitoring schedule for the next reporting month.

Section 10: Review of the EM&A Data and Predictions

It compares the monitoring data and waste quantity against the predictions in the approved Project EIA report.

Section 11: Conclusions

2 PROJECT INFORMATION

2.1 BACKGROUND

The existing Pillar Point Sewage Treatment Works (PPSTW) is located to the north of the Tuen Mun River Trade Terminal and is abutting the Lung Mun Road in the north. It is a preliminary treatment works with screening and grit removal processes and the treated effluent is discharged to the sea (North Western Water Control Zone) via a twin submarine outfall. The *Review of the Tuen Mun and Tsing Yi Sewerage Master Plan* (RTMTYSMP), commissioned in February 1999, recommended that the sewage treatment capacity be expanded and the plant be upgraded to chemically enhanced primary treatment (CEPT) with disinfection. This is to cater for the projected ultimate population and planned developments in the Tuen Mun area, and to improve the effluent quality reducing pollution loadings to the receiving waters.

The upgrading of the PPSTW comprises the following works:

- expanding the treatment capacity of the existing PPSTW to cope with the increased peak wet-weather sewage flow in Tuen Mun area;
- upgrading the sewage treatment level of the existing PPSTW to incorporate chemical treatment with disinfection at minimum removal rates of 70%, 55% and 99.9% of suspended solids (SS), biochemical oxygen demand (BOD) and *E.coli*, respectively;
- upgrading the existing septic waste reception facilities at PPSTW; and
- providing and upgrading ancillary facilities including the administration building, workshop, laboratory, odour control facilities, sludge handling and dewatering facilities, access roads and minor landscaping works within the STW for the operation and maintenance of the upgraded STW.

The potential environmental impacts of the Project have been studied in the "Upgrading of Pillar Point Sewage Treatment Works" (EIAO Register No: AEIAR-145/2008). The EIA was approved on 10 June 2008 under the Environmental Impact Assessment Ordinance (EIAO) and an Environmental Permit (EP-321/2008) for the works was granted on 17 November 2008. A variation of an Environmental Permit was granted on 23 April 2013 (EP-321/2008/A). Under the requirements of Condition 3.1 of EP-321/2008/A, an EM&A programme as set out in the EM&A Manual is required to be implemented.

The construction works commenced on 13 November 2010 and are scheduled for completion by 2014.

2.2 GENERAL SITE DESCRIPTION

The open area adjacent to the existing PPSTW has been designated for the upgrading works. The layout of the upgrading works is illustrated in *Annex*

2.3 CONSTRUCTION ACTIVITIES

A summary of the major construction activities undertaken in the reporting period is shown in *Table 2.1*. The locations of the construction activities are shown in *Annex B*. The construction programme of the Project in the reporting month and the upcoming month is presented in *Annex L*.

Table 2.1 Summary of Construction Activities Undertaken in the Reporting Period

Construction Activities Undertaken

- Construct finishing works at the Administration Building, Sludge Dewatering Building, UV Building, Sludge Skip Storage Building, PTW, CEPT, Reuse Water Pump Room, Existing Solid Handling Building, Weighbridge, Existing Outfall Pumping Station and Chemical Building;
- Install E&M equipment at the Administration Building, Sludge Dewatering Building, PTW, CEPT, UV Building, Reuse Water Pump Room, Chemical Building, Deodorisation Unit Portion A, Deodorisation Unit Portion B, Weighbridge, Electrical buildings No.1, No.3 and No.4;
- T&C at Septic Waste Reception Station;
- Demolish Existing PTW;
- Construct drainage, cable ducts, water mains and boundary walls and installation of E&M Duct laying at P2;
- Conduct preparation works for Payment Flow Meter at Payment Flow Meter Chamber; and
- Construct backfilling and drainage works for the whole site.

2.4 PROJECT ORGANISATION AND MANAGEMENT STRUCTURE

The project organisation chart and contact details are shown in *Annex C*.

2.5 STATUS OF ENVIRONMENTAL APPROVAL DOCUMENTS

A summary of the valid permits, licences, and/or notifications on environmental protection for this Project is presented in *Table 2.2*.

Table 2.2 Summary of Environmental Licensing, Notification and Permit Status

Permit/ Licences/	Reference	Validity Period	Remarks
Notification			
Environmental	EP-321/2008/A	Throughout the	Permit granted on 23
Permit		Contract	April 2013
Notification of	Ref No. 308136	Throughout the	-
Construction Works		Contract	
under the Air			
Pollution Control			
(Construction Dust)			
Regulation			

Permit/ Licences/	Reference	Validity Period	Remarks
Notification			
Water Discharge	WT00017778-2013	22 November 2013	Wastewater discharge
License		- 31 October 2015	licence was issued by
			EPD on 22 November
			2013.
Construction Noise	GW-RW0036-14	28 January 2014 -	-
Permit		27 July 2014	
Chemical Waste	5213-421-A2620-01	Throughout the	Licence approved on 28
Producer Registration		Contract	October 2010

3 ENVIRONMENTAL MONITORING REQUIREMENTS

3.1 AIR QUALITY MONITORING

3.1.1 Monitoring Location

The proposed air quality monitoring stations for the construction phase of the Project, as recommended in the approved EM&A Manual, are given in *Table 3.1* and shown in *Annex D*. The proposed locations (AM1 and AM2) have been agreed with the Drainage Services Department (DSD), Environmental Protection Department (EPD) and the Independent Environmental Checker (IEC).

Table 3.1 Construction Phase Air Monitoring Locations

Monitoring ID	Air Quality Monitoring Station	
AM1	Tuen Mun EMSD Servicing Vehicle Station	
AM2	River Trade Terminal Office	

3.1.2 Monitoring Parameter and Frequency

The construction phase air quality monitoring has been conducted at the designated monitoring stations in accordance with the requirements stipulated in the EM&A Manual. 1-hour and 24-hour TSP levels have been monitored at the frequency and duration stated in *Table 3.2*. The construction phase TSP monitoring has been conducted as per the schedule presented in *Annex E*.

Table 3.2 Construction Phase Air Quality Monitoring Parameters and Frequency

Parameter	Frequency
24-hour average TSP	Once every 6 days
1-hour average TSP	3 times every 6 days

3.1.3 Action and Limit Levels

The Action and Limit levels have been established and presented in *Table 3.3*.

Table 3.3 Action and Limit Levels for Air Quality

Parameter	Air Monitoring Station	Action Level, µgm-3	Limit Level, µgm ⁻³
24-hour TSP	AM1	183	260
	AM2	192	260
1-hour TSP	AM1	343	500
	AM2	383	500

3.1.4 Monitoring Equipment

Continuous 24-hour and 1-hour TSP monitoring was performed using High Volume Samplers (HVS) with appropriate sampling inlets located at the designated monitoring stations.

The performance specification of HVS complied with the standard method "Determination of Suspended Particulate Matter in the Atmosphere (High Volume Method)" as stipulated in US EPA Standard Title 40, Code of Federation Regulations Chapter 1 (Part 50 Appendix B). Table 3.4 summarises the equipment that were deployed for the 24-hour and 1-hour TSP monitoring respectively.

Table 3.4 TSP Monitoring Equipment

Monitoring Station	Monitoring Equipment (HVS and Calibrator)
24-hr and 1-hr TSP	
AM1	GMW GS-2310 (S/N 7580), CM-AIR-43 (S/N 0438320)
AM2	GMW GS-2310 (S/N 1252), CM-AIR-43 (S/N 0438320)

3.1.5 *Monitoring Methodology*

The setup locations of the HVSs were listed in *Table 3.1*. All HVSs were free-standing with no obstruction.

The following criteria were considered in the installation of the HVSs:

- appropriate support to secure the samplers against gusty wind were provided at AM1 and AM2;
- a minimum of 2m separation from walls, parapets and penthouses was required for rooftop samplers;
- no furnace or incinerator flues was nearby;
- · airflow around the sampler was unrestricted; and
- permission was obtained to set up the samplers and gain access to the monitoring stations.

Preparation of Filter Papers

- glass fibre filters were labelled and sufficient filters that were clean and without pinholes were selected;
- all filters were equilibrated in the conditioning environment for 24 hours before weighing. The conditioning environment temperature was around 25°C and not variable by more than ± 3°C; the relative humidity (RH) was 40%; and
- SGS Hong Kong Ltd, a HOKLAS accredited laboratory, implemented comprehensive quality assurance and quality control programmes.

Field Monitoring

 the power supply was checked to ensure that the HVSs were working properly;

- the filter holder and area surrounding the filter were cleaned;
- the filter holder was removed by loosening the foul bolts and a new filter, with stamped number upward, on a supporting screen was aligned carefully;
- the filter was properly aligned on the screen so that the gasket formed an airtight seal on the outer edges of the filter;
- swing bolts were fastened to hold the filter holder down to the frame. The pressure applied should be sufficient to avoid air leakage at the edges;
- the shelter lid was closed and secured with an aluminium strip;
- the HVSs were warmed-up for about 5 minutes to establish runtemperature conditions;
- a new flowrate record sheet was inserted into the flow recorder;
- the flow rates of the HVSs were checked and adjusted to between 1.22 and 1.37 m³ min⁻¹ which were within the range specified in the EM&A Manual (ie 0.6 to 1.7 m³ min⁻¹);
- the programmable timer was set for a sampling period of 24 hours ± 1 hour, and the starting time, weather condition and the filter number were recorded;
- the initial elapsed time was recorded;
- at the end of sampling, the sampled filter was removed carefully and folded in half I so that only surfaces with collected particulate matter were in contact;
- the filter was placed in a clean plastic envelope and sealed;
- all monitoring information was recorded on a standard data sheet; and
- filters were sent to SGS Hong Kong Ltd for analysis.

Maintenance and Calibration

- the HVSs and their accessories were maintained in good working condition, eg. motor brushes were replaced routinely and electrical wiring was checked to ensure a continuous power supply; and
- the flow rate of each HVS with mass flow controller was calibrated using an orifice calibrator. Initial calibrations of the dust monitoring equipment were conducted upon installation and prior to commissioning. Five-point calibration was carried out for HVSs using CM-AIR-43 Calibration Kit. HVSs are calibrated on a bi-monthly basis. The calibration records for the HVSs are given in *Annex F*.

Wind Data Monitoring

Average wind data (wind speed and wind direction) during the monitoring period were obtained from the meteorological station at Tuen Mun of the Hong Kong Observatory (HKO) and were presented in *Annex G*.

3.1.6 Event and Action Plan

The Event/Action Plan (EAP) for air quality monitoring is presented in *Annex H*.

3.2 LANDSCAPE AND VISUAL MONITORING

In accordance with the EM&A Manual, monthly landscape and visual monitoring is required to ensure that the design, implementation and maintenance of landscape and visual mitigation measures recommended in the approved EIA Report are fully achieved. The monitoring procedures and criteria as described in the EM&A Manual were adopted.

3.3 ENVIRONMENTAL MITIGATION MEASURES AND ENVIRONMENTAL REQUIREMENTS IN CONTRACT

All the relevant environmental mitigation measures listed in the EIA Report and EM&A Manual as well as the specific environmental requirements stated in the Contract Specification are summarised in *Annex I*. A summary of the key environmental mitigation measures implemented as per the Contract Requirements is also presented in *Annex I*.

4 IMPLEMENTATION STATUS ON ENVIRONMENTAL PROTECTION REQUIREMENTS

The Contractor has implemented environmental mitigation measures and requirements as stated in the approved EIA Report, EM&A Manual and EP. The implementation status of the measures during the reporting period is summarised in *Annex I*.

5 MONITORING RESULTS

5.1 AIR QUALITY

A total of 5 sets of 24-hour and 15 sets of 1-hour TSP measurements were taken at each of the monitoring stations (AM1 and AM2) during the reporting period. The monitoring data for 24-hour and 1-hour TSP together with the wind data and graphical presentations for the past 4 months are presented in *Annex G*. The weather conditions during the monitoring period ranged from sunny to rainy. The local impacts near the monitoring stations of AM1 and AM2 were mainly associated with vehicular emissions. No exceedance of Action and Limit Level of the 1-hr and 24-hr TSP was recorded during the reporting period.

6 WASTE MANAGEMENT

Wastes generated from this Project include inert construction and demolition (C&D) materials (public fill) and non-inert C&D materials (construction waste). Construction waste comprises general refuse, metals and paper/cardboard packaging materials. Metals generated from the Project are also grouped into construction waste as the materials were not disposed of with others at public fill. Reference has been made to the Monthly Summary Waste Flow Table prepared by the Contractor (see *Annex J*). With reference to the relevant handling records and trip tickets of this Project, the quantities of different types of waste generated in the reporting month are summarised in *Table 6.1*.

 Table 6.1
 Quantities of Waste Generated from the Project

Month / Year		Quantity		
	Total Inert C&D	Non-inert C&D Materials (b)		
	Materials Generated (a)	C&D Materials Recycled (c)	C&D Waste Disposed of at Landfill ^(d)	Chemical Waste
February 2014	944.11 tonnes	1230.00 kg	7.66 tonnes	0 L

Notes:

- (a) Inert C&D materials (public fill) include bricks, concrete, building debris, rubble and excavated spoil. In total, 944.11 tonnes of inert C&D waste were generated from the Project, of which 20.00 tonnes were reused in this Contract and the remaining 924.11 tonnes were disposed as public fill. The detailed waste flow is presented in *Annex J*.
- (b) Non-inert C&D materials (construction wastes) include metals, paper / cardboard packaging waste, plastics and other wastes such as general refuse. Metals generated from the Project were grouped into construction wastes as the materials were not disposed of with others at the public fill.
- (c) 50.00 kg of metals, 60.00 kg of papers/ cardboard packing and 1120.00 kg of plastics were sent to recyclers for recycling during the reporting period.
- (d) Construction wastes other than metals, paper/cardboard packaging, plastics and chemicals were disposed of at WENT Landfill by subcontractors.

7 ENVIRONMENTAL INSPECTIONS

7.1 WEEKLY SITE AUDITS

Joint site inspections were conducted by representatives of the Contractor, the SOR and the ET on 7, 11, 19, and 27 February 2014. The IEC was also present at the joint inspection on 27 February 2014.

Major observations during the reporting period are summarised as follows:

7 February 2014

Accumulated sludge was observed at CEPT pump room due to leakage.
 The Contractor was reminded to remove and dispose of the sludge properly and to fix the leakage.

11 February 2014

- Sludge-like stains were observed on the rooftop of CEPT due to poor handling. The Contractor was reminded to remove the stains; and
- Tree tag for T02 was observed missing. The Contractor was reminded to provide proper tree tag.

19 February 2014

• Nil.

27 February 2014

- Stockpile of sand was observed without covering by tarpaulin near Old Weighbridge and CEPT. The Contractor was reminded to cover the stockpile with tarpaulin to avoid fugitive dust emissions;
- Construction materials were observed being stored next to Tree T142, T143, T144 and T135. The Contractor was reminded to remove the construction materials and provide proper tree protection zones to the retained trees; and
- Some tree roots of retained trees near Old Weighbridge were observed being exposed (i.e. R29). The Contractor was reminded to maintain tree root protection for all retained trees at all time during construction period.

Follow-up actions resulting from the last site inspections were taken as reported by the Contractor and their results were observed in the site inspections conducted in the reporting period.

7.2 LANDSCAPE AND VISUAL MONITORING

In accordance with the EM&A Manual, monthly landscape and visual monitoring is required to ensure that the design, implementation and

maintenance of landscape and visual mitigation measures recommended in the EIA Report are fully achieved. A review of the landscape and visual mitigation measures was performed on 27 February 2014. It was confirmed that most of the necessary landscape and visual mitigation measures as summarised in *Annex I* were implemented by the Contractor. The major findings are summarised as follow:

27 February 2014

- Construction materials were observed being stored next to Tree T142, T143, T144 and T135. The Contractor was reminded to remove the construction materials and provide proper tree protection zones to the retained trees; and
- Some tree roots of retained trees near Old Weighbridge were observed being exposed (i.e. R29). The Contractor was reminded to maintain tree root protection for all retained trees at all time during construction period.

8 ENVIRONMENTAL NON-CONFORMANCE

8.1.1 Summary of Monitoring Exceedance

No exceedances of the Action and Limit Levels of 1-hr and 24-hr TSP was recorded during the reporting period.

8.1.2 Summary of Environmental Non-Compliance

No non-compliance event was recorded during the reporting period.

8.1.3 Summary of Environmental Complaint

No complaint was received during the reporting period. The cumulative environmental complaint log is shown in *Annex K*.

8.1.4 Summary of Environmental Summon and Successful Prosecution

No summon was received during the reporting period. The cumulative summons/prosecution log is shown in *Annex K*.

9 FUTURE KEY ISSUES

9.1.1 Key Issues for the Coming Month

Works to be undertaken for the coming monitoring period are summarised in *Table 9.1*.

Table 9.1 Construction Works to be Undertaken in the Next Reporting Period

Construction Activities Undertaken

- Construct finishing works at the Administration Building, Sludge Dewatering Building, UV Building, Sludge Skip Storage Building, PTW, CEPT, Reuse Water Pump Room, Existing Solid Handling Building, Weighbridge, Existing Outfall Pumping Station and Chemical Building;
- Phase 5 T&C at the Administration Building, Sludge Dewatering Building, PTW, CEPT, UV Building, Septic Waste Reception Station, Reuse Water Pump Room, Chemical Building, Deodorisation Unit Portion A, Deodorisation Unit Portion B, Electrical buildings No.1, No.3 and No.4;
- Install E&M equipment at Weighbridge;
- Building surface works at Sludge Skip Storage Building;
- Refurbishment works at Existing Solid Handling Building;
- Place planting soil on rooftop;
- Construct drainage, cable ducts, water mains and boundary walls and installation of E&M Duct laying at P2;
- Conduct installation of payment flow meter and chamber reinstatement at Payment Flow Meter Chamber; and
- Demolition of Existing PTW.

Potential environmental impacts arising from the above construction activities will be mainly associated with dust, construction noise, site runoffs, waste management and landscaping issues.

9.1.2 Monitoring Schedule for the Next Reporting Period

The tentative schedule of TSP monitoring for the next reporting period was presented in *Annex E*. Environmental monitoring will be conducted at the same monitoring locations in the next reporting period. The monitoring programme has been reviewed and was considered adequate for the nature of works in progress.

9.1.3 Construction Programme for the Next Three Months

The most up-to-date construction programme for the Project is presented in *Annex L*.

10

10.1 AIR QUALITY

Since the EIA has only included a qualitative assessment of dust impact during the construction phase, a comparison was made between the monitoring results from the start of the Project and the Hong Kong Air Quality Objectives (HKAQO) (see *Table 10.1*).

Table 10.1 Comparison of the HKAQO and Air Quality Monitoring Results

Monitoring Station	Corresponding ASR in EIA	HKAQO, μg m ⁻³	Measured 24-hour TSP Monitoring Results, μg m ^{-3 (a) (b)}	
		24 hour (a)	Average	Range
AM1	A1	260	74	50 - 119
AM2	A7	260	78	51 - 109

Notes:

- (a) Only 24-hour TSP monitoring results were compared as there is no 1 hour TSP criterion in HKAQO.
- (b) The average and range of data were calculated from the period between the commencement of the construction works and this reporting month.

The monitoring results show that the average and range of the 24-hour TSP levels recorded since the commencement of the construction works have been well below the 24-hour TSP criterion in the HKAQO. Recommended mitigation measures in *Section 3.7.1.1* of EIA have been implemented throughout the construction period and were considered effective.

10.2 WASTE MANAGEMENT

The estimated amount of waste generated from the Project and the cumulative quantities of waste generated up to this reporting month are presented in *Table 10.2*. The amount of inert C&D material sent to public fills is higher than the estimated amount in the EIA. With reference to the C&D Material Assessment (Contractor's General Submission (CSF) No.:

DC200803/CSF/SAF/060026/A), the difference in quantities is mainly due to the differences in excavation depths and the excavation methods in the Contract Works and that assumed in the Reference Design. Recommended mitigation measures in *Sections* 7.5.1.1 to 7.5.1.9 of the EIA will continue to be implemented during the construction stage.

Table 10.2 Quantity of Amount of C&D Materials, General Wastes and Chemical Wastes Actually Generated and Estimated in the EIA and C&D Material Assessment

Type of Material	Estimated Amount of Public Fill and Construction Waste in the EIA (inert & non- inert)	Estimated Amount of Public Fill and Construction Waste in C&D Material Assessment (CSF No.: DC200803/CSF/SAF/060026/ A) (c)	Construction	Public Fill and
Amount of C&D Materials Arising	61,489.00 m ³	77,600.00 m ³	131,499.21	m³
Amount of C&D Materials Reused on other site	-	-	3,163.89	m^3
Amount of C&D Materials Reused on site	14,926.00 m ³	18,000.00 m ³	24,196.67	m^3
Amount of C&D Materials Sent to Fill Banks	46,563.00 m ³	59,600.00 m ³	103,024.11	m^3
General Refuse	Small	-	1,999.88	tonnes
Chemical Waste	Small	-	810.00	L

Notes:

- (a) The actual amount of C&D Materials has been recorded since the commencement of construction works.
- (b) The density of soil and rock (bulked) is 1.8 tonnes/m³.
- (c) The estimated amount of C&D material generated from the Contract Works was revised in the C&D Material Assessment and submitted to the SO on 9 September 2010 (CSF No.: DC200803/CSF/SAF/060026/A) because of the new plant & facility layout.

10.3 CONCLUSION OF THE REVIEW

The EIA predictions and monitoring results since the commencement of the construction works have been reviewed. The EIA concluded that the Project would not cause adverse impacts to the environment, and monitoring results have also confirmed that so far. Mitigation measures recommended in the EP, EIA and EM&A Manual will continue to be implemented throughout the construction phase of the Project.

11 CONCLUSIONS

This EM&A Report presents the EM&A programme undertaken during the reporting period from 1 to 28 February 2014 in accordance with EM&A Manual and requirements of EP (EP-321/2008/A).

No exceedance of Action and Limit Levels of 24-hour TSP and 1-hour TSP was recorded at the monitoring stations during the reporting period.

Monthly landscape and visual monitoring was conducted in the reporting period. Most of the necessary landscape and visual mitigation measures recommended in the EIA Report were implemented by the Contractor. Follow-up actions are required by the Contractor to improve protection of the retained or to-be transplanted trees.


No non-compliance event was recorded during the reporting period.

No complaint and summons/prosecution was received during the reporting period.

The ET will keep track of the EM&A programme to ensure compliance of environmental requirements and the proper implementation of all the necessary mitigation measures in the coming periods.

Annex A

Location of Project

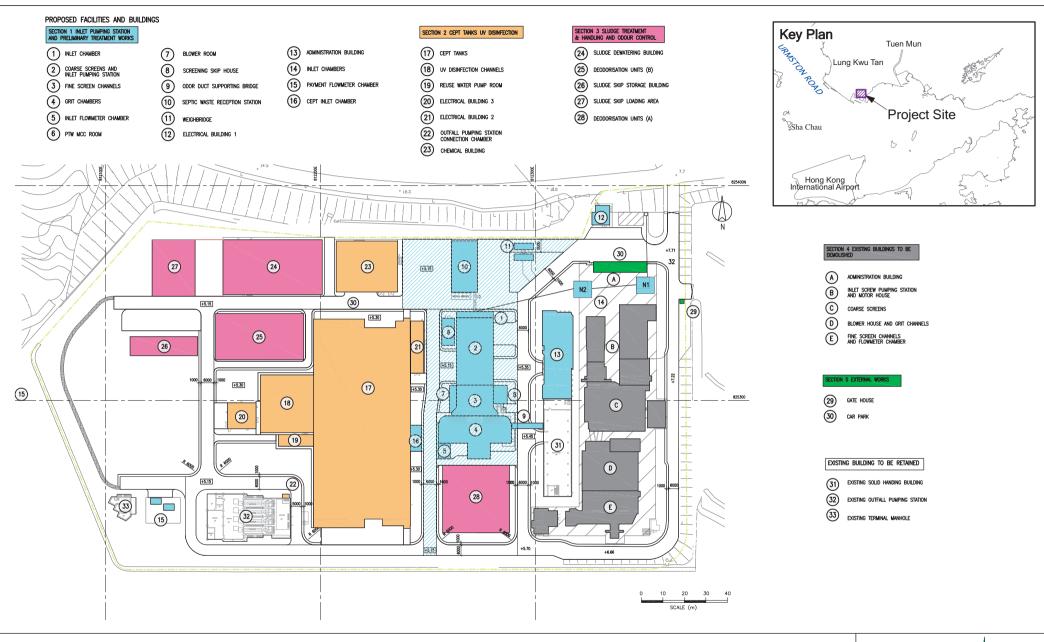

Annex A


Contract No. DC/2008/03 - Design, Build and Operate Pillar Point Sewage Treatment Works Layout of Project

Environmental Resources Management



Annex B


Works Location

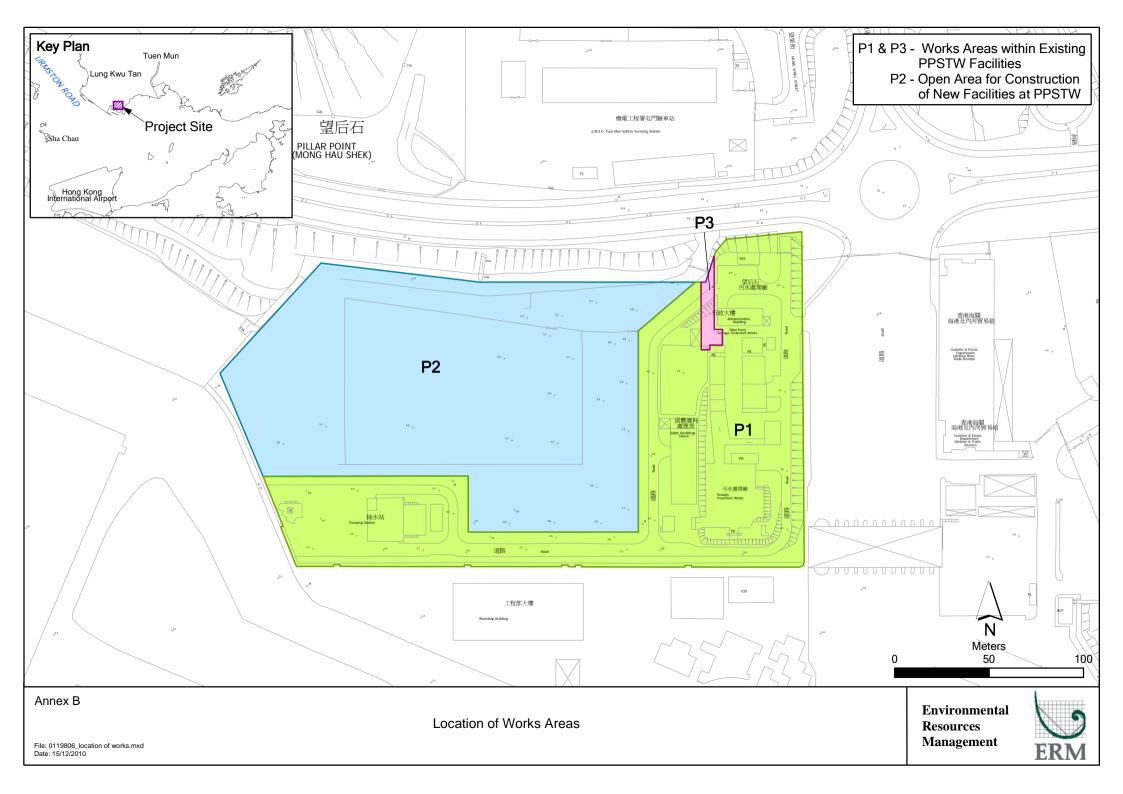

Annex C

Project Organization Chart with Contact Details


Project Organization During Construction Phase (with contact details)

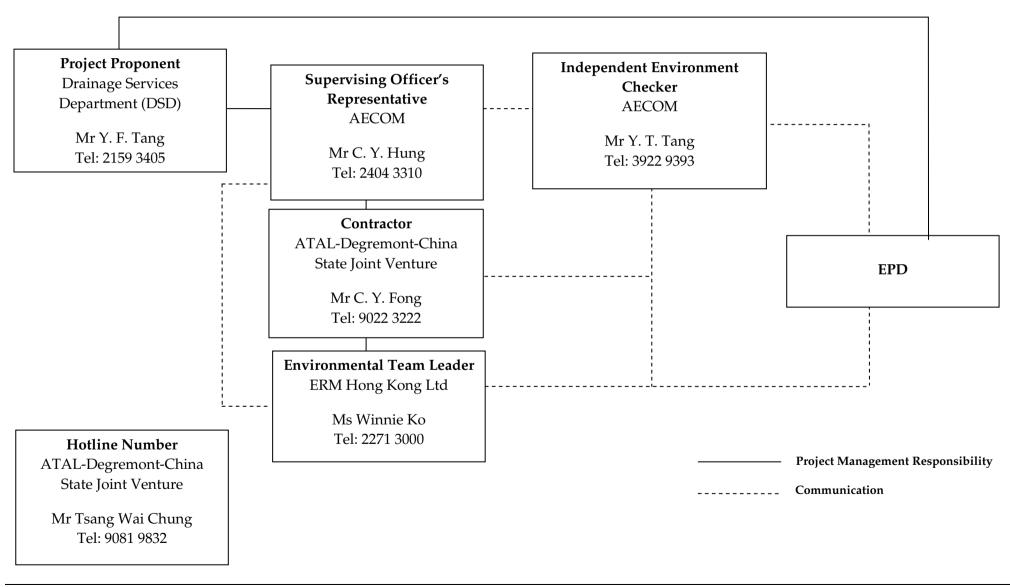

ENVIRONMENTAL RESOURCES MANAGEMENT

Annex D

Locations of Air Quality Monitoring Stations

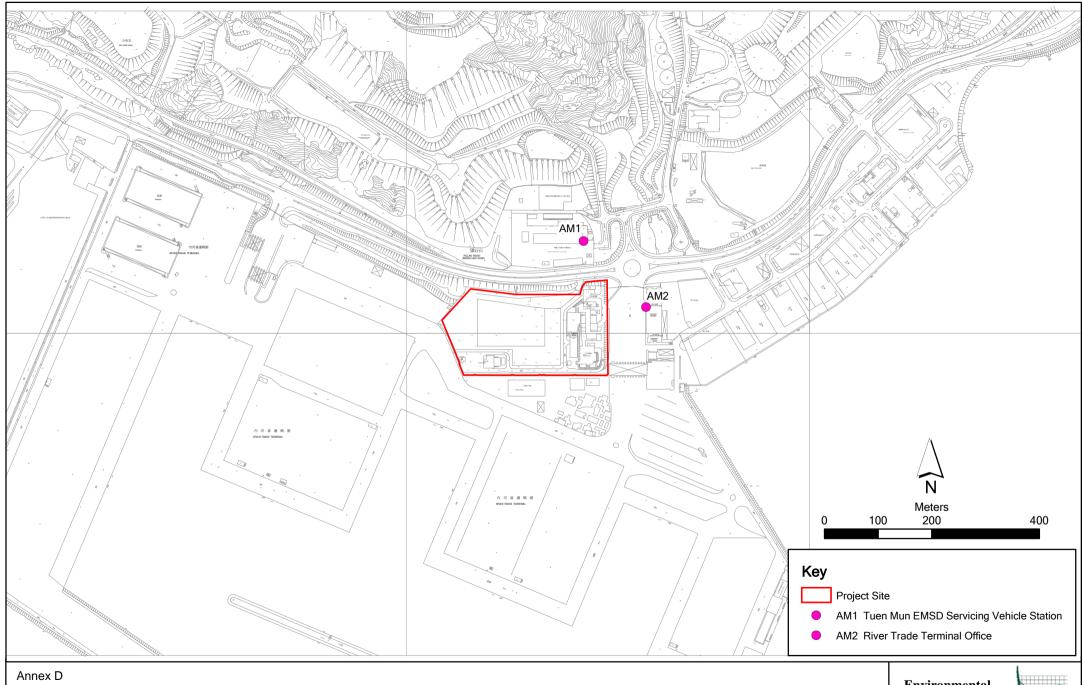

Contract No. DC/2008/03 Design, Build and Operate of Pillar Point Sewage Treatment Works

Environmental Resources Management





AM1 – Tuen Mun EMSD Servicing Vehicle Station



AM2 - River Trade Terminal Office

Annex E

Monitoring Schedule of Reporting Month and Next Month

Contract No. DC/2008/03 - Design, Build and Operate Pillar Point Sewage Treatment Works (Tuen Mun EMSD Servicing Vehicle Station - AM1 & River Trade Terminal Office - AM2) February 2014

Condens Manday Transfer Thursday Thursday Tilder Caburday													
Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday							
						01-Feb							
						Public Holiday							
02-Feb	03-Feb	04-Feb	05-Feb	06-Feb	07-Feb	08-Feb							
	Public Holiday		3X1-hr & 1X 24-hr TSP										
09-Feb	10-Feb	11-Feb	12-Feb	13-Feb	14-Feb	15-Feb							
		3X1-hr & 1X 24-hr TSP											
16-Feb	17-Feb	18-Feb	19-Feb	20-Feb	21-Feb	22-Feb							
	3X1-hr & 1X 24-hr TSP					3X1-hr & 1X 24-hr TSP							
23-Feb	24-Feb	25-Feb	26-Feb	27-Feb	28-Feb								
					3X1-hr & 1X 24-hr TSP								

Contract No. DC/2008/03 - Design, Build and Operate Pillar Point Sewage Treatment Works (Tuen Mun EMSD Servicing Vehicle Station - AM1 & River Trade Terminal Office - AM2) March 2014

Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday		
Gunday	Wioriday	ruesuay	vveunesday	mursuay	Titlday	01-Mar		
						OT Mai		
02-Mar	03-Mar	04-Mar	05-Mar	06-Mar	07-Mar	08-Mar		
	30							
				3X1-hr & 1X 24-hr TSP				
09-Mar	10-Mar	11-Mar	12-Mar	13-Mar	14-Mar	15-Mar		
			3X1-hr & 1X 24-hr TSP					
16-Mar	17-Mar	18-Mar	19-Mar	20-Mar	21-Mar	22-Mar		
		3X1-hr & 1X 24-hr TSP						
	2414	05.14	20.14	07.14		20.11		
23-Mar	24-Mar	25-Mar	26-Mar	27-Mar	28-Mar	29-Mar		
	0V4 hii 0 4V 04 hii TOD				0V4 b 0 4V 04 b TOD			
	3X1-hr & 1X 24-hr TSP				3X1-hr & 1X 24-hr TSP			
30-Mar	31-Mar							
30-Mai	31-Mai							

Annex F

Calibration Reports for HVSs

TSP Monitoring Equipment

Monitoring	Location	Monitoring Equipment		Last Calibration Da	te Next Calibration Date
Station ID					
24-hr and 1-hr TSF		HVS	Calibrator		
AM1	Tuen Mun EMSD Vehicle Servicing Station	GMW GS-2310 (S/N 7580)	CM-AIR-43 (S/N 0438320)	02 January 2014	02 March 2014
AM2	River Trade Terminal Office	GMW GS-2310 (S/N 1252)	CM-AIR-43 (S/N 0438320)	02 January 2014	02 March 2014

<u>High-Volume TSP Sampler</u> <u>5-Point Calibration Record</u>

Location : EMSD
Calibrated by : K.T.Ho
Date : 02/01/2014

Sampler

Model : GMWS-2310 ACCU-VOL

Serial Number : S/N 7580

Calibration Orfice and Standard Calibration Relationship

Serial Number : 2454

 Service Date
 :
 12 Mar 2013

 Slope (m)
 :
 2.05818

 Intercept (b)
 :
 0.01929

 Correlation Coefficient(r)
 :
 0.99991

Standard Condition

Pstd (hpa) : 1013 Tstd (K) : 298.18

Calibration Condition

Pa (hpa) : 1022 Ta(K) : 288

Resi	istance Plate	dH [green liquid]	Z	X=Qstd	IC	Y
		(inch water)		(cubic meter/min)		
1	18 holes	11.2	3.419	1.652	54	55.17
2	13 holes	9.3	3.116	1.505	48	49.04
3	10 holes	6.6	2.625	1.266	38	38.83
4	7 holes	4.5	2.167	1.044	30	30.65
5	5 holes	2.5	1.615	0.776	20	20.43

Sampler Calibration Relationship

Slope(m):39.621 Intercept(b): -10.135 Correlation Coefficient(r): 0.9995

Checked by: Magnum Fan Date: 06/01/2014

<u>High-Volume TSP Sampler</u> <u>5-Point Calibration Record</u>

Location:River TradeCalibrated by:P.F.YeungDate:02/01/2014

Sampler

Model : GMWS-2310 ACCU-VOL

Serial Number : S/N 1252

Calibration Orfice and Standard Calibration Relationship

 Serial Number
 : 2454

 Service Date
 : 12 Mar 2013

 Slope (m)
 : 2.05818

 Intercept (b)
 : 0.01929

 Correlation Coefficient(r)
 : 0.99991

Standard Condition

Pstd (hpa) : 1013 Tstd (K) : 298.18

Calibration Condition

 $\begin{array}{cccc} Pa \ (hpa) & : & 1022 \\ Ta(K) & : & 288 \end{array}$

Resi	istance Plate	dH [green liquid]	Z	X=Qstd	IC	Y
		(inch water)		(cubic meter/min)		
1	18 holes	11.4	3.450	1.667	66	67.43
2	13 holes	9.4	3.133	1.513	58	59.26
3	10 holes	7.4	2.779	1.341	48	49.04
4	7 holes	4.7	2.215	1.067	36	36.78
5	5 holes	2.7	1.679	0.806	22	22.48

Sampler Calibration Relationship

Slope(m):51.703 Intercept(b): -19.114 Correlation Coefficient(r): 0.9991

Checked by: Magnum Fan Date: 06/01/2014



TISCH ENVIROMENTAL, INC.
145 SOUTH MIAMI AVE.
VILLAGE OF CLEVES, OH 45002
513.467.9000
877.263.7610 TOLL FREE
513.467.9009 FAX
WWW.TISCH-ENV.COM

AIR POLLUTION MONITORING EQUIPMENT

ORIFICE TRANSFER STANDARD CERTIFICATION WORKSHEET TE-5025A

Date - Ma Operator		Rootsmeter Orifice I.I		438320 2454	Ta (K) - Pa (mm) -	293 - 748.03
PLATE OR Run # 1 2 3 4 5	VOLUME START (m3) NA NA NA NA NA NA	VOLUME STOP (m3) NA NA NA NA NA NA	DIFF VOLUME (m3) 1.00 1.00 1.00 1.00	DIFF TIME (min) 1.4750 1.0290 0.9170 0.8740 0.7220	METER DIFF Hg (mm) 3.2 6.4 8.0 8.9 12.8	ORFICE DIFF H2O (in.) 2.00 4.00 5.00 5.50 8.00

DATA TABULATION

Vstd	(x axis) Qstd	(y axis)		Va	(x axis) Qa	(y axis)
0.9967 0.9925 0.9902 0.9891 0.9839	0.6757 0.9645 1.0799 1.1317 1.3627	1.4150 2.0010 2.2372 2.3464 2.8299		0.9957 0.9915 0.9892 0.9881 0.9828	0.6750 0.9635 1.0788 1.1305 1.3613	0.8851 1.2517 1.3995 1.4678 1.7702
Qstd slop intercept coefficie	t (b) = ent (r) =	2.05818 0.01929 0.99991		Qa slope intercept coefficie	(b) =	1.28880 0.01207 0.99991
y axis =	SQRT[H2O(E	a/760)(298/5	[a)]	v axis =	SORT [H2O (T	a/Pall

CALCULATIONS

Vstd = Diff. Vol[(Pa-Diff. Hg)/760](298/Ta)
Qstd = Vstd/Time

Va = Diff Vol [(Pa-Diff Hg)/Pa]
Qa = Va/Time

For subsequent flow rate calculations:

Qstd = $1/m\{ [SQRT(H2O(Pa/760)(298/Ta))] - b\}$ Qa = $1/m\{ [SQRT H2O(Ta/Pa)] - b\}$

Annex G

24-hour and 1-hour TSP Monitoring Results

Annex G - 24-hour and 1-hour TSP Monitoring Results

1-hour TSP Monitoring Results

Station AM1

Date	Start Time	Finish Time	Weather	TSP Concentration (µg/m³)	Action Level (μg/m³)	Limit Level (μg/m³)	Site Conditions / Observations / Remarks	Temperature (°C)	Wind Speed * (m/s)	Sampler ID	Filter ID
05-02-2014	13:10	14:10	Cloudy	102	343	500	Construction work in progress	18.0	*	7580	9545
	14:10	15:10	Cloudy	87	343	500	Construction work in progress	18.0	*	7580	9546
	15:10	16:10	Cloudy	96	343	500	Construction work in progress	18.0	*	7580	9547
11-02-2014	13:10	14:10	Cloudy	64	343	500	Construction work in progress	8.0	*	7580	9570
	14:10	15:10	Cloudy	82	343	500	Construction work in progress	8.0	*	7580	9571
	15:10	16:10	Cloudy	81	343	500	Construction work in progress	8.0	*	7580	9572
17-02-2014	13:10	14:10	Sunny	105	343	500	Construction work in progress	20.0	*	7580	9595
	14:10	15:10	Sunny	95	343	500	Construction work in progress	20.0	*	7580	9596
	15:10	16:10	Sunny	92	343	500	Construction work in progress	20.0	*	7580	9597
22-02-2014	13:10	14:10	Cloudy	103	343	500	Construction work in progress	16.0	*	7580	9620
	14:10	15:10	Cloudy	116	343	500	Construction work in progress	16.0	*	7580	9621
	15:10	16:10	Cloudy	111	343	500	Construction work in progress	16.0	*	7580	9622
28-02-2014	13:10	14:10	Cloudy	138	343	500	Construction work in progress	19.0	*	7580	9645
	14:10	15:10	Cloudy	142	343	500	Construction work in progress	19.0	*	7580	9646
	15:10	16:10	Cloudy	164	343	500	Construction work in progress	19.0	*	7580	9647
			Min.	64		-					

Min. 64 Max. 164 Average 105

^{*} Wind Speed data is presented in the Meteorological Data table

Annex G - 24-hour and 1-hour TSP Monitoring Results

1-hour TSP Monitoring Results

Station AM2

	Start	Finish	Weather	TSP Concentration	Action Level	Limit Level	Site Conditions /	Temperature	Wind Speed *	Sampler	Filter
Date	Time	Time		(μg/m³)	(μg/m³)	(μg/m³)	Observations / Remarks	(℃)	(m/s)	ID	ID
05-02-2014	13:00	14:00	Cloudy	123	383	500	Construction work in progress	18.0	*	1252	9541
	14:00	15:00	Cloudy	111	383	500	Construction work in progress	18.0	*	1252	9542
	15:00	16:00	Cloudy	101	383	500	Construction work in progress	18.0	*	1252	9543
11-02-2014	13:00	14:00	Cloudy	73	383	500	Construction work in progress	8.0	*	1252	9566
	14:00	15:00	Cloudy	74	383	500	Construction work in progress	8.0	*	1252	9567
	15:00	16:00	Cloudy	71	383	500	Construction work in progress	8.0	*	1252	9568
17-02-2014	13:00	14:00	Sunny	103	383	500	Construction work in progress	20.0	*	1252	9591
	14:00	15:00	Sunny	108	383	500	Construction work in progress	20.0	*	1252	9592
	15:00	16:00	Sunny	115	383	500	Construction work in progress	20.0	*	1252	9593
22-02-2014	13:00	14:00	Cloudy	119	383	500	Construction work in progress	16.0	*	1252	9616
	14:00	15:00	Cloudy	114	383	500	Construction work in progress	16.0	*	1252	9617
	15:00	16:00	Cloudy	123	383	500	Construction work in progress	16.0	*	1252	9618
28-02-2014	13:00	14:00	Cloudy	119	383	500	Construction work in progress	19.0	*	1252	9641
	14:00	15:00	Cloudy	146	383	500	Construction work in progress	19.0	*	1252	9642
	15:00	16:00	Cloudy	151	383	500	Construction work in progress	19.0	*	1252	9643
•		•	Min.	71		•			•		

Min. 71

Max. 151

Average 110

^{*} Wind Speed data is presented in the Meteorological Data table

Annex G - 24-hour and 1-hour TSP Monitoring Results

24-hour TSP Monitoring Results

Station AM1

									Sampling				TSP	Action	Limit			
Start		Finish		Weather	Filter	Weight (g)	Elapsed Tim	e Reading	Time	Flow	Rate (n	n³/min)	Conc.	Level	Level	Observations / Remarks	Sampler	Filter
Date	Time	Date	Time		Initial	Final	Initial	Final	(hrs)	Initial	Final	Average	(μg/m³)	(μg/m³)	(μg/m ³)		ID	ID
05-02-2014	16:10	06-02-2014	16:10	Cloudy	2.7966	2.9400	13934.18	13958.18	24	1.28	1.28	1.28	78	183	260	Construction work in progress	7580	9548
11-02-2014	16:10	12-02-2014	16:10	Cloudy	2.7799	2.9121	13961.18	13985.18	24	1.28	1.28	1.28	72	183	260	Construction work in progress	7580	9573
17-02-2014	16:10	18-02-2014	16:10	Sunny	2.7866	2.9311	13988.18	14012.18	24	1.28	1.28	1.28	78	183	260	Construction work in progress	7580	9598
22-02-2014	16:10	23-02-2014	16:10	Cloudy	2.7864	2.9494	14015.18	14039.18	24	1.28	1.28	1.28	88	183	260	Construction work in progress	7580	9623
28-02-2014	16:10	01-03-2014	16:10	Cloudy	2.7590	2.9000	14042.18	14066.18	24	1.28	1.28	1.28	76	183	260	Construction work in progress	7580	9648

Min. 72 Max. 88 Average 79

24-hour TSP Monitoring Results

Station AM2


									Sampling				TSP	Action	Limit			
Start		Finish		Weather	Filter	Weight (g)	Elapsed Tim	ne Reading	Time	Flow	/ Rate (n	n³/min)	Conc.	Level	Level	Observations / Remarks	Sampler	Filter
Date	Time	Date	Time		Initial	Final	Initial	Final	(hrs)	Initial	Final	Average	(μg/m³)	(μg/m ³)	(μg/m ³)		ID	ID
05-02-2014	16:00	06-02-2014	16:00	Cloudy	2.793	2.9331	23728.20	23752.20	24	1.26	1.26	1.26	77	192	260	Construction work in progress	1252	9544
11-02-2014	16:00	12-02-2014	16:00	Cloudy	2.7705	2.8921	23755.20	23779.20	24	1.26	1.26	1.26	67	192	260	Construction work in progress	1252	9569
17-02-2014	16:00	18-02-2014	16:00	Sunny	2.7815	2.9090	23782.20	23806.20	24	1.26	1.26	1.26	70	192	260	Construction work in progress	1252	9594
22-02-2014	16:00	23-02-2014	16:00	Cloudy	2.7822	2.9447	23809.20	23833.20	24	1.26	1.26	1.26	90	192	260	Construction work in progress	1252	9619
28-02-2014	16:00	01-03-2014	16:00	Cloudy	2.7827	2.9600	23836.20	23860.20	24	1.26	1.26	1.26	98	192	260	Construction work in progress	1252	9644

Min. 67
Max. 98
Average 80


Meteorological Data Extracted from the Hong Kong Observatory

			Tue	n Mun Station		
Date	Weather	Average Air Temperature (°C)	Average Relative Humiditiy (%)	Total Rainfall (mm)	Average Wind Speed (km/h)	Wind Direction
05-02-2014	Cloudy	18.0	74-94	trace	9.0	N
06-02-2014	Cloudy	19.0	77-92	trace	11.0	SE
11-02-2014	Cloudy	8.0	63-78	trace	6.0	N
12-02-2014	Cloudy	9.0	75-96	0.4	8.0	N
17-02-2014	Sunny	18.0	84-99	0.0	10.0	N
18-02-2014	Sunny	17.0	75-99	trace	6.0	N
22-02-2014	Cloudy	15.0	64-85	0.2	12.0	N
23-02-2014	Cloudy	16.0	65-87	0.0	11.0	N
28-02-2014	Cloudy	18.0	84-90	trace	9.0	S-N
01-03-2014	Cloudy	19.0	84-97	0.0	7.0	S-N


1-hr TSP Levels for the Past 4 Months AM1 (Tuen Mun EMSD Vehicle Servicing Station)

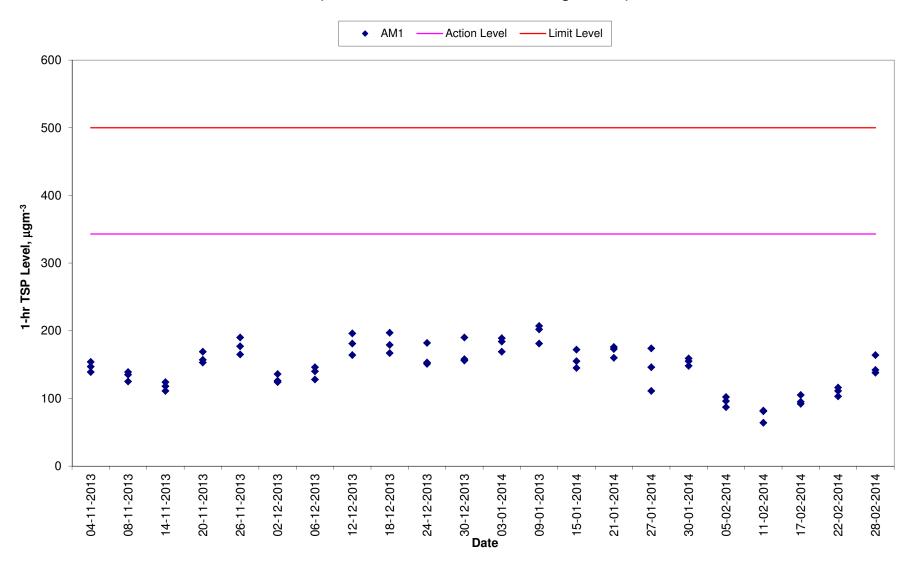


1-hr TSP Levels for the Past 4 Months AM2 (River Trade Terminal Office)

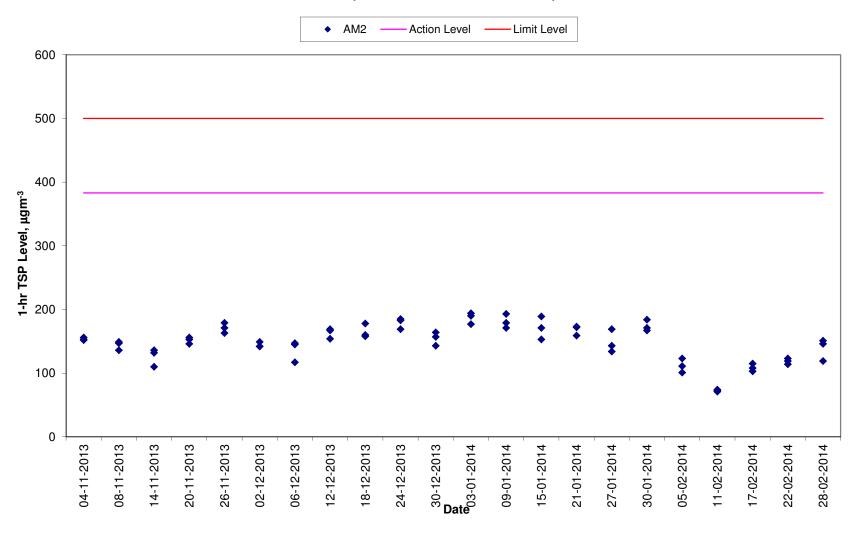

24-hr TSP Levels for the Past 4 Months AM1 (Tuen Mun EMSD Vehicle Servicing Station)

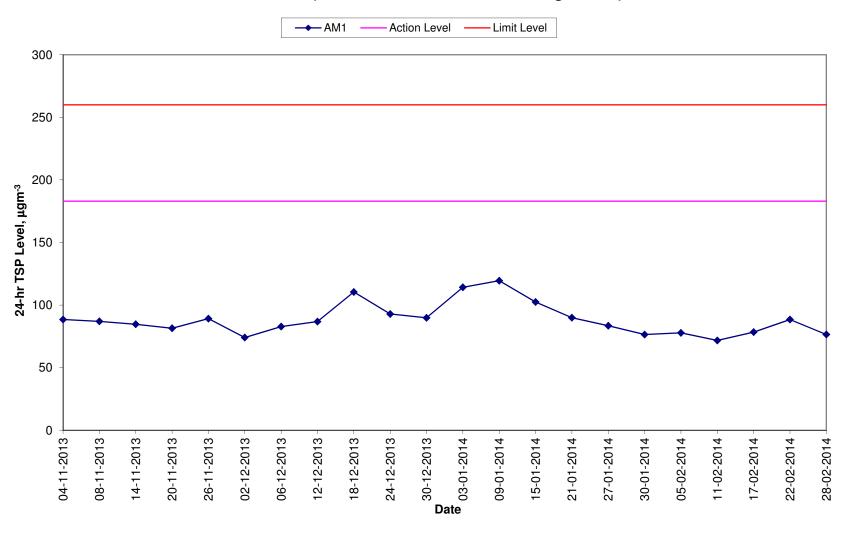

24-hr TSP Levels for the Past 4 Months AM2 (River Trade Terminal Office)

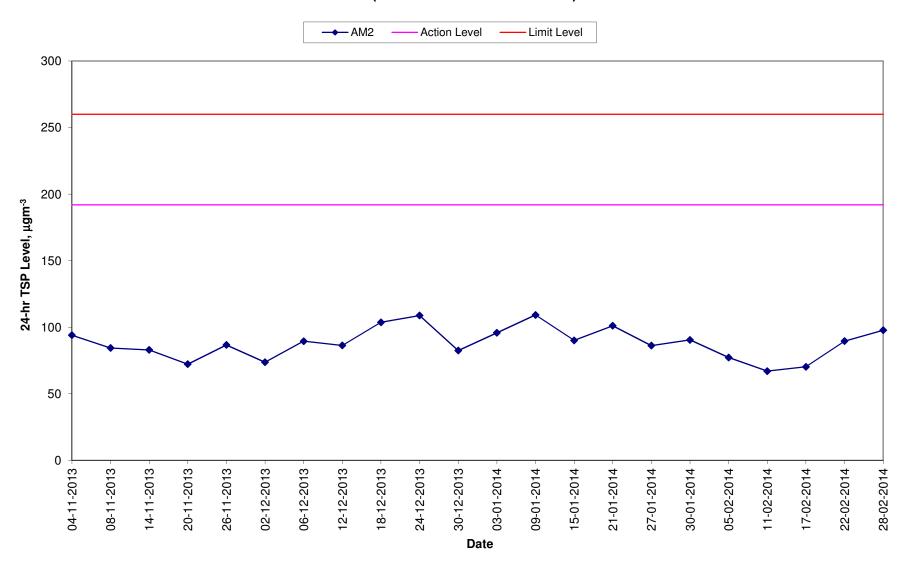

Annex H

Event/Action Plan for Air Quality Monitoring

Table H1 Event Action Plan for Air Quality Monitoring

Action Level/Limit Level	Environmental Team Leader (ETL)	Independent Environmental Checker (IEC)	Supervising Officer Representative (SOR)	Contractor
Action Level				
Exceedance for one sample	 Identify source, investigate the causes of complaint and propose remedial measures; Inform IEC and SOR; Repeat measurement to confirm findings; Increase monitoring frequency to daily. 	 Check monitoring data submitted by ET; Check Contractor's working method. 	Notify Contractor and DSD.	 Rectify any unacceptable practice; Amend working methods if appropriate.
Exceedance for two or more consecutive samples	 Identify source; Inform IEC and SOR; Advise the SOR on the effectiveness of the proposed remedial measures; Repeat measurements to confirm findings; Increase monitoring frequency to daily; Discuss with IEC and Contractor on remedial actions required; If exceedance continues, arrange meeting with IEC and SOR; If exceedance stops, cease additional monitoring. 	 Check monitoring data submitted by ET; Check Contractor's working method; Discuss with ET and Contractor on possible remedial measures; Advise the ET on the effectiveness of the proposed remedial measures; Supervise Implementation of remedial measures. 	 Confirm receipt of notification of exceedance in writing; Notify Contractor and DSD; Ensure remedial measures properly implemented. 	 Submit proposals for remedial actions to IEC within three working days of notification; Implement the agreed proposals; Amend proposal if appropriate.

Action Level/Limit Level	Environmental Team Leader (ETL)	Independent Environmental Checker (IEC)	Supervising Officer Representative (SOR)	Contractor
Limit Level				
Exceedance for one sample	 Identify source, investigate the causes of exceedance and propose remedial measures; Inform IEC, SOR, DSD and EPD; Repeat measurement to confirm finding; Increase monitoring frequency to daily; Assess effectiveness of Contractor's remedial actions and keep IEC, EPD, DSD and SOR informed of the results. 	 Check monitoring data submitted by ET; Check Contractor's working method; Discuss with ET and Contractor on possible remedial measures; Advise the SOR on the effectiveness of the proposed remedial measures; Supervise implementation of remedial measures. 	 Confirm receipt of notification of exceedance in writing; Notify Contractor; Ensure remedial measures properly implemented. 	 Take immediate action to avoid further exceedance; Submit proposals for remedial actions to IEC within three working days of notification; Implement the agreed proposals; Amend proposal if appropriate.
Exceedance for two or more consecutive samples	 Notify IEC, SOR, DSD and EPD; Identify source; Repeat measurement to confirm findings; Increase monitoring frequency to daily; Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented; Arrange meeting with IEC and SOR to discuss the remedial actions to be taken; Assess effectiveness of Contractor's remedial actions and keep IEC, EPD, DSD and SOR informed of the results; If exceedance stops, cease additional monitoring. 	 Discuss amongst SOR, ET, and Contractor on the potential remedial actions; Review Contractor's remedial actions whenever necessary to assure their effectiveness and advise the SOR accordingly; Supervise the implementation of remedial measures. 	 Confirm receipt of notification of exceedance in writing; Notify Contractor; In consolidation with the IEC, agree with the Contractor on the remedial measures to be implemented; Ensure remedial measures properly implemented; If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated. 	 Take immediate action to avoid further exceedance; Submit proposals for remedial actions to IEC within three working days of notification; Implement the agreed proposals; Resubmit proposals if problem still not under control; Stop the relevant portion of works as determined by the SOR until the exceedance is abated.

Annex I

Implementation Schedule of Mitigation Measures

Annex I Summary of Mitigation Measures Implementation Schedule

Type of Impact	Environmental Protection Measures	Location/ Timing	Status			
	Summary of Environmental Mitigation Measures in the EIA and EM&A Manual					
Construction Pha	se					
Air Quality	Dust mitigation measures stipulated in <i>the Air Pollution Control</i> (<i>Construction Dust</i>) <i>Regulation</i> shall be incorporated to control Post emission. Notice shall be given to authority prior to commencing of work.	Work sites / during construction period	Notice of works commencement was submitted to EPD on 3 August 2010.			
Water Quality	The practices outlined in ProPECC PN 1/94 Construction Site Drainage should be adopted. It is recommended to install perimeter channels in the works areas to intercept runoff as site boundary prior to the commencement of any earthwork. To prevent storm runoff from washing across exposed soil surfaces, intercepting channels should be provided. Drainage channels are also required to convey site runoff to sand/silt traps and oil interceptors. Provision of regular cleaning and maintenance can ensure the normal operation of these facilities throughout the construction period. Any practical options for the diversion and re-alignment of drainage should comply with both engineering and environmental requirements in order to ensure adequate hydraulic capacity of all drains.	Work site/During the construction period				
Water Quality	There is a need to apply to EPD for a discharge license under the WPCO for discharging effluent from the construction site. The discharge quality is required to meet the requirements specified in the discharge license. All the runoff and wastewater generated from the works areas should be treated so that it satisfies all the standards listed in the TM-DSS. Reuse and recycling of the treated effluent can minimize water consumption and reduce the effluent discharge volume. The beneficial uses of the treated effluent may include dust suppression, wheel washing and general cleaning. If monitoring of the treated effluent quality from the works areas is required during the construction phase of the Project, the monitoring should be carried out in accordance with the WPCO license which is under the ambit of regional office (RO) of EPD.	Work site/During the construction period	√ Discharge licence was awarded by EPD on 7 December 2010.			
Water Quality	The construction programme should be properly planned to minimize soil excavation, if any, in rainy seasons. This prevents soil erosion from	Work site/During the construction period	V			

Type of Impact	Environmental Protection Measures	Location/ Timing	Status
•	exposed soil surfaces. Any exposed soil surfaces should also be properly protected to minimize dust emission. In areas where a large amount of exposed soil exists, earth bunds or sand bags should be provided. Exposed stockpiles should be covered with tarpaulin or impervious sheets at all times. The stockpiles of materials should be placed at locations away from any stream course so as to avoid releasing materials into the water bodies. Final surfaces of earthworks should be compacted and protected by permanent work. It is suggested that haul roads should be paved with concrete and the temporary access roads protected using crashed stone or gravel, wherever practicable. Wheel washing facilities should be provided at all site exists to ensure that earth, mud and debris would not be carried out of the works areas by vehicles.		
Water Quality	Good sites practices should be adopted to clean the rubbish and litter on the construction sites so as to prevent the rubbish and litter from spreading from the site area. It is recommended to clean the construction sites on a regular basis.	Work site/During the construction period	<>
Water Quality	The presence of construction workers generates sewage. It is recommended to provide sufficient chemical toilets in the works areas. The toilet facilities should be more than 30m from any watercourse. A licensed water collector should be deployed to clean the chemical toilets on a regular basis. The construction workers can also make use of the existing toilet facilities within the PPSTW as necessary.	Work site/During the construction period	V
Water Quality	Notices should be posted at conspicuous locations to remind the workers not to discharge any sewage or wastewater into the nearby environment during the construction phase of the project. Regular environmental audit on the construction phase of the project. Regular environmental audit on the construction site can provide an effective control of any malpractices and can achieve continual improvement of environmental performance on site.	Work site/During the construction period	V
Waste Management	Contractor must register as a chemical waste producer if chemical wastes would be produced from the construction activities. The Waste Disposal Ordinance (Cap 354) and its subsidiary regulations in particular the Waste Disposal (Chemical Waste) (General) Regulation	Work site/During the construction period	V

Type of Impact	Environmental Protection Measures	Location/ Timing	Status
-	should be observed and complied with for control of chemical wastes.		
Waste Management	Any service shop and maintenance facilities should be located on hard standings within a bunded area, and stumps and oil interceptors should be provided. Maintenance of vehicles and equipment involving activities with potential for leakage and spillage should only be undertaken within the areas appropriately equipped to control these discharges.	Work site/During the construction period	7
Waste Management	Disposal of chemical wastes should be carried out in compliance with the Waste Disposal Ordinance. The Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes published under the Waste Disposal Ordinance details the requirements to deal with the chemical wastes. General requirements are given as follows: • Suitable containers should be used to hold the chemical wastes to avoid leakage or spillage during storage, handling and transport. • Chemical waste containers should be suitably labelled, to notify and warn the personnel who are handling the wastes, to avoid accidents. • Storage area should be selected at a safe location on site and adequate space should be allocated to the storage area.	Work site/During the construction period	
Waste Management	 Good Site Practices Recommendations for good site practices during the construction activities include: Nomination of an approved person, such as a site manager, to be responsible for good site practices, arrangements for collection and effective disposal to an appropriate facility, of all wastes generated at the site Training of site personnel in proper waste management and chemical handling procedures Provision of sufficient waste disposal points and regular collection of waste Appropriate measures to minimise windblown litter and dust during transportation of waste by either covering trucks or by 	Work site/During the construction period	

Type of Impact	Environmental Protection Measures	Location/ Timing	Status
	 transporting wastes in enclosed containers Regular cleaning and maintenance programme for drainage systems, sumps and oil interceptors. Separation of chemical wastes for special handling and appropriate treatment at the Chemical Waste Treatment Facility. 		
Waste Management	 Waste Reduction Measures Waste reduction is best achieved at the planning and design stage, as well as by ensuring the implementation of good site practices. Recommendations to achieve waste reduction include: Segregation and storage of different types of waste in different containers, skips or stockpiles to enhance reuse or recycling of materials and their proper disposal. Encourage collection of aluminium cans by providing separate labelled bins to enable this waste to be segregated from other general refuse generated by the work force Proper storage and site practices to minimise the potential for damage or contamination of construction materials. Plan and stock construction materials carefully to minimise amount of waste generated and avoid unnecessary generation of waste. 	Work site/During planning & design stage, and construction stage	
Waste Management	General Refuse General refuse should be stored in enclosed bins or compaction units separate from C&D material. A reputable waste collector should be employed by the contractor to remove general refuse from the site, separately from C&D material. Preferably an enclosed and covered area should be provided to reduce the occurrence of 'wind blown' light material.	Work site / During the construction period	
Waste Management	Construction and Demolition Material In order to minimise the impact resulting from collection and transportation of C&D material for off-site disposal, the excavated	Work site / During design stage & construction period	V

Type of Impact	Environmental Protection Measures	Location/ Timing	Status
Impuct	material generated from site formation works for the proposed new facilities and units at the STW should be reused on-site as far as practicable. The surplus excavated material should be disposed of at the designated public fill reception facility, as agreed with the Secretary of the Public Fill Committee, for other beneficial uses.		
Waste Management	 Mitigation measures and good site practices should be followed to control potential environmental impact from handling and transportation of C&D material. The mitigation measures include: Where it is unavoidable to have transient stockpiles of C&D material pending collection for disposal, the transient stockpiles shall be located away from waterfront or storm drains as far as possible. Open stockpiles of construction materials or construction wastes onsite should be covered with tarpaulin or similar fabric. Skip hoist for material transport should be totally enclosed by impervious sheeting. Every vehicle should be washed to remove any dusty materials from its body and wheels before leaving a construction site The area where vehicle washing takes place and the section of the road between the washing facilities and the exit point should be paved with concrete, bituminous materials or hardcores. The load of dusty materials carried by vehicle leaving a construction site should be covered entirely by clean impervious sheeting to ensure dust materials do not leak from the vehicle. All dusty materials should be sprayed with water prior to any loading, unloading or transfer operation so as to maintain the dusty materials wet. The height from which excavated materials are dropped should be controlled to a minimum practical height to limit fugitive dust generation from unloading. 	Work site / During design stage & construction period	
Waste Management	When disposing C&D material at a public filling facility, it shall be noted that the material shall only consist of earth, building debris and broken rock and concrete. The material shall be free from marine mud, household refuse, plastic, metals, industrial and chemical waste, animal	Work site/During design stage & construction period	√ ·

Type of Impact	Environmental Protection Measures	Location/ Timing	Status
	and vegetable matter, and other material considered to be unsuitable by the Filling Supervisor. In order to monitor the disposal of the surplus C&D material at the designed public fill reception facility and to control fly tipping, a trip-ticket system should be included as one of the contractual requirements and implemented by an Environmental Team undertaking the Environmental Monitoring and Audit work with reference to the ETWB TCW No. 31/2004 "Trip Ticket System for Disposal of Construction and Demolition Materials" as attached in Appendix 7-1. An Independent Environmental Checker should be responsible for auditing the results of the system.		
Waste Management	If chemical wastes are produced at the construction site, the Contractor would be required to register with the EPD as a Chemical Waste Producer and to follow the guidelines stated in the Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes. Good quality containers compatible with the chemical wastes should be used, and incompatible chemicals should be stored separately. Appropriate labels should be securely attached on each chemical waste container indicating the corresponding chemical characteristics of the chemical waste, such as explosive, flammable, oxidizing, irritant, toxic, harmful, corrosive, etc. The Contractor shall use a licensed collector to transport and dispose of the chemical wastes, to either the Chemical Waste Treatment Centre, or another licensed facility, in accordance with the Waste Disposal (Chemical Waste) (General) Regulation.	Work site / During the construction period	
Landscape & Visual	Temporary Tree Nurseries Temporary tree nurseries may be set up for the transplanted tree and proposed trees at an early stage to allow small trees to grow during the construction periods. By the time when planting area becomes available, trees mature and increase in trunk & spread size. They will require minimal pruning and suffer much less damage during transplanting when comparing the travel distance from an on-site nursery to an off-site nursery. Besides, these trees may also be positioned as visual mitigation during	Work site/During design stage & construction period	√. A tree nursery has been set up off-site near the site office.

Type of Impact	Environmental Protection Measures	Location/ Timing	Status
	the construction period.		
Landscape & Visual	No-intrusion Zone To maximize protection to existing trees and ground vegetation, construction contracts may designate "No-intrusion Zone" to various areas within the site boundary with rigid and durable fencing for each individual no-intrusion zone. The contractor should close monitor and restrict the site working staff not to enter the "no-intrusion zone", even for non-direct construction activities and storage of equipment.	Work site/During design stage & construction period	
Landscape & Visual	Hoarding Hoarding or boundary fencing for construction shall be considered. It should be sensitively designed, subtle, camouflaged and more 'permeable' so that they fit into the existing environment when looking from outside.	Work site/During design stage & construction period	√
Landscape & Visual	Dust and Erosion Control for Exposed Soil Excavation works and demolition of existing building blocks and which will be highly visible form surrounding areas should be well planned and with precautions to suppress dust. Exposed soil shall be covered or 'camouflaged' and watered often. Areas that are expected to be left with bare soil for a long period of time after excavation shall be properly covered with suitable protective fabric. Silt and erosion shall be controlled by ground barriers around the slope cutting area	Work site/During design stage & construction period	
Landscape & Visual	Existing Tree Record Inventory All retained trees should be record photographically at the commencement of the Contract, and carefully protected during the construction period. Detailed tree protection specification shall be allowed and included in the Contract Specification, which specifying the tree protection requirement, submission and approval system, and the tree monitoring system.	Work site/During design stage & construction period	V

Type of Impact	Environmental Protection Measures	Location/ Timing	Status
Landscape & Visual	Construction Light All security floodlights for construction sites shall be equipped with adjustable shield, frosted diffusers and reflective covers, and be carefully controlled to minimize light pollution and night-time glare to nearby residences and GIC users. The Contractor shall consider other security measures which shall minimize the visual impacts.	Work site / During design stage & construction period	√
Landscape & Visual	Tree Transplanting Apart from the 18 numbers of "Leucaena leucocephala", which are proposed to be felled in accordance with ETWB TCW No. 3/2006, all the affected trees shall be transplanted. Where practicable, trees shall be directly transplanted to permanent on-site locations. The location of the transplanted tree is shown in Figure 8.9.1.	Work site / During design stage & construction period	√.
Landscape & Visual	Tree Compensation Ratio The total number of compensatory trees planted in the project area shall not be less than 1:1 ratios by new trees. Required numbers and locations of compensatory trees shall be determined and agreed with Government during the tree felling application process under ETWCTC 3/2006. Compensatory trees shall be at least heavy standard size to create "immediate" greening effect. 81 numbers of "Cassia surattensis" will be provided as the additional compensatory planting for loss of greenery in the area due to removal of the affected trees. The location of the additional compensatory planting is shown in Figure 8.9.1.	Work site / During design stage & construction period	N/A
Landscape & Visual	Re-use of Existing Soil and Advance formation of Planting Area Existing topsoil shall be re-used where possible for new planting areas within the project. Advance formation of planting area and early implementation of the plating works can minimize adverse impact on trees. The construction program shall consider using the soil removed from one phase for backfilling another. Suitable storage ground, gathering ground and mixing ground may be set up on-site as necessary.	Work site / During design stage & construction period	V

Type of Impact	Environmental Protection Measures	Location/ Timing	Status
Landscape & Visual	Establishment Period 12 month establishment period for the soft landscape works will be allowed in the main contract. Most construction contracts in Hong Kong require the Contractor to carry out routine horticultural operations, including watering, pruning, weeding, pest control, replacement of dead plants etc. to ensure healthy establishment of new planting during a 12 month establishment period. This period also serves as a kind of warranty / guarantee on the quality of the plants supplied and installed by the Contractor. Monthly monitoring during the first year of establishment period is recommended.	Work site/During operation period	N/A. To be implemented during operation phase of Project.
Landscape & Visual	Re-instatement of excavated Area All excavated area and disturbed area for utilities diversion, temporary road diversion, and pipeline woks will be reinstated to former conditions, subject to applicable Government Standards.	Work site / During design stage & operation period	N/A. To be implemented during operation phase of Project.
Landscape & Visual	Appearance and Greening for the proposed structures Compatible design, construction materials and surface finishes of the proposed structure should match with the nearby existing external appearance of PPSTW buildings for achieving visual uniformity. Finishing materials shall have due consideration to form, basic color, color/tone variation, micro-and macro-texture, and reflectivity/light absorbance to avoid glare. Planting, such as turf, low groundcovers and climbers, may also be planted on top of these elements to provide greening and aesthetic effect.	Work site / During design stage & operation period	N/A. To be implemented during operation phase of Project.
Summary of Key	Environmental Mitigation Measures in Contract Requirements		
Air Quality	Only Ultra-low-sulphur diesel (ULSD) should be used for all diesel- operated plants and equipments on site	Work sites / during construction period	V
Air Quality and Noise	Plants and equipments of good operation conditions should be used on site.	Work sites / during construction period	V
Noise	No diesel hammers should be used for piling works	Work sites / during construction period	√
Noise	Construction Noise Permits (CNP) should be applied for works conducted outside non-restricted hours.	Work sites / during construction period	√
Noise	Quiet construction equipments and the quietest practicable working	Work sites / during construction period	$\sqrt{}$

Type of Impact	Environmental Protection Measures	Location/ Timing	Status
	methodologies should be adopted for works whenever feasible. Noise labels should be provided for air compressors. Hoods and cover panels of generators and air compressors should be closed during operation. Noise labels should be provided for air compressors and hand-held percussive breakers.		
Waste Management	Temporary works construction on site should minimize the use of timber to reduce the quantity of C&D waste generated during works period.	Work sites / during construction period	√
Landscape and Visual	Retained or to-be-transplanted trees on site should be properly protected from physical damages and soil compacts with temporary fencing or hessian armouring whenever feasible.	Work sites / during construction period	<>

Remark:

- √ Compliance of Mitigation Measures
- Compliance of Mitigation but need improvement
- x Non-compliance of Mitigation Measures
- Non-compliance of Mitigation Measures but rectified by ATAL-Degrémont-China State JV
- Δ Deficiency of Mitigation Measures but rectified by ATAL-Degrémont-China State JV
- N/A Not Applicable in Reporting Period

Annex J

Waste Flow Table

Contract No. : DC/2008/03 - Design, Build and Operate Pillar Point Sewage Treatment Works Monthly Summary Waste Flow Table

	Actual	Quantities of	Inert C&D Materials Ge		te 13)		tities of Non	i-inert C&D Mat (see No	,	on Waste) Generated
Month	Total Quantity Generated	Reused in the Contract	Reused in other Projects	Hard Rocks & Large Broken Concrete	Disposed as Public Fill	Metals (see Note 1)	Paper/ cardboard packaging (see Note 1)	Plastics (see Note 2)	Chemical Waste	Others, e.g. general refuse (see Note 3)
	tonne	tonne	tonne	tonne	tonne	kilogram	kilogram	kilogram	Litre	tonne
Nov 2010	2,248.00	0.00	0.00	55.00	2248.00	60.00	100.00	0.00	0.00	18.05 (see Note 4)
Dec 2010	11,314.00 (see Note 4)	0.00	0.00	225.00	11314.00	100.00	120.00	20.00	0.00	28.40 (see Note 4)
Jan 2011	58,383.00 (see Note 4)	0.00	0.00	3,000.00	58,382.90	250.00	280.00	60.00	0.00	4.59 (see Note 4)
Sub-total	71,945.00	0.00	0.00	3280.00	71944.90	410.00	500.00	80.00	0.00	51.04
Feb 2011	12,855.00	0.00	0.00	1,050.00	12,854.70	100.00	150.00	50.00	0.00	2.43 (see Note 4)
Mar 2011	22,859.00	0.00	0.00	1,500.00	22,858.70	150.00	180.00	55.00	0.00	9.02
Apr 2011	8,547.00 (see Note 7)	0.00	5,684.00(see Note 5,7)	550.00	2,863.30	50.00	30.00	15.00	0.00	5.78
Sub-total	44,261.00	0.00	5684.00	3100.00	38576.70	300.00	360.00	120.00	0.00	17.23
May 2011	6,293.00 (see Note 7)	0.00	11.00 (see Note 5, 7)	425.00	6,282.00 (see Note 7)	45.00	25.00	10.00	360.00 (see Note 7)	8.83
Jun 2011	4,587.00 (see Note 7)	0.00	0.00 (see Note 7)	313.00	4,586.00 (see Note 7)	40.00	30.00	15.00	0.00	7.10
Jul 2011	523.00	0.00	0.00	25.00	522.90	15.00	5.00	10.00	0.00	7.20
Sub-total	11,403.00	0.00	11.00	763.00	11391.50	100.00	60.00	32.00	360.00	23.13
Aug 2011	571.00 (see Note 11)	0.00	0.00	50.00	571.00 (see Note 11)	0.00	0.00	15.00	450.00 (see Note 8)	6.12
Sept 2011	235.00	0.00	0.00	25.00	235	20.00	0.00	0.00	0.00	12.15 (see Note 9)
Oct 2011	5,705.00 (see Note 10)	0.00	0.00	650.00	5,705.00 (see Note 10)	100.00	0.00	0.00	0.00	2.98
Sub-total	6,511.00	0.00	0.00	725.00	6511.00	120.00	0.00	15.00	450.00	21.25
Nov 2011	6,294.00	0.00	0.00	775.00	6,294.00	50.00	0.00	0.00	0.00	44.84
Dec 2011	3,011.00	0.00	0.00	263.00	3,011.00	20.00	0.00	0.00	0.00	17.14
Jan 2012	349.00	64.00	0.00	25.00	284.60	20.00	150.00	0.00	0.00	49.01

	Actua	al Quantities of	Inert C&D Materials (I	ated	Actual Qua	ntities of Non-inert Co	&D Materia	ls (Construct	tion Waste) Generated	
Month	Total Quantity Generated	Reused in the Contract	Reused in other Projects	Hard Rocks & Large Broken Concrete	Disposed as Public Fill	Metals (see Note 1)	Paper/ cardboard packaging (see Note 1)	Plastics (see Note 2)	Chemical Waste	Others, e.g. general refuse (see Note 3)
	tonne	tonne	tonne	tonne	tonne	kilogram	kilogram	kilogram	Litre	tonne
Sub-total	9,654.00	64.00	0.00	1063.00	9589.60	90.00	150.00	0.00	0.00	110.99
Feb 2012	3,371.00	30.00	0.00	2,810.00	3,341.00	150.00	0.00	0.00	0.00	48.72
Mar 2012	6,460.00	3,000.00	0.00	625.00	3,459.70	30.00	0.00	0.00	0.00	41.10
Apr 2012	3,774.00	3,000.00	0.00	250.00	774.40	40.00	0.00	0.00	0.00	40.01
Sub-total	13,605.00	6,030.00	0.00	3685.00	7575.10	220.00	0.00	0.00	0.00	129.83
May 2012	7,936.00	5,600.00	0.00	750.00	2,336.20	40.00	0.00	10.00	0.00	75.19
Jun 2012	13,091.00	7,500.00	0.00	875.00	5,590.80	40.00	35.50	8.00	0.00	66.74
Jul 2012	11,972.00	8,600.00	0.00	825.00	3,372.50	40.00	36.40	5.00	0.00	100.50
Sub-total	32,999.00	21,700.00	0.00	2450.00	11299.50	120.00	70.90	23.00	0.00	242.43
Aug 2012	11,660.00	11,000.00	0.00	950.00	659.80	30.00	10.00	6.00	0.00	78.77
Sept 2012	3,055.00	1,500.00	0.00	920.00	1,555.38	30.00	40.00	5.00	0.00	118.80
Oct 2012	2,657.00	200.00	0.00	500.00	2,457.01	30.00	59.40	8.00	0.00	124.04
Sub-total	17,372.00	12,700.00	0.00	2370.00	4672.19	90.00	109.40	19.00	0.00	321.61
Nov 2012	2,691.00	250.00	0.00	750.00	2,441.01	50.00	25.00	10.00	0.00	128.08
Dec 2012	4,319.00	400.00	0.00	200.00	3,919.13	60.00	20.00	15.00	0.00	165.28
Jan 2013	4,442.00	100.00	0.00	200.00	4,341.56	200.00	40.00	20.00	0.00	111.23
Sub-total	11,452.00	750.00	0.00	1150.00	10701.70	310.00	85.00	45.00	0.00	404.59
Feb 2013	1,286.00	85.00	0.00	50.00	1,201.23	180.00	35.00	16.00	0.00	99.44
Mar 2013	900.00	900.00	0.00	120.00	0.00	120.00	45.00	10.00	0.00	97.43
Apr 2013	680.00	680.00	0.00	300.00	0.00	22.00	50.00	15.00	0.00	80.21
Sub-total	2866.00	1665.00	0.00	470.00	1201.23	322.00	130.00	41.00	0.00	277.08
May 2013	1443.37	100.00	0.00	1020.00	1343.37	40.00	43.00	9.00	0.00	46.88 (see Note 16)
June 2013	1993.06	50.00	0.00	850.00	1943.06	100.00	60.00	5.00	0.00	53.89

July 2013	1246.64	100.00	0.00	1100.00	1146.64	100.00	60.00	10.00	0.00	71.15
Sub-total	4683.07	250.00	0.00	2970.00	4433.07	240.00	163.00	24.00	0.00	171.92
August 2013	873.73	120.00	0.00	700.00	753.73	50.00	60.00	8.00	0.00	63.95
September 2013	748.43	50.00	0.00	650.00	698.43	40.00	60.00	5.00	0.00	41.28
October 2013	1701.99	45.00	0.00	1500.00	1656.99	20.00	60.00	5.00	0.00	34.79
Sub-total	3324.15	215.00	0.00	2850.00	3109.15	110.00	180.00	18.00	0.00	140.02
November 2013	1602.35	60.00	0.00	1490.00	1542.35	18.00	60.00	50.00	0.00	36.44
December 2013	1357.16	80.00	0.00	1100.00	1277.16	35.00	60.00	50.00	0.00	16.84
January 2014	714.34	20.00	0.00	690.00	694.34	16.00	60.00	97.00	0.00	27.82
Sub-total	3,673.85	160.00	0.00	3,280.00	3,513.85	69.00	180.00	197.00	0.00	81.10
February 2014	944.11	20.00	0.00	900.00	924.11	50.00	60.00	1120.00	0.00	7.66
Total	234692.36	43554.00	5695.00	29056.00	185443.40	2551.00	2048.30	1737.00	810.00	1999.88

Notes:

- (1) Metal and paper/cardboard packaging were collected by recycler for recycling.
- (2) Plastics refer to plastic bottles/containers, plastic sheets/foam from packaging material collected by recycler for recycling.
- (3) General refuse was disposed of at WENT by subcontractors.
- (4) The waste flow data for November and December 2010, January and February 2011 was updated in March 2011based on SOR's comments and has been confirmed by the Contractor.
- (5) The inert C&D materials were reused in the Contract No. EP/SP/58/08 at Tuen Mun Tsang Tsui.
- (6) Chemical waste was collected though the licensed chemical waste collector, Dunwell Ind. (Holdings) Ltd, with the waste collection licence number 7111-757-W0015-WC.
- (7) The waste flow data for April, May and June 2011 was updated in August 2011 based on SOR's comments and has been confirmed by the Contractor.
- (8) The waste flow data of chemical waste for August 2011 was updated in October 2011 based on Contractor's revised waste flow summary.
- (9) The waste flow data of general refuse for September 2011 was updated in November 2011 based on Contractor's revised waste flow summary.
- (10) The waste flow data of C&D material for October 2011 was updated in December 2011 based on Contractor's revised waste flow summary.
- (11) The waste flow data of C&D material for August 2011 was updated in January 2011 based on SOR's comments and has been confirmed by the Contractor.
- (12) The waste flow data of metal and paper/cardboard packaging for June 2011 was revised in August 2012.
- (13) The quantity of inert and non-inert C&D material generated from May 2012 to December and imported fill material was updated by the Contractor on 6 November 2012.
- (14) The quantity of Rocks & Broken Concrete from November 2010 to November 2012 was updated by the Contractor on 12 December 2012.
- (15) The quantity of C&D material reused in this Contract in Oct, Nov and Dec 2012 were updated by the Contractor on 5 January 2013.
- (16) The quantity of general refuse in this Contract for May 2013 was updated by the Contractor in June 2013.

Annex K

Environmental Complaint, Environmental Summons and Persecution Log

Annex K Cumulative Complaint and Summons/Prosecutions Log

Reporting Month	Number of Complaints in Reporting Month	Number of Summons/Prosecutions in Reporting Month
November 2010	0	0
December 2010	0	0
January 2011	0	0
February 2011	0	0
March 2011	0	0
April 2011	0	0
May 2011	0	0
June 2011	0	0
July 2011	0	0
August 2011	0	0
September 2011	0	0
October 2011	0	0
November 2011	0	0
December 2011	0	0
January 2012	0	0
February 2012	0	0
March 2012	0	0

Reporting Month	Number of Complaints in Reporting Month	Number of Summons/Prosecutions in Reporting Month
April 2012	0	0
May 2012	0	0
June 2012	0	0
July 2012	0	0
August 2012	0	0
September 2012	0	0
October 2012	0	0
November 2012	0	0
December 2012	0	0
January 2013	0	0
February 2013	0	0
March 2013	0	0
April 2013	0	0
May 2013	0	0
June 2013	0	0
July 2013	0	0
August 2013	0	0
September 2013	0	0
October 2013	0	0
November 2013	0	0

Reporting Month	Number of Complaints in Reporting Month	Number of Summons/Prosecutions in Reporting Month
December 2013	0	0
January 2014	0	0
February 2014	0	0
Overall Total	0	0

Annex L

Construction Programme of the Project

Activity ID	Description	Original Ouration	Early Start	Early Finish	Late Start	Late Finish	Actual Start	Actual Finish	Total Float						2014							2015	
		Juration	Start	Finish	Start	Finish	Start	Finish	rioat	FEB	MAR	APR	MAY	JUN		AUG	SEP	ОСТ	NOV	DEC	JAN	2015 FEB	M/
Commonoament	and Completion of Works									ľ					1	1				1			1
Contract Dates	and Completion of Works									i		i	i	i	i	i	i	i	i	i	i i		i
KMD000120	Completion of Design and Construction Works	0	1	03JUN2014	1	13MAY2014			-21d	I		1		 ♦ Complet	tion of Design	and Construc	ction Works		1	I			
KMD000140	Completion of Interim Operation (extended)	0		03JUN2014		13MAY2014			-21d	I		1		♦ Complet	tion of Interim	Operation (ex	xtended)		1	I			
KMD000150	Commencement of Operation of Facilities	0	04JUN2014		14MAY2014				-21d	l		1		•		peration of Fa	acilities	1	1	1	. !		1
KMD000170	EOT granted for May 11 to Sept 2012 (98.5 days)	99	25NOV2013	04MAR2014	25NOV2013	04MAR2014	25NOV2013		0				y 11 to Sept 20		1	!	!			1			!
KMD000175	EOT Extra granted for May 11 (2 days)	2	05MAR2014	06MAR2014	05MAR2014	06MAR2014			0	<u> </u>		-	for May 11 (2							<u> </u>	:		L
KMD000176	EOT Extra granted for Jun 11 (2.5 days)	3	07MAR2014	09MAR2014	07MAR2014	09MAR2014			0	ľ	L	-	d for Jun 11 (2.					1					
KMD000177	EOT granted for Jul 11 (0.5 days)	0	10MAR2014	09MAR2014	10MAR2014	09MAR2014			0	li .			ul 11 (0.5 days Aug 11 (0.5 day		i	i		i	i	i			i
KMD000178 KMD000179	EOT granted for Aug 11 (0.5 days) EOT granted for Sep 11 (0.5 days)	0	10MAR2014 11MAR2014	10MAR2014 10MAR2014	10MAR2014 11MAR2014	10MAR2014 10MAR2014			0	i			Sep 11 (0.5 da)		i	i	i	i	i	i	i		i
KMD000179	EOT granted for Oct 11 (3 days)	3	11MAR2014	13MAR2014	11MAR2014	13MAR 2014			0	ĺ			Oct 11 (3 days		İ	İ	İ	Ī	İ	İ	i i		İ
KMD000181	EOT granted for Nov 11 (1 days)	1	14MAR2014	14MAR2014	14MAR2014	14MAR 2014			0	T			r Nov 11 (1 day		Γ	$\Gamma - \Gamma$	\bot $ -$	Γ	Τ	T			Γ
KMD000185	EOT granted for Oct 2012	2	15MAR2014	16MAR2014	15MAR2014	16MAR2014			0	I	■ EO	T granted for	or Oct 2012		1	1			1	1			
KMD000190	EOT granted for Holiday / Sun at Extended Period	8	17MAR2014	24MAR2014	17MAR2014	24MAR2014			0	I		-	ed for Holiday /			1	1		1	1			
KMD000192	EOT granted for Nov 2012 (7.5 days)	7	25MAR2014	31MAR2014	25MAR2014	31MAR2014			0	1	0	-	nted for Nov 20		1		1	1	1	1	. !		!
KMD000193	EOT granted for Dec 2012	4	01APR2014	04APR2014	01APR2014	04APR2014			0	<u> </u>			ranted for Dec	_			<u> </u>	<u>-</u>		<u> </u>			Ŀ
KMD000195	EOT granted Mar 2013 (4.5 days)	5	05APR2014	09APR2014	05APR2014	09APR2014			0	ľ			granted Mar 2 T granted for A					1					
KMD000196 KMD000197	EOT granted for April 2013 (3 days) EOT granted for May 2013 (4 days)	3 4	10APR2014 13APR2014	12APR2014 16APR2014	10APR2014 13APR2014	12APR2014 16APR2014			0	li .			OT granted for			i		i	i	i			i
KMD000197	EOT granted for June 2013 (4.5 days)	5	17APR2014	21APR2014	17APR2014	21APR2014			0	li .			EOT granted to	-		i	i	i	i	i	i		i
KMD000199	Additional EOT granted for April 2013 (4 days)	4	22APR2014	25APR2014	22APR2014	25APR2014	1		0	i			Additional E			days)	i	i	i	i	i i		i
KMD000200	Additional EOT granted for May 2013 (2.5 days)	3	26APR2014	28APR2014	26APR2014	28APR2014			0	T		. L	Additional B	EOT granted fo	r May 2013 (2	2.5 days)	Γ	Γ	Γ	T	$\Gamma = -1$		Γ
KMD000201	EOT granted for July 2013 (2.5 days)	3	29APR2014	01MAY2014	29APR2014	01MAY2014			0	I		1	EOT gran	nted for July 20	13 (2.5 days)	1	1		1	1			
KMD000202	EOT granted for August 2013 (7 days)	7	02MAY2014	08MAY2014	02MAY2014	08MAY2014			0	I		1		ranted for Augu			1		1	1			
KMD000203	EOT granted for September 2013 (3.5 days)	3	09MAY2014	11MAY2014	09MAY2014	11MAY2014			0	1		1	EOT	granted for Se	ptember 2013	(3.5 days)	1		<u> </u>	1			<u> </u>
	As-built Drawing for Upgrade Works Proving Testfor All E&M Works	90	15JAN2014	17APR2014	15JAN2014 A	13MAY2014	15JAN2014		26d	l		, A	As-built Drawing	g for Upgrade \	Norks 	 	 	 	 	 	 		 -
	Interim Operation of Existing Plant	1075	19DEC2010	03JUN2014	19DEC2010	13MAY2014	19DEC2010		-21d				1	Interim Op	peration of Ex	isting Plant		i	i	i			i
	Checking of Permanent Works	1								ı		1	i	1	Ī	Ī		1	i i	Ī			i
Submission and C	Consent									I		1			1	1			1	1	I I		
Submission and	_ · ·		,	,		,			1	I					1	1		1	1	1			
	Dummy: End of Design Stage	1 1	28FEB2014	28FEB2014	28FEB2014	28FEB2014			0	1	Dummy: Ei	nd of Desig	n Stage				1	1		<u> </u>			
vil and Structural \	nced Primary Treatement System									ļ.		-			1					1			-
Building and Str												1						1					ŀ
	CEPT: MCC Gravel on roof	6	03MAR2014	08MAR2014	03MAR2014	08MAR 2014			0	i .	CEPT: I	MCC Grave	el on roof	i	i	i		i	i	i			i
Septic Waste Coll	•				<u> </u>					ı		i	i	i	i	i	i	i	i	i	i i		ī
Building and Str	uctures									I		1			1	1			1	1	I I		
	Septic:FRPframe for louver	1	28FEB2014	28FEB2014	28FEB2014	28FEB2014				I		P frame for			1	1	1	1	1	1			
	Septic: Insulation board on roof	1	28FEB2014	28FEB2014	28FEB2014	28FEB2014				I		sulation boar	1	1	1	1	1	1	1	1			
	Septic: Cements and screeding on roof	2	28FEB2014	28FEB2014	28FEB2014	28FEB2014				1	Septic: Cer	ment sand s	screeding on ro	oot					<u></u>				<u></u>
Auxiliary Building										ļ.		-			1	!				1	. !		!
Building and Str CCC970140	Gate House: Superstructure	30	22FEB2014 A	28MAR 2014	22FEB2014 A	03MAR2014	22FEB2014		-22d	l' .		Gate Hou	se: Superstruc	ture	1	-	-	1		1			ŀ
CCC970150	Gate House: Remove Temp Support	18	29MAR 2014	23APR2014	04MAR2014	24MAR 2014	221 LD2014		-22d	l -		Caterroa		Remove Temp	Support			1					
CCC970160	Gate House: ABWF Works	20	24APR2014	19MAY2014	15APR2014	13MAY2014			-5d	li .		i	G	ate House: AB	WF Works	i	i	i	i	i	i		i
Refurbishmentan	nd Renewal Works									Ī		1	1		1		1	1	I	1		_	
Miscellaneous										l			<u>.</u> . i.	1	I.	L	1	1	I	I	ı		
	Refurbishment of Existing Buildings / Structures	60		24APR2014	10FEB2014 A	13MAY2014	10FEB2014		14d					nt of Existing B	Buildings / Stru	uctures	1	1	I	I	1 1		
-	SHB: External ABWF	70	23JAN2014	24APR2014	23JAN2014 A	13MAY2014	23JAN2014		14d				SHB: Externa	ai ABWF			1	1					
nish date 20J ata date 28F un date 03N age number 1A roject name PR4			PPST\	N Progran	nme R7B-	Progress	up to 28 Fe	eb 2014 - 3	Month	s Rolli	ng Pro	gramn	me							Pr Cr Su St	irly bar ogress ba itical bar immary ba art milesto nish milest	ar one poin	

Activity ID	Description	Origina Ouration	Early Start	Early Finish	Late Start	Late Finish	Actual Start	Actual Finish	Total Float	2014 2	2015
		Julation						Fillisii		FEB MAR APR MAY JUN JUL AUG SEP OCT NOV DEC JAN	FEB
	3 SHB: Bonnite finishes to external wall	24	24FEB2014 A		24FEB2014 A	26APR2014	24FEB2014		26d	- 	
CM001230B	SHB: Remove working platform to external wall	12	24MAR2014	07APR2014	28APR2014	13MAY2014			26d	d SHB: Remove working platform to external wall	
nal Works											
cellaneous	Works										
VM101090	Flowmeter: Const. Weir 1 at Extg Outfall Manhole	6	18APR2014	25APR2014	18APR2014	25APR2014			0	□ Flowmeter: Const. Weir 1 at Extg Outfall Manhole □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □	
VM101105	Flowmeter: Closeup, concrete support & wall 2	4	07APR2014	10APR2014	21MAR2014	26MAR2014	ì	i	-11d	d I 🛮 Flowmeter: Closeup, concrete support & wall 2	
WM101106	Flowmeter: Observation for Change Over 2	3	15APR2014	17APR2014	27MAR2014	31MAR2014		1	-11d	d I Flowmeter: Observation for Change Over 2	
WM101110	Flowmeter: Const. Weir 2 at Extg Outfall Manhole	6	18APR2014	25APR2014	18APR2014	25APR2014	ì	İ	0	o 🗖 Flowmeter: Const. Weir 2 at Extg Outfall Manhole	
WM101120	Flowmeter: Backfill	12	18APR2014	06MAY2014	18APR2014	06MAY2014	i	İ	0	0 Flowmeter: Backfill	
VM101500		60	23JAN2014	10APR2014	23JAN2014 A	10APR2014	23JAN2014		0	Boundary Wall: Provision of New U-channel	_
VM101675	Construction of Access M010	30	15FEB2014 A	21MAR2014	15FEB2014 A	12MAR2014	15FEB2014		-8d	d Construction of Access M010	
VM101680		15	05MAR2014	21MAR2014	24FEB2014	12MAR2014	1	†	-8d		
VM101683	Construction of Access M006 0+00 to 0+50	30	22MAR2014	30APR2014	13MAR 2014	17APR2014	1	-	-8d	¥'	
WM101685	Formation of Access M000 0+50 to 0+110	15	11APR2014	02MAY2014	01APR2014	22APR2014	1	<u> </u>	-8d	<u> </u>	
		15			23APR2014	12MAY2014			-8d	<u> </u>	-
WM101688	Construction of Access M006 0+50 to 0+110		03MAY2014	21MAY2014			<u> </u>	<u> </u>	_	¥'	
WM101689	Construction of Access M001	30	22MAR2014	30APR2014	20MAR2014	28APR2014		ļ	-2d	Construction of Access M009	
VM101690		50	25JAN2014	31MAR2014	25JAN2014 A	31MAR2014	25JAN2014		0	<u> </u>	
VM101695	Access around new PTW	80	30DEC2013	07MAY2014	30DEC2013	13MAY2014	30DEC2013		5d	⇒	
VM101800		380	02JUN2012	03JUN2014	02JUN2012	23APR2014	02JUN2012		-32d		
VM102300	0 0	30	22FEB2014 A		22FEB2014 A	28MAR2014	22FEB2014		0	Demolition of Existing Admin Building	
WM103210	·	75	27JAN2014	17APR2014	27JAN2014 A	13MAY2014	27JAN2014		26d		
WM215070E	Access M002: Storm Drain bet S19 to CP19	24	10FEB2014 A	05MAR2014	10FEB2014 A	05MAR2014	10FEB2014		0	0 Access M002: Storm Drain bet S19 to CP19	
WM215080E	Access M002: Storm Drain bet CP19 to CP19A	24	25FEB2014 A	20MAR2014	25FEB2014 A	05MAR2014	25FEB2014		-15d	d Ccess M002: Storm Drain bet CP19 to CP19A	
NM215110E	Stockpile Area: Storm Drain bet S19 /CP20 to S20	51	23JAN2014	28FEB2014	23JAN2014 A	28FEB2014	23JAN2014		0	Stockpile Area: Storm Drain bet S19 /CP20 to S20	
VM215120E	Stockpile Area: Storm Drain bet S20 to S21	30	16FEB2014 A	17MAR 2014	16FEB2014 A	17MAR2014	16FEB2014	i	0	O Stockpile Area: Storm Drain bet S20 to S21	_
NM215620E	Access M006: Storm Drain bet CP12A to CP12	16	14FEB2014 A	01MAR2014	14FEB2014 A	01MAR2014	14FEB2014	i	0	O Access M006: Storm Drain bet CP12A to CP12	
WM216020E		24	14FEB2014 A	09MAR2014	14FEB2014 A	09MAR2014	14FEB2014		0	O Access M004: Storm Drain bet R2 to R1	
WM216030E		28	03MAR2014	30MAR2014	03MAR2014	30MAR2014	1	†	0	Access M004: Storm Drain bet R1 to S3	
WM216120E	Access M003: Storm Drain bet S2A to CP2A/CP2B	25	14FEB2014 A	10MAR 2014	14FEB2014 A	10MAR2014	14FEB2014		0	Access M003: Storm Drain bet S2A to CP2A / CP2B	
WM216130E	Access M003: Storm Drain bet S2A to CP2E/CP2D	25	26FEB2014 A	22MAR 2014	26FEB2014 A	22MAR2014	26FEB2014	 	- 0	Access M003: Storm Drain bet S2A to CP2E / CP2D	-
WM217000E		125		13APR2014	120CT2013	13MAY2014			204	<u> </u>	
WM225205E	U channel LV Cable Ducts East of Extor PTW after demolish	30	12OCT2013 09MAR2014	07APR2014	09MAR2014	07APR2014	12OCT2013	 	30d	O Claimine LV Cable Ducts East of Extg PTW after demolish	
WM229020	BW: ChC0+00 to ChC0+122.4 Type B	30	21FEB2014	07AFR2014 A 27MAR2014	21FEB2014 A	13MAY2014	21FEB2014		47d		
	71	7			<u> </u>		<u> </u>				
WM229200	BW: Main Gate at ChC0 / ChB0 Type B		27FEB2014 A	27MAR2014	27FEB2014 A	13MAY2014	27FEB2014		47d	<u>" </u>	-
WM229450	BW: ChD0+200 to ChD0+407.89 Type B	30	27FEB2014 A	27MAR2014	27FEB2014 A	13MAY2014	27FEB2014	ļ	47d	<u> </u>	
XT995340	Construction of Car Park	28	29MAR2014	07MAY2014	29MAR 2014	07MAY2014	<u> </u>		0	O Construction of Car Park	
XT995425	Weighbridge at Egress	40	19FEB2014 A	07APR2014	19FEB2014 A	07APR2014	19FEB2014		0	0 Weighbridge at Egress	
XT995430	Remaining Roadwork at Access M001 and M003	18	23APR2014	15MAY2014	17APR2014	13MAY2014			-2d	d Remaining Roadwork at Access M001 and M003	
y Works										<u> </u>	
Services - FS	SD									4	
lding and Str	ructures										
SF200420	FS: Inspection and re-inspection (1)	25	10MAR2014	08APR2014	10MAR2014	08APR2014			0	FS: Inspection and re-inspection (1)	
F200430	FS: Approval Certificate (1)	25	25APR2014	26MAY2014	09APR2014	13MAY2014			-11d	d FS: Approval Certificate (1)	
F200510	FS: Submit Form FS314 & FS501 (2)	1	28MAR 2014	28MAR 2014	08MAR2014	08MAR2014	İ		-17d	d FS: Submit Form FS314 & FS501 (2)	
F200520	FS: Inspection and re-inspection (2)	25	29MAR2014	02MAY2014	10MAR2014	08APR2014	I		-17d		
F200530	FS: Approval Certificate (2)	25	03MAY2014		09APR2014	13MAY2014	İ	İ	-17d		
oing - WSD	• • • • • • • • • • • • • • • • • • •			•						 	
Iding and Str	ructures										
P200520	Watermain (PW1,CW1,GW1,LW): WSD Insp. & Re-insp.	25	21OCT2013	25MAR 2014	21OCT2013	25MAR2014	21OCT2013	ı	0	Watermain (PW1,CW1,GW1,LW): WSD Insp. & Re-insp.	
P200530	Watermain(PW1,CW1,GW1,LW): WW046 Part5	15	20JAN2014	08MAR2014	20JAN2014 A	08MAR2014	20JAN2014	 	1 ^	Watermain(PW1,GW1,LW): WW046 Part 5	
P200530 P200550	Watermain (PW1,CW1,GW1,LW): WW046 Parts Watermain (PW2,CW2,GW2): WSD Insp & Re-insp.	25	06MAR2014	03APR2014	06MAR2014 A	03APR2014	ZUJANZU14	-	1 0	Watermain (PW2,CW2,GW2): WSD Insp & Re-insp.	
							 	-	1 0	Watermain (PW2,CW2,GW2): WW046 Part 5	
P200560	Watermain(PW2,CW2,GW2): WW046 Part5	15	04APR2014	25APR2014	04APR2014	25APR2014	1	ļ	0	<u> </u>	
P201530	Watermain (FS1): WW046 Part5	24	20JAN2014	08MAR2014	20JAN2014 A	17FEB2014	20JAN2014		-17d	-	
P202510	Watermain (FS2): Submit WW046 Part 4	1	10MAR2014	10MAR2014	18FEB2014	18FEB2014	!	<u> </u>	-17d		
SP202520	Watermain(FS2): WSD Inspection and Re-inspection	25	11MAR2014	09APR2014	19FEB2014	19MAR2014	<u> </u>		-17d		
SP202530	Watermain (FS2): WW046 Part5	24	17MAR2014		25FEB2014	24MAR2014	<u> </u>	<u> </u>	-17d		
SP203510	Watermain (FW &IW): Submit WW046 Part 4	1 1	110MAR 2014	10MAR2014	10MAR2014	10MAR 2014	1	1	I 0	Matermain (FW &IW): Submit WW046 Part 4	

28FEB2014 03MAR2014 2A

c Primavera Systems, Inc

PPSTW Programme R7B- Progress up to 28 Feb 2014 - 3 Months Rolling Programme



Activity ID	Description	Original Ouration	Early Start	Early Finish	Late Start	Late Finish	Actual Start	Actual Finish	Total				0011							2045	
עו ן		Duration	Start	Finish	Start	Finish	Start	Finish	Float	FEB	MAR APR	MAY JUN	2014 JUL	AUG	SEP	OCT	NOV	DEC	JAN	2015 FEB	MAR
SSP203520	Watermain (FW&IW): WSD Inspection and Re-insp'	25	11MAR2014	09APR2014	11MAR2014	09APR2014		İ	() i		(FW&IW): WSD In:								1	
SSP203530	Watermain (FW&OW): WW046 Part5	24	10APR2014	13MAY2014	10APR2014	13MAY2014		i				Watermain (FW	/&OW): WW046	Part 5	Γ					T	100
&M Works							<u> </u>			I		1	1		1					1	1
Procurementano	Installation									ı	1 1	1	1	1	I .	1	1	I	I	l .	1
Building and St										ı	1 1	1	1	1	1	1	1	1	1	1	1
EMW163000		55	15NOV2013	19MAR 2014	15NOV2013	19MAR2014	15NOV2013	ı	1 (Access Control Sys	em Installation	1	1	1	1	1	I	1	1	1
EMW164000		55	15NOV2013	04MAR2014	15NOV2013	04MAR2014	15NOV2013	i			ALPR System Installation	1	1	1	1			I	1	1	1
EMW165030	Access systeminstallation	14	28FEB2014	15MAR 2014	28FEB2014	15MAR2014	1	t			Access system install	ition	1	1	1			I	1	1	1
EMW165130	Access systeminstallation	14	28FEB2014	15MAR 2014	28FEB2014	15MAR2014		1		1	Access system instal	ation	1	1	1	1	1	I	1	1	1
EMW181450		80	09MAR 2013	28FEB2014	09MAR 2013	28FEB2014	09MAR2013		† 		PTW: MVAC Installation AB	1	1	1	1	1	1	1	1	1	1
EMW728650	DOU B: P&D Installation MCC	15	23AUG2013	28FEB2014	23AUG2013	28FEB2014	23AUG2013		t		DOU B: P&D Installation M	c									100
EMW802215	All Area: SCADA SI Assembly PLC LCPs*	60	28FEB2014	28FEB2014	28FEB2014	28FEB2014	20/10/02/010	1			All Area: SCADA SI Assem	lv PLC LCPs*	i i	i	i	i	i	ı		i	i
	Flowmeter: E&M Installation (Ref.)	48	15NOV2013	14MAY2014	15NOV2013	29APR2014	15NOV2013	t	-110		Variation Condition	,	M Installation (F	Ref.)	i	i	i	i	i	i	i
EMW821130	Flowmeter: Flowmeter Installation (Ref.)	81	23JAN2014	09MAY2014	23JAN2014 A	29APR2014	23JAN2014	1	-70			Flowmeter: Flow	neter Installatio	n (Ref.)	i	i	i	i	i	i	i
EMW821140		10	15MAY2014	26MAY2014	30APR2014	13MAY2014	1		-110	-		Flowmete	r: Flowmeter - V	/erification	i	i	i			i	i
EMW821205		12	25FEB2014 A		25FEB2014 A	20MAR2014	25FEB2014	1	90		Flowmeter: Install Mete	2 & Pipeline in Ch	amber		i						i
	Flowmeter: Resume OFPS to twin pipeline	0	L	17APR2014	ZOI EBZOTYA	31MAR2014	ZOI EBZO14	1	-170	4	Flowr	eter: Resume OFF	S to twin pipeli	nel	i					i	i
	Starting of Rainning Season 2014 (End March)	0		17APR2014	<u> </u>	31MAR2014		1	-170	-	T .	g of Rainning Sea									i
EMW941730	Elect Bldg 1: Removal of existing LVSBA1	20	08FEB2014 A	03MAR2014	08FEB2014 A	03MAR2014	08FEB2014	 	-170	-	Elect Bldg 1: Removal of e		Jon Zorr (End)	inaj urij							
	Elect Bldg 1: new LVSBA1 reinstate and testing	20	04MAR2014	26MAR 2014	04MAR 2014	26MAR2014	00FEB2014	!		1:	Elect Bldg 1: new	-	and tosting								
EMW941740	Elect Bldg 1: Divert LVSBA1 to PTW MCC1	7	27MAR 2014	03APR2014	27MAR 2014	03APR2014		 	1	 		Divert LVSBA1 to F								-	
EMW941750	OFPS: Delivery of Mat/I & Equipment	30	28FEB2013 A	28FEB2014	28FEB2013 A	28FEB2014	28FEB2013	<u> </u>	_		OFPS: Delivery of Mat'l & E		I W WOOT								
<u> </u>					28FEB2013 A	11MAR2014	28FEB2013	<u> </u>	 		Outdoor: Lighting near										
EMW951040	· · ·	10	28FEB2014 12MAR 2014	11MAR2014 22MAR2014	12MAR 2014	22MAR2014			'	1:	Outdoor: Lighting \		na I								
EMW951050	Outdoor: Lighting West of Skip Hse Area Outdoor: Lighting Test	10 20	24MAR2014	16APR2014	24MAR2014	16APR2014		1]		Lighting Test	ca		1						
	Gate House: E&M Installation	30	24APR2014	30MAY2014	25MAR2014	03MAY2014	1	1	-220]	· · · · · · · · · · · · · · · ·		use: E&M Insta	allation — —	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u>-</u>	<u>-</u>	
	Outdoor: Boundary Wall CCTV Installation	30	24APR2014	30MAY2014	25MAR 2014	03MAY2014	-	!	-220	_			r: Boundary Wa	7	ation						
1	Outdoor: Boundary Wall CCTV Test&Commissioning	7	31MAY2014	09JUN2014	05MAY2014	13MAY2014		<u> </u>	-220	-1	1 1 7		door: Boundary			ionina				!	
	, , , , , , , , , , , , , , , , , , ,		31WA12014	0930112014	05WA12014	13WA12014	<u> </u>	<u> </u>	-220	1		- Out	door. Doundary	wan cervic	st a commiss	i i i i i i i i i i i i i i i i i i i				-	÷
Testing and Commi	ssioning									i.	1 1										
Building and St											1 1										
<u> </u>		1 00	31DEC2013	Loosepood 4	31DEC2013	Loopenoodd	Larbeagara	<u> </u>	1		DOU B: Phase 4 Auto Test/	racass Cammissia	nina.								
	DOU B: Phase 4 Auto Test/Process Commissioning	30	31DEC2013	28FEB2014	31DEC2013	28FEB2014	31DEC2013	<u> </u>			DOO B. Filase 4 Auto Tesu	Tocess Commissio	illig								-
Building Services											! !										
Building and St					T	•		<u> </u>	1	ļ	Admin BS: Governmen	De increation	1	1	1	1	1	I	ı	1	1
EMT837100	Admin BS: Government Re-inspection	30	10FEB2014 A		10FEB2014 A		10FEB2014	ļ	490		Admin BS: Governmen				1			I	1	1	
EMT838000	Admin BS: Government Issue Certificate	14	12MAR2014	25MAR2014	30APR2014	13MAY2014	<u> </u>		490		Aumin BS: Gove	illient issue cettili	raid								
	Proving Testfor All E&M Works									ı			1	I	1	1	1	I	ı	1	
Building and St		1 20	LOZEEDOOA 4 4	OOMADOCAA	LOZEEDOO4 4 A	Lanavona	LOZEEDOO4 4			·	CEPT Phase 5 submit no	u Dischargo Licon	co inco	I	1	1	1	I	ı	1	
EMT991000	CEPT Phase 5 submit new Discharge License insp.	30	07FEB2014 A	08MAR2014	07FEB2014 A	13MAY2014	07FEB2014	<u> </u>	660		1	T	se ilisp.	I	1	I	I	I	I	I	1
EMT995000	CEPT Phase 5 Optimisation period	30	07FEB2014 A	08MAR2014	07FEB2014 A	15FEB2014	07FEB2014	ļ	-210	4'	CEPT Phase 5 Optimisa		Phase 5 Provin	 na Dorind	1	I	I	I	1	I .	1
EMT995300	CEPT Phase 5 Proving Period	90	06MAR2014	03JUN2014	13FEB2014	13MAY2014			-210			CEPI	LIIQZE 2 LUOVIL	iy renou							

Start date	14JUL2010
Finish date	20JUN2014
Data date	28FEB2014
Run date	03MAR2014
Page number	3A
Projectname	PR43

c Primavera Systems, Inc.

Page 3A of 3A

