



AUES JOB No.: TCS00715/14

TUEN MUN - CHEK LAP KOK LINK
CONTRACT NO. HY/2013/12 –
NORTHERN CONNECTION TOLL PLAZA AND
ASSOCIATED WORKS

20TH MONTHLY ENVIRONMENTAL MONITORING AND
AUDIT (EM&A) REPORT – JUNE 2016

PREPARED FOR
CRBC AND KADEN JOINT VENTURE

Date	Reference No.	Prepared By	Certified By
14 July 2016	TCS00715/14/600/R0210v2	 Ben Tam (Environmental Consultant)	 T.W. Tam (Environmental Team Leader)

Ref.: HYDZHMBEEM00_0_4364L.16

15 July 2016

AECOM
Supervising Officer Representative's Office
No. 8 Mong Fat Street, Tuen Mun,
New Territories, Hong Kong

By Fax (2293 6300) and By Post

Attention: Mr. Roger Man

Dear Roger,

**Re: Agreement No. CE 48/2011 (EP)
Environmental Project Office for the
HZMB Hong Kong Link Road, HZMB Hong Kong Boundary Crossing
Facilities, and Tuen Mun-Chek Lap Kok Link – Investigation**

**Contract No. HY/2013/12 TM-CLKL Northern Connection Toll Plaza and
Associated Works
20th Monthly EM&A Report for June 2016 (EP-354/2009/D)**

Reference is made to the Monthly Environmental Monitoring and Audit (EM&A) Report (June 2016) (AUES reference: TCS00715/14/600/R0210v2 dated 14 July 2016) certified by the ET Leader and provided to us via e-mail on 14 July 2016.

Please be informed that we have no adverse comments on the captioned monthly EM&A report. We write to verify the captioned submission in accordance with Condition 4.4 of EP-354/2009/D.

Thank you for your attention. Please do not hesitate to contact the undersigned or the ENPO Leader Mr. Y. H. Hui should you have any queries.

Yours sincerely,



F. C. Tsang
Independent Environmental Checker
Tuen Mun – Chek Lap Kok Link

c.c. HyD – Mr. Stephen Chan (By Fax: 3188 6614)
HyD – Mr. Vico Cheung (By Fax: 3188 6614)
AECOM – Mr. Conrad Ng (By Fax: 3922 9797)
AUES – Mr. T. W. Tam (By Fax: 2959 6079)
CRBC – Kaden JV – Mr. John Wong (By Fax: 2253 8399)

Internal: DY, YH, ENPO Site

Q:\Projects\HYDZHMBEEM00\02_Proj_Mgt\02_Corr\HYDZHMBEEM00_0_4364L.16.docx

EXECUTIVE SUMMARY

ES01 This is the 20th Monthly EM&A Report presenting the monitoring results and inspection findings for the period from **1 to 30 June 2016** (hereinafter ‘the Reporting Period’).

SUMMARY OF EM&A ACTIVITIES FOR THE REPORTING PERIOD

ES02 The EM&A activities conducted in the Reporting Period are summary in below:-

- 24-hours TSP of Air Quality Monitoring –**50 events**
- 1-hour TSP of Air Quality Monitoring – **150 events**
- Cultural Heritage Inspection – **4 events**
- Landfill Gas Monitoring – **25 days**
- Landscape & Visual Monitoring – **4 events**
- Environmental Site Inspection – **4 events**

BREACH OF ACTION AND LIMIT (A/L) LEVELS

ES03 In the Reporting Period, no exceedances of 1-hour and 24-hour TSP were recorded according to the measurement results by the ET of Contract HY/2012/08. The summary of breach of air quality performance is shown below.

Environmental Aspect	Monitoring Parameters	Action Level	Limit Level	Event & Action		
				NOE Issued	Investigation	Corrective Actions
Air Quality	1-hour TSP	0	0	0	0	0
	24-hour TSP	0	0	0	0	0

ES04 No noise complaints were received in the Reporting Period.

ES05 Landfill gas monitoring was conducted at the construction of Retaining Wall B and Retaining Wall F by the Safety Officer. The monitoring results shown no exceedances were triggered.

ES06 Site inspection for landscape and visual was conducted on weekly basis by the Landscape Architect to ensure the compliance with the intended aims of the mitigation measures. Most of the landscape works such as planting was not yet commenced.

SITE INSPECTION

ES07 In the Reporting Period, joint site inspection by the RE, ET and the Contractor was carried out on **8th, 15th, 21st and 28th June 2016** and the IEC has attended the joint site inspection on **8th and 28th June 2016**. No non-compliance was recorded during the site inspection but 3 observations and 3 reminders were recorded.

ES08 Inspection for Pitcher Plants of ecology and grave of culture heritage were also carried out during the weekly site inspection. It was observed that the transplanted pitcher plants were properly protected and the growth was normally in fair condition except three individuals which appeared poor condition in the previous month were certified dead by the specialist. It is considered that the Pitcher Plant were establishing after transplanting shock and adapting to the condition of the Final Receptor Site and frequent watering is recommended.

ENVIRONMENTAL COMPLAINT

ES09 In the Reporting Period, one (1) environmental complaint was received from EPD on 7 June 2016 regarding to white color effluent discharging outfall of No.33 at Ho Yeung Street, Tuen Mun. Investigation report for the complaint has been conducted by the ET and agreed by IEC.

The statistical summary of environmental complaints is summarized in the following table.

Reporting Period	Environmental Complaint Statistics	
	Frequency	Cumulative
Since the Contract commencement	5	5
June 2016	1	6

NOTIFICATION OF SUMMONS AND SUCCESSFUL PROSECUTIONS

ES10 No environmental summons or successful prosecutions were recorded in the Reporting Period.

REPORTING CHANGE

ES11 No reporting changes were made in the Reporting Period.

FUTURE KEY ISSUES

ES12 During wet season, muddy water or other water pollutants from site surface runoff into the public areas will be key environment issue. Special attention should be paid on the water quality mitigation measures to prevent surface runoff flow to public area.

ES13 Although in wet season, air quality mitigation measures such as watering of site area for 12 times per day and covering of exposed slopes should be fully implemented to reduce construction dust impact as recommended in the EMIS.

ES14 It was reminded that good housekeeping practice should be maintained. Mosquito control measures should be properly implemented to prevent mosquito breeding on site especially after rain.

TABLE OF CONTENTS

1	INTRODUCTION	1
1.1	CONTRACT BACKGROUND	1
1.2	REPORT STRUCTURE	1
2	CONTRACT ORGANIZATION AND CONSTRUCTION PROGRESS AND ENVIRONMENTAL SUBMISSIONS	2
2.1	CONTRACT ORGANIZATION	2
2.2	CONSTRUCTION PROGRESS	2
2.3	SUMMARY OF ENVIRONMENTAL SUBMISSIONS	2
3	SUMMARY OF IMPACT MONITORING REQUIREMENTS UNDER THE CONTRACT	3
3.1	GENERAL	3
3.2	AIR QUALITY MONITORING	3
3.3	MONITORING LOCATION	3
3.4	MONITORING FREQUENCY	3
3.5	MONITORING EQUIPMENT	4
3.6	DERIVATION OF ACTION/LIMIT (A/L) LEVELS	5
3.7	OTHER ENVIRONMENTAL ASPECTS	5
3.8	MONITORING SCHEDULE	6
4	AIR QUALITY MONITORING	7
4.1	GENERAL	7
4.2	AIR QUALITY MONITORING RESULTS IN REPORTING PERIOD	7
4.3	ACTION AND LIMIT (A/L) LEVELS EXCEEDANCE	7
4.4	AIR QUALITY EXCEEDANCE INVESTIGATION	7
5	ECOLOGY MONITORING	8
5.1	GENERAL	8
5.2	PITCHER PLANTS INSPECTION	8
6	CULTURAL HERITAGE	9
6.1	GENERAL	9
6.2	GRAVE INSPECTION	9
7	LANDSCAPE AND VISUAL	10
7.1	GENERAL	10
7.2	LANDSCAPE AND VISUAL INSPECTION	10
8	LANDFILL GAS HAZARD MONITORING	11
8.1	GENERAL	11
8.2	LANDFILL GAS MONITORING RESULT	11
9	WASTE MANAGEMENT	13
9.1	GENERAL WASTE MANAGEMENT	13
9.2	RECORDS OF WASTE QUANTITIES	13
10	INSPECTION AND AUDIT	14
10.1	SITE INSPECTION	14
11	ENVIRONMENTAL COMPLAINT AND NON-COMPLIANCE	16
11.1	ENVIRONMENTAL COMPLAINT, SUMMONS AND PROSECUTION	16
12	IMPLEMENTATION STATUS OF MITIGATION MEASURES	18
12.1	GENERAL REQUIREMENTS	18
12.2	TENTATIVE CONSTRUCTION ACTIVITIES IN THE COMING MONTH	18
12.3	KEY ENVIRONMENTAL ISSUES FOR THE COMING MONTH	19
13	CONCLUSIONS AND RECOMMENDATIONS	20
13.1	CONCLUSIONS	20
13.2	RECOMMENDATIONS	20

LIST OF TABLES

TABLE 2-1	STATUS OF ENVIRONMENTAL LICENSES AND PERMITS OF THE CONTRACT
TABLE 3-1	AIR QUALITY MONITORING STATIONS UNDER THE CONTRACT
TABLE 3-2	ENHANCED TSP MONITORING PLAN – CONSTRUCTION PHASE
TABLE 3-3	ACTION AND LIMIT LEVELS FOR IMPACT AIR QUALITY MONITORING
TABLE 4-1	SUMMARY OF AIR QUALITY MONITORING EXCEEDANCE
TABLE 8-1	SUMMARY OF LANDFILL GAS MEASUREMENT RESULTS
TABLE 9-1	SUMMARY OF QUANTITIES OF INERT C&D MATERIALS
TABLE 9-2	SUMMARY OF QUANTITIES OF C&D WASTES
TABLE 10-1	SITE OBSERVATIONS FOR THE CONTRACT
TABLE 10-2	OUTSTANDING ITEMS IN SITE INSPECTION OF PREVIOUS REPORTING PERIOD
TABLE 11-1	STATISTICAL SUMMARY OF ENVIRONMENTAL EXCEEDANCE
TABLE 11-2	STATISTICAL SUMMARY OF ENVIRONMENTAL COMPLAINTS
TABLE 11-3	STATISTICAL SUMMARY OF ENVIRONMENTAL SUMMONS
TABLE 11-4	STATISTICAL SUMMARY OF ENVIRONMENTAL PROSECUTION
TABLE 12-1	ENVIRONMENTAL MITIGATION MEASURES

LIST OF APPENDICES

APPENDIX A	PROJECT LAYOUT PLAN
APPENDIX B	LAYOUT PLAN OF THE CONTRACT
APPENDIX C	ORGANIZATION OF THE CONTRACT
APPENDIX D	THREE MONTHS ROLLING PROGRAMME
APPENDIX E	MONITORING LOCATIONS FOR THE CONTRACT
APPENDIX F	EVENT AND ACTION PLAN
APPENDIX G	MONITORING SCHEDULE
APPENDIX H	CALIBRATION CERTIFICATES OF MONITORING EQUIPMENT
APPENDIX I	LANDFILL GAS MONITORING RESULTS AND GRAPHICAL PLOTS
APPENDIX J	INVESTIGATION REPORT FOR EXCEEDANCE
APPENDIX K	CHECKLIST FOR LANDSCAPE AND VISUAL MONITORING
APPENDIX L	MONTHLY SUMMARY WASTE FLOW TABLE
APPENDIX M	ENVIRONMENTAL MITIGATION AND ENHANCEMENT MEASURES IMPLEMENTATION SCHEDULE (EMIS)
APPENDIX N	CUMULATIVE STATISTICS ON EXCEEDANCE AND COMPLAINT
APPENDIX O	INVESTIGATION REPORT FOR THE COMPLAINT
APPENDIX P	INSPECTION CHECKLIST FOR VULNERABLE TO CONTAMINATED WATER DISCHARGE

1 INTRODUCTION

1.1 CONTRACT BACKGROUND

1.1.1 CRBC-Kaden Joint Venture (hereafter “CRBC-Kaden JV”) is commissioned by the Highways Department (HyD) as the Main Contractor of the Contract No. HY/2013/12 – Northern Connection Toll Plaza and Tunnel Section ((hereafter “the Contract”) and this Contract is part of the Tuen Mun – Chek Lap Kok Link (TM-CLK Link Project). TM-CLK Link Project is a Designated Project under Environmental Permit number EP-354/2009/D issued on 13 March 2015. The layout Plan of the Project and the Contract are showed in *Appendix A* and *B* respectively.

1.1.2 The construction works of the Contract mainly include:-

- a. construction of an approximately 5.4 hectares toll plaza and an associated footbridge;
- b. construction of associated carriageways including approximately 0.74 kilometre land viaducts, and an approximately 230 metres vehicular underpass to connect the toll plaza and the roundabout at Lung Mun Road/Lung Fu Road;
- c. site formation for the construction of the toll plaza, including associated slope works and natural terrain hazard mitigation measures;
- d. modification and realignment of the existing Lung Mun Road and Lung Fu Road; and
- e. associated waterworks, drainage, sewerage and landscaping works, etc..

1.1.3 This is 20th monthly EM&A report presenting the monitoring results and inspection findings for period from 1 to 30 June 2016.

1.2 REPORT STRUCTURE

1.2.1 The Monthly Environmental Monitoring and Audit (EM&A) Report is structured into the following sections:-

Section 1 Introduction

Section 2 Contract Organization and Construction Progress and Environmental Submissions

Section 3 Summary of Impact Monitoring Requirements under the Contract

Section 4 Air Quality Monitoring

Section 5 Ecology Monitoring

Section 6 Cultural Heritage

Section 7 Landscape and Visual

Section 8 Landfill gas hazard Monitoring

Section 9 Waste Management

Section 10 Inspections and Audit

Section 11 Environmental Complaints and Non-Compliance

Section 12 Implementation Status of Mitigation Measures

Section 13 Conclusions and Recommendations

2 CONTRACT ORGANIZATION AND CONSTRUCTION PROGRESS AND ENVIRONMENTAL SUBMISSIONS**2.1 CONTRACT ORGANIZATION**

2.1.1 The Contract organization and contact details of key personnel are shown in *Appendix C*.

2.2 CONSTRUCTION PROGRESS

2.2.1 In the Reporting Period, the major construction activity conducted under the Contract is summarized in below. The three-months rolling programme of the Contract is enclosed in *Appendix D*.

- Instrumentation and Monitoring
- Site Formation – Earthwork on Slope D and E; surface drainage on slope C, D & E and Portion H;
- Toll Plaza Decking TD1 (Portal Beam Construction) and TD2;
- Toll Plaza Footbridge;
- Retaining Structure RW_A, RW_B and RW_F;
- Toll Collector Subway & Associated Works;
- Bridge G1, G2 and Bridge H1;
- Sewer Culvert at FC1 and FC2;
- Waterproofing and lining at Vehicular Underpass;
- Road and Drainage Works at +11mPD, +19mPD and Portion H.

2.3 SUMMARY OF ENVIRONMENTAL SUBMISSIONS

2.3.1 The environmental submissions under the EP requirement had been submitted to the EPD and they are listed in below:

- Monitoring Plan on Construction Dust (submission refer to Contract HY/2012/08)
- Landscape and Visual Plan (not yet endorsed by EPD)
- Waste Management Plan (endorsed by EPD on 16 March 2015)
- Baseline Monitoring Report (not yet endorsed by EPD)

2.3.2 Summary of environmental permits, licenses and notifications for the Contract is presented in *Table 2-1*.

Table 2-1 Status of Environmental Licenses and Permits of the Contract

No.	Type of Permit/ License	Submission Date	Reference/ License No.	Date of Issue	Date of Expiry
1	Air pollution Control (Construction Dust) Regulation	06-08-2014	377719	06-08-2014	N/A
2	Chemical Waste Producer Registration - Waste Producers Number	06-08-2014	5117422C389301	03-09-2014	N/A
3	Water Pollution Control Ordinance -Variation of Effluent Discharge License	22-08-15	WT00023973-2016	14-03-16	30-09-2019
4	Waste Disposal Regulation - Billing Account for Disposal of Construction Waste	21-07-2014	7020460	01-08-2014	N/A
5	CNP for Multiple Task	21-04-2016	GW-RW0520-16	05-05-2016	04-11-2016
6	CNP for MH5	25-04-2016	GW-RW0563-16	18-05-2016	17-11-2016
7	CNP for Tunnel works	25-04-2016	GW-RW0582-16	23-05-2016	22-11-2016
8	Extend CNP for Flasework Erection	07-04-2016	GW-RW0215-16	26-04-2016	21-06-2016
9	Extend CNP for Flasework Erection	18-05-2016	GW-RW0289-16	22-06-2016	19-08-2016

3 SUMMARY OF IMPACT MONITORING REQUIREMENTS UNDER THE CONTRACT

3.1 GENERAL

3.1.1 The major construction activities under the Contract are land-based and no marine work will be involved. In accordance with the Project EM&A Manual requirements, the environmental aspects under the Contract shall be included air quality, ecological, cultural heritage, landscape and visual, landfill gas and site inspection during construction period. In addition, audit of the contractor's implementation of the construction noise and land-based water quality pollution control measures are also required for the Contract.

3.1.2 A summary of construction phase EM&A requirements are presented in the sub-sections below.

3.2 AIR QUALITY MONITORING

3.2.1 The construction phase air quality monitoring shall cover the following parameters:

- 1-hour TSP; and
- 24-hour TSP

3.3 MONITORING LOCATION

3.3.1 The air quality monitoring stations for impact monitoring are listed in *Table 3-1* and illustrated in *Appendix E*.

Table 3-1 Air Quality Monitoring Stations under the Contract

ID	Location	Air monitoring station Description
ASR1	Tuen Mun Fireboat Station	EM&A Manual
ASR5	Pillar Point Fire Station	EM&A Manual
AQMS1	Previous River Trade Golf	Enhanced TSP Level under EP condition 2.4
ASR6	Butterfly Beach Laundry	Enhanced TSP Level under EP condition 2.4
ASR10	Butterfly Beach Park	Enhanced TSP Level under EP condition 2.4

3.4 MONITORING FREQUENCY

3.4.1 As per Condition 2.4 of the EP of TM-CLKL, an enhanced monitoring plan on TSP level at Tuen Mun ("the Enhanced TSP Monitoring Plan") is required to be submitted to the DEP for approval at least 1 month before the commencement of construction of the Project. Details of the Enhanced TSP Monitoring Plan under Contract No. HY/2012/08 could be found from the project website. The air quality monitoring work under this Contract will follow the monitoring requirement of enhanced TSP monitoring under the project.

3.4.2 The air quality monitoring requirements for the Contract is summarized in *Table 3-2*.

Table 3-2 Enhanced TSP Monitoring Plan – Construction Phase

Condition	Monitoring Parameter	Monitoring Location	Frequency	Monitoring Requirement
General	1-hour TSP	ASR1, ASR5, AQMS1, ASR6, ASR10	3 times per day every six days	Throughout the Northern Connection, toll plaza and tunnel buildings construction works
	24-hour TSP	ASR1, ASR5, AQMS1, ASR6, ASR10	Daily every six days	
Special	1-hour TSP	ASR1, ASR5, AQMS1, ASR6, ASR10	3 times per day every three days	<u>Northern Connection</u> During excavation works for launching shaft, excavation work for Cut and Cover Tunnel and Cut and Cover Tunnel Construction
	24-hour TSP	ASR1, ASR5, AQMS1, ASR6, ASR10	Daily every three days	

Condition	Monitoring Parameter	Monitoring Location	Frequency	Monitoring Requirement
				<p><u>Toll Plaza</u> During excavation, slope works, construction of road and superstructures and wind erosion from open sites and stockpiling areas</p> <p><u>Tunnel Buildings</u> During excavation, foundation works, construction of superstructures and wind erosion from open sites and stockpiling areas</p>

3.5 MONITORING EQUIPMENT

- 3.5.1 The 24-hour and 1-hour TSP levels shall be measured by following the standard high volume sampling method as set out in the *Title 40 of the Code of Federal Regulations, Chapter 1 (Part 50), Appendix B*.
- 3.5.2 A high volume sampler in compliance with the following specifications shall be used for carrying out the 1-hr and 24-hr TSP monitoring:
- (i) 0.6-1.7 m³/min (20-60 SCFM) adjustable flow range;
 - (ii) equipped with a timing/control device with +/- 5 minutes accuracy for 24 hours operation;
 - (iii) installed with elapsed-time meter with +/- 2 minutes accuracy for 24 hours operation;
 - (iv) capable of providing a minimum exposed area of 406 cm² (63 in²);
 - (v) flow control accuracy: +/- 2.5% deviation over 24-hr sampling period;
 - (vi) equipped with a shelter to protect the filter and sampler;
 - (vii) incorporated with an electronic mass flow rate controller or other equivalent devices;
 - (viii) equipped with a flow recorder for continuous monitoring;
 - (ix) provided with a peaked roof inlet;
 - (x) equipped with a manometer;
 - (xi) able to hold and seal the filter paper to the sampler housing in a horizontal position;
 - (xii) easy to change the filter; and
 - (xiii) capable of operating continuously for 24-hr period.
- 3.5.3 Calibration of dust monitoring equipment shall be conducted by the ET upon installation and in bi-monthly intervals during construction phase. The transfer standard shall be traceable to the internationally recognized primary standard and be calibrated annually. The calibration data shall be properly documented for future reference by concerned parties, such as the IEC. All the data shall be converted into standard temperature and pressure condition.
- 3.5.4 The filter paper of 24-hour TSP measurement shall be determined by HOKLAS accredited laboratory.
- 3.5.5 If the ET Leader proposes to use a direct reading dust meter to measure 1-hr TSP levels on an ad hoc basis, he shall submit sufficient information to the IEC to prove that the instrument is capable of achieving a comparable result as that the High Volume Sampler (HVS) and may be used for the 1-hr sampling. The instrument should also be calibrated regularly and the 1-hr sampling shall be checked periodically by the HVS to check the validity and accuracy of the results measured by the direct reading method.
- 3.5.6 According to the Project EM&A Manual, wind data monitoring equipment shall also be provided and set up for logging wind speed and wind direction near the dust monitoring

locations. The equipment installation location shall be proposed by the ET Leader and agreed with the IEC. For installation and operation of wind data monitoring equipment, the following points shall be observed:

- (i) the wind sensors should be installed on masts at an elevated level 10 m above ground so that they are clear of obstructions or turbulence caused by the buildings;
- (ii) the wind data should be captured by a data logger to be down-loaded for processing at least once a month;
- (iii) the wind data monitoring equipment should be re-calibrated at least once every six months; and
- (iv) wind direction should be divided into 16 sectors of 22.5 degrees each.

3.6 DERIVATION OF ACTION/LIMIT (A/L) LEVELS

3.6.1 The baseline monitoring results formed the basis for determining the air quality criteria for the impact monitoring. The ET shall compare the impact monitoring results with air quality criteria set up for 24-hour TSP and 1-hour TSP. Based on results of the approved Baseline Monitoring Report of HyD Contract HY/2012/08, the Action and Limit Levels for impact dust monitoring are shown in *Tables 3-3*.

Table 3-3 Action and Limit Levels for Impact Air Quality Monitoring

Air Quality Monitoring Stations	24-hour TSP ($\mu\text{g}/\text{m}^3$)		1-hour TSP ($\mu\text{g}/\text{m}^3$)	
	Action Level	Limit Level	Action Level	Limit Level
ASR1	213	260	331	500
ASR5	238	260	340	500
AQMS1	213	260	335	500
ASR6	238	260	338	500
ASR10	214	260	337	500

3.6.2 Should non-compliance of the environmental quality criteria occurs, remedial actions will be triggered according to the Event and Action Plan which presented in *Appendix F*.

3.7 OTHER ENVIRONMENTAL ASPECTS

Noise

3.7.1 The TM-CLKL EIA study stated that no existing noise sensitive receiver (NSR) was identified within the Study Area at Tuen Mun. Therefore, no noise monitoring is required for the construction phase of the Contract.

3.7.2 Regular site inspections and audits will be carried out during the construction phase in order to confirm the construction works under the Contract comply with the regulatory noise requirements.

Water Quality

3.7.3 No marine works will be undertaken under the Contract. Therefore, no water quality monitoring is required for the construction phase of the Contract.

Ecology

3.7.4 No marine works will be undertaken under the Contract and generated marine ecological impact, no dolphin monitoring is required for the construction phase of the Contract.

3.7.5 During construction phase, the ET will perform Pitcher Plants inspection at least once every week to report the growth condition and protection measures.

Landscape and Visual

3.7.6 Measures to mitigate landscape and visual impact during construction should be checked and monitored by a Registered Landscape Architect to ensure compliance with the intended aims

of the mitigation measures in accordance with the EM&A Manual.

Cultural Heritage

- 3.7.7 Grave G1 as a heritage resource is situated near the proposed toll plaza in Tuen Mun. Site inspections should be undertaken at least once per week throughout the construction period to ensure compliance with the intended aims of recommended mitigation measures.

Landfill Gas

- 3.7.8 During EIA study, landfill gas hazards are likely to be generated from the Pillar Point Valley (PPV) Landfill. Landfill gas monitoring is recommended during construction of the Contract to ensure the works area is free of landfill gas before the worker entered the concerned area.

3.8 MONITORING SCHEDULE

- 3.8.1 The monitoring schedule for landscape & visual and landfill gas for the present and next reporting period are presented in *Appendix G*.

4 AIR QUALITY MONITORING**4.1 GENERAL**

4.1.1 The air quality impact monitoring and enhanced Total Suspended Particulates (TSP) level monitoring at five proposed locations are currently carried out by the ET of Contract HY/2012/08. Sharing of impact air quality monitoring data between HY/2012/08 and HY/2013/12 is agreed by all relevant parties. The Contract is not required to conduct its own dust monitoring exercise until the Contract HY/2012/08 ends.

4.2 AIR QUALITY MONITORING RESULTS IN REPORTING PERIOD

4.2.1 In the Reporting Period, 1-hour and 24-hour TSP monitoring at the five proposed locations are continued to perform by the ET of Contract HY/2012/08. Therefore, no air quality monitoring was conducted by the ET of Contract HY/2013/12. Details information of air quality monitoring results could be referred to the Monthly EM&A Reports of the Contract HY /2012 /08 (**June 2016**).

4.3 ACTION AND LIMIT (A/L) LEVELS EXCEEDANCE

4.3.1 According to the air quality monitoring result provided by Contract HY/2012/08, no exceedances in 1-hour and 24-hour TSP were recorded in the Reporting Period. No Notification on Exceedances (NOEs) was issued by the ET of Contract HY/2012/08. The summary of air quality exceedance in the Reporting Period is shown in **Table 4-1**.

Table 4-1 Summary of Air Quality Monitoring Exceedance

Date of Exceedance	Monitoring Station	Air Quality Parameter	Result	Exceed
NA	NA	NA	--	--

4.4 AIR QUALITY EXCEEDANCE INVESTIGATION

4.4.1 No investigation for exceedance is required for the Reporting Period.

5 ECOLOGY MONITORING

5.1 GENERAL

5.1.1 According to the EM&A Manual requirements, regularly inspection for Pitcher Plants shall be conducted at least once every week to report the protection measure of the Pitcher Plants during construction period.

5.1.2 A total of 181 pitcher plants were transplanted to final receptor site and the rest of the Pitcher Plant individuals (certified dead by the specialist) were not transplanted and were treated as general refuse. All the transplantation of pitcher plant from the nursery site to final receptor site was completed on 10th September 2015.

5.2 PITCHER PLANTS INSPECTION

5.2.1 Inspection for the growth and mitigation measures implementation status of the Pitcher Plant at the final receptor area were performed on **8th, 15th, 21st and 28th June 2016** by the ET in the Reporting Period.

5.2.2 During each inspection, the transplanted pitcher plant was performed random checking at the final receptor area. It was observed that the transplanted pitcher plants were properly protected and the growth was normally in fair condition except three individuals which appeared poor condition in the previous month were certified dead by the specialist. It is considered that the Pitcher Plant were establishing after transplanting shock and adapting to the condition of the Final Receptor Site and frequent watering is recommended. Besides, no construction activities were observed to be carried out at the surrounding of the final receptor area. The condition of chain link fence is good and no repair or maintenance is required.

6 CULTURAL HERITAGE

6.1 GENERAL

6.1.1 According to the EM&A Manual requirements, regular inspection for heritage resource, Grave G1, shall be audited by the ET at least once every week to ensure recommended mitigation measures implemented during construction period. The aim of the survey is to prevent any possible damage to the grave and to ensure the proposed mitigation measures are implemented. The broad scope of the audit will involve supervision of the following:

- Non-contact effects of the engineering works, such as vibration from pneumatic drills which could cause damage, such as foundation or wall cracks and loosening of tiles or fixtures; and
- Contact between the historic structures and equipment and materials associated with the engineering works.

6.1.2 Specifically, the monitoring programme will entail the following tasks:

- The extent of the agreed works areas should be regularly checked during the construction phase to ensure the buffer is being maintained; and
- Ensure no stockpiling or equipment storage is affecting the structure.

6.1.3 In the event of non-compliance the responsibilities of the relevant parties is detailed in the Event/ Action Plan in *Appendix F*.

6.2 GRAVE INSPECTION

6.2.1 In the Reporting Period, Grave G1 of inspection was undertaken on **8th, 15th, 21st and 28th June 2016**. During these inspections, buffer zone was maintained between the working area and the Grave. The nearby areas were clean, and no construction materials or mechanical equipment were stored within or close to the buffer zone.

6.2.2 Since construction works very close to buffer zone of the Grave G1, cultural heritage mitigation measures and protection measures as provided by the Contractor, therefore has fully implemented in accordance with EM&A Manual requirements.

7 LANDSCAPE AND VISUAL

7.1 GENERAL

7.1.1 According to EM&A Manual requirements, monitoring of Contractor's operations during construction period to report on Contractor's compliance should be carried out on weekly basis. Measure to mitigate landscape and visual impact during construction should be checked and monitored by a Registered Landscape Architect to ensure compliance with the intended aims of the mitigation measures. Moreover, the progress of the engineering works shall be regularly reviewed on site to identify the earliest practical opportunities for the landscape works to be undertaken.

7.2 LANDSCAPE AND VISUAL INSPECTION

7.2.1 In the Reporting Period, site inspection for landscape and visual mitigation measures was undertaken on 3rd, 10th, 17th and 24th June 2016 by the Registered Landscape Architect.

7.2.2 Most of the landscape works such as planting was not yet commenced. The detailed inspection checklists were provided in *Appendix K*.

8 LANDFILL GAS HAZARD MONITORING**8.1 GENERAL**

8.1.1 During EIA study, landfill gas hazards are likely to be generated from the Pillar Point Valley (PPV) Landfill. Hence, regular landfill gas monitoring is recommended during construction of the proposed toll plaza.

8.1.2 During construction, a Safety Officer should be appointed to carry out the monitoring works. The monitoring frequency and areas to be monitored should be set down prior to commencement of ground-works either by the Safety Officer or an approved and appropriated qualified person. The routine monitoring should be carried out in all excavations, manholes, chambers, relocation of monitoring wells and any other confined spaces that may have been created. All measurements in excavations should be made with the extended monitoring tube located not more than 10 mm from the exposed ground surface. Monitoring should be performed properly to make sure that the area is free of landfill gas before any man enters in the area.

8.1.3 For excavations deeper than 1m, measurements should be carried out:

- at the ground surface before excavation commences;
- immediately before any worker enters the excavation;
- at the beginning of each working day for the entire period the excavation remains open; and
- periodically through the working day whilst workers are in the excavation.

8.1.4 For excavations between 300mm and 1m deep, measurements should be carried out:

- directly after the excavation has been completed; and
- periodically whilst the excavation remains open

8.1.5 For excavations less than 300mm deep, monitoring may be omitted, at the discretion of the Safety Officer (SO) or other appropriately qualified person.

8.1.6 To ensure the accuracy of the monitoring data, zeroing of the gas analyser shall be undertaken at the start of each day's monitoring. As advised by the SO, the gas analyser would be optimally calibrated by the self-test function to provide the most accurate result. The gas analyser is calibrated and certified by a laboratory accredited under HOKLAS or any other international accreditation scheme at yearly basis.

8.2 LANDFILL GAS MONITORING RESULT

8.2.1 In the Reporting Period, landfill gas monitoring was conducted at the construction of Retaining Walls B and F. Location of both Retaining Walls is illustrated in *Appendix E*. A BIOGAS 5000 gas analyser was used for the landfill gas monitoring and the valid calibration certificate is presented in *Appendix H*.

8.2.2 There were a total of 25 days monitoring were carried by the Safety Officer or an approved and qualified persons. The results of landfill gas measurement are summarized in *Table 8-1*. Moreover, database of monitoring result and graphical plot are attached in *Appendix I*.

Table 8-1 Summary of Landfill Gas Measurement Results

Landfill Gas Parameter	Action Level	Limit Level	Detectable at Retaining Wall B		Detectable at Retaining Wall F	
			Min	Max	Min	Max
Methane	>10% LEL (>0.5% v/v)	>20% LEL (>1% v/v)	0%	0.1%	0.1%	0.1%
Oxygen	<19%	<18%	21.0%	21.1%	21.1%	21.1%
Carbon Dioxide	>0.5%	>1.5%	0.1%	0.2%	0.1%	0.2%

- 8.2.3 The measurement results shown that slightly methane concentration was detected and oxygen concentration measured was over 21.0 % and Carbon Dioxide was between 0.1 and 0.2 %. No exceedance was triggered and therefore no corrective action was required accordingly.

9 WASTE MANAGEMENT**9.1 GENERAL WASTE MANAGEMENT**

9.1.1 Waste management was carried out by an on-site Environmental Officer or an Environmental Supervisor from time to time. The effective management of waste arising during the construction phase will be monitored through the site audit programme. The aims of the waste audit are:

- to ensure the waste arising from the works are handled, stored, collected, transferred and disposed of in an environmentally acceptable manner; and
- to encourage the reuse and recycling of material.

9.1.2 In addition to the site inspections, the ET shall review the documentation procedures prepared by the Waste Coordinator once a week to ensure proper records are being maintained and procedures undertaken in accordance with the Waste Management Plan.

9.2 RECORDS OF WASTE QUANTITIES

9.2.1 All types of waste arising from the construction work are classified into the following:

- Construction & Demolition (C&D) Material;
- Chemical Waste;
- General Refuse; and
- Excavated Soil.

9.2.2 The quantities of wastes generated under the Contract in this Reporting Period are summarized in **Tables 9-1** and **9-2** and the Monthly Summary Waste Flow Table is shown in **Appendix L**. Whenever possible, materials were reused on-site as far as practicable.

Table 9-1 Summary of Quantities of Inert C&D Materials

Type of Waste	Quantity	Disposal Location
Reused in this Contract (Inert) (^000m ³)	10.647	-
Reused in other Projects (Inert) (^000m ³)	2.935	1. Lam Tei Quarry 2. Eco Park K. Wah Recycle Facilities 3. Lung Kwu Tan Tailor Recycled Aggregates 4. Liantang BCP Project 5. TM-CLKL Contract 2 - Northern Connection Sub-sea Tunnel Section Project
Disposal as Public Fill (Inert) (^000m ³)	1.377	Tuen Mum Area 38

Table 9-2 Summary of Quantities of C&D Wastes

Type of Waste	Quantity	Disposal Location
Recycled Metal (^000kg)	0	-
Recycled Paper / Cardboard Packaging (^000kg)	0	-
Recycled Plastic (^000kg)	0	-
Chemical Wastes (^000kg)	0	-
General Refuses (^000m ³)	0.097	WENT

10 INSPECTION AND AUDIT**10.1 SITE INSPECTION**

10.1.1 According to the approved EM&A Manual, the environmental site inspection shall be formulated by ET Leader on weekly basis to confirm the environmental performance of the construction site.

Findings / Deficiencies During Reporting Period

10.1.2 In the Reporting Period, joint site inspections to evaluate site environmental performance were carried out by the RE, ET and the Contractor on **8th, 15th, 21st and 28th June 2016**. No non-compliance was noted but **3** observations and **3** reminders were recorded during site inspection. Moreover, ENPO/IEC has attended joint site inspection on **8th and 28th June 2016**.

10.1.3 The findings / deficiencies observed during the weekly site inspection in the Reporting Period are listed in **Table 10-1**.

Table 10-1 Site Observations for the Contract

Date	Findings / Deficiencies	Follow-Up Status
8 June 2016	<ul style="list-style-type: none"> Stagnant water cumulated on site after the rainstorm should be clear or mitigation measure should be provided to prevent mosquito breeding. 	<ul style="list-style-type: none"> Not required for reminder.
15 June 2016	<ul style="list-style-type: none"> C&D waste cumulated on site was observed. The contractor should clean up the waste more frequency. (Retaining Wall B) 	<ul style="list-style-type: none"> C&D waste cumulated on site was removed
	<ul style="list-style-type: none"> Stagnant water cumulated under the retaining wall B should be cleaned or provide proper mitigation measure to prevent mosquito breeding. (Under retaining wall B) 	<ul style="list-style-type: none"> Stagnant water cumulated under retaining wall B was cleared.
	<ul style="list-style-type: none"> Broken tarpaulin sheets covering the stockpile were observed. The contractor was reminded to provide proper maintenance for dust control measures to reduce dust impact. 	<ul style="list-style-type: none"> Not required for reminder.
21 June 2016	<ul style="list-style-type: none"> Dust generated at the drilling works was observed. Dust mitigation measures should be provided to reduce dust generation. (Slope E) 	<ul style="list-style-type: none"> No dust generated from the drilling works was observed.
28 June 2016	<ul style="list-style-type: none"> The contractor was reminded to treat the ponding water near the retaining wall B to prevent overflow during the rainstorm. 	<ul style="list-style-type: none"> Not required for reminder.

10.1.4 No outstanding deficiency remained to be rectified in previous Reporting Period which presented in **Table 10-2**.

Table 10-2 Outstanding Items in Site Inspection of previous Reporting Period

Date	Findings / Deficiencies	Follow-Up Status
--	<ul style="list-style-type: none"> NA 	<ul style="list-style-type: none"> NA

10.1.5 Air quality mitigation measures such as watering of site area for 12 times per day and covering of exposed slopes should be implemented during the construction period to reduce construction dust impact as recommended in the EMIS.

- 10.1.6 Good site practice for daily housekeeping is reminded. In addition, clean-up of the waste skips and wastewater treatment system should be increased to ensure these facilities functional and effective.
- 10.1.7 In addition, muddy water or other water pollutants from site surface runoff shall not be discharged into public areas. Water quality mitigation measures to prevent surface runoff into the public areas should be paid on special attention.
- 10.1.8 Stagnant water should be removed as soon as possible after rain to prevent mosquito breeding on site.

Inspection Checklist for Vulnerable to Contaminated Water Discharge

- 10.1.9 Following to the complaint about discharge of milky water to Bufferfuly Beach on 2 September 2015. The Contractor proposed to carry out daily inspection of wastewater treatment facilities, concerned discharge points, drainage inlets and outlets during typhoon or wet season.
- 10.1.10 In addition, specific inspections would also be conducted before and after adverse weather to ensure necessary remedial works would be carried out timely. Should incidental contaminated water discharge be found at the inlet of the associated drainage system, a specific inspection of the relevant drainage pipes would be conducted for traces of deposit, and follow up actions would be taken when necessary.
- 10.1.11 The daily inspection for vulnerable to contaminated water discharge was conducted by the Contractor from **1 to 30 June 2016**. As requested by the EPD, the associated inspection checklist should be presented in the Monthly EM&A Report and it is shown in **Appendix P**.

11 ENVIRONMENTAL COMPLAINT AND NON-COMPLIANCE**11.1 ENVIRONMENTAL COMPLAINT, SUMMONS AND PROSECUTION**

11.1.1 In the Reporting Period, no summons and prosecution under the EM&A Programme was lodged. Moreover, no exceedance of the environmental performance (Action / Limit Levels) was recorded for monitoring programme. However, one (1) environmental complaint was received and lodged for the Contract. Follow up actions have been undertaken by the Contractor to resolve the deficiencies. The details of complaint are listed below:-

- 7 June 2016 - A complaint was received from the EPD on 7 June 2016. The complainant complained that white color effluent discharging outfall at storm outfall of No.33 Ho Yeung Street, Tuen Mun at around 18:00 and this is a follow up of the complaint EP/RW/0000368066 which received on 9 May 2016 and defecated as not project related complain. EPD visit the upstream area and open the cover of manhole at Ho Fuk Street on 21 June 2016. No water discharge was observed and the manhole was clean and dry in condition. During the joint investigation and inspection by EPD, Aecom and the Contractor, it was found that the white water might come from other facilities or site located at Ho Yeung Street which is not related to this project.

11.1.2 During the complaint investigation work, the Contractor was co-operated with the ET in providing all the necessary information and assistance for completion of the investigation. Investigation report (IR) for the complaint has been conducted by the ET and agreed by the IEC. It was concluded that the complaint was not related to the works under the Contract. The IR of the complaint is shown in *Appendix O*.

11.1.3 The statistical summary table of environmental exceedance, complaint, summons and prosecution are presented in *Tables 11-1, 11-2, 11-3 and 11-4*.

Table 11-1 Statistical Summary of Environmental Exceedance

Reporting Period	Environmental Aspect / Parameter	Environmental Performance	Event Exceedance		
			Reporting Month	Previous Months	Cumulative
June 2016	Air Quality - 1-hr TSP	Action Level	0	4	4
		Limit Level	0	0	0
	Air Quality - 24-hr TSP	Action Level	0	0	0
		Limit Level	0	0	0

Table 11-2 Statistical Summary of Environmental Complaints

Reporting Period	Environmental Complaint Statistics				
	Frequency	Cumulative	Complaint Nature		
			Air	Noise	Water
June 2016	1	6	1	NA	5

Table 11-3 Statistical Summary of Environmental Summons

Reporting Period	Environmental Summons Statistics				
	Frequency	Cumulative	Complaint Nature		
			Air	Noise	Water
June 2016	0	0	NA	NA	NA

Table 11-4 Statistical Summary of Environmental Prosecution

Reporting Period	Environmental Prosecution Statistics				
	Frequency	Cumulative	Complaint Nature		
			Air	Noise	Water
June 2016	0	0	NA	NA	NA

- 11.1.4 In the Reporting Period, no warning letter related to environmental issue was received from the EPD or CEDD.

12 IMPLEMENTATION STATUS OF MITIGATION MEASURES**12.1 GENERAL REQUIREMENTS**

12.1.1 The environmental mitigation measures that recommended in the Environmental Mitigation and Enhancement Measures Implementation Schedule (EMIS) for in the Project EM&A Manual covered the issues of air quality, cultural heritage, ecology, landfill gas hazard, landscape & visual, noise, water and waste. The updated EMIS for the Contract is shown in *Appendix M*.

12.1.2 The Contractor shall implement the required environmental mitigation measures according to the EM&A Manual as subject to the site condition. The environmental mitigation measures implemented by the Contract in this Reporting Period are summarized in *Table 12-1* and *Appendix M*.

Table 12-1 Environmental Mitigation Measures

Issues	Environmental Mitigation Measures
Air Quality	<ul style="list-style-type: none"> • Maintain damp / wet surface on access road • Keep slow speed in the sites • All vehicles must use wheel washing facility before off site • Sprayed water during rock breaking works • During transportation by truck, materials loaded lower than the side and tail boards, and covered before transport • Compacted all soil stockpiles • Part of the exposed slopes covered geotextile net
Cultural Heritage	<ul style="list-style-type: none"> • Set a buffer zone between the working area and the Grave • All construction materials and equipment store far from the Grave • Inspection the Grave to ensure provision mitigation measures effective
Ecology	<ul style="list-style-type: none"> • Wire fencing provided for temporary protect Pitcher Plants • Undertake weekly inspection of Pitcher Plants
Landfill Gas Hazard	<ul style="list-style-type: none"> • Landfill Gas measurement undertake during trench excavation
Water Quality	<ul style="list-style-type: none"> • Temporary drainage system provide for surface runoff prevent discharge to public area • Wastewater to be treated by sedimentation tank before discharge.
Noise	<ul style="list-style-type: none"> • Restrain operation time of plants from 07:00 to 19:00 on any working day except for Public Holiday and Sunday. • Keep good maintenance of plants • The noisy plants or works provide mobile noise barriers • Shut down the plants when not in used
Waste and Chemical Management	<ul style="list-style-type: none"> • On-site sorting prior to disposal • Follow requirements and procedures of the “Trip-ticket System” • Predict required quantity of concrete accurately • Collect the unused fresh concrete at designated locations in the sites for subsequent disposal
General	<ul style="list-style-type: none"> • The site was generally kept tidy and clean.

12.2 TENTATIVE CONSTRUCTION ACTIVITIES IN THE COMING MONTH

12.2.1 Construction activities as undertaken in the coming month for the Contract lists below:

- Site Formation – Earthwork on Slope D and E; surface drainage on slope C, D & E and Portion H;
- Toll Plaza Decking TD1 (Portal Beam Construction) and TD2 Section 1;
- Toll Plaza Footbridge;
- Retaining Structure RW_A, RW_B and Slope TP_F;
- Toll Collector Subway & Associated Works Section 1;
- Bridge G1, G2 and Bridge H1 Section 2;
- Sewer Culvert at FC1 and FC2 and Existing Box Culvert;

- Waterproofing and lining at Vehicular Underpass;
- Road and Drainage Works at +11mPD, +19mPD and Portion H.
- Precast panel installation at Retaining Structure RW_B south wall

12.3 KEY ENVIRONMENTAL ISSUES FOR THE COMING MONTH

12.3.1 Key environmental issues to be considered in the coming month include:

- Implementation of dust suppression measures at all times;
- Potential wastewater quality impact due to surface runoff;
- Potential fugitive dust impact due to the dry/loose/exposure soil surface/dusty material;
- Ensure dust suppression measures are implemented properly;
- Sediment catch-pits and silt removal facilities should be regularly maintained;
- Management of chemical wastes;
- Site effluent discharge to the nearby nullah is prohibited;
- Follow-up of improvement on general waste management issues; and
- Implementation of construction noise preventative control measures

13 CONCLUSIONS AND RECOMMENDATIONS

13.1 CONCLUSIONS


- 13.1.1 This is 20th monthly EM&A report presenting the monitoring results and inspection findings for the period of 1st to 30th June 2016.
- 13.1.2 No air quality monitoring including 1-hour and 24-hour TSP exceedance was recorded in the Reporting Period.
- 13.1.3 In the Reporting Period, no noise complaint was received by RE, the Contractor, ENPO or HyD. No Action Level exceedances were therefore triggered and no NOE or the associated corrective actions were required.
- 13.1.4 Site inspection for landscape and visual was conducted on weekly basis by the Landscape Architect to ensure the compliance of the intended aims of the mitigation measures. Most of the landscape works such as planting was not yet commenced.
- 13.1.5 Weekly site inspection and random checking respectively were performed for the transplanted Pitcher Plants in the final receptor site. It was observed that the transplanted pitcher plants were properly protected and the growth was normally in fair condition except three individuals which appeared poor condition in the previous month were certified dead by the specialist. It is considered that the Pitcher Plant were establishing after transplanting shock and adapting to the condition of the Final Receptor Site and frequent watering is recommended.
- 13.1.6 Landfill gas monitoring was conducted at the construction of Retaining Walls B and F by the Safety Officer. The monitoring results shown no exceedances were triggered.
- 13.1.7 In the Reporting Period, one (1) environmental complaint was received from EPD on 7 June 2016 regarding to white color effluent discharging outfall of No.33 at Ho Yeung Street, Tuen Mun. Investigation report for the complaint has been conducted by the ET and agreed by IEC.
- 13.1.8 No notifications of summons, or successful prosecution were received by the Contractor during the Reporting Period.
- 13.1.9 In the Reporting Period, joint site inspection by the RE, ET and the Contractor was carried out on 8th, 15th, 21st and 28th June 2016 and the IEC has attended the joint site inspection on 8th and 28th June 2016. No non-compliance was recorded during the site inspection but 3 observations and 3 reminders were recorded.
- 13.1.10 In the Reporting Period, Grave G1 of inspection was undertaken on 8th, 15th, 21st and 28th June 2016. Based on the inspection findings, the cultural heritage mitigation measures as implemented by the Contractor are fully complied with the EM&A Manual requirements.

13.2 RECOMMENDATIONS

- 13.2.1 Air quality mitigation measures such as watering of site area for 12 times per day and covering of exposed slopes should be implemented during the construction period to reduce construction dust impact as recommended in the EMIS.
- 13.2.2 During the wet season, muddy water or other water pollutants from site surface runoff discharged into public areas would be a potential environmental issue. Special attention should be paid on the water quality mitigation measures to prevent surface runoff flow to public area.
- 13.2.3 Stagnant water should be removed as soon as possible after rain to prevent mosquito breeding on site.

Appendix A

Project Layout Plan

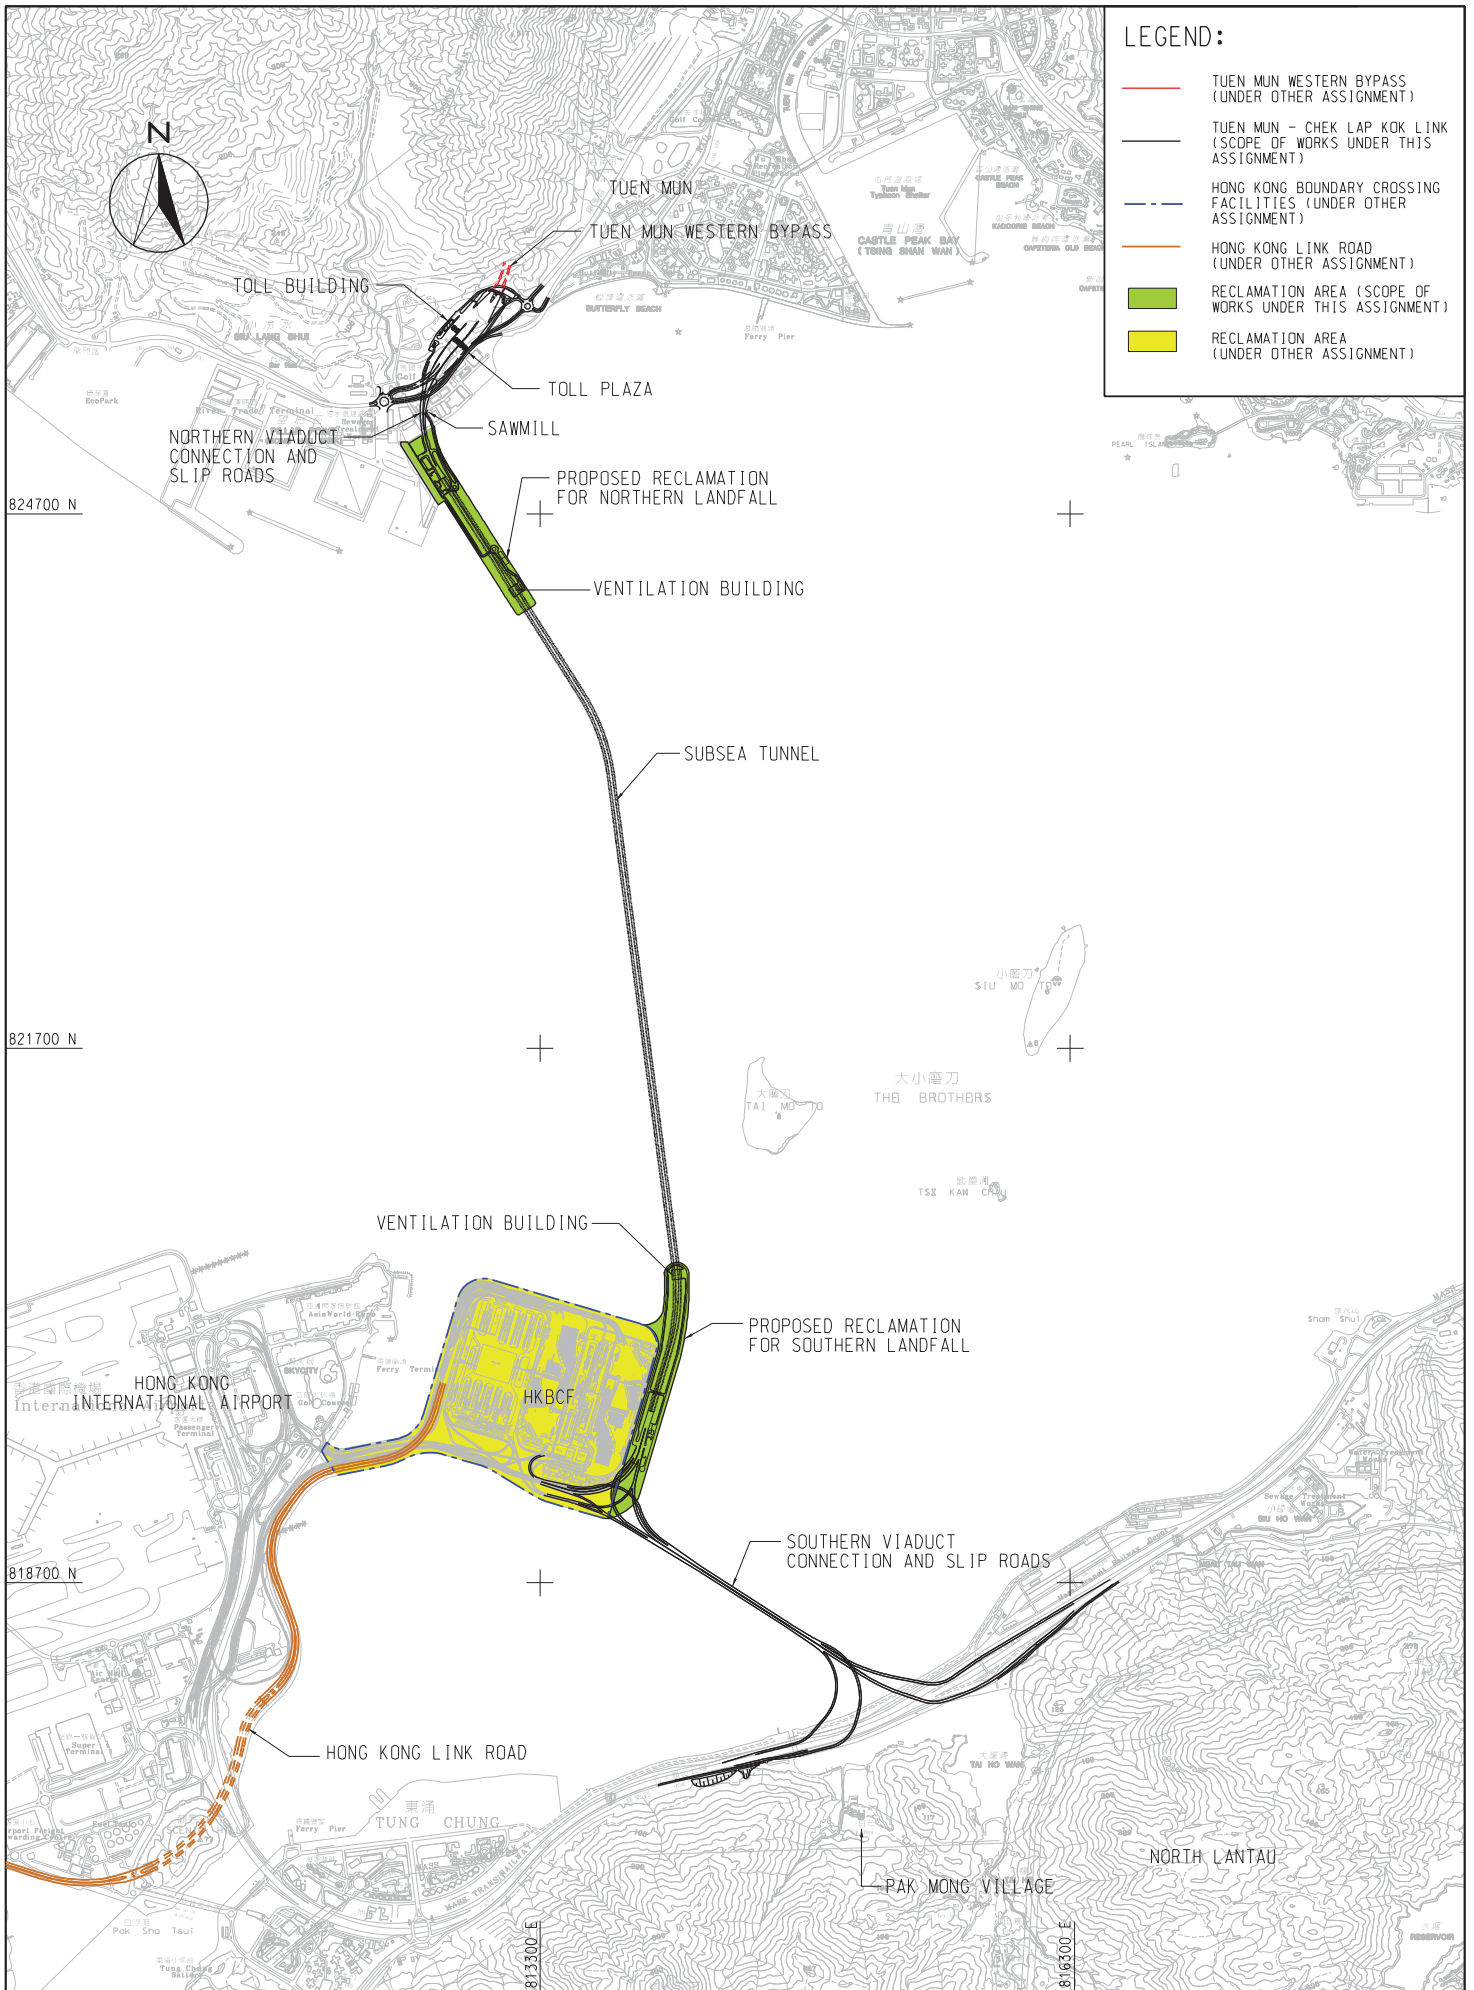

LEGEND:

- TUEN MUN WESTERN BYPASS (UNDER OTHER ASSIGNMENT)
- TUEN MUN - CHEK LAP KOK LINK (SCOPE OF WORKS UNDER THIS ASSIGNMENT)
- HONG KONG BOUNDARY CROSSING FACILITIES (UNDER OTHER ASSIGNMENT)
- HONG KONG LINK ROAD (UNDER OTHER ASSIGNMENT)
- RECLAMATION AREA (SCOPE OF WORKS UNDER THIS ASSIGNMENT)
- RECLAMATION AREA (UNDER OTHER ASSIGNMENT)

PROJECT NO. 60044963

AECOM

AGREEMENT NO. CE 52/2007(HY)
 TUEN MUN - CHEK LAP KOK LINK - INVESTIGATION
GENERAL LAYOUT OF TM-CLKL

SCALE	A3 1:30000	DATE	JUL. 2009
CHECK	--	DRAWN	WYP
JOB No.	60044963	DRAWING No.	Fig 2.1
		REV	A

Appendix B

Layout Plan of the Contract

Project Management Initials: Designer: PI Checked: ALCF Approved: CWN ISO A1 594mm x 841mm
 Plot File by: LINDO 2014/05/19 PATH: P:\Projects\60240249\DRAWING\CONTRACT\C3\1005C3_05E1.dgn



AECOM

PROJECT
項目

TUEN MUN - CHEK LAP KOK LINK

CONTRACT TITLE
TUEN MUN - CHEK LAP KOK LINK - NORTHERN CONNECTION TOLL PLAZA AND ASSOCIATED WORKS

CLIENT
業主

路政署
HIGHWAYS DEPARTMENT
港務大樓香港工程管理局
Hong Kong - Zhuhai - Macao Bridge
Hong Kong Project Management Office

CONSULTANT
工程顧問公司

AECOM Asia Company Ltd.
www.aecom.com

SUB-CONSULTANTS
分判工程顧問公司

ISSUE/REVISION
修訂

I/R	DATE	DESCRIPTION	CHK.
B	MAR. 14	TENDER ADDENDUM NO. 2	CWN
A	FEB. 14	TENDER ADDENDUM NO. 1	CWN
-	JAN. 14	TENDER DRAWING	CWN


STATUS
階段

SCALE
比例

DIMENSION UNIT
尺寸單位

A1:1:1000 METRES

KEY PLAN 1:50000

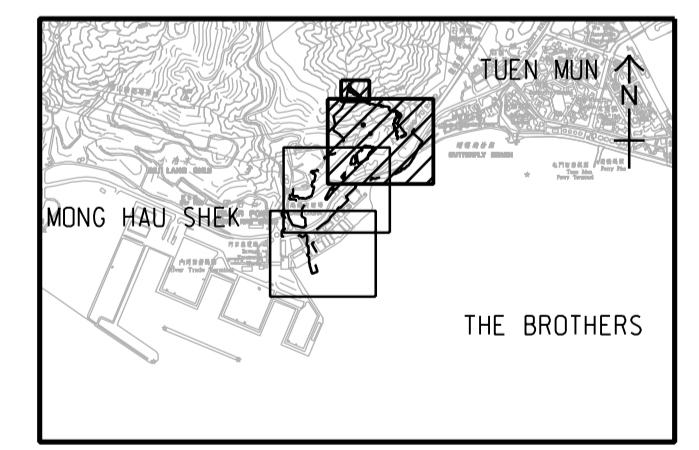

LEGEND:

[Dashed line]	LIMIT OF SITE BOUNDARY
[Hatched pattern]	PORTION X
[Star pattern]	PORTION X1
[Wavy pattern]	PORTION X2
[Dotted pattern]	PORTION A
[Diagonal lines]	PORTION B
[Vertical lines]	PORTION C
[Horizontal lines]	PORTION D
[Cross-hatch]	PORTION E
[Circle pattern]	PORTION F
[Hexagon pattern]	PORTION G
[Triangle pattern]	PORTION H
[Square pattern]	PORTION H1
[Horizontal lines]	PORTION I
[Diagonal lines]	PORTION J
[Cross-hatch]	PORTION K
[Hatched pattern]	AREA 'A'
[Hatched pattern]	AREA 'B' OF PORTION X

- NOTES:**
1. THE DRAWING SHALL BE READ IN CONJUNCTION WITH SHEET NOS. 60240249/C3/1052 TO 1053.
 2. ALL COORDINATES ARE IN HONG KONG (1980) GRID SYSTEM UNLESS OTHERWISE SPECIFIED.
 3. THE CONTRACTOR SHALL COORDINATE WITH HY/2012/08 CONTRACTOR FOR THE ACCESS (INCLUDING AIRSPACE OVER AREA 'A') TO CONSTRUCT THE ELEVATED STRUCTURE ABOVE AREA A OF THE SITE.
 4. THE CONTRACTOR SHALL NOTE THAT ONLY THE AIRSPACE OF THE EXISTING FIRE STATION (AREA 'B') IS AVAILABLE FOR THE CONTRACTOR TO CONSTRUCT THE ELEVATED STRUCTURE. THE CONTRACTOR SHALL OBTAIN FSD'S APPROVAL ON ACCESS, CONSTRUCTION METHODS, DURATIONS AND ANY WORKS AT AREA 'B'.

This drawing has been prepared for the use of AECOM's client. It may not be used, modified, reproduced or relied upon by third parties, except as agreed by AECOM or as required by law. AECOM accepts no responsibility, and denies any liability whatsoever, to any party that uses or relies on this drawing without AECOM's express written consent. All measurements must be obtained from the stated dimensions.

PROJECT NO.
項目編號

CONTRACT NO.
合約編號

60240249 HY/2013/12

SHEET TITLE
圖紙名稱

PORTIONS OF SITE AND SITE BOUNDARY SETTING OUT PLAN


SHEET 1 OF 3

SHEET NUMBER
圖紙編號

60240249/C3/1051B

SETTING OUT COORDINATES OF SITE BOUNDARY

SETTING OUT POINT	COORDINATES	
	EASTING	NORTHING
101	812900.000	826328.165
102	812907.687	826292.657
103	812932.657	826271.462
104	812959.255	826248.939
105	812967.809	826241.968
106	812978.687	826233.842
107	812979.543	826231.975
108	812992.172	826225.845
109	812998.046	826220.987
110	813008.394	826210.180
111	813013.551	826203.523
112	813019.680	826195.595
113	813028.256	826190.669
114	813039.418	826188.327
115	813051.242	826188.103
116	813057.382	826187.067
117	813069.235	826183.229
118	813075.914	826180.992
119	813090.821	826180.083
120	813104.589	826180.783
121	813119.757	826173.560
122	813128.170	826171.228
123	813131.357	826170.082
124	813149.404	826169.990
125	813162.041	826166.283
126	813168.123	826163.136
127	813159.825	826156.924
128	813170.488	826137.774
129	813189.868	826150.598
130	813194.079	826148.129

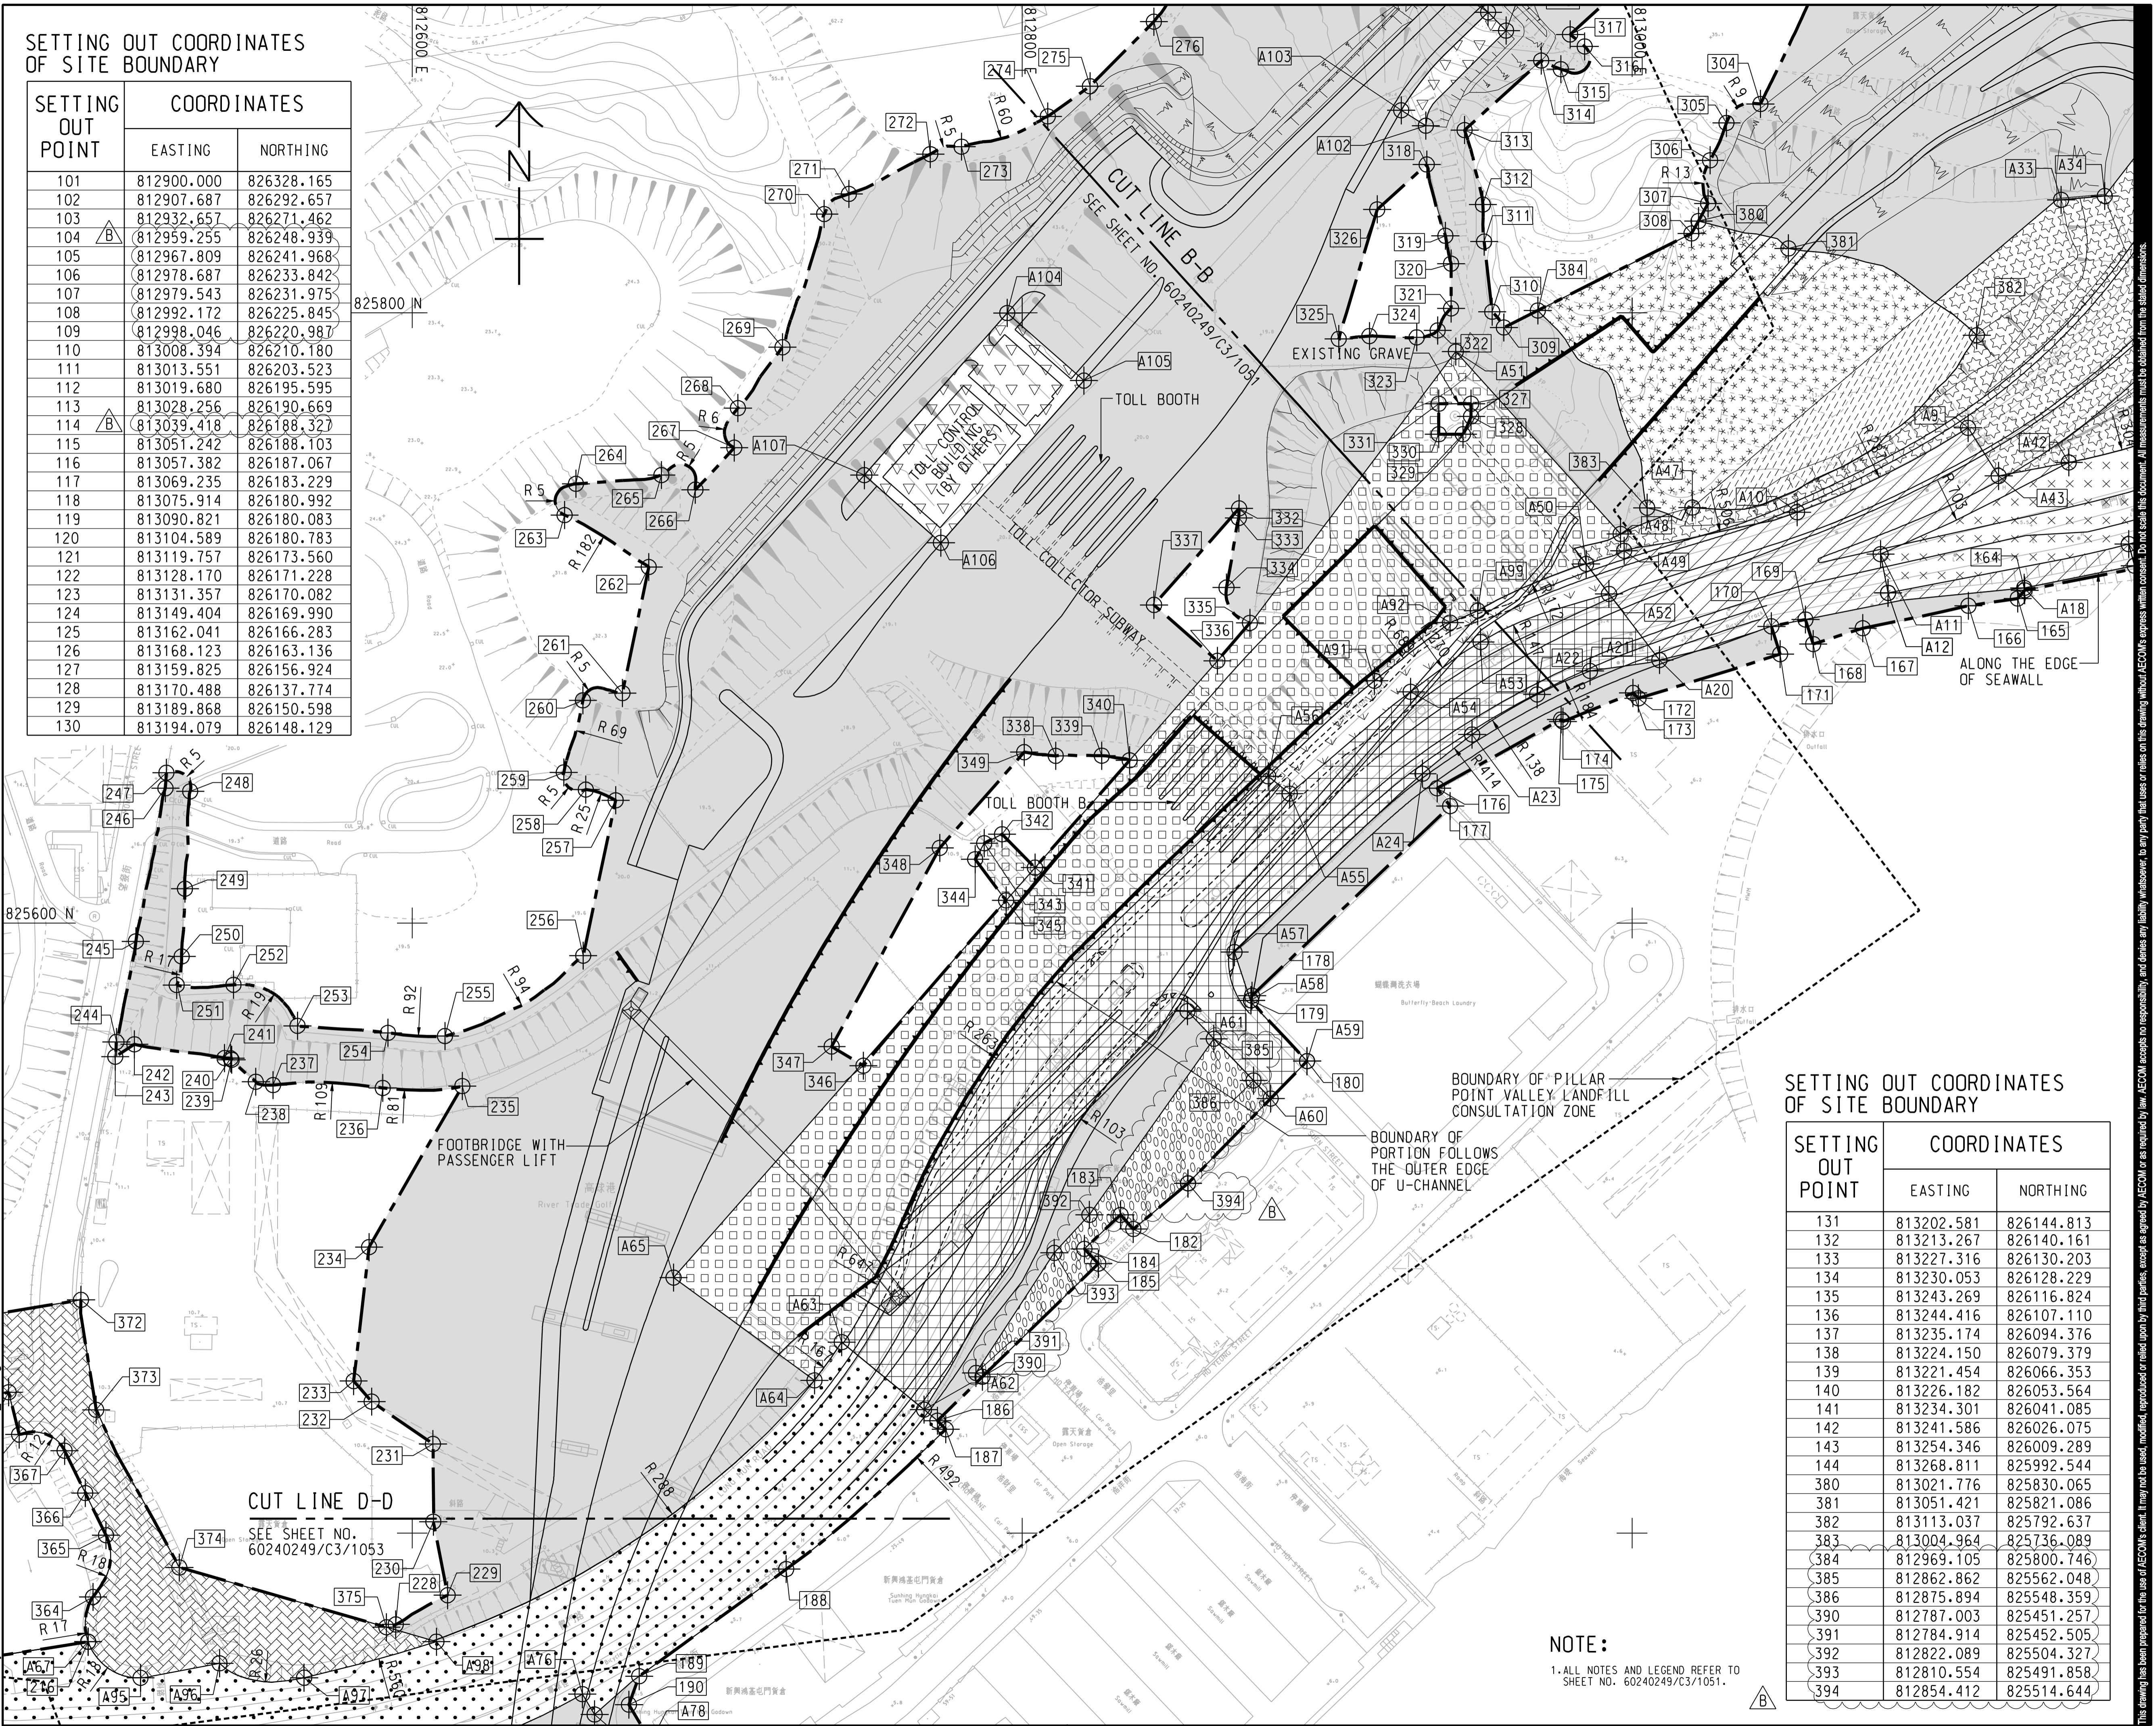

SETTING OUT COORDINATES OF SITE BOUNDARY

SETTING OUT POINT	COORDINATES	
	EASTING	NORTHING
131	813202.581	826144.813
132	813213.267	826140.161
133	813227.316	826130.203
134	813230.053	826128.229
135	813243.269	826116.824
136	813244.416	826107.110
137	813235.174	826094.376
138	813224.150	826079.379
139	813221.454	826066.353
140	813226.182	826053.564
141	813234.301	826041.085
142	813241.586	826026.075
143	813254.346	826009.289
144	813268.811	825992.544
380	813021.776	825830.065
381	813051.421	825821.086
382	813113.037	825792.637
383	813004.964	825736.089
384	812969.105	825800.746
385	812862.862	825562.048
386	812875.894	825548.359
390	812787.003	825451.257
391	812784.914	825452.505
392	812822.089	825504.327
393	812810.554	825491.858
394	812854.412	825514.644

NOTE:
1. ALL NOTES AND LEGEND REFER TO SHEET NO. 60240249/C3/1051.



PROJECT
TUEN MUN - CHEK LAP KOK LINK

CONTRACT TITLE
TUEN MUN - CHEK LAP KOK LINK - NORTHERN CONNECTION TOLL PLAZA AND ASSOCIATED WORKS

CLIENT
路政署
HIGHWAYS DEPARTMENT
港務大樓香港工程管理局
Hong Kong - Zhuhai - Macao Bridge
Hong Kong Project Management Office

CONSULTANT
AECOM Asia Company Ltd.
www.aecom.com

SUB-CONSULTANTS
分列工程顧問公司

ISSUE/REVISION


I/R	DATE	DESCRIPTION	CHK.
B	MAR. 14	TENDER ADDENDUM NO. 2	CWN
A	FEB. 14	TENDER ADDENDUM NO. 1	CWN
-	JAN. 14	TENDER DRAWING	CWN

STATUS

擬定

SCALE
比例
A1 1:1000
DIMENSION UNIT
尺寸單位
METRES

KEY PLAN
索引圖
1:50000

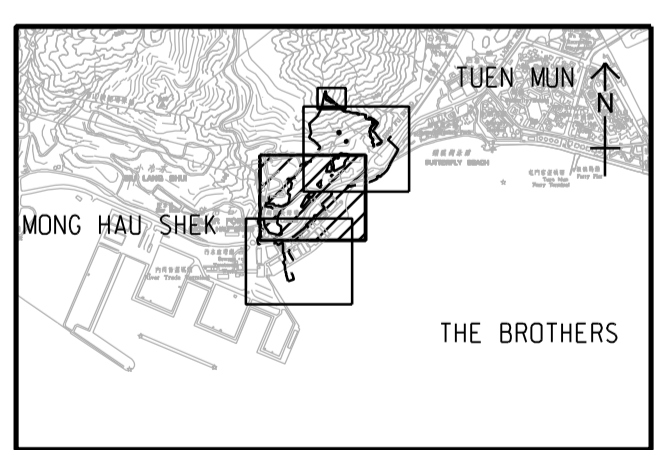


PROJECT NO.
項目編號
60240249
CONTRACT NO.
合約編號
HY/2013/12

SHEET TITLE
圖紙名稱
PORTIONS OF SITE AND SITE BOUNDARY SETTING OUT PLAN
SHEET 2 OF 3

SHEET NUMBER
圖紙編號
60240249/C3/1052B

This drawing has been prepared for the use of AECOM's client. It may not be used, modified, reproduced or relied upon by third parties, except as agreed by AECOM or as required by law. AECOM accepts no responsibility, and denies any liability whatsoever, for any party that uses or relies on this drawing without AECOM's express written consent. Do not scale this document. All measurements must be obtained from the stated dimensions.

Plot File by: LIXQ2 2014/03/4
 PATH: P:\Projects\60240249\DRAWING\CONTRACT\CS1000\C3_1082.dgn
 Project Management Initials: Designer: PL Checked: ALCF Approved: CWN ISO A1 594mm x 841mm

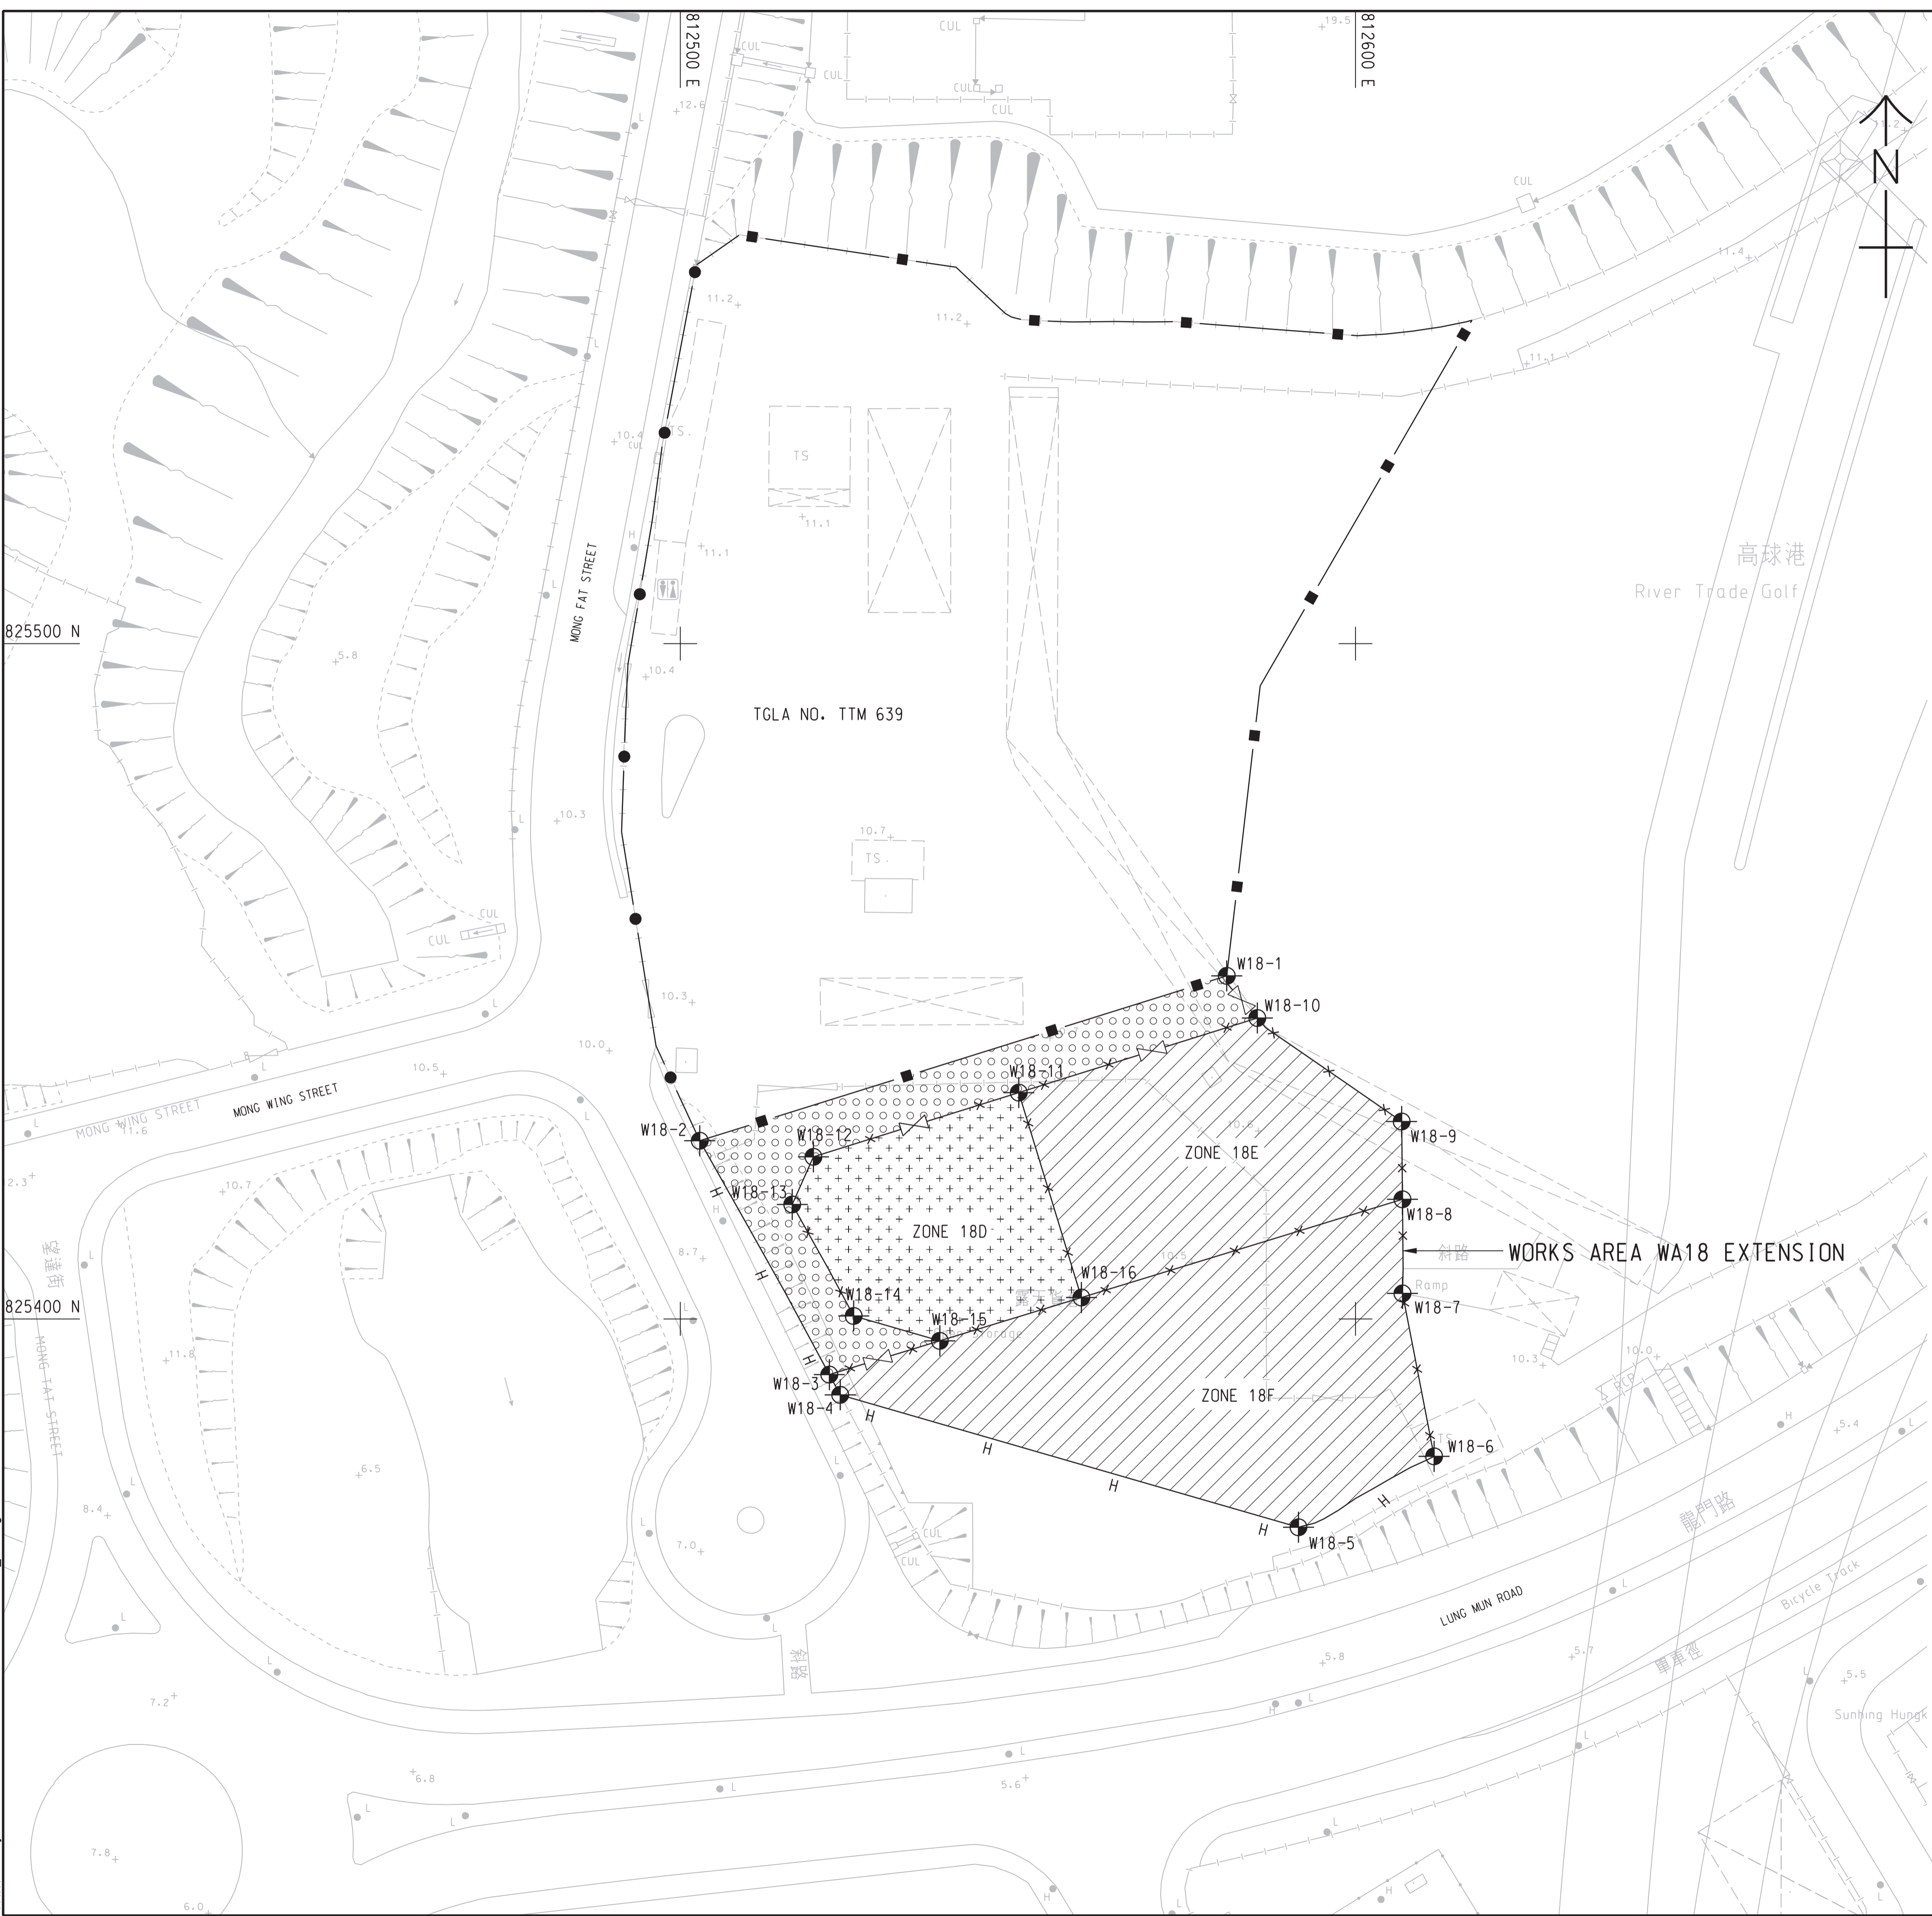

NOTES:

- THIS DRAWING SHALL BE READ IN CONJUNCTION WITH THE WORKS AREA KEY PLAN IN SHEET NO. 60240249/C3/1000.
- DEMARCATON OF THE WORKS AREA SHALL BE DETERMINED ON SITE.
- REFER TO HIGHWAYS DEPARTMENT STANDARD DRAWING NOS. H6110 AND H6111 FOR DETAILS OF HOARDING.
- REFER TO HIGHWAYS DEPARTMENT STANDARD DRAWING NOS. H6121 AND H6122 FOR DETAILS OF CHAIN LINK FENCE.
- REFER TO HIGHWAYS DEPARTMENT STANDARD DRAWING NO. H6121 FOR DETAILS OF GATE.
- CHAIN LINK FENCE SHALL BE ERRECTED ALONG THE WORKS AREA BOUNDARY. THE ALIGNMENT AND EXTENT OF HOARDING AND CHAIN LINK FENCE SHOWN ARE INDICATIVE ONLY AND SHALL BE CONFIRMED BY THE ENGINEER.
- THE LOCATION AND WIDTH OF GATE SHOWN ARE INDICATIVE ONLY AND SHALL BE CONFIRMED BY THE ENGINEER.
- THE SETTING OUT INFORMATION AND WORKS AREA CONDITIONS SHOWN IN THIS DRAWING ARE FOR REFERENCE ONLY. THE WORKS AREA BOUNDARY SHALL BE IN ACCORDANCE WITH THE ENGINEERING CONDITIONS FOR TEMPORARY GOVERNMENT LAND ALLOCATION NO. GLA-TM 639. IN CASE OF DISCREPANCY BETWEEN THE BOUNDARY SHOWN ON THIS DRAWING AND THE BOUNDARY INDICATED ON THE ENGINEERING CONDITIONS, THE LATTER SHALL PREVAIL.
- THE WORKS AREAS SHOWN ON THIS DRAWING ARE TO BE SHARED-USED AMONG THE TM-CLKL RELATED CONTRACTS. THE AREAS HATCHED WITH ARE TENTATIVELY ALLOCATED FOR THE USE BY THE CONTRACT.
- THE COMMON AREA SHALL BE CONCRETE PAVED BY THE CONTRACTOR.
- ZONE 18F SHALL BE USED FOR THE SITE ACCOMMODATION OF THE ENGINEER. ZONE 18E SHALL BE USED FOR SITE ACCOMMODATION OF THE CONTRACTOR.
- ZONE 18D IS TO BE USED BY THE CONTRACTOR OF CONTRACT NO. HY/2012/08-TUEN MUN-CHEK LAP KOK LINK-NORTHERN CONNECTION SUB-SEA TUNNEL SECTION TO STORE PLANT AND EQUIPMENT ASSOCIATED WITH THE TBM TUNNELS FROM THE DATE FOR COMMENCEMENT OF THE WORKS TO 126 DAYS FROM THE DATE FOR COMMENCEMENT OF THE WORKS. THE CONTRACTOR SHALL LIAISE AND PROVIDE FREE AND UNOBSTRUCTED 24-HOUR ACCESS FOR THE CONTRACTOR OF CONTRACT NO. HY/2012/08 TO ZONE 18D. THE CONTRACTOR SHALL BE GIVEN THE POSSESSION OF ZONE 18D IN ACCORDANCE WITH APPENDIX TO FORM OF TENDER-P.3.

LEGEND:

- WORKS AREA FOR THE CONTRACT
- COMMON AREA (MAINTAINED UNDER THE CONTRACT) TO BE SHARED-USED WITH OTHER CONTRACTS
- AREA TO BE USED BY THE CONTRACTOR OF CONTRACT NO. HY/2012/08 AND WORKS AREA FOR THIS CONTRACT TO BE EARLY HANDED OVER BY THE CONTRACTOR (SEE NOTES NO. 12 ABOVE)
- HOARDING AND GATE (TO BE ERRECTED AND MAINTAINED UNDER THIS CONTRACT)
- EXISTING CHAIN LINK FENCE MAINTAINED BY OTHERS
- CHAIN LINK FENCE AND GATE (TO BE ERRECTED AND MAINTAINED UNDER THIS CONTRACT)
- EXISTING HOARDING AND GATE MAINTAINED BY OTHERS

SETTING OUT CO-ORDINATES OF WORKS AREA WA18 EXTENSION

POINT	CO-ORDINATES	
	EASTING	NORTHING
W18-1	812580.934	825450.791
W18-2	812502.880	825426.380
W18-3	812522.068	825391.750
W18-4	812523.679	825388.756
W18-5	812591.556	825369.151
W18-6	812611.638	825379.647
W18-7	812606.954	825403.769
W18-8	812606.951	825417.705
W18-9	812606.832	825429.231
W18-10	812585.456	825444.557
W18-11	812550.126	825433.508
W18-12	812519.715	825423.997
W18-13	812516.580	825416.947
W18-14	812525.682	825400.438
W18-15	812538.435	825396.754
W18-16	812559.404	825403.166

AECOM

PROJECT
項目

TUEN MUN - CHEK LAP KOK LINK

CONTRACT TITLE
TUEN MUN - CHEK LAP KOK LINK - NORTHERN CONNECTION TOLL PLAZA AND ASSOCIATED WORKS

CLIENT
業主

路政署
HIGHWAYS DEPARTMENT
港務處大樓香港工程發展處
Hong Kong - Zhuhai - Macao Bridge
Hong Kong Project Management Office

CONSULTANT
工程師有限公司

AECOM Asia Company Ltd.
www.aecom.com

SUB-CONSULTANTS
分判工程師有限公司

ISSUE/REVISION
修訂

NO.	DATE	DESCRIPTION	CHK.
B	MAR. 14	TENDER ADDENDUM NO. 2	CWN
A	FEB. 14	TENDER ADDENDUM NO. 1	CWN
-	JAN. 14	TENDER DRAWING	CWN

STATUS
階段

SCALE
比例

A1 1:500

DIMENSION UNIT
尺寸單位

METRES

KEY PLAN
索引圖

PROJECT NO.
項目編號

60240249

CONTRACT NO.
合約編號

HY/2013/12

SHEET TITLE
圖紙名稱

WORKS AREA AND HOARDING PLAN


SHEET NUMBER
圖紙編號

60240249/C3/1062B

This drawing has been prepared for the use of AECOM's client. It may not be used, modified, reproduced or relied upon by third parties, except as agreed by AECOM or as required by law. AECOM accepts no responsibility, and denies any liability whatsoever, to any party that uses or relies on this drawing without AECOM's express written consent. Do not scale this document. All measurements must be obtained from the stated dimensions.

Appendix C

Organization of the Contract

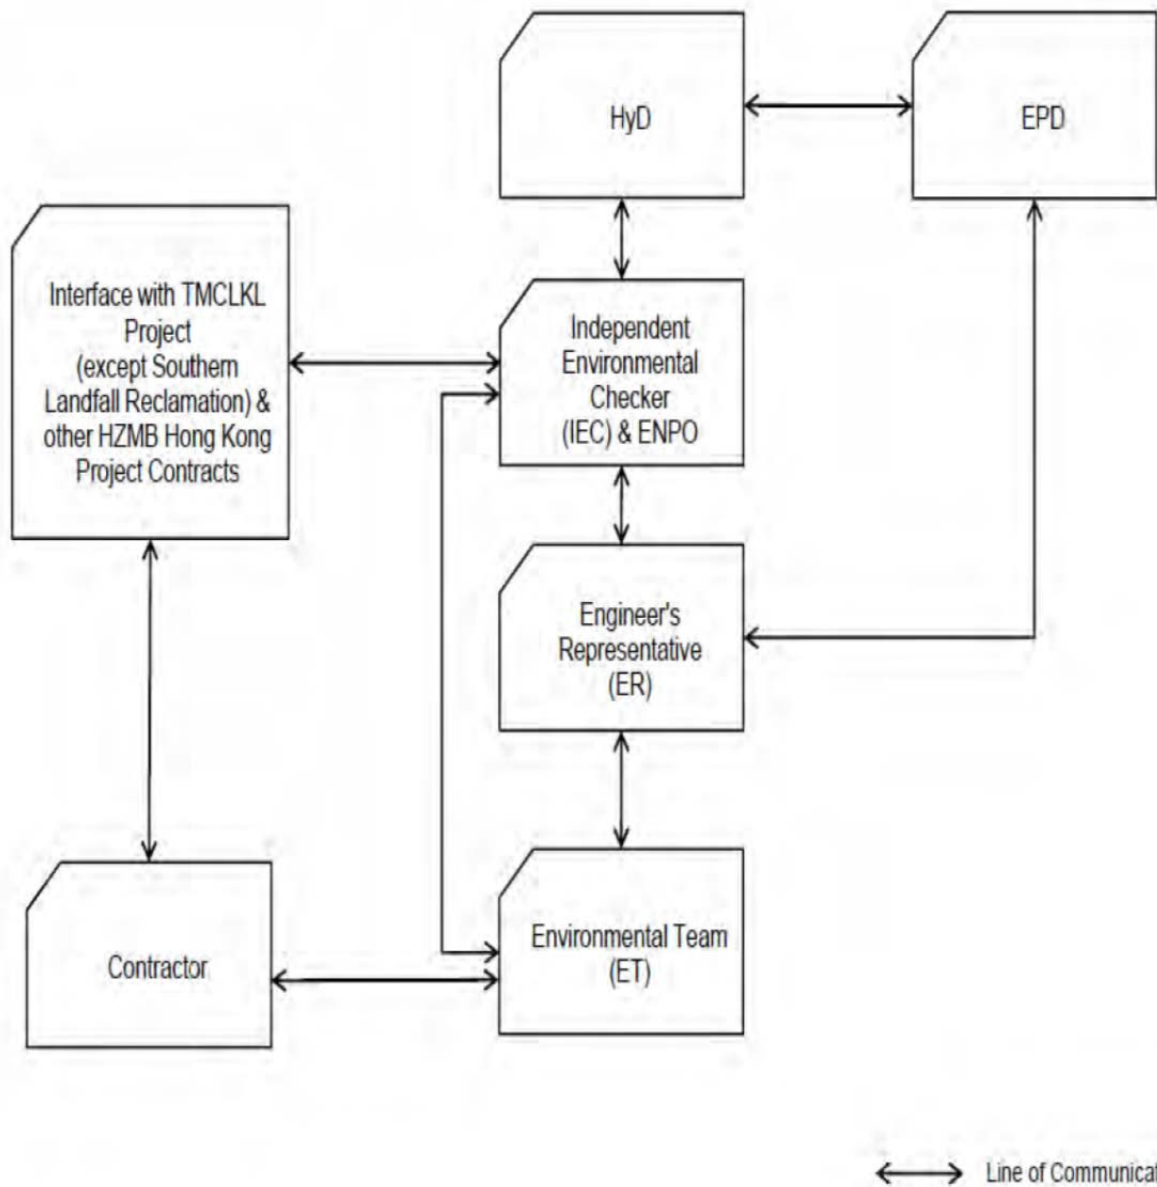

Project Organization chart

Contact Details of Key Personnel for the Contract HY/2013/12

Organization	Project Role	Name of Key Staff	Tel No	Fax No.
HyD	Employer	Mr. Stephen W.C. Chan	2762 3669	3188 6614
AECOM	Principal Resident Engineer	Mr. S.W. Fok	2218 7209	2218 7399
AECOM	Chief Resident Engineer	Mr. Roger Man	2218 7288	2218 7399
AECOM	Resident Engineer (S&E)	Mr. Kelvin Yeung	22187289	2218 7399
Ramboll Environ	Environmental Project Office (ENPO)	Mr. YH Hui	3547 2133	3465 2899
RAMBOLL - ENVIRON	Independent Environmental Checker (IEC)	Dr. FC Tsang	3547 2134	3465 2899
CKJV	Deputy Project Manager	Mr. Raymond Suen	2253 8309	2253 8399
CKJV	Site Agent	Mr. Wilson Lau	2253 8300	2253 8399
CKJV	Safety and Environmental Manager	Mr. Winson Chung	2273 3185	2375 3655
CKJV	Environmental Officer	Mr. HY Tang	2253 8300	2253 8399
CKJV	Environmental Supervisor	Miss Melody Tong	2253 8300	2253 8399
AUES	Environmental Team Leader	Mr. T. W. Tam	2959 6059	2959 6079
AUES	Environmental Consultant	Miss Nicola Hon	2959 6059	2959 6079
AUES	Environmental Consultant	Mr. Ben Tam	2959 6059	2959 6079
HKL	Registered Landscape Architect	Kenneth Ng	2866 3903	--

Legend:

HyD (Employer) –Highways Department

AECOM (Engineer) – AECOM Asia Co. Ltd.

CKJV (Main Contractor) – CRBC-Kaden Joint Venture

Ramboll Environ (ENPO and IEC) – Ramboll Environ Hong Kong Limited

AUES (ET) – Action-United Environmental Services & Consulting

HKL(RLA) – Hong Kong Landscape

Appendix D

Three-Months Rolling Programme

Activity ID	Activity Name	Original Duration	Start	Finish	Total Float	2016					
						May	Jun	Jul	Aug	Sep	
HY/2013/12 TMCLK Northern Connection Toll Plaza and Associated-Works Programme-Rev.4A Monthly											
Site Possession Dates											
PPD1130	Portion J Possession Date	0	20-06-16	20-06-16	428						
Programming / Reporting											
Detailed Works Programme (DWP)											
PR20170	Acceptance of the DWP	0	09-02-15 A	09-02-15 A							
Instrumentation and Monitoring											
Utility Settlement Marker											
IM60020	Installation of USM-Remain USM	90	22-11-14 A	09-10-15 A							
Toll Plaza Decking TD1-Section 1											
Stage 1											
Design Submission and Approval											
TD120150	Engineer's comments	23	23-05-15 A	04-06-15 A							
TD120120	Prepare & submit DDA Drawings w/ICE cert (precast beam)	23	23-07-15 A	27-07-15 A							
TD120160	Prepare & submit DDA drawing w/ICE cert (decking)	23	05-06-15 A	12-11-15 A							
TD120170	Acceptance of the DDA Drawing	23	13-11-15 A	26-01-16 A							
TD120220	TWD -Formwork design for in-situ deck	24	20-06-16	18-07-16	76						
Method Statement Submission and Approval											
TD121340	Engineer's comments and approval	24	01-06-15 A	02-06-15 A							
TD121350	MSS for in-situ deck	24	17-08-15 A	15-08-16	76						
TD121360	Engineer's comments and approval	24	19-08-15 A	18-08-16	76						
Field Works											
Foundation & Substructure at Central Divider of Lung Mun Road											
GI											
TD121070	Pre-drilling works TD1 A1-K1	30	12-01-15 A	07-04-15 A							
TD121050	Traffic diversion for central divider(G.I)	26	04-03-15 A	07-04-15 A							
TD121060	Trial pit and monitoring point installation	10	07-03-15 A	14-08-15 A							
Portal Construction											
Portal Beam 5th(E)											
TD121220	Portal beam 5th(Portal E -Pier 11 to Pier 13)	60	10-03-16 A	10-04-16 A							
Portal Beam 6th(D)											
TD121230	Portal beam 6th(Portal D -Pier 8 to Pier 10)	60	22-04-16 A	15-05-16 A							
Portal Beam 7th(C)											
TD121240	Portal beam 7th(Portal C -Pier 5 to Pier 7)	60	07-04-16 A	01-05-16 A							
Portal Beam 8th(B)											
TD121250	Portal beam 8th(Portal B -Pier 3 to Pier 4)	60	20-06-16	05-09-16	145						
Portal Beam 9th(K)											
TD121260	Portal beam 9th(Portal H -Pier 22 to Pier 23)	61	22-04-16 A	19-05-16 A							
Deck Construction											
Cast in-situ deck between Pier A and Pier B											
TD120640	Portal construction	56	23-05-16 A	15-06-16 A							
TD120650	Falsework installation	55	17-08-16	27-10-16	1						
Precast beam fabrication											
TD120720	Precast beam(Type 1 total-10 nos)	21	30-12-15 A	04-02-16 A							
TD120730	Precast beam(Type 1 total-12 nos)	24	16-02-16 A	17-03-16 A							
TD120740	Precast beam(Type 1 total-13nos)	26	10-03-16 A	15-06-16 A							
TD120750	Precast beam(Type 1 total-8 nos)	16	15-06-16 A	05-07-16	200						
TD120760	Precast beam(Type 1 total-8 nos)	16	06-07-16	25-07-16	208						
TD120770	Precast beam(Type 1 total-7 nos)	14	26-07-16	11-08-16	269						
TD120780	Precast beam(Type 1 total-6 nos)	13	12-08-16	27-08-16	269						
Toll Plaza Decking TD2-Section 1											
Method Statement Submissions and Approval											
TD220120	MSS for deck construction	75	30-11-15 A	14-12-15 A							
Field Works											
G.I and Piling Works											
DWP-Bored Piles											
TD220480	Working platform for pile cap L1-L3	13	08-05-15 A	21-08-15 A							
TD220490	Bored piles for P6-P11	60	12-06-15 A	03-10-15 A							
Base Slab & Pile Cap Construction											
		117	21-07-15 A	05-04-16 A							

█ Remaining Level of Effort █ Critical Remaining Work
█ Actual Work ◆ Milestone
█ Remaining Work ⇨ Summary

**CRBC - Kaden JV
Two-Month Rolling Programme**

Date	Revision	Checked	Approved
24-06-16			

Activity ID	Activity Name	Original Duration	Start	Finish	Total Float	2016				
						May	Jun	Jul	Aug	Sep
Abutment K-Base Slab										
TD220550	Preparation works for drainage channel diversion	30	21-07-15 A	15-12-15 A						
TD220555	Drainage channel diversion	21	21-11-15 A	24-11-15 A						
TD220560	ELS for abutment K	51	03-11-15 A	15-12-15 A						
Pile Cap L1-L4										
TD220648	Sheetpile for Pile cap L4	10	14-11-15 A	15-11-15 A						
TD220630	Sheetpile for Pile cap L3	18	20-12-15 A	21-12-15 A						
TD220632	ELS for Pile cap L3	20	21-12-15 A	20-01-16 A						
TD220650	ELS for Pile cap L4	14	16-11-15 A	21-01-16 A						
TD220640	Pile cap L3	15	25-02-16 A	07-03-16 A						
TD220620	Pile cap L2	15	23-02-16 A	12-03-16 A						
Abutment M-Base Slab										
TD220665	New Design for Abutment M from Engineer	0	06-11-15 A	05-04-16 A						
TD220670	ELS for abutment M	55	11-11-15 A	08-03-16 A						
TD220680	Formwork and Reinforcement	45	15-03-16 A	24-03-16 A						
TD220690	Concreting and backfilling	10	30-03-16 A	05-04-16 A						
Abutment and Pier Construction										
Abutment K										
TD220270	Backfill for abutment K	20	13-06-16 A	13-07-16	132					
Pier L2										
TD220290	Pier L2	26	17-03-16 A	09-04-16 A						
Pier L3										
TD220140	Pier L3	26	12-03-16 A	09-04-16 A						
Abutment M										
TD220160	Wall for abutment M	30	04-05-16 A	09-08-16	132					
TD220170	Backfill for abutment M	16	09-08-16	29-08-16	132					
Deck Construction										
TD220000	Construction of walkway	15	13-07-16	02-08-16	145					
Miscellaneous Works										
TD220695	Cascade D construction	60	18-04-16 A	12-08-16	136					
Toll Plaza Footbridge-Section 1										
Stage 1										
Method Statement Submissions and Approval										
TFB1050	MSS for steel truss installation including shop drawings submission	90	04-12-15 A	29-06-16	4					
TFB1070	MSS for staircase construction	40	21-12-15 A	21-10-16	113					
Field Works										
GJ and Foundation Works										
TFB1160	Socketted H-Pile for Pier P3(9 Nos)	18	03-11-14 A	30-11-14 A						
TFB1170	Socketted H-Pile for Pier P2(11 Nos)	36	01-12-14 A	31-12-14 A						
TFB1190	Predrilling works at Pier P1,P5,P7 and West staircase	24	02-01-15 A	25-02-15 A						
Pile Cap Construction										
TFB1230	Construct Pile cap for Pier P3	20	27-07-15 A	20-10-15 A						
TFB1240	Construct pile cap for Pier P2	20	28-03-15 A	24-10-15 A						
Pier Construction										
TFB1250	Construct pier P1(include bearing installation)	42	14-03-16 A	27-07-16	205					
TFB1260	Construct pier P5	42	16-12-15 A	18-08-16	287					
TFB1270	Construct pier P7	42	09-03-16 A	07-09-16	287					
TFB1280	Construct pier P2	42	26-08-15 A	08-09-16	166					
TFB1290	Construct pier P3	42	22-09-15 A	13-09-16	166					
Staircase and Lift Construction										
TFB1350	West staircase construction	48	23-11-15 A	20-07-17	68					
Retaining Structure RW_B-Section 1										
Site Formation - Retaining Structure RW_B										
Stage 1										
Design Submission and Approval										
RWB10310	Alternative Design for RW_B structure	21	15-01-15 A	20-01-15 A						
RWB10380	Engineer's comments and approval	21	16-01-15 A	31-01-15 A						
RWB10300	Engineer's approval	21	14-01-15 A	11-03-15 A						
RWB10320	Engineer's comments	21	09-03-15 A	11-03-15 A						

█ Remaining Level of Effort █ Critical Remaining Work
█ Actual Work ◆ Milestone
█ Remaining Work ⇨ Summary

CRBC - Kaden JV
Two-Month Rolling Programme

Date	Revision	Checked	Approved
24-06-16			

Activity ID	Activity Name	Original Duration	Start	Finish	Total Float	May	Jun	Jul	Aug	Sep
RWB10330	Alternative Design for RW_B structure submission	21	09-03-15 A	24-04-15 A						
RWB10390	Falsework design submission	21	13-04-15 A	04-05-15 A						
RWB10340	Engineer's approval	21	27-03-15 A	06-05-15 A						
RWB10400	Engineer's comments and approval	21	24-04-15 A	06-05-15 A						
Method Statement Submission and Approval		34	07-01-15 A	31-01-15 A						
RWB10410	Method Statement Submission and Approval for Retaining Wall Construction	17	07-01-15 A	13-01-15 A						
RWB10420	Engineer's comments and approval	17	14-01-15 A	31-01-15 A						
Retaining Structure RW_B		174	01-12-14 A	20-10-16	325					
Excavation		129	01-12-14 A	02-07-15 A						
RWB10500	Excavation of RW_B up to approx +6.0 mPD-(Bay11-13)	60	01-12-14 A	13-02-15 A						
RWB10510	Excavation of RW_B up to approx +6.0 mPD-(Bay14-15)	40	01-12-14 A	13-04-15 A						
RWB10530	Predrilling works remaining works	68	01-01-15 A	02-07-15 A						
Structure(Base Slab, Wall, Colume, Top Slab)		133	01-04-15 A	23-06-16	303					
Bay 1-7		85	01-04-15 A	21-09-15 A						
RWB10100	wall and colume-Bay2 to Bay 7	85	01-04-15 A	21-09-15 A						
Bay12-13		60	18-09-15 A	23-06-16	125					
RWB10170	Bay12-13 and backfilling	60	18-09-15 A	23-06-16	125					
Bay14-Bay15		133	15-12-15 A	18-06-16 A						
RWB10210	Foundation works Bay 15	40	15-12-15 A	24-12-15 A						
RWB10220	Bay 14-15	60	07-01-16 A	18-06-16 A						
Backfilling		140	15-07-15 A	20-10-16	325					
RWB10230	Backfilling	40	15-07-15 A	20-07-16	395					
RWB10235	Precast panels installation	90	23-06-16	20-10-16	325					
RW_B Precast Panel		92	23-04-16 A	06-09-16	246					
Precast the Panel		92	23-04-16 A	06-09-16	246					
RWB20000	Precast the Panels(Bay 6-15 nos)	12	20-05-16 A	25-06-16	0					
RWB20010	Precast the Panels(Bay 5-11 nos)	12	20-05-16 A	02-07-16	0					
RWB20020	Precast the Panels(Bay 7-10nos)	12	19-05-16 A	07-07-16	0					
RWB20030	Precast the Panels(Bay 4-12nos)	12	20-06-16 A	20-07-16	0					
RWB20040	Precast the Panels(Bay 8-15nos)	12	25-05-16 A	25-07-16	0					
RWB20050	Precast the Panels(Bay 3-17nos)	12	18-05-16 A	29-07-16	0					
RWB20070	Precast the Panels(Bay 2-5nos)	6	23-04-16 A	01-08-16	10					
RWB20060	Precast the Panels(Bay 9-8nos)	6	01-06-16 A	02-08-16	6					
RWB20080	Precast the Panels(Bay 10-15nos)	12	20-06-16 A	11-08-16	10					
RWB20090	Precast the Panels(Bay 11-9nos)	12	09-08-16	24-08-16	33					
RWB20100	Precast the Panels(Bay 14-12nos)	12	22-08-16	06-09-16	246					
Installation the Panel		64	29-05-16 A	25-08-16	5					
RWB20120	Installation the Panel Bay 6	5	14-06-16 A	04-07-16	4					
RWB20130	Installation the Panel Bay 5	5	04-07-16	09-07-16	4					
RWB20140	Installation the Panel Bay 7	5	09-07-16	16-07-16	4					
RWB20150	Installation the Panel Bay 4	5	21-07-16	26-07-16	0					
RWB20160	Installation the Panel Bay 8	5	05-06-16 A	29-07-16	0					
RWB20170	Installation the Panel Bay 3	9	12-06-16 A	09-08-16	0					
RWB20180	Installation the Panel Bay 9	5	08-06-16 A	13-08-16	0					
RWB20190	Installation the Panel Bay 2	3	29-05-16 A	17-08-16	0					
RWB20200	Installation the Panel Bay 10	7	17-08-16	25-08-16	5					
Toll Collector Subway & Associated Works-Section 1		365	20-10-15 A	18-10-16	209					
Toll Collector Bridge (Portion I)-Section 1		60	20-06-16	29-08-16	207					
Stage 1		60	20-06-16	29-08-16	207					
Temporary Works Design(TWD) Submission and Approval		60	20-06-16	29-08-16	207					
TCS1240	TWD -Design of lifting system	30	20-06-16	25-07-16	207					
TCS1580	Engineer's comments and approval	30	26-07-16	29-08-16	207					
Toll Collector Subway & Associate Works (Portion I)-Section 1		182	03-12-15 A	18-10-16	147					
Stage 1		182	03-12-15 A	18-10-16	147					
Method Statement Submissions and Approval		50	03-12-15 A	18-07-16	126					
TCS1390	MSS for subway structural works	24	03-12-15 A	17-12-15 A						
TCS1630	Engineer's comments and approval	24	20-06-16	18-07-16	126					
Field Works - Toll Collector Subway and Staircase		137	21-03-16 A	18-10-16	119					
TCS1400	Site clearance	24	21-03-16 A	25-05-16 A						

█ Remaining Level of Effort █ Critical Remaining Work
█ Actual Work ◆ Milestone
█ Remaining Work ⇨ Summary

CRBC - Kaden JV
Two-Month Rolling Programme

Date	Revision	Checked	Approved
24-06-16			

Activity ID	Activity Name	Original Duration	Start	Finish	Total Float	2016				
						May	Jun	Jul	Aug	Sep
TCS1420	ELS for (SB22-SB16)	40	21-04-16 A	04-08-16	125	ELS for (SB22-SB16)				
TCS1430	Construction of toll collector subway(from SB22-SB16)	70	19-07-16	18-10-16	119					
Toll Collector Subway (Portion X)-Section 5										
Stage 3										
TCS1100	Excavation Works-S.B 3-8	80	20-10-15 A	14-10-16	162					
Bridge G2										
Stage 2										
Temporary Works Design (TWD) Submission and Approval						Temporary Works Design (TWD) Submission and Approval				
BG23590	DDA for superstructure(draft)	17	09-03-15 A	16-03-15 A						
BG23600	Engineer's comments	17	17-03-15 A	13-04-15 A						
BG23610	DDA for superstructure submission	17	21-04-15 A	29-04-15 A						
BG23620	Engineer's approval	17	20-06-16	09-07-16	180	Engineer's approval				
Method Statement Submissions and Approval										
BG23230	MSS for pier construction	17	02-02-15 A	13-02-15 A						
Field Works										
Pier & Abutment Construction						Pier & Abutment Construction				
BG23450	Construct Pier at G2c-2	32	07-09-15 A	29-04-16 A						
BG23440	Construct Pier at G2c-1	32	04-11-15 A	12-12-15 A						
BG23460	Construct Pier at G2b	36	14-03-16 A	29-04-16 A		Construct Pier at G2b				
Deck										
BG23000	Deck(G2c-G2d2)	90	20-04-16 A	28-09-16	172					
BG23010	Deck(G2d2-G2e2)&Construct Portal G2c	75	08-08-16	14-11-16	172					
BG23040	Deck(G2e-G2d1)	60	04-04-16 A	13-02-17	172					
Bridge G1										
Stage 2										
Design Submission and Approval						Design Submission and Approval				
BG112300	Engineer's approval	21	20-06-16	14-07-16	210	Engineer's approval				
Method Statement Submissions and Approval										
BG112330	MSS-substructure construction	24	09-02-15 A	13-02-15 A						
Off-site Works						Off-site Works				
BG112000	Form traveller fabrication	90	21-01-16 A	29-06-16	213	Form traveller fabrication				
Field Works						Field Works				
Substructure Works from Pier G1d to Pier G2a						Substructure Works from Pier G1d to Pier G2a				
BG112130	Pierhead segment construction at Pier G1d	40	20-06-16	09-08-16	152	Pierhead segment construction at Pier G1d				
Deck Construction from Pier G1d to Pier G2a						Deck Construction from Pier G1d to Pier G2a				
BG112462	Completion of Pier at G2a	0	20-06-16	20-06-16	121	Completion of Pier at G2a				
Bridge H1-Section 2						Bridge H1-Section 2				
Stage 2						Stage 2				
Design Submission and Approval						Design Submission and Approval				
BH12800	Engineer's comments	17	09-12-14 A	02-01-15 A						
BH12830	DDA for superstructure(draft)	17	09-03-15 A	16-03-15 A						
BH12810	DDA for substructure submission	17	02-01-15 A	16-04-15 A						
BH12820	Engineer's approval	17	18-02-15 A	30-05-15 A						
BH12680	TWD -Formwork design for pier	24	18-08-15 A	28-08-15 A						
BH12690	TWD -Pierhead construction	24	02-11-15 A	09-11-15 A						
BH12860	Engineer's approval	17	20-06-16	09-07-16	65	Engineer's approval				
Method Statement Submissions and Approval										
BH12370	MSS-substructure construction	24	09-02-15 A	13-02-15 A						
Off-site Works						Off-site Works				
BH12720	Form traveller fabrication	90	21-01-16 A	29-06-16	43	Form traveller fabrication				
Field Works						Field Works				
Foundation Works& Pier construction						Foundation Works& Pier construction				
Foundation Works										
BH12580	Bored piles and Foundation for H1d	65	11-04-15 A	30-12-15 A						
Pier construction						Pier construction				
BH12886	Pierhead segment construction at Pier H1e	40	28-04-16 A	02-07-16	0	Pierhead segment construction at Pier H1e				
BH12558	Pierhead segment construction at Pier H1d	40	20-06-16	09-08-16	236	Pierhead segment construction at Pier H1d				
Culvert 1(TBM)-Stage 4						Culvert 1(TBM)				
Field Works						Field Works				

█ Remaining Level of Effort █ Critical Remaining Work
█ Actual Work ◆ Milestone
█ Remaining Work ⇨ Summary

**CRBC - Kaden JV
Two-Month Rolling Programme**

Date	Revision	Checked	Approved
24-06-16			

Activity ID	Activity Name	Original Duration	Start	Finish	Total Float	May	Jun	Jul	Aug	Sep
TBM Driving										
CUL13090	TBM preparation	36	13-02-15 A	12-05-15 A						
Receiving Pit										
CUL13130	Trial trench	7	09-01-15 A	16-01-15 A						
CUL13140	ELS	72	04-02-15 A	23-03-15 A						
FC1										
CUL13395	Liasion with CLP and temporary diversion for 11kv cable for construction of FC1	89	17-12-14 A	10-03-15 A						
FC2										
CUL13450	Sheetpile installation for FC2	21	04-03-15 A	14-05-15 A	452					
CUL13470	Construction of chamber FC2	30	20-02-16 A	11-07-16	452					
CUL13480	Backfilling and removal section of sheetpile	14	11-07-16	28-07-16	452					
BY-Pass Sewer between FC1 and FC2(1800 Pipe)										
CUL13510	Backfilling	14	21-03-16 A	22-06-16	452					
Completion of KD3A and Remaining Works										
CUL13535	Backfilling	70	20-06-16	29-08-16	550					
Culvert 2 & Culvert 3 and Existing Box Culvert										
Method statement Submission										
CCE20140	Method statement for screeding the existing box culvert	24	20-06-16	18-07-16	372					
Culvert 2										
CCE20080	MH3 construction	65	20-02-16 A	04-08-16	225					
CCE20090	Bay 21	50	04-08-16	08-10-16	257					
Culvert 3										
CCE20085	MH6 construction	65	05-04-16 A	29-08-16	225					
Site Formation - Retaining Structure RW_A										
Stage 3										
Retaining Wall A										
RWA20100	Tree works (Portion 1)	24	21-09-15 A	21-01-16 A						
RWA20110	Site clearance and tree felling	12	25-01-16 A	14-05-16 A						
RWA20130	Install ELS and Excavation (Soil: 10,298m3)	80	01-02-16 A	04-08-16	158					
RWA20140	Construct Retaining Wall A from TD2 Abutment M to MJ 11-Base slab	20	05-08-16	29-08-16	158					
RWA20150	Construct Cascade D	24	18-04-16 A	07-11-16	158					
RWA20160	Drainage Diversion of Existing Stream to Cascade D	12	18-04-16 A	19-11-16	158					
RWA20170	Construct Retaining Wall A from Bay MJ11 to CH357.8-Base slab	30	23-02-16 A	14-12-16	158					
RWA20175	Construct Retaining Wall A from Bay MJ11 to CH357.8-Wall construction	42	13-04-16 A	23-01-17	158					
Site Formation - Retaining Structure for Slope TP_F										
Stage 3										
Retaining Structure for Slope TP_F										
RWF31350	Backfilling	24	17-12-15 A	23-06-16	228					
RWF31470	Backfilling	60	01-02-16 A	25-06-16	336					
RWF31480	U-Channel construction,Completion civil provision works for TCSS and E&M	72	27-06-16	27-09-16	404					
Site Formation - Slope TP_A & Associated Works										
Stage 3										
Slope Feature - Slope TP_A										
TPA41110	Raking Drain Construction for slope A1	8	20-10-14 A	23-10-14 A						
TPA41120	U-channel (140m) and Berm for slope A1	21	18-11-14 A	30-11-14 A						
TPA41130	Laying Erosion Control Mat for slope A1	3	11-11-14 A	30-11-14 A						
TPA41180	Excavation of Soil (9323m3) for slope A3	40	01-10-14 A	02-12-14 A						
TPA411400	Excavation of Soil (9200m3) for slope A2	20	21-10-14 A	02-12-14 A						
TPA41150	Raking Drain Construction for slope A2	16	24-11-14 A	24-12-14 A						
TPA41160	U-channel and Berm for slope A2	21	30-11-14 A	31-12-14 A						
TPA41170	Laying Erosion Control Mat for slope A2	3	02-12-14 A	31-12-14 A						
TPA41190	Excavation of Rock (8850m3) for slope A3	70	02-12-14 A	08-04-15 A						
TPA41350	Forming East Portal Formation and temporary ground drainage works	50	10-03-15 A	20-06-16	117					
Site Formation - Slope TP_B & Associated Works										
Stage 3										
Slope Feature - Slope TP_B										
TPB40900	Laying Erosion Control Mat for slope B2	3	10-11-14 A	13-11-14 A						
TPB40800	U-channel (220m) and Berm for slope B2	21	26-11-14 A	10-12-14 A						
TPB41000	Excavation of Soil (11,200m3) for slope B3	40	14-11-14 A	30-12-14 A						

█ Remaining Level of Effort █ Critical Remaining Work
█ Actual Work ◆ Milestone
█ Remaining Work ⇨ Summary

CRBC - Kaden JV
Two-Month Rolling Programme

Date	Revision	Checked	Approved
24-06-16			

Activity ID	Activity Name	Original Duration	Start	Finish	Total Float	2016				
						May	Jun	Jul	Aug	Sep
TPB41210	U-channel (part) and Berm for slope B3	21	02-03-15 A	20-06-16	393	U-channel (part) and Berm for slope B3				
TPB41220	Laying Erosion Control Mat for slope B3	3	20-04-15 A	20-06-16	393	Laying Erosion Control Mat for slope B3				
TPB43600	Forming road formation and temporary ground drainage works	14	20-04-15 A	20-06-16	393	Forming road formation and temporary ground drainage works				
Site Formation - Slope TP_C & Associated Works		50	18-12-14 A	22-08-16	272	Site Formation - Slope TP_C				
Stage 3		8	18-12-14 A	12-01-15 A						
Slope Feature - Slope TP_C		8	18-12-14 A	12-01-15 A						
TPC50600	Raking Drain Construction for slope C1	8	18-12-14 A	12-01-15 A						
Achievement of KD-3(Stage 3) for Slope C		50	20-06-16	22-08-16	272	Achievement of KD-3(Stage 3) for Slope C				
TPC51310	Remaining civil works	50	20-06-16	22-08-16	272	Remaining civil works				
Site Formation - Slope TP_D & Associated Works		199	20-01-15 A	01-11-16	220	Site Formation - Slope TP_D				
Stage 3		199	20-01-15 A	01-11-16	44					
Slope Feature - Slope TP_D		199	20-01-15 A	01-11-16	44					
TPD51350	U-channel (100m) and Berm for slope D1, D2a and D2b	11	20-01-15 A	01-02-15 A						
TPD51400	Excavation of Rock (4,670m3) for slope D3a, D3b and D4	40	01-02-15 A	30-03-15 A						
TPD52800	Forming West Portal Formation and temporary ground drainage works	10	21-01-16 A	29-06-16	109	Forming West Portal Formation and temporary ground drainage works				
TPD51750	U-channel (150m) and Berm for slope D6a and D6b	21	06-07-15 A	09-07-16	44	U-channel (150m) and Berm for slope D6a and D6b				
TPD51753	Remaining works in Portion D	88	20-01-16 A	01-11-16	44					
Achievement of KD-3(Stage 3) for Slope D		88	02-07-16	24-10-16	225	Achievement of KD-3(Stage 3) for Slope D				
TPD52350	Remaining civil works and drainage works	88	02-07-16	24-10-16	225	Remaining civil works and drainage works				
Site Formation - Slope TP_E & Associated Works		688	13-11-14 A	22-12-16	197	Site Formation - Slope TP_E				
Stage 3		688	13-11-14 A	22-12-16	197					
Slope Feature - Slope TP_E at Toll Control Building Area		330	13-11-14 A	07-09-16	0					
TPE61120	Soil Nail RowB Level + 59.20 (Install and grouting)	25	02-02-15 A	05-02-15 A						
TPE61180	Mapping & Dowelling	15	13-11-14 A	20-06-16 A		Mapping & Dowelling				
TPE61210	Excavation of Rock for slope E3b - stage 1	75	07-01-15 A	20-06-16 A		Excavation of Rock for slope E3b - stage 1				
TPE61220	Excavation of Rock for slope E3b - stage 2	75	28-02-15 A	20-06-16 A		Excavation of Rock for slope E3b - stage 2				
TPE61170	Excavation of Rock for slope E2b - stage 2	75	31-12-14 A	20-06-16 A		Excavation of Rock for slope E2b - stage 2				
TPE61230	Excavation of Rock for slope E3b - stage 3	75	26-03-15 A	11-07-16	0	Excavation of Rock for slope E3b - stage 3				
TPE61240	Excavation of Rock for slope E3b - stage 4	75	25-05-15 A	18-08-16	0	Excavation of Rock for slope E3b - stage 4				
TPE61250	Mapping & Dowelling	16	19-08-16	07-09-16	0	Mapping & Dowelling				
Slope Feature - Slope TP_E Remaining Section and SSE-D/C116		675	02-01-15 A	22-12-16	197					
TPE62150	Excavation of Soil/Rock (13,900m3) for slope E2c	90	02-01-15 A	31-01-15 A						
TPE62190	U-channel (200m) and Berm for slope E2c	40	21-10-15 A	20-06-16 A		U-channel (200m) and Berm for slope E2c				
TPE62210	Excavation of Rock for slope E3c - stage 1	75	23-04-15 A	20-06-16 A		Excavation of Rock for slope E3c - stage 1				
TPE62220	Excavation of Rock for slope E3c - stage 2	75	02-07-15 A	20-06-16 A		Excavation of Rock for slope E3c - stage 2				
TPE62400	Excavation of Rock (11,900m3) for slope E3a	90	22-04-15 A	20-06-16 A		Excavation of Rock (11,900m3) for slope E3a				
TPE62230	Excavation of Rock for slope E3c - stage 3	75	21-05-16 A	03-09-16	197	Excavation of Rock for slope E3c - stage 3				
TPE62410	Mapping & Dowelling	15	21-05-16 A	29-11-16	197	Mapping & Dowelling				
TPE62420	U-channel (220m) and Berm for slope E3a	40	21-10-15 A	22-12-16	197	U-channel (220m) and Berm for slope E3a				
Site Formation - Slope Upgrading Works		379	30-10-15 A	01-08-17	213	Site Formation - Slope Upgrading Works				
Stage 3 (Other Slope Features)		379	30-10-15 A	01-08-17	213					
Slope Feature - SSE-D/C170		42	21-02-16 A	07-11-16	171					
SFW10050	Site Clearance and Tree Felling	14	21-05-16 A	20-06-16 A		Site Clearance and Tree Felling				
SFW10040	Implementation of TTA	11	21-05-16 A	05-10-16	147	Implementation of TTA				
SFW10060	Prepare Access Road	7	21-05-16 A	11-10-16	145	Prepare Access Road				
SFW10070	Excavation of Soil (1,240m3) and Modification Works	14	21-02-16 A	07-11-16	136	Excavation of Soil (1,240m3) and Modification Works				
Slope Feature - SSE-D/C150		63	01-12-15 A	11-11-16	343					
SFW10180	Complete slope E3b - stage 4	0		18-08-16	343	◆ Complete slope E3b - stage 4				
SFW10190	Slope Modification	5	17-02-16 A	09-11-16	343	Slope Modification				
SFW10210	Hydroseeding and Erosion Control Mat	5	01-12-15 A	11-11-16	343	Hydroseeding and Erosion Control Mat				
Slope Feature - SSE-D/C152		5	30-10-15 A	13-12-16	343					
SFW10250	Hydroseeding and Erosion Control Mat	5	30-10-15 A	13-12-16	343	Hydroseeding and Erosion Control Mat				
Slope Feature - SSE-D/C121		0	20-06-16	20-06-16	122					
SFW10260	Complete slope D6a and D6b	0		20-06-16	122	◆ Complete slope D6a and D6b				
Slope Feature - SSE-D/C122		0	20-06-16	20-06-16	482					
SFW10300	Complete slope D6a and D6b	0		20-06-16	482	◆ Complete slope D6a and D6b				
Slope Feature - SSE-D/C14		4	20-06-16	23-06-16	228					
AK10410	Possession of Portion X	0	20-06-16		232	◆ Possession of Portion X				
SFW10340	Complete TP_F Backfilling(Bay1-2)	0		23-06-16	228	◆ Complete TP_F Backfilling(Bay1-2)				

█ Remaining Level of Effort █ Critical Remaining Work
█ Actual Work ◆ Milestone
█ Remaining Work ▶ Summary

**CRBC - Kaden JV
Two-Month Rolling Programme**

Date	Revision	Checked	Approved
24-06-16			

Activity ID	Activity Name	Original Duration	Start	Finish	Total Float	2016				
						May	Jun	Jul	Aug	Sep
Slope Feature - 5SE-D/C21		0	20-06-16	20-06-16	103			▼ Slope Feature - 5SE-D/C21		
SFW10540	Completion of Sewer Culvert 1	0		20-06-16	103			◆ Completion of Sewer Culvert 1		
Slope Feature - 5SE-D/C171		5	21-04-16 A	01-08-17	103					
SFW10590	Slope Modification	5	21-04-16 A	01-08-17	103					
Slope Feature - 5SE-D/C16		0	20-06-16	20-06-16	177			▼ Slope Feature - 5SE-D/C16		
SFW10620	Complete pier construction at Bridge H1e & G2a	0		20-06-16	177			◆ Complete pier construction at Bridge H1e & G2a		
Slope Feature - 5SE-D/C17		0	25-06-16	25-06-16	336			▼ Slope Feature - 5SE-D/C17		
SFW10740	Complete of TP_F and TD1 Precast beam installation	0		25-06-16	336			◆ Complete of TP_F and TD1 Precast beam installation		
Natural Terrain Hazard Mitigation Measures		80	27-11-14 A	27-12-14 A						
Natural Terrain Hazard Mitigation Measures		80	27-11-14 A	27-12-14 A						
Boulders within Blasting Zone		80	27-11-14 A	27-12-14 A						
NTH10070	Mitigation measures for 20 boulders within blasting zone	80	27-11-14 A	27-12-14 A						
Vehicular Underpass TN-01		235	30-03-15 A	04-10-16	258					
Stage 3		235	30-03-15 A	04-10-16	258					
Blasting Related Submission		48	30-03-15 A	24-04-15 A						
Blasting Permit Application		48	30-03-15 A	24-04-15 A						
UDP30070	Prepare and Submission of Revised CBAR	48	30-03-15 A	24-04-15 A						
Underpass Excavation from East Portal		89	30-10-15 A	18-02-16 A						
Preparation Works		15	30-10-15 A	30-10-15 A						
UDP30170	Site Set Up	15	30-10-15 A	30-10-15 A						
Drill and Blast CH489-CH312		88	23-11-15 A	18-02-16 A						
UDP30260	CH439-CH399 Drill and Blast method (2.5m penetration length/2.0days)	32	23-11-15 A	14-12-15 A						
UDP30270	CH399-CH390 Drill and Blast method (3.0m penetration length/2.0days)	6	16-12-15 A	19-12-15 A						
UDP30280	CH390-CH317 Drill and Blast method (3.0m penetration length/2.0days)	50	21-12-15 A	18-02-16 A						
Lining Works and Road Works		174	03-04-16 A	04-10-16	200					
Water Proofing and Lining Works		174	03-04-16 A	04-10-16	200					
UDP4090	Erection of Waterproofing Platform(West Portal)	28	03-05-16 A	11-05-16 A						
Type A		96	03-04-16 A	04-10-16	214					
Water Proofing and Kicker		63	03-04-16 A	09-08-16	109					
CH 310-CH327		24	03-04-16 A	14-07-16	109					
UDP4100	Bench Waterproofing works(CH310-CH327.6)(Type A)	10	03-04-16 A	06-07-16	109					
UDP4110	Kicker pouring(CH310-CH327.6)(Type A)	14	18-04-16 A	14-07-16	109					
CH 450-CH503		39	24-04-16 A	09-08-16	109					
UDP4140	Bench Waterproofing works(CH450-CH503)(Type A)	18	24-04-16 A	25-07-16	109					
UDP4150	Kicker pouring(CH450-CH503)(Type A)	21	05-05-16 A	09-08-16	109					
Lining		62	14-07-16	04-10-16	214					
CH 310-CH327		35	14-07-16	27-08-16	241					
UDP4160	Pouring Type A Lining CH312-CH327	7	14-07-16	23-07-16	109					
UDP4170	Erection of rebar fixing platform for west bulkhead wall	7	23-07-16	02-08-16	241					
UDP4190	Rebar fixing platform for west bulkhead wall	7	02-08-16	10-08-16	241					
UDP4230	Formwork for west bulkhead wall	14	10-08-16	27-08-16	241					
CH 450-CH503		55	23-07-16	04-10-16	109					
UDP4180	Pouring Type A Lining CH450-CH468	10	23-07-16	05-08-16	109					
UDP4210	Pouring Type A Lining CH468-CH486	10	05-08-16	18-08-16	109					
UDP4220	Pouring Type A Lining CH486-CH534.9	35	18-08-16	04-10-16	109					
Type B		44	25-04-16 A	20-06-16 A						
Lining B		44	25-04-16 A	20-06-16 A						
UDP4040	Pour Type B Lining CH409-440	14	25-04-16 A	10-05-16 A						
UDP4020	Pour Type B Lining CH373-409	14	10-05-16 A	31-05-16 A						
UDP4010	Pour Type B Lining CH337-373	14	31-05-16 A	20-06-16 A						
Type C		70	02-07-16	28-09-16	160					
UDP4130	Base slab waterproofing and re-bar fixing(Type C) CH503-CH534.9	70	02-07-16	28-09-16	160					
Road and Drainage Work ,Utilities Works at for Lung Fu Road Roundabout		160	12-12-14 A	08-09-16	31					
Section 3		160	12-12-14 A	08-09-16	31					
Utilites installation ,road and drainage works (TTA stage 0)		42	12-12-14 A	23-01-15 A						
LFR10020	Drainage & Sewerage works	42	12-12-14 A	23-01-15 A						
Utilites installation ,road and drainage works (TTA stage 0-1)		155	25-01-16 A	08-09-16	31					
LFR10070	PCCW	15	07-04-16 A	28-06-16	-4					
LFR10080	Hutchison Global Communication Cable	15	07-04-16 A	02-07-16	-4					

█ Remaining Level of Effort █ Critical Remaining Work
█ Actual Work ◆ Milestone
█ Remaining Work ⇨ Summary

CRBC - Kaden JV
Two-Month Rolling Programme

Date	Revision	Checked	Approved
24-06-16			

Activity ID	Activity Name	Original Duration	Start	Finish	Total Float	2016
						May Jun Jul Aug Sep
LFR10090	Hong Kong Boaroband Network	15	20-05-16 A	06-07-16	-4	
LFR10100	Wharf T&T Duct and Joint Box	15	20-05-16 A	08-07-16	-4	
LFR10110	New World Telecom	15	20-05-16 A	12-07-16	-4	
LFR10120	Town Gas	15	20-05-16 A	16-07-16	-4	
LFR10060	DN100,300,700	21	25-01-16 A	19-07-16	67	
LFR10130	Smartone Cable	15	20-05-16 A	23-07-16	-4	
LFR10050	Drainage works	40	25-01-16 A	25-07-16	67	
LFR10140	HKC Cable	15	20-05-16 A	03-08-16	-4	
LFR10150	Pubic Lighting	15	20-06-16 A	13-08-16	-4	
LFR10160	CLP + CRD	15	09-08-16	26-08-16	-4	
LFR10170	Trax Comm	15	22-08-16	08-09-16	-4	
Utilites installation ,road and drainage works for East Portal		88	20-06-16	12-10-16	277	
EPA1000	Rock Cutting	88	20-06-16	12-10-16	277	
Sewage, Irrigation and Road& Drainage Works		140	04-01-16 A	15-01-18	248	
SAI10060	Sewage, irrigation and road&drainage works -G2-north side	70	04-01-16 A	21-11-17	248	
SAI10070	Sewage, irrigation and road&drainage works- G2-south side	70	14-01-16 A	15-01-18	248	


Remaining Level of Effort Critical Remaining Work
 Actual Work Milestone
 Remaining Work Summary

CRBC - Kaden JV
Two-Month Rolling Programme

Date	Revision	Checked	Approved
24-06-16			

Appendix E

Monitoring Locations / Sensitive Receivers for the Contract

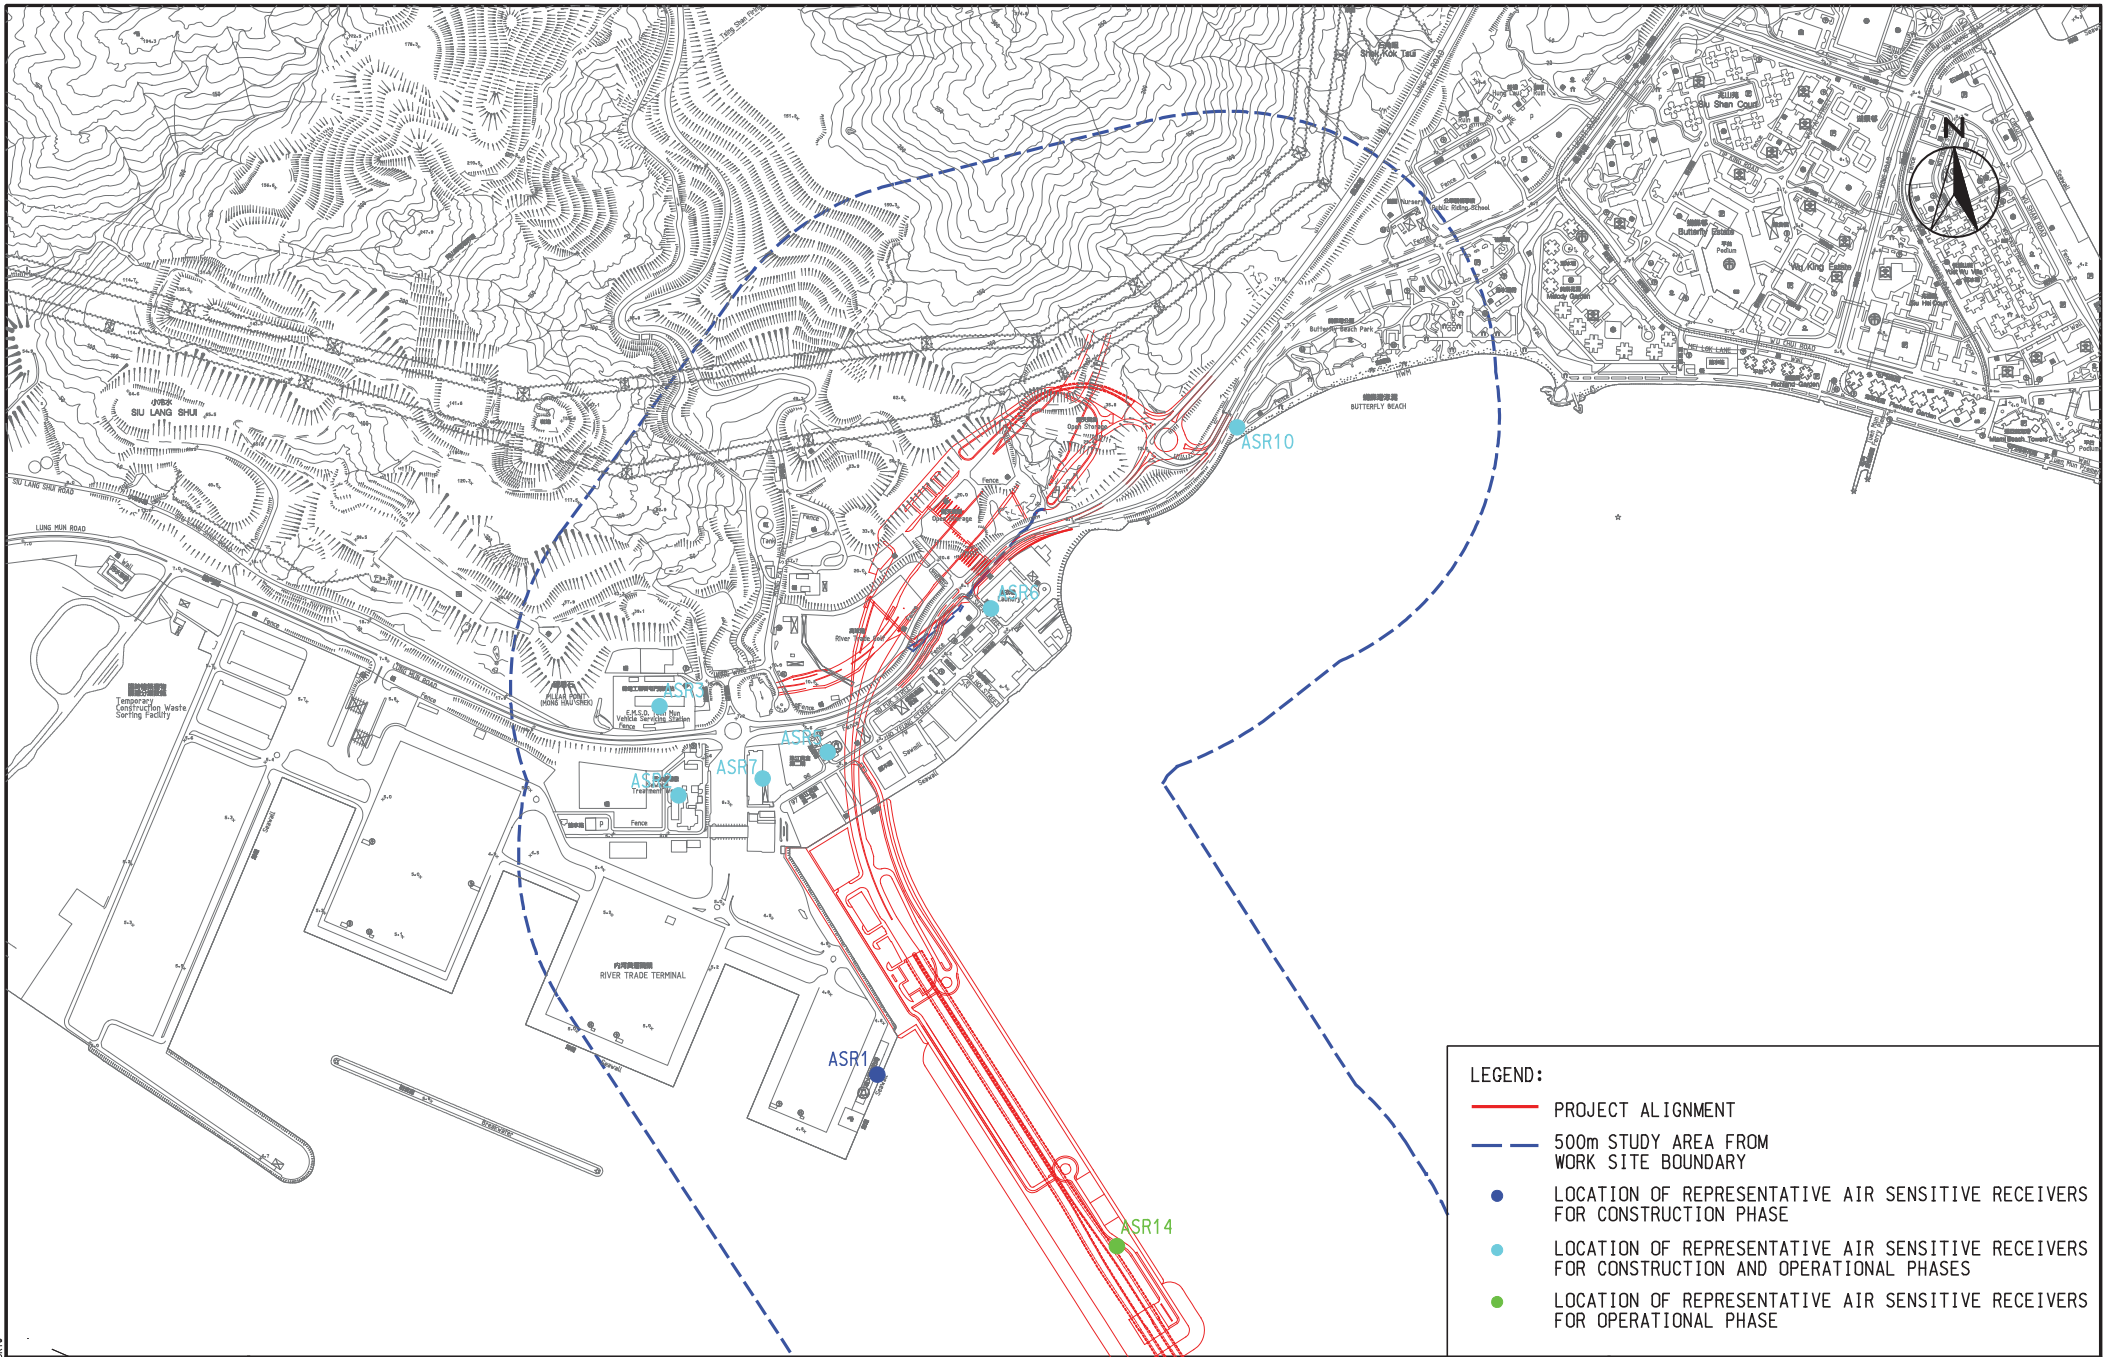


LEGEND:

- PROJECT ALIGNMENT
- - - 500m STUDY AREA FROM WORK SITE BOUNDARY
- LOCATION OF REPRESENTATIVE AIR SENSITIVE RECEIVERS FOR CONSTRUCTION PHASE
- LOCATION OF REPRESENTATIVE AIR SENSITIVE RECEIVERS FOR CONSTRUCTION AND OPERATIONAL PHASES
- LOCATION OF REPRESENTATIVE AIR SENSITIVE RECEIVERS FOR OPERATIONAL PHASE


AGREEMENT NO. CE 52/2007(HY)
 TUEN MUN - CHEK LAP KOK LINK - INVESTIGATION
REPRESENTATIVE AIR SENSITIVE RECEIVERS

SCALE	1 : 10 000	DATE	
-------	------------	------	--

Planning 8/17/2009
 PLOT SCALE: 1:25000

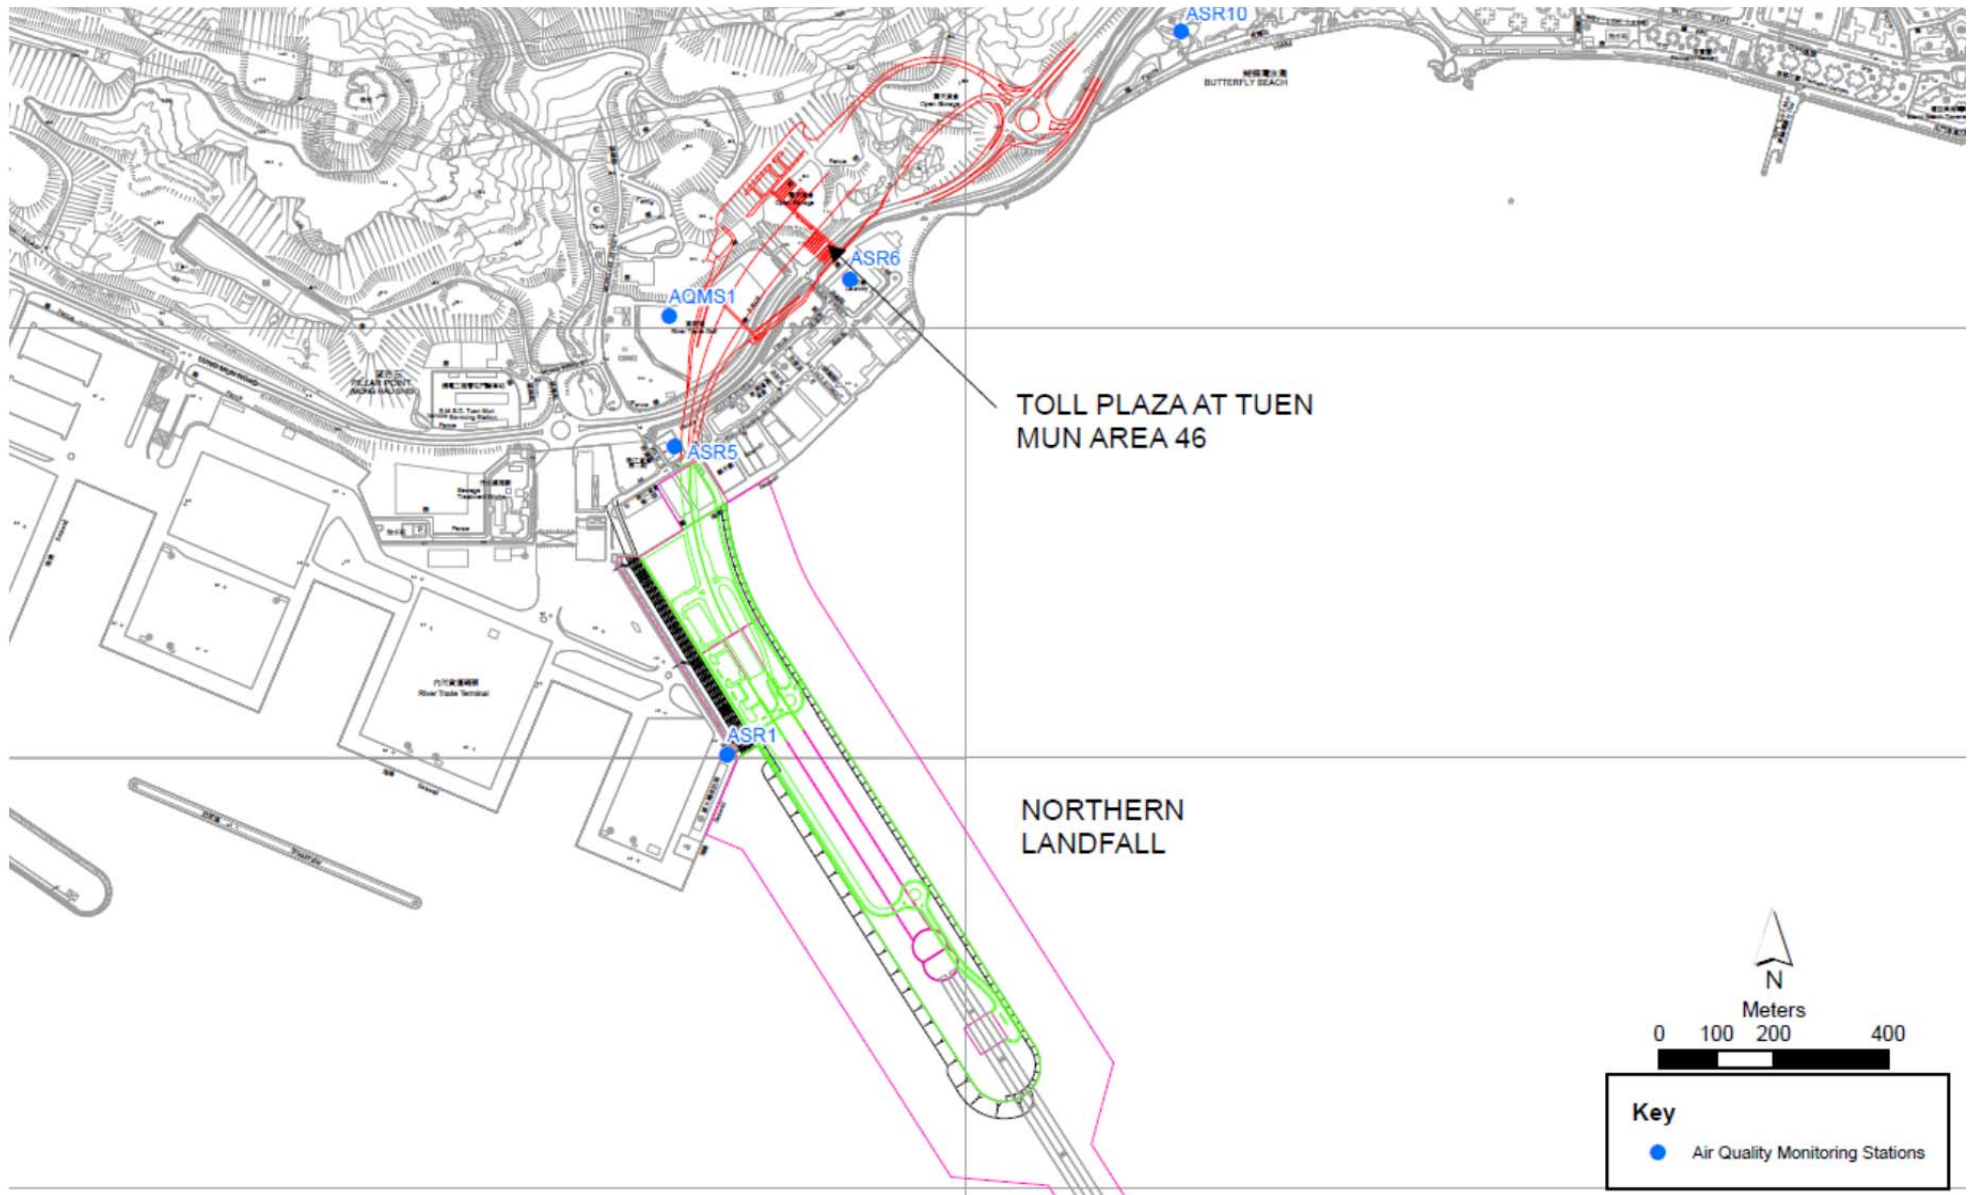

Air Quality Monitoring Location

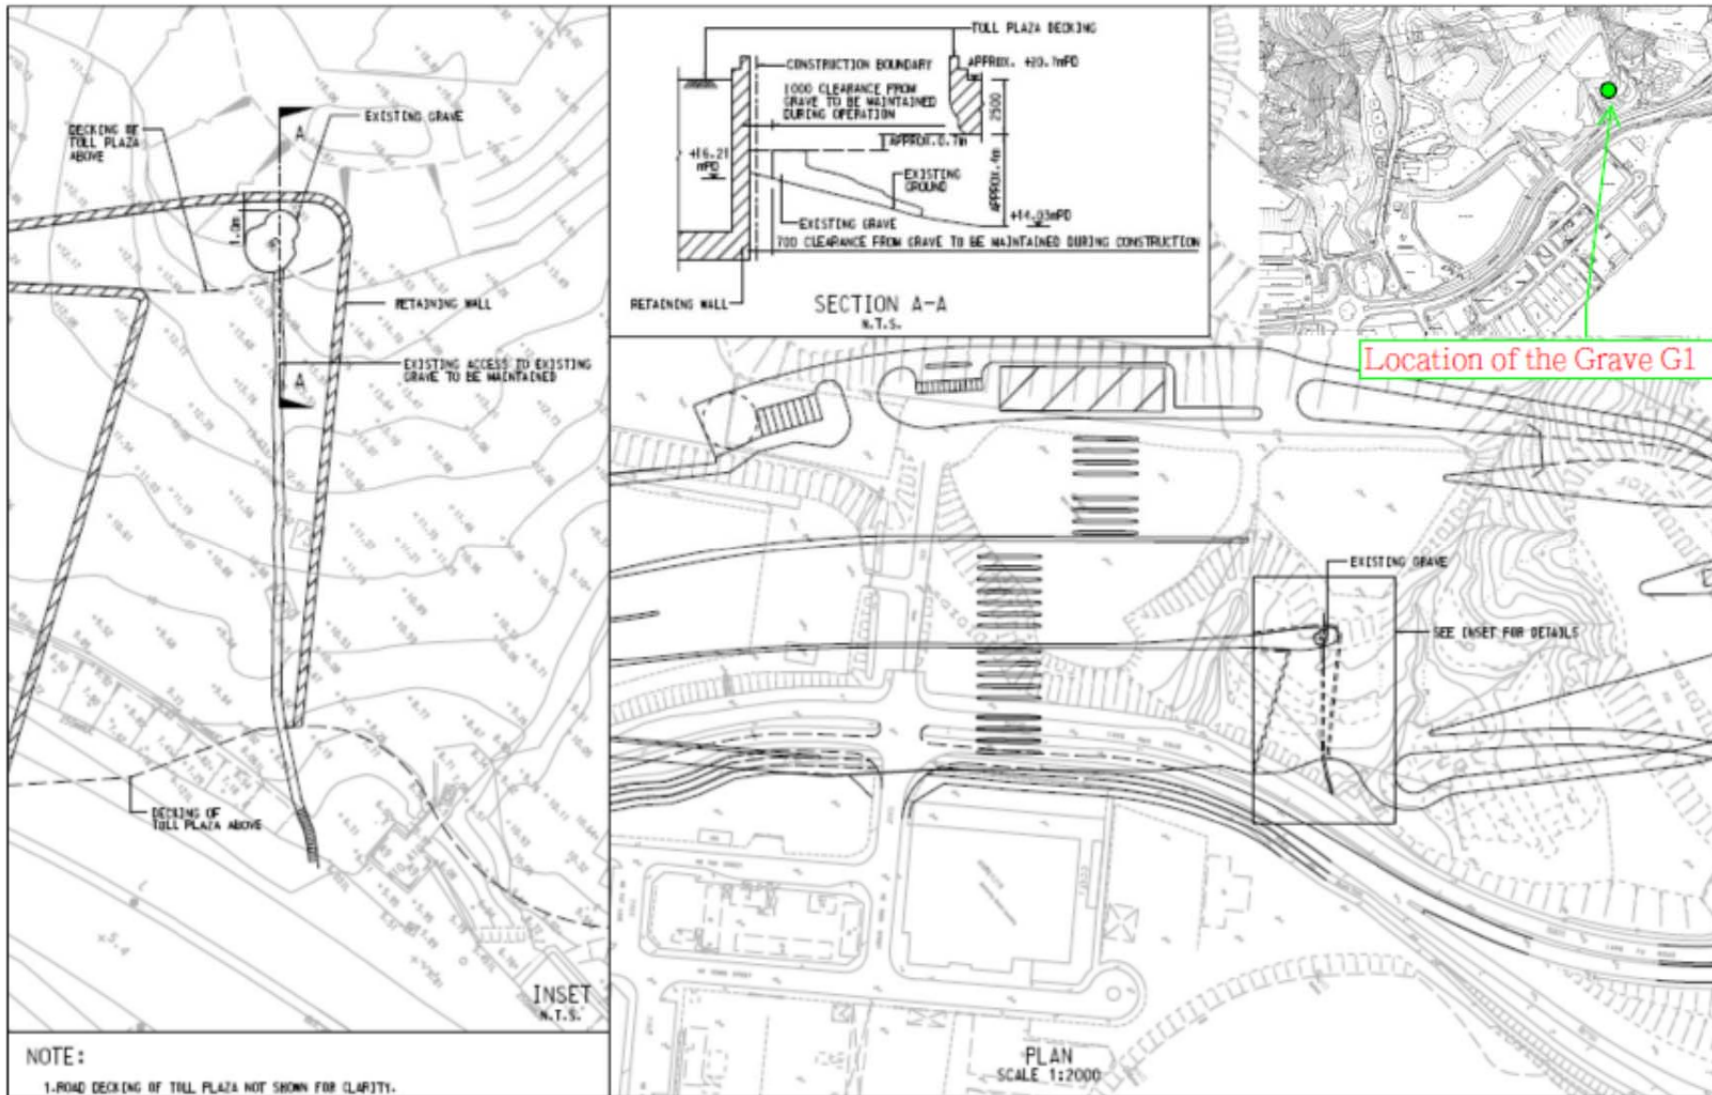




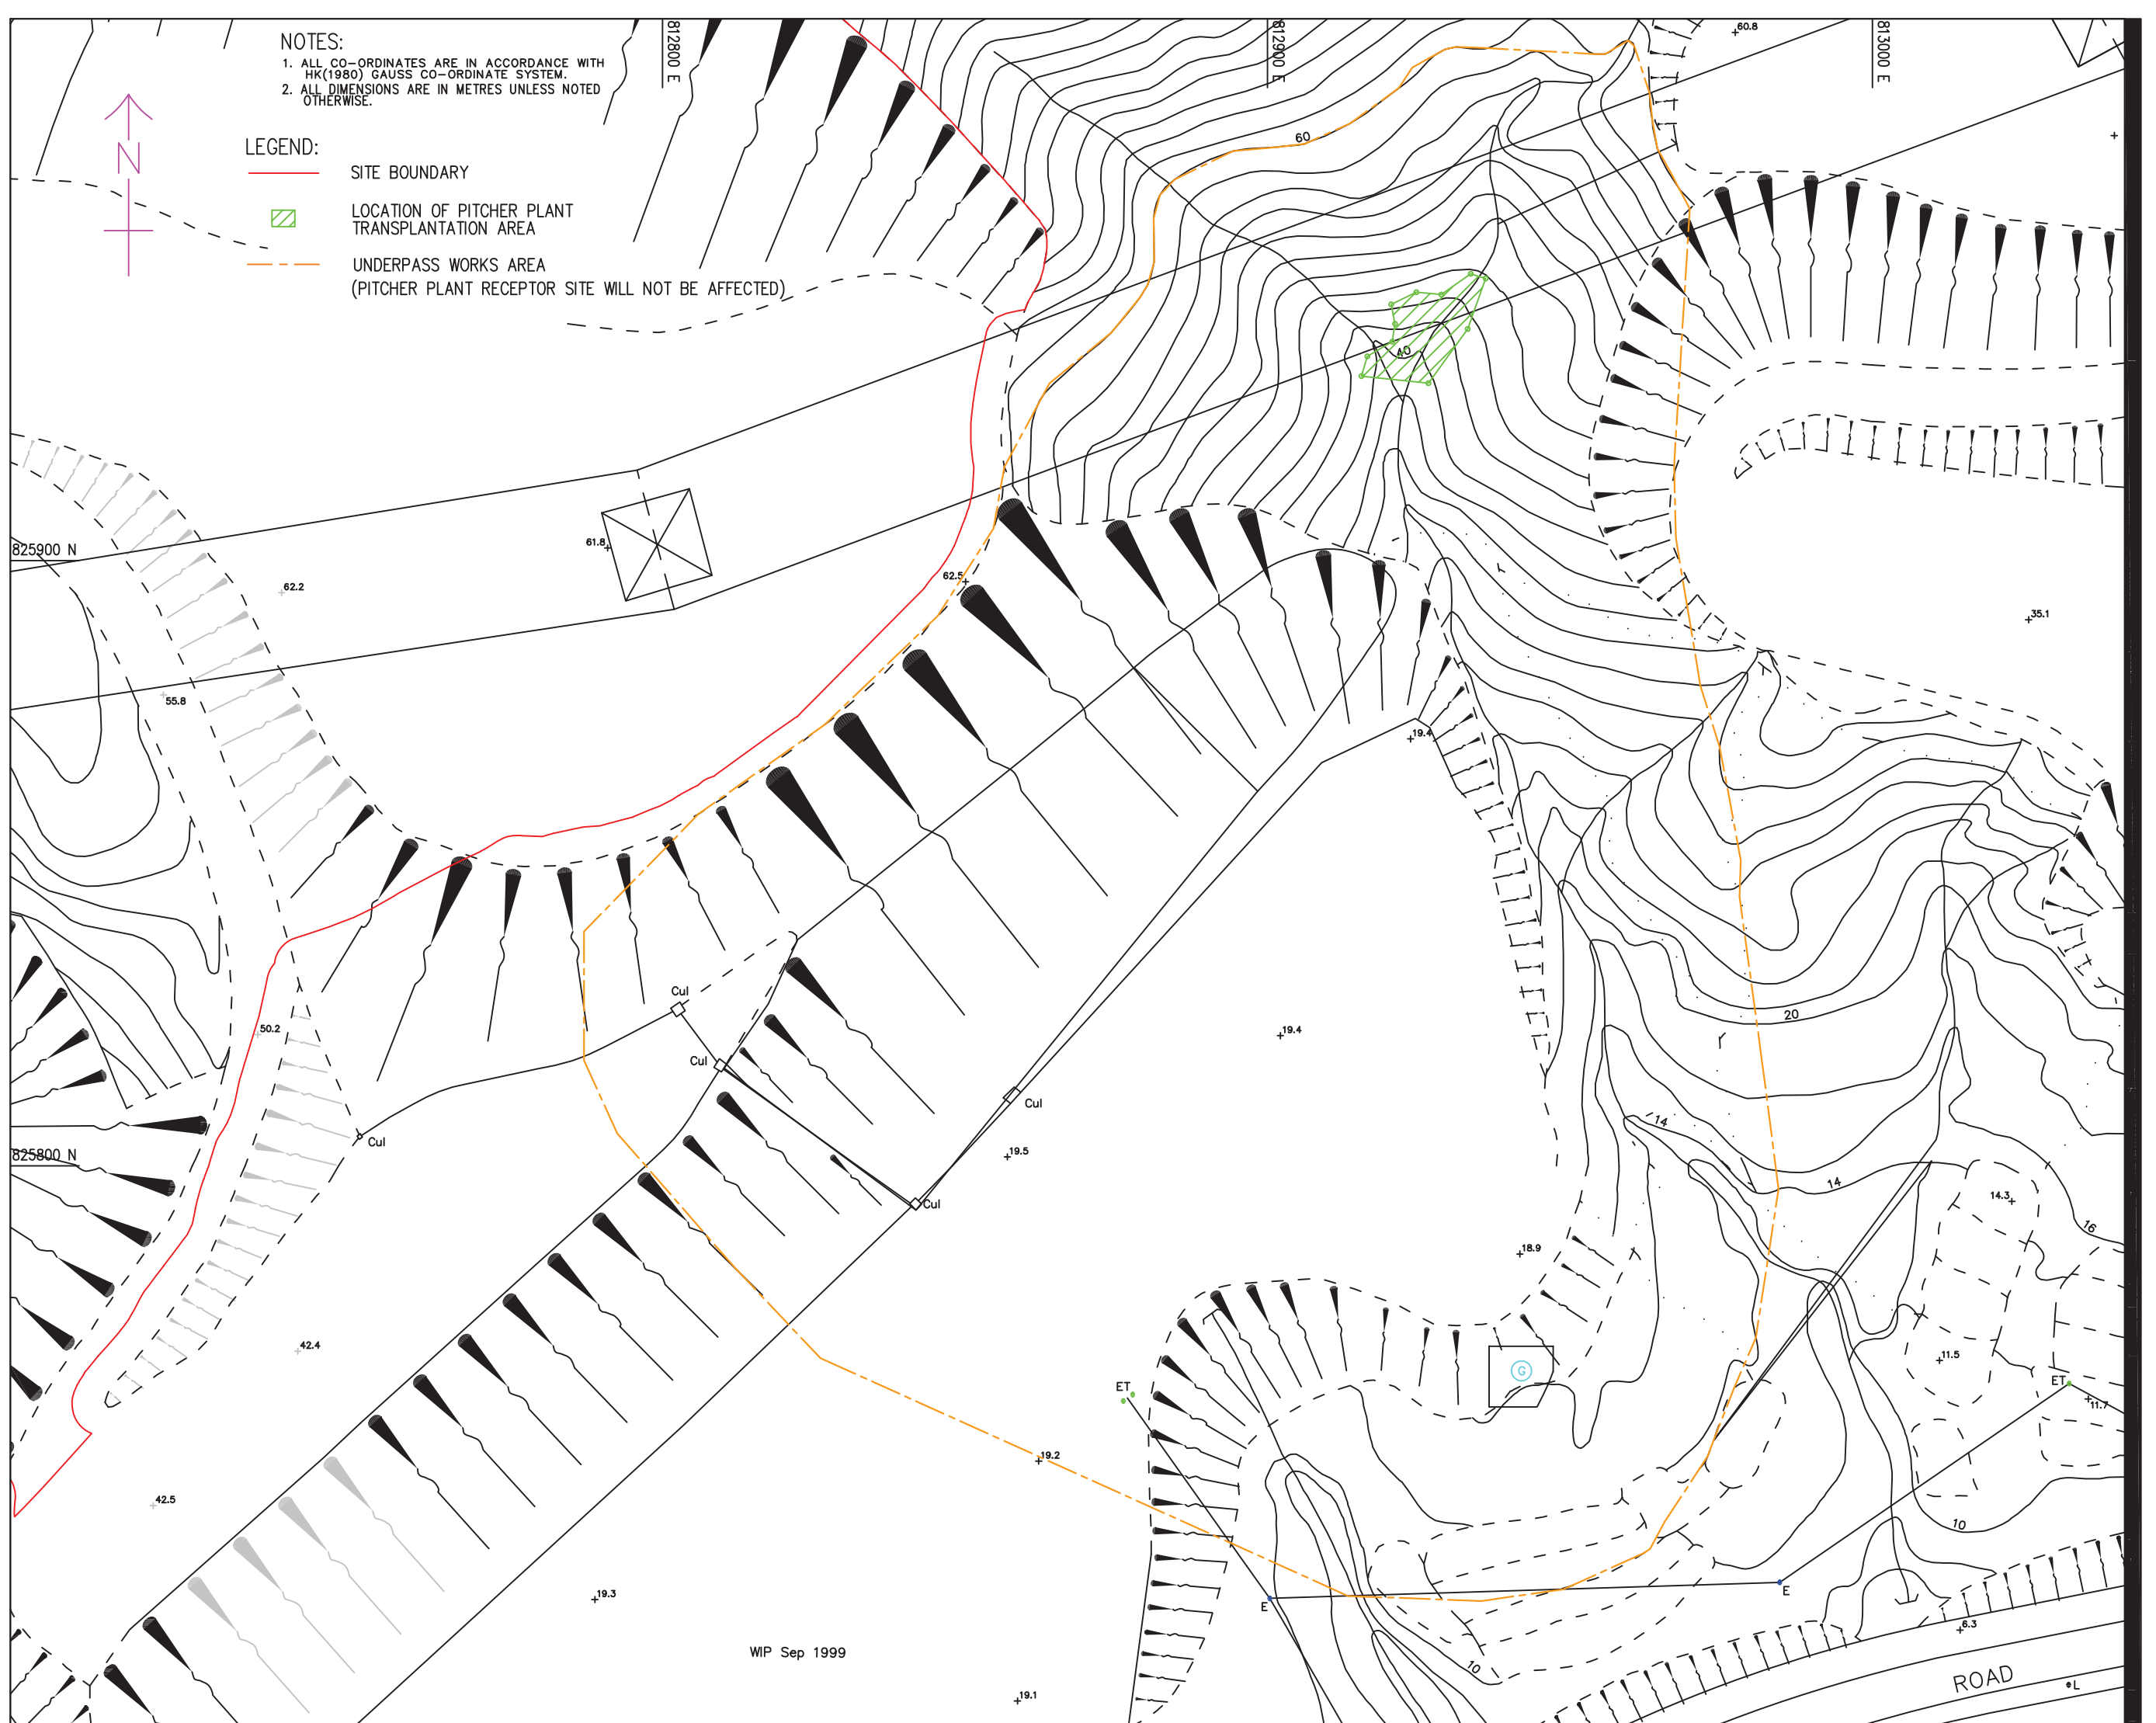
Location of the Grave G1

NOTES:

1. ALL CO-ORDINATES ARE IN ACCORDANCE WITH HK(1980) GAUSS CO-ORDINATE SYSTEM.
2. ALL DIMENSIONS ARE IN METRES UNLESS NOTED OTHERWISE.

LEGEND:


-  SITE BOUNDARY
-  LOCATION OF PITCHER PLANT TRANSPLANTATION AREA
-  UNDERPASS WORKS AREA (PITCHER PLANT RECEPTOR SITE WILL NOT BE AFFECTED)



WIP Sep 1999

ROAD

Location of the Retaining Wall B

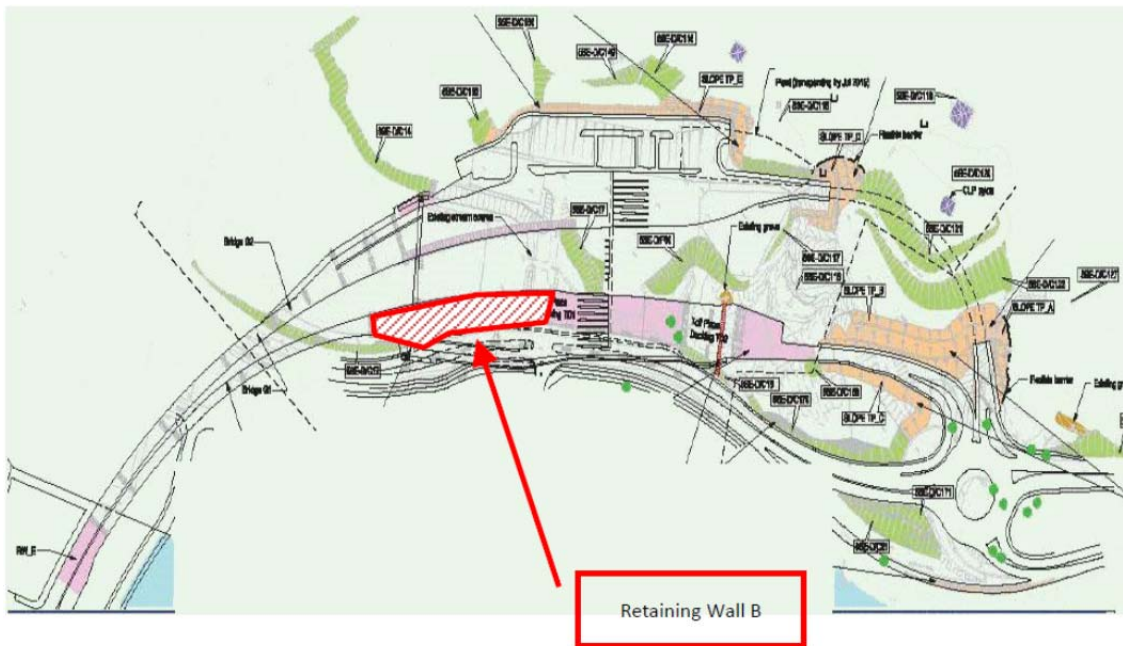

Appendix F

Event and Action Plan

Event and Action Plan for Air Quality

EVENT	ACTION			
	ET ⁽¹⁾	IEC ⁽¹⁾	SOR ⁽¹⁾	Contractor(s)
Action Level				
Exceedance recorded	<ol style="list-style-type: none"> 1 Identify the source. 2 Repeat measurements to confirm findings. If two consecutive measurements exceed Action Level, the exceedance is then confirmed. 3 Inform the IEC and the SOR 4 Investigate the cause of exceedance and check Contractor's working procedures to determine possible mitigation to be implemented. 5 If the exceedance is confirmed to be Project related after investigation, increase monitoring frequency to daily. 6 Discuss with the IEC and the Contractor on remedial actions required. 7 If exceedance continues, arrange meeting with the IEC and the SOR. 8 If exceedance stops, cease additional monitoring. 	<ol style="list-style-type: none"> 1 Check monitoring data submitted by the ET. 2 Check the Contractor's working method. 3 If the exceedance is confirmed to be Project related after investigation, discuss with the ET and the Contractor on possible remedial measures. 4 Advise the SOR on the effectiveness of the proposed remedial measures. 5 Supervisor implementation of remedial measures. 	<ol style="list-style-type: none"> 1 Confirm receipt of notification of failure in writing. 2 Notify the Contractor. 3 Ensure remedial measures properly implemented. 	<ol style="list-style-type: none"> 1 Rectify any unacceptable practice. 2 Amend working methods if appropriate 3 If the exceedance is confirmed to be Project related, submit proposals for remedial actions to IEC within 3 working days of notification 4 Implement the agreed proposals 5 Amend proposal if appropriate.
Limit Level				
Exceedance recorded	<ol style="list-style-type: none"> 1. Identify the source. 2. Repeat measurement to confirm finding. If two consecutive measurements exceed Limit Level, the exceedance is then confirmed. 3. Inform the IEC, the SOR, the DEP and the Contractor. 4. Investigate the cause of exceedance and check Contractor's working procedures to determine possible mitigation to be implemented. 5. If the exceedance is confirmed to be Project related after investigation, increase monitoring frequency to daily. 6. Carry out analysis of the Contractor's working procedures to determine possible mitigation to be implemented. 7. Arrange meeting with the IEC and the SOR to discuss the remedial actions to be taken. 8. Assess effectiveness of the Contractor's remedial actions and keep the IEC, the DEP and the SOR informed of the results. 9. If exceedance stops, cease additional monitoring. 	<ol style="list-style-type: none"> 1 Check monitoring data submitted by the ET. 2 Check Contractor's working method. 3 If the exceedance is confirmed to be Project related after investigation, discuss with the ET and the Contractor on possible remedial measures. 4 Advise the SOR on the effectiveness of the proposed remedial measures. 5 Supervisor implementation of remedial measures. 	<ol style="list-style-type: none"> 1. Confirm receipt of notification of failure in writing. 2. Notify the Contractor. 3. If the exceedance is confirmed to be Project related after investigation, in consultation with the IEC, agree with the Contractor on the remedial measures to be implemented. 4. Ensure remedial measures are properly implemented. 5. If exceedance continues, consider what activity of the work is responsible and instruct the Contractor to stop that activity of work until the exceedance is abated. 	<ol style="list-style-type: none"> 1 Take immediate action to avoid further exceedance. 2 If the exceedance is confirmed to be Project related after investigation, submit proposals for remedial actions to IEC within 3 working days of notification. 3 Implement the agreed proposals. 4 Amend proposal if appropriate. 5 Stop the relevant activity of works as determined by the SOR until the exceedance is abated.

Event and Action Plan for Landscape and Visual Impact

EVENT ACTION LEVEL	ACTION			
	ET	IEC	ER	Contractor
Design Check	<ul style="list-style-type: none"> • Check final design conforms to the requirements of EP and prepare report. 	<ul style="list-style-type: none"> • Check report. • Recommend remedial design if necessary 	<ul style="list-style-type: none"> • Undertake remedial design if necessary 	
Non- conformity on one occasion	<ul style="list-style-type: none"> • Identify Source • Inform IEC and ER • Discuss remedial actions with IEC, ER and Contractor • Monitor remedial actions until rectification has been completed 	<ul style="list-style-type: none"> • Check report • Check Contractor's working method • Discuss with ET and Contractor on possible remedial measures • Advise ER on effectiveness of proposed remedial measures. • Check implementation of remedial measures 	<ul style="list-style-type: none"> • Notify Contractor • Ensure remedial measures are properly implemented 	<ul style="list-style-type: none"> • Amend working methods • Rectify damage and undertake any necessary replacement
Repeated Non-conformity	<ul style="list-style-type: none"> • Identify Source • Inform IEC and ER • Increase monitoring frequency • Discuss remedial actions with IEC, ER and Contractor • Monitor remedial actions until rectification has been completed • If nonconformity stops, cease additional monitoring 	<ul style="list-style-type: none"> • Check monitoring report • Check Contractor's working method • Discuss with ET and Contractor on possible remedial measures • Advise ER on effectiveness of proposed remedial measures • Supervise implementation of remedial measures 	<ul style="list-style-type: none"> • Notify Contractor • Ensure remedial measures are properly implemented 	<ul style="list-style-type: none"> • Amend working methods • Rectify damage and undertake any necessary replacement

Event / Action Plan for Cultural Heritage

Action Level	ET	IC (E)	ER	Contractor
Non- conformity on one occasion	<ol style="list-style-type: none"> 1. Identify Source 2. Inform the IEC and the ER 3. Discuss remedial actions with the IEC, the ER and the Contractor 4. Monitor remedial actions until rectification has been completed 	<ol style="list-style-type: none"> 1. Check report 2. Check the Contractor's working method 3. Discuss with the ET and the Contractor on possible remedial measures 4. Advise the ER on effectiveness of proposed remedial measures. 5. Check implementation of remedial measures. 	<ol style="list-style-type: none"> 1. Notify Contractor 2. Ensure remedial measures are properly implemented 	<ol style="list-style-type: none"> 1. Amend working methods 2. Rectify damage and undertake any necessary replacement
Repeated Non-conformity	<ol style="list-style-type: none"> 1. Identify Source 2. Inform the IC(E) and the ER 3. Increase monitoring frequency 4. Discuss remedial actions with the IC(E), the ER and the Contractor 5. Monitor remedial actions until 6. rectification has been completed 7. If exceedance stops, cease additional monitoring 	<ol style="list-style-type: none"> 1. Check monitoring report 2. Check the Contractor's working method 3. Discuss with the ES and the Contractor on possible remedial measures 4. Advise the ER on effectiveness of proposed remedial measures 5. Supervise implementation of remedial measures. 	<ol style="list-style-type: none"> 1. Notify the Contractor 2. Ensure remedial measures are properly implemented 	<ol style="list-style-type: none"> 1. Amend working methods 2. Rectify damage and undertake any necessary replacement

Note:

ET – Environmental Specialist, IEC – Independent Environmental Checker, ER – Engineer’s Representative

Event / Action Plan for General Ecology

Action Level	ET	IEC	ER	Contractor
Non-conformity on one occasion	<ul style="list-style-type: none"> Identify Source Inform the IEC and the ER Discuss remedial actions with the IEC, the ER and the Contractor Monitor remedial actions until rectification has been completed 	<ul style="list-style-type: none"> Check report Check the Contractor's working method Discuss with the ET and the Contractor on possible remedial measures Advise the ER on effectiveness of proposed remedial measures. Check implementation of remedial measures. 	<ul style="list-style-type: none"> Notify Contractor Ensure remedial measures are properly implemented Consider and instruct, if necessary, the Contractor to slow down or to stop all or part of the works in the case of a serious nonconformity until situation rectified. 	<ul style="list-style-type: none"> Amend working methods Rectify damage and undertake any necessary replacement
Repeated Non conformity	<ul style="list-style-type: none"> Identify Source Inform the IC(E) and the ER Increase monitoring frequency Discuss remedial actions with the IC(E), the ER and the Contractor Monitor remedial actions until rectification has been completed If exceedance stops, cease additional monitoring 	<ul style="list-style-type: none"> Check monitoring report Check the Contractor's working method Discuss with the ES and the Contractor on possible remedial measures Advise the ER on effectiveness of proposed remedial measures Supervise implementation of remedial measures 	<ul style="list-style-type: none"> Notify the Contractor Ensure remedial measures are properly implemented Consider and instruct, if necessary, the Contractor to slow down or to stop all or part of the works in the case of a serious nonconformity until situation rectified. 	<ul style="list-style-type: none"> Amend working methods Rectify damage and undertake any necessary replacement

Note:

ET – Environmental Specialist, IC(E) – Independent Checker (Environmental), ER – Engineer's Representative

Actions in the Event of Landfill Gas being Detected in Excavation / Confined Area

Parameter	Measurement	Action
Oxygen	< 19%	- Ventilate to restore oxygen to > 19%
	< 18%	- Stop work - Evacuate personnel / prohibit entry - Increase ventilation to restore to > 19%
Methane	> 10% LEL (> 0.5% v/v)	- Prohibit hot work - Ventilate to restore methane to < 10% LEL
	> 20% LEL (>1% v/v)	- Stop work - Evacuate personnel / prohibit entry - Increase ventilation to restore to < 10%
Carbon Dioxide	> 0.5%	- Ventilate to restore oxygen to < 0.5%
	> 1.5%	- Stop work - Evacuate personnel / prohibit entry - Increase ventilation to restore to < 0.5%

Appendix G

Monitoring Schedule

Impact Monitoring Schedule for June 2016

Date		Landfill Gas Monitoring	Landscape and Visual Monitoring
Wed	1-June-16	✓	
Thu	2-June-16	✓	
Fri	3-June-16	✓	✓
Sat	4-June-16	✓	
Sun	5-June-16		
Mon	6-June-16	✓	
Tue	7-June-16	✓	
Wed	8-June-16	✓	
Thu	9-June-16		
Fri	10-June-16	✓	✓
Sat	11-June-16	✓	
Sun	12-June-16		
Mon	13-June-16	✓	
Tue	14-June-16	✓	
Wed	15-June-16	✓	
Thu	16-June-16	✓	
Fri	17-June-16	✓	✓
Sat	18-June-16	✓	
Sun	19-June-16		
Mon	20-June-16	✓	
Tue	21-June-16	✓	
Wed	22-June-16	✓	
Thu	23-June-16	✓	
Fri	24-June-16	✓	✓
Sat	25-June-16	✓	
Sun	26-June-16		
Mon	27-June-16	✓	
Tue	28-June-16	✓	
Wed	29-June-16	✓	
Thu	30-June-16	✓	

✓	Monitoring Day
	Sunday or Public Holiday

Impact Monitoring Schedule for July 2016

Date		Landfill Gas Monitoring	Landscape and Visual Monitoring
Fri	1-July-16		
Sat	2-July-16	✓	✓
Sun	3-July-16		
Mon	4-July-16	✓	
Tue	5-July-16	✓	
Wed	6-July-16	✓	
Thu	7-July-16	✓	
Fri	8-July-16	✓	✓
Sat	9-July-16	✓	
Sun	10-July-16		
Mon	11-July-16	✓	
Tue	12-July-16	✓	
Wed	13-July-16	✓	
Thu	14-July-16	✓	
Fri	15-July-16	✓	✓
Sat	16-July-16	✓	
Sun	17-July-16		
Mon	18-July-16	✓	
Tue	19-July-16	✓	
Wed	20-July-16	✓	
Thu	21-July-16	✓	
Fri	22-July-16	✓	✓
Sat	23-July-16	✓	
Sun	24-July-16		
Mon	25-July-16	✓	
Tue	26-July-16	✓	
Wed	27-July-16	✓	
Thu	28-July-16	✓	
Fri	29-July-16	✓	✓
Sat	30-July-16	✓	
Sun	31-July-16		

✓	Monitoring Day
	Sunday or Public Holiday

Appendix H

Calibration Certificates of Monitoring Equipment

CERTIFICATION OF CALIBRATION



ISSUED BY: GEOTECH LABORATORY

Date Of Calibration: 14-Sep-2015

Certificate Number: G503226_2/15055



No. 4533

Page 1 of 2 Pages

Approved by Signatory

Dawn Hemings

Laboratory Inspection

GEOTECHNICAL INSTRUMENTS (UK) LTD

Sovereign House, Queensway, Leamington Spa, Warwickshire, CV31 3JR United Kingdom

Tel: +44 (0) 1926 338111 Fax: +44 (0) 1926 338110

E-mail: service@geotech.co.uk

www.geotechuk.com

Customer: Fugro Geotechnical Services Ltd

Units 6, 8-11
10/F Worldwide Industrial Centre
43-47 Shan Mei Street
Fo Tan
Sha Tin, N.T.
HONG KONG

Description: BIOGAS 5000

Model: BIOGAS 5000

Serial Number: G503226

UKAS Accredited results:

Methane (CH ₄)		
Certified Gas (%)	Instrument Reading (%)	Uncertainty (%)
5.0	4.9	0.41
15.0	14.9	0.64
50.1	49.5	0.94

Carbon Dioxide (CO ₂)		
Certified Gas (%)	Instrument Reading (%)	Uncertainty (%)
5.0	4.9	0.43
15.0	14.9	0.70
49.9	50.6	1.1

Oxygen (O ₂)		
Certified Gas (%)	Instrument Reading (%)	Uncertainty (%)
21.0	21.0	0.31

All concentrations are molar.

CH₄, CO₂ readings recorded at : 31.5 °C ± 1.5 °C

O₂ reading recorded at : 22.7 °C ± 1.5 °C

Barometric Pressure : 0987 mbar ± 3 mbar

Method of Test : The analyser is calibrated in a temperature controlled chamber using reference gases.

The reported expanded uncertainty is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%. The uncertainty evaluation has been carried out in accordance with UKAS requirements.

This certificate is issued in accordance with the laboratory accreditation requirements of the United Kingdom Accreditation Service. It provides traceability of measurement to the SI system of units and/or to units of measurement realised at the National Physical Laboratory or other recognised national metrology institutes. This certificate may not be reproduced other than in full, except with the prior written approval of the issuing laboratory.

Appendix I

Landfill Gas Monitoring Results and Graphical Plots

Landfill Gas Monitoring Results (Retaining Wall F)

Monitoring Location	Date	Time	Weather	Temperature (°C)	Methane (%)			Oxygen (%)			Carbon Dioxide (%)		
					Measurement Result	Action Level	Limit Level	Measurement Result	Action Level	Limit Level	Measurement Result	Action Level	Limit Level
Retaining Wall F	1/6/2016	8:00	Fine	27	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	1/6/2016	14:00		33	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	2/6/2016	8:00	Fine	28	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	2/6/2016	14:00		33	0.1	10	20	21.1	19	18	0.2	0.5	1.5
	3/6/2016	8:00	Hazy	29	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	3/6/2016	14:00		32	0.1	10	20	21.1	19	18	0.2	0.5	1.5
	4/6/2016	8:00	Cloudy	24	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	4/6/2016	14:00		33	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	6/6/2016	8:00	Rain	24	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	6/6/2016	14:00		29	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	7/6/2016	8:00	Fine	26	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	7/6/2016	14:00		30	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	8/6/2016	8:00	Rain	24	0.1	10	20	21.1	19	18	0.2	0.5	1.5
	8/6/2016	14:00		30	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	10/6/2016	8:00	Cloudy	26	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	10/6/2016	14:00		31	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	11/6/2016	8:00	Rain	25	0.1	10	20	21.1	19	18	0.2	0.5	1.5
	11/6/2016	14:00		28	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	13/6/2016	8:00	Cloudy	28	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	13/6/2016	14:00		31	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	14/6/2016	8:00	Cloudy	29	0.1	10	20	21.1	19	18	0.2	0.5	1.5
	14/6/2016	14:00		32	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	15/6/2016	8:00	Cloudy	29	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	15/6/2016	14:00		32	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	16/6/2016	8:00	Rain	28	0.1	10	20	21.1	19	18	0.2	0.5	1.5
	16/6/2016	14:00		31	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	17/6/2016	8:00	Rain	26	0.1	10	20	21.1	19	18	0.2	0.5	1.5
	17/6/2016	14:00		32	0.1	10	20	21.1	19	18	0.2	0.5	1.5
	18/6/2016	8:00	Rain	27	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	18/6/2016	14:00		31	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	20/6/2016	8:00	Cloudy	28	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	20/6/2016	14:00		34	0.1	10	20	21.1	19	18	0.2	0.5	1.5
	21/6/2016	8:00	Hazy	28	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	21/6/2016	14:00		33	0.1	10	20	21.1	19	18	0.2	0.5	1.5
	22/6/2016	8:00	Hazy	28	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	22/6/2016	14:00		33	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	23/6/2016	8:00	Fine	28	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	23/6/2016	14:00		34	0.1	10	20	21.1	19	18	0.2	0.5	1.5
	24/6/2016	8:00	Sunny	28	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	24/6/2016	14:00		35	0.1	10	20	21.1	19	18	0.2	0.5	1.5
25/6/2016	8:00	Fine	29	0.1	10	20	21.1	19	18	0.2	0.5	1.5	
25/6/2016	14:00		36	0.1	10	20	21.1	19	18	0.1	0.5	1.5	
27/6/2016	8:00	Cloudy	28	0.1	10	20	21.1	19	18	0.1	0.5	1.5	
27/6/2016	14:00		35	0.1	10	20	21.1	19	18	0.1	0.5	1.5	
28/6/2016	8:00	Rain	26	0.1	10	20	21.1	19	18	0.1	0.5	1.5	
28/6/2016	14:00		32	0.1	10	20	21.1	19	18	0.2	0.5	1.5	
29/6/2016	8:00	Rain	27	0.1	10	20	21.1	19	18	0.1	0.5	1.5	
29/6/2016	14:00		33	0.1	10	20	21.1	19	18	0.2	0.5	1.5	
30/6/2016	8:00	Cloudy	28	0.1	10	20	21.1	19	18	0.1	0.5	1.5	
30/6/2016	14:00		33	0.1	10	20	21.1	19	18	0.2	0.5	1.5	

Remark:




Parameter	Criteria	Measurement
Oxygen	Action Level	< 19%
	Limit Level	< 18%
Methane	Action Level	> 10% LEL (> 0.5% v/v)
	Limit Level	> 20% LEL (>1% v/v)
Carbon Dioxide	Action Level	> 0.5%
	Limit Level	> 1.5%

Landfill Gas Monitoring Results (Retaining Wall B)




Monitoring Location	Date	Time	Weather	Temperature (°C)	Methane (%)			Oxygen (%)			Carbon Dioxide (%)		
					Measurement Result	Action Level	Limit Level	Measurement Result	Action Level	Limit Level	Measurement Result	Action Level	Limit Level
Retaining Wall B	1/6/2016	8:20	Fine	27	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	1/6/2016	14:20		33	0.1	10	20	21.1	19	18	0.2	0.5	1.5
	2/6/2016	8:20	Fine	28	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	2/6/2016	14:20		33	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	3/6/2016	8:20	Hazy	29	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	3/6/2016	14:20		32	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	4/6/2016	8:20	Cloudy	24	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	4/6/2016	14:20		33	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	6/6/2016	8:20	Rain	24	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	6/6/2016	14:20		29	0.1	10	20	21.1	19	18	0.2	0.5	1.5
	7/6/2016	8:20	Fine	26	0	10	20	21.1	19	18	0.2	0.5	1.5
	7/6/2016	14:20		30	0.1	10	20	21	19	18	0.1	0.5	1.5
	8/6/2016	8:20	Rain	24	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	8/6/2016	14:20		30	0.1	10	20	21.1	19	18	0.2	0.5	1.5
	10/6/2016	8:20	Cloudy	26	0.1	10	20	21	19	18	0.1	0.5	1.5
	10/6/2016	14:20		31	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	11/6/2016	8:20	Rain	25	0.1	10	20	21.1	19	18	0.2	0.5	1.5
	11/6/2016	14:20		28	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	13/6/2016	8:20	Cloudy	28	0.1	10	20	21.1	19	18	0.2	0.5	1.5
	13/6/2016	14:20		31	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	14/6/2016	8:20	Cloudy	29	0.1	10	20	21.1	19	18	0.2	0.5	1.5
	14/6/2016	14:20		32	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	15/6/2016	8:20	Cloudy	29	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	15/6/2016	14:20		32	0.1	10	20	21	19	18	0.2	0.5	1.5
	16/6/2016	8:20	Rain	28	0.1	10	20	21	19	18	0.1	0.5	1.5
	16/6/2016	14:20		31	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	17/6/2016	8:20	Rain	26	0.1	10	20	21.1	19	18	0.2	0.5	1.5
	17/6/2016	14:20		32	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	18/6/2016	8:20	Rain	27	0.1	10	20	21	19	18	0.1	0.5	1.5
	18/6/2016	14:20		31	0.1	10	20	21.1	19	18	0.2	0.5	1.5
	20/6/2016	8:20	Cloudy	28	0.1	10	20	21	19	18	0.1	0.5	1.5
	20/6/2016	14:20		34	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	21/6/2016	8:20	Hazy	28	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	21/6/2016	14:20		33	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	22/6/2016	8:20	Hazy	28	0.1	10	20	21.1	19	18	0.1	0.5	1.5
	22/6/2016	14:20		33	0.1	10	20	21.1	19	18	0.2	0.5	1.5
23/6/2016	8:20	Fine	28	0.1	10	20	21.1	19	18	0.2	0.5	1.5	
23/6/2016	14:20		34	0.1	10	20	21.1	19	18	0.1	0.5	1.5	
24/6/2016	8:20	Sunny	28	0.1	10	20	21.1	19	18	0.1	0.5	1.5	
24/6/2016	14:20		35	0.1	10	20	21.1	19	18	0.2	0.5	1.5	
25/6/2016	8:20	Fine	29	0.1	10	20	21.1	19	18	0.1	0.5	1.5	
25/6/2016	14:20		36	0.1	10	20	21.1	19	18	0.1	0.5	1.5	
27/6/2016	8:20	Cloudy	28	0.1	10	20	21.1	19	18	0.1	0.5	1.5	
27/6/2016	14:20		35	0.1	10	20	21.1	19	18	0.2	0.5	1.5	
28/6/2016	8:20	Rain	26	0.1	10	20	21.1	19	18	0.1	0.5	1.5	
28/6/2016	14:20		32	0.1	10	20	21.1	19	18	0.1	0.5	1.5	
29/6/2016	8:20	Rain	27	0.1	10	20	21.1	19	18	0.1	0.5	1.5	
29/6/2016	14:20		33	0.1	10	20	21.1	19	18	0.2	0.5	1.5	
30/6/2016	8:20	Cloudy	28	0.1	10	20	21.1	19	18	0.1	0.5	1.5	
30/6/2016	14:20		33	0.1	10	20	21.1	19	18	0.1	0.5	1.5	

Remark:

Parameter	Criteria	Measurement
Oxygen	Action Level	< 19%
	Limit Level	< 18%
Methane	Action Level	> 10% LEL (> 0.5% v/v)
	Limit Level	> 20% LEL (>1% v/v)
Carbon Dioxide	Action Level	> 0.5%
	Limit Level	> 1.5%

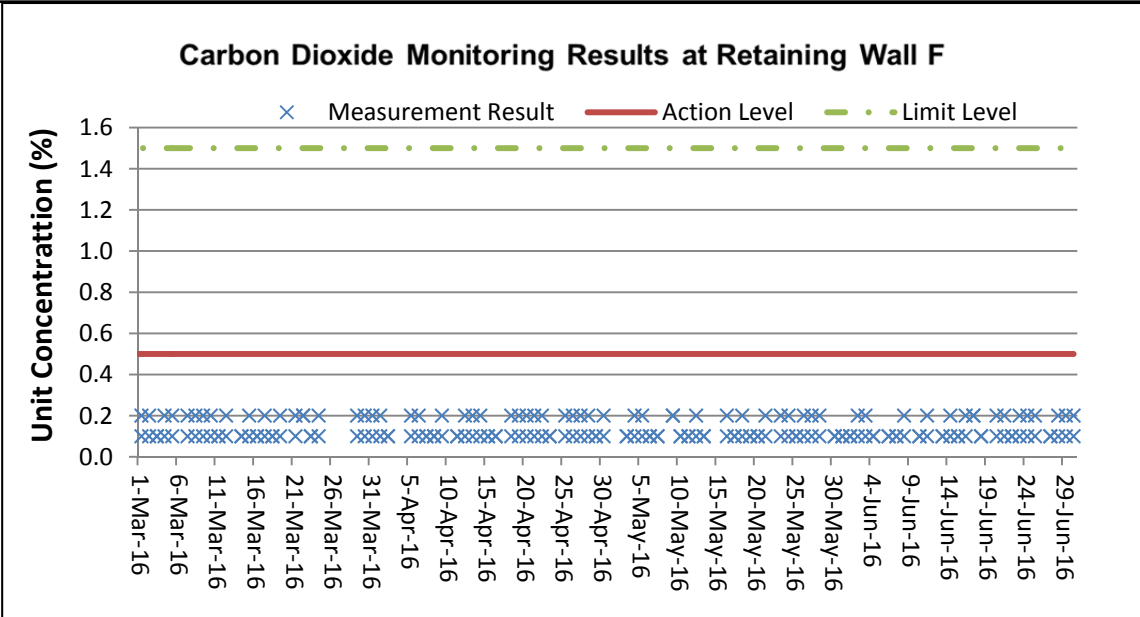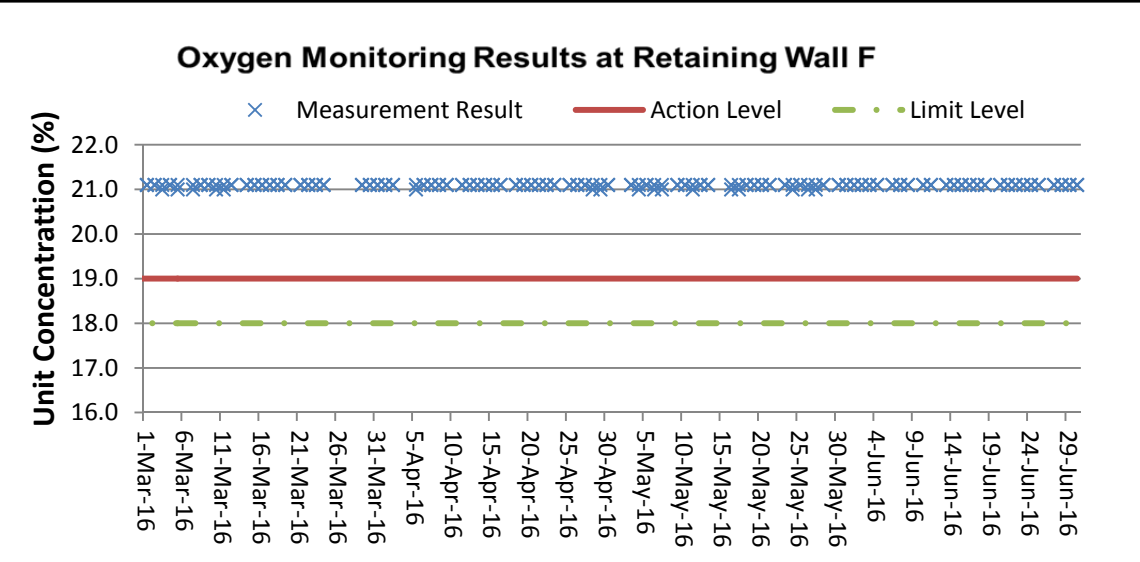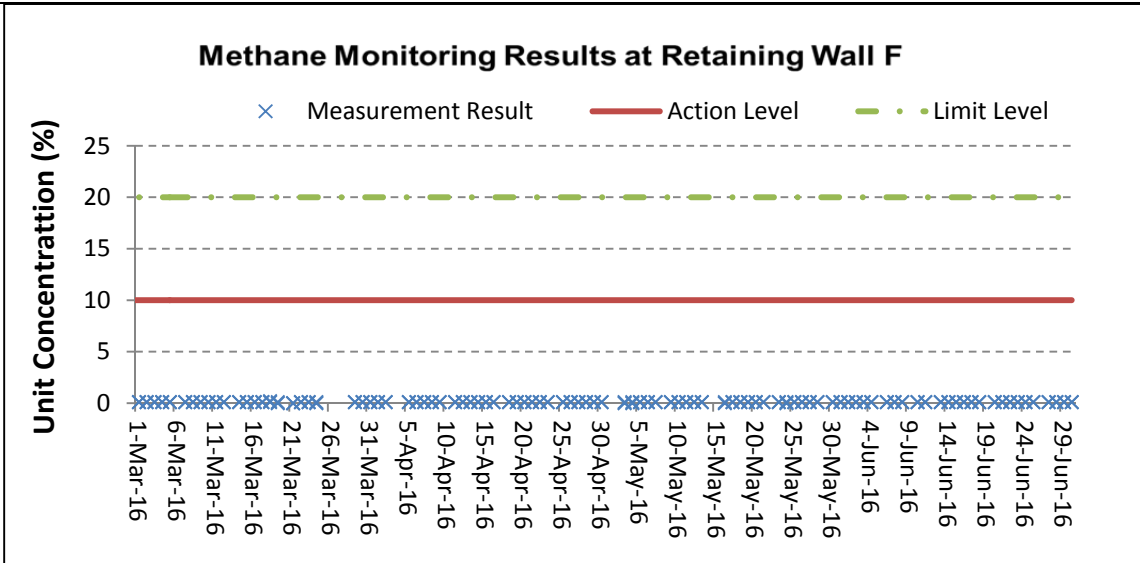

Annotation:
 During 1 March to 30 June 2016, major construction activity was construction of retaining wall F and the specified works included excavation, rock breaking, blinding, formworking, steel-fixing and concreting. The weather condition varied from sunny to rainy. The monitoring data was provided by the Contractor followed to their QA/QC control.

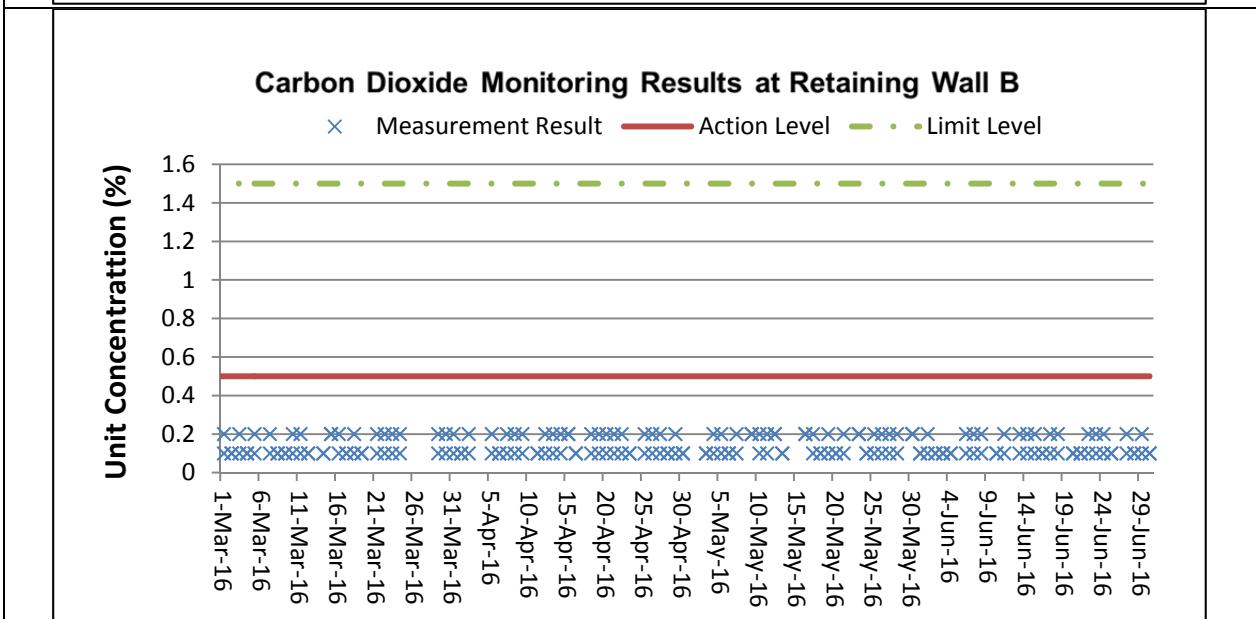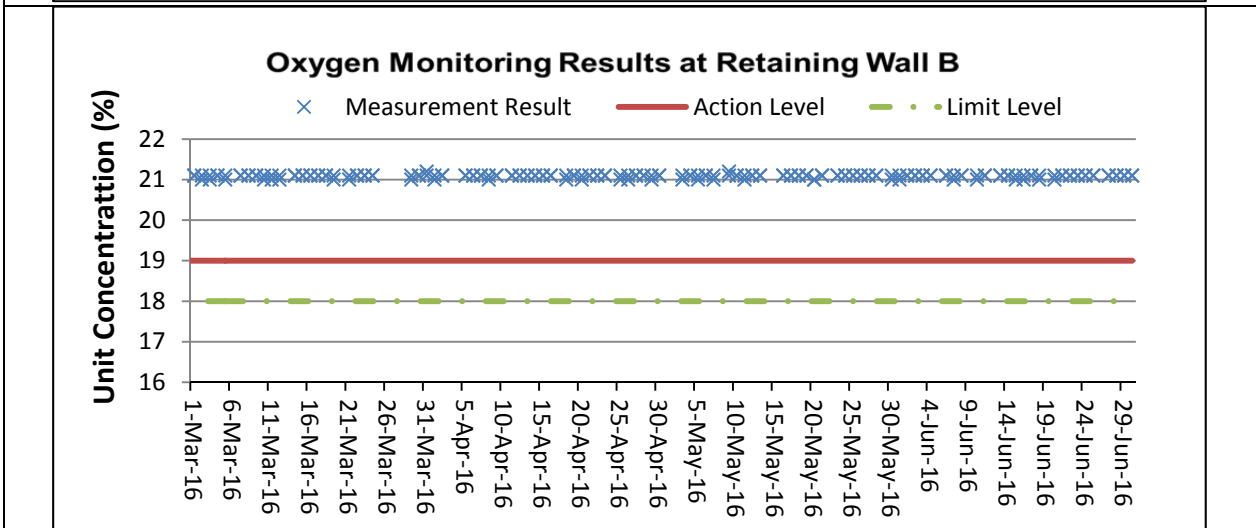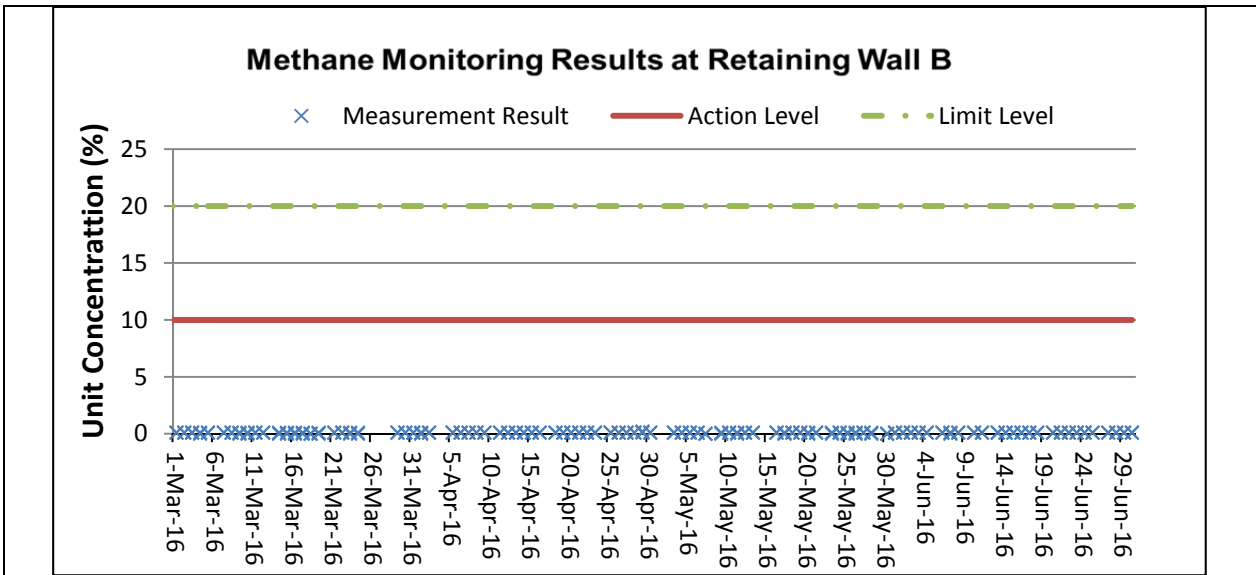

Annotation:

During 1 March to 30 June 2016, major construction activity was construction of retaining wall B and the specified works included excavation, rock breaking, blinding, formworking, steel-fixing and concreting. The weather condition varied from sunny to rainy. The monitoring data was provided by the Contractor followed to their QA/QC control.

Appendix J

Investigation Report for Exceedance

(Not Used)

Appendix K

Checklist for Landscape and Visual Monitoring

Contract No. HY/2013/12

Tuen Mun – Chek Lap Kok Link – Northern Connection Toll Plaza and Associated Works

Landscape and Visual Checklist



Monitoring Date: 3rd June 2016

Item	Environmental Protection Measures	Location/ Timing	Implementation Agent	Status				Remarks
				A	UA	IR	NA	
1	Existing trees on boundary of the Project Area shall be carefully protected during construction. Detailed Tree Protection Specification shall be provided in the Contract Specification. Under this specification, the Contractor shall be required to submit, for approval, a detailed working method statement for the protection of trees prior to undertaking any works adjacent to all retained trees, including trees in contractor's works areas. (Tree protection measures will be detailed at Tree Removal Application stage)	All areas / During construction	Design Consultant/ Contractor	✓				
2	Trees unavoidably affected by the works shall be transplanted where practical. Trees will be transplanted straight to their final receptor site and not held in a temporary nursery. A detailed Tree Transplanting Specification shall be provided in the Contract Specification. Sufficient time for necessary tree root and crown preparation periods shall be allowed in the project programme	All areas / During construction	Design Consultant/ Contractor				✓	Tree Transplanting Specification has been specified in P.S., no transplantation works has been carried out at this stage.
3	Hillside and roadside screen planting to proposed roads, associated structures and slope works	All areas / During construction	Design Consultant/ Contractor				✓	Construction of roads not commenced yet
4	Hydroseeding or sheeting of soil stockpiles with visually unobtrusive material (in earth tone)	All areas / During construction	Design Consultant/ Contractor	✓				
5	Screening of construction works by hoardings around works area in visually unobtrusive colours, to screen works	All areas / During construction	Design Consultant/ Contractor				✓	For some area, erection of hoarding was not feasible due to

									the limitation of traffic sight line; water barrier with panel was used to screen works.
6	Control night-time lighting and glare by hooding all lights	All areas / During construction	Design Consultant/ Contractor	✓					Only temporary traffic management lighting was applied.
7	Ensure no run-off into water body adjacent to the Project Area	All areas / During construction	Design Consultant/ Contractor	✓					
8	Avoidance of excessive height and bulk of buildings and structures	All areas / During construction	Design Consultant/ Contractor				✓		No high-rise building would be constructed.
9	Recycle/Reuse all felled trees and vegetation, e.g. mulching	All areas / During construction	Design Consultant/ Contractor	✓					Recycle of trees carried out licensed recycler was conducted.
10	Compensatory tree planting shall be provided to the satisfaction of relevant Government departments. Required numbers and locations of compensatory trees shall be determined and agreed separately with Government during the Tree Felling Application process under ETWBTC 3/2006	All areas / During construction	Design Consultant/ Contractor					✓	Compensatory planting will be carry out in later stage of the project.

Legend: A=Acceptable, UA= Unacceptable, IR=Improvement Required, N/A=Not Applicable

Note: All item reference to Technical Memorandum on Environmental Impact Assessment, TM-CLKL EIA Section 10.9 & Project EM&A Manual Section 7.6

Checked and Monitored by: Chung Koon Wah Albert (RLA) No. R-150 (Date) 5/7/2016

Checked by: [Signature] (ET) 13/7/2016 (Date)

Checked by: [Signature] (IEC) 14/7/2016 (Date)



Item 1. Existing trees on boundary of the Project Area should be protected carefully during construction.



Item 4. Hydro-seeding or sheeting provided at stockpile.



Item 5. Hoarding with panel around works area & Item 6. Temporary traffic management lighting.



Item 7. Ensure no run-off into water body.



Item 9. Recycle of felled trees as facilities to reuse.

Contract No. HY/2013/12

Tuen Mun – Chek Lap Kok Link – Northern Connection Toll Plaza and Associated Works

Landscape and Visual Checklist



中國路橋
CRBC



基利

Monitoring Date: 10th June 2016

Item	Environmental Protection Measures	Location/ Timing	Implementation Agent	Status				Remarks
				A	UA	IR	NA	
1	Existing trees on boundary of the Project Area shall be carefully protected during construction. Detailed Tree Protection Specification shall be provided in the Contract Specification. Under this specification, the Contractor shall be required to submit, for approval, a detailed working method statement for the protection of trees prior to undertaking any works adjacent to all retained trees, including trees in contractor's works areas. (Tree protection measures will be detailed at Tree Removal Application stage)	All areas / During construction	Design Consultant/ Contractor	✓				
2	Trees unavoidably affected by the works shall be transplanted where practical. Trees will be transplanted straight to their final receptor site and not held in a temporary nursery. A detailed Tree Transplanting Specification shall be provided in the Contract Specification. Sufficient time for necessary tree root and crown preparation periods shall be allowed in the project programme	All areas / During construction	Design Consultant/ Contractor				✓	Tree Transplanting Specification has been specified in P.S., no transplantation works has been carried out at this stage.
3	Hillside and roadside screen planting to proposed roads, associated structures and slope works	All areas / During construction	Design Consultant/ Contractor				✓	Construction of roads not commenced yet
4	Hydroseeding or sheeting of soil stockpiles with visually unobtrusive material (in earth tone)	All areas / During construction	Design Consultant/ Contractor	✓				
5	Screening of construction works by hoardings around works area in visually unobtrusive colours, to screen works	All areas / During construction	Design Consultant/ Contractor				✓	For some area, erection of hoarding was not feasible due to

										the limitation of traffic sight line; water barrier with panel was used to screen works.
6	Control night-time lighting and glare by hooding all lights	All areas / During construction	Design Consultant/ Contractor	✓						Only temporary traffic management lighting was applied.
7	Ensure no run-off into water body adjacent to the Project Area	All areas / During construction	Design Consultant/ Contractor	✓						
8	Avoidance of excessive height and bulk of buildings and structures	All areas / During construction	Design Consultant/ Contractor						✓	No high-rise building would be constructed.
9	Recycle/Reuse all felled trees and vegetation, e.g. mulching	All areas / During construction	Design Consultant/ Contractor	✓						Recycle of trees carried out licensed recycler was conducted.
10	Compensatory tree planting shall be provided to the satisfaction of relevant Government departments. Required numbers and locations of compensatory trees shall be determined and agreed separately with Government during the Tree Felling Application process under ETWBTC 3/2006	All areas / During construction	Design Consultant/ Contractor						✓	Compensatory planting will be carry out in later stage of the project.

Legend: A=Acceptable, UA= Unacceptable, IR=Improvement Required, N/A=Not Applicable

Note: All item reference to Technical Memorandum on Environmental Impact Assessment, TM-CLKL EIA Section 10.9 & Project EM&A Manual Section 7.6

Checked and Monitored by: Chung Koon Wah Albert (RLA) No. R-150 (Date) 5/7/2016

Checked by: [Signature] (ET) 13/7/2016 (Date)

Checked by: [Signature] (IEC) 14/7/2016 (Date)



Item 1. Existing trees on boundary of the Project Area should be protected carefully during construction.




Item 4. Hydro-seeding or sheeting provided at stockpile.



Item 5. Hoarding with panel around works area & Item 6. Temporary traffic management lighting.



Item 7. Ensure no run-off into water body.

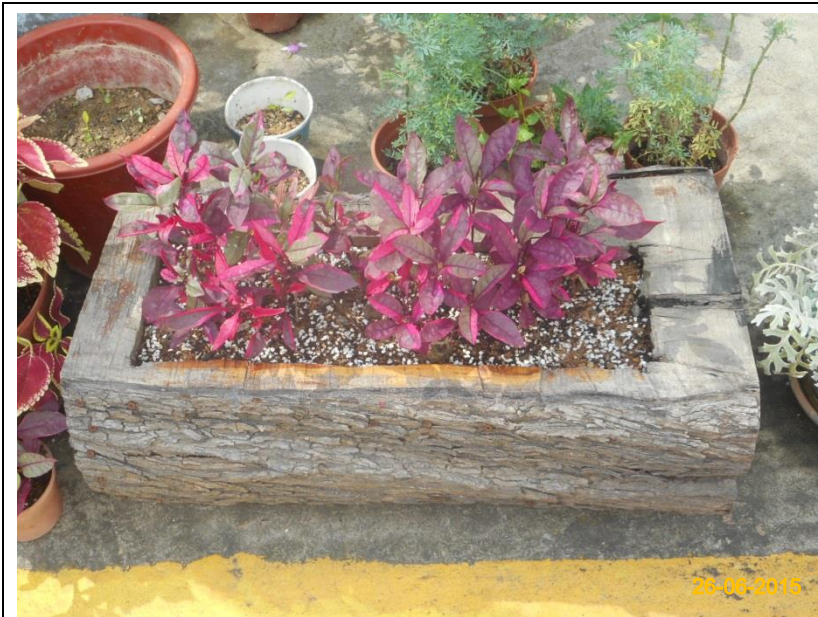

Item 9. Recycle of felled trees as facilities to reuse.

Contract No. HY/2013/12

Tuen Mun – Chek Lap Kok Link – Northern Connection Toll Plaza and Associated Works

Landscape and Visual Checklist



中國路橋
CRBC

Kaden

基利

Monitoring Date: 17th June 2016

Item	Environmental Protection Measures	Location/ Timing	Implementation Agent	Status			Remarks
				A	UA	IR	
1	Existing trees on boundary of the Project Area shall be carefully protected during construction. Detailed Tree Protection Specification shall be provided in the Contract Specification. Under this specification, the Contractor shall be required to submit, for approval, a detailed working method statement for the protection of trees prior to undertaking any works adjacent to all retained trees, including trees in contractor's works areas. (Tree protection measures will be detailed at Tree Removal Application stage)	All areas / During construction	Design Consultant/ Contractor	✓			
2	Trees unavoidably affected by the works shall be transplanted where practical. Trees will be transplanted straight to their final receptor site and not held in a temporary nursery. A detailed Tree Transplanting Specification shall be provided in the Contract Specification. Sufficient time for necessary tree root and crown preparation periods shall be allowed in the project programme	All areas / During construction	Design Consultant/ Contractor				Tree Transplanting Specification has been specified in P.S., no transplantation works has been carried out at this stage.
3	Hillside and roadside screen planting to proposed roads, associated structures and slope works	All areas / During construction	Design Consultant/ Contractor				Construction of roads not commenced yet
4	Hydroseeding or sheeting of soil stockpiles with visually unobtrusive material (in earth tone)	All areas / During construction	Design Consultant/ Contractor	✓			
5	Screening of construction works by hoardings around works area in visually unobtrusive colours, to screen works	All areas / During construction	Design Consultant/ Contractor				For some area, erection of hoarding was not feasible due to

									the limitation of traffic sight line; water barrier with panel was used to screen works.
6	Control night-time lighting and glare by hooding all lights	All areas / During construction	Design Consultant/ Contractor	✓					Only temporary traffic management lighting was applied.
7	Ensure no run-off into water body adjacent to the Project Area	All areas / During construction	Design Consultant/ Contractor	✓					
8	Avoidance of excessive height and bulk of buildings and structures	All areas / During construction	Design Consultant/ Contractor				✓		No high-rise building would be constructed.
9	Recycle/Reuse all felled trees and vegetation, e.g. mulching	All areas / During construction	Design Consultant/ Contractor	✓					Recycle of trees carried out licensed recycler was conducted.
10	Compensatory tree planting shall be provided to the satisfaction of relevant Government departments. Required numbers and locations of compensatory trees shall be determined and agreed separately with Government during the Tree Felling Application process under ETWBTC 3/2006	All areas / During construction	Design Consultant/ Contractor					✓	Compensatory planting will be carry out in later stage of the project.

Legend: A=Acceptable, UA= Unacceptable, IR=Improvement Required, N/A=Not Applicable

Note: All item reference to Technical Memorandum on Environmental Impact Assessment, TM-CLKL EIA Section 10.9 & Project EM&A Manual Section 7.6

Checked and Monitored by: Chung Koon Wah Albert (RLA) No. R-150 (Date) 5/7/2016

Checked by: [Signature] (ET) 13/7/2016 (Date)

Checked by: [Signature] (IEC) 14/7/2016 (Date)



Item 1. Existing trees on boundary of the Project Area should be protected carefully during construction.



Item 4. Hydro-seeding or sheeting provided at stockpile.



Item 5. Hoarding with panel around works area & Item 6. Temporary traffic management lighting.



Item 7. Ensure no run-off into water body.



Item 9. Recycle of felled trees as facilities to reuse.

Contract No. HY/2013/12

Tuen Mun – Chek Lap Kok Link – Northern Connection Toll Plaza and Associated Works
Landscaping and Visual Checklist



中國路橋
CRBC



Monitoring Date: 24th June 2016

Item	Environmental Protection Measures	Location/ Timing	Implementation Agent	Status			Remarks
				A	UA	IR	
1	Existing trees on boundary of the Project Area shall be carefully protected during construction. Detailed Tree Protection Specification shall be provided in the Contract Specification. Under this specification, the Contractor shall be required to submit, for approval, a detailed working method statement for the protection of trees prior to undertaking any works adjacent to all retained trees, including trees in contractor's works areas. (Tree protection measures will be detailed at Tree Removal Application stage)	All areas / During construction	Design Consultant/ Contractor	✓			
2	Trees unavoidably affected by the works shall be transplanted where practical. Trees will be transplanted straight to their final receptor site and not held in a temporary nursery. A detailed Tree Transplanting Specification shall be provided in the Contract Specification. Sufficient time for necessary tree root and crown preparation periods shall be allowed in the project programme	All areas / During construction	Design Consultant/ Contractor			✓	Tree Transplanting Specification has been specified in P.S., no transplantation works has been carried out at this stage.
3	Hillside and roadside screen planting to proposed roads, associated structures and slope works	All areas / During construction	Design Consultant/ Contractor			✓	Construction of roads not commenced yet
4	Hydroseeding or sheeting of soil stockpiles with visually unobtrusive material (in earth tone)	All areas / During construction	Design Consultant/ Contractor	✓			
5	Screening of construction works by hoardings around works area in visually unobtrusive colours, to screen works	All areas / During construction	Design Consultant/ Contractor			✓	For some area, erection of hoarding was not feasible due to

										the limitation of traffic sight line; water barrier with panel was used to screen works.
6	Control night-time lighting and glare by hooding all lights	All areas / During construction	Design Consultant/ Contractor	√						Only temporary traffic management lighting was applied.
7	Ensure no run-off into water body adjacent to the Project Area	All areas / During construction	Design Consultant/ Contractor	√						
8	Avoidance of excessive height and bulk of buildings and structures	All areas / During construction	Design Consultant/ Contractor					√		No high-rise building would be constructed.
9	Recycle/Reuse all felled trees and vegetation, e.g. mulching	All areas / During construction	Design Consultant/ Contractor	√						Recycle of trees carried out licensed recycler was conducted.
10	Compensatory tree planting shall be provided to the satisfaction of relevant Government departments. Required numbers and locations of compensatory trees shall be determined and agreed separately with Government during the Tree Felling Application process under ETWBTC 3/2006	All areas / During construction	Design Consultant/ Contractor					√		Compensatory planting will be carry out in later stage of the project.

Legend: A=Acceptable, UA= Unacceptable, IR=Improvement Required, N/A=Not Applicable

Note: All item reference to Technical Memorandum on Environmental Impact Assessment, TM-CLKL EIA Section 10.9 & Project EM&A Manual Section 7.6

Checked and Monitored by: Chung Koon Wah Albert (RLA) No. R-150 (Date) 5/7/2016

Checked by: [Signature] (ET) 13/7/2016 (Date)

Checked by: [Signature] (IEC) 14/7/2016 (Date)



Item 1. Existing trees on boundary of the Project Area should be protected carefully during construction.



Item 4. Hydro-seeding or sheeting provided at stockpile.



Item 5. Hoarding with panel around works area & Item 6. Temporary traffic management lighting.



Item 7. Ensure no run-off into water body.



Item 9. Recycle of felled trees as facilities to reuse.

Appendix L

Monthly Summary Waste Flow Table

Appendix A –Monthly Waste Flow Table

Monthly Summary Waste Flow Table for 2016 (year)

Month	Annual Quantities of Inert C&D Materials Generated Monthly						Annual Quantities of C&D Wastes Generated Monthly				
	Total Quantity Generated	Broken Concrete	Reused in the Contract	Reused in other Projects	Disposed as Public Fill	Imported Fill	Metals	Paper / cardboard packaging	Plastics & Rubber (see note 2)	Chemical Waste	Others (general refuse)
	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000m ³)
Jan	32.146	0.000	12.964	18.171	0.922	0	0.000	0.000	0.000	0.000	0.089
Feb	14.751	0.000	7.894	5.755	1.036	0	0.000	0.000	0.000	0.000	0.066
Mar	23.310	0.000	16.333	6.392	0.496	0	0.000	0.000	0.000	0.000	0.089
Apr	20.350	0.000	15.186	4.939	0.071	0	0.000	0.000	0.000	0.000	0.154
May	14.259	0.000	11.511	2.658	0	0	0.000	0.000	0.000	0.000	0.09
June	15.056	0.000	10.647	2.935	1.377	0	0.000	0.000	0.000	0.000	0.097
Sub-total	119.872	0.000	74.535	40.850	3.902	0.000	0.000	0.000	0.000	0.000	0.585
July											
Aug											
Sept											
Oct											
Nov											
Dec											
Total	119.872	0.000	74.535	40.850	3.902	0.000	0.000	0.000	0.000	0.000	0.585

Notes:

- 1 The waste flow table shall also include C&D materials that are specified in the contract to be imported for use at the Site.
- 2 Plastics refer to plastic bottles/containers, plastic sheets/foam from packaging materials.
- 3 Broken concrete for recycling into aggregates.

Appendix M

Environmental Mitigation and Enhancement Measures Implementation Schedule (EMIS)

CONTRACT NO. HY/2013/12

**TUEN MUN – CHECK LAP KOK LINK – NORTHERN CONNECTION TOLL PLAZA AND ASSOCIATED WORKS
ENVIRONMENTAL MITIGATION AND ENHANCEMENT MEASURE IMPLEMENTATION SCHEDULE**

Air Quality									
EIA reference	EM&A Manual reference	Environmental Protection Measures	Location/ Timing	Implementation Agent	Relevant Standard or Requirement	Implementation Stages			Status *
						D	C	O	
4.8.1	3.8	An effective watering programme of twice daily watering with complete coverage, is estimated to reduce by 50%. This is recommended for all areas in order to reduce dust levels to a minimum;	All areas / throughout construction period	Contractor	TMEIA Avoid smoke impacts and disturbance		Y		✓
4.8.1	3.8	Watering of the construction sites in Lantau for 8 times/day and in Tuen Mun for 12 times/day to reduce dust emissions by 87.5% and 91.7% respectively and shall be undertaken.	All areas / throughout construction period	Contractor	TMEIA Avoid dust generation		Y		✓
4.8.1	3.8	The Contractor shall, to the satisfaction of the Engineer, install effective dust suppression measures and take such other measures as may be necessary to ensure that at the Site boundary and any nearby sensitive receiver, dust levels are kept to acceptable levels.	All areas / throughout construction period	Contractor	TMEIA Avoid dust generation		Y		✓
4.8.1	3.8	The Contractor shall not burn debris or other materials on the works areas.	All areas / throughout construction period	Contractor	TMEIA Avoid dust generation		Y		✓
4.8.1	3.8	In hot, dry or windy weather, the watering programme shall maintain all exposed road surfaces and dust sources wet.	All unpaved haul roads / throughout construction period in hot, dry or windy weather	Contractor	TMEIA Avoid smoke impacts and disturbance		Y		<>
4.8.1	3.8	Where breaking of oversize rock/concrete is required, watering shall be implemented to control dust. Water spray shall be used during the handling of fill material at the site and at active cuts, excavation and fill sites where dust is likely to be created.	All areas / throughout construction period	Contractor	TMEIA Avoid dust generation		Y		<>
4.8.1	3.8	Open dropping heights for excavated materials shall be controlled to a maximum height of 2m to minimise the fugitive dust arising from unloading.	All areas / throughout construction period	Contractor	TMEIA Avoid dust generation		Y		✓

CONTRACT NO. HY/2013/12

**TUEN MUN – CHECK LAP KOK LINK – NORTHERN CONNECTION TOLL PLAZA AND ASSOCIATED WORKS
ENVIRONMENTAL MITIGATION AND ENHANCEMENT MEASURE IMPLEMENTATION SCHEDULE**

4.8.1	3.8	During transportation by truck, materials shall not be loaded to a level higher than the side and tail boards, and shall be dampened or covered before transport.	All areas / throughout construction period	Contractor	TMEIA Avoid dust generation		Y		✓
4.8.1	3.8	Materials having the potential to create dust shall not be loaded to a level higher than the side and tail boards, and shall be covered by a clean tarpaulin. The tarpaulin shall be properly secured and shall extend at least 300mm over the edges of the side and tail boards.	All areas / throughout construction period	Contractor	TMEIA Avoid dust generation		Y		✓
4.8.1	3.8	No earth, mud, debris, dust and the like shall be deposited on public roads. Wheel washing facility shall be usable prior to any earthworks excavation activity on the site.	construction period	Contractor	TMEIA Avoid dust generation		Y		✓
4.8.1	3.8	Areas of exposed soil shall be minimized to areas in which works have been completed shall be restored as soon as is practicable.	All exposed surfaces / throughout construction period	Contractor	TMEIA Avoid dust generation		Y		✓
4.8.1	3.8	All stockpiles of aggregate or spoil shall be enclosed or covered and water applied in dry or windy condition.	All areas / throughout construction period	Contractor	TMEIA Avoid dust generation		Y		✓
4.11	Section 3	EM&A in the form of 1 hour and 24 hour dust monitoring and site audit	All representative existing ASRs / throughout construction period	Contractor	EM&A Manual		Y		✓

Cultural Heritage

EIA reference	EM&A Manual reference	Environmental Protection Measures	Location/ Timing	Implementation Agent	Relevant Standard or Requirement	Implementation Stages			Status
						D	C	O	
11.8	Section 9	EM&A in the form of audit of the mitigation measures	All areas / throughout construction period	Highways Department	EIAO-TM		Y		✓

Ecology

EIA reference	EM&A Manual reference	Environmental Protection Measures	Location/ Timing	Implementation Agent	Relevant Standard or Requirement	Implementation Stages			Status
						D	C	O	

CONTRACT NO. HY/2013/12

**TUEN MUN – CHECK LAP KOK LINK – NORTHERN CONNECTION TOLL PLAZA AND ASSOCIATED WORKS
ENVIRONMENTAL MITIGATION AND ENHANCEMENT MEASURE IMPLEMENTATION SCHEDULE**

7.13#	6.3, 6.5#	Fencing or other physical barriers for protection of Pitcher Plant around Zones 8, 9 and 10 and the temporary nursery site	Tuen Mun Area 46 shrubland/ Detailed/ Prior to construction	Design Consultant/ Contractor	TMEIA	Y	Y		✓
7.13	6.5	Audit Pitcher Plant protection measures	Tuen Mun Area 46	Contractor	TMEIA		Y		✓
7.13	6.5	The loss of habitat shall be supplemented by enhancement planting in accordance with the landscape mitigation schedule.	All areas / As soon as accessible	Contractor	TMEIA		Y		✓
7.13	6.5	Spoil heaps shall be covered at all times.	All areas / Throughout construction period	Contractor	TMEIA		Y		✓
7.13	6.5	Avoid damage and disturbance to the remaining and surrounding natural habitat	All areas / Throughout construction period	Contractor	TMEIA		Y		✓
7.13	6.5	Placement of equipment in designated areas within the existing disturbed land	All areas / Throughout construction period	Contractor	TMEIA		Y		✓
7.13	6.5	Disturbed areas to be reinstated immediately after completion of the works.	All areas / Throughout construction period	Contractor	TMEIA		Y		✓
7.13	6.5	Construction activities should be restricted to the proposed works boundary	All areas / Throughout construction	Contractor	TMEIA		Y		✓

Landfill Gas Hazard Assessment

EIA reference	EM&A Manual reference	Environmental Protection Measures	Location/ Timing	Implementation Agent	Relevant Standard or Requirement	Implementation Stages			Status
						D	C	O	
14.12.2	14.2	<u>Appointment of Safety Officer</u> Appoint a properly trained safety officer and provide with appropriate equipment to measure and monitor LFG hazard. The monitoring frequency and areas to be monitored should be set down prior to commencement of ground-works either by the Safety Officer or an approved and appropriately qualified person.	Construction Stage	Contractor	EPD/TR8/97 - Landfill Gas Hazard Assessment Guidance Note		Y		✓
14.12.2	-	<u>Safety Measures - Excavation</u>	Construction Stage	Contractor	EPD/TR8/97 -		Y		✓

CONTRACT NO. HY/2013/12

**TUEN MUN – CHECK LAP KOK LINK – NORTHERN CONNECTION TOLL PLAZA AND ASSOCIATED WORKS
ENVIRONMENTAL MITIGATION AND ENHANCEMENT MEASURE IMPLEMENTATION SCHEDULE**

		Staff should receive appropriate training on working in areas susceptible to landfill gas, fire and explosion hazards. Excavation procedures and code of practice should be implemented.			Landfill Gas Hazard Assessment Guidance Note				
14.12.2	-	<u>Safety Measures – Welding, Flame- Cutting and Hot works</u> Hot works should be confined to open areas away from any trench or excavation. Should hot works must be carried out in trenches or confined space, “permit to work” procedures should be followed.	Construction Stage	Contractor	EPD/TR8/97 - Landfill Gas Hazard Assessment Guidance Note		Y		✓
14.12.2	-	<u>Safety Measures – Enclosed Spaces</u> Site offices or buildings located within PPV Landfill Consultation Zone which have the capacity to accumulate landfill gas, then they should either be located in an area which has been proven to be free of landfill gas; or be raised clear of the ground by a minimum of 500mm.	Site office, building, tunnel, subway, confined area / Construction Stage	Contractor	EPD/TR8/97 - Landfill Gas Hazard Assessment Guidance Note		Y		✓
14.12.2	-	<u>Safety Measures – Electrical Equipment</u> Any electrical equipment, such as motors and extension cords, should be intrinsically safe.	Construction Stage	Contractor	EPD/TR8/97 - Landfill Gas Hazard Assessment Guidance Note		Y		✓
14.12.2	-	<u>Safety Measures – Piping</u> During piping assembly or conduiting construction, all valves/seals should be closed immediately after installation. As construction progresses, all valves/seals should be closed as installed to prevent the migration of gases through the pipeline/conduit. All piping/conduiting should be capped at the end of each working day.	Services & utilities / Construction Stage	Contractor	EPD/TR8/97 - Landfill Gas Hazard Assessment Guidance Note		Y		✓
14.12.2	-	<u>Safety Measures – Fire Safety</u> Adequate fire safety equipments should be provided on site. Workers and visitors should be notified of the potential fire hazards. Safety notices should be	Construction Stage	Contractor	EPD/TR8/97 - Landfill Gas Hazard Assessment		Y		✓

CONTRACT NO. HY/2013/12

TUEN MUN – CHECK LAP KOK LINK – NORTHERN CONNECTION TOLL PLAZA AND ASSOCIATED WORKS
 ENVIORNMENTAL MITIGATION AND ENHANCEMENT MEASURE IMPLEMENTATION SCHEDULE

		posted around the site warning the anger and potential hazards.			Guidance Note				
14.12.1	-	<u>Safety Measures – Confined Spaces</u> Precautionary measures should include ensuring that staff members are aware of the potential hazards of working in confined spaces, and that appropriate monitoring procedures are in place to prevent hazards in confined spaces.	Confined space / Construction Stage	Contractor	EPD/TR8/97 - Landfill Gas Hazard Assessment Guidance Note		Y		✓
14.12.1	-	<u>Monitoring</u> Periodically during ground-works within the Consultation Zone, the works area should be monitored for methane, carbon dioxide and oxygen using appropriately calibrated portable gas detection equipment. Depending on the results of the measurements, actions required will vary. As a minimum these should encompass those actions specified in Table 14.8 of the EIA Report or Table 14.1 of the EM&A Manual.	Construction Stage	Contractor	EPD/TR8/97 - Landfill Gas Hazard Assessment Guidance Note		Y		✓

Landscape and Visual

EIA reference	EM&A Manual reference	Environmental Protection Measures	Location/ Timing	Implementation Agent	Relevant Standard or Requirement	Implementation Stages			Status
						D	C	O	
10.9	7.6	Existing trees on boundary of the Project Area shall be carefully protected during construction. Detailed Tree Protection Specification shall be provided in the Contract Specification. Under this specification, the Contractor shall be required to submit, for approval, a detailed working method statement for the protection of trees prior to undertaking any works adjacent to all retained trees, including trees in contractor's works areas. (Tree protection measures will be detailed at Tree Removal Application stage) (CM1)	All areas/detailed design/ during construction	Design Consultant/ Contractor	TMEIA	Y	Y		✓
10.9	7.6	Trees unavoidably affected by the works shall be transplanted where practical. Trees will be	All areas/detailed design/ during	Design Consultant/	TMEIA	Y	Y		NA

CONTRACT NO. HY/2013/12

**TUEN MUN – CHECK LAP KOK LINK – NORTHERN CONNECTION TOLL PLAZA AND ASSOCIATED WORKS
ENVIRONMENTAL MITIGATION AND ENHANCEMENT MEASURE IMPLEMENTATION SCHEDULE**

		transplanted straight to their final receptor site and not held in a temporary nursery. A detailed Tree Transplanting Specification shall be provided in the Contract Specification. Sufficient time for necessary tree root and crown preparation periods shall be allowed in the project programme (CM2)	construction	Contractor					
10.9	7.6	Hillside and roadside screen planting to proposed roads, associated structures and slope works (CM3)	All areas/detailed design/ during Construction/ post construction	Design Consultant/ Contractor	TMEIA	Y	Y		NA
10.9	7.6	Hydroseeding or sheeting of soil stockpiles with visually unobtrusive material (in earth tone) (CM4)	All areas/detailed design/ during Construction/ post construction	Design Consultant/ Contractor	TMEIA	Y	Y		✓
10.9	7.6	Screening of construction works by hoardings around works area in visually unobtrusive colours, to screen works (CM5)	All areas/detailed design/ during Construction	Design Consultant/ Contractor	TMEIA	Y	Y		<>
10.9	7.6	Control night-time lighting and glare by hooding all lights (CM6)	All areas/detailed design/ during Construction	Design Consultant/ Contractor	TMEIA	Y	Y		✓
10.9	7.6	Ensure no run-off into water body adjacent to the Project Area (CM7)	All areas/detailed design/ during Construction	Design Consultant/ Contractor	TMEIA	Y	Y		✓
10.9	7.6	Avoidance of excessive height and bulk of buildings and structures (CM8)	All areas/detailed design/ during Construction	Design Consultant/ Contractor	TMEIA	Y	Y		✓
10.9	7.6	Recycle/Reuse all felled trees and vegetation, e.g. mulching (CM9)	All areas/detailed design/ during Construction	Design Consultant/ Contractor	TMEIA	Y	Y		✓
10.9	7.6	Compensatory tree planting shall be provided to the satisfaction of relevant Government departments. Required numbers and locations of compensatory trees shall be determined and agreed separately with Government during the Tree Felling Application process under ETWBTC 3/2006 (CM10)	All areas/detailed design/ during Construction	Design Consultant/ Contractor	TMEIA	Y	Y		NA
10.9	7.6	Re-vegetation of affected woodland/shrubland with	All areas/detailed design/ during Construction	Design	TMEIA	Y	Y	Y	N/A

CONTRACT NO. HY/2013/12

**TUEN MUN – CHECK LAP KOK LINK – NORTHERN CONNECTION TOLL PLAZA AND ASSOCIATED WORKS
ENVIRONMENTAL MITIGATION AND ENHANCEMENT MEASURE IMPLEMENTATION SCHEDULE**

		native species (OM1)	during Construction/ post construction	Consultant/ Contractor					
10.9	7.6	Tall buffer screen tree / shrub / climber planting where appropriate should be incorporated to soften hard engineering structures and facilities (OM2)	All areas/detailed design/ during Construction/ post construction	Design Consultant/ Contractor	TMEIA	Y	Y	Y	N/A
10.9	7.6	Streetscape elements (e.g. paving, signage, street furniture, lighting etc.) shall be sensitively designed in a manner that responds to the local context, and minimises potential negative landscape and visual impacts. Lighting units should be directional and minimize unnecessary light spill (OM3)	All areas/detailed design/ during Construction/ post construction	Design Consultant/ Contractor	TMEIA	Y	Y	Y	N/A
10.9	7.6	Structure, ornamental tree / shrub / climber planting should be provided along roadside amenity strips, central dividers and newly formed slopes to enhance the townscape quality and further greenery enhancement (OM4)	All areas/detailed design/ during Construction/ post construction	Design Consultant/ Contractor	TMEIA	Y	Y	Y	N/A
10.9	7.6	Aesthetically pleasing design (visually unobtrusive and non-reflective) as regard to the form, material and finishes shall be incorporated to all buildings, engineering structures and associated infrastructure facilities (OM5)	All areas/detailed design/ during Construction/ post construction	Design Consultant/ Contractor	TMEIA	Y	Y	Y	N/A
10.9	7.6	Avoidance of excessive height and bulk of buildings and structures (OM6)	All areas/detailed design/ during Construction/ post construction	Design Consultant/ Contractor	TMEIA	Y	Y	Y	✓
Waste									
EIA reference	EM&A Manual reference	Environmental Protection Measures	Location/ Timing	Implementation Agent	Relevant Standard or Requirement	Implementation Stages			Status
						D	C	O	
12.6		The Contractor shall identify a coordinator for the management of waste.	Contract mobilisation	Contractor	TMEIA		Y		✓
12.6		The Contractor shall prepare and implement a Waste Management Plan which specifies procedures such	Contract mobilisation	Contractor	TMEIA, Works Branch		Y		✓

CONTRACT NO. HY/2013/12

**TUEN MUN – CHECK LAP KOK LINK – NORTHERN CONNECTION TOLL PLAZA AND ASSOCIATED WORKS
ENVIRONMENTAL MITIGATION AND ENHANCEMENT MEASURE IMPLEMENTATION SCHEDULE**

		as a ticketing system, to facilitate tracking of loads and to ensure that illegal disposal of wastes does not occur, and protocols for the maintenance of records of the quantities of wastes generated, recycled and disposed. A recording system for the amount of waste generated, recycled and disposed (locations) should be established.			Technical Circular No. 5/99 for the Trip-ticket System for Disposal of Construction and Demolition Material				
12.6		The Contractor shall apply for and obtain the appropriate licenses for the disposal of public fill, chemical waste and effluent discharges.	Contract mobilisation	Contractor	TMEIA, Land (Miscellaneous Provisions) Ordinance (Cap 28); Waste Disposal Ordinance (Cap 354); Dumping at Sea Ordinance (Cap 466); Water Pollution Control Ordinance.		Y		✓
12.6	8.1	Training shall be provided to workers about the concepts of site cleanliness and appropriate waste management procedures including waste reduction, reuse and recycling	Contract mobilisation	Contractor	TMEIA		Y		✓
12.6	8.1	The extent of cutting operation should be optimised where possible. Earth retaining structures and bored pile walls should be proposed to minimize the extent of cutting.	All areas / throughout construction period	Contractor	TMEIA		Y		✓

CONTRACT NO. HY/2013/12

**TUEN MUN – CHECK LAP KOK LINK – NORTHERN CONNECTION TOLL PLAZA AND ASSOCIATED WORKS
ENVIRONMENTAL MITIGATION AND ENHANCEMENT MEASURE IMPLEMENTATION SCHEDULE**

12.6	8.1	Inert C&D materials from the toll plaza cut slopes shall be reused for construction of the raised platform for the toll plaza where possible.	Toll Plaza / toll plaza construction period	Contractor	TMEIA		Y		✓
12.6	8.1	The site and surroundings shall be kept tidy and litter free.	All areas / throughout construction period	Contractor	TMEIA		Y		✓
12.6	8.1	No waste shall be burnt on site.	All areas / throughout construction period	Contractor	TMEIA		Y		✓
12.6	8.1	The Contractor shall be prohibited from disposing of C&D materials at any sensitive locations. The Contractor should propose the final disposal sites in the EMP and WMP for approval before implementation.	All areas / throughout construction period	Contractor	TMEIA		Y		✓
12.6	8.1	Stockpiled material shall be covered by tarpaulin and /or watered as appropriate to prevent windblown dust/ surface run off.	All areas / throughout construction period	Contractor	TMEIA		Y		◇
12.6	8.1	Excavated material in trucks shall be covered by tarpaulins to reduce the potential for spillage and dust generation.	All areas / throughout construction period	Contractor	TMEIA		Y		✓
12.6	8.1	Wheel washing facilities shall be used by all trucks leaving the site to prevent transfer of mud onto public roads.	All areas / throughout construction period	Contractor	TMEIA		Y		✓
12.6	8.1	Standard formwork or pre-fabrication should be used as far as practicable so as to minimise the C&D materials arising. The use of more durable formwork/ plastic facing for construction works should be considered. The use of wooden hoardings should be avoided and metal hoarding should be used to facilitate recycling. Purchasing of construction materials should avoid over-ordering and wastage.	All areas / throughout construction period	Contractor	TMEIA		Y		✓
12.6	8.1	The Contractor should recycle as many C&D materials (this is a waste section) as possible on-site. The public fill and C&D waste should be segregated and stored in separate containers or skips to facilitate the reuse or recycling of materials and proper	All areas / throughout construction period	Contractor	TMEIA		Y		✓

CONTRACT NO. HY/2013/12

**TUEN MUN – CHECK LAP KOK LINK – NORTHERN CONNECTION TOLL PLAZA AND ASSOCIATED WORKS
ENVIRONMENTAL MITIGATION AND ENHANCEMENT MEASURE IMPLEMENTATION SCHEDULE**

		disposal. Where practicable, the concrete and masonry should be crushed and used as fill materials. Steel reinforcement bar should be collected for use by scrap steel mills. Different areas of the sites should be considered for segregation and storage activities.							
12.6	8.1	All falsework will be steel instead of wood.	All areas / throughout construction period	Contractor	TMEIA		Y		◇
12.6	8.1	Chemical waste producers should register with the EPD. Chemical waste should be handled in accordance with the Code of Practice on the Packaging, Handling and Storage of Chemical Wastes as follows: <ul style="list-style-type: none"> • suitable for the substance to be held, resistant to corrosion, maintained in good conditions and securely closed; • Having a capacity of <450L unless the specifications have been approved by the EPD; and • Displaying a label in English and Chinese according to the instructions prescribed in Schedule 2 of the Regulations. • Clearly labelled and used solely for the storage of chemical wastes; • Enclosed with at least 3 sides; • Impermeable floor and bund with capacity to accommodate 110% of the volume of the largest container or 20% by volume of the chemical waste stored in the area, whichever is greatest; • Adequate ventilation; • Sufficiently covered to prevent rainfall entering (water collected within the bund must be tested and disposed of as chemical waste, if necessary); and • Incompatible materials are adequately separated. 	All areas / throughout construction period	Contractor	TMEIA		Y		✓
12.6	8.1	Waste oils, chemicals or solvents shall not be	All areas / throughout	Contractor	TMEIA		Y		✓

CONTRACT NO. HY/2013/12

**TUEN MUN – CHECK LAP KOK LINK – NORTHERN CONNECTION TOLL PLAZA AND ASSOCIATED WORKS
ENVIRONMENTAL MITIGATION AND ENHANCEMENT MEASURE IMPLEMENTATION SCHEDULE**

		disposed of to drain,	construction period						
12.6	8.1	Adequate numbers of portable toilets should be provided for on-site workers. Portable toilets should be maintained in reasonable states, which will not deter the workers from utilising them.	All areas / throughout construction period	Contractor	TMEIA		Y		✓
12.6	8.1	Night soil should be regularly collected by licensed collectors.	All areas / throughout construction period	Contractor	TMEIA		Y		✓
12.6	8.1	General refuse arising on-site should be stored in enclosed bins or compaction units separately from C&D and chemical wastes. Sufficient dustbins shall be provided for storage of waste as required under the Public Cleansing and Prevention of Nuisances By-laws. In addition, general refuse shall be cleared daily and shall be disposed of to the nearest licensed landfill or refuse transfer station. Burning of refuse on construction sites is prohibited.	All areas / throughout construction period	Contractor	TMEIA		Y		✓
12.6	8.1	All waste containers shall be in a secure area on hardstanding;	All areas / throughout construction period	Contractor	TMEIA		Y		✓
12.6	8.1	Training shall be provided to workers about the concepts of site cleanliness and appropriate waste management procedure, including waste reduction, reuse and recycling.	All areas / throughout construction period	Contractor	TMEIA		Y		✓
12.6	8.1	Office wastes can be reduced by recycling of paper if such volume is sufficiently large to warrant collection. Participation in a local collection scheme by the Contractor should be advocated. Waste separation facilities for paper, aluminum cans, plastic bottles, etc should be provided on-site.	Site Offices/ throughout construction period	Contractor	TMEIA		Y		✓
12.6	Section 8	EM&A of waste handling, storage, transportation, disposal procedures and documentation through the site audit programme shall be undertaken.	All areas / throughout construction period	Contractor	EM&A Manual		Y		✓

Water Quality

EIA reference	EM&A Manual reference	Environmental Protection Measures	Location/ Timing	Implementation Agent	Relevant Standard or Requirement	Implementation Stages			Status
						D	C	O	

CONTRACT NO. HY/2013/12

**TUEN MUN – CHECK LAP KOK LINK – NORTHERN CONNECTION TOLL PLAZA AND ASSOCIATED WORKS
ENVIRONMENTAL MITIGATION AND ENHANCEMENT MEASURE IMPLEMENTATION SCHEDULE**

Land Works									
6.10	-	Wastewater from temporary site facilities should be controlled to prevent direct discharge to surface or marine waters.	All areas/ throughout construction period	Contractor	TM-EIAO		Y		◇
6.10	-	Sewage effluent and discharges from onsite kitchen facilities shall be directed to Government sewer in accordance with the Requirements of the WPCO or collected for disposal offsite. The use of soakaways shall be avoided.	All areas/ throughout construction period	Contractor	TM-EIAO		Y		✓
6.10	-	Storm drainage shall be directed to storm drains via adequately designed sand/silt removal facilities such as sand traps, silt traps and sediment basins. Channels, earth bunds or sand bag barriers should be provided on site to properly direct stormwater to such silt removal facilities. Catchpits and perimeter channels should be constructed in advance of site formation works and earthworks.	All areas/ throughout construction period	Contractor	TM-EIAO		Y		✓
6.10	-	Silt removal facilities, channels and manholes shall be maintained and any deposited silt and grit shall be removed regularly, including specifically at the onset of and after each rainstorm.	All areas/ throughout construction period	Contractor	TM-EIAO		Y		✓
6.10	-	Temporary access roads should be surfaced with crushed stone or gravel.	All areas/ throughout construction period	Contractor	TM-EIAO		Y		◇
6.10	-	Rainwater pumped out from trenches or foundation excavations should be discharged into storm drains via silt removal facilities.	All areas/ throughout construction period	Contractor	TM-EIAO		Y		◇
6.10	-	Measures should be taken to prevent the washout of construction materials, soil, silt or debris into any drainage system.	All areas/ throughout construction period	Contractor	TM-EIAO		Y		✓
6.10	-	Open stockpiles of construction materials (e.g. aggregates and sand) on site should be covered with tarpaulin or similar fabric during rainstorms.	All areas/ throughout construction period	Contractor	TM-EIAO		Y		◇
6.10	5.8	Manholes (including any newly constructed ones) should always be adequately covered and temporarily sealed so as to prevent silt, construction	All areas/ throughout construction period	Contractor	TM-EIAO		Y		◇

CONTRACT NO. HY/2013/12

**TUEN MUN – CHECK LAP KOK LINK – NORTHERN CONNECTION TOLL PLAZA AND ASSOCIATED WORKS
ENVIRONMENTAL MITIGATION AND ENHANCEMENT MEASURE IMPLEMENTATION SCHEDULE**

		materials or debris from getting into the drainage system, and to prevent storm run-off from getting into foul sewers.							
6.10	-	Discharges of surface run-off into foul sewers must always be prevented in order not to unduly overload the foul sewerage system.	All areas/ throughout construction period	Contractor	TM-EIAO		Y		✓
6.10	-	All vehicles and plant should be cleaned before they leave the construction site to ensure that no earth, mud or debris is deposited by them on roads. A wheel washing bay should be provided at every site exit.	All areas/ throughout construction period	Contractor	TM-EIAO		Y		✓
6.10	-	Section of construction road between the wheel washing bay and the public road should be surfaced with crushed stone or coarse gravel.	All areas/ throughout construction period	Contractor	TM-EIAO		Y		✓
6.10	-	Wastewater generated from concreting, plastering, internal decoration, cleaning work and other similar activities, shall be screened to remove large objects.	All areas/ throughout construction period	Contractor	TM-EIAO		Y		✓
6.10	-	Vehicle and plant servicing areas, vehicle wash bays and lubrication facilities shall be located under roofed areas. The drainage in these covered areas shall be connected to foul sewers via a petrol interceptor in accordance with the requirements of the WPCO or collected for off site disposal.	All areas/ throughout construction period	Contractor	TM-EIAO		Y		✓
6.10	-	The Contractor shall prepare an oil / chemical cleanup plan and ensure that leakages or spillages are contained and cleaned up immediately.	All areas/ throughout construction period	Contractor	TM-EIAO		Y		✓
6.10	-	Waste oil should be collected and stored for recycling or disposal, in accordance with the Waste Disposal Ordinance.	All areas/ throughout construction period	Contractor	TM-EIAO Waste Disposal Ordinance		Y		✓
6.10	-	All fuel tanks and chemical storage areas should be provided with locks and be sited on sealed areas. The storage areas should be surrounded by bunds with a capacity equal to 110% of the storage capacity of the largest tank.	All areas/ throughout construction period	Contractor	TM-EIAO		Y		◇

CONTRACT NO. HY/2013/12
TUEN MUN – CHECK LAP KOK LINK – NORTHERN CONNECTION TOLL PLAZA AND ASSOCIATED WORKS
ENVIRONMENTAL MITIGATION AND ENHANCEMENT MEASURE IMPLEMENTATION SCHEDULE

6.10	Section 5	All construction works shall be subject to routine audit to ensure implementation of all EIA recommendations and good working practice.	All areas/ throughout construction period	Contractor	EM&A Manual		Y		✓
------	-----------	---	---	------------	-------------	--	---	--	---

Remarks:

- ✓ Compliance of Mitigation Measures
- <> Compliance of Mitigation Measures but need improvement.
- × Non-compliance of Mitigation Measures
- ▲ Non-compliance of Mitigation Measures but rectified by Contractor
- △ Deficiency of Mitigation Measures but rectified by Contractor
- N/A Not Applicable in Reporting Period
- # Amended against condition 3.13 of EP-354/2009/C

Legend: D=Design, C=Construction, O=Operation

Note: Funding Agent for all mitigation measures will be the Highways Department of the Hong Kong SAR Government

Appendix N

Cumulative Statistics on Exceedance and Complaint

Table N-1 Statistical Summary of Environmental Exceedance

Reporting Period	Environmental Aspect / Parameter	Environmental Performance	Event Exceedance	
			Reporting Period	Cumulative since project commencement
June 2016	Air Quality – 1-hour TSP	Action Level	0	4
		Limit Level	0	0
	Air Quality – 24-hour TSP	Action Level	0	0
		Limit Level	0	0

Table N-2 Statistical Summary of Environmental Complaints

Reporting Period	Environmental Complaint Statistics				
	Frequency	Cumulative	Complaint Nature		
			Air	Noise	Water
June 2016	1	6	1	NA	6
Cumulative since project commencement	5	5	1	NA	4

Table N-3 Statistical Summary of Environmental Summons

Reporting Period	Environmental Summons Statistics				
	Frequency	Cumulative	Complaint Nature		
			Air	Noise	Water
June 2016	0	0	NA	NA	NA
Cumulative since project commencement	0	0	NA	NA	NA

Table N-4 Statistical Summary of Environmental Prosecution

Reporting Period	Environmental Prosecution Statistics				
	Frequency	Cumulative	Complaint Nature		
			Air	Noise	Water
June 2016	0	0	NA	NA	NA
Cumulative since project commencement	0	0	NA	NA	NA

Appendix O

Investigation Report for the Complaint

Contract No. HY/2013/12
Tuen Mun - Chek Lap Kok Link - Northern Connection Toll Plaza and Associated Works

Investigation Report on Action or Limit Level Non-compliance


Complaint Log No.	TCS00715/14/300/F0205
Received Date by ET	15 June 2016
Complaint Details	The complainant complained that white color effluent discharging outfall behind sawmill at Ho Yeung Street, Tuen Mun.
Complaint Location	Storm outfall of Ho Yeung Street, Tuen Mun
Date of Complaint	7 June 2016
Environmental Aspect	Milky water
Complainant	Unknown
Complaint Route	via EPD hotline
Investigation Result	<ol style="list-style-type: none"> 1 A complaint was received via EPD hotline on 7 June 2016, claimed that white color effluent discharging at storm outfall of No.33 Ho Yeung Street, Tuen Mun at around 18:00 and this is a follow up of the complaint EP/RW/0000368066 which received on 9 May 2016 and defecated as not project related complain. (Please refer to Location Map) 2 After received EPD verbal notification, the Contractor investigate the concerned drainage and confirmed that no water discharge at the concerned drainage as shown in location map. The nearest permitted discharge point (point 5 in the effluent discharge license) is currently not in use at this construction stage. (Photo 1) 3 Also EPD visit the upstream area and open the cover of manhole at Ho Fuk Street on 21 June 2016. No water discharge was observed and the manhole was clean and dry in condition. During the joint investigation and inspection by EPD, Aecom and the Contractor, it was found that the white water might came from other facilities or site located at Ho Yeung Street which is not related to this project. (Photo 2 & 3) 4 For the above result, the complaint was concluded invalid and not related to the project. 5 Although the complaint is concluded not project related, in order to prevent any incident for any possible muddy water entering the concerned drainage system, the Contractor has plugged the inlet of manhole SCH1008705 to ensure no water would be flow into the concerned drainage in later stage. (Photo 1) 6 In the previous complain, the Contractor commits to clean the concerned drainage location along Ho Fuk Street and Ho Fat Lane and EPD recommended the Contractor to carry out further cleansing works to the drainage pipe at Ho Yeung Street. The cleansing work at Ho Yeung Street was completed on 16 June 2016. (Photo 4 to 6)

Prepared By : T.W. Tam

Designation : Environmental Team Leader

Signature : 

Date : 29 June 2016

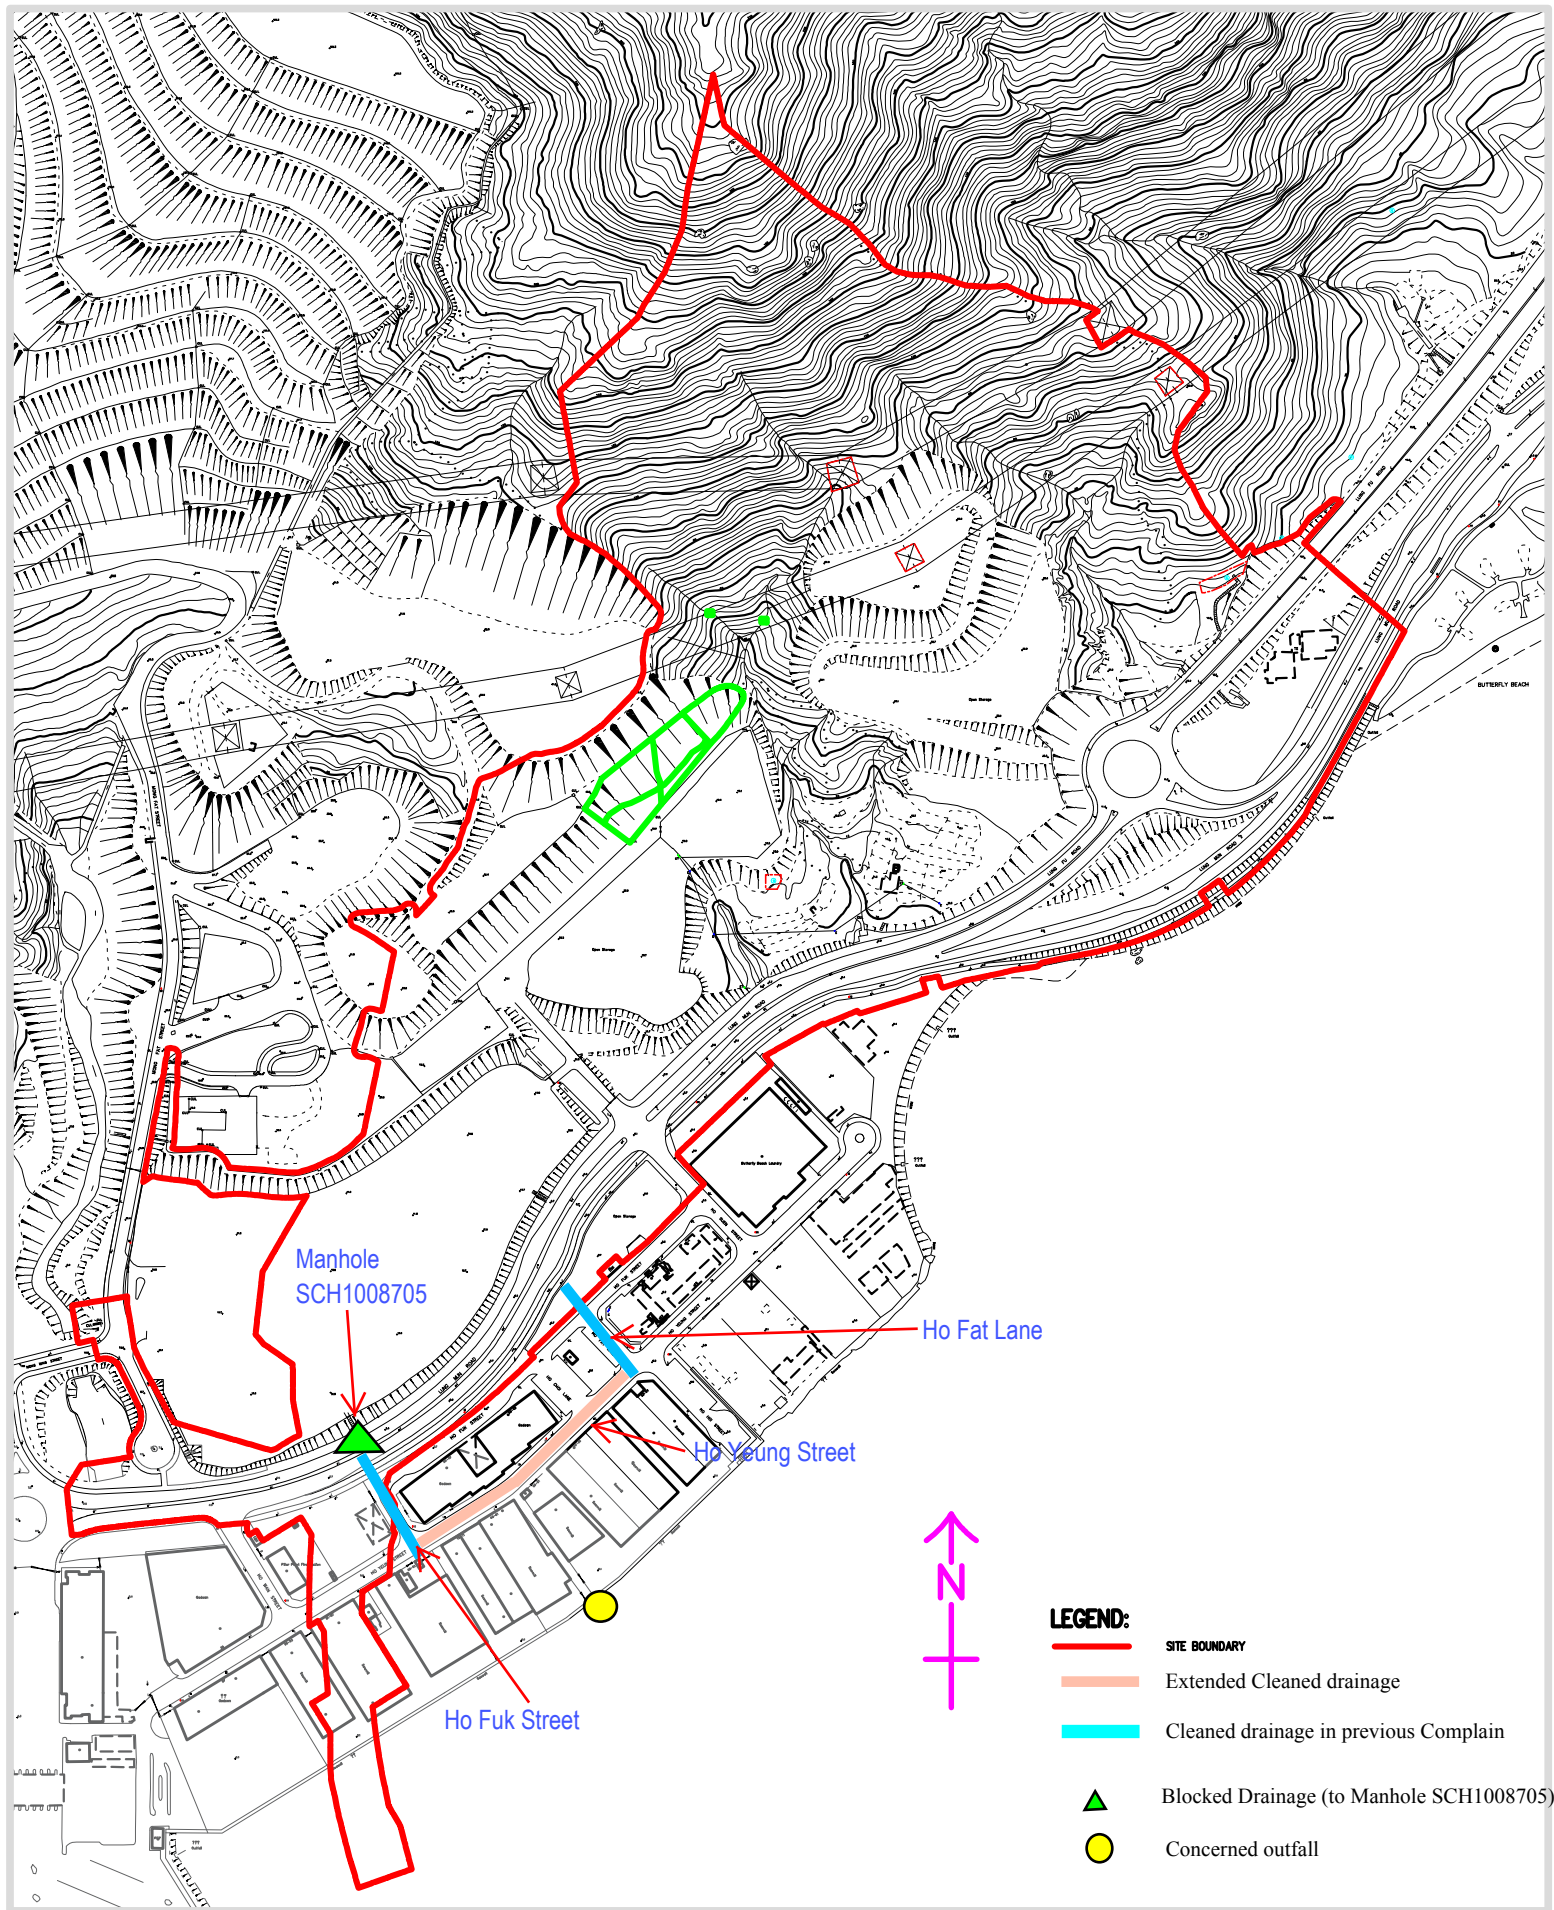

LEGEND:

- SITE BOUNDARY
- Extended Cleaned drainage
- Cleaned drainage in previous Complain
- ▲ Blocked Drainage (to Manhole SCH1008705)
- Concerned outfall

Location Map

Photo Record



Photo 1
Adjacent area of manhole SCH1008705.



Photo 2
EPD inspecting wastewater treatment facilities near concerned manhole on 21 June 2016.



Photo 3
EPD collect sludge sample from the wastewater treatment facilities near concerned manhole water entering.



Photo 4
Drainage cleansing works for Ho Yeung Street.



Photo 5
CCTV drainage survey at Ho Yeung Street.



Photo 6
CCTV drainage survey at Ho Yeung Street.

Appendix P

**Inspection Checklist for
Vulnerable to Contaminated Water Discharge**



中國路橋
CRBC

Kaden

基利

Contract No. HY/2013/12

Tuen Mun - Chek Lap Kok Link Northern Connection Toll Plaza and Associated Works

Inspection Checklist for vulnerable to contaminated water discharge

Inspection Date: 2016-06-01

Location: Stream B, Outfall 1

Name of Inspector: Melody Tong

Position of Inspector: ES

Please put a tick on the appropriate box.

Item Description		Y	P	N	Remarks
1	Exposed slope protected?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2	Adequacy of wastewater treatment facilities provided?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3	Sandbags provided at each step and top of side walls?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4	Is silt screen maintained in good condition?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
5	Remove debris, grit and silt inside the drainage system?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
6	Contaminated water discharge at discharge point / drainage inlet avoided?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
7	General housekeeping / site tidiness in good condition?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

Checked by : (CKJV) HY Tang 

Inspection Date: 2016-06-01

Legends: Y = Yes, P = Partial, N = No

Daily Drainage Inspection Record

Inspection Date: 01-June-2016



Stream B Outfall: clean water is discharging.



Outfall 1: Clean water is discharging.



Contract No. HY/2013/12
 Tuen Mun - Chek Lap Kok Link Northern Connection Toll Plaza
 and Associated Works

Inspection Checklist for vulnerable to contaminated water discharge

Inspection Date: 2016-06-02 Location: Stream B, Outfall 1
 Name of Inspector: Melody Tong Position of Inspector: ES

Please put a tick \checkmark on the appropriate box.

Item Description		Y	P	N	Remarks
1	Exposed slope protected?	\checkmark			
2	Adequacy of wastewater treatment facilities provided?	\checkmark			
3	Sandbags provided at each step and top of side walls?	\checkmark			
4	Is silt screen maintained in good condition?	\checkmark			
5	Remove debris, grit and silt inside the drainage system?	\checkmark			
6	Contaminated water discharge at discharge point / drainage inlet avoided?	\checkmark			
7	General housekeeping / site tidiness in good condition?	\checkmark			

Checked by : (CKJV) HY Tang  Inspection Date: 2016-06-02

Legends: Y = Yes, P = Partial, N = No

Daily Drainage Inspection Record

Inspection Date: 02-June-2016



Stream B Outfall: clean water is discharging.



Outfall 1: Clean water is discharging.



Contract No. HY/2013/12
Tuen Mun - Chek Lap Kok Link Northern Connection Toll Plaza and Associated Works

Inspection Checklist for vulnerable to contaminated water discharge

Inspection Date: 2016-06-03 Location: Stream B, Outfall 1
Name of Inspector: Melody Tong Position of Inspector: ES

Please put a tick \checkmark on the appropriate box.

Item Description		Y	P	N	Remarks
1	Exposed slope protected?	\checkmark			
2	Adequacy of wastewater treatment facilities provided?	\checkmark			
3	Sandbags provided at each step and top of side walls?	\checkmark			
4	Is silt screen maintained in good condition?	\checkmark			
5	Remove debris, grit and silt inside the drainage system?	\checkmark			
6	Contaminated water discharge at discharge point / drainage inlet avoided?	\checkmark			
7	General housekeeping / site tidiness in good condition?	\checkmark			

Checked by : (CKJV) HY Tang  Inspection Date: 2016-06-03

Legends: Y = Yes, P = Partial, N = No

Daily Drainage Inspection Record

Inspection Date: 03-June-2016



Stream B Outfall: clean water is discharging.



Outfall 1: Clean water is discharging.



Contract No. HY/2013/12
 Tuen Mun - Chek Lap Kok Link Northern Connection Toll Plaza
 and Associated Works

Inspection Checklist for vulnerable to contaminated water discharge

Inspection Date: 2016-06-04 Location: Stream B, Outfall 1
 Name of Inspector: Melody Tong Position of Inspector: ES

Please put a tick \checkmark on the appropriate box.

Item Description		Y	P	N	Remarks
1	Exposed slope protected?	\checkmark			
2	Adequacy of wastewater treatment facilities provided?	\checkmark			
3	Sandbags provided at each step and top of side walls?	\checkmark			
4	Is silt screen maintained in good condition?	\checkmark			
5	Remove debris, grit and silt inside the drainage system?	\checkmark			
6	Contaminated water discharge at discharge point / drainage inlet avoided?	\checkmark			
7	General housekeeping / site tidiness in good condition?	\checkmark			

Checked by : (CKJV) HY Tang  Inspection Date: 2016-06-04

Legends: Y = Yes, P = Partial, N = No

Daily Drainage Inspection Record

Inspection Date: 04-June-2016



Stream B Outfall: clean water is discharging.



Outfall 1: Clean water is discharging.



Contract No. HY/2013/12
 Tuen Mun - Chek Lap Kok Link Northern Connection Toll Plaza
 and Associated Works

Inspection Checklist for vulnerable to contaminated water discharge

Inspection Date: 2016-06-06 Location: Stream B, Outfall 1
 Name of Inspector: Melody Tong Position of Inspector: ES

Please put a tick on the appropriate box.

Item Description		Y	P	N	Remarks
1	Exposed slope protected?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2	Adequacy of wastewater treatment facilities provided?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3	Sandbags provided at each step and top of side walls?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4	Is silt screen maintained in good condition?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
5	Remove debris, grit and silt inside the drainage system?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
6	Contaminated water discharge at discharge point / drainage inlet avoided?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
7	General housekeeping / site tidiness in good condition?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

Checked by : (CKJV) HY Tang  Inspection Date: 2016-06-06

Legends: Y = Yes, P = Partial, N = No

Daily Drainage Inspection Record

Inspection Date: 06-June-2016



Stream B Outfall: clean water is discharging.



Outfall 1: Clean water is discharging.



Contract No. HY/2013/12
 Tuen Mun - Chek Lap Kok Link Northern Connection Toll Plaza
 and Associated Works

Inspection Checklist for vulnerable to contaminated water discharge

Inspection Date: 2016-06-07 Location: Stream B, Outfall 1
 Name of Inspector: Melody Tong Position of Inspector: ES

Please put a tick \checkmark on the appropriate box.

Item Description		Y	P	N	Remarks
1	Exposed slope protected?	\checkmark			
2	Adequacy of wastewater treatment facilities provided?	\checkmark			
3	Sandbags provided at each step and top of side walls?	\checkmark			
4	Is silt screen maintained in good condition?	\checkmark			
5	Remove debris, grit and silt inside the drainage system?	\checkmark			
6	Contaminated water discharge at discharge point / drainage inlet avoided?	\checkmark			
7	General housekeeping / site tidiness in good condition?	\checkmark			

Checked by : (CKJV) HY Tang  Inspection Date: 2016-06-07

Legends: Y = Yes, P = Partial, N = No

Daily Drainage Inspection Record

Inspection Date: 07-June-2016



Stream B Outfall: clean water is discharging.



Outfall 1: Clean water is discharging.



Contract No. HY/2013/12
 Tuen Mun - Chek Lap Kok Link Northern Connection Toll Plaza
 and Associated Works

Inspection Checklist for vulnerable to contaminated water discharge

Inspection Date: 2016-06-08 Location: Stream B, Outfall 1
 Name of Inspector: Melody Tong Position of Inspector: ES

Please put a tick \checkmark on the appropriate box.

Item Description		Y	P	N	Remarks
1	Exposed slope protected?	\checkmark			
2	Adequacy of wastewater treatment facilities provided?	\checkmark			
3	Sandbags provided at each step and top of side walls?	\checkmark			
4	Is silt screen maintained in good condition?	\checkmark			
5	Remove debris, grit and silt inside the drainage system?	\checkmark			
6	Contaminated water discharge at discharge point / drainage inlet avoided?	\checkmark			
7	General housekeeping / site tidiness in good condition?	\checkmark			

Checked by : (CKJV) HY Tang  Inspection Date: 2016-06-08

Legends: Y = Yes, P = Partial, N = No

Daily Drainage Inspection Record

Inspection Date: 08-June-2016



Stream B Outfall: clean water is discharging.



Outfall 1: Clean water is discharging.



Contract No. HY/2013/12
 Tuen Mun - Chek Lap Kok Link Northern Connection Toll Plaza
 and Associated Works

Inspection Checklist for vulnerable to contaminated water discharge

Inspection Date: 2016-06-10 Location: Stream B, Outfall 1
 Name of Inspector: Melody Tong Position of Inspector: ES

Please put a tick \checkmark on the appropriate box.

Item Description		Y	P	N	Remarks
1	Exposed slope protected?	\checkmark			
2	Adequacy of wastewater treatment facilities provided?	\checkmark			
3	Sandbags provided at each step and top of side walls?	\checkmark			
4	Is silt screen maintained in good condition?	\checkmark			
5	Remove debris, grit and silt inside the drainage system?	\checkmark			
6	Contaminated water discharge at discharge point / drainage inlet avoided?	\checkmark			
7	General housekeeping / site tidiness in good condition?	\checkmark			

Checked by : (CKJV) HY Tang  Inspection Date: 2016-06-10

Legends: Y = Yes, P = Partial, N = No

Daily Drainage Inspection Record

Inspection Date: 10-June-2016



Stream B Outfall: clean water is discharging.



Outfall 1: Clean water is discharging.



Contract No. HY/2013/12
Tuen Mun - Chek Lap Kok Link Northern Connection Toll Plaza and Associated Works

Inspection Checklist for vulnerable to contaminated water discharge

Inspection Date: 2016-06-11 Location: Stream B, Outfall 1
Name of Inspector: Melody Tong Position of Inspector: ES

Please put a tick \checkmark on the appropriate box.

Item Description		Y	P	N	Remarks
1	Exposed slope protected?	\checkmark			
2	Adequacy of wastewater treatment facilities provided?	\checkmark			
3	Sandbags provided at each step and top of side walls?	\checkmark			
4	Is silt screen maintained in good condition?	\checkmark			
5	Remove debris, grit and silt inside the drainage system?	\checkmark			
6	Contaminated water discharge at discharge point / drainage inlet avoided?	\checkmark			
7	General housekeeping / site tidiness in good condition?	\checkmark			

Checked by : (CKJV) HY Tang  Inspection Date: 2016-06-11

Legends: Y = Yes, P = Partial, N = No

Daily Drainage Inspection Record

Inspection Date: 11-June-2016



Stream B Outfall: clean water is discharging.



Outfall 1: Clean water is discharging.



Contract No. HY/2013/12
 Tuen Mun - Chek Lap Kok Link Northern Connection Toll Plaza
 and Associated Works

Inspection Checklist for vulnerable to contaminated water discharge

Inspection Date: 2016-06-13 Location: Stream B, Outfall 1
 Name of Inspector: Melody Tong Position of Inspector: ES

Please put a tick \checkmark on the appropriate box.

Item Description		Y	P	N	Remarks
1	Exposed slope protected?	\checkmark			
2	Adequacy of wastewater treatment facilities provided?	\checkmark			
3	Sandbags provided at each step and top of side walls?	\checkmark			
4	Is silt screen maintained in good condition?	\checkmark			
5	Remove debris, grit and silt inside the drainage system?	\checkmark			
6	Contaminated water discharge at discharge point / drainage inlet avoided?	\checkmark			
7	General housekeeping / site tidiness in good condition?	\checkmark			

Checked by : (CKJV) HY Tang  Inspection Date: 2016-06-13

Legends: Y = Yes, P = Partial, N = No

Daily Drainage Inspection Record

Inspection Date: 13-June-2016



Stream B Outfall: clean water is discharging.



Outfall 1: Clean water is discharging.



Contract No. HY/2013/12
 Tuen Mun - Chek Lap Kok Link Northern Connection Toll Plaza
 and Associated Works

Inspection Checklist for vulnerable to contaminated water discharge

Inspection Date: 2016-06-14 Location: Stream B, Outfall 1
 Name of Inspector: Melody Tong Position of Inspector: ES

Please put a tick \checkmark on the appropriate box.

Item Description		Y	P	N	Remarks
1	Exposed slope protected?	\checkmark			
2	Adequacy of wastewater treatment facilities provided?	\checkmark			
3	Sandbags provided at each step and top of side walls?	\checkmark			
4	Is silt screen maintained in good condition?	\checkmark			
5	Remove debris, grit and silt inside the drainage system?	\checkmark			
6	Contaminated water discharge at discharge point / drainage inlet avoided?	\checkmark			
7	General housekeeping / site tidiness in good condition?	\checkmark			

Checked by : (CKJV) HY Tang  Inspection Date: 2016-06-14

Legends: Y = Yes, P = Partial, N = No

Daily Drainage Inspection Record

Inspection Date: 14-June-2016



Stream B Outfall: clean water is discharging.



Outfall 1: Clean water is discharging.



Contract No. HY/2013/12
 Tuen Mun - Chek Lap Kok Link Northern Connection Toll Plaza
 and Associated Works

Inspection Checklist for vulnerable to contaminated water discharge

Inspection Date: 2016-06-15 Location: Stream B, Outfall 1
 Name of Inspector: Melody Tong Position of Inspector: ES

Please put a tick \checkmark on the appropriate box.

Item Description		Y	P	N	Remarks
1	Exposed slope protected?	\checkmark			
2	Adequacy of wastewater treatment facilities provided?	\checkmark			
3	Sandbags provided at each step and top of side walls?	\checkmark			
4	Is silt screen maintained in good condition?	\checkmark			
5	Remove debris, grit and silt inside the drainage system?	\checkmark			
6	Contaminated water discharge at discharge point / drainage inlet avoided?	\checkmark			
7	General housekeeping / site tidiness in good condition?	\checkmark			

Checked by : (CKJV) HY Tang  Inspection Date: 2016-06-15

Legends: Y = Yes, P = Partial, N = No

Daily Drainage Inspection Record

Inspection Date: 15-June-2016



Stream B Outfall: clean water is discharging.



Outfall 1: Clean water is discharging.



Contract No. HY/2013/12
 Tuen Mun - Chek Lap Kok Link Northern Connection Toll Plaza
 and Associated Works

Inspection Checklist for vulnerable to contaminated water discharge

Inspection Date: 2016-06-16 Location: Stream B, Outfall 1
 Name of Inspector: Melody Tong Position of Inspector: ES

Please put a tick on the appropriate box.

Item Description		Y	P	N	Remarks
1	Exposed slope protected?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2	Adequacy of wastewater treatment facilities provided?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3	Sandbags provided at each step and top of side walls?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4	Is silt screen maintained in good condition?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
5	Remove debris, grit and silt inside the drainage system?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
6	Contaminated water discharge at discharge point / drainage inlet avoided?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
7	General housekeeping / site tidiness in good condition?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

Checked by : (CKJV) HY Tang  Inspection Date: 2016-06-16

Legends: Y = Yes, P = Partial, N = No

Daily Drainage Inspection Record

Inspection Date: 16-June-2016



Stream B Outfall: clean water is discharging.



Outfall 1: Clean water is discharging.



Contract No. HY/2013/12
 Tuen Mun - Chek Lap Kok Link Northern Connection Toll Plaza
 and Associated Works

Inspection Checklist for vulnerable to contaminated water discharge

Inspection Date: 2016-06-17 Location: Stream B, Outfall 1
 Name of Inspector: Melody Tong Position of Inspector: ES

Please put a tick \checkmark on the appropriate box.

Item Description		Y	P	N	Remarks
1	Exposed slope protected?	\checkmark			
2	Adequacy of wastewater treatment facilities provided?	\checkmark			
3	Sandbags provided at each step and top of side walls?	\checkmark			
4	Is silt screen maintained in good condition?	\checkmark			
5	Remove debris, grit and silt inside the drainage system?	\checkmark			
6	Contaminated water discharge at discharge point / drainage inlet avoided?	\checkmark			
7	General housekeeping / site tidiness in good condition?	\checkmark			

Checked by : (CKJV) HY Tang  Inspection Date: 2016-06-17

Legends: Y = Yes, P = Partial, N = No

Daily Drainage Inspection Record

Inspection Date: 17-June-2016



Stream B Outfall: clean water is discharging.



Outfall 1: Clean water is discharging.



Contract No. HY/2013/12
 Tuen Mun - Chek Lap Kok Link Northern Connection Toll Plaza
 and Associated Works

Inspection Checklist for vulnerable to contaminated water discharge

Inspection Date: 2016-06-18 Location: Stream B, Outfall 1
 Name of Inspector: Melody Tong Position of Inspector: ES

Please put a tick \checkmark on the appropriate box.

Item Description		Y	P	N	Remarks
1	Exposed slope protected?	\checkmark			
2	Adequacy of wastewater treatment facilities provided?	\checkmark			
3	Sandbags provided at each step and top of side walls?	\checkmark			
4	Is silt screen maintained in good condition?	\checkmark			
5	Remove debris, grit and silt inside the drainage system?	\checkmark			
6	Contaminated water discharge at discharge point / drainage inlet avoided?	\checkmark			
7	General housekeeping / site tidiness in good condition?	\checkmark			

Checked by : (CKJV) HY Tang  Inspection Date: 2016-06-18

Legends: Y = Yes, P = Partial, N = No

Daily Drainage Inspection Record

Inspection Date: 18-June-2016



Stream B Outfall: clean water is discharging.



Outfall 1: Clean water is discharging.



Contract No. HY/2013/12
 Tuen Mun - Chek Lap Kok Link Northern Connection Toll Plaza
 and Associated Works

Inspection Checklist for vulnerable to contaminated water discharge

Inspection Date: 2016-06-20 Location: Stream B, Outfall 1
 Name of Inspector: Melody Tong Position of Inspector: ES

Please put a tick \checkmark on the appropriate box.

Item Description		Y	P	N	Remarks
1	Exposed slope protected?	\checkmark			
2	Adequacy of wastewater treatment facilities provided?	\checkmark			
3	Sandbags provided at each step and top of side walls?	\checkmark			
4	Is silt screen maintained in good condition?	\checkmark			
5	Remove debris, grit and silt inside the drainage system?	\checkmark			
6	Contaminated water discharge at discharge point / drainage inlet avoided?	\checkmark			
7	General housekeeping / site tidiness in good condition?	\checkmark			

Checked by : (CKJV) HY Tang  Inspection Date: 2016-06-20

Legends: Y = Yes, P = Partial, N = No

Daily Drainage Inspection Record

Inspection Date: 20-June-2016



Stream B Outfall: clean water is discharging.



Outfall 1: Clean water is discharging.



Contract No. HY/2013/12
 Tuen Mun - Chek Lap Kok Link Northern Connection Toll Plaza
 and Associated Works

Inspection Checklist for vulnerable to contaminated water discharge

Inspection Date: 2016-06-21 Location: Stream B, Outfall 1
 Name of Inspector: Melody Tong Position of Inspector: ES

Please put a tick on the appropriate box.

Item Description		Y	P	N	Remarks
1	Exposed slope protected?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2	Adequacy of wastewater treatment facilities provided?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3	Sandbags provided at each step and top of side walls?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4	Is silt screen maintained in good condition?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
5	Remove debris, grit and silt inside the drainage system?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
6	Contaminated water discharge at discharge point / drainage inlet avoided?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
7	General housekeeping / site tidiness in good condition?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

Checked by : (CKJV) HY Tang  Inspection Date: 2016-06-21

Legends: Y = Yes, P = Partial, N = No

Daily Drainage Inspection Record

Inspection Date: 21-June-2016



Stream B Outfall: clean water is discharging.



Outfall 1: Clean water is discharging.



Contract No. HY/2013/12
 Tuen Mun - Chek Lap Kok Link Northern Connection Toll Plaza
 and Associated Works

Inspection Checklist for vulnerable to contaminated water discharge

Inspection Date: 2016-06-22 Location: Stream B, Outfall 1
 Name of Inspector: Melody Tong Position of Inspector: ES

Please put a tick \checkmark on the appropriate box.

Item Description		Y	P	N	Remarks
1	Exposed slope protected?	\checkmark			
2	Adequacy of wastewater treatment facilities provided?	\checkmark			
3	Sandbags provided at each step and top of side walls?	\checkmark			
4	Is silt screen maintained in good condition?	\checkmark			
5	Remove debris, grit and silt inside the drainage system?	\checkmark			
6	Contaminated water discharge at discharge point / drainage inlet avoided?	\checkmark			
7	General housekeeping / site tidiness in good condition?	\checkmark			

Checked by : (CKJV) HY Tang  Inspection Date: 2016-06-22

Legends: Y = Yes, P = Partial, N = No

Daily Drainage Inspection Record

Inspection Date: 22-June-2016



Stream B Outfall: clean water is discharging.



Outfall 1: Clean water is discharging.



Contract No. HY/2013/12
 Tuen Mun - Chek Lap Kok Link Northern Connection Toll Plaza
 and Associated Works

Inspection Checklist for vulnerable to contaminated water discharge

Inspection Date: 2016-06-23 Location: Stream B, Outfall 1
 Name of Inspector: Melody Tong Position of Inspector: ES

Please put a tick \checkmark on the appropriate box.

Item Description		Y	P	N	Remarks
1	Exposed slope protected?	\checkmark			
2	Adequacy of wastewater treatment facilities provided?	\checkmark			
3	Sandbags provided at each step and top of side walls?	\checkmark			
4	Is silt screen maintained in good condition?	\checkmark			
5	Remove debris, grit and silt inside the drainage system?	\checkmark			
6	Contaminated water discharge at discharge point / drainage inlet avoided?	\checkmark			
7	General housekeeping / site tidiness in good condition?	\checkmark			

Checked by : (CKJV) HY Tang  Inspection Date: 2016-06-23

Legends: Y = Yes, P = Partial, N = No

Daily Drainage Inspection Record

Inspection Date: 23-June-2016



Stream B Outfall: clean water is discharging.



Outfall 1: Clean water is discharging.



Contract No. HY/2013/12
 Tuen Mun - Chek Lap Kok Link Northern Connection Toll Plaza
 and Associated Works

Inspection Checklist for vulnerable to contaminated water discharge

Inspection Date: 2016-06-24 Location: Stream B, Outfall 1
 Name of Inspector: Melody Tong Position of Inspector: ES

Please put a tick \checkmark on the appropriate box.

Item Description		Y	P	N	Remarks
1	Exposed slope protected?	\checkmark			
2	Adequacy of wastewater treatment facilities provided?	\checkmark			
3	Sandbags provided at each step and top of side walls?	\checkmark			
4	Is silt screen maintained in good condition?	\checkmark			
5	Remove debris, grit and silt inside the drainage system?	\checkmark			
6	Contaminated water discharge at discharge point / drainage inlet avoided?	\checkmark			
7	General housekeeping / site tidiness in good condition?	\checkmark			

Checked by : (CKJV) HY Tang  Inspection Date: 2016-06-24

Legends: Y = Yes, P = Partial, N = No

Daily Drainage Inspection Record

Inspection Date: 24-June-2016



Stream B Outfall: clean water is discharging.



Outfall 1: Clean water is discharging.



Contract No. HY/2013/12
 Tuen Mun - Chek Lap Kok Link Northern Connection Toll Plaza
 and Associated Works

Inspection Checklist for vulnerable to contaminated water discharge

Inspection Date: 2016-06-25 Location: Stream B, Outfall 1
 Name of Inspector: Melody Tong Position of Inspector: ES

Please put a tick \checkmark on the appropriate box.

Item Description		Y	P	N	Remarks
1	Exposed slope protected?	\checkmark			
2	Adequacy of wastewater treatment facilities provided?	\checkmark			
3	Sandbags provided at each step and top of side walls?	\checkmark			
4	Is silt screen maintained in good condition?	\checkmark			
5	Remove debris, grit and silt inside the drainage system?	\checkmark			
6	Contaminated water discharge at discharge point / drainage inlet avoided?	\checkmark			
7	General housekeeping / site tidiness in good condition?	\checkmark			

Checked by : (CKJV) HY Tang  Inspection Date: 2016-06-25

Legends: Y = Yes, P = Partial, N = No

Daily Drainage Inspection Record

Inspection Date: 25-June-2016



Stream B Outfall: clean water is discharging.



Outfall 1: Clean water is discharging.



Contract No. HY/2013/12
 Tuen Mun - Chek Lap Kok Link Northern Connection Toll Plaza
 and Associated Works

Inspection Checklist for vulnerable to contaminated water discharge

Inspection Date: 2016-06-27 Location: Stream B, Outfall 1
 Name of Inspector: Melody Tong Position of Inspector: ES

Please put a tick \checkmark on the appropriate box.

Item Description		Y	P	N	Remarks
1	Exposed slope protected?	\checkmark			
2	Adequacy of wastewater treatment facilities provided?	\checkmark			
3	Sandbags provided at each step and top of side walls?	\checkmark			
4	Is silt screen maintained in good condition?	\checkmark			
5	Remove debris, grit and silt inside the drainage system?	\checkmark			
6	Contaminated water discharge at discharge point / drainage inlet avoided?	\checkmark			
7	General housekeeping / site tidiness in good condition?	\checkmark			

Checked by : (CKJV) HY Tang  Inspection Date: 2016-06-27

Legends: Y = Yes, P = Partial, N = No

Daily Drainage Inspection Record

Inspection Date: 27-June-2016



Stream B Outfall: clean water is discharging.



Outfall 1: Clean water is discharging.



Contract No. HY/2013/12
 Tuen Mun - Chek Lap Kok Link Northern Connection Toll Plaza
 and Associated Works

Inspection Checklist for vulnerable to contaminated water discharge

Inspection Date: 2016-06-28 Location: Stream B, Outfall 1
 Name of Inspector: Melody Tong Position of Inspector: ES

Please put a tick \checkmark on the appropriate box.

Item Description		Y	P	N	Remarks
1	Exposed slope protected?	\checkmark			
2	Adequacy of wastewater treatment facilities provided?	\checkmark			
3	Sandbags provided at each step and top of side walls?	\checkmark			
4	Is silt screen maintained in good condition?	\checkmark			
5	Remove debris, grit and silt inside the drainage system?	\checkmark			
6	Contaminated water discharge at discharge point / drainage inlet avoided?	\checkmark			
7	General housekeeping / site tidiness in good condition?	\checkmark			

Checked by : (CKJV) HY Tang  Inspection Date: 2016-06-28

Legends: Y = Yes, P = Partial, N = No

Daily Drainage Inspection Record

Inspection Date: 28-June-2016



Stream B Outfall: clean water is discharging.



Outfall 1: Clean water is discharging.



中國路橋
CRBC

Kaden

基利

Contract No. HY/2013/12

Tuen Mun - Chek Lap Kok Link Northern Connection Toll Plaza and Associated Works

Inspection Checklist for vulnerable to contaminated water discharge

Inspection Date: 2016-06-29


Location: Stream B, Outfall 1

Name of Inspector: Melody Tong

Position of Inspector: ES

Please put a tick \checkmark on the appropriate box.

Item Description		Y	P	N	Remarks
1	Exposed slope protected?	\checkmark			
2	Adequacy of wastewater treatment facilities provided?	\checkmark			
3	Sandbags provided at each step and top of side walls?	\checkmark			
4	Is silt screen maintained in good condition?	\checkmark			
5	Remove debris, grit and silt inside the drainage system?	\checkmark			
6	Contaminated water discharge at discharge point / drainage inlet avoided?	\checkmark			
7	General housekeeping / site tidiness in good condition?	\checkmark			

Checked by : (CKJV) HY Tang 

Inspection Date: 2016-06-29

Legends: Y = Yes, P = Partial, N = No

Daily Drainage Inspection Record

Inspection Date: 29-June-2016



Stream B Outfall: clean water is discharging.



Outfall 1: Clean water is discharging.



Contract No. HY/2013/12
 Tuen Mun - Chek Lap Kok Link Northern Connection Toll Plaza
 and Associated Works

Inspection Checklist for vulnerable to contaminated water discharge

Inspection Date: 2016-06-30 Location: Stream B, Outfall 1
 Name of Inspector: Melody Tong Position of Inspector: ES

Please put a tick \checkmark on the appropriate box.

Item Description		Y	P	N	Remarks
1	Exposed slope protected?	\checkmark			
2	Adequacy of wastewater treatment facilities provided?	\checkmark			
3	Sandbags provided at each step and top of side walls?	\checkmark			
4	Is silt screen maintained in good condition?	\checkmark			
5	Remove debris, grit and silt inside the drainage system?	\checkmark			
6	Contaminated water discharge at discharge point / drainage inlet avoided?	\checkmark			
7	General housekeeping / site tidiness in good condition?	\checkmark			

Checked by : (CKJV) HY Tang  Inspection Date: 2016-06-30

Legends: Y = Yes, P = Partial, N = No

Daily Drainage Inspection Record

Inspection Date: 30-June-2016



Stream B Outfall: clean water is discharging.



Outfall 1: Clean water is discharging.