

**Contract No. : EP/SP/52/06**  
**Development of EcoPark in Tuen Mun Area 38**

**ENVIRONMENTAL MONITORING AND AUDIT**

**MONTHLY EM&A REPORT for**

**May 2010**

**Environmental Pioneers & Solutions Limited**  
8/F, Chaiwan Industrial Centre Building  
20 Lee Chung Street, Chaiwan, Hong Kong  
Tel: 2889 0569 Fax: 2856 2010

## **APPROVAL SHEET**

DOCUMENT DATE: 4 June 2010

Prepared and Certified by: ET Leader (Environmental Pioneers & Solutions Limited)

Signature: \_\_\_\_\_  
Miss Patricia Chung

Date: \_\_\_\_\_

Verified by: \_\_\_\_\_  
IEC\*

Date: \_\_\_\_\_

\* IEC – Independent Environmental Checker

**TABLE OF CONTENTS**

EXECUTIVE SUMMARY .....	4
1. BASIC PROJECT INFORMATION .....	5
2. SUMMARY OF WORK ACTIVITIES AND CONSTRUCTION STATUS.....	7
3. STATUS OF ENVIRONMENTAL PROTECTION AND SITE INSPECTIONS....	9
4. SUMMARY OF ENVIRONMENTAL PERMIT AND LICENCES .....	15
5. CUMULATIVE LOG OF COMPLAINTS AND REMEDIAL ACTION .....	15
6. CUMULATIVE LOG OF NOTIFICATION OF SUMMONS AND PROSECUTIONS .....	15
7. CONCLUSION .....	16
APPENDIX 1 - SITE LAYOUT PLAN.....	17
APPENDIX 2 - THE CONTACT PERSONS, TELEPHONE NUMBERS OF KEY PERSONNEL FOR DEVELOPMENT OF ECOPARK IN TUEN MUN AREA 38 .....	18
APPENDIX 3 – REVISED SITE LAYOUT PLAN FOR REFUSE COLLECTION POINTS.....	19
APPENDIX 4 – CUMULATIVE LOG OF COMPLAINTS .....	20

## **EXECUTIVE SUMMARY**

This is the forty-seventh monthly Environmental Monitoring and Audit (EM&A) Report for the Environmental Protection Department Contract No. EP/SP/52/06 entitled “Development of EcoPark in Tuen Mun Area 38”. (Environmental Permit No. EP-226/2005/A).

This report contains the results and findings of site inspection activities and EM&A works carried out by the Environmental Team (ET) of the Works Contractor as required in the contract during May 2010.

The site activities in the reporting period mainly consisted of excavation and site formation works and construction of drainage in Phase II construction site.

Several environmental issues, such as the housekeeping issues and dust and soil were spread over Roads A, B and D, have been identified by ET during weekly site inspections in the reporting month. Contractor has implemented some mitigation measures to address those problems as advised by ET. Some of the measures taken by the contractor were considered as effective to minimize negative impact to the environment. On-going investigation will be carried out to observe performance and effectiveness of those measures. Outstanding environmental items will be inspected in the following month.

There was no LFG monitoring required as all excavation pits are filled since February 2010.

There were no notifications of summons or successful prosecution during May 2010.

Planned activities for June 2010 with regard to development of Ecopark consist of:

- 1) Site formation works, and
- 2) Road formation works.

## **1. BASIC PROJECT INFORMATION**

### **1.1 Introduction**

This is the forty-seventh monthly Environmental Monitoring and Audit (EM&A) Report for the Environmental Protection Department Contract No. EP/SP/52/06 entitled “Development of EcoPark in Tuen Mun Area 38”. The site layout plan is shown in Appendix 1. The report was prepared by the Environmental Team, Environmental Pioneers & Solutions Limited, of the Works Contractor, Kaden Construction Limited. The report is to be submitted to the Works Contractor, the Engineer and the Environmental Protection Department for the project.

This report presents the results of the environmental monitoring of the project activities conducted during the month of May 2010. This included regular site inspections once per week for verification of implementation of the mitigation measures as recommended in the EM&A Manual and the Contractor’s Environmental Management Plan (EMP).

The construction works of Phase I have already commenced in July 2006 and have been completed in November 2008.


The construction works of Phase II commenced in December 2008 and is anticipated to be completed in July 2010.

The contact person and telephone number of key personnel for the captioned project are shown in Appendix 2.

### **1.2 Project Organization and Management**

The Works Contractor has commissioned Environmental Pioneers & Solutions Limited as the Environmental Team, which comprises the environmental team leader and the environmental technicians to undertake the environmental monitoring and audit work for this project. The project Organization Chart of Environmental Team is shown in Figure 1.1.

Figure 1.1 Organization Chart of Environmental Team

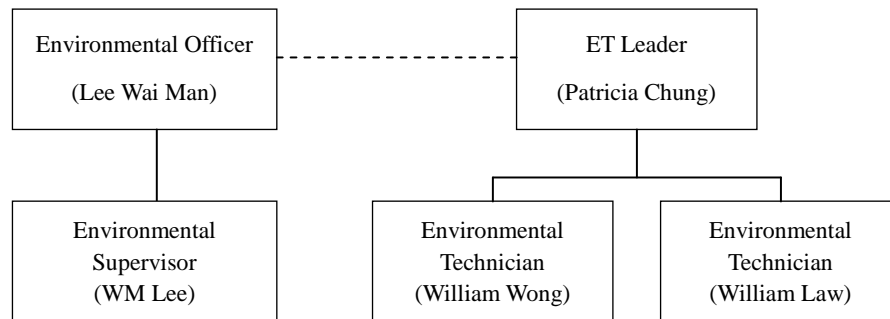

## 2. SUMMARY OF WORK ACTIVITIES AND CONSTRUCTION STATUS

### 2.1 Works Undertaken during the Month

A summary of the site installation works in this month, with the information of locations, activities, equipment/materials and dates of occurrence, is provided by the Contractor, as shown in Table 2.1.

Table 2.1 Work Activities for May 2010		
Item	Work Activities & Location	Date of Occurrence
1	Site formation works	01 May 2010 – 31 May 2010
2	Road Formation works	01 May 2010 – 31 May 2010

Machineries		
	Equipment/ Plant	Quantity
1	Mobile Crane	0
2	Excavator	0
3	Generator	2
4	Air Compressor	1
5	Roller	0
6	Loader	1
7	Grab Lorry	0
8	Crane Lorry	1
9	Water Truck	1
10	Dump Truck	1

Remarks:

- As informed by the Contractor, most equipment is mobile at site subject to work progress.
- Refer to Appendix 1 – Site layout plan for location of construction activities.

## 2.2 Future Key Issues

The Contractor has provided an updated construction program in Table 2.2 to show the planned activities for the coming month (June 2010). The anticipated environmental issues are summarized as follow:

Table 2.2 Construction Program and Anticipated Environmental Issues		
Item	Works	Anticipated Environmental Issues
1	Site formation works and road works	<ul style="list-style-type: none"> <li>- Generation of C&amp;D waste should be reused as much as practicable.</li> <li>- Dust may be generated; the wheel washing machine should be in operation.</li> <li>- Haul road should be sprayed regularly, by truck or sprinkler.</li> <li>- Stagnant water should be removed.</li> <li>- Mosquito mitigation measures should be implemented.</li> </ul>

The site inspection schedule for the next month (June 2010) is designated on 3<sup>rd</sup>, 10<sup>th</sup>, 17<sup>th</sup> and 24<sup>th</sup> of June 2010.



### **3. STATUS OF ENVIRONMENTAL PROTECTION AND SITE INSPECTIONS**

#### **3.1 Environmental Site Inspections**

Environmental site inspections are required to inspect the construction activities of the Development of EcoPark in order to ensure that appropriate environmental protection and pollution control mitigation measures are properly implemented. Regular site inspections should be carried out by the ET once per week during construction phase.

Outstanding issues at the end of April 2010 includes:

1. Road A, B and D are covered with dirt and dust. Contractor was reminded to clean construction vehicles thoroughly before leaving the construction site. Tentative closing date is 30<sup>th</sup> June, 2010.
2. General waste was piled near Contractor's site office. Contractor was reminded to monitor the waste collecting schedule and revise if the existing schedule does not adequately meet the current needs. Tentative closing date is 30<sup>th</sup> June, 2010.

Site inspections for Phase II construction site were conducted on 6<sup>th</sup>, 13<sup>th</sup>, 20<sup>th</sup> and 27<sup>th</sup> of May 2010.

A detailed checklist of each site inspection together with comments, relevant photos and maps have been filed and kept.

The findings and results of site inspections are provided in Table 3.1:

Table 3.1 Summary of Site Inspections for Phase II construction site during May 2010				
Date	Observations	Advice from ET	Action taken	Closing Date
09 October 09 to 31 May 10	Road A near construction site exit is covered with dirt and dust.	Contractor was reminded to manually wash the vehicles leaving the construction site before the automatic wheel washing machine is repaired or replaced.	Site entrance was relocated to Lot 10 facing Road D.	To be followed in the next reporting month. (Tentative closing date: 30 June 2010)
11 December 09 to 31 May 10	Roads A and D are covered with dirt and dust.	Contractor was reminded to manually wash the vehicles leaving the construction site before the automatic wheel washing machine is repaired or replaced.	Contractor instructed drivers and workers to manually wash wheels of vehicles until further notice.	To be followed in the next reporting month. (Tentative closing date: 30 June 2010)
25 March 10 to 31 May 10	General waste was piled near the Contractor's site office.	Contractor was reminded to monitor the waste collecting schedule and revise if the existing schedule does not adequately meet the current needs.	--	To be followed in the next reporting month. (Tentative closing date: 30 June 2010)
25 March 10 to 6 May 10	Road B near construction site exit is covered with dirt and dust.	Contractor was reminded to thoroughly wash the vehicles before leaving the construction site.	Contractor sprayed and washed Road B and instructed workers to properly wash construction vehicles before leaving the construction site.	13 May 2010
22 April 10 to 29 April 10	Muddy water was observed near storm drains.	Contractor was reminded to clean wheels of construction vehicles inside the construction site to prevent muddy water to flow outside the construction site and do not place packages of soil on the roads.	Contractor took action and instructed workers to properly wash construction vehicles and handle dusty material with extra care outside of site boundaries.	To be followed in the next reporting month. (Tentative closing date: 30 June 2010)
29 April 10	The door of one chemical waste storage cabinet did not close and lock.	Contractor was reminded to monitor and maintain the chemical waste storage facilities and provide locks to properly lock the storage cabinets.	Contractor took action in mounting the doors firmly with metal wire and locked the doors.	6 May 2010
20 May 10	Accumulated water has been observed in drip tray in chemical storage area.	Contractor was reminded to clear the stagnant water regularly to prevent overflowing of oil and fuel.	Contractor took action in removing stagnant water in drip tray in chemical storage area.	27 May 2010

Table 3.1 Summary of Site Inspections for Phase II construction site during May 2010				
Date	Observations	Advice from ET	Action taken	Closing Date
27 May 10	General waste was piled at Lot 10.	Contractor was reminded to monitor the waste collecting schedule and revise if the existing schedule does not adequately meet the current needs.	--	To be followed in the next reporting month. (Tentative closing date: 30 June 2010)

### 3.2 Air Dust

Excavation work is being carried out in Phase II construction site. Dust problem may be arisen when stockpiles of excavated materials are not enclosed, covered or dampened during dry or windy conditions. Dust suppression measures such as water spraying have been observed in the reporting month.

### 3.3 Noise

The major noise source was vehicle movement and machinery in the EcoPark. Since the nearby NSRs were remote, the noise impact was minimal. There was no specific observation noted regarding noise issue. The Contractor has obtained the Construction Noise Permit on 19 Jan 2010 and it will be expire on 18 Jul 2010.

### 3.4 Surface Water Quality

Since there was no water discharge at manhole, the Contractor removed the silt curtain installed at discharge point on 4 April 2007, as agreed by the Engineer's Representative. Muddy water was observed at discharge point for Phase I construction site on 14 August 2009. The contractor was reminded to consider using a slit curtain if the discharge continues. As informed by Engineer's Representative, there was no direct water discharge at manhole in Phase II construction site. No muddy water discharge is expected.

Chemical toilets (1 nos.) have been provided in Phase II construction site by a licensed contractor, of which sewage generated, is collected every three to five days without causing contamination on surface water. The Effluent Discharge License was issued to the Contractor on 20 November 2006.

The temporary storage tank was used to store the effluent of aerobic wastewater treatment system and the stored effluent was pumped away regularly. As checked by the ET, there was no effluent discharge into the storm water drain. To avoid any sewage overflow, frequent checking is required after the commencement of Phase II construction works.

Road B near the new site entrance was covered with dirt and dust. Contractor was reminded to thoroughly wash the vehicles before leaving the construction site.

### 3.5 Visual and Landscape Impact

Nil.

### 3.6 Waste / Chemical Waste

The Contractor implemented visual inspection and distributed flyers/ notices to ensure all dump trucks have mechanical covers closed when leaving EcoPark site.

Separate waste collection bins were made available for collecting aluminum cans, waste paper and plastic bottles etc. The Contractor has provided the revised site layout plan for refuse collection points as shown in Appendix 3.

Waste dumpsters were used for the collection and storage of general waste. Temporary storage areas for waste metals and waste tires were established in Phase I construction site. For Phase II construction site, a designated refuse collection point has been

established and location is shown in Appendix 3.

Excavated materials are reused as back-fill material to balance cut and fill and hence reduce the generation of materials. Surplus materials are returned to stock in centralized area with suitable protective measures. The Contractor was reminded to comply with the requirements and conditions for disposal at public fill facility and all oversized aggregates should be crushed to less than 250mm before delivering to the public fill.

Materials are recycled and re-used at site as much as practicable to minimize waste generation. Timbers are recycled to make temporary tools and access ladders etc. Excavated rocks, concrete and asphalts are stored for future re-use in land formation and structural construction etc.

Registered waste collectors will be arranged to collect and transport the wastes whenever necessary.

Table 3.4 provides a summary table of waste disposal in April 2010. The Contractor has been reminded to keep good record at site in order to have a clear presentation of waste disposal.

Table 3.4 Summary of Waste Disposal in May 2010			
Type of Waste	Disposal Site	Quantity	Remarks
General Waste	WENT Landfill	1.9 tonnes	-
Inert C&D Material	Public Fill Facility	240.42 tonnes*	-

\*Note: Excavated soil and concrete unable to back filled.

### 3.7 Landfill Gas

There was no LFG monitoring required as all excavation pits are filled since February 2010.

Table 3.5 Action Levels, Limit Levels and Event and Action Plan for LFG (From EM&amp;A Manual)

Parameter	Level	Action
Oxygen	Action Level < 19% O <sub>2</sub>	Ventilate trench/ void to restore O <sub>2</sub> to >19%
	Limit Level < 18% O <sub>2</sub>	Stop works Evacuate personnel/prohibit entry Increase ventilation to restore O <sub>2</sub> to > 19%
Methane (CH <sub>4</sub> )	Action Level >10% LEL	Post “No Smoking” signs Prohibit hot works Increase ventilation to restore CH <sub>4</sub> to <10% LEL
	Limit Level >20% LEL	Stop works Evacuate personnel/prohibit entry Increase ventilation to restore CH <sub>4</sub> to <10% LEL
Carbon Dioxide (CO <sub>2</sub> )	Action Level >0.5% CO <sub>2</sub>	Ventilate to restore CO <sub>2</sub> to < 0.5%
	Limit Level >1.5% CO <sub>2</sub>	Stop works Evacuate personnel/prohibit entry Increase ventilation to restore CO <sub>2</sub> to < 0.5%

#### 4. SUMMARY OF ENVIRONMENTAL PERMIT AND LICENCES

ET has checked with the Contractor for the status of all environmental permits and licenses for this project as at April 2010, which is summarized in Table 4.1. ET will follow the application process of the outstanding permits / licenses and will provide suitable assistance whenever appropriate.

Table 4.1 Summary of Environmental Permits/Licences				
<b>Description</b>	<b>License / Permit No.#</b>	<b>Date of Issue</b>	<b>Date of Expiry</b>	<b>Status/Remarks</b>
Environmental Permit	EP-226/2005/A	9-Sept-2005	--	Issued
Registration of Waste Producer	5111-421-K2869-02	27-Jul-2006	--	Issued
Construction Noise Permit	GW-RW0012-10	19-Jan-2010	18-Jul-2010	Issued
Effluent Discharge Licence	EP760/421/011762/I	20-Nov-2006	1-Dec-2011	Issued

#### 5. CUMULATIVE LOG OF COMPLAINTS AND REMEDIAL ACTION

The cumulative log of complaints is referred in Appendix 4.

#### 6. CUMULATIVE LOG OF NOTIFICATION OF SUMMONS AND PROSECUTIONS

No notification of summons and no prosecutions occurred during May 2010.

## **7. CONCLUSION**

There is no summon nor prosecutions reported during May 2010.

Several environmental issues, such as the housekeeping issues and dust and soil were spread over Roads A, B and D, have been identified by ET during weekly site inspections in the reporting month. Contractor has implemented some mitigation measures to address those problems as advised by ET. Some of the measures taken by the contractor were considered as effective to minimize negative impact to the environment. On-going investigation will be carried out to observe performance and effectiveness of those measures. Outstanding environmental items will be inspected in the following month.


The Contractor has been using the waste management and record system including allocation of waste storage areas and the trip ticket system as proposed in the Environmental Management Plan.

There was no LFG monitoring required as all excavation pits are filled since February 2010.

The ET will continue to implement the environmental monitoring & audit programme in accordance with the EM&A Manual and Environmental Permit requirement.



## APPENDIX 1 - SITE LAYOUT PLAN

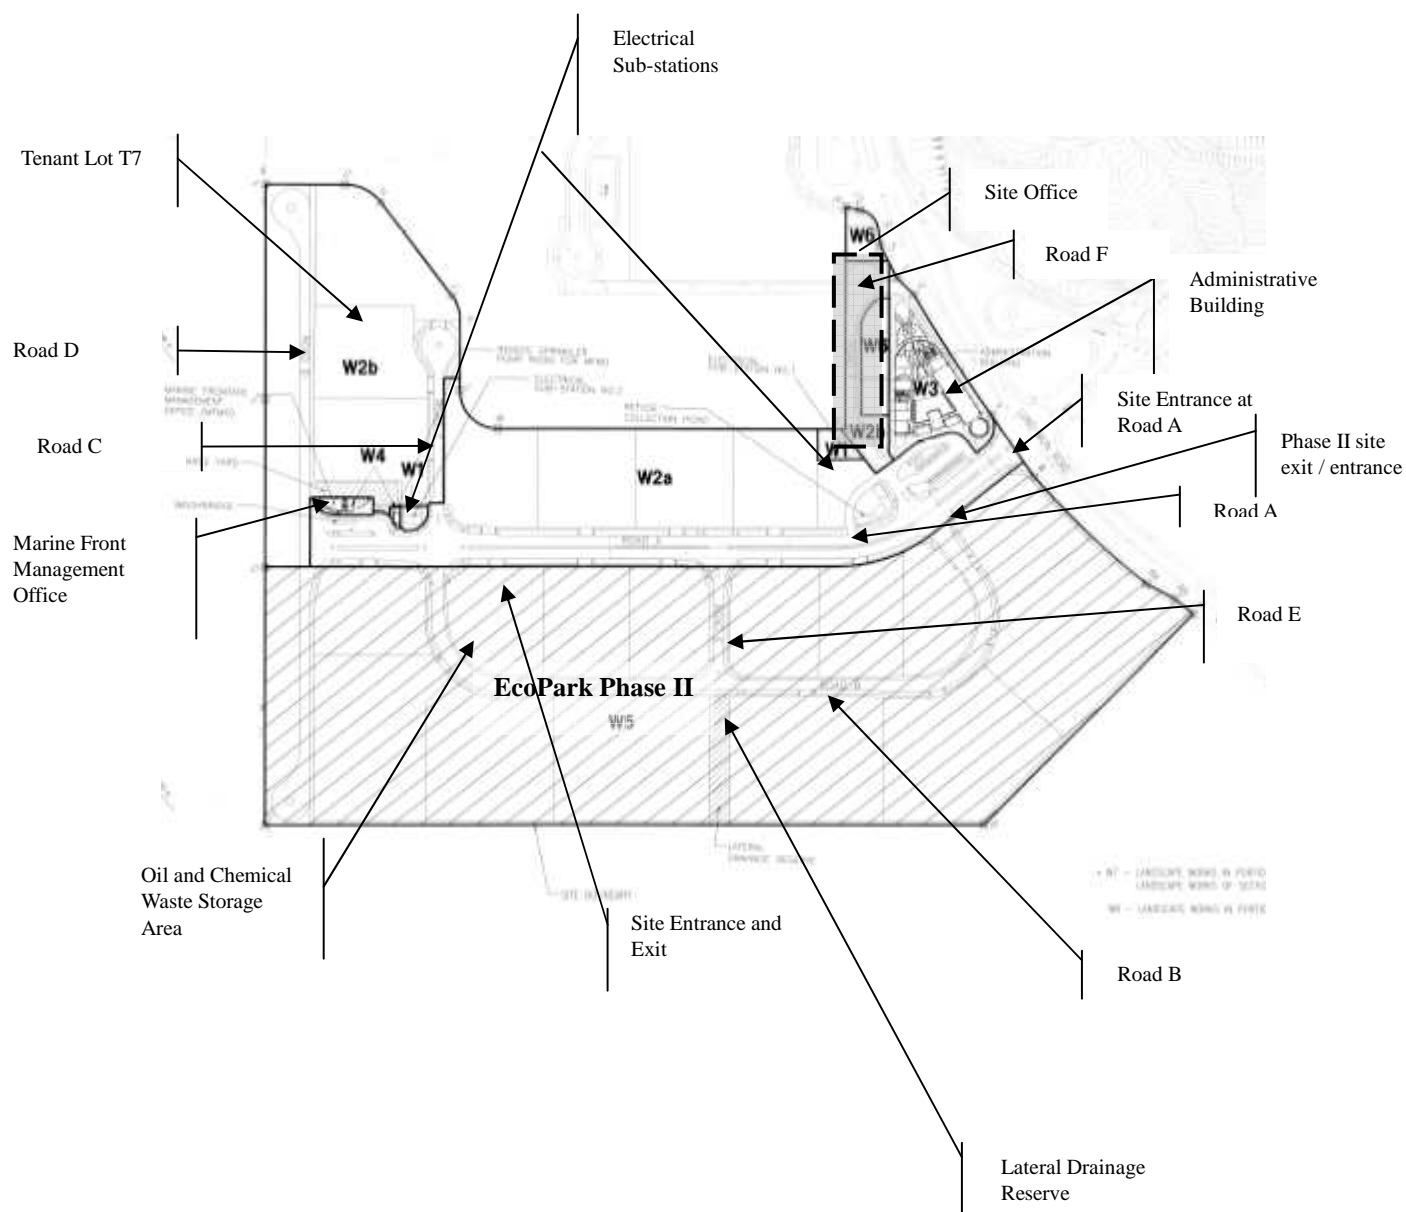

**APPENDIX 2 - THE CONTACT PERSONS, TELEPHONE NUMBERS OF KEY PERSONNEL FOR DEVELOPMENT OF ECOPARK IN TUEN MUN AREA 38**


<b>Company/Department</b>	<b>Name</b>	<b>Position</b>	<b>Telephone</b>
Scott Wilson Ltd.	Harold Insley	Independent Environmental Checker	2410 3858
Scott Wilson Ltd.	Mr. Andy Cheung	Resident Engineer	6111 9703
Scott Wilson Ltd.	Mr. T W Wong	Inspector	6111 9705
Kaden Construction Limited	Mr. K M Book	Project Manager	9193 8680
Kaden Construction Limited	Mr. Stephen Leung	Section Agent	9071 7657
Environmental Pioneers & Solutions Limited	Miss. Patricia Chung	Environmental Team Leader	2965 0888
Environmental Pioneers & Solutions Limited	Mr. William Wong	Environmental Technician	2965 0818
Environmental Pioneers & Solutions Limited	Mr. William Law	Environmental Technician	2965 0882

### APPENDIX 3 – REVISED SITE LAYOUT PLAN FOR REFUSE COLLECTION POINTS

Development of EcoPark in Tuen Mun Area 38

Contract No. EP/SP/52/06  
EM&A Report No. 30 (December 2008)

### APPENDIX 3 – REVISED SITE LAYOUT PLAN FOR REFUSE COLLECTION POINTS

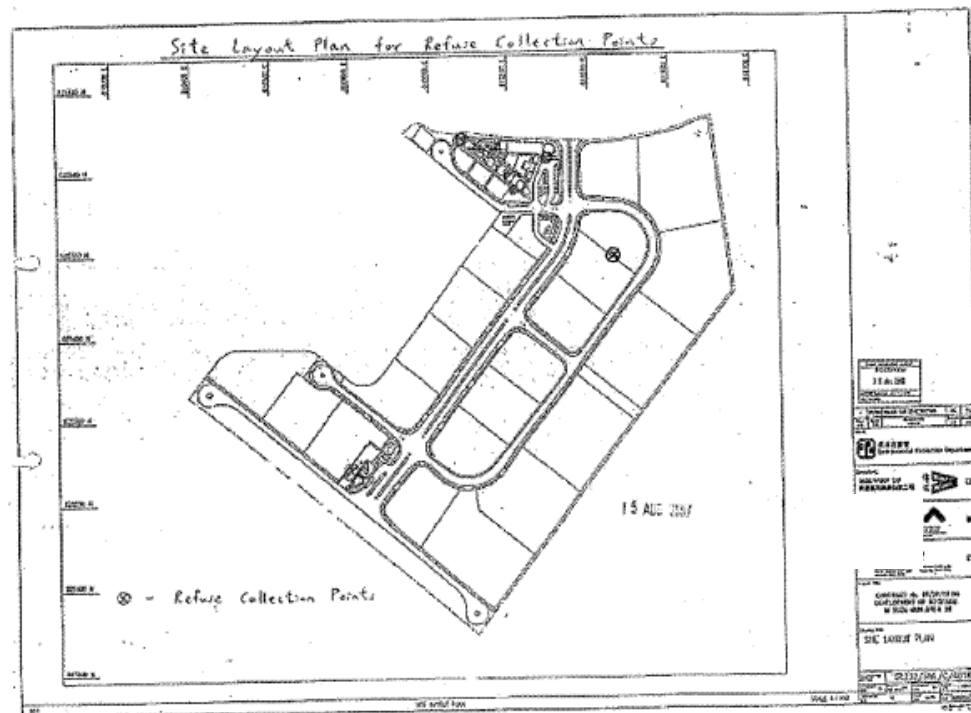

**APPENDIX 4 – CUMULATIVE LOG OF COMPLAINTS****CUMULATIVE LOG OF COMPLAINTS**

<b>Environmental Parameters</b>	<b>No. of Outstanding Complaints</b>	<b>No. of complaints received in April 2010</b>	<b>Cumulative no. of complaints received since the commencement of project</b>
Air	0	0	2
Noise	0	0	0
Water	0	0	0
Waste	0	0	0
Total	0	0	2

**DETAILS OF COMPLAINTS AND REMEDIAL ACTIONS**

<b>Log Ref.</b>	<b>Date of Complaint received</b>	<b>Location</b>	<b>Complainant /Date</b>	<b>Details of Complaint</b>	<b>Investigation /Mitigation Action</b>	<b>Investigated by/ Date</b>
-	-	-	-	-	-	-