



Ocean Park Master Redevelopment Project


Monthly Environmental Monitoring & Audit Report – May 2007



Ocean Park Master Redevelopment Project

EP-249/2006/A – Condition 3.4

Monthly EM&A Report – May 2007

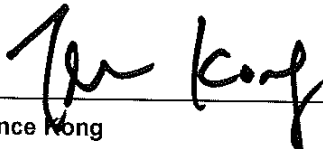Certified by  on 13-Jun-07

Terence Kong

Project Environmental Team Leader

Verified by Independent Environmental Checker on 13-Jun -07

IEC Certificate attached in the submission? Yes

Submitted to Ocean Park on 13-Jun-07

Ocean Park Master Redevelopment Project

Environmental Permit No. EP-249/2006/A - Condition 3.4

Monthly EM&A Report – May 2007

Submitted by Maunsell Consultants Asia Ltd on 08-06-2007

This is to verify that

Monthly EM&A Report – May 2007

Submitted by Maunsell Consultants Asia Ltd

On 08-06-2007

Has been verified by the undersigned.

Signed



Dr Anne F Kerr
Independent Environmental Checker (IEC)
Retained by Ocean Park Corporation
pursuant to Environmental Permit No. EP-249/2006/A

Date

13 June 2007

Table of Content

Part 1 Project Overview

Executive Summary

1.	Introduction.....	2
2.	Project Organisation	2
3.	Construction Works Undertaken during the Reporting Month.....	3
4.	Permits and License Status.....	3
4.1.	ENVIRONMENTAL PERMIT	3
4.2.	CNP	4
4.3.	OTHER PERMITS & LICENSES	5
5.	EP Submissions Status	6
6.	Waste Management	7
7.	Environmental Monitoring and Results	7
7.1.	REQUIREMENTS	7
7.2.	MONITORING LOCATIONS	7
7.3.	MONITORING RESULTS.....	8
7.4.	EXCEEDANCES	9
8.	Site Audit	10
8.1.	IEC SITE AUDIT	10
8.2.	NON- COMPLIANCE	10
9.	Implementation status of Environmental Mitigation Measures	10
10.	Summary of Complaint, Summon or Prosecution	10
11.	Future Issues	11
12.	Conclusion and Recommendation	12
12.1.	CONCLUSION	12
12.2.	RECOMMENDATION	12

Appendix A IEC's Site Inspection Records

Part 2 CI-05 EM&A Monthly Report

Part 3 CS-01 EM&A Monthly Report

Part 1 Project Overview

Executive Summary

This is the combined monthly EM&A Report for Ocean Park Master Redevelopment Project, which includes Contract CI-05 “Site Formation, Funicular Tunnel and Miscellaneous Work” and CS-01 “The Vet Hospital”. This report presents the results of EM&A works conducted in the reporting month of April 2007 (from 26 April 2007 to 25 May 2007).

A summary of monitoring and audit activities conducted in the reporting period is listed below:

1-hour TSP monitoring	14 sessions for AM1 (due to power failure) 15 sessions for AM2 13 sessions for AM3 (due to power failure)
24-hour TSP monitoring	4 sessions for AM1 & AM3 (due to power failure) 5 sessions for AM2
Daytime noise monitoring	4 sessions
Evening and night time noise monitoring	0 sessions
Holiday time noise monitoring	0 sessions
Terrestrial ecology monitoring	0 sessions
Coral monitoring	0 sessions
Environmental Site Inspection	6 sessions

No exceedance was recorded on the 1-hour TSP monitoring, 24-hour TSP monitoring and daytime noise monitoring. No non-compliance from IEC, complaint, summons or prosecution related to environmental issues was made against the Ocean Park Master Redevelopment Project in the reporting period of May 2007.

1. Introduction

The “Master Redevelopment Project of Ocean Park” (hereinafter known as the “Project”) is implemented by the Ocean Park Corporation at its existing site of Ocean Park and Nam Long Shan, Aberdeen. The Project involves both reconstruction/modification of existing facilities and expansion of the Park, and therefore under Environmental Permit, EP-249/2006/A.

The construction works of the project consists of various contracts. Details of the contracts, which are required to perform the EM&A programme, are shown below.


Contract No.	Contract Title	Contractor	Construction Commencement
CI-05	Site Formation, Funicular Tunnel and Miscellaneous Works	Dragages-Bouygues JV	12 March 2007
CS-01	Vet Hospital	Kaden – ATAL JV	26 March 2007

The contractors will conduct environmental monitoring and audits during the construction stage and produce contract specific monthly EM&A reports. The RSS will prepare a combined monthly EM&A for the project. This is the combined monthly EM&A Report including the IEC audit findings, CI05 and CS01 Monthly EM&A Report. This report presents the results of EM&A works conducted in the reporting month of May 2007 (from 26 April 2007 to 25 May 2007).

2. Project Organisation

The structure of the environmental management team is shown in below figure.

Management Organization

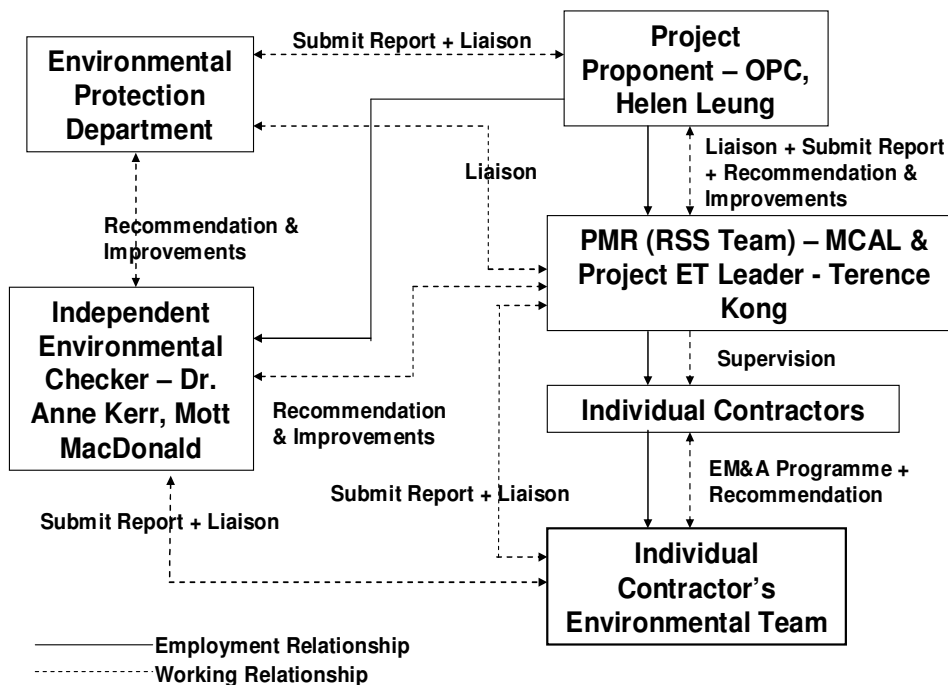

3. Construction Works Undertaken during the Reporting Month

In the reporting month, the construction activities summarise as follows.

CI-05

Waterfront

- Utilities Diversion
- Grouting Works
- Pipe Pile
- Excavation
- Demolition
- Enhancement of Pond 35
- EVA
- Waterfront Access Road

Tai Shue Wan

- Conveyor Belt Footing
- Access Road for Conveyor Footing

CS-01

- Excavation for footings
- Construction of temporary Water Management
- Site access road formation
- Site Formation for Plant Block, Pool Block and Office Block

Summit

- Site Formation at Adit Portal
- Slope Stabilization
- Rock Fall Fence
- Utilities Diversion
- Haul Road Formation & Excavation
- Temporary Drainage, Sedimentation tank & WetSep Installation
- Crusher Platform and Conveyor Belt Footing Erection

Nam Long Shan Road Entrusted Works

- Sewage works

4. Permits and License Status

4.1. Environmental Permit

The Environmental Impact Assessment (EIA) Report of the Project has been approved by the Environmental Protection Department (EPD) (Register No.: AEIAR-101/2006) on 12 July 2006. Subsequently, EPD issued Environmental Permit (EP) for the construction and operation of the project. Table below is a full list of the EPs.

EP No.	Issue Date	Key Variation
EP-249/2006	28 July 2006	First EP
EP-249/2006/A	25 September 2006	• Enhance the roosting habitat for freshwater birds by enlarging Pond 35 and its surrounds with a total area of no less than 120 squares meters and no construction works and discharge from construction sites shall be allowed within Pond 35 after enhancement. • Filling of Pond 37 at the Lowland Area. • Submission of the as-built drawings showing the enhancement works of Pond 35.

4.2. CNP

Table below is a list of CNP within the reporting month.

Permit number	Starting Date	Expired Date	Valid Time	Location	Contract No.	Status
CI-05 (DBJV)						
GW-RS0196-07	10-Apr-07	2-May-07	<i>PME</i> 19:00 - 23:00 (Not being a general holdiai) One group of equipment shall be allowed in above time. <i>PCW</i> 19:00 - 23:00 (Not being a general holdiai)	Summit (At top of Nam Long Shan Road)	CI-05	Expired
GW-RS0200-07	5-Apr-07	30-Jun-07	<i>PME</i> Group A and C: 09:00 - 19:00 (General Holidatys). Other groups: 19:00 - 23:00 (Not being a general holiday).09:00 - 19:00 (General Holidays) One group of equipment shall be allowed in above time. <i>PCW</i> 00:00 - 24:00 (General Holidays) 00:00 - 07:00 and 19:00 - 24:00 (Not being a general holiday)	Waterfront (Panda Access Ramp)	CI-05	Valid
GW-RS-0240-07	4-May-07	30-Jun-07	<i>PME</i> 19:00 - 23:00 (Not being a general holdiai) 09:00 - 19:00 (General holiday) <i>PCW</i> 00:00 - 07:00, 19:00 - 24:00 (Not being a general holdiai)	Summit (at the top of Nam Long Shan Road)	CI-05	Valid
GW-RS-0269-07	9-May-07	30-Jun-07	00:00 – 24:00 hours on general holidays (including Sundays), 00:00 – 07:00 hours and 19:00-24:00 hours on any day not being a general holiday.	Ocean Park Shum Wan Road	CI-05	Valid
CS-01 (Kaden)						
GW-RS0170-07	2-Apr-07	25-Sep-07	19:00 - 23:00 (Not being a general holdiai). 09:00 - 19:00 (General holidays). One group of equipment shall be allowed in above time.	Summit (At top of Nam Long Shan Road)	CS-01	Cancelled
GW-RS0286-07	26-May-07	25-Nov-07	19:00 - 23:00 (Not being a general holdiai). 07:00 - 19:00 (General holidays). One group of equipment shall be allowed in above time.	Summit (At top of Nam Long Shan Road)	CS-01	Valid

4.3. Other Permits & Licenses

Table below is a list of other permits & license for individual contracts.

CI – 05

Permit /Ref/ No	Valid Period		Section	Status
Notification of Construction Work under APCO				
001017998	-	-	Waterfront	Notified
001018054	-	-	Summit	Notified
Effluent Discharge License				
Application for Summit sent on 28-Apr-07				
Specific Process License				
Application sent on 3-Apr-07 and discussion with EPD is in progress.				
Registration as Chemical Waste Producer				
WPN5213-199-D2373-01	7-May-07	-	For disposal of chemical wastes, mainly spent lubricants	Registered
Construction Waste Disposal Charging Scheme				
7004888	-	-	Waterfront + Summit	Issued

CS-01

Permit/Ref/No	Valid Period		Section	Status
Notification of Construction Work under APCO				
001018953	-	-	Vet Hospital	Notified
Effluent Discharge License				
Application sent on 13-Mar-07 and await for reply				
Registration as Chemical Waste Producer				
5213-199-K2880-01	19 Mar 07	-	Used battery, used lubricating oil and lubricating oil / gasoline / diesel contaminated soil.	Registered
Construction Waste Disposal Charging Scheme				
7005185	-	-	Vet Hospital	Issued

5. EP Submissions Status

Environmental submissions to EPD in the reporting period, i.e. from 12 March 2007 to 31 May 2007 are as below,

Contract	Submissions
CI-05	• Notification of Commencement Date • Management Organisation Chart • Construction Programme • Drainage Proposal • Silt Curtain Proposal • Waste Management Plan • Baseline Monitoring Report • Transplantation Proposal for Uncommon Species
CI-05 & CS-01	• Combined Monthly EM&A Report (April 2007)
City Bus Limited	• Written Notice on Completion of TPH Contaminated Soil Disposal • Written Notice on Completion of Solidification Treatment of Heavy Metals Contaminated • As-built Remediation Plan
Hong Kong School of Motoring Ltd.	• Confirmation Letter to confirm that Land Contamination remediation Works within HKSM has been completed

6. Waste Management

The estimated amounts of different types of waste generated by the activities of the Project in the month are shown in following table. Mitigation measures under the Waste Management Plan (WMP) have been implemented during the reporting period.

Waste Type	Disposal Locations	CI-05	CS-01	Total
C& D Waste	SENT	51.31 tonnes	10.01 tonnes	61.32 tonnes
	TKOSF	97.9 tonnes	--	97.9 tonnes
	TMSF	83.09 tonnes	--	83.09 tonnes
Excavated Material	QBBP	3664.57 tonnes	1949.21 tonnes	5613.78 tonnes
	TKOFB	43.43 tonnes	24.78 tonnes	68.21 tonnes
	Alternative site (Green Valley)	3170 tonnes	--	3170 tonnes
	Internal Transfer	830 tonnes	--	830 tonnes
Chemical Waste	Collected by licensed collector	--	--	--
General Waste	Collected by licensed collector	46.5m ³	--	46.5m ³

7. Environmental Monitoring and Results

7.1. Requirements

Under EP-249/2006/A condition 3.2, impact environmental monitoring including sampling, measurements and necessary remedial action should be conducted in accordance with the requirements of the EM&A Manual. The environmental monitoring including air quality and noise were conducted by the Contract of CI-05 within the reporting period. There was no impact coral monitoring conducted within the reporting month since the construction works such as blasting and tunneling would not be commenced until early June 2007. Since the transplantation proposal has submitted during the reporting month and waiting for approval, no monitoring of terrestrial ecology has been undertaken.

The items below would not be described in Part 1 report and would be described in CI-05 monthly EM&A report (i.e. Part 2 of the report).

- Methodology and Criteria
- Action and Limit Levels
- Event and Action Plan

7.2. Monitoring Locations

Air Quality (TSP)

The locations of the air monitoring stations are presented in the table below. The figure was shown in the CI-05 Monthly EM&A Report.

Air Quality Monitoring Stations	Identify/Description
AM1	Whisker's Theatre, Ocean Park
AM2	San Wai Village, Wong Chuk Hang
AM3	Ocean Park Road, 50m adjacent to Police Training School

Construction Noise

The locations of the noise monitoring stations are presented in the table below. The figure was shown in the CI-05 Monthly EM&A Report.

Noise Monitoring Stations	Identify/Description
CN1	Open Area adjacent to Police Training School
CN2	Project Development Office, Ocean Park
CN3	Rinniped House, Ocean Park
CN4	Manly Villa

Terrestrial Ecology

Monitoring of the health and condition of the transplanted plant species of conservation interest should be monitored at least once a month during the first 12 month after transplantation. Proposed monitoring location would be next to the Contract CI-05 site office shown in figure 1.3 of Part 2 of the report.

Coral

The locations of the coral monitoring stations are presented in the table below. The figure was shown in the CI-05 Monthly EM&A Report.

Coral Impact Monitoring Stations	Identify/Description
Site 1	Seaside near the Lowland
Site2 to Site 5	Around Headland
Control Station	Near Round Island and Chung Hom Kok

7.3. Monitoring Results

Air Quality (TSP)

The monitoring data reported below was provided by the CI-05 Contractor's Environmental Team Leader.

Monitoring Period	1-hr TSP ($\mu\text{g}/\text{m}^3$)		
	AM1	AM2	AM3
26 Apr 07 to 25 May 07	77-207	79-202	103-278

Note: Please note that no measurement on 1-hr TSP was taken on 27 April 2007 at AM1 and 21 & 23 May 2007 at AM3 due to power failure.

Monitoring Period	24-hr TSP ($\mu\text{g}/\text{m}^3$)		
	AM1	AM2	AM3
26 Apr 07 to 25 May 07	51-70	54-73	72-91

Note: Please note that no measurement on 24-hr TSP was taken on 27 April 2007 at AM1 and on 21 May 2007 at AM3 due to power failure.

Construction Noise

The monitoring data reported below was provided by the CI-05 Contractor's Environmental Team Leader.

Monitoring Period	Daytime Noise Level, Leq (30min), dB(A)			
	CN1	CN2	CN3	CN4
26 Apr 07 to 25 May 07	60.9-63.3	60.6-66.1	55.5-57.0	54.8-57.3

Terrestrial Ecology

Since the transplantation proposal has submitted during the reporting month and waiting for approval, no monitoring has been undertaken.

Coral

There was no impact coral monitoring conducted within the reporting month since the construction works such as blasting and tunneling would not be commenced until early June 2007.

7.4. Exceedances

No exceedance was recorded on the 1-hour TSP monitoring, 24-hour TSP monitoring and daytime noise monitoring.

8. Site Audit

8.1. IEC Site Audit

IEC conducted monthly site audit on CI-05 and CS-01 on 29 May 2007.

CI-05 Observations

Following up the previous audit, all the items were closed except the following:

1. Hong Kong School of Motoring and Area next to Go-Kart
Stagnant water was still observed due to rainstorm and shall be removed by pump as soon as possible.

New items

2. Ramp next to Panda House
Haul road was dry and dusty and shall be sprayed with water more frequently to suppress dust.
3. Adit Portal
Waste skip was full and accumulated with waste. Waste shall be removed from skip as soon as possible.

CS-01 Observations

- (i) Following up the previous audit, all the items were closed.
- (ii) Stagnant water on-site shall be removed by pump as soon as possible.
- (iii) Sedimentation tank shall be maintained more frequently.

Audit checklists are attached in Appendix A of Part I.

8.2. Non-Compliance

No non-compliances were recorded in May 2007.

9. Implementation status of Environmental Mitigation Measures

Please see Part 2 and Part 3 of the individual contractual reports for the details of the implementation of environmental mitigation measures.

10. Summary of Complaint, Summon or Prosecution

No complaint, summons or prosecution related to environmental issues was received or made against the Project in May 2007.

11. Future Issues

Key Issues to be considered in the coming month include:

CI-05

- Noise from operating equipment and machinery on-site
- Maintenance of the silt curtain at Tai Shue Wan
- Construction waste management at the demolition work area
- Avoid accumulation of stagnant/muddy water on-site in order to prevent mosquito breeding.
- To implement dust suppression measures on dry surfaces
- Provision of temporary drainage system, treatment to turbid water from activities, run-off before discharge.

CS-01

- Noise from operating equipment and machinery on-site
- On-site waste management
- Avoid accumulation of stagnant/muddy water on-site in order to prevent mosquito breeding.
- To implement dust suppression measures on dry surfaces
- Well maintenance to equipment to avoid black smoke from machinery
- Provision of temporary drainage system, treatment to turbid water from activities, run-off before discharge.

12. Conclusion and Recommendation

12.1. Conclusion

Environmental impact monitoring was performed in May 2007. All monitoring results in the reporting month were checked and reviewed.

No exceedance was recorded on the 1-hour TSP monitoring, 24-hour TSP monitoring and daytime noise monitoring.

No non-compliance from IEC, complaint, summons or prosecution related to environmental issues was made against the Ocean Park Master Redevelopment Project in the reporting period of May 2007.

12.2. Recommendation

According to the environmental audit performed in the reporting month, the following recommendations are made:

Air Quality Impact

- To prohibit any open burning on site.
- To recommend that the Contractors should regularly maintain the machinery and vehicles on site.
- To follow up any exceedance caused by the construction works.
- To monitor the implementation dust suppression measures on dry surfaces by the Contractors.

Noise Impact

- To inspect the noise sources from inside and outside of the site.
- To follow up any exceedance caused by the construction works.
- To recommend that the Contractors should space out noisy equipment and position as far away as possible from sensitive receivers.
- To recommend the Contractors should have regular maintenance of vehicles and equipment used.

Water Quality Impact

- To recommend that the Contractor of CI-05 should regularly maintain the silt curtains and make sure they are in the right positions and maintain their functionalities.
- To monitor whether open stockpiles of construction materials are covered by Contractors with tarpaulin or similar fabric during rainstorm.
- To remind the Contractor to fully implementation of the temporary drainage system and all sedimentation tank and WetSep should be fully operated.

Waste/Chemical Management

- To check for any accumulation of waste materials or rubbish on site.
- To avoid any discharge of chemical waste or oil directly from the site.
- To regularly and properly collect, store and dispose of all waste types, including floating refuses around the silt curtain.

Appendix A

Independent Environmental Checker's Site Inspection Records

**Ocean Park Master Redevelopment Project
Contract P007
Independent Environmental Checker**

MONTHLY SITE INSPECTION CHECKLIST

Inspection Date	29/5/2007	Time	13:30	Inspected By	EM: T. Kong IEC: F. Yuen
Site Location	CS01 CI05	Contractor: CS01: R. Fung CI05: S. Tam			

Weather

Condition	☒ Sunny	☐ Fine	☐ Overcast	☐ Drizzle	☐ Rain	☐ Storm	☐ Hazy
Temperature	31°C	Humidity	☒ High	☐ Moderate	☐ Low		
Wind	☒ Calm	☐ Light	☐ Breeze	☐ Strong	Direction		

		Close-out on last comments Y/N	N/A or not obs	Yes	No	Photo/Remarks
Construction Noise						
S2.18	Is a valid Construction Noise Permit (CNP) obtained for works during restricted hours?			☒		
S2.26	Good Site Practices:					
	• Are the operating plants well-maintained and serviced regularly?			☒		
	• Are silencers or mufflers utilized on construction equipment? Are they properly maintained?			☒		
	• Is the mobile plant sited far enough from NSRs?		☒			
	• Are intermittently used machines and plants shut down between work periods?			☒		
	• Is the plant known to emit noise strongly in one direction, if any, oriented to direct noise away from the NSRs?		☒			
	• Is the stockpile or other structures utilized effectively, wherever practicable, in screening noise from the works?		☒			
S2.27	Are suitable quiet plants adopted?			☒		
S2.28	Are movable barriers used for both movable PME and stationary PME?		☒			
S2.29	Do the screening materials used achieve the predicted noise reduction?		☒			
S2.30	Are the noisy works avoided during examination period of the nearby school?		☒			

Blasting Noise

S2.32	• Are the NSRs informed of the blasting work in advance?		☒			
-------	--	-------------	-------------------------------------	-------------	-------------	--

- Is sufficient time allowed for alerting all the potential NSRs prior to every blasting work?

	✓		
--	---	--	--

- Are proper procedures put in place to alert and minimise any startling effect on the staff working in Ocean Park?

	✓		
--	---	--	--

- Is the optimal amount of charge used evaluated for noise reduction?

	✓		
--	---	--	--

Landscape and Visual

S3.10 Consideration on existing surrounding vegetation:

- Are temporary tree nurseries set up?

	✓		
--	---	--	--

- Is "no-intrusion zones" implemented?

	✓		
--	---	--	--

- Is the existing vegetation protected from damage?

		✓	
--	--	---	--

- Are hill fire prevention measures taken?

		✓	
--	--	---	--

- Is dust and erosion controlled for exposed soil?

		✓	
--	--	---	--

- Are the irrigation networks set up throughout the Establishment Period?

	✓		
--	---	--	--

- Is Quarterly Report on existing trees to be retained or transplanted prepared by the Contractor?

	✓		
--	---	--	--

S3.11 Consideration on appearance and view:

- Is the appearance of hoardings suitable?

		✓	
--	--	---	--

- Is the appearance of construction workers, plants/machines suitable?

		✓	
--	--	---	--

- Are the screening and alignment of the temporary barging point and conveyor system suitable?

	✓		
--	---	--	--

- Are the selected security floodlights suitable

	✓		
--	---	--	--

Ecology

S4.5 Transplantation:

- Is the transplantation work supervised by a qualified botanist/horticulturalist in the ET?

	✓		
--	---	--	--

- Are the transplanted plant species of conservation interest monitored during the first 12 months after transplantation?

	✓		
--	---	--	--

S4.7 Construction:

- Is the runoff entering watercourses avoided by control measure, especially during heavy rain?

		✓	
--	--	---	--

- Is the site runoff directed to regularly cleaned and maintained silt traps (or oil separators)?

		✓	
--	--	---	--

- Are sediment traps included in drainage to collect and control construction run-off?

		✓	
--	--	---	--

- Is suitable size silt traps or oil interceptor used?

		✓	
--	--	---	--

- Is vegetation survey carried out to determine the feasibility and suitability of individual plants for transplantation?

	✓		
--	---	--	--

- Are the trees located within the works area preserved suitably?

		✓	
--	--	---	--

- Are individual plants of conservation interest transplanted prior to the construction phase?

	✓		
--	---	--	--

- Are the equipments and stockpiles placed in designated works areas and access routes selected on existing disturbed land to minimise disturbance to natural habitats?

		✓	
--	--	---	--
- Are construction activities restricted to the work areas demarcated?

		✓	
--	--	---	--
- Are waste skips provided to collect general refuse and construction wastes?

		✓	
--	--	---	--
- Are the wastes disposed of timely and properly off-site?

		✓	
--	--	---	--
- Is open burning on works sites prohibited?

		✓	
--	--	---	--
- Are native plant species made use of as far as possible on newly formed land?

	✓		
--	---	--	--

Construction Waste

- S5.4 Good Site Practices
- Are arrangements made for collection and effective disposal of all wastes generated?

		✓	
--	--	---	--
 - Are the waste management and chemical handling procedures followed?

		✓	
--	--	---	--
 - Are sufficient waste disposal points provided?

		✓	
--	--	---	--
 - Are the wastes disposed of regularly?

✓			✓
---	--	--	---
 - Are appropriate measures taken to minimise windblown litter and dust during transportation of waste by either covering trucks or transporting wastes in enclosed containers?

	✓		
--	---	--	--
 - Are the drainage systems, sumps and oil interceptors regularly cleaned and maintained?

		✓	
--	--	---	--

CI-5(3) P/020803

- S5.5 Waste Reduction Measures:
- Is the C&D waste from demolition and decommissioning of existing facilities sorted to recover recyclable materials?

		✓	
--	--	---	--
 - Are different types of wastes segregated and stored in different containers, skips or stockpiles to enhance reuse or recycling and the proper disposal?

		✓	
--	--	---	--
 - Are aluminium cans segregated in labelled bins and collected by individual collectors for recycling?

		✓	
--	--	---	--
 - Are proper storage and site practices maintained to minimise the potential for damage or contamination of construction material?

		✓	
--	--	---	--
 - Are the construction materials planned and stocked carefully to avoid unnecessary generation of waste?

		✓	
--	--	---	--

- S5.7 General Refuse
- Is the general refuse stored in enclosed bins or compaction units separate from C&D material?

		✓	
--	--	---	--
 - Is the general refuse removed regularly by a waste collector?

		✓	
--	--	---	--

- S5.8 C&D Material
- Are the excavated materials from site formation of the expansion areas and tunnel construction for the funicular system reused on-site as backfilling material and for landscape works?

		✓	
--	--	---	--
 - Are the surplus rock and other inert C&D material disposed of at the public fill sites?

	✓		
--	---	--	--
 - Is a waste management plan prepared?

		✓	
--	--	---	--

	• Is a recording system present for the record of amount of wastes generated, recycled and disposed?	☐	☐	☒	☐
	• Is the trip-ticket system required in ETWB TCW No.31/2004 followed on site?	☐	☐	☒	☐
S5.9	Chemical Wastes Is chemical wastes generated from the works? And if yes,	☐	☐	☒	☐
	• Is the Contractor registered as a Chemical Waste Producer?	☐	☒	☐	☐
	• Are good quality containers used for separating and storing chemical wastes?	☐	☒	☐	☐
	• Are appropriate labels securely attached on each chemical waste container to indicate their corresponding chemical characteristics?	☐	☐	☒	☐
	• Is the Contractor licensed to transport and dispose of the chemical wastes?	☐	☐	☒	☐
	Land Contamination				
S6.11	• Is the contact of construction workers with contaminated materials minimised by using bulk earth-moving excavator equipment?	☐	☒	☐	☐
	• Are appropriate cloth, personal protective equipment, hygiene and washing facilities provided to minimise exposure to any contaminated material?	☐	☒	☐	☐
	• Is stockpiling of contaminated excavated materials avoided?	☐	☒	☐	☐
	• Is the use of contaminated soil for landscaping without proper treatment prohibited?	☐	☒	☐	☐
	• Are vehicles containing excavated materials covered properly to limit potential dust emissions or contaminated wastewater runoff?	☐	☒	☐	☐
	• Is the speed of the trucks carrying contaminated materials controlled?	☐	☒	☐	☐
	• Are the necessary waste disposal permits obtained from appropriate authorities in according with Waste Disposal (Chemical Waste) (General) Regulation?	☐	☒	☐	☐
	• Are silt removal facilities provided with retention time for silt/sand traps of 5 minutes under maximum flow conditions?	☐	☒	☐	☐
	• Are the records maintained for quantity of wastes generated and disposal of?	☐	☒	☐	☐
S6.12	Remediation Process • Is biopile covered by tarpaulin or low permeable sheet to avoid dust emission?	☐	☒	☐	☐
	• Is vented air from biopile treated by blower and carbon adsorption system before released to the atmosphere?	☐	☒	☐	☐
	• Are the materials which may generate airborne dust emissions adequately wetted prior to and during the loading, unloading and handling operations?	☐	☒	☐	☐
	• Are silencers installed at biopile blower to minimise noise impact?	☐	☒	☐	☐
	• Are quiet plants such as generator and blower used for biopile?	☐	☒	☐	☐

- Are the mixing process and other associated material handling activities properly scheduled to minimise potential noise impact?

	✓		
--	---	--	--
- Are impermeable liners placed at the bottom of biopile?

	✓		
--	---	--	--
- Is leachate collection sump construction along the perimeter of biopile?

	✓		
--	---	--	--
- Is the leachate recycled back to the biopile or truck away to Chemical Waste Treatment Centre for disposal?

	✓		
--	---	--	--
- Is the mixing of contaminated soils and cement/water/other additive(s) undertaken at a solidification plant to minimise the potential for leaching?

	✓		
--	---	--	--
- Is a concrete bund construction along the perimeter of the solidification/stabilisation area to prevent runoff?

	✓		
--	---	--	--
- Are the loading, unloading, handling, transfer and storage of cement carried out in an enclosed system?

	✓		
--	---	--	--
- Are the contaminated soils transported by roll-off trucks (containerisation)?

	✓		
--	---	--	--
- Is temporary hoarding provided around the treatment area to minimise the visual impact?

	✓		
--	---	--	--

Air Quality

S7.23

Good Site Practices

- Is watering carried out regularly with complete coverage to reduce dust emissions from exposed site surfaces and unpaved roads, particularly during dry weather?

✓			✓
---	--	--	---

 CI05 (2) P1020787
- Is watering frequently carried out for particularly dusty construction areas, temporary stockpiles and areas close to ASRs?

✓			
---	--	--	--
- Are the aggregate or dusty material storage piles covered with their side enclosed to reduce emissions? Or if this is not practicable, is watering applied to aggregate fines?

		✓	
--	--	---	--
- Is open stockpiles avoided or covered and placed far enough from the ASRs?

✓			
---	--	--	--
- Is the dropping height of material restricted to minimise the fugitive dust from unloading/loading?

	✓		
--	---	--	--
- Is tarpaulin used to cover all dusty vehicle loads transported to, from and within the site?

		✓	
--	--	---	--
- Are vehicle wheel and body washing facilities available at the exit points of the site?

		✓	
--	--	---	--
- Are wind shield and dust extraction units or similar dust mitigation measures provided at the loading points? If dust generation is likely during the process, particularly in dry seasons, is water sprinklers provided at the loading site?

	✓		
--	---	--	--
- Do the vehicles comply with the recommended speed limit of 10 km/h on unpaved roads?

		✓	
--	--	---	--
- Are dusty activities rescheduled during high-wind conditions?

	✓		
--	---	--	--
- Are the routing of vehicles and positioning of construction plants at maximum possible distance from the ASRs?

	✓		
--	---	--	--
- Is suitable buffer zone provided and work areas fenced off with hoarding (not less than 2.4m from ground level)?

		✓	
--	--	---	--

S7.24

Drilling & Blasting

	• Is watering carried out on the exposed area after blasting?	☐	☒	☐	☐	
	• Is vacuum extraction drilling method used?	☐	☒	☐	☐	
	• Is the blasting process carefully sequenced?	☐	☒	☐	☐	
	• Is the firing of explosive carried out in the morning prior to opening of the Park?	☐	☒	☐	☐	
S7.25	Crushing Plant					
	• Is water sprayed on the crusher?	☐	☒	☐	☐	
	• Are fabric filters installed for the crushing plant?	☐	☒	☐	☐	
	• Is chute or dust curtain used for controlling dust when transferring materials from crusher to the conveyors?	☐	☒	☐	☐	
S7.26	Barging Point & Conveyor Belt System					
	• Are the conveyors placed within enclosed structures?	☐	☒	☐	☐	
	• Is profiled steel cladding provided at two sides of loading point?	☐	☒	☐	☐	
	• Are dust suppression sprays installed and operated at the feeding inlet and outlet?	☐	☒	☐	☐	
	• Is the barging point placed within an enclosed structure incorporating an enclosed chute for material transfer to the barge?	☐	☒	☐	☐	
	• Is a flexible curtain hanged on the enclosed chute to prevent dust emission when excavated materials/rocks transported into the barge?	☐	☒	☐	☐	

Water Quality

S8.3	Site Run-off and Drainage					
	• Are all sewer and drainage connections sealed to prevent debris, soil, sand etc. from entering public sewer before commencing any site formation work?	☐	☐	☒	☐	
	• Are temporary ditches provided to facilitate runoff discharge into appropriate watercourses, via appropriate sized silt retention pond?	☐	☐	☒	☐	
	• Are cut-off ditches provided for all major site clearance/excavation works where soils would be exposed to control runoff from the areas?	☐	☐	☒	☐	
	• Are channels, earth/concrete bunds and sand bags deployed to direct surface runoff?	☐	☐	☒	☐	
	• Are catchpits and perimeter channels constructed in advance of relevant site formation works?	☐	☐	☒	☐	
	• Are the boundaries of earthworks marked and surrounded by dykes or embankments for flood protection?	☐	☐	☒	☐	
	• Are sand/silt traps and sediment basins provided to remove sand/silt particles from runoff?	☐	☐	☒	☐	
	• Are silt removal facilities, channels and manholes maintained and deposited silt/grit removed regularly to ensure that these facilities are functioning properly at all times?	☐	☐	☐	☒	CS-1 (2) P1020780
	• Are exposed soil surfaces covered?	☐	☐	☐	☐	
	• Is the water pumped out from foundation excavations discharged into silt removal facilities?	☐	☐	☐	☐	
	• Are exposed soil areas minimised to reduce potential for increased siltation and contamination of runoff?	☐	☐	☐	☐	

- Are earthwork final surfaces well compacted and is subsequent permanent work or surface protection performed immediately?

		✓	
--	--	---	--

CI05 ① P1020784 & P1020788

- Is the rainwater pumped out from trenches or excavation directed to silt removal facilities before discharge?

			✓
--	--	--	---

CS01 ① P1020773 & P1020774

- Are open stockpiles of construction materials or construction wastes of more than 50m³ covered with tarpaulin during rainstorm?

	✓		
--	---	--	--

In case of an excavation in rainy seasons:

- Is temporary exposed slope/soil surfaces covered by tarpaulin as far as practicable?

		✓	
--	--	---	--

- Are intercepting channels provided to prevent storm runoff from washing across exposed soil surfaces?

		✓	
--	--	---	--

- Are surface protection measures and arrangements implemented to prepare for arrival of a rainstorm?

		✓	
--	--	---	--

S8.4 Coral Sites

- Are enhanced (with the use of flocculants added) sand/silt removal facilities employed for treatment of runoff from the major excavation at the Summit?

	✓		
--	---	--	--

- Is a silt curtain system used to enclose the construction phase discharge point at Tai Shue Wan?

		✓	
--	--	---	--

- Are debris and refuse collected, handled and disposed of properly to avoid entering any nearby water bodies and public drainage system?

		✓	
--	--	---	--

- Are stockpiles of cement and other construction materials kept covered when not being used?

	✓		
--	---	--	--

- Are oils and fuels used and stored in designated areas which have pollution prevention facilities (Fuel tanks and storage areas provided with locks and sited on sealed areas, within bunds of a capacity equality to 110% of the storage capacity of the largest tank)?

	✓		
--	---	--	--

- Are temporary sanitary facilities, such as portable chemical toilets, employed on-site where necessary to hand sewage from the workforce? Is a licensed contractor employed for disposal of waste matter and maintenance of these facilities?

		✓	
--	--	---	--

- Is a reputable waste collector should be employed by the Contractor to remove general refuse from the site, separately from construction and chemical wastes, on a daily basis to minimize odour, pest and litter impacts. Burning of refuse on construction sites is prohibited by law?

		✓	
--	--	---	--

- Are aluminium cans recovered from the waste stream and collected separate labelled bins?

		✓	
--	--	---	--

- Are office wastes reduced through the recycling of paper?

		✓	
--	--	---	--

- Are training provided to workers on site cleanliness & waste management procedure?

		✓	
--	--	---	--

Cultural Heritage

- S10.6 If there is any work planned within one metre of the grave, is a one metre buffer zone provided around the grave and is the grave demarcated by temporary fence?

		✓	
--	--	---	--

Hazard to Life

S11.3 Good Site Practices:

- Is the area around the magazine free of vegetation?

	✓		
--	---	--	--

- Is the control of (small) fires planned and provided through the following?

- Weekly checking of fire fighting equipment and the on-site fire water tank level.

	✓		
--	---	--	--

- Daily checking of all critical safety equipment on vehicle, including the fire extinguishers.

	✓		
--	---	--	--

- Maintaining back-up means of fighting fire on the explosive vehicles.

	✓		
--	---	--	--

- Providing safety training for drivers and other personnel present during explosive delivery with regard to operating fire hydrants and fighting of explosive fires.

	✓		
--	---	--	--

- Is the magazine secured against unauthorised entry and theft of explosive through the following?

- Maintaining a list of persons authorised to enter the magazine and ensuring the list is available to the magazine security guard.

	✓		
--	---	--	--

- Activating an alarm system that limits times at which explosive can be removed from the magazine and connecting the system to central security station.

	✓		
--	---	--	--

- Incorporating "Duress code" function in the alarm system.

	✓		
--	---	--	--

- Maintaining alarm system in good condition.

	✓		
--	---	--	--

- Is the magazine security guard located separately from the magazine complex?

	✓		
--	---	--	--

- Is the communication maintained in emergency with the following measures?

- Providing non-hazardous electronic equipment for persons working within 60 m of detonators.

	✓		
--	---	--	--

- Ensuring availability of phone numbers for all key personnel.

	✓		
--	---	--	--

- If there is a typhoon signal no. 3 or above, or black rainstorm signal, are all operations at magazine and transport ceased?

	✓		
--	---	--	--

- Is the risk of detonators explosion on vehicle reduced during transit through the following?

- Ensuring that magazine within vehicle is lined.

	✓		
--	---	--	--

- Limiting off-site transport to 5 to 6 a.m. each day.

	✓		
--	---	--	--

- Escorting vehicles with separate security vehicle when using the public road.

	✓		
--	---	--	--

- Ensuring that UN 1.4B packaging of detonators remains intact until handed over at blasting site.

	✓		
--	---	--	--

- Is the fuel isolation switch available on vehicle to prevent fire spreading in case a fire breaks out?

	✓		
--	---	--	--

- Is an experienced driver with accident-free record employed for explosive vehicle and security escort?

	✓		
--	---	--	--

- Are the drivers checked for health before employing?

	✓		
--	---	--	--

- Are the vehicles regularly checked to maintain in good condition to reduce chance of accident due to breaking down?

	✓		
--	---	--	--

- Is the truck fuel fire escalating to cause explosion avoided through the following means?

- Ensuring that the Contractor is aware of the potential hazards to site.

	✓		
--	---	--	--

- Maintaining appropriate fire fighting equipment.	☒	☐	☐	☐
- Requiring the Contractor to plan and make emergency arrangements.	☒	☐	☐	☐
• Is spare/redundant fire fighting equipment provided?	☒	☐	☐	☐
• Can communications be maintained between two vehicles (drivers and security) during the trip to prevent collision of two explosive vehicles in case of an accident?	☒	☐	☐	☐
• Are the processes of checking of condition of drivers to suspend any driver of concern carried out?	☒	☐	☐	☐
Project specific measures:				
• Is the speed of vehicle limited along the Ocean Park portion of Nam Long Shan Road within 100 m of the explosives magazine to 25 km/hr?	☒	☐	☐	☐
• Is other contractors' use of the Ocean Park Internal service road restricted during delivery of explosives, i.e. 6 to 7 a.m?	☒	☐	☐	☐
• Is the Ocean Park guard required to call to the magazine guard on an hourly basis when explosives are stored in magazines?	☒	☐	☐	☐
• Is the evacuation of part or all of Ocean Park Headland Area arranged in case of the explosive magazine being engulfed in fire?	☒	☐	☐	☐
• Is the risk to the public from accidental initiation during charging and blasting limited by the following means?				
- Closing the Ocean Park from commencement of charging holes until completion of blasting each day.	☒	☐	☐	☐
- Arranging for relevant authorities to post notices to mariners – warning them of blasting operations and advising them to stay away from a strip 100m wide immediately to the east of Headland from commencement of charge holes until completion of blasting each day (i.e. 9 a.m).	☒	☐	☐	☐
- Not operating amusement rides in the event of accidental explosion until confirmed free of critical damage.	☒	☐	☐	☐
• If unexploded explosives are found in blasthole(s), is the opening of Ocean Park delayed or is part of the Ocean Park delayed when there are unspent explosives?	☒	☐	☐	☐
• Is the opportunity for arson/deliberate initiation of explosive reduced with the following means?				
- Paying attention to the security alert status from the Government.	☒	☐	☐	☐
- Developing a security plan to address high alert level.	☒	☐	☐	☐
• Is an emergency plan developed to address uncontrolled fire in magazine area?	☒	☐	☐	☐
• Is the transfer of explosives between 5 to 6 a.m agreed by Mines Division?	☒	☐	☐	☐
• Is the road surface along the explosive transportation route maintained?	☒	☐	☐	☐
• Are the contractor's driver and security escort tested in respect of safety plan? Is the route driven before the driver undertakes the first delivery of explosives?	☒	☐	☐	☐
• Is adequate space provided for the explosive vehicle to manoeuvre without reversing close to the magazine to limit	☒	☐	☐	☐

the likelihood of vehicle accident?

	✓		
--	---	--	--

- Is lighting for explosive vehicles provided on temporary road(s)?

	✓		
--	---	--	--

- S11.4
- Is ammonium nitrate emulsion (ANE) delivered outside of Park opening times?

	✓		
--	---	--	--

Observations for last month

All items from last month were closed.

Observations for the month

- ① Stagnant water ponds on-site shall be removed by pumps as soon as possible
- ② Sedimentation Tank shall be maintained move frequently.

IEC Representative

Environmental Manager

Contractor's
Representative
CS01

Florence Yuen

(Florence Yuen)

Terence Kong

(Terence Kong)

7/5

(Ronald Fung)

Observations for last month

All items from last month were closed except the following;

Hong Kong School of Motoring and Next to Go Cart

- ① Stagnant water was still observed due to rainstorm and shall be removed by pumps as soon as possible

Observations for this month

Ramp next to Panda House

- ② Haul road was dry and dusty and shall be sprayed with water more frequently to suppress dust.

Adit Portal

- ③ Waste skip was full and ^{accumulated with} waste, ~~were accumulated~~ ^{Waste} shall be removed from the skip as soon as possible

IEC Representative

Environmental Manager

Contractor's
Representative
CI05

Florence Yuen

(Florence Yuen)

Terence Kong

(Terence Kong)

Schroeder Tam

(Schroeder Tam)

Ocean Park Master Redevelopment Project
Contract P007
Independent Environmental Checker
MONTHLY SITE INSPECTION PHOTOS

Contract CI05 Site formation, Funicular Tunnel and Miscellaneous Works			
Follow up observations in April 2007			
Observation in last site inspection		Observation in this site inspection	
Adit Portal			
			
P1020534: Exposed site surfaces appear dry. The Contractor was reminded to provide water spray more frequently.		Closed – P1020801: Exposed site surfaces were covered with tarpaulin sheets.	
Southern Access Road			
			
P1020530: Refilling was in operation. The Contractor was reminded to provide a drip tray or tarpaulin to avoid oil spillage.		Closed - P1020795: Refilling activity was not observed during the site inspection.	
Stockpiling Area & Maunsell's Permanent Site Office (HKSM)			
			

**Ocean Park Master Redevelopment Project
Contract P007
Independent Environmental Checker**

MONTHLY SITE INSPECTION PHOTOS

			
P1020538 & P1020555: Stockpile and exposed slope surfaces were partly covered. The Contractor was reminded to cover them entirely and properly with tarpaulin.		Closed - P1020782 & P1020805: Stockpile was covered with tarpaulin sheets properly while exposed slope surfaces were being hydroseeded.	
Nam Long Shan Road			
		N/A	
P1020539: Dust was observed generated from soil nailing activities. The Contractor was reminded to provide dust suppression measure during dusty operation.		Closed - Soil nailing activities was not in operation during the site inspection.	
DBJV's Permanent Site Office			
			
P1020548: Accumulation of waste was observed. The Contractor was reminded to remove them as soon as possible.		Closed - P1020808: Waste was not longer accumulated around the waste skip.	
Maunsell's Permanent Site Office (HKSM)			
			

**Ocean Park Master Redevelopment Project
Contract P007
Independent Environmental Checker**

MONTHLY SITE INSPECTION PHOTOS

P1020554: Stagnant water pond was observed. The Contractor was reminded to remove it as soon as possible		P1020784: Stagnant water was still observed due to rainstorm and shall be removed by pumps as soon as possible.	
Southern Access Road and Waterfront			
			
P1020531: The Contractor was reminded to provide water spray to haul roads more frequently to suppress dust.		Closed - P1020797: Water spray was provided to haul roads to suppress dust.	
Observations in May 2007			
Next to Go Cart		Ramp next to Panda House	
			
P1020788: Stagnant water was observed due to rainstorm and shall be removed by pumps as soon as possible		P1020787: Haul road was dry and dusty and shall be sprayed with water more frequently to suppress dust.	
Adit Portal			
			
P1020803: Waste skip was full and accumulated with waste. Waste shall be removed from the skip as soon as possible.			

**Ocean Park Master Redevelopment Project
Contract P007
Independent Environmental Checker
MONTHLY SITE INSPECTION PHOTOS**

Contract CS01 Back of House for Marine Mammal Veterinary Hospital			
Follow up observations in April 2007			
Observation in last site inspection		Observation in this site inspection	
			
P1020563: The Contractor was reminded to post the Environmental Permit at the site entrance.		Closed - P1020769: The Environmental Permit was posted at the site entrance.	
			
P1020566: Dust was observed generated from rock breaking activities. The Contractor was reminded to provide water spray during dust generating activities.		Closed – P1020775: Rock breaking activity was not in operation during the site inspection.	
			
P1020568: Haul road was dry and dusty. The Contractor was reminded to provide water spray to suppress dust.		Closed - P1020771: Water spray was provided to haul roads to suppress dust.	

Ocean Park Master Redevelopment Project
Contract P007
Independent Environmental Checker
MONTHLY SITE INSPECTION PHOTOS

			
P1020570: The Contractor was reminded to cover the exposed slope surfaces with tarpaulin.		Closed – P1020772: Exposed slope surfaces were covered by tarpaulin sheets.	
Observations in May 2007			
			
			
P1020773 & P1020774: Stagnant water ponds on-site shall be removed by pumps as soon as possible.		P1020780: Sedimentation tank shall be maintained more frequently.	

Part 2 CI-05 EM&A REPORTS (May 2007)

TABLE OF CONTENTS

	Page
EXECUTIVE SUMMARY	1
1. INTRODUCTION	1
Purpose	1
Background	1
Project Organisation	2
Construction Works undertaken during the Reporting Month	2
Compliance with EP conditions	2
Summary of EM&A Requirements	3
2. AIR QUALITY MONITORING	4
Monitoring Requirements	4
Monitoring Equipment	4
Monitoring Parameters, Frequency and Duration	4
Monitoring Locations	4
Monitoring Methodology	4
Results and Observations	5
3. NOISE MONITORING	7
Monitoring Requirements	7
Monitoring Equipment	7
Monitoring Parameters, Frequency and Duration	7
Monitoring Locations	7
Monitoring Methodology	7
Results and Observations	8
4. TERRESTRIAL ECOLOGY	9
Monitoring Requirements	9
Monitoring Parameters, Frequency and Duration	9
Monitoring Locations	9
Monitoring Methodology	9
Results and Observations	9
5. SUBTIDAL MONITORING	10
Monitoring Requirement	10
Monitoring Parameters, Frequency, Schedule	10
Monitoring Locations	10
Monitoring Procedures	10
Results and Observations	10
6. ENVIRONMENTAL AUDIT	11
Site Environmental Audit	11
Review of Environmental Monitoring Procedures	11
Status of Environmental Licensing and Permitting	11
Implementation Status of Environmental Mitigation Measures	13

Implementation Status of Event/Action Plans	13
Implementation Status of Environmental Complaint Handling Procedures	14
7. FUTURE KEY ISSUES	15
Key Issues for the Coming Month	15
Monitoring Schedules for the Next Month	15
Construction Program for the Next 3 Months	15
8. CONCLUSIONS AND RECOMMENDATIONS	16
Conclusions	16
Recommendations	16

List of Tables

Table 1.1	Amounts of Waste Generated in the reporting of May 2007	2
Table 1.2	Environmental Permit Submission	2
Table 2.1	TSP Monitoring Equipment	4
Table 2.2	Air Quality Monitoring Parameters and Frequency	4
Table 2.3	Location of Air Quality Monitoring Stations	4
Table 2.4	Monitoring Results of 1-hr TSP	6
Table 2.5	Monitoring Results of 24-hr TSP	6
Table 3.1	Noise Monitoring Equipment	7
Table 3.2	Noise Monitoring Parameters, Period and Frequency	7
Table 3.3	Noise Monitoring Locations	7
Table 3.4	Monitoring Results of Daytime Noise	8
Table 6.1	Summary of Environmental Licensing and Permit Status	12

List of Figures

Figure 1.1	Project Organization
Figure 1.2	Layout of Work Site (Waterfront)
Figure 1.3	Layout of Work Site (Summit) and Location of Terrestrial Ecology Monitoring
Figure 1.4	Locations of Air Quality and Noise Monitoring Stations
Figure 5.1	Locations of Subtidal Monitoring Stations

List of Appendices

Appendix A	Action and Limit Levels
Appendix B	Environmental Monitoring Schedules
Appendix C	Air Quality Monitoring Results
Appendix D	Noise Monitoring Results
Appendix E	Calibration Details
Appendix F	Summary of Environmental Mitigation Implementation Schedule
Appendix G	Event and Action Plans
Appendix H	Complaint Flow Diagram and Complaint Log
Appendix I	Construction Programme
Appendix J	Contacts of Key Environmental Personnel

EXECUTIVE SUMMARY

This is the [third](#) monthly Environmental Monitoring and Audit (EM&A) report prepared by Dragages Bouygues JV (DBJV), the Contractor Environmental Team (CET), for the Ocean Park Master Redevelopment Project Contract CI05 – Site Formation, Funicular Tunnel and Miscellaneous Works. This report presents the results of EM&A works conducted in the reporting month of [May 2007](#) (from [26 April 2007](#) to [25 May 2007](#)).

In the reporting month, the following construction activities took place:

Waterfront

- Utilities Diversion;
- Grouting Works;
- Pipe Pile;
- Excavation;
- Demolition;
- Enhancement of Pond 35;
- EVA;
- Waterfront Access Road.

Summit

- Site formation at Adit Portal;
- Slope Stabilization;
- Rock Fall Fence;
- Utilities Diversion;
- Haul Road Formation & Excavation;
- Temporary Drainage, Sedimentation tank & WetSep Installation;
- Crusher platform and conveyor belt footing erection.

Tai Shue Wan

- Conveyor belt footing;
- Access road for conveyor footing.

Nam Long Shan Road Entrusted Work

- Sewage works.

The total disposal volume to the barging point, public fill and the sorting facilities in the reporting month of [May 2007](#) was [3664.57](#) tonnes, [43.43](#) tonnes and [180.99](#) tonnes while the volume to the landfills was [51.31](#) tonnes. Apart from the above, the disposal to the alternative dumpsite and internal has commenced within the reporting month of [May 2007](#). The total disposal volume to the Green Valley was approx. [610](#) tonnes.

Monitoring of 1-hour & 24-hour Total Suspended Particulates (TSP) and noise were performed and the results were checked and reviewed. Site inspections were conducted on weekly basis. The implementation of the environmental mitigation measures, Event and Action Plans and environmental complaint handling procedures were also checked.

Environmental Monitoring Works

Environmental Monitoring and Audit Progress

A summary of monitoring and audit activities conducted in the reporting period is listed below:

1-hour TSP monitoring	14 sessions for air quality monitoring station AM1;
	15 sessions for air quality monitoring station AM2; and

	13 sessions for air quality monitoring station AM3
24-hour TSP monitoring	4 sessions for air quality monitoring stations AM1 & AM3; and 5 sessions for air quality monitoring station AM2
Daytime noise monitoring	4 sessions for all noise monitoring stations
Evening and night time noise monitoring	0 sessions for all noise monitoring stations
Holiday time noise monitoring	0 session for all noise monitoring stations
Terrestrial ecology monitoring	0 session
Subtidal monitoring	0 session
Joint environmental site inspection	6 sessions (include the IEC audit)

Air Quality

The air quality monitoring results obtained in the reporting period of [May 2007](#) were audited for the compliance of the Action and Limit levels proposed in the Project Baseline Air Quality and Noise Monitoring Report (rev. B), which were issued in February 2007 and the audit finding showed no exceedance was recorded.

Noise

The noise monitoring results obtained in the reporting period of [May 2007](#) were audited for the compliance of the Action and Limit levels proposed in the Project Baseline Air Quality and Noise Monitoring Report (rev. B), which were issued in February 2007 and the audit finding showed that no exceedance was recorded.

Terrestrial Ecology

No terrestrial monitoring was conducted in the reporting period of [May 2007](#) since the transplantation proposal has been submitted in early May 2007 and waiting for the approval.

Subtidal Monitoring

No subtidal ecology survey was conducted in the reporting period of [May 2007](#).

Environmental Licensing and Permitting

Permits granted to the Project include the Environmental Permit for the Project, Construction Noise Permits and Chemical Waste Producer. Information of these permits is provided in Table 6.1.

Implementation Status of Environmental Mitigation Measures

Dust generated by vehicle movement was observed, both Waterfront and Summit areas. Water hoses were deployed for the haul road watering; water sprinklers were in operation in some of the working areas. The Contractor was reminded to keep watering the haul road and working area surfaces once the surfaces are dry, especially during the hot sunny days.

Anti-mosquito agent has been applied in all Works Areas and cleaned up stagnant water regularly in order to reduce the possibility of mosquito breeding.

Wheel wash by water hose was applied at Summit currently and the installation of wheel washing bay would be undertaken after the completion of site formation. Wheel washing bay has been installed at Waterfront and in use.

Movable noise panels have stored on site and will use wherever necessary.

The disposal of C&D wastes by using both the Chits and trip tickets have been implemented in [May 2007](#). The C&D waste were disposed of to the sorting facilities or landfill while the C&D materials were disposed of to the public fill, temporary public filling barging point or alternative dumpsite.

General wastes were collected by a waste skip near the temporary site office in a regular basis. The frontline staff was reminded to keep good housekeeping in order to avoid waste accumulation.

Environmental Non-conformance

No public complaint, warning from OPC or PMR, summons or prosecution related to environmental issues was made against the Ocean Park Master Redevelopment Project Contract CI05 in the reporting period of [May 2007](#).

Future Key Issues

Key issues to be considered in the coming month include:

- Noise from operating equipment and machinery on-site.
- Construction waste management at temporary construction waste area.
- Avoid accumulation of stagnant / muddy water on-site.
- To implement dust suppression measures on dry surfaces.
- Provision of treatment to turbid water (control the SS level) from activities on-site before discharge.

1. INTRODUCTION

Purpose

- 1.1 The purpose of this report is to present the EM&A work carried out during [May 2007](#) (from [26 April 2007](#) to [25 May 2007](#)) with respect to Ocean Park Master Redevelopment Project Contract No. CI05 – Site Formation, Funicular Tunnel and Miscellaneous Works.

Background

- 1.2 Ocean Park planned to upgrade and expand the existing area to meet the anticipated visitor demands and to position Ocean Park as a premium tourist attraction and a regional leader in the themed recreational and educational park experience.

- 1.3 The redevelopment works of Ocean Park will involve

- Civil infrastructure works including road works (including modifying sections of Ocean Park Road, which is a local distributor, around the existing bus terminus as shown in Figure 1.1), drain works, tunnelling and geotechnical works, bulk excavation and slope works, retaining structures, site clearance, decommissioning and demolition works, funicular railway, modify to bus terminus, taxi stands and associated facilities.
- Utilities works including power supply distribution, electrical substations, freshwater and saltwater reservoirs, water supply distribution, gas supply distribution, telecommunications network and distribution, landscape irrigation network, etc.
- Primary life support system works for animal keeping.
- Area development works including service roads, EVAs, external escalators, bridges and elevated walkways, external lighting.
- Parkwide systems works including signage, background music system, toilets facilities, guard sheds, first aid facilities, communications systems, CCTV systems and waste facilities.
- Landscape or theming works including exterior building facade treatment works, themed concrete pavement/ hardscape, soft landscaping, water and faux rockwork features, visual intrusion screens, area props and artwork, etc.
- Works for the attractions venues including animal exhibits, marine animal, terrestrial animal, aviaries, bird exhibits, individual life support systems for animal exhibits; and others non-animal related attractions, e.g. shipwreck play area, bamboo maze, etc.
- Installation of rides including thrill rides, round rides, water rides, kids rides, interactive rides, transportation rides, etc.
- Works for the venues including event halls, outdoor live show area, cinemas and bandstands.
- Works for the merchandise / retail facilities including souvenir stores, novelty stores, games arcade, photo shops, etc.
- Works for the food and beverage facilities including restaurants, bakery, food carts and kiosks.
- Back of house facilities including offices, break areas, warehouses, centralized facilities, operational facilities, etc.

Project Organisation

- 1.4 Under the requirement of EM&A Manual and Environmental Permit, the environmental management team should be set up and the structure of the team is shown in Figure 1.1.
- 1.5 Meanwhile the contacts of key environmental personnel for this project are shown in Appendix J

Construction Works undertaken during the Reporting Month

- 1.6 The major construction activities undertaken in May 2007 included utilities diversion; grouting works, pipe pile; excavation; demolition; enhancement of Pond 35, EVA and access road at Waterfront. Site formation at adit portal, slope stabilization, rock fall fence, utilities diversion and haul road formation and excavation; temporary drainage, sedimentation tank & WetSep installation and crusher platform and conveyor belt footing erection at Summit.
- 1.7 At Tai Shue Wan, conveyor belt footing and access road for conveyor footing are on-going and one section of sewage works at Nam Long Shan Road has commenced.
- 1.8 Layout plan of the Project is provided in Figures 1.2 and 1.3.
- 1.9 The amounts of different types of waste generated by the activities of the Project in the reporting month are shown in Table 1.1.

Table 1.1 Amounts of Waste Generated in the reporting of May 2007

Waste Type	Disposal Locations	Estimated Amount (tonnes unless specified)
C&D waste	SENT	51.31
	TKOSF	97.90
	TMSF	83.09
C&D material	QBBP	3664.57
	TKOFB	43.43
	INTL **	830.00
	Green Valley *	3170.00
Chemical waste	Collected by licensed collector	0 L
General waste	Collected by licensed collector	46.5 m ³

Notes: * denotes alternative dumpsite as disposal location.
** denotes internal transfer

Compliance with EP conditions

- 1.10 A summary of the reporting requirement of compliance with EP conditions of Contract CI05 of the Project as of May 2007 were listed in Table 1.2.

Table 1.2 Environmental Permit Submission

Environmental Permit Submission	EP-249/2006/A Condition No.	Status
Management Organization	2.3	Submitted on 15 December 2006.
Construction Programme	2.4	Submitted on 14 February 2007.
Drainage Proposal	2.13	Resubmitted on 14 May 2007.
Silt Curtain Proposal	2.14	Deposited in the EIAO Register Office for public inspection on 01 March 2007.

Environmental Permit Submission	EP-249/2006/A Condition No.	Status
Transplantation Proposal	2.20	Submitted on 14 May 2007 and comments from EPD were received on 30 May 2007.
Waste Management Plan	2.21	Comments from EPD were received on 21 May 2007 and revision is under preparation.
Baseline Air Quality and Noise Monitoring Report	3.2	Submitted on 28 February 2007
Monthly EM&A Report for Apr '07	4.2	Submitted on 12 May 2007

Summary of EM&A Requirements

- 1.11 The EM&A programme requires environmental monitoring for air quality, noise, terrestrial ecology, subtidal and waste management. The EM&A requirements for each parameter are described in subsequent sections, including:
- All monitoring parameters;
 - Action and Limit levels for all environmental parameters;
 - Event-Action Plans;
 - Environmental mitigation measures and their implementation schedule;
 - Environmental requirements in contract documents.
- 1.12 The environmental licensing and permits are described in Section 6.
- 1.13 The advice on the implementation status of environmental protection and pollution control/mitigation measures is summarized in Section 6 of the Report.

2. AIR QUALITY MONITORING

Monitoring Requirements

- 2.1 24-hour & 1-hour TSP monitoring were conducted to monitor the air quality. Appendix A shows the established Action/Limit Levels for the environmental monitoring works.

Monitoring Equipment

- 2.2 High volume samplers (HVS - Model GMWS-2310 Accu-Vol) complete with the appropriate sampling inlets were installed for 24-hour and 1-hour TSP sampling. The HVS composed of a motor, a filter holder, a flow controller and a sampling inlet and its performance specification complies with USEPA Standard Title 40, Code of Federation Regulations Chapter 1 (Part 50 Appendix B). Table 2.1 summarises the equipment that was used in the dust-monitoring programme.

Table 2.1 TSP Monitoring Equipment

Equipment	Model
HVS	GMWS 2310 c/w of TSP sampling inlet
Calibration Kit	Tisch TE-5025 A

Monitoring Parameters, Frequency and Duration

- 2.3 The monitoring parameters and frequency are summarised in Table 2.2. The monitoring schedule for the reporting month is shown in Appendix B.

Table 2.2 Air Quality Monitoring Parameters and Frequency

Location	Parameter	Duration	Frequency
AM1	1-hour TSP	1 hour	3 times every 6 days*
	24-hour TSP	24 hours	Once every six days
AM2	1-hour TSP	1 hour	3 times every 6 days*
	24-hour TSP	24 hours	Once every six days
AM3	1-hour TSP	1 hour	3 times every 6 days*
	24-hour TSP	24 hours	Once every six days

Notes: * denotes three 1-hr TSP monitoring in three days.

Monitoring Locations

- 2.4 In accordance with the EM&A Manual, three air quality monitoring stations, as shown in Figure 1.4, were selected for 24-hour and 1-hour TSP sampling. Table 2.3 describes the location of the air quality monitoring stations.

Table 2.3 Location of Air Quality Monitoring Stations

Air Quality Monitoring Stations	Identity / Description
AM1	Whisker's Theatre, Ocean Park
AM2	San Wai Village, Wong Chuk Hang
AM3	Ocean Park Road, 50m adjacent to Police Training School

Monitoring Methodology

24-hour / 1-hour TSP Monitoring

Installation

- 2.5 The HVSs were installed in the vicinity of the air sensitive receivers. The following criteria were considered in the installation of the HVS.

- A horizontal platform with appropriate support to secure the samplers against gusty wind was provided.
- No two HVSs were placed less than 2 meters apart.
- The distance between the HVS and any obstacles, such as buildings, was at least twice the height that the obstacle protrudes above the HVS.
- A minimum of 2 meters separation from walls, parapets and penthouses was required for rooftop samplers.
- No furnace or incinerator flues were nearby.
- Airflow around the sampler was unrestricted.
- Permission was obtained to set up the samplers and to obtain access to the monitoring stations.

Preparation of Filter Papers by ETS-Testconsult Limited.

- Glass fibre filters, G810 were labeled and sufficient filters that were clean and without pinholes were selected.
- All filters were equilibrated in the conditioning environment for 24 hours before weighing. The conditioning environment temperature was around 25 °C and not variable by more than ± 3 °C; the relative humidity (RH) was < 50% and not variable by more than ± 5 %. A convenient working RH was 40%.

Field Monitoring

- The power supply was checked to ensure the HVS works properly.
- The filter holder and the area surrounding the filter were cleaned.
- The filter holder was removed by loosening the four bolts and a new filter, with stamped number upward, on a supporting screen was aligned carefully.
- The filter was properly aligned on the screen so that the gasket formed an airtight seal on the outer edges of the filter.
- The swing bolts were fastened to hold the filter holder down to the frame. The pressure applied should be sufficient to avoid air leakage at the edges.
- Then the shelter lid was closed and was secured with the aluminum strip.
- The HVS was warmed-up for about 5 minutes to establish run-temperature conditions.
- A new flowrate record sheet was set into the flow recorder.
- The flow rate of the HVS was checked and adjusted at around 1.1 m³/min. The range specified in the EM&A Manual was between 0.6-1.7 m³/min.
- The programmable timer was set for a sampling period of 24 hrs $\pm$ 1 hr or 1 hr + 0.25 hr, and the starting time, weather condition and the filter number were recorded.
- The initial elapsed time was recorded.
- At the end of sampling, the sampled filter was removed carefully and folded in half-length so that only surfaces with collected particulate matter were in contact.
- It was then placed in a clean plastic envelope and sealed.
- All monitoring information was recorded on a standard data sheet.
- Filters were sent to *ETS-Testconsult Ltd.* for analysis.

Maintenance & Calibration

- The HVSs and their accessories are maintained in good working condition, such as replacing motor brushes routinely and checking electrical wiring to ensure a continuous power supply.
- HVSs are calibrated at bi-monthly intervals using GMW-25 Calibration Kit throughout all stages of the air quality monitoring. Calibration details are provided in Appendix E.

Results and Observations

2.6 The air quality monitoring results of 1-hr TSP and 24-hr TSP of the reporting month are summarized in

Tables 2.4 and 2.5. All monitoring data and graphical presentation of the monitoring results are provided in Appendix C. No 1-hr TSP measurements have been conducted on 27 April 2007, 21 & 23 May 2007 and no 24-hr TSP measurement taken on 27 April 2007 and 21 May 2007 at AM1 and AM3 due to power supply failure.

- 2.7 All measured 1-hour & 24-hour TSP concentrations were below the Action and Limit (AL) Levels in the reporting month.

Table 2.4 Monitoring Results of 1-hr TSP

Date of Monitoring	1-hr TSP ($\mu\text{g}/\text{m}^3$)		
	AM1	AM2	AM3
27-Apr-07	x	135	127
30-Apr-07	110	110	130
02-May-07	193	123	190
03-May-07	119	114	126
04-May-07	109	79	103
07-May-07	173	159	191
09-May-07	140	107	191
11-May-07	182	154	173
14-May-07	207	202	214
15-May-07	135	177	211
16-May-07	164	156	278
18-May-07	125	124	172
21-May-07	77	136	x
23-May-07	159	123	x
25-May-07	131	104	143

Notes: * Exceedance of Limit Level
Exceedance of Action Level
x No measurement due to power supply failure

Table 2.5 Monitoring Results of 24-hr TSP

Date of Monitoring	24-hr TSP ($\mu\text{g}/\text{m}^3$)		
	AM1	AM2	AM3
27-Apr-07	x	73	91
03-May-07	63	57	78
09-May-07	70	66	80
15-May-07	54	55	72
21-May-07	51	54	x

Notes: * Exceedance of Limit Level
Exceedance of Action Level
x No measurement due to power supply failure

3. NOISE MONITORING

Monitoring Requirements

- 3.1 Noise monitoring was conducted at four monitoring stations as specified in the EM&A Manual. Appendix A shows the established Action and Limit Levels for noise.

Monitoring Equipment

- 3.2 Integrating Sound Level Meters were employed for noise monitoring. They were Type 1 sound level meters capable of giving a continuous readout of the noise level readings including equivalent continuous sound pressure level (Leq) and percentile sound pressure level (Lx). They comply with International Electrotechnical Commission Publications 651:1979 (Type 1) and 804:1985 (Type 1). Portable electronic wind speed indicator capable of measuring the wind speed in m/s was employed to check the wind speed. Table 3.1 details the noise monitoring equipment used.

Table 3.1 Noise Monitoring Equipment

Equipment	Model
Integrating Sound Level Meter	Rion NL 31
Calibrator	Rion NC-73
Portable Wind Speed Indicator	TSI Model 8340-M Air Velocity Meter

Monitoring Parameters, Frequency and Duration

- 3.3 Noise monitoring was conducted per monitoring day during the daytime. Monitoring to be conducted in the evening and/or night-time only when construction works is in progress. The monitoring period, duration, parameters and frequency of noise measurement are presented in Table 3.2. The monitoring schedule for the reporting month is provided in Appendix B.

Table 3.2 Noise Monitoring Parameters, Period and Frequency

Time Period	Duration (min)	Parameters	Frequency
Daytime (0700 to 1900)	30	Leq	Once a week
*Evening (1900 to 2300)	5		
*Night-time (2300 to 0700 of next day)	5		

Notes: * denotes Noise monitoring to be conducted only when construction work is in progress.

Monitoring Locations

- 3.4 In accordance with the EM&A Manual, noise monitoring was conducted at four designated monitoring stations as shown in Figure 1.4. Table 3.3 describes the locations of these monitoring stations.

Table 3.3 Noise Monitoring Locations

Noise Monitoring Stations	Identity / Description
CN1	Open Area adjacent to Police Training School
CN2	Project Development Office, Ocean Park
CN3	Rinniped House, Ocean Park
CN4	Manly Villa

Monitoring Methodology

Field Monitoring

- The Sound Level Meter was set on a tripod at a height of 1.2 m above the ground.

- For free field measurement, the meter was positioned away from any nearby reflective surfaces. For reference, a correction of +3dB(A) was made to the free field measurements.
- The battery condition was checked to ensure the correct functioning of the meter.
- Parameters such as frequency weighting, the time weighting and the measurement time were set as follows:
 - frequency weighting : A
 - time weighting : Fast
 - time measurement : 30 minutes / 5 minutes
- Prior to and after each noise measurement, the meter was calibrated using a Calibrator for 94 dB at 1000 Hz. If the difference in the calibration level before and after measurement was more than 1 dB(A), the measurement would be considered invalid and repeat of noise measurement would be required after re-calibration or repair of the equipment.
- The wind speed was frequently checked with a portable wind meter.
- During the monitoring period, the L_{eq} was recorded. In addition, site conditions and noise sources were recorded on a standard record sheet.
- Noise measurement was paused during periods of high intrusive noise (e.g. dog barking, helicopter noise) if possible. Observations were recorded when intrusive noise was unavoidable.
- Noise monitoring was cancelled in the presence of fog, rain, wind with a steady speed exceeding 5 m/s, or wind with gusts exceeding 10 m/s.

Maintenance and Calibration

- The microphone head of the sound level meter and calibrator is cleaned with soft cloth at quarterly intervals.
- The meters and calibrators are sent to *Hong Kong Calibration Ltd* to check and calibrate at yearly intervals. Calibration details are provided in Appendix E.

Results and Observations

- 3.5 Noise monitoring was conducted at the 4 designated monitoring stations during daytime in the reporting month. The monitoring was carried out as scheduled in the reporting month of [May 2007](#) and the monitoring results are summarized in Table 3.4. All monitoring data and graphical presentation of the monitoring results are provided in Appendix D.
- 3.6 No exceedance of limit level during daytime recorded in the reporting month.

Table 3.4 Monitoring Results of Daytime Noise

Date of Monitoring	Noise Level, L_{eq} (30-min), dB(A)			
	CN1	CN2	CN3	CN4
30-Apr-07	60.9	63.2	55.7	57.3
07-May-07	63.3	66.1	55.5	54.8
14-May-07	62.6	65.4	56.2	55.2
21-May-07	62.3	60.6	57.0	55.1

Notes: * Exceedance of Limit Level
Exceedance of Action Level

4. TERRESTRIAL ECOLOGY

Monitoring Requirements

- 4.1 Monitoring of the health and condition of the transplanted plant species of conservation interest should be monitored at least once a month during the first 12 months after transplantation.

Monitoring Parameters, Frequency and Duration

- 4.2. Since the transplantation proposal is under preparation, the proposed monitoring frequency and duration would be confirmed after the proposal has been agreed or approved by EPD.

Monitoring Locations

- 4.2 The proposed monitoring location is shown in Figure 1.3.

Monitoring Methodology

- 4.3 Since the transplantation proposal has submitted during the reporting month and waiting for approval, the monitoring methodology would be confirmed after the proposal has been agreed or approved by EPD.

Results and Observations

- 4.4 Since the transplantation proposal has submitted during the reporting month and waiting for approval, no monitoring has been undertaken.

5. SUBTIDAL MONITORING

Monitoring Requirement

- 5.1 Even though the conclusion in the EIA stated that adverse impact on coral communities would not be expected during the construction phase of the Project, coral monitoring shall be conducted as a precautionary measure.

Monitoring Parameters, Frequency, Schedule

- 5.2 Subtidal monitoring is required to be conducted as follows:

- once per month in the first two months in Site 1, Site 2, Site 3, Site 4 and Control Site C.
- twice a month at first three months in Site 5 and Control Site C.
- once per month for the next three months in Site 5 and Control Site C.
- If there is no exceedance, the monitoring frequency would be adjusted to once every three months (i.e. quarterly) until the end of the Contract No CI05 of the Project.

Monitoring Locations

- 5.3 In accordance with the EM&A Manual, subtidal monitoring would be conducted at Tai Shue Wan and Chung Hom Kok. The monitoring locations are shown in Figure 5.1.

Monitoring Procedures

- 5.4 Monitor the tagged corals (ten nos. at each station) for sedimentation, bleaching and mortality.
- 5.5 In the event that there is no exceedance record, the monitoring frequency shall be revised to once in every quarter until the end of the construction phase of CI05.
- 5.6 In the event that there is an exceedance of Action Level record, more frequent monitoring to be carried out until the exceedance stops.
- 5.7 In the event that there is an exceedance of Limit Level record, the Contractor shall suspend all works until an effective solution is identified.

Results and Observations

- 5.8 The purpose of subtidal monitoring is monitor the potential impact during the construction phase of the Project. There was no impact subtidal monitoring conducted within the reporting month of [May 2007](#) since the construction works such as blasting and tunnelling would not be commenced until early June 2007.
- 5.9 The baseline survey has undertaken from 05 April 2007 to 12 April 2007 and the baseline survey report would be submitted by the end of the reporting month of May 2007.

6. ENVIRONMENTAL AUDIT

Site Environmental Audit

- 6.1 Site audit would be carried out once per week to monitor environmental issues on the construction sites to ensure that all mitigation measures were implemented timely and properly.

Review of Environmental Monitoring Procedures

- 6.2 The monitoring works conducted by the monitoring team were inspected regularly. The following observations have been recorded for the monitoring works:

Air Quality Monitoring

- The monitoring team recorded all observations around the monitoring stations within and outside of the construction site.
- The monitoring team recorded the temperature, air pressure and weather conditions on the monitoring day.

Noise Monitoring

- The monitoring team recorded all observations around the monitoring stations, which might affect the monitoring result.
- Major noise sources were identified and recorded. Other intrusive noise attributing to the result was trimmed off by pausing the monitoring temporarily.

Terrestrial Monitoring

- No monitoring since the transplantation proposal has submitted and waiting for approval from EPD and AFCD.

Subtidal Monitoring

- There was no impact subtidal monitoring conducted within the reporting month of [May 2007](#) since the construction works such as blasting and tunnelling would not be commenced until early June 2007.
- The baseline survey has been completed and the report would be submitted by the end of reporting month of [May 2007](#).

Status of Environmental Licensing and Permitting

- 6.3 All permits/licences obtained as of [May 2007](#) are summarised in Table 6.1.

Table 6.1 Summary of Environmental Licensing and Permit Status

Permit No.	Valid Period		Section/Description	Status
	From	To		
Environmental Permit				
EP-249/2006/A	23-Oct-06	N/A	Add a new condition before Condition 2.18 in Part C stated that "To compensate for the loss of roosting site for freshwater birds due to the filling of Pond 37 at Lowland area; complete the enhancement works for Pond 35 and to avoid disturbing the roosting site for freshwater birds, no construction works and discharge from the construction site(s) shall be allowed with the existing freshwater ponds at Tai Shue Wan area". Renumber Conditions 2.19 to 2.25 in Part C of the EP.	Valid
Construction Noise Permits				
GW-RS-0196-07	10-Apr-07	02-May-07	Lorry with crane; Air compressor with noise emission label showing the SWL of $\leq 102\text{dB(A)}$; Rock drill, hand-held (pneumatic); Crane, mobile (diesel); Generator, silenced, 75dB(A) at 7m; Concrete mixer (electric); Grout pump; Concrete lorry mixer; Drill, percussive, hand-held (electric); Poker, vibrating, hand-held (electric); Saw, circular, wood; Breaker, hand-held, mass $\leq 10\text{kg}$; Breaker, excavator mounted (hydraulic); Drill rig, rotary type (diesel)	Expired
GW-RS-0200-07	05-Apr-07	30-Jun-07	Crane, mobile (tracked); Excavator, tracked; Vibratory hammer; Air compressor with noise emission label showing the SWL of 102dB(A) ; Breaker, excavator mounted (hydraulic); Concrete lorry mixer; Poker, vibratory, hand-held (electric); Lorry with crane; Lorry with grab; Generator, silenced, 75dB(A) at 7m; Saw circular, wood; Concrete pump, lorry mounted	Valid
GW-RS-0240-07	04-May-07	30-Jun-07	Ventilation fan; Cherry picker; Generator, silenced, 75dB(A) at 7m; Welding set; Jumbo; Shotcrete machine, Excavator; Dump truck, Rock splitter; Concrete lorry mixer; and Air compressor with noise emission label showing the SWL of $\leq 102\text{dB(A)}$	Valid
GW-RS-0269-07	09-May-07	30-Jun-07	Ariel platform, mobilized; Trailer; Mobile crane (diesel); Lorry with crane	Valid
Chemical Waste Producer Registration				
WPN5213-199-D2373-01	07-May-07	N/A	For disposal of chemical wastes, mainly spent lubricants	Valid
Effluent Discharge License				
Application for Summit sent on 28-Apr-07.				
Specific Process License				
Application sent on 03-Apr-07 and discussion with EPD is in progress.				
Notification of Construction Works under APCO				
Waterfront sent on 31-Jan-07 (ref. 001017998)				
Summit sent on 05-Feb-07 (ref. 001018054)				

Permit No.	Valid Period		Section/Description	Status
	From	To		
Billing Account under Construction Waste Disposal Charging Scheme				
7004888	03-Jan-07	18-Dec-08	For disposal of C&D waste to public fills, sorting facilities and landfills	In use

Implementation Status of Environmental Mitigation Measures

- 6.4 The weekly joint site inspections have conducted on 27 April 2007, 3, 11, 18 & 25 May 2007. The IEC has undertaken the monthly audit on 29 May 2007. During site inspections in this reporting month, the following observations and recommendations were made.

Land Based Water Quality Mitigation Measures

- 6.5 Stagnant water pond was observed after heavy rainfall. The Contractor was reminded to remove the stagnant water as soon as possible in order to minimize the potential mosquito breeding problems.

Air Quality Mitigation Measures

- 6.6 Some access roads were observed dry and the Contractor was reminded to provide water spray to haul roads more frequently to suppress the dust nuisance.
- 6.7 Stockpile and exposed slope surface were partly covered. The Contractor was reminded to cover them entirely and properly with tarpaulin.

Noise

- 6.8 No violation was observed during site inspections in the reporting month of [May 2007](#).

Ecology

- 6.9 Construction activities of Pond 35 would be completed in mid June 2007 tentatively.
- 6.10 No violation was observed during site inspections in the reporting month.

Waste / Chemical Management

- 6.11 Accumulation of waste was observed. However the wastes were collected by licensed haulers and disposed of properly after the move.
- 6.12 The Contractor and relevant party were reminded to provide a drip tray or tarpaulin when storing the oil drums on site.

Landscape and Visual

- 6.13 No violation was observed during site inspections in the reporting month of [May 2007](#).

Environmental Mitigation Implementation Schedule (EMIS)

- 6.14 According to the Environmental Permit, the mitigation measures detailed in the permits are required to be implemented. An updated summary of the EMIS is presented in Appendix F.

Implementation Status of Event/Action Plans

- 6.15 The Event and Action Plans for air quality and noise are presented in Appendix G.
- 6.16 No exceedance of air quality (i.e. 1 hour & 24-hour TSP) was recorded during the reporting month of [May 2007](#).

- 6.17 No exceedance of noise limit level during daytime was recorded in the reporting month of [May 2007](#).

Implementation Status of Environmental Complaint Handling Procedures

Summary of the Complaints and Prosecutions

- 6.18 Appendix H presents the environmental complaint flow diagram of the Project.
- 6.19 No complaint, summons or prosecution related to environmental issues was received or made against the Project in [May 2007](#).

7. FUTURE KEY ISSUES

Key Issues for the Coming Month

7.1 Key issues to be considered in the coming month include:

- Noise from operating equipment and machinery on-site.
- Maintenance of silt curtains.
- Construction waste management at the demolition work areas.
- Avoid accumulation of stagnant / muddy water on-site.
- To implement dust suppression measures on dry surfaces.
- Provision of treatment to turbid water from activities on-site before discharge.

Monitoring Schedules for the Next Month

7.2 The environmental monitoring schedules for the next month are shown in Appendix B.

Construction Program for the Next 3 Months

7.3 The construction programme for the next 3 months is shown in Appendix I.

8. CONCLUSIONS AND RECOMMENDATIONS

Conclusions

- 8.1 Environmental impact monitoring was performed in [May 2007](#). All monitoring results in the reporting month were checked and reviewed.
- 8.2 No exceedances of Action and Limit Level for daytime noise, 24-hour TSP and 1-hour TSP were recorded in the reporting month.
- 8.3 There was no impact subtidal monitoring conducted within the reporting month of [May 2007](#) since the construction works such as blasting and tunnelling would not be commenced until early June 2007.
- 8.4 The baseline survey has completed and the survey report will submit by the end of reporting month of [May 2007](#).
- 8.5 No complaint, summons or prosecution related to environmental issues were made against the Project in the reporting period.

Recommendations

- 8.6 According to the environmental audit performed in the reporting month, the following recommendations are made:

Air Quality Impact


- To prohibit any open burning on site.
- To regularly maintain the machinery and vehicles on site.
- To follow up any exceedance caused by the construction works.
- To implement dust suppression measures on dry surfaces.

Noise Impact

- To inspect the noise sources from inside and outside of the site.
- To follow up any exceedance caused by the construction works.
- To space out noisy equipment and position as far away as possible from sensitive receivers.
- To have regular maintenance of vessels and equipment used.


Waste/Chemical Management

- To check for any accumulation of waste materials or rubbish on site.
- To avoid any discharge of chemical waste or oil directly from the site.
- To regularly and properly collect, store and dispose of all waste types, including floating refuses at the sea.

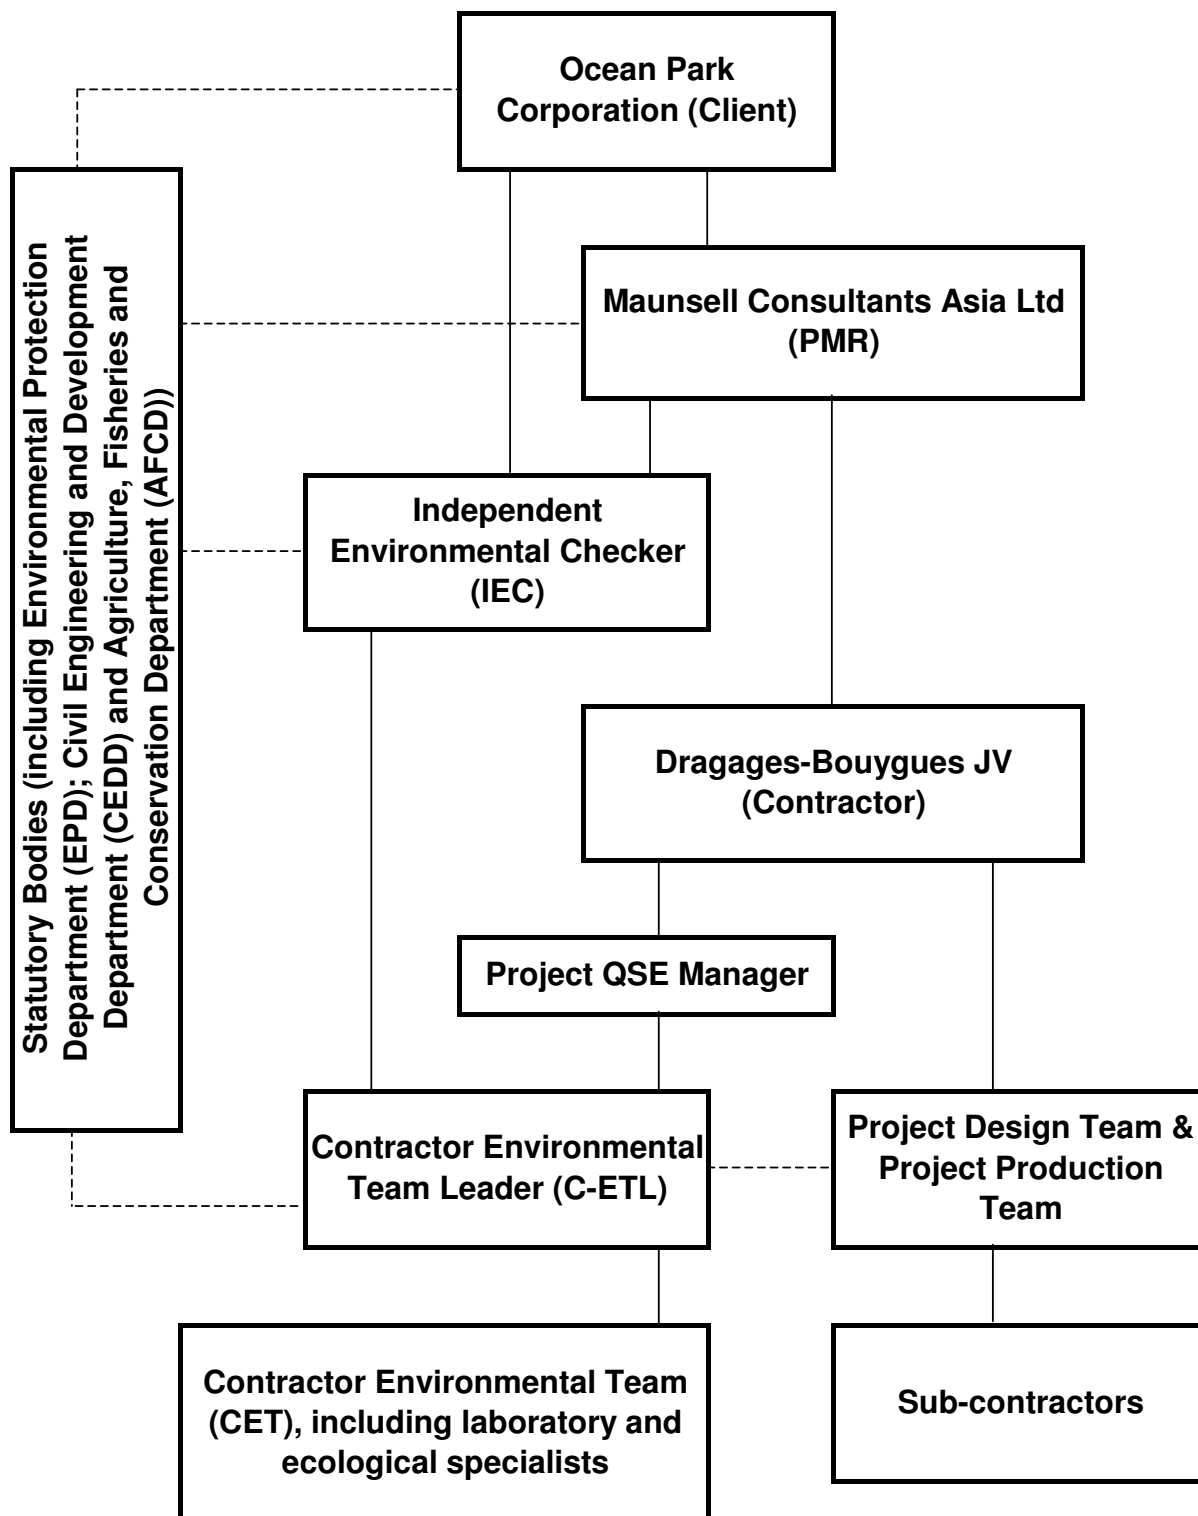


LEGEND:

- Line of Communication
- Line of Authority

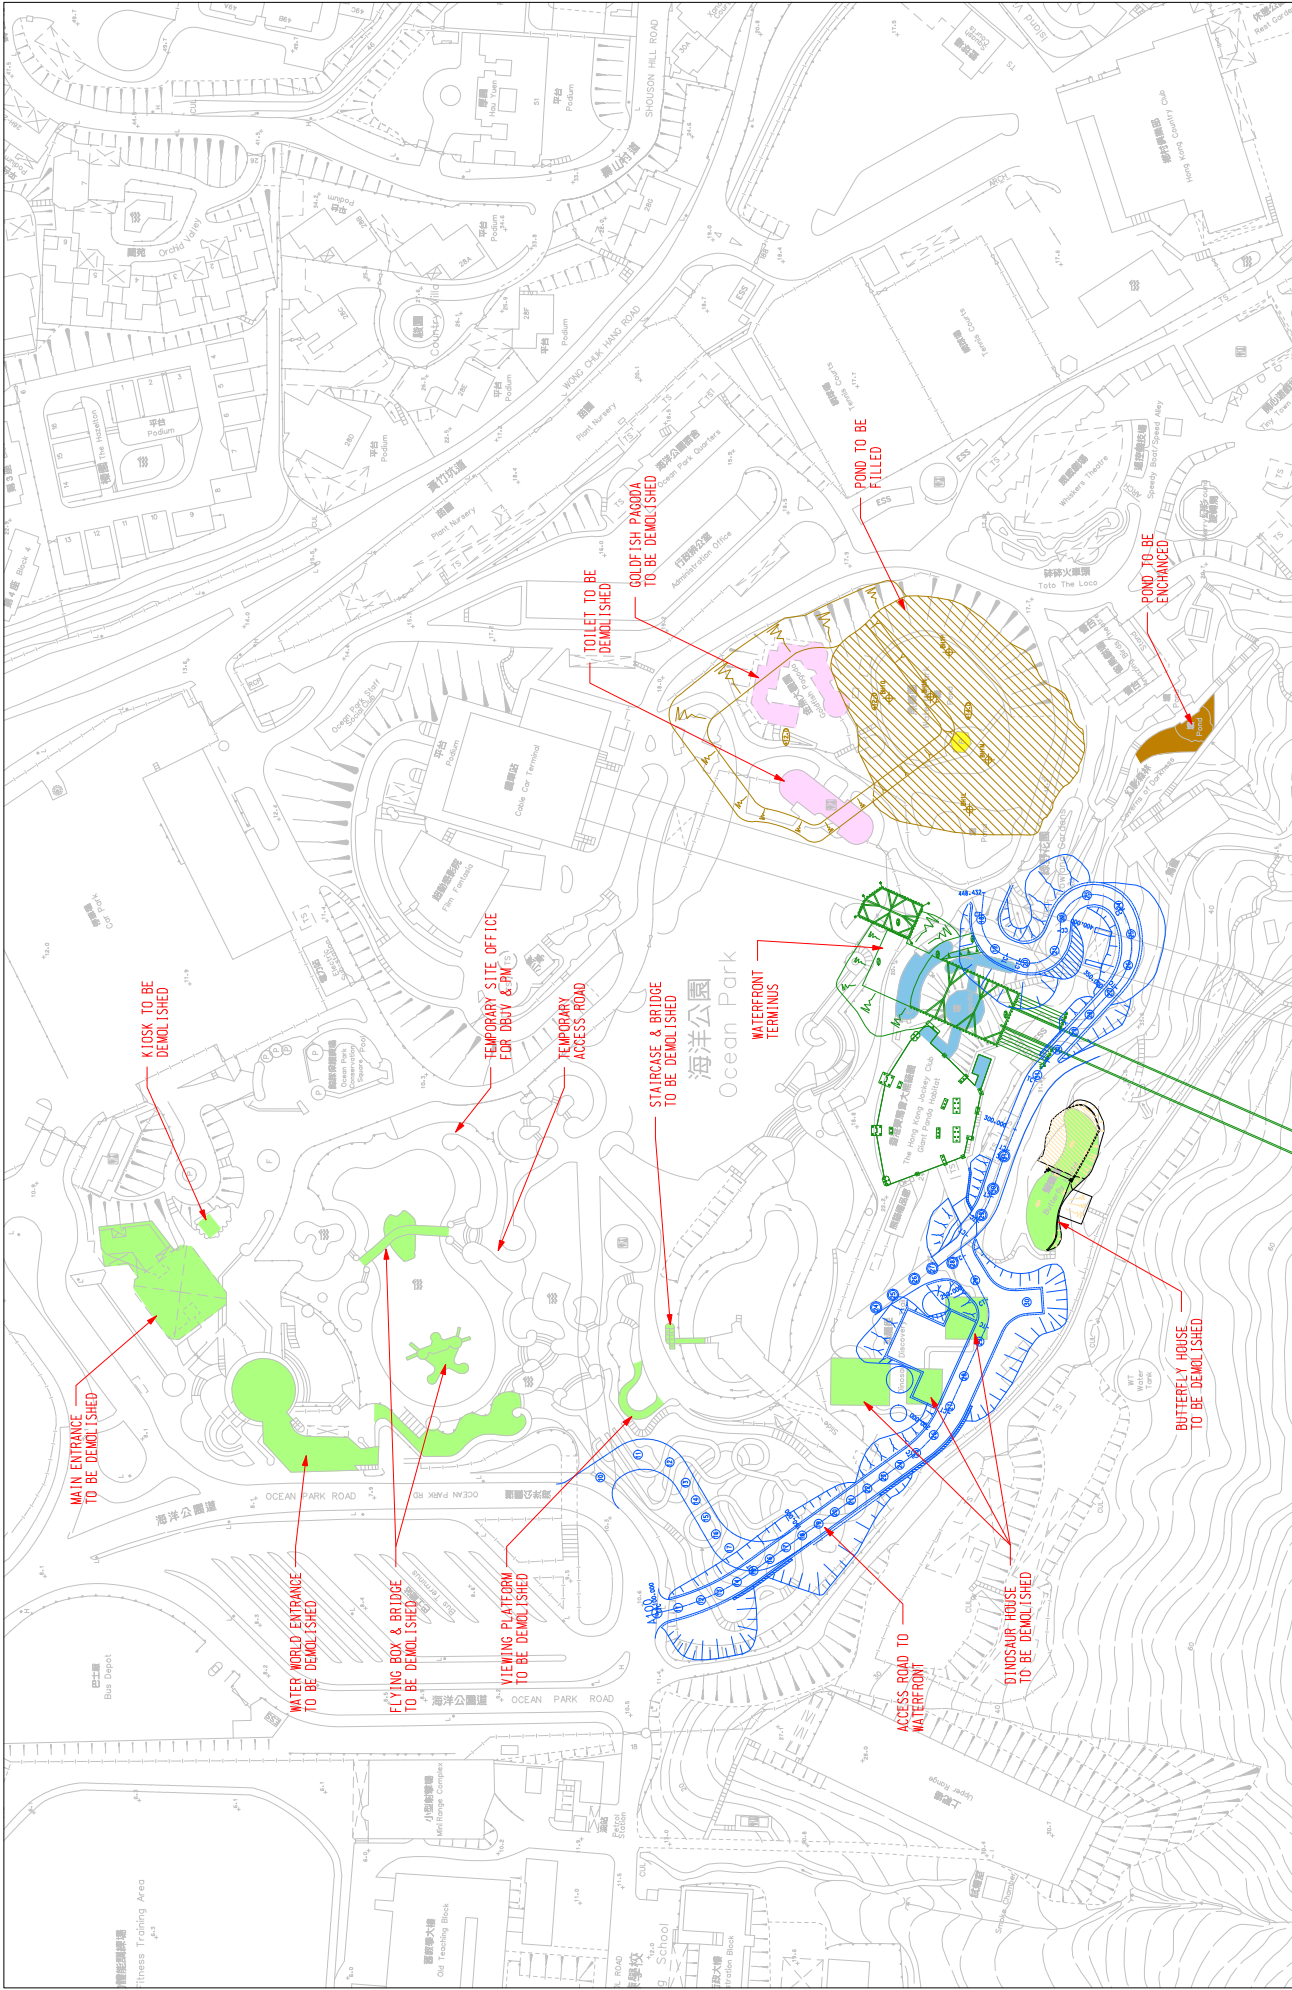

DESIGNED BY				CHECKED BY				DATE			
B.C.				B.C.				03/04/2007			
DRAWN BY				CHECKED BY				DATE			
D.C.				IN CHARGE				03/04/2007			
PROJECT NO.				PROJECT NAME				PROJECT NO.			
03/04/2007				OCEAN PARK REDEVELOPMENT				03/04/2007			
DATE				DRAWING NUMBER				DATE			
03/04/2007				DBJ/C105/01/ENV/0013				03/04/2007			
REV.				SCALE				SCALE			
A				1 : 1500 @ A3				1 : 1500 @ A3			
PROJECT TITLE				DRAWING TITLE				PROJECT TITLE			
OCEAN PARK REDEVELOPMENT				FIGURE 1.2				OCEAN PARK REDEVELOPMENT			
Contract No. C105				LAYOUT OF WORK SITE				Contract No. C105			
Site Formation, Funicular Tunnel				(WATERFRONT)				Site Formation, Funicular Tunnel			
and Miscellaneous Works								and Miscellaneous Works			
CLIENT				PROJECT TITLE				CLIENT			
香港海洋公園				OCEAN PARK HONG KONG				香港海洋公園			
OCEAN PARK HONG KONG								OCEAN PARK HONG KONG			
CONSULTANT								CONSULTANT			
D								D			
Dropgear Bouygues JV								Dropgear Bouygues JV			
實業-布依格聯營								實業-布依格聯營			
Bouygues								Bouygues			

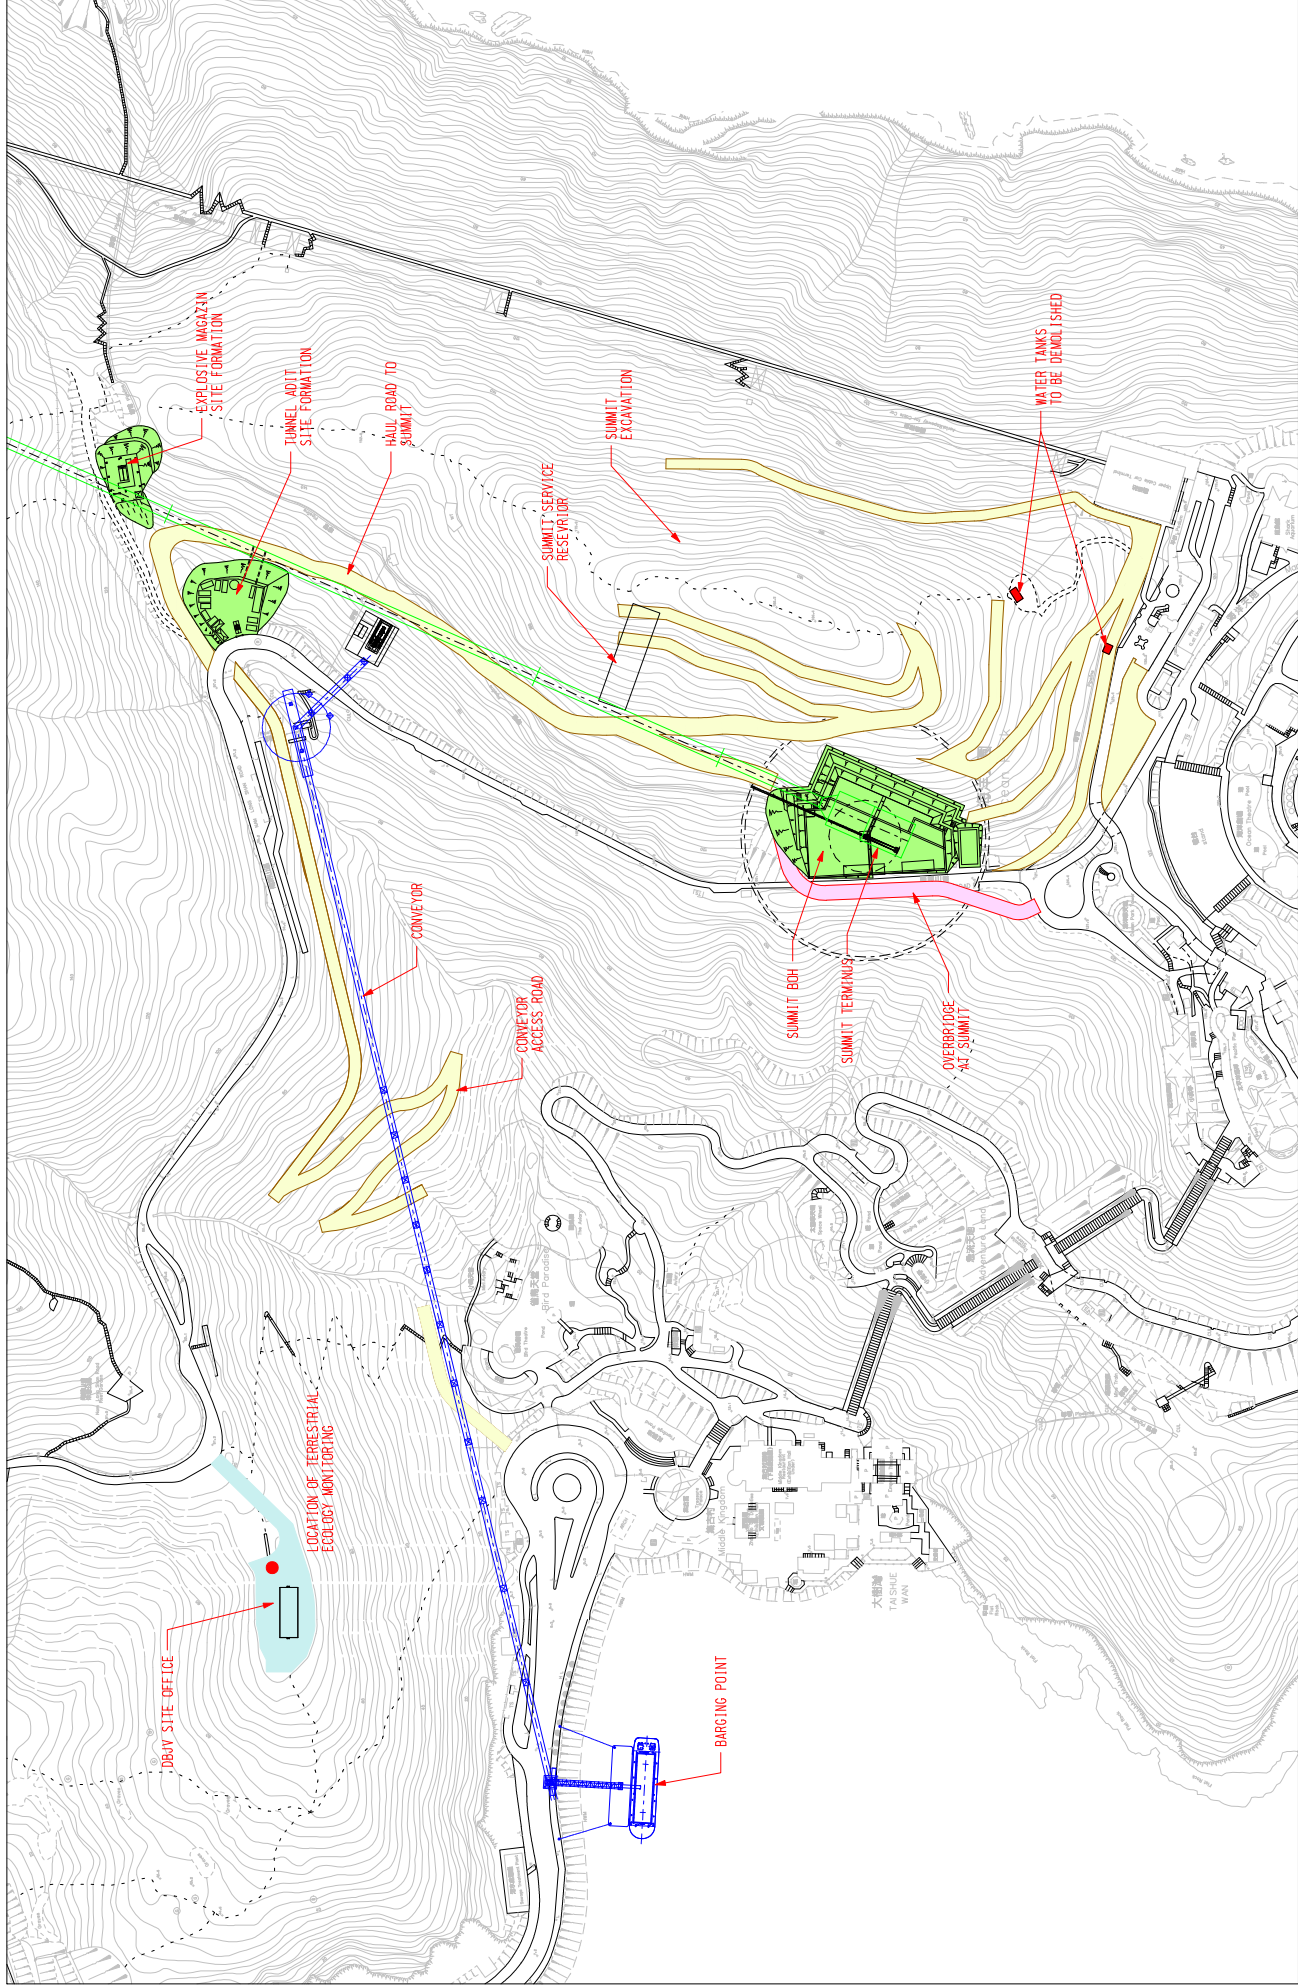

DESIGNED BY				BLD				MAIN CONTRACTOR			
DRAWN BY				BLD				BLD			
CHECKED BY				CEN				CEN			
IN CHARGE				DNG				DNG			
DATE				03/04/2007				03/04/2007			
REVISION				DESCRIPTION				DESCRIPTION			
A				03/04/2007				CEN			
REV.				DATE				BY			

		CLIENT :				PROJECT TITLE :	
				OCEAN PARK REDEVELOPMENT			
				Contract No. C105			
				Site Formation, Funicular Tunnel			
				and Miscellaneous Works			

DRAWING TITLE :		FIGURE 1.3	
		LAYOUT OF WORK SITE (SUMMIT)	
		AND LOCATION OF	
		TERRESTRIAL ECOLOGY MONITORING	

CAD FILENAME :		01ENW001A.LGN	
DATE :		02/02/2007	
SCALE :		1 : 2500 @ A3	
DRAWING NUMBER :		REV.	
		DBJW/C105/01/ENW/0014 A	




LEGEND:

■ PROPOSED NOISE MONITORING STATION

▲ PROPOSED AIR QUALITY MONITORING STATION

梁水灣
DEEP WATER BAY
(SHAM SHUI WAN)

DESIGNED BY SIO				DRAWING TITLE : PROJECT TITLE : OCEAN PARK REDEVELOPMENT Contract No. C05 Site Formation, Funicular Tunnel and Miscellaneous Works				DRAWING TITLE : FIGURE 1.4 AIR QUALITY AND NOISE MONITORING STATIONS LOCATION PLAN				CADD FILENAME : DATE : SCALE : DRAWING NUMBER : REV.			
CHECKED BY B.C.				CLIENT : 香港海洋公園 OCEAN PARK HONG KONG				OCEAN PARK HONG KONG				OCEAN PARK HONG KONG			
IN CHARGE Y.S.				DRAWING NUMBER : DBJ/V/C/05/QJ/ENV/0015				DRAWING NUMBER : DBJ/V/C/05/QJ/ENV/0015				DRAWING NUMBER : DBJ/V/C/05/QJ/ENV/0015			
DATE				DATE				DATE				DATE			
DATE				DATE				DATE				DATE			

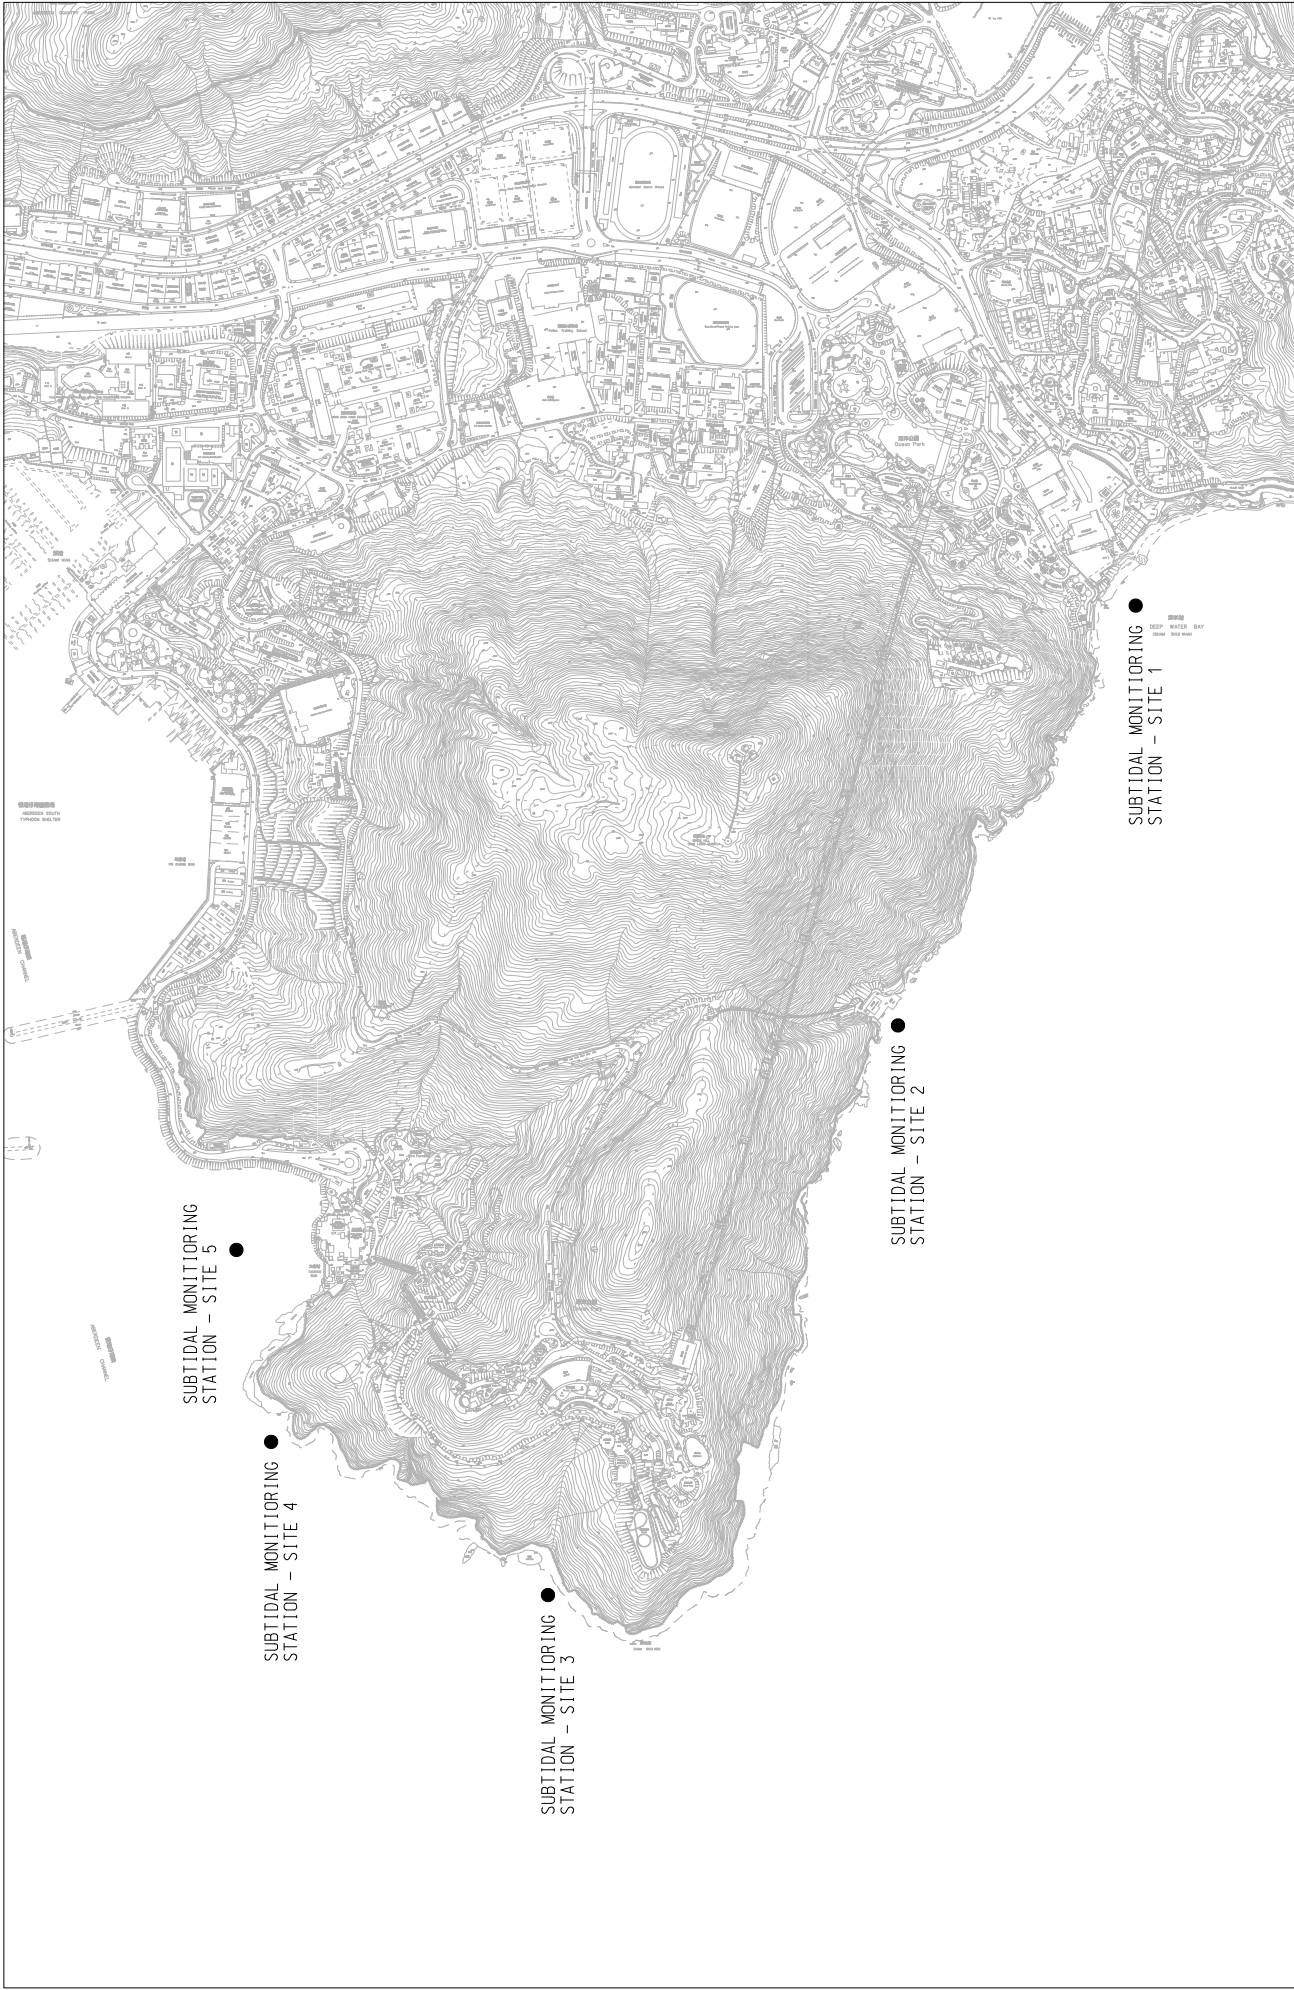

MAIN CONTRACTOR :										CLIENT :										PROJECT TITLE :										DRAWING TITLE :										CASE FILENAME :									
DESIGNED BY										STG										OCEAN PARK REDEVELOPMENT										FIGURE 5.1										OCEANWOOD/6A.DWG									
DRAWN BY										BLO										Contract No. C05										LOCATIONS OF										DATE : 02APR2007									
CHECKED BY										STG										Site Formation, Funicular Tunnel										SUBTIDAL MONITORING STATION										SCALE : 1 : 7500 @ A3									
IN CHARGE										YTS										OCEAN PARK HONG KONG										DRAWING NUMBER :										REV. :									
DATE										02APR2007										香港海洋公園										DBJ/V/C/05/01/ENV/0016										A									
DESCRIPTION										A										Droogers-Bouygues v/ 廣東-布依格聯營										REV.										A									
DATE										02APR2007										OCEAN PARK HONG KONG										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A										香港海洋公園										REV.										A									
DATE										02APR2007										香港海洋公園										REV.										A									
DESCRIPTION										A																																							

APPENDIX A - ACTION AND LIMIT LEVELS

Table A.1 Action and Limit Levels for 1-hour average TSP and 24-hour average TSP Monitoring

Monitoring Location	24-hr TSP ($\mu\text{g}/\text{m}^3$)		1-hr TSP ($\mu\text{g}/\text{m}^3$)	
	Action Level	Limit Level	Action Level	Limit Level
AM1	183	260	440	500
AM2	181	260	500	500
AM3	194	260	500	500

Table A.2 Action and Limit Levels of Daytime, Evening & Night-time Noise Monitoring

Time Period	Action	Limit
0700-1900 hrs on normal weekdays	When one documented complaint is received from any one of the sensitive receivers	75 dB(A) *
1900-2300 hrs on normal weekdays; and 0700-1900 hrs on holidays		60/65/70 dB(A) **
2300-0700 hrs of next day		45/50/55 dB(A) **

* reduce to 70dB(A) for school and 65dB(A) during school examination periods, if applicable

** to be selected based on the Area Sensitivity Rating of A/B/C, and the conditions of the CNP(s) must be followed

APPENDIX B – ENVIRONMENTAL MONITORING SCHEDULES

From 26 May 2007 to 25 June 2007

Sun	Mon	Tue	Wed	Thu	Fri	Sat
						26 1-hr TSP 24-hr TSP
27	28 1-hr TSP NM (D)	29	30 1-hr TSP NM (E)	31	1 1-hr TSP 24-hr TSP	2
3	4 1-hr TSP NM (D)	5	6 1-hr TSP NM (E)	7 1-hr TSP 24-hr TSP	8 1-hr TSP	9 SM
10 SM	11 1-hr TSP NM (D)	12	13 1-hr TSP 24-hr TSP NM (E)	14	15 1-hr TSP	16 SM
17	18 1-hr TSP 24-hr TSP NM (D)	19	20 1-hr TSP NM (E)	21	22 1-hr TSP	23 1-hr TSP 24-hr TSP
24	25 1-hr TSP NM (D)	26	27 1-hr TSP NM (E)	28	29 1-hr TSP 24-hr TSP	30

Notes: NM (D) denotes Daytime Noise Monitoring

NM (E) denotes Evening Noise Monitoring if construction work is in progress

SM denotes Subtidal Monitoring; Any update / change in the schedule due to weather or other safety factors will be reported in the monthly EM&A report.

APPENDIX C – AIR QUALITY MONITORING RESULTS

1-hr TSP Monitoring Results at Station AM1

Monitoring Period			Filter Weight (g)	Flow Rate (m ³ /min)		Elapse Time (hour)		Sampling Time (hours)	Concentration (µg/m ³)	Weather Condition	Particular weight (g)	Average flow (m ³ /min)	Total volume (m ³)
From	Time	Date	Time	Initial	Final	Initial	Final						
27-Apr-07	x	27-Apr-07	x	x	x	x	x	x	x	x	x	x	x
30-Apr-07	13:20	30-Apr-07	14:20	2.8232	2.8297	1.0	1.0	1	110	Fine	0.0065	1.0	59
02-May-07	09:00	02-May-07	10:01	2.8126	2.8233	0.9	0.9	1	193	Fine	0.0107	0.9	56
03-May-07	09:00	03-May-07	10:00	2.8409	2.8483	1.0	1.0	1	119	Fine	0.0074	1.0	62
04-May-07	15:30	04-May-07	16:30	2.8935	2.8998	1.0	1.0	1	109	Fine	0.0063	1.0	58
07-May-07	09:00	07-May-07	10:00	2.8760	2.8855	0.9	0.9	1	173	Fine	0.0095	0.9	55
09-May-07	09:00	09-May-07	10:00	2.8812	2.8895	1.0	1.0	1	140	Sunny	0.0083	1.0	59
11-May-07	10:00	11-May-07	11:00	2.9178	2.9278	0.9	0.9	1	182	Fine	0.0100	0.9	55
14-May-07	09:00	14-May-07	10:00	2.9065	2.9182	0.9	0.9	1	207	Cloudy	0.0117	0.9	56
15-May-07	09:00	15-May-07	10:00	2.8896	2.8976	1.0	1.0	1	135	Cloudy	0.0080	1.0	59
16-May-07	13:20	16-May-07	14:20	2.7983	2.8073	0.9	0.9	1	164	Fine	0.0090	0.9	55
18-May-07	09:00	18-May-07	10:00	2.8068	2.8146	1.0	1.0	1	125	Cloudy	0.0078	1.0	62
21-May-07	09:00	21-May-07	10:00	2.8124	2.8171	1.0	1.0	1	77	Cloudy	0.0047	1.0	61
23-May-07	10:20	23-May-07	11:20	2.7995	2.8071	0.8	0.8	1	159	Cloudy	0.0076	0.8	47
25-May-07	09:00	25-May-07	10:00	2.8127	2.8205	1.0	1.0	1	131	Cloudy	0.0078	1.0	59

1-hr TSP Monitoring Results at Station AM2

Monitoring Period			Filter Weight (g)	Flow Rate (m ³ /min)		Elapse Time (hour)		Sampling Time (hours)	Concentration (µg/m ³)	Weather Condition	Particular weight (g)	Average flow (m ³ /min)	Total volume (m ³)
From	Time	Date	Time	Initial	Final	Initial	Final						
27-Apr-07	09:00	27-Apr-07	10:00	2.8236	2.8321	1.0	1.0	1	135	Fine	0.0085	1.0	62
30-Apr-07	13:10	30-Apr-07	14:10	2.8338	2.8398	0.9	0.9	1	110	Fine	0.0060	0.9	55

1-hr TSP Monitoring Results at Station AM2

Monitoring Period				Filter Weight (g)		Flow Rate (m ³ /min)		Elapse Time (hour)		Sampling Time (hours)	Concentration (µg/m ³)	Weather Condition	Particular weight (g)	Average flow (m ³ /min)	Total volume (m ³)
From	Time	Date	To												
Date	Time	Date	Time	Initial	Final	Initial	Final	Initial	Final						
02-May-07	09:00	02-May-07	10:00	2.8276	2.8353	1.0	1.0	9272.99	9273.99	1	123	Fine	0.0077	1.0	62
03-May-07	09:00	03-May-07	10:00	2.8170	2.8241	1.0	1.0	9273.99	9274.99	1	114	Fine	0.0071	1.0	62
04-May-07	15:10	04-May-07	16:10	2.9047	2.9093	1.0	1.0	9298.99	9299.99	1	79	Fine	0.0046	1.0	59
07-May-07	09:00	07-May-07	10:00	2.9069	2.9168	1.0	1.0	9299.99	9300.99	1	159	Fine	0.0099	1.0	62
09-May-07	09:00	09-May-07	10:00	2.9006	2.9075	1.1	1.1	9300.99	9301.99	1	107	Sunny	0.0069	1.1	64
11-May-07	10:00	11-May-07	11:00	2.8795	2.8891	1.0	1.0	9326.00	9327.00	1	154	Fine	0.0096	1.0	62
14-May-07	09:00	14-May-07	10:00	2.9307	2.9429	1.0	1.0	9327.00	9328.00	1	202	Cloudy	0.0122	1.0	60
15-May-07	09:00	15-May-07	10:00	2.9109	2.9209	0.9	0.9	9328.00	9329.00	1	177	Cloudy	0.0100	0.9	57
16-May-07	13:05	16-May-07	14:05	2.8149	2.8249	1.1	1.1	9353.00	9354.00	1	156	Fine	0.0100	1.1	64
18-May-07	09:00	18-May-07	10:00	2.8013	2.8093	1.1	1.1	9354.00	9355.00	1	124	Cloudy	0.0080	1.1	64
21-May-07	09:00	21-May-07	10:00	2.8024	2.8114	1.1	1.1	9355.00	9356.00	1	136	Cloudy	0.0090	1.1	66
23-May-07	10:10	23-May-07	11:10	2.7998	2.8077	1.1	1.1	9380.00	9381.00	1	123	Cloudy	0.0079	1.1	64
25-May-07	09:00	25-May-07	10:00	2.7999	2.8066	1.1	1.1	9381.00	9382.00	1	104	Cloudy	0.0067	1.1	64

1-hr TSP Monitoring Results at Station AM3

Monitoring Period				Filter Weight (g)		Flow Rate (m ³ /min)		Elapse Time (hour)		Sampling Time (hours)	Concentration (µg/m ³)	Weather Condition	Particular weight (g)	Average flow (m ³ /min)	Total volume (m ³)
From	Time	Date	To												
Date	Time	Date	Time	Initial	Final	Initial	Final	Initial	Final						
27-Apr-07	09:00	27-Apr-07	10:00	2.8119	2.8204	1.1	1.1	11699.63	11700.63	1	127	Fine	0.0085	1.1	67
30-Apr-07	13:00	30-Apr-07	14:00	2.8296	2.8385	1.1	1.1	11724.63	11725.63	1	130	Fine	0.0089	1.1	69
02-May-07	09:00	02-May-07	10:00	2.8170	2.8305	1.2	1.2	11725.63	11726.63	1	190	Fine	0.0135	1.2	71
03-May-07	09:00	03-May-07	10:00	2.8423	2.8512	1.2	1.2	11726.63	11727.63	1	126	Fine	0.0089	1.2	71
04-May-07	15:00	04-May-07	16:00	2.8954	2.9029	1.2	1.2	11751.63	11752.63	1	103	Fine	0.0075	1.2	73

1-hr TSP Monitoring Results at Station AM3

Monitoring Period			Filter Weight (g)		Flow Rate (m ³ /min)		Elapse Time (hour)		Sampling Time (hours)	Concentration (µg/m ³)	Weather Condition	Particular weight (g)	Average flow (m ³ /min)	Total volume (m ³)
From	Time	Date	Time	To	Initial	Final	Initial	Final						
07-May-07	09:00	07-May-07	10:00		2.8907	2.9046	1.2	1.2	11752.63	11753.63	Fine	0.0139	1.2	73
09-May-07	09:00	09-May-07	10:00		2.9125	2.9264	1.2	1.2	11753.63	11754.63	Sunny	0.0139	1.2	73
11-May-07	10:00	11-May-07	11:00		2.9133	2.9259	1.2	1.2	11778.63	11779.63	Fine	0.0126	1.2	73
14-May-07	09:00	14-May-07	10:00		2.8751	2.8899	1.2	1.2	11779.63	11780.63	Cloudy	0.0148	1.2	69
15-May-07	09:00	15-May-07	10:00		2.8865	2.9007	1.1	1.1	11780.63	11781.63	Cloudy	0.0142	1.1	67
16-May-07	12:55	16-May-07	13:55		2.7983	2.8175	1.2	1.2	11805.63	11806.63	Fine	0.0192	1.2	69
18-May-07	09:00	18-May-07	10:00		2.8083	2.8199	1.1	1.1	11806.63	11807.63	Cloudy	0.0116	1.1	67
21-May-07	x	21-May-07	x		x	x	x	x	x	x	x	x	x	x
23-May-07	x	23-May-07	x		x	x	x	x	x	x	x	x	x	x
25-May-07	09:00	25-May-07	10:00		2.7884	2.7987	1.2	1.2	11856.16	11857.16	Cloudy	0.0103	1.2	72

Remarks:

Bold value indicated an Action Level exceedance

Bold & Italic value indicated an Limit Level exceedance

X – denotes no measurement due to power supply failure

APPENDIX C – AIR QUALITY MONITORING RESULTS (CONT'D)

24-hr TSP Monitoring Results at Station AM1

Monitoring Period		Filter Weight (g)		Flow Rate (m ³ /min)		Elapse Time (hour)		Sampling Time (hours)	Concentration (µg/m ³)	Weather Condition	Particular weight (g)	Average flow (m ³ /min)	Total volume (m ³)
From	To	Initial	Final	Initial	Final	Initial	Final						
27-Apr-07	x	28-Apr-07	x	x	x	x	x	x	x	x	x	x	x
03-May-07	11:52	04-May-07	11:52	2.8531	2.9342	0.9	0.9	24	63	Fine	0.0811	0.9	1285
09-May-07	11:35	10-May-07	11:35	2.9089	2.9984	0.9	0.9	24	70	Sunny	0.0895	0.9	1285
15-May-07	13:18	16-May-07	13:18	2.7841	2.8560	0.9	0.9	24	54	Cloudy	0.0719	0.9	1321
21-May-07	11:37	22-May-07	11:37	2.8123	2.8868	1.0	1.0	24	51	Cloudy	0.0745	1.0	1460

24-hr TSP Monitoring Results at Station AM2

Monitoring Period		Filter Weight (g)		Flow Rate (m ³ /min)		Elapse Time (hour)		Sampling Time (hours)	Concentration (µg/m ³)	Weather Condition	Particular weight (g)	Average flow (m ³ /min)	Total volume (m ³)
From	To	Initial	Final	Initial	Final	Initial	Final						
27-Apr-07	10:30	28-Apr-07	10:30	2.8406	2.9502	1.0	1.0	24	73	Fine	0.1096	1.0	1497
03-May-07	11:36	04-May-07	11:36	2.8228	2.9088	1.0	1.0	24	57	Fine	0.0860	1.0	1497
09-May-07	11:20	10-May-07	11:21	2.9104	3.0096	1.0	1.0	24	66	Sunny	0.0992	1.0	1497
15-May-07	13:00	16-May-07	13:00	2.8212	2.9059	1.1	1.1	24	55	Cloudy	0.0847	1.1	1542
21-May-07	11:22	22-May-07	11:22	2.7978	2.8832	1.1	1.1	24	54	Cloudy	0.0854	1.1	1588

24-hr TSP Monitoring Results at Station AM3

Monitoring Period		Filter Weight (g)		Flow Rate (m ³ /min)		Elapse Time (hour)		Sampling Time (hours)	Concentration (µg/m ³)	Weather Condition	Particular weight (g)	Average flow (m ³ /min)	Total volume (m ³)
From	To	Initial	Final	Initial	Final	Initial	Final						
27-Apr-07	11:00	28-Apr-07	11:00	2.8267	2.9807	1.2	1.2	24	91	Fine	0.1540	1.2	1693
03-May-07	11:23	04-May-07	11:23	2.8318	2.9686	1.2	1.2	24	78	Fine	0.1368	1.2	1743

24-hr TSP Monitoring Results at Station AM3

Monitoring Period			Filter Weight (g)		Flow Rate (m ³ /min)		Elapse Time (hour)		Sampling Time (hours)	Concentration (µg/m ³)	Weather Condition	Particular weight (g)	Average flow (m ³ /min)	Total volume (m ³)
From	To		Initial	Final	Initial	Final	Initial	Final						
Date	Time	Date	Time											
09-May-07	11:15	10-May-07	11:15	2.9001	3.039	1.2	1.2	11754.63	11778.63	24	Sunny	0.1389	1.2	1743
15-May-07	12:45	16-May-07	12:45	2.8078	2.9340	1.2	1.2	11781.63	11805.63	24	Cloudy	0.1262	1.2	1743
21-May-07	x	22-May-07	x	x	x	x	x	x	x	x	x	x	x	x

Remarks: Bold value indicated an Action Level exceedance

Bold & Italic value indicated an Limit Level exceedance

X – denotes no measurement due to power supply failure

Figure C.1 1-hr TSP monitoring results of Monitoring Station AM1

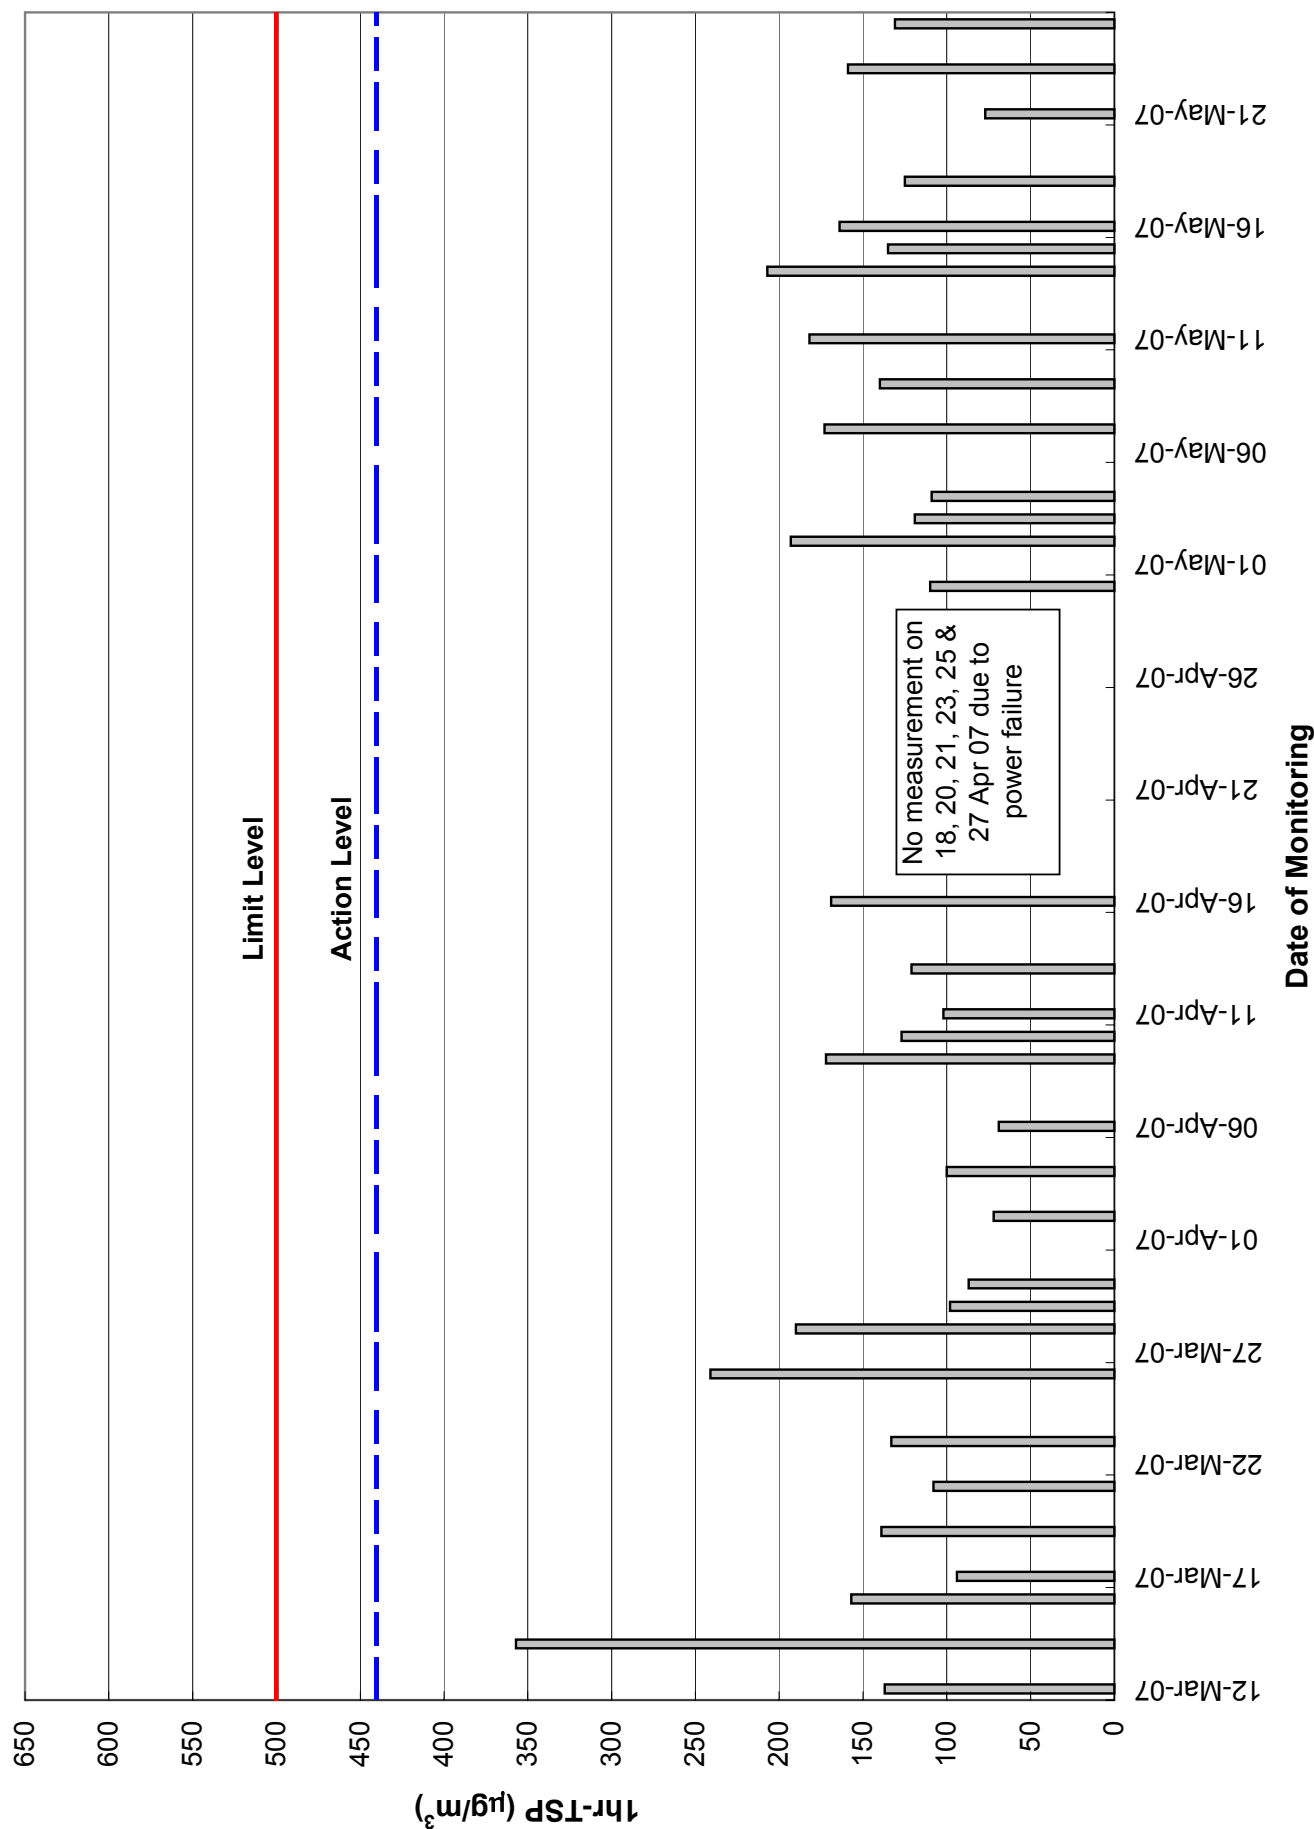


Figure C.2 1-hr TSP monitoring results of Monitoring Station AM2

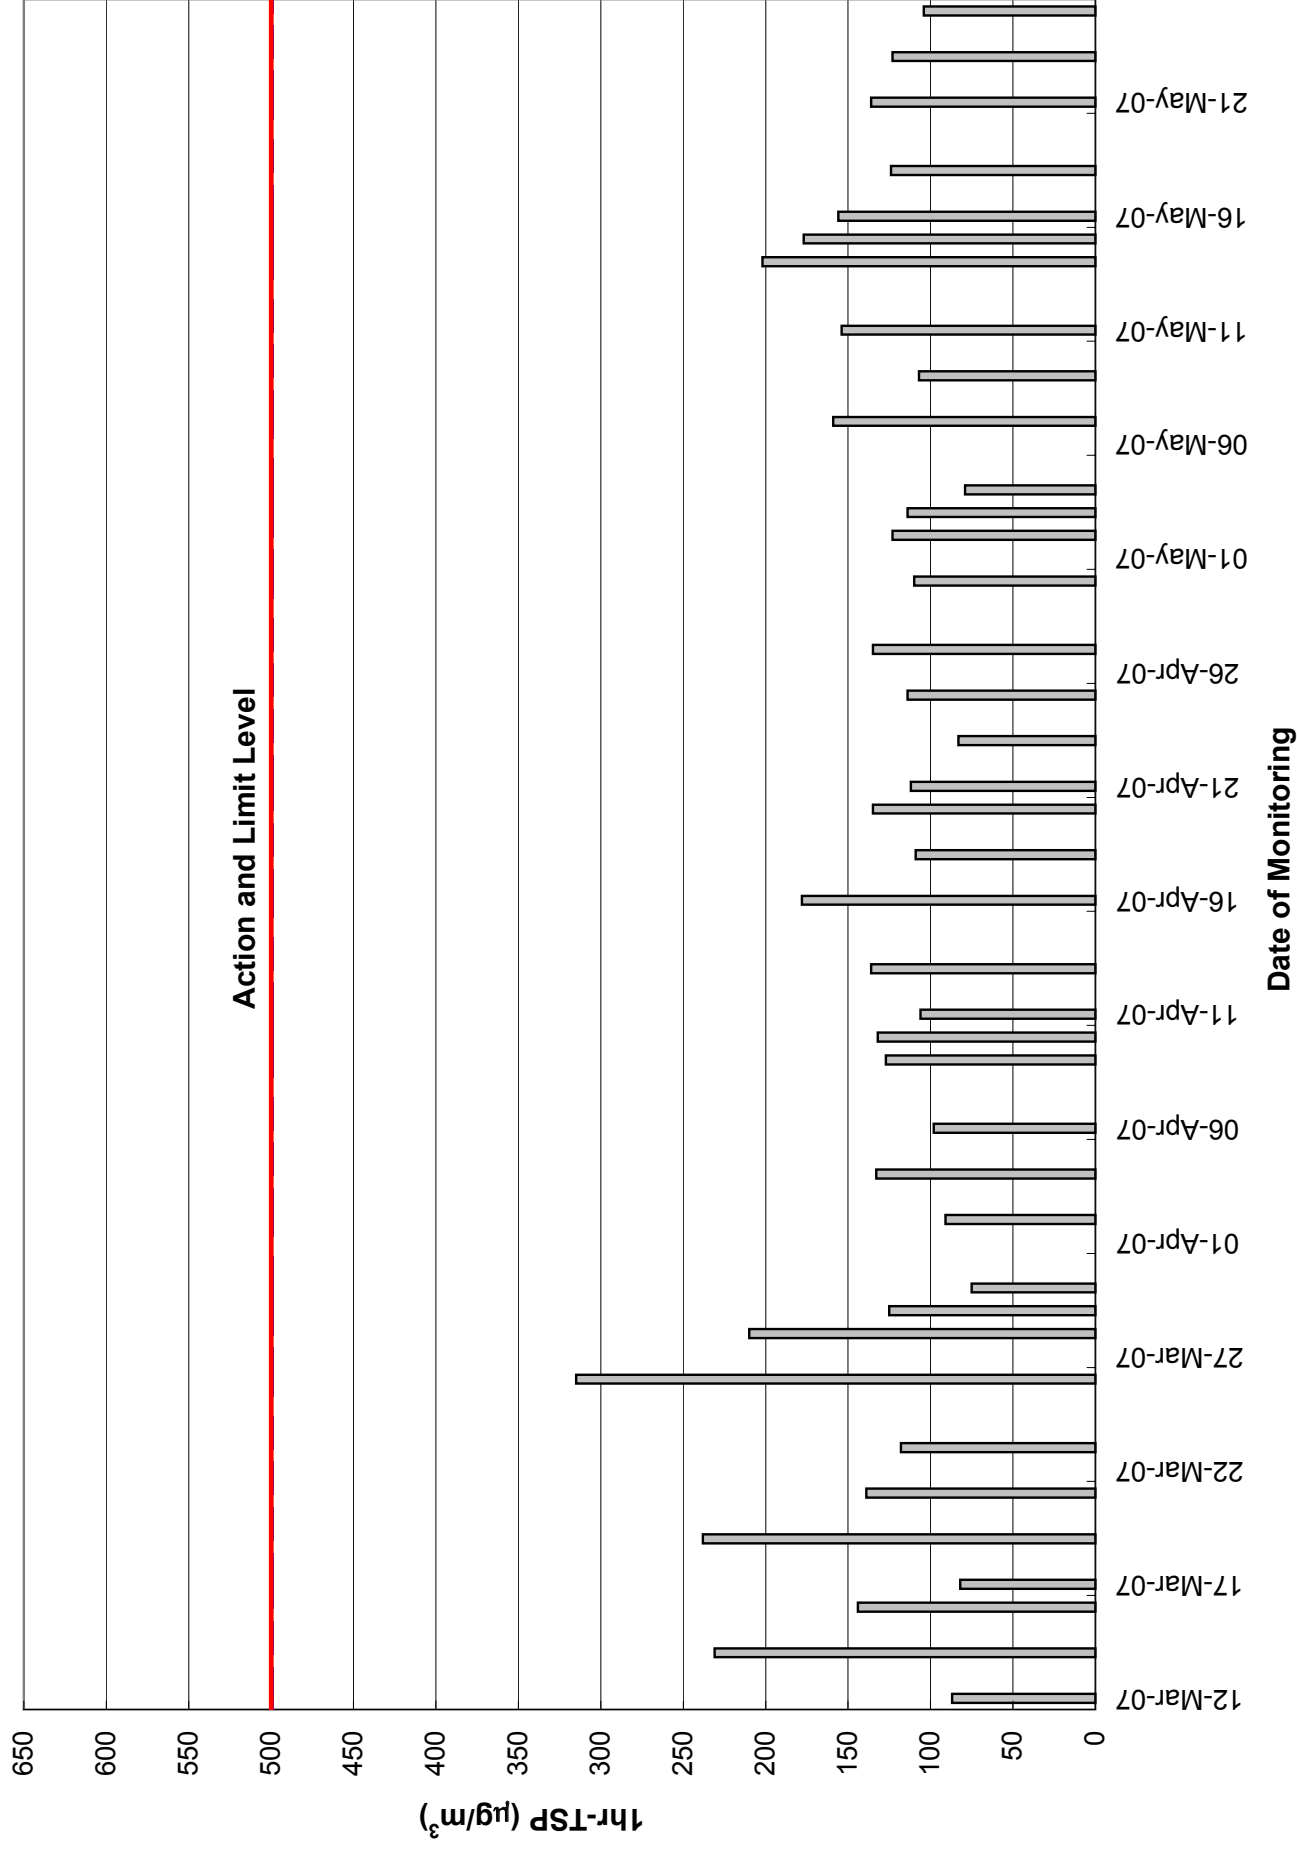


Figure C.3 1-hr TSP monitoring results of Monitoring Station AM3


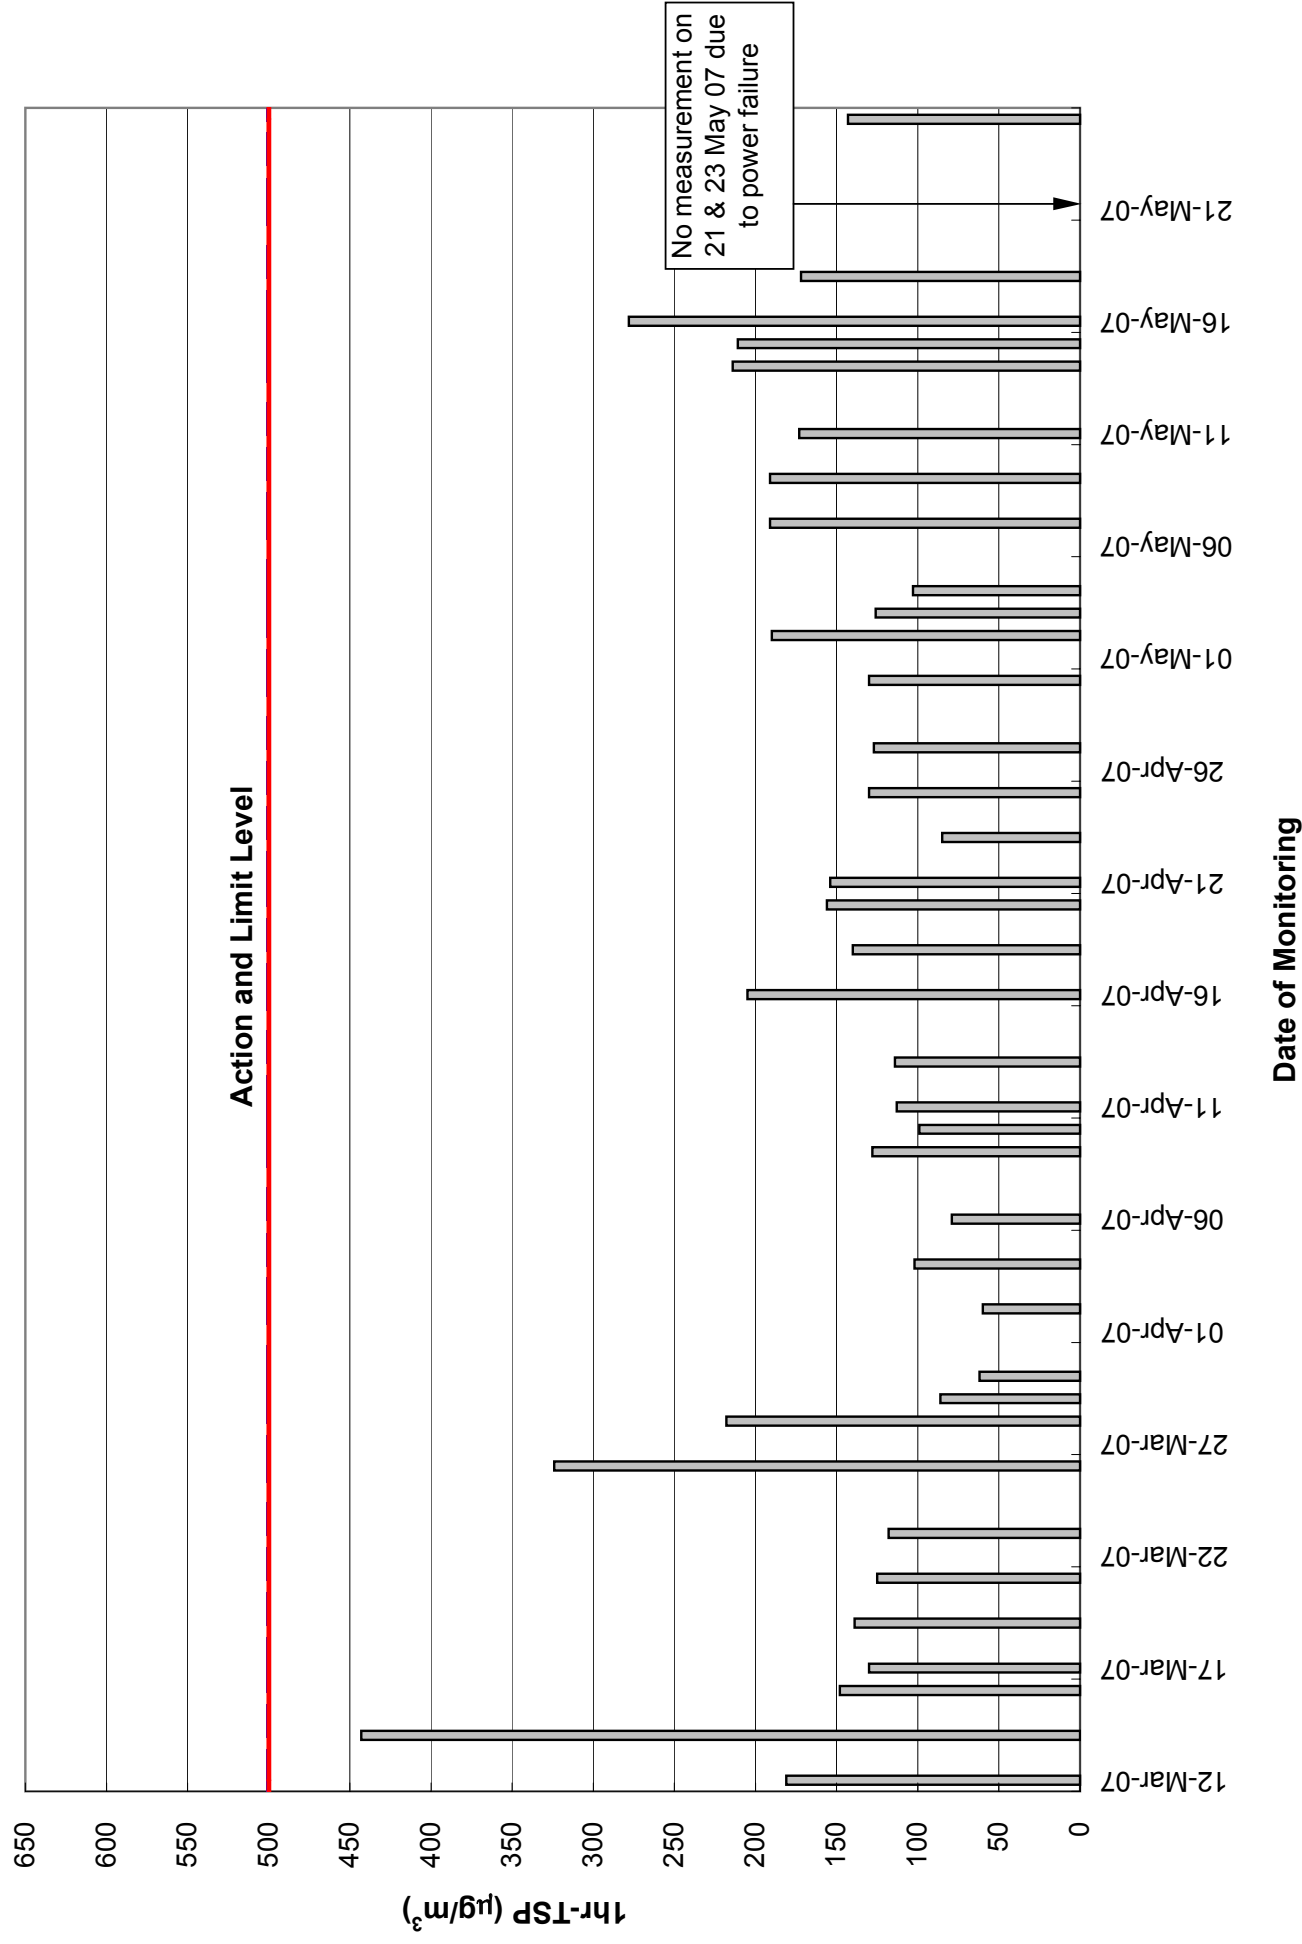


Figure C.4 24-hr TSP monitoring results of Monitoring Station AM1, AM2 & AM3

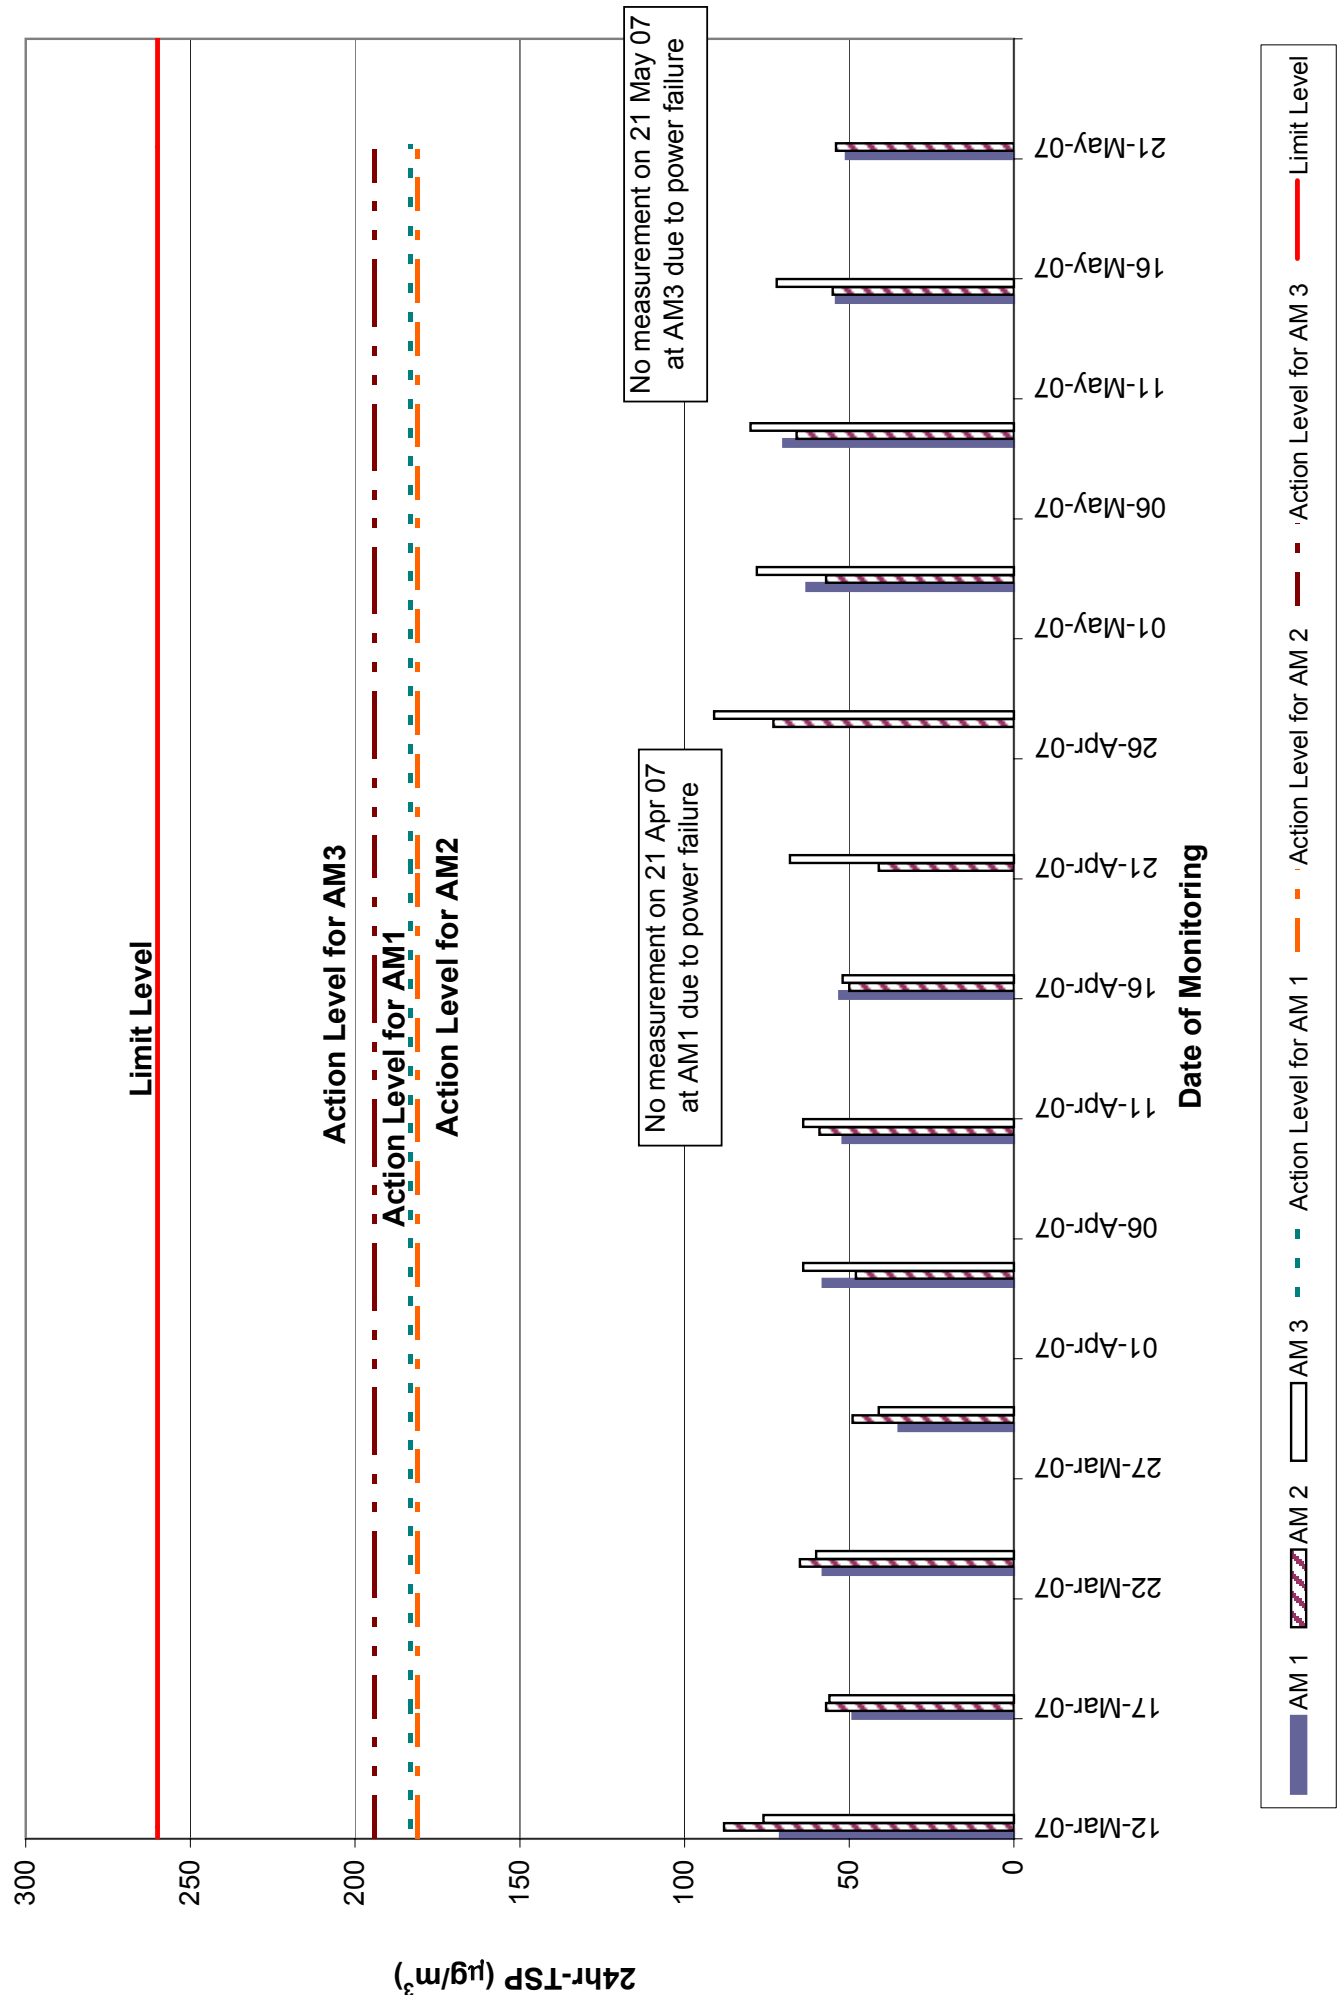

APPENDIX D – NOISE MONITORING RESULTS

Daytime Noise Monitoring Results at Station CN1

Date	Weather Condition	Measured Noise Level for 30 mins., dB(A)				Baseline Noise Level, dB(A)	Limit Level, dB(A)	Exceedance (Y/N)
		Time	Leq	L10	L90			
30-Apr-07	Cloudy	09:30	60.9	64.8	56.5	63.2	70	N
07-May-07	Fine	09:00	63.3	68.6	60.0	63.2	70	N
14-May-07	Sunny	09:30	62.6	66.7	58.9	63.2	70	N
21-May-07	Cloudy	10:00	62.3	67.5	58.7	63.2	70	N

Daytime Noise Monitoring Results at Station CN2

Date	Weather Condition	Measured Noise Level for 30 mins., dB(A)				Baseline Noise Level, dB(A)	Limit Level, dB(A)	Exceedance (Y/N)
		Time	Leq	L10	L90			
30-Apr-07	Cloudy	14:00	63.2	65.8	61.4	64.0	75	N
07-May-07	Fine	10:00	66.1	71.4	62.7	64.0	75	N
14-May-07	Sunny	13:00	65.4	68.6	61.7	64.0	75	N
21-May-07	Cloudy	10:50	60.6	65.9	54.0	64.0	75	N

Daytime Noise Monitoring Results at Station CN3

Date	Weather Condition	Measured Noise Level for 30 mins., dB(A)				Baseline Noise Level, dB(A)	Limit Level, dB(A)	Exceedance (Y/N)
		Time	Leq	L10	L90			
30-Apr-07	Cloudy	14:50	55.7	58.8	53.6	59.3	75	N
07-May-07	Fine	10:50	55.5	63.2	51.8	59.3	75	N
14-May-07	Sunny	13:45	56.2	59.7	50.9	59.3	75	N
21-May-07	Cloudy	11:40	57.0	61.3	53.6	59.3	75	N

Daytime Noise Monitoring Results at Station CN4

Date	Weather Condition	Measured Noise Level for 30 mins., dB(A)				Baseline Noise Level, dB(A)	Limit Level, dB(A)	Exceedance (Y/N)
		Time	Leq	L10	L90			
30-Apr-07	Cloudy	15:30	57.3	59.9	54.5	59.9	75	N
07-May-07	Fine	13:00	54.8	62.1	49.9	59.9	75	N
14-May-07	Sunny	14:35	55.2	59.9	51.3	59.9	75	N
21-May-07	Cloudy	12:30	55.1	62.7	51.5	59.3	75	N

Remarks: Bold & Italic value indicated an Limit Level exceedance

Fig D.1 - Daytime Noise Monitoring Results of Monitoring Stations NM1, NM2, NM3 & NM4

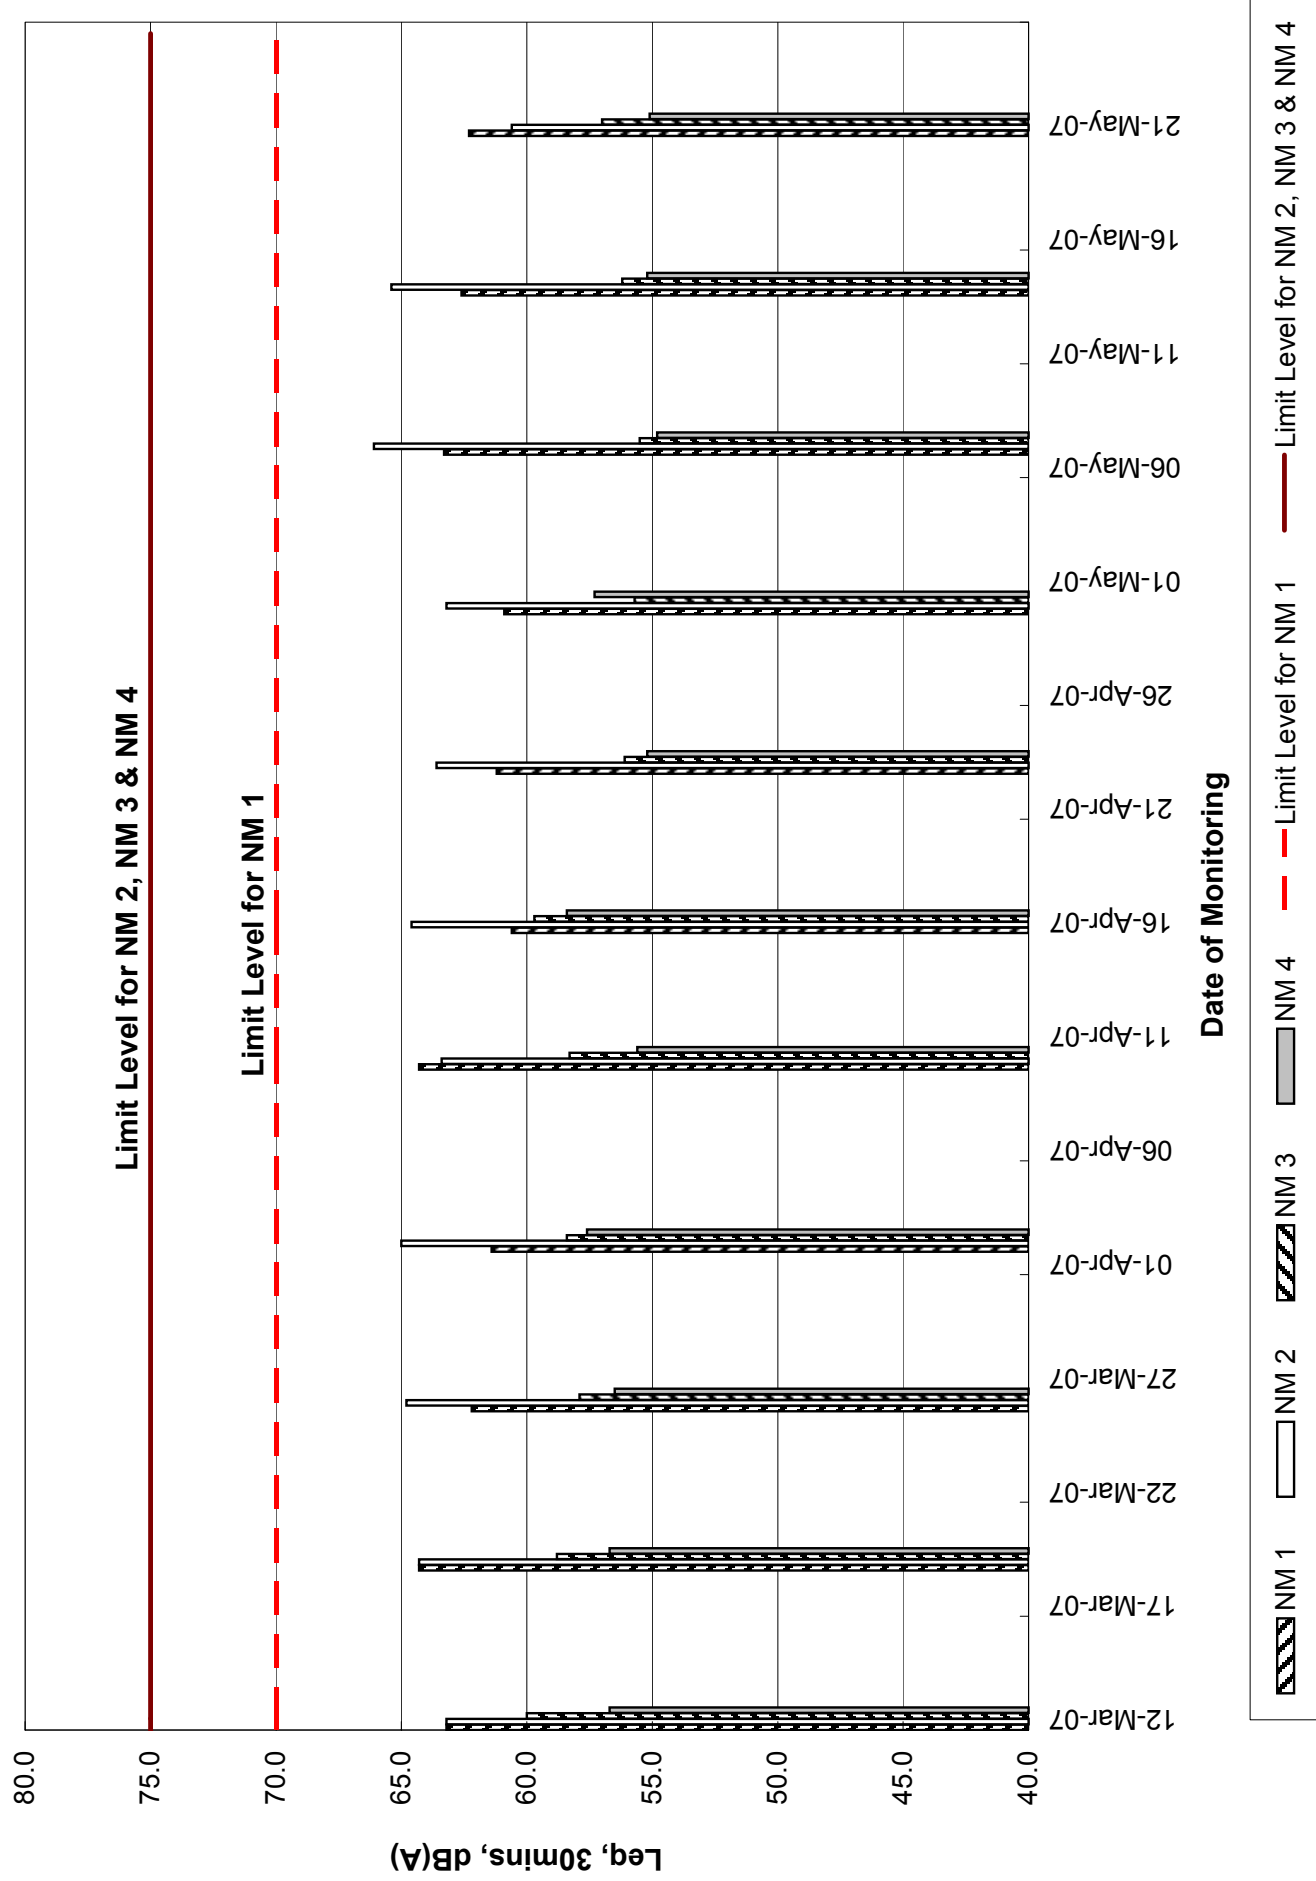


Fig D.2 - Evening Noise Monitoring Results of Monitoring Stations NM1, NM2, NM3 & NM4


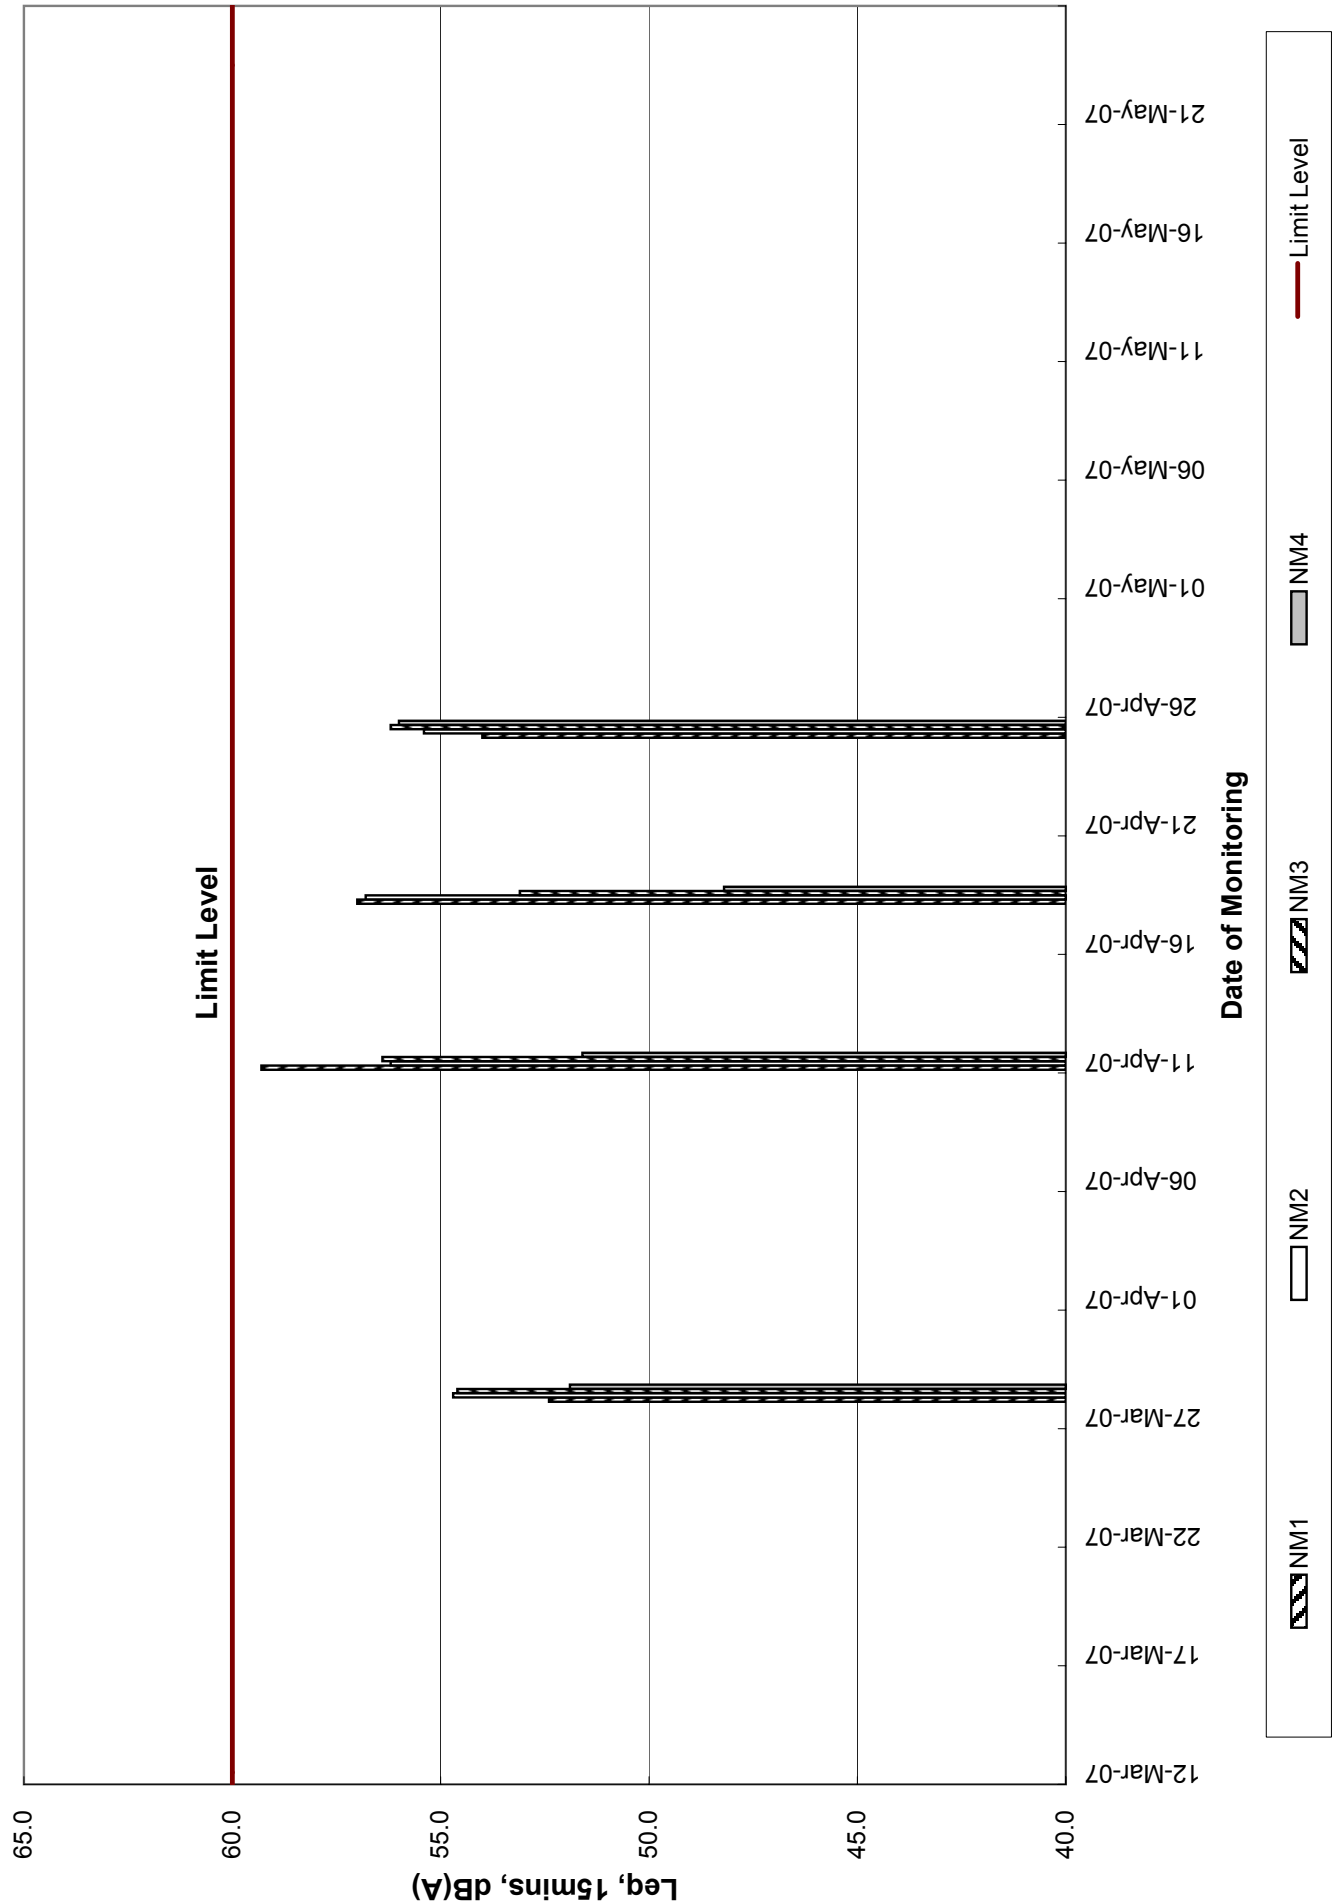


Figure D.3 - Holiday Noise Monitoring Results of Monitoring Stations NM1, NM2, NM3 & NM4

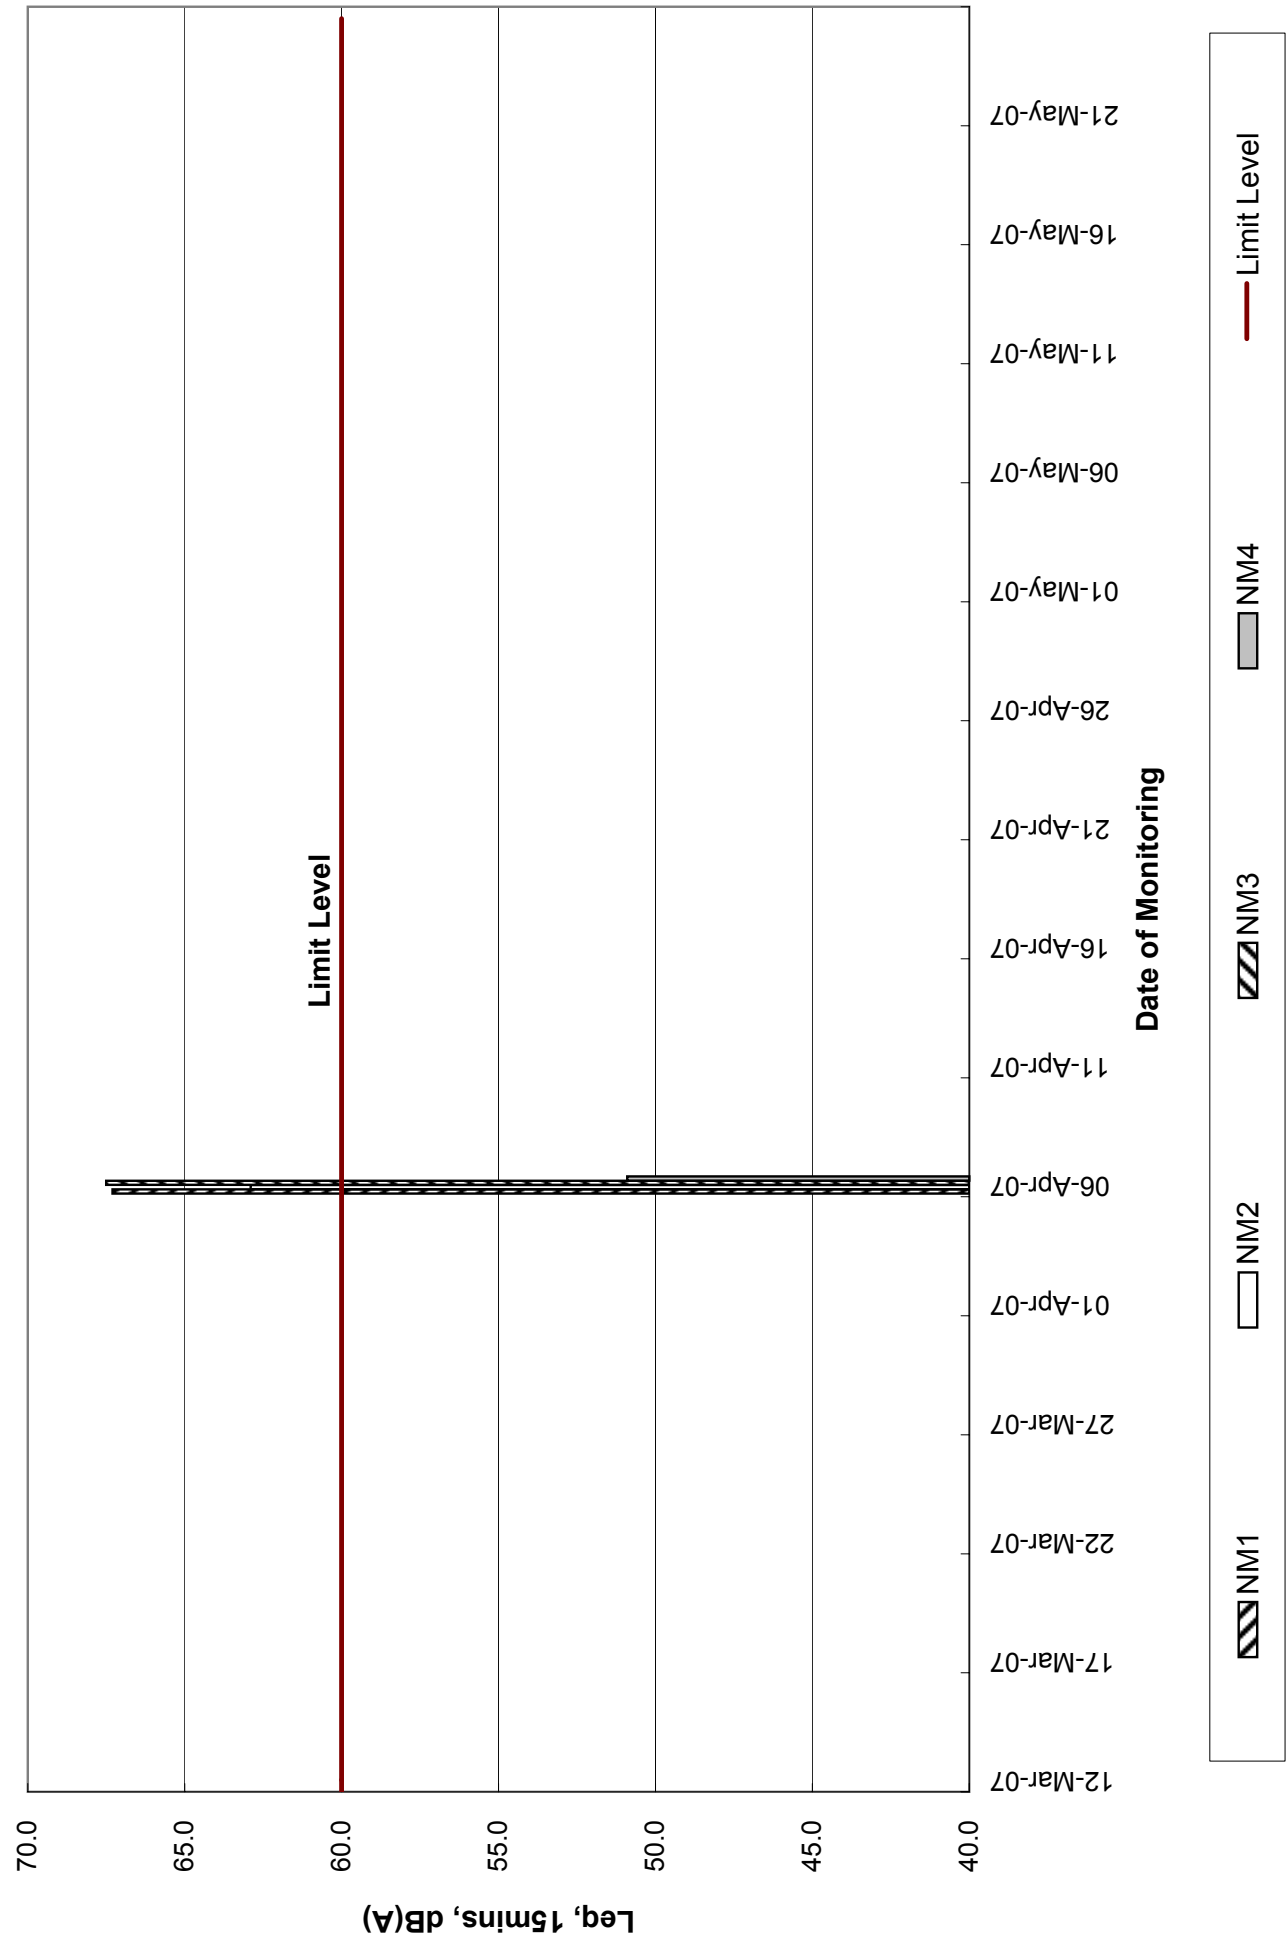


APPENDIX E – CALIBRATION DETAILS

Air Quality Monitoring Equipments

Monitoring Location	AM1	AM2	AM3
High Volume Sample Serial No.	1174	1177	9998
Sampler Identification	ET / EA / 003 / 08	ET / EA / 003 / 07	ET / EA / 003 / 12
Date of Calibration	02 May 2007	09 April 2007	02 May 2007
Calibration Due Date	01 July 2007	08 June 2007	01 July 2007
Result	Good	Good	Good

Noise Monitoring Equipments

Monitoring Location	CN1, CN2, CN3 & CN4
Sound Level Meter Brand Name and Model	Rion NL-31
Serial No.	01120826
Date of Calibration	27 December 2006
Calibration Due Date	26 December 2007
Result	Good



東業德勤測試顧問有限公司
ETS-TESTCONSULT LIMITED

8/F., Block B, Veristrong Industrial Centre, 34-36 Au Pui Wan Street, Fotan, Hong Kong
Tel : 2695 8318 E-mail : ett@ets-testconsult.com
Fax : 2695 3944 Web site : www.ets-testconsult.com

TEST REPORT


Calibration Report
of
High Volume Air Sampler

Manufacturer : Graseby GMW **Date of Calibration** : 02 May 2007
Serial No. : 1174 (ET / EA / 003 / 08) **Calibration Due Date** : 01 July 2007
Method : Based on Operations Manual for in series calibration method by TISCH
ENVIROMENTAL Model Te-5025A calibration kit

Results

Flow recorder reading (cfm)	62	54	46	35	25
Qstd (Actual flow rate, m ³ /min)	1.70	1.50	1.31	1.03	0.80
Pressure :	759.81 mm Hg		Temp. :	307 K	

Sampler 1174 Calibration Curve
Site: Ocean Park (AM-1)
Date of Calibration: 02 May 2007

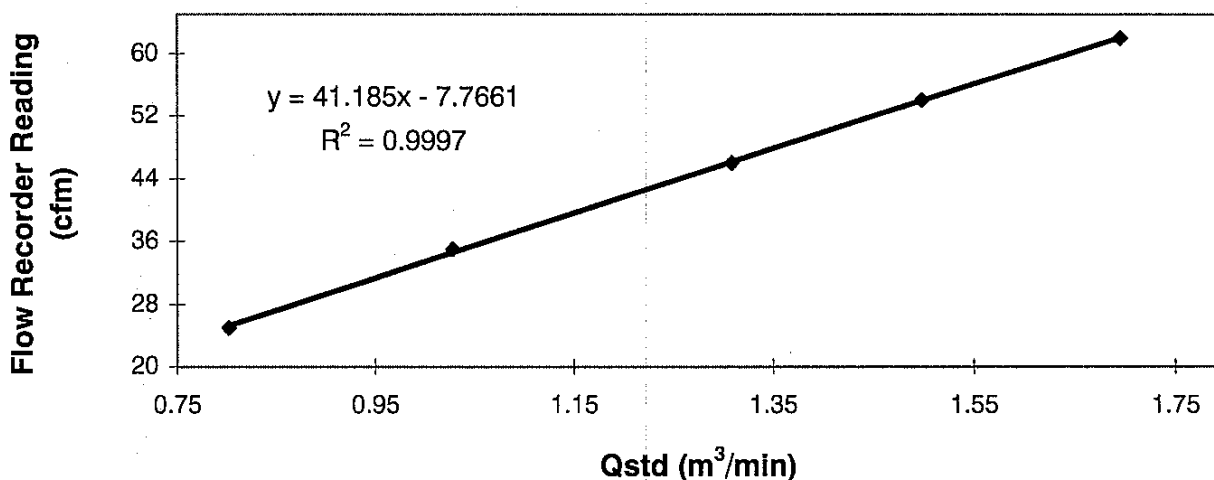

Acceptance Criteria : Correlation coefficient (r) of the calibration curve greater than 0.990 after a 5-point calibration

The high volume sampler complies * / ~~does not comply~~ * with the specified requirements and is deemed acceptable * / unacceptable * for use.

Calibrated by : Kiu
Kenneth CHIU
(Asst. Technician)

Approved by : H. T. CHOW
H. T. CHOW
(Asst. Environmental Officer)



東業德勤測試顧問有限公司
ETS-TESTCONSULT LIMITED

8/F, Block B, Veristrong Industrial Centre, 34-36 Au Pui Wan Street, Fotan, Hong Kong
Tel : 2695 8318 E-mail : etl@ets-testconsult.com
Fax : 2695 3944 Web site : www.ets-testconsult.com

TEST REPORT


**Calibration Report
of
High Volume Air Sampler**

Manufacturer : Graseby GMW Date of Calibration : 09 April 2007
Serial No. : 1177 (ET / EA / 003 / 07) Calibration Due Date : 08 June 2007
Method : Based on Operations Manual for the 5-point calibration using standard calibration kit manufactured by Tisch TE-5025 A

Results

Flow recorder reading (cfm)	47	42	37	28	20
Qstd (Actual flow rate, m ³ /min)	1.62	1.46	1.28	1.00	0.77
Pressure :	765.06 mm Hg		Temp. :	299 K	

**Sampler 1177 Calibration Curve
Site: Ocean Park (AM-2)
Date of Calibration: 09 April 2007**

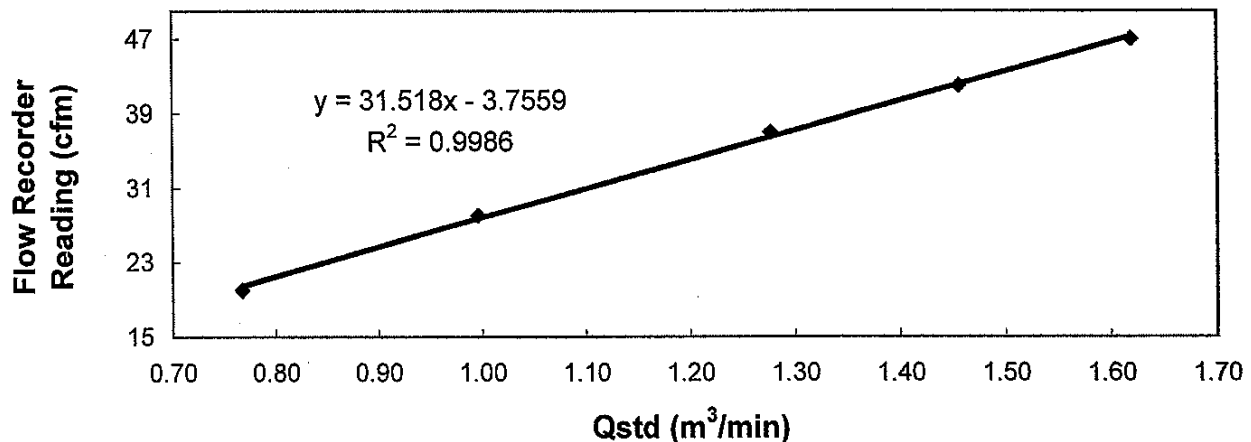


Acceptance Criteria : Correlation coefficient (r) of the calibration curve greater than 0.990 after a 5-point calibration

The high volume sampler complies * / does not comply * with the specified requirements and is deemed acceptable * / unacceptable * for use.

Calibrated by : Kin
Kenneth CHIU
(Asst. Technician)

Approved by : H. T. CHOW
H. T. CHOW
(Asst. Environmental Officer)



東業德勤測試顧問有限公司
ETS-TESTCONSULT LIMITED

8/F., Block B, Veristrong Industrial Centre, 34-36 Au Pui Wan Street, Fotan, Hong Kong
Tel : 2695 8318 E-mail : etl@ets-testconsult.com
Fax : 2695 3944 Web site : www.ets-testconsult.com

TEST REPORT

Calibration Report
of
High Volume Air Sampler

Manufacturer : Graseby GMW Date of Calibration : 02 May 2007
Serial No. : 9998 (ET / EA / 003 / 12) Calibration Due Date : 01 July 2007
Method : Based on Operations Manual for the 5-point calibration using standard calibration kit manufactured by Tisch TE-5025 A


Results

Flow recorder reading (cfm)	50	44	38	28	21
Qstd (Actual flow rate, m ³ /min)	1.66	1.47	1.28	1.01	0.80
Pressure : 759.81 mm Hg	Temp. : 308 K				

Sampler 9998 Calibration Curve

Site: Ocean Park (AM-3)

Date of Calibration: 02 May 2007

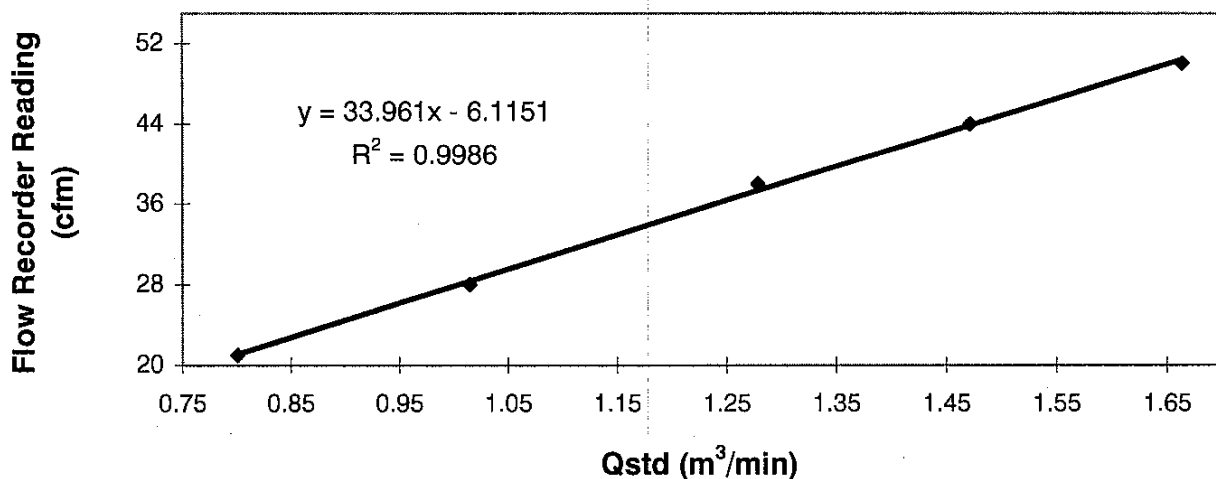

Acceptance Criteria : Correlation coefficient (r) of the calibration curve greater than 0.990 after a 5-point calibration

The high volume sampler complies * / ~~does not comply~~ * with the specified requirements and is deemed acceptable * / ~~unacceptable~~ * for use.

Calibrated by : Kenneth CHIU
(Assistant Technician)

Approved by : H. T. CHOW
(Asst. Environmental Officer)



Hong Kong Calibration Ltd.

香港校正有限公司

Calibration Certificate

Certificate No. 65870

Page 1 of 2 Pages

Customer : ETS-Testconsult Limited

Address : 8/F., Block B, Veristrong Industrial Centre, 34-36 Au Pui Wan St., Fotan, Hong Kong.

Order No. : Q62237

Date of receipt : 16-Dec-06

Item Tested

Description : Sound Level Calibrator

Manufacturer : Rion

Model : NC-73

Serial No. : 10727835

Test Conditions

Date of Test : 27-Dec-06

Supply Voltage : --

Ambient Temperature : (23 ± 3)°C

Relative Humidity : (50 ± 25) %

Test Specifications

Calibration check.

Calibration procedure : F21, Z02.

Test Results

All results were within the manufacturer's specification.

The results are shown in the attached page(s).

Test equipment used:

Equipment No.	Description	Cert. No.	Due Date	Traceable to
S014	Spectrum Analyzer	62914	7-Jul-07	NIM-PRC & SCL-HKSAR
S024	Sound Level Calibrator	62691	22-Apr-07	NIM-PRC & SCL-HKSAR
S041	Universal Counter	63839	22-Aug-07	SCL-HKSAR

The values given in this Calibration Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environmental changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Hong Kong Calibration Ltd. shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration are traceable to International System of Units (SI).

The test results apply to the above Unit-Under-Test only

Calibrated by :

P.F. Wong

Approved by :

Steve Kwan

Date: 27-Dec-06

This Certificate is issued by:

Hong Kong Calibration Ltd.

Unit 8B, 24/F., Well Fung Industrial Centre, No. 58-76, Ta Chuen Ping Street, Kwai Chung, NT, Hong Kong.

Tel: 2425 8801 Fax: 2425 8846

The copyright of this certificate is owned by Hong Kong Calibration Ltd.. It may not be reproduced except in full.



Calibration Certificate

Certificate No. 65870

Page 2 of 2 Pages

Results :

1. Level Accuracy (at 1 kHz)

UUT Nominal Value	Measured Value	Mfr's Spec.
94 dB	93.73 dB	± 1 dB

Uncertainty : ± 0.1 dB

2. Frequency Accuracy

UUT Nominal Value	Measured Value	Mfr's Spec.
1 kHz	0.998 kHz	± 2 %

Uncertainty : ± 0.1 %

3. Level Stability : 0.0 dB

Uncertainty : ± 0.01 dB

4. Total Harmonic Distortion : < 0.2 %

Mfr's Spec. : < 3 %

Uncertainty : ± 2.3 % of reading

Remark : 1. UUT : Unit-Under-Test

2. The uncertainty claimed is for a confidence probability of not less than 95%.

3. The above measured values are the mean of 3 measurement.

4. Atmospheric Pressure : 1 009 hPa

----- END -----



Hong Kong Calibration Ltd.

香港校正有限公司

Calibration Certificate

Certificate No. 65868

Page 1 of 3 Pages

Customer : ETS-Testconsult Limited

Address : 8/F., Block B, Veristrong Industrial Centre, 34-36 Au Pui Wan St., Fotan, Hong Kong.

Order No. : Q62237

Date of receipt : 16-Dec-06

Item Tested

Description : Precision Integrating Sound Level Meter

Manufacturer : Rion

Model : NL-31

Serial No. : 01120826

Test Conditions

Date of Test : 27-Dec-06

Supply Voltage : --

Ambient Temperature : $(23 \pm 3)^{\circ}\text{C}$

Relative Humidity : $(50 \pm 25) \%$

Test Specifications

Calibration check.

Calibration procedure : Z01.

Test Results

All results were within the IEC 651 Type 1 & IEC 804 Type 1 specification.

The results are shown in the attached page(s).

Test equipment used:

<u>Equipment No.</u>	<u>Description</u>	<u>Cert. No.</u>	<u>Due Date</u>	<u>Traceable to</u>
S017	Function Generator	C051022	21-Mar-07	SCL-HKSAR
S024	Sound Level Calibrator	62691	22-Apr-07	NIM-PRC & SCL-HKSAR

The values given in this Calibration Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environmental changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Hong Kong Calibration Ltd. shall not be liable for any loss or damage resulting from the use of the equipment.


The test equipment used for calibration are traceable to International System of Units (SI).

The test results apply to the above Unit-Under-Test only

Calibrated by :


P.F. Wong

Approved by :


Steve Kwan

Date: 27-Dec-06

This Certificate is issued by:

Hong Kong Calibration Ltd.

Unit 8B, 24/F., Well Fung Industrial Centre, No. 58-76, Ta Chuen Ping Street, Kwai Chung, NT, Hong Kong.

Tel: 2425 8801 Fax: 2425 8846

The copyright of this certificate is owned by Hong Kong Calibration Ltd.. It may not be reproduced except in full.



Calibration Certificate

Certificate No. 65868

Page 2 of 3 Pages

Results :

1. SPL Accuracy

UUT Setting			Applied Value (dB)	UUT Reading (dB)
Level Range (dB)	Weight	Response		
20 – 100	L _A	Fast	94.07	93.9
		Slow		93.9
	L _C L _p	Fast		93.9
		Fast		94.0
30 – 120	L _A	Fast	94.07	93.9
		Slow		93.9
	L _C L _p	Fast		93.9
		Fast		93.9
30 – 120	L _A	Fast	113.95	113.8
		Slow		113.8
	L _C L _p	Fast		113.8
		Fast		113.8

IEC 651 Type 1 Spec. : ± 0.7 dBUncertainty : ± 0.1 dB

2. Level Stability : 0.0 dB

IEC 651 Type 1 Spec. : ± 0.3 dBUncertainty : ± 0.01 dB

3. Linearity

3.1 Level Linearity

UUT Range	Applied Value (dB)	UUT Rdg (dB)	IEC 651 Type 1 Spec. (inside Primary)
140	114.0	114.0	± 0.7 dB
130	104.0	104.0	
120	94.0	93.9	
110	84.0	84.1	
100	74.0	74.1	
90	64.0	64.2	
80	54.0	54.1	

Uncertainty : ± 0.1 dB



Calibration Certificate

Certificate No. 65868

Page 3 of 3 Pages

3.2 Differential level linearity

UUT Range	Applied Value (dB)	UUT Rdg (dB)	IEC 651 Type 1 Spec.
120	84.0	83.9	± 0.4
	94.0	93.9	
	95.0	94.9	± 0.2
	104.0	103.9	± 0.3
	105.0	104.9	± 1.0

Uncertainty : ± 0.1 dB

4. Frequency Weighting

A weighting

Frequency	Attenuation (dB)	IEC 651 Type 1 Spec.
31.5 Hz	- 39.6	- 39.4 dB, ± 1.5 dB
63 Hz	- 26.2	- 26.2 dB, ± 1.5 dB
125 Hz	- 16.2	- 16.1 dB, ± 1 dB
250 Hz	- 8.7	- 8.6 dB, ± 1 dB
500 Hz	- 3.2	- 3.2 dB, ± 1 dB
1 kHz	0.0 (Ref.)	0 dB, ± 1 dB
2 kHz	+ 1.3	+ 1.2 dB, ± 1 dB
4 kHz	+ 1.1	+ 1.0 dB, ± 1 dB
8 kHz	- 1.1	- 1.1 dB, + 1.5 dB ~ - 3 dB
16 kHz	- 6.7	- 6.6 dB, + 3 dB ~ ∞

Uncertainty : ± 0.1 dB

5. Time Averaging

Applied Burst duty Factor	Applied Leq Value (dB)	UUT Reading (dB)	IEC 804 Type 1 Spec.
continuous	40.0	40.0	--
1/10	40.0	40.0	± 0.5 dB
1/10 ²	40.0	40.0	
1/10 ³	40.0	40.0	± 1.0 dB
1/10 ⁴	40.0	40.0	

Uncertainty : ± 0.1 dB

Remark : 1. UUT : Unit-Under-Test

2. The uncertainty claimed is for a confidence probability of not less than 95%.

3. Atmospheric Pressure : 1 009 hPa.

----- END -----

APPENDIX F – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Air Quality								
AQ01	Dust emission from construction site in general	Cap 311, sub leg R Schedule III S.13	Hoardings of not less than 2.4m high from ground level should be erected along the entire length of the site boundary except for site entrance or exit.	✓			✓	
AQ02	Dust emission from construction site in general	Cap 311, sub leg R Schedule III S.13 & PS 26.10(6)(i)(e)	To minimize dust emissions, the amount of soil exposed and the dust generation potential should be kept as low as possible. This can be accomplished by water sprays, surface compaction; temporary fabric covers, minimizing the extent of exposed soil, and prompt re-vegetation of completed earthworks.	✓		✓	✓	
AQ03	Dust emission from construction site in general	Cap 311, sub leg R Schedule III S.13 & PS 26.10(6)(i)(j)	Wheel washing facilities should be provided at all vehicle site entrances/exits to prevent dusty material from being carried off-site on vehicles and deposited on public roads. The facilities shall be provided in advance of any major construction activities.	✓				Summit is under preparation while the Waterfront has installed.
AQ04	Dust emission from site clearance	Cap 311, sub leg R Schedule IV S.26 (1), (2) & PS 26.10(6)(i)(l)	The working area for uprooting of trees, shrubs or vegetation or for the removal of boulders, poles, pillars or temporary or permanent structures shall be sprayed with water or a dust suppression agent immediately before, during and immediately after the operation so as to maintain the entire surface wet.		✓		✓	
AQ05	Dust emission from excavation or earth moving	Cap 311, sub leg R Schedule III S.24	The heights from which excavated materials are dropped should be minimized to limit fugitive dust generation from loading/unloading.	✓			✓	
AQ06	Dust emission from excavation or earth moving	Cap 311, sub leg R Schedule III S.24	Working areas of any excavation or earth moving operation will be sprayed with water.		✓		✓	

APPENDIX F – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
Air Quality								
				Site Installation	Method Statement	Toolbox Talk		
AQ07	Access Road	PS 26.10(6)(i)(g)	Effective water sprays should be used on the site to dampen potential dust emission sources such as unpaved areas used by site traffic and active construction areas.		✓	✓	✓	
AQ08	Access Road	Cap 311, sub leg R Schedule III S.14 (1) & PS 26.10 (6)(i)(a)	Areas of site with regular movement of vehicles shall have an approved hard surface and be kept clean of loose material.	✓			✓	
AQ09	Access Road	PS 26.10 (6)(i)(d)	All on-site motorized vehicles speeds shall be restricted to a max. speed of 10km/h and delivery vehicles to designated roadways inside the Site to reduce dust re-suspension and dispersion.			✓	✓	
AQ10	Access Road	Cap 311, sub leg R Schedule III S.14 (1) & PS 26.10(6)(i)(a)	The roadway between the wheel wash and the public road will be paved.	✓			Under preparation	
AQ11	Dust emission from material transporting and handling	PS 26.10(6)(i)(h) & (i)	Vehicles transporting materials with the potential to generate dust should have properly fitting side and tailboards.	✓		✓	✓	
AQ12	Dust emission from material transporting and handling	PS 1.110 (a)	The cover of the bed of dump truck shall be power operated with manual backup, so that the operator would not need to climb on the dump bed to operate the cover (both under power mode and manual mode). Operation from driver cab or with the operator standing on ground is acceptable. After the cover to the dump bed is closed, any gap left on the system of enclosure should be less than 25mm wide measured in a direction across the gap. Any remaining gap is to be sealed up tightly with a layer of nylon bristle of sufficient length to bridge across the gap.	✓		✓	✓	

APPENDIX F – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Air Quality								
AQ12	Dust emission from material transporting and handling	Cap 311, sub leg R Schedule IV S.26 (1)	Materials transported by vehicles should be covered, with the cover properly secured and extended over the edges of the side and tail boards.	✓		✓	✓	
AQ13	Dust emission from material transporting and handling	PS 26.10(6)(i)(k)	Spraying all dusty materials with water prior to any loading, unloading or transfer operation so as to maintain the dusty material wet.	✓		✓	✓	
AQ14	Dust emission from material transporting and handling	PS 26.10(6)(i)(a)	Material storage and handling areas shall be located on hard core or paved.	✓		✓	✓	
AQ15	Dust emission from material transporting and handling	Cap 311, sub leg R Schedule IV S.26	All stockpiled aggregate or spoil of more than 50 m ³ should be enclosed or covered and water applied twice per day during dry or windy conditions.	✓		✓	✓	
AQ16	Dust emission from materials transporting and handling	Cap 311, sub leg R Schedule III S.15 (1) & PS 26.10(6)(i)(f)	Stockpiles of dusty materials shall be covered and minimized the extent of spoil exposed at any given time.	✓		✓	✓	
AQ17	Dust emission from materials transporting and handling	Cap 311, sub leg R Schedule III S.15 (1)	Every stock of more than 20 bags of cement shall be covered entirely by impervious sheeting or placed in an area sheltered on the top and the 3 sides.	✓		✓	✓	
AQ18	Dust emission from materials transporting and handling	Cap 311, sub leg R Schedule III S.15 (1) & PS 26.10 (6)(i)(b)	Material conveyors for the transfer of dusty materials shall be fitted with windboards and enclosed conveyor transfer points and hopper discharge areas to minimize dust emission.	✓	✓		0	
AQ19	Dust emission from materials transporting and handling	PS 26.10 (6)(i)(c)	Totally enclosing all conveyors carrying materials which have the potential to create dust and fitting them with belt cleaners.	✓	✓		0	
AQ20	Dust emission from materials transporting and handling	PS26.16 (2)(ii)	Profiled steel cladding should be provided at two sides of loading point at barge.	✓	✓		0	

APPENDIX F – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Air Quality								
AQ21	Dust emission from materials transporting and handling	PS 26.16 (2)(iii)	Dust suppression sprays should be installed and operated in strategic locations at the feeding inlet and outlet.	✓	✓		0	
AQ22	Dust emission from materials transporting and handling	PS 26.16 (2)(iv)	The barging point should be placed within a totally enclosed structure incorporating an enclosed chute for material transfer to barge.	✓	✓		0	
AQ23	Dust emission from materials transporting and handling	PS 26.16 (2)(iv)	Flexible curtain should be hanged on the enclosed chute to prevent dust emission when excavated material/rocks are transported into the barge.	✓	✓		0	
AQ24	Dust emission from materials transporting and handling	Cap 311, sub leg R Schedule III S.15	Debagging of cement and similar materials to be done in a ventilated enclosure with a filtered extraction system.	✓		✓	0	
AQ25	Dust Emission from Blasting	Cap 311, sub leg R Schedule IV S.27 (1), (2)	Wet the area within 30m from the blasting area with water prior to blasting.	✓	✓		0	
AQ26	Dust Emission from Blasting	Cap 311, sub leg R Schedule IV S.27 (1), (2)	Wire mesh, gunnysack and sandbag should be used on top of the blast area on each shot to prevent flying rock and reduce fugitive dust generation.	✓			0	
AQ27	Dust Emission from Blasting	Cap 311, sub leg R Schedule IV S.27 (1), (2)	Do not carry out blasting when the strong wind signal or tropical cyclone warning no. 3 is hoisted unless prior permission of the Commissioner of Mines is obtained.		✓	✓	0	
AQ28	Dust Emission from Blasting	Cap 311, sub leg R Schedule IV S.27 (1), (2)	Blasting shall not be carried out when a Hong Kong Observatory Thunderstorm Warning is in force.		✓	✓	0	
AQ29	Dust Emission from Blasting	Cap 311, sub leg R Schedule IV S.27 (1), (2)	Use of vacuum extraction drilling methods and sequenced the blasting works carefully.		✓		0	

APPENDIX F – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Air Quality								
AQ30	Dust Emission from Blasting	Cap 311, sub leg R Schedule IV S.27 (1), (2); PS 26.13(4)(iv)	Firing of explosive shall be carried out in the morning prior to opening of the Park.	✓	✓	✓	0	
AQ31	Dust Emission from Tunnel		Exhausts from tunnel ventilation should face away from sensitive receivers.	✓	✓	✓	0	
AQ32	Dust Emission from Tunnel		Forced ventilation shall be maintained in the tunnel to ensure noxious or asphyxiating gases do not accumulate. At the tunnel access shaft or portal the expelled air shall be vented to the atmosphere ensuring adequate diffusion of gases. Expelled air shall be directed away from nearby buildings.	✓	✓	✓	0	
AQ33	Dust Emission from Tunnel		Tunnel ventilation containing high level of Total Suspended Particulates (TSP) shall be filtered at least to the satisfaction of the Safety and Environmental Officers prior to being vented to the atmosphere. The filters should be changed weekly to prevent blockages, which may affect the performance of the system.	✓		✓	0	
AQ34	Dust Emission from Crushing Plant	PS 26.10(2)	The crushing plant shall be operated in accordance with the specified process licence.	✓		✓	0	
AQ35	Gas Emission Smoke/fume from construction plants and equipments	Cap 311, sub leg C S.3	All plants and equipments should be well maintenance to avoid dark smoke.	✓		✓		An owner, who operates any plant in such a manner that any dark smoke is emitted for more than 6 minutes in any period of 4 hours or for more than 3 minutes continuously at any one time, commits an offence.
AQ36	Smoke/fume from construction plants and equipments	Cap 311, sub leg A S.4, 5 & 6	Prior approval should be obtained before the installation of the emergency generator.	✓			N/A	Include in the design

APPENDIX F – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Air Quality								
AQ37	Smoke from open burning	Cap 311, sub leg O S.4 (1)	Open burning for the purpose of disposal of construction waste/tyres, the salvage of metal or the clearance of site in preparation for construction work is prohibited.			✓	✓	
AQ38	Smoke/fume from all site vehicles	Cap 374, sub leg A S.31(1)	Black smoke should be avoided from any vehicle whether or not mechanically propelled which is constructed or adapted for use on roads (exclude a vehicle of the North-west Railway or a tram)	✓		✓	✓	
AQ39	Smoke/fume from all site vehicles	Cap 311, sub leg L Schedule I	Ensure the correct diesel used in any vehicle whether or not mechanically propelled which is constructed or adapted for use on roads (exclude a vehicle of the North-west Railway or a tram)		✓	✓	✓	
AQ40	Emission from spraying products	Cap 403, sub. leg C s.3	Ozone depleting paint sprayers shall not be used on sites.		✓	✓	✓	
Noise/Vibration								
NV01	Noise from construction work other than percussive piling	Cap 400, S.6(1), PS 26.11 (2)	Work required for the use of powered mechanical equipment (PME) in restricted hours, i.e. the hours between 7pm and 7am on weekdays or at any time on Sundays or a public holiday, for carrying out construction activity shall be required a valid Construction Noise Permit (CNP).		✓	✓	✓	
NV02	Noise Emission from construction plants and equipments	PS 26.11 (9)	Relocation of noise-emitting plant, the use of silencers, mufflers, acoustic sheds or shields or acoustic sheds or screens upon the best reasonable practice.	✓		✓	✓	
NV03	Noise Emission from construction plants and equipments	PS 26.11 (10)	Maintain all plant and silencing equipment in good condition so as to minimize the noise emission during the works.			✓	✓	

APPENDIX F – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
Noise/Vibration								
				Site Installation	Method Statement	Toolbox Talk		
NV04	Noise Emission from construction plants and equipments	Cap 400, sub. leg. C, s17(1)	Compressors should have Noise Emission Labels (NELS).			✓	✓	
NV05	Noise Emission from construction plants and equipments	Cap 400, sub. leg. D, s17(1)	Hand held breakers should have Noise Emission Labels (NELS).			✓	✓	
NV06	Noise Emission from construction plants and equipments	PS 26.11 (13)(i)	If the work causing serious noise pollution impacts or reached the Target Limit as stated in the Contractor's EM&A Manual, the Contractor shall provide the following proposed remedial measures: • Change of construction equipment location and scheduling of activities; • Change of construction equipment location and scheduling of activities; • Installation of construction equipment soundproofing; • Provision of alternative Contractor's equipment; • Erection of sound barriers around the part of the Site or the location of the construction noise source; or • Any other measures that may be effective in reducing noise.	✓	✓	✓	✓	
NV07	Noise Emission from Blasting	PS 26.13(4)(iv)	Firing of explosive shall be carried out in the morning prior to opening of the Park.	✓	✓	✓	0	

APPENDIX F – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Noise/Vibration								
NV08	Noise Emission from Blasting	GEP Technical Guidance Note No. 25 (TGN 25)	Blast doors on tunnels to be closed during blasting if required by the blasting period.	✓		✓	0	
NV09	Noise Emission for Vehicles	Cap 374, sub leg A S.30(1)	Every vehicle propelled by an internal combustion engine shall be fitted with a silencer, expansion chamber or other contrivance suitable and sufficient for reducing, as far as may be reasonable, the noise caused by the escape of the exhaust gases from the engine.	✓		✓	✓	
Water Quality (Refer to Drainage Management Plan as stated in PS 26.17(7))								
WQ01	Flooding and wastewater including surface runoff discharges from the construction site/work to inland coastal waters, communal sewers and drains	PS 26.12 (2)	Before commencing any site formation work, all sewer and drainage connection should be sealed to prevent debris, soil, sand and etc from entering public sewers/drains	✓		✓	The existing drainage system is in use and the temporary drainage system is under preparation	
WQ02		PS 26.12 (2)	The boundaries of critical areas of earthworks should be marked and surrounded by dykes or embankments for flood protection.	✓			N/A	
WQ03		PS 26.12 (2)	Wheel wash water shall be changed frequently and sediment removed regularly	✓		✓	✓	
WQ04		PS 26.12 (2)	Construction runoff related impacts associated with tunneling and above ground construction activities can be readily controlled through the use of appropriate mitigations measures which include: • Use of sediment traps, oil interceptors; and • Adequate maintenance of drainage systems to prevent flooding and overflow.	✓	✓	✓	0	0

APPENDIX F – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Water Quality (Refer to Drainage Management Plan as stated in PS 26.17(7))								
WQ05	Flooding and wastewater including surface runoff discharges from the construction site/work to inland coastal waters, communal sewers and drains	PS 26.12 (2)	Exposed areas should be minimised to reduce the potential for increased siltation, runoff contamination, and erosion.	✓	✓	✓	✓	
WQ06	site/work to inland coastal waters, communal sewers and drains	EIA Ref. S9.44 EM&A Ref. S8.3	Temporary ditches should be provided to facilitate runoff discharge into the appropriate watercourses via silt retention points.	✓	✓	✓	0	
WQ07	Flooding and wastewater including surface runoff discharges from the construction site/work to inland coastal waters, communal sewers and drains	EPD ProPECC Note No. PNI/94; PS 26.17(6)(ii)	The design of efficient silt removal facilities should be based on the guidelines in Appendix A1 of ProPECC Note PN 1/94.	✓	✓		0	
WQ08	site/work to inland coastal waters, communal sewers and drains	EP Clause 2.13	To improve the coagulation and sedimentation process for construction phase discharges from excavation works at Headland, sand/silt removal facilities, including sand/silt traps and sediment basins should be provided.	✓		✓	0	Drainage Proposal
WQ09	Flooding and wastewater including surface runoff discharges from the construction site/work to inland coastal waters, communal sewers and drains	PS 26.12(4)	All exposed earth areas should be completed as soon as possible after earthworks have been completed, or alternatively, within 14 days of the cessation of earthworks where practicable.		✓		0	
WQ10	waters, communal sewers and drains	PS 26.12	If excavation of soil cannot be avoided during the rainy season, or at any time of year when rainstorms are likely, exposed slope surfaces should be covered by tarpaulin or other means.	✓	✓	✓	0	
WQ11	Flooding and wastewater including surface runoff discharges from the construction site/work to inland coastal waters, communal sewers and drains	PS 26.12(6)(iv)	Sediment tanks of sufficient capacity are recommended as a general mitigation measure that can be used for settling surface runoff prior to disposal. The system capacity should be flexible and able to handle multiple inputs from a variety of sources and particularly suited to applications where the influent is pumped.	✓		✓	0	
WQ12		PS 26.12(6)(ii)	All silt removal facilities will be inspected daily and cleaned whenever necessary.			✓	0	

APPENDIX F – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Water Quality (Refer to Drainage Management Plan as stated in PS 26.17(7))								
WQ13	Flooding and wastewater including surface runoff discharges from the construction site/work to inland coastal waters, communal sewers and drains	PS 26.12(6)(iv)	Manholes (including newly constructed ones) should always be adequately covered and temporarily sealed so as to prevent silt, construction materials or debris being washed into the drainage system and storm runoff being directed in to foul sewers.		✓	✓	✓	
WQ14	Flooding and wastewater including surface runoff discharges from the construction site/work to inland coastal waters, communal sewers and drains	EP Clause 2.12 & 2.14; PS 26.17(6)(iii)	Design and install a silt curtain system to enclose the existing 1000mm diameter storm water pipe outlet at Tai Shue Wan to minimize the water quality impacts on the marine environment during rainy seasons.	✓	✓		✓	Silt curtain proposal was deposited in the EIAO Register Office for public inspection.
WQ15	Flooding and wastewater including surface runoff discharges from the construction site/work to inland coastal waters, communal sewers and drains	EPD ProPECC Note No. PN1/94; PS 26.17(8)(e)	Precautions should be taken at any time of year when rainstorms are likely. Actions to be taken when a rainstorm is imminent or forecast, and actions to be taken during or after rainstorms, are summarized in Appendix A2 or ProPECC Note PN 1/94. Particular attention should be paid to the control of silty surface runoff during storm events, especially for areas located near steep slopes.			✓	0	Heavy rain procedures
WQ16	Flooding and wastewater including surface runoff discharges from the construction site/work to inland coastal waters, communal sewers and drains	PS 26.12(6)(i)	Oil interceptors should be provided in the drainage system and these should be regularly cleaned to prevent the release of oils and grease into the storm water drainage system after accidental spillages. The interceptor should have a bypass to prevent flushing during periods of heavy rain.	✓			0	
WQ17		PS 26.12(2)	All vehicles and plant should be cleaned before leaving a construction site to ensure no earth, mud, debris and the like is deposited on roads.			✓	✓	

APPENDIX F – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Water Quality (Refer to Drainage Management Plan as stated in PS 26.17(7))								
WQ18		PS 26.12	Measures should be taken to prevent the washing away of construction materials, soil, silt or debris into any drainage system.	✓			✓	
WQ19	Flooding and wastewater including surface runoff discharges from the construction site/work to inland coastal waters, communal sewers and drains	PS 26.12(6)(iii)	An adequately designed and located wheel washing bay should be provided at every site exit and wash-water should have sand and silt settled out and removed at least on a weekly basis to ensure the continued efficiency of the process.	✓			0	
WQ21		PS 26.12	Open stockpiles of construction materials of more than 50m ³ should be covered with tarpaulin or similar fabric.			✓	0	
WQ20		PS 26.12	The section of access road leading to, and exiting from, the wheel wash bay to the public road should be paved with sufficient backfall towards the wheel wash bay towards the wheel wash bay to prevent transport of soils and silty water to public roads and drains.	✓			0	
Drainage and Sewage (Refer to Drainage Management Plan as stated in PS 26.17(7) and Drainage Proposals as stated in EP Clause 2.13)								
DS01	Polluted water discharge from construction site or works	PS 26.17(4)	All temporary and permanent drainage pipes and culverts provided to facilitate runoff discharges should be adequately designed for the controlled release of storm flow (one in five year event).	✓			✓	Drainage Proposal
DS02	Polluted water entry stormwater system during the site activities	PS 26.17(6)	All sediment control measures should be regularly inspected and maintained to ensure proper and efficient operation at all times and particularly following rain storms.	✓			0	
DS03	Polluted water from site reinstatement	PS 26.17(2)	Temporarily diverted drainage systems should be reinstated to their original condition when the construction work has finished, or the temporary diversion is no longer required.				0	Note

APPENDIX F – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Drainage and Sewage (Refer to Drainage Management Plan as stated in PS 26.17(7) and Drainage Proposals as stated in EP Clause 2.13)								
DS04	Polluted water from concrete lorry washing	PS 26.17	Wash water from concrete trucks and pumps is to be collected in skips for treatment.	✓		✓	✓	
DS05	Polluted water from the plant yard	WMP	Plant maintenance areas to be enclosed.	✓			0	
DS06	Polluted water from excavation	PS 26.17(6)(ii)	Temporary open storage of excavated materials used for backfill on site should be covered with tarpaulin or similar fabric during rainstorms. Any washout of construction or excavated materials should be diverted through appropriate sediment traps before discharge to storm water drainage systems.			✓	0	
DS07	Polluted water entry from waste collected area	PS 26.18(2)	Debris and rubbish on site should be collected, handled and disposed of properly to avoid entering the water column to cause water quality impacts.	✓		✓	✓	
DS08	Polluted water and sewage entry the chemical toilets	PS 26.12(3)	Construction sewage may need to be handled by portable chemical toilets if construction workers are likely to be dispersed along the alignment.	✓			✓	
DS09	Polluted water and sewage entry the chemical toilets	PS 26.12(3)	Appropriate numbers of portable toilets should be provided by a licensed contractor to serve the construction workers. This contractor will also be responsible for waste disposal and maintenance practices.	✓			✓	
DS10	Polluted water from chemical storage area	PS 26.12(9)	All fuel tanks and storage areas should be provided with locks and be located on sealed areas, within bunds of a capacity equal to 110% of the storage capacity of the largest tank, to prevent spilled fuel oils from reaching WSRs.	✓			✓	
DS11	Polluted water from spillage	WMP; PS 26.12(10)	Spill action plan is to be prepared.			✓	✓	Spill procedures
DS12	Polluted water from petrol filling activity	WMP; PS 26.17(8)(i)	Petrol interception for oil filling point.	✓			0	

APPENDIX F – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Drainage and Sewage (Refer to Drainage Management Plan as stated in PS 26.17(7) and Drainage Proposals as stated in EP Clause 2.13)								
DS13	Polluted water from tunnel pump out	PS 26.17(8)	Ground water pumped from tunnels etc., should be discharged into drainage channels that incorporate sediment traps to entrance deposition rates and to remove silt.	✓			0	
DS14	Polluted water from construction works	PS 26.17(8)(i)	Construction work force sewage discharges on site should be connected to the existing trunk sewer or sewage treatment facilities, if practicable.	✓		✓	✓	
DS15	Polluted water from pantry	PS 26.17(8)(k)	Wastewater collected from pantry including that from basins, sinks and floor drains, should be discharged into foul sewers via grease traps capable of providing at least 20 minutes retention during peak flow.	✓			0	
Waste Management (Refer to Waste Management Plan as stated in EP Clause 2.21)								
WM01	Disposal of waste (general)	PS 26.18	Minimize the generation of waste from Works. Avoidance and minimization of waste generation shall be achieved through changing or improving design and practices, careful planning and good site management.			✓	✓	Note
WM02	Disposal of waste (general)	PS 26.18	Different types of waste are segregated on-site and stored in different containers, skips or stockpiles to facilitate the reuse/recycling of materials, thus avoiding disposal (generally with only limited processing and reprocessing may be required).	✓		✓	✓	
WM03	Disposal of waste (general)	WMP	A trip ticket system for the disposal of Construction and Demolition (C&D) materials following the guidelines stipulated in the Environment, Transport and Works Bureau Technical Circular (Works) No. 31/2004 shall be used to prevent any illegal dumping.			✓	✓	

APPENDIX F – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Waste Management (Refer to Waste Management Plan as stated in EP Clause 2.21)								
WM04	Disposal of waste (general)	PS 26.18	No construction waste of more than 20% inert material by volume shall be disposed of to landfill. Inert materials like rock, sand, concrete debris should be sorted out from construction waste before disposal. Dry concrete waste or the excavated materials should be recycled for reuse or sorted for disposal at public dumps.			✓	✓	
WM05	Generation and disposal of construction and demolition waste	WMP; PS 26.18	All non-inert construction waste material deemed unsuitable for reclamation or land formation and all other waste material shall be disposed at public dumps.	✓		✓	✓	Note
WM06	Generation and disposal of construction and demolition waste	WMP; PS 26.18	The C&D materials shall be sorted into public fill (inert portion) and C&D waste (non-inert portion). The inert portion which comprises soil, rock, concrete, brick, cement plaster/mortar, inert building debris, aggregates and asphalt shall be reused in earth filling, reclamation or site formation works as far as possible. Where excavated rock is of the appropriate grade, it shall be crushed and reused as aggregate or for other surfacing uses, wherever possible. The non-inert portion, which comprises metal, timber, paper, glass, junk and general garbage shall be reused or recycled.	✓	✓	✓	✓	
WM07	Disposal of waste (general)	WMP; PS 26.18	Record of the amount of waste generated, recycled and disposed of shall be kept on site for easy reference and checking.			✓	✓	
WM08	Disposal of waste (general)	WMP; PS 26.18	Authorized/Licensed Waste Hauliers/Collectors should be used to collect and transport different category wastes to the appropriate disposal points.			✓	✓	

APPENDIX F – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Waste Management (Refer to Waste Management Plan as stated in EP Clause 2.21)								
WM09	Disposal of waste (general)	WMP; PS 26.18	Handle and store wastes in a manner, which ensures that they are held securely without loss or leakage, thereby minimizing the potential for pollution.			✓	✓	Note
WM10	Disposal of waste (general)	WMP; PS 26.18	Remove wastes in a timely manner and maintain the waste storage areas clean regularly.			✓	✓	
WM11	Disposal of waste (general)	WMP; PS 26.17(8)	Regular cleaning and maintenance the drainage system, sumps, oil interceptors and grease traps. The waste from these facilities shall be collected and disposed of by a licensed Collector.	✓		✓	0	
WM12	Disposal of waste (general)	WMP	Obtain the necessary permits and licenses with regards to the waste management from the appropriate authorities wherever necessary, in accordance with - The Waste Disposal Ordinance (Cap 354), - Waste Disposal (Chemical Waste)(General) Regulation (Cap 354), - The Crown Land Ordinance (Cap 28), and - Dumping at Sea Ordinance (Cap 466)			✓	0	
WM13	Disposal of waste (general)	WMP	Provide training for workers about the concepts of site cleanliness and appropriate waste management procedures, including waste reduction, reuse and recycling.			✓	✓	
WM14	Generation and disposal of construction and demolition waste	WMP & WBTC 5/99 (Appendix A)	The Contractor shall produce a Construction and Demolition Material Disposal Delivery Form (the Form) for each and every vehicular trip transporting Construction and Demolition (C&D) materials off-site. The Contractor shall complete the Form and maintain records as per procedures.			✓	✓	

APPENDIX F – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Waste Management (Refer to Waste Management Plan as stated in EP Clause 2.21)								
WM15	Production of Chemical Waste (general)	Magnitude	For those processes that generate chemical waste, it may be possible to find alternatives that generate reduced quantities or even no chemical wastes, or less dangerous types of chemical waste	✓	✓		0	
WM16	Production of Chemical Waste (general)	Cap 354 sub. leg. C; PS 26.18 (4)	The Contractor shall be required to register with EPD as a chemical waste producer and to follow the guidelines as stated in the Code of Practice on the Packaging, Labeling and Storage of Chemical Wastes.				✓	Register as chemical waste producer has done
WM17	Storage of Chemical Waste	Cap 354 sub. leg. C s. 13, 14, 15, 16, 18 & 19; PS 26.18(4)	Chemical waste that is produced, as defined by Schedule 1 of the Waste Disposal (Chemical Waste)(General) Regulation, should be handled in accordance with the Code of Practice on the Packaging, Labeling and Storage of Chemical Wastes as follows: - A suitable area (special container(s) would be proposed to use) for temporary storage of chemical waste shall be provided. The best location for the storage area shall be located close to the source of chemical waste generation. - The container used for the storage of chemical waste should be used for chemical waste only and kept clean and dry all the times. - The container shall be suitable for the substance they are holding, resistant to corrosion, maintained in a good condition, and securely closed.	✓			0	
				✓		✓	0	
				✓		✓	0	

APPENDIX F – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Waste Management (Refer to Waste Management Plan as stated in EP Clause 2.21)								
WM17 (contd)	Storage of Chemical Waste	Cap 354 sub. leg. C s. 13, 14, 15, 16, 18 & 19; PS 26.18(4)	The container should have a capacity of less than 450 l unless the specifications have been approved by EPD.	✓			0	
			If the container is not used as the storage, the storage area shall be enclosed on at least three sides by a wall, partition or fence with a height of not less than 2m or the total height in stack, whichever is less.	✓		✓	0	
			Adequate ventilation shall be allowed by leaving some space between the top of the enclosure walls and ceiling, or provision of louvers on the sides of the enclosure walls.	✓		✓	0	
			The storage area should have an impermeable floor and bunding of sufficient capacity to accommodate 110% of the volume of the largest container or 20% of the total volume of waste stored in that area, whichever is the greatest	✓		✓	0	
			The storage area should be covered to prevent rainfall entering (water collected within the bund must be tested and disposed as chemical waste if necessary)	✓		✓	0	
			Every chemical waste storage area should display a hazard-warning panel, notice or marking at or near the entrance or opening of the storage area in English and Chinese characters “CHEMICAL WASTE” and “化學廢物” clearly and boldly in red on a white background with a letter/character size of not less than 60mm high.	✓		✓	0	

APPENDIX F – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Waste Management (Refer to Waste Management Plan as stated in EP Clause 2.21)								
WM18	Disposal of Chemical Waste	WMP; PS 26.18	Disposal of chemical waste be to a facility licensed to receive chemical waste, such as the Chemical Waste Treatment Facility that also offers a chemical waste collection service and can supply the necessary storage containers, or to a re-user of the waste under approval from EPD.			✓	0	
WM19	Disposal of Chemical Waste	Cap 354, sub. leg. C s21 & 22	Disposal of chemical waste should be via a licensed waste collector.			✓	0	
WM20	Generation of general refuse	Cap 311, sub leg O S.4 (1)	Law prohibits the burning of refuse on construction sites.			✓	✓	
WM21	Generation of general refuse	Magnitude	Office wastes can be reduced through recycling of paper if volumes are large enough to warrant collection. Participation in a local collection scheme should be considered if one is available.	✓		✓	✓	
WM22	Generation of general refuse	WMP	General refuse generated on site should be stored in enclosed bins or compaction units separate from construction and chemical wastes. A reputable waste collector should be employed to remove general refuse from the site, separately from construction and chemical wastes, on a daily or every second day basis to minimize odour, pest and litter impacts.	✓		✓	✓	
WM23	Generation of general refuse	Magnitude	General refuse will be generated largely by food service activities on site, so reusable rather than disposable dishware should be used if feasible. Individual collectors often recover aluminum cans from the waste stream if they are segregated or easily accessible, so separate labeled bins for their deposit should be provided wherever feasible.	✓		✓	✓	

APPENDIX F – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Ecology								
EC01	Ozone Emission entry the ambient environment	PS 26.08 (3) (i)	Ozone depleting fire extinguishers shall not be used for temporary firefighting measures and ozone depleting substances shall not be used in carrying out the Works.				✓	Note restriction
EC02	Disturbance the marine ecological sensitive receivers	EP Clause 2.12; PS 26.14(5)	Divert the construction phase discharges from excavation works at Headland to an existing 1000mm diameter storm water pipe outlet at Tai Shue Wan to avoid impacts on coral communities in the marine water around the Nam Long Shan headland.	✓			✓	Drainage Proposal
EC03	Disturbance the marine ecological sensitive receivers	EP Clause 2.15	No marine-based construction works shall be allowed for the Project to conserve the marine ecological resources in the vicinity of the project area.	✓	✓		✓	
EC04	Disturbance the ecological sensitive receivers	EP Clause 2.17 & PS 26.14 (1)	The site clearance works before bulk excavation to the existing mountain to provide a new platform for the Summit shall commence before or outside the breeding season of Black Kites, i.e. from October to May of the next year.	✓	✓		✓	
EC05	Disturbance the ecological sensitive receivers	PS 26.14 (2)	Design of temporary conveyor belt system and the location of temporary adit portals should be considered to avoid impact to potential nest sites in the tall shrubland habitat at Tai Shue Wan area where possible.	✓	✓		0	
EC06	Disturbance the ecological sensitive receivers	EP Clause 2.19	No construction works and discharge from the construction site(s) shall be allowed within the existing freshwater ponds at the Tai Shue Wan area and within the enhanced Pond 35 after enhancement works.	✓			0	

APPENDIX F – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Ecology								
EC07	Disturbance the ecological sensitive receivers	EM&A section 6.2.5	Minimize the impact due to construction on the existing surrounding vegetation by: - Set up of temporary tree nurseries; - Designation of “no-intrusion zones” and to record any trespass, including the damage to the existing vegetation; - Hill fire prevention; - Dust and erosion control for exposed soil; and - Well-planned irrigation networks throughout the establishment period.	✓		✓	✓	
				✓		✓	✓	
				✓	✓	✓	✓	
EC08	Disturbance the ecological sensitive receivers	EM&A section 7.17 & EIA section 5.138	Minimize the impact due to construction on the uncommon plant species by: - Vegetation survey and subsequent transplantation of locally uncommon or restricted species as far as practicable; - Trees located within the works areas shall be preserved as far as practicable; - Placement of equipment or stockpile in designated works areas and access routes selected on existing disturbed land to minimize disturbance to natural habitats; - Construction activities shall be restricted to the works areas that would be clearly demarcated;	✓	✓	✓	✓	Uncommon or restricted species including Long Tentacle Orchid, Sword-leaved Orchid, Green-flowered Rattlesnake-Plantain, Cycad-fem, Balloon Flower and Chinese Lily

APPENDIX F – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
Ecology								
EC08 (cont'd)	Disturbance the ecological sensitive receivers	EM&A section 7.17 & EIA section 5.138	- The work areas shall be reinstated immediately after the completion of works; - Landscaping works on newly formed land shall as far as possible make use of native plant species.	✓			✓	
			✓				✓	
Hazard to Life								
HL01	Hazard to life due to blasting activities	EM&A section 11.3 & EIA Section 12.15	The blasting activities shall be inspected and audited at practical intervals to ensure that the assumptions and recommendations from the Quantitative Risk Assessment (QRA) study are implemented.	✓	✓	✓	0	
HL02			The recommendations from the systematic hazard identification are consistently implemented in accordance with the intent of the hazard to life assessment.	✓	✓	✓	0	
Landscape and Visual								
LV01	Visual and Appearance considerations	EM&A Section 6.2.5	Minimize the visual and appearance impact by: 1. careful choice between 'impermeable' and 'permeable' hoardings. 2. control over the appearance of construction workers, construction plants/ machines. 3. proper screening and careful alignment of the temporary barging point and conveyor system. 4. careful selection of security floodlights to avoid light pollution.	✓			✓	
						✓	0	In the design
				✓			✓	

APPENDIX F – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Cultural and Heritage Impact								
CH01	Cultural and Heritage Impact	EP clause 2.22	To preserve the grave G1, no works shall be allowed within one metre from the vicinity of such grave.	✓		✓	✓	Note requirement

Notes: EP denotes the Environmental Permit No. 249/2006 and its subsequent permits.

EM&A Manual denotes the Contractor specific EM&A Manual.

WMP denotes the Waste Management Plan.

EIA denotes the Final EIA Report No. AEIAR-101/2006.

PS denotes the Particular Specification of the Project.

✓ denotes implemented.

o denotes to be implemented.

APPENDIX G – EVENT AND ACTION PLANS

Event/Action Plan for Air Quality Monitoring

Event Action Level	Action		
	CET	Contractor	PMR IEC
Exceedance for one sample	1. Identify source. 2. Notify IEC, PMR and Contractor. 3. Conduct additional monitoring to investigate the causes. 4. Report the investigation results and if exceedance is due to contractor's construction works to the IEC, PMR and Contractor. 5. Increase monitoring frequency to once per 2 days for 24-hour TSP and daily for 1-hour TSP until exceedance stops if exceedances are considered related to contractor's construction works and report the results to IEC, PMR and Contractor.	1. Take immediate action to avoid further exceedance and rectify any unacceptable practice. 2. Submit air mitigation proposal to IEC and PMR for agreement if CET indicated that exceedance is related to the construction works. 3. Implement agreed proposal within a time scale agreed with PMR and IEC.	1. Confirm receipt of notification of failure in writing. 2. Notify Contractor. 3. Require Contractor to submit air mitigation proposal. 4. Ensure remedial measures are properly implemented.
Exceedance for two or more consecutive samples	5. Identify source. 6. Notify EPD, IEC, PMR and Contractor. 7. Conduct additional monitoring to investigate the causes. 8. Report the investigation results and if exceedances are due to contractor's construction works to EPD, IEC, PMR and Contractor within 3 working days after additional monitoring. 9. Increase monitoring frequency to daily for 24-hour TSP and 1-hour TSP if exceedances are considered related to contractor's construction works until exceedance stops, and report the results to EPD, IEC, PMR and Contractor. 10. If exceedances continue after 1-week monitoring events, request PMR to arrange meeting with PMR, IEC and contractor to discuss remedial actions.	1. Take immediate action to avoid further exceedance and rectify any unacceptable practice. 2. In consultation with the IEC, submit air mitigation proposal to IEC and PMR for agreement within 3 working days of notification if ET indicated that exceedances are related to construction works. 3. Implement agreed proposal within a time scale agreed with PMR and IEC. 4. Amend working methods if appropriate.	1. Confirm receipt of notification of failure in writing. 2. Notify Contractor. 3. Require Contractor to submit air mitigation proposal. 4. Ensure remedial measures are properly implemented.

APPENDIX G – EVENT AND ACTION PLANS (CONT'D)

Event/Action Plan for Air Quality Monitoring


Event Limit Level	Action			
	CET	Contractor	PMR	IEC
Exceedance for one sample	1. Identify source. 2. Notify EPD, IEC, PMR and Contractor. 3. Conduct additional monitoring to investigate the causes. 4. Report the investigation results and if exceedances are due to contractor's construction works to EPD, IEC, PMR and Contractor within 3 working days after additional monitoring. 5. Increase monitoring frequency to daily if exceedances are considered related to contractor's construction works until exceedance stops, and report the results to EPD, IEC, PMR and Contractor.	1. Take immediate action to avoid further exceedance and rectify any unacceptable practice 2. In consultation with the IEC, submit air mitigation proposal to IEC and PMR for agreement within 3 working days of notification if CET indicated that exceedances are related to construction works 3. Implement agreed proposal within a time scale agreed with PMR and IEC. 4. Amend working methods if appropriate.	1. Confirm receipt of notification of failure in writing. 2. Notify Contractor. 3. Require Contractor to submit air mitigation proposal. 4. Ensure remedial measures are properly implemented.	1. Review monitoring data and investigation report submitted by CET. 2. Discuss amongst PMR, CET and Contractor in order to formulate air mitigation proposal. 3. Review Contractor's air mitigation proposal and advise the PMR accordingly. 4. Supervise and confirm in writing the implementation of remedial measures.
Exceedance for two or more consecutive samples	1. Identify source. 2. Notify EPD, IEC, PMR and Contractor. 3. Conduct additional monitoring to investigate the causes. 4. Report the investigation results and if exceedances are due to contractor's construction works to EPD, IEC, PMR and Contractor within 3 working days after additional monitoring. 5. Increase monitoring frequency to daily if exceedances are considered related to contractor's construction works until exceedance stops, and report the results to EPD, IEC, PMR and Contractor. 6. If exceedances continue after 2 consecutive monitoring events, request PMR to arrange meeting with IEC and contractor to discuss remedial actions.	1. Take immediate action to avoid further exceedance and rectify any unacceptable practice. 2. In consultation with the IEC, submit air mitigation proposal to IEC and PMR for agreement within 3 working days of notification if CET indicated that exceedances are related to construction works. 3. Implement agreed proposal within a time scale agreed with PMR and IEC. 4. Amend working methods and proposal if appropriate. 5. Stop relevant portion(s) of works as required by PMR, CET and IEC.	1. Confirm receipt of notification of failure in writing. 2. Notify Contractor. 3. Require Contractor to submit air mitigation proposal. 4. Ensure remedial measures are properly implemented. 5. If exceedances continue arrange meeting with Contractor, IEC and CET and to consider what portion(s) of works should be further mitigated or have to stop.	1. Review monitoring data and investigation report submitted by CET. 2. Discuss amongst PMR, CET and Contractor in order to formulate air mitigation proposal. 3. Review Contractor's air mitigation proposal and advise the PMR accordingly. 4. Supervise and confirm in writing the implementation of remedial measures.

APPENDIX G – EVENT AND ACTION PLANS (CONT'D)

Event/Action Plan for Regular Construction Noise Monitoring

Event	Action			
	CET	Contractor	PMR	IEC
Action Level	1. Identify source. 2. Notify IEC, PMR and Contractor. 3. Conduct additional noise monitoring to investigate the causes. 4. Report the investigation results to the IEC, PMR and Contractor. 5. Discuss with Contractor for their formulation of remedial measures if the exceedance is related to construction works. 6. Conduct additional monitoring to check mitigation effectiveness.	1. Take immediate action to avoid further exceedance. 2. Submit noise mitigation proposals to ET, PMR and IEC. 3. Implement noise mitigation proposals.	1. Confirm receipt of notification of failure in writing. 2. Notify Contractor. 3. Require Contractor to propose remedial measures for the analysed noise problem. 4. Ensure remedial measures are properly implemented.	1. Review the analysed results submitted by the CET. 2. Review the proposed remedial measures by the Contractor and advise the PMR accordingly. 3. Supervise and confirm in writing the implementation of remedial measures
Limit Level	1. Identify source. 2. Notify EPD, IEC, PMR and Contractor. 3. Conduct additional noise monitoring and analyse Contractor's working procedures to determine possible cause of exceedance. 4. Provide interim report to EPD, IEC and PMR on the causes and proposed actions to be taken for the exceedances if exceedance is related to construction works. 5. Assess effectiveness by additional monitoring and report to EPD, IEC, PMR and Contractor the results. 6. If exceedance stops, cease additional monitoring.	1. Take immediate action to avoid further exceedance. 2. Submit proposals for remedial actions to CET, PMR and IEC within 3 working days of notification. 3. Implement the agreed proposals. 4. Resubmit proposals if problem still not under control. 5. Stop the relevant portion of works as determined by the PMR until the exceedance is abated.	1. Confirm receipt of notification of failure in writing. 2. Notify Contractor. 3. Require Contractor to propose remedial measures for the analysed noise problem. 4. Ensure remedial measures are properly implemented. 5. If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated.	1. Discuss amongst PMR, CET and Contractor on the potential remedial actions. 2. Review Contractor's remedial actions whenever necessary to assure their effectiveness and advise the PMR accordingly. 3. Supervise and confirm in writing the implementation of remedial measures.

APPENDIX H – COMPLAINT FLOW DIAGRAM AND COMPLAINT LOG

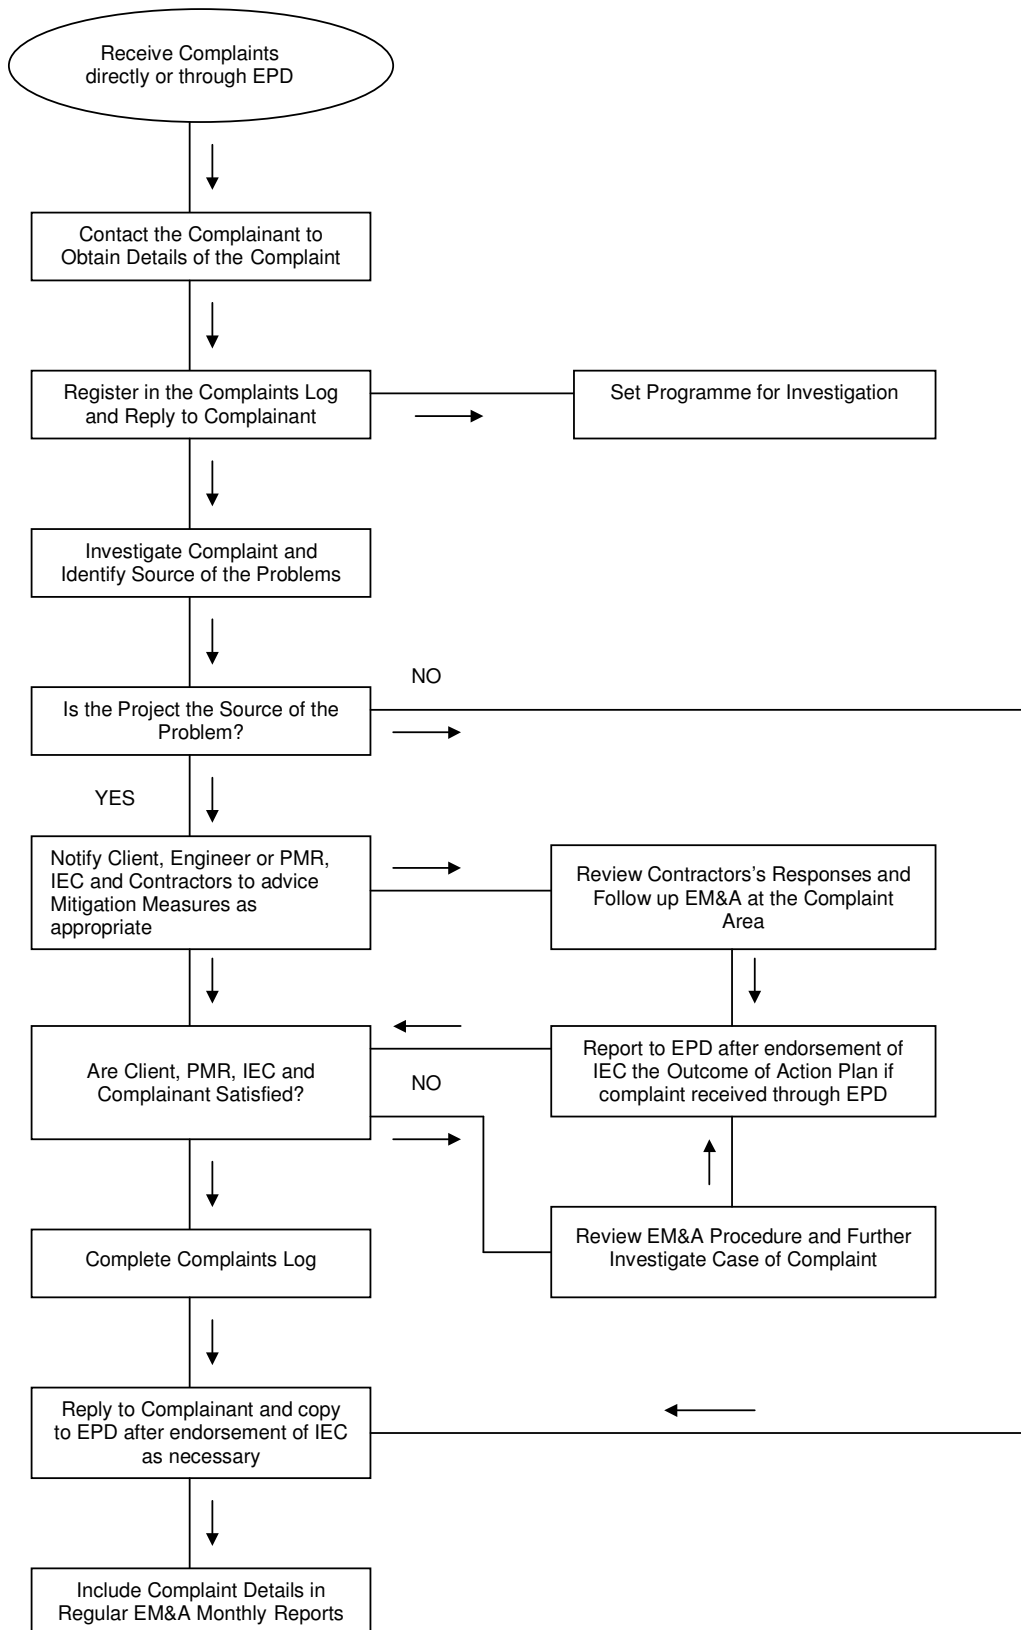

APPENDIX I – CONSTRUCTION PROGRAMME

	Early Start	Activity Description
CI05 - Tunnel, Site Formation & Misc.		
Cost Centre B-Misc. Site Formation at Waterfront		
Construction		
Hoarding for Portion 1 & 2 & Tree Felling		
	05/FEB/07A	Tree Felling at Waterfront
B1 - WW/Dinosaur/Butterfly/Around Panda + A&A		
	12/MAR/07A	Construct New Staircase for Panda House
B3 - Demolish Main Entr/WaterWorld/McDonalds-EP		
	03/MAY/07A	Demolition of Main Entrance - (EP Area)
	03/MAY/07A	Demolition - WaterWorld facilities (EP Area)
	03/MAY/07A	Demolition - McDonalds Building (EP Area)
B4 - Access Rd to Astounding Asia at Waterfront		
	29/MAR/07A	Access Rd to North Portal
	28/MAY/07	Install Salt Water mains
	31/MAY/07	Divert Existing Fresh/Saltwater&FS System Mains
	31/MAY/07	Access Rd from Ch. 100 - 300
	28/JUN/07	Install New Freshwater & FS System Mains
	28/JUN/07	Remove Existing Saltwater/Freshwater Mains
	06/JUL/07	Access Road Remaining Works
B6 - Filling Existing Lagoon at Goldfish Pagoda		
	20/MAR/07A	Pond 35 Enhancement
	07/JUL/07	Dredging at Lagoon Area
	03/AUG/07	Lagoon Fill
B7 - Underground FS Tank & Assoc. Fire Services		
	13/APR/07A	Lay new water supply main
	13/APR/07A	Lay power supply cables to new FS Tank Sys
	23/APR/07A	Installation and Testing
	08/JUN/07	WSD and FSD Inspection
Cost Centre C-Misc. Site Formation at Summit		
Construction		
Summit Hoarding & Tree Felling		
	28/MAY/07	Tree Felling for Overbridge Construction
C3 - Access Road & Overbridge		
	04/JUL/07	Form Temp. Access Road & Divert Existing Utility
	17/JUL/07	Site Formation & Erected A Temp. Bridge/Road
	31/JUL/07	Substructure Construction
C1/C2/C6 - Preparation Works - Summit Excav		
	02/JAN/07A	General Site Clearance for Haul Road
	12/MAR/07A	Cable Car Strengthening Works
	15/MAR/07A	Slope Stabilization works
	17/MAR/07A	Blasting Rockfall Fence+11KV Support(S. Haul rd)
	28/MAR/07A	PVC pipeline installation
	29/MAR/07A	Form service route & pipe supports on slope
	29/MAR/07A	Construct pipe trenches across NLS Rd (2 nos)
	12/MAY/07A	Demolition of Existing Structure at Summit
	15/MAY/07A	11KV Div to Intake Stn - Lay cable
	28/MAY/07	11KV Div. to Intake Station(Prep Work&Const)
	28/MAY/07	Drainage Works
	31/MAY/07	Construct pipe supports alongside access road
	04/JUN/07	11KV Div to Intake Stn-Joint new 95 sq.mm cable
	05/JUN/07	11Kv Shutdown system & joint cables rescue stair
	05/JUN/07	11KV Disconnect exist cable seawater station
	05/JUN/07	11KV Test entire cable,comp termination&Resume
	06/JUN/07	Slope Stabilization Completion Consent
	14/JUN/07	Hydraulic testing & flushing
	20/JUN/07	Connect to existing pipeline near pump house & H
C1/C2 - Explosive Magazine		
	19/MAY/07A	Explosive Magazine Construction
	08/JUN/07	Explosive Magazine & Emulsion Plant Appv'd
C1/C2 - Preparation Works for Temp. Conveyor Sys		
	23/MAR/07A	Tree Felling for Temp Conveyor System
	02/APR/07A	Temporary Haul Road for Temp. Conveyor System
	26/APR/07A	Temp. Conveyor System Foundation Construction
	02/JUN/07	Conveyor & Barging Point Erection
	08/AUG/07	Conveyor Commissioning
		Completion of Conveyor & Barging Point
C1 / C2 / C5 - Summit Excavation		
	19/MAR/07A	Form Access for Summit Site Formation (South)
	05/JUN/07	Form Access for Summit Site Formation (North)
	11/JUL/07	Trial Blasting-Summit Terminus Area (North Part)
	11/JUL/07	Trial Blasting-Summit Terminus Area (South Part)
	11/JUL/07	Form Temp Access Roads within Ph 1 & 2
	11/JUL/07	Soft Excavation (50,000cu.m.)
	29/AUG/07	Rock Blasting Phase 1 (328,000cu.m.)
	29/AUG/07	Ph. 1 Blast top to +178mPD+South+SE end+131mPD
Cost Centre D - Funicular Tunnel and Adit Tunnel		
Construction		
D3 - Adit (Ch.935)		
	16/MAR/07A	Site Formation for Adit Portal
	06/JUL/07	Adit Tunnel Excavation with Temp. Works
D1 - Tunnel Ch.940 - Ch.1240		
	16/AUG/07	Excavation - 36 li.m./wk
D2 - Tunnel Ch. 0 - Ch.940		
	16/AUG/07	Excavation CH940 towards CH740 - 24 li.m./wk
	29/AUG/07	Forepoling for Soft Ground Tunnel from Ch21
Cost Centr E-Funicular Termini-Summit&Waterfront		
Construction		
E1 - South Part of Waterfront Terminus		
	27/APR/07A	Pipe pile & Cut-off Wall Installation
	28/MAY/07	Pressure Grout below building & above portal
	06/JUN/07	BA14
	06/JUN/07	Consent for Commencement of Works from BD
	14/JUN/07	Pumping test
	27/JUN/07	Prep. & sub'm of pumping test report to BD & PM
	19/JUL/07	1st Stage-Waling&Strut with Soil Nail&Excavation
E1 - North Part of Waterfront Terminus		
	03/JUL/07	Pipe Pile & Cut-off Wall Installation
	26/AUG/07	Consent for Commencement of Works from BD
	27/AUG/07	Minipiles Installation
	27/AUG/07	Pumping test
Nam Long Shan & Wong Chuk Hang Drainage Works		
	06/JUN/07	As-built Drawings Preparation
Cost Centre G - Project Offices		
Construction		
G1 - PMR Project Office(HK School of Motoring)		
	20/APR/07A	Project Office Superstructure & Move In(PMI 18)
Start Date	02/OCT/06	OP3A
Finish Date	14/MAR/09	
Data Date	28/MAY/07	
Run Date	26/MAY/07 17:19	
Dragages - Bouygues JV		Sheet 1 of 2
Ocean Park Master Redevelopment Project		
Contract CI05		
Preliminary Construction Programme Rev 2		
ENVIRONMENTAL DEPARTMENT		
3 Month Rolling Forecast		
Date	Revision	Checked/Approved

	Early Start	Activity Description
G2 - Waterfront Project Office		
	30/APR/07A	Project Office Superstructure & Move In
Cost Centre H-Option Government Entrust Works		
Construction		
H3 - Wong Chuk Hang Road		
	26/JUN/07	Drainage& Road:Manhole F2.08-F2.07 (7.0md,115ml)
	26/JUN/07*	F2.08 to F2.07 (Q1)
	13/AUG/07	Drainage& Road:Manhole F2.07-F2.06 (6.0md,96ml)
	13/AUG/07	F2.07 to F2.06 (Q2)
H2 - Nam Long Shan Road		
	11/MAY/07A	Existing MH to F1.73 (P1)
	11/MAY/07A	Drainage Works:Manhole F1.70 to Connect w Road
	12/MAY/07A	F1.67 to F1.66 (P9)
	28/MAY/07*	F1.35 to F1.34 (P40-stage 1)
	28/MAY/07	F1.50 to F1.49 (P27) include Watermain works
	21/JUN/07	F1.66 to F1.65 (P10)
	25/JUN/07	F1.73 to F1.72 (P2)
	26/JUN/07	F1.49 to F1.46 (P28) include Watermain works
	20/JUL/07	F1.56 to F1.54 (P23) include Watermain works
	26/JUL/07	Drainage Works:Manhole F1.46-F1.60 w Roadworks
	26/JUL/07	F1.46 to 15m (P29)
	26/JUL/07	Drainage Works:Manhole F1.44-F1.46 w Roadworks
	27/JUL/07	F1.63 to F1.62 (P15)
	04/AUG/07	F1.41 to F1.40 (P35)
	04/AUG/07	Drainage Works:Manhole F1.39-F1.41 w Roadworks
	04/AUG/07	Drainage Works:Manhole F1.41-F1.43 w Roadworks
	22/AUG/07	13m to F1.45 (P30)
	23/AUG/07	F1.54 to F1.52 (P24) include Watermain works
	24/AUG/07	F1.62 to F1.61 (P16)
	31/AUG/07	F1.40 to F1.39 (P36)
Other Works		
		Complete HyD Shun Wan Rd junction work by others
Cost Centre J - Entry Plaza Advance Works		
Construction		
Bus Depot (Portion 1)		
	05/MAY/07A	Procure DN200 & DN150 pipes
	06/JUN/07*	Driving sheet pile for 1800 drainage
	30/JUN/07	BA8
	30/JUN/07	BA14
	28/JUL/07	BA10
	04/AUG/07	Waling +strutting
	11/AUG/07	Excavation
	25/AUG/07	Manhole for 1800 drainage, 3nos.
Existing Bus Terminus (Portion 2)		
	05/MAY/07A	TTA for temp Ocean Park Road
	02/AUG/07	temp. road to police school
	02/AUG/07	Driving sheet pile for 1800 drainage section 3&4
	23/AUG/07	Diversion of ocean park road to temp. road
	24/AUG/07	Driving of sheet pile for drainage works sec. 2
HK School of Motoring (Portion 3)		
	30/APR/07A	1650 pipe laying, 130m
	03/MAY/07A	Manhole for 1650 drainage, 3 nos
	05/MAY/07A	Excavation for DN300 & DN450
	08/MAY/07A	Sheet Pile&Excav DN450,DN300,DN200,DN1650 & 11kv
	12/MAY/07A	DN450 pipe laying + concrete block, 180m
	14/MAY/07A	DN300 pipe laying + concrete block, 130m
	16/MAY/07A	Driving sheet pile 20m, 100nos, 14nos/day ~ 8
	28/MAY/07*	Temporary Bus Terminus construction
	28/MAY/07*	Additional fence
	29/MAY/07	Excavation 500mm below waling
	29/MAY/07	Waling & Strutting, 4m spacing, 6nos.
	30/MAY/07	Excavation, app 180m3
	31/MAY/07	Manhole for 1650 drainage, 1 nos.
	02/JUN/07	1650 pipe laying
	07/JUN/07	Extract sheet piling
	08/JUN/07	Upgrade existing Utility up to carriageway req.
	13/JUN/07	Additional 150 washout & chamber
	14/JUN/07	DN450, 300, 200, 1650 & 11kv pipe laying
	14/JUN/07	Add'l entry for early handover area of carpark
	25/JUN/07	Drainage for permanent road
	06/JUL/07	Permanent Road and Curing
	27/JUL/07	Upgrade existing Utility up to carriageway req.
	02/AUG/07	DN450, 300, 200, 1650 & 11kv pipe laying
	11/AUG/07	Drainage for permanent road
	22/AUG/07	Permanent Road and Curing
Cost Centre K - Panda Habitat Additional Works		
Construction		
Demolition of Existing Plant Room		
	28/MAY/07	backfilling for on-grade staircase
	31/MAY/07	Construct the staircase flight and landing
	08/JUN/07	Parapet wall construction and formwork removal
	13/JUN/07	dismantle external wall form
	15/JUN/07	Staircase fitting out(artificial granite tile)
Access Ramp		
	28/MAY/07	Paving
	05/JUN/07	Access Ramp finish
	09/JUN/07	Install Railing and balustrade
Emergency Vehicle Access Road(EVA)		
	02/APR/07A	Construct EVA Wing Hing to toilet
	14/MAY/07A	Construct EVA Toilet to Go-cart

APPENDIX J – CONTACTS OF KEY ENVIRONMENTAL PERSONNEL

Company	Contact Person	Position	Telephone No.
Ocean Park Corporation	Helen LEUNG	Project Manager	2873 8754
Maunsell Consultants Asia Ltd	Joseph GABAY	Project Manager Representative (PMR)	2552 1675
	Terence KONG	Project ETL	2552 1209
Dragages-Bouygues J.V.	YT SO	Project QSE Manager	2552 4110
	Schroeder TAM	Project QSE Officer	2552 4113
Mott MacDonald Hong Kong Ltd	Dr. Anne KERR	Independent Environmental Checker	2828 5757
ETS-Testconsult Limited	CL LAU	Environmental. Monitoring Team Supervisor	2695 8318

Part 3 CS-01 EM&A REPORTS (May 2007)

TABLE OF CONTENTS

	Page
EXECUTIVE SUMMARY	I
1. INTRODUCTION	1
Background	1
Project Organisation	1
Construction Works undertaken during the Reporting Month.....	1
Summary of EM&A Requirements	1
2. ENVIRONMENTAL audit	2
Site Inspection	2
Implementation Status of Environmental Mitigation Measures	2
Implementation Status of Environmental Complaint Handling Procedures	3
3. FUTURE KEY ISSUES.....	4
Key Issues for the Coming Month.....	4
Construction Program for the Next 3 Months	4
4. CONCLUSIONS AND RECOMMENDATIONS.....	5
Conclusions	5
Recommendations	5

List of Tables

Table 1.1	Actual Quantity of Waste Generated in May 2007.....	1
Table 2.1	Summary of Environmental Licensing and Permit Status.....	2

List of Appendices

Appendix A	Project Organization
Appendix B	Layout of Work Site
Appendix C	Construction Programme
Appendix D	Summary of Environmental Mitigation Implementation Schedule

EXECUTIVE SUMMARY

This is the 2nd EM&A Monthly report prepared by Kaden – ATAL Joint Venture for the Project “Vet Hospital”. This report presents the results of EM&A works conducted in the month of May 2007.

In the reporting month, the following construction activities took place:

- Excavation for footings;
- Disposal of excavated material;
- Construction of temporary drainage system
- Tower crane erection
- Site access road formation
- Site formation for plant block, pool block and office block

Environmental Licensing and Permitting

Permits granted to the Project include the Environmental Permit for the Project and construction noise permit. Information of these permits is provided in Table 2.1.

Implementation Status of Environmental Mitigation Measures

Dust generated by plant movement was observed. KAJV was reminded to keep watering the haul road and working area surfaces once the surfaces are dry.

Environmental Non-conformance

No complaint, summons or prosecution related to environmental issues was made against the Vet Hospital Project in the reporting month.

Future Key Issues

Key issues to be considered in the coming month include:

- General chemical waste management on site, in particular at site workshop.
- Construction waste management at temporary construction waste area.
- To implement dust suppression measures on dry surfaces.
- To keep well maintenance to equipment to avoid black smoke emission from machinery and vessels.
- Provision of treatment to turbid water (control the SS level) from activities on-site before discharge.

1. INTRODUCTION

Background

- 1.1 Under the requirements of Environmental Permit EP-249/2006/A, EM&A programme as set out in the EM&A Manual is required to be implemented.
- 1.2 This report summarises the environmental monitoring and audit works for the Project in May 2007.

Project Organisation

- 1.3 The structure of the Project Organisation is shown in Appendix A.

Construction Works undertaken during the Reporting Month

- 1.4 The major construction activities undertaken in May 2007 included disposal of excavated material, excavation for footing, and the construction of temporary drainage system, tower crane erection, site access road formation and site formation for plant block, pool block & office block.
- 1.5 A layout plan of the Project is provided in Appendix B.
- 1.6 The total volume of excavated material disposal at TKO Area 137 is 24.78 tonnes and Quarry Bay is 1949.21 tonnes. The actual amounts of different types of waste generated by the activities of the Project in the month are shown in Table 1.1.

Table 1.1 Actual Quantity of Waste Generated in May 2007

Waste Type	Examples	Actual quantity disposed	Disposal Locations
Excavated material	Rock and soil	1949.21 tonnes	Quarry Bay
Excavated material	Rock and soil	24.78 tonnes	TKO Area 137
C&D Waste	Plastic, wood and bamboo	10.01 tonnes	SENT Landfill
Chemical waste	Used oil, spent solvent	0	Collected by licensed collector
General waste	Domestic waste (site) collected in garbage bins	0	SENT landfill

Summary of EM&A Requirements

- 1.7 The environmental licensing and permits are described in Section 2.
- 1.8 The advice on the implementation status of environmental protection and pollution control/mitigation measures is summarized in Section 2 of the Report.
- 1.9 The implementation status of the environmental mitigation is attached in Appendix D.

2. ENVIRONMENTAL AUDIT

Site Inspection

- 2.1 The contract commencement date is 26 Mar 07.
- 2.2 Since the major construction activities was not started until mid-April 2007, the weekly site inspection was only carried out on 2 May 07, 10 May 07, 17 May 07, 25 May 07 and 29 May 07 (IEC audit) within the reporting month.
- 2.3 The purpose is to monitor environmental issues on the construction sites to ensure that all mitigation measures were implemented timely and properly.

Status of Environmental Licensing and Permitting

- 2.4 All permits/licences obtained as of May 2007 are summarised in Table 2.1.

Table 2.1 Summary of Environmental Licensing and Permit Status

Table 21: Summary of Environmental Licensing and Permit Status				
Permit No.	Valid Period		Section	Status
	From	To		
Environmental Permit				
EP-249/2006/A	28/07/06	N/A	Expansion of existing Ocean Park and reconstruction / modification of its existing facilities.	Valid
Construction Noise Permits				
GW-RS0170-07	02/04/07	25/09/07	Generator, dump truck, tracked excavator, concrete pump, tower crane, poker, air compressor, concrete lorry mixer.	Cancelled
GW-RS0286-07	26/05/07	25/11/07	Generator, dump truck, tracked excavator, concrete pump, tower crane, poker, air compressor, concrete lorry mixer.	Valid
Chemical Waste Producer				
5213-199-K2880-01	19/03/07	N/A	-	Valid
Air Pollution Control (Construction Dust) Licence				
001018953	16/03/07	N/A		Valid
Water Discharge Licence				
Application was sent to EPD and was awaited for reply.				
Billing Account for Disposal of Construction Waste and Application for Issuance of Chits				
7005185	12/4/07	N/A	400 nos. of chit. Chits No. 02211750 to 02212149	Valid

Implementation Status of Environmental Mitigation Measures

- 2.5 During site inspections in this reporting month, the following observations and recommendations were made.

Water Quality Mitigation Measures

- 2.6 The temporary drainage system and the sedimentation facilities for controlling the SS level before discharge was installed on site.

Air Quality Mitigation Measures

- 2.7 Dust was observed generated from rock breaking activities. KAJV was reminded to provide water spray during dust generating activities.
- 2.8 Haul road was dry and dusty. KAJV was reminded to provide water spray to suppress dust.

Noise

- 2.9 No violation was observed during site inspections in the month. The noise barrier will be erected when the construction works are located near the visitors of the parks and the OPC staff.

Ecology

- 2.10 No violation was observed during site inspections in the month.

Waste / Chemical Management

- 2.11 No violation was observed during site inspections in the month.

Others

- 2.12 EP and CNP were displayed at site entrance.

Implementation Status of Environmental Complaint Handling Procedures

Summary of the Complaints and Prosecutions

- 2.13 No complaint, summons or prosecution related to environmental issues was received or made against the Project in May 2007.

3. FUTURE KEY ISSUES

Key Issues for the Coming Month

3.1 Key issues to be considered in the coming month include:

- Noise from operating equipment and machinery on-site.
- Loss of sediment from filling.
- General chemical waste management on site, in particular at site workshop.
- Avoid accumulation of stagnant / muddy water on-site.
- To implement dust suppression measures on dry surfaces.
- Accumulation of stocked shrubs was observed placed at the existing slope. Stocked shrubs should be removed regularly

Construction Program for the Next 3 Months

3.2 The construction programme for the next 3 months is shown in Appendix C.

4. CONCLUSIONS AND RECOMMENDATIONS

Conclusions

- 4.1 No complaint, summons or prosecution related to environmental issues were made against this project in the reporting period.
- 4.2 IEC audit was carried out on 29 May 07. 2 observations and 0 non-compliances were raised.
- 4.3 Five site inspections were carried out 2 May 07, 10 May 07, 17 May 07, 25 May 07 and 29 May 07 (IEC audit) within the reporting month.

Recommendations

- 4.4 According to the environmental audit performed in the reporting month, the following recommendations are made:

Air Quality Impact

- To implement dust suppression measures on dry surfaces.

Noise Impact

- To inspect the noise sources from inside and outside of the site.
- To space out noisy equipment and position as far away as possible from sensitive receivers.
- To have regular maintenance of vehicles and equipment used.

Water Quality Impact

- To ensure open stockpiles of construction materials are covered with tarpaulin or similar fabric during rainstorm.
- To fully operate the temporary on-site drainage system and all sedimentation tank and WetSep.


Waste/Chemical Management

- To check for any accumulation of waste materials or rubbish on site.
- To avoid any discharge of chemical waste or oil directly from the site.
- To regularly and properly collect, store and dispose of all waste types.

Appendix A



OCEAN PARK MASTER REDEVELOPMENT PROJECT
CONTRACT NO. CS01 - VET HOSPITAL
KADEN - ATAI JOINT VENTURE
PROJECT ORGANIZATION CHART

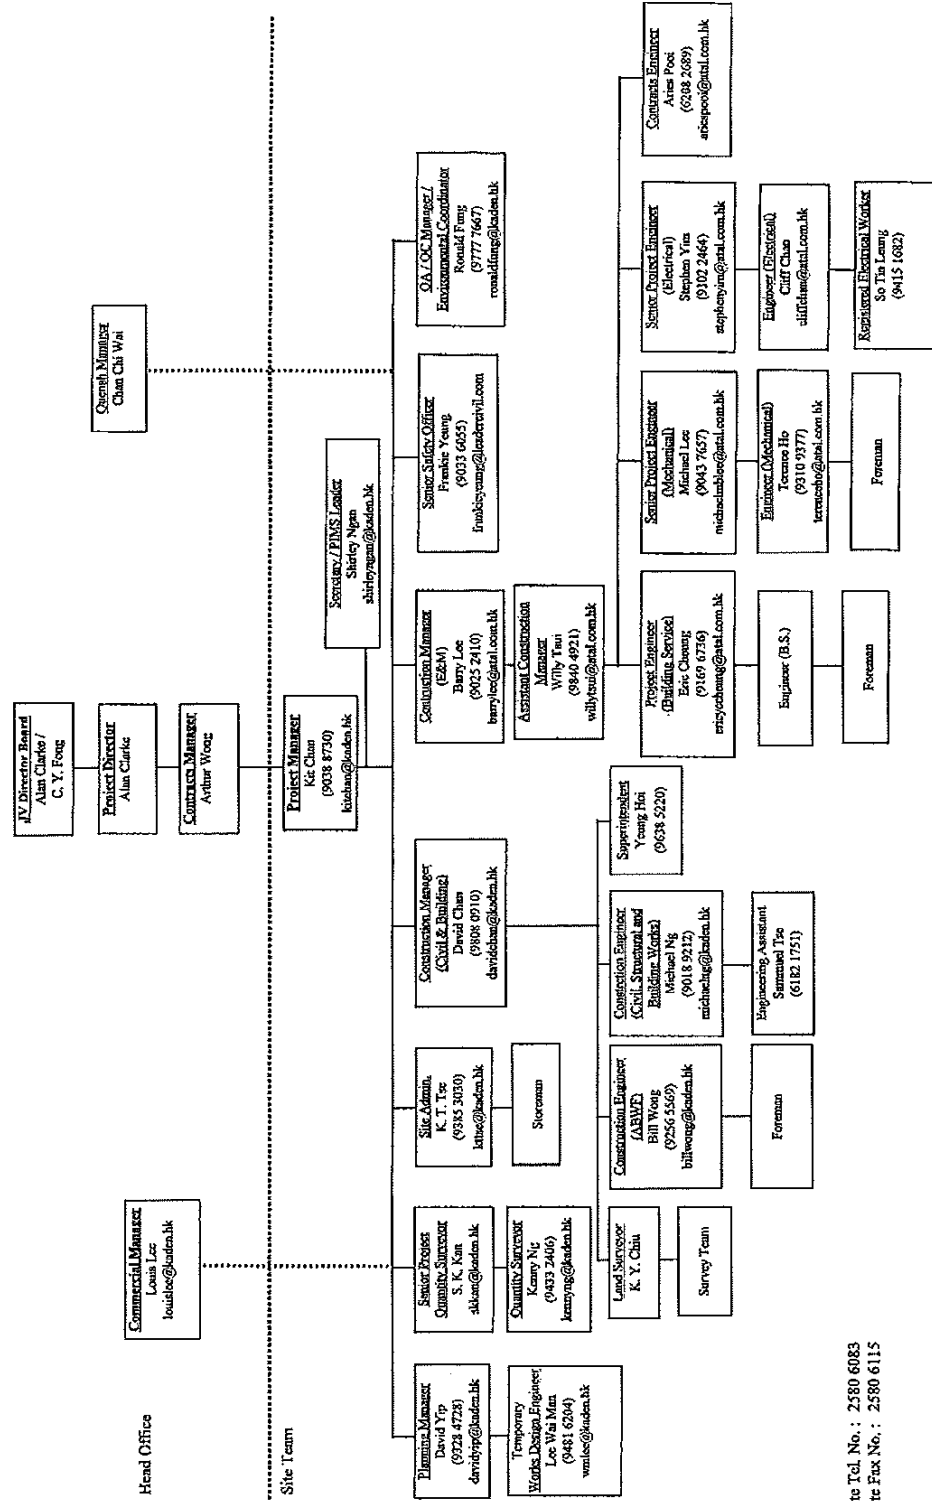


Site Tel. No.: 2380 6083
Site Fax No.: 2580 6115

(updated on 28 March 2007)

Appendix B

NOTE:

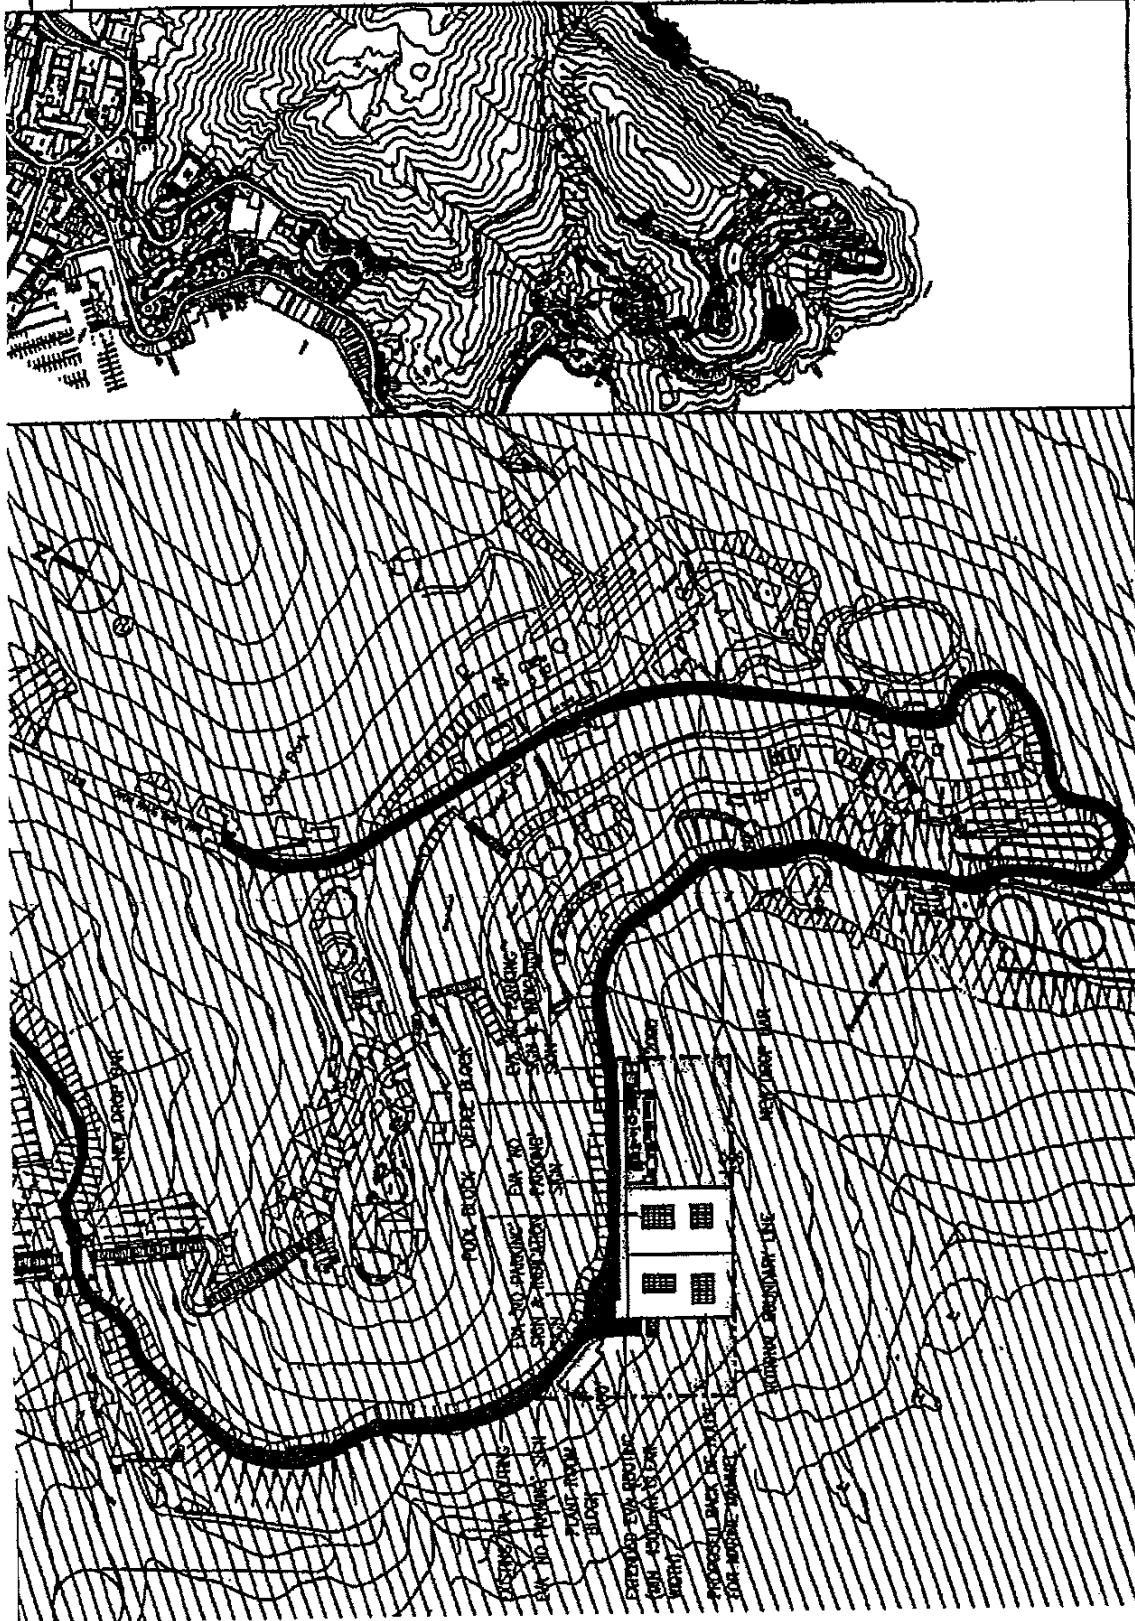

SCALE 1:2000	SITE LOCATION PLAN SCALE 1:5000
--------------	---------------------------------

A	22/08/08	Reader Attendants 1
-	22/08/08	Reader Booking
REV.	DATE	DESCRIPTION

REVISION ISSUE

LEGENDS (FOR ALL BLOCK)

Appendix C

Activity ID	Orig. ID	Early Start	Finish	Trade	Month	Year
General						
Garvey Construction Company Inc						
VHCD01	0	26-03-2007		0		
VHCD08	0		26-04-2008	0		
Activity Dates						
VHJAD01	0	26-03-2007		0		
VHJAD10	0	15-05-2007		0		
Key Dates						
VHJCD01	0		26-04-2008	0		
VHJCD02	0		16-07-2007	0		
VHJCD03	0		05-09-2008	0		
VHJCD04	0		16-09-2008	0		
VHJCD06	0		26-04-2008	0		
Preliminary Dates						
Schedule of Milestones						
VHKA01	0		31-03-2007	0		
VHKA02	0		30-04-2007	0		
VHKA03	0		31-05-2007	0		
VHKA04	0		30-06-2007	0		
VHKA05	0		31-07-2007	0		
VHKA06	0		30-08-2007	0		
VHKA07	0		31-10-2007	0		
VHKA08	0		30-11-2007	0		
VHKA09	0		31-12-2007	0		

Sheet 1 of 14
 KAUDEN - ATAL JOINT VENTURE
 Cowen Park Medical Redevelopment
 Contract No. CS01 - Vet Hospital
 Construction Programme

26-03-2007
 27-07-2008
 26-09-2007
 27-04-2007 15:18
 Project Start
 Project End
 Client Activity

26-03-2007
 27-07-2008
 26-09-2007
 27-04-2007 15:18
 Project Start
 Project End
 Client Activity

26-03-2007
 27-07-2008
 26-09-2007
 27-04-2007 15:18
 Project Start
 Project End
 Client Activity

26-03-2007
 27-07-2008
 26-09-2007
 27-04-2007 15:18
 Project Start
 Project End
 Client Activity

26-03-2007
 27-07-2008
 26-09-2007
 27-04-2007 15:18
 Project Start
 Project End
 Client Activity

26-03-2007
 27-07-2008
 26-09-2007
 27-04-2007 15:18
 Project Start
 Project End
 Client Activity

26-03-2007
 27-07-2008
 26-09-2007
 27-04-2007 15:18
 Project Start
 Project End
 Client Activity

26-03-2007
 27-07-2008
 26-09-2007
 27-04-2007 15:18
 Project Start
 Project End
 Client Activity

26-03-2007
 27-07-2008
 26-09-2007
 27-04-2007 15:18
 Project Start
 Project End
 Client Activity

26-03-2007
 27-07-2008
 26-09-2007
 27-04-2007 15:18
 Project Start
 Project End
 Client Activity

26-03-2007
 27-07-2008
 26-09-2007
 27-04-2007 15:18
 Project Start
 Project End
 Client Activity

26-03-2007
 27-07-2008
 26-09-2007
 27-04-2007 15:18
 Project Start
 Project End
 Client Activity

26-03-2007
 27-07-2008
 26-09-2007
 27-04-2007 15:18
 Project Start
 Project End
 Client Activity

26-03-2007
 27-07-2008
 26-09-2007
 27-04-2007 15:18
 Project Start
 Project End
 Client Activity

26-03-2007
 27-07-2008
 26-09-2007
 27-04-2007 15:18
 Project Start
 Project End
 Client Activity

26-03-2007
 27-07-2008
 26-09-2007
 27-04-2007 15:18
 Project Start
 Project End
 Client Activity

26-03-2007
 27-07-2008
 26-09-2007
 27-04-2007 15:18
 Project Start
 Project End
 Client Activity

26-03-2007
 27-07-2008
 26-09-2007
 27-04-2007 15:18
 Project Start
 Project End
 Client Activity

26-03-2007
 27-07-2008
 26-09-2007
 27-04-2007 15:18
 Project Start
 Project End
 Client Activity

26-03-2007
 27-07-2008
 26-09-2007
 27-04-2007 15:18
 Project Start
 Project End
 Client Activity

26-03-2007
 27-07-2008
 26-09-2007
 27-04-2007 15:18
 Project Start
 Project End
 Client Activity

26-03-2007
 27-07-2008
 26-09-2007
 27-04-2007 15:18
 Project Start
 Project End
 Client Activity

26-03-2007
 27-07-2008
 26-09-2007
 27-04-2007 15:18
 Project Start
 Project End
 Client Activity

26-03-2007
 27-07-2008
 26-09-2007
 27-04-2007 15:18
 Project Start
 Project End
 Client Activity

Code	QTY	Unit	Start Date	End Date	Remarks	Notes
VHKA10	0		31-01-2008	0		
VHKA11	0		23-02-2008	0		
VHKA12	0		31-03-2008	0		
VHKA13	0		30-04-2008	0		
Safety Management						
VHTPSM01	0		31-03-2007	0	Site Safety Supervision Plan	
VHTPSM02	0		23-04-2007	0	Submit Safety Plan	
VHTPSM03	0		18-04-2007	0	Submit Risk Assessment of the Works	
Quality Management						
VHTQM01	0		23-04-2007	0	Submit Quality Plan	
VHTQM02	0		31-05-2007	0	Submit Site Supervision Plan	
Environmental Management						
VHTPEM01	0		06-04-2007	0	Submit Waste Management Plan	
VHTPEM02	0		06-04-2007	0	Submit Environmental Risk Assessment Report	
VHTPEM03	0		02-04-2007	0	Apply for Construction Noise Permit	
VHTPEM04	0		02-04-2007	0	Apply for Water Discharge License	
VHTPEM05	0		23-04-2007	0	Submit Contractor Environmental Management Plan	
Other						
VHPPSS05	0		26-03-2007	0	Obtain 2D approval on the commencement of Works	
VHPPSS10	0		30-04-2007	0	Submit Form WH048 (Part 1 & 2) to WSD	
VHPPSS12	0		30-04-2007	0	Submission of FSI 314 Stage 1 to FSD	
VHPPSS13	0		01-06-2007	0	Application to EPC for approval of installation of exhaust pipe for emergency generator	
VHPPSS15	0		30-06-2007	0	Submission of Form 425 to FSD (Before commencement of MVAC installation)	
VHPPSS20	0		04-07-2007	0	Apply for electricity meter from HK Electric Co.	
VHPPSS25	0		01-09-2007	0	Submission of Form 24 to EMED (Before commencement of IIR installation)	
VHPPSS30	0		01-11-2007	0	Submission of WPI to HEC for energisation	
VHPPSS40	0		06-02-2008	39	Submit Form WH048 (Part 4) & WH0122 to WSD	
VHPPSS50	0		06-03-2008	39	Issue Water Certificate by WSD	
VHPPSS70	0		10-03-2008	0	Submission of Form 501 to FSD	
VHPPSS71	1		24-03-2008	0	Let inspection of PS installation by FSD	
VHPPSS72	14		25-03-2008	07-04-2008	Rectify defects as per FSD's comment	

Activity	Qty	Start Date	End Date	Remarks
WHITE0010	35	26-03-2007	30-04-2007	0
WHITE0020	60	26-03-2007	24-05-2007	0
WHITE0030	36	26-03-2007	30-04-2007	0
WHITE0040	80	26-03-2007	24-05-2007	0
WHITE0050	36	26-03-2007	30-04-2007	0
WHITE0060	67	26-03-2007	31-05-2007	0
WHITE0070	33	01-05-2007	07-06-2007	0
WHITE0080	31	16-05-2007	14-06-2007	0
WHITE0090	7	16-05-2007	21-06-2007	0
WHITE0100	30	22-06-2007	19-09-2007	0
WHITE0110	120	22-06-2007	19-10-2007	0
WHITE0120	90	22-06-2007	19-09-2007	0
WHITE0130	90	22-06-2007	19-09-2007	0
WHITE0140	120	22-06-2007	19-10-2007	12
WHITE0150	120	22-06-2007	19-10-2007	0
WHITE0160	3	13-06-2007	19-06-2007	39
WHITE0170	3	12-06-2007	14-06-2007	35
WHITE0180	3	12-06-2007	14-06-2007	66
WHITE0190	3	13-06-2007	16-06-2007	39
WHITE0140	3	13-06-2007	16-06-2007	39
WHITE0150	7	08-09-2007	14-09-2007	13
Site Establishment Works				
WHITE0170	28	26-03-2007	22-04-2007	30
WHITE0180	5	26-03-2007	30-03-2007	36
WHITE0190	6	26-03-2007	02-04-2007	0
WHITE0140	10	26-03-2007	09-04-2007	6
WHITE0150	5	26-03-2007	30-03-2007	13

Activity	Qty	Start Date	End Date	Remarks
WHITE0210	30	22-06-2007	19-09-2007	0
WHITE0220	120	22-06-2007	19-10-2007	0
WHITE0230	90	22-06-2007	19-09-2007	0
WHITE0240	90	22-06-2007	19-09-2007	0
WHITE0250	120	22-06-2007	19-10-2007	12
WHITE0260	120	22-06-2007	19-10-2007	0
WHITE0270	3	13-06-2007	19-06-2007	39
WHITE0280	3	12-06-2007	14-06-2007	35
WHITE0290	3	12-06-2007	14-06-2007	66
WHITE0300	3	13-06-2007	16-06-2007	39
WHITE0310	3	13-06-2007	16-06-2007	39
WHITE0320	7	08-09-2007	14-09-2007	13
Site Establishment Works				
WHITE0340	28	26-03-2007	22-04-2007	30
WHITE0350	5	26-03-2007	30-03-2007	36
WHITE0360	6	26-03-2007	02-04-2007	0
WHITE0370	10	26-03-2007	09-04-2007	6
WHITE0380	5	26-03-2007	30-03-2007	13

Activity	Qty	Start Date	End Date	Remarks
WHITE0390	30	22-06-2007	19-09-2007	0
WHITE0400	120	22-06-2007	19-10-2007	0
WHITE0410	90	22-06-2007	19-09-2007	0
WHITE0420	90	22-06-2007	19-09-2007	0
WHITE0430	120	22-06-2007	19-10-2007	12
WHITE0440	120	22-06-2007	19-10-2007	0
WHITE0450	3	13-06-2007	19-06-2007	39
WHITE0460	3	12-06-2007	14-06-2007	35
WHITE0470	3	12-06-2007	14-06-2007	66
WHITE0480	3	13-06-2007	16-06-2007	39
WHITE0490	3	13-06-2007	16-06-2007	39
WHITE0500	7	08-09-2007	14-09-2007	13
Site Establishment Works				
WHITE0520	28	26-03-2007	22-04-2007	30
WHITE0530	5	26-03-2007	30-03-2007	36
WHITE0540	6	26-03-2007	02-04-2007	0
WHITE0550	10	26-03-2007	09-04-2007	6
WHITE0560	5	26-03-2007	30-03-2007	13

Activity	Qty	Start Date	End Date	Remarks
WHITE0570	30	22-06-2007	19-09-2007	0
WHITE0580	120	22-06-2007	19-10-2007	0
WHITE0590	90	22-06-2007	19-09-2007	0
WHITE0600	90	22-06-2007	19-09-2007	0
WHITE0610	120	22-06-2007	19-10-2007	12
WHITE0620	120	22-06-2007	19-10-2007	0
WHITE0630	3	13-06-2007	19-06-2007	39
WHITE0640	3	12-06-2007	14-06-2007	35
WHITE0650	3	12-06-2007	14-06-2007	66
WHITE0660	3	13-06-2007	16-06-2007	39
WHITE0670	3	13-06-2007	16-06-2007	39
WHITE0680	7	08-09-2007	14-09-2007	13
Site Establishment Works				
WHITE0700	28	26-03-2007	22-04-2007	30
WHITE0710	5	26-03-2007	30-03-2007	36
WHITE0720	6	26-03-2007	02-04-2007	0
WHITE0730	10	26-03-2007	09-04-2007	6
WHITE0740	5	26-03-2007	30-03-2007	13

Activity	Qty	Start Date	End Date	Remarks
WHITE0750	30	22-06-2007	19-09-2007	0
WHITE0760	120	22-06-2007	19-10-2007	0
WHITE0770	90	22-06-2007	19-09-2007	0
WHITE0780	90	22-06-2007	19-09-2007	0
WHITE0790	120	22-06-2007	19-10-2007	12
WHITE0800	120	22-06-2007	19-10-2007	0
WHITE0810	3	13-06-2007	19-06-2007	39
WHITE0820	3	12-06-2007	14-06-2007	35
WHITE0830	3	12-06-2007	14-06-2007	66
WHITE0840	3	13-06-2007	16-06-2007	39
WHITE0850	3	13-06-2007	16-06-2007	39
WHITE0860	7	08-09-2007	14-09-2007	13
Site Establishment Works				
WHITE0880	28	26-03-2007	22-04-2007	30
WHITE0890	5	26-03-2007	30-03-2007	36
WHITE0900	6	26-03-2007	02-04-2007	0
WHITE0910	10	26-03-2007	09-04-2007	6
WHITE0920	5	26-03-2007	30-03-2007	13

Activity	Qty	Start Date	End Date	Remarks
WHITE0930	30	22-06-2007	19-09-2007	0
WHITE0940	120	22-06-2007	19-10-2007	0
WHITE0950	90	22-06-2007	19-09-2007	0
WHITE0960	90	22-06-2007	19-09-2007	0
WHITE0970	120	22-06-2007	19-10-2007	12
WHITE0980	120	22-06-2007	19-10-2007	0
WHITE0990	3	13-06-2007	19-06-2007	39
WHITE1000	3	12-06-2007	14-06-2007	35
WHITE1010	3	12-06-2007	14-06-2007	66
WHITE1020	3	13-06-2007	16-06-2007	39
WHITE1030	3	13-06-2007	16-06-2007	39
WHITE1040	7	08-09-2007	14-09-2007	13
Site Establishment Works				
WHITE1060	28	26-03-2007	22-04-2007	30
WHITE1070	5	26-03-2007	30-03-2007	36
WHITE1080	6	26-03-2007	02-04-2007	0
WHITE1090	10	26-03-2007	09-04-2007	6
WHITE1100	5	26-03-2007	30-03-2007	13

Activity	Qty	Start Date	End Date	Remarks
WHITE1110	30	22-06-2007	19-09-2007	0
WHITE1120	120	22-06-2007	19-10-2007	0
WHITE1130	90	22-06-2007	19-09-2007	0
WHITE1140	90	22-06-2007	19-09-2007	0
WHITE1150	120	22-06-2007	19-10-2007	12
WHITE1160	120	22-06-2007	19-10-2007	0
WHITE1170	3	13-06-2007	19-06-2007	39
WHITE1180	3	12-06-2007	14-06-2007	35
WHITE1190	3	12-06-2007	14-06-2007	66
WHITE1200	3	13-06-2007	16-06-2007	39
WHITE1210	3	13-06-2007	16-06-2007	39
WHITE1220	7	08-09-2007	14-09-2007	13
Site Establishment Works				
WHITE1240	28	26-03-2007	22-04-2007	30
WHITE1250	5	26-03-2007	30-03-2007	36
WHITE1260	6	26-03-2007	02-04-2007	0
WHITE1270	10	26-03-2007	09-04-2007	6
WHITE1280	5	26-03-2007	30-03-2007	13


Activity	Qty	Start Date	End Date	Remarks
WHITE1290	30	22-06-2007	19-09-2007	0
WHITE1300	120	22-06-2007	19-10-2007	0
WHITE1310	90	22-06-2007	19-09-2007	0
WHITE1320	90	22-06-2007	19-09-2007	0
WHITE1330	120	22-06-2007	19-10-2007	12
WHITE1340	120	22-06-2007	19-10-2007	0
WHITE1350	3	13-06-2007	19-06-2007	39
WHITE1360	3	12-06-2007	14-06-2007	35
WHITE1370	3	12-06-2007	14-06-2007	66
WHITE1380	3	13-06-2007	16-06-2007	39
WHITE1390	3	13-06-2007	16-06-2007	39
WHITE1400	7	08-09-2007	14-09-2007	13
Site Establishment Works				
WHITE1420	28	26-03-2007	22-04-2007	30
WHITE1430	5	26-03-2007	30-03-2007	36
WHITE1440	6	26-03-2007	02-04-2007	0
WHITE1450	10	26-03-2007	09-04-2007	6
WHITE1460	5	26-03-2007	30-03-2007	13

Activity	Qty	Start Date	End Date	Remarks
WHITE1470	30	22-06-2007	19-09-2007	0
WHITE1480	120	22-06-2007	19-10-2007	0
WHITE1490	90	22-06-2007	19-09-2007	0
WHITE1500	90	22-06-2007	19-09-2007	0
WHITE1510	120	22-06-2007	19-10-2007	12
WHITE1520	120	22-06-2007	19-10-2007	0
WHITE1530	3	13-06-2007	19-06-2007	39
WHITE1540	3	12-06-2007	14-06-2007	35
WHITE1550	3	12-06-2007	14-06-2007	66
WHITE1560	3	13-06-2007	16-06-2007	39
WHITE1570	3	13-06-2007	16-06-2007	39
WHITE1580	7	08-09-2007	14-09-2007	13
Site Establishment Works				
WHITE1600	28	26-03-2007	22-04-2007	30
WHITE1610	5	26-03-2007	30-03-2007	36
WHITE1620	6	26-03-2007	02-04-2007	0
WHITE1630	10	26-03-2007	09-04-2007	6
WHITE1640	5	26-03-2007	30-03-2007	13

Activity	Qty	Start Date	End Date	Remarks
WHITE1650	30	22-06-2007	19-09-2007	0
WHITE1660	120	22-06-2007	19-10-2007	0
WHITE1670	90	22-06-2007	19-09-2007	0
WHITE1680	90	22-06-2007	19-09-2007	0
WHITE1690	120	22-06-2007	19-10-2007	12
WHITE1700	120	22-06-2007	19-10-2007	0
WHITE1710	3	13-06-2007	19-06-2007	39
WHITE1720	3	12-06-2007	14-06-2007	35
WHITE1730	3	12-06-2007	14-06-2007	66
WHITE1740	3	13-06-2007	16-06-2007	39
WHITE1750	3	13-06-2007	16-06-2007	39
WHITE1760	7	08-09-2007	14-09-2007	13
Site Establishment Works				
WHITE1780	28	26-03-2007	22-04-2007	30
WHITE1790	5	26-03-2007	30-03-2007	36
WHITE1800	6	26-03-2007	02-04-2007	0
WHITE1810	10	26-03-2007	09-04-2007	6
WHITE1820	5	26-03-2007	30-03-2007	13

Activity	Qty	Start Date	End Date	Remarks
WHITE1830	30	22-06-2007	19-09-2007	0
WHITE1840	120	22-06-2007	19-10-2007	0
WHITE1850	90	22-06-2007	19-09-2007	0
WHITE1860	90	22-06-2007	19-09-2007	0
WHITE1870	120	22-06-2007	19-10-2007	12
WHITE1880	120	22-06-2007	19-10-2007	0
WHITE1890	3	13-06-2007	19-06-2007	39
WHITE1900	3	12-06-2007	14-06-2007	35
WHITE1910	3	12-06-2007	14-06-2007	66
WHITE1920	3	13-06-2007	16-06-2007	39
WHITE1930	3	13-06-2007	16-06-2007	39
WHITE1940	7	08-09-2007	14-09-2007	13
Site Establishment Works				
WHITE1960	28	26-03-2007	22-04-2007	30
WHITE1970	5	26-03-2007	30-03-2007	36
WHITE1980	6	26-03-2007	02-04-2007	0
WHITE1990	10	26-03-2007	09-04-2007	6
WHITE2000	5	26-03-2007	30-03-2007	13

Activity	Qty	Start Date	End Date	Remarks
WHITE2010	30	22-06-2007	19-09-2007	0
WHITE2020	120	22-06-2007	19-10-2007	0
WHITE2030	90	22-06-2007	19-09-2007	0
WHITE2040	90	22-06-2007	19-09-2007	0
WHITE2050	120	22-06-2007	19-10-2007	12
WHITE2060	120	22-06-2007	19-10-2007	0
WHITE2070	3	13-06-2007	19-06-2007	39
WHITE2080	3	12-06-2007	14-06-2007	35
WHITE2090	3	12-06-2007	14-06-2007	66
WHITE2100				

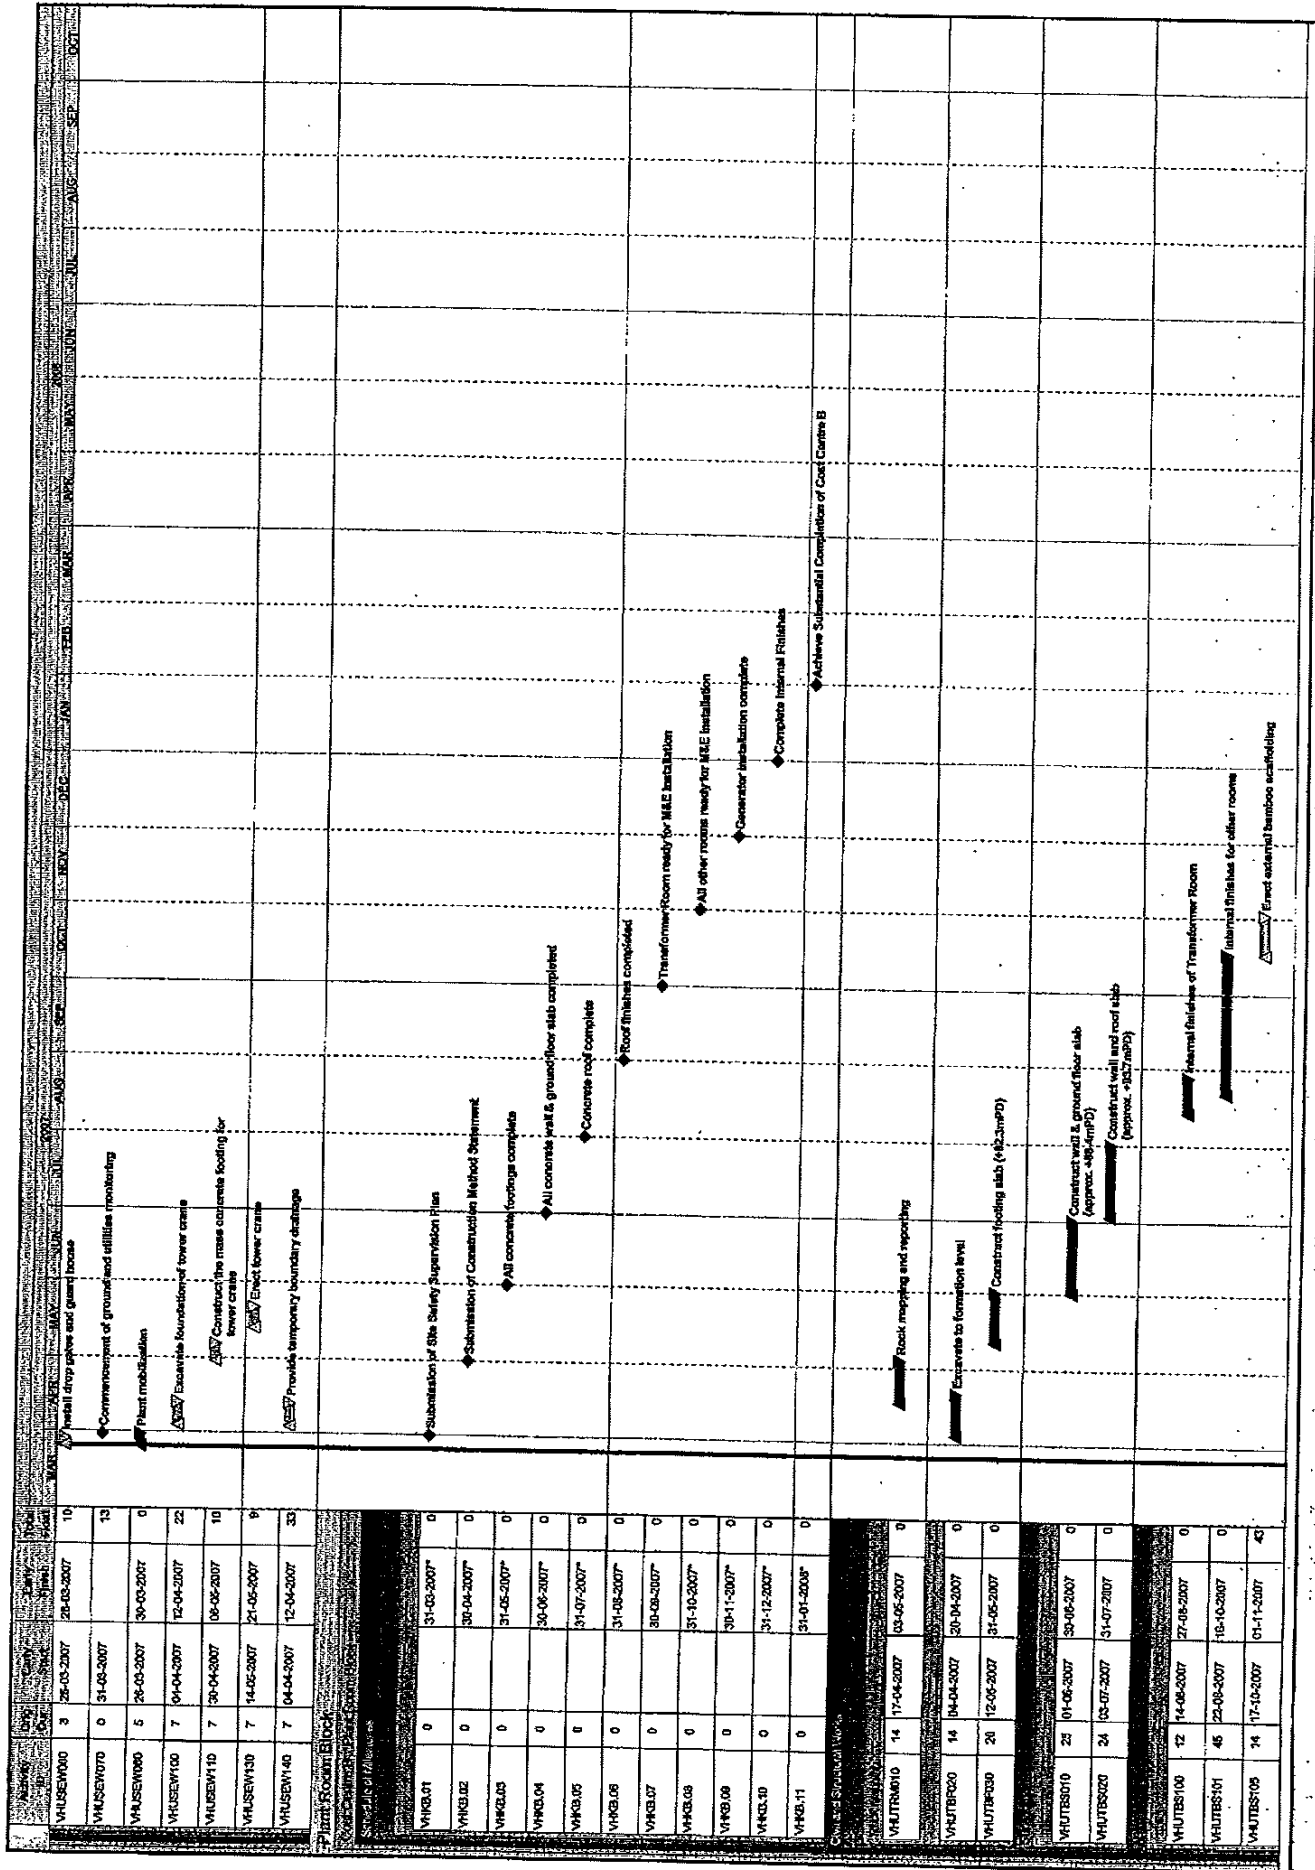

Activity	Start Date	End Date	Duration	Progress	Remarks
VAUTBES10	30	02-11-2007	06-12-2007	43	
VAUTBES20	14	08-03-2007	24-08-2007	0	
VAUTBES30	7	25-08-2007	31-08-2007	0	
Structure of Mainframe					
VAUC08	0	30-11-2007	30-11-2007	0	
VAUC10	0	31-12-2007	31-12-2007	0	
2nd Floor					
VAUTBES50	0	28-06-2007		0	
VAUTBES60	0	28-07-2007		0	
VAUTBES70	5	11-09-2007		0	
VAUTBES80	30	01-09-2007	30-09-2007	0	
VAUTBES90	0	01-10-2007		0	
VAUTBES95	45	01-10-2007	14-11-2007	0	
3rd Floor					
VAUTBES100	0	24-09-2007		0	
VAUTBES110	42	20-10-2007	30-11-2007	0	
VAUTBES120	68	24-09-2007	30-11-2007	0	
VAUTBES130	80	24-09-2007	27-12-2007	0	
4th Floor					
VAUTBES200	30	01-12-2007	30-12-2007	0	
VAUTBES210	1	31-12-2007	31-12-2007	0	
VAUTBES220	45	02-12-2007	15-01-2008	13	
VAUTBES230	32	28-12-2007	28-01-2008	0	
Pool Block					
VAUC01	0	31-03-2007	31-03-2007	0	
VAUC02	0	30-04-2007	30-04-2007	0	
VAUC03	0	31-05-2007	31-05-2007	0	
VAUC04	0	30-06-2007	30-06-2007	0	
VAUC05	0	31-07-2007	31-07-2007	0	


Activity	Due Date	Early Start	Early Finish	Job No.	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC
VHRC-06	0		31-08-2007	0												
VHRC-07	0		30-09-2007	0												
VHRC-08	0		31-10-2007	0												
VHRC-09	0		30-11-2007	0												
VHRC-10	0		31-12-2007	0												
VHRC-11	0		31-01-2008	0												
VHRC-12	0		29-02-2008	0												
VHRC-13	0		31-03-2008	0												
VHRC-14	0		30-04-2008	0												
Civil and Structural Works																
VHUEVA010	14	17-04-2007	03-06-2007	0												
VHUEVA020	14	04-05-2007	19-05-2007	0												
VHUEVA030	28	29-05-2007	30-06-2007	0												
VHUPBF20	14	08-06-2007	23-06-2007	0												
VHUPBF30	15	15-06-2007	31-06-2007	0												
VHUPBF40	15	07-06-2007	25-06-2007	0												
VHUPBF50	14	02-05-2007	17-05-2007	0												
VHUPBF60	15	10-05-2007	26-05-2007	0												
VHUPBF70	20	28-05-2007	20-06-2007	0												
VHUPBF80	9	21-06-2007	30-06-2007	0												
VHUPBF90	14	22-04-2007	09-05-2007	0												
VHUPBF100	16	09-05-2007	25-05-2007	0												
VHUPBF110	20	26-05-2007	19-06-2007	0												
VHUPBF120	9	21-06-2007	30-06-2007	0												
VHUPBF130	10	17-04-2007	27-04-2007	0												
VHUPBF140	10	10-05-2007	21-05-2007	0												
VHUPBF150	12	19-05-2007	01-06-2007	0												
VHUPBF160	10	11-04-2007	21-04-2007	0												
VHUPBF170	10	05-05-2007	16-05-2007	0												

Complete concrete work to Balance Tank																
Complete concrete work to Backwash Tank and LSS plant room slab																
Lower Grouted Floor ready for M&E Installation																
Complete concrete to pods and ground floor slab																
Complete steel roof fabrication																
Complete steel roof erection																
Complete all roof finishes																
All internal finishes complete																
Achieve Substantial Completion of Cost Centre C																

Cut slope benching for tailwork																
Erect falsework and formwork for EVA slab																
Construct EVA slab																
Excavate to footing formation level at Grid "P"																
Construct pad footing at Grid "P"																
Construct columns and bearing walls at Grid "P"																
Excavate to footing & screen wall formation level at Grid "Q"																
Construct pad footing at Grid "Q"																
Construct screen wall & columns at Grid "Q"																
Lay subsoil drain and mass concrete behind screen wall																
Excavate to footing & screen wall formation level at Grid "R"																
Construct pad footing at Grid "R"																
Construct screen wall & columns at Grid "R"																
Lay subsoil drain and mass concrete behind screen wall																
Excavate to footing formation level at Grid "S"																
Construct pad footing at Grid "S"																
Construct columns at Grid "S"																
Excavate to footing formation level at Grid "T"																
Construct pad footing at Grid "T"																

Activity ID	Orig. ID	Start Date	End Date	Task	Phase	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct
VHUPBR10	12	16-06-2007	26-06-2007	Construct columns at Grid "K" (1st Pour)																							
VHUPBR10	12	24-06-2007	06-08-2007	Construct columns at Grid "K" (2nd Pour)																							
VHUPBR10	10	04-04-2007	19-04-2007	Excavate to footing formation level at Grid "L"																							
VHUPBR10	10	26-04-2007	10-05-2007	Construct pad footing at Grid "L"																							
VHUPBR10	14	16-05-2007	30-05-2007	Construct columns at Grid "L" (1st Pour)																							
VHUPBR10	14	12-06-2007	26-06-2007	Construct columns at Grid "L" (2nd Pour)																							
VHUPBR10	14	17-04-2007	30-04-2007	Rock mapping and reporting for footing at Grid J to Grid L																							
VHUPBR10	14	10-06-2007	22-05-2007	Rock mapping and reporting for footing at Grid Q to Grid N																							
VHUPBR10	14	16-05-2007	29-05-2007	Rock mapping and reporting for footing at Grid F																							
VHUPBR10	10	31-05-2007	11-06-2007	Construct tie beams at Grid "K" & "L" (+72.2mPD)																							
VHUPBR10	10	06-06-2007	26-06-2007	Construct tie beams at Grid "K" & "L" (+72.2mPD)																							
VHUPBR10	4	07-06-2007	11-06-2007	Erect framework & formwork for Backwash Tank - base slab																							
VHUPBR10	6	12-06-2007	21-06-2007	Construct Backwash Tank - base slab (+72.2mPD)																							
VHUPBR10	14	25-06-2007	11-07-2007	Construct Backwash Tank - walls & columns																							
VHUPBR10	14	21-06-2007	07-07-2007	Erect blowwork & formwork for Lower QIF slabs																							
VHUPBR10	26	23-06-2007	02-08-2007	Construct Lower QIF slab (+72.2mPD)																							
VHUPBR10	26	23-07-2007	24-08-2007	Construct external wall to QIF																							
VHUPBR10	17	20-07-2007	09-08-2007	Construct Transfer, Break and Dugass Tank - wall and offset slab																							
VHUPBR10	14	30-07-2007	14-08-2007	Construct Dolphin Pool 1 and 2 - base slab																							
VHUPBR10	14	09-08-2007	24-08-2007	Construct Dolphin Pool 3 and 4 - base slab																							
VHUPBR10	14	21-08-2007	05-09-2007	Construct Holding Pool 3 & 2 and Quarantine Pool - base slab and Maintenance Platform Floor (+64.2mPD)																							
VHUPBR10	22	21-08-2007	15-09-2007	Construct Dolphin Pool 1 and 2 - wall																							
VHUPBR10	22	03-09-2007	29-09-2007	Construct Dolphin Pool 3 and 4 - wall																							
VHUPBR10	18	07-09-2007	29-09-2007	Construct Holding Pools & Quarantine Pool - wall																							
VHUPBR10	21	27-09-2007	17-10-2007	Construct Ground Floor - base slab (+67.4mPD)																							
VHUPBR10	24	13-10-2007	08-11-2007	Construct Ground Floor - walls & columns																							
VHUPBR10	14	19-10-2007	30-10-2007	Wateringhouse test to Backwash Tank																							
VHUPBR10	14	07-09-2007	20-09-2007	Wateringhouse test to Transfer Tank, Break Tank and Dugass Tank																							
VHUPBR10	14	07-11-2007	20-11-2007	Wateringhouse test to Dolphin, Holding Pools and Quarantine Pool																							

Activity ID	Start Date	End Date	Days	Weeks	Months	Years	Activity Description	Notes
VAUPBS300	0	14-09-2007	29-11-2007	13			1st delivery of structural steel roof segments	
VAUPBS310	0	28-10-2007		15			Connect up the structural roof truss segments on-site (by bolted connection method)	
VAUPBS320	30	10-11-2007	14-12-2007	0			Erect structural roof truss segments	
VAUPBS330	30	22-11-2007	27-12-2007	0			Erect temporary working platform under structural roof truss	
VAUPBS340	12	18-12-2007	03-01-2008	0			Apply fire-protect cementitious coating on structural steel truss	
VAUPBS350	21	04-01-2008	28-01-2008	0			Install roof cladding, skylights and full arrest system	
VAUPBS360	30	23-01-2008	28-02-2008	0				
VAUPBS370	10	19-09-2007	02-10-2007	46			Epoxy lining on internal face of Backwash Tank	
VAUPBS380	10	18-08-2007	27-08-2007	95			Epoxy lining on internal face of Transfer Tank, Break Tank and Degass Tank	
VAUPBS390	18	10-10-2007	27-10-2007	80			Epoxy lining on internal face of Dolphin Holding Pools and Quarantine Pool	
VAUPBS400	30	11-10-2007	14-11-2007	28			Internal finishes for Lower GF	
VAUPBS410	60	19-11-2007	20-01-2008	23			Internal finishes for Ground Floor	
VAUPBS420	16	18-11-2007	05-12-2007	58			Erect external barbs qualifying	
VAUPBS430	80	06-12-2007	18-02-2008	58			External finishes	
VAUPBS440	0	31-01-2008		0			Complete installation of Life Support System	
VAUPBS450	0	31-03-2008		0			Life Support Systems tested and commissioned and RT installation tested and commissioned	
VAUPBS460	0	28-09-2007		0			Starting handover of Lower GF for E&M Works (H1 Phase Handover)	
VAUPBS470	0	19-10-2007		0			Completely handover of Lower GF for E&M Works	
VAUPBS480	128	28-09-2007	31-01-2008	0			Install Life Support System	
VAUPBS490	90	20-10-2007	17-01-2008	36			Install electrical service system	
VAUPBS500	40	24-11-2007	02-01-2008	37			Install fire services system	
VAUPBS510	40	24-11-2007	02-01-2008	51			Install HVAC service system	
VAUPBS520	68	24-11-2007	31-01-2008	22			Install PLD service system	
VAUPBS530	0	10-01-2008		0			Handover of GF for E&M Works	
VAUPBS540	30	10-01-2008	08-02-2008	36			Install raised platform system & FPS water gate	
VAUPBS550	30	10-01-2008	08-02-2008	14			Install electrical service system	

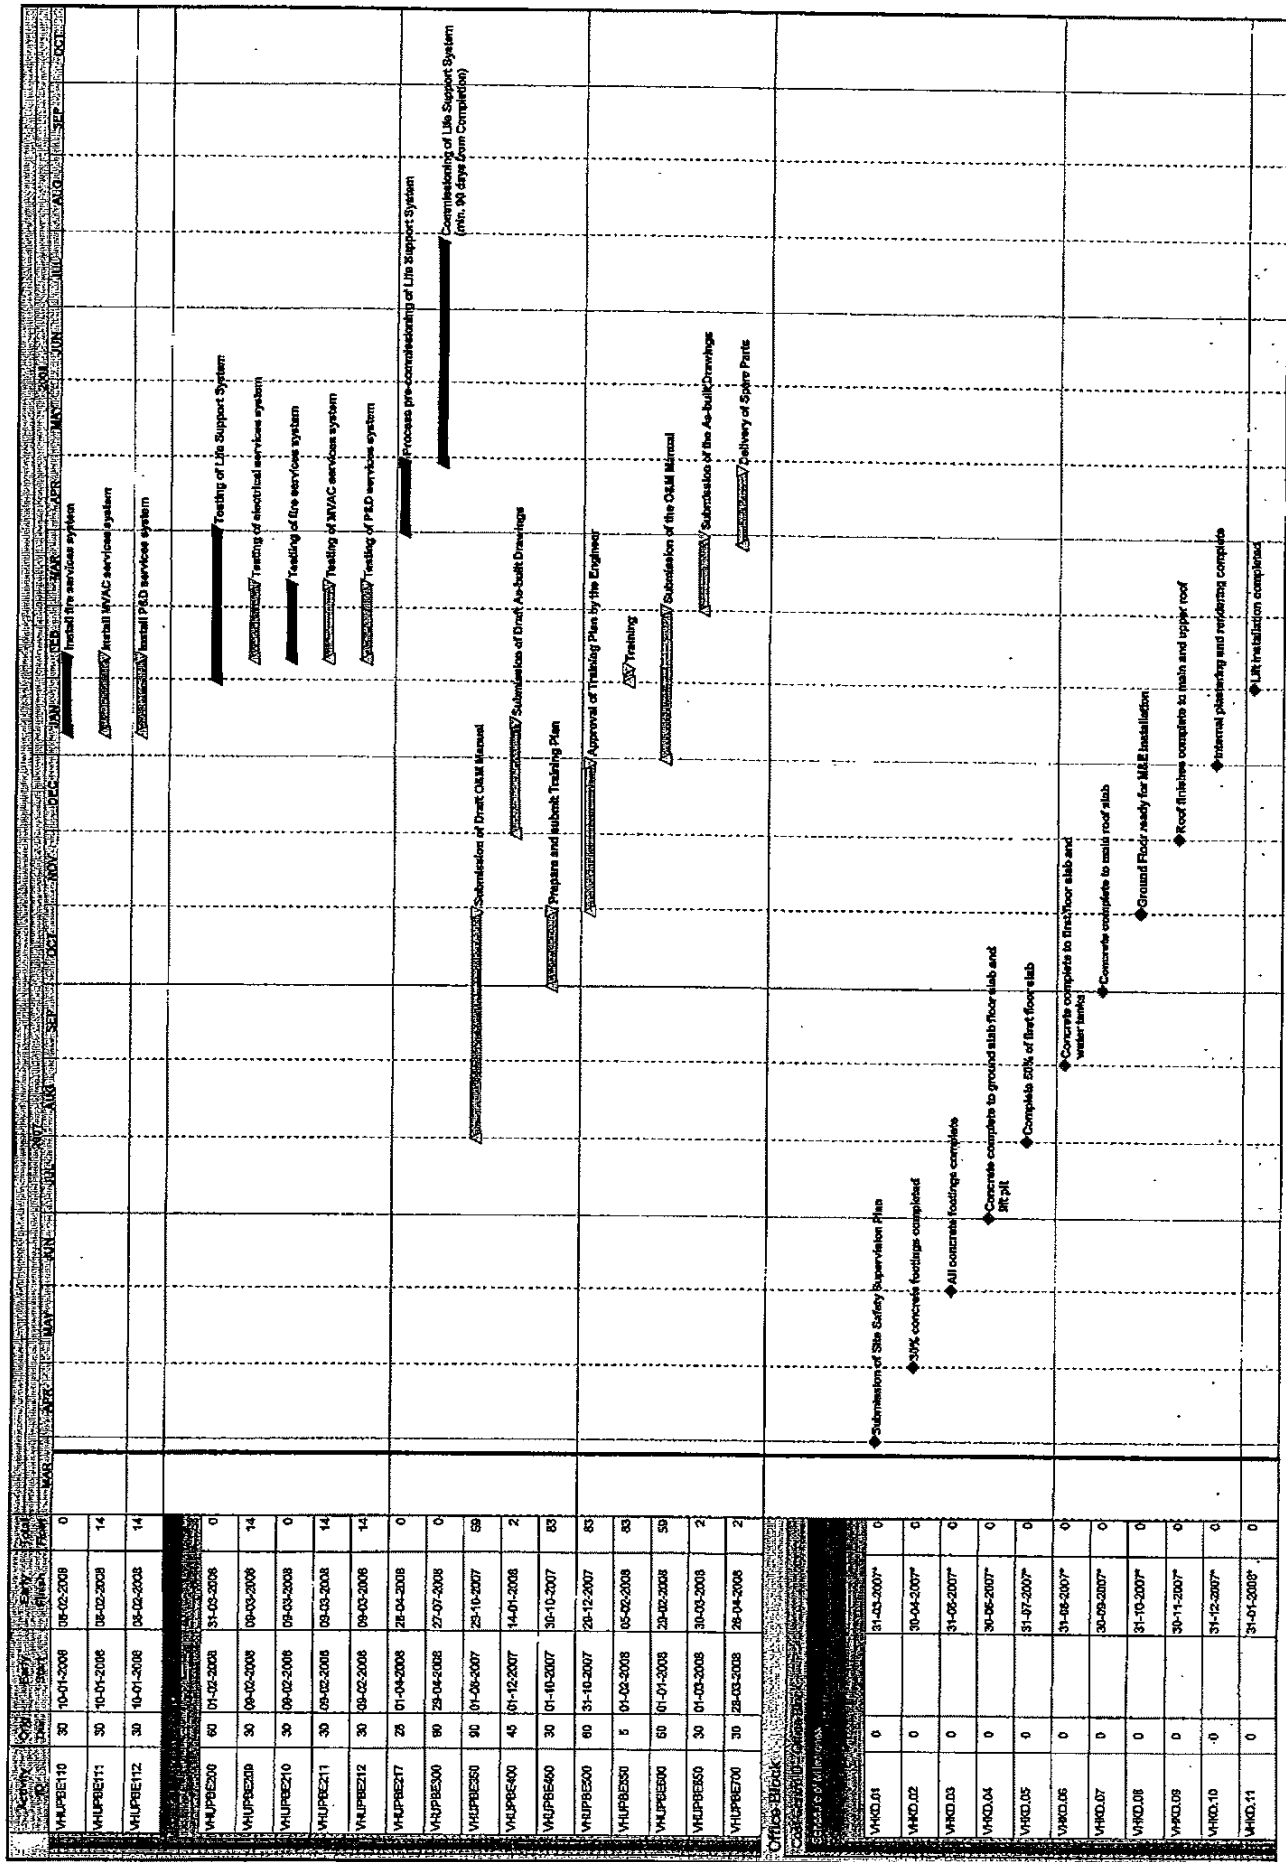

[illegible]

[illegible]

Appendix D

Summary of Environmental Mitigation Implementation Schedule

EIA Ref	EM&A Ref	Environmental Protection Measures*	Location / Timing	Implementation Agent	Implementation Stages**			Relevant Legislation &
					D	C	O	
5.4.15		Noise Mitigation Measures	Work Site / during construction	Contractor		X		PN 2/93 & EIAO
		a) Use of Powered Mechanical Equipment in restricted hours without a valid Construction Noise Permit (GNP) in restricted hours is prohibited, i.e. 7pm and 7am or at any time on general holiday including Sunday GNP						
		c) Every air compressor shall be fitted with a noise emission label issued in respect of that air compressor.						
		d) Every hand held percussive breaker shall be fitted with a noise emission label issued in respect of that hand held percussive breaker.						
		e) Noise barrier should be provided for site which have sufficient space for installation.						
		f) Idle equipment should be turned-off or throttled down. Noisy equipment should be properly maintained and used no more often than						
		g) Noisy equipment and activities should be sited by the Contractor as far from close-proximity sensitive receivers as practical.						
		h) Idle equipment should be turned-off or throttled down. Noisy equipment should be properly maintained and used no more often than						
		i) Construction plant should be properly maintained and operated.						
6.5.9		Air Mitigation Measures	Work Site / during construction	Contractor		X		Air Pollution Control Ordinance, Air Pollution Control (Construction Dust)
		a) For Breaking, Excavation or earth moving, the working area shall be sprayed with water to maintain the entire surface wet.						
		b) Any debris shall be covered or stored in sheltered area and before debris is dumped into a chute, it is to be sprayed with water.						
		c) For use of vehicles, load of dusty materials shall be covered entirely						
		d) Open burning is prohibited.						
		e) A stockpile of dusty materials shall not extend beyond the pedestrian barriers, fencing or traffic cones.						
		f) Vehicle washing facilities shall be provided at every exit point.						
		g) Main haul road shall be sprayed with water.						
7.11.1-7.11.2		Water Mitigation Measures	Work Site / during construction	Contractor		X		ETWB TCW No. 5/2005 and DSD TC No. 2/2004
		a) Temporary drainage system (U-channel) and the sedimentation tank should be installed and maintained frequently to prevent adverse impacts on the stream water qualities.						

Summary of Environmental Mitigation Implementation Schedule

		b) The slope should be covered up to avoid being washed into nearby stream by rain and local runoff.								
		c) Any discharges into drainage or sewage systems, inland or coastal waters, or into the ground (e.g. from septic tanks) are required a valid discharge licence, except the discharge of domestic sewage into foul sewers or the discharge of unpolluted water.								
		d) The terms and conditions of a discharge licence shall be complied sealed								
8.7.9-8.7.12		Chemical Waste Mitigation Measures	Work Site / during construction	Contractor				X		Waste Disposal (Chemical Waste) (General) Code of Practice on the Packaging and Labelling and Storage of Chemical Waste
		a) Chemical waste should be packed and stored in suitable containers in the Chemical Waste Store								
		b) There is displayed on every container of chemical waste a label								
		c) Chemical waste store shall not be used for any purpose other than the storage of chemical waste								
		d) Chemical waste store shall be enclosed on at least 3 sides by a wall, partition fence or a similar device, which shall not be less than the height of the tallest container								
		e) Chemical waste store shall not have any connection to any surface water drains or foul sewers								
		f) Chemical waste store shall be kept clean and dry								
		g) Where the storage area is not within a building, be provided with a roof or a similar covering								
		h) Chemical waste store shall have a retention structure with the capacity to accommodate								
		i) Every storage area where chemical waste is stored displays a warning panel, notice or marking at or near the entrance or the opening, indicate in bold legible red English words and Chinese characters not less than 6 cm in height on a white background "CHEMICAL WASTE"								
		j) Chemical waste stored shall be properly located and easily accessed								
		k) Chemical should be properly stored in suitable containers								
		l) Chemical should be properly stored and sited on sealed areas to prevent leakage								
		m) Any opened chemical container shall be placed into a drip tray to prevent chemical leakage								
8.7.5		Waste Mitigation Measures	Work Site / during construction	Contractor				X		Waste Disposal Ordinance ETWB TCW No. 31/2004
		a) The proposals in the waste management plan are able to meet the target of avoidance, minimization, recycling and reuse of C&D material with particular reference to the nature of the Contract								
		b) Trip-ticket system shall be properly implemented								

