



東業德勤測試顧問有限公司  
**ETS-TESTCONSULT LTD.**<sup>TM</sup>

8/F Block B,  
Veristrong Industrial Centre,  
34-36 Au Pui Wan Street,  
Fo Tan, Hong Kong

T: +852 2695 8318  
F: +852 2695 3944  
E: [eti@ets-testconsult.com](mailto:eti@ets-testconsult.com)  
W: [www.ets-testconsult.com](http://www.ets-testconsult.com)



## **ATAL-DEGREMONT-CHINA HARBOUR JOINT VENTURE**

**CONTRACT NO. DC/2013/10 - DESIGN,  
BUILD AND OPERATE SAN WAI  
SEWAGE TREATMENT WORKS –  
PHASE 1**


**QUARTERLY EM&A REPORT  
NO. 11**

**(01 NOVEMBER 2019 – 31 JANUARY 2020)**

Prepared by:

  
LO, Ting Yi

Certified by:

  
LAU, Chi Leung  
Environmental Team Leader

**Issued Date: 25 February 2020**

**Report No.: ENA01048**

*This report shall not be reproduced unless with prior written approval from this laboratory.*



Drainage Services Department  
Sewage Services Branch  
Harbour Area Treatment Scheme  
5/F, Western Magistracy  
2A Po Fu Lam Road  
Hong Kong

Your reference:

Our reference: HKDSD203/50/106351

Date: 4 March 2020

Attention: Mr Albert Wong

**BY EMAIL & POST**  
**(email: awong@dsd.gov.hk)**

Dear Sirs

Agreement No. HATS 02/2016  
Services for Independent Environmental Checker (IEC) for  
Contract No. DC/2013/10 – Design, Build and Operate San Wai Sewage Treatment Works – Phase 1  
Quarterly Environmental Monitoring and Audit Report No.11 (November 2019 – January 2020)

We refer to emails of 28 February and 2 March 2020 from ETS-Testconsult Limited attaching the Quarterly Environmental Monitoring and Audit Report No.11 (November 2019 – January 2020).

We have no further comment and hereby verify the Quarterly Environmental Monitoring and Audit Report No.11 (November 2019 – January 2020).

Should you have any queries, please do not hesitate to contact the undersigned or our Mr Francis Lau on 2618 2831.

Yours faithfully  
ANewR CONSULTING LIMITED

Adi Lee  
Independent Environmental Checker

LYMA/LHYF/lhnh

cc AECOM – Mr Patrick Leung (email: patrick.leung@swstw-aecom.com)  
ETS-Testconsult Limited – Mr C L Lau (email: env@ets-testconsult.com)



## TABLE OF CONTENTS

<b>EXECUTIVE SUMMARY</b>		<b>Page</b>
<b>1</b>	<b>INTRODUCTION</b>	<b>1-2</b>
1.1	Basic Project Information	1
1.2	Project Organization	1-2
1.3	Construction Programme	2
1.4	Construction Works Undertaken During the Reporting Period	2
<b>2</b>	<b>EM&amp;A REQUIREMENT</b>	<b>3-4</b>
2.1	Summary of EM&A Requirements	3
2.2	Monitoring Requirements	3
2.3	Action and Limit Levels	3-4
2.4	Event and Action plans	4
2.5	Mitigation Measures	4
<b>3</b>	<b>ENVIRONMENTAL MONITORING AND AUDIT</b>	<b>4-8</b>
3.1	Air Quality Monitoring Result	4
3.2	Noise Monitoring Results	4-5
3.3	Water Quality Monitoring Results	5
3.4	Site Inspection	5-6
3.5	Advice on the Solid and Liquid Waste Management Status	6
3.6	Landscape and Visual Audit	6
3.7	Discharge License and Results of Effluent Monitoring	6-7
3.8	Implementation Status of Environmental Mitigation Measures	7-8
<b>4</b>	<b>SUMMARY OF EXCEEDANCE, COMPLAINT, NOTIFICATION OF SUMMONS AND SUCCESSFUL PROSECUTION</b>	<b>9</b>
4.1	Summary of Exceedance of the Environmental Quality Performance Limit	9
4.2	Summary of Complaints, Notification of Summons and Successful Prosecution	9
<b>5</b>	<b>COMMENTS, RECOMMENDATION AND CONCLUSION</b>	<b>9-10</b>
5.1	Comments	9
5.2	Recommendations	9
5.3	Conclusion	10



## LIST OF TABLES

Table 1.1	Contact Information of Key Personnel
Table 2.1	Action and Limit Levels for 1-hr and 24-hr TSP
Table 2.2	Action and Limit Levels for Construction Noise
Table 2.3	Action and Limit Levels for Water Quality
Table 3.1	Environmental Site Inspection Date
Table 3.2	Summary of observation of site inspections
Table 3.3	Effluent Sampling Dates
Table 4.1	Summary of Environmental Complaints Notification of Summons and Successful Prosecution

## LIST OF APPENDICES

Appendix A	Location of Works Areas
Appendix B	Project Organization Chart
Appendix C	Construction Programme
Appendix D	Graphical Plots of Impact Air Quality Monitoring Results
Appendix E	Graphical Plots of Impact Noise Monitoring Data
Appendix F	Graphical Plots of Impact Water Quality Monitoring Data
Appendix G	Event and Action Plan
Appendix H	Implementation Schedule for Environmental Mitigation Measures (EMIS)
Appendix I	Weather Condition
Appendix J	Waste Flow Table

## FIGURES

Figure 1	Air Quality and Noise Monitoring Stations
Figure 2	Water Quality Monitoring Stations
Figure 3	Location Plan for the Wetsep Treatment Tank



## EXECUTIVE SUMMARY

This Quarterly Environmental Monitoring and Audit (EM&A) Report is prepared for Contract No. DC/2013/10 - Design, Build and Operate San Wai Sewage Treatment Works – Stage 1 (the Project) (hereafter referred to as “the Contract”). The Contract was awarded to ATAL-DEGREMONT-CHINA HARBOUR JOINT VENTURE (ADCJV) by the Drainage Services Department (DSD) and ETS-Testconsult Limited was appointed as the Environmental Team (ET) by ADCJV to implement the EM&A program in compliance with the EP and the EM&A Manuals.

According to the Section 25 of the Particular Specification (PS) and the Environmental Permit No. EP-464/2013, an EM&A programme should be implemented in accordance with the procedures and requirements in the EM&A Manual of the approved EIA report (Registration No. AEIAR-072/2003). The scope of monitoring works includes air quality, construction noise, water quality and environmental site audit.

Baseline monitoring was completed in April 2017. Action and Limit Levels were established for air quality, noise and water quality parameters based on the baseline monitoring results.

This is the eleventh Quarterly Environmental Monitoring and Audit (EM&A) Report for the Contract which summaries findings of the EM&A works conducted during the reporting period from 01 November 2019 to 31 January 2020.

### **Environmental Monitoring and Audit Progress**

The quarterly EM&A programme was undertaken in accordance with the EM&A Manual for this Contract. The summary of the monitoring activities in this reporting period is listed below:

- 24-hour TSP Monitoring: 17 Occasions at 2 designated locations
- 1-hour TSP Monitoring: 51 Occasions at 2 designated locations
- Noise Monitoring (Day-time): 17 Occasions at 2 designated locations
- Water Quality Monitoring: 39 Occasions at 1 designated location
- Weekly Site inspection: 13 Occasions

### **Breaches of Action and Limit Levels**

#### **Air Quality Monitoring**

No exceedance of Action and Limit levels was recorded for 1-hr and 24-hr TSP monitoring in the reporting period.

#### **Noise Monitoring**

No exceedance of Action and Limit levels for noise monitoring was recorded in the reporting period.

#### **Water Quality Monitoring**

According to the summary of water monitoring results, no exceedance of Action and Limit levels was recorded in this reporting period.

### **Weekly Site Inspections**

In general, performance on environmental mitigation measures implemented was found to be satisfactory in this reporting period. The major findings observed during site inspections are presented in the **Section 3.4**.

### **Complaint Log**

There was no complaint received in relation to the environmental impact during the reporting period.

### **Notifications of Summons and Successful Prosecutions**

There were no notifications of summons or prosecutions received during the reporting period.

### **Reporting Change**

There were no reporting changes during the reporting period.

## 1 INTRODUCTION

### 1.1. Basic Project Information

- 1.1.1. This Quarterly Environmental Monitoring and Audit (EM&A) Report is prepared for Contract No. DC/2013/10 - Design, Build and Operate San Wai Sewage Treatment Works – Stage 1 (the Project) (hereafter referred to as “the Contract”). The Contract was awarded to ATAL-DEGREMONT-CHINA HARBOUR JOINT VENTURE (ADCJV) by the Drainage Services Department (DSD) and ETS-Testconsult Limited was appointed as the Environmental Team (ET) by ADCJV to implement the EM&A program in compliance with the EP and the EM&A Manuals.
- 1.1.2. The project involves expansion of the preliminary treatment works at San Wai STW from 164,000 m<sup>3</sup>/d to 200,000 m<sup>3</sup>/d Average Dry Weather Flow, upgrading the preliminary treatment level to CEPT and adding centralized disinfection. The site layout plan is shown in **Appendix A**. For any enquiries, hot line telephone (24 hours) at 9083 0560 was established.
- 1.1.3. According to the Section 25 of the Particular Specification (PS) and the Environmental Permit No. EP-464/2013, an EM&A programme should be implemented by an independent Environmental Team (ET) in accordance with the procedures and requirements in the EM&A Manual of the approved EIA report (Registration No. AEIAR-072/2003). These documents are available through the EIA Ordinance Register. The construction works of the Contract commenced on 16 May 2017.
- 1.1.4. The scope of monitoring works includes air quality, construction noise, water quality and environmental site audit. The EM&A requirements for each parameter described in the following sections include:
- All monitoring parameters;
  - Monitoring schedules for the reporting month and forthcoming months;
  - Action and Limit levels for all environmental parameters;
  - Event/Action Plans;
  - Environmental mitigation measures, as recommended in the Project EIA study final report; and
  - Environmental requirements in contract documents
- 1.1.5. As part of the project EM&A program, baseline monitoring was conducted from 21 March 2017 to 15 April 2017 to determine the ambient environmental conditions before the project commence any major construction works and it had been verified by IEC and endorsed by EPD.
- 1.1.6. This is the eleventh Quarterly Environmental Monitoring and Audit (EM&A) Report for the Contract which summaries the audit findings of the EM&A programme during the reporting period from 01 November 2019 to 31 January 2020.
- ### 1.2. Project Organization
- 1.2.1. The project organization structure and lines of communication with respect to the on-site environmental management structure is shown in **Appendix B**. The key personnel contact names and numbers are summarized in **Table 1.1**.

**Table 1.1 Contact Information of Key Personnel**

<b>Party</b>	<b>Position</b>	<b>Name of Key Staff</b>	<b>Tel. No.</b>	<b>E-mail</b>
<i>Supervising Officer (AECOM Asia Co. Ltd.)</i>	<i>Resident Engineer</i>	<i>Mr. Patrick Leung</i>	<i>5222 6561</i>	<i>patrick.leung@swstw-aecom.com</i>
<i>Independent Environmental Checker (ANewR Consulting Limited)</i>	<i>Technical Director</i>	<i>Mr. Adi Lee</i>	<i>2618 2836</i>	<i>aymlee@anewr.com</i>
<i>Contractor (ATAL-DEGREMONT-CHINA HARBOUR JOINT VENTURE)</i>	<i>Environmental Officer</i>	<i>Mr. Johnny So</i>	<i>9513 8899</i>	<i>johnny.so@c302.chechk.com</i>
<i>Environmental Team (ETS-Testconsult Ltd.)</i>	<i>Environmental Team Leader</i>	<i>Mr. C. L. Lau</i>	<i>2946 7791</i>	<i>env@ets-testconsult.com</i>

### 1.3. Construction Programme

1.3.1. A copy of the Contractor's construction programme is provided in **Appendix C**.

### 1.4. Construction Works Undertaken During the Reporting Period

1.4.1. A summary of the construction activities undertaken during this reporting period is shown below:

- *Water Tightness Test;*
- *Internal ABWF;*
- *External ABWF;*
- *Substructure (RC Structure);*
- *Superstructure (RC);*
- *Concrete Protection Coating;*
- *Internal Coating;*
- *Coating;*
- *Culvert Channel Frame Installation;*
- *Slopes and Retaining Wall;*
- *Retaining Wall, U-Channel & Stormwater Pipe;*
- *Underground Utilities Along EVA;*
- *Drainage Inlet Connection (Diversion of 3 Existing Sewage Rising Mains);*
- *CLP Cable Duct and Draw Pits (CLP Scope);*
- *Carriageway & Footway at Zone 3*

## 2 EM&A Requirement

### 2.1. Summary of EM&A Requirements

2.1.1. The scope of monitoring works includes air quality, construction noise, water quality and environmental site audit. The EM&A requirements for each parameter described in the following sections include:

- All monitoring parameters;
- Monitoring schedules for the reporting month and forthcoming months;
- Action and Limit levels for all environmental parameters;
- Event/Action Plans;
- Environmental mitigation measures, as recommended in the Project EIA study final report; and
- Environmental requirements in contract documents

### 2.2. Monitoring Requirements

#### 2.2.1. Air Quality Monitoring

In accordance with the EM&A Manual, 1-hr and 24-hr TSP air quality monitoring were conducted three times and once per six days correspondingly. Air quality monitoring were conducted at ASR1a (晉榮貨櫃服務有限公司) and ASR2a (永康貨櫃服務有限公司), ASR1a (晉榮貨櫃服務有限公司) and ASR1a (晉榮貨櫃服務有限公司) and ASR2b (永康貨櫃服務有限公司) during November 2018, December 2018 and January 2019 respectively, which was shown in **Figure 1** and **Figure 2**.

#### 2.2.2. Noise Monitoring

Noise levels ( $L_{eq}$ ,  $L_{10}$  and  $L_{90}$ ) were monitored in the reporting period in accordance with the EM&A Manual. Noise monitoring were performed at NSR1a (晉榮貨櫃服務有限公司) and NSR2a (永康貨櫃服務有限公司), NSR1a (晉榮貨櫃服務有限公司) and NSR1a (晉榮貨櫃服務有限公司) and NSR2b (永康貨櫃服務有限公司) during August 2018, September 2018 and October 2018 respectively, which was shown in **Figure 1** and **Figure 2**.

#### 2.2.3. Water Quality Monitoring

Water quality was monitored 3 times per week in the reporting period in accordance with the EM&A Manual at the one alternative water quality monitoring station, R1b (at Tin Shui Wai Nullah) which shown in **Figure 2**.

2.2.4 The equipment, monitoring parameters, frequency and duration, monitoring methodology, monitoring schedule, meteorological information are detailed in the monthly EM&A Reports.

### 2.3. Action and Limit Levels

2.3.1. The Action and Limit Levels for 1-hr TSP and 24-hr TSP are provided in **Table 2.1**.

**Table 2.1 Action and Limit Levels for 1-hr and 24-hr TSP**

Air Quality Monitoring Station	1-hr TSP ( $\mu\text{g}/\text{m}^3$ )		24-hr TSP ( $\mu\text{g}/\text{m}^3$ )	
	Action Level	Limit Level	Action Level	Limit Level
ASR1a	309	500	260	260
ASR2b	292	500	228	260



**2.3.2.** The Action and Limit Levels for construction noise are provided in **Table 2.2**

**Table 2.2 Action and Limit Levels for Construction Noise**

<i>Time Period</i>	<i>Action</i>	<i>Limit</i>
0700 – 1900 hrs normal weekdays	When one documented complaint is received	75 dB(A)*

Remark: (\*)70dB(A) for schools and 65dB(A) for schools during school examination period

**2.3.3.** The Action and Limit Levels for Water Quality are provided in **Table 2.3**

**Table 2.3 Action and Limit Levels for Water Quality**

<i>Parameters</i>	<i>Unit</i>	<i>Action</i>	<i>Limit</i>
Turbidity	NTU	19.8	20.5
Dissolved Oxygen	mg/L	1.84	1.81
Suspended Solid	mg/L	17.0	17.8

**2.4. Event and Action Plans**

**2.4.1.** The event and action plan is provided in **Appendix G**.

**2.5. Mitigation Measures**

**2.5.1.** Environmental mitigation measures for the Contract were recommended in the Approved EIA Report. **Appendix H** lists the recommended mitigation measures and the implementation status.

**3 ENVIRONMENTAL MONITORING AND AUDIT**

**3.1. Air Quality Monitoring Result**

**3.1.1.** No exceedance of Action and Limit levels was recorded for 1-hr and 24-hr TSP monitoring in this quarter. Graphical presentation of 1-hour and 24-hour TSP monitoring results is shown in **Appendix D**. Wind data included wind speed and wind direction was extracted from Wetland Park Station of Hong Kong Observatory and is presented in **Appendix I**.

**3.1.2.** Generally, 1-hour TSP and 24-hour TSP monitoring results fluctuated well below the Action Level in this reporting period. The major dust source observed near the monitoring stations was mainly from vehicles passing by the container yards and general earth works. It can be concluded that the contractor implemented sufficient dust mitigation measures during this reporting quarter.

**3.1.3.** Apart from the construction activities, the cargo trunks passing through the container yards (晉榮貨櫃服務有限公司 and 永康貨櫃服務有限公司) would also generate dust since the Ha Tsuen Road was mainly made by soil and sand. A part of 1-hour TSP and 24-hour TSP monitoring results were contributed by the cargo trunks.

**3.2. Noise Monitoring Results**

**3.2.1.** No exceedance of Action and Limit Level of noise monitoring results was recorded during the reporting quarter. Graphical presentation of 1-hour and 24-hour TSP monitoring results for the reporting period is shown in **Appendix E**.

**3.2.2.** The noise monitoring data were found to be lower than the limit level. The major noise source during the monitoring event was the vehicles passing through the container yard entrance and the general earth works inside the construction site.

**3.2.3.** Since NSR1a, NSR2a and NSR2b were located inside the container yards, the frequency of vehicles moving in and out the container yards would influence the noise monitoring results.

### **3.3. Water Quality Monitoring Result**

**3.3.1.** According to the summary of water monitoring results, no exceedance of Action and Limit levels was recorded in this reporting period. Graphical presentation of the monitoring results for the reporting period is shown in **Appendix F**.

**3.3.2.** Generally, the turbidity and suspended solids were found to be lower than the action level. Besides, all results of dissolved oxygen measured in this reporting period were higher than the action level.

**3.3.3.** Aside from the discharge, weather condition would be a major factor that affects the water quality in Tin Shui Wan Nallah. In rainy day, the soil and other suspended materials were flushed along the shore and entered the Tin Shui Wai Nullah. Besides, the nullah water would flow rapidly and the sand and stones in the nullah bed were upturned. Thus, the water quality would be deteriorated.

### **3.4. Site Inspection**

**3.4.1.** Site Inspections were carried out on a weekly basis to monitor the implementation of proper environmental pollution control mitigation measures for the project. The dates of environmental site inspections during the reporting period are listed in **Table 3.1**.

**Table 3.1 Environmental Site Inspection Date**

<b>November 2019</b>	<b>December 2019</b>	<b>January 2020</b>
01, 08, 15, 22 and 29	06, 13, 20 and 27	03, 10, 17 and 22

**3.4.2.** Observations for the site inspections within this reporting period are summarized in **Table 3.2**.

**Table 3.2 Summary of observation of site inspections**

<b>Date</b>	<b>Observations / Reminders</b>	<b>Follow-up Action</b>	<b>Closed Date</b>
25 October 2019	1. Stagnant water was observed at CEPT area	1. Stagnant water was cleaned.	01 November 2019
01 November 2019	--	--	--
08 November 2019	--	--	--
14 November 2019	1. General refuse was observed at Area P1. 2. Dust emission was observed at Area P1.	1. General refuse was collected. 2. Water spray was provided.	22 November 2019
22 November 2019	1. C&D material was observed disposed improperly at P1.	1. C&D materials were collected properly.	28 November 2019
28 November 2019	1. Stagnant water was observed at Area P1.	1. Stagnant water was cleared.	06 December 2019
06 December 2019	--	--	--
13 December 2019	--	--	--
20 December 2019	1. Fugitive dust was observed near the entrance	1. Watering was provided.	27 December 2019
27 December 2019	--	--	--

03 January 2020	--	--	--
10 January 2020	1. General refuse were observed near CB.	1. General refuse were collected.	17 January 2020
17 January 2020	1. Oil container was found without drip tray. 2. General refuse and stagnant water was observed near eastern boundary. Reminder 1 – The contractor was reminded to check if the NRMM label displayed properly.	1. Oil container was removed. 2. General refuse and stagnant water was cleared.	22 January 2020
22 January 2020	1. Stagnant water was observed.	1. Stagnant water was cleared.	07 February 2020

### 3.5. Advice on the Solid and Liquid Waste Management Status

#### 3.5.1. All types of waste arising from the construction work are classified into the following:

- Construction & Demolition (C&D) Material;
- Chemical Waste;
- General Refuse; and
- Excavated Soil

#### 3.5.2. The quantities of waste for disposal in this reporting period are summarized in the Monthly Summary Waste Flow Table which is shown in **Appendix J**.

#### 3.5.3. To control over the site performance on waste management, the Contractor shall ensure that all solid and liquid waste management works are in full compliance with the relevant license/permit requirements, such as the effluent discharge license and the chemical waste producer registration. The Contractor is also reminded to implement the recommended environmental mitigation measures according to the EM&A Manual based on actual site conditions.

### 3.6. Landscape and Visual Audit

#### 3.6.1. Landscape and visual audits were undertaken at least once every two weeks throughout the construction period by a competent landscape architect. During the reporting period, audits were carried out on 01, 15 and 29 November 2019, 12 and 27 December 2019, 09 and 22 January 2020.

#### 3.6.2. Observations and reminders were summarized in the landscape and visual impact assessment checklists which are attached in the monthly EM&A reports.

### 3.7. Discharge License and Results of Effluent Monitoring

#### 3.7.1. Effluent quality was monitored in the reporting quarter in accordance with the EM&A Manual at the discharge point. The location of Wetsep treatment tank was shown in **Figure 3**. A discharge license under Water Pollution Control Ordinance was obtained by the Contractor upon commencement of the Project. Self-monitoring would be performed as per the requirement under the discharge license. According to the EM&A Manual, pH, chemical oxygen demand and total suspended solid are required to be analysed at least once every two week.

#### 3.7.2. Effluent water samples were sampled by the Contractor. The dates of effluent sampling during the reporting period are listed in **Table 3.3**. As only Wetsep at P8 was operated on October 2019, the effluent water sample was sampled at P8 only on both 05 and 19 November 2019. During December 2019, Only Wetsep at P8 was operated and thus the effluent water sample was sampled at P8 only on 03, 17 and 31 December 2019. During January 2020, only Wetsep at P8 was operated and thus the effluent water sample was sampled at P8 only on 14 and 21 January 2020.

**Table 3.3 Effluent Sampling Dates**

November 2019	December 2019	January 2020
05 and 19	03, 17 and 31	14 and 21

**3.7.3.** The required testing parameter including pH, chemical oxygen demand and total suspended solid were carried out in a HOKLAS laboratory. The methods of chemical oxygen demand and total suspended solid determination follow APHA 19ed 5220 B and APHA 19ed 2540 D respectively.

**3.7.4.** For effluent quality monitoring as per the discharge license requirement, the results complied with the discharge license requirement.

### **3.8. Implementation Status of Environmental Mitigation Measures**

**3.8.1.** The environmental mitigation measures that recommended in the Environmental Monitoring and Audit Manual covered the issues of dust, noise and waste and they are summarized as following:

#### **Dust Mitigation Measures**

- a. The working area for the uprooting of trees, shrubs, or vegetation or for the removal of boulders, poles, pillars or temporary or permanent structures should be sprayed with water or a dust suppression chemical immediately before, during and immediately after the operation so as to maintain the entire surface wet;
- b. All demolished items (including trees, shrubs, vegetation, boulders, poles, pillars, structures, debris, rubbish and other items arising from site clearance) that may dislodge dust particles should be covered entirely by impervious sheeting or placed in an area sheltered on the top and the 3 sides within a day of demolition;
- c. Vehicle washing facilities including a high pressure water jet should be provided at every discernible or designated vehicle exit point;
- d. The area where vehicle washing takes place and the section of the road between the washing facilities and the exit point should be paved with concrete, bituminous materials or hardcores;
- e. Where a site boundary adjoins a road, street, service and or other area accessible to the public, hoarding of not less than 2.4m from ground level should be provided along the entire length of that portion of the site boundary except for a site entrance or exit;
- f. Every main haul road (i.e. any course inside a construction site having a vehicle passing rate of higher than 4 in any 30 minutes) should be paved with concrete, bituminous materials, hardcores or metal plates, and kept clear of dusty materials; or sprayed with water or a dust suppression chemical so as to maintain the entire road surface wet;
- g. The portion of any road leading only to a construction site that is within 30m of a discernible or designated vehicle entrance or exit should be kept clear of dusty materials;
- h. Immediately before leaving a construction site, every vehicle should be washed to remove any dusty materials from its body and wheels;
- i. Where a vehicle leaving a construction site is carrying a load of dusty materials, the load should be covered entirely by clean impervious sheeting to ensure that the dusty materials do not leak from the vehicle;
- j. The working area of any excavation or earth moving operation should be sprayed with water or a dusty suppression chemical immediately before, during and immediately after the operation so as to maintain the entire surface wet;
- k. Exposed earth shall be properly treated by compaction, turfing, hydroseeding, vegetation planting or sealing with latex, vinyl, bitumen, shotcrete or other suitable surface stabilizer within 6 months after the last construction activity on the construction site or part of the construction site where the exposed earth lies;
- l. Any stockpile of dusty material should be either covered entirely by impervious sheeting; placed in an area sheltered on the top and the 3 sides; or sprayed with water or a dust suppression chemical so as to maintain the entire surface wet.



### **Noise Mitigation Measures**

- a. Quiet plants should be used in order to reduce the noise impacts to protect the nearby NSRs.
- b. Temporary and Movable Noise Barriers should be used in order to reduce the noise impact to the surrounding sensitive receivers
- c. The contractor should site noisy equipment and activities as far from sensitive receivers as practical.
- d. Idle equipment should be turned off or throttled down.
- e. Construction activities should be planned so that parallel operation of several sets of equipment close to a given receiver is avoided
- f. Construction plant should be properly maintained and operated.

### **Water Quality Mitigation Measures**

- a. Exposed stockpiles should be covered with tarpaulin or impervious sheets before a rainstorm occurs;
- b. The exposed soil surfaces should also be properly protected to minimize dust emission;
- c. The stockpiles of materials should be placed in the locations away from the drainage channel so as to avoid releasing materials into the channel;
- d. Wheel washing facilities should be provided at site exits to ensure that earth, mud and debris would not be carried out of the works areas by vehicles;
- e. Provision of site drainage systems and treatment facilities would be required to minimize the water pollution;
- f. A discharge license needs to be applied from EPD for discharging effluent from the construction site;
- g. The treated effluent quality is required to meet the requirements specified in the discharge license;
- h. Provision of chemical toilets is required to collect sewage from workforce. The chemical toilets should be cleaned on a regular basis;
- i. A licensed waste collector should be employed to clean the chemical toilets and temporary storage tank on a regular basis;
- j. Illegal disposal of chemicals should be strictly prohibited;
- k. Registration as a chemical waste producer is required if chemical wastes are generated and need to be disposed of. The Waste Disposal Ordinance (Cap 354) and its subsidiary regulations in particular the Waste Disposal (Chemical Waste) (General) Regulation should be observed and complied with for control of chemical wastes;
- l. Disposal of chemical wastes should be carried out in compliance with the Waste Disposal Ordinance. The Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes published under the Waste Disposal Ordinance should be used as a guideline for handling chemical wastes;
- m. The impact from accidental spillage of chemicals can be effectively controlled through good management practices.

### **Waste Management Mitigation Measures**

- a. Segregation and storage of different types of waste in different containers, skips or stockpiles to enhance reuse or recycling of materials and their proper disposal;
- b. To encourage collection of aluminium cans by individual collectors, separate bins should be provided to segregate this waste from other general refuse generated by the workforce;
- c. Any unused chemicals or those with remaining functional capacity should be recycled;
- d. Prior to disposal of C&D waste, it is recommended that wood, steel and other metals be separated for re-use and/or recycling and inert waste as fill material to minimize the quantity of waste to be disposed of to landfill;
- e. Proper storage and site practices to minimize the potential for damage or contamination of construction materials; and
- f. Plan and stock construction materials carefully to minimize amount of waste generated and avoid unnecessary generation of waste.

## 4 SUMMARY OF EXCEEDANCE, COMPLAINT, NOTIFICATION OF SUMMONS AND SUCCESSFUL PROSECUTION

### 4.1. Summary of Exceedance of the Environmental Quality Performance Limit

- 4.1.1. There was no Action and Limit level exceedance of 1-hour and 24-hr TSP monitoring was recorded at station ASR1a and ASR2a during this reporting period.
- 4.1.2. There was no Action and Limit Level exceedance for noise recorded at station NSR1a and NSR2a during the reporting period.
- 4.1.3. According to the summary of water monitoring results, there was no Action and Limit Level exceedance for water quality monitoring recorded at station R1b during the reporting period.

### 4.2. Summary of Complaints, Notification of Summons and Successful Prosecution

- 4.2.1. There were no complaints received during the reporting period.
- 4.2.2. There were no notifications of summons or prosecutions received during the reporting period.
- 4.2.3. A summary of environmental complaints, notifications of summons and successful prosecutions was given in **Table 4.1**.

**Table 4.1 Summary of Environmental Complaints Notification of Summons and Successful Prosecution**

Reporting Period	Cumulative Statistic		
	Complaints	Notifications of summons	Successful prosecutions
The reporting period	0	0	0
From commencement date of construction to end of reporting month	0	0	0

## 5 COMMENTS, RECOMMENDATIONS AND CONCLUSION

### 5.1. Comments

- 5.1.1. According to the environmental site inspection undertaken during the reporting period, the following recommendations were provided:
- The Contractor was reminded to clear all the stagnant water pools;
  - The Contractor was reminded to collect the general refuse properly;
  - The Contractor was reminded to maintain the Wetsep properly.

### 5.2. Recommendations

- 5.2.1. With implementation of the recommended environmental mitigation measures, the contract's environmental impacts were considered environmentally acceptable. The weekly environmental site inspections ensured that all the environmental mitigation measures recommended were effectively implemented.
- 5.2.2. The recommended environmental mitigation measures, as included in the EM&A programme, effectively minimize the potential environmental impacts from the Contract. Also, the EM&A programme effectively monitored the environmental impacts from the construction activities and ensure the proper implementation of mitigation measures. No particular recommendation was advised for the improvement of the programme.



### **5.3. Conclusions**


- 5.3.1.** There was no Action and Limit level exceedance of 1-hour and 24-hr TSP monitoring was recorded at station ASR1a and ASR2a during this reporting period.
- 5.3.2.** There was no Action and Limit Level exceedance for noise recorded at station NSR1a and NSR2a during the reporting period.
- 5.3.3.** According to the summary of water monitoring results, there was no Action and Limit Level exceedance for water quality monitoring recorded at station R1b during the reporting period.
- 5.3.4.** Environmental site inspections were carried out on 01, 08, 15, 22 & 29 November 2019, 06, 13, 20 & 27 December 2019 and 03, 10, 17 & 22 January 2020. Recommendations on remedial actions were given to the Contractors for the deficiencies identified during the site inspections.
- 5.3.5.** There were no complaints received during the reporting period.
- 5.3.6.** There was no notification of summons and successful prosecution received during the reporting period.

**- END OF REPORT -**

## **Appendix A**


### **Location of Works Areas**



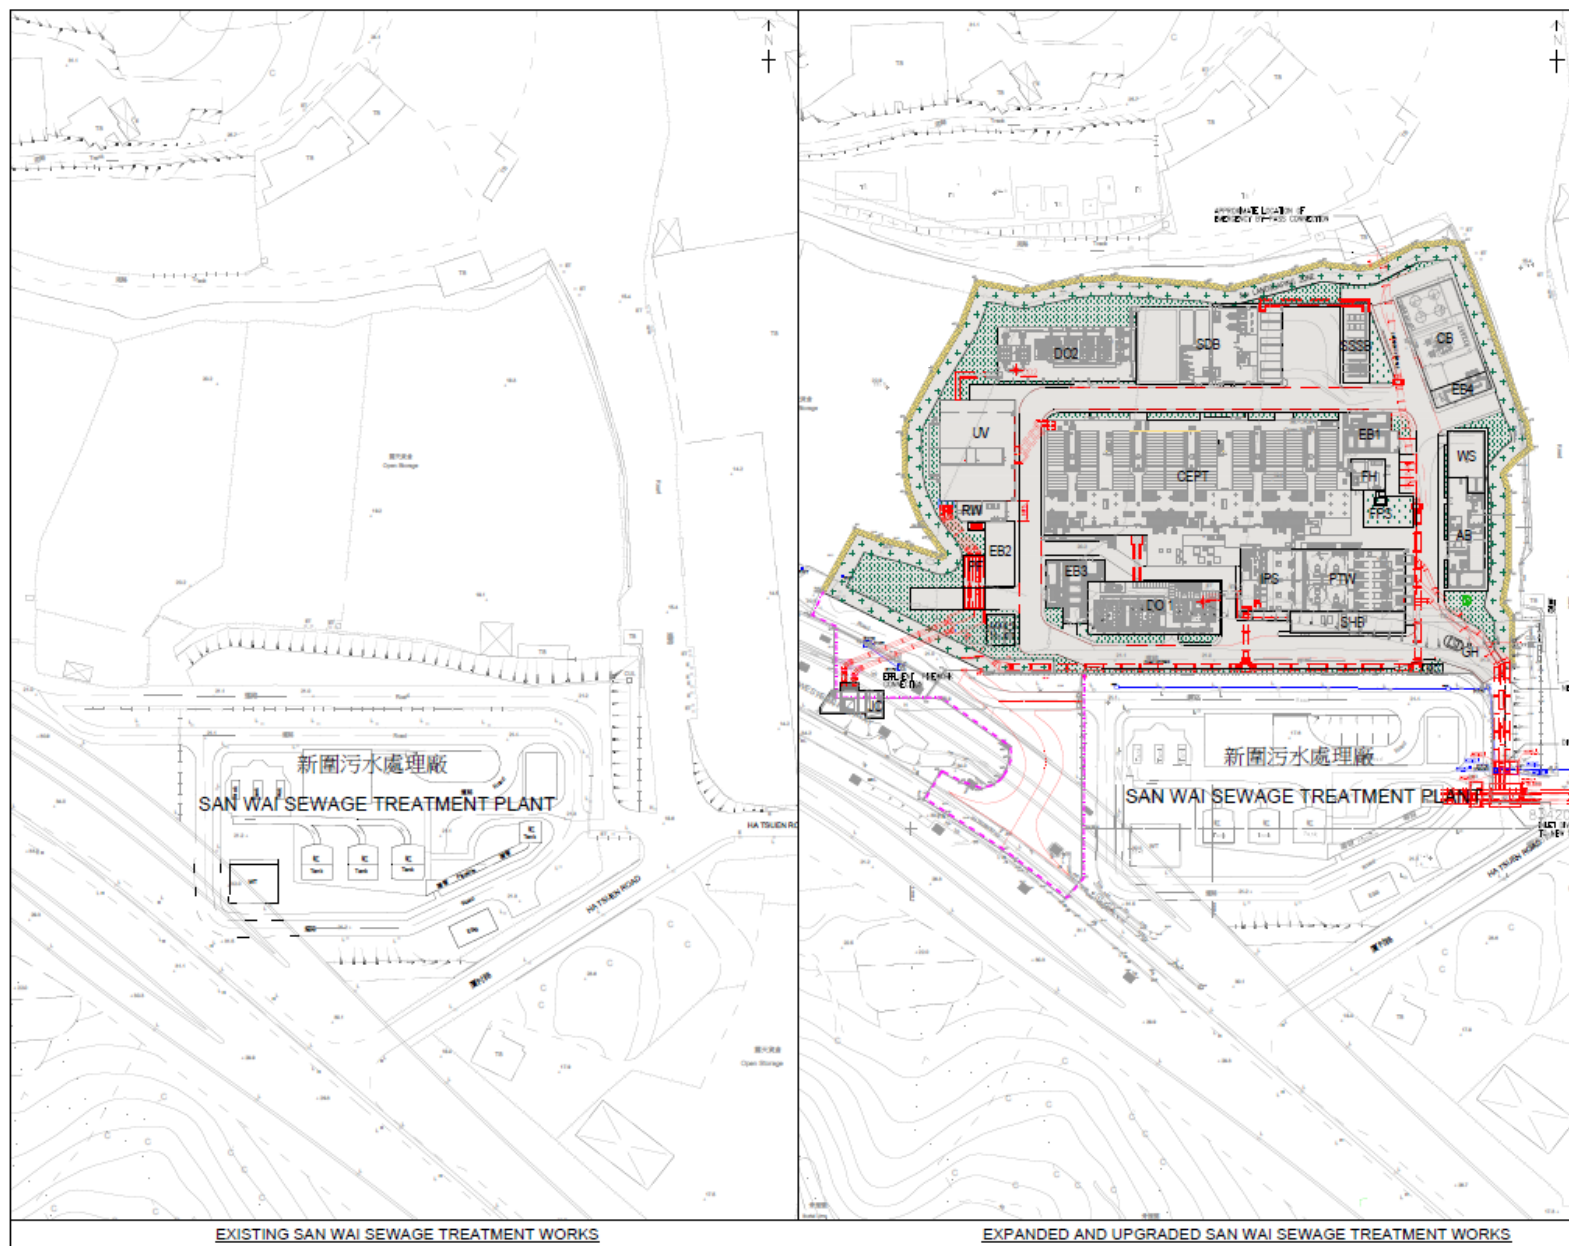

## **Appendix B**

### **Project Organization Chart**

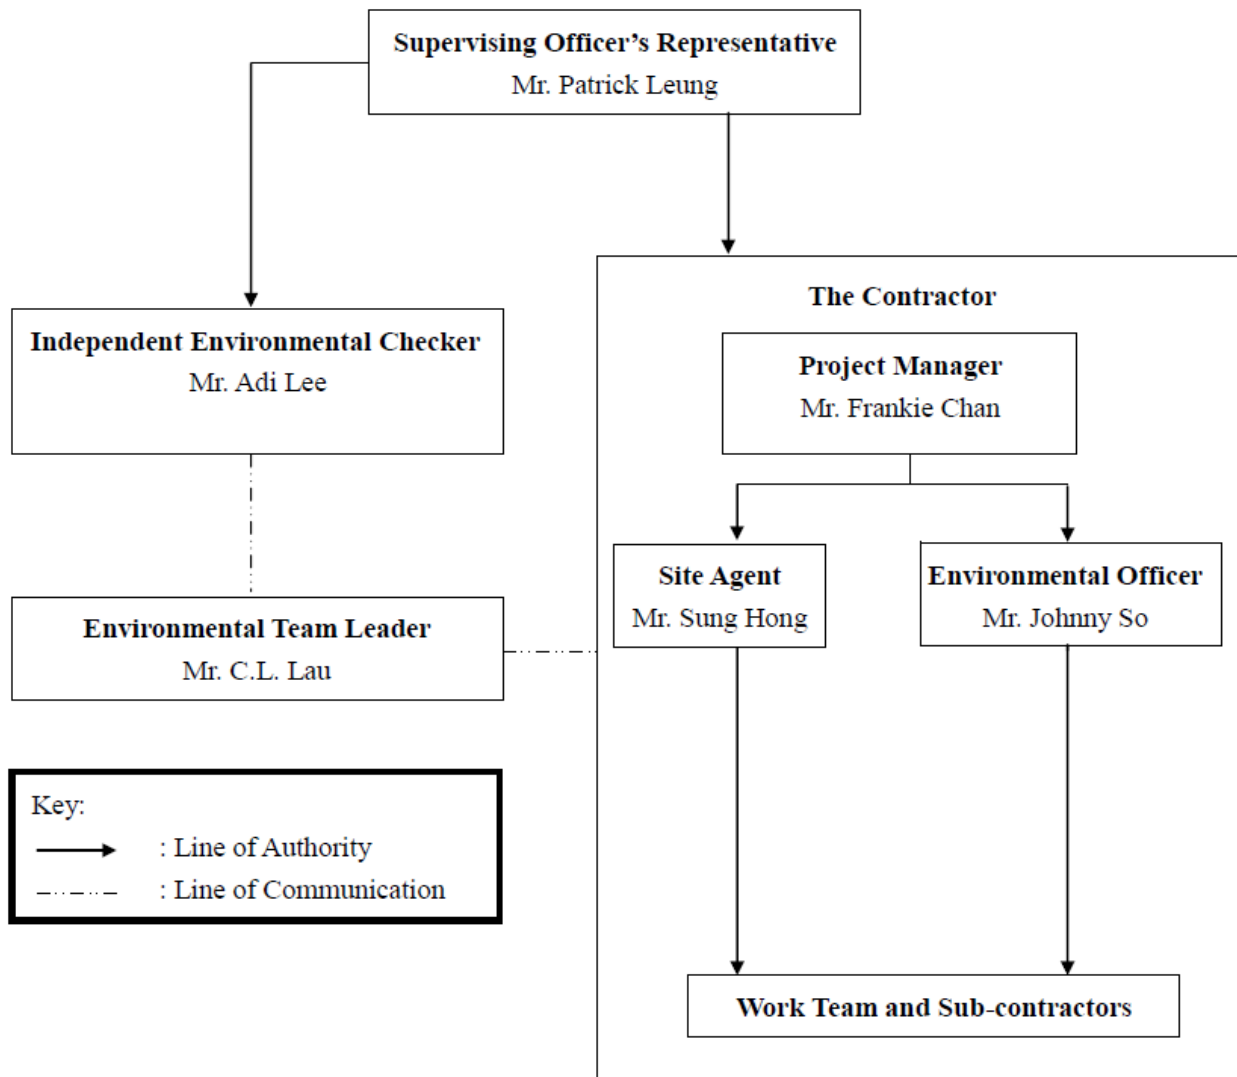



## **Appendix C**

### **Construction Programme**



DATA DATE: 30-Nov-19		LAYOUT: SW Project Phase 1 TP 4 (3M30Nov19)CODE			PAGE 1 OF 5				
Activity ID	Activity Name	At Completion Duration	Start	Finish	2019		2020		
					Nov	Dec	Jan	Feb	Mar
SWSTW Phase 1 - 3 Month Rolling Programme (Dec 2019 to Feb 2020)									
Key Date		453	21-Jan-19 A	17-Apr-20					Key Date
Key Date		81	30-Nov-19	19-Feb-20					Key Date
Administration Building & Maintenance Workshop									Administration Building & Maintenance Workshop
Water Tightness Test		127	15-Aug-19 A	19-Dec-19					Water Tightness Test
Internal ABWF (Subject to H/O back to C&S for outstanding ABWF)		363	21-Jan-19 A	18-Jan-20					Internal ABWF (Subject to H/O back to C&S for outstanding ABWF)
External ABWF		79	01-Nov-19 A	18-Jan-20					External ABWF
Inlet Works, Preliminary Treatment Units & Inlet Pumping Station									Inlet Works, Preliminary Treatment Units & Inlet Pumping Station
Superstructure (RC) - Mass Concrete Fill		10	10-Dec-19	19-Dec-19					Superstructure (RC) - Mass Concrete Fill
Water Tightness Test (Commence after Penstock Installation)		52	19-Dec-19	08-Feb-20					Water Tightness Test (Commence after Penstock Installation)
Coating		57	04-Jan-20	29-Feb-20					Coating
External ABWF		15	17-Feb-20	02-Mar-20					External ABWF
Solid Handling Building									Solid Handling Building
Internal ABWF		87	09-Sep-19 A	04-Dec-19					Internal ABWF
External ABWF		30	05-Dec-19	03-Jan-20					External ABWF
System Control Flowmeter Chamber									System Control Flowmeter Chamber
Superstructure (RC) (After Pipe Installation DN1200 by ATAL)		30	16-Dec-19	14-Jan-20					Superstructure (RC) (After Pipe Installation DN1200 by ATAL)
Chemically Enhanced Primary Treatment									Chemically Enhanced Primary Treatment
Water Tightness Test (Commence after Penstock Installation)		24	07-Jan-20	30-Jan-20					Water Tightness Test (Commence after Penstock Installation)
External ABWF		32	05-Jan-20	05-Feb-20					External ABWF
Concrete Protection Coating (Commence after E&M Installation works)		34	10-Dec-19	12-Jan-20					Concrete Protection Coating (Commence after E&M Installation works)
Deodorization Facilities No.1									Deodorization Facilities No.1
External Structural Works (Commence after E&M Installation works)		91	01-Jan-20	31-Mar-20					External Structural Works (Commence after E&M Installation works)
Deodorization Facilities No.2									Deodorization Facilities No.2
External Structural Works (Commence after E&M Installation works)		91	17-Jan-20	17-Apr-20					External Structural Works (Commence after E&M Installation works)
Sludge Dewatering Building									Sludge Dewatering Building
Internal ABWF		10	06-Dec-19	15-Dec-19					Internal ABWF
Internal Coating		19	12-Dec-19	30-Dec-19					Internal Coating
External ABWF		152	01-Aug-19 A	30-Dec-19					External ABWF
UV Disinfection Facilities									UV Disinfection Facilities
Water Tightness Test (Commence after Penstock Installation)		59	22-Oct-19 A	19-Dec-19					Water Tightness Test (Commence after Penstock Installation)
Coating		21	20-Dec-19	09-Jan-20					Coating
Culvert Channel Frame Installation		30	20-Dec-19	18-Jan-20					Culvert Channel Frame Installation
External ABWF		138	05-Aug-19 A	20-Dec-19					External ABWF
Re-use Water Building									Re-use Water Building
External ABWF		45	22-Oct-19 A	05-Dec-19					External ABWF
		45	22-Oct-19 A	05-Dec-19					External ABWF
<div><div><div>Actual Work</div><div>Remaining Work</div><div>Critical Remaining Work</div><div>Milestone</div><div>Summary</div></div></div>					<div><div><div>ATAL</div><div>Surge</div><div>CHC</div></div><div>ATAL-Degremont-China Harbour Joint Venture</div></div>				
TASK filter: 3 Months Rolling Programme C&S Breakdown.					DateRevisionCheckedApproved				
CONTRACT NO. DC/2013/10 DESIGN, BUILD & OPERATE					30-Nov-19Three (3) Months Rolling Programme...				
SAN WAI SEWAGE TREATMENT WORKS - PHASE 1									
THREE (3) MONTHS ROLLING PROGRAMME (30 Nov 2019)									
C&S WORKS									



DATA DATE: 30-Nov-19		LAYOUT: SW Project Phase 1 TP 4 (3M30Nov19) CODE			PAGE 2 OF 5				
Activity ID	Activity Name	At Completion Duration	Start	Finish	2019		2020		
					Nov	Dec	Jan	Feb	Mar
Payment Flowmeter Chamber		5	20-Dec-19	24-Dec-19			Payment Flowmeter Chamber		
Application of Liquid Applied Membrane		5	20-Dec-19	24-Dec-19			Application of Liquid Applied Membrane		
Existing Junction Chamber		30	01-Jan-20	30-Jan-20			Existing Junction Chamber		
Bar Screen Installation		30	01-Jan-20	30-Jan-20			Bar Screen Installation		
Electrical Building No.3		101	26-Aug-19 A	04-Dec-19		Electrical Building No.3			
External ABWF		101	26-Aug-19 A	04-Dec-19		External ABWF			
DG Store and Chemical Waste Storage Building and Irrigation & Cleansing Water Pump Room		40	10-Jan-20	18-Feb-20			DG Store and Chemical Waste		
Substructure (RC Structure)		15	10-Jan-20	24-Jan-20			Substructure (RC Structure)		
Superstructure (RC)		17	20-Jan-20	05-Feb-20			Superstructure (RC)		
Internal ABWF		7	06-Feb-20	12-Feb-20			Internal ABWF		
External ABWF		7	12-Feb-20	18-Feb-20			External ABWF		
Sludge Skip Storage Building		76	30-Nov-19	13-Feb-20			Sludge Skip Storage Building		
Substructure (RC Structure)		19	30-Nov-19	18-Dec-19		Substructure (RC Structure)			
Superstructure (RC)		34	19-Dec-19	21-Jan-20		Superstructure (RC)			
Internal ABWF		14	18-Jan-20	31-Jan-20			Internal ABWF		
External ABWF		14	31-Jan-20	13-Feb-20			External ABWF		
Street Fire Hydrant Pump Room & GENSET Room		10	02-Dec-19	11-Dec-19		Street Fire Hydrant Pump Room & GENSET Room			
Water Tightness Test		10	02-Dec-19	11-Dec-19		Water Tightness Test			
Gatehouse		40	11-Jan-20	19-Feb-20			Gatehouse		
Substructure (RC Structure)		9	11-Jan-20	19-Jan-20			Substructure (RC Structure)		
Superstructure (RC)		25	20-Jan-20	13-Feb-20			Superstructure (RC)		
Internal ABWF		6	14-Feb-20	19-Feb-20			Internal ABWF		
External ABWF		6	14-Feb-20	19-Feb-20			External ABWF		
Water Meter Cabinet		25	18-Jan-20	11-Feb-20			Water Meter Cabinet		
Substructure (RC Structure)		11	18-Jan-20	28-Jan-20			Substructure (RC Structure)		
Superstructure (RC)		7	29-Jan-20	04-Feb-20			Superstructure (RC)		
ABWF		7	05-Feb-20	11-Feb-20			ABWF		
Foul Water Pump Room		74	21-Nov-19 A	02-Feb-20			Foul Water Pump Room		
Substructure (RC Structure)		42	21-Nov-19 A	01-Jan-20		Substructure (RC Structure)			
Superstructure (RC)		8	02-Jan-20	09-Jan-20			Superstructure (RC)		
Water Tightness Test		14	10-Jan-20	23-Jan-20			Water Tightness Test		
Coating		10	24-Jan-20	02-Feb-20			Coating		
ABWF		7	27-Jan-20	02-Feb-20			ABWF		
Slopes and Retaining Wall		115	03-Dec-19	26-Mar-20					
Section Completion Date		0	05-Jan-20	05-Jan-20			Section Completion Date		
Section Completion Date		0	05-Jan-20	05-Jan-20			Section Completion Date		
Section 1		34	03-Dec-19	05-Jan-20			Section 1		
North of DO2		34	03-Dec-19	05-Jan-20			North of DO2		
Section 2		91	27-Dec-19	26-Mar-20					
North of SSSB		61	27-Dec-19	25-Feb-20			North of SSSB		
North of CB, EB4 and SDB		91	27-Dec-19	26-Mar-20					



DATA DATE: 30-Nov-19		LAYOUT: SW Project Phase 1 TP 4 (3M30Nov19)/CODE			PAGE 3 OF 5				
Activity ID	Activity Name	At Completion Duration	Start	Finish	2019		2020		
					Nov	Dec	Jan	Feb	Mar
<b>Section 3</b>									Section 3
<b>East of CB and EB4</b>									East of CB and EB4
<b>Slope</b>									Slope
<b>West Side of the Project</b>									West Side of the Proj
<b>Underground Utilities Along EVA</b>									
<b>Zone Completion Dates</b>									Zone Completion Dates
<b>Zone Completion Dates</b>									Zone Completion Dates
P8UU	Underground Utilities Along EVA (Portion 8 Area)	0	25-Dec-19						
Z1UU	Zone 1 Underground Utilities Along EVA	0	18-Dec-19						
Z2UU	Zone 2 Underground Utilities Along EVA	0	23-Jan-20						
Z3UU	Zone 3 Underground Utilities Along EVA	0	28-Dec-19						
Z4UU	Zone 4A Underground Utilities Along EVA	0	14-Jan-20						
Z4BUU	Zone 4B Underground Utilities Along EVA	0	29-Dec-19						
Z5UU	Zone 5 Underground Utilities Along EVA	0	16-Jan-20						
Z6UU	Zone 6 Underground Utilities Along EVA	0	05-Feb-20						
<b>P8 Area</b>									
<b>Retaining Wall, U-Channel &amp; Stormwater Pipe</b>									
UUP8-1050	Construction of 900 U-Channel (East Side of Retaining Wall)	21	09-Dec-19	29-Dec-19					
UUP8-1055	Dia. 1050 mm Stormwater Pipe Installation including Manhole S1.07-S1.08	97	02-Jan-20	07-Apr-20					
<b>Drainage Inlet Connection (Diversion of 3 Existing Sewage Rising Mains)</b>									
UUP8-1080	Testing	7	01-Dec-19	07-Dec-19					
UUP8-1085	Backfilling up to Bottom Elevation of WSD Watermains	11	08-Dec-19	18-Dec-19					
UUP8-1090	Remove Sheet Pile ( West Side of Rising Main)	11	08-Dec-19	18-Dec-19					
UUP8-1091	Connection to Existing Rising Mains PC	21	19-Dec-19	08-Jan-20					
UUP8-1092	Connection to Existing Rising Mains PB	33	09-Jan-20	10-Feb-20					
UUP8-1093	Connection to Existing Rising Mains PA	17	11-Feb-20	27-Feb-20					
<b>Sitewide Watermains (WSD Scope)</b>									
UUP8-1095	Bedding and Compaction	7	28-Feb-20	05-Mar-20					
<b>CLP Cable Duct and Draw Pits (CLP Scope)</b>									
UUP8-1115	Bedding and Compaction	2	02-Dec-19*	03-Dec-19					
UUP8-1120	PVC Pipe Laying	2	04-Dec-19	05-Dec-19					
UUP8-1130	Backfilling	1	06-Dec-19	06-Dec-19					
UUP8-1135	CLP Cabling from P8 to EB1~EB4	19	07-Dec-19	25-Dec-19					
<b>ZONE 1</b>									
<b>Underground Utilities Along EVA</b>									
UUIZ1025	FR(P) / IRP / REP / RLP / PWP / SHP / HP / CLWP (Pipe Installation by ATAL)	46	28-Oct-19 A	12-Dec-19					
UUIZ1030	Backfilling to Sub-base Level	6	13-Dec-19	18-Dec-19					
<b>ZONE 2</b>									
<b>Underground Utilities Along EVA</b>									
UUIZ2010	375 DIA. Stormwater Pipe / 14x150 LV	77	30-Sep-19 A	15-Dec-19					
UUIZ2015	REP / IRP / CLWP / FR(P) / HP / SHP (Pipe Installation by ATAL)	21	16-Dec-19	05-Jan-20					
UUIZ2020	Backfill to Sub-base level of CLP Portion	7	06-Jan-20	12-Jan-20					
UUIZ2025	ELS for By-Pass Pipe (Remaining)	14	25-Nov-19 A	08-Dec-19					
UUIZ2030	Emergency By-Pass Pipe (Include N-S Direction from IPS)	86	21-Sep-19 A	15-Dec-19					
UUIZ2035	900 DIA. Stormwater Pipe	12	16-Dec-19	27-Dec-19					





DATA DATE: 30-Nov-19		LAYOUT: SW Project Phase 1 TP 4 (3M30Nov19)CODE			PAGE 4 OF 5				
Activity ID	Activity Name	At Completion Duration	Start	Finish	2019		2020		
					Nov	Dec	Jan	Feb	Mar
UUZ2038	4x100 LV / 8x150 ELV	14	28-Dec-19	10-Jan-20					
UUZ2040	Backfilling from Elevation +19.0 Mpd up to Sub-base Level of By-Pass Portion	18	11-Jan-20	28-Jan-20					
<b>ZONE 3</b>		135	16-Aug-19 A	28-Dec-19					
<b>Underground Utilities Along EVA</b>		135	16-Aug-19 A	28-Dec-19					
UUZ3030	8x150 ELV / 21x150 LV / 8x200&1x100 CLP / 2x107 TELECOM / 225DIA. Stormwater Pipe	114	16-Aug-19 A	07-Dec-19					
UUZ3035	Backfill from +19.0 Mpd	69	01-Oct-19 A	08-Dec-19					
UUZ3040	FR(P) / IRP / SHP / CLWP / FSP / PWP / FLP (Pipe Installation by ATAL)	21	02-Dec-19	22-Dec-19					
UUZ3045	Backfilling to Sub-base Level	6	23-Dec-19	28-Dec-19					
<b>ZONE 4A</b>		135	02-Sep-19 A	14-Jan-20					
<b>Underground Utilities Along EVA</b>		135	02-Sep-19 A	14-Jan-20					
UUZ4005	Backfilling up to Elevation +19.0 Mpd	20	19-Nov-19 A	08-Dec-19					
UUZ4007	LV Cable Duct	105	02-Sep-19 A	15-Dec-19					
UUZ4010	225DIA. Foulwater / 2x107 Telecom	105	02-Sep-19 A	15-Dec-19					
UUZ4015	Backfill from +19.0 ~ +20.0 Mpd	7	16-Dec-19	22-Dec-19					
UUZ4020	FR(P) / REP / IRP / CLWP / HP / SHP (Pipe Installation by ATAL)	17	23-Dec-19	08-Jan-20					
UUZ4025	Backfilling to Sub-base Level	6	09-Jan-20	14-Jan-20					
<b>ZONE 4B</b>		74	17-Oct-19 A	29-Dec-19					
<b>Underground Utilities Along EVA</b>		74	17-Oct-19 A	29-Dec-19					
UUZ6040	225DIA. Foulwater / 300DIA. Stormwater / 2x107 Telecom (Remaining is the Portion East Side of EVA Road)	47	17-Oct-19 A	02-Dec-19					
UUZ6045	Backfill from +19.5 ~ +20.0 Mpd	7	03-Dec-19	09-Dec-19					
UUZ6050	FR(P) / REP / IRP / CLWP / HP / SHP (Pipe Installation by ATAL)	14	10-Dec-19	23-Dec-19					
UUZ6055	Backfilling to Sub-base Level	6	24-Dec-19	29-Dec-19					
<b>ZONE 5</b>		110	29-Sep-19 A	16-Jan-20					
<b>Underground Utilities Along EVA</b>		110	29-Sep-19 A	16-Jan-20					
UUZ5030	8x150 ELV / 14x150 LV / 2x107 Telecom / Remaining Foulwater/Stormwater Pipe	78	29-Sep-19 A	15-Dec-19					
UUZ5035	Backfilling up to Elevation +20.2 Mpd	7	16-Dec-19	22-Dec-19					
UUZ5040	SHP / CLWP / FSP / IRP / PWP / LAB / FLP (Pipe Installation by ATAL)	18	23-Dec-19	09-Jan-20					
UUZ5045	Backfilling to Sub-base Level	7	10-Jan-20	16-Jan-20					
<b>ZONE 6</b>		131	01-Oct-19 A	08-Feb-20					
<b>Underground Utilities Along EVA</b>		131	01-Oct-19 A	08-Feb-20					
UUZ5047	ELV / LV	75	01-Oct-19 A	14-Dec-19					
UUZ5048	Backfill from +19.5 ~ +20.2 Mpd	5	15-Dec-19	19-Dec-19					
UUZ6000	Emergency By-Pass Pipe	15	20-Dec-19	03-Jan-20					
UUZ6005	900 DIA. Stormwater Pipe	8	04-Jan-20	11-Jan-20					
UUZ6010	Backfilling up to Elevation +19.5 Mpd	7	12-Jan-20	18-Jan-20					
UUZ6025	REP / IRP / CLWP / FR(P) / HP / SHP (Pipe Installation by ATAL)	15	19-Jan-20	02-Feb-20					
UUZ6030	Backfilling to Sub-base Level	6	03-Feb-20	08-Feb-20					
<b>Emergency Vehicle Access Road</b>		80	29-Dec-19	17-Mar-20					
<b>ZONE 1</b>		30	07-Feb-20	07-Mar-20					
<b>Carriageway &amp; Footway</b>		25	07-Feb-20	02-Mar-20					
<b>Pipe Trench</b>		30	07-Feb-20	07-Mar-20					
<b>ZONE 2</b>		40	05-Feb-20	15-Mar-20					
<b>Carriageway &amp; Footway</b>		40	05-Feb-20	15-Mar-20					
<b>ZONE 3</b>		80	29-Dec-19	17-Mar-20					
<b>Carriageway &amp; Footway</b>		50	29-Dec-19	16-Feb-20					






DATA DATE: 30-Nov-19		LAYOUT: SW Project Phase 1 TP 4 (3M30Nov19)CODE			PAGE 5 OF 5				
Activity ID	Activity Name	At Completion Duration	Start	Finish	2019		2020		
					Nov	Dec	Jan	Feb	Mar
Pipe Trench		30	17-Feb-20	17-Mar-20					Pipe Trench
ZONE 5		35	08-Feb-20	13-Mar-20					ZONE 5
Carriageway & Footway		35	08-Feb-20	13-Mar-20					Carriageway
Pipe Trench		25	08-Feb-20	03-Mar-20					Pipe Trench
ZONE 6		25	09-Feb-20	04-Mar-20					ZONE 6
Carriageway & Footway		25	09-Feb-20	04-Mar-20					Carriageway & Footway
Landscape Works		45	07-Feb-20	22-Mar-20					Landscape Works
Landscape Works		45	07-Feb-20	22-Mar-20					Landscape Works
Landscape Works at Grade		45	07-Feb-20	22-Mar-20					Landscape Works at Grade

## **Appendix D**


### **Graphical Plots of Impact Air Quality Monitoring Results**



### 1-hr TSP at ASR1a

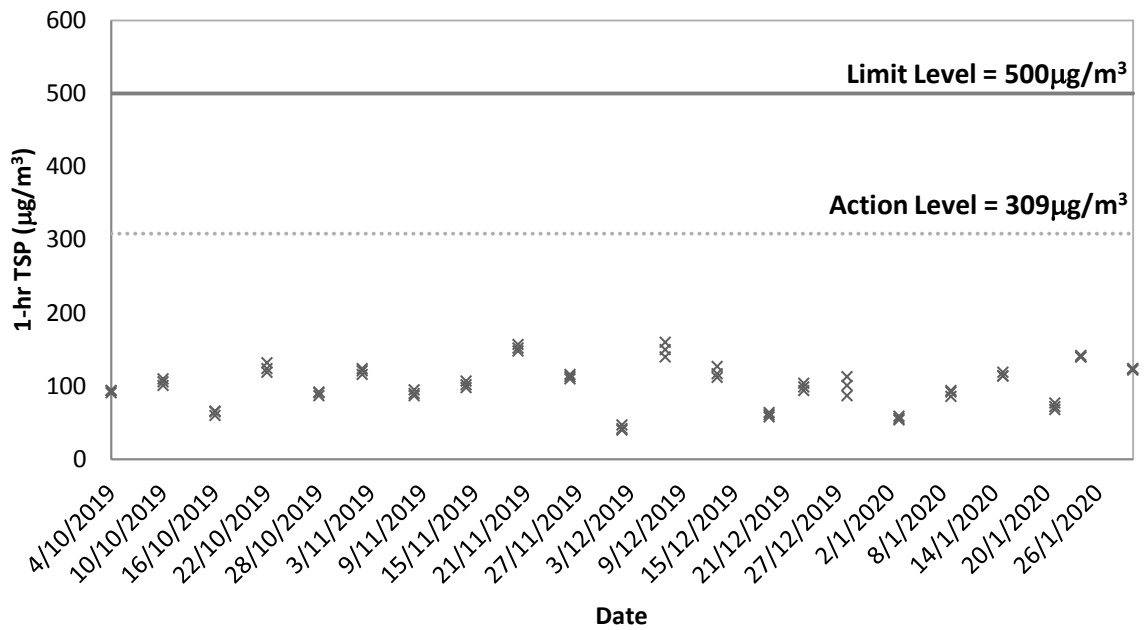


### 1-hr TSP at ASR2b

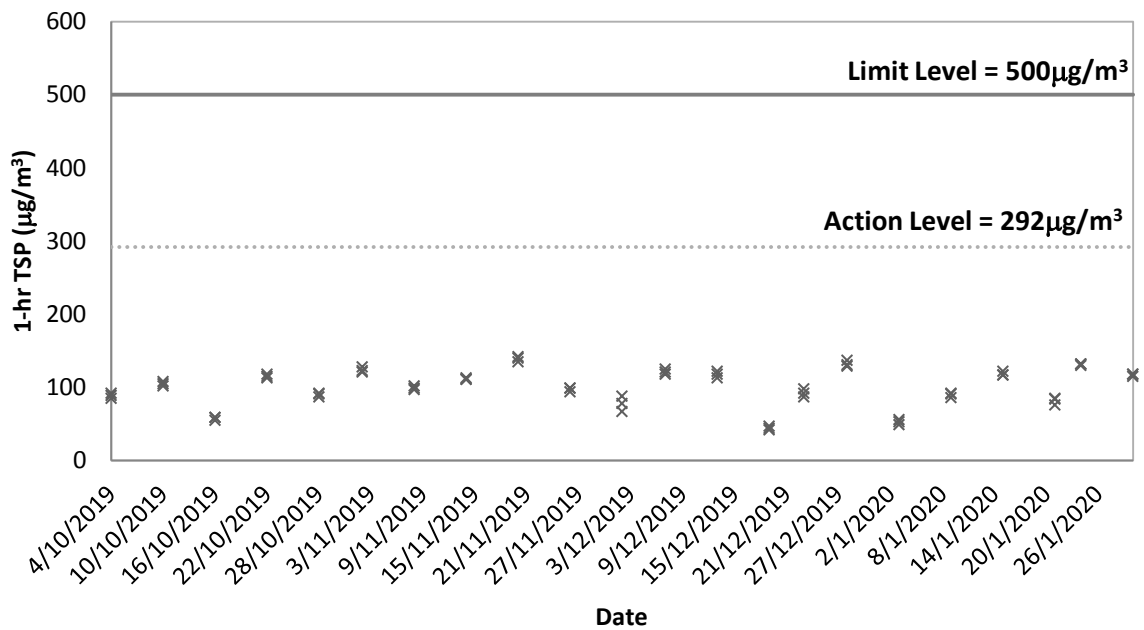




### 24-hr TSP at ASR1a

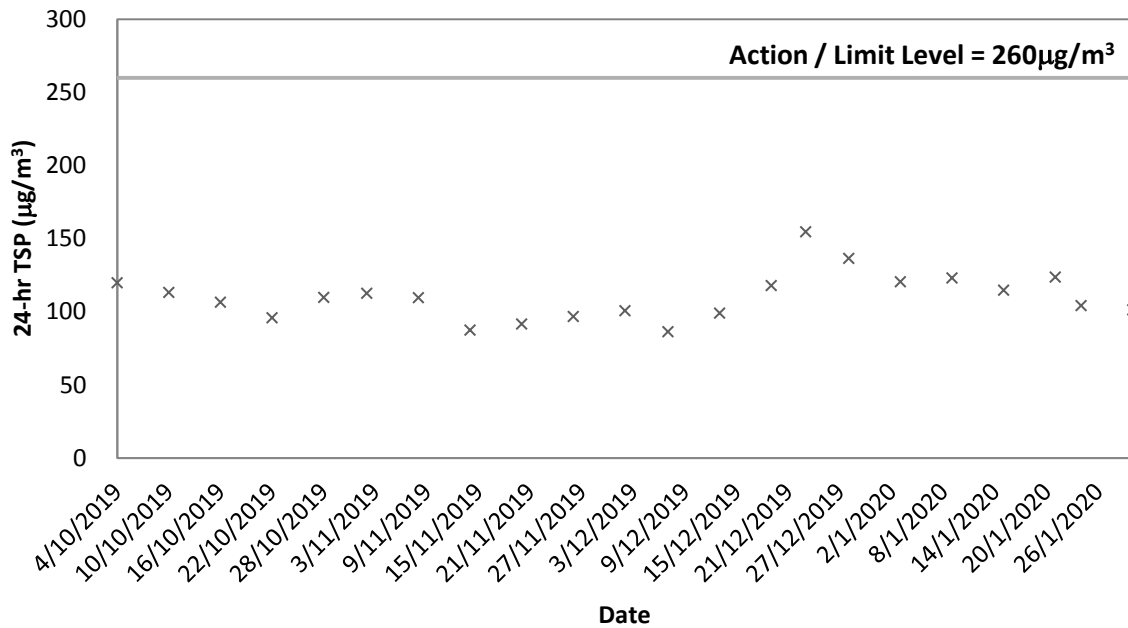

### 24-hr TSP at ASR2b

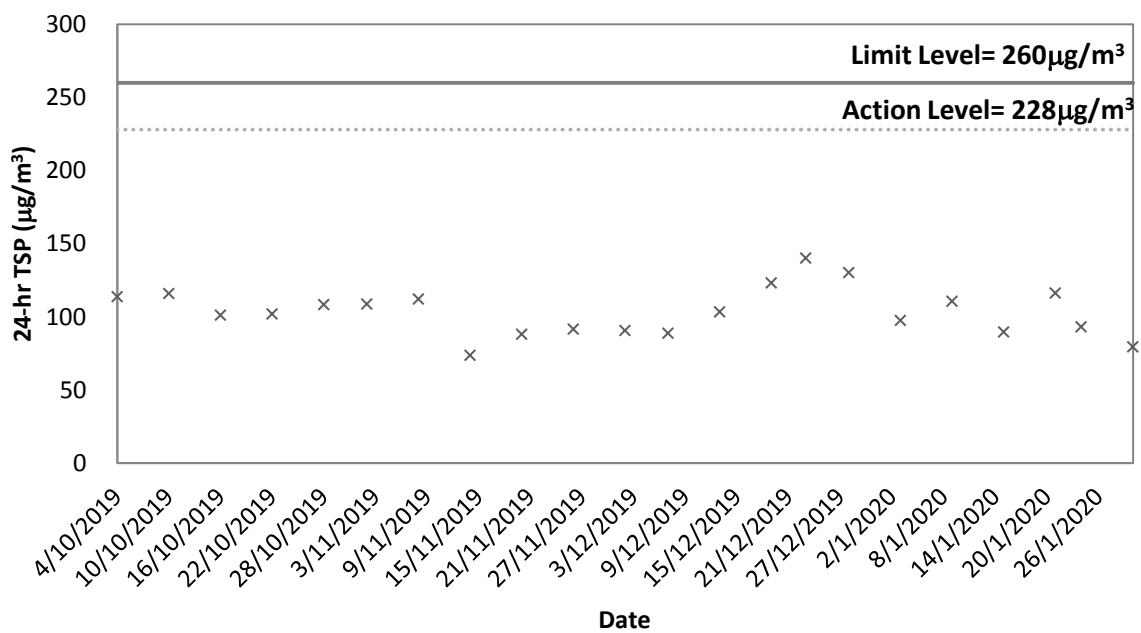


## **Appendix E**


### **Graphical Plots of Impact Noise Monitoring Data**



## Noise Level at NSR1a

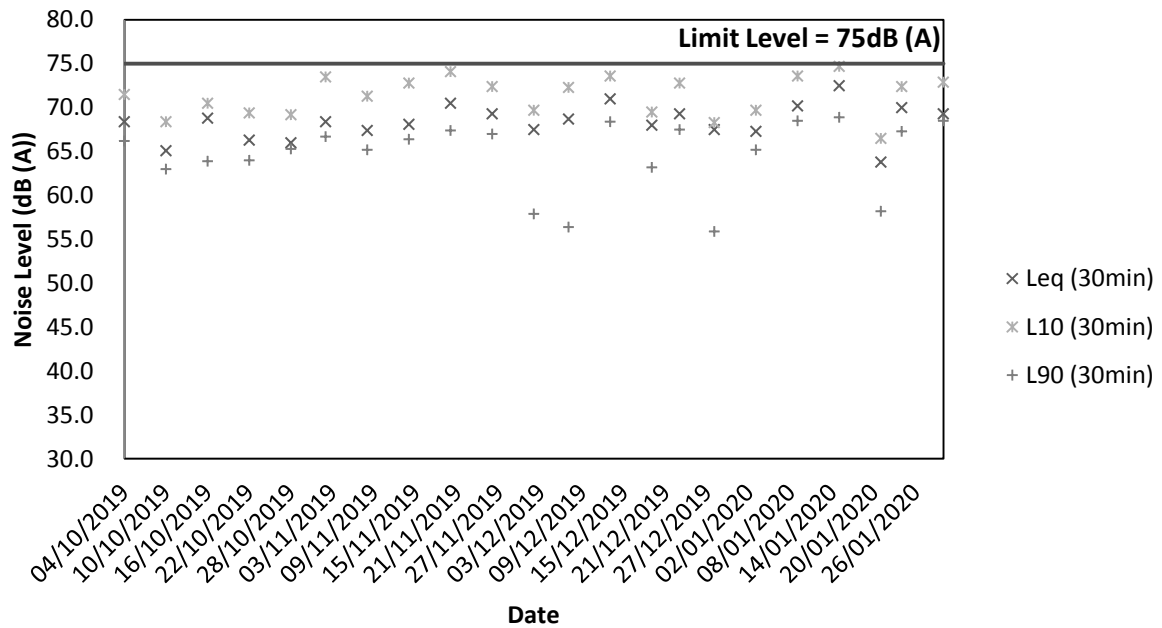


## Noise Level at NSR2b

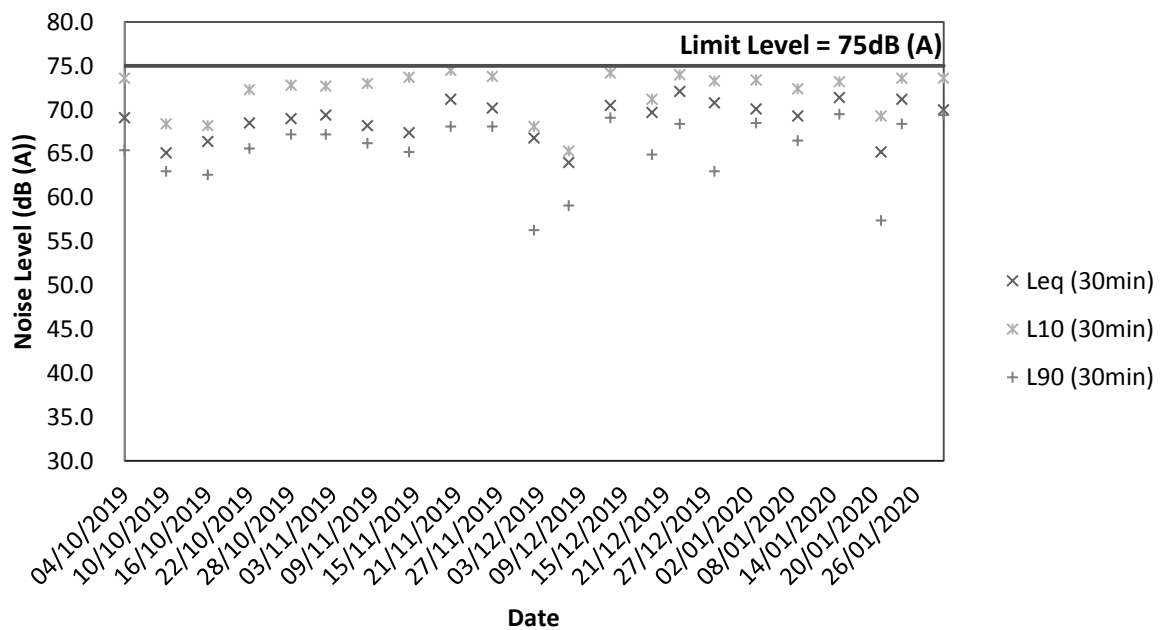


## **Appendix F**

### **Graphical Plots of Impact Water Quality Monitoring Data**


### Impact Turbidity Result

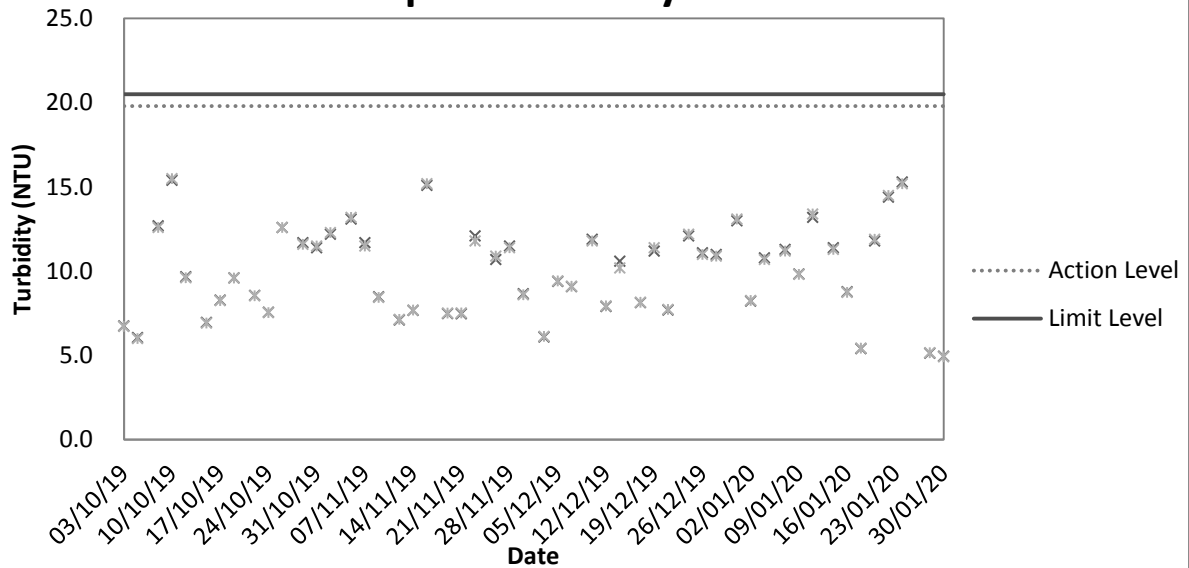

### Impact DO Result

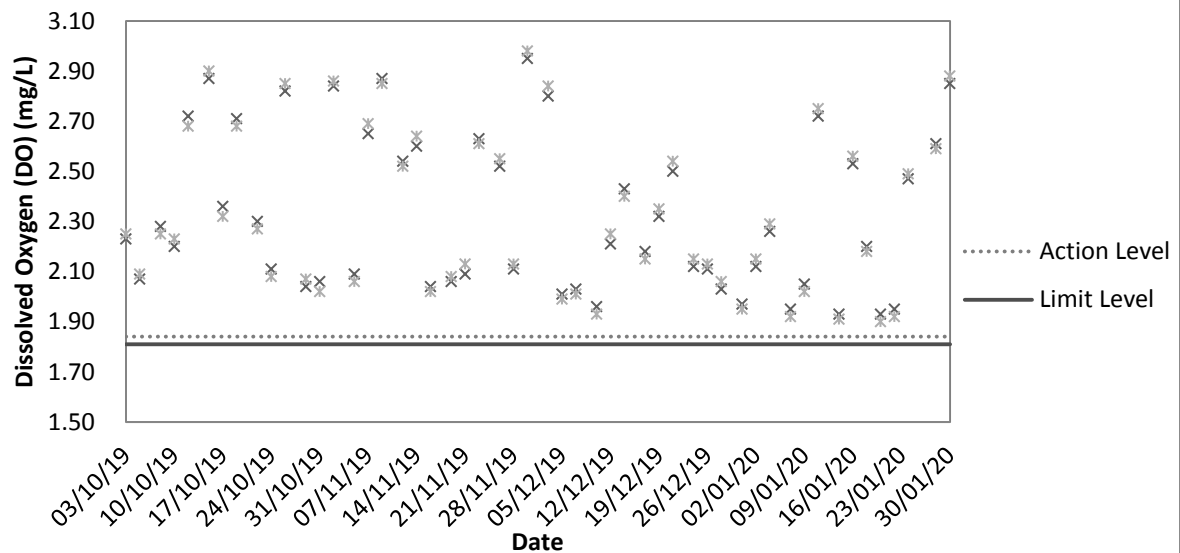

### Impact Suspended Solid (SS) Result

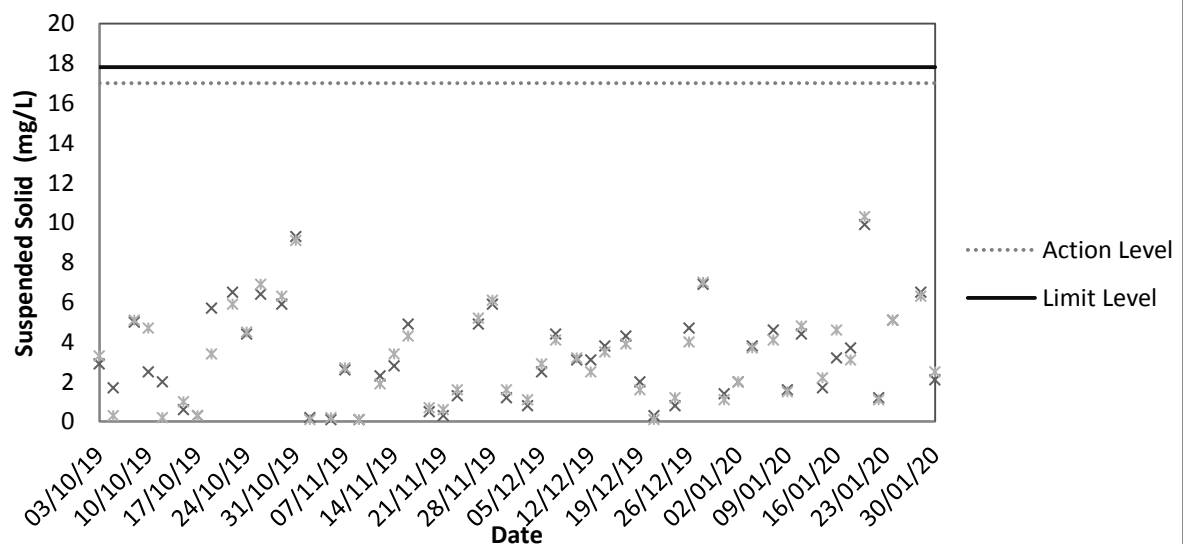





## **Appendix G**

### **Event and Action Plan**

## Event and Action Plan for Air Quality (Dust) during Construction Phase

EVENT	ACTION			
	ET	IEC	ER	CONTRACTOR
Action Level being exceeded for one sample	<ol style="list-style-type: none"> <li>1. Identify source;</li> <li>2. Inform IEC and ER;</li> <li>3. Repeat measurement to confirm finding;</li> <li>4. Increase monitoring frequency to daily.</li> </ol>	<ol style="list-style-type: none"> <li>1. Check monitoring data submitted by ET;</li> <li>2. Check Contractor's working method.</li> </ol>	<ol style="list-style-type: none"> <li>1. Notify Contractor.</li> </ol>	<ol style="list-style-type: none"> <li>1. Rectify any unacceptable practice;</li> <li>2. Amend working methods if appropriate.</li> </ol>
Action Level being exceeded for two or more consecutive samples	<ol style="list-style-type: none"> <li>1. Identify source;</li> <li>2. Inform IEC and ER;</li> <li>3. Repeat measurements to confirm findings;</li> <li>4. Increase monitoring frequency to daily;</li> <li>5. Discuss with IEC and Contractor on remedial actions required;</li> <li>6. If exceedance continues, arrange meeting with IEC and ER;</li> <li>7. If exceedance stops, cease additional monitoring.</li> </ol>	<ol style="list-style-type: none"> <li>1. Check monitoring data submitted by ET;</li> <li>2. Check Contractor's working method;</li> <li>3. Discuss with ET and Contractor on possible remedial measures;</li> <li>4. Advise the ER on the effectiveness of the proposed remedial measures;</li> <li>5. Supervise implementation of remedial measures.</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm receipt of notification of failure in writing;</li> <li>2. Notify Contractor;</li> <li>3. Ensure remedial measures are properly implemented.</li> </ol>	<ol style="list-style-type: none"> <li>1. Submit proposals for remedial actions to IEC within 3 working days of notification;</li> <li>2. Implement the agreed proposals;</li> <li>3. Amend proposal if appropriate.</li> </ol>
Limit Level being exceeded for one sample	<ol style="list-style-type: none"> <li>1. Identify source;</li> <li>2. Inform IEC, ER and EPD;</li> <li>3. Repeat measurement to confirm finding;</li> <li>4. Increase monitoring frequency to daily;</li> <li>5. Assess effectiveness of Contractor's</li> </ol>	<ol style="list-style-type: none"> <li>1. Check monitoring data submitted by ET and Contractor's working method;</li> <li>2. Discuss with Contractor on the possible mitigation measures;</li> <li>3. Review the proposed mitigation</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm receipt of notification of failure in writing;</li> <li>2. Notify Contractor;</li> <li>3. Check monitoring data and Contractor's working methods;</li> <li>4. Discuss with IEC and Contractor on potential</li> </ol>	<ol style="list-style-type: none"> <li>1. Take immediate action to avoid further exceedance;</li> <li>2. Submit proposals for remedial actions to ER within 3 working days of notification;</li> <li>3. Implement the agreed proposals;</li> <li>4. Amend proposal if</li> </ol>



EVENT	ACTION			
	ET	IEC	ER	CONTRACTOR
	remedial actions; 6. Keep EPD and ER informed of the results.	measures submitted by Contractor and advise the ER accordingly.	remedial actions; 5. Ensure remedial actions properly implemented.	appropriate.
Limit Level being exceeded for two or more consecutive samples	1. Identify source; 2. Inform IEC, ER and EPD the causes & actions taken for the exceedance s; 3. Repeat measurement to confirm findings; 4. Increase monitoring frequency to daily; 5. Investigate the causes of exceedance; 6. Arrange meeting with EPD and ER to discuss the remedial actions to be taken; 7. Assess effectiveness of Contractor's remedial actions and keep EPD and ER informed of the results; 8. If exceedance stops, cease additional monitoring.	1. Check monitoring data submitted by ET and Contractor's working method; 2. Discuss with Contractor on the possible mitigation measures; 3. Review the proposed mitigation measures submitted by Contractor and advise the ER accordingly; 4. Supervise the implementation of mitigation measures.	1. Confirm receipt of notification of failure in writing; 2. Notify Contractor; 3. Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented; 4. Discuss with IEC and the Contractor on potential remedial actions; 5. Review Contractor's remedial actions whenever necessary to assure their effectiveness; 6. If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated.	1. Take immediate action to avoid further exceedance; 2. Submit proposals for remedial actions to ER within 3 working days of notification; 3. Implement the agreed proposals; 4. Resubmit proposals if problem still not resolved; 5. Stop the relevant portion of works as determined by the ER until the exceedance is abated.

## Event and Action Plan for Construction Noise

EVENT	ACTION			
	ET	IEC	ER	CONTRACTOR
Action level	<ol style="list-style-type: none"> <li>1. Notify IEC and Contractor;</li> <li>2. Carry out investigation ;</li> <li>3. Report the results of investigation to the IEC and Contractor;</li> <li>4. Discuss with the Contractor and formulate remedial measures ;</li> <li>5. Increase monitoring frequency to check the effectiveness of mitigation measures.</li> </ol>	<ol style="list-style-type: none"> <li>1. Review the analyzed results submitted by the ET;</li> <li>2. Review the proposed remedial measures by the Contractor and advise the ER accordingly;</li> <li>3. Supervise the implementation of remedial measures.</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm receipt of notification in writing;</li> <li>2. Notify Contractor;</li> <li>3. Require Contractor to propose remedial measures for the analyzed noise problem;</li> <li>4. Ensure mitigation measures are properly implemented.</li> </ol>	<ol style="list-style-type: none"> <li>1. Submit noise mitigation proposal to IEC;</li> <li>2. Implement noise mitigation proposals.</li> </ol>
Limit level	<ol style="list-style-type: none"> <li>1. Notify IEC, ER, EPD &amp; Contractor;</li> <li>2. Identify source;</li> <li>3. Repeat measurement to confirm findings;</li> <li>4. Increase monitoring frequency;</li> <li>5. Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented;</li> <li>6. Inform IEC, ER and EPD the causes and actions taken for the exceedances;</li> <li>7. Assess the</li> </ol>	<ol style="list-style-type: none"> <li>1. Discuss amongst ER, ET, and Contractor on the potential remedial actions;</li> <li>2. Review Contractor's remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly;</li> <li>3. Supervise the implementation of remedial measures.</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm receipt of notification in writing;</li> <li>2. Notify Contractor;</li> <li>3. Require Contractor to propose remedial measures for the analyzed noise problem;</li> <li>4. Ensure mitigation measures are properly implemented;</li> <li>5. If exceedances continues, consider what portion of the work is responsible and instruct the Contractor to stop that</li> </ol>	<ol style="list-style-type: none"> <li>1. Undertake immediate action to avoid further exceedance;</li> <li>2. Submit proposals for remedial actions to IEC within 3 working days of notification;</li> <li>3. Implement the agreed proposals;</li> <li>4. Resubmit proposals if problem still not under control;</li> <li>5. Stop the relevant portion of works as determined by ER, until the exceedance</li> </ol>



	effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results; 8. If exceedance stops, cease additional monitoring.		portion of work until the exceedance is abated.	is abated.
--	--	--	---	------------

### Event and Action Plan for Water Quality

Event	Action				
	ET Leader		IEC	ER	Contractor
Action Level being exceeded by one sampling day	1. Repeat in-situ measurement to confirm findings; 2. Identify reasons for non-compliance and sources of impact; 3. Inform IEC and Contractor; 4. Check monitoring data, all plant, equipment and Contractor's working methods; 5. Discuss mitigation measures with IEC and Contractor; 6. Repeat measurement on next day of exceedance.	1. Discuss with ET and Contractor on the mitigation measures; 2. Review proposals on mitigation measures submitted by Contractor and advise the ER accordingly; 3. Assess the effectiveness of the implemented mitigation measures.	1. Discuss with IEC on the proposed mitigation measures; 2. make agreement on the mitigation measures to be implemented; 3. Assess the effectiveness of the implemented mitigation measures.	1. Inform the ER and confirm notification of the non-compliance in writing; 2. Rectify unacceptable practice; 3. Check all plant and equipment 4. Consider changes of working methods; 5. Discuss with ET and IEC and propose mitigation measures to IEC and ER; 6. Implement the agreed mitigation measures.	
Action Level being exceeded by more than two consecutive sampling days	1. Repeat in-situ measurement to confirm findings; 2. Identify reasons for non-compliance and sources of impact; 3. Inform IEC	1. Discuss with ET and Contractor on the mitigation measures; 2. Review proposals on mitigation measures submitted by Contractor	1. Discuss with IEC on the proposed mitigation measures; 2. Make agreement on the mitigation measures to be implemented;	1. Inform the ER and confirm notification of the non-compliance in writing; 2. Rectify unacceptable practice; 3. Check all plant and	



Event	Action			
	ET Leader	IEC	ER	Contractor
	and Contractor; 4. Check monitoring data, all plant, equipment and Contractor's working methods; 5. Discuss mitigation measures with IEC and Contractor; 6. Ensure mitigation measures are implemented; 7. Prepare to increase the monitoring frequency to daily; 8. Repeat measurement on next day of exceedance.	and advise the ER accordingly; 3. Assess the effectiveness of the implemented mitigation measures.	3. Assess the effectiveness of the implemented mitigation measures.	equipment; 4. Consider changes of working methods; 5. Discuss with ET and IEC and propose mitigation measures to IEC and ER within 3 working days; 6. Implement the agreed mitigation measures.
Limit Level being exceeded by one sampling day	1. Repeat in-situ measurement to confirm findings; 2. Identify reasons for non-compliance and sources of impact; 3. Inform IEC, Contractor and EPD; 4. Check monitoring data, all plant, equipment and Contractor's working methods; 5. Discuss mitigation measures with IEC, ER and Contractor; 6. Ensure mitigation measures are implemented; 7. Increase the	1. Discuss with ET and Contractor on the mitigation measures; 2. Review proposals on mitigation measures submitted by Contractor and advise the ER accordingly; 3. Assess the effectiveness of the implemented mitigation measures.	1. Discuss with IEC, ET and Contractor on the proposed mitigation measures; 2. Request Contractor to critically review the working methods; 3. Make agreement on the mitigation measures to be implemented; 4. Assess the effectiveness of the implemented mitigation measures.	1. Inform the ER and confirm notification of the non-compliance in writing; 2. Rectify unacceptable practice; 3. Check all plant and equipment; 4. Consider changes of working methods; 5. Discuss with ET, IEC and ER and propose mitigation measures to IEC and ER within 3 working days; 6. Implement the agreed mitigation measures.



Event	Action			
	ET Leader	IEC	ER	Contractor
	monitoring frequency to daily until no exceedance of Limit Level.			
Limit Level being exceeded by more than two consecutive sampling days	<ol style="list-style-type: none"> <li>1. Repeat in-situ measurement to confirm findings;</li> <li>2. Identify reasons for non-compliance and sources of impact;</li> <li>3. Inform IEC, Contractor and EPD;</li> <li>4. Check monitoring data, all plant, equipment and Contractor's working methods;</li> <li>5. Discuss mitigation measures with IEC, ER and Contractor;</li> <li>6. Ensure mitigation measures are implemented;</li> <li>7. Increase the monitoring frequency to daily until no exceedance of Limit Level for two consecutive days.</li> </ol>	<ol style="list-style-type: none"> <li>1. Discuss with ET and Contractor on the mitigation measures;</li> <li>2. Review proposals on mitigation measures submitted by Contractor and advise the ER accordingly;</li> <li>3. Assess the effectiveness of the implemented mitigation measures.</li> </ol>	<ol style="list-style-type: none"> <li>1. Discuss with IEC, ET and Contractor on the proposed mitigation measures;</li> <li>2. Request Contractor to critically review the working methods;</li> <li>3. Make agreement on the mitigation measures to be implemented;</li> <li>4. Assess the effectiveness of the implemented mitigation measures;</li> <li>5. Consider and instruct, if necessary, the Contractor to slow down or to stop all or part of the marine work until no exceedance of Limit Level.</li> </ol>	<ol style="list-style-type: none"> <li>1. Inform the ER and confirm notification of the non-compliance in writing;</li> <li>2. Rectify unacceptable practice;</li> <li>3. Check all plant and equipment;</li> <li>4. Consider changes of working methods;</li> <li>5. Discuss with ET, IEC and ER and propose mitigation measures to IEC and ER within 3 working days;</li> <li>6. Implement the agreed mitigation measures;</li> <li>7. As directed by the ER, to slow down or to stop all or part of the marine work or construction activities.</li> </ol>

## **Appendix H**

### **Implementation Schedule for Environmental Mitigation Measures (EMIS)**



Environmental Mitigation Measures	Location	Implementation Status			
		Implemented	Partially implemented	Not implemented	Not Applicable
Air Quality					
<ul style="list-style-type: none"><li>The working area for the uprooting of trees, shrubs, or vegetation or for the removal of boulders, poles, pillars or temporary or permanent structures should be sprayed with water or a dust suppression chemical immediately before, during and immediately after the operation so as to maintain the entire surface wet;</li></ul>	Site Area	√			
<ul style="list-style-type: none"><li>All demolished items (including trees, shrubs, vegetation, boulders, poles, pillars, structures, debris, rubbish and other items arising from site clearance) that may dislodge dust particles should be covered entirely by impervious sheeting or placed in an area sheltered on the top and the 3 sides within a day of demolition;</li></ul>	Site Area	√			
<ul style="list-style-type: none"><li>Vehicle washing facilities including a high pressure water jet should be provided at every discernible or designated vehicle exit point;</li></ul>	Site Entrance	√			
<ul style="list-style-type: none"><li>The area where vehicle washing takes place and the section of the road between the washing facilities and the exit point should be paved with concrete, bituminous materials or hardcores;</li></ul>	Site Exit	√			
<ul style="list-style-type: none"><li>Where a site boundary adjoins a road, street, service and or other area accessible to the public, hoarding of not less than 2.4m from ground level should be provided along the entire length of that portion of the site boundary except for a site entrance or exit;</li></ul>	Site Area	√			
<ul style="list-style-type: none"><li>Every main haul road (i.e. any course inside a construction site having a vehicle passing rate of higher than 4 in any 30 minutes) should be paved with concrete, bituminous materials, hardcores or metal plates, and kept clear of dusty materials; or sprayed with water or a dust suppression chemical so as to maintain the entire road surface wet;</li></ul>	Main Haul Road		√		
<ul style="list-style-type: none"><li>The portion of any road leading only to a construction site that is within 30m of a discernible or designated vehicle entrance or exit should be kept clear of dusty materials;</li></ul>	Site Entrance and Exit	√			
<ul style="list-style-type: none"><li>Immediately before leaving a construction site, every vehicle should be washed to remove any dusty materials from its body and wheels;</li></ul>	Site Exit	√			
<ul style="list-style-type: none"><li>Where a vehicle leaving a construction site is carrying a load of dusty materials, the load should be covered entirely by clean impervious sheeting to ensure that the dusty materials do not leak from the vehicle;</li></ul>	--	√			
<ul style="list-style-type: none"><li>The working area of any excavation or earth moving operation should be sprayed with water or a dusty suppression chemical immediately before, during and immediately after the operation so as to maintain the entire surface wet;</li></ul>	Site Area	√			
<ul style="list-style-type: none"><li>Exposed earth shall be properly treated by compaction, turfing, hydroseeding, vegetation planting or sealing with latex, vinyl, bitumen, shotcrete or other suitable</li></ul>	Site Area	√			

surface stabilizer within 6 months after the last construction activity on the construction site or part of the construction site where the exposed earth lies;					
<ul style="list-style-type: none"> <li>Any stockpile of dusty material should be either covered entirely by impervious sheeting; placed in an area sheltered on the top and the 3 sides; or sprayed with water or a dust suppression chemical so as to maintain the entire surface wet.</li> </ul>	Site Area	√			
<b>Noise</b>					
<ul style="list-style-type: none"> <li>Quiet plants should be used in order to reduce the noise impacts to protect the nearby NSRs.</li> </ul>	Site Area	√			
<ul style="list-style-type: none"> <li>Temporary and Movable Noise Barriers should be used in order to reduce the noise impact to the surrounding sensitive receivers</li> </ul>	Site Area	√			
<ul style="list-style-type: none"> <li>Intermittent noisy activities should be scheduled to minimize exposure of nearby NSRs to high levels of construction noise.</li> </ul>	Site Area	√			
<ul style="list-style-type: none"> <li>Idle equipment should be turned off or throttled down.</li> </ul>	Site Area	√			
<ul style="list-style-type: none"> <li>Construction activities should be planned so that parallel operation of several sets of equipment close to a given receiver is avoided</li> </ul>	Site Area	√			
<ul style="list-style-type: none"> <li>Construction plant should be properly maintained and operated.</li> </ul>	Site Area	√			
<b>Water Quality</b>					
<ul style="list-style-type: none"> <li>Exposed stockpiles should be covered with tarpaulin or impervious sheets before a rainstorm occurs;</li> </ul>	Site Area	√			
<ul style="list-style-type: none"> <li>The exposed soil surfaces should also be properly protected to minimize dust emission;</li> </ul>	Site Area	√			
<ul style="list-style-type: none"> <li>The stockpiles of materials should be placed in the locations away from the drainage channel so as to avoid releasing materials into the channel;</li> </ul>	Site Area	√			
<ul style="list-style-type: none"> <li>Wheel washing facilities should be provided at site exits to ensure that earth, mud and debris would not be carried out of the works areas by vehicles;</li> </ul>	Site Exit	√			
<ul style="list-style-type: none"> <li>Provision of site drainage systems and treatment facilities would be required to minimize the water pollution;</li> </ul>	Site Area	√			
<ul style="list-style-type: none"> <li>A discharge license needs to be applied from EPD for discharging effluent from the construction site;</li> </ul>	--	√			
<ul style="list-style-type: none"> <li>The treated effluent quality is required to meet the requirements specified in the discharge license;</li> </ul>	--	√			
<ul style="list-style-type: none"> <li>Provision of chemical toilets is required to collect sewage from workforce. The chemical toilets should be cleaned on a regular basis;</li> </ul>	Chemical Toilet	√			

• A licensed waste collector should be employed to clean the chemical toilets and temporary storage tank on a regular basis;	--	√			
• Illegal disposal of chemicals should be strictly prohibited;	Site Area	√			
• Registration as a chemical waste producer is required if chemical wastes are generated and need to be disposed of. The Waste Disposal Ordinance (Cap 354) and its subsidiary regulations in particular the Waste Disposal (Chemical Waste) (General) Regulation should be observed and complied with for control of chemical wastes;	Site Area	√			
• Disposal of chemical wastes should be carried out in compliance with the Waste Disposal Ordinance. The Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes published under the Waste Disposal Ordinance should be used as a guideline for handling chemical wastes;	Site Area		√		
• The impact from accidental spillage of chemicals can be effectively controlled through good management practices.	Site Area	√			
<b>Waste Management</b>					
• Segregation and storage of different types of waste in different containers, skips or stockpiles to enhance reuse or recycling of materials and their proper disposal;	Site Area	√			
• To encourage collection of aluminium cans by individual collectors, separate bins should be provided to segregate this waste from other general refuse generated by the workforce;	Site Area	√			
• Any unused chemicals or those with remaining functional capacity should be recycled;	Site Area	√			
• Prior to disposal of C&D waste, it is recommended that wood, steel and other metals be separated for re-use and/or recycling and inert waste as fill material to minimize the quantity of waste to be disposed of to landfill;	Site Area	√			
• Proper storage and site practices to minimize the potential for damage or contamination of construction materials; and	Site Area		√		
• Plan and stock construction materials carefully to minimize amount of waste generated and avoid unnecessary generation of waste.	Site Area	√			
<b>Landscape and Visual</b>					
1. Detailed tree survey should have been completed	Site Area	√			
• Trees should be transplanted to their final positions clear of the construction site	--			√	
• Erect site hoarding to protect adjacent vegetation from damage	Site Area	√			

• Regular inspections of the transplanted trees should be made to ensure the effectiveness of the hoarding	Site Area	√			
• Any topsoil excavated during the course of the works should be stored and protected on site for reuse for the restoration and screen planting works	Site Area			√	

## **Appendix I**

### **Weather Condition**

### Daily Extract of Meteorological Observations, November 2019

Day	Mean Pressure (hPa)	Air Temperature			Mean Dew Point (deg. C)	Mean Relative Humidity (%)	Total Rainfall (mm)
		Absolute Daily Max (deg. C)	Mean (deg. C)	Absolute Daily Min (deg. C)			
01	1015.7	29.3	25.7	24.0	29.3	25.7	24.0
02	1014.6	28.2	25.3	23.9	28.2	25.3	23.9
03	1013.9	28.8	25.7	23.8	28.8	25.7	23.8
04	1014.5	28.6	25.0	22.8	28.6	25.0	22.8
05	1013.4	27.4	23.9	21.6	27.4	23.9	21.6
06	1012.0	26.5	23.8	22.3	26.5	23.8	22.3
07	1013.7	26.9	23.8	21.4	26.9	23.8	21.4
08	1017.0	26.8	23.3	20.8	26.8	23.3	20.8
09	1017.6	26.0	22.7	20.4	26.0	22.7	20.4
10	1016.1	26.7	22.7	20.6	26.7	22.7	20.6
11	1014.7	26.8	23.1	20.9	26.8	23.1	20.9
12	1016.4	25.2	23.3	22.3	25.2	23.3	22.3
13	1018.3	26.8	24.1	22.3	26.8	24.1	22.3
14	1018.9	25.9	23.0	21.1	25.9	23.0	21.1
15	1016.9	25.7	22.8	21.5	25.7	22.8	21.5
16	1015.7	25.6	22.5	21.5	25.6	22.5	21.5
17	1015.0	26.5	23.4	21.4	26.5	23.4	21.4
18	1015.7	28.4	24.3	20.6	28.4	24.3	20.6
19	1018.4	22.7	20.5	17.9	22.7	20.5	17.9
20	1019.5	24.0	21.1	19.4	24.0	21.1	19.4
21	1018.9	25.2	21.7	19.2	25.2	21.7	19.2
22	1017.1	26.3	22.3	19.6	26.3	22.3	19.6
23	1016.9	26.9	23.3	21.4	26.9	23.3	21.4
24	1017.5	27.4	23.4	21.1	27.4	23.4	21.1
25	1019.6	26.6	23.8	22.4	26.6	23.8	22.4
26	1020.7	23.4	22.0	21.0	23.4	22.0	21.0
27	1020.0	24.8	22.3	21.1	24.8	22.3	21.1
28	1021.9	23.1	20.3	18.0	23.1	20.3	18.0
29	1022.3	22.6	19.7	17.0	22.6	19.7	17.0
30	1020.4	23.8	20.4	17.9	23.8	20.4	17.9
Mean/Total	1017.1	26.1	23.0	21.0	26.1	23.0	21.0

Remark(s):

1. Trace means rainfall less than 0.05 mm
2. § 1981-2010 Climatological Normal
3. The meteorological observations extracted from Hong Kong Observatory only shown the daily average and may be varied from the weather condition recorded during monitoring.

### Daily Extract of Meteorological Observations, December 2019

Day	Mean Pressure (hPa)	Air Temperature			Mean Dew Point (deg. C)	Mean Relative Humidity (%)	Total Rainfall (mm)
		Absolute Daily Max (deg. C)	Mean (deg. C)	Absolute Daily Min (deg. C)			
01	1018.3	25.5	21.5	18.8	15.5	69	0.0
02	1021.6	20.3	17.4	15.1	8.0	54	0.0
03	1023.1	20.1	16.4	13.8	4.7	46	0.0
04	1022.9	20.1	17.5	13.9	3.6	40	0.0
05	1024.8	18.3	15.3	13.1	5.7	54	1.4
06	1024.7	19.5	16.5	12.7	2.3	39	0.3
07	1024.8	19.1	16.2	13.2	2.2	39	0.0
08	1024.8	19.5	15.9	13.0	4.5	47	0.0
09	1021.8	21.7	17.4	14.7	9.7	62	0.0
10	1018.6	21.9	18.4	15.7	12.5	69	0.0
11	1018.4	24.0	19.1	16.5	11.7	64	0.0
12	1020.9	21.4	19.1	17.4	12.6	67	0.0
13	1022.4	22.0	19.2	18.0	14.6	75	0.0
14	1021.7	23.3	19.5	17.6	14.8	75	0.0
15	1020.0	20.5	19.5	18.5	16.1	81	0.0
16	1018.1	23.7	21.3	19.7	16.7	76	0.0
17	1017.7	26.2	23.2	21.2	17.7	71	0.0
18	1018.1	27.3	22.8	20.0	18.5	77	0.0
19	1019.8	21.4	19.8	18.8	17.1	84	0.1
20	1019.6	21.6	19.1	17.7	15.1	78	0.7
21	1017.8	21.9	19.3	17.0	16.5	84	1.4
22	1015.8	22.8	20.5	19.2	17.7	84	0.0
23	1016.7	21.4	20.0	18.9	17.3	85	0.0
24	1017.9	23.3	20.4	19.0	16.9	80	0.0
25	1016.4	22.9	20.1	19.0	16.6	80	0.0
26	1016.3	24.5	21.0	17.5	15.8	73	0.0
27	1020.3	21.3	18.0	15.6	11.2	65	0.0
28	1020.2	20.9	18.5	16.8	13.1	72	Trace
29	1018.3	19.6	18.8	17.9	16.8	88	9.3
30	1020.0	22.5	20.3	18.8	18.7	91	0.3
31	1024.9	20.2	19.2	18.0	16.8	86	Trace
Mean/Total	1020.2	21.9	19.1	17.0	12.9	69	13.5

Remark(s):

1. Trace means rainfall less than 0.05 mm
2. § 1981-2010 Climatological Normal
3. The meteorological observations extracted from Hong Kong Observatory only shown the daily average and may be varied from the weather condition recorded during monitoring.

### Daily Extract of Meteorological Observations, January 2020

Day	Mean Pressure (hPa)	Air Temperature			Mean Dew Point (deg. C)	Mean Relative Humidity (%)	Total Rainfall (mm)
		Absolute Daily Max (deg. C)	Mean (deg. C)	Absolute Daily Min (deg. C)			
01	1026.5	18.7	17.9	17.2	14.4	80	Trace
02	1025.2	20.4	18.3	17.4	14.4	78	0
03	1023.0	22.0	18.9	17.2	15.7	82	0
04	1020.9	22.0	19.2	17.6	16.1	83	0
05	1020.5	22.1	20.0	18.7	16.1	79	0
06	1019.3	24.0	21.0	19.5	17.0	78	0
07	1017.2	25.8	22.4	20.4	19.3	83	Trace
08	1018.5	26.0	21.9	19.7	16.4	72	0
09	1018.1	20.6	19.3	18.4	15.3	77	0
10	1016.4	21.8	19.9	18.8	16.7	82	0
11	1015.3	23.9	20.9	18.7	17.4	81	0
12	1017.1	20.3	17.9	15.7	11.2	65	0
13	1017.8	19.7	18.3	17.2	14.1	76	0
14	1019.0	21.9	19.0	17.5	14.6	76	0
15	1018.3	21.7	19.5	17.9	15.9	80	0.1
16	1017.7	22.2	19.8	18.4	17.1	84	Trace
17	1019.6	20.0	18.5	17.2	12.6	69	0
18	1019.6	21.0	18.3	17.1	13.4	73	0
19	1020.9	20.7	18.2	16.6	13.5	75	0
20	1021.9	20.6	18.0	15.7	13.5	75	0
21	1022.4	21.1	18.8	17.3	15.1	80	0
22	1019.1	23.6	20.5	18.0	17.4	82	Trace
23	1017.2	25.7	21.9	20.5	19.5	86	0
24	1018.1	23.1	21.5	20.1	19.6	89	Trace
25	1016.2	22.2	19.7	18.8	17.9	89	2.1
26	1014.9	19.2	16.5	13.7	14.0	86	12.3
27	1016.4	16.0	13.0	11.5	7.6	70	0.2
28	1018.6	16.1	13.0	10.8	6.9	66	0.1
29	1020.6	17.1	13.8	11.0	4.7	55	0
30	1021.5	18.5	14.7	11.6	2.4	44	0
31	1019.4	21.2	18.6	16.8	14.0	76	14.8
Mean/Total	1020.2	21.9	19.1	17.0	12.9	69	13.5

Remark(s):

1. Trace means rainfall less than 0.05 mm
2. § 1981-2010 Climatological Normal
3. The meteorological observations extracted from Hong Kong Observatory only shown the daily average and may be varied from the weather condition recorded during monitoring.



## **Appendix J**

### **Waste Flow Table**

DSD Contract: DC/2013/10  
Design, Build and Operate  
San Wai Sewage Treatment Works Phase 1



ATAL-Degremont-China Harbour Joint Venture

Name of Department: DSD

Year: 2019

Project: Design, Build and Operate San Wai Sewage Treatment Works - Phase 1

Contract No.: DC/2013/10

### Waste Flow Table

Month	Actual Quantities of Inert C&D Materials Generated Monthly						Actual Quantities of C&D Wastes Generated Monthly				
	Total Quantity Generated	Broken Concrete (see Note <sup>3</sup> )	Reused in the Contract (see Note)	Reused in other Projects	Disposed as Public Fill (see Note <sup>4</sup> )	Imported Fill (see Note <sup>4</sup> )	Metals	Paper/ cardboard packaging	Plastics (see Note <sup>2</sup> )	Chemical Waste	Others, e.g. general refuse
	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000 kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000 kg)
Jan	0.988	0.000	0.000	0.000	0.988	0.449	0.000	0.000	0.000	0.000	55.820
Feb	0.632	0.000	0.000	0.000	0.632	0.637	0.000	0.300	0.000	0.000	87.830
Mar	0.750	0.000	0.000	0.000	0.750	0.182	0.000	0.000	0.000	0.000	103.440
Apr	0.625	0.000	0.000	0.000	0.625	0.024	0.000	0.200	0.000	0.000	129.800
May	0.442	0.000	0.206	0.000	0.442	0.032	0.000	0.000	0.000	0.000	186.750
Jun	2.408	0.000	0.000	0.000	2.408	1.217	0.000	0.000	0.000	0.000	125.740
Jul	1.619	0.000	0.000	0.000	1.619	2.091	0.000	0.100	0.000	0.111	348.460
Aug	2.506	0.000	0.000	0.000	2.506	1.923	0.000	0.000	0.000	0.000	132.580
Sep	2.342	0.000	0.000	0.000	2.342	0.444	0.000	0.100	0.000	0.000	102.690
Oct	0.659	0.000	0.000	0.000	0.659	1.886	0.000	0.000	0.000	0.000	171.380
Nov	0.722	0.000	0.000	0.000	0.722	2.455	0.000	0.100	0.000	0.000	107.580
Dec	0.928	0.000	0.000	0.000	0.928	1.358	0.000	0.000	0.000	0.000	63.700
Total	14.621	0.000	0.206	0.000	14.621	12.698	0.000	0.800	0.000	0.111	1615.770

Notes: (1) The waste flow table shall also include C&D materials that are specified in the Contract to be imported for use at the Site.

(2) Plastics refer to plastic bottles/ containers, plastic sheets/ foam from packaging materials.

(3) Broken concrete for recycling into aggregates.

(4) Assumption: The densities of subbase, Type A, Type B, Rockfill, Soil, Mix Rock and Soil, Reclaimed Asphalt Pave, Slurry are 2.0 ton/m<sup>3</sup>; the densities of Building debris and special fill materials are 2.1 ton/m<sup>3</sup>; the densities of Broken Concrete is 2.4 ton/m<sup>3</sup>.

DSD Contract: DC/2013/10  
Design, Build and Operate  
San Wai Sewage Treatment Works Phase 1



ATAL-Degremont-China Harbour Joint Venture

Name of Department: DSD

Year: 2020

Project: Design, Build and Operate San Wai Sewage Treatment Works - Phase 1

Contract No.: DC/2013/10


### Waste Flow Table

Month	Actual Quantities of Inert C&D Materials Generated Monthly						Actual Quantities of C&D Wastes Generated Monthly				
	Total Quantity Generated	Broken Concrete (see Note <sup>3</sup> )	Reused in the Contract (see Note)	Reused in other Projects	Disposed as Public Fill (see Note <sup>4</sup> )	Imported Fill (see Note <sup>4</sup> )	Metals	Paper/ cardboard packaging	Plastics (see Note <sup>2</sup> )	Chemical Waste	Others, e.g. general refuse
	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000 kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000 kg)
Jan	0.808	0.000	0.000	0.000	0.808	0.623	0.000	0.000	0.000	0.000	51.560
Feb											
Mar											
Apr											
May											
Jun											
Jul											
Aug											
Sep											
Oct											
Nov											
Dec											
Total	0.808	0.000	0.000	0.000	0.808	0.623	0.000	0.000	0.000	0.000	51.560

- Notes: (1) The waste flow table shall also include C&D materials that are specified in the Contract to be imported for use at the Site.  
 (2) Plastics refer to plastic bottles/ containers, plastic sheets/ foam from packaging materials.  
 (3) Broken concrete for recycling into aggregates.  
 (4) Assumption: The densities of subbase, Type A, Type B, Rockfill, Soil, Mix Rock and Soil, Reclaimed Asphalt Pave, Slurry are 2.0 ton/m<sup>3</sup>; the densities of Building debris and special fill materials are 2.1 ton/m<sup>3</sup>; the densities of Broken Concrete is 2.4 ton/m<sup>3</sup>.

## **Figure 1**

### **Locations of Air Quality and Noise Monitoring Stations**

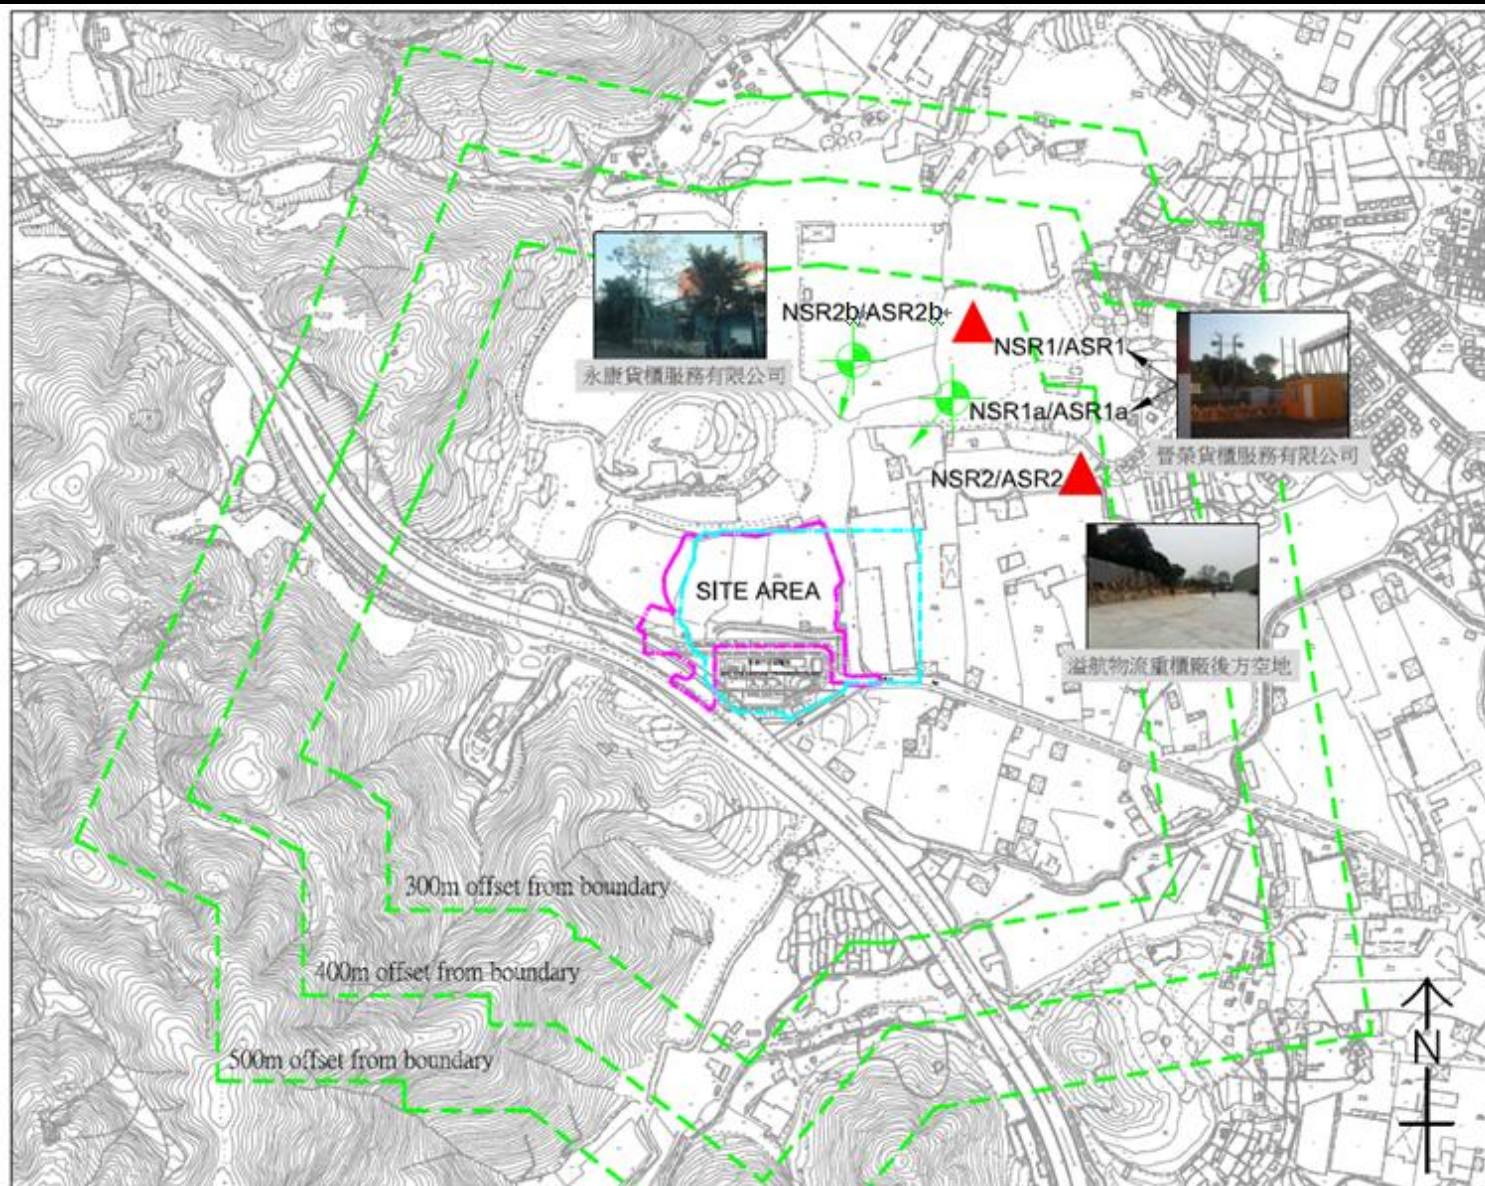

Project: Contract No. DC/2013/10 - Design, Build and Operate San Wai Sewage Treatment Works – Phase 1  
Figure 1 Locations of Air Quality and Noise Monitoring Stations

## **Figure 2**

### **Locations of Water Quality Monitoring Station**






### **Figure 3**

#### **Location Plan for the Wetsep Treatment Tank**





Legend:



Wetsep treatment tank P1a



Wetsep treatment tank P1b



Wetsep treatment tank P8

Project: Contract No. DC/2013/10 - Design, Build and Operate San Wai Sewage Treatment Works – Phase 1
Figure 3 Location Plan for the Wetsep Treatment Tank