

Maeda Corporation

---

**Castle Peak Road  
Improvement Between  
Sham Tseng and Ka  
Loon Tsuen,  
Tsuen Wan  
West Contract No.  
HY/99/18**

---

Monthly Environmental  
Monitoring and Audit  
Report  
May 2005

**Second Issue**

Maeda Corporation

**West Contract No. HY/99/18  
Castle Peak Road Improvement Between  
Sham Tseng and Ka Loon Tsuen, Tsuen Wan**

Environmental Monitoring and Audit

Monthly Environmental Monitoring and Audit Report – May 2005

June 2005

**Ove Arup & Partners Hong Kong Ltd**

Level 5, Festival Walk, 80 Tat Chee Avenue, Kowloon Tong, Kowloon, Hong Kong

Tel +852 2528 3031 Fax +852 2268 3950

[www.arup.com](http://www.arup.com)

Job number 23437



安誠工程顧問有限公司  
 香港灣仔  
 皇后大道東183號  
 合和中心47樓

**Hyder Consulting Limited**  
 47/F Hopewell Centre,  
 183 Queen's Road East,  
 Wan Chai, Hong Kong

電話: (852) 2911 2233  
 圖文傳真: (852) 2805 6028  
 電子郵件: hyder@hyder.com.hk  
 網址: www.hyderconsulting.com

Tel : (852) 2911 2233  
 Fax : (852) 2805 6028  
 Email: hyder@hyder.com.hk  
 Website: www.hyderconsulting.com

*Hyder Consulting Limited is incorporated in Hong Kong with limited liability.  
 COI Number 126012*

13 June 2005

**BY POST & FAX (2268-3950)**

Ove Arup & Partners Hong Kong Ltd.  
 Level 5 Festival Walk  
 80 Tat Chee Avenue  
 Kowloon Tong  
 Kowloon

Your  
 Ref:

Our 910-06/E05-41818  
 Ref:

For attention of: Mr. Sam Tsoi

Dear Mr. Tsoi

**Contract HY/99/18 West Contract  
 Castle Peak Road Improvement between Sham Tseng and Ka Loon Tsuen, Tsuen Wan  
 Monthly EM&A Report (May 2005)**

We refer to the electronic version of the captioned report submitted by your Mr. Angus Choi via e-mail on 8 June 2005 and subsequent revised page on 13 June 2005. We do not have further comment and endorsed the report.

Yours sincerely

**Coleman Ng  
 Independent Checker (Environmental)  
 HYDER CONSULTING LIMITED**

cc MHJV Attention: Mr. Jeff Yu (Fax: 2417-0134)  
 Maeda Attention: Mr. Derek Elliott (Fax: 2491-9678)

CN/ERY/yys



Job title	West Contract No. HY/99/18 Castle Peak Road Improvement Between Sham Tseng and Ka Loon Tsuen, Tsuen Wan	Job number 23437
Document title	Environmental Monitoring and Audit Report – May 2005	File reference
Document ref	23437-58	

Revision	Date	Filename	G:\env\project\23437\reports\Monthly\2005-02\58-May-05.doc		
First Issue	09/06/05	Description	Issue to IEC for comments		
			Prepared by	Checked by	Approved by
		Name	Fredrick Leong	Sam Tsoi	Sam Tsoi
		Signature			
Second Issue	14/06/05	Filename	G:\env\project\23437\reports\Monthly\2005-02\58-May-05-RevA.doc		
		Description	Submitted to Client with IEC verification letter		
			Prepared by	Checked by	Approved by
		Name	Fredrick Leong	Sam Tsoi	Sam Tsoi
		Signature			
		Filename			
		Description			
			Prepared by	Checked by	Approved by
		Name			
		Signature			
		Filename			
		Description			
			Prepared by	Checked by	Approved by
		Name			
		Signature			

Issue Document Verification with Document





**CONTENTS**

	Page
<b>EXECUTIVE SUMMARY</b>	<b>1</b>
<b>1. INTRODUCTION</b>	<b>3</b>
1.1 Project Background	3
1.2 Designated Project	4
1.3 Impact EM&A Requirements	4
1.4 Purpose of the Report	4
<b>2. ENVIRONMENTAL STATUS</b>	<b>5</b>
2.1 Construction Programme	5
2.2 Construction Activities of the Month	5
<b>3. SUMMARY OF EM&amp;A REQUIREMENTS</b>	<b>6</b>
3.1 Air Quality Monitoring	6
3.2 Construction Noise Monitoring	7
3.3 Water Quality (Designated Project)	8
3.4 Landscape and Visual Monitoring and Audit	14
3.5 Performance Limits and Event-Action Plans	14
3.6 Site Inspection and Environmental Complaint Handling	24
<b>4. AIR QUALITY</b>	<b>27</b>
4.1 Monitoring Parameters and Equipment	27
4.2 Methodology	27
4.3 Results and Observations	30
<b>5. NOISE</b>	<b>32</b>
5.1 Monitoring Equipment	32
5.2 Methodology	32
5.3 Results and Observations	33
<b>6. WATER QUALITY (DESIGNATED PROJECT)</b>	<b>34</b>
6.1 Water Quality Equipment	34
6.2 Methodology	34
6.3 Marine Monitoring	36
<b>7. LANDSCAPE AND VISUAL MONITORING AND AUDIT</b>	<b>37</b>
7.1 Summary of Inspection – 12 May 2005	37
7.2 Summary of Inspection – 26 May 2005	38
7.3 Tree Transplanting Survival Rate	38
7.4 Audit Schedule	38
<b>8. SITE INSPECTION, WASTE DISPOSAL, ENVIRONMENTAL COMPLAINTS, ENVIRONMENTAL LICENSES AND NON-COMPLIANCE RECORDS</b>	<b>39</b>
8.1 Site Audit Results	39
8.2 Waste Disposal	40
8.3 Complaint Record	40
8.4 Non-compliances	40
8.5 Notification of Summons and Successful Prosecution	41
8.6 Environmental Licenses	41
<b>9. REFERENCES</b>	<b>42</b>

**TABLES**

Table 3-1	TSP monitoring parameters and frequency
Table 3-2	Air quality monitoring locations
Table 3-3	Construction noise monitoring parameters and frequency
Table 3-4	Construction noise monitoring locations
Table 3-5a	Water quality monitoring locations (Original)
Table 3-5b	Water quality monitoring locations (New)
Table 3-6	Action and Limit Level for air quality
Table 3-7	Event/Action plan for air quality
Table 3-8	Action and Limit Levels for construction noise
Table 3-9	Event/Action plan for construction noise
Table 3-10	Action and Limit Levels of water quality
Table 3-11	Event/Action plan for water quality
Table 3-12	Event/Action plan for landscape and visual impact
Table 4-1	Equipment list for air quality monitoring
Table 4-2	Calibration dates of 1-hour TSP monitoring equipment
Table 5-1	Equipment list for construction noise monitoring
Table 6-1	Water quality monitoring equipment
Table 8-1	Summary of environmental concerns identified in site audits in May 2005
Table 8-2	Waste disposal quantity in May 2005
Table 8-3	Cumulative statistics on environmental complaints

**FIGURES**

Figure 1-1	Site location plan
Figure 3-1a	Monitoring locations
Figure 3-1b	Monitoring locations
Figure 3-1c	Monitoring locations
Figure 3-1d	Monitoring locations
Figure 3-1d	Monitoring locations
Figure 3-1e	Monitoring locations
Figure 3-2	Flow chart of the complaint response procedure
Figure 4-1	Graphical presentation of 1-hour TSP levels for May 2005
Figure 4-2	Graphical presentation of 24-hour TSP levels for May 2005
Figure 5-1	Graphical presentation of daytime noise levels for May 2005

## **APPENDICES**

### **APPENDIX A**

Detailed site layout plans

### **APPENDIX B**

Construction programme

### **APPENDIX C**

Monitoring schedule for May 2005 and June 2005

### **APPENDIX D**

Calibration certificates of 24-hour TSP monitoring equipment

### **APPENDIX E**

Calibration certificates of 1-hour TSP monitoring equipment

### **APPENDIX F**

Detailed air quality (1-hour TSP) monitoring results

### **APPENDIX G**

Detailed air quality (24-hour TSP) monitoring results

### **APPENDIX H**

Detailed wind monitoring data for the air quality monitoring period

### **APPENDIX I**

Calibration certificates of noise monitoring equipment

### **APPENDIX J**

Detailed noise monitoring results

### **APPENDIX K**

Landscape and visual monitoring and audit report

### **APPENDIX L**

Detail of the complaint

### **APPENDIX M**

Log record on environmental complaints

### **APPENDIX N**

Copy of new CNP

**ABBREVIATIONS AND ACTONYMS**

A/L	Action or Limit Levels
AQO	Air Quality Objectives
Arup	Ove Arup & Partners Hong Kong Limited
ASR	Area Sensitive Rating
BOD	Biochemical Oxygen Demand
B&K	Brüel & Kjør
CFM	Cubic Feet per Minute
CNP	Construction Noise Permit
CT	Contractor
C&D	Construction & Demolition
DO	Dissolved Oxygen
DGPS	Differential Global Positioning System
EA	Environmental Auditor
EIA	Environmental Impact Assessment
EM&A	Environmental Monitoring and Audit
EP	Environmental Permit
EPD	Environmental Protection Department
ER	Engineer / Engineer's Representative
ET	Environmental Team
HKPSG	Hong Kong Planning Standards and Guidelines
HKSAR	Hong Kong Special Administrative Region
HOKLAS	The Hong Kong Laboratory accreditation Scheme
HVS	High Volume Sampler
IC(E)	Independent Checker (Environment)
IEC	International Electrotechnical Commission Publications
K	Degrees Kelvin
MC	Maeda Corporation
MHJV	Mouchel Halcrow Joint Venture
NAMAS	National Measurement accreditation Service
NTU	Nephelometric Turbidity Unit
NSR	Noise Sensitive Receiver
SCFM	Standard Cubic Feet per Minute
SS	Suspended Solids
TSP	Total Suspended Particulates
Tby	Turbidity

## EXECUTIVE SUMMARY

This is the fortieth monthly environmental monitoring and audit (EM&A) report presenting the progress of environmental monitoring and audit works for the period between 1 May 2005 and 31 May 2005. Monitoring works included air quality monitoring and noise monitoring. Air quality was recorded in terms of 1-hour Total Suspended Particulates (TSP) and 24-hour TSP. Noise was measured in terms of  $L_{eq(30min)}$  with  $L_{10}$  and  $L_{90}$  measurements as references. Audit works included the weekly environmental audit and the bi-weekly landscape and visual monitoring and audit.

### Air Quality

A total of 6 sets of 3 consecutive 1-hour TSP measurements had been taken during the reporting month. The highest 1-hour TSP level was  $323.9\mu\text{g}/\text{m}^3$  recorded at G/F, Regent Height, Hong Kong Garden (WA4) on 18 May 2005 while the lowest 1-hour TSP level was  $50.2\mu\text{g}/\text{m}^3$  recorded at Car Park, Block 6, Phase 2, Sea Crest Villa (WA9) on 24 May 2005. There was no exceedance of the Action and Limit (A/L) Levels during the monitoring period.

A total of 5 sets of 24-hours TSP measurement had been taken during the reporting month. The highest 24-hour TSP level was  $100.1\mu\text{g}/\text{m}^3$  recorded at G/F, Tsing Lung Tau Temple (WA6) on 23 May 2005 while the lowest 1-hour TSP level was  $15.7\mu\text{g}/\text{m}^3$  recorded at Podium, Block 8, Phase 3, Sea Crest Villa (WA7) on 28 May 2005. There was no exceedance of the A/L Levels during the monitoring period.

### Noise

A total of 5 sets of daytime (0700 – 1900 hours) noise monitoring had been taken during the reporting month. The highest noise level was 74dB(A) recorded at No. 60-64, Tsing Lung Tau Village (WN10) on 24 May 2005 while the lowest noise level was 64dB(A) recorded at Phase 4, Sea Crest Villa (WN12) on 24 May 2005. There was no exceedance of the A/L Levels during the monitoring period.

### Marine Water Quality

No marine water quality was conducted in May 2005.

### Environmental Auditing

A total of 4 environmental site audits had been carried out on a weekly basis in May 2005. The major environmental concerns included the following issues:

- **Water quality:** cleaning of open channels, mud trails, implement wheel wash and stagnant water.
- **Air quality:** exposed slope covering.
- **Construction Noise:** no non-compliance was found.
- **Handling of waste and chemicals:** waste accumulation, cleaning up oil stain and empty oil drums.

## **Landscape and Visual**

A total of 2 landscape and visual monitoring and audits had been carried out on a biweekly basis in May 2005. The Registered Landscape Architect had recommended as follows:

- The Contractor was reminded to clear away all scattered litter, garbage, etc. as found on site, and keep the site in a tidy condition at all times.
- The Contractor was reminded to carry out more regular clearance of temporary garbage collection areas to prevent nuisance and mosquito breeding.
- The Contractor was reminded to carry out more frequent watering of the site during dry periods to prevent dust nuisance.

## **Waste Disposal**

A total of 17 loads of Construction & Demolition (C&D) waste materials and a total of 1341 loads of C&D fill materials (Public Fill) had been disposed of at WENT Landfills and at Public Filling Area in Tuen Mun respectively in May 2005. No chemical waste was disposed of in May 2005.

## **Complaint Records**

There were one environmental complaint and one enquiry received in May 2005. The first complaint is regarding the daytime noise generated from the use of power mechanical equipment during the hours between 8am to 12am near Sea Crest Villa Phase II and III on 4 May 2005. Contractor responded to the complainant that daytime construction noise generated from activities was well within the guidelines of prevailing standards and promised to look at opportunities to spread the noisy works more evenly throughout the day and make appropriate arrangement for works scheduling of the concerned works wherever practicable.

There was also an enquiry from EPD regarding the occurrence of silty water at the seashore in front of Sea Crest Villa Phase IV on 8 May 2005. It was found that no construction work was conducted on that day. It was suspected that the heavy rain might have caused the erosion of some slopes near the seaside of the retaining wall. Contractor covered the slope to prevent reoccurrence of the issue.

## **Non-compliances**

There were no non-compliances for TSP air quality and noise monitoring during the reporting month.

## **Notification of Summons and Successful Prosecution**

There was neither notification of summons nor prosecution received during the reporting month.

## **Environmental Licenses**

There was one new CNP granted during the reporting month.


## 1. INTRODUCTION

Ove Arup & Partners Hong Kong Limited (Arup) was appointed by the Contractor - Maeda Corporation (MC) as the Environmental Team (ET) for *Contract No. HY/99/18 Castle Peak Road Improvements between Sham Tseng and Ka Loon Tsuen, Tsuen Wan* (hereafter called the “Project”). Environmental parameters including air quality, construction noise, water quality and landscape & visual issues were selected for impact monitoring for the Project. The major construction period of the Project are anticipated as 45 months from December 2001 to August 2005.

### 1.1 Project Background

The Castle Peak Road improvements works consists of upgrading the existing Castle Peak Road to provide a dual two-lane carriageway of “Rural Road A” classification between Area 2, Tsuen Wan and Ka Loon Tsuen, and all associated utility, junction and pedestrian facilities. The Castle Peak Improvement project is divided into three contracts. This Environmental Monitoring and Audit (EM&A) exercise only concerns the West Contract No. HY/99/18 between Sham Tseng and Ka Loon Tsuen, Tsuen Wan. Figure 1-1 shows the site location plan and the detailed site layout plans are provided in Appendix A.

**Figure 1-1 Site location plan**

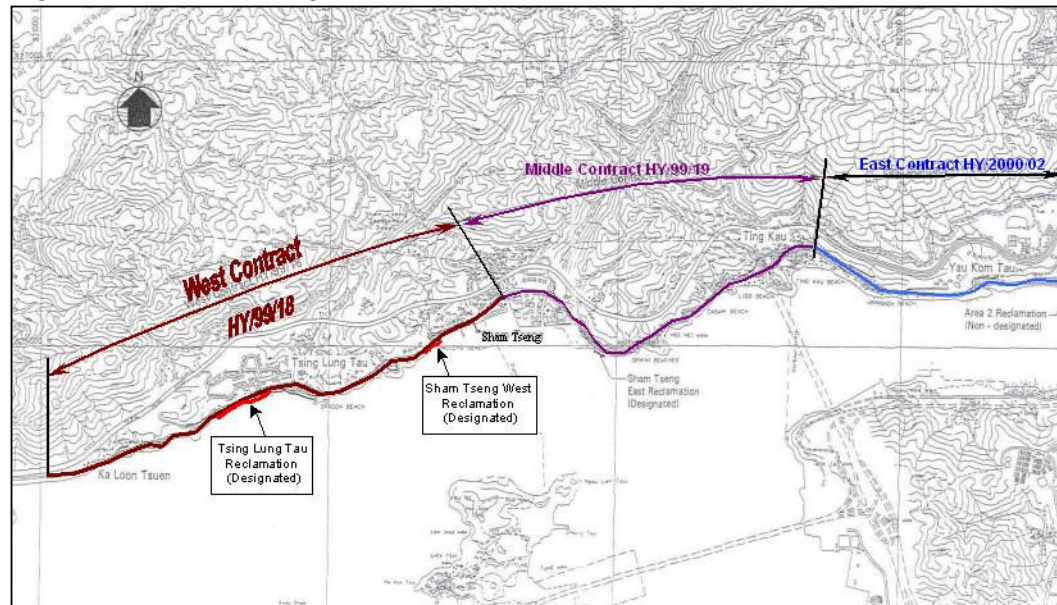



The scope of the construction work includes:

- Improvement to Castle Peak Road between Area 2 and Ka Loon Tsuen, Tsuen Wan to a dual two-lane carriageway;
- Provision of pedestrian facilities in the form of footpaths, subways, footbridges and Crossings;
- Road junction and signal design and the re-provision of access roads and connections to existing road networks;
- Construction of associated drainage and landscaping works;
- Environmental mitigation measures;
- Design and construction of watermains;
- Construction of entrusted sewerage works; and
- Dredging and reclamation (designated project – see also Section 1.2)

## **1.2 Designated Project**

The marine reclamation and the construction of the associated seawall at Tsing Lung Tau and Sham Tseng West within Contract No. HY/99/18 had been classified as designated projects under the Environmental Permits No. EP-093/2001 and EP-094/2001 respectively.

## **1.3 Impact EM&A Requirements**

The impact environmental monitoring and audit included air quality monitoring (both 1-hour and 24-hour TSP), noise, water quality, landscape and visual monitoring, and environmental audit.

## **1.4 Purpose of the Report**

The purpose of the monthly EM&A report is to provide the information on monitoring methodology, monitoring results, environmental permit status, site audit findings, recommendations and conclusions.

This is the fortieth monthly EM&A report prepared by Arup for the submission to Maeda Corporation summarising the monitoring methodology, locations, periods, frequencies, results and any observation from the air quality, noise, marine water quality, and landscape and visual monitoring and audit from 1 May to 31 May 2005.

## **2. ENVIRONMENTAL STATUS**

### **2.1 Construction Programme**

The construction work was commenced in February 2002. An up-to-date construction programme is given in Appendix B.

### **2.2 Construction Activities of the Month**

The major construction activities carried out by the Contractor (CT) in May 2005 included:

- Construction of footbridges FB01, FB02, FB12;
- Construction of noise barriers NM01, NM02, NM03 and NM04;
- Construction of culverts and outfalls;
- Construction of retaining wall RW01 and
- Construction of utility and water mains works.

The major sea works at level below +2.5mPD had been completed in July 2003 and sand placement activities at Seawall B completed on 13 August 2004.

### 3. SUMMARY OF EM&A REQUIREMENTS

Air quality, construction noise, marine water quality and landscape issues are significant environmental impacts identified for the construction period of the project. In accordance with the Project specific EM&A Manual<sup>[1]</sup>, air quality, noise, water quality, landscape and visual monitoring and audit shall be performed by an ET at all specified monitoring locations during the construction and operational stages. As instructed by the Contractor, the marine monitoring was suspended since 10 October 2003 as the major sea works at level below +2.5mPD had been completed in July 2003. Marine monitoring was resumed in August from 2 August to 27 August 2004 during and after beach reinstatement activity took place in August 2004.

The monitoring schedule for May 2005 and the tentative schedule for June 2005 are attached in Appendix C.

#### 3.1 Air Quality Monitoring

##### 3.1.1 Monitoring Parameters

Air monitoring was measured in terms of the TSP levels for both 24-hour and 1-hour periods.

##### 3.1.2 Monitoring Frequency

24-hour TSP and 1-hour TSP levels were monitored during the course of construction in accordance with the EM&A Manual. The monitoring parameters and frequency are specified in Table 3-1.

**Table 3-1 TSP monitoring parameters and frequency**

Parameters	Monitoring Frequency	Time Period	No. of measurement for each monitoring
24-hour TSP	Once every six days	0000 – 2400	1
1-hour TSP	Three times per every six days	0700 – 1900	1

##### 3.1.3 Monitoring Locations

A total of eleven locations had been specified for the air quality monitoring and they are given in Table 3-2 and presented in Figures 3-1a to 3-1d.

**Table 3-2 Air quality monitoring locations**

Air Monitoring Station No.	Location	Location description
WA1	Bayside Villas	G/F, Bayside Villas (Temporary Suspended)
WA2	Grand Bay Villas	G/F, Grand Bay Villas (Temporary Suspended)
WA3	Hong Kong Garden	G/F, Hong Kong Garden (Regent Heights)
WA4	Hong Kong Garden	G/F, Hong Kong Garden (Between Blk 1 & 2)

Air Monitoring Station No.	Location	Location description
WA5	Hong Kong Garden	G/F, Hong Kong Garden (Block 4)
WA6	Tsing Lung Tau Tin Hau Temple	G/F, Tsing Lung Tau Tin Hau Temple
WA7	Sea Crest Villa	Podium, Sea Crest Villa (Phase 4 Block 12)
WA8	Sea Crest Villa	Podium, Sea Crest Villa (Phase 3 Block 8)
WA9	Sea Crest Villa	Car Park (L3), Sea Crest Villa (Phase 2 Block 6)
WA10	Sea Crest Villa	Podium, Sea Crest Villa (Phase 1 Block 1)
WA11	Lido Garden	G/F, Carpark, Lido Garden Tower 1

**Note:** Bayside Villas (WA1) and Grand Bay Villas (WA2) are no longer the air sensitive receivers as all residents of Bayside Villas and Grand Bay Villas were moved out since September 2002. Therefore, the air quality monitoring at Bayside Villas and Grand Bay Villas were temporary suspended since October 2002 after approval from IC(E) and EPD.

### 3.1.4 Wind Monitoring

Wind monitoring data, which included the wind speed and wind directions are extracted from Hong Kong Observatory – Tsing Yi Wind Monitoring Station.

## 3.2 Construction Noise Monitoring

### 3.2.1 Monitoring Parameters

Construction noise monitoring was measured in terms of the A-weighted equivalent continuous sound pressure level ( $L_{eq}$ ).  $L_{10}$  and  $L_{90}$  will also be recorded as supplementary reference information for data auditing.

### 3.2.2 Monitoring Frequency

Construction noise measurements were required to be taken on a weekly basis in accordance with the EM&A Manual. The monitoring time periods, monitoring parameters and frequency are specified in Table 3-3.

**Table 3-3 Construction noise monitoring parameters and frequency**

Time Period (when construction activity is found)	Parameters	Monitoring Frequency	No. of Measurements for Each Monitoring
Between 0700-1900 hours on normal weekdays	$L_{eq(30\ min)}$	Once per week	1
Between 1900-2300 hours on normal weekdays	$L_{eq(5\ min)}^*$		3 (consecutive)
Between 2300-0700 hours of next day			
Between 0700-1900 hours on holidays			

**Remarks:** \* The  $L_{eq(5\ min)}$  will only be measured if construction activities are conducted in holidays and between the period of 1900 and 0700 hours during normal weekdays.

### 3.2.3 Monitoring Locations

A total of sixteen noise monitoring locations had been specified. They are given in Table 3-4 and presented in Figures 3-1a to 3-1d. The measurements were taken at a position 1m from the exterior of building façade and at a position of 1.2m above ground.

**Table 3-4 Construction noise monitoring locations**

Noise Monitoring Station No.	Location	Monitoring Point
WN1	Ka Loon Tsuen	House No.3, Ka Loon Tsuen
WN2	Ka Loon Tsuen	House No.15, Ka Loon Tsuen
<del>WN3</del>	<del>Bayside Villas</del>	<del>Upper G/F, Bayside Villas (Temporary Suspended)</del>
<del>WN4</del>	<del>Bayside Villas</del>	<del>Lower G/F, Bayside Villas (Temporary Suspended)</del>
<del>WN5</del>	<del>Grand Bay Villas</del>	<del>G/F, Grand Bay Villas (Temporary Suspended)</del>
WN6	Hong Kong Garden	G/F, Hong Kong Garden (Regent Heights)
WN7	Hong Kong Garden	G/F, Hong Kong Garden (Between Blk 1 & 2)
WN8	Hong Kong Garden	G/F, Hong Kong Garden (Block 4)
WN9	Tsing Lung Tau Village	House 1, Tsing Lung Tau Village
WN10	Tsing Lung Tau Village	House 60-64, Tsing Lung Tau Village
WN11	Villa Alfavista	G/F, Villa Alfavista
WN12	Sea Crest Villa	Podium, Sea Crest Villa (Phase 4 Block 12)
WN13	Sea Crest Villa	Podium, Sea Crest Villa (Phase 3 Block 8)
WN14	Sea Crest Villa	Car Park (L3), Sea Crest Villa (Phase 2 Block 6)
WN15	Sea Crest Villa	Podium, Sea Crest Villa (Phase 1 Block 1)
WN16	Lido Garden	G/F, Carpark, Lido Garden Tower 1

**Note:** Bayside Villas (WN3 and WN4) and Grand Bay Villas (WN5) are no longer the noise sensitive receivers as all residents of Bayside Villas and Grand Bay Villas were moved out since September 2002. Therefore, the noise monitoring at Bayside Villas and Grand Bay Villas were temporary suspended since October 2002 after approval from IC(E) and EPD.

## 3.3 Water Quality (Designated Project)

### 3.3.1 Monitoring Parameters

Water quality monitoring includes Turbidity (Tby) in the unit of NTU, Dissolved Oxygen (DO) in the unit of mg/L and Suspended Solids (SS) in the unit of mg/L. In addition to the water quality parameters, other relevant data, such as monitoring location/position, time, water depth, water temperature, salinity, DO saturation, weather conditions, sea conditions, tidal stage will be recorded including any special phenomena, work underway at the construction site, etc.

### **3.3.2 Monitoring Frequency**

Water quality monitoring during the impact stage was conducted three times per week, during mid-flood and mid-ebb tides and at sixteen designated sampling. The interval between two sets of monitoring will not be less than 36 hours except where exceedances above the Action Level or Limit Level were detected (see also Section 3.5). In these cases, the monitoring frequency will be increased.

### **3.3.3 Monitoring Locations**

A total of sixteen locations, 9 for impact and 7 for control were originally selected for marine water quality monitoring and the locations are given in Table 3-5a and presented in Figure 3-1b to 3-1e.

The new marine water quality monitoring programme, was commenced on 12 February 2003 and suspended on 10 October 2003, as agreed by the IC(E) and EPD. A total of twelve locations, 8 for impact and 4 for control were selected for the new marine water quality monitoring programme and the locations are given in Table 3-5b and presented in Figure 3-1b to Figure 3-1e.

**Table 3-5a Water quality monitoring locations (Original)**

Water Monitoring Station No.		Location	
		Eastings	Northings
Tsing Lung Tau	WW1 (Impact Station)	822260	824491
	WR1 (Control Station)	822278	824459
Tsing Lung Tau	WW2 (Impact Station)	822352	824538
	WR2 (Control Station)	822363	824505
Tsing Lung Tau	WW3 (Impact Station)	822506	824609
	WR3 (Control Station)	822518	824578
Tsing Lung Tau	WW4 (Impact Station)	822820	824640
	WR4 (Control Station)	822800	824603
Angler's Beach: Sham Tseung	WW5 (Impact Station)	823697	824937
	WR5 (Control Station)	823700	824905
Angler's Beach: Sham Tseung	WW6 (Impact Station)	823775	824991
	WW7 (Impact Station)	823797	825042
	WR6/WR7 (Control Station)	823797	824964
Angler's Beach	WW8 (Impact station)	823994	825141
	WR8 (Control Station)	824006	825107
Ma Wan Fish Culture Zone	FCZ1 (Impact Station)	823500	823870

**Table 3-5b Water quality monitoring locations (New)**


Water Monitoring Station No.		Location	
		Eastings	Northings
Tsing Lung Tau	WW1 (Impact Station)	822306	824405
	WW2 (Impact Station)	822377	824462
	WW3 (Impact Station)	822529	824500
	WW4 (Impact Station)	822775	824560
	WR-E-1234 (Control Station for Mid-Ebb Tide)	822204	824312
	WR-F-1234 (Control Station for Mid-Flood Tide)	822850	824519
Angler's Beach: Sham Tseung West	WW5 (Impact Station)	823700	824905
	WW6/7 (Impact Station)	823797	824964
	WW8 (Impact Station)	823900	825023
	WR-E-5678 (Control Station for Mid-Ebb Tide)	823590	824830
	WR-F-5678 (Control Station for Mid-Flood Tide)	823994	825034
Ma Wan Fish Culture Zone	FCZ1 (Impact Station)	823500	823870

**Figure 3-1a Monitoring locations**







**Figure 3-1b Monitoring locations**

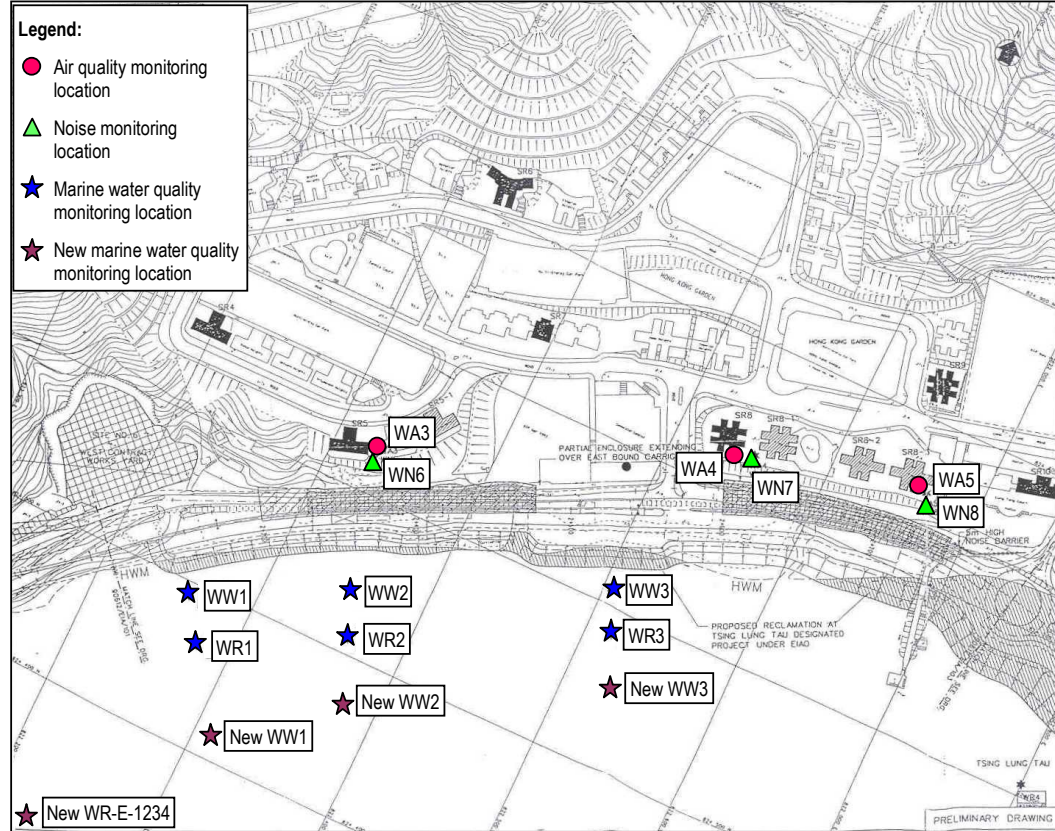


**Figure 3-1c Monitoring locations**

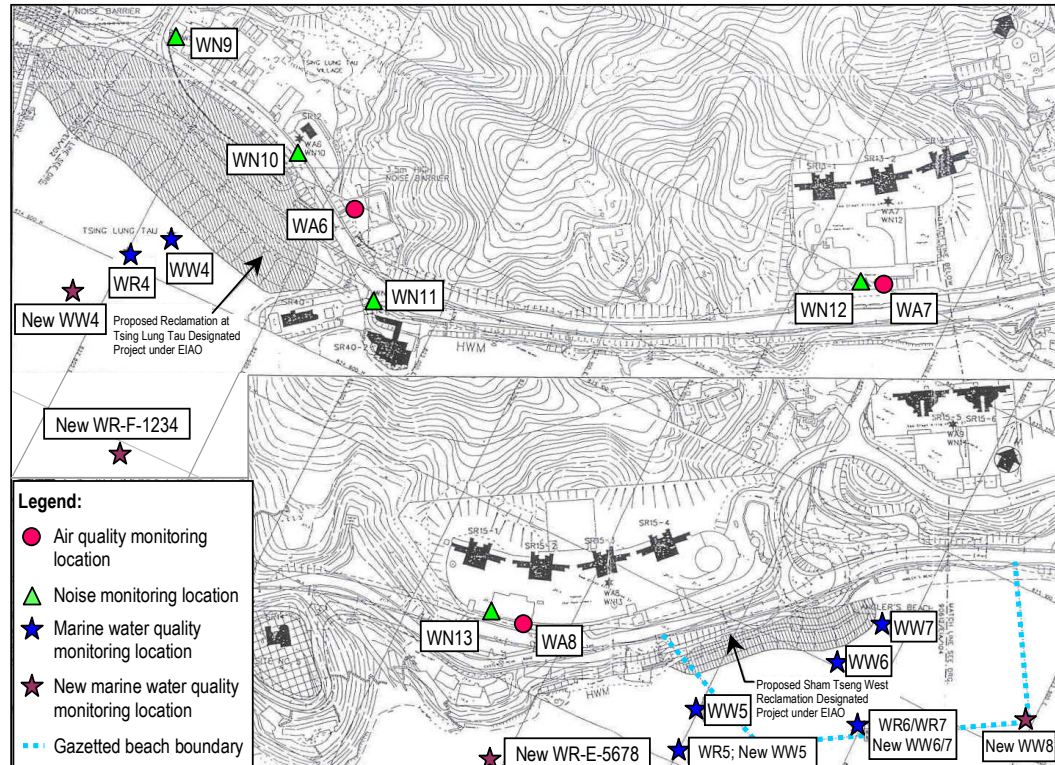

**Figure 3-1d Monitoring locations**

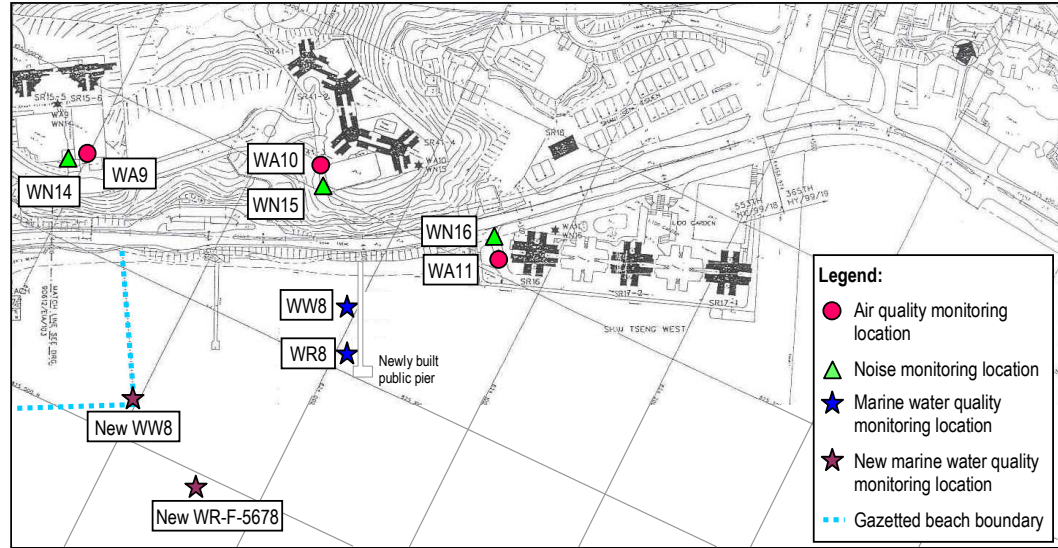

**Figure 3-1e Monitoring locations**

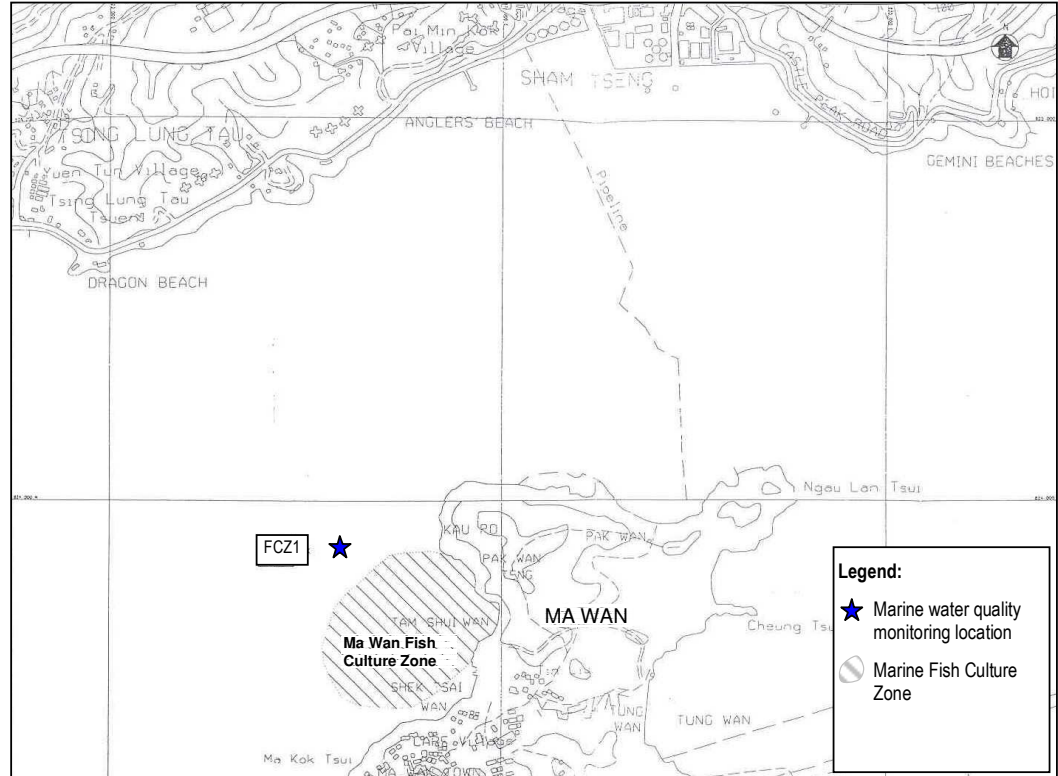

### 3.4 Landscape and Visual Monitoring and Audit

#### 3.4.1 Audit Parameters

All landscape and visual mitigation measures undertaken by both the CT and the Landscape Contractor during the construction phase and during the first year of the operational phase shall be audited by a Registered Landscape Architect, to ensure compliance with the intended aims of the mitigation measures.

#### 3.4.2 Audit Frequency

The landscape and visual monitoring and audit shall be undertaken at least once every two weeks throughout the construction period and once every two months during the operational phase.

#### 3.4.3 Audit Location

The landscape and visual monitoring and audit shall be conducted throughout the entire site area.

### 3.5 Performance Limits and Event-Action Plans

The monitoring results shall be checked against appropriate standards and requirements. A two-tier system performance limits have been established in the Project specific EM&A Manual. The “Action Level” and the “Limit Level” (A/L) are established according to the EPD requirements. ET, ER, IC(E), and CT will take corresponding actions in accordance with the Event-Action Plans if the monitoring results exceed the performance limits.

#### 3.5.1 Air Quality

The action and limit levels for air quality have been established during the baseline monitoring and are provided in Table 3-6.

**Table 3-6 Action and Limit Level for air quality**

Air Monitoring Station No.	1-hour TSP Level in $\mu\text{g}/\text{m}^3$		24-hour TSP Level in $\mu\text{g}/\text{m}^3$	
	Action Level	Limit Level	Action Level	Limit Level
WA1	350	500	187	260
WA2	362		192	
WA3	353		190	
WA4	362		187	
WA5	346		185	
WA6	362		204	
WA7	351		187	
WA8	347		188	
WA9	345		182	
WA10	352		183	
WA11	357		195	

Table 3-7 details the actions required to be carried out by different parties in case of an exceedance of performance limits being detected.

**Table 3-7 Event/Action plan for air quality**

Event	Action			
	ET Leader	IC(E)	ER	Contractor
<b>Action Level</b>				
1. Exceedance for one sample	<ol style="list-style-type: none"> <li>Identify the source.</li> <li>Inform the IC(E) and the ER.</li> <li>Repeat measurement to confirm finding.</li> <li>Increase monitoring frequency to daily.</li> </ol>	<ol style="list-style-type: none"> <li>Check monitoring data submitted by the ET Leader.</li> <li>Check Contractor's working method.</li> </ol>	<ol style="list-style-type: none"> <li>Notify the Contractor.</li> </ol>	<ol style="list-style-type: none"> <li>Rectify any unacceptable practice.</li> <li>Amend working methods if appropriate.</li> </ol>
2. Exceedance for two or more consecutive samples	<ol style="list-style-type: none"> <li>Identify the source.</li> <li>Inform the IC(E) and the ER.</li> <li>Repeat measurements to confirm findings.</li> <li>Increase monitoring frequency to daily.</li> <li>Discuss with the IC(E) and the Contractor on remedial actions required.</li> <li>If exceedance continues, arrange meeting with the IC(E) and the ER.</li> <li>If exceedance stops, cease additional monitoring.</li> </ol>	<ol style="list-style-type: none"> <li>Check monitoring data submitted by the ET Leader.</li> <li>Check the Contractor's working method.</li> <li>Discuss with the ET Leader and the Contractor on possible remedial measures.</li> <li>Advise the ER on the effectiveness of the proposed remedial measures.</li> <li>Supervisor implementation of remedial measures.</li> </ol>	<ol style="list-style-type: none"> <li>Confirm receipt of notification of failure in writing.</li> <li>Notify the Contractor.</li> <li>Ensure remedial measures properly implemented.</li> </ol>	<ol style="list-style-type: none"> <li>Submit proposals for remedial actions to IC(E) within 3 working days of notification.</li> <li>Implement the agreed proposals.</li> <li>Amend proposal if appropriate.</li> </ol>
<b>Limit Level</b>				
1. Exceedance for one sample	<ol style="list-style-type: none"> <li>Identify the source.</li> <li>Inform the ER and the EPD.</li> <li>Repeat measurement to confirm finding.</li> <li>Increase monitoring frequency to daily.</li> <li>Assess effectiveness of Contractor's remedial actions and keep the IC(E), the EPD and the ER informed of the results.</li> </ol>	<ol style="list-style-type: none"> <li>Check monitoring data submitted by the ET Leader.</li> <li>Check the Contractor's working method.</li> <li>Discuss with the ET Leader and the Contractor on possible remedial measures.</li> <li>Advise the ER on the effectiveness of the proposed remedial measures.</li> <li>Supervisor implementation of remedial measures.</li> </ol>	<ol style="list-style-type: none"> <li>Confirm receipt of notification of failure in writing.</li> <li>Notify the Contractor.</li> <li>Ensure remedial measures properly implemented.</li> </ol>	<ol style="list-style-type: none"> <li>Take immediate action to avoid further exceedance.</li> <li>Submit proposals for remedial actions to IC(E) within 3 working days of notification.</li> <li>Implement the agreed proposals.</li> <li>Amend proposal if appropriate.</li> </ol>
2. Exceedance for two or more consecutive samples	<ol style="list-style-type: none"> <li>Notify the IC(E), the ER, the EPD and the Contractor.</li> <li>Identify the source.</li> <li>Repeat measurements to confirm findings.</li> <li>Increase monitoring frequency to daily.</li> <li>Carry out analysis of the Contractor's working procedures to determine possible mitigation to be implemented.</li> <li>Arrange meeting the IC(E) and the ER to discuss the remedial actions to be taken.</li> <li>Assess effectiveness of the Contractor's remedial actions and keep the IC(E), the EPD and the ER informed of the results.</li> <li>If exceedance stops, cease additional monitoring.</li> </ol>	<ol style="list-style-type: none"> <li>Discuss amongst the ER, the ET Leader and the Contractor on the potential remedial actions.</li> <li>Review the Contractor's remedial actions whenever necessary and advise the ER accordingly.</li> <li>Supervise the implementation of remedial measures.</li> </ol>	<ol style="list-style-type: none"> <li>Confirm receipt of notification of failure in writing.</li> <li>Notify the Contractor.</li> <li>In consultation with the IC(E), agree with the remedial measures to be implemented.</li> <li>Ensure remedial measures are properly implemented.</li> <li>If exceedance continues, consider what activity of the work is responsible and instruct the Contractor to stop that activity of work until the exceedance is abated.</li> </ol>	<ol style="list-style-type: none"> <li>Take immediate action to avoid further exceedance.</li> <li>Submit proposals for remedial actions to IC(E) within 3 working days of notification.</li> <li>Implement the agreed proposals.</li> <li>Resubmit proposals if problem still not under control.</li> <li>Stop the relevant activity of works as determined by the ER until the exceedance is abated.</li> </ol>

### 3.5.2 Construction Noise Impact

The action and limit levels for the construction noise extracted from the Baseline Monitoring Report<sup>[2]</sup> are tabulated in Table 3-8.

**Table 3-8 Action and Limit Levels for construction noise**

Time Period	Action	Limit
0700 – 1900 hours on any day not being a Sunday or public holiday	When one documented complaint is received	75dB(A) <sup>(1)</sup>
19:00 – 23:00 hours on all days and 07:00 – 23:00 on general holidays (including Sundays)		55 <sup>(2)</sup> / 70 <sup>(3)</sup>
23:00 – 07:00 hours on all days		40 <sup>(2)</sup> / 55 <sup>(3)</sup>

**Remarks:**

- (1) For educational establishments the limit level shall be 70dB(A) and reduced to 65dB(A) during examination periods.
- (2) Refers to the types of Plant regulated under the Technical Memorandum on Noise from Construction Work in Designated Areas (DA-TM).
- (3) Refers to the types of Plant regulated under the Technical Memorandum on Noise Other than Percussive Piling (GW-TM).
- (4) Owing to the high background noise level recorded at WN5, WN9, and WN10, the noise impact monitoring results at these 3 locations will be corrected by its background using the following background correction equation:  $L_{eq(30min)} = 10 \log (10^{m/10} - 10^{b/10})$  as  $m = \text{Measured } L_{eq(30min)}$ ,  $b = \text{Average Baseline } L_{eq(30min)}$ . Only up to the maximum of 3dB(A) is allowed to be deducted after the background correction.

Table 3-9 details the actions required to be carried out by different parties in the case of an exceedance of performance limits being detected.



**Table 3-9 Event/Action plan for construction noise**

Event	Action			
	ET Leader	IC(E)	ER	Contractor
<b>Action Level</b>	<ol style="list-style-type: none"> <li>1. Notify the IC(E) and the Contractor.</li> <li>2. Carry out investigation.</li> <li>3. Report the results of investigation to the IC(E) and the Contractor.</li> <li>4. Discuss with the Contractor and formulate remedial measures.</li> <li>5. Increase monitoring frequency to check mitigation measures.</li> </ol>	<ol style="list-style-type: none"> <li>1. Review with analysed results submitted by the ET.</li> <li>2. Review the proposed remedial measures by the Contractor and advise the ER accordingly.</li> <li>3. Supervise the implement of remedial measures.</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm receipt of notification of failure in writing.</li> <li>2. Notify the Contractor.</li> <li>3. Require the Contractor to propose remedial measures for the analysed noise problem.</li> <li>4. Ensure remedial measures are properly implemented.</li> </ol>	<ol style="list-style-type: none"> <li>1. Submit noise mitigation proposals to IC(E).</li> <li>2. Implement noise mitigation proposals.</li> </ol>
<b>Limit Level</b>	<ol style="list-style-type: none"> <li>1. Notify the IC(E), the ER, the EPD and the Contractor.</li> <li>2. Identify the source.</li> <li>3. Repeat measurement to confirm findings.</li> <li>4. Increase monitoring frequency.</li> <li>5. Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented.</li> <li>6. Inform the IC(E), the ER, and the EPD the causes &amp; actions taken for the exceedances.</li> <li>7. Assess effectiveness of the contractor's remedial actions and keep the IC(E), the EPD and the ER informed of the results.</li> <li>8. If exceedance stops, cease additional monitoring</li> </ol>	<ol style="list-style-type: none"> <li>1. Discuss amongst the ER, the ET Leader and the Contractor on the potential remedial actions.</li> <li>2. Review the Contractor's remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly.</li> <li>3. Supervise the implementation of remedial measures.</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm receipt of notification of failure in writing.</li> <li>2. Notify the Contractor.</li> <li>3. Require the Contractor to propose remedial measures for the analysed noise problem.</li> <li>4. Ensure remedial measures are properly implemented.</li> <li>5. If exceedance continues, consider what activity of the work is responsible and instruct the Contractor to stop that activity of work until the exceedance is abated.</li> </ol>	<ol style="list-style-type: none"> <li>1. Take immediate action to avoid further exceedance.</li> <li>2. Submit proposals for remedial actions to IC(E) within 3 working days of notification.</li> <li>3. Implement the agreed proposals.</li> <li>4. Resubmit proposals if problem still not under control.</li> <li>5. Stop the relevant activity of works as determined by the ER until the exceedance is abated.</li> </ol>

### 3.5.3 Water Quality (Designated Project)

The action and limit levels for the water quality have been established in accordance with the EM&A Manual and approved by EPD on 15 October 2002. EPD and IC(E) had agreed on 10 April 2003 to apply the “Direct Comparison” method for evaluation of the marine water quality exceedance. The A/L levels had been revised in April 2003 and are presented in Table 3-10.

**Table 3-10 Action and Limit Levels of water quality**

Parameters		Monitoring Location			
		WW1 to WW8		FCZ1	
		Action Level	Limit Level	Action Level	Limit Level
<b>Mid-Ebb</b>					
DO (mg/L)	Surface & Middle	4.9	4.8	4.7	4.6
	Bottom	4.8	4.8	4.0	4.0
SS (mg/L) (Depth-averaged)		17.0	23.4	For EPD: 12.9 For AFCD: 12.9 and 120% of upstream control station's SS at the same tide of the same day	For EPD: 14.0 For AFCD: 14.0 and 130% of upstream control station's SS at the same tide of the same day
Tby (NTU) (Depth-averaged)		12.0	13.6	For EPD: 9.1 For AFCD: 9.1 and 120% of upstream control station's Tby at the same tide of the same day	For EPD: 10.3 For AFCD: 10.3 and 130% of upstream control station's Tby at the same tide of the same day.
<b>Mid-Flood</b>					
DO (mg/L)	Surface & Middle	4.3	4.2	4.5	4.4
	Bottom	4.3	4.1	4.1	4.1
SS (mg/L) (Depth-averaged)		25.3	28.7	For EPD: 23.3 For AFCD: 23.3 and 120% of upstream control station's SS at the same tide of the same day	For EPD: 25.9 For AFCD: 25.9 and 130% of upstream control station's SS at the same tide of the same day
Tby (NTU) (Depth-averaged)		25.2	31.5	For EPD: 18.7 For AFCD: 18.7 and 120% of upstream control station's Tby at the same tide of the same day	For EPD: 22.3 For AFCD: 22.3 and 130% of upstream control station's Tby at the same tide of the same day.

**Notes:** “Depth-averaged” is calculated by taking the arithmetic means of reading of all three depths.  
For DO, non-compliance of the water quality limits occurs when monitoring result is lower than the limits.

In order to better differentiate between exceedance caused by the contract works and elevated readings arising from causes unrelated to contract works, all parties had agreed to introduce a term “Reaching of Trigger Value” to represent the scenario where the A/L levels were exceeded by the “Direct Comparison” evaluation method. Upon the detection of “Reaching of Trigger Value”, an initial analysis would be



carried out to determine whether it was caused by contract works. Exceedance and non-compliance should only be recorded in case where the “Reaching of Trigger Value” was caused by the contract works.

Table 3-11 details the actions required to be carried out by different parties in the case of water quality exceedance of performance limits being detected. The revised Event/Action Plan for water quality has been endorsed by IC(E) in May 2003, and will be finalised subject to agreement with EPD.

**Table 3-11 Event/Action plan for water quality**

Event	Action			
	ET Leader	IC(E)	ER	Contractor
<b>Trigger Value</b>				
1. Trigger Value being surpassed for one sampling day	<ol style="list-style-type: none"> <li>Repeat in-situ measurement to confirm findings.</li> <li>Conduct investigation to identify the source(s) of impact.</li> <li>Check monitoring data, all plant, equipment, mitigation measures and the Contractor's working methods.</li> <li>Inform the IC(E), ER, EPD, HyD, Contractor and AFCD (if required) the investigation results.</li> <li>If exceedance is confirmed as caused by the construction works, take relevant actions as detailed in "Action Level" and "Limit Level"</li> </ol>	<ol style="list-style-type: none"> <li>If exceedance is confirmed as caused by the construction works, take relevant actions as detailed in "Action Level" and "Limit Level"</li> </ol>	<ol style="list-style-type: none"> <li>If exceedance is confirmed as caused by the construction works, take relevant actions as detailed in "Action Level" and "Limit Level"</li> </ol>	<ol style="list-style-type: none"> <li>If exceedance is confirmed as caused by the construction works, take relevant actions as detailed in "Action Level" and "Limit Level"</li> </ol>
<b>Action Level</b>				
1. Action level being exceeded by one sampling day and is caused by the construction works	<ol style="list-style-type: none"> <li>Discuss the current mitigation measures with the IC(E) and the Contractor.</li> <li>Pay attention on the monitoring results collected on the subsequent scheduled monitoring date to see if an exceedance, caused by the same or related construction works, is recurring.</li> </ol>	<ol style="list-style-type: none"> <li>Discuss with the ET Leader and the Contractor on the current mitigation measures.</li> <li>Assess the effectiveness of the current mitigation measures and advised the ER accordingly.</li> </ol>	<ol style="list-style-type: none"> <li>Discuss with the IC(E) on the current mitigation measures.</li> </ol>	<ol style="list-style-type: none"> <li>Inform the ER and confirm notification of the exceedance in writing.</li> <li>Rectify unacceptable practice.</li> <li>Check all plants and equipment.</li> <li>Consider changes of working methods.</li> <li>Discuss with the ET Leader and the IC(E) on the current mitigation measures.</li> </ol>
2. Action level being exceeded by more than one consecutive days and is cause by the construction works	<ol style="list-style-type: none"> <li>Discuss mitigation measures with the IC(E) and the Contractor.</li> <li>Ensure the proposed mitigation measures are implemented.</li> <li>Further evaluation of the monitoring results on the next scheduled monitoring day and report to all concerned parties, if the affected monitoring stations are still being affected (or are no longer affected) by the construction works.</li> <li>Prepare to increase the monitoring frequency to daily, if the Limit Level is exceeded as below.</li> </ol>	<ol style="list-style-type: none"> <li>Discuss with the ET Leader and the Contractor on the proposed mitigation measures.</li> <li>Review proposals on mitigation measures submitted by the Contractor and advised the ER accordingly.</li> <li>Assess the effectiveness of the implemented mitigation measures.</li> </ol>	<ol style="list-style-type: none"> <li>Discuss with IC(E), the ET Leader and the Contractor on the proposed mitigation measures.</li> <li>Make agreement on the proposed mitigation measures to be implemented.</li> <li>Assess the effectiveness of the implemented mitigation measures.</li> </ol>	<ol style="list-style-type: none"> <li>Inform the ER and confirm notification of the consecutive exceedance in writing.</li> <li>Rectify unacceptable practice.</li> <li>Check all plants and equipment.</li> <li>Consider changes of working methods.</li> <li>Discuss with the ET Leader and the IC(E) and propose mitigation measures to the IC(E) and the ER within 3 working day.</li> <li>Implement the agreed mitigation measures.</li> </ol>
<b>Limit Level</b>				
1. Limit level being exceeded by one sampling day and is cause by the construction works	<ol style="list-style-type: none"> <li>Discuss mitigation measures with the IC(E), the ER and the Contractor.</li> <li>Ensure the proposed mitigation measures are implemented.</li> <li>Prepare to increase the monitoring frequency to daily if further exceedances of the Limit Level are detected on the next sampling day.</li> </ol>	<ol style="list-style-type: none"> <li>Discuss with the ET Leader and the Contractor on the proposed mitigation measures.</li> <li>Review proposals on mitigation measures submitted by the Contractor and advised the ER accordingly.</li> <li>Assess the effectiveness of the implemented mitigation measures.</li> </ol>	<ol style="list-style-type: none"> <li>Discuss with IC(E), the ET Leader and the Contractor on the proposed mitigation measures.</li> <li>Request the Contractor to Critically review the working methods.</li> <li>Make agreement on the proposed mitigation measures to be implemented.</li> <li>Assess the effectiveness of the implemented mitigation measures.</li> </ol>	<ol style="list-style-type: none"> <li>Inform the ER and confirm notification of the exceedance in writing.</li> <li>Rectify unacceptable practice.</li> <li>Check all plants and equipment.</li> <li>Consider changes of working methods.</li> <li>Discuss with the ET Leader, the IC(E) and the ER, and propose mitigation measures to the IC(E) and the ER within 3 working days.</li> <li>Implement the agreed mitigation measures.</li> </ol>

Event	Action			
	ET Leader	IC(E)	ER	Contractor
2. Limit level being exceeded by more than one consecutive days and is cause by the construction works	<ol style="list-style-type: none"> <li>1. Discuss further mitigation measures with the IC(E), the ER and the Contractor.</li> <li>2. Ensure the proposed further mitigation measures are implemented.</li> <li>3. Increase the monitoring frequency to daily until no exceedance of the Limit Level.</li> </ol>	<ol style="list-style-type: none"> <li>1. Discuss with the ET Leader and the Contractor on the proposed further mitigation measures.</li> <li>2. Review proposals on further mitigation measures submitted by the Contractor and advised the ER accordingly.</li> <li>3. Assess the effectiveness of the implemented further mitigation measures.</li> </ol>	<ol style="list-style-type: none"> <li>1. Discuss with IC(E), the ET Leader and the Contractor on the proposed further mitigation measures.</li> <li>2. Request the Contractor to Critically review the working methods.</li> <li>3. Make agreement on the further mitigation measures to be implemented.</li> <li>4. Assess the effectiveness of the implemented further mitigation measures.</li> <li>5. Consider and instruct, if necessary, the Contractor to slow down or to stop all or part of the marine work until no exceedance of Limit Level.</li> </ol>	<ol style="list-style-type: none"> <li>1. Inform the ER and confirm notification of the consecutive exceedance in writing.</li> <li>2. Rectify unacceptable practice.</li> <li>3. Check all plants and equipment.</li> <li>4. Consider changes of working methods.</li> <li>5. Discuss with the ET Leader, the IC(E) and the ER, and propose further mitigation measures to the IC(E) and the ER within 3 working days.</li> <li>6. Implement the agreed further mitigation measures.</li> <li>7. As directed by the ER, slow down or stop all or part of the construction activities.</li> </ol>

### 3.5.4 Landscape and Visual

The Final Tree Survey Report<sup>[3]</sup> approved in April 2001 was adopted as the framework of the baseline landscape condition of this road section. In addition, a supplementary tree survey has been carried out in December 2001. The Supplementary Tree Survey Report (Revision A)<sup>[4]</sup> completed in March 2002 is also adopted to provide supplementary information of the baseline landscape condition of this road section.

If any non-conformity on landscape and visual issue is observed, the actions in accordance with Event/Action Plan shown in Table 3-12 shall be carried out.

**Table 3-12 Event/Action plan for landscape and visual impact**

Event	Action			
	ET Leader	IC(E)	ER	Contractor
Non-conformity on one occasion	<ol style="list-style-type: none"> <li>1. Identify Source(s).</li> <li>2. Inform the IC(E) and the ER.</li> <li>3. Discuss mitigation actions with the IC(E), the ER and the Contractor.</li> <li>4. Monitor remedial actions until rectification has been completed.</li> </ol>	<ol style="list-style-type: none"> <li>1. Check report.</li> <li>2. Check the Contractor's working method.</li> <li>3. Discuss with the ET Leader and the Contractor on possible remedial measures.</li> <li>4. Advise the ER on effectiveness of proposed remedial measures.</li> <li>5. Check implementation of remedial measures.</li> </ol>	<ol style="list-style-type: none"> <li>1. Notify the Contractor.</li> <li>2. Ensure remedial measures are properly implemented.</li> </ol>	<ol style="list-style-type: none"> <li>1. Amend working method.</li> <li>2. Rectify damage and undertaken any necessary replacement.</li> </ol>
Repeated Non-conformity	<ol style="list-style-type: none"> <li>1. Identify Source(s).</li> <li>2. Inform the IC(E) and the ER.</li> <li>3. Increase monitoring frequency</li> <li>4. Discuss mitigation actions with the IC(E), the ER and the Contractor.</li> <li>5. Monitor remedial actions until rectification has been completed.</li> <li>6. If exceedance stops, cease additional monitoring</li> </ol>	<ol style="list-style-type: none"> <li>1. Check monitoring report</li> <li>2. Check the Contractor's working method</li> <li>3. Discuss with the ET Leader and the Contractor on possible remedial measures.</li> <li>4. Advise the ER on effectiveness of proposed remedial measures.</li> <li>5. Supervise implementation of remedial measures.</li> </ol>	<ol style="list-style-type: none"> <li>1. Notify the Contractor.</li> <li>2. Ensure remedial measures are properly implemented.</li> </ol>	<ol style="list-style-type: none"> <li>1. Amend working method.</li> <li>2. Rectify damage and undertaken any necessary replacement.</li> </ol>

## 3.6 Site Inspection and Environmental Complaint Handling

### 3.6.1 Site Inspection Frequency and Areas Covered

Regular site inspections shall be carried out on a weekly basis. The areas of inspection cover the different environmental impacts, such as air, noise, water and waste, and their pollution controls and mitigation measures for both within and outside the site area. Site inspection for landscape and visual impact shall be carried out on a bi-weekly basis.

Ad hoc site inspection will be carried out if significant environmental non-compliance is identified. Inspections may also be carried out subsequent to receipt of any environmental complaints, or as part of the investigation work, as specified in the Event-Action Plans.

### 3.6.2 Site Inspection Procedures

- a) The CT and/or ER will advise the Environmental Auditor (EA) for all information on any environmental related aspects.
- b) The EA will conduct discussion with the CT and/or ER to sort out and forecast any potential environmental impact.
- c) The EA will conduct a site walk with the CT and/or ER, particularly the areas with extensive construction works.
- d) The EA will conduct inspection for the main environmental facilities and measures such as the wheel washing facilities located at the site exits, water spraying truck, temporary noise barrier, and the internal noise-reducing measures of the heavy equipment etc, to ensure that these environmental facilities operate normally and effectively.
- e) The EA will fill up a site inspection checklist during the site inspection for recording of any special observations.
- f) The EA will conduct post-discussion with the CT and/or ER for the establishment of additional/special measures if any non-conformance is found. The completion date for such additional measures will be confirmed during the post-discussion.
- g) The EA will propose a reasonable timeframe together with the CT and/or ER, for the preparation of the proposal for the remediation of environmental non-compliance.
- h) The completed site inspection checklist will be signed by the EA, the CT and/or ER, for reference and for taking actions in accordance with the agreed procedures, reporting systems and time frame.

### 3.6.3 Environmental Complaints


In accordance with the EM&A Manual, environmental complaints will be referred to the ET for initiation of the complaint investigation procedures. The ET will undertake the following procedures upon receipt of the complaints:

- a) The ET will record the details of the complaint and the date of receipt onto the complaint database, and inform ER immediately.
- b) The ET will perform compliant investigation to determine its validity, and to assess whether the source of the problem is due to work activities.
- c) The ER will instruct the CT to identify mitigation measures in consultation with the ET, if the complaint is valid and due to works.
- d) The ET will liaise with the CT on their mitigation measure proposals and implementation, if required.
- e) The ET will conduct review of the CT's response on the identified mitigation measures, and of the updated situation.
- f) The ET will submit interim report to EPD if the complaint is received via EPD. The interim report will clearly state the status of the complaint investigation and the follow-up action within the time frame assigned by EPD.
- g) The ET will undertake additional monitoring and audit to verify the situation if necessary, and ensure that any valid reason for complaint does not recur.
- h) The ET will report on the investigation results and the subsequent actions to the source of complaint for responding to the complainant (If the source of complaint is via EPD, the results will be reported within the time frame assigned by EPD).
- i) The ET will record the details of the complaint, investigation, subsequent actions and results in the monthly EM&A reports.

During the complaint investigation work undertaken by the ET, the CT and ER shall cooperate with the ET on providing all the necessary information and assistance for completion of the investigation. If mitigation measures are identified as necessary after the investigation, the CT shall promptly carry out the required mitigation to the satisfaction of ET. The ER shall ensure that the CT has carried out such identified measures.

A flow chart of the complaint response procedures is shown in Figure 3-2 for reference.

**Figure 3-2 Flow chart of the complaint response procedure**

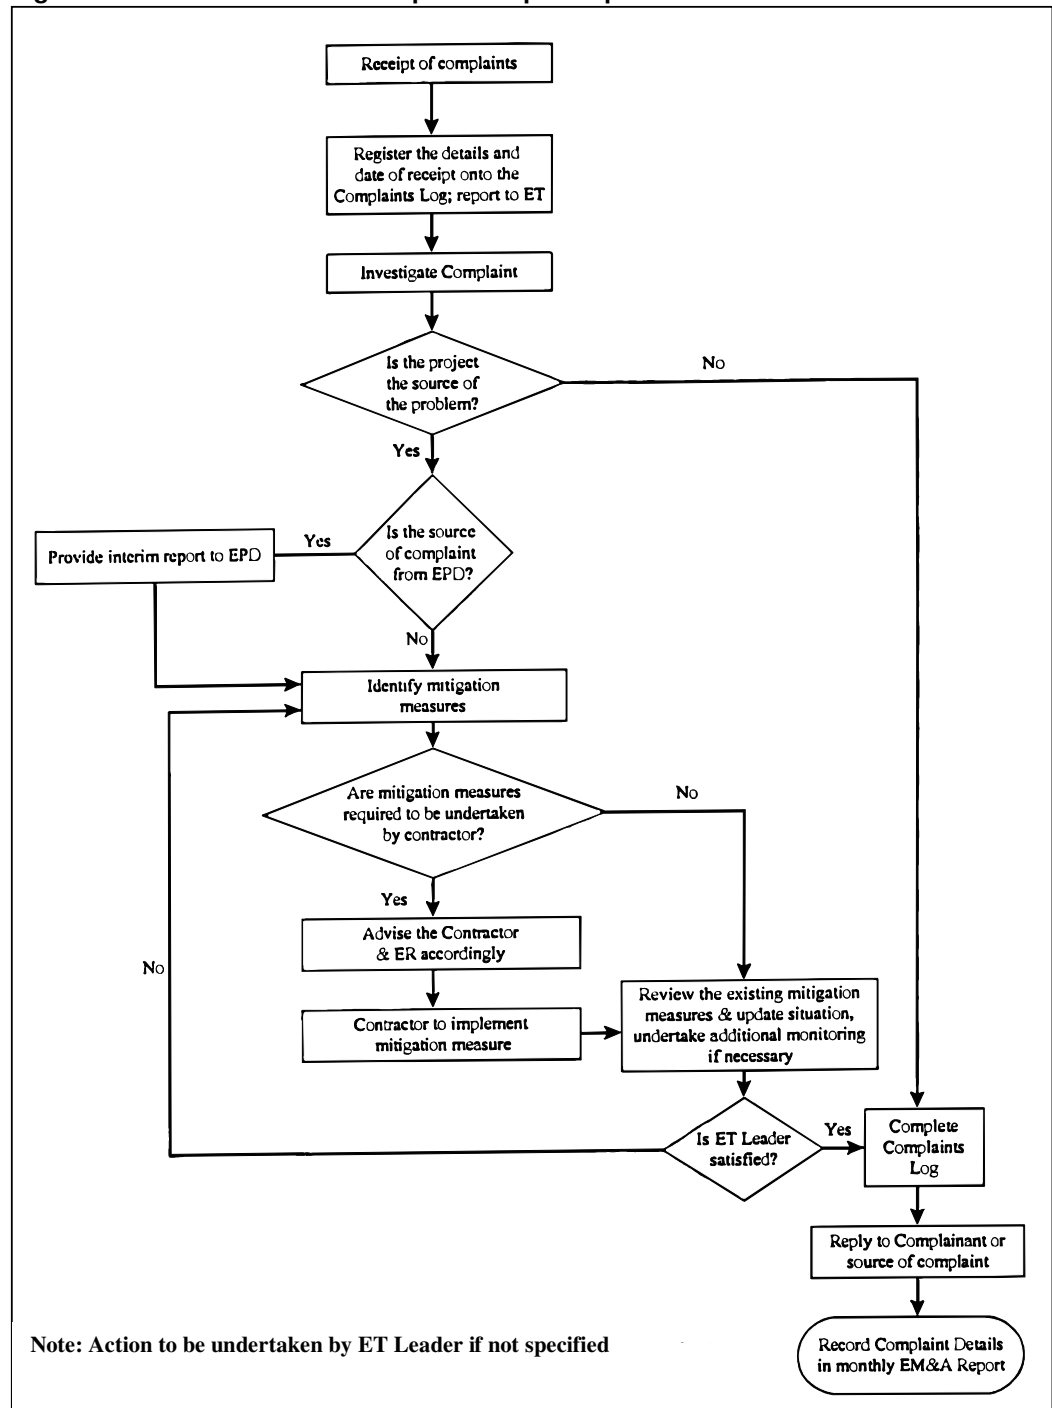

## 4. AIR QUALITY

### 4.1 Monitoring Parameters and Equipment

Impact air quality monitoring was conducted in terms of both 1-hour and 24-hour TSP using a direct reading meter, MIE Data-RAM Portable Real Time Aerosol Monitor (MIE) and High Volume Sampler (HVS) respectively. Table 4-1 shows the equipment list for air quality monitoring.

**Table 4-1 Equipment list for air quality monitoring**

Equipment	Manufacturer & Model No.	Measurement Parameter	Qty.
High Volume Sampler	GS-2310105 & TE-5170	24-hour TSP	11
Fibreglass Filter	G810		--
HVS Calibration Kit	GMW-2535		1
Photometric Aerosol Monitor	MIE <i>personal</i> /DataRAM	1-hour TSP	10
Hand Held Barometer	Cole-Parmer EB833	Pa, Temperature	2

### 4.2 Methodology

#### 4.2.1 1-hour TSP Monitoring

The procedure for 1-hour TSP monitoring is described as follows:

The MIE monitor was switched on by pressing the ON/OFF button. The NEXT button was pressed to select Run or Ready mode.

The NEXT button was pressed subsequently to check the following settings:

- i. data logging function: on
- ii. log period: 5 minutes
- iii. tag number: storage
- iv. analogue output: 0-4.000mg/m<sup>3</sup>
- v. calibration factor: 1.0
- vi. averaging time: 10s
- vii. battery charge:  $\geq 50\%$
- viii. remaining memory:  $\geq 10\%$

The monitoring was started by pressing ENTER. The real-time concentration would display “CONC” and the time-averaged concentration would display “TWA”.

The monitoring was stopped by pressing EXIT and ENTER buttons.



The date and start time, weather, site condition and the downloaded monitoring results were recorded on specified field record sheet.

#### 4.2.2 24-hour TSP Monitoring

24-hour TSP by using a High Volume Sampler (HVS). The HVS should be in compliance with the following specifications:

- 0.6 – 1.7 m<sup>3</sup>/min (20 – 60SCFM);
- equipped with a timing/control device with +/- 5 minutes accuracy for 24 hours operation;
- installed with elapsed time meter with +/- 2 minutes accuracy for 24 hours operation;
- capable of providing a minimum exposed area of 406 cm<sup>2</sup>(63in<sup>2</sup>);
- flow control accuracy: +/-2.5% deviation over 24-hr sampling period;
- equipped with a shelter to protect the filter and sampler;
- incorporated with an electronic mass flow rate controller or other equivalent devices;
- equipped with a flow recorder for continuous monitoring;
- provided with a peaked roof inlet;
- incorporated with a manometer;
- able to hold and seal the filter paper to the sampler housing at horizontal position;
- easy to change the filter; and
- capable of operating continuously for a 24-hour period.

#### 4.2.3 Maintenance and Calibration

The HVS and their accessories were frequently checked and maintained in accordance with the manufacturer's operation & maintenance manual. Maintenance includes the checking of the supporting screen and the gasket, and routine replacement of motor carbon brushes for the blower motor. The power cords and power supply were checked each time before sampling to ensure proper operation.

The HVS are calibrated at 2-month intervals using GMW-2535 Calibration Kit. The calibration kit will be re-calibrated by the manufacturer after one year of use. The calibration certificates of the HVS and the calibration kit are provided in Appendix D. The next calibration will be conducted on or before 20 June 2005 for the HVS and 10 February 2006 for the GMW-2535.

The MIE monitor and its accessories were frequently checked and maintained in accordance with the manufacturer's operation & maintenance manual to ensure proper operation. Maintenance includes the checking of batteries, zero and sensitive adjustment and filter replacement.

The MIE monitor is returned to the manufacturer for calibration bi-annually. The calibration certificates are provided in Appendix E. The next calibration dates for the MIE monitors are given in Table 4-2.

**Table 4-2 Calibration dates of 1-hour TSP monitoring equipment**

1-hour TPS monitoring equipment	Serial number	Last calibration date	Next calibration date (on or before)
MIE Data-RAM Portable Real Time Aerosol Monitor	4496	25-Sep-03	25-Sep-05
	4715	21-Nov-03	21-Nov-05
	4615	15-Jan-04	15-Jan-06
	4705	15-Jan-04	15-Jan-06
	4492	27-Jul-04	27-Jul-06
	4736	27-Jul-04	27-Jul-06
	3809	06-Oct-04	06-Oct-06
	3893	06-Oct-04	06-Oct-06
	4243	06-Oct-04	06-Oct-06
	4239	03-Feb-05	03-Feb-07

### 4.3 Results and Observations

#### 4.3.1 Weather conditions and other factors

The weather condition varied from fine to cloudy during the air quality monitoring period in May 2005.

The construction site had been under normal operation during the air quality monitoring period and no unusual operation or dust from other source was observed.

#### 4.3.2 Summary Results


##### 1-hour TSP

A total of 6 sets of 3 consecutive 1-hour TSP measurements had been taken on 3, 6, 12, 18, 24 and 30 May 2005.

The highest 1-hour TSP level was 323.9 $\mu\text{g}/\text{m}^3$  recorded at G/F, Regent Height, Hong Kong Garden (WA4) on 18 May 2005 while the lowest 1-hour TSP level was 50.2 $\mu\text{g}/\text{m}^3$  recorded at Car Park, Block 6, Phase 2, Sea Crest Villa (WA9) on 24 May 2005. There was no exceedance of the A/L Levels during the monitoring period.

The detailed monitoring results of 1-hour TSP are given in Appendix F and the 1-hour TSP level at each monitoring location are plotted and presented in Figure 4-1.

Figure 4-1 Graphical presentation of 1-hour TSP levels for May 2005

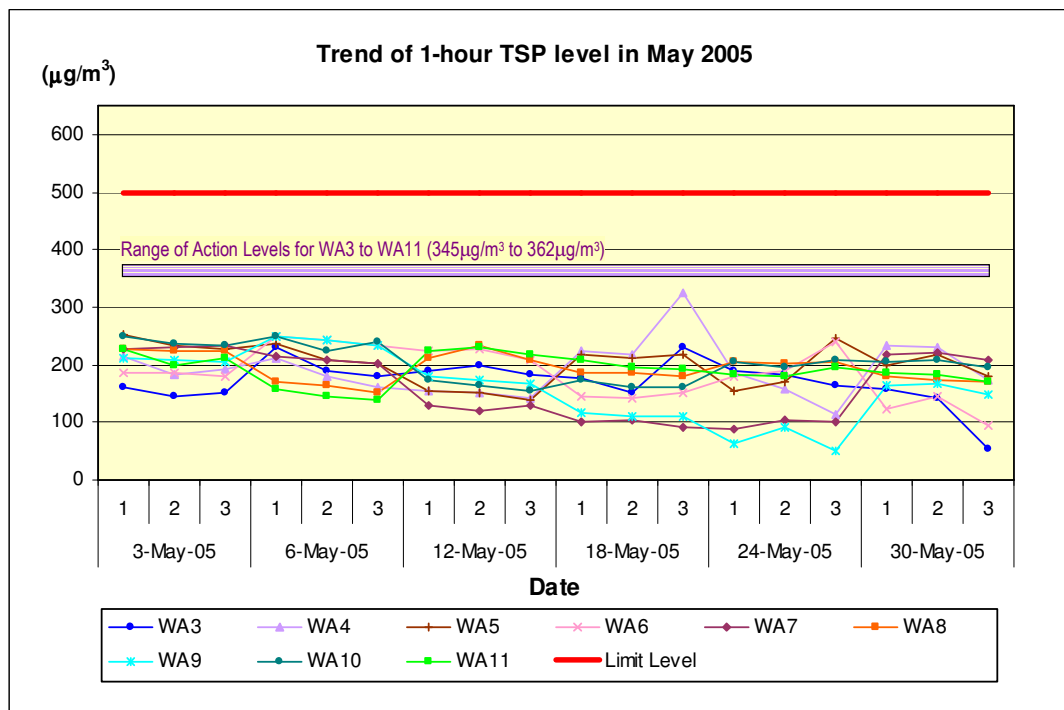


**24-hour TSP**

A total of 5 sets of 24-hour TSP measurement had been taken on 6, 11, 17, 23 and 28 May 2005.

The highest 24-hour TSP level was 100.1 $\mu\text{g}/\text{m}^3$  recorded at G/F, Tsing Lung Tau Temple (WA6) on 23 May 2005 while the lowest 1-hour TSP level was 15.7 $\mu\text{g}/\text{m}^3$  recorded at Podium, Block 8, Phase 3, Sea Crest Villa (WA7) on 28 May 2005. There was no exceedance of the A/L Levels during the monitoring period.

The detailed monitoring results of 24-hour TSP are given in Appendix G and the 24-hour TSP level at each monitoring location are plotted and presented in Figure 4-2.

**Figure 4-2 Graphical presentation of 24-hour TSP levels for May 2005**

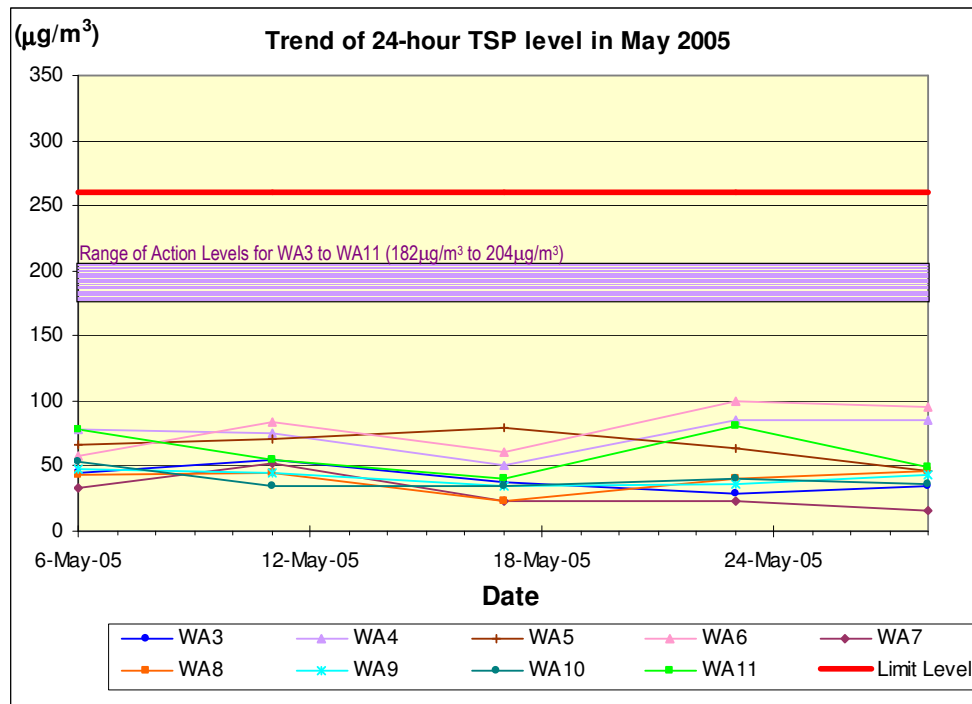

**4.3.3 Wind Monitoring Data**

The detailed wind monitoring data for the air quality monitoring period in May 2005 extracted from Hong Kong Observatory – Tsing Yi Wind Monitoring Station is attached in Appendix H.

## 5. NOISE

### 5.1 Monitoring Equipment

An integrating sound level meter was used for the noise monitoring. The sound level meter equipment are listed in Table 5-1.

**Table 5-1 Equipment list for construction noise monitoring**

Equipment	Manufacturer & Model No.	Precision Grade	Qty.
Integrating sound level meter	Brüel & Kjær 2231	IEC 651 Type 1	2
Integrating sound level meter	Brüel & Kjær 2238		3
Windshield	Brüel & Kjær UA0237	IEC 804 Type 1	6
Acoustical calibrator	Brüel & Kjær 4230	IEC 942 Type 1	2
Acoustical calibrator	Brüel & Kjær 4226		1
LCD wind speed indicator	Kestrel Vane Anemometer	--	2

## 5.2 Methodology

### 5.2.1 Field Measurement

- The sound level meter and the battery were checked to ensure that they were in proper condition.
- The sound level meter was set on a tripod at 1.2m above ground and at 1m from the exterior of the building façade.
- Before conducting the measurement, the sound level meter was calibrated by an acoustical calibrator.
- The measurement parameter was set to A-weighted sound pressure level. The time weighting was set in fast response and the time period of measurement at 30 minutes.
- The wind speed was checked during noise monitoring to ensure the steady wind speed did not exceed 5m/s, or wind with gusts did not exceed 10m/s.
- Any abnormal conditions that generated intrusive noise during the measurement were recorded on the field record sheet.
- After each measurement, the equivalent continuous sound pressure level ( $L_{eq}$ ),  $L_{10}$  and  $L_{90}$  were recorded on the field record sheet.
- The sound level meter was re-calibrated by the acoustical calibrator to confirm that there was no significant drift of reading.

### 5.2.2 Equipment Maintenance and Calibration

The sound level meter complies with the standards of IEC 651 (Fast, Slow, Impulse rms detector tests) and IEC 804 ( $L_{eq}$  functions). The acoustical calibrator model no. 4230 is in compliance with IEC 942. Both equipment are calibrated annually in-house using Brüel & Kjær (B&K) calibrator model no. 4226.

The National Physical Laboratory in Teddington, London, which is accredited by National Measurement accreditation Service (NAMAS), annually calibrates the B&K calibrator model no. 4226. All in-house calibrations that are undertaken can be traced back to the National Physical Laboratory. The calibration certificates of the noise monitoring equipment are given Appendix I. The next calibration will be conducted on or before 15 July 2005 for the sound level meters and the acoustical calibrators.

### 5.3 Results and Observations

#### 5.3.1 Weather Conditions and Other Factors

The weather condition varied from fine to cloudy during the noise monitoring period in May 2005.


The construction site had been under normal operation during the noise monitoring period and no unusual operation was observed. Traffic noise had been noticed at some noise monitoring locations during the noise monitoring period.

#### 5.3.2 Summary Results

A total of 5 set of noise measurement had been conducted between 0700-1900 hours on 3, 12, 18, 24 and 30 May 2005. The detailed construction noise monitoring results are given in Appendix J.

. The highest noise level was 74dB(A) recorded at No. 60-64, Tsing Lung Tau Village (WN10) on 24 May 2005 while the lowest noise level was 64dB(A) recorded at Phase 4, Sea Crest Villa (WN12) on 24 May 2005. The noise levels at each monitoring location are plotted and presented in Figure 5-1.

Figure 5-1 Graphical presentation of daytime noise levels for May 2005

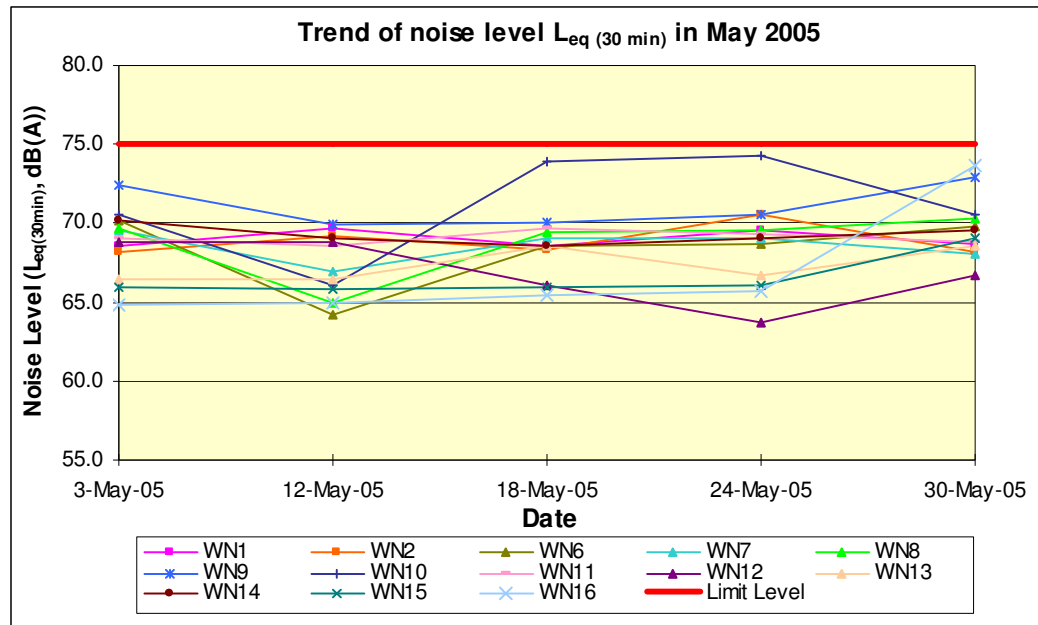

## 6. WATER QUALITY (DESIGNATED PROJECT)

### 6.1 Water Quality Equipment

Monitoring of Turbidity (Tby) in NTU, Dissolved Oxygen (DO) in mg/L and Suspended Solids (SS) in mg/L were carried out by the ET to ensure that any deteriorating water quality could be readily detected and timely action be taken to rectify the situation. The Tby and DO were measured in-situ while the SS was determined in the laboratory. A summary of the water quality monitoring equipment is provided in Table 6-1.

**Table 6-1 Water quality monitoring equipment**

Equipment	Manufacturer & Model No.	Qty
Handheld Salinity, Conductivity & Temperature System	YSI Model 30	1
Dissolved Oxygen Meter	YSI Model 52	1
pH meter	Hanna	1
Turbidimeter	HACH 2100P	1
Nephelometer	Analite Model 156	1

### 6.2 Methodology

#### *Dissolved Oxygen and Temperature Measuring Equipment*

The equipment to measure DO and temperature complies with the following:

- i. The instrument shall be a portable, weatherproof dissolved oxygen measuring instrument complete with cable and use a DC power source. It shall be capable of measuring:
  - A dissolved oxygen level in the range of 0-20 mg/L and 0-200% saturation; and
  - A temperature of 0-45°C.
- ii. It shall have a membrane electrode with automatic temperature compensation complete with a cable. Sufficient stocks of spare electrodes and cables shall be available for replacement where necessary (e.g. YSI model 59 meter, YSI 5739 probe, YSI 5795A submersible stirrer with reel and cable or an approved similar instrument).
- iii. Should salinity compensation not be integrated in the DO equipment, in-situ salinity shall be measured to calibrate the DO equipment prior to each DO measurement.

#### *Turbidity Measurement Instrument*

The instrument is a portable, weatherproof turbidity-measuring instrument complete with comprehensive operations manual. The equipment shall use a DC power source. It shall have a photoelectric sensor capable of measuring turbidity between 0-1000

NTU and be completed with a cable (e.g. Hach model 2100P or an approved similar instrument).

### ***Suspended Solids***

The following equipment is required to monitor the SS:

- i. A water sampler comprising a transparent PVC cylinder, with a capacity of not less than 2 litres and which can be effectively sealed with latex cups at both ends. The sampler shall have a positive latching system to keep it open and prevent premature closure until released by a messenger when the sampler is at the selected water depth (e.g. Kahlsico Water Sampler or an approved similar instrument).
- ii. Water samples for SS measurement of both the marine and freshwater environment shall be collected in high density polythene bottles, packed in ice (cooled at 4°C without being frozen) and delivered to the laboratory as soon as possible after collection.

### ***Water Depth Detector***

A portable, battery-operated echo sounder was used for the determination of water depth at each designated monitoring. This unit can either be handheld or affixed to the bottom of the monitoring boat, if the same vessel is to be used throughout the monitoring programme.

### ***Salinity***

A portable salinometer capable of measuring salinity in the range of 0-40 ppt shall be provided for measuring salinity of the water at each monitoring location and setting salinity compensation on the DO Meter.

### ***Location of the Monitoring Site***

A hand-held or boat-fixed type Differential Global Positioning System (DGPS) or other equivalent instrument of similar accuracy shall be provided and used during monitoring to ensure the monitoring vessel is at the correct location before taking measurements. For the monitoring locations in the water courses a hand-held DGPS, together with a suitably scaled map shall be used.

#### **6.2.1 Calibration and Accuracy of Instrumentation**

All in-situ monitoring instruments were checked, calibrated and certified by a laboratory accredited under HOKLAS or any other international accreditation scheme before use, and subsequently re-calibrated at 3 monthly intervals throughout all stages of the water quality monitoring. Responses of sensors and electrodes were checked with certified standard solutions before each use. Wet bulb calibration for a DO meter shall be carried out before measurement at each monitoring location.

For the on site calibration of field equipment, the BS 1427:1993, "Guide to Field and on-site test methods for the analysis of waters" shall be followed.



### 6.3 Marine Monitoring

As reported by the Contractor, major sea works at level below +2.5mPD had been completed in July 2003. The proposal on suspension of marine monitoring was submitted to IC(E), HyD, EPD and AFCD for comments on 25 September 2003. It was confirmed with IC(E) and AFCD that suspension of marine monitoring was acceptable if there is no “active” marine work being carried out. In future, if there is any marine work on or below +2.5mPD, the Contractor shall notify the relevant parties one month in advance and resume the marine monitoring. Subsequently, as instructed by the Contractor/ HyD, the marine monitoring was suspended since during the period from October 2003 to 31 July 2004. However, as instructed by the Contractor, the planned sand placement activities were conducted at Seawall B. Marine impact monitoring near Seawall B (i.e. WW1, WW2, WW3, WW4, WR-E-1234, WR-F-1234 and FCZ1) was resumed from 2 August to 27 August 2004. Since sand placement activities at Seawall B were ceased in August 2004, marine water monitoring was again suspended since September 2004.

## **7. LANDSCAPE AND VISUAL MONITORING AND AUDIT**

The landscape and visual monitoring and audits were carried out on 12 and 26 May 2005 by a Registered Landscape Architect.

The audit findings and recommendations are summarised in the following paragraphs.

### **7.1 Summary of Inspection – 12 May 2005**

#### **7.1.1 Matters Arising from Previous Inspections**

- The Contractor had cleaned up the foul water at the temporary garbage collection area at Slope 6. The Contractor was reminded to carry out more regular clearance of the collection area in order to prevent nuisance and mosquito breeding.
- The Contractor had cleared away the scrap woodpile and scattered construction wastes at NM-02 area.
- The Contractor had cleared away the scrap woodpile at Slope 8 area.
- The Contractor had cleared away the construction waste pile at RW-01 area.
- The Contractor had cleared away the scattered litter and construction wastes previously found at the footbridge FB-02 area. However, new scattered litter was found and the Contractor was requested to clear it away and tidy up the area as soon as possible.
- No dry surface condition was observed during the inspection.

#### **7.1.2 Site Clearance and Formation Works**

- Construction waste piles were found at RW13 and Seawall 'C' areas. The Contractor was requested to clear it away as soon as possible.
- Empty cement bags was found scattered at the new village gateway - 'Pai Lau' - area next to footbridge FB-03. The Contractor was requested to clear it away as soon as possible.

#### **7.1.3 Tree Felling and Transplanting Works**

- No tree transplanting work was carried out during the inspection period.

#### **7.1.4 Recommendations**

- The Contractor was reminded to clear away all scattered litter, garbage, etc. as found on site, and keep the site in a tidy condition at all times.
- The Contractor was reminded to carry out more regular clearance of temporary garbage collection areas to prevent nuisance and mosquito breeding.

## 7.2 Summary of Inspection – 26 May 2005

### 7.2.1 Matters Arising from Previous Inspections

- The Contractor had cleared away the construction waste piles at RW13 and Seawall 'C' areas.
- The Contractor had cleared away the scattered empty cement bags at the new 'Pai Lau' area next to footbridge FB-03.
- The Contractor had cleared away the scattered litter previously found at the area of footbridge FB-02. However, more scattered litter (mainly empty cans and bottles) was found and the Contractor was reminded to carry out more regular housekeeping to tidy up the area.
- No dry surface condition was observed during the inspection.

### 7.2.2 Site Clearance and Formation Works

- Construction waste piles, scrap woodpiles, and empty wooden crates were found at Portion 7 area. The Contractor was requested to clear it all away as soon as possible and to tidy up the work yard area.
- Construction waste piles were found at NM-02, FB-02, and Slope 8 areas. The Contractor was requested to clear it away as soon as possible.

### 7.2.3 Tree Felling and Transplanting Works

- No tree transplanting work was carried out during the inspection period.

### 7.2.4 Recommendations

- The Contractor was reminded to clear away all scattered litter, garbage, etc. as found on site, and keep the site in a tidy condition at all times.
- The Contractor was reminded to carry out more frequent watering of the site during dry periods to prevent dust nuisance.

## 7.3 Tree Transplanting Survival Rate

### 7.3.1 Tree Transplanting Survival Rate

- The tree transplanting survival rate as reported by the Contractor for the period up to the end of May is 100%.

## 7.4 Audit Schedule

### 7.4.1 Audit Schedule for June 2005

- The next audits are schedule to be conducted on 9 and 23 June 2005.
- The Landscape and Visual Monitoring & Audit Report for May 2005 prepared by the Registered Landscape Architect is attached in Appendix K.

## 8. SITE INSPECTION, WASTE DISPOSAL, ENVIRONMENTAL COMPLAINTS, ENVIRONMENTAL LICENSES AND NON-COMPLIANCE RECORDS

### 8.1 Site Audit Results

Weekly environmental site audits were carried out on 5, 17, 19 and 26 May 2005. The environmental concerns identified in the site audits are summarised in Table 8-1.

**Table 8-1 Summary of environmental concerns identified in site audits in May 2005**

Date of Issue Raised	Observation	Advice from EA	CT's Response / Environmental Outcomes	Closing Date
<b>Water Quality</b>				
05-05-2005	Effluent at Outfall I was not flowing smoothly. The pump was switched off.	To switch on the pump again.	Effluent flow smoothly.	19-05-2005
05-05-2005	Stagnant water was found in u-channel of slope 6.	To drain off the stagnant water.	U-channel was filled with gravel and pest control was conducted.	17-05-2005
05-05-2005	Mud trails were found outside site entrance of W14.	To remove mud trails.	Mud trails were cleaned.	19-05-2005
05-05-2005	Catch-pit and u-channel at slope 8 was silty, especially at channel of Tsing Lung Tau Temple.	To clean up the channel.	Channel was cleaned.	19-05-2005
17-05-2005	Mud trails were found on public road at FB03.	To remove mud trails.	Mud trails were cleaned.	19-05-2005
19-05-2005	Mud trails were found outside temporary access at RW01.	To remove mud trails.	Mud trails were cleaned.	26-05-2005
19-05-2005	Mud trails were found near site entrance of W38.	To remove mud trails.	Mud trails were cleaned.	26-05-2005
<b>Air Quality</b>				
26-05-2005	Exposed slope at Slope 8 was uncovered.	To cover the slope or build bunds by sandbags.	Sandbags were placed along the slope.	09-05-2005
<b>Construction Noise</b>				
No non-compliance was found.				
<b>Handling of Wastes and Chemicals</b>				
05-05-2005	Waste accumulated near the east end of BPRW70.	To dispose off waste.	Waste disposed.	17-05-2005
26-05-2005	Waste accumulated at Portion 7.	To dispose off waste.	Waste disposed.	02-06-2005
26-05-2005	Oil drums were not placed in drip trays at Portion 7.	To place the oil drums in drip trays.	Drip trays were used.	02-06-2005
26-05-2005	Oil stains were found near chemical storage area of Portion 7.	To remove oil stains.	Oil stains were removed.	09-06-2005

## 8.2 Waste Disposal

The Contractor had properly disposed of the waste material in the reporting month, and the disposal quantity in the reporting month is summarised in Table 8-2.

**Table 8-2 Waste disposal quantity in May 2005**

Type of waste or material		Disposal at	No. of loads or quantities	Remarks
C&D waste		WENT Landfill	17 loads	--
C&D material		Public Filling Area in Tuen Mun	1341 loads	--
Grease trap waste		Interim Grease Trap Waste Treatment Facility at WENT Landfill	0	--
Chemical waste	Spent lube oil	Collected by licensed collector	0	--

## 8.3 Complaint Record

There were one environmental complaint and one enquiry received in May 2005.

The first complaint is regarding the daytime noise generated from the use of power mechanical equipment during the hours between 8am to 12am near Sea Crest Villa Phase II and III on 4 May 2005. Contractor responded to the complainant that daytime construction noise generated from activities was well within the guidelines of prevailing standards and promised to look at opportunities to spread the noisy works more evenly throughout the day and make appropriate arrangement for works scheduling of the concerned works wherever practicable.

There was also an enquiry from EPD regarding the occurrence of silty water at the seashore in front of Sea Crest Villa Phase IV on 8 May 2005. It was found that no construction work was conducted on that day. It was suspected that the heavy rain might have caused the erosion of some slopes near the seaside of the retaining wall. Contractor covered the slope to prevent reoccurrence of the issue.

Detail of the complaint is given in Appendix L. A log record on the environmental complaints is given in Appendix M and a cumulative statistics on environmental complaints is given in Table 8-3.

**Table 8-3 Cumulative statistics on environmental complaints**

No. of complaints received in the reporting month	No. of outstanding complaints	Cumulative no. of complaints received since the commencement of project
1	0	36

## 8.4 Non-compliances

There were no non-compliances for both the air quality and noise monitoring during the reporting period.

## **8.5 Notification of Summons and Successful Prosecution**

There was neither notification of summons nor prosecution received during the reporting month.

## **8.6 Environmental Licenses**

There was one new CNP granted during the reporting period. The detail of CNP is given in Appendix N.

## 9. REFERENCES

- [1] Mouchel Halcrow Joint Venture. 2001. Castle Peak Road Improvement between Area 2 and Ka Loon Tsuen, Tsuen Wan West Contract No. HY/99/18, Environmental Monitoring & Audit Manual.
- [2] Ove Arup & Partners Hong Kong Limited. July 2002. Contract No. HY/99/18 Castle Peak Road Improvement between Shem Tseng and Ka Lung Tsuen, Tsuen Wan, Environmental Baseline Monitoring Report (Second Issue).
- [3] Mouchel Halcrow Joint Venture. 2001. D&C Consultancy Agreement No. CE 1/96 Castle Peak Road Improvement between Area 2 and Ka Loon Tsuen, Tsuen Wan, Tree Survey Report & Tree Felling Application Revision D.
- [4] Mouchel Halcrow Joint Venture. Contract No. HY/99/18 March 2002. D&C Consultancy Agreement No. CE 1/96 Castle Peak Road Improvement between Area 2 and Ka Loon Tsuen, Tsuen Wan, Supplementary Tree Survey Report & Tree Felling Application Revision A.





APPENDIX A  
**Detailed site layout  
plans**

---




NOTES:  
 1. ALL CO-ORDINATES ARE IN ACCORDANCE WITH THE 1980 HONG KONG METRIC GRID SYSTEM.  
 2. ALL LEVELS ARE IN METRES ABOVE THE PRINCIPAL DATUM (MPT) AND RELATE TO THE SETTING OUT LINES.

Legend:

Minor signboard  
 (576 : 7.2m (L) X 1.5m (width))

- LEGEND
- DENOTES PRINCIPAL SETTING OUT LINE
  - DENOTES FOOTPATH
  - DENOTES EDGE OF CARRIAGEWAY
  - DENOTES NET SOIL CUT SLOPE
  - DENOTES NET ROCK CUT SLOPE
  - DENOTES NET SOIL OR ROCK FILL SLOPE
  - DENOTES SLOPE MAINTENANCE STRAIGHT OR ACCESS STRAIGHT TO BEAS
  - DENOTES RETAINING WALL
  - DENOTES BORED PILE RETAINING WALL
  - DENOTES WORKS LIMIT
  - DENOTES PROPOSED CARRIAGEWAY LEVEL (MPT)
  - DENOTES SLOPE TO BE STABILISED
  - DENOTES ROAD BRIDGE
  - DENOTES VIADUCT
  - DENOTES NOISE ENCLOSURE
  - DENOTES 5m HIGH NOISE BARRIER
  - DENOTES 1.5m HIGH NOISE BARRIER
  - DENOTES GARDEN GARDEN ACCOMMODATION WORK

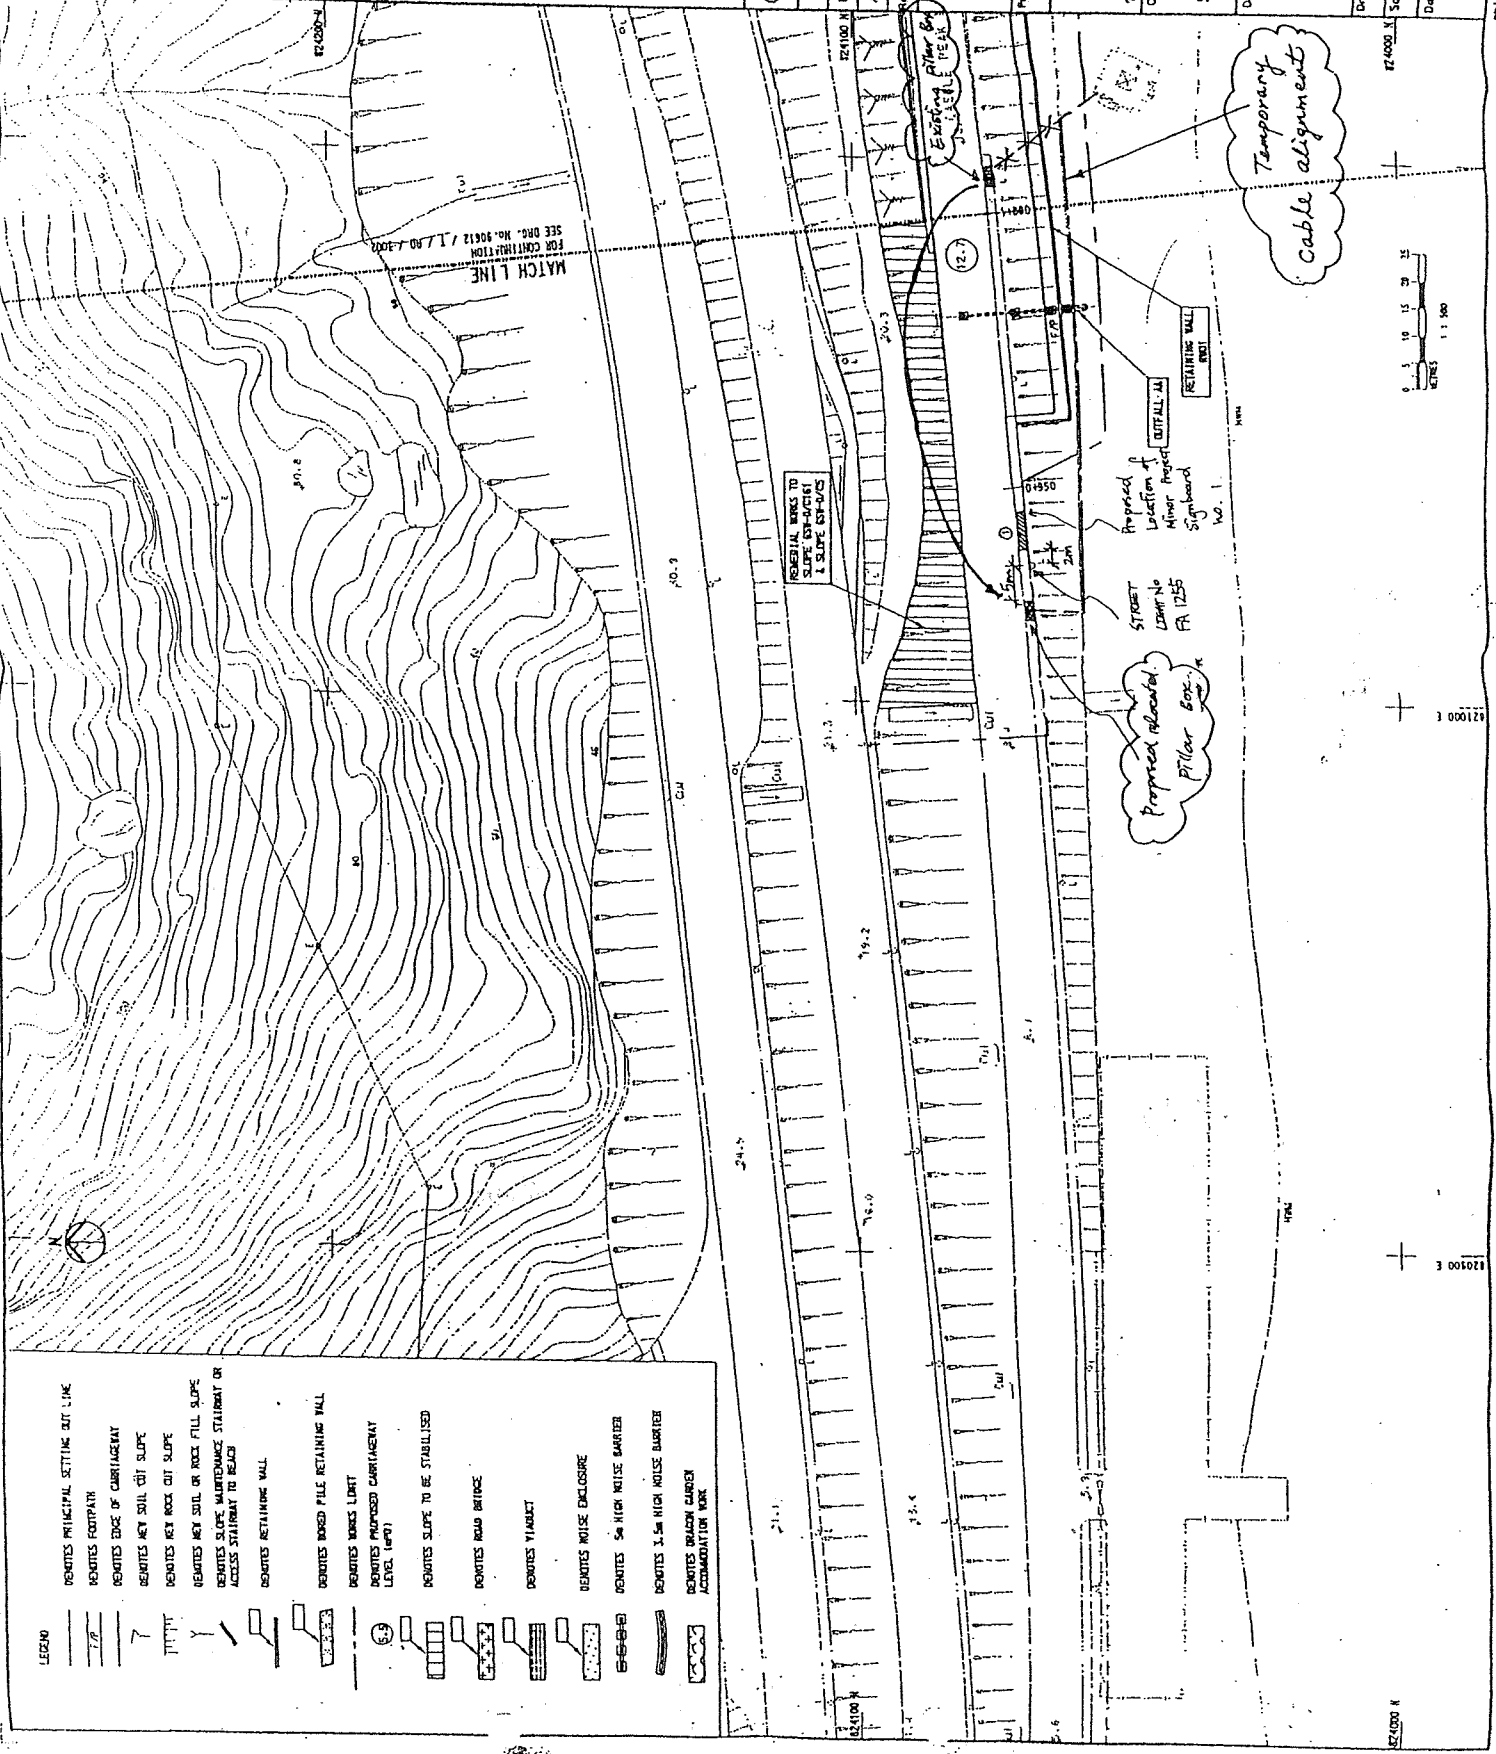

CONTRACT DRAWING

2nd Issue	Contract Issue	SP	DC	26/01
1st Issue	Tender Issue	SP	DC	PS JUN 01
Issue	Amendment	By	Chk./Appr	Date

Major Works Project Management Office,  
 Highways Department,  
 Hong Kong

Project No. 6553TH Contract No. HY / 99 / 18


Mouchei Hairōw JV

Sub-Consultants  
 ACL Asia, MVA Asia Ltd,  
 Townland Consultants Ltd., Chesterton Petty Ltd.

Contract Title  
 Castle Peak Road Improvement Between  
 Sharn Tseng and Ka Loon Tsuen, Tsuen Wan

Drawing Title  
 SCHEME GENERAL ARRANGEMENT  
 CHAINAGE 960 TO 1000

Drawn	WDD	Checked	JWTL	Approved	PS
Scale	1:1000	CAD File No.	R03001000	Date	JUNE 2001
Date Issued	JUNE 2001	Drawing No.	90612/T/RD/3001	Rev.	B



NOTES :  
 1. FOR GENERAL NOTES AND LEGEND REFER TO  
 1. DRAWING NO. 90612 / T / RD / 3001.

CONTRACT DRAWING

2nd Issue	Contract Issue	SP	1	24/06
1st Issue	Tender Issue	SP	DC PS	JUN 01
Issue	Amendment	By	Chk./App.	Date

**MWH** Major Works Project Management Office,  
 Highways Department,  
 Hong Kong

Project No. 6553TH Contract No. HY / 99 / 18


**Mouchel Halcrow . JV**  
 Sub-Consultants

ACL Asia, MVA Asia Ltd.,  
 Townland Consultants Ltd., Chesterton Petty Ltd.

Contract Title  
 Castle Peak Road Improvement Between  
 Sham Tseng and Ka Loon Tsuen, Tsuen Wan

Drawing Title  
 SCHEME GENERAL ARRANGEMENT  
 CHAINAGE 1000 TO 1270

Drawn	WDD	Checked	JWTL	Approved	PS
Scale	1:500	CAD File No.	RD3002.DGN	Date	JUNE 2001
Date Issued	JUNE 2001	Drawing No.	90612 / T / RD / 3002	Rev.	B

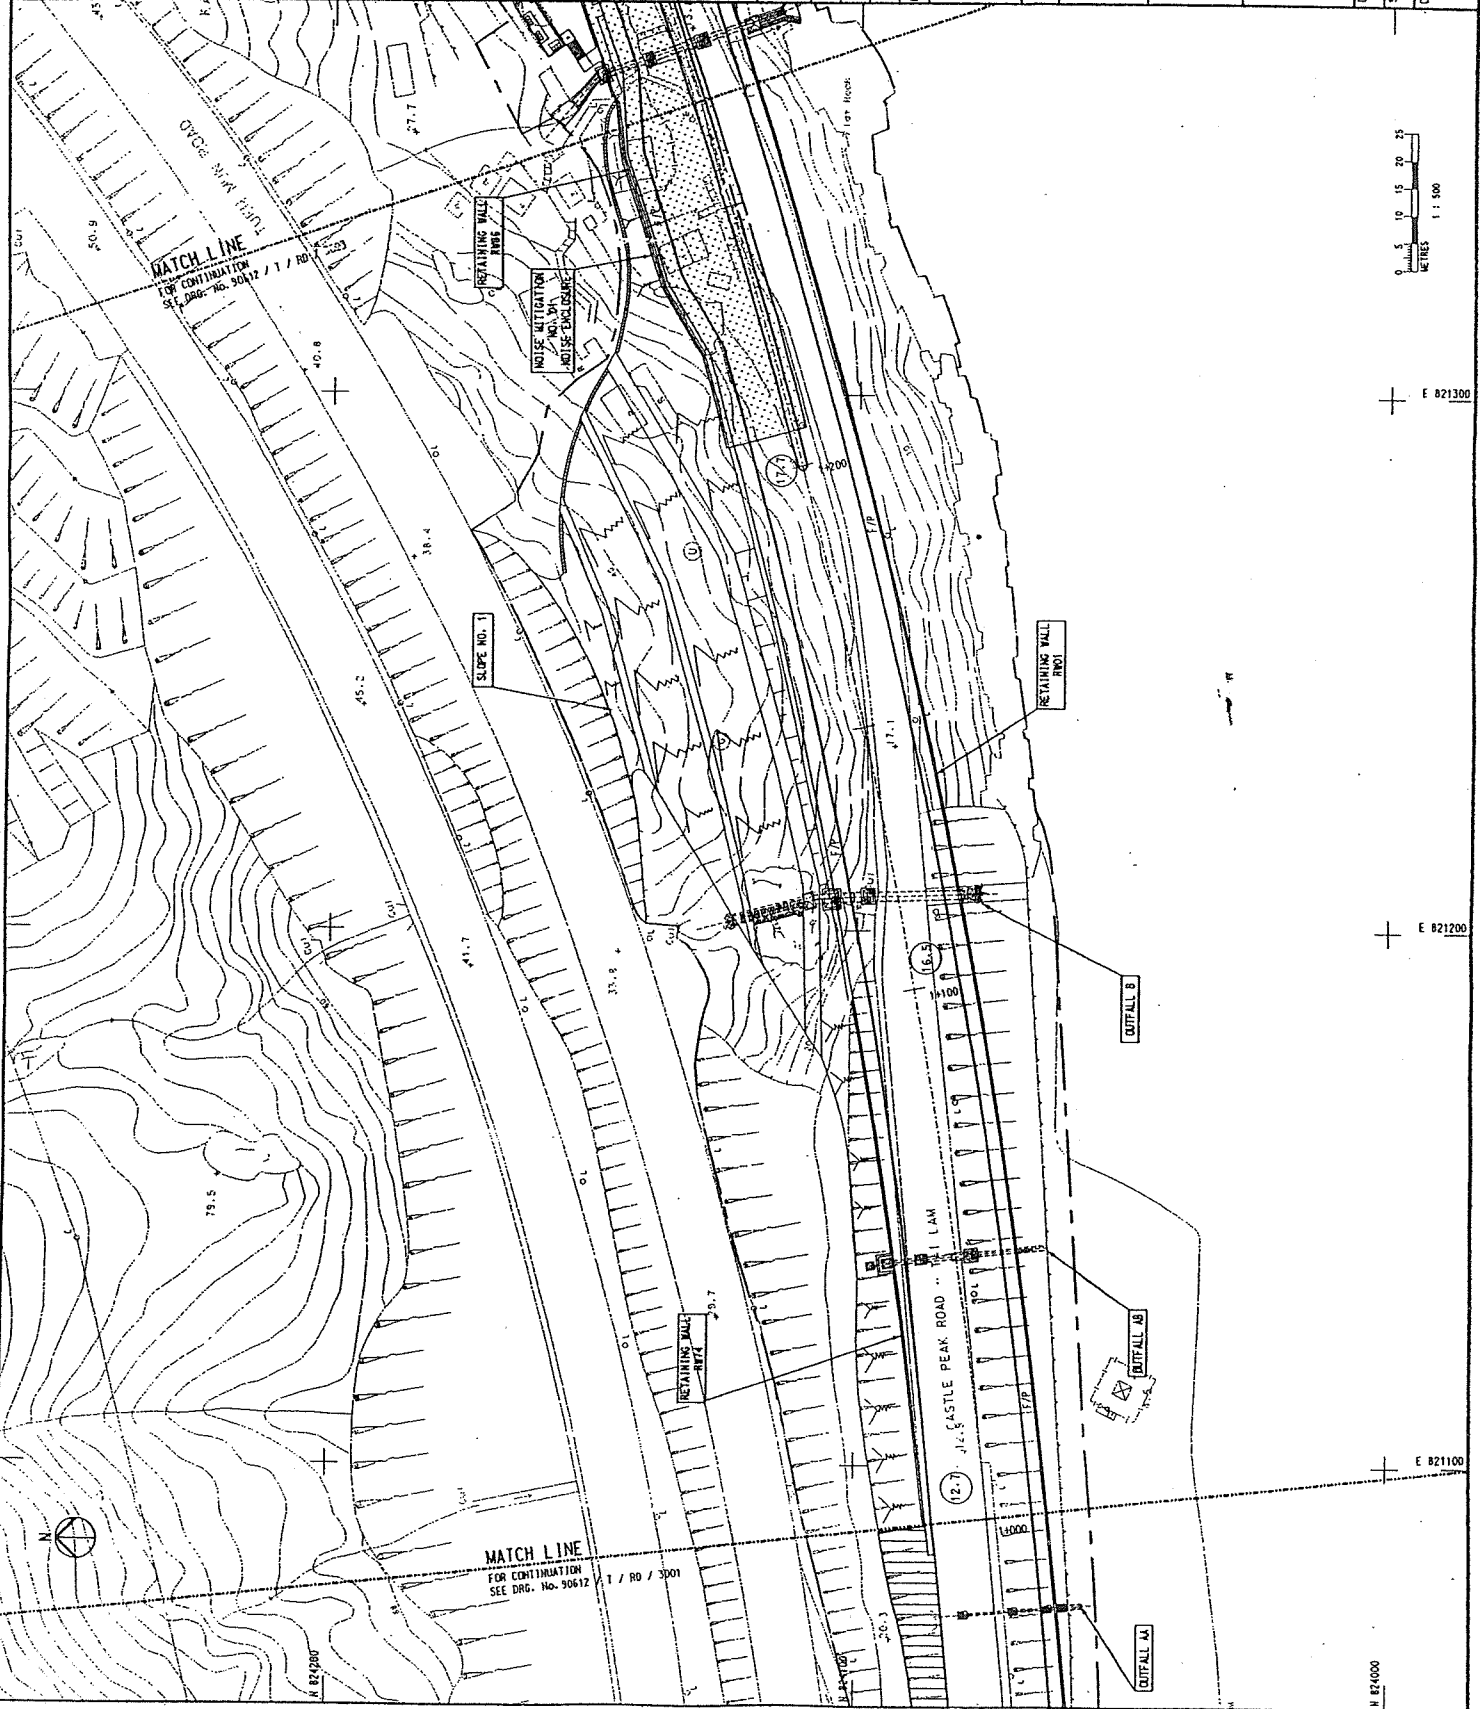

NOTES:  
1. FOR GENERAL NOTES AND LEGEND REFER TO DRAWING NO. 90612 / T / RD / 3001.

CONTRACT DRAWING

B	2nd Issue	Contract Issue	SP	DC	5/11
A	Final Issue	Tender Issue	SP	DC	PS JUN
Rev	Status	Amendment	By	CHK-App.	Date

**MW** Major Works Project Management Office,  
Highways Department,  
Hong Kong

Project No. 6553TH Contract No. HY / 99 / 18

**Mouchel Halcrow JV**


Sub-Consultants  
ACL Asia, MYA Asia Ltd.,  
Townland Consultants Ltd., Chesterton Petty Ltd

Castle Peak Road Improvement Between  
Sham Tseng and Ka Loon Tsuen, Tsuen Wan

Drawing Title

SCHEME GENERAL ARRANGEMENT  
CHAINAGE 1270 TO 1570

Drawn	WDD	Checked	JWTL	Approved	PS
Scale	1:1,500	CAD File No.	RD3005.DGN	Date	JUNE 2001
Date Issued	JUNE 2001	Drawing No.	90612 / T / RD / 3003	Re	B

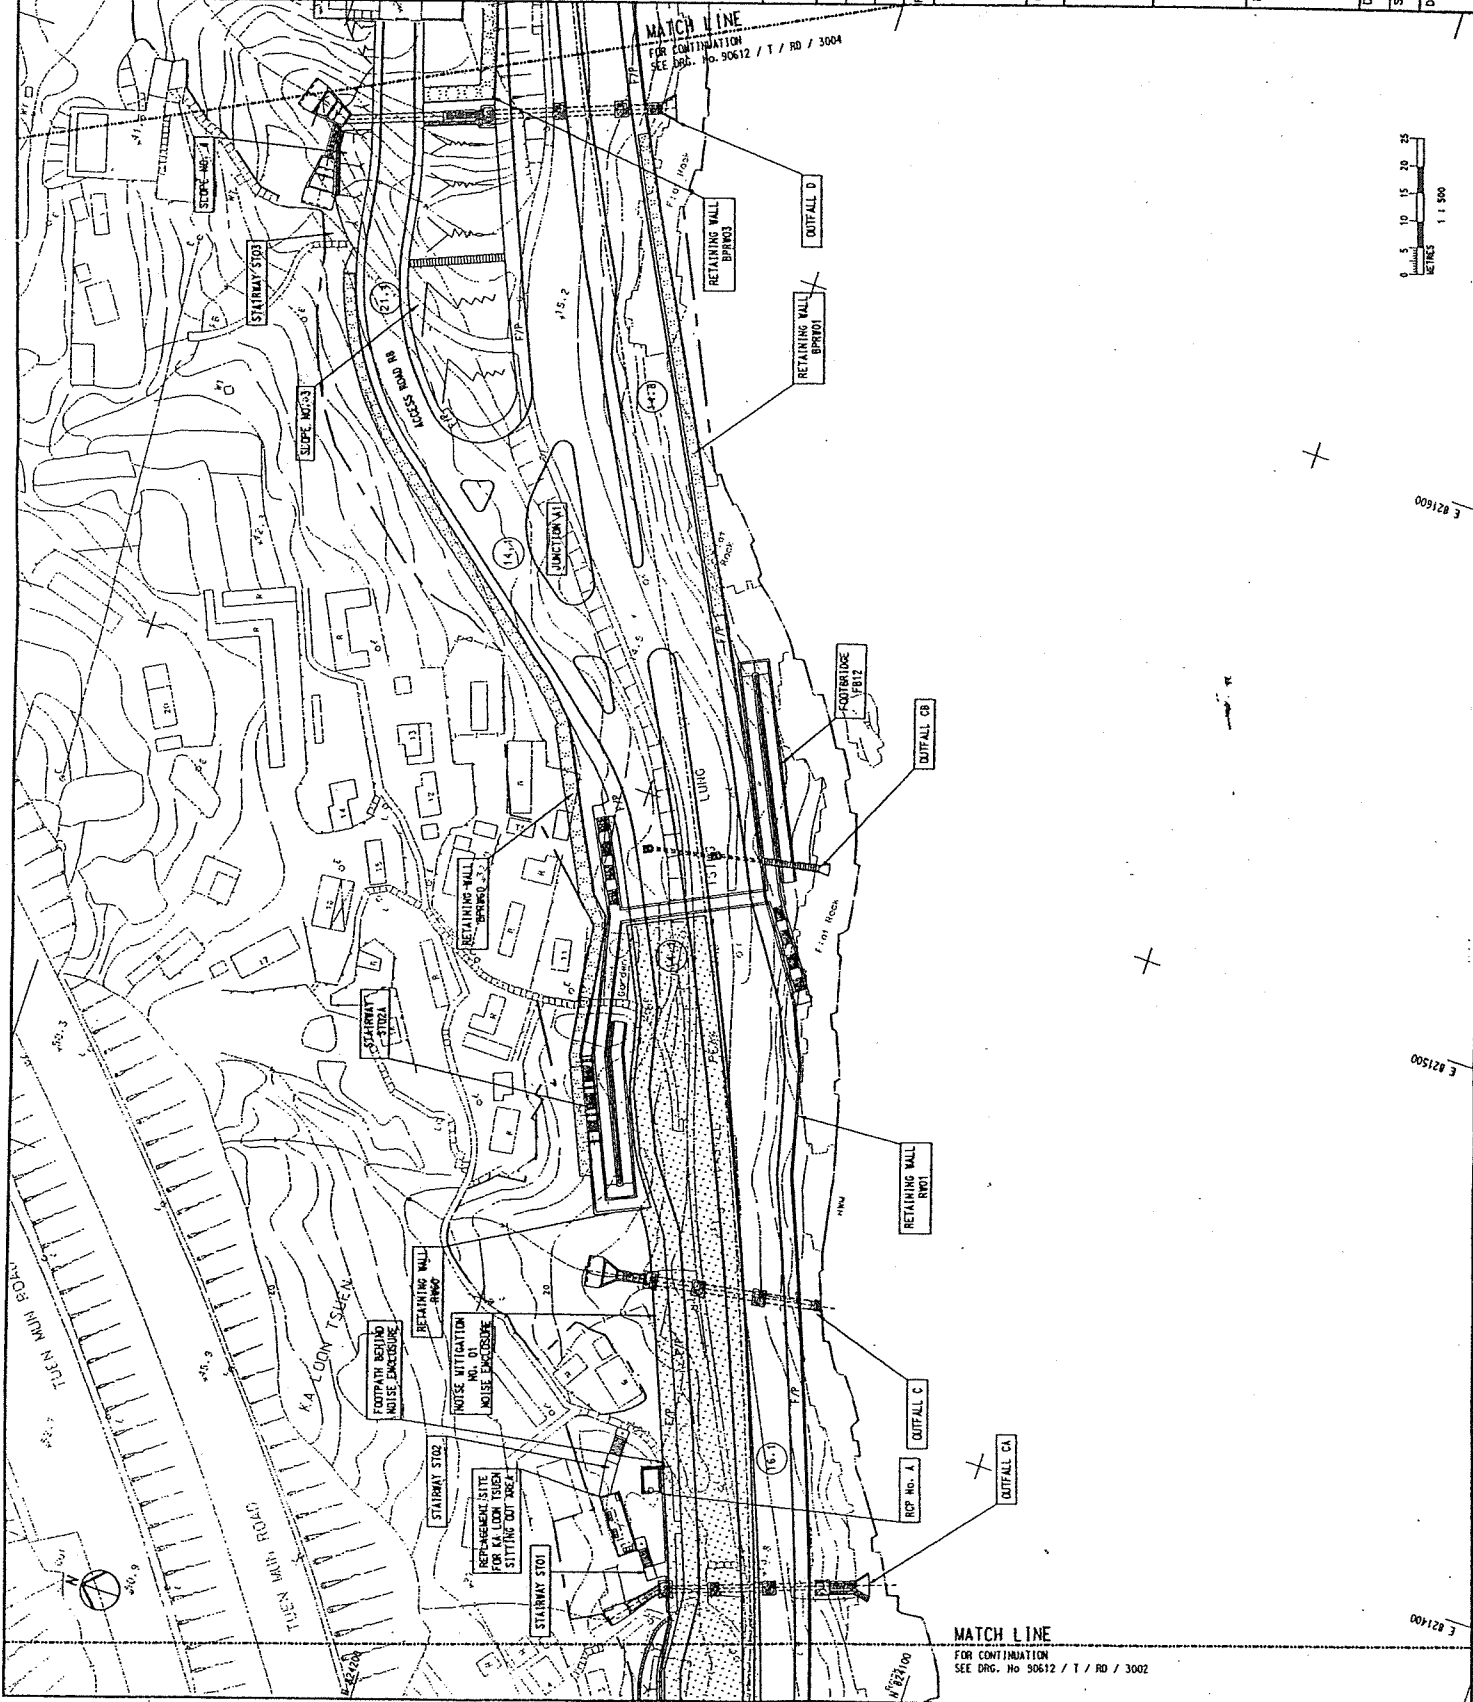

E 821600

E 821500

E 821400

NOTES :

1. FOR GENERAL NOTES AND LEGEND REFER TO DRAWING No. 90612 / T / RD / 3001.

CONTRACT DRAWING

B	2nd Contract Issue	SP DC	5/12/01
A	Final Tender Issue	SP DC	PS JUN 01
REV	Issue	Amendment	By Chk./App. Date

Major Works Project Management Office,  
Highways Department,  
Hong Kong

Project No. 6553TH Contract No. HY / 99 / 18

Mouchel Halcrow JV


Sub-Consultants  
ACL Asia, MYA Asia Ltd.,  
Townland Consultants Ltd., Chesterton Petty Ltd.

Contract Title  
Castle Peak Road Improvement Between  
Sham Tseng and Ka Loon Tsuen, Tsuen Wan


Drawing Title

SCHEME GENERAL ARRANGEMENT  
CHANGING 1570 TO 1870

Drawn	WDD	Checked	JWTL	Approved	PS
Scale	1:500	CAD File No.	RD3004.DGN	Date	JUNE 2001
Date Issued	JUNE 2001	Drawing No.	90612/T/RD/3004	Rev.	B

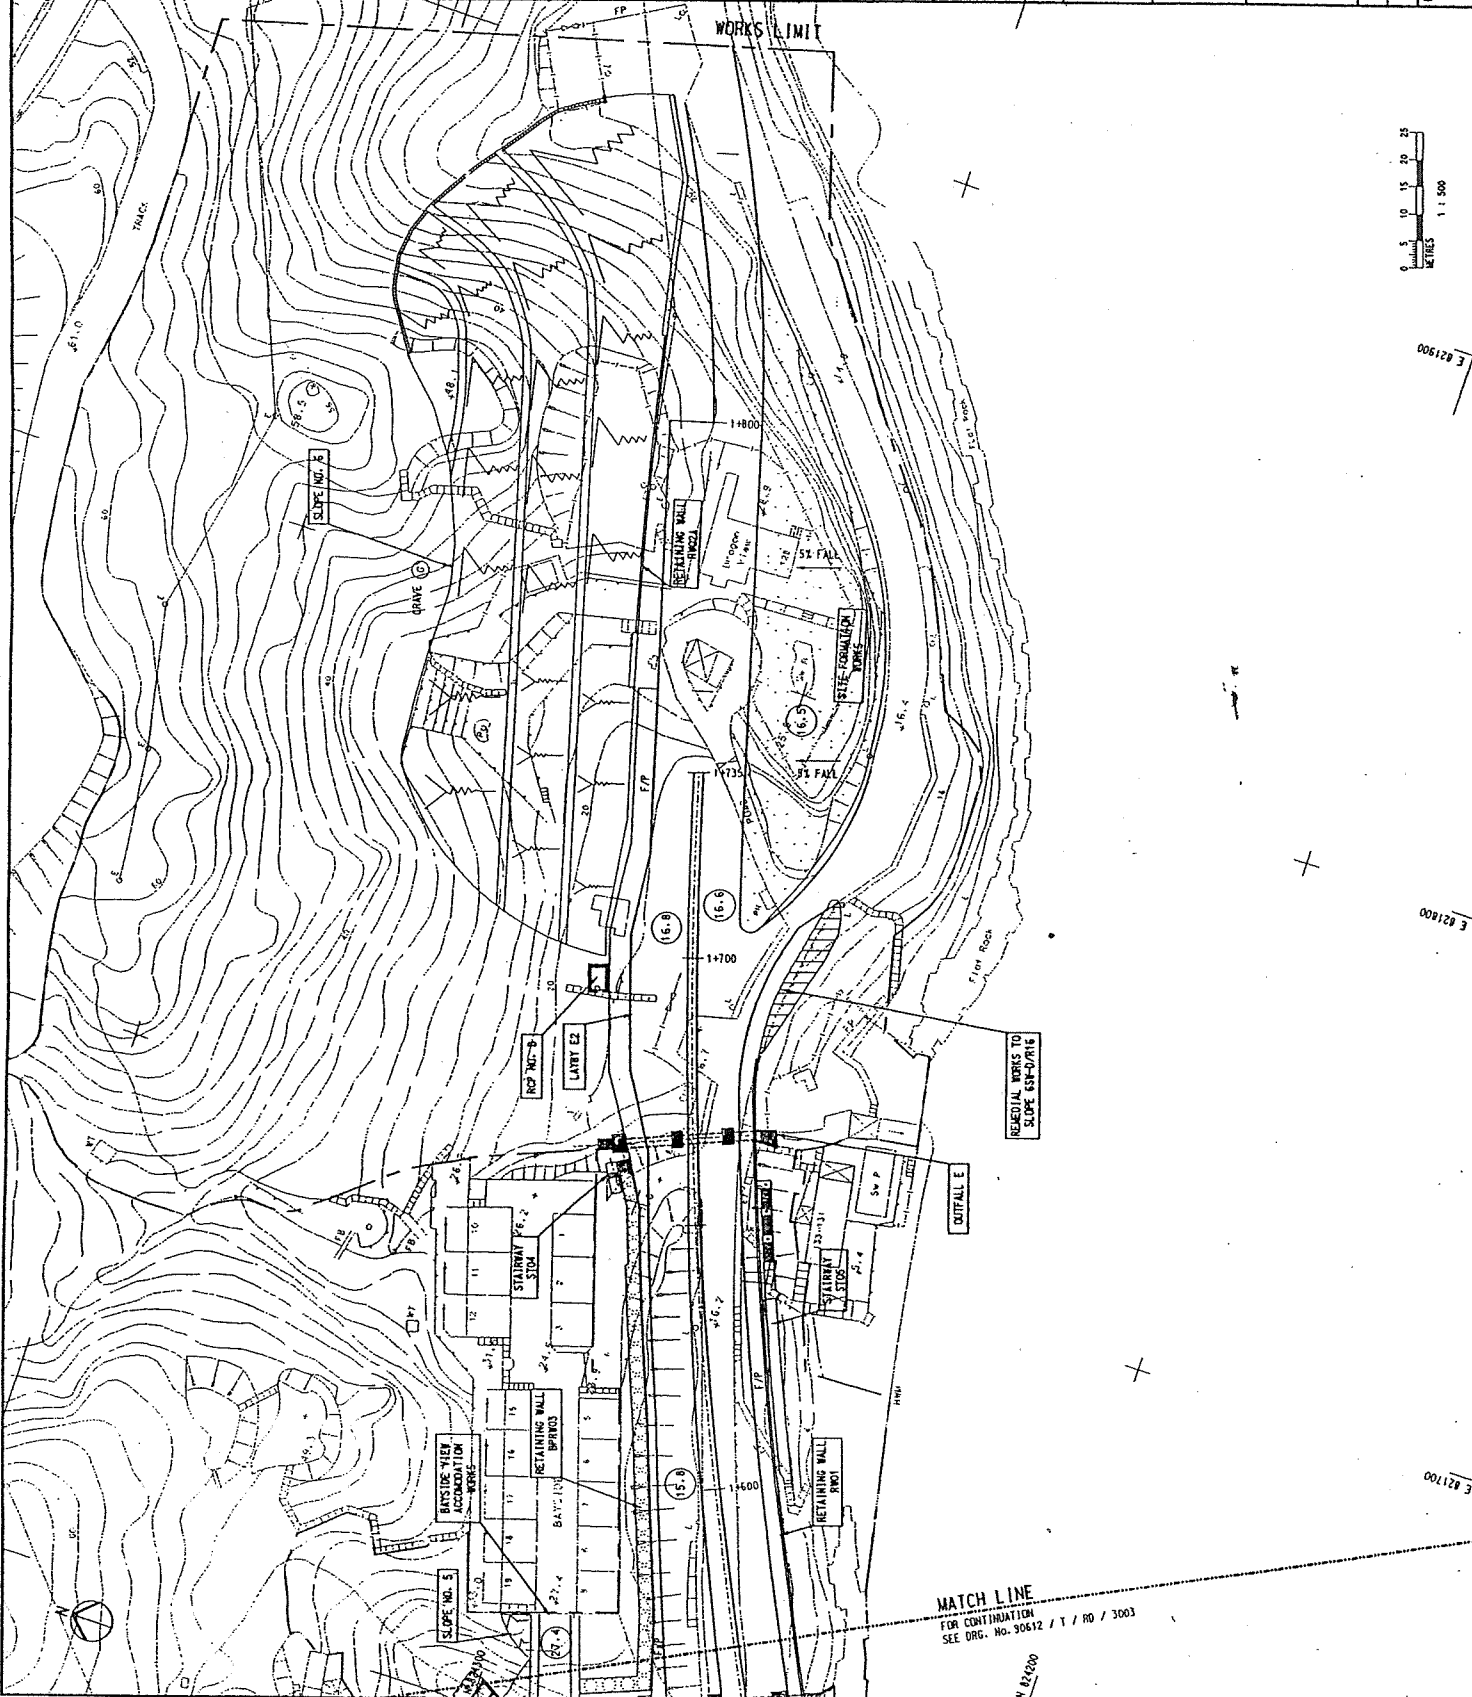

NOTES  
1. FOR GENERAL NOTES AND LEGEND REFER TO DRAWING No. 90612/T/RD/3001.

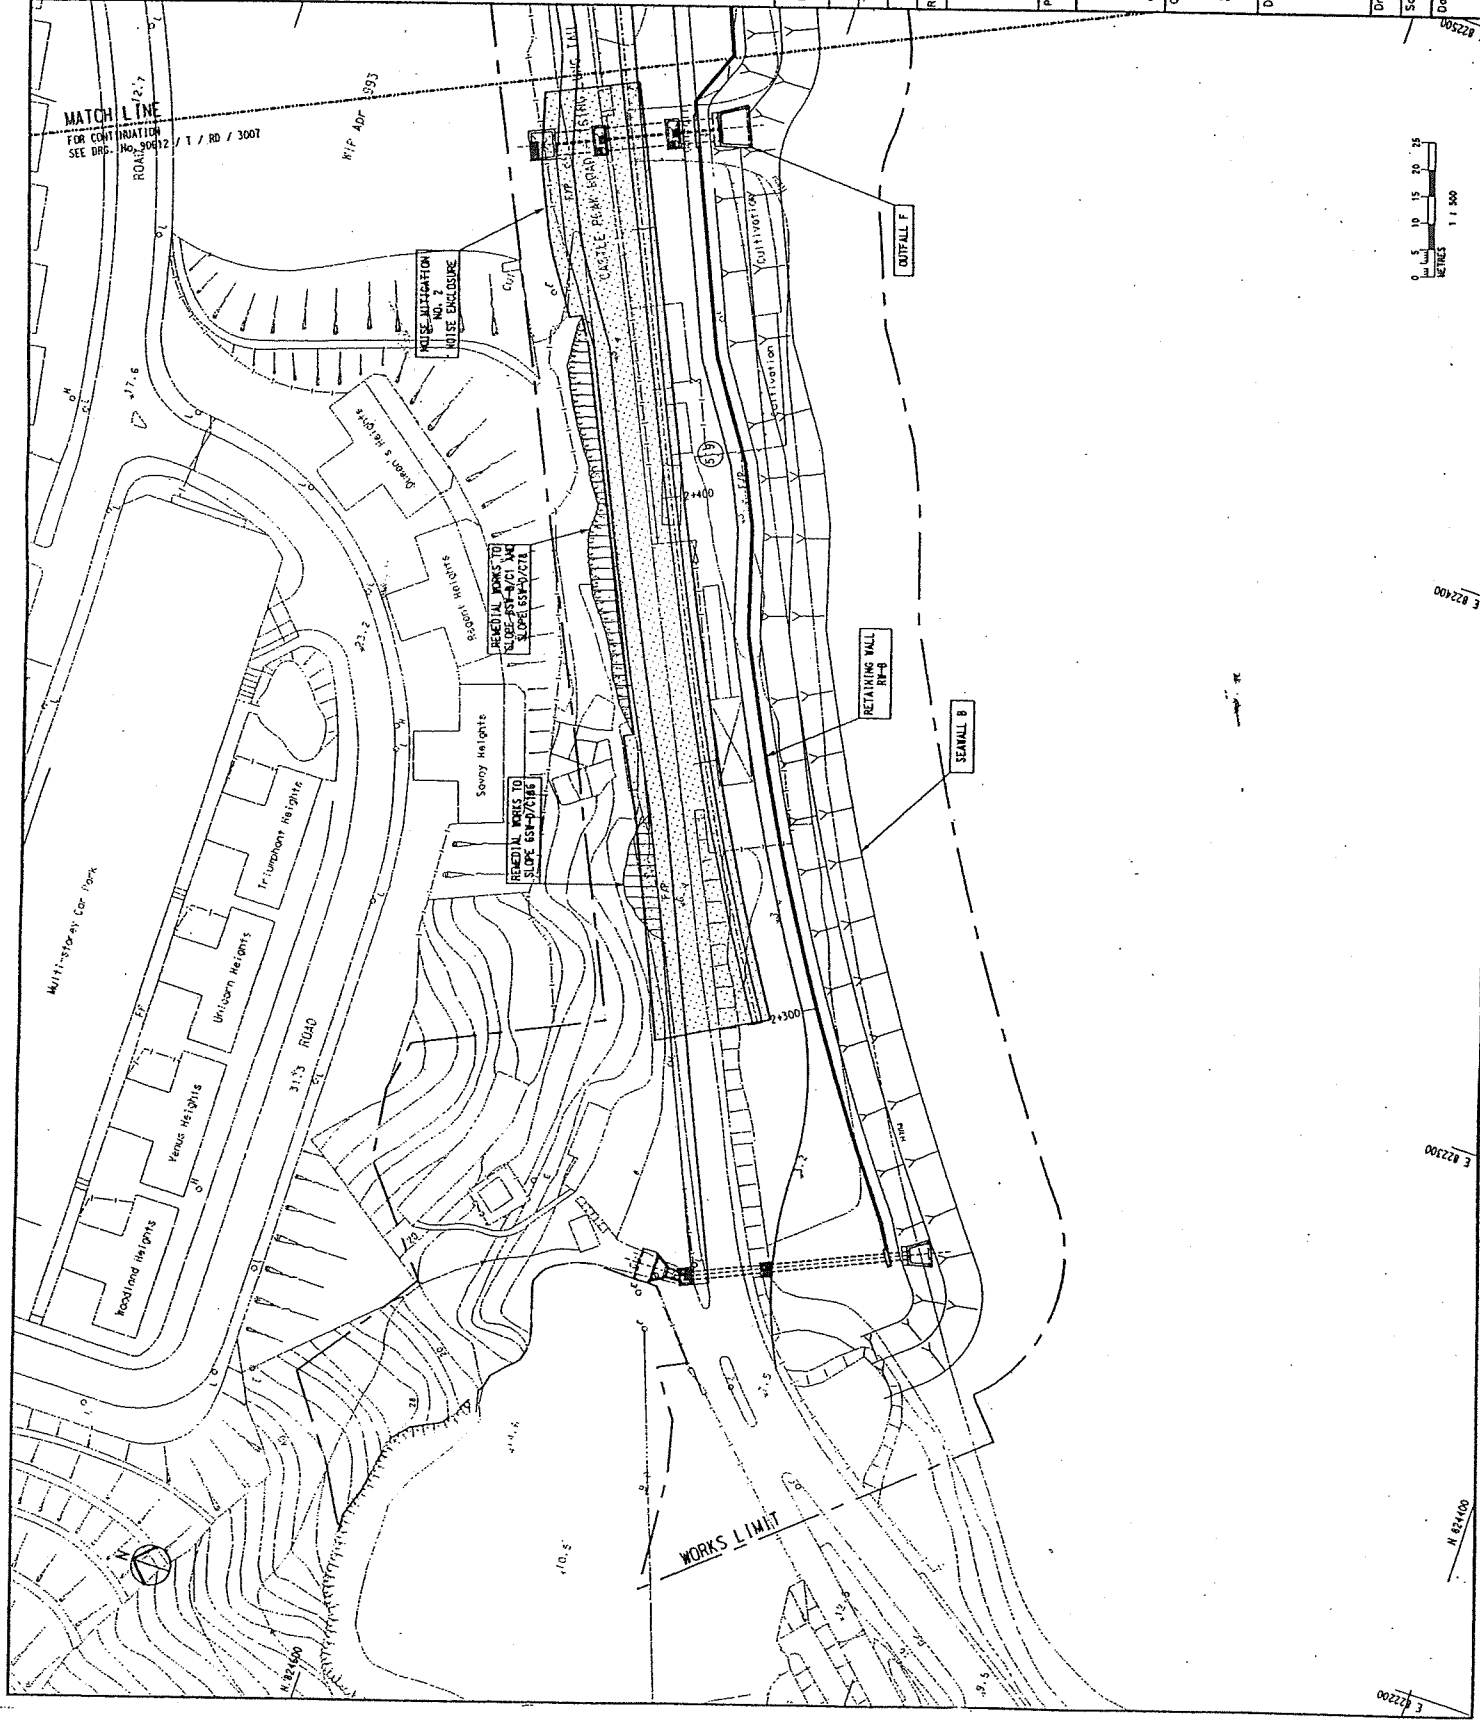

CONTRACT DRAWING

2nd Issue	Contract Issue	SP	2/11
1st Issue	Tender Issue	SP	05 JUN 01
Rev	Issue	Amendment	By: Chk. App. Date
	STATUS		

Major Works Project Management Office,  
Highways Department,  
Hong Kong

Project No. 6553TH Contract No. HY / 99 / 18

**Mouchel Halcrow JV**


Sub-Consultants  
ACL Asia, MVA Asia Ltd.,  
Townland Consultants Ltd., Chesterton, Petty Ltd.

Castle Peak Road Improvement Between  
Sham Tseng and Ka Loon Tsuen, Tsuen Wan

Drawing Title

SCHEME GENERAL ARRANGEMENT  
CHAINAGE 2300 TO 2480

Drawn	WDD	Checked	JWTL	Approved	PS
Scale	1:500	CAD File No.	RDS006.DGN	Date	JUNE 2001
Date Issued	JUNE 2001	Drawing No.	90612/T/RD/3006	Rev.	B



E 82200

N 82400

E 82300

E 82400

E 82500

**NOTES**

1. FOR GENERAL NOTES AND LEGEND REFER TO DRAWING NO. 90612 / T / RD / 3001.

**CONTRACT DRAWING**

B	2nd Issue	Contract Issue	Sp	DC	21/1/01	
A	First Issue	Tender Issue	SP	DC	PS JUN 01	
Rev	Status	Amendment	By	Chk.	App.	Date

Major Works Project Management Office,  
Highways Department,  
Hong Kong


Project No. 6553TH Contract No. HY / 99 / 1B

**Mouchel Halcrow JV**  
Sub-consultants  
ACL Asia, MVA Asia Ltd.,  
Townland Consultants Ltd., Chesterton Peity Ltd.

Contract Title  
Castle Peak Road Improvement Between  
Sham Tseng and Ka Loon Tsuen, Tsuen Wan

Drawing Title  
**SCHEME GENERAL ARRANGEMENT  
CHAINAGE 2480 TO 2785**

Drawn	WDD	Checked	JW/TL	Approved	PS
Scale	1:500	CAO File No.	HO3007.DGN	Date	JUNE 2001
Date Issued	JUNE 2001	Drawing No.	90612/T/RD/3007	Rev.	B

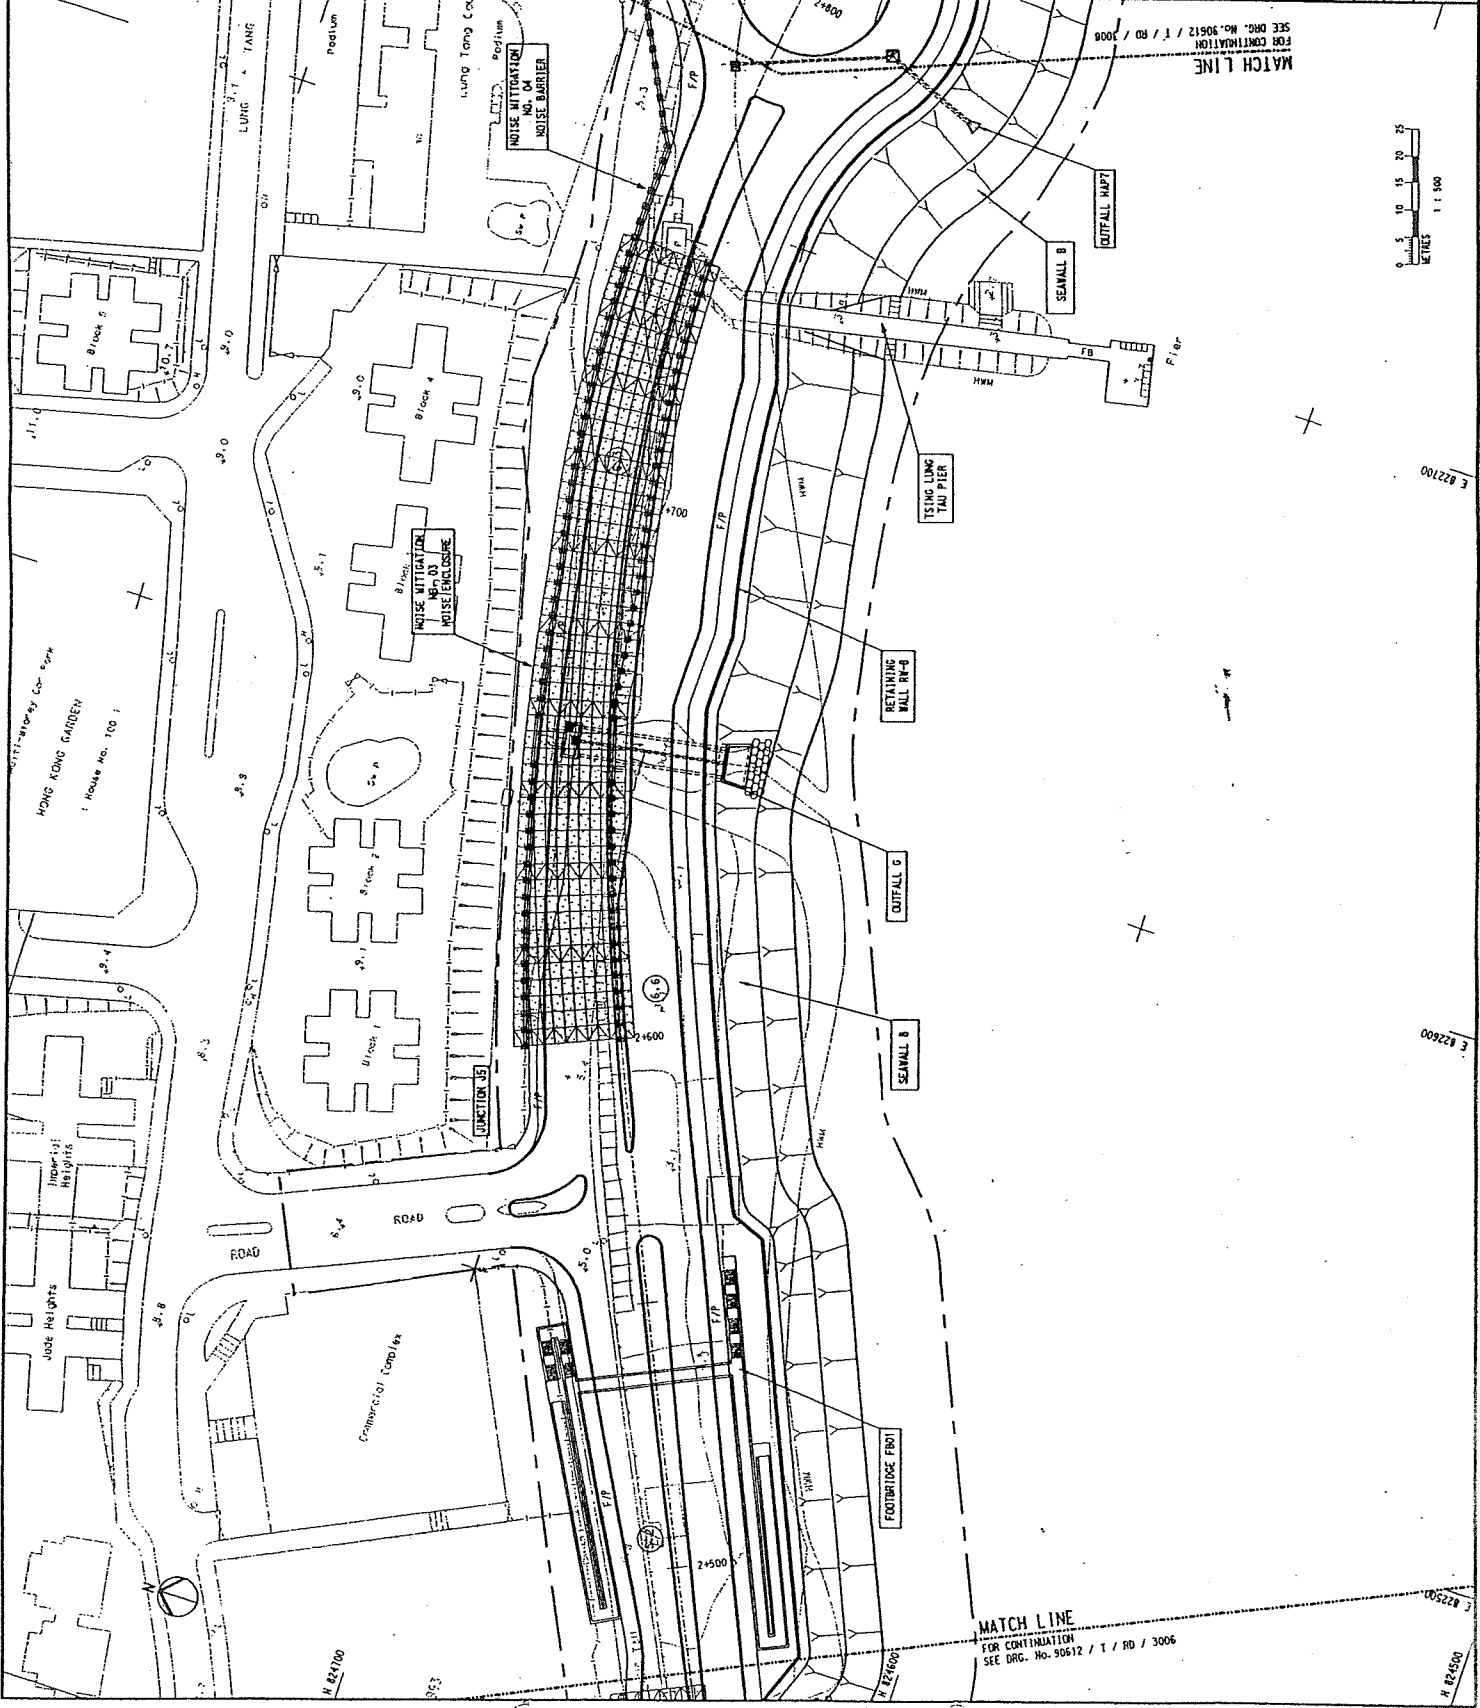



**NOTES**

1. FOR GENERAL NOTES AND LEGEND REFER TO DRAWING NO. 90612 / T / RD / 3001.

**CONTRACT DRAWING**

2nd Issue	Contract Issue	SP/DC	1/1/01
1st Issue	Tender Issue	SP	DC
Revision	Issue	By	Date

Major Works Project Management Office,  
Highways Department,  
Hong Kong

Project No. 6553TH Contract No. HY / 99 / 18


**Mouchel Halcrow JV**

Sub-Consultants  
ACL Asia, MVA Asia Ltd.,  
Townland Consultants Ltd., Chesterton Petty Ltd.

Contract Title  
Castle Peak Road Improvement Between  
Sham Tseng and Ka Loon Tsuen, Tsuen Wan

Drawing Title  
SCHEME GENERAL ARRANGEMENT  
CHAINAGE 2785 TO 3130

Drawn	WOO	Checked	JWTL	Approved	PS
Scale	1:1,500	CAD File No.	RDS006.DGN	Date	JUNE 2001
Date Issued	JUNE 2001	Drawing No.	90612 / T / RD / 3008	Rev.	B

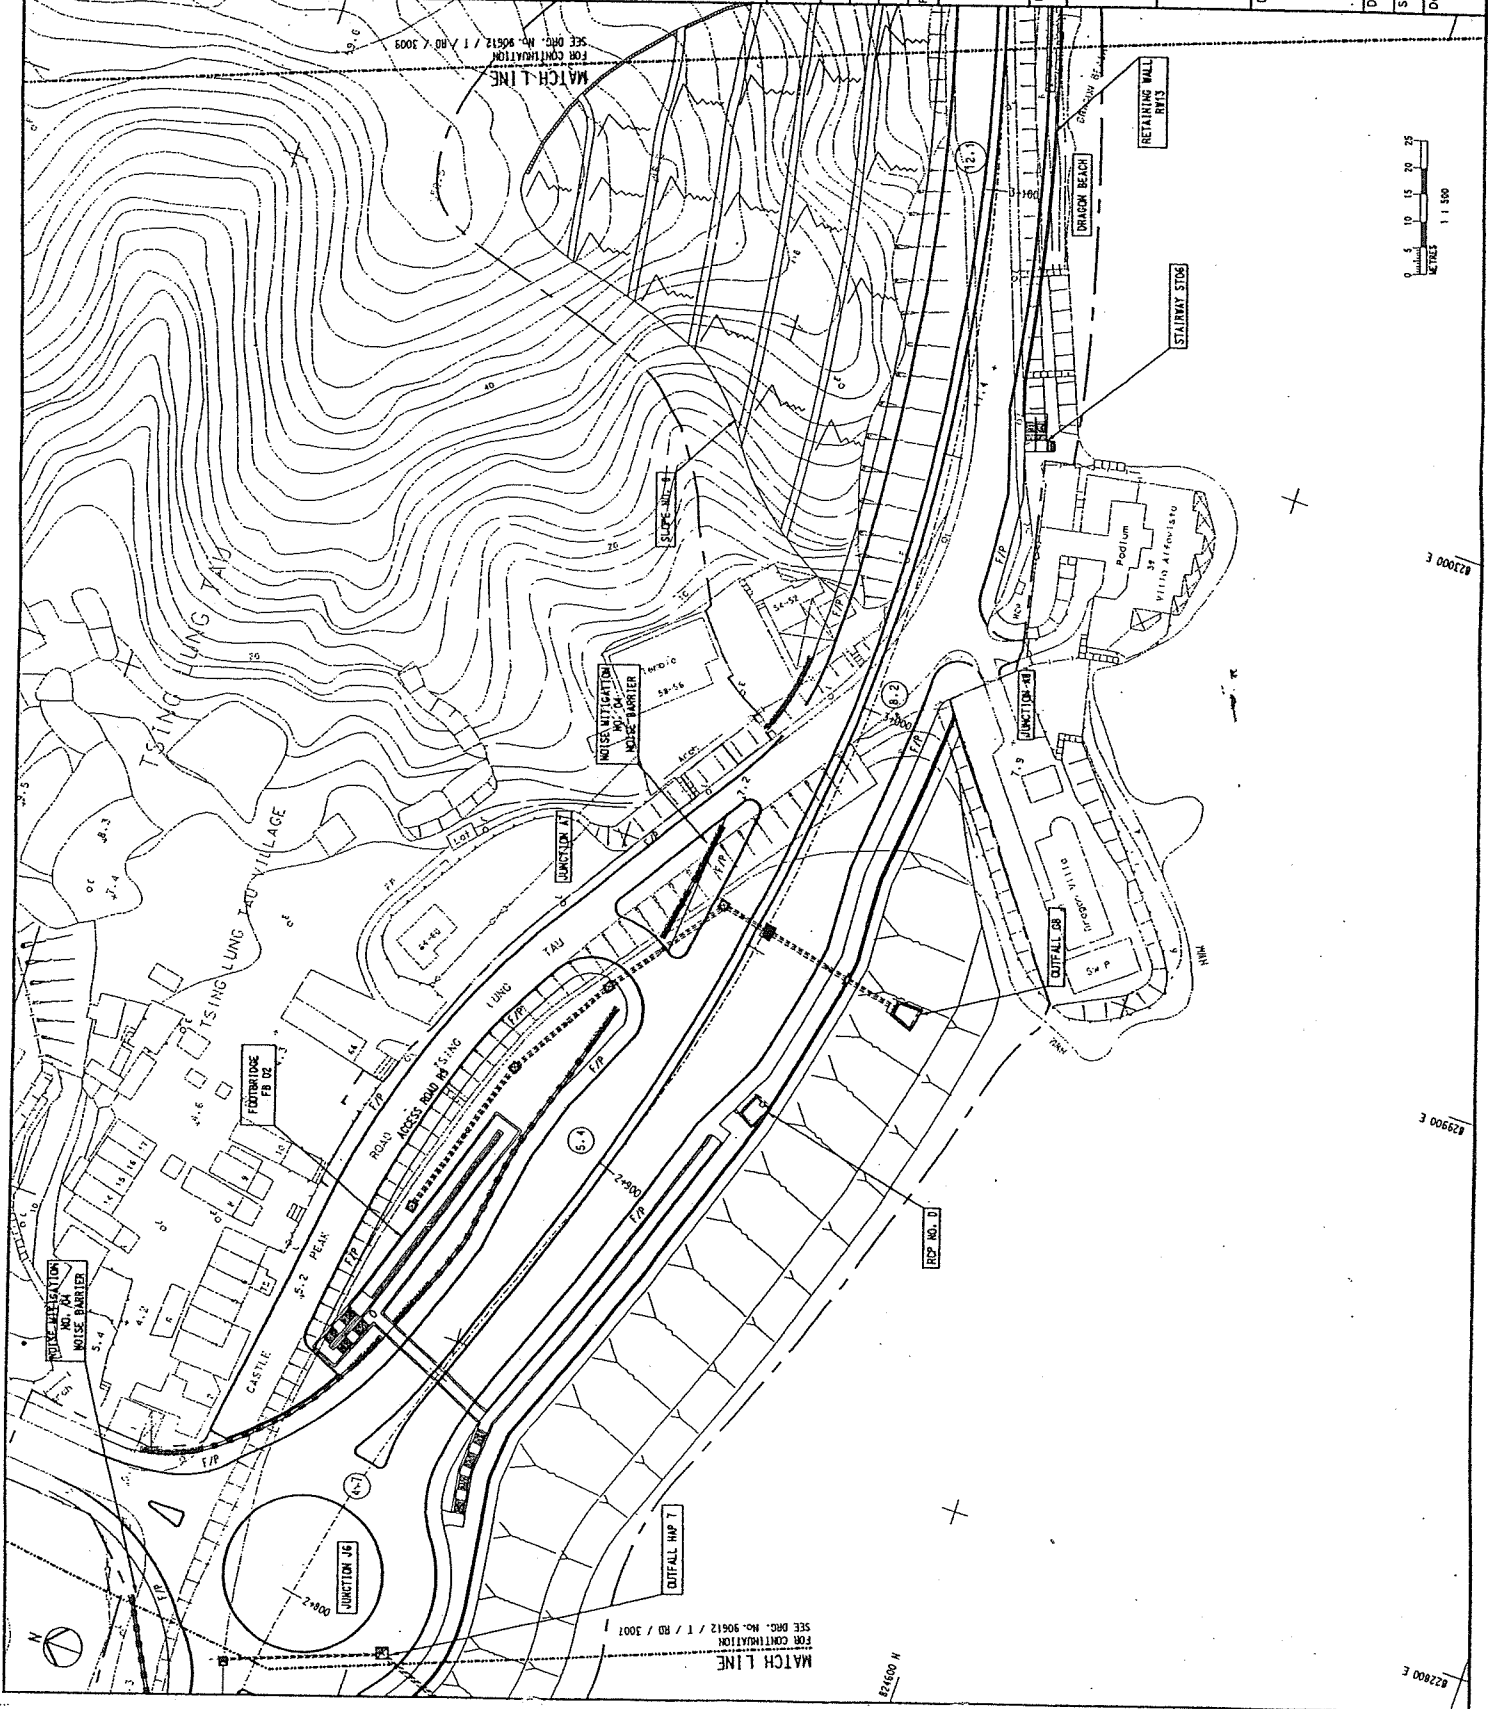

MATCH LINE  
FOR CONTINUATION  
SEE DRG. NO. 90612 / T / RD / 3001

MATCH LINE  
FOR CONTINUATION  
SEE DRG. NO. 90612 / T / RD / 3003

82800 E

42900 E

83000 E

NOTES

1. FOR GENERAL NOTES AND LEGEND REFER TO DRAWING NO. 90612 / T / RD / 3001.

CONTRACT DRAWING

B	2nd Issue	Contract Issue	SP	RC	21/11
A	First Issue	Tender Issue	SP	DC	PS JUN 01
Rev	Issue	Amendment	By	CHK	App
	Slotted				Date

Major Works Project Management Offices,  
Highways Department,  
Hong Kong

Project No. 6553TH Contract No. HY / 99 / 18

Mouchel Halcrow JV


Sub-Consultants  
ACL Asia, MYA Asia Ltd.,  
Townland Consultants Ltd., Chesterton Petty Ltd.  
Contract Title

Castle Peak Road Improvement Between  
Sham Tseng and Ka Loon Tsuen, Tsuen Wan


Drawing Title

SCHEME GENERAL ARRANGEMENT  
CHAINAGE 3130 TO 3430

Drawn	WDD	Checked	JWTL	Approved	PS
Scale	1:1,500	CAD File No.	RD3009.DGN	Date	JUNE 2001
Date Issued	JUNE 2001	Drawing No.	90612/T/RD/3009	Rev	B

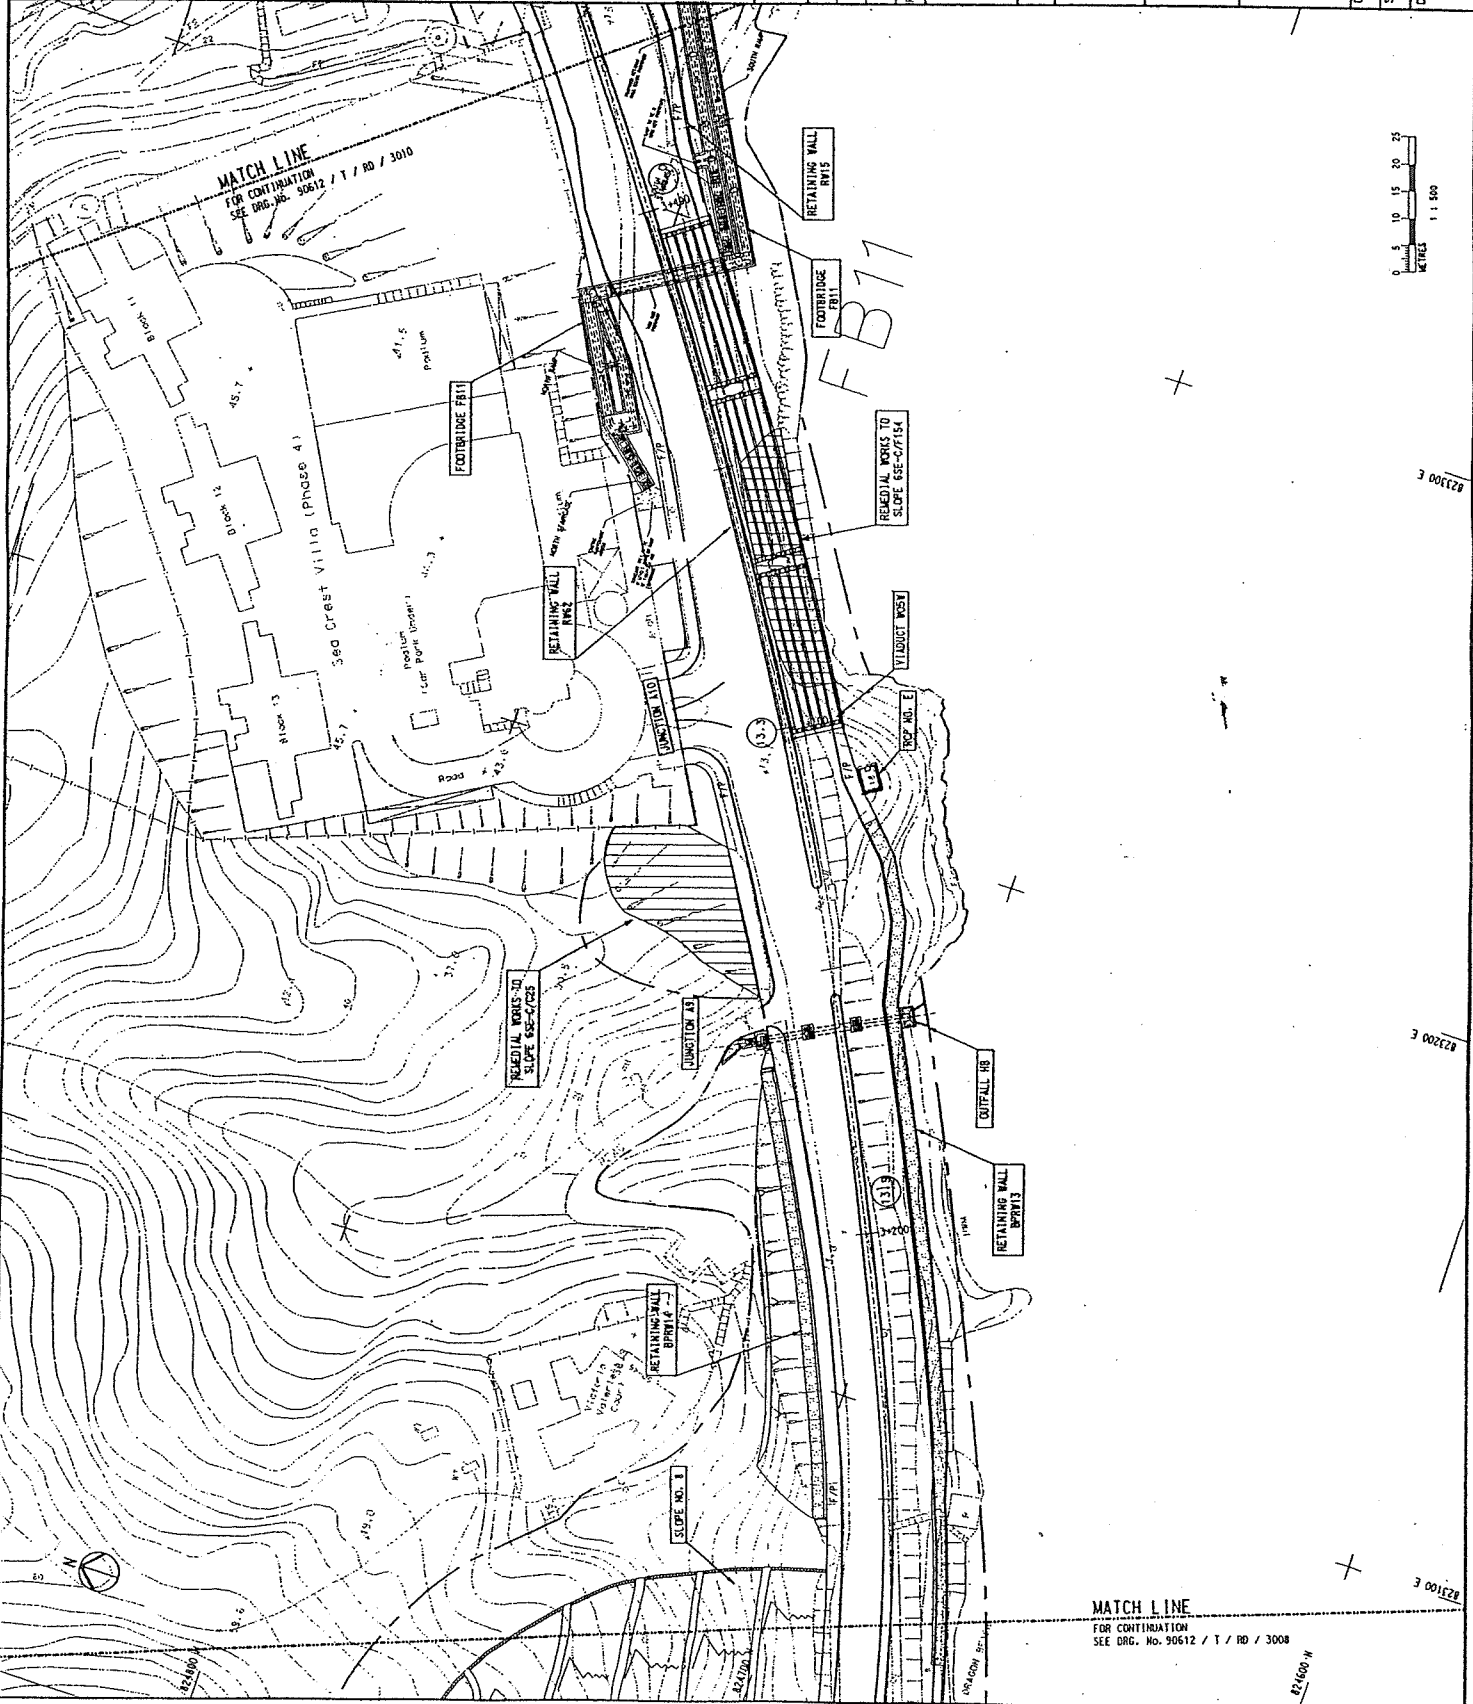

MATCH LINE  
FOR CONTINUATION  
SEE DRG. No. 90612 / T / RD / 3008



82300 E

82300 E

82400 N

NOTES

1. FOR GENERAL NOTES AND LEGEND REFER TO DRAWING NO. 90612 / T / RD / 3001.

CONTRACT DRAWING

B	2nd Issue	Contract Issue	SP	DC	PS	JUN 0
A	First Issue	Tender Issue	SP	DC	PS	JUN 0
Rev	Issue	Amendment	By	Chk.	App.	Date
0001						

Major Works Project Management Office,  
Highways Department,  
Hong Kong



Project No. 6553TH Contract No. HY / 99 / 18

**Mouchel Halcrow JV**

Sub-Consultants  
ACL Asia, MYA Asia Ltd.,  
Townland Consultants Ltd., Chesterton Pety Ltd.


Contract Title  
Castle Peak Road Improvement Between  
Sham Tseng and Ka Loon Tsuen, Tsuen Wan

Drawing Title

SCHEME GENERAL ARRANGEMENT  
CHAINAGE 3+30 TO 3730


Drawn	WDD	Checked	JWTL	Approved	PS
Scale	1:500	CAD File No.	RD3010.DGN	Date	JUNE 2001
Date Issued		Drawing No.			

Rev. JUNE 2001 90612/T/RD/3010 B

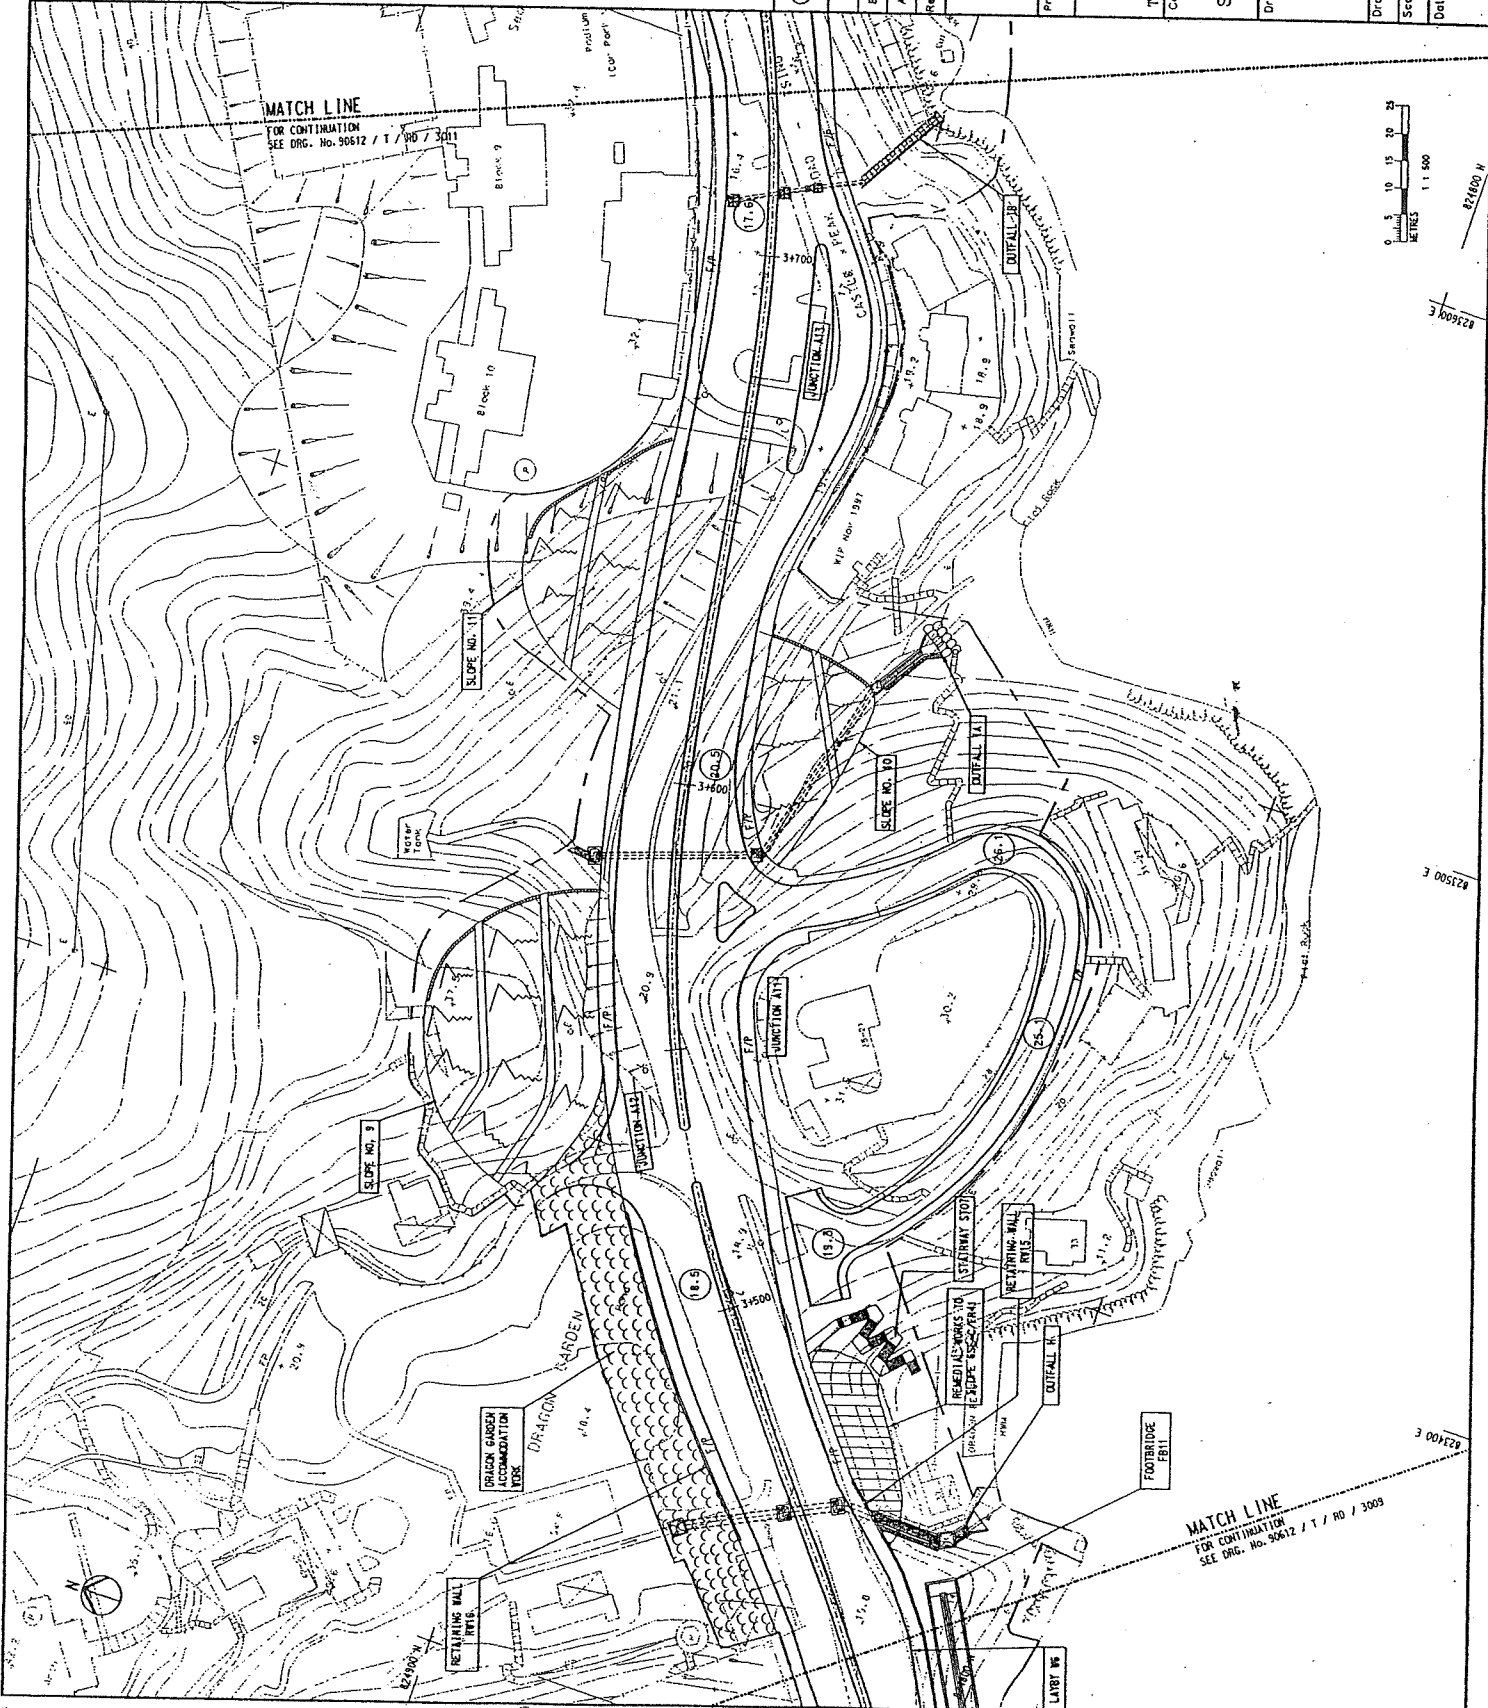

MATCH LINE  
FOR CONTINUATION  
SEE DRG. No. 90612 / T / RD / 3011

MATCH LINE  
FOR CONTINUATION  
SEE DRG. No. 90612 / T / RD / 3009



**NOTES**

1. FOR GENERAL NOTES AND LEGEND REFER TO DRAWING No. 90612 / T / RD / 3001.

**CONTRACT DRAWING**

B	2nd Issue	Contract Issue	SP	DC	PS	JUN 01	5/17/01
A	First Issue	Tender Issue	SP	DC	PS	JUN 01	
Rev	Issue	Issue	By	Chk	App	Date	
	0100	Amendment					

**MW** Major Works Project Management Office,  
Highways Department,  
Hong Kong

Project No. 6553TH Contract No. HY / 99 / 18

**Mouchel Halcrow - JV**


Sub-Consultants  
ACL Asia, MYA Asia Ltd.,  
Townland Consultants Ltd., Chesterton Petty Ltd.

Contract Title  
Castle Peak Road Improvement Between  
Sham Tseng and Ka Loon Tsuen, Tsuen Wan

Drawing Title

SCHEME GENERAL ARRANGEMENT  
CHAINAGE 3730 TO 4060

Drawn	WDD	Checked	JWTL	Approved	FS
Scale	1:1500	CAD File No.	R03011.DGN	Date	JUNE 2001
Date Issued	JUNE 2001	Drawing No.	90612 / T / RD / 3011	Rev	B

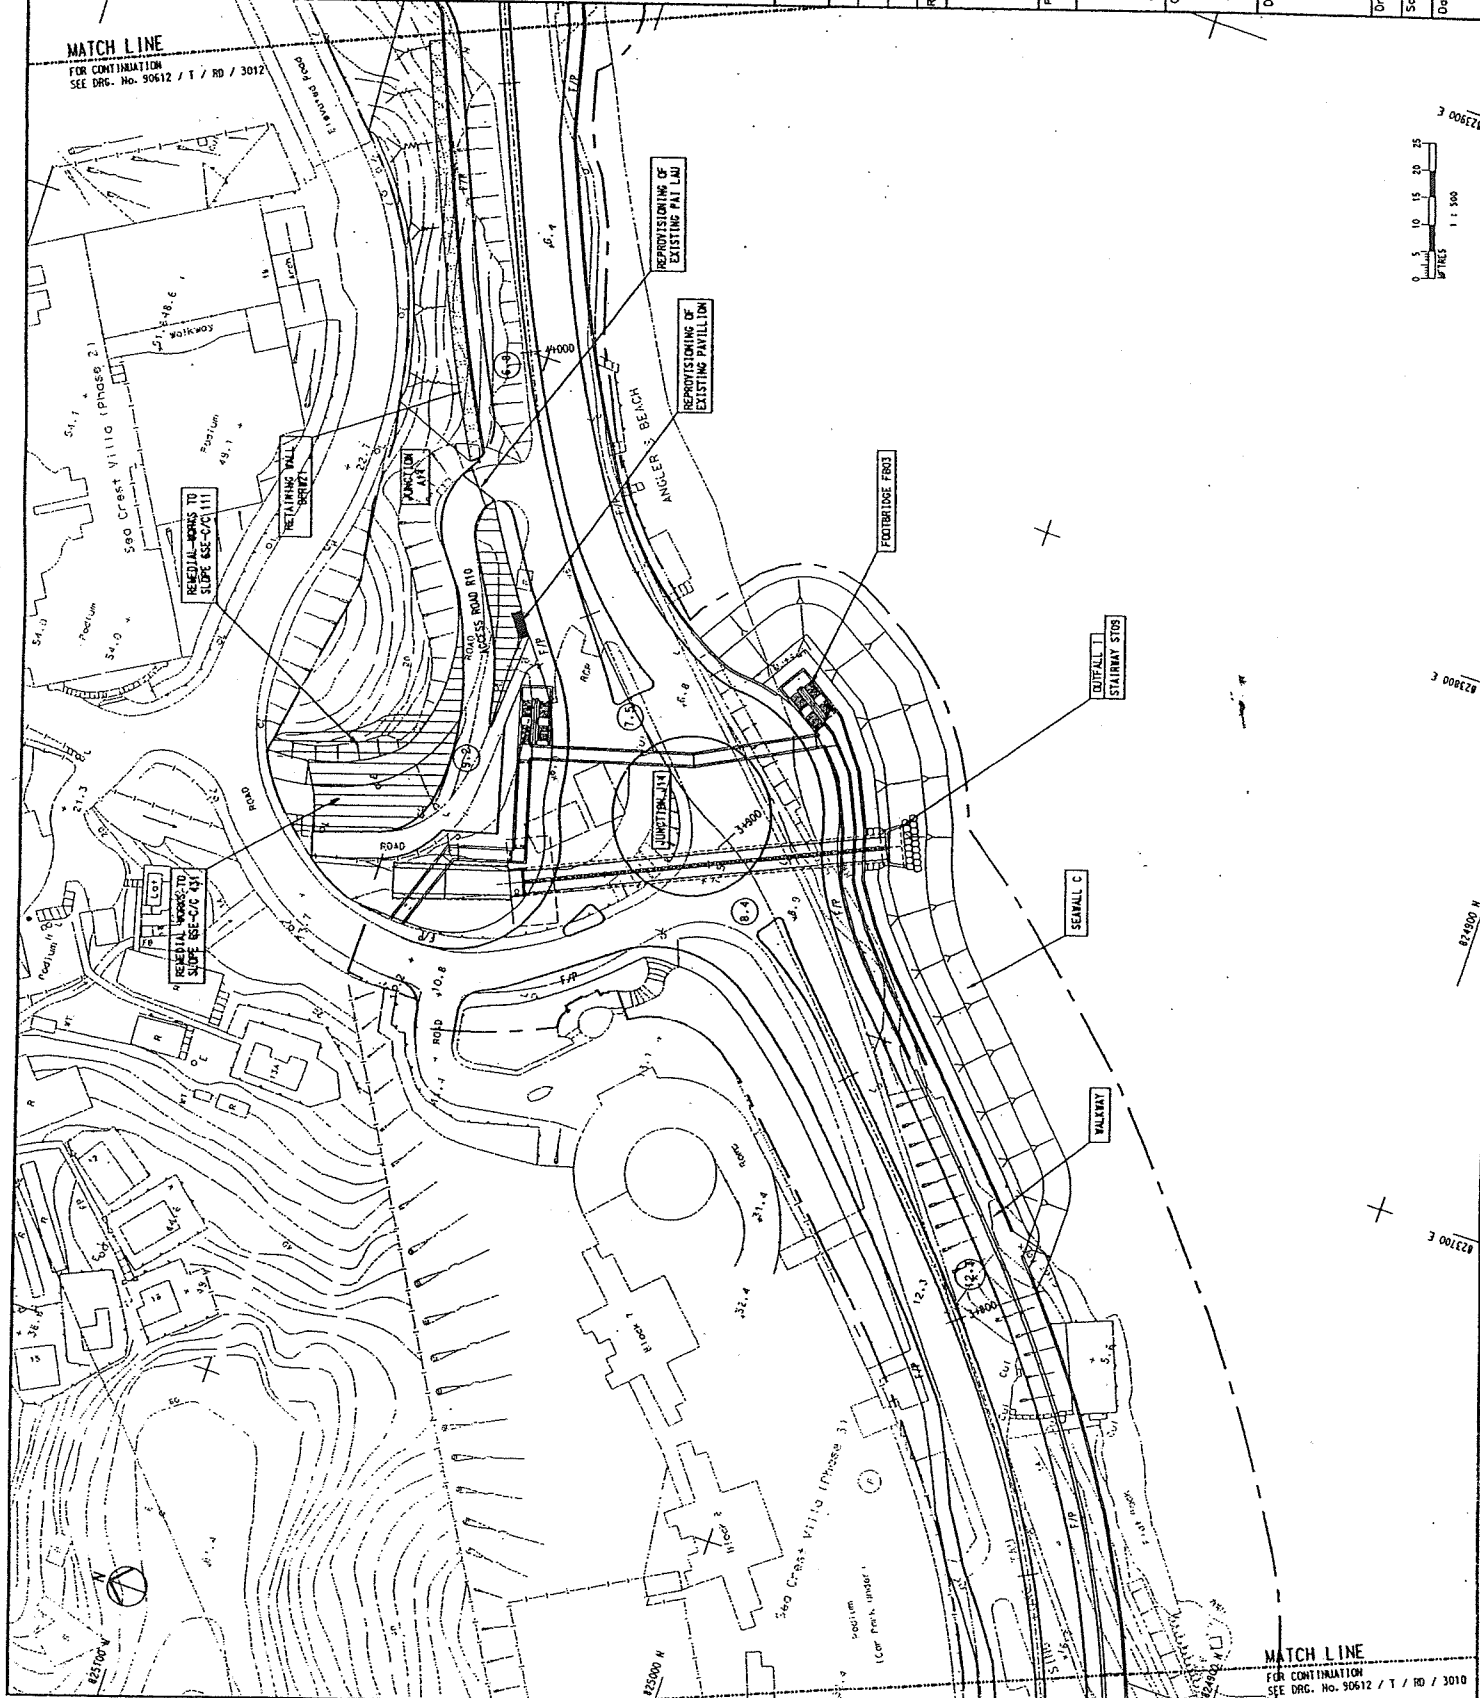

MATCH LINE  
FOR CONTINUATION  
SEE DRG. No. 90612 / T / RD / 3012

MATCH LINE  
FOR CONTINUATION  
SEE DRG. No. 90612 / T / RD / 3010

**NOTES**

1. FOR GENERAL NOTES AND LEGENDS REFER TO DRAWING NO. 90612 / 1 / RD / 3001.

**CONTRACT DRAWING**

2nd Issue	Contract Issue	SP	DC	PS	JUN C
1st Issue	Tender Issue	SP	DC	PS	JUN C
Rev. Issue	Amendment	By	Chk.	App.	Date
Rev. Issue	Amendment				

Major Works Project Management Office,  
Highways Department,  
Hong Kong



Project No. 6553TH Contract No. HY / 99 / 18

**Mouchel Halcrow JV**  
Sub-Consultants  
ACL Asia, MYA Asia Ltd.,  
Townland Consultants Ltd., Chesterton Petty Ltd.

Contract Title  
Castle Peak Road Improvement Between  
Sham Tseng and Ka Loon Tsuen, Tsuen Wan

Drawing Title  
SCHEME GENERAL ARRANGEMENT  
CHAINAGE 4060 TO 4370

Drawn	WDD	Checked	JWTL	Approved	PS
Scale	1:500	CAD File No.	RD3012.DGN	Date	JUNE 2001
Date Issued	JUNE 2001	Drawing No.	90612 / 1 / RD / 3012	Rev.	B

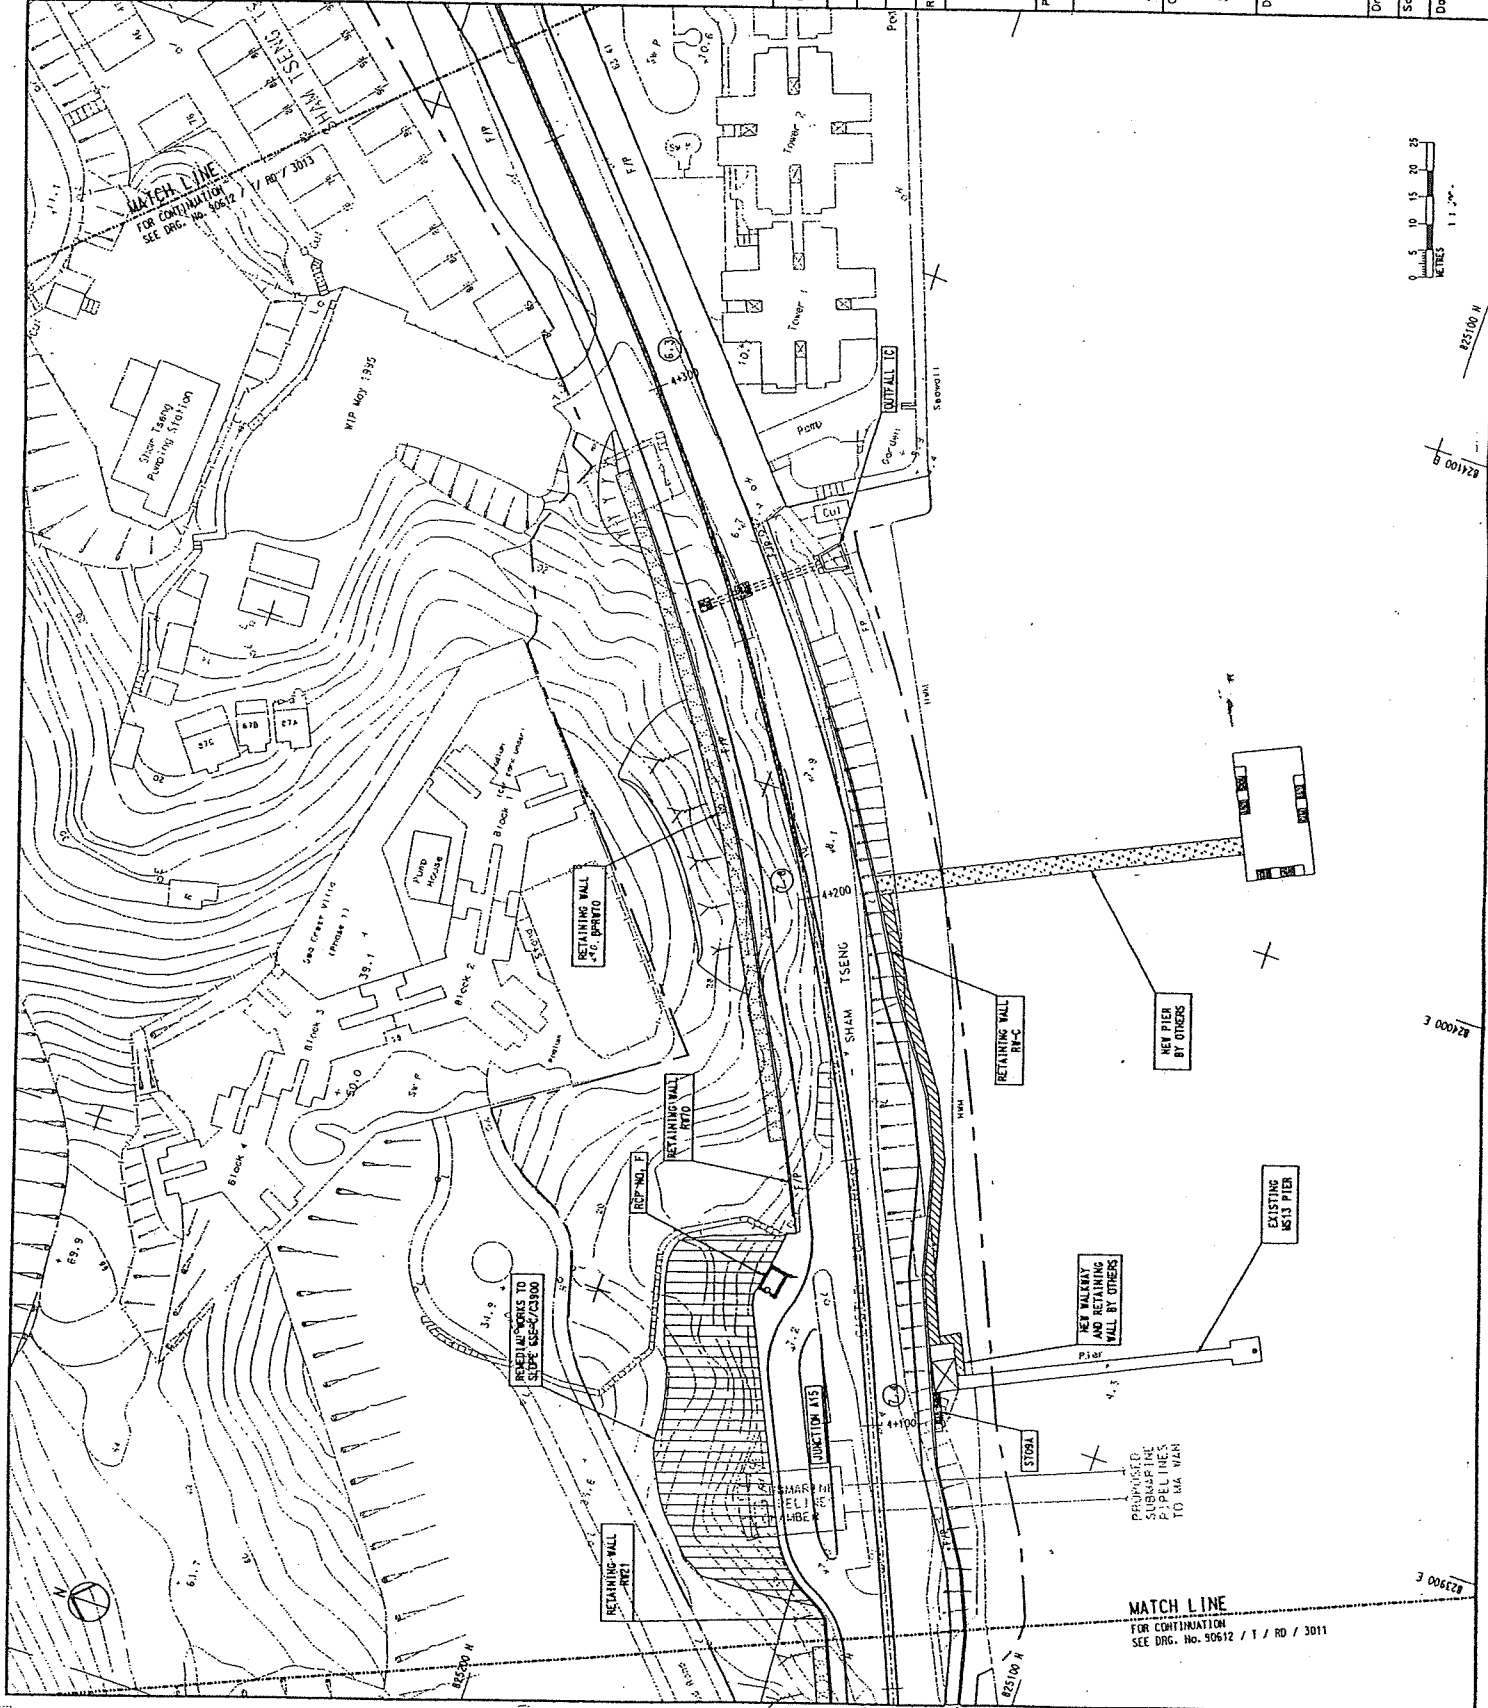

825100 N  
825100 E

825100 N  
825100 E

825100 N  
825100 E

825100 N  
825100 E

825100 N  
825100 E

825100 N  
825100 E

825100 N  
825100 E

825100 N  
825100 E

825100 N  
825100 E

825100 N  
825100 E

825100 N  
825100 E

825100 N  
825100 E

**MATCH LINE**  
FOR CONTINUATION  
SEE DRG. NO. 90612 / 1 / RD / 3011

**NOTE**

1. FOR GENERAL NOTES AND LEGEND REFER TO DRAWING NO. 90612 / T / RD / 3001.

**CONTRACT DRAWING**

B	2nd Issue	Contract Issue	SP	RC	A	5/1/01
A	First Issue	Tender Issue	SP	DC	PS	JUN 01
Rev	Issue	Amendment	By	Joh	App	Date
Statud						

Major Works Project Management Office,  
Highways Department,  
Hong Kong

Project No. 6553TH Contract No. HY / 99 / 18

**Mouchel Halcrow - JV**



Sub-Consultants  
ACL Asia, MVA Asia Ltd,  
Townland Consultants Ltd, Chesterton Petty Ltd.

Contract Title  
Castle Peak Road Improvement Between  
Sham Tseng and Ka Loon Tsuen, Tsuen Wan

Drawing Title

**SCHEME GENERAL ARRANGEMENT  
CHANNAGE 4370 TO 4470**

Drawn	WDD	Checked	JWTL	Approved	PS
Scale	1:500	CAD File No.	RD3001.DGN	Date	JUNE 2001
Date Issued	JUNE 2001	Drawing No.	90612 / T / RD / 3013	Rev.	B

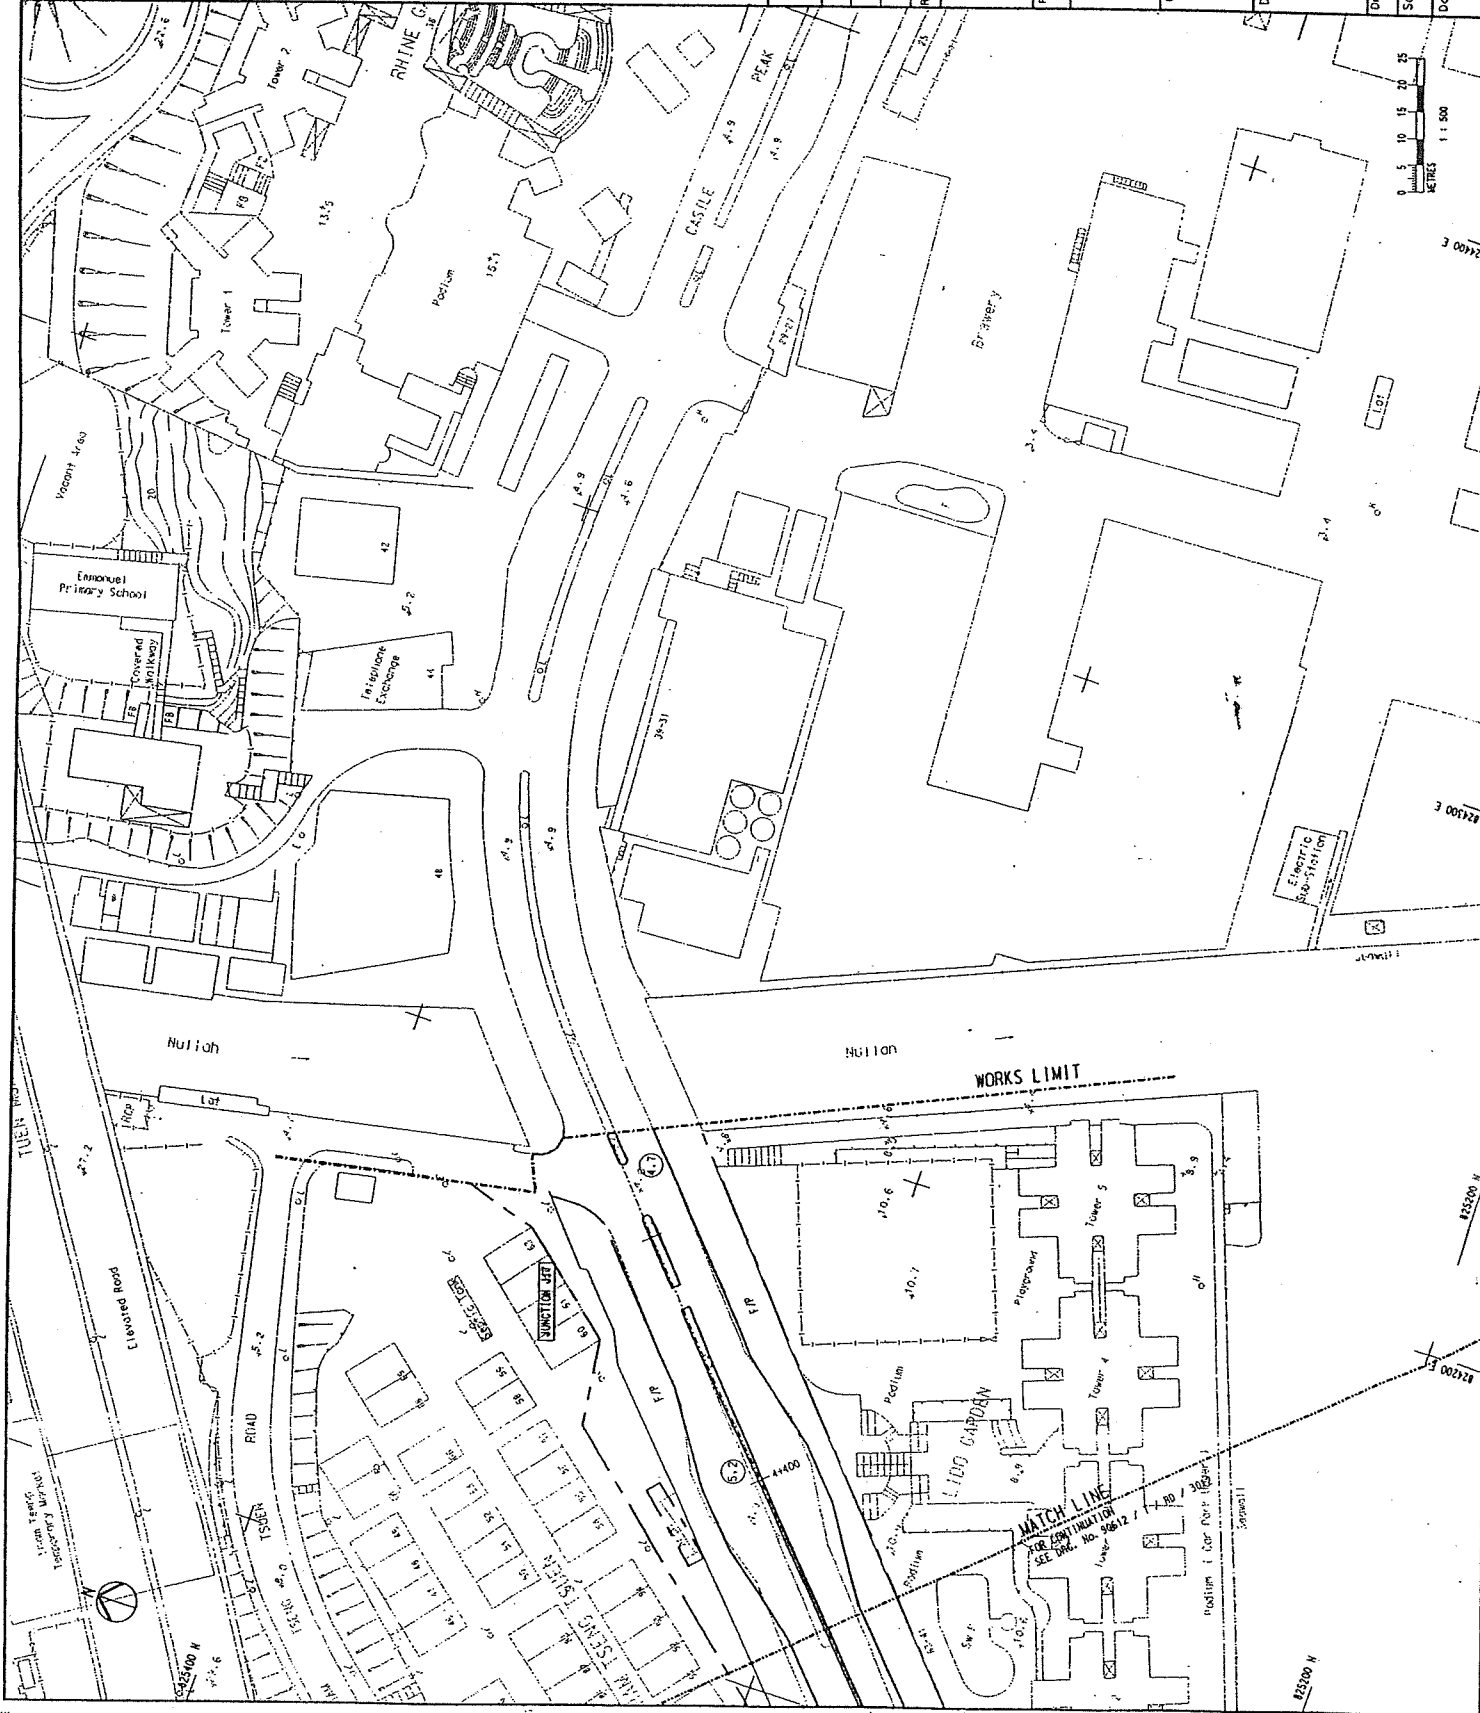

APPENDIX B  
**Construction  
programme**

---





Activity ID	Activity Description	Orig Dur	Early Start	Early Finish	Total Float	2005															
						MAY	JUN	JUL	AUG												
						2	9	16	23	30	6	13	20	27	4	11	18	25	1	8	15

### CPR Improvement bet Sham Tseng & Ka Loon Tsuen

#### Important Dates

Portions Handover Dates:					
00-V06	Handover Portion No. 6 to Employer	0		18JUL05*	0
00-V07	Handover Portion No. 7 to Employer	0		18JUL05*	0

#### 1. Preliminaries

Planning & Programming					
01-0108	Maintain Programming & Submil Progress Reports	1,236	24NOV01A	31OCT05	0

Waste Management					
01-1166	Implement & Monitor WMP	1,171	21DEC01A	31AUG05	0

Maintenance of Traffic Flow					
01-1153	Maintain Traffic Flow	1,171	24NOV01A	31AUG05	0

Environmental Monitoring & Audit					
01-11702	Implement & Maintain Impact Monitor & Audit	1,601	08MAR02A	31OCT06	0

Interfacing and Coordination					
01-1173	Coordination/Integration with Interfacing Works	1,171	01DEC01A	31AUG05	0
01-1174	Provide Reasonable Access to Other Contractors	1,171	01DEC01A	31AUG05	0


#### 16. Site Safety

Safety Management System					
16-1612	Implement & Maintain Safety Management System	1,151	14DEC01A	31AUG05	0

### CPR from Chainage 0+900 to Chainage 1+870

#### 1. Preliminaries

Proposed Utility Works					
01-120266	Proposed CATV on E/B C.way CH1800-1860	8	05AUG04A	20MAY05	85
01-12071	Proposed HKT on W/B C.way CH1205-1464	13	09APR05A	19MAY05	-15
01-12072	Proposed CLP on W/B C.way CH1205-1464	13	14APR05A	23MAY05	-15
01-12083	Proposed HKBN on W/B C.way CH1205-1464	13	14APR05A	20MAY05	-15
01-1207	Proposed CATV on W/B C.way CH1205-1464	13	15APR05A	23MAY05	-15
01-120714	HKT Cross Rd. Ducts at E/B CH1285	4	17JUN05	21JUN05	-17
01-120724	CLP Cross Rd. Ducts at E/B CH1345	4	20JUN05	23JUN05	-17
01-12054	Proposed HT on E/B C.way CH1205-1470	18	29JUN05	21JUL05	7
01-12056	Proposed CLP on E/B C.way CH1205-1470	18	07JUL05	28JUL05	7
01-121922	CLP Cross Rd. Ducts at W/B CH1555	4	14JUL05	19JUL05	-13
01-12193	Proposed HKT on W/B C.way CH1550-1700	8	14JUL05	23JUL05	-11
01-12195	Proposed HKBN on W/B C.way CH1550-1700	8	14JUL05	23JUL05	-11

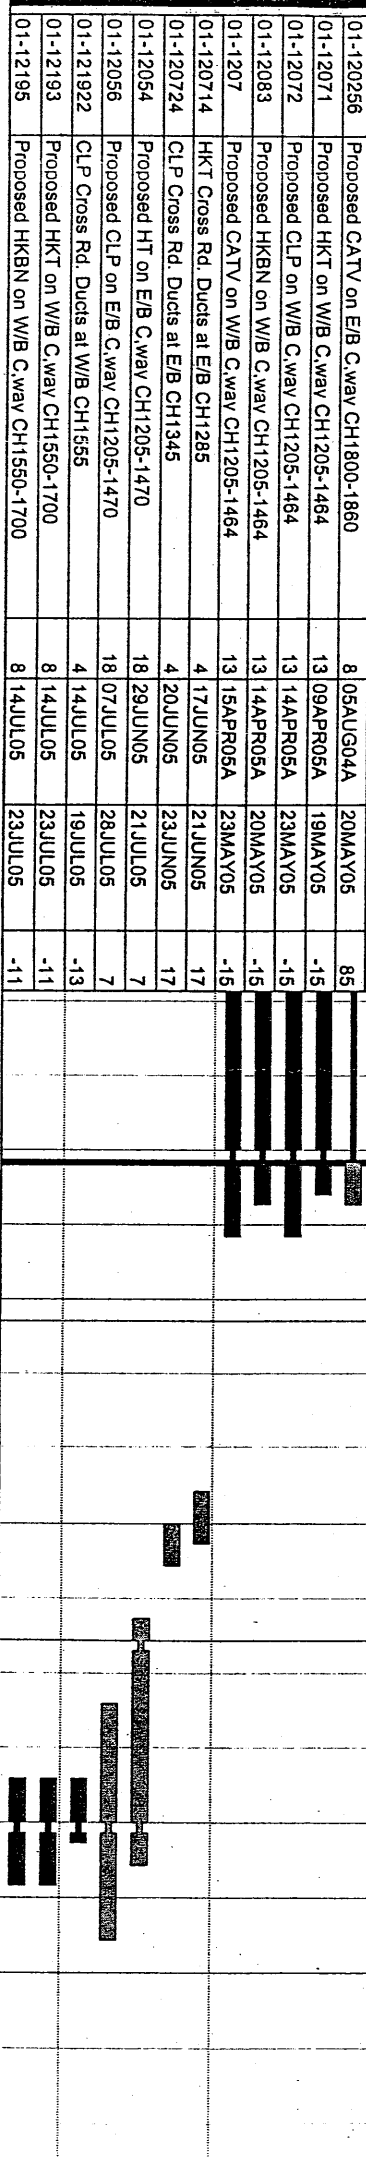

Start Date 23NOV01  
 Finish Date 19DEC06  
 Data Date 17MAY05  
 Run Date 27MAY05 10:40




W41C

Maeda Corporation

Sheet 1 of 13

HY/99/18 - Castle Peak Road Improvement

3 - Month Rolling Programme



MAEDA

May 2005

Date	Revision	Checked	Approved
20JUL03	revision 01		
17JUN03	revision 02		
17JUN04	revision 03		
23SEP04	revision 03A		
05JAN05	revision 03B		
26APR05	revision 03C		

Activity ID	Activity Description	Orig Dur	Early Start	Early Finish	Total Float	2005															
						MAY	JUN					JUL		AUG							
						2	9	16	23	30	6	13	20	27	4	11	18	25	1	8	15

**Proposed Utility Works**

01-121932	HKT Cross Rd. Ducts at W/B CH1670	4	16JUL05	21JUL05	-13																	
01-12192	Proposed CLP on W/B C.way CH1550-1700	8	20JUL05	28JUL05	-11																	
01-121933	HKBN Cross Rd. Ducts at W/B CH1680	4	20JUL05	23JUL05	-13																	
01-12197	CATV Cross Rd. Ducts at W/B CH1680	4	22JUL05	26JUL05	-13																	
01-12194	Proposed CATV on W/B C.way CH1550-1680	8	25JUL05	02AUG05	-11																	
01-12196	Proposed CATV on E/B C.way CH1680-1700	4	02AUG05	05AUG05	-6																	
01-12025	Proposed HKT on E/B C.way CH1680-1700	4	06AUG05	10AUG05	-6																	
01-120257	Proposed HKBN on E/B C.way CH1680-1700	4	11AUG05	15AUG05	-6																	
01-120242	Proposed HT on E/B C.way CH1660-1700	4	16AUG05	19AUG05	-6																	

**3. Roadworks**

**Earthworks**

03-3013	Backfill behind RW01: CH1554-1700	30	02APR05A	14JUN05	-13																	
---------	-----------------------------------	----	----------	---------	-----	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

**Drainage Works**

03-3126	Drainage along W/B Cway bet CH1550-1700	30	24MAY05	28JUN05	-13																	
03-3131	Drainage along E/B Cway bet CH1280-1464	40	26MAY05	13JUL05	7																	
03-31332	Remaining Drainage E/B CH1500-1575	12	10AUG05	23AUG05	-13																	

**Pipe Works (Local Supply Watermains)**

03-3151	Pipe Works on E/B Cway bet CH1280-1500	30	22JUN05	28JUL05	13																	
---------	--	----	---------	---------	----	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

**Road Works**

03-32182	Construct rd pave & f/r. Access Rd R8	12	22NOV04A	08JUN05	-14																	
03-32180	Demolish exst. RW2a & install Gate Bay Side Vll	39	10JAN05A	08JUN05	-14																	
03-3111	Formation/sub-base, kerbs. W/B CH1205-1464	20	04APR05A	17MAY05	-18																	
03-3112	Construct rd pave & f/r. W/B CH1205-1464	20	16APR05A	25MAY05	-17																	
03-3113	Lay sub-base, kerbs & edgings. W/B CH1464-1500	9	22APR05A	18MAY05	-18																	
03-31132	Construct rd pave & f/r. W/B CH1464-1500	6	17MAY05	23MAY05	-19																	
03-32144	Rd finishes, marking & lighting. W/B CH1205-1500	6	19MAY05	25MAY05	-19																	
03-31113	Divert Traffic to W/B C'way CH1205-1464	0		25MAY05	-19																	
03-31133	Divert Traffic to W/B C'way CH1464-1500	0		25MAY05	-19																	
03-32184	Rd finishes, marking & lighting. Access Rd R8	2	09JUN05	10JUN05	-14																	
03-3115	Formation, sub-base & edgings. W/B CH1500-1700	15	11JUL05	28JUL05	-13																	
03-3216	Formation/sub-base, kerbs. E/B CH1205-1550	25	11JUL05	09AUG05	7																	
03-31152	Construct rd pave & f/r. W/B CH1500-1700	15	19JUL05	04AUG05	-13																	
03-32162	Construct rd pave & f/r. E/B CH1205-1500	25	21JUL05	18AUG05	7																	
03-31154	Rd finishes, marking & lighting. W/B CH1500-1700	6	03AUG05	09AUG05	-13																	
03-3116	Divert Traffic to W/B Perma C'way CH1500-1700	0		09AUG05	-13																	
03-3105	Kerb/central bearer/footpath. E/B CH1500-1700	20	13AUG05	05SEP05	-14																	
03-31114	Rd finishes, marking & lighting. E/B CH1205-1500	6	17AUG05	23AUG05	7																	

**5. Footbridges**

**Footbridge FB12**

05-63806	Erect Steelwork & Roofing for FB12 (North)	30	06JAN05A	30MAY05	26																	
05-6350	Construct Ramp & Pier Head for FB12 (South)	40	14MAR05A	14MAY05A																		
05-6340	Const./Erect Deck of Main Span for FB12	45	14APR05A	04JUN05	21																	
05-63504	Construct Stairway for FB12 (South)	30	04MAY05A	14JUN05	19																	

Activity ID	Activity Description	Orig Dur	Early Start	Early Finish	Total Float
<b>Footbridge FB12</b>					
05-53402	Erect Steelwork & Roofing of Main Span for FB12	45	06JUN05	30JUL05	21
05-53506	Erect Steelwork & Roofing for FB12 (South)	30	27JUN05	02AUG05	19
05-5370	E&M and Finishing Works for Footbridge FB12	30	05JUL05	09AUG05	19
<b>6. Retaining Walls</b>					
<b>L-Shaped Walls</b>					
06-6105	Retaining Wall RW01 (CH1554-1660), 13 bays	184*	17NOV04A	04JUL05	-13
06-61051	Excavate/temp soil nailing for bays 53-65	100	17NOV04A	07MAY05A	
06-61052	Construct base/wall for bays 53-65	80	01FEB05A	01JUN05	-13
06-61054	Construct plinth for bays 53-65	26	02JUN05	04JUL05	-7
<b>7. Noise Structures</b>					
<b>Procurement of Noise Barrier</b>					
07-7060	Fabrication of Steel Members for Noise Barrier	120	17MAY04A	03JUN05	-28
07-7080	Delivery of Steel Members for Noise Barrier	90	19JUL04A	10JUN05	-28
07-7070	Fabrication of Panels for Noise Barrier	100	16MAR05A	15JUL05	18
07-7090	Delivery of Panels for Noise Barrier	90	17MAY05	14AUG05	18
<b>Noise Mitigation No. 01</b>					
07-7114	Erect Steel Members at North Supports for NM01	30	14OCT04A	28JUL05	-19
07-7123	Erect Steel Members at South Supports for NM01	30	16FEB05A	07MAY05A	
07-7111	Foundation of NM01 (N); CH1300-1350 (bays 8-10)	40	26MAY05	13JUL05	-19
07-7115	Erect Wall Panels at North Supports for NM01	30	07JUL05	11AUG05	-19
07-7130	Erect Roof Steel Members for NM01	30	22JUL05	25AUG05	-19
07-7150	Erect Roof Panels for NM01	30	05AUG05	08SEP05	-19
<b>8. Culverts and Outfalls</b>					
<b>Culvert-Outfall C</b>					
08-84029	1.5m DI pipe/Step Channel: Outside RW01	10	15APR05A	20MAY05	-15
08-8403	Excavate Culvert-Outfall C (within Exist CPR)	6	26MAY05	01JUN05	17
08-84032	Const. Culvert-Outfall C (within Exist CPR)	12	02JUN05	16JUN05	17
<b>Culvert-Outfall CB</b>					
08-81601	Exc. Culvert-Outfall CB (North of Exist CPR)	6	26MAY05	01JUN05	17
08-816012	Const. Culvert-Outfall CB (North of Exist CPR)	12	02JUN05	16JUN05	17
<b>Culvert-Outfall D</b>					
08-8503	Exc. Culvert-Outfall D (South)	6	04APR05A	19MAY05	-2
08-85032	Const. 2 Manholes & 1.5m Conc. Pipe (South)	16	26MAY05	14JUN05	-7
08-85033	Const. 1.5m Stepped Channel & Outlet (South)	12	15JUN05	28JUN05	11
<b>Culvert-Outfall E</b>					
08-8602	Outfall E (S) section behind RW01	12	23MAR05A	23MAY05	2
08-86022	Outfall E (S) Outlet	12	24MAY05	06JUN05	2
08-86023	Const. 1.5m Stepped Channel (South)	12	07JUN05	21JUN05	2
08-8603	Exc. Culvert-Outfall E (SMHE1-inlet)	18	13JUN05	04JUL05	-14
08-86032	Const. Culvert-Outfall E (SMHE1-inlet)	30	25JUN05	01AUG05	-14

Activity ID	Activity Description	Orig Dur	Early Start	Early Finish	Total Float	2005											
						MAY	JUN					JUL		AUG			
						15	22	29	05	12	19	26	02	09	16		
<b>10. Geotechnical &amp; Slope Works</b>																	
<b>Existing Slope Works</b>																	
10-102112	Remedial Works to Slope No. D/R16 (skin wall)	30	04APR05A	30MAY05	21												
<b>12. Entrusted Watermains</b>																	
<b>Entrusted Water Mains</b>																	
12-1205	DN1000FW/associated Wks (WB/C way)	30	07JUN05	13JUL05	-13												
<b>13. Reprovisioning of LCS&amp;D &amp; FEHD Facilities</b>																	
<b>FEHD Facilities</b>																	
13-1340	Reprovision of Siting Out Area at Ka Loon Tsuen	75	13SEP03A	02JUN05	74												
<b>Stairways</b>																	
13-1315	Construct Stairway ST05 & Ramp ST05A	40	02JUN05	21JUL05	-7												
13-1314	Construct Stairway ST04	30	02AUG05	05SEP05	-14												
<b>14. Landscape Works</b>																	
<b>Landscape Softworks</b>																	
14-14115	Landscape Works in Slope No. 6	40	17MAY05	04JUL05	-28												
14-14119	Landscape Works bet CPR CH1205-1705	150	17MAY05	14NOV05	-12												
14-14114	Landscape Works in Slope No. 1	30	05JUL05	09AUG05	-28												
14-14116	Landscape Works in Slopes C161 & D/C5	36	10AUG05	21SEP05	-28												
<b>18. Variation Works</b>																	
<b>Vehicular Parapets</b>																	
VO-24940	Additional Vehicular Parapets at CH 1555-1685	30	15JUN05	21JUL05	-13												
<b>CPR from Chainage 2+210 to Chainage 3+010</b>																	
<b>1. Preliminaries</b>																	
<b>Proposed Utility Works</b>																	
01-12124	Proposed CATV at E/B CH2830-2950	6	17MAY04A	18MAY05	-23												
01-12143	Proposed CATV on E/B C way CH2300-2580	14	02JUN05	18JUN05	17												
01-12145	Proposed HKT on E/B C way CH2300-2580	14	09JUN05	25JUN05	17												
01-12147	Proposed HKBN on E/B C way CH2300-2580	14	09JUN05	25JUN05	17												
01-12153	Proposed CATV on E/B C way CH2580-2800	11	09JUN05	22JUN05	12												
01-12144	Proposed HT on E/B C way CH2300-2580	14	17JUN05	04JUL05	17												
01-12155	Proposed HKT on E/B C way CH2580-2800	11	17JUN05	29JUN05	12												
01-12157	Proposed HKBN on E/B C way CH2580-2800	11	17JUN05	29JUN05	12												
01-12146	Proposed CLP on E/B C way CH2300-2580	14	24JUN05	11JUL05	17												
01-12154	Proposed HT on E/B C way CH2580-2800	11	24JUN05	07JUL05	12												
01-12156	Proposed CLP on E/B C way CH2580-2800	11	02JUL05	14JUL05	12												
<b>Programme for SA No. 3</b>																	
01-0110	Programme for SA No. 3	609*	29SEP03A	29MAY05	-10												
01-0118	Prepare final SA	12	25NOV03A	22MAY05	0												
01-0119	Prepare formal copies of SA for execution SA	7	23MAY05	29MAY05	0												
01-01110	Execute SA	0		29MAY05	0												

Activity ID	Activity Description	Orig Dur	Early Start	Early Finish	Total Float
-------------	----------------------	----------	-------------	--------------	-------------

### 3. Roadworks

#### Earthworks

03-3204	Backfill/Road formation at E/B CH2300-2580	30	06APR05A	01JUN05	17
03-3205	Road formation at E/B C'way CH2580-2800	30	09JUN05	15JUL05	5

#### Drainage Works

03-32262	Drainage Works at Access Road R9 at East	20	01APR05A	25MAY05	9
03-32252	Drainage Works at E/B CH2580-2610/CH2695-2750	30	08APR05A	06JUN05	14
03-32243	Drainage/F.4.1-4.3 at E/B CH2480-2580	25	11APR05A	23MAY05	21
03-3226	Drainage Works at Access Road R9 at West	20	26MAY05	18JUN05	-23
03-32263	Drainage Works at Access Road R9 at Middle	20	26JUL05	17AUG05	-23

#### Pipe Works (Local Supply Watermains)

03-32365	Additional DN600 Watermain along Access Road R9	30	19MAY05	23JUN05	-11
03-3235	Pipe Works on E/B C'way bet CH2610-2720	16	02JUN05	21JUN05	5
03-3236	Pipe Works on at Access Road R9 at West	12	04JUN05	18JUN05	-23
03-32352	Testing & Connection of Pipeworks at CH2610-2720	18	22JUN05	13JUL05	5
03-32366	Testing & Connection for add. DN600 at R9/46	18	02JUL05	23JUL05	-17

#### Road Works


03-3148	Lay sub-base, kerbs & edgings: E/B CH2300-2580	18	25APR05A	11JUL05	17
03-3160	Formation/ sub-base, kerbs: Access Rd R9 at West	12	04JUN05	18JUN05	-23
03-31602	Construct rd pave & f/tp: Access Rd R9 at West	8	20JUN05	28JUN05	-23
03-31482	Construct rd pave & f/tp: E/B CH2300-2580	18	27JUN05	19JUL05	17
03-316022	Divert Access to Villagers from West of R9	1	29JUN05	29JUN05	-23
03-3149	Lay sub-base, kerbs & edgings: E/B CH2580-2800	18	02JUL05	23JUL05	5
03-31448	Reinstate E/B carriageway at CH2210-2300	6	12JUL05	19JUL05	17
03-31492	Construct rd pave & f/tp: E/B CH2580-2800	18	12JUL05	02AUG05	5
03-31484	Rd finishes, marking & lighting: E/B CH2300-2580	6	20JUL05	26JUL05	17
03-31494	Rd finishes, marking & lighting: E/B CH2580-3010	6	09AUG05	15AUG05	0
03-3143	Divert Traffic to E/B Perm. C'way CH2210 - 3010	0		15AUG05	0
03-31454	Rd finishes, marking & lighting: W/B CH2300-3010	14	16AUG05	31AUG05	0

#### Junction J5 (at Hong Kong Garden)

J5-04	Expose existing UUs at eastern lane of slip rd	12	12APR05A	18MAY05	4
J5-06	Const. drainage within eastern lane of slip rd	18	02MAY05A	27MAY05	4
J5-08	Lay UU cross rd	12	28MAY05	10JUN05	4
J5-10	Const. eastern lane of slip rd	12	04JUN05	18JUN05	4
J5-12	Close western lane of slip road to HK Garden	1	20JUN05	20JUN05	4
J5-14	Expose existing UUs at western lane of slip rd	12	21JUN05	05JUL05	4
J5-16	Const. drainage both storm & sewer at west lane	18	28JUN05	20JUL05	4
J5-18	Lay UU cross rd	12	13JUL05	27JUL05	4
J5-20	Const. western lane of slip rd	12	21JUL05	03AUG05	4

#### Junction J6 (at Lung Yu Road)

J6-04	Expose existing UUs at eastern lane	12	17FEB05A	18MAY05	-23
J6-06	Const. drainage both storm & sewer at east lane	18	21FEB05A	23MAY05	-23
J6-07	Additional Watermain works at Lung Yuen Rd	18	11MAY05A	01JUN05	-11
J6-08	Lay UU cross rd	12	02JUN05	16JUN05	0
J6-10	Const. eastern lane of Lung Yuen Rd	12	09JUN05	23JUN05	0

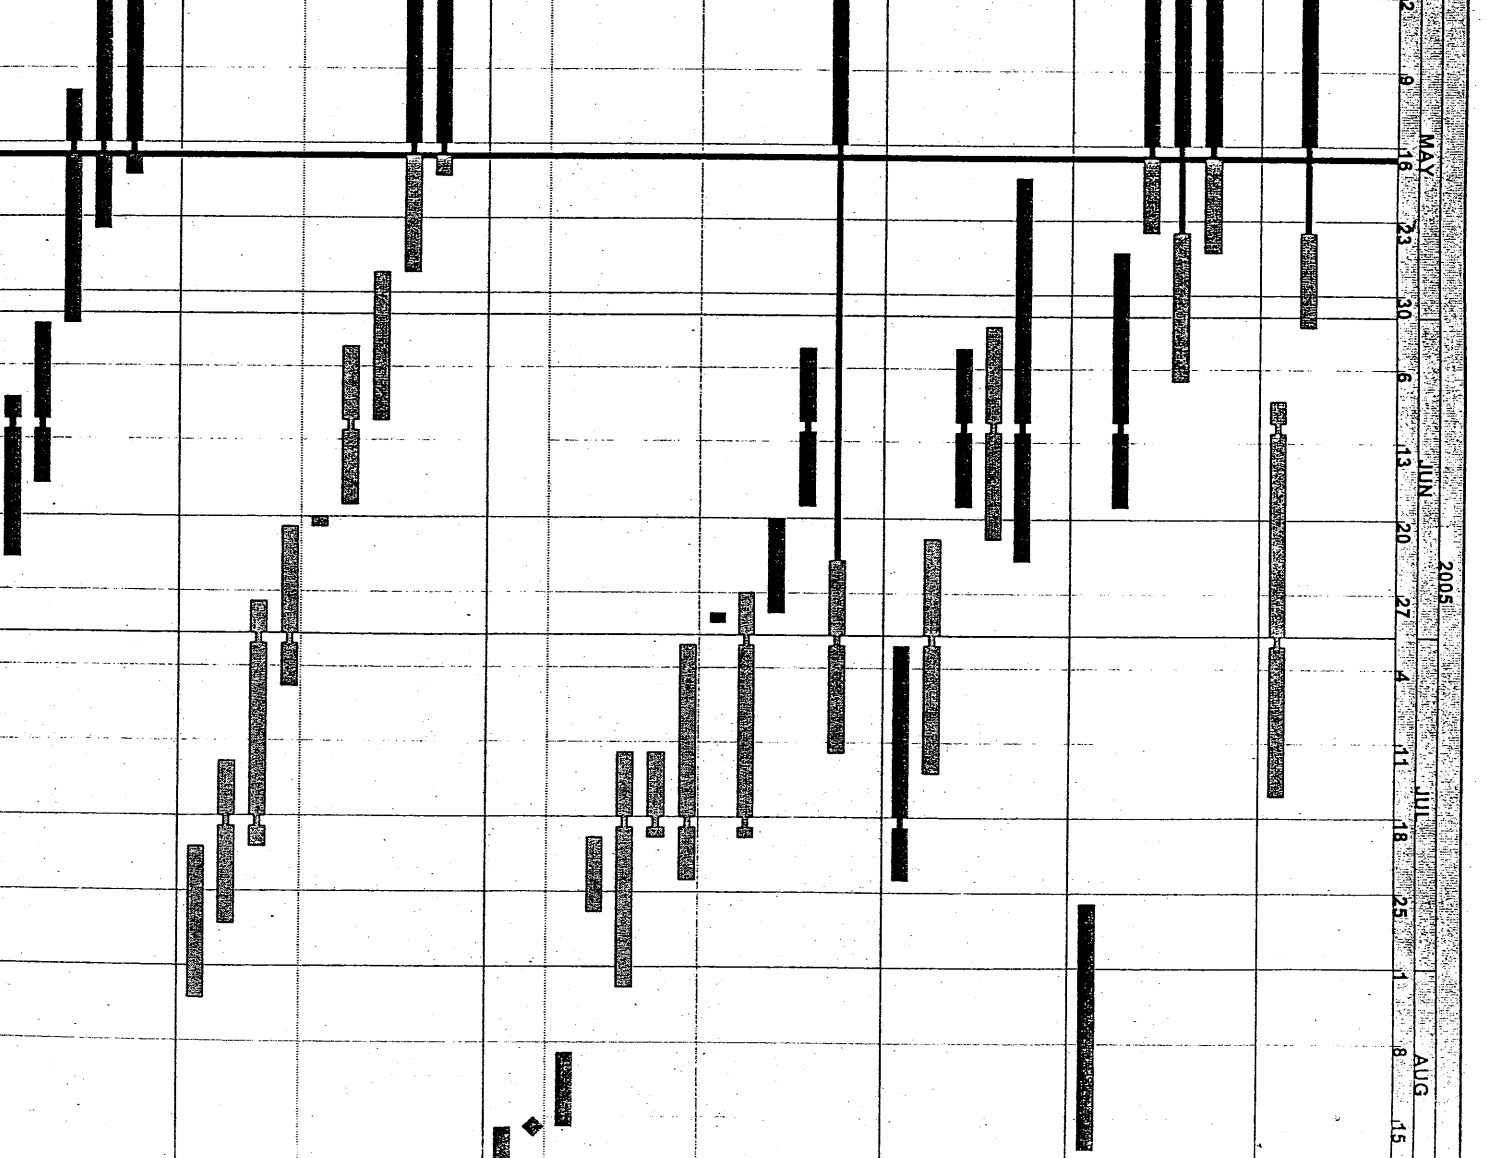



Activity ID	Activity Description	Orig Dur	Early Start	Early Finish	Total Float
-------------	----------------------	----------	-------------	--------------	-------------

**Junction J6 (at Lung Yu Road)**

J6-12	Close western lane of Lung Yuen Rd	1	24JUN05	24JUN05	0
J6-14	Expose existing UUs at western lane	12	25JUN05	09JUL05	0
J6-16	Const. drainage both storm & sewer at west lane	18	04JUL05	25JUL05	0
J6-18	Lay UU cross rd	12	19JUL05	01AUG05	0
J6-20	Const. wester lane of Lung Yuen Rd	12	26JUL05	08AUG05	0

**5. Footbridges**

**Footbridge FB01**

05-5130	North Pile caps for FB01: 5 Nos.	25	04APR05A	20MAY05	-8
05-51302	North Columns & Column head for FB01: 9 Nos.	35	20APR05A	06JUN05	-10
05-5140	Const./Erect Deck of Main Span for FB01	45	29APR05A	18JUN05	1
05-5160	Construct Ramp for FB01 (North)	45	07JUN05	01AUG05	-10
05-51402	Erect Steelwork & Roofing of Main Span for FB01	30	20JUN05	26JUL05	1
05-51604	Construct Stairway for FB01 (North)	30	25JUN05	01AUG05	-10
05-51606	Erect Steelwork & Roofing for FB01 (North)	30	02AUG05	05SEP05	-10
05-5170	E&M and Finishing Works for Footbridge FB01	30	09AUG05	12SEP05	-10

**7. Noise Structures**

**Noise Mitigation No. 02**

07-7221	Foundation of NM02 (North)	84*	19JAN05A	04MAY05A	
07-72218	Const. R.C. barriers/columns: NM02 (Bays 14-23)	24	04APR05A	04MAY05A	
07-72217	Const. R.C. barriers/columns: NM02 (Bays 24-26)	18	11APR05A	17MAY05	27
07-7212	Erect Steel Members at North Supports for NM02	30	07MAY05A	25MAY05	27
07-7230	Erect Roof Steel Members for NM02	30	09MAY05A	02JUN05	29
07-7213	Erect Wall Panels at North Supports for NM02	30	26MAY05	30JUN05	27
07-7240	Erect Roof Panels for NM02	30	09JUN05	15JUL05	27
07-7250	E&M Works for NM02	30	24JUN05	30JUL05	27

**Noise Mitigation No. 03**

07-7321	Foundation of NM03 (North)	82*	21FEB05A	01JUN05	-3
07-73214	Construct base for NM03 (North)	30	28FEB05A	10MAY05A	
07-73216	Construct wall stem for NM03 (North)	30	14MAR05A	23MAY05	-3
07-73218	Const. R.C. barriers/columns: NM03 (North)	24	30APR05A	01JUN05	-3
07-7312	Erect Steel Members at North Supports for NM03	30	02JUN05	08JUL05	-3
07-7330	Erect Roof Steel Members for NM03	30	17JUN05	23JUL05	-3
07-7313	Erect Wall Panels at North Supports for NM03	30	02JUL05	06AUG05	-3
07-7340	Erect Roof Panels for NM03	30	16JUL05	20AUG05	-3
07-7350	E&M Works for NM03	30	01AUG05	03SEP05	-3

**Noise Mitigation No. 04**

07-740413	Sub Column of NM04 (bays 12-13)	8	13MAY05A	23MAY05	23
07-74042	Sub Columns of NM04 (bays 1-4)	8	17MAY05	25MAY05	21
07-7408	Erect Frame for NM04 (bays 1-4 & 12-13)	30	26MAY05	30JUN05	21
07-74072	Erect Panels for NM04	30	02JUL05	06AUG05	21

**8. Culverts and Outfalls**

**Culvert-Outfall GB**

08-89202	Culvert-Outfall GB (remaining): VO165	25	17MAY05	15JUN05	9
----------	---------------------------------------	----	---------	---------	---

Activity ID	Activity Description	Orig Dur	Early Start	Early Finish	Total Float	2005															
						MAY	JUN			JUL			AUG								
						2	9	16	23	30	6	13	20	27	4	11	18	25	1	8	15
<b>9. Seawalls and Marine Works</b>																					
<b>L-Shaped Walls</b>																					
09-91331	Reprovision of Pavillion at Sea Wall B	570'	19JUN03A	23MAY05	-23	[Gantt bar from 19JUN03A to 23MAY05]															
09-91333	Roofing/staircase/flooring & finishings	40	07JUN04A	23MAY05	83	[Gantt bar from 07JUN04A to 23MAY05]															
<b>10. Geotechnical &amp; Slope Works</b>																					
<b>Existing Slope Works</b>																					
09-921246	Drainage, Toe of Slope 6SW-D/C1 & 78/V0386G	18	03MAY05A	27MAY05	41	[Gantt bar from 03MAY05A to 27MAY05]															
<b>11. Entrusted Sewerage Works</b>																					
<b>Entrusted Sewers/Drains</b>																					
11-1132	Sewer Works at Access Road R9 at West	40	24MAR05A	25MAY05	-23	[Gantt bar from 24MAR05A to 25MAY05]															
11-11322	Sewer Works at Access Road R9 at East	40	01APR05A	25MAY05	9	[Gantt bar from 01APR05A to 25MAY05]															
11-11312	Sewer Works at CPR CH2580-2650	20	25APR05A	25MAY05	5	[Gantt bar from 25APR05A to 25MAY05]															
11-1131	Sewer Works at CPR CH2650-2750	25	26MAY05	24JUN05	5	[Gantt bar from 26MAY05 to 24JUN05]															
11-11323	Sewer Works at Access Road R9 at Middle	20	30JUN05	25JUL05	-23	[Gantt bar from 30JUN05 to 25JUL05]															
<b>12. Entrusted Watermains</b>																					
<b>Entrusted Water Mains</b>																					
12-1232	DN150 cross rd & fire hydrant at CH L600	12	03MAY05A	14MAY05A		[Gantt bar from 03MAY05A to 14MAY05A]															
12-12322	DN150 & Thrust Blocks of S.V. Chamber at CH L605	12	17MAY05	30MAY05	17	[Gantt bar from 17MAY05 to 30MAY05]															
<b>14. Landscape Works</b>																					
<b>Landscape Softworks</b>																					
14-14111	Landscape Works CH2300-3010	150	30MAY05	26NOV05	-23	[Gantt bar from 30MAY05 to 26NOV05]															
<b>18. Variation Works</b>																					
<b>Add. Fishermen's Access Staircase at Seward B</b>																					
VO-35600	Construct Fishermen's Access Staircase, VO356	18	17MAY05	06JUN05	71	[Gantt bar from 17MAY05 to 06JUN05]															
<b>CPR from Chainage 3+010 to Chainage 3+730</b>																					
<b>1. Preliminaries</b>																					
<b>Proposed Utility Works</b>																					
01-1243	Gasmain on W/B CH3300-3460 Incl. Cross Rd. Ducts	6	30MAR05A	19MAY05	-20	[Gantt bar from 30MAR05A to 19MAY05]															
01-1241	Proposed CLP on W/B C.way CH3400-3530	7	07JUN05	15JUN05	31	[Gantt bar from 07JUN05 to 15JUN05]															
01-12412	Proposed HKT on W/B C.way CH3400-3530	7	16JUN05	23JUN05	31	[Gantt bar from 16JUN05 to 23JUN05]															
01-121264	HKT Cross Rd. Ducts at E/B CH2995	4	24JUN05	28JUN05	3	[Gantt bar from 24JUN05 to 28JUN05]															
01-12433	Proposed CATV on E/B C.way CH2950-3130	9	24JUN05	05JUL05	-2	[Gantt bar from 24JUN05 to 05JUL05]															
01-124022	CATV Cross Rd. Ducts at E/B CH3030	4	29JUN05	04JUL05	3	[Gantt bar from 29JUN05 to 04JUL05]															
01-12435	Proposed HKT on E/B C.way CH2950-3130	9	02JUL05	12JUL05	-2	[Gantt bar from 02JUL05 to 12JUL05]															
01-12437	Proposed HKBN on E/B C.way CH2950-3130	9	02JUL05	12JUL05	-2	[Gantt bar from 02JUL05 to 12JUL05]															
01-124023	HT Cross Rd. Ducts at E/B CH3035	4	05JUL05	08JUL05	3	[Gantt bar from 05JUL05 to 08JUL05]															
01-124002	CLP Cross Rd. Ducts at E/B CH3080	4	09JUL05	13JUL05	3	[Gantt bar from 09JUL05 to 13JUL05]															
01-12434	Proposed HT on E/B C.way CH2950-3130	9	09JUL05	20JUL05	-2	[Gantt bar from 09JUL05 to 20JUL05]															
01-12438	NWT Cross Rd. Ducts at E/B CH3290-3310	6	09JUL05	15JUL05	-2	[Gantt bar from 09JUL05 to 15JUL05]															
01-125562	CLP Cross Rd. Ducts at E/B CH3415	4	09JUL05	13JUL05	3	[Gantt bar from 09JUL05 to 13JUL05]															
01-12436	Proposed CLP on E/B C.way CH2950-3130	9	16JUL05	27JUL05	-2	[Gantt bar from 16JUL05 to 27JUL05]															

Activity ID	Activity Description	Orig Dur	Early Start	Early Finish	Total Float	2005													
						MAY	JUN					JUL		AUG					
						15	22	29	6	13	20	27	4	11	18	25	1	8	15
<b>Proposed Utility Works</b>																			
01-125522	CATV Cross Rd. Ducts at W/B CH3525	4	16JUL05	21JUL05	-14														
01-125544	HKT Cross Rd. Ducts at W/B CH3470	4	20JUL05	23JUL05	-14														
01-125561	CLP Cross Rd. Ducts at W/B CH3415	4	22JUL05	26JUL05	-14														
01-125563	CLP Cross Rd. Ducts at W/B CH3480	4	25JUL05	28JUL05	-14														
<b>3. Roadworks</b>																			
<b>Earthworks</b>																			
03-3242	Earthworks at W/B C'way CH3400-3530	238*	09AUG04A	28MAY05	-38														
<b>Drainage Works</b>																			
03-33202	Drainage Works on W/B C'way bet CH3300-3400	20	12MAR05A	20MAY05	-27														
03-3323	Drainage Works on E/B C'way bet CH2960-3130	50	11APR05A	23JUN05	-21														
03-33231	Drainage Works on E/B C'way bet CH3130-3250	50	30MAY05	29JUL05	-20														
03-3321	Drainage Works on W/B C'way bet CH3400-3530	26	22JUN05	23JUL05	-23														
03-33232	Drainage Works on E/B C'way bet CH3250-3460	50	15JUL05	12SEP05	-38														
<b>Pipe Works (Local Supply Watermains)</b>																			
03-3330	Pipe Works on E/B C'way bet CH3010-3130	30	31MAY05	06JUL05	-21														
03-33301	Pipe Works on E/B C'way bet CH3130-3250	30	07JUL05	11AUG05	-21														
03-3332	Pipe Works on W/B C'way bet CH3440-3530	13	25JUL05	08AUG05	-23														
03-33302	Pipe Works on E/B C'way bet CH3250-3460	30	04AUG05	07SEP05	-38														
<b>Road Works</b>																			
03-3340	Dragon Garden Accommodation	944*	12APR02A	21JUN05	-40														
03-334008	Remove Temporary Hoarding & Reinstatement	35	28APR04A	21JUN05	59														
03-33145	Lay sub-base, kerbs & edgings: W/B CH3300-3400	7	06MAY05A	04JUN05	-38														
03-33146	Construct rd pave & f/p: W/B CH3300-3400	6	04JUN05	10JUN05	-38														
03-33161	Dvert Traffic on W/B Perma C'way CH3300-3400	0		10JUN05	-38														
03-3317	Formation/sub-base, kerbs: E/B CH3010-3460	39	01AUG05	14SEP05	-38														
03-3315	Formation, sub-base, kerbs: W/B CH3400-3530	13	09AUG05	23AUG05	-23														
<b>R.E. Wall REV05</b>																			
<b>Reinforced Earth Wall REV05</b>																			
REV014	L-shaped wall & Plinth	40	03JAN05A	19MAY05	-27														
REV016	P1 Parapets	30	03JAN05A	19MAY05	-27														
<b>5. Footbridges</b>																			
<b>Footbridge FB11</b>																			
05-5550	Construct Ramp for FB11 (South)	60	01FEB05A	07MAY05A															
05-55606	Erect Steelwork & Roofing for FB11 (North)	30	28FEB05A	06JUN05	41														
05-55504	Construct Stairway for FB11 (South)	30	29MAR05A	07MAY05A															
05-5540	Const/Erect Deck of Main Span for FB11	40	09MAY05A	25JUN05	19														
05-55506	Erect Steelwork & Roofing for FB11 (South)	30	17MAY05	21JUN05	29														
05-55402	Erect Steelwork & Roofing of Main Span for FB11	30	27JUN05	02AUG05	19														
05-5570	E&M Works for Footbridge FB11	30	05JUL05	09AUG05	19														
<b>6. Retaining Walls</b>																			
<b>Reinforced Earth Wall 14</b>																			
RE1412	Mass conc./Install panel & mesh/Backfill/coping	60	21MAR05A	08JUN05	-20														



Activity ID	Activity Description	Orig Dur	Early Start	Early Finish	Total Float	2005														
						MAY	JUN				JUL				AUG					
						15	23	30	6	13	20	27	4	11	18	25	1	8	15	
<b>Reinforced Earth Wall 14</b>																				
RE1414	Filling/Trip slope/Drainage & Maint. stair	40	09JUN05	28JUL05	-20															
<b>L-Shaped Walls</b>																				
06-6580	Construct Retaining Wall RW15	244*	09AUG04A	04JUN05	-38															
06-6580B	Base/wall for RW15: bays 4-6	40	21FEB05A	21MAY05	-38															
06-65808	Piloth for RW15: bays 4-6	16	11APR05A	04JUN05	29															
06-65807	Backfill for RW15: bays 4-6	10	18APR05A	28MAY05	-38															
<b>8. Culverts and Outfalls</b>																				
<b>Culvert - Outfall HB</b>																				
08-81020	Temp. Works & Exc. Culvert-Outfall HB (Middle)	21	10JAN05A	17MAY05	-20															
08-810202	Const. Culvert-Outfall HB (Middle)	30	18MAY05	22JUN05	-20															
08-810203	Const. Culvert-Outfall HB (North)	30	23JUN05	29JUL05	-20															
<b>Culvert-Outfall H</b>																				
08-81130	Exc. Culvert-Outfall H (Remaining Portion)	12	17MAY05	30MAY05	-23															
08-811302	Const. SMHH2: Outfall H	10	31MAY05	10JUN05	-23															
08-811303	Const. 1.65m pipe with conc. surround: Outfall H	10	13JUN05	23JUN05	-23															
08-811304	Const. 1.65m cascade: Outfall H	10	24JUN05	06JUL05	-23															
<b>10. Geotechnical &amp; Slope Works</b>																				
<b>Existing Slope Works</b>																				
10-1092	Remedial Works at Slope No. FR41	540*	26JUL03A	23MAY05	-13															
10-10928	Fill behind RW104 & Finishing Work	16	07JAN04A	23MAY05	-13															
<b>11. Entrusted Sewerage Works</b>																				
<b>Entrusted Sewers/Drains</b>																				
11-114001	350mm Twin Rising Mains at CH 3000-3130	40	01APR05A	15JUN05	-21															
11-114002	350mm Twin Rising Mains at CH 3130-3250	40	18APR05A	07JUL05	-18															
11-1140	Sewer at E/B CH3000-3130	40	17MAY05	04JUL05	-21															
11-11401	Sewer at E/B bet CH3130-3250	40	10JUN05	29JUL05	-20															
11-114003	350mm Twin Rising Mains at CH 3250-3460	40	27JUN05	13AUG05	-38															
11-11402	Sewer at E/B bet CH3250-3460	40	28JUL05	12SEP05	-38															
<b>12. Entrusted Watermains</b>																				
<b>Entrusted Water Mains</b>																				
12-1230	DN1000FW/Associated Wks E/B CH2970-3100	50	03MAR05A	25MAY05	-21															
12-12301	DN1000FW/Associated Wks E/B CH3130-3250	50	01APR05A	30JUN05	-18															
12-1221	DN1000FW/Associated Wks(W/B C'way CH3400-3470	26	04JUN05	06JUL05	-23															
12-12302	DN1000FW/Associated Wks E/B CH3250-3400	50	13JUN05	11AUG05	-38															
<b>13. Reprovisioning of LCSD &amp; FEHD Facilities</b>																				
<b>Stairways</b>																				
13-1332	Construct Stairway ST07	170*	25OCT04A	23MAY05	-13															
13-13328	Finishing & railing: ST07	12	17JAN05A	23MAY05	-13															
<b>14. Landscape Works</b>																				
<b>Landscape Softworks</b>																				
14-14101	Landscape Works bet CH3010-3730	150	17JUN05	14DEC05	-38															

Activity ID	Activity Description	Orig Dur	Early Start	Early Finish	Total Float
-------------	----------------------	----------	-------------	--------------	-------------

**18. Variation Works**

**New Slope No. 9**

10-10536	Drainage at Crest & West End of Slope (VO 412)	12	16MARP05A	25MAY05	69
----------	--	----	-----------	---------	----

**New Slope No. 11**

10-10757	Reprovision of B. Fence: V.O. No. 133	45	07FEB04A	30MAY05	77
----------	---------------------------------------	----	----------	---------	----

**Vehicular Parapets:**


VO-24960	Additional Vehicular Parapets at CH 3400-3425	18	17MAY05	06JUN05	28
----------	---	----	---------	---------	----

**CPR from Chainage 3+730 to Chainage 4+470**

**1. Preliminaries**

**Proposed Utility Works**

01-12471	Additional Gasmain on E/B C.way CH4330-4470	21	07DEC04A	19MAY05	-34
01-12444	Proposed CLP on W/B C.way CH3630-3650	11	18APR05A	06MAY05A	
01-12443	Proposed HKT on W/B C.way CH3630-3650	11	06MAY05A	19MAY05	-1
01-124735	Proposed HT on E/B C.way CH4330-4470	7	17MAY05	24MAY05	82
01-124842	HKT Cross Rd. Ducts at E/B Slow Lane CH4363	4	18MAY05	21MAY05	-34
01-1247352	HT Cross Rd. Ducts at E/B Slow Lane CH4361	4	20MAY05	24MAY05	-34
01-1247381	CATV Cross Rd. Ducts at Slow Lane E/B CH4374	4	23MAY05	26MAY05	-34
01-12442	Proposed Gasmain on W/B C.way CH3670-3730	6	27MAY05	02JUN05	-31
01-124554	HKT Cross Rd. Ducts at W/B CH3670	4	31MAY05	03JUN05	-28
01-124631	CLP Cross Rd. Ducts at W/B CH3970	4	09JUN05	14JUN05	-33
01-124633	CLP Cross Rd. Ducts at W/B CH4100	4	15JUN05	18JUN05	-33
01-1257	Proposed Gasmain on E/B C.way CH3650-3900	12	18JUN05	02JUL05	-40
01-124621	HKT Cross Rd. Ducts at W/B CH4133	4	20JUN05	23JUN05	-33
01-12472	Proposed NWT on E/B C.way CH3900	6	21JUN05	27JUN05	-40
01-12481	Proposed CATV on E/B C.way CH3650-3900	6	23JUN05	29JUN05	-40
01-124964	HKT Cross Rd. Ducts at W/B CH3970	4	24JUN05	28JUN05	-33
01-124812	Proposed HKBN on E/B C.way CH3650-3900	6	25JUN05	02JUL05	-40
01-12494	Proposed HKT on E/B C.way CH3650-3900	6	28JUN05	05JUL05	-40
01-12482	Proposed HT on E/B C.way CH3850-3900	6	30JUN05	07JUL05	-40
01-12495	Proposed CLP on E/B C.way CH3850-3900	6	04JUL05	09JUL05	-40
01-124844	HKT Cross Rd. Ducts at W/B CH4363	4	07JUL05	11JUL05	-22
01-12463	Proposed CLP on W/B C.way CH3910-4330	19	08JUL05	30JUL05	-26
01-1247334	CATV Cross Rd. Ducts at W/B CH4375	4	12JUL05	15JUL05	-22
01-12462	Proposed HKT on W/B C. say CH3910-4330	19	15JUL05	06AUG05	-26
01-1247354	HT Cross Rd. Ducts at W/B CH4361	4	16JUL05	21JUL05	-22
01-124622	Proposed HKBN on W/B C.way CH3910-4330	19	20JUL05	10AUG05	-26
01-124635	CLP Cross Rd. Ducts at W/B CH4180	4	20JUL05	23JUL05	-20
01-1247382	CLP Cross Rd. Ducts at W/B CH4430	4	22JUL05	26JUL05	-22
01-1247385	CLP Cross Rd. Ducts at W/B CH4470	7	27JUL05	03AUG05	-22
01-124762	Proposed CLP on E/B C.way CH4180-4330	8	03AUG05	11AUG05	-23
01-1247343	NWT Cross Rd. ducts at W/B CH4450	4	04AUG05	08AUG05	-22
01-12464	Proposed CATV on W/B C.way CH4340-4470	7	10AUG05	17AUG05	-23
01-124732	Proposed CATV on E/B C.way CH3980-4330	18	12AUG05	01SEP05	-23

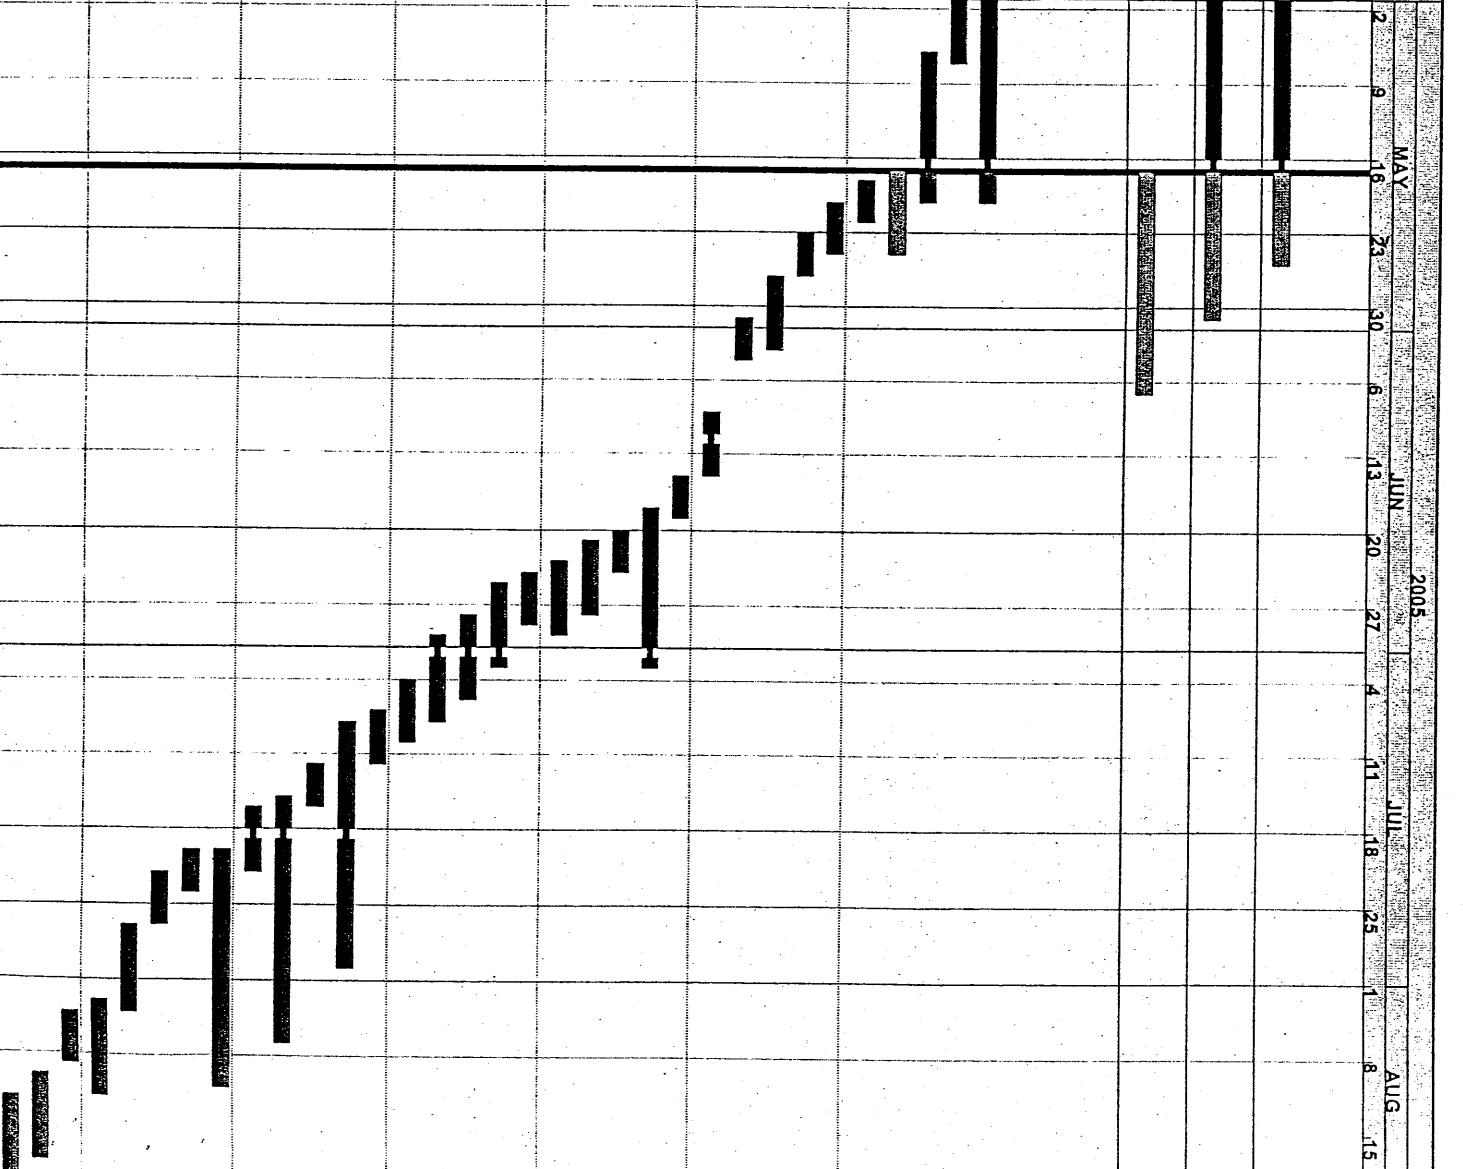

Activity ID	Activity Description	Orig Dur	Early Start	Early Finish	Total Float	2005															
						2	9	16	23	30	6	13	20	27	4	11	18	25	1	8	15
						MAY JUN 2005 JUL AUG															

### 3. Roadworks

#### Utility Diversion

03-34506	Expose/protect UUs at E/B CH 3850-3900	30	01FEB05A	24MAY05	-40																		
03-34505	Expose/protect UUs at E/B CH 3630-3850	30	02JUN05	08JUL05	-34																		

#### Earthworks

03-3401	Road formation at W/B Cway CH3730-3850	12	18APR05A	04MAY05A																			
03-34012	Road formation at W/B Cway CH3630-3730	10	02JUN05	14JUN05	-34																		
03-3402	Road formation at W/B CH3950-4200	20	09JUN05	04JUL05	-35																		
03-34022	Road formation at W/B CH4200-4330	20	14JUL05	06AUG05	-26																		

#### Drainage Works

03-3465	Construct drainage/backfill at E/B CH4300-4470	148	25AUG04A	20MAY05	-34																		
03-34201	Drainage Works at W/B Cway CH3610-3730	30	24JAN05A	02JUN05	-31																		
03-3421	Drainage Works at W/B Cway CH3950-4200	50	30MAR05A	25JUN05	-35																		
03-34212	Drainage Works at W/B Cway CH4200-4330	50	09MAY05A	08JUL05	-26																		
03-3423	Drainage Works at E/B Cway CH3850-3900	30	31MAY05	06JUL05	-40																		
03-3425	Drainage Works at W/B Cway CH4330-4470	48*	02JUN05	30JUL05	-34																		
03-34252	Trials pits/Sheet piling/excavate for drainage	40	02JUN05	21JUL05	-34																		
03-34254	Construct drainage/backfill at W/B CH4330-4470	40	13JUN05	30JUL05	-34																		
03-3422	Drainage Works at E/B Cway CH3670-3850	45	05JUL05	26AUG05	-34																		
03-34204	Drainage Works at W/B Cway CH3900-3950	10	19JUL05	29JUL05	-40																		
03-3444	Drainage Works at E/B Cway CH4050-4180	40	20JUL05	03SEP05	-35																		

#### Pipe Works (Local Supply Watermains)

03-3434	Pipe Works at W/B Cway bel CH3950-4200	30	17MAR05A	18JUN05	-35																		
03-34310	Pipe Works at W/B Cway bel CH3600-3700	20	18APR05A	06JUN05	-34																		
03-3440	Pipe Works at E/B Cway bel CH3850-3900	36	18APR05A	15JUN05	-33																		
03-34341	Pipe Testing & Connection at CH3950-4200	18	20JUN05	11JUL05	-29																		
03-34342	Pipe Works at W/B Cway bel CH4200-4330	30	24JUN05	30JUL05	-26																		
03-3441	Pipe Works at W/B Cway bel CH4330-4370	30	05JUL05	09AUG05	-34																		
03-34314	Pipe Works at W/B CH3910-3950	10	30JUL05	10AUG05	-40																		
03-3430	Pipe Works at E/B Cway bel CH3670-3850	30	04AUG05	07SEP05	-34																		
03-34315	Testing/Connection of Pipe Works	18	11AUG05	31AUG05	-40																		

#### Road Works

03-34534	Stage 3 TTA (works at E/B slow lane)	254*	23JUL04A	01JUN05	-34																		
03-34561	Lay sub-base, kerbs & edgings: E/B CH4330-4470	12	15DEC04A	26MAY05	-34																		
03-34566	Construct rd pave: R10	8	20DEC04A	20MAY05	-2																		
03-3450	Lay sub-base: W/B CH3730-3850	4	05MAY05A	17MAY05	-27																		
03-34502	Construct rd pave & f/tp: W/B CH3730-3850	8	17MAY05	25MAY05	-28																		
03-345423	Construct rd pave & f/tp: E/B CH4330-4470	8	24MAY05	01JUN05	-34																		
03-3452	Diverter Traffic to W/B Perma Cway CH3730-3850	0		25MAY05	-28																		
03-3412	Diverter Traffic to E/B Cway CH4330-4470	0		01JUN05	-34																		
03-34535	Stage 4 TTA (works at W/B carriage way)	68*	02JUN05	23AUG05	-34																		
03-34501	Lay sub-base, kerbs & edgings: W/B CH3630-3730	8	09JUN05	18JUN05	-34																		
03-3451	Lay sub-base, kerbs & edgings: W/B CH3950-44150	20	17JUN05	11JUL05	-35																		
03-34503	Construct rd pave & f/tp: W/B CH3630-3730	8	20JUN05	28JUN05	-34																		
03-34512	Construct rd pave & f/tp: W/B CH3950-4150	20	24JUN05	19JUL05	-35																		

Activity ID	Activity Description	Orig Dur	Early Start	Early Finish	Total Float	2005																					
						MAY	JUN				JUL				AUG												
						15	22	29	5	12	19	26	2	9	16	23	30	6	13	20	27	3	10	17	24	31	
<b>Road Works</b>																											
03-34520	Divert Traffic to WB Perma C'way CH3630-3730	0		28JUN05	-34																						
03-3464	Rd. formation/sub-base kerbs: E/B CH3850-3900	10	28JUN05	09JUL05	-40																						
03-34558	Rd finishes, marking & lighting: R10	4	02JUL05	06JUL05	47																						
03-34642	Construct rd pave & fip: E/B CH3850-3900	10	06JUL05	16JUL05	-40																						
03-34672	Divert Traffic to E/B C'way CH3850-3950	0		16JUL05	-40																						
03-34522	Divert Traffic to WB Perma C'way CH3950-4150	0		19JUL05	-35																						
03-345122	Lay sub-base, kerbs & edgings: WB CH4200-4330	20	22JUL05	13AUG05	-26																						
03-34511	Lay sub-base, kerbs & edgings: WB CH4330-4470	12	03AUG05	16AUG05	-34																						
03-345124	Construct rd pave & fip: WB CH4200-4330	20	03AUG05	25AUG05	-26																						
03-34513	Construct rd pave & fip: WB CH4330-4470	12	10AUG05	23AUG05	-34																						
<b>5. Footbridges</b>																											
<b>Footbridge FB03</b>																											
05-54806	Erect Steelwork & Roofing for FB03 (North)	30	08NOV04A	25MAY05	-10																						
05-54508	Erect Steelwork & Roofing for FB03 (South)	30	08JAN05A	23MAY05	27																						
05-54122	Piling and Pile Testing (2 Nos.) FB03 (Middle)	30	04APR05A	19MAY05	-38																						
05-54123	Middle Pile cap for FB01: 1 Nos.	12	20MAY05	02JUN05	-34																						
05-54124	Middle Column & Column head for FB01	24	03JUN05	02JUL05	-34																						
05-5440	Const./Erect 2 Nos. Main Deck Beams for FB03	70	03JUN05	28AUG05	-30																						
05-54402	Erect Steelwork & Roofing of Main Span for FB03	50	28JUL05	25SEP05	-26																						
<b>8. Culverts and Outfalls</b>																											
<b>Culvert-Outfall IB</b>																											
08-81510	Exc. Culvert-Outfall IB (within E/B of CPR)	6	29JUN05	06JUL05	-34																						
08-815102	Const. Culvert-Outfall IB (within E/B of CPR)	24	07JUL05	04AUG05	-34																						
<b>Culvert-Outfall I</b>																											
08-81330	Excavate Culvert bays 5-7: Outfall I	24	07MAR05A	02JUN05	-40																						
08-813302	Const. Culvert bays 5-7: Outfall I	30	03MAY05A	27JUN05	-40																						
<b>9. Seawalls and Marine Works</b>																											
<b>Seawall C (460 m Length)</b>																											
09-9264	Granular Fill behind RW-C: Bays 25-33	24	28FEB05A	08JUN05	-26																						
09-9262	Granular Fill behind RW-C: Bays 3-6/17-24	12	21MAY05	03JUN05	-33																						
<b>L-Shaped Walls</b>																											
09-9250	Construct Retaining Wall RW-C	428*	29JAN04A	09JUL05	-36																						
09-92509	Construct Retaining Wall RW-C: bay 25-33	50	08JAN05A	06MAY05A																							
09-925073	Protect slope/excavate for RW-C: Bays 5-6/17-21	40	10JAN05A	05MAY05A																							
09-925092	Construct Retaining Wall RW-C: bay 4-6/17-21	48	04MAR05A	30MAY05	-33																						
09-925062	Construct Retaining Wall RW-C: bays 1-2	20	16JUN05	09JUL05	-36																						
<b>11. Entrusted Sewerage Works</b>																											
<b>Entrusted Sewers/Drains</b>																											
11-1123	Sewer Works at E/B C'way bet CH3650-3900	30	25MAY05	29JUN05	-40																						
11-1122	Sewer Works at E/B C'way bet CH3670-3850	45	17JUN05	10AUG05	-34																						
11-1127	Sewer Works at E/B CH4050-4180	40	01AUG05	15SEP05	-35																						

Activity ID	Activity Description	Orig Dur	Early Start	Early Finish	Total Float	2005															
						MAY	JUN					JUL				AUG					
						2	9	16	23	30	6	13	20	27	4	11	18	25	1	8	15
<b>12. Entrusted Watermains</b>																					
<b>Entrusted Water Mains</b>																					
12-1225	DN1000FW/Associated Wks E/B bet CH4320-4470	231*	23JUL04A	04MAY05A																	
12-12254	DN1000FW/Associated E/B Wks bet CH 4320-4470	152	13AUG04A	04MAY05A																	
12-12221	DN1000FW/Associated Wks W/B bet CH3610-3730	30	22FEB05A	27MAY05	-28																
12-1223	DN1000FW/Associated Wks W/B bet CH3950-4200	48	23FEB05A	14JUN05	-35																
12-12232	DN1000FW/Associated Wks W/B bet CH4200-4310	50	24MAY05	23JUL05	-26																
12-12223	DN1000FW/Associated Wks W/B bet CH3910-3950	12	11JUL05	25JUL05	-36																
<b>13. Reprovisioning of LCSD &amp; FEHD Facilities</b>																					
<b>FEHD Facilities</b>																					
13-1350	Reprovision Pavillion & Pal Lau	478*	22DEC03A	06AUG05	-10																
13-13521	Finishing Works of Pal Lau	30	12APR05A	25MAY05	77																
13-1353	Substructure of Pavillion	18	26MAY05	16JUN05	-10																
13-1354	Superstructure of Pavillion	42	17JUN05	06AUG05	-10																
13-1332	Construct RCP F	30	12AUG05	15SEP05	-19																
<b>Stairways</b>																					
13-1334	Construct Stairway ST09	20	31MAY05	23JUN05	37																
13-1335	Construct Stairway ST09A	20	24JUN05	19JUL05	37																
<b>14. Landscape Works</b>																					
<b>Landscape Softworks</b>																					
14-14102	Landscape Works bet CH3730-4470	150	15JUN05	12DEC05	-36																
<b>18. Variation Works</b>																					
<b>Stairways</b>																					
13-1336	Const. New Pavillion/ret. wall/stair: VO 211	182*	15NOV04A	28JUN05	6																
13-1337	Const. cantilever walkway, RWC bay 29-33: VO 211	40	11APR05A	14MAY05A																	
13-13366	Const. New Pavillion/stair: VO 211	24	31MAY05	28JUN05	6																
<b>Additional Outfall Ml: VO 244</b>																					
08-8124	Excavation for SMM11/MICP1/675mm twin pipes	12	20JUL05	02AUG05	-30																
08-81825	Construct SMM12/MICP1/675mm twin pipes	18	03AUG05	23AUG05	-30																
<b>Additional Works at RW-C: Bays 2-4</b>																					
VO-39509	Temp. works/Excavation/Mass concrete, Bay 2	10	03JUN05	15JUN05	-36																
<b>Remedial Works to Existing Feature No. 6SE-C/C22</b>																					
VO-30904	Remove existing shortcree	12	28FEB05A	23MAY05	47																
VO-30906	Construct 12 nos. test nails	18	05MAR05A	26MAY05	47																
VO-30908	Construct 202 nos. soil nails	40	11MAR05A	08JUN05	47																
VO-30910	Construct drainage & maint. stairway	12	09JUN05	23JUN05	47																
VO-30912	Lay erosion mat and hydrosseeding	6	24JUN05	30JUN05	47																



APPENDIX C  

---

**Monitoring schedule for  
May 2005 and June  
2005**





### Environmental Monitoring and Audit Schedule - May 2005

- Note 1: **L30** denotes  $L_{eq(30\text{ min})}$  monitoring
- Note 2: **TSP** denotes Total Suspended Particulate monitoring
- Note 3: **MW** denotes Marine Water Quality monitoring
- Note 4: **L&V** denotes Landscape and Visual audit and monitoring

May-2005						
Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
1	2	3 L30 3 x 1-hour TSP x	4	5 24-hour TSP Site Inpsection + L&V	6 3 x 1-hour TSP	7
8 x	9	10	11 24-hour TSP	12 L30 3 x 1-hour TSP Site Inpsection	13	14 x
15	16	17 24-hour TSP	18 L30 3 x 1-hour TSP	19 Site Inpsection + L&V	20 x	21
22	23 24-hour TSP	24 L30 3 x 1-hour TSP	25	26 x	27	28 24-hour TSP
29	30 L30 3 x 1-hour TSP	31	1	2 Site Inpsection + L&V x	3 24-hour TSP	4

### Tentative Environmental Monitoring and Audit Schedule - June 2005

- Note 1: **L30** denotes  $L_{eq(30\text{ min})}$  monitoring
- Note 2: **TSP** denotes Total Suspended Particulate monitoring
- Note 3: **MW** denotes Marine Water Quality monitoring
- Note 4: **L&V** denotes Landscape and Visual audit and monitoring

Jun-2005						
Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
29	30 L30 3 x 1-hour TSP	31	1	2	3 24-hour TSP	4
5	6 L30 3 x 1-hour TSP	7	8	9 24-hour TSP Site Inpsection + L&V	10 3 x 1-hour TSP	11
12	13	14	15 24-hour TSP	16 L30 3 x 1-hour TSP Site Inpsection	17	18
19	20	21 24-hour TSP	22 L30 3 x 1-hour TSP	23 Site Inpsection + L&V	24	25
26	27 24-hour TSP	28 L30 3 x 1-hour TSP	29	30 Site Inpsection	1	2 24-hour TSP

APPENDIX D  

---

**Calibration certificates  
of 24-hour TSP  
monitoring equipment**




# Ove Arup Partners (Hong Kong) Limited

## High Volume Air Sampler Calibration Worksheet

Calibration date	1-Apr-05	Barometric pressure	759.8 mm Hg
Calibration due date	31-May-05	Temperature (°C)	18 °C
Sampler location	WA3 - Hong Kong Garden (Regent Heights)	Temperature (K)	291 K
Sampler model	TE-5170	P <sub>std</sub>	760 mm Hg
Sampler serial number	0505	T <sub>std</sub>	298 K
Calibrator model		GMW-2535	
Calibrator serial number		1201	
Slope of the standard curve, m <sub>s</sub>		1.93285	
Intercept of the standard curve, b <sub>s</sub>		0.00398	

Resistance Plate No.	Manometer Reading (inch H <sub>2</sub> O)	Flow Recorder Reading (CFM)	Calculated Q <sub>std</sub> (m <sup>3</sup> /min)	Continuous Flow Recorder Reading IC (CFM)
5	3.20	33.00	0.93	33.39
7	4.50	40.00	1.11	40.47
10	7.20	50.00	1.40	50.59
13	9.90	59.00	1.65	59.70
18	12.50	63.00	1.85	63.74


**Calibration Curve**

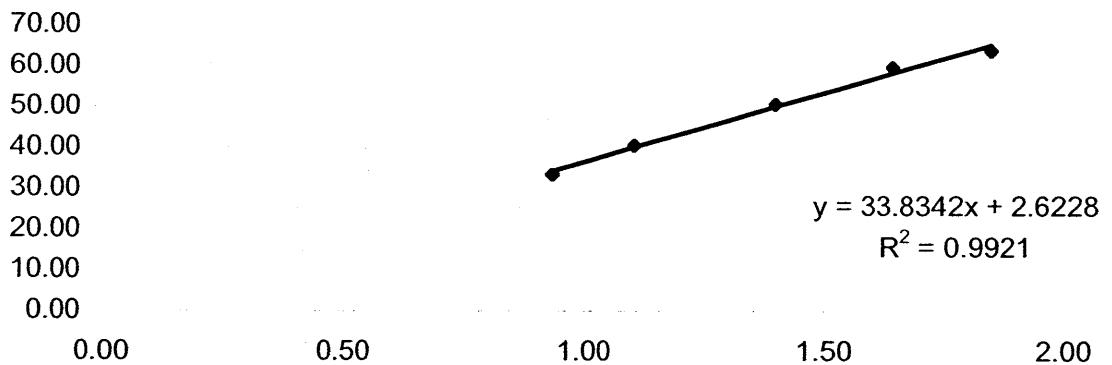


**Linear Regression**

Sampler slope (m) : **33.8342**  
 Sampler intercept (b) : **2.6228**  
 Correlation coefficient (R<sup>2</sup>) : **0.9921**

**Correlation coefficient is greater than 0.9900 and the calibration result is accepted.**

Performed by: 

Date: 1.4-05

Checked by: 

Date: 4.4.05


# Ove Arup Partners (Hong Kong) Limited

## High Volume Air Sampler Calibration Worksheet

Calibration date	21-Apr-05	Barometric pressure	761 mm Hg
Calibration due date	20-Jun-05	Temperature (°C)	27 °C
Sampler location	WA4 - Hong Kong Garden (Between Blk1 & Blk2)	Temperature (K)	300 K
Sampler model	TE-5170	P <sub>std</sub>	760 mm Hg
Sampler serial number	0512	T <sub>std</sub>	298 K
Calibrator model	GMW-2535		
Calibrator serial number	1201		
Slope of the standard curve, m <sub>s</sub>	1.93285		
Intercept of the standard curve, b <sub>s</sub>	0.00398		

Resistance Plate No.	Manometer Reading (inch H <sub>2</sub> O)	Flow Recorder Reading (CFM)	Calculated Q <sub>std</sub> (m <sup>3</sup> /min)	Continuous Flow Recorder Reading IC (CFM)
5	2.70	37.00	0.85	36.90
7	5.10	49.00	1.16	48.87
10	8.20	56.00	1.48	55.85
13	10.40	62.00	1.66	61.83
18	12.60	67.00	1.83	66.82

Calibration Curve

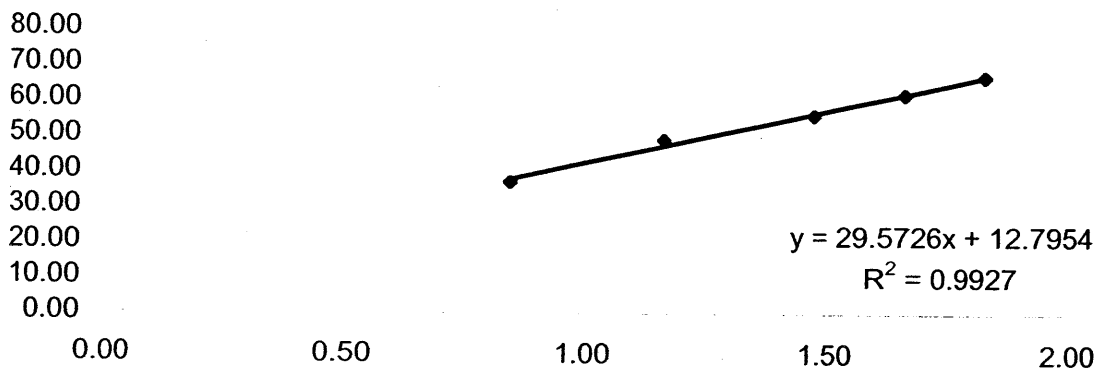

### Linear Regression

Sampler slope (m) : 29.5726  
 Sampler intercept (b) : 12.7954  
 Correlation coefficient (R<sup>2</sup>) : 0.9927

Correlation coefficient is greater than 0.9900 and the calibration result is accepted.

Performed by: Je -

Date: 21-4-05

Checked by: Chy.

Date: 22-4-05

# Ove Arup Partners (Hong Kong) Limited


## High Volume Air Sampler Calibration Worksheet

Calibration date	21-Apr-05	Barometric pressure	761 mm Hg
Calibration due date	20-Jun-05	Temperature (°C)	27 °C
Sampler location	WA5 - Hong Kong Garden (Blk4)	Temperature (K)	300 K
Sampler model	TE-5170	P <sub>std</sub>	760 mm Hg
Sampler serial number	0511	T <sub>std</sub>	298 K

Calibrator model	GMW-2535
Calibrator serial number	1201
Slope of the standard curve, m <sub>s</sub>	1.93285
Intercept of the standard curve, b <sub>s</sub>	0.00398

Resistance Plate No.	Manometer Reading (inch H <sub>2</sub> O)	Flow Recorder Reading (CFM)	Calculated Q <sub>std</sub> (m <sup>3</sup> /min)	Continuous Flow Recorder Reading IC (CFM)
5	3.10	32.00	0.91	31.91
7	5.10	40.00	1.16	39.89
10	7.60	50.00	1.42	49.87
13	9.90	55.00	1.62	54.85
18	12.50	62.00	1.82	61.83

**Calibration Curve**

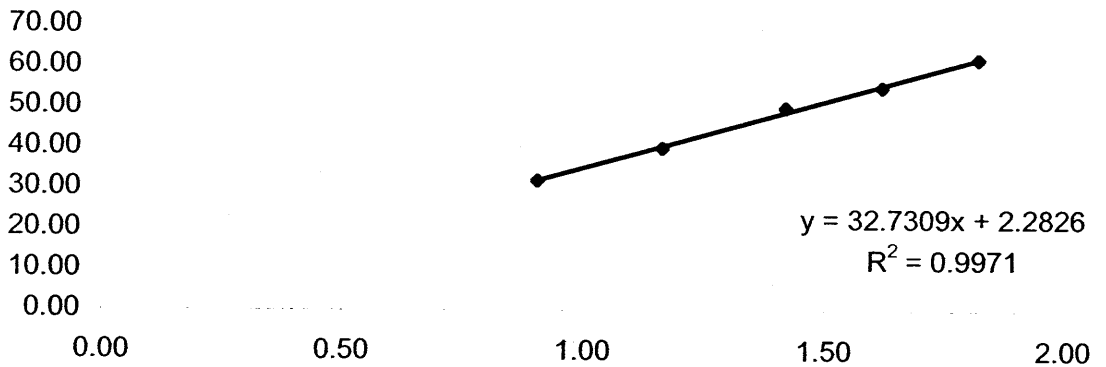

**Linear Regression**

Sampler slope (m) : **32.7309**  
 Sampler intercept (b) : **2.2826**  
 Correlation coefficient (R<sup>2</sup>) : **0.9971**

**Correlation coefficient is greater than 0.9900 and the calibration result is accepted.**

Performed by:                     *Jr.*                    

Date:                     21-4-05                    

Checked by:                     *Chris*                    

Date:                     22-4-05


# Ove Arup Partners (Hong Kong) Limited

## High Volume Air Sampler Calibration Worksheet

Calibration date	1-Apr-05	Barometric pressure	759.8 mm Hg
Calibration due date	31-May-05	Temperature (°C)	18 °C
Sampler location	WA6 - Tsing Lung Tau Temple	Temperature (K)	291 K
Sampler model	TE-5170	P <sub>std</sub>	760 mm Hg
Sampler serial number	0529	T <sub>std</sub>	298 K
Calibrator model	GMW-2535		
Calibrator serial number	1201		
Slope of the standard curve, m <sub>s</sub>	1.93285		
Intercept of the standard curve, b <sub>s</sub>	0.00398		

Resistance Plate No.	Manometer Reading (inch H <sub>2</sub> O)	Flow Recorder Reading (CFM)	Calculated Q <sub>std</sub> (m <sup>3</sup> /min)	Continuous Flow Recorder Reading IC (CFM)
5	2.90	25.00	0.89	25.30
7	4.40	35.00	1.10	35.41
10	6.60	44.00	1.34	44.52
13	8.80	53.00	1.55	53.63
18	12.00	60.00	1.81	60.71

**Calibration Curve**

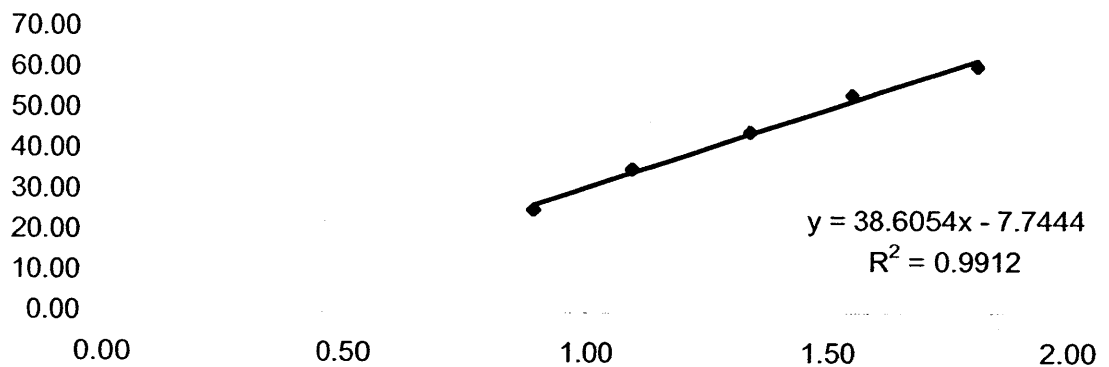

**Linear Regression**

Sampler slope (m) : **38.6054**  
 Sampler intercept (b) : **-7.7444**  
 Correlation coefficient (R<sup>2</sup>) : **0.9912**

**Correlation coefficient is greater than 0.9900 and the calibration result is accepted.**

Performed by: \_\_\_\_\_ *[Signature]*

Date: 1.4.05

Checked by: \_\_\_\_\_ *[Signature]*

Date: 4.4.05






# Ove Arup Partners (Hong Kong) Limited

## High Volume Air Sampler Calibration Worksheet

Calibration date	1-Apr-05	Barometric pressure	759.8 mm Hg
Calibration due date	31-May-05	Temperature (°C)	18 °C
Sampler location	WA8 - Sea Crest Villa (Phase 3 Block 8)	Temperature (K)	291 K
Sampler model	TE-5170	P <sub>std</sub>	760 mm Hg
Sampler serial number	0526	T <sub>std</sub>	298 K
Calibrator model		GMW-2535	
Calibrator serial number		1201	
Slope of the standard curve, m <sub>s</sub>		1.93285	
Intercept of the standard curve, b <sub>s</sub>		0.00398	

Resistance Plate No.	Manometer Reading (inch H <sub>2</sub> O)	Flow Recorder Reading (CFM)	Calculated Q <sub>std</sub> (m <sup>3</sup> /min)	Continuous Flow Recorder Reading IC (CFM)
5	3.30	28.00	0.95	28.33
7	4.70	35.00	1.13	35.41
10	7.80	45.00	1.46	45.53
13	10.60	55.00	1.70	55.65
18	12.60	59.00	1.86	59.70

**Calibration Curve**

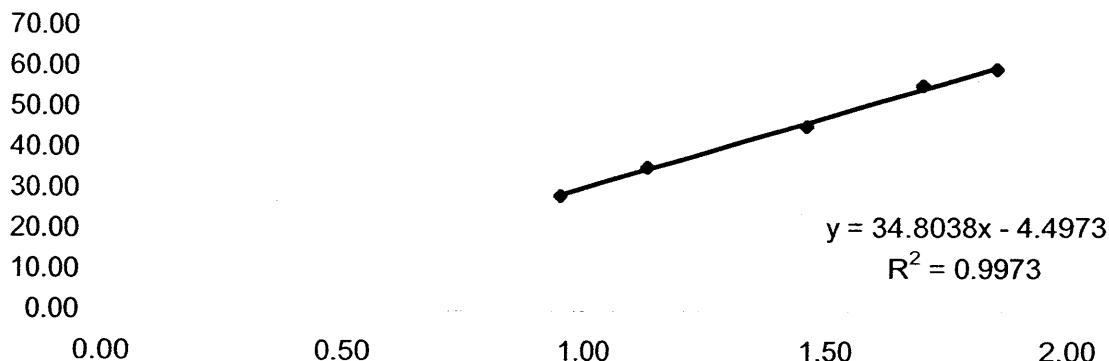

**Linear Regression**

Sampler slope (m) : **34.8038**  
 Sampler intercept (b) : **-4.4973**  
 Correlation coefficient (R<sup>2</sup>) : **0.9973**

**Correlation coefficient is greater than 0.9900 and the calibration result is accepted.**

Performed by: \_\_\_\_\_  
 Checked by: \_\_\_\_\_

Date: 1-4-05  
 Date: 4-4-05


# Ove Arup Partners (Hong Kong) Limited

## High Volume Air Sampler Calibration Worksheet

Calibration date	21-Apr-05	Barometric pressure	761 mm Hg
Calibration due date	20-Jun-05	Tempature (°C)	27 °C
Sampler location	WA9 - Sea Crest Villa (Phase 2 Blk 6)	Temperature (K)	300 K
Sampler model	TE-5170	P <sub>std</sub>	760 mm Hg
Sampler serial number	0523	T <sub>std</sub>	298 K
Calibrator model		GMW-2535	
Calibrator serial number		1201	
Slope of the standard curve, m <sub>s</sub>		1.93285	
Intercept of the standard curve, b <sub>s</sub>		0.00398	

Resistance Plate No.	Manometer Reading (inch H <sub>2</sub> O)	Flow Recorder Reading (CFM)	Calculated Q <sub>std</sub> (m <sup>3</sup> /min)	Continuous Flow Recorder Reading IC (CFM)
5	3.00	36.00	0.89	35.90
7	3.70	36.00	0.99	35.90
10	7.00	48.00	1.36	47.87
13	10.10	55.00	1.64	54.85
18	11.90	59.00	1.78	58.84

**Calibration Curve**

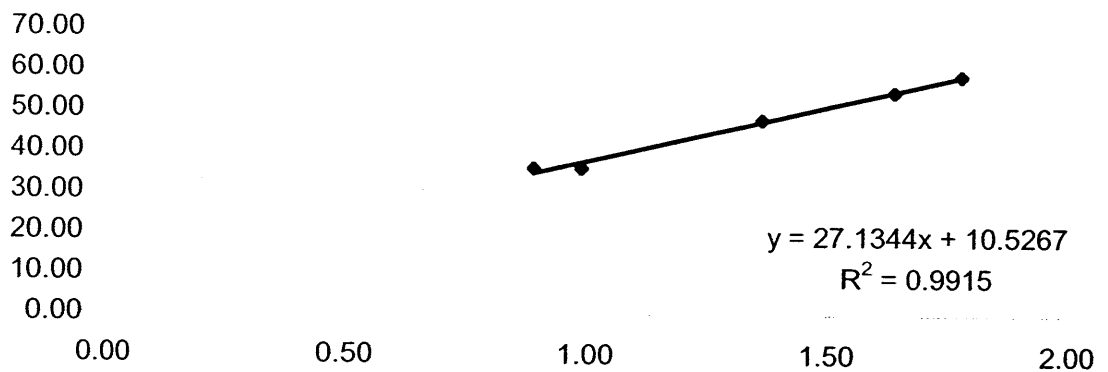

**Linear Regression**

Sampler slope (m) :           **27.1344**  
 Sampler intercept (b) :       **10.5267**  
 Correlation coefficient (R<sup>2</sup>) : **0.9915**

**Correlation coefficient is greater than 0.9900 and the calibration result is accepted.**

Performed by:                     *Jr.*                    

Date:                     21-4-05                    

Checked by:                     *Chy.*                    

Date:                     22-4-05


# Ove Arup Partners (Hong Kong) Limited

## High Volume Air Sampler Calibration Worksheet

Calibration date	1-Apr-05	Barometric pressure	759.8 mm Hg
Calibration due date	31-May-05	Temperature (°C)	18 °C
Sampler location	WA10 - Sea Crest Villa (Phase 1 Blk 1)	Temperature (K)	291 K
Sampler model	TE-5170	P <sub>std</sub>	760 mm Hg
Sampler serial number	0507	T <sub>std</sub>	298 K
Calibrator model	GMW-2535		
Calibrator serial number	1201		
Slope of the standard curve, m <sub>s</sub>	1.93285		
Intercept of the standard curve, b <sub>s</sub>	0.00398		

Resistance Plate No.	Manometer Reading (inch H <sub>2</sub> O)	Flow Recorder Reading (CFM)	Calculated Q <sub>std</sub> (m <sup>3</sup> /min)	Continuous Flow Recorder Reading IC (CFM)
5	3.00	33.00	0.90	33.39
7	3.60	35.00	0.99	35.41
10	6.30	44.00	1.31	44.52
13	9.80	56.00	1.64	56.66
18	11.50	58.00	1.77	58.69

**Calibration Curve**

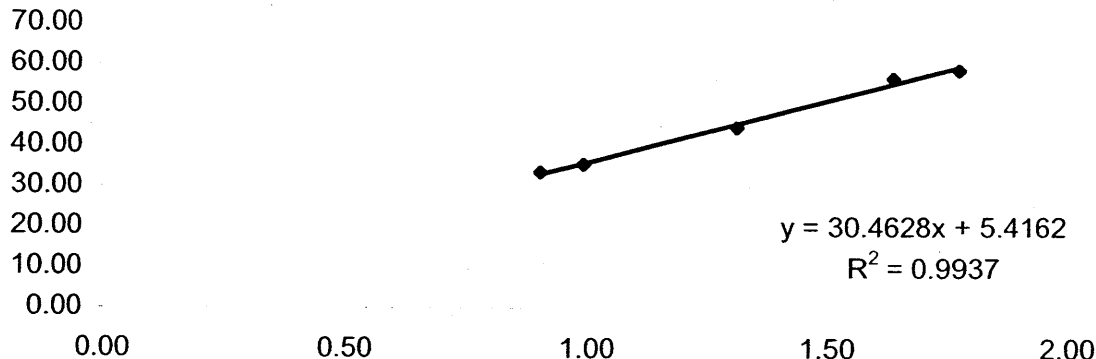

**Linear Regression**

Sampler slope (m) : **30.4628**  
 Sampler intercept (b) : **5.4162**  
 Correlation coefficient (R<sup>2</sup>) : **0.9937**

**Correlation coefficient is greater than 0.9900 and the calibration result is accepted.**

Performed by: \_\_\_\_\_ *[Signature]*

Date: 1-4-05

Checked by: \_\_\_\_\_ *[Signature]*

Date: 4-4-05

# Ove Arup Partners (Hong Kong) Limited


## High Volume Air Sampler Calibration Worksheet

Calibration date	1-Apr-05	Barometric pressure	759.8 mm Hg
Calibration due date	31-May-05	Temperature (°C)	18 °C
Sampler location	WA11 - Lido Garden Tower 1	Temperature (K)	291 K
Sampler model	TE-5170	P <sub>std</sub>	760 mm Hg
Sampler serial number	0521	T <sub>std</sub>	298 K

Calibrator model	GMW-2535
Calibrator serial number	1201
Slope of the standard curve, m <sub>s</sub>	1.93285
Intercept of the standard curve, b <sub>s</sub>	0.00398

Resistance Plate No.	Manometer Reading (inch H <sub>2</sub> O)	Flow Recorder Reading (CFM)	Calculated Q <sub>std</sub> (m <sup>3</sup> /min)	Continuous Flow Recorder Reading IC (CFM)
5	3.20	32.00	0.93	32.38
7	4.60	40.00	1.12	40.47
10	9.00	52.00	1.57	52.61
13	11.20	59.00	1.75	59.70
18	11.80	61.00	1.80	61.72

**Calibration Curve**

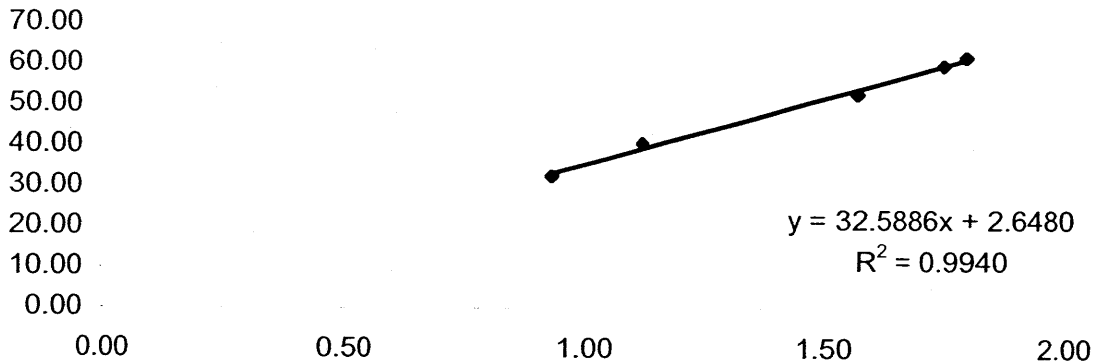

**Linear Regression**

Sampler slope (m) : **32.5886**  
 Sampler intercept (b) : **2.6480**  
 Correlation coefficient (R<sup>2</sup>) : **0.9940**

**Correlation coefficient is greater than 0.9900 and the calibration result is accepted.**

Performed by: \_\_\_\_\_  
 Checked by: \_\_\_\_\_

Date: 1-4-05  
 Date: 4-4-05



TISCH ENVIRONMENTAL, INC.  
 145 SOUTH MIAMI AVE.  
 VILLAGE OF CLEVELAND, OH 45002  
 513.467.9000  
 877.263.7610 TOLL FREE  
 513.467.9009 FAX  
 WWW.TISCH-ENV.COM

AIR POLLUTION MONITORING EQUIPMENT

ORIFICE TRANSFER STANDARD CERTIFICATION WORKSHEET TE-5025A

Date - Feb 10, 2005 Rootsometer S/N 9833620 Ta (K) - 292  
 Operator Tisch Orifice I.D. - 1378 Pa (mm) - 754.38

PLATE OR Run #	VOLUME START (m3)	VOLUME STOP (m3)	DIFF VOLUME (m3)	DIFF TIME (min)	METER DIFF Hg (mm)	ORFICE DIFF H2O (in.)
1	NA	NA	1.00	1.4010	3.2	2.00
2	NA	NA	1.00	0.9870	6.3	4.00
3	NA	NA	1.00	0.8840	7.8	5.00
4	NA	NA	1.00	0.8420	8.7	5.50
5	NA	NA	1.00	0.6960	12.5	8.00

DATA TABULATION

Vstd	(x axis) Qstd	(y axis)	Va	(x axis) Qa	(y axis)
1.0087	0.7200	1.4234	0.9957	0.7107	0.8799
1.0045	1.0178	2.0130	0.9917	1.0047	1.2443
1.0024	1.1340	2.2506	0.9896	1.1194	1.3912
1.0013	1.1892	2.3604	0.9884	1.1739	1.4591
0.9961	1.4313	2.8468	0.9834	1.4129	1.7597
Qstd slope (m) = 2.00216			Qa slope (m) = 1.25372		
intercept (b) = -0.02053			intercept (b) = -0.01269		
coefficient (r) = 0.99997			coefficient (r) = 0.99997		
y axis = SQRT[H2O(Pa/760) (298/Ta)]			y axis = SQRT[H2O(Ta/Pa)]		

CALCULATIONS

Vstd = Diff. Vol [(Pa-Diff. Hg)/760] (298/Ta)  
 Qstd = Vstd/Time  
 Va = Diff Vol [(Pa-Diff Hg)/Pa]  
 Qa = Va/Time


For subsequent flow rate calculations:

Qstd = 1/m{ [SQRT (H2O(Pa/760) (298/Ta))] - b}  
 Qa = 1/m{ [SQRT H2O(Ta/Pa)] - b}



TISCH ENVIRONMENTAL, INC.  
 145 SOUTH MIAMI AVE.  
 VILLAGE OF CLEVELAND, OH 45002  
 513.467.9000  
 877.263.7610 TOLL FREE  
 513.467.9009 FAX  
 WWW.TISCH-ENV.COM

AIR POLLUTION MONITORING EQUIPMENT

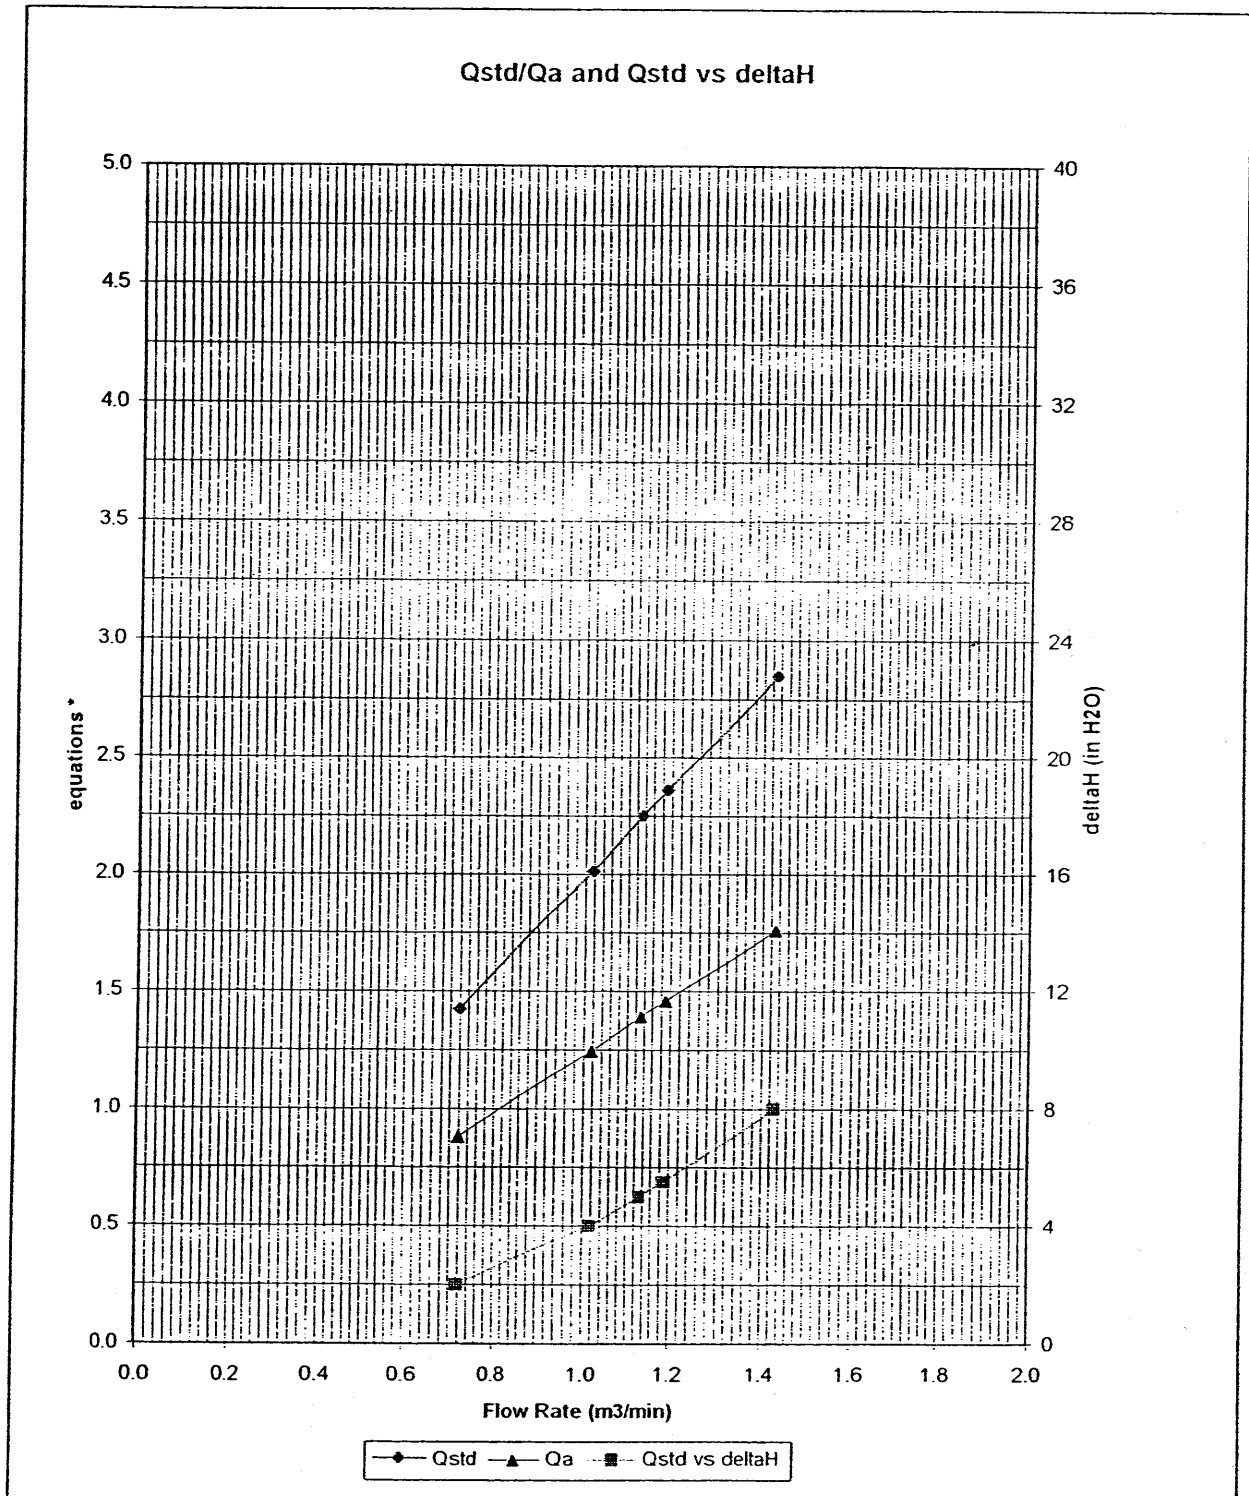

\* y-axis equations:

Qstd series: 
$$\sqrt{\Delta H \left( \frac{P_a}{P_{std}} \right) \left( \frac{T_{std}}{T_a} \right)}$$

Qa series: 
$$\sqrt{\Delta H (T_a / P_a)}$$

# 1378





APPENDIX E  

---

**Calibration certificates  
of 1-hour TSP  
monitoring equipment**



**THERMO ELECTRON**

27 FORGE PARKWAY  
FRANKLIN MA 02038  
TOLL-FREE: 866-282-0430  
TEL: 508-553-6949  
FAX: 508-541-8366  
WWW.THERMO.COM

MASTER # D320 LAST CALIBRATED 10/1/04

---

PDR-1000 CALIBRATION CERTIFICATE

This calibration is traceable to the National Institute of Standards and Testing

SERIAL NUMBER: 3809  
CALIBRATION RATIO: 1.009  
AVG. PDR-1000 CONCENTRATION: 2.91 mg/m3  
CALIBRATION MASTER AVG. CONCENTRATION: 2.45 mg/m3  
DR BACKGROUND CONCENTRATION: .448 mg/m3  
TEMPERATURE: 78F  
HUMIDITY: 22%  
TECHNICIAN K. Lachapelle DATE: 10/6/04

---

**THERMO ELECTRON**

27 FORGE PARKWAY  
FRANKLIN MA 02038  
TOLL-FREE: 866-282-0430  
TEL: 508-553-6949  
FAX: 508-541-8366  
WWW.THERMO.COM

MASTER # D320 LAST CALIBRATED 10/1/04

---

PDR-1000 CALIBRATION CERTIFICATE

This calibration is traceable to the National Institute of Standards and Testing

SERIAL NUMBER: 3893  
CALIBRATION RATIO: .994  
AVG. PDR-1000 CONCENTRATION: 2.74 mg/m3  
CALIBRATION MASTER AVG. CONCENTRATION: 2.42 mg/m3  
DR BACKGROUND CONCENTRATION: .262 mg/m3  
TEMPERATURE: 78F  
HUMIDITY: 22%  
TECHNICIAN K. Lachapelle DATE: 10/6/04

---

**THERMO ELECTRON**

27 FORGE PARKWAY

FRANKLIN MA 02038

TOLL-FREE: 866-282-0430

TEL: 508-553-6949

FAX: 508-541-8366

WWW.THERMO.COM

MASTER # D325 LAST CALIBRATED 12/17/04

---

**PDR-1000 CALIBRATION**

**CERTIFICATE**

This calibration is traceable to the National  
Institute of Standards and Testing

---

SERIAL NUMBER: 4239

CALIBRATION RATIO: 0.9900

AVG. PDR-1000 CONCENTRATION: 2.53 mg/m3

CALIBRATION MASTER AVG. CONCENTRATION: 2.24 mg/m3

DR BACKGROUND CONCENTRATION: .280 mg/m3

TEMPERATURE: 71.7F

HUMIDITY: 21%

TECHNICIAN: DON MCELMAN DATE: 2/03/05

---

**THERMO ELECTRON**  
27 FORGE PARKWAY  
FRANKLIN MA 02038  
TOLL-FREE: 866-282-0430  
TEL: 508-553-6949  
FAX: 508-541-8366  
WWW.THERMO.COM

MASTER # D320 LAST CALIBRATED 10/1/04

---

PDR-1000 CALIBRATION CERTIFICATE

This calibration is traceable to the National Institute of Standards and Testing

SERIAL NUMBER: 4243  
CALIBRATION RATIO: .999  
AVG. PDR-1000 CONCENTRATION: 2.72 mg/m3  
CALIBRATION MASTER AVG. CONCENTRATION: 2.45 mg/m3  
DR BACKGROUND CONCENTRATION: .268 mg/m3  
TEMPERATURE: 78F  
HUMIDITY: 22%

TECHNICIAN K. Lachapelle

DATE: 10/6/04

---

MASTER # 2026

**THERMO ELECTRON**  
27 FORGE PARKWAY  
FRANKLIN MA 02038  
TOLL-FREE: 866-282-0430  
TEL: 508-553-6949  
FAX: 508-541-8366  
WWW.THERMO.COM

---

PDR-1000 CALIBRATION CERTIFICATE

This calibration is traceable to the National Institute of Standards and Testing

SERIAL NUMBER:	<u>4615</u>
CALIBRATION RATIO:	<u>1.008</u>
AVG. PDR-1000 CONCENTRATION:	151 <u>ug/m3</u>
CALIBRATION MASTER AVG. CONCENTRATION:	140 <u>ug/m3</u>
DR BACKGROUND CONCENTRATION:	<u>123 ug/m3</u>
TEMPERATURE:	<u>69F</u>
HUMIDITY:	<u>18%</u>
TECHNICIAN: <u>H. Baccapelle</u>	DATE: <u>1/15/04</u>

---

MASTER # 2026

**THERMO ELECTRON**  
27 FORGE PARKWAY  
FRANKLIN MA 02038  
TOLL-FREE: 866-282-0430  
TEL: 508-553-6949  
FAX: 508-541-8366  
WWW.THERMO.COM

---

PDR-1000 CALIBRATION CERTIFICATE

This calibration is traceable to the National Institute of Standards and Testing

SERIAL NUMBER:	<u>4705</u>
CALIBRATION RATIO:	<u>.991</u>
AVG. PDR-1000 CONCENTRATION:	176 <u>ug/m3</u>
CALIBRATION MASTER AVG. CONCENTRATION:	174 <u>ug/m3</u>
DR BACKGROUND CONCENTRATION:	<u>141 ug/m3</u>
TEMPERATURE:	<u>69F</u>
HUMIDITY:	<u>18%</u>
TECHNICIAN: <u>H. Pachapill</u>	DATE: <u>1/15/04</u>

---





**Thermo Andersen**  
500 Technology Ct., Smyrna, GA 30082  
Toll-Free: 1-800-241-6898 Tel: 770-319-9999  
Fax: 770-319-0336 [www.Thermoandersen.com](http://www.Thermoandersen.com)

*PersonalDataRAM Calibration Certificate*

Record the serial number	
Record the calibration ratio:	S/N 4715
Record the average pDR concentration:	0.994
Record the calibration Master average concentration:	382 $\mu\text{g}/\text{m}^3$
Record the pDR background concentration:	326 $\mu\text{g}/\text{m}^3$
Temperature	124 $\mu\text{g}/\text{m}^3$
Humidity	72 %
Technician:	33 %
	Date: 11-21-03

MASTER # D320

**THERMO ELECTRON**  
27 FORGE PARKWAY  
FRANKLIN MA 02038  
TOLL-FREE: 866-282-0430  
TEL: 508-553-6949  
FAX: 508-541-8366  
WWW.THERMO.COM

---

PDR-1000 CALIBRATION CERTIFICATE

*This calibration is traceable to the National Institute of Standards and Testing*

---

SERIAL NUMBER:	<u>4736</u>
CALIBRATION RATIO:	<u>1.004</u>
AVG. PDR-1000 CONCENTRATION:	2.75 <u>mg/m3</u>
CALIBRATION MASTER AVG. CONCENTRATION:	2.44 <u>mg/m3</u>
DR BACKGROUND CONCENTRATION:	<u>.271 mg/m3</u>
TEMPERATURE:	<u>74F</u>
HUMIDITY:	<u>44%</u>
TECHNICIAN <u>K. Lachapelle</u>	DATE: <u>7/27/04</u>

---



**Thermo Andersen**  
500 Technology Ct., Smyrna, GA 30082  
Toll-Free: 1-800-241-6898 Tel: 770-319-9999  
Fax: 770-319-0336 [www.thermoandersen.com](http://www.thermoandersen.com)

*PersonalDataRAM Calibration Certificate*

Record the serial number	S/N 4496
Record the calibration ratio:	0.998
Record the average pDR concentration:	1249 $\mu\text{g}/\text{m}^3$
Record the calibration Master average concentration:	1070 $\mu\text{g}/\text{m}^3$
Record the pDR background concentration:	189 $\mu\text{g}/\text{m}^3$
Temperature	75 °F
Humidity	45 %
Technician: <i>Roman</i>	Date: 9-25-03

MASTER # D320

**THERMO ELECTRON**  
27 FORGE PARKWAY  
FRANKLIN MA 02038  
TOLL-FREE: 866-282-0430  
TEL: 508-553-6949  
FAX: 508-541-8366  
WWW.THERMO.COM

---

PDR-1000 CALIBRATION CERTIFICATE

This calibration is traceable to the National Institute of Standards and Testing

SERIAL NUMBER:	<u>4492</u>
CALIBRATION RATIO:	<u>1.013</u>
AVG. PDR-1000 CONCENTRATION:	3.04 <u>mg/m3</u>
CALIBRATION MASTER AVG. CONCENTRATION:	2.69 <u>mg/m3</u>
DR BACKGROUND CONCENTRATION:	<u>.291 mg/m3</u>
TEMPERATURE:	<u>75F</u>
HUMIDITY:	<u>52%</u>
TECHNICIAN <u>K. Lachapelle</u>	DATE: <u>7/27/04</u>

---

APPENDIX F

---

**Detailed air quality (1-hour TSP) monitoring results**



**Details of 1-Hour TSP Monitoring**

Date	Receptor No.	Set No.	Time periods		Weather condition	Site condition	Temp. (°C)	Pressure (mmHg)	1-hour TSP Level (µg/m³)	Remarks
			Start	Finish						
3-May-05	WA3	1	9:00	10:00	Fine	Normal Operation	30.0	757.0	161.7	
3-May-05	WA3	2	10:00	11:00	Fine	Normal Operation	30.0	757.0	146.7	
3-May-05	WA3	3	11:00	12:00	Fine	Normal Operation	30.0	757.0	152.5	
3-May-05	WA4	1	9:00	10:00	Fine	Normal Operation	30.0	757.0	214.7	
3-May-05	WA4	2	10:00	11:00	Fine	Normal Operation	30.0	757.0	183.4	
3-May-05	WA4	3	11:00	12:00	Fine	Normal Operation	30.0	757.0	191.6	
3-May-05	WA5	1	9:00	10:00	Fine	Normal Operation	30.0	757.0	253.7	
3-May-05	WA5	2	10:00	11:00	Fine	Normal Operation	30.0	757.0	233.4	
3-May-05	WA5	3	11:00	12:00	Fine	Normal Operation	30.0	757.0	226.8	
3-May-05	WA6	1	13:34	14:34	Fine	Normal Operation	30.0	757.0	186.8	
3-May-05	WA6	2	14:34	15:34	Fine	Normal Operation	30.0	757.0	184.9	
3-May-05	WA6	3	15:34	16:34	Fine	Normal Operation	30.0	757.0	179.4	
3-May-05	WA7	1	13:20	14:20	Fine	Normal Operation	30.0	757.0	228.2	
3-May-05	WA7	2	14:20	15:20	Fine	Normal Operation	30.0	757.0	229.9	
3-May-05	WA7	3	15:20	16:20	Fine	Normal Operation	30.0	757.0	234.0	
3-May-05	WA8	1	13:41	14:41	Fine	Normal Operation	30.0	757.0	227.8	
3-May-05	WA8	2	14:41	15:41	Fine	Normal Operation	30.0	757.0	223.6	
3-May-05	WA8	3	15:41	16:41	Fine	Normal Operation	30.0	757.0	224.0	
3-May-05	WA9	1	13:43	14:43	Fine	Normal Operation	30.0	757.0	210.3	
3-May-05	WA9	2	14:43	15:43	Fine	Normal Operation	30.0	757.0	208.2	
3-May-05	WA9	3	15:43	16:43	Fine	Normal Operation	30.0	757.0	203.6	
3-May-05	WA10	1	9:00	10:00	Fine	Normal Operation	30.0	757.0	248.5	
3-May-05	WA10	2	10:00	11:00	Fine	Normal Operation	30.0	757.0	236.8	
3-May-05	WA10	3	11:00	12:00	Fine	Normal Operation	30.0	757.0	233.6	
3-May-05	WA11	1	9:00	10:00	Fine	Normal Operation	30.0	757.0	227.1	
3-May-05	WA11	2	10:00	11:00	Fine	Normal Operation	30.0	757.0	197.7	
3-May-05	WA11	3	11:00	12:00	Fine	Normal Operation	30.0	757.0	210.4	
6-May-05	WA3	1	9:00	10:00	Fine	Normal Operation	27.0	754.0	231.0	
6-May-05	WA3	2	10:00	11:00	Fine	Normal Operation	27.0	754.0	190.8	
6-May-05	WA3	3	11:00	12:00	Fine	Normal Operation	27.0	754.0	179.1	
6-May-05	WA4	1	9:00	10:00	Fine	Normal Operation	27.0	754.0	210.8	
6-May-05	WA4	2	10:00	11:00	Fine	Normal Operation	27.0	754.0	179.8	
6-May-05	WA4	3	11:00	12:00	Fine	Normal Operation	27.0	754.0	161.5	
6-May-05	WA5	1	9:00	10:00	Fine	Normal Operation	27.0	754.0	237.8	
6-May-05	WA5	2	10:00	11:00	Fine	Normal Operation	27.0	754.0	208.8	
6-May-05	WA5	3	11:00	12:00	Fine	Normal Operation	27.0	754.0	200.6	
6-May-05	WA6	1	13:00	14:00	Fine	Normal Operation	27.0	754.0	248.1	
6-May-05	WA6	2	14:00	15:00	Fine	Normal Operation	27.0	754.0	244.2	
6-May-05	WA6	3	15:00	16:00	Fine	Normal Operation	27.0	754.0	234.2	
6-May-05	WA7	1	13:00	14:00	Fine	Normal Operation	27.0	754.0	214.0	
6-May-05	WA7	2	14:00	15:00	Fine	Normal Operation	27.0	754.0	208.4	
6-May-05	WA7	3	15:00	16:00	Fine	Normal Operation	27.0	754.0	202.9	
6-May-05	WA8	1	13:44	14:44	Fine	Normal Operation	27.0	754.0	169.1	
6-May-05	WA8	2	14:44	15:44	Fine	Normal Operation	27.0	754.0	165.0	
6-May-05	WA8	3	15:44	16:44	Fine	Normal Operation	27.0	754.0	151.2	
6-May-05	WA9	1	13:41	14:41	Fine	Normal Operation	27.0	754.0	248.9	
6-May-05	WA9	2	14:41	15:41	Fine	Normal Operation	27.0	754.0	244.1	
6-May-05	WA9	3	15:41	16:41	Fine	Normal Operation	27.0	754.0	233.2	
6-May-05	WA10	1	9:00	10:00	Fine	Normal Operation	27.0	754.0	250.2	
6-May-05	WA10	2	10:00	11:00	Fine	Normal Operation	27.0	754.0	224.9	
6-May-05	WA10	3	11:00	12:00	Fine	Normal Operation	27.0	754.0	238.4	
6-May-05	WA11	1	9:00	10:00	Fine	Normal Operation	27.0	754.0	158.0	
6-May-05	WA11	2	10:00	11:00	Fine	Normal Operation	27.0	754.0	145.1	
6-May-05	WA11	3	11:00	12:00	Fine	Normal Operation	27.0	754.0	139.2	
12-May-05	WA3	1	13:11	14:11	Fine	Normal Operation	30.0	755.0	190.3	
12-May-05	WA3	2	14:11	15:11	Fine	Normal Operation	30.0	755.0	198.2	
12-May-05	WA3	3	15:11	16:11	Fine	Normal Operation	30.0	755.0	182.9	
12-May-05	WA4	1	13:13	14:13	Fine	Normal Operation	30.0	755.0	155.3	
12-May-05	WA4	2	14:13	15:13	Fine	Normal Operation	30.0	755.0	150.4	
12-May-05	WA4	3	15:13	16:13	Fine	Normal Operation	30.0	755.0	141.7	
12-May-05	WA5	1	13:00	14:00	Fine	Normal Operation	30.0	755.0	154.1	
12-May-05	WA5	2	14:00	15:00	Fine	Normal Operation	30.0	755.0	150.6	
12-May-05	WA5	3	15:00	16:00	Fine	Normal Operation	30.0	755.0	139.6	
12-May-05	WA6	1	13:00	14:00	Fine	Normal Operation	30.0	755.0	225.4	
12-May-05	WA6	2	14:00	15:00	Fine	Normal Operation	30.0	755.0	227.9	
12-May-05	WA6	3	15:00	16:00	Fine	Normal Operation	30.0	755.0	207.0	
12-May-05	WA7	1	9:13	10:13	Fine	Normal Operation	30.0	755.0	130.8	
12-May-05	WA7	2	10:13	11:13	Fine	Normal Operation	30.0	755.0	119.1	
12-May-05	WA7	3	11:13	12:13	Fine	Normal Operation	30.0	755.0	128.8	
12-May-05	WA8	1	8:39	9:39	Fine	Normal Operation	30.0	755.0	211.4	
12-May-05	WA8	2	9:39	10:39	Fine	Normal Operation	30.0	755.0	233.1	
12-May-05	WA8	3	10:39	11:39	Fine	Normal Operation	30.0	755.0	209.4	
12-May-05	WA9	1	9:00	10:00	Fine	Normal Operation	30.0	755.0	180.5	
12-May-05	WA9	2	10:00	11:00	Fine	Normal Operation	30.0	755.0	172.0	
12-May-05	WA9	3	11:00	12:00	Fine	Normal Operation	30.0	755.0	168.2	
12-May-05	WA10	1	8:55	9:55	Fine	Normal Operation	30.0	755.0	173.6	
12-May-05	WA10	2	9:55	10:55	Fine	Normal Operation	30.0	755.0	162.9	
12-May-05	WA10	3	10:55	11:55	Fine	Normal Operation	30.0	755.0	155.9	
12-May-05	WA11	1	9:00	10:00	Fine	Normal Operation	30.0	755.0	224.8	
12-May-05	WA11	2	10:00	11:00	Fine	Normal Operation	30.0	755.0	229.3	
12-May-05	WA11	3	11:00	12:00	Fine	Normal Operation	30.0	755.0	217.4	

**Details of 1-Hour TSP Monitoring**

Date	Receptor No.	Set No.	Time periods		Weather condition	Site condition	Temp. (°C)	Pressure (mmHg)	1-hour TSP Level (µg/m³)	Remarks
			Start	Finish						
18-May-05	WA3	1	13:02	14:02	Fine	Normal Operation	32.0	757.0	177.5	
18-May-05	WA3	2	14:02	15:02	Fine	Normal Operation	32.0	757.0	150.6	
18-May-05	WA3	3	15:02	16:02	Fine	Normal Operation	32.0	757.0	229.3	
18-May-05	WA4	1	13:00	14:00	Fine	Normal Operation	32.0	757.0	223.3	
18-May-05	WA4	2	14:00	15:00	Fine	Normal Operation	32.0	757.0	216.3	
18-May-05	WA4	3	15:00	16:00	Fine	Normal Operation	32.0	757.0	323.9	
18-May-05	WA5	1	9:00	10:00	Fine	Normal Operation	32.0	757.0	216.4	
18-May-05	WA5	2	10:00	11:00	Fine	Normal Operation	32.0	757.0	211.0	
18-May-05	WA5	3	11:00	12:00	Fine	Normal Operation	32.0	757.0	217.3	
18-May-05	WA6	1	9:03	10:03	Fine	Normal Operation	32.0	757.0	143.9	
18-May-05	WA6	2	10:03	11:03	Fine	Normal Operation	32.0	757.0	142.3	
18-May-05	WA6	3	11:03	12:03	Fine	Normal Operation	32.0	757.0	152.1	
18-May-05	WA7	1	13:00	14:00	Fine	Normal Operation	32.0	757.0	102.0	
18-May-05	WA7	2	14:00	15:00	Fine	Normal Operation	32.0	757.0	104.1	
18-May-05	WA7	3	15:00	16:00	Fine	Normal Operation	32.0	757.0	90.2	
18-May-05	WA8	1	13:00	14:00	Fine	Normal Operation	32.0	757.0	187.0	
18-May-05	WA8	2	14:00	15:00	Fine	Normal Operation	32.0	757.0	186.7	
18-May-05	WA8	3	15:00	16:00	Fine	Normal Operation	32.0	757.0	180.6	
18-May-05	WA9	1	9:00	10:00	Fine	Normal Operation	32.0	757.0	115.5	
18-May-05	WA9	2	10:00	11:00	Fine	Normal Operation	32.0	757.0	109.7	
18-May-05	WA9	3	11:00	12:00	Fine	Normal Operation	32.0	757.0	111.1	
18-May-05	WA10	1	9:00	10:00	Fine	Normal Operation	32.0	757.0	174.7	
18-May-05	WA10	2	10:00	11:00	Fine	Normal Operation	32.0	757.0	160.4	
18-May-05	WA10	3	11:00	12:00	Fine	Normal Operation	32.0	757.0	159.6	
18-May-05	WA11	1	9:00	10:00	Fine	Normal Operation	32.0	757.0	207.9	
18-May-05	WA11	2	10:00	11:00	Fine	Normal Operation	32.0	757.0	194.2	
18-May-05	WA11	3	11:00	12:00	Fine	Normal Operation	32.0	757.0	192.2	
24-May-05	WA3	1	8:53	9:53	Fine	Normal Operation	25.0	756.0	188.3	
24-May-05	WA3	2	9:53	10:53	Fine	Normal Operation	25.0	756.0	181.9	
24-May-05	WA3	3	10:53	11:53	Fine	Normal Operation	25.0	756.0	163.8	
24-May-05	WA4	1	8:53	9:53	Fine	Normal Operation	25.0	756.0	185.9	
24-May-05	WA4	2	9:53	10:53	Fine	Normal Operation	25.0	756.0	159.3	
24-May-05	WA4	3	10:53	11:53	Fine	Normal Operation	25.0	756.0	114.6	
24-May-05	WA5	1	13:05	14:05	Fine	Normal Operation	25.0	756.0	155.8	
24-May-05	WA5	2	14:05	15:05	Fine	Normal Operation	25.0	756.0	169.1	
24-May-05	WA5	3	15:05	16:05	Fine	Normal Operation	25.0	756.0	245.3	
24-May-05	WA6	1	12:57	13:57	Fine	Normal Operation	25.0	756.0	180.5	
24-May-05	WA6	2	13:57	14:57	Fine	Normal Operation	25.0	756.0	188.3	
24-May-05	WA6	3	14:57	15:57	Fine	Normal Operation	25.0	756.0	240.9	
24-May-05	WA7	1	13:00	14:00	Fine	Normal Operation	25.0	756.0	87.4	
24-May-05	WA7	2	14:00	15:00	Fine	Normal Operation	25.0	756.0	104.9	
24-May-05	WA7	3	15:00	16:00	Fine	Normal Operation	25.0	756.0	100.5	
24-May-05	WA8	1	13:00	14:00	Fine	Normal Operation	25.0	756.0	206.5	
24-May-05	WA8	2	14:00	15:00	Fine	Normal Operation	25.0	756.0	200.7	
24-May-05	WA8	3	15:00	16:00	Fine	Normal Operation	25.0	756.0	205.0	
24-May-05	WA9	1	8:54	9:54	Fine	Normal Operation	25.0	756.0	63.0	
24-May-05	WA9	2	9:54	10:54	Fine	Normal Operation	25.0	756.0	92.7	
24-May-05	WA9	3	10:54	11:54	Fine	Normal Operation	25.0	756.0	50.2	
24-May-05	WA10	1	8:59	9:59	Fine	Normal Operation	25.0	756.0	203.9	
24-May-05	WA10	2	9:59	10:59	Fine	Normal Operation	25.0	756.0	195.8	
24-May-05	WA10	3	10:59	11:59	Fine	Normal Operation	25.0	756.0	208.2	
24-May-05	WA11	1	8:55	9:55	Fine	Normal Operation	25.0	756.0	183.4	
24-May-05	WA11	2	9:55	10:55	Fine	Normal Operation	25.0	756.0	178.6	
24-May-05	WA11	3	10:55	11:55	Fine	Normal Operation	25.0	756.0	194.4	
30-May-05	WA3	1	9:06	10:06	Fine	Normal Operation	29.0	756.0	158.4	
30-May-05	WA3	2	10:06	11:06	Fine	Normal Operation	29.0	756.0	142.6	
30-May-05	WA3	3	11:06	12:06	Fine	Normal Operation	29.0	756.0	54.3	
30-May-05	WA4	1	8:51	9:51	Fine	Normal Operation	29.0	756.0	233.6	
30-May-05	WA4	2	9:51	10:51	Fine	Normal Operation	29.0	756.0	229.7	
30-May-05	WA4	3	10:51	11:51	Fine	Normal Operation	29.0	756.0	174.0	
30-May-05	WA5	1	12:53	13:53	Fine	Normal Operation	29.0	756.0	198.6	
30-May-05	WA5	2	13:53	14:53	Fine	Normal Operation	29.0	756.0	218.7	
30-May-05	WA5	3	14:53	15:53	Fine	Normal Operation	29.0	756.0	178.8	
30-May-05	WA6	1	13:01	14:01	Fine	Normal Operation	29.0	756.0	122.9	
30-May-05	WA6	2	14:01	15:01	Fine	Normal Operation	29.0	756.0	144.3	
30-May-05	WA6	3	15:01	16:01	Fine	Normal Operation	29.0	756.0	93.5	
30-May-05	WA7	1	13:07	14:07	Fine	Normal Operation	29.0	756.0	217.7	
30-May-05	WA7	2	14:07	15:07	Fine	Normal Operation	29.0	756.0	220.9	
30-May-05	WA7	3	15:07	16:07	Fine	Normal Operation	29.0	756.0	209.6	
30-May-05	WA8	1	12:56	13:56	Fine	Normal Operation	29.0	756.0	180.6	
30-May-05	WA8	2	13:56	14:56	Fine	Normal Operation	29.0	756.0	174.8	
30-May-05	WA8	3	14:56	15:56	Fine	Normal Operation	29.0	756.0	169.6	
30-May-05	WA9	1	8:54	9:54	Fine	Normal Operation	29.0	756.0	163.1	
30-May-05	WA9	2	9:54	10:54	Fine	Normal Operation	29.0	756.0	166.1	
30-May-05	WA9	3	10:54	11:54	Fine	Normal Operation	29.0	756.0	148.7	
30-May-05	WA10	1	9:01	10:01	Fine	Normal Operation	29.0	756.0	206.1	
30-May-05	WA10	2	10:01	11:01	Fine	Normal Operation	29.0	756.0	208.4	
30-May-05	WA10	3	11:01	12:01	Fine	Normal Operation	29.0	756.0	194.3	
30-May-05	WA11	1	8:53	9:53	Fine	Normal Operation	29.0	756.0	185.1	
30-May-05	WA11	2	9:53	10:53	Fine	Normal Operation	29.0	756.0	184.3	
30-May-05	WA11	3	10:53	11:53	Fine	Normal Operation	29.0	756.0	170.5	



APPENDIX G  

---

**Detailed air quality (24-  
hour TSP) monitoring  
results**



**Details of 24-Hour TSP Monitoring**

Date	Receptor No.	Weather condition	Site condition	Filter Weight (g)		TSP weight (g)	Flow Rate (m <sup>3</sup> /min)		Average Flow Rate (m <sup>3</sup> /min)	Elapse Time		Sampling Time (mins.)	Total vol. (m <sup>3</sup> )	24-hour TSP Level (µg/m <sup>3</sup> )	Remarks
				Initial	Final		Initial	Final		Start	Finish				
6-May-05	WA3	Fine	Normal Operation	2.8705	2.9482	0.0777	1.2096	1.1618	1.1857	5109.31	5133.31	1440.00	1707.41	45.5	
6-May-05	WA4	Fine	Normal Operation	2.8835	2.9855	0.1020	0.9061	0.9177	0.9119	5197.97	5221.97	1440.00	1313.14	77.7	
6-May-05	WA5	Fine	Normal Operation	2.8886	2.9973	0.1087	1.1398	1.1504	1.1451	5164.27	5188.27	1440.00	1648.94	65.9	
6-May-05	WA6	Fine	Normal Operation	2.9104	3.0150	0.1046	1.2261	1.2868	1.2565	4515.85	4539.85	1440.00	1809.29	57.8	
6-May-05	WA7	Fine	Normal Operation	2.9182	2.9659	0.0477	1.0006	1.0077	1.0042	5179.24	5203.24	1440.00	1445.98	33.0	
6-May-05	WA8	Fine	Normal Operation	2.9088	2.9987	0.0899	1.4374	1.4201	1.4288	5232.89	5256.89	1440.00	2057.40	43.7	
6-May-05	WA9	Fine	Normal Operation	2.9243	3.0008	0.0765	1.0711	1.1574	1.1143	5244.07	5268.07	1440.00	1604.52	47.7	
6-May-05	WA10	Fine	Normal Operation	2.9228	3.0142	0.0914	1.1868	1.1987	1.1928	5135.92	5159.92	1440.00	1717.56	53.2	
6-May-05	WA11	Fine	Normal Operation	2.9219	3.0973	0.1754	1.5578	1.5423	1.5501	5333.10	5357.10	1440.00	2232.07	78.6	
11-May-05	WA3	Cloudy	Normal Operation	2.9147	3.0156	0.1009	1.2790	1.2784	1.2787	5133.31	5157.31	1440.00	1841.33	54.8	
11-May-05	WA4	Cloudy	Normal Operation	2.9166	3.0149	0.0983	0.9169	0.9163	0.9166	5221.97	5245.97	1440.00	1319.90	74.5	
11-May-05	WA5	Cloudy	Normal Operation	2.9045	3.0212	0.1167	1.1496	1.1491	1.1494	5188.27	5212.27	1440.00	1655.06	70.5	
11-May-05	WA6	Cloudy	Normal Operation	2.9135	3.0614	0.1479	1.1827	1.2856	1.2342	4539.85	4563.85	1440.00	1777.18	83.2	
11-May-05	WA7	Cloudy	Normal Operation	2.9422	3.0240	0.0818	1.1173	1.0619	1.0896	5203.24	5227.24	1440.00	1569.02	52.1	
11-May-05	WA8	Cloudy	Normal Operation	2.9296	3.0082	0.0786	1.2186	1.2182	1.2184	5256.89	5280.89	1440.00	1754.50	44.8	
11-May-05	WA9	Cloudy	Normal Operation	2.9268	3.0019	0.0751	1.1564	1.1558	1.1561	5270.09	5294.09	1440.00	1664.78	45.1	
11-May-05	WA10	Cloudy	Normal Operation	2.9334	2.9904	0.0570	1.1323	1.1318	1.1321	5159.92	5183.92	1440.00	1630.15	35.0	
11-May-05	WA11	Cloudy	Normal Operation	2.9291	3.0400	0.1109	1.4187	1.4181	1.4184	5357.10	5381.10	1440.00	2042.50	54.3	
17-May-05	WA3	Fine	Normal Operation	2.8931	2.9418	0.0487	0.9138	0.9171	0.9155	5157.31	5181.31	1440.00	1318.25	36.9	
17-May-05	WA4	Fine	Normal Operation	2.8981	2.9631	0.0650	0.9017	0.9061	0.9039	5245.97	5269.97	1440.00	1301.62	49.9	
17-May-05	WA5	Fine	Normal Operation	2.9142	3.0618	0.1476	1.2866	1.2911	1.2889	5212.27	5236.27	1440.00	1855.94	79.5	
17-May-05	WA6	Fine	Normal Operation	2.9141	3.0309	0.1168	1.3250	1.3287	1.3269	4566.05	4590.05	1440.00	1910.66	61.1	
17-May-05	WA7	Fine	Normal Operation	2.9337	2.9689	0.0352	1.0523	1.0006	1.0265	5227.24	5251.24	1440.00	1478.09	23.8	
17-May-05	WA8	Fine	Normal Operation	2.9256	2.9747	0.0491	1.4898	1.4943	1.4921	5280.89	5304.89	1440.00	2148.55	22.9	
17-May-05	WA9	Fine	Normal Operation	2.9404	2.9939	0.0535	1.0663	1.0711	1.0687	5294.09	5318.09	1440.00	1538.93	34.8	
17-May-05	WA10	Fine	Normal Operation	2.8926	2.9487	0.0561	1.1176	1.1219	1.1198	5183.92	5207.92	1440.00	1612.44	34.8	
17-May-05	WA11	Fine	Normal Operation	2.9087	2.9947	0.0860	1.4613	1.4668	1.4641	5381.10	5405.10	1440.00	2108.23	40.8	
23-May-05	WA3	Cloudy	Normal Operation	2.9022	2.9647	0.0625	1.4833	1.4476	1.4655	5181.31	5205.31	1440.00	2110.25	29.6	
23-May-05	WA4	Cloudy	Normal Operation	2.9276	3.0406	0.1130	0.9151	0.9096	0.9124	5269.97	5293.98	1440.00	1314.33	86.0	
23-May-05	WA5	Cloudy	Normal Operation	2.9282	3.0342	0.1060	1.1479	1.1430	1.1455	5236.27	5260.27	1440.00	1649.45	64.3	
23-May-05	WA6	Cloudy	Normal Operation	2.8937	3.0896	0.1959	1.3620	1.3573	1.3597	4590.05	4614.05	1440.00	1957.90	100.1	
23-May-05	WA7	Cloudy	Normal Operation	2.9037	2.9394	0.0357	1.0611	1.0575	1.0593	5251.24	5275.24	1440.00	1525.39	23.4	
23-May-05	WA8	Cloudy	Normal Operation	2.9043	2.9839	0.0796	1.3889	1.3838	1.3864	5304.89	5328.89	1440.00	1996.34	39.9	
23-May-05	WA9	Cloudy	Normal Operation	2.9108	2.9712	0.0604	1.1543	1.1481	1.1512	5318.09	5342.09	1440.00	1657.73	36.4	
23-May-05	WA10	Cloudy	Normal Operation	2.9138	2.9957	0.0819	1.3922	1.3858	1.3890	5207.92	5231.92	1440.00	2000.16	40.9	
23-May-05	WA11	Cloudy	Normal Operation	2.9030	3.0253	0.1223	1.0497	1.0447	1.0472	5405.10	5429.10	1440.00	1507.97	81.1	
28-May-05	WA3	Fine	Normal Operation	2.8781	2.9460	0.0679	1.3033	1.3635	1.3334	5205.31	5229.31	1440.00	1920.10	35.4	
28-May-05	WA4	Fine	Normal Operation	2.8822	2.9941	0.1119	0.9118	0.9132	0.9125	5293.98	5317.98	1440.00	1314.00	85.2	
28-May-05	WA5	Fine	Normal Operation	2.8864	2.9632	0.0768	1.1450	1.1463	1.1457	5260.27	5284.27	1440.00	1649.74	46.6	
28-May-05	WA6	Fine	Normal Operation	2.8793	3.0695	0.1902	1.3335	1.3347	1.3341	4614.05	4639.05	1500.00	2001.15	95.0	
28-May-05	WA7	Fine	Normal Operation	2.8997	2.9224	0.0227	1.0041	1.0049	1.0045	5275.24	5299.24	1440.00	1446.48	15.7	
28-May-05	WA8	Fine	Normal Operation	2.8920	2.9880	0.0960	1.4430	1.4444	1.4437	5328.89	5352.89	1440.00	2078.93	46.2	
28-May-05	WA9	Fine	Normal Operation	2.8763	2.9214	0.0451	0.7110	0.7122	0.7116	5366.09	5390.09	1440.00	1024.70	44.0	
28-May-05	WA10	Fine	Normal Operation	2.9230	3.0020	0.0790	1.5190	1.5208	1.5199	5220.85	5244.85	1440.00	2188.66	36.1	
28-May-05	WA11	Fine	Normal Operation	2.9260	2.9995	0.0735	1.0467	1.0480	1.0474	5429.10	5453.10	1440.00	1508.18	48.7	

APPENDIX H


---

**Detailed wind  
monitoring data for the  
air quality monitoring  
period**



## Wind Monitoring Data – Wind Speed during air quality monitoring in May 2005


(公里/小時) (於香港時間 2005 年 5 月 6 日 0 時 0 分更新) (Updated at 00:00H on 6 May 2005) (km/h)

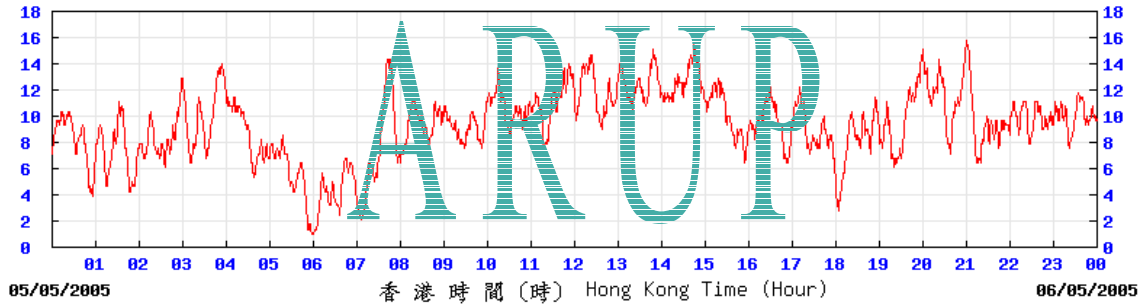

sek

© 香港天文台 Hong Kong Observatory


(公里/小時) (於香港時間 2005 年 5 月 7 日 0 時 0 分更新) (Updated at 00:00H on 7 May 2005) (km/h)

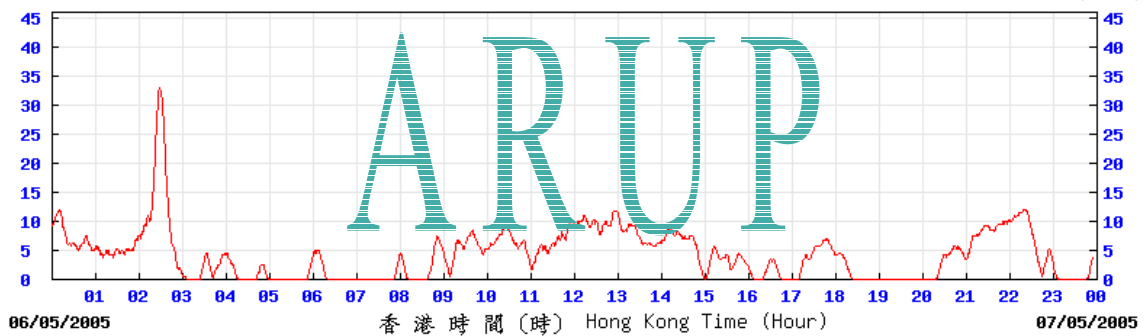

sek

© 香港天文台 Hong Kong Observatory


(公里/小時) (於香港時間 2005 年 5 月 12 日 0 時 0 分更新) (Updated at 00:00H on 12 May 2005) (km/h)

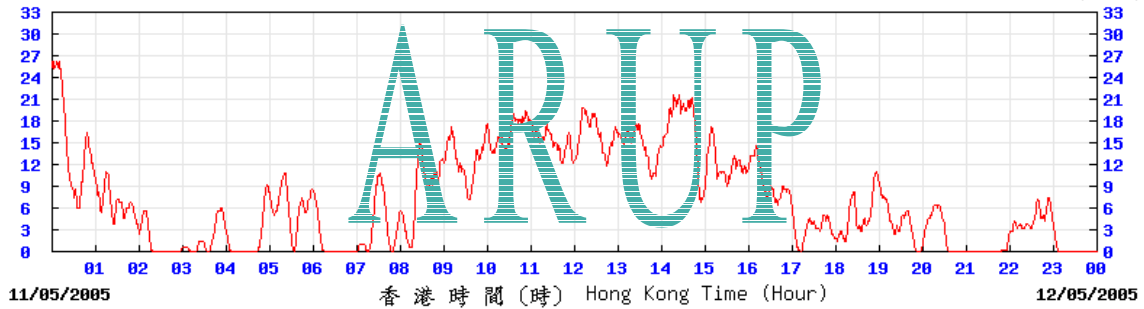

sek

© 香港天文台 Hong Kong Observatory


(公里/小時) (於香港時間 2005 年 5 月 13 日 0 時 0 分更新) (Updated at 00:00H on 13 May 2005) (km/h)

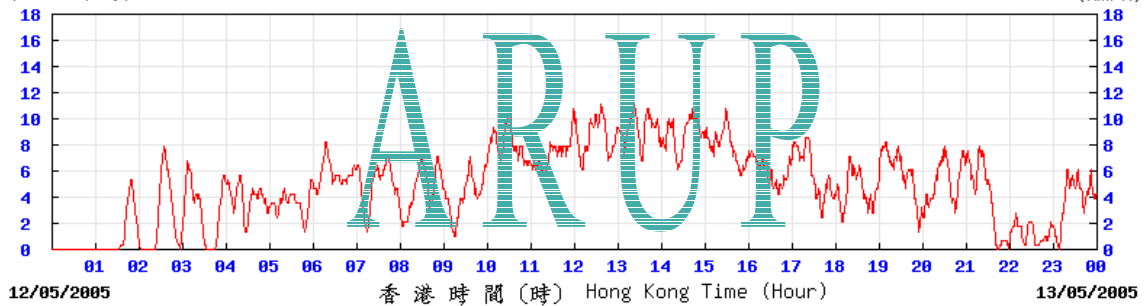

sek


© 香港天文台 Hong Kong Observatory

(公里/小時) (於香港時間 2005 年 5 月 18 日 0 時 0 分更新) (Updated at 00:00H on 18 May 2005) (km/h)

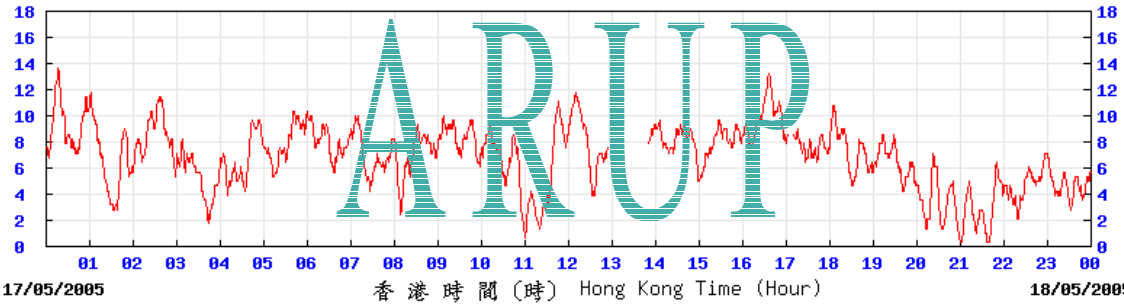


sek © 香港天文台 Hong Kong Observatory

(公里/小時) (於香港時間 2005 年 5 月 19 日 0 時 10 分更新) (Updated at 00:10H on 19 May 2005) (km/h)

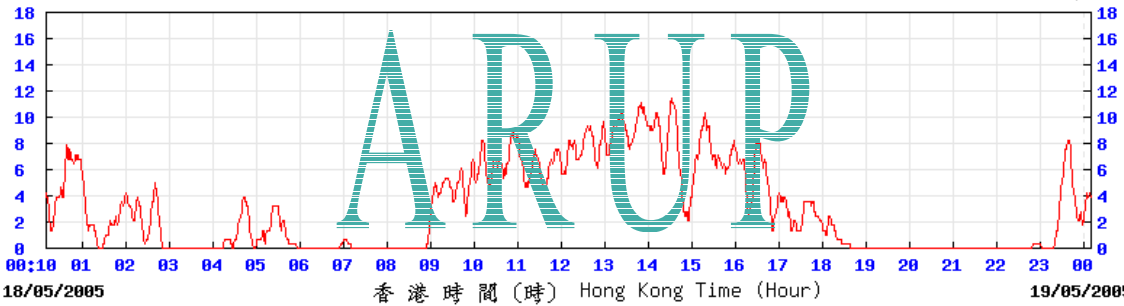


sek © 香港天文台 Hong Kong Observatory

(公里/小時) (於香港時間 2005 年 5 月 24 日 0 時 0 分更新) (Updated at 00:00H on 24 May 2005) (km/h)

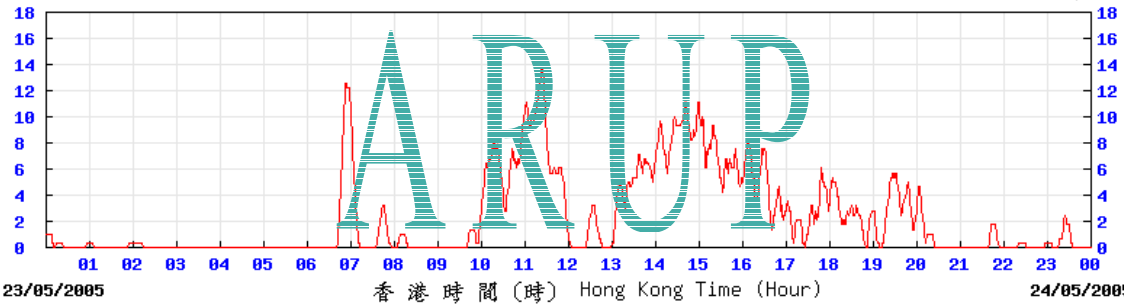


sek © 香港天文台 Hong Kong Observatory

(公里/小時) (於香港時間 2005 年 5 月 25 日 0 時 0 分更新) (Updated at 00:00H on 25 May 2005) (km/h)

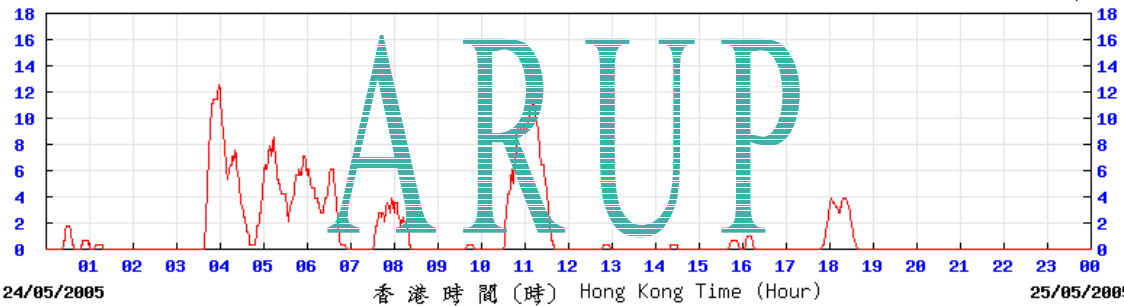

sek © 香港天文台 Hong Kong Observatory


(公里/小時) (於香港時間 2005 年 5月28日 0時 0分更新) (Updated at 00:00H on 28 May 2005) (km/h)

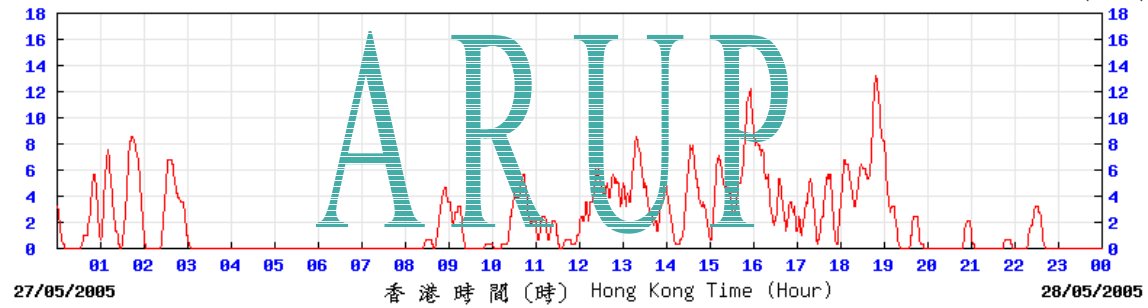

sek

© 香港天文台 Hong Kong Observatory

(公里/小時) (於香港時間 2005 年 5月31日23時20分更新) (Updated at 23:20H on 31 May 2005) (km/h)

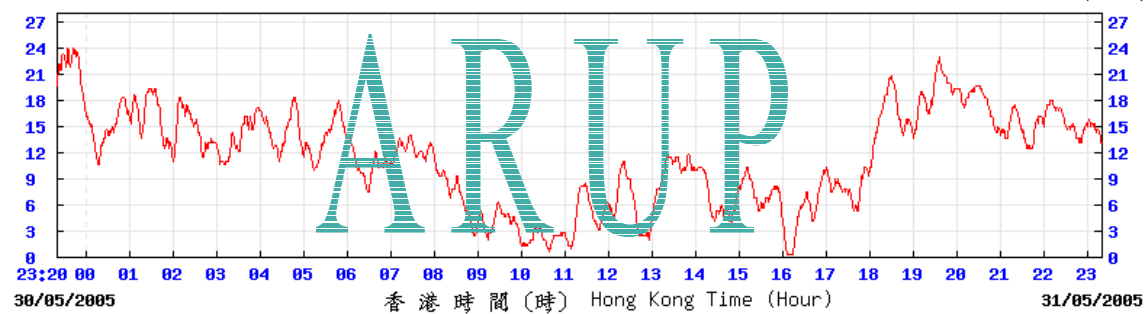

cph

© 香港天文台 Hong Kong Observatory



APPENDIX I

---

**Calibration certificates  
of noise monitoring  
equipment**



Level 5 Festival Walk  
80 Tat Chee Avenue  
Kowloon Tong, Kowloon  
HONG KONG

AAc Certificate No. 2004002

Tel: +852 2268 3216

Fax: +852 2268 3950


**CERTIFICATE OF CONFORMITY**


<u>Description of Test Instrument</u>	<u>Type No</u>	<u>Serial No</u>
Bruel & Kjaer Acoustic Calibrator	4231	2314016

Date of Test: 16 July 2004

Carried out by: Steven Wong

Approved by: William Ng

Signature: 

Signature: 

Ambient Conditions During Test	
Atmospheric Pressure:	1KPa
Air Temperature:	28°C
Relative Humidity:	58%

This document is to certify that the above Test Instrumentation did conform to the manufacturer's original specification on the date of the test. Any adjustments that were required to bring the instrumentation back into specification are duly noted in this document. The tests were carried out using the reference calibrator described below.

<u>Description of Reference Calibrator</u>	<u>Type No</u>	<u>Serial No</u>
Brüel & Kjær Multi Frequency Calibrator	4226	1531372
Brüel & Kjær Coupler	UA0915	1531372

Certificate of Calibration Serial No.	12701
By Brüel & Kjær (UK) Ltd Calibration Date:	20 April 2004
NAMAS Accredited Calibration Laboratory No.	0174

The reference calibrator, Type 4226, has traceable calibration back to National Measurement Standards. As such it is used as Arup Acoustics own 'Primary Standard' and is used only for controlled laboratory calibration tests on all sound measuring equipment owned by Arup Acoustics.

Footnote:

Arup Acoustics is not a registered NAMAS accredited calibration laboratory. This certificate is for internal use only (unless otherwise authorised) and is part of Arup Acoustics development and commitment to QC and QA procedures.

Level 5 Festival Walk  
80 Tat Chee Avenue  
Kowloon Tong, Kowloon  
HONG KONG

AAc Certificate No. 2004001

Tel: +852 2268 3216

Fax: +852 2268 3950


**CERTIFICATE OF CONFORMITY**


<u>Description of Test Instrument</u>	<u>Type No</u>	<u>Serial No</u>
Bruel & Kjaer Acoustic Calibrator	4230	1233887

Date of Test: 16 July 2004

Carried out by: Steven Wong

Approved by: William Ng

Signature: 

Signature: 

Ambient Conditions During Test	
Atmospheric Pressure:	1KPa
Air Temperature:	28°C
Relative Humidity:	58%

This document is to certify that the above Test Instrumentation did conform to the manufacturer's original specification on the date of the test. Any adjustments that were required to bring the instrumentation back into specification are duly noted in this document. The tests were carried out using the reference calibrator described below.

<u>Description of Reference Calibrator</u>	<u>Type No</u>	<u>Serial No</u>
Brüel & Kjær Multi Frequency Calibrator	4226	1531372
Brüel & Kjær Coupler	UA0915	1531372
Certificate of Calibration Serial No.	12701	
By Brüel & Kjær (UK) Ltd Calibration Date:	20 April 2004	
NAMAS Accredited Calibration Laboratory No.	0174	

The reference calibrator, Type 4226, has traceable calibration back to National Measurement Standards. As such it is used as Arup Acoustics own 'Primary Standard' and is used only for controlled laboratory calibration tests on all sound measuring equipment owned by Arup Acoustics.

Footnote:

Arup Acoustics is not a registered NAMAS accredited calibration laboratory. This certificate is for internal use only (unless otherwise authorised) and is part of Arup Acoustics development and commitment to QC and QA procedures.



## CERTIFICATE OF CALIBRATION

Certificate No. : 2KS040905-3

Page 1 of 2

### Calibration of :

<b>Description</b> :	Sound Level Meter	,	Microphone
<b>Manufacture</b> :	Brüel & Kjær		
<b>Type No.</b> :	2238	,	4188
<b>Serial No.</b> :	2320694	,	2274284

**Client :** Ove Arup & Partners Hong Kong Ltd.  
Level 5, Festival Walk,  
80 Tat Chee Avenue,  
Kowloon Tong, Kowloon,  
Hong Kong.

### Calibration Conditions :

<b>Air Temperature</b> :	23.2	°C
<b>Air Pressure</b> :	101.2	kPa
<b>Relative Humidity</b> :	59	%

### Test Specifications :

The Sound Level Meter has been calibrated in accordance with the requirements as specified in IEC 60651 and IEC 60804 type 1, and vendor specific procedures.


The measurements has been performed with the assistance of :  
Brüel & Kjær's Sound Level Meter Calibration System B&K 9600 CAL2238A, Ver.25.10.1999  
The standard(s) and instrument(s) used in the calibration are traceable to international standard and are calibrated on a schedule which is adjusted to maintain the required accuracy level.


### Test Result :

A list of the performed (sub) tests is stated on page 2 of this certificate. Actual Measurement are documented on worksheet.

Date of Calibration : 10 September, 2004  
Calibrated By :

Certificate issued : 10 September, 2004  
Approved signatory :

  
Fox Ng

  
Jacky Leung

Reproduction of the complete certificate is allowed. Parts of the certificate may only be reproduced after written permission.

**CERTIFICATE OF CALIBRATION**

**Certificate No. :** 2KS040905-3

**Page 2 of 2**

**Results :**

List of performed (sub) test with test status:

“OK” Means the result of the (sub)test is Inside the tolerances stated in the test specifications.

“ - ” Means the result of the (sub)test is Outside these tolerances.

<b>Test :</b>	<b>Subtest :</b>	<b>Status :</b>
Noise	A	OK
Noise	C	OK
Noise	Lin	OK
Frequency Weighting	A	OK
Frequency Weighting	C	OK
Frequency Weighting	Lin	OK
Level Range Control	1000 Hz	OK
Linearity Range	SPL 10dB 4000 Hz	OK
Linearity Range	SPL 1dB 1000 Hz	OK
Linearity Range	Leq	OK
Linearity Range	SEL	OK
RMS Detector	CF 3	OK
RMS Detector	CF 5	OK
RMS Detector	CF 10	OK
RMS Detector	Symmetry	OK
Time Weighting	Difference Indication	OK
Time Weighting	Single Burst FAST	OK
Time Weighting	Single Burst SLOW	OK
Time Weighting	Single Burst IMPULSE	OK
Time Weighting	Repetitive Burst	OK
Time Weighting	Peak	OK
Time Averaging		OK
Pulse Range		OK
Overload	SPL	OK
Overload	SEL	OK
Acoustic Response	A	OK
Acoustic Response	Lin	OK

**Calibration Equipment :**

Brüel & Kjær's Sound Level Meter Calibration System B&K 9600 CAL2238A, Ver.25.10.1999

<b>Description :</b>	<b>Make &amp; Model :</b>	<b>Serial No. :</b>	<b>Last Cal. Date :</b>	<b>Traceable to:</b>
Digital Multi-meter	Datron 1281	27361	08 Oct, 2003	HKSL (HOKLAS)
Sine/Noise Generator	B&K 1049	1314978	Test	B&K Conformance
Test Waveform Generator	B&K 5918	1482949	Test	B&K Conformance
Acoustical Calibrator	B&K 4226	1551627	22 Jun, 2004	NPL via B&K (UKAS)

Calibrated By : *Pax Ng*  
Date : 10 September, 2004

Checked By : *Janly*  
Date : 10 September, 2004



## CERTIFICATE OF CALIBRATION

Certificate No. : 2KS040905-4

Page 1 of 2

### Calibration of :

Description :	Sound Level Meter	,	Microphone
Manufacture :	Brüel & Kjær		
Type No. :	2238	,	4188
Serial No. :	2320696	,	2274286

**Client :** Ove Arup & Partners Hong Kong Ltd.  
Level 5, Festival Walk,  
80 Tat Chee Avenue,  
Kowloon Tong, Kowloon,  
Hong Kong.

### Calibration Conditions :

Air Temperature :	23.2	°C
Air Pressure :	101.2	kPa
Relative Humidity :	59	%

### Test Specifications :


The Sound Level Meter has been calibrated in accordance with the requirements as specified in IEC 60651 and IEC 60804 type 1, and vendor specific procedures.

The measurements has been performed with the assistance of :  
Brüel & Kjær's Sound Level Meter Calibration System B&K 9600 CAL2238A, Ver.25.10.1999  
The standard(s) and instrument(s) used in the calibration are traceable to international standard and are calibrated on a schedule which is adjusted to maintain the required accuracy level.


### Test Result :

A list of the performed (sub) tests is stated on page 2 of this certificate. Actual Measurement are documented on worksheet.

Date of Calibration : 10 September, 2004  
Calibrated By :

  
Fox Ng

Certificate issued : 10 September, 2004  
Approved signatory :

  
Jacky Leung

Reproduction of the complete certificate is allowed. Parts of the certificate may only be reproduced after written permission.

## CERTIFICATE OF CALIBRATION

**Certificate No. :** 2KS040905-4

**Page 2 of 2**

**Results :**

List of performed (sub) test with test status:

“OK” Means the result of the (sub)test is Inside the tolerances stated in the test specifications.


“ - ” Means the result of the (sub)test is Outside these tolerances.


Test :	Subtest :	Status :
Noise	A	OK
Noise	C	OK
Noise	Lin	OK
Frequency Weighting	A	OK
Frequency Weighting	C	OK
Frequency Weighting	Lin	OK
Level Range Control	1000 Hz	OK
Linearity Range	SPL 10dB 4000 Hz	OK
Linearity Range	SPL 1dB 1000 Hz	OK
Linearity Range	Leq	OK
Linearity Range	SEL	OK
RMS Detector	CF 3	OK
RMS Detector	CF 5	OK
RMS Detector	CF 10	OK
RMS Detector	Symmetry	OK
Time Weighting	Difference Indication	OK
Time Weighting	Single Burst FAST	OK
Time Weighting	Single Burst SLOW	OK
Time Weighting	Single Burst IMPULSE	OK
Time Weighting	Repetitive Burst	OK
Time Weighting	Peak	OK
Time Averaging		OK
Pulse Range		OK
Overload	SPL	OK
Overload	SEL	OK
Acoustic Response	A	OK
Acoustic Response	Lin	OK

**Calibration Equipment :**

Brüel & Kjær's Sound Level Meter Calibration System B&K 9600 CAL2238A, Ver.25.10.1999

Description :	Make & Model :	Serial No. :	Last Cal. Date :	Traceable to:
Digital Multi-meter	Datron 1281	27361	08 Oct, 2003	HKSL (HOKLAS)
Sine/Noise Generator	B&K 1049	1314978	Test	B&K Conformance
Test Waveform Generator	B&K 5918	1482949	Test	B&K Conformance
Acoustical Calibrator	B&K 4226	1551627	22 Jun, 2004	NPL via B&K (UKAS)

Calibrated By :   
Date : 10 September, 2004

Checked By :   
Date : 10 September, 2004





## CERTIFICATE OF CALIBRATION

Certificate No. : 2KS040905-5

Page 1 of 2

### Calibration of :

Description :	Sound Level Meter	,	Microphone
Manufacture :	Brüel & Kjær		
Type No. :	2238	,	4188
Serial No. :	2320707	,	2179479

**Client :**  
Ove Arup & Partners Hong Kong Ltd.  
Level 5, Festival Walk,  
80 Tat Chee Avenue,  
Kowloon Tong, Kowloon,  
Hong Kong.

### Calibration Conditions :

Air Temperature :	23.1	°C
Air Pressure :	101.4	kPa
Relative Humidity :	58	%

### Test Specifications :

The Sound Level Meter has been calibrated in accordance with the requirements as specified in IEC 60651 and IEC 60804 type 1, and vendor specific procedures.


The measurements has been performed with the assistance of :  
Brüel & Kjær's Sound Level Meter Calibration System B&K 9600 CAL2238A, Ver.25.10.1999  
The standard(s) and instrument(s) used in the calibration are traceable to international standard and are calibrated on a schedule which is adjusted to maintain the required accuracy level.

### Test Result :

A list of the performed (sub) tests is stated on page 2 of this certificate. Actual Measurement are documented on worksheet.


Date of Calibration : 09 September, 2004

Calibrated By :

  
Fox Ng

Certificate issued : 10 September, 2004

Approved signatory :

  
Jacky Leung

Reproduction of the complete certificate is allowed. Parts of the certificate may only be reproduced after written permission.

## CERTIFICATE OF CALIBRATION

Certificate No. : 2KS040905-5

Page 2 of 2

### Results :

List of performed (sub) test with test status:

“OK” Means the result of the (sub)test is Inside the tolerances stated in the test specifications.


“ - ” Means the result of the (sub)test is Outside these tolerances.

Test :	Subtest :	Status :
Noise	A	OK
Noise	C	OK
Noise	Lin	OK
Frequency Weighting	A	OK
Frequency Weighting	C	OK
Frequency Weighting	Lin	OK
Level Range Control	1000 Hz	OK
Linearity Range	SPL 10dB 4000 Hz	OK
Linearity Range	SPL 1dB 1000 Hz	OK
Linearity Range	Leq	OK
Linearity Range	SEL	OK
RMS Detector	CF 3	OK
RMS Detector	CF 5	OK
RMS Detector	CF 10	OK
RMS Detector	Symmetry	OK
Time Weighting	Difference Indication	OK
Time Weighting	Single Burst FAST	OK
Time Weighting	Single Burst SLOW	OK
Time Weighting	Single Burst IMPULSE	OK
Time Weighting	Repetitive Burst	OK
Time Weighting	Peak	OK
Time Averaging		OK
Pulse Range		OK
Overload	SPL	OK
Overload	SEL	OK
Acoustic Response	A	OK
Acoustic Response	Lin	OK

### Calibration Equipment :

Brüel & Kjær's Sound Level Meter Calibration System B&K 9600 CAL2238A, Ver.25.10.1999

Description :	Make & Model :	Serial No. :	Last Cal. Date :	Traceable to :
Digital Multi-meter	Datron 1281	27361	08 Oct, 2003	HKSCS (HOKLAS)
Sine/Noise Generator	B&K 1049	1314978	Test	B&K Conformance
Test Waveform Generator	B&K 5918	1482949	Test	B&K Conformance
Acoustical Calibrator	B&K 4226	1551627	22 Jun, 2004	NPL via B&K (UKAS)

Calibrated By :   
Date : 09 September, 2004

Checked By :   
Date : 10 September, 2004



## CERTIFICATE OF CALIBRATION

Certificate No. : 2KS040905-1

Page 1 of 2

### Calibration of :

Description	: Sound Level Meter	,	Microphone
Manufacture	: Brüel & Kjær		
Type No.	: 2231	,	4188
Serial No.	: 1294630	,	2179478

Client : Ove Arup & Partners Hong Kong Ltd.  
Level 5, Festival Walk,  
80 Tat Chee Avenue,  
Kowloon Tong, Kowloon,  
Hong Kong.

### Calibration Conditions :

Air Temperature	: 23.2 °C
Air Pressure	: 101.2 kPa
Relative Humidity	: 59 %

### Test Specifications :

The Sound Level Meter has been calibrated in accordance with the requirements as specified in IEC 60651 and IEC 60804 type 1, and vendor specific procedures.


The measurements has been performed with the assistance of :  
Brüel & Kjær's Sound Level Meter Calibration System B&K 9600 C2231\_10, Ver.03.11.1995  
The standard(s) and instrument(s) used in the calibration are traceable to international standard and are calibrated on a schedule which is adjusted to maintain the required accuracy level.


### Test Result :

A list of the performed (sub) tests is stated on page 2 of this certificate. Actual Measurement are documented on worksheet.

Date of Calibration: 10 September, 2004  
Calibrated By :

Certificate issued: 10 September, 2004  
Approved Signatory :

  
\_\_\_\_\_  
Fox Ng

  
\_\_\_\_\_  
Jacky Leung

Reproduction of the complete certificate is allowed. Parts of the certificate may only be reproduced after written permission.

## CERTIFICATE OF CALIBRATION

Certificate No. : 2KS040905-1

Page 2 of 2

### Results :

List of performed (sub) test with test status:

“OK” Means the result of the (sub)test is Inside the tolerances stated in the test specifications.

“-” Means the result of the (sub)test is Outside these tolerances.

Test :	Subtest :	Status :
Noise	A	OK
Noise	C	OK
Noise	Lin	OK
Noise	Lin Lim	OK
Frequency Weighting	A	OK
Frequency Weighting	C	OK
Frequency Weighting	Lin	OK
Frequency Weighting	Lin Lim	OK
Frequency Weighting	Random	OK
Level Range Control	4000 Hz	OK
Linearity Range	SPL 10dB 1000 Hz	OK
Linearity Range	SPL 1dB 4000 Hz	OK
Linearity Range	Leq	OK
Linearity Range	SEL	OK
RMS Detector	CF 3	OK
RMS Detector	CF 5	OK
RMS Detector	CF 10	OK
RMS Detector	Symmetry	OK
Time Weighting	Difference Indication	OK
Time Weighting	Single Burst FAST	OK
Time Weighting	Single Burst SLOW	OK
Time Weighting	Single Burst IMPULSE	OK
Time Weighting	Repetitive Burst	OK
Time Weighting	Peak	OK
Time Averaging	Leq-SEL	OK
Pulse Range	SEL-Leq	OK
Overload	SPL	OK
Overload	SEL	OK
Internal Reference		OK
Acoustic Response	A	OK
Acoustic Response	Lin	OK

### Calibration Equipment :

Brüel & Kjær's Sound Level Meter Calibration System B&K 9600 C2231_10, Ver.03.11.1995				
Description :	Make & Model :	Serial No. :	Last Cal. Date :	Traceable To
Digital Multi-meter	Datron 1281	27361	08 Oct 2003	HKSCS(HOKLAS)
Sine/Noise Generator	B&K 1049	1314978	Test	B&K Conformance
Test Waveform Generator	B&K 5918	1482949	Test	B&K Conformance
Acoustical Calibrator	B&K 4226	1551627	22 Jun, 2004	NPL via B&K (UKAS)

Calibrated By : *Rox Ng*  
Date : 10 September, 2004

Checked By : *July*  
Date : 10 September, 2004



## CERTIFICATE OF CALIBRATION

Certificate No. : 2KS040905-2

Page 1 of 2

### Calibration of :

Description	: Sound Level Meter	,	Microphone
Manufacture	: Brüel & Kjær		
Type No.	: 2231	,	4188
Serial No.	: 1709184	,	2179476

**Client :** Ove Arup & Partners Hong Kong Ltd.  
Level 5, Festival Walk,  
80 Tat Chee Avenue,  
Kowloon Tong, Kowloon,  
Hong Kong.

### Calibration Conditions :

Air Temperature	: 23.2 °C
Air Pressure	: 101.2 kPa
Relative Humidity	: 59 %

### Test Specifications :

The Sound Level Meter has been calibrated in accordance with the requirements as specified in IEC 60651 and IEC 60804 type 1, and vendor specific procedures.


The measurements has been performed with the assistance of :  
Brüel & Kjær's Sound Level Meter Calibration System B&K 9600 C2231\_10, Ver.03.11.1995  
The standard(s) and instrument(s) used in the calibration are traceable to international standard and are calibrated on a schedule which is adjusted to maintain the required accuracy level.


### Test Result :

A list of the performed (sub) tests is stated on page 2 of this certificate. Actual Measurement are documented on worksheet.

Date of Calibration: 10 September, 2004  
Calibrated By :

Certificate issued: 10 September, 2004  
Approved Signatory :

  
\_\_\_\_\_  
Fox Ng

  
\_\_\_\_\_  
Jacky Leung

Reproduction of the complete certificate is allowed. Parts of the certificate may only be reproduced after written permission.

## CERTIFICATE OF CALIBRATION

Certificate No. : 2KS040905-2

Page 2 of 2

### Results :

List of performed (sub) test with test status:

“OK” Means the result of the (sub)test is Inside the tolerances stated in the test specifications.

“ - ” Means the result of the (sub)test is Outside these tolerances.

Test :	Subtest :	Status :
Noise	A	OK
Noise	C	OK
Noise	Lin	OK
Noise	Lin Lim	OK
Frequency Weighting	A	OK
Frequency Weighting	C	OK
Frequency Weighting	Lin	OK
Frequency Weighting	Lin Lim	OK
Frequency Weighting	Random	OK
Level Range Control	4000 Hz	OK
Linearity Range	SPL 10dB 1000 Hz	OK
Linearity Range	SPL 1dB 4000 Hz	OK
Linearity Range	Leq	OK
Linearity Range	SEL	OK
RMS Detector	CF 3	OK
RMS Detector	CF 5	OK
RMS Detector	CF 10	OK
RMS Detector	Symmetry	OK
Time Weighting	Difference Indication	OK
Time Weighting	Single Burst FAST	OK
Time Weighting	Single Burst SLOW	OK
Time Weighting	Single Burst IMPULSE	OK
Time Weighting	Repetitive Burst	OK
Time Weighting	Peak	OK
Time Averaging	Leq-SEL	OK
Pulse Range	SEL-Leq	OK
Overload	SPL	OK
Overload	SEL	OK
Internal Reference		OK
Acoustic Response	A	OK
Acoustic Response	Lin	OK

### Calibration Equipment :

Brüel & Kjær's Sound Level Meter Calibration System B&K 9600 C2231_10, Ver.03.11.1995				
Description :	Make & Model :	Serial No. :	Last Cal. Date :	Traceable To
Digital Multi-meter	Datron 1281	27361	08 Oct 2003	HKSCS(HOKLAS)
Sine/Noise Generator	B&K 1049	1314978	Test	B&K Conformance
Test Waveform Generator	B&K 5918	1482949	Test	B&K Conformance
Acoustical Calibrator	B&K 4226	1551627	22 Jun, 2004	NPL via B&K (UKAS)

Calibrated By : *Rox Ng*  
Date : 10 September, 2004

Checked By : *[Signature]*  
Date : 10 September, 2004

APPENDIX J  

---

**Detailed noise  
monitoring results**





**Details of Noise Impact Monitoring**

Date	NSR No.	Time periods		Weather condition	Avg. wind speed (m/s)	Noise Level dB(A)			Influencing factors/ Site condition
		Start	Finish			L <sub>eq</sub>	L <sub>10</sub>	L <sub>90</sub>	
3-May-05	WN1	16:00	16:30	Fine	1.7	68.5	71.5	65.0	Normal Operation
3-May-05	WN2	16:40	17:10	Fine	1.5	68.2	71.5	66.0	Normal Operation
3-May-05	WN6	15:15	15:45	Fine	2.8	70.2	73.0	67.5	Normal Operation
3-May-05	WN7	14:30	15:00	Fine	2.3	69.5	72.5	66.5	Normal Operation
3-May-05	WN8	13:45	14:15	Fine	2.5	69.7	73.5	67.5	Normal Operation
3-May-05	WN9	9:45	10:15	Fine	1.4	72.4	75.5	68.0	Normal Operation
3-May-05	WN10	10:30	11:00	Fine	1.7	70.6	73.0	67.0	Normal Operation
3-May-05	WN11	11:15	11:45	Fine	1.8	69.1	72.5	66.0	Normal Operation
3-May-05	WN12	13:00	13:30	Fine	1.9	68.8	72.0	65.5	Normal Operation
3-May-05	WN13	13:40	14:10	Fine	1.8	66.5	70.0	59.0	Normal Operation
3-May-05	WN14	16:00	16:30	Fine	1.6	70.2	73.5	64.0	Normal Operation
3-May-05	WN15	9:23	9:53	Fine	1.9	66.0	68.5	61.0	Normal Operation
3-May-05	WN16	11:28	11:58	Fine	2.0	64.8	67.5	58.5	Normal Operation
12-May-05	WN1	13:00	13:30	Sunny	1.4	69.7	73.0	65.0	Normal Operation
12-May-05	WN2	11:30	12:00	Sunny	1.2	69.2	72.0	67.0	Normal Operation
12-May-05	WN6	14:25	14:55	Sunny	2.3	64.2	67.0	58.0	Normal Operation
12-May-05	WN7	13:45	14:15	Sunny	1.9	67.0	70.5	59.5	Normal Operation
12-May-05	WN8	13:00	13:30	Sunny	1.9	64.9	68.5	59.0	Normal Operation
12-May-05	WN9	10:30	11:00	Sunny	1.2	69.9	73.0	67.5	Normal Operation
12-May-05	WN10	15:25	15:55	Sunny	1.6	66.1	70.0	55.0	Normal Operation
12-May-05	WN11	9:55	10:25	Sunny	1.7	68.6	72.0	66.0	Normal Operation
12-May-05	WN12	9:15	9:45	Sunny	1.6	68.8	71.5	66.5	Normal Operation
12-May-05	WN13	10:40	11:10	Sunny	1.7	66.5	69.0	61.0	Normal Operation
12-May-05	WN14	9:10	9:40	Sunny	1.0	69.0	70.5	66.0	Normal Operation
12-May-05	WN15	9:50	10:20	Sunny	2.0	65.8	69.5	60.5	Normal Operation
12-May-05	WN16	11:25	11:55	Sunny	1.8	65.0	67.0	60.5	Normal Operation
18-May-05	WN1	15:00	15:30	Fine	1.5	68.6	70.0	66.0	Normal Operation
18-May-05	WN2	15:40	16:10	Fine	1.3	68.3	70.0	66.5	Normal Operation
18-May-05	WN6	13:00	13:30	Fine	1.9	68.5	70.5	66.0	Normal Operation
18-May-05	WN7	13:45	14:15	Fine	1.8	69.0	71.0	66.5	Normal Operation
18-May-05	WN8	9:30	10:00	Fine	1.6	69.4	71.0	67.0	Normal Operation
18-May-05	WN9	10:15	10:45	Fine	1.2	70.1	72.5	68.0	Normal Operation
18-May-05	WN10	11:00	11:30	Fine	1.6	73.9	76.0	71.0	Normal Operation
18-May-05	WN11	14:00	14:30	Fine	1.4	69.7	72.0	67.5	Normal Operation
18-May-05	WN12	13:00	13:30	Fine	1.4	66.1	69.0	59.0	Normal Operation
18-May-05	WN13	14:10	14:40	Fine	1.6	68.6	71.0	60.5	Normal Operation
18-May-05	WN14	9:20	9:50	Fine	1.4	68.5	71.0	63.5	Normal Operation
18-May-05	WN15	10:05	10:35	Fine	1.4	65.9	68.5	60.5	Normal Operation
18-May-05	WN16	11:20	11:50	Fine	1.3	65.5	68.0	62.0	Normal Operation
24-May-05	WN1	15:00	15:30	Cloudy	1.7	69.6	72.0	66.0	Normal Operation
24-May-05	WN2	15:35	16:05	Cloudy	1.8	70.5	73.0	68.0	Normal Operation
24-May-05	WN6	9:15	9:45	Cloudy	2.0	68.7	71.5	66.5	Normal Operation
24-May-05	WN7	9:55	10:25	Cloudy	1.9	69.0	72.0	66.5	Normal Operation
24-May-05	WN8	10:30	11:00	Cloudy	1.4	69.6	72.5	67.5	Normal Operation
24-May-05	WN9	11:15	11:45	Cloudy	1.3	70.6	73.5	68.0	Normal Operation
24-May-05	WN10	13:15	13:45	Cloudy	1.5	74.3	76.0	72.0	Normal Operation
24-May-05	WN11	14:00	14:30	Cloudy	1.7	69.3	72.0	68.0	Normal Operation
24-May-05	WN12	13:02	13:32	Cloudy	1.6	63.7	66.5	58.0	Normal Operation
24-May-05	WN13	14:05	14:35	Cloudy	1.7	66.7	70.0	60.5	Normal Operation
24-May-05	WN14	9:50	10:20	Cloudy	1.5	69.0	73.0	63.5	Normal Operation
24-May-05	WN15	9:05	9:35	Cloudy	1.5	66.1	68.5	60.5	Normal Operation
24-May-05	WN16	11:25	11:55	Cloudy	1.4	65.7	68.5	62.0	Normal Operation
30-May-05	WN1	14:40	15:10	Fine	1.8	68.7	71.5	67.0	Normal Operation
30-May-05	WN2	15:20	15:50	Fine	1.7	68.2	71.0	66.5	Normal Operation
30-May-05	WN6	9:15	9:45	Fine	1.9	69.8	73.0	68.0	Normal Operation
30-May-05	WN7	10:00	10:30	Fine	1.8	68.0	70.0	66.5	Normal Operation
30-May-05	WN8	10:35	11:05	Fine	1.8	70.3	72.5	68.5	Normal Operation
30-May-05	WN9	11:15	11:45	Fine	1.3	72.9	74.5	70.5	Normal Operation
30-May-05	WN10	13:00	13:30	Fine	1.5	70.6	73.5	68.5	Normal Operation
30-May-05	WN11	13:40	14:10	Fine	1.8	68.8	73.0	66.5	Normal Operation
30-May-05	WN12	13:30	14:00	Fine	1.6	66.7	69.5	60.5	Normal Operation
30-May-05	WN13	14:20	14:50	Fine	1.5	68.6	70.5	61.0	Normal Operation
30-May-05	WN14	9:10	9:40	Fine	1.4	69.6	73.5	60.5	Normal Operation
30-May-05	WN15	9:50	10:20	Fine	1.4	69.1	73.0	61.5	Normal Operation
30-May-05	WN16	10:35	11:05	Fine	1.2	73.7	74.5	70.5	Normal Operation

APPENDIX K

---

**Landscape and visual  
monitoring and audit  
report**



**Contract No. HY/99/18**  
**Castle Peak Road Improvements between**  
**Sham Tseng and Ka Loon Tsuen**

**Landscape & Visual Audit and Monitoring**

**Monthly Inspection Report No. 39**

**(May 2005)**

Prepared by


URBIS LIMITED

Prepared by :

  
Tran Tuan Huy

3<sup>rd</sup> June 2005

Approved by :

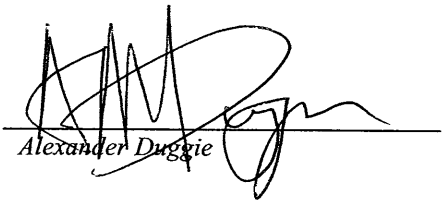  
Alexander Duggie

3<sup>rd</sup> June 2005

## **1.0 INTRODUCTION**

This is a Landscape and Visual Audit conducted to fulfill the requirements of the EIA during the Construction and Operational Phases of the project, and is based on the procedures and requirements as set out in the Castle Peak Road Improvements between Area 2 and Ka Loon Tsuen, Tsuen Wan - Environmental Monitoring and Audit Manual – West Contract.

Under the EIA, the proposed mitigation measures include both the planting works and treatment to structures. As stated in 6.4.2 of the EM & A, all measures undertaken by both the Contractor and the Landscape Contractor during the construction phase and the first 12 months of the operational phase shall be audited on a bi-weekly and bi-monthly basis respectively to ensure compliance with the intended aims of the mitigation measures.

## **2.0 SCOPE OF AUDIT**

The broad scope of the audit on mitigation measures is as detailed below:

### **2.1 Planting Proposals**

- Regular inspection of the agreed works areas to ensure no unnecessary intrusion by the Contractor outside the limit of the works;
- Regular review of the progress of engineering works to identify the earliest practical opportunity for the landscape works;
- Monitoring of tree transplanting and planting operations;
- Monitoring of works around the area of existing trees to be retained and protected;
- Monitoring of protection works for existing trees;
- Ensure planting works are carried out in accordance with the Specification and within the right planting season;
- Monitoring of the maintenance operations during the Establishment Period to ensure all plants are well watered and nutrients applied.

### **2.2 Standard Treatment to Structures**

- Monitoring and review to ensure the proposed architectural treatments to retaining walls, viaducts, bridges, and noise barriers are implemented in accordance with the approved design, and where appropriate, to soften the hard edges to structures with planting works.

### **3.0 INSPECTIONS**

#### **3.1 Summary of Inspection – 12<sup>th</sup> May 2005**

##### **3.1.1 Matters Arising from Previous Inspections**

- The Contractor had cleaned up the foul water at the temporary garbage collection area at Slope 6. The Contractor was reminded to carry out more regular clearance of the collection area in order to prevent nuisance and mosquito breeding.
- The Contractor had cleared away the scrap woodpile and scattered construction wastes at NM-02 area.
- The Contractor had cleared away the scrap woodpile at Slope 8 area.
- The Contractor had cleared away the construction waste pile at RW-01 area.
- The Contractor had cleared away the scattered litter and construction wastes previously found at the footbridge FB-02 area. However, new scattered litter was found and the Contractor was requested to clear it away and tidy up the area as soon as possible.
- No dry surface condition was observed during the inspection.

##### **3.1.2 Site Clearance and Formation Works**

- Construction waste piles were found at RW13 and Seawall 'C' areas. The Contractor was requested to clear it away as soon as possible.
- Empty cement bags was found scattered at the new village gateway - 'Pai Lau' - area next to footbridge FB-03. The Contractor was requested to clear it away as soon as possible.

##### **3.1.3 Tree Felling and Transplanting Works**

- No tree transplanting works was carried out during the inspection period.

##### **3.1.4 Recommendations**

- The Contractor was reminded to clear away all scattered litter, garbage, etc. as found on site, and keep the site in a tidy condition at all times.
- The Contractor was reminded to carry out more regular clearance of temporary garbage collection areas to prevent nuisance and mosquito breeding.

**Contract No. HY/99/18**  
**Castle Peak Road Improvements between Sham Tseng and Ka Loon Tsuen**  
**Landscape & Visual Audit and Monitoring**

---

**3.2 Summary of Inspection – 26<sup>th</sup> May 2005**

**3.2.1 Matters Arising from Previous Inspections**

- The Contractor had cleared away the construction waste piles at RW13 and Seawall 'C' areas.
- The Contractor had cleared away the scattered empty cement bags at the new 'Pai Lau' area next to footbridge FB-03.
- The Contractor had cleared away the scattered litter previously found at the area of footbridge FB-02. However, more scattered litter (mainly empty cans and bottles) was found and the Contractor was reminded to carry out more regular housekeeping to tidy up the area.
- No dry surface condition was observed during the inspection.

**3.2.2 Site Clearance and Formation Works**

- Construction waste piles, scrap woodpiles, and empty wooden crates were found at Portion 7 area. The Contractor was requested to clear it all away as soon as possible and to tidy up the work yard area.
- Construction waste piles were found at NM-02, FB-02, and Slope 8 areas. The Contractor was requested to clear it away as soon as possible.

**3.2.3 Tree Felling and Transplanting Works**

- No tree transplanting work was carried out during the inspection period.

**3.2.4 Recommendations**

- The Contractor was reminded to clear away all scattered litter, garbage, etc. as found on site, and keep the site in a tidy condition at all times.
- The Contractor was reminded to carry out more frequent watering of the site during dry periods to prevent dust nuisance.

**4.0 TREE TRANSPLANTING SURVIVAL RATE**

**4.1 Tree Transplanting Survival Rate**

The tree transplanting survival rate as reported by the Contractor for the period up to the end of May is 100%.

**5.0 AUDIT SCHEULE**

**5.1 Audit Schedule for June 2005**

The next audits are schedule to be conducted on 9<sup>th</sup> and 23<sup>rd</sup> June 2005.

APPENDIX L

---

**Detail of the complaint**





# MAEDA CORPORATION

## Enquiry / Complaint Follow Up Form

Contract: HY/99/18 - Castle Peak Road between Sham Tseng and Ka Loon Tsuen, Tsuen Wan

### Call Details

Log No	193	Type	Complaint	<input checked="" type="checkbox"/> Environmental Complaint
Received by	C.F. Kwong	Date	04-May-2005	Time 12:00 PM

### Call Details

Name	Unknown	Organisation	Private	Organization
Tel		Fax		E-mail
Address	Unknown			

### Details of Enquiry / Complaint

Location Sea Crest Villa, Phases II and III

#### Description

This is a complaint recorded by the Highways Department (ICC Case Ref. 1-55989162 dated 3 May 2005) and forwarded to the Contractor's complaint handling system through the RE's office.

This complaint refers to the daytime noise generated from the use of power mechanical equipments (PMEs) during the hours between 8:00 a.m. and 12:00 Noon. The complainant suggested that the noisy construction work be scheduled more evenly throughout the day, preferably to the afternoon period.

### Details of Action Taken

Report to RE	Mable Leung	Date	04-May-2005	Report Time	12:00 PM	Report By
Action by	C.F. Kwong	Date	04-May-2005	Action Time	12:00 PM	C.F. Kwong

#### Details

Noted that the complaint refer to daytime construction noise generated from activities well within the guidelines of various standards.

Since no contact information was given of the complainant, no follow-up call was possible to explain the works to the complainant.

We will endeavor to improve our work-process scheduling where practicable.

Follow up by	Construction Team	Follow up date	4 May 05	Follow up time	
--------------	-------------------	----------------	----------	----------------	--


#### Follow up

Look for opportunities to disperse noisy works more evenly throughout the day and make appropriate improvements to works scheduling for the concerned works, where practicable.

#### Remarks

This is a complaint recorded by the Highways Department (ICC Case Ref. 1-55989162 dated 3 May 2005) and forwarded to the Contractor's complaint handling system through the RE's office.





**M A E D A**

Our ref.: HY/99/18/M45/100/20/23133

Your ref.:

Date: 20 May 2005

Environmental Protection Department  
Local Office(Urban West & Island)  
8/F, Tsuen Wan Government Offices,  
38 Sai Lau Kok Road,  
Tsuen Wan,  
Hong Kong

Attn: Mr. Chung

Dear Sir,

**Castle Peak Road Improvement  
Between Sham Tseng & Ka Loon Tsuen, Tsuen Wan  
Response to Public Complaint of 8 May 2005 at Sea Crest Villa Phase IV**

We refer to your site visit of 12 May 2005, in response to a public complaint regarding the occurrence of silty water at the seashore in front of Sea Crest Villa Phase IV on the Sunday of 8 May 2005. After investigation, we have the following findings:

1. The concerned day was a Sunday (an off-day) and there was no construction works being conducted on site;
2. Site tidying work and safety patrol were conducted, but not at the concerned location;
3. Records from the H.K. Observatory show that the day was a rainy day;
4. Site staff living in the area confirmed that there was heavy rain in the morning of the concerned Sunday.
5. During the site inspection of 12 May 2005, there was no evidence of silty suspensions in the sea, but it was suspected that the heavy rain might have caused the erosion of some slopes near the seaside of the retaining wall.

Therefore, we believe that adverse weather was the cause of this isolated event. Nevertheless, in order to prevent a reoccurrence, we have covered the slope highlighted during the site inspection (see attached photograph). Further site inspections have been and will continue to be conducted to further understand the situation.

Page 1 of 3




ISO 9001:2000  
Cert. No. 0281-2000-AQ-RGC-HKAS

Maeda Corporation Rooms 1601-1605 New East Ocean Centre  
9 Science Museum Road, T.S.T., East, Kowloon, Hong Kong.  
Telephone: 2369 9267 Facsimile: 2724 4046

Site Office - 21 Castle Peak Road Tsing Lung Tau  
Telephone: 2491 7100 Facsimile: 2491 9678  
E-mail address: hy9918@maeda.com.hk



ISO 14001:1996  
Cert. No. EMSC-1292



MAEDA

Our ref.: HY/99/18/M45/100/20/23133

If you have any queries, please contact our Mr. Kwong Chi Fung at 2491-3880.

Yours faithfully,

Derek Elliott  
Site Agent  
For and on behalf of  
Maeda Corporation

DJE/CFK/mc

Page 2 of 3



ISO 9001:2000  
Cert. No. 0281-2000-AQ-RGC-HKCS


Maeda Corporation Rooms 1601-1605 New East Ocean Centre,  
9 Science Museum Road, T.S.T., East, Kowloon, Hong Kong.  
Telephone: 2369 9267 Facsimile: 2724 4046

Site Office - 21 Castle Peak Road Tsing Lung Tau  
Telephone: 2491 7100 Facsimile: 2491 9678  
E-mail address: hy9918@maeda.com.hk




ISO 14001:1996  
Cert. No. EMSC-1292

Our ref: HY/99/18/M45/100/20/23133

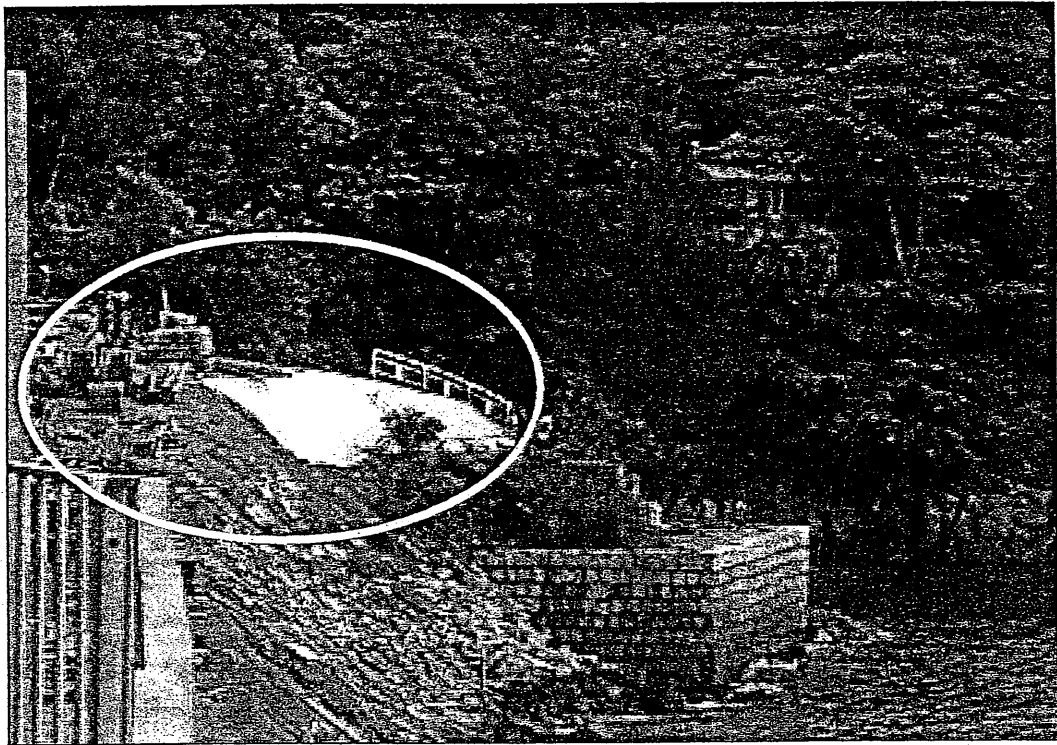

**The exposed slope above the fishing platform has been covered to prevent erosion.**

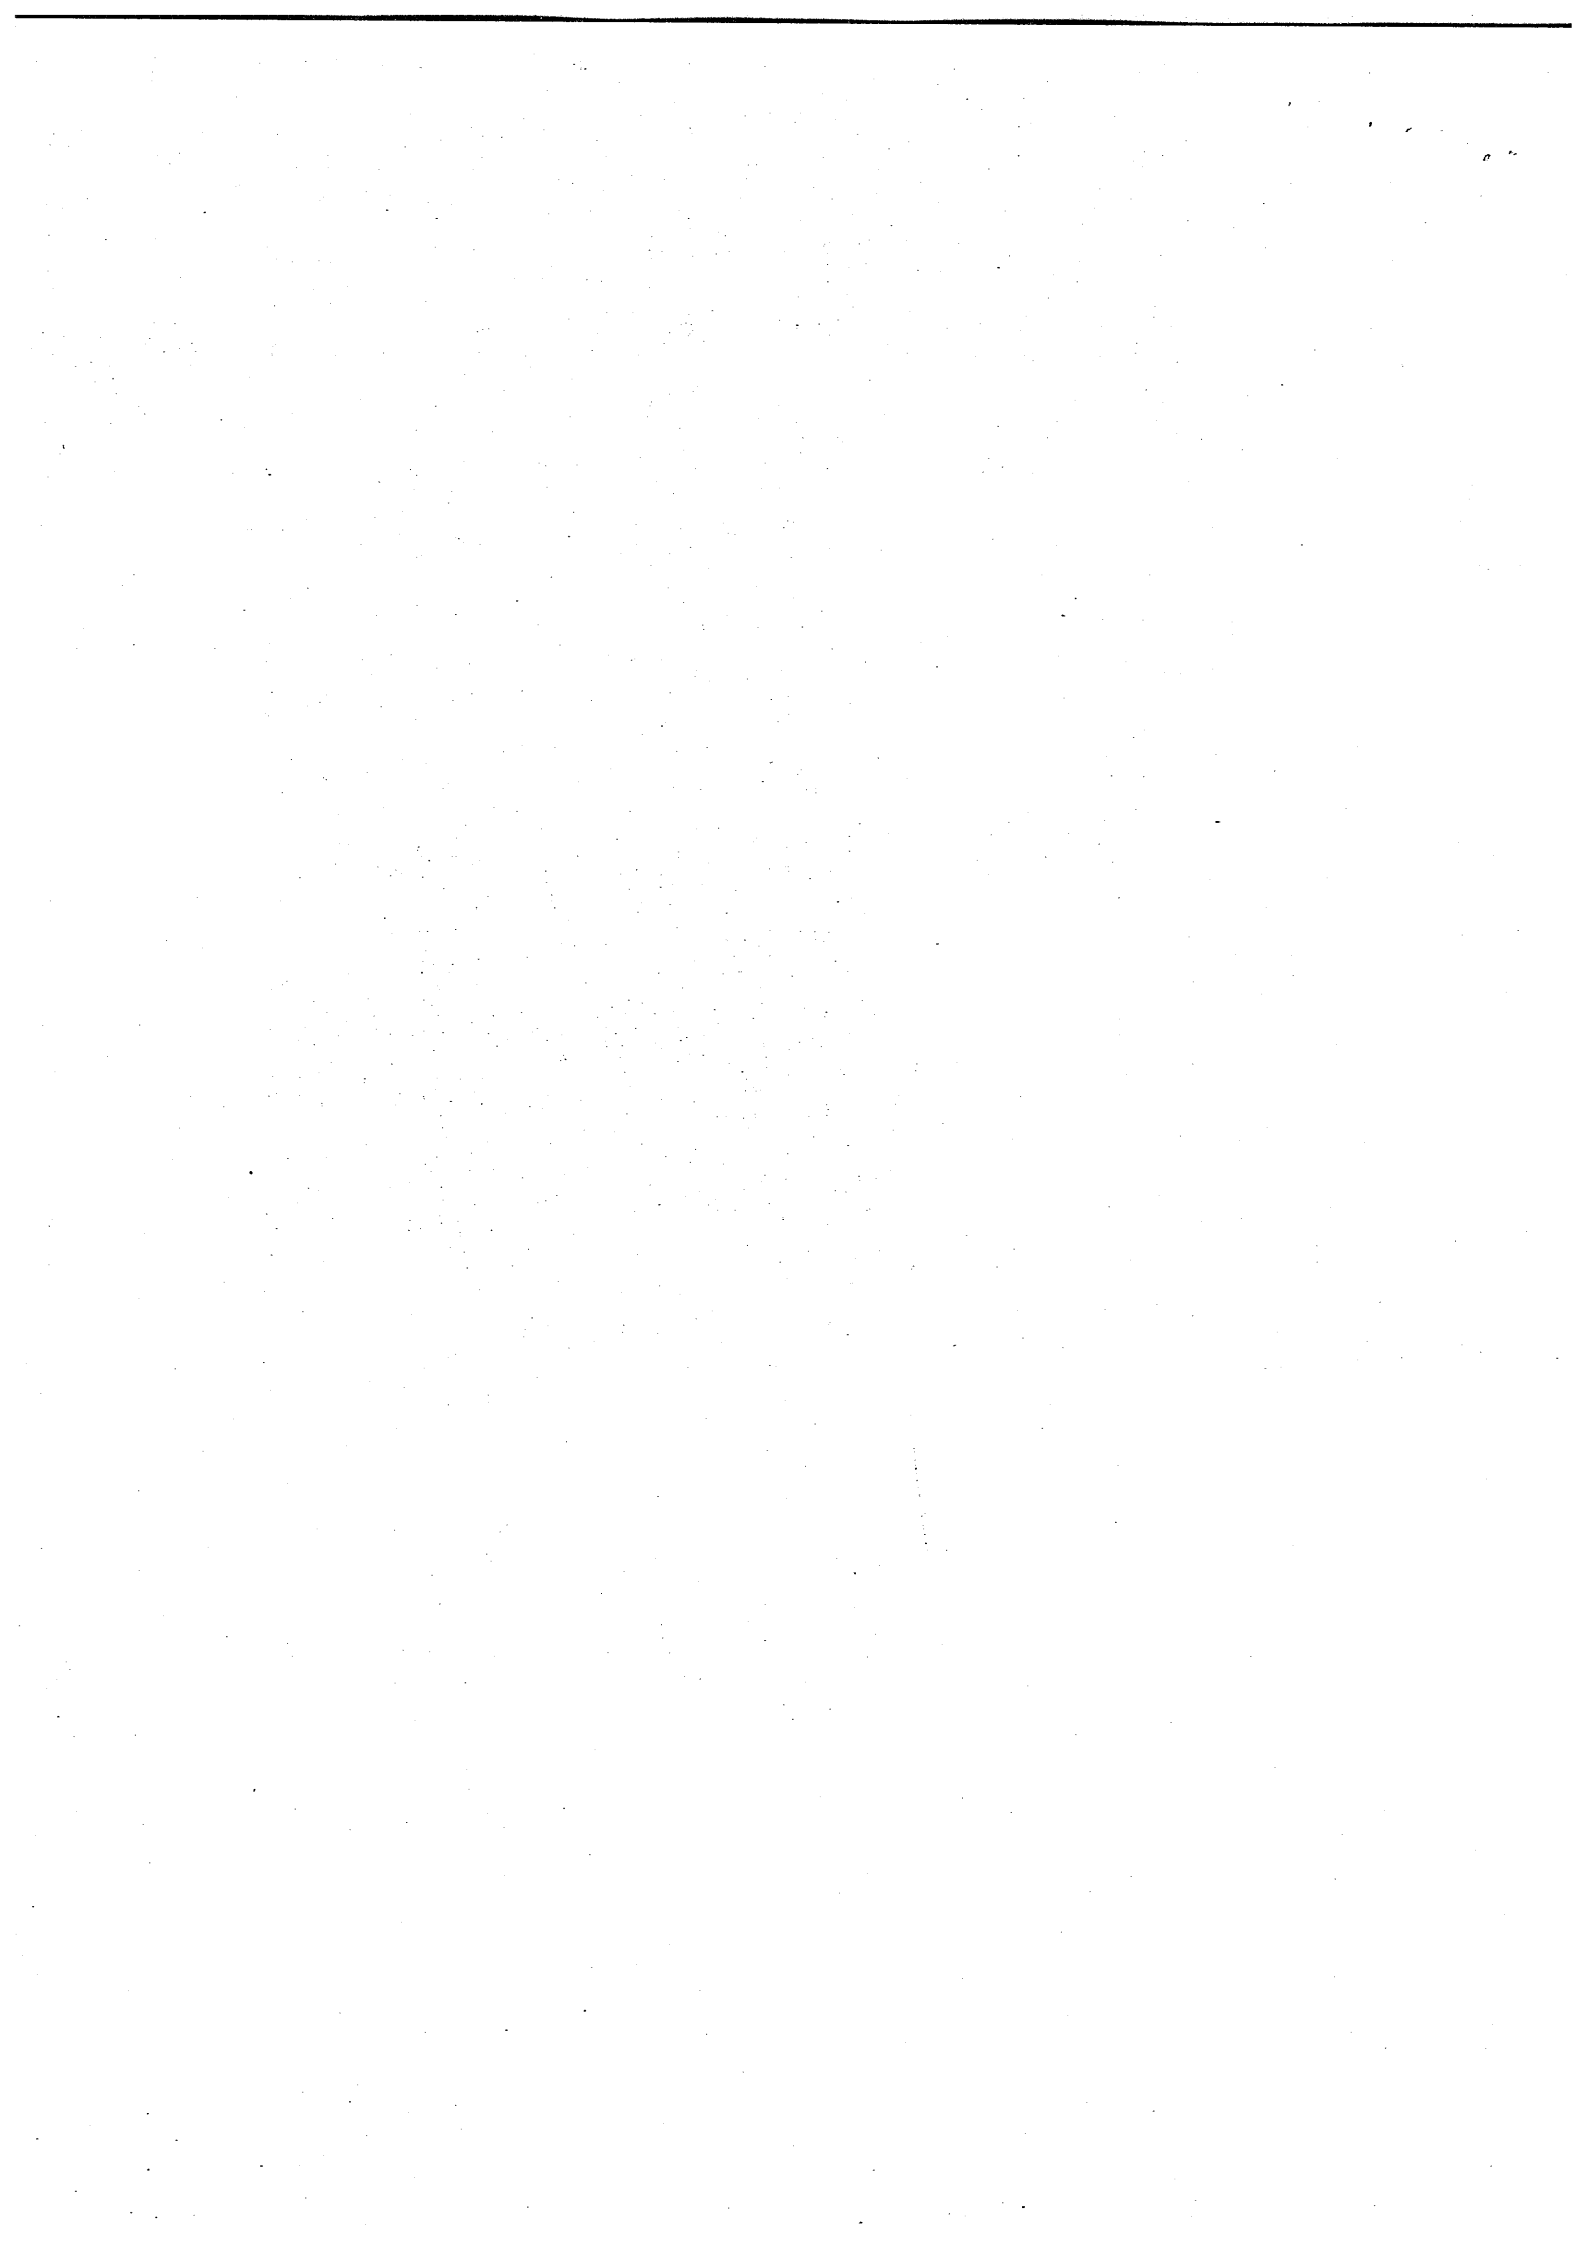

APPENDIX M

---

**Log record on  
environmental  
complaints**





## Log Record on Environmental Complaints

No.	Date of Complaint Received	Description	Proposed Actions	Completion Date	Remarks
029	12-Aug-02	Complaint from Mr. Au regarding muddy water washing out from Kowloon Bound Lane from the construction site	Enlarge concrete paving at site entrance; further improvement to the existing temporary drainage system to minimise wash-off of waste water to the adjacent road; and make sure temporary water supply points are properly turned off during lunch break or other times when they are not in use.	16-Aug-02	
036	31-Aug-02	Complaint from Mrs. Chung regarding the generation of fugitive dust from the construction site in front of Tsing Lung Tau Village	Frequent watering of the related works area with the aid of water browser	31-Aug-02	
054	7-Dec-02	Complaint from Mr. Lo regarding the stagnant water ponding in front of the construction site at Sham Tseng	Explained to the complainant that the water ponding was a wheel washing bay	7-Dec-02	
067	3-Mar-03	Complaint from Hong Kong Garden Management Office regarding the noise from vehicular movement over the temporary road cover at Castle Peak Road provided by the Contractor	The Contractor has added extra welding to improve the rigidity of the temporary steel deck. The work was completed during the off-peak hours in the period between 12-Mar-03 to 17-Mar-03.	17-Mar-03	The Contractor has taken noise readings and found that the noise level was within the baseline levels.
068	11-Mar-03	Complaint from Mr. Leung at Hong Kong Garden regarding the noise from evening road traffic, travelling over the steel decking plate on the adjacent temporary road diversion.	The Contractor has added extra welding to improve the rigidity of the temporary steel deck. The work was completed during the off-peak hours in the period between 12-Mar-03 to 17-Mar-03.	17-Mar-03	The Contractor has taken noise readings and found that the noise level was within the baseline levels.
070	6-Mar-03	Complaint from EPD regarding the reclamation works at Seawall B opposite to Hong Kong Garden on Sunday	The Contractor has previously informed the subcontractor of the statutory requirements as noise, dust emission, water discharge, and waste management. The Contractor agreed to keep vigilant in monitoring and surveillance of the site and continue to remind the subcontractors of the statutory requirements.	10-Mar-03	The Contractor has formally closed all site area for the Chinese New Year. Entrances of all site area were barricaded before the Contractor's staff vacated the sites on 30 January 2003.
070	6-Mar-03	Complaint from EPD regarding dust emission from the reclamation works at Seawall B opposite to Hong Kong Garden.	The Contractor has previously informed the subcontractor of the statutory requirements as noise, dust emission, water discharge, and waste management. The Contractor agreed to keep vigilant in monitoring and surveillance of the site and continue to remind the subcontractors of the statutory requirements.	10-Mar-03	The Contractor has investigated and confirmed that the marine works towards the eastern end of Seawall B was wet and the concreting works at the west end of the Seawall B were not dusty and no dust was emitted. Ground surface was also covered with crushed rock. The Contractor was also further reminded to spray water before and during unloading and moving of rock boulders and onto the haul road.
070	24-Mar-03	Complaint from EPD regarding daytime construction noise at Seawall B opposite to Hong Kong Garden.	The Contractor agreed to continuously monitor and review the operation in the vicinity opposite to Lung Tang Court, in order to minimize the noise impact caused to the public. In addition the Contractor will respond to the complaints received on the 24-hours Contract Complaint Hotline 2496 2555 in the first instant.	31-Mar-03	No exceedance was recorded at the noise monitoring station WN6, WN7 and WN8 from January 2003 to March 2003. It was suspected that the noise was due to traffic noise together with operational noise of plant equipment at Seawall B. The Contractor was also reminded if reorganization of working arrangement is necessary, mitigation proposal should be submitted to IC(E) for review. Additional noise monitoring shall also be conducted at the noise monitoring station WN8 once the mitigation proposal is implemented.

## Log Record on Environmental Complaints

No.	Date of Complaint Received	Description	Proposed Actions	Completion Date	Remarks
076	15-Apr-03	Complaint from Mr. Wong of TL 60 Management Limited regarding the noise nuisance generated from the vehicle movement over the temporary steel decking in front of Hong Kong Garden at Castle Peak Road provided by the Contractor.	The Contractor has replaced the isolated decking plate by 17 April 2003 and agreed to frequently inspect the condition of the steel decking. Further improvement works were completed on 25 April 2003.	25-Apr-03	
078	15-Apr-03	Complaint from Mr. Chau of Hong Kong Garden regarding the noise nuisance generated from vehicle movement over the temporary steel plate in front of the premises.	The Contractor has explained to Mr. Chau that the improvement works were completed on 25 April 2003 and agreed to carry out daily inspection to check the condition of the steel plate.	29-Apr-03	The complainant agreed that the noise nuisance has abated.
080	5-May-03	Complaint from Mr. Tsao / Mr. Chan of Mui Yuen, opposite to Bayside Villas regarding water leakage from the rocky slope behind his house and the damage of water pipes by cleaning works.	The water pipe was repaired on 9 May 2003. The Contractor has explained that the rocky slope was outside the site boundary.	9-May-03	
082	7-May-03	Complaint from Ms. Chan regarding water ponding on existing footpath along Castle Peak Road near the Contractor's site office.	The Contractor has formed holes at existing upstand wall to drain off water trapped in the adjacent footpath and to patch up local depression at the affected footway with plain concrete.	19-May-03	
084	21-May-03	Complaint from Ms. Lam of Sea Crest Villa Phase I regarding construction noise from the slope works outside Sea Crest Villa Phase I.	The Contractor has observed low-noise emission construction equipment were being used at the time of inspection and proposed to speed up the works to limit the duration of daytime construction noise impact.  The Contractor has provided additional information in their letter ref. HY/99/18/M45/300/40/10229 dated 25 June 2003. Additional noise monitoring had been taken by the Contractor on 22 May 2003 at WN15 obtaining the result of 66.6dB(A), which was below the limit level of 75dB(A). After reviewing the findings and investigation details, the Contractor confirmed that no further remedial actions was required.	25-Jun-03	The Contractor was requested to submit mitigation proposal to IC(E) for review and to implement the mitigation proposal. Additional noise monitoring is required to be conducted at the noise monitoring station WN15 once the mitigation proposal is implemented.  The IC(E) had no comment on the Contractor's findings. Since no mitigation measures were implemented, additional noise monitoring was not conducted.
086	23-May-03	Complaint from Mr. So regarding stagnant water in the drainage and wheel washing bay near the entrance of Sea Crest Villa Phase IV and the damage of road surface near L1 main gate and CLP electricity supply room.	Explained to the complainant that the stagnant water inside the wheel washing bay was for cleaning of vehicle. The leakage found the temporary water pipe was repaired. The water and silt trapped in the U-channel near the main entrance of the estate was removed and the kerb on west side of the run-in to Gate L1 was reinstated.	29-May-03	The Contractor will properly maintain the wheel washing facility, regularly inspect and clean the drainage channel and the gully pots near the main entrance of the estate. The damaged paving slab and cable pit near the power supply room will be restored to original condition after completion of the adjacent substructure works around mid August 2003.
088	3-Jun-03	Complaint from EPD regarding construction dust from Seawall B.	The Contractor proposed to place the concerned area under higher priority and endeavor to water the concerned haul road more frequently during dry days.	6-Jun-03	No rock breaking activity has been observed in site audits since 5 June 2003. The haul road at Seawall B was observed wetted in the site audits. The Contractor was reminded to provide water spraying if there is rock breaking activity in this vicinity.

## Log Record on Environmental Complaints

No.	Date of Complaint Received	Description	Proposed Actions	Completion Date	Remarks
088	3-Jun-03	Complaint from EPD regarding construction noise from Seawall B.	The Contractor reported that there may be occasional crashing noise for the piling works when rock level is reached. The Contractor has been providing mitigation measures, such as barrier and restriction of the rate of concerned works. The Contractor will also endeavor to expedite the works to reduce the duration of perceived daytime impact. The Contractor proposed to perform additional ad hoc inspections on Mondays, Wednesday and Fridays at the concerned area to confirm continual implementation of measures and to conduct additional noise monitoring where appropriate.	6-Jun-03	No rock breaking activity has been observed in site audits since 5 June 2003. Contractor has been reminded to submit mitigation proposal to IC(E) for review and to implement the mitigation proposal if provision of additional mitigation measures is required. The Contractor was also advised to provide portable noise barrier if there is rock breaking activity. Additional noise monitoring is also required to be conducted at the noise monitoring station WN8 once the mitigation proposal is implemented. The IC(E) had no comment on the Contractor's findings. Since no mitigation measures were implemented, additional noise monitoring was not conducted.
091	16-Jun-03	Complaint from Ms. Chan of Sea Crest Villa Phase 1 regarding noise from drilling works carried out at BPRW70 outside Sea Crest Villa Phase 1 before 07:00.	Upon investigation, the Contractor confirmed that there has been no construction work being conducted before 07:00. Nevertheless, the Contractor has scheduled the concerned work to be commenced at 08:00 as on 17 July 2003.	17-Jun-03	
092	16-Jun-03	Complaint from Mrs. Chung of Lido Garden regarding noise from drilling works carried out at BPRW70 opposite to Lido Garden before 07:00.	Upon investigation, the Contractor confirmed that there has been no construction work being conducted before 07:00. Nevertheless, the Contractor has scheduled the concerned work to be commenced at 08:00 as on 17 July 2003.	17-Jun-03	
097	27-Jun-03	Complaint from Mr Fok of Kai Shing Management Services regarding noise nuisance and the ponding of stagnant water arising from the construction activities outside Sea Crest Villa Phase III.	Upon investigation, the condition of water pumps installed separately at east end of the slope close to SCV Phase III and Pai Min Kok Stream Course has been checked. Noise generated from the ongoing construction works in these areas has been monitored. The rock breaking with jackhammer at PMK had been completed on 26 June 2003.	4-Jul-03	After further enquiry into the nature of the complaint, it appears that the complaint refers to the extended duration of construction works in the concerned area (i.e. inconvenience caused due to lengthy works program). The Contractor's Mr Peter Ip has explained the nature of the works to the Management Office. There have been no further complaints from SCV Phase III since the briefing.
103	31-Jul-03	Complaint from Hong Kong Management Office regarding the noise generated by vehicles running over the steel decking plate on the Castle Peak Road close to Hong Kong Garden.	The existing steel decking plate had been repaired during off peak hours and regular inspection on the condition of steel plate and adjacent road surface was agreed to be conducted.	5-Aug-03	There had been no further complaints after the repair.
105	13-Aug-03	Complaint from Mr Chow of Sham Tseng regarding fell of all old trees along section of Castle Peak Road near Ma Wan Pier.	After investigation on the matter, it had been confirmed that the felling and the transplanting of group of trees along the Castle Peak Road near Ma Wan Pier had been carried out in compliance with approved plans and schedules. No follow up is required.	16-Aug-03	
108	11-Sep-03	Complaint from Mr Edith Lee of Sea Crest Villa Phase I complained that it was very dusty at her house and she found that there was no water spraying at the construction site of the slope near Ma Wan Pier.	After investigation on the matter, water browser was arranged for spraying through the haul road. Rock breaking location would be sprayed directly connected from water supply point. To follow up the case, water browser would be arranged every 2 to 3 hours depends on drying up condition. A worker would be arranged for spraying water through out the rock breaking process.	11-Sep-03	

## Log Record on Environmental Complaints

No.	Date of Complaint Received	Description	Proposed Actions	Completion Date	Remarks
112	10-Oct-03	Complaint from Mr Cheung of FEHD that regarding the general refuse being accumulating on the pedestrian walkway between Sea Crest Villa Phase III and Phase II and the drainage channel at Pai Min Kok Village.	Investigation was conducted immediately on 11 October 2003. It was observed that the pedestrian walkway and Outfall I had been tidied up except at the corner of Sea Crest Villa Phase III where a broken umbrella and some broken traffic light was lying on the ground. Immediate action was taken to remove the broken umbrella and signal lights. The site area would be maintained regularly. It was noted that wooden formwork and construction materials might possibly been mistaken to be rubbish.	13-Oct-03	
114	25-Nov-03	Complaint log no. 114 was received on 25 November 2003 regarding the muddy water found on the beach opposite to Sea Crest Villa Phase III.	An inspection for the concerned site area at the interface between the beach and the construction site revealed that there was no evidence of active construction works adjacent to the beach or the presence of muddy water. There was also no evidence of muddy water discharge from Outfall I. The work programme for the following days leading up to the complaint was inspection and found that the bored piling activity had been completed and removed since 15 November 2003. The contractor would regularly monitor the area for muddy water. If potential discharge sources were identified, the Contractor would take action to rectify the situation.	26-Nov-03	
115	30-Nov-03	Complaint from Miss Chan of Sham Tseng Latrine was received on 30 November 2003 regarding the pond of foul water at the footway in front of Sham Tseng Latrine.	An inspection for the concerned site area was carried out. The water ponding was confirmed to be overflow from the terminal manhole, which was a part of public latrine system. The maintenance of the public latrine and the associated systems were the responsibility of FEHD. The Contractor had contacted FEHD to follow up the issue.	1-Dec-03	
116	6-Dec-03	Complaint from Mr Paul Wong of Hong Kong Garden Management Office was received on 6 December 2003 regarding construction noise during early hours of 8:00am.	Inspection of concern area and no abnormal construction activities was found. The Contractor had explained to the Complainer that no statutory permit was required for construction work other than percussive piling at 8:00am and the nature of works conducted at the area was well within permitted limits. ET was reminded the Contractor to implement noise mitigation proposal in accordance with EM&A Manual.	8-Dec-03	Noise generated from the ongoing construction works in these areas was monitored and no exceedance was found. As the Contractor had responded to the complainant and no further complaint was recorded, the Contractor proposed that no further remedial/preventative measures were necessary.
123	20-Feb-04	Complaint from Mr Ho of TL60 Management Ltd was received on 20 February 2004 regarding noise arising from the temporary steel plates on road pavement near Blocks 1 & 2 of Hong Kong Garden	Condition of the decking plat was checked on 23 February 2004 and was repaired on 24 February 2004 during off peak hours.	24-Feb-04	Regular inspection will be conducted and adjacent works will be expedited to allow early road diversion for permanent removal of the steel plates.
139	9-Jul-04	Complaint from EPD was received on 9 July 2004 regarding noise arising from prescribed construction works or works using power mechanical equipment at night near Seawall-B area opposite to Hong Kong Garden	After investigation on the matter, there was no evidence of carrying out the prescribed construction works or using power mechanical equipment between 1900 and 2300 on 3 July 2004.	23-Jul-04	
140	10-Jul-04	Complaint from Highway Department was received on 10 July 2004 regarding noise arising from rock breaking near Sea Crest Villa Phase 3	After investigation on the matter, there was no evidence of rock breaking activities undertaken in the vicinity of Sea Crest Villa Phase 3.	23-Jul-04	

## Log Record on Environmental Complaints

No.	Date of Complaint Received	Description	Proposed Actions	Completion Date	Remarks
149	11-Aug-04	Complaint from EPD regarding the sandy wake of a marine vessel carrying sand to the beach reinstatement area of Seawall B	After investigation on the matter, the following action was proposed. The vessel and water depth should be thoroughly checked prior to sand placing. If shallow water need to be approached, another shallower vessel should be used. The land co-ordinator should cease the sand placing operation if muddy plumes were noticeable.	31-Aug-04	
154	25-Aug-04	Complaint from Ms Tang regarding littering on the slope close to the Sea Crest Villa Phase 2.	After investigation on the matter, there was no evidence that the problem was caused by any construction activities.	27-Aug-04	
156	18-Sep-04	Complaint from Mr Chu regarding excessive garbage trapped along the adjacent shore of Seawall B west end.	It was out of control over the accumulation of floating rubbish drifting toward the shore. However, the contractor would remove them as soon as possible.	20-Sep-04	
166	4-Nov-04	Complaint from Mr Wong regarding the accumulation of foul ground and sewage waters in the trench in front of the strip of restaurants at Sham Tseng.	Contractor placed a sludge separation plant to treat the accumulated water prior to discharge and pumped away the accumulated water as regularly as possible. An CNP has been attained for the pumping of concerned areas.	11-Nov-04	
172	5-Jan-05	Complaint from Mr Raymond Chan regarding the daytime construction noise started 7:30am over the past few days.	Contractor clarified with Mr Chan that construction work at 7:30am was within regulation guidelines. However, the contractor still agreed to arrange noisy activities be carried out after 8:00am.	5-Jan-05	
175	28-Jan-05	Complaint from Mr Kan regarding the rubbish discarded at the finished RERW slopes and Outfalls opposite to Sea Crest Villa Phase II and III.	Contractor inspected the concerned area, taken photographs and carry out maintenance works as requested.	31-Jan-05	
193	4-May-05	Complaint received from Highways Department regarding the daytime noise generated from the use of power mechanical equipment during the hours between 8am to 12am near Sea Crest Villa Phase II and III.	Contractor responded to the complainant that daytime construction noise generated from activities was well within the guidelines of prevailing standards and promise to look for opportunities to disperse noisy works more evenly throughout the day and make appropriate improvements to works scheduling for the concerned works wherever practicable.	4-May-05	

APPENDIX N

---


**Copy of new CNP**





本署檔號 (5) in EP731/N02/RW0331-05  
Out Ref.:  
來函檔號  
Your Ref.:  
電話 2417 6085  
Tel. No.:  
圖文傳真 2411 3073  
Fax No.:  
電子郵件  
E-Mail:  
網址  
Homepage: <http://www.epd.gov.hk/>

Environmental Protection Department  
Environmental Compliance Division  
Regional Office (West)  
8/F., Tsuen Wan Government Offices,  
38 Sai Lau Kok Road,  
Tsuen Wan, N.T.



環境保護署  
環保法規管理科  
區域辦事處(西)  
新界荃灣  
西樓角路38號  
荃灣政府合署八樓

Registered Post

25 May 2005

To: Maeda Corporation H.K. Office  
Room 1601-05, 16/F.,  
New East Ocean Centre,  
9 Science Museum Road,  
Tsim Sha Tsui, Kowloon

Dear Sir,

**Notice of Issue of Construction Noise Permit pursuant  
to section 8(6) of the Noise Control Ordinance (Cap. 400)**

I write to inform you that, under section 8(6) of the Noise Control Ordinance, the Authority has decided to issue a construction noise permit in respect of your application, which was received by the Authority on 11 May 2005, for the use of powered mechanical equipment for carrying out construction work at Castle Peak Road between Sham Tseng & Ka Loon Tsuen, N.T.

The construction noise permit No. **GW-RW0331-05** is enclosed.

You are advised to read the conditions of permit carefully and to ensure compliance with these conditions. Any breaching of the conditions may lead to cancellation of the permit, subsequent prosecution action and the Authority's refusal to issue further permit for the above construction site.

Should you have any queries regarding this Permit, please contact Mr. H. B. LEUNG at 2417 6123.

  
(LEUNG Cho-shing)  
for Authority

掛號函件

致：前田建設工業株式會社  
九龍尖沙咀科學館道9號  
新東海中心16樓1601-05室

執事先生：

根據《噪音管制條例(第400章)》第8(6)條  
發出的通知書 — 簽發「建築噪音許可證」

本監督在二零零五年五月十一日接獲你擬於下述地址：新界青山公路介乎深井與嘉龍村之間，使用機動設備進行建築工程而提出的「建築噪音許可證」申請，現根據《噪音管制條例》第8(6)條的規定通知你，上述的申請已被批准。

隨函附上「第GW-RW0331-05號建築噪音許可證」。

請細閱並確保遵守現時這張許可證內載有關條件。如發現有違反許可證條件的建築工程，本監督可撤銷許可證、提出檢控、及拒絕為上述地盤再簽發出「建築噪音許可證」。

如對此許可證有任何查詢，請致電 2417 6123 與我們的 梁慶彪 先生聯絡。

監 督

(梁祖成 代行)

二零零五年五月二十五日

FORM 3  
NOISE CONTROL ORDINANCE  
(Chapter 400)  
SECTION 8(9)

[reg.5(a)]

**CONSTRUCTION NOISE PERMIT FOR THE USE OF POWERED  
MECHANICAL EQUIPMENT FOR THE PURPOSE OF CARRYING OUT  
CONSTRUCTION WORK OTHER THAN PERCUSSIVE PILING AND/OR  
THE CARRYING OUT OF PRESCRIBED CONSTRUCTION WORK**

CONSTRUCTION NOISE PERMIT NO. GW-RW0331-05

To: Maeda Corporation H.K. Office

This construction noise permit is issued in accordance with section 8 of the Noise Control Ordinance. Permission is granted for the use of powered mechanical equipment for the purpose of carrying out construction work other than percussive piling and/or the carrying out of prescribed construction work, subject to the conditions set out below. The carrying out of construction work otherwise than in accordance with the conditions may result in the permit being cancelled and in a prosecution for an offence.

*CONDITIONS*

1. Construction site where the powered mechanical equipment and/or prescribed construction work may be employed :

Full address: Castle Peak Road between Sham Tseng & Ka Loon Tsuen, N.T.

Lot No. -----

The site boundary, that is, the boundary of the area within which the powered mechanical equipment may be used and the prescribed construction work may be carried out is delineated on the attached plan which forms part of this construction noise permit.

2. \*PART/WHOLE of the site falls \*WITHIN/OUTSIDE a designated area.

3. Powered Mechanical Equipment

a. Items of powered mechanical equipment which may be used inside the site boundary :

<i>Identification code of item of powered mechanical equipment (if applicable)</i>	<i>Description of item of powered mechanical equipment</i>	<i>No. of units</i>
Group A : CNP 048	Crane, mobile (diesel)	Two
Group B : ---	Lorry, with crane, gross vehicle weight $\leq$ 38 tonnes	One
Group C : CNP 222	Tractor	Four

- b. Validity of the construction noise permit for the use of the powered mechanical equipment:

Date and time of commencement : 4 June 2005 at 2300 hours

Days and hours : Any Three 7-hour period: 0000-0600 hours and 2300-2400 hours.

This part of the permit expires on : 10 July 2005 at 0600 hours

- c. One photograph, endorsed by the Authority, of each item of powered mechanical equipment described in this construction noise permit is required to be kept on the construction site and made available for inspection by the Authority.

- d. Other conditions imposed on the use of the powered mechanical equipment:

Refer to attached sheet



4. Prescribed Construction Work

a. Type of prescribed construction work which may be carried out inside the site boundary:

Identification code of type of prescribed construction work	Description of type of prescribed construction work
	Nil

b. Validity of the construction noise permit for the carrying out of the prescribed construction work:

Date and time of commencement: Not applicable at \_\_\_\_\_

Days and hours: Not applicable

This part of the permit expires on: Not applicable at \_\_\_\_\_

c. Site layout plan(s), endorsed by the Authority, may be attached with the permit to indicate the locations permitted for the carrying out of prescribed construction work described in this permit. The layout plan(s) is(are) required to be kept on the construction site and made available for inspection by the Authority.

d. Other conditions imposed on the carrying out of the prescribed construction work:

Not applicable

---



---



---

5. This construction noise permit or a copy thereof must be displayed on the construction site at a proper location within the boundary of the working area for public information at all times when the powered mechanical equipment covered by this permit are being used for carrying out construction work.

Dated this 25th Day of May 2005



Signed: \_\_\_\_\_

(LEUNG Cho-shing)

for Authority

\* Delete as necessary

表格 3  
噪音管制條例  
(第 400 章)  
第 8(9) 條

[第 5(a) 條]

建築噪音許可證  
為進行建築工程 (撞擊式打樁除外)  
而使用機動設備及 / 或進行訂明建築工程

建築噪音許可證編號: GW-RW0331-05

致: 前田建設工業株式會社

本建築噪音許可證是按照《噪音管制條例》第 8 條的規定而發出的。現准予使用機動設備以進行撞擊式打樁工程以外的建築工程及 / 或進行訂明建築工程，但須受以下條件規限。若不按照該等條件進行建築工程，許可證可遭撤銷，而且會受到檢控。

條 件

1. 可使用機動設備及 / 或進行訂明建築工程的建築地盤：

詳細地址：新界青山公路介乎深井與嘉龍村之間

地段編號：-----

地盤範圍 (即可使用機動設備及進行訂明建築工程的地方範圍) 已描劃於夾附的圖則上，而該圖則是本建築噪音許可證的一部分。

2. 該地盤部份 / 全部 \* 位於指定範圍之內 / 外\*。  
3. 機動設備

- a. 在地盤範圍內可使用的各項機動設備：

各項機動設備的識辨代碼 (如適用的話)	各項機動設備的說明	數目
A 組 : CNP 048	起重機, 流動 (油渣)	貳
B 組 : ---	吊臂貨車, 總重量 ≤ 38 噸	壹
C 組 : CNP 222	拖拉機	肆

- b. 可使用機動設備的建築噪音許可證有效期：

生效日期及時間：二零零五年六月四日 晚上十一時正

日期及時間：任何三個 七小時 時段：凌晨零時正 至 上午六時正 及

晚上十一時正 至 晚上十二時正。

此部分許可證屆滿日期及時間：二零零五年七月十日 上午六時正

日期 時間

- c. 建築地盤須備有本建築噪音許可證所述每件機動設備的照片各一幀，供監督隨時查看；該等照片須經監督認可。

- d. 規限使用機動設備的其他條件：

參見附頁






Sheet Attached to Construction  
Noise Permit No. GW-RW0331-05.

3d. Other conditions imposed on the use of the powered mechanical equipment:

1. Only one group of the powered mechanical equipment listed in condition no.3a shall be operated at any time.
2. The "Key Information" sheet or a copy thereof must be displayed at all times next to the original or the copy of this Construction Noise Permit at the location specified in item 5 of the Permit Conditions.
3. The construction work in relation to this Construction Noise Permit shall only be carried out with prior notification of the location, the date and the time of the work to reach the Authority by email (email address:hotline\_w@epd.gov.hk),fax (fax no.:24113073) or by post at least 48 hours before commencing the work.
4. All care shall be taken to ensure that the construction work is carried out as quickly as possible with due regard for the potential noise intrusion which may result.



Signed: \_\_\_\_\_

  
(I FUNG Cho-shing)  
for Authority

建築噪音許可證  
編號 GW-RW0331-05 的附頁

3d. 規限使用機動設備的其他條件：

1. 在任何時間內，只可使用條件 3a 內載的其中一組機動設備。
2. 在任何時間內，許可證持有人須把「主要資料」或其副本及本許可證或其副本並列展示在許可證條件 5 的指定位置。
3. 在進行此許可證內所載列的建築工程時，必須確保已於施工前 48 小時將施工地點、日期及時間等資料以電子郵件(電郵地址:hotline\_w@epd.gov.hk)、傳真(傳真號碼：2411 3073) 或郵遞方式送達監督。
4. 本許可證持有人須竭力從速完成該等工程，並小心防範會引起的噪音干擾。



監督

(梁祖成



代行)