

Emission Control Project at Castle Peak Power Station "B" Units



Ex on Mobil

Environmental Monitoring and Audit Monthly Report

October 2009



Emissions Control Project at Castle Peak Power Station 'B' Units

Environmental Monitoring and Audit Monthly Report

October 2009

	Certified by:	Verified by:	
Name	David Yip	Marcus Ip	
Position	Environmental Team Leader	Independent Environmental Checker	
Signature	Drifer	Champ.	
Date	6 Nov 2009	6 November 2009	

Revision No.	Date	Remarks
0	9 November 2009	Issue to EPD

Table of Content

Execu	tive Summary	1
1.	Basic Project Information	6
1.1	Background	б
1.2	Project Organisation	б
1.3	Construction Activities and Project Programme	б
1.4	Summary of EM&A Requirements	7
2.	Environmental Status	2
2.1	Project Works undertaken during the Reporting Month	2
2.2	Construction Works to be undertaken in the Coming Month14	4
2.3	Status of Submissions to EPD14	4
3.	Monitoring Results10	б
3.1	Groundwater Monitoring10	б
3.2	Marine Water Quality Monitoring	0
3.3	Ecology Monitoring	0
4.	Implementation Status of EIA Recommendations	3
4.1	Environmental Mitigation Implementation Schedule2	3
4.2	Implementation status of Event and Action Plan2	3
4.3	Site Environmental Inspection and Audit	3
4.4	Implementation status of Complaint Handling Procedure22	3

List of Figures

Figure 1.1	Location of the EC Project Site
Figure 1.2	EC Project Site General Layout Arrangement
Figure 1.3	Integrated Project Environmental Team
Figure 3.1	Location of Groundwater Monitoring Wells

List of Tables

- Table 2.1
 Key construction works undertaken in the reporting month
- Table 2.2Environmental Permit No. EP-251/2006 Submissions for
Decommissioning/Construction Stage
- Table 3.1Summary of groundwater monitoring results
- Table 4.1Summary of Bi-weekly IEC Site Inspection
- Table 4.2Summary of Weekly ET Site Inspection

List of Photos

- E. 1 Unit B1 and Unit B2 FGD Areas
- E. 2 Common Limestone Preparation and Gypsum Dewatering Areas
- E. 3 Gypsum Handling Area
- E. 4 Waste Water Treatment Plant Area

Appendices

- Appendix A Certificates of Analysis for Groundwater Monitoring
- Appendix B Dolphin Monitoring Sighting Record
- Appendix C Construction Phase Environmental Mitigation Implementation Schedule

Executive Summary

This is the 24th monthly Environmental Monitoring and Audit (EM&A) report for the Emissions Control Project at Castle Peak Power Station 'B' Units (EC Project) prepared by the Environmental Team (ET), with reference to the EPD's Environmental Monitoring and Audit – Guidelines for Development Projects in Hong Kong.

This report presents the implementation status of EM&A requirements in October 2009 as per the Project Environmental Impact Assessment (EIA) Report (EIAO Register No.: AEIAR-102/2006) and Environmental Permit (EP) No. EP-251/2006.

Key Project Works in the reporting month

The key project activities in the reporting month are summarized below:

- Flue Gas Desulphurization Absorbers
 - Mechanical erection works of Unit B1 B4 FGD Absorbers. (*Photo E.1*)
 - Plant erection works at the Unit B1 and Unit B2 Gas-to-Gas Heater Area, Common Limestone Preparation and Gypsum Dewatering Areas (*Photo E.2*), Limestone Handling Area, Gypsum Handling Area (*Photo E.3*) and Waste Water Treatment Plant Area (*Photo E.4*).
- Civil Works
 - Pile cap construction works for Unit B3 and Unit B4 Gas-to-Gas Heaters.
- Material Handling Berth Work
 - Underwater piling works and quay construction works for the Material Handling Berth.
- NOx Reduction Facilities Erection
 - Commissioning activities on Unit B4 Boosted Over-fire Air System and Selective Catalytic Reduction System.
 - Plant erection works of Urea Handling Area, Unit B2 BOFA and Selective Catalytic Reduction System.
- EC Transformers Installation
 - EC Transformers commissioning works.
- Stack Lining Installation
 - Unit B2 stack lining installation works.

Environmental Monitoring

The implementation status of the Project EM&A programmes are summarized below:

- Groundwater monitoring
 - The Groundwater monitoring program for 2008 was completed in October and the results indicated that the TPH levels has consistently remained well below the relevant Risk-based Remediation Goals (RBRGs) value.

In view of this, the groundwater monitoring frequency for 2009 is reduced to twice a year as per the email confirmation (dated 07 November 2008) from EPD to the Independent Environmental Checker. *(Section 3.1)*

The 2nd half-yearly groundwater monitoring for 2009 was conducted in the reporting month. Groundwater samples were taken from the three designated sampling points on 15 October 2009 for TPH measurement and all results indicated that TPH levels continue to remain well below the relevant RBRGs value.

The groundwater monitoring program for 2010 is to be confirmed with EPD.

- Marine water quality monitoring
 - Baseline water quality monitoring programme was completed on 21 December 2007 according to the schedule submitted to EPD on 6 November 2007. The Baseline Water Quality Monitoring Report was revised to address EPD's comments on the first submission and resubmitted to EPD on 4 March 2008.
 - According to the EIA report, impact monitoring on marine water quality shall be carried out 3 days a week, at mid-flood and mid-ebb tides, during the dredging works. There was no dredging works conducted during the reporting month and therefore impact monitoring was not required. (*Section 3.2*).
- Ecology monitoring
 - According to the EIA report, visual cetaceans monitoring is required solely during underwater percussive piling works. Underwater percussive piling works for Material Handling Berth construction were conducted during the reporting month and visual cetaceans monitoring was carried out as per the Environmental Permit. (Section 3.3)

Environmental Mitigation Implementation Schedule

Environmental mitigation measures for the construction stage were implemented as per the EIA Report. (Section 4.1)

Implementation Status of Event and Action Plan

Dredging works were not yet commenced in the reporting month so impact monitoring for marine water quality was not required and hence the Event and Action Plan was not applicable. (Section 4.2)

Site Environmental Inspection


Joint site inspection was conducted by the ET and contractors on a weekly basis, and independent audit was conducted by the Independent Environmental Checker (IEC) on a bi-weekly basis. All required follow-up actions were implemented by the relevant contractors and verified by the Integrated Project Environmental Team in the subsequent site inspections. (Section 4.3)

Environmental Complaint and Enquiries

No complaint or enquiries were received in the reporting month. (Section 4.4)

Key Project Works in the reporting month

E. 1 Unit B1 and Unit B2 FGD Areas

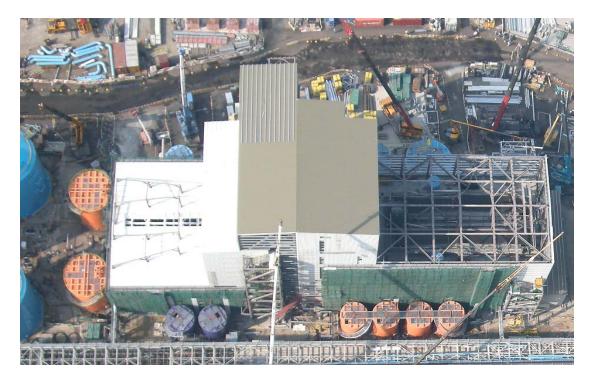

E. 2 Common Limestone Preparation and Gypsum Dewatering Areas



E. 3 Gypsum Handling Area



E.4 Waste Water Treatment Plant Area

1. Basic Project Information

1.1 Background

The Emissions Control Project at Castle Peak Power Station "B" Units (the Project) involves the installation of additional emissions control facilities to further reduce air emissions from the operation of these units. The emissions control facilities to be installed in the Castle Peak Power Station "B" Units (CPB) include NO_x reduction facilities and Limestone Flue Gas Desulphurisation (LS FGD) for SO₂ reduction. The location of the Site is presented in *Figure 1.1*. An overview of the Project Site general arrangement is presented in *Figure 1.2*.

1.2 Project Organisation

An Integrated Project Environmental Team has been set up to manage the environmental issues associated with the EC Project. The Project Environmental Team comprises the Project Environmental Team Leader (ETL), the Project Regulatory Compliance and Environmental Officer, and the Project Environmental Officer. The Project Environmental Team organisation is depicted in *Figure 1.3*.

1.3 Construction Activities and Project Programme

The construction of the Project involves demolition and relocation of certain existing facilities. While the existing generating units will remain in their current locations, some of the auxiliary and common facilities to the south of the generating units at CPB will be demolished or relocated to provide space for the emission control and related facilities. The scope of the Project is as follows:

- Demolition of some existing facilities at CPB including the Fuel Oil Day Tank, Fuel Oil Pump House and Dangerous Goods (DG) Store;
- Relocation or re-routing of existing facilities including Ash and Dust Control Room, Underground Pipeworks, Carbon Dioxide (CO₂) Storage Tank, Liquefied Petroleum Gas (LPG) Storage Tanks, Intermediate Pressure Reduction Station, Oil Interceptors, Oils Sump, Oil Sewer Manholes and Foul Water Pumping Station;
- Provision of Reagent and By-Product Handling and Storage Facilities including limestone store, limestone slurry tanks, gypsum dewatering and storage facilities;
- Installation of new emission control equipment and facilities for NOx and SO₂ control;
- Provision of additional berthing facilities for loading and unloading of the additional reagents and gypsum.

The civil works of the EC Project were commenced on 26 September 2007. These included piling works, foundation works, roads and other civil engineering works and would be executed in a phased manner. Start-up of the retrofitted units are scheduled from end 2009 to 2011.

1.4 Summary of EM&A Requirements

An Environmental Impact Assessment (EIA) for the Project was undertaken and the EIA Report was approved under the *Environmental Impact Assessment Ordinance* (EIAO) (Cap499) on 25 October 2006 (EIAO Register No.AEIAR-102/2006). Environmental Permit (EP) No. EP-251/2006 for the Project was granted on 10 November 2006. Condition 3.2 of the EP requires an EM&A programme to be implemented in accordance with the procedures and requirements set out in the approved EIA Report (EIAO Register No. AEIAR-102/2006).

The EM&A requirements for the EC Project are summarized below:

- Establish baseline water quality levels at designated locations;
- Implement construction impact monitoring programmes for water quality and dolphin monitoring;
- Implement inspection and audit programmes for water quality and dolphin monitoring;
- Liaise with, and provide environmental advice (as requested or when otherwise necessary) to construction site staff on the comprehension and consequences of the environmental monitoring data and exceedances;
- Identify and resolve environmental issues and other functions as they may arise from the works;
- Check and advice the Contractor's overall environmental performance, the implementation of Event and Action Plans (EAPs), and remedial actions taken to mitigate adverse environmental impacts as they may arise from the works;
- Conduct monthly reviews of monitored impact data as the basis for assessing compliance with the defined criteria and to ensure that necessary mitigation measures are identified and implemented, and to undertake additional ad hoc monitoring and auditing as required by special circumstances;
- Evaluate and interpret all environmental monitoring data to provide an early indication should any of the environmental control measures or practices fail to achieve the acceptable standards, and to verify the environmental impacts predicted in the EIA Report;
- Manage and liaise with other individuals or parties concerning other environmental issues deemed to be relevant to the construction process;
- Conduct regular site inspections to assess:
 - the level of the Contractor's general environmental awareness;

- the Contractor's implementation of the conditions in the EP and the recommendations in the EIA Report;
- the Contractor's performance as measured by the EM&A programme;
- the need for specific mitigation measures to be implemented or the continued usage of those previously agreed; and
- to advise the Site Staff of any identified potential environmental issues.
- Submit Monthly EM&A Reports which summarize environmental monitoring and auditing data, with interpretation illustrating the acceptability or otherwise of any environmental impacts and identification or assessment of the implementation status of agreed mitigation measures.

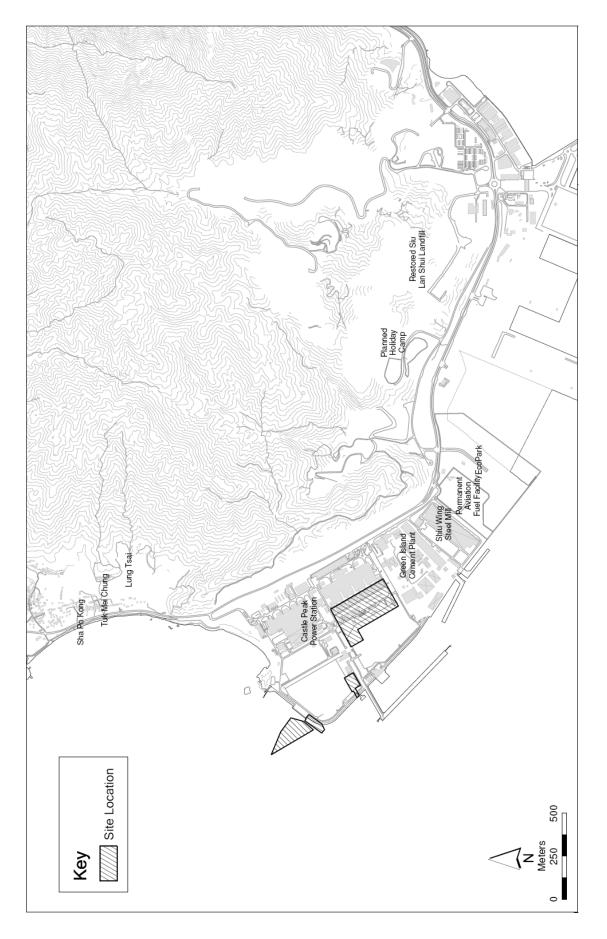


Figure 1.1 Location of the EC Project Site

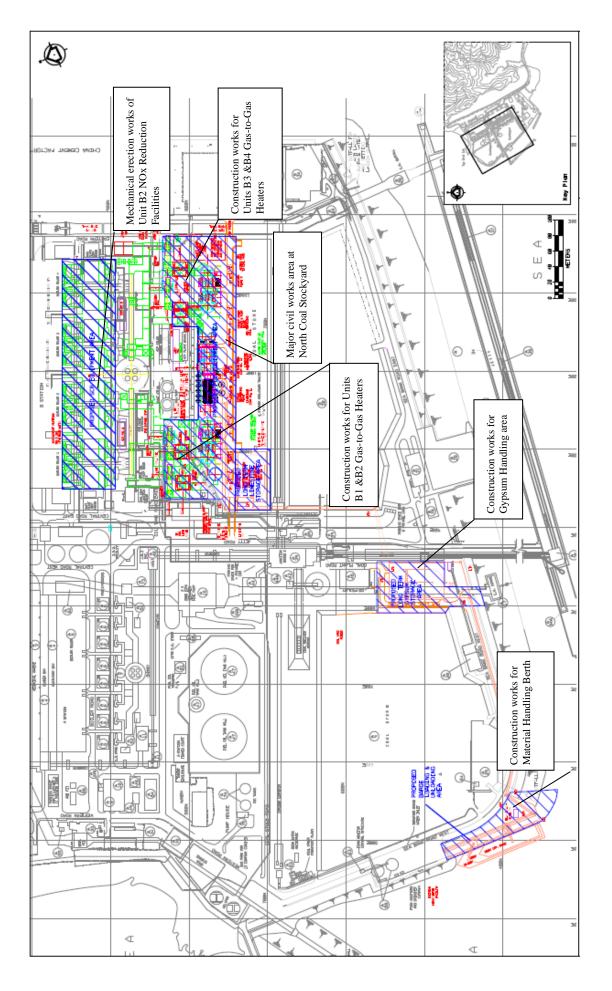


Figure 1.2 EC Project Site General Layout Arrangement

Integrated Project Environmental Team

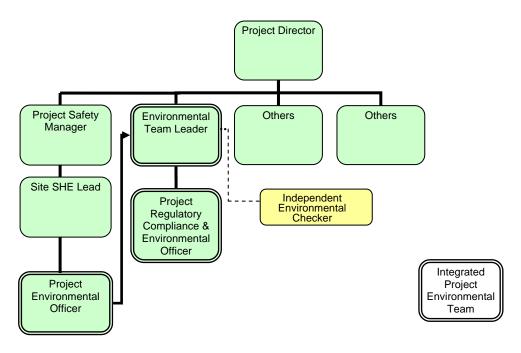


Figure 1.3 Integrated Project Environmental Team

2. Environmental Status

2.1 **Project Works undertaken during the Reporting Month**

The key site works undertaken in the reporting month and implementation of the required environmental protection measures are summarized in *Table 2.1* below.

Table 2.1	Key construction works undertaken in the reporting month

	Construction Activities	Environmental Protection Measures
FGD Erection & Civil Works	 Plant erection at the Unit B1 and Unit B2 Gas-to- Gas Heater Area, Common Limestone Preparation and Gypsum Dewatering Areas, Limestone Handling Area, Gypsum Handling Area, Waste Water Treatment Plant, Unit B1 – B4 FGD Absorbers. Pile cap construction works for Unit B3 and Unit B4 Gas-to-Gas Heaters. 	 Dust suppression on access roads; Temporary stockpiles were either wetted or covered by tarpaulin sheet to prevent dust emission; Wheel wash facility in place to prevent mud trail by vehicles leaving the project site; Spillage control measures (e.g. drip tray, spill kit) were implemented; Proper on-site chemical waste store was provided.
Relocation / Balance of Plant / Electrical	 EC Transformers commissioning work. Services diversion, e.g. cables and other station utilities 	 Wheel wash facility in place to prevent mud trail by vehicles leaving the project site; Spillage control measures (e.g. drip tray, spill kit) were implemented; Dust suppression measures in place; Proper on-site chemical waste store was provided.
NOx Reduction Facilities Erection	 Commissioning activities on Unit B4 Boosted Over- fire Air System and Selective Catalytic Reduction System. Plant erection works at Urea Handling Area, Unit B2 BOFA and Selective Catalytic Reduction System 	 Spillage control measures (e.g. drip tray, spill kit) were implemented; Proper on-site chemical waste store was provided.

	Construction Activities	Environmental Protection Measures
Material Handling Berth Work	• Underwater piling works and quay construction works for Material Handling Berth.	 Dust suppression measures in place; Air bubble curtain was installed; Spillage control measures (e.g. drip tray, spill kit) were implemented; Proper on-site chemical waste store was provided.
Stack Lining Installation	• Unit B2 stack lining installation works.	 Chemical waste storage area to be set up; Proper on-site chemical waste store was provided.

2.2 Construction Works to be undertaken in the Coming Month

The key site activities in the coming month are summarized below:

- Civil Works
 - Continue quay construction works for the Material Handling Berth.
- NOx Reduction Facilities
 - Continue commissioning activities of Unit B4 BOFA and Selective Catalytic Reduction System.
 - Continue erection of the Urea Handling Plant, Unit B2 BOFA and Selective Catalytic Reduction System.
- Flue Gas Desulphurization Absorbers
 - Continue mechanical erection of the Unit B1 and Unit B2 FGD Absorbers.
 - Continue plant erection at the Unit B1 and Unit B2 Gas-Gas Heaters, Common Limestone Preparation and Gypsum Dewatering Areas, Gypsum Handling Area, Waste Water Treatment Plant.
- Stack Lining Installation
 - Continue Unit B2 stack lining installation.

The potential environmental impacts associated with the above construction works include dust emission, construction surface runoff, oil spillage and chemical wastes. Preventive measures have been and will continue to be implemented as per the Environmental Mitigation Implementation Schedule for the EC Project Construction Phase.

2.3 Status of Submissions to EPD

The status of submissions to EPD as required under the Environmental Permit No. EP-251/2006 is summarized in *Table 2.2* below.

EP	Submission	Timing for Submission	Target	Actual
Condition			Submissio	Submissio
Ref			n Date	n Date
General Cor	nditions			
1.11	Commencement Dates of decommissioning and		As per	4/07/07 &
	construction of the Project	of decommissioning and construction	schedule	20/08/07
		respectively		respectivel
ubmission	before/after Commencement of Decommission			-
2.3	Management organisation of the main	At least 1 month after commencement of	As per	26/10/07
	decommissioning/construction companies	decommissioning/construction of the Project	schedule	
	and/or any form of JV associated with the			
	Project (including organisation chart, names of			
	responsible persons and their contact details)			
2.4	Details of any change to emission reduction	At least 3 months before commencement of	If	
	process described and assessed in the EIA	construction of relevant facilities	applicable	
	Report (Register No.: AEIAR - 102/2006) for			
M&A Req				
3.1	Groundwater Monitoring Plan	At least 1 month before commencement of	As per	1st issue -
		construction of the Project	schedule	20/07/07
				2nd issue -
				5/09/07
				3rd issue -
				20/11/07
				4th issue -
				27/02/08
3.3	Baseline Water Quality Monitoring Report	At least 1 month before commencement of	As per	1st issue -
		dredging works	schedule	29/01/08
				2nd issue -
				4/03/08
3.4	Monthly EM&A Report	Within 10 working days at the end of the	As per	As per
		reporting month	schedule	schedule
3.5	Post-Project Monitoring Report for Dredging	Within 1 week of completion of the Post-	As per	
	Works	Project Monitoring for the dredging works	schedule	
lectronic R	Reporting of EM&A Information		·	·
4.2	Written notification on the internet address of	Within 6 weeks after the commencement of	As per	06/11/07
	EM&A website to Director of Environmental	construction of the Project	schedule	

 Table 2.2
 Environmental Permit No. EP-251/2006 - Submissions for Decommissioning / Construction Stage

3. Monitoring Results

3.1 Groundwater Monitoring

With respect to the requirement specified in the Environmental Permit No. EP-251/2006, monitoring of the total petroleum hydrocarbon (TPH) in the groundwater within the Project site during construction and operation of the Project is required. A Groundwater Monitoring Plan has been developed to define the groundwater monitoring locations, methodology for groundwater monitoring as well as the monitoring schedule.

Bi-weekly Groundwater Monitoring Programme for the initial period of three months after the commencement of major piling and foundation works was successfully concluded on 25 January 2008. The TPH monitoring results for the initial three-month period consistently remained well below the relevant Risk-based Remediation Goals (RBRGs) values, and therefore the remaining groundwater monitoring for 2008 was conducted on a quarterly basis in accordance with the Groundwater Monitoring Plan (Rev 4), which had been accepted by EPD.

The Groundwater Monitoring Program for 2008 was completed in October 2008 with all results well within the Risk-Based Remediation Goals (RBRGs) stated in the EPD's Guidance Note for Contaminated Land Assessment and Remediation. In view of this, the groundwater monitoring frequency for 2009 is reduced to twice a year as per the email confirmation (dated 07 November 2008) from EPD to the Independent Environmental Checker.

The 2nd half-yearly Groundwater Monitoring for 2009 was conducted in the reporting month. Groundwater samples were taken from the three designated sampling points on 15 October 2009 for TPH measurement and all results indicated that TPH levels continue to remain well below the relevant RBRGs value.

The groundwater monitoring program for 2010 is to be confirmed with EPD.

3.1.1 Monitoring Location

According to the Groundwater Monitoring Plan, three (3) groundwater monitoring well locations within the Project site, namely MW1 to MW3, have been installed for the groundwater monitoring during the construction of the Project, including:

- MW1: located adjacent to the north-east corner of the existing Coal Plant Substation;
- MW2: located north-west of the existing ACP Plant House; and

• MW3: located adjacent to the north-east corner of the existing ACP Plant House.

The location of the groundwater monitoring wells is shown in *Figure 3.1*.

3.1.2 Monitoring Methodology

Purpose made HDPE slotted risers and blank pipes (50mm diameter) were used for installation the groundwater wells. Wells were purged (using new bailers) five times the volumes of the wells after installation to get rid of dirt or potential cross contamination during well installation, and purged three times the volumes of the wells before each sampling to ensure no stagnant groundwater was collected and that the representative samples from each well was collected.

After purging, groundwater was sampled from the monitoring wells using new disposable Teflon bailers for each sampling at each location to eliminate the risk of cross contamination. Any free-floating products in groundwater, if observed, were also collected for laboratory analysis.

The samples were then dispatched to an HOKLAS-accredited analytical laboratory for analysis as soon as practicable following sampling. All samples were handled under chain of custody protocols and relinquished to the laboratory representative at the site.

The samples were analysed for TPHs, using United States Environmental Protection Agency (US EPA) Methods 8260 and 8015, by the HOKLAS-accredited analytical laboratory.

3.1.3 Monitoring Parameters and Frequency

According to the Groundwater Monitoring Plan, groundwater was sampled from the monitoring wells on a half-yearly basis, with reference to the revised Groundwater Monitoring Program as approved by EPD on 7 November 2008, during the reporting month.

With respect to the requirement specified in the Environmental Permit No. EP-251/2006, the groundwater samples collected were analyzed for Total Petroleum Hydrocarbons (TPHs) concentrations for all three monitoring locations.

3.1.4 Monitoring Results

The monitoring results for measurement of TPHs concentrations for all three monitoring locations are summarized in *Table 3.1* below.


Table 3.1 Summary of groundwater monitoring results

Sampling	Total Petroleum	Sampling Location				**RBRGs
Date	Hydrocarbons	MW1 MW1a* MW2 MW3				for
	(TPHs)	μg/L	μg/L	μg/L	μg/L	Groundwater (Industrial)
						μg/L
15-Oct-	C6-C8	<20	<20	<20	<20	1.15E+06
2009	C9-C16	<100	<100	<100	<100	9.98E+06
	C17-C35	<150	<150	<150	<150	1.78E+05

* Duplicate sample of MW1 for quality control purpose.

** Risk-based Remediation Goals (RBRGs) quoted from the "EPD Guidance Note for Contaminated Land Assessment and Remediation".

The TPHs concentrations in all samples were well below the RBRGs for groundwater for industrial area. The Certificates of Analysis for the above groundwater monitoring are shown in *Appendix A*.

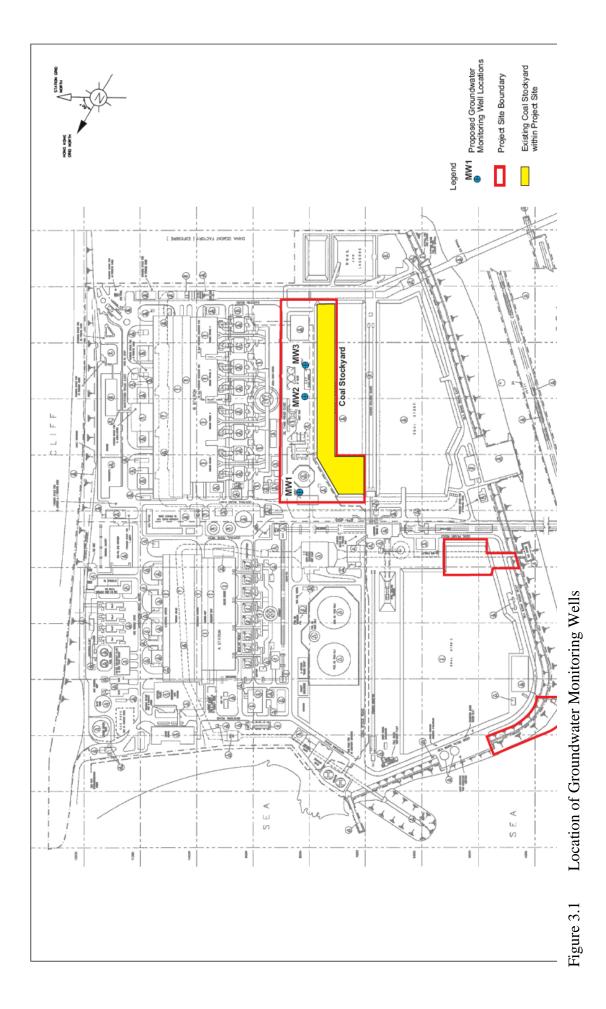

3.2 Marine Water Quality Monitoring

With respect to the requirement specified in the Environmental Permit No. EP-251/2006, monitoring of marine water quality during the construction phase is required to evaluate whether any impacts would be posed by the dredging operations on the surrounding waters during the construction period of the dredging works. Baseline monitoring (prior to the dredging works), impact monitoring (during any works related to the dredging works) and post-project monitoring (after completion of the dredging) shall be carried out according to the monitoring locations, monitoring parameters and frequency specified in the EIA Report.

Baseline water quality monitoring programme was completed on 21 December 2007 according to the schedule submitted to EPD on 6 November 2007. The Baseline Water Quality Monitoring Report was revised to address EPD's comments on the first submission and resubmitted to EPD on 4 March 2008.

According to the EIA report, impact monitoring on marine water quality shall be carried out 3 days a week, at mid-flood and mid-ebb tides, during the dredging works. There was no dredging works conducted during the reporting month and therefore impact monitoring was not required.

3.3 Ecology Monitoring

With respect to the requirement specified in the Environmental Permit No. EP-251/2006, visual cetacean monitoring should be conducted during the underwater percussive piling works to evaluate whether there have been any effects on the animals.

Underwater percussive piling works were conducted during the reporting month and visual cetaceans monitoring was carried out as per the Environmental Permit.

3.3.1 Monitoring Duration and Frequency

Daily visual cetaceans monitoring was conducted whenever there was underwater percussive piling works in the reporting month.

3.3.2 Monitoring Methodology

Dolphin Exclusion Zone

A dolphin exclusion zone was identified within a radius of 500 m from the percussive piling works area. The exclusion zone around the work area was scanned for at least 30 minutes prior to the commencement of piling. If cetaceans were observed in the exclusion zone, underwater percussive piling would be delayed until they had left the area.

Dolphin Observation

The observer was standing at a location on the piling barge that allows for an observation height of 4 to 5 m above water level at the observer's eye level and relatively unobstructed forward visibility. Observation by the observer was conducted by searching with Fujinon 7 x 50 marine binoculars, scanning the area with the naked eye and occasional binocular check. The observer was remained alert at all times during the entire observation period.

Field Record

A sighting record was filled in immediately at the initial sighting with data on the time, position, distance and bearing of the sighting. All other information on sea state, weather conditions (i.e. wind speed according to the Beaufort Scale), as well as notes on dolphin appearance, behaviour, direction of movement, response to boat and any other relevant information were completed at the end of the sighting.

Construction works

When dolphins were spotted within the exclusion zone, construction works would cease and would not resume until the observer confirmed that the zone has been continuously clear of dolphins for a period of 30 minutes (thereby adequately spanning the approximate maximum dive time of the dolphins of 4 minutes). Dolphin sighting position, data on sighting angle, distance to the group, group size and behaviour were recorded.

3.3.4 Monitoring Result

No dolphin was spotted within the exclusion zone during the underwater percussive works in the reporting month. The dolphin monitoring sighting record is given in *Appendix B*.

4. Implementation Status of EIA Recommendations

4.1 Environmental Mitigation Implementation Schedule

Environmental mitigation measures for the construction stage were implemented as per the EIA Report.

An updated summary of the Environmental Mitigation Implementation Schedule (EMIS) is presented in *Appendix C*.

4.2 Implementation status of Event and Action Plan

Dredging works has not yet commenced in the reporting month so impact monitoring for marine water quality was not required and hence the Event and Action Plan was not applicable.

4.3 Site Environmental Inspection and Audit

Independent Environmental Checker (IEC) conducted bi-weekly site inspection on the 16th October and 30th October 2009 respectively. All the follow-up actions to respond to the IEC observations have been completed by the relevant contractors and verified in the subsequent site inspections by the Integrated Project Environmental Team.

Summary of the IEC site inspections is shown in *Table 4.1*.

Joint site audits were carried out by the Integrated Project Environmental Team (ET) with contractors on a weekly basis to monitor environmental issues at the construction sites to ensure that all mitigation measures were implemented timely and properly. All required mitigation measures were implemented by the relevant contractors and verified in the subsequent site inspections by the Integrated Project Environmental Team.

Summary of the weekly ET site inspections is shown in *Table 4.2*.

4.4 Implementation Status of Complaint Handling Procedure

No complaint or enquiries were received in the reporting month.

Date of	Observations	Follow-up action	
Inspection 16/10/09	An unlabelled diesel drum was observed adjacent to a generator near the seawall of the Material Handling Berth work site.	The identified diesel drum was properly labelled and removed to the chemical store by the Contractor.	
	A tin of chemical was placed inside a pile near the seawall in the Material Handling Berth work site.	The identified chemical was removed to the chemical store by the Contractor.	
	The noise label on an air compressor near the seawall of the Material Handling Berth was observed to be not clear. The stop plug on the drip tray was also observed to be missing.	The noise label was cleaned up by the Contractor. Stop plug was replaced to the drip tray.	
	Rubbish was observed to have accumulated on the ground near the proposed Gypsum Handling Plant in the West Coal Yard.	The rubbish was cleared up by the Contractor.	
	A bottle of chemical was observed not labelled in one of the chemical storages of the proposed limestone preparation plant.	The identified bottle of chemical was properly labelled by the Contractor.	
	The drip tray of a generator near B2 duct working area was observed to be slightly damaged.	The damaged drip tray was repaired by the Contractor.	
30/10/09	A tin of chemical was placed on the edge of the seawall of the Material Handling Berth work site.	The identified chemical was removed to the chemical store by the Contractor.	
	Soil piles stored in the South Coal Yard were observed to be loose and may be subjected to wind erosion.	The exposed soil piles were compacted by the Contractor for dust control.	
	Two tins of chemicals were observed to be placed beneath the rest room in B2 duct working area without spillage containment measures.	The identified chemicals were removed to the chemical store by the Contractor.	
h		•	

Table 4.1Summary of Bi-weekly IEC Site Inspections

Week of Inspection	Observations	Follow-up action
04/10/09- 10/10/09	- Construction wastes at the stack lining work area to be timely removed.	- The construction wastes were collected by a licensed waste collector for off-site disposal.
	- Chemical wastes at the FGD work area to be timely removed.	- The chemical wastes were collected by a licensed chemical waste collector for off-site disposal.
11/10/09- 17/10/09	- A drum of diesel at the stack lining work area to be properly labelled.	- The identified diesel drum was properly labelled by the Contractor.
	- Drain plug to be provided for a drip tray at the Material Handling Berth area.	- Drain plug was replaced to the drip tray by the Contractor.
	- Oil stains underneath a mobile crane to be cleared up.	- The oil stains were cleared up by the Contractor with oil absorbent.
18/10/09- 24/10/09	- A drum of chemical at the Sea Bank Road area to be properly labelled.	- The identified drum of chemical was properly labelled by the Contractor.
	- Dust suppression at the Gypsum Handling Area to be enhanced.	- Water spray was applied to the haul road by the Contractor.
25/10/09- 31/10/09	- Non-chemical waste items to be removed from the chemical waste skip at the stack lining work area.	- The non-chemical waste items were removed from the chemical waste skip by the Contractor.
	- Exposed stockpiles at the Material Handling Berth area to be properly covered.	- The exposed stockpiles were removed for back filling by the Contractor.

Table 4.2Summary of Weekly ET Site Inspection

Appendices

Appendix A Certificates of Analysis for Groundwater Monitoring

ALS Technichem (HK) Pty Ltd

ALS Laboratory Group

ANALYTICAL CHEMISTRY & TESTING SERVICES



	CERTIFICATE OF ANALYSIS					
Client Contact	: CLP POWER HONG KONG LTD : MR C M TONG	Laboratory Contact	: ALS Technichem HK Pty Ltd : Chan Kwok Fal, Godfrey	Page Work Order	HK0921777	
Address	: EC PROJECT DEPT. CASTLE PEAK POWER STATION, 1 LUNG YIU STREET, TUEN MUN, N.T., HONG KONG	Address	: 11/F., Chung Shun Knitting Centre, 1 - 3 Wing Yip Street, Kwai Chung, N.T., Hong Kong			
E-mail Telephone Facsimile	: cmtong@clp.com.hk : 2678 5088 :	E-mail Telephone Facsimile	: Godfrey.Chan@aisenviro.com : +852 2610 1044 : +852 2610 2021			
Project Order number C-O-C number Site	: CPPS LAND CONTAMINATION SURVEY : : H000553 :	Quote number	:	Date Samples Received Issue Date No. of samples received No. of samples analysed	: 15-OCT-2009 : 29-OCT-2009 : 4 : 4	

General Comments

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted. All pages of this report have been checked and approved for release. When date(s) and/or time(s) are shown bracketed, these have been assumed by the laboratory for processing purposes. If the sampling time is displayed as 0.00 the information was not provided by client. The completion date of analysis is: 22-OCT-2009

Key: LOR = Limit of reporting: CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society. Specific comments for Work Order: HK0921777

Sample(a) were collected by ALS Technichem (HK) staff on 15 October, 2009.

Water sample(s) analysed and reported on an as received basis.

NAPL of groundwater samples are not observable in the aqueous layer during site investigation and monitoring.

This report may not be reproduced except with prior written approval from the testing laboratory.	This document has been electronically signed by those names that appear on this report and are the authorised signatories. Electronic signing has been carried out in compliance with procedures specified in the Electronic Transactions Ordinance of Hong Kong, Chapter 553, Section 6.			
	Signatories	Position	Authorised results for	
	Anh Ngoc Huynh	Senior Chemist	Organics	





Page Number	2 of 3
Client	: CLP POWER HONG KONG LTD
Work Order	HK0921777

Analytical Results								
Sub-Matrix: WATER		Cile	nt sample ID	MW1	MW2	MW3	MW1a	
	CIV	ent samplin	g date / time	15-OCT-2009 08:00	15-OCT-2009 08:30	15-OCT-2009 08:45	15-OCT-2009 08:15	
Compound	CAS Mumber	LOR	Unit	HK0921777-001	HK0921777-002	HK0921777-003	HK0921777-004	
EP-071HK: Total Petroleum Hydrocart	oons (TPH)							
C6 - C8 Fraction		20	µg/L	<20	<20	<20	<20	
C9 - C16 Fraction		100	µg/L	<100	<100	<100	<100	
C17 - C35 Fraction	122	150	µg/L	<150	<150	<150	<150	
EP-080S: TPH(Volatile)/BTEX Surroga	te						Surrogate control limits	listed at end of this report.
Dibromofluoromethane	1868-53-7	0.1	96	99.6	101	107	91.8	
Toluene-D8	2037-26-5	0.1	%	101	102	99.0	100	
4-Bromofluorobenzene	460-00-4	0.1	%	90.1	87.5	87.1	87.6	

A Campbel Brothers Limited Company



HK0921777 Laboratory Duplicate (DUP) Report

CLP POWER HONG KONG LTD

: 3 of 3

Page Number Client

Work Order

latrix: WATER					L	aboratory Duplicate (DUP)	Report	
Laboratory sample ID	Client sample ID	Method: Compound	CAS Number	LOR	Unit	Original Result	Dupilcate Result	RPD (N)
EP-071HK: Total P	etroleum Hydrocarbon	s (TPH) (QC Lot: 1132989)						
HK0921478-001	Anonymous	C6 - C8 Fraction		0.02	mg/L	<0.02	<0.02	0.0

Method Blank (MB), Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report

Matrix: WATER Method: Compound CAS Number		Method Blank (MB) Report		Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report							
				Spike	Spike Recovery (%)		Recovery Limits (%)		RPD (%)		
		LOR	Unit	Result	Concentratio	LCS	DCS	Low	High	Value	Control Lim
EP-071HK: Total Petroleum Hydro	carbons (TPH) (QC Lot: 113	2989)			n						
C6 - C8 Fraction	1970 - 1998) 1970	0.5	mg/L	⊲0.02	0.15 mg/L	84.0	=	78	113		=
EP-071HK: Total Petroleum Hydro	carbons (TPH) (QC Lot: 113	3009)									
C9 - C16 Fraction		0.5	mg/L	⊲0.5	0.25 mg/L	61.3	1	17	163		
C17 - C35 Fraction		0.5	mg/L	⊲0.5	0.5 mg/L	103	(32	132		

Matrix Spike (MS) and Matrix Spike Duplicate (MSD) Report

No Matrix Spike (MS) or Matrix Spike Duplicate (MSD) Results are required to be reported.

Surrogate Control Limits

Sub-Matrix: WATER		Recovery Limits (%)			
Compound	CAS Number	Low	High		
EP-080S: TPH(Volatile)/BTEX Surrogate					
Dibromofluoromethane	1868-53-7	86	118		
Toluene-D8	2037-26-5	88	110		
4-Bromofluorobenzene	460-00-4	86	115		

A Campbell Brothers Limited Company

Oct 2009	Underwater piling work carried? (Y/ N)	Dolphin observed? (Y/ N)	Sighting Sheet No.	Remarks
1	N	-		
2	Y	Ν	121	
3	Ν	-		
4	Ν	-		
5	Y	Ν	122	
6	Y	Ν	123	
7	Ν	-		
8	Ν	-		
9	Ν	-		
10	Ν	-		
11	Ν	-		
12	Ν	-		
13	N	-		
14	Ν	-		
15	N	-		
16	Ν	-		
17	N	-		
18	N	-		
19	N	-		
20	N	-		
21	N	-		
22	N	-		
23	N	-		
24	Y	N	124	
25	N	-		
26	N	-		
27	N	-		
28	N	-		
29	N	-		
30	Y	N	125	

Appendix B Dolphin Monitoring Sighting Record

Dolphin Observer Diphin Observer Sighting No. 觀察員 くしの2の名名 觀察記錄編號 (2)
HIGH PRIORITY DATA (Record at Initial Piling) 打椿前記錄 Date 日期 $2/(0/34)$ Time 時間 由 Equipment 儀器 Dinoculars 望遠鏡 Sighting Distance 觀察距離 (metres \Re) G Sighting Angle 觀察角度(°) 160° Sighting Position 觀察位置 Piling Barge (HKGrid: 1000000000000000000000000000000000000
Weather Condition 天氣
Dolphin Found 海豚行蹤 [] Yes 有 [] No 沒有 Percussive Piling interruption Time 停工時間 由 至 Survey Area 出沒地點
LOW PRIORITY DATA (Record During or After Piling) 打樁中或後期記錄 Dolphin Found 海豚行蹤 □ Yes 有 □/No 沒有 Percussive Piling interruption Time 停工時間 由 至 Survey Area 出沒地點
Species 品種 □ Humpback Dolphin 駝背豚 □ Finless Porpoise 江豚 □ Others 其它 Group Size 群組 Best 很多 High 多 CWD Group Composition UC 初生海豚 UJ 無斑點小海豚 群組構成 SJ 斑點小海豚 SS 斑點年青海豚 FP Group Composition Elaves 初生海豚 Adults 成年海豚
BEHAVIOUR 行為/ COMMENTS 評註 ☐Feeding 覓食 ☐Socializing 群聚 ☐Travelling 游動 ☐Milling/Resulting 成群兜圈 ☐Breaching 擊浪 ☐ Spy - hopping 窺探 ☐Porpoishing 躍浪 ☐Other Behaviour 其他行為 Identified Individual(s) 已識別個體 Other Comments 其他
Observer Signature 海豚觀察員簽名: Piling Supervisor Signature 打樁科文簽名:

.

DOLPHIN / PORPOISE SIGHTING SHEET
Dolphin ObserverSighting No.觀察員 $\underline{9092922}$ 觀察記錄編號
HIGH PRIORITY DATA (Record at Initial Piling) 打樁前記錄 Date 日期 $ \underbrace{ \int / \underbrace{ O / O Q}{2} $ Time 時間 由 $ \underbrace{ Q / 200 }{2} $ 至 $ \underbrace{ (\underbrace{ f 200 }{2}) }{2} $ Equipment 儀器 $ \underbrace{ Q }$ Binoculars 望遠鏡 $ \underbrace{ O }$ Compass 指南針 Sighting Distance 觀察距離 (metres $ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\$
Weather Condition 天氣
Dolphin Found 海豚行蹤 □ Yes 有 □ No 沒有 Percussive Piling interruption Time 停工時間 由 至 Survey Area 出沒地點
LOW PRIORITY DATA (Record During or After Piling) 打樁中或後期記錄 Dolphin Found 海豚行蹤 □ Yes 有 □ No 沒有 Percussive Piling interruption Time 停工時間 由 至 Survey Area 出沒地點
Species 品種 □ Humpback Dolphin 駝背豚 □ Finless Porpoise 江豚 □ Others 其它
□ Spy - hopping 窺探 □Porpoishing 躍浪 □Other Behaviour 其他行為 Identified Individual(s) 已識別個體 Other Comments 其他
Observer Signature 海豚觀察員簽名: 半米 化并 表示

Piling Supervisor Signature 打樁科文簽名: _

DOLPHIN / PORPOIS	E SIGHTING SHEET
Dolphin Observer	Sighting No.
觀察員 <u>SC92977</u>	觀察記錄編號 _ 12 乙
HIGH PRIORITY DATA (Record at Initial Piling) 打椿前詞	
Date 日期 (〇 / 〇 / 〇 / 〇 / 〇 / 〇 / 〇 / 〇 / 〇 / 〇	1 至 (月200
Equipment 儀器 🛛 🗹 Binoculars 望遠鏡 🗹 Co	mpass 指南針
Sighting Distance 觀察距離 (metres 米)5	m至、⑦ m
Sighting Angle 觀察角度(°)(子O。 、 \qquad	······································
Sighting Position 觀察位置 <u>Piling Barge</u> (HKG	ulle lalle and The 72
Signting Position	nd: 100020360 Longnude/Latitude(-001210)
/	·
Weather Condition 天氣 🖸 Sunny 天晴 🗌 Rain 雨	天 🗌 Overcast 陰天 🗌 Others 其它
	3 74 15 16 7+
Dolphin Found 海豚行蹤 🗌 Yes 有 🔹 🗔 Ńo 沒衣	5
Percussive Piling interruption Time 停工時間 由 _	
Survey Area 出沒地點	
LOW PRIORITY DATA (Record During or After Piling) 打	法中最多期司法
LOW I MONITI DAIA (Necola During of Alter Philip) 31	悟中以仮别記嫁
Dolphin Found 海豚行蹤 🗌 Yes 有 🛛 🗋 🗋 🗋 🖓	
Percussive Piling interruption Time 停工時間 由 _	至至
Survey Area 出沒地點	
Species 日種 □ Humphack Delahin 較能較 □ Fink	
Species 品種 🗌 Humpback Dolphin 駝背豚 🗍 Finle	
	多 Low 少
CWD Group Composition UC 初生海豚	UJ 無斑點小海豚
	SS 斑點年青海豚
	UA 無斑點成年海豚
FP Group Composition 群組構成 Claves 初生海豚	
The claves 小十位的 _	Adults 成平母脉
BEHAVIOUR 行為/ COMMENTS 評註	
□Feeding 覓食 □Socializing 群聚 □Travelling 游動 []Milling/Resulting 成群兜圈 □Breaching 擊浪
□ Spy - hopping 窺探 □Porpoishing 躍浪 □Other Beh	
Identified Individual(s) 已識別個體	
Other Comments 其他	4
	DP 1H Y
Observer Signa	ture海豚觀察員簽名: <u>不下 分子 亮</u> 云
Piling Supervisor Sig	nature 打椿科文签名:
Piling Supervisor Sig	nature 打椿科文簽名:

	DOLPHIN / PORPOISE SIG	HTING SHEET	
Dolphin Observer 觀察員 <u>らこり入りそれ</u>	?	Sighting No. 觀察記錄編號24	
Date 日期24/(の	ord at Initial Piling) 打樁前記錄	09:00 ¥ 18:0	0
	noculars 望遠鏡 🗹 Compas 雀 (metres 米) (子の、 うくの		
Sighting Angle 觀祭用度() Sighting Position 觀察位置	Piling Barge (HKGrid: N	12636 Longitude/Latitude Efe	207)
	Sunny 天晴 □ Rain 雨天 □ □ 0 □ 1 □ 2 □ 3] Overcast 陰天 🗌 Others 其它 □ 4 🛛 5 🗌 6 🗌 7+	
Percussive Piling interruptio	□Yes 有	至	_
LOW PRIORITY DATA (Recor	d During or After Piling) 打樁中	或後期記錄	
Percussive Piling interruption		至	_
Percussive Piling interruption Survey Area 出沒地點 Species 品種 □ Humpba	n Time 停工時間 由 ck Dolphin 駝背豚 □ Finless Po	orpoise 江豚 囗 Others 其它	
Percussive Piling interruption Survey Area 出没地點 Species 品種 □ Humpba Group Size 群組 Best 很	n Time 停工時間 由 ck Dolphin 駝背豚 □ Finless Po 多 High 多	orpoise 江豚 囗 Others 其它 Low 少	
Percussive Piling interruption Survey Area 出沒地點 Species 品種 □ Humpba Group Size 群組 Best 很多 CWD Group Composition	n Time 停工時間 由 ck Dolphin 駝背豚 □ Finless Po 多 High 多 UC 初生海豚	orpoise 江豚 〇 Others 其它 Low 少 UJ 無斑點小海豚	
Percussive Piling interruption Survey Area 出沒地點 Species 品種 □ Humpba Group Size 群組 Best 很多 CWD Group Composition	n Time 停工時間 由 ck Dolphin 駝背豚 □ Finless Po 多 High 多 _ UC 初生海豚 SJ 斑點小海豚	orpoise 江豚 〇 Others 其它 Low 少 UJ 無斑點小海豚 SS 斑點年青海豚	
Percussive Piling interruption Survey Area 出沒地點 Species 品種 □ Humpba Group Size 群組 Best 很 CWD Group Composition 群組構成	n Time 停工時間 由 ck Dolphin 駝背豚 □ Finless Po 多 High 多 _ UC 初生海豚 SJ 斑點小海豚	orpoise 江豚 [] Others 其它 Low 少 UJ 無斑點小海豚 SS 斑點年青海豚 UA 無斑點成年海豚	
Percussive Piling interruption Survey Area 出沒地點 Species 品種 □ Humpba Group Size 群組 Best 很 CWD Group Composition 群組構成 FP Group Composition 群組構 BEHAVIOUR 行爲/ COMME □Feeding 覓食 □Socializin □ Spy - hopping 窺探 □Por Identified Individual(s) 已識)	n Time 停工時間 由 ck Dolphin 駝背豚 □ Finless Po 多 High 多 _ UC 初生海豚 SJ 斑點小海豚 SA 斑點成年海豚 構成 Claves 初生海豚 NTS 評註 g 群聚 □Travelling 游動 □Mill rpoishing 躍浪 □Other Behavior 別個體	orpoise 江豚 □ Others 其它 Low 少 UJ 無斑點小海豚 SS 斑點年青海豚 UA 無斑點成年海豚 Adults 成年海豚 ing/Resulting 成群兜圈 □Breaching or 其他行爲	 g 擊浪
Percussive Piling interruption Survey Area 出沒地點 Species 品種 □ Humpba Group Size 群組 Best 很 CWD Group Composition 群組構成 FP Group Composition 群組構 BEHAVIOUR 行爲/ COMME □Feeding 覓食 □Socializin □ Spy - hopping 窺探 □Por Identified Individual(s) 已識)	n Time 停工時間 由 ck Dolphin 駝背豚 □ Finless Po 多 High 多 _ UC 初生海豚 SJ 斑點小海豚 SA 斑點成年海豚 構成 Claves 初生海豚 NTS 評註 g 群聚 □Travelling 游動 □Mill rpoishing 躍浪 □Other Behaviou	prpoise 江豚 □ Others 其它 Low 少 UJ 無斑點小海豚 SS 斑點年青海豚 UA 無斑點成年海豚 Adults 成年海豚 ing/Resulting 成群兜圈 □Breaching III 其他行為	 g 擊浪

	DOLPHIN / PORPO	ISE SIGHTING SHEET		
Dolphin Observer	00	Sig	ghting No.	-
觀察員 56920	<u>17</u>	觀察	記錄編號	(2)
	cord at Initial Piling) 打樁 <u>~200</u> Time 時間		至	(F=00
Equipment 儀器 🛛 🗹	Binoculars 望遠鏡	Compass 指南針	·	
Sighting Distance 觀察距	·離 (metres 米) 5	m至(つ	o m	
Sighting Angle 觀察角度	() (fo · 3)	40 .		
Sighting Position 觀察位	置 <u>Piling Barge</u> (H	KGrid: <u>NJ26366</u> Lon	rgitude/Latitad	leEfo(20])
Weather Condition 天氣	☑ Sunny 天晴 □ Rain	雨天 🗌 Overcast 陰	天 🗌 Others :	其它
Beaufort 風級		3 4 5		
Dolphin Found 海豚行蹤	□Yes 有 □√No i	沒有		
Percussive Piling interrupt	tion Time 停工時間 由		至	
Survey Area 出沒地點				
Percussive Piling interrupt	□ Yes 有 ☑ No ¾ ion Time 停工時間 由		至	
Species 品種 🗌 Hump	back Dolphin 駝背豚 囗 F	inless Porpoise 江豚	Others 其	它
Group Size 群組 Best 彳	很多 Hi	sh 多	Low 少	
CWD Group Composition	UC 初生海豚	UJ 無	斑點小海豚 _	
群組構成	SJ 斑點小海豚	SS 斑	點年青海豚	
	SA 斑點成年海豚	UA	斑點成年海朋	豕
FP Group Composition 群約	組構成 Claves 初生海豚	Adult	s成年海豚	
BEHAVIOUR 行爲/ COMN	MENTS 評註			
	zing 群聚 □Travelling 游動	Milling/Resulting	成群兜圈 🗍	Sreaching 趣涼
	Porpoishing 躍浪 □Other E			
	識別個體			
Other Comments 其他				
	Observer Sig	nature 海豚觀察員簽	名: fh	佛苑
	Piling Supervisor S	iignature 打樁科文簽	名:	¥

Appendix C Construction Phase - Environmental Mitigation Implementation Schedule

Legends:

Ref.	Environmental Protection Measures	Environmental Protection Measures Location/Duration of Implementation Measures/Timing of Agent Completion of Measures	Implementation	Implemen	ntation Stage	Implementation Status during
			Agent	Design	Construction	the reporting month
Air Qual	ity			I		
EIA S3.6.1	• The area at which demolition work takes place should be sprayed with water prior to, during and immediately after the demolition activities so as to maintain the entire surface wet	Within the construction site/Throughout the construction period	Contractor		~	С
EIA S3.6.1	• Dust screens or sheeting should be provided to enclose the structure to be demolished to a height of at least 1 m higher than the highest level of the structure;	Within the construction site/Throughout the construction period	Contractor		•	С
EIA \$3.6.1	• Any dusty materials should be wetted with water to avoid any fugitive dust emission;	Within the construction site/Throughout the construction period	Contractor		✓	С
EIA S3.6.1	• All temporary stockpiles should be wetted or covered by tarpaulin sheet to prevent fugitive emissions;	Within the construction site/Throughout the construction period	Contractor		✓	С
EIA \$3.6.1	• All the dusty areas and roads should be wetted with water;	Within the construction site/Throughout the construction period	Contractor		✓	С
EIA \$3.6.1	• All the dusty materials transported by lorries should be covered entirely by impervious sheet to avoid any leakage; and	Within the construction site/Throughout the construction period	Contractor		✓	С
EIA S3.6.1	• The falling height of fill materials should be controlled.	Within the construction site/Throughout the construction period	Contractor		✓	С

Ref.	Environmental Protection Measures	Location/Duration of	Implementation	Implemen	tation Stage	Implementation Status during
		Measures/Timing of Completion of Measures	Agent	Design	Construction	the reporting month
EP Con 2.14, EIA S5.8.1	• Silt curtains should be deployed around the closed grab dredger to contain suspended solids within the construction site during dredging.	Within the construction site/Throughout the construction period	Contractor		v	N/A
EP Cons 2.13 & 2.15, EIA S5.8.1	• A daily dredging rate of a closed grab dredger (with a minimum grab size of 8 m ³) should be less than 5,200 m ³ day ⁻¹ , with reference to the maximum rate for dredging, which was derived in the EIA.	Within the construction site/Throughout the construction period	Contractor		×	N/A
EP Con 2.16, EIA S5.8.1	• Barges or hoppers should have tight fitting seals to their bottom openings to prevent leakage of material.	Within the construction site/Throughout the construction period	Contractor		1	N/A
EP Con 2.9	• Any groundwater arising from the decommissioning and construction of the Project shall be collected and recharged back to the site of the Project. No groundwater shall be used for any industrial or domestic purposes.	Within the construction site/Throughout the construction period	Contractor		×	С
EP Con 2.10	• All wastewater or effluent arising from the stockpiling, transportation and treatment of the excavated contaminated materials shall be properly collected and treated.	Within the construction site/Throughout the construction period	Contractor		•	С
EP Con 2.11	• Surface run-off from the construction site shall be directed into sand/silt removal facilities such as sand/silt traps and sediment basins before discharge. The sand/silt removal facilities shall be adequately designed and properly operated and maintained.	Within the construction site/Throughout the construction period	Contractor		4	С
EP Con 2.12, EIA S5.8.2	• All exposed earth areas should be completed as soon as possible after earthworks have been completed, or alternatively, within 14 days of the cessation of earthworks, where practicable. If excavation of soil cannot be avoided during the rainy season, or at any time of year when rainstorms are likely, exposed slope surfaces should be covered by tarpaulin or by other means.	Within the construction site/Throughout the construction period	Contractor		¥	С
EIA S5.8.1	• Mechanical grabs should be designed and maintained to avoid spillage and should seal tightly while being lifted.	Within the construction site/Throughout the construction period	Contractor		~	N/A

Ref.	Environmental Protection Measures	Location/Duration of	Implementation	Implemen	tation Stage	Implementation Status during
		Measures/Timing of Completion of Measures	Agent	Design	Construction	the reporting month
EIA \$5.8.1	• Loading of barges or hoppers should be controlled to prevent splashing of dredged material to the surrounding water.	Within the construction site/Throughout the construction period	Contractor		v	N/A
EIA S5.8.1	• Barges or hoppers should not be filled to a level which will cause overflow of materials or pollution of water during loading or transportation.	Within the construction site/Throughout the construction period	Contractor		•	N/A
EIA S5.8.1	• Excess material should be cleaned from the decks and exposed fittings of barges or hoppers before the vessel is moved.	Within the construction site/Throughout the construction period	Contractor		×	N/A
EIA S5.8.1	• Adequate freeboard should be maintained on barges to reduce the likelihood of decks being washed by wave action.	Within the construction site/Throughout the construction period	Contractor		1	N/A
EIA S5.8.1	• All vessels should be sized such that adequate clearance is maintained between vessels and the seabed at all states of the tide to ensure that undue turbidity is not generated by turbulence from vessel movement or propeller wash.	Within the construction site/Throughout the construction period	Contractor		×	N/A
EIA S5.8.1	• The works should not cause foam, oil, grease, litter or other objectionable matter to be present in the water within and adjacent to the works site.	Within the construction site/Throughout the construction period	Contractor		•	N/A
EIA S5.8.2	• At the start of site establishment, perimeter cut-off drains to direct off-site water around the site should be constructed and internal drainage works and erosion and sedimentation control facilities implemented. Channels, earth bunds or sand bag barriers should be provided on site to direct stormwater to silt removal facilities. The design of efficient silt removal facilities should be based on the guidelines in <i>Appendix A1</i> of <i>ProPECC PN 1/94</i> .	Within the construction site/Throughout the construction period	Contractor		*	С
EIA S5.8.2	• All the surface runoff or extracted ground water contaminated by silt and suspended solids should be collected by the on-site drainage system and diverted through the silt traps prior to discharge into storm drain.	Within the construction site/Throughout the construction period	Contractor		4	С

Ref.	Environmental Protection Measures	Location/Duration of	Implementation	Implemen	ntation Stage	Implementation Status during
		Measures/Timing of Completion of Measures	Agent	Design	Construction	the reporting month
EIA S5.8.2	• All drainage facilities and erosion and sediment control structures should be regularly inspected and maintained to ensure proper and efficient operation at all times and particularly following rainstorms. Deposited silt and grit should be removed regularly and disposed of by spreading evenly over stable, vegetated areas.	Within the construction site/Throughout the construction period	Contractor		*	С
EIA S5.8.2	• Measures should be taken to reduce the ingress of site drainage into excavations. If the excavation of trenches in wet periods is necessary, they should be dug and backfilled in short sections wherever practicable. Water pumped out from trenches or foundation excavations should be discharged into storm drains via silt removal facilities.	Within the construction site/Throughout the construction period	Contractor		~	С
EIA S5.8.2	• Open stockpiles of construction materials (for example, aggregates, sand and fill material) of more than 50 m ³ should be covered with tarpaulin or similar fabric during rainstorms. Measures should be taken to prevent the washing away of construction materials, soil, silt or debris into any drainage system.	Within the construction site/Throughout the construction period	Contractor		*	С
EIA S5.8.2	• Manholes (including newly constructed ones) should always be adequately covered and temporarily sealed so as to prevent silt, construction materials or debris being washed into the drainage system.	Within the construction site/Throughout the construction period	Contractor		•	С
EIA S5.8.2	• Precautions to be taken at any time of year when rainstorms are likely, actions to be taken when a rainstorm is imminent or forecasted, and actions to be taken during or after rainstorms are summarised in <i>Appendix A2</i> of <i>ProPECC PN 1/94</i> . Particular attention should be paid to the control of silty surface runoff during storm events, especially for areas located near steep slopes.	Within the construction site/Throughout the construction period	Contractor		•	С

Ref.	Environmental Protection Measures	Location/Duration of	Implementation	Implemen	tation Stage	Implementation Status during
		Measures/Timing of Completion of Measures	Agent	Design	Construction	the reporting month
EIA S5.8.2	• Oil interceptors should be provided in the drainage system and regularly emptied to prevent the release of oil and grease into the storm water drainage system after accidental spillages. The interceptor should have a bypass to prevent flushing during periods of heavy rain.	Within the construction site/Throughout the construction period	Contractor		1	N/A
EIA S5.8.2	• All temporary and permanent drainage pipes and culverts provided to facilitate runoff discharge should be adequately designed for the controlled release of storm flows. All sediment traps should be regularly cleaned and maintained. The temporary diverted drainage should be reinstated to the original condition when the construction work has finished or the temporary diversion is no longer required.	Within the construction site/Throughout the construction period	Contractor		×	С
EIA S5.8.2	• Sewage from toilets should be collected by a licensed waste collector.	Within the construction site/Throughout the construction period	Contractor		1	С
EIA S5.8.2	• Vehicle and plant servicing areas, vehicle wash bays and lubrication bays should, as far as possible, be located within roofed areas. The drainage in these covered areas should be connected to foul sewers via a petrol interceptor.	Within the construction site/Throughout the construction period	Contractor		*	С
EIA S5.8.2	• Oil leakage or spillage should be contained and cleaned up immediately. Waste oil should be collected and stored for recycling or disposal, in accordance with the <i>Waste Disposal Ordinance</i> .	Within the construction site/Throughout the construction period	Contractor		•	С
EIA S5.8.2	• Waste streams classifiable as chemical wastes should be properly stored, collected and treated for compliance with <i>Waste Disposal Ordinance</i> or <i>Disposal (Chemical Waste) (General) Regulation</i> requirements.	Within the construction site/Throughout the construction period	Contractor		1	С
EIA S5.8.2	• The storage areas should be surrounded by bunds with a capacity equal to 110% of the storage capacity of the largest tank to prevent spilled oil, fuel and chemicals from reaching the receiving waters.	Within the construction site/Throughout the construction period	Contractor		•	С

Ref.	Environmental Protection Measures	Location/Duration of	Implementation	Implemen	tation Stage	Implementation Status during
		Measures/Timing of Completion of Measures	Agent	Design	Construction	the reporting month
EIA S5.8.2	• The Contractors should prepare guidelines and procedures for immediate clean-up actions following any spillages of oil, fuel or chemicals.	Within the construction site/Throughout the construction period	Contractor		•	С
EIA S5.8.2	• Surface run-off from bunded areas should pass through oil/grease traps prior to discharge to the stormwater system.	Within the construction site/Throughout the construction period	Contractor		×	N/A
Waste Ma	nagement	·				
EP Con 2.19	No wastes, spoil or excavated materials or materials alike arising from the demolition and/or decommissioning and construction works of the Project shall be dumped in any environmentally sensitive areas, including but not limited to Sites of Special Scientific Interest, coastal protection areas, conservation areas and agricultural land.	Within the construction site/Throughout the construction period	Contractor		¥	С
EIA S6.6.1	Dredged sediments should be disposed of only at designated disposal sites allocated by the Marine Fill Committee (MFC) based on the findings of further sediment quality tests. A dumping licence should also be obtained from EPD prior to the commencement of the dredging works.	Within designated disposal site/prior to commencement of the dredging works	Contractor		*	N/A
EIA S6.6.1	 Regardless of the disposal method and site, the Contractor should: Dredge the sediments using closed grabs; Use split barges of not less than 750 m³ capacity when transporting the sediment to the disposal site; Regularly maintain the barge hoppers to ensure that they are capable of rapid opening and discharge at the designated disposal site; and Monitor the barge load against loss of materials during transportation. 	Within the dredging area /Throughout the dredging works period	Contractor		*	N/A

Ref.	Measures/Timing of Agent		. •	Implementation Stage		Implementation Status during the reporting month
		Design	Construction	the reporting month		
EIA S6.6.3	The contractor should open a billing account with EPD in accordance with the <i>Waste Disposal (Charges for Disposal of Construction Waste)</i> <i>Regulation</i> for the payment of disposal charges. Every waste load transferred to government waste disposal facilities such as public fill, sorting facilities, landfills or transfer station would required a valid "chit" which contain the information of the account holder to facilitate waste transaction recording and billing to the waste producer. A trip- ticket system should also be established in accordance with <i>Works</i> <i>Bureau Technical Circular No. 21/2002</i> to monitor the disposal of solid wastes at transfer station/landfills, and to control fly-tipping. The billing "chit" and trip-ticket system should be included as one of the contractual requirements and implemented by the contractor.		Contractor		•	C
EIA S6.6.3	A recording system for the amount of waste generated, recycled and disposed of (including the disposal sites) should be established during the construction stage.	Within the construction site/Throughout the construction period	Contractor		1	С

Ref.	Environmental Protection Measures	Location/Duration of	Implementation	Implementation Stage		Implementation Status during						
		Measures/Timing of Completion of Measures	Agent	Design	Construction	the reporting month						
EIA S6.6.3	Measures for the Reduction of C&DM Generation during Planning and Design Stages	Within the construction Consite/Throughout the construction period	Contractor	✓		С						
TI pr be	The various waste management options can be categorized in terms of preference from an environmental viewpoint. The options considered to be more preferable have the least impacts and are more sustainable in the long term. Hence, the waste management hierarchy is as follows:	construction period										
	• Avoidance and minimization, that is, reduction of waste generation through changing or improving practices and design;											
	• Reuse of materials, thus avoiding disposal (generally with only limited reprocessing);											
	• Recovery and recycling, thus avoiding disposal (although reprocessing may be required); and											
	• Treatment and disposal, according to relevant law, regulations, guidelines and good practice.											
	This hierarchy should be used to evaluate the waste management options, thus allowing maximum waste reduction and reduced disposal costs. Records of quantities of wastes generated, recycled and disposed (locations) should be kept.											

Ref.	Environmental Protection Measures	Location/Duration of	Implementation	Implementa	tion Stage	Implementation Status during	
		Measures/Timing of Completion of Measures	Agent	Design	Construction	the reporting month	
EIA S6.6.3	 Measures for the Reduction of C&DM Generation during Construction C&D materials will be reused as far as possible within the Project. Public fill and construction waste should be segregated and stored in different containers or skips to facilitate reuse or recycling of materials and their proper disposal of construction waste. Specific areas of the work site should be designated for such segregation and temporary storage if immediate use is not practicable. 	Within the construction site/Throughout the construction period	Contractor		*	С	
	• The construction waste should be collected by Contractor and transported to landfills for disposal.						
	• The use of wooden hoardings should not be allowed. An alternative material, which can be reused or recycled, for example, metal (aluminium, alloy, etc) should be used.						
	• To reduce the potential dust impact, C&D materials should be wetted as quickly as possible during excavation works.						
EIA S6.6.4	 Containers used for storage of chemical wastes should: be suitable for the substance they are holding, resistant to corrosion, maintained in a good condition, and securely closed; have a capacity of less than 450 L unless the specifications have been approved by the EPD; and 	Within the construction site/Throughout the construction period	Contractor		×	С	
	• display a label in English and Chinese in accordance with instructions prescribed in <i>Schedule 2</i> of the <i>Regulations</i>						

Ref.	Environmental Protection Measures	Location/Duration of Measures/Timing of Completion of Measures	Implementation Agent	Implementation Stage		Implementation Status during
				Design	Construction	the reporting month
EIA S6.6.4	 The storage area for chemical wastes should: be clearly labelled and used solely for the storage of chemical waste; be enclosed on at least 3 sides; have an impermeable floor and bunding, of capacity to accommodate 110% of the volume of the largest container or 20% by volume of the chemical waste stored in that area, whichever is the greatest; have adequate ventilation; be covered to prevent rainfall entering (water collected within the bund must be tested and disposed of as chemical waste, if necessary); and be arranged so that incompatible materials are appropriately separated. 	Within the construction site/Throughout the construction period	Contractor		*	C
EIA S6.6.4	 Disposal of chemical waste should be: via a licensed waste collector; and to a facility licensed to receive chemical waste, such as the Chemical Waste Treatment Facility which also offers a chemical waste collection service and can supply the necessary storage containers 	Within the construction site/Throughout the construction period	Contractor		*	С
EIA S6.6.5	The sewage sludge from the portable toilet should be collected by a reputable collector on a regular basic.	Within the construction site/Throughout the construction period	Contractor		4	С
EIA S6.6.6	General refuse should be stored in enclosed bins or compaction units separately from construction and chemical wastes.	Within the construction site/Throughout the construction period	Contractor		×	С
EIA S6.6.6	General refuse should be removed from the site, separately from construction and chemical wastes, on a daily basis to minimise odour, pest and litter impacts.	Within the construction site/Throughout the construction period	Contractor		×	С

Ref.	Environmental Protection Measures	Location/Duration of Measures/Timing of Completion of Measures	Implementation Agent	Implementation Stage		Implementation Status during
				Design	Construction	the reporting month
EIA S6.6.6	Burning of refuse on construction site is prohibited by law.	Within the construction site/Throughout the construction period	Contractor		×	С
EIA S6.6.6	Aluminium cans are often recovered from the waste stream by individual collectors if they are segregated and made easily accessible. As such, separate, labelled bins for their deposit should be provided if feasible. Materials recovered will be re-used on site or sold for recycling.	Within the construction site/Throughout the construction period	Contractor		✓	С
EIA S6.6.7	Training should be provided to workers on the concepts of site cleanliness and on appropriate waste management procedures, including waste reduction, reuse and recycling at the beginning of the Contract.	Within the construction site/Throughout the construction period	Contractor		1	С
Land Cont	amination			•		
EP Con 2.5	The oil tanks shall be properly cleaned before their demolition. All wastes and effluent arising from the cleaning of the oil tanks shall be properly collected, stored, treated and disposed of.	Within the contaminated area /Throughout the construction period	Contractor		✓	N/A
EP Con 2.6	No contaminated soil arising from the demolition and/or decommissioning works shall be stockpiled, treated or disposed of outside the Castle Peak Power Station.	Within the contaminated area /Throughout the construction period	Contractor		v	N/A
EP Con 2.7	The excavated soil arising from the demolition and/or decommissioning works shall be properly contained in container(s) during storage and transportation to avoid any discharge or leakage.	Within the contaminated area /Throughout the construction period	Contractor		✓	N/A
EP Con 2.8	The contaminated soil arising from the demolition and/or decommissioning works shall be decontaminated within the Castle Peak Power Station in accordance with the Land Contamination Remediation Action Plan contained in the EIA report (Register No. AEIAR- 102/2006). Bio-remediation methods shall be used to remedy the petroleum hydrocarbon contamination in the excavated materials.	Within the contaminated area /Throughout the construction period	Contractor		*	N/A
EIA Annex E	Potentially contaminated soil should be treated in accordance with the remediation actions specified in the Remediation Action Plan (RAP) of this EIA Report and the treated soil should be reused within the Project Site as far as possible.	Within the contaminated area /Throughout the construction period	Contractor		×	N/A

Ref.	Environmental Protection Measures	Location/Duration of Measures/Timing of Completion of Measures	Implementation Agent	Implementation Stage		Implementation Status during
				Design	Construction	the reporting month
EIA Annex E	The temporary stockpile of excavated potentially contaminated materials should be contained in a container covered by HDPE sheet on top	Within the contaminated area /Throughout the construction period	Contractor		×	N/A
EIA Annex E	Bioremediation by applying nutrient to the soil should be employed for the on-site treatment of excavated materials potentially contaminated by TPH.	Within the contaminated area /Throughout the construction period	Contractor		1	N/A
EIA Annex E	If disposal of the treated excavated soil to the public fill bank is required, vehicles containing any excavated materials should be suitably covered to limit potential dust emissions or wastewater run-off, and truck bodies and tailgates will be sealed to minimise the risk of a discharge during transportation or during wet conditions.	Within the contaminated area /Throughout the construction period	Contractor		¥	N/A
EIA Annex E	Records of the quantities of soil generated for off-site disposal will be maintained.	Within the contaminated area /Throughout the construction period	Contractor		1	С
EP Con 2.9, EIA Annex E	As groundwater is not used for either domestic or industrial purposes at the site or in the adjacent areas, remediation of groundwater is not considered to be necessary for the Project to proceed. If groundwater is encountered during the construction of foundations, the groundwater abstracted or collected will be recharged back to the site.	Within the contaminated area /Throughout the construction period	Contractor		4	С
EIA Annex E	The FODT and the oil separator serving it should be cleaned prior to demolition.	Within the contaminated area /Throughout the construction period	Contractor		1	N/A
EIA Annex E	Oily water and sludge collected from the cleaning should be treated at the on-site wastewater treatment facility. Oily water and sludge collected from the cleaning should be collected and disposed of as chemical waste at Government chemical waste treatment facility.	Within the contaminated area /Throughout the construction period	Contractor		✓	N/A
EIA Annex E	Only licensed waste contractors should be used to collect and transport any chemical waste. The necessary waste disposal permits will be obtained, as required, from the appropriate authorities, in accordance with the <i>Waste Disposal Ordinance (Cap 354)</i> and <i>Waste Disposal</i> <i>(Chemical Waste) (General) Regulation (Cap 354C)</i> , as required.	Within the contaminated area /Throughout the construction period	Contractor		¥	С

Ref.	Environmental Protection Measures	Location/Duration of Measures/Timing of Completion of Measures	Implementation Agent	Implementation Stage		Implementation Status during
				Design	Construction	the reporting month
EIA Annex E	Prior to commence any remediation work, a health and safety risk assessment should be performed for the remediation work to identify potential work related hazards and prepare appropriate control measures.	Within the contaminated area /Throughout the construction period	Contractor		✓	N/A
EIA Annex E	Appropriate Personal Protective Equipment (PPE) such as safety hat, chemical protective gloves, masks (for both dust and vapour), eye goggles, protective clothing and protective footwear should be provided to staff who would be involved in the tank cleaning and contaminated area (FODT and TP3) remediation works. No works should be allowed without the suitable PPE.	Within the contaminated area /Throughout the construction period	Contractor		¥	N/A
EIA Annex E	The workers should inspect and check their PPE before, during and after use. In cases where any of the PPE is impaired, the workers should stop work immediately and inform their supervisor. The workers should not be allowed to re-start their work until the impaired PPE is replaced.	Within the contaminated area /Throughout the construction period	Contractor		×	N/A
EIA Annex E	The workers should always maintain basic hygiene standard (e.g. hand wash before leaving the contaminated work area). The workers should also be responsible for cleaning and storing their own PPE in a secure place before leaving the site.	Within the contaminated area /Throughout the construction period	Contractor		×	N/A
EIA Annex E	Eating, drinking and smoking should be strictly prohibited within the contaminated site area.	Within the contaminated area /Throughout the construction period	Contractor		v	N/A
EIA Annex E	The designated site management representatives must be informed if any workers feel uncomfortable physically or mentally during the remediation works. All workers should leave the work areas and the work should be temporarily suspended until the reason for the uncomfortable feeling has been identified.	Within the contaminated area /Throughout the construction period	Contractor		1	N/A
EIA Annex E	The works should be stopped or discontinued when Typhoon Signal No. 3 or Rainstorm Warning signals are hoisted. All stockpile materials (if any) should be covered immediately by tarpaulin or other similar protective and waterproof materials.	Within the contaminated area /Throughout the construction period	Contractor		×	N/A
EIA Annex E	Bulk earth-moving excavator equipment should be used to minimise construction workers' potential contact with contaminated materials.	Within the contaminated area /Throughout the construction period	Contractor		√	N/A

Ref.	Environmental Protection Measures	Location/Duration of Measures/Timing of Completion of Measures	Implementation Agent	Implementation Stage		Implementation Status during
				Design	Construction	the reporting month
Ecological	– Marine Mammal	·				·
EP Con 2.17, EIA S8.9	 To limit potential impacts to cetaceans from underwater percussive piling, the following steps should be taken: Only hydraulic hammers should be used; An exclusion zone of 500 m radius should be scanned around the work area for at least 30 minutes prior to the start of piling. If cetaceans are observed in the exclusion zone, piling should be delayed until they have left the area; and, 	Within the dredging area /Throughout the construction period	Contractor		~	C
	 Acoustic decoupling of noisy equipment on work barges should be undertaken. These techniques include the use of a soft sling to retain the pile driving hammer, rubber tyred air compressor for bubble jacket/curtain, rubber pads on barge leaders and guides, and an air curtain around the pile barge. 					
EP Con 2.18	To minimize potential construction and operation impacts on dolphins and porpoises, no dumping of rubbish, food, oil, or chemicals from the marine vessels shall be allowed.	Within the dredging area /Throughout the construction period	Contractor		✓	С
EIA S8.9	 The following recommendations should be considered to minimize potential construction impacts on dolphins and porpoises. All vessel operators working on the Project construction should be given a briefing, alerting them to the possible presence of dolphins in the area, and the guidelines for safe vessel operation in the presence of cetaceans. If high speed vessels are used, they should be required to slow to 10 knots when passing through a high density dolphin area (west Lantau, Sha Chau and Lung Kwu Chau); The vessel operators should be required to use predefined and regular routes, as these will become known to dolphins using these waters; The vessel operators should be required to control and manage all 	Within the marine works area /Throughout the construction period of the additional berthing facility	Contractor / CLP Power (as CAPCO operator)		✓	C
	effluent from vessels;A policy of no dumping of rubbish, food, oil, or chemicals should be					

Ref.	Environmental Protection Measures	Location/Duration of	Implementation Agent	Implementation Stage		Implementation Status during
		Measures/Timing of Completion of Measures		Design	Construction	the reporting month
	 strictly enforced. This should also be covered in the contractor briefings; Every attempt should be made to minimize the effects of construction of the Project on the water quality of the area; 					
\$9.3.5	The new structures associated with the Project, including those of the additional conveyor systems, should be painted in a colour scheme that complements the surrounding industrial setting of the existing CPPS.	New structures associated with the Project	Contractor		✓	С