

PROJECT No.: TCS00409/08



DSD CONTRACT NO. DC/2007/08  
DRAINAGE IMPROVEMENTS WORKS IN TAI PO TIN,  
PING CHE, MAN UK PIN AND LIN MA HANG

5<sup>TH</sup> MONTHLY ENVIRONMENTAL MONITORING &  
AUDIT REPORT FOR THE DESIGNATED WORKS UNDER  
THE PROJECT – JULY 2009  
CHANNELS MUP03A&B, MUP04A&B, MUP05 AND  
LMH01

PREPARED FOR

CHIU HING CONSTRUCTION & TRANSPORTATION COMPANY  
LIMITED

**Quality Index**

Date	Reference No.	Prepared By	Certified by
13 August 2009	TCS00409/08/600/R0496v2	 Nicola Hon Environmental Consultant	 Andrew Lau Environmental Team Leader

Version	Date	Prepared By	Certified By	Remarks
1	10 August 2009	Nicola Hon	Andrew Lau	First Submission
2	13 August 2009	Nicola Hon	Andrew Lau	Amended against IEC's comments received on 12 August 2009

This report has been prepared by Action-United Environmental Services & Consulting with all reasonable skill, care and diligence within the terms of the Agreement with the client, incorporating our General Terms and Conditions of Business and taking account of the resources devoted to it by agreement with the client. We disclaim any responsibility to the client and others in respect of any matters outside the scope of the above. This report is confidential to the client and we accept no responsibility of whatsoever nature to third parties to whom this report, or any part thereof, is made known. Any such party relies upon the report at their own risk.

**ENVIRON**

Ref.: DSDFANLGEM01\_0\_0437L.09

13 August 2009

By Fax (26598323) and By Post

Engineer's Representative Office  
Black & Veatch Hong Kong Ltd  
503 Tai Po Tin, Ta Kwu Ling  
Fanling, New Territories

Attention: Mr. Terry Siu

Dear Mr. Siu,

**Re: Contract No. DC/2007/08 (EP No. EP-277/2007)  
Drainage Improvement Works at Tai Po Tin, Ping Che,  
Man Uk and Lin Ma Hang  
Monthly EM&A Report for Channels MUP03A&B, MUP04A&B, MUP05 and  
LMH01 for July 2009 (Rev. 2)**

With reference to the 5<sup>th</sup> Monthly EM&A Report (July 2009, Rev. 2) for the Designated Project Channels MUP03A&B, MUP04A&B, MUP05 and LMH01 forwarded by the Environmental Team through email on 13 August 2009.

We would like to inform that we have no comment on the captioned report.

Please also note that the Monthly EM&A Report had been verified in accordance with the Condition 3.4 of the Environmental Permit No. EP-277/2007.

Thank you very much for your kind attention and please do not hesitate to contact the undersigned should you have any queries.

Yours sincerely,



David Yeung  
Independent Environmental Checker

c.c. AUES

Attn: Mr. Andrew Lau

Fax: 29596079

Q:\Projects\DSDFANLGEM01\Corr\DSDFANLGEM01\_0\_0437L.09.doc

EXECUTIVE SUMMARY

- ES.01 This is the 5<sup>th</sup> monthly EM&A Report for Channels MUP03A&B, MUP04A&B, MUP05 and LMH01 covering a period from **26 June 2009 to 25 July 2009** (the Reporting Period). These works are classified as Designated Projects under the Environmental Impact Assessment Ordinance (Cap. 499) and Environmental Permit No.EP277/2007.
- ES.02 As construction works are undertaken only at Channels MUP03A&B, MUP04A&B, MUP05 during the Reporting Period, environmental monitoring of air quality, construction noise, water quality and ecology was therefore performed at those channels only.
- ES.03 The monitored results of air quality and construction noise demonstrated were in full compliance with the environmental quality criteria. However, 21 exceedances of stream water quality (Action/Limit Levels) were recorded, which included 2 Limit Level exceedances of dissolved oxygen (DO), 6 Action/ Limit Level exceedances in turbidity, and 13 Action/Limit Level exceedances in suspended solids (SS). Based on the investigation reports, all exceedances were considered not related to the works of the Project. No associated corrective actions were therefore required.

Station	DO		Turbidity		pH Value		SS		Total Exceedance	
	Action	Limit	Action	Limit	Action	Limit	Action	Limit	Action	Limit
MUP-W4 <sup>(a)</sup>	0	0	1	0	0	0	0	1	1	1
MUP-W5 <sup>(b)</sup>	0	1	0	3	0	0	0	4	0	8
MUP-W6 <sup>(b)</sup>	0	1	0	2	0	0	3	5	3	8
No of Exceedances	0	2	1	5	0	0	3	10	4	17

Remarks: <sup>(a)</sup> impact station; <sup>(b)</sup> Temporary or mobile station

- ES.04 **Four** ecological general audits were performed in this reporting month at the nominated construction channel (MUP05). No major ground moving activities that would have any significant impact to the ecological condition of the project stream has been carried out during the reporting month.
- ES.05 No written or verbal complaint, notification of summons or successful prosecution was received (written or verbal) for each media during the Reporting Period. No adverse environmental impacts were observed during the weekly site inspection and environmental audit which indicated that the implemented mitigation measures for air quality, construction noise, water quality and ecology were effective. Minor deficiencies found during the weekly site inspection were in general rectified within the specified deadlines. The environmental performance of the Project was therefore considered satisfactory.
- ES.06 Due to the coming excavation works of the channels, ingress of surface runoff into the river within MUP Channels continues to be the key issue in future months. Mitigation measures for water quality and ecology should therefore be fully implemented.
- ES.07 In addition, attention should also be paid to dust emission and noise impact during the construction work progress, and with other environmental issues identified in the EM&A Manual. Mitigation measures recommended in the Environmental Study Report (ESR) and summarized in Mitigation Measure Implementation Schedule should continually be applied.

<b>TABLE OF CONTENTS</b>		<b>PAGE</b>
<b>1.</b>	<b>INTRODUCTION</b>	<b>- 1 -</b>
1.1	Report Structure	- 1 -
<b>2.</b>	<b>BASIC PROJECT INFORMATION</b>	<b>- 2 -</b>
2.1	Project Organization	- 2 -
2.2	Master Construction Program for the Project	- 2 -
2.3	Works Undertaken During the Reporting Month	- 2 -
<b>3.</b>	<b>ENVIRONMENTAL STATUS</b>	<b>- 3 -</b>
3.1	Work Undertaken during the Month with Illustrations	- 3 -
3.2	Implementation of Environmental Protection and Pollution Control	- 3 -
<b>4.</b>	<b>SUMMARY OF IMPACT MONITORING REQUIREMENTS</b>	<b>- 4 -</b>
4.1	Monitoring Parameters	- 4 -
4.2	Monitoring Locations	- 4 -
4.3	Monitoring Frequency	- 5 -
4.4	Monitoring Equipment	- 6 -
4.5	Monitoring Procedure	- 7 -
4.6	Environmental Quality Performance Limits	- 9 -
4.7	Event and Action Plans	- 10 -
4.8	Environmental Mitigation Measures	- 11 -
4.9	Data Management and Data QA/QC Control	- 11 -
<b>5.</b>	<b>IMPACT MONITORING RESULTS</b>	<b>- 12 -</b>
5.1	Air Quality	- 12 -
5.2	Construction Noise	- 12 -
5.3	Water Quality	- 13 -
5.4	Ecology	- 14 -
5.5	Other Factors Influencing the Monitoring Results	- 14 -
5.6	QA/QC Results and Detection Limits	- 14 -
<b>6.</b>	<b>REPORT ON NON-COMPLIANCE, COMPLAINT, NOTIFICATION OF SUMMONS AND SUCCESSFUL PROSECUTION</b>	<b>- 15 -</b>
6.1	Record of Non-Compliance of Action and Limit Levels	- 15 -
6.2	Environmental Complaints	- 15 -
6.3	Record of Notification of Summons and Successful Prosecution	- 15 -
6.4	Review of Reasons for and Implication of NC, Complaint and NoS	- 15 -
6.5	Description of Follow-up Actions Taken	- 15 -
6.6	Others	- 15 -
<b>7</b>	<b>CONCLUSIONS AND RECOMMENDATIONS</b>	<b>- 17 -</b>

## Appendices

Appendix A	Project Site Location Plan
Appendix B	The Organization Chart and Lines of Communication with Environmental Management
Appendix C	Master Construction Program, Future Construction Works & Environmental Mitigation Implementation Schedule
Appendix D	Location of Monitoring Stations
Appendix E	Certificates of Calibration
Appendix F	Details of the Event Action Plan
Appendix G	Monitoring Schedule
Appendix H	Detailed Impact Monitoring Data of Air Quality and Water Quality
Appendix I	Graphic Plot of Monitoring
Appendix J	Meteorological Records
Appendix K	Proforma of the weekly ET Site Inspection Checklist
Appendix L	Proforma of the Ecology Inspection Checklist
Appendix M	Monthly Summary Waste Flow Table

## Tables

Table 1-1	Summary of the Channels under the Project
Table 3-1	Environmental Mitigation Measures Undertake in Reporting Month
Table 3-2	Status of Environmental Licenses and Permits
Table 4-1	Summary of Monitoring Parameters
Table 4-2	Monitoring Locations Proposed in the EM&A Manuals
Table 4-3	Air Quality Monitoring Equipment
Table 4-4	Construction Noise Monitoring Equipment
Table 4-5	Water Quality Monitoring Equipment
Table 4-6	Action and Limit Levels for Air Quality
Table 4-7	Action and Limit Levels for Construction Noise
Table 4-8	Action and Limit Levels for Water Quality
Table 4-9	Action and Limit Levels for Ecology in Construction Phase at Channels MUP05 and LMH01
Table 4-10	Action Level for Landscape and Visual Impact in Construction Phase
Table 5-1	Summary of 1-hour TSP Monitoring Results ( $\mu\text{g}/\text{m}^3$ )
Table 5-2	Summary of 24-hour TSP Monitoring Results ( $\mu\text{g}/\text{m}^3$ )
Table 5-3	Results of Construction Noise Monitoring at MUP-N1 / MUP01/02-N1 (MUP05)
Table 5-4	Results of Construction Noise Monitoring at MUP-N2 (MUP05)
Table 5-5	Results of Construction Noise Monitoring at MUP-N3 (MUP05)
Table 5-6	Results of Construction Noise Monitoring at MUP-N4 (MUP04A)
Table 5-7	Summary of Stream Water Quality Exceedances
Table 5-8	Summary of Defects and Deficiencies Identified and Follow-up Actions and Remedies Taken
Table 6-1	Summary of Quantities of Waste for Disposal
Table 6-2	Summary of Quantities of Waste for Reuse/Recycling
Table 6-3	Summary of Findings of Site Inspection and Environmental Audit

## 1. INTRODUCTION

The Chiu Hing Construction & Transportation Company Limited (CHCT) was appointed by the Drainage Services Department (DSD) to perform a contract – Contract No. DC/2007/08 *Drainage Improvement Works at Tai Po Tin, Ping Che, Man Uk Pin and Lin Ma Hang* (the Project). Total construction time is approximately 32 months.

The Project involves construction of various river channels: some classified as Designated Project (DP) and some Non-designated Project (Non-DP) under the Environmental Impact Assessment Ordinance (Cap. 499), as summarized in **Table 1-1**.

Table 1-1 Summary of the Channels under the Project

Channel ID	Location	Designated / Non-Designated
TKL02	Tai Po Tin	Non-Designated
TKL07	Ping Che / Ta Kwu Ling	Non-Designated
MUP01	Man Uk Pin	Non-Designated
MUP02		Non-Designated
MUP03A and MUP03B		Designated (EP277/2007)
MUP04A and MUP04B		Designated (EP277/2007)
MUP05		Designated (EP277/2007)
LMH01		Lin Ma Hang

This is the 5<sup>th</sup> monthly report covering data from **26 June to 25 July 2009** to present the monitoring results of air quality, construction noise, water quality and ecology for the Designated Project of Channels MUP03A&B, MUP04A&B, MUP05 and LMH01 under the Environmental Monitoring & Audit Manual [382486/73//Issue2]. A set of location plans showing all DP works covered in this report are illustrated in **Appendix A**. Details of EM&A requirements for the Designated Project are summarized below:

- (a) Channel MUP03A&B – NA
- (b) Channel MUP04A&B – the scope of environmental monitoring includes construction noise, air quality and water quality
- (c) Channel MUP05 – the scope of environmental monitoring includes construction noise, air quality, water quality and ecology
- (d) Channel LMH01 – the scope of environmental monitoring includes construction noise, air quality, water quality and ecology

It has been agreed among the Engineer's Representative (ER), the Independent Environmental Checker (IEC), the Contractor (CHCT), the Environmental Team (ET) and the Environmental Protection Department (EPD) that 25<sup>th</sup> of each month is the cut-off day of each reporting month. Data collected after the 26<sup>th</sup> of every month will be reported in the next issue.

### 1.1 REPORT STRUCTURE

This report has been written in accordance with the requirements set out in the *Environmental Monitoring and Audit Manual* (the EM&A Manual) with the following structure:

Section 1	Introduction
Section 2	Basic Project Information
Section 3	Environmental status
Section 4	Summary of Impact EM&A Requirements
Section 5	Impact Monitoring Results
Section 6	Report on Non-Compliance (NC), Complaint, Notification of Summons (NOS) and Successful prosecution
Section 7	Conclusions and Recommendations

## 2. BASIC PROJECT INFORMATION

### 2.1 PROJECT ORGANIZATION

The organization chart and lines of communication with respect to the on-site environmental management and the management structure are shown in **Appendix B**.

### 2.2 MASTER CONSTRUCTION PROGRAM FOR THE PROJECT

The master construction program of the Project is shown in **Appendix C**. Environmental mitigation measures implemented are shown in **Appendix C**.

### 2.3 WORKS UNDERTAKEN DURING THE REPORTING MONTH

During this reporting month, the construction work undertaken at the designated work areas is listed as follows:

<u>Channel</u>	<u>Construction Work Activities</u>
MUP03A&B, MUP04A&B; and MUP05	<ul style="list-style-type: none"><li>• Construction of site access</li><li>• Site clearance</li><li>• Survey setting out</li><li>• Construction of gabion wall</li><li>• Trees transplant</li><li>• Installation of site hoardings</li></ul>
LMH01	Not yet commenced

Future construction works is provided in **Appendix C**.

### 3. ENVIRONMENTAL STATUS

#### 3.1 WORK UNDERTAKEN DURING THE MONTH WITH ILLUSTRATIONS

In this reporting month, the construction work was undertaken at Channels MUP03A&B, MUP04A&B and MUP05. All proposed construction channels are located at Man Uk Pin. The environmental mitigation implement is shown in **Table 3-1**.

Table 3-1 Environmental Mitigation Measures Undertake in the Reporting Month

Location	Construction Activities	Environmental Mitigation Measures to be deployed
MUP03A&B, MUP04A&B; and MUP05	Construction of site access	<ul style="list-style-type: none"> <li>Excavated area and stockpile of soil material was dampened / covered before dispose off-site</li> </ul>
	Site clearance	<ul style="list-style-type: none"> <li>Water spraying was provided before and during handling of excavated material.</li> </ul>
	Trees transplant	<ul style="list-style-type: none"> <li>Excavated area and stockpile of soil material was dampened / covered before dispose off-site</li> <li>Retained tree will be properly protected before works commenced.</li> </ul>
	Construction of gabion wall	<ul style="list-style-type: none"> <li>Excavated area and stockpile of soil material was dampened / covered before dispose off-site</li> <li>Water spraying will be provided before and during handling of excavated material.</li> <li>Retained tree will be properly protected before works commenced.</li> </ul>
	Survey setting out	<ul style="list-style-type: none"> <li>Tree will be properly protected before works commenced.</li> </ul>
	Installation of site hoardings	<ul style="list-style-type: none"> <li>Excavated area and stockpile of soil material was dampened / covered before dispose off-site</li> <li>Retained tree will be properly protected before works commenced.</li> <li>Tree will be properly protected before works commenced.</li> </ul>

#### 3.2 IMPLEMENTATION OF ENVIRONMENTAL PROTECTION AND POLLUTION CONTROL

The implementation of environmental protection and pollution control/mitigation measures as recommended in the EM&A Manual or ES is shown in **Appendix C**.

A summary status of the permits, licences, and/or notifications on environmental protection for this Project in this reporting month is presented in **Table 3-2**.

Table 3-2 Status of Environmental Licenses and Permits

Item	Item Description	Permit Status
1	Environmental Permit No.EP277/2007	Issued on 9 July 2009
2	Air Pollution Control (Construction Dust)	Notification to EPD on 27/12/2007
3	Chemical Waste Producer Registration <ul style="list-style-type: none"> <li>5213-652-C3251-04</li> <li>5213-652-C3251-05</li> </ul>	Valid date: 23 July 2008 Valid date: 15 August 2008
4	Water Pollution Control (Discharge license) <ul style="list-style-type: none"> <li>W5/1G34/1</li> <li>W5/1G35/1</li> <li>W5/1I324/1</li> <li>W5/1I325/1</li> </ul>	Expiry date: 31 August 2013 Expiry date: 31 August 2013 Expiry date: 31 August 2013 Expiry date: 31 August 2013
5	Account for Disposal of Construction Waste No. 7006522	Valid date: 9 January 2008
6	Construction Noise Permit	Nil



#### 4. SUMMARY OF IMPACT MONITORING REQUIREMENTS

Environmental monitoring and audit for air quality, noise, water quality and ecology have been recommended in the EM&A Manual. They are summarized below.

##### 4.1 MONITORING PARAMETERS

The monitoring parameters are summarized in **Table 4-1**.

Table 4-1 Summary of Monitoring Parameters

Environmental Issue	Parameters	
Air Quality	<ul style="list-style-type: none"> <li>1-hour Total Suspended Particulate (1-hour TSP); and</li> <li>24-hour Total Suspended Particulate (24-hour TSP).</li> </ul>	
Construction Noise	<ul style="list-style-type: none"> <li>A-weighted equivalent continuous sound pressure level (30min) (Leq(30min)) during the normal working hours; and</li> <li>A-weighted equivalent continuous sound pressure level (5min) (Leq(5min)) for construction work during the Restricted Hours.</li> </ul>	
Water Quality	In-Situ Measurement	temperature, dissolved oxygen (DO), dissolved oxygen saturation (DOS), pH value, water depth, temperature & turbidity
	Laboratory Analysis	suspended solids (SS)
Ecology	MUP05 and LMH01	<ul style="list-style-type: none"> <li>The stream conditions monitoring (in-situ measurements of DO, pH and turbidity; laboratory testing of SS);</li> <li>General site audit to reporting the mitigation measures are properly implemented during the construction phase</li> </ul>

##### 4.2 MONITORING LOCATIONS

###### 4.2.1 Monitoring Locations Proposed in the EM&A manuals

Monitoring locations have been identified in the EM&A Manual. They are shown in **Appendix D** and summarized in **Table 4-2**.

Table 4-2 Monitoring Locations Proposed in the EM&A Manuals

Issue	Channel	Sensitive Receiver	Monitoring Location ID	Detailed Address	
Air	MUP04A	MUP04A-2	MUP-A3	Village house near Loi Tung	
	MUP05	MUP05-2 (same as MUP01/02-1)	MUP-A1 (same as MUP01/02-A1)	Village north of Loi Tung (same as Village house at Man Uk Pin)	
	MUP05	MUP05-4	MUP-A2a#	Village north of Loi Tung	
Noise	MUP04A	MUP04A-2	MUP-N4	Village house near Loi Tung	
	MUP05	MUP05-2 (same as MUP01/02-1)	MUP-N1 (same as MUP01/02-N1)	Village north of Loi Tung (same as Village house at Man Uk Pin)	
			MUP-N2	Village north of Loi Tung	
			MUP-N3	Village north of Loi Tung	
	LMH01	LMH01-1 LMH01-2 LMH01-3 LMH01-4 LMH01-5	LMH-N1*	Village of Lin Ma Hang(* Remark: Mobile station subject to the location of the construction works to be measured at Sensitive Receiver LMH01-1 or LMH01-2 or LMH01-3 or LMH01-4 or LMH01-5)	
Water	MUP04A	Control Station	MUP-W3	Upstream of MUP04A works	
	MUP05	Control Station	MUP-W1 (same as MUP01/02-W1)	Upstream of MUP01 works	
		Control Station	MUP-W2 (same as MUP01/02-W2)	Upstream of MUP02 works	
		Impact Station	MUP-W4	Downstream of MUP05 works immediately at the discharge point to River Indus	
		Temporary / Mobile Station	MUP-W5	Within MUP05, downstream of the discharge point of MUP01/02 and upstream of the discharge point of MUP04A	
		Temporary / Mobile Station	MUP-W6	Within MUP05, downstream of the discharge point of MUP01/02 and MUP04A	

Issue	Channel	Sensitive Receiver	Monitoring Location ID	Detailed Address
Water	LMH01	Control Station	LMH-W1	Upstream of LMH01 works
		Control Station	LMH-W2	Upstream of LMH01 works
		Impact Station	LMH-W3	Downstream of all LMH01 works immediately at the discharge point to Shenzhen River
		Temporary / Mobile Station	LMH-W4	Upstream and downstream of particular group of LMH01 works
		Temporary / Mobile Station	LMH-W5	Upstream and downstream of particular group of LMH01 works
		Temporary / Mobile Station	LMH-W6	Upstream and downstream of particular group of LMH01 works
Ecology	MUP05 and LMH01	Water Quality of Stream		Upstream and downstream of Construction site
		General Site audit (with emphasis on ecological mitigation measures)		Along stream channel, within 100m upstream and downstream of construction site
	LMH01	Surveys of fish species		Along stream channel, within 100m upstream and downstream of construction site

# Access to the original air quality monitoring location MUP-A2 has been denied. The nearby air quality sensitive receiver MUP05-4 is recommended to be the replacement of the denied MUP-A2 and named MUP-A2a for ease of reference.

### 4.3 MONITORING FREQUENCY

The impact monitoring should be conducted during the construction activities pass through the contract period to ensure the ambient environmental conditions compliance with the environmental performance criteria i.e. Action and Limit Levels for the Project. The impact monitoring frequency specified in the EM&A Manual is summarized below.

#### **Air Quality**

Parameters: 24-hour TSP and 1-hour TSP.

Frequency: Once every 6 days for 24-hour TSP & three times every 6 days for 1-hour TSP.

Duration: During the course of construction works

#### **Construction Noise**

Parameters: Leq(30 min) in six consecutive Leq(5 min) measurements..

Frequency: Once a week during 0700-1900 on normal weekdays:

Duration: During the course of construction works

#### **Water Quality**

Parameters: Duplicate in-situ measurements of water depth, temperature, DO, pH & turbidity; and laboratory testing of SS. Relevant data will also be measured time of sampling, DO Saturation, weather conditions and special phenomena.

Depths: All measurements will be carried out at three water depths, namely, 1 m below water surface, mid-water depth, and 1 m above river bed. If the water depth is less than 6 m, the mid-depth measurement will be omitted. If the depth is less than 3 m, only the mid-depth measurement will be taken.

Frequency: 3 days a week with an interval of at least 36 hours between two consecutive sampling days

Duration: During the construction period of the channel works

#### **Ecology**

According to the EM&A Manual [382486/73/Issue2], ecology monitoring is only performed at the Channels MUP05 and LMH01 during the construction phase, the monitoring requirements are listed as following:

##### Parameters:

- (a) General site audit with emphasis on ecology mitigation measure;
- (ii) Water quality of stream (DO, pH, turbidity and SS); and
- (iii) Survey of fish species, which is only requested at Channel LMH01

##### Frequency:

- (b) Once a week for general site audit throughout the construction period;
- (ii) Three times per week for stream monitoring; and
- (iii) Once per week for survey of fish species.

Duration:

Throughout the whole construction period

4.4 MONITORING EQUIPMENT

The monitoring equipments for air quality, construction noise, stream water quality and ecology are summarized below.

4.4.1 Air Quality

A list of air quality monitoring equipments is shown in **Table 4-3**.

Table 4-3 Air Quality Monitoring Equipment

Equipment	Model
<b>24-hour TSP</b>	
High Volume Air Sampler (herein after 'HVS')	Grasby Anderson GMWS 2310 HVS
Calibration Kit	TISCH Model TE-5028A
<b>1-hour TSP</b>	
Portable Dust Meter	TSI DustTrak Model 8520

4.4.2 Construction Noise

A list of construction noise monitoring equipments is shown in **Table 4-4**.

Table 4-4 Construction Noise Monitoring Equipment

Equipment	Model
Integrating Sound Level Meter	B&K Type 2236
Calibrator	B&K Type 4231
Portable Wind Speed Indicator	Testo Anemometer

4.4.3 Water Quality

Monitoring Equipments for water quality are shown in **Table 4-5**.

Table 4-5 Water Quality Monitoring Equipment

Equipment	Model / Description
<b>In-situ Measurement</b>	
Water Depth Detector	Eagle Sonar or steel ruler
Water Sampler	Teflon bailer / bucket
Thermometer & DO meter	YSI Multimeter
pH meter	Hanna HI98107
Turbidimeter	Hach 2100p
Sample Container	High density polythene bottles (provided by laboratory)
Storage Container	'Willow' 33-liter plastic cool box
<b>Laboratory Analysis</b>	
Suspended Solids	HOKLAS accredited Laboratory

4.4.4 Equipment Calibration

The calibrations certificate of all monitoring equipments are used during the impact monitoring program are attached in **Appendix E** and the calibration requirement are described in below:

Air Quality

The calibration of the HVS is performed at a two month intervals in accordance with the manufacturer's instruction using the NIST-certified standard calibrator (Tisch Calibration Kit Model No.TE-5028A). The calibration data are properly documented and the associated records are maintained by the ET for future reference.

The 1-hour TSP meter is calibrated at a year intervals in accordance with the in-house method. Zero response of the equipment is checked before and after each monitoring event.

#### Noise

The sound level meters are calibrated using an acoustic calibrator prior to and after spot checking measurements. The meters are regularly calibrated by HOKLAS accredited laboratory. Prior to and following each noise measurement, the accuracy of the sound level meter is checked using an acoustic calibrator generating a known sound pressure level at a known frequency. Measurements are considered valid only if the calibration levels before and after the noise measurement agree to within 1.0 dB.

#### Water Quality

In-situ monitoring instruments are calibrated and certified by a laboratory accredited under HOKLAS or any other international accreditation scheme at 3 monthly intervals.

#### 4.4.5 Ecology

The following equipment will be used for monitoring:-

- General: field note books and survey forms, digital camera; and
- Binoculars (7-10x and 8 x 30 magnification);

#### 4.4.6 Others EM&A Requirement

Landscape & Visual and Cultural Heritage impact monitoring are also required for the Designated Project and stipulated in EM&A manual [382486/73//Issue2] **Section 7** and **Section 8** accordingly

#### Landscape & Visual

Landscape and visual mitigation measures should be implemented during construction phase according to the EM&A Manual. The construction phase landscape and visual EM&A shall be carried out as part of the site audit program. Site inspection will be undertaken at least once every two weeks throughout the construction period.

#### Cultural Heritage

Cultural heritage of the Terrance Wall (AAHB-855) at Lin Ma Hang (LMH01) is required to be carried out during the construction phase in accordance with the EM&A Manual [382486/73//Issue2].

#### 4.5 MONITORING PROCEDURE

The monitoring methodology and procedure during the impact monitoring are presented as below:

#### 4.5.1 Air Quality

##### 1- hour TSP

Operation of the 1-hour TSP meter is follow manufacturer's Operation and Service Manual. The 1-hour TSP monitor, a TSI Dust Track Aerosol Monitor Model 8520, or Sibata LD-3 Laser Dust Meter is a portable, battery-operated laser photometer. The 1-hour TSP meter provides a real time 1-hour TSP measurement based on 90<sup>0</sup> light scattering. The 1-hour TSP monitor consists of the following:

- A pump to draw sample aerosol through the optic chamber where TSP is measured;
- A sheath air system to isolate the aerosol in the chamber to keep the optics clean for maximum reliability; and
- A built-in data logger compatible with Windows based program to facilitate data collection, analysis and reporting.

The 1-hour TSP meter using was within the valid period, calibrated by the manufacturer prior to purchasing. Zero response of the instrument was checked before and after each monitoring event.

##### 24 -hour TSP

The equipment used for 24-hour TSP measurement is the HVS brand named Thermo Andersen, Model GS2310 TSP high volume air sampling system, which complied with EPA Code of Federal Regulation, Appendix B to Part 50. The HVS consists of the following:

- An anodized aluminum shelter;
- A 8"x10" stainless steel filter holder;

- A blower motor assembly;
- A continuous flow/pressure recorder;
- A motor speed-voltage control/elapsed time indicator;
- A 6-day mechanical timer, and
- A power supply of 220v/50 Hz

The HVS is calibrated prior the impact monitoring to following the manufacturer's instruction using the NIST-certified standard calibrator brand named Tisch Calibration Kit Model TE-5028A. Regular HVS operation and maintenance as well as filter paper installation and collection was performed by the ET's competent technicians, whereas laboratory analyses were conducted in a local HOKLAS accredited laboratory, ALS Technichem (HK) Pty Ltd (hereinafter 'ALS'). The analyzed 24-hour TSP filters were kept in ALS for six months prior to disposal.

#### Meteorological Information

All relevant data including temperature, pressure, weather conditions, elapsed-time meter reading for the start and stop of the sampler, identification and weight of the filter paper is recorded in detail.

Meteorological information is sourced from the Hong Kong Observatory (Ta Kwu Ling Station). The data included wind direction, wind speed, humidity, rainfall, air pressure and temperature etc that in general is required for evaluating the air quality for air quality monitoring.

#### 4.5.2 Construction Noise

Sound level meters listed above comply with the International Electrotechnical Commission Publications 651: 1979 (Type 1) and 804: 1985 (Type 1) specifications, as recommended in Technical Memorandum (TM) issued under the Noise Control Ordinance (NCO).

All noise measurements are performed with the meter set to FAST response and on the A-weighted equivalent continuous sound pressure level (Leq). Leq(30min) measurements are used as the monitoring parameter for the time period throughout the construction phase.

The sound level meter is set higher than 1.2m above the existing ground. The microphone is pointed to the site with the microphone facing perpendicular to the line of sight. The windshield is fitted for all measurements. The measurement point at impact locations is normally set close to the exterior of the building.

Immediately prior to and following each noise measurement the accuracy of the sound level meter is checked using an acoustic calibrator generating a known sound pressure level at a known frequency (94dBA). Measurements are accepted as valid due to the calibration levels from before and after the noise measurement agree to within 1.0dB.

#### 4.5.3 Water Quality

Water quality monitoring is conducted at the middle of the water columns (Mid-Depth) due to water columns at all sampling locations are less than 3.0 meters during monitoring.

##### Water Depth

Water depths are determined prior to measurement and sampling. A steel ruler with a suitable weight was dropped to the bottom of the water column to measure the water depth which is actually well below 1 meter.

##### Dissolved Oxygen (DO)

A portable Extech Instrument, ExStik<sup>®</sup> DO600 DO Meter is used for in-situ DO measurement. The DO meter is capable of measuring DO in the range of 0 - 20 mg/L and 0 - 200 % saturation and checked against water saturated ambient air on each monitoring day prior to monitoring.

Although the DO Meter automatically compensates ambient water temperature to a standard temperature of 20<sup>0</sup>C for ease of comparison of the data under the changing reality, the temperature readings of the DO Meter is recorded.

#### pH

A portable Extech Instrument, ExStik™ Models pH110 pH Meter is used for in-situ pH measurement. The pH meter is capable of measuring pH in the range of 0 – 14 and readable to 0.1. Standard buffer solutions of pH 7 and pH 10 are used for calibration of the instrument before and after measurement.

#### Turbidity

A portable Hach 2100p turbidity Meter is used for in-situ turbidity measurement. The turbidity meter is capable of measuring turbidity in the range of 0 – 1000 NTU.

#### Suspended Solids (SS)

SS is determined by ALS using HOKLAS accredited analytical methods namely ALS Method EA-025. The limit of report is 2mg/L

#### Water Sampler

Water samples are collected by the ET using a plastic sampler to avoid metal contamination. Due to water depth for both sampling locations are lesser than 0.5m, a cleaned plastic beaker is used for sample collection. The sampler is rinsed before collection with the sample to be taken. 1,000mL water sample is collected from depth for laboratory analyses.

#### Sample Container

Water samples are contained in screw-cap PE (Poly-Ethylene) bottles as provided by ALS. The PE bottles are pretreated by laboratory in accordance with the corresponding analytical requirements of HOKLAS. Where appropriate, the sampling bottles are rinsed with the water to be contained. Water sample is transferred from the sampler to the sample bottles to 95% bottle capacity to allow possible volume expansion during delivery and storage.

#### Sample Storage and delivery

A 'Willow' 33-litter plastic cool box packed with ice is used to preserve the collected water samples prior to arrival at the laboratory. The temperature of the cool box is maintained as close to 4°C as possible without being frozen. Samples are delivered to the laboratory end of sampling day or following day within the maximum storage time requirement.

#### Chemical Analysis

ALS Technichem (HK) Pty Ltd (HOKLAS No. 66) is appointed by ET to provide analytical services for this project. The analysis of suspended solids is carried out to follow the APHA Standard Methods for the Examination of Water and Wastewater 19ed 2540D. The sample preparation and analysis under the QA/QC control is follow the HOKLAS QA/QC requirements and undertaken by the laboratory.

### 4.5.4 Ecology

Weekly site audit covering the whole assessment area is conducted during the construction work at Channels MUP01 and MUP02, focusing on the status/condition of the study area and its immediate vicinity, especially those sensitive habitats that have been identified in the ESR and/or habitats of conservation importance as stated in the EIAO TM.

Any changes found during the site audit have been marked and reported in the Monthly EM&A Report, and for those changes will be predicted to possibly or probably have had an impact on flora and fauna distribution or numbers should be highlighted in the Monthly EM&A report.

Ecology of water quality monitoring at the stream as requested to undertake in upstream and downstream of construction site Channels MUP05 and LMH01. The location of monitoring stations and requirements are same as the Water Quality Monitoring at the Channels MUP05 and LMH01. The procedure of water monitoring is same as the Water Quality monitoring.

### 4.6 ENVIRONMENTAL QUALITY PERFORMANCE LIMITS

Baseline EM&A monitoring was carried out from 17 September to 13 October 2008, and ecological baseline monitoring for the habitat updating was performed on 16 September 2008 in accordance with the EM&A Manuals requirements. A summary of Action/Limit (A/L) Levels for air quality, construction noise, stream water quality, ecology and Landscape & Visual are shown in **Tables 4-6, 4-7, 4-8, 4-9 and 4-10** respectively.

Table 4-6 Action and Limit Levels for Air Quality

Monitoring Station	Action Level ( $\mu\text{g}/\text{m}^3$ )		Limit Level ( $\mu\text{g}/\text{m}^3$ )	
	1-hour TSP	24-hour TSP	1-hour TSP	24-hour TSP
MUP-A1	>307	>194	> 500	> 260
MUP-A2a	>300	>178	> 500	> 260
MUP-A3	>299	>178	> 500	> 260

Table 4-7 Action and Limit Levels for Construction Noise

Time Period	Action Level in dB(A)	Limit Level in dB(A)
0700-1900 hours on normal weekdays	When one documented complaint is received	> 75* dB(A)

Note: \* Reduces to 70 dB(A) for schools and 65 dB(A) during the school examination periods.

Table 4-8 Action and Limit Levels for Water Quality

Monitoring Location		DO (mg/L)		Turbidity (NTU)		pH (Unit)		SS (mg/L)	
ID	Station Type	Action Level	Limit Level	Action Level	Limit Level	Action Level	Limit Level	Action Level	Limit Level
MUP-W1	Control	NA	NA	NA	NA	NA	NA	NA	NA
MUP-W2	Control	NA	NA	NA	NA	NA	NA	NA	NA
MUP-W3	Control	NA	NA	NA	NA	NA	NA	NA	NA
MUP-W4	Impact	5.27	5.18	18.03	24.81	6.5 - 8.5	6.0 - 9.0	15.8	17.6
MUP-W5	Mobile	4.42	4.37	7.88	8.54	6.5 - 8.5	6.0 - 9.0	6.0	6.0
MUP-W6	Mobile	4.54	4.51	11.81	14.84	6.5 - 8.5	6.0 - 9.0	3.9	4.8
LMH-W1	Control	NA	NA	NA	NA	NA	NA	NA	NA
LMH-W2	Control	NA	NA	NA	NA	NA	NA	NA	NA
LMH-W3	Impact	3.96	3.62	11.31	12.10	6.5 - 8.5	6.0 - 9.0	8.8	10.6
LMH-W4	Mobile	4.34	3.98	5.33	5.95	6.5 - 8.5	6.0 - 9.0	3.0	3.0
LMH-W5	Mobile	2.14	2.07	31.46	35.33	6.5 - 8.5	6.0 - 9.0	25.0	29.8
LMH-W6	Mobile	2.67	2.65	12.32	13.02	6.5 - 8.5	6.0 - 9.0	4.8	6.6

Note: - For DO, non-compliance of water quality limits occurs when monitoring result is lower than the limits.  
 - For SS and turbidity, non-compliance of the water quality limits occurs when monitoring result is higher than the limits.  
 - For pH, non-compliance of water quality limits occurs when monitoring result is exceeded the range of limits.

Table 4-9 Action and Limit Levels for Ecology in Construction Phase at Channels MUP05 and LMH01

Parameter	Action Level	Limit Level
<ul style="list-style-type: none"> <li>Any construction works do not cause adverse ecological impacts outside the work site of Channels</li> <li>Where natural banks are to be retained are protected from adverse effects of engineering works, including impacts to riparian vegetation along these banks</li> <li>The existing natural stream channel is protected from adverse effect of engineering works, including potential indirect impacts through increased sedimentation</li> <li>Rock/fines used to form the bottom of the widened channel have the appropriate physical characteristics to permit re-establishment of semi-natural stream conditions</li> <li>The recommended mitigation measures are properly implemented by the Contractor</li> </ul>	Non-conformity on one occasion	Repeated Non-conformity

Table 4-10 Action Level for Landscape and Visual Impact in Construction Phase

Parameter	Action Level	Limit Level
Any trespass by the contractor outside the limit of the works, including any damage to existing trees, woodland and vegetation	Non-conformity on one occasion	Repeated non-conformity

#### 4.7 EVENT AND ACTION PLANS

An Event Action Plan for air quality, construction noise, water quality and ecology has been implemented for this designated project. Details of the Event Action Plan are presented in **Appendix F**.

4.8 ENVIRONMENTAL MITIGATION MEASURES

The project ESR has recommended environmental mitigation measures to minimize potential environmental impacts arising from the construction of the project. A full list of the mitigation measures is detailed in **Appendix C**.

4.9 DATA MANAGEMENT AND DATA QA/QC CONTROL

The impact monitoring data is handled by the ET's systematic data recording and management, which complies with an in-house certified (ISO 9001:2000) Quality Management System. Standard Field Data Sheets (FDS) are used in the EM&A program.

The monitoring data recorded in the equipment e.g. 1-hour TSP meters and noise meters are downloaded directly at the end of each monitoring day. The downloaded monitoring data are input into a computerized database properly maintained by the ET. The laboratory results are input directly into the computerized database and QA/QC checked by personnel other than those who input the data.

For monitoring activities which require laboratory analysis, the responsible laboratory, ALS, follows the QA/QC requirements as set out under their HOKLAS scheme for all laboratory testing.



## 5. IMPACT MONITORING RESULTS

In this reporting month, construction works and therefore environmental monitoring had started at Channels MUP03A&B, MUP04A&B and MUP05 located in Man Uk Pin. No impact monitoring has yet been undertaken at Channel LMH01 due to no construction activities during the month. In the future when the EM&A programme will cover all four channels once works in Channel LMH01 start.

The scheduled impact monitoring in this month is shown in **Appendix G** and the monitoring results are detailed in the following sub-sections. The meteorological data during the Reporting Period are summarized in **Appendix J**.

### 5.1 AIR QUALITY

According to the EM&A Manual, air monitoring is only requested at Channels MUP04A and MUP05 during the construction phase. The results of impact air quality monitoring for 24-hour and 1-hour TSP are summarized in **Tables 5-1** and **5-2**. The 24-hour TSP data are shown in **Appendix H** and graphic plots are shown in **Appendix I**.

Table 5-1 Summary of 1-hour TSP Monitoring Results ( $\mu\text{g}/\text{m}^3$ )

Date	MUP-A1 (MUP05)			MUP-A2a (MUP05)			MUP-A3 (MUP04A)					
	Start Time	Measurement			Start Time	Measurement			Start Time	Measurement		
		1 <sup>st</sup>	2 <sup>nd</sup>	3 <sup>rd</sup>		1 <sup>st</sup>	2 <sup>nd</sup>	3 <sup>rd</sup>		1 <sup>st</sup>	2 <sup>nd</sup>	3 <sup>rd</sup>
27-Jun-09	13:27	43	47	40	13:13	45	51	49	13:18	49	55	54
4-Jul-09	13:32	51	47	48	13:13	55	60	62	13:22	46	44	47
10-Jul-09	13:35	38	41	35	13:16	48	54	52	13:27	51	58	61
16-Jul-09	13:22	34	39	32	13:09	44	51	46	13:17	32	38	33
22-Jul-09	13:26	49	55	50	13:11	66	74	69	13:19	63	69	64
Average (range)		43 (32 – 55)				55 (44 – 74)				51 (32 – 69)		

Table 5-2 Summary of 24-hour TSP Monitoring Results ( $\mu\text{g}/\text{m}^3$ )

Date	MUP-A1 (MUP05)	MUP-A2a (MUP05)	MUP-A3 (MUP04A)
26-Jun-09	12	13	15
3-Jul-09	33	35	12
9-Jul-09	26	24	23
15-Jul-09	17	11	10
21-Jul-09	21	13	13
Average (range)	22 (12 – 33)	19 (11 – 35)	15 (10 – 23)

As shown in **Tables 5-1** and **5-2**, 1-hour and 24-hour TSP results fluctuated well below the corresponding Action Levels. No exceedance of Action and Limit Levels was recorded during the period. No Notifications of Environmental Quality Limit Exceedances (NOE) or corrective actions were therefore required for these parameters.

### 5.2 CONSTRUCTION NOISE

According to the EM&A Manual, noise monitoring is only required at Channels MUP04A and MUP05 during the construction phase. All noise monitoring results are summarized in **Tables 5-3** to **5-6** and graphic plot are shown in **Appendix I**.

Table 5-3 Results of Construction Noise Monitoring at Channels MUP-N1 / MUP01/02-N1 (MUP05)

Date	Start Time	1st Leq5	2nd Leq5	3rd Leq5	4th Leq5	5th Leq5	6th Leq5	Leq30 dB(A)
27-Jun-09	13:30	50.8	52.3	52.7	51.7	53.3	51.5	52.1
4-Jul-09	13:35	57.9	54.2	54.2	54.3	59.1	56.9	56.6
10-Jul-09	13:38	58.1	58.8	59.3	61.1	59.7	58.1	59.3
16-Jul-09	13:25	56.1	54.6	54.4	54.3	55	56	55.1
22-Jul-09	13:31	60.8	58.4	57	57.7	59.9	58.2	58.9
Limit Level (Leq30)		75 dB(A)						

Table 5-4 Results of Construction Noise Monitoring at Channels MUP-N2 (MUP05)

Date	Start Time	1st Leq5	2nd Leq5	3rd Leq5	4th Leq5	5th Leq5	6th Leq5	Leq30 dB(A)
27-Jun-09	15:36	53.9	55.4	56	54	55.6	57.4	55.6
4-Jul-09	15:39	67.5	68	54.1	60.7	52.2	58.2	63.7
10-Jul-09	15:36	51.3	51.8	50.8	48.1	50	51.5	50.7
16-Jul-09	15:16	61.7	60.1	57.5	49.4	55.7	56.9	58.3
22-Jul-09	15:32	51.9	50.2	49.9	50.4	50.9	50.6	50.7
Limit Level (Leq30)		75 dB(A)						

Table 5-5 Results of Construction Noise Monitoring at Channels MUP-N3 (MUP05)

Date	Start Time	1st Leq5	2nd Leq5	3rd Leq5	4th Leq5	5th Leq5	6th Leq5	Leq30 dB(A)
27-Jun-09	14:10	49.1	49.8	50.1	48.5	48.8	49.7	49.4
4-Jul-09	14:13	54.3	52.2	53.3	54.1	56.1	53.2	54.0
10-Jul-09	14:14	46.9	47.2	47.6	50.8	49.4	49.1	48.7
16-Jul-09	14:01	49.3	49.9	49.6	48.6	48.7	49.1	49.2
22-Jul-09	14:10	49.6	48.5	46.9	47.3	49.3	50.4	48.8
Limit Level (Leq30)		75 dB(A)						

Table 5-6 Results of Construction Noise Monitoring at Channels MUP-N4 (MUP04A)

Date	Start Time	1st Leq5	2nd Leq5	3rd Leq5	4th Leq5	5th Leq5	6th Leq5	Leq30 dB(A)
27-Jun-09	14:53	47.6	49.5	49.1	46.5	47.7	48.4	48.2
4-Jul-09	14:55	53.1	54.5	70	66.3	58.7	56	64.2
10-Jul-09	14:58	51.7	50.5	47.4	47.5	49.3	48.7	49.5
16-Jul-09	14:38	48.9	58.3	57.5	45.7	45.6	46.3	53.8
22-Jul-09	14:53	49.1	49	48.2	47.4	47.8	48.7	48.4
Limit Level (Leq30)		75 dB(A)						

As shown in **Tables 5-3** and **5-6**, the construction noise levels fluctuated well below the Limit Level. No documented complaints against the construction noise were registered during the Reporting Period. No NOE or corrective actions were therefore required for the parameter

### 5.3 WATER QUALITY

In this reporting month, a total of 13 sampling days were performed for stream water quality monitoring according to the EM&A Manual requirements. Detailed in-situ measurement and laboratory results are shown in **Appendix H** and graphic plots given in **Appendix I**.

There were 22 exceedances of water quality (Action/Limit Level) recorded in the streams in this reporting month. Out of the 21 exceedances, 2 Limit Level exceedances were due to DO; 6 Action/ Limit Level exceedances were found in turbidity and 13 Action/Limit Level exceedances were in suspended solid. The NOEs were issued and Investigations were conducted in accordance with EM&A Manual requirements. Site inspection observed that increased water turbidity due to algae growth in Channel MUP05; also turbid water was found discharged into MUP04 from a nearby construction. Therefore, it was concluded that all exceedances of stream water quality were not related to the works of the Project. A summary of exceedances in this reporting month is provided in **Table 5-7** below.

Table 5-7 Summary of Stream Water Quality Exceedances

Station	DO		Turbidity		pH Value		SS		Total Exceedance	
	Action	Limit	Action	Limit	Action	Limit	Action	Limit	Action	Limit
MUP-W4 <sup>(a)</sup>	0	0	1	0	0	0	0	1	1	1
MUP-W5 <sup>(b)</sup>	0	1	0	3	0	0	0	4	0	8
MUP-W6 <sup>(b)</sup>	0	1	0	2	0	0	3	5	3	8
No of Exceedances	0	2	1	5	0	0	3	10	4	17

Remarks: <sup>(a)</sup> impact station; <sup>(b)</sup> Temporary or mobile station

For pH measures, the results shown that the range of pH unit was within 7.0 -7.6 and within the lower or upper bounds of Action Limit Level.

Since the exceedances were not related to the project, no corrective actions were therefore required for all parameters. However CHCT should be reminded to enhance their water quality mitigation measures in order to minimize any potential water quality impacts as a good practice.

#### 5.4 ECOLOGY

According to the EM&A Manual [382486/73//Issue2], ecology monitoring is required for Channels MUP05 and LMH01 during the construction phase. In this reporting period, the construction works of Channels MUP05 commenced on 10 March 2009. However construction works in Channel LHM01 has not yet started. So ecology monitoring was only undertaken for Channel MUP05 only. Once construction activities at Channel LMH01 start, ecology monitoring of the stream water will immediately take place.

In this reporting month, four site visits were carried out on 2 July 2009, 10 July 2009, 16 July 2009 and 23 July 2009 by an ecological specialist, and it was noted that no major ground moving activities that would have any significant impact to the ecological condition of the project stream has been carried out during the reporting month.

However, two observations related to effectiveness of the temporary drainage measures to prevent muddy water from entering the stream were found and recorded. The detailed findings are list below in **Table 5-8** and the checklists are attached in **Appendix L**.

Table 5-8 Summary of Defects and Deficiencies Identified and Follow-up Actions and Remedies Taken

Date of Audit	Defects and Deficiencies Identified	Recommendation	Follow-up Actions and Remedies Taken
10 July 09	An area of bare mud was noted near the sediment trap	To hydro-seed the area to prevent and minimize run-off of muddy water into the stream	The area was found gradually colonized by weedy grasses gradually in the following audits
16 July 09	General refuse was observed within the watercourse	To improve the housekeeping of the project site	General refuses have not been found in subsequent audits during the reporting period.

#### 5.5 OTHER FACTORS INFLUENCING THE MONITORING RESULTS

There were no other noticeable external factors generally affecting the monitoring results in this reporting month.

#### 5.6 QA/QC RESULTS AND DETECTION LIMITS

Not applicable.

6. REPORT ON NON-COMPLIANCE, COMPLAINT, NOTIFICATION OF SUMMONS AND SUCCESSFUL PROSECUTION

6.1 RECORD OF NON-COMPLIANCE OF ACTION AND LIMIT LEVELS

No Action or Limit Level exceedance was identified for air quality and construction noise monitoring in this reporting month. However, 21 exceedances of stream water quality (Action/Limit Level) were recorded. Based on the subsequent investigations, all exceedances of stream water quality were considered as not related to the works of the Project.

6.2 ENVIRONMENTAL COMPLAINTS

No written or verbal complaints were received (written or verbal) for each medium during the Reporting Period.

6.3 RECORD OF NOTIFICATION OF SUMMONS AND SUCCESSFUL PROSECUTION

No notification of summons or successful prosecutions was recorded during the Reporting Period.

6.4 REVIEW OF REASONS FOR AND IMPLICATION OF NON-COMPLIANCE, COMPLAINT AND NOTICE OF SUMMONS

No non-compliance, complaint or Notice of Summons was received in this reporting month.

6.5 DESCRIPTION OF FOLLOW-UP ACTIONS TAKEN

It follows from **Sections 6.1** and **6.4** that no follow-up actions were necessary.

6.6 OTHERS

6.6.1 **Solid and Liquid Waste Management Status**

The quantity of waste for disposal or reuse is summarized in **Tables 6-1** and **6-2**. The monthly summary of waste flow table is shown in **Appendix M**.

Table 6-1 Summary of Quantities of Waste for Disposal

Type of Waste	Quantity	Disposal Location
C&D Materials (Inert) (m <sup>3</sup> )	0	Tuen Mun 38 Fill Bank
	4571	Reused in other Projects
C&D Materials (Non-Inert) (m <sup>3</sup> )	0	NENT
Chemical Waste (Litres)	0	NA
General Refuse (m <sup>3</sup> )	5	NA

Table 6-2 Summary of Quantities of Waste for Reuse/Recycling

Type of Waste	Quantity	Disposal Location
Metals for Recycling (kg)	1000	NA
Paper for Recycling (kg)	40	NA
Plastics for Recycling (kg)	0	NA

There was no known site effluent discharged but it was assumed that an estimated volume of 50m<sup>3</sup> of waste water was discharged in this reporting month.

6.6.2 Site Inspection and Environmental Audit

A total of five weekly environmental site inspection and audit were conducted jointly by the ER, EO and ET during the Reporting Period on **30 June and 7, 14 and 21 July 2009** and there was also an IEC audit undertaken on **14 July 2009**. No adverse environmental impacts were observed which indicated that the mitigation measures implemented were effective. Minor deficiencies found in the site inspection and audit were promptly rectified within the specified deadlines. Findings of the site inspection and environmental audit are summarized below.

Table 6-3 Summary of Findings of Site Inspection and Environmental Audit

Date	Findings / Deficiencies	Follow-Up Status
30 June 2009	<ul style="list-style-type: none"> <li>Stagnant water is observed at MUP01. The contractor is reminded to remove any stagnant water on site to eliminate mosquito breeding.</li> </ul>	The deficiencies have been improved during site inspection on 7 July 2009.
7 July 2009	<ul style="list-style-type: none"> <li>Stagnant water is observed at MUP01. The contractor is reminded to remove any stagnant water on site to eliminate mosquito breeding.</li> <li>Muddy water is observed at MUP01. The contractor is reminded to implement relative mitigation measures, such as placing sand bags, and desilting facilities before discharge</li> </ul>	The deficiencies have been improved during site inspection on 14 July 2009.
14 July 2009	<ul style="list-style-type: none"> <li>Exposed slope without cover is observed. The Contractor is advised to provide proper coverage over any exposed slope.</li> </ul>	The deficiencies have been improved during site inspection on 21 July 2009.
21 July 2009	<ul style="list-style-type: none"> <li>The Contractor is reminded to water the haul road regularly.</li> <li>Muddy water was observed during site inspection. The Contractor is advised to implement relative desilting facilities, such as set up gabion prior discharge to eliminate the SS content.</li> </ul>	observations of follow-up audit will be reported in next report:

Performa of the weekly ET site inspection and audit activities are presented in **Appendix K**.

#### 6.6.3 Works to be Undertaken in the Forth-Coming Month

Works to be undertaken next month are shown in the construction program enclosed in **Appendix C**. In addition, the activities undertaken in the Reporting Period including construction, preparation and site clearance activities will also continue in the future. They are summarized below:

The forthcoming activities in the next two months:

- (a) Survey setting up;
- (b) Tree transplant;
- (c) Construction of site access;
- (d) Site clearance;
- (e) Construction of gabion wall; and
- (f) Installation of site hoardings.

#### 6.6.4 Future Key Issues and Mitigation Measures for the Forth-Coming Month

During wet season, ingress of muddy water and other water pollutants from site surface runoff into the streams will become a key environmental issue, particularly during rainy day. Mitigation measures for water quality should therefore be properly maintained and improved as necessary. Temporary drainage plans should be implemented ahead.

Attention should also be paid to construction noise and other environmental issues identified in the EM&A Manual. Mitigation measures recommended in the ESR and summarized in Mitigation Measure Implementation Schedule should be fully implemented.

Although dry season has essentially gone, control of construction dust should be maintained and improved as necessary as preventative measures.

## 7 CONCLUSIONS AND RECOMMENDATIONS

This is the 5<sup>th</sup> monthly EM&A Report for Channels MUP03A&B, MUP04A&B, MUP05 and LMH01 - Designated Project, covering a period from **26 June to 25 July 2009**.

The monitored results demonstrated no exceedance of Action and Limit Levels of air quality and construction noise; and also no non-conformance of ecology during the Reporting Period. Therefore, no corrective actions were necessary for these environmental issues.

However, 21 exceedances of stream water quality (Action/Limit Levels) were recorded, which included 2 Limit Level exceedances of dissolved oxygen (DO), 6 Action/ Limit Level exceedances in turbidity, and 13 Action/Limit Level exceedances in suspended solids (SS). Based on the investigation reports, all exceedances were considered not related to the works of the Project. No associated corrective actions were therefore required.

No written or verbal complaints, notifications of summons or successful prosecutions were received during the Reporting Period. No adverse environmental impacts were observed during the weekly site inspection and environmental audit, which indicated that the implemented mitigation measures for air quality, construction noise and water quality were effective. A few minor deficiencies found in the weekly site inspection and they were rectified within the specified deadlines. The environmental performance of the Project was therefore considered satisfactory.

As wet season continues, ingress of muddy water and other water pollutants via site surface runoff into the river will become a key environmental issue, particularly during the rainy days. Mitigation measures for water quality should therefore be properly maintained and improved as necessary.

Attention should also be paid to construction noise and other environmental issues identified in the EM&A Manual. Other mitigation measures recommended in the ESR and summarized in Mitigation Measure Implementation Schedule should be fully implemented.

Although dry season has essentially gone, construction dust should be maintained and improved as necessary, as preventative measures.

Impact monitoring should be immediately undertaken upon the construction works commencement at Channel LMH01 and will be reported in the coming month.


- End of Text -

## **Appendix A**

### **Site Location Plan**

LEGEND

--- SITE BOUNDARY

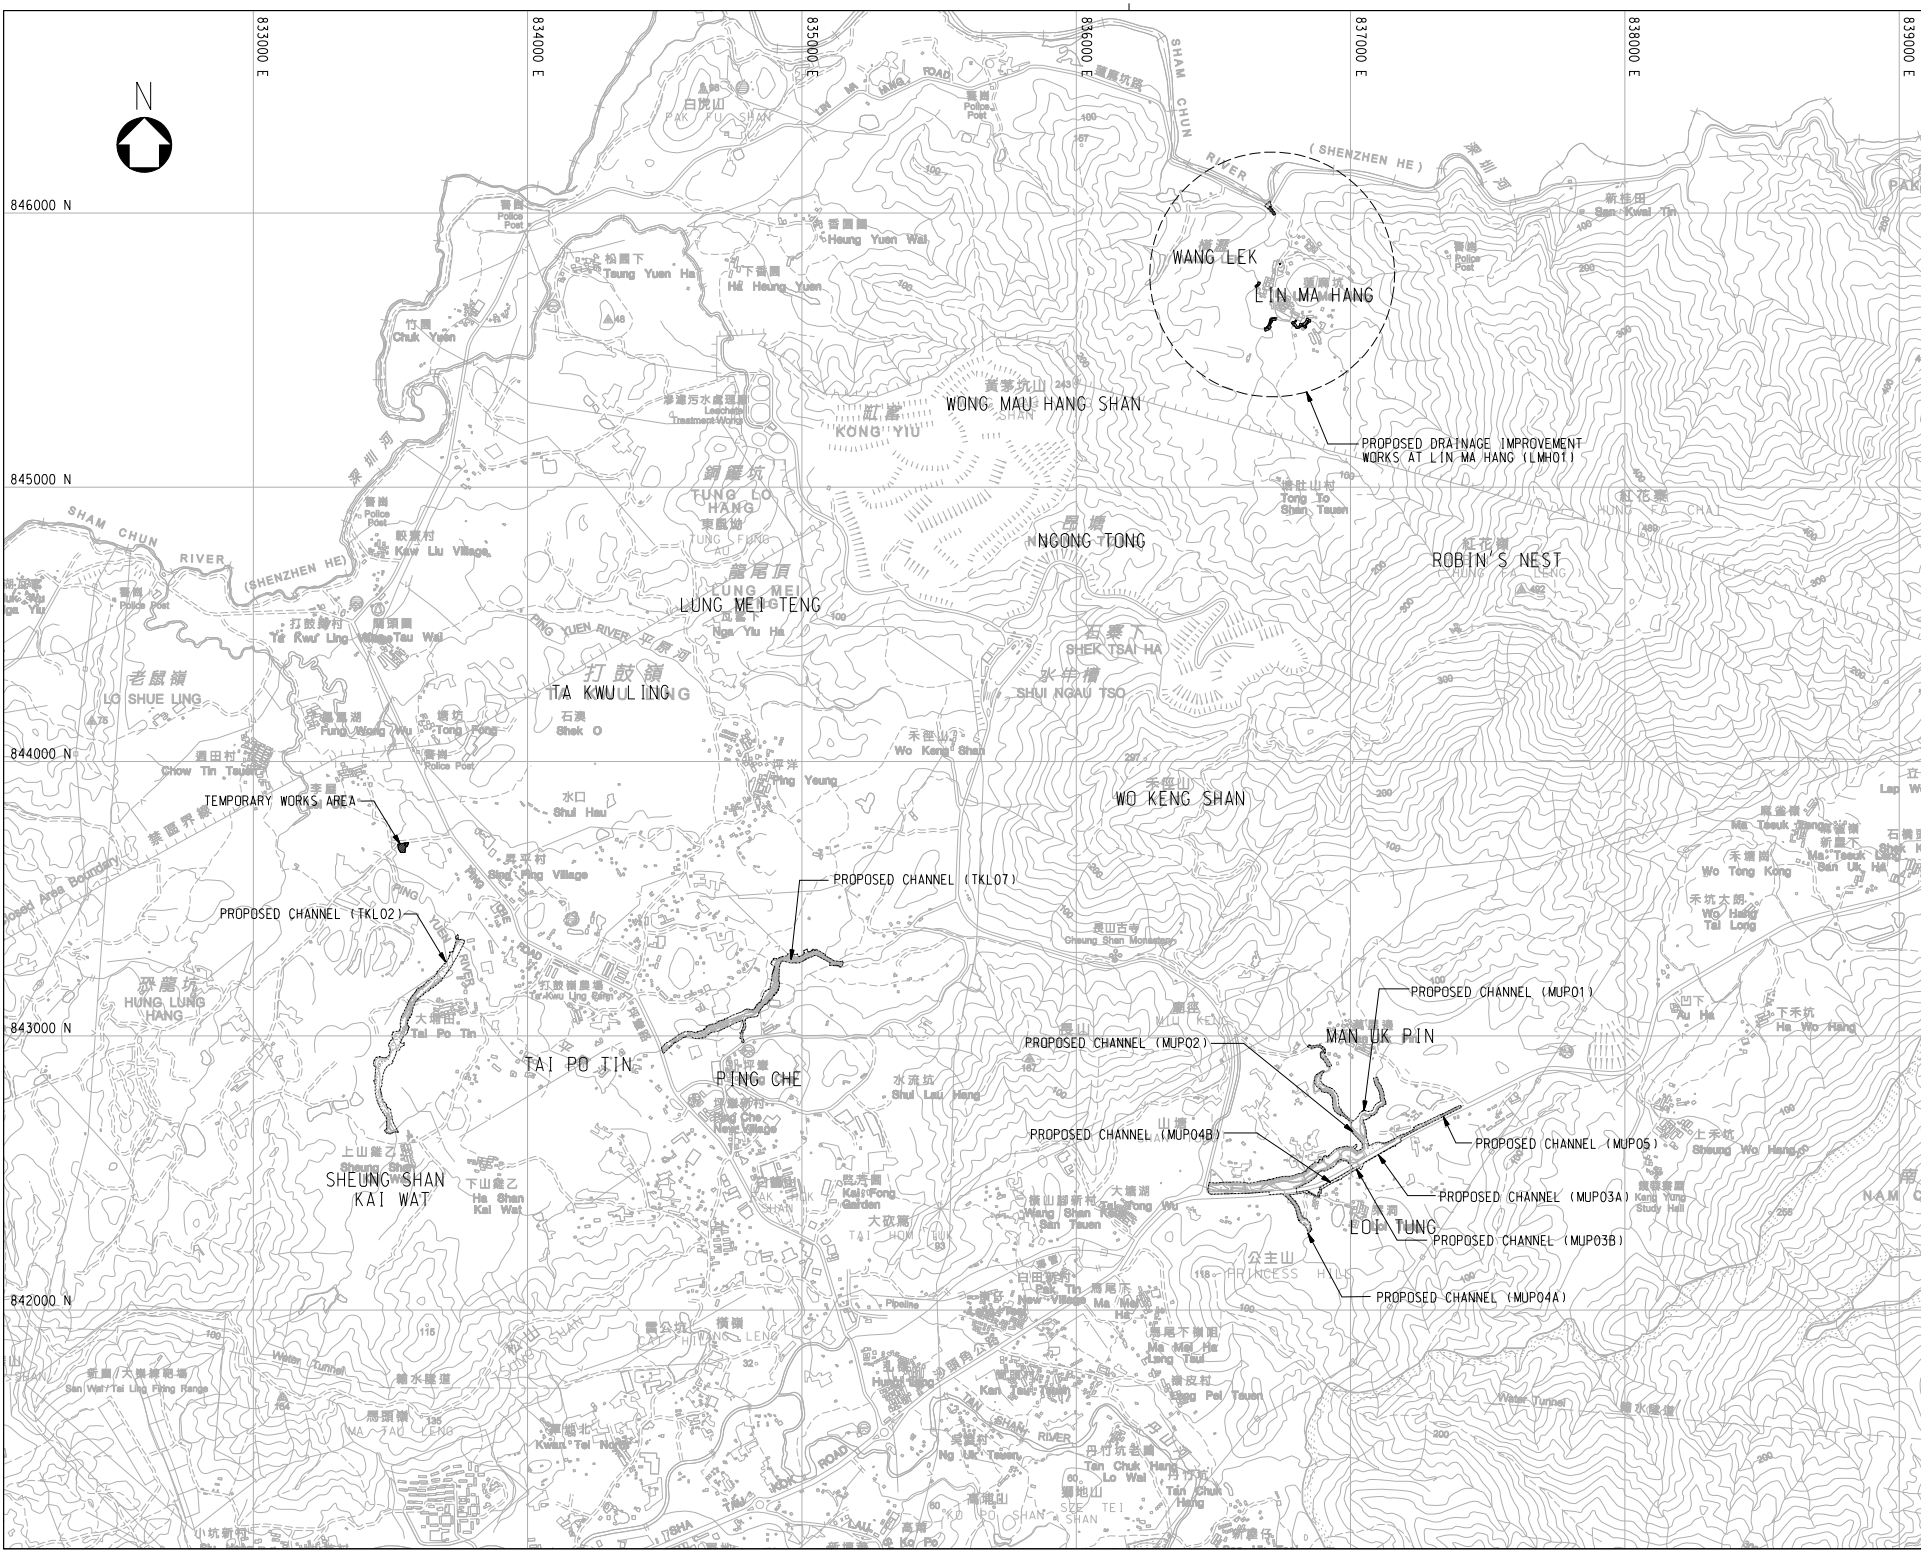

Revision	Date	Description	Initial
Initial	KSC	YSY	LHS
Date	05/07	05/07	05/07

Contract no. DC/2007/08

Contract title DRAINAGE IMPROVEMENT WORKS AT TAI PO TIN, PING CHE, MAN UK PIN AND LIN MA HANG

Drawing title LOCATION PLAN FOR PROPOSED CHANNELS IN TAI KWU LING AND SHA TAU KOK

Drawing no. 001 Scale A3 1:10000 A1 1:20000




BLACK & VEATCH HONG KONG LIMITED  
博威工程顧問有限公司



**Appendix B**

**Environmental Management Organization and  
Contacts of Key Personnel**

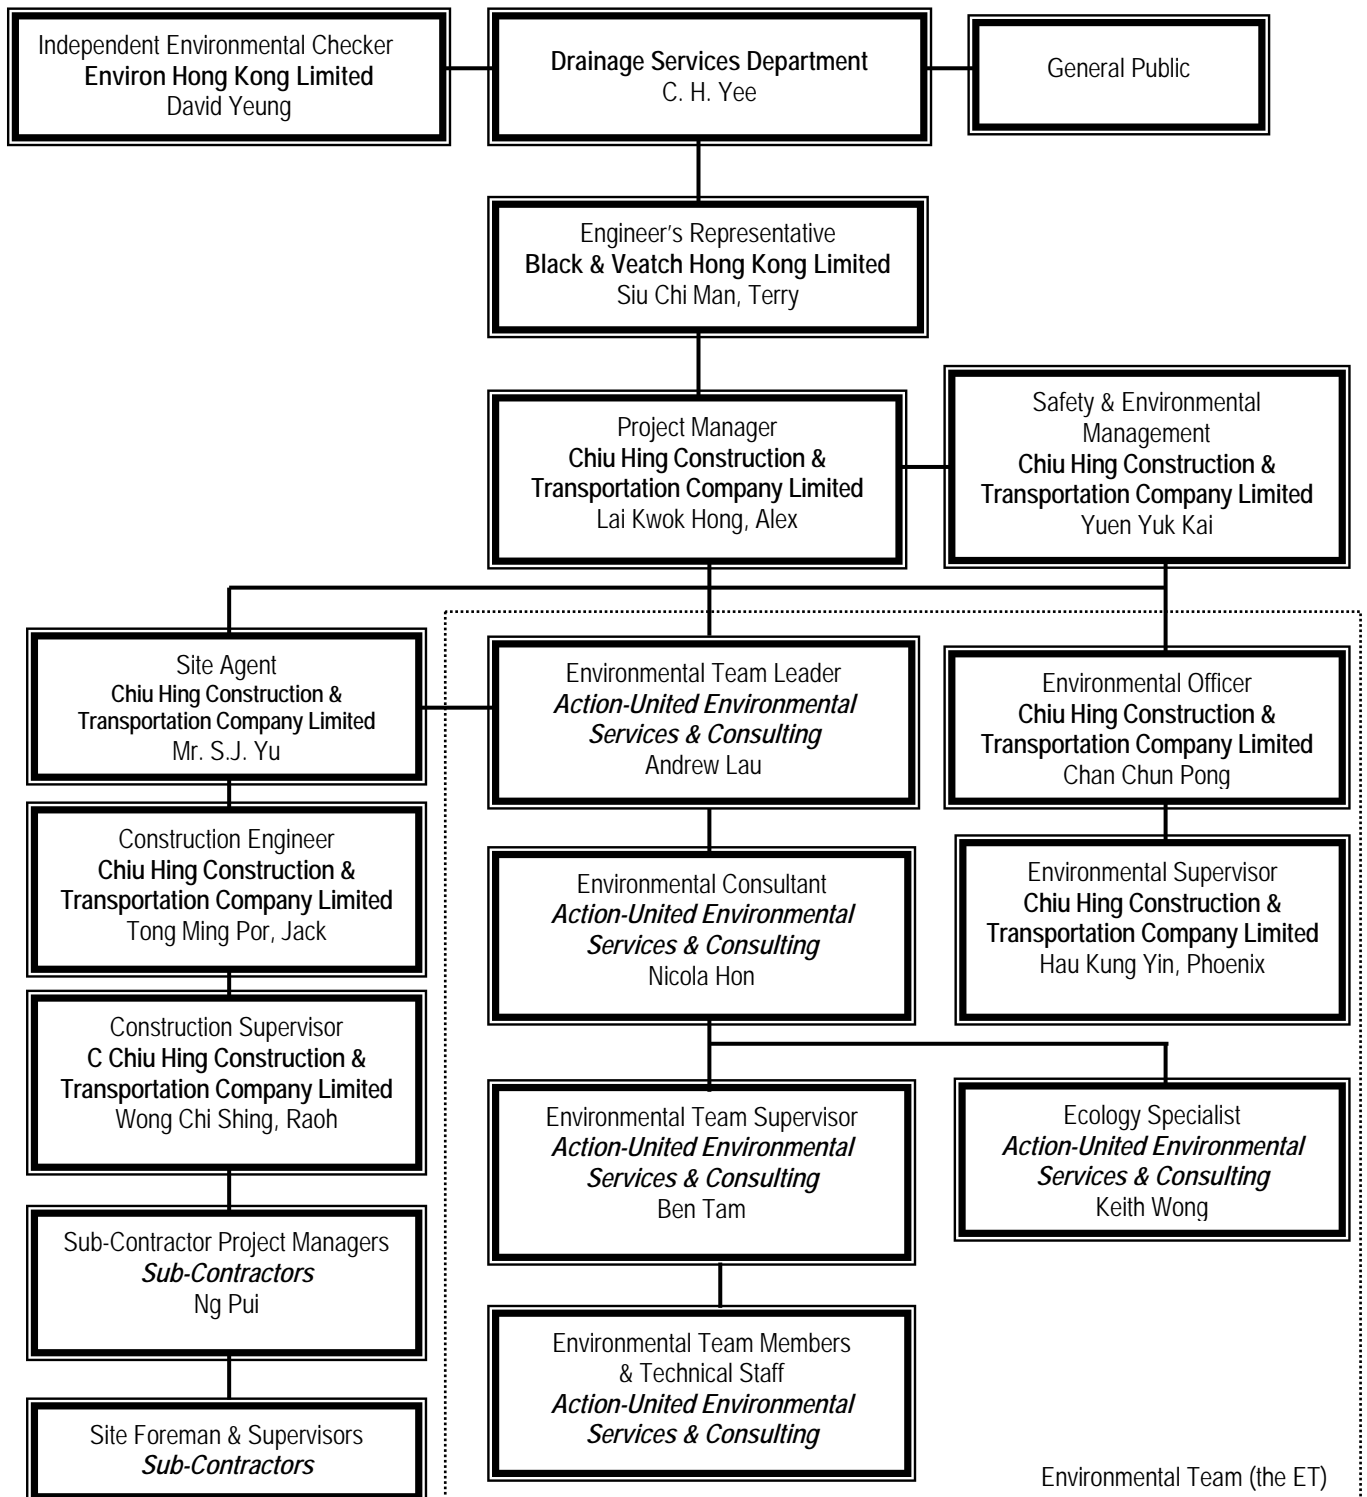

Environmental Management Organization

**Contact Details of Key Personnel**

<b>Organization</b>	<b>Project Role</b>	<b>Name of Key Staff</b>	<b>Tel No.</b>	<b>Fax No.</b>
DSD	Employer	Mr. C. H. Yee	2594-7347	2827-8700
B&V	Engineer's Representative	Mr. Siu Chi Man, Terry	2659-8787	2659-8323
Environ	Independent Environmental Checker	Mr. David Yeung	3743-0788	3548-6988
CHCT	Project Manager	Mr. Lai Kwok Hong, Alex	2659-8221	2659-8232
CHCT	Safety & Environmental Manager	Mr. Yuen Yuk Kai	2659-8221	2659-8232
CHCT	Site Agent	Mr. S.J. Yu	2659-8221	2659-8232
CHCT	Construction Engineer	Mr. Tong Ming Por, Jacky	2659-8221	2659-8232
CHCT	Construction Supervisor	Mr. Roah Wong	2659-8221	2659-8232
CHCT	Structural Engineer	Mr. Kwok Chin Ming	2659-8221	2659-8232
CHCT	Site Forman	Mr. Chung Ping Kai	2659-8221	2659-8232
CHCT	Environmental Officer	Mr. C. P. Chan	2659-8221	2659-8232
CHCT	Environmental Supervisor	Miss Phoenix Hau	2659-8221	2659-8232
Kin Tat	Sub-contractor Project Manager	Mr. Ng Pui	2659-8221	2659-8232
AUES	Environmental Team Leader	Mr. Andrew Lau	2959-6059	2959-6079
AUES	Environmental Consultant	Miss Nicola Hon	2959-6059	2959-6079
AUES	Environmental Team Supervisor	Mr. Ben Tam	2959-6059	2959-6079
AUES	Ecologist	Dr. Keith Wong	2959-6059	2959-6079

Legends:

*DSD (Employer) – Drainage Services Department*

*B&V (Engineer) – Black & Veatch Hong Kong Limited*

*CHCT (Main Contractor) – Chiu Hing Construction & Transportation Company Limited*

*Environ (IEC) – Environ Hong Kong Limited*

*AUES (ET) – Action-United Environmental Services & Consulting*

## **Appendix C**

# **Master Construction Program Future Construction Works & Environmental Mitigation Implementation Schedule**

### Three Month (08,09,10) Rolling Programme (No.19)

ID	Task Name	Duration	Start	Finish	August 2009		September 2009		October 2009		Nov	
					26 Jul	2 Aug	5 Aug	6 Au	13 Au	20 Sep		27 Sep
1	A: Seccion 1-Tai Po Tin (TKL02)	988 days	Wed 30/4/08	Wed 12/1/11								
2												
3	Open cut excavation	107 days	Tue 23/6/09	Wed 7/10/09								
4	Left Bank of G.W. Foundation CH710 to CH787	90 days	Tue 23/6/09	Sun 20/9/09								
5	Left Bank of G.W. Foundation CH669 to CH706	90 days	Tue 23/6/09	Sun 20/9/09								
6	Right Bank of G.W. Foundation CH507 to CH591	90 days	Fri 10/7/09	Wed 7/10/09								
7	Rock & granular filling for the base of gabion	170 days	Sun 2/8/09	Mon 18/1/10								
8	Blinding layer for the gabion construction	170 days?	Thu 3/9/09	Fri 19/2/10								
9	Backfilling and gabion construction by layers	200 days?	Mon 28/9/09	Thu 15/4/10								
10	Gabion block construction in the middle of the river	150 days	Tue 17/11/09	Thu 15/4/10								
11	<b>VBT02-1 &amp; FBT02-1 at CH507 approximate</b>	<b>120 days</b>	<b>Fri 10/7/09</b>	<b>Fri 6/11/09</b>								
12	VBT02-1 & FBT02-1 at CH507 approximate	10 days	Fri 10/7/09	Sun 19/7/09								
13	Excavation	20 days	Mon 20/7/09	Sat 8/8/09								
14	Rock & granular filling for the base of the FB & VB	20 days	Sun 9/8/09	Fri 28/8/09								
15	Blinding layer for the FB & VB	20 days	Sat 29/8/09	Thu 17/9/09								
16	Formwork & concreting for the FB & VB	50 days	Fri 18/9/09	Fri 6/11/09								
17												
18	<b>B. Section 2 &amp; 5 - Ping Che (TKL07).</b>	<b>1226 days?</b>	<b>Fri 21/12/07</b>	<b>Fri 29/4/11</b>								
19												
20	Diversion for CLP poles at Channel TKL07 (around CH220)	151 days?	Tue 26/5/09	Fri 23/10/09								
21	Identification of Conflicted Electrical poles, liaison with CLP Diversion	7 days?	Tue 26/5/09	Mon 1/6/09								
22	Waiting for CLP's Diversion Preparation	90 days?	Tue 2/6/09	Sun 30/8/09								
23	Diversion of Conflicted Electrical Poles by CLP	54 days?	Mon 31/8/09	Fri 23/10/09								
24	<b>Main River Construction (CH270 to CH670)</b>	<b>170 days</b>	<b>Tue 19/5/09</b>	<b>Wed 4/11/09</b>								
25	Temporary Flow Diversion	25 days	Tue 19/5/09	Fri 12/6/09								
26	<b>Open cut excavation</b>	<b>120 days</b>	<b>Mon 1/6/09</b>	<b>Mon 28/9/09</b>								
27	Left Bank of G.W. Foundation CH125 to CH228	120 days	Mon 1/6/09	Mon 28/9/09								
28	Left Bank of G.W. Foundation CH552 to CH687	120 days	Mon 1/6/09	Mon 28/9/09								
29	Rock & granular filling for the base of gabion	60 days	Tue 23/6/09	Fri 21/8/09								
30	Blinding layer for the gabion construction	60 days	Fri 3/7/09	Mon 31/8/09								
31	Backfilling and gabion construction by layers	75 days	Mon 13/7/09	Fri 25/9/09								
32	Gabion block construction in the middle of the river	80 days	Mon 17/8/09	Wed 4/11/09								
33	<b>River associated Works</b>	<b>281 days?</b>	<b>Thu 30/4/09</b>	<b>Thu 4/2/10</b>								
34	<b>Box culvert construction at CH230 approximate</b>	<b>170 days</b>	<b>Thu 30/4/09</b>	<b>Fri 16/10/09</b>								
35	Temporary flow diversion	20 days	Thu 30/4/09	Tue 19/5/09								

Task  
 Split  
 Progress  
 Milestone  
 Summary  
 Project Summary  
 External Tasks  
 External Milestone  
 Deadline

Project: Project 4-R (No. 19)  
 Date: Wed 29/7/09

Chiu Hing Construction & Transportation Co. Ltd.  
 Contract No. DC/2007/08  
 Contract Name : Drainage Improvement Works at Tai Po Tin, Pin Che, Man Uk Pin and Lin Ma Hang

### Three Month (08,09,10) Rolling Programme (No.19)

ID	Task Name	Duration	Start	Finish	August 2009			September 2009			October 2009			Nov
					26 Jul	2 Aug	6 Aug	6 Au	13 Au	20 Au	27 Au	4 Oct	11 Oct	
36	Open cut excavation	30 days	Wed 20/5/09	Thu 18/6/09										
37	Granular filling with geotextile filter	30 days	Fri 19/6/09	Sat 18/7/09										
38	Concrete for blinding layer	20 days	Mon 29/6/09	Sat 18/7/09										
39	Base slab construction	70 days	Thu 9/7/09	Wed 16/9/09										
40	Wall & Top Slab construction	70 days	Sun 19/7/09	Sat 26/9/09										
41	Backfilling	20 days	Sun 27/9/09	Fri 16/10/09										
42	<b>FBT07-1 at CH 35 approximate</b>	110 days	Tue 1/9/09	Sat 19/12/09										
43	Excavation	20 days	Tue 1/9/09	Sun 20/9/09										
44	Rock & granular filling for the base of the FB	20 days	Mon 21/9/09	Sat 10/10/09										
45	Blinding layer for the FB	20 days	Sun 11/10/09	Fri 30/10/09										
46	Formwork & concreting	50 days	Sat 31/10/09	Sat 19/12/09										
47	<b>FBT07-2 at CH250 approximate</b>	105 days	Mon 1/6/09	Sun 13/9/09										
48	Excavation	15 days	Mon 1/6/09	Mon 15/6/09										
49	Rock & granular filling for the base of the FB	15 days	Tue 16/6/09	Tue 30/6/09										
50	Blinding layer for the FB	15 days	Wed 17/09	Wed 15/7/09										
51	Formwork & concreting	30 days	Thu 16/7/09	Fri 14/8/09										
52	Construction of Gabion Transition (CH228, CH250)	30 days	Sat 15/8/09	Sun 13/9/09										
53	<b>Box culvert &amp; FBT07-6 construction at (CH670 to CH838 approximate)</b>	270 days?	Mon 11/5/09	Thu 4/2/10										
54	Box culvert (CH688 to CH762) & FBT07-6 completed & handed over	1 day?	Mon 11/5/09	Mon 11/5/09										
55	Open cut excavation (CH762 to CH838)	20 days	Thu 30/7/09	Tue 18/8/09										
56	Granular filling with geotextile filter	30 days	Wed 19/8/09	Thu 17/9/09										
57	Concrete for blinding layer	30 days	Fri 18/9/09	Sat 17/10/09										
58	Base slab construction	20 days	Sun 18/10/09	Fri 6/11/09										
59	Wall & Top Slab construction	70 days	Wed 28/10/09	Tue 5/1/10										
60	Backfilling	70 days	Sat 7/11/09	Fri 15/1/10										
61	<b>FBT07-3 at CH317 approximate</b>	20 days	Sat 16/1/10	Thu 4/2/10										
62	Excavation	75 days	Thu 18/6/09	Mon 31/8/09										
63	Rock & granular filling for the base of the FB	15 days	Thu 18/6/09	Thu 27/09										
64	Blinding layer for the FB	15 days	Fri 3/7/09	Fri 17/7/09										
65	Formwork & concreting	15 days	Sat 18/7/09	Sat 18/8/09										
66	<b>FBT07-4 at CH445 approximate</b>	30 days	Sun 28/09	Mon 31/8/09										
67	Excavation	110 days	Thu 3/9/09	Mon 21/12/09										
68	Rock & granular filling for the base of the FB	20 days	Thu 3/9/09	Tue 22/9/09										
69	Blinding layer for the FB	20 days	Wed 23/9/09	Mon 12/10/09										
70	Formwork & concreting	20 days	Tue 13/10/09	Sun 1/11/09										

Task  
 Split  
 Progress  
 Milestone  
 Summary  
 Project Summary  
 External Tasks  
 External Milestone  
 Deadline

### Three Month (08,09,10) Rolling Programme (No.19)

ID	Task Name	Duration	Start	Finish	2009									
					Jul	Aug	Sep	Oct	Nov					
71	Formwork & concreting	50 days	Mon 21/1/09	Mon 21/1/2009										
72	<b>FBT07-5 at CH600 approximate</b>	110 days	Mon 20/7/09	Fri 6/11/09										
73	Excavation	20 days	Mon 20/7/09	Sat 8/8/09										
74	Rock & granular filling for the base of the FB	20 days	Sun 9/8/09	Fri 28/8/09										
75	Blinding layer for the FB	20 days	Sat 29/8/09	Thu 17/9/09										
76	Formwork & concreting	50 days	Fri 18/9/09	Fri 6/11/09										
77														
78	<b>C: Section 3 - Man Uk Ping (Portion D &amp; E)</b>	1226 days?	Fri 21/12/07	Fri 29/4/11										
79														
80	<b>1. River MUP01 (Portion D)</b>	429 days?	Mon 2/2/09	Tue 6/4/10										
81	Open cut excavation of Left Bank of G.W. Foundation CH0 to CH03	30 days	Mon 29/6/09	Tue 28/7/09										
82	Rock & granular filling for the base of gabion	100 days	Thu 9/7/09	Fri 16/10/09										
83	Blinding layer for the gabion construction	100 days	Sun 19/7/09	Mon 26/10/09										
84	Backfilling and gabion construction by layers	180 days	Wed 29/7/09	Sun 24/11/10										
85														
86	<b>2. River MUP02 (Portion D)</b>	294 days	Mon 13/4/09	Sun 31/1/10										
87	Stabilise existing river bank	225 days	Mon 13/4/09	Mon 23/11/09										
88	Excavate & erect shoring support	30 days	Wed 13/5/09	Thu 11/6/09										
89	Rock & granular filling for the base of gabion	30 days	Fri 12/6/09	Sat 11/7/09										
90	Blinding layer for the gabion construction	30 days	Sun 12/7/09	Mon 10/8/09										
91	Backfilling and gabion construction by layers	95 days	Tue 11/8/09	Fri 13/11/09										
92														
93	<b>3. Main River of MUP03</b>	294 days?	Mon 13/4/09	Sun 31/1/10										
94	Boundary Wall Construction approximate CHB575 to CHC653 & CHC304 to CHC 360	100 days	Tue 21/7/09	Wed 28/10/09										
99	Excavation	20 days	Tue 21/7/09	Sun 9/8/09										
100	Rock & granular filling for the base of the FB	20 days	Mon 10/8/09	Sat 29/8/09										
101	Blinding layer for the FB	20 days	Sun 30/8/09	Fri 18/9/09										
102	Formwork & concreting	40 days	Sat 19/9/09	Wed 28/10/09										
103	Open cut excavation	60 days	Mon 27/4/09	Thu 25/6/09										
104	Rock & granular filling for the base of gabion	60 days	Thu 7/5/09	Sun 5/7/09										
105	Blinding layer for the gabion construction	60 days	Sun 17/5/09	Wed 15/7/09										
106	Backfilling and gabion construction by layers	90 days	Wed 27/5/09	Mon 24/8/09										
107	Gabion block construction in the middle of the river	90 days	Sat 6/6/09	Thu 3/9/09										
108														
109	<b>4. River MUP05 (Portion D)</b>	610 days?	Sat 14/3/09	Sat 13/11/10										

Task  
 Split  
 Progress  
 Milestone  
 Summary  
 Project Summary  
 External Tasks  
 External Milestone  
 Deadline

### Three Month (08,09,10) Rolling Programme (No.19)

ID	Task Name	Duration	Start	Finish	2009																					
					Jul	Aug	Sep	Oct	Nov																	
110	Main River Construction (CH C 0+00 to 0+974)	340 days?	Sat 14/3/09	Tue 16/2/10	26	Jul	2	Aug	9	6	Au	10	6	Sep	13	20	Sep	27	4	18	Oct	18	25	Oct	1	Nov
111	Open cut excavation	150 days	Thu 23/4/09	Sat 19/9/09																						
112	Left Bank of G.W. Foundation CH650 to CH760	150 days	Thu 23/4/09	Sat 19/9/09																						
113	Left Bank of G.W. Foundation CH960 to CH990	150 days	Thu 23/4/09	Sat 19/9/09																						
114	Rock & granular filling for the base of gabion	120 days	Sun 20/9/09	Sun 17/1/10																						
115	Blinding layer for the gabion construction	120 days	Mon 18/1/10	Mon 17/5/10																						
116	Backfilling and gabion construction by layers	200 days	Thu 28/1/10	Sun 15/8/10																						
117																										
118	5. River MUP05 (Portion E)	803 days?	Mon 16/2/09	Fri 29/4/11																						
119	Rectangular Channel	85 days	Sun 3/5/09	Sun 26/7/09																						
120	Rock & granular filling for the base of gabion	20 days	Sun 3/5/09	Fri 22/5/09																						
121	Blinding layer for the gabion construction	20 days	Wed 13/5/09	Mon 1/6/09																						
122	Base slab construction	30 days	Sat 23/5/09	Sun 21/6/09																						
123	Wall construction	45 days	Tue 2/6/09	Thu 16/7/09																						
124	Granular filling inside the channel	10 days	Fri 17/7/09	Sun 26/7/09																						
125	Gabion Construction	260 days	Sun 3/5/09	Sun 17/1/10																						
126	Rock & granular filling for the base of gabion	30 days	Sun 3/5/09	Mon 1/6/09																						
127	Blinding layer for the gabion construction	30 days	Wed 13/5/09	Thu 11/6/09																						
128	Backfilling and gabion construction by layers	120 days	Sat 23/5/09	Sat 19/9/09																						
129	Gabion block construction in the middle of the river	120 days	Sat 1/8/09	Sat 28/11/09																						
130	200 Rip Rap filling	50 days	Sun 29/11/09	Sun 17/1/10																						
131																										
132	Wo Keng Shan Garden	1 day?	Mon 25/5/09	Mon 25/5/09																						
133	Tree Transplanted & Handed Over for One year maintenance	1 day?	Mon 25/5/09	Mon 25/5/09																						
134																										
135	D. Section 4 & 5 of Works - LMH (Portion F)	1095 days?	Fri 21/12/07	Sun 19/12/10																						

Task  
 Split  
 Progress  
 Milestone  
 Summary  
 Project Summary  
 External Tasks  
 External Milestone  
 Deadline



## **Environmental Mitigation Implementation Schedule**

Implementation Schedule of Water Quality Impact Assessment

ES Ref	EM&A Ref	Environmental Protection Measures	Objectives of the Recommended Measures and Main Concerns to addressed	Location / Timing	Implementation Agent	Implementation Stages *			Relevant Legislation & Guidelines
						D	C	O	
<b>Water Quality - Construction Phase</b>									
**	4.9.2	The Contractor shall observe and comply with the Water Pollution Control Ordinance and its subsidiary regulations. The Contractor shall carry out the Works in such a manner as to minimize adverse impacts on the water quality during execution of the works. In particular he shall arrange his method of working to minimize the effect on the water quality within and outside the Site and on the transport routes.	To minimize adverse water quality impact during construction	All works site / during construction	Construction Contractor		√		Water Pollution Control Ordinance
**	4.9.3	Proper site management measures shall be implemented to control site runoff and drainage, and thereby prevent high sediment loadings from reaching downstream sections of the river and adjacent agricultural land. The Contractor shall follow the practices, and be responsible for the design, construction and maintenance of all the mitigation measures as specified in ProPECC PN 1/94 "Construction Site Drainage". The design of the mitigation measures shall be submitted by the Contractor to the Engineer for approval. These mitigation measures shall include the following practices to minimize site surface runoff and the chance of erosion, and also to retain and reduce any suspended solids prior to discharge:  (i) Before commencing any site formation work, all sewer and drainage connections	To minimize adverse water quality impact during construction	All works site / during construction	Construction Contractor		√		Water Pollution Control Ordinance ProPECC PN 1/94

ES Ref	EM&A Ref	Environmental Protection Measures	Objectives of the Recommended Measures and Main Concerns to addressed	Location / Timing	Implementation Agent	Implementation Stages *			Relevant Legislation & Guidelines
						D	C	O	
		<p>shall be sealed to prevent debris, soil, sand etc. from entering public sewers / drains.</p> <p>(ii) Provision of perimeter channels to intercept storm-runoff from outside the site. These shall be constructed in advance of site formation works and earthworks.</p> <p>(iii) Temporary ditches such as channels, earth bunds or sand bag barriers shall be included to facilitate runoff discharge into the stormwater drain, via a sand/silt basin/trap.</p> <p>(iv) Works programmes shall be designed to minimize works areas at any one time, thus minimizing exposed soil areas and reducing the potential for increased siltation and runoff.</p> <p>(v) Sand/silt removal facilities such as sand traps, silt traps and sediment basins shall be provided to remove the sand/silt particles from run-off. These facilities shall be properly and regularly cleaned and maintained. These facilities shall be carefully planned to ensure that they would be installed at appropriate locations to capture all surface water generated on site.</p> <p>(vi) Carefully programming of the works to</p>							

ES Ref	EM&A Ref	Environmental Protection Measures	Objectives of the Recommended Measures and Main Concerns to addressed	Location / Timing	Implementation Agent	Implementation Stages *			Relevant Legislation & Guidelines
						D	C	O	
**	4.9.4	<p>minimize excavation works during the rainy season.</p> <p>(vii) Temporary access roads shall be protected by crushed gravel and exposed slope surfaces shall be protected when rainstorms are likely.</p> <p>(viii) Open stockpiles of construction materials on-site shall be covered with tarpaulin or similar fabric during rainstorms to prevent erosion.</p> <p>The use of containment structures and diversion channels is recommended wherever practicable to facilitate a dry or at least confined excavation within watercourses. By limiting or confining the works areas the extent of disturbance to the surrounding water bodies will be significantly reduced, and thus resulting impacts on water quality from sediment resuspension will be reduced. Furthermore, excavation works shall be carried out during periods of low flow (dry season) as far as possible to minimize impacts on downstream water quality and sensitive receivers.</p>	To minimize adverse water quality impact during construction	All works site / during construction	Construction Contractor		√		Water Pollution Control Ordinance ProPECC PN 1/94
**	4.9.5	Portable toilets shall be provided by the Contractors, where necessary, to handle sewage from the workforce. To prevent spillage of fuels and solvents to water courses, all fuel tanks and storage areas shall be sited on sealed areas, within bunds of a capacity equal to 110% of the storage capacity of the largest tank.	To minimize adverse water quality impact during construction	All works site / during construction	Construction Contractor		√		Water Pollution Control Ordinance ProPECC PN 1/94
**	4.9.6	The Contractor shall not discharge directly or	To minimize adverse	All works site /	Construction		√		Water Pollution

ES Ref	EM&A Ref	Environmental Protection Measures	Objectives of the Recommended Measures and Main Concerns to addressed	Location / Timing	Implementation Agent	Implementation Stages *			Relevant Legislation & Guidelines
						D	C	O	
		indirectly or cause or permit or suffer to be discharged into any public sewer, stormwater drain, channel, stream-course or sea any trade effluent or foul or contaminated water or cooling or hot water without the prior written consent of the Engineer in consultation with the Director of Environmental Protection and Director of Water Supplies, who may as a condition of granting his consent require the Contractor to provide, operate and maintain at the Contractor's own expense to the satisfaction of the Engineer suitable works for the treatment and disposal of such trade effluent or foul or contaminated or cooling or hot water. The design of such treatment works shall be submitted to the Engineer for approval not less than one month before the commencement of the relevant works.	water quality impact during construction	during construction	Contractor				Control Ordinance ProPECC PN 1/94
**	4.9.7	If any office, site canteen or toilet facilities is erected, foul water effluent shall be directly to a foul sewer or to a sewage treatment and disposal facility either directly or indirectly by means of pumping or other means approved by the Engineer.	To minimize adverse water quality impact during construction.	All works site / during construction	Construction Contractor		√		Water Pollution Control Ordinance ProPECC PN 1/94

D = Design, C = Construction, O = Operation

Implementation Schedule of Waste

ES Ref	EM&A Ref	Environmental Protection Measures	Objectives of the Recommended Measures and Main Concerns to addressed	Location / Timing	Implementation Agent	Implementation Stages *			Relevant Legislation & Guidelines
						D	C	O	
<b>Waste - Construction Phase</b>									
7.5.2	5.1.2	<p><i>General</i></p> <p>Upon appointment, the main contractor of each construction contract should prepare and implement an Environmental Management Plan (EMP) in accordance with ETWB TCW No. 19/2005 – Environmental Management on Construction Sites which should include among other environmental nuisances abatement measures the arrangements for avoidance, reuse, recovery, recycling, storage, collection, treatment and disposal of different categories of waste to be generated from the construction activities. Such a management plan should incorporate site specific factors, such as the designation of areas for segregation and temporary storage of reusable and recyclable materials. The EMP should be submitted to the Engineer for approval. The contractor should implement the waste management practices in the EMP throughout the construction stage of the Project. The EMP should be reviewed regularly and updated (preferably monthly) by the contractor. The EMP should take into account the recommended mitigation measures in the ES Report.</p>	Waste reduction, reuse, recycle and proper disposal of waste	All works site / during construction	Construction Contractor		√		Waste Disposal Ordinance ETWB TCW No. 19/2005

ES Ref	EM&A Ref	Environmental Protection Measures	Objectives of the Recommended Measures and Main Concerns to addressed	Location / Timing	Implementation Agent	Implementation Stages *			Relevant Legislation & Guidelines
						D	C	O	
7.5.3	5.1.3	The contractor also should refer to the Construction and Demolition Material Management Plan (C&DMMP) conducted under the Project when preparing the EMP.	Waste reduction, reuse, recycle and proper disposal of waste	All work sites / during construction	Construction Contractor		√		Waste Disposal Ordinance ETWB TCW No. 19/2005
7.5.4	5.1.4	Training of construction staff should be undertaken by the contractor about the concept of site cleanliness and appropriate waste management procedures. The contractor should develop and provide toolbox talk for on-site sorting of C&D materials to enhance worker's awareness in handling, sorting, reuse and recycling of C&D materials. Requirements for staff training should be included in the EMP.	Waste reduction, reuse, recycle and proper disposal of waste	All work sites / during construction	Construction Contractor		√		Waste Disposal Ordinance ETWB TCW No. 19/2005
7.5.5	5.1.5	Good planning and site management practice should be employed to eliminate over ordering or mixing of construction materials to reduce wastage. Proper storage and site practices will minimise the damage or contamination of construction materials.	Waste reduction, reuse, recycle and proper disposal of waste	All work sites / during construction	Construction Contractor		√		Waste Disposal Ordinance ETWB TCW No. 19/2005
7.5.6	5.1.6	Where waste generation is unavoidable, the potential for recycling or reuse should be rigorously explored. If wastes cannot be recycled, disposal routes as described below should be followed. A recording system for the amount of wastes generated, recycled and disposed (including the disposal sites) should be implemented. In order to monitor the disposal of C&D materials and solid wastes at public filling	Waste reduction, reuse, recycle and proper disposal of waste	All work sites / during construction	Construction Contractor		√		Waste Disposal Ordinance ETWB TCW No. 31/2004

ES Ref	EM&A Ref	Environmental Protection Measures	Objectives of the Recommended Measures and Main Concerns to addressed	Location / Timing	Implementation Agent	Implementation Stages *			Relevant Legislation & Guidelines
						D	C	O	
7.5.7	5.1.7	facilities and landfills and to control fly-tipping, a trip-ticket system should be included. One may make reference to ETWB TCW No. 31/2004 for details.  Regular cleaning and maintenance of the waste storage area should be provided.	Waste reduction, reuse, recycle and proper disposal of waste	All work sites / during construction	Construction Contractor		√		Waste Disposal Ordinance  ETWB TCW No. 19/2005
7.5.8	5.1.8	<i>On-site Sorting, Reuse and Recycling</i>  All waste materials should be segregated into categories covering: <ul style="list-style-type: none"> <li>• excavated materials suitable for reuse on-site;</li> <li>• excavated materials suitable for public filling facilities;</li> <li>• remaining C&amp;D waste for landfill;</li> <li>• chemical waste; and</li> <li>• general refuse for landfill.</li> </ul>	Waste reduction, reuse, recycle and proper disposal of waste	All work sites / during construction	Construction Contractor		√		Waste Disposal Ordinance  ETWB TCW No. 19/2005
7.5.9	5.1.9	Proper segregation and disposal of construction waste should be implemented. Separate containers should be provided for inert and non-inert wastes.	Waste reduction, reuse, recycle and proper disposal of waste	All work sites / during construction	Construction Contractor		√		Waste Disposal Ordinance  ETWB TCW No. 19/2005
7.5.10	5.1.10	Sorting is important to recover materials for reuse and recycling. Specific area should be allocated for on-site sorting of C&D materials and to	Waste reduction, reuse, recycle and proper disposal of waste	All work sites / during construction	Construction Contractor		√		Waste Disposal Ordinance



ES Ref	EM&A Ref	Environmental Protection Measures	Objectives of the Recommended Measures and Main Concerns to addressed	Location / Timing	Implementation Agent	Implementation Stages *			Relevant Legislation & Guidelines
						D	C	O	
7.5.11	5.1.11	<p>provide a temporary storage area for those sorted materials such as metals, concrete, timber, plastics, glass, excavated spoils, bricks / tiles and waste papers. If area is limited, all C&amp;D materials should at least be sorted on-site into inert and non-inert component. Non-inert materials (C&amp;D waste) such as bamboo, timber, vegetation, packaging waste and other organic materials should be reused and recycled wherever possible and disposed of to designated landfill only as a last resort. Inert materials (public fill) such as concrete, stone, clay, brick, soil, asphalt and the like should be separated and reuse in this or other projects (subject to approval by the relevant parties in accordance with the ETWB TCW No. 31/2004) before disposed of at a public filling facility operated by Civil Engineering and Development Department (CEDD). Steel and other metals should be recovered from demolition waste stream and recycled.</p> <p>The reuse of inert materials such as soil, rock and broken concrete should be maximised. Waste should be separated into fine, soft and hard materials. With the use of a crusher coarse material can be crushed to make it suitable for use as fill material where fill is required in the works. This minimises the use of imported material and maximises use of the C&amp;D material produced.</p>	<p>waste</p> <p>Waste reduction, reuse, recycle and proper disposal of waste</p>	All work sites / during construction	Construction Contractor		√		<p>ETWB TCW No. 19/2005, 31/2004</p> <p>Waste Disposal Ordinance</p> <p>ETWB TCW No. 19/2005</p>

ES Ref	EM&A Ref	Environmental Protection Measures	Objectives of the Recommended Measures and Main Concerns to addressed	Location / Timing	Implementation Agent	Implementation Stages *			Relevant Legislation & Guidelines
						D	C	O	
7.5.12	5.1.12	Prior to export of material from the site, the potential for it to be reused should be assessed. With the exception of excavated clay most C&D material can easily be reused. Waste separation methods should be followed to ensure that C&D waste is separated at source. Suitable soft materials should be used for landscaping and grading of embankments. Fine material should be separated out and used as topsoil.	Waste reduction, reuse, recycle and proper disposal of waste	All work sites / during construction	Construction Contractor		√		Waste Disposal Ordinance ETWB TCW No. 19/2005
7.5.13	5.1.13	The feasibility of using recycled aggregates in lieu of virgin materials should be rigorously considered during the detailed design and construction stages as stipulated in WBTC No. 12/2002 and ETWB TCW No. 24/2004. In general, recycled aggregates are suitable for use as fill materials in earthworks, road sub-base formation, and drainage works. Recycled aggregates can also be used in concrete (up to Grade 35) for mass concrete walls and other minor structures such as planter boxes, toe wall planters and pavement, etc.	Waste reduction, reuse, recycle and proper disposal of waste	All work sites / during construction	Construction Contractor		√		Waste Disposal Ordinance ETWB TCW No. 19/2005, 24/2004 WBTC No. 12/2002
7.5.14	5.1.14	Recycled inert C&D material should be used in the works as sub-bases for access roads and footpaths of the proposed channels. Recycled aggregates should be considered for use in concrete as outlined in the above mentioned technical circulars. Some recycled rock material can be reused in the gabions, as rock fill or as	Waste reduction, reuse, recycle and proper disposal of waste	All work sites / during construction	Construction Contractor		√		Waste Disposal Ordinance ETWB TCW No. 19/2005

ES Ref	EM&A Ref	Environmental Protection Measures	Objectives of the Recommended Measures and Main Concerns to addressed	Location / Timing	Implementation Agent	Implementation Stages *			Relevant Legislation & Guidelines
						D	C	O	
		stream bed material. This is dependent on size of rock fragments but can be achieved by appropriate use of a crusher.							
7.5.15	5.1.15	<p><i>Site Clearance / Demolition Materials</i></p> <p><i>Excavated Materials</i></p> <p>All C&amp;D materials should be sorted on-site into inert and non-inert components by the contractor. Non inert materials (C&amp;D waste) such as wood, glass and plastic should be reuse and recycle before disposal to a designated landfill as a last resort (currently assume to be the nearby NENT Landfill). Inert materials (public fill) such as soil, rubble, sand, rock, brick and concrete should be separated and where appropriate broken down to size suitable for subsequent filling. Inert materials should be reused on-site or in other projects approved by relevant parties in accordance with the ETWB TCW No. 31/2004 before disposed of at public filling facilities. Steel and other metals should be recovered from C&amp;D materials and recycled.</p>	Waste reuse, proper waste reduction, recycle and disposal of	All work sites / during construction	Construction Contractor		√		<p>Waste Disposal Ordinance</p> <p>ETWB TCW No. 19/2005, 31/2004</p>
7.5.16	5.1.16	Excavated sediment from existing stream should be reuse on-site as backfilling material.	Waste reuse, proper waste reduction, recycle and disposal of	All work sites / during construction	Construction Contractor		√		<p>Waste Disposal Ordinance</p> <p>ETWB TCW No. 19/2005</p>
7.5.17	5.1.17	Good quality reusable topsoil should be stockpiled for later landscaping works. Stockpiles	Waste reuse, proper waste reduction, recycle and disposal of	All work sites / during	Construction Contractor		√		<p>Waste Disposal Ordinance</p>

ES Ref	EM&A Ref	Environmental Protection Measures	Objectives of the Recommended Measures and Main Concerns to addressed	Location / Timing	Implementation Agent	Implementation Stages *			Relevant Legislation & Guidelines
						D	C	O	
7.5.18	5.1.18	<p>should be less than 2 m in height, formed to a safe angle of repose and hydroseeded or covered with tarpaulin to prevent erosion during the rainy season and to minimize dust generation.</p> <p>Control measures for temporary stockpiles on-site should be taken in order to minimize the noise, generation of dust, pollution of water and visual impact. These measures include:</p> <ul style="list-style-type: none"> <li>• surface of stockpiled soil should be regularly wetted with water especially during dry season;</li> <li>• disturbance of stockpiled soil should be minimized;</li> <li>• stockpiled soil should be properly covered with tarpaulins especially heavy rain storms are predicted;</li> <li>• stockpiling areas should be enclosed where space is available;</li> <li>• stockpiling location should be away from the water bodies; and</li> <li>• an independent surface water drainage system equipped with silt traps should be installed at the stockpiling area.</li> </ul>	<p>proper disposal of waste</p> <p>Waste reduction, reuse, recycle and proper disposal of waste</p>	<p>construction</p> <p>All work sites / during construction</p>	Construction Contractor		√		<p>ETWB TCW No. 19/2005</p> <p>Waste Disposal Ordinance</p> <p>ETWB TCW No. 19/2005</p>
7.5.19	5.1.19	The Public Fill Committee (PFC) of CBDD should be consulted on designated outlets (e.g.	Waste reduction, reuse, recycle and	All work sites / during	Construction Contractor		√		Waste Disposal Ordinance

ES Ref	EM&A Ref	Environmental Protection Measures	Objectives of the Recommended Measures and Main Concerns to addressed	Location / Timing	Implementation Agent	Implementation Stages *			Relevant Legislation & Guidelines
						D	C	O	
7.5.20	5.1.20	public filling area) for public fill, whilst EPD should be consulted on landfills for C&D waste. Disposal of C&D waste to landfill must not have more than 30% (by weight) inert material. The C&D waste delivered for landfill disposal should contain no free water and the liquid content should not exceed 70% by weight.  In order to avoid dust or odour impacts, any vehicle leaving a works area carrying C&D waste or public fill should have their load covered.	proper disposal of waste  Waste reuse, proper waste	construction  All work sites / during construction	Construction Contractor		√		ETWB TCW No. 19/2005  Waste Disposal Ordinance
7.5.21	5.1.21	C&D materials should be disposed of at designated public filling facilities or landfills. Disposal of these materials for use at other construction projects is subject to the approval of the Engineer and/or relevant authorities, such as LandsD, PlanD, etc. Furthermore, unauthorized disposal of C&D materials in particular on private agricultural land is prohibited and may be subject to relevant enforcement and regulating actions. The contractor shall refer and strictly follow the trip-ticket system for the disposal of C&D material as stipulated in the ETWB TCW No. 31/2004.	Waste reuse, proper waste	reduction, recycle and disposal of  All work sites / during construction	Construction Contractor		√		ETWB TCW No. 19/2005 Waste Disposal Ordinance  ETWB TCW No. 19/2005, 31/2004
7.5.22	5.1.22	<i>Chemical Waste</i>  Where the construction processes produce chemical waste, the contractor must register with	Waste reuse,	reduction, recycle and  All work sites / during	Construction Contractor		√		Waste Disposal (Chemical Waste) (General)

ES Ref	EM&A Ref	Environmental Protection Measures	Objectives of the Recommended Measures and Main Concerns to addressed	Location / Timing	Implementation Agent	Implementation Stages *			Relevant Legislation & Guidelines
						D	C	O	
		EPD as a chemical waste producer. Wastes classified as chemical wastes are listed in the Waste Disposal (Chemical Waste) (General) Regulation. These wastes are subject to stringent disposal routes. EPD requires information on the particulars of the waste generation processes including the types of waste produced, their location, quantities and generation rates. A nominated contact person must be registered with EPD. An updated list of licensed chemical waste collector can be obtained from EPD.	proper disposal of waste	construction.					Regulation, Code of Practice on the Packaging Labelling and Storage of Chemical Waste
7.5.23	5.1.23	Storage, handling, transport and disposal of chemical waste should be arranged in accordance with the Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes published by EPD, and should be collected by a licensed chemical waste collector.	Waste reduction, reuse, recycle and proper disposal of waste	All work sites / during construction	Construction Contractor		√		Waste Disposal (Chemical Waste) (General) Regulation, Code of Practice on the Packaging Labelling and Storage of Chemical Waste
7.5.24	5.1.24	Suitable containers should be used for specific types of chemical wastes, containers should be properly labelled (English and Chinese in accordance with instructions prescribed in Schedule 2 of the Regulations), resistance to corrosion, stored safely and closely secure. Stored volume should not be kept more than 450 liters unless the specification has been approved by the EPD. Storage area should be enclosed by three sides by a wall, partition of fence that is at least 2	Waste reduction, reuse, recycle and proper disposal of waste	All work sites / during construction	Construction Contractor		√		Waste Disposal (Chemical Waste) (General) Regulation, Code of Practice on the Packaging Labelling and Storage of Chemical Waste

ES Ref	EM&A Ref	Environmental Protection Measures	Objectives of the Recommended Measures and Main Concerns to be addressed	Location / Timing	Implementation Agent	Implementation Stages *			Relevant Legislation & Guidelines
						D	C	O	
7.5.25	5.1.25	<p>m height or height of tallest container with adequate ventilation and space.</p> <p>Hard standing, impermeable surfaces draining via oil interceptors should be provided in works area compounds. Interceptors should be regularly emptied to prevent release of oils and grease into the surface water drainage system after accidental spillages. The interceptor should have a bypass to prevent flushing during periods of heavy rain. Oil and fuel bunkers should be bunded and/or enclosed on three sides to prevent discharge due to accidental spillages or breaches of tanks. Bunding should be of sufficient capacity to accommodate 110% of the volume of the largest container or 20% of the total volume of waste, whichever is largest. Waste collected from any grease traps should be collected and disposed of by a licensed contractor.</p>		Work sites / During construction	Construction Contractor		√		Waste Disposal (Chemical Waste) (General) Regulation, Code of Practice on the Packaging Labelling and Storage of Chemical Waste
7.5.26	5.1.26	<p>Lubricants, waste oils and other chemical wastes are likely to be generated during the maintenance of vehicles and mechanical equipment. Used lubricants should be collected and stored in individual containers which are fully labelled in English and Chinese and stored in a designated secure place. If possible, such waste should be sent to oil recycling companies, and the empty oil drums collected by appropriate companies for reuse or refill.</p>	Waste reduction, reuse, recycle and proper disposal of waste	All work sites / during construction	Construction Contractor		√		Waste Disposal (Chemical Waste) (General) Regulation, Code of Practice on the Packaging Labelling and Storage of Chemical Waste

ES Ref	EM&A Ref	Environmental Protection Measures	Objectives of the Recommended Measures and Main Concerns to addressed	Location / Timing	Implementation Agent	Implementation Stages *			Relevant Legislation & Guidelines
						D	C	O	
7.5.27	5.1.27	The registered chemical waste producer (i.e. the contractor) has to arrange for the chemical waste to be collected by licensed collectors. The licensed collector should regularly take chemical waste to a licensed chemical waste treatment facility (such as the Chemical Waste Treatment Centre in Tsing Yi). A trip ticket system operates to control the movement of chemical wastes.	Waste reuse, recycle and proper disposal of waste	All work sites / during construction	Construction Contractor		√		Waste Disposal (Chemical Waste) (General) Regulation, Code of Practice on the Packaging Labelling and Storage of Chemical Waste
7.5.28	5.1.28	No lubricants, oils, solvents or paint products should be allowed to discharge into water courses, either by direct discharge, or as contaminants carried in surface water runoff from the construction site.	Waste reuse, recycle and proper disposal of waste	All work sites / during construction	Construction Contractor		√		Waste Disposal (Chemical Waste) (General) Regulation, Code of Practice on the Packaging Labelling and Storage of Chemical Waste
7.5.29	5.1.29	<i>Concrete Waste</i> Dry concrete waste (considered as public fill) should be sorted out from the other wastes and recycled for reuse or sorted out for disposal at designated public filling facilities.	Waste reuse, recycle and proper disposal of waste	All work sites / during construction	Construction Contractor		√		Waste Disposal Ordinance ETWB TCW No. 19/2005, 33/2002
7.5.30	5.1.30	<i>Wooden Materials</i> All wooden materials used on-site should be kept separate from other wastes to avoid damage and to facilitate reuse. Timber which cannot be reused	Waste reuse, recycle and proper disposal of waste	All work sites / during construction	Construction Contractor		√		Waste Disposal Ordinance ETWB TCW No.



ES Ref	EM&A Ref	Environmental Protection Measures	Objectives of the Recommended Measures and Main Concerns to addressed	Location / Timing	Implementation Agent	Implementation Stages *			Relevant Legislation & Guidelines
						D	C	O	
7.5.31	5.1.31	should be sorted out from other waste and stored separately from all inert waste before being disposed of to landfill.  Reusable steel or concrete panel shutters, fencing and hoarding and signboard should be used as a preferred alternative to items made of wood, to minimise wastage of wood. Attention should be paid to WBTC No. 19/2001 - Metallic Site Hoardings and Signboards to reduce the amount of timber used on construction sites. Metallic alternatives to timber are readily available and should be used rather than new timber. Precast concrete units should be adopted wherever feasible to minimize the use of timber formwork.	waste  Waste reduction, reuse, recycle and proper disposal of waste	All work sites / during construction	Construction Contractor		√		19/2005, 33/2002  Waste Disposal Ordinance  ETWB TCW No. 19/2005, 33/2002  WBTC No. 19/2001
7.5.32	5.1.32	Only waste material need be taken to a landfill. It should be separated from recyclable wood and steel materials. As for all waste types these materials should be reused on-site or other approved sites before disposal is considered as an option. Disposal to landfill should only be considered as a final option. Contractors are responsible for storage of re-usable materials on-site.	Waste reduction, reuse, recycle and proper disposal of waste	All work sites / during construction	Construction Contractor		√		Waste Disposal Ordinance  ETWB TCW No. 19/2005, 33/2002
7.5.33	5.1.33	<i>Municipal Waste</i>  General refuse generated on-site should be stored in enclosed bins or skips and collected separately from other construction and chemical wastes and disposed of at designated landfill. A temporary	Waste reduction, reuse, recycle and proper disposal of waste	All work sites / during construction	Construction Contractor		√		Waste Disposal Ordinance  ETWB TCW No.

ES Ref	EM&A Ref	Environmental Protection Measures	Objectives of the Recommended Measures and Main Concerns to addressed	Location / Timing	Implementation Agent	Implementation Stages *			Relevant Legislation & Guidelines
						D	C	O	
7.5.34	5.1.34	<p>refuse collection point should be set up by the contractor to facilitate the collection of refuse by licensed contractors. The removal of waste from the site should be arranged on a daily or at least on every second day by the contractor to minimise any potential odour impacts, minimise the presence of pests, vermin and other scavengers and prevent unsightly accumulation of waste.</p> <p>The recyclable component of the municipal waste generated by the workforce, such as aluminium cans, paper and cleansed plastic containers should be separated from other waste. Provision and collection of recycling bins for different types of recyclable waste should be set up by the contractor. The contractor should also be responsible for arranging recycling companies to collect these materials.</p>	<p>waste</p> <p>Waste reduction, reuse, recycle and proper disposal of waste</p>	All work sites / during construction	Construction Contractor		√		<p>19/2005</p> <p>Waste Disposal Ordinance</p> <p>ETWB TCW No. 19/2005</p>
7.5.35	5.1.35	<p>The burning of refuse on-site is prohibited under the Air Pollution Control Ordinance (APCO) (Cap.311).</p>	<p>Waste reduction, reuse, recycle and proper disposal of waste, minimize air quality impacts from burning of refuse on-site</p>	All work sites / during construction	Construction Contractor		√		<p>Waste Disposal Ordinance</p> <p>ETWB TCW No. 19/2005</p> <p>Air Pollution Control Ordinance</p>
7.9.1	5.1.43	<p><i>Land Contamination</i></p> <p>A site at TKL10 to be resumed may have the potential of contaminated land (Figure 7.1). As</p>	<p>To investigate the potential of</p>	TKL10 (as per Figure 7.1) / prior	Construction Contractor's		√		ProPECC PN 3/94

ES Ref	EM&A Ref	Environmental Protection Measures	Objectives of the Recommended Measures and Main Concerns to addressed	Location / Timing	Implementation Agent	Implementation Stages *			Relevant Legislation & Guidelines
						D	C	O	
Figure 7.1	Figure 5.1	detailed site investigation study cannot be undertaken at the design stage, it is recommended that the contractor shall engaged an Environmental Team (ET) to conduct detailed site investigation and if necessary prepare a Contamination Assessment Plan for approval by EPD prior to commencement of construction works.	contaminated land at TKL10	to commencement of construction	Environmental Team				
7.9.2	5.1.44	The ET shall conduct a full site inspection to review the validity of the preliminary CAP and define the exact number of sampling points, sampling locations and sampling parameters for site investigation, taking into account the contractor's site clearance / excavation works in the areas. If necessary, the ET shall then prepare an updated CAP in accordance with EPD's Guidance Notes for Investigation and Remediation of Contaminated Sites for Petrol Filling Stations, Boatyards, and Car Repair/Dismantling Workshops and ProPECC PN 3/94 – Contaminated Land Assessment and Remediation for EPD's endorsement prior to commencement of the site sampling	To investigate the potential of contaminated land at TKL10	TKL10 (as per Figure 7.1) / prior to commencement of construction	Construction Contractor's Environmental Team		√		ProPECC PN 3/94
7.9.3	5.1.45	The ET shall conduct a site contamination assessment and remediation (if necessary) for the identified location in accordance with the endorsed CAP. The ET shall complete the corresponding laboratory tests, prepare and complete the Contamination Assessment Report	To investigate the potential of contaminated land at TKL10	TKL10 (as per Figure 7.1) / prior to commencement of construction	Construction Contractor's Environmental Team		√		ProPECC PN 3/94

ES Ref	EM&A Ref	Environmental Protection Measures	Objectives of the Recommended Measures and Main Concerns to address	Location / Timing	Implementation Agent	Implementation Stages *			Relevant Legislation & Guidelines
						D	C	O	
7.6.24	5.1.46	<p>(CAR) and Remediation Action Plan (RAP), where necessary and submit to EPD for approval prior to the commencement of any construction works in order to avoid or minimise any associated risks or hazards</p> <p>Should contaminated materials be identified, the contractor shall carry out the following environmental health and safety precautionary measures, or any other measures as instructed by the Engineer:</p> <p>(1) Site workers should wear appropriate personal protective equipment (gloves, dust mask) when exposed to contaminated materials.</p> <p>(2) The stockpile of contaminated materials, if permitted by the Engineers, should be segregated from the uncontaminated ones. In addition, the contaminated materials (whether stockpiled or being transported) should be properly covered during wet seasons to avoid leaching out of contaminants.</p> <p>(3) Eating, drinking and smoking should not be allowed in contaminated areas to avoid inadvertent ingestion of contaminants. Adequate washing facilities should be provided.</p>	To ensure health and safety to the workers in the event contaminated soil is found at TKL10	TKL10 (as per Figure 7.1) / during construction	Construction Contractor's Environmental Team		√		ProPECC PN 3/94

ES Ref	EM&A Ref	Environmental Protection Measures	Objectives of the Recommended Measures and Main Concerns to addressed	Location / Timing	Implementation Agent	Implementation Stages *			Relevant Legislation & Guidelines
						D	C	O	
		(4) Bulk earth moving equipment should be utilised as much as possible to minimize workers' handling and contact of the contaminated materials.  (5) The stockpiling area should be separated from the nearby water drainage network.							

D = Design, C = Construction, O = Operation

**Implementation Schedule of Sediment Quality Investigation**

ES Ref	EM&A Ref	Environmental Protection Measures	Objectives of the Recommended Measures and Main Concerns to addressed	Location / Time	Implementation Agent	Implementation Stages			Relevant Legislation & Guidelines
						D	C	O	
6.7.1	5.1.38	Excavated sediment from existing stream should be reused on-site as backfilling material.	To minimize offsite disposal of sediment	For channels where sediment removal is required / during construction	Construction Contractor		√		
6.7.2	5.1.39	To minimize the potential impacts on water quality, sediment must be excavated with care	To minimize offsite disposal of sediment	For channels where sediment removal is required / during construction	Construction Contractor		√		
6.7.3	5.1.40	The use of containment structures (e.g, bunds) and diversion channels is recommended wherever practicable to facilitate a dry or at least confined excavation within water courses. By limiting or confining the works areas, the extent of disturbance to the surrounding water bodies will be significantly reduced, and thus the resulting impacts on water quality from sediment re-suspension will also be reduced. Furthermore, excavation works should be carried out during periods of low flow (during dry season) as far as practicable to minimize impacts on downstream water quality and sensitive receivers	To minimize offsite disposal of sediment	For channels where sediment removal is required / during construction	Construction Contractor		√		
6.7.4	5.1.41	The impact arising from water being pumped from streams into adjacent streams, channels or temporary ponds should be mitigated to avoid pollutants. The water should be pumped to temporary sedimentation or other silt removal facilities to allow settlement of suspended solids before any water is discharged into local water courses. If large volumes of water need to be removed from the works area, temporary dams should be constructed using sandbags to prevent mixing of polluted and turbid water with cleaner water blow the dam.	To minimize offsite disposal of sediment	For channels where sediment removal is required / during construction	Construction Contractor		√		
6.7.5	5.1.42	After dewatering of the streams, the sediments should be allowed to dry before excavation. This will facilitate excavation of the sediment and also minimize the risk of drained water following back into water courses as the sediment is handled. Where time or weather constraints require handling of wet sediment, care should be taken in the removal of the sediment and the storage area should be banded to prevent silty runoff entering water courses.	To minimize offsite disposal of sediment	For channels where sediment removal is required / during construction	Construction Contractor		√		

D = Design, C = Construction, O = Operation

**Implementation Schedule of Noise Mitigation Measures**

ES Ref	EM&A Ref	Environmental Protection Measures	Objectives of the Recommended Measures and Main Concerns to addressed	Location / Time	Implementation Agent	Implementation Stages			Relevant Legislation & Guidelines
						D	C	O	
2.6.2 – 2.6.5	Table 3.4	<p><i>Level 1 Mitigation – Use of Quiet Plant</i></p> <p>The use of quiet plant is considered to be the most effective ways of alleviating Construction noise impact. The Contractor should use quiet plant with sound power level lower than that stipulated in the TM-GW as the Level 1 mitigation for construction noise. The quiet plant used in the construction noise calculation is shown in Appendix B. The Contractor can propose other suitable alternative equipment with similar or lower sound power level.</p> <p>The use of mini or lower power rating equipment (e.g. mini excavator) should also be considered where practical. This technique would be feasible and practical at some locations given the limited space available for using large size construction equipment and the small scale works involved.</p> <p>The Contractor should take note of ETWB TCW No. 19/2005 – Environmental Management on Construction Sites which sets out the policy and procedure requiring contractors to among others, adopt Quality Power Mechanical Equipment (QPME)</p>	To Protect NSRs from noise during construction	All works site / during construction	Construction Contractor		√		ProPECC PN 2/93
2.6.7 – 2.6.8 (Figures 2.9 – 2.15)	Table 3.4	<p><i>Level 2 Mitigation – Use of Temporary Noise Barriers</i></p> <p>Since most of the NSRs within the Project area, are typically low-rise village houses of not more than 3 storeys tall, it would be effective to have noise screening structures or temporary noise barriers purposely-built along the site boundary to provide additional protection to NSRs close to the construction site boundary. This could be in the form of purposely-built site hoarding constructed from appropriate materials with a minimum superficial density of 7kg/m<sup>3</sup>. Noise barrier should be provide for noisy construction activities that would be undertaken close (about 25m or less) to NSRs. The noise barriers should have a vertical height of at least 2.5m or (depending on the height of the NSRs to be protected) a height ensuring that the operating equipment can be shielded from the view of the NSRs. It should have no gaps or opening at joints. The Contractor should regularly inspect and maintain the noise barrier to ensure its effectiveness.</p> <p>For the construction works which have the potential to exceed the noise standards on nearby NSR and shoes line of sight cannot be effectively blocked by the temporary noise barrier, movable (mobile) barriers should be provided. Movable barriers of at least 2.5m height with a small cantilevered upper portion and skid footing can be located within a few meters of stationary plant (e.g. generator, compressor) and within about 5m or more of a mobile equipment (e.g. excavator, mobile crane), such that the line of sight to the NSR is blocked by the barriers.</p>	To Protect NSRs from noise during construction	Locations as per Figures 2.9 – 2.15 of ES or all works site located at 25m or less from NSRs / during construction	Construction Contractor		√		ProPECC PN 2/93

ES Ref	EM&A Ref	Environmental Protection Measures	Objectives of the Recommended Measures and Main Concerns to addressed	Location / Time	Implementation Agent	Implementation Stages			Relevant Legislation & Guidelines
						D	C	O	
2.9.1	3.8.1	The location of the temporary noise barriers should be further reviewed during the detailed design stage by the detailed design engineer or by the Environmental Team (ET) Leader during construction stage based on the latest construction programme and contemporary site conditions, including any changes with respect to NSRs.	To ensure the proposed temporary noise barriers are effectively implemented	Locations as per Figures 2.9 – 2.15 of ES or all works site located at 25m or less from NSRs / during construction	Detailed Design Engineer / Construction Contractor	√	√		ProPECC PN 2/93
2.6.2 – 2.6.5	Table 3.4	<p><i>Good Site Practices</i></p> <p>In general, potential construction noise impact can be minimized or avoided by imposing a combination of the following good site practices as mitigation measures:</p> <p>(a) Only well-maintained plant should be operated on-site and plant should be serviced regularly during the construction period.</p> <p>(b) Construction plant should be sited away from NSRs.</p> <p>(c) Machines and plant that may be in intermittent use should be shut down between works periods or should be throttled down to a minimum.</p> <p>(d) Equipment known to emit sound strongly in one direction should be orientated such that the noise is directed away from nearby NSRs.</p> <p>(e) Material stockpiles and other structures (such as site offices) should be effectively utilized to shield on-site construction activities.</p> <p>(f) Stationary equipment should be located within the channel when weather conditions permit (e.g. dry season).</p> <p>(g) The Contractor shall devise, arrange methods of working and carrying out the works in such manner as to minimize noise impacts on the surrounding environment and shall provide experienced personnel with suitable training to ensure that these measures are implemented properly.</p> <p>(h) In the event that new schools are built near the works area, the contractor should minimize construction noise exposure to the school (especially during examination periods). The Contractor should liaise with the school and the Examination Authority to ascertain the exact dates and times of all examination periods during the course of the contract and to avoid noisy activities during these periods.</p>	To Protect NSRs from noise during construction	All works site / during construction	Construction Contractor		√		ProPECC PN 2/93
2.6.14	Table 3.4	<p><i>Public Relation Strategy</i></p> <p>To maintain an effective communication channel with the public, a 24-hour hotline system should be established by the project office for the Contractor to receive any enquiry and complaint lodged by the public in the respect of the Project.</p>	To promote good public relation and maintain effective communication	All works site / during construction	Project Office (Engineer) & Construction		√		-----



ES Ref	EM&A Ref	Environmental Protection Measures	Objectives of the Recommended Measures and Main Concerns to addressed	Location / Time	Implementation Agent	Implementation Stages			Relevant Legislation & Guidelines
						D	C	O	
		Upon receipt of enquiry / complaint, the Contractor (or its ET) should investigate the causes of the incident and take the appropriate action to rectify the situation. Periodic newsletters, information leaflets, notices or other means of communication should be provided to the affected villages, communities, and residents advising them the current progress, the schedule of works in future, the potential environmental impacts arising from the works and the corresponding mitigation measures.	during construction		Contractor				
2.9.1	3.8.1	The Contractor should design, construct, operate and maintain the mitigation measures throughout the construction stage and as required by the Engineer. Before commencement of the works, the Contractor should submit to the Engineer for approval (as part of their method statement) details of the mitigation measures to be employed under the works. The Contractor's proposed mitigation measures should also be certified by the Environmental Team (ET) Leader and verified by the Independent Environmental Checker (IEC) to ensure the intended noise reduction effectiveness can be achieved.	To ensure proper implementation of noise mitigation measures by the Contractor	All works site / during construction	Construction Contractor		√		ProPECC PN 2/93

D = Design, C = Construction, O = Operation

**Implementation Schedule of Landscape and Visual Impact Measures**

ES Ref	EM&A Ref	Environmental Protection Measures	Objectives of the Recommended Measures and Main Concerns to addressed	Location / Time	Implementation Agent	Implementation Stages			Relevant Legislation & Guidelines
						D	C	O	
5.2.51 – 5.2.52	7.5.10 – 7.5.11	<p>Landscape Mitigation -TKL02</p> <p>To minimize cutting of native tree species at the proposed channel's beginning, the alignment should be adjusted to reduce tree felling. Where unavoidable, re-vegetation efforts should concentrate on using native species. One of the area's landscape features are the mature bamboo growth clusters. They have been retained in the latest design.</p> <p>The current drainage design includes gabion walls with a tiled angle of 10 degree. This would allow vegetation to establish better when combined with the application of a growth medium, providing more micro-habitat space.</p>	To minimize landscape and visual impact form the Project	TKL02 / during detailed design and construction	Detailed Design Engineer & Construction Contractor	√	√		ETWB TCW No. 3/2006
5.2.58 – 5.2.60	7.5.12 – 7.5.14	<p>Landscape Mitigation - TKL07</p> <p>To minimize cutting of native tree species at the proposed channel's centre section. Where unavoidable, re-vegetation efforts should concentrate on using native species.</p> <p>To compensate for the loss of riparian habitat due to the river training works and to create breeding and foraging habitats for wetland dependent wildlife, the retained meanders may be developed into marshes.</p> <p>The current drainage design includes gabion walls with a tiled angle of 10 degree. This would allow vegetation to establish better when combined with the application of a growth medium, providing more micro-habitat space.</p>	To minimize landscape and visual impact form the Project	TKL07 / during detailed design and construction	Detailed Design Engineer & Construction Contractor	√	√		ETWB TCW No. 3/2006
5.2.76 – 5.2.79	7.5.16 – 7.5.19	<p>Landscape Mitigation - MUP01 &amp; MUP02</p> <p>The design modifies to the existing streamcourse only in those areas where there is a particular risk of flooding. Some localized bank stabilization will use materials permitting decolonization by riparian vegetation such as gabion baskets.</p> <p>The proposed treatment would be beneficial, especially in the less disturbed up-stream areas providing roosting and foraging grounds for at least 36 wetland dependent species, the highest number of all studied sites.</p> <p>Natural stream bottom should be retained in situ and works involving disturbance to the stream bottom should be restricted to short sections proceeding upstream to permit survival and subsequent decolonization of worked areas by stream fauna.</p> <p>To minimize cutting of native tree species at southern section of MUP01 and MUP02, the alignment should be adjusted as much as possible so to reduce the need for tree felling (this section represents approximately 200m to 280m downstream from the proposed channel start). If removal of trees remains unavoidable, re-vegetation efforts after work completion should focus on the use of native species as found in the affected areas.</p>	To minimize landscape and visual impact form the Project	MUP01 and MUP02 / during detailed design and construction	Detailed Design Engineer & Construction Contractor	√	√		ETWB TCW No. 3/2006

ES Ref	EM&A Ref	Environmental Protection Measures	Objectives of the Recommended Measures and Main Concerns to addressed	Location / Time	Implementation Agent	Implementation Stages			Relevant Legislation & Guidelines
						D	C	O	
5.3.41 – 5.3.42	7.5.26 – 7.5.27	Visual Mitigation – TKL02  To minimize cutting of native tree species at the proposed channel's beginning, the alignment should be adjusted to reduce tree felling and maintain this visual amenity.  The current drainage design includes gabion walls with a tilted angle of 10 degree. This would allow vegetation to establish better when combined with the application of a growth medium, providing more micro-habitat space, reducing visual impacts furthermore.	To minimize landscape and visual impact form the Project	TKL02 / during detailed design and construction	Detailed Design Engineer & Construction Contractor	√	√		ETWB TCW No. 3/2006
5.3.46 – 5.3.47	7.5.28 – 7.5.29	Visual Mitigation – TKL07  As much as possible, riverside tree cover should be retained. The current drainage design includes vertical gabion walls. The current drainage design includes gabion walls with a tilted angle of 10 degree. This would be allow vegetation to establish better when combined with the application of a growth medium, providing more micro-habitat space.	To minimize landscape and visual impact form the Project	TKL07 / during detailed design and construction	Detailed Design Engineer & Construction Contractor	√	√		ETWB TCW No. 3/2006
5.3.60	7.5.31	Visual Mitigation – MUP01 and MUP02  To minimize cutting of the Fung Shui woodland at the southern section of MUP01, the alignment should be adjusted. If removal of trees remains unavoidable, re-vegetation efforts after work completion should focus on the use of native species as found in the affected areas.	To minimize landscape and visual impact form the Project	MUP01 and MUP02 / during detailed design and construction	Detailed Design Engineer & Construction Contractor	√	√		ETWB TCW No. 3/2006

D = Design, C = Construction, O = Operation

**Implementation Schedule of Ecological Impact Measures**

ES Ref	EM&A Ref	Environmental Protection Measures	Objectives of the Recommended Measures and Main Concerns to addressed	Location / Time	Implementation Agent	Implementation Stages			Relevant Legislation & Guidelines
						D	C	O	
		MUP01/02							
3.16.15	6.5.15	<i>Existing stream course</i> The proposed works within the stream channel should be carried out within the dry season (1 <sup>st</sup> October – 31 <sup>st</sup> March)	Minimize ecological impact on MUP01/02 during construction	All works sites at MUP01/02 during construction	Construction Contractor		√		DSD Technical Circular No. 2/2004
3.16.16	6.5.16	Appropriate site management procedures during the construction phase should be adopted, as recommended in ETWB TCW No. 5/2005, to minimize potential disturbance impacts and pollution risks (water quality impacts) to the stream. This should include the location of access to the site and storage of materials, and treatment of construction site waste to prevent pollution of the stream. These site management measures are listed in the subsequent section.	Minimize ecological impact on MUP01/02 during construction	All works sites at MUP01/02 during construction			√		ETWB TCW No. 5/2005
3.16.17	6.5.17	In addition, the widened stream bottom should be floored with natural materials (natural rock and fines of varying sizes) to approximate as closely as possible to the rocky components of a natural stream bottom. Natural materials of a smaller particle size (sand and silt grains) will soon be deposited naturally.	Minimize ecological impact on MUP01/02 during construction	All works sites at MUP01/02 during construction	Construction Contractor		√		DSD Technical Circular No. 2/2004
3.16.18	6.5.18	<i>Stream banks and riparian vegetation</i> The nature of the woks limits the extent to which minimization of adverse impacts during the construction stage is feasible. However, where possible native riparian trees which would be impacted during construction works should be transplanted to suitable locations within the project area. Impacts to mature native trees close to the stream should be avoided by retaining the trees in-situ wherever possible, especially in those areas of riparian woodland along MUP02 which are to be retained (e.g. along the bypassed meander).	Minimize ecological impact on MUP01/02 during construction in riparian trees	All works sites at TKL02 and TKL07 during construction	Construction Contractor		√		DSD Technical Circular No. 2/2004
		TKL02 & 07							
3.16.20	6.5.20	<i>Existing stream course</i> Appropriate site management procedures during the construction phase should be adopted, as recommended in ETWB TCW No. 5/2005, to minimize potential disturbance impacts and pollution risks (water quality impacts) to the stream. This should include the location of access to the site and storage of materials, and treatment of construction site waste to prevent pollution of the stream. These site management measures are listed in the subsequent section.	Minimize ecological impact on TKL02 and TKL07 during construction	All works sites at TKL02 and TKL07 during construction	Construction Contractor		√		ETWB TCW No. 5/2005
3.16.21	6.5.21	Potential ecological value of the channelised stream beds will be considerably influenced by the extent to which the grasscrete area has the potential to be colonized by a range of facultative or obligate wetland plant species. Accordingly the grasscrete paving should be not more than 33% concrete (i.e. not	Minimize ecological impact on MUP01/02 during construction	All works sites at TKL02 and TKL07 during construction	Construction Contractor		√		DSD Technical Circular No. 2/2004

ES Ref	EM&A Ref	Environmental Protection Measures	Objectives of the Recommended Measures and Main Concerns to addressed	Location / Time	Implementation Agent	Implementation Stages			Relevant Legislation & Guidelines
						D	C	O	
		less than 67% "hole")							
3.16.22	6.5.22	<p><i>Stream banks and riparian vegetation</i></p> <p>The nature of the woks limits the extent to which minimization of adverse impacts during the construction stage is feasible. However, where possible native riparian trees which would be impacted during construction works should be transplanted to suitable locations within the project area. Impacts to mature native trees close to the stream should be avoided by retaining the trees in-situ wherever possible,</p>	Minimize ecological impact on MUP01/02 during construction in particular riparian trees	All works sites at TKL02 and TKL07 during construction	Construction Contractor		√		DSD Technical Circular No. 2/2004
3.6.23	6.5.23	<p><i>Proposed Site Management Measures during Construction</i></p> <p>The recommended site management measures are generally good site practices and proper water quality control / waste management measures to be implemented by the contractor for all works near stream courses. These measures include:</p> <ul style="list-style-type: none"> <li>• Construction activities should be restricted to works area that should be clearly demarcated.</li> <li>• Excavation works should be carried out during the dry season where stream flow is low. Where adequate spare is available, works should be carefully phased such that only on side of the channel is constructed and not all of the stream is impacted at any time, to provide refuge for aquatic organisms. Temporary diversion should be provided to ensure continuous water flow to the downstream section.</li> <li>• The proposed works site inside or in the proximity of natural streams should be temporarily isolated by containment structures, such as using bounds or sandbag barriers (wrapped with getextile fabric) or other similar techniques, to facilitate a dry or at least confined excavation within the water courses and to prevent adverse impacts on the stream water quality.</li> <li>• For the stream section where the existing natural stream bed and bank will be left untouched, no disturbance to the stream bed and bank should be allowed from construction works, equipment or workers. If temporary access track on streambed is unavoidable, this should be carefully planned and located to minimize disturbance to the substrate of stream and riparian vegetation by construction equipment. Temporary access track should be kept to the minimum width and length. Temporary stream crossings should be supported on stilts above the stream bed.</li> <li>• Adequate temporary drainage measures including sediment and oil/grease traps should be provided to prevent contaminated site run-off entering the water bodies.</li> </ul>	Minimize ecological impact on the proposed streams during construction	All works sites / during construction	Construction Contractor		√		DSD Technical Circular No. 2/2004 ETWB TCW No. 5/2005

ES Ref	EM&A Ref	Environmental Protection Measures	Objectives of the Recommended Measures and Main Concerns to addressed	Location / Time	Implementation Agent	Implementation Stages			Relevant Legislation & Guidelines
						D	C	O	
		<ul style="list-style-type: none"> <li>Stockpiling of construction materials, spoils and waste should be properly covered and located away from water bodies to prevent silty runoff and other pollutants from entering the water bodies during rain storms.</li> <li>Construction effluent, site run-off and sewage should be properly collected, treated and disposed.</li> <li>Supervisory staff of the contractor should be assigned to station on site to closely supervise and monitor the construction works. All workers should be regularly briefed to avoid disturbing the flora and fauna near the works area.</li> </ul>							
3.16.24	6.5.24	The contractor should provide details of the mitigation measures to be implemented during construction stage as part of their working method statement to the Engineer for approval. This should be reviewed by the Environmental Team Leader.							
3.16.27 Tables 3.78 & 3.79 Figures 3.42 – 3.48	6.5.27 Tables 6.5 & 6.6	<p><i>Proposed Measures to Mitigate for Adverse Ecological Impacts</i></p> <p>Mitigation planting of native trees, shrubs and bamboos should be undertaken in locations where the project area includes sufficient space adjacent to the stream but outside the channel itself. Appropriate locations for tree and bamboo planting are detail on Figures 3.42 – 3.48 (of ES Report). Table 3.78 details appropriate species of trees and bamboos for streamside planting, whilst Table 3.79 details appropriate species for woodland planting</p> <p>Tree and bamboo species for riparian planting at TKL02 and TKL07:</p> <ul style="list-style-type: none"> <li><i>Celtis tetranda (sinensis)</i></li> <li><i>Ficus hispida</i></li> <li><i>Ficus virens (superba)</i></li> <li><i>Sapium sebiferum</i></li> <li><i>Schefflera octophylla</i></li> <li><i>Bambusa eutuldoides</i></li> </ul>	To mitigate for the loss of shaded stream sections due to loss of bank side trees at TKL02 and TKL07	Mitigation planting at TKL02 and TKL07 in locations as shown in Figures 3.42 – 3.48 (of ES Report) / during construction	Construction Contractor		√		
3.16.28	6.5.28	Detailed planting plans showing location, species and numbers of trees (together with any trees to be transplanted) as part of the Landscape Plan should be prepared and adopted prior to commencement of the project.	To mitigate for the loss of shaded stream sections due to loss of bank side trees at TKL02 and TKL07	Mitigation planting at TKL02 and TKL07 in locations as shown in Figures 3.42 – 3.48 (of ES Report) / during construction	Construction Contractor		√		

Implementation Schedule of Air Quality Impact Assessment

ES Ref	EM&A Ref	Environmental Protection Measures	Objectives of the Recommended Measures and Main Concerns to addressed	Location / Timing	Implementation Agent	Implementation Stages *			Relevant Legislation & Guidelines
						D	C	O	
<b>Air Quality - Construction Phase</b>									
**	2.9.2	<p><i>General</i></p> <p>General requirements for air pollution control as stated in the EPD's recommended Pollution Control Clauses for Construction Contracts are listed below:</p> <p>(i) The Contractor shall observed and comply with the Air Pollution Control Ordinance and its subsidiary regulations, particularly the Air Pollution Control (Open Burning) Regulation and Air Pollution Control (Construction Dust) Regulation and Air Pollution Control (Smoke) Regulation.</p> <p>(ii) The Contractor shall undertake at all times to prevent dust nuisance and smoke as a result of his activities.</p> <p>(iii) The Contractor shall ensure that there will be adequate water supply / storage for dust suppression.</p> <p>(iv) The Contractor shall devise, arrange methods of working and carrying out the works in such a manner so as to minimise dust impacts on the surrounding environment, and shall provide experienced personnel with suitable training to ensure that these methods are</p>	To prevent air quality impacts on sensitive receivers during construction	All works site / during construction	Construction Contractor		√		<p>Air Pollution Control Ordinance</p> <p>Air Pollution Control (Open Burning) Regulation</p> <p>Air Pollution Control (Construction Dust) Regulation</p> <p>Air Pollution Control (Smoke) Regulation</p>

ES Ref	EM&A Ref	Environmental Protection Measures	Objectives of the Recommended Measures and Main Concerns to addressed	Location / Timing	Implementation Agent	Implementation Stages *			Relevant Legislation & Guidelines
						D	C	O	
**	2.9.3	<p>implemented.</p> <p>(v) Before the commencement of any work, the Engineer may require the methods of working, plant, equipment and air pollution control system to be used on the site to be made available for inspection and approval to ensure that they are suitable for the project.</p> <p><i>Dust</i></p> <p>The following good construction practices are recommended to be adopted on-site to minimize potential air quality impacts from dust emissions:</p> <p>(i) Use of regular watering (at least twice daily) to reduce dust emissions from exposed site surfaces, particularly during dry weather.</p> <p>(ii) Side enclosure and covering of any aggregate or dusty material stockpiles to reduce emissions. Where this is not practicable owing to frequent usage, watering shall be employed to aggregate fines.</p> <p>(iii) Tarpaulin covering of all dusty vehicle loads transported to and from site locations.</p>	To prevent dust nuisance on sensitive receivers during construction	All works site / during construction	Construction Contractor		√		<p>Air Pollution Control Ordinance</p> <p>Air Pollution Control (Construction Dust) Regulation</p>
**	2.9.4	<p><i>Odour</i></p> <p>The following site practices are recommended to minimize potential air quality impacts from odour nuisance:</p> <p>(i) Any odorous excavated material shall be</p>	To prevent odour nuisance on sensitive receivers during construction	All works site / during construction	Construction Contractor		√		




ES Ref	EM&A Ref	Environmental Protection Measures	Objectives of the Recommended Measures and Main Concerns to addressed	Location / Timing	Implementation Agent	Implementation Stages *			Relevant Legislation & Guidelines
						D	C	O	
		placed as far away from receivers as possible. (ii) Any stockpiles of odorous excavated material shall be covered with tarpaulin sheets. (iii) Any odorous stockpiled material shall be removed from site as soon as possible (within 3 days) to reduce the amount of time available for decomposition of organic matter.							

D = Design, C = Construction, O = Operation


## **Appendix D**

### **Environmental Monitoring Locations**


# MONITORING LOCATION DESIGNATED PROJECT

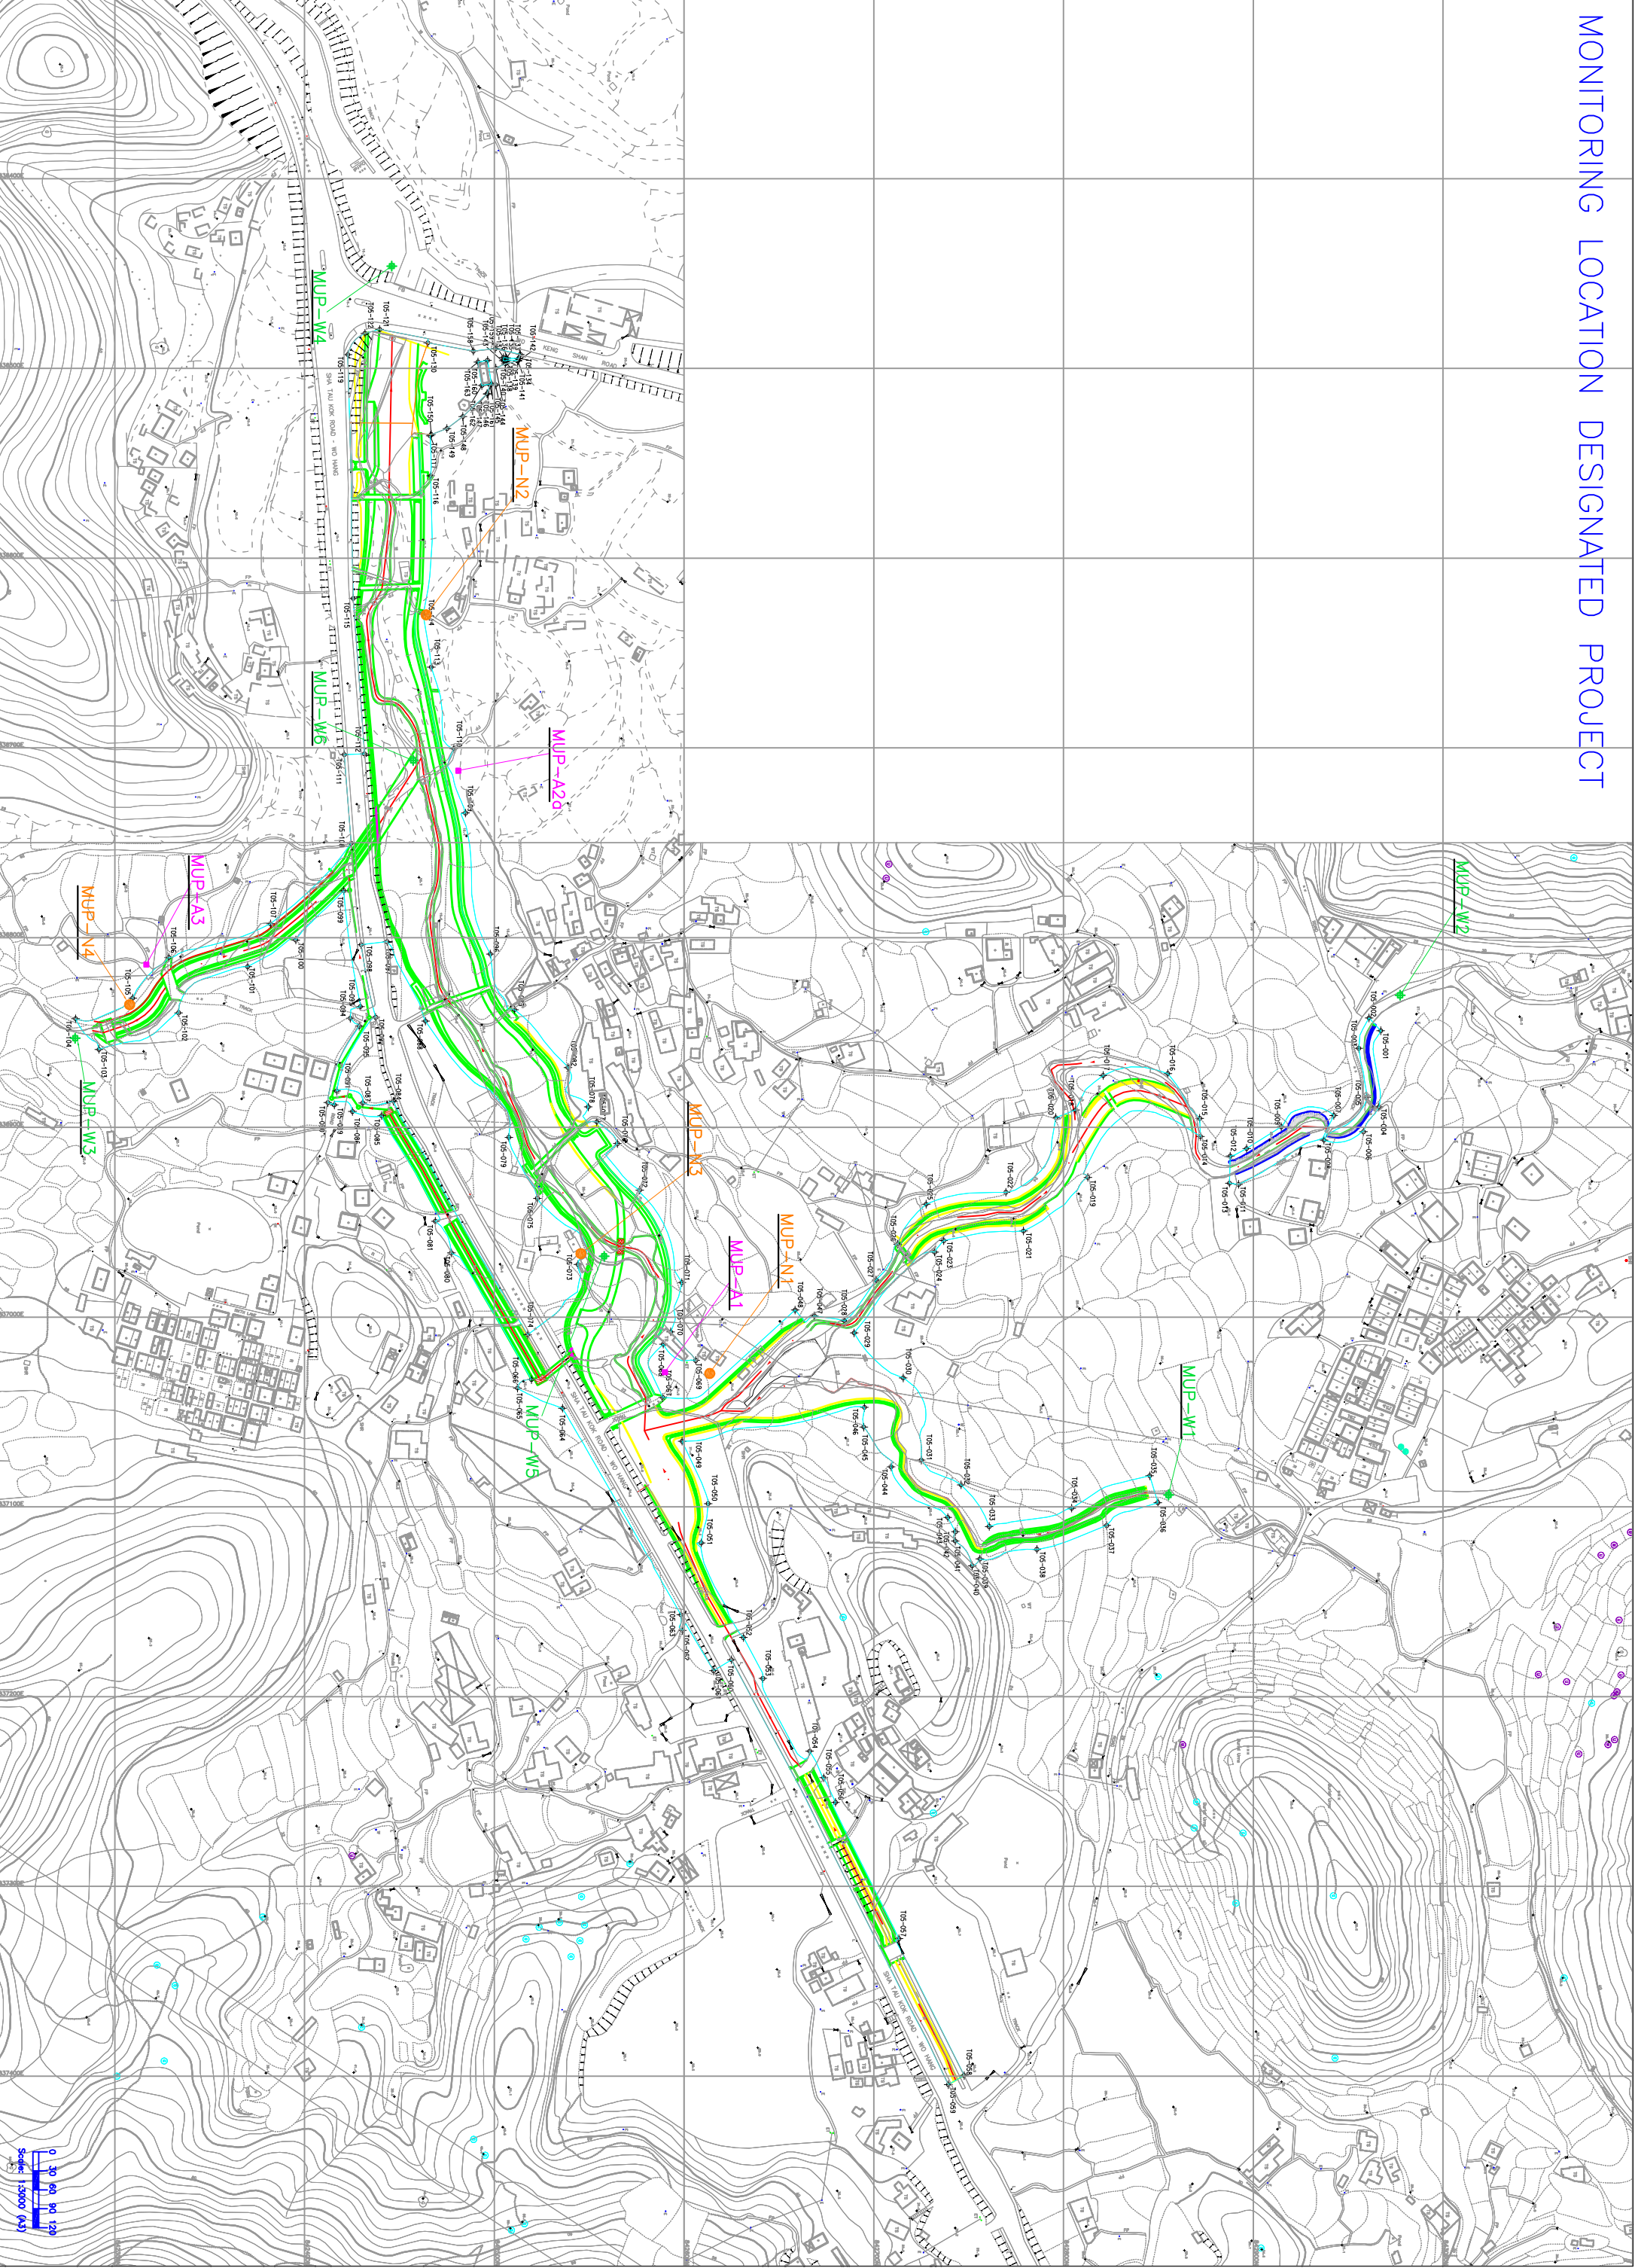

# MONITORING LOCATION DESIGNATED PROJECT

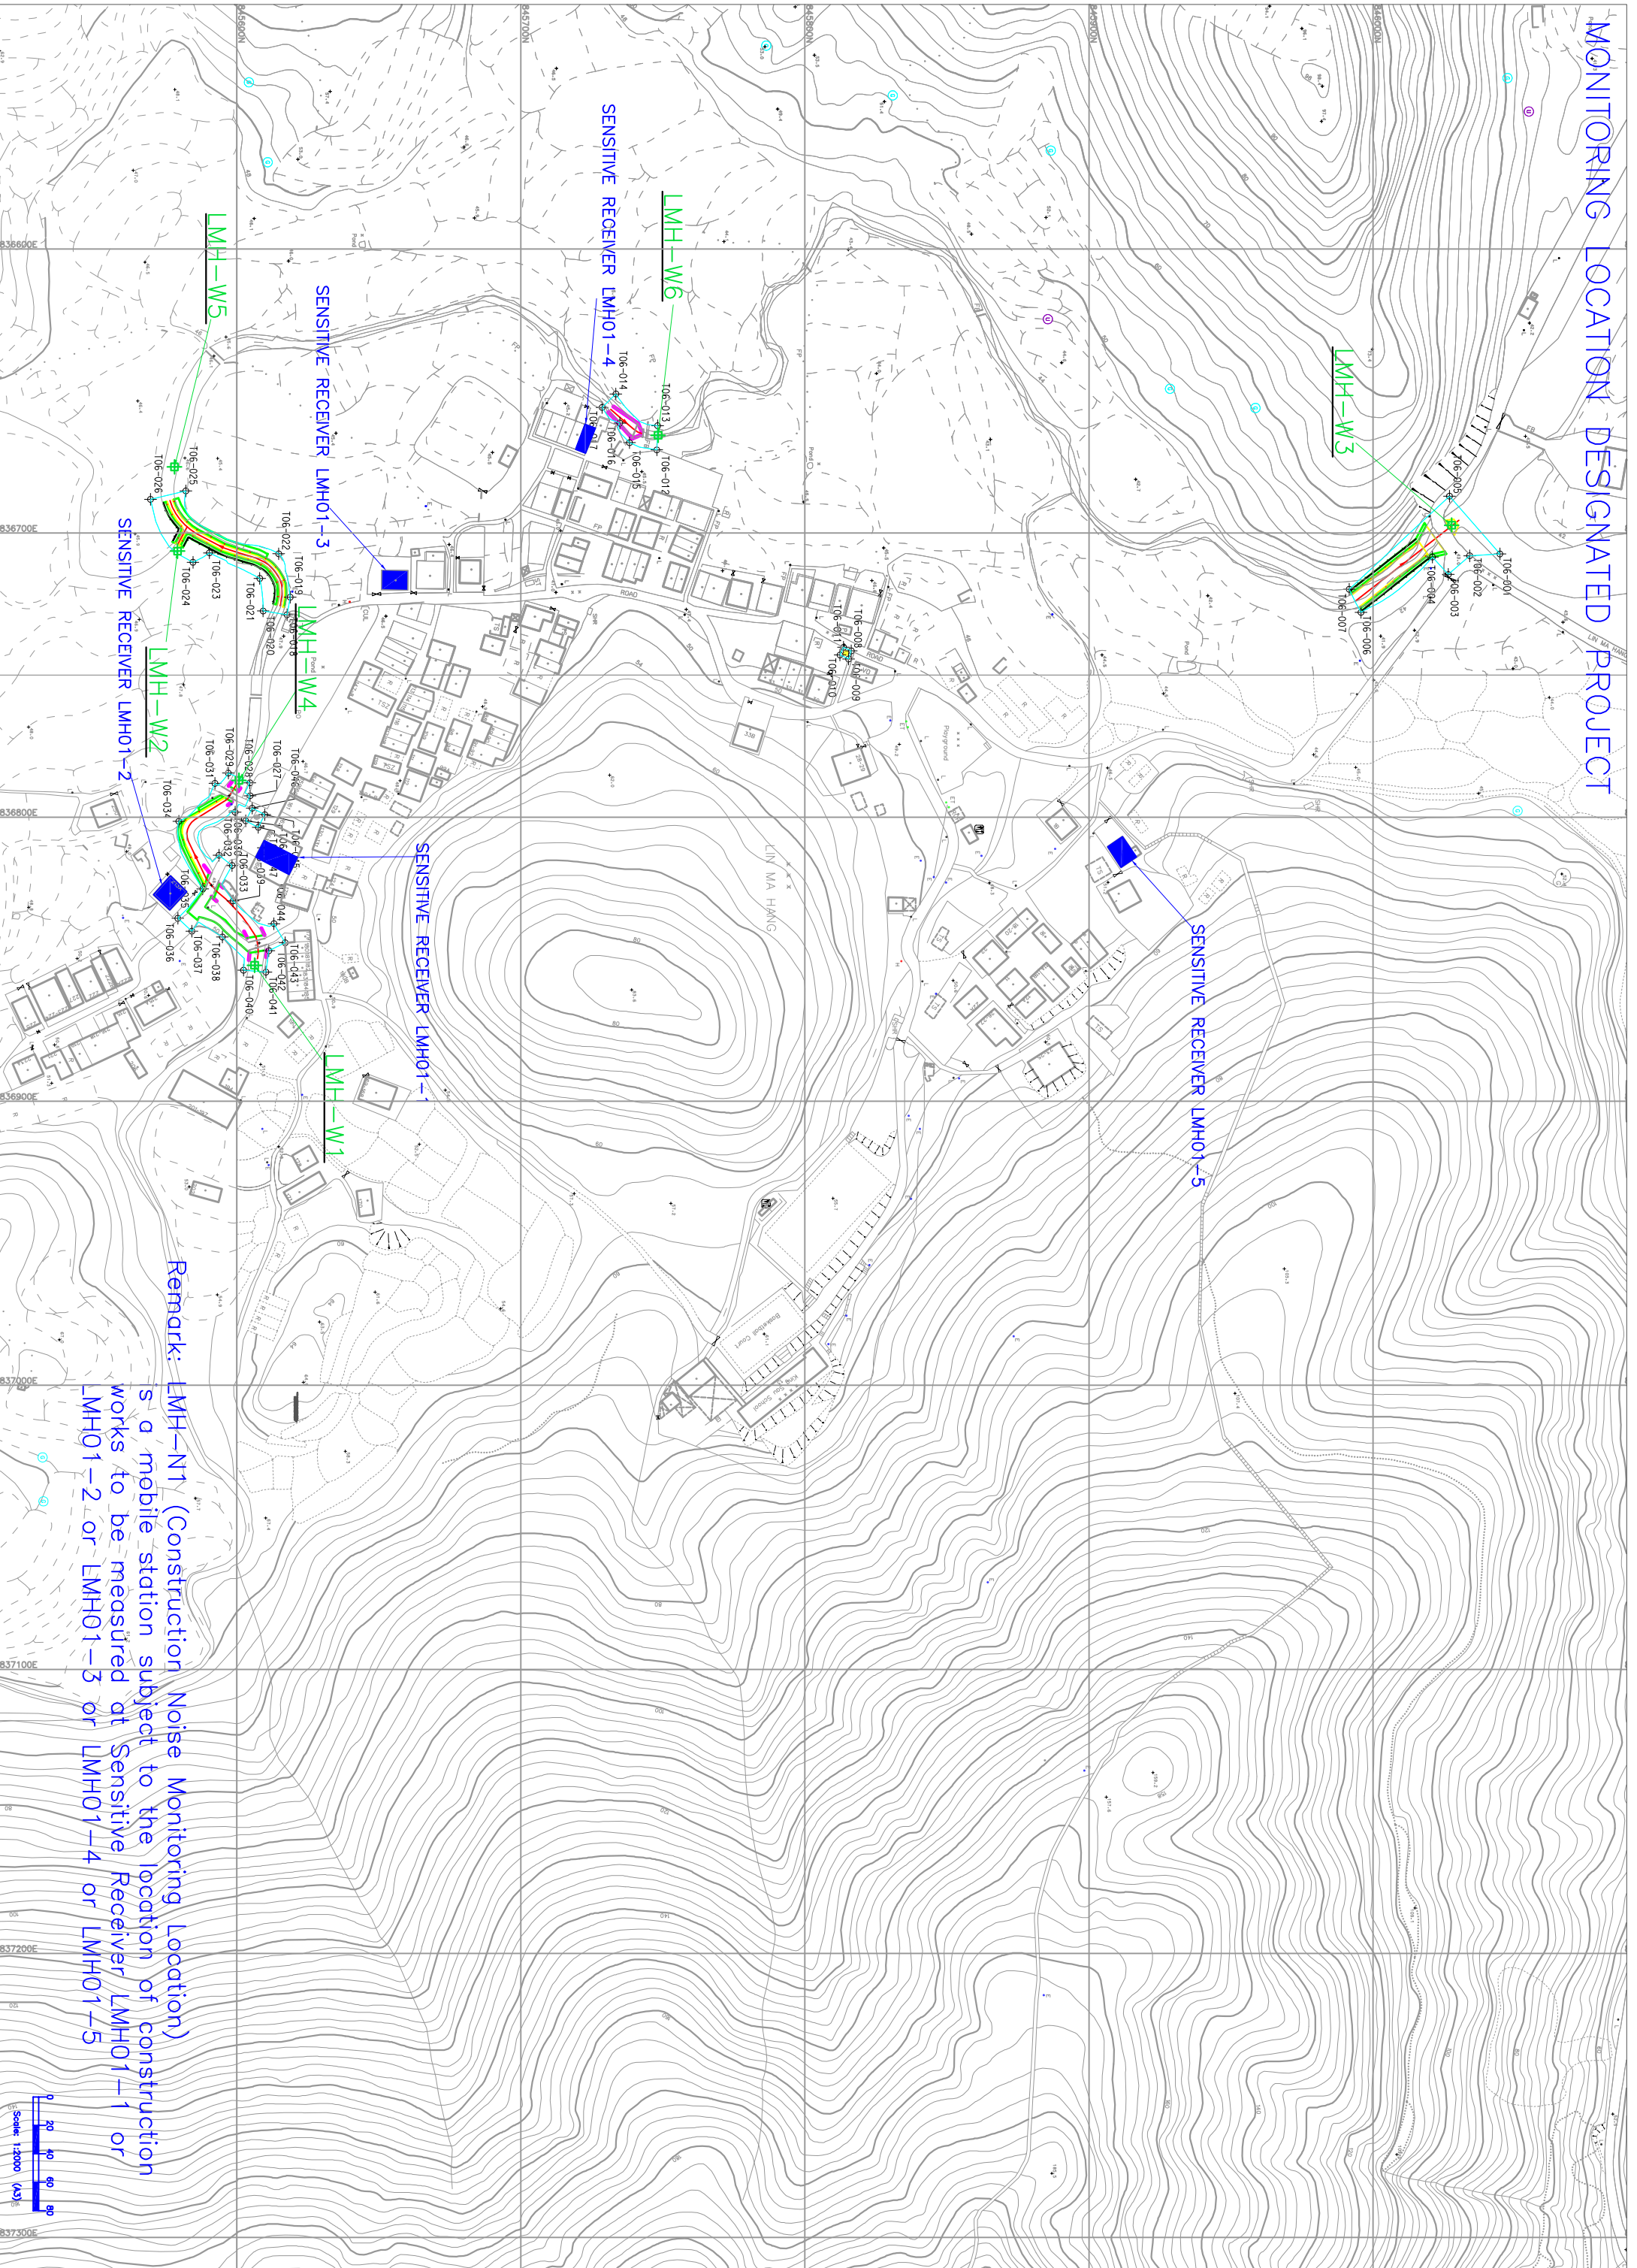

Remark: LMH-N1 (Construction Noise Monitoring Location) is a mobile station subject to the location of construction works to be measured at Sensitive Receiver LMH01-1 or LMH01-2 or LMH01-3 or LMH01-4 or LMH01-5



**Appendix E**  
**Certificates of Calibration**

**Equipment Calibration List**

<b>Items</b>	<b>Aspect</b>	<b>Description of Equipment</b>	<b>Date of Calibration</b>	<b>Date of Next Calibration</b>
1	Air	TSP Sampler Calibration Spreadsheet for MUP-A1	10 Jun 09	10 Sep 09
2		TSP Sampler Calibration Spreadsheet for MUP-A2	10 Jun 09	10 Sep 09
3		TSP Sampler Calibration Spreadsheet for MUP-A3	10 Jun 09	10 Sep 09
4		TSI DustTrak Model 8520 (Serial No. 21060)	30 Aug 08	30 Aug 09
5		TSI DustTrak Model 8520 (Serial No. 23080)	30 Aug 08	30 Aug 09
6		TSI DustTrak Model 8520 (Serial No. 23079)	30 Aug 08	30 Aug 09
7	Noise	Bruel & Kjaer Integrating Sound Level Meter (Serial No. 2285762)	30 Apr 09	30 Apr 10
8		Bruel & Kjaer Integrating Sound Level Meter (Serial No. 2285690)	30 Apr 09	30 Apr 10
9		Bruel & Kjaer Acoustical Calibrator (Serial No. 2292168)	28 Apr 09	28 Apr 10
10		Bruel & Kjaer Acoustical Calibrator (Serial No. 2326408)	28 Apr 09	28 Apr 10
11	Water	YSI 550A (Serial No. 05F2063AZ)	21 Apr 09 17 July 09	21 July 09 17 Oct 09
12		Hanna pH Meter HI98107 (Serial No. S411364)	6 May 09	6 Aug 09
13		Turbidimeter HACH 2100p (Serial No. 08070C31408)	4 May 09	4 Aug 09

Note: Calibration certificates will only provide when monitoring equipment is re-calibrate or new.

## TSP SAMPLER CALIBRATION CALCULATION SPREADSHEET

Location :	Man Uk Pin Near DD46 Lot 820	Date of Calibration: 10-Jun-09
Location ID :	MUP-A1	Next Calibration Date: 10-Sep-09
		Technician: Mr. Ben Tam

### CONDITIONS

Sea Level Pressure (hPa)	1006.4	Corrected Pressure (mm Hg)	754.8
Temperature (°C)	28.3	Temperature (K)	301

### CALIBRATION ORIFICE

Make->	TISCH	Qstd Slope ->	1.54431
Model->	515N	Qstd Intercept ->	-0.01988

### CALIBRATION

Plate No.	H2O (L) (in)	H2O (R) (in)	H2O (in)	Qstd (m3/min)	I (chart)	IC corrected	LINEAR REGRESSION		
							Slope =	Intercept =	Corr. coeff. =
18	4.9	4.9	9.8	2.022	48	47.31	Slope = 33.3454 Intercept = -21.1631 Corr. coeff. = 0.9981		
13	4.2	4.2	8.4	1.873	41	40.41			
10	3.3	3.3	6.6	1.662	34	33.51			
7	2.1	2.1	4.2	1.328	24	23.66			
5	1.3	1.3	2.6	1.048	14	13.80			

**Calculations :**

$$Qstd = 1/m[\text{Sqrt}(H20(Pa/Pstd)(Tstd/Ta))-b]$$

$$IC = I[\text{Sqrt}(Pa/Pstd)(Tstd/Ta)]$$

Qstd = standard flow rate

IC = corrected chart responses

I = actual chart response

m = calibrator Qstd slope

b = calibrator Qstd intercept

Ta = actual temperature during calibration ( deg K )

Pstd = actual pressure during calibration ( mm Hg )

**For subsequent calculation of sampler flow:**

$$1/m(( I )[\text{Sqrt}(298/Tav)(Pav/760)]-b)$$


m = sampler slope

b = sampler intercept

I = chart response

Tav = daily average temperature

Pav = daily average pressure

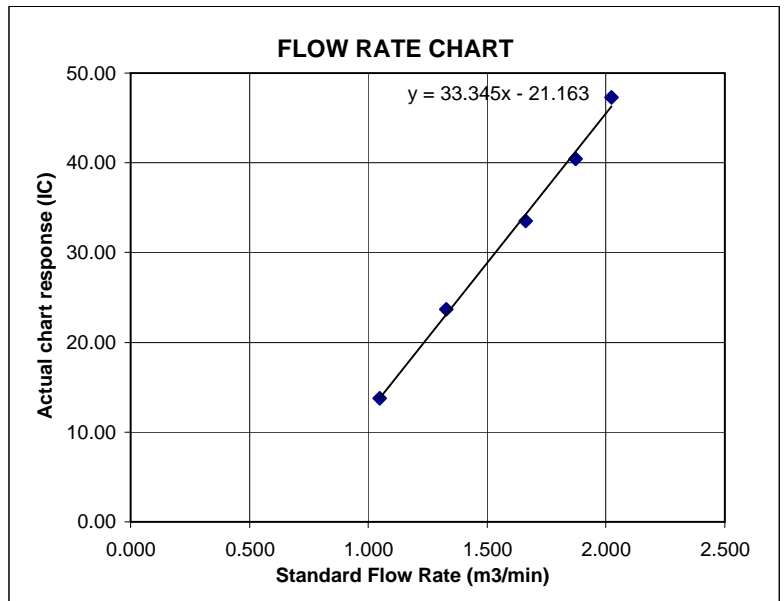

## TSP SAMPLER CALIBRATION CALCULATION SPREADSHEET

Location :	Loi Tung Near DD46 Lot 230	Date of Calibration: 10-Jun-09
Location ID :	MUP-A3	Next Calibration Date: 10-Sep-09
		Technician: Mr. Ben Tam

### CONDITIONS

Sea Level Pressure (hPa)	1006.4	Corrected Pressure (mm Hg)	754.8
Temperature (°C)	28.3	Temperature (K)	301

### CALIBRATION ORIFICE

Make->	TISCH	Qstd Slope ->	1.54431
Model->	515N	Qstd Intercept ->	-0.01988

### CALIBRATION

Plate No.	H2O (L) (in)	H2O (R) (in)	H2O (in)	Qstd (m3/min)	I (chart)	IC corrected	LINEAR REGRESSION
18	4.8	4.8	9.6	2.001	47	46.33	Slope = 34.4154 Intercept = -22.6705 Corr. coeff. = 0.9987
13	4.0	4.0	8.0	1.828	40	39.43	
10	3.0	3.0	6.0	1.585	33	32.53	
7	2.1	2.1	4.2	1.328	24	23.66	
5	1.3	1.3	2.6	1.048	13	12.81	

**Calculations :**

$$Qstd = 1/m[\text{Sqrt}(H20(Pa/Pstd)(Tstd/Ta))-b]$$

$$IC = I[\text{Sqrt}(Pa/Pstd)(Tstd/Ta)]$$

Qstd = standard flow rate

IC = corrected chart responses

I = actual chart response

m = calibrator Qstd slope

b = calibrator Qstd intercept

Ta = actual temperature during calibration ( deg K )

Pstd = actual pressure during calibration ( mm Hg )

**For subsequent calculation of sampler flow:**

$$1/m(( I )[\text{Sqrt}(298/Tav)(Pav/760)]-b)$$


m = sampler slope

b = sampler intercept

I = chart response

Tav = daily average temperature

Pav = daily average pressure

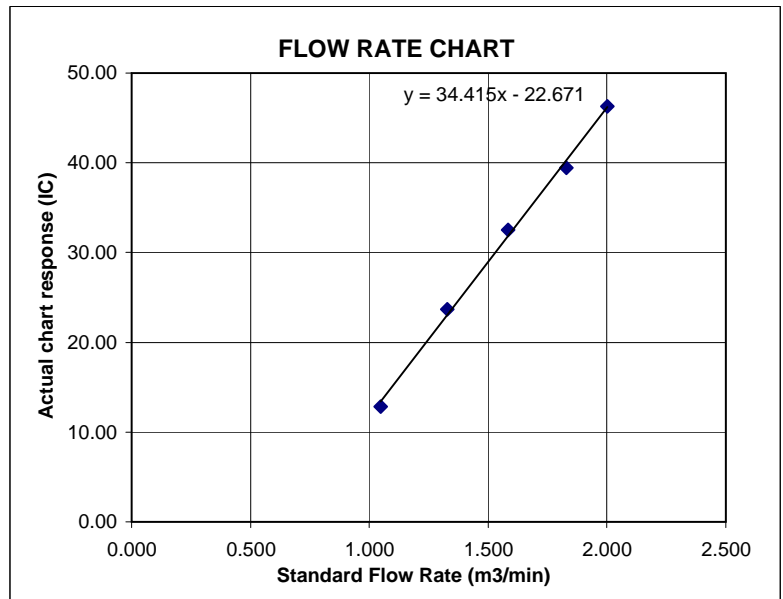



## TSP SAMPLER CALIBRATION CALCULATION SPREADSHEET

Location :	Man Uk Pin Near DD46 Lot 676	Date of Calibration: 10-Jun-09
Location ID :	MUP-A2	Next Calibration Date: 10-Sep-09
		Technician: Mr. Ben Tam

### CONDITIONS

Sea Level Pressure (hPa)	1006.4	Corrected Pressure (mm Hg)	754.8
Temperature (°C)	28.3	Temperature (K)	301

### CALIBRATION ORIFICE

Make->	TISCH	Qstd Slope ->	1.54431
Model->	515N	Qstd Intercept ->	-0.01988

### CALIBRATION

Plate No.	H2O (L) (in)	H2O (R) (in)	H2O (in)	Qstd (m3/min)	I (chart)	IC corrected	LINEAR REGRESSION		
							Slope =	Intercept =	Corr. coeff. =
18	4.8	4.8	9.6	2.001	49	48.30	Slope = 42.0233 Intercept = -36.6086 Corr. coeff. = 0.9971		
13	4	4	8.0	1.828	41	40.41			
10	3.5	3.5	7.0	1.711	34	33.51			
7	2.4	2.4	4.8	1.419	24	23.66			
5	1.7	1.7	3.4	1.196	14	13.80			

**Calculations :**

$$Qstd = 1/m[\text{Sqrt}(H20(Pa/Pstd)(Tstd/Ta))-b]$$

$$IC = I[\text{Sqrt}(Pa/Pstd)(Tstd/Ta)]$$

Qstd = standard flow rate

IC = corrected chart responses

I = actual chart response

m = calibrator Qstd slope

b = calibrator Qstd intercept

Ta = actual temperature during calibration ( deg K )

Pstd = actual pressure during calibration ( mm Hg )

**For subsequent calculation of sampler flow:**

$$1/m(( I )[\text{Sqrt}(298/Tav)(Pav/760)]-b)$$


m = sampler slope

b = sampler intercept

I = chart response

Tav = daily average temperature

Pav = daily average pressure

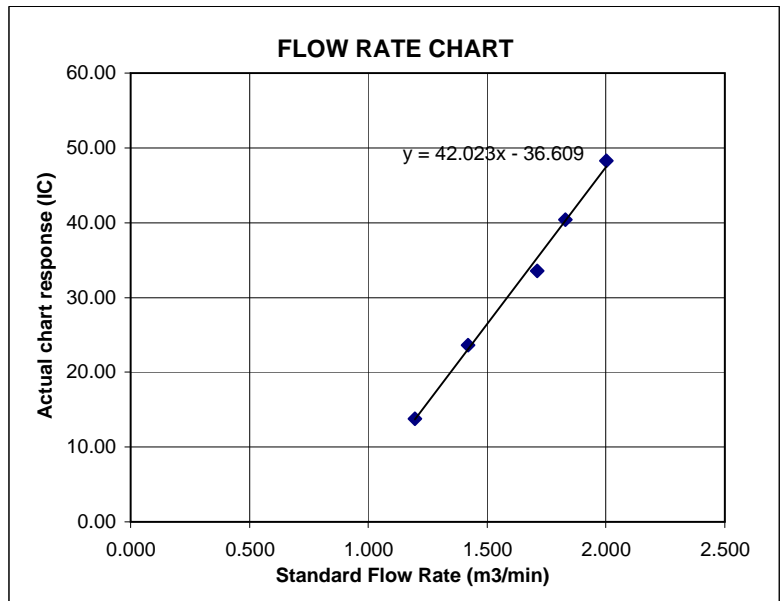

## Equipment Calibration Record

### Equipment Calibrated:

Type: Dust Trak Model 8520  
 Manufacturer: TSI  
 Serial No. 21060  
 Equipment Ref: EQ021

### Standard Equipment:

Standard Equipment: Higher Volume Sampler  
 Location & Location ID: Village house No. 96 of Tai Po Mei (A2)  
 Equipment Ref: A-2  
 Last Calibration Date: 29-Aug-08

### Equipment Calibration Results:

Calibration Date: 30-Aug-08


Hour	Time	Temp °C	RH %	Dust Concentration in mg/m <sup>3</sup>	
				(Standard Equipment)	(Calibrated Equipment)
1	12:15 ~ 13:15	32.7	74	0.049	0.056
1	13:20 ~ 14:20	33.5	74	0.088	0.113
1	14:28 ~ 15:28	35.8	74	0.079	0.092

Sensitivity Adjustment Zero Calibration (Before Calibration): 0 (mg/m<sup>3</sup>)

Sensitivity Adjustment Zero Calibration (After Calibration): 0 (mg/m<sup>3</sup>)

### Linear Regression of Y or X

Slope: 0.0748  
 Correlation Coefficient: 0.9958  
 Validity of Calibration Record: 30-Aug-09

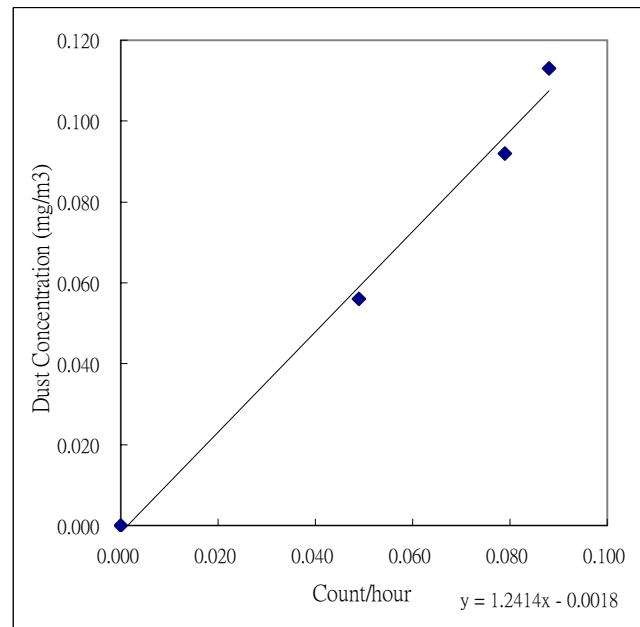

Operator : Ben Tam

Signature : [Signature]

Date : 2008/8/30

QC Reviewer F.N.Wong

Signature : [Signature]

Date : 2008/8/30

## Equipment Calibration Record

### Equipment Calibrated:

Type: Dust Trak Model 8520  
 Manufacturer: TSI  
 Serial No. 23080  
 Equipment Ref: EQ063

### Standard Equipment:

Standard Equipment: Higher Volume Sampler  
 Location & Location ID: Village house No. 96 of Tai Po Mei (A2)  
 Equipment Ref: A-2  
 Last Calibration Date: 29-Aug-08

### Equipment Calibration Results:

Calibration Date: 30-Aug-08


Hour	Time	Temp °C	RH %	Dust Concentration in mg/m <sup>3</sup>	
				(Standard Equipment)	(Calibrated Equipment)
1	12:15 ~ 13:15	32.7	74	0.049	0.068
1	13:20 ~ 14:20	33.5	74	0.088	0.127
1	14:28 ~ 15:28	35.8	74	0.079	0.111

Sensitivity Adjustment Zero Calibration (Before Calibration) 0 (mg/m<sup>3</sup>)

Sensitivity Adjustment Zero Calibration (After Calibration) 0 (mg/m<sup>3</sup>)

### Linear Regression of Y or X

Slope: 0.0801  
 Correlation Coefficient 0.9996  
 Validity of Calibration Record 30-Aug-09

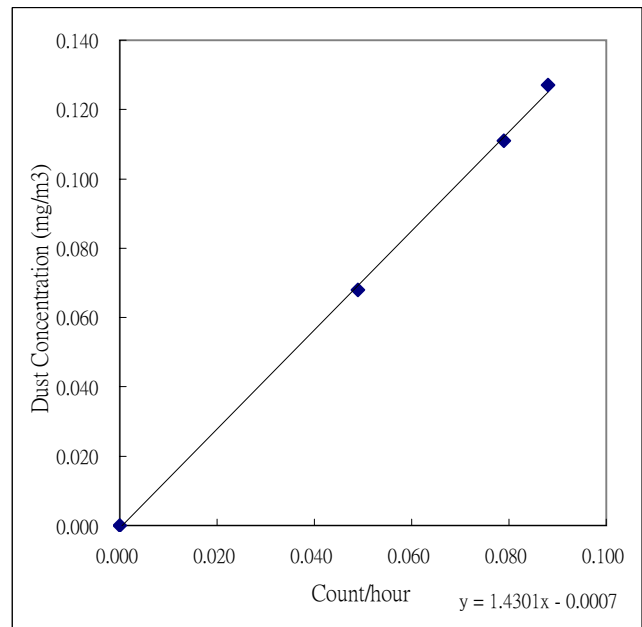

Operator : Ben Tam

Signature : [Signature]

Date : 2008/8/30

QC Reviewer F.N.Wong

Signature : [Signature]

Date : 2008/8/30

## Equipment Calibration Record

### Equipment Calibrated:

Type: Dust Trak Model 8520  
 Manufacturer: TSI  
 Serial No. 23079  
 Equipment Ref: EQ064

### Standard Equipment:

Standard Equipment: Higher Volume Sampler  
 Location & Location ID: Village house No. 96 of Tai Po Mei (A2)  
 Equipment Ref: A-2  
 Last Calibration Date: 29-Aug-08

### Equipment Calibration Results:

Calibration Date: 30-Aug-08


Hour	Time	Temp °C	RH %	Dust Concentration in mg/m <sup>3</sup>	
				(Standard Equipment)	(Calibrated Equipment)
1	12:15 ~ 13:15	32.7	74	0.049	0.053
1	13:20 ~ 14:20	33.5	74	0.088	0.109
1	14:28 ~ 15:28	35.8	74	0.079	0.101

Sensitivity Adjustment Zero Calibration (Before Calibration): 0 (mg/m<sup>3</sup>)

Sensitivity Adjustment Zero Calibration (After Calibration): 0 (mg/m<sup>3</sup>)

### Linear Regression of Y or X

Slope: 0.0792  
 Correlation Coefficient: 0.9960  
 Validity of Calibration Record: 30-Aug-09

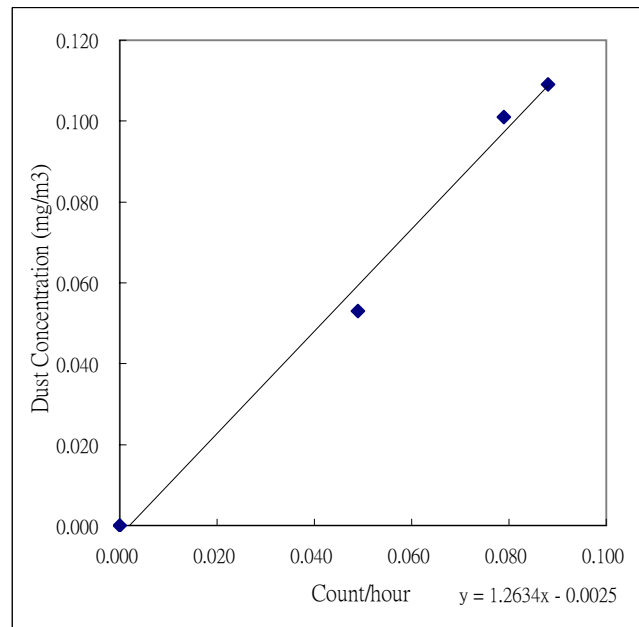

Operator : Ben Tam

Signature : [Signature]

Date : 2008/8/30

QC Reviewer F.N.Wong

Signature : [Signature]

Date : 2008/8/30

# CERTIFICATE OF ANALYSIS




Batch: HK0907263  
Date of Issue: 21/04/2009  
Client: ACTION UNITED ENVIRO SERVICES  
Client Reference:

## Calibration of Thermometer

Item : YSI Multimeter  
Model No. : YSI 550A  
Serial No. : 05F2063AZ  
Equipment No.: - -  
Calibration Method : In-house Method  
Date of Calibration : 21 April, 2009

### Testing Results :

Reference Temperature (°C)	Recorded Temperature (°C)
23.5 °C	23.3 °C
31.5 °C	31.4 °C
Allowing Deviation	±2.0°C

  
Ms Wong Wai Man, Alice  
Laboratory Manager - Hong Kong

# CERTIFICATE OF ANALYSIS



Batch: HK0907263  
Date of Issue: 21/04/2009  
Client: ACTION UNITED ENVIRO SERVICES  
Client Reference:

## Calibration of DO System

Item : YSI Multimeter

Model No. : YSI 550A

Serial No. : 05F2063AZ

Equipment No. : - -

Calibration Method : This meter was calibrated in accordance with standard method APHA (18th Ed.) 4500-0C & G

Date of Calibration : 21 April, 2009

Testing Results :

Expected Reading	Recording Reading
2.87 mg/L	3.06 mg/L
4.66 mg/L	4.85 mg/L
8.30 mg/L	8.16 mg/L
Allowing Deviation	±0.2 mg/L

  
Ms. Wong Wai Man, Alice  
Laboratory Manager - Hong Kong

# CERTIFICATE OF ANALYSIS




Batch: HK0914287  
Date of Issue: 17/07/2009  
Client: ACTION UNITED ENVIRO SERVICES  
Client Reference:

## Calibration of Thermometer

Item : YSI Multimeter  
Model No. : YSI 550A  
Serial No. : 05F2063AZ  
Equipment No.: - -  
Calibration Method : In-house Method  
Date of Calibration : 17 July, 2009

### Testing Results :

Reference Temperature (°C)	Recorded Temperature (°C)
23.5 °C	23.1 °C
27.0 °C	26.4 °C
Allowing Deviation	±2.0°C

  
Mr. Chan Kwok Fai, Godfrey  
Laboratory Manager - Hong Kong

# CERTIFICATE OF ANALYSIS




Batch: HK0914287  
Date of Issue: 17/07/2009  
Client: ACTION UNITED ENVIRO SERVICES  
Client Reference:

## Calibration of DO System

Item : YSI Multimeter  
Model No. : YSI 550A  
Serial No. : 05F2063AZ  
Equipment No. : --  
Calibration Method : This meter was calibrated in accordance with standard method APHA (18th Ed.) 4500-0C & G  
Date of Calibration : 17 July, 2009

### Testing Results :

Expected Reading	Recording Reading
5.18 mg/L	5.33 mg/L
5.59 mg/L	5.55 mg/L
7.34 mg/L	7.51 mg/L
Allowing Deviation	±0.2 mg/L

  
Mr Chan Kwok Fai, Godfrey  
Laboratory Manager - Hong Kong



# CERTIFICATE OF ANALYSIS




Batch: HK0908673  
Date of Issue: 12/05/2009  
Client: ACTION UNITED ENVIRO SERVICES  
Client Reference:

## Calibration of pH System

Item : HANNA pH Meter  
Model No. : HI98107  
Serial No. : S411364  
Equipment No. : --  
Calibration Method : This meter was calibrated in accordance with standard method APHA (19th Ed.) 4500-H<sup>+</sup>B  
Date of Calibration : 06 May, 2009

### Testing Results :

Expected Reading	Recording Reading
4.0	4.1
7.0	7.1
10.0	9.9
Allowing Deviation	$\pm 0.2$

  
Ms Wong Wai Man, Alice  
Laboratory Manager - Hong Kong



# CERTIFICATE OF ANALYSIS


**Batch:** HK0907985  
**Date of Issue:** 04/05/2009  
**Client:** ACTION UNITED ENVIRO SERVICES  
**Client Reference:** DC\_2007\_08 - DRAINAGE IMPROVEMENT WORKS AT TAI PO TIN, PING CHE, MAN UK PIN AND LIN MA HANG


## Calibration of Turbidity System

**Item :** Portable Turbidimeter  
**Model No. :** HACH 2100P  
**Serial No. :** 08070C031408  
**Equipment No. :** 3054010  
**Calibration Method :** This meter was calibrated in accordance with standard method APHA (19th Ed.) 2130B  
**Date of Calibration :** 04 May, 2009

### Testing Results :

Expected Reading	Recording Reading
0.00 NTU	0.19 NTU
4.00 NTU	3.85 NTU
16.0 NTU	16.7 NTU
80.0 NTU	83.2 NTU
160 NTU	166 NTU
Allowing Deviation	±10%

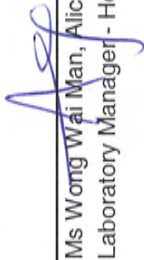  
 Ms Wong Wai Man, Alice  
 Laboratory Manager - Hong Kong



輝創工程有限公司

Sun Creation Engineering Limited Calibration and Testing Laboratory

Certificate No. : C092085

## Certificate of Calibration

*This is to certify that the equipment*

*Description : Integrating Sound Level Meter (EQ006)*

*Manufacturer : Bruel & Kjaer*

*Model No. : 2238*

*Serial No. : 2285762*

*has been calibrated for the specific items and ranges.  
The results are shown in the Calibration Report No. C092085.*

*The equipment is supplied by*

*Co. Name : Action-United Environmental Services and Consulting*

*Address : Unit A, 20/F., Gold King Industrial Building,  
35-41 Tai Lin Pai Road, Kwai Chung, N.T.*

*Date of Issue : 30 April 2009*

*Certified by :*

*K C Lee*

The test equipment used for calibration are traceable to the National Standards as specified in this report.  
This report shall not be reproduced except in full and with prior written approval from this laboratory.

Calibration and Testing Laboratory of Sun Creation Engineering Limited


c/o 4/F, Tsing Shan Wan Exchange Building, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong

Tel: 2927 2606

Fax: 2744 8986

E-mail: callab@suncreation.com

Website: www.suncreation.com



輝創工程有限公司

Sun Creation Engineering Limited Calibration and Testing Laboratory

Certificate No. : C092112

## Certificate of Calibration

*This is to certify that the equipment*

*Description : Integrating Sound Level Meter (EQ008)*

*Manufacturer : Bruel & Kjaer*

*Model No. : 2238*

*Serial No. : 2285690*

*has been calibrated for the specific items and ranges.  
The results are shown in the Calibration Report No. C092112.*

*The equipment is supplied by*

*Co. Name : Action-United Environmental Services and Consulting*

*Address : Unit A, 20/F., Gold King Industrial Building,  
35-41 Tai Lin Pai Road, Kwai Chung, N.T.*

*Date of Issue : 30 April 2009*

*Certified by :*

*K/C Lee*

The test equipment used for calibration are traceable to the National Standards as specified in this report.  
This report shall not be reproduced except in full and with prior written approval from this laboratory.

Calibration and Testing Laboratory of Sun Creation Engineering Limited


c/o 4/F, Tsing Shan Wan Exchange Building, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong

Tel: 2927 2606

Fax: 2744 8986

E-mail: callab@suncreation.com

Website: www.suncreation.com



輝創工程有限公司

Sun Creation Engineering Limited Calibration and Testing Laboratory

Certificate No. : C092064

## Certificate of Calibration

*This is to certify that the equipment*

*Description : Acoustical Calibrator (EQ017)*

*Manufacturer : Bruel & Kjaer*

*Model No. : 4231*

*Serial No. : 2292168*

*has been calibrated for the specific items and ranges.  
The results are shown in the Calibration Report No. C092064.*


*The equipment is supplied by*

*Co. Name : Action-United Environmental Services and Consulting*

*Address : Unit A, 20/F., Gold King Industrial Building,  
35-41 Tai Lin Pai Road, Kwai Chung, N.T.*

*Date of Issue : 28 April 2009*

*Certified by :*

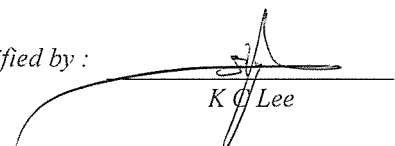  
K O Lee

The test equipment used for calibration are traceable to the National Standards as specified in this report.  
This report shall not be reproduced except in full and with prior written approval from this laboratory.

Calibration and Testing Laboratory of Sun Creation Engineering Limited


c/o 4/F, Tsing Shan Wan Exchange Building, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong

Tel: 2927 2606

Fax: 2744 8986

E-mail: callab@suncreation.com

Website: www.suncreation.com



輝創工程有限公司

Sun Creation Engineering Limited Calibration and Testing Laboratory

Certificate No. : C092063

## *Certificate of Calibration*

*This is to certify that the equipment*

*Description : Acoustical Calibrator (EQ081)*

*Manufacturer : Bruel & Kjaer*

*Model No. : 4231*

*Serial No. : 2326408*

*has been calibrated for the specific items and ranges.  
The results are shown in the Calibration Report No. C092063.*


*The equipment is supplied by*

*Co. Name : Action-United Environmental Services and Consulting*

*Address : Unit A, 20/F., Gold King Industrial Building,  
35-41 Tai Lin Pai Road, Kwai Chung, N.T.*

*Date of Issue : 28 April 2009*

*Certified by :*

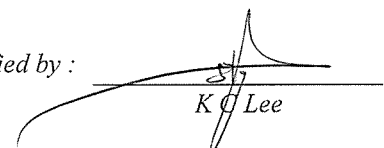  
K O Lee

The test equipment used for calibration are traceable to the National Standards as specified in this report.  
This report shall not be reproduced except in full and with prior written approval from this laboratory.

Calibration and Testing Laboratory of Sun Creation Engineering Limited

c/o 4/F, Tsing Shan Wan Exchange Building, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong

Tel: 2927 2606

Fax: 2744 8986

E-mail: callab@suncreation.com

Website: www.suncreation.com

## **Appendix F**

### **Details of the Event Action Plan**

**Event/Action Plan for Air Quality**

EVENT	ACTION			
	ET Leader	IEC	ER	Contractor
<b>ACTION LEVEL</b>				
Exceedance for one sample	<ol style="list-style-type: none"> <li>1. Identify source</li> <li>2. Inform IEC, ER and Contractor</li> <li>3. Repeat measurement to confirm findings</li> <li>4. Increase monitoring frequency to daily</li> </ol>	<ol style="list-style-type: none"> <li>1. Check monitoring data submitted by ET Leader</li> <li>2. Check Contractor's working method</li> </ol>	<ol style="list-style-type: none"> <li>1. Notify Contractor</li> </ol>	<ol style="list-style-type: none"> <li>1. Rectify any unacceptable practice</li> <li>2. Amend working methods if appropriate</li> </ol>
Exceedance for two or more consecutive samples	<ol style="list-style-type: none"> <li>1. Identify source</li> <li>2. Inform IEC, ER and Contractor</li> <li>3. Repeat measurement to confirm findings</li> <li>4. Increase monitoring frequency to daily</li> <li>5. Discuss with IEC, Contractor and ER on remedial actions required</li> <li>6. If exceedance continue, arrange meeting with IEC, ER and Contractor</li> <li>7. If exceedance stops, cease additional monitoring</li> </ol>	<ol style="list-style-type: none"> <li>1. Check monitoring data submitted by ET Leader</li> <li>2. Check Contractor's working method</li> <li>3. Discuss with ET Leader and Contractor on possible remedial measures</li> <li>4. Advise the ER on the effectiveness of the proposed remedial measures</li> <li>5. Supervise implementation of remedial measures</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm receipt of notification of failure in writing</li> <li>2. Notify Contractor</li> <li>3. Ensure remedial measure properly implemented</li> </ol>	<ol style="list-style-type: none"> <li>1. Submit proposals for remedial actions to IEC and ER within 3 working days notification</li> <li>2. Implement the agreed proposals</li> <li>3. Amend proposal if appropriate</li> </ol>
<b>LIMIT LEVEL</b>				
Exceedance for one sample	<ol style="list-style-type: none"> <li>1. Identify source</li> <li>2. Inform IEC, ER, EPD and Contractor</li> <li>3. Repeat measurement to confirm findings</li> <li>4. Increase monitoring frequency to daily</li> <li>5. Access effectiveness of Contractor's remedial actions and kept IEC, EPD and ER informed of results</li> </ol>	<ol style="list-style-type: none"> <li>1. Check monitoring data submitted by ET Leader</li> <li>2. Check Contractor's working method</li> <li>3. Discuss with ET Leader and Contractor on possible remedial measures</li> <li>4. Advise the ER on the effectiveness of the proposed remedial measures</li> <li>5. Audit implementation of remedial measures</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm receipt of notification of failure in writing</li> <li>2. Notify Contractor</li> <li>3. Ensure remedial measures properly implemented</li> </ol>	<ol style="list-style-type: none"> <li>1. Take immediate action to avoid for the exceedance</li> <li>2. Submit proposals for remedial actions to IEC and ER within 3 working days of notification</li> <li>3. Implement the agreed proposals</li> <li>4. Amend proposal if appropriate</li> </ol>
Exceedance for two or more consecutive samples	<ol style="list-style-type: none"> <li>1. Notify IEC, ER, Contractor and EPD</li> <li>2. Identify source</li> <li>3. Repeat measurement to confirm findings</li> <li>4. Increase monitoring frequency to daily</li> <li>5. Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented</li> <li>6. Arrange meeting with IEC, Contractor and ER to discuss the remedial actions to be taken</li> <li>7. Access effectiveness of Contractor's remedial actions and kept IEC, EPD and ER informed of results</li> <li>8. If exceedance stops, cease additional monitoring</li> </ol>	<ol style="list-style-type: none"> <li>1. Discuss amongst ER, ET Leader and Contractor on the potential remedial actions</li> <li>2. Review Contractor's remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly</li> <li>3. Audit the implementation of remedial measures</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm receipt of notification of failure in writing</li> <li>2. Notify Contractor</li> <li>3. In consultation with IEC, agree with the Contractor on the remedial measures to be implemented</li> <li>4. Ensure remedial measures properly implemented</li> <li>5. If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated.</li> </ol>	<ol style="list-style-type: none"> <li>1. Take immediate action to avoid for the exceedance</li> <li>2. Submit proposals for remedial actions to IEC and ER within 3 working days of notification</li> <li>3. Implement the agreed proposals</li> <li>4. Resubmit proposals if problem still not under control</li> <li>5. Stop the relevant portion of works as determined by the ER unit the exceedance is abate</li> </ol>



**Event/Action Plan for Water Quality**

EVENT	ET Leader	IEC	ER	Contractor
Action Level being exceeded by one sampling day	<ol style="list-style-type: none"> <li>Repeat in-situ measurement to confirm findings</li> <li>Identify source(s) of impact</li> <li>Inform IEC and Contractor</li> <li>Check monitoring data, all plant, equipment and Contractor's working methods</li> <li>Discuss mitigation measures with IEC and Contractor</li> <li>Repeat measurement on next day of exceedance</li> </ol>	<ol style="list-style-type: none"> <li>Discuss with ET and Contractor on the mitigation measures</li> <li>Review proposals on mitigation measures submitted by Contractor and advise the ER accordingly</li> <li>Assess the effectiveness of the implemented mitigation measures</li> </ol>	<ol style="list-style-type: none"> <li>Discuss with IEC on the proposed mitigation measures</li> <li>Make agreement on the mitigation measures to be implemented</li> <li>Assess effectiveness of the implemented mitigation measures</li> </ol>	<ol style="list-style-type: none"> <li>Inform the ER and confirm notification of the non-compliance in writing</li> <li>Rectify unacceptable practice</li> <li>Check all plant and equipment</li> <li>Consider changes of working methods</li> <li>Discuss with ET and IEC and propose mitigation measures to IEC and ER</li> <li>Implement the agreed mitigation measures</li> </ol>
Action Level being exceeded by more than one consecutive sampling day	<ol style="list-style-type: none"> <li>Repeat in-situ measurement to confirm findings</li> <li>Identify source(s) of impact</li> <li>Inform IEC and Contractor</li> <li>Check monitoring data, all plant, equipment and Contractor's working methods</li> <li>Discuss mitigation measures with IEC and Contractor</li> <li>Ensure mitigation measures are implemented</li> <li>Prepare to increase the monitoring frequency to daily</li> <li>Repeat measurement on next day of exceedance</li> </ol>	<ol style="list-style-type: none"> <li>Discuss with ET and Contractor on the mitigation measures</li> <li>Review proposals on mitigation measures submitted by Contractor and advise the ER accordingly</li> <li>Assess the effectiveness of the implemented mitigation measures</li> </ol>	<ol style="list-style-type: none"> <li>Discuss with IEC on the proposed mitigation measures</li> <li>Make agreement on the mitigation measures to be implemented</li> <li>Assess effectiveness of the implemented mitigation measures</li> </ol>	<ol style="list-style-type: none"> <li>Inform the ER and confirm notification of the non-compliance in writing</li> <li>Rectify unacceptable practice</li> <li>Check all plant and equipment</li> <li>Consider changes of working methods</li> <li>Discuss with ET and IEC and propose mitigation measures to IEC and ER within 3 working days</li> <li>Implement the agreed mitigation measures</li> </ol>
Limit Level being exceeded by one sampling day	<ol style="list-style-type: none"> <li>Repeat in-situ measurement to confirm findings</li> <li>Identify source(s) of impact</li> <li>Inform IEC, Contractor and EPD</li> <li>Check monitoring data, all plant, equipment and Contractor's working methods</li> <li>Discuss mitigation measures with IEC, ER and Contractor</li> <li>Ensure mitigation measures are implemented</li> <li>Increase the monitoring frequency to daily until no exceedance of Limit Level</li> </ol>	<ol style="list-style-type: none"> <li>Discuss with ET and Contractor on the mitigation measures</li> <li>Review proposals on mitigation measures submitted by Contractor and advise the ER accordingly</li> <li>Assess the effectiveness of the implemented mitigation measures</li> </ol>	<ol style="list-style-type: none"> <li>Discuss with IEC on the proposed mitigation measures</li> <li>Request Contractor to critically review the working methods</li> <li>Make agreement on the mitigation measures to be implemented</li> <li>Assess effectiveness of the implemented mitigation measures</li> </ol>	<ol style="list-style-type: none"> <li>Inform the ER and confirm notification of the non-compliance in writing</li> <li>Rectify unacceptable practice</li> <li>Check all plant and equipment</li> <li>Consider changes of working methods</li> <li>Discuss with ET and IEC and propose mitigation measures to IEC and ER within 3 working days</li> <li>Implement the agreed mitigation measures</li> </ol>
Limit Level being exceeded by more than one consecutive sampling day	<ol style="list-style-type: none"> <li>Repeat in-situ measurement to confirm findings</li> <li>Identify source(s) of impact</li> <li>Inform IEC, Contractor and EPD</li> <li>Check monitoring data, all plant, equipment and Contractor's working methods</li> <li>Discuss mitigation measures with IEC, ER and Contractor</li> <li>Ensure mitigation measures are implemented</li> <li>Increase the monitoring frequency to daily until no exceedance of Limit Level for two consecutive days</li> </ol>	<ol style="list-style-type: none"> <li>Discuss with ET and Contractor on the mitigation measures</li> <li>Review proposals on mitigation measures submitted by Contractor and advise the ER accordingly</li> <li>Assess the effectiveness of the implemented mitigation measures</li> </ol>	<ol style="list-style-type: none"> <li>Discuss with IEC on the proposed mitigation measures</li> <li>Request Contractor to critically review the working methods</li> <li>Make agreement on the mitigation measures to be implemented</li> <li>Assess effectiveness of the implemented mitigation measures</li> <li>Consider and instruct, if necessary, the Contractor to slow down or to stop all or part of the work until no exceedance of Limit Level</li> </ol>	<ol style="list-style-type: none"> <li>Inform the ER and confirm notification of the non-compliance in writing</li> <li>Rectify unacceptable practice</li> <li>Check all plant and equipment</li> <li>Consider changes of working methods</li> <li>Discuss with ET and IEC and propose mitigation measures to IEC and ER within 3 working days</li> <li>Implement the agreed mitigation measures</li> <li>As directed by the ER, to slow down or to stop all or part of the work or construction activities</li> </ol>

**Event/Action Plan for Ecology**

EVENT	ACTION			
	ET Leader	IEC	ER	Contractor
Non-conformity on one occasion	<ol style="list-style-type: none"> <li>1. Identify source</li> <li>2. Inform the IEC and ER</li> <li>3. Discuss remedial actions with IEC, the ER and the Contractor</li> <li>4. Monitor remedial actions until rectification has been completed</li> </ol>	<ol style="list-style-type: none"> <li>1. Check monitoring results</li> <li>2. Check the Contractor's working method</li> <li>3. Discuss with the ET and Contractor on possible remedial measures</li> <li>4. Advise the ER on effectiveness of proposed remedial measures</li> <li>5. Check the implementation of remedial measures</li> </ol>	<ol style="list-style-type: none"> <li>1. Notify Contractor</li> <li>2. Ensure remedial measures are properly implemented</li> <li>3. Consider and instruct, if necessary, the Contractor to slow down or to stop all or part of the works in the case of serious non-conformity until situation is rectified</li> </ol>	<ol style="list-style-type: none"> <li>1. Take immediate action to avoid further problem</li> <li>2. Amend working methods if needed</li> <li>3. Submit proposals for remedial actions to ET, ER and IEC</li> <li>4. Rectify damage and implement the agreed remedial actions</li> </ol>
Repeated Non-conformity	<ol style="list-style-type: none"> <li>1. Identify source</li> <li>2. Inform the IEC, ER, EPD and AFCD</li> <li>3. Increase monitoring frequency</li> <li>4. Discuss remedial actions with IEC, the ER and the Contractor</li> <li>5. Monitor remedial actions until rectification has been completed</li> <li>6. If exceedance stops, cease additional monitoring</li> </ol>	<ol style="list-style-type: none"> <li>1. Check monitoring results</li> <li>2. Check the Contractor's working method</li> <li>3. Discuss with the ET and Contractor on possible remedial measures</li> <li>4. Supervise the implementation of remedial measures</li> <li>5. Advise the ER on effectiveness of proposed remedial measures and keep EPD and AFCD informed</li> </ol>	<ol style="list-style-type: none"> <li>1. Notify Contractor</li> <li>2. Ensure remedial measures are properly implemented</li> <li>3. Consider and instruct, if necessary, the Contractor to slow down or to stop all or part of the works in the case of serious non-conformity until situation is rectified</li> </ol>	<ol style="list-style-type: none"> <li>1. Take immediate action to avoid further problem</li> <li>2. Amend working methods if needed</li> <li>3. Submit proposals for remedial actions to ET, ER and IEC</li> <li>4. Rectify damage and implement the agreed remedial actions</li> </ol>

**Event/Action Plan for Landscape and Visual Impact**

EVENT	ACTION			
	ET Leader	IEC	ER	Contractor
Non-conformity on one occasion	<ol style="list-style-type: none"> <li>1. Identify source</li> <li>2. Inform the IEC and the ER</li> <li>3. Discuss remedial actions with IEC, the ER and the Contractor</li> <li>4. Monitor remedial actions until rectification has been completed</li> </ol>	<ol style="list-style-type: none"> <li>1. Check report</li> <li>2. Check the Contractor's working method</li> <li>3. Discuss with the ET and Contractor on possible remedial measures</li> <li>4. Advise the ER on effectiveness of proposed remedial measures</li> </ol>	<ol style="list-style-type: none"> <li>1. Notify the Contractor</li> <li>2. Ensure remedial measures are properly implemented.</li> </ol>	<ol style="list-style-type: none"> <li>1. Amend working methods if needed</li> <li>2. Rectify damage and undertake remedial measures or any necessary replacement</li> </ol>
Repeated Non-conformity	<ol style="list-style-type: none"> <li>1. Identify source</li> <li>2. Inform the IEC, ER, EPD and AFCD</li> <li>3. Increase monitoring (site audit) frequency</li> <li>4. Discuss remedial actions with IEC, the ER and the Contractor</li> <li>5. Monitor remedial actions until rectification has been completed</li> <li>6. If exceedance stops, cease additional monitoring (site audit)</li> </ol>	<ol style="list-style-type: none"> <li>1. Check report</li> <li>2. Check the Contractor's working method</li> <li>3. Discuss with the ET and Contractor on possible remedial measures</li> <li>4. Advise the ER on effectiveness of proposed remedial measures.</li> <li>5. Supervise the implementation of remedial measures</li> </ol>	<ol style="list-style-type: none"> <li>1. Notify Contractor</li> <li>2. Ensure remedial measures are properly implemented</li> </ol>	<ol style="list-style-type: none"> <li>1. Amend working methods if needed</li> <li>2. Rectify damage and undertake remedial measures or any necessary replacement</li> </ol>

**Event/Action Plan for Construction Noise**

EVENT	Action			
	ET Leader	IEC	ER	Contractor
Action Level	<ol style="list-style-type: none"> <li>1. Notify IEC, Contractor and ER</li> <li>2. Carry out investigation and identify source</li> <li>3. Report the results of investigation to IEC, Contractor and ER</li> <li>4. Discuss with the Contractor and formulate remedial measures</li> <li>5. Increase monitoring frequency</li> <li>6. Check compliance to Action/Limit Levels after application of mitigation measures</li> </ol>	<ol style="list-style-type: none"> <li>1. Review the analysed results submitted by the ET Leader</li> <li>2. Review the proposed remedial measures by the Contractor and advise the ER &amp; ER accordingly</li> <li>3. Review the implementation of remedial measures</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm receipt of notification of complaint in writing</li> <li>2. Notify Contractor</li> <li>3. Check monitoring data submitted by the ET</li> <li>4. Require Contractor to propose remedial measures for the analysed noise problem</li> <li>5. Ensure remedial measures are properly implemented</li> </ol>	<ol style="list-style-type: none"> <li>1. Submit noise mitigation proposals to ER and IEC within three working days</li> <li>2. Liaise with the ER to ensure the effectiveness of the agreed mitigation</li> <li>3. Amend proposal if required</li> <li>4. Implement noise mitigation proposals</li> </ol>
Limit Level	<ol style="list-style-type: none"> <li>1. Notify IEC, Contractor and ER</li> <li>2. Identify source</li> <li>3. Repeat measurement to confirm findings</li> <li>4. Increase monitoring frequency</li> <li>5. Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented</li> <li>6. Inform IEC, ER and EPD the causes &amp; actions taken from the exceedances</li> <li>7. Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results</li> <li>8. If exceedance stops, cease additional monitoring</li> </ol>	<ol style="list-style-type: none"> <li>1. Check monitoring data submitted by ET</li> <li>2. Discuss amongst ER, ET Leader and Contractor on the potential remedial actions</li> <li>3. Review Contractor's remedial actions whenever necessary to assure their effectiveness and advise the ER &amp; ET accordingly</li> <li>4. Audit the implementation of remedial measures</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm receipt of notification of exceedance</li> <li>2. Notify Contractor</li> <li>3. Check monitoring data submitted by the ET</li> <li>4. Require Contractor to propose remedial measures for the analysed noise problem</li> <li>5. Discuss with ET, IEC and Contractor on proposed remedial actions to be implemented</li> <li>6. Ensure remedial measures are properly implemented</li> <li>7. Assess the effectiveness of the remedial actions and keep the Contractor informed</li> <li>8. If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated</li> </ol>	<ol style="list-style-type: none"> <li>1. Take immediate action to avoid further exceedance</li> <li>2. Submit proposals for remedial actions to ER within three working days of notification</li> <li>3. Liaise with the ER to ensure the effectiveness of the agreed mitigation</li> <li>4. Amend proposal if required</li> <li>5. Implement the agreed proposals</li> <li>6. Resubmit proposals if problem still not under control</li> <li>7. Stop the relevant portion of works as determined by the ER until the exceedance is abated</li> </ol>

## **Appendix G**

### **Monitoring Schedule**

**Monitoring Schedule for Channels MUP in this reporting month**

Date		Air Quality		NOISE 30MIN	LEQ	WATER QUALITY	ECOLOGY	
		1-Hour TSP	24-Hour TSP				Water Quality	ECOLOGY SURVEYS
26-June-09	Fri							
27-June-09	Sat							
28-June-09	Sun							
29-June-09	Mon							
30-June-09	Tue							
1-July-09	Wed							
2-July-09	Thu							
3-July-09	Fri							
4-July-09	Sat							
5-July-09	Sun							
6-July-09	Mon							
7-July-09	Tue							
8-July-09	Wed							
9-July-09	Thu							
10-July-09	Fri							
11-July-09	Sat							
12-July-09	Sun							
13-July-09	Mon							
14-July-09	Tue							
15-July-09	Wed							
16-July-09	Thu							
17-July-09	Fri							
18-July-09	Sat							
19-July-09	Sun							
20-July-09	Mon							
21-July-09	Tue							
22-July-09	Wed							
23-July-09	Thu							
24-July-09	Fri							
25-July-09	Sat							

	Monitoring Day
	Sunday or Public Holiday

Parameters:

Air  
 Noise  
 Water

Ecology Survey

Location ID

MUP-A1 (Same as MUP01/02-A1), MUP-A2a, MUP-A3,  
 MUP05-N1 (Same as MUP01/02-N1), MUP-N2, MUP-N3, MUP-N4,  
 MUP-W1 (Same as MUP01/02-W1), MUP-W2 (Same as MUP01/02-W2),  
 MUP-W3, MUP-W4, MUP-W5, MUP-W6  
 As location in MUP05

**Monitoring Schedule for Channels MUP in coming month**

Date		Air Quality		NOISE 30MIN	LEQ	WATER QUALITY	ECOLOGY	
		1-Hour TSP	24-Hour TSP				Water Quality	ECOLOGY SURVEYS
26-July-09	Sun							
27-July-09	Mon							
28-July-09	Tue							
29-July-09	Wed							
30-July-09	Thu							
31-July-09	Fri							
1-Aug-09	Sat							
2-Aug-09	Sun							
3-Aug-09	Mon							
4-Aug-09	Tue							
5-Aug-09	Wed							
6-Aug-09	Thu							
7-Aug-09	Fri							
8-Aug-09	Sat							
9-Aug-09	Sun							
10-Aug-09	Mon							
11-Aug-09	Tue							
12-Aug-09	Wed							
13-Aug-09	Thu							
14-Aug-09	Fri							
15-Aug-09	Sat							
16-Aug-09	Sun							
17-Aug-09	Mon							
18-Aug-09	Tue							
19-Aug-09	Wed							
20-Aug-09	Thu							
21-Aug-09	Fri							
22-Aug-09	Sat							
23-Aug-09	Sun							
24-Aug-09	Mon							
25-Aug-09	Tue							

	Monitoring Day
	Sunday or Public Holiday

**Parameters:**

Air  
 Noise  
 Water

Ecology Survey

**Location ID**

MUP-A1 (Same as MUP01/02-A1), MUP-A2a, MUP-A3,  
 MUP05-N1 (Same as MUP01/02-N1), MUP-N2, MUP-N3, MUP-N4,  
 MUP-W1 (Same as MUP01/02-W1), MUP-W2 (Same as MUP01/02-W2),  
 MUP-W3, MUP-W4, MUP-W5, MUP-W6  
 As location in MUP05

## **Appendix H**

### **Detailed Impact Monitoring Data of Air Quality and Water Quality**

DSD CONTRACT NO. DC/2007/08

Drainage Improvements Works in Tai Po Tin, Ping Che, Man Uk Pin and Lin Ma Hang

DATE	SAMPLE NUMBER	ELAPSED TIME INITIAL	ELAPSED TIME FINAL	ELAPSED TIME (min)	MIN CHART READING	MAX CHART READING	AVG CHART READING	AVG TEMP (oC)	AVG PRESS (hPa)	STANDARD FLOW RATE (m3/min)	AIR VOLUME (std m3)	BLANK SAMPLE NUMBER	BLANK INITIAL WEIGHT (g)	BLANK FINAL WEIGHT (g)	BLANK DIFF WEIGHT (g)	INITIAL FILTER WEIGHT (g)	FINAL FILTER WEIGHT (g)	WEIGHT DUST COLLECTED (g)	Dust 24-hr TSP in Air (ug/m3)	Action Level	Limit Level
<b>24-Hr TSP Monitoring Data for MUP-A1 (same as MUP01/02-A1)</b>																					
26-Jun-09	20012	803.76	827.21	1407.00	38	40	39	28.4	1002.9	1.7916	2520.81	NA	3.6409	3.6419	0.001	2.8180	2.8481	0.0301	12	194	260
3-Jul-09	20071	827.21	850.31	1386.00	38	40	39	29.8	1005.2	1.7903	2481.31	NA	3.6409	3.6419	0.001	2.8438	2.9270	0.0832	33	194	260
9-Jul-09	20101	850.31	873.82	1410.60	38	40	39	29	1006.5	1.7925	2528.56	NA	3.6409	3.6419	0.001	2.8640	2.9311	0.0671	26	194	260
15-Jul-09	20158	873.82	897.3	1408.80	38	40	39	29	1005.2	1.7918	2524.28	NA	3.6409	3.6419	0.001	2.7888	2.8334	0.0446	17	194	260
21-Jul-09	20195	897.3	920.76	1407.60	36	38	37	29.5	1009.3	1.7338	2440.47	NA	3.6409	3.6419	0.001	2.8500	2.9018	0.0518	21	194	260
<b>24-Hr TSP Monitoring Data for MUP-A2a</b>																					
26-Jun-09	20015	762.83	786.45	1417.20	24	26	25	28.4	1002.9	1.4596	2068.60	NA	3.6409	3.6419	0.001	2.8535	2.8824	0.0289	13	178	260
3-Jul-09	20064	786.45	809.94	1409.40	24	26	25	29.8	1005.2	1.4590	2056.24	NA	3.6409	3.6419	0.001	2.7981	2.8704	0.0723	35	178	260
9-Jul-09	20096	809.94	833.63	1421.40	30	32	31	29	1006.5	1.6015	2276.31	NA	3.6409	3.6419	0.001	2.8214	2.8762	0.0548	24	178	260
15-Jul-09	20160	833.63	857.31	1420.80	30	32	31	29	1005.2	1.6010	2274.68	NA	3.6409	3.6419	0.001	2.7914	2.8164	0.0250	11	178	260
21-Jul-09	20201	857.31	881.06	1425.00	29	31	30	29.5	1009.3	1.5783	2249.07	NA	3.6409	3.6419	0.001	2.8069	2.8380	0.0311	13	178	260
<b>24-Hr TSP Monitoring Data for MUP-A3</b>																					
26-Jun-09	20003	785.06	809.87	1488.60	30	32	31	28.4	1002.9	1.5498	2307.00	NA	3.6409	3.6419	0.001	2.8886	2.9238	0.0352	15	178	260
3-Jul-09	20065	809.87	834.69	1489.20	30	32	31	29.8	1005.2	1.5487	2306.37	NA	3.6409	3.6419	0.001	2.8001	2.8296	0.0295	12	178	260
9-Jul-09	20093	834.69	857.81	1387.20	32	34	33	29	1006.5	1.6080	2230.64	NA	3.6409	3.6419	0.001	2.8470	2.9004	0.0534	23	178	260
15-Jul-09	20156	857.81	881.02	1392.60	32	34	33	29	1005.2	1.6074	2238.47	NA	3.6409	3.6419	0.001	2.7837	2.8071	0.0234	10	178	260
21-Jul-09	20197	881.02	904.22	1392.00	34	36	35	29.5	1009.3	1.6661	2319.23	NA	3.6409	3.6419	0.001	2.8216	2.8530	0.0314	13	178	260



DSD CONTRACT NO. DC/2007/08  
 Drainage Improvements Works in Tai Po Tin, Ping Che, Man Uk Pin and Lin Ma Hang

Water Quality Monitoring Data for MUP05

Date 26-Jun-09														
Location	Time	Depth (m)	Temp(oC)		DO (mg/L)		DOS(%)		Turbidity(NTU)		pH		SS	
MUP-W1 (Control) (MUP01/02-W1)	03:15	0.1	27.6	27.6	4.90	4.9	72.40	73.0	42.00	41.3	7.18	7.3	99.00	99.0
					4.91		73.50		40.50		7.37		99.00	
MUP-W2 (Control) (MUP01/02-W2)	02:05	0.3	29.4	29.4	4.86	4.9	62.70	63.8	7.98	8.1	7.43	7.3	4.00	4.0
					4.97		64.80		8.13		7.21		4.00	
MUP-W3 (Control)	02:50	0.2	29.3	29.3	4.02	4.1	48.60	49.1	25.10	26.0	7.11	7.2	8.00	8.0
					4.12		49.60		26.80		7.28		8.00	
MUP-W4 (Impact)	02:20	0.5	28.8	28.8	5.82	5.9	70.40	71.3	18.30	18.3	7.63	7.6	13.00	13.0
					5.97		72.10		18.20		7.51		13.00	
MUP-W5 (mobile)	03:00	0.5	27.2	27.2	4.96	5.0	57.60	58.0	21.90	22.1	7.38	7.4	19.00	19.0
					4.99		58.30		22.20		7.50		19.00	
MUP-W6 (mobile)	02:37	0.5	27.8	27.8	4.94	5.0	76.20	77.2	15.00	15.2	7.30	7.4	16.00	16.0
					5.08		78.20		15.40		7.48		16.00	

Date 29-Jun-09														
Location	Time	Depth (m)	Temp(oC)		DO (mg/L)		DOS(%)		Turbidity(NTU)		pH		SS	
MUP-W1 (Control) (MUP01/02-W1)	02:55	0.1	32.0	32.0	4.02	4.1	50.50	52.0	4.61	4.6	6.99	7.0	5.00	5.0
					4.16		53.40		4.59		6.95		5.00	
MUP-W2 (Control) (MUP01/02-W2)	01:55	0.3	33.0	33.0	3.96	4.0	60.80	61.9	4.32	4.3	7.32	7.4	3.00	3.0
					4.08		62.90		4.23		7.44		3.00	
MUP-W3 (Control)	02:30	0.2	32.0	32.0	5.27	5.3	49.60	51.2	3.95	3.9	6.95	7.0	4.00	4.0
					5.33		52.70		3.87		6.99		4.00	
MUP-W4 (Impact)	02:10	0.5	34.0	34.0	5.65	5.7	62.20	63.0	4.68	4.6	7.18	7.2	4.00	4.0
					5.71		63.80		4.55		7.28		4.00	
MUP-W5 (mobile)	02:40	0.3	33.7	33.7	3.62	3.6	49.90	50.2	4.61	4.6	6.99	7.0	5.00	5.0
					3.63		50.40		4.59		6.95		5.00	
MUP-W6 (mobile)	02:20	0.5	33.4	33.4	5.05	5.1	39.70	39.8	4.68	4.6	7.16	7.2	7.00	7.0
					5.14		39.80		4.56		7.31		7.00	

Date 2-Jul-09														
Location	Time	Depth (m)	Temp(oC)		DO (mg/L)		DOS(%)		Turbidity(NTU)		pH		SS	
MUP-W1 (Control) (MUP01/02-W1)	03:05	0.1	33.1	33.1	5.21	5.3	60.80	62.7	5.93	5.9	7.63	7.5	9.00	9.0
					5.41		64.60		5.87		7.41		9.00	
MUP-W2 (Control) (MUP01/02-W2)	02:00	0.3	28.9	28.9	4.06	4.1	60.00	61.5	4.22	4.2	7.47	7.5	<2	2.0
					4.11		62.90		4.08		7.61		<2	
MUP-W3 (Control)	02:33	0.1	30.1	30.1	3.93	4.0	49.60	50.5	6.66	6.6	7.00	7.3	4.00	4.0
					3.99		51.40		6.58		7.60		4.00	
MUP-W4 (Impact)	02:15	0.5	32.9	32.9	5.31	5.4	68.70	69.1	4.98	4.9	7.33	7.4	<2	2.0
					5.55		69.40		4.88		7.48		<2	
MUP-W5 (mobile)	02:40	0.3	32.1	32.1	5.02	5.1	60.20	61.0	5.14	5.2	7.40	7.4	4.00	4.0
					5.12		61.70		5.31		7.37		4.00	
MUP-W6 (mobile)	02:25	0.3	36.0	36.0	4.58	4.6	33.90	34.5	7.00	7.0	7.10	7.2	3.00	3.0
					4.67		35.00		7.03		7.24		3.00	

Date 4-Jul-09														
Location	Time	Depth (m)	Temp(oC)		DO (mg/L)		DOS(%)		Turbidity(NTU)		pH		SS	
MUP-W1 (Control) (MUP01/02-W1)	11:00	0.3	26.2	26.2	3.26	3.3	39.70	40.4	63.90	59.6	6.95	7.0	47.00	47.0
					3.31		41.00		55.30		7.08		47.00	
MUP-W2 (Control) (MUP01/02-W2)	10:00	0.3	27.5	27.5	3.87	3.8	52.90	51.7	14.60	16.0	7.63	7.8	11.00	11.0
					3.81		50.40		17.30		7.88		11.00	
MUP-W3 (Control)	10:37	0.25	28.0	28.0	3.48	3.4	72.30	71.5	10.60	12.4	8.05	8.0	21.00	21.0
					3.35		70.60		14.10		7.93		21.00	
MUP-W4 (Impact)	10:20	1	26.5	26.5	5.29	5.3	63.40	64.6	12.50	15.2	7.28	7.3	18.00	18.0
					5.37		65.80		17.80		7.33		18.00	
MUP-W5 (mobile)	10:42	1	27.7	27.4	6.18	6.1	88.20	86.1	63.50	64.7	7.02	7.1	66.00	66.0
					6.04		83.90		65.80		7.21		66.00	
MUP-W6 (mobile)	10:30	0.3	27.0	27.0	4.75	4.8	58.20	60.8	18.40	16.7	7.27	7.3	11.00	11.0
					4.91		63.40		14.90		7.42		11.00	

Date 6-Jul-09														
Location	Time	Depth (m)	Temp(oC)		DO (mg/L)		DOS(%)		Turbidity(NTU)		pH		SS	
MUP-W1 (Control) (MUP01/02-W1)	03:00	0.2	30.9	30.9	4.25	4.4	49.40	51.5	5.37	5.4	7.12	7.4	4.00	4.0
					4.46		53.50		5.47		7.61		4.00	
MUP-W2 (Control) (MUP01/02-W2)	01:50	0.3	31.5	31.5	5.02	5.1	60.60	61.2	4.78	4.9	7.48	7.6	6.00	6.0
					5.13		61.70		4.97		7.66		6.00	
MUP-W3 (Control)	02:30	0.2	30.0	30.0	3.06	3.1	39.80	40.9	5.38	5.4	7.26	7.3	61.00	61.0
					3.17		41.90		5.46		7.34		61.00	
MUP-W4 (Impact)	02:10	0.5	30.3	30.3	5.93	5.9	53.30	51.8	5.85	5.9	7.36	7.4	3.00	3.0
					5.84		50.20		5.91		7.45		3.00	
MUP-W5 (mobile)	02:40	0.3	33.0	33.0	4.41	4.5	52.80	54.4	4.95	5.0	7.28	7.3	6.00	6.0
					4.68		55.90		4.99		7.31		6.00	
MUP-W6 (mobile)	02:20	0.3	28.9	28.9	4.66	4.5	49.90	48.3	7.54	7.6	7.20	7.3	6.00	6.0
					4.31		46.70		7.65		7.38		6.00	

DSD CONTRACT NO. DC/2007/08  
 Drainage Improvements Works in Tai Po Tin, Ping Che, Man Uk Pin and Lin Ma Hang

Water Quality Monitoring Data for MUP05

Date 8-Jul-09														
Location	Time	Depth (m)	Temp(oC)		DO (mg/L)		DOS(%)		Turbidity(NTU)		pH		SS	
MUP-W1 (Control) (MUP01/02-W1)	03:00	0.2	29.3	29.3	6.88	6.9	86.40	87.1	13.70	15.8	7.05	7.2	8.00	8.0
			29.3		6.99		87.80		17.80		7.31		8.00	
MUP-W2 (Control) (MUP01/02-W2)	01:55	0.3	34.7	34.7	4.68	4.7	63.20	64.3	3.95	3.9	7.45	7.5	<2	2.0
			34.7		4.79		65.30		3.88		7.56		<2	
MUP-W3 (Control)	02:40	0.2	30.5	30.5	5.94	5.9	87.30	86.1	16.30	17.4	7.40	7.5	5.00	5.0
			30.5		5.90		84.90		18.40		7.56		5.00	
MUP-W4 (Impact)	02:10	0.5	30.2	30.2	5.97	6.0	80.50	81.1	9.21	9.1	7.34	7.4	5.00	5.0
			30.2		6.08		81.60		9.02		7.48		5.00	
MUP-W5 (mobile)	02:47	1	29.2	29.2	4.53	4.6	62.10	63.7	26.90	25.5	7.48	7.4	18.00	18.0
			29.2		4.64		65.30		24.10		7.38		18.00	
MUP-W6 (mobile)	02:30	0.3	28.5	28.5	9.97	10.0	92.80	93.1	5.85	5.8	7.01	7.1	4.00	4.0
			28.5		9.95		93.40		5.76		7.15		4.00	

Date 10-Jul-09														
Location	Time	Depth (m)	Temp(oC)		DO (mg/L)		DOS(%)		Turbidity(NTU)		pH		SS	
MUP-W1 (Control) (MUP01/02-W1)	11:32	0.2	29.5	29.5	6.78	6.8	84.10	85.1	11.60	13.2	7.11	7.1	10.00	10.0
			29.5		6.82		86.00		14.80		7.07		10.00	
MUP-W2 (Control) (MUP01/02-W2)	11:05	0.1	30.2	30.2	4.69	4.8	63.10	64.8	3.64	3.8	7.41	7.5	4.00	4.0
			30.2		4.88		66.50		3.98		7.50		4.00	
MUP-W3 (Control)	11:40	0.1	30.6	30.6	5.90	5.9	86.60	85.4	5.99	6.5	7.39	7.4	4.00	4.0
			30.6		5.82		84.10		7.08		7.43		4.00	
MUP-W4 (Impact)	11:13	0.4	31.7	31.7	5.99	6.0	81.40	82.6	7.81	7.9	7.48	7.5	10.00	10.0
			31.7		6.01		83.70		8.05		7.45		10.00	
MUP-W5 (mobile)	11:21	0.5	31.2	31.2	4.83	4.9	65.50	66.1	6.29	6.7	7.12	7.1	5.00	5.0
			31.2		4.90		66.70		7.17		7.17		5.00	
MUP-W6 (mobile)	11:16	0.4	31.6	31.6	9.66	9.6	89.40	88.9	6.25	6.7	7.12	7.1	7.00	7.0
			31.6		9.54		88.40		7.17		7.17		7.00	

Date 13-Jul-09														
Location	Time	Depth (m)	Temp(oC)		DO (mg/L)		DOS(%)		Turbidity(NTU)		pH		SS	
MUP-W1 (Control) (MUP01/02-W1)	03:00	0.1	32.2	32.2	6.44	6.5	82.70	82.9	22.50	23.0	6.81	6.9	16.00	16.0
			32.2		6.48		83.10		23.40		6.93		16.00	
MUP-W2 (Control) (MUP01/02-W2)	01:50	0.3	29.9	29.9	8.70	8.7	94.80	94.6	6.66	6.8	7.19	7.2	3.00	3.0
			29.9		8.64		94.30		6.84		7.21		3.00	
MUP-W3 (Control)	02:30	0.1	32.4	32.4	3.97	4.0	63.40	63.0	27.00	27.0	6.66	6.7	33.00	33.0
			32.4		4.04		62.50		27.00		6.77		33.00	
MUP-W4 (Impact)	02:10	0.5	30.2	30.2	5.60	5.6	63.40	63.1	12.10	12.0	7.07	7.1	5.00	5.0
			30.2		5.54		62.80		11.80		7.10		5.00	
MUP-W5 (mobile)	02:40	0.5	30.3	30.3	5.06	5.1	69.80	69.4	7.70	7.5	7.24	7.2	8.00	8.0
			30.3		5.13		68.90		7.20		7.19		8.00	
MUP-W6 (mobile)	02:20	0.2	30.0	30.0	6.12	6.1	73.20	72.7	8.06	7.6	6.77	6.8	3.00	3.0
			30.0		6.08		72.10		7.12		6.74		3.00	

Date 15-Jul-09														
Location	Time	Depth (m)	Temp(oC)		DO (mg/L)		DOS(%)		Turbidity(NTU)		pH		SS	
MUP-W1 (Control) (MUP01/02-W1)	02:40	0.1	32.8	32.8	3.65	3.7	56.60	55.3	17.40	17.8	7.19	7.2	16.00	16.0
					3.71		53.90		18.10		7.20		16.00	
MUP-W2 (Control) (MUP01/02-W2)	01:45	0.2	30.5	30.5	5.21	5.2	55.60	56.2	5.39	5.4	7.39	7.4	<2	2.0
					5.24		56.80		5.41		7.44		<2	
MUP-W3 (Control)	02:50	0.1	33.1	33.1	6.27	6.2	78.60	78.1	13.20	13.1	7.78	7.7	19.00	19.0
					6.19		77.60		13.00		7.69		19.00	
MUP-W4 (Impact)	02:02	0.5	30.8	30.8	5.85	5.8	50.90	51.3	7.22	7.3	7.32	7.3	3.00	3.0
					5.80		51.60		7.39		7.35		3.00	
MUP-W5 (mobile)	02:17	0.4	31.3	31.3	5.86	5.8	59.90	59.4	6.74	6.8	7.55	7.6	4.00	4.0
					5.77		58.80		6.86		7.61		4.00	
MUP-W6 (mobile)	02:10	0.2	29.0	29.0	5.07	5.1	56.80	55.7	11.20	11.1	6.95	7.0	4.00	4.0
					5.13		54.60		11.07		7.02		4.00	

Date 17-Jul-09														
Location	Time	Depth (m)	Temp(oC)		DO (mg/L)		DOS(%)		Turbidity(NTU)		pH		SS	
MUP-W1 (Control) (MUP01/02-W1)	03:05	0.1	33.3	33.3	3.06	3.1	51.90	52.6	17.30	17.9	7.07	7.1	8.00	8.0
					3.18		53.30		18.50		7.17		8.00	
MUP-W2 (Control) (MUP01/02-W2)	02:05	0.3	32.0	32.0	4.37	4.3	61.80	61.0	5.40	5.6	7.69	7.7	<2	2.0
					4.23		60.10		5.88		7.66		<2	
MUP-W3 (Control)	02:40	0.1	33.2	33.2	5.76	5.7	55.90	55.2	8.64	8.8	7.98	7.9	56.00	56.0
					5.71		54.40		8.93		7.86		56.00	
MUP-W4 (Impact)	02:20	0.3	32.5	32.5	6.15	6.1	60.90	60.4	7.62	7.5	7.47	7.4	3.00	3.0
					6.11		59.90		7.37		7.41		3.00	
MUP-W5 (mobile)	02:47	0.4	33.2	33.2	4.68	4.7	56.70	56.4	4.82	4.8	7.68	7.7	2.00	2.0
					4.66		56.10		4.69		7.62		2.00	
MUP-W6 (mobile)	02:30	0.2	33.0	33.0	5.17	5.1	47.40	46.8	4.67	4.8	7.04	7.1	<2	2.0
					5.08		46.20		4.84		7.10		<2	

DSD CONTRACT NO. DC/2007/08  
 Drainage Improvements Works in Tai Po Tin, Ping Che, Man Uk Pin and Lin Ma Hang

Water Quality Monitoring Data for MUP05

Date 20-Jul-09														
Location	Time	Depth (m)	Temp(oC)		DO (mg/L)		DOS(%)		Turbidity(NTU)		pH		SS	
MUP-W1 (Control) (MUP01/02-W1)	03:00	0.2	31.8	31.8	4.55	4.6	56.20	57.9	5.53	5.6	7.26	7.3	5.00	5.0
			31.8		4.73		59.60		5.70		7.41		5.00	
MUP-W2 (Control) (MUP01/02-W2)	01:55	0.4	30.2	30.2	5.16	5.2	66.10	67.7	6.09	6.4	7.77	7.8	3.00	3.0
			30.2		5.33		69.20		6.78		7.81		3.00	
MUP-W3 (Control)	02:35	0.2	33.0	33.0	4.11	4.3	60.80	63.3	67.70	71.9	7.56	7.4	76.00	76.0
			33.0		4.58		65.70		76.00		7.20		76.00	
MUP-W4 (Impact)	02:15	0.4	31.1	31.1	5.42	5.5	65.40	66.8	6.76	6.6	7.08	7.2	<2	2.0
			31.1		5.56		68.10		6.51		7.37		<2	
MUP-W5 (mobile)	02:43	0.5	32.7	32.7	4.67	4.8	62.20	65.0	7.65	7.6	7.37	7.4	<2	2.0
			32.7		4.94		67.80		7.53		7.46		<2	
MUP-W6 (mobile)	02:25	0.2	32.5	32.5	4.85	4.9	51.40	53.1	5.33	5.4	7.24	7.3	<2	2.0
			32.5		4.93		54.80		5.44		7.33		<2	

Date 22-Jul-09														
Location	Time	Depth (m)	Temp(oC)		DO (mg/L)		DOS(%)		Turbidity(NTU)		pH		SS	
MUP-W1 (Control) (MUP01/02-W1)	02:40	0.1	31.5	31.5	3.56	3.6	49.90	51.1	6.57	6.7	7.39	7.5	4.00	4.0
					3.73		52.30		6.78		7.58		4.00	
MUP-W2 (Control) (MUP01/02-W2)	01:35	0.3	32.5	32.5	4.02	4.4	60.80	63.3	4.71	4.7	7.45	7.5	2.00	2.0
					4.68		65.70		4.66		7.55		2.00	
MUP-W3 (Control)	02:10	0.2	31.7	31.7	5.02	5.2	62.30	64.1	18.90	19.1	7.59	7.5	38.00	38.0
					5.31		65.80		19.30		7.47		38.00	
MUP-W4 (Impact)	01:55	0.3	32.6	32.6	5.99	5.8	57.70	57.0	6.99	7.0	7.25	7.3	4.00	4.0
					5.66		56.20		7.05		7.38		4.00	
MUP-W5 (mobile)	02:17	0.3	30.6	30.6	5.02	5.0	49.40	49.0	3.20	4.2	7.42	7.3	4.00	4.0
					4.93		48.50		5.11		7.25		4.00	
MUP-W6 (mobile)	02:03	0.2	32.5	32.5	4.88	4.8	47.60	48.3	4.10	4.8	7.21	7.3	4.00	4.0
					4.79		48.90		5.56		7.29		4.00	




Date 24-Jul-09														
Location	Time	Depth (m)	Temp(oC)		DO (mg/L)		DOS(%)		Turbidity(NTU)		pH		SS	
MUP-W1 (Control) (MUP01/02-W1)	11:00	0.1	28.0	28.0	3.16	3.2	43.30	44.5	16.60	17.2	7.03	7.0	18.00	18.0
					3.18		45.60		17.80		7.06		18.00	
MUP-W2 (Control) (MUP01/02-W2)	09:55	0.3	29.5	29.5	4.04	4.1	52.80	54.6	13.70	14.3	7.55	7.6	2.00	2.0
					4.16		56.30		14.80		7.60		2.00	
MUP-W3 (Control)	02:10	0.2	31.7	31.7	5.02	5.2	62.30	64.1	18.90	19.1	7.59	7.5	42.00	42.0
					5.31		65.80		19.30		7.47		42.00	
MUP-W4 (Impact)	01:55	0.3	32.6	32.6	5.99	5.8	57.70	57.0	6.99	7.0	7.25	7.3	<2	2.0
					5.66		56.20		7.05		7.38		<2	
MUP-W5 (mobile)	02:17	0.3	30.6	30.6	5.02	5.0	49.40	49.0	3.20	4.2	7.42	7.3	2.00	2.0
					4.93		48.50		5.11		7.25		2.00	
MUP-W6 (mobile)	02:03	0.2	32.5	32.5	4.88	4.8	47.60	48.3	4.10	4.8	7.21	7.3	3.00	3.0
					4.79		48.90		5.56		7.29		3.00	


## **Appendix I**

### **Graphic Plot of Monitoring**




- 1. Construction Noise**
- 2. Air Quality**
- 3. Water Quality**

## Graphic Plot of Monitoring - Construction Noise

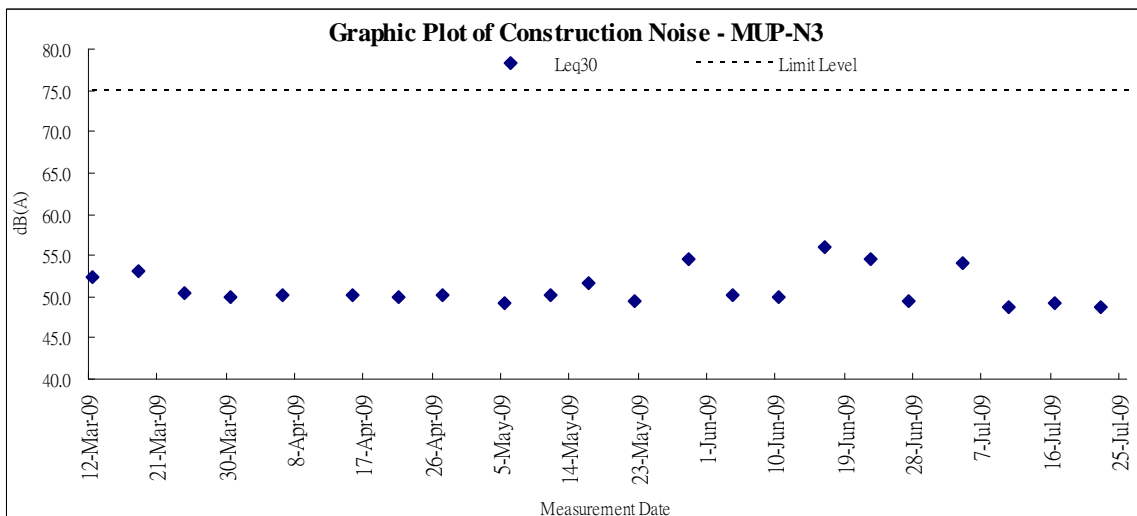
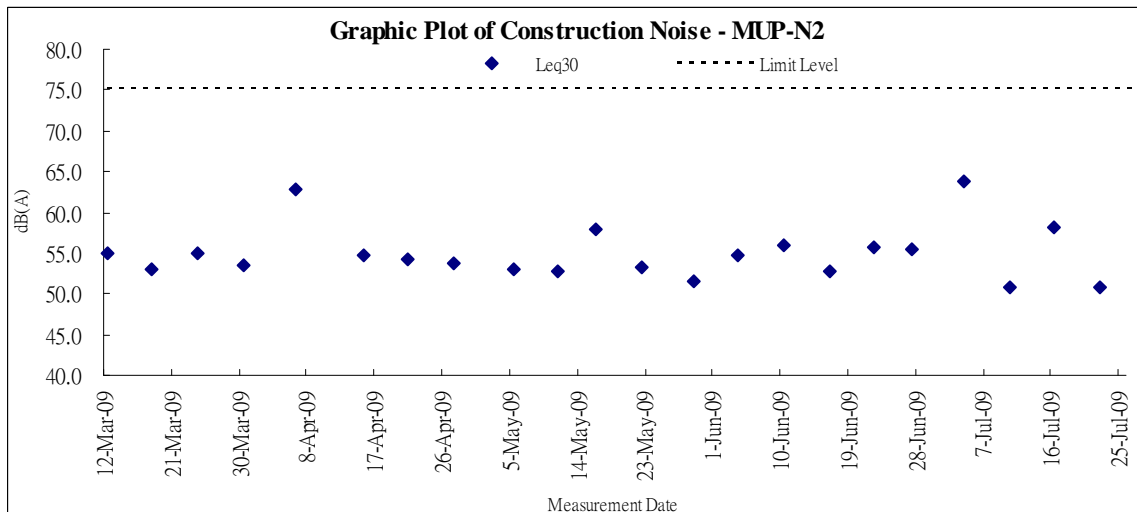
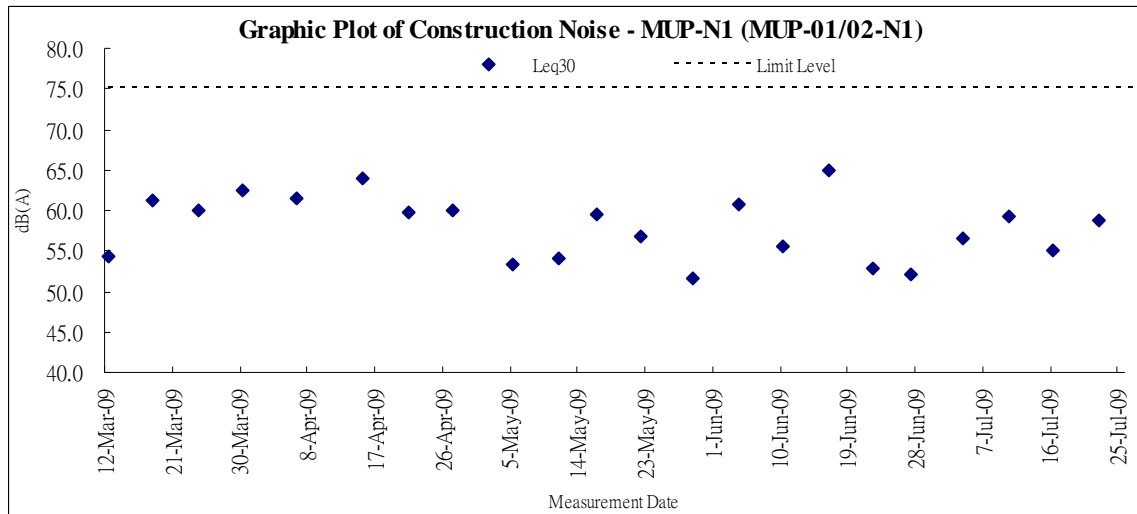


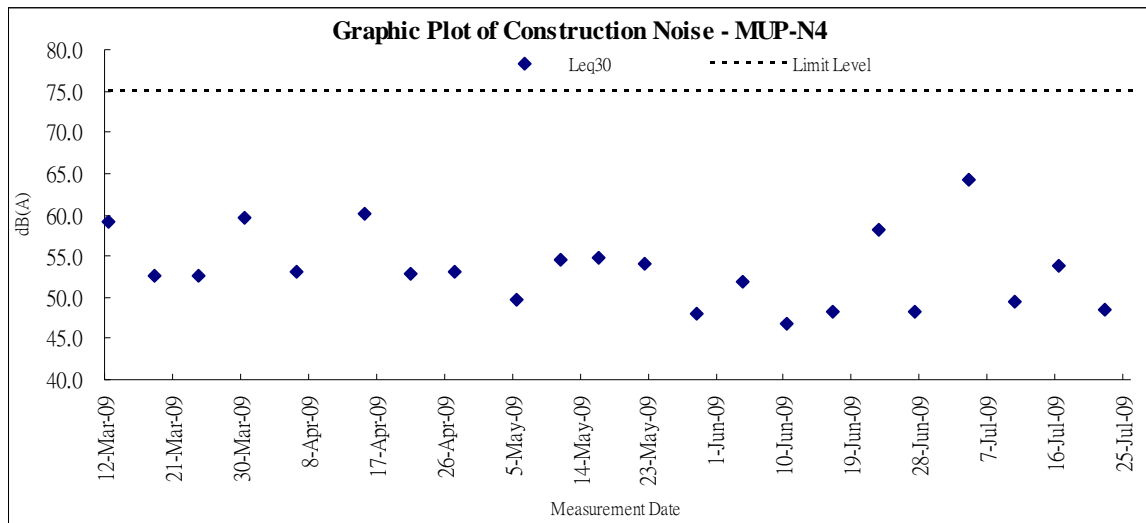

## Graphic Plot of Monitoring - Air Quality GRAPHIC PLOT – 24-hour TSP

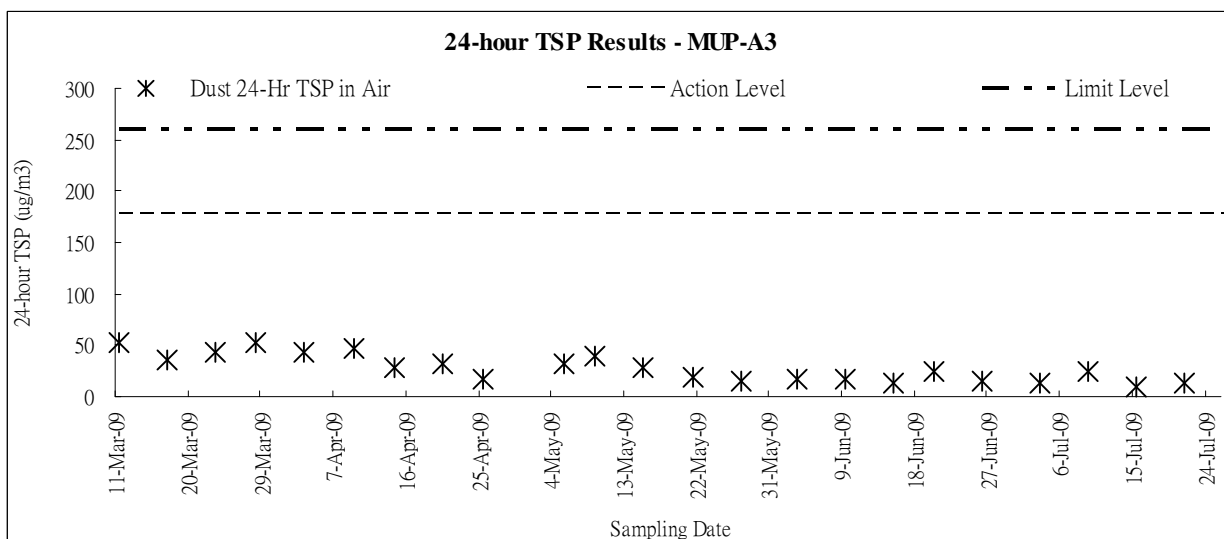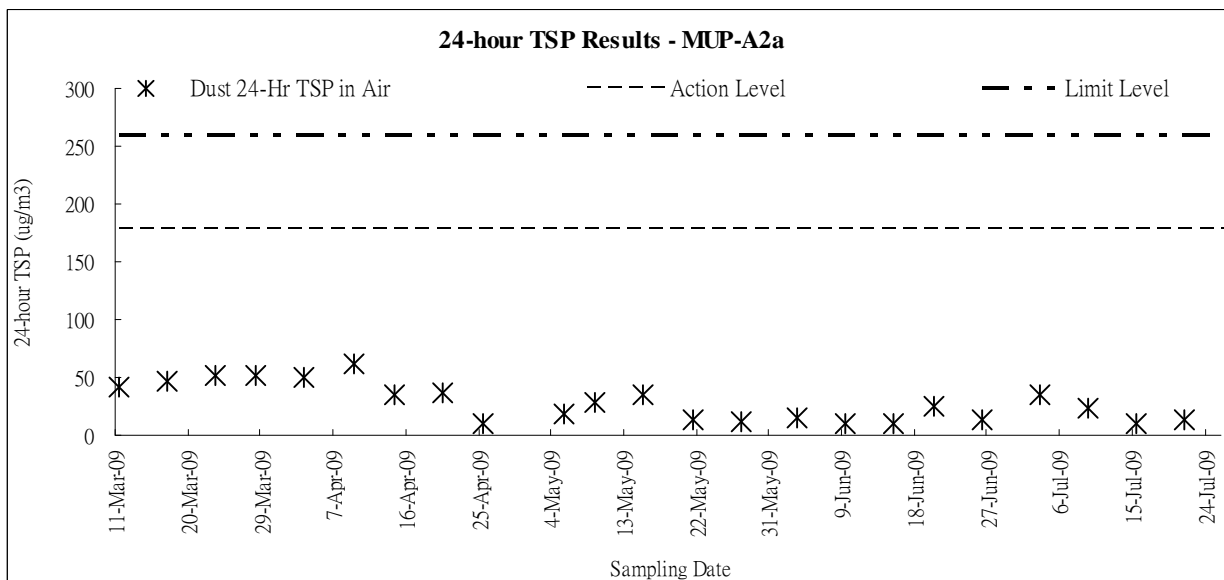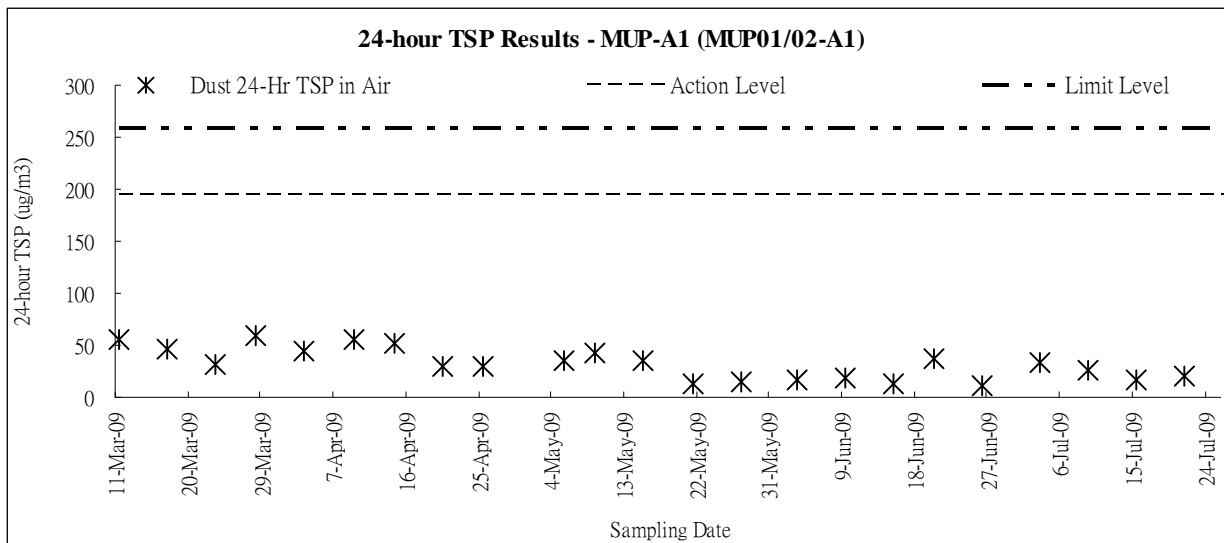



### GRAPHIC PLOT – 1-hour TSP

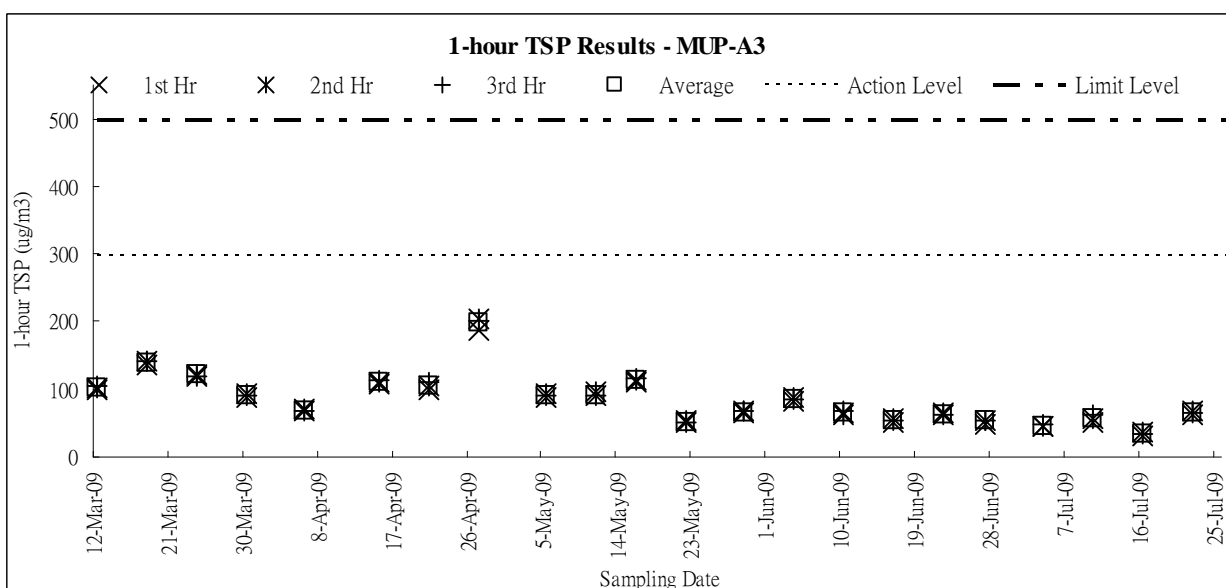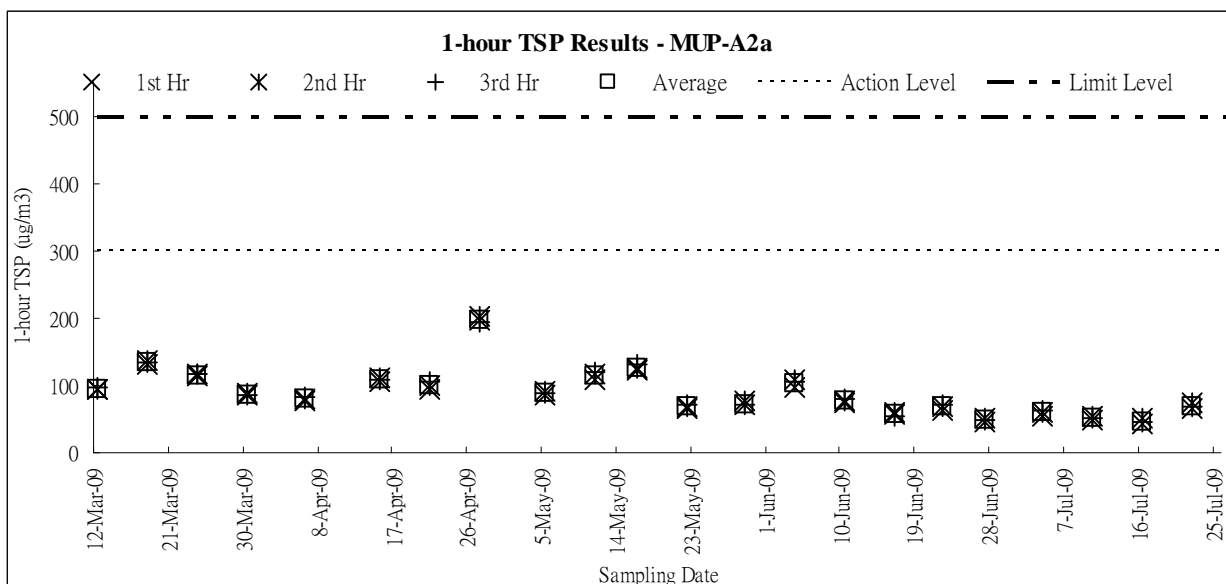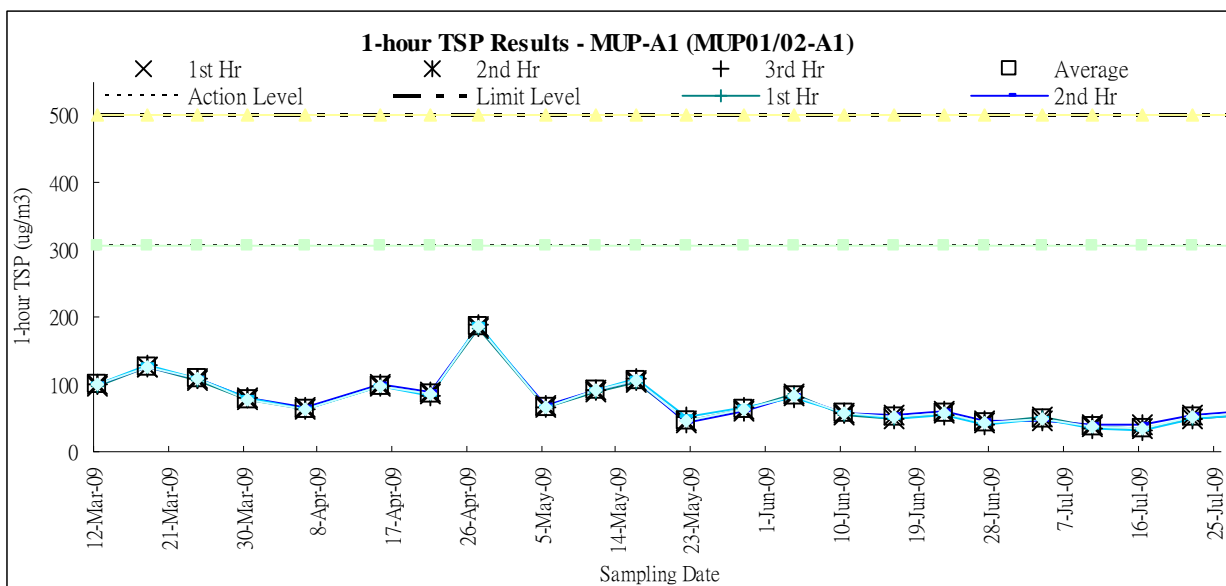



## Graphic Plot of Monitoring - Water Quality

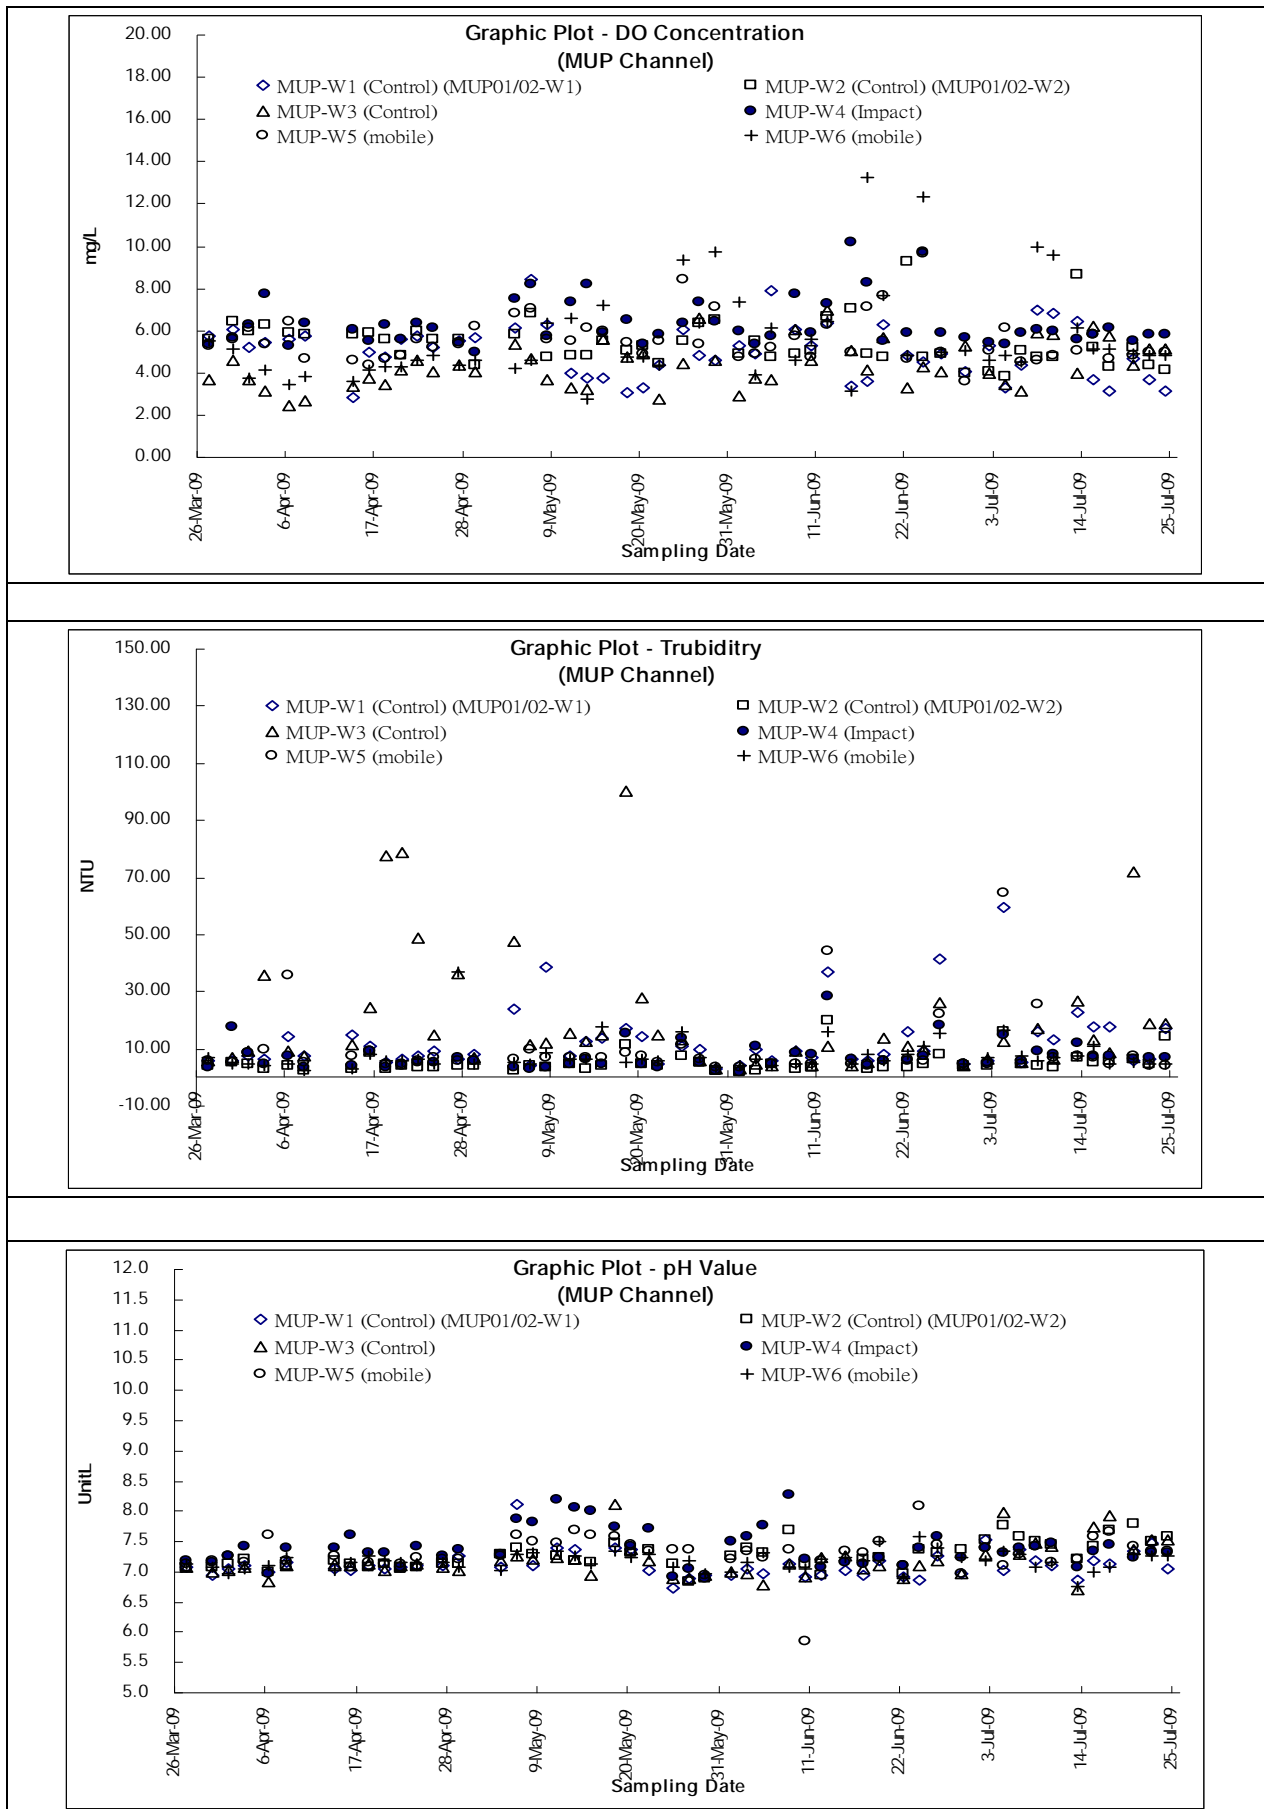

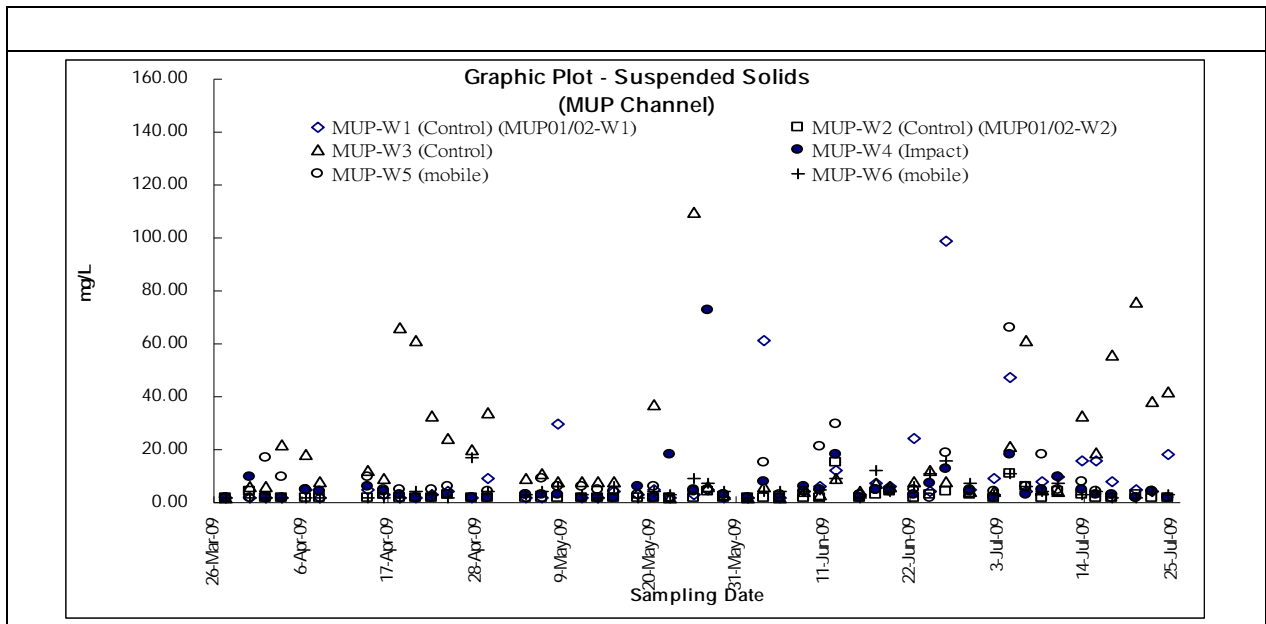

## **Appendix J**

### **Meteorological Records**

**Meteorological Data in this Reporting Month**

Date		Weather	Total Rainfall (mm)	Ta Kwu ling			
				Mean Air Temp. (°C)	Wind Speed (km/h)	Mean Relative Humidity (%)	Wind Direction
26-Jun-09	Fri	cloudy/squally showers/moderate/fresh/strong	17.7	28.4	9.7	81.5	E/SE
27-Jun-09	Sat	cloudy/rain/fresh/strong	46.9	26.4	13.5	82.5	E/NE
28-Jun-09	Sun	cloudy/showers/squally thumderstorm/moderate	48.7	26.7	6.5	88.2	S/SE
29-Jun-09	Mon	a few showers/sunny periods/cloudy/moderate/fresh	Trace	28.7	9.5	79	S/SW
30-Jun-09	Tue	hot/sunny periods/isolated showers/moderate/fresh	0.1	29.5	10	77.5	S/SW
1-Jul-09	Wed	Holiday					
2-Jul-09	Thu	hot/sunny periods/moderate/fresh	Trace	29.8	7.5	72.2	S/SW
3-Jul-09	Fri	cloudy/a few showers/sunny intervals/moderate/fresh	0.5	29.8	8.2	69.5	S/SW
4-Jul-09	Sat	cloudy/showers/squally thunderstorm/moderate/fresh	17.4	26.3	8.2	76.5	S/SW
5-Jul-09	Sun	cloudy/scattered showers/squally thunderstorm/moderate	49.6	26.2	7	83.5	E/SE
6-Jul-09	Mon	fine/isolated showers/moderate	31.2	27.8	10	85.5	E/SE
7-Jul-09	Tue	fine/hot/isolated showers/light winds	20.1	29.6	7.2	78	E/SE
8-Jul-09	Wed	fine/hot/light winds	0	29.2	6.7	75.5	W/SW
9-Jul-09	Thu	fine/very hot/lihght winds	0	29	6.2	73	W/SW
10-Jul-09	Fri	fine/vey hot/moderate	Trace	30.4	5.5	71	W/SW
11-Jul-09	Sat	cloudy/squally showers/fresh/strong	8.1	29.4	10.2	65.5	E/NE
12-Jul-09	Sun	fine/moderate	Trace	29.9	8.5	75.5	E/SE
13-Jul-09	Mon	fine/hot/light winds	0	28.9	3.2	75.5	N/NW
14-Jul-09	Tue	fine/ery hot/isolated showers/moderate	0	28.5	6.5	75.5	S/SE
15-Jul-09	Wed	cloudy/a few showers/sunny periods/moderate	4.8	29	8.2	78.5	E
16-Jul-09	Thu	fine/very hot/isolated showers/moderate/fresh	0.8	29.6	12.5	77.5	E/SE
17-Jul-09	Fri	fine/very hot/lihght winds	0.4	33.3	10.2	74	E/SE
18-Jul-09	Sat	very hot/hazy/squally showers/moderate	11.7	30.6	6	74.5	W/SW
19-Jul-09	Sun	sunny periods/islated showers/moderate/fresh	124.6	26.3	11.5	85.5	E/SE
20-Jul-09	Mon	sunny periods/isolated showes/moderate/fresh	8.1	28.8	9	82	S/SE
21-Jul-09	Tue	fine/hot/moderate	0.6	29.5	9	77.7	E/SE
22-Jul-09	Wed	a few showers/sunny periods/moderate	0	28.7	7.2	78	E/SE
23-Jul-09	Thu	a few showers/sunny periods/hot/moderate	0.6	29.3	7	81	E/SE
24-Jul-09	Fri	hot/a few showers/moderate/fresh/sunny periods	2.6	28.5	8.2	79.5	S/SW
25-Jul-09	Sat	hot/sunny periods/a few showers/moderate/fresh	8.3	29.2	7	83	S/SW

\* The record was extracted from The Hong Kong Observatory Weather Stations

## **Appendix K**

### **Proforma of the Weekly ET Site Inspection Checklist**

<b>Project:</b> <u>DSD Contract No. DC/2007/08</u> <u>Drainage Improvement Works at Tai Po Tin, Ping Che, Man Uk Pin and Lin Ma Hang</u>	<b>Inspected by</b> IEC/IEC's Representative: _____ SRE/SRE's Representative: <u>William Tang</u> ETL/ ET's Representative: <u>Carson Chan</u> EO/EO's Representative: <u>C.P Chan</u> Contractor's Representative: <u>L. Lam</u>	<b>Checklist No.</b> <u>DC200708-300609</u>
<b>Inspection</b> <b>Date:</b> <u>30 June 2009</u> <b>Time:</b> <u>10:00</u>		

<b>PART A:</b>	<b>GENERAL INFORMATION</b>	<b>Environmental Permit No.</b>
Weather:	<input checked="" type="checkbox"/> Sunny <input type="checkbox"/> Fine <input type="checkbox"/> Cloudy <input type="checkbox"/> Rainy <input type="checkbox"/> Calm	<input type="checkbox"/>
Temperature:	<u>30</u> °C	<input type="checkbox"/>
Humidity:	<input type="checkbox"/> High <input checked="" type="checkbox"/> Moderate <input type="checkbox"/> Low	<input type="checkbox"/> N/A
Wind:	<input type="checkbox"/> Strong <input type="checkbox"/> Breeze <input type="checkbox"/> Light <input checked="" type="checkbox"/> Calm	
<b>Channel</b>	<b>Area Inspected</b>	
TKL02 TKL07 MUP01/02		

**PART B: SITE AUDIT**

Note: <b>Not Obs.:</b> Not Observed; <b>Yes:</b> Compliance; <b>No:</b> Non-Compliance; <b>Follow Up:</b> Observations requiring follow-up actions <b>N/A:</b> Not Applicable	Not Obs.	Yes	No	Follow Up	N/A	Photo/Remarks
<b>Section 1: Water Quality</b>						
1.01 Is an effluent discharge license obtained for the Project?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.02 Is the effluent discharged in accordance with the discharge licence?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.03 Is the discharge of turbid water avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.04 Are there proper desilting facilities in the drainage systems to reduce SS levels in effluent?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Remarks 1 & 2
1.05 Are there channels, sandbags or bunds to direct surface run-off to sedimentation tanks?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.06 Are there any perimeter channels provided at site boundaries to intercept storm runoff from crossing the site?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.07 Is drainage system well maintained?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.08 As excavation proceeds, are temporary access roads protected by crushed stone or gravel?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.09 Are temporary exposed slopes properly covered?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.10 Are earthworks final surfaces well compacted or protected?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.11 Are manholes adequately covered or temporarily sealed?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.12 Are there any procedures and equipment for rainstorm protection?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.13 Are wheel washing facilities well maintained?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.14 Is runoff from wheel washing facilities avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.15 Are there toilets provided on site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.16 Are toilets properly maintained?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.17 Are the vehicle and plant servicing areas paved and located within roofed areas?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.18 Is the oil leakage or spillage avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.19 Are there any measures to prevent leaked oil from entering the drainage system?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.20 Are there any measures to collect spilt cement and concrete washings during concreting works?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

<b>Note:</b>	<b>Not Obs.:</b> Not Observed; <b>Yes:</b> Compliance; <b>No:</b> Non-Compliance; <b>Follow Up:</b> Observations requiring follow-Up actions <b>N/A:</b> Not Applicable	<b>Not Obs.</b>	<b>Yes</b>	<b>No</b>	<b>Follow Up</b>	<b>N/A</b>	<b>Photo/Remarks</b>
1.21	Are there any oil interceptors/grease traps in the drainage systems for vehicle and plant servicing areas, canteen kitchen, etc?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.22	Are the oil interceptors/grease traps maintained properly?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.23	Is used bentonite recycled where appropriate?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.24	Designated settlement area for runoff/wheel wash waste is provide and located at the streambed with 1-2m deep, 12m long and around 50m3 capacities for sedimentation.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.25	No excavation is undertaken in the settlement area.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.26	Concreting wastes water should be neutralized below the pH Action Levels before discharge.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.27	Mobile toilets should provide on site and located away the stream course.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.25	License collector should be employed for handling the sewage of mobile toilet.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
<b>Section 2: Air Quality</b>							
2.01	Are there wheel washing facilities with high pressure jets provided at every vehicle exit point?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.02	Are vehicles washed to remove any dusty materials from their bodies and wheels before leaving construction sites?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.03	Are the excavated materials sprayed with water during handling?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.04	Are stockpiles of dusty materials sprayed with water, covered or placed in sheltered areas?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.05	Is the exposed earth properly treated within six months after the last construction activities?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.06	Are the access roads sprayed with water to maintain the entire road surface wet or paved?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.07	Is the surface where any drilling, cutting, polishing or breaking operation continuously sprayed with water?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.08	Is the load on vehicles covered entirely by clean impervious sheeting?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.09	Is the loading of materials to a level higher than the side and tail boards during transportation by vehicles avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.10	Is the road leading to the construction site within 30m of the vehicle entrance kept clear of dusty materials?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.11	Is dark smoke emission from plant/equipment avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.12	Are de-bagging, batching and mixing processes carried out in sheltered areas during the use of bagged cement?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.13	Are site vehicles travelling within the speed limit not more than 15km/hour?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.14	Are hoardings of not less than 2.4m high provided along the site boundary, which adjoins areas accessible to the public?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.15	Is open burning avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.16	Excavated materials from the stream must remove form site on the same day. The materials shall be stored in covered impermeable skips awaiting removal from site.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
<b>Section 3: Noise</b>							
3.01	Are noisy equipment and activities positioned as far as practicable from the sensitive receivers?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.02	Is silenced equipment adopted?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.03	Is idle equipment turned off or throttled down?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.04	Are all plant and equipment well maintained and in good condition?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.05	Are noise barriers or enclosures provided at areas where construction activities cause noise impact on sensitive receivers?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.06	Are hand held breakers fitted with valid noise emission labels during operation?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.07	Are air compressors fitted with valid noise emission labels during operation?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

Note:	Not Obs.: Not Observed; Yes: Compliance; No: Non-Compliance; Follow Up: Observations requiring follow-Up actions N/A: Not Applicable	Not Obs.	Yes	No	Follow Up	N/A	Photo/Remarks
3.08	Are flaps and panels of mechanical equipment closed during operation?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.09	Are Construction Noise Permit(s) applied for percussive piling works?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.10	Are Construction Noise Permit(s) applied for general construction works during restricted hours?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.11	Are valid Construction Noise Permit(s) posted at site entrances?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.12	Use of quiet plant had been used on site to minimise the construction noise impact to the surrounding residences/dwellings (Level 1 mitigation measures).	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.13	Temporary/Moveable noise barrier or site hoarding are provide or erect at the site boundary to minimise the noise impact of the closest NSRs or stationary equipments shield by the noise barrier which cannot visible from NSRs (Level 2 mitigation measure)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.14	Temporary/Moveable noise barrier equal to or more than 3m height with 10kg/m2 are provide for noise mitigation measures (Level 2 mitigation measures).	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
<b>Section 4: Waste/Chemical Management</b>							
4.01	Waste Management Plan had been submit to Engineer for approval.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.02	Are receptacles available for general refuse collection?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.03	Is general refuse sorting or recycling implemented?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.04	Is general refuse disposed of properly and regularly?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.05	Is the Contractor registered as a chemical waste producer?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.06	Are the chemical waste containers properly labelled?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.07	Are the chemical wastes stored in proper storage areas?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.08	Is the chemical waste storage area properly labelled?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.09	Is the chemical waste storage area used for storage of chemical waste only?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.10	Are incompatible chemical wastes stored in different areas?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.11	Are the chemical wastes disposed of by licensed collectors?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.12	Are trip tickets for chemical wastes disposal available for inspection?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.13	Are chemical/fuel storage areas bunded?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.14	Are designated areas identified for storage and sorting of construction wastes?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.15	Are construction wastes sorted (inert and non-inert) on site?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.16	Are construction wastes reused?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.17	Are construction wastes disposed of properly?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.18	Are site hoardings and signboards made of durable materials instead of timber?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.19	Is trip ticket system implemented for the disposal of construction wastes and records available for inspection?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.20	Are appropriate procedures followed if contaminated material exists?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.21	Is relevant license/ permit for disposal of construction waste or excavated materials available for inspection?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.22	Site cleanliness and appropriate waste management training had provided for the site workers.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.23	Contaminated sediments will managed according to WBTC No.12/2000 and EWTB TC(W) No. 34/2002.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	



<b>Note:</b> Not Obs.: Not Observed; Yes: Compliance; No: Non-Compliance; Follow Up: Observations requiring follow-Up actions N/A: Not Applicable	Not Obs.	Yes	No	Follow Up	N/A	Photo/ Remarks
<b>Section 5: Landscape &amp; Visual</b>						
5.01 Are retained and transplanted trees in health condition?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____
5.02 Are retained and transplanted trees properly protected?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____
5.03 Are surgery works carried out for the damaged trees?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____
5.04 Is damage to trees outside site boundary due to construction activities avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____
5.05 Is the night-time lighting controlled to minimize glare to sensitive receivers?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____
<b>Section 6: Ecology</b>						
6.01 Gabion banks and base had been provide for channel linings and banks for typical sections?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____
6.02 Prevent site effluent/runoff discharge to the seasonal wetlands?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____
6.03 Stockpiling or disposal of materials, and any dredging or construction activities at the seasonal wetlands are prohibited?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____
<b>Section 7: Others</b>						
7.01 Are relevant Environmental Permits posted at all vehicle site entrances/exits?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____

**Remarks**

**Follow-Up of Last Site Inspection (23 June 2009):**



C&D removed and channel diverted at TKL02.

**Finding of Site Inspection on 30 June 2009:**



1. Sludge observed at TKL02. The contractor is advised to implement certain mitigation measures such as installing desilting facilities



2. Muddy water observed at TKL07. The contractor is reminded to prevent any direct discharge of muddy water



3. Stagnant water is observed at MUP01. The contractor is reminded to remove any stagnant water on site to eliminate mosquito breeding.

**IEC's representative**

**SRE's representative**

**ET's representative**

**EO's representative**

**Contractor's representative**

*Carson*

( )

( )

( Carson Chan )

( )

( )

<b>Project:</b> <u>DSD Contract No. DC/2007/08</u> <u>Drainage Improvement Works at Tai Po Tin, Ping Che, Man Uk Pin and Lin Ma Hang</u>	<b>Inspected by</b> IEC/IEC's Representative: _____ SRE/SRE's Representative: <u>William Tang</u> ETL/ ET's Representative: <u>Carson Chan</u> EO/EO's Representative: <u>C.P Chan</u> Contractor's Representative: <u>S. J. Yu</u>	<b>Checklist No.</b> <u>DC200708-070709</u>
<b>Inspection</b> <b>Date:</b> <u>7 July 2009</u> <b>Time:</b> <u>10:00</u>		

<b>PART A:</b>	<b>GENERAL INFORMATION</b>	<b>Environmental Permit No.</b>
Weather:	<input checked="" type="checkbox"/> Sunny <input type="checkbox"/> Fine <input type="checkbox"/> Cloudy <input type="checkbox"/> Rainy <input type="checkbox"/> Calm	<input type="checkbox"/>
Temperature:	<u>31</u> °C	<input type="checkbox"/>
Humidity:	<input type="checkbox"/> High <input checked="" type="checkbox"/> Moderate <input type="checkbox"/> Low	<input type="checkbox"/> N/A
Wind:	<input type="checkbox"/> Strong <input type="checkbox"/> Breeze <input type="checkbox"/> Light <input checked="" type="checkbox"/> Calm	
<b>Channel</b>	<b>Area Inspected</b>	
TKL02 TKL07 MUP01/02		

**PART B: SITE AUDIT**

Note: <b>Not Obs.:</b> Not Observed; <b>Yes:</b> Compliance; <b>No:</b> Non-Compliance; <b>Follow Up:</b> Observations requiring follow-up actions <b>N/A:</b> Not Applicable	Not Obs.	Yes	No	Follow Up	N/A	Photo/Remarks
<b>Section 1: Water Quality</b>						
1.01 Is an effluent discharge license obtained for the Project?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.02 Is the effluent discharged in accordance with the discharge licence?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.03 Is the discharge of turbid water avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.04 Are there proper desilting facilities in the drainage systems to reduce SS levels in effluent?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Remark 1
1.05 Are there channels, sandbags or bunds to direct surface run-off to sedimentation tanks?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Remark 4
1.06 Are there any perimeter channels provided at site boundaries to intercept storm runoff from crossing the site?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.07 Is drainage system well maintained?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.08 As excavation proceeds, are temporary access roads protected by crushed stone or gravel?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.09 Are temporary exposed slopes properly covered?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.10 Are earthworks final surfaces well compacted or protected?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.11 Are manholes adequately covered or temporarily sealed?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.12 Are there any procedures and equipment for rainstorm protection?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.13 Are wheel washing facilities well maintained?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.14 Is runoff from wheel washing facilities avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.15 Are there toilets provided on site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.16 Are toilets properly maintained?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.17 Are the vehicle and plant servicing areas paved and located within roofed areas?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.18 Is the oil leakage or spillage avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.19 Are there any measures to prevent leaked oil from entering the drainage system?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.20 Are there any measures to collect spilt cement and concrete washings during concreting works?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

Note:	Not Obs.: Not Observed; Yes: Compliance; No: Non-Compliance; Follow Up: Observations requiring follow-Up actions N/A: Not Applicable	Not Obs.	Yes	No	Follow Up	N/A	Photo/Remarks
1.21	Are there any oil interceptors/grease traps in the drainage systems for vehicle and plant servicing areas, canteen kitchen, etc?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.22	Are the oil interceptors/grease traps maintained properly?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.23	Is used bentonite recycled where appropriate?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.24	Designated settlement area for runoff/wheel wash waste is provide and located at the streambed with 1-2m deep, 12m long and around 50m3 capacities for sedimentation.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.25	No excavation is undertaken in the settlement area.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.26	Concreting wastes water should be neutralized below the pH Action Levels before discharge.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.27	Mobile toilets should provide on site and located away the stream course.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.25	License collector should be employed for handling the sewage of mobile toilet.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
<b>Section 2: Air Quality</b>							
2.01	Are there wheel washing facilities with high pressure jets provided at every vehicle exit point?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.02	Are vehicles washed to remove any dusty materials from their bodies and wheels before leaving construction sites?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.03	Are the excavated materials sprayed with water during handling?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.04	Are stockpiles of dusty materials sprayed with water, covered or placed in sheltered areas?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.05	Is the exposed earth properly treated within six months after the last construction activities?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.06	Are the access roads sprayed with water to maintain the entire road surface wet or paved?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.07	Is the surface where any drilling, cutting, polishing or breaking operation continuously sprayed with water?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.08	Is the load on vehicles covered entirely by clean impervious sheeting?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.09	Is the loading of materials to a level higher than the side and tail boards during transportation by vehicles avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.10	Is the road leading to the construction site within 30m of the vehicle entrance kept clear of dusty materials?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.11	Is dark smoke emission from plant/equipment avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.12	Are de-bagging, batching and mixing processes carried out in sheltered areas during the use of bagged cement?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.13	Are site vehicles travelling within the speed limit not more than 15km/hour?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.14	Are hoardings of not less than 2.4m high provided along the site boundary, which adjoins areas accessible to the public?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.15	Is open burning avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.16	Excavated materials from the stream must remove form site on the same day. The materials shall be stored in covered impermeable skips awaiting removal from site.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
<b>Section 3: Noise</b>							
3.01	Are noisy equipment and activities positioned as far as practicable from the sensitive receivers?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.02	Is silenced equipment adopted?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.03	Is idle equipment turned off or throttled down?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.04	Are all plant and equipment well maintained and in good condition?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.05	Are noise barriers or enclosures provided at areas where construction activities cause noise impact on sensitive receivers?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.06	Are hand held breakers fitted with valid noise emission labels during operation?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.07	Are air compressors fitted with valid noise emission labels during operation?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

Note:	Not Obs.: Not Observed; Yes: Compliance; No: Non-Compliance; Follow Up: Observations requiring follow-Up actions N/A: Not Applicable	Not Obs.	Yes	No	Follow Up	N/A	Photo/Remarks
3.08	Are flaps and panels of mechanical equipment closed during operation?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.09	Are Construction Noise Permit(s) applied for percussive piling works?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.10	Are Construction Noise Permit(s) applied for general construction works during restricted hours?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.11	Are valid Construction Noise Permit(s) posted at site entrances?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.12	Use of quiet plant had been used on site to minimise the construction noise impact to the surrounding residences/dwellings (Level 1 mitigation measures).	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.13	Temporary/Moveable noise barrier or site hoarding are provide or erect at the site boundary to minimise the noise impact of the closest NSRs or stationary equipments shield by the noise barrier which cannot visible from NSRs (Level 2 mitigation measure)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.14	Temporary/Moveable noise barrier equal to or more than 3m height with 10kg/m2 are provide for noise mitigation measures (Level 2 mitigation measures).	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
<b>Section 4: Waste/Chemical Management</b>							
4.01	Waste Management Plan had been submit to Engineer for approval.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.02	Are receptacles available for general refuse collection?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.03	Is general refuse sorting or recycling implemented?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.04	Is general refuse disposed of properly and regularly?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.05	Is the Contractor registered as a chemical waste producer?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.06	Are the chemical waste containers properly labelled?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.07	Are the chemical wastes stored in proper storage areas?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.08	Is the chemical waste storage area properly labelled?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.09	Is the chemical waste storage area used for storage of chemical waste only?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.10	Are incompatible chemical wastes stored in different areas?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.11	Are the chemical wastes disposed of by licensed collectors?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.12	Are trip tickets for chemical wastes disposal available for inspection?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.13	Are chemical/fuel storage areas bunded?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.14	Are designated areas identified for storage and sorting of construction wastes?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.15	Are construction wastes sorted (inert and non-inert) on site?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.16	Are construction wastes reused?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.17	Are construction wastes disposed of properly?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.18	Are site hoardings and signboards made of durable materials instead of timber?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.19	Is trip ticket system implemented for the disposal of construction wastes and records available for inspection?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.20	Are appropriate procedures followed if contaminated material exists?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.21	Is relevant license/ permit for disposal of construction waste or excavated materials available for inspection?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.22	Site cleanliness and appropriate waste management training had provided for the site workers.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.23	Contaminated sediments will managed according to WBTC No.12/2000 and EWTB TC(W) No. 34/2002.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

<b>Note:</b> Not Obs.: Not Observed; Yes: Compliance; No: Non-Compliance; Follow Up: Observations requiring follow-Up actions N/A: Not Applicable		Not Obs.	Yes	No	Follow Up	N/A	Photo/Remarks
<b>Section 5: Landscape &amp; Visual</b>							
5.01	Are retained and transplanted trees in health condition?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
5.02	Are retained and transplanted trees properly protected?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
5.03	Are surgery works carried out for the damaged trees?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
5.04	Is damage to trees outside site boundary due to construction activities avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
5.05	Is the night-time lighting controlled to minimize glare to sensitive receivers?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
<b>Section 6: Ecology</b>							
6.01	Gabion banks and base had been provide for channel linings and banks for typical sections?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
6.02	Prevent site effluent/runoff discharge to the seasonal wetlands?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
6.03	Stockpiling or disposal of materials, and any dredging or construction activities at the seasonal wetlands are prohibited?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
<b>Section 7: Others</b>							
7.01	Are relevant Environmental Permits posted at all vehicle site entrances/exits?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

**Remarks**

**Follow-Up of Last Site Inspection (30 June 2009):**



Desilting facilities implemented at TKL02.



Muddy water was desilted prior discharge at TKL07.

**Finding of Site Inspection on 7 July 2009:**



1. Muddy water to be treated before discharge at **TKL02**. The contractor is advised to remove the muddy water, and implement certain mitigation measures.



2. Stagnant water observed at **TKL07**. The contractor is reminded to prevent any accumulation of stagnant water



3. Stagnant water is observed at MUP01. The contractor is reminded to remove any stagnant water on site to eliminate mosquito breeding.



4. Muddy water is observed at MUP01. The contractor is reminded to implement relative mitigation measures, such as placing sand bags, and desilting facilities before discharge

*IEC's representative*

*SRE's representative*

*ET's representative*

*EO's representative*

*Contractor's representative*

( )

( )

( Carson Chan )

( )

( )

<b>Project:</b> <u>DSD Contract No. DC/2007/08</u> <u>Drainage Improvement Works at Tai Po Tin, Ping Che, Man Uk Pin and Lin Ma Hang</u>	<b>Inspected by</b> <b>IEC/IEC's Representative:</b> Edmund Cheung <b>SRE/SRE's Representative:</b> William Tang <b>ETL/ ET's Representative:</b> Carson Chan <b>EO/EO's Representative:</b> C.P Chan <b>Contractor's Representative:</b> S. J. Yu	<b>Checklist No.</b> <u>DC200708-140709</u>
<b>Inspection Date:</b> <u>14 July 2009</u> <b>Time:</b> <u>10:00</u>		

<b>PART A:</b>	<b>GENERAL INFORMATION</b>	<b>Environmental Permit No.</b>
Weather:	<input checked="" type="checkbox"/> Sunny <input type="checkbox"/> Fine <input type="checkbox"/> Cloudy <input type="checkbox"/> Rainy <input type="checkbox"/> Calm	<input type="checkbox"/>
Temperature:	<input type="text" value="28.5"/> °C	<input type="checkbox"/>
Humidity:	<input type="checkbox"/> High <input checked="" type="checkbox"/> Moderate <input type="checkbox"/> Low	<input type="checkbox"/> N/A
Wind:	<input type="checkbox"/> Strong <input type="checkbox"/> Breeze <input type="checkbox"/> Light <input checked="" type="checkbox"/> Calm	
<b>Channel</b>	<b>Area Inspected</b>	
TKL02 TKL07 MUP01/02		

**PART B: SITE AUDIT**

Note: <b>Not Obs.:</b> Not Observed; <b>Yes:</b> Compliance; <b>No:</b> Non-Compliance; <b>Follow Up:</b> Observations requiring follow-up actions <b>N/A:</b> Not Applicable	Not Obs.	Yes	No	Follow Up	N/A	Photo/Remarks
<b>Section 1: Water Quality</b>						
1.01 Is an effluent discharge license obtained for the Project?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.02 Is the effluent discharged in accordance with the discharge licence?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.03 Is the discharge of turbid water avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.04 Are there proper desilting facilities in the drainage systems to reduce SS levels in effluent?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Photo C
1.05 Are there channels, sandbags or bunds to direct surface run-off to sedimentation tanks?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.06 Are there any perimeter channels provided at site boundaries to intercept storm runoff from crossing the site?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.07 Is drainage system well maintained?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.08 As excavation proceeds, are temporary access roads protected by crushed stone or gravel?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.09 Are temporary exposed slopes properly covered?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.10 Are earthworks final surfaces well compacted or protected?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.11 Are manholes adequately covered or temporarily sealed?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.12 Are there any procedures and equipment for rainstorm protection?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.13 Are wheel washing facilities well maintained?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.14 Is runoff from wheel washing facilities avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.15 Are there toilets provided on site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.16 Are toilets properly maintained?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.17 Are the vehicle and plant servicing areas paved and located within roofed areas?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.18 Is the oil leakage or spillage avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.19 Are there any measures to prevent leaked oil from entering the drainage system?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.20 Are there any measures to collect spilt cement and concrete washings during concreting works?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	



<b>Note:</b>	<b>Not Obs.:</b> Not Observed; <b>Yes:</b> Compliance; <b>No:</b> Non-Compliance; <b>Follow Up:</b> Observations requiring follow-Up actions <b>N/A:</b> Not Applicable	<b>Not Obs.</b>	<b>Yes</b>	<b>No</b>	<b>Follow Up</b>	<b>N/A</b>	<b>Photo/Remarks</b>
1.21	Are there any oil interceptors/grease traps in the drainage systems for vehicle and plant servicing areas, canteen kitchen, etc?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.22	Are the oil interceptors/grease traps maintained properly?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.23	Is used bentonite recycled where appropriate?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.24	Designated settlement area for runoff/wheel wash waste is provide and located at the streambed with 1-2m deep, 12m long and around 50m3 capacities for sedimentation.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.25	No excavation is undertaken in the settlement area.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.26	Concreting wastes water should be neutralized below the pH Action Levels before discharge.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.27	Mobile toilets should provide on site and located away the stream course.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.25	License collector should be employed for handling the sewage of mobile toilet.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
<b>Section 2: Air Quality</b>							
2.01	Are there wheel washing facilities with high pressure jets provided at every vehicle exit point?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.02	Are vehicles washed to remove any dusty materials from their bodies and wheels before leaving construction sites?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.03	Are the excavated materials sprayed with water during handling?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.04	Are stockpiles of dusty materials sprayed with water, covered or placed in sheltered areas?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Photo A
2.05	Is the exposed earth properly treated within six months after the last construction activities?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.06	Are the access roads sprayed with water to maintain the entire road surface wet or paved?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.07	Is the surface where any drilling, cutting, polishing or breaking operation continuously sprayed with water?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.08	Is the load on vehicles covered entirely by clean impervious sheeting?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.09	Is the loading of materials to a level higher than the side and tail boards during transportation by vehicles avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.10	Is the road leading to the construction site within 30m of the vehicle entrance kept clear of dusty materials?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.11	Is dark smoke emission from plant/equipment avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.12	Are de-bagging, batching and mixing processes carried out in sheltered areas during the use of bagged cement?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.13	Are site vehicles travelling within the speed limit not more than 15km/hour?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.14	Are hoardings of not less than 2.4m high provided along the site boundary, which adjoins areas accessible to the public?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.15	Is open burning avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.16	Excavated materials from the stream must remove form site on the same day. The materials shall be stored in covered impermeable skips awaiting removal from site.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
<b>Section 3: Noise</b>							
3.01	Are noisy equipment and activities positioned as far as practicable from the sensitive receivers?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.02	Is silenced equipment adopted?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.03	Is idle equipment turned off or throttled down?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.04	Are all plant and equipment well maintained and in good condition?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.05	Are noise barriers or enclosures provided at areas where construction activities cause noise impact on sensitive receivers?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.06	Are hand held breakers fitted with valid noise emission labels during operation?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.07	Are air compressors fitted with valid noise emission labels during operation?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

Note:	Not Obs.: Not Observed; Yes: Compliance; No: Non-Compliance; Follow Up: Observations requiring follow-Up actions N/A: Not Applicable	Not Obs.	Yes	No	Follow Up	N/A	Photo/Remarks
3.08	Are flaps and panels of mechanical equipment closed during operation?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.09	Are Construction Noise Permit(s) applied for percussive piling works?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.10	Are Construction Noise Permit(s) applied for general construction works during restricted hours?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.11	Are valid Construction Noise Permit(s) posted at site entrances?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.12	Use of quiet plant had been used on site to minimise the construction noise impact to the surrounding residences/dwellings (Level 1 mitigation measures).	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.13	Temporary/Moveable noise barrier or site hoarding are provide or erect at the site boundary to minimise the noise impact of the closest NSRs or stationary equipments shield by the noise barrier which cannot visible from NSRs (Level 2 mitigation measure)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.14	Temporary/Moveable noise barrier equal to or more than 3m height with 10kg/m2 are provide for noise mitigation measures (Level 2 mitigation measures).	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
<b>Section 4: Waste/Chemical Management</b>							
4.01	Waste Management Plan had been submit to Engineer for approval.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.02	Are receptacles available for general refuse collection?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.03	Is general refuse sorting or recycling implemented?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.04	Is general refuse disposed of properly and regularly?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.05	Is the Contractor registered as a chemical waste producer?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.06	Are the chemical waste containers properly labelled?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.07	Are the chemical wastes stored in proper storage areas?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.08	Is the chemical waste storage area properly labelled?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.09	Is the chemical waste storage area used for storage of chemical waste only?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.10	Are incompatible chemical wastes stored in different areas?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.11	Are the chemical wastes disposed of by licensed collectors?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.12	Are trip tickets for chemical wastes disposal available for inspection?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.13	Are chemical/fuel storage areas bunded?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.14	Are designated areas identified for storage and sorting of construction wastes?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.15	Are construction wastes sorted (inert and non-inert) on site?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.16	Are construction wastes reused?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.17	Are construction wastes disposed of properly?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.18	Are site hoardings and signboards made of durable materials instead of timber?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.19	Is trip ticket system implemented for the disposal of construction wastes and records available for inspection?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.20	Are appropriate procedures followed if contaminated material exists?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.21	Is relevant license/ permit for disposal of construction waste or excavated materials available for inspection?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.22	Site cleanliness and appropriate waste management training had provided for the site workers.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.23	Contaminated sediments will managed according to WBTC No.12/2000 and EWTB TC(W) No. 34/2002.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

<b>Note:</b> Not Obs.: Not Observed; Yes: Compliance; No: Non-Compliance; Follow Up: Observations requiring follow-Up actions N/A: Not Applicable		Not Obs.	Yes	No	Follow Up	N/A	Photo/Remarks
<b>Section 5: Landscape &amp; Visual</b>							
5.01	Are retained and transplanted trees in health condition?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
5.02	Are retained and transplanted trees properly protected?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Photo B
5.03	Are surgery works carried out for the damaged trees?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
5.04	Is damage to trees outside site boundary due to construction activities avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
5.05	Is the night-time lighting controlled to minimize glare to sensitive receivers?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
<b>Section 6: Ecology</b>							
6.01	Gabion banks and base had been provide for channel linings and banks for typical sections?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
6.02	Prevent site effluent/runoff discharge to the seasonal wetlands?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
6.03	Stockpiling or disposal of materials, and any dredging or construction activities at the seasonal wetlands are prohibited?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
<b>Section 7: Others</b>							
7.01	Are relevant Environmental Permits posted at all vehicle site entrances/exits?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

**Remarks**

**Follow-Up of Last Site Inspection (7 July 2009):**



Filter was setup for water treatment at TKL02.



Stagnant water was cleared at TKL07.



Filter was setup for water treatment at MUP01.



Stagnant water was cleared at MUP01.

Finding of Site Inspection on 14 July 2009:

TKL02



Photo A



Photo B

TKL07



Photo C



Photo D

MUP01/02



Photo E

Project: DSD Contract No. DC/2007/08  
Drainage Improvement Works at Tai Po Tin, Ping Che, Man Uk Pin and Lin Ma Hang

Inspected by \_\_\_\_\_  
 IEC/IEC's Representative: -  
 SRE/SRE's Representative: William Tang  
 ETL/ ET's Representative: Ben Tam  
 EO/EO's Representative: C.P Chan  
 Contractor's Representative: S. J. Yu

Checklist No. DC200708-210709

**Inspection**

Date: 21 July 2009  
 Time: 10:00

**PART A:**

**GENERAL INFORMATION**

**Environmental Permit No.**

Weather:  Sunny  Fine  Cloudy  Rainy  Calm   
 Temperature: 30 °C   
 Humidity:  High  Moderate  Low  N/A  
 Wind:  Strong  Breeze  Light  Calm

**Channel**

**Area Inspected**

TKL02  
 TKL07  
 MUP01/02

**PART B:**

**SITE AUDIT**

<b>Note:</b> Not Obs.: Not Observed; Yes: Compliance; No: Non-Compliance; Follow Up: Observations requiring follow-up actions N/A: Not Applicable		Not Obs.	Yes	No	Follow Up	N/A	Photo/Remarks
<b>Section 1: Water Quality</b>							
1.01	Is an effluent discharge license obtained for the Project?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.02	Is the effluent discharged in accordance with the discharge licence?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.03	Is the discharge of turbid water avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.04	Are there proper desilting facilities in the drainage systems to reduce SS levels in effluent?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Photo B
1.05	Are there channels, sandbags or bunds to direct surface run-off to sedimentation tanks?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.06	Are there any perimeter channels provided at site boundaries to intercept storm runoff from crossing the site?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.07	Is drainage system well maintained?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.08	As excavation proceeds, are temporary access roads protected by crushed stone or gravel?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.09	Are temporary exposed slopes properly covered?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.10	Are earthworks final surfaces well compacted or protected?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.11	Are manholes adequately covered or temporarily sealed?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.12	Are there any procedures and equipment for rainstorm protection?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.13	Are wheel washing facilities well maintained?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.14	Is runoff from wheel washing facilities avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.15	Are there toilets provided on site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.16	Are toilets properly maintained?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.17	Are the vehicle and plant servicing areas paved and located within roofed areas?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.18	Is the oil leakage or spillage avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.19	Are there any measures to prevent leaked oil from entering the drainage system?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.20	Are there any measures to collect spilt cement and concrete washings during concreting works?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

Note:	Not Obs.: Not Observed; Yes: Compliance; No: Non-Compliance; Follow Up: Observations requiring follow-Up actions N/A: Not Applicable	Not Obs.	Yes	No	Follow Up	N/A	Photo/Remarks
1.21	Are there any oil interceptors/grease traps in the drainage systems for vehicle and plant servicing areas, canteen kitchen, etc?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.22	Are the oil interceptors/grease traps maintained properly?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.23	Is used bentonite recycled where appropriate?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.24	Designated settlement area for runoff/wheel wash waste is provide and located at the streambed with 1-2m deep, 12m long and around 50m3 capacities for sedimentation.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.25	No excavation is undertaken in the settlement area.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.26	Concreting wastes water should be neutralized below the pH Action Levels before discharge.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.27	Mobile toilets should provide on site and located away the stream course.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.25	License collector should be employed for handling the sewage of mobile toilet.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
<b>Section 2: Air Quality</b>							
2.01	Are there wheel washing facilities with high pressure jets provided at every vehicle exit point?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.02	Are vehicles washed to remove any dusty materials from their bodies and wheels before leaving construction sites?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.03	Are the excavated materials sprayed with water during handling?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.04	Are stockpiles of dusty materials sprayed with water, covered or placed in sheltered areas?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.05	Is the exposed earth properly treated within six months after the last construction activities?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.06	Are the access roads sprayed with water to maintain the entire road surface wet or paved?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Photo A
2.07	Is the surface where any drilling, cutting, polishing or breaking operation continuously sprayed with water?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.08	Is the load on vehicles covered entirely by clean impervious sheeting?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.09	Is the loading of materials to a level higher than the side and tail boards during transportation by vehicles avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.10	Is the road leading to the construction site within 30m of the vehicle entrance kept clear of dusty materials?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.11	Is dark smoke emission from plant/equipment avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.12	Are de-bagging, batching and mixing processes carried out in sheltered areas during the use of bagged cement?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.13	Are site vehicles travelling within the speed limit not more than 15km/hour?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.14	Are hoardings of not less than 2.4m high provided along the site boundary, which adjoins areas accessible to the public?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.15	Is open burning avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.16	Excavated materials from the stream must remove form site on the same day. The materials shall be stored in covered impermeable skips awaiting removal from site.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
<b>Section 3: Noise</b>							
3.01	Are noisy equipment and activities positioned as far as practicable from the sensitive receivers?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.02	Is silenced equipment adopted?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.03	Is idle equipment turned off or throttled down?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.04	Are all plant and equipment well maintained and in good condition?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.05	Are noise barriers or enclosures provided at areas where construction activities cause noise impact on sensitive receivers?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.06	Are hand held breakers fitted with valid noise emission labels during operation?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.07	Are air compressors fitted with valid noise emission labels during operation?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

Note:	Not Obs.: Not Observed; Yes: Compliance; No: Non-Compliance; Follow Up: Observations requiring follow-Up actions N/A: Not Applicable	Not Obs.	Yes	No	Follow Up	N/A	Photo/Remarks
3.08	Are flaps and panels of mechanical equipment closed during operation?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.09	Are Construction Noise Permit(s) applied for percussive piling works?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.10	Are Construction Noise Permit(s) applied for general construction works during restricted hours?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.11	Are valid Construction Noise Permit(s) posted at site entrances?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.12	Use of quiet plant had been used on site to minimise the construction noise impact to the surrounding residences/dwellings (Level 1 mitigation measures).	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.13	Temporary/Moveable noise barrier or site hoarding are provide or erect at the site boundary to minimise the noise impact of the closest NSRs or stationary equipments shield by the noise barrier which cannot visible from NSRs (Level 2 mitigation measure)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.14	Temporary/Moveable noise barrier equal to or more than 3m height with 10kg/m2 are provide for noise mitigation measures (Level 2 mitigation measures).	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
<b>Section 4: Waste/Chemical Management</b>							
4.01	Waste Management Plan had been submit to Engineer for approval.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.02	Are receptacles available for general refuse collection?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.03	Is general refuse sorting or recycling implemented?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.04	Is general refuse disposed of properly and regularly?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.05	Is the Contractor registered as a chemical waste producer?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.06	Are the chemical waste containers properly labelled?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.07	Are the chemical wastes stored in proper storage areas?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.08	Is the chemical waste storage area properly labelled?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.09	Is the chemical waste storage area used for storage of chemical waste only?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.10	Are incompatible chemical wastes stored in different areas?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.11	Are the chemical wastes disposed of by licensed collectors?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.12	Are trip tickets for chemical wastes disposal available for inspection?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.13	Are chemical/fuel storage areas banded?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.14	Are designated areas identified for storage and sorting of construction wastes?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.15	Are construction wastes sorted (inert and non-inert) on site?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.16	Are construction wastes reused?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.17	Are construction wastes disposed of properly?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.18	Are site hoardings and signboards made of durable materials instead of timber?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.19	Is trip ticket system implemented for the disposal of construction wastes and records available for inspection?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.20	Are appropriate procedures followed if contaminated material exists?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.21	Is relevant license/ permit for disposal of construction waste or excavated materials available for inspection?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.22	Site cleanliness and appropriate waste management training had provided for the site workers.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.23	Contaminated sediments will managed according to WBTC No.12/2000 and EWTB TC(W) No. 34/2002.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

<b>Note:</b> Not Obs.: Not Observed; Yes: Compliance; No: Non-Compliance; Follow Up: Observations requiring follow-Up actions N/A: Not Applicable	Not Obs.	Yes	No	Follow Up	N/A	Photo/ Remarks
<b>Section 5: Landscape &amp; Visual</b>						
5.01 Are retained and transplanted trees in health condition?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____
5.02 Are retained and transplanted trees properly protected?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____
5.03 Are surgery works carried out for the damaged trees?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____
5.04 Is damage to trees outside site boundary due to construction activities avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____
5.05 Is the night-time lighting controlled to minimize glare to sensitive receivers?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____
<b>Section 6: Ecology</b>						
6.01 Gabion banks and base had been provide for channel linings and banks for typical sections?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____
6.02 Prevent site effluent/runoff discharge to the seasonal wetlands?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____
6.03 Stockpiling or disposal of materials, and any dredging or construction activities at the seasonal wetlands are prohibited?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____
<b>Section 7: Others</b>						
7.01 Are relevant Environmental Permits posted at all vehicle site entrances/exits?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____



Remarks

Follow-Up of Last Site Inspection (14 July 2009):



Stockpile was covered with tarpaulin at TKL02.



Preserved trees are properly fenced at TKL02.



Filter was set up at TKL07.



Stagnant water was cleared at TKL07.



Exposed slope was properly covered at MUP01/02.

Finding of Site Inspection on 21 July 2009:



**Photo A**

The Contractor is reminded to water the haul road regularly.



**Photo B**

Muddy water was observed during site inspection. The Contractor is advised to implement relative desilting facilities, such as set up gabion prior discharge to eliminate the SS content.

As a general reminder, the Contractor is advised to implement water mitigation measures to eliminate any accumulation of stagnant water on site especially in rainy season.

*IEC's representative*

*SRE's representative*

*ET's representative*

*EO's representative*

*Contractor's representative*

( )

( )

( Ben Tam )

( )

( )

## **Appendix L**

### **Proforma of Ecology Inspection Checklist**

**Environmental Team – Ecological Site Inspection and Audit Checklist**

Project: DSD Contract No. DC/2007/08  
Drainage Improvement Works at  
Tai Po Tin, Ping Che, Man Uk Pin and Lin Ma Hang

Inspection  
 Date: 27/10/08  
 Time: 11:00

Inspected by  
 IEC/IEC's Representative:  
 RE/RE's Representative:  
 ETL/ ET's Representative: YW Wong  
 EO/EO's Representative: CP Chan  
 Contractor's Representative:

Checklist No. EP-27-1

**PART A: GENERAL INFORMATION** Environmental Permit No. EP-277/2007

Weather:  Sunny  Fine  Cloudy  Rainy  Calm  N/A

Temperature: 30 °C

Humidity:  High  Moderate  Low

Wind:  Strong  Breeze  Light  Calm

Channel: MUP05 (MUP0102) Area Inspected: 2406 channel.

**PART B: SITE AUDIT**

Note:	EM&A REF:	Not Obs.: Not Observed; Yes: Compliance; No: Non-Compliance; Follow Up: Observations requiring follow-up actions N/A: Not Applicable	Not Obs.	Yes	No	Follow Up	N/A	Photo/Remarks
<b>Section 6: Ecology</b>								
1.01	6.5.8	earthworks to widen the stream have been undertaken from the landward side and existing stream untouched except during the final stage	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<u>no works on stream</u>
1.04	6.5.9	widened stream bottom floored with natural materials to approximate as closely as possible to the rocky components of a natural stream bottom	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<u>no works on stream</u>
1.02	6.5.10	Any essential works outside the dry season have been temporarily isolated from the stream	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.03	6.5.11	Excavation works have been restricted to 300m length at any one time	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<u>no excavation works</u>
1.04	6.5.13	native riparian trees which would be impacted during construction works have been transplanted to suitable sites within the project area where possible	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.05	6.5.22	Construction activities have been restricted to works area that should be clearly demarcated	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.06	6.5.22	Temporary diversions have been provided to ensure continuous water flow to the downstream section.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<u>no work on stream</u>
1.07	6.5.22	The proposed works site inside or in the proximity of natural streams have been temporarily isolated	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.08	6.5.22	no disturbance to the stream bed and bank have been found from construction works, equipment or workers for the stream section where the existing natural stream bed and bank will be left untouched	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.09	6.5.22	Temporary access track on streambed have been kept to the minimum width and length	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<u>no work on stream</u>
1.09	6.5.22	Temporary stream crossings are supported on stilts above the stream bed.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.10	6.5.22	Adequate temporary drainage measures including sediment and oil/grease traps have been provided to prevent contaminated site run-off entering the water bodies	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.11	6.5.22	Stockpiling of construction materials, spoils and waste have been properly covered and located away from water bodies	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

Note:	EM&A REF:	Not Obs.: Not Observed; Yes: Compliance; No: Non-Compliance; Follow Up: Observations requiring follow-up actions N/A: Not Applicable	Not Obs.	Yes	No	Follow Up	N/A	Photo/Remarks
1.12	6.5.22	Supervisory staff of the contractor have been assigned to station on site to closely supervise and monitor the construction works	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	no work observed during audit
1.13	6.5.22	workers have been regularly briefed to avoid disturbing the flora and fauna near the works area	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
1.14	6.5.22	Construction effluent, site run-off and sewage have been properly collected, treated and disposed	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.15	6.5.22	details of the mitigation measures to be implemented during construction stage have been submitted to the Engineer for approval	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

**Remarks**

- Area where a water siphonage into the stream has been rectified with improved design / construction of the siltation trap.
- No works was carried out in all of the stream since last audit because of weather

IEC's representative

RE's representative


ET's representative

EO's representative


Contractor's representative

( )

( )

  
(Keith Wong)

  
(C.P. Chan)

  
(Simon Yu)

**Environmental Team – Ecological Site Inspection and Audit Checklist**

Project: DSD Contract No. DC/2007/08 Inspected by \_\_\_\_\_ Checklist No. 0807-1  
Drainage Improvement Works at IEC/IEC's Representative: \_\_\_\_\_  
Tai Po Tin, Ping Che, Man Uk Pin and Lin Ma Hang RE/RE's Representative: \_\_\_\_\_  
 Inspection Date: 10/7/08 ETL/ET's Representative: YW Wong  
 Time: 11:00 EO/EO's Representative: Cl Chan  
 Contractor's Representative: KY Hau

**PART A: GENERAL INFORMATION** Environmental Permit No. \_\_\_\_\_

Weather:  Sunny  Fine  Cloudy  Rainy  Calm  EP-277/2007

Temperature: 30.2 °C  N/A

Humidity:  High  Moderate  Low

Wind:  Strong  Breeze  Light  Calm

Channel: MUP05 / MUP01/02 Area Inspected: Whole Channel

**PART B: SITE AUDIT**




Note:	EM&A REF:	Not Obs.: Not Observed; Yes: Compliance; No: Non-Compliance; Follow Up: Observations requiring follow-up actions N/A: Not Applicable	Not Obs.	Yes	No	Follow Up	N/A	Photo/Remarks
<b>Section 6: Ecology</b>								
1.01	6.5.8	earthworks to widen the stream have been undertaken from the landward side and existing stream untouched except during the final stage	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<u>earth work not start yet</u>
1.04	6.5.9	widened stream bottom floored with natural materials to approximate as closely as possible to the rocky components of a natural stream bottom	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<u>no work on stream yet</u>
1.02	6.5.10	Any essential works outside the dry season have been temporarily isolated from the stream	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<u>fencing</u>
1.03	6.5.11	Excavation works have been restricted to 300m length at any one time	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<u>no excavation work yet</u>
1.04	6.5.13	native riparian trees which would be impacted during construction works have been transplanted to suitable sites within the project area where possible	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.05	6.5.22	Construction activities have been restricted to works area that should be clearly demarcated	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.06	6.5.22	Temporary diversions have been provided to ensure continuous water flow to the downstream section.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<u>no work on stream yet</u>
1.07	6.5.22	The proposed works site inside or in the proximity of natural streams have been temporarily isolated	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.08	6.5.22	no disturbance to the stream bed and bank have been found from construction works, equipment or workers for the stream section where the existing natural stream bed and bank will be left untouched	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.09	6.5.22	Temporary access track on streambed have been kept to the minimum width and length	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<u>no work on stream yet</u>
1.09	6.5.22	Temporary stream crossings are supported on stilts above the stream bed.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.10	6.5.22	Adequate temporary drainage measures including sediment and oil/grease traps have been provided to prevent contaminated site run-off entering the water bodies	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.11	6.5.22	Stockpiling of construction materials, spoils and waste have been properly covered and located away from water bodies	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

Environmental Team – Ecological Site Inspection and Audit Checklist

Note:	EM&A REF:	Not Obs.: Not Observed; Yes: Compliance; No: Non-Compliance; Follow Up: Observations requiring follow-up actions N/A: Not Applicable	Not Obs.	Yes	No	Follow Up	N/A	Photo/Remarks
1.12	6.5.22	Supervisory staff of the contractor have been assigned to station on site to closely supervise and monitor the construction works	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.13	6.5.22	workers have been regularly briefed to avoid disturbing the flora and fauna near the works area	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.14	6.5.22	Construction effluent, site run-off and sewage have been properly collected, treated and disposed	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.15	6.5.22	details of the mitigation measures to be implemented during construction stage have been submitted to the Engineer for approval	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

Remarks

Hydro-seeding is recommended to be applied on the exposed surface in order to ~~not~~ prevent run-off to existing stream during wet season.

<i>IEC's representative</i>	<i>RE's representative</i>	<i>ET's representative</i>	<i>EO's representative</i>	<i>Contractor's representative</i>
( )	( )	(  )	(  )	(  )
		( <i>Keat Wey</i> )	( <i>C-P. Chan</i> )	( <i>K Y Han</i> )

**Environmental Team – Ecological Site Inspection and Audit Checklist**

Project: DSD Contract No. DC/2007/08  
Drainage Improvement Works at  
Tai Po Tin, Ping Che, Man Uk Pin and Lin Ma Hang

Inspected by \_\_\_\_\_  
 IEC/IEC's Representative: \_\_\_\_\_  
 RE/RE's Representative: \_\_\_\_\_  
 ETL/ ET's Representative: YW Wong  
 EO/EO's Representative: CP Chan  
 Contractor's Representative: KY Hui

Checklist No. 0107-3

Inspection Date: ~~16/12/08~~ 16/17/09  
 Time: 2:00

**PART A: GENERAL INFORMATION** Environmental Permit No. EP-277/2007

Weather:  Sunny  Fine  Cloudy  Rainy  Calm  EP-277/2007

Temperature: 28.6 °C

Humidity:  High  Moderate  Low  N/A

Wind:  Strong  Breeze  Light  Calm

Channel: MUP05 / MUP01/02 Area Inspected: Whole Channel.

**PART B: SITE AUDIT**

Note:	EM&A REF:	Not Obs.: Not Observed; Yes: Compliance; No: Non-Compliance; Follow Up: Observations requiring follow-up actions N/A: Not Applicable	Not Obs.	Yes	No	Follow Up	N/A	Photo/Remarks
<b>Section 6: Ecology</b>								
1.01	6.5.8	earthworks to widen the stream have been undertaken from the landward side and existing stream untouched except during the final stage	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<u>earth work not started yet</u>
1.04	6.5.9	widened stream bottom floored with natural materials to approximate as closely as possible to the rocky components of a natural stream bottom	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<u>no work on stream yet.</u>
1.02	6.5.10	Any essential works outside the dry season have been temporarily isolated from the stream	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<u>fencing</u>
1.03	6.5.11	Excavation works have been restricted to 300m length at any one time	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<u>no excavation work yet.</u>
1.04	6.5.13	native riparian trees which would be impacted during construction works have been transplanted to suitable sites within the project area where possible	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.05	6.5.22	Construction activities have been restricted to works area that should be clearly demarcated	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.06	6.5.22	Temporary diversions have been provided to ensure continuous water flow to the downstream section.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<u>no stream work on stream yet</u>
1.07	6.5.22	The proposed works site inside or in the proximity of natural streams have been temporarily isolated	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.08	6.5.22	no disturbance to the stream bed and bank have been found from construction works, equipment or workers for the stream section where the existing natural stream bed and bank will be left untouched	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.09	6.5.22	Temporary access track on streambed have been kept to the minimum width and length	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<u>no work on stream yet.</u>
1.09	6.5.22	Temporary stream crossings are supported on stilts above the stream bed.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.10	6.5.22	Adequate temporary drainage measures including sediment and oil/grease traps have been provided to prevent contaminated site run-off entering the water bodies	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.11	6.5.22	Stockpiling of construction materials, spoils and waste have been properly covered and located away from water bodies	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	






Environmental Team – Ecological Site Inspection and Audit Checklist

Note:	EM&A REF:	Not Obs.: Not Observed; Yes: Compliance; No: Non-Compliance; Follow Up: Observations requiring follow-up actions N/A: Not Applicable	Not Obs.	Yes	No	Follow Up	N/A	Photo/Remarks
1.12	6.5.22	Supervisory staff of the contractor have been assigned to station on site to closely supervise and monitor the construction works	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.13	6.5.22	workers have been regularly briefed to avoid disturbing the flora and fauna near the works area	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.14	6.5.22	Construction effluent, site run-off and sewage have been properly collected, treated and disposed	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.15	6.5.22	details of the mitigation measures to be implemented during construction stage have been submitted to the Engineer for approval	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

Remarks

General refuse was observed inside the stream, the Contractor should improve the house keeping of the construction site.

IEC's representative	RE's representative	ET's representative	EO's representative	Contractor's representative
( )	( )	(  )	(  )	(  )
		( C. P. Chan )	( C. P. Chan )	( K. Y. Ho )

Project: DSD Contract No. DC/2007/08  
Drainage Improvement Works at  
Tai Po Tin, Ping Che, Man Uk Pin and Lin Ma Hang

Inspection  
 Date: 23/7/08  
 Time: 1100

Inspected by  
 IEC/IEC's Representative: \_\_\_\_\_  
 RE/RE's Representative: \_\_\_\_\_  
 ETL/ ET's Representative: YW Wong  
 EO/EO's Representative: CP Chan  
 Contractor's Representative: KY Ho

Checklist No. 207-4

**PART A: GENERAL INFORMATION** Environmental Permit No. EP-277/2007

Weather:  Sunny  Fine  Cloudy  Rainy  Calm

Temperature: 31 °C

Humidity:  High  Moderate  Low  N/A

Wind:  Strong  Breeze  Light  Calm

Channel: MUP05 101/02 Area Inspected: for channel

**PART B: SITE AUDIT**

Note:	EM&A REF:	Not Obs.: Not Observed; Yes: Compliance; No: Non-Compliance; Follow Up: Observations requiring follow-up actions N/A: Not Applicable	Not Obs.	Yes	No	Follow Up	N/A	Photo/Remarks
<b>Section 6: Ecology</b>								
1.01	6.5.8	earthworks to widen the stream have been undertaken from the landward side and existing stream untouched except during the final stage	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<u>for MUP01, no work was carried out at 05/02</u>
1.04	6.5.9	widened stream bottom floored with natural materials to approximate as closely as possible to the rocky components of a natural stream bottom	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<u>MUP01 ongoing no work on MUP02/05</u>
1.02	6.5.10	Any essential works outside the dry season have been temporarily isolated from the stream	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.03	6.5.11	Excavation works have been restricted to 300m length at any one time	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<u>(for MUP01) no work on MUP02/05</u>
1.04	6.5.13	native riparian trees which would be impacted during construction works have been transplanted to suitable sites within the project area where possible	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.05	6.5.22	Construction activities have been restricted to works area that should be clearly demarcated	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.06	6.5.22	Temporary diversions have been provided to ensure continuous water flow to the downstream section.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<u>(for MUP01)</u>
1.07	6.5.22	The proposed works site inside or in the proximity of natural streams have been temporarily isolated	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.08	6.5.22	no disturbance to the stream bed and bank have been found from construction works, equipment or workers for the stream section where the existing natural stream bed and bank will be left untouched	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.09	6.5.22	Temporary access track on streambed have been kept to the minimum width and length	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.09	6.5.22	Temporary stream crossings are supported on stilts above the stream bed.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.10	6.5.22	Adequate temporary drainage measures including sediment and oil/grease traps have been provided to prevent contaminated site run-off entering the water bodies	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.11	6.5.22	Stockpiling of construction materials, spoils and waste have been properly covered and located away from water bodies	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

Note:	EM&A REF:	Not Obs.: Not Observed; Yes: Compliance; No: Non-Compliance; Follow Up: Observations requiring follow-up actions N/A: Not Applicable	Not Obs.	Yes	No	Follow Up	N/A	Photo/Remarks
1.12	6.5.22	Supervisory staff of the contractor have been assigned to station on site to closely supervise and monitor the construction works	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	no work was observed during audit
1.13	6.5.22	workers have been regularly briefed to avoid disturbing the flora and fauna near the works area	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
1.14	6.5.22	Construction effluent, site run-off and sewage have been properly collected, treated and disposed	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.15	6.5.22	details of the mitigation measures to be implemented during construction stage have been submitted to the Engineer for approval	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

**Remarks**

No work has been carried out in M0802/05 since last site audit.

The work carried out in M0801 was found to have no impact to the stream and mitigation measures were effectively implemented.

IEC's representative	RE's representative	ET's representative	EO's representative	Contractor's representative
( )	( )	( Keith Ong )	( C.P. Chan )	( R.Y. Han )

## **Appendix M**

### **Monthly Summary Waste Flow Table**

Name of Department: DSD

Contract No.: DC/2007/08Date: 29-Jul-09**Monthly Summary Waste Flow Table for 2009 (26 Jun to 25 July)**

Month	Actual Quantities of Inert C&D Wastes Generated Monthly						Actual Quantities of C&D Wastes Generated Monthly				
	Total Quantity Generated	Hard Rock and Large Broken Concrete	Reused in the Contract	Reused in other Projects	Disposed as Public Fill	Imported Fill	Metals	Paper/ cardboard packaging	Plastics (see Note 3)	Chemical Waste	Others, e.g. general refuse
	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000 kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000m3)
Jan	3.41	0	0	3.02	0	0.39	0	0	0	0	0.006
Feb	2.236	0	0	2.046	0	0.19	0.2	0	0	0	0.005
Mar	0.95	0.3	0.3	0	0	0.65	0.5	0	0	0	0
Apr	1.215	0	0	0	0	1.215	0.5	0	0	0	0.005
May	5.081	0	0	3.735	0	1.346	0.1	0	0	0	0.005
Jun	6.339	0	0	3.08	0	3.259	0.1	0	0	0	0
Sub-total	19.231	0.3	0.3	11.881	0	7.05	1.4	0	0	0	0.021
Jul	6.635	0	0	4.571	0	2.064	1	0.04	0	0	0.005
Aug											
Sep											
Oct											
Nov											
Dec											
Total	25.866	0.3	0.3	16.452	0	9.114	2.4	0.04	0	0	0.026

**Summary Table for Work Processes or Activities Requiring Timber for Temporary Works**

Contract No.: DC/2007/08

Date: 29 July 2009

Contract Title: DRAINAGE IMPROVEMENT WORKS AT TAI PO TIN, PING CHE, MAN UK PIN & LIN MA HANG

<b>Item No.</b>	<b>Description of Works Process or Activity</b> [see note (a) below]	<b>Justifications for Using Timber in Temporary Construction Works</b>	<b>Est. Quantities of Timber Used (m<sup>3</sup>)</b>	<b>Actual Quantities used (m<sup>3</sup>)</b>	<b>Remarks</b>
1.	Construction of foot bridge FBT07-3 (near ch.330)	Wall & top slab formwork	4.8	4.0	
2.	Construction of gabion transition (ch. 228 & 247)	Base slabs formwork (ch. 228 & 247) and wall formwork (ch. 247)	6.2	4.4	
3.					
4.					
5.					
6.					
7.					
8.					
<b>Total Estimated Quantity of Timber Used</b>			11.0		

- Notes:
- (a) The Contractor shall list out all the work items requiring timber for use in temporary construction works. Several minor work items may be grouped into one for ease of updating.
  - (b) The summary table shall be submitted to the Engineer's Representative monthly together with the Waste Flow Table for review and monitoring in accordance with the PS Clause 25.01E(5).

Forecast of Total Quantities of C&D Materials to be Generated from the Contract*										
Total Quantity Generated	Hard Rock and Large Broken Concrete	Reused in the Contract	Reused in other Projects	Disposed as Public Fill	Imported Fill	Metals	Paper/ cardboard packaging	Plastics (see Note 3)	Chemical Waste	Others, e.g. general refuse
(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000 kg)	(in '000 kg)	(in '000 kg)	(in '000 kg)	(in '000m <sup>3</sup> )
283.5	35.1	47.5	107	32	24	60	1	1	1	10

- Notes:
- (1) The performance targets are given in PS Clause 25.01F(14).
  - (2) The waste flow table shall also include C&D materials that are specified in the Contract to be imported for use at the Site.
  - (3) Plastics refer to plastic bottles/containers, plastic sheets/foam from packaging material
  - \* (4) The Contractor shall also submit the latest forecast of the total amount of C&D materials expected to be generated from the Works, together with a breakdown of the nature where the total amount of C&D materials expected to be generated from the Works is equal to or exceeding 50,000 m<sup>3</sup>. (PS Clause 25.01E(4)(b) refers). [Delete Note (4) and the table above on the forecast, where inapplicable].