

# Proposed Comprehensive Development at Wo Shang Wai Yuen Long

Monthly EM&A Report for August 2014  
(Rev A)

September 2014

Heng Shung Construction Co. Ltd.



# Proposed Comprehensive Development at Wo Shang Wai Yuen Long

Monthly EM&A Report for August 2014 (Rev A)

September 2014

Heng Shung Construction Co. Ltd.





**Pursuant to Condition 4.5 of Environmental Permit No. EP-311/2008/D,  
this Monthly EM&A Report for August 2014 has been reviewed,  
certified by Environmental Team Leader (ETL) and verified by the  
Independent Environmental Checker (IEC).**

**Certified by:**



---

Terence Kong  
Environmental Team Leader (ETL)  
Mott MacDonald Hong Kong Ltd.

**Date**

12 September 2014

**Verified by:**



---

David Yeung  
Independent Environmental Checker (IEC)  
ENVIRON Hong Kong Limited

**Date**

12 September 2014



# Contents

<b>Chapter</b>	<b>Title</b>	<b>Page</b>
	Executive Summary	i
<b>1</b>	<b>Introduction</b>	<b>1</b>
1.1	Background _____	1
1.2	Project Organization _____	1
1.3	Environmental Status in the reporting period _____	1
1.4	Summary of EM&A Requirements _____	2
<b>2</b>	<b>Impact Monitoring Methodology</b>	<b>4</b>
2.1	Introduction _____	4
2.2	Air Quality _____	4
2.3	Construction Noise _____	7
2.4	Water Quality _____	9
2.5	Ecology _____	12
2.6	Landscape and Visual _____	13
<b>3</b>	<b>Monitoring Results</b>	<b>17</b>
3.1	Impact Monitoring Schedule _____	17
3.2	Results of Impact Monitoring _____	17
<b>4</b>	<b>Ecological Monitoring</b>	<b>23</b>
4.1	Monitoring of Birds _____	23
4.2	Monitoring of Herpetofauna _____	23
4.3	Monitoring of Dragonflies and Butterflies _____	23
4.4	Monitoring of Mammals _____	24
4.5	Monitoring of Water Quality _____	24
4.6	Management Activities _____	24
4.7	Summary _____	24
<b>5</b>	<b>Landscape and Visual</b>	<b>26</b>
5.1	Site Inspections _____	26
5.2	Construction Phase Audit Summary _____	26
<b>6</b>	<b>Environmental Site Inspection and Audit</b>	<b>29</b>
6.1	Site Inspection _____	29
6.2	Solid and Liquid Waste Management Status _____	29
6.3	Status of Environmental Licenses and Permits _____	29
6.4	Recommended Mitigation Measures _____	30
<b>7</b>	<b>Report on Non-compliance, Complaints, Notifications of Summons and Successful Prosecutions</b>	<b>31</b>

7.1	Record on Non-compliance of Action and Limit Levels _____	31
7.2	Record on Environmental Complaints received _____	32
7.3	Record on Notifications of Summons and Successful Prosecution _____	33
7.4	Review of Reasons for and Implications of Non-compliance, Complaints, Summons and Prosecutions _____	33
7.5	Follow-up Actions Taken _____	33
7.6	Cumulative Statistics for Complaints, Notifications of Summons and Successful Prosecutions _____	34
<b>8</b>	<b>Future Key Issues</b>	<b>35</b>
8.1	Site Preparatory Works and Construction Works for the Coming Month _____	35
8.2	Key Issues for the Coming Months _____	35
8.3	Monitoring Schedule for the Coming Month _____	35
8.4	Conclusions and Recommendations _____	36

## Tables

Table 1.1:	Summary of Impact EM&A Requirements _____	2
Table 1.2:	Environmental Monitoring and Audit Schedule for August 2014 _____	3
Table 2.1:	Air Quality Monitoring Parameters, Frequency and Duration _____	4
Table 2.2:	Air Monitoring Stations _____	4
Table 2.3:	TSP Monitoring Equipment _____	5
Table 2.4:	Noise Monitoring Parameters, Frequency and Duration _____	7
Table 2.5:	Noise Monitoring Stations _____	8
Table 2.6:	Noise Monitoring Equipment _____	8
Table 2.7:	Water Quality Monitoring Parameters, Frequency and Duration _____	9
Table 2.8:	Water Quality Monitoring Stations _____	9
Table 2.9:	Water Quality Monitoring Equipment _____	10
Table 2.10:	Analytical Methods applied to Water Quality Samples _____	10
Table 2.11:	Detection Limits for Water Quality Determinants _____	11
Table 2.12:	Summary of Construction Phase Ecological Monitoring for the Wo Shang Wai Wetland Restoration Area (WRA) _____	12
Table 2.13:	Construction and Operation Phase Audit Checklist _____	14
Table 2.14:	Proposed Construction Phase Mitigation Measures _____	14
Table 2.15:	Proposed Operation Phase Mitigation Measures _____	15
Table 3.1:	Summary of 1-hour TSP Monitoring Results _____	17
Table 3.2:	Summary of 24-hour TSP Monitoring Results _____	18
Table 3.3:	Summary of Construction Noise Monitoring Results _____	19
Table 3.4:	Summary of Water Quality Monitoring Results _____	20
Table 4.1:	Summary of Ecological Monitoring in WRA and Survey Area _____	24
Table 5.1:	Construction and Operation Phase Audit Summary _____	26
Table 6.1:	Summary of Site Inspections and Recommendations _____	29
Table 6.2:	Status of Environmental Submissions, Licenses and Permits _____	29
Table 7.1:	Summary of Exceedances in Water Quality _____	31
Table 7.2:	Statistics for Complaints, Notifications of Summons and Successful Prosecutions _____	34
Table 8.1:	Tentative Environmental Monitoring and Audit Schedule for September 2014 _____	36

## List of Figures

Figure 1.1	General Layout Plan of the Project Site
Figure 2.1	Locations of Air Quality Monitoring Stations
Figure 2.2	Locations of Noise Monitoring Stations
Figure 2.3	Locations of Water Quality Monitoring Stations
Figure 4.1	Survey Area and Transect Walked

## List of Appendices

Appendix A	Project Organization Chart
Appendix B	Tentative Construction Programme
Appendix C	Action and Limit Levels for Construction Phase
Appendix D	Event and Action Plan for Air Quality, Noise and Water Quality
Appendix E	Calibration Certificates
Appendix F	Graphical Plots of the Monitoring Results
Appendix G	Weather Conditions during the Monitoring Period
Appendix H	Ecological Monitoring Conducted
Appendix I	Summary of Bird Surveys Conducted
Appendix J	Summary of Herpetofauna, Mammal and Insect Surveys Conducted
Appendix K	Summary of Monitoring of Water Quality and Soil Quality associated with Ecological Monitoring Conducted
Appendix L	Environmental Mitigation Measures - Implementation Status
Appendix M	Landscape and Visual Audit Photos

# Executive Summary

Mott MacDonald Hong Kong Ltd. (“MMHK”) has been commissioned by Heng Shung Construction Co. Ltd. to undertake the Environmental Team (ET) services to carry out environmental monitoring and audit (EM&A) for both pre-construction and construction phases of the Proposed Comprehensive Development at Wo Shang Wai, Yuen Long.

This is the 52<sup>nd</sup> EM&A report submitted under the Condition 4.5 of Environmental Permit No. EP-311/2008/D. This report summarises the findings on EM&A during the period from 1 to 31 August 2014.

## Exceedance of Action and Limit Levels

There was no breach of Action or Limit levels for Air Quality (1-hr TSP and 24-hr TSP) and Noise level (as  $L_{eq}$ ) in the reporting month.

During August 2014, two exceedances of DO were observed at MP3. No exceedance was observed at MP4, MP5 and MP6.

The summary of measured water quality is presented in **Section 3.2.3**.

Investigations have been carried out to identify the causes of exceedance. From investigation, the Contractor has implemented water quality mitigation measures as recommended in the EIA report. With external factors affecting the adjacent environments, such as natural variations, pond fish culture activities and rainfall, the exceedances were considered not due to the project construction works.

## Implementation of Mitigation Measures

Site audits were carried out on 5, 12, 19 and 26 August 2014 to confirm the implementation measures undertaken by the Contractor in the reporting month. The outcomes are presented in **Section 6** and the status of implementation of mitigation measures in the site is shown in **Appendix L**.

## Record of Complaints

There was no new record of complaints received in the reporting month.

## Record of Notification of Summons and Successful Prosecution

There was no record of Notification of summons and successful prosecution in the reporting month.

## Reporting Changes

There was no reporting change in the reporting month.

## Future Key Issues

The major site works scheduled to be commissioned in the coming three months include site formation, foundation work and pond drainage management in the Wetland Restoration Area (to lower the water level

and remove unwanted species in the pond). Potential environmental impacts due to the construction activities, including air quality, noise, water quality, ecology and landscape and visual, will be monitored.

Environmental mitigation measures will be implemented on site as recommended and weekly site audits will be carried out to ensure that the environmental conditions are acceptable.

# 1 Introduction

## 1.1 Background

In March 2005, the Project Proponent, Profit Point Enterprises Limited, acquired the development site at Wo Shang Wai in Yuen Long. An Environmental Impact Assessment (EIA) was then carried out and approved under the EIA Ordinance (EIAO), and the Environmental Permit (EP-311/2008) for construction of the comprehensive development in Wo Shang Wai was first granted by EPD on 9 September 2008 and has been subsequently varied, with the current version (EP-311/2008/D) issued by EPD on 20 March 2013.

The Project involves the residential development and associated infrastructure and wetland restoration area and linear landscape area. The construction works under the Environmental Permit commenced on 12 May 2010. The site formation construction works of the Wetland Restoration Area (hereafter WRA) were completed on 15 November 2010, while the 30-month establishment period of the WRA was concluded in August 2012 – this indicated that planting works as scheduled in the approved Wetland Restoration and Creation Scheme (WRCS; Nov 2009) was complete, except along the western and southern boundary where the planting is affected by the existing site boundary and noise barrier, and for which a Variation to Environmental Permit (EP-311/2008/C) to defer planting at the location was approved. The current valid EP (EP-311/2008/D) includes specific mitigation measures to minimise certain identified noise impacts during the operation phase.

Mott MacDonald Hong Kong Ltd. (“MMHK”) has been commissioned by the Contractor, Heng Shung Construction Co. Ltd., to undertake the Environmental Team (ET) services to carry out environmental monitoring and audit (EM&A) for both pre-construction and construction phases of the Proposed Comprehensive Development at Wo Shang Wai, Yuen Long.

According to the EP Condition 4.5, the monthly EM&A Report shall be submitted to the Director within two weeks after the end of the reporting month. This report summarises the findings during the period from 1 to 31 August 2014.

## 1.2 Project Organization

The organisation chart and lines of communication with respect to the on-site environmental management structure together with the contact information of the key personnel are shown in **Appendix A**.

## 1.3 Environmental Status in the reporting period

During the reporting month, construction works of the Project undertaken include:

- Site formation
- Foundation work
- Pond drainage management in the Wetland Restoration Area (to lower the water level and remove unwanted species in the pond)



The Construction Works Programme of the Project is provided in **Appendix B**. The general layout plan of the Project site is shown in **Figure 1.1**.

#### 1.4 Summary of EM&A Requirements

The EM&A programme requires environmental monitoring of air quality, noise, water quality, ecology and landscape and visual as specified in the approved EM&A Manual.

A summary of impact EM&A requirements is presented in **Table 1.1** below:

Table 1.1: Summary of Impact EM&A Requirements

Parameters	Descriptions	Locations	Frequencies
Air Quality	24-Hour TSP	ASR1, ASR2A, ASR3, ASR4	Once every 6 days
	1-Hour TSP	ASR1, ASR2A, ASR3, ASR4	3 times every 6 days
Noise	$L_{eq}$ , 30min	NSR1, NSR3, NSR5, NSR7	Weekly
Water Quality	Dissolved Oxygen (DO), temperature, pH, suspended solids (SS) and Biological Oxygen Demand (BOD)	MP1 to MP6	3 days per week
Ecology	Birds	Within the Project Area and Assessment Area of 500m	Weekly
	Dragonflies and Butterflies	Within the Project Area and Assessment Area of 500m	Once per month during Mar and Sep to November, and twice per month during Apr to Aug
	Herpetofauna	Within the Project Area and Assessment Area of 500m	Once per month during Apr to Nov
	Water quality of Wetland Restoration Area (WRA)	WRA	After filling of WRA with water, monthly for in situ water quality and every six months (end of wet season and end of dry season) for laboratory testing
	Site Inspections	Within the Project Area and Assessment Area of 500m	Weekly
Landscape and Visual	Auditing of protection of existing trees, the transplanting of existing trees, the creation of new wetland, the planting of new trees and shrubs and other landscape and visual mitigation measures	CM1 to CM10 and OM1 to OM7 within the Project Area	Site inspections once every two weeks during construction phase; once every two months during operational phase

The Environmental Quality Performance Limits for air quality, noise and water quality are shown in **Appendix C**.

The Event and Action Plan for air quality, noise and water quality are shown in **Appendix D**.

The monitoring schedule for the reporting month is shown in **Table 1.2** below

Table 1.2: Environmental Monitoring and Audit Schedule for August 2014

Environmental Monitoring and Audit Schedule for Aug 2014						
Sun	Mon	Tue	Wed	Thu	Fri	Sat
					1 Water 24-hr TSP 1-hr TSP	2
3	4 Water	5 <b>Bird</b> *	6 Water	7 24-hr TSP 1-hr TSP Noise Monitoring	8 Water	9
10	11 Water	12 <b>Bird</b> <b>Dragonfly &amp; Butterfly</b> <b>Herpetofauna</b> *	13 Water 24-hr TSP 1-hr TSP Noise Monitoring	14 <b>Landscape</b> @	15 Water	16
17	18 Water	19 <b>Bird</b> 24-hr TSP 1-hr TSP Noise Monitoring *	20 Water	21	22 Water	23
24	25 Water 24-hr TSP 1-hr TSP Noise Monitoring	26 <b>Bird</b> Water Quality Monitoring <b>Dragonfly &amp; Butterfly</b> <b>Herpetofauna</b> *	27 Water	28	29 Water <b>Landscape</b> 24-hr TSP 1-hr TSP	30
31						

\* Site Audit by Mott MacDonald (MM)

Ecological Surveys & Landscape Audits indicated in **bold font**

@ Report Submission (Monthly EM&A Report)

## 2 Impact Monitoring Methodology

### 2.1 Introduction

For air quality, construction noise and water quality, ecology, landscape and visual monitoring methodology, including the monitoring locations, monitoring equipment used, monitoring parameters, and frequency and duration, etc, are detailed in this Chapter.

### 2.2 Air Quality

#### 2.2.1 Monitoring Parameters, Frequency and Duration

In accordance with the EM&A Manual, 1-hour and 24-hour TSP levels monitoring are to be conducted during the construction phase. **Table 2.1** summarizes the monitoring parameters, frequency and duration of air quality monitoring.

Table 2.1: Air Quality Monitoring Parameters, Frequency and Duration

Monitoring Stations	Parameter	Frequency and Duration
ASR1, ASR2A, ASR3 & ASR4	24-hour TSP	At least once in every six-days
	1-hour TSP	3 times every six-days

#### 2.2.2 Monitoring Locations

The four air quality monitoring stations were established in the EM&A manual and were slightly adjusted during the baseline monitoring phase. Locations of the agreed air quality monitoring stations are listed in **Table 2.2** and as shown in **Figure 2.1**.

Table 2.2: Air Monitoring Stations

Monitoring Stations	Locations
ASR1	Works Site Boundary
ASR2A	At the rooftop of refuse collection point, which is located at the southwest of the project area
ASR3	At the commercial centre at Palm Springs, which is located at the south of the project area
ASR4	Works Site Boundary

#### 2.2.3 Monitoring Equipment

Continuous 24-hour TSP air quality monitoring is conducted using High Volume Sampler (HVS) (Model: GMWS-2310 Accu-vol). The HVS meets all the requirements of the EM&A Manual. Portable direct reading dust meters were used to carry out the 1-hour TSP monitoring. **Table 2.3** summarizes the equipment used in the impact air quality monitoring.

Table 2.3: TSP Monitoring Equipment

Equipment	Model
<b>24-hr TSP monitoring</b>	
High Volume Sampler	GMWS 2310 Accu-vol
Calibrator	GMW 25
<b>1-hr TSP monitoring</b>	
Portable direct reading dust meter	AM510 SidePak Personal Aerosol Monitor Dust Trak 8520

## 2.2.4 Monitoring Methodology

### 2.2.4.1 24-hour TSP Monitoring

#### Installation

The HVS was installed in the vicinity of the air sensitive receiver. The following criteria were considered in the installation of the HVS.

- A horizontal platform with appropriate support to secure the sampler against gusty wind was provided.
- The distance between the HVS and any obstacles, such as buildings, was at least twice the height that the obstacle protrudes above the HVS.
- A minimum of two metres separation from walls, parapets and penthouse was required for rooftop sampler.
- A minimum of two metres separation from any supporting structure, measured horizontally was required.
- No furnace or incinerator flues or building vent were nearby.
- Airflow around the sampler was unrestricted.
- The sampler has been more than 20 metres from any drip line.
- Permission was obtained to set up the samplers and to obtain access to the monitoring stations.
- A secured supply of electricity is needed to operate the samplers.

#### Preparation of Filter Papers

- Glass fibre filters, were labelled and sufficient filters that were clean and without pinholes were selected.
- All filters were equilibrated in the conditioning environment for 24 hours before weighing. The conditioning environment temperature was around 25 °C and not variable by more than  $\pm 3$  °C with relative humidity (RH) < 50 % and was not variable by more than  $\pm 5$  %. A convenient working RH was 40 %.

## Field Monitoring

- The power supply was checked to ensure the HVS works properly.
- The filter holder and the area surrounding the filter were cleaned.
- The filter holder was removed by loosening the four bolts and a new filter, with stamped number upward, on a supporting screen was aligned carefully.
- The filter was properly aligned on the screen so that the gasket formed an airtight seal on the outer edges of the filter.
- The swing bolts were fastened to hold the filter holder down to the frame. The pressure applied should be sufficient to avoid air leakage at the edges.
- The shelter lid was closed and was secured with the aluminium strip.
- The HVS was warmed-up for about 5 minutes to establish run-temperature conditions.
- A new flow rate record sheet was set into the flow recorder.
- The flow rate of the HVS was checked and adjusted at around 1.1 m<sup>3</sup>/min. The range specified in the EM&A Manual was between 0.6-1.7 m<sup>3</sup>/min.
- The programmable timer was set for a sampling period of 24 hrs + 1 hr, and the starting time, weather condition and the filter number were recorded.
- The initial elapsed time was recorded.
- At the end of sampling, the sampled filter was removed carefully and folded in half length so that only surfaces with collected particulate matter were in contact.
- It was then placed in a clean plastic envelope and sealed.
- All monitoring information was recorded on a standard data sheet.
- Filters were sent to a HOKLAS accredited laboratory for analysis.

## Maintenance and Calibration

- The HVS and its accessories are maintained in good working condition, such as replacing motor brushes routinely and checking electrical wiring to ensure a continuous power supply.
- HVSs were calibrated at two-month intervals.
- Calibration records for HVSs are shown in **Appendix E**.

### 2.2.4.2 1-hour TSP Monitoring

#### Field Monitoring

The measuring procedures of the 1-hour dust meter are in accordance with the Manufacturer's Instruction Manual as follows:

- Set POWER to “ON”, push BATTERY button, make sure that the meter’s indicator is in the range with a red line and allow the instrument to stand for about 3 minutes (Then, the air sampling inlet has been capped).
- Push the knob at MEASURE position.
- Push “O-ADJ” button. (Then meter’s indication is 0).
- Push the knob at SENSI ADJ position and set the meter’s indication to S value described on the Test Report using the trimmer for SENSI ADJ.
- Pull out the knob and return it to MEASURE position.
- Push “START” button.

#### Maintenance and Calibration

- The 1-hour dust meter would be checked at 3-month intervals and calibrated at 1-year intervals throughout all stages of the air quality monitoring.
- Calibration records for direct dust meters are shown in **Appendix E**.

### 2.3 Construction Noise

#### 2.3.1 Monitoring Parameters, Frequency and Duration

Following the requirements in the EM&A Manual for noise, noise monitoring has to be carried out during the construction phase. Continuous noise monitoring for the A-weighted levels  $L_{eq}$ ,  $L_{10}$  and  $L_{90}$  is undertaken once per every week.

**Table 2.4** summarizes the monitoring parameters, frequency and duration of air quality monitoring.

Table 2.4: Noise Monitoring Parameters, Frequency and Duration

Monitoring Stations	Parameter	Frequency and Duration
NSR1, NSR3, NSR5, NSR7	$L_{eq}$ , $L_{90}$ & $L_{10}$	Once every week

#### 2.3.2 Monitoring Locations

The four noise quality monitoring stations were established in the EM&A manual and were slightly adjusted during the baseline monitoring phase. Locations of the agreed noise quality monitoring stations are listed in **Table 2.5** and as shown in **Figure 2.2**.

Table 2.5: Noise Monitoring Stations

Monitoring Stations	Locations	Type of measurement
NSR1	Noise monitoring equipment was set up near the boundary wall at Palm Springs.	Free-field
NSR3	The monitoring station was located next to the guard house at Palm Springs.	Facade
NSR5	The monitoring station was located within the work site boundary.	Free-field
NSR7	The monitoring station was located near the boundary wall of the house of Mai Po San Tsuen.	Free-field

### 2.3.3 Monitoring Equipment

Integrating Sound Level Meter will be used for noise monitoring. It is a Type 1 sound level meter capable of giving a continuous readout of the noise level readings including equivalent continuous sound pressure level ( $L_{eq}$ ) and percentile sound pressure level ( $L_x$ ). They comply with International Electrotechnical Commission Publications 651:1979 (Type 1) and 804:1985 (Type 1). **Table 2.6** summarizes the noise monitoring equipment model being used.

Table 2.6: Noise Monitoring Equipment

Monitoring Stations	Equipment Model	
	Integrating Sound Level Meter	Calibrator
NSR1	Rion NL-52	Rion NC-73
NSR3		
NSR5		
NSR7		

### 2.3.4 Monitoring Methodology

#### Field Monitoring

- The Sound Level Meter was set on a tripod at a height of at least 1.2 m above the ground.
- Façade and free-field measurements were made at the monitoring locations.
- The battery condition was checked to ensure the correct functioning of the meter.
- Parameters such as frequency weighting, the time weighting and the measurement time were set as follows:
  - frequency weighting: A
  - time weighting: Fast
  - time measurement: 30 minutes intervals (between 07:00 and 19:00)

- Prior to and after each noise measurement, the meter was calibrated using a Calibrator for 94 dB at 1 kHz. If the difference in the calibration level before and after measurement was more than 1 dB, the measurement would be considered invalid has to be repeated after re-calibration or repair of the equipment.
- During the monitoring period, the  $L_{eq}$ ,  $L_{10}$  and  $L_{90}$  were recorded. In addition, any site observations and noise sources were recorded on a standard record sheet.

#### Maintenance and Calibration

- The microphone head of the sound level meter and calibrator is cleaned with soft cloth at quarterly intervals.
- The meter and calibrator are sent to the supplier or HOKLAS laboratory to check and calibrate at yearly intervals.
- Calibration records are shown in **Appendix E**.

## 2.4 Water Quality

### 2.4.1 Monitoring Parameters, Frequency and Duration

In accordance with the requirements in the EM&A Manual for water quality, water quality parameters including Dissolved Oxygen (DO), temperature, pH, turbidity, suspended solids (SS) and Biochemical Oxygen Demand (BOD) have to be monitored at designated monitoring stations during construction of the Project. DO, temperature and pH were measured in-situ whereas SS and BOD were analysed in a laboratory. The measurements should be taken at all designated monitoring stations, three days per week. The interval between any two sets of monitoring was not less than 36 hours. **Table 2.7** summarizes the monitoring parameters, frequency and duration of water quality monitoring.

Table 2.7: Water Quality Monitoring Parameters, Frequency and Duration

Monitoring Stations	Parameter	Frequency and Duration
MP1, MP2, MP3, MP4, MP5 & MP6	DO, temperature, pH, SS, turbidity, BOD	Three days every week

### 2.4.2 Monitoring Locations

The six water quality monitoring stations were established in the EM&A manual. Locations of the agreed water quality monitoring stations are listed in **Table 2.8** and as shown in **Figure 2.3**.

Table 2.8: Water Quality Monitoring Stations

Monitoring Stations	Easting	Northing
MP1	838 730.50	822 862.25
MP2	838 933.26	823 247.41
MP3	839 107.17	823 596.84



Monitoring Stations	Easting	Northing
MP4	839 286.14	823 638.55
MP5	839 134.35	823 722.99
MP6	839 063.02	823 842.25

### 2.4.3 Monitoring Equipment

The Water Quality Monitoring Equipment and Analytical Methods applied to Water Quality Samples are given in **Table 2.9** and **Table 2.10** respectively. Details of which are discussed below.

Table 2.9: Water Quality Monitoring Equipment

Equipment	Model	Equipment/Serial Number
Conductivity, Dissolved oxygen, pH, Salinity and Temperature Measuring Meter	YSI Professional Plus	10D101565/09K100735
Turbidity Meter	Hach 2100Q IS/Hach 2100Q	13120C004242/09120C000514
Global Positioning System (GPS)	Garmin eTrex Vista	ENO 007

Table 2.10: Analytical Methods applied to Water Quality Samples

Determinant, unit	Standard Method
Total Suspended Solids, mg/L	In house method based on APHA 2540D; ALS Method Code: EA-025
Biochemical Oxygen Demand (BOD), mg/L	In house method based on APHA 5210B; ALS Method Code: EP-030

All in-situ monitoring instruments were checked, calibrated and certified by a laboratory accredited under HOKLAS or any other international accreditation scheme before use.

#### Dissolved Oxygen (DO), temperature and pH measuring equipment

A portable, weatherproof multiparameter instrument (YSI Professional Plus) was used in the monitoring. It can be capable for measuring dissolved oxygen (DO), pH, and temperature simultaneously with the following limits:

- a dissolved oxygen level in the range of 0-50 mg/L and 0-500 % saturation;
- a temperature of -5 to 45 degree Celsius; and
- pH value of 0-14 with 0.1 as the base unit.

#### Turbidity Measurement Instrument

Portable and weatherproof turbidity meter (HACH model 2100Q) was used during impact monitoring. It has a photoelectric sensor capable of measuring turbidity between 0-1000 NTU. Response of the sensor was checked with certified standard turbidity solutions before the start of measurement.

## Global Positioning System

A hand-held GPS navigator (Garmin eTrex Vista) was used to identify the designated monitoring stations prior to water sampling.

## Suspended Solids and BOD Measurements (Sample Containers and Storage)

Water samples for SS analysis were stored in high density polythene bottles with no preservative added, packed in ice (cooled to 4°C without being frozen), delivered to the laboratory, and analysed as soon as possible after collection. Analysis was carried out in a HOKLAS accredited laboratory.

### 2.4.4 Detection Limit

The limits of detection for the in-situ and laboratory measurements are shown in **Table 2.11**.

Table 2.11: Detection Limits for Water Quality Determinants

Determinant	Limit of Detection
Dissolved Oxygen	0.1 mg/L
Temperature	0.1 degree Celsius
pH	0.01 unit
Turbidity	0.1 NTU
Suspended Solids	1 mg/L
BOD	2 mg/L

### 2.4.5 Monitoring Methodology

#### In situ measurement

All pH meters, DO/temperature meters had been checked and calibrated prior to use. Standard buffer solution of at least two pH levels (either pH 4 and pH 7, or pH 7 and pH 10) had been used for calibration of the instrument before and after use.

DO meters had been calibrated by a laboratory accredited under HOKLAS or any other international accreditation scheme, and subsequently re-calibrated at three-monthly intervals throughout all stages of the water quality monitoring. Responses of sensors and electrodes had been checked with certified standard solutions before each use. Wet bulb calibrations for all DO meters had been carried out before measurement at each monitoring location. For the on-site calibration of field equipment, BS 127:1993, "Guide to field and on-site test methods for the analysis of waters" had been observed.

Measurements shall be at three water depths, namely, 1m below water surface, mid-depth and 1m above stream bed/pond bed, except where the water depth less than 6m, the mid-depth station maybe omitted. Should the water depth be less than 3m, only the mid-depth station will be monitored.

Replicates in-situ measurements and samples collected from each independent monitoring event are required for all parameters to ensure a robust statistically interpretable dataset.

### Water Samples Preparation and Analysis

For collection of water sampling within the water courses, a 500ml clean plastic beaker was used. After collection, the water samples were stored in high-density polythene bottles. The sample container was rinsed with a portion of the water sample. The water sample was then transferred to the container, labelled with a unique sample ID and sealed with a screw cap. The water samples were stored in a cool box maintained at 4°C. The water samples were then delivered to a local HOKLAS-accredited laboratory (ALS) on the same day for analysis.

The testing methods of testing parameters as recommended by EIA or required by EPD, with the QA/QC results are in accordance with the requirement of HOKLAS or international accredited scheme.

The calibration certificates for equipment used for in-situ monitoring of water quality are attached in **Appendix E**.

## 2.5 Ecology

### 2.5.1 Monitoring Parameters, Frequency and Duration

Target species and certain other fauna will be monitored within the Project Area and Assessment Area during the wetland and residential construction phase. This will be important to ensure that any unexpected events or impacts either on- or off-site are quickly identified so that remedial action can be taken. The groups to be monitored and frequency of monitoring are shown in **Table 2.12**.

Table 2.12: Summary of Construction Phase Ecological Monitoring for the Wo Shang Wai Wetland Restoration Area (WRA)

Species / Parameter	Construction Phase Ecological Monitoring
Birds	Weekly (including Assessment Area).
Dragonflies and Butterflies	Once per month during March and September to November, and twice per month during April to August.
Herpetofauna	Once per month during April to November.
Water Quality	After filling of WRA with water, monthly for <i>in situ</i> water quality and every six months (end of the wet season and end of the dry season) for laboratory testing.
Site Inspections	Weekly.

### 2.5.2 Monitoring Locations and Methodology

Ecological monitoring locations during construction phase are shown in **Figure 4.1** and the methodology for ecological monitoring is detailed in **Section 4**.

## 2.6 Landscape and Visual

### 2.6.1 Monitoring Parameters, Frequency and Duration

All measures undertaken by both the Contractor and the specialist Landscape Sub-Contractor during the construction phase and first year of the operational phase shall be audited by a Registered Landscape Architect, as a member of the ET, on a regular basis to ensure compliance with the intended aims of the measures. Site inspections should be undertaken at least once every two weeks throughout the construction period and once every two months during the operational phase.

The broad scope of audit is detailed below but should also be undertaken with reference to the more specific checklist provided in **Table 2.13** below. Operational phase auditing will be restricted to the last 12 months of the establishment works of the landscaping proposals and thus only the items below concerning this period are relevant to the operational phase.

- The extent of the agreed works area should be regularly checked during the construction phase. Any trespass by the Contractor outside the limit of the works, including any damage to existing trees and woodland shall be noted;
- The progress of the engineering works should be regularly reviewed on site to identify the earliest practical opportunities for the landscape works to be undertaken;
- All existing vegetation, streams and other features within the study area which are not directly affected by the works are retained and protected;
- The methods of protecting existing vegetation proposed by the Contractor are acceptable and enforced;
- Preparation, lifting transport and re-planting operations for any transplanted trees;
- The layout, design and construction of buildings conforms to requirements specified in the EIA report;
- All landscaping works are carried out in accordance with the EIA recommendations and with specifications;
- The planting of new trees, shrubs, groundcover, climbers, grasses and other plants, together with the replanting of any transplanted trees are carried out properly and within the right season;
- All necessary horticultural operations and replacement planting are undertaken throughout the Establishment Period to ensure the healthy establishment and growth of both transplanted trees and all newly establishment plants.

Table 2.13: Construction and Operation Phase Audit Checklist

Area of Works	Items to be Monitored
Works Area	Check the extent of the Works to ensure that the Works Area is not exceeded
Protection of all trees and woodland blocks to be retained	Identification and demarcation of trees / vegetation to be retained, erection of physical protection (e.g. fencing), monitoring against possible incursion, physical damage, fire, pollution, surface erosion, etc.
Streams	Ensure no run-off into existing streams
Clearance of existing vegetation	Identification and demarcation of trees / vegetation to be cleared, checking of extent of works to minimize damage, monitoring of adjacent areas against possible incursion, physical damage, fire, pollution, surface erosion, etc.
Transplanting of trees	Identification and demarcation of trees / vegetation to be transplanted, monitoring of extent of pruning / lifting works to minimize damage, timing of operations implementation of all stages of preparatory and translocation works, and maintenance of transplanted vegetation, etc.
Topsoil stripping	Ensuring existing topsoil is stripped and stored under recognized good practice and is hydroseeded and regularly turned to prevent anaerobic conditions
New buildings	Ensure that building finishes accord with mitigation proposals with regard to colour and albedo.
Boundaries	Ensuring hoarding are erected as required
Noise Barrier	Ensure noise barrier design accords with the mitigation proposals with regard to location, materials and finishes.
Night-time lighting	Ensuring night-time lighting is directional, hooded and shielded away from VSRs
Plant supply	Monitoring of operations relating to the supply of specialist plant material (including the collecting, germination and growth of plants from seed) to ensure that plants will be available in time to be used within the construction works.
Landscape and wetland treatments generally	Check that wetland, and hard / soft landscape designs conform to intent of mitigation measures and agreed designs
Soiling, planting, etc.	Monitoring of implementation and maintenance of soiling and planting works against possible incursion, physical damage, fire, pollution, surface erosion, etc.
Establishment Works	Monitoring of implementation of maintenance operation during Establishment Period

## 2.6.2 Monitoring Locations

The monitoring locations should check against the mitigation measures proposed under the approved Environmental Impact Assessment, which are summarised as follows in **Table 2.14** and **Table 2.15**:

Table 2.14: Proposed Construction Phase Mitigation Measures

ID No.	Landscape and Visual Mitigation Measure
CM1	The construction area and contractor's temporary works areas should be minimised to avoid impacts on adjacent landscape.
CM2	Screening of construction works by hoardings/noise barriers around Works area in visually unobtrusive colours, to screen Works.

ID No.	Landscape and Visual Mitigation Measure
CM3	Reduction of construction period to practical minimum.
CM4	Topsoil, where identified, should be stripped and stored for re-use in the construction of the soft landscape works, where the soil material meets acceptable criteria and where practical. The Contract Specification shall include storage and reuse of topsoil as appropriate.
CM5	Hydroseeding or sheeting of soil stockpiles with visually unobtrusive material (in earth tone).
CM6	Advance screen planting to noise barriers.
CM7	Control night-time lighting and glare by hooding all lights.
CM8	Ensure no run-off into streams adjacent to Project Area.
CM9	Protection of existing trees on boundary of project area shall be carefully protected during construction. Detailed Tree Protection Specification shall be provided in the Contract Specification. Under this specification, the Contractor shall be required to submit, for approval, a detailed working method statement for the protection of trees prior to undertaking any works adjacent to all retained trees, including trees in contractor's works areas. (Tree protection measures will be detailed at S16 and Tree Removal Application stage).
CM10	Trees unavoidably affected by the works shall be transplanted where practical. Trees should be transplanted straight to their destinations and not held in a nursery. A detailed Tree Transplanting Specification shall be provided in the Contract Specification, if applicable. Sufficient time for necessary tree root and crown preparation periods shall be allowed in the project programme.

Table 2.15: Proposed Operation Phase Mitigation Measures

ID No.	Landscape Mitigation Measure
OM1	Compensatory Tree Planting for all felled trees shall be provided to the satisfaction of relevant Government departments. Required numbers and locations of compensatory trees shall be determined and agreed separately with Government during the Tree Felling Application process under ETWBTC 3/2006.
OM2	A continuous belt of screen planting along southern perimeter of project area with fast growing tree species. At least 450 trees capable of reaching a height > 10m within 10 years should be planted. Planting of the belt of trees shall be carried out as advance works ahead of other site formation and building works.
OM3	Maximise soft landscape and amenity water bodies in residential areas of the development. Approximately 750 trees (of Heavy Standard size) should be planted. Where space permits, roadside berms should be created. Street trees should be of species that reach a mature height of no less than 15m.
OM4	Maximise freshwater habitat wetland creation consistent with achieving other parameters. Minimum 4.74 ha to be provided. Wetlands must have natural edge profiles with >1m wide emergent zone. No access to the wetland by residents and all wetlands must be screened from residential development by a continuous tree screen at interface with residential development or earth mounding such that disturbance is minimised. Implementation of the wetland shall be carried out as advance works.
OM5	Use appropriate (visually unobtrusive and non-reflective) building materials and colours in built structures.

ID No.	Landscape Mitigation Measure
OM6	During detailed design, refine building layout to create a min. 10m wide gap between buildings north of Wo Shang Wai pond and also two min. 10m wide gaps in the row of buildings adjacent to Royal Palms.
OM7	Streetscape elements (e.g. paving, signage, street furniture, lighting etc.) shall be sensitively designed in a manner that responds to the local context, and minimises potential negative landscape and visual impacts. Lighting units should be directional and minimise unnecessary light spill.

## 3 Monitoring Results

### 3.1 Impact Monitoring Schedule

Impact monitoring for air quality (dust), noise and water quality due to the construction work were undertaken during the reporting month in compliance with the EM&A manual in the reporting period. Regular site inspections were carried out on 5, 12, 19 and 26 August 2014 in the reporting month to assess the compliance with environmental requirements.

### 3.2 Results of Impact Monitoring

#### 3.2.1 Air Quality Monitoring

##### 3.2.1.1 1-hr TSP

Results of 1-hour TSP at the four monitoring locations are summarised in **Table 3.1**. Graphical plots of the monitoring results are shown in **Appendix F**. The weather conditions in the reporting period are provided in **Appendix G**.

Table 3.1: Summary of 1-hour TSP Monitoring Results

Monitoring Date	Start Time	1-hr TSP ( $\mu\text{g}/\text{m}^3$ )			Range ( $\mu\text{g}/\text{m}^3$ )	Action Level ( $\mu\text{g}/\text{m}^3$ )	Limit Level ( $\mu\text{g}/\text{m}^3$ )
		1 <sup>st</sup> Result	2 <sup>nd</sup> Result	3 <sup>rd</sup> Result			
<b>ASR1</b>							
01-Aug-14	12:59	119	117	116	65-119	378	500
07-Aug-14	12:52	71	75	79			
13-Aug-14	12:55	65	68	70			
19-Aug-14	12:52	81	78	83			
25-Aug-14	12:42	65	72	66			
29-Aug-14	12:48	89	93	85			
<b>ASR2A</b>							
01-Aug-14	08:57	112	119	117	64-119	357	500
07-Aug-14	08:51	76	78	72			
13-Aug-14	09:00	65	64	67			
19-Aug-14	08:51	79	77	70			
25-Aug-14	08:58	70	68	66			
29-Aug-14	08:51	68	73	76			
<b>ASR3</b>							
01-Aug-14	08:38	117	115	110	59-117	358	500
07-Aug-14	08:32	77	79	84			
13-Aug-14	08:40	59	66	69			
19-Aug-14	08:32	83	76	75			
25-Aug-14	08:39	64	60	71			
29-Aug-14	08:29	79	75	70			
<b>ASR4</b>							
01-Aug-14	12:33	118	119	123	68-123	372	500
07-Aug-14	12:30	80	76	72			



Monitoring Date	Start Time	1-hr TSP ( $\mu\text{g}/\text{m}^3$ )			Range ( $\mu\text{g}/\text{m}^3$ )	Action Level ( $\mu\text{g}/\text{m}^3$ )	Limit Level ( $\mu\text{g}/\text{m}^3$ )
		1 <sup>st</sup> Result	2 <sup>nd</sup> Result	3 <sup>rd</sup> Result			
13-Aug-14	12:30	68	75	73			
19-Aug-14	12:30	84	86	80			
25-Aug-14	12:30	77	75	68			
29-Aug-14	12:31	86	90	97			

### 3.2.1.2 24-hr TSP

Results of 24-hour TSP at the four monitoring locations are summarised in **Table 3.2**. Graphical plots of the monitoring results are shown in **Appendix F**. The weather conditions in the reporting period are provided in **Appendix G**.

Table 3.2: Summary of 24-hour TSP Monitoring Results

Monitoring Date	Monitoring Results ( $\mu\text{g}/\text{m}^3$ )	Range ( $\mu\text{g}/\text{m}^3$ )	Action Level ( $\mu\text{g}/\text{m}^3$ )	Limit Level ( $\mu\text{g}/\text{m}^3$ )
<b>ASR1</b>				
01-Aug-14	84	66-86	226	260
07-Aug-14	86			
13-Aug-14	68			
19-Aug-14	74			
25-Aug-14	66			
29-Aug-14	71			
<b>ASR2A</b>				
01-Aug-14	78	61-82	213	260
07-Aug-14	80			
13-Aug-14	61			
19-Aug-14	66			
25-Aug-14	82			
29-Aug-14	71			
<b>ASR3</b>				
01-Aug-14	83	61-90	205	260
07-Aug-14	90			
13-Aug-14	70			
19-Aug-14	61			
25-Aug-14	79			
29-Aug-14	71			
<b>ASR4</b>				
01-Aug-14	76	70-89	237	260
07-Aug-14	89			
13-Aug-14	75			
19-Aug-14	76			

Monitoring Date	Monitoring Results ( $\mu\text{g}/\text{m}^3$ )	Range ( $\mu\text{g}/\text{m}^3$ )	Action Level ( $\mu\text{g}/\text{m}^3$ )	Limit Level ( $\mu\text{g}/\text{m}^3$ )
25-Aug-14	70			
29-Aug-14	76			

No exceedance of 1-hour and 24-hour TSP (Action or Limit Level) was recorded in the reporting period.

### 3.2.2 Construction Noise Monitoring

The construction noise monitoring results are summarized in **Table 3.3**. Graphical plots of the monitoring data are shown in **Appendix F**. The weather conditions in the reporting period are provided in **Appendix G**.

Table 3.3: Summary of Construction Noise Monitoring Results

Monitoring Date	Start Time	Mean & Range of Noise Levels, dB(A)			Limit Level for $L_{eq}$ (dB)	
		$L_{eq}$	$L_{10}$	$L_{90}$		
<b>NSR1</b>						
07-Aug-14	09:08	51	52	42	> 75	
13-Aug-14	09:17	51	53	43		
19-Aug-14	09:08	60	62	50		
25-Aug-14	09:15	50	51	42		
<b>NSR3</b>						
07-Aug-14	09:53	59	61	39		
13-Aug-14	10:02	57	59	49		
19-Aug-14	09:53	53	55	45		
25-Aug-14	10:03	57	58	43		
<b>NSR5</b>						
07-Aug-14	13:01	58	60	49		
13-Aug-14	13:04	57	59	50		
19-Aug-14	13:01	58	59	53		
25-Aug-14	13:09	53	54	46		
<b>NSR7</b>						
07-Aug-14	13:49	66	67	62		
13-Aug-14	13:54	66	68	64		
19-Aug-14	13:51	67	69	64		
25-Aug-14	13:59	65	66	62		

No exceedance (Action/Limit Level) of construction noise was recorded in the reporting period.

### 3.2.3 Water Quality Monitoring

The water quality monitoring results are summarized in **Table 3.4**. Graphical plots of the monitoring data are shown in **Appendix F**. The weather conditions in the reporting period are provided in **Appendix G**.

Table 3.4: Summary of Water Quality Monitoring Results

Monitoring Date	Temp (°C)	pH	Dissolved Oxygen (DO) (mg/L)	DO (%)	Turbidity (NT)	BOD (mg/L) <sup>(1)</sup>	Suspended Solids (mg/L)
<b>MP3</b>							
01/08/2014	27.7	7.5	6.7	85.4	25.4	3.5	21.5
04/08/2014	27.3	7.5	7.1	89.0	25.6	3	12
06/08/2014	26.7	7.5	6.2	85.3	16.9	2	14
08/08/2014	28.1	7.5	6.9	88.9	15.3	4	10.5
11/08/2014	26.8	7.4	7.2	90.7	24.8	2.5	27
13/08/2014	28.1	7.5	7.6	97.5	31.9	2	28
15/08/2014	27.8	7.4	7.1	90.5	15.9	2	17.5
18/08/2014	27.6	7.5	7.6	96.3	18.8	2.5	18
20/08/2014	26.1	7.4	7.5	91.1	25.2	2.5	22.5
22/08/2014	25.5	7.4	7.4	90.1	12.9	3	10.5
25/08/2014	27.5	7.5	7.6	95.8	12.9	2.5	7
27/08/2014	26.9	7.5	7.1	88.7	21.8	2	10.5
29/08/2014	27.1	7.5	7.3	91.6	12.2	3	10.5
Action Level	-	<5.5 or >7.5	<6.85	-	>64	-	>65
Limit Level	-	<4.0 or >8.0	<6.65	-	>67	-	>66
<b>MP4</b>							
01/08/2014	27.1	7.4	6.5	82.1	35.1	3	32
04/08/2014	27.1	7.4	5.7	81.9	31.6	4	23
06/08/2014	26.6	7.4	6.8	92.6	18.4	2.5	33.5
08/08/2014	28.1	7.4	6.6	85.1	17.8	3	19.5
11/08/2014	26.9	7.4	6.6	83.0	25.2	4	20.5
13/08/2014	28.4	7.4	6.8	88.4	48.6	3	40
15/08/2014	27.9	7.4	7.5	95.8	18.6	<2	12.5
18/08/2014	27.3	7.4	7.1	89.8	25.5	3	38
20/08/2014	26.3	7.4	7.1	88.7	16.0	3	16.5
22/08/2014	26.2	7.4	7.6	94.7	24.8	2	18
25/08/2014	27.1	7.4	6.7	84.7	39.9	5	46
27/08/2014	27.4	7.4	7.2	90.8	32.9	4	21.5
29/08/2014	27.7	7.4	7.2	92.3	15.4	2	13
Action Level	-	<5.5 or >7.5	<3.91	-	>60	-	>50
Limit Level	-	<4.0 or >8.0	<3.82	-	>64	-	>53
<b>MP5</b>							
01/08/2014	27.5	7.4	6.9	88.3	34.8	3	35.5
04/08/2014	27.5	7.4	5.8	81.3	33.1	4	23
06/08/2014	26.9	7.4	6.2	86.3	19.3	2.5	34
08/08/2014	27.9	7.4	6.8	87.9	18.9	3	15
11/08/2014	27.1	7.4	6.9	87.3	26.1	3	19.5
13/08/2014	28.1	7.4	7.0	90.8	47.4	3	38
15/08/2014	28.3	7.4	6.8	87.7	19.8	<2	15

Monitoring Date	Temp (°C)	pH	Dissolved Oxygen (DO) (mg/L)	DO (%)	Turbidity (NT)	BOD (mg/L) <sup>(1)</sup>	Suspended Solids (mg/L)
18/08/2014	27.5	7.4	6.6	83.8	28.1	3	40.5
20/08/2014	26.5	7.4	7.3	90.3	17.3	2.5	14
22/08/2014	25.8	7.4	7.3	90.5	24.4	2	23.5
25/08/2014	27.4	7.4	7.5	96.1	25.8	4	26
27/08/2014	27.1	7.4	6.9	87.8	25.3	3	14.5
29/08/2014	27.4	7.4	6.8	86.8	17.6	2.5	16
Action Level	-	<5.5 or >7.5	<4.13	-	>81	-	>66
Limit Level	-	<4.0 or >8.0	<3.87	-	>84	-	>69
<b>MP6</b>							
01/08/2014	27.6	7.4	7.0	89.4	36.5	3.5	35
04/08/2014	28.0	7.4	6.1	83.4	34.8	4	25
06/08/2014	27.0	7.4	6.3	90.5	18.7	3	31.5
08/08/2014	27.8	7.4	7.3	93.5	19.3	3	16.5
11/08/2014	27.0	7.4	7.0	88.8	26.4	3	25
13/08/2014	28.3	7.4	6.5	83.9	44.4	3	37.5
15/08/2014	28.1	7.4	6.6	85.0	21.2	<2	14.5
18/08/2014	27.8	7.4	7.3	93.7	30.4	3	43
20/08/2014	26.2	7.4	7.1	86.8	16.9	3	13.5
22/08/2014	25.4	7.4	7.6	93.0	25.9	2	23.5
25/08/2014	27.4	7.4	7.2	91.7	31.1	4.5	34.5
27/08/2014	27.2	7.4	6.3	79.6	29.8	3	19.5
29/08/2014	27.5	7.4	6.9	87.8	21.7	3	25
Action Level	-	<5.5 or >7.5	<4.61	-	>94	-	>75
Limit Level	-	<4.0 or >8.0	<4.52	-	>96	-	>75

Notes:

- (1) “<2 “ : BOD value is too low to indicate (<2mg/L).
- (2) Values **Bold** indicate Action Level exceedance.
- (3) Values **Underlined and Bold** indicate Limit Level exceedance.

### 3.2.3.1 Exceedance Investigation and Findings

During August 2014, two exceedances of DO were observed at MP3. No exceedance was observed at MP4, MP5 and MP6.

The Event and Action Plan in **Appendix D** was followed under these cases of exceedances.

From investigation, construction activities during the period of exceedance included mainly site formation and foundation work, as well as pond drainage management in the Wetland Restoration Area (to lower the water level and remove unwanted species in the pond). It was observed that the Contractor has implemented water quality mitigation measures as recommended in the EIA report, including the provision of temporary drainage facility and associated treatment facility. Sand bags are in place in the temporary

drainage channel to enhance the desilting efficiency. The Contractor further enhanced the water quality mitigation measures by erecting several segments of rock bunds and installing a barrier at the discharge outlet to desilt and divert site runoff to sedimentation tanks and wastewater treatment facilities (Aquased), which will ensure all site runoff is treated to satisfactory quality before discharging into the northern ditches.

#### Exceedances of DO at MP3

During the reporting month at MP3, exceedance of the Action/Limit Level of DO was observed on 10 monitoring dates. As understood, the fish pond near the site (represented by MP3) was being separated from the construction site by the WRA since November 2010, so the exceedances were not considered to be related to the construction activities. The exceedances of DO may be due to external factors such as pond fish culture activities which were out of the control of the project.

#### Conclusion

As a result, the abovementioned exceedances are unlikely to be due to the construction works and therefore not considered to be related to the project.

## 4 Ecological Monitoring

### 4.1 Monitoring of Birds

This report documents surveys conducted in the Survey Area between 1 and 31 August 2014. The Wetland Restoration Area (WRA) is also surveyed as the area is accessible and site formation works for WRA has been completed. The updated survey transect is provided in **Figure 4.1**. Dates and ecological surveys conducted during this period are summarised in **Appendix H**.

Monitoring was undertaken following the survey methodology in the EM&A Manual. A transect was followed in the bird surveys (see **Figure 4.1**). All bird species were identified to species and all bird species of conservation importance and/or wetland dependent were enumerated and recorded to the habitats in which they were observed. Flying birds were not recorded unless they were foraging and/or associated with the habitat (such as swifts). Further, notable bird observations during other surveys were also recorded.

Bird surveys were conducted on a weekly basis. A total of 31 bird species were recorded in the Survey Area (excluding the WRA), 18 of which were species of conservation importance and/or wetland-dependence. Within the WRA, 29 bird species were recorded, 13 of which were species of conservation importance and/or wetland-dependent species, including two of the target species (i.e. Little Egret, Chinese Pond Heron) were recorded in regular survey. The WRA continues to attract a number of species of conservation importance, including Yellow Bittern, *Ixobrychus sinensis* and Wood Sandpiper, *Tringa glareola*, in regular survey and additional night search. These species are listed by Fellowes et al. as of "Local Concern" in 2002.

### 4.2 Monitoring of Herpetofauna

One day time and one night time herpetofauna survey were conducted in the period. No amphibian species and reptile species were recorded in the Survey Area (excluding the WRA) in regular survey but one amphibian species was recorded in the Survey Area (excluding the WRA) in additional search. No amphibian species and reptile species were recorded within the WRA in regular survey and additional search.

A summary of the survey findings is provided in **Appendix J**.

### 4.3 Monitoring of Dragonflies and Butterflies

Odonatas and butterflies surveys were conducted on a bi-weekly basis according to the EM&A Manual. Six odonata species and no butterfly species were recorded in the Survey Area (excluding the WRA). Within the WRA, ten odonata species were recorded, while two butterfly species were recorded.

A summary of the survey findings is provided in **Appendix J**.

#### 4.4 Monitoring of Mammals

Monitoring of mammals was conducted concurrently with other surveys. No mammals were recorded in the Survey Area nor within the WRA during regular survey and additional night search.

A summary of the survey findings is provided in **Appendix J**.

#### 4.5 Monitoring of Water Quality

The pH of Cell 1, 2 and 4 exceed the Action Level during the reporting period. Monitoring data are presented in **Appendix K**.

#### 4.6 Management Activities

##### 4.6.1 Vegetation Management

Removal of exotic vegetation in all cells was undertaken; these included but not limited to *Ipomoea sp.*, *Mikania sp.*, *Mimosa sp.*, *Pennisetum sp.* and *Typha sp.*

Vegetation management activities undertaken at the site primarily involved watering of plants, weeding and grass cutting.

##### 4.6.2 Wildlife Management

Removal of Golden Apple Snail was undertaken on an “as-seen” basis.

All sighted Red Fire Ant nests were treated with approved pesticide.

#### 4.7 Summary

Ecological monitoring during August 2014 was carried out according to the survey methodology and frequency outlined in the EM&A Manual.

Summary of survey findings is listed in **Table 4.1** below:

Table 4.1: Summary of Ecological Monitoring in WRA and Survey Area

Species	Survey Area (excluding WRA)	WRA
Birds (total)	31	29
Birds (of conservation importance and/or wetland-dependence)	18	13
Amphibians	1	0
Reptiles	0	0
Mammals	0	0
Odonates	6	10

Species	Survey Area (excluding WRA)	WRA
Butterflies	0	2

Survey findings indicate that the ponds within the Survey Area supported numbers and diversity of wetland-dependent birds typical of fish pond areas. The WRA continues to attract wetland dependent fauna and serves as a buffer between the residential portion and the fishponds in the north.



## 5 Landscape and Visual

### 5.1 Site Inspections

The EM&A programme for Landscape and Visual impact due to the construction commenced in June 2010 and continued during the reporting period. Site inspections on Landscape and Visual impact were carried out on 14 and 29 August 2014 to confirm the implementation of mitigation measures at construction stage.

### 5.2 Construction Phase Audit Summary

The audit was undertaken with references to the specific checklists provided in **Tables 2.13 – 2.15** and audit results are summarized below in **Table 5.1**. Representative photos showing the implementation of mitigation measures are presented in **Appendix M**.

Table 5.1: Construction and Operation Phase Audit Summary

Area of Works	Items to be Monitored
Works Area	<p>The boundaries of the works area have been established on site in accordance with the contract documents and approved plans (EP), and the limit of current heavy construction activity is now confined to within the site hoardings (North side of the site / access road) and the noise barriers (other sides of the site). Minor works such as horticultural maintenance of the planting and transplanted trees, and boundary fence repair was proceeding along the Royal Palms – Palm Springs boundary. (<b>Appendix M Photo 1 – Table 2.14 CM2 refers</b>)</p> <p>No construction works were observed to have exceeded the site boundaries. No construction was carried out at the wetland restoration area after 15 November 2010.</p>
Protection of all trees and woodland blocks to be retained	Trees retained within the site along the northeast boundary, beside wetland restoration area, have been identified and protected by temporary protective fencing.
Streams	The works site is partly encircled by a berm / perimeter channel to intercept surface water and prevent it from washing off into any of the neighboring sites. Surface water is collected within the site in a temporary drainage channel. Gravels beds and barriers have been installed to filter site runoff, sedimentation ponds have been provided to enable primary treatment before discharge to mains drains.
Clearance of existing vegetation	Site clearance was completed prior to the commencement of construction.
Transplanting of trees	Tree transplanting has been completed, with the trees relocated to various points within the planting strip along the southern boundary of the site, outside the noise barrier. The trees continue to re-establish well.

Topsoil stripping	<p>Suitable pond bund and soil material which had been excavated and stockpiled from the original site, has now been re-used within the landscape works.</p> <p>Dust suppression measures are active along all internal site access tracks.</p>
New buildings	No new permanent buildings have yet been constructed on site.
Boundaries	<p>Hoardings have been erected along most of the boundaries of the site. Installation of new screen fence between the future residential sites and the constructed wetland restoration areas is complete. Fence has been painted green to match with the surrounding vegetated environment. <b>(Appendix M Photo 1 – Table 2.14 CM2 refers)</b></p>
Noise Barrier	<p>Noise barriers have been installed along the southern and western boundaries of the site in accordance with the contract requirements. Their design complies with the mitigation requirements, with upper 6 to 7m portion of the barrier being made from a translucent material with green tinted (to match with the environment). Supporting GMS structure, likewise, has been painted green. <b>(Appendix M Photo 4 – Table 2.14 CM6 refers)</b></p>
Night-time lighting	No night-time works were reported to have been carried out during the monitoring period
Landscape and wetland treatments generally	<p>Continuous belt of screen planting along the southern and western boundaries of the site has been completed. The formation, soiling and water control structures of the wetland restoration area have been completed. <b>(Appendix M Photo 3 – Table 2.14 CM6 refers)</b></p> <p>The wetland areas are being established, with the ponds are being seasonally filled with rain water. Planting of areas around the WRA cells is complete. No construction was carried out at the wetland restoration area after 15 November 2010. <b>(Appendix M Photo 2 – Table 2.14 CM2 refers)</b></p>
Soiling, etc.	The soiling for the advance planting strip has been completed. The soil placement and grading for each of the wetland restoration areas has been completed.
Plant supply	<p>The plant material used in the Advance Planting Strip and in the WRA are all commonly available species and came from commercial sources.</p> <p>Transplanted reeds (<i>Phragmites australis</i>) at the wetland habitat came from the temporary holding nursery onsite.</p>

<p>Planting</p>	<p>The total number of trees that will reach a minimum of 10m in the advance planting strip meets the contract requirements. The tree species are all from the approved list. This planting should achieve the required screening effect within the required time period. <b>(Appendix M Photo 3 – Table 2.14 CM6 refers)</b></p> <p>Some of the trees that were identified as dead in previous month or having defects (i.e. extensive bark damage, cavities, fungal growths, etc.) still need to be replaced with new specimens. Some of the recently planted trees are still in poor condition, but are showing small signs of graduate improvement</p> <p>Seedling trees and shrubs, have been established at the margins of the wetland cells. Some additional fill-in planting has been undertaken.</p>
<p>Establishment Works</p>	<p>The advance planting, the compensatory planting and transplanted trees are generally being maintained by the landscape sub-contractor in accordance with the specification to ensure that the contract requirements are met, although treatment of damaged / defective trees needs urgent attention.</p> <p>Some of the trees that were identified as dead in previous month still need to be replaced with new specimens. Trees with significant defects (i.e. extensive bark damage, cavities, fungal growths, etc.) need to be replaced with new specimens.</p> <p>Most overhanging trees from adjacent property that were affecting the strip planting have been pruned back.</p> <p>Many trees are growing (and have become dependent for support) on the noise barrier frame, and are being deformed and damaged. Trees should either be physically separated from the structure, or the structure modified to avoid impacting on trees.</p> <p>Pruning of tall shrubs (e.g. <i>Ligustrum sinensis</i>) needs to be undertaken regularly.</p> <p>Removal of extensive growth of weeds and invasive climbers in the space behind screen noise barrier needs to be undertaken on a monthly basis as they may be inhibiting the advance planting.</p> <p><i>Phragmites australis</i> reeds are now occupying at least 80% of the reed bed areas within the WRC (as per design), but have also spread to the non-reed bed areas and are out-competing the intended planting. Management of this vegetation is required if the intended planting design is to be achieved.</p> <p>Regular horticultural maintenance (grass cutting, weeding, watering etc.) in the shrubs and tree seedling areas around the WRA cells is being undertaken. A comprehensive tree survey has just been undertaken by the new landscape contractor.</p> <p>The growth of shrubs / seedlings on the north side of WRA1 remains fair.</p>

## 6 Environmental Site Inspection and Audit

### 6.1 Site Inspection

The ET had carried out construction phase weekly site inspections on 5, 12, 19 and 26 August 2014. All observations have been recorded in the site inspection checklist and passed to the Contractor together with the appropriate recommended mitigation measures where necessary. The key observations from site inspections and associated recommendations are summarized in **Table 6.1**.

Table 6.1: Summary of Site Inspections and Recommendations

Key Observations	ET Recommendation	Contractor's Responses / Action(s) Undertaken	Close-out (Date)
No major observations during the reporting month	-	-	-

### 6.2 Solid and Liquid Waste Management Status

The Contractor has been registered as a chemical waste producer for the Project. Construction and demolition (C&D) material sorting was carried out on site. A sufficient number of receptacles were available for general refuse collection.

As advised by the Contractor, 3.9 tonnes C&D material was generated on site during the period. 2 kg of metals was generated and collected by registered recycling collector. 2 kg of paper/cardboard packing and 2 kg of plastic were generated on site and collected by registered recycling collector. No chemical waste was generated and collected by licensed chemical waste collector. 7 kg of other types of wastes (e.g. general refuse) was generated on site and disposed of at public landfill facility.

The Contractor is advised to maintain on site waste sorting and recording system and maximize reuse / recycling of C&D wastes.

### 6.3 Status of Environmental Licenses and Permits

The environmental permits, licenses, and/or notifications on environmental protection for this Project which were valid during the reporting period is summarised in Table 6.2.

Table 6.2: Status of Environmental Submissions, Licenses and Permits

Statutory Reference	Description	Permit/Reference No.	Status
EIAO	Environmental Permit	EP-311/2008/D	Valid
APCO	Notification of Construction Work under APCO	316688 (27 Apr 2010)	Valid
WPCO	Discharge License	WT00007442-2010 (2 Nov 2010)	Valid
WDO	Registration as Chemical Waste Producer	WPN0000-542-H3083-04	Valid
WDO	Bill Account for disposal	700945423	Valid

Legend: EIAO – Environmental Impact Assessment Ordinance  
 APCO – Air Pollution Control Ordinance

WPCO – Water Pollution Control Ordinance  
WDO – Waste Disposal Ordinance

## 6.4 Recommended Mitigation Measures

The EM&A programme followed the recommended mitigation measures in the EM&A Manual. The EM&A requirements as well as the summary of implementation status of the environmental mitigation measures are provided in **Appendix L**. In particular, the following mitigation measures were brought to attention during the site audits:

### Air Quality

- All stockpiles should be covered by tarpaulin or kept wet by water spraying;
- All vehicles should be washed to remove any dusty materials before leaving the construction sites;
- The portion of road leading the construction site that is within 30m of a designated vehicle entrance or exit should be kept clear of dusty materials;
- During the dry season, sufficient water spraying should be provided at haul road to reduce dust emission; and
- Ensure proper functioning of the wheel wash facility.

### Noise

- Mobile plant should be sited as far away from NSRs as possible;
- Plant known to emit noise strongly in one direction should be orientated to direct noise away from the NSRs; and
- The construction activities should be better scheduled to reduce noise nuisance.

### Water Quality

- Effluent should be discharged in accordance with the discharge licence conditions;
- Soil contaminated with chemicals/oils should be removed from site and the voids should be created filled with suitable materials; and
- Silt and debris should be removed from the temporary drainage channel regularly.

### Waste Management

- Reuse the excavated materials as far as practical to reduce the amount of waste disposal;
- C&D waste should be segregated and stored in different containers to other wastes to encourage the re-use or recycling of materials and their proper disposal;
- Ensure drip trays are provided for chemical containers to prevent leakage or soil contamination;
- All plants and vehicles should be properly maintained to prevent oil leakage; and
- Oil stains on soil should be cleared by disposal of contaminated soil.

# 7 Report on Non-compliance, Complaints, Notifications of Summons and Successful Prosecutions

## 7.1 Record on Non-compliance of Action and Limit Levels

There was no breach of Action or Limit Levels for Air Quality and Noise monitoring in the reporting month.

During August 2014, a number of exceedances of DO were observed at MP3 and one exceedance of SS was observed at MP4. No exceedance was observed at MP5 and MP6.

A summary is presented in **Table 7.1** below.

**Table 7.1: Summary of Exceedances in Water Quality**

Monitoring Date	pH	Dissolved Oxygen (mg/L)	Turbidity (NT)	Suspended Solids (mg/L)
<b>MP3</b>				
01/08/2014	7.5	<b>6.7</b>	25.4	21.5
04/08/2014	7.5	7.1	25.6	12
06/08/2014	7.5	<b>6.2</b>	16.9	14
08/08/2014	7.5	6.9	15.3	10.5
11/08/2014	7.4	7.2	24.8	27
13/08/2014	7.5	7.6	31.9	28
15/08/2014	7.4	7.1	15.9	17.5
18/08/2014	7.5	7.6	18.8	18
20/08/2014	7.4	7.5	25.2	22.5
22/08/2014	7.4	7.4	12.9	10.5
25/08/2014	7.5	7.6	12.9	7
27/08/2014	7.5	7.1	21.8	10.5
29/08/2014	7.5	7.3	12.2	10.5
Action Level	<5.5 or >7.5	<6.85	>64	>65
Limit Level	<4.0 or >8.0	<6.65	>67	>66
<b>MP4</b>				
01/08/2014	7.4	6.5	35.1	32
04/08/2014	7.4	5.7	31.6	23
06/08/2014	7.4	6.8	18.4	33.5
08/08/2014	7.4	6.6	17.8	19.5
11/08/2014	7.4	6.6	25.2	20.5
13/08/2014	7.4	6.8	48.6	40
15/08/2014	7.4	7.5	18.6	12.5
18/08/2014	7.4	7.1	25.5	38
20/08/2014	7.4	7.1	16.0	16.5
22/08/2014	7.4	7.6	24.8	18
25/08/2014	7.4	6.7	39.9	46
27/08/2014	7.4	7.2	32.9	21.5
29/08/2014	7.4	7.2	15.4	32
Action Level	<5.5 or >7.5	<3.91	>60	>50
Limit Level	<4.0 or >8.0	<3.82	>64	>53



### **7.3 Record on Notifications of Summons and Successful Prosecution**

No notifications of summons or successful prosecution were received the reporting month.

### **7.4 Review of Reasons for and Implications of Non-compliance, Complaints, Summons and Prosecutions**

#### Non-compliance

Investigations have been carried out to identify the causes of water quality exceedance.

From investigation, construction activities during the period of exceedance included mainly site formation and foundation work, as well as pond drainage management in the Wetland Restoration Area (to lower the water level and remove unwanted species in the pond). It was observed that the Contractor has implemented water quality mitigation measures as recommended in the EIA report, including the provision of temporary drainage facility and associated treatment facility. Sand bags are in place in the temporary drainage channel to enhance the desilting efficiency. The Contractor further enhanced the water quality mitigation measures by erecting several segments of rock bunds and installing a barrier at the discharge outlet to desilt and divert site runoff to sedimentation tanks and wastewater treatment facilities (Aquased), which will ensure all site runoff is treated to satisfactory quality before discharging into the northern ditches. With external factors affecting the adjacent environments, such as natural variations, pond fish culture activities and rainfall, the exceedances were considered not due to Project construction works.

#### Complaints, Summons and Prosecutions

Not applicable for this reporting month.

### **7.5 Follow-up Actions Taken**

#### Non-compliance

As non-compliances have been recorded, the Event and Action Plan has been followed. Although it is considered that the exceedances were not related to the Project, the Contractor was reminded to implement the water quality mitigation measures in accordance with the recommendation stated in Section 5.6.1 – 5.6.4 of the EIA Report as far as practicable and regular spot check would be conducted on the nearby discharge by Contractor and inform ET for investigation.

To cater for the site runoff in wet season, the Contractor has further enhanced the water quality mitigation measures by erecting several segments of rock bunds and installing a barrier at the discharge outlet to desilt and divert site runoff to sedimentation tanks and wastewater treatment facilities (Aquased), which will ensure all site runoff is treated to satisfactory quality before discharging into the northern ditches.



## 7.6 Cumulative Statistics for Complaints, Notifications of Summons and Successful Prosecutions

Cumulative statistics for complaints, notifications of summons and successful prosecutions for the Project account for period starting from the date of commencement of construction (i.e. 12 May 2010) to the end of the reporting month and are summarized in the **Table 7.2** below.

Table 7.2: Statistics for Complaints, Notifications of Summons and Successful Prosecutions

Reporting Period	Cumulative Statistics		
	Complaints	Notifications of summons	Successful prosecutions
This reporting month (August 2014)	0	0	0
From 12 May 2010 to end of the reporting month (August 2014)	8	0	0

## 8 Future Key Issues

### 8.1 Site Preparatory Works and Construction Works for the Coming Month

The major site works to be commissioned in the coming month include:

- Site formation
- Foundation work
- Pond drainage management (to lower the water level and remove unwanted species in the pond)

### 8.2 Key Issues for the Coming Months

Key issues to be considered in the coming three months include:

- Generation of dust from activities on-site during dry weather conditions;
- Noise impact from operating equipment and machinery on-site;
- Generation and treatment of site surface runoffs and wastewater from activities on-site and during wet weather conditions;
- Sorting, recycling, storage and disposal of general refuse and construction waste from activities on-site; and
- Management of chemicals and avoidance of oil spillage on-site and to the drainage.

### 8.3 Monitoring Schedule for the Coming Month

The environmental site inspection and environmental monitoring will be continued in the coming month. Impact monitoring for air, noise, water quality, ecology and landscape and visual in accordance with the approved EM&A Manual has commenced since 12 May 2010. The tentative monitoring schedule for September 2014 is shown in the **Table 8.1**.

Table 8.1: Tentative Environmental Monitoring and Audit Schedule for September 2014

Tentative Environmental Monitoring and Audit Schedule for Sep 2014						
Sun	Mon	Tue	Wed	Thu	Fri	Sat
	1 Water	2 <b>Bird</b> *	3 Water	4 24-hr TSP 1-hr TSP Noise Monitoring	5 Water	6
7	8 Water	9 The day after Mid-Autumn Festival	10 Water <b>Bird</b> <b>Dragonfly &amp; Butterfly</b> 24-hr TSP 1-hr TSP Noise Monitoring *	11 <b>Landscape</b>	12 Water @	13
14	15 Water	16 <b>Bird</b> 24-hr TSP 1-hr TSP Noise Monitoring *	17 Water	18	19 Water	20
21	22 Water 24-hr TSP 1-hr TSP Noise Monitoring	23 <b>Bird</b> *	24 Water	25	26 Water 24-hr TSP 1-hr TSP Noise Monitoring <b>Landscape</b>	27
28	29 Water	30 Water Bird/Water Quality Monitoring <b>Herpetofauna</b> 24-hr TSP 1-hr TSP Noise Monitoring *				

\* Site Audit by Mott MacDonald (MM)

Ecological Surveys & Landscape Audits indicated in **bold font**

@ Report Submission (Monthly EM&A Report)

## 8.4 Conclusions and Recommendations

### 8.4.1 Conclusions

The EM&A programme as recommended in the EM&A manual has been undertaken in the reporting month since 12 May 2010.

Monitoring of Air Quality, Noise, Water Quality, Ecology and Landscape and Visual impacts due to the Project was under way. In particular, the 1-hr TSP, 24-hr TSP, noise level (as  $L_{eq}$ ) and water quality parameters (such as pH, DO, turbidity and SS) under monitoring have been checked against established Action and Limit levels.

There was no breach of Action or Limit levels for Air Quality (1-hr TSP and 24-hr TSP) and Noise level (as  $L_{eq}$ ) in the reporting month.

During August 2014, two exceedances of DO were observed at MP3. No exceedance was observed at MP4, MP5 and MP6.

#### **8.4.2 Recommendations**

With considerations on the construction activities and environment, the following recommendations were provided:

##### **Air Quality**

- All stockpiles should be covered by tarpaulin or kept wet by water spraying;
- All vehicles should be washed to remove any dusty materials before leaving the construction sites;
- The portion of road leading the construction site that is within 30m of a designated vehicle entrance or exit should be kept clear of dusty materials;
- During the dry season, sufficient water spraying should be provided at haul road to reduce dust emission; and
- Ensure proper functioning of the wheel wash facility.

##### **Noise**

- Mobile plant should be sited as far away from NSRs as possible;
- Plant known to emit noise strongly in one direction should be orientated to direct noise away from the NSRs; and
- The construction activities should be better scheduled to reduce noise nuisance.


##### **Water Quality**

- Effluent should be discharged in accordance with the discharge licence conditions;
- Soil contaminated with chemicals/oils should be removed from site and the voids should be created filled with suitable materials; and
- Silt and debris should be removed from the temporary drainage channel regularly.

##### **Waste Management**

- Reuse the excavated materials as far as practical to reduce the amount of waste disposal;
- C&D waste should be segregated and stored in different containers to other wastes to encourage the re-use or recycling of materials and their proper disposal;

- Ensure drip trays are provided for chemical containers to prevent leakage or soil contamination;
- All plants and vehicles should be properly maintained to prevent oil leakage; and
- Oil stains on soil should be cleared by disposal of contaminated soil.

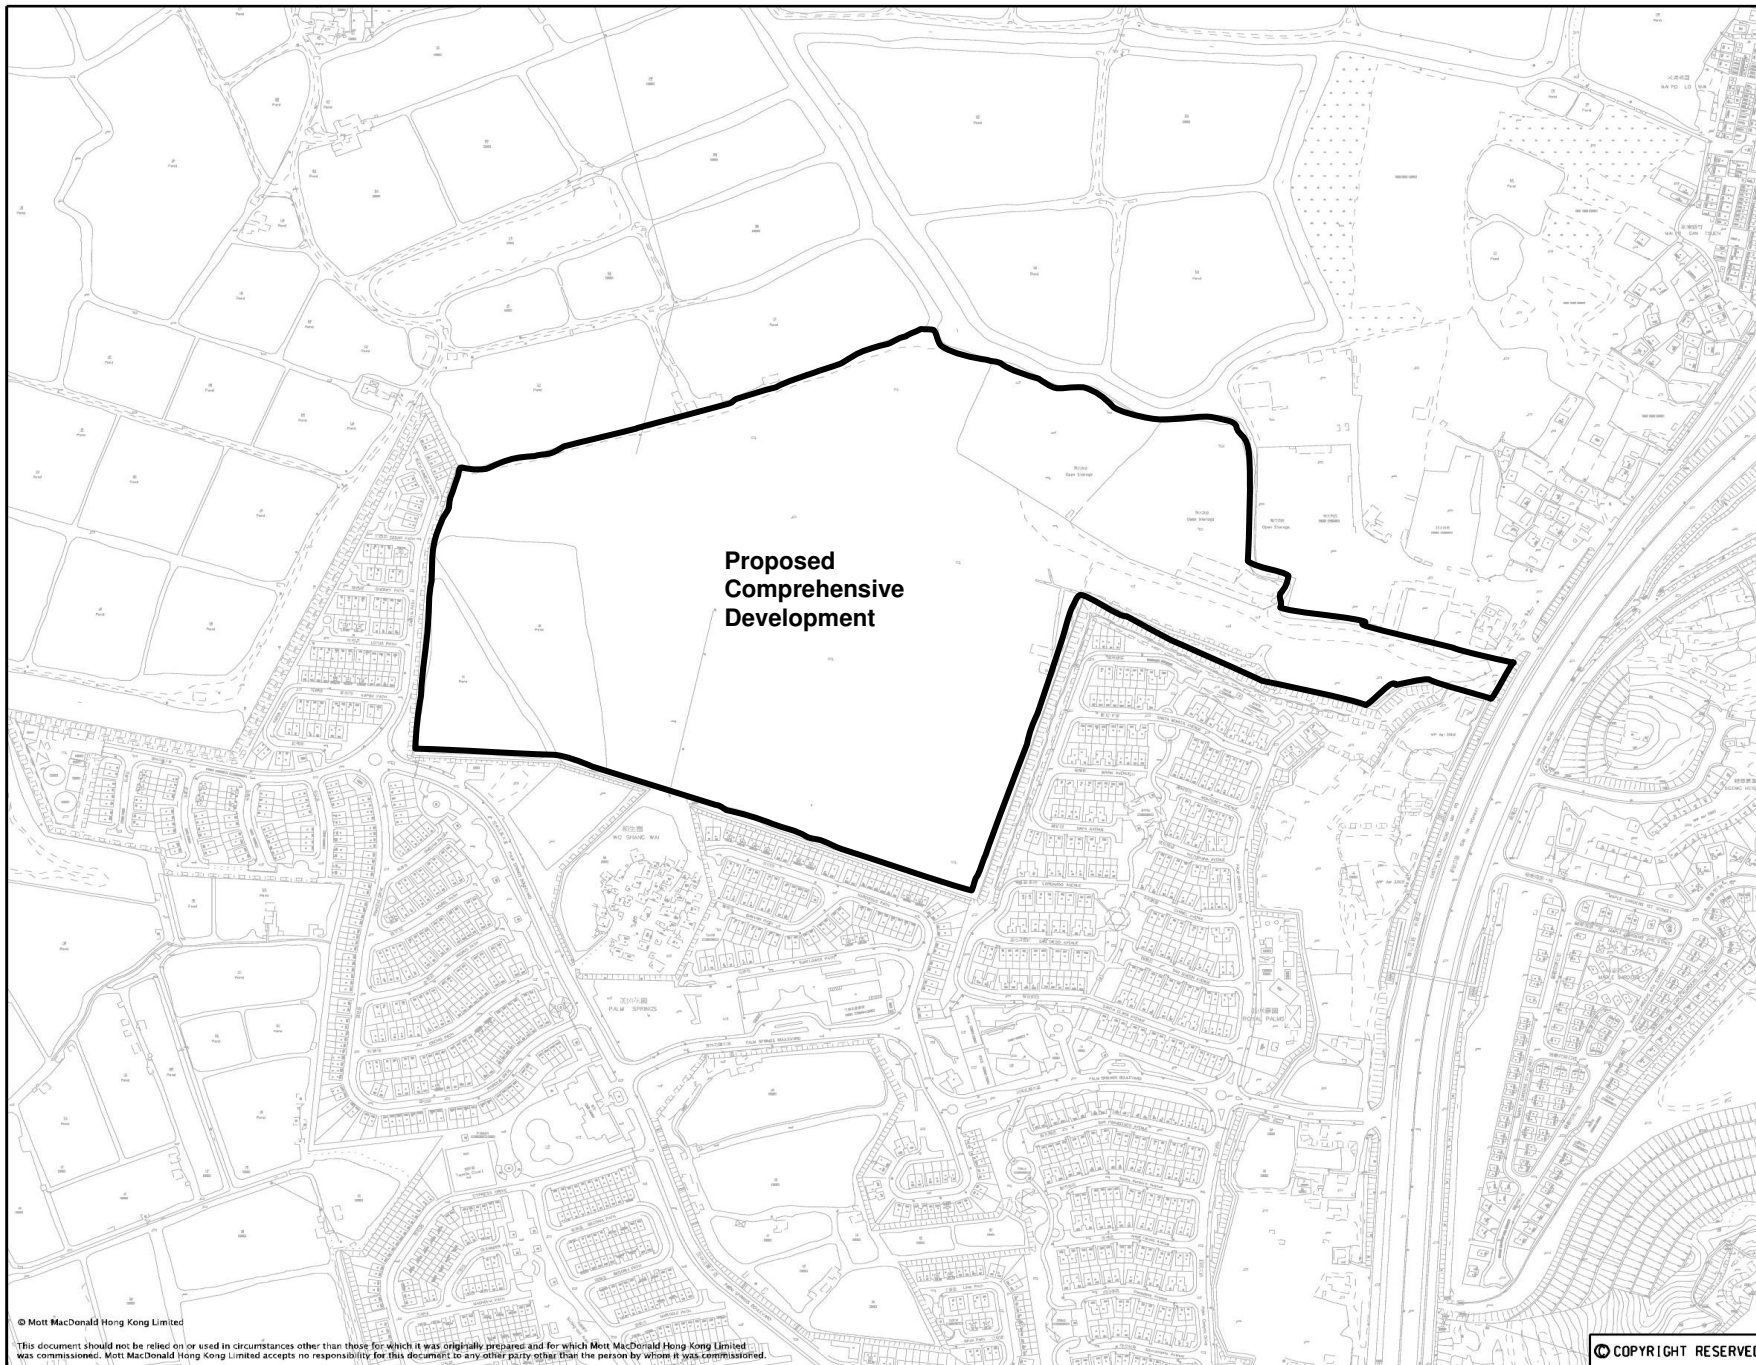

Legend:  
 — Site Boundary

**Proposed  
 Comprehensive  
 Development**

Rev	Date	Drawn	Description	Chk'd	App'd



**Mott MacDonald**  
 Mott MacDonald Hong Kong Ltd  
 7th Floor  
 New World Centre  
 23 Salisbury Road  
 Tsim Sha Tsui, Kowloon  
 Hong Kong  
 Tel: 2626 5757  
 Fax: 2827 1823  
 Web: www.mottmac.com.hk

Client:  
**HENG SHUNG CONSTRUCTION CO. LTD**

Project:  
**PROPOSED COMPREHENSIVE DEVELOPMENT AT  
 WO SHANG WAI, YUEN LONG**

Title:  
**General Layout Plan of the  
 Project Site**

Designed		Eng Chk.	
Drawn		Coordination	
Dwg Chk.		Approved	
Scale		Project	Status
		CAD File	
Drawing No.	JA22009-DEP01\ENR\CHINA\manus\080301\080301.dwg		Rev

© Mott MacDonald Hong Kong Limited  
 This document should not be relied on or used in circumstances other than those for which it was originally prepared and for which Mott MacDonald Hong Kong Limited was commissioned. Mott MacDonald Hong Kong Limited accepts no responsibility for this document to any other party other than the person to whom it was commissioned.

© COPYRIGHT RESERVED

Figure 1.1





Legend:

- ★ Construction Phase
- Air Quality
- Monitoring Locations

Rev	Date	Drawn/Description	Checked/Approved
-----	------	-------------------	------------------



Mott MacDonald Hong Kong Ltd  
 25/F, AIA Rowland Tower  
 Landmark East  
 100 How Ming Street  
 Huen Tong, Kowloon  
 Hong Kong  
 Tel: 8528 5157  
 Fax: 8527 1823  
 Web: www.mottmac.com.hk

Client:  
**HENG SHUNG CONSTRUCTION CO. LTD**

Project:  
**PROPOSED COMPREHENSIVE DEVELOPMENT  
 AT WO SHANG WAI, YUEN LONG**

Title:  
**Locations of Air Quality  
 Monitoring Stations**

Designed		Eng. Chk.	
Drawn		Coordination	
Dwg. Chk.		Approved	
Scale	Project	Status	
	CAD File		
	ak22005\VEP01\YUENLONG\AIA_mottmac\000001.dwg		
Drawing No.		Rev.	

© Mott MacDonald Hong Kong Limited

This document should not be relied on or used in circumstances other than those for which it was originally prepared and for which Mott MacDonald Hong Kong Limited was commissioned. Mott MacDonald Hong Kong Limited accepts no responsibility for this document to any other party other than the person by whom it was commissioned.

© COPYRIGHT RESERVED

Figure 2.1





Legend:

- Construction Phase
- Noise Monitoring Stations

Rev	Date	Drawn/Description	Checked/Approved
-----	------	-------------------	------------------



Mott MacDonald Hong Kong Ltd  
 20/F, AIA Rowland Tower  
 Landmark East  
 100 How Ming Street  
 Huen Tong, Kowloon  
 Hong Kong  
 Tel: 8528 5757  
 Fax: 8527 1823  
 Web: www.mottmac.com.hk

Client:  
**HENG SHUNG CONSTRUCTION CO. LTD**

Project:  
**PROPOSED COMPREHENSIVE DEVELOPMENT  
 AT WO SHANG WAI, YUEN LONG**

Title:  
**Locations of Noise  
 Monitoring Stations**



Designed		Eng. Chk.	
Drawn		Coordination	
Dwg. Chk.		Approved	
Scale	Project	Status	
	CAD File		
	ak22005-VLP011-VMP-018A-nono01000001-000000.dgn		

Drawing No. **Figure 2.2** Rev








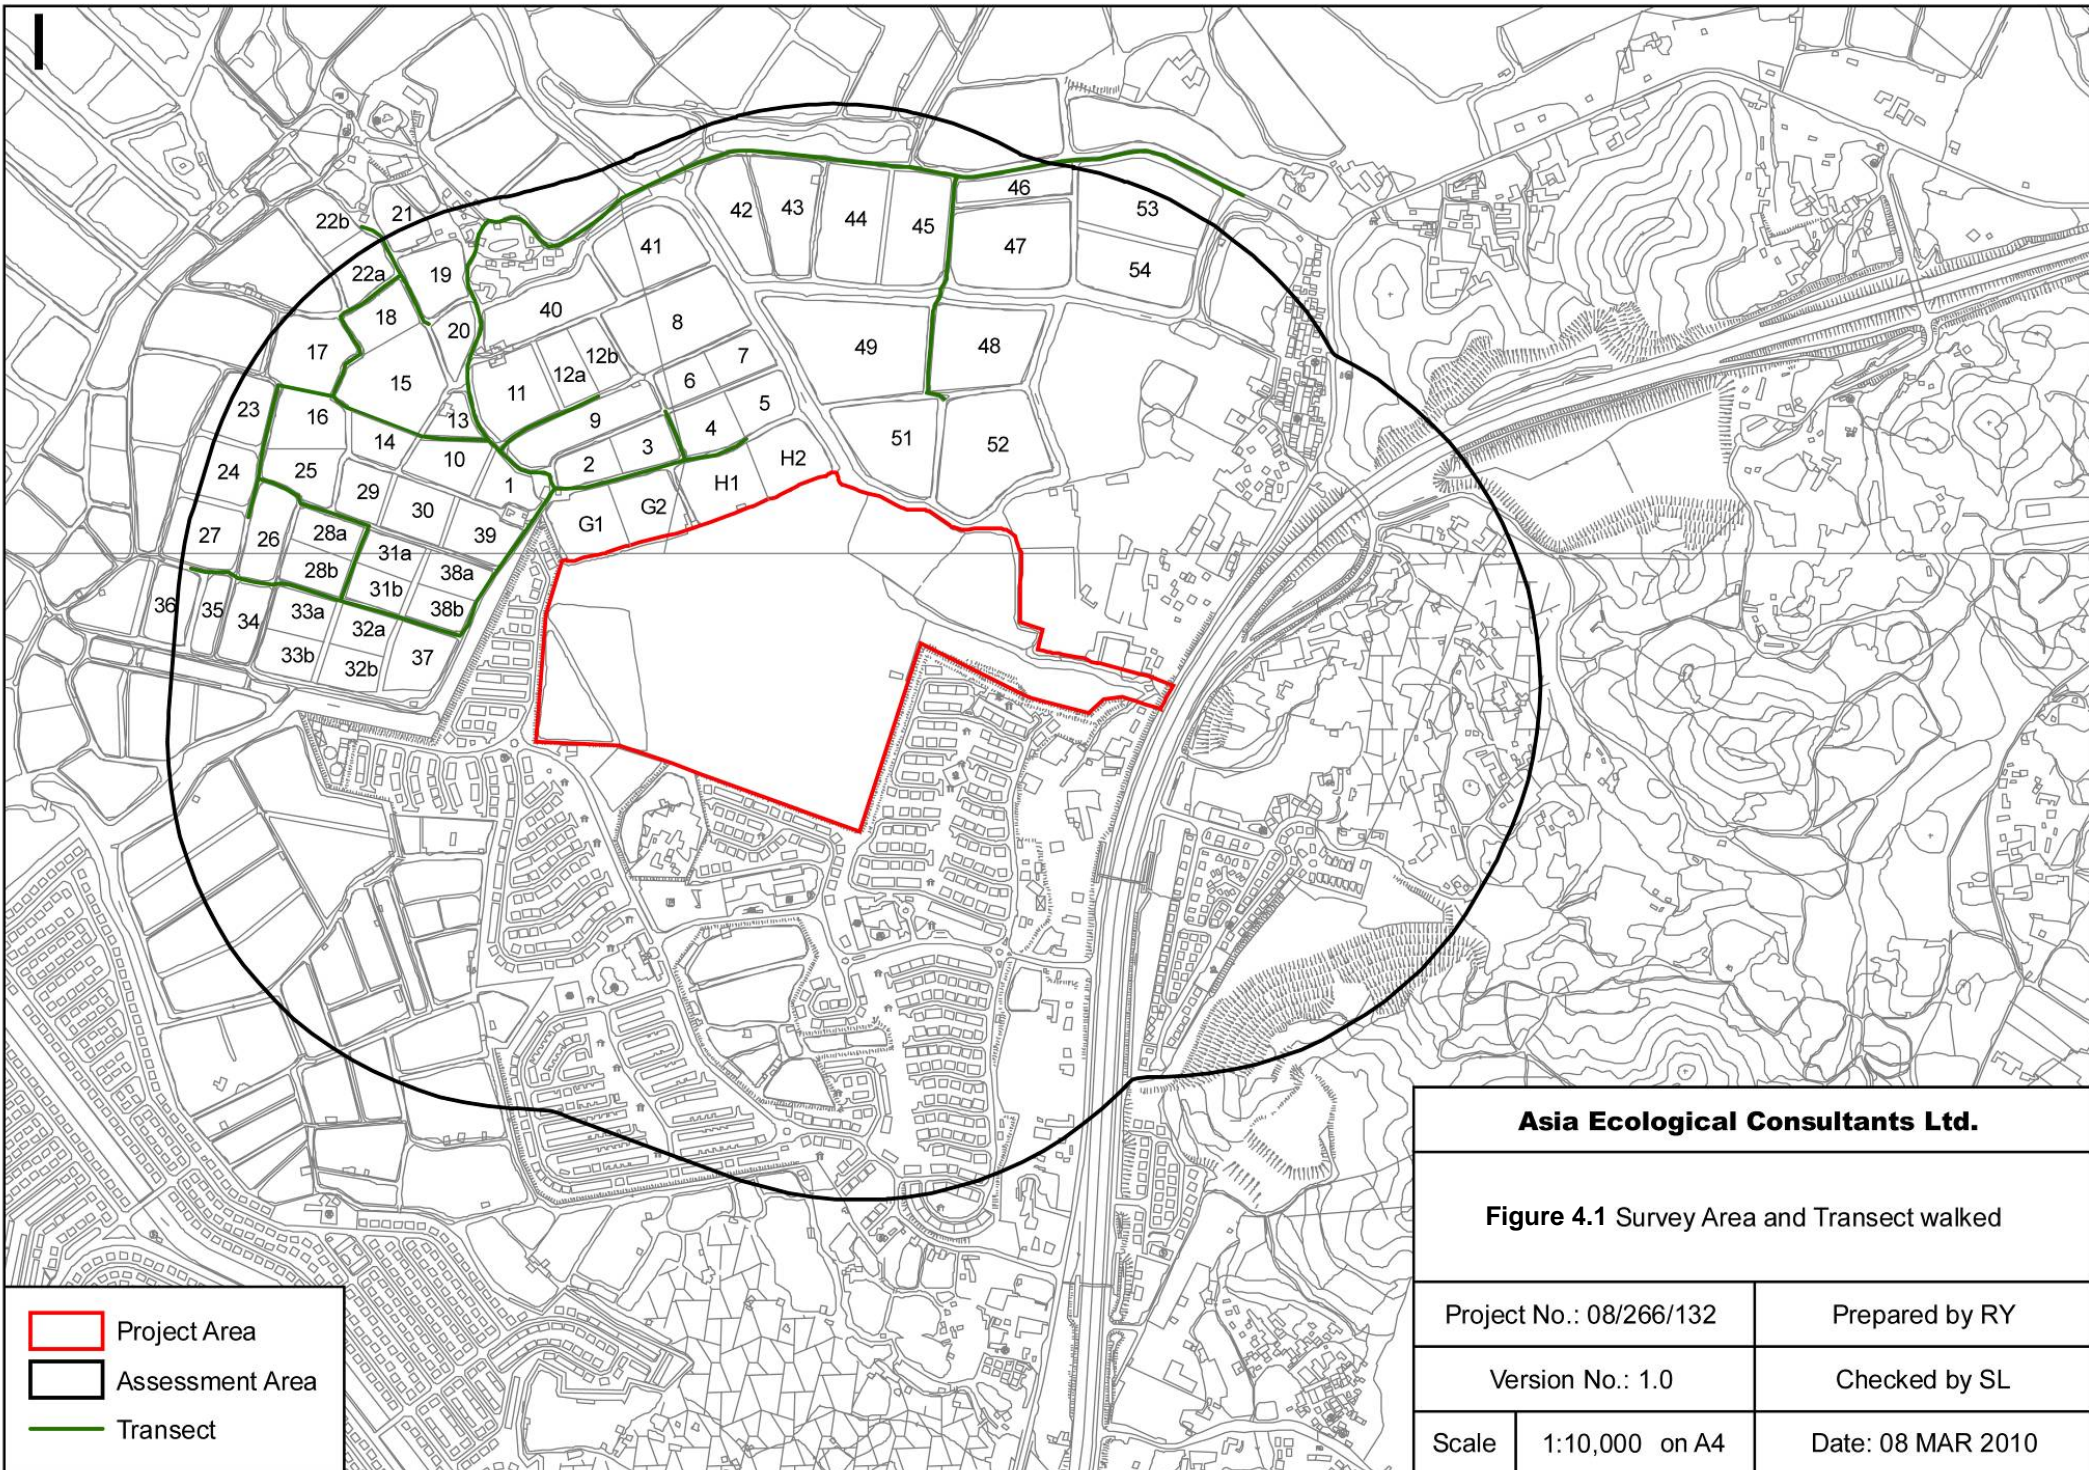

<b>Asia Ecological Consultants Ltd.</b>		
<b>Figure 4.1 Survey Area and Transect walked</b>		
Project No.: 08/266/132		Prepared by RY
Version No.: 1.0		Checked by SL
Scale	1:10,000 on A4	Date: 08 MAR 2010



## Appendix A. Project Organization Chart

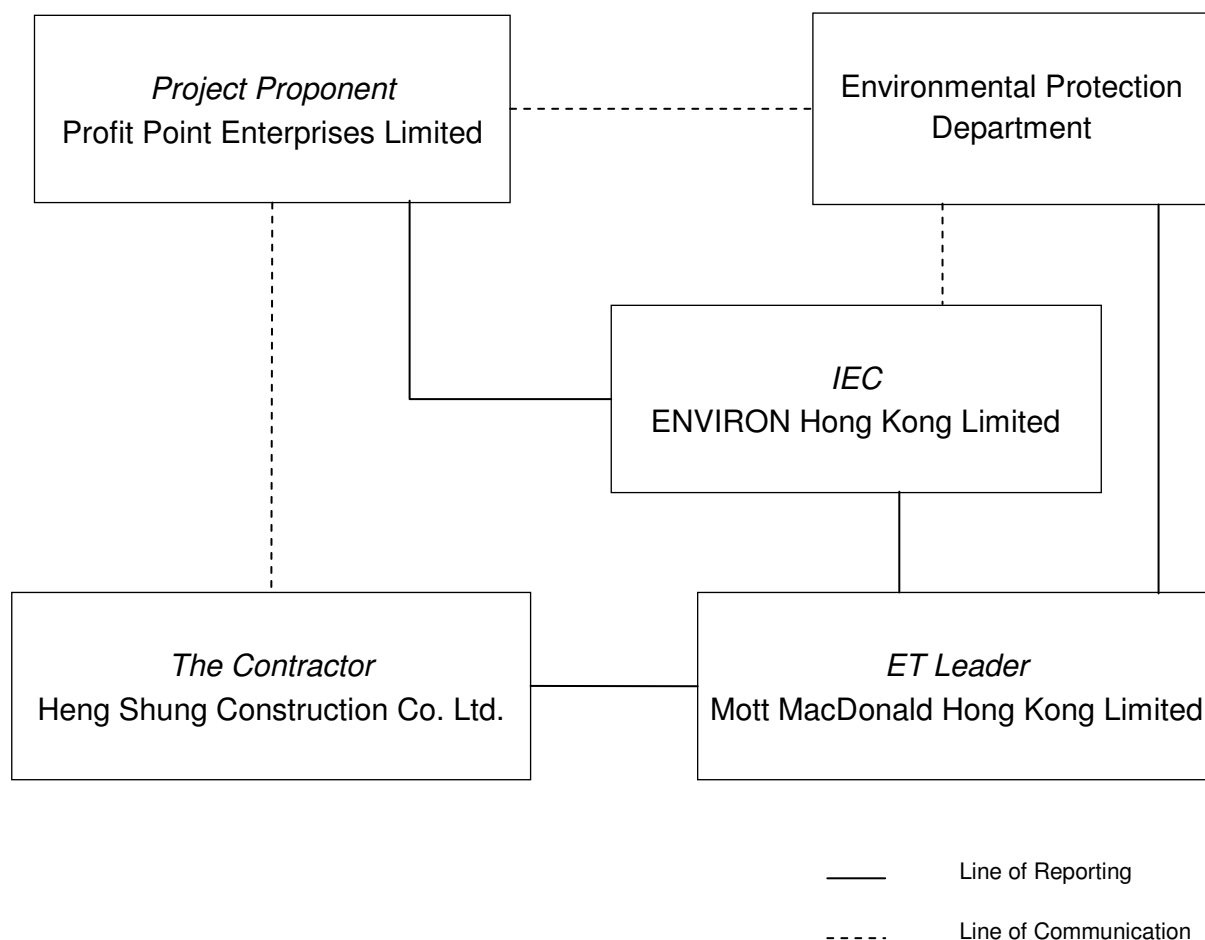

### Contact information:

Company	Position	Name	Telephone
Profit Point Enterprises Limited (Project Proponent)	Project Manager	Mr. Kelvin LAU	2908 8114
Heng Shung Construction Co. Ltd. (The Contractor)	Assistant Construction Manager	Ms. Lynne HUNG	2908 2391
	Site Agent	Mr. MOK Wing Hong	9866 7683
	Environmental Officer	Mr. Ricky WONG	9866 7625
ENVIRON Hong Kong Ltd. (Independent Environmental Checker (IEC))	Independent Environmental Checker	Mr. David YEUNG	3743 0788
Mott MacDonald Hong Kong Ltd. (Environmental Team (ET))	Environmental Team Leader	Mr. Terence KONG	2828 5919





## Appendix B. Tentative Construction Programme

## Wo Shang Wai Construction Works Programme (Phase I) (except TOA)

ID	Task Name	Working	Start	Finish	2010				2011				2012				2013				2014				2015				2016				2017			
					Q4	Q1	Q2	Q3	Q4	Q1	Q2	Q3	Q4	Q1	Q2	Q3	Q4	Q1	Q2	Q3	Q4	Q1	Q2	Q3	Q4	Q1	Q2	Q3	Q4	Q1	Q2	Q3	Q4	Q1	Q2	Q3
0	<b>Wo Shang Wai Construction Phase</b>	<b>2209 days</b>	<b>Wed 13/01/10</b>	<b>Fri 31/03/17</b>																																
1	Noise Barrier	85 days	Wed 13/01/10	Sat 24/04/10																																
2	WRA Site Formation Works	168 days	Mon 26/04/10	Mon 15/11/10																																
3	Install Band Drain	456 days	Thu 17/06/10	Sat 31/12/11																																
4	Trial Embankment	600 days	Thu 17/06/10	Sat 30/06/12																																
5	Site Formation	1214 days	Mon 03/01/11	Wed 31/12/14																																
6	Foundation Work	392 days	Wed 01/10/14	Thu 31/12/15																																
7	Superstructure	418 days	Mon 02/03/15	Thu 30/06/16																																
8	Finishing	549 days	Wed 01/07/15	Fri 31/03/17																																

Project : Wo Shang Wai  
 Revision : I  
 Print Date : Thu 11/09/14

Task Milestone Summary





## Appendix C. Action and Limit Levels for Construction Phase

### Air Quality

#### Action and Limit Levels for 24-hour TSP

Monitoring Station	Action Level ( $\mu\text{g}/\text{m}^3$ )	Limit Level ( $\mu\text{g}/\text{m}^3$ )
ASR1	226	260
ASR2A	213	260
ASR3	205	260
ASR4	237	260

#### Action and Limit Levels for 1-hour TSP

Monitoring Station	Action Level ( $\mu\text{g}/\text{m}^3$ )	Limit Level ( $\mu\text{g}/\text{m}^3$ )
ASR1	378	500
ASR2A	357	500
ASR3	358	500
ASR4	372	500

### Noise

#### Action and Limit Levels for Construction Noise

Time Period	Action Level	Limit Level
<b>NSR1, NSR3, NSR5, NSR7</b>		
0700 – 1900 hours on normal weekdays	When one documented complaint is received from any one of the sensitive receivers	75 dB(A)

### Water Quality

#### Action and Limit Levels for Water Quality

Parameters	DO in mg/L		Turbidity in NTU		SS in mg/L		pH	
	Action Level	Limit Level	Action Level	Action Level	Action Level	Limit Level	Action Level	Limit Level
MP1	1.23	1.17	173	177	231	299	< 5.5 or > 7.5	< 4.0 or > 8.0
MP2	1.04	0.89	132	163	170	209		
MP3	6.85	6.65	64	67	65	66		
MP4	3.91	3.82	60	64	50	53		
MP5	4.13	3.87	81	84	66	69		
MP6	4.61	4.52	94	96	75	75		



# Appendix D. Event and Action Plan for Air Quality, Noise, Water Quality, Ecology and Landscape & Visual

## Air Quality

Event	Action ET Leader	IEC	ER	Contractor
<b>Action Level</b>				
<b>1. Exceedance for one sample</b>	<ol style="list-style-type: none"> <li>1. Identify source, investigate the causes of exceedance and propose remedial measures.</li> <li>2. Inform IEC and ER.</li> <li>3. Repeat measurement to confirm finding.</li> <li>4. Increase monitoring frequency to daily.</li> </ol>	<ol style="list-style-type: none"> <li>1. Check monitoring data submitted by ET.</li> <li>2. Check Contractor's working method.</li> </ol>	<ol style="list-style-type: none"> <li>1. Notify Contractor.</li> </ol>	<ol style="list-style-type: none"> <li>1. Rectify any unacceptable practice.</li> <li>2. Amend working methods if appropriate.</li> </ol>
<b>2. Exceedance for two or more consecutive samples</b>	<ol style="list-style-type: none"> <li>1. Identify the source.</li> <li>2. Inform IEC and ER.</li> <li>3. Advise ER on the effectiveness of the proposed remedial measures</li> <li>4. Repeat measurements to confirm findings.</li> <li>5. Increase monitoring frequency to daily.</li> <li>6. Discuss with IEC and the Contractor on remedial actions required.</li> <li>7. If exceedance continues, arrange meeting with IEC and ER.</li> <li>8. If exceedance stops, cease additional monitoring.</li> </ol>	<ol style="list-style-type: none"> <li>1. Check monitoring data submitted by ET.</li> <li>2. Check the Contractor's working method.</li> <li>3. Discuss with ET Leader and the Contractor on possible remedial measures.</li> <li>4. Advise ER on the effectiveness of the proposed remedial measures.</li> <li>5. Supervise implementation of remedial measures.</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm receipt of notification of exceedance in writing.</li> <li>2. Notify the Contractor.</li> <li>3. Ensure remedial measures properly implemented.</li> </ol>	<ol style="list-style-type: none"> <li>1. Submit proposals for remedial actions to IEC within 3 working days of notification.</li> <li>2. Implement the agreed proposals.</li> <li>3. Amend proposal if appropriate.</li> </ol>
<b>Limit Level</b>				
<b>1. Exceedance for one sample</b>	<ol style="list-style-type: none"> <li>1. Identify source, investigate the causes of exceedance and propose remedial measures.</li> <li>2. Inform ER and EPD.</li> <li>3. Repeat measurement to confirm finding.</li> <li>4. Increase monitoring frequency to daily.</li> <li>5. Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results.</li> </ol>	<ol style="list-style-type: none"> <li>1. Check monitoring data submitted by ET.</li> <li>2. Check the Contractor's working method.</li> <li>3. Discuss with ET Leader and the Contractor on possible remedial measures.</li> <li>4. Advise ER on the effectiveness of the proposed remedial measures.</li> <li>5. Supervise implementation of remedial measures.</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm receipt of notification of exceedance in writing.</li> <li>2. Notify the Contractor.</li> <li>3. Ensure remedial measures properly implemented.</li> </ol>	<ol style="list-style-type: none"> <li>1. Take immediate action to avoid further exceedance.</li> <li>2. Submit proposals for remedial actions to IEC within 3 working days of notification.</li> <li>3. Implement the agreed proposals.</li> <li>4. Amend proposal if appropriate.</li> </ol>

Event	Action ET Leader	IEC	ER	Contractor
<b>2. Exceedance for two or more consecutive samples</b>	<ol style="list-style-type: none"> <li>1. Notify IEC, ER, EPD and the Contractor.</li> <li>2. Identify the source.</li> <li>3. Repeat measurements to confirm findings.</li> <li>4. Increase monitoring frequency to daily.</li> <li>5. Carry out analysis of the Contractor's working procedures to determine possible mitigation to be implemented.</li> <li>6. Arrange meeting IEC and ER to discuss the remedial actions to be taken.</li> <li>7. Assess effectiveness of the Contractor's remedial actions and keep IEC, EPD and ER informed of the results.</li> <li>8. If exceedance stops, cease additional monitoring.</li> </ol>	<ol style="list-style-type: none"> <li>1. Discuss amongst ER, ET Leader and the Contractor on the potential remedial actions.</li> <li>2. Review the Contractor's remedial actions whenever necessary and advise ER accordingly.</li> <li>3. Supervise the implementation of remedial measures.</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm receipt of notification of exceedance in writing.</li> <li>2. Notify the Contractor.</li> <li>3. In consultation with IEC, agree with the remedial measures to be implemented.</li> <li>4. Ensure remedial measures are properly implemented.</li> <li>5. If exceedance continues, consider what activity of the work is responsible and instruct the Contractor to stop that activity of work until the exceedance is abated.</li> </ol>	<ol style="list-style-type: none"> <li>1. Take immediate action to avoid further exceedance.</li> <li>2. Submit proposals for remedial actions to IEC within 3 working days of notification.</li> <li>3. Implement the agreed proposals.</li> <li>4. Resubmit proposals if problem still not under control.</li> <li>5. Stop the relevant activity of works as determined by ER until the exceedance is abated.</li> </ol>

Construction Noise

Event	Action	IEC	ER	Contractor
	ET Leader			
<b>Action Level</b>	<ol style="list-style-type: none"> <li>1. Notify IEC and the Contractor.</li> <li>2. Carry out investigation.</li> <li>3. Report the results of investigation to IEC and the Contractor.</li> <li>4. Discuss with the Contractor and formulate remedial measures.</li> <li>5. Increase monitoring frequency to check mitigation measures.</li> </ol>	<ol style="list-style-type: none"> <li>1. Review with analysed results submitted by ET.</li> <li>2. Review the proposed remedial measures by the Contractor and advise ER accordingly.</li> <li>3. Supervise the implement of remedial measures.</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm receipt of notification of exceedance in writing.</li> <li>2. Notify the Contractor.</li> <li>3. Require the Contractor to propose remedial measures for the analysed noise problem.</li> <li>4. Ensure remedial measures are properly implemented.</li> </ol>	<ol style="list-style-type: none"> <li>1. Submit noise mitigation proposals to IEC.</li> <li>2. Implement noise mitigation proposals.</li> </ol>
<b>Limit Level</b>	<ol style="list-style-type: none"> <li>1. Identify the source.</li> <li>2. Notify IEC, ER, EPD and the Contractor.</li> <li>3. Repeat measurement to confirm findings.</li> <li>4. Increase monitoring frequency.</li> <li>5. Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented.</li> <li>6. Inform IEC, ER, and EPD the causes &amp; actions taken for the exceedances.</li> <li>7. Assess effectiveness of the Contractor's remedial actions and keep IEC, EPD and ER informed of the results.</li> <li>8. If exceedance stops, cease additional monitoring.</li> </ol>	<ol style="list-style-type: none"> <li>1. Discuss amongst ER, ET Leader and the Contractor on the potential remedial actions.</li> <li>2. Review the Contractor's remedial actions whenever necessary to assure their effectiveness and advise ER accordingly.</li> <li>3. Supervise the implementation of remedial measures.</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm receipt of notification of exceedance in writing.</li> <li>2. Notify the Contractor.</li> <li>3. Require the Contractor to propose remedial measures for the analysed noise problem.</li> <li>4. Ensure remedial measures are properly implemented.</li> <li>5. If exceedance continues, consider what activity of the work is responsible and instruct the Contractor to stop that activity of work until the exceedance is abated.</li> </ol>	<ol style="list-style-type: none"> <li>1. Take immediate action to avoid further exceedance.</li> <li>2. Submit proposals for remedial actions to IEC within 3 working days of notification.</li> <li>3. Implement the agreed proposals.</li> <li>4. Resubmit proposals if problem still not under control.</li> <li>5. Stop the relevant activity of works as determined by the ER until the exceedance is abated.</li> </ol>

Water Quality

Event	Action ET Leader	IEC	ER	Contractor
<b>Action Level</b>				
<b>1. Exceedance for one sample</b>	1. Repeat in-situ measurement to confirm finding; 2. Identify source(s) of impact; 3. Inform IEC and Contractor; 4. Check monitoring data, all plant, equipment and Contractor's working methods; 5. Discuss mitigation measures with IEC and Contractor; and 6. Repeat measurement on next day of exceedance.	1. Discuss with ET and Contractor on the mitigation measures; 2. Review proposals on mitigation measures submitted by Contractor and advise the ER accordingly; and 3. Assess the effectiveness of the implemented mitigation measures.	1. Discuss with IEC on the proposed mitigation measures; and 2. Make agreement on the mitigation measures to be implemented.	1. Inform the ER and confirm notification of the non-compliance in writing; 2. Rectify unacceptable practice; 3. Check all plant and equipment; 4. Consider changes of working methods; 5. Discuss with ET and IEC and propose mitigation measures to IEC and ER; and 6. Implement the agreed mitigation measures.
<b>2. Exceedance for two or more consecutive samples</b>	1. Repeat in-situ measurement to confirm finding; 2. Identify source(s) of impact; 3. Inform IEC and Contractor; 4. Check monitoring data, all plant, equipment and Contractor's working methods; 5. Discuss mitigation measures with IEC and Contractor; 6. Ensure mitigation measures are implemented; 7. Prepare to increase the monitoring frequency to daily; and 8. Repeat measurement on next day of exceedance.	1. Discuss with ET and Contractor on the mitigation measures; 2. Review proposals on mitigation measures submitted by Contractor and advise the ER accordingly; and 3. Assess the effectiveness of the implemented mitigation measures.	1. Discuss with IEC on the proposed mitigation measures; 2. Make agreement on the mitigation measures to be implemented; and 3. Assess the effectiveness of the implemented mitigation measures.	1. Inform the Engineer and confirm notification of the non-compliance in writing; 2. Rectify unacceptable practice; 3. Check all plant and equipment; 4. Consider changes of working methods; 5. Discuss with ET and IEC and propose mitigation measures to IEC and ER within 3 working days; and 6. Implement the agreed mitigation measures.
<b>Limit Level</b>				
<b>1. Exceedance for one sample</b>	1. Repeat in-situ measurement to confirm finding; 2. Identify source(s) of impact;	1. Discuss with ET and Contractor on the mitigation measures; 2. Review proposals on mitigation measures	1. Discuss with IEC, ET and Contractor on the proposed mitigation measures; and	1. Inform the Engineer and confirm notification of the non-compliance in writing; 2. Rectify unacceptable

Event	Action ET Leader	IEC	ER	Contractor
	3. Inform IEC, Contractor and EPD; 4. Check monitoring data, all plant, equipment and Contractor's working methods; 5. Discuss mitigation measures with IEC, ER and Contractor; 6. Ensure mitigation measures are implemented; and 7. Increase the monitoring frequency to daily until no exceedance of Limit level.	submitted by Contractor and advise the ER accordingly; and 3. Assess the effectiveness of the implemented mitigation measures.	2. Request Contractor to critically review the working methods; 3. Make agreement on the mitigation measures to be implemented; and 4. Assess the effectiveness of the implemented mitigation measures.	practice; 3. Check all plant and equipment; 4. Consider changes of working methods; 5. Discuss with ET and IEC and ER and propose mitigation measures to IEC and ER within 3 working days; and 6. Implement the agreed mitigation measures.
<b>2. Exceedance for two or more consecutive samples</b>	1. Repeat in-situ measurement to confirm finding; 2. Identify source(s) of impact; 3. Inform IEC, Contractor and EPD; 4. Check monitoring data, all plant, equipment and Contractor's working methods; 5. Discuss mitigation measures with IEC, ER and Contractor; 6. Ensure mitigation measures are implemented; and 7. Increase the monitoring frequency to daily until no exceedance of Limit level for two consecutive days.	1. Discuss with ET and Contractor on the mitigation measures; 2. Review proposals on mitigation measures submitted by Contractor and advise the ER accordingly; and 3. Assess the effectiveness of the implemented mitigation measures.	1. Discuss with IEC, ET and Contractor on the proposed mitigation measures; and 2. Request Contractor to critically review the working methods; 3. Make agreement on the mitigation measures to be implemented; 4. Assess the effectiveness of the implemented mitigation measures; and 5. Consider and instruct, if necessary, the Contractor to slow down or to stop all or part of the marine work until no exceedance of Limit Level.	1. Inform the ER and confirm notification of the non-compliance in writing; 2. Rectify unacceptable practice; 3. Check all plant and equipment; 4. Consider changes of working methods; 5. Discuss with ET and IEC and ER and propose mitigation measures to IEC and ER within 3 working days; 6. Implement the agreed mitigation measures; and 7. As directed by the Engineer, to slow down or to stop all or part of the marine work or construction activities.





## Appendix E. Calibration Certificates



Appendix E  
Calibration Record  
(Air Quality Monitoring)






# CERTIFICATE OF CALIBRATION AND TESTING

TSI Incorporated, 500 Cardigan Road, Shoreview, MN 55126 USA  
Tel: 1-800-874-2811 1-651-490-2811 Fax: 1-651-490-3824 http://www.tsi.com

Environment Condition			Model	8520
Temperature	74.7 (23.7)	°F (°C)		
Relative Humidity	22	%RH	Serial Number	85202623
Barometric Pressure	28.94 (980.0)	inHg (hPa)		

- |   |  |
|---|--|
| <input checked="" type="checkbox"/> As Left | <input checked="" type="checkbox"/> In Tolerance |
| <input type="checkbox"/> As Found           | <input type="checkbox"/> Out of Tolerance        |

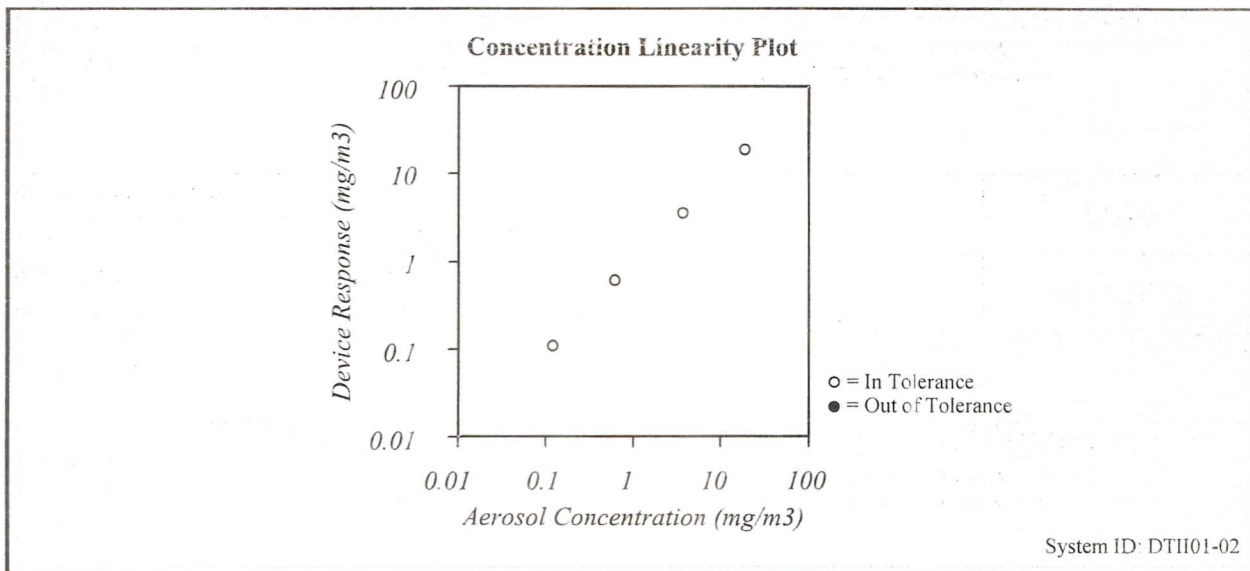

Zero Stability Results			
Average:	Minimum:	Maximum:	Time:
0.000 :mg/m <sup>3</sup>	0.000 :mg/m <sup>3</sup>	0.001 :mg/m <sup>3</sup>	2.00 :hrs.

TSI Incorporated does hereby certify that all materials, components, and workmanship used in the manufacture of this equipment are in strict accordance with the applicable specifications agreed upon by TSI and the customer and with all published specifications. All performance and acceptance tests required under this contract were successfully conducted according to required specifications. There is no NIST standard for optical mass measurements. Calibration of this instrument performed by TSI has been done using emery oil and has been nominally adjusted to respirable mass of standard ISO 12103-1, A1 test dust (Arizona dust). Our calibration ratio is greater than 1.2:1

Measurement Variable	System ID	Last Cal.	Cal. Due	Measurement Variable	System ID	Last Cal.	Cal. Due
Barometric Pressure	E003733	03-27-14	03-27-15	Temperature	E002873	11-05-13	11-05-14
Humidity	E002873	11-05-13	11-05-14	DC Voltage	E003314	01-03-14	01-03-15
DC Voltage	E003315	01-03-14	01-03-15	Photometer	E003319	02-11-14	08-11-14
Microbalance	M001324	01-04-13	01-04-15	Pressure	E003511	11-04-13	11-04-14
Flowmeter	E004025	05-06-13	05-06-14				

*Anamika Shah*  
\_\_\_\_\_  
Calibrated

Final Function  
Check

April 16, 2014  
\_\_\_\_\_  
Date






# CERTIFICATE OF CALIBRATION AND TESTING

TSI Incorporated, 500 Cardigan Road, Shoreview, MN 55126 USA  
Tel: 1-800-874-2811 1-651-490-2811 Fax: 1-651-490-3824 http://www.tsi.com

Environment Condition			Model	AM510
Temperature	74.5 (23.6)	°F (°C)	Serial Number	11108010
Relative Humidity	51	%RH		
Barometric Pressure	28.90 (978.7)	inHg (hPa)		

<input checked="" type="checkbox"/> As Left	<input checked="" type="checkbox"/> In Tolerance
<input type="checkbox"/> As Found	<input type="checkbox"/> Out of Tolerance

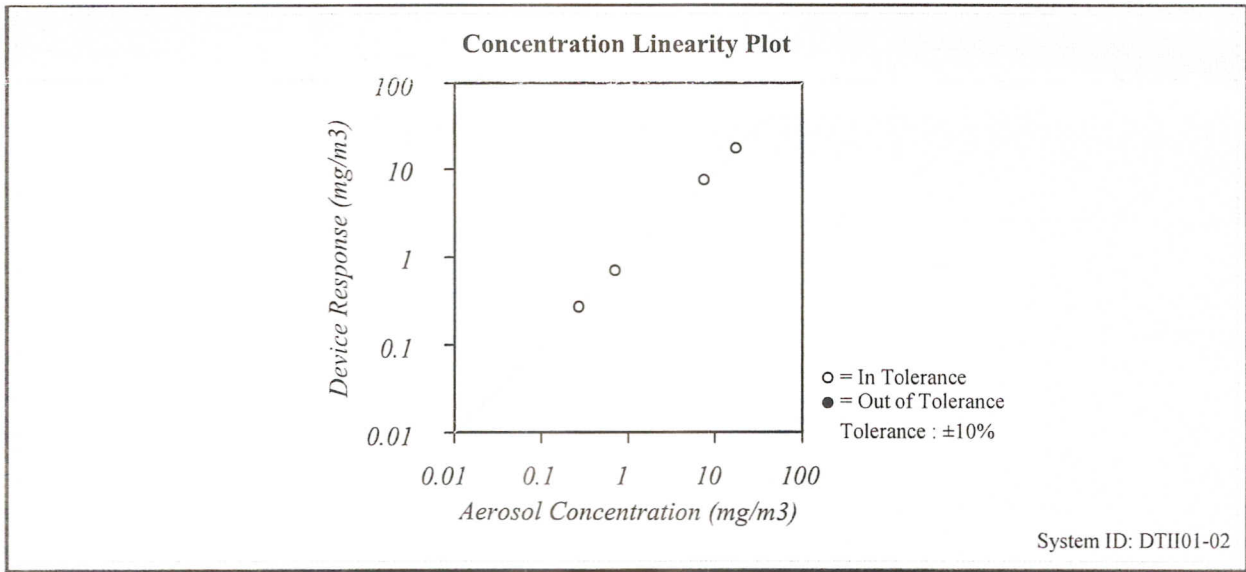

*TSI Incorporated does hereby certify that all materials, components, and workmanship used in the manufacture of this equipment are in strict accordance with the applicable specifications agreed upon by TSI and the customer and with all published specifications. All performance and acceptance tests required under this contract were successfully conducted according to required specifications. There is no NIST standard for optical mass measurements. Calibration of this instrument performed by TSI has been done using emery oil and has been nominally adjusted to respirable mass of standard ISO 12103-1, A1 test dust (Arizona dust). Our calibration ratio is greater than 1.2:1*

Measurement Variable	System ID	Last Cal.	Cal. Due	Measurement Variable	System ID	Last Cal.	Cal. Due
Barometric Pressure	E003733	03-12-13	03-12-14	Temperature	E002873	11-08-12	11-08-13
Humidity	E002873	11-08-12	11-08-13	DC Voltage	E003314	01-02-13	01-02-14
DC Voltage	E003315	01-02-13	01-02-14	Photometer	E003319	08-14-13	02-14-14
Microbalance	M001324	01-04-13	01-04-15	Pressure	E003511	11-07-12	11-07-13
Flowmeter	E002006	03-05-13	03-05-14				

*Amanda Shaw*  
Calibrated

Final Function Check

August 21, 2013  
Date

High-Volume TSP Sampler  
5-Point Calibration Record

Location : ASR2A  
Calibrated by : P.F.Yeung  
Date : 05/07/2014

Sampler

Model : GMWS-2310 ACCU-VOL  
Serial Number : S/N 1061

Calibration Orifice and Standard Calibration Relationship

Serial Number : 2454  
Service Date : 24 Mar 2014  
Slope (m) : 2.07593  
Intercept (b) : -0.00102  
Correlation Coefficient(r) : 0.99996

Standard Condition

Pstd (hpa) : 1013  
Tstd (K) : 298.18

Calibration Condition

Pa (hpa) : 1005  
Ta(K) : 305

Resistance Plate	dH [green liquid] (inch water)	Z	X=Qstd (cubic meter/min)	IC	Y
1   18 holes	11.8	3.382	1.630	51	50.21
2   13 holes	9.3	3.002	1.447	46	45.29
3   10 holes	7.0	2.605	1.255	40	39.38
4   7 holes	4.4	2.065	0.995	34	33.47
5   5 holes	2.7	1.618	0.780	28	27.57

Sampler Calibration Relationship

Slope(m):26.478 Intercept(b):6.846 Correlation Coefficient(r):0.9990

Checked by: Magnum Fan

Date: 11/07/2014

High-Volume TSP Sampler  
5-Point Calibration Record

Location : ASR4  
Calibrated by : P.F.Yeung  
Date : 05/07/2014

Sampler

Model : GMWS-2310 ACCU-VOL  
Serial Number : S/N 1273

Calibration Orifice and Standard Calibration Relationship

Serial Number : 2454  
Service Date : 24 Mar 2014  
Slope (m) : 2.07593  
Intercept (b) : -0.00102  
Correlation Coefficient(r) : 0.99996

Standard Condition

Pstd (hpa) : 1013  
Tstd (K) : 298.18

Calibration Condition

Pa (hpa) : 1005  
Ta(K) : 305

Resistance Plate	dH [green liquid] (inch water)	Z	X=Qstd (cubic meter/min)	IC	Y
1   18 holes	12.1	3.425	1.650	52	51.20
2   13 holes	9.6	3.051	1.470	46	45.29
3   10 holes	7.0	2.605	1.256	40	39.38
4   7 holes	4.5	2.089	1.007	33	32.49
5   5 holes	2.7	1.618	0.780	26	25.60

Sampler Calibration Relationship

Slope(m):29.000      Intercept(b):3.052      Correlation Coefficient(r):0.9996

Checked by: Magnum Fan

Date: 11/07/2014



High-Volume TSP Sampler  
5-Point Calibration Record

Location : ASR3  
 Calibrated by : K.T.Ho  
 Date : 05/07/2014

Sampler

Model : GMWS-2310 ACCU-VOL  
 Serial Number : S/N 7577

Calibration Orifice and Standard Calibration Relationship

Serial Number : 2454  
 Service Date : 24 Mar 2014  
 Slope (m) : 2.07593  
 Intercept (b) : -0.00102  
 Correlation Coefficient(r) : 0.99996

Standard Condition

Pstd (hpa) : 1013  
 Tstd (K) : 298.18

Calibration Condition

Pa (hpa) : 1005  
 Ta(K) : 305

Resistance Plate	dH [green liquid] (inch water)	Z	X=Qstd (cubic meter/min)	IC	Y
1   18 holes	12.4	3.467	1.671	60	59.07
2   13 holes	9.7	3.066	1.478	53	52.18
3   10 holes	7.4	2.678	1.291	46	45.29
4   7 holes	4.7	2.134	1.029	38	37.41
5   5 holes	2.8	1.647	0.794	29	28.55

Sampler Calibration Relationship

Slope(m):34.382      Intercept(b):1.445      Correlation Coefficient(r):0.9995

Checked by: Magnum Fan

Date: 11/07/2014

High-Volume TSP Sampler  
5-Point Calibration Record

Location : ASR1  
Calibrated by : P.F.Yeung  
Date : 05/07/2014

Sampler

Model : GMWS-2310 ACCU-VOL  
Serial Number : S/N 1806

Calibration Office and Standard Calibration Relationship

Serial Number : 2454  
Service Date : 24 Mar 2014  
Slope (m) : 2.07593  
Intercept (b) : -0.00102  
Correlation Coefficient(r) : 0.99996

Standard Condition

Pstd (hpa) : 1013  
Tstd (K) : 298.18

Calibration Condition

Pa (hpa) : 1005  
Ta(K) : 305

Resistance Plate	dH [green liquid] (inch water)	Z	X=Qstd (cubic meter/min)	IC	Y
1   18 holes	11.4	3.324	1.602	52	51.20
2   13 holes	8.6	2.887	1.391	46	45.29
3   10 holes	6.8	2.567	1.237	41	40.37
4   7 holes	4.1	1.994	0.961	34	33.47
5   5 holes	2.7	1.618	0.780	28	27.57

Sampler Calibration Relationship

Slope(m):28.397      Intercept(b):5.668      Correlation Coefficient(r): 0.9992

Checked by: Magnum Fan

Date: 11/07/2014

Appendix E  
Calibration Record  
(Noise Monitoring)



# Certificate of Calibration

## 校正證書

Certificate No. : C137684  
證書編號

### ITEM TESTED / 送檢項目 (Job No. / 序引編號 : IC13-3109)

Description / 儀器名稱 : Sound Level Meter  
Manufacturer / 製造商 : Rion  
Model No. / 型號 : NL-52  
Serial No. / 編號 : 00710259  
Supplied By / 委託者 : Envirotech Services Co.  
Shop 6, G/F., Casio Mansion, 209 Shaukeiwan Road,  
Hong Kong

### TEST CONDITIONS / 測試條件

Temperature / 溫度 :  $(23 \pm 2)^{\circ}\text{C}$  Relative Humidity / 相對濕度 :  $(55 \pm 20)\%$   
Line Voltage / 電壓 : ---

### TEST SPECIFICATIONS / 測試規範

Calibration check

DATE OF TEST / 測試日期 : 3 December 2013


### TEST RESULTS / 測試結果

The results apply to the particular unit-under-test only.  
All results are within manufacturer's specification.  
The results are detailed in the subsequent page(s).

The test equipment used for calibration are traceable to National Standards via :

- The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory
- Rohde & Schwarz Laboratory, Germany
- Fluke Everett Service Center, USA
- Agilent Technologies, USA

Tested By  
測試

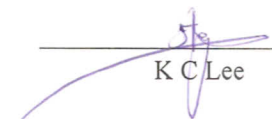:   
K C Lee

Certified By  
核證

:   
K M Wu

Date of Issue  
簽發日期

: 4 December 2013

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗室所書面批准。

# Certificate of Calibration

## 校正證書

Certificate No. : C137684  
證書編號

- The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 12 hours, and switched on to warm up for over 10 minutes before the commencement of the test.
- Self-calibration using the Rion acoustic calibrator NC-73, S/N : 10486660 was performed before the test.
- The results presented are the mean of 3 measurements at each calibration point.
- Test equipment :

Equipment ID	Description	Certificate No.
CL280	40 MHz Arbitrary Waveform Generator	C130019
CL281	Multifunction Acoustic Calibrator	DC130171

- Test procedure : MA101N.

- Results :

- 6.1 Sound Pressure Level

- 6.1.1 Reference Sound Pressure Level

UUT Setting				Applied Value		UUT Reading (dB)	IEC 61672 Class 1 Spec. (dB)
Range (dB)	Function	Frequency Weighting	Time Weighting	Level (dB)	Freq. (kHz)		
30 - 130	L <sub>A</sub>	A	Fast	94.00	1	94.2	± 1.1

- 6.1.2 Linearity

UUT Setting				Applied Value		UUT Reading (dB)
Range (dB)	Function	Frequency Weighting	Time Weighting	Level (dB)	Freq. (kHz)	
30 - 130	L <sub>A</sub>	A	Fast	94.00	1	94.2 (Ref.)
				104.00		104.2
				114.00		114.2

IEC 61672 Class 1 Spec. : ± 0.6 dB per 10 dB step and ± 1.1 dB for overall different.

- 6.2 Time Weighting

UUT Setting				Applied Value		UUT Reading (dB)	IEC 61672 Class 1 Spec. (dB)
Range (dB)	Function	Frequency Weighting	Time Weighting	Level (dB)	Freq. (kHz)		
30 - 130	L <sub>A</sub>	A	Fast	94.00	1	94.2	Ref.
			Slow				± 0.3

This test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗室書面批准。

# Certificate of Calibration

## 校正證書

Certificate No. : C137684  
證書編號

### 6.3 Frequency Weighting

#### 6.3.1 A-Weighting

UUT Setting				Applied Value		UUT Reading (dB)	IEC 61672 Class 1 Spec. (dB)
Range (dB)	Function	Frequency Weighting	Time Weighting	Level (dB)	Freq.		
30 - 130	L <sub>A</sub>	A	Fast	94.00	63 Hz	67.9	-26.2 ± 1.5
					125 Hz	78.0	-16.1 ± 1.5
					250 Hz	85.5	-8.6 ± 1.4
					500 Hz	91.0	-3.2 ± 1.4
					1 kHz	94.2	Ref.
					2 kHz	95.5	+1.2 ± 1.6
					4 kHz	95.2	+1.0 ± 1.6
					8 kHz	93.2	-1.1 (+2.1 ; -3.1)
					12.5 kHz	89.8	-4.3 (+3.0 ; -6.0)

#### 6.3.2 C-Weighting

UUT Setting				Applied Value		UUT Reading (dB)	IEC 61672 Class 1 Spec. (dB)
Range (dB)	Function	Frequency Weighting	Time Weighting	Level (dB)	Freq.		
30 - 130	L <sub>A</sub>	C	Fast	94.00	63 Hz	93.3	-0.8 ± 1.5
					125 Hz	94.0	-0.2 ± 1.5
					250 Hz	94.2	0.0 ± 1.4
					500 Hz	94.2	0.0 ± 1.4
					1 kHz	94.2	Ref.
					2 kHz	94.1	-0.2 ± 1.6
					4 kHz	93.4	-0.8 ± 1.6
					8 kHz	91.3	-3.0 (+2.1 ; -3.1)
					12.5 kHz	87.8	-6.2 (+3.0 ; -6.0)

Remarks : - UUT Microphone Model No. : UC-59 & S/N : 02695

- Mfr's Spec. : IEC 61672 Class 1

- Uncertainties of Applied Value : 94 dB : 63 Hz - 125 Hz : ± 0.35 dB  
 250 Hz - 500 Hz : ± 0.30 dB  
 1 kHz : ± 0.20 dB  
 2 kHz - 4 kHz : ± 0.35 dB  
 8 kHz : ± 0.45 dB  
 12.5 kHz : ± 0.70 dB  
 104 dB : 1 kHz : ± 0.10 dB (Ref. 94 dB)  
 114 dB : 1 kHz : ± 0.10 dB (Ref. 94 dB)

- The uncertainties are for a confidence probability of not less than 95 %.

#### Note :

The values given in this Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environment changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Sun Creation Engineering Limited shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗室所書而批准。





輝創工程有限公司

Sun Creation Engineering Limited

Calibration and Testing Laboratory

# Certificate of Calibration 校正證書

Certificate No. : C144214

證書編號

ITEM TESTED / 送檢項目 (Job No. / 序引編號 : IC14-1719)

Date of Receipt / 收件日期 : 9 July 2014

Description / 儀器名稱 : Sound Level Calibrator

Manufacturer / 製造商 : Rion

Model No. / 型號 : NC-73

Serial No. / 編號 : 10786708

Supplied By / 委託者 : Envirotech Services Co.

Shop 6, G/F., Casio Mansion, 209 Shaukeiwan Road,  
Hong Kong

TEST CONDITIONS / 測試條件

Temperature / 溫度 :  $(23 \pm 2)^{\circ}\text{C}$

Relative Humidity / 相對濕度 :  $(55 \pm 20)\%$

Line Voltage / 電壓 : ---

TEST SPECIFICATIONS / 測試規範

Calibration check

DATE OF TEST / 測試日期 : 15 July 2014

TEST RESULTS / 測試結果

The results apply to the particular unit-under-test only.

All results are within manufacturer's specification.


The results are detailed in the subsequent page(s).

The test equipment used for calibration are traceable to National Standards via :

- The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory
- Rohde & Schwarz Laboratory, Germany
- Fluke Everett Service Center, USA
- Agilent Technologies, USA


Tested By

測試

  
H C Chan  
Engineer

Certified By

核證

  
K K Wong  
Engineer

Date of Issue

簽發日期

16 July 2014

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。

Sun Creation Engineering Limited – Calibration & Testing Laboratory

c/o 4/F, Tsing Shan Wan Exchange Building, I Hing On Lane, Tuen Mun, New Territories, Hong Kong

輝創工程有限公司 – 校正及檢測實驗室

c/o 香港新界屯門興安里一號青山灣機樓四樓

Tel/電話: 2927 2606

Fax/傳真: 2744 8986

E-mail/電郵: callab@suncreation.com

Website/網址: www.suncreation.com

Page 1 of 2





# Certificate of Calibration 校正證書

Certificate No. : C144214

證書編號

- The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 12 hours before the commencement of the test.
- The results presented are the mean of 3 measurements at each calibration point.
- Test equipment :

Equipment ID	Description	Certificate No.
CL130	Universal Counter	C143868
CL281	Multifunction Acoustic Calibrator	DC130171
TST150A	Measuring Amplifier	C141558

- Test procedure : MA100N.

- Results :

### 5.1 Sound Level Accuracy

UUT Nominal Value	Measured Value (dB)	Mfr's Spec. (dB)	Uncertainty of Measured Value (dB)
94 dB, 1 kHz	93.9	± 0.5	± 0.2

### 5.2 Frequency Accuracy

UUT Nominal Value (kHz)	Measured Value (kHz)	Mfr's Spec.	Uncertainty of Measured Value (Hz)
1	0.990	1 kHz ± 2 %	± 1

Remark : The uncertainties are for a confidence probability of not less than 95 %.

### Note :

The values given in this Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environment changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Sun Creation Engineering Limited shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗室所書面批准。



Appendix E  
Calibration Record  
(Water Quality Monitoring)





# ALS Technichem (HK) Pty Ltd

## REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION

**CONTACT:** MR IVAN LEUNG  
**CLIENT:** ALS TECHNICHEM (HK) PTY LTD  
**ADDRESS:** 11/F., CHUNG SHUN KNITTING CENTRE,  
1-3 WING YIP STREET,  
KWAI CHUNG,  
N.T., HONG KONG

**WORK ORDER:** HK1331461  
**LABORATORY:** HONG KONG  
**DATE RECEIVED:** 01/08/2014  
**DATE OF ISSUE:** 23/08/2014

### COMMENTS

It is certified that the item under calibration/checking has been calibrated/checked by corresponding calibrated equipment in the laboratory.

Maximum Tolerance and calibration frequency stated in the report, unless otherwise stated, the internal acceptance criteria of ALS will be followed.

Scope of Test: Conductivity, Dissolved Oxygen, pH, Salinity and Temperature  
Equipment Type: Multimeter  
Brand Name: YSI  
Model No.: Professional Plus  
Serial No.: 09K100735  
Equipment No.: --  
Date of Calibration: 03 August, 2014

### NOTES

This is the Final Report and supersedes any preliminary report with this batch number. Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release.

### ISSUING LABORATORY: HONG KONG

#### Address

ALS Technichem (HK) Pty Ltd  
11/F Chung Shun Knitting Centre  
1-3 Wing Yip Street  
Kwai Chung  
HONG KONG

**Phone:** 852-2610 1044  
**Fax:** 852-2610 2021  
**Email:** [hongkong@alsglobal.com](mailto:hongkong@alsglobal.com)

  
Mr. Fung Lim Chee, Richard  
General Manager  
Greater China & Hong Kong

*This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.*

Page 1 of 2



# REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION



**Work Order:** HK1331461  
**Date of Issue:** 23/08/2014  
**Client:** ALS TECHNICHEM (HK) PTY LTD

**Equipment Type:** Multimeter  
**Brand Name:** YSI  
**Model No.:** Professional Plus  
**Serial No.:** 09K100735  
**Equipment No.:** --  
**Date of Calibration:** 03 August, 2014      **Date of next Calibration:** 03 November, 2014

**Parameters:**

**Conductivity**

**Method Ref: APHA (21st edition), 2510B**

Expected Reading (uS/cm)	Displayed Reading (uS/cm)	Tolerance (%)
146.9	147.1	0.1
6667	6564	-1.5
12890	12424	-3.6
58670	58800	0.2
Tolerance Limit (±%)		10.0

**Dissolved Oxygen**

**Method Ref: APHA (21st edition), 4500: G**

Expected Reading (mg/L)	Displayed Reading (mg/L)	Tolerance (mg/L)
4.38	4.49	0.11
7.04	7.19	0.15
8.48	8.57	0.09
Tolerance Limit (±mg/L)		0.20

**pH Value**

**Method Ref: APHA 21st Ed. 4500H:B**

Expected Reading (pH Unit)	Displayed Reading (pH Unit)	Tolerance (pH unit)
4.0	4.11	0.11
7.0	7.06	0.06
10.0	9.98	-0.02
Tolerance Limit (±pH unit)		0.20

**Salinity**

**Method Ref: APHA (21st edition), 2520B**

Expected Reading (ppt)	Displayed Reading (ppt)	Tolerance (%)
0	0.00	--
10	10.36	3.6
20	20.85	4.3
30	30.40	1.3
Tolerance Limit (±%)		10.0

**Temperature**

**Method Ref: Section 6 of International Accreditation New Zealand Technical Guide No. 3 Second edition March 2008: Working Thermometer Calibration Procedure.**

Expected Reading (°C)	Displayed Reading (°C)	Tolerance (°C)
12.0	12.8	0.8
23.0	23.5	0.5
38.0	37.7	-0.3
Tolerance Limit (±°C)		2.0

Remark: "Displayed Reading" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.

  
 \_\_\_\_\_  
 Mr. Fung Lim Chee, Richard  
 General Manager -  
 Greater China & Hong Kong



---

ALS Technichem (HK) Pty Ltd  
11/F, Chung Shun Knitting Centre  
1-3 Wing Yip Street  
Kwai Chung, N.T., Hong Kong  
T: +852 2610 1044  
F: +852 2610 2021  
www.alsglobal.com

## REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION

**CONTACT:** MR THOMAS WONG  
**CLIENT:** ENOVATIVE ENVIRONMENTAL SERVICE LTD  
**ADDRESS:** RM811, HIN PUI HOUSE,  
HIN KENG ESTATE,  
TAI WAI,  
N.T., HONG KONG  
**PROJECT:** --

**WORK ORDER:** HK1417111  
**LABORATORY:** HONG KONG  
**DATE RECEIVED:** 01/06/2014  
**DATE OF ISSUE:** 11/06/2014

---

### COMMENTS

It is certified that the item under calibration/checking has been calibrated/checked by corresponding calibrated equipment in the laboratory.  
Maximum Tolerance and calibration frequency stated in the report, unless otherwise stated, the internal acceptance criteria of ALS will be followed.

Scope of Test: Dissolved Oxygen, pH, Salinity and Temperature  
Equipment Type: Multimeter  
Brand Name: YSI  
Model No.: Proplus  
Serial No.: 10D101565  
Equipment No.: --  
Date of Calibration: 01 June, 2014

---

### NOTES

This is the Final Report and supersedes any preliminary report with this batch number.  
Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release.

---

  
Mr. Fung Lim Chee, Richard  
General Manager  
Greater China & Hong Kong

# REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION



**Work Order:** HK1417111  
**Date of Issue:** 11/06/2014  
**Client:** ENOVATIVE ENVIRONMENTAL SERVICE LTD

**Description:** Multimeter  
**Brand Name:** YSI  
**Model No.:** Proplus  
**Serial No.:** 10D101565  
**Equipment No.:** --  
**Date of Calibration:** 01 June, 2014

**Parameters:**

**Dissolved Oxygen**

**Method Ref: APHA (21st edition), 4500G**

Expected Reading (mg/L)	Displayed Reading (mg/L)	Tolerance (mg/L)
3.43	3.40	0.03
6.28	6.38	0.10
8.25	8.29	0.04
Tolerance Limit ( $\pm$ mg/L)		0.20

**pH Value**

**Method Ref: APHA 21st Ed. 4500H:B**

Expected Reading (pH Unit)	Displayed Reading (pH Unit)	Tolerance (pH unit)
4.0	4.04	0.04
7.0	7.05	0.05
10.0	9.95	-0.05
Tolerance Limit ( $\pm$ pH unit)		0.20

**Salinity**

**Method Ref: APHA (21st edition), 2520B**

Expected Reading (ppt)	Displayed Reading (ppt)	Tolerance (%)
0	0.00	--
10	9.96	-0.4
20	19.21	-4.0
30	29.82	0.0
Tolerance Limit ( $\pm$ %)		10.0

**Temperature**

**Method Ref: Section 6 of International Accreditation New Zealand Technical Guide No. 3 Second edition March 2008: Working Thermometer Calibration Procedure.**

Expected Reading ( $^{\circ}$ C)	Displayed Reading ( $^{\circ}$ C)	Tolerance ( $^{\circ}$ C)
10.0	10.3	0.3
20.5	20.6	0.1
30.0	31.0	1.0
Tolerance Limit ( $\pm$ $^{\circ}$ C)		2.0

Remark: "Displayed Reading" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.

  
 Mr. Fung Lim Chee, Richard  
 General Manager  
 Greater China & Hong Kong





ALS Technichem (HK) Pty Ltd  
11/F, Chung Shun Knitting Centre  
1-3 Wing Yip Street  
Kwai Chung, N.T., Hong Kong  
T: +852 2610 1044  
F: +852 2610 2021  
www.alsglobal.com

## REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION

**CONTACT:** MR THOMAS WONG  
**CLIENT:** ENOVATIVE ENVIRONMENTAL SERVICE LTD  
**ADDRESS:** RM811, HIN PUI HOUSE,  
HIN KENG ESTATE,  
TAI WAI,  
N.T., HONG KONG  
**PROJECT:** --

**WORK ORDER:** HK1424448  
**LABORATORY:** HONG KONG  
**DATE RECEIVED:** 01/08/2014  
**DATE OF ISSUE:** 11/08/2014

### COMMENTS

The performance of the equipment stated in this report is checked with independent reference material and results compared against a calibrated secondary source.  
The "Tolerance Limit" quoted is the acceptance criteria applicable for similar equipment used by the ALS Hong Kong laboratory or quoted from relevant international standards.  
The "Next Calibration Date" is recommended according to best practice principals as practised by the ALS Hong Kong laboratory or quoted from relevant international standards.

Scope of Test: Turbidity  
Description: Turbidimeter  
Brand Name: HACH  
Model No.: 2100Q  
Serial No.: 09120C000514  
Equipment No.: --  
Date of Calibration: 01 August, 2014

### NOTES

This is the Final Report and supersedes any preliminary report with this batch number.  
Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release.

Mr. Fung Lim Chee, Richard  
General Manager -  
Greater China & Hong Kong

# REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION

**Work Order:** HK1424448  
**Date of Issue:** 11/08/2014  
**Client:** ENOVATIVE ENVIRONMENTAL SERVICE LTD



**Description:** Turbidimeter  
**Brand Name:** HACH  
**Model No.:** 2100Q  
**Serial No.:** 09120C000514  
**Equipment No.:** --  
**Date of Calibration:** 01 August, 2014      **Date of next Calibration:** 01 November, 2014

## Parameters:

### Turbidity

**Method Ref: APHA 21st Ed. 2130B**

Expected Reading (NTU)	Displayed Reading (NTU)	Tolerance (%)
0	0.00	--
4	4.21	+5.3
40	41.7	+4.3
80	76.0	-5.0
400	419	+4.8
800	838	+4.8
	Tolerance Limit ( $\pm\%$ )	10.0

Remark: "Displayed Reading" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.

  
Mr. Fung Lim Chee, Richard  
General Manager  
Greater China & Hong Kong



ALS Technichem (HK) Pty Ltd  
11/F, Chung Shun Knitting Centre  
1-3 Wing Yip Street  
Kwai Chung, N.T., Hong Kong  
T: +852 2610 1044  
F: +852 2610 2021  
www.alsglobal.com

## REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION

**CONTACT:** MR THOMAS WONG  
**CLIENT:** ENOVATIVE ENVIRONMENTAL SERVICE LTD  
**ADDRESS:** RM811, HIN PUI HOUSE,  
HIN KENG ESTATE,  
TAI WAI,  
N.T., HONG KONG

**WORK ORDER:** HK1415042  
**LABORATORY:** HONG KONG  
**DATE RECEIVED:** 05/05/2014  
**DATE OF ISSUE:** 09/05/2014

### COMMENTS

The performance of the equipment stated in this report is checked with independent reference material and results compared against a calibrated secondary source.

The "Tolerance Limit" quoted is the acceptance criteria applicable for similar equipment used by the ALS Hong Kong laboratory or quoted from relevant international standards.

The "Next Calibration Date" is recommended according to best practice principals as practised by the ALS Hong Kong laboratory or quoted from relevant international standards.

Scope of Test: Turbidity  
Description: Turbidimeter  
Brand Name: HACH  
Model No.: 2100Q IS  
Serial No.: 13120C004242  
Equipment No.: --  
Date of Calibration: 02 May, 2014

### NOTES

This is the Final Report and supersedes any preliminary report with this batch number.

Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release.

Mr. Fung Lim Chee, Richard  
General Manager -  
Greater China & Hong Kong

# REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION

Work Order: HK1415042  
Date of Issue: 09/05/2014  
Client: ENOVATIVE ENVIRONMENTAL SERVICE LTD



Description: Turbidimeter  
Brand Name: HACH  
Model No.: 2100Q IS  
Serial No.: 13120C004242  
Equipment No.: --  
Date of Calibration: 02 May, 2014      Date of next Calibration: 02 August, 2014

## Parameters:

### Turbidity

Method Ref: APHA 21st Ed. 2130B

Expected Reading (NTU)	Displayed Reading (NTU)	Tolerance (%)
0	0.1	--
4	4.2	+5.0
40	38.1	-4.8
80	75.0	-6.3
400	361	-9.8
800	724	-9.5
	Tolerance Limit ( $\pm$ %)	10.0


Remark: "Displayed Reading" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.

  
Mr. Fung Lim Chee, Richard  
General Manager -  
Greater China & Hong Kong


## Appendix F. Graphical Plots of the Monitoring Results

# Air Quality

## 1-hour TSP Level at ASR1

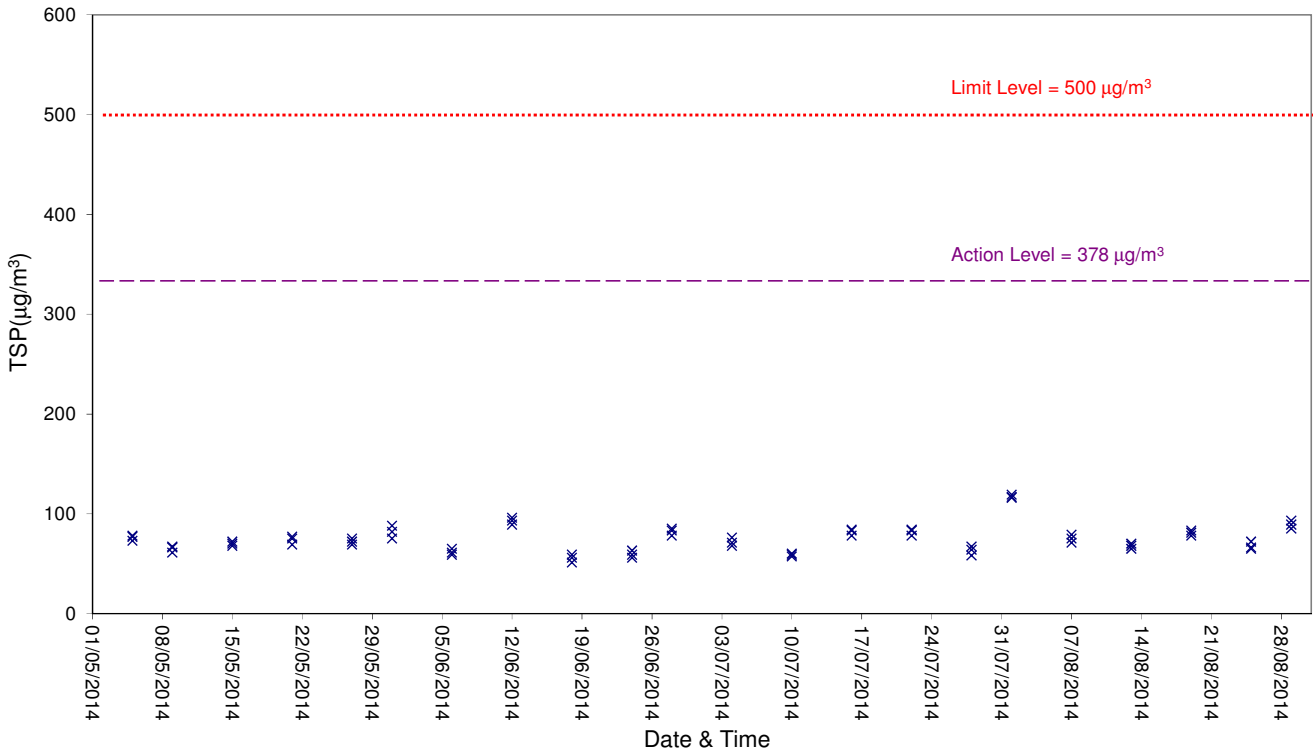


## 1-hour TSP Level at ASR2A

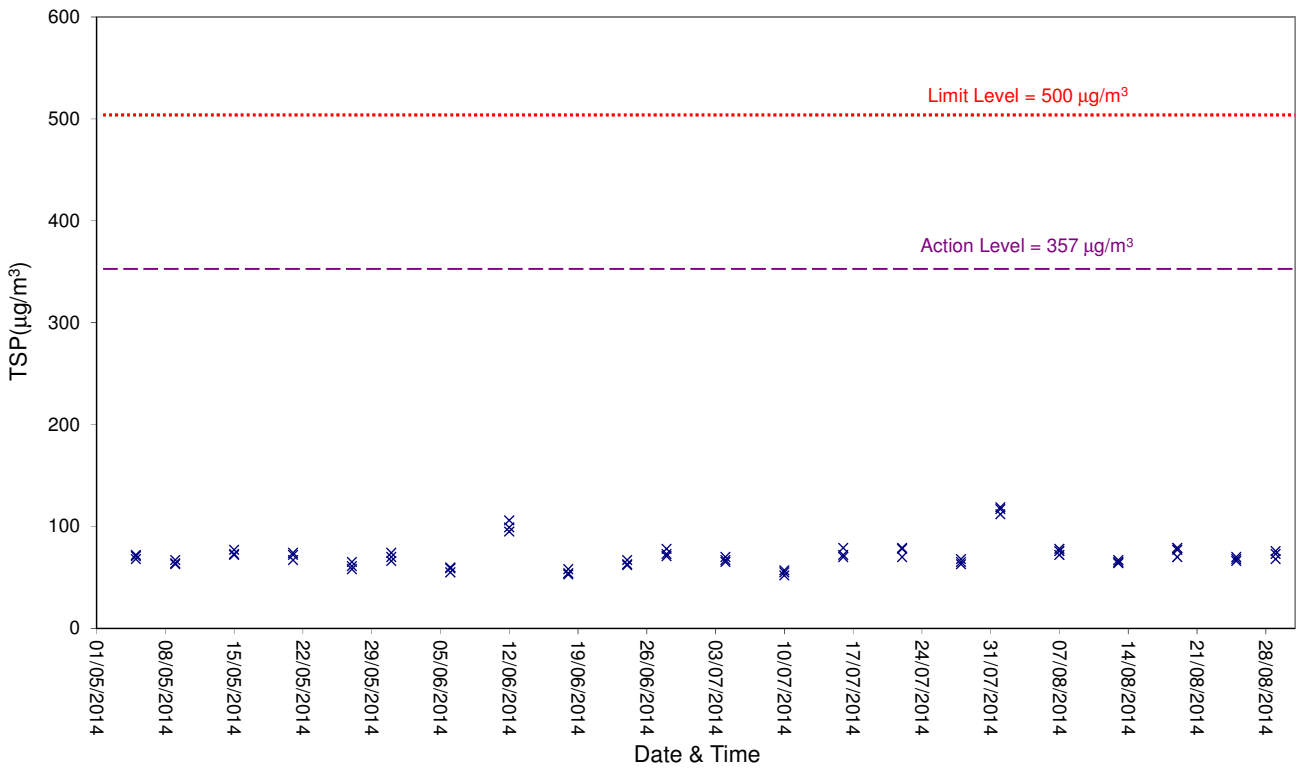


# Air Quality

## 1-hour TSP Level at ASR3

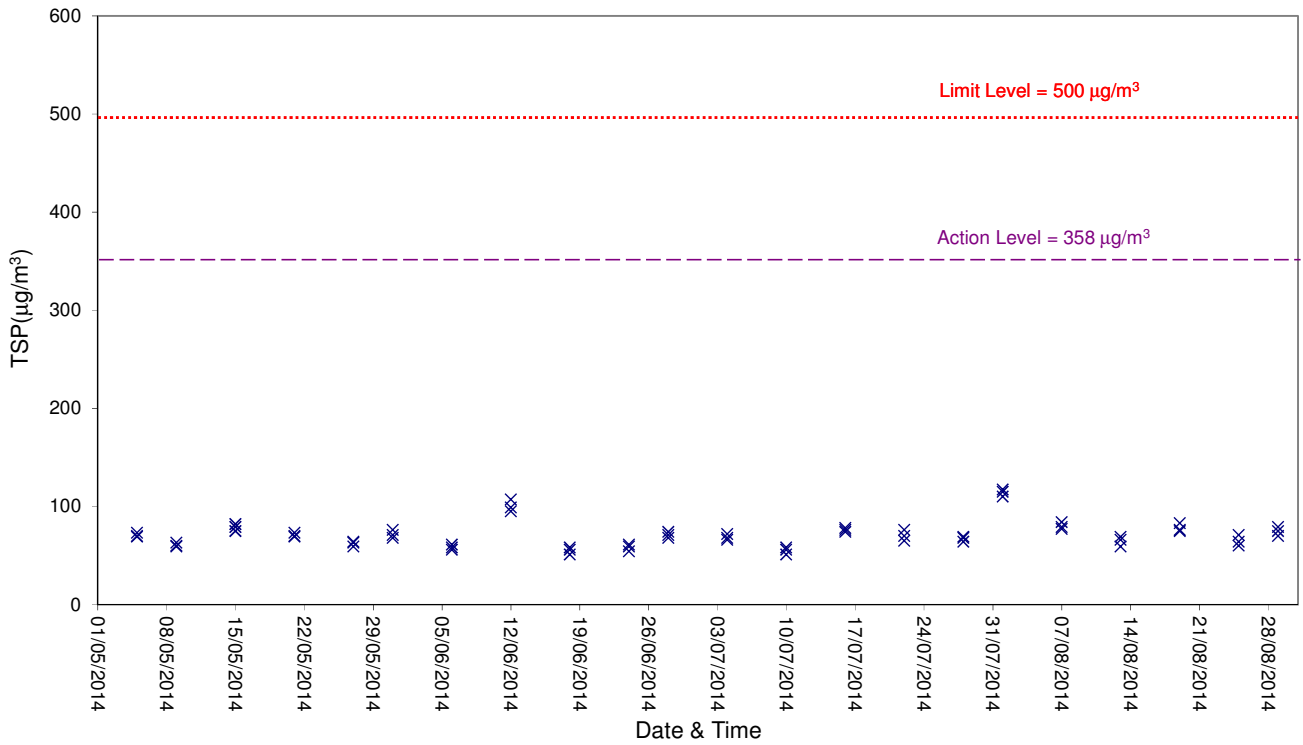


## 1-hour TSP Level at ASR4

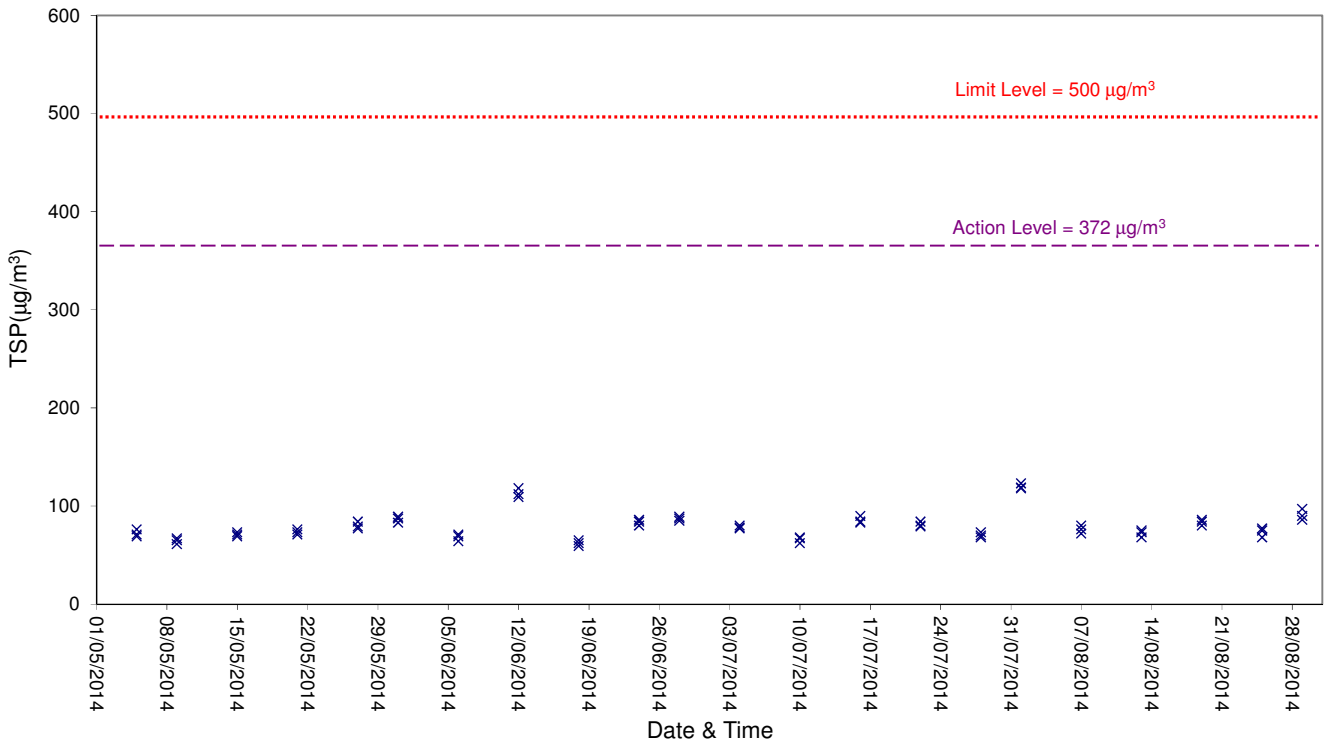




# Air Quality

## 24-hour TSP Level at ASR1

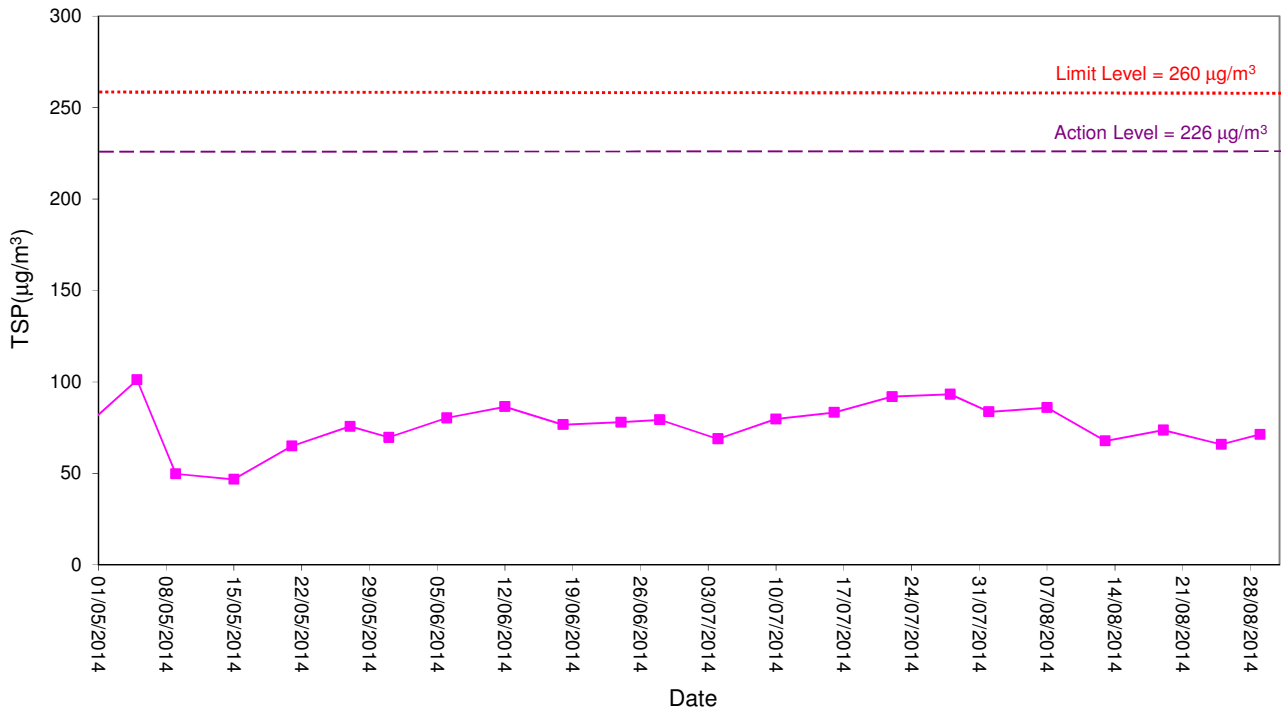


## 24-hour TSP Level at ASR2A

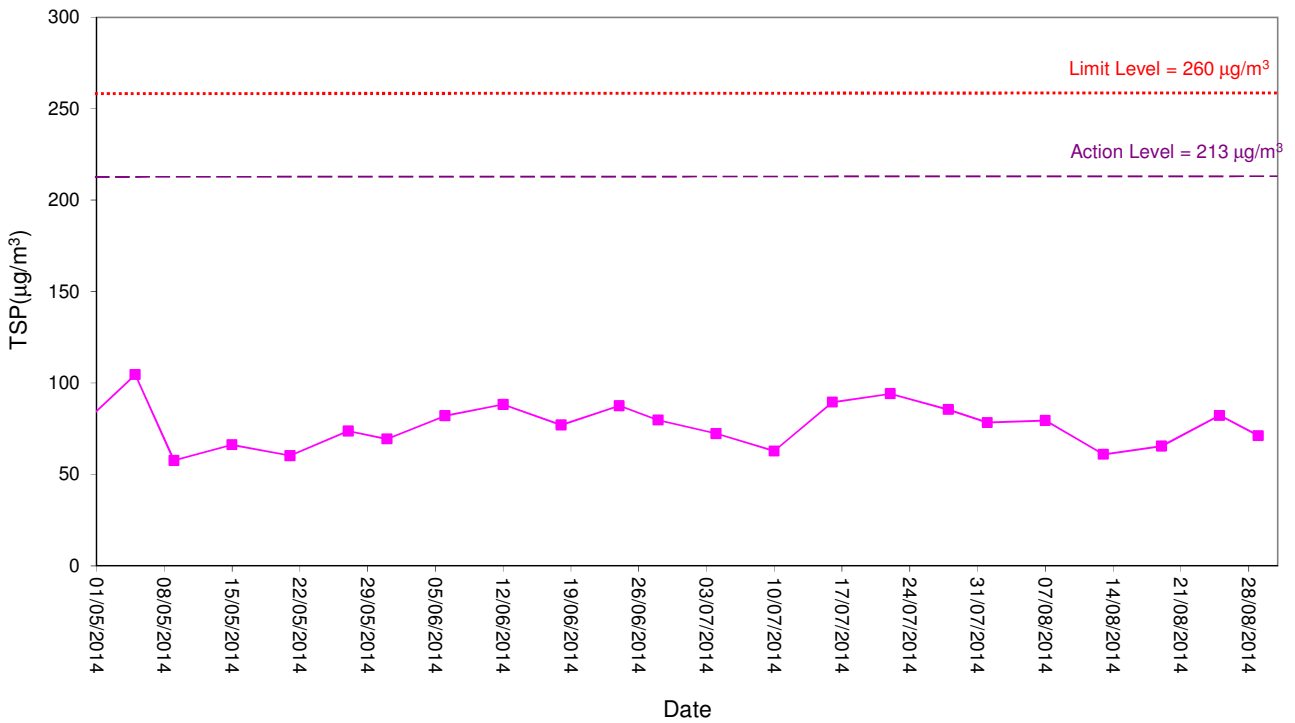




# Air Quality

## 24-hour TSP Level at ASR3

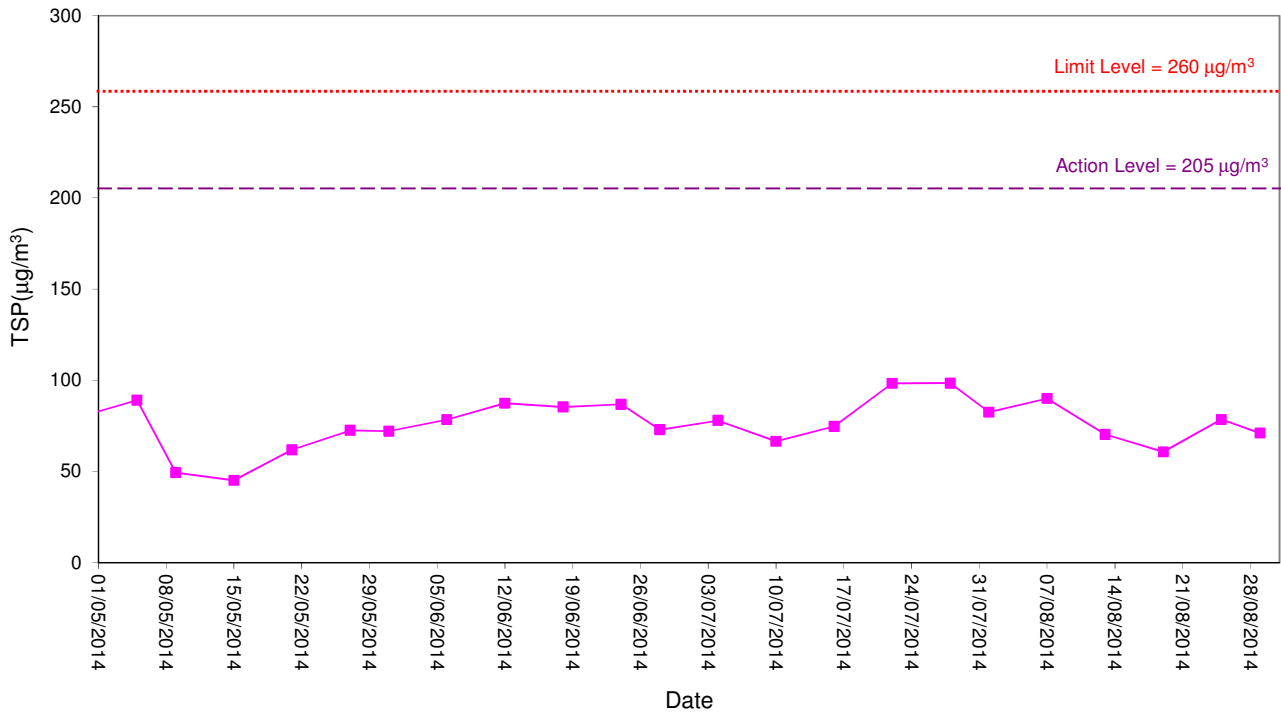


## 24-hour TSP Level at ASR4

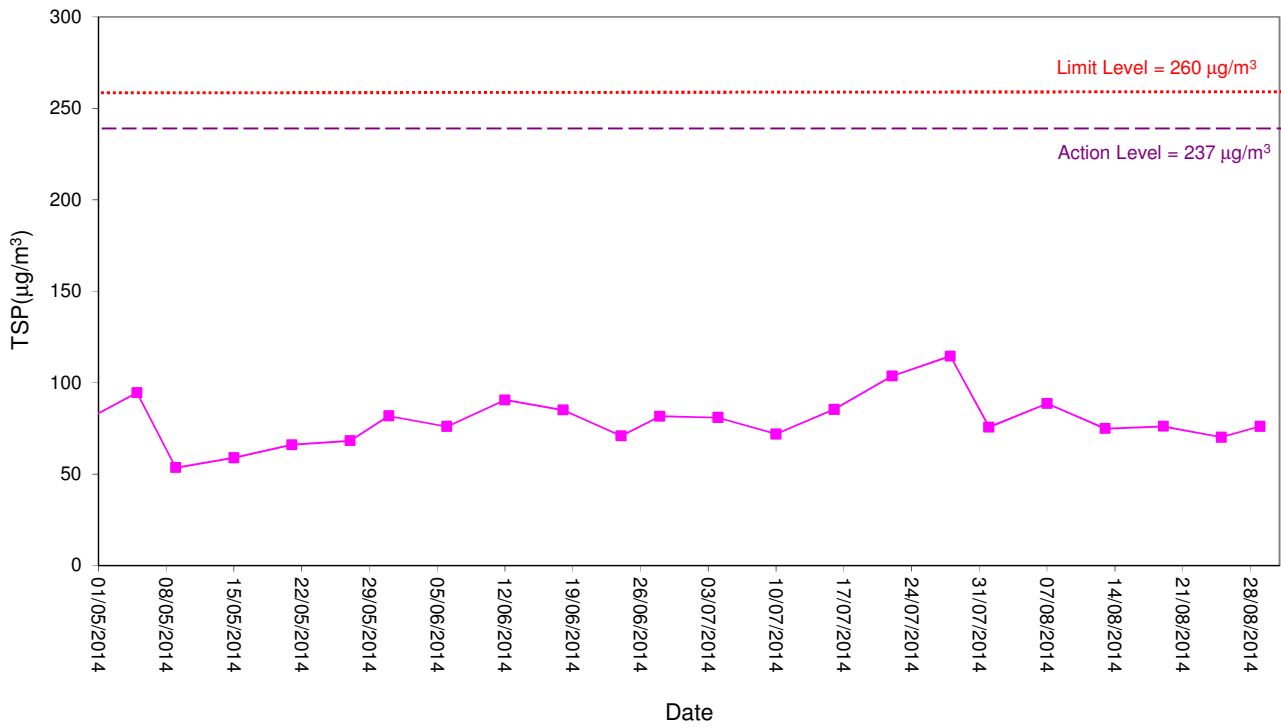


# Noise

## Noise Level for 30 min, dB(A), at NSR1

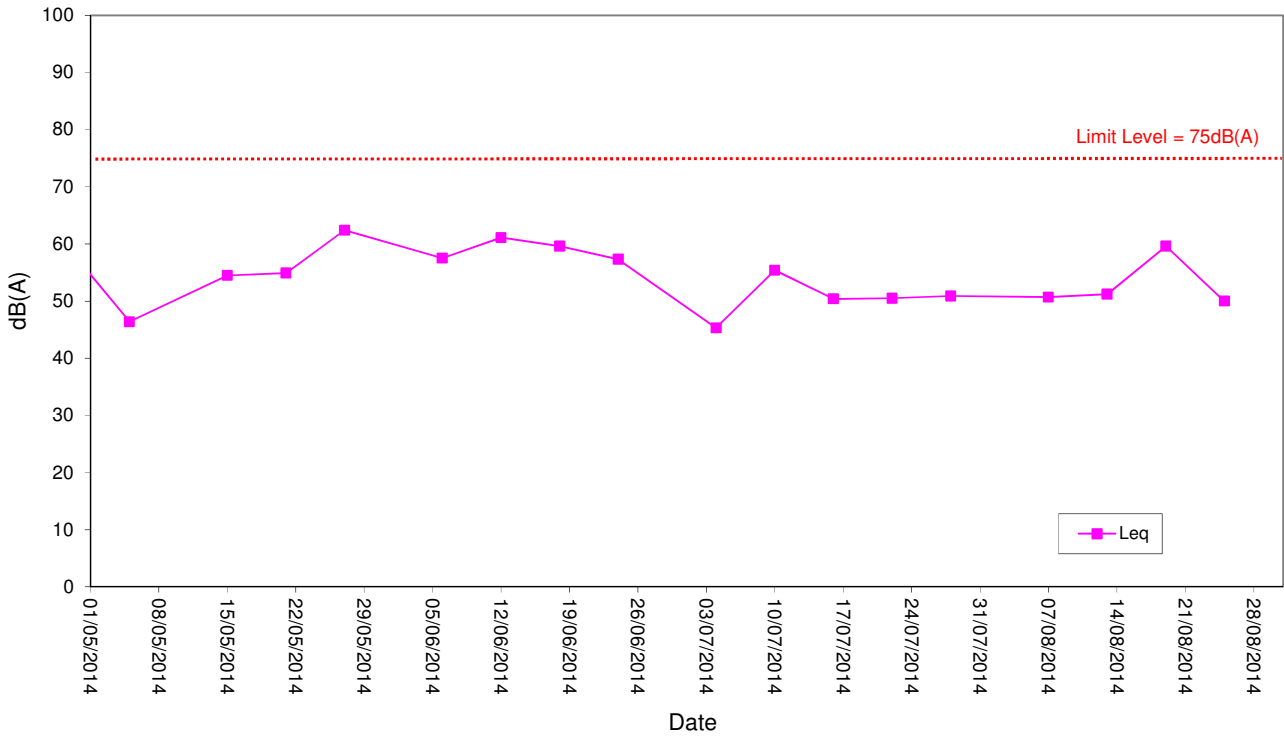


## Noise Level for 30 min, dB(A), at NSR3

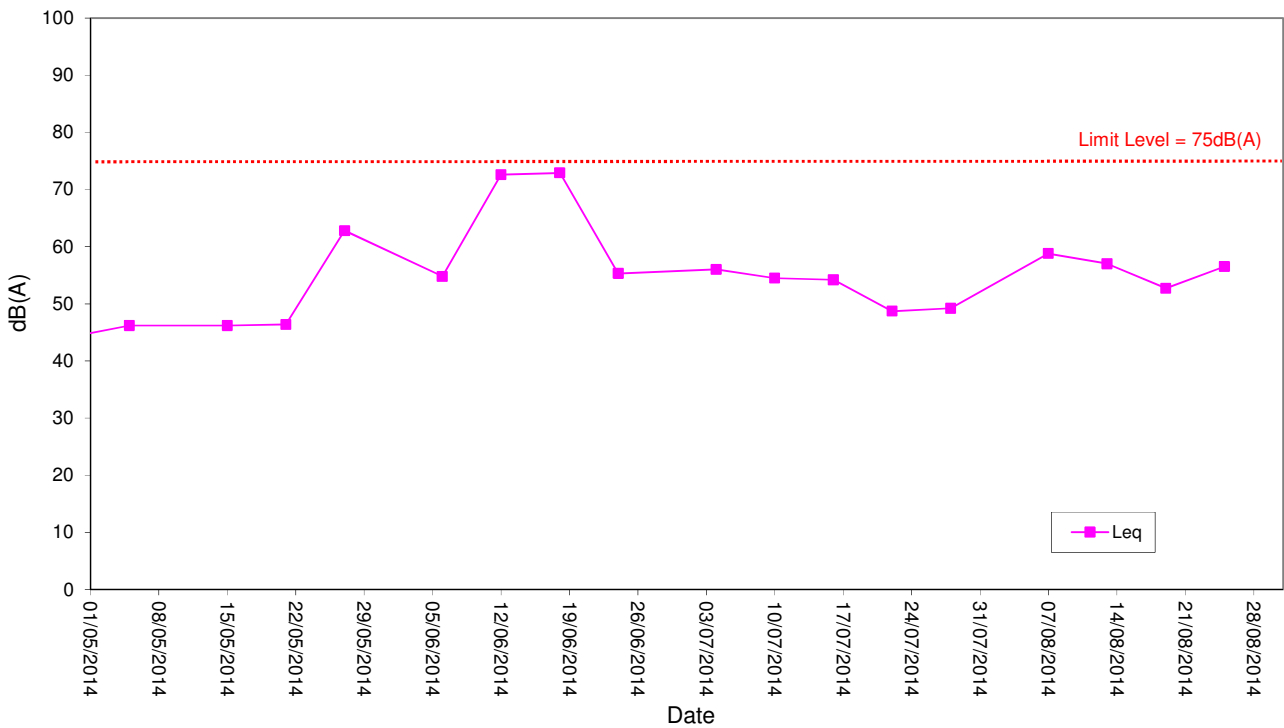


# Noise

## Noise Level for 30 min, dB(A), at NSR5

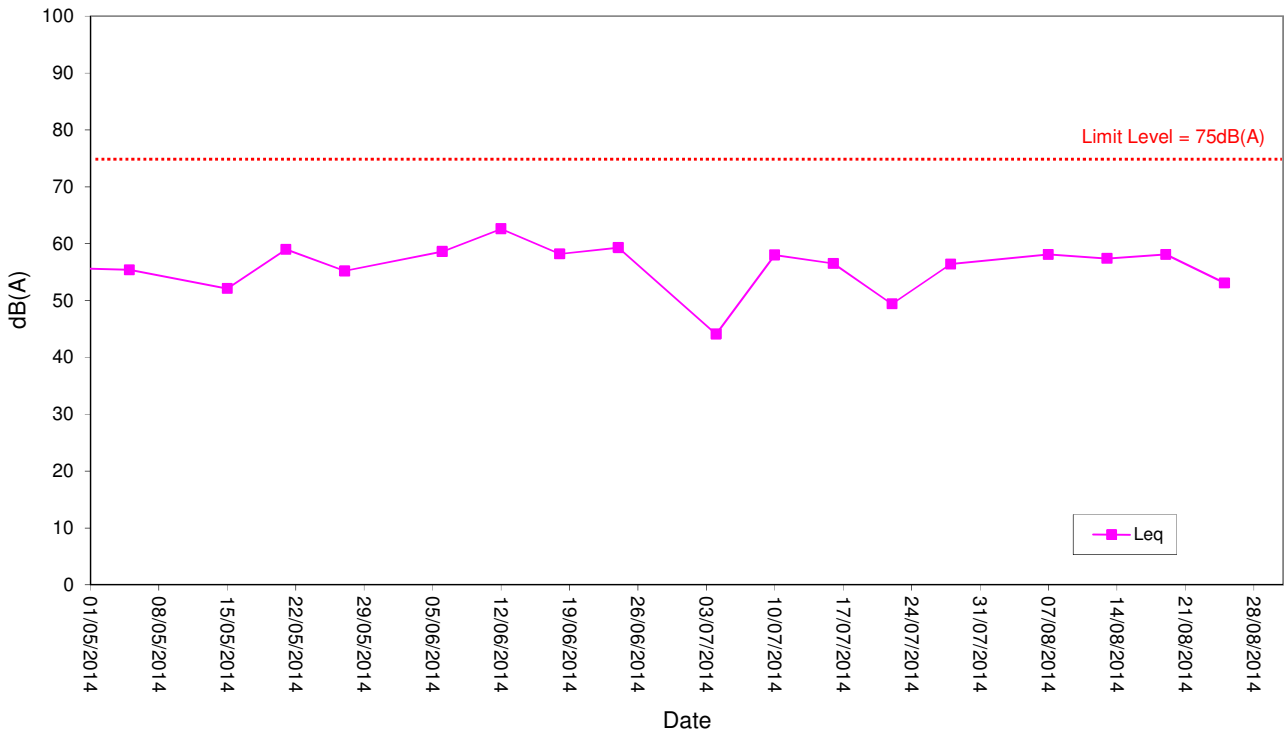


## Noise Level for 30 min, dB(A), at NSR7

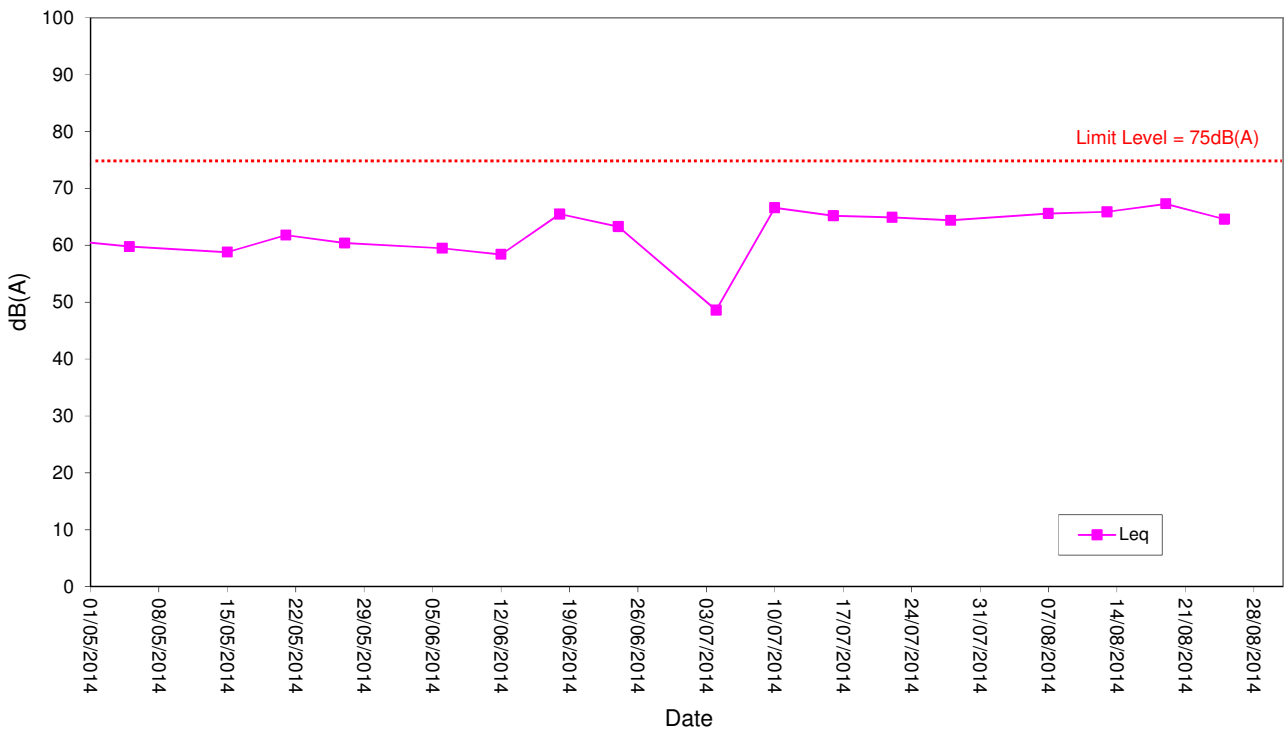


# Water Quality


### Temperature at MP3

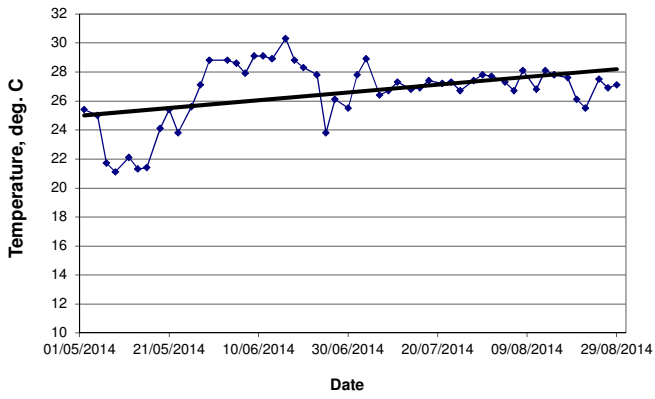


### pH at MP3

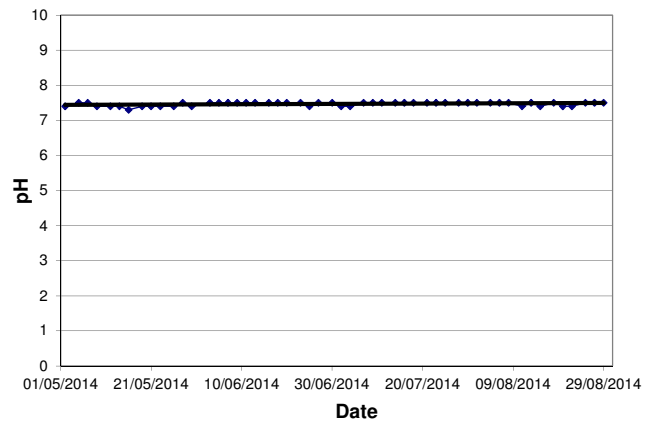

### Dissolved Oxygen (DO) at MP3

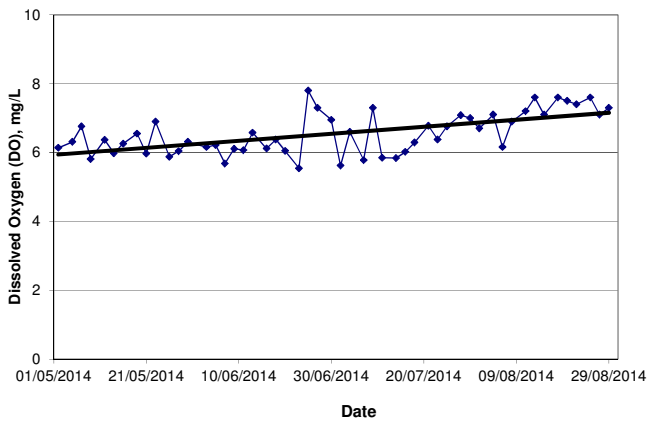


### Turbidity at MP3

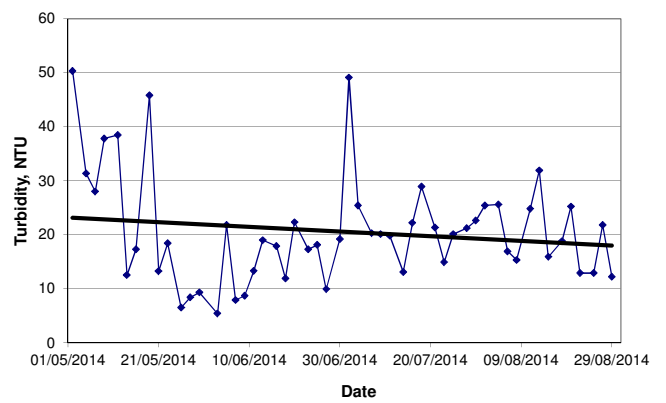


### BOD at MP3

Note: Zero-plots mean that BOD value is too low to indicate (<2mg/L).

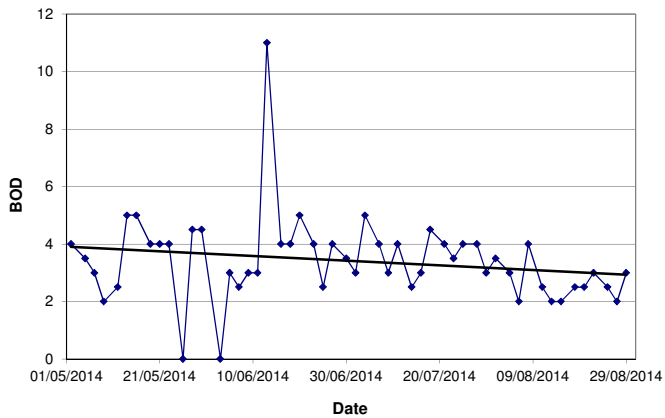


### Suspended Solids (SS) at MP3

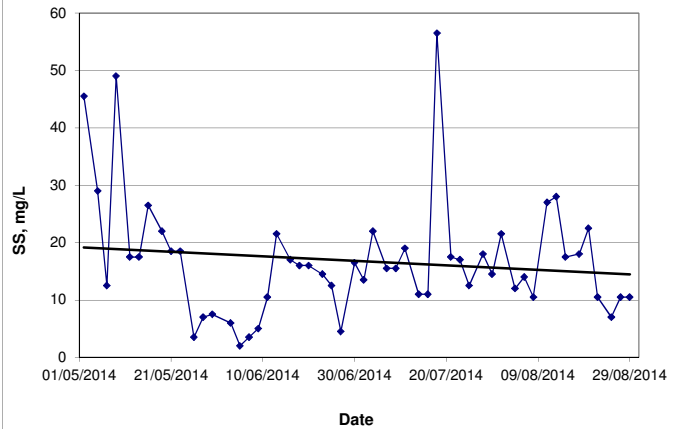


# Water Quality


### Temperature at MP4

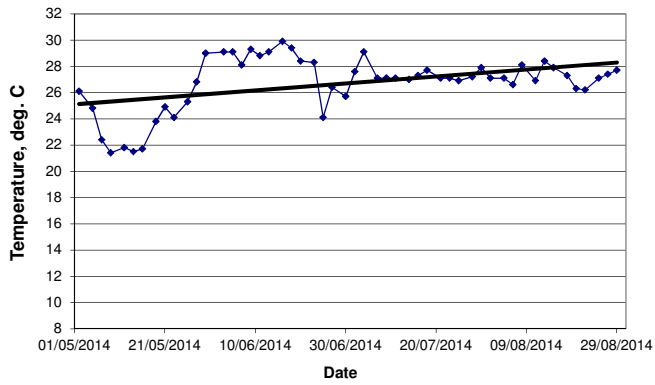


### pH at MP4

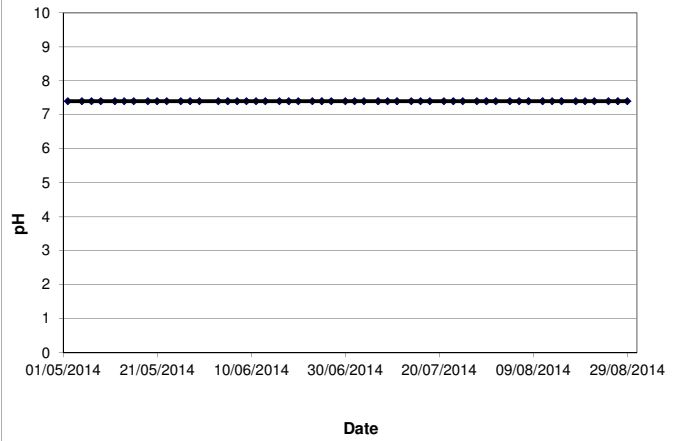

### Dissolved Oxygen (DO) at MP4

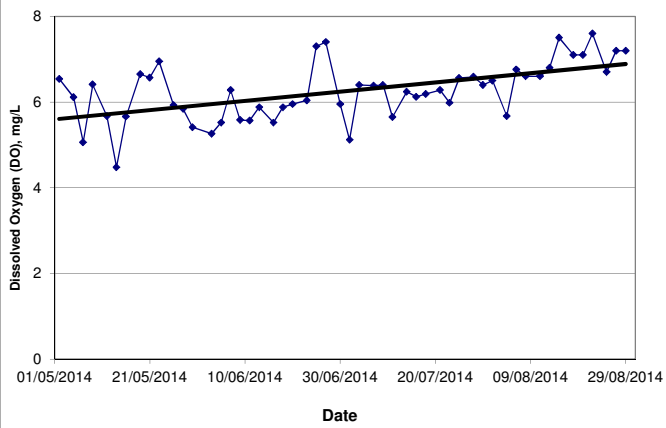


### Turbidity at MP4

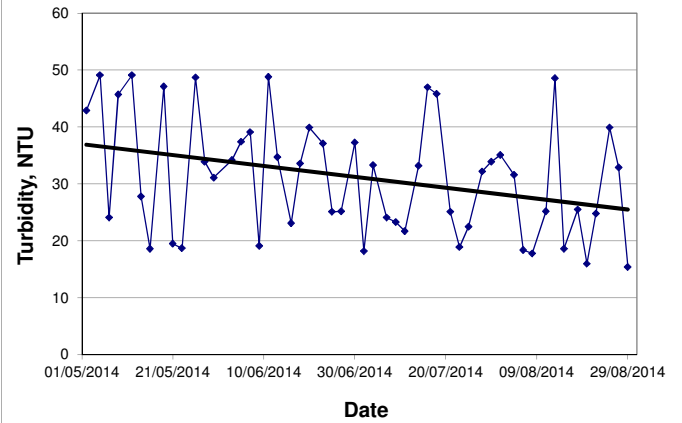


### BOD at MP4

Note: Zero-plots mean that BOD value is too low to indicate (<2mg/L).

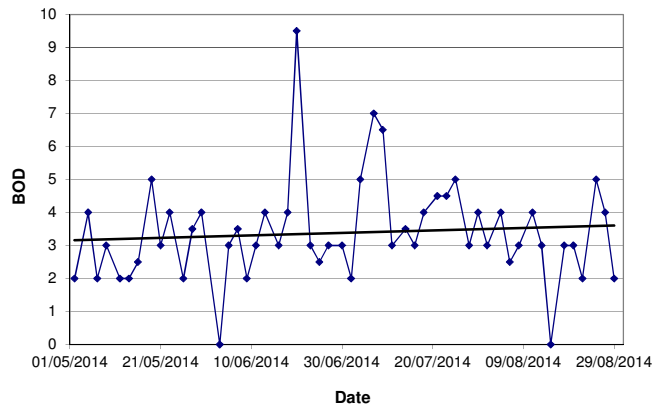


### Suspended Solids (SS) at MP4

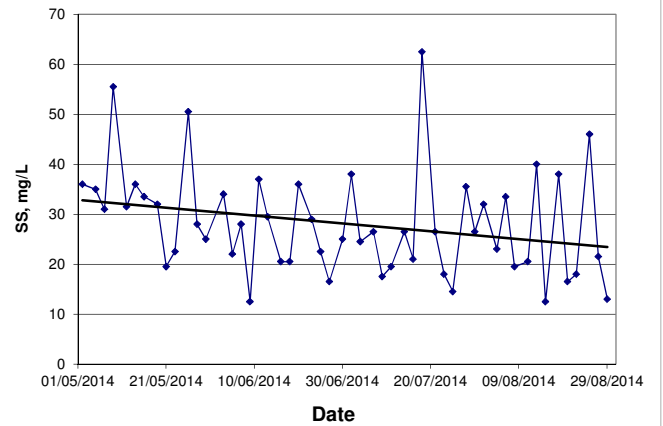


# Water Quality


### Temperature at MP5

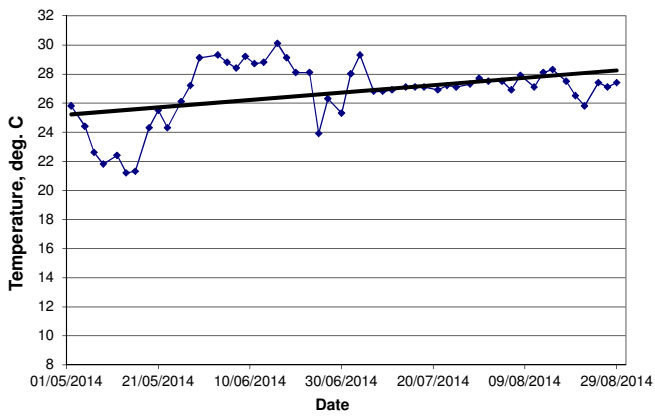


### pH at MP5

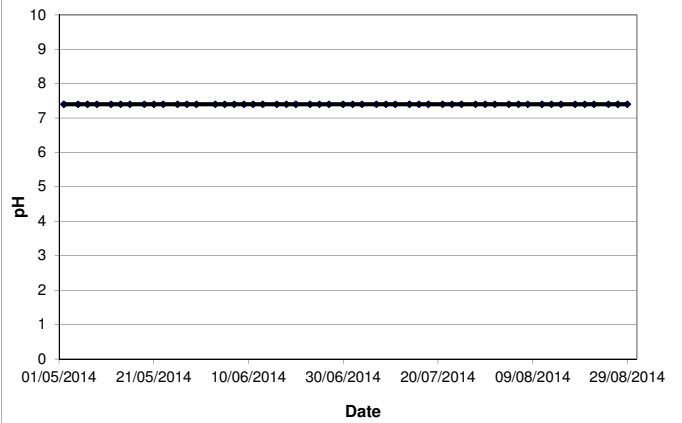

### Dissolved Oxygen (DO) at MP5

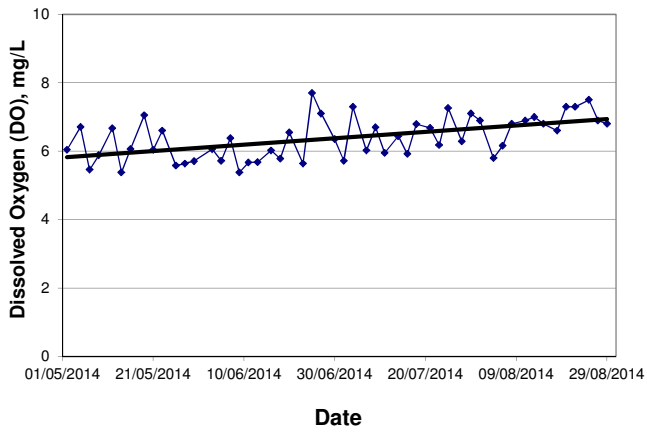


### Turbidity at MP5

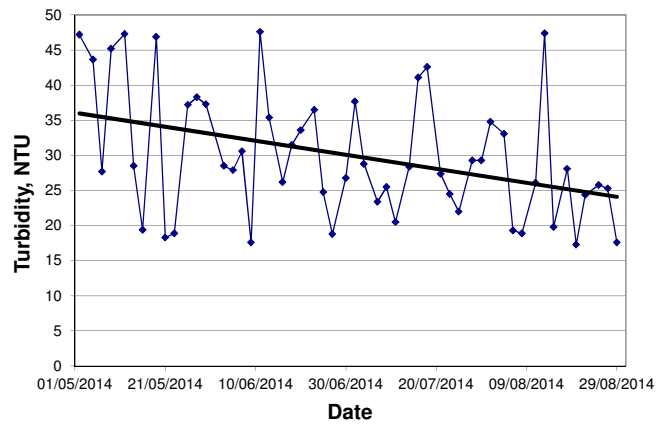


### BOD at MP5

Note: Zero-plots mean that BOD value is too low to indicate (<2mg/L).

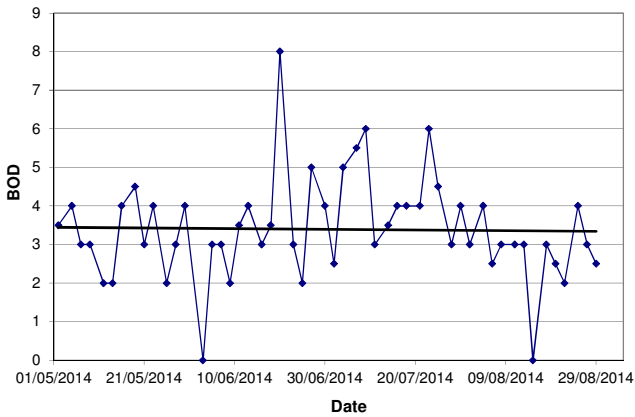


### Suspended Solids (SS) at MP5

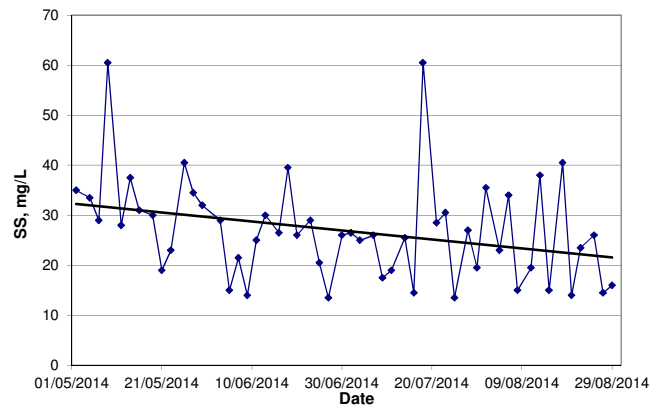


# Water Quality


### Temperature at MP6

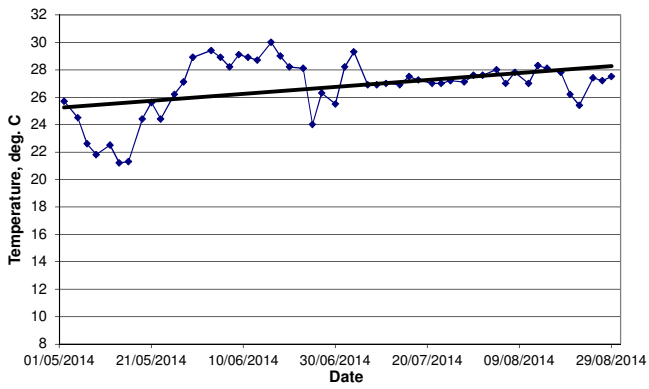


### pH at MP6

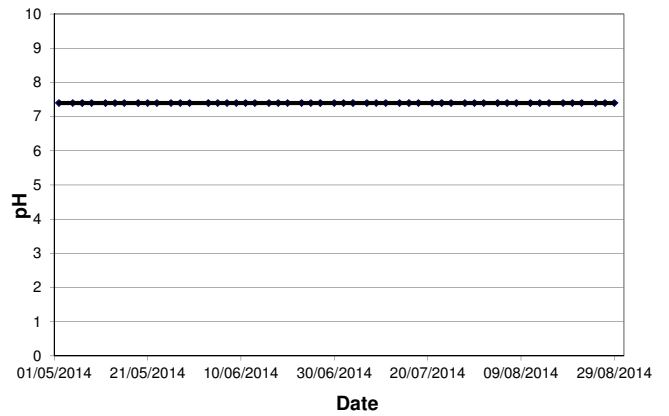

### Dissolved Oxygen (DO) at MP6

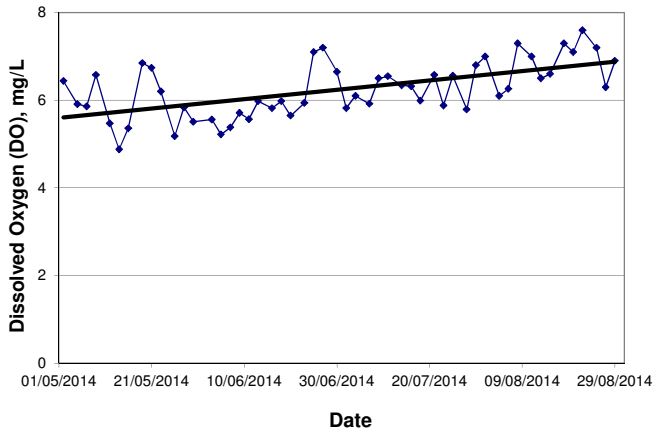


### Turbidity at MP6

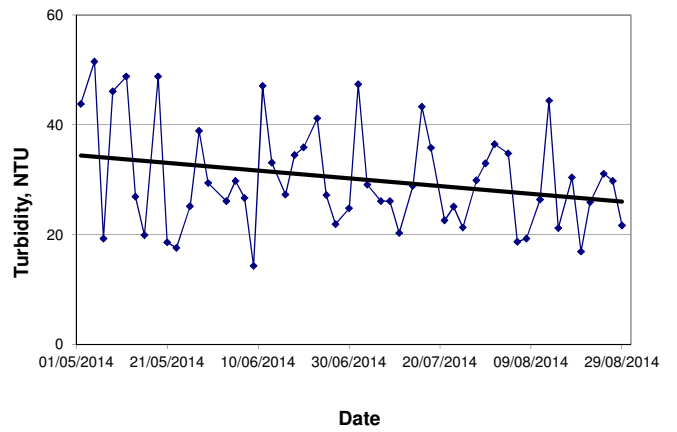


### BOD at MP6

Note: Zero-plots mean that BOD value is too low to indicate (<2mg/L).

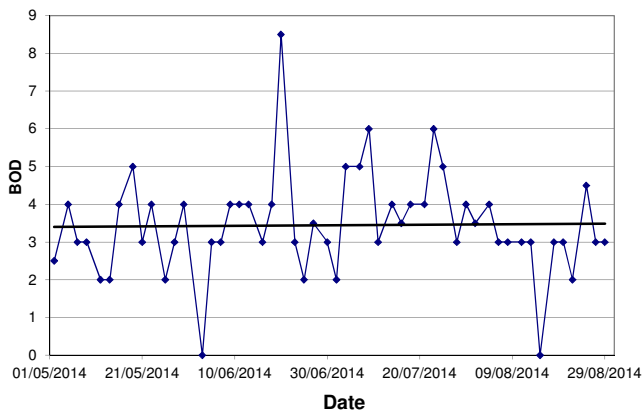

### Suspended Solids (SS) at MP6

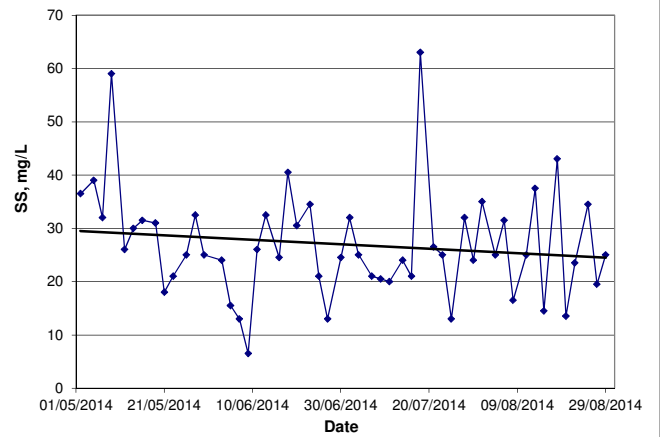



## CERTIFICATE OF ANALYSIS

<i>Client</i>	: ENOVATIVE ENVIRONMENTAL SERVICE LTD	<i>Laboratory</i>	: ALS Technichem HK Pty Ltd	<i>Page</i>	: 1 of 3
<i>Contact</i>	: MR THOMAS WONG	<i>Contact</i>	: Fung Lim Chee, Richard	<i>Work Order</i>	: <b>HK1424431</b>
<i>Address</i>	: RM811, HIN PUI HOUSE, HIN KENG ESTATE, TAI WAI, N.T. HONG KONG	<i>Address</i>	: 11/F., Chung Shun Knitting Centre, 1 - 3 Wing Yip Street, Kwai Chung, N.T., Hong Kong		
<i>E-mail</i>	: Thomas.wong@eno.com.hk	<i>E-mail</i>	: Richard.Fung@alsglobal.com		
<i>Telephone</i>	: ----	<i>Telephone</i>	: +852 2610 1044		
<i>Facsimile</i>	: ----	<i>Facsimile</i>	: +852 2610 2021		
<i>Project</i>	: PROPOSED COMPREHENSIVE DEVELOPMENT AT WO SHANG WAI YUEN LONG	<i>Quote number</i>	: HK/1577/2009**	<i>Date received</i>	: 01-AUG-2014
<i>Order number</i>	: ----			<i>Date of issue</i>	: 12-AUG-2014
<i>C-O-C number</i>	: ----			<i>No. of samples</i>	- Received : 8
<i>Site</i>	: ----				- Analysed : 8

### Report Comments

This report for ALS Technichem (HK) Pty Ltd work order reference HK1424431 supersedes any previous reports with this reference. The completion date of analysis is 06-AUG-2014. Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release. When date(s) and/or time(s) are shown bracketed, these have been assumed by the laboratory for process purposes. Abbreviations: CAS number = Chemical Abstract Services number. LOR = Limit of reporting.

Specific comments for Work Order HK1424431 :  
Sample(s) were received in a chilled condition.  
Water sample(s) analysed and reported on an as received basis.

This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.

This document has been electronically signed by those names that appear on this report and are the authorised signatories. Electronic signing has been carried out in compliance with procedures specified in the 'Electronic Transactions Ordinance' of Hong Kong, Chapter 553, Section 6.

<u>Signatory</u>	<u>Position</u>	<u>Authorised results for:-</u>
Fung Lim Chee, Richard	General Manager	Inorganics





**Analytical Results**

Sub-Matrix: WATER

			Compound	EA025: Suspended Solids (SS)	EP030: Biochemical Oxygen Demand		
			LOR Unit	2 mg/L	2 mg/L		
Client sample ID	Client sampling date / time	Laboratory sample ID		EA/ED: Physical and Aggregate Properties	EP: Aggregate Organics		
MP3-1	[01-AUG-2014]	HK1424431-001		22	3		
MP3-2	[01-AUG-2014]	HK1424431-002		21	4		
MP4-1	[01-AUG-2014]	HK1424431-003		32	3		
MP4-2	[01-AUG-2014]	HK1424431-004		32	3		
MP5-1	[01-AUG-2014]	HK1424431-005		37	3		
MP5-2	[01-AUG-2014]	HK1424431-006		34	3		
MP6-1	[01-AUG-2014]	HK1424431-007		34	3		
MP6-2	[01-AUG-2014]	HK1424431-008		35	4		



**Laboratory Duplicate (DUP) Report**

Matrix: WATER

				Laboratory Duplicate (DUP) Report				
Laboratory sample ID	Client sample ID	Method: Compound	CAS Number	LOR	Unit	Original Result	Duplicate Result	RPD (%)
<b>EA/ED: Physical and Aggregate Properties (QC Lot: 3574816)</b>								
HK1424428-003	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	4	5	0.0
HK1424432-002	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	55	56	2.0

**Method Blank (MB), Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report**

Matrix: WATER

			Method Blank (MB) Report			Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report					
Method: Compound	CAS Number	LOR	Unit	Result	Spike Concentration	Spike Recovery (%)		Recovery Limits (%)		RPDs (%)	
						LCS	DCS	Low	High	Value	Control Limit
<b>EA/ED: Physical and Aggregate Properties (QCLot: 3574816)</b>											
EA025: Suspended Solids (SS)	----	2	mg/L	<2	10 mg/L	100	----	92	108	----	----
<b>EP: Aggregate Organics (QCLot: 3577664)</b>											
EP030: Biochemical Oxygen Demand	----	2	mg/L	----	198 mg/L	93.9	----	78	110	----	----

**Matrix Spike (MS) and Matrix Spike Duplicate (MSD) Report**

- No Matrix Spike (MS) or Matrix Spike Duplicate (MSD) Results are required to be reported.



## CERTIFICATE OF ANALYSIS

<i>Client</i>	: ENOVATIVE ENVIRONMENTAL SERVICE LTD	<i>Laboratory</i>	: ALS Technichem HK Pty Ltd	<i>Page</i>	: 1 of 3
<i>Contact</i>	: MR THOMAS WONG	<i>Contact</i>	: Fung Lim Chee, Richard	<i>Work Order</i>	: <b>HK1424646</b>
<i>Address</i>	: RM811, HIN PUI HOUSE, HIN KENG ESTATE, TAI WAI, N.T. HONG KONG	<i>Address</i>	: 11/F., Chung Shun Knitting Centre, 1 - 3 Wing Yip Street, Kwai Chung, N.T., Hong Kong		
<i>E-mail</i>	: Thomas.wong@eno.com.hk	<i>E-mail</i>	: Richard.Fung@alsglobal.com		
<i>Telephone</i>	: ----	<i>Telephone</i>	: +852 2610 1044		
<i>Facsimile</i>	: ----	<i>Facsimile</i>	: +852 2610 2021		
<i>Project</i>	: PROPOSED COMPREHENSIVE DEVELOPMENT AT WO SHANG WAI YUEN LONG	<i>Quote number</i>	: HK/1577/2009**	<i>Date received</i>	: 04-AUG-2014
<i>Order number</i>	: ----			<i>Date of issue</i>	: 12-AUG-2014
<i>C-O-C number</i>	: ----			<i>No. of samples</i>	- Received : 8
<i>Site</i>	: ----				- Analysed : 8

### Report Comments

This report for ALS Technichem (HK) Pty Ltd work order reference HK1424646 supersedes any previous reports with this reference. The completion date of analysis is 11-AUG-2014. Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release. When date(s) and/or time(s) are shown bracketed, these have been assumed by the laboratory for process purposes. Abbreviations: CAS number = Chemical Abstract Services number. LOR = Limit of reporting.

Specific comments for Work Order HK1424646 :  
Sample(s) were received in a chilled condition.  
Water sample(s) analysed and reported on an as received basis.

This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.

This document has been electronically signed by those names that appear on this report and are the authorised signatories. Electronic signing has been carried out in compliance with procedures specified in the 'Electronic Transactions Ordinance' of Hong Kong, Chapter 553, Section 6.

<u>Signatory</u>	<u>Position</u>	<u>Authorised results for:-</u>
Fung Lim Chee, Richard	General Manager	Inorganics



**Analytical Results**

Sub-Matrix: WATER

			Compound	EA025: Suspended Solids (SS)	EP030: Biochemical Oxygen Demand		
			LOR Unit	2 mg/L	2 mg/L		
Client sample ID	Client sampling date / time	Laboratory sample ID		EA/ED: Physical and Aggregate Properties	EP: Aggregate Organics		
MP3-1	[04-AUG-2014]	HK1424646-001		12	3		
MP3-2	[04-AUG-2014]	HK1424646-002		12	3		
MP4-1	[04-AUG-2014]	HK1424646-003		23	4		
MP4-2	[04-AUG-2014]	HK1424646-004		23	4		
MP5-1	[04-AUG-2014]	HK1424646-005		23	4		
MP5-2	[04-AUG-2014]	HK1424646-006		23	4		
MP6-1	[04-AUG-2014]	HK1424646-007		25	4		
MP6-2	[04-AUG-2014]	HK1424646-008		25	4		



**Laboratory Duplicate (DUP) Report**

Matrix: WATER

				Laboratory Duplicate (DUP) Report				
Laboratory sample ID	Client sample ID	Method: Compound	CAS Number	LOR	Unit	Original Result	Duplicate Result	RPD (%)
<b>EA/ED: Physical and Aggregate Properties (QC Lot: 3577196)</b>								
HK1424567-001	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	6	6	0.0
HK1424633-008	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	396	399	0.7

**Method Blank (MB), Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report**

Matrix: WATER

			Method Blank (MB) Report			Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report					
Method: Compound	CAS Number	LOR	Unit	Result	Spike Concentration	Spike Recovery (%)		Recovery Limits (%)		RPDs (%)	
						LCS	DCS	Low	High	Value	Control Limit
<b>EA/ED: Physical and Aggregate Properties (QCLot: 3577196)</b>											
EA025: Suspended Solids (SS)	----	2	mg/L	<2	10 mg/L	102	----	92	108	----	----
<b>EP: Aggregate Organics (QCLot: 3577688)</b>											
EP030: Biochemical Oxygen Demand	----	2	mg/L	----	198 mg/L	87.3	----	78	110	----	----

**Matrix Spike (MS) and Matrix Spike Duplicate (MSD) Report**

- No Matrix Spike (MS) or Matrix Spike Duplicate (MSD) Results are required to be reported.



## CERTIFICATE OF ANALYSIS

<i>Client</i>	: ENOVATIVE ENVIRONMENTAL SERVICE LTD	<i>Laboratory</i>	: ALS Technichem HK Pty Ltd	<i>Page</i>	: 1 of 3
<i>Contact</i>	: MR THOMAS WONG	<i>Contact</i>	: Fung Lim Chee, Richard	<i>Work Order</i>	: <b>HK1425024</b>
<i>Address</i>	: RM811, HIN PUI HOUSE, HIN KENG ESTATE, TAI WAI, N.T. HONG KONG	<i>Address</i>	: 11/F., Chung Shun Knitting Centre, 1 - 3 Wing Yip Street, Kwai Chung, N.T., Hong Kong		
<i>E-mail</i>	: Thomas.wong@eno.com.hk	<i>E-mail</i>	: Richard.Fung@alsglobal.com		
<i>Telephone</i>	: ----	<i>Telephone</i>	: +852 2610 1044		
<i>Facsimile</i>	: ----	<i>Facsimile</i>	: +852 2610 2021		
<i>Project</i>	: PROPOSED COMPREHENSIVE DEVELOPMENT AT WO SHANG WAI YUEN LONG	<i>Quote number</i>	: HK/1577/2009**	<i>Date received</i>	: 06-AUG-2014
<i>Order number</i>	: ----			<i>Date of issue</i>	: 15-AUG-2014
<i>C-O-C number</i>	: ----			<i>No. of samples</i>	- Received : 8
<i>Site</i>	: ----				- Analysed : 8

### Report Comments

This report for ALS Technichem (HK) Pty Ltd work order reference HK1425024 supersedes any previous reports with this reference. The completion date of analysis is 13-AUG-2014. Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release. When date(s) and/or time(s) are shown bracketed, these have been assumed by the laboratory for process purposes. Abbreviations: CAS number = Chemical Abstract Services number. LOR = Limit of reporting.

Specific comments for Work Order HK1425024 :  
Sample(s) were received in a chilled condition.  
Water sample(s) analysed and reported on an as received basis.

This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.

This document has been electronically signed by those names that appear on this report and are the authorised signatories. Electronic signing has been carried out in compliance with procedures specified in the 'Electronic Transactions Ordinance' of Hong Kong, Chapter 553, Section 6.

<u>Signatory</u>	<u>Position</u>	<u>Authorised results for:-</u>
Fung Lim Chee, Richard	General Manager	Inorganics



**Analytical Results**

Sub-Matrix: WATER

			Compound	EA025: Suspended Solids (SS)	EP030: Biochemical Oxygen Demand		
			LOR Unit	2 mg/L	2 mg/L		
Client sample ID	Client sampling date / time	Laboratory sample ID		EA/ED: Physical and Aggregate Properties	EP: Aggregate Organics		
MP3-1	[06-AUG-2014]	HK1425024-001		14	<2		
MP3-2	[06-AUG-2014]	HK1425024-002		14	2		
MP4-1	[06-AUG-2014]	HK1425024-003		34	3		
MP4-2	[06-AUG-2014]	HK1425024-004		33	2		
MP5-1	[06-AUG-2014]	HK1425024-005		34	2		
MP5-2	[06-AUG-2014]	HK1425024-006		34	3		
MP6-1	[06-AUG-2014]	HK1425024-007		31	3		
MP6-2	[06-AUG-2014]	HK1425024-008		32	3		





**Laboratory Duplicate (DUP) Report**

Matrix: WATER

				Laboratory Duplicate (DUP) Report				
Laboratory sample ID	Client sample ID	Method: Compound	CAS Number	LOR	Unit	Original Result	Duplicate Result	RPD (%)
<b>EA/ED: Physical and Aggregate Properties (QC Lot: 3583343)</b>								
HK1424162-001	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	4	4	0.0
HK1425024-002	MP3-2	EA025: Suspended Solids (SS)	----	2	mg/L	14	15	0.0

**Method Blank (MB), Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report**

Matrix: WATER

			Method Blank (MB) Report			Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report					
Method: Compound	CAS Number	LOR	Unit	Result	Spike Concentration	Spike Recovery (%)		Recovery Limits (%)		RPDs (%)	
						LCS	DCS	Low	High	Value	Control Limit
<b>EA/ED: Physical and Aggregate Properties (QCLot: 3583343)</b>											
EA025: Suspended Solids (SS)	----	2	mg/L	<2	10 mg/L	98.5	----	92	108	----	----
<b>EP: Aggregate Organics (QCLot: 3583776)</b>											
EP030: Biochemical Oxygen Demand	----	2	mg/L	----	198 mg/L	103	----	78	110	----	----

**Matrix Spike (MS) and Matrix Spike Duplicate (MSD) Report**

- No Matrix Spike (MS) or Matrix Spike Duplicate (MSD) Results are required to be reported.



## CERTIFICATE OF ANALYSIS

<i>Client</i>	: ENOVATIVE ENVIRONMENTAL SERVICE LTD	<i>Laboratory</i>	: ALS Technichem HK Pty Ltd	<i>Page</i>	: 1 of 3
<i>Contact</i>	: MR THOMAS WONG	<i>Contact</i>	: Fung Lim Chee, Richard	<i>Work Order</i>	: <b>HK1425481</b>
<i>Address</i>	: RM811, HIN PUI HOUSE, HIN KENG ESTATE, TAI WAI, N.T. HONG KONG	<i>Address</i>	: 11/F., Chung Shun Knitting Centre, 1 - 3 Wing Yip Street, Kwai Chung, N.T., Hong Kong		
<i>E-mail</i>	: Thomas.wong@eno.com.hk	<i>E-mail</i>	: Richard.Fung@alsglobal.com		
<i>Telephone</i>	: ----	<i>Telephone</i>	: +852 2610 1044		
<i>Facsimile</i>	: ----	<i>Facsimile</i>	: +852 2610 2021		
<i>Project</i>	: PROPOSED COMPREHENSIVE DEVELOPMENT AT WO SHANG WAI YUEN LONG	<i>Quote number</i>	: HK/1577/2009**	<i>Date received</i>	: 08-AUG-2014
<i>Order number</i>	: ----			<i>Date of issue</i>	: 19-AUG-2014
<i>C-O-C number</i>	: ----			<i>No. of samples</i>	- Received : 8
<i>Site</i>	: ----				- Analysed : 8

### Report Comments

This report for ALS Technichem (HK) Pty Ltd work order reference HK1425481 supersedes any previous reports with this reference. The completion date of analysis is 13-AUG-2014. Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release. When date(s) and/or time(s) are shown bracketed, these have been assumed by the laboratory for process purposes. Abbreviations: CAS number = Chemical Abstract Services number. LOR = Limit of reporting.

Specific comments for Work Order HK1425481 :  
Sample(s) were received in a chilled condition.  
Water sample(s) analysed and reported on an as received basis.

This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.

This document has been electronically signed by those names that appear on this report and are the authorised signatories. Electronic signing has been carried out in compliance with procedures specified in the 'Electronic Transactions Ordinance' of Hong Kong, Chapter 553, Section 6.

<u>Signatory</u>	<u>Position</u>	<u>Authorised results for:-</u>
Fung Lim Chee, Richard	General Manager	Inorganics



**Analytical Results**

Sub-Matrix: WATER

			Compound	EA025: Suspended Solids (SS)	EP030: Biochemical Oxygen Demand			
			LOR Unit	2 mg/L	2 mg/L			
Client sample ID	Client sampling date / time	Laboratory sample ID		EA/ED: Physical and Aggregate Properties	EP: Aggregate Organics			
MP3-1	[08-AUG-2014]	HK1425481-001		6	4			
MP3-2	[08-AUG-2014]	HK1425481-002		15	4			
MP4-1	[08-AUG-2014]	HK1425481-003		25	3			
MP4-2	[08-AUG-2014]	HK1425481-004		14	3			
MP5-1	[08-AUG-2014]	HK1425481-005		16	3			
MP5-2	[08-AUG-2014]	HK1425481-006		14	3			
MP6-1	[08-AUG-2014]	HK1425481-007		17	3			
MP6-2	[08-AUG-2014]	HK1425481-008		16	3			



**Laboratory Duplicate (DUP) Report**

Matrix: WATER

				Laboratory Duplicate (DUP) Report				
Laboratory sample ID	Client sample ID	Method: Compound	CAS Number	LOR	Unit	Original Result	Duplicate Result	RPD (%)
<b>EA/ED: Physical and Aggregate Properties (QC Lot: 3584682)</b>								
HK1425468-005	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	<2	<2	0.0
HK1425468-015	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	18	18	0.0

**Method Blank (MB), Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report**

Matrix: WATER

			Method Blank (MB) Report			Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report					
Method: Compound	CAS Number	LOR	Unit	Result	Spike Concentration	Spike Recovery (%)		Recovery Limits (%)		RPDs (%)	
						LCS	DCS	Low	High	Value	Control Limit
<b>EA/ED: Physical and Aggregate Properties (QCLot: 3584682)</b>											
EA025: Suspended Solids (SS)	----	2	mg/L	<2	10 mg/L	101	----	92	108	----	----
<b>EP: Aggregate Organics (QCLot: 3587951)</b>											
EP030: Biochemical Oxygen Demand	----	2	mg/L	----	198 mg/L	85.8	----	78	110	----	----

**Matrix Spike (MS) and Matrix Spike Duplicate (MSD) Report**

- No Matrix Spike (MS) or Matrix Spike Duplicate (MSD) Results are required to be reported.



## CERTIFICATE OF ANALYSIS

<i>Client</i>	: ENOVATIVE ENVIRONMENTAL SERVICE LTD	<i>Laboratory</i>	: ALS Technichem HK Pty Ltd	<i>Page</i>	: 1 of 3
<i>Contact</i>	: MR THOMAS WONG	<i>Contact</i>	: Fung Lim Chee, Richard	<i>Work Order</i>	: <b>HK1425676</b>
<i>Address</i>	: RM811, HIN PUI HOUSE, HIN KENG ESTATE, TAI WAI, N.T. HONG KONG	<i>Address</i>	: 11/F., Chung Shun Knitting Centre, 1 - 3 Wing Yip Street, Kwai Chung, N.T., Hong Kong		
<i>E-mail</i>	: Thomas.wong@eno.com.hk	<i>E-mail</i>	: Richard.Fung@alsglobal.com		
<i>Telephone</i>	: ----	<i>Telephone</i>	: +852 2610 1044		
<i>Facsimile</i>	: ----	<i>Facsimile</i>	: +852 2610 2021		
<i>Project</i>	: PROPOSED COMPREHENSIVE DEVELOPMENT AT WO SHANG WAI YUEN LONG	<i>Quote number</i>	: HK/1577/2009**	<i>Date received</i>	: 11-AUG-2014
<i>Order number</i>	: ----			<i>Date of issue</i>	: 20-AUG-2014
<i>C-O-C number</i>	: ----			<i>No. of samples</i>	- Received : 8
<i>Site</i>	: ----				- Analysed : 8

### Report Comments

This report for ALS Technichem (HK) Pty Ltd work order reference HK1425676 supersedes any previous reports with this reference. The completion date of analysis is 18-AUG-2014. Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release. When date(s) and/or time(s) are shown bracketed, these have been assumed by the laboratory for process purposes. Abbreviations: CAS number = Chemical Abstract Services number. LOR = Limit of reporting.

Specific comments for Work Order HK1425676 :  
Sample(s) were received in a chilled condition.  
Water sample(s) analysed and reported on an as received basis.

This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.

This document has been electronically signed by those names that appear on this report and are the authorised signatories. Electronic signing has been carried out in compliance with procedures specified in the 'Electronic Transactions Ordinance' of Hong Kong, Chapter 553, Section 6.

<u>Signatory</u>	<u>Position</u>	<u>Authorised results for:-</u>
Fung Lim Chee, Richard	General Manager	Inorganics



**Analytical Results**

Sub-Matrix: WATER

			Compound	EA025: Suspended Solids (SS)	EP030: Biochemical Oxygen Demand		
			LOR Unit	2 mg/L	2 mg/L		
Client sample ID	Client sampling date / time	Laboratory sample ID		EA/ED: Physical and Aggregate Properties	EP: Aggregate Organics		
MP3-1	[11-AUG-2014]	HK1425676-001		26	2		
MP3-2	[11-AUG-2014]	HK1425676-002		28	3		
MP4-1	[11-AUG-2014]	HK1425676-003		21	4		
MP4-2	[11-AUG-2014]	HK1425676-004		20	4		
MP5-1	[11-AUG-2014]	HK1425676-005		20	3		
MP5-2	[11-AUG-2014]	HK1425676-006		19	3		
MP6-1	[11-AUG-2014]	HK1425676-007		24	3		
MP6-2	[11-AUG-2014]	HK1425676-008		26	3		



**Laboratory Duplicate (DUP) Report**

Matrix: WATER

				Laboratory Duplicate (DUP) Report				
Laboratory sample ID	Client sample ID	Method: Compound	CAS Number	LOR	Unit	Original Result	Duplicate Result	RPD (%)
<b>EA/ED: Physical and Aggregate Properties (QC Lot: 3586862)</b>								
HK1425666-001	Anonymous	EA025: Suspended Solids (SS)	----	0.1	mg/L	4	5	0.0
HK1425680-001	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	<2	<2	0.0

**Method Blank (MB), Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report**

Matrix: WATER

			Method Blank (MB) Report			Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report					
Method: Compound	CAS Number	LOR	Unit	Result	Spike Concentration	Spike Recovery (%)		Recovery Limits (%)		RPDs (%)	
						LCS	DCS	Low	High	Value	Control Limit
<b>EA/ED: Physical and Aggregate Properties (QCLot: 3586862)</b>											
EA025: Suspended Solids (SS)	----	2	mg/L	<2	10 mg/L	104	----	92	108	----	----
<b>EP: Aggregate Organics (QCLot: 3587965)</b>											
EP030: Biochemical Oxygen Demand	----	2	mg/L	----	198 mg/L	94.7	----	78	110	----	----

**Matrix Spike (MS) and Matrix Spike Duplicate (MSD) Report**

- No Matrix Spike (MS) or Matrix Spike Duplicate (MSD) Results are required to be reported.





## CERTIFICATE OF ANALYSIS

<i>Client</i>	: ENOVATIVE ENVIRONMENTAL SERVICE LTD	<i>Laboratory</i>	: ALS Technichem HK Pty Ltd	<i>Page</i>	: 1 of 3
<i>Contact</i>	: MR THOMAS WONG	<i>Contact</i>	: Fung Lim Chee, Richard	<i>Work Order</i>	: <b>HK1426108</b>
<i>Address</i>	: RM811, HIN PUI HOUSE, HIN KENG ESTATE, TAI WAI, N.T. HONG KONG	<i>Address</i>	: 11/F., Chung Shun Knitting Centre, 1 - 3 Wing Yip Street, Kwai Chung, N.T., Hong Kong		
<i>E-mail</i>	: Thomas.wong@eno.com.hk	<i>E-mail</i>	: Richard.Fung@alsglobal.com		
<i>Telephone</i>	: ----	<i>Telephone</i>	: +852 2610 1044		
<i>Facsimile</i>	: ----	<i>Facsimile</i>	: +852 2610 2021		
<i>Project</i>	: PROPOSED COMPREHENSIVE DEVELOPMENT AT WO SHANG WAI YUEN LONG	<i>Quote number</i>	: HK/1577/2009**	<i>Date received</i>	: 13-AUG-2014
<i>Order number</i>	: ----			<i>Date of issue</i>	: 22-AUG-2014
<i>C-O-C number</i>	: ----			<i>No. of samples</i>	- Received : 8
<i>Site</i>	: ----				- Analysed : 8

### Report Comments

This report for ALS Technichem (HK) Pty Ltd work order reference HK1426108 supersedes any previous reports with this reference. The completion date of analysis is 18-AUG-2014. Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release. When date(s) and/or time(s) are shown bracketed, these have been assumed by the laboratory for process purposes. Abbreviations: CAS number = Chemical Abstract Services number. LOR = Limit of reporting.

Specific comments for Work Order HK1426108 :  
Sample(s) were received in a chilled condition.  
Water sample(s) analysed and reported on an as received basis.

This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.

This document has been electronically signed by those names that appear on this report and are the authorised signatories. Electronic signing has been carried out in compliance with procedures specified in the 'Electronic Transactions Ordinance' of Hong Kong, Chapter 553, Section 6.

<u>Signatory</u>	<u>Position</u>	<u>Authorised results for:-</u>
Fung Lim Chee, Richard	General Manager	Inorganics



**Analytical Results**

Sub-Matrix: WATER

			Compound	EA025: Suspended Solids (SS)	EP030: Biochemical Oxygen Demand		
			LOR Unit	2 mg/L	2 mg/L		
Client sample ID	Client sampling date / time	Laboratory sample ID		EA/ED: Physical and Aggregate Properties	EP: Aggregate Organics		
MP3-1	[13-AUG-2014]	HK1426108-001		27	2		
MP3-2	[13-AUG-2014]	HK1426108-002		29	2		
MP4-1	[13-AUG-2014]	HK1426108-003		39	3		
MP4-2	[13-AUG-2014]	HK1426108-004		41	3		
MP5-1	[13-AUG-2014]	HK1426108-005		38	3		
MP5-2	[13-AUG-2014]	HK1426108-006		38	3		
MP6-1	[13-AUG-2014]	HK1426108-007		38	3		
MP6-2	[13-AUG-2014]	HK1426108-008		37	3		



**Laboratory Duplicate (DUP) Report**

Matrix: WATER

				Laboratory Duplicate (DUP) Report				
Laboratory sample ID	Client sample ID	Method: Compound	CAS Number	LOR	Unit	Original Result	Duplicate Result	RPD (%)
<b>EA/ED: Physical and Aggregate Properties (QC Lot: 3592693)</b>								
HK1426100-001	Anonymous	EA025: Suspended Solids (SS)	----	3	mg/L	<3	<3	0.0
HK1426108-005	MP5-1	EA025: Suspended Solids (SS)	----	2	mg/L	38	39	0.0

**Method Blank (MB), Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report**

Matrix: WATER

			Method Blank (MB) Report			Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report					
Method: Compound	CAS Number	LOR	Unit	Result	Spike Concentration	Spike Recovery (%)		Recovery Limits (%)		RPDs (%)	
						LCS	DCS	Low	High	Value	Control Limit
<b>EA/ED: Physical and Aggregate Properties (QCLot: 3592693)</b>											
EA025: Suspended Solids (SS)	----	2	mg/L	<2	10 mg/L	100	----	92	108	----	----
<b>EP: Aggregate Organics (QCLot: 3593545)</b>											
EP030: Biochemical Oxygen Demand	----	2	mg/L	----	198 mg/L	89.5	----	78	110	----	----

**Matrix Spike (MS) and Matrix Spike Duplicate (MSD) Report**

- No Matrix Spike (MS) or Matrix Spike Duplicate (MSD) Results are required to be reported.



## CERTIFICATE OF ANALYSIS

<i>Client</i>	: ENOVATIVE ENVIRONMENTAL SERVICE LTD	<i>Laboratory</i>	: ALS Technichem HK Pty Ltd	<i>Page</i>	: 1 of 3
<i>Contact</i>	: MR THOMAS WONG	<i>Contact</i>	: Fung Lim Chee, Richard	<i>Work Order</i>	: <b>HK1426414</b>
<i>Address</i>	: RM811, HIN PUI HOUSE, HIN KENG ESTATE, TAI WAI, N.T. HONG KONG	<i>Address</i>	: 11/F., Chung Shun Knitting Centre, 1 - 3 Wing Yip Street, Kwai Chung, N.T., Hong Kong		
<i>E-mail</i>	: Thomas.wong@eno.com.hk	<i>E-mail</i>	: Richard.Fung@alsglobal.com		
<i>Telephone</i>	: ----	<i>Telephone</i>	: +852 2610 1044		
<i>Facsimile</i>	: ----	<i>Facsimile</i>	: +852 2610 2021		
<i>Project</i>	: PROPOSED COMPREHENSIVE DEVELOPMENT AT WO SHANG WAI YUEN LONG	<i>Quote number</i>	: HK/1577/2009**	<i>Date received</i>	: 15-AUG-2014
<i>Order number</i>	: ----			<i>Date of issue</i>	: 26-AUG-2014
<i>C-O-C number</i>	: ----			<i>No. of samples</i>	- Received : 8
<i>Site</i>	: ----				- Analysed : 8

### Report Comments

This report for ALS Technichem (HK) Pty Ltd work order reference HK1426414 supersedes any previous reports with this reference. The completion date of analysis is 22-AUG-2014. Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release. When date(s) and/or time(s) are shown bracketed, these have been assumed by the laboratory for process purposes. Abbreviations: CAS number = Chemical Abstract Services number. LOR = Limit of reporting.

Specific comments for Work Order HK1426414 :  
Sample(s) were received in a chilled condition.  
Water sample(s) analysed and reported on an as received basis.

This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.

This document has been electronically signed by those names that appear on this report and are the authorised signatories. Electronic signing has been carried out in compliance with procedures specified in the 'Electronic Transactions Ordinance' of Hong Kong, Chapter 553, Section 6.

<u>Signatory</u>	<u>Position</u>	<u>Authorised results for:-</u>
Fung Lim Chee, Richard	General Manager	Inorganics



**Analytical Results**

Sub-Matrix: WATER

			Compound	EA025: Suspended Solids (SS)	EP030: Biochemical Oxygen Demand		
			LOR Unit	2 mg/L	2 mg/L		
Client sample ID	Client sampling date / time	Laboratory sample ID		EA/ED: Physical and Aggregate Properties	EP: Aggregate Organics		
MP3-1	[15-AUG-2014]	HK1426414-001		17	2		
MP3-2	[15-AUG-2014]	HK1426414-002		18	<2		
MP4-1	[15-AUG-2014]	HK1426414-003		13	<2		
MP4-2	[15-AUG-2014]	HK1426414-004		12	<2		
MP5-1	[15-AUG-2014]	HK1426414-005		15	<2		
MP5-2	[15-AUG-2014]	HK1426414-006		15	<2		
MP6-1	[15-AUG-2014]	HK1426414-007		14	<2		
MP6-2	[15-AUG-2014]	HK1426414-008		15	<2		



**Laboratory Duplicate (DUP) Report**

Matrix: WATER

				Laboratory Duplicate (DUP) Report				
Laboratory sample ID	Client sample ID	Method: Compound	CAS Number	LOR	Unit	Original Result	Duplicate Result	RPD (%)
<b>EA/ED: Physical and Aggregate Properties (QC Lot: 3600563)</b>								
HK1426414-001	MP3-1	EA025: Suspended Solids (SS)	----	2	mg/L	17	18	0.0
HK1426460-003	Anonymous	EA025: Suspended Solids (SS)	----	3	mg/L	6	6	0.0

**Method Blank (MB), Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report**

Matrix: WATER

		Method Blank (MB) Report			Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report						
Method: Compound	CAS Number	LOR	Unit	Result	Spike Concentration	Spike Recovery (%)		Recovery Limits (%)		RPDs (%)	
						LCS	DCS	Low	High	Value	Control Limit
<b>EA/ED: Physical and Aggregate Properties (QCLot: 3600563)</b>											
EA025: Suspended Solids (SS)	----	2	mg/L	<2	10 mg/L	99.5	----	92	108	----	----
<b>EP: Aggregate Organics (QCLot: 3595346)</b>											
EP030: Biochemical Oxygen Demand	----	2	mg/L	----	198 mg/L	94.8	----	78	110	----	----

**Matrix Spike (MS) and Matrix Spike Duplicate (MSD) Report**

- No Matrix Spike (MS) or Matrix Spike Duplicate (MSD) Results are required to be reported.



## CERTIFICATE OF ANALYSIS

<i>Client</i>	: ENOVATIVE ENVIRONMENTAL SERVICE LTD	<i>Laboratory</i>	: ALS Technichem HK Pty Ltd	<i>Page</i>	: 1 of 3
<i>Contact</i>	: MR THOMAS WONG	<i>Contact</i>	: Fung Lim Chee, Richard	<i>Work Order</i>	: <b>HK1426850</b>
<i>Address</i>	: RM811, HIN PUI HOUSE, HIN KENG ESTATE, TAI WAI, N.T. HONG KONG	<i>Address</i>	: 11/F., Chung Shun Knitting Centre, 1 - 3 Wing Yip Street, Kwai Chung, N.T., Hong Kong		
<i>E-mail</i>	: Thomas.wong@eno.com.hk	<i>E-mail</i>	: Richard.Fung@alsglobal.com		
<i>Telephone</i>	: ----	<i>Telephone</i>	: +852 2610 1044		
<i>Facsimile</i>	: ----	<i>Facsimile</i>	: +852 2610 2021		
<i>Project</i>	: PROPOSED COMPREHENSIVE DEVELOPMENT AT WO SHANG WAI YUEN LONG	<i>Quote number</i>	: HK/1577/2009**	<i>Date received</i>	: 19-AUG-2014
<i>Order number</i>	: ----			<i>Date of issue</i>	: 28-AUG-2014
<i>C-O-C number</i>	: ----			<i>No. of samples</i>	- Received : 8
<i>Site</i>	: ----				- Analysed : 8

### Report Comments

This report for ALS Technichem (HK) Pty Ltd work order reference HK1426850 supersedes any previous reports with this reference. The completion date of analysis is 25-AUG-2014. Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release. When date(s) and/or time(s) are shown bracketed, these have been assumed by the laboratory for process purposes. Abbreviations: CAS number = Chemical Abstract Services number. LOR = Limit of reporting.

Specific comments for Work Order HK1426850 :  
Sample(s) were received in a chilled condition.  
Water sample(s) analysed and reported on an as received basis.

This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.

This document has been electronically signed by those names that appear on this report and are the authorised signatories. Electronic signing has been carried out in compliance with procedures specified in the 'Electronic Transactions Ordinance' of Hong Kong, Chapter 553, Section 6.

<u>Signatory</u>	<u>Position</u>	<u>Authorised results for:-</u>
Fung Lim Chee, Richard	General Manager	Inorganics



**Analytical Results**

Sub-Matrix: WATER

			Compound	EA025: Suspended Solids (SS)	EP030: Biochemical Oxygen Demand		
			LOR Unit	2 mg/L	2 mg/L		
Client sample ID	Client sampling date / time	Laboratory sample ID		EA/ED: Physical and Aggregate Properties	EP: Aggregate Organics		
MP3-1	[18-AUG-2014]	HK1426850-001		18	3		
MP3-2	[18-AUG-2014]	HK1426850-002		18	2		
MP4-1	[18-AUG-2014]	HK1426850-003		38	3		
MP4-2	[18-AUG-2014]	HK1426850-004		38	3		
MP5-1	[18-AUG-2014]	HK1426850-005		40	3		
MP5-2	[18-AUG-2014]	HK1426850-006		41	3		
MP6-1	[18-AUG-2014]	HK1426850-007		43	3		
MP6-2	[18-AUG-2014]	HK1426850-008		43	3		





**Laboratory Duplicate (DUP) Report**

Matrix: WATER				Laboratory Duplicate (DUP) Report				
Laboratory sample ID	Client sample ID	Method: Compound	CAS Number	LOR	Unit	Original Result	Duplicate Result	RPD (%)
<b>EA/ED: Physical and Aggregate Properties (QC Lot: 3600567)</b>								
HK1426573-001	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	<2	<2	0.0
HK1426850-004	MP4-2	EA025: Suspended Solids (SS)	----	2	mg/L	38	39	0.0

**Method Blank (MB), Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report**

Matrix: WATER			Method Blank (MB) Report			Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report					
Method: Compound	CAS Number	LOR	Unit	Result	Spike Concentration	Spike Recovery (%)		Recovery Limits (%)		RPDs (%)	
						LCS	DCS	Low	High	Value	Control Limit
<b>EA/ED: Physical and Aggregate Properties (QCLot: 3600567)</b>											
EA025: Suspended Solids (SS)	----	2	mg/L	<2	10 mg/L	96.5	----	92	108	----	----
<b>EP: Aggregate Organics (QCLot: 3598956)</b>											
EP030: Biochemical Oxygen Demand	----	2	mg/L	----	198 mg/L	89.7	----	78	110	----	----

**Matrix Spike (MS) and Matrix Spike Duplicate (MSD) Report**

- No Matrix Spike (MS) or Matrix Spike Duplicate (MSD) Results are required to be reported.



## CERTIFICATE OF ANALYSIS

<i>Client</i>	: ENOVATIVE ENVIRONMENTAL SERVICE LTD	<i>Laboratory</i>	: ALS Technichem HK Pty Ltd	<i>Page</i>	: 1 of 3
<i>Contact</i>	: MR THOMAS WONG	<i>Contact</i>	: Fung Lim Chee, Richard	<i>Work Order</i>	: <b>HK1427034</b>
<i>Address</i>	: RM811, HIN PUI HOUSE, HIN KENG ESTATE, TAI WAI, N.T. HONG KONG	<i>Address</i>	: 11/F., Chung Shun Knitting Centre, 1 - 3 Wing Yip Street, Kwai Chung, N.T., Hong Kong		
<i>E-mail</i>	: Thomas.wong@eno.com.hk	<i>E-mail</i>	: Richard.Fung@alsglobal.com		
<i>Telephone</i>	: ----	<i>Telephone</i>	: +852 2610 1044		
<i>Facsimile</i>	: ----	<i>Facsimile</i>	: +852 2610 2021		
<i>Project</i>	: PROPOSED COMPREHENSIVE DEVELOPMENT AT WO SHANG WAI YUEN LONG	<i>Quote number</i>	: HK/1577/2009**	<i>Date received</i>	: 20-AUG-2014
<i>Order number</i>	: ----			<i>Date of issue</i>	: 28-AUG-2014
<i>C-O-C number</i>	: ----			<i>No. of samples</i>	- Received : 8
<i>Site</i>	: ----				- Analysed : 8

### Report Comments

This report for ALS Technichem (HK) Pty Ltd work order reference HK1427034 supersedes any previous reports with this reference. The completion date of analysis is 26-AUG-2014. Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release. When date(s) and/or time(s) are shown bracketed, these have been assumed by the laboratory for process purposes. Abbreviations: CAS number = Chemical Abstract Services number. LOR = Limit of reporting.

Specific comments for Work Order HK1427034 :  
Sample(s) were received in a chilled condition.  
Water sample(s) analysed and reported on an as received basis.

This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.

This document has been electronically signed by those names that appear on this report and are the authorised signatories. Electronic signing has been carried out in compliance with procedures specified in the 'Electronic Transactions Ordinance' of Hong Kong, Chapter 553, Section 6.

<u>Signatory</u>	<u>Position</u>	<u>Authorised results for:-</u>
Fung Lim Chee, Richard	General Manager	Inorganics



**Analytical Results**

Sub-Matrix: WATER

			Compound	EA025: Suspended Solids (SS)	EP030: Biochemical Oxygen Demand		
			LOR Unit	2 mg/L	2 mg/L		
Client sample ID	Client sampling date / time	Laboratory sample ID		EA/ED: Physical and Aggregate Properties	EP: Aggregate Organics		
MP3-1	[20-AUG-2014]	HK1427034-001		23	3		
MP3-2	[20-AUG-2014]	HK1427034-002		22	2		
MP4-1	[20-AUG-2014]	HK1427034-003		16	3		
MP4-2	[20-AUG-2014]	HK1427034-004		17	3		
MP5-1	[20-AUG-2014]	HK1427034-005		14	2		
MP5-2	[20-AUG-2014]	HK1427034-006		14	3		
MP6-1	[20-AUG-2014]	HK1427034-007		13	3		
MP6-2	[20-AUG-2014]	HK1427034-008		14	3		



**Laboratory Duplicate (DUP) Report**

Matrix: WATER

				Laboratory Duplicate (DUP) Report				
Laboratory sample ID	Client sample ID	Method: Compound	CAS Number	LOR	Unit	Original Result	Duplicate Result	RPD (%)
<b>EA/ED: Physical and Aggregate Properties (QC Lot: 3604867)</b>								
HK1427029-001	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	<2	<2	0.0
HK1427044-002	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	<2	<2	0.0

**Method Blank (MB), Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report**

Matrix: WATER

			Method Blank (MB) Report			Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report					
Method: Compound	CAS Number	LOR	Unit	Result	Spike Concentration	Spike Recovery (%)		Recovery Limits (%)		RPDs (%)	
						LCS	DCS	Low	High	Value	Control Limit
<b>EA/ED: Physical and Aggregate Properties (QCLot: 3604867)</b>											
EA025: Suspended Solids (SS)	----	2	mg/L	<2	10 mg/L	98.5	----	92	108	----	----
<b>EP: Aggregate Organics (QCLot: 3602194)</b>											
EP030: Biochemical Oxygen Demand	----	2	mg/L	----	198 mg/L	89.1	----	78	110	----	----

**Matrix Spike (MS) and Matrix Spike Duplicate (MSD) Report**

- No Matrix Spike (MS) or Matrix Spike Duplicate (MSD) Results are required to be reported.



## CERTIFICATE OF ANALYSIS

<i>Client</i>	: ENOVATIVE ENVIRONMENTAL SERVICE LTD	<i>Laboratory</i>	: ALS Technichem HK Pty Ltd	<i>Page</i>	: 1 of 3
<i>Contact</i>	: MR THOMAS WONG	<i>Contact</i>	: Fung Lim Chee, Richard	<i>Work Order</i>	: <b>HK1427313</b>
<i>Address</i>	: RM811, HIN PUI HOUSE, HIN KENG ESTATE, TAI WAI, N.T. HONG KONG	<i>Address</i>	: 11/F., Chung Shun Knitting Centre, 1 - 3 Wing Yip Street, Kwai Chung, N.T., Hong Kong		
<i>E-mail</i>	: Thomas.wong@eno.com.hk	<i>E-mail</i>	: Richard.Fung@alsglobal.com		
<i>Telephone</i>	: ----	<i>Telephone</i>	: +852 2610 1044		
<i>Facsimile</i>	: ----	<i>Facsimile</i>	: +852 2610 2021		
<i>Project</i>	: PROPOSED COMPREHENSIVE DEVELOPMENT AT WO SHANG WAI YUEN LONG	<i>Quote number</i>	: HK/1577/2009**	<i>Date received</i>	: 22-AUG-2014
<i>Order number</i>	: ----			<i>Date of issue</i>	: 02-SEP-2014
<i>C-O-C number</i>	: ----			<i>No. of samples</i>	- Received : 8
<i>Site</i>	: ----				- Analysed : 8

### Report Comments

This report for ALS Technichem (HK) Pty Ltd work order reference HK1427313 supersedes any previous reports with this reference. The completion date of analysis is 27-AUG-2014. Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release. When date(s) and/or time(s) are shown bracketed, these have been assumed by the laboratory for process purposes. Abbreviations: CAS number = Chemical Abstract Services number. LOR = Limit of reporting.

Specific comments for Work Order HK1427313 :  
Sample(s) were received in a chilled condition.  
Water sample(s) analysed and reported on an as received basis.

This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.

This document has been electronically signed by those names that appear on this report and are the authorised signatories. Electronic signing has been carried out in compliance with procedures specified in the 'Electronic Transactions Ordinance' of Hong Kong, Chapter 553, Section 6.

<u>Signatory</u>	<u>Position</u>	<u>Authorised results for:-</u>
Fung Lim Chee, Richard	General Manager	Inorganics



**Analytical Results**

Sub-Matrix: WATER

			Compound	EA025: Suspended Solids (SS)	EP030: Biochemical Oxygen Demand		
			LOR Unit	2 mg/L	2 mg/L		
Client sample ID	Client sampling date / time	Laboratory sample ID		EA/ED: Physical and Aggregate Properties	EP: Aggregate Organics		
MP3-1	[22-AUG-2014]	HK1427313-001		10	3		
MP3-2	[22-AUG-2014]	HK1427313-002		11	3		
MP4-1	[22-AUG-2014]	HK1427313-003		18	2		
MP4-2	[22-AUG-2014]	HK1427313-004		18	<2		
MP5-1	[22-AUG-2014]	HK1427313-005		23	2		
MP5-2	[22-AUG-2014]	HK1427313-006		24	2		
MP6-1	[22-AUG-2014]	HK1427313-007		23	<2		
MP6-2	[22-AUG-2014]	HK1427313-008		24	2		



**Laboratory Duplicate (DUP) Report**

Matrix: WATER				Laboratory Duplicate (DUP) Report				
Laboratory sample ID	Client sample ID	Method: Compound	CAS Number	LOR	Unit	Original Result	Duplicate Result	RPD (%)
<b>EA/ED: Physical and Aggregate Properties (QC Lot: 3606747)</b>								
HK1427169-001	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	<2	<2	0.0
HK1427313-002	MP3-2	EA025: Suspended Solids (SS)	----	2	mg/L	11	11	0.0

**Method Blank (MB), Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report**

Matrix: WATER			Method Blank (MB) Report			Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report					
Method: Compound	CAS Number	LOR	Unit	Result	Spike Concentration	Spike Recovery (%)		Recovery Limits (%)		RPDs (%)	
						LCS	DCS	Low	High	Value	Control Limit
<b>EA/ED: Physical and Aggregate Properties (QCLot: 3606747)</b>											
EA025: Suspended Solids (SS)	----	2	mg/L	<2	10 mg/L	99.5	----	92	108	----	----
<b>EP: Aggregate Organics (QCLot: 3605082)</b>											
EP030: Biochemical Oxygen Demand	----	2	mg/L	----	198 mg/L	85.9	----	78	110	----	----

**Matrix Spike (MS) and Matrix Spike Duplicate (MSD) Report**

- No Matrix Spike (MS) or Matrix Spike Duplicate (MSD) Results are required to be reported.



## CERTIFICATE OF ANALYSIS

<i>Client</i>	: ENOVATIVE ENVIRONMENTAL SERVICE LTD	<i>Laboratory</i>	: ALS Technichem HK Pty Ltd	<i>Page</i>	: 1 of 3
<i>Contact</i>	: MR THOMAS WONG	<i>Contact</i>	: Fung Lim Chee, Richard	<i>Work Order</i>	: <b>HK1427549</b>
<i>Address</i>	: RM811, HIN PUI HOUSE, HIN KENG ESTATE, TAI WAI, N.T. HONG KONG	<i>Address</i>	: 11/F., Chung Shun Knitting Centre, 1 - 3 Wing Yip Street, Kwai Chung, N.T., Hong Kong		
<i>E-mail</i>	: Thomas.wong@eno.com.hk	<i>E-mail</i>	: Richard.Fung@alsglobal.com		
<i>Telephone</i>	: ----	<i>Telephone</i>	: +852 2610 1044		
<i>Facsimile</i>	: ----	<i>Facsimile</i>	: +852 2610 2021		
<i>Project</i>	: PROPOSED COMPREHENSIVE DEVELOPMENT AT WO SHANG WAI YUEN LONG	<i>Quote number</i>	: HK/1577/2009**	<i>Date received</i>	: 26-AUG-2014
<i>Order number</i>	: ----			<i>Date of issue</i>	: 03-SEP-2014
<i>C-O-C number</i>	: ----			<i>No. of samples</i>	- Received : 8
<i>Site</i>	: ----				- Analysed : 8

### Report Comments

This report for ALS Technichem (HK) Pty Ltd work order reference HK1427549 supersedes any previous reports with this reference. The completion date of analysis is 01-SEP-2014. Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release. When date(s) and/or time(s) are shown bracketed, these have been assumed by the laboratory for process purposes. Abbreviations: CAS number = Chemical Abstract Services number. LOR = Limit of reporting.

Specific comments for Work Order HK1427549 :  
Sample(s) were received in a chilled condition.  
Water sample(s) analysed and reported on an as received basis.

This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.

This document has been electronically signed by those names that appear on this report and are the authorised signatories. Electronic signing has been carried out in compliance with procedures specified in the 'Electronic Transactions Ordinance' of Hong Kong, Chapter 553, Section 6.

<u>Signatory</u>	<u>Position</u>	<u>Authorised results for:-</u>
Fung Lim Chee, Richard	General Manager	Inorganics





**Analytical Results**

Sub-Matrix: WATER

			Compound	EA025: Suspended Solids (SS)	EP030: Biochemical Oxygen Demand		
			LOR Unit	2 mg/L	2 mg/L		
Client sample ID	Client sampling date / time	Laboratory sample ID		EA/ED: Physical and Aggregate Properties	EP: Aggregate Organics		
MP3-1	[25-AUG-2014]	HK1427549-001		7	2		
MP3-2	[25-AUG-2014]	HK1427549-002		7	3		
MP4-1	[25-AUG-2014]	HK1427549-003		47	4		
MP4-2	[25-AUG-2014]	HK1427549-004		45	6		
MP5-1	[25-AUG-2014]	HK1427549-005		26	4		
MP5-2	[25-AUG-2014]	HK1427549-006		26	4		
MP6-1	[25-AUG-2014]	HK1427549-007		35	5		
MP6-2	[25-AUG-2014]	HK1427549-008		34	4		



**Laboratory Duplicate (DUP) Report**

Matrix: WATER

				Laboratory Duplicate (DUP) Report				
Laboratory sample ID	Client sample ID	Method: Compound	CAS Number	LOR	Unit	Original Result	Duplicate Result	RPD (%)
<b>EA/ED: Physical and Aggregate Properties (QC Lot: 3610862)</b>								
HK1425840-001	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	13	13	0.0
HK1427549-001	MP3-1	EA025: Suspended Solids (SS)	----	2	mg/L	7	7	0.0

**Method Blank (MB), Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report**

Matrix: WATER

			Method Blank (MB) Report			Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report					
Method: Compound	CAS Number	LOR	Unit	Result	Spike Concentration	Spike Recovery (%)		Recovery Limits (%)		RPDs (%)	
						LCS	DCS	Low	High	Value	Control Limit
<b>EA/ED: Physical and Aggregate Properties (QCLot: 3610862)</b>											
EA025: Suspended Solids (SS)	----	2	mg/L	<2	10 mg/L	100	----	92	108	----	----
<b>EP: Aggregate Organics (QCLot: 3609426)</b>											
EP030: Biochemical Oxygen Demand	----	2	mg/L	----	198 mg/L	91.5	----	78	110	----	----

**Matrix Spike (MS) and Matrix Spike Duplicate (MSD) Report**

- No Matrix Spike (MS) or Matrix Spike Duplicate (MSD) Results are required to be reported.



## CERTIFICATE OF ANALYSIS

<i>Client</i>	: ENOVATIVE ENVIRONMENTAL SERVICE LTD	<i>Laboratory</i>	: ALS Technichem HK Pty Ltd	<i>Page</i>	: 1 of 3
<i>Contact</i>	: MR THOMAS WONG	<i>Contact</i>	: Fung Lim Chee, Richard	<i>Work Order</i>	: <b>HK1427801</b>
<i>Address</i>	: RM811, HIN PUI HOUSE, HIN KENG ESTATE, TAI WAI, N.T. HONG KONG	<i>Address</i>	: 11/F., Chung Shun Knitting Centre, 1 - 3 Wing Yip Street, Kwai Chung, N.T., Hong Kong		
<i>E-mail</i>	: Thomas.wong@eno.com.hk	<i>E-mail</i>	: Richard.Fung@alsglobal.com		
<i>Telephone</i>	: ----	<i>Telephone</i>	: +852 2610 1044		
<i>Facsimile</i>	: ----	<i>Facsimile</i>	: +852 2610 2021		
<i>Project</i>	: PROPOSED COMPREHENSIVE DEVELOPMENT AT WO SHANG WAI YUEN LONG	<i>Quote number</i>	: HK/1577/2009**	<i>Date received</i>	: 27-AUG-2014
<i>Order number</i>	: ----			<i>Date of issue</i>	: 05-SEP-2014
<i>C-O-C number</i>	: ----			<i>No. of samples</i>	- Received : 8
<i>Site</i>	: ----				- Analysed : 8

### Report Comments

This report for ALS Technichem (HK) Pty Ltd work order reference HK1427801 supersedes any previous reports with this reference. The completion date of analysis is 02-SEP-2014. Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release. When date(s) and/or time(s) are shown bracketed, these have been assumed by the laboratory for process purposes. Abbreviations: CAS number = Chemical Abstract Services number. LOR = Limit of reporting.

Specific comments for Work Order HK1427801 :  
Sample(s) were received in a chilled condition.  
Water sample(s) analysed and reported on an as received basis.

This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.

This document has been electronically signed by those names that appear on this report and are the authorised signatories. Electronic signing has been carried out in compliance with procedures specified in the 'Electronic Transactions Ordinance' of Hong Kong, Chapter 553, Section 6.

<u>Signatory</u>	<u>Position</u>	<u>Authorised results for:-</u>
Fung Lim Chee, Richard	General Manager	Inorganics



**Analytical Results**

Sub-Matrix: WATER

			Compound	EA025: Suspended Solids (SS)	EP030: Biochemical Oxygen Demand		
			LOR Unit	2 mg/L	2 mg/L		
Client sample ID	Client sampling date / time	Laboratory sample ID		EA/ED: Physical and Aggregate Properties	EP: Aggregate Organics		
MP3-1	[27-AUG-2014]	HK1427801-001		11	2		
MP3-2	[27-AUG-2014]	HK1427801-002		10	2		
MP4-1	[27-AUG-2014]	HK1427801-003		21	4		
MP4-2	[27-AUG-2014]	HK1427801-004		22	4		
MP5-1	[27-AUG-2014]	HK1427801-005		15	3		
MP5-2	[27-AUG-2014]	HK1427801-006		14	3		
MP6-1	[27-AUG-2014]	HK1427801-007		19	3		
MP6-2	[27-AUG-2014]	HK1427801-008		20	3		



**Laboratory Duplicate (DUP) Report**

Matrix: WATER				Laboratory Duplicate (DUP) Report					
Laboratory sample ID	Client sample ID	Method: Compound	CAS Number	LOR	Unit	Original Result	Duplicate Result	RPD (%)	
<b>EA/ED: Physical and Aggregate Properties (QC Lot: 3610864)</b>									
HK1427659-001	Anonymous	EA025: Suspended Solids (SS)	----	3	mg/L	32	32	0.0	
HK1427728-001	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	5	5	0.0	
<b>EA/ED: Physical and Aggregate Properties (QC Lot: 3610865)</b>									
HK1427809-001	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	254	254	0.0	

**Method Blank (MB), Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report**

Matrix: WATER			Method Blank (MB) Report			Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report						
Method: Compound	CAS Number	LOR	Unit	Result	Spike Concentration	Spike Recovery (%)		Recovery Limits (%)		RPDs (%)		
						LCS	DCS	Low	High	Value	Control Limit	
<b>EA/ED: Physical and Aggregate Properties (QCLot: 3610864)</b>												
EA025: Suspended Solids (SS)	----	2	mg/L	<2	10 mg/L	100	----	92	108	----	----	
<b>EA/ED: Physical and Aggregate Properties (QCLot: 3610865)</b>												
EA025: Suspended Solids (SS)	----	2	mg/L	<2	10 mg/L	98.0	----	92	108	----	----	
<b>EP: Aggregate Organics (QCLot: 3611006)</b>												
EP030: Biochemical Oxygen Demand	----	2	mg/L	----	198 mg/L	87.6	----	78	110	----	----	

**Matrix Spike (MS) and Matrix Spike Duplicate (MSD) Report**

- No Matrix Spike (MS) or Matrix Spike Duplicate (MSD) Results are required to be reported.



## CERTIFICATE OF ANALYSIS

<i>Client</i>	: ENOVATIVE ENVIRONMENTAL SERVICE LTD	<i>Laboratory</i>	: ALS Technichem HK Pty Ltd	<i>Page</i>	: 1 of 3
<i>Contact</i>	: MR THOMAS WONG	<i>Contact</i>	: Fung Lim Chee, Richard	<i>Work Order</i>	: <b>HK1428025</b>
<i>Address</i>	: RM811, HIN PUI HOUSE, HIN KENG ESTATE, TAI WAI, N.T. HONG KONG	<i>Address</i>	: 11/F., Chung Shun Knitting Centre, 1 - 3 Wing Yip Street, Kwai Chung, N.T., Hong Kong		
<i>E-mail</i>	: Thomas.wong@eno.com.hk	<i>E-mail</i>	: Richard.Fung@alsglobal.com		
<i>Telephone</i>	: ----	<i>Telephone</i>	: +852 2610 1044		
<i>Facsimile</i>	: ----	<i>Facsimile</i>	: +852 2610 2021		
<i>Project</i>	: PROPOSED COMPREHENSIVE DEVELOPMENT AT WO SHANG WAI YUEN LONG	<i>Quote number</i>	: HK/1577/2009**	<i>Date received</i>	: 29-AUG-2014
<i>Order number</i>	: ----			<i>Date of issue</i>	: 05-SEP-2014
<i>C-O-C number</i>	: ----			<i>No. of samples</i>	- Received : 8
<i>Site</i>	: ----				- Analysed : 8

### Report Comments

This report for ALS Technichem (HK) Pty Ltd work order reference HK1428025 supersedes any previous reports with this reference. The completion date of analysis is 02-SEP-2014. Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release. When date(s) and/or time(s) are shown bracketed, these have been assumed by the laboratory for process purposes. Abbreviations: CAS number = Chemical Abstract Services number. LOR = Limit of reporting.

Specific comments for Work Order HK1428025 :  
Sample(s) were received in a chilled condition.  
Water sample(s) analysed and reported on an as received basis.

This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.

This document has been electronically signed by those names that appear on this report and are the authorised signatories. Electronic signing has been carried out in compliance with procedures specified in the 'Electronic Transactions Ordinance' of Hong Kong, Chapter 553, Section 6.

<u>Signatory</u>	<u>Position</u>	<u>Authorised results for:-</u>
Fung Lim Chee, Richard	General Manager	Inorganics



**Analytical Results**

Sub-Matrix: WATER

			Compound	EA025: Suspended Solids (SS)	EP030: Biochemical Oxygen Demand		
			LOR Unit	2 mg/L	2 mg/L		
Client sample ID	Client sampling date / time	Laboratory sample ID		EA/ED: Physical and Aggregate Properties	EP: Aggregate Organics		
MP3-1	[29-AUG-2014]	HK1428025-001		11	3		
MP3-2	[29-AUG-2014]	HK1428025-002		10	3		
MP4-1	[29-AUG-2014]	HK1428025-003		13	2		
MP4-2	[29-AUG-2014]	HK1428025-004		13	2		
MP5-1	[29-AUG-2014]	HK1428025-005		16	2		
MP5-2	[29-AUG-2014]	HK1428025-006		16	3		
MP6-1	[29-AUG-2014]	HK1428025-007		26	3		
MP6-2	[29-AUG-2014]	HK1428025-008		24	3		



**Laboratory Duplicate (DUP) Report**

Matrix: WATER				Laboratory Duplicate (DUP) Report				
Laboratory sample ID	Client sample ID	Method: Compound	CAS Number	LOR	Unit	Original Result	Duplicate Result	RPD (%)
<b>EA/ED: Physical and Aggregate Properties (QC Lot: 3614717)</b>								
HK1427731-021	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	211	216	2.3
HK1427908-017	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	<2	<2	0.0
<b>EA/ED: Physical and Aggregate Properties (QC Lot: 3614718)</b>								
HK1428025-004	MP4-2	EA025: Suspended Solids (SS)	----	2	mg/L	13	13	0.0
HK1428029-006	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	7	7	0.0

**Method Blank (MB), Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report**

Matrix: WATER			Method Blank (MB) Report			Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report					
Method: Compound	CAS Number	LOR	Unit	Result	Spike Concentration	Spike Recovery (%)		Recovery Limits (%)		RPDs (%)	
						LCS	DCS	Low	High	Value	Control Limit
<b>EA/ED: Physical and Aggregate Properties (QCLot: 3614717)</b>											
EA025: Suspended Solids (SS)	----	2	mg/L	<2	10 mg/L	98.0	----	92	108	----	----
<b>EA/ED: Physical and Aggregate Properties (QCLot: 3614718)</b>											
EA025: Suspended Solids (SS)	----	2	mg/L	<2	10 mg/L	98.0	----	92	108	----	----
<b>EP: Aggregate Organics (QCLot: 3614996)</b>											
EP030: Biochemical Oxygen Demand	----	2	mg/L	----	198 mg/L	87.6	----	78	110	----	----

**Matrix Spike (MS) and Matrix Spike Duplicate (MSD) Report**

- No Matrix Spike (MS) or Matrix Spike Duplicate (MSD) Results are required to be reported.






## Appendix G. Weather Conditions during the Monitoring Period






## Wind Data for Wetland Park

1 August 2014

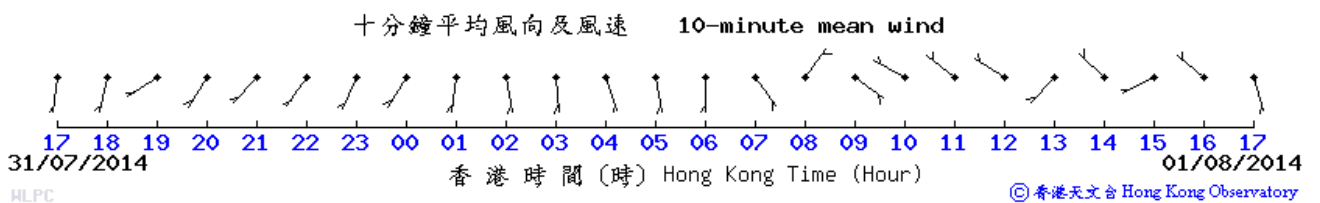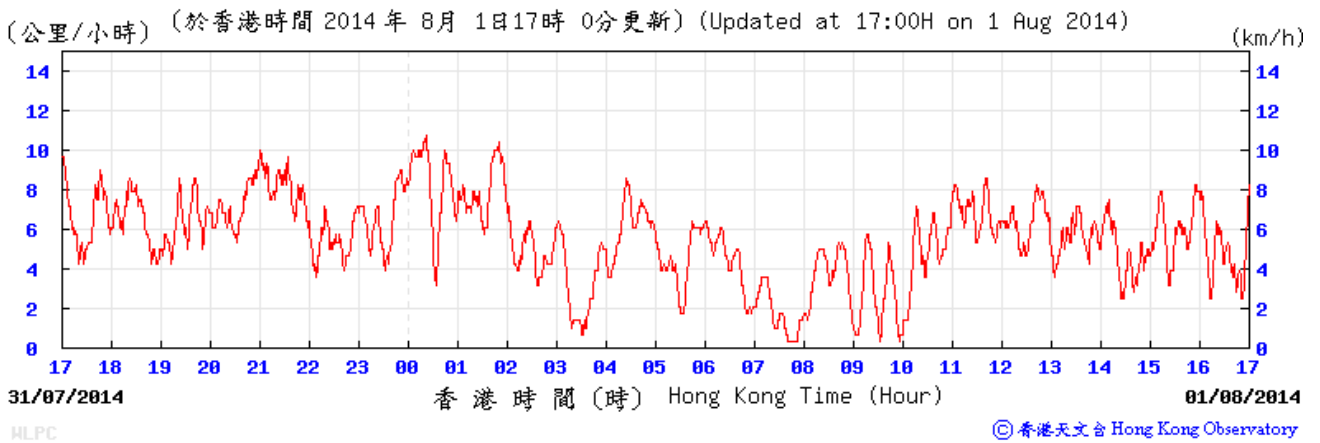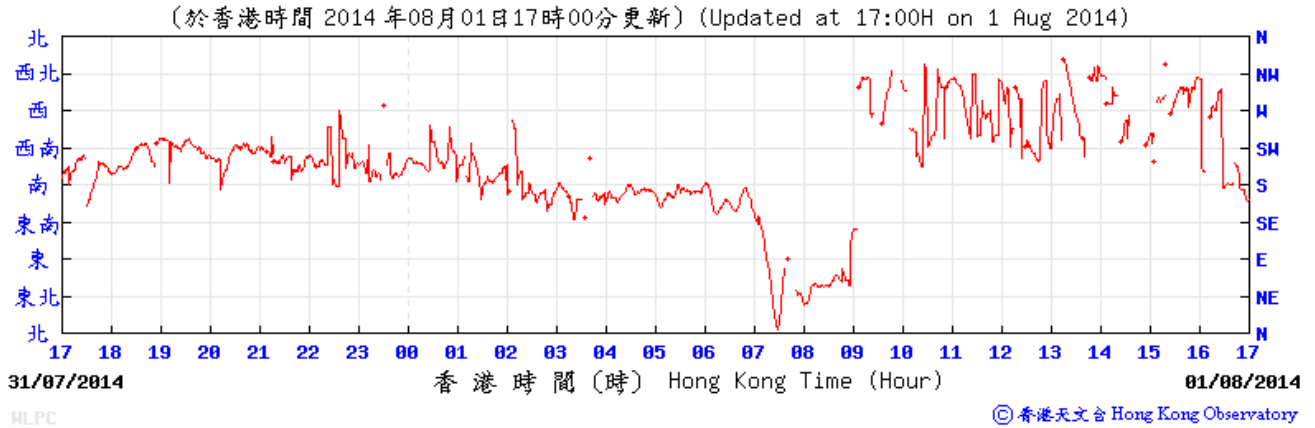




## Wind Data for Wetland Park

2 August 2014

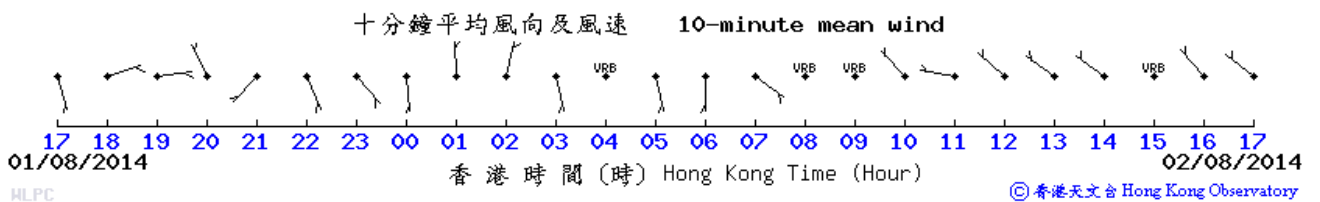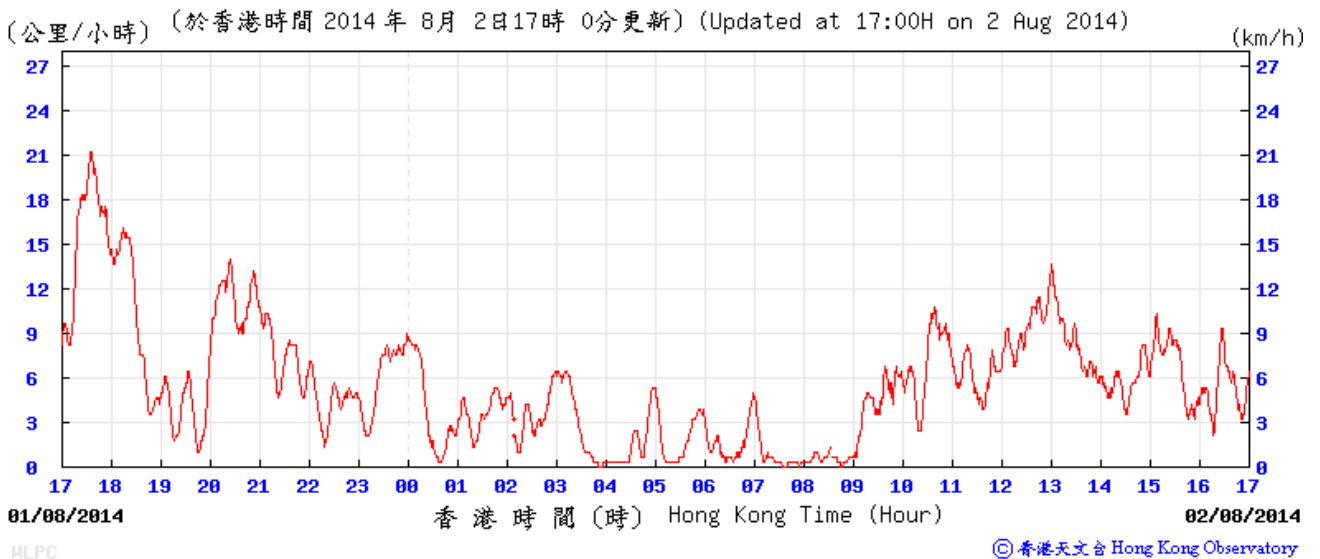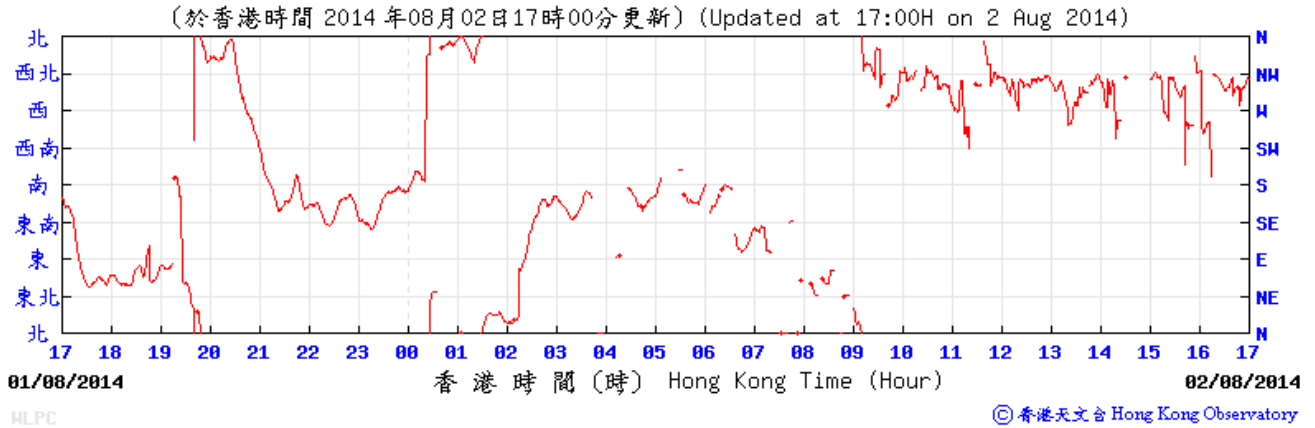




## Wind Data for Wetland Park

7 August 2014

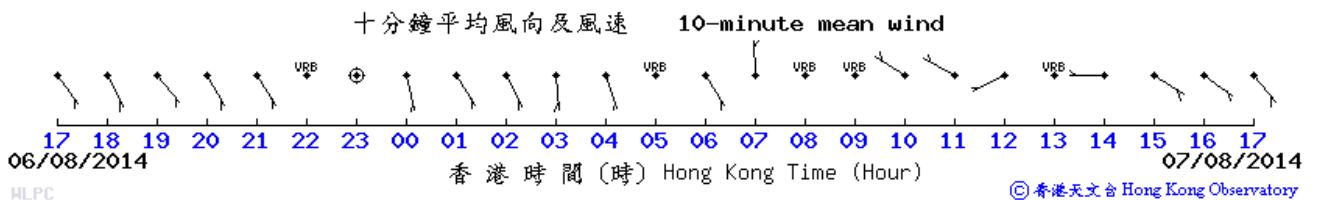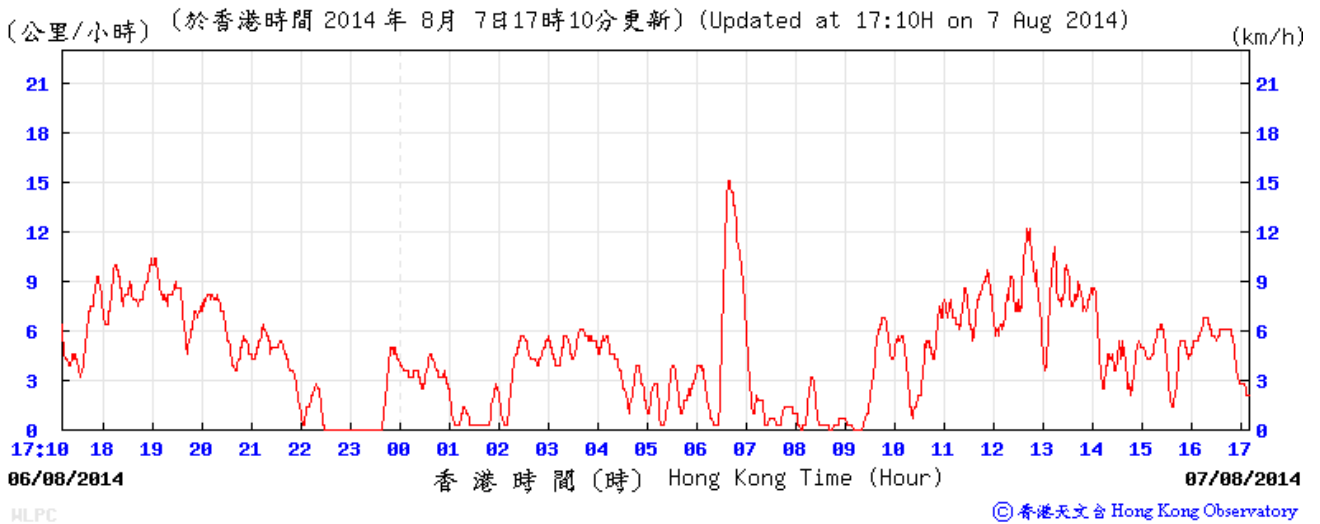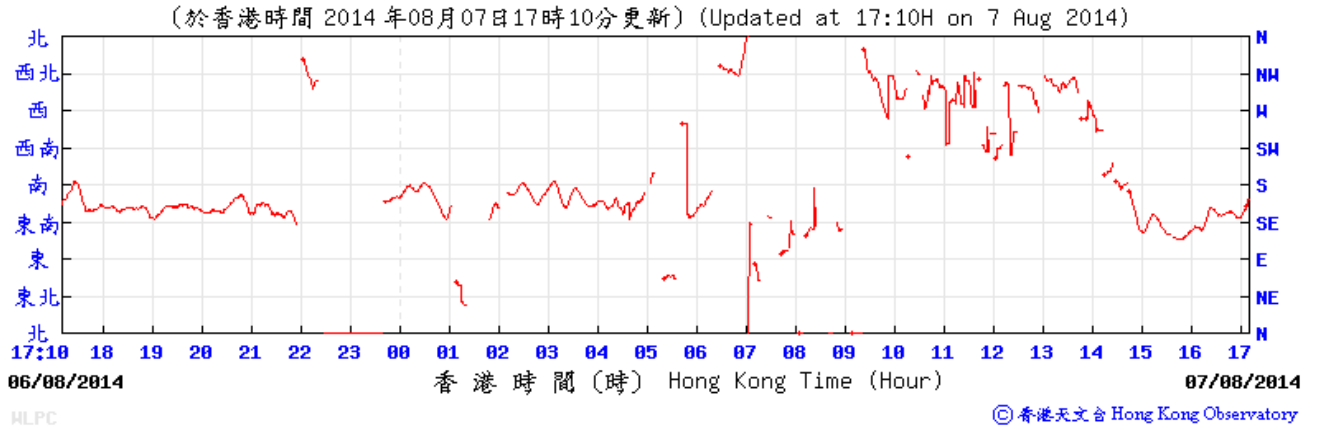




## Wind Data for Wetland Park

8 August 2014

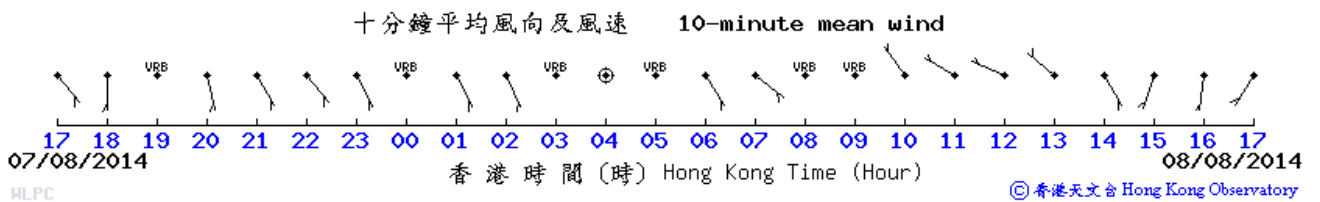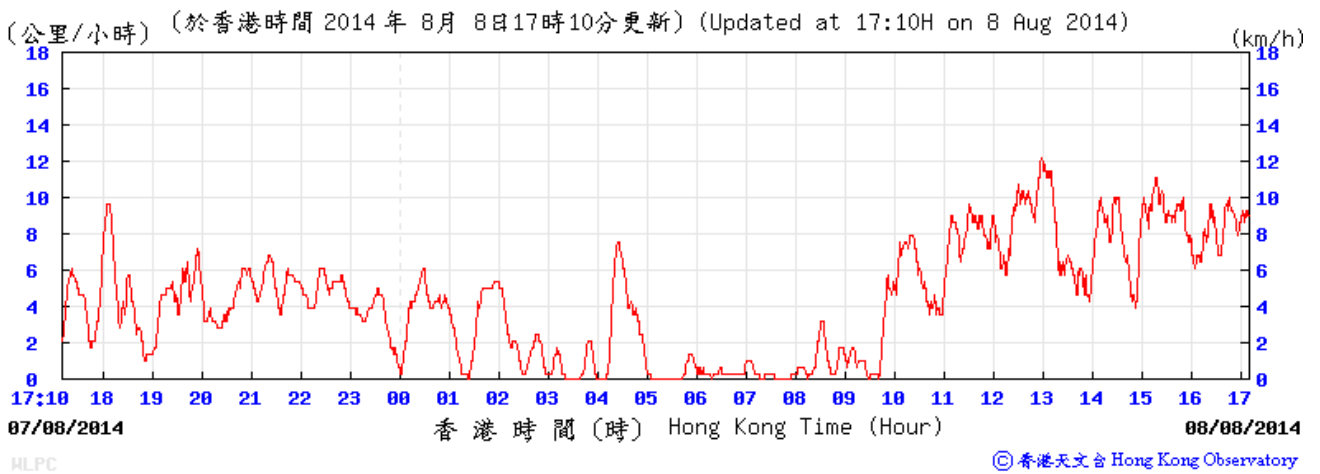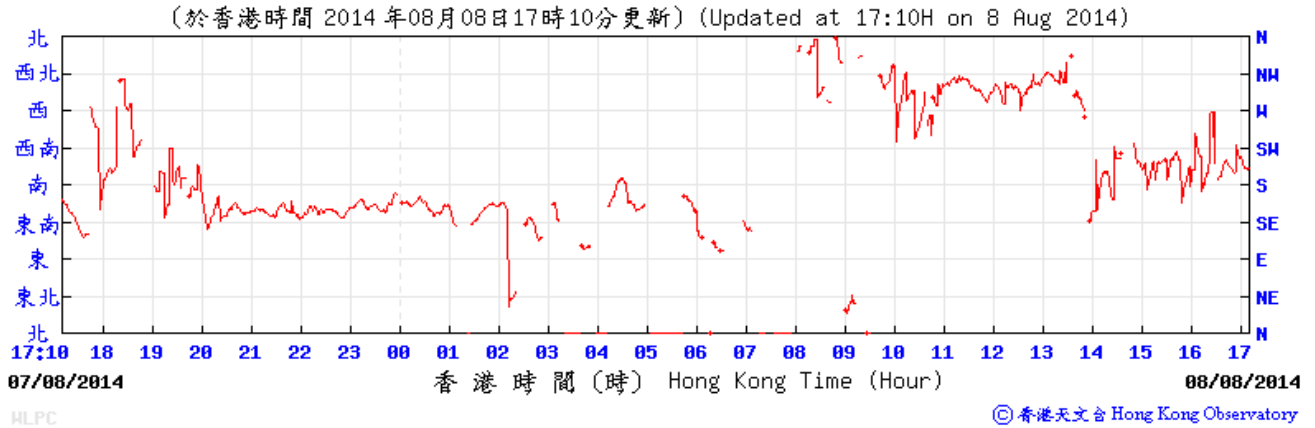




## Wind Data for Wetland Park

13 August 2014

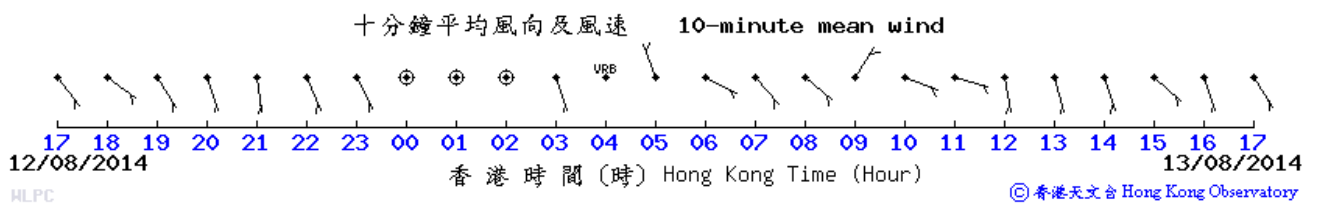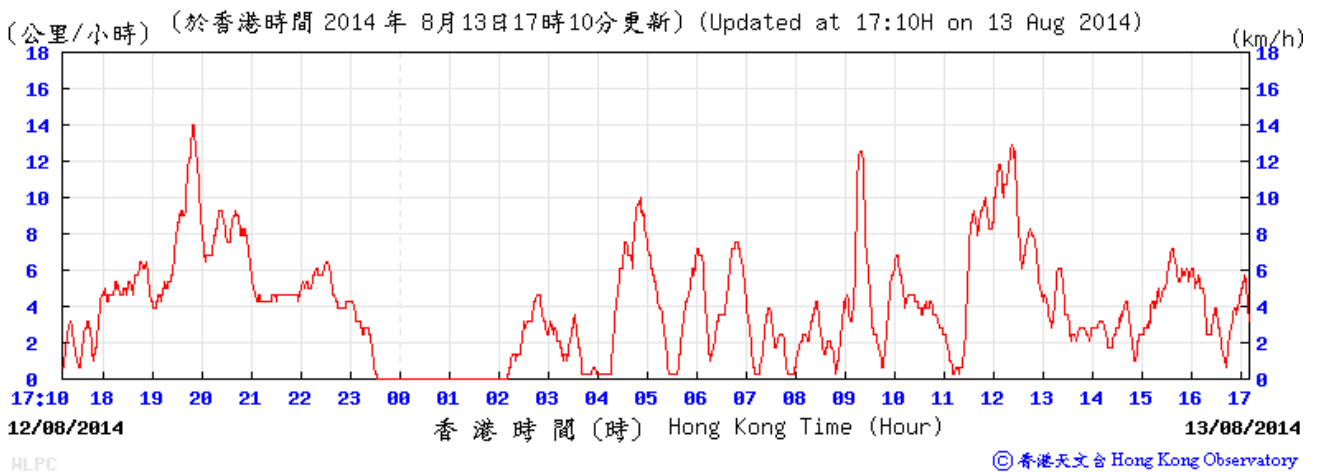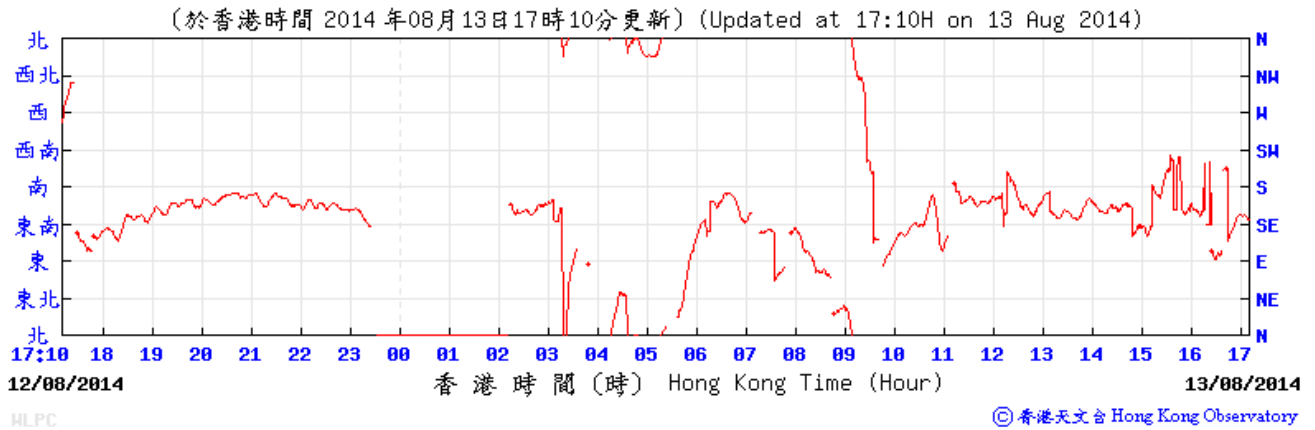

## Wind Data for Wetland Park




14 August 2014

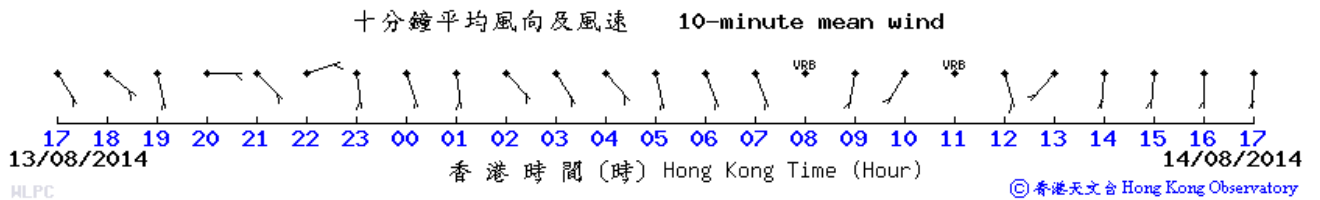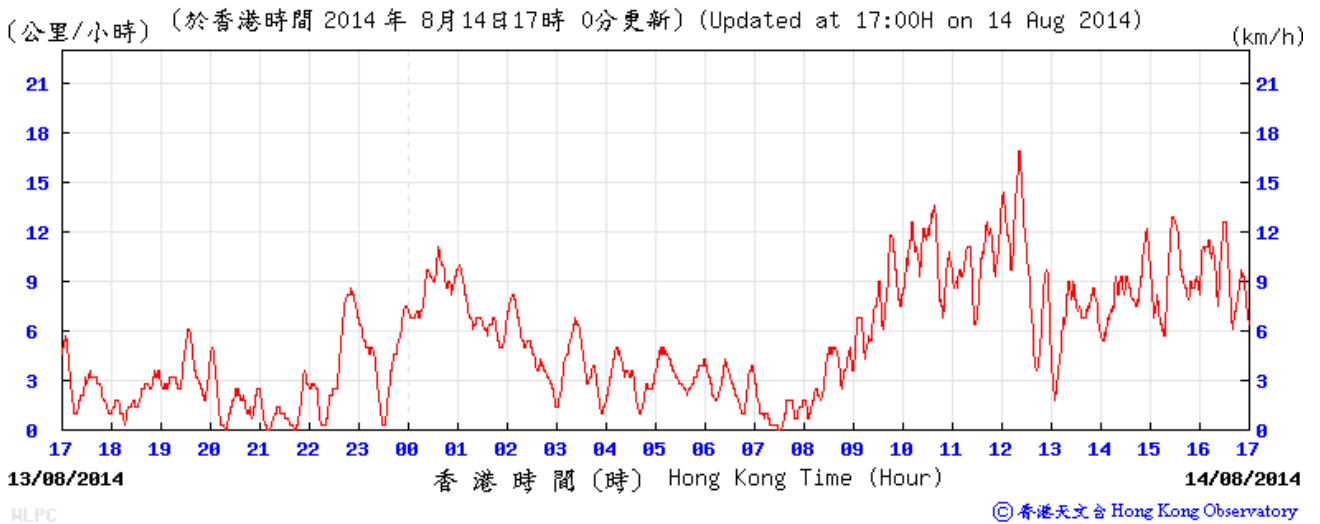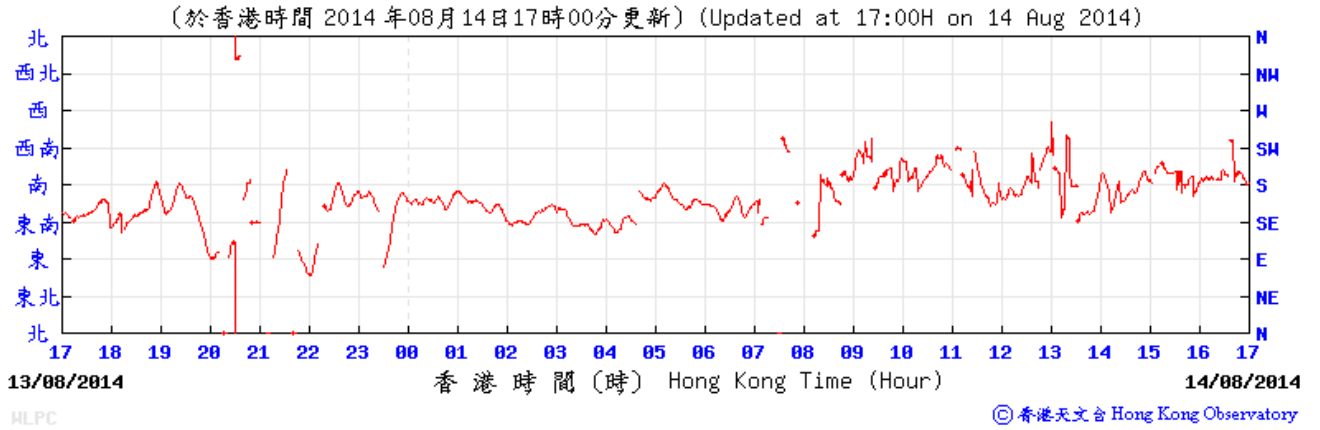






## Wind Data for Wetland Park

19 Aug 2014

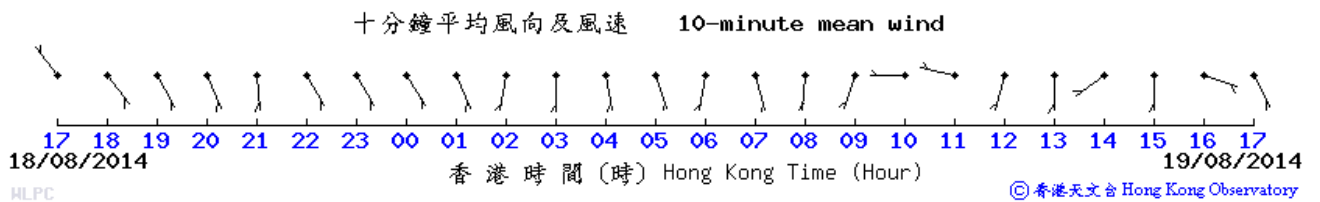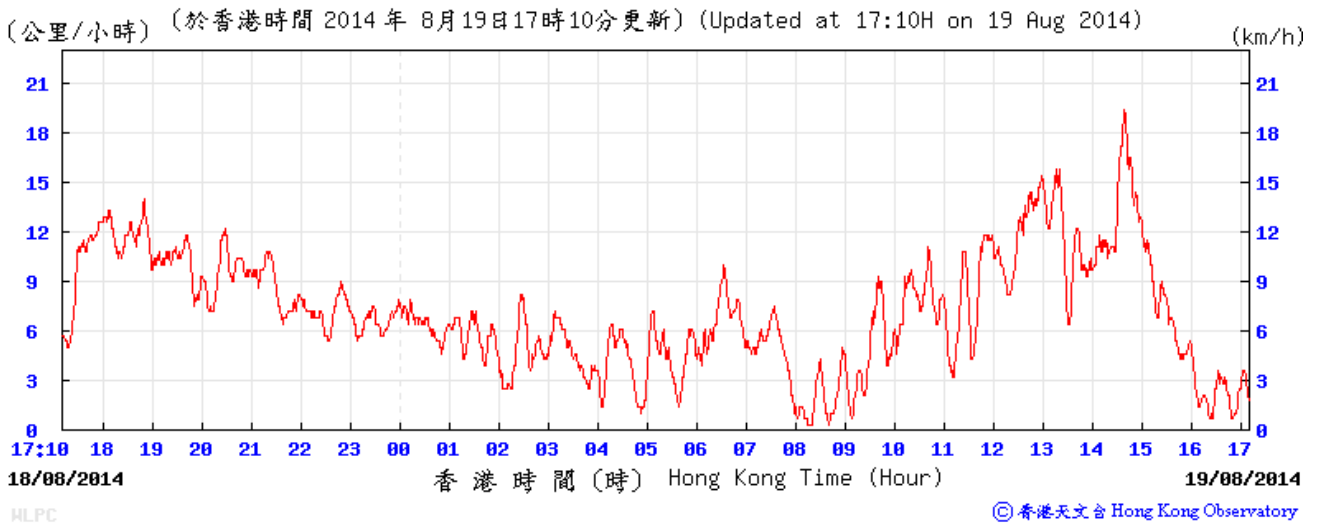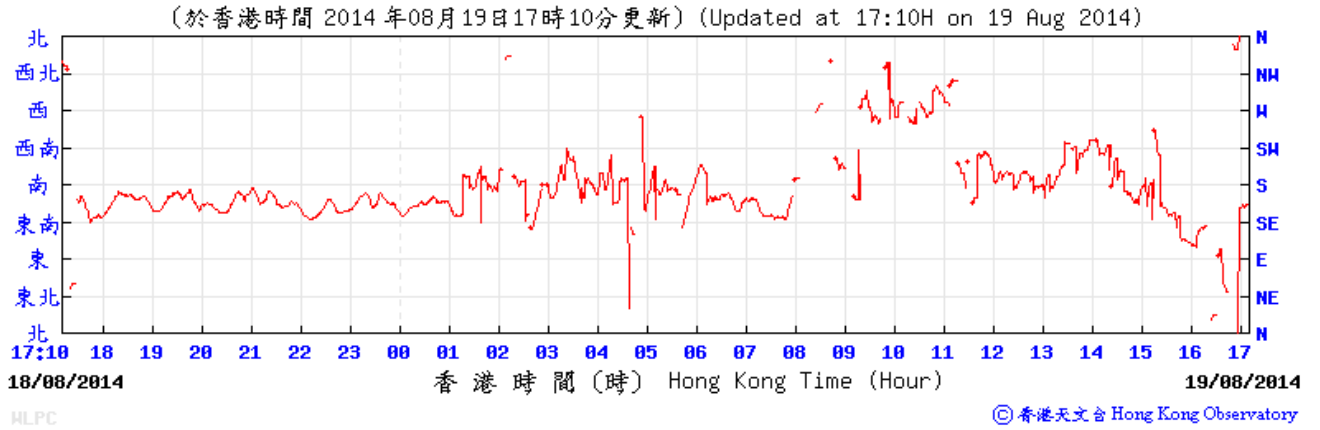




## Wind Data for Wetland Park

20 August 2014

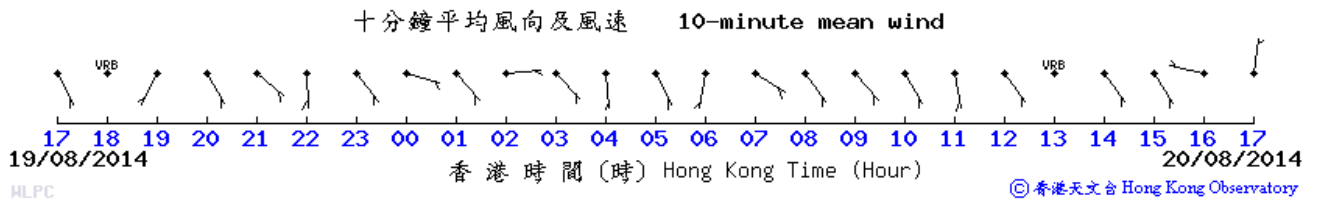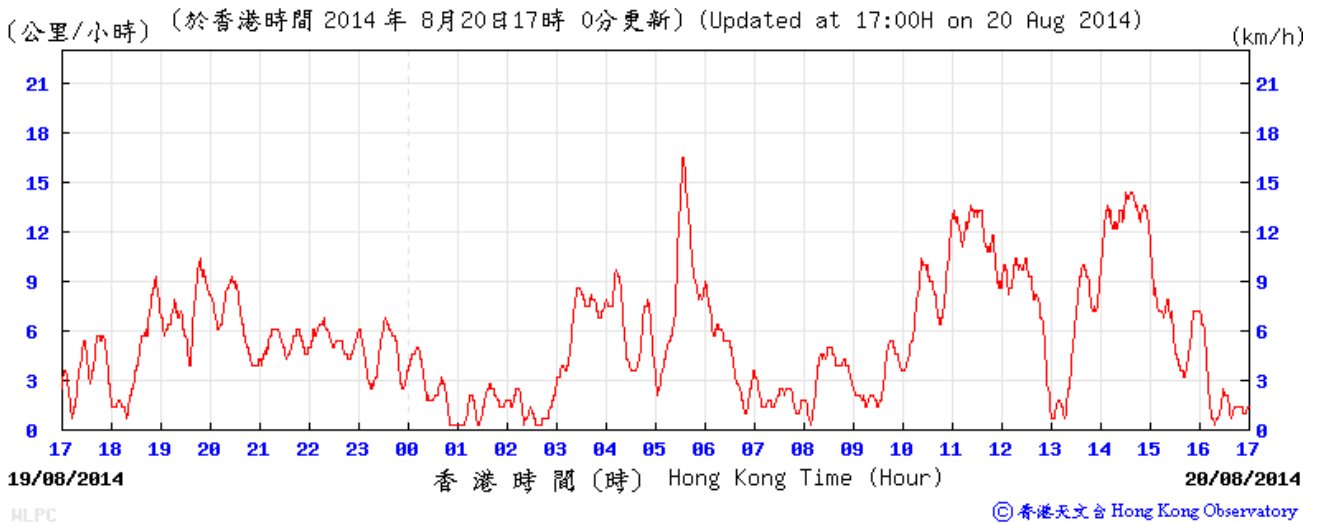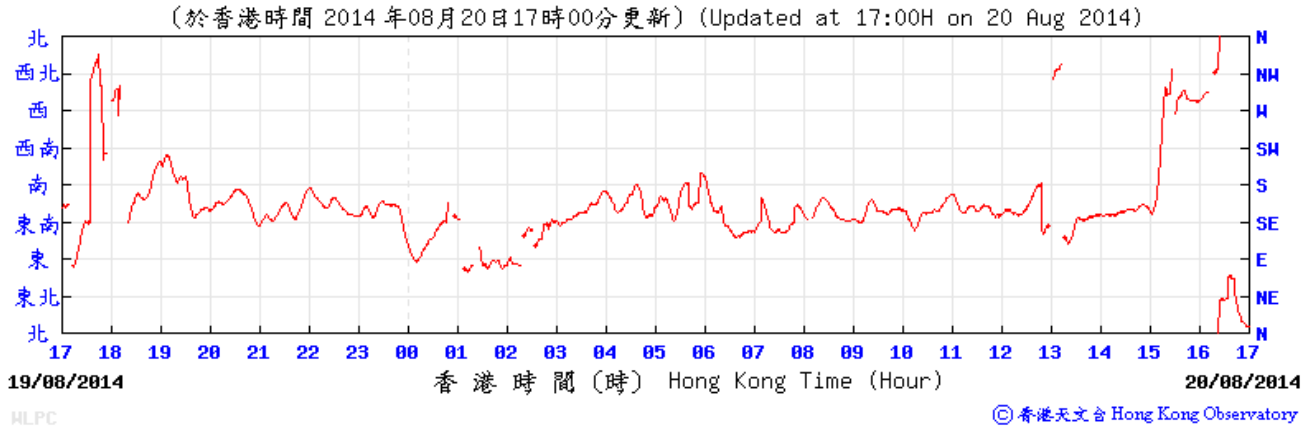




## Wind Data for Wetland Park

25 August 2014

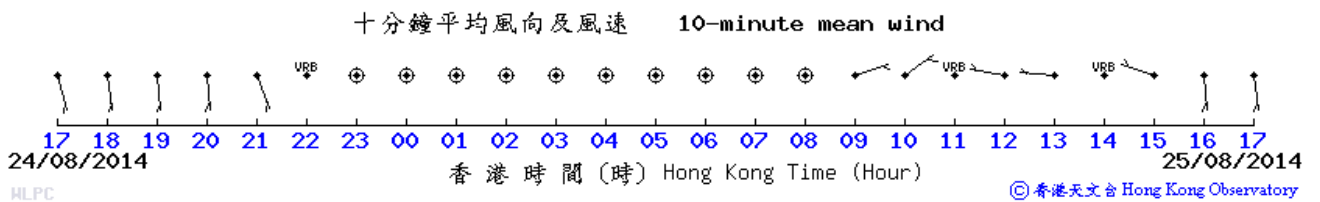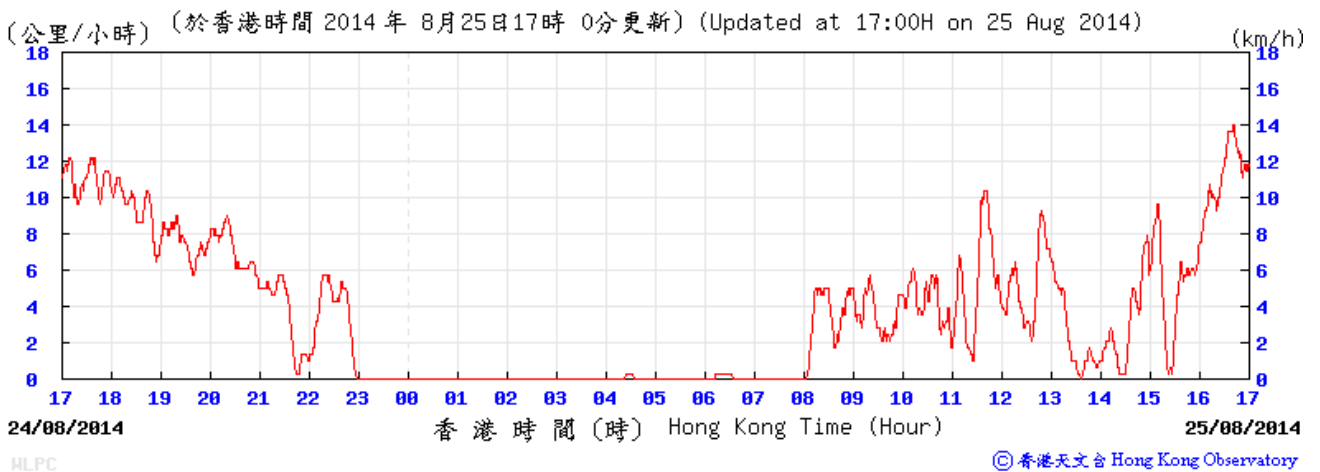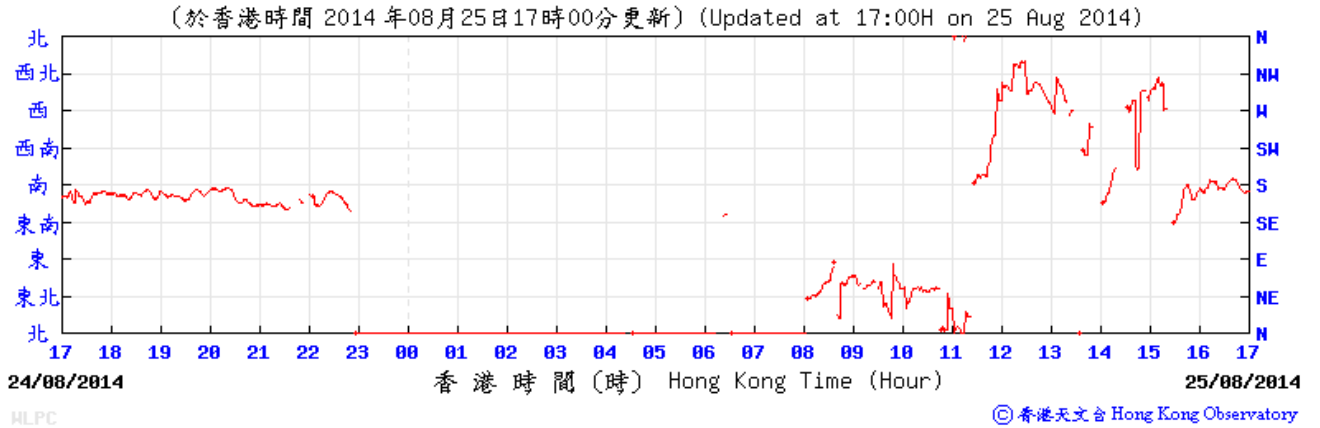




## Wind Data for Wetland Park

26 August 2014

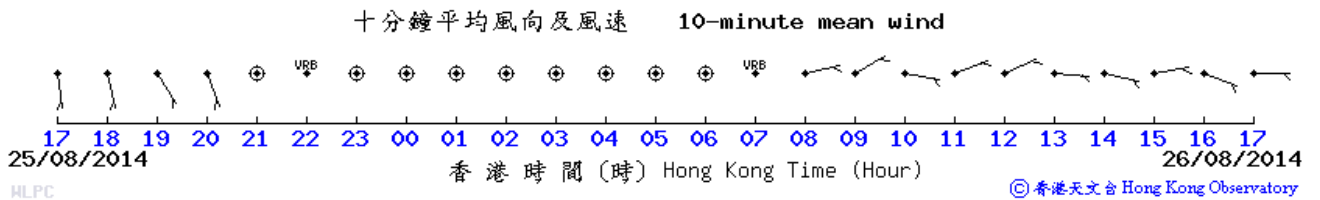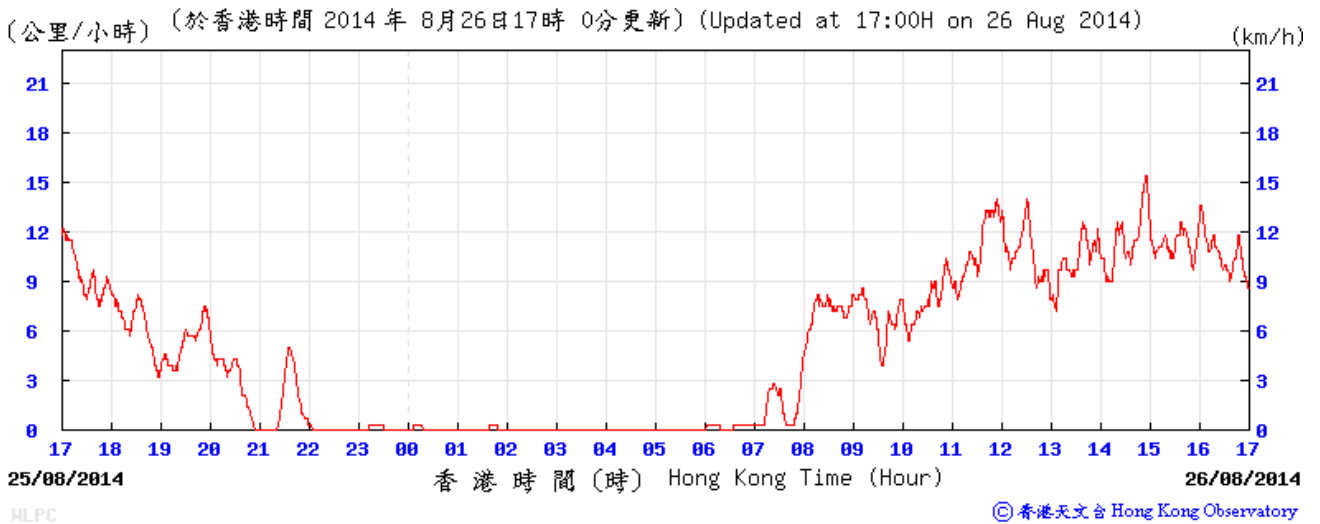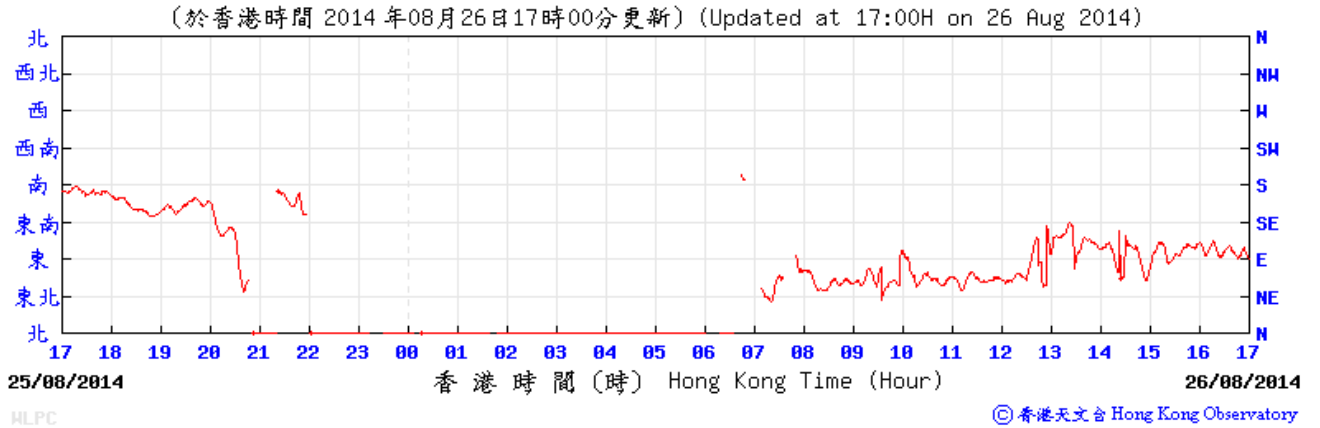




## Wind Data for Wetland Park

### 29 August 2014

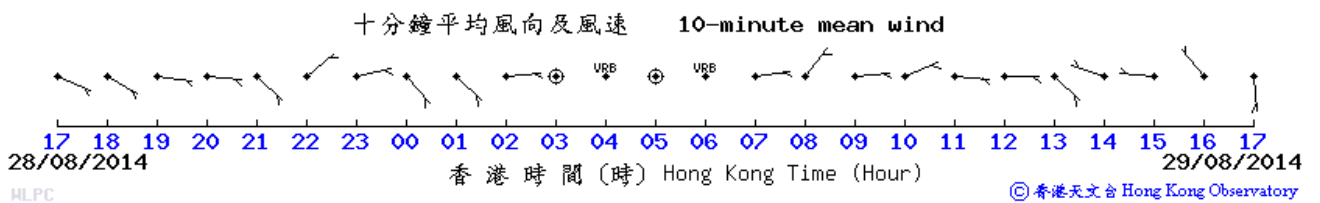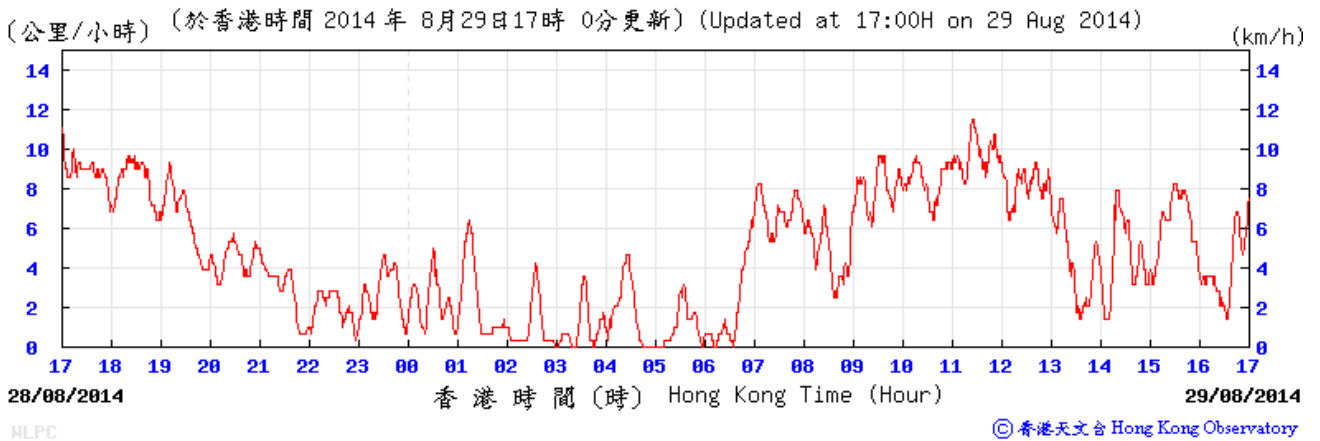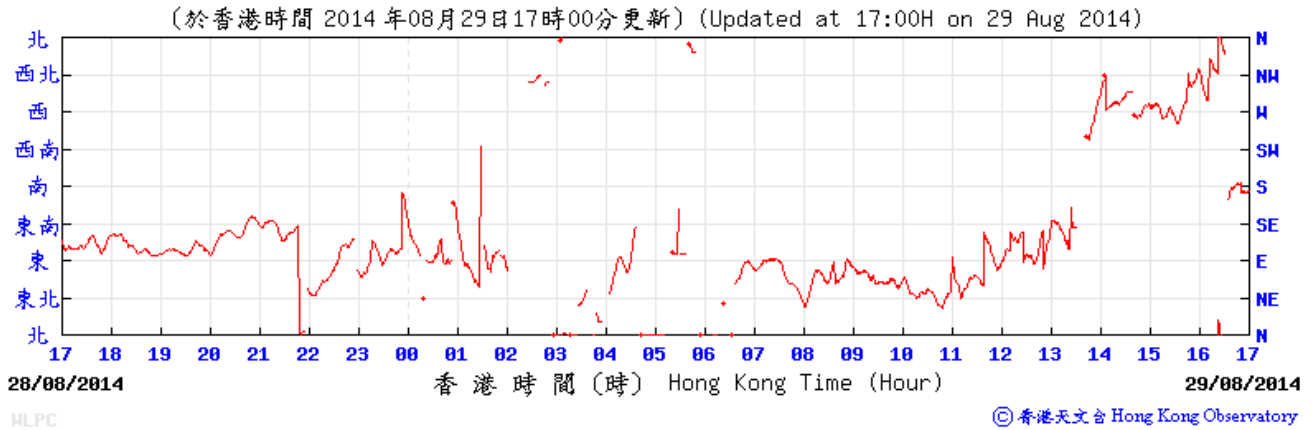




## Wind Data for Wetland Park

30 August 2014

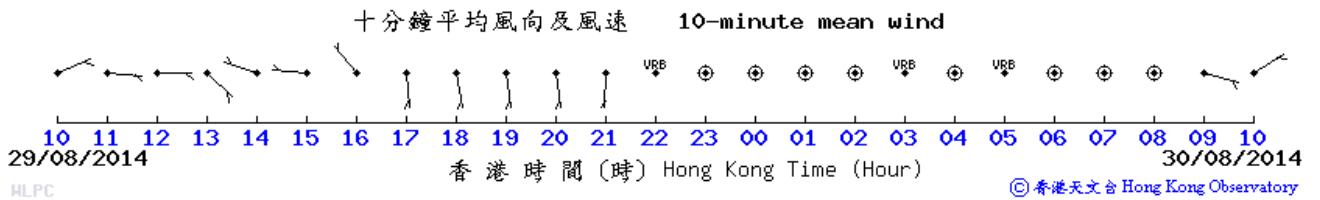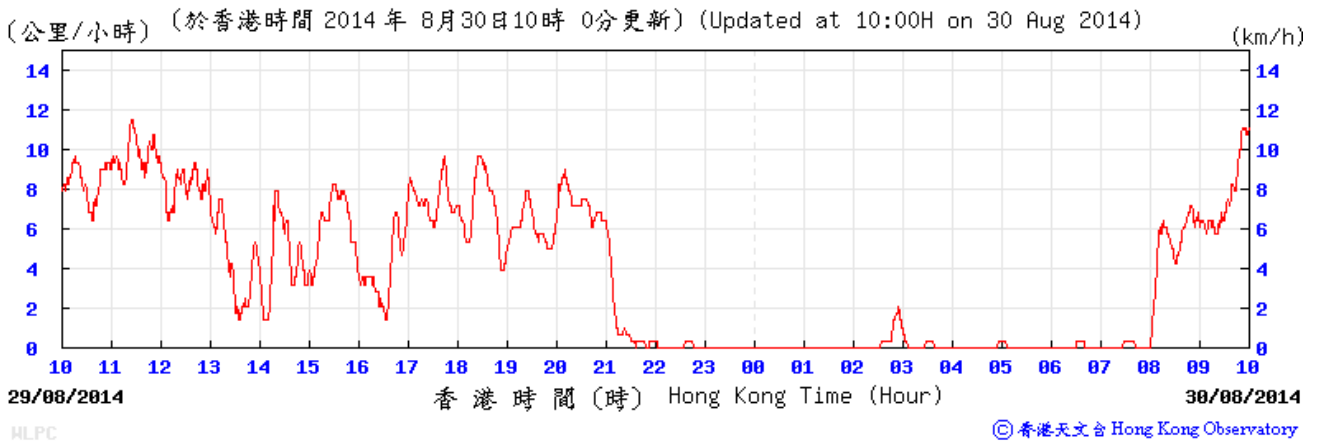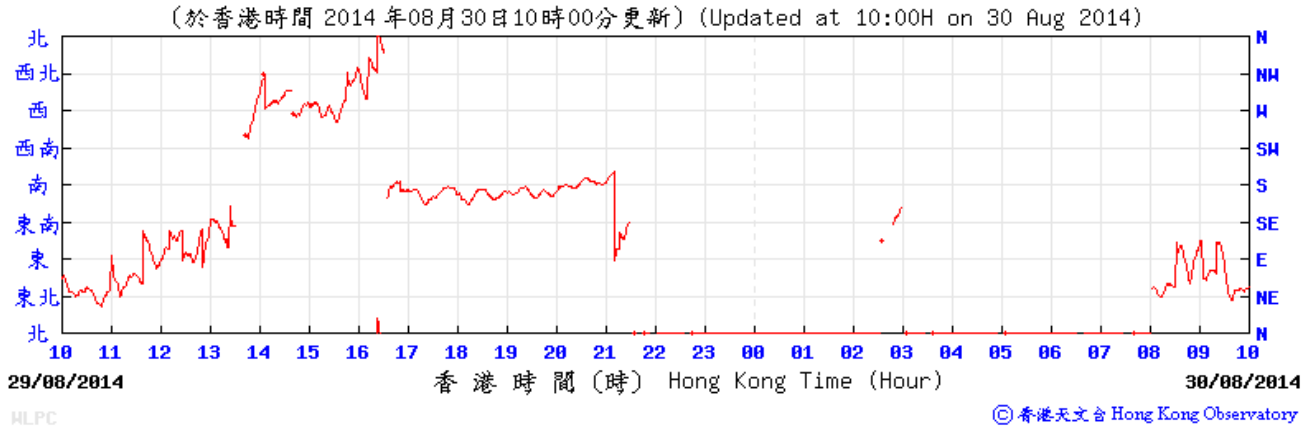




## Wind Data for Lau Fau Shan

1 August 2014

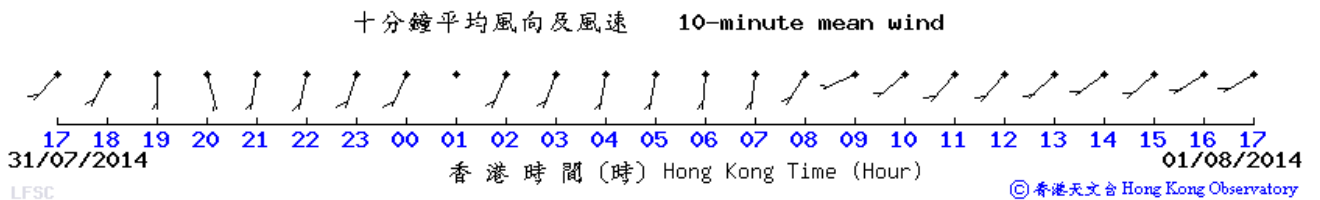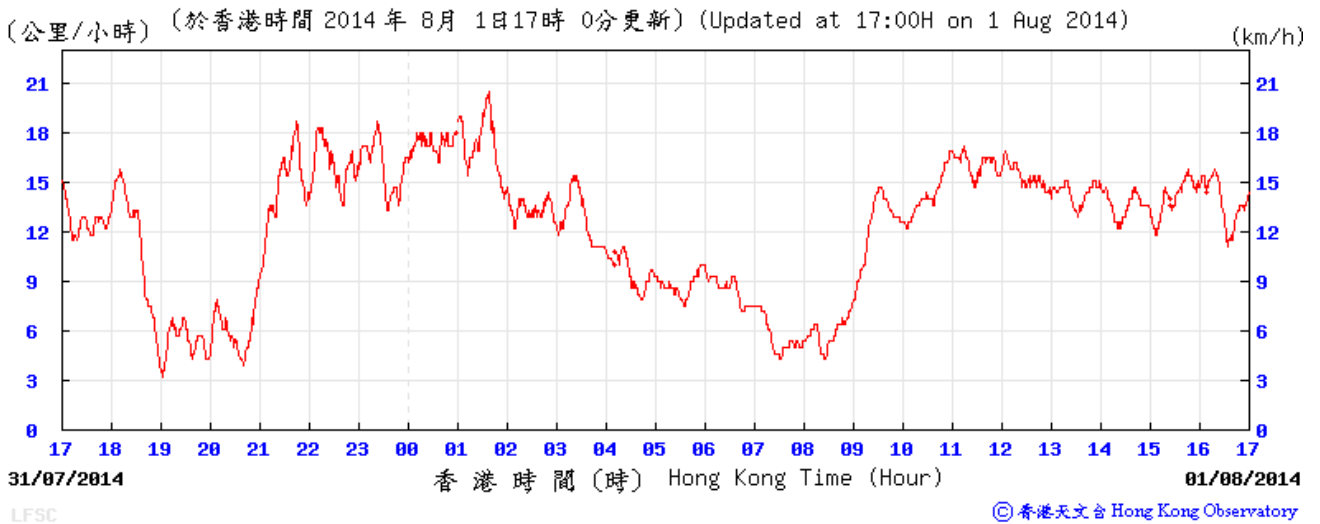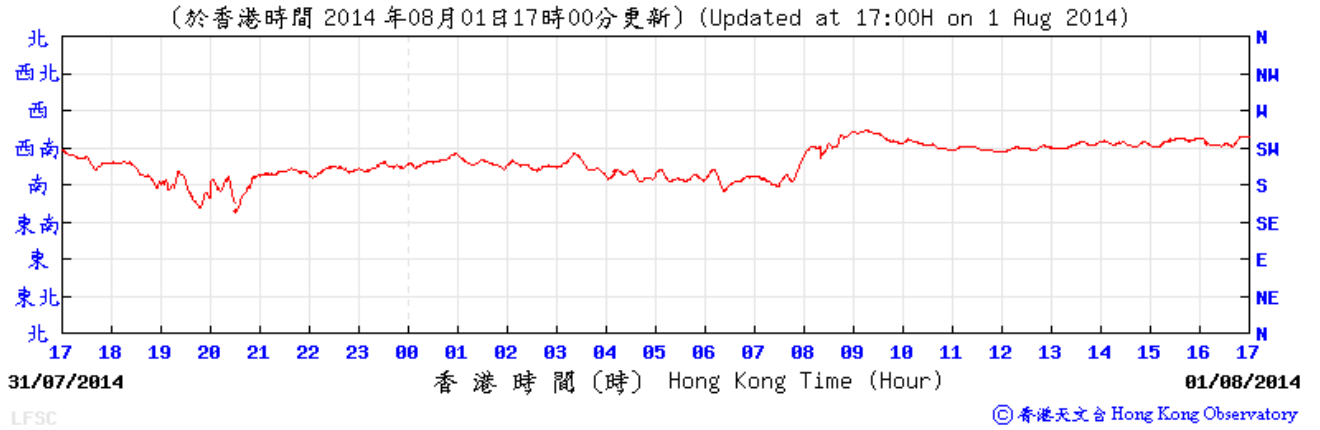

## Wind Data for Lau Fau Shan




2 August 2014

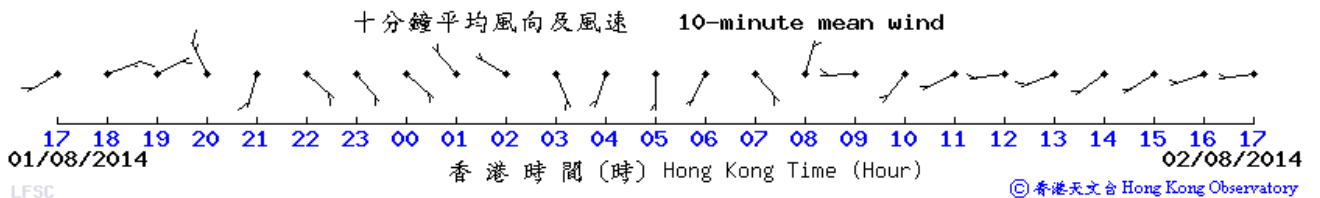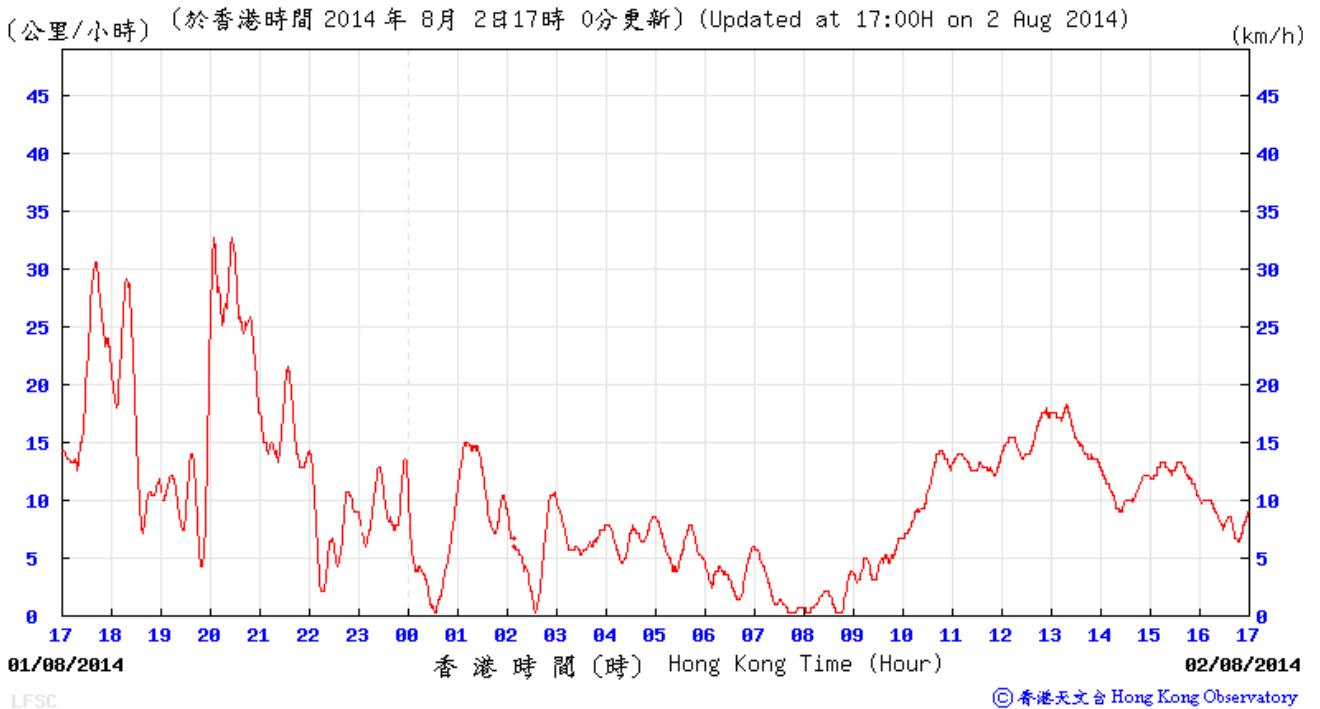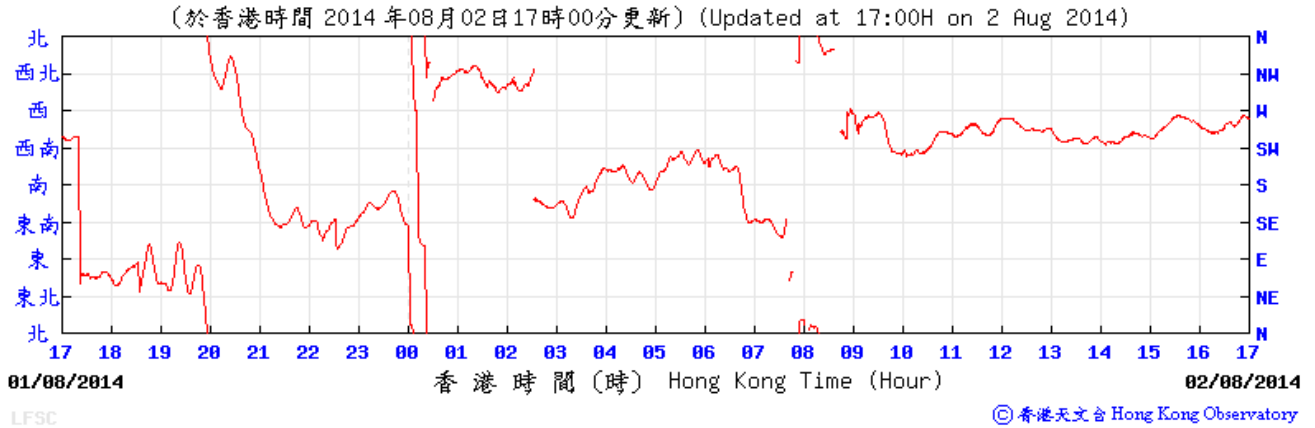






## Wind Data for Lau Fau Shan

7 August 2014

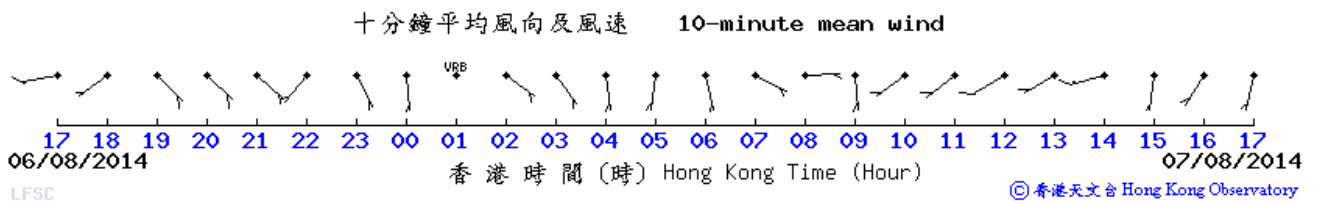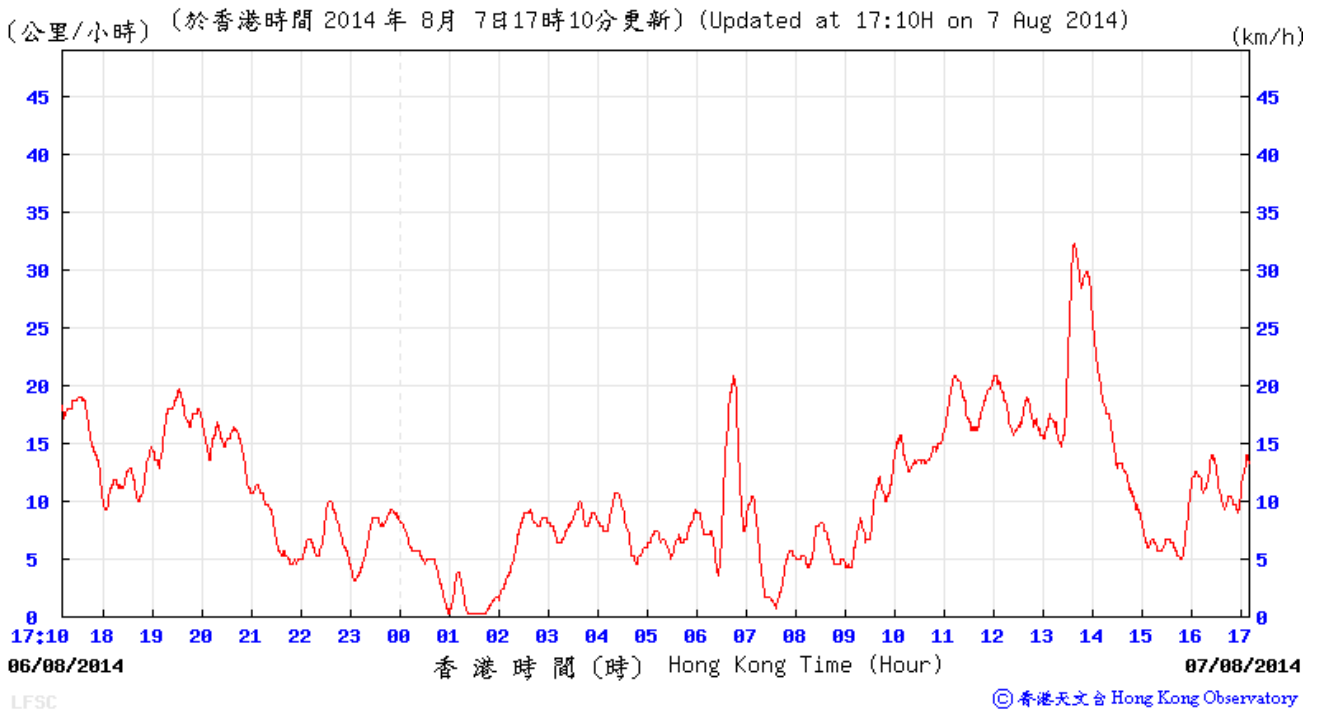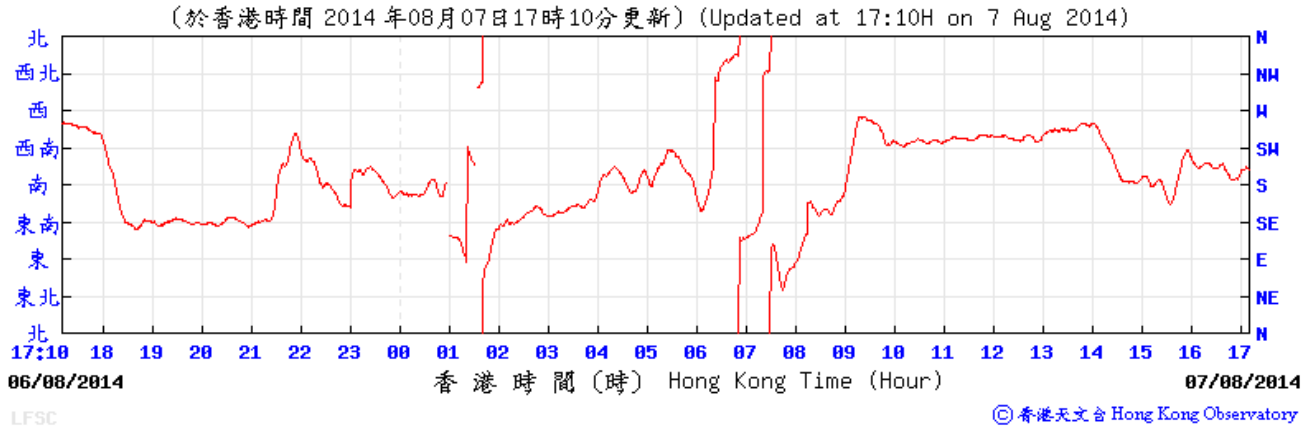




## Wind Data for Lau Fau Shan

8 August 2014

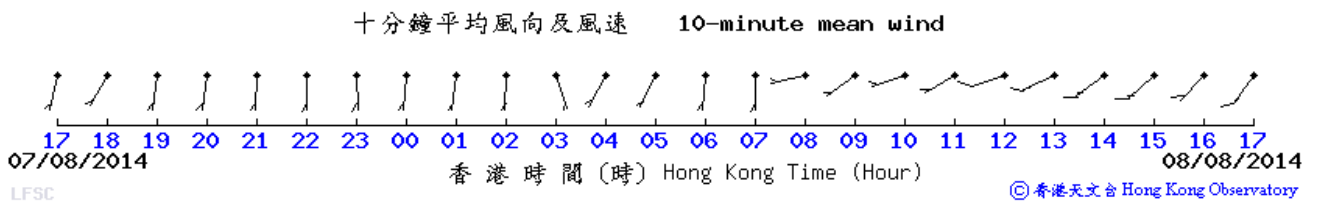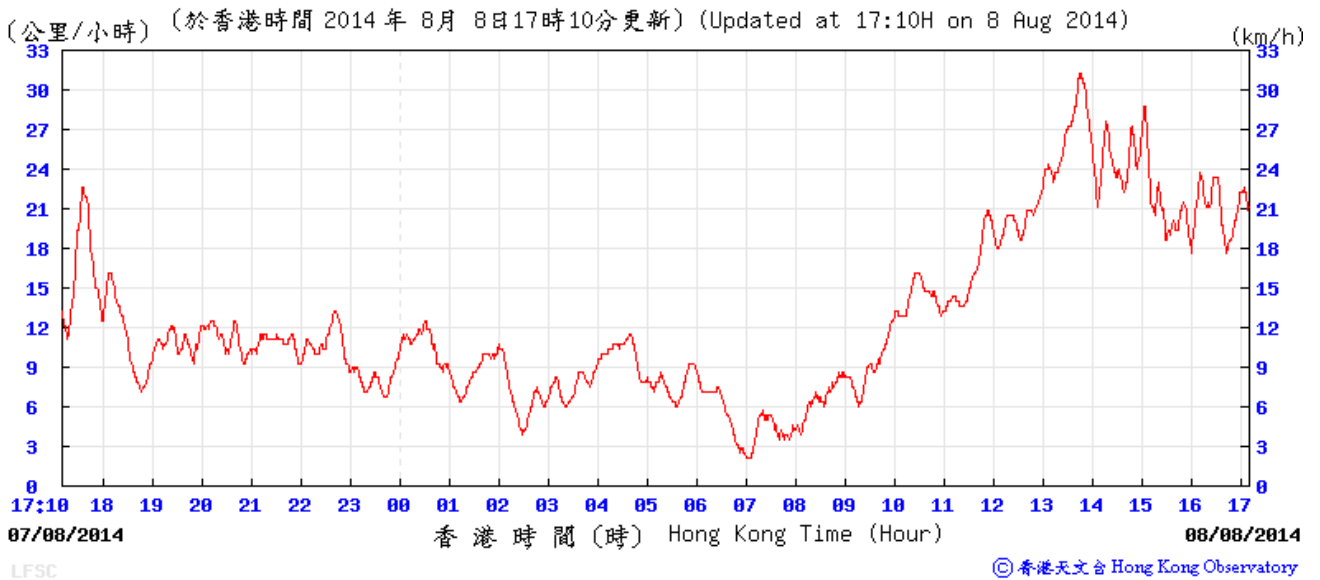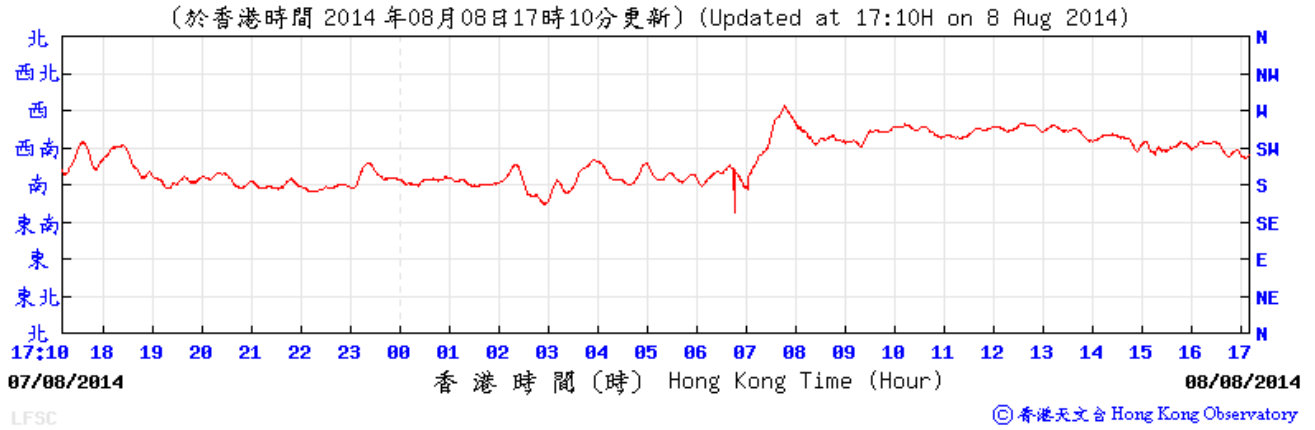




## Wind Data for Lau Fau Shan

13 August 2014

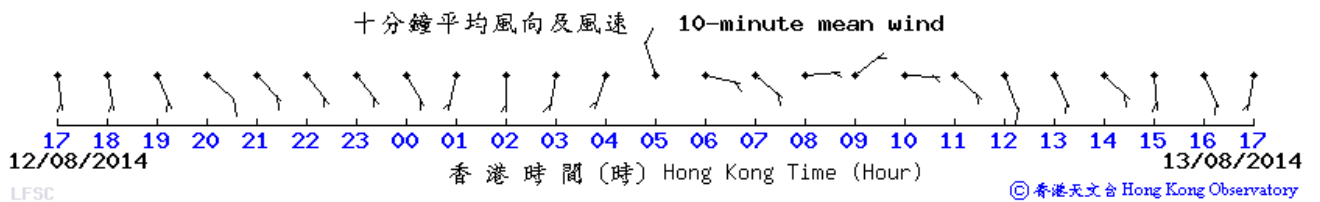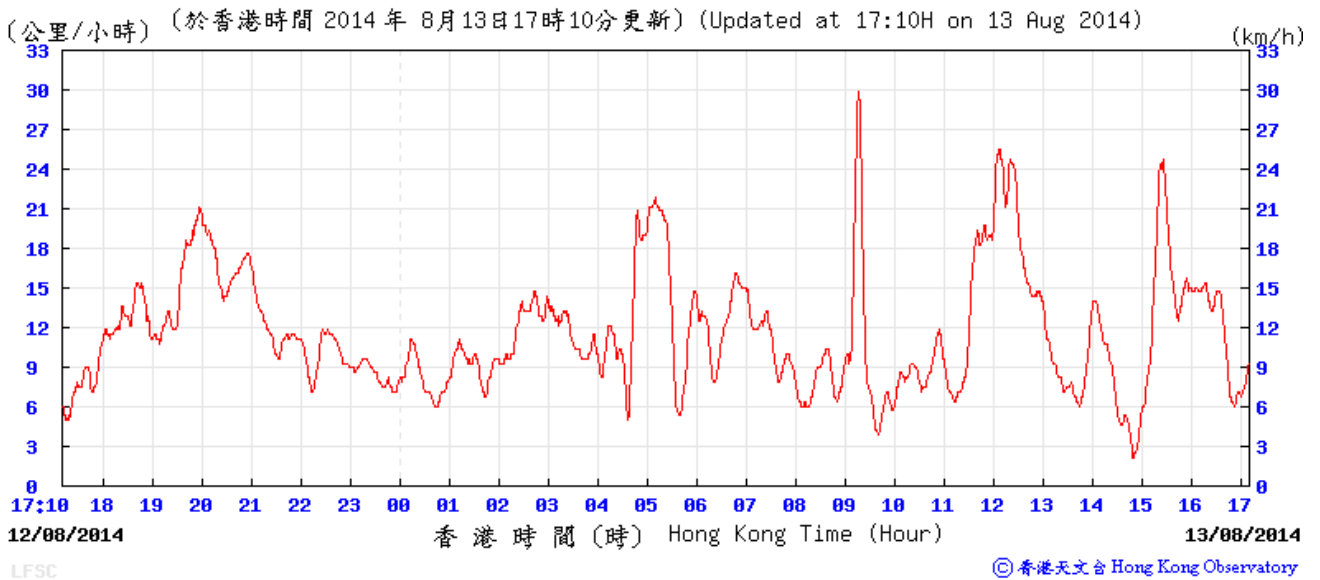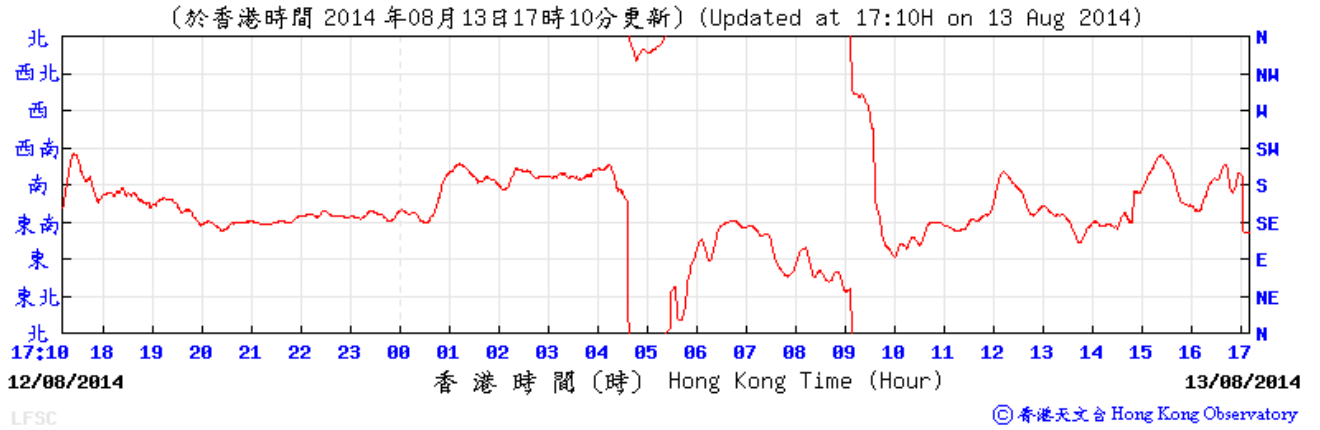




## Wind Data for Lau Fau Shan

14 August 2014

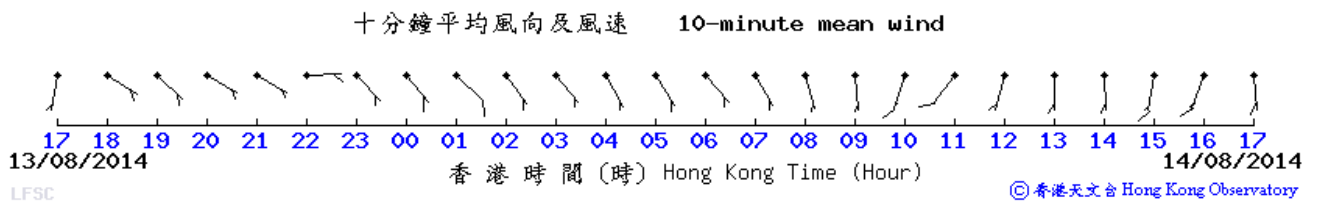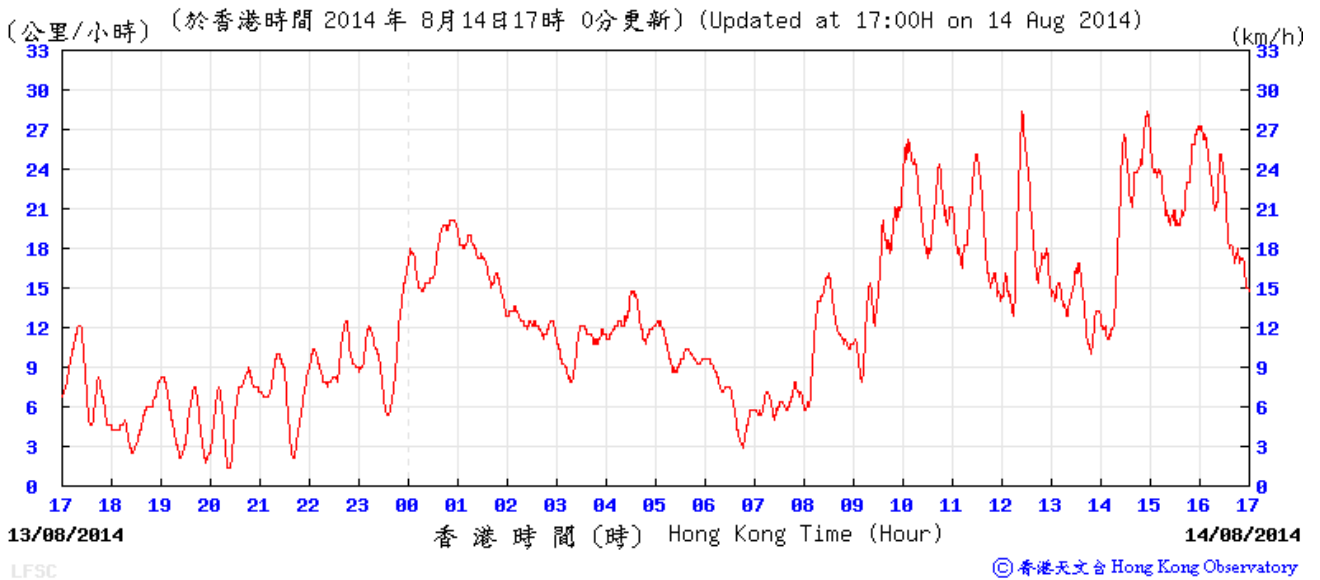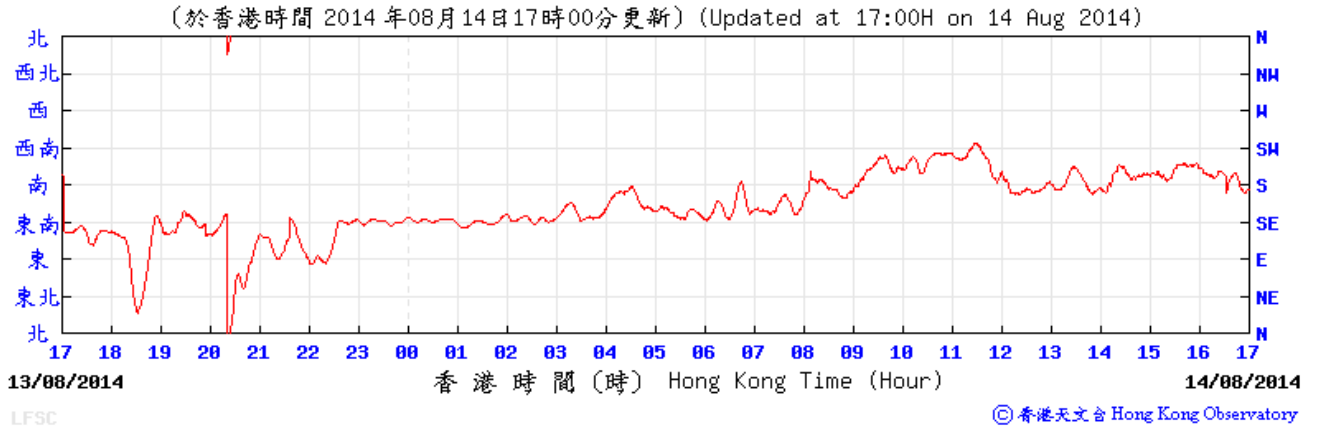




## Wind Data for Lau Fau Shan

19 August 2014

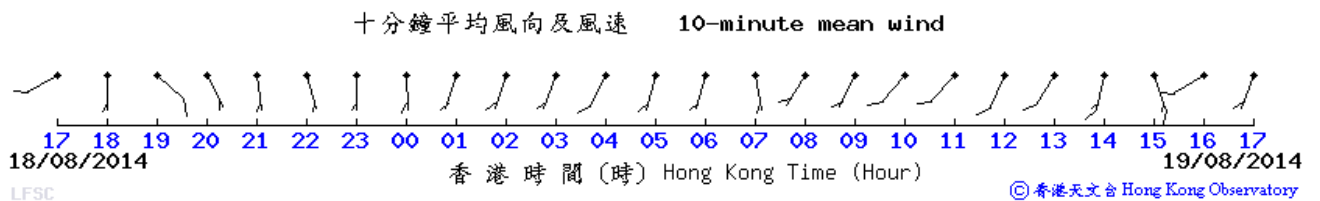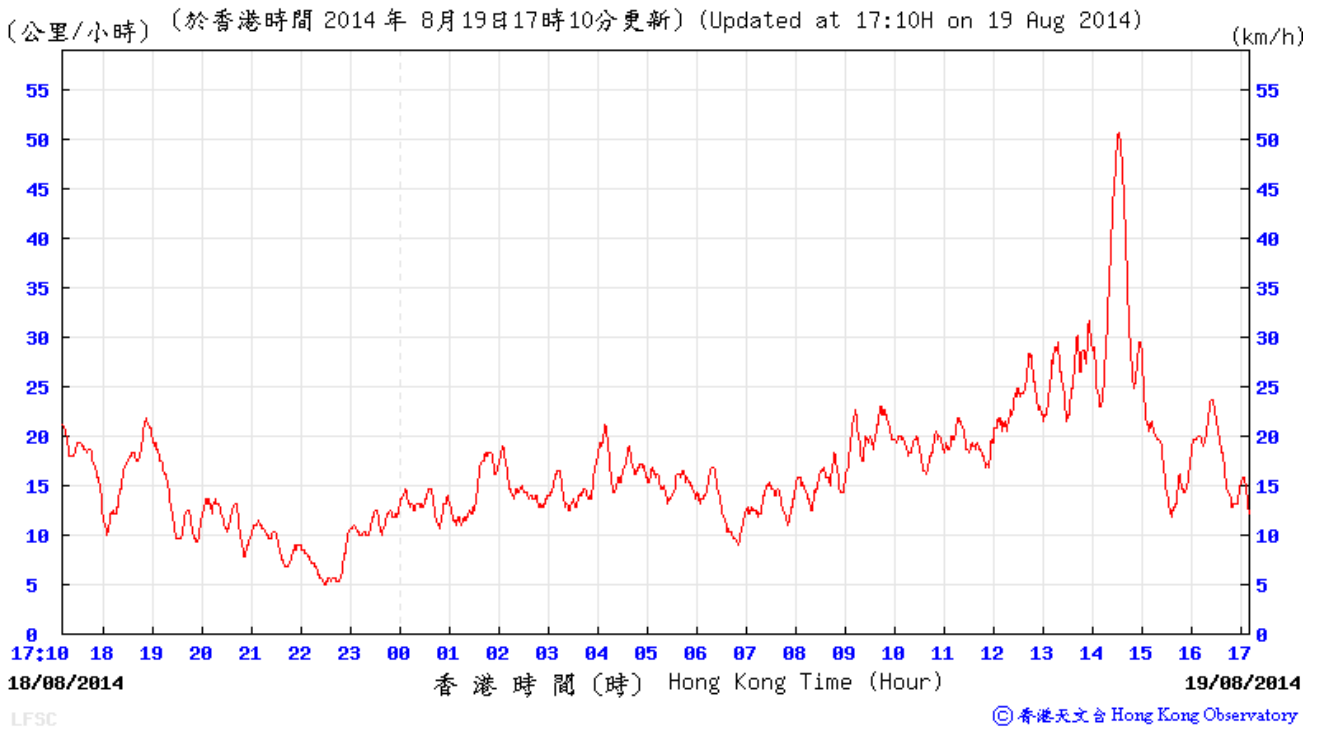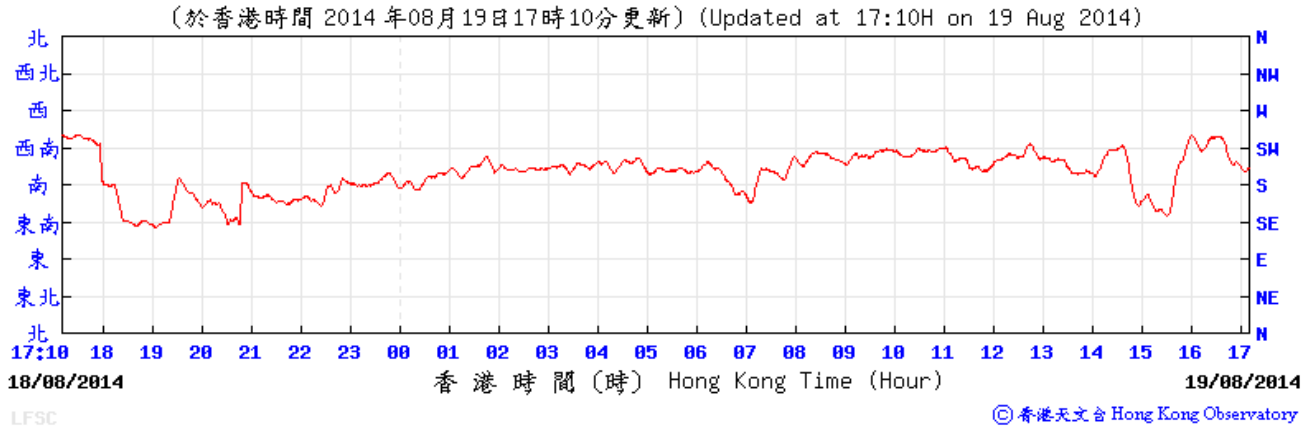




## Wind Data for Lau Fau Shan

20 August 2014

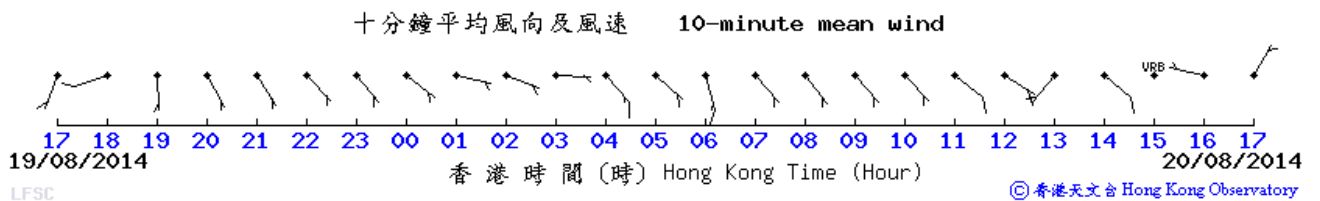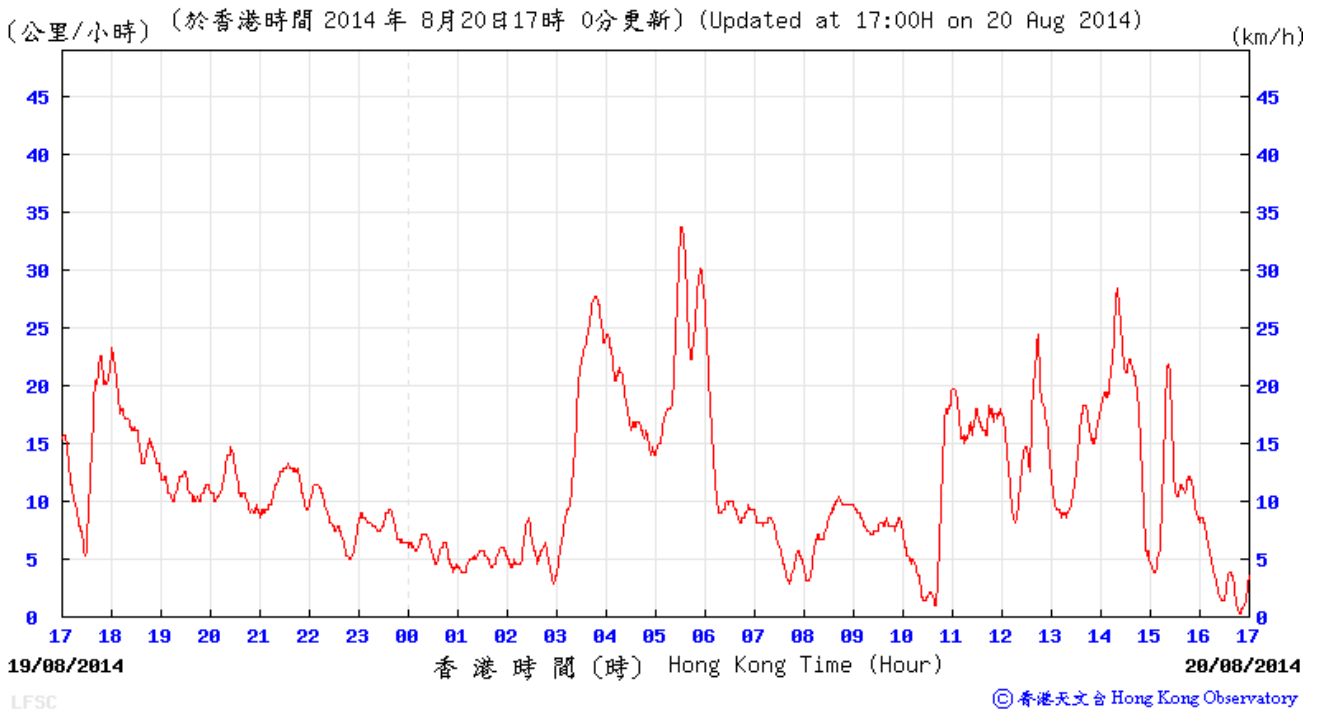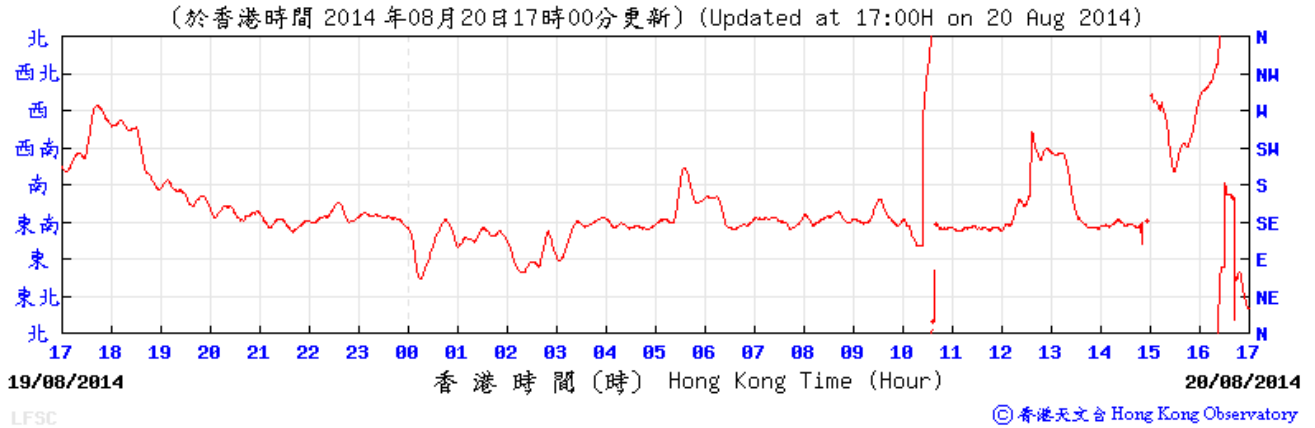




## Wind Data for Lau Fau Shan

25 August 2014

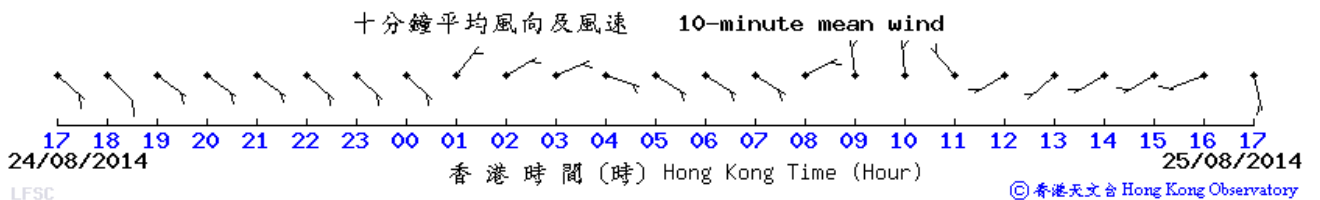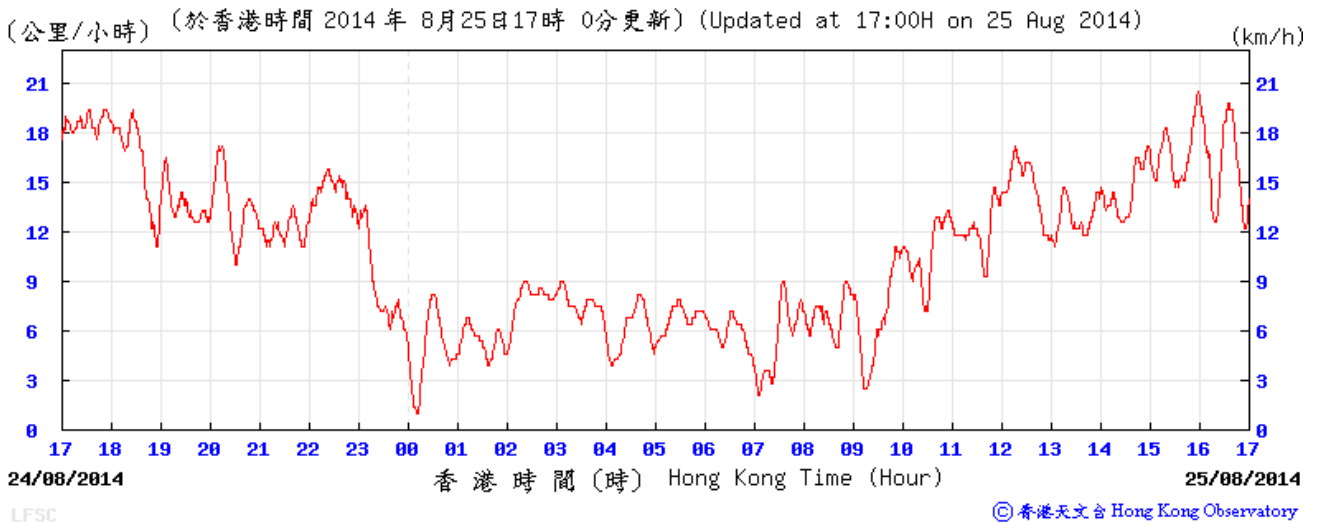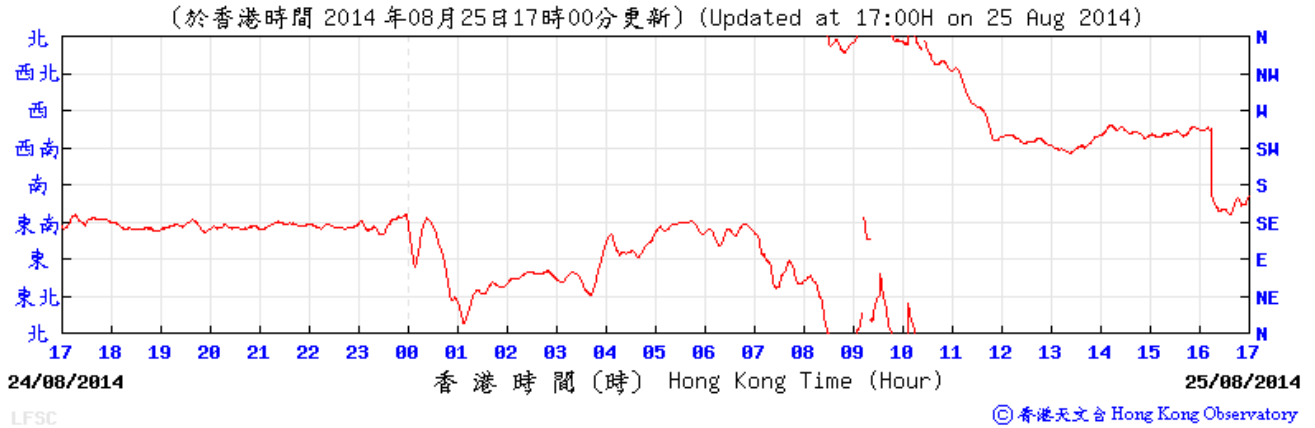

## Wind Data for Lau Fau Shan




26 August 2014

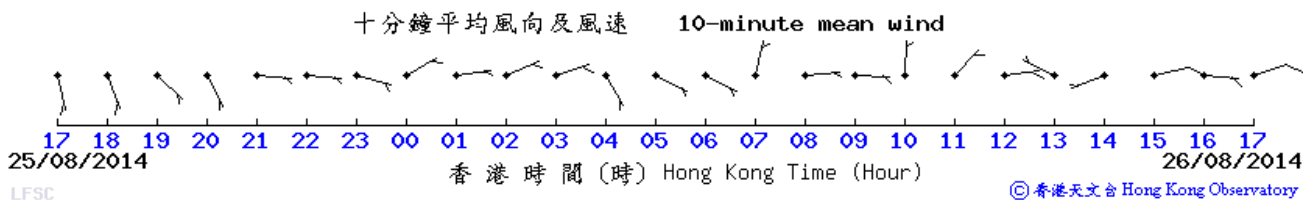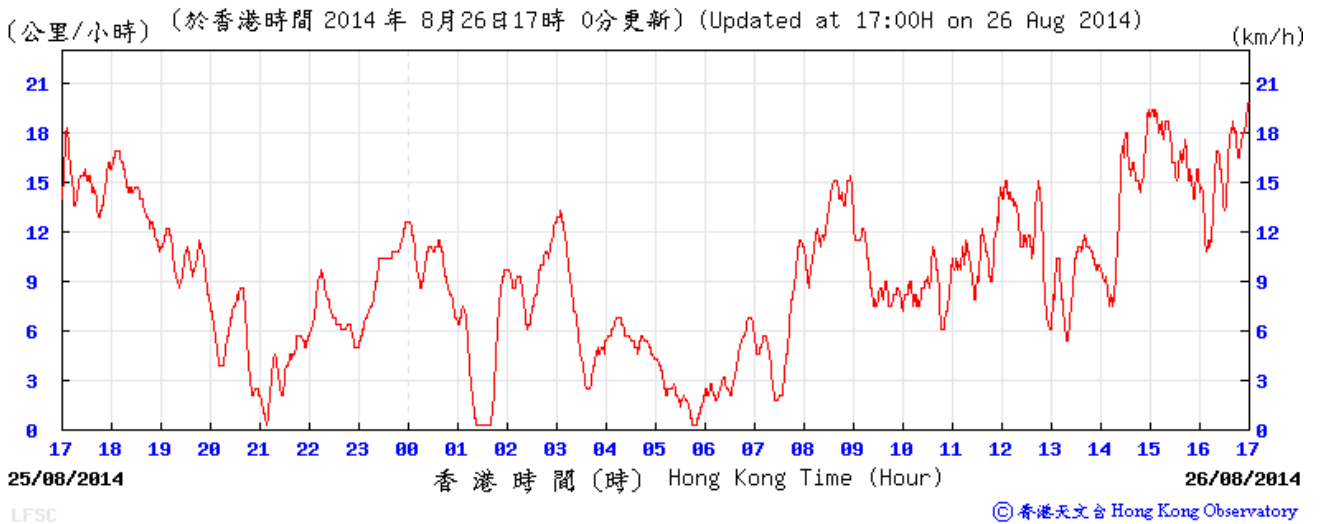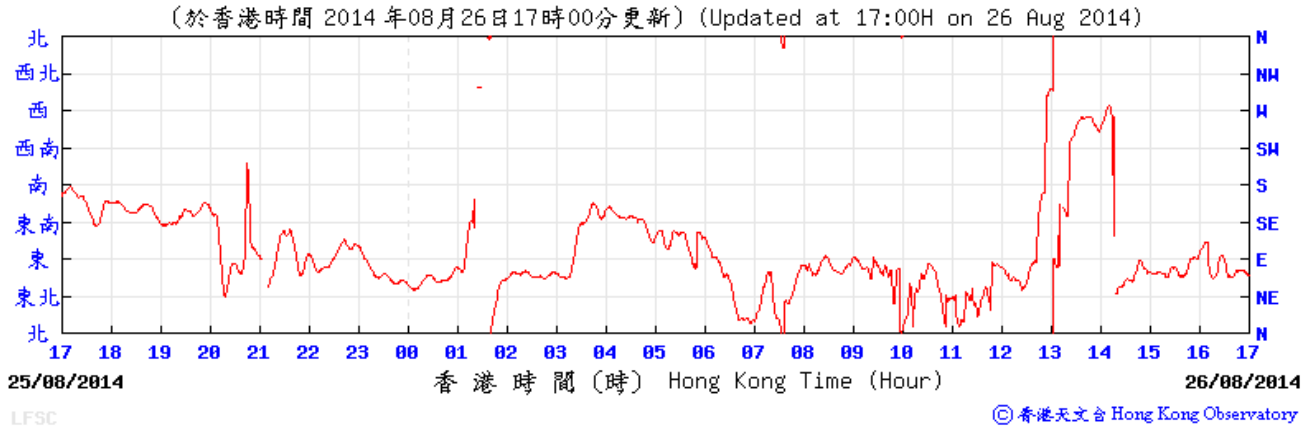






## Wind Data for Lau Fau Shan

29 August 2014

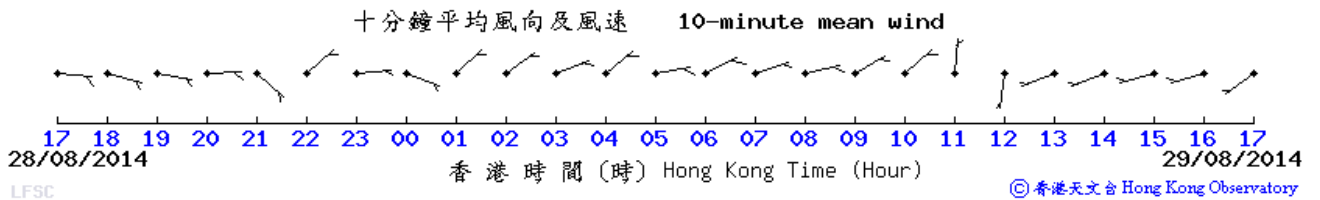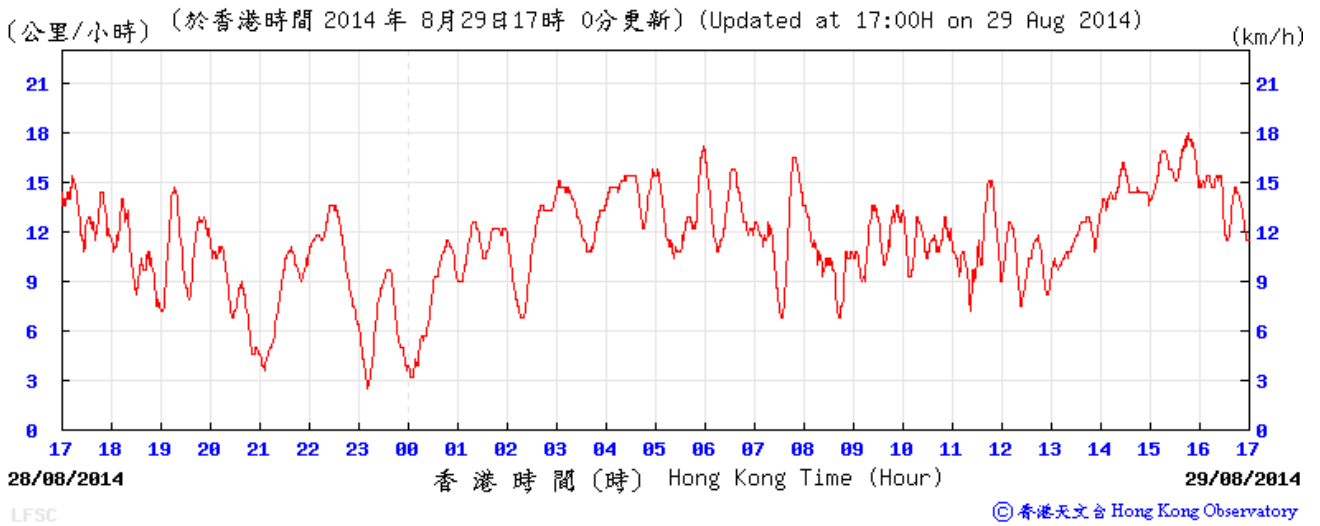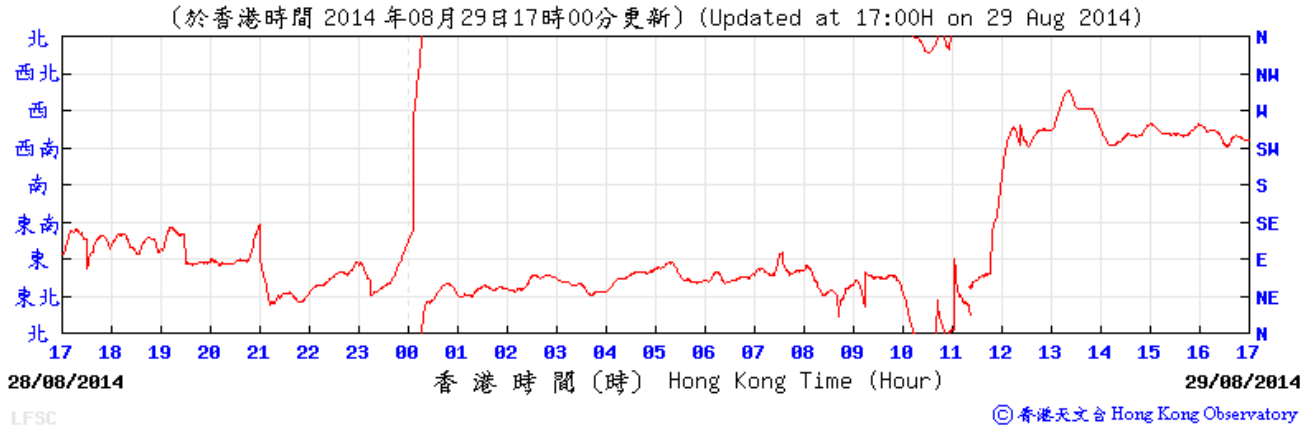

## Wind Data for Lau Fau Shan

30 August 2014

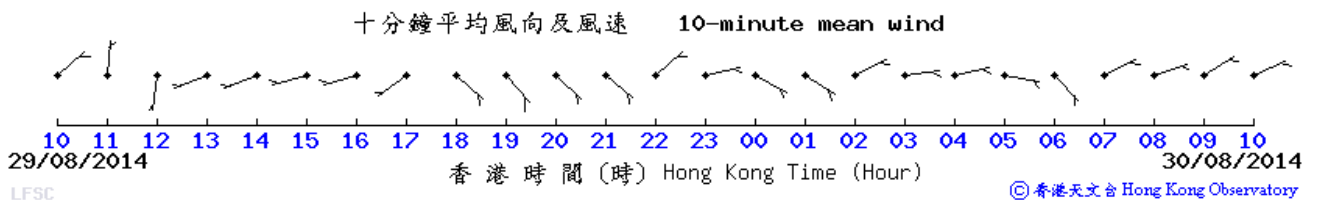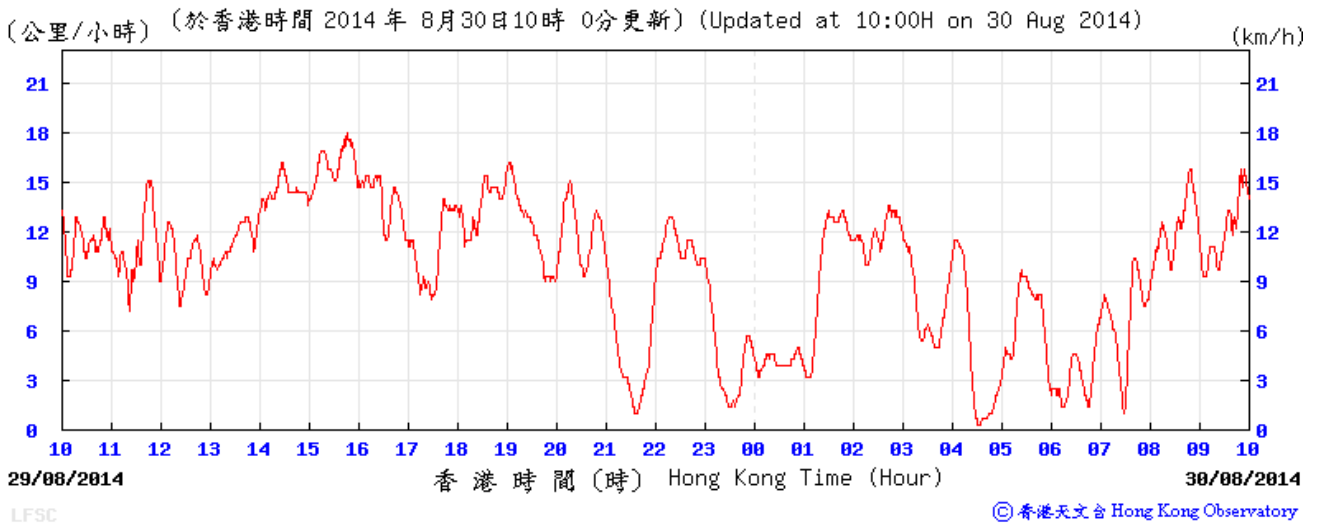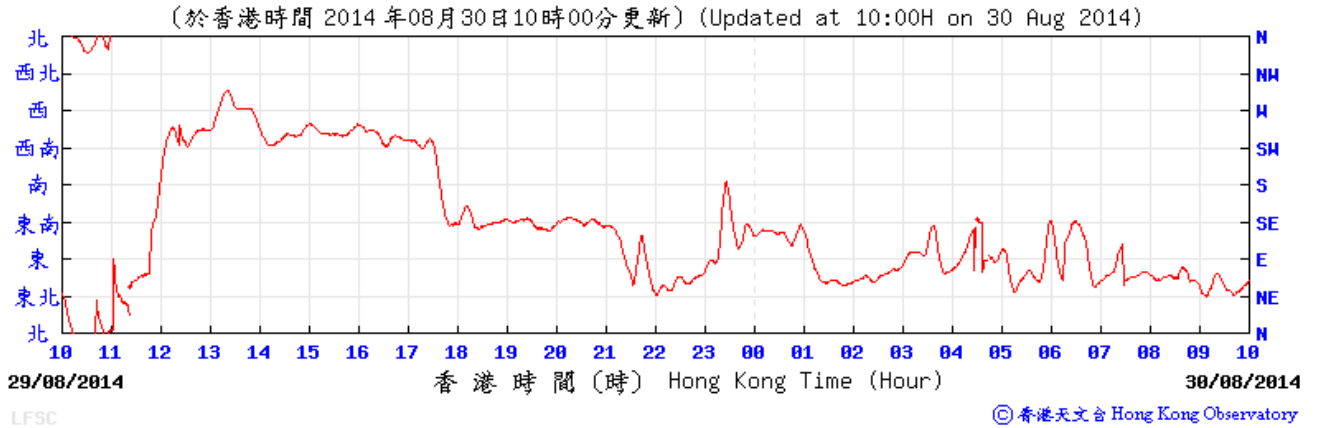

**EXTRACT OF METEOROLOGICAL OBSERVATIONS FOR HONG KONG,  
AUGUST 2014 (Table 1)**

Date AUGUST	Mean Pressure (hPa)	Air Temperature			Mean Dew Point Temperature (deg. C)	Mean Relative Humidity (%)	Mean Amount of Cloud (%)	Total Rainfall (mm)
		Maximum (deg. C)	Mean (deg. C)	Minimum (deg. C)				
1	1001.0	34.6	30.2	25.9	25.7	78	39	5.9
2	1001.4	32.8	29.7	26.1	25.6	79	47	10.7
3	1001.9	32.3	29.3	26.1	25.7	82	60	39.3
4	1002.4	32.7	30.2	27.2	26.4	81	72	12.0
5	1003.4	30.7	29.2	27.3	26.6	86	73	21.1
6	1003.6	31.1	28.1	26.1	25.7	87	83	36.5
7	1003.3	31.0	29.0	26.7	26.1	85	87	14.5
8	1003.0	32.3	29.9	28.1	25.4	78	57	-
9	1004.4	32.0	30.1	28.8	25.5	77	72	-
10	1004.7	32.4	29.8	27.5	25.5	78	74	5.1
11	1003.3	32.1	29.9	28.5	26.1	80	78	Trace
12	1002.1	31.9	28.9	25.2	26.0	85	88	102.9
13	1003.5	28.8	26.0	24.3	25.3	96	93	166.1
14	1008.0	30.7	28.1	25.4	25.4	85	79	0.5
15	1010.1	32.4	29.2	26.7	24.8	78	53	-
16	1008.6	31.9	29.3	27.9	25.1	79	65	-
17	1007.3	31.9	29.3	27.3	25.0	78	49	-
18	1008.2	32.4	29.6	27.7	24.9	76	76	-
19	1008.7	31.3	27.4	24.6	24.7	86	93	42.1
20	1010.4	26.5	24.7	22.9	23.9	95	88	88.8
21	1010.7	30.7	26.9	23.9	24.3	86	68	0.1
22	1010.6	31.9	28.5	26.6	24.9	81	61	-
23	1009.8	32.2	29.1	27.2	24.9	78	51	Trace
24	1009.7	33.2	29.1	26.9	24.4	76	40	-
25	1010.1	34.1	29.9	27.3	25.2	77	40	-
26	1010.6	34.2	30.1	27.9	25.4	76	40	-
27	1010.1	31.7	29.4	28.2	25.0	78	77	0.7
28	1012.1	32.1	29.5	28.1	25.8	81	79	0.3
29	1012.5	34.1	30.1	27.5	25.1	75	53	-
30	1011.1	34.0	30.1	27.8	25.0	75	60	-
31	1009.7	31.2	29.1	28.2	25.8	83	84	1.6
Mean/Total	1007.0	32.0	29.0	26.8	25.3	81	67	548.2
Normal*	1005.2	31.1	28.6	26.6	25.0	81	69	432.2

Station

Hong Kong Observatory

**EXTRACT OF METEOROLOGICAL OBSERVATIONS FOR HONG KONG,  
AUGUST 2014 (Table 2)**

Date AUGUST	Number of hours of Reduced Visibility# (hours)	Total Bright Sunshine (hours)	Daily Global Solar Radiation (MJ/m <sup>2</sup> )	Total Evaporation (mm)	Prevailing Wind Direction (degrees)	Mean Wind Speed (km/h)
1	0	10.6	23.72	6.5	260	22.7
2	0	10.7	24.56	N.A.	230	16.3
3	0	9.7	22.76	4.5	230	13.3
4	0	6.9	20.91	4.6	230	12.1
5	0	2.0	10.69	5.9	050	10.2
6	0	3.2	11.03	3.2	220	12.9
7	0	5.0	16.25	4.1	240	21.8
8	0	11.0	25.54	6.6	240	20.4
9	0	7.7	21.02	5.8	230	25.9
10	0	7.3	20.61	6.2	240	27.2
11	0	6.1	19.19	5.0	240	22.1
12	0	3.4	13.84	N.A.	230	23.3
13	0	-	1.03	N.A.	220	16.2
14	0	3.3	11.68	2.8	230	18.9
15	0	10.9	26.71	6.5	230	13.7
16	0	9.0	22.39	7.1	250	23.1
17	0	11.2	26.32	3.8	240	20.4
18	0	10.7	25.03	6.1	230	22.8
19	0	2.0	12.58	N.A.	240	26.9
20	0	-	4.71	3.4	030	6.0
21	0	5.4	16.81	3.2	170	8.1
22	0	4.9	12.87	3.1	160	6.9
23	0	6.3	17.28	3.6	200	8.0
24	0	9.2	21.52	4.9	140	8.6
25	0	11.2	27.00	6.0	120	11.0
26	0	10.3	25.94	7.4	060	18.2
27	0	2.7	13.01	4.2	070	37.3
28	0	5.7	18.13	4.6	120	22.4
29	0	10.9	25.05	5.7	060	14.5
30	0	11.0	25.63	7.1	060	16.9
31	0	3.7	12.36	3.5	110	20.3
Mean/Total	0	212.0	18.59	135.4^	240	17.7
Normal*	55.7§	188.9	15.63	134.9	230	19.4
Station	Hong Kong	King's Park			Waglan Island	

International Airport
-----------------------

The minimum pressure recorded at the Hong Kong Observatory was 998.1 hectopascals at 1606 HKT on 1 August.

The maximum air temperature recorded at the Hong Kong Observatory was 34.6 degrees C at 1519 HKT on 1 August.

The minimum air temperature recorded at the Hong Kong Observatory was 22.9 degrees C at 0556 HKT on 20 August.

The maximum gust peak speed recorded at Waglan Island was 79 kilometres per hour from 320 degrees at 2126 HKT on 1 August.

The maximum instantaneous rate of rainfall recorded at the Hong Kong Observatory was 236 millimetres per hour at 0555 HKT on 13 August.

# Reduced visibility refers to visibility below 8 kilometres when there is no fog, mist, or precipitation.

-The visibility readings at the Hong Kong International Airport are based on hourly observations by professional meteorological observers in 2004 and before, and average readings over the 10-minute period before the clock hour of the visibility meter near the middle of the south runway from 2005 onwards. The change of the data source in 2005 is an improvement of the visibility assessment using instrumented observations following the international trend.

-Before 10 October 2007, the number of hours of reduced visibility at the Hong Kong International Airport in 2005 and thereafter displayed in this web page was based on hourly visibility observations by professional meteorological observers. Since 10 October 2007, the data have been revised using the average visibility readings over the 10- minute period before the clock hour, as recorded by the visibility meter near the middle of the south runway.

\* 1981 - 2010 Climatological Normal, unless otherwise specified

§ 1997-2013 Mean value

^ Total for 27 days

## Appendix H. Ecological Monitoring Conducted

August 2014	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Mammals					✓							✓			
Birds					✓							✓			
Herpetofauna												✓			
Dragonflies & butterflies												✓			
Water Quality															
Inspection Visits	✓				✓			✓				✓			✓

August 2014	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
Mammals				✓							✓					
Birds				✓							✓					
Herpetofauna											✓					
Dragonflies & butterflies											✓					
Water Quality												✓				
Inspection Visits				✓			✓				✓			✓		

Note: Light grey cells indicate public holidays, Saturdays or Sundays. Black cells indicate survey item not required in the reporting month



# Appendix I. Summary of Bird Surveys Conducted

Table I1. Summary of bird species of conservation importance and/or wetland-dependence recorded in the Survey Area (excluding the WRA)

Species Name <sup>(5)</sup>	Scientific Name <sup>(5)</sup>	Conservation Status <sup>(2)</sup>	August 2014		Records outside surveys
			Occurrence <sup>(3)</sup>	Mean <sup>(4)</sup>	
Little Grebe	<i>Tachybaptus ruficollis</i>	LC, (1)	4	9.8	✓
Great Egret	<i>Ardea alba</i>	PRC, (RC), (1)	4	2.0	✓
Little Egret	<i>Egretta garzetta</i>	PRC, (RC), (1)	4	9.5	✓
Eastern Cattle Egret	<i>Bubulcus coromandus</i>	LC, (1)	2	1.0	
Chinese Pond Heron	<i>Ardeola bacchus</i>	PRC, (RC), (1)	4	17.0	✓
Black-crowned Night Heron	<i>Nycticorax nycticorax</i>	(LC), (1)	1	0.3	✓
Yellow Bittern	<i>Ixobrychus sinensis</i>	LC, (1)	1	0.3	✓
Ferruginous Duck	<i>Aythya nyroca</i>	(1)	-	-	✓
White-breasted Waterhen	<i>Amaurornis phoenicurus</i>	(1)	4	1.3	✓
Eurasian Coot	<i>Fulica atra</i>	(1)	1	0.3	
Common Moorhen	<i>Gallinula chloropus</i>	(1)	1	0.5	✓
Green Sandpiper	<i>Tringa ochropus</i>	(1)	1	0.3	✓
Common Sandpiper	<i>Actitis hypoleucos</i>	(1)	3	1.3	✓
Pied Kingfisher	<i>Ceryle rudis</i>	(LC), (1)	2	0.8	✓
White-throated Kingfisher	<i>Halcyon smyrnensis</i>	LC, (1)	1	0.3	
Common Kingfisher	<i>Alcedo atthis</i>	(1)	3	2.8	✓
White Wagtail	<i>Motacilla alba</i>	(1)	4	4.0	✓
Collared Crow	<i>Corvus torquatus</i>	LC, (1)	1	0.5	
<b>No. of Species Recorded</b>			<b>18</b>		

- (1) Indicates wetland-dependant or wetland-associated species.  
 (2) Conservation status follows that of Fellowes *et al.* (2002) and BirdLife International listing (2011).  
 (3) Indicates number of surveys recorded within the reporting period.  
 (4) Refers to the mean number of individuals recorded in the reporting period (excluding the WRA)  
 (5) Follows HK bird list (dated 2013-8-24).

Table I2. Summary of bird species of conservation importance and/or wetland-dependence recorded in the WRA

Species Name <sup>(5)</sup>	Scientific Name <sup>(5)</sup>	Conservation Status <sup>(2)</sup>	August 2014		Records outside surveys
			Occurrence <sup>(3)</sup>	Mean <sup>(4)</sup>	
Little Grebe	<i>Tachybaptus ruficollis</i>	LC, (1)	4	1.8	✓
Great Egret	<i>Ardea alba</i>	PRC, (RC), (1)	-	-	✓
Little Egret	<i>Egretta garzetta</i>	PRC, (RC), (1)	3	1.3	✓
Chinese Pond Heron	<i>Ardeola bacchus</i>	PRC, (RC), (1)	3	1.5	✓
Yellow Bittern	<i>Ixobrychus sinensis</i>	LC, (1)	2	0.8	✓
Eurasian Hobby	<i>Falco subbuteo</i>	LC	-	-	✓
White-breasted Waterhen	<i>Amaurornis phoenicurus</i>	(1)	2	0.5	✓
Green Sandpiper	<i>Tringa ochropus</i>	(1)	-	-	✓
Wood Sandpiper	<i>Tringa glareola</i>	(LC), (1)	1	0.3	
Common Sandpiper	<i>Actitis hypoleucos</i>	(1)	1	0.3	✓



Species Name <sup>(5)</sup>	Scientific Name <sup>(5)</sup>	Conservation Status <sup>(2)</sup>	August 2014		Records outside surveys
			Occurrence <sup>(3)</sup>	Mean <sup>(4)</sup>	
Common Kingfisher	<i>Alcedo atthis</i>	(1)	3	1.3	✓
White Wagtail	<i>Motacilla alba</i>	(1)	3	1.8	✓
White-shouldered Starling	<i>Sturnia sinensis</i>	(LC), (1)	-	-	✓
<b>No. of Species Recorded</b>				<b>13</b>	

- (1) Indicates wetland-dependant or wetland-associated species.
- (2) Conservation status follows that of Fellowes *et al.* (2002) and BirdLife International listing (2011).
- (3) Indicates number of surveys recorded within the reporting period.
- (4) Refers to the mean number of individuals recorded in the reporting period at WRA.
- (5) Follows HK bird list (dated 2013-08-24).

## Appendix J. Summary of Herpetofauna, Mammal and Insect Surveys Conducted

Table J1. Summary of herpetofauna monitoring in the Survey Area (excluding the WRA)

Species Name	Scientific Name	Conservation Status <sup>(1)</sup>	August 2014		Records Outside Surveys
			Occurrence <sup>(2)</sup>	Mean <sup>(3)</sup>	
<b>Amphibian</b>		<b>No. of Species Recorded</b>	<b>1</b>		
Gunther's Frog	<i>Hylarana guentheri</i>	-	1	2.0	
<b>Reptile</b>		<b>No. of Species Recorded</b>	<b>0</b>		
(No Records in August 2014)		-			

(1) Conservation status follows that of Fellowes *et al.* (2002), Chan *et al.* (2005) and Karsen *et al.* (1998).

(2) Indicates number of surveys recorded within the reporting period.

(3) Refers to the mean number of individuals recorded in the reporting period (excluding the WRA).

Table J2. Summary of herpetofauna monitoring in the WRA

Species Name	Scientific Name	Conservation Status <sup>(1)</sup>	August 2014		Records Outside Surveys
			Occurrence <sup>(2)</sup>	Mean <sup>(3)</sup>	
<b>Amphibian</b>		<b>No. of Species Recorded</b>	<b>0</b>		
(No Records in August 2014)			-	-	
<b>Reptiles</b>		<b>No. of Species Recorded</b>	<b>0</b>		
(No Records in August 2014)			-	-	

(1) Conservation status follows that of Fellowes *et al.* (2002), Chan *et al.* (2005) and Karsen *et al.* (1998).

(2) Indicates number of surveys recorded within the reporting period.

(3) Refers to the mean number of individuals recorded in the reporting period in the WRA.

Table J3. Summary of mammal monitoring in the Survey Area (excluding the WRA)

Species Name	Scientific Name	Conservation Status <sup>(1)</sup>	August 2014	
			Occurrence <sup>(2)</sup>	Mean <sup>(3)</sup>
<b>Mammal</b>		<b>No. of Species Recorded</b>	<b>0</b>	
(No Records in August 2014)			-	-

(1) Conservation status follows that of Fellowes *et al.* (2002) and Shek (2006).

(2) Indicates number of surveys recorded within the reporting period.

(3) Refers to the mean number of individuals recorded in the reporting period (excluding the WRA).

Table J4. Summary of mammal monitoring in the WRA

Species Name	Scientific Name	Conservation Status <sup>(1)</sup>	August 2014		Records Outside Surveys
			Occurrence <sup>(2)</sup>	Mean <sup>(3)</sup>	
<b>Mammal</b>	<b>No. of Species Recorded</b>		<b>0</b>		
(No Records in August 2014)					

(1) Conservation status follows that of Fellowes *et al.* (2002) and Shek (2006).

(2) Indicates number of surveys recorded within the reporting period.

(3) Refers to the mean number of individuals recorded in the reporting period in the WRA.

Table J5. Summary of dragonflies (odonata) and butterfly monitoring in the Survey Area (excluding WRA)

Common Name	Scientific Name	Conservation Status <sup>(1)</sup>	August 2014	
			Occurrence <sup>(2)</sup>	Mean <sup>(3)</sup>
<b>Odonata</b>	<b>No. of Species Recorded</b>		<b>6</b>	
Asian Amberwing	<i>Brachythemis contaminata</i>	-	1	2.5
Common Flangetail	<i>Ictinogomphus pertinax</i>	-	1	1.5
Evening Skimmer	<i>Tholymis tillarga</i>	-	1	0.5
Green Skimmer	<i>Orthetrum sabina sabina</i>	-	2	6.0
Variegated Flutterer	<i>Rhyothemis variegata arria</i>	-	2	2.0
Wandering Glider	<i>Pantala flavescens</i>	-	2	33.0
<b>Butterfly</b>	<b>No. of Species Recorded</b>		<b>0</b>	
(No Recorded in August 2014)			-	-

(1) Conservation status follows that of Fellowes *et al.* (2002), Lo & Hui (2004), Tam *et al.* (2011) and Young & Yiu (2002).

(2) Indicates number of surveys recorded within the reporting period.

(3) Refers to the mean number of individuals recorded in the survey (excluding the WRA).

Table J6. Summary of dragonfly (odonata) and butterfly monitoring in the WRA

Common Name	Scientific Name	Conservation Status <sup>(1)</sup>	August 2014	
			Occurrence <sup>(2)</sup>	Mean <sup>(3)</sup>
<b>Odonata</b>	<b>No. of Species Recorded</b>		<b>10</b>	
Blue Dasher	<i>Brachydiplax chalybea flavovittata</i>	-	1	0.5
Common Flangetail	<i>Ictinogomphus pertinax</i>	-	2	2.5
Crimson Darter	<i>Crocothemis servilla servilla</i>	-	1	0.5
Green Skimmer	<i>Orthetrum sabina sabina</i>	-	2	12.0
Lesser Emperor	<i>Anax parthenope Julius</i>	-	1	0.5
Pied Skimmer	<i>Pseudothemis zonata</i>	-	1	1.0
Russet Percher	<i>Neurothemis fulvia</i>	-	1	0.5
Saddlebag Glider	<i>Tramea Virginia</i>	-	2	4.0
Variegated Flutterer	<i>Rhyothemis variegata arria</i>	-	2	11.5
Wandering Glider	<i>Pantala flavescens</i>	-	2	13.0
<b>Butterfly</b>	<b>No. of Species Recorded</b>		<b>2</b>	
Common Grass Yellow	<i>Eurema hecabe hecabe</i>	-	1	0.5
Dark Brand Bush Brown	<i>Mycalesis mineus mineus</i>	-	1	0.5

(1) Conservation status follows that of Fellowes *et al.* (2002), Lo & Hui (2004), Tam *et al.* (2011) and Young & Yiu (2002).

(2) Indicates number of surveys recorded within the reporting period.

(3) Refers to the mean number of individuals recorded in the reporting period in the WRA.



## Appendix K. Summary of Monitoring of Water Quality associated with Ecological Monitoring Conducted

Table K1. Water quality at WRA in August 2014

Cell No.	Temp. (°C)	pH	Salinity (ppt)	Turb (mg/L)	DO (mg/L)	Water Level (cm)
1	27.3	<b>8.08</b>	0.48	8.6	5.5	180
2	27.8	<b>8.01</b>	0.50	8.9	5.9	160
3	27.5	7.94	0.47	9.2	6.0	170
4	27.6	<b>8.06</b>	0.39	8.8	6.0	170

Note: Values highlighted in bold indicate that action level is reached; whereas values in bold and underline indicate that limit level is reached.

# Appendix L. Environmental Mitigation Measures - Implementation Status

## Air Quality – Recommended Mitigation Measures

Air Quality Mitigation Measures during construction	Implementation Status
• access roads should be sprayed with water or dust suppression chemical to maintain the entire road surface wet or paved;	✓
• every stock of more than 20 bags of cement or dry PFA should be covered entirely by impervious sheeting or placed in an area sheltered on the top and the 3 sides;	N/A
• de-bagging, batching or mixing process should be carried out in sheltered areas during the use of bagged cement;	N/A
• use of effective dust screens, sheeting or netting to be provided to enclose dry scaffolding which may be provided from the ground floor level of the building or if a canopy is provided at the first floor level, from the first floor level, up to the highest level (maximum four floors for this Project) of the scaffolding where scaffolding is erected around the perimeter of a building under construction;	N/A
• dump trucks for material transport should be totally enclosed using impervious sheeting;	✓
• any excavated dusty materials or stockpile of dusty materials should be covered entirely by impervious sheeting or sprayed with water so as to maintain the entire surface wet, and recovered or backfilled or reinstated within 24 hours of the excavation or unloading;	✓
• dusty materials remaining after a stockpile is removed should be wetted with water;	✓
• the area where vehicle washing takes place and the section of the road between the washing facilities and the exit point should be paved with e.g. concrete, bituminous materials or hardcore or similar;	✓
• the portion of road leading only to a construction site that is within 30m of a designated vehicle entrance or exit should be kept clear of dusty materials;	✓
• stockpile of dusty materials to be either covered entirely by impervious sheeting, placed in an area sheltered on the top and the 3 sides; or sprayed with water so as to maintain the entire surface wet;	✓
• all dusty materials to be sprayed with water prior to any loading, unloading or transfer operation so as to maintain the dusty material wet;	✓
• vehicle speed to be limited to 10 kph except on completed access roads;	✓
• every vehicle should be washed to remove any dusty materials from its body and wheels before leaving the construction sites;	✓
• the load of dusty materials carried by vehicle leaving a construction site should be covered entirely by clean impervious sheeting to ensure that the dusty materials do not leak from the vehicle;	✓
• the working area of excavation should be sprayed with water immediately before, during and immediately after (as necessary) the operations so as to maintain the entire surface wet;	✓
<b>Odour mitigation measures</b>	
• all malodorous excavated material should be placed as far as possible from any ASRs;	N/A
• the stockpiled malodorous material should be removed from site as soon as possible; and	N/A
• the stockpiled malodorous material should be covered entirely by plastic tarpaulin sheets.	N/A

## Noise – Recommended Mitigation Measures

Noise Mitigation Measures during construction	Implementation Status
• only well-maintained plant should be operated on-site and plant should be serviced regularly during the construction works;	✓

Noise Mitigation Measures during construction	Implementation Status
<ul style="list-style-type: none"> <li>machines and plant that may be in intermittent use should be shut down between work periods or should be throttled down to a minimum;</li> </ul>	✓
<ul style="list-style-type: none"> <li>plant known to emit noise strongly in one direction should, where possible, be orientated to direct noise away from the NSRs;</li> </ul>	✓
<ul style="list-style-type: none"> <li>silencers or mufflers on construction equipment should be utilised and should be properly maintained during the construction period;</li> </ul>	N/A
<ul style="list-style-type: none"> <li>mobile plant should be sited as far away from NSRs as possible;</li> </ul>	✓
<ul style="list-style-type: none"> <li>material stockpiles and other structures should be effectively utilised, where practicable, to screen noise from on-site construction activities;</li> </ul>	N/A
<ul style="list-style-type: none"> <li>air compressor and hand-held breaker should be fitted with valid noise emission labels during operation; and</li> </ul>	✓
<ul style="list-style-type: none"> <li>The Contractor shall at all times comply with all current statutory environmental legislation.</li> </ul>	✓
<p><i>Selection of quieter plant and working methods</i></p> <p>The Contractor shall obtain particular models of plant that are quieter than standards given in GW-TM. The list of assumed quieter plants can be found in the <b>Table 4-14</b> of the EIA report. The Contractor shall select from the available models achieving the assumed sound levels while making reference to the GW-TM and BS5228: Part 1: 1997</p>	✓
<p><i>Use of Noise Barriers</i></p> <p>Noise barriers are proposed along the site boundary to block the direct line of sight from the most affected NSRs to the major noise contribution construction phases. The height of the noise barriers ranged from 9-10m. The noise barriers shall be built before the commencement of construction works in order to ensure protection to nearby NSRs. The noise barrier should have a surface density of at least 10kg/m<sup>2</sup> or material providing equivalent transmission loss. The noise barriers and hoardings should have no gaps and openings to avoid noise leakage.</p>	✓

### Water Quality – Recommended Mitigation Measures

Water Quality Mitigation Measures during construction	Implementation Status
<ul style="list-style-type: none"> <li>The site should be confined to avoid silt runoff to the site.</li> </ul>	✓
<ul style="list-style-type: none"> <li>No discharge of silty water into the storm drain and drainage channel within and the vicinity of the site.</li> </ul>	✓
<ul style="list-style-type: none"> <li>Any soil contaminated with chemicals/oils shall be removed from site and the void created shall be filled with suitable materials.</li> </ul>	✓
<ul style="list-style-type: none"> <li>Stockpiles to be covered by tarpaulin to avoid spreading of materials during rainstorms;</li> </ul>	✓
<ul style="list-style-type: none"> <li>Suitable containers shall be used to hold the chemical wastes to avoid leakage or spillage during storage, handling and transport;</li> </ul>	✓
<ul style="list-style-type: none"> <li>Chemical waste containers shall be labelled with appropriate warning signs in English and Chinese to avoid accidents. there shall also be clear instructions showing what action to take in the event of an accidental;</li> </ul>	✓
<ul style="list-style-type: none"> <li>Storage areas shall be selected at safe locations on site and adequate space shall be allocated to the storage area;</li> </ul>	✓
<ul style="list-style-type: none"> <li>Any construction plant which causes pollution to the water system due to leakage of oil or fuel shall be removed off-site immediately;</li> </ul>	N/A
<ul style="list-style-type: none"> <li>Spillage or leakage of chemical waste to be controlled by using suitable absorbent materials;</li> </ul>	✓



Water Quality Mitigation Measures during construction	Implementation Status
<ul style="list-style-type: none"> <li>Chemicals will always be stored on drip trays or in bunded areas where the volume is 110% of the stored volume;</li> </ul>	✓
<ul style="list-style-type: none"> <li>Regular clearance of domestic waste generated in the temporary sanitary facilities to avoid waste water spillage.</li> </ul>	✓
<ul style="list-style-type: none"> <li>Temporary sanitary facilities to be provided for on-site workers during construction.</li> </ul>	✓
<ul style="list-style-type: none"> <li>Temporary drainage channel and associated facilities will be provided to collect the surface runoff generated within the Project Area during the construction phase.</li> </ul>	✓
<ul style="list-style-type: none"> <li>Sandbags or silt traps will need to be placed to avoid silt runoff to the drainage channel draining the water in the northern ditch. Draining of the ditches should avoid rainy weather.</li> </ul>	✓
<ul style="list-style-type: none"> <li>Excavated soil which needs to be temporarily stockpiled should be stored in a specially designated area and provided with a tarpaulin cover to avoid runoff into the drainage channels.</li> </ul>	✓

#### Waste Management – Recommended Mitigation Measures

Waste Management Mitigation Measures during construction	Implementation Status
<p><i>Site Clearance Waste</i></p> <ul style="list-style-type: none"> <li>The major construction works of Wo Shang Wai is in the development of residential buildings and other associated facilities (club house, tennis courts, etc). The amount of site clearance works will be limited with the exception of the excavated materials. The thin layer of vegetation removed can be stored and reused for landscaping.</li> </ul>	✓
<p><i>Excavated Materials</i></p> <p>The intention is to maximize the reuse of the excavated materials on-site as fill materials.</p>	✓
<p><i>Imported Filling Material</i></p> <p>The excavated/imported filling material may have to be temporarily stockpiled on-site for the construction of road embankment and foundation of viaduct substructure. Control measures should be taken at the stockpiling area to prevent the generation of dust and pollution of stormwater channels. However, to eliminate the risk of blocking drains in the wet season, it is recommended that stockpiling of excavated materials at during wet season should be avoided as far as practicable.</p>	✓
<p><i>Construction and Demolition Materials</i></p> <p>Careful design, planning and good site management can minimise over-ordering and generation of waste materials such as concrete, mortars and cement grouts. The design of formwork should maximise the use of standard wooden panels so that high reuse levels can be achieved. Alternatives such as steel formwork of plastic facing should be considered to increase the potential for reuse.</p>	✓
<p>The Contractor should reuse any C&amp;D material on-site. C&amp;D waste should be segregated and stored in different containers to other wastes to encourage the re-use or recycling of materials and their proper disposal.</p>	✓
<p><i>Chemical Waste</i></p> <p>For those processes which generate chemical waste, it may be possible to find alternatives which generate reduced quantities or even no chemical waste, or less dangerous types of chemical waste.</p>	N/A
<p>Containers used for the storage of chemical wastes should:</p>	
<ul style="list-style-type: none"> <li>be suitable for the substance they are holding, resistant to corrosion, maintained in a good condition, and securely closed:</li> </ul>	✓

Waste Management Mitigation Measures during construction	Implementation Status
<ul style="list-style-type: none"> <li>have a capacity of less than 450 litres unless the specification have been approved by the EPD; and</li> </ul>	✓
<ul style="list-style-type: none"> <li>display a label in English and Chinese in accordance with instructions prescribed in Schedule 2 of the Regulations,</li> </ul>	✓
The storage area for chemical wastes should:	
<ul style="list-style-type: none"> <li>be clearly labelled and used solely for the storage of chemical waste;</li> </ul>	✓
<ul style="list-style-type: none"> <li>be enclosed on at least 3 sides;</li> </ul>	✓
<ul style="list-style-type: none"> <li>have an impermeable floor and bunding, of capacity to accommodate 110% of the volume of the largest container or 20% by volume of the chemical waste stored in that area whichever is the greatest;</li> </ul>	✓
<ul style="list-style-type: none"> <li>have adequate ventilation;</li> </ul>	✓
<ul style="list-style-type: none"> <li>be covered to prevent rainfall entering (water collected within the bund must be tested and disposed as chemical waste if necessary); and</li> </ul>	✓
<ul style="list-style-type: none"> <li>be arranged so that incompatible materials are adequately separated.</li> </ul>	✓
Disposal of chemical waste should:	
<ul style="list-style-type: none"> <li>be via a licensed waste collector; and</li> </ul>	N/A
<ul style="list-style-type: none"> <li>be to a facility licensed to receive chemical waste, such as the Chemical Waste Treatment Facility which also offers a chemical waste collection service and can supply the necessary storage containers, or</li> </ul>	N/A
<ul style="list-style-type: none"> <li>to be reuser of the waste, under approval from the EPD.</li> </ul>	N/A
<i>General Refuse</i>	
Should be stored in enclosed bins or compaction units separate from C&D and chemical wastes. The Contractor should employ a reputable waste collector to remove general refuse from the site, separate from C&D and chemical wastes, on a regular basis to minimise odour, pest and litter impacts. Burning of refuse on construction sites is prohibited by law.	✓
<b>Disposal of Excavated Sediment at Sea</b>	
The requirements and procedures for excavated sediment disposal are specified under the ETWB TCW No. 34/2002 and PNAP 252. The management of the excavation, use and disposal of sediment is monitored by Fill Management Committee, whilst the licensing of marine dumping is the responsibility of the Director of Environmental Protection (DEP).	N/A
The excavated sediment would be loaded onto barges or other appropriate vessel and transported to the designated marine disposal site. Category L sediment and Category M sediment passing the biological test would be suitable for disposal at a gazetted open sea disposal ground. Category M sediment failing the biological test and Category H sediment passing the biological test would require confined marine disposal.	N/A
During transportation and disposal of the dredged sediment, the following measures should be taken to minimize potential impacts on water quality: -	N/A
<ul style="list-style-type: none"> <li>Bottom opening transport vessels should be fitted with tight fitting seals to prevent leakage of material. Excess material should be cleaned from the decks and exposed fittings of vessels before the vessel is moved.</li> </ul>	N/A
<ul style="list-style-type: none"> <li>Monitoring of the barge loading should be conducted to ensure that loss of material does not take place during transportation. Transport barges or vessels should be equipped with automatic self-monitoring devices as specified by the DEP.</li> </ul>	N/A

Ecology – Recommended Mitigation Measures

Ecology Mitigation Measures during construction	Implementation Status
<i>Clear Definition of Site Limit</i>	
<p>Clear definition of the site limit should be provided in order to minimize and confine the disturbance during the construction period, especially the northern limit of the Site which is adjacent to fishponds within the Conservation Area (CA) zone and are considered to be ecological sensitive receivers.</p> <p>During wetland construction stage the WRA boundary will be delineated using a temporary hoarding in order to reduce disturbance to off-site habitats and wildlife. During the establishment phase this hoarding will be replaced with a 1 m high chain-link fence in order to reduce disturbance to the WRA through access by humans and dogs, and a hoarding will be established around the residential construction site.</p>	<p style="text-align: center;">✓</p> <p style="text-align: center;">N/A</p>
<i>Dust and Noise Suppression and Avoidance of Water Pollution</i>	
<p>Good site practices of dust and noise suppression should be strictly implemented to ensure that disturbance is minimized to acceptable levels. Mitigation measures for the off-site disturbance impacts on the fishponds in the CA include hoarding at the northern site boundary during construction of the WRA to reduce noise and dust impacts to the adjacent habitats. Through the use of quieter plant and temporary/movable noise barriers, the noise level would be reduced significantly to an acceptable level. Hoarding at the northern boundary should be replaced with a 1 m high chain-link fence following construction and the WRA will then act as a buffer between the existing wetland areas and the residential part of the site until construction is completed. Hoarding will be retained between the WRA and ongoing construction work to avoid visual disturbance and reduce noise and dust emissions. Pollution of watercourses and sedimentary runoff will be minimized by good site practice, especially the containment of water and sediment within the site for removal. These standard noise and air and water quality site practices are considered to be effective measures for minimizing the disturbance impact during the construction period.</p>	<p style="text-align: center;">✓</p>
<i>Planning of Construction Schedule</i>	
<p>The construction of the proposed project should be scheduled in phases. Because mitigation is preferably carried out in advance of the main works rather than after the completion of works, the construction of the WRA will commence at the start of the project. Construction work within the WRA is scheduled to take place in a single wet season, followed by 1.5 years of wetland establishment. During the wetland establishment period no noisy work will be undertaken within the WRA to minimize the disturbance to off-site habitats and wildlife.</p>	<p style="text-align: center;">N/A</p>
<i>Reusing Onsite Materials</i>	
<p>Soil and plants on-site should be reused (e.g. used as fill material) as far as practical. Stock piles of these reusable materials should be stored in an appropriate area on-site. In particular, the re-use of the wetland soils and topsoil should be considered.</p>	<p style="text-align: center;">✓</p>
<p><b>Construction of the Wetland Restoration Area</b></p> <p>The WRA will be operational within 2.5 yrs from the commencement of construction (1 year for site formation and 1.5 years for establishment) and will compensate for the predicted ecological impacts of the proposed development.</p>	<p style="text-align: center;">✓</p>

Landscape and Visual – Recommended Mitigation Measures

Landscape and Visual Mitigation Measures during construction	Implementation Status
CM1 - The construction area and contractor's temporary works areas should be minimised to avoid impacts on adjacent landscape.	✓
CM2 - Screening of construction works by hoarding / noise barriers.	✓ (Appendix M Photo 1 & 2*)
CM3 - Reduction of construction period to practical minimum.	✓
CM4 - Topsoil, where identified, should be stripped and stored for re-use in the construction of the soft landscape works, where the soil material meets acceptable criteria and where practical. The Contract Specification shall include storage and reuse of topsoil as appropriate.	✓
CM5 - Hydroseeding or sheeting of soil stockpiles with visually unobtrusive material (in earth tone).	✓
CM6 – Advance screen planting of noise barriers	✓ (Appendix M Photo 3 & 4*)
CM7 - Control night-time lighting and glare by hooding all lights.	N/A
CM8 - Ensure no run-off into streams adjacent to the Project Area.	✓
CM9 - Protection of existing trees on boundary of site shall be carefully protected during construction. Detailed Tree Protection Specification shall be provided in the Contract Specification. Under this specification, the Contractor shall be required to submit, for approval, a detailed working method statement for the protection of trees prior to undertaking any works adjacent to all retained trees, including trees in contractor's works areas. (Tree protection measures will be detailed at S16 and Tree Removal Application stage).	✓
CM10 - Trees unavoidably affected by the works shall be transplanted where practical. Trees should be transplanted straight to their destinations and not held in a nursery. A detailed Tree Transplanting Specification shall be provided in the Contract Specification, if applicable. Sufficient time for necessary tree root and crown preparation periods shall be allowed in the project programme.	✓

Legend:

- ✓ Implemented
- x Not implemented
- P Partially implemented
- N/A Not applicable
- \* Photos are in Appendix M

## Appendix M. Landscape and Visual Audit Photos



Photo 1: The Construction works have been screened by hoarding (CM2)



Photo 2: The wetland areas are being established, with the ponds are being seasonally filled with rain water. (CM2)



Photo 3: Continuous belt of screen planting along the southern and western boundaries of the site has been completed. (CM6)



Photo 4: Advance screen planting of noise barrier has been undertaken (CM6)