Room 723 & 725, 7/F, Block B, Profit Industrial Building,

: (852)-24508238 1-15 Kwai Fung Crescent, Kwai Fong, Fax : (852)-24508032 Hong Kong. Email : mcl@fugro.com



# 3<sup>rd</sup> CONSOLIDATED MONTHLY **EM&A REPORT**

January 2017

Client Civil Engineering and Development Department, HKSAR

EP No. EP-337/2009 -

New Distributor Roads Serving the Planned Kai Tak

Development Area

Contract No. KLN/2016/05 -

Independent Environmental Checker for

Contract No. KL/2015/02 Kai Tak Development -Stage 5A Infrastructure at Former North Apron Area

Report No. 0087/16/ED/0269

> Prepared by Wingo So

Reviewed by Calvin Leung

**Certified by** 

Colin Yung

Independent Environmental Checker MateriaLab Consultants Limited

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, : (852)-24508238 : (852)-24508032 Fax Hong Kong. Email : mcl@fugro.com



# **TABLE OF CONTENTS**

| EXE          | CUTIVE SU      | JMMARY                                                                                                                                                          | I       |  |  |
|--------------|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|--|--|
| 1.           | INTRODUCTION 1 |                                                                                                                                                                 |         |  |  |
| 2.           | ENVIRON        | MENTAL MONITORING AND AUDIT                                                                                                                                     | 8       |  |  |
| 3.           | SITE INSP      | PECTION                                                                                                                                                         | 11      |  |  |
| 4.           | ENVIRON        | MENTAL COMPLAINT AND NON-COMPLIANCE                                                                                                                             | 12      |  |  |
| 5.           | IMPLEME        | NTATION STATUS OF ENVIRONMENTAL MITIGATION MEASURE                                                                                                              | S 13    |  |  |
| 6.           | FUTURE         | KEY ISSUES                                                                                                                                                      | 14      |  |  |
| 7.           | CONCLUS        | BIONS                                                                                                                                                           | 18      |  |  |
| LIST         | OF APPEN       | DICES                                                                                                                                                           |         |  |  |
| Арре         | endix A        | Monthly EM&A Report For Contract No. KL/2012/02<br>Kai Tak Development - Stage 3A Infrastructure at North Apron Area                                            |         |  |  |
| Арре         | endix B        | Monthly EM&A Report For Contract No. KL/2012/03<br>Kai Tak Development - Stage 4 Infrastructure at North Apron Area                                             |         |  |  |
| Kai Tak Deve |                | Monthly EM&A Report For Contract No. KL/2014/01<br>Kai Tak Development - Stage 2 Infrastructure works for Developments at Southern<br>the Former Runway         | Part of |  |  |
| Арре         | endix D        | Monthly EM&A Report For Contract No. KL/2014/03<br>Kai Tak Development - Stage 3 Infrastructure Works for Developments at the Sout<br>Part of the Former Runway | hern    |  |  |
| Appendix E   |                | Monthly EM&A Report For Contract No. KL/2015/02<br>Kai Tak Development - Stage 5A Infrastructure at Former North Apron Area                                     |         |  |  |

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

: (852)-24508238 : (852)-24508032 1-15 Kwai Fung Crescent, Kwai Fong, Fax Hong Kong. Email : mcl@fugro.com



### **EXECUTIVE SUMMARY**

- i. This is the 3rd Consolidated Monthly EM&A Report which summaries the EM&A works undertaken by respective contract under EP-337/2009 within the period between 1 January and 31 January 2017.
- ii. The EP-337/2009 relevant major construction activities undertaken in the reporting month are summarized as follow:

### Contract No. KL/2010/03:

NA (The works has been completed and no further EM&A submission is required.)

### **Contract No. KL/2012/02:**

- · Site Clearance:
- RC works for VT1 at Portion G;
- Drainage works for connection to box culvert (KTOB);
- Hard landscaping works for Portion F1;
- Cross road duct at Choi Hung Road;
- Road and drainage works at Sze Mei Street and Luk Hop Street;
- Condition survey and monitoring survey;
- Earthwork at Portion E3;
- Footpath construction at Sam Chuk Street and Tsat Po Street; and
- ELS works for SW3 at San Po Kong.

### Contract No. KL/2012/03:

- Daily Cleaning;
- Installation of hand-railing & ladder inside Box Culvert B5;
- Construction of staircase and landing and E&M Works at PS2;
- Water test, backfill and sheet-pile removal in Heading 7A;
- Segment tunneling, backfill and sheet-pile removed chamber construction in Heading 7B;
- Outfall construction at Box Culvert B6;
- Road widening works (excavation and UU works) at Sung Wong Toi Road:
- Maintenance & Servicing Engineer's Office at Portion 9;
- Lay HDPE pipe at Pit 1 and 9;
- Pipe jacking at Pit 4;
- Chamber construction at Pit 5;
- Installation of drainage, UU laying works and Road works at Road D2;
- Finishing works and E&M works at NPS;
- UU works and Road works at Road L19 & Bailey St; and
- Storage of excavated material at Portion 6.

# Contract No. KL/2014/01:

- Watermain works:
- Construction of boundary wall at EPD recycling centre;
- Bored piles and Pre-bored socketed H-piles;
- TTA implementation at Shing Fung Road and Wang Chiu Road / Sheung Yee Road;
- Open excavation for box culvert, piles caps and underpass; and
- ELS installation for box culvert and underpass.

# Contract No. KL/2014/03:

Temporary utility diversion;

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

: (852)-24508238 1-15 Kwai Fung Crescent, Kwai Fong, : (852)-24508032 Fax Hong Kong. Email : mcl@fugro.com



- Implementation of Temporary Traffic Arragement (TTA);
- Construction of Tunnel structure:
- Construction of Subway B;
- · Construction of guide walls and D-walls; and
- Construction of District Cooling System Works.

# Contract No. KL/2015/02:

- Bored piling works at abutment A02;
- Demolition of existing concrete structure for construction of subway SW;
- Construction of box culvert b3: and
- Excavation for box culvert b3, b4 & b5

### **Breaches of the Action and Limit Levels**

- iii. No Action / Limit Level exceedance was recorded for 24-hr TSP monitoring in the reporting month.
- iv. No Action / Limit Level exceedance was recorded for 1-hr TSP monitoring in the reporting month.
- v. No Action / Limit Level exceedance was recorded for noise monitoring in the reporting month.

### Complaint, Notification of Summons and Successful Prosecution

vi. Contract No. KL/2014/03

A compliant received on 7th December 2016 was referred from EPD on 15th December 2016 regarding the sand and mud dropped from the vehicle that caused Cheung Yip Street and Shing Cheong dusty. The notification of complaint was received by ET on 27th January 2017. Detailed refer to the corresponding monthly EM&A report No complaint, notification of summons or prosecution was received in this reporting month.

### **Reporting Changes**

vii. There was no reporting change in the reporting month.

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong.

Building, Tel : (852)-24508238 g Crescent, Kwai Fong, Fax : (852)-24508032 Email : mcl@fugro.com



# **Future Key Issues**

viii. The potential environmental impacts for the coming month and the control measures are shown in **Table I**:

Table I Summary of Key Issues for the Coming Month and Control Measures

| Major Impact<br>Prediction             | Control Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |  |  |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|
| Contract No. KL/2                      | 012/02:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |  |  |
| Air quality impact (dust)              | <ul> <li>Frequent watering of haul road and unpaved/exposed areas;</li> <li>Frequent watering or covering stockpiles with tarpaulin or similar means; and</li> <li>Watering of any earth moving activities.</li> </ul>                                                                                                                                                                                                                                                                                                                |  |  |
| Water quality impact (surface run-off) | <ul> <li>Diversion of the collected effluent to de-silting facilities for treatment prior to discharge to public storm water drains;</li> <li>Provision of adequate de-silting facilities for treating surface run-off and other collected effluents prior to discharge;</li> <li>Provision of perimeter protection such as sealing of hoarding footings to avoid run-off from entering the existing storm water drainage system via public road; and</li> <li>Provision of measures to prevent discharge into the stream.</li> </ul> |  |  |
| Noise Impact                           | <ul> <li>Scheduling of noisy construction activities if necessary to avoid persistent noisy operation;</li> <li>Controlling the number of plants use on site;</li> <li>Regular maintenance of machines; and</li> <li>Use of acoustic barriers if necessary.</li> </ul>                                                                                                                                                                                                                                                                |  |  |
| Contract No. KL/2                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |  |  |
| Air quality impact (dust)              | <ul> <li>Frequent watering of haul road and unpaved/exposed areas;</li> <li>Frequent watering or covering stockpiles with tarpaulin or similar means; and</li> <li>Watering of any earth moving activities.</li> </ul>                                                                                                                                                                                                                                                                                                                |  |  |
| Water quality impact (surface run-off) | <ul> <li>Diversion of the collected effluent to de-silting facilities for treatment prior to discharge to public storm water drains;</li> <li>Provision of adequate de-silting facilities for treating surface run-off and other collected effluents prior to discharge;</li> <li>Provision of site boundary bund such as sealing of hoarding footings to avoid run-off from entering the existing storm water drainage system via public road; and</li> <li>Provision of measures to prevent discharge into the stream.</li> </ul>   |  |  |
| Noise Impact                           | <ul> <li>Scheduling of noisy construction activities if necessary to avoid persistent noisy operation;</li> <li>Controlling the number of plants use on site;</li> <li>Regular maintenance of machines; and</li> <li>Use of acoustic barriers if necessary.</li> </ul>                                                                                                                                                                                                                                                                |  |  |
| Contract No. KL/2                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |  |  |
| Air quality impact (dust)              | <ul> <li>Frequent watering of haul road and unpaved/exposed areas;</li> <li>Frequent watering or covering stockpiles with tarpaulin or similar means; and</li> <li>Watering of any earth moving activities.</li> </ul>                                                                                                                                                                                                                                                                                                                |  |  |
| Water quality impact (surface run-off) | <ul> <li>Diversion of the collected effluent to de-silting facilities for treatment prior to discharge to public storm water drains;</li> <li>Provision of adequate de-silting facilities for treating surface run-off and other collected effluents prior to discharge;</li> </ul>                                                                                                                                                                                                                                                   |  |  |

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong.

: (852)-24508238 : (852)-24508032 : mcl@fugro.com Tel Fax Email



| Major Impact                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |  |  |
|---------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|
| Prediction                                                                                              | Control Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |  |  |  |
|                                                                                                         | <ul> <li>Provision of perimeter protection such as sealing of hoarding footings to avoid run-off from entering the existing storm water drainage system via public road; and</li> <li>Provision of measures to prevent discharge into the stream.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |  |  |  |
| Noise Impact                                                                                            | <ul> <li>Scheduling of noisy construction activities if necessary to avoid persistent noisy operation;</li> <li>Controlling the number of plants use on site;</li> <li>Regular maintenance of machines; and</li> <li>Use of acoustic barriers if necessary.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |  |  |  |
| Contract No. KL/2                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |  |  |
| Construction dust, construction noise, water quality, waste management and landscape and visual impact. | <ul> <li>Sufficient watering of the works site with the active dust emitting activities;</li> <li>Limitation of the speed for vehicles on unpaved site roads;</li> <li>Properly cover or enclosure of the stockpiles and dusty materials;</li> <li>Good site practices on loading dusty materials;</li> <li>Providing sufficient vehicles washing facilities at every vehicle exit point;</li> <li>Good maintenance to the plant and equipment;</li> <li>Use of quieter plant and Quality Powered Mechanical Equipment (QPME);</li> <li>Use of acoustic fabric and noise barrier;</li> <li>Using the approved Non-road Mobile Machineries (NRMMs);</li> <li>Proper storage and handling of chemical;</li> <li>Appropriate desilting, oil interceptors or sedimentation devices provided on site for treatment before discharge;</li> <li>Onsite waste sorting and implementation of trip ticket system;</li> <li>Training of the site personnel in proper waste management and chemical waste handling procedures;</li> <li>Proper storage of the construction materials;</li> <li>Erection of decorative screen hoarding;</li> <li>Strictly following the Environmental Permits and Licenses;</li> <li>Provide sufficient mitigation measures as recommended in Approved EIA Reports</li> </ul> |  |  |  |
| Air quality impact (dust)                                                                               | <ul> <li>• Frequent watering of haul road and unpaved/exposed areas;</li> <li>• Frequent watering or covering stockpiles with tarpaulin or similar means; and</li> <li>• Watering of any earth moving activities.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |  |  |  |
| Water quality impact (surface run-off)                                                                  | <ul> <li>Diversion of the collected effluent to de-silting facilities for treatment prior to discharge to public storm water drains;</li> <li>Provision of adequate de-silting facilities for treating surface run-off and other collected effluents prior to discharge;</li> <li>Provision of perimeter protection such as sealing of hoarding footings to avoid run-off from entering the existing storm water drainage system via public road; and</li> <li>Provision of measures to prevent discharge into the stream.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |
| Noise Impact                                                                                            | <ul> <li>Scheduling of noisy construction activities if necessary to avoid persistent noisy operation;</li> <li>Controlling the number of plants use on site;</li> <li>Regular maintenance of machines; and</li> <li>Use of acoustic barriers if necessary.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |  |  |  |

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

: (852)-24508238 : (852)-24508032 1-15 Kwai Fung Crescent, Kwai Fong, Fax Hong Kong. Email : mcl@fugro.com



#### 1. INTRODUCTION

#### 1.1 **Background**

- The Kai Tak Development is located in the south-eastern part of Kowloon Peninsula of the HKSAR, comprising the apron and runway areas of the former Kai Tak Airport and existing waterfront areas at To Kwa Wan, Ma Tau Kok, Kowloon Bay, Kwun Tong and Cha Kwo Ling.
- 1.1.2 A study of environmental impact assessment (EIA) was undertaken to consider the key issues of air quality, noise, water quality, waste, land contamination, cultural heritage and landscape and visual impact, and identify possible mitigation measures associated with the works. EIA Report (Register No. AEIAR-130/2009) was approved by the Environmental Protection Department (EPD) on 4 March 2009.
- The EP-337/2009 was issued on 23 April 2009 for the new distributor roads serving the planned Kai Tak Development to the following scale and slope:
  - Road D1 a dual 2-lane carriageway of approximately 1.3 km long.
  - Road D2 a dual 3-lane carriageway of approximately 1.1 km long.
  - Road D3 a dual 2-lane carriageway of approximately 2.3 km long.
  - d) Road D4 a dual 2-lane carriageway of approximately 0.9 km long.
- The Civil Engineering and Development Department HKSAR has appointed MateriaLab Consultants Limited (MCL) to undertake the role of Independent Environmental Checker (IEC) for the Contract No. KL/2015/02.
- This is the 3<sup>rd</sup> Consolidated Monthly EM&A Report which summaries the EM&A works undertaken by respective contract under EP-337/2009 within the period between 1 January and 31 January 2017.

#### 1.2 **Summary of relevant Contract Information of Key Personnel**

| Party                     | Position                                        | Name               | Telephone | Fax       |  |  |
|---------------------------|-------------------------------------------------|--------------------|-----------|-----------|--|--|
| Contract No. KL/2012/0    | Contract No. KL/2012/02:                        |                    |           |           |  |  |
| Project Proponent CEDD)   | Engineer                                        | Mr. Mike Cho       | 3579 2450 | 2369 4980 |  |  |
| 1 Toject i Toponent OLDB) | Liigiiieei                                      | Mr. Kelvin Chow    | 3579 2453 | 2303 4300 |  |  |
| Engineer's                | SRE                                             | Mr. Gary Cheung    | 2210 6100 | 2210 6110 |  |  |
| Representative (ARUP)     | RE                                              | Ms. Edith Fung     | 2210 0100 | 2210 0110 |  |  |
| IEC (ANewR)               | IEC                                             | Mr. Adi Lee        | 2618 2836 | 3007 8648 |  |  |
|                           | ET Leader                                       | Dr. Priscilla Choy | 2151 2089 |           |  |  |
| ET (Cinotech)             | Project Coordinator<br>and Audit Team<br>Leader | Ms. Ivy Tam        | 2151 2090 | 3107 1388 |  |  |
| Main Contractor           | Project Manager                                 | Mr. Osbert Sit     |           |           |  |  |
| (Build King)              | EO                                              | Mr. Edmond Wong    | 2639 6290 | 2639 6208 |  |  |
| Contract No. KL/2012/0    | 3:                                              |                    |           |           |  |  |
| Project Proponent (CEDD)  | Senior Engineer                                 | Mr. C. K. Choi     | 2301 1174 | 2301 1277 |  |  |
| Engineer's                | SRE                                             | Mr. John Yam       | 2798 0771 | 3013 8864 |  |  |
| Representative (AECOM)    | RE                                              | Mr. Ivan Yim       | 2190 0111 | 3013 0004 |  |  |
| IEC (Hyder)               | IEC                                             | Mr. Wong Fu Nam    | 2911 2744 | 2805 5028 |  |  |
| ET (Cinotech)             | ET Leader                                       | Dr. Priscilla Choy | 2151 2089 | 3107 1388 |  |  |

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

Profit Industrial Building, Tel : (852)-24508238 1-15 Kwai Fung Crescent, Kwai Fong, Fax : (852)-24508032 Hong Kong. Email : mcl@fugro.com



| Party                                | Position                                        | Name                               | Telephone                  | Fax                  |
|--------------------------------------|-------------------------------------------------|------------------------------------|----------------------------|----------------------|
|                                      | Project Coordinator<br>and Audit Team<br>Leader | Ms. Ivy Tam                        | 2151 2090                  |                      |
| Main Contractor<br>(Kwan On)         | Site Agent                                      | Mr. Albert Ng                      | 3689 7752<br>6146 6761 (Ho | 3689 7726<br>otline) |
| Contract No. KL/2014/0               | )1:                                             |                                    |                            |                      |
| Project Proponent (CEDD)             | Senior Engineer<br>Engineer                     | Mr. Ronald Siu<br>Mr. Bernard Chan | 2301 1453<br>2301 1207     | 2301 1277            |
| Engineer's<br>Representative (AECOM) | CRE                                             | Mr. Clive Cheng                    | 3746 1801                  | 2798 0783            |
| IEC (KSMC)                           | IEC                                             | Dr. C. F. Ng                       | 2618 2166                  | 2120 7752            |
|                                      | ET Leader                                       | Dr. Priscilla Choy                 | 2151 2089                  |                      |
| ET (Cinotech)                        | Audit Team<br>Leader                            | Ms. Ivy Tam                        | 2151 2090                  | 3107 1388            |
| Main Contractor (CCJV)               | EO                                              | Mr. Dennis Ho                      | 2960 1398                  | 2960 1399            |
| Contract No. KL/2014/0               | )3 <u>:</u>                                     |                                    |                            |                      |
| Project Proponent (CEDD)             | Co-ordinator                                    | Ms. Amy Chu                        | 3106 3172                  | 2369 4980            |
| Engineer's<br>Representative (HMJV)  | CRE                                             | Mr. Chris Wong                     | 3742 3803                  | 3742 3899            |
| IEC (Ramboll Environ)                | IEC                                             | Mr. F. C. Tsang                    | 3465 2851                  | 3465 2899            |
| ET (MCL)                             | ET Leader                                       | Mr. Colin Yung                     | 3565 4114                  | 3565 4160            |
| Main Contractor (CRBC)               | Site Agent<br>EO                                | Mr. Arnold Chan<br>Mr. Andy Choy   | 9380 4110<br>6278 2693     | 2283 1689            |
| Contract No. KL/2015/0               | )2:                                             |                                    | •                          |                      |
| Project Proponent (CEDD)             | Senior Engineer                                 | Ms. K. Pong                        | 2301 1466                  | 2369 4980            |
| Engineer's<br>Representative (HMJV)  | SRE                                             | Mr. John Yam                       | 2798 0771                  | 2798 0783            |
| IEC (MCL)                            | IEC                                             | Mr. Colin Yung                     | 3565 4114                  | 2450 8032            |
|                                      | ET Leader                                       | Dr. Priscilla Choy                 | 2151 2089                  |                      |
| ET (Cinotech)                        | Audit Team<br>Leader                            | Ms. Ivy Tam                        | 2151 2090                  | 3107 1388            |
| Main Contractor (PWHJV)              | Site Agent                                      | Mr. W. M. Wong                     | 6386 3535                  | 2398 8301            |

# 1.3 Summary of Construction Programme and Activities

- 1.3.1 The construction programme of each Contract is summarized in the appendices of the corresponding Monthly EM&A.
- 1.3.2 The major construction activities undertaken in the reporting month are summarized as follow:

# **Contract No. KL/2010/03:**

NA (The works has been completed and no further EM&A submission is required.)

### Contract No. KL/2012/02:

- Site Clearance;
- RC works for VT1 at Portion G;
- Drainage works for connection to box culvert (KTOB);
- Hard landscaping works for Portion F1;

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

: (852)-24508238 : (852)-24508032 1-15 Kwai Fung Crescent, Kwai Fong, Fax Hong Kong. Email : mcl@fugro.com



- Cross road duct at Choi Hung Road;
- Road and drainage works at Sze Mei Street and Luk Hop Street;
- Condition survey and monitoring survey;
- Earthwork at Portion E3;
- · Footpath construction at Sam Chuk Street and Tsat Po Street; and
- ELS works for SW3 at San Po Kong.

### Contract No. KL/2012/03:

- Daily Cleaning;
- Installation of hand-railing & ladder inside Box Culvert B5;
- Construction of staircase and landing and E&M Works at PS2;
- Water test, backfill and sheet-pile removal in Heading 7A;
- Segment tunneling, backfill and sheet-pile removed chamber construction in Heading 7B;
- Outfall construction at Box Culvert B6;
- Road widening works (excavation and UU works) at Sung Wong Toi Road;
- Maintenance & Servicing Engineer's Office at Portion 9;
- Lay HDPE pipe at Pit 1 and 9;
- Pipe jacking at Pit 4:
- Chamber construction at Pit 5:
- Installation of drainage, UU laying works and Road works at Road D2;
- Finishing works and E&M works at NPS;
- UU works and Road works at Road L19 & Bailey St; and
- Storage of excavated material at Portion 6.

### **Contract No. KL/2014/01:**

- · Watermain works;
- Construction of boundary wall at EPD recycling centre;
- Bored piles and Pre-bored socketed H-piles;
- TTA implementation at Shing Fung Road and Wang Chiu Road / Sheung Yee Road;
- Open excavation for box culvert, piles caps and underpass; and
- ELS installation for box culvert and underpass.

### Contract No. KL/2014/03:

- Temporary utility diversion:
- Implementation of Temporary Traffic Arragement (TTA):
- Construction of Tunnel structure;
- Construction of Subway B;
- · Construction of guide walls and D-walls; and
- Construction of District Cooling System Works.

### Contract No. KL/2015/02:

- Bored piling works at abutment A02;
- Demolition of existing concrete structure for construction of subway SW;
- Construction of box culvert b3; and
- Excavation for box culvert b3, b4 & b5

#### 1.4 Summary of Inter-relationship with the environmental protection/ mitigation measures with the construction programme

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong,

: (852)-24508238 : (852)-24508032 Tel Fax Hong Kong. Email : mcl@fugro.com



1.4.1 The summary of inter-relationship with environmental protection/mitigation measures are presented as follow:

| Major Environmental Impact                                                                                                                                                                                                                                          | Control Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Contract No. KL/2012/02:                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Noise, dust impact, water quality and waste generation                                                                                                                                                                                                              | <ul> <li>Sufficient watering of the works site with active dust emitting activities;</li> <li>Properly cover the stockpiles;</li> <li>On-site waste sorting and implementation of trip ticket system</li> <li>Appropriate desilting/sedimentation devices provided on site for treatment before discharge;</li> <li>Use of quiet plant and well-maintained construction plant;</li> <li>Provide movable noise barrier;</li> <li>Well maintain the drainage system to prevent the spillage of wastewater during heavy rainfall;</li> <li>Provide sufficient mitigation measures as recommended in Approved EIA Report/Lease requirement.</li> </ul> |
| Contract No. KL/2012/03:                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Dust, Water Quality, Waste<br>Management<br>(Construction of superstructure of<br>Pumping Station PS2 and NPS;                                                                                                                                                      | <ul> <li>Sufficient watering of the works site with active dust emitting activities;</li> <li>Properly cover the stockpiles;</li> <li>Appropriate desilting/sedimentation devices provided on site for treatment before discharge;</li> <li>Well maintain the drainage system to prevent the spillage of wastewater during heavy rainfall; and</li> <li>On-site waste sorting and implementation of trip ticket system.</li> </ul>                                                                                                                                                                                                                 |
| Dust, Noise (Backfilling between sewerage manholes 1K1_1 and FMH10_340 and construction of manhole FMH10_370a at L6;)                                                                                                                                               | Use of quiet plant and well-maintained construction plant; and     Properly cover the stockpiles;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Noise, Waste Management (Installation of precast unit and construction of in-situ portions of Box Culvert B6; Construction of jacking pits nos. 1 and 2; Installation of gas pipe at pit no. 10; Construction of washout chamber at pit no. 11;)                    | <ul> <li>Use of quiet plant and well-maintained construction plant; and</li> <li>Provide hoarding.</li> <li>Good management and control on construction waste reduction</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Noise<br>(Construction of sewerage manhole<br>FMH 10 at Bailey Street; Widening<br>works of Sung Wong Toi Road.)                                                                                                                                                    | Use of quiet plant and well-maintained construction plant; and     Provide hoarding.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Noise, Water Quality (Pipe laying from manhole SMH2204 to Box Culvert B6; Laying of rising mains from PS2 to chainage CHA-18; Pipe laying from stormwater manholes SMH1962 to SMH1963 and construction of manholes SMH1953 and SMH1963 at L6; Installation of DCS;) | <ul> <li>Use of quiet plant and well-maintained construction plant; and</li> <li>Well maintain the drainage system to prevent the spillage of wastewater during heavy rainfall.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong. : (852)-24508238 : (852)-24508032 : mcl@fugro.com Tel Fax Email



| Major Environmental Impact                                                                                                      | Control Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Contract No. KL/2014/01:                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Noise, dust impact, water quality and waste generation                                                                          | <ul> <li>Sufficient watering of the works site with active dust emitting activities;</li> <li>Properly cover the stockpiles;</li> <li>On-site waste sorting and implementation of trip ticket system</li> <li>Appropriate desilting/sedimentation devices provided on site for treatment before discharge;</li> <li>Use of quiet plant and well-maintained construction plant;</li> <li>Well maintain the drainage system to prevent the spillage of wastewater during heavy rainfall;</li> <li>Provide mitigation measure to temporary use of chemicals;</li> <li>Provide sufficient mitigation measures as recommended in Approved EIA Report/Lease requirement.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Contract No. KL/2014/03:                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Air Quality Impact, Construction Noise Impact, Water Quality Impact, Chemical and Waste Management, Landscape and Visual Impact | <ul> <li>Sufficient watering of the works site with the active dust emitting activities;</li> <li>Limitation of the speed for vehicles on unpaved site roads;</li> <li>Properly cover or enclosure of the stockpiles and dusty materials;</li> <li>Good site practices on loading dusty materials;</li> <li>Providing sufficient vehicles washing facilities at every vehicle exit point;</li> <li>Good maintenance to the plant and equipment;</li> <li>Use of quieter plant and Quality Powered Mechanical Equipment (QPME);</li> <li>Use of acoustic fabric and noise barrier;</li> <li>Using the approved Non-road Mobile Machineries (NRMMs);</li> <li>Proper storage and handling of chemical;</li> <li>Appropriate desilting, oil interceptors or sedimentation devices provided on site for treatment before discharge;</li> <li>Onsite waste sorting and implementation of trip ticket system;</li> <li>Training of the site personnel in proper waste management and chemical waste handling procedures;</li> <li>Proper storage of the construction materials;</li> <li>Erection of decorative screen hoarding;</li> <li>Strictly following the Environmental Permits and Licenses;</li> <li>Provide sufficient mitigation measures as recommended in Approved EIA Reports</li> </ul> |
| Contract No. KL/2015/02:                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Noise, dust impact, water quality and waste generation                                                                          | <ul> <li>Sufficient watering of the works site with active dust emitting activities;</li> <li>Properly cover the stockpiles;</li> <li>On-site waste sorting and implementation of trip ticket system</li> <li>Appropriate desilting/sedimentation devices provided on site for treatment before discharge;</li> <li>Use of quiet plant and well-maintained construction plant;</li> <li>Provide movable noise barrier;</li> <li>Well maintain the drainage system to prevent the spillage of wastewater during heavy rainfall;</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong. : (852)-24508238 : (852)-24508032 : mcl@fugro.com Tel Fax Email



| Major Environmental Impact | Control Measures                                                                                   |
|----------------------------|----------------------------------------------------------------------------------------------------|
|                            | Provide sufficient mitigation measures as recommended in<br>Approved EIA Report/Lease requirement. |

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

: (852)-24508238 1-15 Kwai Fung Crescent, Kwai Fong, Fax : (852)-24508032 Hong Kong. Email : mcl@fugro.com



#### 1.5 Summary Status of Environmental Licences, Notifications and Permits

A summary of the relevant environmental licenses, permits and/or notifications on environmental protection for this EP and relevant Contract are presented in **Table 1.1**.

Table 1.1 Relevant Environmental Licenses, Permits and/or Notifications

| Environmental License / Permit /        | Reference Number  | Valid From | Valid Till |
|-----------------------------------------|-------------------|------------|------------|
| Notification                            | Tioloronoo Hambor | vana i iom | 74114 1111 |
| Contract No. KL/2012/02:                |                   |            |            |
| Environmental Permit                    | EP-337/2009       | 23/04/2009 | N/A        |
| Effluent Discharge License              | WT00016873-2013   | -          | 31/08/2018 |
| •                                       | WT00016723-2013   | -          | 31/08/2018 |
| Registration of Chemical Waste Producer | 5213-286-K3022-04 | -          | N/A        |
|                                         | GW-RE0646-16      | 14/09/2016 | 13/03/2017 |
|                                         | GW-RE0648-16      | 25/07/2016 | 24/01/2017 |
|                                         | GW-RE1041-16      | 27/10/2016 | 23/04/2017 |
| Construction Noise Permit               | GW-RE1054-16      | 28/10/2016 | 23/04/2017 |
|                                         | GW-RE1197-16      | 17/12/2016 | 12/03/2017 |
|                                         | GW-RE0069-17      | 27/01/2017 | 31/05/2017 |
|                                         | GW-RE0070-17      | 09/02/2017 | 31/05/2017 |
| O                                       | CW IEEG/GI/       | 00/02/2017 | 01/00/2017 |
| Contract No. KL/2012/03:                | FD 007/0000       | 00/04/0000 | N1/A       |
| Environmental Permit                    | EP-337/2009       | 23/04/2009 | N/A        |
| Efficient Disabours License             | EP-344/2009       | 23/04/2009 | N/A        |
| Effluent Discharge License              | WT00020971-2015   | 22/04/2015 | 21/04/2020 |
| Registration of Chemical Waste Producer | 5213-286-K2958-05 | -          | N/A        |
| Construction Noise Permit               | GW-RE0964-16      | 30/09/2016 | 29/03/2017 |
| Contract No. KL/2014/01:                |                   |            |            |
| Environmental Permit                    | EP-337/2009       | 23/04/2009 | N/A        |
|                                         | EP-445/2013/A     | 13/08/2009 | N/A        |
| Effluent Discharge License              | WT00023634-2016   | -          | 31/03/2021 |
| Registration of Chemical Waste Producer | 5213-247-C4004-01 | -          | N/A        |
| Construction Noise Permit               | GW-RE1092-16      | 09/11/2016 | 08/05/2017 |
| Constitution resident                   | GW-RE1251-16      | 10/01/2017 | 08/07/2017 |
| Contract No. KL/2014/03:                |                   |            |            |
|                                         | EP-337/2009       | 23/04/2009 | N/A        |
| Environmental Permit                    | EP-339/2009/A     | 18/06/2009 | N/A        |
|                                         | EP-451/2013       | 19/09/2013 | N/A        |
| Notification pursuant to Air Pollution  | 395601            | 16/11/2015 | N/A        |
| (Construction Dust) Regulation          |                   | 10/11/2013 | IN/A       |
| Billing Account for Waste Disposal      | A/C No.: 7023814  | 30/11/2015 | N/A        |
| Construction Noise Permit               | GW-RE1008-16      | 19/10/2016 | 09/04/2017 |
| Construction Noise Fermit               | PP-RE0032-16      | 23/11/2016 | 15/05/2017 |
| Wastewater Discharge License            | WT00023125-2015   | 06/01/2016 | 31/01/2021 |
| Chemical Waste Producer License         | 5213-247-C1232-12 | 23/11/2015 | N/A        |
| Contract No. KL/2015/02:                |                   |            |            |
| Environmental Permit                    | EP-337/2009       | 23/04/2009 | N/A        |
| Billing Account for Waste Disposal      | A/C No.: 7026164  | 20/10/2016 | N/A        |
|                                         | GW-RE0033-17      | 24/01/2017 | 05/07/2017 |
| Construction Noise Permit               | GW-RE1236-16      | 05/01/2017 | 29/06/2017 |
|                                         | GVV               | 00/01/2017 | 20/00/2017 |

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

: (852)-24508238 1-15 Kwai Fung Crescent, Kwai Fong, : (852)-24508032 Fax Hong Kong. Email : mcl@fugro.com



#### 2. **ENVIRONMENTAL MONITORING AND AUDIT**

#### **Results and Observations** 2.1

### Air Quality

- 2.1.1 The schedule of air quality monitoring in reporting month is provided in the appendices of the corresponding Monthly EM&A.
- 2.1.2 The weather conditions during the monitoring are provided in the appendices of the corresponding Monthly EM&A.
- 2.1.3 The monitoring data of 24-hr TSP and 1 hour TSP are summarized in Table 2.1. Detailed monitoring data are presented in the appendices of the corresponding Monthly EM&A.

Table 2.1 Summary of 24-hr and 1 hour TSP Monitoring Results

| Parameter     | Monitoring<br>Station    | Average<br>(μg/m³)   | Range<br>(μg/ m³)                       | Action Level (μg/ m³) | Limit Level<br>(μg/ m³) |  |
|---------------|--------------------------|----------------------|-----------------------------------------|-----------------------|-------------------------|--|
| Contract No.  | KL/2012/02:              |                      |                                         |                       |                         |  |
| 1-hr TSP      | AM1(B)                   | 204.5                | 177.2 - 224.3                           | 342                   | 500                     |  |
| 1-111 13F     | AM2                      | 175.8                | 89.7 - 232.2                            | 346                   | 300                     |  |
| 24-hr TSP     | AM1(B)                   | 75.5                 | 61.5 - 88.4                             | 159                   | 260                     |  |
| 24-111 135    | AM2                      | 80.4                 | 27.1 - 129.5                            | 157                   | 200                     |  |
| Contract No.  | KL/2012/03:              |                      |                                         |                       |                         |  |
| _             | AM2                      | 175.8                | 89.7 – 232.2                            | 346                   |                         |  |
| 1-hr TSP      | AM3(A)                   | 159.3                | 95.5 – 217.2                            | 351                   | F00                     |  |
| 1-111 15P     | AM4(B)                   | 181.0                | 149.2 – 210.2                           | 371                   | 500                     |  |
|               | AM5(A)                   | 165.3                | 78.7 – 209.9                            | 345                   |                         |  |
|               | AM2                      | 80.4                 | 27.1 – 129.5                            | 157                   |                         |  |
| 24-hr TSP     | AM3(A)                   | 70.5                 | 37.0 – 89.9                             | 167                   | 260                     |  |
|               | AM5(A)                   | 35.2                 | 18.4 – 47.9                             | 156                   |                         |  |
| Contract No.  | KL/2014/01:              |                      |                                         |                       |                         |  |
| NA (No air qu | ality monitoring is red  | quired for the Proje | ct)                                     |                       |                         |  |
| Contract No.  | KL/2014/03:              |                      |                                         |                       |                         |  |
|               | KTD1a                    | No compl             | aint of air avality                     | aa kaaaiiyad Th       | avafava                 |  |
| 1-hr TSP      | KTD2a                    |                      | aint of air quality<br>ct 1-hour TSP mo |                       |                         |  |
|               | KER1a                    | по шрас              | at 1-110ul 13F 1110                     | filloffing was cond   | ducted.                 |  |
|               | KTD1a                    | 99                   | 17-142                                  | 177                   |                         |  |
| 24-hr TSP     | KTD2a                    | 59                   | 25-94                                   | 157                   | 260                     |  |
|               | KER1a                    | 66                   | 36-95                                   | 172                   |                         |  |
| Contract No.  | Contract No. KL/2015/02: |                      |                                         |                       |                         |  |
| 1-hr TSP      | AM2                      | 196.9                | 173.0 – 232.2                           | 346                   | 500                     |  |
| 24-hr TSP     | AM2                      | 84.9                 | 68.7 – 93.6                             | 157                   | 260                     |  |

- No Action / Limit Level exceedance was recorded for 24-hr TSP monitoring in the reporting month.
- 2.1.5 No Action / Limit Level exceedance was recorded for 1-hr TSP monitoring in the reporting month.

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

: (852)-24508238 1-15 Kwai Fung Crescent, Kwai Fong, : (852)-24508032 Fax Hong Kong. Email : mcl@fugro.com



- The monitoring data of 24-hr TSP was compared with the EIA predictions are presented in the 2.1.6 appendices of the corresponding Monthly EM&A.
- The Event and Action Plan for air quality is given in in the appendices of the corresponding 2.1.7 Monthly EM&A.

### Noise

- The schedule of noise monitoring in reporting month is provided in in the appendices of the corresponding Monthly EM&A.
- 2.1.9 The noise monitoring data are summarized in Table 2.2. Detailed monitoring data are presented in the appendices of the corresponding Monthly EM&A.

Table 2.2 **Summary of Noise Impact Monitoring Results** 

| Monitoring<br>Stations   | Construction Noise Level<br>Leq <sub>(30min)</sub> dB(A)<br>(Range) | Action Level | Limit Level<br>dB (A) |
|--------------------------|---------------------------------------------------------------------|--------------|-----------------------|
| Contract No. KL/2012/02: |                                                                     |              |                       |
| M3                       | 52.5 – 78.3 <sup>#</sup>                                            |              | 70*                   |
| M4                       | 65.3 – 76.5 <sup>#</sup>                                            |              | 70*                   |
| M9                       | 58.6 - 62.7                                                         |              | 75                    |
| Contract No. KL/2012/03: |                                                                     |              |                       |
| M6(A)                    | 57.4 – 66.2                                                         |              | 70*                   |
| M7                       | 62.7 - 68.6                                                         |              | 70*                   |
| M8                       | 52.8 - 64.2                                                         |              | 70*                   |
| M9                       | 58.6 - 62.7                                                         | Mhan ana     | 75                    |
| Contract No. KL/2014/01: | When one documented complaint is received                           |              |                       |
| (No Construction noise m |                                                                     | NA           |                       |
| Contract No. KL/2014/03: |                                                                     |              |                       |
| KTD1a                    | 67 - 73                                                             |              | 75                    |
| KTD2a                    | 64 - 69                                                             |              | 75                    |
| KER1a                    | 65 - 73                                                             |              | 75                    |
| Contract No. KL/2015/02: |                                                                     |              |                       |
| M3                       | 52.5 – 78.3 <sup>#</sup>                                            |              | 70*                   |
| M4                       | 65.3 – 73.9 <sup>#</sup>                                            |              | 70*                   |
| M5(C)                    | 60.1 – 77.1                                                         |              | 75                    |

<sup>(\*)</sup> Noise Limit Level is 65 dB(A) during school examination periods.

- 2.1.10 The noise monitoring data was compared with the EIA predictions are presented in the appendices of the corresponding Monthly EM&A.
- 2.1.11 No Action / Limit Level exceedance was recorded for noise monitoring in the reporting month.
- 2.1.12 The Event and Action Plan for noise is given in in the appendices of the corresponding Monthly EM&A.

<sup>(\*)</sup> Measured noise level ≦ background / baseline noise level, detailed data refer to the corresponding Monthly EM&A report.

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

: (852)-24508238 1-15 Kwai Fung Crescent, Kwai Fong, Fax : (852)-24508032 Hong Kong. Email : mcl@fugro.com



# Landscape and Visual

2.1.13 Site audits were carried out on a weekly basis to monitor and audit the landscape and visual mitigation measures within the site boundaries of this Project. Detailed of observations are presented in the appendices of the corresponding Monthly EM&A.

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

: (852)-24508238 1-15 Kwai Fung Crescent, Kwai Fong, : (852)-24508032 Fax Hong Kong. Email : mcl@fugro.com



#### 3. SITE INSPECTION

#### 3.1 Site Inspection

Site inspections were carried out weekly to monitor the implementation of proper environmental pollution control and mitigation measures for the Project. The site inspection of each Contract are summarized as follow:

# Contract No. KL/2012/02:

Site audits were conducted on 4th, 11th, 18th and 24th January 2017 in the reporting month. IEC site inspection was conducted on 24th January 2017.

# Contract No. KL/2012/03:

Site audits were conducted on 6th, 13th, 18th and 26th January 2017 in the reporting month. IEC site inspection was conducted on 18th January 2017.

### Contract No. KL/2014/01:

Site audits were conducted by representatives of the Contractor, Supervising Officer and ET on 4, 11, 18, 25 January 2017 in the reporting month.

### Contract No. KL/2014/03:

In the reporting month, four site inspections were carried out on 5, 12 18 and 26 January 2017. Two of them, held on 5 and 18 January 2017 were the joint inspections with the IEC, ER, the Contractor and the ET.

### Contract No. KL/2015/02:

Site audits were conducted on 20 and 26 January 2017 in the reporting month.

3.1.2 Detailed of observation, recommendation of site inspections and summary of the mitigation measures implementation schedule is provided in the appendices of the corresponding Monthly EM&A.

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

: (852)-24508238 1-15 Kwai Fung Crescent, Kwai Fong, : (852)-24508032 Fax Hong Kong. Email : mcl@fugro.com



#### 4. **ENVIRONMENTAL COMPLAINT AND NON-COMPLIANCE**

#### **Complaints, Notification of Summons and Prosecution** 4.1

The summary of complaints, notification of summons and prosecution in the reporting month is shown as Table 4.1. Detailed records are presented in the appendices of the corresponding Monthly EM&A.

Table 4.1 Summary of Complaints Notification of Summons and Prosecution

| Event                                                | No. of Event This Month | Remark |
|------------------------------------------------------|-------------------------|--------|
| Contract No. KL/2012/02:                             |                         |        |
| Complaint received                                   | 0                       | NA     |
| Notifications of any summons & prosecutions received | 0                       | NA     |
| Contract No. KL/2012/03:                             |                         |        |
| Complaint received                                   | 0                       | NA     |
| Notifications of any summons & prosecutions received | 0                       | NA     |
| Contract No. KL/2014/01:                             |                         |        |
| Complaint received                                   | 0                       | NA     |
| Notifications of any summons & prosecutions received | 0                       | NA     |
| Contract No. KL/2014/03:                             |                         |        |
| Complaint received                                   | 1                       | NA     |
| Notifications of any summons & prosecutions received | 0                       | NA     |
| Contract No. KL/2015/02:                             |                         |        |
| Complaint received                                   | 0                       | NA     |
| Notifications of any summons & prosecutions received | 0                       | NA     |

### 4.1.2 Contract No. KL/2014/03

A compliant received on 7th December 2016 was referred from EPD on 15th December 2016 regarding the sand and mud dropped from the vehicle that caused Cheung Yip Street and Shing Cheong dusty. The notification of complaint was received by ET on 27th January 2017. Detailed refer to the corresponding monthly EM&A report

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

: (852)-24508238 1-15 Kwai Fung Crescent, Kwai Fong, Fax : (852)-24508032 Hong Kong. Email : mcl@fugro.com



#### 5. IMPLEMENTATION STATUS OF ENVIRONMENTAL MITIGATION MEASURES

#### 5.1 **Implementation Status**

5.1.1 The Contractor has implemented environmental mitigation measures and requirements as stated in the EIA Reports, the EP and the EM&A Manuals. The implementation status of the mitigation measures during the reporting month are presented in the appendices of the corresponding Monthly EM&A.

#### 5.2 **Waste Management**

5.2.1 The amount of wastes generated of this Project during the reporting month is shown in the appendices of the corresponding Monthly EM&A.

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

: (852)-24508238 : (852)-24508032 1-15 Kwai Fung Crescent, Kwai Fong, Fax Hong Kong. Email : mcl@fugro.com



#### 6. **FUTURE KEY ISSUES**

#### **Construction Programme for the Next Two Months** 6.1

6.1.1 The major site activities undertaken for the coming two months are summarized in follow:

### Contract No. KL/2012/02:

- Site Clearance for all possessed portion;
- Condition survey and monitoring survey;
- · Road and drainage works at Sze Mei Street;
- Painting and Roadwork at VT1;
- VE panel installation at SW2 and SW3;
- PERE Stage 1 works;
- · Earthwork at Portion E3:
- RC for SW2 and SW3;
- Drainage works for connection to box culvert adjacent to KTOB; and
- Road works at King Fuk Street

### Contract No. KL/2012/03:

- Daily Cleaning;
- Installation of hand-railing & ladder inside Box Culvert B5;
- Construction of staircase and landing and E&M Works at PS2:
- Water test, backfill and sheet-pile removal in Heading 7A;
- Segment tunneling, backfill and sheet-pile removed chamber construction in Heading 7B:
- Outfall construction at Box Culvert B6;
- Road widening works (excavation and UU works) at Sung Wong Toi Road;
- Maintenance & Servicing Engineer's Office at Portion 9;
- Lay HDPE pipe at Pit 1 and 9;
- Pipe jacking at Pit 4;
- · Chamber construction at Pit 5;
- Installation of drainage, UU laying works and Road works at Road D2;
- Finishing works and E&M works at NPS;
- UU works and Road works at Road L19 & Bailey St; and
- Storage of excavated material at Portion 6.

### Contract No. KL/2014/01:

- Watermain works;
- Construction of boundary wall at EPD recycling centre;
- · Bored piles and Pre-bored socketed H-piles;
- TTA implementation at Shing Fung Road and Wang Chiu Road/ Sheung Yee Road;
- Open excavation for box culvert, pile caps and underpass;
- ELS installation for box culvert and underpass; and
- Construction of noise barrier foundation

### Contract No. KL/2014/03:

- Temporary utility diversion;
- Implementation of Temporary Traffic Arragement (TTA);
- · Construction of Socket H piles;
- Construction of Tunnel structure;
- · Construction of guide walls and D-walls; and
- Construction of District Cooling System Works.

### Contract No. KL/2015/02:

Pre-drilling works at pile cap S15;

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

: (852)-24508238 1-15 Kwai Fung Crescent, Kwai Fong, Fax : (852)-24508032 Hong Kong. Email : mcl@fugro.com



- Construction of temp road for TTA at Prince Edward Road East;
- Construction of temp decking at the temp road;
- · Sheetpile driving works for SW6;
- Excavation for DCS along Road L7 and D1;
- · Hoarding erection along temp road;
- Construction of box culvert b3;
- · Excavation for box culvert b1, b4 & b5; and
- Sewerage works near SCL tunnel

#### 6.2 **Key Issues for the Coming Month**

The potential environmental impacts arising from the above construction activities and the 6.2.1 control measures are shown in **Table 6.1**:

Table 6.1 Summary of Key Issues for the Coming Month and Control Measures

| Major Impact                           | Control Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |  |  |  |  |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|
| Prediction                             | Control Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |  |  |  |  |
| Contract No. KL/2                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |  |  |  |  |
| Air quality impact (dust)              | <ul> <li>Frequent watering of haul road and unpaved/exposed areas;</li> <li>Frequent watering or covering stockpiles with tarpaulin or similar means; and</li> <li>Watering of any earth moving activities.</li> </ul>                                                                                                                                                                                                                                                                                                                |  |  |  |  |
| Water quality impact (surface run-off) | <ul> <li>Diversion of the collected effluent to de-silting facilities for treatment prior to discharge to public storm water drains;</li> <li>Provision of adequate de-silting facilities for treating surface run-off and other collected effluents prior to discharge;</li> <li>Provision of perimeter protection such as sealing of hoarding footings to avoid run-off from entering the existing storm water drainage system via public road; and</li> <li>Provision of measures to prevent discharge into the stream.</li> </ul> |  |  |  |  |
| Noise Impact                           | <ul> <li>Scheduling of noisy construction activities if necessary to avoid persistent noisy operation;</li> <li>Controlling the number of plants use on site;</li> <li>Regular maintenance of machines; and</li> <li>Use of acoustic barriers if necessary.</li> </ul>                                                                                                                                                                                                                                                                |  |  |  |  |
| Contract No. KL/2                      | <u>012/03:</u>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |  |  |  |  |
| Air quality impact (dust)              | <ul> <li>Frequent watering of haul road and unpaved/exposed areas;</li> <li>Frequent watering or covering stockpiles with tarpaulin or similar means; and</li> <li>Watering of any earth moving activities.</li> </ul>                                                                                                                                                                                                                                                                                                                |  |  |  |  |
| Water quality impact (surface run-off) | <ul> <li>Diversion of the collected effluent to de-silting facilities for treatment prior to discharge to public storm water drains;</li> <li>Provision of adequate de-silting facilities for treating surface run-off and other collected effluents prior to discharge;</li> <li>Provision of site boundary bund such as sealing of hoarding footings to avoid run-off from entering the existing storm water drainage system via public road; and</li> <li>Provision of measures to prevent discharge into the stream.</li> </ul>   |  |  |  |  |
| Noise Impact                           | <ul> <li>Scheduling of noisy construction activities if necessary to avoid persistent noisy operation;</li> <li>Controlling the number of plants use on site;</li> <li>Regular maintenance of machines; and</li> <li>Use of acoustic barriers if necessary.</li> </ul>                                                                                                                                                                                                                                                                |  |  |  |  |
| Contract No. KL/2                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |  |  |  |  |
| Air quality                            | Frequent watering of haul road and unpaved/exposed areas;                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |  |  |  |  |

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong.

: (852)-24508238 : (852)-24508032 : mcl@fugro.com Tel Fax Email



| Majar Impact                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |  |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|
| Major Impact<br>Prediction                                                                                                                                              | Control Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |  |  |  |
| impact (dust)                                                                                                                                                           | <ul> <li>Frequent watering or covering stockpiles with tarpaulin or similar means; and</li> <li>Watering of any earth moving activities.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |  |  |  |
| Water quality impact (surface run-off)                                                                                                                                  | <ul> <li>Diversion of the collected effluent to de-silting facilities for treatment prior to discharge to public storm water drains;</li> <li>Provision of adequate de-silting facilities for treating surface run-off and other collected effluents prior to discharge;</li> <li>Provision of perimeter protection such as sealing of hoarding footings to avoid run-off from entering the existing storm water drainage system via public road; and</li> <li>Provision of measures to prevent discharge into the stream.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |
| Noise Impact                                                                                                                                                            | <ul> <li>Scheduling of noisy construction activities if necessary to avoid persistent noisy operation;</li> <li>Controlling the number of plants use on site;</li> <li>Regular maintenance of machines; and</li> <li>Use of acoustic barriers if necessary.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |  |  |  |
| Contract No. KL/20                                                                                                                                                      | 014/03:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |  |  |  |
| Construction dust, construction noise, water quality, waste management and landscape and visual impact.                                                                 | <ul> <li>Sufficient watering of the works site with the active dust emitting activities;</li> <li>Limitation of the speed for vehicles on unpaved site roads;</li> <li>Properly cover or enclosure of the stockpiles and dusty materials;</li> <li>Good site practices on loading dusty materials;</li> <li>Providing sufficient vehicles washing facilities at every vehicle exit point;</li> <li>Good maintenance to the plant and equipment;</li> <li>Use of quieter plant and Quality Powered Mechanical Equipment (QPME);</li> <li>Use of acoustic fabric and noise barrier;</li> <li>Using the approved Non-road Mobile Machineries (NRMMs);</li> <li>Proper storage and handling of chemical;</li> <li>Appropriate desilting, oil interceptors or sedimentation devices provided on site for treatment before discharge;</li> <li>Onsite waste sorting and implementation of trip ticket system;</li> <li>Training of the site personnel in proper waste management and chemical waste handling procedures;</li> <li>Proper storage of the construction materials;</li> <li>Erection of decorative screen hoarding;</li> <li>Strictly following the Environmental Permits and Licenses;</li> <li>Provide sufficient mitigation measures as recommended in Approved EIA Reports</li> </ul> |  |  |  |
| Contract No. KL/20                                                                                                                                                      | 015/02:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |  |  |  |
| Air quality impact (dust)                                                                                                                                               | <ul> <li>Frequent watering of haul road and unpaved/exposed areas;</li> <li>Frequent watering or covering stockpiles with tarpaulin or similar means; and</li> <li>Watering of any earth moving activities.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |  |  |  |
| Water quality impact (surface run-off)                                                                                                                                  | <ul> <li>Diversion of the collected effluent to de-silting facilities for treatment prior to discharge to public storm water drains;</li> <li>Provision of adequate de-silting facilities for treating surface run-off and other collected effluents prior to discharge;</li> <li>Provision of perimeter protection such as sealing of hoarding footings to avoid run-off from entering the existing storm water drainage system via public road; and</li> <li>Provision of measures to prevent discharge into the stream.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |
| <ul> <li>Scheduling of noisy construction activities if necessary to avoid persister noisy operation;</li> <li>Controlling the number of plants use on site;</li> </ul> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |  |  |

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

: (852)-24508238 1-15 Kwai Fung Crescent, Kwai Fong, Fax : (852)-24508032 Hong Kong. Email : mcl@fugro.com



| Major Impact<br>Prediction | Control Measures                                                                                      |
|----------------------------|-------------------------------------------------------------------------------------------------------|
|                            | <ul><li>Regular maintenance of machines; and</li><li>Use of acoustic barriers if necessary.</li></ul> |

#### **Monitoring Schedules for the Next Three Months** 6.3

The tentative schedules for environmental monitoring in the coming three months are provided 6.3.1 in in the appendices of the corresponding Monthly EM&A.

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

: (852)-24508238 1-15 Kwai Fung Crescent, Kwai Fong, : (852)-24508032 Fax Hong Kong. Email : mcl@fugro.com



#### 7. **CONCLUSIONS**

- No Action / Limit Level exceedance was recorded for 24-hr TSP monitoring in the reporting month.
- 7.1.2 No Action / Limit Level exceedance was recorded for 1-hr TSP monitoring in the reporting
- 7.1.3 No Action / Limit Level exceedance was recorded for noise monitoring in the reporting month.

### 7.1.4 Contract No. KL/2014/03

A compliant received on 7th December 2016 was referred from EPD on 15th December 2016 regarding the sand and mud dropped from the vehicle that caused Cheung Yip Street and Shing Cheong dusty. The notification of complaint was received by ET on 27th January 2017. Detailed refer to the corresponding monthly EM&A report No complaint, notification of summons or prosecution was received in this reporting month.

The potential environmental impacts arising from the coming two months of major construction 7.1.5 activities and the control measures are shown in Table 6.1

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, : (852)-24508238 : (852)-24508032 Fax Hong Kong. Email : mcl@fugro.com



# Appendix A

**Monthly EM&A Report** For Contract No. KL/2012/02 Kai Tak Development - Stage 3A Infrastructure at North Apron Area

# Civil Engineering and Development Department

# EP-337/2009 – New Distributor Roads Serving the Planned KTD

# Contract No. KL/2012/02 Kai Tak Development –Stage 3A Infrastructure at Former North Apron Area

Monthly EM&A Report

January 2017

(version 1.0)

Approved By

(Environmental Team Leader)

### REMARKS:

The information supplied and contained within this report is, to the best of our knowledge, correct at the time of printing.

CINOTECH accepts no responsibility for changes made to this report by third parties

# CINOTECH CONSULTANTS LTD

Room 1710, Technology Park, 18 On Lai Street, Shatin, NT, Hong Kong Tel: (852) 2151 2083 Fax: (852) 3107 1388

Email: info@cinotech.com.hk



Ove Arup & Partners Hong Kong Limited

Your reference:

L5 Festival Walk 80 Tat Chee Avenue

Our reference:

HKCEDD04/50/104102

Kowloon Tong

Hong Kong

Date:

15 February 2017

Attention: Mr Gary Cheung / Mr Chris Lee

BY POST

Dear Sirs

Contract No.: KLN/2013/01

Independent Environmental Checker for "Contract No. KL/2012/02

Kai Tak Development - Stage 3A Infrastructure at Former North Apron Area"

Verification of Monthly EM&A Report for January 2017

We refer to emails of 10 and 14 February 2017 attaching a Monthly EM&A Report for January 2017 prepared by the ET.

We have no comment and hereby verify the Report in accordance with Clause 3.3 of the Environmental Permit no. EP-337/2009.

Please do not hesitate to contact the undersigned or our Mr Adi Lee on 2618 2836 should you have any queries.

Yours faithfully ANEWR CONSULTING LIMITED

Independent Environmental Checker

CPSJ/LYMA/FCCA/csym

# TABLE OF CONTENTS

|    | EXECUTIVE SUMMARY                                                         | 1  |
|----|---------------------------------------------------------------------------|----|
|    | Introduction                                                              |    |
|    | Environmental Monitoring Works                                            | 2  |
|    | Environmental Licenses and Permits                                        | 2  |
|    | Key Information in the Reporting Month                                    | 3  |
|    | Future Key Issues                                                         | 3  |
| 1. | INTRODUCTION                                                              | 4  |
|    | Background                                                                | 1  |
|    | Project Organizations                                                     |    |
|    | Construction Activities undertaken during the Reporting Month             |    |
|    | Summary of EM&A Requirements                                              |    |
|    | •                                                                         |    |
| 2. | AIR QUALITY                                                               | 7  |
|    | Monitoring Requirements                                                   | 7  |
|    | Monitoring Locations                                                      | 7  |
|    | Monitoring Equipment                                                      | 7  |
|    | Monitoring Parameters, Frequency and Duration                             | 7  |
|    | Monitoring Methodology and QA/QC Procedure                                |    |
|    | Results and Observations                                                  | 10 |
| 3. | NOISE                                                                     | 12 |
|    | Monitoring Requirements                                                   | 12 |
|    | Monitoring Locations                                                      |    |
|    | Monitoring Equipment                                                      |    |
|    | Monitoring Parameters, Frequency and Duration                             |    |
|    | Monitoring Methodology and QA/QC Procedures                               |    |
|    | Maintenance and Calibration                                               |    |
|    | Results and Observations.                                                 |    |
| 4. | COMPARISON OF EM&A RESULTS WITH EIA PREDICTIONS                           | 16 |
| _  |                                                                           |    |
| 5. | LANDSCAPE AND VISUAL                                                      |    |
|    | Monitoring Requirements                                                   | 18 |
|    | Results and Observations                                                  | 18 |
| 6. | ENVIRONMENTAL AUDIT                                                       | 19 |
|    | Site Audits                                                               | 19 |
|    | Review of Environmental Monitoring Procedures                             |    |
|    | Status of Environmental Licensing and Permitting                          |    |
|    | Status of Waste Management                                                |    |
|    | Implementation Status of Environmental Mitigation Measures                |    |
|    | Summary of Mitigation Measures Implemented                                |    |
|    | Implementation Status of Event Action Plans                               |    |
|    | Summary of Complaint, Warning, Notification of any Summons and Successful |    |
|    | Prosecution                                                               | 23 |
| 7. | FUTURE KEY ISSUES                                                         | 24 |
| -  | Key Issues for the Coming Month                                           |    |
|    | Monitoring Schedule for the Next Month                                    |    |
|    | TITOTITE DELICATION TO THE TOAT MOUNT                                     | 20 |

| 8. | CONCLUSIONS AND RECOMMENDATIONS | 26 |
|----|---------------------------------|----|
|    | Conclusions                     | 26 |
|    | Recommendations                 |    |

# LIST OF TABLES

| Table I   | Air Quality and Noise Monitoring Stations for this Project                 |
|-----------|----------------------------------------------------------------------------|
| Table II  | Non-compliance Recorded for the Project in the Reporting Month             |
| Table III | Summary Table for Key Information in the Reporting Month                   |
| Table 1.1 | Key Project Contacts                                                       |
| Table 1.2 | Construction Programme Showing the Inter-Relationship with Environmental   |
|           | Protection/Mitigation Measures                                             |
| Table 2.1 | Locations for Air Quality Monitoring                                       |
| Table 2.2 | Air Quality Monitoring Equipment                                           |
| Table 2.3 | Impact Dust Monitoring Parameters, Frequency and Duration                  |
| Table 2.4 | Summary Table of Air Quality Monitoring Results during the reporting month |
| Table 3.1 | Noise Monitoring Stations                                                  |
| Table 3.2 | Noise Monitoring Equipment                                                 |
| Table 3.3 | Noise Monitoring Parameters, Frequency and Duration                        |
| Table 3.4 | Baseline Noise Level and Noise Limit Level for Monitoring Stations         |
| Table 3.5 | Summary Table of Noise Monitoring Results during the Reporting Month       |
| Table 4.1 | Comparison of 1-hr TSP data with EIA predictions                           |
| Table 4.2 | Comparison of 24-hr TSP data with EIA predictions                          |
| Table 4.3 | Comparison of Noise Monitoring Data with EIA predictions                   |
| Table 6.1 | Summary of Environmental Licensing and Permit Status                       |
| Table 6.2 | Observations and Recommendations of Site Inspections                       |
|           |                                                                            |

# LIST OF FIGURES

| Figure 1 | Site Layout Plan                                                |
|----------|-----------------------------------------------------------------|
| Figure 2 | Air Quality Monitoring Stations under Contract No.: KLN/2013/16 |
| Figure 3 | Noise Monitoring Stations under Contract No.: KLN/2013/16       |
| Figure 4 | Locations of Wind Data Monitoring Equipment                     |

# LIST OF APPENDICES

| PENDICES                                                                                         |
|--------------------------------------------------------------------------------------------------|
| Action and Limit Levels for Air Quality and Noise                                                |
| Copies of Calibration Certificates                                                               |
| Weather Information                                                                              |
| Environmental Monitoring Schedules                                                               |
| 1-hour TSP Monitoring Results and Graphical Presentations                                        |
| 24-hour TSP Monitoring Results and Graphical Presentations                                       |
| Noise Monitoring Results and Graphical Presentations                                             |
| Summary of Exceedance                                                                            |
| Site Audit Summary                                                                               |
| Event Action Plans                                                                               |
| Environmental Mitigation Implementation Schedule (EMIS)                                          |
| Summaries of Environmental Complaint, Warning, Summon and Notification of Successful Prosecution |
| Summary of Waste Generation and Disposal Records                                                 |
|                                                                                                  |

### **EXECUTIVE SUMMARY**

### Introduction

- 1. This is the 40<sup>th</sup> Monthly Environmental Monitoring and Audit Report prepared by Cinotech Consultants Ltd. for "Contract No. KL/2012/02 Kai Tak Development Stage 3A Infrastructure at Former North Apron Area" (Hereafter referred to as "the Project"). This contract comprises one Schedule 2 designated project (DP), namely the new distributor road D1 serving the planned KTD. The DP is part of the designated project under Environmental Permit (EP) No.: EP-337/2009 ("New distributor roads serving the planned Kai Tak Development") respectively. This report documents the findings of EM&A Works conducted from 1 31 January 2017.
- 2. With reference to the same principle of EIA report of the Project, air quality monitoring stations within 500m and noise monitoring stations within 300m from the boundary of this Project are considered as relevant monitoring locations. In such regard, the relevant air quality and noise monitoring locations are tabulated in Table I (see Figure 2 and 3 for their locations).

Table I – Air Quality and Noise Monitoring Stations for this Project

| Locations                         | Monitoring Stations In<br>accordance with EM&A<br>Manual | Alternative Monitoring Stations                 |  |  |
|-----------------------------------|----------------------------------------------------------|-------------------------------------------------|--|--|
| Air Quality Monitoring Stations   |                                                          |                                                 |  |  |
| AM1 - Rhythm Garden               | No                                                       | AM1(B) - Contractor Site Office<br>(KL/2012/02) |  |  |
| AM2 - Lee Kau Yan Memorial School | Yes                                                      | N/A                                             |  |  |
| AM6 – Site 1B4 (Planned)          | N/A                                                      |                                                 |  |  |
| Noise Monitoring Stations         |                                                          |                                                 |  |  |
| M3 - Cognitio College             | Yes                                                      | N/A                                             |  |  |
| M4 - Lee Kau Yan Memorial School  | Yes                                                      | N/A                                             |  |  |
| M9 – Tak Long Estate              | Yes N/A                                                  |                                                 |  |  |
| M10 – Site 1B4 (Planned)          |                                                          | N/A                                             |  |  |

3. According to the Environmental Monitoring and Audit Manual (EM&A Manual) of the Kai Tak Development (KTD) Schedule 3 Environmental Impact Assessment (EIA) Report, the impact monitoring at the designated monitoring stations as required in KTD EM&A Manual under the EP, have been conducted in Contract No. KLN/2013/16 – Environmental Monitoring Works for Kai Tak Development under Schedule 3 of KTD, which is on-going starting from December 2010. The impact monitoring data under Contract No. KLN/2013/16 will be adopted for the Project. Therefore, this report presents the air quality and noise monitoring works extracted from Contract No. KLN/2013/16.

- Monthly EM&A Report January 2017
- 4. The major site activities undertaken in the reporting month included:
  - Site Clearance:
  - RC works for VT1 at Portion G;
  - Drainage works for connection to box culvert (KTOB);
  - Hard landscaping works for Portion F1;
  - Cross road duct at Choi Hung Road;
  - Road and drainage works at Sze Mei Street and Luk Hop Street;
  - Condition survey and monitoring survey;
  - Earthwork at Portion E3;
  - Footpath construction at Sam Chuk Street and Tsat Po Street; and
  - ELS works for SW3 at San Po Kong.

# **Environmental Monitoring Works**

- 5. Environmental monitoring for the Project was performed in accordance with the EM&A Manual and the monitoring results were checked and reviewed. Site Inspections/Audits were conducted once per week. The implementation of the environmental mitigation measures, Event Action Plans and environmental complaint handling procedures were also checked.
- 6. Summary of the non-compliance in the reporting month for the Project is tabulated in Table II.

Table II Non-compliance Recorded for the Project in the Reporting Month

| Two I I to I comprise to I control of the I copy of the I |                     |              |              |  |  |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|--------------|--------------|--|--|--|
| Parameter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | No. of Project-rela | Action Taken |              |  |  |  |
| 1 al allietei                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Action Level        | Limit Level  | Action Taken |  |  |  |
| 1-hr TSP                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 0                   | 0            | N/A          |  |  |  |
| 24-hr TSP                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 0                   | 0            | N/A          |  |  |  |
| Noise                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 0                   | 0            | N/A          |  |  |  |

1-hour & 24-hour TSP Monitoring

7. All 1-hour & 24-hour TSP monitoring was conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded.

Construction Noise Monitoring

8. All construction noise monitoring was conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded.

### **Environmental Licenses and Permits**

- 9. Licenses/Permits granted to the Project include the Environmental Permit (EP) for the Project, EP-337/2009 issued on 23 April 2009.
- 10. Registration of Chemical Waste Producer (License: 5213-286-K3022-04).
- 11. Water Discharge License (License No.: WT00016873-2013 and WT00016723-2013).
- 12. Construction Noise Permit (License No.: GW-RE0646-16, GW-RE0648-16, GW-RE1041-16, GW-RE1054-16, GW-RE1197-16, GW-RE0069-17 & GW-RE0070-17).

# **Key Information in the Reporting Month**

13. Summary of key information in the reporting month is tabulated in Table III.

Table III Summary Table for Key Information in the Reporting Month

| Event                                                | Event Details |        | Action Taken | Status | Remark |
|------------------------------------------------------|---------------|--------|--------------|--------|--------|
|                                                      | Number        | Nature | Action Taken | Status | Kemark |
| Complaint received                                   | 0             |        | N/A          | N/A    |        |
| Reporting<br>Changes                                 | 0             |        | N/A          | N/A    |        |
| Notifications of any summons & prosecutions received | 0             |        | N/A          | N/A    |        |

# **Future Key Issues**

- 14. The future key environmental issues in the coming month include:
  - Dust generation from stockpiles of dusty materials, exposed site area, excavation works and rock breaking activities;
  - Water spraying for dust generating activity and on haul road;
  - Proper storage of construction materials on site;
  - Storage of chemicals/fuel and chemical waste/waste oil on site;
  - Accumulation of general and construction waste on site;
  - Noise from operation of the equipment, especially for rock-breaking activities, piling works and machinery on-site;
  - Wastewater and runoff discharge from site;
  - Regular removal of silt, mud and sand along u-channels and sedimentation tanks; and
  - Review and implementation of temporary drainage system for the surface runoff.

# 1. INTRODUCTION

### **Background**

- 1.1 The Kai Tak Development (KTD) is located in the south-eastern part of Kowloon Peninsula, comprising the apron and runway areas of the former Kai Tak Airport and existing waterfront areas at To Kwa Wan, Ma Tau Kok, Kowloon Bay, Kwun Tong and Cha Kwo Ling. It covers a land area of about 328 hectares. Stage 3A Infrastructure at Former North Apron Area is one of the construction stages of KTD. It contains one Schedule 2 DP including new distributor roads serving the planned KTD. The general layout of the Project is shown in **Figure 1.**
- 1.2 One Environmental Permit (EP) No. EP-337/2009 was also issued on 23 April 2009 for new distributor roads serving the planned KTD to Civil Engineering and Development Department as the Permit Holder.
- 1.3 A study of environmental impact assessment (EIA) was undertaken to consider the key issues of air quality, noise, water quality, waste, land contamination, cultural heritage and landscape and visual impact, and identify possible mitigation measures associated with the works. An EIA Report (Register No. AEIAR-130/2009) was approved by the Environmental Protection Department (EPD) on 4 April 2009.
- 1.4 Cinotech Consultants Limited (Cinotech) was commissioned by Build King Construction Ltd. (the Contractor) to undertake the role of the Environmental Team (ET) for the Contract No. KL/2012/02 Stage 3A Infrastructure at Former North Apron Area. The construction work under KL/2012/02 comprises the construction of part of the Road D1 under the EP (EP-337/2009).
- 1.5 Cinotech Consultants Limited was commissioned by Build King Construction Ltd. To undertake the Environmental Monitoring and Audit (EM&A) works for the Project. The construction commencement of this Contract was on 24<sup>th</sup> October 2013 for Road D1. This is the 40<sup>th</sup> Monthly EM&A report summarizing the EM&A works for the Project from 1 31 January 2017.

# **Project Organizations**

- 1.6 Different parties with different levels of involvement in the project organization include:
  - Project Proponent Civil Engineering and Development Department (CEDD).
  - The Engineer and the Engineer's Representative (ER) Ove Arup & Partners (ARUP).
  - Environmental Team (ET) Cinotech Consultants Limited (CCL).
  - Independent Environmental Checker (IEC) ANewR Consulting Limited (ANewR).
  - Contractor Build King Construction Ltd. (Build King).

1.7 The key contacts of the Project are shown in **Table 1.1**.

Table 1.1 Key Project Contacts

| Party                                   | Role                      | <b>Contact Person</b>          | Position                                        | Phone No.                | Fax No.   |
|-----------------------------------------|---------------------------|--------------------------------|-------------------------------------------------|--------------------------|-----------|
| CEDD                                    | CEDD Project<br>Proponent |                                | Engineer                                        | 3579 2450 /<br>3579 2453 | 2369 4980 |
| ARUP                                    | Engineer's Representative | Mr. Gary Cheung Ms. Edith Fung | SRE<br>RE                                       | 2210 6100                | 2210 6110 |
|                                         | Environmental<br>Team     | Dr. Priscilla Choy             | Environmental<br>Team Leader                    | 2151 2089                | 3107 1388 |
| Cinotech                                |                           | Ms. Ivy Tam                    | Project Coordinator<br>and Audit Team<br>Leader | 2151 2090                |           |
| ANewR Independent Environmental Checker |                           | Mr. Adi Lee                    | Independent<br>Environmental<br>Checker         | 2618 2836                | 3007 8648 |
|                                         |                           | Mr. Osbert Sit                 | Project Manager                                 |                          |           |
| Build King                              | Contractor                | Mr. Edmond Wong                | Environmental<br>Officer                        | 2639 6290                | 2639 6208 |

# Construction Activities undertaken during the Reporting Month

- 1.8 The site activities undertaken in the reporting month included:
  - Site Clearance;
  - RC works for VT1 at Portion G;
  - Drainage works for connection to box culvert (KTOB);
  - Hard landscaping works for Portion F1;
  - Cross road duct at Choi Hung Road;
  - Road and drainage works at Sze Mei Street and Luk Hop Street;
  - Condition survey and monitoring survey;
  - Earthwork at Portion E3;
  - Footpath construction at Sam Chuk Street and Tsat Po Street; and
  - ELS works for SW3 at San Po Kong.
- 1.9 The construction programme showing the inter-relationship with environmental protection/mitigation measures are presented in Table 1.2.

Table 1.2 Construction Programme Showing the Inter-Relationship with Environmental Protection/Mitigation Measures

| Construction<br>Works       | Major Environmental<br>Impact                          | Control Measures                                                                                                                                                                                                                                                                                                                  |
|-----------------------------|--------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| As mentioned in Section 1.8 | Noise, dust impact, water quality and waste generation | Sufficient watering of the works site with active dust emitting activities; Properly cover the stockpiles; On-site waste sorting and implementation of trip ticket system Appropriate desilting/sedimentation devices provided on site for treatment before discharge; Use of quiet plant and well-maintained construction plant; |

5

| Provide movable noise barrier;            |
|-------------------------------------------|
| Well maintain the drainage system to      |
| prevent the spillage of wastewater during |
| heavy rainfall;                           |
| Provide sufficient mitigation measures as |
| recommended in Approved EIA               |
| Report/Lease requirement.                 |

# **Summary of EM&A Requirements**

- 1.10 The EM&A programme requires construction noise monitoring, air quality monitoring, landscape and visual monitoring and environmental site audit. The EM&A requirements for each parameter are described in the following sections, including:
  - All monitoring parameters;
  - Action and Limit levels for all environmental parameters;
  - Event Action Plans;
  - Environmental requirements and mitigation measures, as recommended in the EM&A Manual under the EP.
- 1.11 The advice on the implementation status of environmental protection and pollution control/mitigation measures is summarized in Section 6 of this report.
- 1.12 This report presents the monitoring results, observations, locations, equipment, period, methodology and QA/QC procedures of the required monitoring parameters, namely air quality and noise levels and audit works for the Project from 1-31 January 2017.

Monthly EM&A Report – January 2017

#### 2. AIR QUALITY

#### **Monitoring Requirements**

2.1 According to EM&A Manual under the EP, 1-hour and 24-hour TSP monitoring were conducted to monitor the air quality for this Project. For regular impact monitoring, a sampling frequency of at least once in every six days at all of the monitoring stations for 24-hour TSP monitoring. For 1-hour TSP monitoring, the sampling frequency of at least three times in every six days shall be undertaken when the highest dust impact occurs. **Appendix** A shows the established Action/Limit Levels for the environmental monitoring works.

#### **Monitoring Locations**

2.2 Three designated monitoring stations were selected for air quality monitoring programme. Impact dust monitoring was conducted at two air quality monitoring stations, AM1(B) - Contractor Site Office (KL/2012/02) AM1(B), AM2 - Lee Kau Yan Memorial School in the reporting month. Table 2.1 describes the air quality monitoring locations, which are also depicted in **Figure 2**.

**Table 2.1** Locations for Air Quality Monitoring

| Monitoring Stations Locations   |                                     | <b>Location of Measurement</b> |  |
|---------------------------------|-------------------------------------|--------------------------------|--|
| AM1(B)                          | Contractor Site Office (KL/2012/02) | Ground Floor Area              |  |
| AM2 Lee Kau Yan Memorial School |                                     | Rooftop (about 8/F) Area       |  |
| #AM6 PA 15                      |                                     | Site 1B4 (Planned)             |  |

Remarks: # The impact monitoring at these locations will only be carried out until existence of the sensitive receiver at the building.

#### **Monitoring Equipment**

2.3 Table 2.2 summarizes the equipment used in the impact air monitoring programme. Copies of calibration certificates are attached in **Appendix B**.

**Table 2.2** Air Quality Monitoring Equipment

| Equipment             | Model and Make                                      | Quantity |
|-----------------------|-----------------------------------------------------|----------|
| Calibrator            | TISCH TE-5025A                                      | 1        |
| 1-hour TSP Dust Meter | Laser Dust Monitor – Model LD-3, LD-3B, AEROCET-531 | 6        |
| HVS Sampler           | GMWS 2310 c/w of TSP sampling inlet                 | 2        |
| Wind Anemometer       | Davis Weather Monitor II, Model no. 7440            | 1        |

#### **Monitoring Parameters, Frequency and Duration**

2.4 Table 2.3 summarizes the monitoring parameters and frequencies of impact dust monitoring for the whole construction period. The air quality monitoring schedule for the reporting

month is shown in **Appendix D**.

 Table 2.3
 Impact Dust Monitoring Parameters, Frequency and Duration

| Parameters | Frequency            |
|------------|----------------------|
| 1-hr TSP   | Three times / 6 days |
| 24-hr TSP  | Once / 6 days        |

#### Monitoring Methodology and QA/QC Procedure

1-hour TSP Monitoring

(Equipment: Sibata; Model no. LD-3, LD-3B)

#### **Measuring Procedures**

- 2.5 The measuring procedures of the 1-hour dust meters were in accordance with the Manufacturer's Instruction Manual as follows:
  - Pull up the air sampling inlet cover
  - Change the Mode 0 to BG with once
  - Push Start/Stop switch once
  - Turn the knob to SENSI.ADJ and press it
  - Push Start/Stop switch once
  - Return the knob to the position MEASURE slowly
  - Push the timer set switch to set measuring time
  - Remove the cap and make a measurement

#### Maintenance/Calibration

2.6 The following maintenance/calibration was required for the direct dust meters:

Check the meter at a 3-month interval and calibrate the meter at a 1-year interval throughout all stages of the air quality monitoring.

24-hour TSP Monitoring

#### Instrumentation

2.7 High volume (HVS) samplers (Model GMWS-2310 Accu-Vol) completed with appropriate sampling inlets were employed for 24-hour TSP monitoring. The sampler was composed of a motor, a filter holder, a flow controller and a sampling inlet and its performance specification complied with that required by USEPA Standard Title 40, Code of Federation Regulations Chapter 1 (Part 50). Moreover, the HVS also met all the requirements in section 2.5 of the updated EM&A Manual.

#### Operating/Analytical Procedures

- 2.8 Operating/analytical procedures for the operation of HVS were as follows:
  - A horizontal platform was provided with appropriate support to secure the samplers

- against gusty wind.
- No two samplers were placed less than 2 meters apart.
- The distance between the sampler and an obstacle, such as buildings, was at least twice the height that the obstacle protrudes above the sampler.
- A minimum of 2 meters of separation from walls, parapets and penthouses was required for rooftop samples.
- A minimum of 2 meters separation from any supporting structure, measured horizontally was required.
- No furnaces or incineration flues were nearby.
- Airflow around the sampler was unrestricted.
- The sampler was more than 20 meters from the drip line.
- Any wire fence and gate, to protect the sampler, should not cause any obstruction during monitoring.
- 2.9 Prior to the commencement of the dust sampling, the flow rate of the high volume sampler was properly set (between 1.1 m³/min. and 1.4 m³/min.) in accordance with the manufacturer's instruction to within the range recommended in USEPA Standard Title 40, CFR Part 50.
- 2.10 For TSP sampling, fiberglass filters have a collection efficiency of > 99% for particles of 0.3µm diameter were used.
- 2.11 The power supply was checked to ensure the sampler worked properly. On sampling, the sampler was operated for 5 minutes to establish thermal equilibrium before placing any filter media at the designated air monitoring station.
- 2.12 The filter holding frame was then removed by loosening the four nuts and a weighted and conditioned filter was carefully centered with the stamped number upwards, on a supporting screen.
- 2.13 The filter was aligned on the screen so that the gasket formed an airtight seal on the outer edges of the filter. Then the filter holding frame was tightened to the filter holder with swing bolts. The applied pressure should be sufficient to avoid air leakage at the edges.
- 2.14 The shelter lid was closed and secured with the aluminum strip.
- 2.15 The timer was then programmed. Information was recorded on the record sheet, which included the starting time, the weather condition and the filter number (the initial weight of the filter paper can be found out by using the filter number).
- 2.16 After sampling, the filter was removed and sent to the HOKLAS laboratory (Wellab Ltd.) for weighing. The elapsed time was also recorded.
- 2.17 Before weighing, all filters were equilibrated in a conditioning environment for 24 hours. The conditioning environment temperature should be between 25°C and 30°C and not vary by more than ±3°C; the relative humidity (RH) should be < 50% and not vary by more than ±5%. A convenient working RH is 40%.

#### Maintenance/Calibration

- 2.18 The following maintenance/calibration was required for the HVS:
  - The high volume motors and their accessories were properly maintained. Appropriate maintenance such as routine motor brushes replacement and electrical wiring checking were made to ensure that the equipment and necessary power supply are in good working condition.
  - High volume samplers were calibrated at bi-monthly intervals using TE-5025A Calibration Kit throughout all stages of the air quality monitoring.

#### **Results and Observations**

- 2.19 All 1-hour TSP monitoring was conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded.
- 2.20 All 24-hour TSP monitoring was conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded.
- 2.21 The air temperature, precipitation and the relative humidity data was obtained from Hong Kong Observatory where the wind speed and wind direction were recorded by the installed Wind Anemometer set at rooftop (about 8/F) Lee Kau Yan Memorial School. The location is shown in **Figure 4**. This weather information for the reporting month is summarized in **Appendix C.**
- 2.22 The monitoring data and graphical presentations of 1-hour and 24-hour TSP monitoring results are shown in **Appendices E and F** respectively.
- 2.23 The summary of exceedance record in reporting month is shown in **Appendix H**. No exceedance was recorded for the air quality monitoring.
- 2.24 According to our field observations, the major dust source identified at the designated air quality monitoring stations are as follows:

| Station                                      | Major Dust Source                     |  |
|----------------------------------------------|---------------------------------------|--|
|                                              | Road Traffic Dust                     |  |
| AM1(B) – Contractor Site Office (KL/2012/02) | Exposed site area and open stockpiles |  |
|                                              | Site vehicle movement                 |  |
|                                              | Road Traffic Dust                     |  |
| AM2 – Lee Kau Yan Memorial School            | Exposed site area and open stockpiles |  |
|                                              | Excavation works                      |  |
|                                              | Site vehicle movement                 |  |

2.25 Table 2.4 shows the summary of air quality monitoring results during the reporting month.

Table 2.4 Summary Table of Air Quality Monitoring Results during the reporting month

| Parameter                    | Date             | Concentration (µg/m3) | Action Level,<br>µg/m3 | Limit Level,<br>µg/m3 |
|------------------------------|------------------|-----------------------|------------------------|-----------------------|
| AM1(B) – Contractor Site Off | ice (KL/2012/02) |                       |                        |                       |
|                              | 4-Jan-17         | 220.7                 |                        |                       |
|                              | 4-Jan-17         | 222.2                 |                        |                       |
|                              | 4-Jan-17         | 198.3                 |                        |                       |
|                              | 10-Jan-17        | 208.0                 |                        |                       |
|                              | 10-Jan-17        | 212.2                 |                        |                       |
|                              | 10-Jan-17        | 217.0                 |                        |                       |
|                              | 16-Jan-17        | 224.3                 |                        |                       |
| 1-hr TSP                     | 16-Jan-17        | 219.3                 | 342                    | 500                   |
|                              | 16-Jan-17        | 215.8                 |                        |                       |
|                              | 20-Jan-17        | 177.2                 | 7                      |                       |
|                              | 20-Jan-17        | 179.8                 | 7                      |                       |
|                              | 20-Jan-17        | 181.1                 | 7                      |                       |
|                              | 26-Jan-17        | 192.4                 |                        |                       |
|                              | 26-Jan-17        | 197.1                 |                        |                       |
|                              | 26-Jan-17        | 201.7                 |                        |                       |
|                              | 3-Jan-17         | 77.5                  |                        |                       |
|                              | 9-Jan-17         | 87.1                  | 159                    | 260                   |
| 04.1 TOD                     | 13-Jan-17        | 70.8                  |                        |                       |
| 24-hr TSP                    | 19-Jan-17        | 61.5                  |                        |                       |
|                              | 25-Jan-17        | 88.4                  |                        |                       |
|                              | 27-Jan-17        | 68.0                  |                        |                       |
| M2 – Lee Kau Yan Memoria     | al School        |                       |                        |                       |
|                              | 4-Jan-17         | 93.3                  |                        |                       |
|                              | 4-Jan-17         | 89.7                  |                        |                       |
|                              | 4-Jan-17         | 92.4                  |                        |                       |
|                              | 10-Jan-17        | 193.3                 |                        |                       |
|                              | 10-Jan-17        | 184.4                 |                        |                       |
|                              | 10-Jan-17        | 211.7                 |                        |                       |
|                              | 16-Jan-17        | 182.5                 |                        |                       |
| 1-hr TSP                     | 16-Jan-17        | 183.4                 | 346                    | 500                   |
|                              | 16-Jan-17        | 186.0                 |                        |                       |
|                              | 20-Jan-17        | 173.0                 |                        |                       |
|                              | 20-Jan-17        | 178.0                 |                        |                       |
|                              | 20-Jan-17        | 184.4                 |                        |                       |
|                              | 26-Jan-17        | 222.4                 |                        |                       |
|                              | 26-Jan-17        | 230.2                 | 7                      |                       |
|                              | 26-Jan-17        | 232.2                 | 7                      |                       |
|                              | 3-Jan-17         | 71.1                  |                        |                       |
|                              | 9-Jan-17         | 129.5                 | 7                      |                       |
| 24 L. TOD                    | 13-Jan-17        | 27.1                  | 157                    | 260                   |
| 24-hr TSP                    | 19-Jan-17        | 92.4                  | 157                    | 260                   |
|                              | 25-Jan-17        | 93.6                  |                        |                       |
|                              | 27-Jan-17        | 68.7                  |                        |                       |

#### 3. NOISE

#### **Monitoring Requirements**

3.1 According to EM&A Manuals under the EP, construction noise monitoring was conducted to monitor the construction noise arising from the construction activities within KTD. The regular monitoring frequency for each monitoring station shall be on a weekly basis and conduct one set of measurements between 0700 and 1900 hours on normal weekdays. **Appendix A** shows the established Action and Limit Levels for the environmental monitoring works.

#### **Monitoring Locations**

3.2 Four designated monitoring stations were selected for noise monitoring programme. Noise monitoring was conducted at three designated monitoring stations (M3, M4, M9). **Figure 3** shows the locations of these stations.

**Table 3.1 Noise Monitoring Stations** 

| <b>Monitoring Stations</b> | Locations                   | <b>Location of Measurement</b> |
|----------------------------|-----------------------------|--------------------------------|
| M3                         | Cognitio College            | Rooftop (about 6/F) Area       |
| M4                         | Lee Kau Yan Memorial School | Rooftop (about 7/F) Area       |
| M9                         | Tak Long Estate             | Car Park Building (about 2/F)  |
| #M10                       | Site 1B4 (Planned)          | _                              |

Remarks: # The impact monitoring at these locations will only be carried out until existence of the sensitive receiver at the building.

#### **Monitoring Equipment**

**Table 3.2** summarizes the noise monitoring equipment. Copies of calibration certificates are provided in **Appendix B**.

**Table 3.2** Noise Monitoring Equipment

| Equipment                     | Model and Make    | Qty. |
|-------------------------------|-------------------|------|
| Integrating Sound Level Meter | SVAN 955 & 957    | 6    |
| Calibrator                    | SVAN 30A, B&K4231 | 5    |

#### **Monitoring Parameters, Frequency and Duration**

3.4 Table 3.3 summarizes the monitoring parameters, frequency and total duration of monitoring. The noise monitoring schedule is shown in **Appendix D**.

**Table 3.3** Noise Monitoring Parameters, Frequency and Duration

| Monitoring<br>Stations | Parameter                                                                                             | Period                                    | Frequency        | Measurement |
|------------------------|-------------------------------------------------------------------------------------------------------|-------------------------------------------|------------------|-------------|
| M3<br>M4<br>M9         | L <sub>10</sub> (30 min.) dB(A)<br>L <sub>90</sub> (30 min.) dB(A)<br>L <sub>eq</sub> (30 min.) dB(A) | 0700-1900<br>hrs on<br>normal<br>weekdays | Once per<br>week | Façade      |

#### Monitoring Methodology and QA/QC Procedures

- The Sound Level Meter was set on a tripod at a height of 1.2 m above the ground.
- The battery condition was checked to ensure the correct functioning of the meter.
- Parameters such as frequency weighting, the time weighting and the measurement time were set as follows:

frequency weighting
time weighting
time measurement
: A
: Fast
: 30 minutes

- Prior to and after each noise measurement, the meter was calibrated using a Calibrator for 94.0 dB at 1000 Hz. If the difference in the calibration level before and after measurement was more than 1.0 dB, the measurement would be considered invalid and repeat of noise measurement would be required after re-calibration or repair of the equipment.
- The wind speed was frequently checked with the portable wind meter.
- At the end of the monitoring period, the  $L_{eq}$ ,  $L_{90}$  and  $L_{10}$  were recorded. In addition, site conditions and noise sources were recorded on a standard record sheet.
- Noise measurement was paused temporarily during periods of high intrusive noise if possible and observation was recorded when intrusive noise was not avoided.
- Noise monitoring was cancelled in the presence of fog, rain, and wind with a steady speed exceeding 5 m/s, or wind with gusts exceeding 10 m/s.

#### **Maintenance and Calibration**

- 3.5 The microphone head of the sound level meter and calibrator were cleaned with a soft cloth at quarterly intervals.
- 3.6 The sound level meter and calibrator were checked and calibrated at yearly intervals.
- 3.7 Immediately prior to and following each noise measurement the accuracy of the sound level meter shall be checked using an acoustic calibrator generating a known sound pressure level at a known frequency. Measurements may be accepted as valid only if the calibration levels from before and after the noise measurement agree to within 1.0 dB.

#### **Results and Observations**

- 3.8 All construction noise monitoring was conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded. The summary of exceedance record in reporting month is shown in **Appendix H**.
- 3.9 The baseline noise level and the Noise Limit Level at each designated noise monitoring station are presented in **Table 3.4**.
- 3.10 Noise monitoring results and graphical presentations are shown in **Appendix G**.

Monthly EM&A Report – January 2017

#### 3.11 The major noise source identified at the designated noise monitoring stations are as follows:

| Monitoring<br>Stations | Locations                   | Major Noise Source                                                                        |
|------------------------|-----------------------------|-------------------------------------------------------------------------------------------|
| M3                     | Cognitio College            | Traffic Noise Daily school activities                                                     |
| M4                     | Lee Kau Yan Memorial School | Traffic Noise Site vehicle movement Excavation works Piling works Daily school activities |
| M9                     | Tak Long Estate             | Traffic Noise<br>Construction works                                                       |

**Table 3.4** Baseline Noise Level and Noise Limit Level for Monitoring Stations

| Station | Baseline Noise Level, dB (A)                                       | Noise Limit Level,dB (A)                   |
|---------|--------------------------------------------------------------------|--------------------------------------------|
| M3      | 76.3/78.6 <sup>(1)</sup> (at 0700 – 1900 hrs on normal weekdays) / | 70* (at 0700 – 1900 hrs on                 |
| M4      | 76.7 (at 0700 – 1900 hrs on normal weekdays)                       | *                                          |
| M9      | 59.9 (at 0700 – 1900 hrs on normal weekdays)                       | 75 (at 0700 – 1900 hrs on normal weekdays) |

<sup>(\*)</sup> Noise Limit Level is 65 dB(A) during school examination periods.

Note (1): The baseline noise review report submitted under KLN/2013/16 for M3 was approved by EPD on 23<sup>rd</sup> August 2013. (Baseline Level was found to be 78.6 dB(A)at Rooftop of Cognitio College)

**Table 3.5** Summary Table of Noise Monitoring Results during the Reporting Month

| Date                 | Measured Noise<br>Level,<br>Leq(30min) dB (A) | Baseline Level<br>dB (A)        | Construction Noise Level (1):<br>Leq(30min) dB (A) |  |  |
|----------------------|-----------------------------------------------|---------------------------------|----------------------------------------------------|--|--|
| M3 – Cognitio        | College                                       | (2)                             |                                                    |  |  |
|                      |                                               | Background Noise <sup>(2)</sup> |                                                    |  |  |
| 4-Jan-17             | 79.7                                          | 79.6                            | 63.3                                               |  |  |
| 10-Jan-17            | 78.2                                          | 78.3                            | $78.2 \text{ Measured} \leq \text{Background}$     |  |  |
| 16-Jan-17            | 64.3                                          | 64.0                            | 52.5                                               |  |  |
| 26-Jan-17            | 78.3                                          | 79.0                            | $78.3 \text{ Measured} \leq \text{Background}$     |  |  |
| M4 – Lee Kau         | M4 – Lee Kau Yan Memorial School              |                                 |                                                    |  |  |
| 4-Jan-17             | 76.4                                          |                                 | 76.4 Measured $\leq$ Baseline                      |  |  |
| 10-Jan-17            | 76.5                                          | 76.7                            | 76.5 Measured $\leq$ Baseline                      |  |  |
| 16-Jan-17            | 65.3                                          | 70.7                            | 65.3 Measured ≤ Baseline                           |  |  |
| 26-Jan-17            | 73.9                                          |                                 | 73.9 Measured ≤ Baseline                           |  |  |
| M9 – Tak Long Estate |                                               |                                 |                                                    |  |  |
| 3-Jan-17             | 59.4                                          |                                 | 59.4 Measured ≤ Baseline                           |  |  |
| 12-Jan-17            | 62.3                                          | 59.9                            | 58.6                                               |  |  |
| 18-Jan-17            | 63.6                                          | 39.9                            | 61.2                                               |  |  |
| 23-Jan-17            | 64.5                                          |                                 | 62.7                                               |  |  |

Note (1) The noise level due to the construction work (CNL) was calculated by the following formula:

 $CNL = 10 \log (10^{MNL/10} - 10^{BNL/10})$ 

Remarks: MNL = Measured Noise Level BNL = Baseline Noise Level

(2): The background Noise Level was recorded during the Lunch Hour of Construction Site (i.e. 12:00-13:00) and to be used as the referencing value for compliance checking for Noise Action and Limit Level.

#### 4. COMPARISON OF EM&A RESULTS WITH EIA PREDICTIONS

4.1 The EM&A data was compared with the EIA predictions as summarized in Tables 4.1 to 4.3.

Table 4.1 Comparison of 1-hr TSP data with EIA predictions

|                                          |                                               | D 11 / 14 1 / (CO)                             |                                 |  |  |
|------------------------------------------|-----------------------------------------------|------------------------------------------------|---------------------------------|--|--|
|                                          |                                               | Predicted 1-hr TSP conc.                       |                                 |  |  |
| Station                                  | Scenario1 (Mid<br>2009 to Mid<br>2013), µg/m3 | Scenario2 (Mid<br>2013 to Late<br>2016), µg/m3 | Reporting Month (Jan 17), µg/m3 |  |  |
| AM1(B) – Contracto<br>Office of KL/2012/ | 1 197                                         | 298                                            | 204.5                           |  |  |
| AM 2 – Lee Kau Y<br>Memorial School      | 790                                           | 312                                            | 175.8                           |  |  |

Table 4.2 Comparison of 24-hr TSP data with EIA predictions

|                                                  | Predicted 24-hr TSP conc.                                                                                          |     |                                 |  |  |  |
|--------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|-----|---------------------------------|--|--|--|
| Station                                          | Scenario1 (Mid       Scenario2 (Mid         2009 to Mid       2013 to Late         2013), μg/m3       2016), μg/m3 |     | Reporting Month (Jan 17), µg/m3 |  |  |  |
| AM1(B) – Contractor Site<br>Office of KL/2012/02 | 121                                                                                                                | 156 | 75.5                            |  |  |  |
| AM2 – Lee Kau Yan<br>Memorial School             | 145                                                                                                                | 169 | 80.4                            |  |  |  |

Table 4.3 Comparison of Noise Monitoring Data with EIA predictions

| Stations                            | Predicted Mitigated Construction Noise Levels during Normal Working Hour (Leq (30min) dB(A)) | Reporting Month (Jan 17),<br>Leq (30min) dB(A) |  |
|-------------------------------------|----------------------------------------------------------------------------------------------|------------------------------------------------|--|
| M3 – Cognitio College               | 47 - 75                                                                                      | $52.5 - 78.3^{(1)}$                            |  |
| M4 – Lee Kau Yan<br>Memorial School | 47 – 74                                                                                      | $65.3 - 76.5^{(2)}$                            |  |
| M9 – Tak Long Estate                | Not Predicted in EIA Report                                                                  | 58.6 – 62.7                                    |  |

#### Remark:

- (1) Since the background noise level recorded during 12:00 to 13:00 was higher than those recorded during the construction period, the recorded noise levels were considered non-valid exceedance of Noise Limit Level.
- (2) Since the baseline noise level was higher than those recorded during the construction period, the recorded noise levels were considered non-valid exceedance of Noise Limit Level.
- 4.2 The 1-hour TSP concentrations in the reporting month were below to the prediction in the approved Environmental Impact Assessment (EIA) Report.
- 4.3 The 24-hour TSP concentrations in the reporting month were below to the prediction in the approved Environmental Impact Assessment (EIA) Report.

4.4 Mitigated construction noise levels at M9 were not predicted in EIA Report. The noise monitoring results in the reporting month at M3 & M4 were not within the range of predicted mitigated construction noise levels in the EIA report. For M3, please refer to remark in Table 4.3. The noise data at M4 exceeds the prediction of mitigated scenario in EIA report but did not exceed the baseline level.

#### 5. LANDSCAPE AND VISUAL

### **Monitoring Requirements**

5.1 According to EM&A Manual of the Kai Tak Development EIA Study, ET shall monitor and audit the contractor's operation during the construction period on a weekly basis, and to report on the contractor's compliance.

#### **Results and Observations**

- 5.2 Site audits were carried out on a weekly basis to monitor and audit the timely implementation of landscape and visual mitigation measures within the site boundaries of this Project. The summaries of site audits are attached in **Appendix I**.
- 5.3 No non-compliance of the landscape and visual impact was recorded in the reporting month.
- 5.4 Should non-compliance of the landscape and visual impact occur, action in accordance with the action plan presented in **Appendix J** shall be performed.

#### 6. ENVIRONMENTAL AUDIT

#### **Site Audits**

- 6.1 Site audits were carried out on a weekly basis to monitor the timely implementation of proper environmental management practices and mitigation measures in the Project site. The summaries of site audits are attached in **Appendix I**.
- 6.2 Site audits were conducted on 4<sup>th</sup>, 11<sup>th</sup>, 18<sup>th</sup> and 24<sup>th</sup> January 2017 in the reporting month. IEC site inspection was conducted on 24<sup>th</sup> January 2017. No non-compliance was observed during the site audits.

#### **Review of Environmental Monitoring Procedures**

6.3 The monitoring works conducted by the monitoring team were inspected regularly. The following observations have been recorded for the monitoring works:

#### Air Quality Monitoring

- The monitoring team recorded all observations around the monitoring stations within and outside the construction site.
- The monitoring team recorded the temperature and weather conditions on the monitoring days.

#### Noise Monitoring

- The monitoring team recorded all observations around the monitoring stations, which might affect the monitoring result.
- Major noise sources were identified and recorded. Other intrusive noise attributing to the result was trimmed off by pausing the monitoring temporarily.

#### Status of Environmental Licensing and Permitting

6.4 All permits/licenses obtained for the Project are summarized in Table 6.1.

| Table 0.1 Sullinary of Entriconnection Licensing and Lethin Status | Table 6.1 | Summary | of Environmental | Licensing and Permit Status |
|--------------------------------------------------------------------|-----------|---------|------------------|-----------------------------|
|--------------------------------------------------------------------|-----------|---------|------------------|-----------------------------|

| Permit No.                  | Valid Period                            |          | Details                                                                                                                                                                         | Status                  |  |
|-----------------------------|-----------------------------------------|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|--|
| Permit No.                  | From                                    | To       | Details                                                                                                                                                                         | Status                  |  |
| <b>Environmental Pe</b>     | rmit (EP)                               |          |                                                                                                                                                                                 |                         |  |
| EP-337/2009                 | 23/04/09                                | N/A      | Construction of new distributor roads serving the planned Kai Tak development.                                                                                                  | Valid                   |  |
| Effluent Discharge          | License                                 |          | •                                                                                                                                                                               |                         |  |
| WT00016873-2013             | -                                       | 31/08/18 | Wastewater from the construction site                                                                                                                                           | Valid                   |  |
| WT00016723-2013             | -                                       | 31/08/18 | including contaminated surface run-off                                                                                                                                          | Valid                   |  |
| <b>Registration of Chem</b> | Registration of Chemical Waste Producer |          |                                                                                                                                                                                 |                         |  |
| 5213-286-K3022-<br>04       | -                                       | N/A      | Chemical Waste Types: Spent lubricating oil, Soil contaminated with lubricating oil, Spent battery containing heavy metals, Surplus paint, Spend solvent, Spend alkali and acid | Valid                   |  |
| <b>Construction Noise</b>   | Permit (CNI                             | P)       |                                                                                                                                                                                 |                         |  |
| GW-RE0646-16                | 14/09/16                                | 13/03/17 |                                                                                                                                                                                 | Valid                   |  |
| GW-RE0648-16                | 25/07/16                                | 24/01/17 |                                                                                                                                                                                 | Valid until<br>24/01/17 |  |
| GW-RE1041-16                | 27/10/16                                | 23/04/17 | Construction Noise Permit for the use of powered mechanical equipment for                                                                                                       | Valid                   |  |
| GW-RE1054-16                | 28/10/16                                | 23/04/17 | carrying out construction work other than                                                                                                                                       | Valid                   |  |
| GW-RE1197-16                | 17/12/16                                | 12/03/17 | percussive pilling and performing prescribed construction work.                                                                                                                 | Valid                   |  |
| GW-RE0069-17                | 27/01/17                                | 31/05/17 |                                                                                                                                                                                 | Valid                   |  |
| GW-RE0070-17                | 09/02/17                                | 31/05/17 |                                                                                                                                                                                 | Valid from<br>09/02/17  |  |

### **Status of Waste Management**

- 6.5 The amount of wastes generated by the major site activities of this Project during the reporting month is shown in **Appendix M**.
- 6.6 The Contractor is advised to take photo and inspection records to ensure that all dump trucks have the skip fully covered before leaving the site.

#### **Implementation Status of Environmental Mitigation Measures**

6.7 During site inspections in the reporting month, no non-conformance was identified. ET weekly site inspections were carried out during the reporting month and the observations and recommendations are summarized in Table 6.2.

 Table 6.2
 Observations and Recommendations of Site Inspections

| Parameters                       | Date                | Observations and Recommendations                                                                                                                                         | Follow-up                                                                  |
|----------------------------------|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|
| Water Quality                    |                     |                                                                                                                                                                          |                                                                            |
|                                  | 28 December<br>2016 | Observation: Dust suppression measures should be provided to supress the dust generation arise from the construction works at VT1.                                       | Rectification/improvement was observed during the follow-up audit session. |
| Air Quality                      | 4 January<br>2017   | Reminder: The stockpiles of dusty material should be provided by impervious material to prevent the dusty emission near PERE, carpark, near VT1 and near Tsat Po Street. | Rectification/improvement was observed during the follow-up audit session. |
|                                  | 11 January<br>2017  | Observation: The accumulated muddy track on the haul road near the site entrance adjacent to the carpark should be cleared.                                              | Rectification/improvement was observed during the follow-up audit session. |
|                                  | 24 January<br>2017  | Observation: Dusty stockpile placed at SW3 should be properly covered to suppress dust generation.                                                                       | Follow-up action will be reported in the next report month.                |
| Noise                            |                     |                                                                                                                                                                          |                                                                            |
|                                  | 4 January<br>2017   | Reminder: The construction waste should be cleared properly and regularly to prevent the accumulation at SW3.                                                            | Rectification/improvement was observed during the follow-up audit session. |
| Waste/<br>Chemical<br>Management | 24 January<br>2017  | Observation: Wastes and construction materials at VT1 and near Tsat Po Street should be removed to prevent accumulation.                                                 | Follow-up action will be reported in the next report month.                |
|                                  | 24 January<br>2017  | Reminder: Chemical containers placed in SW3 should be properly removed or stored at appropriate storage area.                                                            | Follow-up action will be reported in the next report month.                |
|                                  | 28 December 2016    | Reminder: The fencing of tree protection zone at SW3 should be properly erected and maintained.                                                                          | Rectification/improvement was observed during the follow-up audit session. |
| Landscape<br>and Visual          | 11 January<br>2017  | Reminder: The fencing of tree protection zone near VT1 should be properly erected and maintained.                                                                        | This item was remarked on 18 January 2017.                                 |
|                                  | 18 January<br>2017  | Reminder: The fencing of tree protection zone near VT1 should be properly erected and maintained.                                                                        | Follow-up action will be reported in the next report month.                |
| Permits/<br>Licenses             |                     |                                                                                                                                                                          |                                                                            |

#### **Summary of Mitigation Measures Implemented**

6.8 The monthly IEC audit was carried out on 24<sup>th</sup> January 2017, the observations were recorded and they are presented as follows:

#### Observations / Reminder:

- Not all dusty materials were properly covered by impervious materials at SW3 and King Fuk Street. The Contractor was recommended to cover the stockpiles and dusty materials to avoid any possible air and water pollution.
- Wheel-washing was not provided to all vehicles leaving the site. The Contactor was recommended to offer wheel-washing to all vehicles leaving the site.
- Not all water drains and culverts were properly covered or sealed at Tsat Po Street. It
  was recommended that the Contractor should cover all culverts and water drains to
  avoid any slit or litter getting into the drainage system.
- General and C&D waste were found at CLP substation, King Fuk Street and Tsat Po Street. The Contractor should remove, sort and store waste properly from the site.

#### Reminder:

• Chemical containers should be properly sealed and stored at appropriate storage areas.

#### Follow up of last observation:

- No major environmental deficiency was observed during the site inspection conducted on 15<sup>th</sup> December 2016.
- 6.9 An updated summary of the EMIS is provided in **Appendix K**.

#### **Implementation Status of Event Action Plans**

6.10 The Event Action Plans for air quality, noise and landscape and visual are presented in **Appendix J**.

#### 1-hr TSP Monitoring

6.11 No Action/Limit Level exceedance was recorded in the reporting month.

#### 24-hr TSP Monitoring

6.12 No Action/Limit Level exceedance was recorded in the reporting month.

#### Construction Noise

6.13 No Action/Limit Level exceedance was recorded in the reporting month.

#### Landscape and visual

6.14 No non-compliance was recorded in the reporting month.

## Summary of Complaint, Warning, Notification of any Summons and Successful Prosecution

6.15 The summaries of environmental complaint, warning, summon and notification of successful prosecution for the Project is presented in **Appendix L**.

#### 7. FUTURE KEY ISSUES

- 7.1 Major site activities undertaken for the coming two months include:
  - Site Clearance for all possessed portion;
  - Condition survey and monitoring survey;
  - Road and drainage works at Sze Mei Street;
  - Painting and Roadwork at VT1;
  - VE panel installation at SW2 and SW3;
  - PERE Stage 1 works;
  - Earthwork at Portion E3;
  - RC for SW2 and SW3;
  - Drainage works for connection to box culvert adjacent to KTOB; and
  - Road works at King Fuk Street

#### **Key Issues for the Coming Month**

- 7.2 Key environmental issues in the coming month include:
  - Wastewater and runoff discharge from site;
  - Regular removal of silt, mud and sand along u-channels and sedimentation tanks;
  - Review and implementation of temporary drainage system for the surface runoff;
  - Noise from operation of the equipment, especially for rock-breaking activities, piling works and machinery on-site;
  - Dust generation from stockpiles of dusty materials, exposed site area, excavation works and rock breaking activities;
  - Water spraying for dust generating activity and on haul road;
  - Proper storage of construction materials on site;
  - Storage of chemicals/fuel and chemical waste/waste oil on site;
  - Accumulation of general and construction waste on site.
- 7.3 The tentative program of major site activities and the impact prediction and control measures for the coming two months, i.e. February 2017 and March 2017 are summarized as follows:

| <b>Construction Works</b>   | Major Impact<br>Prediction                                        | Control Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-----------------------------|-------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| As mentioned in Section 7.1 | Air quality impact (dust)  Water quality impact (surface run-off) | <ul> <li>(a) Frequent watering of haul road and unpaved/exposed areas;</li> <li>(b) Frequent watering or covering stockpiles with tarpaulin or similar means; and</li> <li>(c) Watering of any earth moving activities.</li> <li>(a) Diversion of the collected effluent to de-silting facilities for treatment prior to discharge to public storm water drains;</li> <li>(b) Provision of adequate de-silting facilities for treating surface run-off and other collected effluents prior to discharge;</li> <li>(c) Provision of perimeter protection such as sealing of hoarding footings to avoid run-off from entering the existing storm water drainage system via public road; and</li> <li>(d) Provision of measures to prevent discharge into the stream.</li> </ul> |
|                             | Noise Impact                                                      | <ul> <li>(a) Scheduling of noisy construction activities if necessary to avoid persistent noisy operation;</li> <li>(b) Controlling the number of plants use on site;</li> <li>(c) Regular maintenance of machines; and</li> <li>(d) Use of acoustic barriers if necessary.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

## **Monitoring Schedule for the Next Month**

7.4 The tentative environmental monitoring schedules for the next month are shown in **Appendix D**.

#### 8. CONCLUSIONS AND RECOMMENDATIONS

#### **Conclusions**

8.1 Environmental monitoring works were performed in the reporting month and all monitoring results were checked and reviewed.

#### 1-hr TSP Monitoring

8.2 All 1-hr TSP monitoring was conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded.

#### 24-hr TSP Monitoring

8.3 All 24-hr TSP monitoring was conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded.

#### **Construction Noise Monitoring**

8.4 All construction noise monitoring was conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded.

#### Landscape and visual

8.5 No non-compliance was recorded in the reporting month.

#### Complaint and Prosecution

- 8.6 No environmental complaints and environmental prosecution were received in the reporting month.
- 8.7 No environmental prosecution was received in the reporting month.

#### Recommendations

8.8 According to the environmental audit performed in the reporting month, the following recommendations were made:

#### Air quality

- To properly covered the stockpile stored within the site area to prevent dust generation; and
- To ensure the vehicle were wheel-washed to remove any dusty materials from its body and wheels before leaving the construction sites.


#### Waste / Chemical Management


- To dispose the general refuse and construction waste regularly to prevent accumulation.
- To properly store the chemical containers at appropriate storage area.


#### Landscape and Visual


• To properly maintain the fencing of tree protection zone to avoid damage to the retained tree.

## **FIGURES**

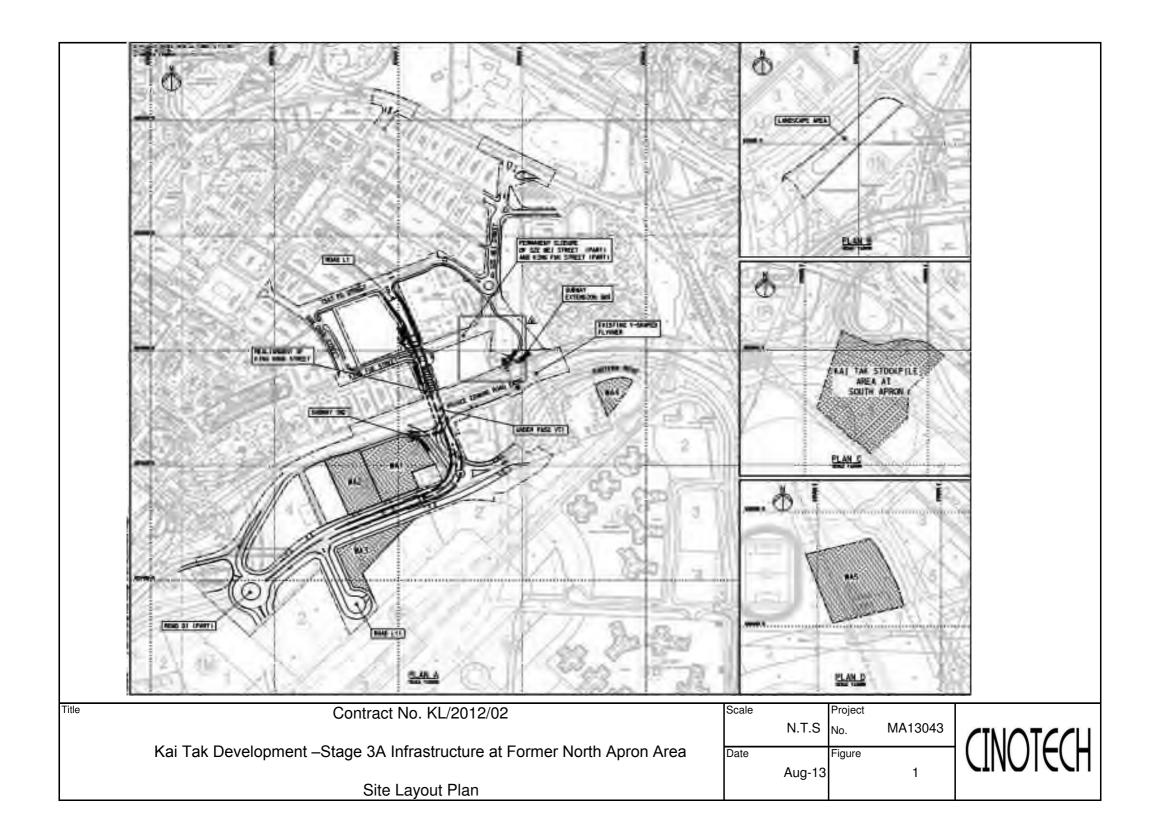

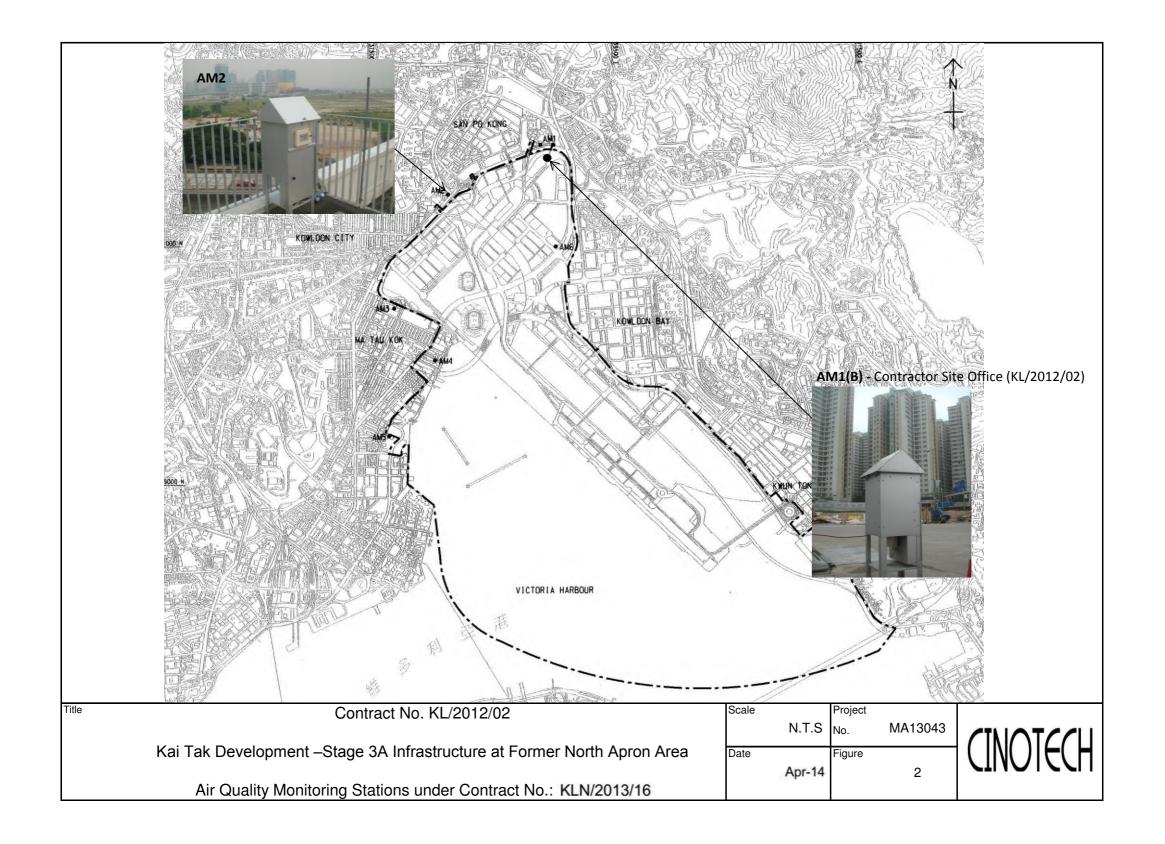

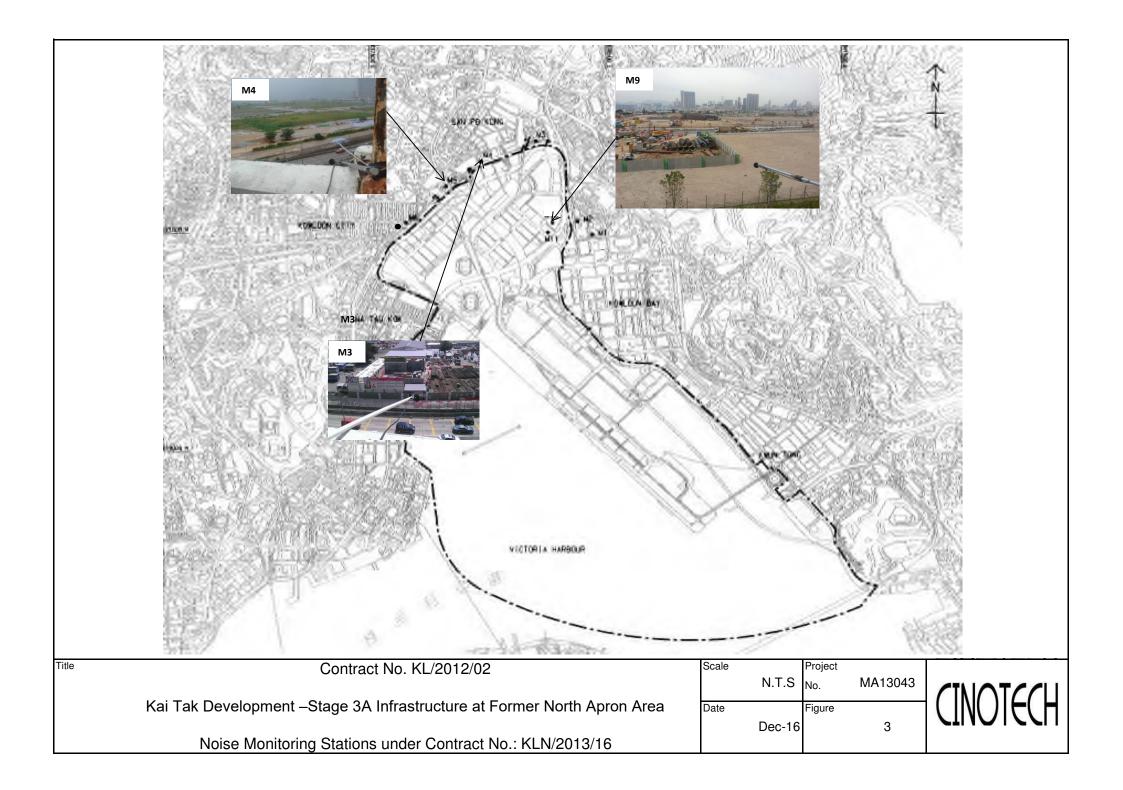

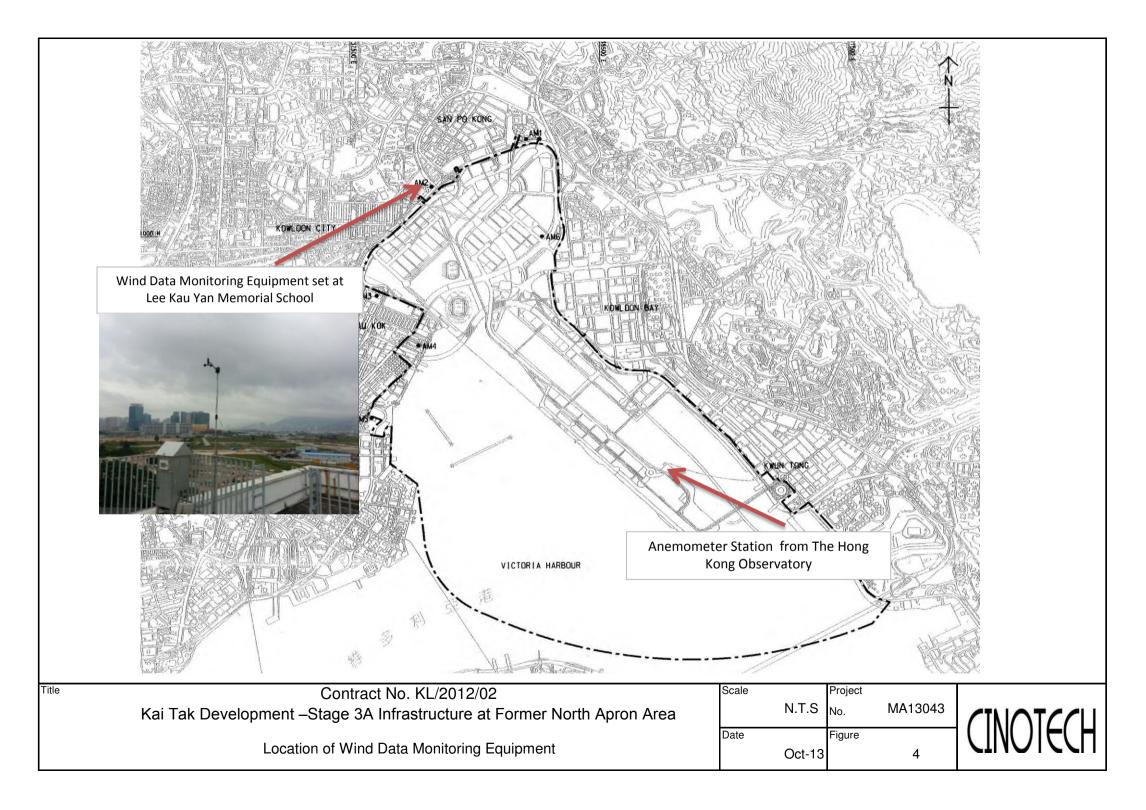

APPENDIX A
ACTION AND LIMIT LEVELS FOR AIR
QUALITY AND NOISE

## **Appendix A - Action and Limit Levels**

Table A-1 Action and Limit Levels for 1-Hour TSP

| Location | Action Level, μg/m <sup>3</sup> | Limit Level, μg/m³ |
|----------|---------------------------------|--------------------|
| AM1(B)   | 342                             | 500                |
| AM2      | 346                             | 500                |

**Table A-2** Action and Limit Levels for 24-Hour TSP

| Location | Action Level, μg/m <sup>3</sup> | Limit Level, μg/m³ |
|----------|---------------------------------|--------------------|
| AM1(B)   | 159                             | 260                |
| AM2      | 157                             | 260                |

Table A-3 Action and Limit Levels for Construction Noise

| Time Period                      | Action Level                              | Limit Level                  |
|----------------------------------|-------------------------------------------|------------------------------|
| 0700-1900 hrs on normal weekdays | When one documented complaint is received | 75 dB(A)<br>70dB(A)/65dB(A)* |

Remarks: If works are to be carried out during restricted hours, the conditions stipulated in the Construction Noise Permit (CNP) issued by the Noise Control Authority have to be followed. \*70dB(A) and 65dB(A) for schools during normal teaching periods and school examination periods, respectively.

APPENDIX B COPIES OF CALIBRATION CERTIFCATES



|                                                |                                         |                          |                                     |                                              |                                                             | File No                                                                                                       | MA14008/58/0037                      |
|------------------------------------------------|-----------------------------------------|--------------------------|-------------------------------------|----------------------------------------------|-------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|--------------------------------------|
| Station                                        | AM1(B) - Outsic                         | le RLJV site of          | fice (KL/2008/09)                   | Operator:                                    | WK                                                          |                                                                                                               |                                      |
| Date:                                          | 21-Nov-16                               |                          | _ 1                                 | Next Due Date:                               | 20-Jan-                                                     | -17                                                                                                           |                                      |
| Equipment No.:                                 | A-01-58                                 |                          | <b>-</b>                            | Serial No.                                   | 2357                                                        |                                                                                                               |                                      |
|                                                |                                         |                          | Ambient                             | Condition                                    |                                                             |                                                                                                               |                                      |
| Temperatu                                      | re, Ta (K)                              | 298.2                    | Pressure, Pa                        |                                              |                                                             | 762.7                                                                                                         |                                      |
|                                                |                                         |                          |                                     |                                              |                                                             |                                                                                                               |                                      |
|                                                |                                         | C                        | Prifice Transfer Sta                | andard Inform                                | ation                                                       |                                                                                                               |                                      |
| Serial                                         | No.:                                    | 2896                     | Slope, mc (CFM)                     | distriction of the second                    | Intercep                                                    | -0.05079                                                                                                      |                                      |
| Last Calibra                                   | ation Date:                             | 4-Mar-16                 |                                     |                                              | $\mathbf{pc} = [\Delta \mathbf{H} \times (\mathbf{Pa}/76)]$ |                                                                                                               |                                      |
| Next Calibr                                    | ation Date:                             | 3-Mar-17                 |                                     | $Qstd = \{ [\Delta H] \}$                    | x (Pa/760) x (298                                           | /Ta)] <sup>1/2</sup> -bc} / 1                                                                                 | ne                                   |
|                                                |                                         |                          |                                     | ACC C                                        |                                                             |                                                                                                               |                                      |
|                                                |                                         | Δ                        | Calibration of rfice                | 13r Sampier                                  |                                                             | HVS                                                                                                           |                                      |
| Calibration<br>Point                           | ΔH (orifice), in. of water              |                          | 60) x (298/Ta)] <sup>1/2</sup>      | Qstd (CFM)<br>X - axis                       | ΔW (HVS), in.                                               |                                                                                                               | 0) x (298/Ta)] <sup>1/2</sup> Y-axis |
| 1                                              | 11.6                                    | 3.41                     |                                     | 57.90                                        | 7.9                                                         |                                                                                                               | 2.81                                 |
| 2                                              | 9.8                                     | 3.13                     |                                     | 53.28                                        | 6.6                                                         |                                                                                                               | 2.57                                 |
| 3                                              | 7.7                                     | 2.78                     |                                     | 47.33                                        | 5.2                                                         |                                                                                                               | 2.28                                 |
| 4                                              | 5.0                                     | 2.24                     |                                     | 38.30                                        | 3.4                                                         |                                                                                                               | 1.85                                 |
| 5                                              | 3.3                                     |                          | 1.82                                | 31.28                                        | 2.1                                                         |                                                                                                               | 1.45                                 |
| By Linear Regr<br>Slope, mw =<br>Correlation c | ession of Y on X  0.0506  oefficient* = |                          | 9996                                | Intercept, bw =                              | -0.115                                                      | 52                                                                                                            |                                      |
|                                                | Coefficient < 0.99                      |                          |                                     |                                              |                                                             |                                                                                                               |                                      |
|                                                |                                         |                          | Set Point C                         | Calculation                                  |                                                             | 1858 - 1951 - 1952 - 1953 - 1953 - 1953 - 1953 - 1953 - 1953 - 1953 - 1953 - 1953 - 1953 - 1953 - 1953 - 1953 |                                      |
| From the TSP Fi                                | eld Calibration C                       | urve, take Qstd          | = 43 CFM                            |                                              |                                                             |                                                                                                               |                                      |
| From the Regres                                | sion Equation, the                      | e "Y" value acc          | ording to                           |                                              |                                                             |                                                                                                               |                                      |
|                                                |                                         |                          | $Qstd + bw = [\Delta W]$            | (Da 1760) (3                                 | 00/5-11/2                                                   |                                                                                                               |                                      |
|                                                |                                         | mw x                     | Qsta + bw − lΔw                     | x (Fa//00) x (2                              | 90/13/]                                                     |                                                                                                               |                                      |
| Therefore, Se                                  | et Point; W = ( my                      | w x Qstd + bw )          | ) <sup>2</sup> x ( 760 / Pa ) x ( 7 | Га / 298)=                                   | 4.24                                                        |                                                                                                               |                                      |
|                                                |                                         |                          |                                     |                                              |                                                             |                                                                                                               |                                      |
| Remarks:                                       |                                         |                          |                                     |                                              |                                                             |                                                                                                               |                                      |
|                                                |                                         |                          |                                     |                                              |                                                             |                                                                                                               |                                      |
| Conducted by:<br>Checked by:                   | Wk 7anj                                 | Signature:<br>Signature: | Kua                                 | <u>i                                    </u> |                                                             | Date: 2                                                                                                       | ulullb<br>Kalenber Oolb              |



|                                                |                            |                                           |                                   |                                             |                                         | File No                     | MA14008/58/0038                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|------------------------------------------------|----------------------------|-------------------------------------------|-----------------------------------|---------------------------------------------|-----------------------------------------|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Station                                        |                            | de RLJV site off                          | fice (KL/2008/09)                 | Operator:                                   | WK                                      |                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Date:                                          | 20-Jan-17                  |                                           | _ 1                               | Next Due Date:                              | 19-Mai                                  | r-17                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Equipment No.:                                 | : <u>A-01-58</u>           |                                           | Serial No.                        |                                             | 2357                                    | ·                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                                                |                            |                                           | Ambient (                         | Condition                                   |                                         |                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Temperatu                                      | ure, Ta (K)                | 288.7                                     | Pressure, Pa                      |                                             |                                         | 771.5                       | 200 (200 )                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|                                                |                            |                                           |                                   | · · · · · · · · · · · · · · · · · · ·       |                                         |                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                                                |                            | O                                         | rifice Transfer Sta               | ndard Inform                                | ation                                   |                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Serial No.: 2896                               |                            |                                           | Slope, mc (CFM)                   |                                             | Intercep                                |                             | -0.05079                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Last Calibr                                    | ation Date:                | 4-Mar-16                                  |                                   | mc x Qstd + l                               | $oc = [\Delta H \times (Pa/76)]$        | 60) x (298/Ta)              | 1/2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Next Calibr                                    | ration Date:               | 3-Mar-17                                  |                                   | $\mathbf{Qstd} = \{ [\Delta \mathbf{H}] \}$ | x (Pa/760) x (298                       | /Ta)] <sup>1/2</sup> -be} / | me                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|                                                |                            | •                                         |                                   |                                             |                                         |                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                                                |                            |                                           | Calibration of                    | TSP Sampler                                 | - 4 - 5 - 5 - 5 - 5 - 5 - 5 - 5 - 5 - 5 |                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Calibration                                    |                            | Or                                        | fice                              |                                             |                                         | HVS                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Point                                          | ΔH (orifice), in. of water | [ΔH x (Pa/760) x (298/Ta)] <sup>1/2</sup> |                                   | Qstd (CFM) X - axis                         | ΔW (HVS), in. of water                  | [ΔW x (Pa/76                | 0) x (298/Ta)] <sup>1/2</sup> Y-axis                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 1                                              | 11.8                       | 3.52                                      |                                   | 59.66                                       | 7.9                                     |                             | 2.88                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 2                                              | 9.7                        |                                           | 3.19                              | 54.17                                       | 6.8                                     |                             | 2.67                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 3                                              | 7.6                        |                                           | 2.82                              | 48.05                                       | 5.1                                     |                             | 2.31                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 4                                              | 5.2                        |                                           | 2.33                              | 39.89                                       | 3.5                                     |                             | 1.92                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 5                                              | 3.4                        | 1.89                                      |                                   | 32.42                                       | 2.2                                     |                             | 1.52                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| ~                                              |                            |                                           | 1<br>1989                         | ntercept, bw =                              | -0.110                                  | 08                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                                                | Coefficient < 0.99         |                                           |                                   |                                             |                                         |                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                                                |                            | Carrier and Propagation and Service       |                                   |                                             |                                         |                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| AMERICAN AND AND AND AND AND AND AND AND AND A |                            |                                           | Set Point C                       | alculation                                  |                                         |                             | 2 (Apr. 1998) 19 (Apr. 1991) 19 (Apr |
|                                                | ield Calibration C         | -                                         |                                   |                                             |                                         |                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| From the Regres                                | ssion Equation, the        | e "Y" value acco                          | ording to                         |                                             |                                         |                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                                                |                            | mw x (                                    | Qstd + bw = [ΔW x                 | x (Pa/760) x (2                             | 98/Ta)] <sup>1/2</sup>                  |                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| mı c ~                                         | (D. 1.4 ***                | A                                         | 2 (55)                            |                                             |                                         |                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Therefore, S                                   | et Point; $W = (mv)$       | w x Qstd + bw )                           | <sup>2</sup> x ( 760 / Pa ) x ( T | 'a / 298 ) =                                | 4.07                                    |                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                                                |                            |                                           | =                                 |                                             |                                         |                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                                                |                            |                                           |                                   |                                             |                                         |                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Remarks:                                       |                            |                                           |                                   |                                             |                                         |                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| romano,                                        |                            |                                           | ••••                              |                                             |                                         |                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                                                | :                          |                                           |                                   |                                             |                                         |                             | ***************************************                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Conducted by:                                  | enla Tong                  | Signature:                                | Kw                                | m /                                         |                                         | Date:                       | 70/1/217                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Checked by:                                    |                            | _                                         |                                   |                                             |                                         |                             | ) 7.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| спескей ву:                                    | <u> </u>                   | Signature:                                |                                   | <u> </u>                                    |                                         | Date:c                      | Jo January dol                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |



|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                            |                  |                                |                        |                                  | File No | MA14008/59/0039                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------------|--------------------------------|------------------------|----------------------------------|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Station                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | AM2 - Lee Kau              | Yan Memorial S   | School                         | Operator               | :WK                              |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Date:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 21-Nov-16                  | <del></del>      |                                | Next Due Date:         | : 20-Jan                         | -17     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Equipment No.:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | A-01-59                    |                  | _                              | Serial No.             | . 2354                           | -       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                            |                  |                                |                        |                                  |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 5.000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | - (K)                      | 000 -            | Ambient                        |                        |                                  |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Temperatu                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | ire, Ta (K)                | 298.6            | Pressure, Pa                   | (mmHg)                 |                                  | 762.2   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| The state of the s |                            | 12000            | rifice Transfer Sta            | ndard Info             | 1040a                            | V 1     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Seria                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | No.:                       | 2896             | Slope, mc (CFM)                | T                      | Intercep                         | t ho    | 0.05070                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Last Calibr                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                            | 4-Mar-16         | Biope, me (CFWI)               | •                      | $bc = [\Delta H \times (Pa/76)]$ |         | -0.05079                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Next Calibration Date:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                            | 3-Mar-17         |                                |                        | x (Pa/760) x (298                |         | <i>*</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| TVEXT CONTOURNED DAILS. 3-19101-17                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                            |                  | <u> </u>                       | Spece Mirms            | A (1 10 / 00) A (2 / 0           | " = a)  | HFC .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 199 <del>4</del> , 207, 20 |                  | Calibration of                 | TSP Sambler            |                                  |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Calibration                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | A Comment of the Control   | Or               | fice                           |                        | THE RESERVENCE AND A STATE       | HVS     | on the contract of the contrac |
| Point                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | AH (orifice)               |                  | 60) x (298/Ta)] <sup>1/2</sup> | Qstd (CFM)<br>X - axis | ΔW (HVS), in. of water           |         | 0) x (298/Ta)] <sup>1/2</sup> Y-axis                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 11.4                       | 3.38             |                                | 57.35                  | 7.3                              |         | 2.70                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 9.8                        |                  | 3.13                           | 53.23                  | 6.4                              |         | 2.53                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 7.6                        |                  | 2.76                           | 46.98                  | 5.0                              |         | 2.24                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 4.9                        |                  | 2.21                           | 37.89                  | 3.1                              |         | 1.76                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 3.3                        | 1.82             |                                | 31.25                  | 2.2                              |         | 1.48                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| By Linear Regr                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | ression of Y on X          |                  |                                |                        |                                  |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Slope , mw =                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                            |                  | ]                              | Intercept, bw          | -0.016                           | 58      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Correlation c                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                            |                  | 993                            | •                      |                                  |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| *If Correlation C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Coefficient < 0.99         | 0, check and rec | alibrate.                      |                        |                                  |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 88. S. C.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                            |                  |                                | Spania Brown - Cherry  |                                  |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 110                        |                  | Set Point C                    | alculation             |                                  |         | 100 CO                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | eld Calibration Co         |                  |                                |                        |                                  |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| rrom the Regres                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | sion Equation, the         | "Y" value acco   | rding to                       |                        |                                  |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                            | mw x (           | $Qstd + bw = [\Delta W]$       | (Pa/760) x (2)         | 98/Ta)] <sup>1/2</sup>           |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                            |                  | _                              |                        | ~ ~ ~ ~ ~ ~ ~ / / /              |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Therefore, Se                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | et Point; W = ( my         | w x Qstd + bw)   | x (760 / Pa) x ( T             | Ca/298)=               | 4.12                             |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| - 1111                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                            |                  |                                |                        |                                  |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                            | <u> </u>         |                                |                        |                                  |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| D                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                            |                  |                                |                        |                                  |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Remarks:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <u></u>                    |                  |                                |                        |                                  |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                            |                  |                                |                        |                                  |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Conducted ber                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 1 10-0                     | Ot               | V                              |                        |                                  |         | 110                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Conducted by:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | - 7                        | Signature:       | Kwa                            |                        |                                  | Date:   | 2111116                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Checked by:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                            | Signature:       |                                | 72                     |                                  | Date: C | 21 November de                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |



| Date:   20-Jan-17   Next Due Date:   19-Mar-17     Equipment No.:   A-01-59   Serial No.   2354                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                          |                  |                                   |                                           |                   | File No                     | MA14008/59/0040                                                                                                 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|-----------------------------------|-------------------------------------------|-------------------|-----------------------------|-----------------------------------------------------------------------------------------------------------------|
| Equipment No.:   A-01-59   Serial No.   2354                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Station                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | AM2 - Lee Kau            | Yan Memorial S   | School                            | Operator:                                 | WK                | _                           |                                                                                                                 |
| Ambient Condition   Temperature, Ta (K)   287.8   Pressure, Pa (mmHg)   770.6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Date:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | ate: 20-Jan-17           |                  | _                                 | Vext Due Date:                            | 19-Mar            | ·-17                        |                                                                                                                 |
| Calibration Date:   A-Mar-16   Serial No.:   2896   Slope, mc (CPM)   0.0598   Intercept, be   -0.05079                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Equipment No.: A-01-59                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                          |                  | Serial No.                        | 2354                                      |                   |                             |                                                                                                                 |
| Calibration Date:   A-Mar-16   Serial No.:   2896   Slope, mc (CPM)   0.0598   Intercept, be   -0.05079                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | (1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - 1.5 - |                          |                  | Ambient (                         | Condition                                 |                   |                             |                                                                                                                 |
| Serial No.:   2896   Slope, mc (CFM)   0.0598   Intercept, be   -0.05079                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Temperati                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | re Ta(K)                 | 287.8            |                                   |                                           |                   | 770.6                       | Bearing grant person on the second |
| Serial No.:   2896   Slope, me (CFM)   0.0598   Intercept, be   -0.05079                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 1 on pour                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 10, 10 (11)              | 207.0            | 11000010,14                       | (mm15)                                    |                   | 770.0                       |                                                                                                                 |
| Last Calibration   Date:   4-Mar-16   Next Calibration   Date:   3-Mar-17   Qstd = {[AH x (Pa7760) x (298/Ta)]^{1/2} -bc} / mc                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                          | 0                | rifice Transfer Sta               | ndard Inform                              | ıation            |                             |                                                                                                                 |
| Next Calibration Date:   3-Mar-17   Qstd = {[AH x (Pa/760) x (298/Ta)]^{1/2} -bc} / mc                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Seria                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | l No.:                   | 2896             | Slope, mc (CFM)                   | 0.0598                                    | Intercep          | t, bc                       | -0.05079                                                                                                        |
| Calibration of TSP Samplet   Calibration   Orfice                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Last Calibr                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | ration Date:             | 4-Mar-16         |                                   |                                           | J <sup>1/2</sup>  |                             |                                                                                                                 |
| Calibration of TSP Samplet   Calibration   Orfice                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Next Calibi                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | ration Date:             | 3-Mar-17         |                                   | $\mathbf{Qstd} = \{ [\Delta \mathbf{H} :$ | x (Pa/760) x (298 | /Ta)] <sup>1/2</sup> -bc} / | me                                                                                                              |
| Calibration Point   AH (orifice), in. of water   [AH x (Pa/760) x (298/Ta)]   V   Qstd (CFM)   X - axis   of water   axis   [AW x (Pa/760) x (298/Ta)]   V   Ax - axis   of water   axis   Ax - axis   Ax                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                          | •                |                                   |                                           |                   |                             |                                                                                                                 |
| Calibration   Point   AH (orifice)   in. of water   [AH x (Pa/760) x (298/Ta)]   Qstd (CFM)   X - axis   AW (HVS), in. of water   axis                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                          |                  | Calibration of                    | TSP Sampler                               |                   |                             |                                                                                                                 |
| Point $AH (orifice), in. of water axis   1   11.7   3.50   59.47   7.6   2.82   2   9.8   3.21   54.50   6.5   2.61   3   7.5   2.81   47.78   5.1   2.31   3.4   5.0   2.29   39.17   3.2   1.83   5   3.4   1.89   32.45   2.3   1.55      By Linear Regression of Y on X   Slope, nw = 0.0480   Intercept, bw: -0.0147   -0.0147    Correlation Coefficient* = 0.9988   **If Correlation Coefficient < 0.990, check and recalibrate.  Set Point Calculation   From the Regression Equation, the "Y" value according to mw x Qstd + bw =  \Delta W \times (Pa/760) \times (298/Ta) ^{1/2}  Therefore, Set Point; W = (mw \times Qstd + bw)^2 \times (760/Pa) \times (Ta/298) = 4.01  Remarks:  \Delta W \times (Pa/760) \times (298/Ta) ^{1/2}  Conducted by:  \omega K  ^{7an}3   Signature:  \omega K  ^{7an}3   Signature:  \omega K  ^{7an}3   Date:  \omega K  ^{7an}3   Date:  \omega K  ^{7an}3   Signature:  \omega K  ^{7an}3   Signature: $                                                                                                                                                                     | Calibration                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                          | Oı               | rfice                             | HVS                                       |                   |                             |                                                                                                                 |
| 2 9.8 3.21 54.50 6.5 2.61 3 7.5 2.81 47.78 5.1 2.31 4 5.0 2.29 39.17 3.2 1.83 5 3.4 1.89 32.45 2.3 1.55  By Linear Regression of Y on X Slope, mw = 0.0480 Intercept, bw :                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | , ,                      | [ΔH x (Pa/76     | 60) x (298/Ta)] <sup>1/2</sup>    |                                           | 1                 | [ΔW x (Pa/76                | , ` , <u>, -</u>                                                                                                |
| 3 7.5 2.81 47.78 5.1 2.31 4 5.0 2.29 39.17 3.2 1.83 5 3.4 1.89 32.45 2.3 1.55  By Linear Regression of Y on X  Slope, mw =                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 11.7                     |                  | 3.50                              | 59.47                                     | 7.6               |                             | 2.82                                                                                                            |
| 4   5.0   2.29   39.17   3.2   1.83     5   3.4   1.89   32.45   2.3   1.55     By Linear Regression of Y on X     Slope , mw =   0.0480   Intercept, bw :   -0.0147     Correlation coefficient =   0.9988    *If Correlation Coefficient < 0.990, check and recalibrate.    Set Point Calculation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 9.8                      |                  | 3.21                              | 54.50                                     | 6.5               |                             | 2.61                                                                                                            |
| Set Point; W = (mw x Qstd + bw) <sup>2</sup> x (760/Pa) x (Ta/298) =   4.01                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 7.5                      |                  | 2.81                              | 47.78                                     | 5.1               |                             | 2.31                                                                                                            |
| By Linear Regression of Y on X  Slope, mw =                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 5.0                      |                  | 2.29                              | 39.17                                     | 3.2               |                             | 1.83                                                                                                            |
| By Linear Regression of Y on X  Slope, nw =                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 3.4                      |                  | 1.89                              | 32.45                                     | 2.3               |                             | 1.55                                                                                                            |
| Set Point Calculation  From the TSP Field Calibration Curve, take Qstd = 43 CFM  From the Regression Equation, the "Y" value according to  mw x Qstd + bw = [\Delta W x (Pa/760) x (298/Ta)]^{1/2}  Therefore, Set Point; W = (mw x Qstd + bw)^2 x (760 / Pa) x (Ta / 298) = 4.01  Remarks:  Conducted by: \textit{wk Tanz} \text{ Signature:} \text{ Wain } \text{ Date: } \text{ 201,12517}                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Slope , mw = Correlation o                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 0.0480<br>coefficient* = | 0.5              | 9988                              | Intercept, bw                             | -0.014            | 17                          |                                                                                                                 |
| From the TSP Field Calibration Curve, take Qstd = 43 CFM  From the Regression Equation, the "Y" value according to  mw x Qstd + bw = [\Delta W x (Pa/760) x (298/Ta)]^{1/2}  Therefore, Set Point; W = (mw x Qstd + bw)^2 x (760 / Pa) x (Ta / 298) = 4.01  Remarks:  Conducted by: \textit{Wk Tang} \text{ Signature:} \text{ War} \text{ Date: }  201 [12217]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | *If Correlation (                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Coefficient < 0.99       | 0, check and rec | calibrate.                        |                                           |                   |                             |                                                                                                                 |
| From the Regression Equation, the "Y" value according to $\mathbf{mw} \times \mathbf{Qstd} + \mathbf{bw} = \left[\Delta \mathbf{W} \times (\mathbf{Pa/760}) \times (298/\mathbf{Ta})\right]^{1/2}$ Therefore, Set Point; $\mathbf{W} = (\mathbf{mw} \times \mathbf{Qstd} + \mathbf{bw})^2 \times (760/\mathbf{Pa}) \times (\mathbf{Ta/298}) = 4.01$ Remarks:  Conducted by: $\mathbf{wk} \times \mathbf{Tang}$ Signature:  Date: $\mathbf{Zol_1/2217}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                          |                  | Set Point C                       | alculation                                |                   |                             |                                                                                                                 |
| $mw \times Qstd + bw = [\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$ Therefore, Set Point; W = $(mw \times Qstd + bw)^2 \times (760/Pa) \times (Ta/298) = 4.01$ Remarks:  Conducted by: $wk \text{ Tang}$ Signature: $wk \text{ Tang}$ Si | From the TSP Fi                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | ield Calibration C       | urve, take Qstd  | = 43 CFM                          |                                           |                   |                             |                                                                                                                 |
| Therefore, Set Point; W = (mw x Qstd + bw) <sup>2</sup> x (760 / Pa) x (Ta / 298) = 4.01  Remarks:  Conducted by: wk 7ang Signature: kwa   Date: 20/1/2017                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | From the Regres                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | ssion Equation, the      | e "Y" value acco | ording to                         |                                           |                   |                             |                                                                                                                 |
| Therefore, Set Point; W = (mw x Qstd + bw) <sup>2</sup> x (760 / Pa) x (Ta / 298) = 4.01  Remarks:  Conducted by: wk 7ang Signature: kwa   Date: 20/1/2017                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                          |                  |                                   |                                           | . 1/2             |                             |                                                                                                                 |
| Remarks:  Conducted by: WK Tang Signature: Kwai Date: 20/1/2017                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                          | mw x             | $Qstd + bw = [\Delta W]$          | x (Pa/760) x (2                           | 98/Ta)]***        |                             |                                                                                                                 |
| Conducted by: wk. Tanz Signature: Kwai Date: 20/1/2017                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Therefore, S                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | et Point; W = ( m        | w x Qstd + bw)   | <sup>2</sup> x ( 760 / Pa ) x ( T | Ca / 298)=                                | 4.01              |                             |                                                                                                                 |
| Conducted by: wk. Tanz Signature: Kwai Date: 20/1/2017                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                          |                  |                                   |                                           |                   |                             |                                                                                                                 |
| Conducted by: wk. Tanz Signature: Kwai Date: 20/1/2017                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                          |                  |                                   |                                           |                   |                             |                                                                                                                 |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Remarks:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                          |                  |                                   |                                           |                   |                             |                                                                                                                 |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                          |                  |                                   |                                           |                   |                             |                                                                                                                 |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                          |                  | -                                 | 1                                         |                   |                             |                                                                                                                 |
| Checked by: / Signature: Date: 20 January 201                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Conducted by:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | wk Tang                  | Signature:       | Kwa                               | <u> </u>                                  |                   | Date:                       | 20/1/2017                                                                                                       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Checked by:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                          | Signature:       |                                   | $\chi$                                    |                   | Date:                       | 20 January dol:                                                                                                 |



TISCH ENVIRONMENTAL, INC. 145 SOUTH MIAMI AVE VILLAGE OF CLEVES, OH 45002 513.467.9000 877.263.7610 TOLL FREE 513.467.9009 FAX

## ORIFICE TRANSFER STANDARD CERTIFICATION WORKSHEET TE-5025A

| Date - Mar 04, 2016 Rootsmeter S/N 0438320 Ta (K) - 295<br>Operator Tisch Orifice I.D 2896 Pa (mm) - 755.65 |                         |                            |                              |                                                |                                  |                                      |
|-------------------------------------------------------------------------------------------------------------|-------------------------|----------------------------|------------------------------|------------------------------------------------|----------------------------------|--------------------------------------|
| PLATE<br>OR<br>Run #                                                                                        | VOLUME<br>START<br>(m3) | VOLUME<br>STOP<br>(m3)     | DIFF<br>VOLUME<br>(m3)       | DIFF<br>TIME<br>(min)                          | METER DIFF Hg (mm)               | ORFICE<br>DIFF<br>H2O<br>(in.)       |
| 1<br>2<br>3<br>4<br>5                                                                                       | NA<br>NA<br>NA<br>NA    | NA<br>NA<br>NA<br>NA<br>NA | 1.00<br>1.00<br>1.00<br>1.00 | 1.4340<br>1.0250<br>0.9150<br>0.8770<br>0.7210 | 3.2<br>6.4<br>7.9<br>8.7<br>12.7 | 2.00<br>4.00<br>5.00<br>5.50<br>8.00 |

#### DATA TABULATION

| Vstd                                           | (x axis)<br>Qstd                               | (y axis)                                       |      | Va                                             | (x axis)<br>Qa                                 | (y axis)                                       |
|------------------------------------------------|------------------------------------------------|------------------------------------------------|------|------------------------------------------------|------------------------------------------------|------------------------------------------------|
| 1.0001<br>0.9959<br>0.9938<br>0.9928<br>0.9875 | 0.6974<br>0.9716<br>1.0861<br>1.1320<br>1.3696 | 1.4173<br>2.0044<br>2.2410<br>2.3503<br>2.8346 |      | 0.9957<br>0.9915<br>0.9894<br>0.9885<br>0.9831 | 0.6944<br>0.9674<br>1.0814<br>1.1271<br>1.3636 | 0.8836<br>1.2496<br>1.3971<br>1.4653<br>1.7672 |
| Qstd slop                                      | (b) = 1                                        | 2.11176<br>-0.05079<br>0.99982                 |      | Qa slope<br>intercept<br>coefficie             | = (b) $=$                                      | 1.32235<br>-0.03166<br>0.99982                 |
| y = SQRT[H20(Pa/760)(298/Ta)]                  |                                                |                                                | [a)] | y axis =                                       | SQRT [H20 (T                                   | :<br>:a/Pa)]                                   |

## CALCULATIONS

Vstd = Diff. Vol[(Pa-Diff. Hg)/760](298/Ta)
Qstd = Vstd/Time

Va = Diff Vol [(Pa-Diff Hg)/Pa]
Qa = Va/Time

For subsequent flow rate calculations:

Qstd =  $1/m\{[SQRT(H2O(Pa/760)(298/Ta))] - b\}$ Qa =  $1/m\{[SQRT H2O(Ta/Pa)] - b\}$ 



WELLAB LIMITED

Rms 1516, 1701 & 1716, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong. Tel: 2898 7388 Fax: 2898 7076

Website: www.wellab.com.hk

#### TEST REPORT

APPLICANT: Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Test Report No.: C/160820 Date of Issue: 2016-08-20

Date Received: 2016-08-20

Date Tested: 2016-08-20

Date Completed: 2016-08-20

Next Due Date: 2017-02-19

Page: 1 of 2

ATTN:

Miss Mei Ling Tang

#### **Certificate of Calibration**

#### Item for calibration:

Description

: Weather Monitor II

Manufacturer

: Davis Instruments

Model No.

: 7440

Serial No.

: MC01010A44

#### Test conditions:

Room Temperature

: 24 degree Celsius

Relative Humidity

: 56 %

#### **Test Specifications:**

- 1. Performance check of anemometer
- 2. Performance check of wind direction sensor

#### Methodology:

In-house method with reference anemometer (RS232 Integral Vane Digital Anemometer)

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE

Laboratory Manager



### **TEST REPORT**

Test Report No.: C/160820

Date of Issue: 2016-08-20

Date Received: 2016-08-20

Date Tested: 2016-08-20

Date Completed: 2016-08-20

Next Due Date: 2017-02-19

Page:

2 of 2

#### **Results:**

#### 1. Performance check of anemometer

| Air Velo                | Difference D (m/s)   |             |
|-------------------------|----------------------|-------------|
| Instrument Reading (V1) | Reference Value (V1) | D = V1 - V2 |
| 2.00                    | 2.00                 | 0.00        |

#### 2. Performance check of wind direction sensor

| Wind Dire               | Difference D (°)     |             |  |
|-------------------------|----------------------|-------------|--|
| Instrument Reading (W1) | Reference Value (W2) | D = W1 - W2 |  |
| 0                       | 0                    | 0           |  |
| 45.2                    | 45                   | 0.2         |  |
| 90.1                    | 90                   | 0.1         |  |
| 134.8                   | 135                  | -0.2        |  |
| 180.3                   | 180                  | 0.3         |  |
| 225.1                   | 225                  | 0.1         |  |
| 270.2                   | 270                  | 0.2         |  |
| 315.1                   | 315                  | 0.1         |  |
| 360                     | 360                  | 0           |  |



WELLAB LIMITED

Rms 1516, 1701 & 1716, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong. Tel: 2898 7388 Fax: 2898 7076 Website: www.wellab.com.hk

#### TEST REPORT

APPLICANT: Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

 Test Report No.:
 C/A/170106A

 Date of Issue:
 2017-01-09

 Date Received:
 2017-01-06

 Date Tested:
 2017-01-06

 Date Completed:
 2017-01-09

 Next Due Date:
 2017-03-08

ATTN:

Mr. W. K. Tang

Page:

1 of 1

### **Certificate of Calibration**

#### Item for Calibration:

Description

: Laser Dust Monitor

Manufacturer

: Sibata

Model No.

: LD-3

Serial No.

: 251634

Sensitivity (K) 1 CPM

 $: 0.001 \text{ mg/m}^3$ 

Sen. Adjustment Scale Setting

: 550 CPM

Equipment No.

: A-02-01

**Test Conditions:** 

Room Temperature

: 22 degree Celsius

Relative Humidity

: 63 %

#### Test Specifications & Methodology:

1. Instruction and Operation Manual High Volume Sampler, Andersen Samplers, Inc.

\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*

2. In-house method in according to the instruction manual: The Laser Dust Monitor was compared with a calibrated High Volume Sampler and the result was used to generate the Correlation Factor (CF) between the Laser Dust Monitor and High Volume Sampler.

#### Results:

Correlation Factor (CF)

0.0037

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE

Laboratory Manager



WELLAB LIMITED

Rms 1516, 1701 & 1716, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong. Tel: 2898 7388 Fax: 2898 7076

Website: www.wellab.com.hk

## TEST REPORT

**Cinotech Consultants Limited** APPLICANT:

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Test Report No.: C/A/161104A Date of Issue: 2016-11-07 Date Received: 2016-11-04 Date Tested: 2016-11-04 Date Completed: 2016-11-07 Next Due Date: 2017-01-06

ATTN:

Mr. W. K. Tang

Page:

1 of 1

### Certificate of Calibration

#### Item for Calibration:

Description : Laser Dust Monitor

Manufacturer : Sibata Model No. : LD-3B : 853944 Serial No. Sensitivity (K) 1 CPM  $: 0.001 \text{ mg/m}^3$ : 685 CPM Sen. Adjustment Scale Setting Equipment No. : A-02-04

**Test Conditions:** 

: 22 degree Celsius Room Temperature

Relative Humidity : 61 %

#### Test Specifications & Methodology:

- 1. Instruction and Operation Manual High Volume Sampler, Andersen Samplers, Inc.
- 2. In-house method in according to the instruction manual: The Laser Dust Monitor was compared with a calibrated High Volume Sampler and the result was used to generate the Correlation Factor (CF) between the Laser Dust Monitor and High Volume Sampler.

#### Results:

|                          | <b>,</b>    |
|--------------------------|-------------|
| Completion Footon (CE)   | 0.0024      |
| Correlation Factor (CF)  | 1 11/1/1/14 |
| Correlation & detax (Cx) | 0.0051      |
|                          |             |

\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.



WELLAB LIMITED Rms 1516, 1701 & 1716, Technology Park,

18 On Lai Street, Shatin, N.T., Hong Kong. Tel: 2898 7388 Fax: 2898 7076

Website: www.wellab.com.hk

#### TEST REPORT

APPLICANT: Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Test Report No.: C/A/170106B

Date of Issue: 2017-01-09

Date Received: 2017-01-06

Date Received: 2017-01-06

Date Tested: 2017-01-06

Date Completed: 2017-01-09 Next Due Date: 2017-03-08

ATTN:

Mr. W. K. Tang

Page:

1 of 1

## **Certificate of Calibration**

#### Item for Calibration:

Description

: Laser Dust Monitor

Manufacturer

: Sibata

Model No.

: LD-3B

Serial No.

: 853944

Sensitivity (K) 1 CPM

: 0.001 mg/m<sup>3</sup>

Sen. Adjustment Scale Setting

: 685 CPM

Equipment No.

: A-02-04

**Test Conditions:** 

Room Temperature

: 22 degree Celsius

Relative Humidity

: 63 %

### Test Specifications & Methodology:

- 1. Instruction and Operation Manual High Volume Sampler, Andersen Samplers, Inc.
- 2. In-house method in according to the instruction manual: The Laser Dust Monitor was compared with a calibrated High Volume Sampler and the result was used to generate the Correlation Factor (CF) between the Laser Dust Monitor and High Volume Sampler.

### Results:

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE



WELLAB LIMITED

Rms 1516, 1701 & 1716, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong. Tel: 2898 7388 Fax: 2898 7076 Website: www.wellab.com.hk

### TEST REPORT

**Cinotech Consultants Limited** APPLICANT:

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

C/A/170106C Test Report No.: Date of Issue: 2017-01-09 2017-01-06 Date Received: Date Tested: 2017-01-06 2017-01-09 Date Completed:

Page:

Next Due Date: 2017-03-08 1 of 1

ATTN:

Mr. W. K. Tang

### **Certificate of Calibration**

#### Item for Calibration:

Description

: Laser Dust Monitor

Manufacturer

: Sibata

Model No.

: LD-3B

Serial No.

: 014750

Sensitivity (K) 1 CPM

 $: 0.001 \text{ mg/m}^3$ 

Sen. Adjustment Scale Setting

: 790 CPM

Equipment No.

: A-02-06

**Test Conditions:** 

Room Temperature

: 22 degree Celsius

Relative Humidity

: 63 %

## Test Specifications & Methodology:

- 1. Instruction and Operation Manual High Volume Sampler, Andersen Samplers, Inc.
- 2. In-house method in according to the instruction manual: The Laser Dust Monitor was compared with a calibrated High Volume Sampler and the result was used to generate the Correlation Factor (CF) between the Laser Dust Monitor and High Volume Sampler.

#### Results:

| ACSULS.                 |        |
|-------------------------|--------|
| Correlation Factor (CF) | 0.0035 |

\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.



WELLAB LIMITED

Rms 1516, 1701 & 1716, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong. Tel: 2898 7388 Fax: 2898 7076 Website: www.wellab.com.hk

#### TEST REPORT

APPLICANT:

**Cinotech Consultants Limited** 

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Test Report No.: Date of Issue: Date Received:

C/A/161104C 2016-11-07

Date Tested:

2016-11-04 2016-11-04

Date Completed:

2016-11-07

Next Due Date:

2017-01-06

ATTN:

Mr. W. K. Tang

Page:

1 of 1

### **Certificate of Calibration**

#### Item for Calibration:

Description

: Laser Dust Monitor

Manufacturer

: Sibata

Model No.

: LD-3B

Serial No.

: 541146

Sensitivity (K) 1 CPM

 $: 0.001 \text{ mg/m}^3$ 

Sen. Adjustment Scale Setting

: 625 CPM

Equipment No.

: A-02-07

**Test Conditions:** 

Room Temperature

: 22 degree Celsius

Relative Humidity

: 61 %

# Test Specifications & Methodology:

- 1. Instruction and Operation Manual High Volume Sampler, Andersen Samplers, Inc.
- 2. In-house method in according to the instruction manual: The Laser Dust Monitor was compared with a calibrated High Volume Sampler and the result was used to generate the Correlation Factor (CF) between the Laser Dust Monitor and High Volume Sampler.

\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*


#### Results:

Correlation Factor (CF)

0.0031

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.





### TEST REPORT

APPLICANT: Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Test Report No.: C/A/170106
Date of Issue: 2017-01-09
Date Received: 2017-01-06
Date Tested: 2017-01-06
Date Completed: 2017-01-09
Next Due Date: 2017-03-08

ATTN:

Mr. W. K. Tang

Page:

: Laser Dust Monitor

1 of 1

## **Certificate of Calibration**

#### Item for Calibration:

Description

Manufacturer : Sibata
Model No. : LD-3B
Serial No. : 541146

Sensitivity (K) 1 CPM : 0.001 mg/m<sup>3</sup>
Sen. Adjustment Scale Setting : 625 CPM
Equipment No. : A-02-07

**Test Conditions:** 

Room Temperature : 22 degree Celsius

Relative Humidity : 63 %

#### Test Specifications & Methodology:

- 1. Instruction and Operation Manual High Volume Sampler, Andersen Samplers, Inc.
- 2. In-house method in according to the instruction manual: The Laser Dust Monitor was compared with a calibrated High Volume Sampler and the result was used to generate the Correlation Factor (CF) between the Laser Dust Monitor and High Volume Sampler.

#### Results:

| Correlation Factor (CF) | 0.0033 |
|-------------------------|--------|
|                         |        |

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

**#ATRICK TSE**Laboratory Manager



WELLAB LIMITED

Rms 1516, 1701 & 1716, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong. Tel: 2898 7388 Fax: 2898 7076 Website: www.wellab.com.hk

#### TEST REPORT

APPLICANT: Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Test Report No.: C/161230
Date of Issue: 2017-01-03
Date Received: 2016-12-30
Date Tested: 2016-12-30
Date Completed: 2017-01-03
Next Due Date: 2017-03-02

ATTN:

Mr. W. K. Tang

Page:

1 of 1

## **Certificate of Calibration**

#### Item for Calibration:

Description

: Laser Dust Monitor

Manufacturer

: Sibata

Model No.

: LD-3B

Serial No.

: 095029

Sensitivity (K) 1 CPM

: 0.001 mg/m<sup>3</sup>

Sen. Adjustment Scale Setting

: 551 CPM

Equipment No.

: A-02-10

#### **Test Conditions:**

Room Temperature

: 22 degree Celsius

Relative Humidity

: 66 %

#### Test Specifications & Methodology:

- 1. Instruction and Operation Manual High Volume Sampler, Andersen Samplers, Inc.
- 2. In-house method in according to the instruction manual: The Laser Dust Monitor was compared with a calibrated High Volume Sampler and the result was used to generate the Correlation Factor (CF) between the Laser Dust Monitor and High Volume Sampler.


### Results:

Correlation Factor (CF) 0.0038

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE





### TEST REPORT

APPLICANT: Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Test Report No.: C/161230D
Date of Issue: 2017-01-03
Date Received: 2016-12-30
Date Tested: 2016-12-30

Date Completed: 2017-01-03

Next Due Date: 2017-03-02

ATTN:

Mr. W. K. Tang

Page:

1 of 1

## **Certificate of Calibration**

#### Item for Calibration:

Description

: Dust Monitor

Manufacturer

: Met One Instruments

Model No.

: AEROCET-531

Serial No.

: N6734

Flow rate

:0.1 cfm

Zero Count Test

:0 mg (The result of the 2-minute sample)

Equipment No.

: A-02-13

#### **Test Conditions:**

Room Temperature

: 22 degree Celsius

Relative Humidity

: 66 %

### Test Specifications & Methodology:

- 1. Instruction and Operation Manual High Volume Sampler, Andersen Samplers, Inc.
- 2. In-house method in according to the instruction manual: The Dust Monitor was compared with a calibrated High Volume Sampler and the result was used to generate the Correlation Factor (CF) between the Dust Monitor and High Volume Sampler.

#### Results:

| Correlation Factor (CF) | 1.183 |
|-------------------------|-------|
|                         |       |

\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE





#### TEST REPORT

APPLICANT: Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

 Test Report No.:
 C/N/160917B

 Date of Issue:
 2016-09-19

 Date Received:
 2016-09-17

 Date Tested:
 2016-09-17

 Date Completed:
 2016-09-19

 Next Due Date:
 2017-09-18

ATTN:

Mr. W.K. Tang

Page:

1 of 1

## **Certificate of Calibration**

#### Item for calibration:

Description

: 'SVANTEK' Integrating Sound Level Meter

Manufacturer

: SVANTEK

Model No.

: SVAN 955

Serial No.

: 12553

Microphone No.

: 35222

Equipment No.

: N-08-02

#### **Test conditions:**

Room Temperatre

: 24 degree Celsius

Relative Humidity

: 57%

### **Test Specifications:**

Performance checking at 94 and 114 dB

#### Methodology:

In-house method, according to manufacturer instruction manual

#### Results:

| Reference Set Point, dB | Instrument Readings, dB |
|-------------------------|-------------------------|
| 94                      | 94.0                    |
| 114                     | 114.0                   |

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE
Laboratory Manager





### TEST REPORT

APPLICANT: Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Test Report No.: C/N/160917C
Date of Issue: 2016-09-19
Date Received: 2016-09-17
Date Tested: 2016-09-17
Date Completed: 2016-09-19
Next Due Date: 2017-09-18

ATTN:

Mr. W.K. Tang

Page:

1 of 1

## **Certificate of Calibration**

#### Item for calibration:

Description : 'SVANTEK' Integrating Sound Level Meter

Manufacturer : SVANTEK
Model No. : SVAN 955
Serial No. : 12563
Microphone No. : 34377
Equipment No. : N-08-03

**Test conditions:** 

Room Temperatre : 24 degree Celsius

Relative Humidity : 57%

#### **Test Specifications:**

Performance checking at 94 and 114 dB

## Methodology:

In-house method, according to manufacturer instruction manual

## **Results:**

| Reference Set Point, dB | Instrument Readings, dB |
|-------------------------|-------------------------|
| 94                      | 94.0                    |
| 114                     | 114.0                   |

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE



WELLAB LIMITED
Rms 816, 1516 & 1701, Technology Park,
18 On Lai Street, Shatin, N.T. Hong Kong.

Tel: 2898 7388 Fax: 2898 7076 Website: www.wellab.com.hk

## TEST REPORT

APPLICANT: Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Test Report No.: C/N/160826A
Date of Issue: 2016-08-29
Date Received: 2016-08-26

Date Tested: 2016-08-26 Date Completed: 2016-08-29

Next Due Date: 2017-08-28

ATTN:

Mr. W.K. Tang

Page:

1 of 1

## **Certificate of Calibration**

#### Item for calibration:

Description

: 'SVANTEK' Integrating Sound Level Meter

Manufacturer

: SVANTEK

Model No.

: SVAN 957

Serial No.

: 21455

Microphone No.

: 43730

Equipment No.

: N-08-07

#### **Test conditions:**

Room Temperatre

: 25 degree Celsius

Relative Humidity

: 57%

#### **Test Specifications:**

Performance checking at 94 and 114 dB

### Methodology:

In-house method, according to manufacturer instruction manual


#### Results:

| Reference Set Point, dB | Instrument Readings, dB |
|-------------------------|-------------------------|
| 94                      | 94.0                    |
| 114                     | 114.0                   |

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE
Laboratory Manager





#### TEST REPORT

APPLICANT:

**Cinotech Consultants Limited** 

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

| Test Report No.: | C/N/160819B |
|------------------|-------------|
| Date of Issue:   | 2016-08-22  |
| Date Received:   | 2016-08-19  |
| Date Tested:     | 2016-08-19  |
| Date Completed:  | 2016-08-22  |
| Next Due Date:   | 2017-08-21  |

ATTN:

Mr. W.K. Tang

Page:

1 of 1

# **Certificate of Calibration**

#### Item for calibration:

Description

: 'SVANTEK' Integrating Sound Level Meter

Manufacturer

: SVANTEK

Model No. Serial No. : SVAN 957 : 21459

Microphone No. Equipment No.

: 43676 : N-08-08

#### Test conditions:

Room Temperatre

: 24 degree Celsius

Relative Humidity

: 58%

#### **Test Specifications:**

Performance checking at 94 and 114 dB

## Methodology:

In-house method, according to manufacturer instruction manual

#### Results:

| Reference Set Point, dB | Instrument Readings, dB |
|-------------------------|-------------------------|
| 94                      | 94.0                    |
| 114                     | 114.0                   |

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE Laboratory Manager





### TEST REPORT

APPLICANT:

**Cinotech Consultants Limited** 

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

 Test Report No.:
 C/N/160819C

 Date of Issue:
 2016-08-22

 Date Received:
 2016-08-19

 Date Tested:
 2016-08-19

 Date Completed:
 2016-08-22

 Next Due Date:
 2017-08-21

ATTN:

Mr. W.K. Tang

Page:

1 of 1

## **Certificate of Calibration**

#### Item for calibration:

Description

: 'SVANTEK' Integrating Sound Level Meter

Manufacturer Model No.

: SVANTEK : SVAN 957

Serial No.
Microphone No.

: 21460 : 43679

Equipment No.

: N-08-09

#### **Test conditions:**

Room Temperatre

: 24 degree Celsius

Relative Humidity

: 58%

### **Test Specifications:**

Performance checking at 94 and 114 dB

#### Methodology:

In-house method, according to manufacturer instruction manual

#### Results:

| Reference Set Point, dB | Instrument Readings, dB |
|-------------------------|-------------------------|
| 94                      | 94.0                    |
| 114                     | 114.0                   |

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE



## TEST REPORT

**Cinotech Consultants Limited** APPLICANT:

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Test Report No.: C/N/161128 Date of Issue: 2016-11-30 Date Received: 2016-11-28 Date Tested: 2016-11-28 Date Completed: 2016-11-30

Next Due Date:

2017-11-29

ATTN:

Mr. W.K. Tang

Page:

1 of 1

## **Certificate of Calibration**

#### Item for calibration:

Description

: 'SVANTEK' Integrating Sound Level Meter

Manufacturer : SVANTEK Model No. : SVAN 957 Serial No. : 23853 Microphone No. : 48530

Equipment No.

: N-08-10

#### **Test conditions:**

Room Temperatre

: 21 degree Celsius

Relative Humidity

: 66%

#### **Test Specifications:**

Performance checking at 94 and 114 dB

### Methodology:

In-house method, according to manufacturer instruction manual


#### Results:

| Reference Set Point, dB | Instrument Readings, dB |
|-------------------------|-------------------------|
| 94                      | 94.0                    |
| 114                     | 114.0                   |

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE Laboratory Manager





## TEST REPORT

APPLICANT: Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

| Test Report No.: | C/N/160930A |
|------------------|-------------|
| Date of Issue:   | 2016-10-03  |
| Date Received:   | 2016-09-30  |
| Date Tested:     | 2016-09-30  |
| Date Completed:  | 2016-10-03  |
| Next Due Date:   | 2017-10-02  |

ATTN:

Mr. W.K. Tang

Page:

1 of 1

#### Item for calibration:

Description

: Acoustical Calibrator

Manufacturer Model No.

: SVANTEK : SV30A

Serial No.

: 24803

Equipment No.

: N-09-03

#### Test conditions:

Room Temperatre

: 25 degree Celsius

Relative Humidity

: 60%

#### Methodology:

The Sound Level Calibrator has been calibrated in accordance with the documented procedures and using standard(s) and instrument(s) which are recommended by the manufacturer, or equivalent.

#### **Results:**

| Sound Pressure Level (1kHz) | Measured SPL | Tolerance      |
|-----------------------------|--------------|----------------|
| At 94 dB SPL                | 94.0         | 94.0 ± 0.1 dB  |
| At 114 dB SPL               | 114.0        | 114.0 ± 0.1 dB |

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE





## TEST REPORT

APPLICANT:

**Cinotech Consultants Limited** 

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

| Test Report No.: | C/N/160930B |
|------------------|-------------|
| Date of Issue:   | 2016-10-03  |
| Date Received:   | 2016-09-30  |
| Date Tested:     | 2016-09-30  |
| Date Completed:  | 2016-10-03  |
| Next Due Date:   | 2017-10-02  |

ATTN:

Mr. W.K. Tang

Page:

1 of 1

#### Item for calibration:

Description

: Acoustical Calibrator

Manufacturer

: SVANTEK : SV30A

Model No. Serial No.

: 24791

Equipment No.

: N-09-04

#### Test conditions:

Room Temperatre

: 25 degree Celsius

Relative Humidity

:60%

## Methodology:

The Sound Level Calibrator has been calibrated in accordance with the documented procedures and using standard(s) and instrument(s) which are recommended by the manufacturer, or equivalent.

#### **Results:**

| Sound Pressure Level (1kHz) | Measured SPL | Tolerance      |
|-----------------------------|--------------|----------------|
| At 94 dB SPL                | 94.0         | 94.0 ± 0.1 dB  |
| At 114 dB SPL               | 114.0        | 114.0 ± 0.1 dB |

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

RATRICK TSE



WELLAB LIMITED Rms 1516, 1701 & 1716, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong. Tel: 2898 7388 Fax: 2898 7076

Website: www.wellab.com.hk

## TEST REPORT

APPLICANT:

Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

| -                |             |
|------------------|-------------|
| Test Report No.: | C/N/160930C |
| Date of Issue:   | 2016-10-03  |
| Date Received:   | 2016-09-30  |
| Date Tested:     | 2016-09-30  |
| Date Completed:  | 2016-10-03  |
| Next Due Date:   | 2017-10-02  |

ATTN:

Mr. W.K. Tang

Page:

1 of 1

#### Item for calibration:

Description

: Acoustical Calibrator

Manufacturer

: SVANTEK

Model No.

: SV30A

Serial No.

: 24780

Equipment No.

: N-09-05

#### Test conditions:

Room Temperatre

: 25 degree Celsius

Relative Humidity

: 60%

## Methodology:

The Sound Level Calibrator has been calibrated in accordance with the documented procedures and using standard(s) and instrument(s) which are recommended by the manufacturer, or equivalent.

#### **Results:**

| Sound Pressure Level (1kHz) | Measured SPL | Tolerance      |
|-----------------------------|--------------|----------------|
| At 94 dB SPL                | 94.0         | 94.0 ± 0.1 dB  |
| At 114 dB SPL               | 114.0        | 114.0 ± 0.1 dB |

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE



## TEST REPORT

APPLICANT:

Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Test Report No.: C/N/161104/1
Date of Issue: 2016-11-07
Date Received: 2016-11-04
Date Tested: 2016-11-04
Date Completed: 2016-11-07
Next Due Date: 2017-11-06

ATTN:

Mr. W.K. Tang

Page:

1 of 1

#### Item for calibration:

Description

: Acoustical Calibrator

Manufacturer

: Brüel & Kjær

Model No.

: 4231

Serial No.

: 2326353

Equipment No.

: N-02-01

#### Test conditions:

Room Temperatre

: 21 degree Celsius

Relative Humidity

: 62 %

## Methodology:

The sound calibrator has been calibrated in accordance with the documented procedures and using standard(s) and instrument(s) which are recommended by the manufacturer, or equivalent.

#### Results:

| Sound Pressure Level (1kHz) | Measured SPL | Tolerance      |
|-----------------------------|--------------|----------------|
| At 94 dB SPL                | 94.0         | 94.0 ± 0.1 dB  |
| At 114 dB SPL               | 114.0        | 114.0 ± 0.1 dB |

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE Laboratory Manager

This report may not be reproduced except with prior written approval from WELLAB LIMITED and the results relate only to the items calibrated or tested.



WELLAB LIMITED

Rms 1516, 1701 & 1716, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong. Tel: 2898 7388 Fax: 2898 7076 Website: www.wellab.com.hk

### TEST REPORT

APPLICANT:

Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

 Test Report No.:
 C/N/160819D

 Date of Issue:
 2016-08-22

 Date Received:
 2016-08-19

 Date Tested:
 2016-08-19

 Date Completed:
 2016-08-22

Page:

Next Due Date:

1 of 1

2017-08-21

ATTN:

Mr. W.K. Tang

# **Certificate of Calibration**

#### Item for calibration:

Description

: Acoustical Calibrator

Manufacturer

: Brüel & Kjær

Model No.

: 4231

Serial No.

: 2412367

Equipment No.

: N-02-03

#### Test conditions:

Room Temperatre

: 24 degree Celsius

Relative Humidity

: 58%

### Methodology:

The Sound Level Calibrator has been calibrated in accordance with the documented procedures and using standard(s) and instrument(s) which are recommended by the manufacturer, or equivalent.

#### Results:

| Sound Pressure Level (1kHz) | Measured SPL | Tolerance      |
|-----------------------------|--------------|----------------|
| At 94 dB SPL                | 94.0         | 94.0 ± 0.1 dB  |
| At 114 dB SPL               | 114.0        | 114.0 ± 0.1 dB |

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE

## APPENDIX C WEATHER INFORMATION

# I. General Information

| Date            | Mean Air<br>Temperature (°C) | Mean Relative<br>Humidity (%) | Precipitation (mm) |
|-----------------|------------------------------|-------------------------------|--------------------|
| 1 January 2017  | 18.4 – 20.8                  | 73 – 87                       | 0                  |
| 2 January 2017  | 18.4 – 23.3                  | 62 – 89                       | 0                  |
| 3 January 2017  | 18.9 – 21.3                  | 77 – 91                       | 0                  |
| 4 January 2017  | 18.7 – 21.7                  | 69 – 86                       | 0                  |
| 5 January 2017  | 18.9 – 23.4                  | 70 – 87                       | 0                  |
| 6 January 2017  | 19.7 – 25.0                  | 62 – 89                       | 0                  |
| 7 January 2017  | 19.7 – 22.8                  | 71 – 85                       | 0                  |
| 8 January 2017  | 20.5 – 25.5                  | 64 – 85                       | 0                  |
| 9 January 2017  | 19.7 – 21.8                  | 72 – 82                       | 0                  |
| 10 January 2017 | 18.8 – 20.5                  | 74 – 83                       | 0                  |
| 11 January 2017 | 18.2 – 19.7                  | 76 – 85                       | 0                  |
| 12 January 2017 | 16.9 – 20.3                  | 76 – 86                       | Trace              |
| 13 January 2017 | 15.1 – 17.1                  | 78 – 93                       | 0.5                |
| 14 January 2017 | 14.5 – 16.5                  | 81 – 96                       | 1.0                |
| 15 January 2017 | 14.3 – 16.8                  | 79 – 94                       | 1.5                |
| 16 January 2017 | 14.7 – 17.4                  | 73 – 92                       | 0.4                |
| 17 January 2017 | 16.7 – 19.2                  | 69 – 84                       | 0                  |
| 18 January 2017 | 18.0 – 20.0                  | 81 – 91                       | Trace              |
| 19 January 2017 | 18.7 – 24.1                  | 61 – 87                       | 0                  |

# I. General Information

| Date            | Mean Air<br>Temperature (°C) | Mean Relative<br>Humidity (%) | Precipitation<br>(mm) |
|-----------------|------------------------------|-------------------------------|-----------------------|
| 20 January 2017 | 16.2 – 20.6                  | 55 – 86                       | Trace                 |
| 21 January 2017 | 14.6 – 19.0                  | 54 – 80                       | 0                     |
| 22 January 2017 | 13.6 – 19.8                  | 44 – 75                       | 0                     |
| 23 January 2017 | 15.2 – 19.4                  | 62 – 81                       | 0                     |
| 24 January 2017 | 15.7 – 18.9                  | 58 – 78                       | 0                     |
| 25 January 2017 | 15.9 – 20.9                  | 65 - 83                       | 0                     |
| 26 January 2017 | 16.2 – 19.8                  | 64 – 84                       | 0                     |
| 27 January 2017 | 14.4 – 21.3                  | 42 – 85                       | 0                     |
| 28 January 2017 | 16.4 – 18.8                  | 68 – 87                       | 0.3                   |
| 29 January 2017 | 18.1 – 21.5                  | 77 – 96                       | 2.4                   |
| 30 January 2017 | 17.4 – 23.4                  | 79 – 95                       | 1.2                   |
| 31 January 2017 | 15.9 – 17.6                  | 83 – 95                       | 0.5                   |

<sup>\*</sup> The above information was extracted from the daily weather summary by Hong Kong Observatory.

| Date       | Time  | Wind Speed m/s | Direction |
|------------|-------|----------------|-----------|
| 1-Jan-2017 | 0:00  | 2.5            | S         |
| 1-Jan-2017 | 1:00  | 2.4            | SSE       |
| 1-Jan-2017 | 2:00  | 2.1            | SW        |
| 1-Jan-2017 | 3:00  | 2.2            | SW        |
| 1-Jan-2017 | 4:00  | 1.9            | SW        |
| 1-Jan-2017 | 5:00  | 1.9            | W         |
| 1-Jan-2017 | 6:00  | 2.1            | W         |
| 1-Jan-2017 | 7:00  | 2.5            | NE        |
| 1-Jan-2017 | 8:00  | 2.6            | NE        |
| 1-Jan-2017 | 9:00  | 2.4            | N         |
| 1-Jan-2017 | 10:00 | 2.8            | SSW       |
| 1-Jan-2017 | 11:00 | 2.9            | SW        |
| 1-Jan-2017 | 12:00 | 3.0            | SW        |
| 1-Jan-2017 | 13:00 | 2.9            | SW        |
| 1-Jan-2017 | 14:00 | 2.9            | SW        |
| 1-Jan-2017 | 15:00 | 2.9            | WSW       |
| 1-Jan-2017 | 16:00 | 2.8            | NE        |
| 1-Jan-2017 | 17:00 | 2.4            | NNE       |
| 1-Jan-2017 | 18:00 | 2.0            | SW        |
| 1-Jan-2017 | 19:00 | 1.7            | SSW       |
| 1-Jan-2017 | 20:00 | 2.1            | SW        |
| 1-Jan-2017 | 21:00 | 2.2            | W         |
| 1-Jan-2017 | 22:00 | 2.3            | E         |
| 1-Jan-2017 | 23:00 | 2.1            | W         |
| 2-Jan-2017 | 0:00  | 1.8            | NNE       |
| 2-Jan-2017 | 1:00  | 1.4            | ESE       |
| 2-Jan-2017 | 2:00  | 1.7            | S         |
| 2-Jan-2017 | 3:00  | 1.6            | WSW       |
| 2-Jan-2017 | 4:00  | 1.6            | WNW       |
| 2-Jan-2017 | 5:00  | 0.8            | E         |
| 2-Jan-2017 | 6:00  | 0.8            | E         |
| 2-Jan-2017 | 7:00  | 0.8            | E         |
| 2-Jan-2017 | 8:00  | 0.9            | N         |
| 2-Jan-2017 | 9:00  | 0.9            | ENE       |
| 2-Jan-2017 | 10:00 | 1.2            | ENE       |
| 2-Jan-2017 | 11:00 | 1.3            | NE        |

| 2-Jan-2017 | 12:00 | 2.1 | ENE |
|------------|-------|-----|-----|
| 2-Jan-2017 | 13:00 | 2.2 | ENE |
| 2-Jan-2017 | 14:00 | 2.4 | ENE |
| 2-Jan-2017 | 15:00 | 1.7 | ENE |
| 2-Jan-2017 | 16:00 | 1.3 | ESE |
| 2-Jan-2017 | 17:00 | 1.6 | ESE |
| 2-Jan-2017 | 18:00 | 1.3 | ESE |
| 2-Jan-2017 | 19:00 | 1   | E   |
| 2-Jan-2017 | 20:00 | 1   | SE  |
| 2-Jan-2017 | 21:00 | 1.1 | SE  |
| 2-Jan-2017 | 22:00 | 0.9 | NE  |
| 2-Jan-2017 | 23:00 | 1   | NE  |
| 3-Jan-2017 | 0:00  | 1.1 | NE  |
| 3-Jan-2017 | 1:00  | 1.2 | NE  |
| 3-Jan-2017 | 2:00  | 1.1 | ESE |
| 3-Jan-2017 | 3:00  | 1   | NE  |
| 3-Jan-2017 | 4:00  | 0.9 | NE  |
| 3-Jan-2017 | 5:00  | 1   | NE  |
| 3-Jan-2017 | 6:00  | 0.8 | NNE |
| 3-Jan-2017 | 7:00  | 1.2 | NE  |
| 3-Jan-2017 | 8:00  | 1.4 | NNE |
| 3-Jan-2017 | 9:00  | 1.4 | E   |
| 3-Jan-2017 | 10:00 | 1.6 | ENE |
| 3-Jan-2017 | 11:00 | 2   | SW  |
| 3-Jan-2017 | 12:00 | 2.5 | S   |
| 3-Jan-2017 | 13:00 | 2.6 | SSW |
| 3-Jan-2017 | 14:00 | 2.7 | N   |
| 3-Jan-2017 | 15:00 | 2.7 | WSW |
| 3-Jan-2017 | 16:00 | 2.7 | SW  |
| 3-Jan-2017 | 17:00 | 2.2 | SW  |
| 3-Jan-2017 | 18:00 | 1.9 | SSW |
| 3-Jan-2017 | 19:00 | 1.9 | W   |
| 3-Jan-2017 | 20:00 | 1.8 | W   |
| 3-Jan-2017 | 21:00 | 1.5 | W   |
| 3-Jan-2017 | 22:00 | 1.6 | WNW |
| 3-Jan-2017 | 23:00 | 1.3 | SSW |
| 4-Jan-2017 | 0:00  | 1.3 | W   |
|            |       |     |     |

| 4-Jan-2017                                           | 1:00                         | 1.6                           | w            |
|------------------------------------------------------|------------------------------|-------------------------------|--------------|
| 4-Jan-2017<br>4-Jan-2017                             | 2:00                         | 1.7                           | SW           |
| 4-Jan-2017<br>4-Jan-2017                             | 3:00                         | 1.5                           | N N          |
|                                                      |                              |                               |              |
| 4-Jan-2017                                           | 4:00                         | 1.4                           | NW           |
| 4-Jan-2017                                           | 5:00                         | 1.7                           | SW           |
| 4-Jan-2017                                           | 6:00                         | 1.6                           | SW           |
| 4-Jan-2017                                           | 7:00                         | 1.5                           | WNW          |
| 4-Jan-2017                                           | 8:00                         | 1.6                           | W            |
| 4-Jan-2017                                           | 9:00                         | 1.8                           | W            |
| 4-Jan-2017                                           | 10:00                        | 2.4                           | SW           |
| 4-Jan-2017                                           | 11:00                        | 2.8                           | SW           |
| 4-Jan-2017                                           | 12:00                        | 2.5                           | SW           |
| 4-Jan-2017                                           | 13:00                        | 2.6                           | W            |
| 4-Jan-2017                                           | 14:00                        | 2.8                           | SW           |
| 4-Jan-2017                                           | 15:00                        | 2.7                           | ENE          |
| 4-Jan-2017                                           | 16:00                        | 2.2                           | NE           |
| 4-Jan-2017                                           | 17:00                        | 2.5                           | NE           |
| 4-Jan-2017                                           | 18:00                        | 2                             | NE           |
| 4-Jan-2017                                           | 19:00                        | 2.3                           | NNE          |
| 4-Jan-2017                                           | 20:00                        | 1.9                           | NE           |
| 4-Jan-2017                                           | 21:00                        | 2.2                           | NE           |
| 4-Jan-2017                                           | 22:00                        | 2.4                           | NE           |
| 4-Jan-2017                                           | 23:00                        | 2.4                           | Е            |
| 5-Jan-2017                                           | 0:00                         | 2.5                           | N            |
| 5-Jan-2017                                           | 1:00                         | 2.5                           | ENE          |
| 5-Jan-2017                                           | 2:00                         | 2.9                           | ENE          |
| 5-Jan-2017                                           | 3:00                         | 3                             | W            |
| 5-Jan-2017                                           | 4:00                         | 3.1                           | W            |
| 5-Jan-2017                                           | 5:00                         | 3                             | WNW          |
| 5-Jan-2017                                           | 6:00                         | 3.2                           | NE           |
| 5-Jan-2017                                           | 7:00                         | 2.8                           | N            |
| 5-Jan-2017                                           | 8:00                         | 3.1                           | N            |
| 5-Jan-2017                                           | 9:00                         | 3.1                           | NNE          |
| 5-Jan-2017                                           |                              | 3.1                           | NNE          |
| _                                                    |                              |                               |              |
|                                                      |                              |                               |              |
| _                                                    |                              |                               |              |
| 5-Jan-2017<br>5-Jan-2017<br>5-Jan-2017<br>5-Jan-2017 | 5:00<br>6:00<br>7:00<br>8:00 | 3<br>3.2<br>2.8<br>3.1<br>3.1 | WNW NE N N N |

| 5-Jan-2017         15:00         3.7         ENE           5-Jan-2017         16:00         3.3         ENE           5-Jan-2017         17:00         3.2         WNW           5-Jan-2017         18:00         3.3         SW           5-Jan-2017         19:00         2.5         SW           5-Jan-2017         20:00         2.7         SSW           5-Jan-2017         21:00         2.9         WSW           5-Jan-2017         22:00         2.9         WNW           5-Jan-2017         23:00         2.4         WNW           6-Jan-2017         0:00         2.6         WNW           6-Jan-2017         1:00         2.9         WNW           6-Jan-2017         4:00         2         WNW           6-Jan-2017         4:00         2         WNW           6-Jan-2017         5:00         1.8         WNW           6-Jan-2017                                                            | 5-Jan-2017 | 14:00 | 3.3 | ENE |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-------|-----|-----|
| 5-Jan-2017         16:00         3.3         ENE           5-Jan-2017         17:00         3.2         WNW           5-Jan-2017         18:00         3.3         SW           5-Jan-2017         19:00         2.5         SW           5-Jan-2017         20:00         2.7         SSW           5-Jan-2017         21:00         2.9         WNW           5-Jan-2017         22:00         2.9         WNW           6-Jan-2017         0:00         2.6         WNW           6-Jan-2017         0:00         2.6         WNW           6-Jan-2017         1:00         2.9         WNW           6-Jan-2017         4:00         2         WNW           6-Jan-2017         4:00         2         WNW           6-Jan-2017         6:00         1.6         WSW           6-Jan-2017                                                              |            |       | _   |     |
| 5-Jan-2017         17:00         3.2         WNW           5-Jan-2017         18:00         3.3         SW           5-Jan-2017         19:00         2.5         SW           5-Jan-2017         20:00         2.7         SSW           5-Jan-2017         21:00         2.9         WSW           5-Jan-2017         22:00         2.9         WNW           6-Jan-2017         0:00         2.6         WNW           6-Jan-2017         0:00         2.6         WNW           6-Jan-2017         1:00         2.9         WNW           6-Jan-2017         4:00         2         WNW           6-Jan-2017         4:00         2         WNW           6-Jan-2017         6:00         1.6         WSW           6-Jan-2017         8:00         2.1         N           6-Jan-2017         10:00         2.6         SSW           6-Jan-2017 <t< td=""><td></td><td></td><td>+</td><td></td></t<>           |            |       | +   |     |
| 5-Jan-2017         18:00         3.3         SW           5-Jan-2017         19:00         2.5         SW           5-Jan-2017         20:00         2.7         SSW           5-Jan-2017         21:00         2.9         WSW           5-Jan-2017         22:00         2.9         WNW           6-Jan-2017         20:00         2.4         WNW           6-Jan-2017         0:00         2.6         WNW           6-Jan-2017         1:00         2.9         WNW           6-Jan-2017         1:00         2.9         WNW           6-Jan-2017         1:00         2.9         WNW           6-Jan-2017         1:00         2.9         WNW           6-Jan-2017         2:00         2.1         WNW           6-Jan-2017         3:00         2.1         WNW           6-Jan-2017         4:00         2         WSW           6-Jan-2017         5:00         1.8         WNW           6-Jan-2017         6:00         1.6         WSW           6-Jan-2017         8:00         2.1         N           6-Jan-2017         10:00         2.6         SSW           6-Jan-2017                                                              |            |       | +   |     |
| 5-Jan-2017         19:00         2.5         SW           5-Jan-2017         20:00         2.7         SSW           5-Jan-2017         21:00         2.9         WSW           5-Jan-2017         22:00         2.9         WNW           6-Jan-2017         23:00         2.4         WNW           6-Jan-2017         0:00         2.6         WNW           6-Jan-2017         1:00         2.9         WNW           6-Jan-2017         3:00         2.1         WNW           6-Jan-2017         4:00         2         WNW           6-Jan-2017         5:00         1.8         WNW           6-Jan-2017         6:00         1.6         WSW           6-Jan-2017         8:00         2.1         N           6-Jan-2017         9:00         2.6         ESE           6-Jan-2017         10:00         2.6         SSW           6-Jan-2017                                                              |            |       | _   |     |
| 5-Jan-2017         20:00         2.7         SSW           5-Jan-2017         21:00         2.9         WSW           5-Jan-2017         22:00         2.9         WNW           5-Jan-2017         23:00         2.4         WNW           6-Jan-2017         0:00         2.6         WNW           6-Jan-2017         1:00         2.9         WNW           6-Jan-2017         2:00         2.1         WNW           6-Jan-2017         3:00         2.1         WNW           6-Jan-2017         4:00         2         WNW           6-Jan-2017         5:00         1.8         WNW           6-Jan-2017         5:00         1.6         WSW           6-Jan-2017         6:00         1.6         WSW           6-Jan-2017         7:00         2         WSW           6-Jan-2017         8:00         2.1         N           6-Jan-2017         9:00         2.6         ESE           6-Jan-2017         10:00         2.6         SSW           6-Jan-2017         11:00         2.8         W           6-Jan-2017         15:00         2.6         SSW           6-Jan-2017 <t< td=""><td></td><td></td><td></td><td></td></t<>            |            |       |     |     |
| 5-Jan-2017         21:00         2.9         WSW           5-Jan-2017         22:00         2.9         WNW           5-Jan-2017         23:00         2.4         WNW           6-Jan-2017         0:00         2.6         WNW           6-Jan-2017         1:00         2.9         WNW           6-Jan-2017         2:00         2.1         WNW           6-Jan-2017         3:00         2.1         WNW           6-Jan-2017         4:00         2         WNW           6-Jan-2017         5:00         1.8         WNW           6-Jan-2017         6:00         1.6         WSW           6-Jan-2017         7:00         2         WSW           6-Jan-2017         8:00         2.1         N           6-Jan-2017         9:00         2.6         ESE           6-Jan-2017         10:00         2.6         SSW           6-Jan-2017         11:00         2.8         W           6-Jan-2017         12:00         2.6         SSW           6-Jan-2017         15:00         2.6         WSW           6-Jan-2017         15:00         2.6         WSW           6-Jan-2017         <                                                     |            |       |     |     |
| 5-Jan-2017         22:00         2.9         WNW           5-Jan-2017         23:00         2.4         WNW           6-Jan-2017         0:00         2.6         WNW           6-Jan-2017         1:00         2.9         WNW           6-Jan-2017         2:00         2.1         WNW           6-Jan-2017         3:00         2.1         WNW           6-Jan-2017         4:00         2         WNW           6-Jan-2017         5:00         1.8         WNW           6-Jan-2017         6:00         1.6         WSW           6-Jan-2017         7:00         2         WSW           6-Jan-2017         8:00         2.1         N           6-Jan-2017         9:00         2.6         ESE           6-Jan-2017         10:00         2.6         SSW           6-Jan-2017         11:00         2.8         W           6-Jan-2017         12:00         2.6         SSW           6-Jan-2017         13:00         3         WSW           6-Jan-2017         14:00         2.6         WSW           6-Jan-2017         16:00         2.4         W           6-Jan-2017         1                                                         |            |       | +   |     |
| 5-Jan-2017         23:00         2.4         WNW           6-Jan-2017         0:00         2.6         WNW           6-Jan-2017         1:00         2.9         WNW           6-Jan-2017         2:00         2.1         WNW           6-Jan-2017         3:00         2.1         WNW           6-Jan-2017         4:00         2         WNW           6-Jan-2017         5:00         1.8         WNW           6-Jan-2017         6:00         1.6         WSW           6-Jan-2017         7:00         2         WSW           6-Jan-2017         8:00         2.1         N           6-Jan-2017         9:00         2.6         ESE           6-Jan-2017         10:00         2.6         ESE           6-Jan-2017         11:00         2.8         W           6-Jan-2017         12:00         2.6         SSW           6-Jan-2017         13:00         3         WSW           6-Jan-2017         15:00         2.6         W           6-Jan-2017         15:00         2.6         WSW           6-Jan-2017         16:00         2.4         W           6-Jan-2017         19:                                                         |            |       | _   |     |
| 6-Jan-2017 0:00 2.6 WNW 6-Jan-2017 2:00 2.1 WNW 6-Jan-2017 3:00 2.1 WNW 6-Jan-2017 3:00 2.1 WNW 6-Jan-2017 4:00 2 WNW 6-Jan-2017 5:00 1.8 WNW 6-Jan-2017 6:00 1.6 WSW 6-Jan-2017 7:00 2 WSW 6-Jan-2017 8:00 2.1 N 6-Jan-2017 8:00 2.1 N 6-Jan-2017 9:00 2.6 ESE 6-Jan-2017 10:00 2.6 SSW 6-Jan-2017 11:00 2.8 WSW 6-Jan-2017 12:00 2.6 SSW 6-Jan-2017 13:00 3 WSW 6-Jan-2017 14:00 2.6 WSW 6-Jan-2017 15:00 2.3 W 6-Jan-2017 15:00 2.4 W 6-Jan-2017 15:00 2.5 W 6-Jan-2017 15:00 2.5 W 6-Jan-2017 20:00 2.5 SSW 6-Jan-2017 22:00 2.5 SSW 6-Jan-2017 22:00 2.5 SSW 6-Jan-2017 22:00 2.5 SSW 7-Jan-2017 23:00 2.2 SSW 7-Jan-2017 1:00 1.9 SSE                                                                                                                                                                                                                                                                                                          | 5-Jan-2017 | 22:00 | 2.9 | WNW |
| 6-Jan-2017 1:00 2.9 WNW 6-Jan-2017 2:00 2.1 WNW 6-Jan-2017 3:00 2.1 WNW 6-Jan-2017 4:00 2 WNW 6-Jan-2017 5:00 1.8 WNW 6-Jan-2017 6:00 1.6 WSW 6-Jan-2017 7:00 2 WSW 6-Jan-2017 8:00 2.1 N 6-Jan-2017 9:00 2.6 ESE 6-Jan-2017 10:00 2.6 SSW 6-Jan-2017 11:00 2.8 WSW 6-Jan-2017 12:00 2.6 SSW 6-Jan-2017 12:00 2.6 WSW 6-Jan-2017 13:00 3 WSW 6-Jan-2017 14:00 2.6 WSW 6-Jan-2017 15:00 2.5 WSW 6-Jan-2017 15:00 2.5 W 6-Jan-2017 15:00 2.5 W 6-Jan-2017 20:00 2.5 SSW 6-Jan-2017 21:00 2.4 W 6-Jan-2017 22:00 2.5 SSW 6-Jan-2017 22:00 2.5 SSW 6-Jan-2017 22:00 2.5 SSW 6-Jan-2017 23:00 2.2 SSW 7-Jan-2017 1:00 1.9 SSE                                                                                                                                                                                                                                                                                                                                                      | 5-Jan-2017 | 23:00 | 2.4 | WNW |
| 6-Jan-2017         2:00         2.1         WNW           6-Jan-2017         3:00         2.1         WNW           6-Jan-2017         4:00         2         WNW           6-Jan-2017         5:00         1.8         WNW           6-Jan-2017         6:00         1.6         WSW           6-Jan-2017         7:00         2         WSW           6-Jan-2017         8:00         2.1         N           6-Jan-2017         9:00         2.6         ESE           6-Jan-2017         10:00         2.6         SSW           6-Jan-2017         11:00         2.8         W           6-Jan-2017         12:00         2.6         SSW           6-Jan-2017         13:00         3         WSW           6-Jan-2017         14:00         2.6         WSW           6-Jan-2017         15:00         2.6         WSW           6-Jan-2017         16:00         2.4         W           6-Jan-2017         18:00         2.4         W           6-Jan-2017         19:00         2.5         W           6-Jan-2017         20:00         2.5         W           6-Jan-2017         21:00                                                         | 6-Jan-2017 | 0:00  | 2.6 | WNW |
| 6-Jan-2017         3:00         2.1         WNW           6-Jan-2017         4:00         2         WNW           6-Jan-2017         5:00         1.8         WNW           6-Jan-2017         6:00         1.6         WSW           6-Jan-2017         7:00         2         WSW           6-Jan-2017         8:00         2.1         N           6-Jan-2017         9:00         2.6         ESE           6-Jan-2017         10:00         2.6         SSW           6-Jan-2017         11:00         2.8         W           6-Jan-2017         12:00         2.6         SSW           6-Jan-2017         13:00         3         WSW           6-Jan-2017         14:00         2.6         WSW           6-Jan-2017         15:00         2.6         WSW           6-Jan-2017         16:00         2.4         W           6-Jan-2017         17:00         2.3         W           6-Jan-2017         19:00         2.5         W           6-Jan-2017         20:00         2.5         W           6-Jan-2017         21:00         2.4         W           6-Jan-2017         21:00<                                                         | 6-Jan-2017 | 1:00  | 2.9 | WNW |
| 6-Jan-2017 4:00 2 WNW 6-Jan-2017 5:00 1.8 WNW 6-Jan-2017 6:00 1.6 WSW 6-Jan-2017 7:00 2 WSW 6-Jan-2017 8:00 2.1 N 6-Jan-2017 9:00 2.6 ESE 6-Jan-2017 10:00 2.6 SSW 6-Jan-2017 11:00 2.8 WSW 6-Jan-2017 12:00 2.6 SSW 6-Jan-2017 13:00 3 WSW 6-Jan-2017 14:00 2.6 WSW 6-Jan-2017 15:00 2.4 W 6-Jan-2017 15:00 2.3 W 6-Jan-2017 15:00 2.4 W 6-Jan-2017 15:00 2.5 W 6-Jan-2017 20:00 2.5 W 6-Jan-2017 20:00 2.5 SSW 6-Jan-2017 22:00 2.5 SSW 6-Jan-2017 22:00 2.5 SSW 6-Jan-2017 23:00 2.2 SSW 7-Jan-2017 23:00 2.2 SSW 7-Jan-2017 1:00 1.9 SSE                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 6-Jan-2017 | 2:00  | 2.1 | WNW |
| 6-Jan-2017 5:00 1.8 WNW 6-Jan-2017 6:00 1.6 WSW 6-Jan-2017 7:00 2 WSW 6-Jan-2017 8:00 2.1 N 6-Jan-2017 9:00 2.6 ESE 6-Jan-2017 10:00 2.8 WSW 6-Jan-2017 11:00 2.8 WSW 6-Jan-2017 12:00 2.6 SSW 6-Jan-2017 13:00 3 WSW 6-Jan-2017 14:00 2.6 WSW 6-Jan-2017 15:00 2.6 WSW 6-Jan-2017 15:00 2.6 WSW 6-Jan-2017 15:00 2.6 WSW 6-Jan-2017 16:00 2.4 W 6-Jan-2017 16:00 2.4 W 6-Jan-2017 17:00 2.3 WSW 6-Jan-2017 19:00 2.5 WSW 6-Jan-2017 20:00 2.5 WSW 6-Jan-2017 20:00 2.5 SSW 6-Jan-2017 22:00 2.5 SSW 6-Jan-2017 22:00 2.5 SSW 6-Jan-2017 23:00 2.2 SSW 7-Jan-2017 0:00 2 NE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 6-Jan-2017 | 3:00  | 2.1 | WNW |
| 6-Jan-2017         6:00         1.6         WSW           6-Jan-2017         7:00         2         WSW           6-Jan-2017         8:00         2.1         N           6-Jan-2017         9:00         2.6         ESE           6-Jan-2017         10:00         2.6         SSW           6-Jan-2017         11:00         2.8         W           6-Jan-2017         12:00         2.6         SSW           6-Jan-2017         13:00         3         WSW           6-Jan-2017         14:00         2.6         W           6-Jan-2017         15:00         2.6         WSW           6-Jan-2017         16:00         2.4         W           6-Jan-2017         17:00         2.3         W           6-Jan-2017         18:00         2.4         W           6-Jan-2017         19:00         2.5         W           6-Jan-2017         20:00         2.5         W           6-Jan-2017         21:00         2.4         W           6-Jan-2017         22:00         2.5         SSW           6-Jan-2017         23:00         2.2         SSW           7-Jan-2017         0:00<                                                         | 6-Jan-2017 | 4:00  | 2   | WNW |
| 6-Jan-2017         7:00         2         WSW           6-Jan-2017         8:00         2.1         N           6-Jan-2017         9:00         2.6         ESE           6-Jan-2017         10:00         2.6         SSW           6-Jan-2017         11:00         2.8         W           6-Jan-2017         12:00         2.6         SSW           6-Jan-2017         13:00         3         WSW           6-Jan-2017         14:00         2.6         W           6-Jan-2017         15:00         2.6         WSW           6-Jan-2017         16:00         2.4         W           6-Jan-2017         17:00         2.3         W           6-Jan-2017         18:00         2.4         W           6-Jan-2017         19:00         2.5         W           6-Jan-2017         20:00         2.5         W           6-Jan-2017         21:00         2.4         W           6-Jan-2017         22:00         2.5         SSW           6-Jan-2017         23:00         2.5         SSW           7-Jan-2017         0:00         2         NE           7-Jan-2017         1:00 <td>6-Jan-2017</td> <td>5:00</td> <td>1.8</td> <td>WNW</td> | 6-Jan-2017 | 5:00  | 1.8 | WNW |
| 6-Jan-2017         8:00         2.1         N           6-Jan-2017         9:00         2.6         ESE           6-Jan-2017         10:00         2.6         SSW           6-Jan-2017         11:00         2.8         W           6-Jan-2017         12:00         2.6         SSW           6-Jan-2017         13:00         3         WSW           6-Jan-2017         14:00         2.6         WSW           6-Jan-2017         15:00         2.6         WSW           6-Jan-2017         16:00         2.4         W           6-Jan-2017         17:00         2.3         W           6-Jan-2017         18:00         2.4         W           6-Jan-2017         19:00         2.5         W           6-Jan-2017         20:00         2.5         W           6-Jan-2017         21:00         2.4         W           6-Jan-2017         22:00         2.5         SSW           6-Jan-2017         23:00         2.2         SSW           7-Jan-2017         0:00         2         NE           7-Jan-2017         1:00         1.9         SSE                                                                                           | 6-Jan-2017 | 6:00  | 1.6 | WSW |
| 6-Jan-2017         9:00         2.6         ESE           6-Jan-2017         10:00         2.6         SSW           6-Jan-2017         11:00         2.8         W           6-Jan-2017         12:00         2.6         SSW           6-Jan-2017         13:00         3         WSW           6-Jan-2017         14:00         2.6         WSW           6-Jan-2017         15:00         2.6         WSW           6-Jan-2017         16:00         2.4         W           6-Jan-2017         17:00         2.3         W           6-Jan-2017         18:00         2.4         W           6-Jan-2017         19:00         2.5         W           6-Jan-2017         20:00         2.5         W           6-Jan-2017         21:00         2.4         W           6-Jan-2017         22:00         2.5         SSW           6-Jan-2017         23:00         2.2         SSW           7-Jan-2017         0:00         2         NE           7-Jan-2017         1:00         1.9         SSE                                                                                                                                                   | 6-Jan-2017 | 7:00  | 2   | WSW |
| 6-Jan-2017         10:00         2.6         SSW           6-Jan-2017         11:00         2.8         W           6-Jan-2017         12:00         2.6         SSW           6-Jan-2017         13:00         3         WSW           6-Jan-2017         14:00         2.6         W           6-Jan-2017         15:00         2.6         WSW           6-Jan-2017         16:00         2.4         W           6-Jan-2017         17:00         2.3         W           6-Jan-2017         18:00         2.4         W           6-Jan-2017         19:00         2.5         W           6-Jan-2017         20:00         2.5         W           6-Jan-2017         21:00         2.4         W           6-Jan-2017         22:00         2.5         SSW           6-Jan-2017         23:00         2.2         SSW           7-Jan-2017         0:00         2         NE           7-Jan-2017         1:00         1.9         SSE                                                                                                                                                                                                               | 6-Jan-2017 | 8:00  | 2.1 | N   |
| 6-Jan-2017 11:00 2.8 W 6-Jan-2017 12:00 2.6 SSW 6-Jan-2017 13:00 3 WSW 6-Jan-2017 14:00 2.6 WSW 6-Jan-2017 15:00 2.6 WSW 6-Jan-2017 16:00 2.4 W 6-Jan-2017 17:00 2.3 W 6-Jan-2017 18:00 2.4 W 6-Jan-2017 19:00 2.5 W 6-Jan-2017 20:00 2.5 W 6-Jan-2017 21:00 2.4 W 6-Jan-2017 21:00 2.5 SSW 6-Jan-2017 22:00 2.5 SSW 7-Jan-2017 0:00 2 NE 7-Jan-2017 1:00 1.9 SSE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 6-Jan-2017 | 9:00  | 2.6 | ESE |
| 6-Jan-2017 12:00 2.6 SSW 6-Jan-2017 13:00 3 WSW 6-Jan-2017 14:00 2.6 W 6-Jan-2017 15:00 2.6 WSW 6-Jan-2017 16:00 2.4 W 6-Jan-2017 17:00 2.3 W 6-Jan-2017 18:00 2.4 W 6-Jan-2017 19:00 2.5 W 6-Jan-2017 20:00 2.5 W 6-Jan-2017 21:00 2.4 W 6-Jan-2017 21:00 2.5 SSW 6-Jan-2017 22:00 2.5 SSW 7-Jan-2017 0:00 2 NE 7-Jan-2017 1:00 1.9 SSE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 6-Jan-2017 | 10:00 | 2.6 | SSW |
| 6-Jan-2017 13:00 3 WSW 6-Jan-2017 14:00 2.6 W 6-Jan-2017 15:00 2.6 WSW 6-Jan-2017 16:00 2.4 W 6-Jan-2017 17:00 2.3 W 6-Jan-2017 18:00 2.4 W 6-Jan-2017 19:00 2.5 W 6-Jan-2017 20:00 2.5 W 6-Jan-2017 21:00 2.4 W 6-Jan-2017 21:00 2.5 SSW 6-Jan-2017 22:00 2.5 SSW 7-Jan-2017 0:00 2 NE 7-Jan-2017 1:00 1.9 SSE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 6-Jan-2017 | 11:00 | 2.8 | W   |
| 6-Jan-2017       14:00       2.6       W         6-Jan-2017       15:00       2.6       WSW         6-Jan-2017       16:00       2.4       W         6-Jan-2017       17:00       2.3       W         6-Jan-2017       18:00       2.4       W         6-Jan-2017       19:00       2.5       W         6-Jan-2017       20:00       2.5       W         6-Jan-2017       21:00       2.4       W         6-Jan-2017       22:00       2.5       SSW         6-Jan-2017       23:00       2.2       SSW         7-Jan-2017       0:00       2       NE         7-Jan-2017       1:00       1.9       SSE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 6-Jan-2017 | 12:00 | 2.6 | SSW |
| 6-Jan-2017 15:00 2.6 WSW 6-Jan-2017 16:00 2.4 W 6-Jan-2017 17:00 2.3 W 6-Jan-2017 18:00 2.4 W 6-Jan-2017 19:00 2.5 W 6-Jan-2017 20:00 2.5 W 6-Jan-2017 21:00 2.4 W 6-Jan-2017 21:00 2.4 SSW 6-Jan-2017 22:00 2.5 SSW 7-Jan-2017 0:00 2 NE 7-Jan-2017 1:00 1.9 SSE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 6-Jan-2017 | 13:00 | 3   | WSW |
| 6-Jan-2017       16:00       2.4       W         6-Jan-2017       17:00       2.3       W         6-Jan-2017       18:00       2.4       W         6-Jan-2017       19:00       2.5       W         6-Jan-2017       20:00       2.5       W         6-Jan-2017       21:00       2.4       W         6-Jan-2017       22:00       2.5       SSW         6-Jan-2017       23:00       2.2       SSW         7-Jan-2017       0:00       2       NE         7-Jan-2017       1:00       1.9       SSE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 6-Jan-2017 | 14:00 | 2.6 | W   |
| 6-Jan-2017       17:00       2.3       W         6-Jan-2017       18:00       2.4       W         6-Jan-2017       19:00       2.5       W         6-Jan-2017       20:00       2.5       W         6-Jan-2017       21:00       2.4       W         6-Jan-2017       22:00       2.5       SSW         6-Jan-2017       23:00       2.2       SSW         7-Jan-2017       0:00       2       NE         7-Jan-2017       1:00       1.9       SSE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 6-Jan-2017 | 15:00 | 2.6 | WSW |
| 6-Jan-2017       18:00       2.4       W         6-Jan-2017       19:00       2.5       W         6-Jan-2017       20:00       2.5       W         6-Jan-2017       21:00       2.4       W         6-Jan-2017       22:00       2.5       SSW         6-Jan-2017       23:00       2.2       SSW         7-Jan-2017       0:00       2       NE         7-Jan-2017       1:00       1.9       SSE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 6-Jan-2017 | 16:00 | 2.4 | W   |
| 6-Jan-2017       19:00       2.5       W         6-Jan-2017       20:00       2.5       W         6-Jan-2017       21:00       2.4       W         6-Jan-2017       22:00       2.5       SSW         6-Jan-2017       23:00       2.2       SSW         7-Jan-2017       0:00       2       NE         7-Jan-2017       1:00       1.9       SSE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 6-Jan-2017 | 17:00 | 2.3 | W   |
| 6-Jan-2017       20:00       2.5       W         6-Jan-2017       21:00       2.4       W         6-Jan-2017       22:00       2.5       SSW         6-Jan-2017       23:00       2.2       SSW         7-Jan-2017       0:00       2       NE         7-Jan-2017       1:00       1.9       SSE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 6-Jan-2017 | 18:00 | 2.4 | W   |
| 6-Jan-2017       21:00       2.4       W         6-Jan-2017       22:00       2.5       SSW         6-Jan-2017       23:00       2.2       SSW         7-Jan-2017       0:00       2       NE         7-Jan-2017       1:00       1.9       SSE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 6-Jan-2017 | 19:00 | 2.5 | W   |
| 6-Jan-2017       21:00       2.4       W         6-Jan-2017       22:00       2.5       SSW         6-Jan-2017       23:00       2.2       SSW         7-Jan-2017       0:00       2       NE         7-Jan-2017       1:00       1.9       SSE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 6-Jan-2017 | 20:00 | 2.5 | W   |
| 6-Jan-2017       23:00       2.2       SSW         7-Jan-2017       0:00       2       NE         7-Jan-2017       1:00       1.9       SSE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 6-Jan-2017 | 21:00 | 2.4 | W   |
| 6-Jan-2017       23:00       2.2       SSW         7-Jan-2017       0:00       2       NE         7-Jan-2017       1:00       1.9       SSE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 6-Jan-2017 | 22:00 | 2.5 | SSW |
| 7-Jan-2017 0:00 2 NE<br>7-Jan-2017 1:00 1.9 SSE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |            |       | +   |     |
| 7-Jan-2017 1:00 1.9 SSE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |            |       |     |     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |            |       |     |     |
| 7-Jan-2017   2:00   1.6   NW                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 7-Jan-2017 | 2:00  | 1.6 | NW  |

| 7-Jan-2017 | 3:00  | 1.7 | NNW |
|------------|-------|-----|-----|
| 7-Jan-2017 | 4:00  | 1.7 | WNW |
| 7-Jan-2017 | 5:00  | 2.3 | W   |
| 7-Jan-2017 | 6:00  | 1.9 | W   |
| 7-Jan-2017 | 7:00  | 2.2 | W   |
| 7-Jan-2017 | 8:00  | 2.5 | W   |
| 7-Jan-2017 | 9:00  | 2.4 | WNW |
| 7-Jan-2017 | 10:00 | 2.2 | W   |
| 7-Jan-2017 | 11:00 | 2.3 | W   |
| 7-Jan-2017 | 12:00 | 2.7 | WNW |
| 7-Jan-2017 | 13:00 | 2.4 | WSW |
| 7-Jan-2017 | 14:00 | 2.3 | WNW |
| 7-Jan-2017 | 15:00 | 2.6 | SW  |
| 7-Jan-2017 | 16:00 | 2.6 | W   |
| 7-Jan-2017 | 17:00 | 2.1 | W   |
| 7-Jan-2017 | 18:00 | 1.8 | SW  |
| 7-Jan-2017 | 19:00 | 1.4 | NNE |
| 7-Jan-2017 | 20:00 | 1.2 | Е   |
| 7-Jan-2017 | 21:00 | 1.6 | NE  |
| 7-Jan-2017 | 22:00 | 1.8 | NE  |
| 7-Jan-2017 | 23:00 | 1.3 | NE  |
| 8-Jan-2017 | 0:00  | 1.1 | NE  |
| 8-Jan-2017 | 1:00  | 1.3 | ENE |
| 8-Jan-2017 | 2:00  | 1.2 | Е   |
| 8-Jan-2017 | 3:00  | 1   | WSW |
| 8-Jan-2017 | 4:00  | 0.9 | SW  |
| 8-Jan-2017 | 5:00  | 1.2 | ESE |
| 8-Jan-2017 | 6:00  | 1   | NE  |
| 8-Jan-2017 | 7:00  | 1   | SW  |
| 8-Jan-2017 | 8:00  | 1.1 | W   |
| 8-Jan-2017 | 9:00  | 1.5 | WNW |
| 8-Jan-2017 | 10:00 | 2.3 | W   |
| 8-Jan-2017 | 11:00 | 2.2 | W   |
| 8-Jan-2017 | 12:00 | 2.6 | NE  |
| 8-Jan-2017 | 13:00 | 2.5 | WNW |
| 8-Jan-2017 | 14:00 | 2.6 | ENE |
| 8-Jan-2017 | 15:00 | 2.8 | NE  |

| 8-Jan-2017 17:00 1.5 ENE 8-Jan-2017 18:00 1.6 SW 8-Jan-2017 19:00 1.5 N 8-Jan-2017 20:00 1.2 N 8-Jan-2017 21:00 1.3 N 8-Jan-2017 22:00 1 N 8-Jan-2017 23:00 1.3 N 9-Jan-2017 1:00 1.4 NE 9-Jan-2017 1:00 1.4 NE 9-Jan-2017 2:00 1.1 N 9-Jan-2017 3:00 1.2 NNE 9-Jan-2017 3:00 1.2 NNE 9-Jan-2017 4:00 1 N 9-Jan-2017 5:00 1.1 N 9-Jan-2017 5:00 1.1 N 9-Jan-2017 5:00 1.1 N 9-Jan-2017 7:00 0.9 W 9-Jan-2017 8:00 1.1 WSW 9-Jan-2017 9:00 2.1 N 9-Jan-2017 9:00 2.1 N 9-Jan-2017 1:00 2.8 N 9-Jan-2017 1:00 2.5 N 9-Jan-2017 1:00 2.5 N 9-Jan-2017 1:00 2.5 N 9-Jan-2017 1:00 2.1 NNE 9-Jan-2017 1:00 1.9 ENE 9-Jan-2017 1:00 1.9 ENE 9-Jan-2017 1:00 1.3 W 9-Jan-2017 1:00 1.3 W 9-Jan-2017 1:00 1.3 W 9-Jan-2017 2:00 0.9 NNE                                                                                                                                  | 8-Jan-2017  | 16:00 | 2.1 | ENE |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------|-----|-----|
| 8-Jan-2017         18:00         1.6         SW           8-Jan-2017         19:00         1.5         N           8-Jan-2017         20:00         1.2         N           8-Jan-2017         21:00         1.3         N           8-Jan-2017         22:00         1         N           8-Jan-2017         23:00         1.3         N           9-Jan-2017         0:00         1.8         N           9-Jan-2017         1:00         1.4         NE           9-Jan-2017         2:00         1.1         N           9-Jan-2017         3:00         1.2         NNE           9-Jan-2017         4:00         1         N           9-Jan-2017         5:00         1.1         N           9-Jan-2017         5:00         1.1         N           9-Jan-2017         6:00         1         NNW           9-Jan-2017         8:00         1.1         WSW           9-Jan-2017         9:00         2.1         N           9-Jan-2017         10:00         2.8         N           9-Jan-2017         11:00         2.5         N           9-Jan-2017         13:00                                                       |             |       |     |     |
| 8-Jan-2017         19:00         1.5         N           8-Jan-2017         20:00         1.2         N           8-Jan-2017         21:00         1.3         N           8-Jan-2017         22:00         1         N           8-Jan-2017         23:00         1.3         N           9-Jan-2017         0:00         1.8         N           9-Jan-2017         1:00         1.4         NE           9-Jan-2017         2:00         1.1         N           9-Jan-2017         3:00         1.2         NNE           9-Jan-2017         4:00         1         N           9-Jan-2017         5:00         1.1         N           9-Jan-2017         6:00         1         NNW           9-Jan-2017         7:00         0.9         W           9-Jan-2017         8:00         1.1         WSW           9-Jan-2017         9:00         2.1         N           9-Jan-2017         10:00         2.8         N           9-Jan-2017         11:00         2.5         N           9-Jan-2017         13:00         2.5         N           9-Jan-2017         15:00         2                                              |             |       |     |     |
| 8-Jan-2017         20:00         1.2         N           8-Jan-2017         21:00         1.3         N           8-Jan-2017         22:00         1         N           8-Jan-2017         23:00         1.3         N           9-Jan-2017         0:00         1.8         N           9-Jan-2017         1:00         1.4         NE           9-Jan-2017         2:00         1.1         N           9-Jan-2017         3:00         1.2         NNE           9-Jan-2017         4:00         1         N           9-Jan-2017         5:00         1.1         N           9-Jan-2017         5:00         1.1         N           9-Jan-2017         6:00         1         NNW           9-Jan-2017         8:00         1.1         WSW           9-Jan-2017         9:00         2.1         N           9-Jan-2017         10:00         2.8         N           9-Jan-2017         10:00         2.8         N           9-Jan-2017         11:00         2.5         N           9-Jan-2017         13:00         2.5         N           9-Jan-2017         15:00         2                                              |             |       |     |     |
| 8-Jan-2017         21:00         1.3         N           8-Jan-2017         22:00         1         N           8-Jan-2017         23:00         1.3         N           9-Jan-2017         0:00         1.8         N           9-Jan-2017         1:00         1.4         NE           9-Jan-2017         2:00         1.1         N           9-Jan-2017         3:00         1.2         NNE           9-Jan-2017         4:00         1         N           9-Jan-2017         5:00         1.1         N           9-Jan-2017         5:00         1.1         N           9-Jan-2017         6:00         1         NNW           9-Jan-2017         7:00         0.9         W           9-Jan-2017         9:00         2.1         N           9-Jan-2017         9:00         2.1         N           9-Jan-2017         10:00         2.8         N           9-Jan-2017         11:00         2.5         N           9-Jan-2017         12:00         2.5         N           9-Jan-2017         14:00         2.1         NNE           9-Jan-2017         15:00         2.                                              |             |       |     |     |
| 8-Jan-2017       22:00       1       N         8-Jan-2017       23:00       1.3       N         9-Jan-2017       0:00       1.8       N         9-Jan-2017       1:00       1.4       NE         9-Jan-2017       2:00       1.1       N         9-Jan-2017       2:00       1.1       N         9-Jan-2017       3:00       1.2       NNE         9-Jan-2017       4:00       1       N         9-Jan-2017       5:00       1.1       N         9-Jan-2017       5:00       1.1       N         9-Jan-2017       6:00       1       NNW         9-Jan-2017       7:00       0.9       W         9-Jan-2017       8:00       1.1       WSW         9-Jan-2017       9:00       2.1       N         9-Jan-2017       10:00       2.8       N         9-Jan-2017       10:00       2.8       N         9-Jan-2017       10:00       2.5       N         9-Jan-2017       13:00       2.5       N         9-Jan-2017       15:00       2.1       N         9-Jan-2017       16:00       2       N <tr< td=""><td></td><td></td><td></td><td></td></tr<>                                                                                     |             |       |     |     |
| 8-Jan-2017       23:00       1.3       N         9-Jan-2017       0:00       1.8       N         9-Jan-2017       1:00       1.4       NE         9-Jan-2017       2:00       1.1       N         9-Jan-2017       2:00       1.1       N         9-Jan-2017       3:00       1.2       NNE         9-Jan-2017       4:00       1       N         9-Jan-2017       5:00       1.1       N         9-Jan-2017       6:00       1       NNW         9-Jan-2017       7:00       0.9       W         9-Jan-2017       8:00       1.1       WSW         9-Jan-2017       9:00       2.1       N         9-Jan-2017       10:00       2.8       N         9-Jan-2017       10:00       2.8       N         9-Jan-2017       11:00       2.5       N         9-Jan-2017       12:00       2.5       N         9-Jan-2017       13:00       2.3       N         9-Jan-2017       15:00       2.1       N         9-Jan-2017       16:00       2       N         9-Jan-2017       18:00       1.6       NE                                                                                                                                       | _           |       |     |     |
| 9-Jan-2017         0:00         1.8         N           9-Jan-2017         1:00         1.4         NE           9-Jan-2017         2:00         1.1         N           9-Jan-2017         3:00         1.2         NNE           9-Jan-2017         3:00         1.2         NNE           9-Jan-2017         4:00         1         N           9-Jan-2017         5:00         1.1         N           9-Jan-2017         6:00         1         NNW           9-Jan-2017         7:00         0.9         W           9-Jan-2017         8:00         1.1         WSW           9-Jan-2017         9:00         2.1         N           9-Jan-2017         10:00         2.8         N           9-Jan-2017         11:00         2.5         N           9-Jan-2017         12:00         2.5         N           9-Jan-2017         13:00         2.3         N           9-Jan-2017         15:00         2.1         NNE           9-Jan-2017         15:00         2.1         N           9-Jan-2017         16:00         2         N           9-Jan-2017         18:00 <t< td=""><td></td><td></td><td></td><td></td></t<> |             |       |     |     |
| 9-Jan-2017 1:00 1.4 NE 9-Jan-2017 2:00 1.1 N 9-Jan-2017 3:00 1.2 NNE 9-Jan-2017 4:00 1 N 9-Jan-2017 5:00 1.1 N 9-Jan-2017 6:00 1 NNW 9-Jan-2017 7:00 0.9 W 9-Jan-2017 8:00 1.1 WSW 9-Jan-2017 9:00 2.1 N 9-Jan-2017 9:00 2.8 N 9-Jan-2017 11:00 2.8 N 9-Jan-2017 12:00 2.5 N 9-Jan-2017 13:00 2.3 N 9-Jan-2017 14:00 2.1 NNE 9-Jan-2017 15:00 2.1 NNE 9-Jan-2017 15:00 2.1 NNE 9-Jan-2017 15:00 2.1 NNE 9-Jan-2017 16:00 2 N 9-Jan-2017 16:00 2 N 9-Jan-2017 16:00 1.9 ENE 9-Jan-2017 17:00 1.9 ENE 9-Jan-2017 19:00 1.3 W 9-Jan-2017 19:00 1.3 W 9-Jan-2017 19:00 1.3 W 9-Jan-2017 20:00 0.9 NNE 9-Jan-2017 21:00 1 WSW 9-Jan-2017 21:00 1 WSW                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |             |       |     |     |
| 9-Jan-2017         2:00         1.1         N           9-Jan-2017         3:00         1.2         NNE           9-Jan-2017         4:00         1         N           9-Jan-2017         5:00         1.1         N           9-Jan-2017         6:00         1         NNW           9-Jan-2017         7:00         0.9         W           9-Jan-2017         8:00         1.1         WSW           9-Jan-2017         9:00         2.1         N           9-Jan-2017         10:00         2.8         N           9-Jan-2017         11:00         2.5         N           9-Jan-2017         12:00         2.5         N           9-Jan-2017         13:00         2.3         N           9-Jan-2017         14:00         2.1         NNE           9-Jan-2017         15:00         2.1         N           9-Jan-2017         16:00         2         N           9-Jan-2017         19:00         1.3         W           9-Jan-2017         19:00         1.3         W           9-Jan-2017         20:00         0.9         NNE           9-Jan-2017         20:00                                                   | _           |       |     |     |
| 9-Jan-2017         3:00         1.2         NNE           9-Jan-2017         4:00         1         N           9-Jan-2017         5:00         1.1         N           9-Jan-2017         6:00         1         NNW           9-Jan-2017         7:00         0.9         W           9-Jan-2017         8:00         1.1         WSW           9-Jan-2017         9:00         2.1         N           9-Jan-2017         10:00         2.8         N           9-Jan-2017         11:00         2.5         N           9-Jan-2017         12:00         2.5         N           9-Jan-2017         13:00         2.3         N           9-Jan-2017         14:00         2.1         NNE           9-Jan-2017         15:00         2.1         N           9-Jan-2017         16:00         2         N           9-Jan-2017         18:00         1.6         NE           9-Jan-2017         19:00         1.3         W           9-Jan-2017         20:00         0.9         NNE           9-Jan-2017         20:00         1         WSW           9-Jan-2017         22:00                                                 |             | 1:00  | 1.4 | NE  |
| 9-Jan-2017         4:00         1         N           9-Jan-2017         5:00         1.1         N           9-Jan-2017         6:00         1         NNW           9-Jan-2017         7:00         0.9         W           9-Jan-2017         8:00         1.1         WSW           9-Jan-2017         9:00         2.1         N           9-Jan-2017         10:00         2.8         N           9-Jan-2017         11:00         2.5         N           9-Jan-2017         12:00         2.5         N           9-Jan-2017         13:00         2.3         N           9-Jan-2017         14:00         2.1         NNE           9-Jan-2017         15:00         2.1         N           9-Jan-2017         16:00         2         N           9-Jan-2017         17:00         1.9         ENE           9-Jan-2017         19:00         1.3         W           9-Jan-2017         20:00         0.9         NNE           9-Jan-2017         21:00         1         WSW           9-Jan-2017         21:00         1         WSW           9-Jan-2017         23:00                                                 | 9-Jan-2017  | 2:00  | 1.1 | N   |
| 9-Jan-2017         5:00         1.1         N           9-Jan-2017         6:00         1         NNW           9-Jan-2017         7:00         0.9         W           9-Jan-2017         8:00         1.1         WSW           9-Jan-2017         9:00         2.1         N           9-Jan-2017         10:00         2.8         N           9-Jan-2017         11:00         2.5         N           9-Jan-2017         12:00         2.5         N           9-Jan-2017         13:00         2.3         N           9-Jan-2017         14:00         2.1         NNE           9-Jan-2017         15:00         2.1         N           9-Jan-2017         16:00         2         N           9-Jan-2017         17:00         1.9         ENE           9-Jan-2017         19:00         1.3         W           9-Jan-2017         20:00         0.9         NNE           9-Jan-2017         21:00         1         WSW           9-Jan-2017         21:00         1         WSW           9-Jan-2017         23:00         1.1         NE                                                                                | 9-Jan-2017  | 3:00  | 1.2 | NNE |
| 9-Jan-2017       6:00       1       NNW         9-Jan-2017       7:00       0.9       W         9-Jan-2017       8:00       1.1       WSW         9-Jan-2017       9:00       2.1       N         9-Jan-2017       10:00       2.8       N         9-Jan-2017       11:00       2.5       N         9-Jan-2017       12:00       2.5       N         9-Jan-2017       13:00       2.3       N         9-Jan-2017       14:00       2.1       NNE         9-Jan-2017       15:00       2.1       N         9-Jan-2017       16:00       2       N         9-Jan-2017       18:00       1.6       NE         9-Jan-2017       19:00       1.3       W         9-Jan-2017       20:00       0.9       NNE         9-Jan-2017       21:00       1       WSW         9-Jan-2017       22:00       1       W         9-Jan-2017       23:00       1.1       NE                                                                                                                                                                                                                                                                                 | 9-Jan-2017  | 4:00  | 1   | N   |
| 9-Jan-2017       7:00       0.9       W         9-Jan-2017       8:00       1.1       WSW         9-Jan-2017       9:00       2.1       N         9-Jan-2017       10:00       2.8       N         9-Jan-2017       11:00       2.5       N         9-Jan-2017       12:00       2.5       N         9-Jan-2017       13:00       2.3       N         9-Jan-2017       14:00       2.1       NNE         9-Jan-2017       15:00       2.1       N         9-Jan-2017       16:00       2       N         9-Jan-2017       17:00       1.9       ENE         9-Jan-2017       18:00       1.6       NE         9-Jan-2017       19:00       1.3       W         9-Jan-2017       20:00       0.9       NNE         9-Jan-2017       21:00       1       WSW         9-Jan-2017       22:00       1       W         9-Jan-2017       23:00       1.1       NE                                                                                                                                                                                                                                                                              | 9-Jan-2017  | 5:00  | 1.1 | N   |
| 9-Jan-2017       8:00       1.1       WSW         9-Jan-2017       9:00       2.1       N         9-Jan-2017       10:00       2.8       N         9-Jan-2017       11:00       2.5       N         9-Jan-2017       12:00       2.5       N         9-Jan-2017       13:00       2.3       N         9-Jan-2017       14:00       2.1       NNE         9-Jan-2017       15:00       2.1       N         9-Jan-2017       16:00       2       N         9-Jan-2017       17:00       1.9       ENE         9-Jan-2017       18:00       1.6       NE         9-Jan-2017       19:00       1.3       W         9-Jan-2017       20:00       0.9       NNE         9-Jan-2017       21:00       1       WSW         9-Jan-2017       22:00       1       W         9-Jan-2017       23:00       1.1       NE                                                                                                                                                                                                                                                                                                                              | 9-Jan-2017  | 6:00  | 1   | NNW |
| 9-Jan-2017       9:00       2.1       N         9-Jan-2017       10:00       2.8       N         9-Jan-2017       11:00       2.5       N         9-Jan-2017       12:00       2.5       N         9-Jan-2017       13:00       2.3       N         9-Jan-2017       14:00       2.1       NNE         9-Jan-2017       15:00       2.1       N         9-Jan-2017       16:00       2       N         9-Jan-2017       17:00       1.9       ENE         9-Jan-2017       18:00       1.6       NE         9-Jan-2017       19:00       1.3       W         9-Jan-2017       20:00       0.9       NNE         9-Jan-2017       21:00       1       WSW         9-Jan-2017       22:00       1       W         9-Jan-2017       23:00       1.1       NE                                                                                                                                                                                                                                                                                                                                                                                | 9-Jan-2017  | 7:00  | 0.9 | W   |
| 9-Jan-2017       10:00       2.8       N         9-Jan-2017       11:00       2.5       N         9-Jan-2017       12:00       2.5       N         9-Jan-2017       13:00       2.3       N         9-Jan-2017       14:00       2.1       NNE         9-Jan-2017       15:00       2.1       N         9-Jan-2017       16:00       2       N         9-Jan-2017       17:00       1.9       ENE         9-Jan-2017       18:00       1.6       NE         9-Jan-2017       19:00       1.3       W         9-Jan-2017       20:00       0.9       NNE         9-Jan-2017       21:00       1       WSW         9-Jan-2017       22:00       1       W         9-Jan-2017       23:00       1.1       NE                                                                                                                                                                                                                                                                                                                                                                                                                                | 9-Jan-2017  | 8:00  | 1.1 | WSW |
| 9-Jan-2017       11:00       2.5       N         9-Jan-2017       12:00       2.5       N         9-Jan-2017       13:00       2.3       N         9-Jan-2017       14:00       2.1       NNE         9-Jan-2017       15:00       2.1       N         9-Jan-2017       16:00       2       N         9-Jan-2017       17:00       1.9       ENE         9-Jan-2017       18:00       1.6       NE         9-Jan-2017       19:00       1.3       W         9-Jan-2017       20:00       0.9       NNE         9-Jan-2017       21:00       1       WSW         9-Jan-2017       22:00       1       W         9-Jan-2017       23:00       1.1       NE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 9-Jan-2017  | 9:00  | 2.1 | N   |
| 9-Jan-2017       12:00       2.5       N         9-Jan-2017       13:00       2.3       N         9-Jan-2017       14:00       2.1       NNE         9-Jan-2017       15:00       2.1       N         9-Jan-2017       16:00       2       N         9-Jan-2017       17:00       1.9       ENE         9-Jan-2017       18:00       1.6       NE         9-Jan-2017       19:00       1.3       W         9-Jan-2017       20:00       0.9       NNE         9-Jan-2017       21:00       1       WSW         9-Jan-2017       22:00       1       W         9-Jan-2017       23:00       1.1       NE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 9-Jan-2017  | 10:00 | 2.8 | N   |
| 9-Jan-2017       13:00       2.3       N         9-Jan-2017       14:00       2.1       NNE         9-Jan-2017       15:00       2.1       N         9-Jan-2017       16:00       2       N         9-Jan-2017       17:00       1.9       ENE         9-Jan-2017       18:00       1.6       NE         9-Jan-2017       19:00       1.3       W         9-Jan-2017       20:00       0.9       NNE         9-Jan-2017       21:00       1       WSW         9-Jan-2017       22:00       1       W         9-Jan-2017       23:00       1.1       NE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 9-Jan-2017  | 11:00 | 2.5 | N   |
| 9-Jan-2017       14:00       2.1       NNE         9-Jan-2017       15:00       2.1       N         9-Jan-2017       16:00       2       N         9-Jan-2017       17:00       1.9       ENE         9-Jan-2017       18:00       1.6       NE         9-Jan-2017       19:00       1.3       W         9-Jan-2017       20:00       0.9       NNE         9-Jan-2017       21:00       1       WSW         9-Jan-2017       22:00       1       W         9-Jan-2017       23:00       1.1       NE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 9-Jan-2017  | 12:00 | 2.5 | N   |
| 9-Jan-2017       15:00       2.1       N         9-Jan-2017       16:00       2       N         9-Jan-2017       17:00       1.9       ENE         9-Jan-2017       18:00       1.6       NE         9-Jan-2017       19:00       1.3       W         9-Jan-2017       20:00       0.9       NNE         9-Jan-2017       21:00       1       WSW         9-Jan-2017       22:00       1       W         9-Jan-2017       23:00       1.1       NE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 9-Jan-2017  | 13:00 | 2.3 | N   |
| 9-Jan-2017       16:00       2       N         9-Jan-2017       17:00       1.9       ENE         9-Jan-2017       18:00       1.6       NE         9-Jan-2017       19:00       1.3       W         9-Jan-2017       20:00       0.9       NNE         9-Jan-2017       21:00       1       WSW         9-Jan-2017       22:00       1       W         9-Jan-2017       23:00       1.1       NE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 9-Jan-2017  | 14:00 | 2.1 | NNE |
| 9-Jan-2017       17:00       1.9       ENE         9-Jan-2017       18:00       1.6       NE         9-Jan-2017       19:00       1.3       W         9-Jan-2017       20:00       0.9       NNE         9-Jan-2017       21:00       1       WSW         9-Jan-2017       22:00       1       W         9-Jan-2017       23:00       1.1       NE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 9-Jan-2017  | 15:00 | 2.1 | N   |
| 9-Jan-2017       18:00       1.6       NE         9-Jan-2017       19:00       1.3       W         9-Jan-2017       20:00       0.9       NNE         9-Jan-2017       21:00       1       WSW         9-Jan-2017       22:00       1       W         9-Jan-2017       23:00       1.1       NE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 9-Jan-2017  | 16:00 | 2   | N   |
| 9-Jan-2017       19:00       1.3       W         9-Jan-2017       20:00       0.9       NNE         9-Jan-2017       21:00       1       WSW         9-Jan-2017       22:00       1       W         9-Jan-2017       23:00       1.1       NE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 9-Jan-2017  | 17:00 | 1.9 | ENE |
| 9-Jan-2017     20:00     0.9     NNE       9-Jan-2017     21:00     1     WSW       9-Jan-2017     22:00     1     W       9-Jan-2017     23:00     1.1     NE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 9-Jan-2017  | 18:00 | 1.6 | NE  |
| 9-Jan-2017     21:00     1     WSW       9-Jan-2017     22:00     1     W       9-Jan-2017     23:00     1.1     NE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 9-Jan-2017  | 19:00 | 1.3 | W   |
| 9-Jan-2017 22:00 1 W<br>9-Jan-2017 23:00 1.1 NE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 9-Jan-2017  | 20:00 | 0.9 | NNE |
| 9-Jan-2017 22:00 1 W<br>9-Jan-2017 23:00 1.1 NE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 9-Jan-2017  | 21:00 | 1   | WSW |
| 9-Jan-2017 23:00 1.1 NE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 9-Jan-2017  | 22:00 | 1   | W   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |             |       | 1.1 | NE  |
| 10-Jan-∠017   0:00   1.2   NNE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 10-Jan-2017 | 0:00  | 1.2 | NNE |
| 10-Jan-2017 1:00 1.7 N                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |             |       |     |     |
| 10-Jan-2017 2:00 1.9 N                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | _           |       |     |     |
| 10-Jan-2017 3:00 1.5 NNE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |             |       |     |     |
| 10-Jan-2017 4:00 1.8 N                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |             |       |     |     |

|             |       | _   |     |
|-------------|-------|-----|-----|
| 10-Jan-2017 | 5:00  | 2.1 | N   |
| 10-Jan-2017 | 6:00  | 2.3 | NNE |
| 10-Jan-2017 | 7:00  | 2.4 | NE  |
| 10-Jan-2017 | 8:00  | 2.5 | N   |
| 10-Jan-2017 | 9:00  | 2.3 | Е   |
| 10-Jan-2017 | 10:00 | 2.5 | SW  |
| 10-Jan-2017 | 11:00 | 2.4 | ENE |
| 10-Jan-2017 | 12:00 | 2.4 | NE  |
| 10-Jan-2017 | 13:00 | 2.6 | NE  |
| 10-Jan-2017 | 14:00 | 2.6 | ENE |
| 10-Jan-2017 | 15:00 | 2.5 | NE  |
| 10-Jan-2017 | 16:00 | 2.5 | NE  |
| 10-Jan-2017 | 17:00 | 2.7 | ENE |
| 10-Jan-2017 | 18:00 | 2.3 | ENE |
| 10-Jan-2017 | 19:00 | 2.1 | N   |
| 10-Jan-2017 | 20:00 | 1.9 | NE  |
| 10-Jan-2017 | 21:00 | 1.6 | NNE |
| 10-Jan-2017 | 22:00 | 1.1 | WSW |
| 10-Jan-2017 | 23:00 | 1.6 | W   |
| 11-Jan-2017 | 0:00  | 2.2 | W   |
| 11-Jan-2017 | 1:00  | 1.9 | WNW |
| 11-Jan-2017 | 2:00  | 2.3 | ESE |
| 11-Jan-2017 | 3:00  | 1.2 | WSW |
| 11-Jan-2017 | 4:00  | 1.2 | NE  |
| 11-Jan-2017 | 5:00  | 2.3 | NW  |
| 11-Jan-2017 | 6:00  | 2.1 | NNE |
| 11-Jan-2017 | 7:00  | 1.6 | NE  |
| 11-Jan-2017 | 8:00  | 1.7 | N   |
| 11-Jan-2017 | 9:00  | 2   | SSW |
| 11-Jan-2017 | 10:00 | 2.2 | ESE |
| 11-Jan-2017 | 11:00 | 2.6 | ESE |
| 11-Jan-2017 | 12:00 | 3.3 | W   |
| 11-Jan-2017 | 13:00 | 2.9 | WNW |
| 11-Jan-2017 | 14:00 | 2.7 | SSE |
| 11-Jan-2017 | 15:00 | 2.9 | NW  |
| 11-Jan-2017 | 16:00 | 2.8 | WNW |
| 11-Jan-2017 | 17:00 | 2.9 | WSW |
|             |       |     |     |

| 11-Jan-2017 | 18:00 | 2.3 | W   |
|-------------|-------|-----|-----|
| 11-Jan-2017 | 19:00 | 1.3 | W   |
| 11-Jan-2017 | 20:00 | 2   | W   |
| 11-Jan-2017 | 21:00 | 2.3 | WSW |
| 11-Jan-2017 | 22:00 | 1.8 | SSE |
| 11-Jan-2017 | 23:00 | 1.7 | W   |
| 12-Jan-2017 | 0:00  | 1.5 | W   |
| 12-Jan-2017 | 1:00  | 1.6 | W   |
| 12-Jan-2017 | 2:00  | 1.3 | WNW |
| 12-Jan-2017 | 3:00  | 1.4 | WNW |
| 12-Jan-2017 | 4:00  | 1.1 | WNW |
| 12-Jan-2017 | 5:00  | 1.2 | W   |
| 12-Jan-2017 | 6:00  | 0.8 | W   |
| 12-Jan-2017 | 7:00  | 0.7 | W   |
| 12-Jan-2017 | 8:00  | 1   | WSW |
| 12-Jan-2017 | 9:00  | 1   | WSW |
| 12-Jan-2017 | 10:00 | 1.7 | WSW |
| 12-Jan-2017 | 11:00 | 2.2 | NNE |
| 12-Jan-2017 | 12:00 | 2.4 | SSE |
| 12-Jan-2017 | 13:00 | 2.5 | NE  |
| 12-Jan-2017 | 14:00 | 2.3 | NE  |
| 12-Jan-2017 | 15:00 | 2   | ESE |
| 12-Jan-2017 | 16:00 | 2   | ENE |
| 12-Jan-2017 | 17:00 | 2.2 | ENE |
| 12-Jan-2017 | 18:00 | 1.8 | NNE |
| 12-Jan-2017 | 19:00 | 1.6 | NNE |
| 12-Jan-2017 | 20:00 | 1.1 | NNE |
| 12-Jan-2017 | 21:00 | 0.9 | NNE |
| 12-Jan-2017 | 22:00 | 0.8 | ENE |
| 12-Jan-2017 | 23:00 | 0.9 | ENE |
| 13-Jan-2017 | 0:00  | 0.8 | ENE |
| 13-Jan-2017 | 1:00  | 0.8 | SSE |
| 13-Jan-2017 | 2:00  | 0.9 | NE  |
| 13-Jan-2017 | 3:00  | 0.8 | ENE |
| 13-Jan-2017 | 4:00  | 0.8 | ENE |
| 13-Jan-2017 | 5:00  | 0.8 | ENE |
| 13-Jan-2017 | 6:00  | 0.9 | ENE |
|             | •     | *   |     |

| 13-Jan-2017 | 7:00     | 0.8 | ENE |
|-------------|----------|-----|-----|
| 13-Jan-2017 | 8:00     | 0.9 | ESE |
| 13-Jan-2017 | 9:00     | 1.3 | ESE |
| 13-Jan-2017 | 10:00    | 1.7 | ENE |
| 13-Jan-2017 | 11:00    | 1.6 | ENE |
| 13-Jan-2017 | 12:00    | 2.3 | NNE |
| 13-Jan-2017 | 13:00    | 2.2 | NNE |
| 13-Jan-2017 | 14:00    | 2.4 | NE  |
| 13-Jan-2017 | 15:00    | 2.4 | NNE |
| 13-Jan-2017 | 16:00    | 2.2 | SSE |
| 13-Jan-2017 | 17:00    | 2.1 | ESE |
| 13-Jan-2017 | 18:00    | 1.7 | Е   |
| 13-Jan-2017 | 19:00    | 1.4 | NNE |
| 13-Jan-2017 | 20:00    | 0.9 | ENE |
| 13-Jan-2017 | 21:00    | 1.1 | ENE |
| 13-Jan-2017 | 22:00    | 0.8 | NE  |
| 13-Jan-2017 | 23:00    | 0.9 | ENE |
| 14-Jan-2017 | 0:00     | 1   | NNE |
| 14-Jan-2017 | 1:00     | 0.9 | ENE |
| 14-Jan-2017 | 2:00     | 0.9 | SSE |
| 14-Jan-2017 | 3:00     | 1   | S   |
| 14-Jan-2017 | 4:00     | 0.7 | ESE |
| 14-Jan-2017 | 5:00     | 0.8 | SE  |
| 14-Jan-2017 | 6:00     | 0.6 | SSW |
| 14-Jan-2017 | 7:00     | 0.7 | SSE |
| 14-Jan-2017 | 8:00     | 1   | SSE |
| 14-Jan-2017 | 9:00     | 1.3 | S   |
| 14-Jan-2017 | 10:00    | 2.1 | SSW |
| 14-Jan-2017 | 11:00    | 2.3 | SSW |
| 14-Jan-2017 | 12:00    | 2.9 | SW  |
| 14-Jan-2017 | 13:00    | 2.4 | ESE |
| 14-Jan-2017 | 14:00    | 2.6 | ENE |
| 14-Jan-2017 | 15:00    | 2.9 | NNW |
| 14-Jan-2017 | 16:00    | 2.1 | ENE |
| 14-Jan-2017 | 17:00    | 1.8 | ENE |
| 14-Jan-2017 | 18:00    | 1.7 | ENE |
| 14-Jan-2017 | 19:00    | 1.6 | SSE |
| L           | <u> </u> | 1   |     |

| 14-Jan-2017 | 20:00 | 1.4 | ESE |
|-------------|-------|-----|-----|
| 14-Jan-2017 | 21:00 | 1.9 | SE  |
| 14-Jan-2017 | 22:00 | 1.5 | ENE |
| 14-Jan-2017 | 23:00 | 0.9 | SSE |
| 15-Jan-2017 | 0:00  | 1.3 | Е   |
| 15-Jan-2017 | 1:00  | 0.9 | ESE |
| 15-Jan-2017 | 2:00  | 1.1 | ENE |
| 15-Jan-2017 | 3:00  | 1.4 | N   |
| 15-Jan-2017 | 4:00  | 1.4 | ENE |
| 15-Jan-2017 | 5:00  | 1.6 | ENE |
| 15-Jan-2017 | 6:00  | 1.9 | NE  |
| 15-Jan-2017 | 7:00  | 1.9 | NE  |
| 15-Jan-2017 | 8:00  | 1.8 | ENE |
| 15-Jan-2017 | 9:00  | 2.4 | SE  |
| 15-Jan-2017 | 10:00 | 2.6 | SSE |
| 15-Jan-2017 | 11:00 | 2.7 | E   |
| 15-Jan-2017 | 12:00 | 3   | ESE |
| 15-Jan-2017 | 13:00 | 2.8 | Е   |
| 15-Jan-2017 | 14:00 | 2.5 | SE  |
| 15-Jan-2017 | 15:00 | 2.6 | S   |
| 15-Jan-2017 | 16:00 | 3   | S   |
| 15-Jan-2017 | 17:00 | 2.6 | SSE |
| 15-Jan-2017 | 18:00 | 2.3 | ESE |
| 15-Jan-2017 | 19:00 | 2   | SE  |
| 15-Jan-2017 | 20:00 | 1.6 | SE  |
| 15-Jan-2017 | 21:00 | 1.3 | SSE |
| 15-Jan-2017 | 22:00 | 1.6 | SSE |
| 15-Jan-2017 | 23:00 | 1.3 | SSE |
| 16-Jan-2017 | 0:00  | 1.1 | SSE |
| 16-Jan-2017 | 1:00  | 1.2 | Е   |
| 16-Jan-2017 | 2:00  | 1   | Е   |
| 16-Jan-2017 | 3:00  | 0.9 | Е   |
| 16-Jan-2017 | 4:00  | 1.1 | Е   |
| 16-Jan-2017 | 5:00  | 1.4 | Е   |
| 16-Jan-2017 | 6:00  | 0.8 | Е   |
| 16-Jan-2017 | 7:00  | 1.2 | Е   |
| 16-Jan-2017 | 8:00  | 1.1 | NE  |
| <u> </u>    | i     | 1   | i . |

| 16-Jan-2017         10:00         2         NNE           16-Jan-2017         11:00         1.9         NE           16-Jan-2017         12:00         2.3         ENE           16-Jan-2017         13:00         2.5         ENE           16-Jan-2017         14:00         2.5         NE           16-Jan-2017         15:00         2.4         NNE           16-Jan-2017         16:00         2.1         NE           16-Jan-2017         16:00         2.1         NE           16-Jan-2017         17:00         2         NE           16-Jan-2017         19:00         1.4         E           16-Jan-2017         20:00         1.3         E           16-Jan-2017         20:00         1.3         E           16-Jan-2017         20:00         1         NE           16-Jan-2017         20:00         1         NE           16-Jan-2017         20:00         1         NE           16-Jan-2017         20:00         1         NE           17-Jan-2017         20:00         1         NE           17-Jan-2017         1:00         1.3         N           17-Jan-2017                                                                     | 16-Jan-2017 | 9:00  | 1.8 | NE  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------|-----|-----|
| 16-Jan-2017         11:00         1.9         NE           16-Jan-2017         12:00         2.3         ENE           16-Jan-2017         13:00         2.5         ENE           16-Jan-2017         14:00         2.5         NE           16-Jan-2017         15:00         2.4         NNE           16-Jan-2017         16:00         2.1         NE           16-Jan-2017         17:00         2         NE           16-Jan-2017         18:00         1.7         NE           16-Jan-2017         19:00         1.4         E           16-Jan-2017         20:00         1.3         E           16-Jan-2017         20:00         1.2         W           16-Jan-2017         20:00         1         NE           16-Jan-2017         20:00         1         NE           16-Jan-2017         20:00         1         NE           17-Jan-2017         20:00         1         NE           17-Jan-2017         0:00         1.1         NE           17-Jan-2017         1:00         1.3         N           17-Jan-2017         3:00         1.3         N           17-Jan-2017                                                                     |             |       |     |     |
| 16-Jan-2017         12:00         2.3         ENE           16-Jan-2017         13:00         2.5         ENE           16-Jan-2017         14:00         2.5         NE           16-Jan-2017         15:00         2.4         NNE           16-Jan-2017         16:00         2.1         NE           16-Jan-2017         16:00         2.1         NE           16-Jan-2017         16:00         1.7         NE           16-Jan-2017         18:00         1.7         NE           16-Jan-2017         19:00         1.4         E           16-Jan-2017         20:00         1.3         E           16-Jan-2017         21:00         1.2         W           16-Jan-2017         22:00         1         NE           16-Jan-2017         23:00         0.9         NNE           17-Jan-2017         0:00         1.1         NE           17-Jan-2017         1:00         1.3         N           17-Jan-2017         1:00         1.3         N           17-Jan-2017         3:00         1.3         NNE           17-Jan-2017         4:00         1.1         N           17-Jan-2017 <td></td> <td></td> <td></td> <td></td>                      |             |       |     |     |
| 16-Jan-2017         13:00         2.5         ENE           16-Jan-2017         14:00         2.5         NE           16-Jan-2017         15:00         2.4         NNE           16-Jan-2017         16:00         2.1         NE           16-Jan-2017         17:00         2         NE           16-Jan-2017         18:00         1.7         NE           16-Jan-2017         19:00         1.4         E           16-Jan-2017         20:00         1.3         E           16-Jan-2017         21:00         1.2         W           16-Jan-2017         21:00         1.2         W           16-Jan-2017         22:00         1         NE           16-Jan-2017         23:00         0.9         NNE           17-Jan-2017         1:00         1.3         N           17-Jan-2017         1:00         1.3         N           17-Jan-2017         1:00         1.3         N           17-Jan-2017         1:00         1.3         N           17-Jan-2017         4:00         1.1         N           17-Jan-2017         5:00         1.3         NNE           17-Jan-2017                                                                     |             |       | -   |     |
| 16-Jan-2017         14:00         2.5         NE           16-Jan-2017         15:00         2.4         NNE           16-Jan-2017         16:00         2.1         NE           16-Jan-2017         17:00         2         NE           16-Jan-2017         18:00         1.7         NE           16-Jan-2017         19:00         1.4         E           16-Jan-2017         20:00         1.3         E           16-Jan-2017         21:00         1.2         W           16-Jan-2017         22:00         1         NE           16-Jan-2017         23:00         0.9         NNE           17-Jan-2017         0:00         1.1         NE           17-Jan-2017         1:00         1.3         N           17-Jan-2017         1:00         1.3         N           17-Jan-2017         1:00         1.3         N           17-Jan-2017         1:00         1.3         N           17-Jan-2017         4:00         1.1         N           17-Jan-2017         4:00         1.1         N           17-Jan-2017         5:00         1.3         N           17-Jan-2017 <t< td=""><td></td><td></td><td></td><td></td></t<>                      |             |       |     |     |
| 16-Jan-2017         15:00         2.4         NNE           16-Jan-2017         16:00         2.1         NE           16-Jan-2017         17:00         2         NE           16-Jan-2017         18:00         1.7         NE           16-Jan-2017         19:00         1.4         E           16-Jan-2017         20:00         1.3         E           16-Jan-2017         21:00         1.2         W           16-Jan-2017         22:00         1         NE           16-Jan-2017         23:00         0.9         NNE           17-Jan-2017         0:00         1.1         NE           17-Jan-2017         1:00         1.3         N           17-Jan-2017         1:00         1.3         N           17-Jan-2017         1:00         1.3         N           17-Jan-2017         2:00         1         N           17-Jan-2017         3:00         1.3         ENE           17-Jan-2017         4:00         1.1         N           17-Jan-2017         5:00         1.3         NNE           17-Jan-2017         6:00         1.3         N           17-Jan-2017 <t< td=""><td></td><td></td><td></td><td></td></t<>                      |             |       |     |     |
| 16-Jan-2017         16:00         2.1         NE           16-Jan-2017         17:00         2         NE           16-Jan-2017         18:00         1.7         NE           16-Jan-2017         19:00         1.4         E           16-Jan-2017         20:00         1.3         E           16-Jan-2017         21:00         1.2         W           16-Jan-2017         22:00         1         NE           16-Jan-2017         23:00         0.9         NNE           17-Jan-2017         0:00         1.1         NE           17-Jan-2017         1:00         1.3         N           17-Jan-2017         1:00         1.3         N           17-Jan-2017         2:00         1         N           17-Jan-2017         3:00         1.3         ENE           17-Jan-2017         4:00         1.1         N           17-Jan-2017         5:00         1.3         NNE           17-Jan-2017         7:00         1.3         N           17-Jan-2017         7:00         1.3         N           17-Jan-2017         9:00         1.8         NE           17-Jan-2017                                                                            |             |       |     |     |
| 16-Jan-2017         17:00         2         NE           16-Jan-2017         18:00         1.7         NE           16-Jan-2017         19:00         1.4         E           16-Jan-2017         20:00         1.3         E           16-Jan-2017         21:00         1.2         W           16-Jan-2017         22:00         1         NE           16-Jan-2017         23:00         0.9         NNE           17-Jan-2017         0:00         1.1         NE           17-Jan-2017         1:00         1.3         N           17-Jan-2017         2:00         1         N           17-Jan-2017         3:00         1.3         ENE           17-Jan-2017         4:00         1.1         N           17-Jan-2017         5:00         1.3         NNE           17-Jan-2017         5:00         1.3         N           17-Jan-2017         6:00         1.3         N           17-Jan-2017         7:00         1.3         N           17-Jan-2017         9:00         1.8         NE           17-Jan-2017         10:00         1.9         NNE           17-Jan-2017 <td< td=""><td></td><td></td><td></td><td></td></td<>                     |             |       |     |     |
| 16-Jan-2017         18:00         1.7         NE           16-Jan-2017         19:00         1.4         E           16-Jan-2017         20:00         1.3         E           16-Jan-2017         21:00         1.2         W           16-Jan-2017         22:00         1         NE           16-Jan-2017         23:00         0.9         NNE           17-Jan-2017         0:00         1.1         NE           17-Jan-2017         1:00         1.3         N           17-Jan-2017         2:00         1         N           17-Jan-2017         3:00         1.3         ENE           17-Jan-2017         4:00         1.1         N           17-Jan-2017         5:00         1.3         NNE           17-Jan-2017         5:00         1.3         N           17-Jan-2017         6:00         1.3         N           17-Jan-2017         8:00         2.1         N           17-Jan-2017         9:00         1.8         NE           17-Jan-2017         10:00         1.9         NNE           17-Jan-2017         11:00         2.6         NNE           17-Jan-2017                                                                        |             |       |     |     |
| 16-Jan-2017         19:00         1.4         E           16-Jan-2017         20:00         1.3         E           16-Jan-2017         21:00         1.2         W           16-Jan-2017         22:00         1         NE           16-Jan-2017         23:00         0.9         NNE           17-Jan-2017         0:00         1.1         NE           17-Jan-2017         1:00         1.3         N           17-Jan-2017         2:00         1         N           17-Jan-2017         3:00         1.3         ENE           17-Jan-2017         4:00         1.1         N           17-Jan-2017         5:00         1.3         NNE           17-Jan-2017         5:00         1.3         NNE           17-Jan-2017         6:00         1.3         N           17-Jan-2017         7:00         1.3         N           17-Jan-2017         8:00         2.1         N           17-Jan-2017         9:00         1.8         NE           17-Jan-2017         10:00         1.9         NNE           17-Jan-2017         12:00         2.5         NE           17-Jan-2017         <                                                               |             |       |     |     |
| 16-Jan-2017         20:00         1.3         E           16-Jan-2017         21:00         1.2         W           16-Jan-2017         22:00         1         NE           16-Jan-2017         23:00         0.9         NNE           17-Jan-2017         0:00         1.1         NE           17-Jan-2017         1:00         1.3         N           17-Jan-2017         2:00         1         N           17-Jan-2017         3:00         1.3         ENE           17-Jan-2017         4:00         1.1         N           17-Jan-2017         5:00         1.3         NNE           17-Jan-2017         6:00         1.3         N           17-Jan-2017         7:00         1.3         N           17-Jan-2017         7:00         1.3         N           17-Jan-2017         8:00         2.1         N           17-Jan-2017         9:00         1.8         NE           17-Jan-2017         10:00         1.9         NNE           17-Jan-2017         12:00         2.5         NE           17-Jan-2017         13:00         2.7         NE           17-Jan-2017 <t< td=""><td>16-Jan-2017</td><td>18:00</td><td>1.7</td><td>NE</td></t<> | 16-Jan-2017 | 18:00 | 1.7 | NE  |
| 16-Jan-2017         21:00         1.2         W           16-Jan-2017         22:00         1         NE           16-Jan-2017         23:00         0.9         NNE           17-Jan-2017         0:00         1.1         NE           17-Jan-2017         1:00         1.3         N           17-Jan-2017         2:00         1         N           17-Jan-2017         3:00         1.3         ENE           17-Jan-2017         4:00         1.1         N           17-Jan-2017         5:00         1.3         NNE           17-Jan-2017         6:00         1.3         N           17-Jan-2017         7:00         1.3         N           17-Jan-2017         8:00         2.1         N           17-Jan-2017         9:00         1.8         NE           17-Jan-2017         10:00         1.9         NNE           17-Jan-2017         11:00         2.6         NNE           17-Jan-2017         13:00         2.7         NE           17-Jan-2017         15:00         3         NNE           17-Jan-2017         16:00         2.8         NNE           17-Jan-2017                                                                      | 16-Jan-2017 | 19:00 | 1.4 | E   |
| 16-Jan-2017         22:00         1         NE           16-Jan-2017         23:00         0.9         NNE           17-Jan-2017         0:00         1.1         NE           17-Jan-2017         1:00         1.3         N           17-Jan-2017         2:00         1         N           17-Jan-2017         3:00         1.3         ENE           17-Jan-2017         4:00         1.1         N           17-Jan-2017         5:00         1.3         NNE           17-Jan-2017         6:00         1.3         N           17-Jan-2017         7:00         1.3         N           17-Jan-2017         8:00         2.1         N           17-Jan-2017         9:00         1.8         NE           17-Jan-2017         10:00         1.9         NNE           17-Jan-2017         11:00         2.6         NNE           17-Jan-2017         13:00         2.7         NE           17-Jan-2017         15:00         3         NNE           17-Jan-2017         16:00         2.8         NNE           17-Jan-2017         17:00         2.2         ENE           17-Jan-2017                                                                    | 16-Jan-2017 | 20:00 | 1.3 | E   |
| 16-Jan-2017         23:00         0.9         NNE           17-Jan-2017         0:00         1.1         NE           17-Jan-2017         1:00         1.3         N           17-Jan-2017         2:00         1         N           17-Jan-2017         3:00         1.3         ENE           17-Jan-2017         4:00         1.1         N           17-Jan-2017         5:00         1.3         NNE           17-Jan-2017         6:00         1.3         N           17-Jan-2017         7:00         1.3         N           17-Jan-2017         8:00         2.1         N           17-Jan-2017         9:00         1.8         NE           17-Jan-2017         10:00         1.9         NNE           17-Jan-2017         11:00         2.6         NNE           17-Jan-2017         13:00         2.7         NE           17-Jan-2017         14:00         2.6         NNE           17-Jan-2017         15:00         3         NNE           17-Jan-2017         16:00         2.8         NNE           17-Jan-2017         16:00         2.8         NNE           17-Jan-2017                                                                 | 16-Jan-2017 | 21:00 | 1.2 | W   |
| 17-Jan-2017         0:00         1.1         NE           17-Jan-2017         1:00         1.3         N           17-Jan-2017         2:00         1         N           17-Jan-2017         3:00         1.3         ENE           17-Jan-2017         4:00         1.1         N           17-Jan-2017         5:00         1.3         NNE           17-Jan-2017         6:00         1.3         N           17-Jan-2017         7:00         1.3         N           17-Jan-2017         8:00         2.1         N           17-Jan-2017         9:00         1.8         NE           17-Jan-2017         10:00         1.9         NNE           17-Jan-2017         11:00         2.6         NNE           17-Jan-2017         13:00         2.5         NE           17-Jan-2017         14:00         2.6         NNE           17-Jan-2017         15:00         3         NNE           17-Jan-2017         16:00         2.8         NNE           17-Jan-2017         16:00         2.8         NNE           17-Jan-2017         18:00         1.6         ENE           17-Jan-2017                                                                 | 16-Jan-2017 | 22:00 | 1   | NE  |
| 17-Jan-2017       1:00       1.3       N         17-Jan-2017       2:00       1       N         17-Jan-2017       3:00       1.3       ENE         17-Jan-2017       4:00       1.1       N         17-Jan-2017       5:00       1.3       NNE         17-Jan-2017       6:00       1.3       N         17-Jan-2017       7:00       1.3       N         17-Jan-2017       8:00       2.1       N         17-Jan-2017       9:00       1.8       NE         17-Jan-2017       10:00       1.9       NNE         17-Jan-2017       11:00       2.6       NNE         17-Jan-2017       12:00       2.5       NE         17-Jan-2017       14:00       2.6       NNE         17-Jan-2017       14:00       2.6       NNE         17-Jan-2017       15:00       3       NNE         17-Jan-2017       16:00       2.8       NNE         17-Jan-2017       18:00       1.6       ENE         17-Jan-2017       19:00       1.6       ENE         17-Jan-2017       19:00       1.6       ENE                                                                                                                                                                               | 16-Jan-2017 | 23:00 | 0.9 | NNE |
| 17-Jan-2017       2:00       1       N         17-Jan-2017       3:00       1.3       ENE         17-Jan-2017       4:00       1.1       N         17-Jan-2017       5:00       1.3       NNE         17-Jan-2017       6:00       1.3       N         17-Jan-2017       7:00       1.3       N         17-Jan-2017       8:00       2.1       N         17-Jan-2017       9:00       1.8       NE         17-Jan-2017       10:00       1.9       NNE         17-Jan-2017       11:00       2.6       NNE         17-Jan-2017       12:00       2.5       NE         17-Jan-2017       13:00       2.7       NE         17-Jan-2017       14:00       2.6       NNE         17-Jan-2017       15:00       3       NNE         17-Jan-2017       16:00       2.8       NNE         17-Jan-2017       17:00       2.2       ENE         17-Jan-2017       18:00       1.6       ENE         17-Jan-2017       19:00       1.6       ENE         17-Jan-2017       19:00       1.9       ENE                                                                                                                                                                             | 17-Jan-2017 | 0:00  | 1.1 | NE  |
| 17-Jan-2017       3:00       1.3       ENE         17-Jan-2017       4:00       1.1       N         17-Jan-2017       5:00       1.3       NNE         17-Jan-2017       6:00       1.3       N         17-Jan-2017       7:00       1.3       N         17-Jan-2017       8:00       2.1       N         17-Jan-2017       9:00       1.8       NE         17-Jan-2017       10:00       1.9       NNE         17-Jan-2017       11:00       2.6       NNE         17-Jan-2017       12:00       2.5       NE         17-Jan-2017       14:00       2.6       NNE         17-Jan-2017       14:00       2.6       NNE         17-Jan-2017       15:00       3       NNE         17-Jan-2017       16:00       2.8       NNE         17-Jan-2017       16:00       2.8       NNE         17-Jan-2017       18:00       1.6       ENE         17-Jan-2017       19:00       1.6       ENE         17-Jan-2017       19:00       1.9       ENE                                                                                                                                                                                                                           | 17-Jan-2017 | 1:00  | 1.3 | N   |
| 17-Jan-2017       4:00       1.1       N         17-Jan-2017       5:00       1.3       NNE         17-Jan-2017       6:00       1.3       N         17-Jan-2017       7:00       1.3       N         17-Jan-2017       8:00       2.1       N         17-Jan-2017       9:00       1.8       NE         17-Jan-2017       10:00       1.9       NNE         17-Jan-2017       11:00       2.6       NNE         17-Jan-2017       13:00       2.7       NE         17-Jan-2017       14:00       2.6       NNE         17-Jan-2017       15:00       3       NNE         17-Jan-2017       16:00       2.8       NNE         17-Jan-2017       16:00       2.8       NNE         17-Jan-2017       18:00       1.6       ENE         17-Jan-2017       18:00       1.6       ENE         17-Jan-2017       19:00       1.6       ENE         17-Jan-2017       19:00       1.9       ENE                                                                                                                                                                                                                                                                              | 17-Jan-2017 | 2:00  | 1   | Ν   |
| 17-Jan-2017       5:00       1.3       NNE         17-Jan-2017       6:00       1.3       N         17-Jan-2017       7:00       1.3       N         17-Jan-2017       8:00       2.1       N         17-Jan-2017       9:00       1.8       NE         17-Jan-2017       10:00       1.9       NNE         17-Jan-2017       11:00       2.6       NNE         17-Jan-2017       12:00       2.5       NE         17-Jan-2017       13:00       2.7       NE         17-Jan-2017       14:00       2.6       NNE         17-Jan-2017       15:00       3       NNE         17-Jan-2017       16:00       2.8       NNE         17-Jan-2017       17:00       2.2       ENE         17-Jan-2017       18:00       1.6       ENE         17-Jan-2017       19:00       1.6       ENE         17-Jan-2017       19:00       1.9       ENE                                                                                                                                                                                                                                                                                                                                | 17-Jan-2017 | 3:00  | 1.3 | ENE |
| 17-Jan-2017       6:00       1.3       N         17-Jan-2017       7:00       1.3       N         17-Jan-2017       8:00       2.1       N         17-Jan-2017       9:00       1.8       NE         17-Jan-2017       10:00       1.9       NNE         17-Jan-2017       11:00       2.6       NNE         17-Jan-2017       12:00       2.5       NE         17-Jan-2017       13:00       2.7       NE         17-Jan-2017       14:00       2.6       NNE         17-Jan-2017       15:00       3       NNE         17-Jan-2017       16:00       2.8       NNE         17-Jan-2017       17:00       2.2       ENE         17-Jan-2017       18:00       1.6       ENE         17-Jan-2017       19:00       1.6       ENE         17-Jan-2017       19:00       1.6       ENE         17-Jan-2017       20:00       1.9       ENE                                                                                                                                                                                                                                                                                                                               | 17-Jan-2017 | 4:00  | 1.1 | N   |
| 17-Jan-2017       7:00       1.3       N         17-Jan-2017       8:00       2.1       N         17-Jan-2017       9:00       1.8       NE         17-Jan-2017       10:00       1.9       NNE         17-Jan-2017       11:00       2.6       NNE         17-Jan-2017       12:00       2.5       NE         17-Jan-2017       13:00       2.7       NE         17-Jan-2017       14:00       2.6       NNE         17-Jan-2017       15:00       3       NNE         17-Jan-2017       16:00       2.8       NNE         17-Jan-2017       17:00       2.2       ENE         17-Jan-2017       18:00       1.6       ENE         17-Jan-2017       19:00       1.6       ENE         17-Jan-2017       19:00       1.9       ENE                                                                                                                                                                                                                                                                                                                                                                                                                                    | 17-Jan-2017 | 5:00  | 1.3 | NNE |
| 17-Jan-2017       8:00       2.1       N         17-Jan-2017       9:00       1.8       NE         17-Jan-2017       10:00       1.9       NNE         17-Jan-2017       11:00       2.6       NNE         17-Jan-2017       12:00       2.5       NE         17-Jan-2017       13:00       2.7       NE         17-Jan-2017       14:00       2.6       NNE         17-Jan-2017       15:00       3       NNE         17-Jan-2017       16:00       2.8       NNE         17-Jan-2017       17:00       2.2       ENE         17-Jan-2017       18:00       1.6       ENE         17-Jan-2017       19:00       1.6       ENE         17-Jan-2017       20:00       1.9       ENE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 17-Jan-2017 | 6:00  | 1.3 | N   |
| 17-Jan-2017       9:00       1.8       NE         17-Jan-2017       10:00       1.9       NNE         17-Jan-2017       11:00       2.6       NNE         17-Jan-2017       12:00       2.5       NE         17-Jan-2017       13:00       2.7       NE         17-Jan-2017       14:00       2.6       NNE         17-Jan-2017       15:00       3       NNE         17-Jan-2017       16:00       2.8       NNE         17-Jan-2017       17:00       2.2       ENE         17-Jan-2017       18:00       1.6       ENE         17-Jan-2017       19:00       1.6       ENE         17-Jan-2017       20:00       1.9       ENE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 17-Jan-2017 | 7:00  | 1.3 | N   |
| 17-Jan-2017       10:00       1.9       NNE         17-Jan-2017       11:00       2.6       NNE         17-Jan-2017       12:00       2.5       NE         17-Jan-2017       13:00       2.7       NE         17-Jan-2017       14:00       2.6       NNE         17-Jan-2017       15:00       3       NNE         17-Jan-2017       16:00       2.8       NNE         17-Jan-2017       17:00       2.2       ENE         17-Jan-2017       18:00       1.6       ENE         17-Jan-2017       19:00       1.6       ENE         17-Jan-2017       20:00       1.9       ENE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 17-Jan-2017 | 8:00  | 2.1 | N   |
| 17-Jan-2017       11:00       2.6       NNE         17-Jan-2017       12:00       2.5       NE         17-Jan-2017       13:00       2.7       NE         17-Jan-2017       14:00       2.6       NNE         17-Jan-2017       15:00       3       NNE         17-Jan-2017       16:00       2.8       NNE         17-Jan-2017       17:00       2.2       ENE         17-Jan-2017       18:00       1.6       ENE         17-Jan-2017       19:00       1.6       ENE         17-Jan-2017       20:00       1.9       ENE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 17-Jan-2017 | 9:00  | 1.8 | NE  |
| 17-Jan-2017       12:00       2.5       NE         17-Jan-2017       13:00       2.7       NE         17-Jan-2017       14:00       2.6       NNE         17-Jan-2017       15:00       3       NNE         17-Jan-2017       16:00       2.8       NNE         17-Jan-2017       17:00       2.2       ENE         17-Jan-2017       18:00       1.6       ENE         17-Jan-2017       19:00       1.6       ENE         17-Jan-2017       20:00       1.9       ENE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 17-Jan-2017 | 10:00 | 1.9 | NNE |
| 17-Jan-2017       13:00       2.7       NE         17-Jan-2017       14:00       2.6       NNE         17-Jan-2017       15:00       3       NNE         17-Jan-2017       16:00       2.8       NNE         17-Jan-2017       17:00       2.2       ENE         17-Jan-2017       18:00       1.6       ENE         17-Jan-2017       19:00       1.6       ENE         17-Jan-2017       20:00       1.9       ENE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 17-Jan-2017 | 11:00 | 2.6 | NNE |
| 17-Jan-2017       14:00       2.6       NNE         17-Jan-2017       15:00       3       NNE         17-Jan-2017       16:00       2.8       NNE         17-Jan-2017       17:00       2.2       ENE         17-Jan-2017       18:00       1.6       ENE         17-Jan-2017       19:00       1.6       ENE         17-Jan-2017       20:00       1.9       ENE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 17-Jan-2017 | 12:00 | 2.5 | NE  |
| 17-Jan-2017       15:00       3       NNE         17-Jan-2017       16:00       2.8       NNE         17-Jan-2017       17:00       2.2       ENE         17-Jan-2017       18:00       1.6       ENE         17-Jan-2017       19:00       1.6       ENE         17-Jan-2017       20:00       1.9       ENE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 17-Jan-2017 | 13:00 | 2.7 | NE  |
| 17-Jan-2017       16:00       2.8       NNE         17-Jan-2017       17:00       2.2       ENE         17-Jan-2017       18:00       1.6       ENE         17-Jan-2017       19:00       1.6       ENE         17-Jan-2017       20:00       1.9       ENE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 17-Jan-2017 | 14:00 | 2.6 | NNE |
| 17-Jan-2017     17:00     2.2     ENE       17-Jan-2017     18:00     1.6     ENE       17-Jan-2017     19:00     1.6     ENE       17-Jan-2017     20:00     1.9     ENE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 17-Jan-2017 | 15:00 | 3   | NNE |
| 17-Jan-2017       18:00       1.6       ENE         17-Jan-2017       19:00       1.6       ENE         17-Jan-2017       20:00       1.9       ENE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 17-Jan-2017 | 16:00 | 2.8 | NNE |
| 17-Jan-2017       18:00       1.6       ENE         17-Jan-2017       19:00       1.6       ENE         17-Jan-2017       20:00       1.9       ENE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 17-Jan-2017 | 17:00 | 2.2 | ENE |
| 17-Jan-2017 19:00 1.6 ENE<br>17-Jan-2017 20:00 1.9 ENE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |             | 18:00 | 1.6 |     |
| 17-Jan-2017 20:00 1.9 ENE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |             |       |     |     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |             |       |     |     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 17-Jan-2017 | 21:00 | 2   | ENE |

| 17-Jan-2017 | 22:00 | 1.8 | ENE |
|-------------|-------|-----|-----|
| 17-Jan-2017 | 23:00 | 1.3 | ENE |
| 18-Jan-2017 | 0:00  | 1   | E   |
| 18-Jan-2017 | 1:00  | 1.4 | NE  |
| 18-Jan-2017 | 2:00  | 0.7 | W   |
| 18-Jan-2017 | 3:00  | 0.9 | NE  |
| 18-Jan-2017 | 4:00  | 0.9 | ENE |
| 18-Jan-2017 | 5:00  | 1.1 | ENE |
| 18-Jan-2017 | 6:00  | 0.7 | NE  |
| 18-Jan-2017 | 7:00  | 0.8 | ENE |
| 18-Jan-2017 | 8:00  | 1.2 | NE  |
| 18-Jan-2017 | 9:00  | 1.6 | NE  |
| 18-Jan-2017 | 10:00 | 2.2 | NE  |
| 18-Jan-2017 | 11:00 | 2.1 | NE  |
| 18-Jan-2017 | 12:00 | 2.5 | NE  |
| 18-Jan-2017 | 13:00 | 2   | NE  |
| 18-Jan-2017 | 14:00 | 2   | NNE |
| 18-Jan-2017 | 15:00 | 2.2 | N   |
| 18-Jan-2017 | 16:00 | 2.2 | N   |
| 18-Jan-2017 | 17:00 | 2   | N   |
| 18-Jan-2017 | 18:00 | 1.9 | E   |
| 18-Jan-2017 | 19:00 | 1.5 | E   |
| 18-Jan-2017 | 20:00 | 2.3 | ENE |
| 18-Jan-2017 | 21:00 | 2.3 | ENE |
| 18-Jan-2017 | 22:00 | 1.7 | ENE |
| 18-Jan-2017 | 23:00 | 2.2 | ENE |
| 19-Jan-2017 | 0:00  | 2.4 | ESE |
| 19-Jan-2017 | 1:00  | 2   | NNW |
| 19-Jan-2017 | 2:00  | 2.7 | ENE |
| 19-Jan-2017 | 3:00  | 2.2 | N   |
| 19-Jan-2017 | 4:00  | 1.9 | W   |
| 19-Jan-2017 | 5:00  | 2.2 | W   |
| 19-Jan-2017 | 6:00  | 2.1 | W   |
| 19-Jan-2017 | 7:00  | 1.9 | WSW |
| 19-Jan-2017 | 8:00  | 2.3 | S   |
| 19-Jan-2017 | 9:00  | 2.3 | S   |
| 19-Jan-2017 | 10:00 | 2.6 | WNW |
|             |       |     |     |

| 19-Jan-2017 | 11:00 | 2.7 | N   |
|-------------|-------|-----|-----|
| 19-Jan-2017 | 12:00 | 2.9 | N   |
| 19-Jan-2017 | 13:00 | 1.9 | NW  |
| 19-Jan-2017 | 14:00 | 2.4 | NW  |
| 19-Jan-2017 | 15:00 | 2   | WNW |
| 19-Jan-2017 | 16:00 | 2.5 | WNW |
| 19-Jan-2017 | 17:00 | 2.4 | E   |
| 19-Jan-2017 | 18:00 | 2   | ESE |
| 19-Jan-2017 | 19:00 | 1.6 | NNE |
| 19-Jan-2017 | 20:00 | 1.5 | N   |
| 19-Jan-2017 | 21:00 | 0.9 | N   |
| 19-Jan-2017 | 22:00 | 1.1 | NW  |
| 19-Jan-2017 | 23:00 | 1.4 | W   |
| 20-Jan-2017 | 0:00  | 1.3 | NNE |
| 20-Jan-2017 | 1:00  | 1   | E   |
| 20-Jan-2017 | 2:00  | 1.3 | ENE |
| 20-Jan-2017 | 3:00  | 0.9 | ENE |
| 20-Jan-2017 | 4:00  | 1   | WNW |
| 20-Jan-2017 | 5:00  | 0.9 | WNW |
| 20-Jan-2017 | 6:00  | 0.9 | WNW |
| 20-Jan-2017 | 7:00  | 0.9 | WNW |
| 20-Jan-2017 | 8:00  | 1.1 | WNW |
| 20-Jan-2017 | 9:00  | 1.6 | WNW |
| 20-Jan-2017 | 10:00 | 2.2 | SW  |
| 20-Jan-2017 | 11:00 | 2.3 | WNW |
| 20-Jan-2017 | 12:00 | 2.3 | WSW |
| 20-Jan-2017 | 13:00 | 2   | SW  |
| 20-Jan-2017 | 14:00 | 2.4 | W   |
| 20-Jan-2017 | 15:00 | 2.4 | W   |
| 20-Jan-2017 | 16:00 | 2.2 | WNW |
| 20-Jan-2017 | 17:00 | 2.1 | SW  |
| 20-Jan-2017 | 18:00 | 1.9 | SW  |
| 20-Jan-2017 | 19:00 | 1.6 | WNW |
| 20-Jan-2017 | 20:00 | 0.9 | W   |
| 20-Jan-2017 | 21:00 | 1   | W   |
| 20-Jan-2017 | 22:00 | 0.9 | WNW |
| 20-Jan-2017 | 23:00 | 1.1 | W   |

| 04 1 0047   | 0.00  |     | \A/ |
|-------------|-------|-----|-----|
| 21-Jan-2017 | 0:00  | 1.1 | W   |
| 21-Jan-2017 | 1:00  | 1.1 | WNW |
| 21-Jan-2017 | 2:00  | 1   | SSW |
| 21-Jan-2017 | 3:00  | 1.2 | WNW |
| 21-Jan-2017 | 4:00  | 1.2 | WNW |
| 21-Jan-2017 | 5:00  | 1   | WNW |
| 21-Jan-2017 | 6:00  | 1.2 | NNE |
| 21-Jan-2017 | 7:00  | 1.3 | NNE |
| 21-Jan-2017 | 8:00  | 1.3 | SSW |
| 21-Jan-2017 | 9:00  | 1.8 | SW  |
| 21-Jan-2017 | 10:00 | 2   | W   |
| 21-Jan-2017 | 11:00 | 2.2 | NNE |
| 21-Jan-2017 | 12:00 | 2.3 | SE  |
| 21-Jan-2017 | 13:00 | 2.5 | ENE |
| 21-Jan-2017 | 14:00 | 2.7 | NE  |
| 21-Jan-2017 | 15:00 | 2.9 | ENE |
| 21-Jan-2017 | 16:00 | 2.7 | NE  |
| 21-Jan-2017 | 17:00 | 2.6 | N   |
| 21-Jan-2017 | 18:00 | 2.4 | NNE |
| 21-Jan-2017 | 19:00 | 2.1 | NE  |
| 21-Jan-2017 | 20:00 | 2.4 | Е   |
| 21-Jan-2017 | 21:00 | 2.3 | ENE |
| 21-Jan-2017 | 22:00 | 2.3 | ENE |
| 21-Jan-2017 | 23:00 | 2.3 | NE  |
| 22-Jan-2017 | 0:00  | 2.6 | N   |
| 22-Jan-2017 | 1:00  | 2.3 | ENE |
| 22-Jan-2017 | 2:00  | 2.2 | ENE |
| 22-Jan-2017 | 3:00  | 1.8 | ENE |
| 22-Jan-2017 | 4:00  | 2.4 | N   |
| 22-Jan-2017 | 5:00  | 2.4 | SSE |
| 22-Jan-2017 | 6:00  | 1.8 | Е   |
| 22-Jan-2017 | 7:00  | 1.9 | ENE |
| 22-Jan-2017 | 8:00  | 2.4 | ESE |
| 22-Jan-2017 | 9:00  | 2.4 | ENE |
| 22-Jan-2017 | 10:00 | 2.4 | ENE |
| 22-Jan-2017 | 11:00 | 2.6 | ENE |
| 22-Jan-2017 | 12:00 | 2.5 | ESE |

| 22-Jan-2017 | 13:00 | 2.5 | ESE |
|-------------|-------|-----|-----|
| 22-Jan-2017 | 14:00 | 2.7 | ENE |
| 22-Jan-2017 | 15:00 | 2.4 | ENE |
| 22-Jan-2017 | 16:00 | 2.8 | ENE |
| 22-Jan-2017 | 17:00 | 2.2 | ENE |
| 22-Jan-2017 | 18:00 | 2   | NE  |
| 22-Jan-2017 | 19:00 | 2.6 | ENE |
| 22-Jan-2017 | 20:00 | 2.8 | NE  |
| 22-Jan-2017 | 21:00 | 3   | NE  |
| 22-Jan-2017 | 22:00 | 2.7 | NE  |
| 22-Jan-2017 | 23:00 | 2.4 | NNE |
| 23-Jan-2017 | 0:00  | 2.3 | NNE |
| 23-Jan-2017 | 1:00  | 2.3 | NE  |
| 23-Jan-2017 | 2:00  | 2.4 | NNE |
| 23-Jan-2017 | 3:00  | 1.9 | ENE |
| 23-Jan-2017 | 4:00  | 2.2 | E   |
| 23-Jan-2017 | 5:00  | 2.5 | ENE |
| 23-Jan-2017 | 6:00  | 2   | ENE |
| 23-Jan-2017 | 7:00  | 1.9 | NE  |
| 23-Jan-2017 | 8:00  | 2.3 | SSE |
| 23-Jan-2017 | 9:00  | 2.5 | NNE |
| 23-Jan-2017 | 10:00 | 3.2 | NNE |
| 23-Jan-2017 | 11:00 | 3.2 | N   |
| 23-Jan-2017 | 12:00 | 3.1 | NE  |
| 23-Jan-2017 | 13:00 | 3.4 | ENE |
| 23-Jan-2017 | 14:00 | 2.9 | ENE |
| 23-Jan-2017 | 15:00 | 2.8 | ENE |
| 23-Jan-2017 | 16:00 | 2.6 | ENE |
| 23-Jan-2017 | 17:00 | 2.8 | ESE |
| 23-Jan-2017 | 18:00 | 2.5 | ESE |
| 23-Jan-2017 | 19:00 | 2.1 | ESE |
| 23-Jan-2017 | 20:00 | 2.4 | ESE |
| 23-Jan-2017 | 21:00 | 2.2 | NNE |
| 23-Jan-2017 | 22:00 | 1.7 | NNE |
| 23-Jan-2017 | 23:00 | 1.4 | NE  |
| 24-Jan-2017 | 0:00  | 1.5 | SE  |
| 24-Jan-2017 | 1:00  | 1.5 | Е   |
| L           | i .   | 1   | i   |

|                                       | -     |     |     |
|---------------------------------------|-------|-----|-----|
| 24-Jan-2017                           | 2:00  | 1.2 | NNE |
| 24-Jan-2017                           | 3:00  | 1.1 | NNE |
| 24-Jan-2017                           | 4:00  | 1.3 | NE  |
| 24-Jan-2017                           | 5:00  | 1.4 | NE  |
| 24-Jan-2017                           | 6:00  | 1.3 | NE  |
| 24-Jan-2017                           | 7:00  | 1.4 | NE  |
| 24-Jan-2017                           | 8:00  | 1.8 | NE  |
| 24-Jan-2017                           | 9:00  | 2.1 | ESE |
| 24-Jan-2017                           | 10:00 | 2.5 | ESE |
| 24-Jan-2017                           | 11:00 | 2.6 | ESE |
| 24-Jan-2017                           | 12:00 | 2.4 | WSW |
| 24-Jan-2017                           | 13:00 | 2.5 | NE  |
| 24-Jan-2017                           | 14:00 | 2.9 | S   |
| 24-Jan-2017                           | 15:00 | 2.6 | SE  |
| 24-Jan-2017                           | 16:00 | 2.4 | ESE |
| 24-Jan-2017                           | 17:00 | 1.9 | NE  |
| 24-Jan-2017                           | 18:00 | 1.8 | ENE |
| 24-Jan-2017                           | 19:00 | 1.5 | ESE |
| 24-Jan-2017                           | 20:00 | 1.3 | ENE |
| 24-Jan-2017                           | 21:00 | 1.2 | SSE |
| 24-Jan-2017                           | 22:00 | 1.2 | SW  |
| 24-Jan-2017                           | 23:00 | 1.3 | W   |
| 25-Jan-2017                           | 0:00  | 1.3 | N   |
| 25-Jan-2017                           | 1:00  | 1.2 | N   |
| 25-Jan-2017                           | 2:00  | 1.2 | SE  |
| 25-Jan-2017                           | 3:00  | 1.1 | SE  |
| 25-Jan-2017                           | 4:00  | 1   | SSE |
| 25-Jan-2017                           | 5:00  | 1.1 | SSE |
| 25-Jan-2017                           | 6:00  | 0.9 | ESE |
| 25-Jan-2017                           | 7:00  | 1.2 | SSE |
| 25-Jan-2017                           | 8:00  | 2   | ENE |
| 25-Jan-2017                           | 9:00  | 2.6 | NE  |
| 25-Jan-2017                           | 10:00 | 2.7 | ENE |
| 25-Jan-2017                           | 11:00 | 2.5 | NE  |
| 25-Jan-2017                           | 12:00 | 1.9 | N   |
| 25-Jan-2017                           | 13:00 | 2.4 | SE  |
| 25-Jan-2017                           | 14:00 | 2.3 | SE  |
| · · · · · · · · · · · · · · · · · · · |       |     |     |

| 25-Jan-2017 15:00 2.8 S  | · –       |
|--------------------------|-----------|
|                          | ) <u></u> |
| 25-Jan-2017 16:00 2.4 ES | SE        |
| 25-Jan-2017 17:00 1.9 S  | SE        |
| 25-Jan-2017 18:00 1.6 S  | SE        |
| 25-Jan-2017 19:00 1.2 ES | SE        |
| 25-Jan-2017 20:00 0.9 S  | SE        |
| 25-Jan-2017 21:00 0.7 SS | SE        |
| 25-Jan-2017 22:00 0.6 S  | SE        |
| 25-Jan-2017 23:00 0.7 S  | SE        |
| 26-Jan-2017 0:00 0.8 S   | SE SE     |
| 26-Jan-2017 1:00 0.6 N   | ΙE        |
| 26-Jan-2017 2:00 0.6 N   | ΙE        |
| 26-Jan-2017 3:00 0.6 E   | E         |
| 26-Jan-2017 4:00 0.5 ES  | SE        |
| 26-Jan-2017 5:00 0.5 Et  | NE        |
| 26-Jan-2017 6:00 0.4 N   | IE        |
| 26-Jan-2017 7:00 0.6 N   | IE        |
| 26-Jan-2017 8:00 1.9 ES  | SE        |
| 26-Jan-2017 9:00 2.2 S   | SE        |
| 26-Jan-2017 10:00 2.1 N  | IE        |
| 26-Jan-2017 11:00 1.6 S  | SE .      |
| 26-Jan-2017 12:00 2.2 SS | SW        |
| 26-Jan-2017 13:00 2.5 ES | SE        |
| 26-Jan-2017 14:00 2.2 SS | SW        |
| 26-Jan-2017 15:00 2.2 S  | SE .      |
| 26-Jan-2017 16:00 2.1 S  | SE .      |
| 26-Jan-2017 17:00 1.7 S  | SE        |
| 26-Jan-2017 18:00 1.2 N  | IE        |
| 26-Jan-2017 19:00 1 N    | IE        |
| 26-Jan-2017 20:00 1.2 ES | SE        |
| 26-Jan-2017 21:00 1.8 ES | SE        |
| 26-Jan-2017 22:00 1.8 ES | SE        |
| 26-Jan-2017 23:00 1.8 N  | IE        |
| 27-Jan-2017 0:00 1.4 EN  | NE        |
| 27-Jan-2017 1:00 1.6 SS  | SW SW     |
| 27-Jan-2017 2:00 1.4 SS  | SE        |
| 27-Jan-2017 3:00 1.2 EN  | NE        |

| 27-Jan-2017 | 4:00  | 1.1      | SSE |
|-------------|-------|----------|-----|
| 27-Jan-2017 | 5:00  | 1        | ESE |
| 27-Jan-2017 | 6:00  | 0.9      | NE  |
| 27-Jan-2017 | 7:00  | 0.9      | NNE |
| 27-Jan-2017 | 8:00  | 1.3      | WSW |
| 27-Jan-2017 | 9:00  | 1.6      | WNW |
| 27-Jan-2017 | 10:00 | 1.4      | WSW |
| 27-Jan-2017 | 11:00 | 1.5      | ENE |
| 27-Jan-2017 | 12:00 | 2.4      | NE  |
| 27-Jan-2017 | 13:00 | 2.4      | SW  |
| 27-Jan-2017 | 14:00 | 2.5      | SE  |
| 27-Jan-2017 | 15:00 | 2.3      | SE  |
| 27-Jan-2017 | 16:00 | 2.1      | SE  |
| 27-Jan-2017 | 17:00 | 2.1      | SE  |
| 27-Jan-2017 | 18:00 | 1.6      | SE  |
| 27-Jan-2017 | 19:00 | 1.2      | WNW |
| 27-Jan-2017 | 20:00 | 1        | ENE |
| 27-Jan-2017 | 21:00 | 1.6      | ENE |
| 27-Jan-2017 | 22:00 | 0.8      | N   |
| 27-Jan-2017 | 23:00 | 1        | N   |
| 28-Jan-2017 | 0:00  | 0.9      | NNE |
| 28-Jan-2017 | 1:00  | 0.8      | ESE |
| 28-Jan-2017 | 2:00  | 0.8      | ENE |
| 28-Jan-2017 | 3:00  | 1.7      | NE  |
| 28-Jan-2017 | 4:00  | 1.6      | ENE |
| 28-Jan-2017 | 5:00  | 1.4      | ENE |
| 28-Jan-2017 | 6:00  | 1.4      | ENE |
| 28-Jan-2017 | 7:00  | 1.6      | NE  |
| 28-Jan-2017 | 8:00  | 1.8      | N   |
| 28-Jan-2017 | 9:00  | 2.3      | ENE |
| 28-Jan-2017 | 10:00 | 3.1      | NE  |
| 28-Jan-2017 | 11:00 | 3.1      | W   |
| 28-Jan-2017 | 12:00 | 2.7      | N   |
| 28-Jan-2017 | 13:00 | 2.8      | NE  |
| 28-Jan-2017 | 14:00 | 2.8      | ENE |
| 28-Jan-2017 | 15:00 | 3.3      | ENE |
| 28-Jan-2017 | 16:00 | 2.7      | SE  |
| L           | 1     | <u>i</u> | i   |

| 28-Jan-2017 | 17:00 | 3.2 | NE  |
|-------------|-------|-----|-----|
| 28-Jan-2017 | 18:00 | 2.5 | NE  |
| 28-Jan-2017 | 19:00 | 2.4 | NE  |
| 28-Jan-2017 | 20:00 | 2.2 | NNE |
| 28-Jan-2017 | 21:00 | 1.9 | NE  |
| 28-Jan-2017 | 22:00 | 2   | NE  |
| 28-Jan-2017 | 23:00 | 2   | NNE |
| 29-Jan-2017 | 0:00  | 2.1 | ESE |
| 29-Jan-2017 | 1:00  | 1.4 | NE  |
| 29-Jan-2017 | 2:00  | 1.6 | NE  |
| 29-Jan-2017 | 3:00  | 1.9 | NE  |
| 29-Jan-2017 | 4:00  | 1.8 | NE  |
| 29-Jan-2017 | 5:00  | 1.8 | NNE |
| 29-Jan-2017 | 6:00  | 1.8 | NNE |
| 29-Jan-2017 | 7:00  | 1.7 | NNE |
| 29-Jan-2017 | 8:00  | 1.9 | NNE |
| 29-Jan-2017 | 9:00  | 2.6 | NNE |
| 29-Jan-2017 | 10:00 | 2.9 | NNE |
| 29-Jan-2017 | 11:00 | 2.7 | N   |
| 29-Jan-2017 | 12:00 | 3   | NNE |
| 29-Jan-2017 | 13:00 | 2.7 | NW  |
| 29-Jan-2017 | 14:00 | 2.6 | WNW |
| 29-Jan-2017 | 15:00 | 2.9 | SSW |
| 29-Jan-2017 | 16:00 | 2.4 | W   |
| 29-Jan-2017 | 17:00 | 2.2 | WNW |
| 29-Jan-2017 | 18:00 | 1.7 | W   |
| 29-Jan-2017 | 19:00 | 1.3 | W   |
| 29-Jan-2017 | 20:00 | 1.3 | WNW |
| 29-Jan-2017 | 21:00 | 1.1 | S   |
| 29-Jan-2017 | 22:00 | 1.1 | NNE |
| 29-Jan-2017 | 23:00 | 0.9 | SSW |
| 30-Jan-2017 | 0:00  | 1   | SSW |
| 30-Jan-2017 | 1:00  | 1.1 | SW  |
| 30-Jan-2017 | 2:00  | 0.9 | ENE |
| 30-Jan-2017 | 3:00  | 1   | ENE |
| 30-Jan-2017 | 4:00  | 1.2 | NE  |
| 30-Jan-2017 | 5:00  | 1.1 | N   |

| 30-Jan-2017 | 6:00  | 1.1 | N   |  |
|-------------|-------|-----|-----|--|
| 30-Jan-2017 | 7:00  | 1.2 | N   |  |
| 30-Jan-2017 | 8:00  | 1.3 | N   |  |
| 30-Jan-2017 | 9:00  | 1.9 | N   |  |
| 30-Jan-2017 | 10:00 | 1.8 | NNE |  |
| 30-Jan-2017 | 11:00 | 2.3 | NE  |  |
| 30-Jan-2017 | 12:00 | 2.6 | N   |  |
| 30-Jan-2017 | 13:00 | 2.1 | NE  |  |
| 30-Jan-2017 | 14:00 | 2.4 | ENE |  |
| 30-Jan-2017 | 15:00 | 2.4 | ENE |  |
| 30-Jan-2017 | 16:00 | 2   | ENE |  |
| 30-Jan-2017 | 17:00 | 1.6 | ENE |  |
| 30-Jan-2017 | 18:00 | 1.3 | SE  |  |
| 30-Jan-2017 | 19:00 | 1.4 | SSE |  |
| 30-Jan-2017 | 20:00 | 1.2 | N   |  |
| 30-Jan-2017 | 21:00 | 1.2 | SSE |  |
| 30-Jan-2017 | 22:00 | 1   | ENE |  |
| 30-Jan-2017 | 23:00 | 1.4 | NE  |  |
| 31-Jan-2017 | 0:00  | 1.1 | ENE |  |
| 31-Jan-2017 | 1:00  | 1.2 | NNE |  |
| 31-Jan-2017 | 2:00  | 1.2 | ESE |  |
| 31-Jan-2017 | 3:00  | 1.3 | NE  |  |
| 31-Jan-2017 | 4:00  | 1.2 | NE  |  |
| 31-Jan-2017 | 5:00  | 1.3 | NE  |  |
| 31-Jan-2017 | 6:00  | 1.1 | NNE |  |
| 31-Jan-2017 | 7:00  | 1.1 | N   |  |
| 31-Jan-2017 | 8:00  | 1.6 | N   |  |
| 31-Jan-2017 | 9:00  | 1.8 | N   |  |
| 31-Jan-2017 | 10:00 | 1.9 | NNE |  |
| 31-Jan-2017 | 11:00 | 1.9 | N   |  |
| 31-Jan-2017 | 12:00 | 1.7 | N   |  |
| 31-Jan-2017 | 13:00 | 1.6 | NW  |  |
| 31-Jan-2017 | 14:00 | 1.6 | W   |  |
| 31-Jan-2017 | 15:00 | 1.9 | WNW |  |
| 31-Jan-2017 | 16:00 | 1.8 | N   |  |
| 31-Jan-2017 | 17:00 | 1.8 | W   |  |
| 31-Jan-2017 | 18:00 | 1.2 | W   |  |

| 31-Jan-2017 | 19:00 | 1.4 | SW  |
|-------------|-------|-----|-----|
| 31-Jan-2017 | 20:00 | 1.7 | SW  |
| 31-Jan-2017 | 21:00 | 1.2 | WNW |
| 31-Jan-2017 | 22:00 | 0.9 | W   |
| 31-Jan-2017 | 23:00 | 1   | ENE |

### APPENDIX D ENVIRONMENTAL MONITORING SCHEDULES

#### Contract No. KL/2012/02 Kai Tak Development - Stage 3A Infrastructure at Former North Apron Area Impact Air and Noise Monitoring Schedule for January 2017

| Sunday | Monday             | Tuesday      | Wednesday     | Thursday     | Friday        | Saturday |
|--------|--------------------|--------------|---------------|--------------|---------------|----------|
| 1-Jan  | 2-Jan              | 3-Jan        | 4-Jan         | 5-Jan        | 6-Jan         | 7-Jan    |
|        |                    |              |               |              |               |          |
|        |                    | Noise        | 1 hr TSP X3   |              |               |          |
|        |                    | (M9)         | AM1(B) & AM2  |              |               |          |
|        |                    | (112)        | Noise         |              |               |          |
|        |                    | 24 hr TSP    | (M3 & M4)     |              |               |          |
| 0.1    | 0.1                | 10.1         | 11.7          | 10.1         | 12.1          | 14.7     |
| 8-Jan  | 9-Jan              | 10-Jan       | 11-Jan        | 12-Jan       | 13-Jan        | 14-Jan   |
|        |                    | 1 hr TSP X3  |               |              |               |          |
|        |                    | AM1(B) & AM2 |               |              |               |          |
|        |                    | Noise        |               | Noise        |               |          |
|        |                    | (M3 & M4)    |               | (M9)         |               |          |
|        | 24 hr TSP          |              |               |              | 24 hr TSP     |          |
| 15-Jan | 16-Jan             | 17-Jan       | 18-Jan        | 19-Jan       | 20-Jan        | 21-Jan   |
|        | 1 hr TSP X3        |              |               |              | 1 hr TSP X3   |          |
|        | AM1(B) & AM2       |              |               |              | AM1(B) & AM2  |          |
|        |                    |              |               |              | AWI(B) & AWI2 |          |
|        | Noise<br>(M3 & M4) |              | Noise<br>(M9) |              |               |          |
|        | (M3 & M4)          |              | (1019)        | 24 hr TSP    |               |          |
| 22-Jan | 23-Jan             | 24-Jan       | 25-Jan        | 26-Jan       | 27-Jan        | 28-Jan   |
|        |                    |              |               | 1 hr TSP X3  |               |          |
|        |                    |              |               |              |               |          |
|        | Noise              |              |               | AM1(B) & AM2 |               |          |
|        | (M9)               |              |               | Noise        |               |          |
|        |                    |              | 241 755       | (M3 & M4)    | 241 755       |          |
| 29-Jan | 30-Jan             | 31-Jan       | 24 hr TSP     |              | 24 hr TSP     |          |
| 29-Jan | 30-Jan             | 31-Jan       |               |              |               |          |
|        |                    |              |               |              |               |          |
|        |                    |              |               |              |               |          |
|        |                    |              |               |              |               |          |
|        |                    |              |               |              |               |          |
|        |                    |              |               |              |               |          |

#### Air Quality Monitoring Station

AM1(B) -Boundary of KTD/Outside Contractor's site office of Contract KL/2012/02 AM2 - Lee Kau Yan Memorial School

Noise Monitoring Station

M3 - Cognitio College

M4 - Lee Kau Yan Memorial School

M9 - Tak Long Estate

#### Contract No. KL/2012/02 Kai Tak Development - Stage 3A Infrastructure at Former North Apron Area Tentative Impact Air and Noise Monitoring Schedule for February 2017

| Sunday                                  | Monday             | Tuesday      | Wednesday                   | Thursday      | Friday    | Saturday |
|-----------------------------------------|--------------------|--------------|-----------------------------|---------------|-----------|----------|
|                                         |                    |              | 1-Feb                       | 2-Feb         | 3-Feb     | 4-Feb    |
|                                         |                    |              | 1 hr TSP X3<br>AM1(B) & AM2 |               |           |          |
|                                         |                    |              | Noise<br>(M3 & M4)          | Noise<br>(M9) |           |          |
|                                         |                    |              |                             | 24 hr TSP     |           |          |
| 5-Feb                                   | 6-Feb              | 7-Feb        | 8-Feb                       | 9-Feb         | 10-Feb    | 11-Feb   |
|                                         | 1 hr TSP X3        |              |                             | 1 hr TSP X3   |           |          |
|                                         | AM1(B) & AM2       |              | Noise                       | AM1(B) & AM2  |           |          |
|                                         | Noise<br>(M3 & M4) |              | (M9)                        |               |           |          |
|                                         |                    |              | 24 hr TSP                   |               |           |          |
| 12-Feb                                  | 13-Feb             | 14-Feb       | 15-Feb                      | 16-Feb        | 17-Feb    | 18-Feb   |
|                                         |                    |              | 1 hr TSP X3                 |               |           |          |
|                                         |                    | Noise        | AM1(B) & AM2                |               |           |          |
|                                         |                    | (M9)         | Noise<br>(M3 & M4)          |               |           |          |
|                                         |                    | 24 hr TSP    |                             |               |           |          |
| 19-Feb                                  | 20-Feb             | 21-Feb       | 22-Feb                      | 23-Feb        | 24-Feb    | 25-Feb   |
|                                         |                    | 1 hr TSP X3  |                             |               |           |          |
|                                         | Noise              | AM1(B) & AM2 |                             |               |           | 1        |
|                                         | (M9)               | Noise        |                             |               |           |          |
|                                         | (112)              | (M3 & M4)    |                             |               |           |          |
|                                         | 24 hr TSP          |              |                             |               | 24 hr TSP |          |
| 26-Feb                                  | 27-Feb             | 28-Feb       |                             |               |           |          |
|                                         | 1 hr TSP X3        |              |                             |               |           |          |
|                                         | AM1(B) & AM2       |              |                             |               |           |          |
|                                         | Noise              |              |                             |               |           |          |
|                                         | (M3 & M4)          |              |                             |               |           |          |
| TTI 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 | L                  | 4            |                             | L             |           |          |

The schedule may be changed due to unforeseen circumstances (adverse weather, etc)

#### Air Quality Monitoring Station

AM1(B) -Boundary of KTD/Outside Contractor's site office of Contract KL/2012/02 AM2 - Lee Kau Yan Memorial School

#### Noise Monitoring Station

M3 - Cognitio College

M4 - Lee Kau Yan Memorial School

M9 - Tak Long Estate

### APPENDIX E 1-HOUR TSP MONITORING RESULTS AND GRAPHICAL PRESENTATION


## **Appendix E - 1-hour TSP Monitoring Results**


| Location AM1(B) - Outside RLJV Site Office |       |         |                                    |  |  |
|--------------------------------------------|-------|---------|------------------------------------|--|--|
| Date                                       | Time  | Weather | Particulate Concentration ( μg/m3) |  |  |
| 4-Jan-17                                   | 9:00  | Sunny   | 220.7                              |  |  |
| 4-Jan-17                                   | 10:00 | Sunny   | 222.2                              |  |  |
| 4-Jan-17                                   | 11:00 | Sunny   | 198.3                              |  |  |
| 10-Jan-17                                  | 9:00  | Cloudy  | 208.0                              |  |  |
| 10-Jan-17                                  | 10:00 | Cloudy  | 212.2                              |  |  |
| 10-Jan-17                                  | 11:00 | Cloudy  | 217.0                              |  |  |
| 16-Jan-17                                  | 13:15 | Fine    | 224.3                              |  |  |
| 16-Jan-17                                  | 14:15 | Fine    | 219.3                              |  |  |
| 16-Jan-17                                  | 15:15 | Fine    | 215.8                              |  |  |
| 20-Jan-17                                  | 13:00 | Sunny   | 177.2                              |  |  |
| 20-Jan-17                                  | 14:00 | Sunny   | 179.8                              |  |  |
| 20-Jan-17                                  | 15:00 | Sunny   | 181.1                              |  |  |
| 26-Jan-17                                  | 9:00  | Sunny   | 192.4                              |  |  |
| 26-Jan-17                                  | 10:00 | Sunny   | 197.1                              |  |  |
| 26-Jan-17                                  | 11:00 | Sunny   | 201.7                              |  |  |
|                                            |       | Average | 204.5                              |  |  |
|                                            |       | Maximum | 224.3                              |  |  |
|                                            |       | Minimum | 177.2                              |  |  |

| Location AM2 - Lee Kau Yan Memorial School |       |         |                                    |  |  |  |
|--------------------------------------------|-------|---------|------------------------------------|--|--|--|
| Date                                       | Time  | Weather | Particulate Concentration ( μg/m3) |  |  |  |
| 4-Jan-17                                   | 13:00 | Sunny   | 93.3                               |  |  |  |
| 4-Jan-17                                   | 14:00 | Sunny   | 89.7                               |  |  |  |
| 4-Jan-17                                   | 15:00 | Sunny   | 92.4                               |  |  |  |
| 10-Jan-17                                  | 13:00 | Cloudy  | 193.3                              |  |  |  |
| 10-Jan-17                                  | 14:00 | Cloudy  | 184.4                              |  |  |  |
| 10-Jan-17                                  | 15:00 | Cloudy  | 211.7                              |  |  |  |
| 16-Jan-17                                  | 8:45  | Fine    | 182.5                              |  |  |  |
| 16-Jan-17                                  | 9:45  | Fine    | 183.4                              |  |  |  |
| 16-Jan-17                                  | 10:45 | Fine    | 186.0                              |  |  |  |
| 20-Jan-17                                  | 9:00  | Sunny   | 173.0                              |  |  |  |
| 20-Jan-17                                  | 10:00 | Sunny   | 178.0                              |  |  |  |
| 20-Jan-17                                  | 11:00 | Sunny   | 184.4                              |  |  |  |
| 26-Jan-17                                  | 9:00  | Sunny   | 222.4                              |  |  |  |
| 26-Jan-17                                  | 10:00 | Sunny   | 230.2                              |  |  |  |
| 26-Jan-17                                  | 11:00 | Sunny   | 232.2                              |  |  |  |
|                                            |       | Average | 175.8                              |  |  |  |
|                                            |       | Maximum | 232.2                              |  |  |  |
|                                            |       | Minimum | 89.7                               |  |  |  |

MA13043/App E - 1hr TSP Cinotech

#### 1-hr TSP Concentration Levels

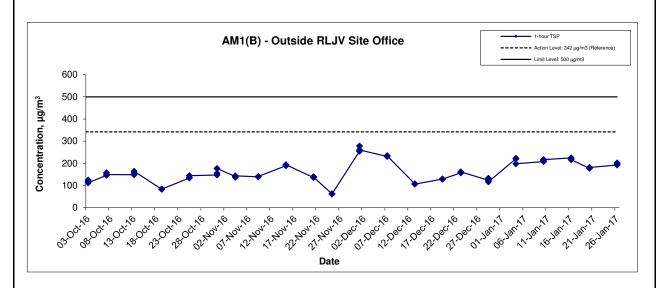

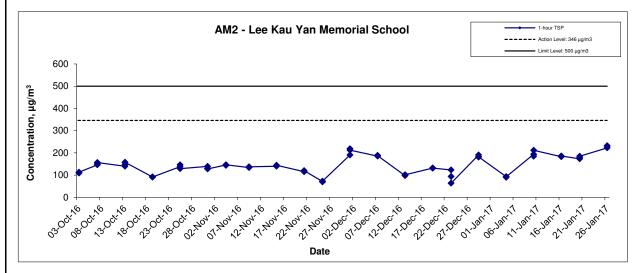

| Title | Contract No. KL/2012/02                                             |  |  |  |  |
|-------|---------------------------------------------------------------------|--|--|--|--|
|       | Kai Tak Development - Stage 3A Infrastructure at Former North Apron |  |  |  |  |
|       | Area                                                                |  |  |  |  |
|       | Graphical Presentation of 1-hour TSP Monitoring Results             |  |  |  |  |

| Scale | N.T.S  | Project<br>No. | MA13043 |
|-------|--------|----------------|---------|
|       |        |                |         |
| Date  |        | Appendi        | Х       |
|       | Jan 17 |                | Е       |



APPENDIX F 24-HOUR TSP MONITORING RESULTS AND GRAPHICAL PRESENTATION

#### Appendix F - 24-hour TSP Monitoring Results

#### Location AM1(B) - Outside RLJV site office (KL/2012/02)


| Start Date | Weather   | Air       | Atmospheric         | Filter W | eight (g) | Particulate | Elaps   | e Time | Sampling   | Flow Rate | e (m³/min.) | Av. flow              | Total vol.        | Conc.                |
|------------|-----------|-----------|---------------------|----------|-----------|-------------|---------|--------|------------|-----------|-------------|-----------------------|-------------------|----------------------|
| Start Date | Condition | Temp. (K) | Pressure, Pa (mmHg) | Initial  | Final     | weight (g)  | Initial | Final  | Time(hrs.) | Initial   | Final       | (m <sup>3</sup> /min) | (m <sup>3</sup> ) | (μg/m <sup>3</sup> ) |
| 3-Jan-17   | Cloudy    | 292.5     | 768.4               | 3.6040   | 3.7410    | 0.1370      | 960.6   | 984.6  | 24.0       | 1.23      | 1.23        | 1.23                  | 1767.9            | 77.5                 |
| 9-Jan-17   | Cloudy    | 292.8     | 766.4               | 3.5990   | 3.7527    | 0.1537      | 984.6   | 1008.6 | 24.0       | 1.23      | 1.23        | 1.23                  | 1764.9            | 87.1                 |
| 13-Jan-17  | Cloudy    | 285.7     | 765.8               | 3.5925   | 3.7188    | 0.1263      | 1031.6  | 1055.6 | 24.0       | 1.24      | 1.24        | 1.24                  | 1784.9            | 70.8                 |
| 19-Jan-17  | Cloudy    | 292.8     | 769.4               | 3.5707   | 3.6795    | 0.1088      | 1055.6  | 1079.6 | 24.0       | 1.23      | 1.23        | 1.23                  | 1768.3            | 61.5                 |
| 25-Jan-17  | Sunny     | 291.7     | 772.2               | 3.5932   | 3.7480    | 0.1548      | 1079.6  | 1103.6 | 24.0       | 1.22      | 1.22        | 1.22                  | 1750.7            | 88.4                 |
| 27-Jan-17  | Sunny     | 291.3     | 771.6               | 3.6355   | 3.7545    | 0.1190      | 1103.6  | 1127.6 | 24.0       | 1.22      | 1.22        | 1.22                  | 1751.2            | 68.0                 |
|            |           |           |                     |          |           |             |         |        |            |           |             |                       | Min               | 61.5                 |
|            |           |           |                     |          |           |             |         |        |            |           |             |                       | Max               | 88.4                 |
|            |           |           |                     |          |           |             |         |        |            |           |             |                       | Average           | 75.5                 |


#### Location AM2 - Lee Kau Yan Memorial School

| Start Date | Weather   | Air       | Atmospheric         | Filter W | eight (g) | Particulate | Elaps   | e Time  | Sampling   | Flow Rate | e (m³/min.) | Av. flow              | Total vol.        | Conc.         |
|------------|-----------|-----------|---------------------|----------|-----------|-------------|---------|---------|------------|-----------|-------------|-----------------------|-------------------|---------------|
| Start Date | Condition | Temp. (K) | Pressure, Pa (mmHg) | Initial  | Final     | weight (g)  | Initial | Final   | Time(hrs.) | Initial   | Final       | (m <sup>3</sup> /min) | (m <sup>3</sup> ) | $(\mu g/m^3)$ |
| 3-Jan-17   | Sunny     | 293.4     | 768.0               | 3.5699   | 3.6958    | 0.1259      | 17597.5 | 17621.5 | 24.0       | 1.23      | 1.23        | 1.23                  | 1770.6            | 71.1          |
| 9-Jan-17   | Cloudy    | 293.1     | 766.3               | 3.6084   | 3.8376    | 0.2292      | 17621.5 | 17645.5 | 24.0       | 1.23      | 1.23        | 1.23                  | 1769.6            | 129.5         |
| 13-Jan-17  | Cloudy    | 283.4     | 764.7               | 3.5933   | 3.6420    | 0.0487      | 17645.5 | 17669.5 | 24.0       | 1.25      | 1.25        | 1.25                  | 1797.5            | 27.1          |
| 19-Jan-17  | Cloudy    | 293.5     | 768.8               | 3.6150   | 3.7787    | 0.1637      | 17669.5 | 17693.5 | 24.0       | 1.23      | 1.23        | 1.23                  | 1771.2            | 92.4          |
| 25-Jan-17  | Sunny     | 292.3     | 772.7               | 3.5654   | 3.7283    | 0.1629      | 17693.5 | 17717.5 | 24.0       | 1.21      | 1.21        | 1.21                  | 1741.2            | 93.6          |
| 27-Jan-17  | Sunny     | 292.4     | 771.5               | 3.6003   | 3.7198    | 0.1195      | 17717.5 | 17741.5 | 24.0       | 1.21      | 1.21        | 1.21                  | 1739.6            | 68.7          |
|            |           |           |                     |          |           |             |         |         |            |           |             |                       | Min               | 27.1          |
|            |           |           |                     |          |           |             |         |         |            |           |             |                       | Max               | 129.5         |
|            |           |           |                     |          |           |             |         |         |            |           |             |                       | Average           | 80.4          |

MA13043/App F - 24hr TSP

#### 24-hr TSP Concentration Levels

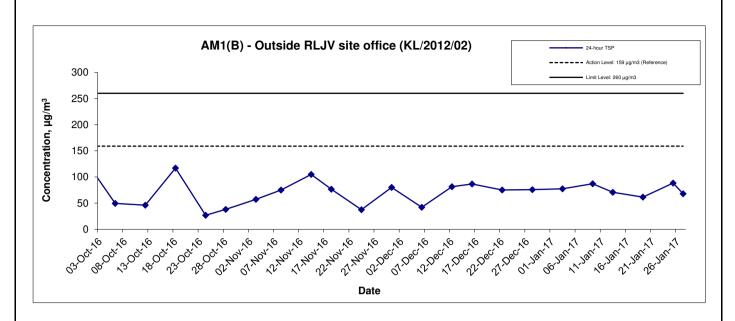

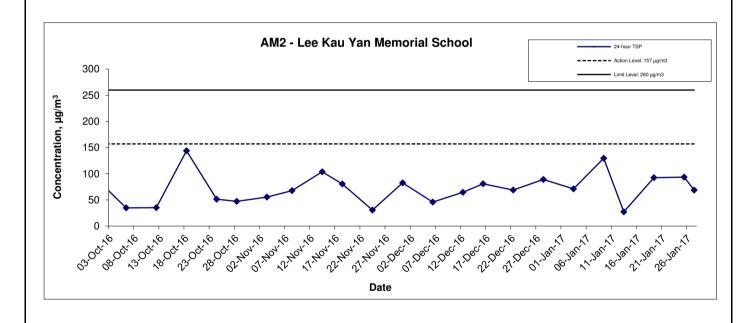

| Title | Contract No. KL/2012/02  Kai Tak Development - Stage 3A Infrastructure at Former North Apron  Area |
|-------|----------------------------------------------------------------------------------------------------|
|       | Graphical Presentation of 24-hour TSP Monitoring Results                                           |

| Scale |        | Project |         |
|-------|--------|---------|---------|
|       | N.T.S  | No.     | MA13043 |
| Date  |        | Append  | ix      |
|       | Jan 17 |         | F       |



APPENDIX G NOISE MONITORING RESULTS AND GRAPHICAL PRESENTATION


#### Appendix G - Noise Monitoring Results

| Location M3 - | Cognitio C | ollege  |                 |                       |       |                  |                            |  |  |  |  |
|---------------|------------|---------|-----------------|-----------------------|-------|------------------|----------------------------|--|--|--|--|
|               |            |         |                 | Unit: dB (A) (30-min) |       |                  |                            |  |  |  |  |
| Date          | Time       | Weather | Meas            | sured Noise I         | Level | Background Noise | Construction Noise Level   |  |  |  |  |
|               |            |         | L <sub>eq</sub> | L <sub>10</sub>       | L 90  | L <sub>eq</sub>  | L <sub>eq</sub>            |  |  |  |  |
| 4-Jan-17      | 15:15      | Sunny   | 79.7            | 81.3                  | 77.7  | 79.6             | 63.3                       |  |  |  |  |
| 10-Jan-17     | 15:25      | Cloudy  | 78.2            | 80.5                  | 75.2  | 78.3             | 78.2 Measured ≤ Background |  |  |  |  |
| 16-Jan-17     | 13:00      | Cloudy  | 64.3            | 66.0                  | 59.8  | 64.0             | 52.5                       |  |  |  |  |
| 26-Jan-17     | 11:30      | Sunny   | 78.3            | 79.8                  | 76.3  | 79.0             | 78.3 Measured ≤ Background |  |  |  |  |

| Location M4 - | Lee Kau Ya | an Memorial S | School          |                 |       |                    |                          |
|---------------|------------|---------------|-----------------|-----------------|-------|--------------------|--------------------------|
|               |            |               |                 |                 | Uni   | t: dB (A) (30-min) |                          |
| Date          | Time       | Weather       | Meas            | sured Noise     | Level | Baseline Level     | Construction Noise Level |
|               |            |               | L <sub>eq</sub> | L <sub>10</sub> | L 90  | L <sub>eq</sub>    | L <sub>eq</sub>          |
| 4-Jan-17      | 13:00      | Sunny         | 76.4            | 77.9            | 74.5  |                    | 76.4 Measured ≤ Baseline |
| 10-Jan-17     | 13:10      | Cloudy        | 76.5            | 79.3            | 73.4  | 76.7               | 76.5 Measured ≤ Baseline |
| 16-Jan-17     | 09:15      | Cloudy        | 65.3            | 67.1            | 60.9  | 70.7               | 65.3 Measured ≤ Baseline |
| 26-Jan-17     | 09:00      | Sunny         | 73.9            | 75.2            | 72.3  |                    | 73.9 Measured ≤ Baseline |

| Location M9 - | · Tak Long E | state   |                 |                       |       |                 |                          |  |  |  |  |
|---------------|--------------|---------|-----------------|-----------------------|-------|-----------------|--------------------------|--|--|--|--|
|               |              |         |                 | Unit: dB (A) (30-min) |       |                 |                          |  |  |  |  |
| Date          | Time         | Weather | Meas            | sured Noise           | Level | Baseline Level  | Construction Noise Level |  |  |  |  |
|               |              |         | L <sub>eq</sub> | L <sub>10</sub>       | L 90  | L <sub>eq</sub> | L <sub>eq</sub>          |  |  |  |  |
| 3-Jan-17      | 13:20        | Sunny   | 59.4            | 61.6                  | 55.9  |                 | 59.4 Measured ≤ Baseline |  |  |  |  |
| 12-Jan-17     | 13:30        | Cloudy  | 62.3            | 64.6                  | 59.9  | 59.9            | 58.6                     |  |  |  |  |
| 18-Jan-17     | 13:10        | Cloudy  | 63.6            | 65.3                  | 60.5  | 59.9            | 61.2                     |  |  |  |  |
| 23-Jan-17     | 09:15        | Sunny   | 64.5            | 66.4                  | 62.3  |                 | 62.7                     |  |  |  |  |

MA13043/App G - Noise Cinotech

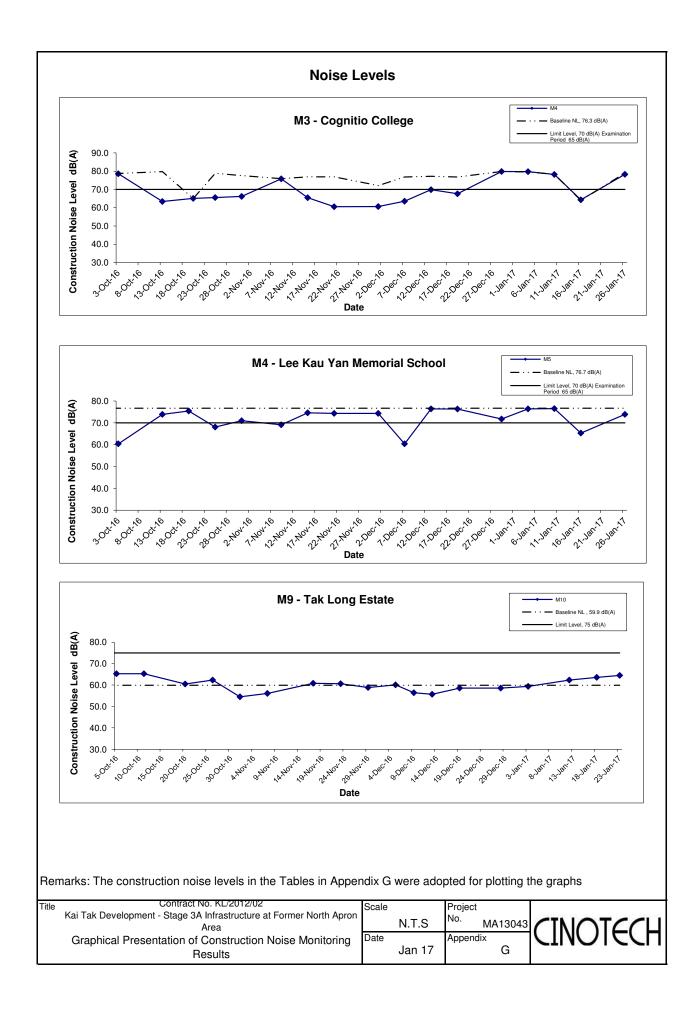

### APPENDIX H SUMMARY OF EXCEEDANCE

## Contract No. KL/2012/02 Kai Tak Development –Stage 3A Infrastructure at Former North Apron Area

## Appendix H – Summary of Exceedance

**Exceedance Report for Contract No. KL/2012/02** 

- (A) Exceedance Report for Air Quality (NIL in the reporting month)
- (B) Exceedance Report for Construction Noise (NIL in the reporting month)
- (C) Exceedance Report for Landscape and Visual (NIL in the reporting month)

### APPENDIX I SITE AUDIT SUMMARY

# Weekly Site Inspection Record Summary Inspection Information

| Checklist Reference Number | 170104         |
|----------------------------|----------------|
| ls .                       | 4 January 2017 |
| Time                       | 14:00 – 16:00  |

| Ref. No.   | Non-Compliance                                                                                                                                                 | Related<br>Item No. |
|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| -          | None identified                                                                                                                                                | Hem 140.            |
| Ref. No.   | Remarks/Observations                                                                                                                                           | Related Item No.    |
|            | B. Water Quality                                                                                                                                               |                     |
|            | No environmental deficiency was identified during site inspection.                                                                                             |                     |
|            | C. Air Quality                                                                                                                                                 |                     |
| 170104-R01 | The stockpiles of dusty material should be provided by impervious material to prevent the dusty emission near PERE, carpark, near VT1 and near Tsat Po Street. | C 7                 |
|            | D. Noise                                                                                                                                                       |                     |
|            | No environmental deficiency was identified during site inspection.                                                                                             |                     |
|            | E. Waste / Chemical Management                                                                                                                                 |                     |
| 170104-R02 | The construction waste should be cleared properly and regularly to prevent the accumulation at SW3.                                                            | E4ii                |
|            | F. Visual and Landscape                                                                                                                                        |                     |
|            | No environmental deficiency was identified during site inspection.                                                                                             |                     |
|            | G. Permits /Licences                                                                                                                                           |                     |
|            | No environmental deficiency was identified during site inspection.                                                                                             |                     |
|            | H. Others                                                                                                                                                      |                     |
|            | Follow-up on previous audit section (Ref. No.: 161228), all environmental were improved/rectified by the Contractor.                                           |                     |

|             | Name               | Signature | Date           |
|-------------|--------------------|-----------|----------------|
| Recorded by | Janet Wai          | 12        | 4 January 2017 |
| Checked by  | Dr. Priscilla Choy | NI        | 4 January 2017 |

#### Weekly Site Inspection Record Summary Inspection Information

| Checklist Reference Number | 170111          |
|----------------------------|-----------------|
| Date                       | 11 January 2017 |
| Time                       | 14:00 – 17:00   |

| Ref. No.   | Non-Compliance                                                                                                       | Related<br>Item No. |
|------------|----------------------------------------------------------------------------------------------------------------------|---------------------|
| -          | None identified                                                                                                      | -                   |
| Ref. No.   | Remarks/Observations                                                                                                 | Related<br>Item No. |
|            | B. Water Quality                                                                                                     |                     |
| 10.0000    | No environmental deficiency was identified during site inspection.                                                   |                     |
|            | C. Air Quality                                                                                                       |                     |
| 170111-001 | The accumulated muddy track on the haul road near the site entrance adjacent to the carpark should be cleared.       | C 3                 |
|            | D. Noise                                                                                                             |                     |
|            | No environmental deficiency was identified during site inspection.                                                   |                     |
|            | E. Waste / Chemical Management                                                                                       |                     |
|            | No environmental deficiency was identified during site inspection.                                                   |                     |
|            | F. Visual and Landscape                                                                                              |                     |
| 170111-R02 | The fencing of tree protection zone near VT1 should be properly erected and maintained.                              | F 1                 |
|            | G. Permits /Licences                                                                                                 |                     |
|            | No environmental deficiency was identified during site inspection.                                                   |                     |
|            | H. Others                                                                                                            |                     |
|            | Follow-up on previous audit section (Ref. No.: 170104), all environmental were improved/rectified by the Contractor. |                     |

|             | Name               | Signature | Date            |
|-------------|--------------------|-----------|-----------------|
| Recorded by | KC Chung           | Chy       | 11 January 2017 |
| Checked by  | Dr. Priscilla Choy | WI        | 11 January 2017 |

1

# Weekly Site Inspection Record Summary Inspection Information

| Checklist Reference Number | 170118          |  |
|----------------------------|-----------------|--|
| Date                       | 18 January 2017 |  |
| Time                       | 14:00 – 17:00   |  |

| Ref. No.   | Non-Compliance                                                                                                                                                               | Related             |
|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| -          | None identified                                                                                                                                                              | Item No.            |
| Ref. No.   | Remarks/Observations                                                                                                                                                         | Related<br>Item No. |
|            | B. Water Quality                                                                                                                                                             | Hem 140.            |
|            | No environmental deficiency was identified during site inspection.                                                                                                           |                     |
|            | C. Air Quality                                                                                                                                                               |                     |
|            | No environmental deficiency was identified during site inspection.                                                                                                           |                     |
|            | D. Noise                                                                                                                                                                     |                     |
|            | No environmental deficiency was identified during site inspection.                                                                                                           |                     |
|            | E. Waste / Chemical Management                                                                                                                                               |                     |
| 170118-R02 | Properly clear the oil stain near the tunnel access of VT1.                                                                                                                  | E 8                 |
|            | F. Visual and Landscape                                                                                                                                                      |                     |
| 170118-R01 | The fencing of tree protection zone near VT1 should be properly erected and maintained.                                                                                      | F 1                 |
|            | G. Permits /Licences                                                                                                                                                         |                     |
|            | No environmental deficiency was identified during site inspection.                                                                                                           |                     |
|            | H. Others                                                                                                                                                                    |                     |
|            | • Follow-up on previous audit section (Ref. No.: 170111), item 170111-R02 was found outstanding and remarked as 170118-R01. Review will be needed during next audit section. |                     |

|             | Name               | Signature | Date            |
|-------------|--------------------|-----------|-----------------|
| Recorded by | Janet Wai          | Ito       | 18 January 2017 |
| Checked by  | Dr. Priscilla Choy | WI        | 18 January 2017 |

# Weekly Site Inspection Record Summary Inspection Information

| Checklist Reference Number | 170124          |
|----------------------------|-----------------|
| Date                       | 24 January 2017 |
| Time                       | 14:00 – 16:30   |

| Ref. No.   | Non-Compliance                                                                                                                    | Related<br>Item No. |
|------------|-----------------------------------------------------------------------------------------------------------------------------------|---------------------|
| _          | None identified                                                                                                                   | <del>-</del>        |
| Ref. No.   | Remarks/Observations                                                                                                              | Related<br>Item No. |
|            | B. Water Quality                                                                                                                  |                     |
|            | No environmental deficiency was identified during site inspection.                                                                |                     |
|            | C. Air Quality                                                                                                                    |                     |
| 170124-O01 | Dusty stockpile placed at SW3 should be properly covered to suppress dust generation.                                             | C 7                 |
|            | D. Noise                                                                                                                          |                     |
|            | No environmental deficiency was identified during site inspection.                                                                |                     |
|            | E. Waste / Chemical Management                                                                                                    |                     |
| 170124-O02 | Wastes and construction materials at VT1 and near Tsat Po Street should be removed to prevent accumulation.                       | E 1 iii, 4 ii       |
| 170124-R03 | Chemical containers placed in SW3 should be properly removed or stored at appropriate storage area.                               | E 9                 |
|            | F. Visual and Landscape                                                                                                           |                     |
|            | No environmental deficiency was identified during site inspection.                                                                |                     |
|            | G. Permits /Licences                                                                                                              |                     |
|            | No environmental deficiency was identified during site inspection.                                                                |                     |
|            | H. Others                                                                                                                         |                     |
|            | Follow-up on previous audit section (Ref. No.: 170118), all environmental deficiencies were improved/rectified by the Contractor. |                     |

|             | Name               | Signature | Date            |
|-------------|--------------------|-----------|-----------------|
| Recorded by | KC Chung           | Olm       | 24 January 2017 |
| Checked by  | Dr. Priscilla Choy | WI        | 24 January 2017 |

### APPENDIX J EVENT ACTION PLANS

## Event/Action Plan for Air Quality

| EVENT              | ACTION                                     |                                       |                                   |                                      |  |
|--------------------|--------------------------------------------|---------------------------------------|-----------------------------------|--------------------------------------|--|
|                    | ET                                         | IEC                                   | ER                                | CONTRACTOR                           |  |
| Action Level being | Identify source and investigate the        | Check monitoring data submitted       | 1. Notify Contractor.             | Rectify any unacceptable practice;   |  |
| exceeded by        | causes of exceedance;                      | by ET;                                |                                   | 2. Amend working methods if          |  |
| one sampling       | 2. Inform Contactor, IEC and ER;           | 2. Check Contractor's working         |                                   | appropriate.                         |  |
|                    | 3. Repeat measurement to confirm finding.  | method.                               |                                   |                                      |  |
| Action Level being | Identify source and investigate the        | Check monitoring data submitted       | Confirm receipt of notification   | 1. Discuss with ET and IEC on proper |  |
| exceeded by        | causes of exceedance;                      | by ET;                                | of exceedance in writing;         | remedial actions;                    |  |
| two or more        | 2. Inform Contractor, IEC and ER;          | 2. Check Contractor's working         | 2. Notify Contractor;             | 2. Submit proposals for remedial     |  |
| consecutive        | 3. Increase monitoring frequency to daily; | method;                               | 3. In consolidation with the IEC, | actions to ER and IEC within three   |  |
| sampling           | 4. Discuss with IEC and Contractor on      | 3. Discuss with ET and Contractor on  | agree with the Contractor on the  | working days of notification;        |  |
|                    | remedial actions required;                 | possible remedial measures;           | remedial measures to be           | 3. Implement the agreed proposals;   |  |
|                    | 5. Assess the effectiveness of             | 4. Advise the ER on the effectiveness | implemented;                      | 4. Amend proposal if appropriate.    |  |
|                    | Contractor's remedial actions;             | of the proposed remedial measures.    | 4. Supervise implementation of    |                                      |  |
|                    | 6. If exceedance continues, arrange        |                                       | remedial measures;                |                                      |  |
|                    | meeting with IEC and ER;                   |                                       | 5. Conduct meeting with ET and    |                                      |  |
|                    | 7. If exceedance stops, cease additional   |                                       | IEC if exceedance continues.      |                                      |  |
|                    | monitoring.                                |                                       |                                   |                                      |  |
| Limit Level being  | Identify source and investigate the        | Check monitoring data submitted       | Confirm receipt of notification   | Take immediate action to avoid       |  |
| exceeded by        | causes of exceedance;                      | by ET;                                | of exceedance in writing;         | further exceedance;                  |  |
| one sampling       | 2. Inform Contractor, IEC, ER, and EPD;    | 2. Check Contractor's working         | 2. Notify Contractor;             | 2. Discuss with ET and IEC on proper |  |
|                    | 3. Repeat measurement to confirm finding;  | method;                               | 3. In consolidation with the IEC, | remedial actions;                    |  |
|                    | 4. Assess effectiveness of                 | 3. Discuss with ET and Contractor on  | agree with the Contractor on the  | 3. Submit proposals for remedial     |  |
|                    | Contractor's remedial actions and keep     | possible remedial measures;           | remedial measures to be           | actions to ER and IEC within three   |  |

|                   | EPD, IEC and ER informed of               | 4. Advise the ER on the              | implemented;                      | working days of notification;         |
|-------------------|-------------------------------------------|--------------------------------------|-----------------------------------|---------------------------------------|
|                   | the results.                              | effectiveness of the proposed        | 4. Supervise implementation of    | 4. Implement the agreed proposals.    |
|                   |                                           | remedial measures.                   | remedial measures;                |                                       |
|                   |                                           |                                      | 5. Conduct meeting with ET and    |                                       |
|                   |                                           |                                      | IEC if exceedance continues.      |                                       |
| Limit Level being | 1. Notify IEC, ER, Contractor and         | 1. Check monitoring data submitted   | Confirm receipt of notification   | 1. Take immediate action to avoid     |
| exceeded by       | EPD;                                      | by ET;                               | of exceedance in writing;         | further exceedance;                   |
| two or more       | 2. Repeat measurement to confirm          | 2. Check Contractor's working        | 2. Notify Contractor;             | 2. Discuss with ET, ER and IEC on     |
| consecutive       | findings;                                 | method;                              | 3. In consolidation with the IEC, | proper remedial actions;              |
| sampling          | 3. Carry out analysis of Contractor's     | 3. Discuss amongst ER, ET, and       | agree with the Contractor on the  | 3. Submit proposals for remedial      |
|                   | working procedures to identify source and | Contractor on the potential remedial | remedial measures to be           | actions to IEC within three working   |
|                   | investigate the causes of exceedance;     | actions;                             | implemented;                      | days of notification;                 |
|                   | 4. Increase monitoring frequency to       | 4. Review Contractor's remedial      | 4. Supervise implementation of    | 4. Implement the agreed proposals;    |
|                   | daily;                                    | actions whenever necessary to        | remedial measures;                | 5. Submit further remedial actions if |
|                   | 5. Arrange meeting with IEC, ER           | assure their effectiveness and       | 5. If exceedance continues,       | problem still not under control;      |
|                   | and Contractor to discuss the             | advise the ER accordingly.           | consider stopping the Contractor  | 6. Stop the relevant portion of works |
|                   | remedial actions to be taken;             |                                      | to continue working on that       | as instructed by the ER until the     |
|                   | 6. Assess effectiveness of                |                                      | portion of work which causes the  | exceedance is abated.                 |
|                   | Contractor's remedial actions and         |                                      | exceedance until the              |                                       |
|                   | keep EPD, IEC and ER informed             |                                      | exceedance is abated.             |                                       |
|                   | of the results;                           |                                      |                                   |                                       |
|                   | 7. If exceedance stops, cease additional  |                                      |                                   |                                       |
|                   | monitoring.                               |                                      |                                   |                                       |

## Event/Action Plan for Construction Noise

| EVENT        | ACTION                                 |                                   |                              |                                   |  |  |
|--------------|----------------------------------------|-----------------------------------|------------------------------|-----------------------------------|--|--|
|              | ET                                     | IEC                               | ER                           | CONTRACTOR                        |  |  |
| Action Level | 1. Notify ER, IEC and Contractor;      | Review the investigation          | 1. Confirm receipt of        | 1. Submit noise mitigation        |  |  |
| being        | 2. Carry out investigation;            | results submitted by the ET;      | notification of failure in   | proposals to IEC and ER;          |  |  |
| exceeded     | 3. Report the results of investigation | 2. Review the proposed remedial   | writing;                     | 2. Implement noise mitigation     |  |  |
|              | to the IEC, ER and Contractor;         | measures by the Contractor and    | 2. Notify Contractor;        | proposals.                        |  |  |
|              | 4. Discuss with the IEC and            | advise the ER accordingly;        | 3. In consolidation with the | (The above actions should be      |  |  |
|              | Contractor on remedial measures        | 3. Advise the ER on the           | IEC, agree with the          | taken within 2 working days after |  |  |
|              | required;                              | effectiveness of the proposed     | Contractor on the remedial   | the exceedance is identified)     |  |  |
|              | 5. Increase monitoring frequency to    | remedial measures.                | measures to be implemented;  |                                   |  |  |
|              | check mitigation effectiveness.        | (The above actions should be      | 4. Supervise the             |                                   |  |  |
|              | (The above actions should be taken     | taken within 2 working days after | implementation of remedial   |                                   |  |  |
|              | within 2 working days after the        | the exceedance is identified)     | measures.                    |                                   |  |  |
|              | exceedance is identified)              |                                   | (The above actions should be |                                   |  |  |
|              |                                        |                                   | taken within 2 working days  |                                   |  |  |
|              |                                        |                                   | after the exceedance is      |                                   |  |  |
|              |                                        |                                   | identified)                  |                                   |  |  |
| Limit Level  | 1. Inform IEC, ER, Contractor and      | 1. Discuss amongst ER, ET, and    | 1. Confirm receipt of        | 1. Take immediate action to       |  |  |
| being        | EPD;                                   | Contractor on the potential       | notification of failure in   | avoid further exceedance;         |  |  |
| exceeded     | 2. Repeat measurements to confirm      | remedial actions;                 | writing;                     | 2. Submit proposals for remedial  |  |  |
|              | findings;                              | 2. Review Contractor's remedial   | 2. Notify Contractor;        | actions to IEC and ER within 3    |  |  |
|              | 3. Increase monitoring frequency;      | actions whenever necessary to     | 3. In consolidation with the | working days of notification;     |  |  |
|              | 4. Identify source and investigate the | assure their effectiveness and    | IEC, agree with the          | 3. Implement the agreed           |  |  |
|              | cause of exceedance;                   | advise the ER accordingly.        | Contractor on the remedial   | proposals;                        |  |  |

| 5. Carry out analysis of Contractor's | (The above actions should be      | measures to be implemented;  | 4. Submit further proposal if     |
|---------------------------------------|-----------------------------------|------------------------------|-----------------------------------|
| working procedures;                   | taken within 2 working days after | 4. Supervise the             | problem still not under control;  |
| 6. Discuss with the IEC, Contractor   | the exceedance is identified)     | implementation of remedial   | 5. Stop the relevant portion of   |
| and ER on remedial measures           |                                   | measures;                    | works as instructed by the ER     |
| required;                             |                                   | 5. If exceedance continues,  | until the exceedance is abated.   |
| 7. Assess effectiveness of            |                                   | consider stopping the        | (The above actions should be      |
| Contractor's remedial actions and     |                                   | Contractor to continue       | taken within 2 working days after |
| keep IEC, EPD and ER informed of      |                                   | working on that portion of   | the exceedance is identified)     |
| the results;                          |                                   | work which causes the        |                                   |
| 8. If exceedance stops, cease         |                                   | exceedance until the         |                                   |
| additional monitoring.                |                                   | exceedance is abated.        |                                   |
| (The above actions should be taken    |                                   | (The above actions should be |                                   |
| within 2 working days after the       |                                   | taken within 2 working days  |                                   |
| exceedance is identified)             |                                   | after the exceedance is      |                                   |
|                                       |                                   | identified)                  |                                   |

## Event/Action Plan for Landscape and Visual

| EVENT                          |                     |                         | ACTION                                   |                         |
|--------------------------------|---------------------|-------------------------|------------------------------------------|-------------------------|
| ACTION<br>LEVEL                | ET                  | IEC                     | ER                                       | CONTRACTOR              |
| Design Check                   | 1. Check final      | 1. Check report.        | Undertake remedial design if necessary   |                         |
|                                | design conforms to  | 2. Recommend            |                                          |                         |
|                                | the requirements    | remedial design if      |                                          |                         |
|                                | of EP and prepare   | necessary               |                                          |                         |
|                                | report.             |                         |                                          |                         |
| Non-conformity on one occasion | 1. Identify Source  | 1. Check report         | Notify Contractor                        | Amend working methods   |
|                                | 2. Inform IEC and   | 2. Check Contractor's   | 2. Ensure remedial measures are properly | 2. Rectify damage and   |
|                                | ER                  | working method          | implemented                              | undertake any necessary |
|                                | 3. Discuss remedial | 3. Discuss with ET and  |                                          | replacement             |
|                                | actions with IEC,   | Contractor on possible  |                                          |                         |
|                                | ER and Contractor   | remedial measures       |                                          |                         |
|                                | 4. Monitor remedial | 4. Advise ER on         |                                          |                         |
|                                | actions until       | effectiveness of        |                                          |                         |
|                                | rectification has   | proposed remedial       |                                          |                         |
|                                | been completed      | measures.               |                                          |                         |
|                                |                     | 5. Check implementation |                                          |                         |
|                                |                     | of remedial measures.   |                                          |                         |
| Repeated Non-conformity        | 1. Identify Source  | 1. Check monitoring     | 1. Notify Contractor                     | Amend working methods   |
|                                | Inform IEC and      | report                  | 2. Ensure remedial measures are properly | 2. Rectify damage and   |

| E   | ER                   | 2. Check Contractor's  | implemented | undertake any necessary |
|-----|----------------------|------------------------|-------------|-------------------------|
| 2   | 2. Increase          | working method         |             | replacement             |
| r   | monitoring           | 3. Discuss with ET and |             |                         |
| f   | frequency            | Contractor on possible |             |                         |
| 3   | B. Discuss remedial  | remedial measures      |             |                         |
| 8   | actions with IEC,    | 4. Advise ER on        |             |                         |
| E   | ER and Contractor    | effectiveness of       |             |                         |
| 4   | 4. Monitor remedial  | proposed remedial      |             |                         |
| 8   | actions until        | measures               |             |                         |
| r   | rectification has    | 5. Supervise           |             |                         |
| l t | been completed       | implementation of      |             |                         |
| 5   | 5. If non-conformity | remedial measures.     |             |                         |
|     | stops, cease         |                        |             |                         |
|     | additional           |                        |             |                         |
| r   | monitoring           |                        |             |                         |

APPENDIX K ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE (EMIS)

Appendix K - Summary of Implementation Schedule of Mitigation Measures for Construction Phase

| <b>Types of Impacts</b> | Mitigation Measures                                                                                                                                                                                                                                                                                | Status |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
|                         | 8 times daily watering of the work site with active dust emitting activities.                                                                                                                                                                                                                      | ^      |
|                         | Implementation of dust suppression measures stipulated<br>in Air Pollution Control (Construction Dust) Regulation.<br>The following mitigation measures, good site practices<br>and a comprehensive dust monitoring and audit<br>programme are recommended to minimize cumulative<br>dust impacts. |        |
|                         | <ul> <li>Stockpiling site(s) should be lined with impermeable<br/>sheeting and bunded. Stockpiles should be fully<br/>covered by impermeable sheeting to reduce dust<br/>emission.</li> </ul>                                                                                                      | *      |
|                         | <ul> <li>Misting for the dusty material should be carried out<br/>before being loaded into the vehicle</li> <li>Any vehicle with an open load carrying area should</li> </ul>                                                                                                                      | ۸      |
|                         | have properly fitted side and tail boards.                                                                                                                                                                                                                                                         | ^      |
| Construction Dust       | <ul> <li>Material having the potential to create dust should not<br/>be loaded from a level higher than the side and tail<br/>boards and should be dampened and covered by a<br/>clean tarpaulin.</li> </ul>                                                                                       | ^      |
|                         | <ul> <li>The tarpaulin should be properly secured and should<br/>extent at least 300 mm over the edges of the sides and<br/>tailboards. The material should also be dampened if<br/>necessary before transportation.</li> </ul>                                                                    | ^      |
|                         | <ul> <li>The vehicles should be restricted to maximum speed<br/>of 10 km per hour and confined haulage and delivery<br/>vehicle to designated roadways insider the site. On-<br/>site unpaved roads should be compacted and kept free</li> </ul>                                                   | ^      |
|                         | of lose materials.  • Vehicle washing facilities should be provided at every                                                                                                                                                                                                                       |        |

| <ul> <li>The area where vehicle washing takes place and the<br/>section of the road between the washing facilities and<br/>the exit point should be paved with concrete,<br/>bituminous materials or hardcores.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | ٨   |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|
| <ul> <li>Every main haul road should be scaled with concrete<br/>and kept clear of dusty materials or sprayed with water<br/>so as to maintain the entire road surface wet.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | *   |
| <ul> <li>Every stock of more than 20 bags of cement should be<br/>covered entirely by impervious sheeting placed in an<br/>area sheltered on the top and the three sides.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | ٨   |
| <ul> <li>Every vehicle should be washed to remove any dusty<br/>materials from its body and wheels before leaving the<br/>construction sites.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | ۸   |
| <ul> <li>DWFI compound for JVBC: a DWFI compound is proposed at the downstream of JVC to contain pollution in drainage systems entering the KTAC and KTTS by interception facilities until the ultimate removal of the pollution sources. Tidal barriers and desiliting facilities will form part of the compounds to prevent any accumulation of sediment within the downstream section of JVBC and hence fully mitigate the potential odour emissions from the headspace of JVBC near the existing discharge locations. The odour generating operations within the proposed desilting compound will be fully enclosed and the odorous air will be collected and treated by high</li> </ul> | N/A |

| efficiency deodorizers before discharge to the<br>atmosphere.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|
| • Desilting compound for KTN: Two desilting compounds are proposed for KTN (at Site 1D6 and Site 1P1) to contain pollution in drainage systems entering the KTAC and KTTS by interception facilities until the ultimate removal of the pollution sources. Tidal barriers and desiliting facilities will form part of the compounds to prevent any accumulation of sediment within the downstream section of KTN and hence fully mitigate the potential odour emissions from the headspace of KTN near the existing discharge locations. The odour generating operations within the proposed desilting compound will be fully enclosed and the odorous air will be collected and treated by high efficiency deodorizers before discharge to the atmosphere. | N/A |
| • Decking or reconstruction of KTN within apron area: it is proposed to deck the KTN or reconstruct the KTN within the former Apron area into Kai Tak River from the south of Road D1 to the north of Road D2 along the existing alignment of KTN. The Kai Tak River will compose of a number of channels flowing with non-odorous fresh water and THEES effluent. The channel flowing with THEES effluent will be designed with the width of water surface of not more than 16m.                                                                                                                                                                                                                                                                          | N/A |

| • Localised maintenance dredging. Localised maintenance dredging should be conducted to provide water depth of not less than 3.5m over the whole of KTAC and KTTS. With reference to the water depth data recorded during the odour survey, only some of the areas in the northern part of KTAC (i.e. to the north of taxiway bridge) including the area near the northern edge of KTAC, the area near western bank of KTAC, and the area near the JVC discharge have water depths shallower than 3.5m. The area involved would be about 40% of the northern KTAC and the dredging depth required would be from about 2.7m to less than 1m. The maintenance dredging to be carried out prior to the occupation of any new development in the immediate vicinity of KTAC to avoid potential localized odour impacts at the future ASRs during the maintenance dredging operation. | N/A |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|
| <ul> <li>Improvement of water circulation in KTAC and KTTS: 600m gap opening at the northern part of the former Kal Tak runway, the water circulation in KTAC and KTTS would be substantially improved. Together with the improvement in water circulation, the DO level in KTAC and KTTS would also be increased.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | N/A |
| <ul> <li>In-situ sediment treatment by bioremediation:<br/>Bioremediation would be applied to the entire KTAC<br/>and KTTS.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | N/A |

|                    | Use of quiet PME, movable barriers barrier for Asphalt Paver, Breaker, Excavator and Hand-held breaker and full enclosure for Air Compressor, Bar Bender, Concrete Pump, Generator and Water Pump                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | ^   |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|
| Construction Noise | <ul> <li>Good Site Practice: <ul> <li>Only well-maintained plant should be operated on-site and plant should be serviced regularly during the construction program.</li> <li>Silencers or muttlers on construction equipment should be utilized and should be properly maintained during the construction program.</li> <li>Mobile plant, if any, should be sited as far away from NSRs as possible.</li> <li>Machines and plant (such as trucks) that may be in intermittent use should be shut down between works periods or should be throttled down to a minimum.</li> <li>Plant known to emit noise strongly in one direction should, wherever possible, be orientated so that the noise is directed away from the nearby NSRs.</li> <li>Material stockpiles and other structures should be effectively utilized, wherever practicable, in screening noise from on-site construction activities.</li> </ul> </li> </ul> | ^   |
|                    | Scheduling of Construction Works during School<br>Examination Period                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | ^   |
|                    | (i) Provision of low noise surfacing in a section of Road L2; and                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | N/A |
|                    | (ii) Provision of structural fins                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | N/A |

|                | void the sensitive façade of class room facing Road nd L4; and                                                                                                                                                                                                                                             | N/A |
|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|
| (ii) P<br>& L4 | rovision of low noise surfacing in a section of Road L2                                                                                                                                                                                                                                                    | N/A |
|                | ovision of low noise surfacing in a section of Road L4<br>e occupation of Site 1I1; and                                                                                                                                                                                                                    | N/A |
| (ii) S         | etback of building about 5m from site boundary.                                                                                                                                                                                                                                                            | N/A |
|                | ack of building about 35m to the northwest direction 3 and 5m at Site 1L2.                                                                                                                                                                                                                                 | N/A |
| (i)            | avoid any sensitive façades with openable window facing the existing Kowloon City Road network; and                                                                                                                                                                                                        | N/A |
| (ii)           | for the sensitive facades facing the To Kwa Wan direction, either setback the facades by about 5m to the northeast direction or do not provide the facades with openable window.                                                                                                                           | N/A |
| (i)            | avoid any sensitive facades with openable window facing the existing To Kwa Wan Road or                                                                                                                                                                                                                    | N/A |
| (ii)           | provision of 17.5m high noise tolerant building fronting To Kwa Wan Road and restrict the height of the residential block(s) located at less than 55m away from To Kwa Wan Road to no more than 25m above ground.                                                                                          | N/A |
| (i)            | avoid any sensitive facades with openable window facing the slip road connecting Prince Edward Road East and San Po Kong or other alternative mitigation measures and at-source mitigation measures for the surrounding new local roads to minimise the potential traffic noise impacts from the slip road | N/A |

| All the ventilation fans installed in the below will be provided with silencers or acoustics treatment.  (i) SPS  (ii) ESS  (iii) Tunnel Ventilation Shaft  (iv) EFTS depot | N/A<br>N/A<br>N/A<br>N/A |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
| Installation of retractable roof or other equivalent measures                                                                                                               | N/A                      |

|                               | The following mitigation measures are proposed to be incorporated in the design of the SPS at KTD, including:  • Dual power supply or emergency generator should be provided at all the SPSs to secure electrical power supply;  • Standby pumps should be provided at all SPSs to ensure smooth operation of the SPS during maintenance of the duty pumps;  • An alarm should be installed to signal emergency high | N/A<br>N/A |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
|                               | <ul> <li>water level in the wet well at all SPSs, and</li> <li>For all unmanned SPSs, a remote monitor system connecting SPSs with the control station through telemetry system should be provided so that swift actions could be taken in case of malfunction of unmanned facilities.</li> </ul>                                                                                                                    | N/A        |
| Construction Water<br>Quality | Construction Phase Marine-based Construction                                                                                                                                                                                                                                                                                                                                                                         |            |
|                               | Capital and Maintenance Dredging for Cruise Terminal  Mitigation measures for construction of the proposed                                                                                                                                                                                                                                                                                                           | N/A        |
|                               | cruise terminal should follow those recommended in the approved EIA for CT Dredging.                                                                                                                                                                                                                                                                                                                                 | IVA        |
|                               |                                                                                                                                                                                                                                                                                                                                                                                                                      |            |
|                               |                                                                                                                                                                                                                                                                                                                                                                                                                      |            |
|                               |                                                                                                                                                                                                                                                                                                                                                                                                                      |            |

| Fireboat Berth, Runway Opening and Road T2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |         |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| Silt curtains should be deployed around the close grab dredger to minimize release of sediment and other contaminants for any dredging and filling activities in open water.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | N/A     |
| Dredging at and near the seawall area for construction of<br>the public landing steps cum fireboat berth should be<br>carried out at a maximum production rate of 1,000m <sup>3</sup> per<br>day using one grab dredger.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | N/A     |
| The proposed construction method for runway opening should adopt an approach where the existing seawall at the runway will not be removed until completion of all excavation and dredging works for demolition of the runway. Thus, excavation of bulk fill and majority of the dredging works will be carried out behind the existing seawall, and the sediment plume can be effectively contained within the works area. As there is likely some accumulation of sediments alongside the runway, there will be a need to dredge the existing seabed after completion of all the demolition works. Dredging alongside the 600m opening should be carried out at a maximum production rate of 2,000m <sup>2</sup> per day using one grab dredger. | N/A     |
| Dredging for Road T2 should be conducted at a maximum rate of 8,000m³ per day (using four grab dredgers) whereas the sand filling should be conducted at a maximum rate of 2,000m³ per day (using two grab dredgers).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | N/A (1) |
| Silt screens shall be applied to seawater intakes at WSD seawater intake.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | N/A     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |         |

| Land-based Construction                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |     |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|
| Construction Runoff                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |     |
| Exposed soil areas should be minimised to reduce the potential for increased siltation, contamination of runoff, and erosion. Construction runoff related impacts associated with the above ground construction activities can be readily controlled through the use of appropriate mitigation measures which include:  use of sediment traps  adequate maintenance of drainage systems to prevent flooding and overflow                                                                                                                                                                                                                  | ^ ^ |
| Construction site should be provided with adequately designed perimeter channel and pre-treatment facilities and proper maintenance. The boundaries of critical areas of earthworks should be marked and surrounded by dykes or embankments for flood protection. Temporary ditches should be provided to facilitate runoff discharge into the appropriate watercourses, via a silt retention pond. Permanent drainage channels should incorporate sediment basins or traps and baffles to enhance deposition rates. The design of efficient silt removal facilities should be based on the guidelines in Appendix A1 of ProPECC PN 1/94. |     |

ideally, construction works should be programmed to minimise surface excavation works during the rainy season (April to September). All exposed earth areas should be completed as soon as possible after earthworks have been completed, or alternatively, within 14 days of the cessation of earthworks where practicable. If excavation of soil cannot be avoided during the rainy season, or at any time of year when rainstorms are likely, exposed slope surfaces should be covered by tarpaulin or other means. Λ Sediment tanks of sufficient capacity, constructed from pre-formed individual cells of approximately 6 to 8 m<sup>3</sup> capacity, are recommended as a general mitigation measure which can be used for settling surface runoff prior to disposal. The system capacity is flexible and able to handle multiple inputs from a variety of sources and particularly suited to applications where the influent is pumped. Open stockpiles of construction materials (for examples, aggregates, sand and fill material) of more than 50 m<sup>3</sup> should be covered with tarpaulin or similar fabric during rainstorms. Measures should be taken to prevent the washing away of construction materials, soil, silt or debris Λ into any drainage system. Manholes (including newly constructed ones) should always be adequately covered and temporarily sealed so as to prevent silt, construction materials or debris being washed into the drainage system and storm runoff being directed into foul sewers.

| Precautions to be taken at any time of year when rainstorms are likely, actions to be taken when a rainstorm is imminent or forecast, and actions to be taken during or after rainstorms are summarised in Appendix A2 of ProPECC PN 1/94. Particular attention should be paid to the control of silty surface runoff during storm events.                                                                                                                                                                                                                                                                                                            | ۸ |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| Oil interceptors should be provided in the drainage system and regularly cleaned to prevent the release of oils and grease into the storm water drainage system after accidental spillages. The interceptor should have a bypass to prevent flushing during periods of heavy rain.                                                                                                                                                                                                                                                                                                                                                                    | ^ |
| All vehicles and plant should be cleaned before leaving a construction site to ensure no earth, mud, debris and the like is deposited by them on roads. An adequately designed and located wheel washing bay should be provided at every site exit, and wash-water should have sand and silt settled out and removed at least on a weekly basis to ensure the continued efficiency of the process. The section of access road leading to, and exiting from, the wheel-wash bay to the public road should be paived with sufficient backfall toward the wheel-wash bay to prevent vehicle tracking of soil and silty water to public roads and drains. | ^ |
| It is recommended that on-site drainage system should be installed prior to the commencement of other construction activities. Sediment traps should be installed in order to minimise the sediment loading of the effluent prior to discharge into foul sewers. There should be no direct discharge of effluent from the site into the sea.                                                                                                                                                                                                                                                                                                          | ^ |

| All fuel tanks and storage areas should be provided with locks and be located on sealed areas, within bunds of a capacity equal to 110% of the storage capacity of the largest tank, to prevent spilled fuel oils from reaching the coastal waters of the Victoria Harbour WCZ.  Sewage Effluent  Construction work force sewage discharges on site are expected to be connected to the existing trunk sewer or sewage treatment facilities. The construction sewage may need to be handled by portable chemical toilets prior to the commission of the on-site sewer system. Appropriate numbers of portable toilets should be provided by a licensed contractor to serve the large number of construction workers over the construction site. The Contractor should also be responsible for waste disposal | ^ |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| Construction work force sewage discharges on site are expected to be connected to the existing trunk sewer or sewage treatment facilities. The construction sewage may need to be handled by portable chemical toilets prior to the commission of the on-site sewer system. Appropriate numbers of portable toilets should be provided by a licensed contractor to serve the large number of construction workers over the construction site. The Contractor should also be responsible for waste disposal                                                                                                                                                                                                                                                                                                   | ^ |
| expected to be connected to the existing trunk sewer or sewage treatment facilities. The construction sewage may need to be handled by portable chemical toilets prior to the commission of the on-site sewer system. Appropriate numbers of portable toilets should be provided by a licensed contractor to serve the large number of construction workers over the construction site. The Contractor should also be responsible for waste disposal                                                                                                                                                                                                                                                                                                                                                         |   |
| and maintenance practices.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | ^ |
| Stormwater Discharges                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |   |
| Minimum distances of 100 m should be maintained between the existing or planned stormwater discharges and the existing or planned seawater intakes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | ^ |

| Debris and Litter                                                                                                                                                                                                                                                                                  |   |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| In order to maintain water quality in acceptable conditions with regard to aesthetic quality, contractors should be required, under conditions of contract, to ensure that site management is optimised and that disposal of any solid materials. litter or wastes to marine waters does not occur | ۸ |
| Construction Works at or in Close Proximity of Storm<br>Culvert or Seafront                                                                                                                                                                                                                        |   |
| The proposed works should preferably be carried out within the dry season where the flow in the drainage channel /storm culvert/ nullah is low.                                                                                                                                                    | ^ |
| The use of less or smaller construction plants may be specified to reduce the disturbance to the bottom sediment at the drainage channel /storm culvert / nullah.                                                                                                                                  | ۸ |
| Temporary storage of materials (e.g. equipment, filling materials, chemicals and fuel) and temporary stockpile of construction materials should be located well away from any water courses during carrying out of the construction works.                                                         | ٨ |
| Stockpiling of construction materials and dusty materials should be covered and located away from any water courses.                                                                                                                                                                               | ۸ |
| Construction debris and spoil should be covered up and/or disposed of as soon as possible to avoid being washed into the nearby water receivers.                                                                                                                                                   | ٨ |
| Construction activities, which generate large amount of wastewater, should be carried out in a distance away from the waterfront, where practicable.                                                                                                                                               | ۸ |
|                                                                                                                                                                                                                                                                                                    |   |

| Mitigation measures to control site runoff from entering the nearby water environment should be implemented to minimize water quality impacts. Surface channels should be provided along the edge of the waterfront within the work sites to intercept the runoff. | ^   |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|
| Construction effluent, site run-off and sewage should be properly collected and/or treated.                                                                                                                                                                        | ۸   |
| Any works site inside the storm water courses should be temporarily isolated, such as by placing of sandbags or silt curtains with lead edge at bottom and properly supported props to prevent adverse impact on the storm water quality.                          | ٨   |
| Silt curtain may be installed around the construction activities at the seafront to minimize the potential impacts due to accidental spillage of construction materials.                                                                                           | ٨   |
| Proper shoring may need to be erected in order to prevent soil/mud from slipping into the storm culvert/drainage channel/sea.                                                                                                                                      | ۸   |
| Supervisory staff should be assigned to station on site to closely supervise and monitor the works                                                                                                                                                                 | ^   |
| Marine water quality monitoring and audit programme shall be implemented for the proposed sediment treatment operation.                                                                                                                                            | N/A |
|                                                                                                                                                                                                                                                                    |     |
|                                                                                                                                                                                                                                                                    |     |

| Good Site Practices It is not anticipated that adverse waste management related impacts would arise, provided that good site practices are adhered to. Recommendations for good site practices during construction activities include:  Nomination of an approved person, such as a site manager, to be responsible for good site practices, arrangements for collection and effective disposal to an appropriate facility, of all wastes generated at | ٨ |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| <ul> <li>the site</li> <li>Training of site personnel in proper waste management and chemical waste handling procedures</li> </ul>                                                                                                                                                                                                                                                                                                                     | ^ |
| <ul> <li>Provision of sufficient waste disposal points and<br/>regular collection for disposal</li> <li>Appropriate measures to minimise windblown litter</li> </ul>                                                                                                                                                                                                                                                                                   | ^ |
| and dust during transportation of waste by either<br>covering trucks or by transporting wastes in<br>enclosed containers                                                                                                                                                                                                                                                                                                                               | ^ |
| <ul> <li>A recording system for the amount of wastes<br/>generated, recycled and disposed of (including the<br/>disposal sites)</li> </ul>                                                                                                                                                                                                                                                                                                             | ^ |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                        |   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                        |   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                        |   |

| T | Waste Deduction Managemen                                                                                                                                                                                                                                                                                                                                             |     |
|---|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|
|   | Waste Reduction Measures  Good management and control can prevent the generation of a significant amount of waste. Waste reduction is best achieved at the planning and design stage, as well as by ensuring the implementation of good site practices. Recommendations to achieve waste reduction include:  • Sort C&D waste from demolition of the remaining        | ^   |
|   | structures to recover recyclable portions such as<br>metals                                                                                                                                                                                                                                                                                                           |     |
|   | <ul> <li>Segregation and storage of different types of<br/>waste in different containers, skips or stockpiles to<br/>enhance reuse or recycling of materials and their<br/>proper disposal</li> </ul>                                                                                                                                                                 | ^   |
|   | <ul> <li>Encourage collection of aluminium cans, PET<br/>bottles and paper by providing separate labelled<br/>bins to enable these wastes to be segregated from<br/>other general refuse generated by the work force</li> </ul>                                                                                                                                       | ۸   |
|   | Any unused chemicals or those with remaining functional capacity should be recycled                                                                                                                                                                                                                                                                                   | ۸   |
|   | <ul> <li>Proper storage and site practices to minimise the<br/>potential for damage or contamination of<br/>construction materials</li> </ul>                                                                                                                                                                                                                         | ^   |
|   | Dredged Marine Sediment                                                                                                                                                                                                                                                                                                                                               | N/A |
|   | The basic requirements and procedures for dredged mud disposal are specified under the ETWB TCW No. 34/2002. The management of the dredging, use and disposal of marine mud is monitored by the MFC, while the licensing of marine dumping is required under the Dumping at Sea Ordinance and is the responsibility of the Director of Environmental Protection (DEP) |     |
|   |                                                                                                                                                                                                                                                                                                                                                                       |     |

| The dredged marine sediments would be loaded onto barges and transported to the designated disposal sites allocated by the MFC depending on their level of contamination. Sediment classified as Category L would be suitable for Type 1 — Open Sea Disposal. Contaminated sediment would require either Type 1 — Open Sea Disposal (Dedicated Sites), Type 2 Confined Marine Disposal, or Type 3 — Special Treatment / Disposal and must be dredged and transported with great care in accordance with ETWB TCW No. 34/2002. Subject to the final allocation of the disposal sites by MFC, the dredged contaminated sediment must be effectively isolated from the environment and disposed properly at the designated disposal site. | N/A |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |     |

| monitoring devices as required under the Dumping at Sea Ordinance and as specified by the DEP  Barges or hopper barges should not be filled to a level that would cause the overflow of materials or sediment laden water during loading or transportation | monitoring devices as required under the Dumping at Sea Ordinance and as specified by the DEP  Barges or hopper barges should not be filled to a level that would cause the overflow of materials or sediment laden water during loading or | appropriate authorities that the contamination levels of the marine sediment to be dredged have been analysed and recorded. According to the ETWB TCW No. 34/2002, this will involve the submission of a formal Sediment Quality Report to the DEP, prior to the dredging contract being tendered. The contractor for the dredging works should apply for allocation of marine disposal sites and all necessary permits from relevant authorities for the disposal of dredged sediment. During transportation and disposal of the dredged marine sediments requiring Type 1, Type 2, or Type 3 disposal, the following measures should be taken to minimise potential impacts on water quality:  • Bottom opening of barges should be fitted with tight fitting seals to prevent leakage of material. Excess material should be cleaned from the decks and exposed fittings of barges and hopper dredgers before the vessel is moved  • Monitoring of the barge loading should be conducted to ensure that loss of material does not take place during transportation. Transport barges or vessels should be equipped with automatic self- | N/A<br>N/A |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
|                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                             | monitoring devices as required under the Dumping<br>at Sea Ordinance and as specified by the DEP  Barges or hopper barges should not be filled to a<br>level that would cause the overflow of materials or<br>sediment. laden water during loading or                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | N/A        |

| Mitigation measures and good site practices should be                                                                                                                                                                                                                                                                                                                  |   |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| incorporated into contract document to control potential environmental impact from handling and transportation of C&D material. The mitigation measures include:  • Where it is unavoidable to have transient stockpiles of C&D material within the Project work site pending collection for disposal, the transient stockpiles should be located away from waterfront | ^ |
| <ul> <li>Open stockpiles of construction materials or<br/>construction wastes on-site should be covered with<br/>tarpaulin or similar fabric</li> </ul>                                                                                                                                                                                                                | ٨ |
| Skip hoist for material transport should be totally enclosed by impervious sheeting                                                                                                                                                                                                                                                                                    | ^ |
| <ul> <li>Every vehicle should be washed to remove any<br/>dusty materials from its body and wheels before<br/>leaving a construction site</li> </ul>                                                                                                                                                                                                                   | ^ |
| <ul> <li>The area where vehicle washing takes place and<br/>the section of the road between the washing<br/>facilities and the exit point should be paved with<br/>concrete, bituminous materials or hardcores</li> </ul>                                                                                                                                              | ^ |
| <ul> <li>The load of dusty materials carried by vehicle<br/>leaving a construction site should be covered<br/>entirely by clean impervious sheeting to ensure<br/>dust materials do not leak from the vehicle</li> </ul>                                                                                                                                               | ^ |
| <ul> <li>All dusty materials should be sprayed with water<br/>prior to any loading, unloading or transfer<br/>operation so as to maintain the dusty materials wet</li> </ul>                                                                                                                                                                                           | ^ |
| <ul> <li>The height from which excavated materials are<br/>dropped should be controlled to a minimum<br/>practical height to limit fugitive dust generation<br/>from unloading</li> </ul>                                                                                                                                                                              | ۸ |
|                                                                                                                                                                                                                                                                                                                                                                        |   |

When delivering inert C&D material to public fill reception tacilities, the material should consist entirely of inert construction waste and of size less than 250mm or other sizes as agreed with the Secretary of the Public Fill Committee. In order to monitor the disposal of the surplus C&D material at the designed public fill reception facility and to control fly tipping, a trip-ticket system as stipulated in the ETWB TCW No. 31/2004 "Trip Ticket System for Disposal of Construction and Demolition Materials" should be included as one of the contractual requirements and implemented by an Environmental Team undertaking the Environmental Monitoring and Audit work. An Independent Environmental Checker should be responsible for auditing the results of the system.

## Chemical Waste

After use, chemical wastes (for example, cleaning fluids, solvents, lubrication oil and fuel) should be handled according to the Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes. Spent chemicals should be collected by a licensed collector for disposal at the CWTF or other licensed facility, in accordance with the Waste Disposal (Chemical Waste) (General) Regulation

#### General Refuse

General refuse should be stored in enclosed bins or compaction units separate from C&D material. A licensed waste collector should be employed by the contractor to remove general refuse from the site, separately from C&D material. Effective collection and storage methods (including enclosed and covered area) of site wastes would be required to prevent waste materials from being blown around by wind, wastewater discharge by flushing or leaching into the marine environment, or creating odour nuisance or pest and vermin problem

|                      | CM1 All existing trees should be carefully protected during construction.                                                                                                                                                                                                                                                   | *      |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
|                      | CM2 Trees unavoidably affected by the works should be transplanted where practical. Detailed transplanting proposal will be submitted to relevant government departments for approval in accordance with ETWBC 2/2004 and 3/2006. Final locations of transplanted trees should be agreed prior to commencement of the work. | N/A(1) |
| Landscape and Visual | CM3 Control of night-time lighting.                                                                                                                                                                                                                                                                                         |        |
|                      | CM4 Erection of decorative screen hoarding.                                                                                                                                                                                                                                                                                 | ^      |
|                      |                                                                                                                                                                                                                                                                                                                             |        |
|                      |                                                                                                                                                                                                                                                                                                                             |        |
|                      |                                                                                                                                                                                                                                                                                                                             |        |
|                      |                                                                                                                                                                                                                                                                                                                             |        |

| Remarks: | ^ Compliance of mitigation measure;                                                   | X Non-compliance of mitigation measure;          |
|----------|---------------------------------------------------------------------------------------|--------------------------------------------------|
|          | N/A Not Applicable at this stage;<br>N/A(1) Not observed;                             | •Non-compliance but rectified by the contractor; |
|          | * Recommendation was made during site audit but improved/rectified by the contractor. |                                                  |

APPENDIX L
SUMMARIES OF ENVIRONMENTAL
COMPLAINT, WARNING, SUMMON
AND NOTIFICATION OF SUCCESSFUL
PROSECUTION

## Contract No. KL/2012/02

# Kai Tak Development –Stage 3A Infrastructure at Former North Apron Area

Appendix L – Summary of environmental complaint, warning, summon and notification of successful prosecution

**Reporting Month**: January 2017

Contract No. KL/2012/02

| Log Ref. | Location | Received Date | Details of Complaint/warning/summon and prosecution | Investigation/Mitigation Action | Status |
|----------|----------|---------------|-----------------------------------------------------|---------------------------------|--------|
| N/A      | N/A      | N/A           | N/A                                                 | N/A                             | N/A    |

Remarks: No environmental complaint/warning/summon and prosecution were received in the reporting period.

APPENDIX M SUMMARY OF WASTE GENERATION AND DISPOSAL RECORDS

## MONTHLY SUMMARY WASTE FLOW TABLE FOR <u>2017</u> (YEAR)

|               | A                              | ctual Quantitie          | es of Inert C&I           | ) Materials Ge                 | nerated Monthl             | ly                       | Actua       | al Quantities of                  | f C&D Wastes | Generated Mo      | nthly                            |
|---------------|--------------------------------|--------------------------|---------------------------|--------------------------------|----------------------------|--------------------------|-------------|-----------------------------------|--------------|-------------------|----------------------------------|
| Month         | Total<br>Quantity<br>Generated | Borken<br>Concrete (4)   | Reused in the<br>Contract | Reused in<br>other<br>Projects | Disposal as<br>Public Fill | Import Fill              | Metals      | Paper /<br>Cardboard<br>Packaging | Plastics (3) | Chemical<br>Waste | Other, e.g.<br>general<br>refuse |
|               | [in '000m <sup>3</sup> ]       | [in '000m <sup>3</sup> ] | [in '000m <sup>3</sup> ]  | [in '000m <sup>3</sup> ]       | [in '000m <sup>3</sup> ]   | [in '000m <sup>3</sup> ] | [in '000kg] | [in '000kg]                       | [in '000kg]  | [in '000kg]       | [in '000m <sup>3</sup> ]         |
| JAN           | 3.72310                        | 0                        | 0                         | 0.15500                        | 3.40455                    | 0                        | 0           | 0                                 | 0            | 0                 | 0.16355                          |
| FEB           |                                |                          |                           |                                |                            |                          |             |                                   |              |                   |                                  |
| MAR           |                                |                          |                           |                                |                            |                          |             |                                   |              |                   |                                  |
| APR           |                                |                          |                           |                                |                            |                          |             |                                   |              |                   |                                  |
| MAY           |                                |                          |                           |                                |                            |                          |             |                                   |              |                   |                                  |
| JUNE          |                                |                          |                           |                                |                            |                          |             |                                   |              |                   |                                  |
| SUB-<br>TOTAL | 3.72310                        | 0                        | 0                         | 0.15500                        | 3.40455                    | 0                        | 0           | 0                                 | 0            | 0                 | 0.16355                          |
| JULY          |                                |                          |                           |                                |                            |                          |             |                                   |              |                   |                                  |
| AUG           |                                |                          |                           |                                |                            |                          |             |                                   |              |                   |                                  |
| SEPT          |                                |                          |                           |                                |                            |                          |             |                                   |              |                   |                                  |
| OCT           |                                |                          |                           |                                |                            |                          |             |                                   |              |                   |                                  |
| NOV           |                                |                          |                           |                                |                            |                          |             |                                   |              |                   |                                  |
| DEC           |                                |                          |                           |                                |                            |                          |             |                                   |              |                   |                                  |
| TOTAL         | 3.72310                        | 0                        | 0                         | 0.15500                        | 3.40455                    | 0                        | 0           | 0                                 | 0            | 0                 | 0.16355                          |

Contract No. : <u>KL/2012/02</u>

|                          | Forecast of Total Quantities of C&D materials to be Generated from the Contracts * |                          |                          |                          |                          |             |             |              |             |                          |
|--------------------------|------------------------------------------------------------------------------------|--------------------------|--------------------------|--------------------------|--------------------------|-------------|-------------|--------------|-------------|--------------------------|
| Total                    | Borken                                                                             | Reused in the            | Reused in                | Disposal as              | Import Fill              | Metals      | Paper /     | Plastics (3) | Chemical    | Other, e.g.              |
| Quantity                 | Concrete (4)                                                                       | Contract                 | other                    | <b>Public Fill</b>       | Import rm                | Metais      | Cardboard   | Flastics (5) | Waste       | general                  |
| [in '000m <sup>3</sup> ] | [in '000m <sup>3</sup> ]                                                           | [in '000m <sup>3</sup> ] | [in '000m <sup>3</sup> ] | [in '000m <sup>3</sup> ] | [in '000m <sup>3</sup> ] | [in '000kg] | [in '000kg] | [in '000kg]  | [in '000kg] | [in '000m <sup>3</sup> ] |
| 27.972                   | 26.472                                                                             | 0                        | 0                        | 0                        | 0                        | 0           | 0.9         | 0            | 1.8         | 1.5                      |

Notes: (1) The waste flow table shall also include C&D materials that are specified in the Contract to be imported for use at the site.

(2) Plastics refer to plastic bottles / containers, plastic sheets / foam from packaging material.

## MATERIALAB CONSULTANTS LIMITED

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, : (852)-24508238 : (852)-24508032 Fax Hong Kong. Email : mcl@fugro.com



## Appendix B

**Monthly EM&A Report** For Contract No. KL/2012/03 Kai Tak Development - Stage 4 Infrastructure at North Apron Area

# Civil Engineering and Development Department

EP-344/2009 – New Sewage Pumping Stations Serving KTD EP-337/2009 – New Distributor Roads Serving the Planned KTD

Contract No. KL/2012/03
Kai Tak Development –Stage 4 Infrastructure
at Former North Apron Area

Monthly EM&A Report

January 2017

(Version 1.0)

Approved By

(Environmental Team Leader)

REMARKS:

The information supplied and contained within this report is, to the best of our knowledge, correct at the time of printing.

CINOTECH accepts no responsibility for changes made to this report by third parties

## CINOTECH CONSULTANTS LTD

Room 1710, Technology Park, 18 On Lai Street, Shatin, NT, Hong Kong Tel: (852) 2151 2083 Fax: (852) 3107 1388 Email: <u>info@cinotech.com.hk</u>



Cinotech Consultants Limited Room 1710, Technology Park, 18 On Lai Street, Shatin, New Territories

For the attention of: Dr. Priscilla Choy

Subject: Contract No. KL/2012/03 Kai Tak Development – Stage 4

Infrastructure at Former North Apron Area

Verification for Monthly EM&A Report (January 2017)

(Draft Mrpt1701 v1.0)

Our ref: EB001399-320/THW17-31821

Your ref:

Date: 13 February 2017

Dear Dr. Choy,

We have no further comments on the revised report received via e-mail dated 13 February 2017 and hereby verify the report.

Should you have any queries, please feel free to contact the undersigned on 2911 2744.

Yours faithfully, For and on behalf of Arcadis Design & Engineering Limited

Independent Environmental Checker

cc. Mr. John Yam (AECOM) (By-email)

FN/my

ARCADIS DESIGN & ENGINEERING LIMITED

20/F, AXA Tower, Landmark East 100 How Ming Street Kwun Tong, Kowloon Hong Kong

Tel +852 2911 2233 Fax +852 2805 5028 arcadis.com

By Email

# TABLE OF CONTENTS

| EX        | ECUTIVE SUMMARY                                                                  | 1      |
|-----------|----------------------------------------------------------------------------------|--------|
|           | Introduction                                                                     | 1      |
|           | Environmental Monitoring Works                                                   | 1      |
|           | Environmental Licenses and Permits                                               | 2      |
|           | Key Information in the Reporting Month                                           | 2      |
|           | Future Key Issues.                                                               | 2      |
| 1.        | INTRODUCTION                                                                     | 4      |
|           | Background                                                                       |        |
|           | Project Organizations                                                            | 4      |
|           | Construction Activities undertaken during the Reporting Month                    | 5      |
|           | Summary of EM&A Requirements                                                     | 6      |
|           | Status of Compliance with Environmental Permits Conditions                       | 8      |
| 2.        | AIR QUALITY                                                                      | 0      |
| 4.        | Monitoring Requirements                                                          | 9<br>Q |
|           | Monitoring Locations                                                             |        |
|           | Monitoring Equipment                                                             |        |
|           | Monitoring Parameters, Frequency and Duration                                    |        |
|           | Monitoring Methodology and Quality Assurance and Quality Control (QA/QC) Procedu | ire10  |
|           | Results, Observations and Action/Limit Level Exceedance                          | 12     |
| 2         | NOICE                                                                            | 1.4    |
| 3.        | NOISE                                                                            | 14     |
|           | Monitoring Requirements                                                          |        |
|           | Monitoring Locations                                                             |        |
|           | Monitoring Parameters, Frequency and Duration                                    | 14     |
|           | Monitoring Methodology and QA/QC Procedures                                      | 15     |
|           | Maintenance and Calibration                                                      | 15     |
|           | Results, Observations and Action/Limit Level Exceedance                          | 16     |
|           |                                                                                  |        |
| 4.        | COMPARISON OF EM&A RESULTS WITH EIA PREDICTIONS                                  | 17     |
| <b>5.</b> | LANDSCAPE AND VISUAL                                                             | 19     |
|           | Monitoring Requirements                                                          |        |
|           | Results and Observations                                                         |        |
| (         | ENVIRONMENTAL AUDIT                                                              | 20     |
| 6.        |                                                                                  |        |
|           | Site Audits Status of Environmental Licensing and Permitting                     |        |
|           | Status of Waste Management                                                       |        |
|           | Implementation Status of Environmental Mitigation Measures                       | 21     |
|           | Summary of Mitigation Measures Implemented                                       |        |
|           | Implementation Status of Event Action Plans                                      | 22     |
|           | Summary of Complaint, Warning, Notification of any Summons and Successful Prosec | ıtion  |
|           |                                                                                  |        |
| 7         |                                                                                  |        |
| 7.        | FUTURE KEY ISSUES                                                                |        |
|           | Key Issues for the Coming Month                                                  | 24     |
|           |                                                                                  |        |
| 8.        | CONCLUSIONS AND RECOMMENDATIONS                                                  | 26     |
|           | Conclusions                                                                      | 26     |
|           | Recommendations                                                                  |        |
|           | Effectiveness of Environmental Management                                        | 27     |

# LIST OF TABLES

| Table I   | Breaches of Action and Limit Levels for the Project in the Reporting Month           |
|-----------|--------------------------------------------------------------------------------------|
| Table II  | Summary Table for Key Information in the Reporting Month                             |
| Table 1.1 | Key Project Contacts                                                                 |
| Table 1.2 | Construction Programme Showing the Inter-Relationship with Environmental             |
|           | Protection/Mitigation Measures                                                       |
| Table 1.3 | Air Quality and Noise Monitoring Stations for this Project                           |
| Table 1.4 | Summary Table for Required Submission under EP No. EP-337/2009                       |
| Table 1.5 | Summary Table for Required Submission under EP No. EP-344/2009                       |
| Table 2.1 | Locations for Air Quality Monitoring                                                 |
| Table 2.2 | Air Quality Monitoring Equipment                                                     |
| Table 2.3 | Impact Dust Monitoring Parameters, Frequency and Duration                            |
| Table 2.4 | Major dust source identified at the designated air quality monitoring stations       |
| Table 3.1 | Noise Monitoring Stations                                                            |
| Table 3.2 | Noise Monitoring Equipment                                                           |
| Table 3.3 | Noise Monitoring Parameters, Frequency and Duration                                  |
| Table 3.4 | Major noise source identified at the designated noise monitoring stations            |
| Table 3.5 | Baseline Noise Level and Noise Limit Level for Monitoring Stations                   |
| Table 4.1 | Comparison of 1-hr TSP data with EIA predictions                                     |
| Table 4.2 | Comparison of 24-hr TSP data with EIA predictions                                    |
| Table 4.3 | Comparison of Noise Monitoring Data with EIA predictions                             |
| Table 6.1 | Summary of Environmental Licensing and Permit Status                                 |
| Table 6.2 | Observations and Recommendations of Site Inspections for EP-337/2009                 |
| Table 6.3 | Observations and Recommendations of Site Inspections for EP-344/2009                 |
| Table 7.1 | Summary of the tentative program of major site activities, the impact prediction and |
|           | control measures for February and March 2017                                         |
| Table 8.1 | Examples of Mitigation Measures for Environmental Recommendations                    |

# LIST OF FIGURES

| Figure 1 | Layout Plan of the Project Site                     |
|----------|-----------------------------------------------------|
| Figure 2 | Locations of Air Quality Monitoring Stations        |
| Figure 3 | Locations of Construction Noise Monitoring Stations |
| Figure 4 | Locations of Wind Anemometer                        |
| Figure 5 | Management Structure                                |

## LIST OF APPENDICES

| A | Action and Limit Levels for Air Quality and Noise                         |
|---|---------------------------------------------------------------------------|
| В | Copies of Calibration Certificates                                        |
| C | Weather Information                                                       |
| D | Environmental Monitoring Schedules                                        |
| E | 1-hour TSP Monitoring Results and Graphical Presentations                 |
| F | 24-hour TSP Monitoring Results and Graphical Presentations                |
| G | Noise Monitoring Results and Graphical Presentations                      |
| Н | Summary of Exceedance                                                     |
| I | Site Audit Summary                                                        |
| J | Event Action Plans                                                        |
| K | Environmental Mitigation Implementation Schedule (EMIS)                   |
| L | Summaries of Environmental Complaint, Warning, Summon and Notification of |
|   | Successful Prosecution                                                    |
| M | Summary of Waste Generation and Disposal Records                          |
| N | Construction Programme                                                    |

## **EXECUTIVE SUMMARY**

#### Introduction

- 1. This is the 38<sup>th</sup> Monthly Environmental Monitoring and Audit (EM&A) Report prepared by Cinotech Consultants Ltd. for "Contract No. KL/2012/03 Kai Tak Development –Stage 4 Infrastructure at Former North Apron Area" (Hereafter referred to as "the Project"). This contract comprises the construction of Schedule 2 Designated Projects (DP) Road D2 & Sewage Pumping Station PS2 and PS NPS which forms a part of the works under two Environmental Permits (EP), EP-337/2009 and EP-344/2009. The title of the designated projects under Environmental Permit No.: EP-344/2009 is "New sewage pumping stations serving Kai Tak Development" and under Environmental Permit No.: EP-337/2009 is "New distributor roads serving the planned Kai Tak Development". This report documents the findings of EM&A Works conducted from 1 to 31 January 2017.
- 2. The major site activities undertaken in the reporting month included:
  - Daily Cleaning;
  - Installation of hand-railing & ladder inside Box Culvert B5;
  - Construction of staircase and landing and E&M Works at PS2;
  - Water test, backfill and sheet-pile removal in Heading 7A;
  - Segment tunneling, backfill and sheet-pile removed chamber construction in Heading 7B;
  - Outfall construction at Box Culvert B6;
  - Road widening works (excavation and UU works) at Sung Wong Toi Road;
  - Maintenance & Servicing Engineer's Office at Portion 9;
  - Lay HDPE pipe at Pit 1 and 9;
  - Pipe jacking at Pit 4;
  - Chamber construction at Pit 5;
  - Installation of drainage, UU laying works and Road works at Road D2;
  - Finishing works and E&M works at NPS;
  - UU works and Road works at Road L19 & Bailey St; and
  - Storage of excavated material at Portion 6.

## **Environmental Monitoring Works**

- 3. Environmental monitoring for the Project was performed in accordance with the EM&A Manual and the monitoring results were checked and reviewed. Site Inspections/Audits were conducted once per week. The implementation of the environmental mitigation measures, Event Action Plans and environmental complaint handling procedures were also checked.
- 4. Summary of the breaches of action and limit levels in the reporting month for the Project is tabulated in **Table I**.

Table I Breaches of Action and Limit Levels for the Project in the Reporting Month

| Danamatan | No. of Project-rela | Action Taken |              |
|-----------|---------------------|--------------|--------------|
| Parameter | Action Level        | Limit Level  | Action Taken |
| 1-hr TSP  | 0                   | 0            | N/A          |
| 24-hr TSP | 0                   | 0            | N/A          |
| Noise     | 0                   | 0            | N/A          |

## 1-hour & 24-hour TSP Monitoring

- 5. 1-hour TSP monitoring at AM4(A) EMSD Workshop was cancelled due to unsuccessful accessibility to the facility. 1-hr TSP monitoring was conducted at AM4(B) – Ma Tau Kok Road (next to EMSD workshop) temporarily.
- 6. All other 1-hour TSP monitoring was conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded.
- 7. 24-hour TSP monitoring at AM4(A) EMSD Workshop was cancelled due to unsuccessful accessibility to the facility. The alternative monitoring location was pending in the reporting month.
- 8. All other 24-hour TSP monitoring was conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded.

Construction Noise Monitoring

9. All construction noise monitoring was conducted as scheduled in the reporting month. No Action and Limit Level exceedance was recorded.

#### **Environmental Licenses and Permits**

- 10. Licenses/Permits granted to the Project include the Environmental Permit (EP) for the Project, Environmental Permits No. EP-344/2009 and EP-337/2009 were issued on 23 April 2009.
- 11. Registration of Chemical Waste Producer (Waste Producer Number: 5213-286-K2958-05).
- 12. Water Discharge License (WT00020971-2015).
- 13. Construction Noise Permit (GW-RE0964-16).

## **Key Information in the Reporting Month**

14. Summary of complaint received, reporting changes and notifications of any summons and successful prosecutions in the reporting month is tabulated in **Table II**.

Table II Summary Table for Key Information in the Reporting Month

| Event                                                | Event Details |        | Action Taken | Status | Remark |
|------------------------------------------------------|---------------|--------|--------------|--------|--------|
|                                                      | Number        | Nature |              |        |        |
| Complaint received                                   | 0             |        | N/A          | N/A    |        |
| Reporting Changes                                    | 0             |        | N/A          | N/A    |        |
| Notifications of any summons & prosecutions received | 0             |        | N/A          | N/A    |        |

## **Future Key Issues**

- 15. The future key environmental issues in the coming month include:
  - Dust generation from stockpiles of dusty materials, exposed site area, excavation works and rock breaking activities;
  - Water spraying for dust generating activity and on haul road;
  - Proper storage of construction materials on site;

- Storage of chemicals/fuel and chemical waste/waste oil on site; Accumulation of general and construction waste on site; Noise from operation of the equipment, especially for rock-breaking activities, piling works and machinery on-site; and Review and implementation of temporary drainage system for the surface runoff.

## 1. INTRODUCTION

## **Background**

- 1.1 The Kai Tak Development (KTD) is located in the south-eastern part of Kowloon Peninsula, comprising the apron and runway areas of the former Kai Tak Airport and existing waterfront areas at To Kwa Wan, Ma Tau Kok, Kowloon Bay, Kwun Tong and Cha Kwo Ling. It covers a land area of about 328 hectares. Stage 4 Infrastructure at Former North Apron Area is one of the construction stages of KTD. Schedule 2 DPs in this Project include new distributor roads serving the planned KTD and new sewage pumping stations serving the planned KTD. The general layout of the Project is shown in **Figure 1.**
- 1.2 Two Environmental Permits (EPs) No. EP-344/2009 and EP-337/2009 were also issued to the Permit Holder Civil Engineering and Development Department on 23 April 2009 for new sewage pumping stations serving the planned KTD and new distributor roads serving the planned KTD respectively.
- 1.3 A study of environmental impact assessment (EIA) was undertaken to identify the key issues of air quality, noise, water quality, waste, land contamination, cultural heritage and landscape and visual impact, and recommend possible mitigation measures associated with the works. The EIA Report (Register No. AEIAR-130/2009) was approved by the Environmental Protection Department (EPD) on 4 April 2009.
- 1.4 Cinotech Consultants Limited (Cinotech) is commissioned by Kwan On Construction Co., Ltd. (the Contractor) to undertake the role of the Environmental Team (ET) for the Contract No. KL/2012/03 Stage 4 Infrastructure at Former North Apron Area. The construction work under KL/2012/03 comprises the construction of Road D2 & Sewage Pumping Station PS2 and PS NPS which forms a part of the works under two EPs (EP-337/2009 and EP-344/2009).
- 1.5 The construction commencement of this Contract was on 1<sup>st</sup> December 2013 for Road D2, Sewage Pumping Station PS2 and PS NPS. This is the 38<sup>th</sup> Monthly EM&A report summarizing the EM&A works for the Project from 1 to 31 January 2017.

## **Project Organizations**

- 1.6 Different parties with different levels of involvement in the project organization include:
  - Project Proponent Civil Engineering and Development Department (CEDD).
  - The Engineer and the Engineer's Representative (ER) AECOM.
  - Environmental Team (ET) Cinotech Consultants Limited (CCL).
  - Independent Environmental Checker (IEC) Arcadis Design & Engineering Limited. (Arcadis).
  - Contractor –Kwan On Construction Co., Ltd. (Kwan On).

1.7 The key contacts of the Project are shown in **Table 1.1** and **Figure 5**.

Table 1.1 **Key Project Contacts** 

| Party    | Role                                    | Contact Person               | Position                                        | Phone No.                               | Fax No.   |
|----------|-----------------------------------------|------------------------------|-------------------------------------------------|-----------------------------------------|-----------|
| CEDD     | Project<br>Proponent                    | Mr. C. K. Choi               | Senior Engineer                                 | 2301 1174                               | 2301 1277 |
| AECOM    | Engineer's Representative               | Mr. John Yam<br>Mr. Ivan Yim | SRE<br>RE                                       | 2798 0771                               | 3013 8864 |
|          | Environmental<br>Team                   | Dr. Priscilla Choy           | Environmental<br>Team Leader                    | 2151 2089                               |           |
| Cinotech |                                         | Ms. Ivy Tam                  | Project Coordinator<br>and Audit Team<br>Leader | 2151 2090                               | 3107 1388 |
| Arcadis  | Independent<br>Environmental<br>Checker | Mr. Wong Fu Nam              | Independent<br>Environmental<br>Checker         | 2911 2744                               | 2805 5028 |
| Kwan On  | Contractor                              | Mr. Albert Ng                | Site Agent                                      | 3689 7752<br>6146 6763<br>telephone nur |           |

## **Construction Activities undertaken during the Reporting Month**

- 1.8 The site activities undertaken in the reporting month included:
  - Daily Cleaning;
  - Installation of hand-railing & ladder inside Box Culvert B5;
  - Construction of staircase and landing and E&M Works at PS2;
  - Water test, backfill and sheet-pile removal in Heading 7A;
  - Segment tunneling, backfill and sheet-pile removed chamber construction in Heading 7B;
  - Outfall construction at Box Culvert B6;
  - Road widening works (excavation and UU works) at Sung Wong Toi Road;
  - Maintenance & Servicing Engineer's Office at Portion 9;
  - Lay HDPE pipe at Pit 1 and 9;
  - Pipe jacking at Pit 4;
  - Chamber construction at Pit 5;
  - Installation of drainage, UU laying works and Road works at Road D2;
  - Finishing works and E&M works at NPS;
  - UU works and Road works at Road L19 & Bailey St; and
  - Storage of excavated material at Portion 6.
- 1.9 The construction programme showing the inter-relationship with environmental protection/mitigation measures is presented in **Table 1.2**.

Table 1.2 Construction Programme Showing the Inter-Relationship with Environmental Protection/Mitigation Measures

| Protection/witugation weasures                                                                                                                                                                                                               |                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                    |  |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|
| Construction Works                                                                                                                                                                                                                           | Generated Major<br>Environmental Impact  | Control Measures                                                                                                                                                                                                                                                                                                                                                                                                                   |  |  |
| Construction of superstructure of Pumping Station PS2 and NPS;                                                                                                                                                                               | Dust, Water Quality, Waste<br>Management | <ul> <li>Sufficient watering of the works site with active dust emitting activities;</li> <li>Properly cover the stockpiles;</li> <li>Appropriate desilting/sedimentation devices provided on site for treatment before discharge;</li> <li>Well maintain the drainage system to prevent the spillage of wastewater during heavy rainfall; and</li> <li>On-site waste sorting and implementation of trip ticket system.</li> </ul> |  |  |
| Backfilling between sewerage manholes 1K1_1 and FMH10_340 and construction of manhole FMH10_370a at L6;                                                                                                                                      | Dust, Noise                              | <ul> <li>Use of quiet plant and well-maintained construction plant; and</li> <li>Properly cover the stockpiles;</li> </ul>                                                                                                                                                                                                                                                                                                         |  |  |
| Installation of precast unit and construction of in-situ portions of Box Culvert B6; Construction of jacking pits nos. 1 and 2; Installation of gas pipe at pit no. 10; Construction of washout chamber at pit no.                           | Noise, Waste Management                  | <ul> <li>Use of quiet plant and well-maintained construction plant; and</li> <li>Provide hoarding.</li> <li>Good management and control on construction waste reduction</li> </ul>                                                                                                                                                                                                                                                 |  |  |
| Construction of sewerage<br>manhole FMH 10 at Bailey<br>Street; Widening works of Sung<br>Wong Toi Road.                                                                                                                                     | Noise                                    | <ul> <li>Use of quiet plant and well-maintained construction plant; and</li> <li>Provide hoarding.</li> </ul>                                                                                                                                                                                                                                                                                                                      |  |  |
| Pipe laying from manhole SMH2204 to Box Culvert B6; Laying of rising mains from PS2 to chainage CHA-18; Pipe laying from stormwater manholes SMH1962 to SMH1963 and construction of manholes SMH1953 and SMH1963 at L6; Installation of DCS; | Noise, Water Quality                     | <ul> <li>Use of quiet plant and well-maintained construction plant; and</li> <li>Well maintain the drainage system to prevent the spillage of wastewater during heavy rainfall.</li> </ul>                                                                                                                                                                                                                                         |  |  |

## **Summary of EM&A Requirements**

- 1.10 The EM&A programme requires construction noise monitoring, air quality monitoring, landscape and visual monitoring and environmental site audit. The EM&A requirements for each parameter are described in the following sections, including:
- All monitoring parameters;
- Action and Limit levels for all environmental parameters;
- Event Action Plans;
- Environmental requirements and mitigation measures, as recommended in the EM&A Manual under the EP.
- 1.11 The advice on the implementation status of environmental protection and pollution control/mitigation measures is summarized in Section 6 of this report.
- 1.12 This report presents the implementation of the EM&A programme for the Project from 1 to 31 January 2017.

1.13 Air quality monitoring stations within 500m and noise monitoring stations within 300m from the boundary of this Project are considered as relevant monitoring locations. In such regard, the relevant air quality and noise monitoring locations are tabulated in **Table 1.3** (see Figure 2 and 3 for their locations).

Table 1.3 Air Quality and Noise Monitoring Stations for this Project

| Locations                                 | Monitoring Stations In accordance with EM&A Manual | Alternative Monitoring Stations               |  |  |
|-------------------------------------------|----------------------------------------------------|-----------------------------------------------|--|--|
| Air Quality Monitoring Stations           |                                                    |                                               |  |  |
| AM2 - Lee Kau Yan Memorial School         | Yes                                                | N/A                                           |  |  |
| AM3 – Sky Tower                           | No                                                 | AM3(A) – Holy Trinity Bradbury Centre         |  |  |
| AM4 – Grand Waterfront                    | No                                                 | AM4(A) – EMSD Workshop*                       |  |  |
| AM5 – CCC Kei To Secondary School         | No                                                 | AM5(A) – Po Leung Kuk Ngan Po Ling<br>College |  |  |
| AM6 – Site 1B4 (Planned)                  |                                                    | N/A                                           |  |  |
| Noise Monitoring Stations                 |                                                    |                                               |  |  |
| M6 – Holy Carpenter Primary School        | No                                                 | M6(A) – Oblate Primary School                 |  |  |
| M7 – CCC Kei To Secondary School          | Yes                                                | N/A                                           |  |  |
| M8 – Po Leung Kuk Ngan Po Ling<br>College | Yes                                                | N/A                                           |  |  |
| M9 – Tak Long Estate                      | Yes                                                | N/A                                           |  |  |
| M10 – Site 1B4 (Planned)                  |                                                    | N/A                                           |  |  |

## Remarks:

- "Yes" Monitoring station is the same as that stated in EM&A Manual
- No Monitoring station is not the same as that stated in EM&A Manual. Request for carrying monitoring works at the monitoring stations stated in EM&A Manual was rejected by owner of premise. Alternative monitoring stations were proposed by the ET of Schedule 3 EIA and approved by the EPD.
- N/A No alternative monitoring station is required.
- \*AM4(A) EMSD Workshop was cancelled due to unsuccessful accessibility of the facility. 1-hr TSP monitoring was conducted at AM4(B) - Ma Tau Kok Road (next to EMSD workshop) temporarily.
- 1.14 According to the Environmental Monitoring and Audit Manual (EM&A Manual) of the Kai Tak Development (KTD) Schedule 3 Environmental Impact Assessment (EIA) Report, the impact monitoring at the designated monitoring stations as required in KTD EM&A Manual under the EP, has been conducted in Environmental Monitoring Works for Kai Tak Development under Schedule 3 of KTD, which is on-going starting from December 2010. The impact monitoring data under Schedule 3 of KTD will be adopted for the Project. Therefore, this report presents the air quality and noise monitoring works extracted from Schedule 3 of KTD.

#### **Status of Compliance with Environmental Permits Conditions**

1.15 The status of required submission related to this Project under the Environmental Permits No. EP-337/2009 and EP-344/2009 is summarized in the **Table 1.4** and **Table 1.5** respectively:

Table 1.4 Summary Table for Required Submission under EP No. EP-337/2009

| <b>EP Conditions</b> | Submission                                                                                 | Submission Date                                         | Remark                                                |
|----------------------|--------------------------------------------------------------------------------------------|---------------------------------------------------------|-------------------------------------------------------|
|                      |                                                                                            |                                                         |                                                       |
| 1.11                 | Notification of Commencement Date of Construction of Project                               | 31 October 2013                                         | For Road D2                                           |
| 2.3                  | Management Organization of<br>Main Construction Companies                                  | 31 October 2013                                         | For Contract No. KL/2012/03                           |
| 2.4                  | Design Drawing(s) of the Project                                                           | 28 October 2013                                         | For Road D2                                           |
| 2.11                 | Landscape Mitigation Plan(s) for distributors road(s)                                      | 7 January 2014                                          | For Road D2                                           |
| 2.12                 | As-built drawing(s) for the distributor road(s)                                            | To be submitted at least one commencement of operation  |                                                       |
| 3.2                  | Baseline Monitoring Report                                                                 | 26 November 2010 (Part I)<br>24 December 2010 (Part II) | /                                                     |
| 3.3                  | Four hard copies and one electronic copy of the Monthly EM&A Report No. 37 (December 2016) | 19 January 2017                                         | Monthly EM&A<br>Report for Contract<br>No. KL/2012/03 |

Table 1.5 Summary Table for Required Submission under EP No. EP-344/2009

| <b>EP Conditions</b> | Submission                                                                                | Submission Date                                                                              | Remark                                                |
|----------------------|-------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|-------------------------------------------------------|
|                      |                                                                                           |                                                                                              |                                                       |
| 1.11                 | Notification of Commencement<br>Date of Construction of Project                           | 31 October 2013                                                                              | For Pumping<br>Station PS2 and PS<br>NPS              |
| 2.3                  | Management Organization of<br>Main Construction Companies                                 | 31 October 2013                                                                              | For Contract No. KL/2012/03                           |
| 2.4                  | Design Drawing(s) of the Project                                                          | 28 October 2013                                                                              | For Pumping<br>Station PS2 and PS<br>NPS              |
| 2.11                 | Landscape Mitigation Plan(s) for sewage pumping station(s)                                | 7 January 2014                                                                               | For Pumping<br>Station PS2 and PS<br>NPS              |
| 2.12                 | As-built drawing(s) for the sewage pumping station (s)                                    | To be submitted at least one week before the commencement of operation of distributor road(s |                                                       |
| 3.2                  | Baseline Monitoring Report                                                                | 26 November 2010 (Part I)<br>24 December 2010 (Part II)                                      | /                                                     |
| 3.3                  | Four hard copies and one electronic copy of the Monthly EM&A Report No.37 (December 2016) | 19 January 2017                                                                              | Monthly EM&A<br>Report for Contract<br>No. KL/2012/03 |

#### 2. AIR QUALITY

#### **Monitoring Requirements**

2.1 According to EM&A Manual under the EPs, 1-hour and 24-hour Total Suspended Particulates (TSP) monitoring were conducted to monitor the air quality for this Project. For regular impact monitoring, a sampling frequency of at least once in every six days at all of the monitoring stations for 24-hour TSP monitoring. For 1-hour TSP monitoring, the sampling frequency of at least three times in every six days shall be undertaken when the highest dust impact occurs. **Appendix A** shows the established Action/Limit Levels for the environmental monitoring works.

#### **Monitoring Locations**

2.2 Five designated monitoring stations were selected for air quality monitoring programme. Impact dust monitoring was conducted at four of the air quality monitoring stations (AM2, AM3(A), AM4(A) and AM5(A)). **Table 2.1** describes the air quality monitoring locations, which are also depicted in **Figure 2**.

**Table 2.1** Locations for Air Quality Monitoring

| Monitoring Stations | Locations                               | Location of Measurement   |
|---------------------|-----------------------------------------|---------------------------|
| AM2                 | Lee Kau Yan Memorial<br>School          | Rooftop (about 8/F) Area  |
| AM3(A)              | Holy Trinity Bradbury<br>Centre         | Rooftop (about 8/F) Area  |
| AM4(A)*             | EMSD Workshops                          | Rooftop (about 6/F) Area  |
| AM4(B)              | Ma Tau Kok Road (next to EMSD workshop) | N/A                       |
| AM5(A)              | Po Leung Kuk Ngan Po<br>Ling College    | Rooftop (about 10/F) Area |
| #AM6                | PA 15                                   | Site 1B4 (Planned)        |

Remarks: # The impact monitoring at these locations will only be carried out until the sensitive receivers at the building are resided.

#### **Monitoring Equipment**

2.3 **Table 2.2** summarizes the equipment used in the impact air monitoring programme. Copies of calibration certificates and laboratory accreditation are attached in **Appendix B**.

**Table 2.2** Air Quality Monitoring Equipment

| Equipment             | Model and Make                          | Quantity |
|-----------------------|-----------------------------------------|----------|
| Calibrator            | TE-5025A                                | 1        |
| 1-hour TSP Dust Meter | Laser Dust Monitor – Model LD-3, LD-3B/ | 6        |

<sup>\*</sup>Air Quality Monitoring at AM4(A) was cancelled due to unsuccessful accessibility of the facility. 1-hr TSP monitoring was conducted at AM4(B) temporarily.

|                 | Met One Instruments – AEROCET-531        |   |
|-----------------|------------------------------------------|---|
| HVS Sampler     | GMWS 2310 c/w of TSP sampling inlet      | 4 |
| Wind Anemometer | Davis Weather Monitor II, Model no. 7440 | 1 |

#### Monitoring Parameters, Frequency and Duration

2.4 Table 2.3 summarizes the monitoring parameters and frequencies of impact dust monitoring for the whole construction period. The air quality monitoring schedule for the reporting month is shown in **Appendix D**.

 Table 2.3
 Impact Dust Monitoring Parameters, Frequency and Duration

| Parameters | Frequency                         |
|------------|-----------------------------------|
| 1-hr TSP   | At least three times every 6 days |
| 24-hr TSP  | At least once every 6 days        |

### Monitoring Methodology and Quality Assurance and Quality Control (QA/QC) Procedure

1-hour TSP Monitoring

#### Measuring Procedures

- 2.5 The measuring procedures of the 1-hour dust meters were in accordance with the Manufacturer's Instruction Manual as follows:
  - The 1-hour dust meter is placed at least 1.3 meters above ground.
  - Set POWER to "ON" and make sure that the battery level was not flash or in low level.
  - Allow the instrument to stand for about 3 minutes and then the cap of the air sampling inlet has been released.
  - Push the knob at MEASURE position.
  - Set time/mode setting to [BG] by pushing the time setting switch. Then, start the background measurement by pushing the start/stop switch once. It will take 6 sec. to complete the background measurement.
  - Push the time setting switch to change the time setting display to [MANUAL] at the bottom left of the liquid crystal display. Finally, push the start/stop switch to stop the measuring after 1 hour sampling.
  - Information such as sampling date, time, count value and site condition were recorded during the monitoring period.

#### Maintenance/Calibration

- 2.6 The following maintenance/calibration was required for the direct dust meters:
  - Check and calibrate the meter by High-Volume Sampler (HVS) to check the validity and accuracy of the results measured by direct reading method at 2-month intervals throughout all stages of the air quality monitoring.

#### 24-hour TSP Monitoring

#### **Instrumentation**

2.7 High volume samplers (HVS) (Model GMWS-2310 Accu-Vol) completed with appropriate sampling inlets were employed for 24-hour TSP monitoring. The sampler was composed of a motor, a filter holder, a flow controller and a sampling inlet and its performance specification complied with that required by USEPA Standard Title 40, Code of Federation Regulations Chapter 1 (Part 50). Moreover, the HVS also met all the requirements in section 2.5 of the updated EM&A Manual.

#### Operating/Analytical Procedures

- 2.8 Operating/analytical procedures for the operation of HVS were as follows:
  - A horizontal platform was provided with appropriate support to secure the samplers against gusty wind.
  - No two samplers were placed less than 2 meters apart.
  - The distance between the sampler and an obstacle, such as buildings, was at least twice the height that the obstacle protrudes above the sampler.
  - A minimum of 2 meters of separation from walls, parapets and penthouses was required for rooftop samples.
  - A minimum of 2 meters separation from any supporting structure, measured horizontally was required.
  - No furnaces or incineration flues were nearby.
  - Airflow around the sampler was unrestricted.
  - The sampler was more than 20 meters from the drip line.
  - Any wire fence and gate, to protect the sampler, should not cause any obstruction during monitoring.
- 2.9 Prior to the commencement of the 24-hour TSP sampling, the flow rate of the high volume sampler was properly set (between 1.1 m³/min. and 1.4 m³/min.) in accordance with the manufacturer's instruction to within the range recommended in USEPA Standard Title 40, CFR Part 50.
- 2.10 For 24-hour TSP sampling, fiberglass filters having a collection efficiency of  $\geq 99\%$  for particles of 0.3µm (DOP) diameter were used.
- 2.11 The power supply was checked to ensure the sampler worked properly. On sampling, the sampler was operated for 5 minutes to establish thermal equilibrium before placing any filter media at the designated air monitoring station.
- 2.12 The filter holding frame was then removed by loosening the four nuts and a weighted and conditioned filter was carefully centered with the stamped number upwards, on a supporting screen.
- 2.13 The filter was aligned on the screen so that the gasket formed an airtight seal on the outer edges of the filter. Then the filter holding frame was tightened to the filter holder with swing bolts. The applied pressure should be sufficient to avoid air leakage at the edges.

- 2.15 The timer was then programmed so that the TSP will be sampled for 24 hours. Information was recorded on the record sheet, which included the starting time, the weather condition and the filter number (the initial weight of the filter paper can be found out by using the filter number).
- 2.16 After completion of sampling, the filter was removed and sent to Wellab Ltd., which is accredited under HOKLAS for laboratory analysis. The elapsed time was also recorded.
- 2.17 Before weighing, all filters were equilibrated in a conditioning environment for 24 hours. The conditioning temperature should be between 25°C and 30°C and not vary by more than  $\pm 3$ °C; the relative humidity (RH) should be < 50% and not vary by more than  $\pm 5$ %. A convenient working RH is 40%.

#### Maintenance/Calibration

- 2.18 The following maintenance/calibration was required for the HVS:
  - The high volume motors and their accessories were properly maintained. Appropriate
    maintenance such as routine motor brushes replacement and electrical wiring checking
    were made to ensure that the equipment and necessary power supply are in good
    working condition.
  - High volume samplers were calibrated at bi-monthly intervals using G25A Calibration Kit throughout all stages of the air quality monitoring.
  - Orifice Transfer Standards were calibrated at yearly intervals throughout all stages of the air quality monitoring.

#### Results, Observations and Action/Limit Level Exceedance

- 2.19 1-hour TSP monitoring at AM4(A) EMSD Workshop was cancelled due to unsuccessful accessibility to the facility. 1-hr TSP monitoring was conducted at AM4(B) Ma Tau Kok Road (next to EMSD workshop) temporarily.
- 2.20 All other 1-hour TSP monitoring was conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded.
- 2.21 24-hour TSP monitoring at AM4(A) EMSD Workshop was cancelled due to unsuccessful accessibility to the facility. 24-hr TSP monitoring will be resumed after an alternative location is confirmed.
- 2.22 All other 24-hour TSP monitoring was conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded.
- 2.23 The air temperature, precipitation and the relative humidity data were obtained from Hong Kong Observatory where the wind speed and wind direction were recorded by the installed Wind Anemometer set at rooftop (about 8/F) Lee Kau Yan Memorial School. The location is shown in **Figure 4**. This weather information for the reporting month is summarized in **Appendix C.**
- 2.24 The monitoring data and graphical presentations of 1-hour and 24-hour TSP monitoring results are shown in **Appendices E and F** respectively.

- 2.25 The summary of exceedance record in the reporting month is shown in Appendix H. No exceedance in Action/Limit Levels of 1-hour and 24-hour TSP was recorded for the air quality monitoring.
- According to our field observations, the major dust source identified at the designated air 2.26 quality monitoring stations is as follows:

**Table 2.4** Major dust source identified at the designated air quality monitoring stations

| Station                           | Major Dust Source                           |
|-----------------------------------|---------------------------------------------|
| AM2 – Lee Kau Yan Memorial School | Road Traffic Dust                           |
|                                   | Exposed site area and open stockpiles       |
|                                   | Site vehicle movement                       |
| AM3(A) – Holy Trinity Bradbury    | Road Traffic Dust                           |
| Centre                            | Exposed site area                           |
|                                   | Excavation works                            |
|                                   | Site vehicle movement                       |
| AM4(A) – EMSD Workshops           | Site vehicle movement                       |
| AM4(B) – Ma Tau Kok Road (next to | Site vehicle movement                       |
| EMSD workshop) temporarily        |                                             |
| AM5(A) – Po Leung Kuk Ngan Po     | Road Traffic Dust                           |
| Ling College                      | Excavation works at the site (Contract No.: |
|                                   | 1/WSD/14(K)) facing Po Leung Kuk Ngan Po    |
|                                   | Ling College                                |

#### 3. NOISE

#### **Monitoring Requirements**

3.1 According to EM&A Manuals under the EP, construction noise monitoring was conducted to monitor the construction noise arising from the construction activities within KTD. The regular monitoring frequency for each monitoring station shall be on a weekly basis to conduct one set of measurements between 0700 and 1900 hours on normal weekdays.

Appendix A shows the established Action and Limit Levels for the environmental monitoring works.

#### **Monitoring Locations**

- 3.2 Five designated monitoring stations were selected for noise monitoring programme. Noise monitoring was conducted at four designated monitoring stations (M6, M7, M8 and M9). **Figure 3** shows the locations of these stations.
- 3.3 Construction noise monitoring at Station M6 Holy Carpenter Primary School was rejected by the premise owner on 6<sup>th</sup> October 2014. The monitoring station has been relocated at a proposed alternative noise monitoring station M6(A) Oblate Primary School since 10<sup>th</sup> October 2014 to carry out the monitoring works.

**Table 3.1 Noise Monitoring Stations** 

| Monitoring Stations | Locations                         | Location of Measurement       |
|---------------------|-----------------------------------|-------------------------------|
| *M6(A)              | Oblate Primary School             | Rooftop (about 7/F) Area      |
| M7                  | CCC Kei To Secondary School       | Rooftop (about 8/F) Area      |
| M8                  | Po Leung Kuk Ngan Po Ling College |                               |
| M9                  | Tak Long Estate                   | Car Park Building (about 2/F) |
| #M10                | Site 1B4 (Planned)                | -                             |

#### Remarks:

#### **Monitoring Equipment**

**Table 3.2** summarizes the noise monitoring equipment. Copies of calibration certificates are provided in **Appendix B**.

**Table 3.2** Noise Monitoring Equipment

| Equipment                     | Model and Make | Qty. |
|-------------------------------|----------------|------|
| Integrating Sound Level Meter | SVAN 955, 957  | 6    |
| Calibrator                    | SVAN 30A       | 3    |
| Candiator                     | B&K4231        | 2    |

#### **Monitoring Parameters, Frequency and Duration**

3.5 Table 3.3 summarizes the monitoring parameters, frequency and total duration of monitoring. The noise monitoring schedule is shown in **Appendix D**.

 <sup>\*</sup> Alternative noise monitoring station for M6 – Holy Carpenter Primary School from 10<sup>th</sup> October 2014 onwards

<sup>#</sup> The impact monitoring at these locations will only be carried out until existence of the sensitive receiver at the building.

| Monitoring<br>Stations | Parameter                                                                                             | Period                                    | Frequency        | Type of<br>Measurement |
|------------------------|-------------------------------------------------------------------------------------------------------|-------------------------------------------|------------------|------------------------|
| M7<br>M8<br>M9         | L <sub>10</sub> (30 min.) dB(A)<br>L <sub>90</sub> (30 min.) dB(A)<br>L <sub>eq</sub> (30 min.) dB(A) | 0700-1900<br>hrs on<br>normal<br>weekdays | Once per<br>week | Façade (*)             |
| M6(A)                  | L <sub>10</sub> (30 min.) dB(A)<br>L <sub>90</sub> (30 min.) dB(A)<br>L <sub>eq</sub> (30 min.) dB(A) | 0700-1900<br>hrs on<br>normal<br>weekdays | Once per<br>week | Free Field (*)         |

 Table 3.3
 Noise Monitoring Parameters, Frequency and Duration

#### Monitoring Methodology and QA/QC Procedures

- The Sound Level Meter was set on a tripod at a point 1m from the exterior of the sensitive receivers building façade and be at a position 1.2m above the ground.
- For free field measurement, the meter was positioned away from any nearby reflective surfaces. All records for free field noise levels was adjusted with a correction of +3 dB(A).
- The battery condition was checked to ensure the correct functioning of the meter.
- Parameters such as frequency weighting, the time weighting and the measurement time were set as follows:

frequency weighting
time weighting
time measurement
: A
: Fast
: 30 minutes

- Prior to and after each noise measurement, the meter was calibrated using a Calibrator for 94.0 dB at 1000 Hz. If the difference in the calibration level before and after measurement was more than 1.0 dB, the measurement would be considered invalid and repeat of noise measurement would be required after re-calibration or repair of the equipment.
- The wind speed was frequently checked with the portable wind meter.
- At the end of the monitoring period, the  $L_{eq}$ ,  $L_{90}$  and  $L_{10}$  were recorded. In addition, site conditions and noise sources were recorded on a standard record sheet.
- Noise measurement was paused temporarily during periods of high intrusive noise if possible and observation was recorded when intrusive noise was not avoided.
- Noise monitoring was cancelled in the presence of fog, rain, and wind with a steady speed exceeding 5 m/s, or wind with gusts exceeding 10 m/s.

#### **Maintenance and Calibration**

- 3.6 The microphone head of the sound level meter and calibrator was cleaned with a soft cloth at quarterly intervals.
- 3.7 The sound level meter and calibrator were checked and calibrated at yearly intervals.
- 3.8 Immediately prior to and following each noise measurement the accuracy of the sound level meter shall be checked using an acoustic calibrator generating a known sound pressure level at a known frequency. Measurements may be accepted as valid only if the calibration levels from before and after the noise measurement agree to within 1.0 dB.

<sup>(\*)</sup> Refer to bullet point 1 and 2 in the following section.

#### Results, Observations and Action/Limit Level Exceedance

- 3.9 All construction noise monitoring was conducted as scheduled in the reporting month. No Action and Limit Level exceedance was recorded.
- 3.10 The baseline noise level and the Noise Limit Level at each designated noise monitoring station are presented in **Table 3.4**.
- 3.11 Noise monitoring results and graphical presentations are shown in **Appendix G**.
- 3.12 The major noise source identified at the designated noise monitoring stations is as follows:

Table 3.4 Major noise source identified at the designated noise monitoring stations

| Monitoring<br>Stations | Locations                         | Major Noise Source                                                                                |
|------------------------|-----------------------------------|---------------------------------------------------------------------------------------------------|
| M6(A)                  | Oblate Primary School             | Road and marine traffic Noise                                                                     |
| M7                     | CCC Kei To Secondary School       | Road and marine traffic Noise                                                                     |
| M8                     | Po Leung Kuk Ngan Po Ling College | Excavation works at the site (Contract No.: 1/WSD/14(K)) facing Po Leung Kuk Ngan Po Ling College |
| M9                     | Tak Long Estate                   | Road paving and asphalt paving works                                                              |

Table 3.5 Baseline noise level and noise limit level for monitoring stations

| Monitoring<br>Stations | Baseline Noise Level, dB (A)                 | Noise Limit Level, dB (A)                   |
|------------------------|----------------------------------------------|---------------------------------------------|
| M6(A)                  | 63.9 (at 0700 – 1900 hrs on normal weekdays) |                                             |
| M7                     | 68.7 (at 0700 – 1900 hrs on normal weekdays) | 70* (at 0700 – 1900 hrs on normal weekdays) |
| M8                     | 61.9 (at 0700 – 1900 hrs on normal weekdays) |                                             |
| M9                     | 59.0 (at 0700 – 1900 hrs on normal weekdays) | 75 (at 0700 – 1900 hrs on normal weekdays)  |

<sup>(\*)</sup> Noise Limit Level is 65 dB(A) during school examination periods.

#### 4. COMPARISON OF EM&A RESULTS WITH EIA PREDICTIONS

4.1 According to Section 16.1.6 (vi) of the EM&A Manual, the EM&A data were compared with the EIA predictions as summarized in **Table 4.1** to **4.3** below.

 Table 4.1
 Comparison of 1-hr TSP data with EIA predictions

| Station                                     | Predicted 1-hr TSP conc.     |                           |                                       |             |  |
|---------------------------------------------|------------------------------|---------------------------|---------------------------------------|-------------|--|
|                                             | Scenario1<br>(Mid 2009 to    | Scenario2<br>(Mid 2013 to | Reporting Month (January 2017), µg/m3 |             |  |
|                                             | Mid 2013), Late 2016), μg/m3 |                           | Average                               | Range       |  |
| AM2 – Lee Kau Yan<br>Memorial School        | 290                          | 312                       | 175.8                                 | 89.7-232.2  |  |
| AM3(A) - Holy                               | 217                          | 247                       | 159.3                                 | 95.5-217.2  |  |
| Trinity Bradbury                            |                              | ,                         | 20,10                                 | 76.6 212    |  |
| Centre (Alternative station for Sky Tower)  |                              |                           |                                       |             |  |
| AM4(B) – Ma Tau Kok                         | 246                          | 258                       | 181.0                                 | 149.2-210.2 |  |
| Road (next to EMSD workshops) Temporary     |                              |                           |                                       |             |  |
| AM5(A) – Po Leung                           | 159                          | 221                       | 165.3                                 | 78.7-209.9  |  |
| Kuk Ngan Po Ling                            |                              |                           |                                       |             |  |
| College (Alternative                        |                              |                           |                                       |             |  |
| station for CCC Kei<br>To Secondary School) |                              |                           |                                       |             |  |

Table 4.2 Comparison of 24-hr TSP data with EIA predictions

| Station                                                                                                      | Predicted 24-hr TSP conc.    |                           |                                       |            |  |
|--------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------|---------------------------------------|------------|--|
|                                                                                                              | Scenario1<br>(Mid 2009 to    | Scenario2<br>(Mid 2013 to | Reporting Month (January 2017), µg/m3 |            |  |
|                                                                                                              | Mid 2013), Late 2016), μg/m3 |                           | Average                               | Range      |  |
| AM2 – Lee Kau Yan<br>Memorial School                                                                         | 145                          | 169                       | 80.4                                  | 27.1-129.5 |  |
| AM3(A) - Holy<br>Trinity Bradbury<br>Centre (Alternative<br>station for Sky Tower)                           | 106                          | 138                       | 70.5                                  | 37.0-89.9  |  |
| AM5(A) – Po Leung<br>Kuk Ngan Po Ling<br>College (Alternative<br>station for CCC Kei<br>To Secondary School) | 103                          | 128                       | 35.2                                  | 18.4-47.9  |  |

 Table 4.3
 Comparison of Noise Monitoring Data with EIA predictions

| Stations                                  | Predicted Mitigated Construction Noise Levels during Normal Working Hour (Leq (30min) dB(A)) | Reporting Month (January 2017), Leq (30min) dB(A) |  |
|-------------------------------------------|----------------------------------------------------------------------------------------------|---------------------------------------------------|--|
| M6(A) - Oblate Primary<br>School ^        | N/A                                                                                          | 57.4 – 66.2                                       |  |
| M7 - CCC Kei To<br>Secondary School       | 45 – 68                                                                                      | 62.7 – 68.6                                       |  |
| M8 - Po Leung Kuk Ngan<br>Po Ling College | 44 – 70                                                                                      | 52.8 – 64.2                                       |  |
| M9 – Tak Long Estate                      | Not predicted in EIA Report                                                                  | 58.6 – 62.7                                       |  |

<sup>(^)</sup> Alternative noise monitoring station for M6 – Holy Carpenter Primary School from 10<sup>th</sup> October 2014 onwards.

- 4.2 The averages of 1-hour TSP concentrations in all stations in the reporting month were below the prediction in the approved Environmental Impact Assessment (EIA) Report.
- 4.3 The averages of 24-hour TSP concentrations in all stations in the reporting month were below the prediction in the approved Environmental Impact Assessment (EIA) Report.
- 4.4 The noise monitoring results in the reporting month at M7 was higher than predicted mitigated construction noise levels in the EIA report due to the traffic noise.

#### 5. LANDSCAPE AND VISUAL

#### **Monitoring Requirements**

5.1 According to EM&A Manual of the Kai Tak Development EIA Study, ET shall monitor and audit the contractor's activities during the construction period on a weekly basis, and to report on the contractor's performance.

#### **Results and Observations**

- 5.2 Site audits were carried out on a weekly basis to monitor and audit the timely implementation of landscape and visual mitigation measures within the site boundaries of this Project. The summaries of site audits are attached in **Appendix I**.
- 5.3 No non-compliance of the landscape and visual impact was recorded in the reporting month.
- 5.4 In accordance with the Action Plan presented in **Appendix J**, no corrective actions were required in the reporting month.

#### 6. ENVIRONMENTAL AUDIT

#### **Site Audits**

- 6.1 Site audits were carried out on a weekly basis to monitor the timely implementation of proper environmental management practices and mitigation measures in the Project site. The summaries of site audits are attached in **Appendix I**.
- 6.2 Site audits were conducted on 6<sup>th</sup>, 13<sup>th</sup>, 18<sup>th</sup> and 26<sup>th</sup> January 2017 in the reporting month. IEC site inspection was conducted on 18<sup>th</sup> January 2017. No non-compliance was observed during the site audits.

#### Status of Environmental Licensing and Permitting

6.3 All permits/licenses obtained for the Project are summarized in Table 6.1.

 Table 6.1
 Summary of Environmental Licensing and Permit Status

| D                           | Valid Period |          | D.4.T.                                                                                                                                                                                                                                                        | G      |
|-----------------------------|--------------|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| Permit No.                  | From         | To       | Details                                                                                                                                                                                                                                                       | Status |
| <b>Environmental Perm</b>   | it (EP)      |          |                                                                                                                                                                                                                                                               |        |
| EP-337/2009                 | 23/04/09     | N/A      | Construction of new distributor roads serving the planned Kai Tak development.                                                                                                                                                                                | Valid  |
| EP-344/2009                 | 23/04/09     | N/A      | Construction of a new sewage pumping station serving the planned Kai Tak development with installed capacity of more than 2,000 m³ per day and a boundary of which is less than 150m from an existing or planned residential area or educational institution. | Valid  |
| Effluent Discharge Li       | icense       |          |                                                                                                                                                                                                                                                               |        |
| WT00020971-2015             | 22/04/15     | 21/04/20 | Discharge Licence for the discharge of wastewater from the construction site including contaminated surface run-off to the communal storm water drain                                                                                                         | Valid  |
| <b>Registration of Chem</b> | ical Waste P | Producer |                                                                                                                                                                                                                                                               |        |
| 5213-286-K2958-05           |              |          | Registration of chemical waste producer for chemical waste produced during construction of Stage 4 at former North Apron Area Infrastructure.                                                                                                                 | Valid  |
| <b>Construction Noise P</b> | ermit        |          |                                                                                                                                                                                                                                                               | -      |
| GW-RE0964-16                | 30/09/16     | 29/03/17 | Location: Heading 7A & 7B                                                                                                                                                                                                                                     | Valid  |

#### **Status of Waste Management**

- 6.4 The amount of wastes generated by the major site activities of this Project during the reporting month is shown in **Appendix M**.
- 6.5 In respect of the dump truck cover, the Contractor is advised to take record photos and inspection to ensure that the skips of all dump trucks have been fully covered before leaving the site.

#### **Implementation Status of Environmental Mitigation Measures**

6.6 During site inspections in the reporting month, no non-conformance was identified. ET weekly site inspections were carried out during the reporting month and the observations and recommendations are summarized in Table 6.2.

**Table 6.2** Observations and Recommendations of Site Inspections for EP-337/2009

| Parameters                   | Date            | Observations and Recommendations                                  | Follow-up                         |  |  |
|------------------------------|-----------------|-------------------------------------------------------------------|-----------------------------------|--|--|
| Water Quality                |                 |                                                                   |                                   |  |  |
| Air Quality                  |                 |                                                                   |                                   |  |  |
| Noise                        |                 |                                                                   |                                   |  |  |
| Waste/Chemical<br>Management | 13 January 2017 | Observation: Drip tray should be provided to chemical containers. | Chemical containers were removed. |  |  |
| Landscape and<br>Visual      |                 | <b></b>                                                           |                                   |  |  |
| Permits /Licences            |                 |                                                                   |                                   |  |  |

| Table 0.5 Observations and Recommendations of Site Inspections for EP-544/200 | <b>Table 6.3</b> | Observations and Recommendations of Site Inspections for EP-344/2009 |
|-------------------------------------------------------------------------------|------------------|----------------------------------------------------------------------|
|-------------------------------------------------------------------------------|------------------|----------------------------------------------------------------------|

| Parameters                   | Date            | Observations and Recommendations                                       | Follow-up              |
|------------------------------|-----------------|------------------------------------------------------------------------|------------------------|
| Water Quality                |                 |                                                                        |                        |
| Air Quality                  |                 |                                                                        |                        |
| Noise                        |                 |                                                                        |                        |
| Waste/Chemical<br>Management | 26 January 2017 | Observation: Oil stain should be removed as chemical waste. (near PS2) | Oil stain was cleared. |
| Landscape and<br>Visual      |                 | 1-                                                                     |                        |
| Permits /Licences            |                 |                                                                        |                        |

#### **Summary of Mitigation Measures Implemented**

6.7 The monthly IEC audit was carried out on 18<sup>th</sup> January 2017, the observations were recorded and they are presented as follows:

#### Follow up of last monthly audit:

• Nil

#### Observation(s) in the reporting month:

- No adverse environmental impacts or deficiencies of the environmental mitigation measures were observed. No corrected actions were therefore required.
- 6.8 An updated summary of the EMIS is provided in **Appendix K**.

#### **Implementation Status of Event Action Plans**

6.9 The Event Action Plans for air quality, noise and landscape and visual are presented in **Appendix J**.

#### 1-hr TSP Monitoring

6.10 No Action/Limit Level exceedance was recorded in the reporting month.

#### 24-hr TSP Monitoring

6.11 No Action/Limit Level exceedance was recorded in the reporting month.

#### Construction Noise

6.12 No Action/Limit Level exceedance was recorded in the reporting month.

#### Landscape and visual

6.13 No non-compliance was recorded in the reporting month.

## Summary of Complaint, Warning, Notification of any Summons and Successful Prosecution

6.14 No environmental complaints and environmental prosecution were received in the reporting month. The summaries of environmental complaint, warning, summon and notification of successful prosecution for the Project are presented in **Appendix L**.

#### 7. **FUTURE KEY ISSUES**

- 7.1 Major site activities undertaken for the coming two months include:
  - Daily Cleaning;
  - Installation of hand-railing & ladder inside Box Culvert B5;
  - Construction of staircase and landing and E&M Works at PS2;
  - Water test, backfill and sheet-pile removal in Heading 7A;
  - Segment tunneling, backfill and sheet-pile removed chamber construction in Heading 7B;
  - Outfall construction at Box Culvert B6;
  - Road widening works (excavation and UU works) at Sung Wong Toi Road;
  - Maintenance & Servicing Engineer's Office at Portion 9;
  - Lay HDPE pipe at Pit 1 and 9;
  - Pipe jacking at Pit 4;
  - Chamber construction at Pit 5;
  - Installation of drainage, UU laying works and Road works at Road D2;
  - Finishing works and E&M works at NPS;
  - UU works and Road works at Road L19 & Bailey St; and
  - Storage of excavated material at Portion 6.
- 7.2 The tentative construction program for the Project is provided in **Appendix N.**

#### **Key Issues for the Coming Month**

- 7.3 Key environmental issues in the coming month include:
  - Dust generation from stockpiles of dusty materials, exposed site area, excavation works and rock breaking activities;
  - Water spraying for dust generating activity and on haul road;
  - Proper storage of construction materials on site;
  - Storage of chemicals/fuel and chemical waste/waste oil on site;
  - Accumulation of general and construction waste on site;
  - Noise from operation of the equipment, especially for rock-breaking activities, piling works and machinery on-site; and
  - Review and implementation of temporary drainage system for the surface runoff.
- 7.4 The tentative program of major site activities and the impact prediction and environmental mitigation measures for the coming two months, i.e. February and March 2017 are summarized as follows:

Table 7.1 Summary of the tentative program of major site activities, the impact prediction and control measures for February and March 2017

| <b>Construction Works</b>   | Major Impact<br>Prediction                                        | Control Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-----------------------------|-------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| As mentioned in Section 7.1 | Air quality impact (dust)  Water quality impact (surface run-off) | <ul> <li>a) Frequent watering of haul road and unpaved/exposed areas;</li> <li>b) Frequent watering or covering stockpiles with tarpaulin or similar means; and</li> <li>c) Watering of any earth moving activities.</li> <li>d) Diversion of the collected effluent to de-silting facilities for treatment prior to discharge to public storm water drains;</li> <li>e) Provision of adequate de-silting facilities for treating surface run-off and other collected effluents prior to discharge;</li> <li>f) Provision of site boundary bund such as sealing of hoarding footings to avoid run-off from entering the existing storm water drainage system via public road; and</li> <li>g) Provision of measures to prevent discharge into the stream.</li> </ul> |
|                             | Noise Impact                                                      | <ul> <li>h) Scheduling of noisy construction activities if necessary to avoid persistent noisy operation;</li> <li>i) Controlling the number of plants use on site;</li> <li>j) Regular maintenance of machines; and</li> <li>k) Use of acoustic barriers if necessary.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

#### **Monitoring Schedule for the Next Month**

7.5 The tentative environmental monitoring schedules for the next month are shown in **Appendix D**.

#### CONCLUSIONS AND RECOMMENDATIONS

#### Conclusions

8.

8.1 Environmental monitoring works required under the EM&A Manual were performed in the reporting month and all monitoring results were checked and reviewed.

#### 1-hr TSP Monitoring

- 8.2 1-hour TSP monitoring at AM4(A) EMSD Workshop was cancelled due to unsuccessful accessibility to the facility. 1-hr TSP monitoring was conducted at AM4(B) Ma Tau Kok Road (next to EMSD workshop) temporarily.
- 8.3 All other 1-hour TSP monitoring was conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded. 1-hour TSP concentrations in all stations in the reporting month were below the prediction in the approved Environmental Impact Assessment (EIA) Report.

#### 24-hr TSP Monitoring

- 8.4 24-hour TSP monitoring at AM4(A) EMSD Workshop was cancelled due to unsuccessful accessibility to the facility. 24-hr TSP monitoring will be resumed after an alternative location is confirmed.
- 8.5 All other 24-hour TSP monitoring was conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded. 4-hour TSP concentrations in all stations in the reporting month were below the prediction in the approved Environmental Impact Assessment (EIA) Report.

#### **Construction Noise Monitoring**

8.6 All construction noise monitoring was conducted as scheduled in the reporting month. No Action and Limit Level exceedance was recorded. The construction noise levels in all stations in the reporting month were within the range of predicted mitigated construction noise levels in the approved Environmental Impact Assessment (EIA) report.

#### Complaints, Notification of any Summons and Prosecution Received

8.7 No environmental complaints and environmental prosecution were received in the reporting month. The summaries of environmental complaint, warning, summon and notification of successful prosecution for the Project are presented in **Appendix L**.

#### Recommendations

8.8 According to the environmental audit performed in the reporting month, the following recommendations were made:

#### Air Quality Impact

- To implement dust suppression measures on all haul roads, stockpiles, dry surfaces and excavation works.
- To mitigate the dust generation by adequate water spraying in dry days.

#### Noise Impact

- To inspect the noise sources inside the site.
- To disperse the locations of noisy equipments and position the equipments as far away as possible from sensitive receivers.
- To provide temporary noise barriers for operations of noisy equipment near the noise sensitive receivers in an appropriate location.

#### Water Impact

- To prevent any surface runoff discharge into any stream course.
- To review and implement temporary drainage system.
- To identify any wastewater discharges from site.
- To ensure properly maintenance for de-silting facilities.
- To clear the silt and sediment in the sedimentation tanks.
- To review the capacity of de-silting facilities for discharge.
- To divert all the water generated from construction site to de-silting facilities with enough handling capacity before discharge.

#### Waste/Chemical Management

- To check for any accumulation of waste materials or rubbish on site.
- To ensure the performance of sorting of C&D materials at source (during generation);
- To avoid any discharge or accidental spillage of chemical waste or oil directly from the site.
- To provide proper storage area or drip trays for oil containers/ equipment on site.
- To avoid improper handling or storage of oil drum on site.

#### Landscape and Visual

- To protect the existing trees to be retained.
- To transplant the trees unavoidably affected by the works.
- To control of night-time lighting.
- To provide decorative screen hoarding.
- To complete landscape works at site area as early as possible.

#### **Effectiveness of Environmental Management**

- 8.9 The above recommendations and the recommended mitigation measures in the EM&A Manual were carried out by the Contractor during construction. No non-compliance was recorded during the environmental site inspections as shown in **Appendix I**.
- 8.10 The effectiveness of environmental management is satisfactory as the above recommendations are met. Some of the examples of mitigation measures for the following recommendations are given in **Table 8.1** below.
  - Surface runoff discharge into any stream course is prevented;
  - Provision of sedimentation facilities after identification of wastewater discharges from site;
  - Discharge or accidental spillage of chemical waste or oil directly from the site is avoided:
  - Improper handling or storage of oil drum on site is avoided;
  - The existing trees to be retained are protected; and
  - Night-time lighting is controlled.

#### Monthly EM&A Report – August 2016

#### **Table 8.1 Examples of Mitigation Measures for Environmental Recommendations**



To prevent any surface runoff discharge into any stream course.



Follow-up measure(s) after identification of wastewater discharges from site.



To avoid any discharge or accidental spillage of chemical waste or oil directly from the site



To avoid improper handling or storage of oil drum on site





To protect the existing trees to be retained





To control of night-time lighting


#### **FIGURES**

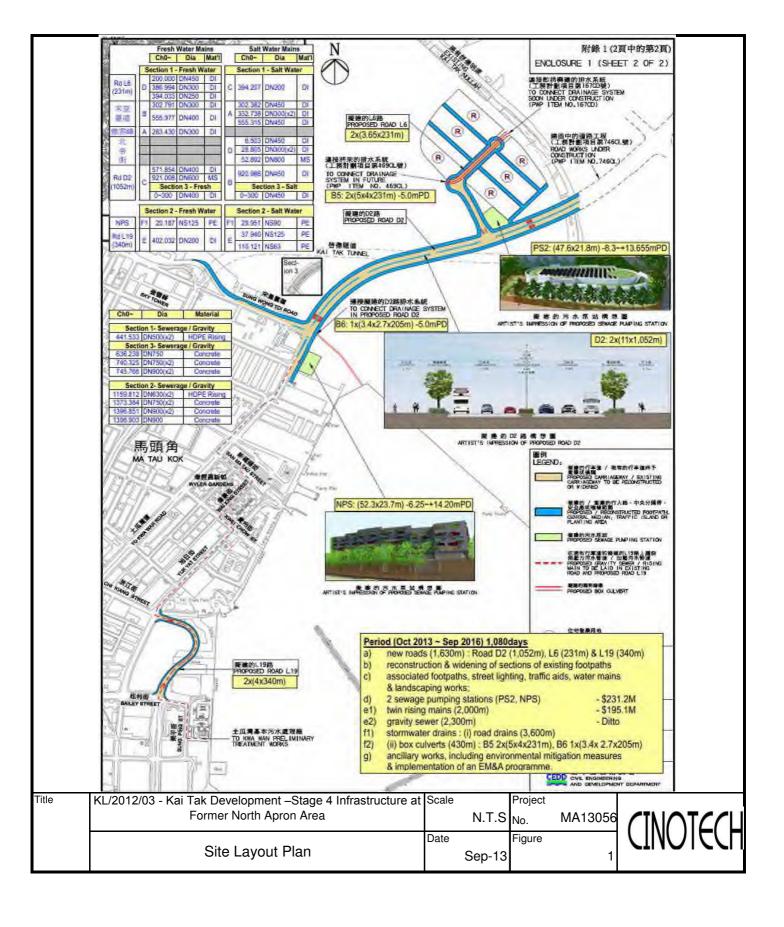

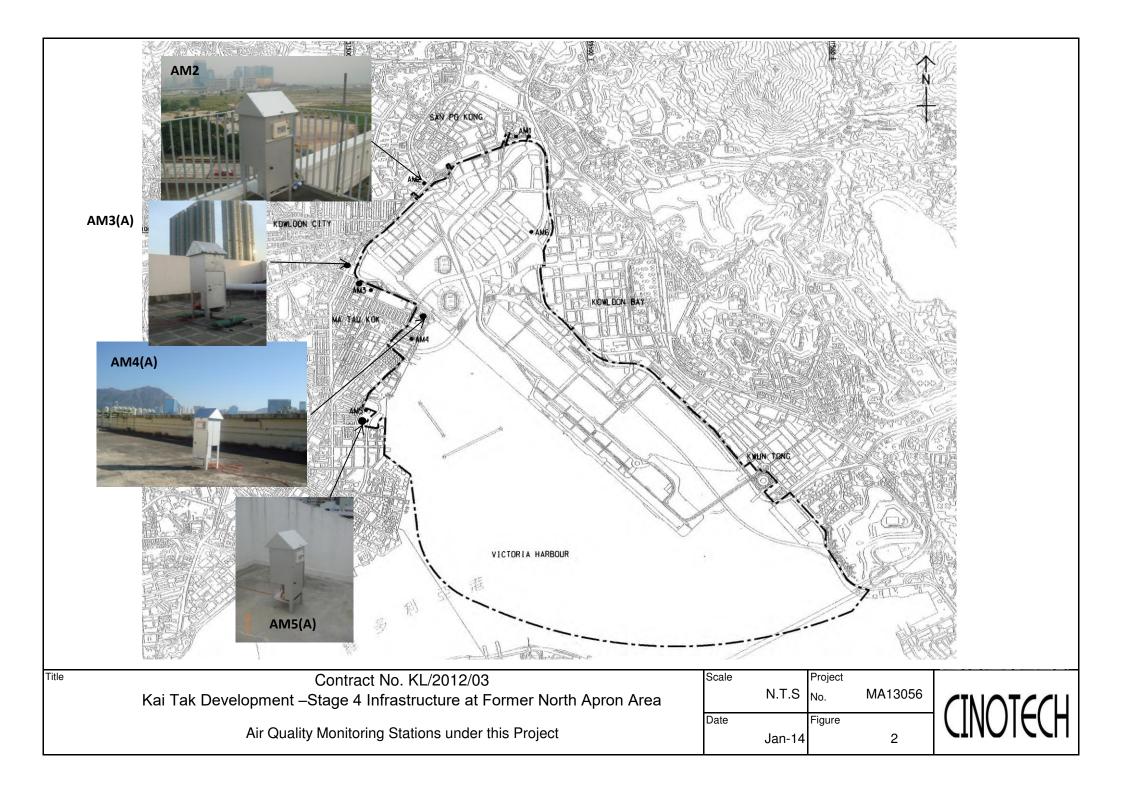

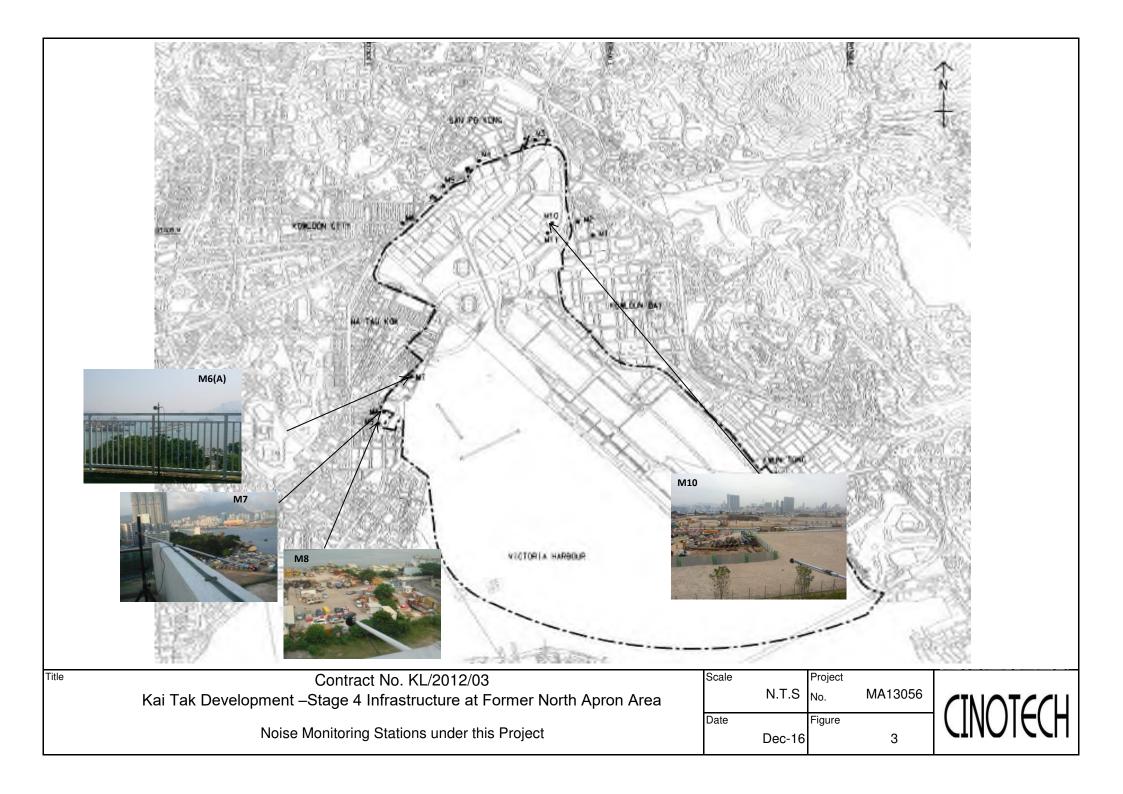

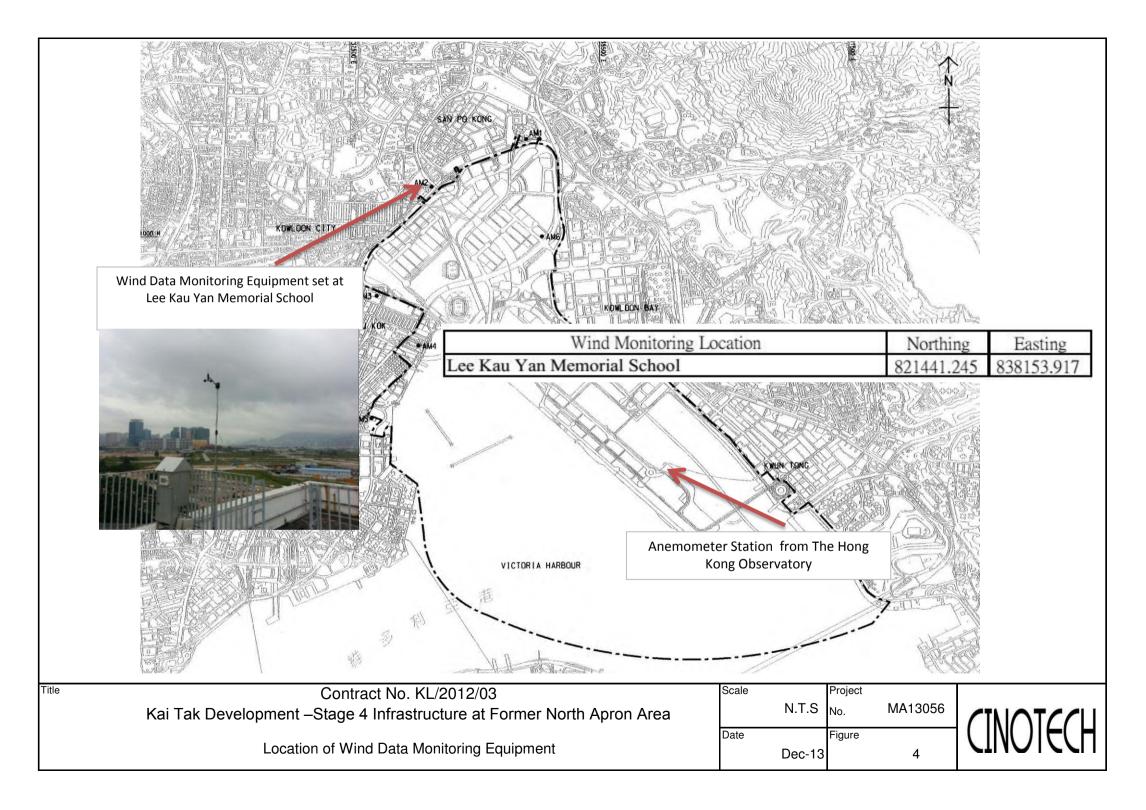

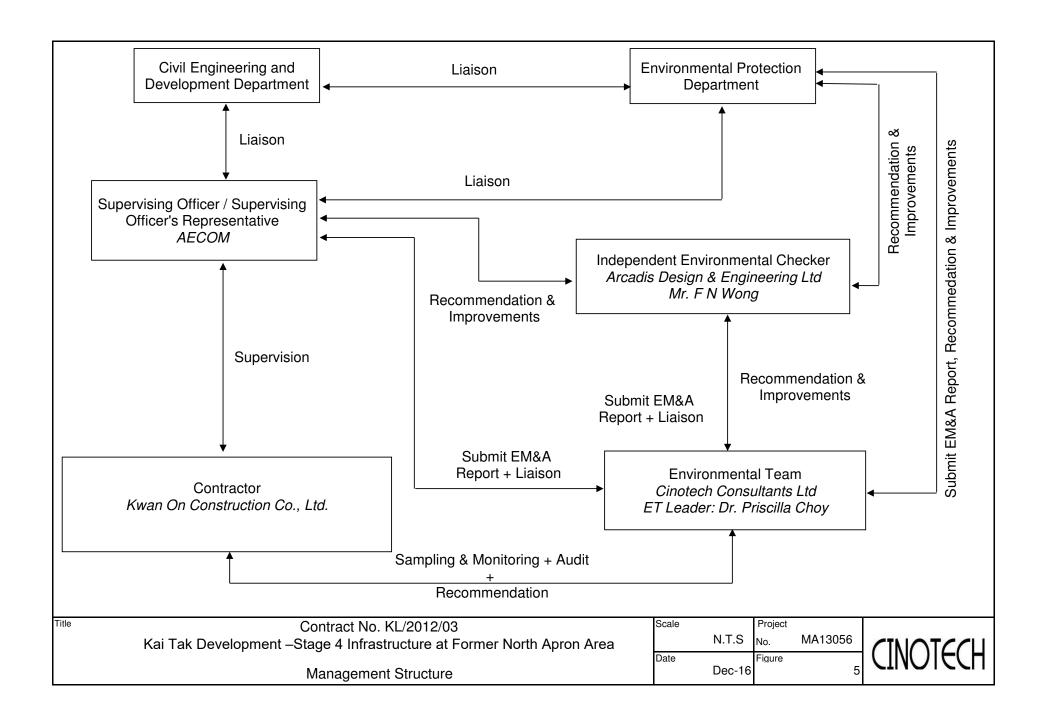

## APPENDIX A ACTION AND LIMIT LEVELS

### Appendix A - Action and Limit Levels

Table A-1 Action and Limit Levels for 1-Hour TSP

| Location | Action Level, μg/m³ | Limit Level, μg/m³ |
|----------|---------------------|--------------------|
| AM2      | 346                 |                    |
| AM3(A)   | 351                 | 500                |
| AM4(A)   | 371                 | 500                |
| AM5(A)   | 345                 |                    |

Table A-2 Action and Limit Levels for 24-Hour TSP

| Location Action Level, µg/m <sup>3</sup> |     | Limit Level, μg/m³ |
|------------------------------------------|-----|--------------------|
| AM2                                      | 157 |                    |
| AM3(A)                                   | 167 | 260                |
| AM4(A)                                   | 187 | 260                |
| AM5(A)                                   | 156 |                    |

**Table A-3** Action and Limit Levels for Construction Noise

| Time Period                      | Action Level                              | Limit Level                  |
|----------------------------------|-------------------------------------------|------------------------------|
| 0700-1900 hrs on normal weekdays | When one documented complaint is received | 75 dB(A)<br>70dB(A)/65dB(A)* |

Remarks: If works are to be carried out during restricted hours, the conditions stipulated in the Construction Noise Permit (CNP) issued by the Noise Control Authority have to be followed. \*70dB(A) and 65dB(A) for schools during normal teaching periods and school examination periods, respectively.

APPENDIX B COPIES OF CALIBRATION CERTIFCATES



|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                              |                                |                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | File No      | MA14008/59/0039                         |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|--------------------------------|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-----------------------------------------|
| Station                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | AM2 - Lee Kau                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Yan Memorial S               | School                         | Operator               | :                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |              |                                         |
| Date:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Date:         21-Nov-16           Equipment No.:         A-01-59                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                              |                                | Next Due Date:         | :20-Jan                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | -17          |                                         |
| Equipment No.:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                              | _                              | Serial No.             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | ļ            |                                         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                              | Ambient                        | Condition              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |              |                                         |
| Temperatu                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | ıre, Ta (K)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 298.6                        | Pressure, Pa                   |                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 762.2        |                                         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | ()                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                              | 1,100,000,10                   | (mmig)                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 702.2        |                                         |
| Andrews Andrew |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | O                            | rifice Transfer Sta            | ndard Inform           | nation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | n 22 a.c.    |                                         |
| Serial                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | l No.:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 2896                         | Slope, mc (CFM)                | 0.0598                 | Intercep                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | t, bc        | -0.05079                                |
| Last Calibr                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | ation Date:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 4-Mar-16                     |                                |                        | $bc = [\Delta H \times (Pa/76)]$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |              |                                         |
| Next Calibr                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | ration Date:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 3-Mar-17                     |                                |                        | x (Pa/760) x (298                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |              |                                         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | •                            |                                |                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |              |                                         |
| 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Constitution of the Consti |                              | Calibration of                 | TSP Sampler            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |              |                                         |
| Calibration                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Or                           | fice                           |                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | HVS          |                                         |
| Point AH (orifice), in. of water                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | [ΔH x (Pa/76                 | 60) x (298/Ta)] <sup>1/2</sup> | Qstd (CFM)<br>X - axis | ΔW (HVS), in. of water                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | [ΔW x (Pa/76 | 0) x (298/Ta)] <sup>1/2</sup> Y<br>axis |
| 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 11.4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 3.38                         |                                | 57.35                  | 7.3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |              | 2.70                                    |
| 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 9.8                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                              | 3.13                           | 53.23                  | 6.4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |              | 2.53                                    |
| 3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 7.6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 2.76                         |                                | 46.98                  | 5.0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |              | 2.24                                    |
| 4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 4.9                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 2,21                         |                                | 37.89                  | 3.1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |              | 1.76                                    |
| 5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 3.3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 1.82                         |                                | 31.25                  | 2.2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |              | 1.48                                    |
| By Linear Regr<br>Slope , mw =<br>Correlation c                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | n q                          | ]<br>9 <b>993</b>              | Intercept, bw          | -0.016                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 58           |                                         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Coefficient < 0.990                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                              |                                |                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |              |                                         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                              | Set Point C                    | alculation             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |              |                                         |
| From the TSP Fi                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | eld Calibration Cu                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | ırve, take Ostd =            |                                | unitiativii            | erseet a section of the analysis state of the analysis of the |              | <u> </u>                                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | sion Equation, the                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                              |                                |                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |              |                                         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Equation, the                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | · 1 varao acco               | raing to                       |                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |              |                                         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | mw x (                       | $Qstd + bw = [\Delta W]$       | x (Pa/760) x (25       | 98/Ta)] <sup>1/2</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |              |                                         |
| Therefore, Se                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | et Point; W=( my                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | v x Qstd + bw ) <sup>2</sup> | <sup>t</sup> x(760/Pa)x(T      | a/298)=                | 4.12                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |              |                                         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                              |                                | •                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |              |                                         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                              |                                |                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |              |                                         |
| Remarks:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                              |                                |                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |              |                                         |
| Comarks,                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                              |                                |                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |              |                                         |
| •                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                              |                                |                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |              |                                         |
| Conducted by:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | wk lang                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Signature:                   | Kwa                            | á )                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Date:        | 21/11/16                                |
| Checked by:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 120                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Signature:                   | /                              | 九                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Date:        | LI November of                          |



|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                |                             |                               |                        |                                                         | File No.  | MA14008/59/0040                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|-----------------------------|-------------------------------|------------------------|---------------------------------------------------------|-----------|---------------------------------------|
| Station AM2 - Lee Kau Yan Memorial Se                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                |                             |                               |                        | WK                                                      |           |                                       |
| Date:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 20-Jan-17                                                      |                             | _                             | Next Due Date:         | 19-Mar                                                  | 19-Mar-17 |                                       |
| Equipment No.:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | A-01-59                                                        |                             | -                             | Serial No.             | 2354                                                    |           |                                       |
| Artestan                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                |                             | Ambient (                     | Condition              |                                                         |           |                                       |
| Temperatui                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | re, Ta (K)                                                     | 287.8 Pressure, I           |                               | (mmHg)                 | 770.6                                                   |           |                                       |
| 5. 3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                |                             |                               |                        |                                                         |           |                                       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                | Ō,                          | rifice Transfer Sta           | ndard Inform           | ation                                                   |           |                                       |
| Serial                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | No.:                                                           | 2896                        | 2896 Slope, mc (CFM)          |                        | Intercept, bc -0.0                                      |           | -0.05079                              |
| Last Calibration Date:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                | 4-Mar-16                    |                               | mc x Qstd + l          | $bc = [\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$ |           | 1/2                                   |
| Next Calibra                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | ition Date:                                                    | 3-Mar-17                    |                               |                        | x (Pa/760) x (298                                       |           |                                       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                |                             |                               |                        |                                                         |           |                                       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                |                             | Calibration of                | TSP Sampler            |                                                         |           |                                       |
| Calibration                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                | Or                          | fice                          |                        | HVS                                                     |           |                                       |
| Point                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | ΔH (orifice), in. of water                                     |                             | 0) x (298/Ta)] <sup>1/2</sup> | Qstd (CFM)<br>X - axis | ΔW (HVS), in.<br>of water                               |           | (0) x (298/Ta)] <sup>1/2</sup> Y-axis |
| 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 11.7                                                           | 3.50                        |                               | 59.47                  | 7.6                                                     |           | 2.82                                  |
| 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 9.8                                                            | 3.21                        |                               | 54.50                  | 6.5                                                     |           | 2.61                                  |
| 3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 7.5                                                            | 2.81                        |                               | 47.78                  | 5.1                                                     |           | 2.31                                  |
| 4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 5.0                                                            | 2.29                        |                               | 39.17                  | 3.2                                                     |           | 1.83                                  |
| 5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 3.4                                                            | 1.89                        |                               | 32.45                  | 2.3                                                     |           | 1.55                                  |
| By Linear Regree Slope, mw = Correlation co                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 0.0480<br>pefficient* =                                        | 0.9                         | 988                           | Intercept, bw          | -0.014                                                  | 7         |                                       |
| *If Correlation C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | oefficient < 0.99                                              | 0, check and rec            |                               |                        | State ( to be more from the corp of the first or one of |           |                                       |
| i sul competition participation of the competition | ego ( a como transcriptor o como como como como como como como |                             | Set Point C                   | alculation             | 800000000000000000000000000000000000000                 |           |                                       |
| From the TSP Fig                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                |                             |                               |                        |                                                         |           |                                       |
| From the Regress                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | sion Equation, th                                              | e "Y" value acco            | rding to                      |                        |                                                         |           |                                       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                | mw x (                      | $Qstd + bw = [\Delta W]$      | x (Pa/760) x (2        | 98/Ta)] <sup>1/2</sup>                                  |           |                                       |
| Therefore, Se                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | et Point; W = ( m                                              | w x Qstd + bw) <sup>2</sup> | x (760/Pa)x(T                 | Ca / 298 ) =           | 4.01                                                    |           |                                       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                |                             |                               |                        |                                                         |           |                                       |
| Remarks:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                |                             |                               |                        |                                                         |           |                                       |
| -                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                |                             |                               |                        |                                                         |           |                                       |
| Conducted by: Checked by: _                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | wk Tang<br>12                                                  | Signature:                  | Kwa                           |                        |                                                         | Date:     | 20/1/2017<br>20 January 2017          |

### CINOTECH

File No. MA14008/49/0037 Station AM3(A) - Holy Trinity Bradbury Centre Operator: WK Date: 21-Nov-16 Next Due Date: 20-Jan-17 Equipment No.: A-01-49 Serial No. 1793 **Ambient Condition** Temperature, Ta (K) 297.8 Pressure, Pa (mmHg) 763.5 Orifice Transfer Standard Information 0.0598 Intercept, bc Serial No.: 2896 Slope, mc (CFM) -0.05079 Last Calibration Date: 4-Mar-16 mc x Qstd + bc =  $[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$ Qstd =  $\{ [\Delta H \times (Pa/760) \times (298/Ta)]^{1/2} -bc \} / mc$ Next Calibration Date: 3-Mar-17 Calibration of TSP Sampler Orfice HVS Calibration  $\Delta H$  (orifice),  $[\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$ Qstd (CFM) ΔW (HVS), in. Point  $[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$ in, of water X - axis of water Y-axis 1 11.6 3.41 57.96 7.6 2.76 2 9.4 3.07 52.26 6.2 2.50 3 7.6 2.76 47.08 5.2 2.29 4 5.2 2.29 39.09 3.4 1.85 5 3.4 1.85 31.77 2.3 1.52 By Linear Regression of Y on X Slope, mw = 0.0479Intercept, bw: -0.0045 Correlation coefficient\* = \*If Correlation Coefficient < 0.990, check and recalibrate. Set Point Calculation From the TSP Field Calibration Curve, take Qstd = 43 CFM From the Regression Equation, the "Y" value according to mw x Qstd + bw =  $[\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$ Therefore, Set Point;  $W = (mw \times Qstd + bw)^2 \times (760 / Pa) \times (Ta / 298) =$ Remarks: Date: Date:



File No. MA14008/49/0038

| Station                                         | AM3(A) - Holy                          | Trinity Bradbu           | ry Centre Operator:                                                                                                                            |                        | WK                     |            |                                               |  |
|-------------------------------------------------|----------------------------------------|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|------------------------|------------|-----------------------------------------------|--|
| Date:                                           | 20-Jan-17                              |                          |                                                                                                                                                | Next Due Date:         |                        | 19-Mar-17  |                                               |  |
| Equipment No.:                                  | Equipment No.: A-01-49                 |                          | _ Serial No.                                                                                                                                   |                        | 1793                   |            |                                               |  |
|                                                 |                                        |                          |                                                                                                                                                |                        |                        |            |                                               |  |
|                                                 |                                        |                          | Ambient C                                                                                                                                      |                        |                        |            |                                               |  |
| Temperature, Ta (K)                             |                                        | 288.4                    | 288.4 Pressure, Pa (mmHg)                                                                                                                      |                        |                        | 771.5      |                                               |  |
|                                                 |                                        |                          |                                                                                                                                                |                        |                        |            |                                               |  |
| Serial                                          | No ·                                   | 2896                     | rifice Transfer Sta<br>Slope, mc (CFM)                                                                                                         | I                      | Intercept              | t he       | -0.05079                                      |  |
| Serial No.:  Last Calibration Date:             |                                        | 4-Mar-16                 | <del></del>                                                                                                                                    |                        | ·                      |            | ·                                             |  |
| Next Calibration Date:                          |                                        | 3-Mar-17                 | mc x Qstd + bc = $[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$<br>Qstd = $\{[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2} - bc\} / mc$ |                        |                        |            |                                               |  |
| TOAL CARD                                       | ation Date.                            | J-14141-17               | 1                                                                                                                                              | Zera (Imr.             | (1 u/ 700) II (2)0/    | - weg 7    |                                               |  |
|                                                 |                                        |                          | Calibration of                                                                                                                                 | TSP Sampler            |                        |            |                                               |  |
| C-10                                            |                                        | O                        | rfice                                                                                                                                          |                        | HVS                    |            |                                               |  |
| Calibration<br>Point                            | ΔH (orifice),<br>in. of water          | [ΔH x (Pa/7              | (60) x (298/Ta)] <sup>1/2</sup>                                                                                                                | Qstd (CFM)<br>X - axis | ΔW (HVS), in. of water | [ΔW x (Pa/ | 760) x (298/Ta)] <sup>1/2</sup> <b>Y-axis</b> |  |
| 1                                               | 11.8                                   |                          | 3.52                                                                                                                                           |                        | 7.8                    | 2.86       |                                               |  |
| 2                                               | 9.7                                    | 3.19                     |                                                                                                                                                | 54.20                  | 6.5                    |            | 2.61                                          |  |
| 3                                               | 7.5                                    | 2.80                     |                                                                                                                                                | 47.76                  | 5.1                    |            | 2.31                                          |  |
| 4                                               | 5.1                                    | 2.31                     |                                                                                                                                                | 39.53                  | 3.4                    |            | 1.89                                          |  |
| 5                                               | 3.4                                    | 1.89                     |                                                                                                                                                | 32,43                  | 2.1                    |            | 1.48                                          |  |
| By Linear Regr<br>Slope , mw =<br>Correlation c | ression of Y on X 0.0504 oefficient* = |                          | . <b>9989</b>                                                                                                                                  | Intercept, bw =        | -0.121                 | 6          |                                               |  |
| *If Correlation (                               | Coefficient < 0.99                     | 0, check and re          | ecalibrate.                                                                                                                                    |                        |                        |            |                                               |  |
|                                                 |                                        |                          | Set Point C                                                                                                                                    | lculation              |                        |            |                                               |  |
| From the TSP Fi                                 | ield Calibration C                     | urve, take Qste          | d = 43 CFM                                                                                                                                     |                        |                        |            |                                               |  |
| From the Regres                                 | sion Equation, the                     | e "Y" value ac           | cording to                                                                                                                                     |                        |                        |            |                                               |  |
|                                                 |                                        | mw x (                   | Qstd + bw = [ΔW x                                                                                                                              | (Pa/760) x (29         | 98/Ta)] <sup>1/2</sup> |            |                                               |  |
| Therefore, Se                                   | et Point; W = ( my                     | v x Qstd + bw            | ) <sup>2</sup> x ( 760 / Pa ) x ( '                                                                                                            | Γa / 298 ) =           | 3.98                   |            |                                               |  |
|                                                 |                                        |                          |                                                                                                                                                |                        |                        |            |                                               |  |
|                                                 |                                        |                          |                                                                                                                                                |                        |                        |            |                                               |  |
| Remarks:                                        |                                        |                          |                                                                                                                                                |                        |                        |            | <del></del>                                   |  |
| Conducted by:<br>Checked by:                    | Wk. Jang<br> ->v                       | Signature:<br>Signature: | kwo                                                                                                                                            | <u>.</u>               |                        | Date:      | 20/1/2017<br>20 January 2017                  |  |

### CINOTECH

File No. MA14008/62/0038 Station AM4(A) - EMSD Workshops Operator: WK Date: Next Due Date: 20-Jan-17 21-Nov-16 Equipment No.: A-01-62 Serial No. 2351 Ambient Condition Temperature, Ta (K) 297.2 Pressure, Pa (mmHg) 761.1 Orifice Transfer Standard Information Serial No.: 2896 Slope, mc (CFM) 0.0598 Intercept, bc -0.05079 mc x Qstd + bc =  $[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$ Last Calibration Date: 4-Mar-16 Qstd =  $\{ [\Delta H \times (Pa/760) \times (298/Ta)]^{1/2} -bc \} / mc$ Next Calibration Date: 3-Mar-17 Calibration of TSP Sampler Orfice HVS Calibration  $\Delta H$  (orifice), Qstd (CFM)  $\Delta W$  (HVS), in.  $[\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$ Point [ΔH x (Pa/760) x (298/Ta)]<sup>1/2</sup> in. of water X - axis of water Y-axis 10.8 3.29 55.93 7.4 2.73 2 9.7 3.12 53.05 6.3 2,52 3 7.4 2.73 46.44 5.0 2.24 4 5.2 2.29 39.07 3.3 1.82 3.3 1.82 31.30 2.1 1.45 By Linear Regression of Y on X Slope, mw = 0.0510Intercept, bw : -0.1538 Correlation coefficient\* = \*If Correlation Coefficient < 0.990, check and recalibrate. Set Point Calculation From the TSP Field Calibration Curve, take Qstd = 43 CFM From the Regression Equation, the "Y" value according to mw x Qstd + bw =  $[\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$ Therefore, Set Point;  $W = (mw \times Qstd + bw)^2 \times (760 / Pa) \times (Ta / 298) =$  4.15 Remarks:

Checked by:

Date:

Date:



| Station AM5(A) - Po Leung Kuk Ngan Po Ling College Operator: WK  Date: 21-Nov-16 Next Due Date: 20-Jan-17  Equipment No.: A-01-60 Serial No. 2358 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Equipment No.: A-01-60 Serial No. 2358  Ambient Condition                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Ambient Condition                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Temperature, Ta (K) 297.9 Pressure, Pa (mmHg)                                                                                                     | 761.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Orifice Transfer Standard Information                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Serial No.: 2896 Slope, mc (CFM) 0.0598 Intercept, bc                                                                                             | -0.05079                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Last Calibration Date: $4-\text{Mar}-16$ $\text{mc x Qstd} + \text{bc} = [\Delta H \text{ x } (Pa/760) \text{ x}]$                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Next Calibration Date: 3-Mar-17 Qstd = $\{[\Delta H \times (Pa/760) \times (298/Ta)]\}$                                                           | ] <sup>1/2</sup> -bc} / me                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| ·                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Calibration of TSP Sampler                                                                                                                        | Table   Tabl   |
| Calibration Orfice                                                                                                                                | HVS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|                                                                                                                                                   | V x (Pa/760) x (298/Ta)] <sup>1/2</sup> Y-<br>axis                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| 1 11.4 3.38 57.39 7.8                                                                                                                             | 2.80                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 2 9.8 3.13 53.27 6.7                                                                                                                              | 2.59                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 3 7.5 2.74 46.71 5.1                                                                                                                              | 2.26                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 4 5.1 2.26 38.66 3.4                                                                                                                              | 1.85                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 5 3.2 1.79 30.80 2.0                                                                                                                              | 1,42                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| By Linear Regression of Y on X  Slope , mw =                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| *If Correlation Coefficient < 0.990, check and recalibrate.                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Set Point Calculation                                                                                                                             | 140 m                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| From the TSP Field Calibration Curve, take Qstd = 43 CFM                                                                                          | Christian Christ |
| From the Regression Equation, the "Y" value according to                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| mw x Qstd + bw = $[\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Therefore, Set Point; $W = (mw \times Qstd + bw)^2 \times (760 / Pa) \times (Ta / 298) = 4.23$                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Remarks:                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 1                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Conducted by: Wk. 70n1 Signature: Kwai   Date:                                                                                                    | : 21/1/16                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Checked by: Signature: Date:                                                                                                                      | : DI Natember 2014                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

# **High-Volume TSP Sampler** 5-POINT CALIBRATION DATA SHEET



|                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                  |                                   |                                              |                               | File No                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | MA14008/60/0040                   |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|-----------------------------------|----------------------------------------------|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|
| Station                                 | AM5(A) - Po Le                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | eung Kuk Ngan I  | Po Ling College                   | Operator:                                    | WK                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                   |
| Date:                                   | 20-Jan-17                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                  | ]                                 | Next Due Date:                               | 19-Mar                        | -17                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                   |
| Equipment No.:                          | A-01-60                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                  | <del>-</del>                      | Serial No.                                   | 2358                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                   |
|                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                  |                                   |                                              |                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                   |
|                                         | <u> </u>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                  | 1                                 | Condition                                    | <b>I</b>                      | \$15.10 A \$4.5 FE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                   |
| Temperatu                               | ıre, Ta (K)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 289.5            | Pressure, Pa                      | (mmHg)                                       |                               | 770.6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                   |
|                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                  |                                   | 515,265,535,665,935,5                        |                               | distribuis de la                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                   |
| gi1                                     | I NTo .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                  | rifice Transfer Sta               | 1                                            | I                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 0.05070                           |
| Serial<br>Last Calibr                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 2896<br>4-Mar-16 | Slope, mc (CFM)                   | •                                            | Intercep<br>oc = [ΔH x (Pa/76 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | -0.05079                          |
| Next Calibr                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 3-Mar-17         | -                                 |                                              | x (Pa/760) x (298             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | -                                 |
| NOAL CALLOI                             | ation Date.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | J-IVIAL-17       | <b></b>                           | Qata ( AII)                                  | A (1 A) 700) X (230)          | /xa)j -bc;/                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | AAC                               |
|                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                  | Calibration of                    | 'TSP Sampler                                 |                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                   |
|                                         | The state of the s | Or               | ·fice                             | - vi Sampiel                                 |                               | HVS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | <u> </u>                          |
| Calibration<br>Point                    | ΔH (orifice),                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                  | •                                 | Qstd (CFM)                                   | ΔW (HVS), in.                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 60) x (298/Ta)] <sup>1/2</sup> Y- |
| romt                                    | in. of water                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | [ΔH x (Pa/76     | 60) x (298/Ta)] <sup>1/2</sup>    | X - axis                                     | of water                      | (= / .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | axis                              |
| 1                                       | 11.3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | :                | 3.43                              | 58.29                                        | 7.9                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 2.87                              |
| 2                                       | 9.7                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | :                | 3.18                              | 54.07                                        | 6.8                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 2.66                              |
| 3                                       | 7.6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                  | 2.82                              | 47.96                                        | 5.3                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 2.35                              |
| 4                                       | 5.2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | :                | 2.33                              | 39.81                                        | 3.3                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 1.86                              |
| 5                                       | 3.4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                  | 1.88                              | 32.36                                        | 2.3                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 1.55                              |
|                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                  |                                   |                                              |                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                   |
| By Linear Regi                          | ression of Y on X                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                  |                                   |                                              |                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                   |
| Slope , mw =                            | 0.0523                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | _                |                                   | Intercept, bw :                              | -0.171                        | .0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                   |
| Correlation c                           | oefficient* = _                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 0.9              | 9983                              | _                                            |                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                   |
| *If Correlation C                       | Coefficient < 0.99                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 0, check and rec | calibrate.                        |                                              |                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                   |
| 128000000000000000000000000000000000000 | er Thios county was assessed against a se                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                  |                                   |                                              |                               | oberes C. Colon prompteting system                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                   |
|                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                  | Set Point C                       | Calculation                                  |                               | in in the contract of the cont |                                   |
|                                         | ield Calibration C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                  |                                   |                                              |                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                   |
| From the Regres                         | ssion Equation, th                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | e "Y" value acco | ording to                         |                                              |                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                   |
|                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | mw x (           | $Qstd + bw = [\Delta W]$          | x (Pa/760) x (2                              | 98/Ta)] <sup>1/2</sup>        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                   |
|                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                  |                                   |                                              | 71                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                   |
| Therefore, S                            | et Point; W = ( m                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | w x Qstd + bw)   | <sup>2</sup> x ( 760 / Pa ) x ( 7 | Γa / 298 ) =                                 | 4.13                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                   |
|                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                  |                                   |                                              |                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                   |
|                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                  |                                   |                                              |                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                   |
|                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                  |                                   |                                              |                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                   |
| Remarks:                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                  |                                   |                                              |                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | ****                              |
|                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                  |                                   |                                              | ··                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                   |
| C ( 11                                  | . d. 7 n. n                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | a                | L                                 | . 1                                          |                               | D .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 7 / / 17                          |
| Conducted by:                           | WK lang                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Signature:       |                                   | ar /                                         |                               | Date:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 2011/2011                         |
| Checked by:                             | 19~                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Signature:       |                                   | <u>/                                    </u> |                               | Date:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | do January de                     |



TISCH ENVIRONMENTAL, INC. 145 SOUTH MIAMI AVE VILLAGE OF CLEVES, OH 45002 513.467.9000 877.263.7610 TOLL FREE 513.467.9009 FAX

# ORIFICE TRANSFER STANDARD CERTIFICATION WORKSHEET TE-5025A

|                       |                         | Rootsmeter Orifice I.I     |                                      | 438320<br>2896                                 | Ta (K) -<br>Pa (mm) -            | 295<br>· 755.65                      |
|-----------------------|-------------------------|----------------------------|--------------------------------------|------------------------------------------------|----------------------------------|--------------------------------------|
| PLATE<br>OR<br>Run #  | VOLUME<br>START<br>(m3) | VOLUME<br>STOP<br>(m3)     | DIFF<br>VOLUME<br>(m3)               | DIFF<br>TIME<br>(min)                          | METER<br>DIFF<br>Hg<br>(mm)      | ORFICE<br>DIFF<br>H2O<br>(in.)       |
| 1<br>2<br>3<br>4<br>5 | NA<br>NA<br>NA<br>NA    | NA<br>NA<br>NA<br>NA<br>NA | 1.00<br>1.00<br>1.00<br>1.00<br>1.00 | 1.4340<br>1.0250<br>0.9150<br>0.8770<br>0.7210 | 3.2<br>6.4<br>7.9<br>8.7<br>12.7 | 2.00<br>4.00<br>5.00<br>5.50<br>8.00 |

### DATA TABULATION

| Vstd                                           | (x axis)<br>Qstd                               | (y axis)                                       |      | Va                                             | (x axis)<br>Qa                                 | (y axis)                                       |
|------------------------------------------------|------------------------------------------------|------------------------------------------------|------|------------------------------------------------|------------------------------------------------|------------------------------------------------|
| 1.0001<br>0.9959<br>0.9938<br>0.9928<br>0.9875 | 0.6974<br>0.9716<br>1.0861<br>1.1320<br>1.3696 | 1.4173<br>2.0044<br>2.2410<br>2.3503<br>2.8346 |      | 0.9957<br>0.9915<br>0.9894<br>0.9885<br>0.9831 | 0.6944<br>0.9674<br>1.0814<br>1.1271<br>1.3636 | 0.8836<br>1.2496<br>1.3971<br>1.4653<br>1.7672 |
| Qstd slop<br>intercept<br>coefficie            | (b) = 1                                        | 2.11176<br>-0.05079<br>0.99982                 |      | Qa slope<br>intercept<br>coefficie             | (b) =                                          | 1.32235<br>-0.03166<br>0.99982                 |
| y = SQRT[H20(Pa/760)(298/Ta)]                  |                                                |                                                | [a)] | y axis =                                       | SQRT [H20 (T                                   | 'a/Pa)]                                        |

#### CALCULATIONS

Vstd = Diff. Vol[(Pa-Diff. Hg)/760](298/Ta)
Qstd = Vstd/Time

Va = Diff Vol [(Pa-Diff Hg)/Pa]
Qa = Va/Time

For subsequent flow rate calculations:

Qstd =  $1/m\{[SQRT(H2O(Pa/760)(298/Ta))] - b\}$ Qa =  $1/m\{[SQRT H2O(Ta/Pa)] - b\}$ 



Rms 1516, 1701 & 1716, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong. Tel: 2898 7388 Fax: 2898 7076

Website: www.wellab.com.hk

## TEST REPORT

APPLICANT: Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Test Report No.: C/160820

Date of Issue: 2016-08-20

Date Received: 2016-08-20 Date Tested: 2016-08-20

Date Completed: 2016-08-20

Next Due Date: 2017-02-19

ATTN:

Miss Mei Ling Tang

Page:

1 of 2

## **Certificate of Calibration**

### Item for calibration:

Description

: Weather Monitor II

Manufacturer

: Davis Instruments

Model No.

: 7440

Serial No.

: MC01010A44

#### Test conditions:

Room Temperature

: 24 degree Celsius

Relative Humidity

: 56 %

## **Test Specifications:**

- 1. Performance check of anemometer
- 2. Performance check of wind direction sensor

#### Methodology:

In-house method with reference anemometer (RS232 Integral Vane Digital Anemometer)

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE
Laboratory Manager

This report may not be reproduced, except in full, without prior written approval from WELLAB LIMITED and the results relate only to the items calibrated or tested.

Website: www.wellab.com.hk



**TEST REPORT** 

| Test Report No.: | C/160820   |
|------------------|------------|
| Date of Issue:   | 2016-08-20 |
| Date Received:   | 2016-08-20 |
| Date Tested:     | 2016-08-20 |
| Date Completed:  | 2016-08-20 |
| Next Due Date:   | 2017-02-19 |

Page:

2 of 2

## **Results:**

1. Performance check of anemometer

| Air Velo                | Difference D (m/s)   |             |
|-------------------------|----------------------|-------------|
| Instrument Reading (V1) | Reference Value (V1) | D = V1 - V2 |
| 2.00                    | 2.00                 | 0.00        |

2. Performance check of wind direction sensor

| Wind Dire               | ection (°)           | Difference D (°) |
|-------------------------|----------------------|------------------|
| Instrument Reading (W1) | Reference Value (W2) | D = W1 - W2      |
| 0                       | 0                    | 0                |
| 45.2                    | 45                   | 0.2              |
| 90.1                    | 90                   | 0.1              |
| 134.8                   | 135                  | -0.2             |
| 180.3                   | 180                  | 0.3              |
| 225.1                   | 225                  | 0.1              |
| 270.2                   | 270                  | 0.2              |
| 315.1                   | 315                  | 0.1              |
| 360                     | 360                  | 0                |



Rms 1516, 1701 & 1716, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong. Tel: 2898 7388 Fax: 2898 7076 Website: www.wellab.com.hk

## TEST REPORT

APPLICANT: Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

 Test Report No.:
 C/A/170106A

 Date of Issue:
 2017-01-09

 Date Received:
 2017-01-06

 Date Tested:
 2017-01-06

 Date Completed:
 2017-01-09

 Next Due Date:
 2017-03-08

ATTN:

Mr. W. K. Tang

Page:

1 of 1

# **Certificate of Calibration**

#### Item for Calibration:

Description

: Laser Dust Monitor

Manufacturer

: Sibata

Model No.

: LD-3

Serial No.

: 251634

Sensitivity (K) 1 CPM

 $: 0.001 \text{ mg/m}^3$ 

Sen. Adjustment Scale Setting

: 550 CPM

Equipment No.

: A-02-01

#### **Test Conditions:**

Room Temperature

: 22 degree Celsius

Relative Humidity

: 63 %

#### Test Specifications & Methodology:

- 1. Instruction and Operation Manual High Volume Sampler, Andersen Samplers, Inc.
- 2. In-house method in according to the instruction manual: The Laser Dust Monitor was compared with a calibrated High Volume Sampler and the result was used to generate the Correlation Factor (CF) between the Laser Dust Monitor and High Volume Sampler.

# Results:

Correlation Factor (CF)

0.0037

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE



Rms 1516, 1701 & 1716, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong. Tel: 2898 7388 Fax: 2898 7076 Website: www.wellab.com.hk

#### TEST REPORT

APPLICANT: Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

| Test Report No.: | C/A/161104A |
|------------------|-------------|
| Date of Issue:   | 2016-11-07  |
| Date Received:   | 2016-11-04  |
| Date Tested:     | 2016-11-04  |
| Date Completed:  | 2016-11-07  |
| Next Due Date:   | 2017-01-06  |

ATTN:

Mr. W. K. Tang

Page:

1 of 1

### Certificate of Calibration

#### Item for Calibration:

Description : Laser Dust Monitor

Manufacturer : Sibata

Model No. : LD-3B

Serial No. : 853944

Sensitivity (K) 1 CPM : 0.001 mg/m³

Sen. Adjustment Scale Setting : 685 CPM

Equipment No.

: A-02-04

**Test Conditions:** 

Room Temperature : 22 degree Celsius

Relative Humidity : 61 %

# Test Specifications & Methodology:

- 1. Instruction and Operation Manual High Volume Sampler, Andersen Samplers, Inc.
- 2. In-house method in according to the instruction manual: The Laser Dust Monitor was compared with a calibrated High Volume Sampler and the result was used to generate the Correlation Factor (CF) between the Laser Dust Monitor and High Volume Sampler.

#### Results:

| a 1 th B th (CD)        | 0.0024    |
|-------------------------|-----------|
| Correlation Factor (CF) | 1 (11)(34 |
| Corolation radios (Cr.) | 0.003 1   |
|                         | t.,       |

\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE



Rms 1516, 1701 & 1716, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong. Tel: 2898 7388 Fax: 2898 7076 Website: www.wellab.com.hk

### TEST REPORT

APPLICANT: Cinotech Co

**Cinotech Consultants Limited** 

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Test Report No.: C/A/170106B Date of Issue: 2017-01-09

Date Received: 2017-01-09

Date Tested: 2017-01-06

Date Completed: 2017-01-09 Next Due Date: 2017-03-08

ATTN:

Mr. W. K. Tang

Page:

1 of 1

## **Certificate of Calibration**

#### Item for Calibration:

Description

: Laser Dust Monitor

Manufacturer

: Sibata

MadalNia

: LD-3B

Model No.

. בנכ-טם

Serial No.

: 853944

Sensitivity (K) 1 CPM

 $: 0.001 \text{ mg/m}^3$ 

Sen. Adjustment Scale Setting

: 685 CPM

Equipment No.

: A-02-04

#### **Test Conditions:**

Room Temperature

: 22 degree Celsius

Relative Humidity

: 63 %

# Test Specifications & Methodology:

- 1. Instruction and Operation Manual High Volume Sampler, Andersen Samplers, Inc.
- 2. In-house method in according to the instruction manual: The Laser Dust Monitor was compared with a calibrated High Volume Sampler and the result was used to generate the Correlation Factor (CF) between the Laser Dust Monitor and High Volume Sampler.

#### Results:

Correlation Factor (CF) 0.0038

\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE



Rms 1516, 1701 & 1716, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong. Tel: 2898 7388 Fax: 2898 7076 Website: www.wellab.com.hk

#### TEST REPORT

APPLICANT: Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Test Report No.: C/A/170106C

Date of Issue: 2017-01-09

Date Received: 2017-01-06

Date Tested: 2017-01-06

Date Completed: 2017-01-09

Next Due Date:

2017-01-09 2017-03-08

16

Page:

1 of 1

# ATTN:

Mr. W. K. Tang

### **Certificate of Calibration**

#### Item for Calibration:

Description

: Laser Dust Monitor

Manufacturer

: Sibata

Model No.

: LD-3B

Serial No.

: 014750

Sensitivity (K) 1 CPM

 $: 0.001 \text{ mg/m}^3$ 

Sen. Adjustment Scale Setting

: 790 CPM

Equipment No.

: A-02-06

#### **Test Conditions:**

Room Temperature

: 22 degree Celsius

Relative Humidity

: 63 %

# Test Specifications & Methodology:

- 1. Instruction and Operation Manual High Volume Sampler, Andersen Samplers, Inc.
- 2. In-house method in according to the instruction manual: The Laser Dust Monitor was compared with a calibrated High Volume Sampler and the result was used to generate the Correlation Factor (CF) between the Laser Dust Monitor and High Volume Sampler.

#### Results:

Correlation Factor (CF) 0.0035

\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE



Rms 1516, 1701 & 1716, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong. Tel: 2898 7388 Fax: 2898 7076 Website: www.wellab.com.hk

#### TEST REPORT

APPLICANT:

Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Test Report No.:
Date of Issue:
Date Received:

C/A/161104C 2016-11-07

Date Tested:

2016-11-04 2016-11**-**04

Date Completed: Next Due Date: 2016-11-07 2017-01-06

Page:

1 of 1

ATTN:

Mr. W. K. Tang

#### Certificate of Calibration

#### Item for Calibration:

Description

: Laser Dust Monitor

Manufacturer

: Sibata

Model No.

: LD-3B

Serial No.

: 541146

Sensitivity (K) 1 CPM

 $: 0.001 \text{ mg/m}^3$ 

Sen. Adjustment Scale Setting

: 625 CPM

Equipment No.

: A-02-07

#### **Test Conditions:**

Room Temperature

: 22 degree Celsius

Relative Humidity

: 61 %

### Test Specifications & Methodology:

- 1. Instruction and Operation Manual High Volume Sampler, Andersen Samplers, Inc.
- 2. In-house method in according to the instruction manual: The Laser Dust Monitor was compared with a calibrated High Volume Sampler and the result was used to generate the Correlation Factor (CF) between the Laser Dust Monitor and High Volume Sampler.

\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*

#### Results:


Correlation Factor (CF)

0.0031

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE





Rms 1516, 1701 & 1716, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong. Tel: 2898 7388 Fax: 2898 7076 Website: www.wellab.com.hk

#### TEST REPORT

APPLICANT: Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Test Report No.: C/A/170106
Date of Issue: 2017-01-09
Date Received: 2017-01-06
Date Tested: 2017-01-06
Date Completed: 2017-01-09
Next Due Date: 2017-03-08

ATTN:

Mr. W. K. Tang

Page:

1 of 1

# **Certificate of Calibration**

#### Item for Calibration:

Description

: Laser Dust Monitor

Manufacturer Model No.

: Sibata : LD-3B

Model No. Serial No.

: 541146

Sensitivity (K) 1 CPM

: 0.001 mg/m<sup>3</sup> : 625 CPM

Sen. Adjustment Scale Setting

, 023 CI IV

Equipment No.

: A-02-07

#### **Test Conditions:**

Room Temperature

: 22 degree Celsius

Relative Humidity

: 63 %

#### Test Specifications & Methodology:

1. Instruction and Operation Manual High Volume Sampler, Andersen Samplers, Inc.

\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*

2. In-house method in according to the instruction manual: The Laser Dust Monitor was compared with a calibrated High Volume Sampler and the result was used to generate the Correlation Factor (CF) between the Laser Dust Monitor and High Volume Sampler.

#### Results:

Correlation Factor (CF)

0.0033

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

RATRICK TSE



Rms 1516, 1701 & 1716, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong. Tel: 2898 7388 Fax: 2898 7076 Website: www.wellab.com.hk

#### TEST REPORT

APPLICANT: Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Test Report No.: C/161230
Date of Issue: 2017-01-03
Date Received: 2016-12-30
Date Tested: 2016-12-30
Date Completed: 2017-01-03
Next Due Date: 2017-03-02

ATTN:

Mr. W. K. Tang

Page:

1 of 1

## **Certificate of Calibration**

#### Item for Calibration:

Description

: Laser Dust Monitor

Manufacturer

: Sibata

Model No.

: LD-3B

Serial No.

: 095029

Sensitivity (K) 1 CPM

 $: 0.001 \text{ mg/m}^3$ 

Sen. Adjustment Scale Setting

: 551 CPM

Equipment No.

: A-02-10

**Test Conditions:** 

Room Temperature

: 22 degree Celsius

Relative Humidity

: 66 %

#### Test Specifications & Methodology:

- 1. Instruction and Operation Manual High Volume Sampler, Andersen Samplers, Inc.
- 2. In-house method in according to the instruction manual: The Laser Dust Monitor was compared with a calibrated High Volume Sampler and the result was used to generate the Correlation Factor (CF) between the Laser Dust Monitor and High Volume Sampler.

# Results:


Correlation Factor (CF) 0.0038

\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE





Rms 1516, 1701 & 1716, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong. Tel: 2898 7388 Fax: 2898 7076 Website: www.wellab.com.hk

#### TEST REPORT

APPLICANT: Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

| Test Report No.: | C/161230D  |
|------------------|------------|
| Date of Issue:   | 2017-01-03 |
| Date Received:   | 2016-12-30 |
| Date Tested:     | 2016-12-30 |
| Date Completed:  | 2017-01-03 |
| Next Due Date:   | 2017-03-02 |

ATTN:

Mr. W. K. Tang

Page:

1 of 1

# **Certificate of Calibration**

#### Item for Calibration:

Description

: Dust Monitor

Manufacturer

: Met One Instruments

Model No.

: AEROCET-531

Serial No.

: N6734

Flow rate

:0.1 cfm

Zero Count Test

:0 mg (The result of the 2-minute sample)

Equipment No.

: A-02-13

#### **Test Conditions:**

Room Temperature

: 22 degree Celsius

Relative Humidity

: 66 %

#### Test Specifications & Methodology:

- 1. Instruction and Operation Manual High Volume Sampler, Andersen Samplers, Inc.
- 2. In-house method in according to the instruction manual: The Dust Monitor was compared with a calibrated High Volume Sampler and the result was used to generate the Correlation Factor (CF) between the Dust Monitor and High Volume Sampler.

#### Results:

| (CD)                                    | 1 100  |
|-----------------------------------------|--------|
| T Correlation Factor (CF)               | 1 1183 |
| 001101111111111111111111111111111111111 | 1.105  |
|                                         |        |

\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE



Rms 1516, 1701 & 1716, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong. Tel: 2898 7388 Fax: 2898 7076 Website; www.wellab.com.hk

## TEST REPORT

APPLICANT:

Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Test Report No.: C/N/160917B

Date of Issue: 2016-09-19

Date Received: 2016-09-17 Date Tested: 2016-09-17

Date Completed: 2016-09-19 Next Due Date: 2017-09-18

Page:

1 of 1

ATTN:

Mr. W.K. Tang

## **Certificate of Calibration**

### Item for calibration:

Description

: 'SVANTEK' Integrating Sound Level Meter

Manufacturer

: SVANTEK

Model No.

: SVAN 955

Serial No.

: 12553

Microphone No.

:35222

Equipment No.

: N-08-02

Test conditions:

Room Temperatre

: 24 degree Celsius

Relative Humidity

: 57%

### **Test Specifications:**

Performance checking at 94 and 114 dB

#### Methodology:

In-house method, according to manufacturer instruction manual


#### Results:

| Reference Set Point, dB | Instrument Readings, dB |
|-------------------------|-------------------------|
| 94                      | 94.0                    |
| 114                     | 114.0                   |

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE Laboratory Manager





Rms 1516, 1701 & 1716, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong. Tel: 2898 7388 Fax: 2898 7076 Website: www.wellab.com.hk

#### TEST REPORT

APPLICANT: Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Test Report No.: C/N/160917C
Date of Issue: 2016-09-19
Date Received: 2016-09-17
Date Tested: 2016-09-17
Date Completed: 2016-09-19
Next Due Date: 2017-09-18

ATTN:

Mr. W.K. Tang

Page:

1 of 1

# **Certificate of Calibration**

#### Item for calibration:

Description

: 'SVANTEK' Integrating Sound Level Meter

Manufacturer

: SVANTEK : SVAN 955

Model No. Serial No.

: 12563

Microphone No.

: 34377

Equipment No.

: N-08-03

#### Test conditions:

Room Temperatre

: 24 degree Celsius

Relative Humidity

: 57%

#### **Test Specifications:**

Performance checking at 94 and 114 dB

#### Methodology:

In-house method, according to manufacturer instruction manual

#### Results:

| Reference Set Point, dB | Instrument Readings, dB |
|-------------------------|-------------------------|
| 94                      | 94.0                    |
| 114                     | 114.0                   |

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE



ATTN:

WELLAB LIMITED

Rms 816, 1516 & 1701, Technology Park, 18 On Lai Street, Shatin, N.T. Hong Kong. Tel: 2898 7388 Fax: 2898 7076

Website: www.wellab.com.hk

#### TEST REPORT

APPLICANT: Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Test Report No.: C/N/160826A Date of Issue: 2016-08-29

Date Received: 2016-08-26

Date Tested: 2016-08-26

Date Completed: 2016-08-29 Next Due Date: 2017-08-28

Mr. W.K. Tang Page: 1 of 1

# **Certificate of Calibration**

#### Item for calibration:

Description : 'SVANTEK' Integrating Sound Level Meter

Manufacturer : SVANTEK Model No. : SVAN 957 Serial No. : 21455

Microphone No. : 43730 Equipment No. : N-08-07

Test conditions:

Room Temperatre : 25 degree Celsius

Relative Humidity : 57%

## **Test Specifications:**

Performance checking at 94 and 114 dB

#### Methodology:

In-house method, according to manufacturer instruction manual


### **Results:**

| Reference Set Point, dB | Instrument Readings, dB |  |
|-------------------------|-------------------------|--|
| 94                      | 94.0                    |  |
| 114                     | 114.0                   |  |

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE
Laboratory Manager





Rms 1516, 1701 & 1716, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong, Tel: 2898 7388 Fax: 2898 7076 Website: www.wellab.com.hk

## TEST REPORT

APPLICANT:

Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Test Report No.: C/N/160819B Date of Issue: 2016-08-22 Date Received: 2016-08-19 Date Tested: 2016-08-19 Date Completed:

Next Due Date:

2016-08-22

2017-08-21

ATTN:

Mr. W.K. Tang

Page:

1 of 1

# **Certificate of Calibration**

#### Item for calibration:

Description

: 'SVANTEK' Integrating Sound Level Meter

Manufacturer Model No.

: SVANTEK : SVAN 957

Serial No.

: 21459

Microphone No.

: 43676

Equipment No.

: N-08-08

### Test conditions:

Room Temperatre

: 24 degree Celsius

Relative Humidity

: 58%

#### **Test Specifications:**

Performance checking at 94 and 114 dB

## Methodology:

In-house method, according to manufacturer instruction manual


#### Results:

| Reference Set Point, dB | Instrument Readings, dB |  |
|-------------------------|-------------------------|--|
| 94                      | 94.0                    |  |
| 114                     | 114.0                   |  |

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE





Rms 1516, 1701 & 1716, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong. Tel: 2898 7388 Fax: 2898 7076 Website: www.wellab.com.hk

# TEST REPORT

APPLICANT:

Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

 Test Report No.:
 C/N/160819C

 Date of Issue:
 2016-08-22

 Date Received:
 2016-08-19

 Date Tested:
 2016-08-19

 Date Completed:
 2016-08-22

ATTN:

Mr. W.K. Tang

Page:

Next Due Date:

1 of 1

2017-08-21

# **Certificate of Calibration**

#### Item for calibration:

Description

: 'SVANTEK' Integrating Sound Level Meter

Manufacturer Model No.

: SVANTEK : SVAN 957

Serial No.

: 21460

Microphone No. Equipment No.

: 43679 : N-08-09

Test conditions:

Room Temperatre

: 24 degree Celsius

Relative Humidity

: 58%

# **Test Specifications:**

Performance checking at 94 and 114 dB

#### Methodology:

In-house method, according to manufacturer instruction manual

#### Results:

| Reference Set Point, dB | Instrument Readings, dB |  |
|-------------------------|-------------------------|--|
| 94                      | 94.0                    |  |
| 114                     | 114.0                   |  |

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE



WELLAB LIMITED

Rms 816, 1516 & 1701, Technology Park,
18 On Lai Street, Shatin, N.T. Hong Kong.
Tel: 2898 7388 Fax: 2898 7076
Website: www.wellab.com.hk

# TEST REPORT

APPLICANT: Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Test Report No.: C/N/161128
Date of Issue: 2016-11-30
Date Received: 2016-11-28
Date Tested: 2016-11-28
Date Completed: 2016-11-30
Next Due Date: 2017-11-29

ATTN:

Mr. W.K. Tang

Page:

1 of 1

# **Certificate of Calibration**

#### Item for calibration:

Description

: 'SVANTEK' Integrating Sound Level Meter

Manufacturer Model No.

: SVANTEK : SVAN 957

Serial No.

: 23853 : 48530

Microphone No. Equipment No.

: N-08-10

#### **Test conditions:**

Room Temperatre

: 21 degree Celsius

Relative Humidity

: 66%

#### **Test Specifications:**

Performance checking at 94 and 114 dB

### Methodology:

In-house method, according to manufacturer instruction manual

#### Results:

| Reference Set Point, dB | Instrument Readings, dB |  |
|-------------------------|-------------------------|--|
| 94                      | 94.0                    |  |
| 114                     | 114.0                   |  |

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE
Laboratory Manager



力

WELLAB LIMITED

Rms 1516, 1701 & 1716, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong. Tel: 2898 7388 Fax: 2898 7076 Website: www.wellab.com.hk

## TEST REPORT

APPLICANT: Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

| Test Report No.: | C/N/160930A |
|------------------|-------------|
| Date of Issue:   | 2016-10-03  |
| Date Received:   | 2016-09-30  |
| Date Tested:     | 2016-09-30  |
| Date Completed:  | 2016-10-03  |
| Next Due Date:   | 2017-10-02  |

ATTN:

Mr. W.K. Tang

Page:

1 of 1

#### Item for calibration:

Description

: Acoustical Calibrator

Manufacturer Model No. : SVANTEK : SV30A

Serial No.

: 24803

Equipment No.

: N-09-03

#### Test conditions:

Room Temperatre

: 25 degree Celsius

Relative Humidity

: 60%

### Methodology:

The Sound Level Calibrator has been calibrated in accordance with the documented procedures and using standard(s) and instrument(s) which are recommended by the manufacturer, or equivalent.

#### Results:

| Sound Pressure Level (1kHz) | Measured SPL | Tolerance      |
|-----------------------------|--------------|----------------|
| At 94 dB SPL                | 94.0         | 94.0 ± 0.1 đB  |
| At 114 dB SPL               | 114.0        | 114.0 ± 0.1 dB |

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE





Rms 1516, 1701 & 1716, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong. Tel: 2898 7388 Fax: 2898 7076 Website: www.wellab.com.hk

# TEST REPORT

APPLICANT:

**Cinotech Consultants Limited** 

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

| Test Report No.: | C/N/160930B |
|------------------|-------------|
| Date of Issue:   | 2016-10-03  |
| Date Received:   | 2016-09-30  |
| Date Tested:     | 2016-09-30  |
| Date Completed:  | 2016-10-03  |
| Next Due Date:   | 2017-10-02  |

ATTN:

Mr. W.K. Tang

Page:

1 of 1

### Item for calibration:

Description

: Acoustical Calibrator

Manufacturer

: SVANTEK

Model No.

: SV30A

Serial No.

: 24791

Equipment No.

: N-09-04

#### Test conditions:

Room Temperatre

: 25 degree Celsius

Relative Humidity

: 60%

### Methodology:

The Sound Level Calibrator has been calibrated in accordance with the documented procedures and using standard(s) and instrument(s) which are recommended by the manufacturer, or equivalent.

#### **Results:**

| Sound Pressure Level (1kHz) | Measured SPL | Tolerance      |
|-----------------------------|--------------|----------------|
| At 94 dB SPL                | 94.0         | 94.0 ± 0.1 dB  |
| At 114 dB SPL               | 114.0        | 114.0 ± 0.1 dB |

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE



Rms 1516, 1701 & 1716, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong. Tel: 2898 7388 Fax: 2898 7076 Website: www.wellab.com.hk

## TEST REPORT

APPLICANT:

Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

| Test Report No.: | C/N/160930C |
|------------------|-------------|
| Date of Issue:   | 2016-10-03  |
| Date Received:   | 2016-09-30  |
| Date Tested:     | 2016-09-30  |
| Date Completed:  | 2016-10-03  |
| Next Due Date:   | 2017-10-02  |

ATTN:

Mr. W.K. Tang

Page:

1 of 1

#### Item for calibration:

Description

: Acoustical Calibrator

Manufacturer

: SVANTEK

Model No.

: SV30A

Serial No.

: 24780

Equipment No.

: N-09-05

#### Test conditions:

Room Temperatre

: 25 degree Celsius

Relative Humidity

: 60%

### Methodology:

The Sound Level Calibrator has been calibrated in accordance with the documented procedures and using standard(s) and instrument(s) which are recommended by the manufacturer, or equivalent.

#### **Results:**

| Sound Pressure Level (1kHz) | Measured SPL | Tolerance      |
|-----------------------------|--------------|----------------|
| At 94 dB SPL                | 94.0         | 94.0 ± 0.1 dB  |
| At 114 dB SPL               | 114.0        | 114.0 ± 0.1 dB |

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE



WELLAB LIMITED
Rus 816, 1516 & 1701, Technology Park,
18 On Lai Street, Shatin, N.E. Hong Kong,
Tel: 2898 7388 Fax: 2898 7076
Website: www.wellab.com.hk

# TEST REPORT

APPLICANT:

Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Test Report No.: C/N/161104/1
Date of Issue: 2016-11-07
Date Received: 2016-11-04
Date Tested: 2016-11-04
Date Completed: 2016-11-07
Next Due Date: 2017-11-06

ATTN:

Mr. W.K. Tang

Page:

1 of 1

#### Item for calibration:

Description

: Acoustical Calibrator

Manufacturer

: Brüel & Kjær

Model No.

: 4231

Serial No.

: 2326353

Equipment No.

: N-02-01

#### Test conditions:

Room Temperatre

: 21 degree Celsius

Relative Humidity

: 62 %

# Methodology:

The sound calibrator has been calibrated in accordance with the documented procedures and using standard(s) and instrument(s) which are recommended by the manufacturer, or equivalent.

#### Results:

| Sound Pressure Level (1kHz) | Measured SPL | Tolerance      |
|-----------------------------|--------------|----------------|
| At 94 dB SPL                | 94.0         | 94.0 ± 0.1 dB  |
| At 114 dB SPL               | 114.0        | 114.0 ± 0.1 dB |

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE
Laboratory Manager

This report may not be reproduced except with prior written approval from WELLAB LIMITED and the results relate only to the items calibrated or tested.



Rms 1516, 1701 & 1716, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong. Tel: 2898 7388 Fax: 2898 7076 Website: www.weilab.com.hk

# TEST REPORT

APPLICANT:

Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Test Report No.: C/N/160819D

Date of Issue: 2016-08-22

Date Received: 2016-08-19

Date Tested: 2016-08-19

Date Completed: 2016-08-22

Next Due Date:

2017-08-21

ATTN:

Mr. W.K. Tang

# Page:

1 of 1

# **Certificate of Calibration**

#### Item for calibration:

Description

: Acoustical Calibrator

Manufacturer

: Brüel & Kjær

Model No.

: 4231

Serial No.

: 2412367

Equipment No.

: N-02-03

#### Test conditions:

Room Temperatre

: 24 degree Celsius

Relative Humidity

: 58%

### Methodology:

The Sound Level Calibrator has been calibrated in accordance with the documented procedures and using standard(s) and instrument(s) which are recommended by the manufacturer, or equivalent.

#### **Results:**

| Sound Pressure Level (1kHz) | Measured SPL | Tolerance      |
|-----------------------------|--------------|----------------|
| At 94 dB SPL                | 94.0         | 94.0 ± 0.1 dB  |
| At 114 dB SPL               | 114.0        | 114.0 ± 0.1 dB |

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE

# APPENDIX C WEATHER INFORMATION

# I. General Information

| Date            | Mean Air<br>Temperature (°C) | Mean Relative<br>Humidity (%) | Precipitation (mm) |
|-----------------|------------------------------|-------------------------------|--------------------|
| 1 January 2017  | 18.4 – 20.8                  | 73 – 87                       | 0                  |
| 2 January 2017  | 18.4 – 23.3                  | 62 – 89                       | 0                  |
| 3 January 2017  | 18.9 – 21.3                  | 77 – 91                       | 0                  |
| 4 January 2017  | 18.7 – 21.7                  | 69 – 86                       | 0                  |
| 5 January 2017  | 18.9 – 23.4                  | 70 – 87                       | 0                  |
| 6 January 2017  | 19.7 – 25.0                  | 62 – 89                       | 0                  |
| 7 January 2017  | 19.7 – 22.8                  | 71 – 85                       | 0                  |
| 8 January 2017  | 20.5 – 25.5                  | 64 – 85                       | 0                  |
| 9 January 2017  | 19.7 – 21.8                  | 72 – 82                       | 0                  |
| 10 January 2017 | 18.8 – 20.5                  | 74 – 83                       | 0                  |
| 11 January 2017 | 18.2 – 19.7                  | 76 – 85                       | 0                  |
| 12 January 2017 | 16.9 – 20.3                  | 76 – 86                       | Trace              |
| 13 January 2017 | 15.1 – 17.1                  | 78 – 93                       | 0.5                |
| 14 January 2017 | 14.5 – 16.5                  | 81 – 96                       | 1.0                |
| 15 January 2017 | 14.3 – 16.8                  | 79 – 94                       | 1.5                |
| 16 January 2017 | 14.7 – 17.4                  | 73 – 92                       | 0.4                |
| 17 January 2017 | 16.7 – 19.2                  | 69 – 84                       | 0                  |
| 18 January 2017 | 18.0 – 20.0                  | 81 – 91                       | Trace              |
| 19 January 2017 | 18.7 – 24.1                  | 61 – 87                       | 0                  |

# I. General Information

| Date            | Mean Air<br>Temperature (°C) | Mean Relative<br>Humidity (%) | Precipitation (mm) |
|-----------------|------------------------------|-------------------------------|--------------------|
| 20 January 2017 | 16.2 – 20.6                  | 55 – 86                       | Trace              |
| 21 January 2017 | 14.6 – 19.0                  | 54 – 80                       | 0                  |
| 22 January 2017 | 13.6 – 19.8                  | 44 – 75                       | 0                  |
| 23 January 2017 | 15.2 – 19.4                  | 62 – 81                       | 0                  |
| 24 January 2017 | 15.7 – 18.9                  | 58 – 78                       | 0                  |
| 25 January 2017 | 15.9 – 20.9                  | 65 – 83                       | 0                  |
| 26 January 2017 | 16.2 – 19.8                  | 64 – 84                       | 0                  |
| 27 January 2017 | 14.4 – 21.3                  | 42 – 85                       | 0                  |
| 28 January 2017 | 16.4 – 18.8                  | 68 – 87                       | 0.3                |
| 29 January 2017 | 18.1 – 21.5                  | 77 – 96                       | 2.4                |
| 30 January 2017 | 17.4 – 23.4                  | 79 – 95                       | 1.2                |
| 31 January 2017 | 15.9 – 17.6                  | 83 – 95                       | 0.5                |

<sup>\*</sup> The above information was extracted from the daily weather summary by Hong Kong Observatory.

| Date       | Time  | Wind Speed m/s | Direction |
|------------|-------|----------------|-----------|
| 1-Jan-2017 | 0:00  | 2.5            | S         |
| 1-Jan-2017 | 1:00  | 2.4            | SSE       |
| 1-Jan-2017 | 2:00  | 2.1            | SW        |
| 1-Jan-2017 | 3:00  | 2.2            | SW        |
| 1-Jan-2017 | 4:00  | 1.9            | SW        |
| 1-Jan-2017 | 5:00  | 1.9            | W         |
| 1-Jan-2017 | 6:00  | 2.1            | W         |
| 1-Jan-2017 | 7:00  | 2.5            | NE        |
| 1-Jan-2017 | 8:00  | 2.6            | NE        |
| 1-Jan-2017 | 9:00  | 2.4            | N         |
| 1-Jan-2017 | 10:00 | 2.8            | SSW       |
| 1-Jan-2017 | 11:00 | 2.9            | SW        |
| 1-Jan-2017 | 12:00 | 3.0            | SW        |
| 1-Jan-2017 | 13:00 | 2.9            | SW        |
| 1-Jan-2017 | 14:00 | 2.9            | SW        |
| 1-Jan-2017 | 15:00 | 2.9            | WSW       |
| 1-Jan-2017 | 16:00 | 2.8            | NE        |
| 1-Jan-2017 | 17:00 | 2.4            | NNE       |
| 1-Jan-2017 | 18:00 | 2.0            | SW        |
| 1-Jan-2017 | 19:00 | 1.7            | SSW       |
| 1-Jan-2017 | 20:00 | 2.1            | SW        |
| 1-Jan-2017 | 21:00 | 2.2            | W         |
| 1-Jan-2017 | 22:00 | 2.3            | E         |
| 1-Jan-2017 | 23:00 | 2.1            | W         |
| 2-Jan-2017 | 0:00  | 1.8            | NNE       |
| 2-Jan-2017 | 1:00  | 1.4            | ESE       |
| 2-Jan-2017 | 2:00  | 1.7            | S         |
| 2-Jan-2017 | 3:00  | 1.6            | WSW       |
| 2-Jan-2017 | 4:00  | 1.6            | WNW       |
| 2-Jan-2017 | 5:00  | 0.8            | E         |
| 2-Jan-2017 | 6:00  | 0.8            | Е         |
| 2-Jan-2017 | 7:00  | 0.8            | Е         |
| 2-Jan-2017 | 8:00  | 0.9            | N         |
| 2-Jan-2017 | 9:00  | 0.9            | ENE       |
| 2-Jan-2017 | 10:00 | 1.2            | ENE       |
| 2-Jan-2017 | 11:00 | 1.3            | NE        |

| 2-Jan-2017 | 12:00 | 2.1 | ENE |
|------------|-------|-----|-----|
| 2-Jan-2017 | 13:00 | 2.2 | ENE |
| 2-Jan-2017 | 14:00 | 2.4 | ENE |
| 2-Jan-2017 | 15:00 | 1.7 | ENE |
| 2-Jan-2017 | 16:00 | 1.3 | ESE |
| 2-Jan-2017 | 17:00 | 1.6 | ESE |
| 2-Jan-2017 | 18:00 | 1.3 | ESE |
| 2-Jan-2017 | 19:00 | 1   | Е   |
| 2-Jan-2017 | 20:00 | 1   | SE  |
| 2-Jan-2017 | 21:00 | 1.1 | SE  |
| 2-Jan-2017 | 22:00 | 0.9 | NE  |
| 2-Jan-2017 | 23:00 | 1   | NE  |
| 3-Jan-2017 | 0:00  | 1.1 | NE  |
| 3-Jan-2017 | 1:00  | 1.2 | NE  |
| 3-Jan-2017 | 2:00  | 1.1 | ESE |
| 3-Jan-2017 | 3:00  | 1   | NE  |
| 3-Jan-2017 | 4:00  | 0.9 | NE  |
| 3-Jan-2017 | 5:00  | 1   | NE  |
| 3-Jan-2017 | 6:00  | 0.8 | NNE |
| 3-Jan-2017 | 7:00  | 1.2 | NE  |
| 3-Jan-2017 | 8:00  | 1.4 | NNE |
| 3-Jan-2017 | 9:00  | 1.4 | Е   |
| 3-Jan-2017 | 10:00 | 1.6 | ENE |
| 3-Jan-2017 | 11:00 | 2   | SW  |
| 3-Jan-2017 | 12:00 | 2.5 | S   |
| 3-Jan-2017 | 13:00 | 2.6 | SSW |
| 3-Jan-2017 | 14:00 | 2.7 | N   |
| 3-Jan-2017 | 15:00 | 2.7 | WSW |
| 3-Jan-2017 | 16:00 | 2.7 | SW  |
| 3-Jan-2017 | 17:00 | 2.2 | SW  |
| 3-Jan-2017 | 18:00 | 1.9 | SSW |
| 3-Jan-2017 | 19:00 | 1.9 | W   |
| 3-Jan-2017 | 20:00 | 1.8 | W   |
| 3-Jan-2017 | 21:00 | 1.5 | W   |
| 3-Jan-2017 | 22:00 | 1.6 | WNW |
| 3-Jan-2017 | 23:00 | 1.3 | SSW |
| 4-Jan-2017 | 0:00  | 1.3 | W   |
|            |       |     |     |

| 4-Jan-2017 | 1:00  | 1.6 | W   |
|------------|-------|-----|-----|
| 4-Jan-2017 | 2:00  | 1.7 | SW  |
| 4-Jan-2017 | 3:00  | 1.5 | N   |
| 4-Jan-2017 | 4:00  | 1.4 | NW  |
| 4-Jan-2017 | 5:00  | 1.7 | SW  |
| 4-Jan-2017 | 6:00  | 1.6 | SW  |
| 4-Jan-2017 | 7:00  | 1.5 | WNW |
| 4-Jan-2017 | 8:00  | 1.6 | W   |
| 4-Jan-2017 | 9:00  | 1.8 | W   |
| 4-Jan-2017 | 10:00 | 2.4 | SW  |
| 4-Jan-2017 | 11:00 | 2.8 | SW  |
| 4-Jan-2017 | 12:00 | 2.5 | SW  |
| 4-Jan-2017 | 13:00 | 2.6 | W   |
| 4-Jan-2017 | 14:00 | 2.8 | SW  |
| 4-Jan-2017 | 15:00 | 2.7 | ENE |
| 4-Jan-2017 | 16:00 | 2.2 | NE  |
| 4-Jan-2017 | 17:00 | 2.5 | NE  |
| 4-Jan-2017 | 18:00 | 2   | NE  |
| 4-Jan-2017 | 19:00 | 2.3 | NNE |
| 4-Jan-2017 | 20:00 | 1.9 | NE  |
| 4-Jan-2017 | 21:00 | 2.2 | NE  |
| 4-Jan-2017 | 22:00 | 2.4 | NE  |
| 4-Jan-2017 | 23:00 | 2.4 | E   |
| 5-Jan-2017 | 0:00  | 2.5 | N   |
| 5-Jan-2017 | 1:00  | 2.5 | ENE |
| 5-Jan-2017 | 2:00  | 2.9 | ENE |
| 5-Jan-2017 | 3:00  | 3   | W   |
| 5-Jan-2017 | 4:00  | 3.1 | W   |
| 5-Jan-2017 | 5:00  | 3   | WNW |
| 5-Jan-2017 | 6:00  | 3.2 | NE  |
| 5-Jan-2017 | 7:00  | 2.8 | N   |
| 5-Jan-2017 | 8:00  | 3.1 | N   |
| 5-Jan-2017 | 9:00  | 3.1 | NNE |
| 5-Jan-2017 | 10:00 | 3.1 | NNE |
| 5-Jan-2017 | 11:00 | 2.5 | ENE |
| 5-Jan-2017 | 12:00 | 2.6 | ENE |
| 5-Jan-2017 | 13:00 | 3.3 | ENE |
|            | 1     | 1   |     |

| 5 L 2017   | 11.00 |     | ENIE |
|------------|-------|-----|------|
| 5-Jan-2017 | 14:00 | 3.3 | ENE  |
| 5-Jan-2017 | 15:00 | 3.7 | ENE  |
| 5-Jan-2017 | 16:00 | 3.3 | ENE  |
| 5-Jan-2017 | 17:00 | 3.2 | WNW  |
| 5-Jan-2017 | 18:00 | 3.3 | SW   |
| 5-Jan-2017 | 19:00 | 2.5 | SW   |
| 5-Jan-2017 | 20:00 | 2.7 | SSW  |
| 5-Jan-2017 | 21:00 | 2.9 | WSW  |
| 5-Jan-2017 | 22:00 | 2.9 | WNW  |
| 5-Jan-2017 | 23:00 | 2.4 | WNW  |
| 6-Jan-2017 | 0:00  | 2.6 | WNW  |
| 6-Jan-2017 | 1:00  | 2.9 | WNW  |
| 6-Jan-2017 | 2:00  | 2.1 | WNW  |
| 6-Jan-2017 | 3:00  | 2.1 | WNW  |
| 6-Jan-2017 | 4:00  | 2   | WNW  |
| 6-Jan-2017 | 5:00  | 1.8 | WNW  |
| 6-Jan-2017 | 6:00  | 1.6 | WSW  |
| 6-Jan-2017 | 7:00  | 2   | WSW  |
| 6-Jan-2017 | 8:00  | 2.1 | N    |
| 6-Jan-2017 | 9:00  | 2.6 | ESE  |
| 6-Jan-2017 | 10:00 | 2.6 | SSW  |
| 6-Jan-2017 | 11:00 | 2.8 | W    |
| 6-Jan-2017 | 12:00 | 2.6 | SSW  |
| 6-Jan-2017 | 13:00 | 3   | WSW  |
| 6-Jan-2017 | 14:00 | 2.6 | W    |
| 6-Jan-2017 | 15:00 | 2.6 | WSW  |
| 6-Jan-2017 | 16:00 | 2.4 | W    |
| 6-Jan-2017 | 17:00 | 2.3 | W    |
| 6-Jan-2017 | 18:00 | 2.4 | W    |
| 6-Jan-2017 | 19:00 | 2.5 | W    |
| 6-Jan-2017 | 20:00 | 2.5 | W    |
| 6-Jan-2017 | 21:00 | 2.4 | W    |
| 6-Jan-2017 | 22:00 | 2.5 | SSW  |
| 6-Jan-2017 | 23:00 | 2.2 | SSW  |
| 7-Jan-2017 | 0:00  | 2   | NE   |
| 7-Jan-2017 | 1:00  | 1.9 | SSE  |
| 7-Jan-2017 | 2:00  | 1.6 | NW   |

|            | 1     | <u></u> | T   |
|------------|-------|---------|-----|
| 7-Jan-2017 | 3:00  | 1.7     | NNW |
| 7-Jan-2017 | 4:00  | 1.7     | WNW |
| 7-Jan-2017 | 5:00  | 2.3     | W   |
| 7-Jan-2017 | 6:00  | 1.9     | W   |
| 7-Jan-2017 | 7:00  | 2.2     | W   |
| 7-Jan-2017 | 8:00  | 2.5     | W   |
| 7-Jan-2017 | 9:00  | 2.4     | WNW |
| 7-Jan-2017 | 10:00 | 2.2     | W   |
| 7-Jan-2017 | 11:00 | 2.3     | W   |
| 7-Jan-2017 | 12:00 | 2.7     | WNW |
| 7-Jan-2017 | 13:00 | 2.4     | WSW |
| 7-Jan-2017 | 14:00 | 2.3     | WNW |
| 7-Jan-2017 | 15:00 | 2.6     | SW  |
| 7-Jan-2017 | 16:00 | 2.6     | W   |
| 7-Jan-2017 | 17:00 | 2.1     | W   |
| 7-Jan-2017 | 18:00 | 1.8     | SW  |
| 7-Jan-2017 | 19:00 | 1.4     | NNE |
| 7-Jan-2017 | 20:00 | 1.2     | Е   |
| 7-Jan-2017 | 21:00 | 1.6     | NE  |
| 7-Jan-2017 | 22:00 | 1.8     | NE  |
| 7-Jan-2017 | 23:00 | 1.3     | NE  |
| 8-Jan-2017 | 0:00  | 1.1     | NE  |
| 8-Jan-2017 | 1:00  | 1.3     | ENE |
| 8-Jan-2017 | 2:00  | 1.2     | Е   |
| 8-Jan-2017 | 3:00  | 1       | WSW |
| 8-Jan-2017 | 4:00  | 0.9     | SW  |
| 8-Jan-2017 | 5:00  | 1.2     | ESE |
| 8-Jan-2017 | 6:00  | 1       | NE  |
| 8-Jan-2017 | 7:00  | 1       | SW  |
| 8-Jan-2017 | 8:00  | 1.1     | W   |
| 8-Jan-2017 | 9:00  | 1.5     | WNW |
| 8-Jan-2017 | 10:00 | 2.3     | W   |
| 8-Jan-2017 | 11:00 | 2.2     | W   |
| 8-Jan-2017 | 12:00 | 2.6     | NE  |
| 8-Jan-2017 | 13:00 | 2.5     | WNW |
| 8-Jan-2017 | 14:00 | 2.6     | ENE |
| 8-Jan-2017 | 15:00 | 2.8     | NE  |

|             |       |     | T   |
|-------------|-------|-----|-----|
| 8-Jan-2017  | 16:00 | 2.1 | ENE |
| 8-Jan-2017  | 17:00 | 1.5 | ENE |
| 8-Jan-2017  | 18:00 | 1.6 | SW  |
| 8-Jan-2017  | 19:00 | 1.5 | N   |
| 8-Jan-2017  | 20:00 | 1.2 | N   |
| 8-Jan-2017  | 21:00 | 1.3 | N   |
| 8-Jan-2017  | 22:00 | 1   | N   |
| 8-Jan-2017  | 23:00 | 1.3 | N   |
| 9-Jan-2017  | 0:00  | 1.8 | N   |
| 9-Jan-2017  | 1:00  | 1.4 | NE  |
| 9-Jan-2017  | 2:00  | 1.1 | N   |
| 9-Jan-2017  | 3:00  | 1.2 | NNE |
| 9-Jan-2017  | 4:00  | 1   | N   |
| 9-Jan-2017  | 5:00  | 1.1 | N   |
| 9-Jan-2017  | 6:00  | 1   | NNW |
| 9-Jan-2017  | 7:00  | 0.9 | W   |
| 9-Jan-2017  | 8:00  | 1.1 | WSW |
| 9-Jan-2017  | 9:00  | 2.1 | N   |
| 9-Jan-2017  | 10:00 | 2.8 | N   |
| 9-Jan-2017  | 11:00 | 2.5 | N   |
| 9-Jan-2017  | 12:00 | 2.5 | N   |
| 9-Jan-2017  | 13:00 | 2.3 | N   |
| 9-Jan-2017  | 14:00 | 2.1 | NNE |
| 9-Jan-2017  | 15:00 | 2.1 | N   |
| 9-Jan-2017  | 16:00 | 2   | N   |
| 9-Jan-2017  | 17:00 | 1.9 | ENE |
| 9-Jan-2017  | 18:00 | 1.6 | NE  |
| 9-Jan-2017  | 19:00 | 1.3 | W   |
| 9-Jan-2017  | 20:00 | 0.9 | NNE |
| 9-Jan-2017  | 21:00 | 1   | WSW |
| 9-Jan-2017  | 22:00 | 1   | W   |
| 9-Jan-2017  | 23:00 | 1.1 | NE  |
| 10-Jan-2017 | 0:00  | 1.2 | NNE |
| 10-Jan-2017 | 1:00  | 1.7 | N   |
| 10-Jan-2017 | 2:00  | 1.9 | N   |
| 10-Jan-2017 | 3:00  | 1.5 | NNE |
| 10-Jan-2017 | 4:00  | 1.8 | N   |
|             |       |     |     |

| 10-Jan-2017 | 5:00  | 2.1 | N   |
|-------------|-------|-----|-----|
| 10-Jan-2017 | 6:00  | 2.3 | NNE |
| 10-Jan-2017 | 7:00  | 2.4 | NE  |
| 10-Jan-2017 | 8:00  | 2.5 | N   |
| 10-Jan-2017 | 9:00  | 2.3 | E   |
| 10-Jan-2017 | 10:00 | 2.5 | SW  |
| 10-Jan-2017 | 11:00 | 2.4 | ENE |
| 10-Jan-2017 | 12:00 | 2.4 | NE  |
| 10-Jan-2017 | 13:00 | 2.6 | NE  |
| 10-Jan-2017 | 14:00 | 2.6 | ENE |
| 10-Jan-2017 | 15:00 | 2.5 | NE  |
| 10-Jan-2017 | 16:00 | 2.5 | NE  |
| 10-Jan-2017 | 17:00 | 2.7 | ENE |
| 10-Jan-2017 | 18:00 | 2.3 | ENE |
| 10-Jan-2017 | 19:00 | 2.1 | N   |
| 10-Jan-2017 | 20:00 | 1.9 | NE  |
| 10-Jan-2017 | 21:00 | 1.6 | NNE |
| 10-Jan-2017 | 22:00 | 1.1 | WSW |
| 10-Jan-2017 | 23:00 | 1.6 | W   |
| 11-Jan-2017 | 0:00  | 2.2 | W   |
| 11-Jan-2017 | 1:00  | 1.9 | WNW |
| 11-Jan-2017 | 2:00  | 2.3 | ESE |
| 11-Jan-2017 | 3:00  | 1.2 | WSW |
| 11-Jan-2017 | 4:00  | 1.2 | NE  |
| 11-Jan-2017 | 5:00  | 2.3 | NW  |
| 11-Jan-2017 | 6:00  | 2.1 | NNE |
| 11-Jan-2017 | 7:00  | 1.6 | NE  |
| 11-Jan-2017 | 8:00  | 1.7 | N   |
| 11-Jan-2017 | 9:00  | 2   | SSW |
| 11-Jan-2017 | 10:00 | 2.2 | ESE |
| 11-Jan-2017 | 11:00 | 2.6 | ESE |
| 11-Jan-2017 | 12:00 | 3.3 | W   |
| 11-Jan-2017 | 13:00 | 2.9 | WNW |
| 11-Jan-2017 | 14:00 | 2.7 | SSE |
| 11-Jan-2017 | 15:00 | 2.9 | NW  |
| 11-Jan-2017 | 16:00 | 2.8 | WNW |
| 11-Jan-2017 | 17:00 | 2.9 | WSW |
|             |       |     |     |

| 11-Jan-2017 | 18:00 | 2.3 | W   |
|-------------|-------|-----|-----|
| 11-Jan-2017 | 19:00 | 1.3 | W   |
| 11-Jan-2017 | 20:00 | 2   | W   |
| 11-Jan-2017 | 21:00 | 2.3 | WSW |
| 11-Jan-2017 | 22:00 | 1.8 | SSE |
| 11-Jan-2017 | 23:00 | 1.7 | W   |
| 12-Jan-2017 | 0:00  | 1.5 | W   |
| 12-Jan-2017 | 1:00  | 1.6 | W   |
| 12-Jan-2017 | 2:00  | 1.3 | WNW |
| 12-Jan-2017 | 3:00  | 1.4 | WNW |
| 12-Jan-2017 | 4:00  | 1.1 | WNW |
| 12-Jan-2017 | 5:00  | 1.2 | W   |
| 12-Jan-2017 | 6:00  | 0.8 | W   |
| 12-Jan-2017 | 7:00  | 0.7 | W   |
| 12-Jan-2017 | 8:00  | 1   | WSW |
| 12-Jan-2017 | 9:00  | 1   | WSW |
| 12-Jan-2017 | 10:00 | 1.7 | WSW |
| 12-Jan-2017 | 11:00 | 2.2 | NNE |
| 12-Jan-2017 | 12:00 | 2.4 | SSE |
| 12-Jan-2017 | 13:00 | 2.5 | NE  |
| 12-Jan-2017 | 14:00 | 2.3 | NE  |
| 12-Jan-2017 | 15:00 | 2   | ESE |
| 12-Jan-2017 | 16:00 | 2   | ENE |
| 12-Jan-2017 | 17:00 | 2.2 | ENE |
| 12-Jan-2017 | 18:00 | 1.8 | NNE |
| 12-Jan-2017 | 19:00 | 1.6 | NNE |
| 12-Jan-2017 | 20:00 | 1.1 | NNE |
| 12-Jan-2017 | 21:00 | 0.9 | NNE |
| 12-Jan-2017 | 22:00 | 0.8 | ENE |
| 12-Jan-2017 | 23:00 | 0.9 | ENE |
| 13-Jan-2017 | 0:00  | 0.8 | ENE |
| 13-Jan-2017 | 1:00  | 0.8 | SSE |
| 13-Jan-2017 | 2:00  | 0.9 | NE  |
| 13-Jan-2017 | 3:00  | 0.8 | ENE |
| 13-Jan-2017 | 4:00  | 0.8 | ENE |
| 13-Jan-2017 | 5:00  | 0.8 | ENE |
| 13-Jan-2017 | 6:00  | 0.9 | ENE |

| 13-Jan-2017         7:00         0.8         ENE           13-Jan-2017         8:00         0.9         ESE           13-Jan-2017         9:00         1.3         ESE           13-Jan-2017         10:00         1.7         ENE           13-Jan-2017         11:00         1.6         ENE           13-Jan-2017         12:00         2.3         NNE           13-Jan-2017         13:00         2.2         NNE           13-Jan-2017         15:00         2.4         NE           13-Jan-2017         15:00         2.4         NNE           13-Jan-2017         16:00         2.2         SSE           13-Jan-2017         16:00         2.2         SSE           13-Jan-2017         18:00         1.7         E           13-Jan-2017         19:00         1.4         NNE           13-Jan-2017         20:00         0.9         ENE           13-Jan-2017         21:00         1.1         ENE           13-Jan-2017         20:00         0.8         NE           13-Jan-2017         20:00         0.8         NE           13-Jan-2017         20:00         0.9         ENE           <                                                             |             |       |     |     |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------|-----|-----|
| 13-Jan-2017         9:00         1.3         ESE           13-Jan-2017         10:00         1.7         ENE           13-Jan-2017         11:00         1.6         ENE           13-Jan-2017         12:00         2.3         NNE           13-Jan-2017         13:00         2.2         NNE           13-Jan-2017         14:00         2.4         NE           13-Jan-2017         15:00         2.4         NNE           13-Jan-2017         16:00         2.2         SSE           13-Jan-2017         17:00         2.1         ESE           13-Jan-2017         18:00         1.7         E           13-Jan-2017         19:00         1.4         NNE           13-Jan-2017         20:00         0.9         ENE           13-Jan-2017         20:00         0.9         ENE           13-Jan-2017         20:00         0.8         NE           13-Jan-2017         20:00         0.8         NE           13-Jan-2017         20:00         0.8         NE           14-Jan-2017         0:00         1         NNE           14-Jan-2017         0:00         1         NNE           14                                                                 | 13-Jan-2017 | 7:00  | 0.8 | ENE |
| 13-Jan-2017         10:00         1.7         ENE           13-Jan-2017         11:00         1.6         ENE           13-Jan-2017         12:00         2.3         NNE           13-Jan-2017         13:00         2.2         NNE           13-Jan-2017         14:00         2.4         NE           13-Jan-2017         15:00         2.4         NNE           13-Jan-2017         16:00         2.2         SSE           13-Jan-2017         16:00         2.2         SSE           13-Jan-2017         18:00         1.7         E           13-Jan-2017         19:00         1.4         NNE           13-Jan-2017         20:00         0.9         ENE           13-Jan-2017         20:00         0.9         ENE           13-Jan-2017         20:00         0.8         NE           13-Jan-2017         20:00         0.8         NE           13-Jan-2017         20:00         0.9         ENE           14-Jan-2017         0:00         1         NNE           14-Jan-2017         0:00         1         NNE           14-Jan-2017         2:00         0.9         SSE           1                                                                 | 13-Jan-2017 | 8:00  | 0.9 | ESE |
| 13-Jan-2017         11:00         1.6         ENE           13-Jan-2017         12:00         2.3         NNE           13-Jan-2017         13:00         2.2         NNE           13-Jan-2017         14:00         2.4         NE           13-Jan-2017         15:00         2.4         NNE           13-Jan-2017         16:00         2.2         SSE           13-Jan-2017         17:00         2.1         ESE           13-Jan-2017         18:00         1.7         E           13-Jan-2017         19:00         1.4         NNE           13-Jan-2017         20:00         0.9         ENE           13-Jan-2017         20:00         0.9         ENE           13-Jan-2017         20:00         0.8         NE           13-Jan-2017         20:00         0.9         ENE           14-Jan-2017         1:00         0.9         ENE <t< td=""><td>13-Jan-2017</td><td>9:00</td><td>1.3</td><td>ESE</td></t<> | 13-Jan-2017 | 9:00  | 1.3 | ESE |
| 13-Jan-2017         12:00         2.3         NNE           13-Jan-2017         13:00         2.2         NNE           13-Jan-2017         14:00         2.4         NE           13-Jan-2017         15:00         2.4         NNE           13-Jan-2017         16:00         2.2         SSE           13-Jan-2017         17:00         2.1         ESE           13-Jan-2017         18:00         1.7         E           13-Jan-2017         19:00         1.4         NNE           13-Jan-2017         20:00         0.9         ENE           13-Jan-2017         21:00         1.1         ENE           13-Jan-2017         22:00         0.8         NE           13-Jan-2017         22:00         0.8         NE           13-Jan-2017         23:00         0.9         ENE           14-Jan-2017         0:00         1         NNE           14-Jan-2017         1:00         0.9         SE           14-Jan-2017         1:00         0.9         SE           14-Jan-2017         3:00         1         S           14-Jan-2017         4:00         0.7         ESE           14-Jan-                                                                 | 13-Jan-2017 | 10:00 | 1.7 | ENE |
| 13-Jan-2017         13:00         2.2         NNE           13-Jan-2017         14:00         2.4         NE           13-Jan-2017         15:00         2.4         NNE           13-Jan-2017         16:00         2.2         SSE           13-Jan-2017         17:00         2.1         ESE           13-Jan-2017         18:00         1.7         E           13-Jan-2017         19:00         1.4         NNE           13-Jan-2017         20:00         0.9         ENE           13-Jan-2017         21:00         1.1         ENE           13-Jan-2017         22:00         0.8         NE           13-Jan-2017         22:00         0.8         NE           13-Jan-2017         23:00         0.9         ENE           14-Jan-2017         0:00         1         NNE           14-Jan-2017         1:00         0.9         ENE           14-Jan-2017         1:00         0.9         SSE           14-Jan-2017         3:00         1         S           14-Jan-2017         4:00         0.7         ESE           14-Jan-2017         5:00         0.8         SE           14-Jan-                                                                 | 13-Jan-2017 | 11:00 | 1.6 | ENE |
| 13-Jan-2017         14:00         2.4         NE           13-Jan-2017         15:00         2.4         NNE           13-Jan-2017         16:00         2.2         SSE           13-Jan-2017         17:00         2.1         ESE           13-Jan-2017         18:00         1.7         E           13-Jan-2017         19:00         1.4         NNE           13-Jan-2017         20:00         0.9         ENE           13-Jan-2017         21:00         1.1         ENE           13-Jan-2017         22:00         0.8         NE           13-Jan-2017         23:00         0.9         ENE           14-Jan-2017         0:00         1         NNE           14-Jan-2017         1:00         0.9         ENE           14-Jan-2017         1:00         0.9         ENE           14-Jan-2017         1:00         0.9         ENE           14-Jan-2017         3:00         1         S           14-Jan-2017         4:00         0.7         ESE           14-Jan-2017         5:00         0.8         SE           14-Jan-2017         7:00         0.7         SSE           14-Jan-2                                                                 | 13-Jan-2017 | 12:00 | 2.3 | NNE |
| 13-Jan-2017         15:00         2.4         NNE           13-Jan-2017         16:00         2.2         SSE           13-Jan-2017         17:00         2.1         ESE           13-Jan-2017         18:00         1.7         E           13-Jan-2017         19:00         1.4         NNE           13-Jan-2017         20:00         0.9         ENE           13-Jan-2017         21:00         1.1         ENE           13-Jan-2017         22:00         0.8         NE           13-Jan-2017         23:00         0.9         ENE           14-Jan-2017         0:00         1         NNE           14-Jan-2017         1:00         0.9         ENE           14-Jan-2017         1:00         0.9         ENE           14-Jan-2017         1:00         0.9         SSE           14-Jan-2017         3:00         1         S           14-Jan-2017         4:00         0.7         ESE           14-Jan-2017         5:00         0.6         SSW           14-Jan-2017         7:00         0.7         SSE           14-Jan-2017         9:00         1.3         S           14-Jan-20                                                                 | 13-Jan-2017 | 13:00 | 2.2 | NNE |
| 13-Jan-2017         16:00         2.2         SSE           13-Jan-2017         17:00         2.1         ESE           13-Jan-2017         18:00         1.7         E           13-Jan-2017         19:00         1.4         NNE           13-Jan-2017         20:00         0.9         ENE           13-Jan-2017         21:00         1.1         ENE           13-Jan-2017         22:00         0.8         NE           13-Jan-2017         23:00         0.9         ENE           14-Jan-2017         0:00         1         NNE           14-Jan-2017         0:00         1         NNE           14-Jan-2017         1:00         0.9         ENE           14-Jan-2017         2:00         0.9         ENE           14-Jan-2017         3:00         1         S           14-Jan-2017         3:00         1         S           14-Jan-2017         4:00         0.7         ESE           14-Jan-2017         5:00         0.8         SE           14-Jan-2017         7:00         0.7         SSE           14-Jan-2017         7:00         0.7         SSE           14-Jan-2017 <td>13-Jan-2017</td> <td>14:00</td> <td>2.4</td> <td>NE</td>        | 13-Jan-2017 | 14:00 | 2.4 | NE  |
| 13-Jan-2017         17:00         2.1         ESE           13-Jan-2017         18:00         1.7         E           13-Jan-2017         19:00         1.4         NNE           13-Jan-2017         20:00         0.9         ENE           13-Jan-2017         21:00         1.1         ENE           13-Jan-2017         22:00         0.8         NE           13-Jan-2017         23:00         0.9         ENE           14-Jan-2017         0:00         1         NNE           14-Jan-2017         1:00         0.9         ENE           14-Jan-2017         1:00         0.9         ENE           14-Jan-2017         2:00         0.9         SSE           14-Jan-2017         3:00         1         S           14-Jan-2017         4:00         0.7         ESE           14-Jan-2017         5:00         0.8         SE           14-Jan-2017         6:00         0.6         SSW           14-Jan-2017         7:00         0.7         SSE           14-Jan-2017         10:00         2.1         SSW           14-Jan-2017         10:00         2.1         SSW           14-Jan-2                                                                 | 13-Jan-2017 | 15:00 | 2.4 | NNE |
| 13-Jan-2017         18:00         1.7         E           13-Jan-2017         19:00         1.4         NNE           13-Jan-2017         20:00         0.9         ENE           13-Jan-2017         21:00         1.1         ENE           13-Jan-2017         22:00         0.8         NE           13-Jan-2017         23:00         0.9         ENE           14-Jan-2017         0:00         1         NNE           14-Jan-2017         1:00         0.9         ENE           14-Jan-2017         1:00         0.9         SE           14-Jan-2017         3:00         1         S           14-Jan-2017         3:00         1         S           14-Jan-2017         4:00         0.7         ESE           14-Jan-2017         5:00         0.8         SE           14-Jan-2017         6:00         0.6         SSW           14-Jan-2017         8:00         1         SSE           14-Jan-2017         10:00         2.1         SSW           14-Jan-2017         10:00         2.1         SSW           14-Jan-2017         12:00         2.9         SW           14-Jan-2017                                                                      | 13-Jan-2017 | 16:00 | 2.2 | SSE |
| 13-Jan-2017         19:00         1.4         NNE           13-Jan-2017         20:00         0.9         ENE           13-Jan-2017         21:00         1.1         ENE           13-Jan-2017         22:00         0.8         NE           13-Jan-2017         23:00         0.9         ENE           14-Jan-2017         0:00         1         NNE           14-Jan-2017         1:00         0.9         ENE           14-Jan-2017         2:00         0.9         SSE           14-Jan-2017         3:00         1         S           14-Jan-2017         4:00         0.7         ESE           14-Jan-2017         5:00         0.8         SE           14-Jan-2017         5:00         0.6         SSW           14-Jan-2017         7:00         0.7         SSE           14-Jan-2017         8:00         1         SSE           14-Jan-2017         10:00         2.1         SSW           14-Jan-2017         10:00         2.1         SSW           14-Jan-2017         12:00         2.9         SW           14-Jan-2017         14:00         2.6         ENE           14-Jan-20                                                                 | 13-Jan-2017 | 17:00 | 2.1 | ESE |
| 13-Jan-2017         20:00         0.9         ENE           13-Jan-2017         21:00         1.1         ENE           13-Jan-2017         22:00         0.8         NE           13-Jan-2017         23:00         0.9         ENE           14-Jan-2017         0:00         1         NNE           14-Jan-2017         1:00         0.9         ENE           14-Jan-2017         2:00         0.9         SSE           14-Jan-2017         3:00         1         S           14-Jan-2017         4:00         0.7         ESE           14-Jan-2017         5:00         0.8         SE           14-Jan-2017         6:00         0.6         SSW           14-Jan-2017         7:00         0.7         SSE           14-Jan-2017         8:00         1         SSE           14-Jan-2017         10:00         2.1         SSW           14-Jan-2017         10:00         2.1         SSW           14-Jan-2017         12:00         2.9         SW           14-Jan-2017         13:00         2.4         ESE           14-Jan-2017         15:00         2.9         NNW           14-Jan-20                                                                 | 13-Jan-2017 | 18:00 | 1.7 | Е   |
| 13-Jan-2017         21:00         1.1         ENE           13-Jan-2017         22:00         0.8         NE           13-Jan-2017         23:00         0.9         ENE           14-Jan-2017         0:00         1         NNE           14-Jan-2017         1:00         0.9         ENE           14-Jan-2017         2:00         0.9         SSE           14-Jan-2017         3:00         1         S           14-Jan-2017         4:00         0.7         ESE           14-Jan-2017         5:00         0.8         SE           14-Jan-2017         6:00         0.6         SSW           14-Jan-2017         7:00         0.7         SSE           14-Jan-2017         8:00         1         SSE           14-Jan-2017         9:00         1.3         S           14-Jan-2017         10:00         2.1         SSW           14-Jan-2017         11:00         2.3         SSW           14-Jan-2017         13:00         2.4         ESE           14-Jan-2017         14:00         2.6         ENE           14-Jan-2017         16:00         2.1         ENE           14-Jan-2017                                                                 | 13-Jan-2017 | 19:00 | 1.4 | NNE |
| 13-Jan-2017         22:00         0.8         NE           13-Jan-2017         23:00         0.9         ENE           14-Jan-2017         0:00         1         NNE           14-Jan-2017         1:00         0.9         ENE           14-Jan-2017         2:00         0.9         SSE           14-Jan-2017         2:00         0.9         SSE           14-Jan-2017         3:00         1         S           14-Jan-2017         4:00         0.7         ESE           14-Jan-2017         5:00         0.8         SE           14-Jan-2017         6:00         0.6         SSW           14-Jan-2017         8:00         1         SSE           14-Jan-2017         9:00         1.3         S           14-Jan-2017         10:00         2.1         SSW           14-Jan-2017         11:00         2.3         SSW           14-Jan-2017         12:00         2.9         SW           14-Jan-2017         14:00         2.6         ENE           14-Jan-2017         15:00         2.9         NNW           14-Jan-2017         16:00         2.1         ENE           14-Jan-2017<                                                                 | 13-Jan-2017 | 20:00 | 0.9 | ENE |
| 13-Jan-2017         23:00         0.9         ENE           14-Jan-2017         0:00         1         NNE           14-Jan-2017         1:00         0.9         ENE           14-Jan-2017         2:00         0.9         SSE           14-Jan-2017         3:00         1         S           14-Jan-2017         4:00         0.7         ESE           14-Jan-2017         5:00         0.8         SE           14-Jan-2017         6:00         0.6         SSW           14-Jan-2017         8:00         1         SSE           14-Jan-2017         9:00         1.3         S           14-Jan-2017         10:00         2.1         SSW           14-Jan-2017         11:00         2.3         SSW           14-Jan-2017         12:00         2.9         SW           14-Jan-2017         14:00         2.6         ENE           14-Jan-2017         15:00         2.9         NNW           14-Jan-2017         16:00         2.1         ENE           14-Jan-2017         16:00         2.1         ENE           14-Jan-2017         16:00         1.8         ENE           14-Jan-201                                                                 | 13-Jan-2017 | 21:00 | 1.1 | ENE |
| 14-Jan-2017         0:00         1         NNE           14-Jan-2017         1:00         0.9         ENE           14-Jan-2017         2:00         0.9         SSE           14-Jan-2017         3:00         1         S           14-Jan-2017         4:00         0.7         ESE           14-Jan-2017         5:00         0.8         SE           14-Jan-2017         6:00         0.6         SSW           14-Jan-2017         7:00         0.7         SSE           14-Jan-2017         8:00         1         SSE           14-Jan-2017         9:00         1.3         S           14-Jan-2017         10:00         2.1         SSW           14-Jan-2017         11:00         2.3         SSW           14-Jan-2017         12:00         2.9         SW           14-Jan-2017         13:00         2.4         ESE           14-Jan-2017         15:00         2.9         NNW           14-Jan-2017         16:00         2.1         ENE           14-Jan-2017         16:00         2.1         ENE           14-Jan-2017         16:00         1.8         ENE           14-Jan-2017                                                                 | 13-Jan-2017 | 22:00 | 0.8 | NE  |
| 14-Jan-2017         1:00         0.9         ENE           14-Jan-2017         2:00         0.9         SSE           14-Jan-2017         3:00         1         S           14-Jan-2017         4:00         0.7         ESE           14-Jan-2017         5:00         0.8         SE           14-Jan-2017         6:00         0.6         SSW           14-Jan-2017         7:00         0.7         SSE           14-Jan-2017         8:00         1         SSE           14-Jan-2017         9:00         1.3         S           14-Jan-2017         10:00         2.1         SSW           14-Jan-2017         11:00         2.3         SSW           14-Jan-2017         12:00         2.9         SW           14-Jan-2017         14:00         2.4         ESE           14-Jan-2017         15:00         2.9         NNW           14-Jan-2017         16:00         2.1         ENE           14-Jan-2017         16:00         2.1         ENE           14-Jan-2017         16:00         1.8         ENE           14-Jan-2017         16:00         1.8         ENE                                                                                    | 13-Jan-2017 | 23:00 | 0.9 | ENE |
| 14-Jan-2017       2:00       0.9       SSE         14-Jan-2017       3:00       1       S         14-Jan-2017       4:00       0.7       ESE         14-Jan-2017       5:00       0.8       SE         14-Jan-2017       6:00       0.6       SSW         14-Jan-2017       7:00       0.7       SSE         14-Jan-2017       8:00       1       SSE         14-Jan-2017       9:00       1.3       S         14-Jan-2017       10:00       2.1       SSW         14-Jan-2017       11:00       2.3       SSW         14-Jan-2017       12:00       2.9       SW         14-Jan-2017       13:00       2.4       ESE         14-Jan-2017       14:00       2.6       ENE         14-Jan-2017       15:00       2.9       NNW         14-Jan-2017       16:00       2.1       ENE         14-Jan-2017       17:00       1.8       ENE         14-Jan-2017       18:00       1.7       ENE                                                                                                                                                                                                                                                                                     | 14-Jan-2017 | 0:00  | 1   | NNE |
| 14-Jan-2017       3:00       1       S         14-Jan-2017       4:00       0.7       ESE         14-Jan-2017       5:00       0.8       SE         14-Jan-2017       6:00       0.6       SSW         14-Jan-2017       7:00       0.7       SSE         14-Jan-2017       8:00       1       SSE         14-Jan-2017       9:00       1.3       S         14-Jan-2017       10:00       2.1       SSW         14-Jan-2017       11:00       2.3       SSW         14-Jan-2017       12:00       2.9       SW         14-Jan-2017       13:00       2.4       ESE         14-Jan-2017       14:00       2.6       ENE         14-Jan-2017       15:00       2.9       NNW         14-Jan-2017       16:00       2.1       ENE         14-Jan-2017       17:00       1.8       ENE         14-Jan-2017       18:00       1.7       ENE                                                                                                                                                                                                                                                                                                                                        | 14-Jan-2017 | 1:00  | 0.9 | ENE |
| 14-Jan-2017       4:00       0.7       ESE         14-Jan-2017       5:00       0.8       SE         14-Jan-2017       6:00       0.6       SSW         14-Jan-2017       7:00       0.7       SSE         14-Jan-2017       8:00       1       SSE         14-Jan-2017       9:00       1.3       S         14-Jan-2017       10:00       2.1       SSW         14-Jan-2017       11:00       2.3       SSW         14-Jan-2017       12:00       2.9       SW         14-Jan-2017       13:00       2.4       ESE         14-Jan-2017       14:00       2.6       ENE         14-Jan-2017       15:00       2.9       NNW         14-Jan-2017       16:00       2.1       ENE         14-Jan-2017       17:00       1.8       ENE         14-Jan-2017       18:00       1.7       ENE                                                                                                                                                                                                                                                                                                                                                                                       | 14-Jan-2017 | 2:00  | 0.9 | SSE |
| 14-Jan-2017       5:00       0.8       SE         14-Jan-2017       6:00       0.6       SSW         14-Jan-2017       7:00       0.7       SSE         14-Jan-2017       8:00       1       SSE         14-Jan-2017       9:00       1.3       S         14-Jan-2017       10:00       2.1       SSW         14-Jan-2017       11:00       2.3       SSW         14-Jan-2017       12:00       2.9       SW         14-Jan-2017       13:00       2.4       ESE         14-Jan-2017       14:00       2.6       ENE         14-Jan-2017       15:00       2.9       NNW         14-Jan-2017       16:00       2.1       ENE         14-Jan-2017       17:00       1.8       ENE         14-Jan-2017       18:00       1.7       ENE                                                                                                                                                                                                                                                                                                                                                                                                                                          | 14-Jan-2017 | 3:00  | 1   | S   |
| 14-Jan-2017       6:00       0.6       SSW         14-Jan-2017       7:00       0.7       SSE         14-Jan-2017       8:00       1       SSE         14-Jan-2017       9:00       1.3       S         14-Jan-2017       10:00       2.1       SSW         14-Jan-2017       11:00       2.3       SSW         14-Jan-2017       12:00       2.9       SW         14-Jan-2017       13:00       2.4       ESE         14-Jan-2017       14:00       2.6       ENE         14-Jan-2017       15:00       2.9       NNW         14-Jan-2017       16:00       2.1       ENE         14-Jan-2017       17:00       1.8       ENE         14-Jan-2017       18:00       1.7       ENE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 14-Jan-2017 | 4:00  | 0.7 | ESE |
| 14-Jan-2017       7:00       0.7       SSE         14-Jan-2017       8:00       1       SSE         14-Jan-2017       9:00       1.3       S         14-Jan-2017       10:00       2.1       SSW         14-Jan-2017       11:00       2.3       SSW         14-Jan-2017       12:00       2.9       SW         14-Jan-2017       13:00       2.4       ESE         14-Jan-2017       14:00       2.6       ENE         14-Jan-2017       15:00       2.9       NNW         14-Jan-2017       16:00       2.1       ENE         14-Jan-2017       17:00       1.8       ENE         14-Jan-2017       18:00       1.7       ENE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 14-Jan-2017 | 5:00  | 8.0 | SE  |
| 14-Jan-2017       8:00       1       SSE         14-Jan-2017       9:00       1.3       S         14-Jan-2017       10:00       2.1       SSW         14-Jan-2017       11:00       2.3       SSW         14-Jan-2017       12:00       2.9       SW         14-Jan-2017       13:00       2.4       ESE         14-Jan-2017       14:00       2.6       ENE         14-Jan-2017       15:00       2.9       NNW         14-Jan-2017       16:00       2.1       ENE         14-Jan-2017       17:00       1.8       ENE         14-Jan-2017       18:00       1.7       ENE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 14-Jan-2017 | 6:00  | 0.6 | SSW |
| 14-Jan-2017       9:00       1.3       S         14-Jan-2017       10:00       2.1       SSW         14-Jan-2017       11:00       2.3       SSW         14-Jan-2017       12:00       2.9       SW         14-Jan-2017       13:00       2.4       ESE         14-Jan-2017       14:00       2.6       ENE         14-Jan-2017       15:00       2.9       NNW         14-Jan-2017       16:00       2.1       ENE         14-Jan-2017       17:00       1.8       ENE         14-Jan-2017       18:00       1.7       ENE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 14-Jan-2017 | 7:00  | 0.7 | SSE |
| 14-Jan-2017       10:00       2.1       SSW         14-Jan-2017       11:00       2.3       SSW         14-Jan-2017       12:00       2.9       SW         14-Jan-2017       13:00       2.4       ESE         14-Jan-2017       14:00       2.6       ENE         14-Jan-2017       15:00       2.9       NNW         14-Jan-2017       16:00       2.1       ENE         14-Jan-2017       17:00       1.8       ENE         14-Jan-2017       18:00       1.7       ENE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 14-Jan-2017 | 8:00  | 1   | SSE |
| 14-Jan-2017       11:00       2.3       SSW         14-Jan-2017       12:00       2.9       SW         14-Jan-2017       13:00       2.4       ESE         14-Jan-2017       14:00       2.6       ENE         14-Jan-2017       15:00       2.9       NNW         14-Jan-2017       16:00       2.1       ENE         14-Jan-2017       17:00       1.8       ENE         14-Jan-2017       18:00       1.7       ENE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 14-Jan-2017 | 9:00  | 1.3 | S   |
| 14-Jan-2017       12:00       2.9       SW         14-Jan-2017       13:00       2.4       ESE         14-Jan-2017       14:00       2.6       ENE         14-Jan-2017       15:00       2.9       NNW         14-Jan-2017       16:00       2.1       ENE         14-Jan-2017       17:00       1.8       ENE         14-Jan-2017       18:00       1.7       ENE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 14-Jan-2017 | 10:00 | 2.1 | SSW |
| 14-Jan-2017       13:00       2.4       ESE         14-Jan-2017       14:00       2.6       ENE         14-Jan-2017       15:00       2.9       NNW         14-Jan-2017       16:00       2.1       ENE         14-Jan-2017       17:00       1.8       ENE         14-Jan-2017       18:00       1.7       ENE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 14-Jan-2017 | 11:00 | 2.3 | SSW |
| 14-Jan-2017       14:00       2.6       ENE         14-Jan-2017       15:00       2.9       NNW         14-Jan-2017       16:00       2.1       ENE         14-Jan-2017       17:00       1.8       ENE         14-Jan-2017       18:00       1.7       ENE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 14-Jan-2017 | 12:00 | 2.9 | SW  |
| 14-Jan-2017     15:00     2.9     NNW       14-Jan-2017     16:00     2.1     ENE       14-Jan-2017     17:00     1.8     ENE       14-Jan-2017     18:00     1.7     ENE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 14-Jan-2017 | 13:00 | 2.4 | ESE |
| 14-Jan-2017     16:00     2.1     ENE       14-Jan-2017     17:00     1.8     ENE       14-Jan-2017     18:00     1.7     ENE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 14-Jan-2017 | 14:00 | 2.6 | ENE |
| 14-Jan-2017 17:00 1.8 ENE<br>14-Jan-2017 18:00 1.7 ENE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 14-Jan-2017 | 15:00 | 2.9 | NNW |
| 14-Jan-2017 18:00 1.7 ENE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 14-Jan-2017 | 16:00 | 2.1 | ENE |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 14-Jan-2017 | 17:00 | 1.8 | ENE |
| 14-Jan-2017 19:00 1.6 SSE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 14-Jan-2017 | 18:00 | 1.7 | ENE |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 14-Jan-2017 | 19:00 | 1.6 | SSE |

|             | T     |     |     |
|-------------|-------|-----|-----|
| 14-Jan-2017 | 20:00 | 1.4 | ESE |
| 14-Jan-2017 | 21:00 | 1.9 | SE  |
| 14-Jan-2017 | 22:00 | 1.5 | ENE |
| 14-Jan-2017 | 23:00 | 0.9 | SSE |
| 15-Jan-2017 | 0:00  | 1.3 | E   |
| 15-Jan-2017 | 1:00  | 0.9 | ESE |
| 15-Jan-2017 | 2:00  | 1.1 | ENE |
| 15-Jan-2017 | 3:00  | 1.4 | N   |
| 15-Jan-2017 | 4:00  | 1.4 | ENE |
| 15-Jan-2017 | 5:00  | 1.6 | ENE |
| 15-Jan-2017 | 6:00  | 1.9 | NE  |
| 15-Jan-2017 | 7:00  | 1.9 | NE  |
| 15-Jan-2017 | 8:00  | 1.8 | ENE |
| 15-Jan-2017 | 9:00  | 2.4 | SE  |
| 15-Jan-2017 | 10:00 | 2.6 | SSE |
| 15-Jan-2017 | 11:00 | 2.7 | Е   |
| 15-Jan-2017 | 12:00 | 3   | ESE |
| 15-Jan-2017 | 13:00 | 2.8 | Е   |
| 15-Jan-2017 | 14:00 | 2.5 | SE  |
| 15-Jan-2017 | 15:00 | 2.6 | S   |
| 15-Jan-2017 | 16:00 | 3   | S   |
| 15-Jan-2017 | 17:00 | 2.6 | SSE |
| 15-Jan-2017 | 18:00 | 2.3 | ESE |
| 15-Jan-2017 | 19:00 | 2   | SE  |
| 15-Jan-2017 | 20:00 | 1.6 | SE  |
| 15-Jan-2017 | 21:00 | 1.3 | SSE |
| 15-Jan-2017 | 22:00 | 1.6 | SSE |
| 15-Jan-2017 | 23:00 | 1.3 | SSE |
| 16-Jan-2017 | 0:00  | 1.1 | SSE |
| 16-Jan-2017 | 1:00  | 1.2 | Е   |
| 16-Jan-2017 | 2:00  | 1   | Е   |
| 16-Jan-2017 | 3:00  | 0.9 | Е   |
| 16-Jan-2017 | 4:00  | 1.1 | Е   |
| 16-Jan-2017 | 5:00  | 1.4 | E   |
| 16-Jan-2017 | 6:00  | 0.8 | Е   |
| 16-Jan-2017 | 7:00  | 1.2 | Е   |
| 16-Jan-2017 | 8:00  | 1.1 | NE  |
|             |       | •   | •   |

| 16-Jan-2017     9:00     1.8     NE       16-Jan-2017     10:00     2     NNE       16-Jan-2017     11:00     1.9     NE       16-Jan-2017     12:00     2.3     ENE       16-Jan-2017     13:00     2.5     ENE       16-Jan-2017     14:00     2.5     NE |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| 16-Jan-2017     11:00     1.9     NE       16-Jan-2017     12:00     2.3     ENE       16-Jan-2017     13:00     2.5     ENE       16-Jan-2017     14:00     2.5     NE                                                                                     |  |
| 16-Jan-2017       12:00       2.3       ENE         16-Jan-2017       13:00       2.5       ENE         16-Jan-2017       14:00       2.5       NE                                                                                                          |  |
| 16-Jan-2017 13:00 2.5 ENE<br>16-Jan-2017 14:00 2.5 NE                                                                                                                                                                                                       |  |
| 16-Jan-2017 14:00 2.5 NE                                                                                                                                                                                                                                    |  |
|                                                                                                                                                                                                                                                             |  |
| 40 L 2047 45 00 04 NNE                                                                                                                                                                                                                                      |  |
| 16-Jan-2017 15:00 2.4 NNE                                                                                                                                                                                                                                   |  |
| 16-Jan-2017 16:00 2.1 NE                                                                                                                                                                                                                                    |  |
| 16-Jan-2017 17:00 2 NE                                                                                                                                                                                                                                      |  |
| 16-Jan-2017 18:00 1.7 NE                                                                                                                                                                                                                                    |  |
| 16-Jan-2017 19:00 1.4 E                                                                                                                                                                                                                                     |  |
| 16-Jan-2017 20:00 1.3 E                                                                                                                                                                                                                                     |  |
| 16-Jan-2017 21:00 1.2 W                                                                                                                                                                                                                                     |  |
| 16-Jan-2017 22:00 1 NE                                                                                                                                                                                                                                      |  |
| 16-Jan-2017 23:00 0.9 NNE                                                                                                                                                                                                                                   |  |
| 17-Jan-2017 0:00 1.1 NE                                                                                                                                                                                                                                     |  |
| 17-Jan-2017 1:00 1.3 N                                                                                                                                                                                                                                      |  |
| 17-Jan-2017 2:00 1 N                                                                                                                                                                                                                                        |  |
| 17-Jan-2017 3:00 1.3 ENE                                                                                                                                                                                                                                    |  |
| 17-Jan-2017 4:00 1.1 N                                                                                                                                                                                                                                      |  |
| 17-Jan-2017 5:00 1.3 NNE                                                                                                                                                                                                                                    |  |
| 17-Jan-2017 6:00 1.3 N                                                                                                                                                                                                                                      |  |
| 17-Jan-2017 7:00 1.3 N                                                                                                                                                                                                                                      |  |
| 17-Jan-2017 8:00 2.1 N                                                                                                                                                                                                                                      |  |
| 17-Jan-2017 9:00 1.8 NE                                                                                                                                                                                                                                     |  |
| 17-Jan-2017 10:00 1.9 NNE                                                                                                                                                                                                                                   |  |
| 17-Jan-2017 11:00 2.6 NNE                                                                                                                                                                                                                                   |  |
| 17-Jan-2017 12:00 2.5 NE                                                                                                                                                                                                                                    |  |
| 17-Jan-2017 13:00 2.7 NE                                                                                                                                                                                                                                    |  |
| 17-Jan-2017 14:00 2.6 NNE                                                                                                                                                                                                                                   |  |
| 17-Jan-2017 15:00 3 NNE                                                                                                                                                                                                                                     |  |
| 17-Jan-2017 16:00 2.8 NNE                                                                                                                                                                                                                                   |  |
| 17-Jan-2017 17:00 2.2 ENE                                                                                                                                                                                                                                   |  |
| 17-Jan-2017 18:00 1.6 ENE                                                                                                                                                                                                                                   |  |
| 17-Jan-2017 19:00 1.6 ENE                                                                                                                                                                                                                                   |  |
| 17-Jan-2017 20:00 1.9 ENE                                                                                                                                                                                                                                   |  |
| 17-Jan-2017 21:00 2 ENE                                                                                                                                                                                                                                     |  |

| 17-Jan-2017 | 22:00 | 1.8 | ENE |
|-------------|-------|-----|-----|
| 17-Jan-2017 | 23:00 | 1.3 | ENE |
| 18-Jan-2017 | 0:00  | 1   | E   |
| 18-Jan-2017 | 1:00  | 1.4 | NE  |
| 18-Jan-2017 | 2:00  | 0.7 | W   |
| 18-Jan-2017 | 3:00  | 0.9 | NE  |
| 18-Jan-2017 | 4:00  | 0.9 | ENE |
| 18-Jan-2017 | 5:00  | 1.1 | ENE |
| 18-Jan-2017 | 6:00  | 0.7 | NE  |
| 18-Jan-2017 | 7:00  | 0.8 | ENE |
| 18-Jan-2017 | 8:00  | 1.2 | NE  |
| 18-Jan-2017 | 9:00  | 1.6 | NE  |
| 18-Jan-2017 | 10:00 | 2.2 | NE  |
| 18-Jan-2017 | 11:00 | 2.1 | NE  |
| 18-Jan-2017 | 12:00 | 2.5 | NE  |
| 18-Jan-2017 | 13:00 | 2   | NE  |
| 18-Jan-2017 | 14:00 | 2   | NNE |
| 18-Jan-2017 | 15:00 | 2.2 | N   |
| 18-Jan-2017 | 16:00 | 2.2 | N   |
| 18-Jan-2017 | 17:00 | 2   | N   |
| 18-Jan-2017 | 18:00 | 1.9 | E   |
| 18-Jan-2017 | 19:00 | 1.5 | E   |
| 18-Jan-2017 | 20:00 | 2.3 | ENE |
| 18-Jan-2017 | 21:00 | 2.3 | ENE |
| 18-Jan-2017 | 22:00 | 1.7 | ENE |
| 18-Jan-2017 | 23:00 | 2.2 | ENE |
| 19-Jan-2017 | 0:00  | 2.4 | ESE |
| 19-Jan-2017 | 1:00  | 2   | NNW |
| 19-Jan-2017 | 2:00  | 2.7 | ENE |
| 19-Jan-2017 | 3:00  | 2.2 | N   |
| 19-Jan-2017 | 4:00  | 1.9 | W   |
| 19-Jan-2017 | 5:00  | 2.2 | W   |
| 19-Jan-2017 | 6:00  | 2.1 | W   |
| 19-Jan-2017 | 7:00  | 1.9 | WSW |
| 19-Jan-2017 | 8:00  | 2.3 | S   |
| 19-Jan-2017 | 9:00  | 2.3 | S   |
| 19-Jan-2017 | 10:00 | 2.6 | WNW |
|             |       |     |     |

| 1           |       | T   | T   |  |
|-------------|-------|-----|-----|--|
| 19-Jan-2017 | 11:00 | 2.7 | N   |  |
| 19-Jan-2017 | 12:00 | 2.9 | N   |  |
| 19-Jan-2017 | 13:00 | 1.9 | NW  |  |
| 19-Jan-2017 | 14:00 | 2.4 | NW  |  |
| 19-Jan-2017 | 15:00 | 2   | WNW |  |
| 19-Jan-2017 | 16:00 | 2.5 | WNW |  |
| 19-Jan-2017 | 17:00 | 2.4 | Е   |  |
| 19-Jan-2017 | 18:00 | 2   | ESE |  |
| 19-Jan-2017 | 19:00 | 1.6 | NNE |  |
| 19-Jan-2017 | 20:00 | 1.5 | N   |  |
| 19-Jan-2017 | 21:00 | 0.9 | N   |  |
| 19-Jan-2017 | 22:00 | 1.1 | NW  |  |
| 19-Jan-2017 | 23:00 | 1.4 | W   |  |
| 20-Jan-2017 | 0:00  | 1.3 | NNE |  |
| 20-Jan-2017 | 1:00  | 1   | Е   |  |
| 20-Jan-2017 | 2:00  | 1.3 | ENE |  |
| 20-Jan-2017 | 3:00  | 0.9 | ENE |  |
| 20-Jan-2017 | 4:00  | 1   | WNW |  |
| 20-Jan-2017 | 5:00  | 0.9 | WNW |  |
| 20-Jan-2017 | 6:00  | 0.9 | WNW |  |
| 20-Jan-2017 | 7:00  | 0.9 | WNW |  |
| 20-Jan-2017 | 8:00  | 1.1 | WNW |  |
| 20-Jan-2017 | 9:00  | 1.6 | WNW |  |
| 20-Jan-2017 | 10:00 | 2.2 | SW  |  |
| 20-Jan-2017 | 11:00 | 2.3 | WNW |  |
| 20-Jan-2017 | 12:00 | 2.3 | WSW |  |
| 20-Jan-2017 | 13:00 | 2   | SW  |  |
| 20-Jan-2017 | 14:00 | 2.4 | W   |  |
| 20-Jan-2017 | 15:00 | 2.4 | W   |  |
| 20-Jan-2017 | 16:00 | 2.2 | WNW |  |
| 20-Jan-2017 | 17:00 | 2.1 | SW  |  |
| 20-Jan-2017 | 18:00 | 1.9 | SW  |  |
| 20-Jan-2017 | 19:00 | 1.6 | WNW |  |
| 20-Jan-2017 | 20:00 | 0.9 | W   |  |
| 20-Jan-2017 | 21:00 | 1   | W   |  |
| 20-Jan-2017 | 22:00 | 0.9 | WNW |  |
| 20-Jan-2017 | 23:00 | 1.1 | W   |  |

| 21-Jan-2017 | 0:00  | 1.1 | W   |  |
|-------------|-------|-----|-----|--|
| 21-Jan-2017 | 1:00  | 1.1 | WNW |  |
| 21-Jan-2017 | 2:00  | 1   | SSW |  |
| 21-Jan-2017 | 3:00  | 1.2 | WNW |  |
| 21-Jan-2017 | 4:00  | 1.2 | WNW |  |
| 21-Jan-2017 | 5:00  | 1   | WNW |  |
| 21-Jan-2017 | 6:00  | 1.2 | NNE |  |
| 21-Jan-2017 | 7:00  | 1.3 | NNE |  |
| 21-Jan-2017 | 8:00  | 1.3 | SSW |  |
| 21-Jan-2017 | 9:00  | 1.8 | SW  |  |
| 21-Jan-2017 | 10:00 | 2   | W   |  |
| 21-Jan-2017 | 11:00 | 2.2 | NNE |  |
| 21-Jan-2017 | 12:00 | 2.3 | SE  |  |
| 21-Jan-2017 | 13:00 | 2.5 | ENE |  |
| 21-Jan-2017 | 14:00 | 2.7 | NE  |  |
| 21-Jan-2017 | 15:00 | 2.9 | ENE |  |
| 21-Jan-2017 | 16:00 | 2.7 | NE  |  |
| 21-Jan-2017 | 17:00 | 2.6 | N   |  |
| 21-Jan-2017 | 18:00 | 2.4 | NNE |  |
| 21-Jan-2017 | 19:00 | 2.1 | NE  |  |
| 21-Jan-2017 | 20:00 | 2.4 | E   |  |
| 21-Jan-2017 | 21:00 | 2.3 | ENE |  |
| 21-Jan-2017 | 22:00 | 2.3 | ENE |  |
| 21-Jan-2017 | 23:00 | 2.3 | NE  |  |
| 22-Jan-2017 | 0:00  | 2.6 | N   |  |
| 22-Jan-2017 | 1:00  | 2.3 | ENE |  |
| 22-Jan-2017 | 2:00  | 2.2 | ENE |  |
| 22-Jan-2017 | 3:00  | 1.8 | ENE |  |
| 22-Jan-2017 | 4:00  | 2.4 | N   |  |
| 22-Jan-2017 | 5:00  | 2.4 | SSE |  |
| 22-Jan-2017 | 6:00  | 1.8 | E   |  |
| 22-Jan-2017 | 7:00  | 1.9 | ENE |  |
| 22-Jan-2017 | 8:00  | 2.4 | ESE |  |
| 22-Jan-2017 | 9:00  | 2.4 | ENE |  |
| 22-Jan-2017 | 10:00 | 2.4 | ENE |  |
| 22-Jan-2017 | 11:00 | 2.6 | ENE |  |
| 22-Jan-2017 | 12:00 | 2.5 | ESE |  |

| 22-Jan-2017       13:00       2.5       ESE         22-Jan-2017       14:00       2.7       ENE         22-Jan-2017       15:00       2.4       ENE         22-Jan-2017       16:00       2.8       ENE         22-Jan-2017       17:00       2.2       ENE         22-Jan-2017       18:00       2       NE         22-Jan-2017       19:00       2.6       ENE         22-Jan-2017       20:00       2.8       NE         22-Jan-2017       21:00       3       NE |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 22-Jan-2017       15:00       2.4       ENE         22-Jan-2017       16:00       2.8       ENE         22-Jan-2017       17:00       2.2       ENE         22-Jan-2017       18:00       2       NE         22-Jan-2017       19:00       2.6       ENE         22-Jan-2017       20:00       2.8       NE                                                                                                                                                          |
| 22-Jan-2017       16:00       2.8       ENE         22-Jan-2017       17:00       2.2       ENE         22-Jan-2017       18:00       2       NE         22-Jan-2017       19:00       2.6       ENE         22-Jan-2017       20:00       2.8       NE                                                                                                                                                                                                              |
| 22-Jan-2017       17:00       2.2       ENE         22-Jan-2017       18:00       2       NE         22-Jan-2017       19:00       2.6       ENE         22-Jan-2017       20:00       2.8       NE                                                                                                                                                                                                                                                                  |
| 22-Jan-2017       18:00       2       NE         22-Jan-2017       19:00       2.6       ENE         22-Jan-2017       20:00       2.8       NE                                                                                                                                                                                                                                                                                                                      |
| 22-Jan-2017 19:00 2.6 ENE<br>22-Jan-2017 20:00 2.8 NE                                                                                                                                                                                                                                                                                                                                                                                                                |
| 22-Jan-2017 20:00 2.8 NE                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 22-Jan-2017 21:00 3 NE                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 22-Jan-2017 22:00 2.7 NE                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| 22-Jan-2017 23:00 2.4 NNE                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 23-Jan-2017 0:00 2.3 NNE                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| 23-Jan-2017 1:00 2.3 NE                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 23-Jan-2017 2:00 2.4 NNE                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| 23-Jan-2017 3:00 1.9 ENE                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| 23-Jan-2017 4:00 2.2 E                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| 23-Jan-2017 5:00 2.5 ENE                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| 23-Jan-2017 6:00 2 ENE                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| 23-Jan-2017 7:00 1.9 NE                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 23-Jan-2017 8:00 2.3 SSE                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| 23-Jan-2017 9:00 2.5 NNE                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| 23-Jan-2017 10:00 3.2 NNE                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 23-Jan-2017 11:00 3.2 N                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 23-Jan-2017 12:00 3.1 NE                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| 23-Jan-2017 13:00 3.4 ENE                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 23-Jan-2017 14:00 2.9 ENE                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 23-Jan-2017 15:00 2.8 ENE                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 23-Jan-2017 16:00 2.6 ENE                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 23-Jan-2017 17:00 2.8 ESE                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 23-Jan-2017 18:00 2.5 ESE                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 23-Jan-2017 19:00 2.1 ESE                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 23-Jan-2017 20:00 2.4 ESE                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 23-Jan-2017 21:00 2.2 NNE                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 23-Jan-2017 22:00 1.7 NNE                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 23-Jan-2017 23:00 1.4 NE                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| 24-Jan-2017 0:00 1.5 SE                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 24-Jan-2017 1:00 1.5 E                                                                                                                                                                                                                                                                                                                                                                                                                                               |

| 24-Jan-2017 | 2:00  | 1.2 | NNE |  |
|-------------|-------|-----|-----|--|
| 24-Jan-2017 | 3:00  | 1.1 | NNE |  |
| 24-Jan-2017 | 4:00  | 1.3 | NE  |  |
| 24-Jan-2017 | 5:00  | 1.4 | NE  |  |
| 24-Jan-2017 | 6:00  | 1.3 | NE  |  |
| 24-Jan-2017 | 7:00  | 1.4 | NE  |  |
| 24-Jan-2017 | 8:00  | 1.8 | NE  |  |
| 24-Jan-2017 | 9:00  | 2.1 | ESE |  |
| 24-Jan-2017 | 10:00 | 2.5 | ESE |  |
| 24-Jan-2017 | 11:00 | 2.6 | ESE |  |
| 24-Jan-2017 | 12:00 | 2.4 | WSW |  |
| 24-Jan-2017 | 13:00 | 2.5 | NE  |  |
| 24-Jan-2017 | 14:00 | 2.9 | S   |  |
| 24-Jan-2017 | 15:00 | 2.6 | SE  |  |
| 24-Jan-2017 | 16:00 | 2.4 | ESE |  |
| 24-Jan-2017 | 17:00 | 1.9 | NE  |  |
| 24-Jan-2017 | 18:00 | 1.8 | ENE |  |
| 24-Jan-2017 | 19:00 | 1.5 | ESE |  |
| 24-Jan-2017 | 20:00 | 1.3 | ENE |  |
| 24-Jan-2017 | 21:00 | 1.2 | SSE |  |
| 24-Jan-2017 | 22:00 | 1.2 | SW  |  |
| 24-Jan-2017 | 23:00 | 1.3 | W   |  |
| 25-Jan-2017 | 0:00  | 1.3 | N   |  |
| 25-Jan-2017 | 1:00  | 1.2 | N   |  |
| 25-Jan-2017 | 2:00  | 1.2 | SE  |  |
| 25-Jan-2017 | 3:00  | 1.1 | SE  |  |
| 25-Jan-2017 | 4:00  | 1   | SSE |  |
| 25-Jan-2017 | 5:00  | 1.1 | SSE |  |
| 25-Jan-2017 | 6:00  | 0.9 | ESE |  |
| 25-Jan-2017 | 7:00  | 1.2 | SSE |  |
| 25-Jan-2017 | 8:00  | 2   | ENE |  |
| 25-Jan-2017 | 9:00  | 2.6 | NE  |  |
| 25-Jan-2017 | 10:00 | 2.7 | ENE |  |
| 25-Jan-2017 | 11:00 | 2.5 | NE  |  |
| 25-Jan-2017 | 12:00 | 1.9 | N   |  |
| 25-Jan-2017 | 13:00 | 2.4 | SE  |  |
| 25-Jan-2017 | 14:00 | 2.3 | SE  |  |
| L           | · ·   |     |     |  |

| 25-Jan-2017 | 15:00 | 2.8 | SE  |  |
|-------------|-------|-----|-----|--|
| 25-Jan-2017 | 16:00 | 2.4 | ESE |  |
| 25-Jan-2017 | 17:00 | 1.9 | SE  |  |
| 25-Jan-2017 | 18:00 | 1.6 | SE  |  |
| 25-Jan-2017 | 19:00 | 1.2 | ESE |  |
| 25-Jan-2017 | 20:00 | 0.9 | SE  |  |
| 25-Jan-2017 | 21:00 | 0.7 | SSE |  |
| 25-Jan-2017 | 22:00 | 0.6 | SE  |  |
| 25-Jan-2017 | 23:00 | 0.7 | SE  |  |
| 26-Jan-2017 | 0:00  | 0.8 | SE  |  |
| 26-Jan-2017 | 1:00  | 0.6 | NE  |  |
| 26-Jan-2017 | 2:00  | 0.6 | NE  |  |
| 26-Jan-2017 | 3:00  | 0.6 | E   |  |
| 26-Jan-2017 | 4:00  | 0.5 | ESE |  |
| 26-Jan-2017 | 5:00  | 0.5 | ENE |  |
| 26-Jan-2017 | 6:00  | 0.4 | NE  |  |
| 26-Jan-2017 | 7:00  | 0.6 | NE  |  |
| 26-Jan-2017 | 8:00  | 1.9 | ESE |  |
| 26-Jan-2017 | 9:00  | 2.2 | SE  |  |
| 26-Jan-2017 | 10:00 | 2.1 | NE  |  |
| 26-Jan-2017 | 11:00 | 1.6 | SE  |  |
| 26-Jan-2017 | 12:00 | 2.2 | SSW |  |
| 26-Jan-2017 | 13:00 | 2.5 | ESE |  |
| 26-Jan-2017 | 14:00 | 2.2 | SSW |  |
| 26-Jan-2017 | 15:00 | 2.2 | SE  |  |
| 26-Jan-2017 | 16:00 | 2.1 | SE  |  |
| 26-Jan-2017 | 17:00 | 1.7 | SE  |  |
| 26-Jan-2017 | 18:00 | 1.2 | NE  |  |
| 26-Jan-2017 | 19:00 | 1   | NE  |  |
| 26-Jan-2017 | 20:00 | 1.2 | ESE |  |
| 26-Jan-2017 | 21:00 | 1.8 | ESE |  |
| 26-Jan-2017 | 22:00 | 1.8 | ESE |  |
| 26-Jan-2017 | 23:00 | 1.8 | NE  |  |
| 27-Jan-2017 | 0:00  | 1.4 | ENE |  |
| 27-Jan-2017 | 1:00  | 1.6 | SSW |  |
| 27-Jan-2017 | 2:00  | 1.4 | SSE |  |
| 27-Jan-2017 | 3:00  | 1.2 | ENE |  |
| 1           | · ·   |     |     |  |

| 27-Jan-2017         5:00         1         ESE           27-Jan-2017         6:00         0.9         NE           27-Jan-2017         7:00         0.9         NNE           27-Jan-2017         8:00         1.3         WSW           27-Jan-2017         9:00         1.6         WNW           27-Jan-2017         10:00         1.4         WSW           27-Jan-2017         11:00         1.5         ENE           27-Jan-2017         12:00         2.4         NE           27-Jan-2017         13:00         2.4         SW           27-Jan-2017         14:00         2.5         SE           27-Jan-2017         15:00         2.3         SE           27-Jan-2017         16:00         2.1         SE           27-Jan-2017         16:00         2.1         SE           27-Jan-2017         18:00         1.6         SE           27-Jan-2017         19:00         1.2         WNW           27-Jan-2017         20:00         1         ENE           27-Jan-2017         20:00         1         ENE           27-Jan-2017         20:00         0.8         N           27-Jan-201                                                                 |             | <u> </u> |     |     |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|----------|-----|-----|--|
| 27-Jan-2017         6:00         0.9         NE           27-Jan-2017         7:00         0.9         NNE           27-Jan-2017         8:00         1.3         WSW           27-Jan-2017         9:00         1.6         WNW           27-Jan-2017         10:00         1.4         WSW           27-Jan-2017         11:00         1.5         ENE           27-Jan-2017         12:00         2.4         NE           27-Jan-2017         13:00         2.4         SW           27-Jan-2017         14:00         2.5         SE           27-Jan-2017         15:00         2.3         SE           27-Jan-2017         16:00         2.1         SE           27-Jan-2017         16:00         2.1         SE           27-Jan-2017         18:00         1.6         SE           27-Jan-2017         19:00         1.2         WNW           27-Jan-2017         20:00         1         ENE           27-Jan-2017         20:00         1         ENE           27-Jan-2017         20:00         1         N           28-Jan-2017         2:00         0.8         N           27-Jan-2017<                                                                 | 27-Jan-2017 | 4:00     | 1.1 | SSE |  |
| 27-Jan-2017         7:00         0.9         NNE           27-Jan-2017         8:00         1.3         WSW           27-Jan-2017         9:00         1.6         WNW           27-Jan-2017         10:00         1.4         WSW           27-Jan-2017         11:00         1.5         ENE           27-Jan-2017         12:00         2.4         NE           27-Jan-2017         13:00         2.4         SW           27-Jan-2017         14:00         2.5         SE           27-Jan-2017         15:00         2.3         SE           27-Jan-2017         16:00         2.1         SE           27-Jan-2017         17:00         2.1         SE           27-Jan-2017         18:00         1.6         SE           27-Jan-2017         19:00         1.2         WNW           27-Jan-2017         20:00         1         ENE           27-Jan-2017         20:00         1         ENE           27-Jan-2017         20:00         1         N           27-Jan-2017         20:00         0.8         N           27-Jan-2017         20:00         0.8         N           27-Jan-2017                                                                 | 27-Jan-2017 | 5:00     | 1   | ESE |  |
| 27-Jan-2017         8:00         1.3         WSW           27-Jan-2017         9:00         1.6         WNW           27-Jan-2017         10:00         1.4         WSW           27-Jan-2017         11:00         1.5         ENE           27-Jan-2017         12:00         2.4         NE           27-Jan-2017         13:00         2.4         SW           27-Jan-2017         14:00         2.5         SE           27-Jan-2017         15:00         2.3         SE           27-Jan-2017         16:00         2.1         SE           27-Jan-2017         17:00         2.1         SE           27-Jan-2017         18:00         1.6         SE           27-Jan-2017         19:00         1.2         WNW           27-Jan-2017         20:00         1         ENE           27-Jan-2017         20:00         1         ENE           27-Jan-2017         20:00         1         N           27-Jan-2017         20:00         0.8         N           27-Jan-2017         20:00         0.8         N           27-Jan-2017         20:00         0.8         N           27-Jan-2017<                                                                 | 27-Jan-2017 | 6:00     | 0.9 | NE  |  |
| 27-Jan-2017         9:00         1.6         WNW           27-Jan-2017         10:00         1.4         WSW           27-Jan-2017         11:00         1.5         ENE           27-Jan-2017         12:00         2.4         NE           27-Jan-2017         13:00         2.4         SW           27-Jan-2017         14:00         2.5         SE           27-Jan-2017         15:00         2.3         SE           27-Jan-2017         16:00         2.1         SE           27-Jan-2017         17:00         2.1         SE           27-Jan-2017         18:00         1.6         SE           27-Jan-2017         19:00         1.2         WNW           27-Jan-2017         20:00         1         ENE           27-Jan-2017         21:00         1.6         ENE           27-Jan-2017         21:00         1.6         ENE           27-Jan-2017         22:00         0.8         N           27-Jan-2017         23:00         1         N           28-Jan-2017         0:00         0.9         NNE           28-Jan-2017         2:00         0.8         ENE           28-Jan-                                                                 | 27-Jan-2017 | 7:00     | 0.9 | NNE |  |
| 27-Jan-2017         10:00         1.4         WSW           27-Jan-2017         11:00         1.5         ENE           27-Jan-2017         12:00         2.4         NE           27-Jan-2017         13:00         2.4         SW           27-Jan-2017         14:00         2.5         SE           27-Jan-2017         15:00         2.3         SE           27-Jan-2017         16:00         2.1         SE           27-Jan-2017         17:00         2.1         SE           27-Jan-2017         18:00         1.6         SE           27-Jan-2017         19:00         1.2         WNW           27-Jan-2017         20:00         1         ENE           27-Jan-2017         21:00         1.6         ENE           27-Jan-2017         22:00         0.8         N           27-Jan-2017         23:00         1         N           28-Jan-2017         0:00         0.9         NNE           28-Jan-2017         1:00         0.8         ESE           28-Jan-2017         2:00         0.8         ENE           28-Jan-2017         3:00         1.7         NE           28-Jan-20                                                                 | 27-Jan-2017 | 8:00     | 1.3 | WSW |  |
| 27-Jan-2017         11:00         1.5         ENE           27-Jan-2017         12:00         2.4         NE           27-Jan-2017         13:00         2.4         SW           27-Jan-2017         14:00         2.5         SE           27-Jan-2017         15:00         2.3         SE           27-Jan-2017         16:00         2.1         SE           27-Jan-2017         17:00         2.1         SE           27-Jan-2017         18:00         1.6         SE           27-Jan-2017         19:00         1.2         WNW           27-Jan-2017         20:00         1         ENE           27-Jan-2017         20:00         1         ENE           27-Jan-2017         20:00         1.6         ENE           27-Jan-2017         20:00         1.6         ENE           27-Jan-2017         20:00         0.8         N           27-Jan-2017         20:00         0.8         N           27-Jan-2017         20:00         0.8         ENE           28-Jan-2017         1:00         0.8         ESE           28-Jan-2017         2:00         0.8         ENE           28-Jan                                                                 | 27-Jan-2017 | 9:00     | 1.6 | WNW |  |
| 27-Jan-2017         12:00         2.4         NE           27-Jan-2017         13:00         2.4         SW           27-Jan-2017         14:00         2.5         SE           27-Jan-2017         15:00         2.3         SE           27-Jan-2017         16:00         2.1         SE           27-Jan-2017         17:00         2.1         SE           27-Jan-2017         18:00         1.6         SE           27-Jan-2017         19:00         1.2         WNW           27-Jan-2017         20:00         1         ENE           27-Jan-2017         21:00         1.6         ENE           27-Jan-2017         22:00         0.8         N           27-Jan-2017         23:00         1         N           28-Jan-2017         23:00         1         N           28-Jan-2017         1:00         0.8         ESE           28-Jan-2017         2:00         0.8         ENE           28-Jan-2017         2:00         0.8         ENE           28-Jan-2017         3:00         1.7         NE           28-Jan-2017         4:00         1.6         ENE           28-Jan-2017 <td>27-Jan-2017</td> <td>10:00</td> <td>1.4</td> <td>WSW</td>      | 27-Jan-2017 | 10:00    | 1.4 | WSW |  |
| 27-Jan-2017         13:00         2.4         SW           27-Jan-2017         14:00         2.5         SE           27-Jan-2017         15:00         2.3         SE           27-Jan-2017         16:00         2.1         SE           27-Jan-2017         17:00         2.1         SE           27-Jan-2017         18:00         1.6         SE           27-Jan-2017         19:00         1.2         WNW           27-Jan-2017         20:00         1         ENE           27-Jan-2017         21:00         1.6         ENE           27-Jan-2017         22:00         0.8         N           27-Jan-2017         23:00         1         N           28-Jan-2017         23:00         1         N           28-Jan-2017         1:00         0.8         ESE           28-Jan-2017         1:00         0.8         ESE           28-Jan-2017         2:00         0.8         ENE           28-Jan-2017         3:00         1.7         NE           28-Jan-2017         4:00         1.6         ENE           28-Jan-2017         5:00         1.4         ENE           28-Jan-2017 <td>27-Jan-2017</td> <td>11:00</td> <td>1.5</td> <td>ENE</td>      | 27-Jan-2017 | 11:00    | 1.5 | ENE |  |
| 27-Jan-2017         14:00         2.5         SE           27-Jan-2017         15:00         2.3         SE           27-Jan-2017         16:00         2.1         SE           27-Jan-2017         17:00         2.1         SE           27-Jan-2017         18:00         1.6         SE           27-Jan-2017         19:00         1.2         WNW           27-Jan-2017         20:00         1         ENE           27-Jan-2017         21:00         1.6         ENE           27-Jan-2017         22:00         0.8         N           27-Jan-2017         23:00         1         N           28-Jan-2017         0:00         0.9         NNE           28-Jan-2017         1:00         0.8         ESE           28-Jan-2017         2:00         0.8         ENE           28-Jan-2017         3:00         1.7         NE           28-Jan-2017         4:00         1.6         ENE           28-Jan-2017         5:00         1.4         ENE           28-Jan-2017         7:00         1.6         NE           28-Jan-2017         8:00         1.8         N           28-Jan-2017 <td>27-Jan-2017</td> <td>12:00</td> <td>2.4</td> <td>NE</td>       | 27-Jan-2017 | 12:00    | 2.4 | NE  |  |
| 27-Jan-2017         15:00         2.3         SE           27-Jan-2017         16:00         2.1         SE           27-Jan-2017         17:00         2.1         SE           27-Jan-2017         18:00         1.6         SE           27-Jan-2017         19:00         1.2         WNW           27-Jan-2017         20:00         1         ENE           27-Jan-2017         21:00         1.6         ENE           27-Jan-2017         22:00         0.8         N           27-Jan-2017         23:00         1         N           28-Jan-2017         0:00         0.9         NNE           28-Jan-2017         1:00         0.8         ESE           28-Jan-2017         2:00         0.8         ENE           28-Jan-2017         3:00         1.7         NE           28-Jan-2017         4:00         1.6         ENE           28-Jan-2017         5:00         1.4         ENE           28-Jan-2017         6:00         1.4         ENE           28-Jan-2017         8:00         1.8         N           28-Jan-2017         9:00         2.3         ENE           28-Jan-2017 </td <td>27-Jan-2017</td> <td>13:00</td> <td>2.4</td> <td>SW</td> | 27-Jan-2017 | 13:00    | 2.4 | SW  |  |
| 27-Jan-2017         16:00         2.1         SE           27-Jan-2017         17:00         2.1         SE           27-Jan-2017         18:00         1.6         SE           27-Jan-2017         19:00         1.2         WNW           27-Jan-2017         20:00         1         ENE           27-Jan-2017         21:00         1.6         ENE           27-Jan-2017         22:00         0.8         N           27-Jan-2017         23:00         1         N           28-Jan-2017         0:00         0.9         NNE           28-Jan-2017         1:00         0.8         ESE           28-Jan-2017         2:00         0.8         ENE           28-Jan-2017         3:00         1.7         NE           28-Jan-2017         4:00         1.6         ENE           28-Jan-2017         5:00         1.4         ENE           28-Jan-2017         6:00         1.4         ENE           28-Jan-2017         8:00         1.8         N           28-Jan-2017         9:00         2.3         ENE           28-Jan-2017         10:00         3.1         NE           28-Jan-2017 </td <td>27-Jan-2017</td> <td>14:00</td> <td>2.5</td> <td>SE</td> | 27-Jan-2017 | 14:00    | 2.5 | SE  |  |
| 27-Jan-2017         17:00         2.1         SE           27-Jan-2017         18:00         1.6         SE           27-Jan-2017         19:00         1.2         WNW           27-Jan-2017         20:00         1         ENE           27-Jan-2017         21:00         1.6         ENE           27-Jan-2017         22:00         0.8         N           27-Jan-2017         23:00         1         N           28-Jan-2017         0:00         0.9         NNE           28-Jan-2017         1:00         0.8         ESE           28-Jan-2017         2:00         0.8         ENE           28-Jan-2017         3:00         1.7         NE           28-Jan-2017         4:00         1.6         ENE           28-Jan-2017         5:00         1.4         ENE           28-Jan-2017         6:00         1.4         ENE           28-Jan-2017         8:00         1.8         N           28-Jan-2017         9:00         2.3         ENE           28-Jan-2017         10:00         3.1         NE           28-Jan-2017         11:00         3.1         W           28-Jan-2017 <td>27-Jan-2017</td> <td>15:00</td> <td>2.3</td> <td>SE</td>       | 27-Jan-2017 | 15:00    | 2.3 | SE  |  |
| 27-Jan-2017       18:00       1.6       SE         27-Jan-2017       19:00       1.2       WNW         27-Jan-2017       20:00       1       ENE         27-Jan-2017       21:00       1.6       ENE         27-Jan-2017       22:00       0.8       N         27-Jan-2017       23:00       1       N         28-Jan-2017       0:00       0.9       NNE         28-Jan-2017       1:00       0.8       ESE         28-Jan-2017       2:00       0.8       ENE         28-Jan-2017       3:00       1.7       NE         28-Jan-2017       4:00       1.6       ENE         28-Jan-2017       5:00       1.4       ENE         28-Jan-2017       5:00       1.4       ENE         28-Jan-2017       7:00       1.6       NE         28-Jan-2017       8:00       1.8       N         28-Jan-2017       10:00       3.1       NE         28-Jan-2017       11:00       3.1       NE         28-Jan-2017       11:00       3.1       W         28-Jan-2017       12:00       2.7       N         28-Jan-2017       13:00                                                                                                                                                       | 27-Jan-2017 | 16:00    | 2.1 | SE  |  |
| 27-Jan-2017         19:00         1.2         WNW           27-Jan-2017         20:00         1         ENE           27-Jan-2017         21:00         1.6         ENE           27-Jan-2017         22:00         0.8         N           27-Jan-2017         23:00         1         N           28-Jan-2017         0:00         0.9         NNE           28-Jan-2017         1:00         0.8         ESE           28-Jan-2017         2:00         0.8         ENE           28-Jan-2017         3:00         1.7         NE           28-Jan-2017         4:00         1.6         ENE           28-Jan-2017         5:00         1.4         ENE           28-Jan-2017         6:00         1.4         ENE           28-Jan-2017         7:00         1.6         NE           28-Jan-2017         9:00         2.3         ENE           28-Jan-2017         10:00         3.1         NE           28-Jan-2017         11:00         3.1         W           28-Jan-2017         12:00         2.7         N           28-Jan-2017         13:00         2.8         NE                                                                                          | 27-Jan-2017 | 17:00    | 2.1 | SE  |  |
| 27-Jan-2017         20:00         1         ENE           27-Jan-2017         21:00         1.6         ENE           27-Jan-2017         22:00         0.8         N           27-Jan-2017         23:00         1         N           28-Jan-2017         0:00         0.9         NNE           28-Jan-2017         1:00         0.8         ESE           28-Jan-2017         2:00         0.8         ENE           28-Jan-2017         3:00         1.7         NE           28-Jan-2017         4:00         1.6         ENE           28-Jan-2017         5:00         1.4         ENE           28-Jan-2017         6:00         1.4         ENE           28-Jan-2017         7:00         1.6         NE           28-Jan-2017         8:00         1.8         N           28-Jan-2017         9:00         2.3         ENE           28-Jan-2017         10:00         3.1         NE           28-Jan-2017         11:00         3.1         W           28-Jan-2017         12:00         2.7         N           28-Jan-2017         13:00         2.8         NE                                                                                             | 27-Jan-2017 | 18:00    | 1.6 | SE  |  |
| 27-Jan-2017       21:00       1.6       ENE         27-Jan-2017       22:00       0.8       N         27-Jan-2017       23:00       1       N         28-Jan-2017       0:00       0.9       NNE         28-Jan-2017       1:00       0.8       ESE         28-Jan-2017       2:00       0.8       ENE         28-Jan-2017       3:00       1.7       NE         28-Jan-2017       4:00       1.6       ENE         28-Jan-2017       5:00       1.4       ENE         28-Jan-2017       6:00       1.4       ENE         28-Jan-2017       8:00       1.8       N         28-Jan-2017       9:00       2.3       ENE         28-Jan-2017       10:00       3.1       NE         28-Jan-2017       11:00       3.1       W         28-Jan-2017       12:00       2.7       N         28-Jan-2017       13:00       2.8       NE                                                                                                                                                                                                                                                                                                                                               | 27-Jan-2017 | 19:00    | 1.2 | WNW |  |
| 27-Jan-2017         22:00         0.8         N           27-Jan-2017         23:00         1         N           28-Jan-2017         0:00         0.9         NNE           28-Jan-2017         1:00         0.8         ESE           28-Jan-2017         2:00         0.8         ENE           28-Jan-2017         3:00         1.7         NE           28-Jan-2017         4:00         1.6         ENE           28-Jan-2017         5:00         1.4         ENE           28-Jan-2017         6:00         1.4         ENE           28-Jan-2017         7:00         1.6         NE           28-Jan-2017         8:00         1.8         N           28-Jan-2017         10:00         3.1         NE           28-Jan-2017         11:00         3.1         W           28-Jan-2017         12:00         2.7         N           28-Jan-2017         13:00         2.8         NE                                                                                                                                                                                                                                                                              | 27-Jan-2017 | 20:00    | 1   | ENE |  |
| 27-Jan-2017       23:00       1       N         28-Jan-2017       0:00       0.9       NNE         28-Jan-2017       1:00       0.8       ESE         28-Jan-2017       2:00       0.8       ENE         28-Jan-2017       3:00       1.7       NE         28-Jan-2017       4:00       1.6       ENE         28-Jan-2017       5:00       1.4       ENE         28-Jan-2017       6:00       1.4       ENE         28-Jan-2017       7:00       1.6       NE         28-Jan-2017       8:00       1.8       N         28-Jan-2017       9:00       2.3       ENE         28-Jan-2017       10:00       3.1       NE         28-Jan-2017       11:00       3.1       W         28-Jan-2017       12:00       2.7       N         28-Jan-2017       13:00       2.8       NE                                                                                                                                                                                                                                                                                                                                                                                                   | 27-Jan-2017 | 21:00    | 1.6 | ENE |  |
| 28-Jan-2017       0:00       0.9       NNE         28-Jan-2017       1:00       0.8       ESE         28-Jan-2017       2:00       0.8       ENE         28-Jan-2017       3:00       1.7       NE         28-Jan-2017       4:00       1.6       ENE         28-Jan-2017       5:00       1.4       ENE         28-Jan-2017       6:00       1.4       ENE         28-Jan-2017       7:00       1.6       NE         28-Jan-2017       8:00       1.8       N         28-Jan-2017       9:00       2.3       ENE         28-Jan-2017       10:00       3.1       NE         28-Jan-2017       11:00       3.1       W         28-Jan-2017       12:00       2.7       N         28-Jan-2017       13:00       2.8       NE                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 27-Jan-2017 | 22:00    | 0.8 | N   |  |
| 28-Jan-2017       1:00       0.8       ESE         28-Jan-2017       2:00       0.8       ENE         28-Jan-2017       3:00       1.7       NE         28-Jan-2017       4:00       1.6       ENE         28-Jan-2017       5:00       1.4       ENE         28-Jan-2017       6:00       1.4       ENE         28-Jan-2017       7:00       1.6       NE         28-Jan-2017       8:00       1.8       N         28-Jan-2017       9:00       2.3       ENE         28-Jan-2017       10:00       3.1       NE         28-Jan-2017       11:00       3.1       W         28-Jan-2017       12:00       2.7       N         28-Jan-2017       13:00       2.8       NE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 27-Jan-2017 | 23:00    | 1   | N   |  |
| 28-Jan-2017       2:00       0.8       ENE         28-Jan-2017       3:00       1.7       NE         28-Jan-2017       4:00       1.6       ENE         28-Jan-2017       5:00       1.4       ENE         28-Jan-2017       6:00       1.4       ENE         28-Jan-2017       7:00       1.6       NE         28-Jan-2017       8:00       1.8       N         28-Jan-2017       9:00       2.3       ENE         28-Jan-2017       10:00       3.1       NE         28-Jan-2017       11:00       3.1       W         28-Jan-2017       12:00       2.7       N         28-Jan-2017       13:00       2.8       NE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 28-Jan-2017 | 0:00     | 0.9 | NNE |  |
| 28-Jan-2017       3:00       1.7       NE         28-Jan-2017       4:00       1.6       ENE         28-Jan-2017       5:00       1.4       ENE         28-Jan-2017       6:00       1.4       ENE         28-Jan-2017       7:00       1.6       NE         28-Jan-2017       8:00       1.8       N         28-Jan-2017       9:00       2.3       ENE         28-Jan-2017       10:00       3.1       NE         28-Jan-2017       11:00       3.1       W         28-Jan-2017       12:00       2.7       N         28-Jan-2017       13:00       2.8       NE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 28-Jan-2017 | 1:00     | 0.8 | ESE |  |
| 28-Jan-2017       4:00       1.6       ENE         28-Jan-2017       5:00       1.4       ENE         28-Jan-2017       6:00       1.4       ENE         28-Jan-2017       7:00       1.6       NE         28-Jan-2017       8:00       1.8       N         28-Jan-2017       9:00       2.3       ENE         28-Jan-2017       10:00       3.1       NE         28-Jan-2017       11:00       3.1       W         28-Jan-2017       12:00       2.7       N         28-Jan-2017       13:00       2.8       NE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 28-Jan-2017 | 2:00     | 0.8 | ENE |  |
| 28-Jan-2017       5:00       1.4       ENE         28-Jan-2017       6:00       1.4       ENE         28-Jan-2017       7:00       1.6       NE         28-Jan-2017       8:00       1.8       N         28-Jan-2017       9:00       2.3       ENE         28-Jan-2017       10:00       3.1       NE         28-Jan-2017       11:00       3.1       W         28-Jan-2017       12:00       2.7       N         28-Jan-2017       13:00       2.8       NE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 28-Jan-2017 | 3:00     | 1.7 | NE  |  |
| 28-Jan-2017       6:00       1.4       ENE         28-Jan-2017       7:00       1.6       NE         28-Jan-2017       8:00       1.8       N         28-Jan-2017       9:00       2.3       ENE         28-Jan-2017       10:00       3.1       NE         28-Jan-2017       11:00       3.1       W         28-Jan-2017       12:00       2.7       N         28-Jan-2017       13:00       2.8       NE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 28-Jan-2017 | 4:00     | 1.6 | ENE |  |
| 28-Jan-2017       7:00       1.6       NE         28-Jan-2017       8:00       1.8       N         28-Jan-2017       9:00       2.3       ENE         28-Jan-2017       10:00       3.1       NE         28-Jan-2017       11:00       3.1       W         28-Jan-2017       12:00       2.7       N         28-Jan-2017       13:00       2.8       NE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 28-Jan-2017 | 5:00     | 1.4 | ENE |  |
| 28-Jan-2017       8:00       1.8       N         28-Jan-2017       9:00       2.3       ENE         28-Jan-2017       10:00       3.1       NE         28-Jan-2017       11:00       3.1       W         28-Jan-2017       12:00       2.7       N         28-Jan-2017       13:00       2.8       NE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 28-Jan-2017 | 6:00     | 1.4 | ENE |  |
| 28-Jan-2017       9:00       2.3       ENE         28-Jan-2017       10:00       3.1       NE         28-Jan-2017       11:00       3.1       W         28-Jan-2017       12:00       2.7       N         28-Jan-2017       13:00       2.8       NE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 28-Jan-2017 | 7:00     | 1.6 | NE  |  |
| 28-Jan-2017       10:00       3.1       NE         28-Jan-2017       11:00       3.1       W         28-Jan-2017       12:00       2.7       N         28-Jan-2017       13:00       2.8       NE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 28-Jan-2017 | 8:00     | 1.8 | N   |  |
| 28-Jan-2017       11:00       3.1       W         28-Jan-2017       12:00       2.7       N         28-Jan-2017       13:00       2.8       NE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 28-Jan-2017 | 9:00     | 2.3 | ENE |  |
| 28-Jan-2017 12:00 2.7 N<br>28-Jan-2017 13:00 2.8 NE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 28-Jan-2017 | 10:00    | 3.1 | NE  |  |
| 28-Jan-2017 13:00 2.8 NE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 28-Jan-2017 | 11:00    | 3.1 | W   |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 28-Jan-2017 | 12:00    | 2.7 | N   |  |
| 29 Jan 2017 14:00 2.9 ENE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 28-Jan-2017 | 13:00    | 2.8 | NE  |  |
| 20-Jan-2017   14.00   2.0   ENE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 28-Jan-2017 | 14:00    | 2.8 | ENE |  |
| 28-Jan-2017 15:00 3.3 ENE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 28-Jan-2017 | 15:00    | 3.3 | ENE |  |
| 28-Jan-2017 16:00 2.7 SE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 28-Jan-2017 | 16:00    | 2.7 | SE  |  |

| 28-Jan-2017 | 17:00 | 3.2 | NE  |  |
|-------------|-------|-----|-----|--|
| 28-Jan-2017 | 18:00 | 2.5 | NE  |  |
| 28-Jan-2017 | 19:00 | 2.4 | NE  |  |
| 28-Jan-2017 | 20:00 | 2.2 | NNE |  |
| 28-Jan-2017 | 21:00 | 1.9 | NE  |  |
| 28-Jan-2017 | 22:00 | 2   | NE  |  |
| 28-Jan-2017 | 23:00 | 2   | NNE |  |
| 29-Jan-2017 | 0:00  | 2.1 | ESE |  |
| 29-Jan-2017 | 1:00  | 1.4 | NE  |  |
| 29-Jan-2017 | 2:00  | 1.6 | NE  |  |
| 29-Jan-2017 | 3:00  | 1.9 | NE  |  |
| 29-Jan-2017 | 4:00  | 1.8 | NE  |  |
| 29-Jan-2017 | 5:00  | 1.8 | NNE |  |
| 29-Jan-2017 | 6:00  | 1.8 | NNE |  |
| 29-Jan-2017 | 7:00  | 1.7 | NNE |  |
| 29-Jan-2017 | 8:00  | 1.9 | NNE |  |
| 29-Jan-2017 | 9:00  | 2.6 | NNE |  |
| 29-Jan-2017 | 10:00 | 2.9 | NNE |  |
| 29-Jan-2017 | 11:00 | 2.7 | N   |  |
| 29-Jan-2017 | 12:00 | 3   | NNE |  |
| 29-Jan-2017 | 13:00 | 2.7 | NW  |  |
| 29-Jan-2017 | 14:00 | 2.6 | WNW |  |
| 29-Jan-2017 | 15:00 | 2.9 | SSW |  |
| 29-Jan-2017 | 16:00 | 2.4 | W   |  |
| 29-Jan-2017 | 17:00 | 2.2 | WNW |  |
| 29-Jan-2017 | 18:00 | 1.7 | W   |  |
| 29-Jan-2017 | 19:00 | 1.3 | W   |  |
| 29-Jan-2017 | 20:00 | 1.3 | WNW |  |
| 29-Jan-2017 | 21:00 | 1.1 | S   |  |
| 29-Jan-2017 | 22:00 | 1.1 | NNE |  |
| 29-Jan-2017 | 23:00 | 0.9 | SSW |  |
| 30-Jan-2017 | 0:00  | 1   | SSW |  |
| 30-Jan-2017 | 1:00  | 1.1 | SW  |  |
| 30-Jan-2017 | 2:00  | 0.9 | ENE |  |
| 30-Jan-2017 | 3:00  | 1   | ENE |  |
| 30-Jan-2017 | 4:00  | 1.2 | NE  |  |
| 30-Jan-2017 | 5:00  | 1.1 | N   |  |
|             |       |     |     |  |

| 30-Jan-2017 | 6:00  | 1.1 | N   |  |
|-------------|-------|-----|-----|--|
| 30-Jan-2017 | 7:00  | 1.2 | N   |  |
| 30-Jan-2017 | 8:00  | 1.3 | N   |  |
| 30-Jan-2017 | 9:00  | 1.9 | N   |  |
| 30-Jan-2017 | 10:00 | 1.8 | NNE |  |
| 30-Jan-2017 | 11:00 | 2.3 | NE  |  |
| 30-Jan-2017 | 12:00 | 2.6 | N   |  |
| 30-Jan-2017 | 13:00 | 2.1 | NE  |  |
| 30-Jan-2017 | 14:00 | 2.4 | ENE |  |
| 30-Jan-2017 | 15:00 | 2.4 | ENE |  |
| 30-Jan-2017 | 16:00 | 2   | ENE |  |
| 30-Jan-2017 | 17:00 | 1.6 | ENE |  |
| 30-Jan-2017 | 18:00 | 1.3 | SE  |  |
| 30-Jan-2017 | 19:00 | 1.4 | SSE |  |
| 30-Jan-2017 | 20:00 | 1.2 | N   |  |
| 30-Jan-2017 | 21:00 | 1.2 | SSE |  |
| 30-Jan-2017 | 22:00 | 1   | ENE |  |
| 30-Jan-2017 | 23:00 | 1.4 | NE  |  |
| 31-Jan-2017 | 0:00  | 1.1 | ENE |  |
| 31-Jan-2017 | 1:00  | 1.2 | NNE |  |
| 31-Jan-2017 | 2:00  | 1.2 | ESE |  |
| 31-Jan-2017 | 3:00  | 1.3 | NE  |  |
| 31-Jan-2017 | 4:00  | 1.2 | NE  |  |
| 31-Jan-2017 | 5:00  | 1.3 | NE  |  |
| 31-Jan-2017 | 6:00  | 1.1 | NNE |  |
| 31-Jan-2017 | 7:00  | 1.1 | N   |  |
| 31-Jan-2017 | 8:00  | 1.6 | N   |  |
| 31-Jan-2017 | 9:00  | 1.8 | N   |  |
| 31-Jan-2017 | 10:00 | 1.9 | NNE |  |
| 31-Jan-2017 | 11:00 | 1.9 | N   |  |
| 31-Jan-2017 | 12:00 | 1.7 | N   |  |
| 31-Jan-2017 | 13:00 | 1.6 | NW  |  |
| 31-Jan-2017 | 14:00 | 1.6 | W   |  |
| 31-Jan-2017 | 15:00 | 1.9 | WNW |  |
| 31-Jan-2017 | 16:00 | 1.8 | N   |  |
| 31-Jan-2017 | 17:00 | 1.8 | W   |  |
| 31-Jan-2017 | 18:00 | 1.2 | W   |  |
| <u> </u>    | i .   |     | ·   |  |

| 31-Jan-2017 | 19:00 | 1.4 | SW  |
|-------------|-------|-----|-----|
| 31-Jan-2017 | 20:00 | 1.7 | SW  |
| 31-Jan-2017 | 21:00 | 1.2 | WNW |
| 31-Jan-2017 | 22:00 | 0.9 | W   |
| 31-Jan-2017 | 23:00 | 1   | ENE |

#### APPENDIX D ENVIRONMENTAL MONITORING SCHEDULES

#### Contract No. KL/2012/03

#### Kai Tak Development –Stage 4 Infrastructure at Former North Apron Area Impact Air and Noise Monitoring Schedule for January 2017

| Sunday | Monday                                         | Tuesday                                             | Wednesday                                                        | Thursday                                                        | Friday                                         | Saturday |
|--------|------------------------------------------------|-----------------------------------------------------|------------------------------------------------------------------|-----------------------------------------------------------------|------------------------------------------------|----------|
| 1-Jan  |                                                |                                                     |                                                                  | 5-Jan                                                           | 6-Jan                                          | 7-Jan    |
|        |                                                | Noise<br>(M9)<br>24 hr TSP*                         | 1 hr TSP X3<br>AM2, AM3(A), AM4(A) &<br>AM5(A)*<br>Noise<br>(M8) | Noise<br>(M6(A) and M7)                                         | 1 hr TSP X3<br>AM4(B)                          |          |
| 8-Jan  | 9-Jan                                          | 10-Jan                                              | 11-Jan                                                           | 12-Jan                                                          | 13-Jan                                         | 14-Jan   |
|        | Noise<br>(M6(A) and M7)                        | 1 hr TSP X3 AM2, AM3(A), AM4(B) & AM5(A) Noise (M8) |                                                                  | Noise<br>(M9)                                                   |                                                |          |
|        | 24 hr TSP                                      | (4.20)                                              |                                                                  | X - 7                                                           | 24 hr TSP                                      |          |
| 15-Jan | 16-Jan                                         | 17-Jan                                              | 18-Jan                                                           | 19-Jan                                                          | 20-Jan                                         | 21-Jan   |
|        | 1 hr TSP X3 AM2, AM3(A), AM4(B) & AM5(A) Noise | Noise<br>(M6(A) and M7)                             | Noise                                                            |                                                                 | 1 hr TSP X3<br>AM2, AM3(A), AM4(B) &<br>AM5(A) |          |
|        | (M8)                                           |                                                     | (M9)                                                             | 24 hr TSP                                                       |                                                |          |
| 22-Jan | 23-Jan                                         | 24-Jan                                              | 25-Jan                                                           | 26-Jan                                                          | 27-Jan                                         | 28-Jan   |
|        | Noise<br>(M6(A), M7, M9)                       |                                                     | 24 hr TSP                                                        | 1 hr TSP X3<br>AM2, AM3(A), AM4(B) &<br>AM5(A)<br>Noise<br>(M8) | 24 hr TSP                                      |          |
| 29-Jan | 30-Jan                                         | 31-Jan                                              |                                                                  |                                                                 |                                                |          |
|        |                                                |                                                     |                                                                  |                                                                 |                                                |          |

<sup>\*</sup>Air monitoring at AM4(A) was cancelled due to unsuccessful accessibility to the facility

#### **Air Quality Monitoring Station**

AM5(A) - Po Leung Kuk Ngan Po Ling College

AM2 - Lee Kau Yan Memorial School AM3(A) - Holy Trinity Bradbury Centre AM4(A) - EMSD Workshops AM4(B) - Ma Tau Kok Road (next to EMSD Workshops) (Temporary)

#### Noise Monitoring Station

M6(A) - Oblate Primary School M7 - CCC Kei To Secondary School M8 - Po Leung Kuk Ngan Po Ling College M9 - Tak Long Estate

#### Contract No. KL/2012/03

#### Kai Tak Development –Stage 4 Infrastructure at Former North Apron Area Tentative Impact Air and Noise Monitoring Schedule for February 2017

| Sunday | Monday                                              | Tuesday                                               | Wednesday                                                       | Thursday                                                      | Friday                  | Saturday |
|--------|-----------------------------------------------------|-------------------------------------------------------|-----------------------------------------------------------------|---------------------------------------------------------------|-------------------------|----------|
|        |                                                     |                                                       | 1-Feb                                                           | 2-Feb                                                         | 3-Feb                   | 4-Feb    |
|        |                                                     |                                                       | 1 hr TSP X3<br>AM2, AM3(A), AM4(B) &<br>AM5(A)<br>Noise<br>(M8) | Noise<br>(M9)<br>24 hr TSP                                    | Noise<br>(M6(A) and M7) |          |
| 5-Feb  | 6-Feb                                               | 7-Feb                                                 | 8-Feb                                                           | 9-Feb                                                         | 10-Feb                  | 11-Feb   |
|        | 1 hr TSP X3 AM2, AM3(A), AM4(B) & AM5(A) Noise (M8) |                                                       | Noise<br>(M9)                                                   | 1 hr TSP X3 AM2, AM3(A), AM4(B) & AM5(A) Noise (M6(A) and M7) |                         |          |
| 12-Feb | 13-Feb                                              | 14-Feb                                                | 24 hr TSP<br>15-Feb                                             | 16-Feb                                                        | 17-Feb                  | 18-Feb   |
|        |                                                     | Noise<br>(M9)                                         | 1 hr TSP X3<br>AM2, AM3(A), AM4(B) &<br>AM5(A)<br>Noise<br>(M8) | Noise<br>(M6(A) and M7)                                       |                         |          |
| 19-Feb | 20-Feb                                              | 21-Feb                                                | 22-Feb                                                          | 23-Feb                                                        | 24-Feb                  | 25-Feb   |
|        | Noise<br>(M9)                                       | 1 hr TSP X3  AM2, AM3(A), AM4(B) & AM5(A)  Noise (M8) |                                                                 |                                                               | Noise<br>(M6(A) and M7) |          |
|        | 24 hr TSP                                           | (1410)                                                |                                                                 |                                                               | 24 hr TSP               |          |
| 26-Feb |                                                     | 28-Feb                                                |                                                                 |                                                               |                         |          |
|        | 1 hr TSP X3 AM2, AM3(A), AM4(B) & AM5(A) Noise (M8) |                                                       |                                                                 |                                                               |                         |          |

The schedule may be changed due to unforeseen circumstances (adverse weather, etc)

#### **Air Quality Monitoring Station**

AM2 - Lee Kau Yan Memorial School AM3(A) - Holy Trinity Bradbury Centre AM4(B) - Ma Tau Kok Road (next to EMSD workshops) (Temporary) AM5(A) - Po Leung Kuk Ngan Po Ling College

#### Noise Monitoring Station

M6(A) - Oblate Primary School M7 - CCC Kei To Secondary School M8 - Po Leung Kuk Ngan Po Ling College M9 - Tak Long Estate

#### APPENDIX E 1-HOUR TSP MONITORING RESULTS AND GRAPHICAL PRESENTATION

### **Appendix E - 1-hour TSP Monitoring Results**

| Location AM2 - | Lee Kau Yar | n Memorial School |                                    |
|----------------|-------------|-------------------|------------------------------------|
| Date           | Time        | Weather           | Particulate Concentration ( μg/m3) |
| 4-Jan-17       | 13:00       | Sunny             | 93.3                               |
| 4-Jan-17       | 14:00       | Sunny             | 89.7                               |
| 4-Jan-17       | 15:00       | Sunny             | 92.4                               |
| 10-Jan-17      | 13:00       | Cloudy            | 193.3                              |
| 10-Jan-17      | 14:00       | Cloudy            | 184.4                              |
| 10-Jan-17      | 15:00       | Cloudy            | 211.7                              |
| 16-Jan-17      | 8:45        | Fine              | 182.5                              |
| 16-Jan-17      | 9:45        | Fine              | 183.4                              |
| 16-Jan-17      | 10:45       | Fine              | 186.0                              |
| 20-Jan-17      | 9:00        | Sunny             | 173.0                              |
| 20-Jan-17      | 10:00       | Sunny             | 178.0                              |
| 20-Jan-17      | 11:00       | Sunny             | 184.4                              |
| 26-Jan-17      | 9:00        | Sunny             | 222.4                              |
| 26-Jan-17      | 10:00       | Sunny             | 230.2                              |
| 26-Jan-17      | 11:00       | Sunny             | 232.2                              |
|                |             | Average           | 175.8                              |
|                |             |                   | 232.2                              |
|                |             | Minimum           | 89.7                               |

| ocation AM3(A) | ) - Holy Trinit | y Bradbury Centr | e                                  |
|----------------|-----------------|------------------|------------------------------------|
| Date           | Time            | Weather          | Particulate Concentration ( μg/m3) |
| 4-Jan-17       | 8:45            | Sunny            | 95.5                               |
| 4-Jan-17       | 9:45            | Sunny            | 101.6                              |
| 4-Jan-17       | 10:45           | 10:45 Sunny      | 102.6                              |
| 10-Jan-17      | 8:45            | Cloudy           | 164.2                              |
| 10-Jan-17      | 9:45            | Cloudy           | 173.7                              |
| 10-Jan-17      | 10:45           | Cloudy           | 158.7                              |
| 16-Jan-17      | 9:00            | Fine             | 171.3                              |
| 16-Jan-17      | 10:00           | Fine             | 164.9                              |
| 16-Jan-17      | 11:00           | Fine             | 167.0                              |
| 20-Jan-17      | 9:00            | Sunny            | 145.6                              |
| 20-Jan-17      | 10:00           | Sunny            | 149.1                              |
| 20-Jan-17      | 11:00           | Sunny            | 150.6                              |
| 26-Jan-17      | 13:00           | Sunny            | 210.8                              |
| 26-Jan-17      | 14:00           | Sunny            | 217.2                              |
| 26-Jan-17      | 15:00           | Sunny            | 216.5                              |
|                |                 | Average          | 159.3                              |
|                |                 | Maximum          | 217.2                              |
|                |                 | Minimum          | 95.5                               |

MA13056/App E - 1hr TSP Cinotech


### **Appendix E - 1-hour TSP Monitoring Results**

| Location AM4(B) | - Ma Tau Ko | k Road (next to E | MSD workshops) (Temporary)         |  |  |
|-----------------|-------------|-------------------|------------------------------------|--|--|
| Date            | Time        | Weather           | Particulate Concentration ( μg/m3) |  |  |
| 6-Jan-17        | 15:00       | Fine              | 47.3                               |  |  |
| 6-Jan-17        | 16:00       | Fine              | 50.9                               |  |  |
| 6-Jan-17        | 17:00       | Fine              | 43.8                               |  |  |
| 10-Jan-17       | 14:15       | Cloudy            | 149.2                              |  |  |
| 10-Jan-17       | 15:15       | Cloudy            | 158.3                              |  |  |
| 10-Jan-17       | 16:15       | Cloudy            | 161.9                              |  |  |
| 16-Jan-17       | 8:45        | Fine              | 208.0                              |  |  |
| 16-Jan-17       | 9:45        | Fine              | 209.1                              |  |  |
| 16-Jan-17       | 10:45       | Fine              | 210.2                              |  |  |
| 20-Jan-17       | 8:45        | Sunny             | 171.5                              |  |  |
| 20-Jan-17       | 9:45        | Sunny             | 175.2                              |  |  |
| 20-Jan-17       | 10:45       | Sunny             | 179.0                              |  |  |
| 26-Jan-17       | 13:00       | Sunny             | 179.9                              |  |  |
| 26-Jan-17       | 14:00       | Sunny             | 185.6                              |  |  |
| 26-Jan-17       | 15:00       | Sunny             | 184.2                              |  |  |
|                 |             |                   | 181.0                              |  |  |
|                 |             | Maximum           | 210.2                              |  |  |
|                 |             | Minimum           | 149.2                              |  |  |

| Location AM5(A | A) - Po Leung | ı Kuk Ngan Po Lir | ng College                         |
|----------------|---------------|-------------------|------------------------------------|
| Date           | Time          | Weather           | Particulate Concentration ( μg/m3) |
| 4-Jan-17       | 9:00          | Sunny             | 78.7                               |
| 4-Jan-17       | 10:00         | Sunny             | 88.4                               |
| 4-Jan-17       | 11:00         | Sunny             | 82.3                               |
| 10-Jan-17      | 9:00          | Cloudy            | 179.2                              |
| 10-Jan-17      | 10:00         | Cloudy            | 184.1                              |
| 10-Jan-17      | 11:00         | Cloudy            | 173.5                              |
| 16-Jan-17      | 13:05         | Fine              | 172.0                              |
| 16-Jan-17      | 14:05         | Fine              | 173.3                              |
| 16-Jan-17      | 15:05         | Fine              | 178.6                              |
| 20-Jan-17      | 13:00         | Sunny             | 187.7                              |
| 20-Jan-17      | 14:00         | Sunny             | 178.0                              |
| 20-Jan-17      | 15:00         | Sunny             | 188.6                              |
| 26-Jan-17      | 13:30         | Sunny             | 209.9                              |
| 26-Jan-17      | 14:30         | Sunny             | 203.0                              |
| 26-Jan-17      | 15:30         | Sunny             | 202.2                              |
|                |               | Average           | 165.3                              |
|                |               | Maximum           | 209.9                              |
|                |               | Minimum           | 78.7                               |

MA13056/App E - 1hr TSP Cinotech

#### 1-hr TSP Concentration Levels

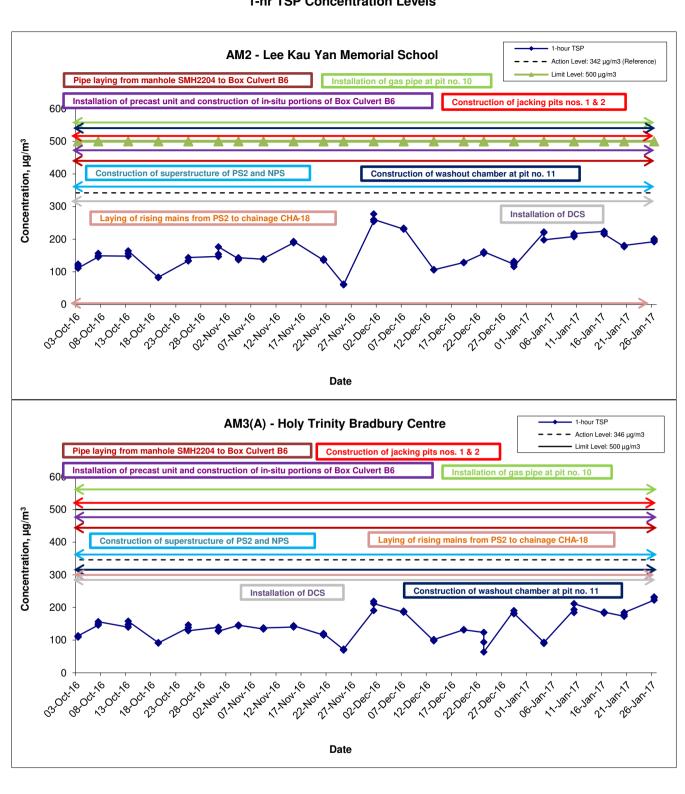

| Title | Contract No. KL/2012/03                                                | Scale |        | Project |         |          |
|-------|------------------------------------------------------------------------|-------|--------|---------|---------|----------|
|       | Kai Tak Development –Stage 4 Infrastructure at Former North Apron Area |       | N.T.S  | No.     | MA13056 | CINOTECH |
|       | Graphical Presentation of 1-hour TSP Monitoring Results                | Date  | Jan 17 | Append  | ix<br>E | CINOIECU |

#### 1-hr TSP Concentration Levels AM4(B) - Ma Tau Kok Road (next to EMSD workshops) (Temporary) 1-hour TSP Pipe laying from manhole SMH2204 to Box Culvert B6 Construction of jacking pits nos. 1 & 2 Installation of precast unit and construction of in-situ portions of Box Culvert B6 500 Concentration, µg/m³ Construction of washout chamber at pit no. 11 Construction of superstructure of PS2 and NPS 400 300 Installation of DCS 200 100 0 06-Jan-1 Date 1-hour TSP AM5(A) - Po Leung Kuk Ngan Po Ling College - Action Level: 345 μg/m3 Pipe laying from manhole SMH2204 to Box Culvert B6 Limit Level: 500 μg/m3 Installation of precast unit and construction of in-situ portions of Box Culvert B6 Installation of gas pipe at pit no. 10 600 500 Concentration, µg/m3 Construction of superstructure of PS2 and NPS Construction of washout chamber at pit no. 11 400 300 Laying of rising mains from PS2 to chainage CHA-18 Installation of DCS 200 100 0 ol Decryo 18.00t, 16 2800tr 05.40x,6 15. Wan 16 27,7404,76 05. Dec. 16 "S' Dec. 16 1, Dec 16 27.Dec. 16 17. Dec. 16 on Jan 1 23.00t 16 06-Jan 17 No.Jan.77 1.Jan 1 Date Title Scale Project Contract No. KL/2012/03 Kai Tak Development - Stage 4 Infrastructure at Former North Apron No. N.T.S MA13056 Date Appendix Graphical Presentation of 1-hour TSP Monitoring Results Jan 17 Ε

APPENDIX F 24-HOUR TSP MONITORING RESULTS AND GRAPHICAL PRESENTATION

#### Appendix F - 24-hour TSP Monitoring Results

#### Location AM2 - Lee Kau Yan Memorial School

| Start Date | Weather   | Air       | Atmospheric         | Filter W | eight (g) | Particulate | Elaps   | e Time  | Sampling   | Flow Rate | e (m³/min.) | Av. flow              | Total vol.        | Conc.                |
|------------|-----------|-----------|---------------------|----------|-----------|-------------|---------|---------|------------|-----------|-------------|-----------------------|-------------------|----------------------|
| Start Date | Condition | Temp. (K) | Pressure, Pa (mmHg) | Initial  | Final     | weight (g)  | Initial | Final   | Time(hrs.) | Initial   | Final       | (m <sup>3</sup> /min) | (m <sup>3</sup> ) | (μg/m <sup>3</sup> ) |
| 3-Jan-17   | Sunny     | 293.4     | 768.0               | 3.5699   | 3.6958    | 0.1259      | 17597.5 | 17621.5 | 24.0       | 1.23      | 1.23        | 1.23                  | 1770.6            | 71.1                 |
| 9-Jan-17   | Cloudy    | 293.1     | 766.3               | 3.6084   | 3.8376    | 0.2292      | 17621.5 | 17645.5 | 24.0       | 1.23      | 1.23        | 1.23                  | 1769.6            | 129.5                |
| 13-Jan-17  | Cloudy    | 283.4     | 764.7               | 3.5933   | 3.6420    | 0.0487      | 17645.5 | 17669.5 | 24.0       | 1.25      | 1.25        | 1.25                  | 1797.5            | 27.1                 |
| 19-Jan-17  | Cloudy    | 293.5     | 768.8               | 3.6150   | 3.7787    | 0.1637      | 17669.5 | 17693.5 | 24.0       | 1.23      | 1.23        | 1.23                  | 1771.2            | 92.4                 |
| 25-Jan-17  | Sunny     | 292.3     | 772.7               | 3.5654   | 3.7283    | 0.1629      | 17693.5 | 17717.5 | 24.0       | 1.21      | 1.21        | 1.21                  | 1741.2            | 93.6                 |
| 27-Jan-17  | Sunny     | 292.4     | 771.5               | 3.6003   | 3.7198    | 0.1195      | 17717.5 | 17741.5 | 24.0       | 1.21      | 1.21        | 1.21                  | 1739.6            | 68.7                 |
|            |           |           |                     |          |           |             |         |         |            |           |             |                       | Min               | 27.1                 |
|            |           |           |                     |          |           |             |         |         |            |           |             |                       | Max               | 129.5                |
|            |           |           |                     |          |           |             |         |         |            |           |             |                       | Average           | 80.4                 |


#### Location AM3(A) - Holy Trinity Bradbury Centre

| Start Date | Weather   | Air       | Atmospheric         | Filter W | eight (g) | Particulate | Elaps   | e Time  | Sampling   | Flow Rate | e (m³/min.) | Av. flow              | Total vol.        | Conc.         |
|------------|-----------|-----------|---------------------|----------|-----------|-------------|---------|---------|------------|-----------|-------------|-----------------------|-------------------|---------------|
| Start Date | Condition | Temp. (K) | Pressure, Pa (mmHg) | Initial  | Final     | weight (g)  | Initial | Final   | Time(hrs.) | Initial   | Final       | (m <sup>3</sup> /min) | (m <sup>3</sup> ) | $(\mu g/m^3)$ |
| 3-Jan-17   | Cloudy    | 292.2     | 767.3               | 3.5937   | 3.7382    | 0.1445      | 10095.6 | 10119.6 | 24.0       | 1.23      | 1.23        | 1.23                  | 1773.0            | 81.5          |
| 9-Jan-17   | Cloudy    | 292.4     | 766.7               | 3.6164   | 3.7328    | 0.1164      | 10119.6 | 10143.6 | 24.0       | 1.23      | 1.23        | 1.23                  | 1771.8            | 65.7          |
| 13-Jan-17  | Cloudy    | 284.7     | 764.9               | 3.5830   | 3.6493    | 0.0663      | 10143.6 | 10167.6 | 24.0       | 1.25      | 1.25        | 1.25                  | 1793.4            | 37.0          |
| 19-Jan-17  | Cloudy    | 294.4     | 767.4               | 3.5658   | 3.7246    | 0.1588      | 10167.6 | 10191.6 | 24.0       | 1.23      | 1.23        | 1.23                  | 1766.5            | 89.9          |
| 25-Jan-17  | Sunny     | 292.7     | 771.5               | 3.5683   | 3.7139    | 0.1456      | 10191.6 | 10215.6 | 24.0       | 1.21      | 1.21        | 1.21                  | 1742.3            | 83.6          |
| 27-Jan-17  | Sunny     | 293.3     | 770.5               | 3.6430   | 3.7571    | 0.1141      | 10215.6 | 10239.6 | 24.0       | 1.21      | 1.21        | 1.21                  | 1739.6            | 65.6          |
|            |           |           |                     |          |           |             |         |         |            |           |             |                       | Min               | 37.0          |
|            |           |           |                     |          |           |             |         |         |            |           |             |                       | Max               | 89.9          |
|            |           |           |                     |          |           |             |         |         |            |           |             |                       | Average           | 70.5          |


#### Location AM5(A) - Po Leung Kuk Ngan Po Ling College

| Start Date | Weather   | Air       | Atmospheric         | Filter W | eight (g) | Particulate | Elaps   | e Time | Sampling   | Flow Rate | e (m³/min.) | Av. flow              | Total vol.        | Conc.         |
|------------|-----------|-----------|---------------------|----------|-----------|-------------|---------|--------|------------|-----------|-------------|-----------------------|-------------------|---------------|
| Start Date | Condition | Temp. (K) | Pressure, Pa (mmHg) | Initial  | Final     | weight (g)  | Initial | Final  | Time(hrs.) | Initial   | Final       | (m <sup>3</sup> /min) | (m <sup>3</sup> ) | $(\mu g/m^3)$ |
| 3-Jan-17   | Cloudy    | 293.6     | 768.3               | 3.5781   | 3.6338    | 0.0557      | 2667.1  | 2691.1 | 24.0       | 1.23      | 1.23        | 1.23                  | 1765.8            | 31.5          |
| 9-Jan-17   | Cloudy    | 293.1     | 765.8               | 3.5888   | 3.6733    | 0.0845      | 2691.1  | 2715.1 | 24.0       | 1.23      | 1.23        | 1.23                  | 1764.5            | 47.9          |
| 13-Jan-17  | Cloudy    | 285.4     | 765.9               | 3.5824   | 3.6152    | 0.0328      | 2715.1  | 2739.1 | 24.0       | 1.24      | 1.24        | 1.24                  | 1786.5            | 18.4          |
| 19-Jan-17  | Cloudy    | 293.4     | 769.4               | 3.5690   | 3.6451    | 0.0761      | 2739.1  | 2763.1 | 24.0       | 1.23      | 1.23        | 1.23                  | 1767.5            | 43.1          |
| 25-Jan-17  | Sunny     | 291.9     | 772.7               | 3.5637   | 3.6287    | 0.0650      | 2763.1  | 2787.1 | 24.0       | 1.21      | 1.21        | 1.21                  | 1740.7            | 37.3          |
| 27-Jan-17  | Sunny     | 293.8     | 771.7               | 3.6322   | 3.6892    | 0.0570      | 2787.1  | 2811.1 | 24.0       | 1.20      | 1.20        | 1.20                  | 1734.4            | 32.9          |
|            |           |           |                     |          |           |             |         |        |            |           |             |                       | Min               | 18.4          |
|            |           |           |                     |          |           |             |         |        |            |           |             |                       | Max               | 47.9          |
|            |           |           |                     |          |           |             |         |        |            |           |             |                       | Average           | 35.2          |

MA13056/App F - 24hr TSP

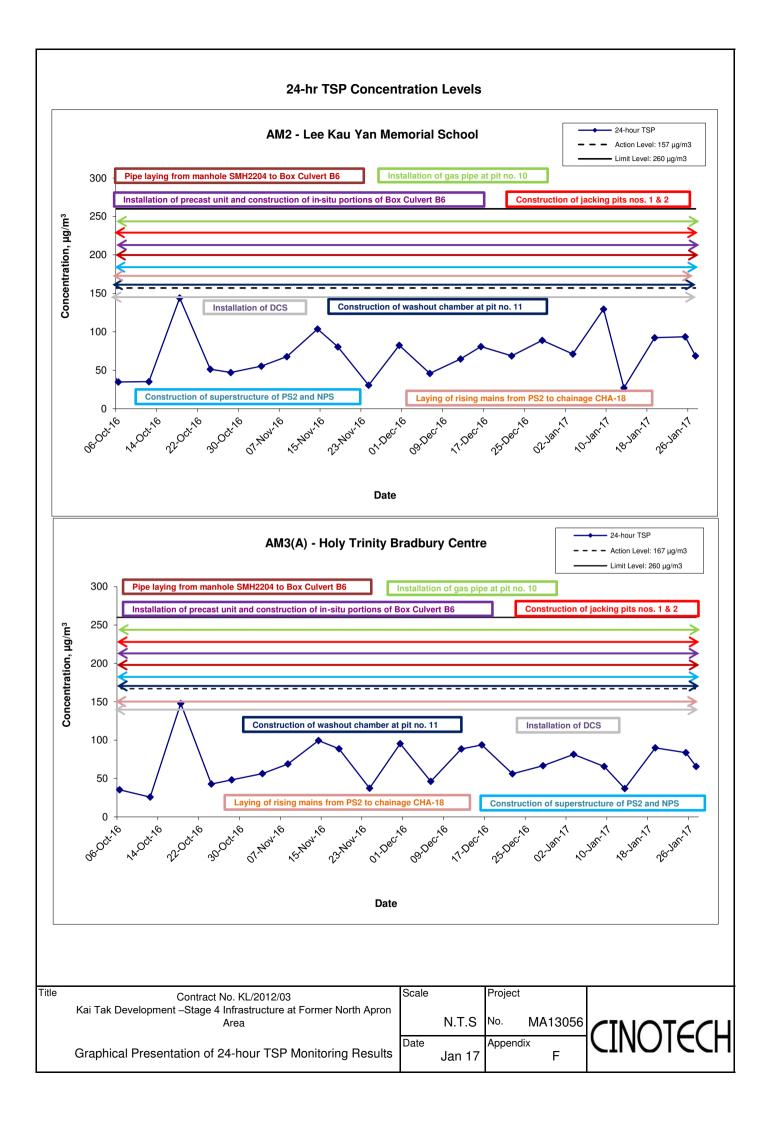

#### 24-hr TSP Concentration Levels

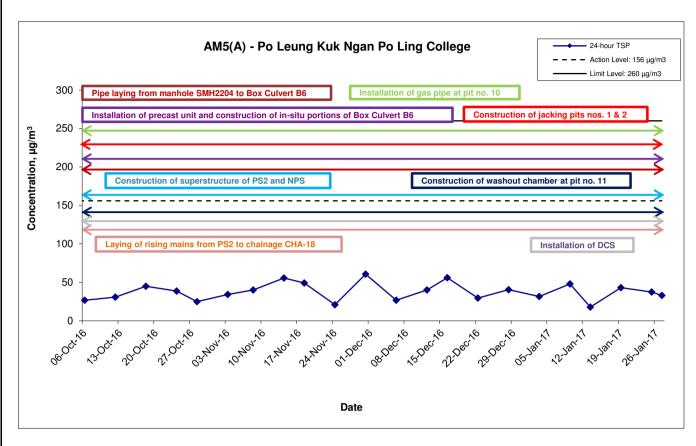

Title Contract No. KL/2012/03
Kai Tak Development –Stage 4 Infrastructure at Former North Apron
Area

Graphical Presentation of 24-hour TSP Monitoring Results

Scale Project
N.T.S No. MA13056

Date Jan 17 Appendix F



APPENDIX G NOISE MONITORING RESULTS AND GRAPHICAL PRESENTATION

#### Appendix G - Noise Monitoring Results

| Location M6(A | Location M6(A) - Oblate Primary School |         |                                                          |                       |      |                 |                          |  |  |  |  |  |  |
|---------------|----------------------------------------|---------|----------------------------------------------------------|-----------------------|------|-----------------|--------------------------|--|--|--|--|--|--|
|               |                                        |         |                                                          | Unit: dB (A) (30-min) |      |                 |                          |  |  |  |  |  |  |
| Date          | Time                                   | Weather | Measured Noise Level Baseline Level Construction Noise L |                       |      |                 |                          |  |  |  |  |  |  |
|               |                                        |         | L <sub>eq</sub>                                          | L <sub>10</sub>       | L 90 | L <sub>eq</sub> | L <sub>eq</sub>          |  |  |  |  |  |  |
| 5-Jan-17      | 9:35                                   | Cloudy  | 61.8                                                     | 64.3                  | 58.2 |                 | 61.8 Measured ≤ Baseline |  |  |  |  |  |  |
| 9-Jan-17      | 11:00                                  | Cloudy  | 68.2                                                     | 70.9                  | 63.9 | 63.9            | 66.2                     |  |  |  |  |  |  |
| 17-Jan-17     | 9:00                                   | Sunny   | 57.9                                                     | 59.2                  | 56.0 | 03.9            | 57.9 Measured ≤ Baseline |  |  |  |  |  |  |
| 23-Jan-17     | 16:00                                  | Sunny   | 57.4                                                     | 59.1                  | 54.1 |                 | 57.4 Measured ≤ Baseline |  |  |  |  |  |  |


| Location M7 | Location M7 - CCC Kei To Secondary School |         |                 |                                                              |      |                    |                          |  |  |  |  |  |  |
|-------------|-------------------------------------------|---------|-----------------|--------------------------------------------------------------|------|--------------------|--------------------------|--|--|--|--|--|--|
|             |                                           |         |                 |                                                              | Uni  | t: dB (A) (30-min) |                          |  |  |  |  |  |  |
| Date        | Time                                      | Weather | Mea             | Measured Noise Level Baseline Level Construction Noise Level |      |                    |                          |  |  |  |  |  |  |
|             |                                           |         | L <sub>eq</sub> | L <sub>10</sub>                                              | L 90 | L <sub>eq</sub>    | L <sub>eq</sub>          |  |  |  |  |  |  |
| 5-Jan-17    | 10:15                                     | Sunny   | 70.0            | 74.3                                                         | 62.7 |                    | 64.1                     |  |  |  |  |  |  |
| 9-Jan-17    | 10:00                                     | Cloudy  | 62.7            | 63.7                                                         | 59.9 | CO 7               | 62.7 Measured ≤ Baseline |  |  |  |  |  |  |
| 17-Jan-17   | 9:30                                      | Sunny   | 68.6            | 70.8                                                         | 64.8 | 68.7               | 68.6 Measured ≤ Baseline |  |  |  |  |  |  |
| 23-Jan-17   | 16:00                                     | Sunny   | 67.7            | 69.6                                                         | 65.2 |                    | 67.7 Measured ≤ Baseline |  |  |  |  |  |  |


| Location M8 - | Location M8 - Po Leung Kuk Ngan Po Ling College |         |                                                             |                       |      |                 |                          |  |  |  |  |  |  |
|---------------|-------------------------------------------------|---------|-------------------------------------------------------------|-----------------------|------|-----------------|--------------------------|--|--|--|--|--|--|
|               |                                                 |         |                                                             | Unit: dB (A) (30-min) |      |                 |                          |  |  |  |  |  |  |
| Date          | Time                                            | Weather | Measured Noise Level Baseline Level Construction Noise Leve |                       |      |                 |                          |  |  |  |  |  |  |
|               |                                                 |         | L <sub>eq</sub>                                             | L <sub>10</sub>       | L 90 | L <sub>eq</sub> | L <sub>eq</sub>          |  |  |  |  |  |  |
| 4-Jan-17      | 9:10                                            | Sunny   | 66.2                                                        | 68.4                  | 60.7 |                 | 64.2                     |  |  |  |  |  |  |
| 10-Jan-17     | 10:00                                           | Cloudy  | 65.2                                                        | 67.8                  | 61.7 | 61.9            | 62.5                     |  |  |  |  |  |  |
| 16-Jan-17     | 13:20                                           | Cloudy  | 62.4                                                        | 64.1                  | 58.3 | 01.9            | 52.8                     |  |  |  |  |  |  |
| 26-Jan-17     | 13:18                                           | Sunny   | 61.0                                                        | 63.6                  | 57.5 |                 | 61.0 Measured ≤ Baseline |  |  |  |  |  |  |

| Location M9 | Location M9 - Tak Long Estate |         |                 |                       |       |                     |                          |  |
|-------------|-------------------------------|---------|-----------------|-----------------------|-------|---------------------|--------------------------|--|
|             |                               |         |                 | Unit: dB (A) (30-min) |       |                     |                          |  |
| Date        | Time                          | Weather | Mea             | sured Noise           | Level | Baseline Level      | Construction Noise Level |  |
|             |                               |         | L <sub>eq</sub> | L <sub>10</sub>       | L 90  | L <sub>eq</sub>     | L <sub>eq</sub>          |  |
| 3-Jan-17    | 13:20                         | Sunny   | 59.4            | 61.6                  | 55.9  | 59.4 Measured ≤ Bas |                          |  |
| 12-Jan-17   | 13:30                         | Cloudy  | 62.3            | 64.6                  | 59.9  | 59.9                | 58.6                     |  |
| 18-Jan-17   | 13:10                         | Cloudy  | 63.6            | 65.3                  | 60.5  | 61.2                |                          |  |
| 23-Jan-17   | 9:15                          | Sunny   | 64.5            | 66.4                  | 62.3  |                     | 62.7                     |  |

MA13056/App G - Noise Cinotech


#### **Noise Levels**

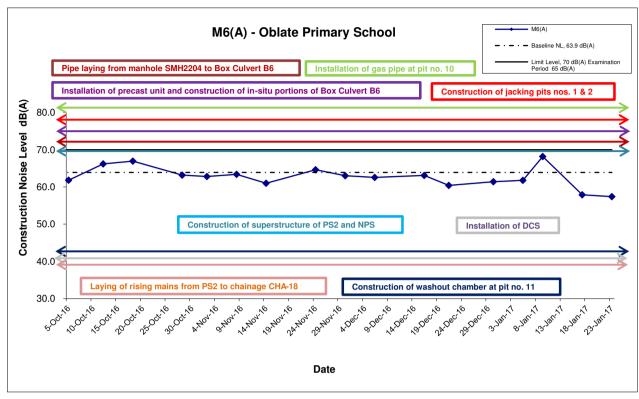

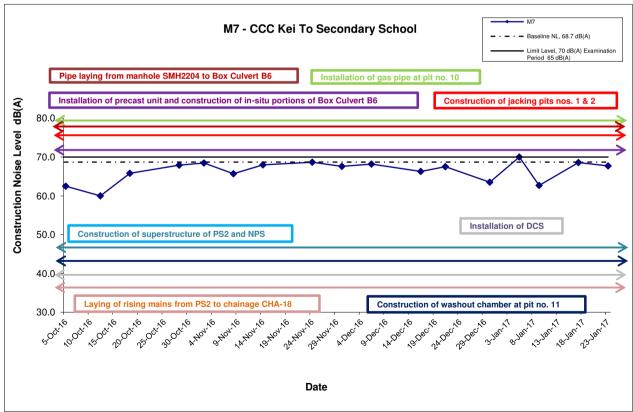


Remarks: The construction noise levels in the Tables in Appendix G were adopted for plotting the graphs

| Title | Contract No. KL/2012/03                                           | Scale |        | Project  |          |
|-------|-------------------------------------------------------------------|-------|--------|----------|----------|
|       | Kai Tak Development –Stage 4 Infrastructure at Former North Apron |       |        | No.      | CTUATELL |
|       | Area                                                              |       | N.T.S  | MA13056  |          |
|       | Graphical Presentation of Construction Noise Monitoring           | Date  |        | Appendix |          |
|       | Results                                                           |       | Jan 17 | G        |          |

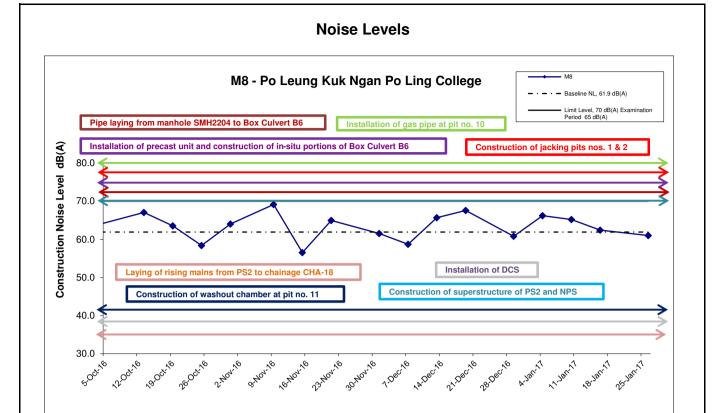

Date

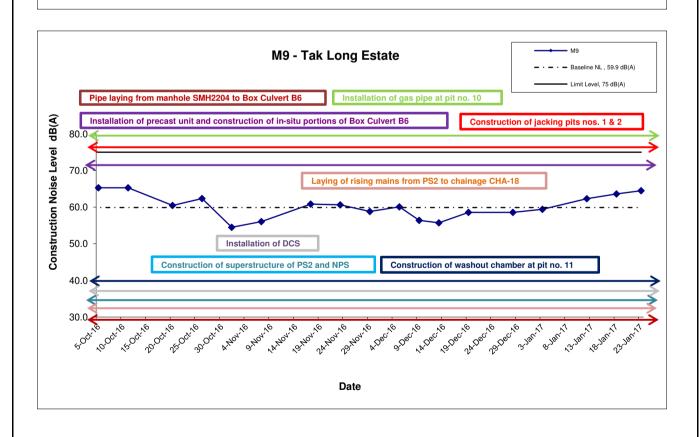

Remarks: The construction noise levels in the Tables in Appendix G were adopted for plotting the graphs

Title Contract No. KL/2012/03
Kai Tak Development –Stage 4 Infrastructure at Former North Apron Area

Graphical Presentation of Construction Noise Monitoring Results

Scale Project No.
N.T.S MA13056

Date Jan 17

G



#### APPENDIX H SUMMARY OF EXCEEDANCE

#### Contract No. KL/2012/03 Kai Tak Development –Stage 4 Infrastructure at Former North Apron Area

#### Appendix H – Summary of Exceedance

Exceedance Report for Contract No. KL/2012/03

- (A) Exceedance Report for Air Quality (NIL in the reporting month)
- (B) Exceedance Report for Construction Noise (NIL in the reporting month)
- (C) Exceedance Report for Landscape and Visual (NIL in the reporting month)

#### APPENDIX I SITE AUDIT SUMMARY

| Checklist Reference Number | 170106         |
|----------------------------|----------------|
| Date                       | 6 January 2017 |
| Time                       | 13:30-15:30    |

|          |                                                                                                                                            | Related |
|----------|--------------------------------------------------------------------------------------------------------------------------------------------|---------|
| Ref. No. | Non-Compliance                                                                                                                             | Item No |
| **       | None identified                                                                                                                            |         |
|          |                                                                                                                                            | Related |
| Ref. No. | Remarks/Observations                                                                                                                       | Item No |
|          | B. Water Quality                                                                                                                           |         |
|          | No environmental deficiency was identified during site inspection.                                                                         |         |
|          | C. Air Quality                                                                                                                             | <u></u> |
|          | No environmental deficiency was identified during site inspection.                                                                         |         |
|          | D. Noise                                                                                                                                   |         |
|          | No environmental deficiency was identified during site inspection.                                                                         |         |
|          | E. Waste / Chemical Management                                                                                                             |         |
|          | No environmental deficiency was identified during site inspection.                                                                         |         |
|          | F. Visual and Landscape                                                                                                                    |         |
|          | No environmental deficiency was identified during site inspection.                                                                         |         |
|          | G. Permits /Licences                                                                                                                       |         |
|          | No environmental deficiency was identified during site inspection.                                                                         |         |
|          | H. Others                                                                                                                                  |         |
|          | Follow-up on previous audit section (Ref. No.: 161229), all environmental deficiencies were observed rectified/improved by the Contractor. |         |

|             | Name               | Signature | Date           |
|-------------|--------------------|-----------|----------------|
| Recorded by | Carrie Leung       | (0        | 6 January 2017 |
| Checked by  | Dr. Priscilla Choy | N.Z.      | 6 January 2017 |

#### Contract No. KL/2012/03

#### Kai Tak Development - Stage 4 Infrastructure at Former North Apron Area EP-337/2009 - New Distributor Roads serving the Planned Kai Tak Development

| Checklist Reference Number | 170113          |
|----------------------------|-----------------|
| Date                       | 13 January 2017 |
| Time                       | 10:00-12:00     |

| D 4 N      |                                                                                | Related  |
|------------|--------------------------------------------------------------------------------|----------|
| Ref. No.   | Non-Compliance                                                                 | Item No. |
| =          | None identified                                                                | _        |
|            |                                                                                | Related  |
| Ref. No.   | Remarks/Observations                                                           | Item No. |
|            | B. Water Quality                                                               |          |
|            | No environmental deficiency was identified during site inspection.             |          |
|            | C. Air Quality                                                                 |          |
|            | No environmental deficiency was identified during site inspection.             |          |
|            | D. Noise                                                                       |          |
|            | No environmental deficiency was identified during site inspection.             |          |
|            | E. Waste / Chemical Management                                                 |          |
| 170113-O01 | Drip tray should be provided to chemical containers.                           | E 9      |
|            | F. Visual and Landscape                                                        |          |
|            | No environmental deficiency was identified during site inspection.             |          |
|            | G. Permits /Licences                                                           |          |
|            | No environmental deficiency was identified during site inspection.             |          |
|            | H. Others                                                                      |          |
|            | Follow-up on previous audit section (Ref. No.: 170106), no major environmental |          |
|            | deficiencies were observed during the site inspection.                         |          |

|             | Name               | Signature | Date            |
|-------------|--------------------|-----------|-----------------|
| Recorded by | Carrie Leung       | 0 .       | 13 January 2017 |
| Checked by  | Dr. Priscilla Choy | N.J.      | 13 January 2017 |

# Contract No. KL/2012/03 Kai Tak Development - Stage 4 Infrastructure at Former North Apron Area EP-337/2009 - New Distributor Roads serving the Planned Kai Tak Development

| Checklist Reference Number | 170118          |  |
|----------------------------|-----------------|--|
| Date                       | 18 January 2017 |  |
| Time                       | 14:00-17:00     |  |

| Ref. No. | Non-Compliance                                                                                                                               | Related<br>Item No. |
|----------|----------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| м        | None identified                                                                                                                              | _                   |
| Ref. No. | Remarks/Observations                                                                                                                         | Related<br>Item No  |
|          | B. Water Quality                                                                                                                             |                     |
|          | No environmental deficiency was identified during site inspection.                                                                           |                     |
|          | C. Air Quality                                                                                                                               |                     |
|          | No environmental deficiency was identified during site inspection.                                                                           |                     |
|          | D. Noise                                                                                                                                     |                     |
|          | No environmental deficiency was identified during site inspection.                                                                           |                     |
|          | E. Waste / Chemical Management                                                                                                               |                     |
|          | No environmental deficiency was identified during site inspection.                                                                           |                     |
|          | F. Visual and Landscape                                                                                                                      |                     |
|          | No environmental deficiency was identified during site inspection.                                                                           |                     |
|          | G. Permits /Licences                                                                                                                         |                     |
|          | No environmental deficiency was identified during site inspection.                                                                           |                     |
|          | H. Others                                                                                                                                    |                     |
|          | • Follow-up on previous audit section (Ref. No.: 170113), all environmental deficiencies were observed rectified/improved by the Contractor. |                     |

|             | Name               | Signature | Date            |
|-------------|--------------------|-----------|-----------------|
| Recorded by | Carrie Leung       | (b = =    | 18 January 2017 |
| Checked by  | Dr. Priscilla Choy | 55        | 18 January 2017 |
|             |                    | '         |                 |

#### Contract No. KL/2012/03

# Kai Tak Development - Stage 4 Infrastructure at Former North Apron Area EP-337/2009 - New Distributor Roads serving the Planned Kai Tak Development

| Checklist Reference Number | 170126          |
|----------------------------|-----------------|
| Date                       | 26 January 2017 |
| Time                       | 10:00-12:00     |

|          |                                                                                | Related  |
|----------|--------------------------------------------------------------------------------|----------|
| Ref. No. | Non-Compliance                                                                 | Item No. |
| -        | None identified                                                                | -        |
|          |                                                                                | Related  |
| Ref. No. | Remarks/Observations                                                           | Item No. |
|          | B. Water Quality                                                               |          |
|          | No environmental deficiency was identified during site inspection.             |          |
|          | C. Air Quality                                                                 |          |
|          | No environmental deficiency was identified during site inspection.             |          |
|          | D. Noise                                                                       |          |
|          | No environmental deficiency was identified during site inspection.             |          |
|          | E. Waste / Chemical Management                                                 |          |
|          | No environmental deficiency was identified during site inspection.             |          |
|          | F. Visual and Landscape                                                        |          |
|          | No environmental deficiency was identified during site inspection.             |          |
|          | G. Permits /Licences                                                           |          |
|          | No environmental deficiency was identified during site inspection.             |          |
|          | H. Others                                                                      |          |
|          | Follow-up on previous audit section (Ref. No.: 170118), no major environmental |          |
|          | deficiencies were observed during the site inspection.                         |          |

|             | Name               | Signature | Date            |
|-------------|--------------------|-----------|-----------------|
| Recorded by | Carrie Leung       | (2 ° e    | 26 January 2017 |
| Checked by  | Dr. Priscilla Choy | Nih       | 26 January 2017 |
|             | ····               |           |                 |

| Checklist Reference Number | 170106         |
|----------------------------|----------------|
| Date                       | 6 January 2017 |
| Time                       | 13:30-15:30    |

|          |                                                                                  | Related  |
|----------|----------------------------------------------------------------------------------|----------|
| Ref. No. | Non-Compliance                                                                   | Item No. |
| -        | None identified                                                                  | -        |
|          |                                                                                  | Related  |
| Ref. No. | Remarks/Observations                                                             | Item No. |
|          | B. Water Quality                                                                 |          |
|          | No environmental deficiency was identified during site inspection.               |          |
|          | C. Air Quality                                                                   |          |
|          | No environmental deficiency was identified during site inspection.               |          |
|          | D. Noise                                                                         |          |
|          | No environmental deficiency was identified during site inspection.               |          |
|          | E. Waste / Chemical Management                                                   |          |
|          | No environmental deficiency was identified during site inspection.               |          |
|          | F. Visual and Landscape                                                          |          |
|          | No environmental deficiency was identified during site inspection.               |          |
|          | G. Permits /Licences                                                             |          |
|          | No environmental deficiency was identified during site inspection.               |          |
|          | H. Others                                                                        |          |
|          | • Follow-up on previous audit section (Ref. No.: 161229), no major environmental |          |
|          | deficiencies were observed during the site inspection.                           |          |

|             | Name               | Signature | Date           |
|-------------|--------------------|-----------|----------------|
| Recorded by | Carrie Leung       | 6-8       | 6 January 2017 |
| Checked by  | Dr. Priscilla Choy | WI        | 6 January 2017 |

| Checklist Reference Number | 170113          |
|----------------------------|-----------------|
| Date                       | 13 January 2017 |
| Time                       | 10:00-12:00     |

| Ref. No.  | Non Compliance                                                                   | Related   |
|-----------|----------------------------------------------------------------------------------|-----------|
| Kel. Ivo. | Non-Compliance None identified                                                   | mem ivo   |
|           | ivone identified                                                                 | Related   |
| Ref. No.  | Remarks/Observations                                                             | Item No   |
| Kei. No.  | B. Water Quality                                                                 | RECHI INU |
|           | No environmental deficiency was identified during site inspection.               |           |
|           | No environmental deficiency was identified during site inspection,               |           |
|           | C. Air Quality                                                                   |           |
|           | No environmental deficiency was identified during site inspection.               |           |
|           | D. Noise                                                                         |           |
|           | No environmental deficiency was identified during site inspection.               |           |
|           | E. Waste / Chemical Management                                                   |           |
|           | No environmental deficiency was identified during site inspection.               |           |
|           | F. Visual and Landscape                                                          |           |
|           | No environmental deficiency was identified during site inspection.               |           |
|           | G. Permits /Licences                                                             |           |
|           | No environmental deficiency was identified during site inspection.               |           |
|           | H. Others                                                                        |           |
|           | • Follow-up on previous audit section (Ref. No.: 170106), no major environmental |           |
|           | deficiencies were observed during the site inspection.                           |           |

|             | Name               | Şignature | Date            |
|-------------|--------------------|-----------|-----------------|
| Recorded by | Carrie Leung       | 6         | 13 January 2017 |
| Checked by  | Dr. Priscilla Choy | Ni        | 13 January 2017 |

## Contract No. KL/2012/03 Kai Tak Development - Stage 4 Infrastructure at Former North Apron Area EP-344/2009 - New Sewage Pumping Stations serving Kai Tak Development

# Weekly Site Inspection Record Summary Inspection Information

| Checklist Reference Number | 170118          |  |
|----------------------------|-----------------|--|
| Date                       | 18 January 2017 |  |
| Time                       | 14:00-17:00     |  |

| Ref. No.   | Non Compliance                                                                   | Related |
|------------|----------------------------------------------------------------------------------|---------|
| Kei. No.   | Non-Compliance None identified                                                   | Item No |
|            | None identified                                                                  |         |
| Ref. No.   | Remarks/Observations                                                             | Related |
| IXC1. 1(0. | B. Water Quality                                                                 | Item No |
|            |                                                                                  |         |
|            | No environmental deficiency was identified during site inspection.               |         |
|            | C. Air Quality                                                                   |         |
|            | No environmental deficiency was identified during site inspection.               |         |
|            | D. Noise                                                                         |         |
|            | No environmental deficiency was identified during site inspection.               |         |
|            | E. Waste / Chemical Management                                                   |         |
|            | No environmental deficiency was identified during site inspection.               |         |
|            | F. Visual and Landscape                                                          |         |
|            | No environmental deficiency was identified during site inspection.               |         |
| A11.4.5    | G. Permits /Licences                                                             |         |
|            | No environmental deficiency was identified during site inspection.               |         |
| <u></u>    | H. Others                                                                        |         |
|            | • Follow-up on previous audit section (Ref. No.: 170113), no major environmental |         |
|            | deficiencies were observed during the site inspection.                           |         |

|             | Name               | Signature | Date            |
|-------------|--------------------|-----------|-----------------|
| Recorded by | Carrie Leung       | (ba       | 18 January 2017 |
| Checked by  | Dr. Priscilla Choy | NV        | 18 January 2017 |

### Contract No. KL/2012/03

# Kai Tak Development - Stage 4 Infrastructure at Former North Apron Area EP-344/2009 - New Sewage Pumping Stations serving Kai Tak Development

# Weekly Site Inspection Record Summary Inspection Information

| Checklist Reference Number | 170126          |  |
|----------------------------|-----------------|--|
| Date                       | 26 January 2017 |  |
| Time                       | 10:00-12:00     |  |

|            |                                                                                  | Related             |
|------------|----------------------------------------------------------------------------------|---------------------|
| Ref. No.   | Non-Compliance                                                                   | Item No.            |
| -          | None identified                                                                  | -                   |
| D.C.N.     | Remarks/Observations                                                             | Related<br>Item No. |
| Ref. No.   |                                                                                  | Henri Ro.           |
|            | B. Water Quality                                                                 |                     |
|            | No environmental deficiency was identified during site inspection.               |                     |
|            | C. Air Quality                                                                   |                     |
|            | No environmental deficiency was identified during site inspection.               |                     |
|            | D. Noise                                                                         |                     |
|            | No environmental deficiency was identified during site inspection.               |                     |
|            | E. Waste / Chemical Management                                                   |                     |
| 160126-O01 | Oil stain should be removed as chemical waste. (near PS2)                        | E 8                 |
|            | F. Visual and Landscape                                                          |                     |
|            | No environmental deficiency was identified during site inspection.               |                     |
|            | G. Permits /Licences                                                             |                     |
|            | No environmental deficiency was identified during site inspection.               |                     |
|            | H. Others                                                                        |                     |
|            | • Follow-up on previous audit section (Ref. No.: 170118), no major environmental |                     |
|            | deficiencies were observed during the site inspection.                           |                     |

|             | Name               | Signature | Date            |
|-------------|--------------------|-----------|-----------------|
| Recorded by | Carrie Leung       | (b) = e   | 26 January 2017 |
| Checked by  | Dr. Priscilla Choy | WF        | 26 January 2017 |

### APPENDIX J EVENT ACTION PLANS

## Event/Action Plan for Air Quality

| EVENT              |                                            | ACTION                                |                                   |                                       |  |
|--------------------|--------------------------------------------|---------------------------------------|-----------------------------------|---------------------------------------|--|
|                    | ET                                         | IEC                                   | ER                                | CONTRACTOR                            |  |
| Action Level being | 1. Identify source and investigate the     | 1. Check monitoring data submitted    | 1. Notify Contractor.             | 1. Rectify any unacceptable practice; |  |
| exceeded by        | causes of exceedance;                      | by ET;                                |                                   | 2. Amend working methods if           |  |
| one sampling       | 2. Inform Contactor, IEC and ER;           | 2. Check Contractor's working         |                                   | appropriate.                          |  |
|                    | 3. Repeat measurement to confirm finding.  | method.                               |                                   |                                       |  |
| Action Level being | I. Identify source and investigate the     | 1. Check monitoring data submitted    | Confirm receipt of notification   | 1. Discuss with ET and IEC on proper  |  |
| exceeded by        | causes of exceedance;                      | by ET;                                | of exceedance in writing;         | remedial actions;                     |  |
| two or more        | 2. Inform Contractor, IEC and ER;          | 2. Check Contractor's working         | 2. Notify Contractor;             | 2. Submit proposals for remedial      |  |
| consecutive        | 3. Increase monitoring frequency to daily; | method;                               | 3. In consolidation with the IEC, | actions to ER and IEC within three    |  |
| sampling           | 4. Discuss with IEC and Contractor on      | 3. Discuss with ET and Contractor on  | agree with the Contractor on the  | working days of notification;         |  |
|                    | remedial actions required;                 | possible remedial measures;           | remedial measures to be           | 3. Implement the agreed proposals;    |  |
|                    | 5. Assess the effectiveness of             | 4. Advise the ER on the effectiveness | implemented;                      | 4. Amend proposal if appropriate.     |  |
|                    | Contractor's remedial actions;             | of the proposed remedial measures.    | 4. Supervise implementation of    |                                       |  |
|                    | 6. If exceedance continues, arrange        |                                       | remedial measures;                |                                       |  |
|                    | meeting with IEC and ER;                   |                                       | 5. Conduct meeting with ET and    |                                       |  |
|                    | 7. If exceedance stops, cease additional   |                                       | IEC if exceedance continues.      |                                       |  |
|                    | monitoring.                                |                                       |                                   |                                       |  |
| Limit Level being  | 1. Identify source and investigate the     | Check monitoring data submitted       | Confirm receipt of notification   | Take immediate action to avoid        |  |
| exceeded by        | causes of exceedance;                      | by ET;                                | of exceedance in writing;         | further exceedance;                   |  |
| one sampling       | 2. Inform Contractor, IEC, ER, and EPD;    | 2. Check Contractor's working         | 2. Notify Contractor;             | 2. Discuss with ET and IEC on proper  |  |
|                    | 3. Repeat measurement to confirm finding;  | method;                               | 3. In consolidation with the IEC, | remedial actions;                     |  |
|                    | 4. Assess effectiveness of                 | 3. Discuss with ET and Contractor on  | agree with the Contractor on the  | 3. Submit proposals for remedial      |  |
|                    | Contractor's remedial actions and keep     | possible remedial measures;           | remedial measures to be           | actions to ER and IEC within three    |  |

|                   | EPD, IEC and ER informed of               | 4. Advise the ER on the                    | implemented;                      | working days of notification;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-------------------|-------------------------------------------|--------------------------------------------|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                   | the results.                              | effectiveness of the proposed              | 4. Supervise implementation of    | 4. Implement the agreed proposals.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|                   |                                           | remedial measures.                         | remedial measures;                | , , , , , , , , , , , , , , , , , , ,                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|                   |                                           |                                            | 5. Conduct meeting with ET and    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                   |                                           |                                            | IEC if exceedance continues.      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| 12-21             | 4 Notify IEO ED Controllers of            | 4. Oh o ha o o o'ha i o o dala a ha o'ha d |                                   | 4 Tallaction of Pater and |
| Limit Level being | Notify IEC, ER, Contractor and            | Check monitoring data submitted            | Confirm receipt of notification   | Take immediate action to avoid                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| exceeded by       | EPD;                                      | by ET;                                     | of exceedance in writing;         | further exceedance;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| two or more       | 2. Repeat measurement to confirm          | 2. Check Contractor's working              | 2. Notify Contractor;             | 2. Discuss with ET, ER and IEC on                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| consecutive       | findings;                                 | method;                                    | 3. In consolidation with the IEC, | proper remedial actions;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| sampling          | 3. Carry out analysis of Contractor's     | 3. Discuss amongst ER, ET, and             | agree with the Contractor on the  | 3. Submit proposals for remedial                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|                   | working procedures to identify source and | Contractor on the potential remedial       | remedial measures to be           | actions to IEC within three working                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|                   | investigate the causes of exceedance;     | actions;                                   | implemented;                      | days of notification;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|                   | 4. Increase monitoring frequency to       | 4. Review Contractor's remedial            | 4. Supervise implementation of    | 4. Implement the agreed proposals;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|                   | daily;                                    | actions whenever necessary to              | remedial measures;                | 5. Submit further remedial actions if                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|                   | 5. Arrange meeting with IEC, ER           | assure their effectiveness and             | 5. If exceedance continues,       | problem still not under control;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|                   | and Contractor to discuss the             | advise the ER accordingly.                 | consider stopping the Contractor  | 6. Stop the relevant portion of works                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|                   | remedial actions to be taken;             |                                            | to continue working on that       | as instructed by the ER until the                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|                   | 6. Assess effectiveness of                |                                            | portion of work which causes the  | exceedance is abated.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|                   | Contractor's remedial actions and         |                                            | exceedance until the              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                   | keep EPD, IEC and ER informed             |                                            | exceedance is abated.             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                   | of the results;                           |                                            |                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                   | 7. If exceedance stops, cease additional  |                                            |                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                   | monitoring.                               |                                            |                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

## Event/Action Plan for Construction Noise

| EVENT        | ACTION                                 |                                   |                              |                                   |  |  |
|--------------|----------------------------------------|-----------------------------------|------------------------------|-----------------------------------|--|--|
|              | ET                                     | IEC                               | ER                           | CONTRACTOR                        |  |  |
| Action Level | 1. Notify ER, IEC and Contractor;      | Review the investigation          | Confirm receipt of           | 1. Submit noise mitigation        |  |  |
| being        | 2. Carry out investigation;            | results submitted by the ET;      | notification of failure in   | proposals to IEC and ER;          |  |  |
| exceeded     | 3. Report the results of investigation | 2. Review the proposed remedial   | writing;                     | 2. Implement noise mitigation     |  |  |
|              | to the IEC, ER and Contractor;         | measures by the Contractor and    | 2. Notify Contractor;        | proposals.                        |  |  |
|              | 4. Discuss with the IEC and            | advise the ER accordingly;        | 3. In consolidation with the | (The above actions should be      |  |  |
|              | Contractor on remedial measures        | 3. Advise the ER on the           | IEC, agree with the          | taken within 2 working days after |  |  |
|              | required;                              | effectiveness of the proposed     | Contractor on the remedial   | the exceedance is identified)     |  |  |
|              | 5. Increase monitoring frequency to    | remedial measures.                | measures to be implemented;  |                                   |  |  |
|              | check mitigation effectiveness.        | (The above actions should be      | 4. Supervise the             |                                   |  |  |
|              | (The above actions should be taken     | taken within 2 working days after | implementation of remedial   |                                   |  |  |
|              | within 2 working days after the        | the exceedance is identified)     | measures.                    |                                   |  |  |
|              | exceedance is identified)              |                                   | (The above actions should be |                                   |  |  |
|              |                                        |                                   | taken within 2 working days  |                                   |  |  |
|              |                                        |                                   | after the exceedance is      |                                   |  |  |
|              |                                        |                                   | identified)                  |                                   |  |  |
| Limit Level  | 1. Inform IEC, ER, Contractor and      | 1. Discuss amongst ER, ET, and    | 1. Confirm receipt of        | 1. Take immediate action to       |  |  |
| being        | EPD;                                   | Contractor on the potential       | notification of failure in   | avoid further exceedance;         |  |  |
| exceeded     | 2. Repeat measurements to confirm      | remedial actions;                 | writing;                     | 2. Submit proposals for remedial  |  |  |
|              | findings;                              | 2. Review Contractor's remedial   | 2. Notify Contractor;        | actions to IEC and ER within 3    |  |  |
|              | 3. Increase monitoring frequency;      | actions whenever necessary to     | 3. In consolidation with the | working days of notification;     |  |  |
|              | 4. Identify source and investigate the | assure their effectiveness and    | IEC, agree with the          | 3. Implement the agreed           |  |  |
|              | cause of exceedance;                   | advise the ER accordingly.        | Contractor on the remedial   | proposals;                        |  |  |

| 5. Carry out analysis of Contractor's | (The above actions should be      | measures to be implemented;  | 4. Submit further proposal if     |
|---------------------------------------|-----------------------------------|------------------------------|-----------------------------------|
| working procedures;                   | taken within 2 working days after | 4. Supervise the             | problem still not under control;  |
| 6. Discuss with the IEC, Contractor   | the exceedance is identified)     | implementation of remedial   | 5. Stop the relevant portion of   |
| and ER on remedial measures           |                                   | measures;                    | works as instructed by the ER     |
| required;                             |                                   | 5. If exceedance continues,  | until the exceedance is abated.   |
| 7. Assess effectiveness of            |                                   | consider stopping the        | (The above actions should be      |
| Contractor's remedial actions and     |                                   | Contractor to continue       | taken within 2 working days after |
| keep IEC, EPD and ER informed of      |                                   | working on that portion of   | the exceedance is identified)     |
| the results;                          |                                   | work which causes the        |                                   |
| 8. If exceedance stops, cease         |                                   | exceedance until the         |                                   |
| additional monitoring.                |                                   | exceedance is abated.        |                                   |
| (The above actions should be taken    |                                   | (The above actions should be |                                   |
| within 2 working days after the       |                                   | taken within 2 working days  |                                   |
| exceedance is identified)             |                                   | after the exceedance is      |                                   |
|                                       |                                   | identified)                  |                                   |

## Event/Action Plan for Landscape and Visual

| EVENT                          | ACTION                                        |                                                      |                                                             |                                                                       |  |
|--------------------------------|-----------------------------------------------|------------------------------------------------------|-------------------------------------------------------------|-----------------------------------------------------------------------|--|
| ACTION<br>LEVEL                | ET                                            | IEC                                                  | ER                                                          | CONTRACTOR                                                            |  |
| Design Check                   | Check final design conforms to                | <ol> <li>Check report.</li> <li>Recommend</li> </ol> | Undertake remedial design if necessary                      |                                                                       |  |
|                                | the requirements of EP and prepare            | remedial design if necessary                         |                                                             |                                                                       |  |
| Non-conformity on one occasion | report.  1. Identify Source 2. Inform IEC and | Check report     Check Contractor's                  | Notify Contractor     Ensure remedial measures are properly | Amend working methods     Rectify damage and                          |  |
|                                | ER 3. Discuss remedial                        | working method  3. Discuss with ET and               | implemented                                                 | undertake any necessary replacement                                   |  |
|                                | actions with IEC,                             | Contractor on possible remedial measures             |                                                             | теріасеттеті                                                          |  |
|                                | 4. Monitor remedial actions until             | Advise ER on     effectiveness of                    |                                                             |                                                                       |  |
|                                | rectification has been completed              | proposed remedial measures.                          |                                                             |                                                                       |  |
|                                | Som Sompletou                                 | 5. Check implementation of remedial measures.        |                                                             |                                                                       |  |
| Repeated Non-conformity        | Inform IEC and                                | Check monitoring report                              | Notify Contractor     Ensure remedial measures are properly | <ol> <li>Amend working methods</li> <li>Rectify damage and</li> </ol> |  |

| ER                   | 2. Check Contractor's  | implemented | undertake any necessary |
|----------------------|------------------------|-------------|-------------------------|
| 2. Increase          | working method         |             | replacement             |
| monitoring           | 3. Discuss with ET and |             |                         |
| frequency            | Contractor on possible |             |                         |
| 3. Discuss remedial  | remedial measures      |             |                         |
| actions with IEC,    | 4. Advise ER on        |             |                         |
| ER and Contractor    | effectiveness of       |             |                         |
| 4. Monitor remedial  | proposed remedial      |             |                         |
| actions until        | measures               |             |                         |
| rectification has    | 5. Supervise           |             |                         |
| been completed       | implementation of      |             |                         |
| 5. If non-conformity | remedial measures.     |             |                         |
| stops, cease         |                        |             |                         |
| additional           |                        |             |                         |
| monitoring           |                        |             |                         |

APPENDIX K ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE (EMIS)

# $\label{lem:construction} \begin{tabular}{ll} Appendix $K$ - Summary of Implementation Schedule of Mitigation Measures for Construction Phase \\ \end{tabular}$

| Types of Impacts     | Mitigation Measures                                                                                                                                                                                                                                                     | Status |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| 2112                 | 8 times daily watering of the work site with active dust emitting activities.  Implementation of dust suppression measures stipulated in Air Pollution Control (Construction Dust) Regulation.                                                                          | ٨      |
|                      | The following mitigation measures, good site practices<br>and a comprehensive dust monitoring and audit<br>programme are recommended to minimize cumulative<br>dust impacts.                                                                                            |        |
|                      | <ul> <li>Stockpiling site(s) should be lined with impermeable<br/>sheeting and bunded. Stockpiles should be fully<br/>covered by impermeable sheeting to reduce dust<br/>emission.</li> </ul>                                                                           | ^      |
|                      | <ul> <li>Misting for the dusty material should be carried out<br/>before being loaded into the vehicle</li> </ul>                                                                                                                                                       | ^      |
|                      | <ul> <li>Any vehicle with an open load carrying area should<br/>have properly fitted side and tail boards.</li> <li>Material having the potential to create dust should not</li> </ul>                                                                                  | ^      |
|                      | be loaded from a level higher than the side and tail boards and should be dampened and covered by a clean tarpaulin.                                                                                                                                                    | ٨      |
|                      | <ul> <li>The tarpaulin should be properly secured and should<br/>extent at least 300 mm over the edges of the sides and<br/>tailboards. The material should also be dampened if<br/>necessary before transportation.</li> </ul>                                         | ^      |
| Construction<br>Dust | <ul> <li>The vehicles should be restricted to maximum speed<br/>of 10 km per hour and confined haulage and delivery<br/>vehicle to designated roadways insider the site. On-<br/>site unpayed roads should be compacted and kept free<br/>of lose materials.</li> </ul> | ^      |
|                      | <ul> <li>Vehicle washing facilities should be provided at every<br/>vehicle exit point.</li> </ul>                                                                                                                                                                      | *      |
|                      | <ul> <li>The area where vehicle washing takes place and the<br/>section of the road between the washing facilities and<br/>the exit point should be paved with concrete,<br/>bituminous materials or hardcores.</li> </ul>                                              | ۸      |
|                      | Every main haul road should be scaled with concrete<br>and kept clear of dusty materials or sprayed with water<br>so as to maintain the entire road surface wet.                                                                                                        | ٨      |
|                      | <ul> <li>Every stock of more than 20 bags of cement should be<br/>covered entirely by impervious sheeting placed in an<br/>area sheltered on the top and the three sides.</li> </ul>                                                                                    | ۸      |
|                      | <ul> <li>Every vehicle should be washed to remove any dusty<br/>materials from its body and wheels before leaving the<br/>construction sites.</li> </ul>                                                                                                                | ۸      |
|                      |                                                                                                                                                                                                                                                                         |        |
|                      |                                                                                                                                                                                                                                                                         |        |
|                      |                                                                                                                                                                                                                                                                         |        |

|                       | Use of quiet PME, movable barriers barrier for Asphalt Paver, Breaker, Excavator and Hand-held breaker and full enclosure for Air Compressor, Bar Bender, Concrete Pump, Generator and Water Pump                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | ۸             |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
|                       | <ul> <li>Good Site Practice:</li> <li>Only well-maintained plant should be operated on-site and plant should be serviced regularly during the construction program.</li> <li>Silencers or mutillers on construction equipment should be utilized and should be properly maintained during the construction program.</li> <li>Mobile plant, if any, should be sited as far away from NSRs as possible.</li> <li>Machines and plant (such as trucks) that may be in intermittent use should be shut down between works periods or should be throttled down to a minimum.</li> <li>Plant known to emit noise strongly in one direction should wherever possible be orientated so that the noise is directed away from the nearby NSRs.</li> <li>Material stockpiles and other structures should be effectively utilized, wherever practicable, in screening noise from on-site construction activities.</li> </ul> | N/A(1)  ^ ^ ^ |
| Construction<br>Noise | Scheduling of Construction Works during School Examination Period  (i) Provision of low noise surfacing in a section of Road L2; and                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | ^<br>N/A      |
|                       | (ii) Provision of structural fins     (i) Avoid the sensitive façade of class room facing Road                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | N/A<br>N/A    |
|                       | L2 and L4; and  (ii) Provision of low noise surfacing in a section of Road L2  & L4  (i) Provision of low noise surfacing in a section of Road L4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | N/A           |
|                       | before occupation of Site 1I1; and  (ii) Setback of building about 5m from site boundary.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | N/A<br>N/A    |
|                       | Setback of building about 35m to the northwest direction at 1L3 and 5m at Site 1L2.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | N/A           |
|                       | avoid any sensitive façades with openable window facing the existing Kowloon City Road network; and                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | N/A           |
|                       | (ii) for the sensitive facades facing the To Kwa Wan<br>direction, either setback the facades by about 5m<br>to the northeast direction or do not provide the<br>facades with openable window.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | N/A           |

|                                  | avoid any sensitive facades with openable window facing the existing To Kwa Wan Road or      provision of 17.5m high noise tolerant building fronting To Kwa Wan Road and restrict the height of the residential block(s) located at less than 55m away from To Kwa Wan Road to no more than                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | N/A<br>N/A  |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
|                                  | 25m above ground.     avoid any sensitive facades with openable window facing the slip road connecting Prince Edward Road East and San Po Kong or other alternative mitigation measures and at-source mitigation measures for the surrounding new local roads to minimise the potential traffic noise impacts from the slip road                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | N/A         |
|                                  | All the ventilation fans installed in the below will be                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |
|                                  | provided with silencers or acoustics treatment.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | N/A         |
|                                  | (i) SPS<br>(ii) ESS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | N/A         |
|                                  | (iii) Tunnel Ventilation Shaft                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | N/A         |
|                                  | (iv) EFTS depot                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | N/A         |
|                                  | 05 (38) 50                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |             |
|                                  | Installation of retractable roof or other equivalent measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | N/A         |
| Construction<br>Water<br>Quality | The following mitigation measures are proposed to be incorporated in the design of the SPS at KTD, including:  • Dual power supply or emergency generator should be provided at all the SPSs to secure electrical power supply;  • Standby pumps should be provided at all SPSs to ensure smooth operation of the SPS during maintenance of the duty pumps;  • An alarm should be installed to signal emergency high water level in the wet well at all SPSs; and  • For all unmanned SPSs, a remote monitor system connecting SPSs with the control station through telemetry system should be provided so that swift actions could be taken in case of malfunction of unmanned facilities.  Land-based Construction  Construction Runoff  Exposed soil areas should be minimised to reduce the potential for increased siltation, contamination of runoff, and erosion. Construction runoff related impacts associated with the above ground construction activities | N/A N/A N/A |
|                                  | can be readily controlled through the use of appropriate mitigation measures which include:  use of sediment traps  adequate maintenance of drainage systems to prevent flooding and overflow                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | ^           |

Construction site should be provided with adequately designed perimeter channel and pre-treatment facilities and proper maintenance. The boundaries of critical areas of earthworks should be marked and surrounded by dykes or embankments for flood protection. Temporary ditches should be provided to facilitate runoff discharge into the appropriate watercourses, via a silt retention pond. Permanent drainage channels should incorporate sediment basins or traps and baffles to enhance deposition rates. The design of efficient silt removal facilities should be based on the guidelines in Appendix A1 of ProPECC PN 1/94.

Ideally, construction works should be programmed to minimise surface excavation works during the rainy season (April to September). All exposed earth areas should be completed as soon as possible after earthworks have been completed, or alternatively, within 14 days of the cessation of earthworks where practicable. If excavation of soil cannot be avoided during the rainy season, or at any time of year when rainstorms are likely, exposed slope surfaces should be covered by tarpaulin or other means.

Sediment tanks of sufficient capacity, constructed from pre-formed individual cells of approximately 6 to 8 m³ capacity, are recommended as a general mitigation measure which can be used for settling surface runoff prior to disposal. The system capacity is flexible and able to handle multiple inputs from a variety of sources and particularly suited to applications where the influent is numbed

Open stockpiles of construction materials (for examples, aggregates, sand and fill material) of more than 50 m<sup>3</sup> should be covered with tarpaulin or similar fabric during rainstorms. Measures should be taken to prevent the washing away of construction materials, soil, silt or debris into any drainage system.

Manholes (including newly constructed ones) should always be adequately covered and temporarily sealed so as to prevent silt, construction materials or debris being washed into the drainage system and storm runoff being directed into foul sewers.

Precautions to be taken at any time of year when rainstorms are likely, actions to be taken when a rainstorm is imminent or forecast, and actions to be taken during or after rainstorms are summarised in Appendix A2 of ProPECC PN 1/94. Particular attention should be paid to the control of silty surface runoff during storm events.

Oil interceptors should be provided in the drainage system and regularly cleaned to prevent the release of oils and grease into the storm water drainage system after accidental spillages. The interceptor should have a bypass to prevent flushing during periods of heavy rain.

Λ

All vehicles and plant should be cleaned before leaving a construction site to ensure no earth, mud, debris and the like is deposited by them on roads. An adequately designed and located wheel washing bay should be provided at every site exit, and wash-water should have sand and silt settled out and removed at least on a weekly basis to ensure the continued efficiency of the process. The section of access road leading to, and exiting from, the wheel-wash bay to the public road should be paved with sufficient backfall toward the wheel-wash bay to prevent vehicle tracking of soil and silty water to public roads and drains. Drainage It is recommended that on-site drainage system should be installed prior to the commencement of other construction activities. Sediment traps should be installed in order to minimise the sediment loading of the effluent prior to discharge into foul sewers. There should be no direct discharge of effluent from the site into the sea. All temporary and permanent drainage pipes and culverts ٨ provided to facilitate runoff discharge should be adequately designed for the controlled release of storm flows. All sediment control measures should be regularly inspected and maintained to ensure proper and efficient operation at all times and particularly following rain storms. The temporarily diverted drainage should be reinstated to its original condition when the construction work has finished or the temporary diversion is no longer All fuel tanks and storage areas should be provided with locks and be located on sealed areas, within bunds of a capacity equal to 110% of the storage capacity of the largest tank, to prevent spilled fuel oils from reaching the coastal waters of the Victoria Harbour WCZ. Sewage Effluent Construction work force sewage discharges on site are expected to be connected to the existing trunk sewer or sewage treatment facilities. The construction sewage may need to be handled by portable chemical toilets prior to the commission of the on-site sewer system. Appropriate numbers of portable toilets should be provided by a licensed contractor to serve the large number of construction workers over the construction site. Contractor should also be responsible for waste disposal and maintenance practices. Stormwater Discharges Minimum distances of 100 m should be maintained N/A between the existing or planned stormwater discharges and the existing or planned seawater intakes

| Debris and Litter                                                                                                                                                                                                                                                                                  |   |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| In order to maintain water quality in acceptable conditions with regard to aesthetic quality, contractors should be required, under conditions of contract, to ensure that site management is optimised and that disposal of any solid materials. litter or wastes to marine waters does not occur | ۸ |
| Construction Works at or in Close Proximity of Storm<br>Culvert or Seafront                                                                                                                                                                                                                        |   |
| The proposed works should preferably be carried out within the dry season where the flow in the drainage channel /storm culvert/ nullah is low.                                                                                                                                                    | ۸ |
| The use of less or smaller construction plants may be specified to reduce the disturbance to the bottom sediment at the drainage channel /storm culvert / nullah.                                                                                                                                  | ٨ |
| Temporary storage of materials (e.g. equipment, filling materials, chemicals and fuel) and temporary stockpile of construction materials should be located well away from any water courses during carrying out of the construction works.                                                         | ۸ |
| Stockpiling of construction materials and dusty materials should be covered and located away from any water courses.                                                                                                                                                                               | ۸ |
| Construction debris and spoil should be covered up and/or disposed of as soon as possible to avoid being washed into the nearby water receivers.                                                                                                                                                   | ۸ |
| Construction activities, which generate large amount of wastewater, should be carried out in a distance away from the waterfront, where practicable.                                                                                                                                               | ۸ |
| Mitigation measures to control site runoff from entering the nearby water environment should be implemented to minimize water quality impacts. Surface channels should be provided along the edge of the waterfront within the work sites to intercept the runoff.                                 | ۸ |
| Construction effluent, site run-off and sewage should be properly collected and/or treated.                                                                                                                                                                                                        | ^ |
| Any works site inside the storm water courses should be temporarily isolated, such as by placing of sandbags or silt curtains with lead edge at bottom and properly supported props to prevent adverse impact on the storm water quality.                                                          | ۸ |
| Silt curtain may be installed around the construction activities at the seafront to minimize the potential impacts due to accidental spillage of construction materials.                                                                                                                           | ۸ |
| Proper shoring may need to be erected in order to prevent soil/mud from slipping into the storm culvert/drainage channel/sea.                                                                                                                                                                      | ۸ |
|                                                                                                                                                                                                                                                                                                    |   |

| Marine water quality monitoring and audit programme shall be implemented for the proposed sediment treatment operation.  Good Site Practices  It is not anticipated that adverse waste management related impacts would arise, provided that good site practices are adhered to. Recommendations for good site practices are adhered to. Recommendations for good site practices are adhered to. Recommendations for good site practices, arrangements for collection and effective disposal to an appropriate facility, of all wastes generated at the site  Training of site personnel in proper waste management and chemical waste handling procedures  Provision of sufficient waste disposal points and regular collection for disposal  Appropriate measures to minimise windblown litter and dust during transportation of waste by either covering trucks or by transporting wastes in enclosed containers  A recording system for the amount of wastes, generated, recycled and disposed of (including the disposal sites)  Waste Reduction Measures  Good management and control dan prevent the generation of a significant amount of waste. Waste, reduction is best achieved at the planning and design stage as well as by ensuring the implementation of good site practices. Recommendations to achieve waste reduction include:  Sort CaD waste from demolition of the remaining structures to recover recycling of materials and their proper disposal  Encourage collection of aluminium cans, PET bottles and paper by providing separate labelled bins to anable these wastes to be segregated from other general reluse generated by the work force  Any unused chemicals on those with remaining functional capacity should be recycled.  Proper alorage and site practices to minimise the potential for damage or contamination of construction materials. | ciosei                                 | y supervise and monitor the works                                                                                                                                                                                                                      |   |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| Il is not anticipated that adverse waste management related impacts would arise, provided that good site practices are adhered to. Recommendations for good site practices during construction activities include.  Nomination of an approved person, such as a site manager, to be responsible for good site practices, arrangements for collection and effective disposal to an appropriate facility of all wastes generated at the site.  Training of site personnel in proper waste management and chemical waste handling, procedures.  Provision of sufficient waste disposal points and regular collection for disposal.  Appropriate measures to minimise windblown litter and dust during transportation of waste by either covering trucks or by transporting wastes in enclosed containers.  A recording system for the amount of wastes generated, recycled and disposed of (including the disposal sites).  Waste Reduction Measures.  Good management and control can prevent the generation is best achieved at the planning and design stage as well as by ensuring the implementation of good site practices. Recommendations to achieve waste reduction include:  Sort C&D waste from demolition of the remaining structures to recover recyclable portions such as metals.  Segregation and stronge of different types of waste in different containers, skips or stockplies to enhance reuse or recycling of materials and their proper disposal.  Encourage collection of aluminium cans, PET bottles and paper by provicting separate labelled bins to enable these wastes to be segregated from other general reluse generated by the work force.  Any unused chemicals of those with remaining functional capacity should be recycled.  Proper storage and site practices to minimise the potential for damage or contamination of                           | shall                                  | be implemented for the proposed sediment                                                                                                                                                                                                               | ^ |
| arrangements for collection and effective disposal to an appropriate facility of all wastes generated at the site  Training of site petsonnal in proper waste management and chemical waste handling procedures  Provision of sufficient waste disposal points and regular collection for disposal  Appropriate measures to midmise windblown litter and dust during transportation of waste by either covering trucks or by transporting wastes in enclosed conteniers  A recording system for the amount of wastes generated, recycled and disposed of (including the disposal sites)  Waste Reduction Measures Good management and control can prevent the generation of a significant amount of waste. Waste reduction is best achieved at the planning and design stage as well as by ensuring the implementation of good site practices. Recommendations to achieve waste reduction include:  Sort CaD waste from demolition of the remaining attructures to recover recyclable portions such as mellals  Segregation and snorage of different types of waste in different containers, skips or stockpiles to enhance reuse or recycling of materials and their proper disposal  Encourage collection of aluminum cans, PET bottles and paper by providing separate labelled bins to enable these wastes to be segregated from other general retuse generated by the work force  Any unused chemicals or those with remaining functional capacity should be recycled.                                                                                                                                                                                                                                                                                                                                                                                                          | II is<br>relate<br>pract               | not anticipated that adverse waste management<br>ed impacts would arise, provided that good site<br>ces are adhered to. Recommendations for good site<br>ces during construction activities include.  Nomination of an approved person, such as a site | ^ |
| management and chemical waste handling procedures  Provision of sufficient waste disposal points and regular collection for disposal  Appropriate measures to minimise windblown litter and dust during transportation of waste by either covering trucks or by transporting wastes in enclosed containers  A recording system for the amount of wastes generated, recycled and disposed of (including the disposal sitas).  Waste Reduction Measures Good management and control can prevent the generation of a significant amount of waste. Waste, reduction is best achieved at the planning and design stage as well as by ensuring the implementation of good site practices. Recommendations to achieve waste reduction include:  Sort C&D waste from demolition of the remaining structures to recover recyclable portions such as metals  Segregation and arorage of different types of waste in different containers, skips or stockpiles to enhance reuse of recycling of materials and their proper disposal  Encourage collection of aluminium cans, PET bottles and paper by provicing separate labelled bins to enable these wastes to be segregated from other general refuse generated by the work force  Any unused chemicals or those with remaining functional capacity should the recycled.  Proper storage and site practices to minimise the potential for damage or contamination of                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | - 0                                    | arrangements for collection and effective disposal to an appropriate facility of all wastes generated at                                                                                                                                               |   |
| regular collection for disposal  Appropriate measures to minimise windblown litter and dust during transportation of waste by either covering trucks or by transporting wastes in enclosed containers  A recording system for the amount of wastes generated, recycled and disposed of (including the disposal sites)  Waste Reduction Measures Good management and control can prevent the generation of a significant amount of waste. Waste reduction is best achieved at the planning and design stage as well as by ensuring the implementation of good site practices. Recommendations to achieve waste reduction include:  Sort C&D waste from demolition of the remaining structures to recover recyclable portions such as metals.  Segregation and arrange of different types of waste in different containers, skips or stockpiles to enhance reuse or recycling of materials and their proper disposal  Encourage collection of aluminium cans, PET bottles and paper by providing separate labelled bins to enable these wastes to be segregated from other general reluse generated by the work force  Any unused chemicals of those with remaining functional depacity should be recycled  Proper storage and site practices to minimise the potential for damage or contamination of                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | *                                      | management and chemical waste handling<br>procedures                                                                                                                                                                                                   |   |
| A recording system for the amount of wastes generated, recycled and disposed of (including the disposal sres).  Waste Reduction Measures Good management and control can prevent the generation of a significant amount of waste. Waste reduction is best achieved at the planning and design stage as well as by ensuring the implementation of good after practices. Becommendations to achieve waste reduction include:  Sort CaD waste from demolition of the remaining structures to recover recyclable portions such as metals  Segregation and storage of different types of waste in different containers, skips or stockpiles to enhance reuse or recycling of materials and their proper disposal  Encourage collection of aluminium cans, PET bottles and paper by providing separate labelled bins to enable these wastes to be segregated from other general refuse generated by the work force  Any unused chemicals or those with remaining functional capacity should for recycled  Proper storage and site practices to minimise the potential for damage or contamination of                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | å                                      | regular collection for disposal  Appropriate measures to minimise windblown litter and dust during transportation of waste by either                                                                                                                   |   |
| Waste Reduction Measures Good management and control can prevent the generation of a significant amount of waste. Waste reduction is best achieved at the planning and design stage as well as by ensuring the implementation of good site practices. Recommendations to achieve waste reduction include  Sort CaD waste from demolition of the remaining structures to recover recyclable portions such as metals  Segregation and storage of different types of waste in different containers, skips or stockpiles to enhance reuse or recycling of materials and their proper disposal  Encourage collection of aluminium cans, PET bottles and paper by providing separate labelled bins to enable these wastes to be segregated from other general refuse generated by the work force Any unused chemicals or those with remaining functional capacity should be recycled Proper storage and site practices to minimise the potential for damage or contamination of                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                        | enclosed containers  A recording system for the amount of wastes generated, recycled and disposed of (including the                                                                                                                                    | ^ |
| Sort C&D waste from demolition of the remaining structures to recover recyclable portions such as metals  Segregation and storage of different types of waste in different containers, skips or stockpiles to enhance reuse of recycling of materials and their proper disposal  Encourage collection of aluminium cans, PET bottles and paper by providing separate labelled bins to enable these wastes to be segregated from other general reluse generated by the work force  Any unused chemicals of those with remaining functional capacity should be recycled  Proper storage and site practices to minimise the potential for damage or contamination of                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Good<br>gene<br>reduc<br>stage<br>site | management and control can prevent the ration of a significant amount of waste. Waste than is best achieved at the planning and design as well as by ensuring the implementation of good practices. Recommendations to achieve waste                   |   |
| waste in different containers, skips or stockpiles to enhance reuse of recycling of materials and their proper disposal  Encourage collection of aluminium cans, PET bottles and paper by providing separate labelled hins to enable these wastes to be segregated from other general reluse generated by the work force  Any unused chemicals or those with remaining functional capacity should be recycled  Proper storage and site practices to minimise the potential for damage or contamination of                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 1000000                                | Sort C&D waste from demolition of the remaining<br>structures to recover recyclable portions such as                                                                                                                                                   | ٨ |
| bottles and paper by providing separate labelled bins to enable these wastes to be segregated from other general refuse generated by the work force  Any unused chemicals of those with remaining functional capacity should be recycled  Proper storage and site practices to minimise the potential for damage or contamination of                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | •                                      | waste in different containers, skips or stockpiles to<br>enhance reuse of recycling of materials and their<br>proper disposal                                                                                                                          | ٨ |
| <ul> <li>Froper storage and site practices to minimise the potential for damage or contamination of</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                        | bottles and paper by providing separate labelled<br>bins to enable these wastes to be segregated from                                                                                                                                                  | ٨ |
| potential for damage or contamination of                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | *                                      | functional capacity should be recycled                                                                                                                                                                                                                 |   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                        | potential for damage or contamination of                                                                                                                                                                                                               |   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                        |                                                                                                                                                                                                                                                        |   |

### Construction and Demoirtion Material

Miligation measures and good site practices should be incorporated into contract document to control potential environmental impact from handling and transportation of C&O material. The mitigation measures include.

- Where it is unavoidable to have transient stockpiles of C&D material within the Project work.
   site pending collection for disposal, the transient slockpiles should be located away from waterfront or storm drains as far as possible.
- Open stockpiles of construction materials or construction wastes an site should be covered with terpaulin or similar fabric

٨

Λ

٨

- Skip hoist for material transport should be totally enclosed by impervious sheeting
- Every vehicle should be washed to remove any dusty materials from its body and wheels before leaving a construction site
- The area where vehicle washing takes place and the section of the mad between the washing facilities and the exit point should be paved with concrete bituminous materials or hardcores
- The load of dusty materials carried by vehicle leaving a construction site should be covered emirely by clean impervious sheeting to ensure dust materials do not leak from the vehicle
- All dusty materials should be aprayed with water prior to any loading, unloading or !rarisfer operation so as to maintain the dusty materials wet
- The height from which excavated materials are dropped should be controlled to a minimum practical height to limit fugitive dust generation from unloading

When delivering inert C&D material to public fill reception facilities, the material should consist entirely of ment construction waste and of size less than 250mm or other sizes as agreed with the Secretary of the Public Fill Committee. In order to monitor the disposal or the surplus C&D material at the designed public fill reception facility and to control fly tipping, a Inputoket system as stipulated in the ETWE TCW No. 31/2004 "Trip Ticket System for Disposal of Construction and Demolition Minterials" should be included as one of the contractual requirements and implemented by an Environmental Team unpenaling the Environmental Monitoring and Audit work. An Independent Environmental Checket should be responsible for auditing the results of the system.

#### Chemical Waste

After use, chemical wastes (for example, cleaning fluids, solvents, lubrication oil and fuel) should be handled according to the Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes. Spent chemicals should be collected by a licensed collector for disposal at the CWTF or other licensed facility, in accordance with the Waste Disposal (Chemical Waste) (General) Regulation

|                         | General Refuse                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |     |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|
|                         | General refuse should be stored in enclosed bins or compaction units separate from C&D material. A licensed waste collector should be employed by the contractor to remove general refuse from the site, separately from C&D material. Effective collection and storage methods (including enclosed and covered area) of site wastes would be required to prevent waste materials from being blown around by wind, wastewater discharge by flushing or leaching into the marine environment, or creating odour nuisance or pest and vermin problem | ^   |
|                         | CM1 All existing trees should be carefully protected<br>during construction.                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | ^   |
| Landscape<br>and Visual | CM2 Trees unavoidably affected by the works should be transplanted where practical. Detailed transplanting proposal will be submitted to relevant government departments for approval in accordance with ETWBC 2/2004 and 3/2006. Final locations of transplanted trees should be agreed prior to commencement of the work.                                                                                                                                                                                                                        | N/A |
|                         | CM3 Control of night-time lighting.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | ٨   |
|                         | CM4 Erection of decorative screen hoarding.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | ۸   |

| Remarks: | ^ Compliance of mitigation measure;                                                   |
|----------|---------------------------------------------------------------------------------------|
|          | X Non-compliance of mitigation measure;                                               |
|          | N/A Not Applicable at this stage;                                                     |
|          | N/A(1) Not observed;                                                                  |
|          | Non-compliance but rectified by the contractor;                                       |
|          | * Recommendation was made during site audit but improved/rectified by the contractor. |

APPENDIX L
SUMMARIES OF ENVIRONMENTAL
COMPLAINT, WARNING, SUMMON
AND NOTIFICATION OF SUCCESSFUL
PROSECUTION

### Contract No. KL/2012/03

## Kai Tak Development –Stage 4 Infrastructure at Former North Apron Area

### Appendix L – Summary of environmental complaint, warning, summon and notification of successful prosecution

**Reporting Month**: January 2017

Warnings / Summons and Successful Prosecutions received in the reporting month

| Log Ref. | Received<br>Date | Details of Warning / Summons and<br>Successful Prosecutions | Investigation/Mitigation Action | Status |
|----------|------------------|-------------------------------------------------------------|---------------------------------|--------|
| N/A      | N/A              | N/A                                                         | N/A                             | N/A    |

Remarks: No warning/summon and prosecution were received in the reporting period.

**Complaint Log** 

| EPD<br>Complaint<br>Ref No. | Date of<br>Complaint | Complaint Details                                                                                                                                                                                                    | Investigation /<br>Mitigation Action                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Status |
|-----------------------------|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| 15-14258                    | 10/6/2015            | Complainant said dust emission from the construction work affecting him/her. The stockpiles was not covered properly such that dust emission was observed. Some muddy water was found in To Kwa Wan Typhoon Shelter. | Complaint cases referred to the Contractor. Investigation conducted by the Contract ET. The investigation results showed that no major construction activities were conducted at the time of complaint on the day - 10 <sup>th</sup> June 2015. Since no marine works or land-based construction activities near the To Kwa Wan Typhoon Shelter were conducted, muddy effluent discharged to the To Kwa Wan Typhoon Shelter is not anticipated.  The regular impact air monitoring results in the first three weeks of June 2015 were in full compliance with the Action and Limit levels. No major environmental deficiencies were observed related to the air quality and water quality, and the deficiencies as mentioned in the complaint were not recorded during the site inspections. | Closed |

### APPENDIX M GENERATED WASTE QUANTITY

### APPENDIX IV

## **Monthly Summary Waste Flow Table**


(PS Clause 1.86)

Name of Department: CEDD Contract No.: KL/2012/03

## Monthly Summary Waste Flow Table for January 2017 (year) (in tons)

|                            |                            |                             |           | •                      |           | ials Generated N        | Actual Quantities of C&D Wastes Generated Monthly |           |                                  |                          |                    |                                   |  |
|----------------------------|----------------------------|-----------------------------|-----------|------------------------|-----------|-------------------------|---------------------------------------------------|-----------|----------------------------------|--------------------------|--------------------|-----------------------------------|--|
| Month                      | Total<br>Disposal<br>Loads | Total Quantity<br>Generated |           | Reused in the Contract |           | Disposed as Public Fill | Imported Fill                                     |           | Paper/<br>cardboard<br>packaging | Plastics (see<br>Note 3) | Chemicals<br>Waste | Others, e.g.<br>general<br>refuse |  |
|                            | (No.s)                     | (in tons)                   | (in tons) | (in tons)              | (in tons) | (in tons)               | (in tons)                                         | (in tons) | (in tons)                        | (in tons)                | (in tons)          | (in tons)                         |  |
| 2013 (Oct - Dec) Sub-Total | 108                        | 463.69                      | 0         | 0                      | 0         | 0                       | 0                                                 | 0         | 0                                | 0                        | 0                  | 463.69                            |  |
| 2014 (Jan – Dec) Sub-Total | 24                         | 16925.7                     | 0         | 0                      | 16798.93  | 83.66                   | 1804.27                                           | 0         | 0                                | 0                        | 0                  | 43.11                             |  |
| 2015 (Jan – Dec) Sub-Total | 284                        | 81859.97                    | 0         | 0                      |           | 43457.21                | 19920                                             | 0         | 0                                | 0                        | 0                  | 310.26                            |  |
| 2015 (Jan – Dec) Sub-Total | 3369                       | 50762.64                    | 0         | 0                      |           | 49894.67                | 4020                                              | 0         | 0                                | 0                        | 0                  | 867.95                            |  |
| Jan-17                     | 23                         | 107.63                      | 0         | 0                      |           | 58.53                   | 0                                                 | 0         | 0                                | 0                        | 0                  | 39.1                              |  |
| Feb-17                     |                            |                             |           |                        |           |                         |                                                   |           |                                  |                          |                    |                                   |  |
| Mar-17                     |                            |                             |           |                        |           |                         |                                                   |           |                                  |                          |                    |                                   |  |
| Apr-17                     |                            |                             |           |                        |           |                         |                                                   |           |                                  |                          |                    |                                   |  |
| May-17                     |                            |                             |           |                        |           |                         |                                                   |           |                                  |                          |                    |                                   |  |
| Jun-17                     |                            |                             |           |                        |           |                         |                                                   |           |                                  |                          |                    |                                   |  |
| Jul-17                     |                            |                             |           |                        |           |                         |                                                   |           |                                  |                          |                    |                                   |  |
| Aug-17                     |                            |                             |           |                        |           |                         |                                                   |           |                                  |                          |                    |                                   |  |
| Sep-17                     |                            |                             |           |                        |           |                         |                                                   |           |                                  |                          |                    |                                   |  |
| Oct-17                     |                            |                             |           |                        |           |                         |                                                   |           |                                  |                          |                    |                                   |  |
| Nov-17                     |                            |                             |           |                        |           |                         |                                                   |           |                                  |                          |                    |                                   |  |
| Dec-17                     |                            |                             |           |                        |           |                         |                                                   |           |                                  |                          |                    |                                   |  |
| Total                      | 3808                       | 150119.63                   | 0         | 0                      | 55090.84  | 93494.07                | 25744.27                                          | 0         | 0                                | 0                        | 0                  | 1724.11                           |  |

# APPENDIX N CONSTRUCTION PROGRAMME

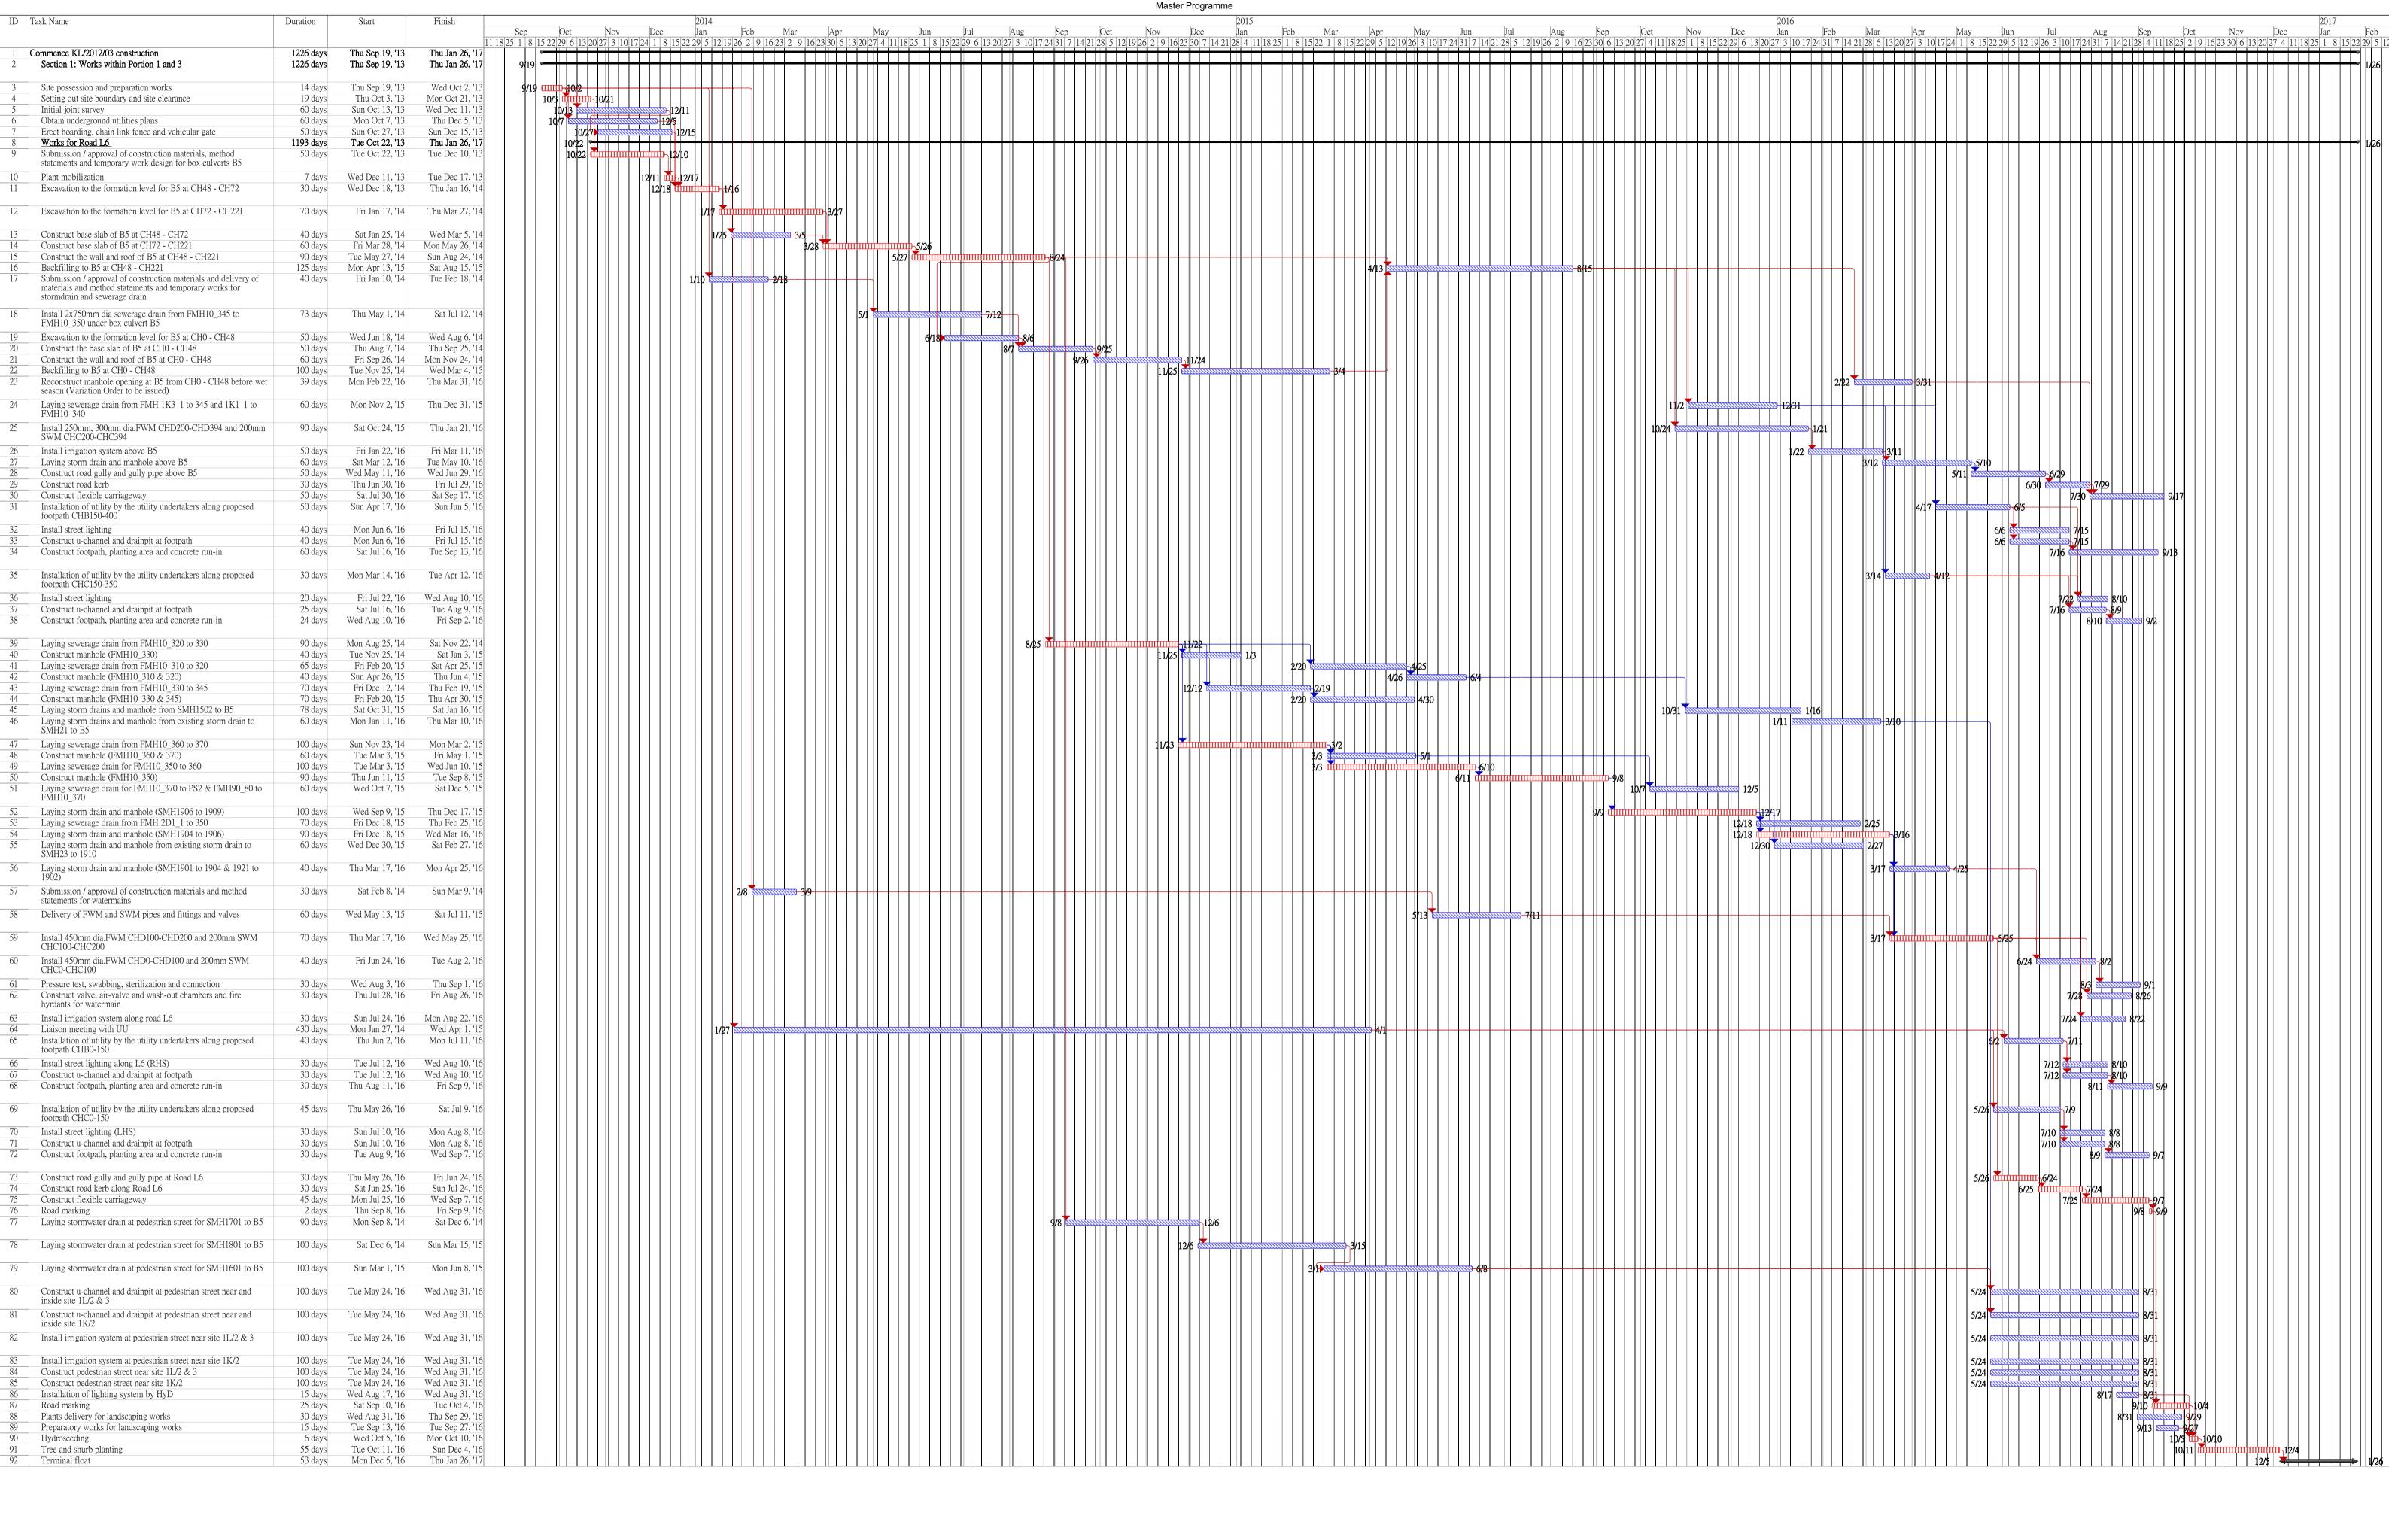

Critical tasks

Non-critical Tasks

Working days

Inactive Milestone

Inactive Summary

Manual Task

Duration-only

Manual Summary Rollup ◆


Manual Summary

Start-only

Finish-only


External Tasks

External Milestone

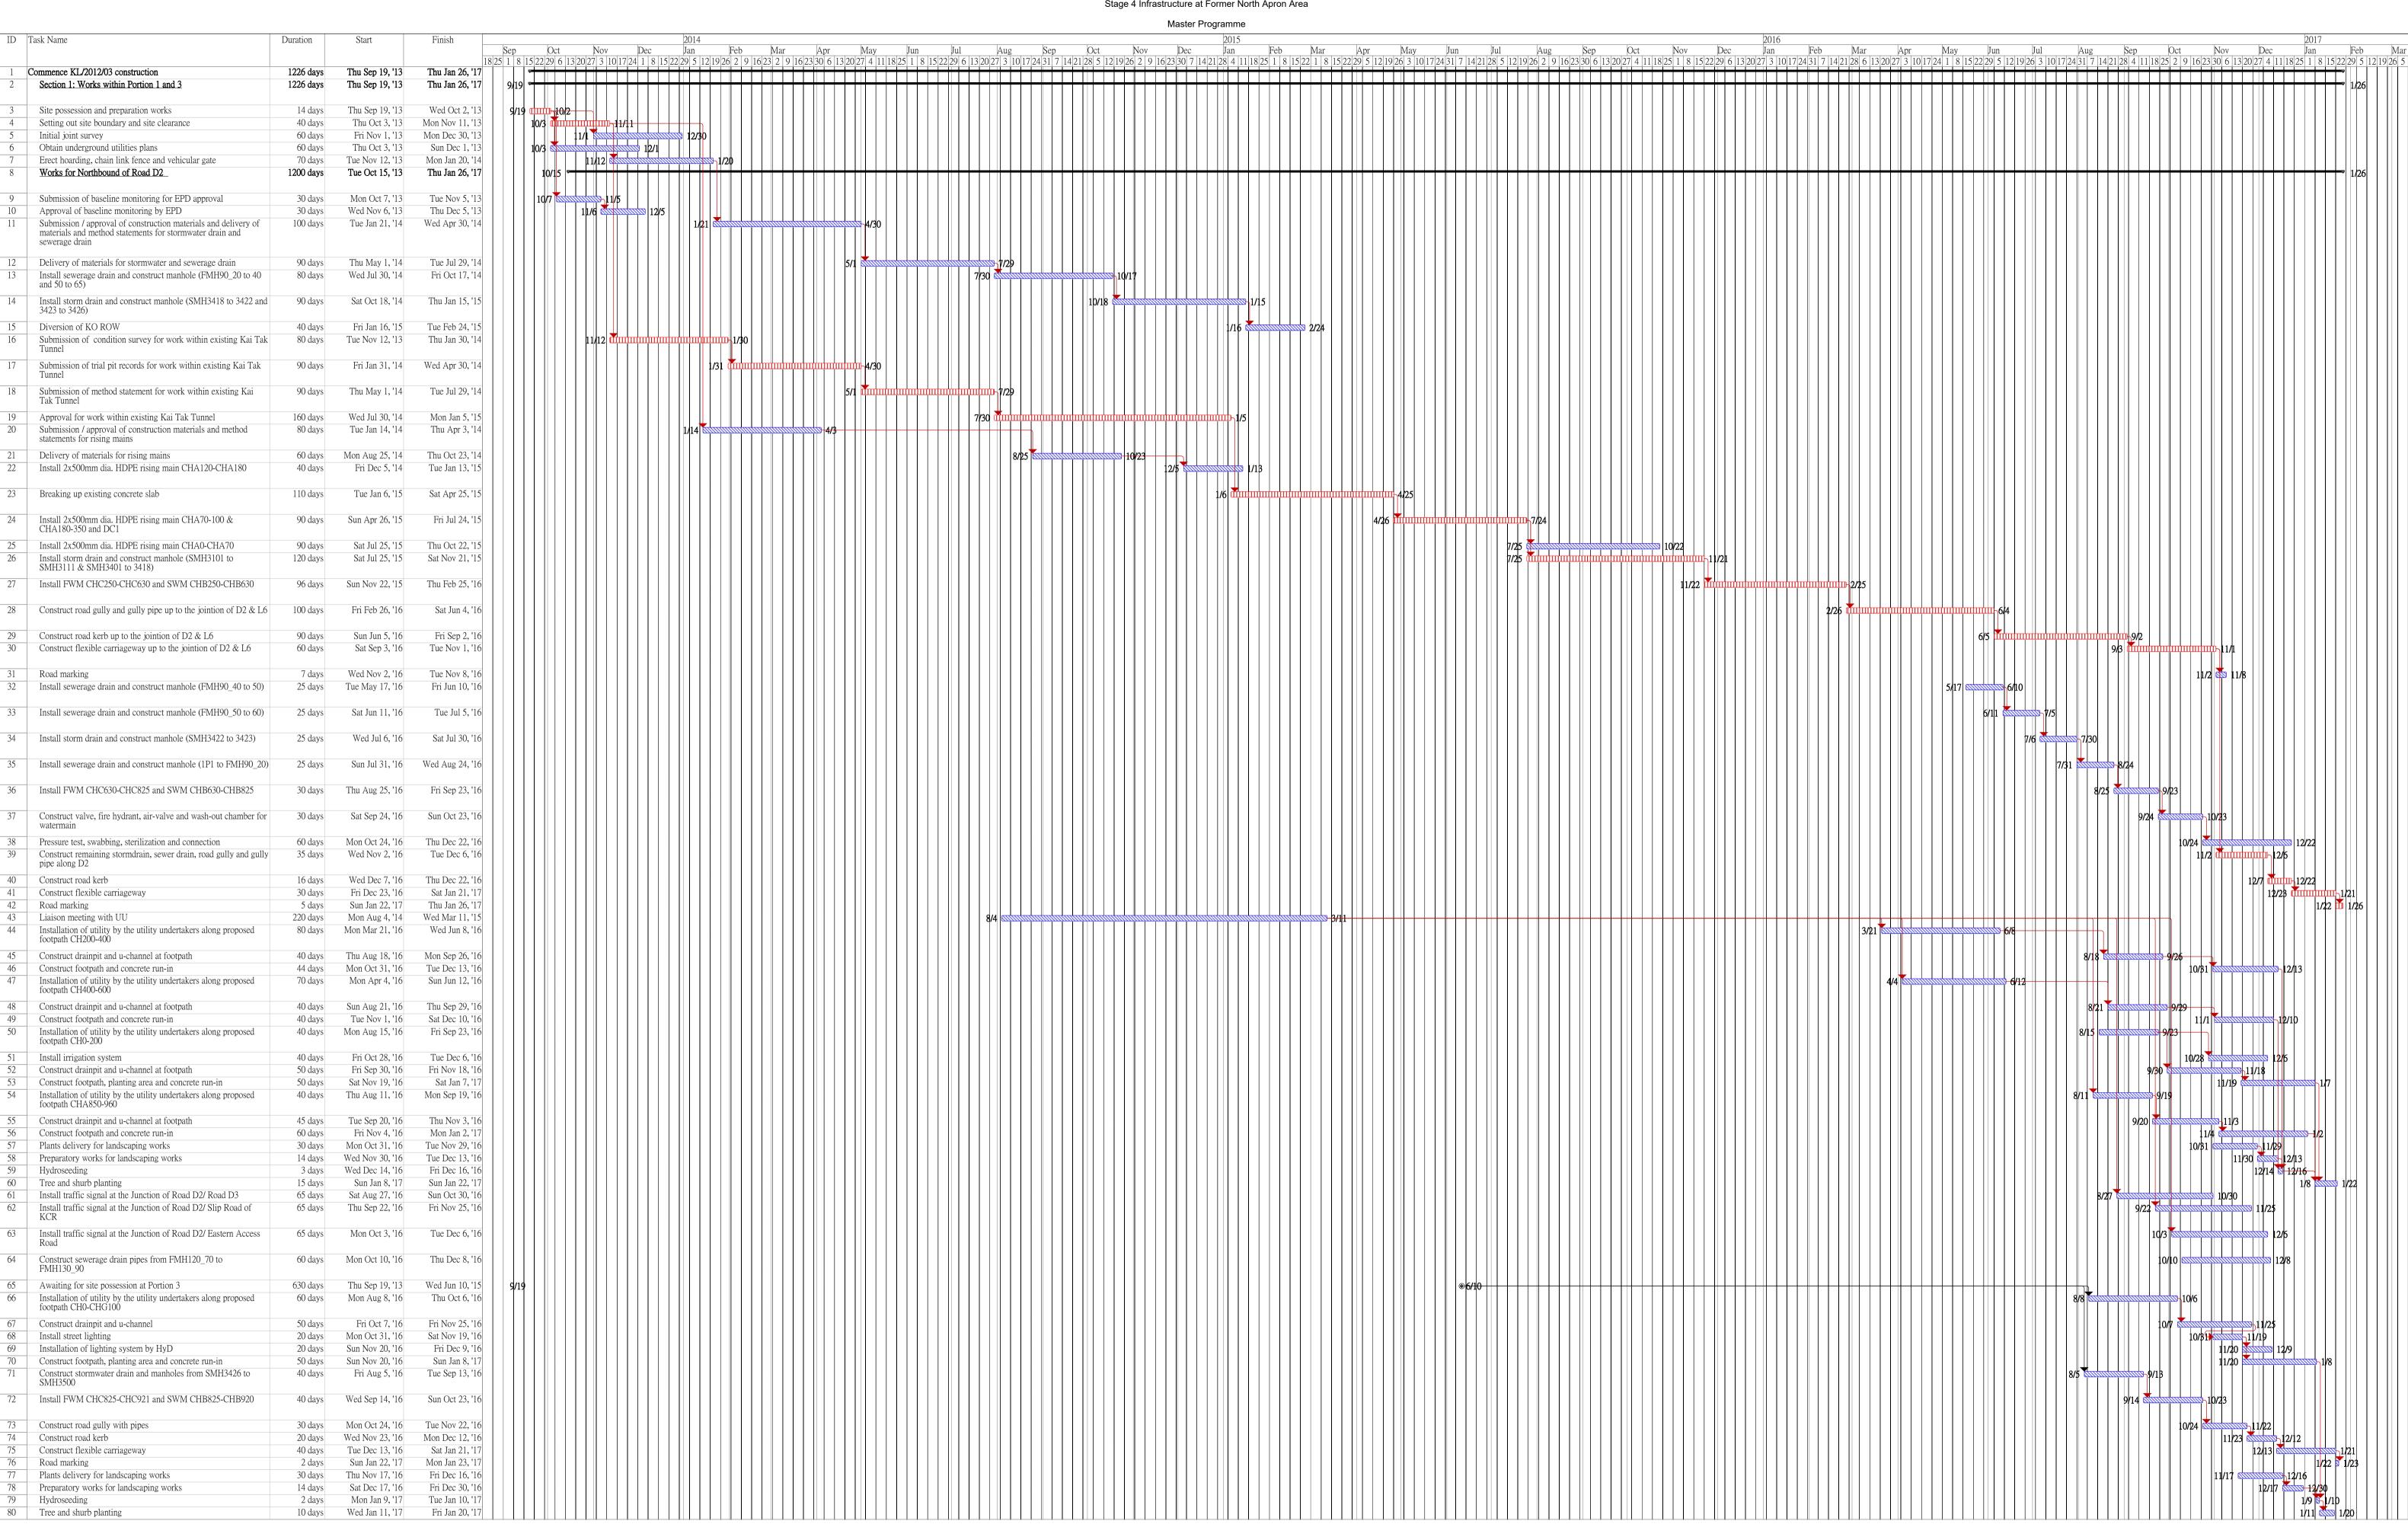

Critical tasks | Unactive Summary | Unactive Summary | Unactive Summary | Unactive Summary | Unactive Milestone |

Completion Date: 2 September 2016 Revised Completion Date: 26 January 2017

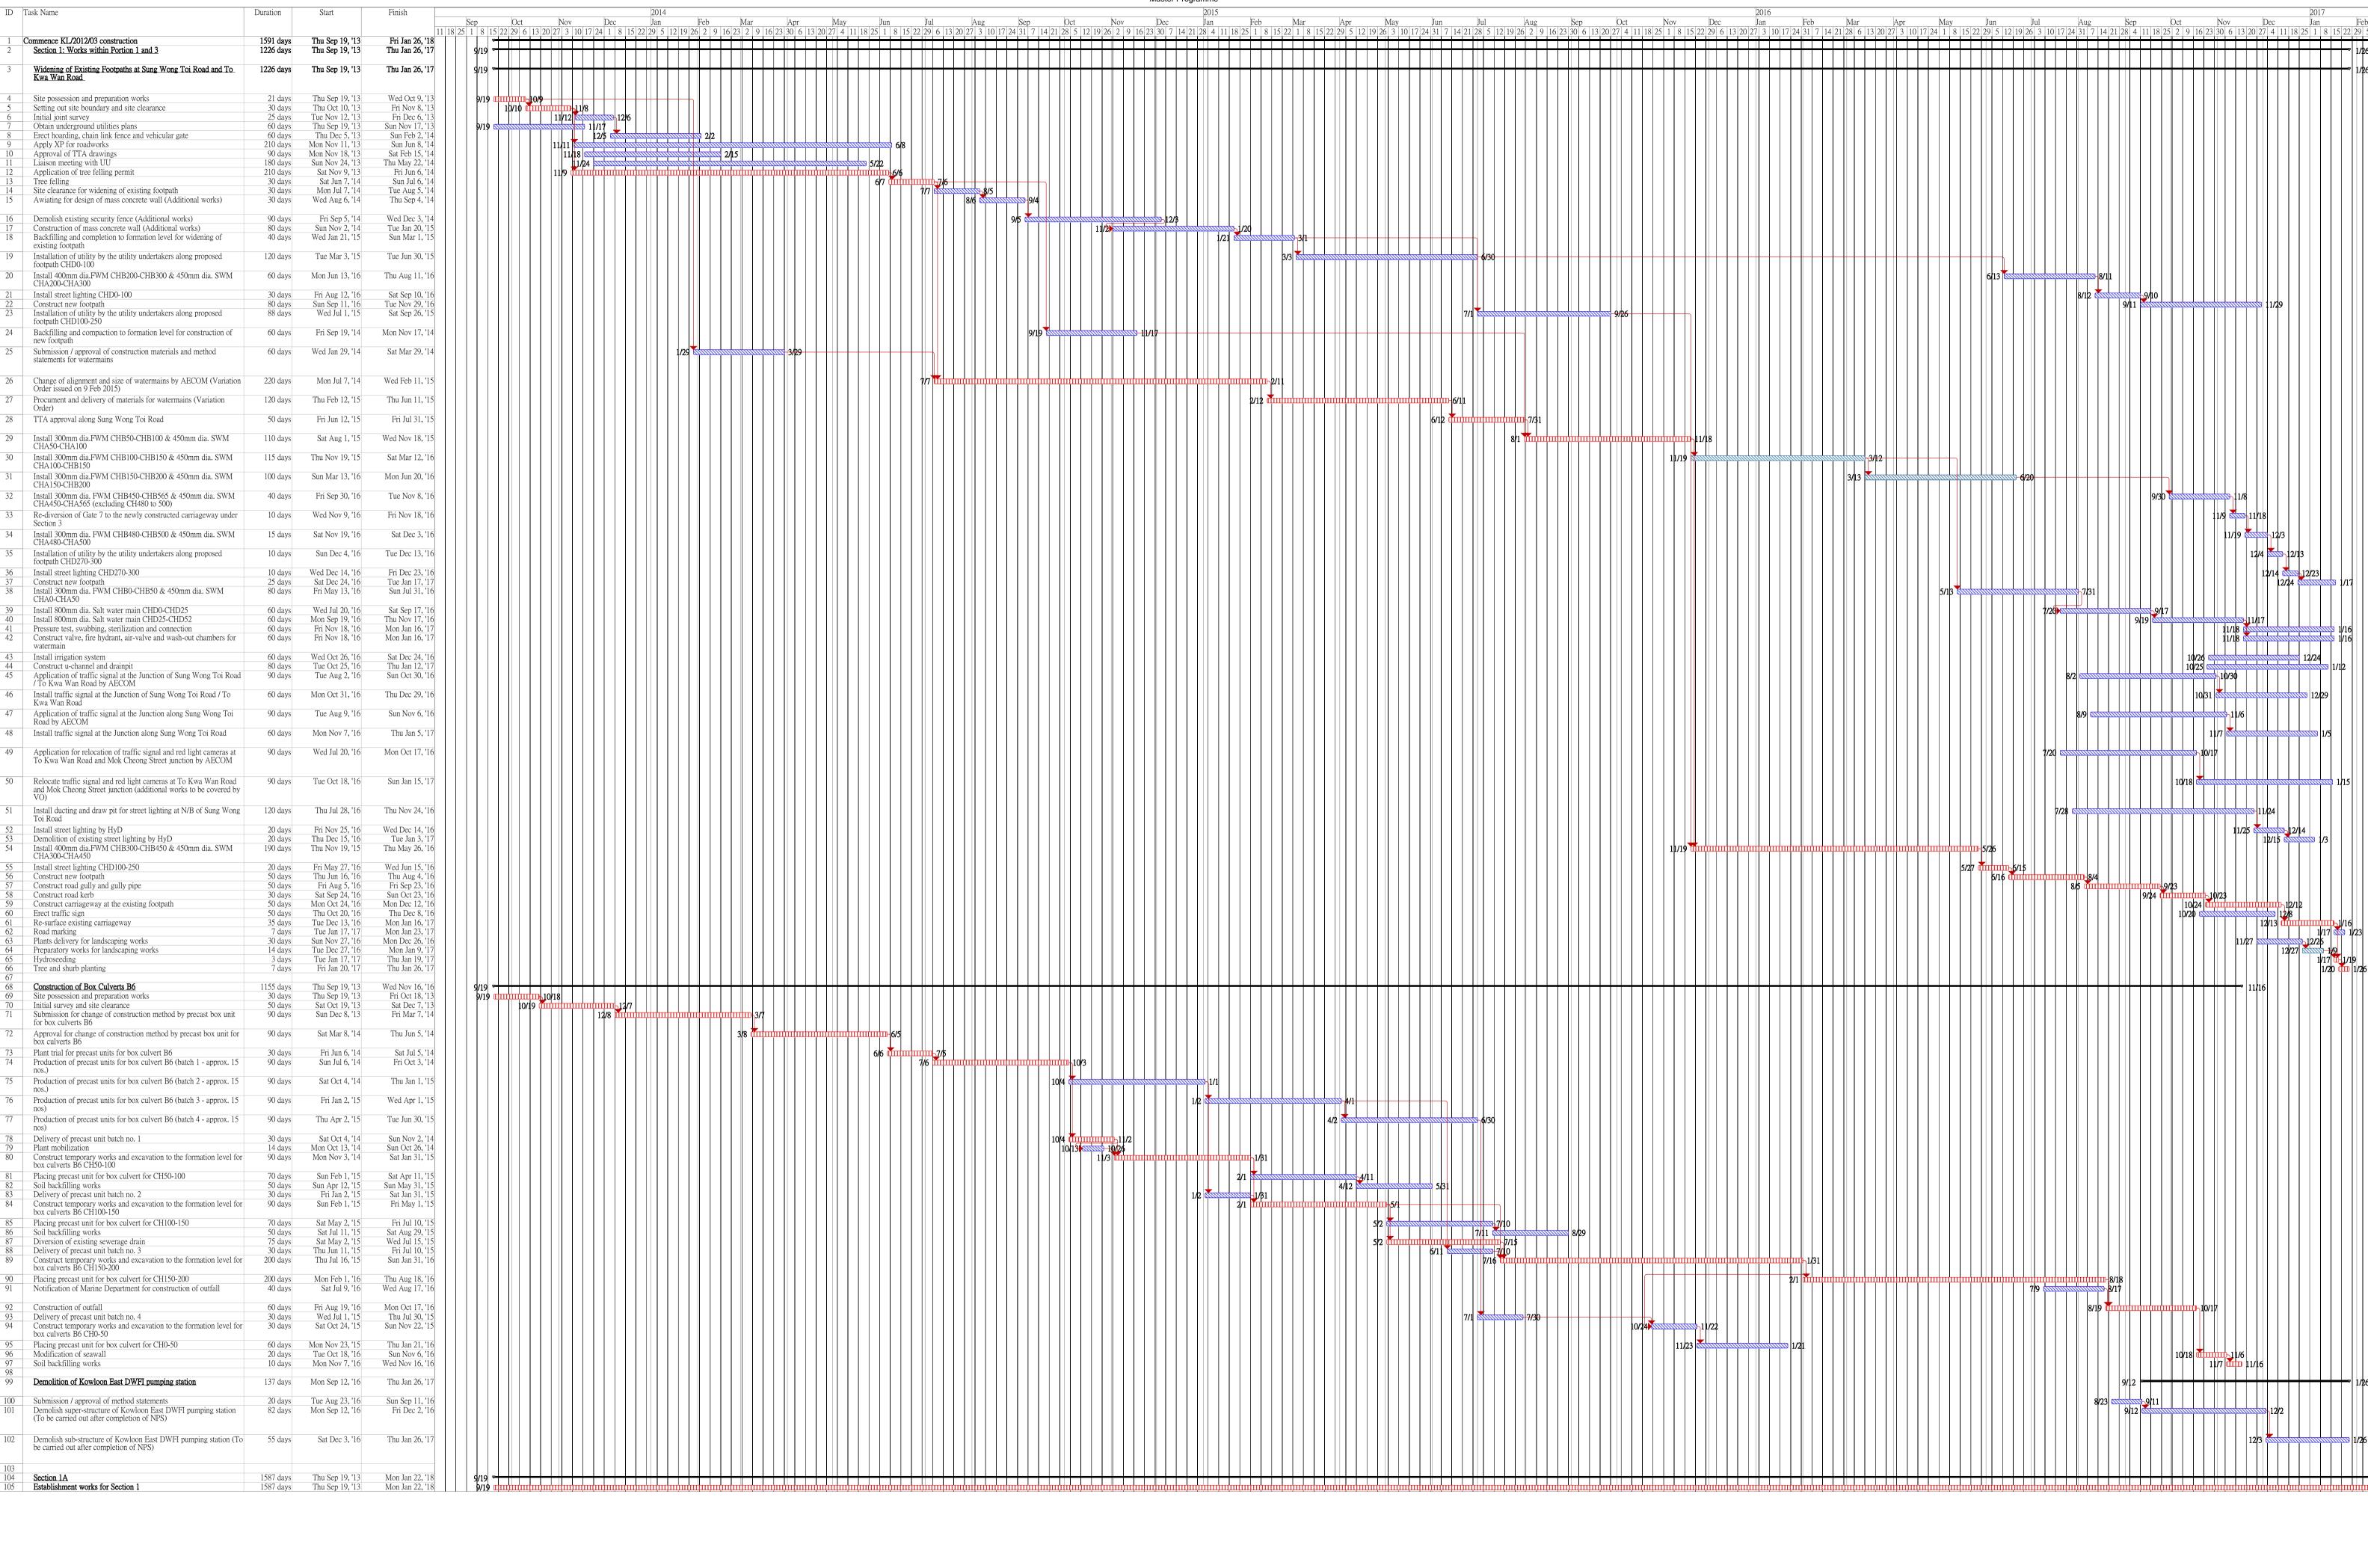


Commencement Date: 19 September 2013
Completion Date: 2 September 2016
Revised Completion Date: 46 January 2017

Critical tasks

Critical tasks

Manual Summary Non-critical tasks

Updated on 29 July 2016

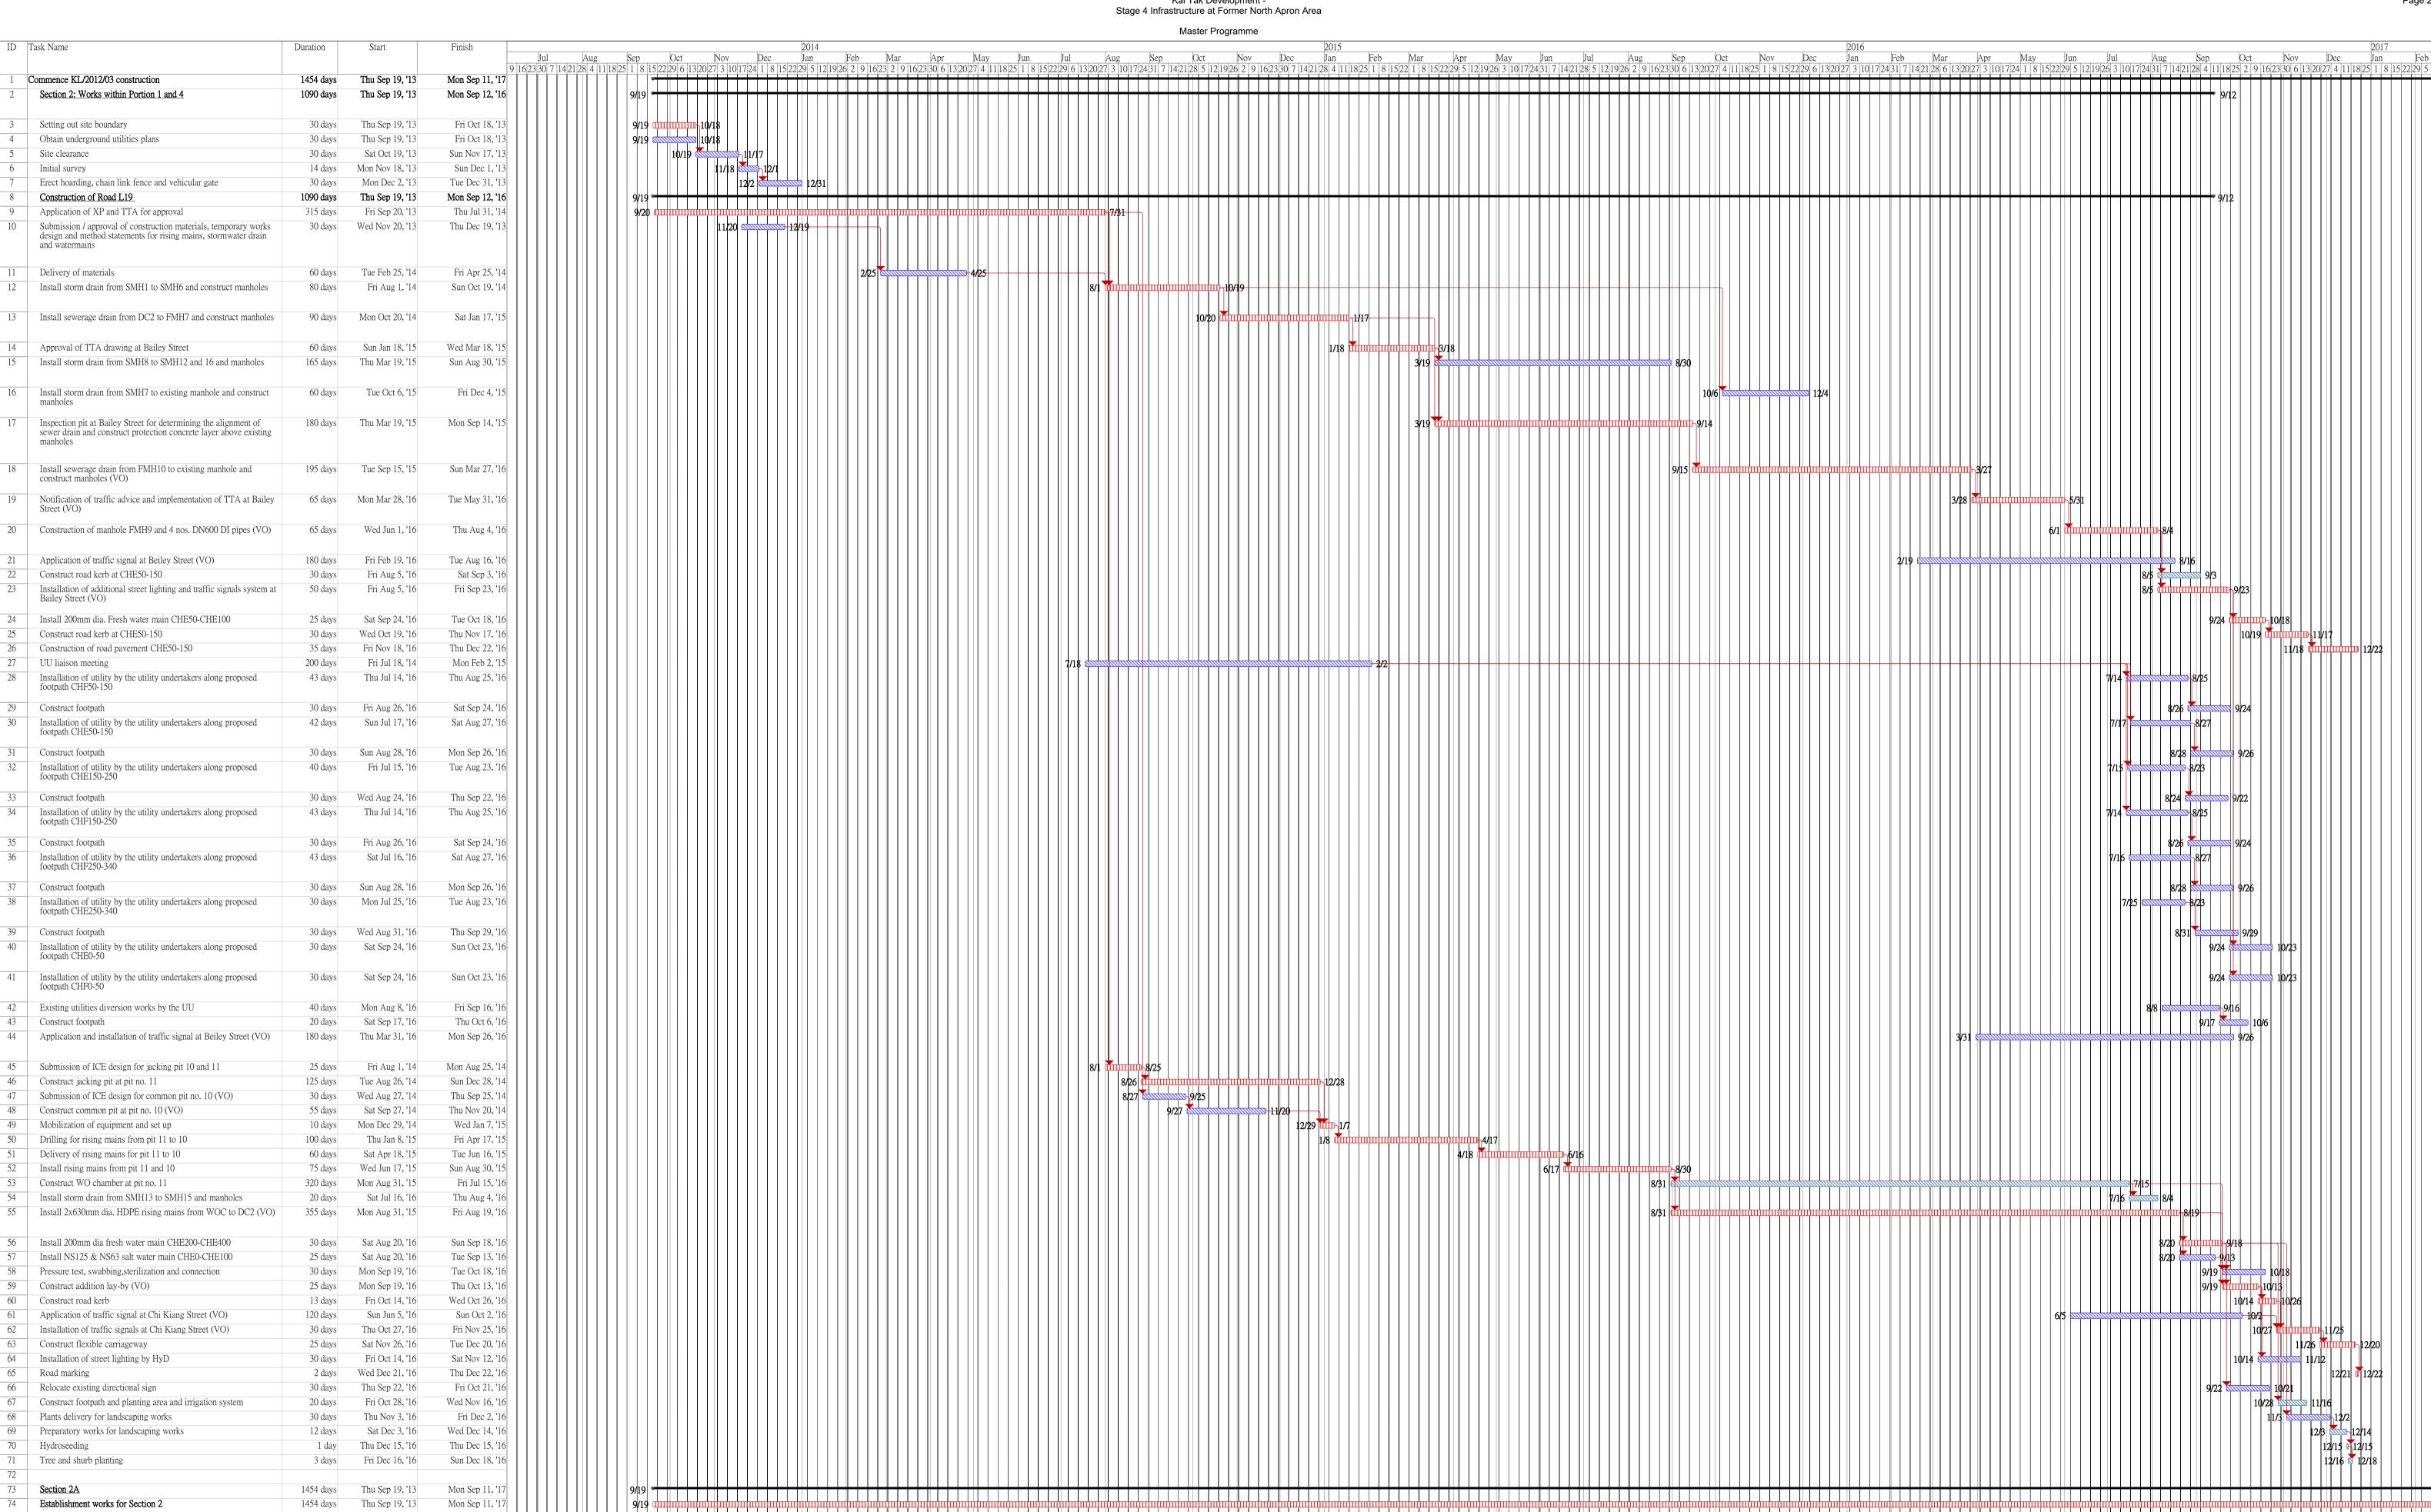

Critical tasks

Non-critical tasks

Working days

Inactive Milestone

Inactive Summary

Manual Task

Duration-only

Manual Summary Rollup


Manual Summary

Start-only


Finish-only

External Tasks

External Milestone

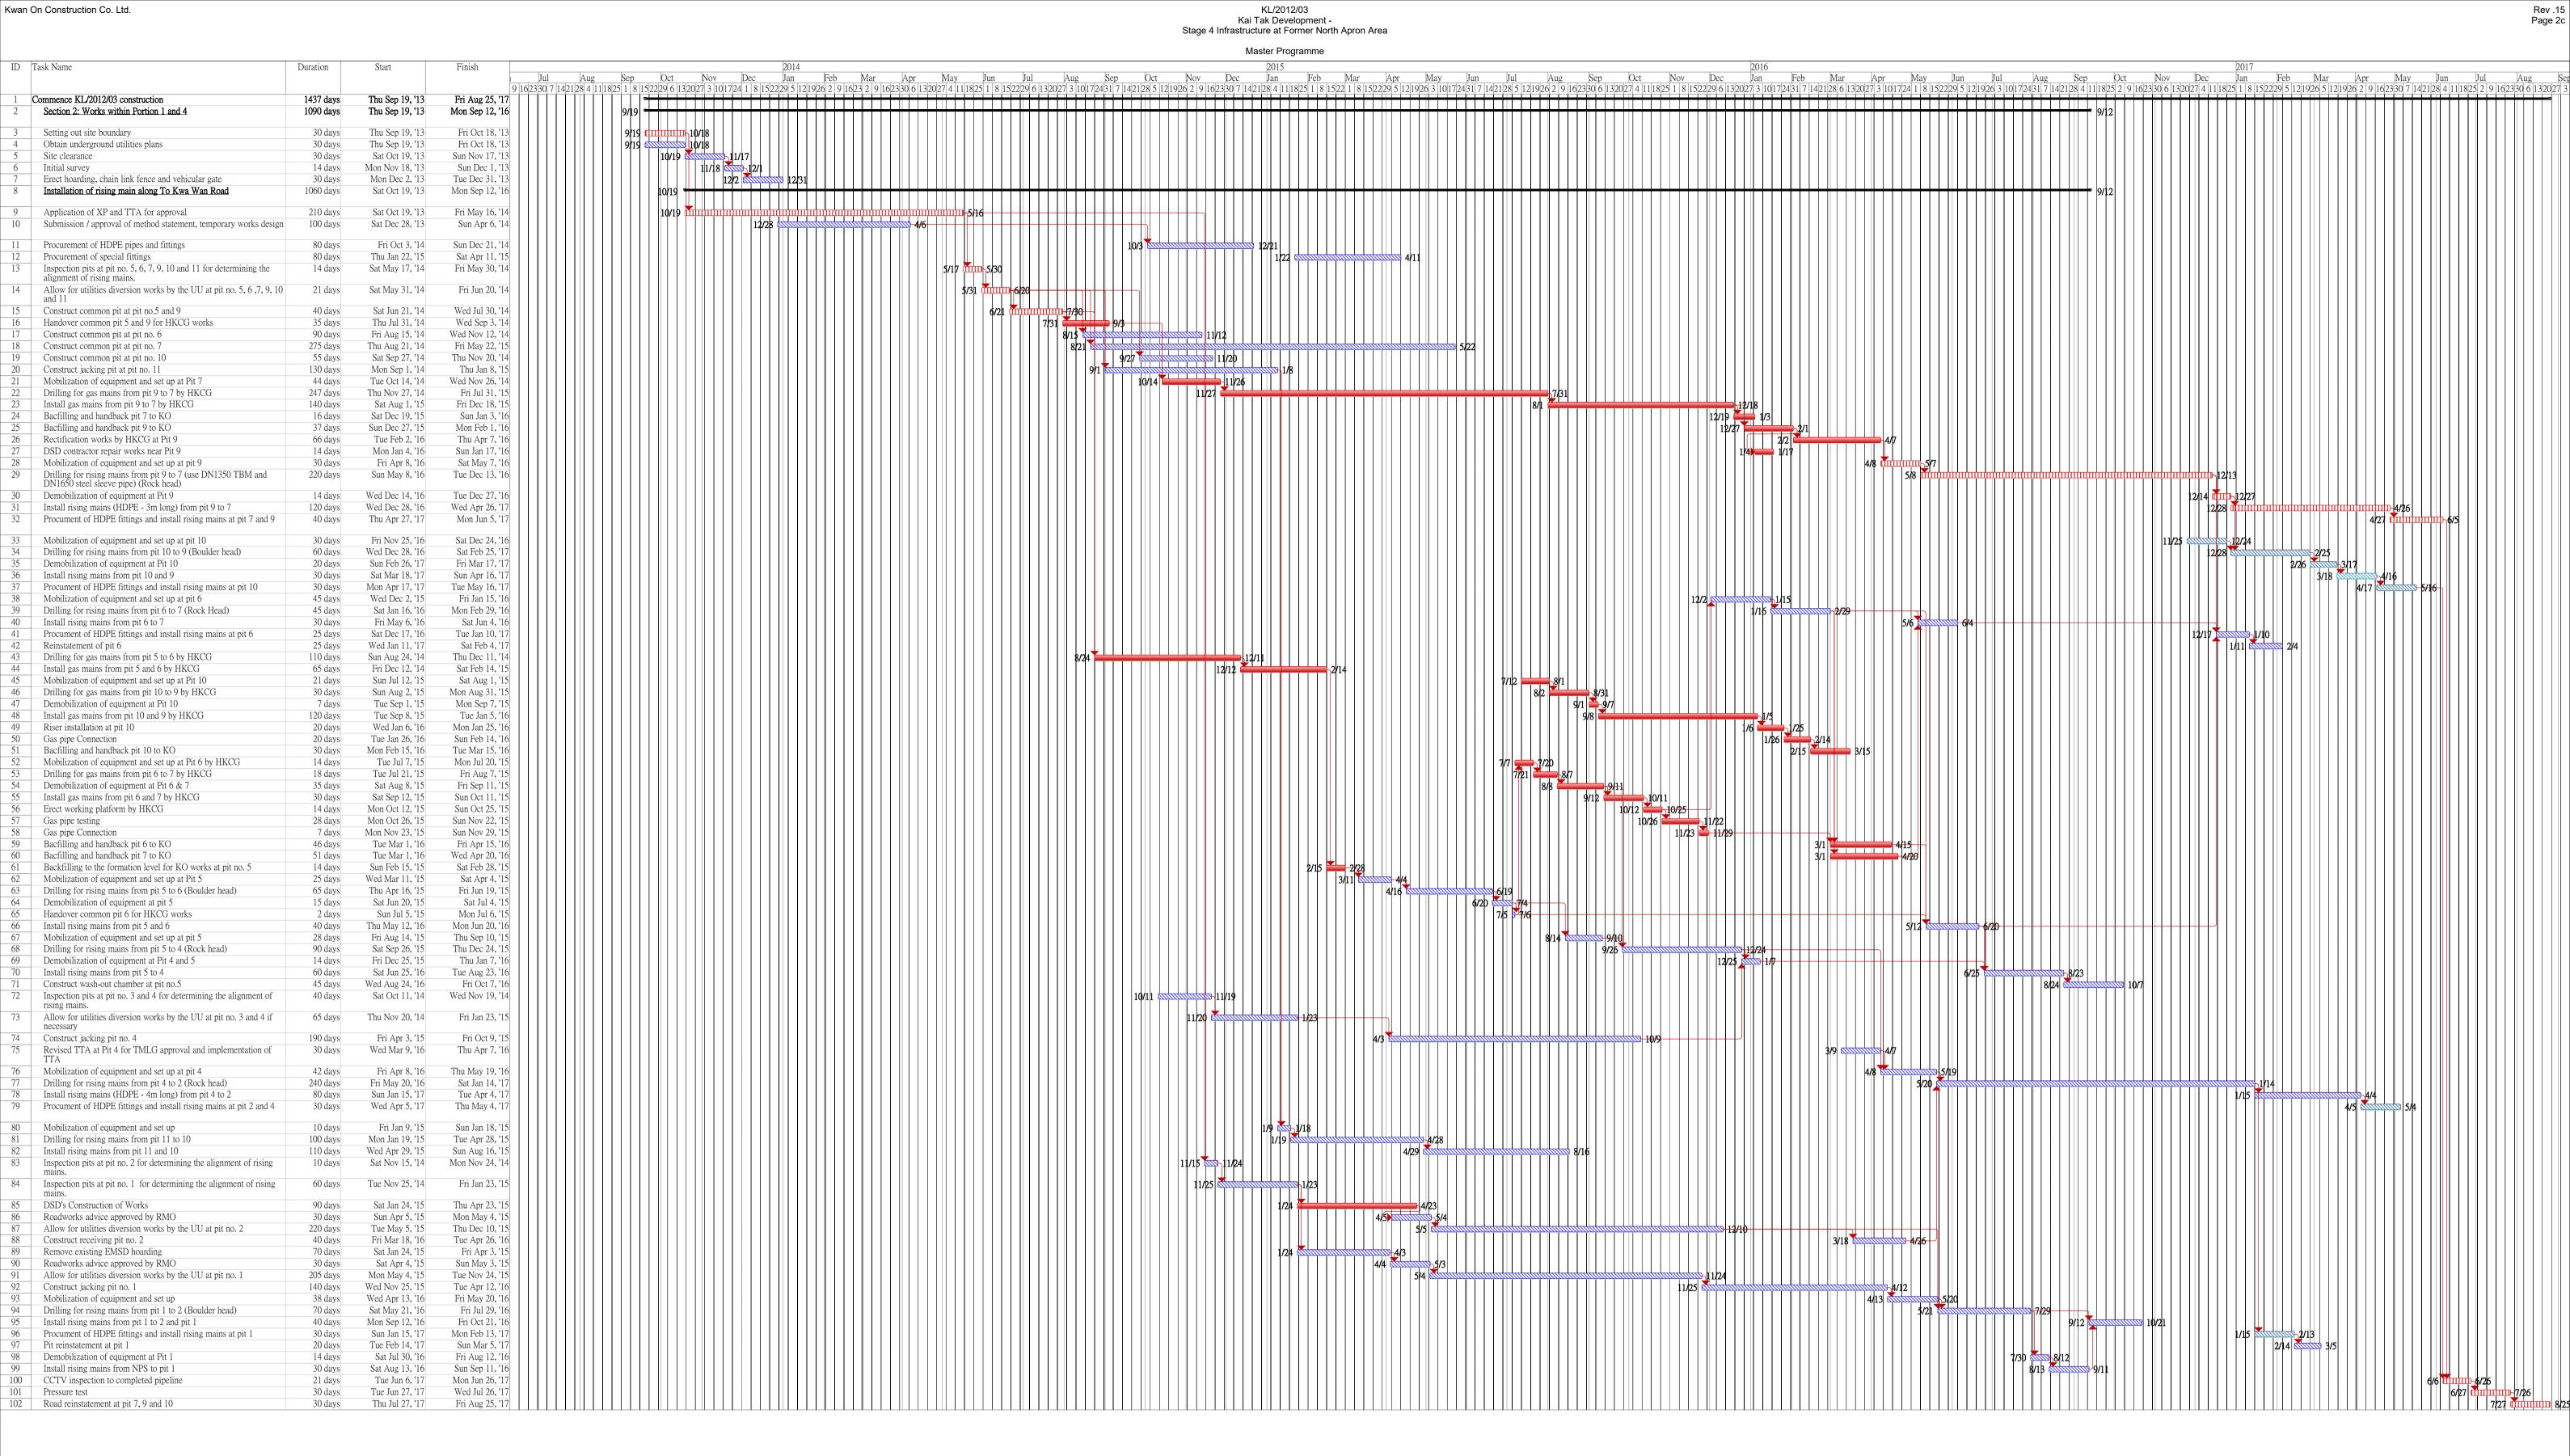

Master Programme

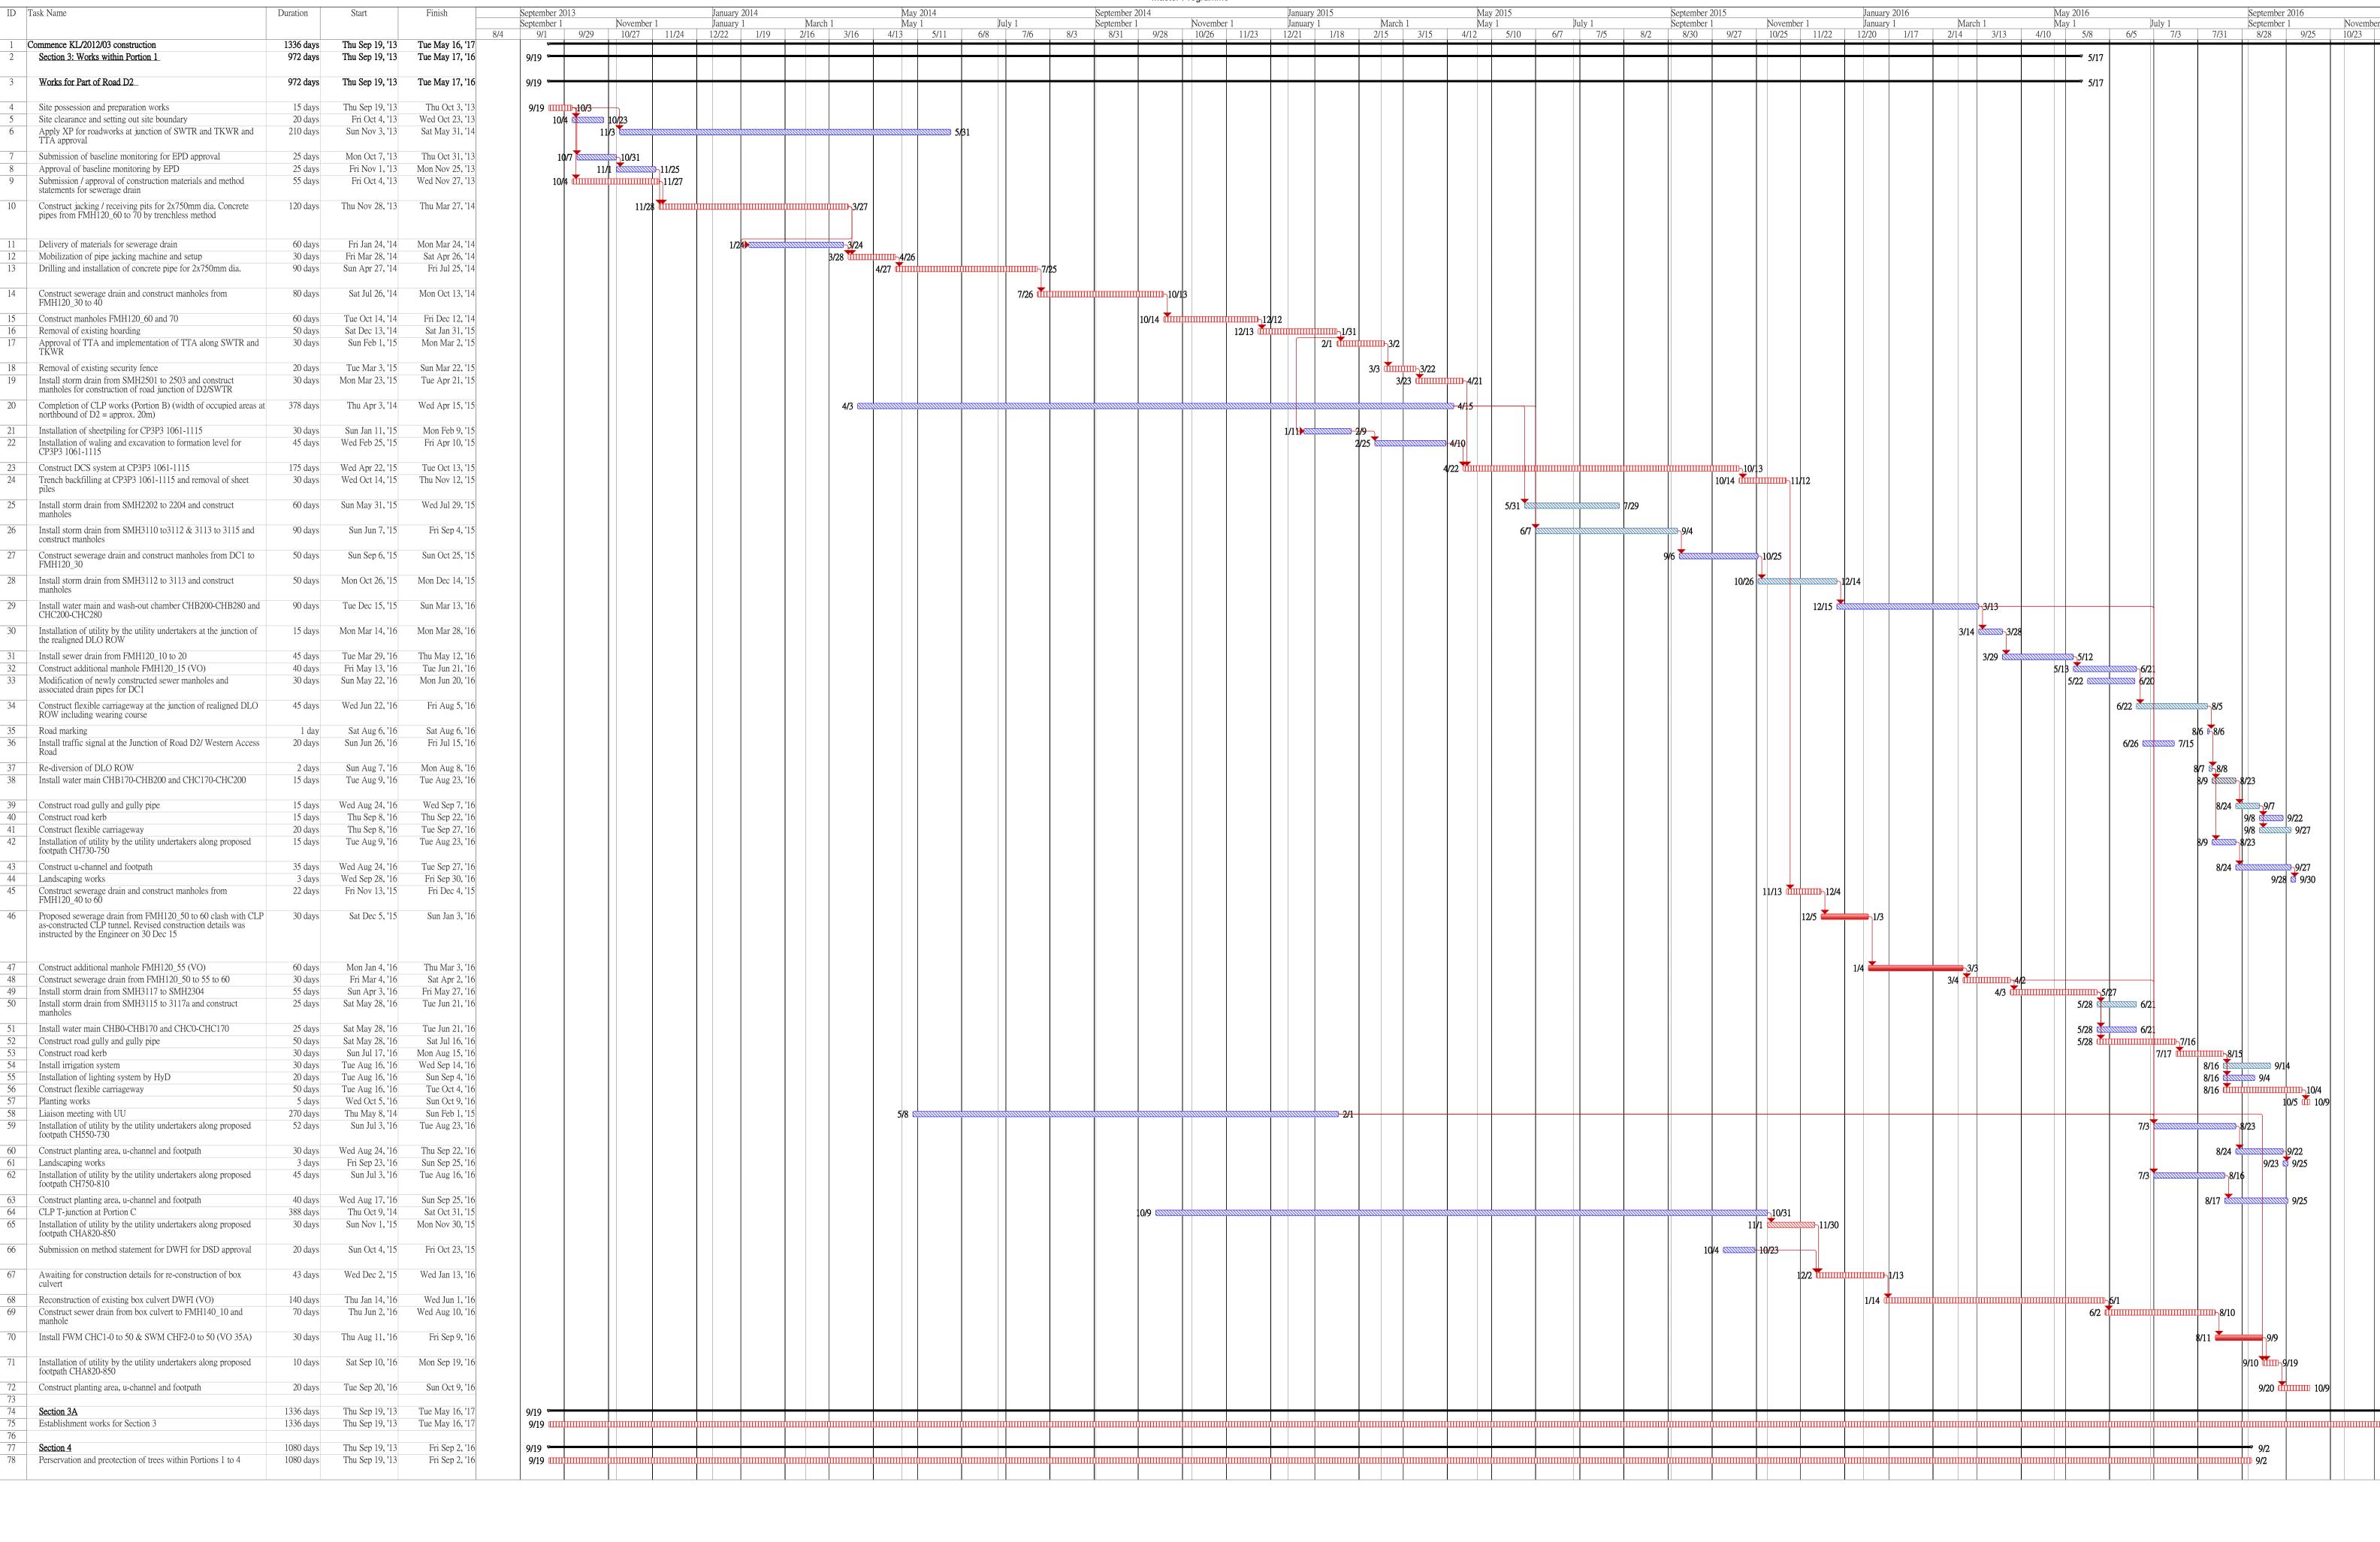

Section 3 Commencement Date: 19 September 2013 Completion Date: 17 May 2016

Critical tasks

Non-critical tasks

Working days

Inactive Milestone

Inactive Summary

Manual Task

Duration-only

Manual Summary Rollup ◆

Manual Summary

Start-only

Finish-only


External Tasks

External Milestone

Kai Tak Development Stage 4 Infrastructure at Former North Apron Area

Master Programme

Master Programme ID Task Name September 2015 September 2013 September 2014 January 2015 September 1 September 1 September 1 November 1 November 1 January 1 Commence KL/2012/03 construction Thu Sep 19, '13 Thu Sep 15, '16 Section 5: Works for Southbound of Road D2 1093 days Thu Sep 19, '13 Thu Sep 15, '16 **9/19** Awaiting for the notification of commencement of works by the Engineer **⊚** 12/24 97 days Thu Sep 19, '13 Tue Dec 24, '13 **9/19** Completion of DCS works for CH3P3-970 to 1030 372 days Wed Dec 25, '13 12/25 Wed Dec 31, '14 Installation of utility by the utility undertakers along proposed footpath 20 days Mon Aug 29, '16 Sat Sep 17, '16 Construct drainpit and u-channel Sun Sep 18, '16 Wed Oct 12, '16 9/18 🖎 Install street lighting 15 days Sun Sep 25, '16 Sun Oct 9, '16 20 days Installation of lighting system by HyD Mon Oct 10, '16 Sat Oct 29, '16 Construct footpath, planting area and concrete run-in 35 days Mon Oct 17, '16 Sun Nov 20, '16 11/21 🕈 11/23 Landscape works Mon Nov 21, '16 Wed Nov 23, '16 Construct stormwater drain and manholes 17 days Mon Aug 15, '16 Wed Aug 31, '16 8/15 8/31 Construct road gully with pipes 15 days Thu Sep 1, '16 Thu Sep 15, '16 Construct road kerb 15 days Fri Sep 16, '16 Fri Sep 30, '16 Construct flexible carriageway 30 days Sat Oct 1, '16 Sun Oct 30, '16 Road marking Mon Oct 31, '16 Mon Oct 31, '16 Construct CLP tunnel by CLP Portion B 413 days Fri Feb 28, '14 Thu Apr 16, '15 610 days Completion of DCS works for CH3P3-1030 to 1115 Thu Jan 1, '15 Thu Sep 1, '16 Installation of utility by the utility undertakers along proposed footpath 25 days Sun Sep 18, '16 Wed Oct 12, '16 9/18 Construct drainpit and u-channel Thu Oct 13, '16 Fri Nov 11, '16 Wed Nov 23, '16 11/12 11/23 Sat Nov 12, '16 Install street lighting Construct footpath, planting area and concrete run-in 39 days Thu Oct 13, '16 Sun Nov 20, '16 11/21 🕈 11/23 3 days Landscape works Mon Nov 21, '16 Wed Nov 23, '16 33 days Construct stormwater drain and manholes Fri Sep 2, '16 Tue Oct 4, '16 Wed Oct 5, '16 Construct road gully with pipes 16 days Thu Oct 20, '16 Construct road kerb Fri Oct 21, '16 Fri Nov 4, '16 10/21 11/4 25 days Sat Nov 5, '16 Construct flexible carriageway Tue Nov 29, '16 Road marking Wed Nov 30, '16 Wed Nov 30, '16 Completion of DCS works for CH3P3-930 to 970 141 days Wed Jul 1, '15 Wed Nov 18, '15 Construct CLP tunnel by CLP Portion F1 126 days Thu Nov 19, '15 Wed Mar 23, '16 8/15 Installation of utility by the utility undertakers along proposed footpath 31 days Mon Aug 15, '16 Wed Sep 14, '16 Wed Oct 19, '16 Construct drainpit and u-channel Thu Sep 15, '16 9/15 20 days Thu Sep 15, '16 Install street lighting Tue Oct 4, '16 40 days Thu Sep 15, '16 Mon Oct 24, '16 Construct footpath, planting area and concrete run-in 10/25 📉 10/31 7 days Tue Oct 25, '16 Mon Oct 31, '16 Landscape works 45 days Mon May 2, '16 6/15 Construct stormwater drain and manholes Wed Jun 15, '16 40 days Thu Jun 16, '16 Mon Jul 25, '16 Construct road gully with pipes 7/26 8/4 Construct road kerb 10 days Tue Jul 26, '16 Thu Aug 4, '16 Construct flexible carriageway 40 days Fri Aug 5, '16 Tue Sep 13, '16 9/14 9/15 Road marking Wed Sep 14, '16 Thu Sep 15, '16 Completion of DCS works for CH3P3-370 to 520 400 days Sun Dec 28, '14 Sun Jan 31, '16 Completion of DCS works for CH3P3-350 to 370 120 days Sun Oct 4, '15 Sun Jan 31, '16 Completion of DCS works for CH3P3-520 to 570 Thu Feb 11, '16 10/25 110 days Sun Oct 25, '15 Installation of utility by the utility undertakers along proposed footpath 35 days Sun Aug 28, '16 Sat Oct 1, '16 8/28 44 Construct drainpit and u-channel Sun Oct 2, '16 Tue Nov 15, '16 Install street lighting 20 days Sun Oct 2, '16 Fri Oct 21, '16 Construct footpath, planting area and concrete run-in 45 days Tue Nov 15, '16 Sun Oct 2, '16 Wed Nov 16, '16 Tue Nov 22, '16 11/16 🔖 11/22 7 Landscape works Sun Aug 28, '16 Construct stormwater drain and manholes Mon Sep 26, '16 Construct road gully with pipes Tue Sep 27, '16 Sun Oct 16, '16 10/17 50 Construct road kerb Mon Oct 17, '16 Sat Nov 5, '16 Construct flexible carriageway 20 days Fri Nov 25, '16 Sun Nov 6, '16 3 days 11/26 🕈 11/28 Road marking Sat Nov 26, '16 Mon Nov 28, '16 Completion of DCS works for CH3P3-570 to 730 Sat Sep 19, '15 Tue Apr 5, '16 9/19 🛚 8/21 Installation of utility by the utility undertakers along proposed footpath 35 days Sun Aug 21, '16 Sat Sep 24, '16 55 Construct drainpit and u-channel Sun Sep 25, '16 Fri Nov 18, '16 9/25 56 Install street lighting Sun Sep 25, '16 Fri Oct 14, '16 9/25 Construct footpath, planting area and concrete run-in 50 days Sun Sep 25, '16 Sun Nov 13, '16 11/14 📩 11/20 58 Landscape works 7 days Mon Nov 14, '16 Sun Nov 20, '16 59 Construct stormwater drain and manholes 40 days Sun May 29, '16 Thu Jul 7, '16 5/29 29 days Fri Jul 8, '16 Fri Aug 5, '16 60 Construct road gully with pipes 61 Construct road kerb 20 days Sat Aug 6, '16 Thu Aug 25, '16 20 days 62 Construct flexible carriageway Fri Aug 26, '16 Wed Sep 14, '16 9/15 9/15 Thu Sep 15, '16 Thu Sep 15, '16 63 Road marking 64 Completion of DCS works for CH3P3-730 to 830 Mon Mar 2, '15 Mon Nov 16, '15 65 Cable duct block by CLP 126 days Tue Nov 17, '15 Mon Mar 21, '16 11/17 240 days Mon Apr 27, '15 Completion of DCS works for CH3P3-830 to 930 (except 860 to 900) Tue Dec 22, '15 <u>№ 12/22</u> Installation of utility by the utility undertakers along proposed footpath 40 days Sun Aug 28, '16 Thu Oct 6, '16 68 Construct drainpit and u-channel Fri Oct 7, '16 Sun Nov 20, '16 69 Install street lighting 20 days Fri Oct 7, '16 Wed Oct 26, '16 10/7 Construct footpath, planting area and concrete run-in 45 days Fri Oct 7, '16 Sun Nov 20, '16 Mon Nov 21, '16 Sun Nov 27, '16 Landscape works 21 days Sun Mar 27, '16 Sat Apr 16, '16 Construct stormwater drain and manholes 3/27 4/16 Proposed sewer drain FMH120\_20 to 10 clash with as-constructed CLP's 10 days Sun Apr 17, '16 Tue Apr 26, '16 4/17 4/26 cable tunnel. Further instruction is required Construct additional manhole with backdrop (VO) Wed Apr 27, '16 Sun Jun 5, '16 Mon Jun 6, '16 Wed Jul 20, '16 Construct road gully with pipes 7/21 8/10 8/10 Thu Jul 21, '16 Construct road kerb 20 days Tue Aug 9, '16 Construct flexible carriageway 35 days Wed Aug 10, '16 Tue Sep 13, '16 9/14 9/15 Road marking 2 days Wed Sep 14, '16 Thu Sep 15, '16 Completion of DCS works for CH3P3-860 to 900 for realignment of DLO 110 days Sun Apr 17, '16 Thu Aug 4, '16 ROW including wearing course 80 Installation of utility by the utility undertakers along proposed footpath Fri Aug 5, '16 Wed Aug 24, '16 8/20 Fri Aug 5, '16 Sat Aug 20, '16 81 Construct stormwater drain and manholes 8/21 8/30 82 Construct road gully with pipes Sun Aug 21, '16 Tue Aug 30, '16 8/31 \$\square{5}9/4 83 Construct road kerb 5 days Wed Aug 31, '16 Sun Sep 4, '16 9/5 5 9/14 84 Construct flexible carriageway 10 days Mon Sep 5, '16 Wed Sep 14, '16 85 Road marking 1 day Thu Sep 15, '16 9/15 9/15 Thu Sep 15, '16

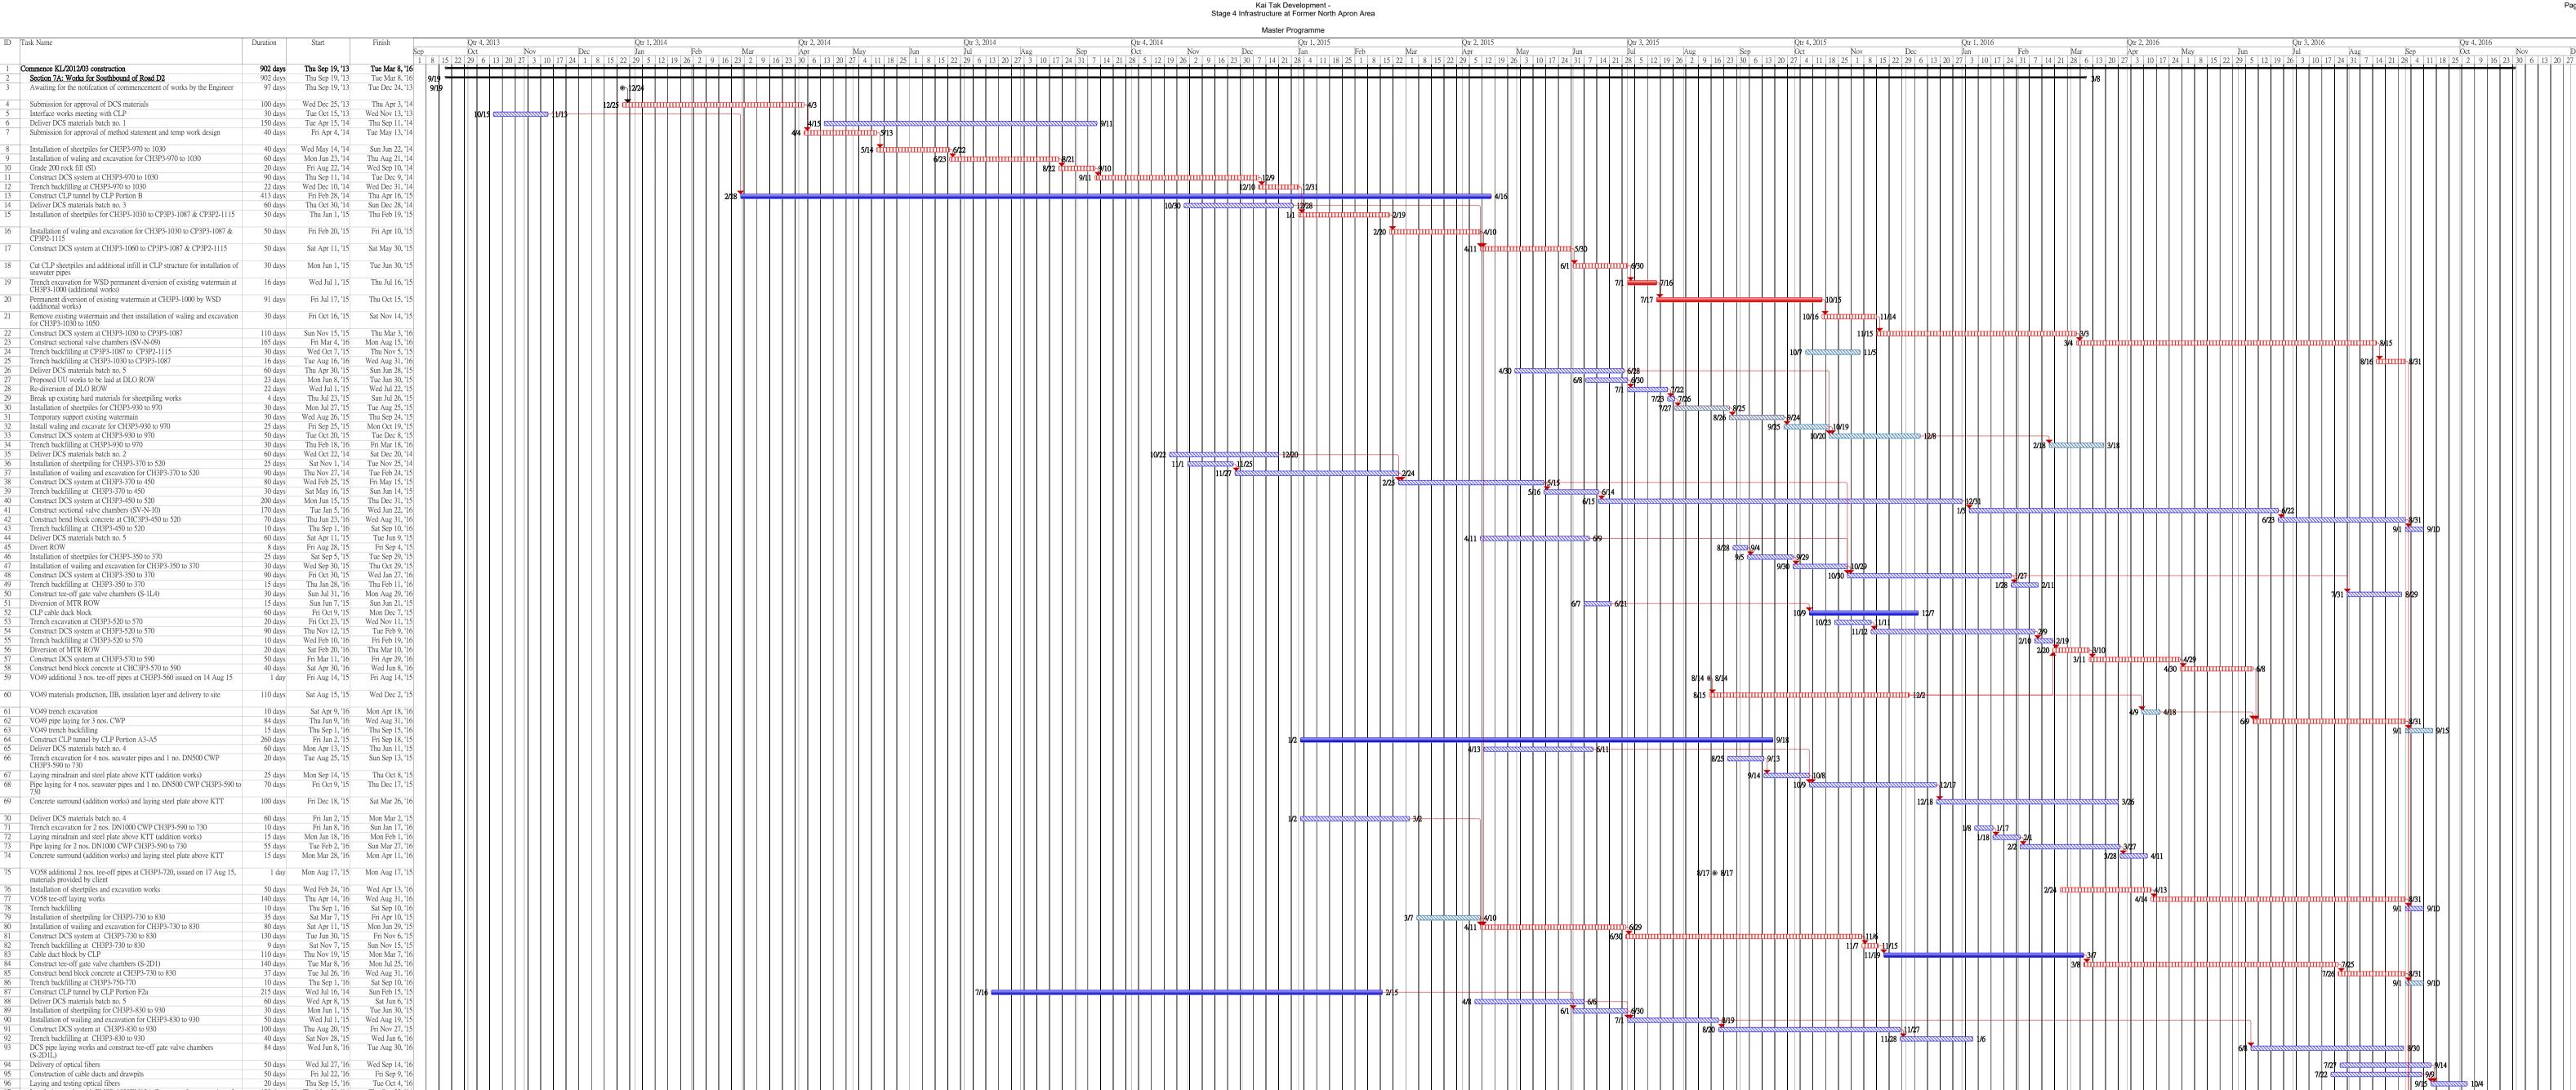

Laying and testing optical fibers

99 Swabbing, pressure test and chemical test for DCS Pipes

98 CCTV for DCS pipes


Interfacing works with EMSD 1020EM12A Contractor for connection of the proposed four seawater pipes and three chilled water pipes in Section C to their construction of seawater pipes and chilled water pipes

120 days Thu May 29, '14 Thu Sep 25, '14

100 days Sun May 22, '16 Mon Aug 29, '16 60 days Thu Sep 1, '16 Sun Oct 30, '16

Working days Inactive Milestone Inactive Summary Manual Task Critical tasks Duration-only Manual Summary Rollup ◆ Start-only Finish-only External Tasks External Milestone Updated on 29 July 2016

|                                                                                                                                 |                    |                                        |                                    |               |                   |                                          |                                          | Programr                   | me for Installation of DCS Pipelines | ( Revised Design) within Portio | n 3               |                           |      |                               |                                         |                     |                  |                       |                           |                                         |                   |   |
|---------------------------------------------------------------------------------------------------------------------------------|--------------------|----------------------------------------|------------------------------------|---------------|-------------------|------------------------------------------|------------------------------------------|----------------------------|--------------------------------------|---------------------------------|-------------------|---------------------------|------|-------------------------------|-----------------------------------------|---------------------|------------------|-----------------------|---------------------------|-----------------------------------------|-------------------|---|
| ID Task Name                                                                                                                    | Duration           | Start                                  | Finish                             |               | May 2015<br>May 1 | July 1                                   | September 2015<br>September 1            | November 1                 | January 2016<br>January 1            | March 1                         | May 2016<br>May 1 | July 1                    |      | September 2016<br>September 1 | N                                       | Jovember 1          |                  | nuary 2017<br>nuary 1 | March 1                   |                                         | May 2017<br>May 1 |   |
| 1 Section 7B: Open Cut Section and Heading Section                                                                              | 763 days           | Fri Apr 3, '15                         | Thu May 4, '17                     | 15 12         | 10 7              | 5 2                                      | 30 27                                    | 25 22                      | 2 20 17                              | 14 13                           | 10 8              | 5                         | 3 31 | 28                            | 25                                      | 23 20               | 18               | 15                    |                           | 2 9                                     | 7                 | 4 |
| 2 Western Approach                                                                                                              |                    |                                        | Tue Jun 28, '16                    | 4/3           |                   |                                          |                                          |                            |                                      |                                 |                   | 6/29                      |      |                               |                                         |                     |                  |                       |                           |                                         |                   |   |
| 3 Submission for temporary ELS system and approval                                                                              | 14 days            | Fri Apr 3, '15                         | Thu Apr 16, '15                    | 4/3 4/17 4/16 |                   |                                          |                                          |                            |                                      |                                 |                   | 0/28                      |      |                               |                                         |                     |                  |                       |                           |                                         |                   |   |
| <ul> <li>Install sheet piles at formation level</li> <li>Submission for revised temporary ELS system and approval</li> </ul>    |                    | Fri Apr 17, '15<br>Sat May 23, '15     | Fri May 22, '15<br>Fri Jun 5, '15  | 4/17          | 5/22              |                                          |                                          |                            |                                      |                                 |                   |                           |      |                               |                                         |                     |                  |                       |                           |                                         |                   |   |
|                                                                                                                                 |                    |                                        |                                    |               | <b>_</b>          |                                          |                                          |                            |                                      |                                 |                   |                           |      |                               |                                         |                     |                  |                       |                           |                                         |                   |   |
| 6 Install waling 7 Install strut                                                                                                |                    |                                        | Tue Jun 16, '15<br>Wed Jul 1, '15  |               | 6/6 dilling 6/16  | <b>1</b> /1                              |                                          |                            |                                      |                                 |                   |                           |      |                               |                                         |                     |                  |                       |                           |                                         |                   |   |
| 8 Trench excavation down to 2m and 8m long for drilling                                                                         | 13 days            |                                        | Tue Jul 14, '15                    |               |                   | 7/14                                     |                                          |                            |                                      |                                 |                   |                           |      |                               |                                         |                     |                  |                       |                           |                                         |                   |   |
| horizontal pipe-piles  9 Submission for heading method                                                                          | 20 days            | Fri Jul 17, '15                        | Wed Aug 5, '15                     |               |                   | 7/17                                     |                                          |                            |                                      |                                 |                   |                           |      |                               |                                         |                     |                  |                       |                           |                                         |                   |   |
| 10 Comment on heading method                                                                                                    |                    | Thu Aug 6, '15 N                       |                                    |               |                   | 8/6 11 8/10                              | 0/0                                      |                            |                                      |                                 |                   |                           |      |                               |                                         |                     |                  |                       |                           |                                         |                   |   |
| 11 Mobilization and set up for drilling works 12 Drilling for 219 dia. pipe-piles                                               |                    | Tue Aug 11, '15 Thu Sep 10, '15        |                                    |               |                   |                                          | 9/10 11111111111111111111111111111111111 | 0/14                       |                                      |                                 |                   |                           |      |                               |                                         |                     |                  |                       |                           |                                         |                   |   |
| 13 Review design for heading method 14 Grout trial to obtain design parameter                                                   |                    | Thu Oct 15, '15<br>Sat Nov 14, '15     |                                    |               |                   |                                          | 9/10 10/15                               | 11/13                      |                                      |                                 |                   |                           |      |                               |                                         |                     |                  |                       |                           |                                         |                   |   |
| 15 Update method statement for heading method                                                                                   | 3 days             | Tue Nov 24, '15                        | Thu Nov 26, '15                    |               |                   |                                          |                                          | 11/14 11/23<br>11/24 11/26 | 6                                    |                                 |                   |                           |      |                               |                                         |                     |                  |                       |                           |                                         |                   |   |
| 16 Upon grout trial successful, proceed with drilling for all grout holes and grouting                                          | 52 days            | Fri Nov 27, '15                        | Sun Jan 17, '16                    |               |                   |                                          |                                          | 11/27 111111               | 1/17                                 |                                 |                   |                           |      |                               |                                         |                     |                  |                       |                           |                                         |                   |   |
| 17 Rectification of existing ELS system                                                                                         |                    | Mon Jan 18, '16                        |                                    |               |                   |                                          |                                          |                            | 1/18                                 |                                 | <u>4</u> /26      |                           |      |                               |                                         |                     |                  |                       |                           |                                         |                   |   |
| Release of suspension of works order Fixing bottom layer reinforcement bar (Additional works - no                               |                    | Wed Apr 27, '16 Fri May 13, '16        |                                    |               |                   |                                          |                                          |                            |                                      |                                 | 4/27              | D-5/28                    |      |                               |                                         |                     |                  |                       |                           |                                         |                   |   |
| steel bar shown on original design)                                                                                             |                    |                                        | Wed Jun 1, '16                     |               |                   |                                          |                                          |                            |                                      |                                 |                   |                           |      |                               |                                         |                     |                  |                       |                           |                                         |                   |   |
| 20 Concreting up to bottom level of sleeve pipe 21 Install 1 no. DN2800 dia sleeve pipe and 4 nos. DN2100 dia.                  |                    |                                        | Sun Jun 5, '16                     |               |                   |                                          |                                          |                            |                                      |                                 | 5/29              | 6/2 45/6/5                |      |                               |                                         |                     |                  |                       |                           |                                         |                   |   |
| Sleeve pipe  Concreting up to middle level of sleeve pipe                                                                       |                    |                                        | Tue Jun 7, '16                     |               |                   |                                          |                                          |                            |                                      |                                 |                   | 6/6 6/7                   |      |                               |                                         |                     |                  |                       |                           |                                         |                   |   |
| Concreting up to top level of sleeve pipe                                                                                       | 3 days             | Wed Jun 8, '16                         | Fri Jun 10, '16                    |               |                   |                                          |                                          |                            |                                      |                                 |                   | 6/8 6/10                  |      |                               |                                         |                     |                  |                       |                           |                                         |                   |   |
| Fixing top layer reinforcement bar (Additional works - no steel bar shown on original design)                                   | 3 days             | Sat Jun 11, '16                        | Mon Jun 13, '16                    |               |                   |                                          |                                          |                            |                                      |                                 |                   | 6/11 6/13                 |      |                               |                                         |                     |                  |                       |                           |                                         |                   |   |
| 25 Concreting up to final level of concrete surround                                                                            |                    | Tue Jun 14, '16                        |                                    |               |                   |                                          |                                          |                            |                                      |                                 |                   | 6/14 6/16                 |      |                               |                                         |                     |                  |                       |                           |                                         |                   |   |
| 26 Backfilling and remove stage 1 strut and waling 27 Remove sheetpiles and filling the gap                                     |                    | Fri Jun 17, '16<br>Wed Jun 22, '16     |                                    |               |                   |                                          |                                          |                            |                                      |                                 |                   | 6/17 (6/21<br>6/22 (6/28  |      |                               |                                         |                     |                  |                       |                           |                                         |                   |   |
| 28 Grade 400 rock fill (additional works)                                                                                       | 15 days            | Sun Nov 15, '15                        | Sun Nov 29, '15                    |               |                   |                                          |                                          | 11/15                      | /29                                  |                                 |                   | 0.22                      |      |                               |                                         |                     |                  |                       |                           |                                         |                   |   |
| 29 Blinding layer for PJ-N-02 30 Construct base slab of PJ-N-02                                                                 |                    | Mon Nov 30, '15<br>Sun Dec 20, '15     | Sat Dec 19, 15<br>Sat Jan 23, '16  |               |                   |                                          |                                          | 11/30                      | 12/19                                |                                 |                   |                           |      |                               |                                         |                     |                  |                       |                           |                                         |                   |   |
| 31 Construct wall of PJ-N-02 up to +3mPD                                                                                        |                    | Sun Jun 12, '16 V                      | Wed Aug 10, '16                    |               |                   |                                          |                                          |                            | 1.13                                 |                                 |                   | 6/12                      | 8/11 |                               |                                         |                     |                  |                       |                           |                                         |                   |   |
| 32 Soil Backfilling up to +2.8mPD 33 Construct top slab of PJ-N-02                                                              |                    | Thu Aug 11, '16 V<br>Thu Aug 25, '16   |                                    |               |                   |                                          |                                          |                            |                                      |                                 |                   |                           | 8/11 | 8/24                          | 10/23                                   |                     |                  |                       |                           |                                         |                   |   |
| 34 Soil Backfilling up to formation level                                                                                       | 8 days             | Mon Oct 24, '16                        | Mon Oct 31, '16                    |               |                   |                                          |                                          |                            |                                      |                                 |                   |                           | 0,25 |                               | 10/24                                   | 10/31               |                  |                       |                           |                                         |                   |   |
| Remove strut and waling Remove sheetpiles and filling the gap                                                                   |                    | Tue Nov 1, '16 Fri Nov 11, '16         |                                    |               |                   |                                          |                                          |                            |                                      |                                 |                   |                           |      |                               | 11/1                                    | 11/10<br>1/11 11/20 |                  |                       |                           |                                         |                   |   |
| Hand back the site to CCC's                                                                                                     | 2 days             | Wed Jun 29, '16                        | Thu Jun 30, '16                    |               |                   |                                          |                                          |                            |                                      |                                 |                   | 6/29 <b>1</b> 6/30<br>7/1 |      |                               |                                         |                     |                  |                       |                           |                                         |                   |   |
| 38 Construction of remaining box culvert by CCC's.  39 Section 7B: Open-cut Section & Heading from Eastern Approach             |                    | Fri Jul 1, '16<br>Mon Jul 27, '15      | Fri Oct 28, '16<br>Thu May 4, '17  |               |                   | 7/27                                     |                                          |                            |                                      |                                 |                   | 7/1                       |      |                               | 100000000000000000000000000000000000000 | 0/28                |                  |                       |                           |                                         | 5/4               |   |
| Approach  40 Submission for temporary ELS system and approval                                                                   |                    |                                        | Sun Aug 9, '15                     |               |                   | 7/27 11111111111111111111111111111111111 |                                          |                            |                                      |                                 |                   |                           |      |                               |                                         |                     |                  |                       |                           |                                         |                   |   |
| 41 Site possession                                                                                                              | 1 day              | Mon Aug 10, '15 N                      | Mon Aug 10, '15                    |               |                   | 8/10 <b>5</b> 8/10                       |                                          |                            |                                      |                                 |                   |                           |      |                               |                                         |                     |                  |                       |                           |                                         |                   |   |
| <ul><li>Install sheet piles</li><li>Install 1st layer waling and strut and excavate to 2nd layer</li></ul>                      |                    | Tue Aug 11, '15<br>Sat Sep 5, '15      | Fri Sep 4, '15                     |               |                   | 8/11                                     | 9/5 11111111111-9/24                     |                            |                                      |                                 |                   |                           |      |                               |                                         |                     |                  |                       |                           |                                         |                   |   |
|                                                                                                                                 |                    |                                        |                                    |               |                   |                                          |                                          |                            |                                      |                                 |                   |                           |      |                               |                                         |                     |                  |                       |                           |                                         |                   |   |
| 44 Install 2nd layer waling and strut and excavate to 3rd layer                                                                 |                    | Fri Sep 25, '15                        |                                    |               |                   |                                          | 9/25                                     | 10/24                      |                                      |                                 |                   |                           |      |                               |                                         |                     |                  |                       |                           |                                         |                   |   |
| 45 Install 3rd layer waling and strut and excavate to 4th layer                                                                 | 30 days            | Sun Oct 25, '15 N                      | Mon Nov 23, '15                    |               |                   |                                          | 10/                                      | 25 11/23                   |                                      |                                 |                   |                           |      |                               |                                         |                     |                  |                       |                           |                                         |                   |   |
| 46 Install 4th layer waling and strut and excavate to formation level                                                           | 30 days            | Tue Nov 24, '15 V                      | Wed Dec 23, '15                    |               |                   |                                          |                                          | 11/24                      | 12/23                                |                                 |                   |                           |      |                               |                                         |                     |                  |                       |                           |                                         |                   |   |
| 47 Drilling for 50 dia. grout holes at 2 layers and grouting                                                                    |                    | Thu Dec 24, '15                        |                                    |               |                   |                                          |                                          |                            | 12/24                                | 2/11 <sub>2</sub>               |                   |                           |      |                               |                                         |                     |                  |                       |                           |                                         |                   |   |
| <ul> <li>Strengthening existing ELS system</li> <li>Preparation of method statement for hand-shield construction and</li> </ul> |                    | Fri Feb 12, '16 Sun Feb 21, '16        |                                    |               |                   |                                          |                                          |                            | 2/                                   | /12 2/21 3/22                   | ,                 |                           |      | 10                            |                                         |                     |                  |                       |                           |                                         |                   |   |
| approval                                                                                                                        |                    |                                        |                                    |               |                   |                                          |                                          |                            |                                      | 2/21                            |                   |                           | 0/   | 10                            |                                         |                     |                  |                       |                           |                                         |                   |   |
| 50 Mobilize equipment & materials 51 <b>Pipeline 1 - DN2100</b>                                                                 |                    | Fri Aug 19, '16 Wed Aug 31, '16        |                                    |               |                   |                                          |                                          |                            |                                      |                                 |                   |                           | 8/19 | 8/30                          |                                         | 11/15               |                  |                       |                           |                                         |                   |   |
| 52 Ground treatment works                                                                                                       | 7 days             | Wed Aug 31, '16                        | Tue Sep 6, '16                     |               |                   |                                          |                                          |                            |                                      |                                 |                   |                           | 8    | /31 00009/6                   |                                         |                     |                  |                       |                           |                                         |                   |   |
| 53 Pipe jacking 54 DN1400 installation works                                                                                    | -                  |                                        | Sun Oct 16, '16<br>Wed Nov 9, '16  |               |                   |                                          |                                          |                            |                                      |                                 |                   |                           |      | 9/7                           | 10/17                                   | 11/9                |                  |                       |                           |                                         |                   |   |
| 55 Annulus grout                                                                                                                | 6 days             | Thu Nov 10, '16                        | Tue Nov 15, '16                    |               |                   |                                          |                                          |                            |                                      |                                 |                   |                           |      |                               |                                         | /10 11/15           |                  |                       |                           |                                         |                   |   |
| 56 Pipeline 5 - DN2800  57 Ground treatment works                                                                               | 118 days<br>7 days | 3 1 2 1 2 7 2 9                        | Fri Jan 27, '17<br>Sat Oct 8, '16  |               |                   |                                          |                                          |                            |                                      |                                 |                   |                           |      | 10/                           | /210/8                                  |                     |                  | 1/27                  |                           |                                         |                   |   |
| 58 Pipe jacking                                                                                                                 | -                  | Mon Oct 17, '16                        | Mon Dec 5, '16                     |               |                   |                                          |                                          |                            |                                      |                                 |                   |                           |      |                               | 10/17                                   | 12                  | 2/5              | 4/00                  |                           |                                         |                   |   |
| 59 CWP installation works 60 Annulus grout                                                                                      | 46 days<br>7 days  |                                        | Fri Jan 20, '17<br>Fri Jan 27, '17 |               |                   |                                          |                                          |                            |                                      |                                 |                   |                           |      |                               |                                         | 12/6                |                  | 1/20                  |                           |                                         |                   |   |
| 61 Pipeline 3 - DN2100                                                                                                          | 87 days            | Mon Nov 14, '16                        | Wed Feb 8, '17                     |               |                   |                                          |                                          |                            |                                      |                                 |                   |                           |      |                               |                                         | 11/14               |                  |                       | 2/8                       |                                         |                   |   |
| 62 Ground treatment works 63 Pipe jacking                                                                                       |                    | Mon Nov 14, '16<br>Tue Dec 6, '16      | Fri Nov 18, '16<br>Tue Jan 10, '17 |               |                   |                                          |                                          |                            |                                      |                                 |                   |                           |      |                               |                                         | 11/14 11/18 12/6    |                  |                       |                           |                                         |                   |   |
| 64 DN1400 installation works                                                                                                    | 23 days            | Wed Jan 11, '17                        | Thu Feb 2, '17                     |               |                   |                                          |                                          |                            |                                      |                                 |                   |                           |      |                               |                                         | 1210                | 1/               | /11 2/2               |                           |                                         |                   |   |
| 65 Annulus grout 66 <b>Pipeline 2 - DN2100</b>                                                                                  | 5 days<br>92 days  | Fri Feb 3, '17<br>Mon Dec 19, '16 N    | Tue Feb 7, '17<br>Mon Mar 20, '17  |               |                   |                                          |                                          |                            |                                      |                                 |                   |                           |      |                               |                                         | 12                  | 2/19             | 2/3 🚻 2               | 2/7                       | /20                                     |                   |   |
| 67 Ground treatment works                                                                                                       | 7 days             | Mon Dec 19, '16                        | Sun Dec 25, '16                    |               |                   |                                          |                                          |                            |                                      |                                 |                   |                           |      |                               |                                         | 12                  | 2/19 11111 12/25 |                       |                           | = -                                     |                   |   |
| 68 Pipe jacking 69 DN1400 installation works                                                                                    |                    | Wed Jan 11, '17<br>Mon Feb 20, '17     |                                    |               |                   |                                          |                                          |                            |                                      |                                 |                   |                           |      |                               |                                         |                     | 1/               | /11                   | 2/20 11111111111111133/15 |                                         |                   |   |
| 70 Annulus grout                                                                                                                | 5 days             | Thu Mar 16, '17 N                      | Mon Mar 20, '17                    |               |                   |                                          |                                          |                            |                                      |                                 |                   |                           |      |                               |                                         |                     |                  |                       | 3/16 3/16                 | /20                                     |                   |   |
| 71 <b>Pipeline 4 - DN2100</b> 72 Ground treatment works                                                                         |                    | Mon Dec 19, '16 Mon Dec 19, '16        |                                    |               |                   |                                          |                                          |                            |                                      |                                 |                   |                           |      |                               |                                         | 12                  | 2/19<br>2/19     | 5                     | 3.                        | /20                                     |                   |   |
| 73 Pipe jacking                                                                                                                 | 40 days            | Wed Jan 11, '17                        | Sun Feb 19, '17                    |               |                   |                                          |                                          |                            |                                      |                                 |                   |                           |      |                               |                                         | 12                  |                  | /11                   | 2/19                      |                                         |                   |   |
| 74 DN1400 installation works 75 Annulus grout                                                                                   |                    | Mon Feb 20, '17 V<br>Thu Mar 16, '17 N |                                    |               |                   |                                          |                                          |                            |                                      |                                 |                   |                           |      |                               |                                         |                     |                  |                       | 2/20 3/16 3/15            | /20                                     |                   |   |
| 76 Removal of plant                                                                                                             | 10 days            | Tue Mar 21, '17                        | Thu Mar 30, '17                    |               |                   |                                          |                                          |                            |                                      |                                 |                   |                           |      |                               |                                         |                     |                  |                       | 3/16 11-3.<br>3/21 11     | 3/30                                    |                   |   |
| 77 Backfilling and removal ELS system                                                                                           | 35 days            | Fri Mar 31, '17                        | Thu May 4, '17                     |               |                   |                                          |                                          |                            |                                      |                                 |                   |                           |      |                               |                                         |                     |                  |                       | 3/                        | 31 (11111111111111111111111111111111111 | <b>III</b>  5/4   |   |
|                                                                                                                                 |                    |                                        |                                    |               |                   |                                          |                                          |                            |                                      |                                 |                   |                           |      |                               |                                         |                     |                  |                       |                           |                                         |                   |   |

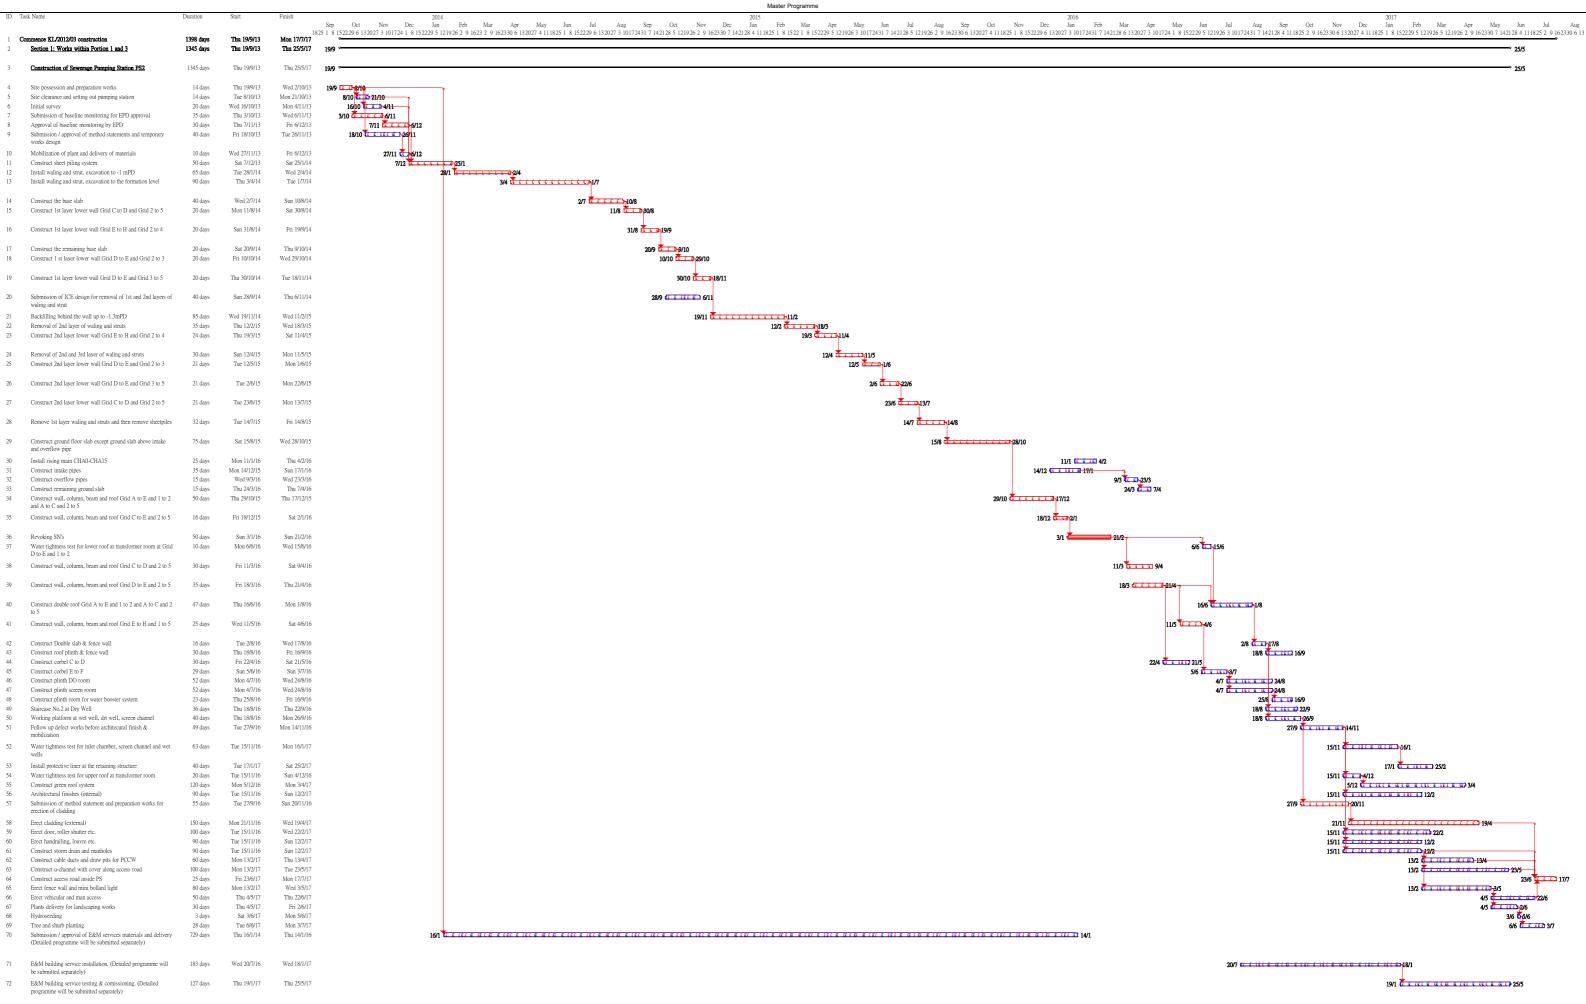

Master Programme

ID Task Name Commence KL/2012/03 construction 1350 days Thu 19/9/13 Tue 30/5/17 Section 2: Works within Portion 1 and 4 1350 days Thu 19/9/13 Tue 30/5/17 19/9 19/9 18/10 30 days Thu 19/9/13 Fri 18/10/13 19/9 ### 18/10 Site clearance 30 days Sat 19/10/13 Sun 17/11/13 4 19/10 11/11 14 days Mon 18/11/13 Sun 1/12/13 6 18/11 12 Initial survey Erect hoarding, chain link fence and vehicular gate Mon 2/12/13 Thu 30/1/14 7 Construction of sewerage pumping station NPS 1350 days Thu 19/9/13 Tue 30/5/17 19/9 Submission / approval of method statements and temporary work 70 days Sun 29/12/13 Sat 8/3/14 Mobilization 20 days Tue 18/3/14 Sun 6/4/14 10 18/3 6/4 Mon 7/4/14 Thu 5/6/14 12,11 Install waling and strut, excavation to the formation level (1st and 90 days Fri 6/6/14 Wed 3/9/14 13 Install waling and strut, excavation to the formation level (3rd 89 days Thu 4/9/14 Mon 1/12/14 14 4/9 29/11 (11/11/12/14/1 Construct the base slab Sat 29/11/14 Wed 14/1/15 Construct the external and internal wall Grid E to G and Grid 2 to 34 days Sat 3/1/15 Thu 5/2/15 3 up to -1.25 mPD 6/2 📥 20/2 Construct the external wall Grid C to E and Grid 2 to 4 up to -0.95 Thu 5/2/15 Sat 11/4/15 Construct the external wall Grid C to E and Grid 1 to 2 up to -0.95 23 days Fri 24/4/15 2/4 Thu 2/4/15 Construct the internal wall Grid D to E up to -0.95 mPD Wed 27/5/15 Sat 20/6/15 20 Backfilling works behind constructed wall and remove 2nd layer 14 days Mon 22/6/15 Sun 5/7/15 21 22/6 🚈 5/7 Construct the external wall Grid C to E and Grid 2 to 4 up to Mon 6/7/15 Thu 30/7/15 25 days Construct the external wall Grid C to E and Grid 1 to 2 up to +2..25 mPD 15 days Fri 31/7/15 Fri 14/8/15 23 31/7 414/8 Construct the internal wall Grid D to E up to +2.25 mPD 7 days Sat 15/8/15 Fri 21/8/15 24 15/8 雄 21/8 Backfilling works behind constructed wall and remove 1st layer of 42 days Sat 15/8/15 Fri 25/9/15 15/8 25/9 waling and strut and sheetpiles Construct the external and internal wall Grid A to E and Grid 1 to 36 days Sat 26/9/15 Sat 31/10/15 26 26/9 31/10 Construct the external and internal wall Grid A to E and Grid 2 to 4 up to  $\pm 4.7$  mPD 31 days Sat 26/9/15 26/9 26/10 Construct the external and internal wall Grid E to G and Grid 2 to 103 days Sat 6/6/15 Wed 16/9/15 6/6 Construct upper wall and column up to beam level Grid A to C 21/11 25/1 66 days Sat 21/11/15 Mon 25/1/16 29 Construct the beam and roof Grid A to C and 1 to 5, Only double ceiling will be divided into two layers for construction 47 days Tue 26/1/16 Sat 12/3/16 30 26/1 12/3 Construct upper wall and column up to beam level Grid E to G 80 days Thu 24/12/15 Sat 12/3/16 24/12 12/3 Construct upper wall and column up to beam level Grid C to E and 1 to 5  $\,$ Tue 22/12/15 Mon 7/3/16 22/12 Construct the beam and roof Grid E to G and 1 to 5 78 days Mon 14/3/16 Mon 30/5/16 14/3 Construct the beam and roof Grid C to E and 1 to 5 Fri 22/4/16 33 46 days 8/3 22/4 31/5 22/6 31/5 22/6 Construct roof plinth and fence wall 23 days Tue 31/5/16 Wed 22/6/16 34 Construct ventilation house 23 days Tue 31/5/16 Wed 22/6/16 34 Construct corbel Grid Cto D 21 days Tue 31/5/16 Mon 20/6/16 34 Construct corbel Grid E to F 21 days Tue 21/6/16 Mon 11/7/16 38 21/6 📥 11/7 Construct Plinth DO room 1 16 days Thu 23/6/16 Fri 8/7/16 36 23/6 23/7 Thu 21/7/16 40 977 2177 Construct Plinth DO room 2 13 days Construct Plinth Room for waterbooster system 20 days Fri 22/7/16 Wed 10/8/16 41 22/7 📥 10/8 21/6 Staircase No1 at Dry Well 35 days Tue 21/6/16 Mon 25/7/16 38 Working plantform at Wet well, Dry weel, screen channel 56 days Tue 21/6/16 Mon 15/8/16 38 Follow up defect works before arcectural finish works & 35 days Tue 16/8/16 Mon 19/9/16 44 16/8 70 days Tue 20/9/16 Water tightness test for retaining structure Mon 28/11/16 45 20/9 W 28/11 29/11 28/12 Install protective liner at the retaining structure Wed 28/12/16 46 Water tightness test for the double ceiling 20 days Thu 29/12/16 Tue 17/1/17 47 29/12 29/17/1 Establishment of green roof system 50 days Wed 18/1/17 Wed 8/3/17 48 18/1 Architectural finishes (internal) Tue 20/9/16 Fri 18/11/16 45 18/11 20/9 🕇 Erect granite tile 90 days Tue 20/9/16 Sun 18/12/16 45 20/9 Erect louvre and door 60 days Tue 20/9/16 Fri 18/11/16 45 20/9 18/11 20/9 Erect handrailing and roller shutter etc. Sun 18/12/16 45 90 days Tue 20/9/16 Install rising main 30 days Tue 16/8/16 Wed 14/9/16 44 Construct sewerage, drainage drain and manhole 46 days Thu 15/9/16 Sun 30/10/16 54 15/9 Fri 17/2/17 59,55,58,57 19/1 47/2 Construct assess road 30 days Thu 19/1/17 Construct cable ducts and draw pits for PCCW and CLP Mon 31/10/16 Fri 9/12/16 55 31/10 9/12 31/10 9/12 10/12 18/1 Construct u-channel with cover along access road 40 days Mon 31/10/16 Fri 9/12/16 55 Wed 18/1/17 55,58,57 Erect vehicular and man access and mini bollard light 40 days Sat 10/12/16 Sat 18/2/17 Sun 19/3/17 56 Preparatory works for landscaping works 7 days 3 days Mon 20/3/17 Sun 26/3/17 60 20/3 26/3 Wed 29/3/17 61,49 27/3 1 29/3 Mon 27/3/17 Hydroseeding Wed 12/4/17 62 Submission / approval of E&M services materials and delivery 793 days Thu 16/1/14 Fri 18/3/16 16/1 20/7 submitted separately) 23/1 E&M building service Testing & Commissioning (Detailed 128 days Mon 23/1/17 Tue 30/5/17 65

evised Completion Date: 30 May 2017

### MATERIALAB CONSULTANTS LIMITED

Room 723 & 725, 7/F, Block B,

Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, : (852)-24508238 : (852)-24508032 Fax Hong Kong. Email : mcl@fugro.com



### Appendix C

**Monthly EM&A Report** For Contract No. KL/2014/01 Kai Tak Development - Stage 2 Infrastructure works for Developments at Southern Part of the Former Runway

#### Civil Engineering and Development Department

#### EP-337/2009 & EP-445/2013/A Contract No. KL/2014/01

#### Kai Tak Development – Stage 2 Infrastructure works for Developments at Southern Part of the Former Runway

Monthly EM&A Report January 2017

(Version 1.0)

Approved By

(Environmental Team Leader)

REMARKS:


The information supplied and contained within this report is, to the best of our knowledge, correct at the time of printing.

CINOTECH accepts no responsibility for changes made to this report by third parties

#### CINOTECH CONSULTANTS LTD

Room 1710, Technology Park, 18 On Lai Street, Shatin, NT, Hong Kong Tel: (852) 2151 2083 Fax: (852) 3107 1388 Email: info@cinotech.com.hk

# 誠管理顧問有限公







Our ref: 6-2-2017

6 th February 2017

By email: clive.cheng@aecom-ktd.com and By post

Supervising Officer Representative

Aecom Asia Co Ltd.

8/F Grand Central Plaza Tower 2

138 Shatin Rural Committee Road

Sha Tin, N.T. Hong Kong

(Attn: Mr. Cheng Chi Hung)

Dear Mr. Cheng,

Re: Contract No. KL/2014/01 (Environmental Permit Nos. EP-337/2009 and EP-445/2013/A)

Kai Tak Development - Stage 2 Infrastructure Works for Developments at Southern Part of the Former Runway

Monthly EM&A report for January 2017

Reference is made to the Environmental Team's submission of the draft Monthly EM&A Report (version 1.0) for January 2017 provided to Independent Environmental Checker (IEC) via email dated on 3 rd February 2017 for review and comment.

Please be informed that IEC has no adverse comment on the captioned submission. IEC writes to verify the captioned submission in accordance with Specific Condition 2.2 of the Environmental Permit No. 337/2009 and 445/2013/A.

Thank you very much for your attention and please feel free to contact the undersigned should you require further information.

Yours faithfully,

For and on behalf of

Ka Shing Management Consultant Limited

Dr. C.F. Ng

Independent Environmental Checker

CEDD C.C.

Mr. Ronald Siu

(By email: ronaldsiu@cedd.gov.hk)

**AECOM** 

Mr. Anthony Lok

(By email: anthony.lok@aecom-ktd.com)

CEC-CCC

Mr. Andrew Wong

(By email: andrew-wong@continental-engineering.com )

Cinotech

Dr. Priscilla Choy

(By email: priscilla.choy@cinotech.com.hk)

SFK

Ms Alice Leung

(By email: aliceleung@sfk.com.hk)





#### TABLE OF CONTENTS

|    | EXECUTIVE SUMMARY Introduction                                            |    |
|----|---------------------------------------------------------------------------|----|
|    | Environmental Monitoring Works                                            |    |
|    | Environmental Licenses and Permits                                        |    |
|    | Key Information in the Reporting Month                                    | 2  |
|    | Future Key Issues                                                         | 2  |
| 1. | INTRODUCTION                                                              | 3  |
|    | Background                                                                | 3  |
|    | Project Organizations                                                     | 4  |
|    | Construction Activities undertaken during the Reporting Month             |    |
|    | Summary of EM&A Requirements                                              | 5  |
| 2. | AIR QUALITY                                                               | 6  |
|    | Monitoring Requirements                                                   | 6  |
|    | Observations                                                              |    |
| 3. | NOISE                                                                     |    |
|    | Monitoring Requirements                                                   | 7  |
|    | Observations                                                              |    |
| 4. | LANDSCAPE AND VISUAL                                                      | 8  |
|    | Monitoring Requirements                                                   | 8  |
|    | Results and Observations                                                  |    |
| 5. | ENVIRONMENTAL AUDIT                                                       | 9  |
|    | Site Audits                                                               | 9  |
|    | Status of Environmental Licensing and Permitting                          |    |
|    | Status of Waste Management                                                | 9  |
|    | Implementation Status of Environmental Mitigation Measures                |    |
|    | Summary of Mitigation Measures Implemented                                |    |
|    | Implementation Status of Event Action Plans                               | 10 |
|    | Summary of Complaint, Warning, Notification of any Summons and Successful |    |
|    | Prosecution                                                               | 11 |
| 6. | FUTURE KEY ISSUES                                                         |    |
|    | Key Issues for the Coming Month                                           | 12 |
| 7. | CONCLUSIONS AND RECOMMENDATIONS                                           | 14 |
|    | Conclusions                                                               | 14 |
|    | Recommendations                                                           | 14 |

#### LIST OF TABLES

| Table I   | Non-compliance Recorded for the Project in the Reporting Month           |
|-----------|--------------------------------------------------------------------------|
| Table II  | Summary Table for Key Information in the Reporting Month                 |
| Table 1.1 | Key Project Contacts                                                     |
| Table 1.2 | Construction Programme Showing the Inter-Relationship with Environmental |
|           | Protection/Mitigation Measures                                           |
| Table 5.1 | Summary of Environmental Licensing and Permit Status                     |
| Table 5.2 | Observations and Recommendations of Site Inspections                     |

#### LIST OF FIGURES

Figure 1 Site Layout Plan

#### LIST OF APPENDICES

| A | Action and Limit Levels                                                                          |
|---|--------------------------------------------------------------------------------------------------|
| В | Summary of Exceedance                                                                            |
| C | Site Audit Summary                                                                               |
| D | Event Action Plans                                                                               |
| E | Environmental Mitigation Implementation Schedule (EMIS)                                          |
| F | Summaries of Environmental Complaint, Warning, Summon and Notification of Successful Prosecution |
| G | Waste Generated Quantity                                                                         |

#### **EXECUTIVE SUMMARY**

#### Introduction

- 1. This is the 10<sup>th</sup> Monthly Environmental Monitoring and Audit Report prepared by Cinotech Consultants Ltd. for "Contract No. KL/2014/01 Kai Tak Development Stage 2 Infrastructure Works for Developments at the Southern Part of the Former Runway" (Hereafter referred to as "the Project"). This contract work comprises two Schedule 2 designated projects (DP), namely the new distributor road D4(part) and roads D3A & D4A serving the planned KTD. The DPs are part of the designated projects under Environmental Permits (EP) No.: EP-337/2009 ("New distributor roads serving the planned Kai Tak Development") and EP-445/2013/A ("Kai Tak Development Roads D3A & D4A") respectively. This report documents the findings of EM&A Works conducted from 1 31 January 2017.
- 2. With reference to the same principle of EIA report of the Project, no air quality monitoring station within 500m and noise monitoring station within 300m from the boundary of this Project are considered as relevant monitoring locations. In such regard, no relevant air quality and noise monitoring location are required for monitoring under the Project. The monitoring works for recommended monitoring stations in EM&A Manual of the DPs are conducted by Kai Tak Development (KTD) Schedule 3 Project.
- 3. The major site activities undertaken in the reporting month included:
  - Watermain works;
  - Construction of boundary wall at EPD recycling centre;
  - Bored piles and Pre-bored socketed H-piles;
  - TTA implementation at Shing Fung Road and Wang Chiu Road / Sheung Yee Road;
  - Open excavation for box culvert, piles caps and underpass; and
  - ELS installation for box culvert and underpass.

#### **Environmental Monitoring Works**

- 4. Environmental monitoring for the Project was performed in accordance with the EM&A Manual and the monitoring results were checked and reviewed. Site Inspections/Audits were conducted once per week. The implementation of the environmental mitigation measures, Event Action Plans and environmental complaint handling procedures were also checked.
- 5. Summary of the non-compliance in the reporting month for the Project is tabulated in Table I.

Table I Non-compliance Recorded for the Project in the Reporting Month

| Parameter | No. of Project-rela | ated Exceedance | Action Taken |
|-----------|---------------------|-----------------|--------------|
| rarameter | Action Level        | Limit Level     | Action Taken |
| Noise     | 0                   | 0               | N/A          |

Environmental Monitoring for Air Quality and Construction Noise

No monitoring for air quality and construction noise is required. No Action/Limit Level exceedance was recorded.

#### **Environmental Licenses and Permits**

- 7. Licenses/Permits granted to the Project include the Environmental Permits (EP) for the Project, EP-337/2009 issued on 23 April 2009 and EP-445/2013 issued on 3 May 2013 (Amended Environmental Permit (No.: EP-445/2013/A) issued on 13 August 2014).
- 8. Billing Account for Disposal of Construction Waste (A/C No. 7024073)
- 9. Registration of Chemical Waste Producer (License: 5213-247-C4004-01).
- 10. Water Discharge License (License: WT00023634-2016).
- 11. Construction Noise Permit (Permit: GW-RE1092-16 and GW-RE 1251-16)

#### **Key Information in the Reporting Month**

12. Summary of key information in the reporting month is tabulated in Table II.

Table II Summary Table for Key Information in the Reporting Month

| Event                                                         | Event Details |        | Action Taken | Status | Remark |
|---------------------------------------------------------------|---------------|--------|--------------|--------|--------|
|                                                               | Number        | Nature |              |        |        |
| Complaint received                                            | 0             |        | N/A          | N/A    |        |
| Reporting<br>Changes                                          | 0             |        | N/A          | N/A    |        |
| Notifications of<br>any summons &<br>prosecutions<br>received | 0             |        | N/A          | N/A    |        |

#### **Future Key Issues**

- 13. The future key environmental issues in the coming month include:
  - Dust generation from stockpiles of dusty materials, exposed site area, excavation works and rock breaking activities;
  - Water spraying for dust generating activity and on haul road;
  - Proper storage of construction materials on site;
  - Storage of chemicals/fuel and chemical waste/waste oil on site;
  - Accumulation of general and construction waste on site;
  - Noise from operation of the equipment, especially for excavation activities and machinery on-site;
  - Wastewater and runoff discharge from site;
  - · Regular removal of silt, mud and sand along u-channels and sedimentation tanks; and
  - Review and implementation of temporary drainage system for the surface runoff.

#### 1. INTRODUCTION

#### Background

- 1.1 The Kai Tak Development (KTD) is located in the south-eastern part of Kowloon Peninsula, comprising the apron and runway areas of the former Kai Tak Airport and existing waterfront areas at To Kwa Wan, Ma Tau Kok, Kowloon Bay, Kwun Tong and Cha Kwo Ling. It covers a land area of about 328 hectares. Stage 2 Infrastructure Works for Developments for Southern Part of the Former Runway is one of the construction stages of KTD. It contains two Schedule 2 DPs including new distributor roads serving the planned KTD and KTD Roads D3A & D4A. The general layout of the Project is shown in Figure 1.
- 1.2 One Environmental Permits (EP) No.: EP-337/2009 was issued on 23 April 2009 for new distributor roads serving the planned KTD and one Environmental Permit No.: EP-445/2013 was issued on 3 May 2013 for Kai Tak Development Roads D3A & D4A to Civil Engineering and Development Department (CEDD) as the Permit Holder. Pursuant to Section 13 of the EIAO, the Director of Environmental Protection amended the Environmental Permit No.: EP-445/2013 based on the Application No. VEP-449/2014 and the Environmental Permit (No.: EP-445/2013/A) was issued on 13 August 2014.
- 1.3 A study of environmental impact assessment (EIA) was undertaken to consider the key issues of air quality, noise, water quality, waste, land contamination, cultural heritage and landscape and visual impact, and identify possible mitigation measures associated with the works. EIA Reports (Register No. AEIAR-130/2009 and AEIAR-170/2013) were approved by the Environmental Protection Department (EPD) on 4 March 2009 and 3 May 2013 respectively.
- 1.4 Cinotech Consultants Limited (Cinotech) was commissioned by Civil Engineering and Development Department (CEDD) to undertake the role of the Environmental Team (ET) for the Contract No. KL/2014/01 Stage 2 Infrastructure Works for Developments at the Southern Part of the Former Runway. The construction work under KL/2014/01 comprises the construction of part of the Road D4 under the EP (EP-337/2009) and the construction of Roads D3A & D4A under the EP (EP-445/2013/A).
- 1.5 Cinotech Consultants Limited was commissioned by Civil Engineering and Development Department (CEDD) to undertake the Environmental Monitoring and Audit (EM&A) works for the Project. The construction commencement of this Contract is on 13 April 2016. This is the 10<sup>th</sup> Monthly EM&A report summarizing the EM&A works for the Project from 1 31 January 2017.
- 1.6 All project information since the commencement of work under EPs including Monthly EM&A Reports is made available to the public via internet access at the website: <a href="http://www.kl201401.com/">http://www.kl201401.com/</a>

#### **Project Organizations**

- 1.7 Different parties with different levels of involvement in the project organization include:
  - Project Proponent Civil Engineering and Development Department (CEDD).
  - The Supervising Officer and the Supervising Officer's Representative (SO) AECOM Asia Co. Ltd. (AECOM).
  - Environmental Team (ET) Cinotech Consultants Limited (CCL).
  - Independent Environmental Checker (IEC) Ka Shing Management Consultant Ltd. (KSMC).
  - Contractor Continental Engineering Corp. and Chit Cheung Construction Co. Ltd. Joint Venture (CCJV).
- 1.8 The key contacts of the Project are shown in **Table 1.1**.

**Table 1.1 Key Project Contacts** 

| Party    | Role                                    | Contact Person     | Position                     | Phone No. | Fax No.   |  |
|----------|-----------------------------------------|--------------------|------------------------------|-----------|-----------|--|
| Project  |                                         | Mr. Ronald Siu     | Senior Engineer              | 2301 1453 | 2301 1277 |  |
| CEDD     | Proponent                               | Mr. Bernard Chan   | Engineer                     | 2301 1207 | 2301 1277 |  |
| AECOM    | Supervising<br>Officer                  | Mr. Clive Cheng    | CRE                          | 3746 1801 | 2798 0783 |  |
|          | Environmental                           | Dr. Priscilla Choy | Environmental<br>Team Leader | 2151 2089 | 2407 4200 |  |
| Cinotech | Team                                    | Ms. Ivy Tam        | Audit Team Leader            | 2151 2090 | 3107 1388 |  |
| KSMC     | Independent<br>Environmental<br>Checker | Dr. C. F. Ng       | IEC                          | 2618 2166 | 2120 7752 |  |
| CCJV     | Contractor                              | Mr. Dennis Ho      | Environmental<br>Officer     | 2960 1398 | 2960 1399 |  |

#### Construction Activities undertaken during the Reporting Month

- 1.9 The site activities undertaken in the reporting month included:
  - Watermain works;
  - Construction of boundary wall at EPD recycling centre;
  - Bored piles and Pre-bored socketed H-piles;
  - TTA implementation at Shing Fung Road and Wang Chiu Road / Sheung Yee Road;
  - Open excavation for box culvert, piles caps and underpass; and
  - ELS installation for box culvert and underpass.
- 1.10 The construction programme showing the inter-relationship with environmental protection/mitigation measures are presented in Table 1.2.

Table 1.2 Construction Programme Showing the Inter-Relationship with Environmental Protection/Mitigation Measures

| Construction<br>Works       | Major Environmental<br>Impact                          | Control Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-----------------------------|--------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| As mentioned in Section 1.8 | Noise, dust impact, water quality and waste generation | Sufficient watering of the works site with active dust emitting activities; Properly cover the stockpiles; On-site waste sorting and implementation of trip ticket system Appropriate desilting/sedimentation devices provided on site for treatment before discharge; Use of quiet plant and well-maintained construction plant; Well maintain the drainage system to prevent the spillage of wastewater during heavy rainfall; Provide mitigation measure to temporary use of chemicals; Provide sufficient mitigation measures as recommended in Approved EIA Report/Lease requirement. |

#### Summary of EM&A Requirements

- 1.11 The EM&A programme requires construction noise monitoring, air quality monitoring, landscape and visual monitoring and environmental site audit. The EM&A requirements for each parameter are described in the following sections, including:
- All monitoring parameters;
- Action and Limit levels for all environmental parameters;
- Event Action Plans;
- Environmental requirements and mitigation measures, as recommended in the EM&A Manual under the EP.
- 1.12 The advice on the implementation status of environmental protection and pollution control/mitigation measures is summarized in Section 5 of this report.

#### 2. AIR QUALITY

#### **Monitoring Requirements**

2.1 With reference to the same principle of EIA report of the Project, no air quality monitoring station within 500m from the boundary of this Project are considered as relevant monitoring locations. No air quality monitoring is required for the Project.

#### **Observations**

- 2.2 No monitoring for air quality is required for the Project.
- 2.3 Site audits were carried out on a weekly basis to monitor and audit the timely implementation of air quality mitigation measures within the site boundaries of this Project. The summaries of site audits are attached in **Appendix C.**

#### 3. NOISE

#### **Monitoring Requirements**

3.1 With reference to the same principle of EIA report of the Project, no construction noise monitoring station within 300m from the boundary of this Project are considered as relevant monitoring locations. No Construction noise monitoring is required for the Project. Appendix A shows the established Action and Limit Levels for the environmental monitoring works.

#### Observations

- 3.2 No monitoring for air quality is required for the Project. No Action/Limit Level exceedance was recorded. The summary of exceedance record in reporting month is shown in **Appendix B**.
- 3.3 Site audits were carried out on a weekly basis to monitor and audit the timely implementation of construction noise mitigation measures within the site boundaries of this Project. The summaries of site audits are attached in **Appendix C**.

#### 4. LANDSCAPE AND VISUAL

#### **Monitoring Requirements**

4.1 According to EM&A Manual of the Kai Tak Development EIA Study, ET shall monitor and audit the contractor's operation during the construction period on a weekly basis, and to report on the contractor's compliance.

#### **Results and Observations**

- 4.2 Site audits were carried out on a weekly basis to monitor and audit the timely implementation of landscape and visual mitigation measures within the site boundaries of this Project. The summaries of site audits are attached in **Appendix C**.
- 4.3 No non-compliance of the landscape and visual impact was recorded in the reporting month.
- 4.4 Should non-compliance of the landscape and visual impact occur, action in accordance with the action plan presented in **Appendix D** shall be performed.

#### 5. ENVIRONMENTAL AUDIT

#### Site Audits

- 5.1 Site audits were carried out on a weekly basis to monitor the timely implementation of proper environmental management practices and mitigation measures in the Project site. The summaries of site audits are attached in **Appendix C**.
- 5.2 Site audits were conducted by representatives of the Contractor, Supervising Officer and ET on 4, 11, 18, 25 January 2017 in the reporting month. IEC joint site inspection was conducted on 25 January 2017. No non-compliance was observed during the site audits.

#### Status of Environmental Licensing and Permitting

5.3 All permits/licenses obtained for the Project are summarized in Table 5.1.

Table 5.1 Summary of Environmental Licensing and Permit Status

| Damit Na                    | Valid Period  |          | Details                                                                                                                                                                        | Ct. 4  |
|-----------------------------|---------------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| Permit No.                  | From          | To       | Details                                                                                                                                                                        | Status |
| <b>Environmental Per</b>    | mit (EP)      |          |                                                                                                                                                                                |        |
| EP-337/2009                 | 23/04/09      | N/A      | Construction of new distributor roads serving the planned Kai Tak development.                                                                                                 | Valid  |
| EP-445/2013/A               | 13/08/14      | N/A      | Construction of Kai Tak Development roads D3A and D4A                                                                                                                          | Valid  |
| Effluent Discharge L        | icense        |          |                                                                                                                                                                                |        |
| WT00023634-2016             |               | 31/03/21 | Wastewater from the construction site including effluent treated by screen and sedimentation tank                                                                              | Valid  |
| Registration of Chen        | nical Waste F | roducer  |                                                                                                                                                                                |        |
| 5213-247-C4004-01           |               | N/A      | Chemical Waste Types: Surplus paint, waste contaminated by paint, diesel, waste contaminated by diesel, spent lubricating oil and waste, soil contaminated by lubricating oil. | Valid  |
| <b>Construction Noise P</b> | Permit (CNP)  |          |                                                                                                                                                                                |        |
| GW-RE1092-16                | 09/11/16      | 08/05/17 | powered mechanical equipment for                                                                                                                                               |        |
| GW-RE1251-16                | 10/01/17      | 08/07/17 |                                                                                                                                                                                |        |

#### **Status of Waste Management**

- 5.4 The amount of wastes generated by the major site activities of this Project during the reporting month is shown in **Appendix G**.
- 5.5 In respect of the dump truck cover, the Contractor is reminded to take record photos and inspection to ensure that all dump trucks have fully covered the skip before leaving the site.

#### **Implementation Status of Environmental Mitigation Measures**

5.6 During site inspections in the reporting month, no non-conformance was identified. ET weekly site inspections were carried out during the reporting month and the observations and recommendations are summarized in Table 5.2.

Table 5.2 Observations and Recommendations of Site Inspections

| Parameters                       | Date        | Observations and Recommendations                                                                                                        | Follow-up                                                                  |
|----------------------------------|-------------|-----------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|
| Water Quality                    | 25 Jan 2017 | Appropriate signage should be provided at wheel washing machine to remind all drivers to perform wheel washing before leaving the Site. | Follow up actions will be reported in the next month.                      |
|                                  | 28 Dec 2016 | Bagged cement should be properly covered in Section 2 for dust suppression.                                                             | Rectification/improvement was observed during the follow-up audit session. |
|                                  | 04 Jan 2017 | Stockpiles in Section 1 should be covered with impervious materials to prevent dust generation.                                         | Rectification/improvement was observed during the follow-up audit session. |
| Air Quality                      | 04 Jan 2017 | Water spraying on haul roads should be provided more frequently in Section 1 for dust suppression.                                      | Rectification/improvement was observed during the follow-up audit session. |
|                                  | 11 Jan 2017 | Tarpaulin coverage should be provided to stockpiles in Section 2 to prevent dust generation.                                            | Rectification/improvement was observed during the follow-up audit session. |
| Noise                            |             |                                                                                                                                         |                                                                            |
| Waste/<br>Chemical<br>Management |             |                                                                                                                                         |                                                                            |
| Landscape<br>and Visual          |             |                                                                                                                                         |                                                                            |
| Permits/<br>Licences             |             |                                                                                                                                         |                                                                            |

#### **Summary of Mitigation Measures Implemented**

5.7 An updated summary of the EMIS is provided in **Appendix E**.

#### **Implementation Status of Event Action Plans**

5.8 The Event Action Plans for noise and landscape and visual are presented in **Appendix D**. No Event Action Plan for air quality is considered necessary.

#### Construction Noise

5.9 No Action/Limit Level exceedance was recorded in the reporting month.

#### Landscape and visual

5.10 No non-compliance was recorded in the reporting month.

# Summary of Complaint, Warning, Notification of any Summons and Successful Prosecution

5.11 The summaries of environmental complaint, warning, summon and notification of successful prosecution for the Project is presented in **Appendix F**.

#### 6. FUTURE KEY ISSUES

- 6.1 Major site activities undertaken for the coming two months include:
  - Watermain works:
  - Construction of boundary wall at EPD recycling centre;
  - Bored piles and Pre-bored socketed H-piles;
  - TTA implementation at Shing Fung Road and Wang Chiu Road/ Sheung Yee Road;
  - Open excavation for box culvert, pile caps and underpass;
  - ELS installation for box culvert and underpass; and
  - Construction of noise barrier foundation

#### **Key Issues for the Coming Month**

- 6.2 Key environmental issues in the coming month include:
  - · Wastewater and runoff discharge from site;
  - Regular removal of silt, mud and sand along u-channels and sedimentation tanks;
  - Review and implementation of temporary drainage system for the surface runoff;
  - Noise from operation of the equipment, especially for rock-breaking activities, piling works and machinery on-site;
  - Dust generation from stockpiles of dusty materials, exposed site area, excavation works and rock breaking activities;
  - Water spraying for dust generating activity and on haul road;
  - · Proper storage of construction materials on site;
  - Storage of chemicals/fuel and chemical waste/waste oil on site;
  - Accumulation of general and construction waste on site.
- 6.3 The tentative program of major site activities and the impact prediction and control measures for the coming two months, i.e. February and March 2017 are summarized as follows:

| <b>Construction Works</b>   | Major Impact<br>Prediction                   | Control Measures                                                                                                                                                                                                                                                                                                     |
|-----------------------------|----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                             | Air quality impact (dust)                    | <ul> <li>a) Frequent watering of haul road and unpaved/exposed areas;</li> <li>b) Frequent watering or covering stockpiles with tarpaulin or similar means; and</li> <li>c) Watering of any earth moving activities.</li> </ul>                                                                                      |
| As mentioned in Section 7.1 | Water quality<br>impact (surface<br>run-off) | d) Diversion of the collected effluent to de-silting facilities for treatment prior to discharge to public storm water drains; e) Provision of adequate de-silting facilities for treating surface run-off and other collected effluents prior to discharge; f) Provision of perimeter protection such as sealing of |
|                             |                                              | hoarding footings to avoid run-off from entering the existing storm water drainage system via public road; and g) Provision of measures to prevent discharge into the stream.                                                                                                                                        |

| Construction Works | Major Impact | Control Measures                                               |  |
|--------------------|--------------|----------------------------------------------------------------|--|
|                    | Prediction   |                                                                |  |
|                    | Noise Impact | h) Scheduling of noisy construction activities if necessary to |  |
|                    |              | avoid persistent noisy operation;                              |  |
|                    |              | i) Controlling the number of plants use on site;               |  |
|                    |              | j) Regular maintenance of machines; and                        |  |
|                    |              | k) Use of acoustic barriers if necessary.                      |  |

#### 7. CONCLUSIONS AND RECOMMENDATIONS

#### Conclusions

7.1 The Environmental Monitoring and Audit (EM&A) Report presents the EM&A works undertaken during the period from 1 to 31 January 2017.

#### Air Quality and Construction Noise

7.2 No regular monitoring air quality and noise monitoring is required for the Project. No Action/Limit Level exceedance was recorded.

#### Landscape and visual

7.3 No non-compliance was recorded in the reporting month.

#### Complaint and Prosecution

- 7.4 No environmental complaints and environmental prosecution were received in the reporting month.
- 7.5 The ET will keep track on the EM&A programme to ensure compliance of environmental requirements and the proper implementation of all necessary mitigation measures.

#### Recommendations

7.6 According to the environmental audit performed in the reporting month, the following recommendations were made:


#### Air Quality Impact

- To maintain good site practices including covering stockpiles of dusty materials with impervious sheets in order to prevent dust generation.
- To properly cover bagged cement with impervious materials for dust suppression.

#### Water Quality Impact

 To enhance signage for reminding drivers of all types of vehicles to perform wheel washing before leaving the Site.

#### **FIGURES**

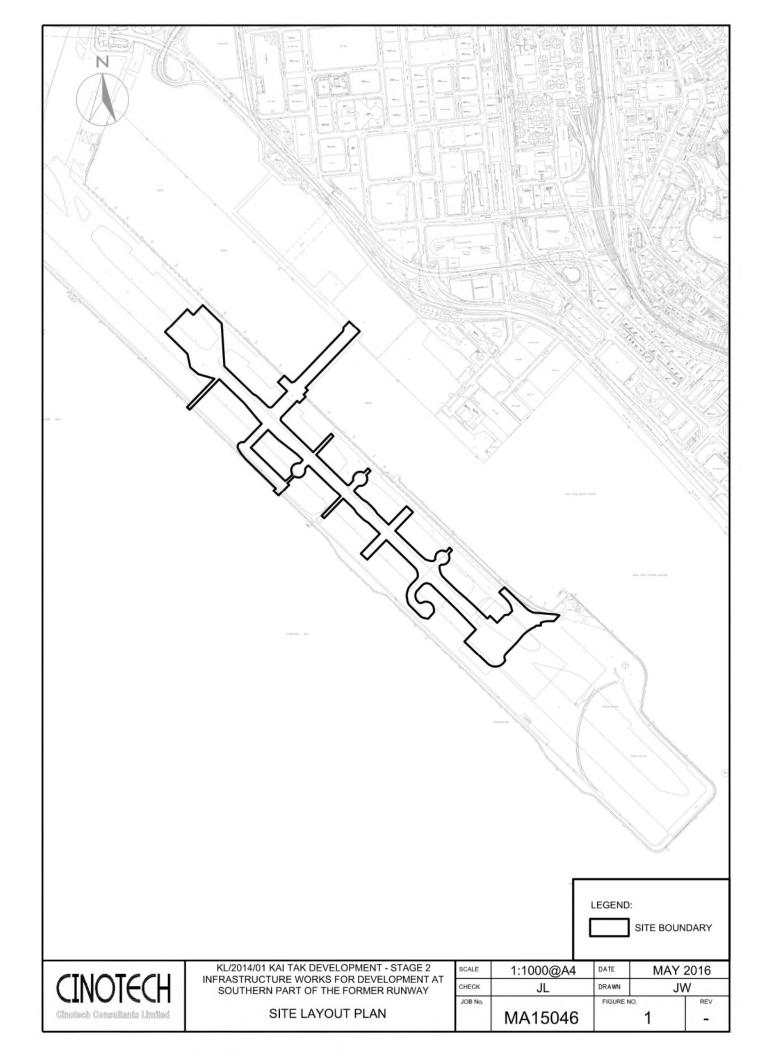

# APPENDIX A ACTION AND LIMIT LEVELS

#### Appendix A - Action and Limit Levels

Table A-1 Action and Limit Levels for Construction Noise

| Time Period                      | Action Level                              | Limit Level <sup>(1)(2)</sup> |
|----------------------------------|-------------------------------------------|-------------------------------|
| 0700-1900 hrs on normal weekdays | When one documented complaint is received | 75 dB(A)<br>70dB(A)/65dB(A)*  |

Remarks: (1) If works are to be carried out during restricted hours, the conditions stipulated in the Construction Noise Permit (CNP) issued by the Noise Control Authority have to be followed.

- (2) No regular noise impact monitoring station for this Contract. It is subject to the noise sensitive receiver(s) and additional monitoring work.
- (\*) 70dB(A) and 65dB(A) for schools during normal teaching periods and school examination periods, respectively.

#### APPENDIX B SUMMARY OF EXCEEDANCE

#### Contract No. KL/2014/01 Kai Tak Development –Stage 2 Infrastructure Works for Developments at the Southern Part of the Former Runway

#### Appendix B - Summary of Exceedance

Exceedance Record for Contract No. KL/2014/01

Reporting Month: January 2017

(A) Exceedance Record for Construction Noise

(NIL in the reporting month)

(B) Exceedance Record for Landscape and Visual

(NIL in the reporting month)

#### APPENDIX C SITE AUDIT SUMMARY

#### Contract No. KL/2014/01 Kai Tak Development - Stage 2 Infrastructure Works for Developments at the Southern Part of the Former Runway EP-337/2009 & EP-445/2013/A

# Weekly Site Inspection Record Summary Inspection Information

| Checklist Reference Number | 170104                     |  |
|----------------------------|----------------------------|--|
| Date                       | 4 January 2017 (Wednesday) |  |
| Time                       | 14:00 - 16:00              |  |

| Ref. No.   | Non-Compliance                                                                                                                                    | Related<br>Item No. |
|------------|---------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| -          | None identified                                                                                                                                   | -                   |
| Ref. No.   | Remarks/Observations                                                                                                                              | Related<br>Item No. |
|            | B. Water Quality                                                                                                                                  |                     |
|            | No environmental deficiency was identified during site inspection.                                                                                |                     |
|            | C. Air Quality                                                                                                                                    |                     |
| 170104-R01 | Stockpiles in Section 1 should be covered with impervious materials to prevent dust generation.                                                   | C 7                 |
| 170104-R02 | Water spraying on haul roads should be provided more frequently in Section 1 for dust suppression.                                                | C 5                 |
|            | D. Noise                                                                                                                                          |                     |
|            | No environmental deficiency was identified during site inspection.                                                                                |                     |
|            | E. Waste / Chemical Management                                                                                                                    |                     |
|            | No environmental deficiency was identified during site inspection.                                                                                |                     |
|            | F. Visual and Landscape                                                                                                                           |                     |
|            | No environmental deficiency was identified during site inspection.                                                                                |                     |
|            | G. Permits /Licences                                                                                                                              |                     |
|            | No environmental deficiency was identified during site inspection.                                                                                |                     |
|            | H. Others                                                                                                                                         |                     |
|            | Follow-up on previous audit session (Ref. No.:161228), all identified environmental deficiency was observed improved/rectified by the Contractor. |                     |

|             | Name               | Signature | Date           |
|-------------|--------------------|-----------|----------------|
| Recorded by | Kelvin Koo         | 1         | 4 January 2017 |
| Checked by  | Dr. Priscilla Choy | WI        | 4 January 2017 |

#### Contract No. KL/2014/01 Kai Tak Development - Stage 2 Infrastructure Works for Developments at the Southern Part of the Former Runway EP-337/2009 & EP-445/2013/A

#### Weekly Site Inspection Record Summary Inspection Information

| Checklist Reference Number | 170111                      |
|----------------------------|-----------------------------|
| Date                       | 11 January 2017 (Wednesday) |
| Time                       | 14:00 – 16:00               |

| Ref. No.   | Non-Compliance                                                                                                                                    | Related<br>Item No. |
|------------|---------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| ACI. 110.  | None identified                                                                                                                                   | Atem 140.           |
| Ref. No.   | Remarks/Observations                                                                                                                              | Related<br>Item No. |
|            | B. Water Quality                                                                                                                                  |                     |
|            | No environmental deficiency was identified during site inspection.                                                                                |                     |
|            | C. Air Quality                                                                                                                                    |                     |
| 170111-R01 | Tarpaulin coverage should be provided to stockpiles in Section 2 to prevent dust generation.                                                      | C 7                 |
|            | D. Noise                                                                                                                                          |                     |
|            | No environmental deficiency was identified during site inspection.                                                                                |                     |
|            | E. Waste / Chemical Management                                                                                                                    |                     |
|            | No environmental deficiency was identified during site inspection.                                                                                |                     |
|            | F. Visual and Landscape                                                                                                                           |                     |
|            | No environmental deficiency was identified during site inspection.                                                                                |                     |
|            | G. Permits /Licences                                                                                                                              |                     |
|            | No environmental deficiency was identified during site inspection.                                                                                |                     |
|            | H. Others                                                                                                                                         |                     |
|            | Follow-up on previous audit session (Ref. No.:170104), all identified environmental deficiency was observed improved/rectified by the Contractor. |                     |

|             | Name               | Signature | Date            |
|-------------|--------------------|-----------|-----------------|
| Recorded by | Kelvin Koo         | 1         | 11 January 2017 |
| Checked by  | Dr. Priscilla Choy | NI        | 11 January 2017 |

# Contract No. KL/2014/01 Kai Tak Development - Stage 2 Infrastructure Works for Developments at the Southern Part of the Former Runway EP-337/2009 & EP-445/2013/A

# Weekly Site Inspection Record Summary Inspection Information

| Checklist Reference Number | 170118                      |
|----------------------------|-----------------------------|
| Date                       | 18 January 2017 (Wednesday) |
| Time                       | 14:00 – 16:00               |

| Ref. No. | Non-Compliance                                                                                                                                                            | Related<br>Item No. |
|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| _        | None identified                                                                                                                                                           |                     |
| Ref. No. | Remarks/Observations                                                                                                                                                      | Related<br>Item No. |
|          | B. Water Quality                                                                                                                                                          |                     |
|          | No environmental deficiency was identified during site inspection.                                                                                                        |                     |
|          | C. Air Quality                                                                                                                                                            |                     |
|          | No environmental deficiency was identified during site inspection.                                                                                                        |                     |
|          | D. Noise                                                                                                                                                                  |                     |
|          | No environmental deficiency was identified during site inspection.                                                                                                        |                     |
|          | E. Waste / Chemical Management                                                                                                                                            |                     |
|          | No environmental deficiency was identified during site inspection.                                                                                                        |                     |
|          | F. Visual and Landscape                                                                                                                                                   |                     |
|          | No environmental deficiency was identified during site inspection.                                                                                                        |                     |
|          | G, Permits /Licences                                                                                                                                                      |                     |
|          | No environmental deficiency was identified during site inspection.                                                                                                        |                     |
|          | H. Others                                                                                                                                                                 |                     |
|          | <ul> <li>Follow-up on previous audit session (Ref. No.:170111), all identified environmental<br/>deficiency was observed improved/rectified by the Contractor.</li> </ul> |                     |

|             | Name               | Signature                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Date            |
|-------------|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| Recorded by | Kelvin Koo         | and the same of th | 18 January 2017 |
| Checked by  | Dr. Priscilla Choy | W.I.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 18 January 2017 |

# Contract No. KL/2014/01 Kai Tak Development - Stage 2 Infrastructure Works for Developments at the Southern Part of the Former Runway EP-337/2009 & EP-445/2013/A

# Weekly Site Inspection Record Summary Inspection Information

| Checklist Reference Number | 170125                      |
|----------------------------|-----------------------------|
| Date                       | 25 January 2017 (Wednesday) |
| Time                       | 14:30-17:00                 |

| Ref. No.   | Non-Compliance                                                                                                                          | Related<br>Item No. |
|------------|-----------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| -          | None identified                                                                                                                         | -                   |
| Ref. No.   | Remarks/Observations                                                                                                                    | Related<br>Item No. |
|            | B. Water Quality                                                                                                                        |                     |
|            | No environmental deficiency was identified during site inspection.                                                                      |                     |
|            | C. Air Quality                                                                                                                          |                     |
| 170125-R01 | Appropriate signage should be provided at wheel washing machine to remind all drivers to perform wheel washing before leaving the Site. | C 8                 |
|            | D. Noise                                                                                                                                |                     |
|            | No environmental deficiency was identified during site inspection.                                                                      |                     |
|            | E. Waste / Chemical Management                                                                                                          |                     |
|            | No environmental deficiency was identified during site inspection.                                                                      |                     |
|            | F. Visual and Landscape                                                                                                                 |                     |
|            | No environmental deficiency was identified during site inspection.                                                                      |                     |
|            | G. Permits /Licences                                                                                                                    | *                   |
|            | No environmental deficiency was identified during site inspection.                                                                      |                     |
|            | H. Others                                                                                                                               |                     |
|            | Follow-up on previous audit session (Ref. No.:170118), no major environmental deficiency was identified during site inspection.         |                     |

|             | Name               | Signature | Date            |
|-------------|--------------------|-----------|-----------------|
| Recorded by | Kelvin Koo         | K         | 25 January 2017 |
| Checked by  | Dr. Priscilla Choy | WI        | 25 January 2017 |

#### APPENDIX D EVENT ACTION PLANS

# Appendix D - Event Action Plans

Event/Action Plan for Construction Noise

| EVENT                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | ACTION                                                                                                                                                                                                                                                                                                                   | NC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                   | Ħ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | IEC                                                                                                                                                                                                                                                                                                                      | ER                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | CONTRACTOR                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Action Level<br>being<br>exceeded | 4. Notify ER, IEC and Contractor, 5. Carry out investigation. 6. Report the results of investigation to the IEC, ER and Contractor, 7. Discuss with the IEC and Contractor on remedial measures required; 8. Increase monitoring frequency to check mitigation effectiveness. (The above actions should be taken within 2 working days after the exceedance is identified)                                                                                                                                                                                                         | 1. Review the investigation results submitted by the ET. 2. Review the proposed remedial measures by the Contractor and advise the ER accordingly. 3. Advise the ER on the effectiveness of the proposed remedial measures. (The above actions should be taken within 2 working days after the exceedance is identified) | 1. Confirm receipt of notification of failure in writing: 2. Notify Contractor: 3. In consolidation with the IEC, agree with the Contractor on the remedial measures to be implemented; 4. Supervise the Implementation of remedial measures.  (The above actions should be taken within 2 working days after the exceedance is identified)                                                                                                                                                                      | Submit noise mitigation proposals to IEC and ER,     Implement noise mitigation proposals.  (The above actions should be taken within 2 working days after the exceedance is identified)                                                                                                                                                                                                                                                          |
| Limit Level<br>being<br>exceeded  | 1. Inform IEC, ER, Contractor and EPD; 2. Repeat measurements to confirm findings; 3. Increase monitoring frequency; 4. Identify source and investigate the cause of exceedance; 5. Carry out analysis of Contractor's working procedures; 6. Discuss with the IEC, Contractor and ER on remedial measures required; 7. Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results; 8. If exceedance stops, cease additional monitoring.  (The above actions should be taken within 2 working days after the exceedance is identified) | Discuss amongst ER, ET, and Contractor on the potential remedial actions;     Review Contractor's remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly.  (The above actions should be taken within 2 working days after the exceedance is identified)                         | 1. Confirm receipt of notification of fallure in writing: 2. Notify Contractor; 3. In consolidation with the IEC, agree with the Contractor on the remedial measures to be implemented; 4. Supervise the implementation of remedial measures; 5. If exceedance continues, consider stopping the Contractor to continue working on that portion of work which causes the exceedance until the exceedance is abated.  (The above actions should be taken within 2 working days after the exceedance is identified) | 1. Take immediate action to avoid further exceedance; 2. Submit proposals for remedial actions to IEC and ER within 3 working days of notification; 3. Implement the agreed proposals; 4. Submit further proposal if problem still not under control; 5. Stop the relevant portion of works as instructed by the ER until the exceedance is abated.  (The above actions should be taken within 2 working days after the exceedance is identified) |

## **Appendix D - Event Action Plans**

### Event/Action Plan for Landscape and Visual

| EVENT                                    |                                                                                                                                                                                                                                                                                                                                    | ACT                                                                                                                                                                                                                             | TION                                                                                        |                                                                                  |
|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
| LEVEL                                    | ET                                                                                                                                                                                                                                                                                                                                 | IEC                                                                                                                                                                                                                             | ER                                                                                          | CONTRACTOR                                                                       |
| Design<br>Check                          | Check final design conforms to the requirements of EP and prepare report.                                                                                                                                                                                                                                                          | Check report.     Recommend remedial design if necessary                                                                                                                                                                        | Undertake<br>remedial<br>design if<br>necessary                                             |                                                                                  |
| Non-<br>conformity<br>on one<br>occasion | Identify     Source     Inform IEC     and ER     Discuss     remedial     actions with     IEC, ER and     Contractor     Monitor     remedial     actions until     rectification     has been     completed                                                                                                                     | Check report Check Contractor's working method Discuss with ET and Contractor on possible remedial measures Advise ER on effectiveness of proposed remedial measures. Check implementatio n of remedial measures.               | Notify     Contractor     Ensure     remedial     measures are     properly     implemented | Amend working methods     Rectify damage and undertake any necessary replacement |
| Repeated<br>Non-<br>conformity           | Identify     Source     Inform IEC     and ER     Increase     monitoring     frequency     Discuss     remedial     actions with     IEC, ER and     Contractor     Monitor     remedial     actions until     rectification     has been     completed     If non-     conformity     stops, cease     additional     monitoring | Check monitoring report Check Contractor's working method Discuss with ET and Contractor on possible remedial measures Advise ER on effectiveness of proposed remedial measures Supervise implementatio n of remedial measures. | Notify     Contractor     Ensure     remedial     measures are     properly     implemented | Amend working methods     Rectify damage and undertake any necessary replacement |

APPENDIX E ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE (EMIS)

Appendix E - Summary of Implementation Schedule of Mitigation Measures for Construction Phase

| Status              |                          | <                                                                             | <                                                                                                  |                                                                                                                                                                                                                                                                                     | <                                                                                                                                                                                     | <                                                                                                                  | <                                                                                                                     | <                                                                                                                                                                           | <                                                                                                                                                                                              | <                                                                                                                                                                                                                                                             | <                                                                                              |
|---------------------|--------------------------|-------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|
| Mitigation Measures | uality                   | 8 times daily watering of the work site with active dust emitting activities. | Control measures stipulated in the approved KTD Schedule 3 EIA Report should be strictly followed. | Implementation of dust suppression measures stipulated in Air Pollution Control (Construction Dust) Regulation. The following mitigation measures, good site practices and a comprehensive dust monitoring and audit programme are recommended to minimize cumulative dust impacts. | <ul> <li>Stockpiling site(s) should be lined with impermeable sheeting and bunded. Stockpiles<br/>should be fully covered by impermeable sheeting to reduce dust emission.</li> </ul> | <ul> <li>Misting for the dusty material should be carried out before being loaded into the<br/>vehicle.</li> </ul> | <ul> <li>Any vehicle with an open load carrying area should have properly fitted side and tail<br/>boards.</li> </ul> | Material having the potential to create dust should not be loaded from a level higher than the side and tail boards and should be dampened and covered by a clean tarnaulin | The tarpaulin should be properly secured and should extent at least 300 mm over the edges of the sides and tailboards. The material should also be dampened if necessary before transportation | <ul> <li>The vehicles should be restricted to maximum speed of 10 km per hour and confined<br/>haulage and delivery vehicle to designated roadways insider the site. Onsite unpaved<br/>roads should be compacted and kept free of lose materials.</li> </ul> | <ul> <li>Vehicle washing facilities should be provided at every vehicle exit point.</li> </ul> |
| EIA Ref.            | Construction Air Quality | S3.2<br>(AEIAR-130/2009)                                                      | S4.8<br>(AEIAR-170/2013)                                                                           | S3.2<br>(AEIAR-130/2009)<br>and<br>S4.8                                                                                                                                                                                                                                             | (AEIAR-170/2013)                                                                                                                                                                      |                                                                                                                    |                                                                                                                       |                                                                                                                                                                             |                                                                                                                                                                                                |                                                                                                                                                                                                                                                               |                                                                                                |

| EIA Ref.                 | Mitigation Measures                                                                                                                                                                                                                                         | Status |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
|                          | d the exit point should be paved with concrete, bituminous s.                                                                                                                                                                                               | < <    |
|                          | <ul> <li>Sprayed with water so as to maintain the entire road surface wer.</li> <li>Every stock of more than 20 bags of cement should be covered entirely by impervious sheeting placed in an area sheltered on the top and the three sides; and</li> </ul> | *      |
|                          | <ul> <li>Every vehicle should be washed to remove any dusty materials from its body and<br/>wheels before leaving the construction sites.</li> </ul>                                                                                                        | *      |
| Construction Noise       |                                                                                                                                                                                                                                                             |        |
| S3.3<br>(AEIAR-130/2009) | Use of quiet PME, movable barriers barrier for Asphalt Paver, Breaker, Excavator and Hand-held breaker and full enclosure for Air Compressor, Bar Bender, Concrete Pump, Generator and Water Pump.                                                          | <      |
| S3.3<br>(AEIAR-130/2009) | Good Site Practice:                                                                                                                                                                                                                                         |        |
| ,                        | <ul> <li>Only well-maintained plant should be operated on-site and plant should be serviced<br/>regularly during the construction program.</li> </ul>                                                                                                       | <      |
|                          | <ul> <li>Silencers or mufflers on construction equipment should be utilized and should be properly maintained during the construction program.</li> </ul>                                                                                                   | N/A(1) |
|                          | NSRs as possible.                                                                                                                                                                                                                                           | <      |
|                          | <ul> <li>Machines and plant (such as trucks) that may be in intermittent use should be shut<br/>down between works periods or should be throttled down to a minimum.</li> </ul>                                                                             | <      |
|                          | <ul> <li>Plant known to emit noise strongly in one direction should, wherever possible, be<br/>orientated so that the noise is directed away from the nearby NSRs.</li> </ul>                                                                               | <      |
|                          | ed, wherever                                                                                                                                                                                                                                                | <      |

| EIA Ref.                   | Mitigation Measures                                                                                                                                                                                                                                | Status            |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|
|                            | practicable, in screening noise from on-site construction activities.                                                                                                                                                                              |                   |
| S3.3<br>(AEIAR-130/2009)   | Scheduling of Construction Works during School Examination Period                                                                                                                                                                                  | N/A               |
| S3.8<br>(AEIAR-170/2013)   | Provision of a landscaped deck along Roads D3A & D4A.                                                                                                                                                                                              | N/A               |
| S3.8<br>(AEIAR-170/2013)   | <ul> <li>Provision of about 1090 m length of vertical noise barrier (connected to the deck) at Roads D3A &amp; D4A;</li> <li>Provision of about 60 m length of overhang vertical noise barrier (connected to the deck) at Road D4A; and</li> </ul> | N/A<br>N/A<br>N/A |
|                            | <ul> <li>Provision of staircases with noise barriers next to Sites 4A1 and 4B1</li> <li>It should be noted that the exact length of the mitigation measures would be subject to minor refinement during the detailed design stage.</li> </ul>      |                   |
| S3.8<br>(AEIAR-170/2013)   | Non-noise sensitive use areas within Sites 4A1 and 4B1.                                                                                                                                                                                            | N/A               |
| S3.8<br>(AEIAR-170/2013)   | Avoid sensitive façade with openable window facing Road D3A.                                                                                                                                                                                       | N/A               |
| Construction Water Quality | Quality                                                                                                                                                                                                                                            |                   |
| S3.4<br>(AEIAR-130/2009)   | Construction Runoff                                                                                                                                                                                                                                |                   |
| and S5.8                   | Exposed soil areas should be minimised to reduce the potential for increased siltation, contamination of runoff, and erosion. Construction runoff related impacts associated with                                                                  |                   |
| (AEIAK-1/0/2013)           | the above ground construction activities can be readily controlled through the use of appropriate mitigation measures which include:  • use of sediment traps  • adequate maintenance of drainage systems to prevent flooding and overflow         | < <               |
|                            |                                                                                                                                                                                                                                                    |                   |

| Status              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                      |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mitigation Measures | Construction site should be provided with adequately designed perimeter channel and pretreatment facilities and proper maintenance. The boundaries of critical areas of earthworks should be marked and surrounded by dykes or embankments for flood protection. Temporary ditches should be provided to facilitate runoff discharge into the appropriate watercourses, via a silt retention pond. Permanent drainage channels should incorporate sediment basins or traps and baffles to enhance deposition rates. The design of efficient silt removal facilities should be based on the guidelines in Appendix A1 of ProPECC PN 1/94. | Ideally, construction works should be programmed to minimise surface excavation works during the rainy season (April to September). All exposed earth areas should be completed as soon as possible after earthworks have been completed, or alternatively, within 14 days of the cessation of earthworks where practicable. If excavation of soil cannot be avoided during the rainy season, or at any time of year when rainstorms are likely, exposed slope surfaces should be covered by tarpaulin or other means. | Earthworks final surfaces should be well compacted and the subsequent permanent work or surface protection should be carried out immediately after the final surfaces are formed to prevent erosion caused by rainstorms. Appropriate drainage like intercepting channels should be provided where necessary. | Measures should be taken to minimize the ingress of rainwater into trenches. If excavation of trenches in wet seasons is necessary, they should be dug and backfilled in short sections. Rainwater pumped out from trenches or foundation excavations should be discharged into storm drains via silt removal facilities. | Sediment tanks of sufficient capacity, constructed from pre-formed individual cells of approximately 6 to 8 m <sup>3</sup> capacity, are recommended as a general mitigation measure |
| EIA Ref.            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | S5.8<br>(AEIAR-170/2013)                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                           | S3.4<br>(AEIAR-130/2009)                                                                                                                                                             |

| EIA Ref.                 | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Status |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
|                          | from, the wheel-wash bay to the public road should be paved with sufficient backfall toward the wheel-wash bay to prevent vehicle tracking of soil and silty water to public roads and drains.                                                                                                                                                                                                                                                                                                                               |        |
| S5.8<br>(AEIAR-170/2013) | Boring and Drilling Water  Water used in ground boring and drilling for site investigation or rock / soil anchoring  should as far as practicable be re-circulated after sedimentation. When there is a need for final disposal, the wastewater should be discharged into storm drains via silt removal facilities.                                                                                                                                                                                                          |        |
|                          | Acidic Wastewater Acidic wastewater Acidic wastewater generated from acid cleaning, etching, pickling and similar activities should be neutralized to within the pH range of 6 to 10 before discharging into foul sewers                                                                                                                                                                                                                                                                                                     |        |
| S3.4<br>(AEIAR-130/2009) | Drainage  It is recommended that on-site drainage system should be installed prior to the commencement of other construction activities. Sediment traps should be installed in order to minimise the sediment loading of the effluent prior to discharge into foul sewers. There should be no direct discharge of effluent from the site into the sea.                                                                                                                                                                       |        |
| S3.4<br>(AEIAR-130/2009) | All temporary and permanent drainage pipes and culverts provided to facilitate runoff discharge should be adequately designed for the controlled release of storm flows. All sediment control measures should be regularly inspected and maintained to ensure proper and efficient operation at all times and particularly following rain storms. The temporarily diverted drainage should be reinstated to its original condition when the construction work has finished or the temporary diversion is no longer required. |        |

| EIA Ref.                                                    | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Status |
|-------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| S3.4<br>(AEIAR-130/2009)                                    | All fuel tanks and storage areas should be provided with locks and be located on sealed areas, within bunds of a capacity equal to 110% of the storage capacity of the largest tank, to prevent spilled fuel oils from reaching the coastal waters of the Victoria Harbour WCZ.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |        |
| S5.8<br>(AEIAR-170/2013)                                    | There is a need to apply to EPD for a discharge licence for discharge of effluent from the construction site under the WPCO. The discharge quality must meet the requirements specified in the discharge licence. All the runoff and wastewater generated from the works areas should be treated so that it satisfies all the standards listed in the TM-DSS. Minimum distance of 100 m should be maintained between the discharge points of construction site effluent and the existing seawater intakes and the planned WSR mentioned in S5.3.1 as appropriate. The beneficial uses of the treated effluent for other on-site activities such as dust suppression, wheel washing and general cleaning etc., can minimise water consumption and reduce the effluent discharge volume. If monitoring of the treated effluent quality from the works areas is required during the construction phase of the Project, the monitoring should be carried out in accordance with the relevant WPCO licence which is under the ambit of regional office (RO) of EPD. |        |
| S3.4<br>(AEIAR-130/2009)<br>and<br>S5.8<br>(AEIAR-170/2013) | Sewage Effluent  Construction work force sewage discharges on site are expected to be connected to the existing trunk sewer or sewage treatment facilities. The construction sewage may need to be handled by portable chemical toilets prior to the commission of the on-site sewer system. Appropriate numbers of portable toilets should be provided by a licensed contractor to serve the large number of construction workers over the construction site.  The Contractor should also be responsible for waste disposal and maintenance practices.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |        |
| S5.8                                                        | Notices should be posted at conspicuous locations to remind the workers not to discharge                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |        |

| EIA Ref.                                                    | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Status |
|-------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| (AEIAR-170/2013)                                            | any sewage or wastewater into the surrounding environment. Regular environmental audit of the construction site will provide an effective control of any malpractices and can encourage continual improvement of environmental performance on site. It is anticipated that sewage generation during the construction phase of the project would not cause water pollution problem after undertaking all required measures.                                                                                                                                                                                                                                                                                |        |
| S3.4<br>(AEIAR-130/2009)<br>and<br>S5.8<br>(AEIAR-170/2013) | Stormwater Discharges  Minimum distances of 100 m should be maintained between the existing or planned stormwater discharges and the existing or planned seawater intakes.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <      |
|                                                             | Debris and Litter In order to maintain water quality in acceptable conditions with regard to aesthetic quality, contractors should be required, under conditions of contract, to ensure that site management is optimised and that disposal of any solid materials, litter or wastes to marine waters does not occur.                                                                                                                                                                                                                                                                                                                                                                                     | <      |
| S5.8<br>(AEIAR-170/2013)                                    | Accidental Spillage  Contractor must register as a chemical waste producer if chemical wastes would be produced from the construction activities. The Waste Disposal Ordinance (Cap 354) and its subsidiary regulations in particular the Waste Disposal (Chemical Waste) (General) Regulation, should be observed and complied with for control of chemical wastes. Any service shop and maintenance facilities should be located on hard standings within a bunded area, and sumps and oil interceptors should be provided. Maintenance of vehicles and equipment involving activities with potential for leakage and spillage should only be indertaken within the areas and control these discharges. | <      |

| EIA Ref.                                                    | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Status |
|-------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
|                                                             | <ul> <li>Disposal of chemical wastes should be carried out in compliance with the Waste Disposal Ordinance. The Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes published under the Waste Disposal Ordinance details the requirements to deal with chemical wastes. General requirements are given as follows:</li> <li>Suitable containers should be used to hold the chemical wastes to avoid leakage or spillage during storage, handling and transport.</li> <li>Chemical waste containers should be suitably labelled, to notify and warn the personnel who are handling the wastes, to avoid accidents.</li> <li>Storage area should be selected at a safe location on site and adequate space should be allocated to the storage area.</li> </ul> | < < <  |
| Construction Waste Management                               | Management                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |        |
| S6.7<br>(AEIAR-170/2013)                                    | Prepare a Waste Management Plan, which becomes a part of the Environmental Management Plan, in accordance with the requirements stipulated in ETWB TC(W) No. 19/2005, approved by the Engineer/Supervising Officer of the Project based on current practices on construction sites.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | <      |
| S3.5<br>(AEIAR-130/2009)<br>and<br>S6.7<br>(AEIAR-170/2013) | Good Site Practices  It is not anticipated that adverse waste management related impacts would arise, provided that good site practices are adhered to. Recommendations for good site practices during construction activities include:  Nomination of an approved person, such as a site manager, to be responsible for good site practices, arrangements for collection and effective disposal to an appropriate facility, of all wastes generated at the site  Training of site personnel in proper waste management and chemical waste handling procedures  Provision of sufficient waste disposal points and regular collection for disposal                                                                                                                                    | < <    |

| • Appropriate measures to minimise windblown litter and dust during transportation of                                                                                        |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                                                                              |
| (including the disposal sites)  Regular cleaning and maintenance systems, sumps and oil interceptors                                                                         |
| Separation of chemical wastes for special handling and appropriate treatment                                                                                                 |
| Waste Reduction Measures<br>Good management and control can prevent the generation of a significant amount of                                                                |
| waste. Waste reduction is best achieved at the planning and design stage, as well as by ensuring the implementation of good site practices. Recommendations to achieve waste |
| reduction include:  Sort C&D waste from demolition of the remaining structures to recover recyclable                                                                         |
| portions such as metals<br>Segregation and storage of different types of waste in different containers, skips or                                                             |
| stockpiles to enhance reuse or recycling of materials and their proper disposal Encourage collection of aluminium cans, PET bottles and paper by providing separate          |
|                                                                                                                                                                              |
| Any unused chemicals or those with remaining functional capacity should be recycled.  Proper storage and site practices to minimise the potential for damage or              |
| Plan and stock construction materials carefully to minimize amount of waste                                                                                                  |
| Training should be provided to workers about the concepts of site cleanliness and                                                                                            |
| appropriate waste management procedures, including waste reduction, reuse and recycle.                                                                                       |

| Status              |                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                       |                                                                                                                                                      |                                                                                                          |                                                                                                                                                   |                                                                                                                                                                                                                        |                                                                                                                                                                                                                       |                                                                                                                                                   |                                                                                                                                                            |                                                                                                                                                                                        |                                                                                                                                                                                                                                                                             |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                     |                                                                                                                                                                                                                                                                 | <                                                                                                                                                                                                                                                                     | <                                                                                                                                                    | <                                                                                                        | <                                                                                                                                                 | <                                                                                                                                                                                                                      | <                                                                                                                                                                                                                     | <                                                                                                                                                 | <                                                                                                                                                          | <                                                                                                                                                                                      |                                                                                                                                                                                                                                                                             |
| Mitigation Measures | Construction and Demolition Materials  Mitigation measures and good site practices should be incorporated in the contract document to control potential environmental impact from handling and transportation of C&D material. The mitigation measures include: | <ul> <li>Where it is unavoidable to have transient stockpiles of C&amp;D material within the<br/>Project work site pending collection for disposal, the transient stockpiles shall be<br/>located away from waterfront or storm drains as far as possible.</li> </ul> | <ul> <li>Open stockpiles of construction materials or construction wastes on-site should be<br/>covered with tarpaulin or similar fabric.</li> </ul> | <ul> <li>Skip hoist for material transport should be totally enclosed by impervious sheeting.</li> </ul> | <ul> <li>Every vehicle should be washed to remove any dusty materials from its body and<br/>wheels before leaving a construction site.</li> </ul> | <ul> <li>The area where vehicle washing takes place and the section of the road between the<br/>washing facilities and the exit point should be paved with concrete, bituminous<br/>materials or hardcores.</li> </ul> | <ul> <li>The load of dusty materials carried by vehicle leaving a construction site should be<br/>covered entirely by clean impervious sheeting to ensure dust materials do not leak<br/>from the vehicle.</li> </ul> | All dusty materials should be sprayed with water prior to any loading, unloading or transfer operation so as to maintain the dusty materials wet. | The height from which excavated materials are dropped should be controlled to a minimum practical height to limit fugitive dust generation from unloading. | When delivering inert C&D material to public fill reception facilities, the material should consist entirely of inert construction waste and of size less than 250mm or other sizes as | agreed with the Secretary of the Public Fill Committee. In order to monitor the disposal of the surplus C&D material at the designed public fill reception facility and to control fly tipping, a trip-ticket system as stipulated in the ETWB TCW No. 31/2004 "Trip Ticket |
| EIA Ref.            | S3.5<br>(AEIAR-130/2009)                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                       |                                                                                                                                                      |                                                                                                          |                                                                                                                                                   |                                                                                                                                                                                                                        |                                                                                                                                                                                                                       |                                                                                                                                                   |                                                                                                                                                            |                                                                                                                                                                                        |                                                                                                                                                                                                                                                                             |

| EIA Ref.                                                       | Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Status |
|----------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
|                                                                | System for Disposal of Construction and Demolition Materials" should be included as one of the contractual requirement sand implemented by an Environmental Team undertaking the Environmental Monitoring and Audit work. An Independent Environmental Checker should be responsible for auditing the results of the system.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |        |
| S3.5<br>(AEIAR-130/2009)                                       | General Refuse General refuse should be stored in enclosed bins or compaction units separate from C&D material. A licensed waste collector should be employed by the contractor to remove general refuse from the site, separately from C&D material. Effective collection and storage methods (including enclosed and covered area) of site wastes would be required to prevent waste materials from being blown around by wind, wastewater discharge by flushing or leaching into the marine environment, or creating odour nuisance or pest and vermin problem                                                                                                                                                                                                                                                                                                                                                                      | <      |
| Construction Landscape and Visual                              | cape and Visual                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |        |
| S3.8.12<br>(AEIAR-130/2009)<br>and<br>S7.9<br>(AEIAR-170/2013) | <ul> <li>Minimized construction area and contractor's temporary works areas.</li> <li>All existing trees should be carefully protected during construction.</li> <li>Trees unavoidably affected by the works should be transplanted where practical.</li> <li>Detailed transplanting proposal will be submitted to relevant government departments for approval in accordance with ETWBC 2/2004 and 3/2006. Final locations of transplanted trees should be agreed prior to commencement of the work.</li> <li>Control of night-time lighting.</li> <li>Erection of decorative screen hoarding.</li> <li>Reduction of construction period to practical minimum.</li> <li>Limitation of / Ensuring no run-off into surrounding landscape and adjacent seawater areas.</li> <li>Temporary or advance landscape should be provided along the temporary access roads to the Cruise Terminal until such time as road D3 is open.</li> </ul> | N/A(1) |

| ment                                              | pment – Roads D3A & D4A                                             | X Non-compliance of mitigation measure;               | Non-compliance but rectified by the | contractor;          |                                                               |                                           |
|---------------------------------------------------|---------------------------------------------------------------------|-------------------------------------------------------|-------------------------------------|----------------------|---------------------------------------------------------------|-------------------------------------------|
| EIA Report (AEIAR-130/2009) – Kai Tak Development | EIA Report (AEIAR-170/2013) – Kai Tak Development – Roads D3A & D4A | <ul> <li>Compliance of mitigation measure;</li> </ul> | N/A Not Applicable at this stage;   | N/A(1) Not observed; | <ul> <li>Recommendation was made during site audit</li> </ul> | but improved/rectified by the contractor. |
| Remarks:                                          |                                                                     |                                                       |                                     |                      |                                                               |                                           |

APPENDIX F SUMMARIES OF ENVIRONMENTAL COMPLAINT, WARNING, SUMMON AND NOTIFICATION OF SUCCESSFUL PROSECUTION Contract No. KL/2014/01

# Kai Tak Development –Stage 2 Infrastructure Works for Developments at the Southern Part of the Former Runway

 $\label{eq:complaint} \textbf{Appendix} \ F-Summary \ of \ environmental \ complaint, \ warning, \ summon \ and \ notification \ of \ successful \ prosecution$ 

Reporting Month: January 2017

# Contract No. KL/2014/01

| Log<br>Ref. | Location | Received<br>Date | Details of<br>Complaint/warning/summon<br>and prosecution | Investigation/Mitigation<br>Action | Status |
|-------------|----------|------------------|-----------------------------------------------------------|------------------------------------|--------|
| N/A         | N/A      | N/A              | N/A                                                       | N/A                                | N/A    |

Remarks: No environmental complaint/warning/summon and prosecution were received in the reporting period.

# APPENDIX G WASTE GENERATED QUANTITY

Contract No. KL/2014/01

Name of Department: CEDD

Waste Flow Table for Year 2017

|           |                             | Actual Qu                              | Actual Quantities of Inert C&D Materials Generated Monthly | Materials Generated M       | fonthly                                          |               |              | Actual Quantities o.       | Actual Quantities of C&D Wastes Generated Monthly | erated Monthly |                                |
|-----------|-----------------------------|----------------------------------------|------------------------------------------------------------|-----------------------------|--------------------------------------------------|---------------|--------------|----------------------------|---------------------------------------------------|----------------|--------------------------------|
| Month     | Total Quantity<br>Generated | Hard Rock and Large<br>Broken Concrete | Reused in the<br>Contract                                  | Reused in other<br>Projects | Reused in other Disposed as Public Projects Fill | Imported Fill | Metals       | Paper/ cardboard packaging | Plastics                                          | Chemical Waste | Others, e.g.<br>general refuse |
|           | (in tonne)                  | (in tonne)                             | (in tonne)                                                 | (in tonne)                  | (in tonne)                                       | (in tonne)    | (in '000 kg) | (in '000kg)                | (in '000kg)                                       | (in '000kg)    | (in tonne)                     |
| Jan       | 15,470.22                   | 0                                      | 15,470.22                                                  | 0                           | 0                                                | 0             | 0            | 301                        | 19                                                | 0              | 53.3                           |
| Feb       |                             |                                        |                                                            |                             |                                                  |               |              |                            |                                                   |                |                                |
| Mar       |                             |                                        |                                                            |                             |                                                  |               |              |                            |                                                   |                |                                |
| Apr       |                             |                                        |                                                            |                             |                                                  |               |              |                            |                                                   |                |                                |
| May       |                             |                                        |                                                            |                             |                                                  |               |              |                            |                                                   |                |                                |
| June      |                             |                                        |                                                            |                             |                                                  |               |              |                            |                                                   |                |                                |
| Sub-total | 15,470.22                   | 0                                      | 15,470.22                                                  | 0                           | 0                                                | 0             | 0            | 301                        | 19                                                | 0              | 53.3                           |
| July      |                             |                                        |                                                            |                             |                                                  |               |              |                            |                                                   |                |                                |
| Aug       |                             |                                        |                                                            |                             |                                                  |               |              |                            |                                                   |                |                                |
| Sept      |                             |                                        |                                                            |                             |                                                  |               |              |                            |                                                   |                |                                |
| Oct       |                             |                                        |                                                            |                             |                                                  |               |              |                            |                                                   |                |                                |
| Nov       |                             |                                        |                                                            |                             |                                                  |               |              |                            |                                                   |                |                                |
| Dec       |                             |                                        |                                                            |                             |                                                  |               |              |                            |                                                   |                |                                |
| Total     | 15,470.22                   | 0                                      | 15,470.22                                                  | 0                           | 0                                                | 0             | 0            | 301                        | 19                                                | 0              | 53.3                           |

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, : (852)-24508238 : (852)-24508032 Fax Hong Kong. Email : mcl@fugro.com



# Appendix D

**Monthly EM&A Report** For Contract No. KL/2014/03 Kai Tak Development - Stage 3 Infrastructure Works for Developments at the Southern Part of the Former Runway

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

: (852)-24508238 1-15 Kwai Fung Crescent, Kwai Fong, : (852)-24508032 Fax Hong Kong.. Email : mcl@fugro.com.hk



### MONTHLY EM&A REPORT

# January 2017

Client Civil Engineering and Development

Department, HKSAR

Contract No. KLN/2015/07

**Contract Name: Environmental Monitoring Works for** 

Contract KL/2014/03 - Kai Tak Development - Stage 3 Infrastructure Works for Developments at the Southern Part of the Former Runway

0405/15/ED/0702A Report No.

EP-337/2009 New Distributor Roads Serving the Planned Kai Tak

**Development Area** 

EP-339/2009/A Decommissioning of the Remaining Parts (Ex-GFS

Building, Radar Station and Hong Kong Aviation Club)

of the former Kai Tak Airport

EP-451/2013 Trunk Road T2

Prepared by Alfred Y. S. Lam

Reviewed by Cyrus C. Y. Lai

Certified by Colin K. L. Yung

> **Environmental Team Leader** MateriaLab Consultants Limited



Ref.: CEDKTDS3EM00 0 0155L.17

16 February 2017

By Post and Email

Hyder-Meinhardt Joint Venture 20/F., AXA Tower, Landmark East, 100 How Mina Street, Kwun Tong, Kowloon, Hong Kong

Attention: Mr. Wong W K, Chris

Dear Mr. Wong,

Re: Contract No. KL/2014/03 - Kai Tak Development - Stage 3 Infrastructure Works for Developments at the Southern Part of the Former Runway Monthly EM&A Report for January 2017

Reference is made to the Environmental Team's submission of the Monthly EM&A Report for January 2017 (Report No. 0405/15/ED/0702A) we received by e-mail on 16 February 2017.

Please be informed that we have no adverse comment on the captioned report. We hereby verify the captioned submission according to Condition 3.3 of EP-337/2009, Condition 3.3 of EP-339/2009/A and Condition 3.4 of EP-451/2013.

Thank you for your attention. Please do not hesitate to contact us should you have any queries.

Yours sincerely, For and on behalf of Ramboll Environ Hong Kong Limited

F. C. Tsang

Independent Environmental Checker

CEDD C.C.

Attn.: Ms. Amy Chu

Fax: 2369 4980

For Beary

MateriaLab Attn.: Mr. Colin K. L. Yung

Fax: 2450 8032

CRBC Attn.: Mr. Arnold Chan

Fax: 2283 1689

Q:\Projects\CEDKTDS3EM00\02\_Proj\_Mgt\02\_Corr\CEDKTDS3EM00\_0\_0167L.17.docx

Room 723 & 725, 7/F, Block B,

Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, : (852)-24508238 : (852)-24508032 Tel Fax Hong Kong.. Email: mcl@fugro.com.hk



# **TABLE OF CONTENTS**

| EXE | CUTIVE SUMMARY                                             | ı  |
|-----|------------------------------------------------------------|----|
| 1.  | INTRODUCTION                                               | 1  |
| 2.  | AIR QUALITY                                                | 5  |
| 3.  | NOISE                                                      | 10 |
| 4.  | LANDSCAPE AND VISUAL                                       | 14 |
| 5.  | WASTE MANAGEMENT                                           | 15 |
| 6.  | SITE INSPECTION                                            | 16 |
| 7.  | ENVIRONMENTAL COMPLAINT AND NON-COMPLIANCE                 | 17 |
| 8.  | IMPLEMENTATION STATUS OF ENVIRONMENTAL MITIGATION MEASURES | 18 |
| 9.  | FUTURE KEY ISSUES                                          | 19 |
| 10. | CONCLUSIONS                                                | 20 |

### **FIGURES**

Figure 1 Project General Layout

Figure 2 Air and Noise Monitoring Locations

### **LIST OF APPENDICES**

| Appendix A | Construction Programme                                                                                  |
|------------|---------------------------------------------------------------------------------------------------------|
| Appendix B | Project Organization Chart                                                                              |
| Appendix C | Action and Limit Levels for Air Quality and Noise                                                       |
| Appendix D | Calibration Certificates of Monitoring Equipment                                                        |
| Appendix E | Environmental Monitoring Schedules                                                                      |
| Appendix F | Air Quality Monitoring Data                                                                             |
| Appendix G | Noise Monitoring Data                                                                                   |
| Appendix H | Event Action Plans                                                                                      |
| Appendix I | Waste Flow Table                                                                                        |
| Appendix J | Environmental Mitigation Implementation Schedule (EMIS)                                                 |
| Appendix K | Weather and Meteorological Conditions during Reporting Month                                            |
| Appendix L | Cumulative statistics on Environmental Complaints, Notifications of Summons and Successful Prosecutions |
| Appendix M | Summary of Site Audit in the Reporting Month                                                            |
| Appendix N | Outstanding Issues and Deficiencies                                                                     |

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

: (852)-24508238 1-15 Kwai Fung Crescent, Kwai Fong, : (852)-24508032 Hong Kong.. Email : mcl@fugro.com.hk



### **EXECUTIVE SUMMARY**

- i. The Civil Engineering and Development Department HKSAR has appointed MateriaLab Consultants Limited (MCL) to undertake the Environmental Team services for the Project and implement the EM&A works.
- ii. This Monthly EM&A report presents the environmental monitoring and audit works for the period between 1 January 2017 and 31 January 2017. As informed by the Contractor, major activities in the reporting month were:
  - Temporary utility diversion;
  - Implementation of Temporary Traffic Arragement (TTA);
  - Construction of Tunnel structure;
  - Construction of Subway B:
  - Construction of guide walls and D-walls; and
  - Construction of District Cooling System Works.

### **Breaches of the Action and Limit Levels**

iii. No Action / Limit Level exceedance was recorded for 24-hr TSP and construction noise at KTD1a, KTD2a and KER1b in the reporting month.

# Complaint, Notification of Summons and Successful Prosecution

iv. A compliant received on 7th December 2016 was referred from EPD on 15th December 2016 regarding the sand and mud dropped from the vehicle that caused Cheung Yip Street and Shing Cheong dusty. The notification of complaint was received by ET on 27th January 2017.

### **Reporting Changes**

v. There was no reporting change in the reporting month.

# **Future Key Issues**

vi. The key issues to be considered in the coming reporting month include:

Potential environmental impacts arising from the above construction activities are mainly associated with construction dust, construction noise, water quality, waste management and landscape and visual impact.

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

: (852)-24508238 : (852)-24508032 1-15 Kwai Fung Crescent, Kwai Fong, Fax Hong Kong.. Email : mcl@fugro.com.hk



#### 1. INTRODUCTION

#### 1.1 **Background**

- The Kai Tak Development is located in the south-eastern part of Kowloon Peninsula of the HKSAR, comprising the apron and runway areas of the former Kai Tak Airport and existing waterfront areas at To Kwa Wan, Ma Tau Kok, Kowloon Bay, Kwun Tong and Cha Kwo Ling.
- 1.1.2 Contract No. KL/2014/03 is the works package to construct an approximately 420m long supporting underground structure (SUS) underneath Shing Cheong Road and Cheung Yip Street. The EM&A programme under this Contract is governed by three EPs (EP-337/2009, EP-339/2009/A and EP-451/2013) and two EM&A Manuals (AEIAR-130/2009 and AEIAR-174/2013). The Works to be executed under this Contract and corresponding EPs include but not be limited to the following main items:

### EP-451/2013 - Trunk Road T2

Construction of approximately 420m long supporting underground structure (SUS) (i) including diaphragm walls, barrettes, piled foundation, top and bottom slabs, end wall and adits underneath Shing Cheong Road and Cheung Yip Street;

# EP-337/2009 - New Distributor Roads Serving the Planned Kai Tak Development

- Widening and re-alignment of Cheung Yip Street of approximately 330m long and associated footpaths:
- Demolition, reconstruction and widening of Shing Cheong Road of approximately 410m (iii) long and associated footpaths;
- Construction of drainage outfall and modification of existing seawall; (iv)
- Construction of ancillary works including surface drainage, sewerage, water, fire (v) fighting, street lighting, street furniture, road marking, road signage, utilities and services, irrigation and landscape works.

# EP-339/2009/A - Decommissioning of the Remaining Parts (Ex-GFS Building, Radar Station and Hong Kong Aviation Club) of the former Kai Tak Airport

(vi) Demolition of RADAR Tower and guard house;

### Other works not covered by any EP

- Construction of two subways between Phase II of New Acute Hospital (Site A) and Hong Kong Children's Hospital (Site C), and between Phase I of New Acute Hospital (Site B) and Site C;
- (viii) Construction of District Cooling System (DCS) along Cheung Yip Street and Shing Cheong Road
- The location and boundary of the site is shown in **Figure 1**.
- This Monthly EM&A report is required under EP-337/2009 Condition 3.3, EP-339/2009/A Condition 3.3 and EP-451/2013 Condition 3.4. It is to report the results and findings of the EM&A programme required in the EM&A Manuals.
- This is the eleventh monthly EM&A Report which summaries the impact monitoring results and audit findings for the Project within the period between 1 January 2017 and 31 January 2017.

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

: (852)-24508238 1-15 Kwai Fung Crescent, Kwai Fong, : (852)-24508032 Hong Kong.. Email : mcl@fugro.com.hk



#### 1.2 **Project Organization**

- The project proponent was the Civil Engineering and Development Department, HKSAR 1.2.1 (CEDD), Hyder Meinhardt Joint Venture (HMJV) was commissioned by CEDD as the Engineer for the Project. Ramboll Environ Hong Kong Limited was commissioned as the Independent Environmental Checker (IEC). China Road and Bridge Corporation (Hong Kong) (CRBC) was appointed as the main contractor for the construction works under the contract KL/2014/03. MateriaLab Consultants Limited (MCL) was appointed as the Environmental Team (ET) by CEDD to implement the EM&A programme for the Project.
- 1.2.2 The organization structure is shown in Appendix B. The key personnel contact names and numbers for the Project are summarized in **Table 1.1**.

Table 1.1 Contact Information of Key Personnel

| Table 1.1 Contact information of Ney 1 croomics |                                         |                             |           |           |  |
|-------------------------------------------------|-----------------------------------------|-----------------------------|-----------|-----------|--|
| Party                                           | Position                                | Name                        | Telephone | Fax       |  |
| Project Proponent (CEDD)                        | Co-ordinator                            | Ms. Amy Chu                 | 3106 3172 | 2369 4980 |  |
| Engineer's<br>Representative (HMJV)             | Chief Resident<br>Engineer              | Mr. W. K., Chris<br>Wong    | 3742 3803 | 3742 3899 |  |
| IEC<br>(Ramboll Environ Hong<br>Kong Limited)   | Independent<br>Environmental<br>Checker | Mr. F. C. Tsang             | 3465 2851 | 3465 2899 |  |
| Main Contractor (CRBC)                          | Site Agent                              | Mr. Chan See Wai,<br>Arnold | 9380 4110 | 2283 1689 |  |
| Main Contractor (CRBC)                          | Environmental<br>Officer                | Mr. Andy Choy               | 6278 2693 | 2283 1689 |  |
| ET (MCL)                                        | Environmental<br>Team Leader            | Mr. Colin Yung              | 3565 4114 | 3565 4160 |  |

#### 1.3 **Construction Programme and Activities**

- 1.3.1 The construction of the Project commenced in February 2016 and is expected to complete in 2020. The construction programme is shown in **Appendix A**.
- 1.3.2 A summary of the major construction activities undertaken in the reporting month were:
  - Temporary utility diversion;
  - Implementation of Temporary Traffic Arragement (TTA);
  - Construction of Tunnel structure;
  - Construction of Subway B;
  - Construction of guide walls and D-walls: and
  - Construction of District Cooling System Works.

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong,

: (852)-24508238 : (852)-24508032 Hong Kong. Email : mcl@fugro.com.hk



#### 1.4 Inter-relationship with the environmental protection/ mitigation measures with the construction programme

- According to the construction activities in the construction programme mentioned in Section 1.4.1 1.3.2, the following environmental protection/ mitigation measures including Air Quality Impact, Construction Noise Impact, Water Quality Impact, Chemical and Waste Management, Landscape and Visual Impact shall be implemented:
  - Sufficient watering of the works site with the active dust emitting activities;
  - Limitation of the speed for vehicles on unpaved site roads;
  - Properly cover or enclosure of the stockpiles and dusty materials;
  - Good site practices on loading dusty materials;
  - Providing sufficient vehicles washing facilities at every vehicle exit point;
  - Good maintenance to the plant and equipment;
  - Use of guieter plant and Quality Powered Mechanical Equipment (QPME);
  - Use of acoustic fabric and noise barrier;
  - Using the approved Non-road Mobile Machineries (NRMMs);
  - Proper storage and handling of chemical:
  - Appropriate desilting, oil interceptors or sedimentation devices provided on site for treatment before discharge;
  - Onsite waste sorting and implementation of trip ticket system;
  - Training of the site personnel in proper waste management and chemical waste handling procedures;
  - Proper storage of the construction materials:
  - Erection of decorative screen hoarding:
  - Strictly following the Environmental Permits and Licenses:
  - Provide sufficient mitigation measures as recommended in Approved EIA Reports

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

: (852)-24508238 1-15 Kwai Fung Crescent, Kwai Fong, : (852)-24508032 Hong Kong.. Email : mcl@fugro.com.hk



#### 1.5 Status of Environmental Licences, Notifications and Permits

A summary of the relevant environmental licenses, permits and/or notifications on 1.5.1 environmental protection for this Contract is presented in Table 1.2.

Table 1.2 Relevant Environmental Licenses, Permits and/or Notifications

| Environmental<br>License / Permit /<br>Notification                            | Reference Number                            | Valid From                                         | Valid Till                                   |
|--------------------------------------------------------------------------------|---------------------------------------------|----------------------------------------------------|----------------------------------------------|
| Environmental Permit                                                           | EP-337/2009<br>EP-339/2009/A<br>EP-451/2013 | 23 April 2009<br>18 June 2009<br>19 September 2013 | Not Applicable Not Applicable Not Applicable |
| Notification pursuant to<br>Air Pollution<br>(Construction Dust)<br>Regulation | 395601                                      | 16 November 2015                                   | Not Applicable                               |
| Billing Account for Waste Disposal                                             | A/C No.: 7023814                            | 30 November 2015                                   | Not Applicable                               |
| Construction Noise<br>Permit                                                   | GW-RE1008-16                                | 19 October 2016                                    | 09 April 2017                                |
| Construction Noise<br>Permit                                                   | PP-RE0032-16                                | 23 November 2016                                   | 15 May 2017                                  |
| Wastewater Discharge<br>License                                                | WT00023125-2015                             | 6 January 2016                                     | 31 January 2021                              |
| Chemical Waste<br>Producer License                                             | 5213-247-C1232-12                           | 23 November 2015                                   | Not Applicable                               |

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

: (852)-24508238 1-15 Kwai Fung Crescent, Kwai Fong, : (852)-24508032 Fax Hong Kong.. Email : mcl@fugro.com.hk



#### 2. **AIR QUALITY**

#### 2.1 **Monitoring Requirement**

In accordance with the approved EM&A Manuals, 24-hour Total Suspended Particulates (TSP) level at the designated air quality monitoring station is required. Impact 24-hour TSP monitoring should be carried out at least once every 6 days. In case of complaints, 1-hour TSP monitoring should be carried out at least 3 times per 6 days when the highest dust impacts are likely to occur. The Action and Limit Levels of the air quality monitoring are given in Appendix C.

#### 2.2 **Monitoring Equipment**

The 24-hour TSP air quality monitoring was performed using High Volume Air Samplers (HVS) located at each of the designated monitoring station. Portable TSP Monitors would be used in case of complaints for 1-hour TSP monitoring.

**Table 2.1** summarizes the equipment used in air quality monitoring.

Table 2.1 Air Quality Monitoring Equipment

| Item | Brand          | Model         | Equipment                    | Serial Number  |
|------|----------------|---------------|------------------------------|----------------|
| 1    |                | TE-5170 (TSP) | High Volume Sampler          |                |
|      |                | TE-300-310X   | - Mass Flow Controller       | 2037           |
|      | Tisch          | TE-5005X      | - Blower Motor Assembly      | 3482           |
|      |                | TE-5007X      | - Mechanical Timer           | 4488           |
|      |                | TE-5009X      | - Continuous Flow Recorder   | 4371           |
| 2    |                | TE-5170 (TSP) | High Volume Sampler          |                |
|      |                | TE-300-310X   | - Mass Flow Controller       | 2524           |
|      | Tisch TE-5005X |               | - Blower Motor Assembly      | 4037           |
|      | TE-5007X       |               | - Mechanical Timer           | 5160           |
|      |                | TE-5009X      | - Continuous Flow Recorder   | 4377           |
| 3    |                | TE-5170 (TSP) | High Volume Sampler          |                |
|      |                | TE-300-310X   | - Mass Flow Controller       | 2618           |
|      | Tisch          | TE-5005X      | - Blower Motor Assembly      | 3838           |
|      | G3031          |               | - Mechanical Timer           | 2251           |
|      |                | G1051         | - Continuous Flow Recorder   | 2307           |
| 4    | Tisch          | TE-5025A      | HVS Sampler Calibrator       | 0438320 / 2456 |
| 5    | *Sibata        | Model LD-3B   | Sibata Portable TSP Monitors | NA             |

Note:

No complaint of air quality was received. Therefore, no impact 1-hour TSP monitoring was conducted.

#### 2.3 **Monitoring Methodology**

#### 2.3.1 24-hour TSP air quality monitoring

### **HVS Installation**

The following guidelines were adopted during the installation of HVS:

- Sufficient support is provided to secure the samplers against gusty wind.
- No two samplers are placed less than 2 meters apart.

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong,

: (852)-24508238 Fax : (852)-24508032 Hong Kong.. Email : mcl@fugro.com.hk



- The distance between the sampler and an obstacle, such as buildings, is at least twice the height that the obstacle protrudes above the sampler.
- A minimum of 2 meters of separation from walls, parapets and penthouses is required for rooftop samples.
- A minimum of 2 meters separation from any supporting structure, measured horizontally is required.
- No furnaces or incineration flues are nearby.
- Airflow around the samplers is unrestricted.
- The samplers are more than 20 meters from the drip line.
- Any wire fence and gate, to protect the sampler, should not cause any obstruction during monitoring.

### Filters Preparation

Fiberglass filters (provided by the HOKLAS accredited laboratory) shall be used (Note: these filters have a collection efficiency of larger than 99% for particles of 0.3 µm diameter). A HOKLAS accredited laboratory (ALS Technichem (HK) Pty Ltd.) is responsible for the preparation of 24-hr conditioned and pre-weighed filter papers for monitoring team.

All filters are equilibrated in the conditioning environment for 24 hours before weighing. The conditioning environment temperature is around 25°C and not variable by more than ±3°C; the relative humidity (RH) is < 50% and not variable by more than ±5%. A convenient working RH is 40%.

# Operating / Analytical Procedures

Operating / analytical procedures for the air quality monitoring are highlighted as follows:

- Prior to the commencement of the dust sampling, the flow rate of the HVS are properly set (between 0.6 m³/min and 1.7 m³/min) in accordance with the EM&A manual. The flow rate shall be indicated on the flow rate chart.
- The power supply shall be checked to ensure the samplers worked properly.
- On sampling, the samplers shall be operated for 5 minutes to establish thermal equilibrium before placing any filter media at the designated air quality monitoring station.
- The filter holding frame is then removed by loosening the four nuts and carefully a weighted and conditioned filter is centered with the stamped number upwards, on a supporting screen.
- The filter shall be aligned on the screen so that the gasket formed an airtight seal on the outer edges of the filter. Then the filter holding frame is tightened to the filter holder with swing bolts. The applied pressure should be sufficient to avoid air leakage at the edges.
- The shelter lid shall be closed and secured with the aluminum strip.
- The timer is then programmed. Information shall be recorded on the record sheet, which included the starting time, the weather condition and the filter number (the initial weight of the filter paper can be found out by using the filter number).
- After sampling, the filter shall be removed and sent to laboratory for weighing. The elapsed time is also recorded.
- Before weighing, all filters are equilibrated in a conditioning environment for 24 hours. The conditioning environment temperature should be between 25°C and 30°C and not vary by more than ±3°C; the relative humidity (RH) should be < 50% and not vary by more than ±5%. A convenient working RH is 40%. Weighing results are returned to MCL for further analysis of TSP concentrations collected by each filter.

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong,

: (852)-24508238 : (852)-24508032 Hong Kong.. Email : mcl@fugro.com.hk



# 2.3.2 1-hour TSP air quality monitoring

### Operating / Analytical Procedures

The measuring procedures of the 1-hr dust meter are in accordance with the Manufacturer's instruction Manual as follows:

- Pull up the air sampling inlet cover
- Change the Mode 0 to BG once
- Push Start/Stop switch once
- Turn the knob to SENSI.ADJ and press it
- Push Start/Stop switch once
- Return the knob to the position MEASURE slowly
- Push the timer set switch to set measuring time
- Remove the cap and make a measurement

#### 2.4 Maintenance / Calibration

# 24-hour TSP air quality monitoring

The following maintenance / calibration are required for the HVS:

- The high volume motors and their accessories are properly maintained. Appropriate maintenance such as routine motor brushes replacement and electrical wiring checking are made to ensure that the equipments and necessary power supply are in good working condition.
- All HVS shall be calibrated (five point calibration) using Calibration Kit upon installation and thereafter in every 3 months.
- A copy of the calibration certificates for the HVS and calibrator are provided in **Appendix** D.

# 2.4.2 1-hour TSP air quality monitoring

The portable TSP monitor should be calibrated at 1 year intervals

#### 2.5 **Monitoring Locations**

- According to the EM&A Manual, three air quality monitoring locations, namely KTD1, KTD2 and KER1, are covered by this Contract within the South Apron Area of Former Kai Tak Airport. The other two air quality monitoring locations, which are identified in Cha Kwo Ling area, are farther than 500m away from the site boundary and thus not covered by this Contract. The monitoring works in Cha Kwo Ling area are covered by other Contract(s) respectively.
- 2.5.2 According to the approved alternative baseline air quality and noise monitoring locations (EPD reference: EP2/K19/A/21 Pt.5), the original monitoring locations (KTD1, KTD2 and KER1) are proposed to be replaced by alternative monitoring locations (KTD1a, KTD2a and KER1b) for air quality monitoring, they are summarized in Table 2.2 and shown in Figure 2.

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

: (852)-24508238 1-15 Kwai Fung Crescent, Kwai Fong, : (852)-24508032 Fax Hong Kong.. Email : mcl@fugro.com.hk



Table 2.2 **Location of Air Quality Monitoring Station** 

| Monitoring Station | Location                                                         |
|--------------------|------------------------------------------------------------------|
| KTD1a              | Centre of Excellence in Paediatrics (Children's Hospital)        |
| KTD2a              | G/IC Zone next to Kwun Tong Bypass (Future Hospital at Site 3C1) |
| KER1b              | Site Boundary at Cheung Yip Street                               |

#### 2.6 **Results and Observations**

- 2.6.1 The schedule of air quality monitoring in reporting month is provided in **Appendix E**.
- 2.6.2 No Action / Limit Level exceedance was recorded for 24-hr TSP at KTD1a, KTD2a and KER1b in the reporting month.
- 2.6.3 No complaint of air quality was received. Therefore, no impact 1-hour TSP monitoring was conducted in the reporting month.
- During the reporting month, major dust sources including loading and unloading of C&D wastes, vehicles movement were observed in the site. Non-project related construction activities at the nearby construction site and road traffic along Shing Cheong Road, Cheung Yip Street and the Kwun Tong By-pass were observed. The above factors may affect the monitoring results.
- 2.6.5 The weather conditions during the monitoring are provided in **Appendix K**.
- 2.6.6 The monitoring data of 24-hr TSP are summarized in **Table 2.3**. Detailed monitoring data are presented in Appendix F.

Summary of 24-hr TSP Monitoring Results Table 2.3

| Parameter            | Monitoring<br>Station | Average<br>(µg/m³) | Range (µg/<br>m³) | Action Level (µg/ m³) | Limit Level<br>(µg/ m³) |
|----------------------|-----------------------|--------------------|-------------------|-----------------------|-------------------------|
| 24-hr TSP            | KTD1a                 | 99                 | 17 – 142          | 177                   |                         |
| in μg/m <sup>3</sup> | KTD2a                 | 59                 | 25 – 94           | 157                   | 260                     |
| ιτι μg/ττι           | KER1b                 | 66                 | 36 – 95           | 172                   |                         |

2.6.7 The Event and Action Plan for air quality is given in **Appendix H**.

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

: (852)-24508238 1-15 Kwai Fung Crescent, Kwai Fong, : (852)-24508032 Hong Kong.. Email : mcl@fugro.com.hk



#### 2.7 Comparison of 24-hr TSP Monitoring Results with EIA Predictions

The monitoring data of 24-hr TSP was compared with the EIA predictions as summarized in 2.7.1 **Table 2.4.** 

Table 2.4 Comparison of 24-hr TSP data with EIA predictions

| Monitoring<br>Station | Receiver<br>Reference |     |          | Average 24-hour TSP concentration in January 2017 (µg/m³) |
|-----------------------|-----------------------|-----|----------|-----------------------------------------------------------|
| KTD1a                 | KTD3                  | 126 | 17 – 142 | 99                                                        |
| KTD2a                 | •                     | -   | 25 – 94  | 59                                                        |
| KER1b                 | KTD6                  | 169 | 36 – 95  | 66                                                        |

Note:

For KTD2a, there was no receiver reference in the EIA report, EIAR-174/2013. Predicted Maximum TSP Concentration extracted from Table 4.14 of EIA Report, EIAR-174/2013.

- 2.7.2 The 24-hour TSP monitoring results at KER1b were below the Predicted Maximum 24-hr TSP concentration in the approved Environmental Impact Assessment (EIA) Report and no Action / Limit Level exceedance was recorded in the reporting period.
- The 24-hour TSP monitoring result of KTD 1a on 5 January 2017 exceeded the prediction in the approved EIA report. However, the result did not exceed the Action Level. Mitigation measures, including water spraying and covering of stockpiles of dusty materials were adopted and observed near the monitoring station KTD1a during the site inspections on 5 January 2017. The discrepancy between the 24-hour TSP concentration and EIA Prediction in KTD1a is considered due to dust source from the non-project related construction activities near the monitoring station and the road travel along Shing Fung Road.

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong,

: (852)-24508238 : (852)-24508032 Fax Hong Kong.. Email : mcl@fugro.com.hk



#### 3. **NOISE**

#### 3.1 **Monitoring Requirement**

In accordance with the approved EM&A Manuals, Leg (30min) monitoring is conducted for at least once a week during the construction phase between 0700 and 1900 on normal weekdays at the designated monitoring locations.

#### 3.2 **Monitoring Equipment**

The sound level meter used in noise monitoring will comply with the International Electrotechnical Commission Publication (IEC) 651:1979 (Type 1) and 804:1985 (Type 1) specifications as referred to in the Technical Memorandum issued under the Noise Control Ordinance (NCO).

Sound level calibrator will be used for the on-site calibration of the meter. This calibrator complies with the IEC Publication 942 (1988) Class 1 and ANSI S1.40 - 1984. Noise measurements were only accepted to be valid if the calibration levels from before and after the measurement agree to within 1.0dB.

Measurements shall be recorded to the nearest 0.1dB. This noise monitors are programmed to measure A-weighted equivalent continuous sound pressure level at 30-minute intervals between 0700 and 1900 on normal weekdays at least once a week when construction activities are underway.

Table 3.1 summarizes the noise monitoring equipment model being used for this project.

Table 3.1 **Noise Monitoring Equipment** 

| Item | Brand        | Model           | Equipment                     | Serial<br>Number |
|------|--------------|-----------------|-------------------------------|------------------|
| 1    | Casella      | CEL-63X Series  | Integrating Sound Level Meter | 2451028          |
| 3    | Casella      | CEL-633A Series | Integrating Sound Level Meter | 3756084          |
| 4    | Casella      | CEL-633A Series | Integrating Sound Level Meter | 3756127          |
| 5    | Casella      | CEL-120/1       | Calibrator                    | 5230736          |
| 6    | Casella      | CEL-120/1       | Calibrator                    | 5230742          |
| 7    | Casella      | CEL-120/1       | Calibrator                    | 4358251          |
| 8    | Smart Sensor | AR816+          | Wind Speed Anemometer         | MC-A-001         |

#### 3.3 **Monitoring Parameters and Frequency**

**Table 3.2** presents the noise monitoring parameters and frequencies.

**Monitoring Parameters and Frequencies of Noise Monitoring** Table 3.2

| Parameter                                  | Frequency and Period                                                 |
|--------------------------------------------|----------------------------------------------------------------------|
| LAeq (30min)                               | At each station at 0700-1900 hours on normal weekdays at a frequency |
| L10 and L90 will be recorded for reference | of once a week                                                       |

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong,

: (852)-24508238 Fax : (852)-24508032 Hong Kong. Email : mcl@fugro.com.hk



#### 3.4 **Monitoring Methodology**

The monitoring procedures are as follows:

- The monitoring station is set at a point 1m from the exterior of the sensitive receivers building façade and set at a position 1.2m above the ground.
- The battery condition is checked to ensure good functioning of the meter.
- Parameters such as frequency weighting, the time weighting and the measurement time are set as follows:

frequency weighting: A

time weighting: Fast

- measurement time: Weekly 30 minutes between 0700-1900 on normal weekdays
- Prior to and after noise measurement, the meter shall be calibrated using the calibrator for 94.0 dB at 1000 Hz. If the difference in the calibration level before and after measurement is more than 1.0 dB, the measurement will be considered invalid and repeat of noise measurement is required after re-calibration or repair of the equipment.
- Noise monitoring should be cancelled in the presence of fog, rain, and wind with a steady speed exceeding 5 m/s, or wind with gusts exceeding 10 m/s.
- Noise measurement should be paused during periods of high intrusive noise if possible and observation shall be recorded when intrusive noise is not avoided.
- At the end of the monitoring period, the Leg, L10 and L90 are recorded. In addition, site conditions and noise sources are recorded on a standard record sheet.

#### 3.5 **Maintenance / Calibration**

Maintenance and Calibration procedures are as follows:

- The microphone head of the sound level meter and calibrator should be cleaned with a soft cloth at quarterly intervals.
- The sound level meter and calibrator should be calibrated annually by a HOKLAS laboratory.
- Relevant calibration certificates are provided in **Appendix D**.

#### 3.6 **Monitoring Locations**

- According to the EM&A Manual, three noise monitoring locations, namely KTD1, KTD2 and KER1, are covered by this Contract within the South Apron Area of Former Kai Tak Airport. The other two noise quality monitoring locations, which are identified in Cha Kwo Ling area, are farther than 300m away from the site boundary and thus not covered by this Contract. The monitoring works in Cha Kwo Ling area are covered by other Contract(s) respectively.
- 3.6.2 According to the approved alternative baseline air quality and noise monitoring locations (EPD reference: EP2/K19/A/21 Pt.5), the original monitoring locations (KTD1, KTD2 and KER1) are proposed to be replaced by alternative monitoring locations (KTD1a, KTD2a and KER1b) for noise monitoring, they are summarized in **Table 3.3** and shown in **Figure 2**.

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

: (852)-24508238 1-15 Kwai Fung Crescent, Kwai Fong, : (852)-24508032 Fax Hong Kong.. Email : mcl@fugro.com.hk



Table 3.3 **Location of Noise Monitoring Station** 

| Monitoring Station | Location                                                         |
|--------------------|------------------------------------------------------------------|
| KTD1a              | Centre of Excellence in Paediatrics (Children's Hospital)        |
| KTD2a              | G/IC Zone next to Kwun Tong Bypass (Future Hospital at Site 3C1) |
| KER1b              | Site Boundary at Cheung Yip Street                               |

#### 3.7 **Results and Observations**

- 3.7.1 The schedule of noise monitoring in reporting month is provided in **Appendix E**.
- 3.7.2 During the monitoring month, at KTD1a, non-project related construction activities at the nearby construction site and road traffic along Shing Cheong Road were observed in the surroundings. At KTD2a, road traffic along the Kwun Tong By-pass was observed. At KER1b, road traffic along Cheung Yip Street was observed. Major noise sources including noise emission from plant & PME and some other construction activities, travel of vehicles, loading and unloading of C&D waste were observed in the site. The above factors may affect the monitoring results.
- No raining and wind with speed over 5 m/s was observed during noise monitoring according to the onsite observation. The weather conditions during the monitoring month are provided in Appendix K.
- 3.7.4 The noise monitoring data are summarized in Table 3.4. Detailed monitoring data are presented in Appendix G.

Table 3.4 Summary of Noise Impact Monitoring Results

| Time Period                      | Leq (30min) dB(A)<br>(Range) |         | Action Level | Limit Level                               |          |
|----------------------------------|------------------------------|---------|--------------|-------------------------------------------|----------|
| Timo Torioa                      | Noise Monitoring Stations    |         |              |                                           |          |
|                                  | KTD1a                        | KTD2a   | KER1b        |                                           |          |
| 0700-1900 hrs on normal weekdays | 67 - 73                      | 64 - 69 | 65 - 73      | When one documented complaint is received | 75 dB(A) |

Note:

KTD1a: Façade Measurement

KTD2a & KER1b: Free-field measurement (+3dB(A) correction has been applied)

- 3.7.5 No Action / Limit Level exceedance was recorded for construction noise in the reporting month.
- 3.7.6 The Action and Limit Levels for noise impact monitoring have been set are presented in Appendix C.
- 3.7.7 The Event and Action Plan for noise is given in **Appendix H**.

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

: (852)-24508238 1-15 Kwai Fung Crescent, Kwai Fong, : (852)-24508032 Hong Kong.. Email : mcl@fugro.com.hk



#### 3.8 **Comparison of Noise Monitoring Results with EIA Predictions**

The noise monitoring data was compared with the EIA predictions as summarized in **Table 3.5**. 3.8.1

Table 3.5 Comparison of Noise Monitoring data with EIA predictions

| Monitoring<br>Station | Receiver<br>Reference | Maximum Predicted Mitigated<br>Construction Noise Level,<br>dB(A) | Leq <sub>(30min)</sub> dB(A)<br>in January 2017 |
|-----------------------|-----------------------|-------------------------------------------------------------------|-------------------------------------------------|
| KTD1a                 | KTD1                  | 74                                                                | 67 - 73                                         |
| KTD2a                 | KTD2                  | 75                                                                | 64 - 69                                         |
| KER1b                 | KER1                  | 75                                                                | 65 - 73                                         |

Note:

Maximum Predicted Mitigated Construction Noise Level extracted from Table 5.13 of EIA Report, EIAR-174/2013.

3.8.2 The impact noise monitoring results in the reporting month were below the Maximum Predicted Mitigated Construction Noise Level in the approved Environmental Impact Assessment (EIA) Report and no Action / Limit Level exceedance was recorded in the reporting period.

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong..

ding, Tel : (852)-24508238 escent, Kwai Fong, Fax : (852)-24508032 Email : mcl@fugro.com.hk



### 4. LANDSCAPE AND VISUAL

# 4.1 Audit Requirements

- 4.1.1 As per the Trunk Road T2 EM&A Manual, the landscape and visual mitigation measures during the construction phase shall be audited by a Registered Landscape Architect, as a member of the Environmental Team, at least once every two weeks to ensure compliance with the intended aims of the measures.
- 4.1.2 According to the Kai Tak Development EM&A Manual, measures to mitigate landscape and visual impacts during construction should be checked to ensure compliance with the intended aims of the measures. The progress of the engineering works shall be regularly reviewed onsite to identify the earliest practical opportunities for the landscape works to be undertaken. The ET shall report on the Contractor's compliance on a weekly basis.

### 4.2 Results and Observations

- 4.2.1 To monitor and audit the implementation of landscape and visual mitigation measures, four weekly Landscape and Visual Site audits were carried out on 5, 12 18 and 26 January 2017 and two of them, 5 and 18 January 2017 were carried out by a Registered Landscape Architect. The weekly Landscape and Visual Impact reports were counter-signed by IEC as according to the requirement of EM&A Manual (AEIAR-130/2009).
- 4.2.2 During the Site audit on 5 January 2017, it is observed that open stockpiles at Portion I were not fully covered by impervious sheeting. The item was rectified by the Contractor and inspected on 12 January 2017.
- 4.2.3 During the Site audit on 18 January 2017, it is observed that open stockpiles at Portion I were not fully covered by impervious sheeting. The item was rectified by the Contractor and inspected on 26 January 2017.
- 4.2.4 Should non-compliance of the landscape and visual impact occur, action in accordance to the event action plan presented in **Appendix H** shall be carried out.

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong,

: (852)-24508238 : (852)-24508032 Hong Kong.. Email : mcl@fugro.com.hk



#### 5. **WASTE MANAGEMENT**

#### 5.1 **Audit Requirements**

- The effective management of waste arising during the construction phase will be monitored through the site audit programme. Regular audits and site inspections should be carried out to ensure that the recommended good site practices and other mitigation measures are implemented by the Contractor.
- 5.1.2 The audit should look at all aspects of on-site waste management practices including the waste generation, storage, recycling, transport and disposal. The aims of waste audit are:
  - to ensure the waste arising from the works are handled, stored, collected, transferred and disposed of in an environmentally acceptable manner;
  - verify the implementation status and evaluate the effectiveness of the mitigation measures; and
  - to encourage the reuse and recycling of material.

#### 5.2 **Results and Observations**

- C&D materials and wastes sorting were carried out on site. Receptacles were available for 5.2.1 C&D wastes and general refuse collection.
- 5.2.2 The amount of wastes generated by the site activities in the reporting month is shown in Appendix I.
- 5.2.3 The Contractor is advised to properly maintain on site C&D materials and wastes collection, sorting and recording system and maximize reuse / recycle of C&D materials and wastes. The Contractor is reminded to properly maintain the site tidiness and dispose of the wastes accumulated on site regularly and properly.
- The Contractor is reminded that chemical waste containers should be properly treated and stored temporarily in designated chemical waste storage area on site in accordance with the Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes.

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

: (852)-24508238 1-15 Kwai Fung Crescent, Kwai Fong, : (852)-24508032 Hong Kong.. Email : mcl@fugro.com.hk



#### 6. SITE INSPECTION

#### 6.1 **Site Inspection**

- Site inspections were carried out weekly to monitor the implementation of proper environmental pollution control and mitigation measures for the Project. A summary of the mitigation measures implementation schedule is provided in **Appendix J**.
- 6.1.2 In the reporting month, four site inspections were carried out on 5, 12 18 and 26 January 2017. Two of them, held on 5 and 18 January 2017 were the joint inspections with the IEC, ER, the Contractor and the ET.
- 6.1.3 No outstanding issues were reported during the reporting month. Details of observations recorded during the site inspections are summarized in Appendix M.
- 6.1.4 All the follow-up actions requested by Contractor's ET and IEC during the site inspections were undertaken as reported by the Contractor and confirmed in the following weekly site inspection conducted during the reporting month.

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

: (852)-24508238 1-15 Kwai Fung Crescent, Kwai Fong, : (852)-24508032 Hong Kong.. Email : mcl@fugro.com.hk



#### 7. **ENVIRONMENTAL COMPLAINT AND NON-COMPLIANCE**

#### 7.1 **Environmental Exceedance**

No Action / Limit Level exceedance was recorded for 24-hr TSP and construction noise at KTD1a, KTD2a and KER1b in the reporting month.

#### 7.2 **Complaints, Notification of Summons and Prosecution**

- A compliant received on 7th December 2016 was referred from EPD on 15th December 2016 regarding the sand and mud dropped from the vehicle that caused Cheung Yip Street and Shing Cheong dusty. The notification of complaint was received by ET on 27th January 2017.
- 7.2.2 Cumulative complaint log, summaries of complaints, notification of summons and successful prosecutions are presented in Appendix L.

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

: (852)-24508238 1-15 Kwai Fung Crescent, Kwai Fong, Fax : (852)-24508032 Hong Kong.. Email : mcl@fugro.com.hk



#### 8. **IMPLEMENTATION STATUS OF ENVIRONMENTAL MITIGATION MEASURES**

#### 8.1 **Implementation Status**

8.1.1 The Contractor has implemented environmental mitigation measures and requirements as stated in the EIA Reports, the EP and the EM&A Manuals. The implementation status of the mitigation measures during the reporting month is summarized in Appendix J. Status of required submission under the EP during the reporting period is summarized in **Table 8.1**.

Table 8.1 Status of Required Submission under Environmental Permit

| able 6.1 Status of Required Submission under Environmental Fermit |                                                        |                 |  |  |  |
|-------------------------------------------------------------------|--------------------------------------------------------|-----------------|--|--|--|
| EP Condition Submission                                           |                                                        | Submission Date |  |  |  |
| EP-337/2009                                                       |                                                        |                 |  |  |  |
| Condition 2.3                                                     | Management Organization of Main Construction Companies | 18/12/2015      |  |  |  |
| Condition 2.4                                                     | Design Drawing of the Project                          | 18/12/2015      |  |  |  |
| Condition 2.11                                                    | Landscape Mitigation Plan(s)                           | 18/12/2015      |  |  |  |
| Condition 3.3                                                     | Monthly EM&A Report (December 2016)                    | 13/01/2017      |  |  |  |
| EP-339/2009/A                                                     |                                                        |                 |  |  |  |
| Condition 2.4                                                     | Management Organization of Main Construction Companies | 18/12/2015      |  |  |  |
| Condition 2.5                                                     | Design Drawing of the Project                          | 18/12/2015      |  |  |  |
| Condition 3.3                                                     | Monthly EM&A Report (December 2016)                    | 13/01/2017      |  |  |  |
| EP-451/2013                                                       | EP-451/2013                                            |                 |  |  |  |
| Condition 2.3                                                     | Management Organization of Main Construction Companies | 18/12/2015      |  |  |  |
| Condition 2.4                                                     | Design Drawing of the Project                          | 18/12/2015      |  |  |  |
| Condition 2.5                                                     | Landscape Mitigation Plan(s)                           | 18/12/2015      |  |  |  |
| Condition 2.10                                                    | Supplementary Contamination Assessment Report          | 18/12/2015      |  |  |  |
| Condition 3.3                                                     | Baseline Monitoring Report                             | 12/02/2016      |  |  |  |
| Condition 3.4                                                     | Monthly EM&A Report (December 2016)                    | 13/01/2017      |  |  |  |

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

: (852)-24508238 1-15 Kwai Fung Crescent, Kwai Fong, : (852)-24508032 Hong Kong.. Email : mcl@fugro.com.hk



#### 9. **FUTURE KEY ISSUES**

#### 9.1 **Construction Programme for the Next Two Months**

- Temporary utility diversion;
- Implementation of Temporary Traffic Arragement (TTA);
- Construction of Socket H piles:
- Construction of Tunnel structure;
- Construction of guide walls and D-walls; and
- Construction of District Cooling System Works.

#### 9.2 **Key Issues for the Coming Month**

9.2.1 Potential environmental impacts arising from the above construction activities are mainly associated with construction dust, construction noise, water quality, waste management and landscape and visual impact.

#### 9.3 **Monitoring Schedules for the Next Three Months**

9.3.1 The tentative schedules for environmental monitoring in the coming three months are provided in Appendix E.

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong..

g, Tel : (852)-24508238 ent, Kwai Fong, Fax : (852)-24508032 Email : mcl@fugro.com.hk



#### 10. CONCLUSIONS

- 10.1.1 24-hour TSP impact monitoring and construction noise monitoring were carried out in the reporting month, no Action / Limit Level exceedance was recorded during the period.
- 10.1.2 No complaint of air quality was received. Therefore, no impact 1-hour TSP monitoring was conducted in the reporting month.
- 10.1.3 Four environmental site inspections were carried out in January 2017. Recommendations on mitigation measures on air quality, water quality, noise, waste management and landscape and visual impact were given to the Contractor for remediating the deficiencies identified during the site inspections.
- 10.1.4 Four weekly Landscape and Visual Site audits were carried out on 5, 12 18 and 26 January 2017 and two of them, 5 and 18 January 2017 were carried out by a Registered Landscape Architect in the reporting month. The weekly Landscape and Visual Impact reports were counter-signed by IEC as according to the requirement of EM&A Manual (AEIAR-130/2009).
- 10.1.5 Referring to the Contractor's information, no environmental complaint, notification of summons and successful prosecution was received in the reporting month.

#### 10.2 Comment and Recommendations

- 10.2.1 The recommended environmental mitigation measures, as proposed in the EIA reports and EM&A Manuals shall be effectively implemented to minimize the potential environmental impacts from the Project. The EM&A programme would effectively monitor the environmental impacts generated from the construction activities and ensure the proper implementation of mitigation measures.
- 10.2.2 According to the environmental audit performed in the reporting month, the following recommendations were made:

#### Air Quality Impact

- Contractor was reminded to provide adequate watering to reduce dust emission.
- The C&D material shall be properly covered after the excavation is done.
- Open stockpile shall be covered with impermeable sheeting to prevent dust emission.
- Dark smoke was observed in an operating crane. Purifier shall be installed and repairing programme shall be implemented.

### Construction Noise Impact

No specific observation was identified in the reporting month.

#### Water Quality Impact

- Contractor shall provide a good practise to prevent waste water from wheel washing to enter the public drainage. Proper wheel washing area shall be provided.
- Waste water shall be removed.

#### Chemical and Waste Management

Chemical oil shall be stored properly. Drip tray shall be provided.

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

: (852)-24508238 1-15 Kwai Fung Crescent, Kwai Fong, : (852)-24508032 Hong Kong.. Email : mcl@fugro.com.hk



### Landscape and Visual Impact

Open stockpiles shall be covered by unobtrusive sheeting to prevent dust and dirt spreading to adjacent landscape areas and vegetation, and to create a neat and tidy visual appearance.

### **General Condition**

No specific observation was identified in the reporting month.

#### Permit / Licenses


No specific observation was identified in the reporting month.

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong.. : (852)-24508238 : (852)-24508032 : mcl@fugro.com.hk Fax Email



Figure 1

**Project General Layout** 

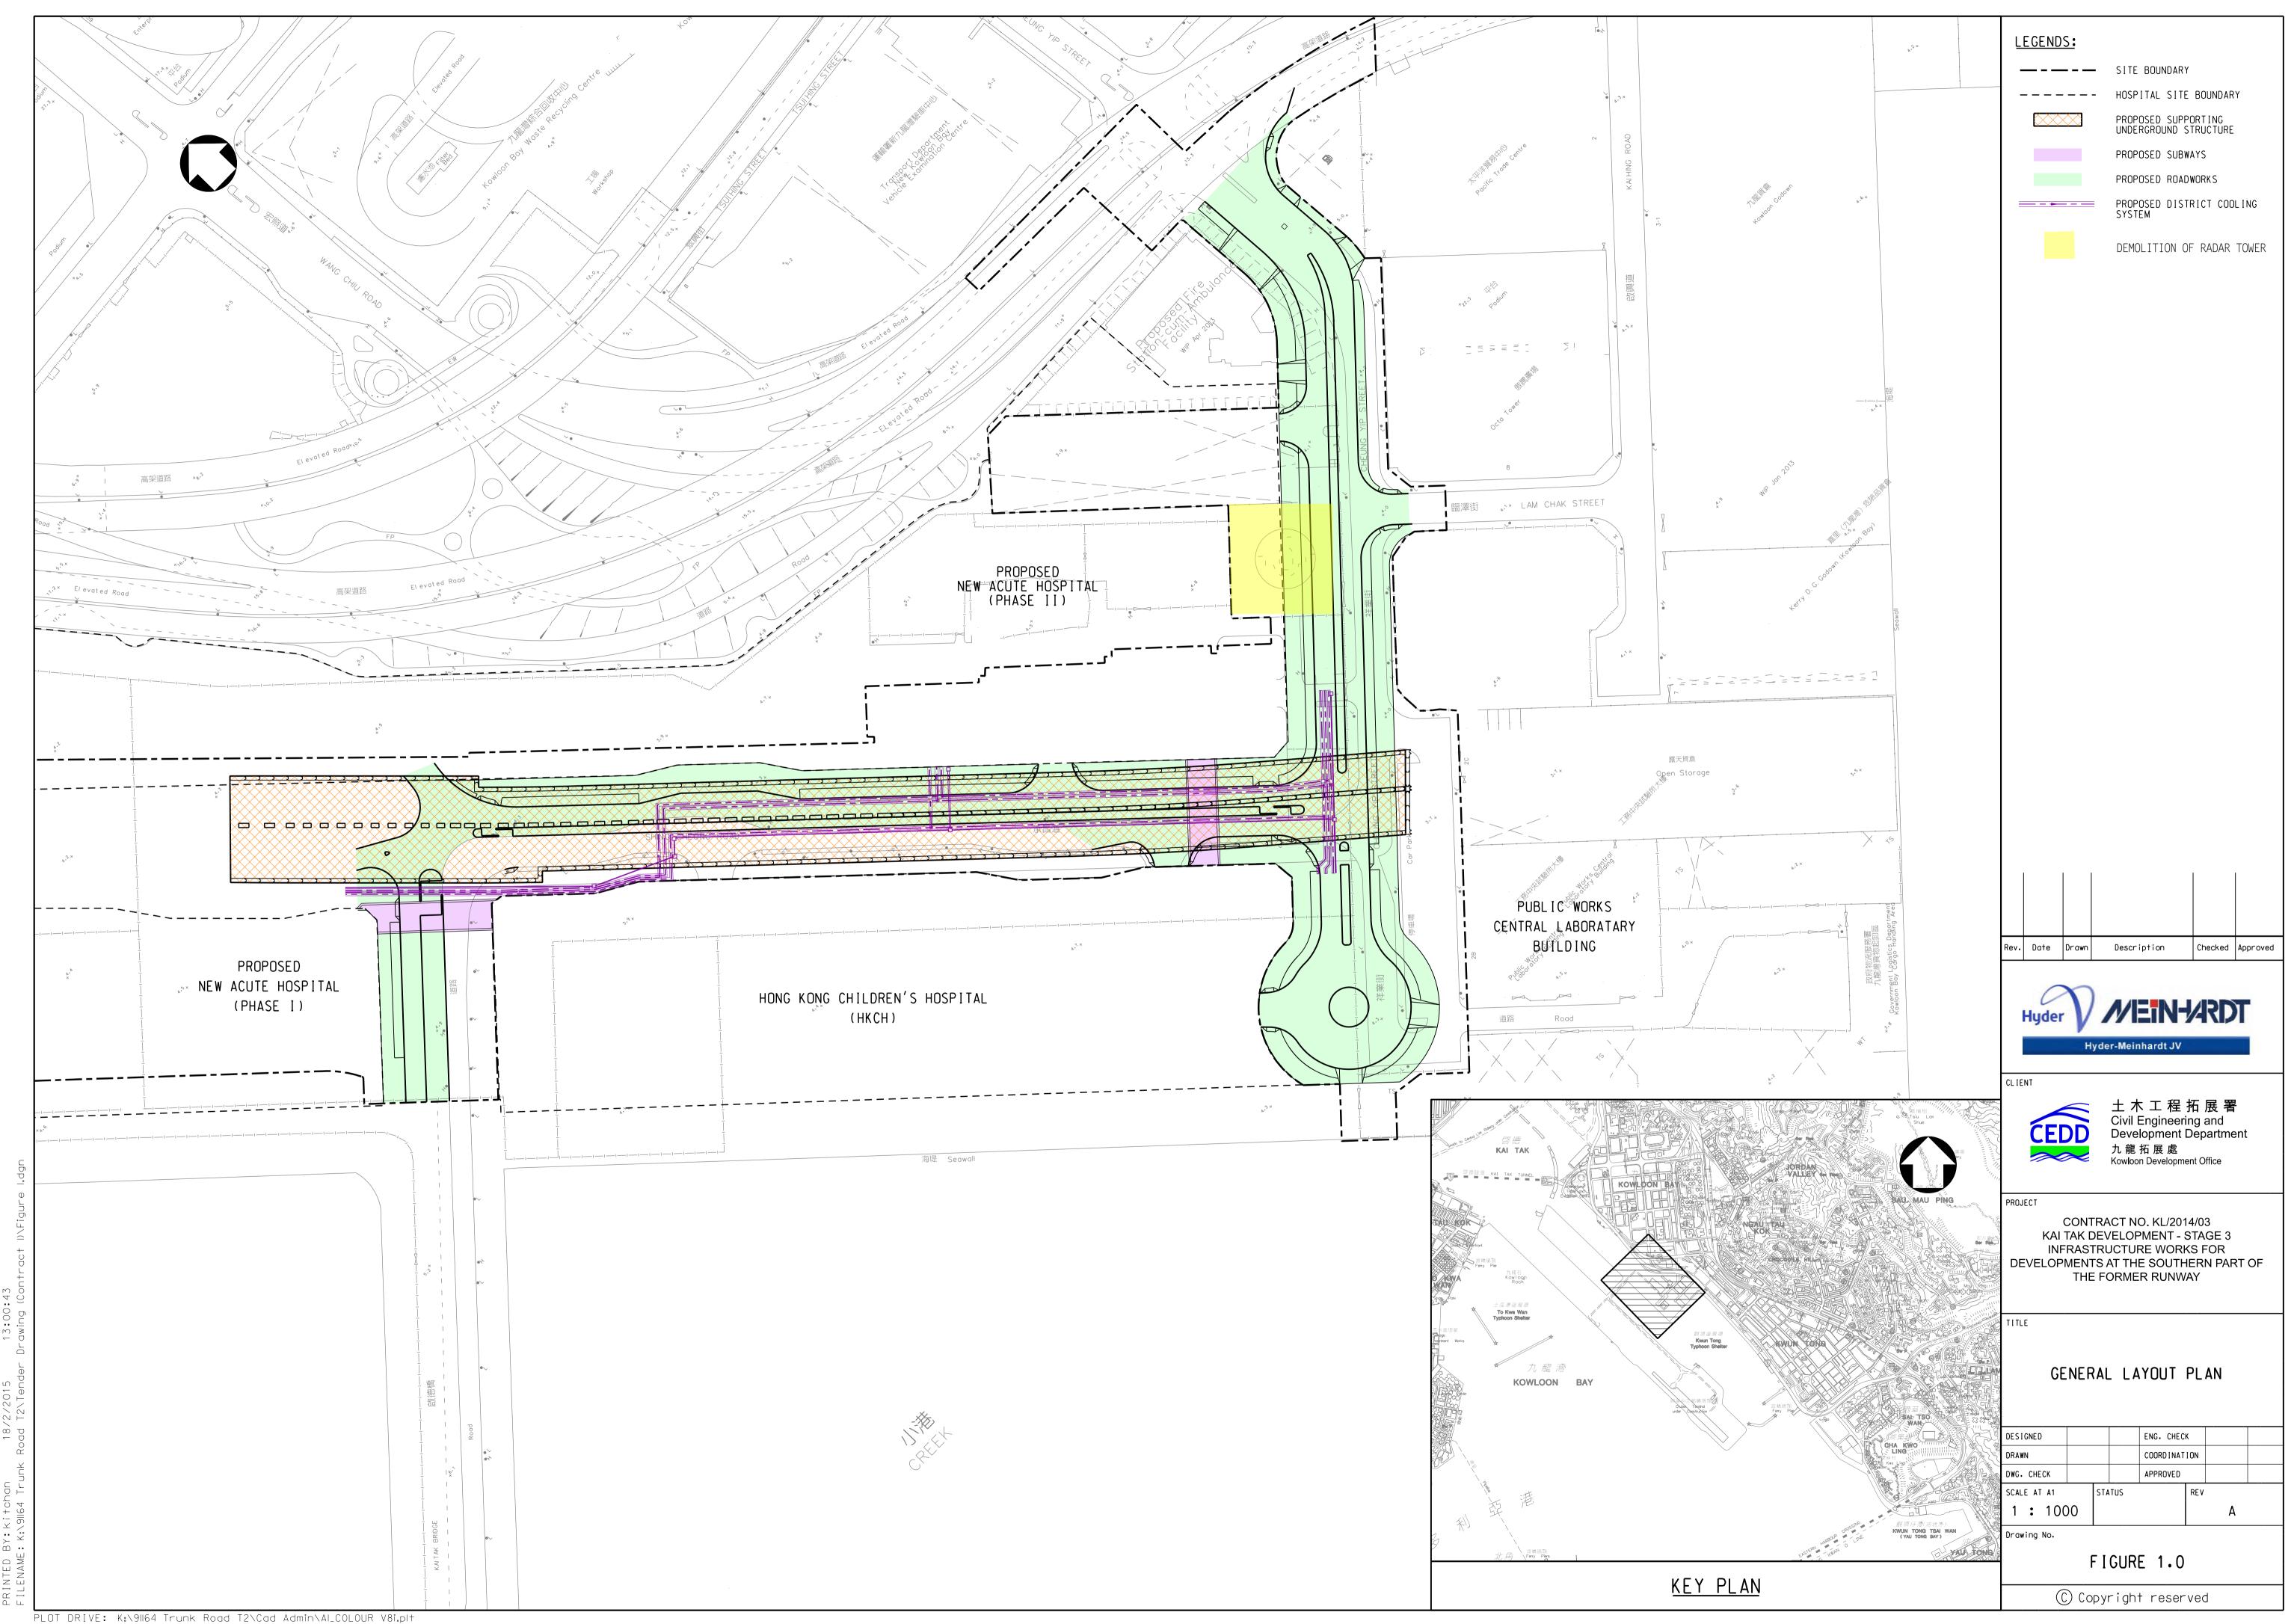

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong.. Tel : (852)-24508238 Fax : (852)-24508032 Email : mcl@fugro.com.hk




Figure 2

**Air and Noise Monitoring Locations** 

土木工程拓展署
Civil Engineering and
Development Department
九龍拓展處
Kowloon Development Office

# AGREEMENT NO. CE 38/2008(HY) KAI TAK DEVELOPMENT - TRUNK ROAD T2 AND INFRASTRUCTURE AT SOUTH APRON - INVESTIGATION, DESIGN AND CONSTRUCTION




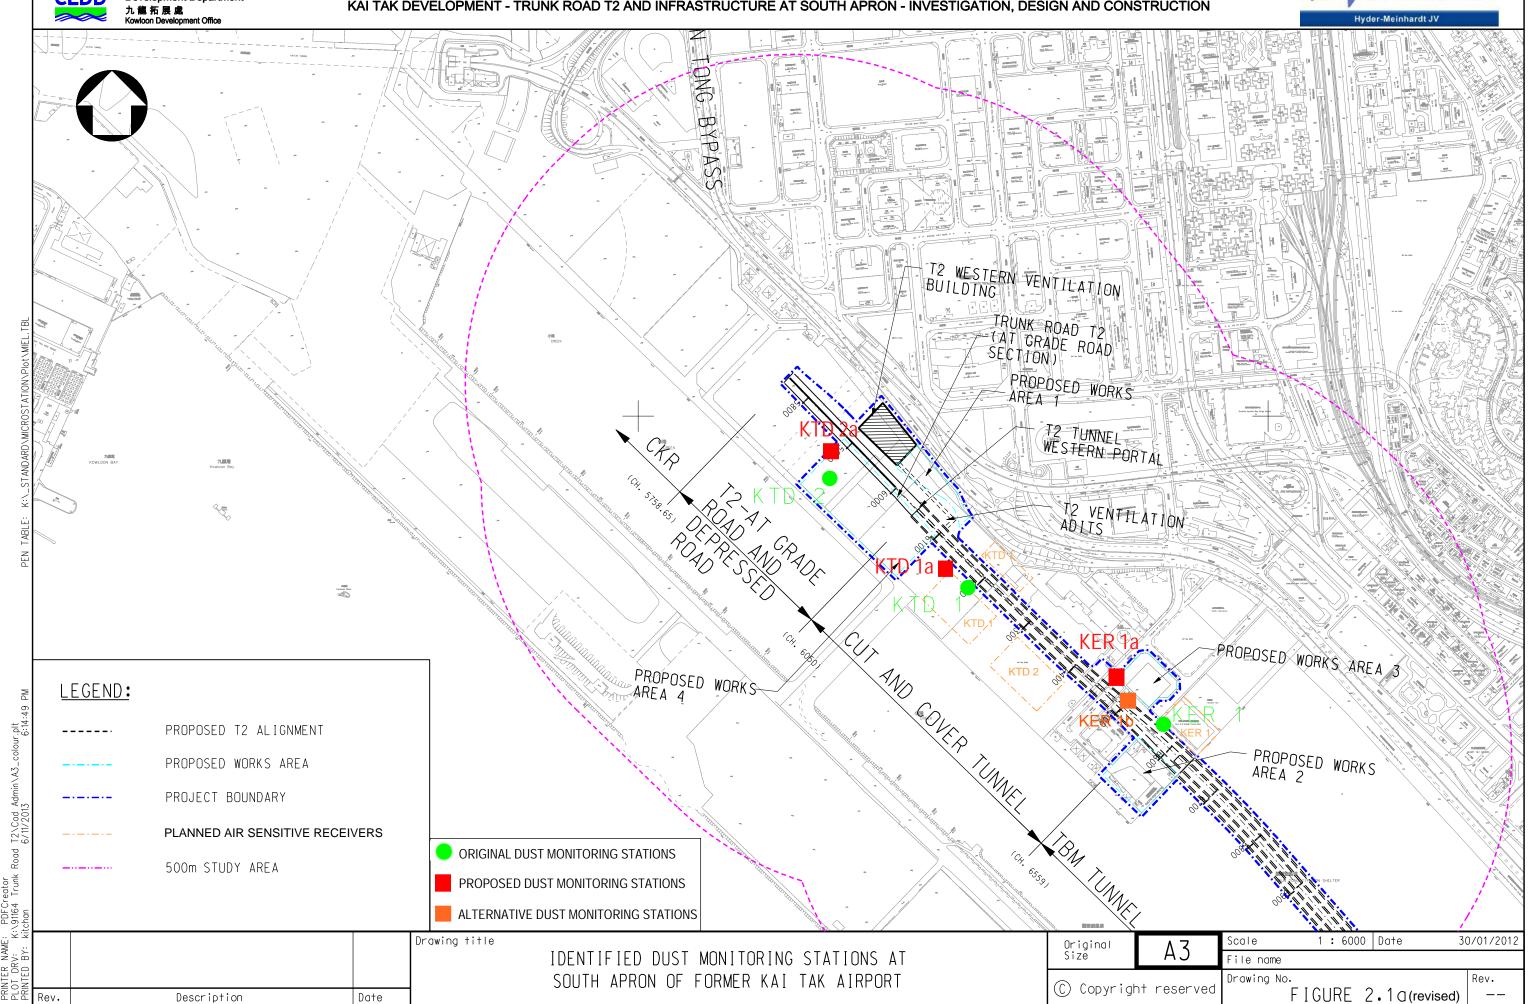

土木工程拓展署
Civil Engineering and
Development Department
九龍拓展處
Kowloon Development Office

# AGREEMENT NO. CE 38/2008(HY) KAI TAK DEVELOPMENT - TRUNK ROAD T2 AND INFRASTRUCTURE AT SOUTH APRON - INVESTIGATION, DESIGN AND CONSTRUCTION



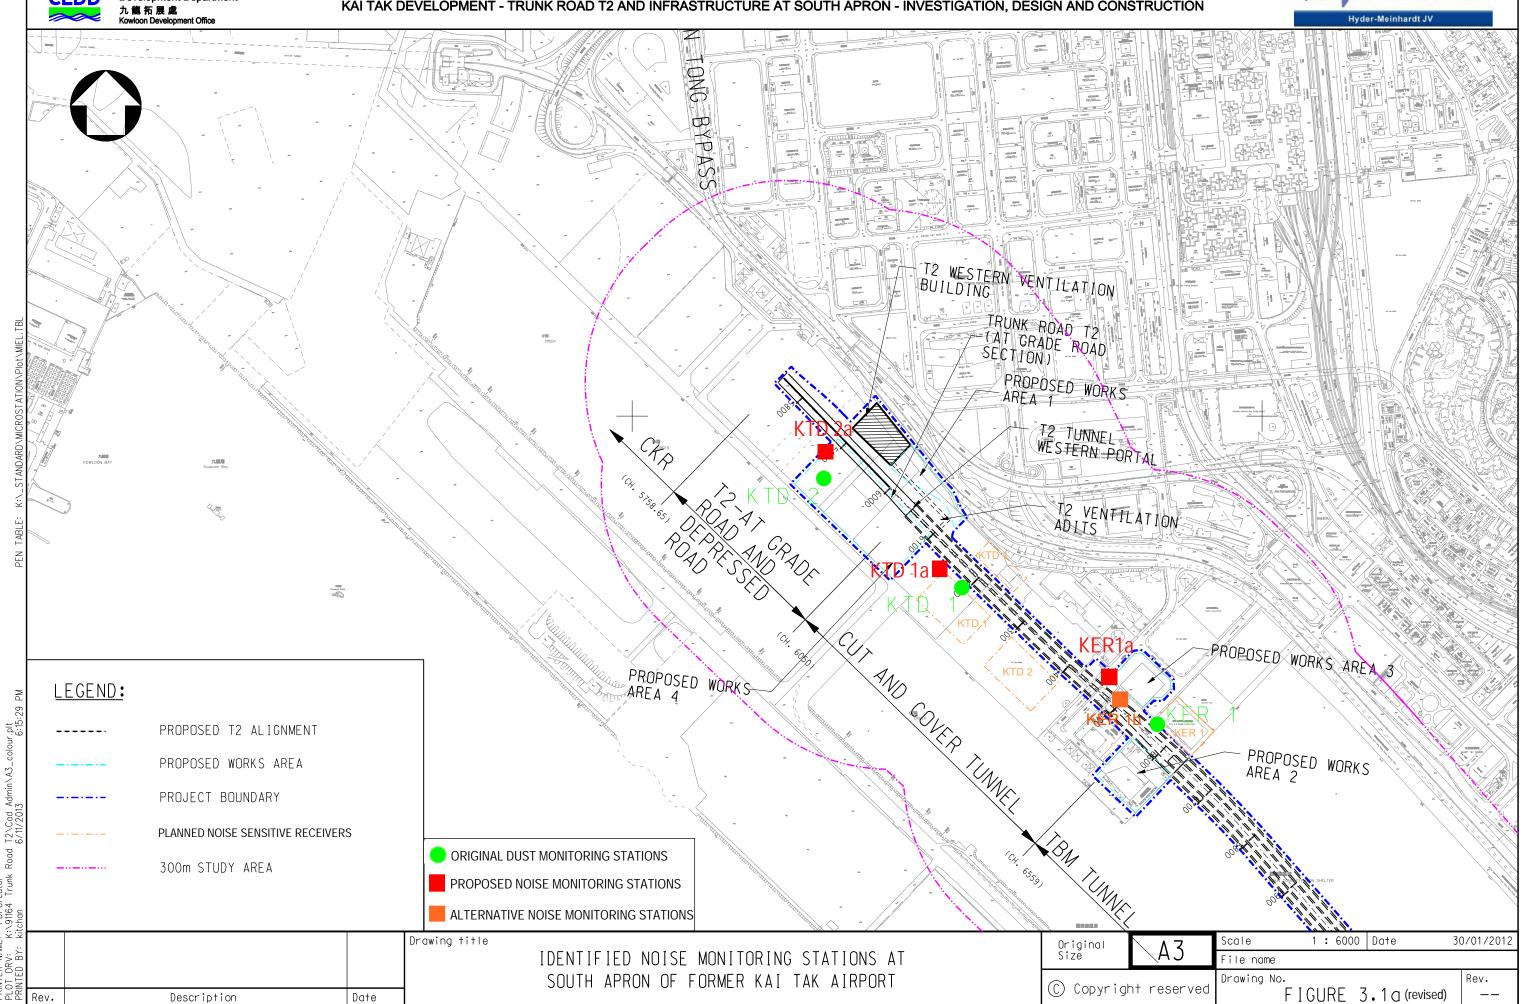

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong.. : (852)-24508238 : (852)-24508032 : mcl@fugro.com.hk Tel Fax Email



Appendix A

**Construction Programme** 

#### 土木工程拓展署 Civil Engineering and Development Department KL/2014/03 Kai Tak Development - Stage 3 Infrastructure Works for Developments at the Southern Part of the Former Runway Hyder / MEINHARDT CEDD 九龍拓展處 Dur KL/2014/03-Stage 3 Infrastructure Works for Developments at the Southern Part of the Form 895 04-Jan-16 A **Project Key Dates** 895 01-Feb-16 A 13-Jun-19 **General Submission** 09-Jun-16 A 16-Feb-1' **Programming / Reporting** 48 09-Jun-16 A Works Programme 16-Feb-17 K-PA-GSP-4300 | Acceptance of the Works Programme Acceptance of the Works Programme 28 48 09-Jun-16 A 16-Feb-17 89 11-May-16 A 29-Mar-1 **Condition Survey & Construction Impact Assessment** K-DR-PRE-1190 Condition survey at HKCH 09-Mar-17 15-Mar-17 7 K-DR-PRE-1195 Submit condition survey report at HKCH 14 14 16-Mar-17 29-Mar-17 Approval of the CIA report submissions for Zone 1 K-DR-PRE-1230 | Approval of the CIA report submissions for Zone 1 28 14-Sep-16 A 27-Jan-17 Revise & resubmit CIA Report for Zone 2 to 4 K-DR-PRE-1320 Revise & resubmit CIA Report for Zone 2 to 4 56 29-Jan-17 30 11-May-16 A Approval of the CIA report submissions K-DR-PRE-1330 | Approval of the CIA report submissions 28 30-Jan-17 26-Feb-17 28 24-Mar-1 Alternative Design Submission and Approval 12-Jul-16 A Package B03: SUS Tunnel box from (CH6+150 to CH6+220) 14-Jan-17 12-Jul-16 A K-PA-ADS-1030 Engineer's review and approval 56 12-Jul-16 A 14-Jan-17 Engineer's review and approva 15 Package B05: SUS D-wall from (CH6+291 to CH6+568) 13-Jul-16 A 11-Jan-17 K-PA-ADS-1550 Engineer's review and approval 12 13-Jul-16 A Engineer's review and approval 11-Jan-17 Package B06: SUS Top & base slab and intermediate wall from (CH6+220 to CH6+568) 84 12-Aug-16 A 24-Mar-17 K-PA-ADS-1420 | Revise & resubmit DDA drawing (SUS Top & Base slab and Intermediate wall from CH6+220 to CH6+568) 28 28 12-Aug-16 A 27-Jan-17 K-PA-ADS-1430 Engineer's review and approval 28-Jan-17 24-Mar-17 Major Temporary Works Design 75 02-Nov-16 A 15-Mar-1 ■ ELS design for construction of SUS from CH6+291 to K-PA-GSP-6835 | ELS design for construction of SUS from CH6+291 to CH6+568 in Zone 4 - horizontal members 56 48 16-Nov-16 A 16-Feb-17 Formwork and falsework design for construction of tunnel box structure K-PA-GSP-6880 Formwork and falsework design for construction of tunnel box structure 56 10 02-Nov-16 A 09-Jan-17 K-PA-GSP-8860 Pumping Test for SUS Cofferdam in Zone 4 50 21-Jan-17 11-Mar-17 Temporary support for existing 132kV CLP cable across SUS at CH6+560 K-PA-GSP-9100 | Temporary support for existing 132kV CLP cable across SUS at CH6+560 35 15 16-Nov-16 A 14-Jan-17 K-PA-GSP-9250 ELS design for construction of existing seawall 35 09-Feb-17 15-Mar-17 35 ■ Design review for revised construction sequence of Ventilition Adit 2 for Zone 1 CH6+185 to C K-PA-GSP-9260 Design review for revised construction sequence of Ventilition Adit 2 for Zone 1 CH6+185 to CH6+220 15-Jan-17 16 26-Nov-16 A Major Construction Works Method Statement 06-Sep-16 A 02-Mar-1 Engineer's comments and approval for Method statement of Excavation and ELS for SUS Construction for Zone 1 K-PA-GSP-7145 Engineer's comments and approval for Method statement of Excavation and ELS for SUS Construction for Zone 28 2 06-Sep-16 A 01-Jan-17 Method statement of Excavation and ELS for SUS Construction for Zone K-PA-GSP-7150 Method statement of Excavation and ELS for SUS Construction for Zone 3 28 06-Jan-17 02-Feb-17 K-PA-GSP-7155 Engineer's comments and approval 28 03-Feb-17 02-Mar-17 28 Engineer's comments and approval K-PA-GSP-7316 Engineer's comments and approval 28 7 28-Oct-16 A 06-Jan-17 Engineer's comments and approval K-PA-GSP-7405 Engineer's comments and approval 28 12 29-Oct-16 A 11-Jan-17 Method statement for Erection and Removal of the temporary vehicular and pedestrian access for K-PA-GSP-7490 Method statement for Erection and Removal of the temporary vehicular and pedestrian access for HKCH 28 14-Jan-17 15 15-Dec-16 A Engineer's comments and approval K-PA-GSP-7495 Engineer's comments and approval 28 28 15-Jan-17 11-Feb-17 ■ Method statement for Erection and Removal of the temporary support for the utilities Method statement for Erection and Removal of the temporary support for the utilities 23-Jan-17 K-PA-GSP-7500 28 24 26-Nov-16 A



K-PA-GSP-7505 | Engineer's comments and approval



3 MRP Jan 2017- Mar 2017

24-Jan-17

20-Feb-17

28

28

Project ID :13 3MPR Jan - Mar 17 Layout : KL201403 WP3 3MRP Page 1 of 8

| 3 Months Rolling Programme |              |         |          |  |  |  |
|----------------------------|--------------|---------|----------|--|--|--|
| Date                       | Revision     | Checked | Approved |  |  |  |
| 31-Dec-16                  | Jan 17 - Mar |         |          |  |  |  |

Engineer's comments and approval



# KL/2014/03 Kai Tak Development - Stage 3 Infrastructure Works for Developments at the Southern Part of the Former Runway



| Hyder - Meinhardt JV                              |                                                                                                    |             |            |                            |                        |              |                                                               | 九龍 社 展 處<br>Kowloon Development Office    |
|---------------------------------------------------|----------------------------------------------------------------------------------------------------|-------------|------------|----------------------------|------------------------|--------------|---------------------------------------------------------------|-------------------------------------------|
| y ID Activit                                      | y Name                                                                                             | Orig<br>Dur | Rem<br>Dur | Start                      | Finish                 | mber<br>8    | January February 19 20                                        | March<br>21                               |
|                                                   |                                                                                                    |             |            |                            |                        | 18 2         |                                                               |                                           |
| K-PA-GSP-9270 Method                              | od Statement for revised construction sequence of Ventilition Adit 2 for Zone 1 CH6+185 to CH6+220 | 18          | 18         | 31-Dec-16                  | 17-Jan-17              |              | Method Statement for revised construction sequ                | ence of Ventilition Adit 2 for Zone 1 CH6 |
| K-PA-GSP-9280 Engin                               | eer's comments and approval                                                                        | 28          | 28         | 18-Jan-17                  | 14-Feb-17              | <del> </del> |                                                               | comments and approval                     |
| E Helle D:                                        | · w 1                                                                                              | 183         | 00         | 05 San 16 A                | 06-May-17              |              |                                                               |                                           |
| Temporary Utility Div                             |                                                                                                    |             |            | 05-Sep-16 A                |                        |              |                                                               |                                           |
| Temporary Diversion for<br>Laying Proposed (Fresh |                                                                                                    | 72          |            | 31-Oct-16 A<br>31-Oct-16 A | 25-Jan-17<br>25-Jan-17 | <b></b>      |                                                               |                                           |
|                                                   | th excavation for DN600 MS & DI fresh watermain at subway B & zone 1                               | 15          |            | 31-Oct-16 A                | 11-Jan-17              |              | Trench excavation for DN600 MS & DI fresh waterma             | in at subway B & zone 1                   |
| K-PA-TUD-1120 Layin                               | ng DN600 MS & DI fresh watermain at subway B & zone 1                                              | 20          | 11         | 21-Nov-16 A                | 13-Jan-17              |              | Laying DN600 MS & DI fresh watermain at subwa                 | y B & zone 1                              |
| K-PA-TUD-1150 DN60                                | 00 DI connected (X1 and X2)                                                                        | 0           | 0          |                            | 25-Jan-17              |              | ◆ DN600 DI connected (X1 and X2)                              |                                           |
| K-PA-TUD-1170 DN60                                | 00 DI connected (X3)                                                                               | 0           | 0          |                            | 25-Jan-17              |              | ◆ DN600 DI connected (X3)                                     |                                           |
| K-PA-TUD-2050 DN4:                                |                                                                                                    | 0           | 0          |                            | 25-Jan-17              |              | ◆ DN450 DI connected (X4)                                     |                                           |
|                                                   |                                                                                                    | U           |            |                            |                        |              |                                                               |                                           |
| Laying Proposed (Salt) \                          | Natermain                                                                                          | 72          |            | 31-Oct-16 A                | 25-Jan-17              |              |                                                               |                                           |
| K-PA-TUD-1200 Trenc                               | ch excavation for DN300 MS salt watermain at subway B & zone 1                                     | 18          | 5          | 31-Oct-16 A                | 11-Jan-17              |              | Trench excavation for DN300 MS salt watermain at su           | bway B & zone I                           |
| K-PA-TUD-1220 Layin                               | ng DN300 MS salt watermain at subway B & zone 1                                                    | 20          | 5          | 21-Nov-16 A                | 13-Jan-17              |              | Laying DN300 MS salt watermain at subway B & z                | one 1                                     |
| K-PA-TUD-1250 Conne                               | ection to DN300 DI (Y1)                                                                            | 0           | 0          |                            | 25-Jan-17              |              | ◆ Connection to DN300 DI (Y1)                                 |                                           |
| K-PA-TUD-2250 Conne                               | ection to DN300 DI (Y2 and Y3)                                                                     | 0           | 0          |                            | 25-Jan-17              | <u> </u>     | ◆ Connection to DN300 DI (Y2 and Y                            | 3)                                        |
| Temporary Diversion for                           | r Drainage Works                                                                                   | 183         | 99         | 05-Sep-16 A                | 06-May-17              |              |                                                               |                                           |
|                                                   | rsion of 2100 storm drain at zone 4                                                                | 60          |            | 05-Sep-16 A                | 27-Jan-17              |              | Diversion of 2100 storm drain at z                            | cone 4                                    |
| K-PA-TUD-2500 Excav                               | vation and laying of DN600 MS pipe and manhole (N-CP-1) at zone 4 for HKCH connection              | 25          | 25         | 21-Mar-17                  | 22-Apr-17              |              |                                                               |                                           |
| K-PA-TUD-2600 Excav                               | vation and laying of DN300 MS pipe and manhole (FMH23-15D) at zone 4                               | 70          | 70         | 08-Feb-17                  | 06-May-17              |              |                                                               |                                           |
| Tamparary Divarsion for                           | r CLP Cable at CH6+560                                                                             | 84          | 21         | 07-Nov-16 A                | 13-Apr-17              |              |                                                               |                                           |
|                                                   | ch excavation area 5 for cable diversion by CLP at zone 4                                          | 21          | 3          | 07-Nov-16 A                | 04-Jan-17              |              | Trench excavation area 5 for cable diversion by CLP at zone 4 |                                           |
| K-PA-TUD-3450 Erect                               | ion of traffic decking and divert traffic back to orignal position                                 | 12          | 12         | 05-Jan-17                  | 18-Jan-17              |              | Erection of traffic decking and divert traffic b              | ack to orignal position                   |
| K-PA-TIID 3550 Hand                               | over area 3 to CLP cable diversion at zone 4                                                       | 0           | 0          |                            | 18-Jan-17              | -            | ◆ Handover area 3 to CLP cable diversion at zo                | ne 4                                      |
|                                                   |                                                                                                    | U           | 0          |                            |                        |              |                                                               |                                           |
| K-PA-TUD-3555 Trend                               | ch excavation area 3 for cable diversion by CLP at zone 4                                          | 27          | 27         | 19-Jan-17                  | 22-Feb-17              |              |                                                               |                                           |
| K-PA-TUD-3560 Hand                                | over area 4 to CLP cable diversion at zone 4                                                       | 0           | 0          |                            | 22-Feb-17              |              |                                                               | Handover area 4 to CLP cable diversion    |
| K-PA-TUD-3700 Trend                               | ch excavation area 4 for cable diversion and CLP cable slewing works by CLP                        | 42          | 42         | 23-Feb-17                  | 13-Apr-17              |              | •                                                             |                                           |
| K-PA-TUD-3750 Fabri                               | cation and Erection temporary support to utilities at zone 4                                       | 14          | 14         | 23-Feb-17                  | 10-Mar-17              |              | •                                                             | Fabrication and Ere                       |
| Temporary Diversion for                           | r Sewage Rising Main                                                                               | 62          | 62         | 04-Feb-17                  | 21-Apr-17              | 1            |                                                               |                                           |
|                                                   | truction of 3xDN350 sewage rising main and manhole                                                 | 28          | 28         |                            | 21-Apr-17              |              |                                                               |                                           |
| K-PA-TUD-1600 Const                               | truction of DN750 sewage pipe and manhole - stage 1                                                | 20          | 20         | 04-Feb-17                  | 27-Feb-17              |              |                                                               | Construction of DN750 sewage p            |
| K-PA-TUD-2750 Const                               | truction of DN450 sewerage pipe at zone 2 - stage 1                                                | 48          | 48         | 17-Feb-17                  | 18-Apr-17              |              |                                                               |                                           |
| Tamparary Divarsian for                           | r Telecommunication Cable                                                                          | 18          | 18         | 04-Jan-17                  | 24-Jan-17              | <del> </del> |                                                               |                                           |
| -                                                 | rsion of Fibre cable (PCCW)                                                                        | 18          | 18         |                            | 24-Jan-17<br>24-Jan-17 |              | Diversion of Fibre cable (PCCW)                               |                                           |
|                                                   | rsion of Fibre optical cable (HGC)                                                                 | 18          | 18         |                            | 24-Jan-17              | -            | ` ´ ´                                                         |                                           |
|                                                   |                                                                                                    |             |            |                            |                        |              |                                                               | ·                                         |
| Temporary Traffic M                               |                                                                                                    |             |            | 31-Jul-16 A                | 21-Apr-17              |              |                                                               |                                           |
| Temp Traffic Arrangeme                            | ent Schamas                                                                                        | 265         | 110        | 31-Jul-16 A                | 21-Apr-17              | 1            | • •                                                           |                                           |



| • | • | Milestone                 |
|---|---|---------------------------|
|   |   | Critical Activity         |
|   |   | Non-Critical Activity     |
|   |   | Remaining Level of Effort |
|   |   | Actual Work               |
|   |   |                           |

3 MRP Jan 2017- Mar 2017

Page 2 of 8

Layout: KL201403 WP3 3MRP

| Page 2 | of 8 |
|--------|------|

Project ID:13 3MPR Jan - Mar 17

| L | 3 Months Rolling Programme |              |         |          |  |  |  |
|---|----------------------------|--------------|---------|----------|--|--|--|
|   | Date                       | Revision     | Checked | Approved |  |  |  |
|   | 31-Dec-16                  | Jan 17 - Mar |         |          |  |  |  |



# KL/2014/03 Kai Tak Development - Stage 3 Infrastructure Works for Developments at the Southern Part of the Former Runway



| Hyder - Meinl     |                      |                                                                            |             |            |             |                        | 7/- Ne 7-1 (re. de Tal (re. de |
|-------------------|----------------------|----------------------------------------------------------------------------|-------------|------------|-------------|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| vity ID           | Activity Name        |                                                                            | Orig<br>Dur | Rem<br>Dur | Start       | Finish                 | mber         January         February         March           8         19         20         21                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| K-PA-TTA-8100     | Submission and ap    | proval of TTA schemes-TTA stage 2 for D-wall W/B at Zone 2                 | 90          | 60         | 31-Jul-16 A | 28-Feb-17              | 18   25   01   08   15   22   29   05   12   19   26   05   12   19   26   26   26   26   26   26   26   2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|                   |                      | •                                                                          |             |            |             |                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| K-PA-TTA-8900     | Submission and ap    | proval of TTA schemes-TTA stage 3 for re-construction of Cheung Yip Street | 90          | 90         | 22-Jan-17   | 21-Apr-17              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Interfacing Wor   |                      |                                                                            | 89          | 90         | 28-Nov-16 A | 30-Mar-17              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| K-PA-INT-6020     | Handover Area A      | or Towngas Lead-in and Sewerage Connection Works by CSSOJV                 | 28          | 0          | 28-Nov-16 A | 31-Dec-16              | Handover Area A for Towngas Lead-in and Sewerage Connection Works by CSSOJV                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| K-PA-INT-6030     | Handover Area B1     | for Telecom Lead-in Works by HKT and HGC                                   | 14          | 14         | 17-Mar-17   | 30-Mar-17              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| K-PA-INT-6040     | Handover Area B2     | for Telecom Lead-in Works by HKT and HGC                                   | 15          | 15         | 10-Feb-17   | 24-Feb-17              | Handover Area B2 for Telecom Lead-in V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|                   |                      | ·                                                                          |             |            |             |                        | Handover Area B3 for Towngas Lead-in and Sev                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| K-PA-INT-6050     | Handover Area B3     | for Towngas Lead-in and Sewerage Works by HKT and HGC                      | 36          | 36         | 15-Jan-17   | 19-Feb-17              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| K-PA-INT-6060     | Handover Area C1     | for CLP's Cable Lead-in Works by HKT and HGC                               | 36          | 16         | 15-Dec-16 A | 15-Jan-17              | Handover Area C1 for CLP's Cable Lead-in Works by HKT and HGC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Materials Procu   | roment (Major        | Matariale)                                                                 | 900         | 613        | 01-Feb-16 A | 04-Sep-18              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                   |                      |                                                                            | 260         |            |             | *                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| ELS struct / wal  |                      |                                                                            | 360         |            | 10-Jun-16 A | 26-Oct-17              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| K-PA-MP-1150      | Manufacturing & o    | lelivery to site                                                           | 360         | 300        | 10-Jun-16 A | 26-Oct-17              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Steel H-Pile      |                      |                                                                            | 420         | 160        | 01-Feb-16 A | 08-Jun-17              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| K-PA-MP-1250      | Manufacturing & o    | lelivery to site                                                           | 420         | 160        | 01-Feb-16 A | 08-Jun-17              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Chilled Water P   | Pines - DCS          |                                                                            | 580         | 580        | 02-Feb-17   | 04-Sep-18              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                   | Order of chilled w   | ater pipes                                                                 | 0           | 0          | 02-Feb-17   |                        | ◆ Order of chilled water pipes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| K-PA-MP-1350      | Manufacturing & o    | lalivary to gita                                                           | 580         | 580        | 02-Feb-17   | 04-Sep-18              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| K-FA-WIF-1330     | Manufacturing & C    | tenvery to site                                                            | 360         | 380        | 02-160-17   | 04-sep-18              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Prelimiaries      |                      |                                                                            | 1190        | 895        | 11-Mar-16 A | 13-Jun-19              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| K-DR-PRE-1800     | Submission of time   | e-lapsed photographs and video                                             | 1190        | 895        | 11-Mar-16 A | 13-Jun-19              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Barge Loading 1   | Facilities           |                                                                            | 21          | 21         | 01-Feb-17   | 25-Feb-17              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                   | Setup of temporary   | barging point                                                              | 21          | 21         | 01-Feb-17   | 24-Feb-17              | Setup of temporary barging point                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| K-DR-PRE-1480     | Operation of the b   | arging point                                                               | 0           | 0          | 25-Feb-17   |                        | ◆ Operation of the barging point                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Instrumentation   | and Monitorin        | α                                                                          | 414         | 235        | 19-Jul-16 A | 22-Aug-17              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Eastbound Instr   |                      | •                                                                          | 16          |            | 08-Mar-17   | 25-Mar-17              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Inclinometer (INC |                      | wiomtoring                                                                 | 16          |            | 08-Mar-17   | 25-Mar-17              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                   | Installation of INC  | at Zone 3                                                                  | 15          |            | 09-Mar-17   | 25-Mar-17<br>25-Mar-17 | Ins                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| V IM INIC 1240    | Installation of INC  | at Zana A                                                                  | 1.5         | 1.5        | 00 Mar 17   | 24 Man 17              | Insta                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| K-IM-INC-1340     | Installation of INC  | at Zone 4                                                                  | 15          | 13         | 08-Mar-17   | 24-Mar-17              | THOU THOU                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Westbound Insti   | rumentation and      | Monitoring                                                                 | 222         |            | 19-Jul-16 A | 30-Mar-17              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| _Extensomter (EXT |                      |                                                                            | 15          |            | 14-Feb-17   | 02-Mar-17              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| K-IM-EXT-1370     | Installation of EXT  | Tat Zone 3                                                                 | 15          | 15         | 14-Feb-17   | 02-Mar-17              | Installation of EXT at Zone 3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Piezometer/Standp | nine (P <b>7R</b> )  |                                                                            | 179         | 30         | 19-Jul-16 A | 08-Feb-17              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                   | Installation of PZR  | at Zone 2                                                                  | 10          |            | 25-Jan-17   | 08-Feb-17              | Installation of PZR at Zone 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| V IM DZD 1270     | Installation of PZR  | at Zana 2                                                                  | 40          | 10         | 05-Aug-16 A | 12-Jan-17              | Installation of PZR at Zone 3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| K-IIVI-FZK-13/U   | Ilistaliation of FZN | at Zone 5                                                                  | 40          | 10         | 03-Aug-10 A | 12-Jaii-1/             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| K-IM-PZR-1380     | Installation of PZR  | at Zone 4                                                                  | 40          | 10         | 19-Jul-16 A | 12-Jan-17              | Installation of PZR at Zone 4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Inclinometer (INC | C)                   |                                                                            | 29          | 29         | 25-Feb-17   | 30-Mar-17              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                   | Installation of INC  | at Zone 3                                                                  | 10          |            | 25-Feb-17   | 08-Mar-17              | Installation of INC at Zon                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| K-IM-INC-1380     | Installation of INC  | at Zone 4                                                                  | 10          | 10         | 20-Mar-17   | 30-Mar-17              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                   |                      |                                                                            |             |            |             |                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Crack Meters      | Y . 11 .: 0.5        | I M. A. WOOD                                                               | 10          |            | 16-Mar-17   | 25-Mar-17              | Incl                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| K-IM-CRM-1010     | Installation of Crac | ck Meters at HKCH                                                          | 10          | 10         | 16-Mar-17   | 25-Mar-17              | Inst                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|                   | !                    |                                                                            |             |            |             | 1                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                   |                      | ▲ Milestone                                                                |             |            |             |                        | 3 Months Rolling Programme                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

| • • | Milestone                 |
|-----|---------------------------|
|     | Critical Activity         |
|     | Non-Critical Activity     |
|     | Remaining Level of Effort |
|     | Actual Work               |
|     |                           |

3 MRP Jan 2017- Mar 2017

Page 3 of 8

Project ID :13 3MPR Jan - Mar 17 Layout : KL201403 WP3 3MRP Page 3 of 8

| 3 Wonths Rolling Programme |              |         |          |  |  |
|----------------------------|--------------|---------|----------|--|--|
| Date                       | Revision     | Checked | Approved |  |  |
| 31-Dec-16                  | Jan 17 - Mar |         |          |  |  |

#### 土木工程拓展署 Civil Engineering and Development Department KL/2014/03 Kai Tak Development - Stage 3 Infrastructure Works for Developments at the Southern Part of the Former Runway Hyder / MEINHARDT CEDD 九龍拓展處 Orig Dur Dur **Tilt Monitoring Tile Plates** 180 03-Aug-16 A K-IM-TMT-1000 Tilt Monitoring near PWCL 310 28-Jun-17 K-IM-TMT-1020 Tilt Monitoring near HKCH 22-Aug-17 160 16-Mar-17 33 03-Mar-17 11-Apr-1 Section 1 of the Works-Remainder of the Works 33 03-Mar-17 11-Apr-17 **Roadwork and Drainage Works** 03-Mar-17 11-Apr-1 **Road D4-4 (Cheung Yip Street)** Drainage Works (CH100 to CH200) 33 33 03-Mar-17 11-Apr-17 K-01-RWS-2100 Excavation of Drainage Pipe and Manhole (M101 to M105) 03-Mar-17 11-Mar-17 8 8 K-01-RWS-2110 Laying Drainage Pipe and Construction Manhole (M101 to M105) 25 25 13-Mar-17 11-Apr-17 113 15-Oct-16 A 23-May-17 Section 1A of the Works -Construction of Supporting Underground Structure (Alternative Design) SUS and Ventilation Adits from CH6+150 to CH6+220 in Zone 1 78 17-Dec-16 A 06-Apr-17 25 19-Dec-16 A **Construction of Socketed H-Pile** K-1A-SV1-3400 Trimming Pilehead at Cut-off Level 25 19-Dec-16 A 40 02-Feb-17 11-Jan-1 Stage 2 - Installation of Dewatering Well in VA2 of Zone K-1A-SV1-4210 Stage 2 - Installation of Dewatering Well in VA2 of Zone 1 15 04-Jan-17 A 0 27-Dec-16 A ■ Stage 2 - Pumping Test for VA2 in Zone K-1A-SV1-4220 Stage 2 - Pumping Test for VA2 in Zone 1 06-Jan-17 11-Jan-17 06-Apr-1 **Construction of Tunnel Box Structure** SUS Bay 1 (Ch6150-Ch6167.5) 05-Apr-17 77 31-Dec-16 A Excavation to Foundation Level for VA2 K-1A-SV1-8040 Excavation to Foundation Level for VA2 10-Jan-17 8 31-Dec-16 A Modify the Dewatering Well and Casting Blinding Layer for VA2 K-1A-SV1-8050 Modify the Dewatering Well and Casting Blinding Layer for VA2 12-Jan-17 14-Jan-17 Waterproofing Works for VA2 K-1A-SV1-8060 Waterproofing Works for VA2 5 16-Jan-17 20-Jan-17 Construction of Base Slab for VA2 (-18.0mPD) K-1A-SV1-8070 | Construction of Base Slab for VA2 (-18.0mPD) 10 10 21-Jan-17 04-Feb-17 Removal of Strut SV1A K-1A-SV1-8100 Removal of Strut SV1A 06-Feb-17 07-Feb-17 Construction of Base Slab VA1 and K-1A-SV1-8140 | Construction of Base Slab VA1 and VA3 (-13.9 mPD) 08-Feb-17 02-Mar-17 20 20 Removal of Strut S5 K-1A-SV1-8170 Removal of Strut S5 5 03-Mar-17 08-Mar-17 K-1A-SV1-8190 | Construction of Wall Struct for VA1 and VA3 10 09-Mar-17 20-Mar-17 10 K-1A-SV1-8210 Backfilling with Sand to Formation Level of Service Adit 21-Mar-17 23-Mar-17 K-1A-SV1-8240 | Construction of VA1 and VA3 Side Wall and base slab of SA 05-Apr-17 10 24-Mar-17 10 SUS Bay 4 (Ch6202.5-Ch6220) 17-Dec-16 A 03-Apr-17 Excavation to VA2 Formation Level K-1A-SV1-8500 Excavation to VA2 Formation Level 18-Jan-17 12-Jan-17 Compaction of Soil Surface and Casting Blinding Layer for VA2 K-1A-SV1-8510 Compaction of Soil Surface and Casting Blinding Layer for VA2 2 20-Jan-17 2 19-Jan-17 ■ Scaffold Erection at VA2 for Temporary Support of Base Slab Construct K-1A-SV1-8520 | Scaffold Erection at VA2 for Temporary Support of Base Slab Construction 01-Feb-17 02-Feb-17 2 ■ Formwork Erection and Waterproofing Works above VA2 for W/B Co K-1A-SV1-8530 Formwork Erection and Waterproofing Works above VA2 for W/B Construction 2 03-Feb-17 04-Feb-17 Laying Blinding and Waterproofing Works (E/B) K-1A-SV1-8540 Laying Blinding and Waterproofing Works (E/B) 10 10 17-Dec-16 A 12-Jan-17 Construction of Base Slab (E/B) K-1A-SV1-8550 | Construction of Base Slab (E/B) 10 10 17-Jan-17 27-Jan-17 ■ Laying Blinding and Waterproofing Works (W/B) K-1A-SV1-8552 Laying Blinding and Waterproofing Works (W/B) 2 07-Feb-17 2 06-Feb-17 Construction of Base Slab (W/B) K-1A-SV1-8555 | Construction of Base Slab (W/B) 18-Feb-17 08-Feb-17





3 MRP Jan 2017- Mar 2017

Project ID :13 3MPR Jan - Mar 17 Layout : KL201403 WP3 3MRP Page 4 of 8

| 3 Months Rolling Programme |              |         |          |  |  |
|----------------------------|--------------|---------|----------|--|--|
| Date                       | Revision     | Checked | Approved |  |  |
| 31-Dec-16                  | Jan 17 - Mar |         |          |  |  |

#### 土木工程拓展署 Civil Engineering and Development Department Hyder MEIN-ARDT KL/2014/03 Kai Tak Development - Stage 3 Infrastructure Works for Developments at the Southern Part of the Former Runway CEDD Orig Dur Dur K-1A-SV1-8560 Removal of Strut S3 20-Feb-17 23-Feb-17 Construction of Side Wall Structure K-1A-SV1-8580 | Construction of Side Wall Structure 20-Feb-17 02-Mar-17 10 10 ■ Installation of Re-prop Struct ins K-1A-SV1-8590 Installation of Re-prop Struct inside W/B and E/B 04-Mar-17 03-Mar-17 Removal of Strut S2 K-1A-SV1-8600 Removal of Strut S2 4 09-Mar-17 06-Mar-17 Erection of Scaffold K-1A-SV1-8605 | Erection of Scaffold for Base Slab 14-Mar-17 06-Mar-17 K-1A-SV1-8610 | Constrcution of Top Slab 12 12 15-Mar-17 28-Mar-17 K-1A-SV1-8625 Waterproofing Works 29-Mar-17 03-Apr-17 K-1A-SV1-8640 Removal of Strut S1 29-Mar-17 03-Apr-17 SUS Bay 3 (Ch6185-Ch6202.5) 07-Jan-17 06-Apr-17 Excavation to VA2 Formation Level K-1A-SV1-8660 Excavation to VA2 Formation Level 19-Jan-17 25-Jan-17 Compaction of Soil Surface and Casting Blinding Layer for VA2 K-1A-SV1-8661 Compaction of Soil Surface and Casting Blinding Layer for VA2 26-Jan-17 27-Jan-17 ■ Scaffold Erection at VA2 for Temporary Support of Base Slab Construct K-1A-SV1-8662 | Scaffold Erection at VA2 for Temporary Support of Base Slab Construction 01-Feb-17 02-Feb-17 ■ Formwork Erection and Waterproofing Works above VA2 for W/B Co K-1A-SV1-8663 Formwork Erection and Waterproofing Works above VA2 for W/B Construction 04-Feb-17 03-Feb-17 Laying Blinding and Waterproofing Works (E/B) K-1A-SV1-8664 Laying Blinding and Waterproofing Works (E/B) 8 07-Jan-17 16-Jan-17 ■ Construction of Base Slab (E/B) K-1A-SV1-8665 Construction of Base Slab (E/B) 10 17-Jan-17 27-Jan-17 10 ■ Laying Blinding and Waterproofing Works (W/B) K-1A-SV1-8666 Laying Blinding and Waterproofing Works (W/B) 06-Feb-17 07-Feb-17 2 ■ Construction of Base Slab (W/B) K-1A-SV1-8667 Construction of Base Slab (W/B) 18-Feb-17 10 08-Feb-17 K-1A-SV1-8720 Removal of Strut S3 4 23-Feb-17 Removal of Strut S3 20-Feb-17 Construction of Side Wal K-1A-SV1-8740 | Construction of Side Wall Structure 10 10 28-Feb-17 10-Mar-17 Installation of Re-pro K-1A-SV1-8750 | Installation of Re-prop Struct inside W/B and E/B 11-Mar-17 13-Mar-17 K-1A-SV1-8760 Removal of Strut S2 14-Mar-17 17-Mar-17 Removal of Stru K-1A-SV1-8765 Erection of Scaffold Erection 14-Mar-17 22-Mar-17 K-1A-SV1-8770 Constriution of Top Slab 12 12 23-Mar-17 06-Apr-17 SUS Bay 2 (Ch6167.5-Ch6185) 26-Jan-17 06-Apr-17 Excavation to VA2 Formation Level K-1A-SV1-8815 | Excavation to VA2 Formation Level 26-Jan-17 04-Feb-17 ■ Casting Blinding Layer for VA2 K-1A-SV1-8820 Casting Blinding Layer for VA2 06-Feb-17 07-Feb-17 2 K-1A-SV1-8840 | Construction of Base Slab for VA2 12 11-Feb-17 24-Feb-17 12 Removal of Strut SV2 K-1A-SV1-8860 Removal of Strut SV2 4 01-Mar-17 25-Feb-17 K-1A-SV1-8870 Construction of VA2 Wall Structure 04-Mar-17 13-Mar-17 Strip Formwork K-1A-SV1-8880 Strip Formwork and Remedial Works for Waterproofing 16-Mar-17 14-Mar-17



K-1A-SV1-8890 Backfilling with Sand and Removal part of SV1

K-1A-SV1-8900 Installation of Precast Concrete Slab for Base Slab Construction



3 MRP Jan 2017- Mar 2017

18-Mar-17

23-Mar-17

2

22-Mar-17

24-Mar-17

Project ID :13 3MPR Jan - Mar 17 Layout : KL201403 WP3 3MRP Page 5 of 8

| 3 Months Rolling Programme |              |         |          |  |  |
|----------------------------|--------------|---------|----------|--|--|
| Date                       | Revision     | Checked | Approved |  |  |
| 31-Dec-16                  | Jan 17 - Mar |         |          |  |  |
|                            |              |         |          |  |  |

Install

#### 土木工程拓展署 Civil Engineering and Development Department KL/2014/03 Kai Tak Development - Stage 3 Infrastructure Works for Developments at the Southern Part of the Former Runway Hyder MEINHARDT CEDD 九龍拓展處 Orig Dur Dur K-1A-SV1-8910 | Casting Blinding Layer (No-Fine) and Laying Waterproofing Works 25-Mar-17 29-Mar-17 K-1A-SV1-8920 | Construction of Base Slab 30-Mar-17 06-Apr-17 SUS and Ventilation Adits from CH6+220 to CH6+291 in Zone 2 17-Feb-17 06-Apr-1 W/B Construction of D-Wall in TTA Stage 1A 06-Apr-1 K-1A-SV2-5000 Construction of Guide Wall 23-Mar-17 17-Feb-17 K-1A-SV2-5500 Construction of D-wall Westbound (CH6+241 to CH6+291) WM49 18-Mar-17 29-Mar-17 K-1A-SV2-8410 Construction of D-wall Westbound (CH6+241 to CH6+291) WM51 10 10 25-Mar-17 06-Apr-17 85 15-Oct-16 A 18-Apr-17 SUS Structure from CH6+291 to 6+467 in Zone 3 E/B Construction of D-Wall Construction of D-wall Eastbound (CH6+405 to CH6+467) EH1 K-1A-SV3-2355 | Construction of D-wall Eastbound (CH6+405 to CH6+467) EH17 15 30-Dec-16 A 18-Jan-17 ■ Testing of D-wall (Sonic to K-1A-SV3-2400 Testing of D-wall (Sonic test and IC) 30 03-Feb-17 09-Mar-17 K-1A-SV3-2500 Toe Grouting Works 55 21-Jan-17 29-Mar-17 Construction of Socketed H-Pile 01-Feb-17 K-1A-SV3-3008 Installation of Socketted H-piles (CH6+320 to CH6+380) 45 45 01-Feb-17 24-Mar-17 K-1A-SV3-3009 Loading test for Socketted H-piles 10 10 25-Feb-17 08-Mar-17 W/B Construction of D-Wall in TTA Stage 1A 143 15-Oct-16 A 07-Apr-1 Construction of Guide Wall (CH6+291 to to CH6+467 K-1A-SV3-4000 Construction of Guide Wall (CH6+291 to to CH6+467) 45 15 15-Oct-16 A 18-Jan-17 Construction of D-wall Westbound (CH6+405 to CH6+467) WM24 K-1A-SV3-4035 | Construction of D-wall Westbound (CH6+405 to CH6+467) WM24 10 05-Jan-17 4 22-Dec-16 A Construction of D-wall Westbound (CH6+405 to CH6+467) WH19 K-1A-SV3-4038 Construction of D-wall Westbound (CH6+405 to CH6+467) WH19 12 10 28-Dec-16 A 12-Jan-17 Construction of D-wall Westbound (CH6+344 to CH6+405) WH37 K-1A-SV3-4205 Construction of D-wall Westbound (CH6+344 to CH6+405) WH37 12 0 16-Dec-16 A 31-Dec-16 A Construction of D-wall Westbound (CH6+344 to CH6+405) WM34 K-1A-SV3-4210 Construction of D-wall Westbound (CH6+344 to CH6+405) WM34 03-Jan-17 13-Jan-17 Construction of D-wall Westbound (CH6+344 to CH6+405) WM38 K-1A-SV3-4250 Construction of D-wall Westbound (CH6+344 to CH6+405) WM38 10 10 09-Jan-17 19-Jan-17 Construction of D-wall Westbound (CH6+291 to CH6+344) WM39A K-1A-SV3-4262 Construction of D-wall Westbound (CH6+291 to CH6+344) WM39A 10 2 19-Dec-16 A 03-Jan-17 Construction of D-wall Westbound (CH6+291 to CH6+344) WH46 K-1A-SV3-4264 Construction of D-wall Westbound (CH6+291 to CH6+344) WH46 12 4 28-Dec-16 A 05-Jan-17 Construction of D-wall Westbound (CH6+291 to CH6+344) WM43 K-1A-SV3-4265 Construction of D-wall Westbound (CH6+291 to CH6+344) WM43 10 10 03-Jan-17 13-Jan-17 Construction of D-wall Westbound (CH6+291 to CH6+344) WM41 K-1A-SV3-4266 | Construction of D-wall Westbound (CH6+291 to CH6+344) WM41 06-Jan-17 17-Jan-17 10 10 Construction of D-wall Westbound (CH6+291 to CH6+344) WM45 K-1A-SV3-4267 Construction of D-wall Westbound (CH6+291 to CH6+344) WM45 10 10 10-Jan-17 20-Jan-17 Construction of D-wall Westbound (CH6+291 to CH6+344) WH42 K-1A-SV3-4268 | Construction of D-wall Westbound (CH6+291 to CH6+344) WH42 12 13-Jan-17 26-Jan-17 Construction of D-wall Westbound (CH6+291 to CH6+344) WM47 K-1A-SV3-4269 Construction of D-wall Westbound (CH6+291 to CH6+344) WM47 10 17-Jan-17 27-Jan-17



K-1A-SV3-4270 Testing of D-wall (Sonic test and IC)

K-1A-SV3-4290 Construction of temporary cut-off wall at CH6+291

K-1A-SV3-4300 Construction of temporary cut-off wall at CH6+467

K-1A-SV3-4280 Toe Grouting Works

**Pumping Test** 



3 MRP Jan 2017- Mar 2017

06-Feb-17

01-Feb-17

06-Feb-17

27-Feb-17

40 27-Dec-16 A

11-Mar-17

31-Mar-17

20-Feb-17

07-Apr-17

08-Apr-17

30

50

45

52

50

52

Project ID:13 3MPR Jan - Mar 17 Layout: KL201403 WP3 3MRP Page 6 of 8

| 3 Months Rolling Programme |              |         |          |  |  |
|----------------------------|--------------|---------|----------|--|--|
| Date                       | Revision     | Checked | Approved |  |  |
| 31-Dec-16                  | Jan 17 - Mar |         |          |  |  |

Construction of temporary cut-off wall at CH6+2

Testing of D-wall (Soni



# KL/2014/03 Kai Tak Development - Stage 3 Infrastructure Works for Developments at the Southern Part of the Former Runway



| Hyder - Meinha         | ardt JV              |                                                              |      |     |             |            |           |                              |                                | 八龍拓展  Kowloon Development Office         |
|------------------------|----------------------|--------------------------------------------------------------|------|-----|-------------|------------|-----------|------------------------------|--------------------------------|------------------------------------------|
| y ID                   | Activity Name        |                                                              | Orig | Rem | Start       | Finish     | mber<br>8 | January<br>10                | February 20                    | March 21                                 |
|                        |                      |                                                              | Dur  | Dur |             |            | 18 25     | 01 08 15 22                  | 29 05 12 19                    | 26 05 12 19 2                            |
| K-1A-SV3-5100          | Installation of Dew  | atering Well, Observation Well and Recharging Well in Zone 3 | 35   | 35  | 27-Feb-17   | 08-Apr-17  |           |                              |                                |                                          |
| Excavation and E       | EL C Constantio      | _                                                            | 42   | 42  | 24-Feb-17   | 18-Apr-17  |           | <del> </del>                 |                                |                                          |
|                        |                      | nporary vehicular access at CH6+325                          | 42   | 42  |             | 18-Apr-17  |           | -                            |                                |                                          |
| 11 111 5 1 5 5 5 5 6 6 | Construction of ten  | potary temedian access at CITO 5225                          | .2   |     | 2110017     | 10 11p1 17 |           |                              |                                |                                          |
| SUS Structure fro      | om CH6+467 to        | o 6+568 in Zone 4                                            | 113  | 113 | 06-Dec-16 A | 23-May-17  |           |                              |                                |                                          |
| E/B Construction       |                      |                                                              | 67   | 67  | 09-Jan-17   | 30-Mar-17  |           |                              |                                |                                          |
| K-1A-SV4-2000          | Open Gate No. 3      |                                                              | 0    | 0   |             | 09-Jan-17* |           | ◆ Open Gate No. 3            |                                |                                          |
| K-1A-SV4-2100          | Construction of Gui  | ide Wall (CH6+467 to CH6+480)                                | 6    | 6   | 09-Jan-17   | 14-Jan-17  |           | Construction of Gu           | iide Wall (CH6+467 to CH6+48   | 0)                                       |
|                        |                      | <u> </u>                                                     | _    |     |             |            |           |                              |                                |                                          |
| K-1A-SV4-2110          | Construction of Gui  | ide Wall (CH6+480 to CH6+510)                                | 15   | 15  | 27-Jan-17   | 16-Feb-17  |           |                              | Constru                        | ction of Guide Wall (CH6+480 to CH6+51   |
| K-1A-SV4-2120          | Construction of Gui  | ide Wall (CH6+510 to CH6+555)                                | 24   | 24  | 16-Jan-17   | 15-Feb-17  |           |                              | Construc                       | tion of Guide Wall (CH6+510 to CH6+555   |
|                        |                      |                                                              | 2.   |     | 10 3411 17  | 13 100 17  |           |                              |                                |                                          |
| K-1A-SV4-2130          | Construction of Gui  | ide Wall (CH6+555 to CH6+560)                                | 5    | 5   | 19-Jan-17   | 24-Jan-17  |           | Const                        | truction of Guide Wall (CH6+55 | 5 to CH6+560)                            |
| K-1A-SV4-2170          | Construction of D-v  | wall Eastbound (CH6+467 to CH6+480) EM16                     | 10   | 10  | 19-Jan-17   | 02-Feb-17  |           |                              | Construction of D-wall Ea      | stbound (CH6+467 to CH6+480) EM16        |
| K 171 5V4 2170         | Construction of B    | Wall Editional (C110 1107 to C110 1100) EN110                | 10   | 10  | 17 3411 17  | 02 100 17  |           |                              |                                | · · · · · · · · · · · · · · · · · · ·    |
| K-1A-SV4-2171          | Construction of D-v  | wall Eastbound (CH6+467 to CH6+480) EH17                     | 12   | 12  | 03-Feb-17   | 16-Feb-17  |           |                              | Constru                        | ction of D-wall Eastbound (CH6+467 to C  |
| K-1A-SV4-2172          | Construction of D    | wall Eastbound (CH6+480 to CH6+510) EH12                     | 12   | 12  | 14-Feb-17   | 27-Feb-17  |           |                              |                                | Construction of D-wall Eastbound (       |
| K-1A-3V4-21/2          | Construction of D-V  | wall Eastbound (C110+460 to C110+310) E1112                  | 12   | 12  | 14-1-60-17  | 27-160-17  |           |                              |                                | `                                        |
| K-1A-SV4-2173          | Construction of D-v  | wall Eastbound (CH6+480 to CH6+510) EH14                     | 12   | 12  | 16-Feb-17   | 01-Mar-17  |           |                              |                                | Construction of D-wall Eastbound         |
| K-1A-SV4-2174          | Construction of D    | wall Eastbound (CH6+480 to CH6+510) EH10                     | 12   | 12  | 18-Feb-17   | 03-Mar-17  |           | -                            |                                | Construction of D-wall Eastbo            |
| K-1A-5V4-21/4          | Construction of D-V  | wall Eastboulld (Crio+480 to Crio+310) Eri10                 | 12   | 12  | 10-160-17   | 03-Wai-1/  |           |                              |                                |                                          |
| K-1A-SV4-2175          | Construction of D-v  | wall Eastbound (CH6+480 to CH6+510) EH13                     | 12   | 12  | 01-Mar-17   | 14-Mar-17  |           |                              |                                | Construction of                          |
| W 1 A CWA 2176         | C + +: CD            | H.E. d. 1/CHC+400+ CHC+C10\ FH11                             | 12   | 10  | 04.34 17    | 17.16 17   |           |                              |                                | Construction                             |
| K-1A-SV4-21/6          | Construction of D-v  | wall Eastbound (CH6+480 to CH6+510) EH11                     | 12   | 12  | 04-Mar-17   | 17-Mar-17  |           |                              |                                | Construction                             |
| K-1A-SV4-2177          | Construction of D-v  | wall Eastbound (CH6+510 to CH6+555) EH09                     | 12   | 12  | 23-Jan-17   | 08-Feb-17  |           |                              | Construction of D              | wall Eastbound (CH6+510 to CH6+555) H    |
|                        |                      |                                                              |      |     |             |            |           |                              | Canatana                       | tion of D-wall Eastbound (CH6+510 to CH  |
| K-1A-SV4-2178          | Construction of D-v  | wall Eastbound (CH6+510 to CH6+555) EH07                     | 12   | 12  | 02-Feb-17   | 15-Feb-17  |           | li.                          |                                |                                          |
| K-1A-SV4-2179          | Construction of D-v  | wall Eastbound (CH6+510 to CH6+555) EH05                     | 12   | 12  | 09-Feb-17   | 22-Feb-17  |           |                              |                                | Construction of D-wall Eastbound (CH6+5  |
|                        |                      | <u> </u>                                                     |      |     |             |            |           |                              | <u></u>                        | Construction of D-wall Eastbound         |
| K-1A-SV4-2180          | Construction of D-v  | wall Eastbound (CH6+510 to CH6+555) EH03                     | 12   | 12  | 16-Feb-17   | 01-Mar-17  |           |                              |                                |                                          |
| K-1A-SV4-2181          | Construction of D-v  | wall Eastbound (CH6+510 to CH6+555) EH08A                    | 12   | 12  | 23-Feb-17   | 08-Mar-17  |           |                              |                                | Construction of D-wall I                 |
|                        |                      | <u> </u>                                                     |      |     |             |            |           |                              |                                |                                          |
| K-1A-SV4-2182          | Construction of D-v  | wall Eastbound (CH6+510 to CH6+555) EH06                     | 12   | 12  | 02-Mar-17   | 15-Mar-17  |           |                              |                                | Construction o                           |
| K-1A-SV4-2183          | Construction of D-v  | wall Eastbound (CH6+510 to CH6+555) EH08                     | 12   | 12  | 10-Mar-17   | 23-Mar-17  |           | <b>-</b>                     |                                | Con                                      |
|                        |                      |                                                              |      |     |             | 25 1141 17 |           |                              |                                |                                          |
| K-1A-SV4-2185          | Construction of D-v  | wall Eastbound (CH6+510 to CH6+555) EH04                     | 12   | 12  | 17-Mar-17   | 30-Mar-17  |           |                              |                                |                                          |
| K-1A-SV4-2190          | Construction of D-v  | wall Eastbound (CH6+555 to CH6+560)                          | 12   | 12  | 25-Jan-17   | 10-Feb-17  |           |                              | Construction of                | D-wall Eastbound (CH6+555 to CH6+560     |
| 11 111 5 ( 1 21) 0     | Construction of B    | Tustooma (C110 - 555 to C110 - 500)                          | 12   |     | 25 5411 17  | 10 100 17  |           |                              |                                |                                          |
|                        |                      | Wall in TTA Stage 1A                                         | 71   |     | 06-Dec-16 A | 28-Mar-17  |           |                              |                                | CT - CYY C - 4000                        |
| K-1A-SV4-3992          | Construction of Gui  | ide Wall (CH6+467 to CH6+480)                                | 9    | 9   | 16-Jan-17   | 25-Jan-17  |           | Con                          | struction of Guide Wall (CH6+4 | 6 / to CH6+480)                          |
| K-1A-SV4-3996          | Construction of Gui  | ide Wall (CH6+510 to CH6+555)                                | 24   | 5   | 06-Dec-16 A | 06-Jan-17  |           | Construction of Guide Wall ( | CH6+510 to CH6+555)            |                                          |
|                        |                      | ,                                                            |      |     |             |            |           |                              |                                | A-17228-7-1-172-1-1388-7-1-1788-1-1-1-1  |
| K-1A-SV4-4005          | Construction of Gui  | ide Wall (CH6+555 to CH6+560)                                | 5    | 5   | 25-Jan-17   | 02-Feb-17  |           |                              | Construction of Guide Wa       | II (CH6+555 to CH6+560)                  |
| K-1A-SV4-4102          | Construction of D-v  | wall Westbound (CH6+467 to CH6+480) WH19                     | 12   | 12  | 26-Jan-17   | 11-Feb-17  |           | <u> </u>                     | Construction                   | of D-wall Westbound (CH6+467 to CH6+4    |
| 11.571 1102            | z once action of D-V | (CITO TO TO CITO TOO) TITLE                                  | 12   | 12  |             |            | <u> </u>  | II.                          |                                | `                                        |
| K-1A-SV4-4105          | Construction of D-v  | wall Westbound (CH6+467 to CH6+480) WH17                     | 12   | 12  | 08-Feb-17   | 21-Feb-17  |           |                              |                                | Construction of D-wall Westbound (CH6+40 |
| K-1A-SV4-4108          | ~                    | wall Westbound (CH6+467 to CH6+480) WM18                     | 10   | 10  | 22-Feb-17   | 04-Mar-17  |           | · <del> </del>               |                                | Construction of D-wall Westb             |






3 MRP Jan 2017- Mar 2017

Page 7 of 8

Project ID :13 3MPR Jan - Mar 17 Layout : KL201403 WP3 3MRP Page 7 of 8

| 3 Months Rolling Programme |              |         |          |  |  |  |  |  |
|----------------------------|--------------|---------|----------|--|--|--|--|--|
| Date                       | Revision     | Checked | Approved |  |  |  |  |  |
| 31-Dec-16                  | Jan 17 - Mar |         |          |  |  |  |  |  |

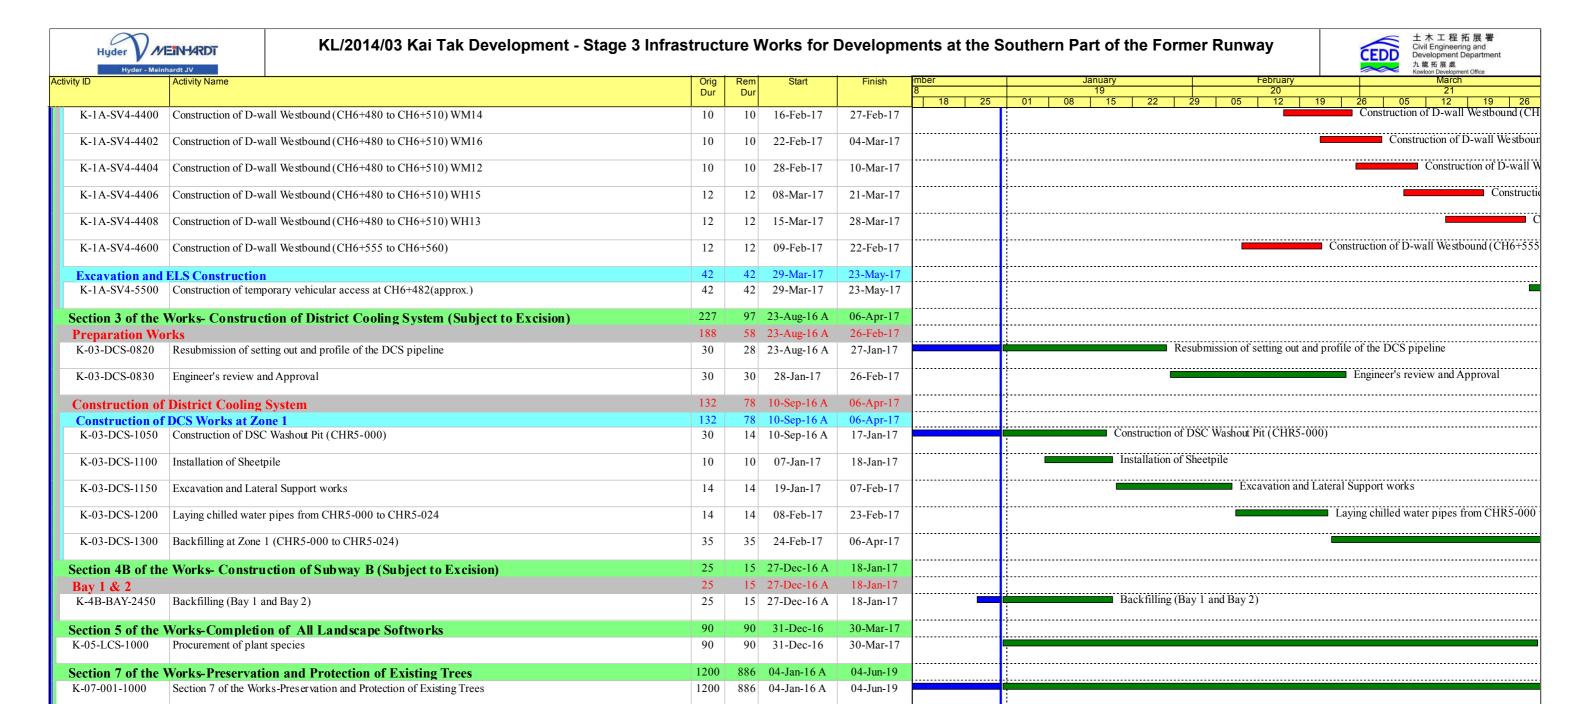



**Sections Completion Date** 

K-PK-SCC-2100 Completion of Section 2-Demolition of Radar Tower and Guard House



Page 8 of 8

0 31-Dec-16

0

31-Dec-16

31-Dec-16

Project ID :13 3MPR Jan - Mar 17 Layout : KL201403 WP3 3MRP Page 8 of 8

Completion of Section 2-Demolition of Radar Tower and Guard House

| 3 Months Rolling Programme |              |         |          |  |  |  |  |  |
|----------------------------|--------------|---------|----------|--|--|--|--|--|
| Date                       | Revision     | Checked | Approved |  |  |  |  |  |
| 31-Dec-16                  | Jan 17 - Mar |         |          |  |  |  |  |  |

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong.. : (852)-24508238 : (852)-24508032 : mcl@fugro.com.hk Tel Email




Appendix B


**Project Organization Chart** 

Room 723 & 725, 7/F, Block B, Profit Industrial Building

Profit Industrial Building, Tel : (852)-24508238 1-15 Kwai Fung Crescent, Kwai Fong, Fax : (852)-24508032 Hong Kong.. Email : mcl@fugro.com.hk



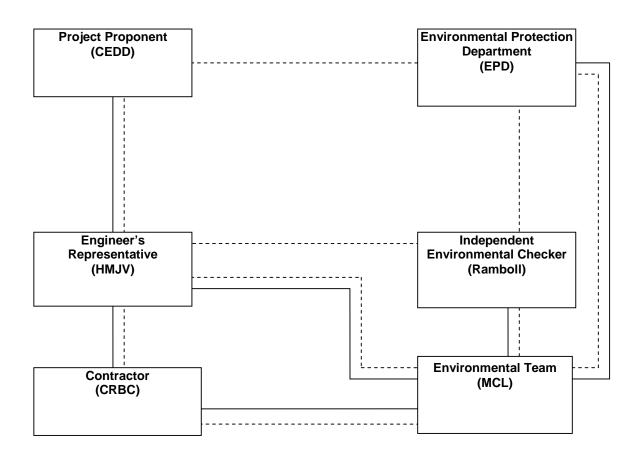



Room 723 & 725, 7/F, Block B,

Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong.. : (852)-24508238 : (852)-24508032 Tel Fax Email : mcl@fugro.com.hk



# Appendix C

Action and Limit Levels for Air Quality and Noise

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

Tel : (852)-24508238 1-15 Kwai Fung Crescent, Kwai Fong, Fax : (852)-24508032 Hong Kong.. Email : mcl@fugro.com.hk



### Action and Limit Levels for 24-hr TSP and 1-hr TSP

| Parameter            | Monitoring Station | Action Level<br>(μg/m³) | Limit Level<br>(µg/ m³) |
|----------------------|--------------------|-------------------------|-------------------------|
| 24-hr TSP            | KTD1a              | 177                     |                         |
| 24-π 13P<br>(μg/m³)  | KTD2a              | 157                     | 260                     |
| (μg/111 )            | KER1b              | 172                     |                         |
| *4 b. TCD            | KTD1a              | 285                     |                         |
| *1-hr TSP<br>(µg/m³) | KTD2a              | 279                     | 500                     |
| (µg/III )            | KER1b              | 295                     |                         |

Action and Limit Levels for Construction Noise, Leq (30min), dB(A)

| Time Period                      | Location                | Action                                    | Limit    |
|----------------------------------|-------------------------|-------------------------------------------|----------|
| 0700-1900 hrs on normal weekdays | KTD1a<br>KTD2a<br>KER1b | When one documented complaint is received | 75 dB(A) |

<sup>1-</sup>hr TSP monitoring should be required in case of complaints.

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong.. : (852)-24508238 : (852)-24508032 Fax Email: mcl@fugro.com.hk



### Appendix D

**Calibration Certificates of Monitoring Equipment** 



TISCH ENVIRONMENTAL, INC. 145 SOUTH MIAMI AVE VILLAGE OF CLEVES, OH 45002 513.467.9000 877.263.7610 TOLL FREE 513.467.9009 FAX

# ORIFICE TRANSFER STANDARD CERTIFICATION WORKSHEET TE-5025A

| Date - Ja<br>Operator |                            | Rootsmeter<br>Orifice I.I  | -/                                   | 438320<br>2456                                 | Ta (K) -<br>Pa (mm) -            | 292<br>748.03                        |
|-----------------------|----------------------------|----------------------------|--------------------------------------|------------------------------------------------|----------------------------------|--------------------------------------|
| PLATE<br>OR<br>Run #  | VOLUME<br>START<br>(m3)    | VOLUME<br>STOP<br>(m3)     | DIFF<br>VOLUME<br>(m3)               | DIFF<br>TIME<br>(min)                          | METER<br>DIFF<br>Hg<br>(mm)      | ORFICE<br>DIFF<br>H2O<br>(in.)       |
| 1<br>2<br>3<br>4<br>5 | NA<br>NA<br>NA<br>NA<br>NA | NA<br>NA<br>NA<br>NA<br>NA | 1.00<br>1.00<br>1.00<br>1.00<br>1.00 | 1.4420<br>1.0220<br>0.9130<br>0.8670<br>0.7170 | 3.2<br>6.4<br>7.9<br>8.8<br>12.7 | 2.00<br>4.00<br>5.00<br>5.50<br>8.00 |

#### DATA TABULATION

| Vstd                                           | (x axis)<br>Qstd                     | (y axis)                                       |       | Va                                             | (x axis)<br>Qa                                 | (y axis)                                       |
|------------------------------------------------|--------------------------------------|------------------------------------------------|-------|------------------------------------------------|------------------------------------------------|------------------------------------------------|
| 1.0002<br>0.9959<br>0.9938<br>0.9926<br>0.9874 | 0.6936<br>0.9745<br>1.0885<br>1.1449 | 1.4174<br>2.0045<br>2.2411<br>2.3504<br>2.8347 |       | 0.9957<br>0.9915<br>0.9893<br>0.9882<br>0.9830 | 0.6905<br>0.9701<br>1.0836<br>1.1398<br>1.3710 | 0.8836<br>1.2496<br>1.3971<br>1.4653<br>1.7672 |
| Qstd slop<br>intercept<br>coefficie            | t (b) =                              | 2.07173<br>-0.01761<br>0.99996                 | n e n | Qa slop<br>intercep<br>coeffici                | t (b) =                                        | 1.29728<br>-0.01098<br>0.99996                 |
| y axis =                                       | SQRT[H2O(                            | Pa/760)(298/7                                  | [a)]  | y axis =                                       | SQRT[H2O(                                      | Га/Ра)].                                       |

#### CALCULATIONS

Vstd = Diff. Vol[(Pa-Diff. Hg)/760](298/Ta)
Qstd = Vstd/Time

Va = Diff Vol [(Pa-Diff Hg)/Pa] Qa = Va/Time

For subsequent flow rate calculations:

Qstd =  $1/m\{ [SQRT (H2O (Pa/760) (298/Ta))] - b\}$ Qa =  $1/m\{ [SQRT H2O (Ta/Pa)] - b\}$ 

Room 723 & 725, 7/F, Block B. Profit Industrial Building,

1-15 Kwai Fung Crescent, Kwai Fong,

Hong Kong.

: (852)-24508238 Tel (852)-24508032 **Email** : mcl@fugro.com.hk



#### TSP SAMPLER CALIBRATION CALCULATION SPREADSHEET

Project: Environmantal Monitoring Works For Contract No. KLN/2015/07

Location: KER1b

Brand:

Tisch

Model:

TE-5170

S/N:

3482

**CONDITIONS** 

Sea Level Pressure (hPa):

1017.2

Corrected Pressure (mm Hg):

763

298

Date of Calibration: 16-Nov-16

Technician: Jimmy Lui

Next Calibration Date: 15-Feb-17

Temperature (°C):

25

Temperature (K):

**CALIBRATION ORIFICE** 

Make: Model: Tisch

TE-5025A

Qstd Slope: **Qstd Intercept:**  2.07173

Calibration Date:

14-Jan-16

**Expiry Date:** 

-0.01761

S/N:

2456

14-Jan-17

| CAL | Вг | KA |   | U | NO | • |
|-----|----|----|---|---|----|---|
|     | -  | T  | - | - | -  | _ |

| 1         |         |         |        |          |         |             |               |            |  |  |  |
|-----------|---------|---------|--------|----------|---------|-------------|---------------|------------|--|--|--|
| Plate No. | H2O (L) | H2O (R) | H2O    | Qstd     | ı       | IC          |               | LINEAR     |  |  |  |
|           | (in)    | (in)    | (in)   | (m³/min) | (chart) | (corrected) | F             | REGRESSION |  |  |  |
| 18        | 12.20   | 1.90    | 10.300 | 1.561    | 59.00   | 59.12       | Slope =       | 32.3615    |  |  |  |
| 13        | 11.50   | 2.10    | 9.400  | 1.491    | 56.00   | 56.11       | Intercept =   | 8.3422     |  |  |  |
| 10        | 10.30   | 3.80    | 6.500  | 1.242    | 49.00   | 49.10       | Corr. coeff.: | 0.9987     |  |  |  |
| 7         | 8.80    | 4.60    | 4.200  | 1.000    | 40.00   | 40.08       |               |            |  |  |  |
| 5         | 7.90    | 5.10    | 2.800  | 0.818    | 35.00   | 35.07       |               |            |  |  |  |

#### Calculations:

Qstd = 1/m[Sqrt(H2O(Pa/Pstd)(Tstd/Ta))-b]

IC = I[Sqrt(Pa/Pstd)(Tstd/Ta)]

Qstd = standard flow rate

IC = corrected chart response

I = actual chart response

m = calibrator Qstd slope

b = calibrator Qstd intercept

Ta = actual temperature during calibration (deg K)

Pa = actual pressure during calibration (mm Hg)

Tstd = 298 deg K

Pstd = 760 mm Hg

#### For subsequent calculation of sampler flow:

1/m((I)[Sqrt(298/Tav)(Pav/760)]-b)

m = sampler slope

b = sampler intercept

I = chart response

Tav = daily average temperature

Pav = daily average pressure

**FLOW RATE CHART** 70.00 60.00 50.00 Actual Chart Response (IC) 40.00 30.00 20.00 10.00 0.00 0.000 2.000 0.500 1.000 1.500 Standard Flow Rate (m3/min)

CHOI KAM HO **Project Consultant**  Report Date:

16<sup>th</sup> November, 2016

Room 723 & 725, 7/F, Block B,

Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong.

: (852)-24508238 : (852)-24508032 Fax : mcl@fugro.com.hk



#### TSP SAMPLER CALIBRATION CALCULATION SPREADSHEET

Project: Environmantal Monitoring Works For Contract No. KLN/2015/07

Date of Calibration: 12-Oct-16

Location: KTD1a

Next Calibration Date: 11-Jan-17

Technician: Jimmy Lui

Brand: Model: Tisch

TE-5170

S/N:

4037

CONDITIONS

Sea Level Pressure (hPa):

1012.5

Corrected Pressure (mm Hg):

759

Temperature (°C):

25

Temperature (K):

298

**CALIBRATION ORIFICE** 

Make:

Tisch

Qstd Slope:

2.07173

Model:

TE-5025A

**Qstd Intercept:** 

-0.01761

Calibration Date:

14-Jan-16

Expiry Date:

14-Jan-17

S/N: 2456

CALIBRATIONS

|           | CALIBRATIONS |         |        |          |         |             |               |            |  |  |  |  |
|-----------|--------------|---------|--------|----------|---------|-------------|---------------|------------|--|--|--|--|
| Plate No. | H2O (L)      | H2O (R) | H2O    | Qstd     | I       | IC          |               | LINEAR     |  |  |  |  |
| Flate No. | (in)         | (in)    | (in)   | (m³/min) | (chart) | (corrected) | F             | REGRESSION |  |  |  |  |
| 18        | 11.00        | -2.40   | 13.400 | 1.774    | 59.00   | 58.96       | Slope =       | 30.9648    |  |  |  |  |
| 13        | 9.50         | -0.90   | 10.400 | 1.564    | 52.00   | 51.97       | Intercept =   | 3.3615     |  |  |  |  |
| 10        | 8.80         | -0.20   | 9.000  | 1.456    | 47.00   | 46.97       | Corr. coeff.: | 0.9968     |  |  |  |  |
| 7         | 6.90         | 1.80    | 5.100  | 1.098    | 38.00   | 37.97       |               |            |  |  |  |  |
| 5         | 6.10         | 2.50    | 3.600  | 0.924    | 32.00   | 31.98       |               |            |  |  |  |  |

#### Calculations:

Qstd = 1/m[Sqrt(H2O(Pa/Pstd)(Tstd/Ta))-b]

IC = I[Sqrt(Pa/Pstd)(Tstd/Ta)]

Qstd = standard flow rate

IC = corrected chart response

I = actual chart response

m = calibrator Qstd slope

b = calibrator Qstd intercept

Ta = actual temperature during calibration (deg K)

Pa = actual pressure during calibration (mm Hg)

Tstd = 298 deg K

Pstd = 760 mm Ha

### For subsequent calculation of sampler flow:

1/m((I)[Sqrt(298/Tav)(Pav/760)]-b)

m = sampler slope


b = sampler intercept

I = chart response

Tav = daily average temperature

Pav = daily average pressure

**FLOW RATE CHART** 70.00

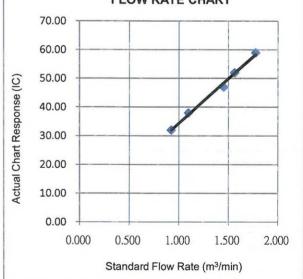

**CHOI KAM HO Project Consultant** 

Report Date: 12<sup>th</sup> October, 2016

Room 723 & 725, 7/F, Block B,

Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong,

Hong Kong.

: (852)-24508238 Tel : (852)-24508032 Fax : mcl@fugro.com.hk



#### TSP SAMPLER CALIBRATION CALCULATION SPREADSHEET

Project: Environmantal Monitoring Works For Contract No. KLN/2015/07

Date of Calibration: 12-Oct-16

Location: KTD2a

Next Calibration Date: 11-Jan-17

Technician: Jimmy Lui

Brand: Model: Tisch

TE-5170

S/N: 3838

CONDITIONS

Sea Level Pressure (hPa):

1012.5

Corrected Pressure (mm Hg):

759

Temperature (°C):

25

Temperature (K):

298

CALIBRATION ORIFICE

Make:

Tisch

Qstd Slope:

2.07173

Model: Calibration Date: TE-5025A 14-Jan-16

**Qstd Intercept:** 

-0.01761

Expiry Date:

S/N:

14-Jan-17

2456

CALIBRATIONS

|           | CALIBRATIONS |         |        |          |         |             |               |           |  |  |  |
|-----------|--------------|---------|--------|----------|---------|-------------|---------------|-----------|--|--|--|
| Plate No. | H2O (L)      | H2O (R) | H2O    | Qstd     | I       | IC          |               | LINEAR    |  |  |  |
| Flate No. | (in)         | (in)    | (in)   | (m³/min) | (chart) | (corrected) | R             | EGRESSION |  |  |  |
| 18        | 11.30        | -2.90   | 14.200 | 1.826    | 57.00   | 56.96       | Slope =       | 27.2421   |  |  |  |
| 13        | 9.70         | -1.30   | 11.000 | 1.608    | 52.00   | 51.97       | Intercept =   | 7.2807    |  |  |  |
| 10        | 8.70         | -0.30   | 9.000  | 1.456    | 46.00   | 45.97       | Corr. coeff.: | 0.9979    |  |  |  |
| 7         | 6.90         | 1.50    | 5.400  | 1.129    | 38.00   | 37.97       |               |           |  |  |  |
| 5         | 5.90         | 2.50    | 3.400  | 0.898    | 32.00   | 31.98       |               |           |  |  |  |

#### Calculations:

Qstd = 1/m[Sqrt(H2O(Pa/Pstd)(Tstd/Ta))-b]

IC = I[Sqrt(Pa/Pstd)(Tstd/Ta)]

Qstd = standard flow rate

IC = corrected chart response

I = actual chart response

m = calibrator Qstd slope

b = calibrator Qstd intercept

Ta = actual temperature during calibration (deg K)

Pa = actual pressure during calibration (mm Hg)

Tstd = 298 deg K

Pstd = 760 mm Hg

#### For subsequent calculation of sampler flow:

1/m((I)[Sqrt(298/Tav)(Pav/760)]-b)

m = sampler slope

b = sampler intercept

= chart response

Tav = daily average temperature

Pav = daily average pressure

FLOW RATE CHART 60.00 50.00 Actual Chart Response (IC) 40.00 30.00 20.00 10.00 0.00 0.000 0.500 1.000 1.500 2.000 Standard Flow Rate (m3/min)

**CHOI KAM HO Project Consultant**  Report Date:

12<sup>th</sup> October, 2016

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

1-15 Kwai Fung Crescent, Kwai Fong,

Hong Kong.

Tel : (852)-24508238 : (852)-24508032 : mcl@fugro.com.hk Fax Fmail



#### TSP SAMPLER CALIBRATION CALCULATION SPREADSHEET

Project: Environmantal Monitoring Works For Contract No. KLN/2015/07

Location: KER1b

Brand: Model: Tisch

TE-5170

S/N:

3482

Date of Calibration: 10-Jan-17

Next Calibration Date: 7-Apr-17

Technician: Jimmy Lui

CONDITIONS

Sea Level Pressure (hPa):

1018.1

Corrected Pressure (mm Hg):

764

Temperature (°C):

19

Temperature (K):

292

**CALIBRATION ORIFICE** 

Make: Model:

H20 (R)

(in)

-11.60

-10.40

-9.40

-7.90

-7.40

Tisch

H20

(in)

11.000

8.600

6.600

3.700

2.700

TE-5025A

**Qstd Intercept:** 

40.00

35.00

2.07173

Calibration Date:

14-Jan-16

**Expiry Date:** 

**Qstd Slope:** 

-0.01761 14-Jan-17

S/N:

2456

0.949

0.812

| CALIBR   | RATIONS |             |               |            |  |  |  |
|----------|---------|-------------|---------------|------------|--|--|--|
| Qstd     | I       | IC          | LINEAR        |            |  |  |  |
| (m³/min) | (chart) | (corrected) | F             | REGRESSION |  |  |  |
| 1.630    | 59.00   | 59.76       | Slope =       | 30.4307    |  |  |  |
| 1.442    | 56.00   | 56.72       | Intercept =   | 11.3049    |  |  |  |
| 1.265    | 49.00   | 49.63       | Corr. coeff.: | 0.9952     |  |  |  |

40.52

35.45

### 5 Calculations:

Plate No.

18

13

10

7

Qstd = 1/m[Sqrt(H2O(Pa/Pstd)(Tstd/Ta))-b]

H2O (L)

(in)

-0.60

-1.80

-2.80

-4.20

-4.70

IC = I[Sqrt(Pa/Pstd)(Tstd/Ta)]

Qstd = standard flow rate

IC = corrected chart response

I = actual chart response

m = calibrator Qstd slope

b = calibrator Qstd intercept

Ta = actual temperature during calibration (deg K)

Pa = actual pressure during calibration (mm Hg)

Tstd = 298 deg K

Pstd = 760 mm Hg

## For subsequent calculation of sampler flow:

1/m((I)[Sqrt(298/Tav)(Pav/760)]-b)

m = sampler slope

b = sampler intercept

I = chart response

Tav = daily average temperature

Pav = daily average pressure

FLOW RATE CHART 70.00 60.00 50.00 Actual Chart Response (IC) 40.00 30.00 20.00 10.00 0.00 0.000 0.500 1.000 1.500 2.000 Standard Flow Rate (m3/min)

**CHOI KAM HO** 

**Project Consultant** 

Report Date: 10th January, 2017

Room 723 & 725, 7/F, Block B. Profit Industrial Building,

1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong.

Tel : (852)-24508238 Fax (852)-24508032 Email : mcl@fugro.com.hk



#### TSP SAMPLER CALIBRATION CALCULATION SPREADSHEET

Project: Environmantal Monitoring Works For Contract No. KLN/2015/07

4037

Location: KTD1a Brand:

Tisch

Model:

TE-5170

S/N:

Date of Calibration: 10-Jan-17

Next Calibration Date: 7-Apr-17

Technician: Jimmy Lui

CONDITIONS

Sea Level Pressure (hPa):

1018.1

Corrected Pressure (mm Hg):

764

Temperature (°C):

19

Temperature (K):

292

**CALIBRATION ORIFICE** 

Make:

Tisch

**Qstd Slope: Qstd Intercept:**  2.07173

Model: Calibration Date: TE-5025A 14-Jan-16

**Expiry Date:** 

-0.01761

S/N:

2456

14-Jan-17

|                         |       | CAL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | IBR/ | TIONS            | ; |
|-------------------------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------------------|---|
| The same of the same of | <br>_ | The second secon |      | Winds - Williams |   |

| I          | O/LIDIO/IIOIIO |         |        |          |         |             |               |           |  |
|------------|----------------|---------|--------|----------|---------|-------------|---------------|-----------|--|
| Plate No.  | H2O (L)        | H2O (R) | H2O    | Qstd     | I       | IC          |               | LINEAR    |  |
| i late No. | (in)           | (in)    | (in)   | (m³/min) | (chart) | (corrected) | R             | EGRESSION |  |
| 18         | 0.40           | -12.50  | 12.900 | 1.764    | 52.00   | 52.67       | Slope =       | 33.2726   |  |
| 13         | -0.80          | -11.40  | 10.600 | 1.600    | 48.00   | 48.62       | Intercept =   | -4.9783   |  |
| 10         | -2.20          | -9.90   | 7.700  | 1.365    | 41.00   | 41.53       | Corr. coeff.: | 0.9963    |  |
| 7          | -3.50          | -8.50   | 5.000  | 1.102    | 32.00   | 32.41       |               |           |  |
| 5          | -4.40          | -7.60   | 3.200  | 0.883    | 23.00   | 23.30       |               |           |  |

#### Calculations:

Qstd = 1/m[Sqrt(H2O(Pa/Pstd)(Tstd/Ta))-b]

IC = I[Sqrt(Pa/Pstd)(Tstd/Ta)]

Qstd = standard flow rate

IC = corrected chart response

I = actual chart response

m = calibrator Qstd slope

b = calibrator Qstd intercept

Ta = actual temperature during calibration (deg K)

Pa = actual pressure during calibration (mm Hg)

Tstd = 298 deg K

Pstd = 760 mm Hg

### For subsequent calculation of sampler flow:

1/m((I)[Sqrt(298/Tav)(Pav/760)]-b)


m = sampler slope

b = sampler intercept

I = chart response

Tav = daily average temperature

Pav = daily average pressure

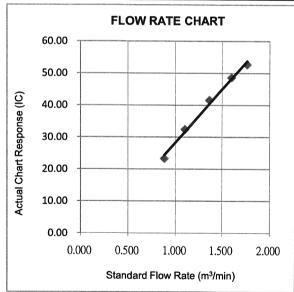



**CHOI KAM HO Project Consultant** 

Report Date: 10<sup>th</sup> January, 2017

Room 723 & 725, 7/F, Block B,

Profit Industrial Building,

1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong. Tel : (852)-24508238 Fax : (852)-24508032 Email : mcl@fugro.com.hk



### TSP SAMPLER CALIBRATION CALCULATION SPREADSHEET

Project : Environmantal Monitoring Works For Contract No. KLN/2015/07

Location: KTD2a

\_ .

Brand: Model:

i:

Tisch

TE-5170

S/N:

3838

Date of Calibration: 10-Jan-17

Next Calibration Date: 7-Apr-17

Technician: Jimmy Lui

CONDITIONS

Sea Level Pressure (hPa):

1018.1

Corrected Pressure (mm Hg):

764

Temperature (°C):

19

Temperature (K):

292

**CALIBRATION ORIFICE** 

Make:

Tisch

Qstd Slope:

2.07173

Model:

TE-5025A

Qstd Intercept:

-0.01761

Calibration Date: S/N:

14-Jan-16

Expiry Date:

14-Jan-17

24

2456

**CALIBRATIONS** 

| -               | *************************************** |         |         |        | CALIBR   | CATIONS |             |               |            |  |
|-----------------|-----------------------------------------|---------|---------|--------|----------|---------|-------------|---------------|------------|--|
| l <sub>Pl</sub> | late No.                                | H2O (L) | H2O (R) | H2O    | Qstd     | ı       | IC          |               | LINEAR     |  |
| L               |                                         | (in)    | (in)    | (in)   | (m³/min) | (chart) | (corrected) | F             | REGRESSION |  |
|                 | 18                                      | 0.80    | -13.00  | 13.800 | 1.825    | 52.00   | 52.67       | Slope =       | 28.2743    |  |
|                 | 13                                      | -0.80   | -11.10  | 10.300 | 1.578    | 46.00   | 46.59       | Intercept =   | 1.8309     |  |
|                 | 10                                      | -2.30   | -9.70   | 7.400  | 1.338    | 40.00   | 40.52       | Corr. coeff.: | 0.9964     |  |
|                 | 7                                       | -3.30   | -8.50   | 5.200  | 1.123    | 34.00   | 34.44       |               |            |  |
|                 | 5                                       | -4.40   | -7.50   | 3.100  | 0.869    | 25.00   | 25.32       |               |            |  |

#### Calculations:

Qstd = 1/m[Sqrt(H2O(Pa/Pstd)(Tstd/Ta))-b]

IC = I[Sqrt(Pa/Pstd)(Tstd/Ta)]

Qstd = standard flow rate

IC = corrected chart response

I = actual chart response

m = calibrator Qstd slope

b = calibrator Qstd intercept

Ta = actual temperature during calibration (deg K)

Pa = actual pressure during calibration (mm Hg)

Tstd = 298 deg K

Pstd = 760 mm Hg

### For subsequent calculation of sampler flow:

1/m((I)[Sqrt(298/Tav)(Pav/760)]-b)

m = sampler slope

b = sampler intercept

I = chart response

Tav = daily average temperature

Pav = daily average pressure

FLOW RATE CHART

60.00

50.00

40.00

30.00

10.00

0.000

0.000

0.500

1.000

1.500

2.000

Standard Flow Rate (m³/min)

CHOI KAM HO
Project Consultant

Report Date:

10<sup>th</sup> January, 2017

### **FUGRO TECHNICAL SERVICES LIMITED**

Fugro Development Centre, 5 Lok Yi Street, Tai Lam, Tuen Mun, N.T., Hong Kong.

Tel : +852 2450 8233 Fax : +852 2450 6138 E-mail: matlab@fugro.com Website: www.materialab.com



Report No.: 161966CA161195

Page 1 of 1

## CALIBRATION CERTIFICATE OF ANEMOMETER

### **Client Supplied Information**

Client: Materialab Consultants Ltd.

Room 723 & 725, 7/F., Block B Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Chung, N.T. Address:

Project: Calibration Services

### **Details of Unit Under Test, UUT**

Description

Anemometer

Manufacturer:

**Smart Sensor** 

Model No.

AR816+

Equipment ID.:

MC-A-001

Next Calibration Date:

05-Jun-2017

### **Laboratory Information**

Details of Reference Equipment -

Description

Reference Anemometer

Equipment ID.:

R-101-4

**Date of Calibration** 

06-Jun-2016

Ambient Temperature

21 °C

Calibration Location :

Calibration Laboratory of MateriaLab

Method Used: By direct Comparison

#### **Calibration Results:**

| Reference Reading | UUT Reading | Error |  |  |
|-------------------|-------------|-------|--|--|
| (m/s)             | (m/s)       | (m/s) |  |  |
| 0.00              | 0.0         | 0.00  |  |  |
| 0.99              | 1.0         | +0.01 |  |  |
| 2.02              | 2.0         | -0.02 |  |  |
| 5.00              | 5.0         | 0.00  |  |  |
| 9.98              | 9.9         | -0.08 |  |  |

#### Remarks:

1. The equipment being used in this calibration is traceable to recognized National Standards.

CA-R-297 (22/07/2009)

Date: 7-6-2016 Certified by: \_\_\_\_\_ Chan Chun Wai (Manager)

\*\* End of Report \*\*

### **FUGRO TECHNICAL SERVICES LIMITED**

Fugro Development Centre, 5 Lok Yi Street, Tai Lam, Tuen Mun, N.T., Hong Kong. Tel: +852 2450 8233 Fax: +852 2450 6138 E-mail: matlab@fugro.com.hk Website: www.materialab.com.hk



Page 1 of 1

Report no.: 940891CA160442(1)

CALIBRATION CERTIFICATE OF SOUND CALIBRATOR

Client: Fugro Technical Services Ltd.

Project: Calibration Services

**Client Supplied Information** 

Details of Unit Under Test, UUT

Description

Sound Calibrator

Manufacturer

Casella (Model no. CEL-120/1)

Serial No.

5230742

Next Calibration Date

02-Mar-2017

Specification Limit

±0.5dB

**Laboratory Information** 

Description

Reference Sound Level Meter

Equipment ID.

R-119-1

Date of Calibration:

03-Mar-2016

Ambient Temperature: 21

21 °C

Calibration Location:

Calibration Laboratory of MateriaLab

Method Used

By direct comparison

### Calibration Results:

| Parameters (Setting of UUT) | Mean Value (error of measurement) | Specification Limit(dB) |  |
|-----------------------------|-----------------------------------|-------------------------|--|
| 94dB                        | -0.1 dB                           | ±0.5dB                  |  |
| 114dB                       | -0.3 dB                           | 20.000                  |  |

#### Remarks:

- 1. The equipment used in this calibration is traceable to recognized National Standards.
- 2. The mean value is the average of four measurements.
- 3. The equipment does comply with specification limit.

Checked by:

Date: 43.001%

Certified by

Date:

07 MAR 2016

Kwok Chi Wa (Assistant Manager)

\*\* End of Report \*\*

### **FUGRO TECHNICAL SERVICES LIMITED**

Fugro Development Centre. 5 Lok Yi Street, Tai Lam, Tuen Mun, N.T., Hong Kong.

: +852 2450 8233 Fax : +852 2450 6138 E-mail: matlab@fugro.com Website: www.materialab.com



Report no.: 161966CA160797

Page 1 of 1

# CALIBRATION CERTIFICATE OF SOUND CALIBRATOR

Client: MateriaLab Consultants Ltd.

Address: Room 723 & 725, 7F., Block B Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Chung, N.T.

Project: Calibration Services

### **Client Supplied Information**

Details of Unit Under Test, UUT

Description

Sound Calibrator

Manufacturer

Casella (Model no. CEL-120/1)

Serial No.

5230736

**Next Calibration Date** 

20-Apr-2017

Specification Limit

±0.5dB

### **Laboratory Information**

Description

Reference Sound Level Meter

Equipment ID. :

R-119-1

Date of Calibration:

21-Apr-2016

Ambient Temperature: 21

°C

Calibration Location:

Calibration Laboratory of MateriaLab

Method Used

By direct comparison

#### Calibration Results:

| Parameters (Setting of UUT) | Mean of Measured value | Specification Limit(dB) |
|-----------------------------|------------------------|-------------------------|
| 94dB                        | 93.9 dB                | ±0.5dB                  |
| 114dB                       | 114.1 dB               | ±0.3dB                  |

### Remarks:

- 1. The equipment used in this calibration is traceable to recognized National Standards.
- 2. The mean value is the average of four measurements.
- 3. The equipment does comply with specification limit.

Date: 7 6-72-16 Certified by

Date:

2 2 APR 2016

CA-R-297 (22/07/2009)

Kwok Chi Wa (Assistant Manager)

\*\* End of Report \*\*



#### Certificate of Conformance and Calibration for

### **CEL-120 Acoustic Calibrator**

Applicable Standards :-IEC 60942: 2003 & ANSI S1.40: 2006

CEL-120/1 Class 1

CEL-120/2 Class 2

Serial No: 4358251

Firmware: 03

Temperature: 22.0 °C Pressure: 999.5 mb %RH 55.0

| Frequency = $1.00$ kHz $\pm$ 2Hz<br>T.H.D. = $< 1\%$ | Calibration Level |
|------------------------------------------------------|-------------------|
| SPL @ 114.0dB Setting                                | 113.99 dB         |
| SPL @ 94.0dB Setting                                 | 93-92 dB/N.A      |

Engineer: - W- Durces Date: 12 MAY 2016

Company test equipment and acoustic working standards, used for conformance testing, are subject to periodic calibration, traceable to UK national standards, in accordance with the company's ISO9001 Quality System.

DECLARATION OF CONFORMITY

This certificate confirms that the instrument specified above has been produced and tested to comply with the manufacturer's published specifications and the relevant European Community CE directives.

Casella CEL ( U.K. ),
Regent House, Wolseley Road, Kempston, Bedford. MK42 7JY
Phone: +44 (0) 1234 844100 Fax: +44 (0) 1234 841490
E-mail: info@casellace.om
Web: www.casellameasurement.com

198032A-01



# Certificate of Conformity and Calibration

CEL-633A Instrument Model:-3756127 Serial Number

V129-09 Firmware revision

**CEL-495** Preamplifier Type:-**CEL-251** Microphone Type:-003036 Serial Number 1231 Serial Number

Instrument Class/Type:-1

#### Applicable standards:-

IEC 61672: 2002 / EN 60651 (Electroacoustics - Sound Level Meters) IEC 60651 1979 (Sound Level Meters), ANSI S1.4: 1983 (Specifications For Sound Level Meters)

Note:- The test sequences performed in this report are in accordance with the current Sound level meter Standard - IEC61672. The combination of tests performed are considered to confirm the products electro-acoustic performance to all applicable standards including superceeded Sound Level Meter Standards - IEC60651 and IEC60804.

Test Conditions:-25 °C Test Engineer:-Millie Duncan February 2, 2016 52 %RH Date of Issue:-

1010 mBar



#### Declaration of conformity:-

This test certificate confirms that the instrument specified above has been successfully tested to comply with the manufacturer's published specifications. Tests are performed using equipment traceable to national standards in accordance with Casella's ISO 9001:2008 quality procedures. This product is certified as being compliant to the requirements of the CE Directive.


#### Test Summary:-

All Tests Pass Self Generated Noise Test All Tests Pass Electrical Signal Test Of Frequency Weightings All Tests Pass Frequency & Time Weightings At 1 kHz **All Tests Pass** Level Linearity On The Reference Level Range All Tests Pass Toneburst Response Test **All Tests Pass** C-peak Sound Levels **All Tests Pass** Overload Indication **All Tests Pass** Acoustic Tests

## Combined Electro-Acoustic Frequency Response - A Weighted

Combined Electro-Acoustic Frequency Response - A Weighted (IEC 61672-3:2006)

The following A-Weighted frequency response graph shows this instruments overall frequency response based upon the application of multi-frequency pressure field calibrations. The microphones Pressure to Free field correction coefficients are applied to pressure response. Reference level taken at 1kHz.

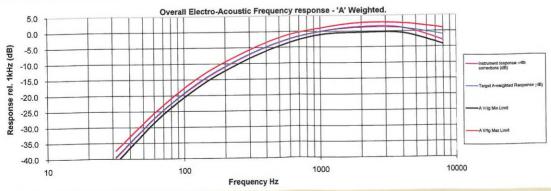

Casella CEL Regen House, Wolseley Road, Kempston, Bedford MK42 7JY

Phone: +44(0) 1234 844100 Fax: +44(0) 1234 841490

Fax: +44(0) 1234 841490 E-mail: info@casellameasurement.com www.casellameasurement.com

Casella CEL. Inc. a subsidiary of IDEAL Industries, Inc.

415 Lawrence Bell Drive Unit 4 Buffalo NY 14221

Toll Free. (800) 366-2966

(603) 672-0031 Fax: (603) 672-8053

E-mail: Web: info@casellausa.com www.casellausa.com



# Certificate of Conformity and Calibration

Instrument Model:-

CEL-633A

Serial Number Firmware revision 3756084 V129-09

Microphone Type:-Serial Number CEL-251

1257

Preamplifier Type:-

CEL-495 003538

Instrument Class/Type:-

1

#### Applicable standards:-

IEC 61672: 2002 / EN 60651 (Electroacoustics - Sound Level Meters)

IEC 60651 1979 (Sound Level Meters), ANSI S1.4: 1983 (Specifications For Sound Level Meters)

Note:- The test sequences performed in this report are in accordance with the current Sound level meter Standard - IEC61672. The combination of tests performed are considered to confirm the products electro-acoustic performance to all applicable standards including superceeded Sound Level Meter Standards - IEC60651 and IEC60804.

Test Conditions:-

25 °C 52 %RH

Test Engineer:-Date of Issue:- Millie Duncan

1010 mBar

February 2, 2016

#### Declaration of conformity:-

This test certificate confirms that the instrument specified above has been successfully tested to comply with the manufacturer's published specifications. Tests are performed using equipment traceable to national standards in accordance with Casella's ISO 9001:2008 quality procedures. This product is certified as being compliant to the requirements of the CE Directive.


#### Test Summary:-

**All Tests Pass** Self Generated Noise Test All Tests Pass Electrical Signal Test Of Frequency Weightings All Tests Pass Frequency & Time Weightings At 1 kHz **All Tests Pass** Level Linearity On The Reference Level Range All Tests Pass Toneburst Response Test **All Tests Pass** C-peak Sound Levels **All Tests Pass** Overload Indication All Tests Pass Acoustic Tests

# Combined Electro-Acoustic Frequency Response - A Weighted

Combined Electro-Acoustic Frequency Response - A Weighted (IEC 61672-3:2006)

The following A-Weighted frequency response graph shows this instruments overall frequency response based upon the application of multi-frequency pressure field calibrations. The microphones Pressure to Free field correction coefficients are applied to pressure response. Reference level taken at 1kHz.

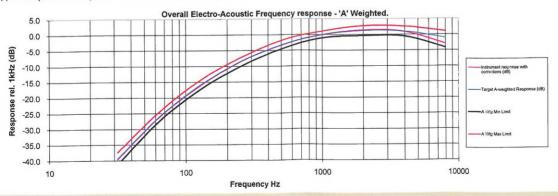

Casella CEL Regen House, Wolseley Road, Kempston, Bedford MK42 7JY

Phone: +44(0) 1234 844100

Fax: +44(0) 1234 841490 E-mail: info@casellameasurement.com Web: www.casellameasurement.com Casella CEL. Inc. a subsidiary of IDEAL Industries, Inc.

415 Lawrence Bell Drive

Buffalo. NY 14221

Toll Free. (800) 366-2966 Tel: (603) 672-0031 Fax: (603) 672-8053

E-mail: info@casellausa.com Web: www.casellausa.com

#### FUGRO TECHNICAL SERVICES LIMITED

Fugro Development Centre. 5 Lok Yi Street, Tai Lam, Tuen Mun, N.T., Hong Kong.

Tel : +852 2450 8233 : +852 2450 6138 Fax E-mail: matlab@fugro.com Website: www.materialab.com.hk



Report no.: 161966CA162338

Page 1 of 1

# CALIBRATION CERTIFICATE OF SOUND LEVEL METER

#### Client Supplied Information

Client: MateriaLab Consultants Ltd.

Address: Room 723 & 725, 7/F., Block B Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Chung, N.T.

Project: Calibration Services Details of Unit Under Test, UUT

Description

Sound Level Meter

Manufacturer

Casella

Model No.

Casella (Model no. CEL-63X(meter), CEL-251(microphone), CEL-495(Preamplifier))

Serial No.

2451028 (meter), 01231(microphone), 002850 (Preamplifier))

Next Calibration Date

16-Nov-2017

Specification Limit

EN 61672: 2003 Type 1

#### Laboratory Information

Description

B & K Acoustic Multifunction Calibrator 4226 (Traditional free field setting)

Equipment ID.

R-108-1

Date of Calibration:

17-Nov-2016

Ambient Temperature: 22 °C

Calibration Location:

Calibration Laboratory of MateriaLab

Method Used

By direct comparison

#### Calibration Results:

| Parame               | eters       | Mean Value (dB) | Specific | ation | Limit(dB) |
|----------------------|-------------|-----------------|----------|-------|-----------|
|                      | 4000Hz      | 2.6             | 2.6      | to    | -0.6      |
|                      | 2000Hz      | 0.8             | 2.8      | to    | -0.4      |
|                      | 1000Hz      | -1.0            | 1.1      | to    | -1.1      |
| A-weighing frequency | 500Hz       | -4.5            | -1.8     | to    | -4.6      |
| response             | 250Hz       | -9.9            | -7.2     | to    | -10.0     |
|                      | 125Hz       | -17.3           | -14.6    | to    | -17.6     |
|                      | 63Hz        | -27.3           | -24.7    | to    | -27.7     |
|                      | 31.5Hz      | -39.5           | -37.4    | to    | -41.4     |
| Differential level   | 94dB-104dB  | 0.0             |          | ± 0.6 | 3         |
| linearity            | 104dB-114dB | 0.0             |          | ± 0.6 | 3         |

#### Remarks:

- 1. The equipment used in this calibration is traceable to recognized National Standards.
- 2. The mean value is the average of four measurements.
- 3. For calibration: Reference SPL are 94, 104 & 114dB, range setting is 20-140dB & time weighing is fast
- 4. The equipment does comply with EN 61672: 2003 Type 1 sound level meter for the above measurement.

Checked by:

Date: WIF DOLG Certified by:

CA-R-297 (22/07/2009)

\*\* End of Report

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong.. : (852)-24508238 : (852)-24508032 Fax Email : mcl@fugro.com.hk



# Appendix E

**Environmental Monitoring Schedule** 

Room 723 & 725, 7/F, Block B,

Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Fax

: (852)-24508238 : (852)-24508032 Hong Kong. Email : mcl@fugro.com.hk



**Project:** KL/2014/03 - Kai Tak Development - Stage 3 Infrastructure Works for Developments at the **Southern Part of the Former Runway** 

Impact Monitoring Schedule (January 2017)

| Sun       | Mon                                      | Tue                                      | Wed                                      | Thur                                    | Fri                                      | Sat |
|-----------|------------------------------------------|------------------------------------------|------------------------------------------|-----------------------------------------|------------------------------------------|-----|
| 1 January | 2                                        | 3                                        | 4                                        | 5<br>TSP Monitoring<br>Noise Monitoring | 6                                        | 7   |
| 8         | 9                                        | 10                                       | 11<br>TSP Monitoring<br>Noise Monitoring | 12                                      | 13                                       | 14  |
| 15        | 16                                       | 17<br>TSP Monitoring<br>Noise Monitoring | 18                                       | 19                                      | 20                                       | 21  |
| 22        | 23<br>TSP Monitoring<br>Noise Monitoring | 24                                       | 25                                       | 26                                      | 27<br>TSP Monitoring<br>Noise Monitoring | 28  |
| 29        | 30                                       | 31                                       |                                          |                                         |                                          |     |

- 1. Monitoring Locations KTD1a: Centre of Excellence in Paediatric (Children's Hospital), KTD2a: G/IC Zone next to Kwun Tong Bypass (Future at Site 3C1), KER1b: Site Boundary at Cheung Yip Street, close to open space car park area
- 2. TSP Monitoring: 24-hours TSP Monitoring per 6 days, and 3 x 1-hour TSP Monitoring per 6 days (as required in case of complaints)
- 3. Noise Monitoring: Leg (30 min) between 0700 and 1900 hours.

Room 723 & 725, 7/F, Block B,

Profit Industrial Building,

: (852)-24508238 1-15 Kwai Fung Crescent, Kwai Fong, : (852)-24508032 Fax Hong Kong. Email: mcl@fugro.com.hk



**Project:** KL/2014/03 - Kai Tak Development - Stage 3 Infrastructure Works for Developments at the **Southern Part of the Former Runway** 

Impact Monitoring Schedule (February 2017)

| Sun | Mon                                      | Tue                                      | Wed                                     | Thur                                    | Fri | Sat                                      |
|-----|------------------------------------------|------------------------------------------|-----------------------------------------|-----------------------------------------|-----|------------------------------------------|
|     |                                          |                                          | 1 February                              | 2<br>TSP Monitoring<br>Noise Monitoring | 3   | 4                                        |
| 5   | 6                                        | 7                                        | 8<br>TSP Monitoring<br>Noise Monitoring | 9                                       | 10  | 11                                       |
| 12  | 13                                       | 14<br>TSP Monitoring<br>Noise Monitoring | 15                                      | 16                                      | 17  | 18                                       |
| 19  | 20<br>TSP Monitoring<br>Noise Monitoring | 21                                       | 22                                      | 23                                      | 24  | 25<br>TSP Monitoring<br>Noise Monitoring |
| 26  | 27                                       | 28                                       |                                         |                                         |     |                                          |

- 1. Actual monitoring may be subjected to change due to any safety concern or adverse weather condition
- 2. Monitoring Locations KTD1a: Centre of Excellence in Paediatric (Children's Hospital), KTD2a: G/IC Zone next to Kwun Tong Bypass (Future at Site 3C1), KER1b: Site Boundary at Cheung Yip Street, close to open space car park area
- 3. TSP Monitoring: 24-hours TSP Monitoring per 6 days, and 3 x 1-hour TSP Monitoring per 6 days (as required in case of complaints)
- 4. Noise Monitoring: Leq (30 min) between 0700 and 1900 hours.

Room 723 & 725, 7/F, Block B,

Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong,

: (852)-24508238 : (852)-24508032 Fax Hong Kong. Email: mcl@fugro.com.hk



KL/2014/03 - Kai Tak Development - Stage 3 Infrastructure Works for Developments at the **Project: Southern Part of the Former Runway** 

Impact Monitoring Schedule (March 2017)

| Sun | Mon                                      | Tue                                      | Wed                                      | Thur                                    | Fri                                     | Sat |
|-----|------------------------------------------|------------------------------------------|------------------------------------------|-----------------------------------------|-----------------------------------------|-----|
|     |                                          |                                          | 1 March                                  | 2                                       | 3<br>TSP Monitoring<br>Noise Monitoring | 4   |
| 5   | 6                                        | 7                                        | 8                                        | 9<br>TSP Monitoring<br>Noise Monitoring | 10                                      | 11  |
| 12  | 13                                       | 14                                       | 15<br>TSP Monitoring<br>Noise Monitoring | 16                                      | 17                                      | 18  |
| 19  | 20                                       | 21<br>TSP Monitoring<br>Noise Monitoring | 22                                       | 23                                      | 24                                      | 25  |
| 26  | 27<br>TSP Monitoring<br>Noise Monitoring | 28                                       | 29                                       | 30                                      | 31                                      |     |

- 1. Actual monitoring may be subjected to change due to any safety concern or adverse weather condition
- 2. Monitoring Locations KTD1a: Centre of Excellence in Paediatric (Children's Hospital), KTD2a: G/IC Zone next to Kwun Tong Bypass (Future at Site 3C1), KER1b: Site Boundary at Cheung Yip Street
- 3. TSP Monitoring: 24-hours TSP Monitoring per 6 days, and 3 x 1-hour TSP Monitoring per 6 days (as required in case of complaints)
- 4. Noise Monitoring: Leq (30 min) between 0700 and 1900 hours.

Room 723 & 725, 7/F, Block B,

Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong.

Tel : (852)-24508238 Fax : (852)-24508032 Email : mcl@fugro.com.hk



Project: <u>KL/2014/03 - Kai Tak Development – Stage 3 Infrastructure Works for Developments at the Southern Part of the Former Runway</u>

**Impact Monitoring Schedule (April 2017)** 

| Sun | Mon | Tue                                      | Wed                                      | Thur                                     | Fri                                     | Sat                                           |
|-----|-----|------------------------------------------|------------------------------------------|------------------------------------------|-----------------------------------------|-----------------------------------------------|
|     |     |                                          |                                          |                                          |                                         | 1 April<br>TSP Monitoring<br>Noise Monitoring |
| 2   | 3   | 4                                        | 5                                        | 6                                        | 7<br>TSP Monitoring<br>Noise Monitoring | 8                                             |
| 9   | 10  | 11                                       | 12                                       | 13<br>TSP Monitoring<br>Noise Monitoring | 14                                      | 15                                            |
| 16  | 17  | 18                                       | 19<br>TSP Monitoring<br>Noise Monitoring | 20                                       | 21                                      | 22                                            |
| 23  | 24  | 25<br>TSP Monitoring<br>Noise Monitoring | 26                                       | 27                                       | 28                                      | 29                                            |
| 30  |     |                                          |                                          |                                          |                                         |                                               |

- 1. Actual monitoring may be subjected to change due to any safety concern or adverse weather condition
- 2. Monitoring Locations KTD1a: Centre of Excellence in Paediatric (Children's Hospital), KTD2a: G/IC Zone next to Kwun Tong Bypass (Future at Site 3C1), KER1b: Site Boundary at Cheung Yip Street
- 3. TSP Monitoring: 24-hours TSP Monitoring per 6 days, and 3 x 1-hour TSP Monitoring per 6 days (as required in case of complaints)
- 4. Noise Monitoring: Leq (30 min) between 0700 and 1900 hours.

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong.. : (852)-24508238 : (852)-24508032 Fax : mcl@fugro.com.hk Email



# Appendix F

**Air Quality Monitoring Data** 

# 24-hour TSP Monitoring Result for Kai Tak Development - Stage 3 Infrastructure Works for Developments at the Southern Part of the Former Runway

KTD1a - Centre of Excellence in Paediatrics (Children's Hospital)

| Start Date |           | Air<br>Temperature | Atmospheric<br>Pressure, Pa | Filter W | eight (g) | Particulate weight (g) |          |         |       | Average<br>flow | Total<br>volume  | Conc.<br>(ug/m³) | Action<br>Level      | Limit<br>Level       |
|------------|-----------|--------------------|-----------------------------|----------|-----------|------------------------|----------|---------|-------|-----------------|------------------|------------------|----------------------|----------------------|
|            | Condition | (K)                | (mmHg)                      | Initial  | Final     | weight (g)             | Time(ms) | Initial | Final | (m³/min.)       | (m <sup>3)</sup> | (ug/III )        | (ug/m <sup>3</sup> ) | (ug/m <sup>3</sup> ) |
| 5-Jan-17   | Fine      | 294.1              | 762.7                       | 2.7920   | 3.1287    | 0.3367                 | 24       | 1.65    | 1.64  | 1.64            | 2365.5           | 142              |                      |                      |
| 11-Jan-17  | Fine      | 292.1              | 763.6                       | 2.8115   | 3.0863    | 0.2748                 | 24       | 1.72    | 1.60  | 1.66            | 2394.4           | 115              |                      |                      |
| 17-Jan-17  | Cloudy    | 292.2              | 759.1                       | 2.8158   | 3.1709    | 0.3551                 | 24       | 1.65    | 1.70  | 1.68            | 2714.7           | 131              | 177                  | 260                  |
| 23-Jan-17  | Fine      | 289.8              | 769.3                       | 2.8199   | 2.9973    | 0.1774                 | 24       | 1.37    | 1.34  | 1.36            | 2017.9           | 88               |                      |                      |
| 27-Jan-17  | Fine      | 290.5              | 767.0                       | 2.8149   | 2.8530    | 0.0381                 | 24       | 1.53    | 1.51  | 1.52            | 2189.2           | 17               |                      |                      |
|            |           |                    |                             |          |           |                        |          |         |       |                 | Min              | 17               |                      |                      |
|            |           |                    |                             |          |           |                        |          |         |       |                 | Max              | 142              |                      |                      |

KTD2a - G/IC Zone next to Kwun Tong Bypass (Future Hospital at Site 3C1)

| KIDZa - G/ | ic zone ne | ext to Kwun Ton | ig bypass (ru | ture nosp  | itai at Site | : 301)      |             |         |       |           |                  |         |                      |                      |
|------------|------------|-----------------|---------------|------------|--------------|-------------|-------------|---------|-------|-----------|------------------|---------|----------------------|----------------------|
|            | Weather    | Air             | Atmospheric   | Filtor W   | eight (g)    | Particulate | Compling    | Flow    | Rate  | Average   | Total            | Conc.   | Action               | Limit                |
| Start Date |            | Temperature     | Pressure, Pa  | I IIICI VV | eigiii (g)   | weight (g)  |             |         | min.) | flow      | volume           |         | Level                | Level                |
|            | Condition  | (K)             | (mmHg)        | Initial    | Final        | weight (g)  | 11116(1113) | Initial | Final | (m³/min.) | (m <sup>3)</sup> | (ug/m³) | (ug/m <sup>3</sup> ) | (ug/m <sup>3</sup> ) |
| 5-Jan-17   | Fine       | 294.1           | 762.7         | 2.7854     | 2.8777       | 0.0923      | 24          | 1.58    | 1.57  | 1.58      | 2269.2           | 41      |                      |                      |
| 11-Jan-17  | Fine       | 292.1           | 763.6         | 2.8064     | 3.0296       | 0.2232      | 24          | 1.67    | 1.64  | 1.65      | 2381.0           | 94      |                      |                      |
| 17-Jan-17  | Cloudy     | 292.2           | 759.1         | 2.8233     | 2.9348       | 0.1115      | 24          | 1.59    | 1.57  | 1.58      | 2270.4           | 49      | 157                  | 260                  |
| 23-Jan-17  | Fine       | 289.8           | 769.3         | 2.8347     | 3.0250       | 0.1903      | 24          | 1.53    | 1.49  | 1.51      | 2178.1           | 87      |                      |                      |
| 27-Jan-17  | Fine       | 290.5           | 767.0         | 2.8187     | 2.8767       | 0.0580      | 24          | 1.60    | 1.57  | 1.58      | 2281.2           | 25      |                      |                      |
|            |            | •               |               | •          |              | •           |             |         |       |           | Min              | 25      |                      |                      |

KER1b - Site Boundary at Cheung Yip Street

|            |           | .,                 |                             |          |           |             |           |         |       |              |                  |         |                      |                      |
|------------|-----------|--------------------|-----------------------------|----------|-----------|-------------|-----------|---------|-------|--------------|------------------|---------|----------------------|----------------------|
| Start Date | Weather   | Air<br>Temperature | Atmospheric<br>Pressure, Pa | Filter W | eight (g) | Particulate |           |         |       | Average flow | Total volume     | Conc.   | Action<br>Level      | Limit<br>Level       |
|            | Condition | (K)                | (mmHg)                      | Initial  | Final     | weight (g)  | rime(nrs) | Initial | Final | (m³/min.)    | (m <sup>3)</sup> | (ug/m³) | (ug/m <sup>3</sup> ) | (ug/m <sup>3</sup> ) |
| 5-Jan-17   | Fine      | 294.1              | 762.7                       | 2.8174   | 2.8884    | 0.0710      | 24        | 1.36    | 1.35  | 1.36         | 1952.4           | 36      |                      |                      |
| 11-Jan-17  | Fine      | 292.1              | 763.6                       | 2.8131   | 2.9646    | 0.1515      | 24        | 1.24    | 1.23  | 1.23         | 1778.0           | 85      |                      |                      |
| 17-Jan-17  | Cloudy    | 292.2              | 759.1                       | 2.8142   | 2.9162    | 0.1020      | 24        | 1.05    | 1.04  | 1.05         | 1506.4           | 68      | 172                  | 260                  |
| 23-Jan-17  | Fine      | 289.8              | 769.3                       | 2.8267   | 3.0051    | 0.1784      | 24        | 1.32    | 1.29  | 1.30         | 1880.9           | 95      |                      |                      |
| 27-Jan-17  | Fine      | 290.5              | 767.0                       | 2.8477   | 2.9274    | 0.0797      | 24        | 1.19    | 1.16  | 1.18         | 1693.6           | 47      |                      |                      |

Min 36

Max 95

Average 66

Average

Max

Average


99


94


59

Note:

<u>Underline</u>: Exceedance of Action Level <u>Underline and Bold</u>: Exceedance of Limit Level

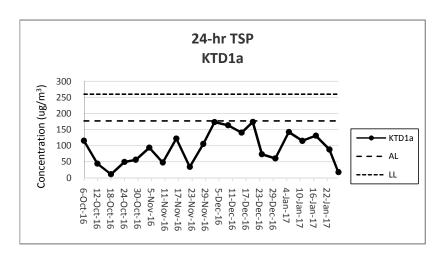

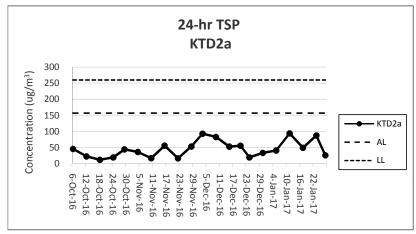

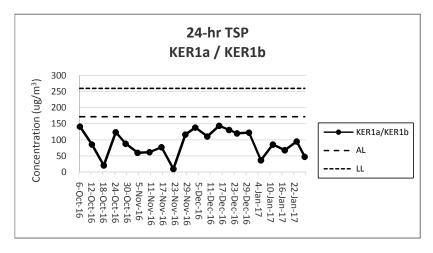

#### Note:

- 1) The major activities being carried out on site during the reporting period can be referred to Section 1.3.2.
- 2) The weather conditions during the reporting period can be referred to Appendix K.
- 3) Any other factors which might affect the monitoing results can be referred to Section 2.6.4.
- 4) QA/QC results, calibration results and detection limits can be referred to Appendix D.
- 5) The 24-hour TSP monitoring location KER1a was replaced by KER1b, effective from 16 November 2016.

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong.. : (852)-24508238 : (852)-24508032 Fax : mcl@fugro.com.hk Email



Appendix G

**Noise Monitoring Data** 

#### **Noise Impact Monitoring Result for** Kai Tak Development - Stage 3 Infrastructure Works for **Developments at the Southern Part of the Former Runway**

KTD 1a: Centre of Excellence in Paediatrics (Children's Hospital)

| Date      | Start Time | Leq 30min<br>dB(A) | L10<br>dB(A) | L90<br>dB(A) | Wind Speed<br>(m/s) | Weather |
|-----------|------------|--------------------|--------------|--------------|---------------------|---------|
| 5-Jan-17  | 11:47      | 67                 | 69           | 66           | 0.3                 | Fine    |
| 11-Jan-17 | 9:45       | 73                 | 76           | 71           | 0.6                 | Fine    |
| 17-Jan-17 | 10:35      | 70                 | 73           | 66           | 1.6                 | Cloudy  |
| 23-Jan-17 | 13:25      | 67                 | 69           | 65           | 1.4                 | Fine    |
| 27-Jan-17 | 10:52      | 68                 | 69           | 65           | 0.6                 | Fine    |
|           | Max        | 73                 |              |              |                     |         |
|           | Min        | 67                 |              |              |                     |         |

KTD 2a: G/IC Zone next to Kwun Tong Bypass (Future Hospital at Site 3C1)

| Date      | Start Time | Leq 30min<br>dB(A) | L10<br>dB(A) | L90<br>dB(A) | Wind Speed<br>(m/s) | Weather |
|-----------|------------|--------------------|--------------|--------------|---------------------|---------|
| 5-Jan-17  | 12:20      | 69                 | 71           | 68           | 0.3                 | Fine    |
| 11-Jan-17 | 10:30      | 64                 | 65           | 63           | 0.6                 | Fine    |
| 17-Jan-17 | 10:00      | 67                 | 69           | 64           | 0.7                 | Cloudy  |
| 23-Jan-17 | 12:45      | 64                 | 65           | 63           | 0.6                 | Fine    |
| 27-Jan-17 | 10:10      | 64                 | 66           | 62           | 1.5                 | Fine    |
|           | Max        | 69                 |              |              |                     |         |
|           | Min        | 64                 |              |              |                     |         |

Min

Limit Level

Limit Level

Limit Level

| NER 10: Site E | Soundary at Che | <u> </u>  | ,     |       |            |         |
|----------------|-----------------|-----------|-------|-------|------------|---------|
|                |                 | Leq 30min | L10   | L90   | Wind Speed |         |
| Date           | Start Time      | dB(A)     | dB(A) | dB(A) | (m/s)      | Weather |
| 5-Jan-17       | 13:00           | 65        | 67    | 60    | 0.3        | Fine    |
| 11-Jan-17      | 9:00            | 69        | 71    | 66    | 0.6        | Fine    |
| 17-Jan-17      | 11:22           | 67        | 69    | 64    | 0.5        | Cloudy  |
| 23-Jan-17      | 14:05           | 73        | 75    | 70    | 0.7        | Fine    |
| 27-Jan-17      | 11:30           | 72        | 75    | 69    | 0.8        | Fine    |
|                | Max             | 73        |       |       |            |         |

Note:


KTD1a: Façade Measurement


KTD2a & KER1b: Free-field measurement (+3dB(A) correction has been applied)


No raining or wind with speed over 5 m/s was observed during noise monitoring according to the onsite observation.

65

75

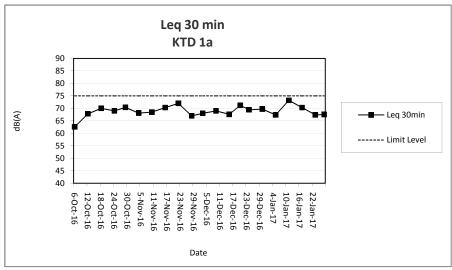

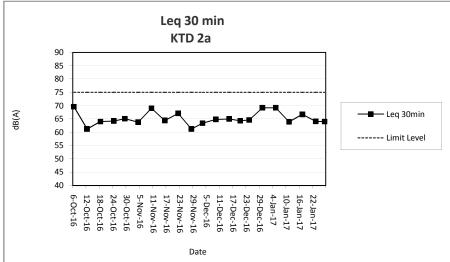

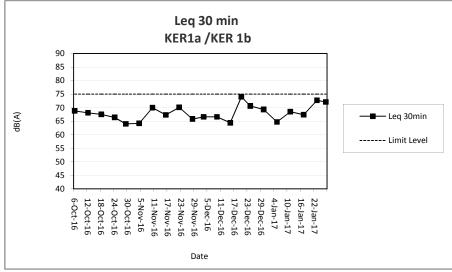

#### Note

- 1) The major activities being carried out on site during the reporting period can be referred to Section 1.3.2.
- 2) The weather conditions during the reporting period can be referred to Appendix K.
- 3) Any other factors which might affect the monitoing results can be referred to Section 3.7.2.
- 4) QA/QC results, calibration results and detection limits can be referred to Appendix D.
- 5) Noise monitoring location KER1a was replaced by KER1b, effective from 16 November 2016.

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong.. : (852)-24508238 : (852)-24508032 Fax : mcl@fugro.com.hk Email



Appendix H

**Events and Action Plan** 

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong.. : (852)-24508238 : (852)-24508032 : mcl@fugro.com.hk Tel Fax Email



|                                                 | Plan for Construct                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                         | TON                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                   |
|-------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EVENT                                           | ET                                                                                                                                                                                                                                                                                                                                                                                                               | IEC                                                                                                                                                                                                                                                                                                     | ER                                                                                                                                                                                                                                                                               | Contractor                                                                                                                                                                                                                                                                                                        |
| Action Level                                    |                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                   |
| Exceedance for one sample.                      | I. Identify sources, investigate the causes of complaint and propose remedial measures.     Inform IEC and ER.     Repeat measurement to confirm finding;.     Increase monitoring frequency                                                                                                                                                                                                                     | Check monitoring data submitted by the ET.     Check the Contractor's working methods.                                                                                                                                                                                                                  | Notify the Contractor.                                                                                                                                                                                                                                                           | Rectify any unacceptable practices.     Amend working methods agreed with the ER as appropriate.                                                                                                                                                                                                                  |
| Exceedance for two or more consecutive samples. | 1.Identify sources. 2.Inform the IEC and ER. 3.Advise the ER on the effectiveness of the proposed remedial measures; 4.Repeat measurements to confirm findings. 5.Increase monitoring frequency to daily. 6.Discuss with the IEC, ER and Contractor on remedial action required. 7.If exceedance continues, arrange meeting with the IEC, Contractor and ER. 8.If exceedance stops, cease additional monitoring. | 1. Check monitoring data submitted by the ET. 2. Check the Contractor's working methods. 3. Discuss with the ET, ER and Contractor on possible remedial measures if required. 4. Advise the ER on the effectiveness of proposed remedial measures if required.                                          | Notify the Contractor.     Ensure remedial measures properly implemented.                                                                                                                                                                                                        | 1. Submit proposals for remedial action to the ER within 3 working days of notification. 2. Implement the agreed proposals. 3. Amend proposal as appropriate                                                                                                                                                      |
| Limit Level Exceedance for one sample.          | 1. Identify sources, investigate causes of exceedance and proposed remedial measures. 2. Inform the IEC, ER, and Contractor. 3. Repeat measurement to confirm finding. 4. 4. Increase monitoring frequency to daily. 5. Assess effectiveness of the Contractor's remedial action and keep the IEC and ER informed of the results                                                                                 | 1. Check monitoring data submitted by the ET. 2. Check the Contractor's working methods. 3. Discuss with the ET, ER and Contractor on possible remedial measures. 4. Advise the ER and ET on the effectiveness of the proposed remedial measures. 5. Supervise the implementation of remedial measures. | Confirm receipt of the notification of exceedance in writing.     Notify the Contractor.     Ensure remedial measures are properly implemented.                                                                                                                                  | 1. Take immediate action to avoid further exceedance. 2. Submit proposals for remedial action to the ER and copy to the ET and IEC within 3 working days of notification. 3. Implement the agreed proposals. 4. Amend proposal as appropriate.                                                                    |
| Exceedance for two or more consecutive samples  | 1. Notify the IEC, ER and Contractor. 2. Identify sources. 3. Repeat measurements to confirm findings. 4. Increase monitoring frequency to daily. 5. Carry out analysis of the Contractor's working procedures with the ER to determine the possible mitigation to be implemented. 6. Arrange meeting with the IEC and ER to                                                                                     | Discuss amongst the ER, ET and Contractor on the potential remedial action.     Review the Contractor's remedial action whenever necessary to assure their effectiveness and advise the ER and ET accordingly.     Supervise the implementation of remedial measures.                                   | Confirm receipt of the notification of exceedance in writing.     Notify the Contractor.     In consultation with the IEC and ET, agree with the Contractor on the remedial measures to be implemented.     Ensure remedial measures are properly implemented.     If exceedance | Take immediate action to avoid further exceedance.     Submit proposals for remedial action to the ER and copy to the IEC and ET within 3 working days of notification.     Implement the agreed proposals.     Resubmit proposals if problems still not under control.     Stop the relevant portion of works as |

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong.. : (852)-24508238 : (852)-24508032 : mcl@fugro.com.hk Tel Fax Email



| EVENT |                                                                                                                                                                                                                      | ACT | ION                                                                                                                                                |                                                            |
|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|----------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|
| EVENT | ET                                                                                                                                                                                                                   | IEC | ER                                                                                                                                                 | Contractor                                                 |
|       | discuss the remedial action to be taken.  7. Assess the effectiveness of the Contractor's remedial action and keep the IEC, EPD and ER informed of the results.  8. If exceedance stops, cease additional monitoring |     | continues, consider what portion of works is responsible and instruct the Contractor to stop that portion of works until the exceedance is abated. | determined by the ER<br>until the exceedance is<br>abated. |

Room 723 & 725, 7/F, Block B,

Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong.. Tel : (852)-24508238 Fax : (852)-24508032 Email : mcl@fugro.com.hk



**Event and Action Plan for Noise Impact** 

|              | 1 Plan for Noise imp                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                      | ΓΙΟΝ                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                       |
|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EVENT        | ET                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | IEC                                                                                                                                                                                                                                                                  | ER                                                                                                                                                                                                                                                                                                                                                                                                      | Contractor                                                                                                                                                                                                                                                                                                                                                            |
| Action Level | 1.Notify the IEC, ER and Contractor.     2.Carry out investigation.     3.Report the results of investigation to the IEC and Contractor.     4.Discuss jointly with the ER and Contractor and formulate remedial measures.     5.Increase the monitoring frequency to check the mitigation effectiveness                                                                                                                                                                                                               | Review the monitoring data submitted by the ET.     Review the construction methods and proposed redial measures by the Contractor, and advise the ET and ER if the proposed remedial measures would be sufficient                                                   | Notify the Contractor.     Require the     Contractor to propose     remedial measures     for implementation if     required.                                                                                                                                                                                                                                                                          | Submit noise mitigation proposals to the ER and copy to the IEC and ET.     Implement noise mitigation proposals.                                                                                                                                                                                                                                                     |
| Limit Level  | 1.Notify the IEC, ER and Contractor. 2.Identify sources. 3.Repeat measurements to confirm findings. 4.Carry out analysis of the Contractor's working procedures with the ER and Contractor to determine possible mitigations to be implemented. 5.Record the causes and action taken for the exceedances. 6.Increase the monitoring frequency. 7.Assess the effectiveness of the Contractor's remedial action with the ER and keep the IEC informed of the results. 8.If exceedance stops, cease additional monitoring | 1.Discuss amongst the ER, ET and Contractor on the potential remedial action.     2.Review the Contractor's remedial action whenever necessary to assure their effectiveness and advise the ER accordingly.     3.Supervise the implementation of remedial measures. | 1. Confirm receipt of notification of exceedance in writing. 2. Notify the Contractor. 3. Require the Contractor to propose remedial measures for the analysed noise problems. 4. Ensure remedial measures are properly implemented. 5. If exceedance continues, consider what portion of work is responsible and instruct the Contractor to stop that portion of works until the exceedance is abated. | 1. Take immediate action to avoid further exceedance. 2. Submit proposals for remedial action to the ER and copy to the ET and IEC within 3 working days of notification. 3. Implement the agreed proposals. 4. Resubmit proposals if problems still not under control. 5. Stop the relevant portion of works as determined by the ER until the exceedance is abated. |

Room 723 & 725, 7/F, Block B,

Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong.. : (852)-24508238 : (852)-24508032 Fax : mcl@fugro.com.hk Email



Event and Action Plan for Landscape and Visual Impact

| EVENT                          |                                                                                                                                                                                                                                                                             | ACT                                                                                                                                                                                                                                                                                      | TION                                                                                |                                                                                  |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
| EVENT                          | ET                                                                                                                                                                                                                                                                          | IEC                                                                                                                                                                                                                                                                                      | ER                                                                                  | Contractor                                                                       |
| Non-conformity on one occasion | 1. Identify Source     2. Inform the IEC and the ER     3. Discuss remedial actions with the IEC, the ER and the Contractor     4. Monitor remedial actions until rectification has been completed                                                                          | Check report     Check the     Contractor's working     method     Discuss with the ET     and the Contractor on     possible remedial     measures     Advise the ER on     effectiveness of     proposed remedial     measures.     Check     implementation of     remedial measures. | Notify Contractor     Ensure remedial     measures are     properly implemented     | Amend working methods     Rectify damage and undertake any necessary replacement |
| Repeated Non-<br>conformity    | 1. Identify Source 2. Inform the IEC and the ER 3. Increase monitoring frequency 4. Discuss remedial actions with the IEC, the ER and the Contractor 5. Monitor remedial actions until rectification has been completed 6. If exceedance stops, cease additional monitoring | Check monitoring report     Check the Contractor's working method     Discuss with the ET and the Contractor on possible remedial measures     Advise the ER on effectiveness of proposed remedial measures     Supervise implementation of remedial measures.                           | Notify the Contractor     Ensure remedial     measures are     properly implemented | Amend working methods     Rectify damage and undertake any necessary replacement |

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong.. : (852)-24508238 : (852)-24508032 Tel Fax : mcl@fugro.com.hk Email



Appendix I

**Waste Flow Table** 

Room 723 & 725, 7/F, Block B,

Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong. Tel : (852)-24508238 Fax : (852)-24508032 Email : mcl@fugro.com.hk



| Waste Flow        | Table for Ye                                  | ear 2016                                                   |                           |                          |                            |                          |              |                                  |                          |                   |                                   |
|-------------------|-----------------------------------------------|------------------------------------------------------------|---------------------------|--------------------------|----------------------------|--------------------------|--------------|----------------------------------|--------------------------|-------------------|-----------------------------------|
|                   |                                               | Actual Quantities of Inert C&D Materials Generated Monthly |                           |                          |                            |                          | Actual       | Quantities of Non-               | inert C&D Wast           | es Generated M    | lonthly                           |
| Monthly<br>Ending | Total<br>Quantity<br>Generated<br>(Inert C&D) | Hard Rock and<br>Large Broken<br>Concrete                  | Reused in the<br>Contract | Reused in other Projects | Disposed as<br>Public Fill | Imported Fill            | Metals       | Paper/<br>cardboard<br>packaging | Plastics<br>(see Note 2) | Chemical<br>Waste | Others, e.g.<br>general<br>refuse |
|                   | (in '000m <sup>3</sup> )                      | (in '000m <sup>3</sup> )                                   | (in '000m <sup>3</sup> )  | (in '000m <sup>3</sup> ) | (in '000m <sup>3</sup> )   | (in '000m <sup>3</sup> ) | (in '000 kg) | (in '000kg)                      | (in '000kg)              | (in '000kg)       | (in '000m <sup>3</sup> )          |
| 2016 Jan          | 0.159                                         | 0.101                                                      | 0.058                     | Nil                      | Nil                        | Nil                      | Nil          | 0.023                            | 0.00002                  | 0.0158            | 0.0335                            |
| 2016 Feb          | 0.291                                         | 0.050                                                      | 0.241                     | Nil                      | Nil                        | Nil                      | 1.34         | 0.023                            | 0.00002                  | 0.0158            | 0.0335                            |
| 2016 Mar          | 2.7389                                        | 0.0407                                                     | 0.0662                    | Nil                      | 2.632                      | Nil                      | 5.92         | 0.023                            | 0.00002                  | 0.0158            | 0.0571                            |
| 2016 Apr          | 4.1718                                        | 0.0578                                                     | 0.462                     | Nil                      | 3.652                      | Nil                      | 12.5         | 0.023                            | 0.00002                  | 0.0158            | 0.0426                            |
| 2016 May          | 3.592                                         | Nil                                                        | 0.299                     | Nil                      | 3.293                      | Nil                      | 5.23         | 0.023                            | 0.00002                  | 0.0158            | 0.0621                            |
| 2016 June         | 4.6035                                        | Nil                                                        | 0.8555                    | Nil                      | 3.748                      | Nil                      | Nil          | 0.023                            | 0.00002                  | 0.0158            | 0.0619                            |
| 2016 July         | 6.155                                         | 0.153                                                      | 0.015                     | Nil                      | 5.987                      | Nil                      | 7.84         | 0.023                            | 0.00002                  | 0.0158            | 0.0433                            |
| 2016 Aug          | 5.1155                                        | Nil                                                        | Nil                       | Nil                      | 5.1155                     | Nil                      | 19.93        | 0.023                            | Nil                      | Nil               | 0.0147                            |
| 2016 Sept         | 7.2267                                        | Nil                                                        | Nil                       | Nil                      | 7.2267                     | Nil                      | 33.65        | 0.023                            | Nil                      | Nil               | 0.0103                            |
| 2016 Oct          | 4.6448                                        | Nil                                                        | Nil                       | Nil                      | 4.6448                     | Nil                      | 13.30        | 0.023                            | Nil                      | Nil               | 0.0385                            |
| 2016 Nov          | 6.1626                                        | Nil                                                        | Nil                       | Nil                      | 6.1626                     | Nil                      | 27.06        | 0.023                            | Nil                      | Nil               | 0.0192                            |
| 2016 Dec          | 6.3522                                        | Nil                                                        | Nil                       | Nil                      | 6.3522                     | Nil                      | 13.30        | 0.023                            | Nil                      | Nil               | 0.0121                            |
| Total             | 51.213                                        | 0.4025                                                     | 1.9967                    | Nil                      | 48.8138                    | Nil                      | 140.07       | 0.276                            | 0.00014                  | 0.1106            | 0.4288                            |

#### Note:

<sup>1)</sup> The waste flow table shall also include C&D materials that are specified in the Contract to be imported for use at the Site.

<sup>2)</sup> Plastics refer to plastic bottles/containers, plastic sheets/foam from packaging materials.

Room 723 & 725, 7/F, Block B,

Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong.. Tel : (852)-24508238 Fax : (852)-24508032 Email : mcl@fugro.com.hk



| Waste Flov        | v Table for Ye                                | ear 2017                                  |                           |                          |                            |                          |              |                                  |                          |                   |                                   |
|-------------------|-----------------------------------------------|-------------------------------------------|---------------------------|--------------------------|----------------------------|--------------------------|--------------|----------------------------------|--------------------------|-------------------|-----------------------------------|
|                   |                                               | Actual Quant                              | tities of Inert C&I       | O Materials Gene         | erated Monthly             |                          | Actual (     | Quantities of Non-               | inert C&D Wast           | es Generated M    | lonthly                           |
| Monthly<br>Ending | Total<br>Quantity<br>Generated<br>(Inert C&D) | Hard Rock and<br>Large Broken<br>Concrete | Reused in the<br>Contract | Reused in other Projects | Disposed as<br>Public Fill | Imported Fill            | Metals       | Paper/<br>cardboard<br>packaging | Plastics<br>(see Note 2) | Chemical<br>Waste | Others, e.g.<br>general<br>refuse |
|                   | (in '000m <sup>3</sup> )                      | (in '000m <sup>3</sup> )                  | (in '000m <sup>3</sup> )  | (in '000m <sup>3</sup> ) | (in '000m <sup>3</sup> )   | (in '000m <sup>3</sup> ) | (in '000 kg) | (in '000kg)                      | (in '000kg)              | (in '000kg)       | (in '000m <sup>3</sup> )          |
| 2017 Jan          | 4.2300                                        | Nil                                       | Nil                       | Nil                      | 4.2300                     | Nil                      | 0.015        | 0.023                            | Nil                      | Nil               | 0.0109                            |
|                   |                                               |                                           |                           |                          |                            |                          |              |                                  |                          |                   |                                   |
|                   |                                               |                                           |                           |                          |                            |                          |              |                                  |                          |                   |                                   |
|                   |                                               |                                           |                           |                          |                            |                          |              |                                  |                          |                   |                                   |
|                   |                                               |                                           |                           |                          |                            |                          |              |                                  |                          |                   |                                   |
|                   |                                               |                                           |                           |                          |                            |                          |              |                                  |                          |                   |                                   |
|                   |                                               |                                           |                           |                          |                            |                          |              |                                  |                          |                   |                                   |
|                   |                                               |                                           |                           |                          |                            |                          |              |                                  |                          |                   |                                   |
|                   |                                               |                                           |                           |                          |                            |                          |              |                                  |                          |                   |                                   |
|                   |                                               |                                           |                           |                          |                            |                          |              |                                  |                          |                   |                                   |
|                   |                                               |                                           |                           |                          |                            |                          |              |                                  |                          |                   |                                   |
|                   |                                               |                                           |                           |                          |                            |                          |              |                                  |                          |                   |                                   |
| Total             | 4.2300                                        | Nil                                       | Nil                       | Nil                      | 4.2300                     | Nil                      | 0.015        | 0.023                            | Nil                      | Nil               | 0.0109                            |

#### Note:

- 1) The waste flow table shall also include C&D materials that are specified in the Contract to be imported for use at the Site.
- 2) Plastics refer to plastic bottles/containers, plastic sheets/foam from packaging materials.

Room 723 & 725, 7/F, Block B,

Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, : (852)-24508238 : (852)-24508032 Fax Hong Kong.. Email : mcl@fugro.com.hk



# Appendix J

**Environmental Mitigation Implementation Schedule (EMIS)** 

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong..



| EIA Ref                    | EM&A Ref                                  | Environmental Protection Measures / Mitigation Measures                                                                                                                                                                                                                                                                                   | Who to implement the measure | Location /<br>Timing      | Construction<br>Phase<br>Implementation<br>Status |
|----------------------------|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------|---------------------------------------------------|
| Air Quality Measur         | <u>es</u>                                 |                                                                                                                                                                                                                                                                                                                                           |                              |                           |                                                   |
| New Distributor Ro         | oads Serving the Pla                      | anned KTD                                                                                                                                                                                                                                                                                                                                 |                              |                           |                                                   |
| AEIAR-130/2009<br>\$3.2    | AEIAR 130/2009<br>EM&A Manual<br>S2.2     | 8 times daily watering of the work site with active dust emitting activities.                                                                                                                                                                                                                                                             | Contractor                   | All relevant<br>worksites | Implemented                                       |
| Decommissioning            | of the Radar Station                      | n of the former Kai Tak Airport                                                                                                                                                                                                                                                                                                           |                              |                           | •                                                 |
| AEIAR-130/2009<br>S5.2.19  | AEIAR 130/2009<br>EM&A Manual<br>S4.2.4   | The excavation area should be limited to as small in size as possible and backfilled with clean and/or treated soil shortly after excavation work.  The exposed excavated area should be covered by the tarpaulin during night time.  The top layer soils should be sprayed with fine misting of water immediately before the excavation. | Contractor                   | All relevant<br>worksites | Not Applicable                                    |
| Trunk Road T2              | l                                         |                                                                                                                                                                                                                                                                                                                                           |                              |                           | 1                                                 |
| AEIAR-174/2013<br>S4.9.2.1 | AEIAR-174/2013<br>EM&A Manual<br>S2.3.1.1 | Watering of the construction areas 12 times per day to reduce dust emissions by 91.7%, with reference to the "Control of Open Fugitive Dust Sources" (USEPA AP-42). The amount of water to be applied would be 0.91L/m2 for the respective watering frequency.                                                                            | Contractor                   | All relevant<br>worksites | Implemented                                       |
|                            |                                           | Dust enclosures with watering would be provided along the loading ramps and conveyor belts for unloading the C&D materials to the barge for dust suppression.                                                                                                                                                                             | Contractor                   | All relevant worksites    | Not Applicable                                    |
|                            |                                           | 8 km per hour is the recommended limit of the speed for vehicles on unpaved site roads.                                                                                                                                                                                                                                                   | Contractor                   | All relevant worksites    | Implemented                                       |
|                            |                                           | Good Site Practices                                                                                                                                                                                                                                                                                                                       |                              |                           |                                                   |
| AEIAR-130/2009             | AEIAR 130/2009                            | Stockpiling site(s) should be lined with impermeable sheeting and bunded. Stockpiles should                                                                                                                                                                                                                                               | Contractor                   | All relevant              | Partially                                         |

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong..



| EIA Ref                          | EM&A Ref                         | Environmental Protection Measures / Mitigation Measures                                                                                                                                                                                                                                        | Who to implement the measure | Location /<br>Timing                                                                                                                                                                       | Construction<br>Phase<br>Implementation<br>Status                                                                                                                                        |            |                        |             |  |                                                                                                                                                                                                         |            |                        |             |
|----------------------------------|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|------------------------|-------------|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|------------------------|-------------|
| S3.2, S5.2.19,<br>AEIAR-174/2013 | EM&A Manual<br>S2.2, S4.2, AEIAR | be fully covered by impermeable sheeting to reduce dust emission.                                                                                                                                                                                                                              |                              | worksites                                                                                                                                                                                  | Implemented                                                                                                                                                                              |            |                        |             |  |                                                                                                                                                                                                         |            |                        |             |
| S4.9.2.2                         | 174/2013 EM&A<br>Manual S2.3.1.2 | Use of regular watering to reduce dust emissions from exposed site surfaces and unpaved roads, particularly during dry weather. Use of frequent watering for particularly dusty construction areas and areas close to ASRs.                                                                    | Contractor                   | All relevant<br>worksites                                                                                                                                                                  | Partially<br>Implemented                                                                                                                                                                 |            |                        |             |  |                                                                                                                                                                                                         |            |                        |             |
|                                  |                                  |                                                                                                                                                                                                                                                                                                |                              |                                                                                                                                                                                            | Misting for the dusty material should be carried out before being loaded into the vehicle. Any vehicle with an open load carrying area should have properly fitted side and tail boards. | Contractor | All relevant worksites | Implemented |  |                                                                                                                                                                                                         |            |                        |             |
|                                  |                                  | Material having the potential to create dust should not be loaded from a level higher than the side and tail boards and should be dampened and covered by a clean tarpaulin.                                                                                                                   | Contractor                   | All relevant worksites                                                                                                                                                                     | Implemented                                                                                                                                                                              |            |                        |             |  |                                                                                                                                                                                                         |            |                        |             |
|                                  |                                  | Tarpaulin covering of all dusty vehicle loads transported to, from and between site locations; The tarpaulin should be properly secured and should extent at least 300 mm over the edges of the sides and tailboards. The material should also be dampened if necessary before transportation. | Contractor                   | All relevant<br>worksites                                                                                                                                                                  | Implemented                                                                                                                                                                              |            |                        |             |  |                                                                                                                                                                                                         |            |                        |             |
|                                  |                                  | The vehicles should be restricted to maximum speed of 10 km per hour. Confined haulage and delivery vehicle to designated roadways insider the site. Onsite unpaved roads should be compacted and kept free of lose materials.                                                                 | Contractor                   | All relevant worksites                                                                                                                                                                     | Implemented                                                                                                                                                                              |            |                        |             |  |                                                                                                                                                                                                         |            |                        |             |
|                                  |                                  |                                                                                                                                                                                                                                                                                                |                              |                                                                                                                                                                                            |                                                                                                                                                                                          |            |                        |             |  | Vehicle washing facilities should be provided at every vehicle exit point. Every vehicle should be washed to remove any dusty materials from its body and wheels before leaving the construction sites. | Contractor | All relevant worksites | Implemented |
|                                  |                                  |                                                                                                                                                                                                                                                                                                |                              | The area where vehicle washing takes place and the section of the road between the washing facilities and the exit point should be paved with concrete, bituminous materials or hardcores. |                                                                                                                                                                                          |            |                        |             |  |                                                                                                                                                                                                         |            |                        |             |
|                                  |                                  | Every main haul road should be scaled with concrete and kept clear of dusty materials or sprayed with water so as to maintain the entire road surface wet.                                                                                                                                     | Contractor                   | All relevant worksites                                                                                                                                                                     | Implemented                                                                                                                                                                              |            |                        |             |  |                                                                                                                                                                                                         |            |                        |             |
|                                  |                                  | Every stock of more than 20 bags of cement or dry pulverised fuel ash (PFA) should be covered entirely by impervious sheeting or placed in an area sheltered on the top and the 3 sides.                                                                                                       | Contractor                   | All relevant<br>worksites                                                                                                                                                                  | Implemented                                                                                                                                                                              |            |                        |             |  |                                                                                                                                                                                                         |            |                        |             |

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong..



| EIA Ref                     | EM&A Ref                                  | Environmental Protection Measures / Mitigation Measures                                                                                                                                                                                                          | Who to implement the measure | Location /<br>Timing      | Construction<br>Phase<br>Implementation<br>Status |
|-----------------------------|-------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------|---------------------------------------------------|
|                             |                                           | Cement or dry PFA delivered in bulk should be stored in a closed silo fitted with an audible high level alarm which is interlocked with the material filling line and no overfilling is allowed.                                                                 | Contractor                   | All relevant worksites    | Implemented                                       |
|                             |                                           | Loading, unloading, transfer, handling or storage of bulk cement or dry PFA should be carried out in a totally enclosed system or facility, and any vent or exhaust should be fitted with an effective fabric filter or equivalent air pollution control system. | Contractor                   | All relevant<br>worksites | Implemented                                       |
|                             |                                           | Side enclosure and covering of any aggregate or dusty material storage piles to reduce emissions. Where this is not practicable owing to frequent usage, watering shall be applied to aggregate fines.                                                           | Contractor                   | All relevant<br>worksites | Partially<br>Implemented                          |
|                             |                                           | Open stockpiles shall be avoided or covered. Prevent placing dusty material storage piles near ASRs.                                                                                                                                                             | Contractor                   | All relevant worksites    | Partially<br>Implemented                          |
|                             |                                           | Routing of vehicles and position of construction plant should be at the maximum possible distance from ASRs.                                                                                                                                                     | Contractor                   | All relevant worksites    | Not Applicable                                    |
|                             |                                           | <u>Dark smoke</u>                                                                                                                                                                                                                                                |                              |                           |                                                   |
|                             |                                           | Dark smoke emission shall be control in accordance with the Air Pollution Control (Smoke) Regulation and ETWB TCW 19/2005.                                                                                                                                       | Contractor                   | All relevant worksites    | Partially<br>Implemented                          |
|                             |                                           | Plant and equipment should be well maintained to prevent dark smoke emission.                                                                                                                                                                                    | Contractor                   | All relevant worksites    | Partially<br>Implemented                          |
| Noise Measures              |                                           |                                                                                                                                                                                                                                                                  |                              |                           |                                                   |
| Trunk Road T2               |                                           |                                                                                                                                                                                                                                                                  |                              |                           |                                                   |
| AEIAR-174/2013<br>\$5.9.2.1 | AEIAR-174/2013<br>EM&A Manual<br>S3.4.1.1 | The use of quieter plant, including Quality Powered Mechanical Equipment (QPME) is specified for the list of equipment:  • Concrete lorry mixer  • Dump Truck, 5.5 tonne < gross vehicle weight <= 38 tonne  • Generator, Super Silenced, 70 dB(A) at 7m         | Contractor                   | All relevant<br>worksites | Implemented                                       |

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong..



| EIA Ref                                            | EM&A Ref                                                   | Environmental Protection Measures / Mitigation Measures                                                                                                                               | Who to implement the measure | Location /<br>Timing      | Construction<br>Phase<br>Implementation<br>Status |
|----------------------------------------------------|------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------|---------------------------------------------------|
|                                                    |                                                            | Poker, vibratory, Hand-held (electric)     Water Pump, Submersible (Electric)     Mobile Crane - KOBELCO CKS900     Excavator, wheeled/tracked - HYUNDAI R80CR-9                      |                              |                           |                                                   |
|                                                    |                                                            | Use of temporary or fixed noise barriers with a surface density of at least 10kg/m² to screen noise from movable and stationary plant.                                                | Contractor                   | All relevant<br>worksites | Implemented                                       |
|                                                    |                                                            | Use of enclosures with covers at top and three sides and a surface density of at least 10kg/m <sup>2</sup> to screen noise from generally static noisy plant such as air compressors. | Contractor                   | All relevant<br>worksites | Implemented                                       |
|                                                    |                                                            | Use of acoustic fabric for the silent piling system, drill rigs, rock drills etc.                                                                                                     | Contractor                   | All relevant<br>worksites | Implemented                                       |
|                                                    |                                                            | Good Site Practices                                                                                                                                                                   |                              |                           |                                                   |
| AEIAR-130/2009<br>S3.3, S5.3.10,<br>AEIAR-174/2013 | AEIAR 130/2009<br>EM&A Manual                              | Only well-maintained plant should be operated on-site and plant shall be serviced regularly during the construction/ decommissioning program.                                         | Contractor                   | All relevant<br>worksites | Implemented                                       |
| S5.9.2.1                                           | S2.3, S4.3.2,<br>AEIAR-174/2013<br>EM&A Manual<br>S3.4.1.1 | Silencers or mufflers on construction equipment should be utilized and shall be properly maintained during the construction/ decommissioning program.                                 | Contractor                   | All relevant worksites    | Implemented                                       |
|                                                    | 33.4.1.1                                                   | Mobile plant, if any, should be sited as far away from NSRs as possible.                                                                                                              | Contractor                   | All relevant worksites    | Implemented                                       |
|                                                    |                                                            | Machines and plant (such as trucks) that may be in intermittent use shall be shut down between works periods or should be throttled down to a minimum.                                | Contractor                   | All relevant worksites    | Implemented                                       |
|                                                    |                                                            | Plant known to emit noise strongly in one direction shall, wherever possible, be orientated so that the noise is directed away from the nearby NSRs.                                  | Contractor                   | All relevant<br>worksites | Implemented                                       |
|                                                    |                                                            | Material stockpiles and other structures should be effectively utilized, wherever practicable, in screening noise from on-site construction/ decommissioning activities.              | Contractor                   | All relevant worksites    | Implemented                                       |

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong..



| EIA Ref                    | EM&A Ref                                  | Environmental Protection Measures / Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                        | Who to implement the measure | Location /<br>Timing      | Construction<br>Phase<br>Implementation<br>Status |
|----------------------------|-------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------|---------------------------------------------------|
|                            |                                           | Use of site hoarding as a noise barrier to screen noise at low level NSRs.                                                                                                                                                                                                                                                                                                                                                     | Contractor                   | All relevant worksites    | Implemented                                       |
|                            |                                           | For the use of hand held percussive breakers (with mass of above 10kg) and portable air compressors (supply air at 500 kPa or above), the noise level of such PME shall comply with a stringent noise emission standard and a noise emission label shall be obtained from the DEP before use at any time in construction site.                                                                                                 | Contractor                   | All relevant<br>worksites | Implemented                                       |
|                            |                                           | Quiet powered mechanical equipment (PME) shall be used for the construction of the Project.                                                                                                                                                                                                                                                                                                                                    | Contractor                   | All relevant<br>worksites | Implemented                                       |
|                            |                                           | Full enclosures shall be used to screen noise from relatively static PMEs (including air compressor, bar bender, concrete pump, generator and water pump) from sensitive receiver(s).                                                                                                                                                                                                                                          | Contractor                   | All relevant worksites    | Implemented                                       |
|                            |                                           | Movable cantilevered noise barriers shall be used to screen noise from mobile PMEs (including asphalt paver, breaker, excavator and hand-held breaker) from sensitive receiver(s). These movable cantilevered noise barriers shall be located close to the mobile PMEs and shall be moved/adjusted iteratively in step with each movement of the corresponding mobile PMEs in order to maximize their noise reduction effects. | Contractor                   | All relevant<br>worksites | Implemented                                       |
|                            |                                           | Only approved or exempted Non-road Mobile Machineries (NRMMs) including regulated machines and non-road vechicles with proper labels are allowed to be used in specified activities on-site.                                                                                                                                                                                                                                   | Contractor                   | All relevant<br>worksites | Implemented                                       |
| Water Quality Mea          | sures                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                |                              |                           | •                                                 |
| Trunk Road T2              |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                |                              |                           |                                                   |
|                            |                                           | Accidental Spillage                                                                                                                                                                                                                                                                                                                                                                                                            |                              |                           |                                                   |
| AEIAR-174/2013<br>S6.4.8.5 | AEIAR-174/2013<br>EM&A Manual<br>S4.2.1.1 | All bentonite slurry should be stored in a container that resistant to corrosion, maintained in good conditions and securely closed; The container should be labelled in English and Chinese and note that the container is for storage of bentonite slurry only.                                                                                                                                                              | Contractor                   | All relevant<br>worksites | Implemented                                       |

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong..



| EIA Ref                    | EM&A Ref                                  | Environmental Protection Measures / Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Who to implement the measure | Location /<br>Timing      | Construction<br>Phase<br>Implementation<br>Status |
|----------------------------|-------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------|---------------------------------------------------|
|                            |                                           | The storage container should be placed on an area of impermeable flooring and bunded with capacity to accommodate 110% of the volume of the container size or 20% by volume stored in the area and enclosed with at least 3 sides.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Contractor                   | All relevant worksites    | Implemented                                       |
|                            |                                           | The storage container should be sufficiently covered to prevent rainfall entering the container or bunded area (water collected within the bund must be tested and disposed of as chemical waste, if necessary). An emergency clean up kit shall be readily available where bentonite fluid will be stored or used.                                                                                                                                                                                                                                                                                                                                                                                                            | Contractor                   | All relevant<br>worksites | Implemented                                       |
|                            |                                           | The handling and disposal of bentonite slurries should be undertaken in accordance within ProPECC PN 1/94. Surplus bentonite slurries used in construction works shall be reconditioned and reused wherever practicable. Residual bentonite slurry shall be disposed of from the site as soon as possible as stipulated in Clause 8.56 of the General Specification for Civil Engineering Works. The Contractor should explore alternative disposal outlets for the residual bentonite slurry (dewatered bentonite slurry to be disposed to a public filling area and liquid bentonite slurry, if mixed with inert fill material, to be disposed to a public filling area) and disposal at landfill should be the last resort. | Contractor                   | All relevant<br>worksites | Implemented                                       |
| AEIAR-174/2013<br>S6.4.8.8 | AEIAR-174/2013<br>EM&A Manual<br>S4.2.1.1 | In order to protect against impacts to the surrounding marine waters of the KTTS and Victoria Harbour in the event of an accidental spillage of fuel or oil, the Contractor will be required to prepare a spill response plan to the satisfaction of AFCD, EPD, FSD, Police, TD and WSD to define procedures for the control, containment and clean-up of any spillage that could occur on the construction site.                                                                                                                                                                                                                                                                                                              | Contractor                   | All relevant<br>worksites | Implemented                                       |
|                            |                                           | Dredging, Reclamation and Filling                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                              |                           |                                                   |
|                            |                                           | No dredging, reclamation or filling in the marine environment shall be carried out.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Contractor                   | All relevant worksites    | Implemented                                       |
| Decommissioning            | of the Radar Station                      | n of the former Kai Tak Airport                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                              |                           |                                                   |
|                            |                                           | Building Demolition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                              |                           |                                                   |

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

1-15 Kwai Fung Crescent, Kwai Fong, Fax : (
Hong Kong.. Email : 1



| EIA Ref                                                          | EM&A Ref                                                                                | Environmental Protection Measures / Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Who to implement the measure | Location /<br>Timing      | Construction<br>Phase<br>Implementation<br>Status |
|------------------------------------------------------------------|-----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------|---------------------------------------------------|
| AEIAR-130/2009<br>S5.4                                           | AEIAR 130/2009<br>EM&A Manual<br>S4.4                                                   | The site practices outlined in ProPECC PN 1/94 "Construction Site Drainage" should be followed as far as practicable in order to minimise surface runoff and the chance of erosion.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Contractor                   | All relevant worksites    | Implemented                                       |
|                                                                  | 54.4                                                                                    | There is a need to apply to EPD for a discharge licence under the WPCO for discharging effluent from the construction site. The discharge quality is required to meet the requirements specified in the discharge licence. All the runoff, wastewater or extracted groundwater generated from the works areas should be treated so that it satisfies all the standards listed in the TM-DSS. It is anticipated that the wastewater generated from the works areas would be of small quantity. Monitoring of the treated effluent quality from the works areas should be carried out in accordance with the WPCO license which is under the ambit of regional office (RO) of EPD. | Contractor                   | All relevant<br>worksites | Implemented                                       |
|                                                                  |                                                                                         | General Construction Works                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                              |                           |                                                   |
|                                                                  |                                                                                         | Construction Runoff                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                              |                           |                                                   |
| AEIAR-<br>130/2009 S3.4,<br>S5.4/ AEIAR-<br>174/2013<br>S6.4.8.1 | AEIAR 130/2009<br>EM&A Manual<br>S2.4, S4.4/ AEIAR-<br>174/2013 EM&A<br>Manual S4.2.1.1 | Exposed soil areas should be minimised to reduce the potential for increased siltation, contamination of runoff, and erosion. Construction runoff related impacts associated with the above ground construction activities can be readily controlled through the use of appropriate mitigation measures which include the use of sediment traps and adequate maintenance of drainage systems to prevent flooding and overflow.                                                                                                                                                                                                                                                   | Contractor                   | All relevant<br>worksites | Implemented                                       |
|                                                                  |                                                                                         | Construction site should be provided with adequately designed perimeter channel and pretreatment facilities and proper maintenance. The boundaries of critical areas of earthworks should be marked and surrounded by dykes or embankments for flood protection. Temporary ditches should be provided to facilitate runoff discharge into the appropriate watercourses, via a silt retention pond. Permanent drainage channels should incorporate sediment basins or traps and baffles to enhance deposition rates. The design of efficient silt removal facilities should be based on the guidelines in Appendix A1 of ProPECC PN 1/94.                                         | Contractor                   | All relevant<br>worksites | Implemented                                       |
|                                                                  |                                                                                         | Ideally, construction works should be programmed to minimise surface excavation works during the rainy season (April to September). All exposed earth areas should be completed as soon as possible after earthworks have been completed, or alternatively, within 14 days of the cessation of earthworks where practicable. If excavation of soil cannot be avoided during the                                                                                                                                                                                                                                                                                                  | Contractor                   | All relevant<br>worksites | Implemented                                       |

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong..



| EIA Ref | EM&A Ref | Environmental Protection Measures / Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                      | Who to implement the measure | Location /<br>Timing      | Construction<br>Phase<br>Implementation<br>Status |
|---------|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------|---------------------------------------------------|
|         |          | rainy season, or at any time of year when rainstorms are likely, exposed slope surfaces should be covered by tarpaulin or other means.                                                                                                                                                                                                                                                                                                                                                       |                              |                           |                                                   |
|         |          | Sediment tanks of sufficient capacity, constructed from pre-formed individual cells of approximately 6 to 8 m3 capacity, are recommended as a general mitigation measure which can be used for settling surface runoff prior to disposal. The system capacity is flexible and able to handle multiple inputs from a variety of sources and particularly suited to applications where the influent is pumped.                                                                                 | Contractor                   | All relevant<br>worksites | Implemented                                       |
|         |          | Open stockpiles of construction materials (for examples, aggregates, sand and fill material) of more than 50 m³ should be covered with tarpaulin or similar fabric during rainstorms. Measures should be taken to prevent the washing away of construction materials, soil, silt or debris into any drainage system.                                                                                                                                                                         | Contractor                   | All relevant<br>worksites | Partially<br>Implemented                          |
|         |          | Manholes (including newly constructed ones) should always be adequately covered and temporarily sealed so as to prevent silt, construction materials or debris being washed into the drainage system and storm runoff being directed into foul sewers.                                                                                                                                                                                                                                       | Contractor                   | All relevant worksites    | Implemented                                       |
|         |          | Precautions to be taken at any time of year when rainstorms are likely, actions to be taken when a rainstorm is imminent or forecast, and actions to be taken during or after rainstorms are summarised in Appendix A2 of ProPECC PN 1/94. Particular attention should be paid to the control of silty surface runoff during storm events.                                                                                                                                                   | Contractor                   | All relevant<br>worksites | Implemented                                       |
|         |          | Oil interceptors should be provided in the drainage system and regularly cleaned to prevent the release of oils and grease into the storm water drainage system after accidental spillages. The interceptor should have a bypass to prevent flushing during periods of heavy rain.                                                                                                                                                                                                           | Contractor                   | All relevant worksites    | Not Applicable                                    |
|         |          | An adequately designed and located wheel washing bay should be provided at every site exit, and wash-water should have sand and silt settled out and removed at least on a weekly basis to ensure the continued efficiency of the process. The section of access road leading to, and exiting from, the wheel-wash bay to the public road should be paved with sufficient backfall toward the wheel-wash bay to prevent vehicle tracking of soil and silty water to public roads and drains. | Contractor                   | All relevant<br>worksites | Implemented                                       |

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong..



| EIA Ref | EM&A Ref | Environmental Protection Measures / Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Who to implement the measure | Location /<br>Timing      | Construction<br>Phase<br>Implementation<br>Status |
|---------|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------|---------------------------------------------------|
|         |          | <u>Drainage</u>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                              |                           |                                                   |
|         |          | It is recommended that on-site drainage system should be installed prior to the commencement of other construction activities. Sediment traps should be installed in order to minimise the sediment loading of the effluent prior to discharge into foul sewers. There should be no direct discharge of effluent from the site into the sea.                                                                                                                                                                                          | Contractor                   | All relevant<br>worksites | Implemented                                       |
|         |          | All temporary and permanent drainage pipes and culverts provided to facilitate runoff discharge should be adequately designed for the controlled release of storm flows. All sediment control measures should be regularly inspected and maintained to ensure proper and efficient operation at all times and particularly following rain storms. The temporarily diverted drainage should be reinstated to its original condition when the construction work has finished or the temporary diversion is no longer required.          | Contractor                   | All relevant<br>worksites | Implemented                                       |
|         |          | Stormwater Discharges                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                              |                           |                                                   |
|         |          | Minimum distances of 100 m should be maintained between the existing or planned stormwater discharges and the existing or planned seawater intakes.                                                                                                                                                                                                                                                                                                                                                                                   | Contractor                   | All relevant worksites    | Not Applicable                                    |
|         |          | Sewage Effluent                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                              |                           |                                                   |
|         |          | Construction work force sewage discharges on site are expected to be connected to the existing trunk sewer or sewage treatment facilities. The construction sewage may need to be handled by portable chemical toilets prior to the commission of the on-site sewer system. Appropriate numbers of portable toilets should be provided by a licensed contractor to serve the large number of construction workers over the construction site. The Contractor should also be responsible for waste disposal and maintenance practices. | Contractor                   | All relevant<br>worksites | Implemented                                       |
|         |          | Debris and Litter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                              |                           |                                                   |
|         |          | In order to maintain water quality in acceptable conditions with regard to aesthetic quality, contractors should be required, under conditions of contract, to ensure that site management is optimised and that disposal of any solid materials, litter or wastes to marine waters does not occur. Debris and refuse generated on-site should be collected, handled and disposed of                                                                                                                                                  | Contractor                   | All relevant<br>worksites | Implemented                                       |

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong..



| EIA Ref                      | EM&A Ref                                    | Environmental Protection Measures / Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Who to implement the measure | Location /<br>Timing      | Construction<br>Phase<br>Implementation<br>Status |
|------------------------------|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------|---------------------------------------------------|
|                              |                                             | properly to avoid entering into the adjacent harbour waters. Stockpiles of cement and other construction materials should be kept covered when not being used.                                                                                                                                                                                                                                                                                                                                                                  |                              |                           |                                                   |
|                              |                                             | Accidental Spillage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                              |                           |                                                   |
|                              |                                             | Oils and fuels should only be used and stored in designated areas which have pollution prevention facilities. To prevent spillage of fuels and solvents to the nearby harbour waters, all fuel tanks and storage areas should be provided with locks and be sited on sealed areas, within bunds of a capacity equal to 110% of the storage capacity of the largest tank, to prevent spilled fuel oils from reaching the coastal waters of the Victoria Harbour WCZ. The bund should be drained of rainwater after a rain event. | Contractor                   | All relevant<br>worksites | Implemented                                       |
|                              |                                             | Waste Management Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                              |                           |                                                   |
|                              |                                             | Waste Management Plan                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                              |                           |                                                   |
| AEIAR-174/2013<br>S11.4.8.1  | AEIAR-174/2013<br>EM&A Manual<br>S9.2.1.2   | Contractor should be requested to submit an outline Waste Management Plan (WMP) prior to the commencement of construction work, in accordance with the ETWB TC(W) No.19/2005 so as to provide an overall framework of waste management and reduction.                                                                                                                                                                                                                                                                           | Contractor                   | All relevant<br>worksites | Implemented                                       |
|                              |                                             | Good Site Practices                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                              |                           |                                                   |
| AEIAR-130/2009<br>S3.5, S5.5 | AEIAR 130/2009<br>EM&A Manual<br>S2.5, S4.5 | Nomination of an approved person, such as a site manager, to be responsible for good site practices, arrangements for collection and effective disposal to an appropriate facility, of all wastes generated at the site.                                                                                                                                                                                                                                                                                                        | Contractor                   | All relevant<br>worksites | Implemented                                       |
|                              |                                             | Training of site personnel in proper waste management and chemical waste handling procedures.                                                                                                                                                                                                                                                                                                                                                                                                                                   | Contractor                   | All relevant worksites    | Implemented                                       |
|                              |                                             | Provision of sufficient waste disposal points and regular collection for disposal.                                                                                                                                                                                                                                                                                                                                                                                                                                              | Contractor                   | All relevant<br>worksites | Implemented                                       |
|                              |                                             | Appropriate measures to minimize windblown litter and dust during transportation of waste by either covering trucks or by transporting wastes in enclosed containers.                                                                                                                                                                                                                                                                                                                                                           | Contractor                   | All relevant worksites    | Implemented                                       |

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong..



| EIA Ref | EM&A Ref | Environmental Protection Measures / Mitigation Measures                                                                                                                                                                       | Who to implement the measure | Location /<br>Timing      | Construction<br>Phase<br>Implementation<br>Status |
|---------|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------|---------------------------------------------------|
|         |          | A recording system for the amount of wastes generated, recycled and disposed of (including the disposal sites).                                                                                                               | Contractor                   | All relevant worksites    | Implemented                                       |
|         |          | Waste Reduction Measures                                                                                                                                                                                                      |                              |                           |                                                   |
|         |          | Sort C&D waste from demolition of the remaining structures to recover recyclable portions such as metals.                                                                                                                     | Contractor                   | All relevant<br>worksites | Not Applicable                                    |
|         |          | Segregation and storage of different types of waste in different containers, skips or stockpiles to enhance reuse or recycling of materials and their proper disposal.                                                        | Contractor                   | All relevant worksites    | Implemented                                       |
|         |          | Encourage collection of aluminum cans, PET bottles and paper by providing separate labelled bins to enable these wastes to be segregated from other general refuse generated by the work force.                               | Contractor                   | All relevant<br>worksites | Implemented                                       |
|         |          | Any unused chemicals or those with remaining functional capacity should be recycled.                                                                                                                                          | Contractor                   | All relevant worksites    | Implemented                                       |
|         |          | Proper storage and site practices to minimize the potential for damage or contamination of construction materials.                                                                                                            | Contractor                   | All relevant worksites    | Implemented                                       |
|         |          | Construction and Demolition Materials                                                                                                                                                                                         |                              |                           |                                                   |
|         |          | Where it is unavoidable to have transient stockpiles of C&D material within the work site pending collection for disposal, the transient stockpiles shall be located away from waterfront or storm drains as far as possible. | Contractor                   | All relevant<br>worksites | Implemented                                       |
|         |          | Open stockpiles of construction materials or construction wastes on-site should be covered with tarpaulin or similar fabric.                                                                                                  | Contractor                   | All relevant worksites    | Partially<br>Implemented                          |
|         |          | Skip hoist for material transport should be totally enclosed by impervious sheeting.                                                                                                                                          | Contractor                   | All relevant<br>worksites | Implemented                                       |

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

1-15 Kwai Fung Crescent, Kwai Fong, Fax Hong Kong.. Email



| EIA Ref | EM&A Ref | Environmental Protection Measures / Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Who to implement the measure | Location /<br>Timing      | Construction<br>Phase<br>Implementation<br>Status |
|---------|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------|---------------------------------------------------|
|         |          | Every vehicle should be washed to remove any dusty materials from its body and wheels before leaving a construction site.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Contractor                   | All relevant<br>worksites | Implemented                                       |
|         |          | The area where vehicle washing takes place and the section of the road between the washing facilities and the exit point should be paved with concrete, bituminous materials or hardcores.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Contractor                   | All relevant worksites    | Implemented                                       |
|         |          | The load of dusty materials carried by vehicle leaving a construction site should be covered entirely by clean impervious sheeting to ensure dust materials do not leak from the vehicle.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Contractor                   | All relevant worksites    | Implemented                                       |
|         |          | All dusty materials should be sprayed with water prior to any loading, unloading or transfer operation so as to maintain the dusty materials wet.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Contractor                   | All relevant worksites    | Implemented                                       |
|         |          | The height from which excavated materials are dropped should be controlled to a minimum practical height to limit fugitive dust generation from unloading.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Contractor                   | All relevant worksites    | Implemented                                       |
|         |          | When delivering inert C&D material to public fill reception facilities, the material should consist entirely of inert construction waste and of size less than 250mm or other sizes as agreed with the Secretary of the Public Fill Committee. In order to monitor the disposal of the surplus C&D material at the designed public fill reception facility and to control fly tipping, a trip-ticket system as stipulated in the ETWB TCW No. 31/2004 "Trip Ticket System for Disposal of Construction and Demolition Materials" should be included as one of the contractual requirements and implemented by an Environmental Team undertaking the Environmental Monitoring and Audit work. An Independent Environmental Checker should be responsible for auditing the results of the system. | Contractor                   | All relevant<br>worksites | Implemented                                       |
|         |          | Chemical Waste                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                              |                           |                                                   |
|         |          | After use, chemical wastes (for example, cleaning fluids, solvents, lubrication oil and fuel) should be handled according to the Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes. Spent chemicals should be collected by a licensed collector for disposal at the CWTF or other licensed facility, in accordance with the Waste Disposal (Chemical Waste) (General) Regulation.                                                                                                                                                                                                                                                                                                                                                                                     | Contractor                   | All relevant<br>worksites | Partially<br>Implemented                          |

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong..



| EIA Ref                   | EM&A Ref                              | Environmental Protection Measures / Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Who to implement the measure | Location /<br>Timing      | Construction<br>Phase<br>Implementation<br>Status |
|---------------------------|---------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------|---------------------------------------------------|
|                           |                                       | General Refuse                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                              |                           |                                                   |
|                           |                                       | General refuse should be stored in enclosed bins or compaction units separate from C&D material. A licensed waste collector should be employed by the contractor to remove general refuse from the site, separately from C&D material. Effective collection and storage methods (including enclosed and covered area) of site wastes would be required to prevent waste materials from being blown around by wind, wastewater discharge by flushing or leaching into the marine environment, or creating odour nuisance or pest and vermin problem. | Contractor                   | All relevant<br>worksites | Partially<br>Implemented                          |
| Land Contamination        | on Measures                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                              |                           | •                                                 |
|                           |                                       | For any excavation works conducted at Radar Station                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                              |                           |                                                   |
| AEIAR-130/2009<br>S3.6.57 | AEIAR 130/2009<br>EM&A Manual<br>S4.6 | As the risk due to dermal contact with groundwater by site workers is uncertain, it is recommended that personnel protective equipment (PPE) be used by site workers as a mitigation measure.                                                                                                                                                                                                                                                                                                                                                       | Contractor                   | All relevant worksites    | Not Applicable                                    |
| Landscape and Vi          | sual Impact                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 1                            |                           | 1                                                 |
| New Distributor Ro        | oads Serving the Pla                  | anned KTD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                              |                           |                                                   |
|                           |                                       | Construction Phase                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                              |                           |                                                   |
| AEIAR-130/2009<br>S3.8.12 | AEIAR 130/2009<br>EM&A Manual<br>S2.8 | All existing trees should be carefully protected during construction.                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Contractor                   | All relevant worksites    | Not Applicable                                    |
|                           | 32.0                                  | Trees unavoidably affected by the works should be transplanted where practical. Detailed transplanting proposal will be submitted to relevant government departments for approval in accordance with ETWBC 2/2004 and 3/2006. Final locations of transplanted trees should be agreed prior to commencement of the work.                                                                                                                                                                                                                             | Contractor                   | All relevant<br>worksites | Not Applicable                                    |
|                           |                                       | Control of night-time lighting.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Contractor                   | All relevant<br>worksites | Not Applicable                                    |

Room 723 & 725, 7/F, Block B, Profit Industrial Building,

1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong..



| EIA Ref                    | EM&A Ref                                  | Environmental Protection Measures / Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                         | Who to implement the measure | Location /<br>Timing      | Construction<br>Phase<br>Implementation<br>Status |
|----------------------------|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------|---------------------------------------------------|
|                            |                                           | Erection of decorative screen hoarding.                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Contractor                   | All relevant worksites    | Implemented                                       |
| Trunk Road T2              |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                              |                           |                                                   |
|                            |                                           | Construction Phase                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                              |                           |                                                   |
| AEIAR-174/2013<br>S9.9.1.1 | AEIAR-174/2013<br>EM&A Manual<br>S7.2.1.2 | All works shall be carefully designed to minimize impacts on existing landscape resources and visually sensitive receivers. Existing trees within works area shall be retained and protected.                                                                                                                                                                                                                                                                                                   | Contractor                   | All relevant worksites    | Not Applicable  Not Applicable                    |
|                            |                                           | Existing trees of good quality and condition that are unavoidably affected by the works should be transplanted.                                                                                                                                                                                                                                                                                                                                                                                 | Contractor                   | All relevant worksites    | Not Applicable                                    |
|                            |                                           | Large temporary stockpiles of excavated material shall be covered with unobtrusive sheeting to prevent dust and dirt spreading to adjacent landscape areas and vegetation, and to create a neat and tidy visual appearance.                                                                                                                                                                                                                                                                     | Contractor                   | All relevant worksites    | Partially<br>Implemented                          |
|                            |                                           | Construction plant and building material shall be orderly and carefully stored in order to create a neat and tidy visual appearance.                                                                                                                                                                                                                                                                                                                                                            | Contractor                   | All relevant worksites    | Implemented                                       |
|                            |                                           | Erection of decorative screen hoarding should be designed to be compatible with the existing urban context.                                                                                                                                                                                                                                                                                                                                                                                     | Contractor                   | All relevant worksites    | Implemented                                       |
|                            |                                           | All lighting in construction site shall be carefully controlled to minimize light pollution and night-time glare to nearby residences and GIC user. The contractor shall consider other security measures, which shall minimize the visual impacts.                                                                                                                                                                                                                                             | Contractor                   | All relevant worksites    | Not Applicable                                    |
| General Condition          |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | - '                          |                           | •                                                 |
|                            |                                           | The Permit Holder shall display conspicuously a copy of this Permit on the Project site(s) at all vehicular site entrances/exits or at a convenient location for public's information at all times. The Permit Holder shall ensure that the most updated information about the Permit, including any amended Permit, is displayed at such locations. If the Permit Holder surrenders a part or the whole of the Permit, the notice he sends to the Director shall also be displayed at the same | Contractor                   | All relevant<br>worksites | Implemented                                       |

Room 723 & 725, 7/F, Block B,

Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong.. Tel : (852)-24508238 Fax : (852)-24508032 Email : mcl@fugro.com.hk



| EIA Ref | EM&A Ref | Environmental Protection Measures / Mitigation Measures                                                                           | Who to implement the measure | Location /<br>Timing | Construction<br>Phase<br>Implementation<br>Status |
|---------|----------|-----------------------------------------------------------------------------------------------------------------------------------|------------------------------|----------------------|---------------------------------------------------|
|         |          | locations as the original Permit. The suspended, varied or cancelled Permit shall be removed from display at the Project site(s). |                              |                      |                                                   |

Implementation status: Implemented / Partially Implemented / Not Implemented / Not Applicable

Room 723 & 725, 7/F, Block B,

Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong.. : (852)-24508238 : (852)-24508032 Tel Fax Email : mcl@fugro.com.hk



# Appendix K

Weather and Meteorological Conditions during Reporting Month

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong.. : (852)-24508238 : (852)-24508032 : mcl@fugro.com.hk Tel Fax Email



|      | Mean              |                     | Air Temperature  | e                   | Mean<br>Relative | Total            |
|------|-------------------|---------------------|------------------|---------------------|------------------|------------------|
| Date | Pressure<br>(hPa) | Maximum<br>(deg. C) | Mean<br>(deg. C) | Minimum<br>(deg. C) | Humidity<br>(%)  | Rainfall<br>(mm) |
|      | -                 | _                   | January 2017     | -                   | -                | -                |
| 01   | 1021.7            | 20.8                | 19.2             | 18.4                | 80               | 0.0              |
| 02   | 1020.2            | 23.3                | 20.2             | 18.4                | 81               | 0.0              |
| 03   | 1019.8            | 21.3                | 20.0             | 18.9                | 83               | 0.0              |
| 04   | 1018.7            | 21.7                | 19.9             | 18.7                | 80               | 0.0              |
| 05   | 1016.9            | 23.4                | 21.1             | 18.9                | 80               | 0.0              |
| 06   | 1015.1            | 25.0                | 21.6             | 19.7                | 80               | 0.0              |
| 07   | 1013.9            | 22.8                | 21.1             | 19.7                | 79               | 0.0              |
| 08   | 1013.4            | 25.5                | 22.6             | 20.5                | 76               | 0.0              |
| 09   | 1016.3            | 21.8                | 20.6             | 19.7                | 78               | 0.0              |
| 10   | 1018.1            | 20.5                | 19.4             | 18.8                | 79               | 0.0              |
| 11   | 1018.1            | 19.7                | 19.1             | 18.2                | 80               | 0.0              |
| 12   | 1015.5            | 20.3                | 19.0             | 16.9                | 81               | Trace            |
| 13   | 1015.7            | 17.1                | 15.9             | 15.1                | 84               | 0.5              |
| 14   | 1017.9            | 16.5                | 15.7             | 14.5                | 87               | 1.0              |
| 15   | 1020.5            | 16.8                | 15.5             | 14.3                | 85               | 1.5              |
| 16   | 1020.4            | 17.4                | 16.3             | 14.7                | 80               | 0.4              |
| 17   | 1021.1            | 19.2                | 18.0             | 16.7                | 76               | 0.0              |
| 18   | 1021.2            | 20.0                | 18.9             | 18.0                | 86               | Trace            |
| 19   | 1020.1            | 24.1                | 20.4             | 18.7                | 85               | 0.0              |
| 20   | 1022.4            | 20.6                | 18.3             | 16.2                | 69               | Trace            |
| 21   | 1025.3            | 19.0                | 16.7             | 14.6                | 67               | 0.0              |
| 22   | 1026.1            | 19.8                | 16.4             | 13.6                | 58               | 0.0              |
| 23   | 1025.7            | 19.4                | 16.8             | 15.2                | 71               | 0.0              |
| 24   | 1025.4            | 18.9                | 17.0             | 15.7                | 72               | 0.0              |
| 25   | 1025.5            | 20.9                | 17.5             | 15.9                | 76               | 0.0              |
| 26   | 1024.3            | 19.8                | 17.3             | 16.2                | 75               | 0.0              |
| 27   | 1022.6            | 21.3                | 17.5             | 14.4                | 69               | 0.0              |
| 28   | 1018.6            | 18.8                | 17.3             | 16.4                | 79               | 0.3              |
| 29   | 1016.6            | 21.5                | 19.1             | 18.1                | 88               | 2.4              |
| 30   | 1018.2            | 23.4                | 20.2             | 17.4                | 90               | 1.2              |
| 31   | 1020.2            | 17.6                | 16.7             | 15.9                | 87               | 0.5              |

Source: Hong Kong Observatory – Hong Kong Observatory

Room 723 & 725, 7/F, Block B,

Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, : (852)-24508238 : (852)-24508032 Fax Hong Kong.. Email : mcl@fugro.com.hk



# Appendix L

Cumulative statistics on Environmental Complaints, Notifications of Summons and **Successful Prosecution** 

Room 723 & 725, 7/F, Block B,

Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, : (852)-24508238 : (852)-24508032 Tel Fax Hong Kong.. Email: mcl@fugro.com.hk



**Environmental Complaints Log** 

| Complaint<br>Log No. | Date of<br>Notification | Received<br>From and<br>Received<br>By | Nature of<br>Complaint | Date of Investigation | Outcome             | Date of Reply       |
|----------------------|-------------------------|----------------------------------------|------------------------|-----------------------|---------------------|---------------------|
| 1                    | 15 December<br>2016     | Andy Choy                              | Air                    | 13 February<br>2017   | Project-<br>related | 13 February<br>2017 |

**Cumulative Statistics on Complaints** 

| Environmental<br>Parameters | Cumulative No.<br>Brought Forward | No. of Complaints<br>This Month | Cumulative Project-<br>to-Date |
|-----------------------------|-----------------------------------|---------------------------------|--------------------------------|
| Air                         | 0                                 | 1                               | 1                              |
| Noise                       | 0                                 | 0                               | 0                              |
| Water                       | 0                                 | 0                               | 0                              |
| Waste                       | 0                                 | 0                               | 0                              |
| Total                       | 0                                 | 0                               | 0                              |

#### Cumulative Statistics on Notification of Summons and Successful Prosecutions

| Environmental<br>Parameters | Cumulative No.<br>Brought Forward | No. of Notification of<br>Summons and<br>Prosecutions This<br>Month | Cumulative Project-<br>to-Date |
|-----------------------------|-----------------------------------|---------------------------------------------------------------------|--------------------------------|
| Air                         | 0                                 | 0                                                                   | 0                              |
| Noise                       | 0                                 | 0                                                                   | 0                              |
| Water                       | 0                                 | 0                                                                   | 0                              |
| Waste                       | 0                                 | 0                                                                   | 0                              |
| Total                       | 0                                 | 0                                                                   | 0                              |

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong.

Tel : (852)-24508238 Fax : (852)-24508032 Email : mcl@fugro.com.hk



# Investigation Report for the Complaint Received on 7<sup>th</sup> December 2016

| Reference No.:         | 20161207_complaint_c                                                                                                                                                                                                                                                                                                                                           |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Project:               | Contract KL/2014/03 – Kai Tak Development – Stage 3 Infrastructure Works for Developments at the Southern Part of the Former Runway                                                                                                                                                                                                                            |
| Date of Complaint:     | 7 <sup>th</sup> December 2016                                                                                                                                                                                                                                                                                                                                  |
| Background:            | A compliant received on 7 <sup>th</sup> December 2016 was referred from EPD on 15 <sup>th</sup> December 2016 regarding the sand and mud dropped from the vehicle that caused Cheung Yip Street and Shing Cheong dusty. The notification of complaint was received by ET on 27 <sup>th</sup> January 2017.                                                     |
| Investigation Results: | On 7 <sup>th</sup> December 2016 (the date of the complaint), some wet soil and mud resulted from diaphragm wall construction were removed from the site of KL/2014/03 to disposal grounds.                                                                                                                                                                    |
|                        | All site vehicles, including dump trucks were thoroughly washed at site entrances before leaving the site to ensure no silt and mud stuck on wheels and vehicle body be delivered to the public road in their journey to the destination.                                                                                                                      |
|                        | All dump trucks were covered with mechanical cover to ensure no mud and soil be dropped from the skip to the public road in their journey to the destination.                                                                                                                                                                                                  |
|                        | <ul> <li>Cleaning of Shing Cheong Road and Cheung Yip Street were carried out by general<br/>workers of China Road and Bridge Corporation (CRBC) on 7<sup>th</sup> December 2016.</li> </ul>                                                                                                                                                                   |
|                        | A thorough cleaning of Shing Cheong Road and Cheung Yip Street by street sweep vehicles was carried out by the Contractor in the afternoon of 7 <sup>th</sup> December 2016.                                                                                                                                                                                   |
|                        | Further thorough cleanings of Shing Cheong Road and Cheung Yip Street were also carried out on 7 <sup>th</sup> and 20 <sup>th</sup> January 2017.                                                                                                                                                                                                              |
|                        | The contractor of Hong Kong Children's Hospital (HKCH) shares the use of Cheung Yip Street with CRBC as the site access, which will have contribution to the complaint.                                                                                                                                                                                        |
| Conclusion             | The complaint received on 7 <sup>th</sup> December 2016 is project related.                                                                                                                                                                                                                                                                                    |
| Advice from ET:        | Each main haul road should be scaled with concrete and kept clear of dusty materials or sprayed with water so as to maintain the entire road surface wet.                                                                                                                                                                                                      |
|                        | Every vehicle should be washed at the site exit to remove any dusty materials from its body and wheels before leaving the construction site. Water used for vehicle cleaning should be collected for sedimentation before re-use or disposal at a designated discharge location. No runoff or surface water is allowed to be drained out of the site boundary. |
|                        | The load of dusty materials carried by vehicle leaving the construction site should be covered entirely by clean impervious sheeting to ensure dust materials do not leak from the vehicle.                                                                                                                                                                    |
|                        | Dusty materials should not be loaded up to a height over the edges of the sides and tailboards of the vehicle.                                                                                                                                                                                                                                                 |
|                        | All dusty materials should be sprayed with water prior to any loading, unloading or transfer operation so as to maintain the dusty materials wet.                                                                                                                                                                                                              |
|                        | The Contractor is reminded that street cleaning or washing to remove sand and silt deposited on the road surface near the construction site would generate muddy water that should be not drained into the stormwater sewers. Manual collection and cleaning of sand and silt are preferred.                                                                   |

Prepared by: Alfred Lam Certified by: Colin Yung

Designation: Environmental Team Leader

Signature:

Date: 16/02/2017

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong,

: (852)-24508238 : (852)-24508032 : mcl@fugro.com.hk Tel Fax Hong Kong.



## **Site Photo Record:**

Watering and sweeping was provided for diversion road and Cheung Yip Street on 7 December 2016.













Room 723 & 725, 7/F, Block B,

Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, : (852)-24508238 : (852)-24508032 : mcl@fugro.com.hk Tel Fax Hong Kong.



Watering and sweeping was provided for diversion road and Cheung Yip Street on 7 December 2016.





Room 723 & 725, 7/F, Block B,

Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong. : (852)-24508238 : (852)-24508032 : mcl@fugro.com.hk Tel Fax



# Wheel washing at the site entrance was provided on 7 December 2016.









Stockpile of dusty materials were covered properly on 7 December 2016.





Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong. : (852)-24508238 : (852)-24508032 : mcl@fugro.com.hk Tel Fax



Wheel washing at the site entrance was provided on 7 December 2016.







Room 723 & 725, 7/F, Block B,

Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, : (852)-24508238 : (852)-24508032 : mcl@fugro.com.hk Tel Fax Hong Kong.





Room 723 & 725, 7/F, Block B,

Profit Industrial Building, Tel : (852)-24508238
1-15 Kwai Fung Crescent, Kwai Fong, Fax : (852)-24508032
Hong Kong.. Email : mcl@fugro.com.hk



# Appendix M

Summary of Site Audit in the Reporting Month

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong..

Tel : (852)-24508238 Fax : (852)-24508032 Email : mcl@fugro.com.hk



**Summary of Site Audit in the Reporting Month** 

| •                                   | ite Audit in the Repo | Observations and                                                                                                                                                       |                                                                            |
|-------------------------------------|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|
| Parameters                          | Date                  | Recommendations                                                                                                                                                        | Follow-up                                                                  |
|                                     | 5 January 2017        | Contractor was reminded to provide adequate watering to reduce dust emission. Adequate watering shall be provided. (Portion I).                                        | The item was rectified by the Contractor and inspected on 12 January 2017. |
|                                     | 5 January 2017        | The C&D material shall be properly covered after the excavation is done (Zone1).                                                                                       | The item was rectified by the Contractor and inspected on 12 January 2017. |
|                                     | 12 January 2017       | Dusty road shall be sprayed with water regularly to reduce dust emission. (Zone 4)                                                                                     | The item was rectified by the Contractor and inspected on 18 January 2017. |
| Air Quality                         | 18 January 2017       | Open stockpile shall be covered with impermeable sheeting to prevent dust emission. (Zone 4)                                                                           | The item was rectified by the Contractor and inspected on 26 January 2017. |
|                                     | 26 January 2017       | Dark smoke was observed in<br>an operating crane. Purifier<br>shall be installed and<br>repairing programme shall be<br>implemented (Zone 2).                          | The item was rectified by the Contractor and inspected on 2 February 2017. |
|                                     | 26 January 2017       | Contractor was reminded to keep watering to reduce dust emission form construction activities (Zone 4).                                                                | The item was rectified by the Contractor and inspected on 2 February 2017. |
| Noise                               |                       | NA                                                                                                                                                                     |                                                                            |
| Water Quality                       | 5 January 2017        | Contractor shall provide a good practise to prevent waste water from wheel washing to enter the public drainage. Proper wheel washing area shall be provided. (Zone 2) | The item was rectified by the Contractor and inspected on 12 January 2017. |
|                                     | 26 January 2017       | Waste water from wheel washing shall be from the pit at Zone 2. Waste water shall be removed. (Zone 2).                                                                | The item was rectified by the Contractor and inspected on 2 February 2017. |
| Chemical and<br>Waste<br>Management | 12 January 2017       | Oil Containers shall be stored properly. Drip tray shall be provided. Empty oil containers shall be removed. (Zone 1 and Zone 4)                                       | The item was rectified by the Contractor and inspected on 18 January 2017. |
| Land<br>Contamination               |                       | NA                                                                                                                                                                     |                                                                            |

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong.. Tel Fax Email : (852)-24508238 : (852)-24508032 : mcl@fugro.com.hk



| Parameters              | Date            | Observations and<br>Recommendations                                                                                                                                                                  | Follow-up                                                                  |
|-------------------------|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|
| Landscape<br>and Visual | 5 January 2017  | Open stockpiles shall be covered by unobtrusive sheeting to prevent dust and dirt spreading to adjacent landscape areas and vegetation, and to create a neat and tidy visual appearance. (Portion I) | The item was rectified by the Contractor and inspected on 12 January 2017. |
| Impact                  | 18 January 2017 | Open stockpiles shall be covered by unobtrusive sheeting to prevent dust and dirt spreading to adjacent landscape areas and vegetation, and to create a neat and tidy visual appearance. (Zone 4)    | The item was rectified by the Contractor and inspected on 26 January 2017. |
| General<br>Condition    |                 | NA                                                                                                                                                                                                   |                                                                            |

Room 723 & 725, 7/F, Block B,

Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong.. : (852)-24508238 : (852)-24508032 Fax Email : mcl@fugro.com.hk



# Appendix N

**Outstanding Issues and Deficiencies** 

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, Hong Kong.. : (852)-24508238 : (852)-24508032 : mcl@fugro.com.hk Tel Fax Email



Summary of Outstanding Issues and Deficiencies in the Reporting Month

| Parameters                       | Outstanding Issues | Deficiencies                                                     |
|----------------------------------|--------------------|------------------------------------------------------------------|
| Air Quality                      | NA                 |                                                                  |
| Noise                            | NA                 |                                                                  |
| Water Quality                    | NA                 |                                                                  |
| Chemical and Waste<br>Management | NA                 | Any items of deficiencies can be referred to <b>Appendix M</b> . |
| Land Contamination               | NA                 |                                                                  |
| Landscape and<br>Visual Impact   | NA                 |                                                                  |
| General Condition                | NA                 |                                                                  |
| Others                           | NA                 |                                                                  |

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong, : (852)-24508238 : (852)-24508032 Fax Hong Kong. Email : mcl@fugro.com



# Appendix E

**Monthly EM&A Report** For Contract No. KL/2015/02 Kai Tak Development - Stage 5A Infrastructure at Former North Apron Area

# **Civil Engineering and Development Department**

# EP-337/2009 – New Distributor Roads Serving the Planned KTD

Contract No. KLN/2016/04
Environmental Monitoring Works for
Contract No. KL/2015/02
Kai Tak Development – Stage 5A Infrastructure
at Former North Apron Area

Monthly EM&A Report

16 to 31 January 2017

(version 1.0)

Approved By

(Environmental Team Leader)

REMARKS:

The information supplied and contained within this report is, to the best of our knowledge, correct at the time of printing.

CINOTECH accepts no responsibility for changes made to this report by third parties

## CINOTECH CONSULTANTS LTD

Room 1710, Technology Park, 18 On Lai Street, Shatin, NT, Hong Kong Tel: (852) 2151 2083 Fax: (852) 3107 1388 Email: info@cinotech.com.hk



Date

Our Ref.

14 February 2017

MCL/ED/0108/2017/C

Room 723 & 725, 7/F, Block B, Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Fong,

Hong Kong

Tel : +852-2450 8238 : +852-2450 8032 E-mail: mcl@fugro.com.hk

Website: www.materialab-consultant.com

Cinotech Consultants Limited Rm 1710, Technology Park, 18 On Lai Street, Shatin, New Territories. Hong Kong

BY EMAIL

Attn.: Dr. Priscilla Choy

Dear Madam.

Contract No. KL/2015/02 Kai Tak Development -Stage 5A Infrastructure at Former North Apron Verification of Monthly EM&A Report for 16 to 31 January 2017

We refer to your emails dated 7, 10 and 14 February 2017 regarding the Monthly EM&A Report for 16 to 31 January 2017 for the captioned project prepared by the ET.

We have no further comment and hereby verify the Report in accordance with Clause 3.3 of Environmental Permit no. EP-337/2009.

Should you require further information, please do not hesitate to contact Mr. Wingo So at 3565 4374 or the undersigned on 3565 4114.

Assuring you of our best attention at all times.

Yours faithfully, For and on behalf of MATERIALAB CONSULTANTS LIMITED

Colin K. L. Yung

Independent Environmental Checker

CY/ws

CFDD -C.C.

Attn.: Ms. K. Pong

AECOM -

Attn.: Mr. Keith Chu Attn.: Mr. John Yam Attn.: Mr. Jacky Pun

# TABLE OF CONTENTS

|    | EXECUTIVE SUMMARY                                                                     | 1  |
|----|---------------------------------------------------------------------------------------|----|
|    | Introduction                                                                          |    |
|    | Environmental Monitoring Works                                                        |    |
|    | Environmental Licenses and Permits                                                    |    |
|    | Key Information in the Reporting Month                                                |    |
|    | Future Key Issues                                                                     | 3  |
| 1. | INTRODUCTION                                                                          | 4  |
|    | Background                                                                            | 4  |
|    | Project Organizations                                                                 |    |
|    | Construction Activities undertaken during the Reporting Month                         |    |
|    | Summary of EM&A Requirements                                                          |    |
| 2. | AIR QUALITY                                                                           |    |
| 4. | -                                                                                     |    |
|    | Monitoring Requirements                                                               |    |
|    | Monitoring Locations                                                                  |    |
|    | Monitoring Equipment                                                                  |    |
|    | Monitoring Parameters, Frequency and Duration                                         |    |
|    | Monitoring Methodology and QA/QC Procedure                                            |    |
|    |                                                                                       |    |
| 3. | NOISE                                                                                 | 12 |
|    | Monitoring Requirements                                                               | 12 |
|    | Monitoring Locations                                                                  |    |
|    | Monitoring Equipment                                                                  | 12 |
|    | Monitoring Parameters, Frequency and Duration                                         | 12 |
|    | Monitoring Methodology and QA/QC Procedures                                           | 13 |
|    | Maintenance and Calibration                                                           | 13 |
|    | Results and Observations                                                              | 13 |
| 4. | COMPARISON OF EM&A RESULTS WITH EIA PREDICTIONS                                       | 16 |
| 5. | LANDSCAPE AND VISUAL                                                                  | 17 |
|    | Monitoring Requirements                                                               | 17 |
|    | Results and Observations.                                                             |    |
| _  |                                                                                       |    |
| 6. | ENVIRONMENTAL AUDIT                                                                   |    |
|    | Site Audits                                                                           |    |
|    | Review of Environmental Monitoring Procedures                                         |    |
|    | Status of Environmental Licensing and Permitting                                      |    |
|    | Status of Waste Management                                                            |    |
|    | Implementation Status of Environmental Mitigation Measures                            |    |
|    | Summary of Mitigation Measures Implemented                                            |    |
|    | Implementation Status of Event Action Plans                                           | 19 |
|    | Summary of Complaint, Warning, Notification of any Summons and Successful Prosecution | 20 |
| 7. | FUTURE KEY ISSUES                                                                     |    |
| •  |                                                                                       |    |
|    | Key Issues for the Coming Month                                                       |    |
|    | Monitoring Schedule for the Next Month                                                | 22 |

| 8. | CONCLUSIONS AND RECOMMENDATIONS | 23 |
|----|---------------------------------|----|
|    | Conclusions                     | 23 |
|    | Recommendations                 | 23 |

# LIST OF TABLES

| Table I   | Air Quality and Noise Monitoring Stations for this Project                 |
|-----------|----------------------------------------------------------------------------|
| Table II  | Non-compliance Recorded for the Project in the Reporting Month             |
| Table III | 1 0                                                                        |
|           | Summary Table for Key Information in the Reporting Month                   |
| Table 1.1 | Key Project Contacts                                                       |
| Table 1.2 | Construction Programme Showing the Inter-Relationship with Environmental   |
|           | Protection/Mitigation Measures                                             |
| Table 2.1 | Locations for Air Quality Monitoring                                       |
| Table 2.2 | Air Quality Monitoring Equipment                                           |
| Table 2.3 | Impact Dust Monitoring Parameters, Frequency and Duration                  |
| Table 2.4 | Summary Table of Air Quality Monitoring Results during the reporting month |
| Table 3.1 | Noise Monitoring Stations                                                  |
| Table 3.2 | Noise Monitoring Equipment                                                 |
| Table 3.3 | Noise Monitoring Parameters, Frequency and Duration                        |
| Table 3.4 | Baseline Noise Level and Noise Limit Level for Monitoring Stations         |
| Table 3.5 | Summary Table of Noise Monitoring Results during the Reporting Month       |
| Table 4.1 | Comparison of 1-hr TSP data with EIA predictions                           |
| Table 4.2 | Comparison of 24-hr TSP data with EIA predictions                          |
| Table 4.3 | Comparison of Noise Monitoring Data with EIA predictions                   |
| Table 6.1 | Summary of Environmental Licensing and Permit Status                       |
| Table 6.2 | Observations and Recommendations of Site Inspections                       |
|           |                                                                            |

# LIST OF FIGURES

| Figure 1 | Site Layout Plan                                                |
|----------|-----------------------------------------------------------------|
| Figure 2 | Air Quality Monitoring Stations under Contract No.: KLN/2013/16 |
| Figure 3 | Noise Monitoring Stations under Contract No.: KLN/2013/16       |
| Figure 4 | Locations of Wind Data Monitoring Equipment                     |

# LIST OF APPENDICES

| A | Action and Limit Levels for Air Quality and Noise                      |
|---|------------------------------------------------------------------------|
| В | Copies of Calibration Certificates                                     |
| C | Weather Information                                                    |
| D | Environmental Monitoring Schedules                                     |
| E | 1-hour TSP Monitoring Results and Graphical Presentations              |
| F | 24-hour TSP Monitoring Results and Graphical Presentations             |
| G | Noise Monitoring Results and Graphical Presentations                   |
| H | Summary of Exceedance                                                  |
| I | Site Audit Summary                                                     |
| J | Event Action Plans                                                     |
| K | Environmental Mitigation Implementation Schedule (EMIS)                |
| L | Summaries of Environmental Complaint, Warning, Summon and Notification |
|   | of Successful Prosecution                                              |
| M | Summary of Waste Generation and Disposal Records                       |
|   |                                                                        |

# Monthly EM&A Report – 16 to 31 January 2017

#### **EXECUTIVE SUMMARY**

#### Introduction

- 1. This is the 1<sup>st</sup> Monthly Environmental Monitoring and Audit Report prepared by Cinotech Consultants Ltd. for "Contract No. KL/2015/02 Kai Tak Development Stage 5A Infrastructure at Former North Apron Area" (Hereafter referred to as "the Project"). This contract comprises one Schedule 2 designated project (DP), namely the new distributor road D1 serving the planned KTD. The DP is part of the designated project under Environmental Permit (EP) No.: EP-337/2009 ("New distributor roads serving the planned Kai Tak Development") respectively. This report documents the findings of EM&A Works conducted from 16 31 January 2017.
- 2. With reference to the same principle of EIA report of the Project, air quality monitoring stations within 500m and noise monitoring stations within 300m from the boundary of this Project are considered as relevant monitoring locations. In such regard, the relevant air quality and noise monitoring locations are tabulated in **Table I** (see **Figure 2 and 3** for their locations).

Table I – Air Quality and Noise Monitoring Stations for this Project

| Locations                         | Monitoring Stations In<br>accordance with EM&A<br>Manual | Alternative Monitoring Stations |  |  |  |
|-----------------------------------|----------------------------------------------------------|---------------------------------|--|--|--|
| Air Quality Monitoring Stations   |                                                          |                                 |  |  |  |
| AM2 - Lee Kau Yan Memorial School | Yes                                                      | N/A                             |  |  |  |
| Noise Monitoring Stations         |                                                          |                                 |  |  |  |
| M3 - Cognitio College             | Yes                                                      | N/A                             |  |  |  |
| M4 - Lee Kau Yan Memorial School  | Yes                                                      | N/A                             |  |  |  |
| M5 – Nam Yuen                     | No                                                       | M5(C) – Mercy Grace's Home      |  |  |  |

3. According to the Environmental Monitoring and Audit Manual (EM&A Manual) of the Kai Tak Development (KTD) Schedule 3 Environmental Impact Assessment (EIA) Report, the impact monitoring at the designated monitoring stations as required in KTD EM&A Manual under the EP, have been conducted in Contract No. KLN/2013/16 – Environmental Monitoring Works for Kai Tak Development under Schedule 3 of KTD, which is on-going starting from December 2010. The impact monitoring data under Contract No. KLN/2013/16 will be adopted for the Project. Therefore, this report presents the air quality and noise monitoring works extracted from Contract No. KLN/2013/16.

1

- 4. The major site activities undertaken in the reporting month included:
  - Bored piling works at abutment A02;
  - Demolition of existing concrete structure for construction of subway SW6;
  - Construction of box culvert b3; and
  - Excavation for box culvert b3, b4 & b5

# **Environmental Monitoring Works**

- 5. Environmental monitoring for the Project was performed in accordance with the EM&A Manual and the monitoring results were checked and reviewed. Site Inspections/Audits were conducted once per week. The implementation of the environmental mitigation measures, Event Action Plans and environmental complaint handling procedures were also checked.
- 6. Summary of the non-compliance in the reporting month for the Project is tabulated in Table II.

Table II Non-compliance Recorded for the Project in the Reporting Month

| Parameter     | No. of Project-rela | Action Taken |              |
|---------------|---------------------|--------------|--------------|
| 1 at afficter | Action Level        | Limit Level  | Action Taken |
| 1-hr TSP      | 0                   | 0            | N/A          |
| 24-hr TSP     | 0                   | 0            | N/A          |
| Noise         | 0                   | 0            | N/A          |

1-hour & 24-hour TSP Monitoring

7. All 1-hour & 24-hour TSP monitoring was conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded.

Construction Noise Monitoring

8. All construction noise monitoring was conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded.

## **Environmental Licenses and Permits**

- 9. Licenses/Permits granted to the Project include the Environmental Permit (EP) for the Project, EP-337/2009 issued on 23 April 2009.
- 10. Construction Noise Permit (License No.: GW-RE0033-17 & GW-RE1236-16).
- 11. Billing Account for Construction Waste Disposal (A/C# 7026164).

## **Key Information in the Reporting Month**

12. Summary of key information in the reporting month is tabulated in **Table III**.

Table III Summary Table for Key Information in the Reporting Month

| Event                                                | Event Details |        | Action Taken | Status | Remark |
|------------------------------------------------------|---------------|--------|--------------|--------|--------|
| Event                                                | Number        | Nature | Action Taken | Status | Kemark |
| Complaint received                                   | 0             |        | N/A          | N/A    |        |
| Reporting<br>Changes                                 | 0             |        | N/A          | N/A    |        |
| Notifications of any summons & prosecutions received | 0             |        | N/A          | N/A    |        |

# **Future Key Issues**

- 13. The future key environmental issues in the coming month include:
  - Dust generation from stockpiles of dusty materials, exposed site area, excavation works and rock breaking activities;
  - Water spraying for dust generating activity and on haul road;
  - Proper storage of construction materials on site;
  - Storage of chemicals/fuel and chemical waste/waste oil on site;
  - Accumulation of general and construction waste on site;
  - Noise from operation of the equipment, especially for rock-breaking activities, piling works and machinery on-site;
  - Wastewater and runoff discharge from site;
  - Regular removal of silt, mud and sand along u-channels and sedimentation tanks; and
  - Review and implementation of temporary drainage system for the surface runoff.

#### 1. INTRODUCTION

#### **Background**

- 1.1 The Kai Tak Development (KTD) is located in the south-eastern part of Kowloon Peninsula, comprising the apron and runway areas of the former Kai Tak Airport and existing waterfront areas at To Kwa Wan, Ma Tau Kok, Kowloon Bay, Kwun Tong and Cha Kwo Ling. It covers a land area of about 328 hectares. Stage 5A Infrastructure at Former North Apron Area is one of the construction stages of KTD. It contains one Schedule 2 DP including new distributor roads serving the planned KTD. The general layout of the Project is shown in **Figure 1.**
- 1.2 An Environmental Permit (EP) No. EP-337/2009 was issued on 23 April 2009 for new distributor roads serving the planned KTD to Civil Engineering and Development Department as the Permit Holder.
- 1.3 A study of environmental impact assessment (EIA) was undertaken to consider the key issues of air quality, noise, water quality, waste, land contamination, cultural heritage and landscape and visual impact, and identify possible mitigation measures associated with the works. An EIA Report (Register No. AEIAR-130/2009) was approved by the Environmental Protection Department (EPD) on 4 April 2009.
- 1.4 Cinotech Consultants Limited (Cinotech) was commissioned by Civil Engineering and Development Department (CEDD) to undertake the role of the Environmental Team (ET) for the Contract No. KL/2015/02 Stage 5A Infrastructure at Former North Apron Area. The construction work under KL/2015/02 comprises the construction of part of the Road D1 under the EP (EP-337/2009).
- 1.5 Cinotech Consultants Limited was commissioned by Civil Engineering and Development Department (CEDD) to undertake the Environmental Monitoring and Audit (EM&A) works for the Project. The commencement date of construction of Road D1 (part) under this Contract was on 16 January 2017.
- 1.6 This is the 1<sup>st</sup> Monthly EM&A report summarizing the EM&A works for the Project from 16 31 January 2017.

## **Project Organizations**

- 1.7 Different parties with different levels of involvement in the project organization include:
  - Project Proponent Civil Engineering and Development Department (CEDD).
  - The Engineer and the Engineer's Representative (ER) AECOM Asia Co. Ltd (AECOM).
  - Environmental Team (ET) Cinotech Consultants Limited (Cinotech).
  - Independent Environmental Checker (IEC) MateriaLab Consultants Limited (MCL).
  - Contractor Peako Wo Hing Joint Venture (PWHJV).

1.8 The key contacts of the Project are shown in **Table 1.1**.

Table 1.1 Key Project Contacts

| Party    | Role                                    | Contact Person | Position                                | Phone No. | Fax No.   |
|----------|-----------------------------------------|----------------|-----------------------------------------|-----------|-----------|
| CEDD     | Project<br>Proponent                    | Ms. K. Pong    | Senior Engineer                         | 2301 1466 | 2369 4980 |
| AECOM    | Engineer's Representative               | Mr. John Yam   | SRE                                     | 2798 0771 | 2210 6110 |
| GI.      | Environmental                           |                | Environmental<br>Team Leader            | 2151 2089 | 2407 4200 |
| Cinotech | l Team                                  | Ms. Ivy Tam    | Audit Team Leader                       | 2151 2090 | 3107 1388 |
| MCL      | Independent<br>Environmental<br>Checker | Mr. Colin Yung | Independent<br>Environmental<br>Checker | 3565 4114 | 2450 8032 |
| PWHJV    | Contractor                              | Mr. W.M. Wong  | Site Agent                              | 6386 3535 | 2398 8301 |

# Construction Activities undertaken during the Reporting Month

- 1.9 The site activities undertaken in the reporting month included:
  - Bored piling works at abutment A02;
  - Demolition of existing concrete structure for construction of subway SW;
  - Construction of box culvert b3; and
  - Excavation for box culvert b3, b4 & b5
- 1.10 The construction programme showing the inter-relationship with environmental protection/mitigation measures are presented in **Table 1.2**.

Table 1.2 Construction Programme Showing the Inter-Relationship with Environmental Protection/Mitigation Measures

| Construction Major Environmental |                                                        | Control Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|----------------------------------|--------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Works                            | Impact                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| As mentioned in Section 1.9      | Noise, dust impact, water quality and waste generation | Sufficient watering of the works site with active dust emitting activities; Properly cover the stockpiles; On-site waste sorting and implementation of trip ticket system Appropriate desilting/sedimentation devices provided on site for treatment before discharge; Use of quiet plant and well-maintained construction plant; Provide movable noise barrier; Well maintain the drainage system to prevent the spillage of wastewater during heavy rainfall; Provide sufficient mitigation measures as recommended in Approved EIA Report/Lease requirement. |

# **Summary of EM&A Requirements**

- 1.11 The EM&A programme requires construction noise monitoring, air quality monitoring, landscape and visual monitoring and environmental site audit. The EM&A requirements for each parameter are described in the following sections, including:
  - All monitoring parameters;
  - Action and Limit levels for all environmental parameters;
  - Event Action Plans;
  - Environmental requirements and mitigation measures, as recommended in the EM&A Manual under the EP.
- 1.12 The advice on the implementation status of environmental protection and pollution control/mitigation measures is summarized in Section 6 of this report.
- 1.13 This report presents the monitoring results, observations, locations, equipment, period, methodology and QA/QC procedures of the required monitoring parameters, namely air quality and noise levels and audit works for the Project from 16 31 January 2017.

# 2. AIR QUALITY

# **Monitoring Requirements**

2.1 According to EM&A Manual under the EP, 1-hour and 24-hour TSP monitoring were conducted to monitor the air quality for this Project. For regular impact monitoring, a sampling frequency of at least once in every six days at all of the monitoring stations for 24-hour TSP monitoring. For 1-hour TSP monitoring, the sampling frequency of at least three times in every six days shall be undertaken when the highest dust impact occurs. **Appendix** A shows the established Action/Limit Levels for the environmental monitoring works.

# **Monitoring Locations**

2.2 One designated monitoring station was selected for air quality monitoring programme. Impact dust monitoring was conducted at the air quality monitoring station, Lee Kau Yan Memorial School (AM2) in the reporting month. **Table 2.1** describes the air quality monitoring locations, which are also depicted in **Figure 2**.

**Table 2.1** Locations for Air Quality Monitoring

| Monitoring Stations | Locations                   | Location of Measurement  |
|---------------------|-----------------------------|--------------------------|
| AM2                 | Lee Kau Yan Memorial School | Rooftop (about 8/F) Area |

# **Monitoring Equipment**

2.3 **Table 2.2** summarizes the equipment used in the impact air monitoring programme. Copies of calibration certificates are attached in **Appendix B**.

**Table 2.2 Air Quality Monitoring Equipment** 

| Equipment             | Model and Make                                      | Quantity |
|-----------------------|-----------------------------------------------------|----------|
| Calibrator            | TISCH TE-5025A                                      | 1        |
| 1-hour TSP Dust Meter | Laser Dust Monitor – Model LD-3, LD-3B, AEROCET-531 | 6        |
| HVS Sampler           | GMWS 2310 c/w of TSP sampling inlet                 | 1        |
| Wind Anemometer       | Davis Weather Monitor II, Model no. 7440            | 1        |

## **Monitoring Parameters, Frequency and Duration**

2.4 **Table 2.3** summarizes the monitoring parameters and frequencies of impact dust monitoring for the whole construction period. The air quality monitoring schedule for the reporting month is shown in **Appendix D**.

 Table 2.3
 Impact Dust Monitoring Parameters, Frequency and Duration

| Parameters | Frequency            |
|------------|----------------------|
| 1-hr TSP   | Three times / 6 days |
| 24-hr TSP  | Once / 6 days        |

# Monitoring Methodology and QA/QC Procedure

1-hour TSP Monitoring

(Equipment: Sibata; Model no. LD-3, LD-3B)

# **Measuring Procedures**

- 2.5 The measuring procedures of the 1-hour dust meters were in accordance with the Manufacturer's Instruction Manual as follows:
  - Pull up the air sampling inlet cover
  - Change the Mode 0 to BG with once
  - Push Start/Stop switch once
  - Turn the knob to SENSI.ADJ and press it
  - Push Start/Stop switch once
  - Return the knob to the position MEASURE slowly
  - Push the timer set switch to set measuring time
  - Remove the cap and make a measurement

# Maintenance/Calibration

2.6 The following maintenance/calibration was required for the direct dust meters:

Check the meter at a 3-month interval and calibrate the meter at a 1-year interval throughout all stages of the air quality monitoring.

24-hour TSP Monitoring

#### Instrumentation

2.7 High volume (HVS) samplers (Model GMWS-2310 Accu-Vol) completed with appropriate sampling inlets were employed for 24-hour TSP monitoring. The sampler was composed of a motor, a filter holder, a flow controller and a sampling inlet and its performance specification complied with that required by USEPA Standard Title 40, Code of Federation Regulations Chapter 1 (Part 50). Moreover, the HVS also met all the requirements in section 2.5 of the updated EM&A Manual.

## Operating/Analytical Procedures

- 2.8 Operating/analytical procedures for the operation of HVS were as follows:
  - A horizontal platform was provided with appropriate support to secure the samplers against gusty wind.
  - No two samplers were placed less than 2 meters apart.

- The distance between the sampler and an obstacle, such as buildings, was at least twice the height that the obstacle protrudes above the sampler.
- A minimum of 2 meters of separation from walls, parapets and penthouses was required for rooftop samples.
- A minimum of 2 meters separation from any supporting structure, measured horizontally was required.
- No furnaces or incineration flues were nearby.
- Airflow around the sampler was unrestricted.
- The sampler was more than 20 meters from the drip line.
- Any wire fence and gate, to protect the sampler, should not cause any obstruction during monitoring.
- 2.9 Prior to the commencement of the dust sampling, the flow rate of the high volume sampler was properly set (between 1.1 m³/min. and 1.4 m³/min.) in accordance with the manufacturer's instruction to within the range recommended in USEPA Standard Title 40, CFR Part 50.
- 2.10 For TSP sampling, fiberglass filters have a collection efficiency of > 99% for particles of 0.3µm diameter were used.
- 2.11 The power supply was checked to ensure the sampler worked properly. On sampling, the sampler was operated for 5 minutes to establish thermal equilibrium before placing any filter media at the designated air monitoring station.
- 2.12 The filter holding frame was then removed by loosening the four nuts and a weighted and conditioned filter was carefully centered with the stamped number upwards, on a supporting screen.
- 2.13 The filter was aligned on the screen so that the gasket formed an airtight seal on the outer edges of the filter. Then the filter holding frame was tightened to the filter holder with swing bolts. The applied pressure should be sufficient to avoid air leakage at the edges.
- 2.14 The shelter lid was closed and secured with the aluminum strip.
- 2.15 The timer was then programmed. Information was recorded on the record sheet, which included the starting time, the weather condition and the filter number (the initial weight of the filter paper can be found out by using the filter number).
- 2.16 After sampling, the filter was removed and sent to the HOKLAS laboratory (Wellab Ltd.) for weighing. The elapsed time was also recorded.
- 2.17 Before weighing, all filters were equilibrated in a conditioning environment for 24 hours. The conditioning environment temperature should be between 25°C and 30°C and not vary by more than ±3°C; the relative humidity (RH) should be < 50% and not vary by more than ±5%. A convenient working RH is 40%.

# Maintenance/Calibration

- 2.18 The following maintenance/calibration was required for the HVS:
  - The high volume motors and their accessories were properly maintained. Appropriate maintenance such as routine motor brushes replacement and electrical wiring checking were made to ensure that the equipment and necessary power supply are in good working condition.
  - High volume samplers were calibrated at bi-monthly intervals using TE-5025A Calibration Kit throughout all stages of the air quality monitoring.

#### **Results and Observations**

- 2.19 All 1-hour TSP monitoring was conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded.
- 2.20 All 24-hour TSP monitoring was conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded.
- 2.21 The air temperature, precipitation and the relative humidity data was obtained from Hong Kong Observatory where the wind speed and wind direction were recorded by the installed Wind Anemometer set at rooftop (about 8/F) Lee Kau Yan Memorial School. The location is shown in **Figure 4**. This weather information for the reporting month is summarized in **Appendix C.**
- 2.22 The monitoring data and graphical presentations of 1-hour and 24-hour TSP monitoring results are shown in **Appendices E and F** respectively.
- 2.23 The summary of exceedance record in reporting month is shown in **Appendix H**. No exceedance was recorded for the air quality monitoring.
- 2.24 According to our field observations, the major dust source identified at the designated air quality monitoring stations are as follows:

| Station                               | Major Dust Source                     |
|---------------------------------------|---------------------------------------|
|                                       | Road Traffic Dust                     |
| AM2 – Lee Kau Yan Memorial School     | Exposed site area and open stockpiles |
| AWIZ – Lee Kau Tali Wellioffal School | Excavation works                      |
|                                       | Site vehicle movement                 |

2.25 **Table 2.4** shows the summary of air quality monitoring results during the reporting month.

Kai Tak Development – Stage 5A Infrastructure at Former North Apron Area

Monthly EM&A Report – 16 to 31 January 2017

Table 2.4 Summary Table of Air Quality Monitoring Results during the reporting month

| Parameter                  | Date      | Concentration (µg/m3) | Action Level,<br>µg/m3 | Limit Level,<br>µg/m3 |
|----------------------------|-----------|-----------------------|------------------------|-----------------------|
| AM2 – Lee Kau Yan Memorial | School    |                       |                        |                       |
|                            | 16-Jan-17 | 182.5                 |                        |                       |
|                            | 16-Jan-17 | 183.4                 |                        |                       |
|                            | 16-Jan-17 | 186.0                 |                        |                       |
|                            | 20-Jan-17 | 173.0                 | 346                    | 500                   |
| 1-hr TSP                   | 20-Jan-17 | 178.0                 |                        |                       |
|                            | 20-Jan-17 | 184.4                 |                        |                       |
|                            | 26-Jan-17 | 222.4                 |                        |                       |
|                            | 26-Jan-17 | 230.2                 |                        |                       |
|                            | 26-Jan-17 | 232.2                 |                        |                       |
|                            | 19-Jan-17 | 92.4                  |                        |                       |
| 24-hr TSP                  | 25-Jan-17 | 93.6                  | 157                    | 260                   |
|                            | 27-Jan-17 | 68.7                  |                        |                       |

#### 3. NOISE

# **Monitoring Requirements**

3.1 According to EM&A Manuals under the EP, construction noise monitoring was conducted to monitor the construction noise arising from the construction activities within KTD. The regular monitoring frequency for each monitoring station shall be on a weekly basis and conduct one set of measurements between 0700 and 1900 hours on normal weekdays. **Appendix A** shows the established Action and Limit Levels for the environmental monitoring works.

# **Monitoring Locations**

3.2 Three designated monitoring stations were selected for noise monitoring programme. Noise monitoring was conducted at three designated monitoring stations (M3, M4, M5(C)). **Figure 3** shows the locations of these stations.

**Table 3.1 Noise Monitoring Stations** 

| <b>Monitoring Stations</b> | Locations                   | <b>Location of Measurement</b> |  |
|----------------------------|-----------------------------|--------------------------------|--|
| M3                         | Cognitio College            | Rooftop (about 6/F) Area       |  |
| M4                         | Lee Kau Yan Memorial School | Rooftop (about 7/F) Area       |  |
| M5(C)*                     | Mercy Grace's Home          | Rooftop (about 5/F) Area       |  |

Remarks: \*

The noise monitoring works under Contract No. KLN/2013/16 at M6(A) – Kowloon City District Kai-Fong Association was rejected by the premise owner and the monitoring work was relocated to alternative monitoring station M6(C) – Mercy Grace's Home.

# **Monitoring Equipment**

**Table 3.2** summarizes the noise monitoring equipment. Copies of calibration certificates are provided in **Appendix B**.

**Table 3.2 Noise Monitoring Equipment** 

| Equipment                     | Model and Make    | Qty. |
|-------------------------------|-------------------|------|
| Integrating Sound Level Meter | SVAN 955 & 957    | 6    |
| Calibrator                    | SVAN 30A, B&K4231 | 5    |

#### Monitoring Parameters, Frequency and Duration

**Table 3.3** summarizes the monitoring parameters, frequency and total duration of monitoring. The noise monitoring schedule is shown in **Appendix D**.

 Table 3.3
 Noise Monitoring Parameters, Frequency and Duration

| Monitoring<br>Stations | Parameter                                                                                             | Period                                    | Frequency        | Measurement |
|------------------------|-------------------------------------------------------------------------------------------------------|-------------------------------------------|------------------|-------------|
| M3<br>M4<br>M5(C)      | L <sub>10</sub> (30 min.) dB(A)<br>L <sub>90</sub> (30 min.) dB(A)<br>L <sub>eq</sub> (30 min.) dB(A) | 0700-1900<br>hrs on<br>normal<br>weekdays | Once per<br>week | Façade      |

# Monitoring Methodology and QA/QC Procedures

- The Sound Level Meter was set on a tripod at a height of 1.2 m above the ground.
- The battery condition was checked to ensure the correct functioning of the meter.
- Parameters such as frequency weighting, the time weighting and the measurement time were set as follows:

frequency weighting
time weighting
Fast
time measurement
30 minutes

- Prior to and after each noise measurement, the meter was calibrated using a Calibrator for 94.0 dB at 1000 Hz. If the difference in the calibration level before and after measurement was more than 1.0 dB, the measurement would be considered invalid and repeat of noise measurement would be required after re-calibration or repair of the equipment.
- The wind speed was frequently checked with the portable wind meter.
- At the end of the monitoring period, the  $L_{eq}$ ,  $L_{90}$  and  $L_{10}$  were recorded. In addition, site conditions and noise sources were recorded on a standard record sheet.
- Noise measurement was paused temporarily during periods of high intrusive noise if possible and observation was recorded when intrusive noise was not avoided.
- Noise monitoring was cancelled in the presence of fog, rain, and wind with a steady speed exceeding 5 m/s, or wind with gusts exceeding 10 m/s.

#### **Maintenance and Calibration**

- 3.5 The microphone head of the sound level meter and calibrator were cleaned with a soft cloth at quarterly intervals.
- 3.6 The sound level meter and calibrator were checked and calibrated at yearly intervals.
- 3.7 Immediately prior to and following each noise measurement the accuracy of the sound level meter shall be checked using an acoustic calibrator generating a known sound pressure level at a known frequency. Measurements may be accepted as valid only if the calibration levels from before and after the noise measurement agree to within 1.0 dB.

# **Results and Observations**

- 3.8 All construction noise monitoring was conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded. The summary of exceedance record in reporting month is shown in **Appendix H**.
- 3.9 The baseline noise level and the Noise Limit Level at each designated noise monitoring station are presented in **Table 3.4**.

- 3.10 Noise monitoring results and graphical presentations are shown in **Appendix G**.
- 3.11 The major noise source identified at the designated noise monitoring stations are as follows:

| Monitoring<br>Stations | Locations                   | Major Noise Source                                                                        |  |
|------------------------|-----------------------------|-------------------------------------------------------------------------------------------|--|
| М3                     | Cognitio College            | Traffic Noise Daily school activities                                                     |  |
| M4                     | Lee Kau Yan Memorial School | Traffic Noise Site vehicle movement Excavation works Piling works Daily school activities |  |
| M5(C)                  | Mercy Grace's Home          | Traffic Noise<br>Site vehicle movement                                                    |  |

**Table 3.4** Baseline Noise Level and Noise Limit Level for Monitoring Stations

| Station | Baseline Noise Level, dB (A)  | Noise Limit Level, dB (A)     |  |
|---------|-------------------------------|-------------------------------|--|
|         | 76.3/78.6 <sup>(1)</sup>      |                               |  |
| M3      | (at 0700 – 1900 hrs on normal | 70*                           |  |
|         | weekdays)                     | (at 0700 – 1900 hrs on normal |  |
| M4      | 76.7                          | weekdays)                     |  |
|         | (at 0700 – 1900 hrs on normal | weekdays)                     |  |
|         | weekdays)                     |                               |  |
|         | N/A <sup>(2)</sup>            | 75                            |  |
| M5(C)   | (at 0700 – 1900 hrs on normal | (at 0700 – 1900 hrs on normal |  |
|         | weekdays)                     | weekdays)                     |  |

<sup>(\*)</sup> Noise Limit Level is 65 dB(A) during school examination periods.

Note (1): The baseline noise review report submitted under KLN/2013/16 for M3 was approved by EPD on 23<sup>rd</sup> August 2013. (Baseline Level was found to be 78.6 dB(A) at Rooftop of Cognitio College)

Note (2): The background Noise Level was recorded during the Lunch Hour of Construction Site (i.e. 12:00-13:00) under KLN/2013/16 and to be used as the referencing value for compliance checking for Noise Action and Limit Level.

| Table 3.5 | Summary | Table of Noise | Monitoring Result | s during the Ro | eporting Month |
|-----------|---------|----------------|-------------------|-----------------|----------------|
|           |         |                |                   |                 |                |

| Date                       | Measured Noise<br>Level,<br>Leq(30min) dB (A) | Baseline Level<br>dB (A)        | Construction Noise Level (1):<br>Leq(30min) dB (A) |  |  |
|----------------------------|-----------------------------------------------|---------------------------------|----------------------------------------------------|--|--|
| M3 – Cognitio              | M3 – Cognitio College                         |                                 |                                                    |  |  |
|                            |                                               | Background Noise <sup>(2)</sup> |                                                    |  |  |
| 16-Jan-17                  | 64.3                                          | 64.0                            | 52.5                                               |  |  |
| 26-Jan-17                  | 78.3                                          | 79.0                            | $78.3 \text{ Measured} \leq \text{Background}$     |  |  |
| M4 – Lee Kau               | M4 – Lee Kau Yan Memorial School              |                                 |                                                    |  |  |
| 16-Jan-17                  | 65.3                                          | 76.7                            | $65.3 \text{ Measured} \leq \text{Baseline}$       |  |  |
| 26-Jan-17                  | 73.9                                          | 70.7                            | 73.9 Measured $\leq$ Baseline                      |  |  |
| M5(C) – Mercy Grace's Home |                                               |                                 |                                                    |  |  |
|                            |                                               | Background Noise <sup>(2)</sup> |                                                    |  |  |
| 17-Jan-17                  | 77.1                                          | 77.1                            | 77.1 Measured $\leq$ Background                    |  |  |
| 23-Jan-17                  | 73.6                                          | 73.4                            | 60.1                                               |  |  |

Note (1) The noise level due to the construction work (CNL) was calculated by the following formula:

$$\text{CNL} = 10 \; \text{log} \; (10^{\text{MNL/10}} - 10^{\text{BNL/10}})$$

Remarks: MNL = Measured Noise Level BNL = Baseline Noise Level

(2): The background Noise Level was recorded during the Lunch Hour of Construction Site (i.e. 12:00-13:00) and to be used as the referencing value for compliance checking for Noise Action and Limit Level.

#### 4. COMPARISON OF EM&A RESULTS WITH EIA PREDICTIONS

4.1 The EM&A data was compared with the EIA predictions as summarized in Tables 4.1 to 4.3.

Table 4.1 Comparison of 1-hr TSP data with EIA predictions

|                                       | ]                                             | Predicted 1-hr TSP conc.                       |                                 |  |  |
|---------------------------------------|-----------------------------------------------|------------------------------------------------|---------------------------------|--|--|
| Station                               | Scenario1 (Mid<br>2009 to Mid<br>2013), µg/m3 | Scenario2 (Mid<br>2013 to Late<br>2016), µg/m3 | Reporting Month (Jan 17), µg/m3 |  |  |
| AM 2 – Lee Kau Yan<br>Memorial School | 290                                           | 312                                            | 196.9                           |  |  |

Table 4.2 Comparison of 24-hr TSP data with EIA predictions

|                                      | Predicted 24-hr TSP conc.                     |                                                |                                 |  |
|--------------------------------------|-----------------------------------------------|------------------------------------------------|---------------------------------|--|
| Station                              | Scenario1 (Mid<br>2009 to Mid<br>2013), μg/m3 | Scenario2 (Mid<br>2013 to Late<br>2016), µg/m3 | Reporting Month (Jan 17), µg/m3 |  |
| AM2 – Lee Kau Yan<br>Memorial School | 145                                           | 169                                            | 84.9                            |  |

Table 4.3 Comparison of Noise Monitoring Data with EIA predictions

| Stations                            | Predicted Mitigated Construction Noise Levels during Normal Working Hour (Leq (30min) dB(A)) | Reporting Month (Jan 17),<br>Leq (30min) dB(A) |
|-------------------------------------|----------------------------------------------------------------------------------------------|------------------------------------------------|
| M3 – Cognitio College               | 47 - 75                                                                                      | $52.5 - 78.3^{(1)}$                            |
| M4 – Lee Kau Yan<br>Memorial School | 47 – 74                                                                                      | $65.3 - 73.9^{(2)}$                            |
| M5(C) – Mercy Grace's<br>Home       | Not Predicted in EIA Report                                                                  | $60.1 - 77.1^{(1)}$                            |

#### Remark:

- (1) Since the background noise level recorded during 12:00 to 13:00 was higher than those recorded during the construction period, the recorded noise levels were considered non-valid exceedance of Noise Limit Level.
- (2) Since the baseline noise level was higher than those recorded during the construction period, the recorded noise levels were considered non-valid exceedance of Noise Limit Level.
- 4.2 The 1-hour TSP concentrations in the reporting month were below to the prediction in the approved Environmental Impact Assessment (EIA) Report.
- 4.3 The 24-hour TSP concentrations in the reporting month were below to the prediction in the approved Environmental Impact Assessment (EIA) Report.
- 4.4 The noise monitoring results in the reporting month at M3 were not within the range of predicted mitigated construction noise levels in the EIA report, please refer to the remark in Table 4.3 for details. The noise monitoring results in the reporting month at M4 were within the range of predicted mitigated construction noise levels in the EIA report. Mitigated construction noise levels at M5(C) were not predicted in EIA Report.

Monthly EM&A Report – 16 to 31 January 2017

#### 5. LANDSCAPE AND VISUAL

#### **Monitoring Requirements**

5.1 According to EM&A Manual of the Kai Tak Development EIA Study, ET shall monitor and audit the contractor's operation during the construction period on a weekly basis, and to report on the contractor's compliance.

#### **Results and Observations**

- 5.2 Site audits were carried out on a weekly basis to monitor and audit the timely implementation of landscape and visual mitigation measures within the site boundaries of this Project. The summaries of site audits are attached in **Appendix I**.
- 5.3 No non-compliance of the landscape and visual impact was recorded in the reporting month.
- 5.4 Should non-compliance of the landscape and visual impact occur, action in accordance with the action plan presented in **Appendix J** shall be performed.

#### 6. ENVIRONMENTAL AUDIT

#### **Site Audits**

- 6.1 Site audits were carried out on a weekly basis to monitor the timely implementation of proper environmental management practices and mitigation measures in the Project site. The summaries of site audits are attached in **Appendix I**.
- 6.2 Site audits were conducted on 20 and 26 January 2017 in the reporting month. No non-compliance was observed during the site audits.

## **Review of Environmental Monitoring Procedures**

6.3 The monitoring works conducted by the monitoring team were inspected regularly. The following observations have been recorded for the monitoring works:

#### Air Quality Monitoring

- The monitoring team recorded all observations around the monitoring stations within and outside the construction site.
- The monitoring team recorded the temperature and weather conditions on the monitoring days.

#### Noise Monitoring

- The monitoring team recorded all observations around the monitoring stations, which might affect the monitoring result.
- Major noise sources were identified and recorded. Other intrusive noise attributing to the result was trimmed off by pausing the monitoring temporarily.

#### Status of Environmental Licensing and Permitting

6.4 All permits/licenses obtained for the Project are summarized in **Table 6.1**.

 Table 6.1
 Summary of Environmental Licensing and Permit Status

| ,                             | ,               |            | *************************************** |
|-------------------------------|-----------------|------------|-----------------------------------------|
| Permit No.                    | Valid 1         | Period     | Ctatus                                  |
| Periiit No.                   | From To         |            | Status                                  |
| <b>Environmental Permit</b>   | (EP)            |            |                                         |
| EP-337/2009                   | 23/04/09        | N/A        | Valid                                   |
| Billing Account for Co        | nstruction Wast | e Disposal |                                         |
| A/C# 7026164                  | 20/10/16        | N/A        | Valid                                   |
| <b>Construction Noise Per</b> | mit (CNP)       | _          |                                         |
| GW-RE0033-17                  | 24/01/17        | 05/07/17   | Valid                                   |
| GW-RE1236-16                  | 05/01/17        | 29/06/17   | Valid                                   |

## **Status of Waste Management**

6.5 The amount of wastes generated by the major site activities of this Project during the reporting month is shown in **Appendix M**.

#### **Implementation Status of Environmental Mitigation Measures**

6.6 During site inspections in the reporting month, no non-conformance was identified. ET weekly site inspections were carried out during the reporting month and the observations and recommendations are summarized in **Table 6.2**.

**Table 6.2** Observations and Recommendations of Site Inspections

| Parameters                       | Date            | Observations and Recommendations                                                                                 | Follow-up                                                                  |
|----------------------------------|-----------------|------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|
| Water Quality                    | -1              |                                                                                                                  |                                                                            |
| Air Quality                      | 26 January 2017 | Observation: Water spray should be provided to the haul road and exposed area at Portion 2 for dust suppression. | Follow up action will be reported in the next reporting month.             |
| Noise                            | -               |                                                                                                                  |                                                                            |
| Waste/<br>Chemical<br>Management | 20 January 2017 | Reminder: Drip tray should be provided to the chemical containers placed near Portion 2.                         | Rectification/improvement was observed during the follow-up audit session. |
| Landscape<br>and Visual          | 20 January 2017 | Observation: Hoarding should be provided and erected at the site boundary of Portion 1.                          | Rectification/improvement was observed during the follow-up audit session. |
| Permits/<br>Licenses             |                 |                                                                                                                  |                                                                            |

#### **Summary of Mitigation Measures Implemented**

6.7 An updated summary of the EMIS is provided in **Appendix K**.

#### **Implementation Status of Event Action Plans**

6.8 The Event Action Plans for air quality, noise and landscape and visual are presented in **Appendix J**.

19

## 1-hr TSP Monitoring

6.9 No Action/Limit Level exceedance was recorded in the reporting month.

## 24-hr TSP Monitoring

6.10 No Action/Limit Level exceedance was recorded in the reporting month.

#### Construction Noise

6.11 No Action/Limit Level exceedance was recorded in the reporting month.

## Landscape and visual

6.12 No non-compliance was recorded in the reporting month.

## Summary of Complaint, Warning, Notification of any Summons and Successful Prosecution

6.13 The summaries of environmental complaint, warning, summon and notification of successful prosecution for the Project is presented in **Appendix L**.

#### 7. FUTURE KEY ISSUES

- 7.1 Major site activities undertaken for the coming two months include:
  - Pre-drilling works at pile cap S15;
  - Construction of temp road for TTA at Prince Edward Road East;
  - Construction of temp decking at the temp road;
  - Sheetpile driving works for SW6;
  - Excavation for DCS along Road L7 and D1;
  - Hoarding erection along temp road;
  - Construction of box culvert b3;
  - Excavation for box culvert b1, b4 & b5; and
  - Sewerage works near SCL tunnel

#### **Key Issues for the Coming Month**

- 7.2 Key environmental issues in the coming month include:
  - Wastewater and runoff discharge from site;
  - Regular removal of silt, mud and sand along u-channels and sedimentation tanks;
  - Review and implementation of temporary drainage system for the surface runoff;
  - Noise from operation of the equipment, especially for rock-breaking activities, piling works and machinery on-site;
  - Dust generation from stockpiles of dusty materials, exposed site area, excavation works and rock breaking activities;
  - Water spraying for dust generating activity and on haul road;
  - Proper storage of construction materials on site;
  - Storage of chemicals/fuel and chemical waste/waste oil on site;
  - Accumulation of general and construction waste on site.
- 7.3 The tentative program of major site activities and the impact prediction and control measures for the coming two months, i.e. February 2017 and March 2017 are summarized as follows:

| <b>Construction Works</b>   | Major Impact<br>Prediction                                        | Control Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-----------------------------|-------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| As mentioned in Section 7.1 | Air quality impact (dust)  Water quality impact (surface run-off) | <ul> <li>(a) Frequent watering of haul road and unpaved/exposed areas;</li> <li>(b) Frequent watering or covering stockpiles with tarpaulin or similar means; and</li> <li>(c) Watering of any earth moving activities.</li> <li>(a) Diversion of the collected effluent to de-silting facilities for treatment prior to discharge to public storm water drains;</li> <li>(b) Provision of adequate de-silting facilities for treating surface run-off and other collected effluents prior to discharge;</li> <li>(c) Provision of perimeter protection such as sealing of hoarding footings to avoid run-off from entering the existing storm water drainage system via public road; and</li> <li>(d) Provision of measures to prevent discharge into the</li> </ul> |
|                             | Noise Impact                                                      | stream.  (a) Scheduling of noisy construction activities if necessary to avoid persistent noisy operation;  (b) Controlling the number of plants use on site;  (c) Regular maintenance of machines; and  (d) Use of acoustic barriers if necessary.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

## **Monitoring Schedule for the Next Month**

7.4 The tentative environmental monitoring schedules for the next month are shown in **Appendix D**.

#### 8. CONCLUSIONS AND RECOMMENDATIONS

#### **Conclusions**

8.1 Environmental monitoring works were performed in the reporting month and all monitoring results were checked and reviewed.

## 1-hr TSP Monitoring

8.2 All 1-hr TSP monitoring was conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded.

#### 24-hr TSP Monitoring

8.3 All 24-hr TSP monitoring was conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded.

#### **Construction Noise Monitoring**

8.4 All construction noise monitoring was conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded.

#### Landscape and visual

8.5 No non-compliance was recorded in the reporting month.

#### Complaint and Prosecution

- 8.6 No environmental complaints and environmental prosecution were received in the reporting month.
- 8.7 No environmental prosecution was received in the reporting month.

#### Recommendations

8.8 According to the environmental audit performed in the reporting month, the following recommendations were made:

#### Air quality

• To provide water spraying o the haul road and exposed area for dust suppression.


#### Waste / Chemical Management


• To properly store the chemical containers into appropriate storage area.


#### Landscape and Visual


• To properly maintain and erect the hoarding at the site boundary.

## **FIGURES**

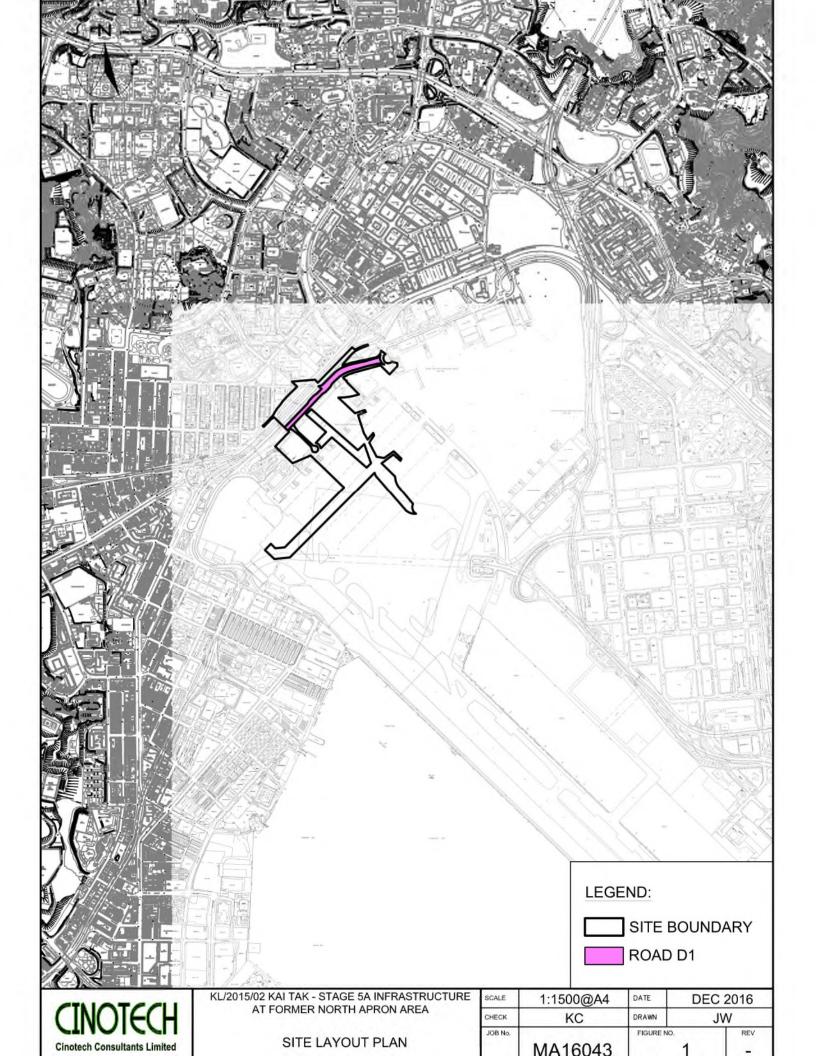

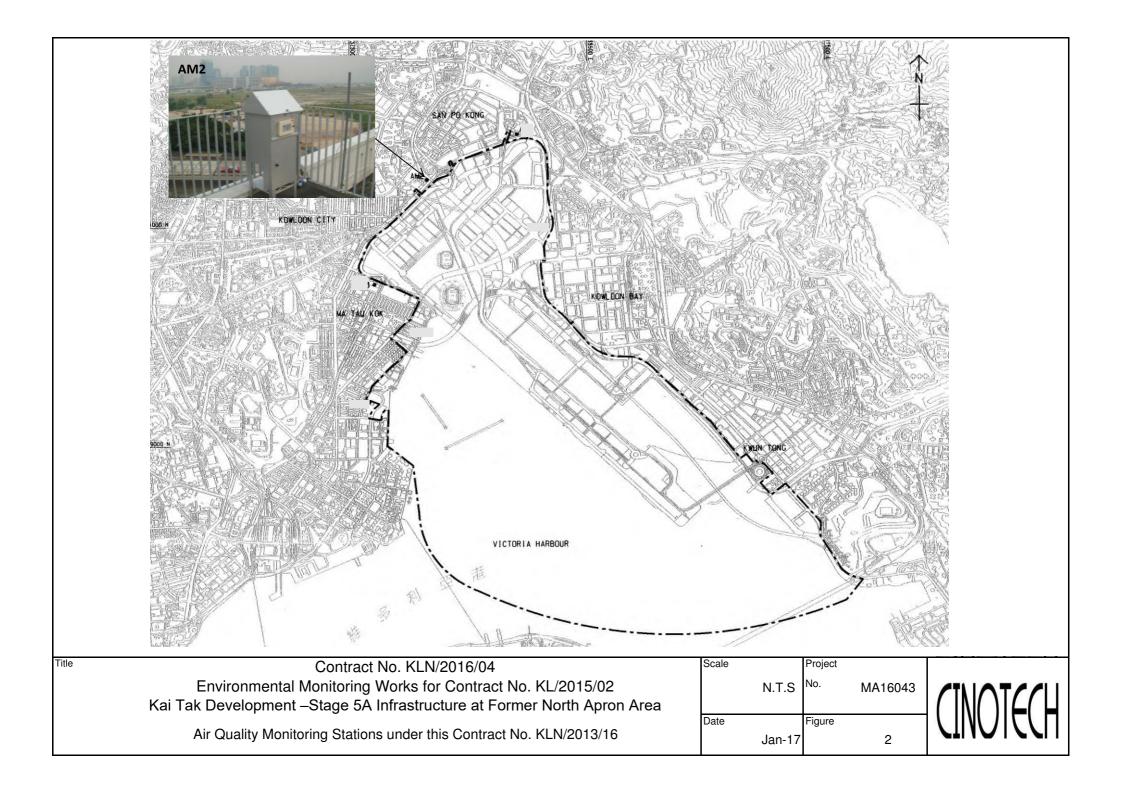

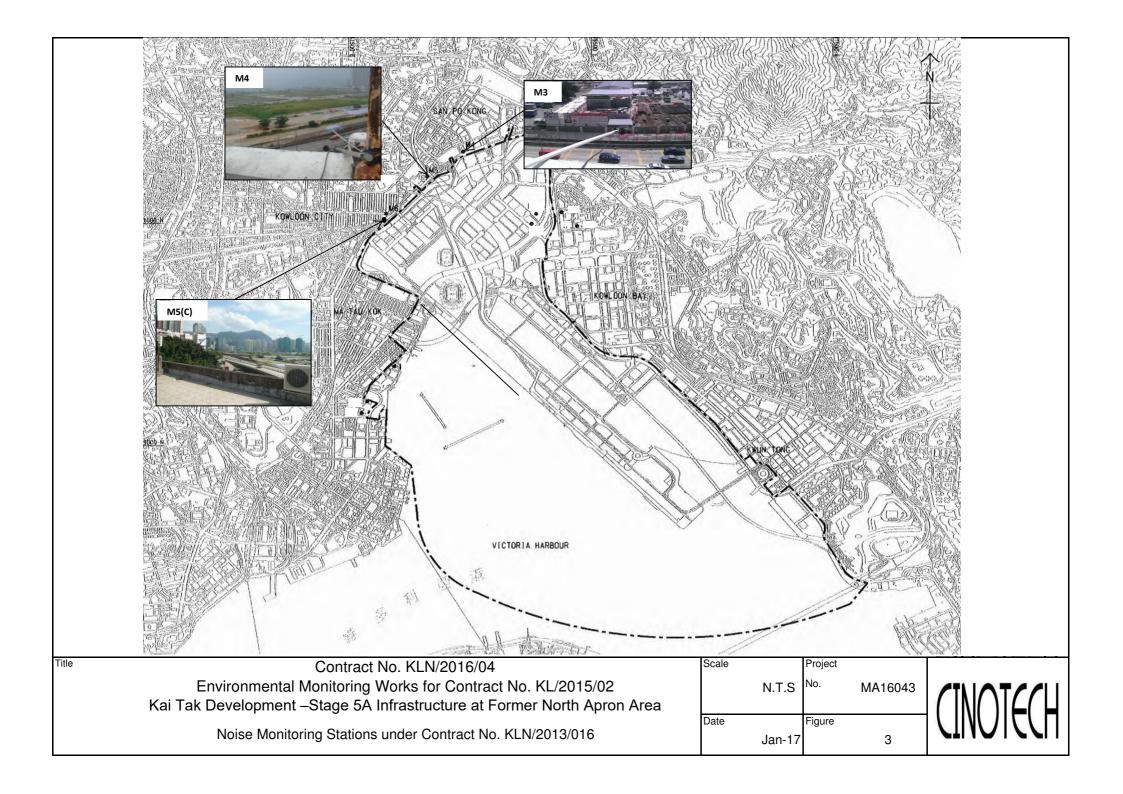

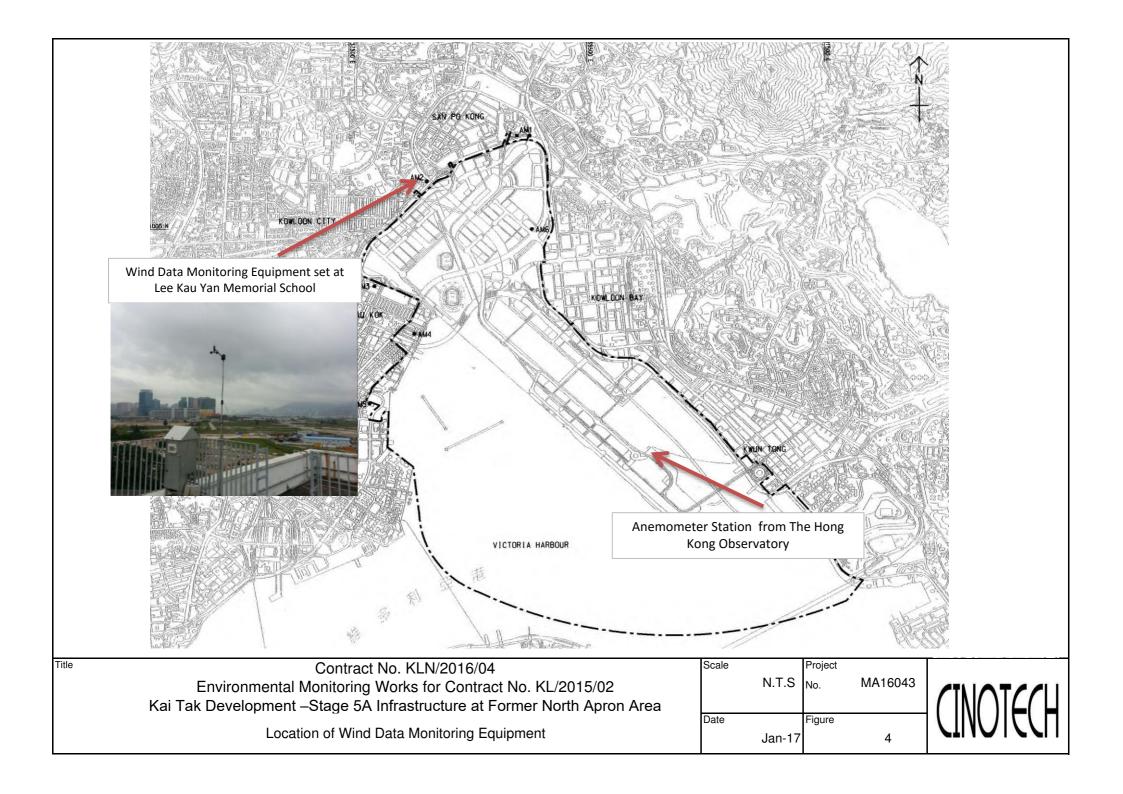

APPENDIX A
ACTION AND LIMIT LEVELS FOR AIR
QUALITY AND NOISE

## **Appendix A - Action and Limit Levels**

Table A-1 Action and Limit Levels for 1-Hour TSP

| Location | Action Level, μg/m <sup>3</sup> | Limit Level, μg/m³ |
|----------|---------------------------------|--------------------|
| AM2      | 346                             | 500                |

#### Table A-2 Action and Limit Levels for 24-Hour TSP

| Location | Action Level, μg/m <sup>3</sup> | Limit Level, μg/m³ |
|----------|---------------------------------|--------------------|
| AM2      | 157                             | 260                |

**Table A-3** Action and Limit Levels for Construction Noise

| Time Period                      | Action Level                              | Limit Level                  |
|----------------------------------|-------------------------------------------|------------------------------|
| 0700-1900 hrs on normal weekdays | When one documented complaint is received | 75 dB(A)<br>70dB(A)/65dB(A)* |

Remarks: If works are to be carried out during restricted hours, the conditions stipulated in the Construction Noise Permit (CNP) issued by the Noise Control Authority have to be followed. \*70dB(A) and 65dB(A) for schools during normal teaching periods and school examination periods, respectively.

APPENDIX B COPIES OF CALIBRATION CERTIFCATES

## High-Volume TSP Sampler 5-POINT CALIBRATION DATA SHEET



|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                             |                  |                                |                        |                                  | File No | MA14008/59/0039                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|------------------|--------------------------------|------------------------|----------------------------------|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Station                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | AM2 - Lee Kau               | Yan Memorial S   | School                         | Operator               | :WK                              |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Date:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 21-Nov-16                   | <del></del>      |                                | Next Due Date:         | : 20-Jan                         | -17     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Equipment No.:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | A-01-59                     |                  | _                              | Serial No.             | . 2354                           | -       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                             |                  |                                |                        |                                  |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 5.000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | T (V)                       | 000 -            | Ambient                        |                        |                                  |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Temperatu                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | ire, Ta (K)                 | 298.6            | Pressure, Pa                   | (mmHg)                 |                                  | 762.2   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| or the state of th |                             | 12000            | rifice Transfer Sta            | ndard Info             | 1040n                            | V 1     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Seria                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | No.:                        | 2896             | Slope, mc (CFM)                | T                      | Intercep                         | t ho    | 0.05070                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Last Calibr                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                             | 4-Mar-16         | Biope, me (CFWI)               | •                      | $bc = [\Delta H \times (Pa/76)]$ |         | -0.05079                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Next Calibr                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                             | 3-Mar-17         |                                |                        | x (Pa/760) x (298                |         | <i>*</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 1.521 041101                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                             |                  | <u> </u>                       | Spece Mirms            | A (1 10 / 00) A (2 / 0           | " = a)  | HFC .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 199 <del>4</del> , 201      |                  | Calibration of                 | TSP Sambler            |                                  |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Calibration                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | A Commercial Control of the | Or               | fice                           |                        | THE RESERVENCE AND A STATE       | HVS     | on the contract of the contrac |
| Point                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | ΔH (orifice), in. of water  |                  | 60) x (298/Ta)] <sup>1/2</sup> | Qstd (CFM)<br>X - axis | ΔW (HVS), in. of water           |         | 0) x (298/Ta)] <sup>1/2</sup> Y-axis                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 11.4                        | 3.38             |                                | 57.35                  | 7.3                              |         | 2.70                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 9.8                         | 3.13             |                                | 53.23                  | 6.4                              |         | 2.53                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 7.6                         | 2.76             |                                | 46.98                  | 5.0                              |         | 2.24                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 4.9                         |                  | 2.21                           | 37.89                  | 3.1                              |         | 1.76                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 3.3                         | 1.82             |                                | 31.25                  | 2.2                              |         | 1.48                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| By Linear Regr                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | ression of Y on X           |                  |                                |                        |                                  |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Slope , mw =                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                             |                  | ]                              | Intercept, bw          | -0.016                           | 58      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Correlation c                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                             |                  | 993                            | •                      |                                  |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| *If Correlation C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Coefficient < 0.99          | 0, check and rec | alibrate.                      |                        |                                  |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 88.500                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                             |                  |                                | Spania Brown - Cherry  |                                  |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 110                         |                  | Set Point C                    | alculation             |                                  |         | 100 CO                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | eld Calibration Co          |                  |                                |                        |                                  |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| rrom the Regres                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | sion Equation, the          | "Y" value acco   | rding to                       |                        |                                  |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                             | mw x (           | $Qstd + bw = [\Delta W]$       | (Pa/760) x (2)         | 98/Ta)] <sup>1/2</sup>           |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                             |                  | _                              |                        | ~ ~ ~ ~ ~ ~ ~ / / /              |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Therefore, Se                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | et Point; W = ( my          | w x Qstd + bw)   | x (760 / Pa) x (T              | Ca/298)=               | 4.12                             |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| - 1111                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                             |                  |                                |                        |                                  |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                             | <u> </u>         |                                |                        |                                  |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| D                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                             |                  |                                |                        |                                  |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Remarks:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                             |                  |                                |                        |                                  |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                             |                  |                                |                        |                                  |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Conducted ber                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 1 10-0                      | Ot               | V                              |                        |                                  |         | 110                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Conducted by:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | - 7                         | Signature:       | Kwa                            |                        |                                  | Date:   | 2111116                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Checked by:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                             | Signature:       |                                | 72                     |                                  | Date: C | 21 November de                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

# **High-Volume TSP Sampler** 5-POINT CALIBRATION DATA SHEET



|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                            |                  |                                   |                                           |                        | File No                     | MA14008/59/0040                                    |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------------|-----------------------------------|-------------------------------------------|------------------------|-----------------------------|----------------------------------------------------|
| Station                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | AM2 - Lee Kau              | Yan Memorial S   | School                            | Operator:                                 | WK                     | _                           |                                                    |
| Date:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 20-Jan-17                  |                  | Next Due D                        |                                           | 19-Mar-17              |                             |                                                    |
| Equipment No.:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | A-01-59                    |                  | _                                 | Serial No.                                | 2354                   |                             |                                                    |
| (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - (1) - |                            |                  | Ambient (                         | Condition                                 |                        |                             |                                                    |
| Temperatu                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | re Ta(K)                   | 287.8            | Pressure, Pa                      |                                           |                        | 770.6                       | Akada, gala perdipinak kendiren erak alam interior |
| 1 on pour                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 10, 10 (11)                | 207.0            | 11000010,14                       | (mm15)                                    |                        | 770.0                       |                                                    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                            | Ō                | rifice Transfer Sta               | ndard Inform                              | ıation                 |                             |                                                    |
| Seria                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | l No.:                     | 2896             | Slope, mc (CFM)                   | 0.0598                                    | Intercep               | t, bc                       | -0.05079                                           |
| Last Calibr                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | ration Date:               | 4-Mar-16         |                                   | me x Qstd + l                             | oc = [ΔH x (Pa/76      | 50) x (298/Ta)              | J <sup>1/2</sup>                                   |
| Next Calibi                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | ration Date:               | 3-Mar-17         |                                   | $\mathbf{Qstd} = \{ [\Delta \mathbf{H} :$ | x (Pa/760) x (298      | /Ta)] <sup>1/2</sup> -bc} / | me                                                 |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                            | •                |                                   |                                           |                        |                             |                                                    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                            |                  | Calibration of                    | TSP Sampler                               |                        |                             |                                                    |
| Calibration                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                            | Or               | rfice                             |                                           |                        | HVS                         |                                                    |
| Point                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | ΔH (orifice), in. of water | [ΔH x (Pa/76     | 60) x (298/Ta)] <sup>1/2</sup>    | Qstd (CFM)<br>X - axis                    | ΔW (HVS), in. of water | [ΔW x (Pa/76                | 50) x (298/Ta)] <sup>1/2</sup> Y-<br>axis          |
| 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 11.7                       | ,                | 3.50                              | 59.47                                     | 7.6                    |                             | 2.82                                               |
| 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 9.8                        |                  | 3.21                              | 54.50                                     | 6.5                    |                             | 2.61                                               |
| 3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 7.5                        | 2.81             |                                   | 47.78                                     | 5.1                    |                             | 2.31                                               |
| 4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 5.0                        | 2.29             |                                   | 39.17                                     | 3.2                    |                             | 1.83                                               |
| 5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 3.4                        | 1.89             |                                   | 32.45                                     | 2.3                    |                             | 1.55                                               |
| Slope , mw = Correlation o                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | coefficient* =             | 0.9              | 9988                              | Intercept, bw                             | -0.014                 | <b>1</b> 7                  |                                                    |
| *If Correlation (                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Coefficient < 0.99         | 0, check and rec | calibrate.                        |                                           |                        |                             |                                                    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                            |                  | Set Point C                       | alculation                                |                        |                             |                                                    |
| From the TSP Fi                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | ield Calibration C         | urve, take Qstd  | = 43 CFM                          |                                           |                        |                             |                                                    |
| From the Regres                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | ssion Equation, the        | e "Y" value acco | ording to                         |                                           |                        |                             |                                                    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                            |                  | O AT A PLANT                      | (D) (E) (A)                               | 00 m v1/2              |                             |                                                    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                            | mw x             | $Qstd + bw = [\Delta W]$          | x (Pa/760) x (2                           | 98/Ta)]***             |                             |                                                    |
| Therefore, S                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | et Point; W = ( m          | w x Qstd + bw)   | <sup>2</sup> x ( 760 / Pa ) x ( T | Ca / 298)=                                | 4.01                   |                             |                                                    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                            |                  |                                   |                                           |                        |                             |                                                    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                            |                  |                                   |                                           |                        |                             |                                                    |
| Remarks:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                            |                  |                                   |                                           |                        |                             |                                                    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                            |                  |                                   |                                           |                        |                             |                                                    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 1 -                        |                  | L                                 | 1                                         |                        |                             |                                                    |
| Conducted by:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | wk Tang                    | Signature:       | Kwa                               | <u>`</u>                                  |                        | Date:                       | 20/1/2017                                          |
| Checked by:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                            | Signature:       |                                   | <u> </u>                                  |                        | Date: c                     | 20 January dol:                                    |



TISCH ENVIRONMENTAL, INC. 145 SOUTH MIAMI AVE VILLAGE OF CLEVES, OH 45002 513.467.9000 877.263.7610 TOLL FREE 513.467.9009 FAX

## ORIFICE TRANSFER STANDARD CERTIFICATION WORKSHEET TE-5025A

|                       |                         | Rootsmeter<br>Orifice I.I |                                      | 438320<br>2896                                 | Ta (K) -<br>Pa (mm) -            | 295<br>· 755.65                      |
|-----------------------|-------------------------|---------------------------|--------------------------------------|------------------------------------------------|----------------------------------|--------------------------------------|
| PLATE<br>OR<br>Run #  | VOLUME<br>START<br>(m3) | VOLUME<br>STOP<br>(m3)    | DIFF<br>VOLUME<br>(m3)               | DIFF<br>TIME<br>(min)                          | METER DIFF Hg (mm)               | ORFICE DIFF H20 (in.)                |
| 1<br>2<br>3<br>4<br>5 | NA<br>NA<br>NA<br>NA    | NA<br>NA<br>NA<br>NA      | 1.00<br>1.00<br>1.00<br>1.00<br>1.00 | 1.4340<br>1.0250<br>0.9150<br>0.8770<br>0.7210 | 3.2<br>6.4<br>7.9<br>8.7<br>12.7 | 2.00<br>4.00<br>5.00<br>5.50<br>8.00 |

#### DATA TABULATION

| Vstd                                           | (x axis)<br>Qstd                               | (y axis)                                       |      | Va                                             | (x axis)<br>Qa                                 | (y axis)                                       |
|------------------------------------------------|------------------------------------------------|------------------------------------------------|------|------------------------------------------------|------------------------------------------------|------------------------------------------------|
| 1.0001<br>0.9959<br>0.9938<br>0.9928<br>0.9875 | 0.6974<br>0.9716<br>1.0861<br>1.1320<br>1.3696 | 1.4173<br>2.0044<br>2.2410<br>2.3503<br>2.8346 |      | 0.9957<br>0.9915<br>0.9894<br>0.9885<br>0.9831 | 0.6944<br>0.9674<br>1.0814<br>1.1271<br>1.3636 | 0.8836<br>1.2496<br>1.3971<br>1.4653<br>1.7672 |
| Qstd slop                                      | (b) = 0                                        | 2.11176<br>-0.05079<br>0.99982                 |      | Qa slope<br>intercept<br>coefficie             | (b) =                                          | 1.32235<br>-0.03166<br>0.99982                 |
| y = SQRT[H20(Pa/760)(298/Ta)]                  |                                                |                                                | [a)] | y axis =                                       | SQRT [H2O (T                                   | 'a/Pa)]                                        |

#### CALCULATIONS

Vstd = Diff. Vol[(Pa-Diff. Hg)/760](298/Ta)
Qstd = Vstd/Time

Va = Diff Vol [(Pa-Diff Hg)/Pa] Qa = Va/Time

For subsequent flow rate calculations:

Qstd =  $1/m\{[SQRT(H2O(Pa/760)(298/Ta))] - b\}$ Qa =  $1/m\{[SQRT H2O(Ta/Pa)] - b\}$ 



WELLAB LIMITED

Rms 1516, 1701 & 1716, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong. Tel: 2898 7388 Fax: 2898 7076

Website: www.wellab.com.hk

#### TEST REPORT

APPLICANT: Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Test Report No.: C/160820

Date of Issue: 2016-08-20

Date Received: 2016-08-20 Date Tested: 2016-08-20

Date Completed: 2016-08-20

Next Due Date: 2017-02-19

ATTN:

Miss Mei Ling Tang

Page:

1 of 2

## **Certificate of Calibration**

#### Item for calibration:

Description

: Weather Monitor II

Manufacturer

: Davis Instruments

Model No.

: 7440

Serial No.

: MC01010A44

#### Test conditions:

Room Temperature

: 24 degree Celsius

Relative Humidity

: 56 %

## **Test Specifications:**

- 1. Performance check of anemometer
- 2. Performance check of wind direction sensor

#### Methodology:

In-house method with reference anemometer (RS232 Integral Vane Digital Anemometer)

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE



## **TEST REPORT**

Test Report No.: C/160820

Date of Issue: 2016-08-20

Date Received: 2016-08-20

Date Tested: 2016-08-20

Date Completed: 2016-08-20

Next Due Date: 2017-02-19

Page:

2 of 2

## **Results:**

#### 1. Performance check of anemometer

| Air Velo                | Difference D (m/s)   |             |
|-------------------------|----------------------|-------------|
| Instrument Reading (V1) | Reference Value (V1) | D = V1 - V2 |
| 2.00                    | 2.00                 | 0.00        |

## 2. Performance check of wind direction sensor

| Wind Dire               | ection (°)           | Difference D (°) |
|-------------------------|----------------------|------------------|
| Instrument Reading (W1) | Reference Value (W2) | D = W1 - W2      |
| 0                       | 0                    | 0                |
| 45.2                    | 45                   | 0.2              |
| 90.1                    | 90                   | 0.1              |
| 134.8                   | 135                  | -0.2             |
| 180.3                   | 180                  | 0.3              |
| 225.1                   | 225                  | 0.1              |
| 270.2                   | 270                  | 0.2              |
| 315.1                   | 315                  | 0.1              |
| 360                     | 360                  | 0                |



WELLAB LIMITED

Rms 1516, 1701 & 1716, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong. Tel: 2898 7388 Fax: 2898 7076 Website: www.wellab.com.hk

## TEST REPORT

APPLICANT: Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

 Test Report No.:
 C/A/170106A

 Date of Issue:
 2017-01-09

 Date Received:
 2017-01-06

 Date Tested:
 2017-01-06

 Date Completed:
 2017-01-09

Page:

Next Due Date:

1 of 1

2017-03-08

ATTN:

Mr. W. K. Tang

## **Certificate of Calibration**

#### Item for Calibration:

Description

: Laser Dust Monitor

Manufacturer

: Sibata

Model No.

: LD-3

Serial No.

: 251634

Sensitivity (K) 1 CPM

 $: 0.001 \text{ mg/m}^3$ 

Sen. Adjustment Scale Setting

: 550 CPM

Equipment No.

: A-02-01

#### **Test Conditions:**

Room Temperature

: 22 degree Celsius

Relative Humidity

: 63 %

#### Test Specifications & Methodology:

- 1. Instruction and Operation Manual High Volume Sampler, Andersen Samplers, Inc.
- 2. In-house method in according to the instruction manual: The Laser Dust Monitor was compared with a calibrated High Volume Sampler and the result was used to generate the Correlation Factor (CF) between the Laser Dust Monitor and High Volume Sampler.

#### **Results:**

Correlation Factor (CF)

0.0037

\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE



WELLAB LIMITED

Rms 1516, 1701 & 1716, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong. Tel: 2898 7388 Fax: 2898 7076

Website: www.wellab.com.hk

## TEST REPORT

**Cinotech Consultants Limited** APPLICANT:

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Test Report No.: C/A/161104A Date of Issue: 2016-11-07 Date Received: 2016-11-04 Date Tested: 2016-11-04 Date Completed: 2016-11-07 Next Due Date: 2017-01-06

ATTN:

Mr. W. K. Tang

Page:

1 of 1

## Certificate of Calibration

#### Item for Calibration:

Description : Laser Dust Monitor

Manufacturer : Sibata Model No. : LD-3B : 853944 Serial No. Sensitivity (K) 1 CPM  $: 0.001 \text{ mg/m}^3$ : 685 CPM Sen. Adjustment Scale Setting Equipment No. : A-02-04

**Test Conditions:** 

: 22 degree Celsius Room Temperature

Relative Humidity : 61 %

#### Test Specifications & Methodology:

- 1. Instruction and Operation Manual High Volume Sampler, Andersen Samplers, Inc.
- 2. In-house method in according to the instruction manual: The Laser Dust Monitor was compared with a calibrated High Volume Sampler and the result was used to generate the Correlation Factor (CF) between the Laser Dust Monitor and High Volume Sampler.

#### Results:

|                          | <b>,</b>    |
|--------------------------|-------------|
| Completion Footon (CE)   | 0.0024      |
| Correlation Factor (CF)  | 1 11/1/1/14 |
| Correlation & detax (Cx) | 0.0051      |
|                          |             |

\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.



WELLAB LIMITED Rms 1516, 1701 & 1716, Technology Park,

18 On Lai Street, Shatin, N.T., Hong Kong. Tel: 2898 7388 Fax: 2898 7076

Website: www.wellab.com.hk

#### TEST REPORT

APPLICANT: Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Test Report No.: C/A/170106B

Date of Issue: 2017-01-09

Date Received: 2017-01-06

Date Received: 2017-01-06

Date Tested: 2017-01-06

Date Completed: 2017-01-09 Next Due Date: 2017-03-08

ATTN:

Mr. W. K. Tang

Page:

1 of 1

## **Certificate of Calibration**

#### Item for Calibration:

Description

: Laser Dust Monitor

Manufacturer

: Sibata

Model No.

: LD-3B

Serial No.

: 853944

Sensitivity (K) 1 CPM

: 0.001 mg/m<sup>3</sup>

Sen. Adjustment Scale Setting

: 685 CPM

Equipment No.

: A-02-04

**Test Conditions:** 

Room Temperature

: 22 degree Celsius

Relative Humidity

: 63 %

## Test Specifications & Methodology:

- 1. Instruction and Operation Manual High Volume Sampler, Andersen Samplers, Inc.
- 2. In-house method in according to the instruction manual: The Laser Dust Monitor was compared with a calibrated High Volume Sampler and the result was used to generate the Correlation Factor (CF) between the Laser Dust Monitor and High Volume Sampler.

#### Results:

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE



WELLAB LIMITED

Rms 1516, 1701 & 1716, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong. Tel: 2898 7388 Fax: 2898 7076 Website: www.wellab.com.hk

#### TEST REPORT

**Cinotech Consultants Limited** APPLICANT:

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

C/A/170106C Test Report No.: Date of Issue: 2017-01-09 2017-01-06 Date Received: Date Tested: 2017-01-06

Date Completed: Next Due Date:

2017-01-09 2017-03-08

Page:

1 of 1

ATTN:

Mr. W. K. Tang

## **Certificate of Calibration**

Item for Calibration:

: Laser Dust Monitor Description

: Sibata Manufacturer : LD-3B Model No. : 014750 Serial No.

 $: 0.001 \text{ mg/m}^3$ Sensitivity (K) 1 CPM : 790 CPM Sen. Adjustment Scale Setting : A-02-06 Equipment No.

**Test Conditions:** 

: 22 degree Celsius Room Temperature

: 63 % Relative Humidity

## Test Specifications & Methodology:

- 1. Instruction and Operation Manual High Volume Sampler, Andersen Samplers, Inc.
- 2. In-house method in according to the instruction manual: The Laser Dust Monitor was compared with a calibrated High Volume Sampler and the result was used to generate the Correlation Factor (CF) between the Laser Dust Monitor and High Volume Sampler.

#### Results:

0.0035 Correlation Factor (CF)

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*

PATRICK TSE



WELLAB LIMITED

Rms 1516, 1701 & 1716, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong. Tel: 2898 7388 Fax: 2898 7076 Website: www.wellab.com.hk

#### TEST REPORT

APPLICANT:

**Cinotech Consultants Limited** 

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Test Report No.: Date of Issue:

C/A/161104C 2016-11-07

Date Received: Date Tested:

2016-11-04 2016-11-04

Date Completed:

2016-11-07

Next Due Date:

2017-01-06

Page:

1 of 1

ATTN:

Mr. W. K. Tang

#### **Certificate of Calibration**

#### Item for Calibration:

Description

: Laser Dust Monitor

Manufacturer

: Sibata

Model No.

: LD-3B

: 541146

Serial No.

 $: 0.001 \text{ mg/m}^3$ 

Sensitivity (K) 1 CPM Sen. Adjustment Scale Setting

: 625 CPM

Equipment No.

: A-02-07

**Test Conditions:** 

Room Temperature

: 22 degree Celsius

Relative Humidity

: 61 %

## Test Specifications & Methodology:

- 1. Instruction and Operation Manual High Volume Sampler, Andersen Samplers, Inc.
- 2. In-house method in according to the instruction manual: The Laser Dust Monitor was compared with a calibrated High Volume Sampler and the result was used to generate the Correlation Factor (CF) between the Laser Dust Monitor and High Volume Sampler.


#### Results:

0.0031 Correlation Factor (CF)

\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.





#### TEST REPORT

APPLICANT: Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Test Report No.: C/A/170106
Date of Issue: 2017-01-09
Date Received: 2017-01-06
Date Tested: 2017-01-06
Date Completed: 2017-01-09
Next Due Date: 2017-03-08

ATTN:

Mr. W. K. Tang

Page:

1 of 1

## **Certificate of Calibration**

#### Item for Calibration:

Description : Laser Dust Monitor

Manufacturer : Sibata

Model No. : LD-3B

Serial No. : 541146

Sensitivity (K) 1 CPM : 0.001 mg/m³

Sen. Adjustment Scale Setting : 625 CPM

Equipment No. : A-02-07

**Test Conditions:** 

Room Temperature : 22 degree Celsius

Relative Humidity : 63 %

#### Test Specifications & Methodology:

- 1. Instruction and Operation Manual High Volume Sampler, Andersen Samplers, Inc.
- 2. In-house method in according to the instruction manual: The Laser Dust Monitor was compared with a calibrated High Volume Sampler and the result was used to generate the Correlation Factor (CF) between the Laser Dust Monitor and High Volume Sampler.

#### Results:

|  | Correlation Factor (CF) |  | 0.0033 |
|--|-------------------------|--|--------|
|--|-------------------------|--|--------|

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE



WELLAB LIMITED

Rms 1516, 1701 & 1716, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong. Tel: 2898 7388 Fax: 2898 7076 Website: www.wellab.com.hk

#### TEST REPORT

APPLICANT: Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Test Report No.: C/161230
Date of Issue: 2017-01-03
Date Received: 2016-12-30
Date Tested: 2016-12-30
Date Completed: 2017-01-03
Next Due Date: 2017-03-02

ATTN:

Mr. W. K. Tang

Page:

1 of 1

## **Certificate of Calibration**

#### Item for Calibration:

Description

: Laser Dust Monitor

Manufacturer

: Sibata

Model No.

: LD-3B

Serial No.

: 095029

Sensitivity (K) 1 CPM

: 0.001 mg/m<sup>3</sup>

Sen. Adjustment Scale Setting

: 551 CPM

Equipment No.

: A-02-10

#### **Test Conditions:**

Room Temperature

: 22 degree Celsius

Relative Humidity

: 66 %

#### Test Specifications & Methodology:

- 1. Instruction and Operation Manual High Volume Sampler, Andersen Samplers, Inc.
- 2. In-house method in according to the instruction manual: The Laser Dust Monitor was compared with a calibrated High Volume Sampler and the result was used to generate the Correlation Factor (CF) between the Laser Dust Monitor and High Volume Sampler.


#### Results:

Correlation Factor (CF) 0.0038

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE





#### TEST REPORT

APPLICANT: Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Test Report No.: C/161230D
Date of Issue: 2017-01-03
Date Received: 2016-12-30
Date Tested: 2016-12-30

Date Completed: 2017-01-03

Next Due Date: 2017-03-02

ATTN:

Mr. W. K. Tang

Page:

1 of 1

## **Certificate of Calibration**

#### Item for Calibration:

Description

: Dust Monitor

Manufacturer

: Met One Instruments

Model No.

: AEROCET-531

Serial No.

: N6734

Flow rate

:0.1 cfm

Zero Count Test

:0 mg (The result of the 2-minute sample)

Equipment No.

: A-02-13

#### **Test Conditions:**

Room Temperature

: 22 degree Celsius

Relative Humidity

: 66 %

#### Test Specifications & Methodology:

- 1. Instruction and Operation Manual High Volume Sampler, Andersen Samplers, Inc.
- 2. In-house method in according to the instruction manual: The Dust Monitor was compared with a calibrated High Volume Sampler and the result was used to generate the Correlation Factor (CF) between the Dust Monitor and High Volume Sampler.

#### Results:


| Correlation Factor (CF) | 1.183 |
|-------------------------|-------|
|                         |       |

\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE





## TEST REPORT

APPLICANT: Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Test Report No.: C/N/160917B Date of Issue: 2016-09-19 Date Received: 2016-09-17 Date Tested: 2016-09-17 2016-09-19 Date Completed:

Page:

Next Due Date:

1 of 1

2017-09-18

ATTN:

Mr. W.K. Tang

## **Certificate of Calibration**

#### Item for calibration:

Description

: 'SVANTEK' Integrating Sound Level Meter

Manufacturer

: SVANTEK

Model No.

: SVAN 955 : 12553

Serial No. Microphone No.

: 35222

Equipment No.

: N-08-02

#### **Test conditions:**

Room Temperatre

: 24 degree Celsius

Relative Humidity

: 57%

## **Test Specifications:**

Performance checking at 94 and 114 dB

#### Methodology:

In-house method, according to manufacturer instruction manual

#### Results:

| Reference Set Point, dB | Instrument Readings, dB |
|-------------------------|-------------------------|
| 94                      | 94.0                    |
| 114                     | 114.0                   |

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE





#### TEST REPORT

APPLICANT: Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Test Report No.: C/N/160917C
Date of Issue: 2016-09-19
Date Received: 2016-09-17
Date Tested: 2016-09-17
Date Completed: 2016-09-19
Next Due Date: 2017-09-18

ATTN:

Mr. W.K. Tang

Page:

1 of 1

## **Certificate of Calibration**

#### Item for calibration:

Description : 'SVANTEK' Integrating Sound Level Meter

Manufacturer : SVANTEK
Model No. : SVAN 955
Serial No. : 12563
Microphone No. : 34377
Equipment No. : N-08-03

**Test conditions:** 

Room Temperatre : 24 degree Celsius

Relative Humidity : 57%

#### **Test Specifications:**

Performance checking at 94 and 114 dB

## Methodology:

In-house method, according to manufacturer instruction manual

#### Results:

| Reference Set Point, dB | Instrument Readings, dB |
|-------------------------|-------------------------|
| 94                      | 94.0                    |
| 114                     | 114.0                   |

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE
Laboratory Manager

Lacoratory manager



WELLAB LIMITED
Rms 816, 1516 & 1701, Technology Park,
18 On Lai Street, Shatin, N.T. Hong Kong.

Tel: 2898 7388 Fax: 2898 7076 Website: www.wellab.com.hk

## TEST REPORT

APPLICANT: Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Test Report No.: C/N/160826A
Date of Issue: 2016-08-29
Date Received: 2016-08-26

Date Tested: 2016-08-26 Date Completed: 2016-08-29

Next Due Date: 2017-08-28

ATTN:

Mr. W.K. Tang

Page:

1 of 1

## **Certificate of Calibration**

#### Item for calibration:

Description

: 'SVANTEK' Integrating Sound Level Meter

Manufacturer

: SVANTEK

Model No.

: SVAN 957

Serial No.

: 21455

Microphone No.

: 43730

Equipment No.

: N-08-07

#### **Test conditions:**

Room Temperatre

: 25 degree Celsius

Relative Humidity

: 57%

#### **Test Specifications:**

Performance checking at 94 and 114 dB

#### Methodology:

In-house method, according to manufacturer instruction manual


#### Results:

| Reference Set Point, dB | Instrument Readings, dB |
|-------------------------|-------------------------|
| 94                      | 94.0                    |
| 114                     | 114.0                   |

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE
Laboratory Manager





#### TEST REPORT

APPLICANT:

**Cinotech Consultants Limited** 

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

| Test Report No.: | C/N/160819B |
|------------------|-------------|
| Date of Issue:   | 2016-08-22  |
| Date Received:   | 2016-08-19  |
| Date Tested:     | 2016-08-19  |
| Date Completed:  | 2016-08-22  |
| Next Due Date:   | 2017-08-21  |

ATTN:

Mr. W.K. Tang

Page:

1 of 1

## **Certificate of Calibration**

#### Item for calibration:

Description

: 'SVANTEK' Integrating Sound Level Meter

Manufacturer

: SVANTEK

Model No. Serial No. : SVAN 957 : 21459

Microphone No.

: 43676

Equipment No.

: N-08-08

#### Test conditions:

Room Temperatre

: 24 degree Celsius

Relative Humidity

: 58%

#### **Test Specifications:**

Performance checking at 94 and 114 dB

## Methodology:

In-house method, according to manufacturer instruction manual

#### Results:

| Reference Set Point, dB | Instrument Readings, dB |
|-------------------------|-------------------------|
| 94                      | 94.0                    |
| 114                     | 114.0                   |

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE





## TEST REPORT

APPLICANT:

**Cinotech Consultants Limited** 

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Test Report No.: C/N/160819C Date of Issue: 2016-08-22 Date Received: 2016-08-19 Date Tested: 2016-08-19 Date Completed: 2016-08-22 Next Due Date: 2017-08-21

ATTN:

Mr. W.K. Tang

Page:

1 of 1

## **Certificate of Calibration**

#### Item for calibration:

Description

: 'SVANTEK' Integrating Sound Level Meter

Manufacturer Model No.

: SVANTEK : SVAN 957

Serial No. Microphone No.

: 21460 : 43679

Equipment No.

: N-08-09

#### **Test conditions:**

Room Temperatre

: 24 degree Celsius

Relative Humidity

: 58%

## **Test Specifications:**

Performance checking at 94 and 114 dB

#### Methodology:

In-house method, according to manufacturer instruction manual

#### Results:

| Reference Set Point, dB | Instrument Readings, dB |
|-------------------------|-------------------------|
| 94                      | 94.0                    |
| 114                     | 114.0                   |

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.



## TEST REPORT

**Cinotech Consultants Limited** APPLICANT:

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

Test Report No.: C/N/161128 Date of Issue: 2016-11-30 Date Received: 2016-11-28 Date Tested: 2016-11-28 Date Completed: 2016-11-30

Next Due Date:

2017-11-29

ATTN:

Mr. W.K. Tang

Page:

1 of 1

## **Certificate of Calibration**

#### Item for calibration:

Description

: 'SVANTEK' Integrating Sound Level Meter

Manufacturer : SVANTEK Model No. : SVAN 957 Serial No. : 23853 Microphone No. : 48530

Equipment No.

: N-08-10

#### **Test conditions:**

Room Temperatre

: 21 degree Celsius

Relative Humidity

: 66%

#### **Test Specifications:**

Performance checking at 94 and 114 dB

## Methodology:

In-house method, according to manufacturer instruction manual


#### Results:

| Reference Set Point, dB | Instrument Readings, dB |  |
|-------------------------|-------------------------|--|
| 94                      | 94.0                    |  |
| 114                     | 114.0                   |  |

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE Laboratory Manager





## TEST REPORT

APPLICANT: Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

| C/N/160930A |
|-------------|
| 2016-10-03  |
| 2016-09-30  |
| 2016-09-30  |
| 2016-10-03  |
| 2017-10-02  |
|             |

ATTN:

Mr. W.K. Tang

Page:

1 of 1

#### Item for calibration:

Description

: Acoustical Calibrator

Manufacturer Model No. : SVANTEK : SV30A

Serial No. Equipment No.

: 24803 : N-09-03

#### Test conditions:

Room Temperatre

: 25 degree Celsius

Relative Humidity

: 60%

#### Methodology:

The Sound Level Calibrator has been calibrated in accordance with the documented procedures and using standard(s) and instrument(s) which are recommended by the manufacturer, or equivalent.

#### **Results:**

| Sound Pressure Level (1kHz) | Measured SPL | Tolerance      |
|-----------------------------|--------------|----------------|
| At 94 dB SPL                | 94.0         | 94.0 ± 0.1 dB  |
| At 114 dB SPL               | 114.0        | 114.0 ± 0.1 dB |

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE





Rms 1516, 1701 & 1716, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong. Tel: 2898 7388 Fax: 2898 7076 Website: www.wellab.com.hk

### TEST REPORT

APPLICANT:

**Cinotech Consultants Limited** 

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

| Test Report No.: | C/N/160930B |
|------------------|-------------|
| Date of Issue:   | 2016-10-03  |
| Date Received:   | 2016-09-30  |
| Date Tested:     | 2016-09-30  |
| Date Completed:  | 2016-10-03  |
| Next Due Date:   | 2017-10-02  |

ATTN:

Mr. W.K. Tang

Page:

1 of 1

#### Item for calibration:

Description

: Acoustical Calibrator

Manufacturer

: SVANTEK : SV30A

Model No. Serial No.

: 24791

Equipment No.

: N-09-04

### Test conditions:

Room Temperatre

: 25 degree Celsius

Relative Humidity

:60%

### Methodology:

The Sound Level Calibrator has been calibrated in accordance with the documented procedures and using standard(s) and instrument(s) which are recommended by the manufacturer, or equivalent.

#### **Results:**

| Sound Pressure Level (1kHz) | Measured SPL | Tolerance      |
|-----------------------------|--------------|----------------|
| At 94 dB SPL                | 94.0         | 94.0 ± 0.1 dB  |
| At 114 dB SPL               | 114.0        | 114.0 ± 0.1 dB |

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

RATRICK TSE

Laboratory Manager



WELLAB LIMITED Rms 1516, 1701 & 1716, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong. Tel: 2898 7388 Fax: 2898 7076

Website: www.wellab.com.hk

### TEST REPORT

APPLICANT:

Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

| -                |             |
|------------------|-------------|
| Test Report No.: | C/N/160930C |
| Date of Issue:   | 2016-10-03  |
| Date Received:   | 2016-09-30  |
| Date Tested:     | 2016-09-30  |
| Date Completed:  | 2016-10-03  |
| Next Due Date:   | 2017-10-02  |

ATTN:

Mr. W.K. Tang

Page:

1 of 1

#### Item for calibration:

Description

: Acoustical Calibrator

Manufacturer

: SVANTEK

Model No.

: SV30A

Serial No.

: 24780

Equipment No.

: N-09-05

### Test conditions:

Room Temperatre

: 25 degree Celsius

Relative Humidity

: 60%

### Methodology:

The Sound Level Calibrator has been calibrated in accordance with the documented procedures and using standard(s) and instrument(s) which are recommended by the manufacturer, or equivalent.

#### **Results:**

| Sound Pressure Level (1kHz) | Measured SPL | Tolerance      |
|-----------------------------|--------------|----------------|
| At 94 dB SPL                | 94.0         | 94.0 ± 0.1 dB  |
| At 114 dB SPL               | 114.0        | 114.0 ± 0.1 dB |

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE

Laboratory Manager



WELLAB LIMITED
Rus 816, 1516 & 1701, Technology Park,
18 On Lai Street, Shatin, N.T. Hong Kong,
Tel: 2898 7388 Fax: 2898 7076
Website: www.wellab.com.hk

### TEST REPORT

APPLICANT:

Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

| Test Report No.: | C/N/161104/1 |
|------------------|--------------|
| Date of Issue:   | 2016-11-07   |
| Date Received:   | 2016-11-04   |
| Date Tested:     | 2016-11-04   |
| Date Completed:  | 2016-11-07   |
| Next Due Date:   | 2017-11-06   |

ATTN:

Mr. W.K. Tang

Page:

1 of 1

### Item for calibration:

Description

: Acoustical Calibrator

Manufacturer

: Brüel & Kjær

Model No.

: 4231

Serial No.

: 2326353

Equipment No.

: N-02-01

#### Test conditions:

Room Temperatre

: 21 degree Celsius

Relative Humidity

: 62 %

### Methodology:

The sound calibrator has been calibrated in accordance with the documented procedures and using standard(s) and instrument(s) which are recommended by the manufacturer, or equivalent.

#### Results:

| Sound Pressure Level (1kHz) | Measured SPL | Tolerance      |
|-----------------------------|--------------|----------------|
| At 94 dB SPL                | 94.0         | 94.0 ± 0.1 dB  |
| At 114 dB SPL               | 114.0        | 114.0 ± 0.1 dB |

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE Laboratory Manager

This report may not be reproduced except with prior written approval from WELLAB LIMITED and the results relate only to the items calibrated or tested.



WELLAB LIMITED

Rms 1516, 1701 & 1716, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong. Tel: 2898 7388 Fax: 2898 7076 Website: www.wellab.com.hk

### TEST REPORT

APPLICANT:

Cinotech Consultants Limited

Room 1710, Technology Park,

18 On Lai Street,

Shatin, NT, Hong Kong

 Test Report No.:
 C/N/160819D

 Date of Issue:
 2016-08-22

 Date Received:
 2016-08-19

 Date Tested:
 2016-08-19

 Date Completed:
 2016-08-22

Page:

Next Due Date:

1 of 1

2017-08-21

ATTN:

Mr. W.K. Tang

### **Certificate of Calibration**

#### Item for calibration:

Description

: Acoustical Calibrator

Manufacturer

: Brüel & Kjær

Model No.

: 4231

Serial No.

: 2412367

Equipment No.

: N-02-03

#### Test conditions:

Room Temperatre

: 24 degree Celsius

Relative Humidity

: 58%

### Methodology:

The Sound Level Calibrator has been calibrated in accordance with the documented procedures and using standard(s) and instrument(s) which are recommended by the manufacturer, or equivalent.

#### Results:

| Sound Pressure Level (1kHz) | Measured SPL | Tolerance      |
|-----------------------------|--------------|----------------|
| At 94 dB SPL                | 94.0         | 94.0 ± 0.1 dB  |
| At 114 dB SPL               | 114.0        | 114.0 ± 0.1 dB |

PREPARED AND CHECKED BY:

For and On Behalf of WELLAB Ltd.

PATRICK TSE

Laboratory Manager

### APPENDIX C WEATHER INFORMATION

### I. General Information

| Date            | Mean Air<br>Temperature (°C) | Mean Relative<br>Humidity (%) | Precipitation (mm) |
|-----------------|------------------------------|-------------------------------|--------------------|
| 16 January 2017 | 14.7 – 17.4                  | 73 – 92                       | 0.4                |
| 17 January 2017 | 16.7 – 19.2                  | 69 – 84                       | 0                  |
| 18 January 2017 | 18.0 – 20.0                  | 81 – 91                       | Trace              |
| 19 January 2017 | 18.7 – 24.1                  | 61 – 87                       | 0                  |
| 20 January 2017 | 16.2 – 20.6                  | 55 – 86                       | Trace              |
| 21 January 2017 | 14.6 – 19.0                  | 54 – 80                       | 0                  |
| 22 January 2017 | 13.6 – 19.8                  | 44 – 75                       | 0                  |
| 23 January 2017 | 15.2 – 19.4                  | 62 – 81                       | 0                  |
| 24 January 2017 | 15.7 – 18.9                  | 58 – 78                       | 0                  |
| 25 January 2017 | 15.9 – 20.9                  | 65 – 83                       | 0                  |
| 26 January 2017 | 16.2 – 19.8                  | 64 – 84                       | 0                  |
| 27 January 2017 | 14.4 – 21.3                  | 42 – 85                       | 0                  |
| 28 January 2017 | 16.4 – 18.8                  | 68 – 87                       | 0.3                |
| 29 January 2017 | 18.1 – 21.5                  | 77 – 96                       | 2.4                |
| 30 January 2017 | 17.4 – 23.4                  | 79 – 95                       | 1.2                |
| 31 January 2017 | 15.9 – 17.6                  | 83 – 95                       | 0.5                |

<sup>\*</sup> The above information was extracted from the daily weather summary by Hong Kong Observatory.

| Date        | Time  | Wind Speed m/s | Direction |
|-------------|-------|----------------|-----------|
| 16-Jan-2017 | 0:00  | 1.1            | SSE       |
| 16-Jan-2017 | 1:00  | 1.2            | E         |
| 16-Jan-2017 | 2:00  | 1              | E         |
| 16-Jan-2017 | 3:00  | 0.9            | E         |
| 16-Jan-2017 | 4:00  | 1.1            | E         |
| 16-Jan-2017 | 5:00  | 1.4            | E         |
| 16-Jan-2017 | 6:00  | 0.8            | E         |
| 16-Jan-2017 | 7:00  | 1.2            | E         |
| 16-Jan-2017 | 8:00  | 1.1            | NE        |
| 16-Jan-2017 | 9:00  | 1.8            | NE        |
| 16-Jan-2017 | 10:00 | 2              | NNE       |
| 16-Jan-2017 | 11:00 | 1.9            | NE        |
| 16-Jan-2017 | 12:00 | 2.3            | ENE       |
| 16-Jan-2017 | 13:00 | 2.5            | ENE       |
| 16-Jan-2017 | 14:00 | 2.5            | NE        |
| 16-Jan-2017 | 15:00 | 2.4            | NNE       |
| 16-Jan-2017 | 16:00 | 2.1            | NE        |
| 16-Jan-2017 | 17:00 | 2              | NE        |
| 16-Jan-2017 | 18:00 | 1.7            | NE        |
| 16-Jan-2017 | 19:00 | 1.4            | E         |
| 16-Jan-2017 | 20:00 | 1.3            | E         |
| 16-Jan-2017 | 21:00 | 1.2            | W         |
| 16-Jan-2017 | 22:00 | 1              | NE        |
| 16-Jan-2017 | 23:00 | 0.9            | NNE       |
| 17-Jan-2017 | 0:00  | 1.1            | NE        |
| 17-Jan-2017 | 1:00  | 1.3            | N         |
| 17-Jan-2017 | 2:00  | 1              | N         |
| 17-Jan-2017 | 3:00  | 1.3            | ENE       |
| 17-Jan-2017 | 4:00  | 1.1            | N         |
| 17-Jan-2017 | 5:00  | 1.3            | NNE       |
| 17-Jan-2017 | 6:00  | 1.3            | N         |
| 17-Jan-2017 | 7:00  | 1.3            | N         |
| 17-Jan-2017 | 8:00  | 2.1            | N         |
| 17-Jan-2017 | 9:00  | 1.8            | NE        |
| 17-Jan-2017 | 10:00 | 1.9            | NNE       |
| 17-Jan-2017 | 11:00 | 2.6            | NNE       |

| 17-Jan-2017 | 12:00 | 2.5 | NE  |
|-------------|-------|-----|-----|
| 17-Jan-2017 | 13:00 | 2.7 | NE  |
| 17-Jan-2017 | 14:00 | 2.6 | NNE |
| 17-Jan-2017 | 15:00 | 3   | NNE |
| 17-Jan-2017 | 16:00 | 2.8 | NNE |
| 17-Jan-2017 | 17:00 | 2.2 | ENE |
| 17-Jan-2017 | 18:00 | 1.6 | ENE |
| 17-Jan-2017 | 19:00 | 1.6 | ENE |
| 17-Jan-2017 | 20:00 | 1.9 | ENE |
| 17-Jan-2017 | 21:00 | 2   | ENE |
| 17-Jan-2017 | 22:00 | 1.8 | ENE |
| 17-Jan-2017 | 23:00 | 1.3 | ENE |
| 18-Jan-2017 | 0:00  | 1   | Е   |
| 18-Jan-2017 | 1:00  | 1.4 | NE  |
| 18-Jan-2017 | 2:00  | 0.7 | W   |
| 18-Jan-2017 | 3:00  | 0.9 | NE  |
| 18-Jan-2017 | 4:00  | 0.9 | ENE |
| 18-Jan-2017 | 5:00  | 1.1 | ENE |
| 18-Jan-2017 | 6:00  | 0.7 | NE  |
| 18-Jan-2017 | 7:00  | 0.8 | ENE |
| 18-Jan-2017 | 8:00  | 1.2 | NE  |
| 18-Jan-2017 | 9:00  | 1.6 | NE  |
| 18-Jan-2017 | 10:00 | 2.2 | NE  |
| 18-Jan-2017 | 11:00 | 2.1 | NE  |
| 18-Jan-2017 | 12:00 | 2.5 | NE  |
| 18-Jan-2017 | 13:00 | 2   | NE  |
| 18-Jan-2017 | 14:00 | 2   | NNE |
| 18-Jan-2017 | 15:00 | 2.2 | N   |
| 18-Jan-2017 | 16:00 | 2.2 | N   |
| 18-Jan-2017 | 17:00 | 2   | N   |
| 18-Jan-2017 | 18:00 | 1.9 | Е   |
| 18-Jan-2017 | 19:00 | 1.5 | Е   |
| 18-Jan-2017 | 20:00 | 2.3 | ENE |
| 18-Jan-2017 | 21:00 | 2.3 | ENE |
| 18-Jan-2017 | 22:00 | 1.7 | ENE |
| 18-Jan-2017 | 23:00 | 2.2 | ENE |
| 19-Jan-2017 | 0:00  | 2.4 | ESE |

| 19-Jan-2017 | 1:00  | 2   | NNW |
|-------------|-------|-----|-----|
| 19-Jan-2017 | 2:00  | 2.7 | ENE |
| 19-Jan-2017 | 3:00  | 2.2 | N   |
| 19-Jan-2017 | 4:00  | 1.9 | W   |
| 19-Jan-2017 | 5:00  | 2.2 | W   |
| 19-Jan-2017 | 6:00  | 2.1 | W   |
| 19-Jan-2017 | 7:00  | 1.9 | WSW |
| 19-Jan-2017 | 8:00  | 2.3 | S   |
| 19-Jan-2017 | 9:00  | 2.3 | S   |
| 19-Jan-2017 | 10:00 | 2.6 | WNW |
| 19-Jan-2017 | 11:00 | 2.7 | N   |
| 19-Jan-2017 | 12:00 | 2.9 | N   |
| 19-Jan-2017 | 13:00 | 1.9 | NW  |
| 19-Jan-2017 | 14:00 | 2.4 | NW  |
| 19-Jan-2017 | 15:00 | 2   | WNW |
| 19-Jan-2017 | 16:00 | 2.5 | WNW |
| 19-Jan-2017 | 17:00 | 2.4 | E   |
| 19-Jan-2017 | 18:00 | 2   | ESE |
| 19-Jan-2017 | 19:00 | 1.6 | NNE |
| 19-Jan-2017 | 20:00 | 1.5 | N   |
| 19-Jan-2017 | 21:00 | 0.9 | N   |
| 19-Jan-2017 | 22:00 | 1.1 | NW  |
| 19-Jan-2017 | 23:00 | 1.4 | W   |
| 20-Jan-2017 | 0:00  | 1.3 | NNE |
| 20-Jan-2017 | 1:00  | 1   | Е   |
| 20-Jan-2017 | 2:00  | 1.3 | ENE |
| 20-Jan-2017 | 3:00  | 0.9 | ENE |
| 20-Jan-2017 | 4:00  | 1   | WNW |
| 20-Jan-2017 | 5:00  | 0.9 | WNW |
| 20-Jan-2017 | 6:00  | 0.9 | WNW |
| 20-Jan-2017 | 7:00  | 0.9 | WNW |
| 20-Jan-2017 | 8:00  | 1.1 | WNW |
| 20-Jan-2017 | 9:00  | 1.6 | WNW |
| 20-Jan-2017 | 10:00 | 2.2 | SW  |
| 20-Jan-2017 | 11:00 | 2.3 | WNW |
| 20-Jan-2017 | 12:00 | 2.3 | WSW |
| 20-Jan-2017 | 13:00 | 2   | SW  |
|             |       |     |     |

| 20-Jan-2017 | 14:00 | 2.4 | w   |
|-------------|-------|-----|-----|
| 20-Jan-2017 | 15:00 | 2.4 | W   |
| 20-Jan-2017 | 16:00 | 2.2 | WNW |
| 20-Jan-2017 | 17:00 | 2.1 | SW  |
| 20-Jan-2017 | 18:00 | 1.9 | SW  |
| 20-Jan-2017 | 19:00 | 1.6 | WNW |
| 20-Jan-2017 | 20:00 | 0.9 | W   |
| 20-Jan-2017 | 21:00 | 1   | W   |
| 20-Jan-2017 | 22:00 | 0.9 | WNW |
| 20-Jan-2017 | 23:00 | 1.1 | W   |
| 21-Jan-2017 | 0:00  | 1.1 | W   |
| 21-Jan-2017 | 1:00  | 1.1 | WNW |
| 21-Jan-2017 | 2:00  | 1   | SSW |
| 21-Jan-2017 | 3:00  | 1.2 | WNW |
| 21-Jan-2017 | 4:00  | 1.2 | WNW |
| 21-Jan-2017 | 5:00  | 1   | WNW |
| 21-Jan-2017 | 6:00  | 1.2 | NNE |
| 21-Jan-2017 | 7:00  | 1.3 | NNE |
| 21-Jan-2017 | 8:00  | 1.3 | SSW |
| 21-Jan-2017 | 9:00  | 1.8 | SW  |
| 21-Jan-2017 | 10:00 | 2   | W   |
| 21-Jan-2017 | 11:00 | 2.2 | NNE |
| 21-Jan-2017 | 12:00 | 2.3 | SE  |
| 21-Jan-2017 | 13:00 | 2.5 | ENE |
| 21-Jan-2017 | 14:00 | 2.7 | NE  |
| 21-Jan-2017 | 15:00 | 2.9 | ENE |
| 21-Jan-2017 | 16:00 | 2.7 | NE  |
| 21-Jan-2017 | 17:00 | 2.6 | N   |
| 21-Jan-2017 | 18:00 | 2.4 | NNE |
| 21-Jan-2017 | 19:00 | 2.1 | NE  |
| 21-Jan-2017 | 20:00 | 2.4 | E   |
| 21-Jan-2017 | 21:00 | 2.3 | ENE |
| 21-Jan-2017 | 22:00 | 2.3 | ENE |
| 21-Jan-2017 | 23:00 | 2.3 | NE  |
| 22-Jan-2017 | 0:00  | 2.6 | N   |
| 22-Jan-2017 | 1:00  | 2.3 | ENE |
| 22-Jan-2017 | 2:00  | 2.2 | ENE |

| 22-Jan-2017 | 3:00  | 1.8 | ENE |
|-------------|-------|-----|-----|
| 22-Jan-2017 | 4:00  | 2.4 | N   |
| 22-Jan-2017 | 5:00  | 2.4 | SSE |
| 22-Jan-2017 | 6:00  | 1.8 | E   |
| 22-Jan-2017 | 7:00  | 1.9 | ENE |
| 22-Jan-2017 | 8:00  | 2.4 | ESE |
| 22-Jan-2017 | 9:00  | 2.4 | ENE |
| 22-Jan-2017 | 10:00 | 2.4 | ENE |
| 22-Jan-2017 | 11:00 | 2.6 | ENE |
| 22-Jan-2017 | 12:00 | 2.5 | ESE |
| 22-Jan-2017 | 13:00 | 2.5 | ESE |
| 22-Jan-2017 | 14:00 | 2.7 | ENE |
| 22-Jan-2017 | 15:00 | 2.4 | ENE |
| 22-Jan-2017 | 16:00 | 2.8 | ENE |
| 22-Jan-2017 | 17:00 | 2.2 | ENE |
| 22-Jan-2017 | 18:00 | 2   | NE  |
| 22-Jan-2017 | 19:00 | 2.6 | ENE |
| 22-Jan-2017 | 20:00 | 2.8 | NE  |
| 22-Jan-2017 | 21:00 | 3   | NE  |
| 22-Jan-2017 | 22:00 | 2.7 | NE  |
| 22-Jan-2017 | 23:00 | 2.4 | NNE |
| 23-Jan-2017 | 0:00  | 2.3 | NNE |
| 23-Jan-2017 | 1:00  | 2.3 | NE  |
| 23-Jan-2017 | 2:00  | 2.4 | NNE |
| 23-Jan-2017 | 3:00  | 1.9 | ENE |
| 23-Jan-2017 | 4:00  | 2.2 | E   |
| 23-Jan-2017 | 5:00  | 2.5 | ENE |
| 23-Jan-2017 | 6:00  | 2   | ENE |
| 23-Jan-2017 | 7:00  | 1.9 | NE  |
| 23-Jan-2017 | 8:00  | 2.3 | SSE |
| 23-Jan-2017 | 9:00  | 2.5 | NNE |
| 23-Jan-2017 | 10:00 | 3.2 | NNE |
| 23-Jan-2017 | 11:00 | 3.2 | N   |
| 23-Jan-2017 | 12:00 | 3.1 | NE  |
| 23-Jan-2017 | 13:00 | 3.4 | ENE |
| 23-Jan-2017 | 14:00 | 2.9 | ENE |
| 23-Jan-2017 | 15:00 | 2.8 | ENE |

| 23-Jan-2017         17:00         2.8         ESE           23-Jan-2017         18:00         2.5         ESE           23-Jan-2017         19:00         2.1         ESE           23-Jan-2017         20:00         2.4         ESE           23-Jan-2017         21:00         2.2         NNE           23-Jan-2017         22:00         1.7         NNE           23-Jan-2017         23:00         1.4         NE           24-Jan-2017         0:00         1.5         SE           24-Jan-2017         1:00         1.5         E           24-Jan-2017         2:00         1.2         NNE           24-Jan-2017         2:00         1.2         NNE           24-Jan-2017         3:00         1.1         NNE           24-Jan-2017         4:00         1.3         NE           24-Jan-2017         5:00         1.4         NE           24-Jan-2017         6:00         1.3         NE           24-Jan-2017         7:00         1.4         NE           24-Jan-2017         7:00         1.4         NE           24-Jan-2017         10:00         2.5         ESE           24-Jan-2 | 23-Jan-2017 | 16:00 | 2.6 | ENE |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------|-----|-----|
| 23-Jan-2017         19:00         2.1         ESE           23-Jan-2017         20:00         2.4         ESE           23-Jan-2017         21:00         2.2         NNE           23-Jan-2017         22:00         1.7         NNE           23-Jan-2017         23:00         1.4         NE           24-Jan-2017         0:00         1.5         SE           24-Jan-2017         1:00         1.5         E           24-Jan-2017         2:00         1.2         NNE           24-Jan-2017         3:00         1.1         NNE           24-Jan-2017         4:00         1.3         NE           24-Jan-2017         5:00         1.4         NE           24-Jan-2017         5:00         1.4         NE           24-Jan-2017         6:00         1.3         NE           24-Jan-2017         7:00         1.4         NE           24-Jan-2017         9:00         2.1         ESE           24-Jan-2017         10:00         2.5         ESE           24-Jan-2017         10:00         2.5         ESE           24-Jan-2017         12:00         2.4         WSW           24-Jan-2 | 23-Jan-2017 | 17:00 | 2.8 | ESE |
| 23-Jan-2017         20:00         2.4         ESE           23-Jan-2017         21:00         2.2         NNE           23-Jan-2017         22:00         1.7         NNE           23-Jan-2017         23:00         1.4         NE           24-Jan-2017         0:00         1.5         SE           24-Jan-2017         1:00         1.5         E           24-Jan-2017         2:00         1.2         NNE           24-Jan-2017         3:00         1.1         NNE           24-Jan-2017         4:00         1.3         NE           24-Jan-2017         5:00         1.4         NE           24-Jan-2017         6:00         1.3         NE           24-Jan-2017         7:00         1.4         NE           24-Jan-2017         8:00         1.8         NE           24-Jan-2017         9:00         2.1         ESE           24-Jan-2017         10:00         2.5         ESE           24-Jan-2017         10:00         2.5         ESE           24-Jan-2017         12:00         2.4         WSW           24-Jan-2017         15:00         2.6         SE           24-Jan-20 | 23-Jan-2017 | 18:00 | 2.5 | ESE |
| 23-Jan-2017         21:00         2.2         NNE           23-Jan-2017         22:00         1.7         NNE           23-Jan-2017         23:00         1.4         NE           24-Jan-2017         0:00         1.5         SE           24-Jan-2017         1:00         1.5         E           24-Jan-2017         2:00         1.2         NNE           24-Jan-2017         3:00         1.1         NNE           24-Jan-2017         4:00         1.3         NE           24-Jan-2017         5:00         1.4         NE           24-Jan-2017         5:00         1.4         NE           24-Jan-2017         5:00         1.4         NE           24-Jan-2017         6:00         1.3         NE           24-Jan-2017         7:00         1.4         NE           24-Jan-2017         9:00         2.1         ESE           24-Jan-2017         10:00         2.5         ESE           24-Jan-2017         10:00         2.5         ESE           24-Jan-2017         12:00         2.4         WSW           24-Jan-2017         15:00         2.6         SE           24-Jan-2017 | 23-Jan-2017 | 19:00 | 2.1 | ESE |
| 23-Jan-2017         22:00         1.7         NNE           23-Jan-2017         23:00         1.4         NE           24-Jan-2017         0:00         1.5         SE           24-Jan-2017         1:00         1.5         E           24-Jan-2017         2:00         1.2         NNE           24-Jan-2017         3:00         1.1         NNE           24-Jan-2017         4:00         1.3         NE           24-Jan-2017         5:00         1.4         NE           24-Jan-2017         6:00         1.3         NE           24-Jan-2017         7:00         1.4         NE           24-Jan-2017         8:00         1.8         NE           24-Jan-2017         9:00         2.1         ESE           24-Jan-2017         10:00         2.5         ESE           24-Jan-2017         10:00         2.5         ESE           24-Jan-2017         10:00         2.6         ESE           24-Jan-2017         10:00         2.5         NE           24-Jan-2017         10:00         2.5         NE           24-Jan-2017         10:00         2.5         NE           24-Jan-2017 | 23-Jan-2017 | 20:00 | 2.4 | ESE |
| 23-Jan-2017         23:00         1.4         NE           24-Jan-2017         0:00         1.5         SE           24-Jan-2017         1:00         1.5         E           24-Jan-2017         2:00         1.2         NNE           24-Jan-2017         3:00         1.1         NNE           24-Jan-2017         4:00         1.3         NE           24-Jan-2017         5:00         1.4         NE           24-Jan-2017         6:00         1.3         NE           24-Jan-2017         7:00         1.4         NE           24-Jan-2017         8:00         1.8         NE           24-Jan-2017         9:00         2.1         ESE           24-Jan-2017         10:00         2.5         ESE           24-Jan-2017         10:00         2.6         ESE           24-Jan-2017         12:00         2.4         WSW           24-Jan-2017         13:00         2.5         NE           24-Jan-2017         15:00         2.6         SE           24-Jan-2017         16:00         2.4         ESE           24-Jan-2017         16:00         2.4         ESE           24-Jan-201 | 23-Jan-2017 | 21:00 | 2.2 | NNE |
| 24-Jan-2017         0:00         1.5         SE           24-Jan-2017         1:00         1.5         E           24-Jan-2017         2:00         1.2         NNE           24-Jan-2017         3:00         1.1         NNE           24-Jan-2017         4:00         1.3         NE           24-Jan-2017         5:00         1.4         NE           24-Jan-2017         6:00         1.3         NE           24-Jan-2017         7:00         1.4         NE           24-Jan-2017         8:00         1.8         NE           24-Jan-2017         9:00         2.1         ESE           24-Jan-2017         10:00         2.5         ESE           24-Jan-2017         11:00         2.6         ESE           24-Jan-2017         12:00         2.4         WSW           24-Jan-2017         13:00         2.5         NE           24-Jan-2017         14:00         2.9         S           24-Jan-2017         15:00         2.6         SE           24-Jan-2017         16:00         2.4         ESE           24-Jan-2017         18:00         1.8         ENE           24-Jan-2017 | 23-Jan-2017 | 22:00 | 1.7 | NNE |
| 24-Jan-2017         1:00         1.5         E           24-Jan-2017         2:00         1.2         NNE           24-Jan-2017         3:00         1.1         NNE           24-Jan-2017         4:00         1.3         NE           24-Jan-2017         5:00         1.4         NE           24-Jan-2017         6:00         1.3         NE           24-Jan-2017         7:00         1.4         NE           24-Jan-2017         8:00         1.8         NE           24-Jan-2017         9:00         2.1         ESE           24-Jan-2017         10:00         2.5         ESE           24-Jan-2017         11:00         2.6         ESE           24-Jan-2017         12:00         2.4         WSW           24-Jan-2017         13:00         2.5         NE           24-Jan-2017         14:00         2.9         S           24-Jan-2017         15:00         2.6         SE           24-Jan-2017         16:00         2.4         ESE           24-Jan-2017         18:00         1.8         ENE           24-Jan-2017         19:00         1.5         ESE           24-Jan-20 | 23-Jan-2017 | 23:00 | 1.4 | NE  |
| 24-Jan-2017         2:00         1.2         NNE           24-Jan-2017         3:00         1.1         NNE           24-Jan-2017         4:00         1.3         NE           24-Jan-2017         5:00         1.4         NE           24-Jan-2017         6:00         1.3         NE           24-Jan-2017         7:00         1.4         NE           24-Jan-2017         8:00         1.8         NE           24-Jan-2017         9:00         2.1         ESE           24-Jan-2017         10:00         2.5         ESE           24-Jan-2017         11:00         2.6         ESE           24-Jan-2017         12:00         2.4         WSW           24-Jan-2017         13:00         2.5         NE           24-Jan-2017         14:00         2.9         S           24-Jan-2017         15:00         2.6         SE           24-Jan-2017         16:00         2.4         ESE           24-Jan-2017         16:00         2.4         ESE           24-Jan-2017         18:00         1.8         ENE           24-Jan-2017         19:00         1.5         ESE           24-Jan | 24-Jan-2017 | 0:00  | 1.5 | SE  |
| 24-Jan-2017         3:00         1.1         NNE           24-Jan-2017         4:00         1.3         NE           24-Jan-2017         5:00         1.4         NE           24-Jan-2017         6:00         1.3         NE           24-Jan-2017         7:00         1.4         NE           24-Jan-2017         8:00         1.8         NE           24-Jan-2017         9:00         2.1         ESE           24-Jan-2017         10:00         2.5         ESE           24-Jan-2017         11:00         2.6         ESE           24-Jan-2017         12:00         2.4         WSW           24-Jan-2017         13:00         2.5         NE           24-Jan-2017         14:00         2.9         S           24-Jan-2017         15:00         2.6         SE           24-Jan-2017         16:00         2.4         ESE           24-Jan-2017         17:00         1.9         NE           24-Jan-2017         18:00         1.8         ENE           24-Jan-2017         19:00         1.5         ESE           24-Jan-2017         20:00         1.3         ENE           24-Jan | 24-Jan-2017 | 1:00  | 1.5 | E   |
| 24-Jan-2017       4:00       1.3       NE         24-Jan-2017       5:00       1.4       NE         24-Jan-2017       6:00       1.3       NE         24-Jan-2017       7:00       1.4       NE         24-Jan-2017       8:00       1.8       NE         24-Jan-2017       9:00       2.1       ESE         24-Jan-2017       10:00       2.5       ESE         24-Jan-2017       11:00       2.6       ESE         24-Jan-2017       12:00       2.4       WSW         24-Jan-2017       13:00       2.5       NE         24-Jan-2017       14:00       2.9       S         24-Jan-2017       15:00       2.6       SE         24-Jan-2017       15:00       2.6       SE         24-Jan-2017       16:00       2.4       ESE         24-Jan-2017       17:00       1.9       NE         24-Jan-2017       19:00       1.8       ENE         24-Jan-2017       20:00       1.3       ENE         24-Jan-2017       20:00       1.3       ENE         24-Jan-2017       20:00       1.2       SW         24-Jan-2017       20:00                                                                             | 24-Jan-2017 | 2:00  | 1.2 | NNE |
| 24-Jan-2017       5:00       1.4       NE         24-Jan-2017       6:00       1.3       NE         24-Jan-2017       7:00       1.4       NE         24-Jan-2017       8:00       1.8       NE         24-Jan-2017       9:00       2.1       ESE         24-Jan-2017       10:00       2.5       ESE         24-Jan-2017       11:00       2.6       ESE         24-Jan-2017       12:00       2.4       WSW         24-Jan-2017       13:00       2.5       NE         24-Jan-2017       14:00       2.9       S         24-Jan-2017       15:00       2.6       SE         24-Jan-2017       16:00       2.4       ESE         24-Jan-2017       17:00       1.9       NE         24-Jan-2017       18:00       1.8       ENE         24-Jan-2017       19:00       1.5       ESE         24-Jan-2017       20:00       1.3       ENE         24-Jan-2017       20:00       1.2       SW         24-Jan-2017       20:00       1.2       SW         24-Jan-2017       20:00       1.3       N         25-Jan-2017       0:00                                                                              | 24-Jan-2017 | 3:00  | 1.1 | NNE |
| 24-Jan-2017       6:00       1.3       NE         24-Jan-2017       7:00       1.4       NE         24-Jan-2017       8:00       1.8       NE         24-Jan-2017       9:00       2.1       ESE         24-Jan-2017       10:00       2.5       ESE         24-Jan-2017       11:00       2.6       ESE         24-Jan-2017       12:00       2.4       WSW         24-Jan-2017       13:00       2.5       NE         24-Jan-2017       14:00       2.9       S         24-Jan-2017       15:00       2.6       SE         24-Jan-2017       16:00       2.4       ESE         24-Jan-2017       16:00       2.4       ESE         24-Jan-2017       17:00       1.9       NE         24-Jan-2017       18:00       1.8       ENE         24-Jan-2017       19:00       1.5       ESE         24-Jan-2017       20:00       1.3       ENE         24-Jan-2017       21:00       1.2       SW         24-Jan-2017       23:00       1.3       W         25-Jan-2017       0:00       1.3       N         25-Jan-2017       1:00                                                                              | 24-Jan-2017 | 4:00  | 1.3 | NE  |
| 24-Jan-2017       7:00       1.4       NE         24-Jan-2017       8:00       1.8       NE         24-Jan-2017       9:00       2.1       ESE         24-Jan-2017       10:00       2.5       ESE         24-Jan-2017       11:00       2.6       ESE         24-Jan-2017       12:00       2.4       WSW         24-Jan-2017       13:00       2.5       NE         24-Jan-2017       14:00       2.9       S         24-Jan-2017       15:00       2.6       SE         24-Jan-2017       16:00       2.4       ESE         24-Jan-2017       17:00       1.9       NE         24-Jan-2017       18:00       1.8       ENE         24-Jan-2017       19:00       1.5       ESE         24-Jan-2017       20:00       1.3       ENE         24-Jan-2017       21:00       1.2       SSE         24-Jan-2017       22:00       1.2       SW         24-Jan-2017       23:00       1.3       N         25-Jan-2017       0:00       1.3       N         25-Jan-2017       1:00       1.2       SE         25-Jan-2017       2:00                                                                              | 24-Jan-2017 | 5:00  | 1.4 | NE  |
| 24-Jan-2017       8:00       1.8       NE         24-Jan-2017       9:00       2.1       ESE         24-Jan-2017       10:00       2.5       ESE         24-Jan-2017       11:00       2.6       ESE         24-Jan-2017       12:00       2.4       WSW         24-Jan-2017       13:00       2.5       NE         24-Jan-2017       14:00       2.9       S         24-Jan-2017       15:00       2.6       SE         24-Jan-2017       16:00       2.4       ESE         24-Jan-2017       17:00       1.9       NE         24-Jan-2017       18:00       1.8       ENE         24-Jan-2017       19:00       1.5       ESE         24-Jan-2017       20:00       1.3       ENE         24-Jan-2017       21:00       1.2       SSE         24-Jan-2017       22:00       1.2       SW         24-Jan-2017       23:00       1.3       N         25-Jan-2017       0:00       1.3       N         25-Jan-2017       1:00       1.2       SE         25-Jan-2017       2:00       1.2       SE                                                                                                             | 24-Jan-2017 | 6:00  | 1.3 | NE  |
| 24-Jan-2017       9:00       2.1       ESE         24-Jan-2017       10:00       2.5       ESE         24-Jan-2017       11:00       2.6       ESE         24-Jan-2017       12:00       2.4       WSW         24-Jan-2017       13:00       2.5       NE         24-Jan-2017       14:00       2.9       S         24-Jan-2017       15:00       2.6       SE         24-Jan-2017       15:00       2.4       ESE         24-Jan-2017       17:00       1.9       NE         24-Jan-2017       18:00       1.8       ENE         24-Jan-2017       19:00       1.5       ESE         24-Jan-2017       20:00       1.3       ENE         24-Jan-2017       21:00       1.2       SSE         24-Jan-2017       22:00       1.2       SW         24-Jan-2017       23:00       1.3       W         25-Jan-2017       0:00       1.3       N         25-Jan-2017       1:00       1.2       N         25-Jan-2017       2:00       1.2       SE         25-Jan-2017       3:00       1.1       SE                                                                                                              | 24-Jan-2017 | 7:00  | 1.4 | NE  |
| 24-Jan-2017       10:00       2.5       ESE         24-Jan-2017       11:00       2.6       ESE         24-Jan-2017       12:00       2.4       WSW         24-Jan-2017       13:00       2.5       NE         24-Jan-2017       14:00       2.9       S         24-Jan-2017       15:00       2.6       SE         24-Jan-2017       16:00       2.4       ESE         24-Jan-2017       17:00       1.9       NE         24-Jan-2017       18:00       1.8       ENE         24-Jan-2017       19:00       1.5       ESE         24-Jan-2017       20:00       1.3       ENE         24-Jan-2017       21:00       1.2       SSE         24-Jan-2017       22:00       1.2       SW         24-Jan-2017       23:00       1.3       W         25-Jan-2017       0:00       1.3       N         25-Jan-2017       1:00       1.2       N         25-Jan-2017       2:00       1.2       SE         25-Jan-2017       3:00       1.1       SE                                                                                                                                                                 | 24-Jan-2017 | 8:00  | 1.8 | NE  |
| 24-Jan-2017       11:00       2.6       ESE         24-Jan-2017       12:00       2.4       WSW         24-Jan-2017       13:00       2.5       NE         24-Jan-2017       14:00       2.9       S         24-Jan-2017       15:00       2.6       SE         24-Jan-2017       16:00       2.4       ESE         24-Jan-2017       17:00       1.9       NE         24-Jan-2017       18:00       1.8       ENE         24-Jan-2017       19:00       1.5       ESE         24-Jan-2017       20:00       1.3       ENE         24-Jan-2017       21:00       1.2       SSE         24-Jan-2017       22:00       1.2       SW         24-Jan-2017       23:00       1.3       W         25-Jan-2017       0:00       1.3       N         25-Jan-2017       1:00       1.2       N         25-Jan-2017       2:00       1.2       SE         25-Jan-2017       3:00       1.1       SE                                                                                                                                                                                                                     | 24-Jan-2017 | 9:00  | 2.1 | ESE |
| 24-Jan-2017       12:00       2.4       WSW         24-Jan-2017       13:00       2.5       NE         24-Jan-2017       14:00       2.9       S         24-Jan-2017       15:00       2.6       SE         24-Jan-2017       16:00       2.4       ESE         24-Jan-2017       17:00       1.9       NE         24-Jan-2017       18:00       1.8       ENE         24-Jan-2017       19:00       1.5       ESE         24-Jan-2017       20:00       1.3       ENE         24-Jan-2017       21:00       1.2       SSE         24-Jan-2017       22:00       1.2       SW         24-Jan-2017       23:00       1.3       W         25-Jan-2017       0:00       1.3       N         25-Jan-2017       1:00       1.2       N         25-Jan-2017       2:00       1.2       SE         25-Jan-2017       2:00       1.2       SE         25-Jan-2017       3:00       1.1       SE                                                                                                                                                                                                                       | 24-Jan-2017 | 10:00 | 2.5 | ESE |
| 24-Jan-2017       13:00       2.5       NE         24-Jan-2017       14:00       2.9       S         24-Jan-2017       15:00       2.6       SE         24-Jan-2017       16:00       2.4       ESE         24-Jan-2017       17:00       1.9       NE         24-Jan-2017       18:00       1.8       ENE         24-Jan-2017       19:00       1.5       ESE         24-Jan-2017       20:00       1.3       ENE         24-Jan-2017       21:00       1.2       SSE         24-Jan-2017       22:00       1.2       SW         24-Jan-2017       23:00       1.3       W         25-Jan-2017       0:00       1.3       N         25-Jan-2017       1:00       1.2       SE         25-Jan-2017       2:00       1.2       SE         25-Jan-2017       3:00       1.1       SE                                                                                                                                                                                                                                                                                                                            | 24-Jan-2017 | 11:00 | 2.6 | ESE |
| 24-Jan-2017       14:00       2.9       S         24-Jan-2017       15:00       2.6       SE         24-Jan-2017       16:00       2.4       ESE         24-Jan-2017       17:00       1.9       NE         24-Jan-2017       18:00       1.8       ENE         24-Jan-2017       19:00       1.5       ESE         24-Jan-2017       20:00       1.3       ENE         24-Jan-2017       21:00       1.2       SSE         24-Jan-2017       22:00       1.2       SW         24-Jan-2017       23:00       1.3       W         25-Jan-2017       0:00       1.3       N         25-Jan-2017       1:00       1.2       SE         25-Jan-2017       2:00       1.2       SE         25-Jan-2017       3:00       1.1       SE                                                                                                                                                                                                                                                                                                                                                                               | 24-Jan-2017 | 12:00 | 2.4 | WSW |
| 24-Jan-2017       15:00       2.6       SE         24-Jan-2017       16:00       2.4       ESE         24-Jan-2017       17:00       1.9       NE         24-Jan-2017       18:00       1.8       ENE         24-Jan-2017       19:00       1.5       ESE         24-Jan-2017       20:00       1.3       ENE         24-Jan-2017       21:00       1.2       SSE         24-Jan-2017       22:00       1.2       SW         24-Jan-2017       23:00       1.3       W         25-Jan-2017       0:00       1.3       N         25-Jan-2017       1:00       1.2       SE         25-Jan-2017       2:00       1.2       SE         25-Jan-2017       3:00       1.1       SE                                                                                                                                                                                                                                                                                                                                                                                                                                 | 24-Jan-2017 | 13:00 | 2.5 | NE  |
| 24-Jan-2017       16:00       2.4       ESE         24-Jan-2017       17:00       1.9       NE         24-Jan-2017       18:00       1.8       ENE         24-Jan-2017       19:00       1.5       ESE         24-Jan-2017       20:00       1.3       ENE         24-Jan-2017       21:00       1.2       SSE         24-Jan-2017       22:00       1.2       SW         24-Jan-2017       23:00       1.3       W         25-Jan-2017       0:00       1.3       N         25-Jan-2017       1:00       1.2       N         25-Jan-2017       2:00       1.2       SE         25-Jan-2017       3:00       1.1       SE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 24-Jan-2017 | 14:00 | 2.9 | S   |
| 24-Jan-2017       17:00       1.9       NE         24-Jan-2017       18:00       1.8       ENE         24-Jan-2017       19:00       1.5       ESE         24-Jan-2017       20:00       1.3       ENE         24-Jan-2017       21:00       1.2       SSE         24-Jan-2017       22:00       1.2       SW         24-Jan-2017       23:00       1.3       W         25-Jan-2017       0:00       1.3       N         25-Jan-2017       1:00       1.2       N         25-Jan-2017       2:00       1.2       SE         25-Jan-2017       3:00       1.1       SE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 24-Jan-2017 | 15:00 | 2.6 | SE  |
| 24-Jan-2017       18:00       1.8       ENE         24-Jan-2017       19:00       1.5       ESE         24-Jan-2017       20:00       1.3       ENE         24-Jan-2017       21:00       1.2       SSE         24-Jan-2017       22:00       1.2       SW         24-Jan-2017       23:00       1.3       W         25-Jan-2017       0:00       1.3       N         25-Jan-2017       1:00       1.2       N         25-Jan-2017       2:00       1.2       SE         25-Jan-2017       3:00       1.1       SE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 24-Jan-2017 | 16:00 | 2.4 | ESE |
| 24-Jan-2017       19:00       1.5       ESE         24-Jan-2017       20:00       1.3       ENE         24-Jan-2017       21:00       1.2       SSE         24-Jan-2017       22:00       1.2       SW         24-Jan-2017       23:00       1.3       W         25-Jan-2017       0:00       1.3       N         25-Jan-2017       1:00       1.2       N         25-Jan-2017       2:00       1.2       SE         25-Jan-2017       3:00       1.1       SE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 24-Jan-2017 | 17:00 | 1.9 | NE  |
| 24-Jan-2017       20:00       1.3       ENE         24-Jan-2017       21:00       1.2       SSE         24-Jan-2017       22:00       1.2       SW         24-Jan-2017       23:00       1.3       W         25-Jan-2017       0:00       1.3       N         25-Jan-2017       1:00       1.2       N         25-Jan-2017       2:00       1.2       SE         25-Jan-2017       3:00       1.1       SE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 24-Jan-2017 | 18:00 | 1.8 | ENE |
| 24-Jan-2017       21:00       1.2       SSE         24-Jan-2017       22:00       1.2       SW         24-Jan-2017       23:00       1.3       W         25-Jan-2017       0:00       1.3       N         25-Jan-2017       1:00       1.2       N         25-Jan-2017       2:00       1.2       SE         25-Jan-2017       3:00       1.1       SE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 24-Jan-2017 | 19:00 | 1.5 | ESE |
| 24-Jan-2017       22:00       1.2       SW         24-Jan-2017       23:00       1.3       W         25-Jan-2017       0:00       1.3       N         25-Jan-2017       1:00       1.2       N         25-Jan-2017       2:00       1.2       SE         25-Jan-2017       3:00       1.1       SE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 24-Jan-2017 | 20:00 | 1.3 | ENE |
| 24-Jan-2017       23:00       1.3       W         25-Jan-2017       0:00       1.3       N         25-Jan-2017       1:00       1.2       N         25-Jan-2017       2:00       1.2       SE         25-Jan-2017       3:00       1.1       SE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 24-Jan-2017 | 21:00 | 1.2 | SSE |
| 25-Jan-2017       0:00       1.3       N         25-Jan-2017       1:00       1.2       N         25-Jan-2017       2:00       1.2       SE         25-Jan-2017       3:00       1.1       SE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 24-Jan-2017 | 22:00 | 1.2 | SW  |
| 25-Jan-2017       1:00       1.2       N         25-Jan-2017       2:00       1.2       SE         25-Jan-2017       3:00       1.1       SE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 24-Jan-2017 | 23:00 | 1.3 | W   |
| 25-Jan-2017 2:00 1.2 SE<br>25-Jan-2017 3:00 1.1 SE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 25-Jan-2017 | 0:00  | 1.3 | N   |
| 25-Jan-2017 3:00 1.1 SE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 25-Jan-2017 | 1:00  | 1.2 | N   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 25-Jan-2017 | 2:00  | 1.2 | SE  |
| 25-Jan-2017 4:00 1 SSE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 25-Jan-2017 | 3:00  | 1.1 | SE  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 25-Jan-2017 | 4:00  | 1   | SSE |

| 25-Jan-2017         6:00         0.9         ESE           25-Jan-2017         7:00         1.2         SSE           25-Jan-2017         8:00         2         ENE           25-Jan-2017         9:00         2.6         NE           25-Jan-2017         10:00         2.7         ENE           25-Jan-2017         11:00         2.5         NE           25-Jan-2017         12:00         1.9         N           25-Jan-2017         13:00         2.4         SE           25-Jan-2017         14:00         2.3         SE           25-Jan-2017         15:00         2.8         SE           25-Jan-2017         16:00         2.4         ESE           25-Jan-2017         16:00         2.4         ESE           25-Jan-2017         16:00         2.4         ESE           25-Jan-2017         19:00         1.9         SE           25-Jan-2017         19:00         1.2         ESE           25-Jan-2017         20:00         0.9         SE           25-Jan-2017         20:00         0.7         SSE           25-Jan-2017         20:00         0.6         NE           26-Ja                                                                 | 25-Jan-2017 | 5:00  | 1.1 | SSE |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------|-----|-----|
| 25-Jan-2017         8:00         2         ENE           25-Jan-2017         9:00         2.6         NE           25-Jan-2017         10:00         2.7         ENE           25-Jan-2017         11:00         2.5         NE           25-Jan-2017         12:00         1.9         N           25-Jan-2017         13:00         2.4         SE           25-Jan-2017         14:00         2.3         SE           25-Jan-2017         15:00         2.8         SE           25-Jan-2017         16:00         2.4         ESE           25-Jan-2017         16:00         2.4         ESE           25-Jan-2017         16:00         2.4         ESE           25-Jan-2017         19:00         1.9         SE           25-Jan-2017         19:00         1.2         ESE           25-Jan-2017         20:00         0.9         SE           25-Jan-2017         20:00         0.7         SSE           25-Jan-2017         20:00         0.6         SE           25-Jan-2017         20:00         0.6         SE           25-Jan-2017         20:00         0.6         NE           26-Ja                                                                 | 25-Jan-2017 | 6:00  | 0.9 | ESE |
| 25-Jan-2017         9:00         2.6         NE           25-Jan-2017         10:00         2.7         ENE           25-Jan-2017         11:00         2.5         NE           25-Jan-2017         12:00         1.9         N           25-Jan-2017         13:00         2.4         SE           25-Jan-2017         14:00         2.3         SE           25-Jan-2017         15:00         2.8         SE           25-Jan-2017         16:00         2.4         ESE           25-Jan-2017         16:00         2.4         ESE           25-Jan-2017         17:00         1.9         SE           25-Jan-2017         18:00         1.6         SE           25-Jan-2017         19:00         1.2         ESE           25-Jan-2017         20:00         0.9         SE           25-Jan-2017         20:00         0.7         SSE           25-Jan-2017         22:00         0.6         SE           25-Jan-2017         23:00         0.7         SE           26-Jan-2017         0:00         0.8         SE           26-Jan-2017         1:00         0.6         NE           26-Jan                                                                 | 25-Jan-2017 | 7:00  | 1.2 | SSE |
| 25-Jan-2017         10:00         2.7         ENE           25-Jan-2017         11:00         2.5         NE           25-Jan-2017         12:00         1.9         N           25-Jan-2017         13:00         2.4         SE           25-Jan-2017         14:00         2.3         SE           25-Jan-2017         15:00         2.8         SE           25-Jan-2017         16:00         2.4         ESE           25-Jan-2017         17:00         1.9         SE           25-Jan-2017         18:00         1.6         SE           25-Jan-2017         19:00         1.2         ESE           25-Jan-2017         20:00         0.9         SE           25-Jan-2017         21:00         0.7         SSE           25-Jan-2017         21:00         0.7         SSE           25-Jan-2017         20:00         0.6         SE           25-Jan-2017         20:00         0.6         SE           25-Jan-2017         20:00         0.6         NE           26-Jan-2017         2:00         0.6         NE           26-Jan-2017         3:00         0.7         SE           26-Ja                                                                 | 25-Jan-2017 | 8:00  | 2   | ENE |
| 25-Jan-2017 11:00 2.5 NE 25-Jan-2017 12:00 1.9 N 25-Jan-2017 13:00 2.4 SE 25-Jan-2017 14:00 2.3 SE 25-Jan-2017 15:00 2.8 SE 25-Jan-2017 16:00 2.4 ESE 25-Jan-2017 17:00 1.9 SE 25-Jan-2017 18:00 1.6 SE 25-Jan-2017 19:00 1.2 ESE 25-Jan-2017 20:00 0.9 SE 25-Jan-2017 20:00 0.7 SSE 25-Jan-2017 20:00 0.7 SSE 25-Jan-2017 20:00 0.6 SE 25-Jan-2017 20:00 0.7 SE 25-Jan-2017 20:00 0.7 SE 25-Jan-2017 20:00 0.6 SE 25-Jan-2017 20:00 0.7 SE 26-Jan-2017 20:00 0.6 SE 26-Jan-2017 0:00 0.8 SE 26-Jan-2017 0:00 0.8 SE 26-Jan-2017 1:00 0.6 NE 26-Jan-2017 3:00 0.6 NE 26-Jan-2017 3:00 0.6 E 26-Jan-2017 4:00 0.5 ESE 26-Jan-2017 5:00 0.5 ENE 26-Jan-2017 6:00 0.4 NE 26-Jan-2017 7:00 0.6 NE 26-Jan-2017 8:00 1.9 ESE 26-Jan-2017 9:00 2.2 SE 26-Jan-2017 1:00 2.1 NE 26-Jan-2017 1:00 2.2 SE 26-Jan-2017 1:00 2.2 SSW                                                                                                                      | 25-Jan-2017 | 9:00  | 2.6 | NE  |
| 25-Jan-2017         12:00         1.9         N           25-Jan-2017         13:00         2.4         SE           25-Jan-2017         14:00         2.3         SE           25-Jan-2017         15:00         2.8         SE           25-Jan-2017         16:00         2.4         ESE           25-Jan-2017         17:00         1.9         SE           25-Jan-2017         18:00         1.6         SE           25-Jan-2017         19:00         1.2         ESE           25-Jan-2017         20:00         0.9         SE           25-Jan-2017         21:00         0.7         SSE           25-Jan-2017         22:00         0.6         SE           25-Jan-2017         23:00         0.7         SE           26-Jan-2017         23:00         0.7         SE           26-Jan-2017         1:00         0.6         NE           26-Jan-2017         2:00         0.6         NE           26-Jan-2017         2:00         0.6         NE           26-Jan-2017         3:00         0.6         NE           26-Jan-2017         4:00         0.5         ESE           26-Jan-20                                                                 | 25-Jan-2017 | 10:00 | 2.7 | ENE |
| 25-Jan-2017         13:00         2.4         SE           25-Jan-2017         14:00         2.3         SE           25-Jan-2017         15:00         2.8         SE           25-Jan-2017         16:00         2.4         ESE           25-Jan-2017         17:00         1.9         SE           25-Jan-2017         18:00         1.6         SE           25-Jan-2017         19:00         1.2         ESE           25-Jan-2017         20:00         0.9         SE           25-Jan-2017         21:00         0.7         SSE           25-Jan-2017         22:00         0.6         SE           25-Jan-2017         23:00         0.7         SE           26-Jan-2017         23:00         0.7         SE           26-Jan-2017         0:00         0.8         SE           26-Jan-2017         1:00         0.6         NE           26-Jan-2017         2:00         0.6         NE           26-Jan-2017         3:00         0.6         NE           26-Jan-2017         4:00         0.5         ESE           26-Jan-2017         5:00         0.5         ENE           26-Jan-2                                                                 | 25-Jan-2017 | 11:00 | 2.5 | NE  |
| 25-Jan-2017         14:00         2.3         SE           25-Jan-2017         15:00         2.8         SE           25-Jan-2017         16:00         2.4         ESE           25-Jan-2017         17:00         1.9         SE           25-Jan-2017         18:00         1.6         SE           25-Jan-2017         19:00         1.2         ESE           25-Jan-2017         20:00         0.9         SE           25-Jan-2017         21:00         0.7         SSE           25-Jan-2017         22:00         0.6         SE           25-Jan-2017         23:00         0.7         SE           26-Jan-2017         0:00         0.8         SE           26-Jan-2017         1:00         0.6         NE           26-Jan-2017         1:00         0.6         NE           26-Jan-2017         3:00         0.6         NE           26-Jan-2017         4:00         0.5         ESE           26-Jan-2017         5:00         0.5         ENE           26-Jan-2017         5:00         0.4         NE           26-Jan-2017         8:00         1.9         ESE           26-Jan-20                                                                 | 25-Jan-2017 | 12:00 | 1.9 | N   |
| 25-Jan-2017         15:00         2.8         SE           25-Jan-2017         16:00         2.4         ESE           25-Jan-2017         17:00         1.9         SE           25-Jan-2017         18:00         1.6         SE           25-Jan-2017         19:00         1.2         ESE           25-Jan-2017         20:00         0.9         SE           25-Jan-2017         21:00         0.7         SSE           25-Jan-2017         22:00         0.6         SE           25-Jan-2017         23:00         0.7         SE           26-Jan-2017         0:00         0.8         SE           26-Jan-2017         1:00         0.6         NE           26-Jan-2017         1:00         0.6         NE           26-Jan-2017         2:00         0.6         NE           26-Jan-2017         3:00         0.6         NE           26-Jan-2017         4:00         0.5         ESE           26-Jan-2017         5:00         0.5         ENE           26-Jan-2017         6:00         0.4         NE           26-Jan-2017         7:00         0.6         NE           26-Jan-2017                                                                 | 25-Jan-2017 | 13:00 | 2.4 | SE  |
| 25-Jan-2017         16:00         2.4         ESE           25-Jan-2017         17:00         1.9         SE           25-Jan-2017         18:00         1.6         SE           25-Jan-2017         19:00         1.2         ESE           25-Jan-2017         20:00         0.9         SE           25-Jan-2017         21:00         0.7         SSE           25-Jan-2017         22:00         0.6         SE           25-Jan-2017         23:00         0.7         SE           26-Jan-2017         0:00         0.8         SE           26-Jan-2017         1:00         0.6         NE           26-Jan-2017         2:00         0.6         NE           26-Jan-2017         2:00         0.6         NE           26-Jan-2017         3:00         0.6         NE           26-Jan-2017         4:00         0.5         ESE           26-Jan-2017         5:00         0.5         ENE           26-Jan-2017         6:00         0.4         NE           26-Jan-2017         8:00         1.9         ESE           26-Jan-2017         10:00         2.1         NE           26-Jan-201                                                                 | 25-Jan-2017 | 14:00 | 2.3 | SE  |
| 25-Jan-2017         17:00         1.9         SE           25-Jan-2017         18:00         1.6         SE           25-Jan-2017         19:00         1.2         ESE           25-Jan-2017         20:00         0.9         SE           25-Jan-2017         21:00         0.7         SSE           25-Jan-2017         22:00         0.6         SE           25-Jan-2017         23:00         0.7         SE           26-Jan-2017         0:00         0.8         SE           26-Jan-2017         0:00         0.8         SE           26-Jan-2017         1:00         0.6         NE           26-Jan-2017         2:00         0.6         NE           26-Jan-2017         3:00         0.6         E           26-Jan-2017         4:00         0.5         ESE           26-Jan-2017         5:00         0.5         ENE           26-Jan-2017         6:00         0.4         NE           26-Jan-2017         8:00         1.9         ESE           26-Jan-2017         9:00         2.2         SE           26-Jan-2017         10:00         2.1         NE           26-Jan-2017 </td <td>25-Jan-2017</td> <td>15:00</td> <td>2.8</td> <td>SE</td> | 25-Jan-2017 | 15:00 | 2.8 | SE  |
| 25-Jan-2017         18:00         1.6         SE           25-Jan-2017         19:00         1.2         ESE           25-Jan-2017         20:00         0.9         SE           25-Jan-2017         21:00         0.7         SSE           25-Jan-2017         22:00         0.6         SE           25-Jan-2017         23:00         0.7         SE           26-Jan-2017         0:00         0.8         SE           26-Jan-2017         1:00         0.6         NE           26-Jan-2017         2:00         0.6         NE           26-Jan-2017         3:00         0.6         E           26-Jan-2017         4:00         0.5         ESE           26-Jan-2017         5:00         0.5         ENE           26-Jan-2017         6:00         0.4         NE           26-Jan-2017         7:00         0.6         NE           26-Jan-2017         8:00         1.9         ESE           26-Jan-2017         10:00         2.2         SE           26-Jan-2017         11:00         1.6         SE           26-Jan-2017         12:00         2.2         SSW           26-Jan-2017                                                                 | 25-Jan-2017 | 16:00 | 2.4 | ESE |
| 25-Jan-2017       19:00       1.2       ESE         25-Jan-2017       20:00       0.9       SE         25-Jan-2017       21:00       0.7       SSE         25-Jan-2017       22:00       0.6       SE         25-Jan-2017       23:00       0.7       SE         26-Jan-2017       0:00       0.8       SE         26-Jan-2017       1:00       0.6       NE         26-Jan-2017       2:00       0.6       NE         26-Jan-2017       3:00       0.6       E         26-Jan-2017       4:00       0.5       ESE         26-Jan-2017       5:00       0.5       ENE         26-Jan-2017       6:00       0.4       NE         26-Jan-2017       7:00       0.6       NE         26-Jan-2017       8:00       1.9       ESE         26-Jan-2017       9:00       2.2       SE         26-Jan-2017       10:00       2.1       NE         26-Jan-2017       11:00       1.6       SE         26-Jan-2017       12:00       2.2       SSW         26-Jan-2017       13:00       2.5       ESE         26-Jan-2017       14:00                                                                                                                                                  | 25-Jan-2017 | 17:00 | 1.9 | SE  |
| 25-Jan-2017         20:00         0.9         SE           25-Jan-2017         21:00         0.7         SSE           25-Jan-2017         22:00         0.6         SE           25-Jan-2017         23:00         0.7         SE           26-Jan-2017         0:00         0.8         SE           26-Jan-2017         1:00         0.6         NE           26-Jan-2017         2:00         0.6         NE           26-Jan-2017         3:00         0.6         E           26-Jan-2017         4:00         0.5         ESE           26-Jan-2017         5:00         0.5         ENE           26-Jan-2017         6:00         0.4         NE           26-Jan-2017         7:00         0.6         NE           26-Jan-2017         8:00         1.9         ESE           26-Jan-2017         9:00         2.2         SE           26-Jan-2017         10:00         2.1         NE           26-Jan-2017         11:00         1.6         SE           26-Jan-2017         12:00         2.2         SSW           26-Jan-2017         14:00         2.5         ESE           26-Jan-2017<                                                                 | 25-Jan-2017 | 18:00 | 1.6 | SE  |
| 25-Jan-2017         21:00         0.7         SSE           25-Jan-2017         22:00         0.6         SE           25-Jan-2017         23:00         0.7         SE           26-Jan-2017         0:00         0.8         SE           26-Jan-2017         1:00         0.6         NE           26-Jan-2017         2:00         0.6         NE           26-Jan-2017         3:00         0.6         E           26-Jan-2017         4:00         0.5         ESE           26-Jan-2017         5:00         0.5         ENE           26-Jan-2017         6:00         0.4         NE           26-Jan-2017         7:00         0.6         NE           26-Jan-2017         8:00         1.9         ESE           26-Jan-2017         9:00         2.2         SE           26-Jan-2017         10:00         2.1         NE           26-Jan-2017         11:00         1.6         SE           26-Jan-2017         13:00         2.2         SSW           26-Jan-2017         14:00         2.2         SSW           26-Jan-2017         14:00         2.2         SSW           26-Jan-2017                                                                 | 25-Jan-2017 | 19:00 | 1.2 | ESE |
| 25-Jan-2017         22:00         0.6         SE           25-Jan-2017         23:00         0.7         SE           26-Jan-2017         0:00         0.8         SE           26-Jan-2017         1:00         0.6         NE           26-Jan-2017         2:00         0.6         NE           26-Jan-2017         3:00         0.6         E           26-Jan-2017         4:00         0.5         ESE           26-Jan-2017         5:00         0.5         ENE           26-Jan-2017         6:00         0.4         NE           26-Jan-2017         7:00         0.6         NE           26-Jan-2017         8:00         1.9         ESE           26-Jan-2017         9:00         2.2         SE           26-Jan-2017         10:00         2.1         NE           26-Jan-2017         11:00         1.6         SE           26-Jan-2017         13:00         2.2         SSW           26-Jan-2017         14:00         2.2         SSW           26-Jan-2017         14:00         2.2         SSW           26-Jan-2017         15:00         2.2         SE           26-Jan-2017<                                                                 | 25-Jan-2017 | 20:00 | 0.9 | SE  |
| 25-Jan-2017       23:00       0.7       SE         26-Jan-2017       0:00       0.8       SE         26-Jan-2017       1:00       0.6       NE         26-Jan-2017       2:00       0.6       NE         26-Jan-2017       3:00       0.6       E         26-Jan-2017       4:00       0.5       ESE         26-Jan-2017       5:00       0.5       ENE         26-Jan-2017       6:00       0.4       NE         26-Jan-2017       7:00       0.6       NE         26-Jan-2017       8:00       1.9       ESE         26-Jan-2017       9:00       2.2       SE         26-Jan-2017       10:00       2.1       NE         26-Jan-2017       11:00       1.6       SE         26-Jan-2017       12:00       2.2       SSW         26-Jan-2017       13:00       2.5       ESE         26-Jan-2017       14:00       2.2       SSW         26-Jan-2017       15:00       2.2       SE         26-Jan-2017       15:00       2.2       SE                                                                                                                                                                                                                                      | 25-Jan-2017 | 21:00 | 0.7 | SSE |
| 26-Jan-2017       0:00       0.8       SE         26-Jan-2017       1:00       0.6       NE         26-Jan-2017       2:00       0.6       NE         26-Jan-2017       3:00       0.6       E         26-Jan-2017       4:00       0.5       ESE         26-Jan-2017       5:00       0.5       ENE         26-Jan-2017       6:00       0.4       NE         26-Jan-2017       7:00       0.6       NE         26-Jan-2017       8:00       1.9       ESE         26-Jan-2017       9:00       2.2       SE         26-Jan-2017       10:00       2.1       NE         26-Jan-2017       11:00       1.6       SE         26-Jan-2017       12:00       2.2       SSW         26-Jan-2017       13:00       2.5       ESE         26-Jan-2017       14:00       2.2       SSW         26-Jan-2017       15:00       2.2       SE         26-Jan-2017       15:00       2.2       SE                                                                                                                                                                                                                                                                                         | 25-Jan-2017 | 22:00 | 0.6 | SE  |
| 26-Jan-2017       1:00       0.6       NE         26-Jan-2017       2:00       0.6       NE         26-Jan-2017       3:00       0.6       E         26-Jan-2017       4:00       0.5       ESE         26-Jan-2017       5:00       0.5       ENE         26-Jan-2017       6:00       0.4       NE         26-Jan-2017       7:00       0.6       NE         26-Jan-2017       8:00       1.9       ESE         26-Jan-2017       9:00       2.2       SE         26-Jan-2017       10:00       2.1       NE         26-Jan-2017       11:00       1.6       SE         26-Jan-2017       12:00       2.2       SSW         26-Jan-2017       13:00       2.5       ESE         26-Jan-2017       14:00       2.2       SSW         26-Jan-2017       15:00       2.2       SE         26-Jan-2017       15:00       2.2       SE         26-Jan-2017       16:00       2.1       SE                                                                                                                                                                                                                                                                                        | 25-Jan-2017 | 23:00 | 0.7 | SE  |
| 26-Jan-2017       2:00       0.6       NE         26-Jan-2017       3:00       0.6       E         26-Jan-2017       4:00       0.5       ESE         26-Jan-2017       5:00       0.5       ENE         26-Jan-2017       6:00       0.4       NE         26-Jan-2017       7:00       0.6       NE         26-Jan-2017       8:00       1.9       ESE         26-Jan-2017       9:00       2.2       SE         26-Jan-2017       10:00       2.1       NE         26-Jan-2017       11:00       1.6       SE         26-Jan-2017       12:00       2.2       SSW         26-Jan-2017       13:00       2.5       ESE         26-Jan-2017       14:00       2.2       SSW         26-Jan-2017       15:00       2.2       SE         26-Jan-2017       15:00       2.2       SE                                                                                                                                                                                                                                                                                                                                                                                             | 26-Jan-2017 | 0:00  | 0.8 | SE  |
| 26-Jan-2017       3:00       0.6       E         26-Jan-2017       4:00       0.5       ESE         26-Jan-2017       5:00       0.5       ENE         26-Jan-2017       6:00       0.4       NE         26-Jan-2017       7:00       0.6       NE         26-Jan-2017       8:00       1.9       ESE         26-Jan-2017       9:00       2.2       SE         26-Jan-2017       10:00       2.1       NE         26-Jan-2017       11:00       1.6       SE         26-Jan-2017       12:00       2.2       SSW         26-Jan-2017       13:00       2.5       ESE         26-Jan-2017       14:00       2.2       SSW         26-Jan-2017       15:00       2.2       SE         26-Jan-2017       15:00       2.2       SE                                                                                                                                                                                                                                                                                                                                                                                                                                               | 26-Jan-2017 | 1:00  | 0.6 | NE  |
| 26-Jan-2017       4:00       0.5       ESE         26-Jan-2017       5:00       0.5       ENE         26-Jan-2017       6:00       0.4       NE         26-Jan-2017       7:00       0.6       NE         26-Jan-2017       8:00       1.9       ESE         26-Jan-2017       9:00       2.2       SE         26-Jan-2017       10:00       2.1       NE         26-Jan-2017       11:00       1.6       SE         26-Jan-2017       12:00       2.2       SSW         26-Jan-2017       13:00       2.5       ESE         26-Jan-2017       14:00       2.2       SSW         26-Jan-2017       15:00       2.2       SE         26-Jan-2017       15:00       2.2       SE         26-Jan-2017       15:00       2.2       SE                                                                                                                                                                                                                                                                                                                                                                                                                                             | 26-Jan-2017 | 2:00  | 0.6 | NE  |
| 26-Jan-2017       5:00       0.5       ENE         26-Jan-2017       6:00       0.4       NE         26-Jan-2017       7:00       0.6       NE         26-Jan-2017       8:00       1.9       ESE         26-Jan-2017       9:00       2.2       SE         26-Jan-2017       10:00       2.1       NE         26-Jan-2017       11:00       1.6       SE         26-Jan-2017       12:00       2.2       SSW         26-Jan-2017       13:00       2.5       ESE         26-Jan-2017       14:00       2.2       SSW         26-Jan-2017       15:00       2.2       SE         26-Jan-2017       15:00       2.2       SE         26-Jan-2017       15:00       2.2       SE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 26-Jan-2017 | 3:00  | 0.6 | E   |
| 26-Jan-2017       6:00       0.4       NE         26-Jan-2017       7:00       0.6       NE         26-Jan-2017       8:00       1.9       ESE         26-Jan-2017       9:00       2.2       SE         26-Jan-2017       10:00       2.1       NE         26-Jan-2017       11:00       1.6       SE         26-Jan-2017       12:00       2.2       SSW         26-Jan-2017       13:00       2.5       ESE         26-Jan-2017       14:00       2.2       SSW         26-Jan-2017       15:00       2.2       SE         26-Jan-2017       15:00       2.2       SE         26-Jan-2017       16:00       2.1       SE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 26-Jan-2017 | 4:00  | 0.5 | ESE |
| 26-Jan-2017       7:00       0.6       NE         26-Jan-2017       8:00       1.9       ESE         26-Jan-2017       9:00       2.2       SE         26-Jan-2017       10:00       2.1       NE         26-Jan-2017       11:00       1.6       SE         26-Jan-2017       12:00       2.2       SSW         26-Jan-2017       13:00       2.5       ESE         26-Jan-2017       14:00       2.2       SSW         26-Jan-2017       15:00       2.2       SE         26-Jan-2017       16:00       2.1       SE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 26-Jan-2017 | 5:00  | 0.5 | ENE |
| 26-Jan-2017       8:00       1.9       ESE         26-Jan-2017       9:00       2.2       SE         26-Jan-2017       10:00       2.1       NE         26-Jan-2017       11:00       1.6       SE         26-Jan-2017       12:00       2.2       SSW         26-Jan-2017       13:00       2.5       ESE         26-Jan-2017       14:00       2.2       SSW         26-Jan-2017       15:00       2.2       SE         26-Jan-2017       16:00       2.1       SE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 26-Jan-2017 | 6:00  | 0.4 | NE  |
| 26-Jan-2017       9:00       2.2       SE         26-Jan-2017       10:00       2.1       NE         26-Jan-2017       11:00       1.6       SE         26-Jan-2017       12:00       2.2       SSW         26-Jan-2017       13:00       2.5       ESE         26-Jan-2017       14:00       2.2       SSW         26-Jan-2017       15:00       2.2       SE         26-Jan-2017       16:00       2.1       SE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 26-Jan-2017 | 7:00  | 0.6 | NE  |
| 26-Jan-2017       10:00       2.1       NE         26-Jan-2017       11:00       1.6       SE         26-Jan-2017       12:00       2.2       SSW         26-Jan-2017       13:00       2.5       ESE         26-Jan-2017       14:00       2.2       SSW         26-Jan-2017       15:00       2.2       SE         26-Jan-2017       16:00       2.1       SE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 26-Jan-2017 | 8:00  | 1.9 | ESE |
| 26-Jan-2017       11:00       1.6       SE         26-Jan-2017       12:00       2.2       SSW         26-Jan-2017       13:00       2.5       ESE         26-Jan-2017       14:00       2.2       SSW         26-Jan-2017       15:00       2.2       SE         26-Jan-2017       16:00       2.1       SE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 26-Jan-2017 | 9:00  | 2.2 | SE  |
| 26-Jan-2017       12:00       2.2       SSW         26-Jan-2017       13:00       2.5       ESE         26-Jan-2017       14:00       2.2       SSW         26-Jan-2017       15:00       2.2       SE         26-Jan-2017       16:00       2.1       SE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 26-Jan-2017 | 10:00 | 2.1 | NE  |
| 26-Jan-2017       13:00       2.5       ESE         26-Jan-2017       14:00       2.2       SSW         26-Jan-2017       15:00       2.2       SE         26-Jan-2017       16:00       2.1       SE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 26-Jan-2017 | 11:00 | 1.6 | SE  |
| 26-Jan-2017       14:00       2.2       SSW         26-Jan-2017       15:00       2.2       SE         26-Jan-2017       16:00       2.1       SE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 26-Jan-2017 | 12:00 | 2.2 | SSW |
| 26-Jan-2017     15:00     2.2     SE       26-Jan-2017     16:00     2.1     SE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 26-Jan-2017 | 13:00 | 2.5 | ESE |
| 26-Jan-2017 16:00 2.1 SE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 26-Jan-2017 | 14:00 | 2.2 | SSW |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 26-Jan-2017 | 15:00 | 2.2 | SE  |
| 26-Jan-2017 17:00 1.7 SE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 26-Jan-2017 | 16:00 | 2.1 | SE  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 26-Jan-2017 | 17:00 | 1.7 | SE  |

| 26-Jan-2017 | 18:00 | 1.2 | NE  |
|-------------|-------|-----|-----|
| 26-Jan-2017 | 19:00 | 1   | NE  |
| 26-Jan-2017 | 20:00 | 1.2 | ESE |
| 26-Jan-2017 | 21:00 | 1.8 | ESE |
| 26-Jan-2017 | 22:00 | 1.8 | ESE |
| 26-Jan-2017 | 23:00 | 1.8 | NE  |
| 27-Jan-2017 | 0:00  | 1.4 | ENE |
| 27-Jan-2017 | 1:00  | 1.6 | SSW |
| 27-Jan-2017 | 2:00  | 1.4 | SSE |
| 27-Jan-2017 | 3:00  | 1.2 | ENE |
| 27-Jan-2017 | 4:00  | 1.1 | SSE |
| 27-Jan-2017 | 5:00  | 1   | ESE |
| 27-Jan-2017 | 6:00  | 0.9 | NE  |
| 27-Jan-2017 | 7:00  | 0.9 | NNE |
| 27-Jan-2017 | 8:00  | 1.3 | WSW |
| 27-Jan-2017 | 9:00  | 1.6 | WNW |
| 27-Jan-2017 | 10:00 | 1.4 | WSW |
| 27-Jan-2017 | 11:00 | 1.5 | ENE |
| 27-Jan-2017 | 12:00 | 2.4 | NE  |
| 27-Jan-2017 | 13:00 | 2.4 | SW  |
| 27-Jan-2017 | 14:00 | 2.5 | SE  |
| 27-Jan-2017 | 15:00 | 2.3 | SE  |
| 27-Jan-2017 | 16:00 | 2.1 | SE  |
| 27-Jan-2017 | 17:00 | 2.1 | SE  |
| 27-Jan-2017 | 18:00 | 1.6 | SE  |
| 27-Jan-2017 | 19:00 | 1.2 | WNW |
| 27-Jan-2017 | 20:00 | 1   | ENE |
| 27-Jan-2017 | 21:00 | 1.6 | ENE |
| 27-Jan-2017 | 22:00 | 0.8 | N   |
| 27-Jan-2017 | 23:00 | 1   | N   |
| 28-Jan-2017 | 0:00  | 0.9 | NNE |
| 28-Jan-2017 | 1:00  | 0.8 | ESE |
| 28-Jan-2017 | 2:00  | 0.8 | ENE |
| 28-Jan-2017 | 3:00  | 1.7 | NE  |
| 28-Jan-2017 | 4:00  | 1.6 | ENE |
| 28-Jan-2017 | 5:00  | 1.4 | ENE |
| 28-Jan-2017 | 6:00  | 1.4 | ENE |

| 28-Jan-2017 | 7:00  | 1.6 | NE  |
|-------------|-------|-----|-----|
| 28-Jan-2017 | 8:00  | 1.8 | N   |
| 28-Jan-2017 | 9:00  | 2.3 | ENE |
| 28-Jan-2017 | 10:00 | 3.1 | NE  |
| 28-Jan-2017 | 11:00 | 3.1 | W   |
| 28-Jan-2017 | 12:00 | 2.7 | N   |
| 28-Jan-2017 | 13:00 | 2.8 | NE  |
| 28-Jan-2017 | 14:00 | 2.8 | ENE |
| 28-Jan-2017 | 15:00 | 3.3 | ENE |
| 28-Jan-2017 | 16:00 | 2.7 | SE  |
| 28-Jan-2017 | 17:00 | 3.2 | NE  |
| 28-Jan-2017 | 18:00 | 2.5 | NE  |
| 28-Jan-2017 | 19:00 | 2.4 | NE  |
| 28-Jan-2017 | 20:00 | 2.2 | NNE |
| 28-Jan-2017 | 21:00 | 1.9 | NE  |
| 28-Jan-2017 | 22:00 | 2   | NE  |
| 28-Jan-2017 | 23:00 | 2   | NNE |
| 29-Jan-2017 | 0:00  | 2.1 | ESE |
| 29-Jan-2017 | 1:00  | 1.4 | NE  |
| 29-Jan-2017 | 2:00  | 1.6 | NE  |
| 29-Jan-2017 | 3:00  | 1.9 | NE  |
| 29-Jan-2017 | 4:00  | 1.8 | NE  |
| 29-Jan-2017 | 5:00  | 1.8 | NNE |
| 29-Jan-2017 | 6:00  | 1.8 | NNE |
| 29-Jan-2017 | 7:00  | 1.7 | NNE |
| 29-Jan-2017 | 8:00  | 1.9 | NNE |
| 29-Jan-2017 | 9:00  | 2.6 | NNE |
| 29-Jan-2017 | 10:00 | 2.9 | NNE |
| 29-Jan-2017 | 11:00 | 2.7 | N   |
| 29-Jan-2017 | 12:00 | 3   | NNE |
| 29-Jan-2017 | 13:00 | 2.7 | NW  |
| 29-Jan-2017 | 14:00 | 2.6 | WNW |
| 29-Jan-2017 | 15:00 | 2.9 | SSW |
| 29-Jan-2017 | 16:00 | 2.4 | W   |
| 29-Jan-2017 | 17:00 | 2.2 | WNW |
| 29-Jan-2017 | 18:00 | 1.7 | W   |
| 29-Jan-2017 | 19:00 | 1.3 | W   |
|             |       |     |     |

| 29-Jan-2017 | 20:00 | 1.3 | WNW |
|-------------|-------|-----|-----|
| 29-Jan-2017 | 21:00 | 1.1 | S   |
| 29-Jan-2017 | 22:00 | 1.1 | NNE |
| 29-Jan-2017 | 23:00 | 0.9 | SSW |
| 30-Jan-2017 | 0:00  | 1   | SSW |
| 30-Jan-2017 | 1:00  | 1.1 | SW  |
| 30-Jan-2017 | 2:00  | 0.9 | ENE |
| 30-Jan-2017 | 3:00  | 1   | ENE |
| 30-Jan-2017 | 4:00  | 1.2 | NE  |
| 30-Jan-2017 | 5:00  | 1.1 | N   |
| 30-Jan-2017 | 6:00  | 1.1 | N   |
| 30-Jan-2017 | 7:00  | 1.2 | N   |
| 30-Jan-2017 | 8:00  | 1.3 | N   |
| 30-Jan-2017 | 9:00  | 1.9 | N   |
| 30-Jan-2017 | 10:00 | 1.8 | NNE |
| 30-Jan-2017 | 11:00 | 2.3 | NE  |
| 30-Jan-2017 | 12:00 | 2.6 | N   |
| 30-Jan-2017 | 13:00 | 2.1 | NE  |
| 30-Jan-2017 | 14:00 | 2.4 | ENE |
| 30-Jan-2017 | 15:00 | 2.4 | ENE |
| 30-Jan-2017 | 16:00 | 2   | ENE |
| 30-Jan-2017 | 17:00 | 1.6 | ENE |
| 30-Jan-2017 | 18:00 | 1.3 | SE  |
| 30-Jan-2017 | 19:00 | 1.4 | SSE |
| 30-Jan-2017 | 20:00 | 1.2 | N   |
| 30-Jan-2017 | 21:00 | 1.2 | SSE |
| 30-Jan-2017 | 22:00 | 1   | ENE |
| 30-Jan-2017 | 23:00 | 1.4 | NE  |
| 31-Jan-2017 | 0:00  | 1.1 | ENE |
| 31-Jan-2017 | 1:00  | 1.2 | NNE |
| 31-Jan-2017 | 2:00  | 1.2 | ESE |
| 31-Jan-2017 | 3:00  | 1.3 | NE  |
| 31-Jan-2017 | 4:00  | 1.2 | NE  |
| 31-Jan-2017 | 5:00  | 1.3 | NE  |
| 31-Jan-2017 | 6:00  | 1.1 | NNE |
| 31-Jan-2017 | 7:00  | 1.1 | N   |
| 31-Jan-2017 | 8:00  | 1.6 | N   |

| 31-Jan-2017 | 9:00  | 1.8 | N   |
|-------------|-------|-----|-----|
| 31-Jan-2017 | 10:00 | 1.9 | NNE |
| 31-Jan-2017 | 11:00 | 1.9 | N   |
| 31-Jan-2017 | 12:00 | 1.7 | N   |
| 31-Jan-2017 | 13:00 | 1.6 | NW  |
| 31-Jan-2017 | 14:00 | 1.6 | W   |
| 31-Jan-2017 | 15:00 | 1.9 | WNW |
| 31-Jan-2017 | 16:00 | 1.8 | N   |
| 31-Jan-2017 | 17:00 | 1.8 | W   |
| 31-Jan-2017 | 18:00 | 1.2 | W   |
| 31-Jan-2017 | 19:00 | 1.4 | SW  |
| 31-Jan-2017 | 20:00 | 1.7 | SW  |
| 31-Jan-2017 | 21:00 | 1.2 | WNW |
| 31-Jan-2017 | 22:00 | 0.9 | W   |
| 31-Jan-2017 | 23:00 | 1   | ENE |

### APPENDIX D ENVIRONMENTAL MONITORING SCHEDULES

#### Contract No. KLN/2016/04

### **Environmental Monitoring Works for Contract No. KL/2015/02**

### Kai Tak Development –Stage 5A Infrastructure at Former North Apron Area Impact Air and Noise Monitoring Schedule for January 2017

| Sunday  | Monday             | Tuesday | Wednesday | Thursday        | Friday      | Saturday |
|---------|--------------------|---------|-----------|-----------------|-------------|----------|
| 1-Jan   | 2-Jan              | 3-Jan   | 4-Jan     | 5-Jan           | 6-Jan       | 7-Jan    |
|         |                    |         |           |                 |             |          |
|         |                    |         |           |                 |             |          |
|         |                    |         |           |                 |             |          |
|         |                    |         |           |                 |             |          |
|         |                    |         |           |                 |             |          |
|         |                    |         |           |                 |             |          |
| 8-Jan   | 9-Jan              | 10-Jan  | 11-Jan    | 12-Jan          | 13-Jan      | 14-Jan   |
|         |                    |         |           |                 |             |          |
|         |                    |         |           |                 |             |          |
|         |                    |         |           |                 |             |          |
|         |                    |         |           |                 |             |          |
|         |                    |         |           |                 |             |          |
| 15-Jan  | 16-Jan             | 17-Jan  | 18-Jan    | 19-Jan          | 20-Jan      | 21-Jan   |
| 13-3411 | 10-3411            | 17-3411 | 10-3411   | 19-3411         | 20-3411     | 21-3411  |
|         | 1 hr TSP X3        | Noise   |           |                 | 1 hr TSP X3 |          |
|         | (AM2)              | M5(C)   |           |                 | (AM2)       |          |
|         |                    |         |           |                 |             |          |
|         | Noise<br>(M3 & M4) |         |           |                 |             |          |
|         | (NI3 & NI4)        |         |           | 24 hr TSP       |             |          |
| 22-Jan  | 23-Jan             | 24-Jan  | 25-Jan    | 26-Jan          | 27-Jan      | 28-Jan   |
|         |                    |         |           |                 |             |          |
|         |                    |         |           | 1 hr TSP X3     |             |          |
|         |                    |         |           | (AM2)           |             |          |
|         | Noise<br>M5(C)     |         |           | Noise           |             |          |
|         | M3(C)              |         |           | (M3 & M4)       |             |          |
|         |                    |         | 24 hr TSP | (0.55 00 5.5 1) | 24 hr TSP   |          |
| 29-Jan  | 30-Jan             | 31-Jan  |           |                 |             |          |
|         |                    |         |           |                 |             |          |
|         |                    |         |           |                 |             |          |
|         |                    |         |           |                 |             |          |
|         |                    |         |           |                 |             |          |
|         |                    |         |           |                 |             |          |
|         |                    |         |           |                 |             |          |

Air Quality Monitoring Station

Noise Monitoring Station

AM2 - Lee Kau Yan Memorial School

M3 - Cognitio College M4 - Lee Kau Yan Memorial School M5(C) - Mercy Grace's Home

#### Contract No. KLN/2016/04

### Environmental Monitoring Works for Contract No. KL/2015/02 Kai Tak Development –Stage 5A Infrastructure at Former North Apron Area Tentative Impact Air and Noise Monitoring Schedule for February 2017

| Sunday | Monday      | Tuesday            | Wednesday            |         | Thursday    |         | Friday         | Saturday |        |
|--------|-------------|--------------------|----------------------|---------|-------------|---------|----------------|----------|--------|
|        |             |                    |                      | 1-Feb   |             | 2-Feb   | 3-F            | eb       | 4-Feb  |
|        |             |                    | 1.1 TOD V2           |         |             |         | NT '           |          |        |
|        |             |                    | 1 hr TSP X3<br>(AM2) |         |             |         | Noise<br>M5(C) |          |        |
|        |             |                    | (AM2)                |         |             |         | WI3(C)         |          |        |
|        |             |                    | Noise                |         |             |         |                |          |        |
|        |             |                    | (M3 & M4)            |         |             |         |                |          |        |
|        |             |                    |                      |         | 24 hr TSP   |         |                |          |        |
| 5-Feb  | 6-Fe        | 7-F                | eb                   | 8-Feb   |             | 9-Feb   | 10-F           | eb       | 11-Feb |
|        | 1 hr TSP X3 |                    |                      |         | 1 hr TSP X3 |         |                |          |        |
|        | (AM2)       |                    |                      |         | (AM2)       |         |                |          |        |
|        |             |                    |                      |         | (11112)     |         |                |          |        |
|        | Noise       |                    |                      |         | Noise       |         |                |          |        |
|        | (M3 & M4)   |                    |                      |         | M5(C)       |         |                |          |        |
| 12-Feb | 13-Fe       | b 14-F             | 24 hr TSP            | 15-Feb  |             | 16-Feb  | 17-F           | ah.      | 18-Feb |
| 12-Feb | 15-Fe       | 14-F               | eu                   | 13-160  |             | 10-560  | 1/-Γ           | :0       | 16-Feb |
|        |             |                    | 1 hr TSP X3          |         | Noise       |         |                |          |        |
|        |             |                    | (AM2)                |         | M5(C)       |         |                |          |        |
|        |             |                    |                      |         |             |         |                |          |        |
|        |             |                    | Noise                |         |             |         |                |          |        |
|        |             | 24 hr TSP          | (M3 & M4)            |         |             |         |                |          |        |
| 19-Feb | 20-Fe       |                    | eh                   | 22-Feb  |             | 23-Feb  | 24-F           | eh.      | 25-Feb |
| 13 160 | 2010        | 211                |                      | 22 7 00 |             | 20 1 00 | 2,1,           |          | 20 100 |
|        |             | 1 hr TSP X3        |                      |         |             |         |                |          |        |
|        |             | (AM2)              |                      |         |             |         |                |          |        |
|        |             | N                  |                      |         |             |         | Noise          |          |        |
|        |             | Noise<br>(M3 & M4) |                      |         |             |         | M5(C)          |          |        |
|        | 24 hr TSP   | (IVI3 & IVI4)      |                      |         |             |         | 24 hr TSP      |          |        |
| 26-Feb | 27-Fe       | 28-F               | eb                   |         |             |         | 2.111.101      |          |        |
|        |             |                    |                      |         |             |         |                |          |        |
|        | 1 hr TSP X3 |                    |                      |         |             |         |                |          |        |
|        | (AM2)       |                    |                      |         |             |         |                |          |        |
|        | Noise       |                    |                      |         |             |         |                |          |        |
|        | (M3 & M4)   |                    |                      |         |             |         |                |          |        |
|        | · /         |                    |                      |         |             |         |                |          |        |

The schedule may be changed due to unforeseen circumstances (adverse weather, etc)

**Air Quality Monitoring Station** 

Noise Monitoring Station

AM2 - Lee Kau Yan Memorial School

M3 - Cognitio College M4 - Lee Kau Yan Memorial School M5(C) - Mercy Grace's Home


### APPENDIX E 1-HOUR TSP MONITORING RESULTS AND GRAPHICAL PRESENTATION

## **Appendix E - 1-hour TSP Monitoring Results**

| Location AM2 - Lee Kau Yan Memorial School |       |         |                                    |  |  |  |  |  |
|--------------------------------------------|-------|---------|------------------------------------|--|--|--|--|--|
| Date                                       | Time  | Weather | Particulate Concentration ( μg/m3) |  |  |  |  |  |
| 16-Jan-17                                  | 8:45  | Fine    | 182.5                              |  |  |  |  |  |
| 16-Jan-17                                  | 9:45  | Fine    | 183.4                              |  |  |  |  |  |
| 16-Jan-17                                  | 10:45 | Fine    | 186.0                              |  |  |  |  |  |
| 20-Jan-17                                  | 9:00  | Sunny   | 173.0                              |  |  |  |  |  |
| 20-Jan-17                                  | 10:00 | Sunny   | 178.0                              |  |  |  |  |  |
| 20-Jan-17                                  | 11:00 | Sunny   | 184.4                              |  |  |  |  |  |
| 26-Jan-17                                  | 9:00  | Sunny   | 222.4                              |  |  |  |  |  |
| 26-Jan-17                                  | 10:00 | Sunny   | 230.2                              |  |  |  |  |  |
| 26-Jan-17                                  | 11:00 | Sunny   | 232.2                              |  |  |  |  |  |
|                                            |       | Average | 196.9                              |  |  |  |  |  |
|                                            |       | Maximum | 232.2                              |  |  |  |  |  |
|                                            |       | Minimum | 173.0                              |  |  |  |  |  |

MA16043/App E - 1hr TSP Cinotech

#### 1-hr TSP Concentration Levels

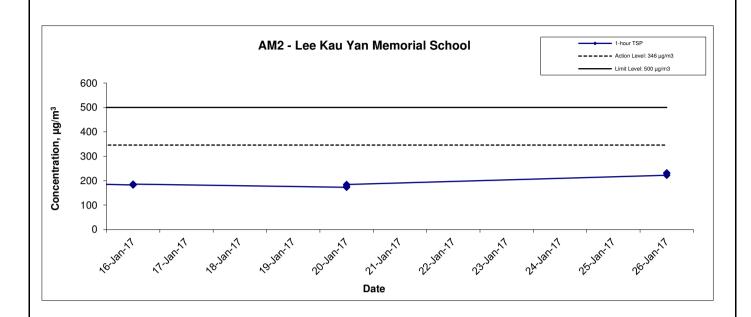

Title Contract No. KLN/2016/04
Environmental Monitoring Works for Contract No. KL/2015/02
Kai Tak Development –Stage 5A Infrastructure at Former North Apron

Graphical Presentation of 1-hour TSP Monitoring Results

Scale N.T.S No. MA16043

Date Jan 17 Appendix E



APPENDIX F 24-HOUR TSP MONITORING RESULTS AND GRAPHICAL PRESENTATION


### Appendix F - 24-hour TSP Monitoring Results

#### Location AM2 - Lee Kau Yan Memorial School

| Start Date | Weather   | Air       | Atmospheric         | Filter W | eight (g) | Particulate | Elapse  | e Time  | Sampling   | Flow Rate | e (m³/min.) | Av. flow              | Total vol.        | Conc.         |
|------------|-----------|-----------|---------------------|----------|-----------|-------------|---------|---------|------------|-----------|-------------|-----------------------|-------------------|---------------|
| Start Date | Condition | Temp. (K) | Pressure, Pa (mmHg) | Initial  | Final     | weight (g)  | Initial | Final   | Time(hrs.) | Initial   | Final       | (m <sup>3</sup> /min) | (m <sup>3</sup> ) | $(\mu g/m^3)$ |
| 19-Jan-17  | Cloudy    | 293.5     | 768.8               | 3.6150   | 3.7787    | 0.1637      | 17669.5 | 17693.5 | 24.0       | 1.23      | 1.23        | 1.23                  | 1771.2            | 92.4          |
| 25-Jan-17  | Sunny     | 292.3     | 772.7               | 3.5654   | 3.7283    | 0.1629      | 17693.5 | 17717.5 | 24.0       | 1.21      | 1.21        | 1.21                  | 1741.2            | 93.6          |
| 27-Jan-17  | Sunny     | 292.4     | 771.5               | 3.6003   | 3.7198    | 0.1195      | 17717.5 | 17741.5 | 24.0       | 1.21      | 1.21        | 1.21                  | 1739.6            | 68.7          |
|            |           |           |                     |          |           |             |         |         |            |           |             |                       | Min               | 68.7          |
|            |           |           |                     |          |           |             |         |         |            |           |             |                       | Max               | 93.6          |
|            |           |           |                     |          |           |             |         |         |            |           |             |                       | Average           | 84.9          |

MA16043/App F - 24hr TSP

#### 24-hr TSP Concentration Levels

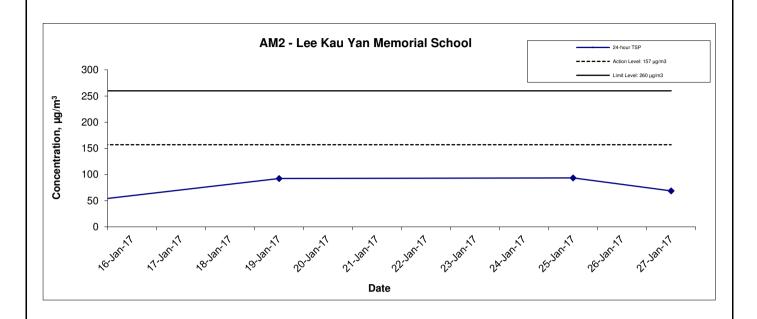

Title Contract No. KLN/2016/04
Environmental Monitoring Works for Contract No. KL/2015/02
Kai Tak Development –Stage 5A Infrastructure at Former North Apron
Graphical Presentation of 24-hour TSP Monitoring Results

Ja

| Scale |        | Project |         |
|-------|--------|---------|---------|
|       | N.T.S  | No.     | MA16043 |
| Date  |        | Appendi | Х       |
|       | Jan 17 |         | F       |



APPENDIX G NOISE MONITORING RESULTS AND GRAPHICAL PRESENTATION


### Appendix G - Noise Monitoring Results

| Location M3 - Cognitio College |       |         |                       |                 |                  |                          |                            |
|--------------------------------|-------|---------|-----------------------|-----------------|------------------|--------------------------|----------------------------|
|                                | Time  | Weather | Unit: dB (A) (30-min) |                 |                  |                          |                            |
| Date                           |       |         | Measured Noise Level  |                 | Background Noise | Construction Noise Level |                            |
|                                |       |         | L <sub>eq</sub>       | L <sub>10</sub> | L 90             | L <sub>eq</sub>          | L <sub>eq</sub>            |
| 16-Jan-17                      | 13:00 | Cloudy  | 64.3                  | 66.0            | 59.8             | 64.0                     | 52.5                       |
| 26-Jan-17                      | 11:30 | Sunny   | 78.3                  | 79.8            | 76.3             | 79.0                     | 78.3 Measured ≤ Background |

| Location M4 - Lee Kau Yan Memorial School |       |         |                       |                 |                |                          |                          |
|-------------------------------------------|-------|---------|-----------------------|-----------------|----------------|--------------------------|--------------------------|
|                                           | Time  | Weather | Unit: dB (A) (30-min) |                 |                |                          |                          |
| Date                                      |       |         | Measured Noise Level  |                 | Baseline Level | Construction Noise Level |                          |
|                                           |       |         | L <sub>eq</sub>       | L <sub>10</sub> | L 90           | L <sub>eq</sub>          | L <sub>eq</sub>          |
| 16-Jan-17                                 | 09:15 | Cloudy  | 65.3                  | 67.1            | 60.9           | 76.7                     | 65.3 Measured ≤ Baseline |
| 26-Jan-17                                 | 09:00 | Sunny   | 73.9                  | 75.2            | 72.3           | / 0./                    | 73.9 Measured ≦ Baseline |

| Location M5(C) - Mercy Grace's Home |       |         |                      |                 |                  |                          |                            |
|-------------------------------------|-------|---------|----------------------|-----------------|------------------|--------------------------|----------------------------|
|                                     | Time  | Weather | Unit: dB (A)         | (30-min)        |                  |                          |                            |
| Date                                |       |         | Measured Noise Level |                 | Background Noise | Construction Noise Level |                            |
|                                     |       |         | L <sub>eq</sub>      | L <sub>10</sub> | L 90             | L <sub>eq</sub>          | L <sub>eq</sub>            |
| 17-Jan-17                           | 13:00 | Sunny   | 77.1                 | 78.8            | 75.1             | 77.1                     | 77.1 Measured ≤ Background |
| 23-Jan-17                           | 12:00 | Sunny   | 73.6                 | 75.4            | 71.3             | 73.4                     | 60.1                       |

MA16043/App G - Noise Cinotech

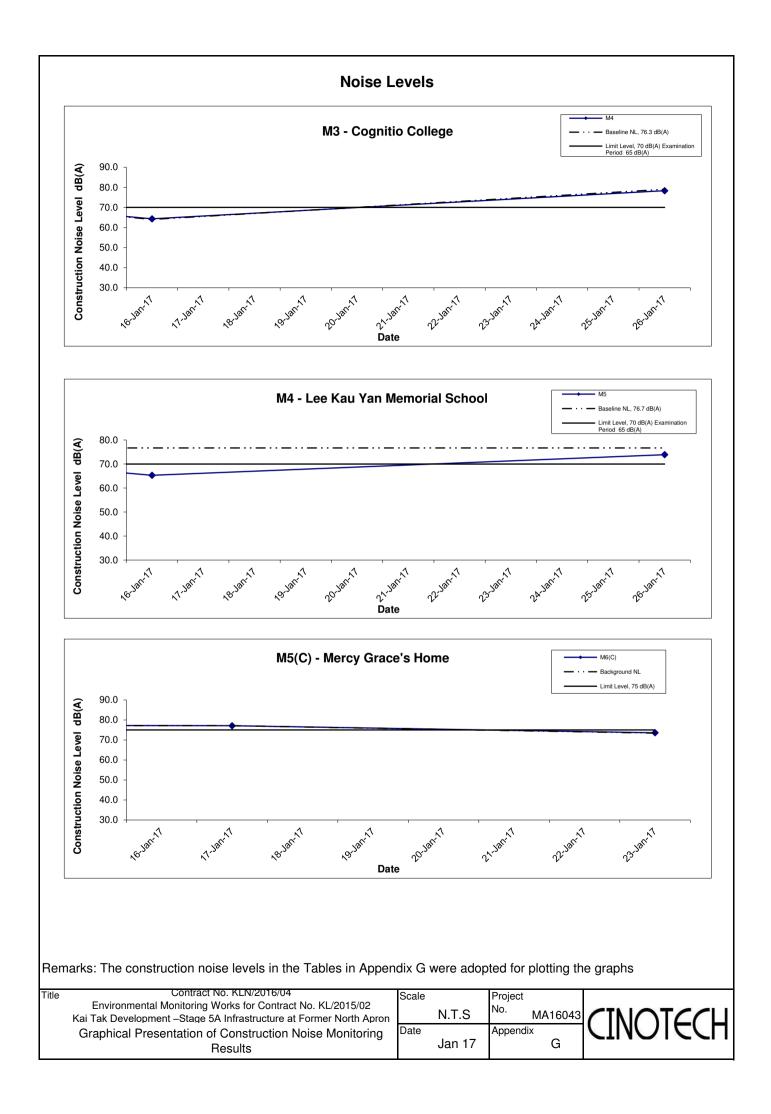

### APPENDIX H SUMMARY OF EXCEEDANCE

## Contract No. KLN/2016/04 Environmental Monitoring Works for Contract No. KL/2015/02 Kai Tak Development – Stage 5A Infrastructure at Former North Apron Area

## Appendix H – Summary of Exceedance

Exceedance Report for Contract No. KL/2015/02

- (A) Exceedance Report for Air Quality (NIL in the reporting month)
- (B) Exceedance Report for Construction Noise (NIL in the reporting month)
- (C) Exceedance Report for Landscape and Visual (NIL in the reporting month)

### APPENDIX I SITE AUDIT SUMMARY

### Contract No. KLN/2016/04 Environmental Monitoring Works for Contract No. KL/2015/02 Kai Tak Development - Stage 5A Infrastructure at Former North Apron Area

## Weekly Site Inspection Record Summary Inspection Information

| Checklist Reference Number | 170120          |
|----------------------------|-----------------|
| Date                       | 20 January 2017 |
| Time                       | 14:00 – 15:30   |

|            |                                                                                | Related  |
|------------|--------------------------------------------------------------------------------|----------|
| Ref. No.   | Non-Compliance                                                                 | Item No. |
|            | None identified                                                                | _        |
|            |                                                                                | Related  |
| Ref. No.   | Remarks/Observations                                                           | Item No. |
|            | B. Water Quality                                                               |          |
|            | No environmental deficiency was identified during site inspection.             |          |
|            |                                                                                |          |
|            | C. Air Quality                                                                 |          |
|            | No environmental deficiency was identified during site inspection.             |          |
|            | D. Noise                                                                       |          |
|            | No environmental deficiency was identified during site inspection.             |          |
|            | E. Waste / Chemical Management                                                 |          |
| 170120-R02 | Drip tray should be provided to the chemical containers placed near Portion 2. | E 9      |
|            | F. Visual and Landscape                                                        |          |
| 170120-O01 | Hoarding should be provided and erected at the site boundary of Portion 1.     | F4       |
|            | G. Permits /Licences                                                           |          |
|            | No environmental deficiency was identified during site inspection.             |          |
|            | H. Others                                                                      |          |
|            | • NIL                                                                          |          |

|             | Name               | Signature | Date            |
|-------------|--------------------|-----------|-----------------|
| Recorded by | KC Chung           | Chy       | 20 January 2017 |
| Checked by  | Dr. Priscilla Choy | UF        | 20 January 2017 |
|             |                    |           |                 |

### Contract No. KLN/2016/04 Environmental Monitoring Works for Contract No. KL/2015/02 Kai Tak Development - Stage 5A Infrastructure at Former North Apron Area

## Weekly Site Inspection Record Summary Inspection Information

| Checklist Reference Number | 170126          |
|----------------------------|-----------------|
| Date                       | 26 January 2017 |
| Time                       | 14:00-15:30     |

|            |                                                                                                                                     | Related  |
|------------|-------------------------------------------------------------------------------------------------------------------------------------|----------|
| Ref. No.   | Non-Compliance                                                                                                                      | Item No. |
| _          | None identified                                                                                                                     | -        |
|            |                                                                                                                                     | Related  |
| Ref. No.   | Remarks/Observations                                                                                                                | Item No. |
|            | B. Water Quality                                                                                                                    |          |
|            | No environmental deficiency was identified during site inspection.                                                                  |          |
|            | C. Air Quality                                                                                                                      |          |
| 170126-O01 | Water spray should be provided to the haul road and exposed area at Portion 2 for dust suppression.                                 | C 5, C 6 |
|            | D. Noise                                                                                                                            |          |
|            | No environmental deficiency was identified during site inspection.                                                                  |          |
|            | E. Waste / Chemical Management                                                                                                      |          |
|            | No environmental deficiency was identified during site inspection.                                                                  |          |
|            | F. Visual and Landscape                                                                                                             |          |
|            | No environmental deficiency was identified during site inspection.                                                                  |          |
|            | G. Permits /Licences                                                                                                                |          |
|            | No environmental deficiency was identified during site inspection.                                                                  |          |
|            | H. Others                                                                                                                           |          |
|            | • Follow-up on previous audit section (Ref. No.: 170120), all environmental deficiencies were improved/rectified by the Contractor. |          |

|             | Name               | Signature | Date            |
|-------------|--------------------|-----------|-----------------|
| Recorded by | KC Chung           |           | 26 January 2017 |
| Checked by  | Dr. Priscilla Choy | WI        | 26 January 2017 |

### APPENDIX J EVENT ACTION PLANS

## **Appendix J - Event Action Plans**

## Event/Action Plan for Air Quality

| EVENT              | ACTION                                     |                                       |                                   |                                      |  |
|--------------------|--------------------------------------------|---------------------------------------|-----------------------------------|--------------------------------------|--|
|                    | ET                                         | IEC                                   | ER                                | CONTRACTOR                           |  |
| Action Level being | Identify source and investigate the        | Check monitoring data submitted       | 1. Notify Contractor.             | Rectify any unacceptable practice;   |  |
| exceeded by        | causes of exceedance;                      | by ET;                                |                                   | 2. Amend working methods if          |  |
| one sampling       | 2. Inform Contactor, IEC and ER;           | 2. Check Contractor's working         |                                   | appropriate.                         |  |
|                    | 3. Repeat measurement to confirm finding.  | method.                               |                                   |                                      |  |
| Action Level being | Identify source and investigate the        | Check monitoring data submitted       | Confirm receipt of notification   | 1. Discuss with ET and IEC on proper |  |
| exceeded by        | causes of exceedance;                      | by ET;                                | of exceedance in writing;         | remedial actions;                    |  |
| two or more        | 2. Inform Contractor, IEC and ER;          | 2. Check Contractor's working         | 2. Notify Contractor;             | 2. Submit proposals for remedial     |  |
| consecutive        | 3. Increase monitoring frequency to daily; | method;                               | 3. In consolidation with the IEC, | actions to ER and IEC within three   |  |
| sampling           | 4. Discuss with IEC and Contractor on      | 3. Discuss with ET and Contractor on  | agree with the Contractor on the  | working days of notification;        |  |
|                    | remedial actions required;                 | possible remedial measures;           | remedial measures to be           | 3. Implement the agreed proposals;   |  |
|                    | 5. Assess the effectiveness of             | 4. Advise the ER on the effectiveness | implemented;                      | 4. Amend proposal if appropriate.    |  |
|                    | Contractor's remedial actions;             | of the proposed remedial measures.    | 4. Supervise implementation of    |                                      |  |
|                    | 6. If exceedance continues, arrange        |                                       | remedial measures;                |                                      |  |
|                    | meeting with IEC and ER;                   |                                       | 5. Conduct meeting with ET and    |                                      |  |
|                    | 7. If exceedance stops, cease additional   |                                       | IEC if exceedance continues.      |                                      |  |
|                    | monitoring.                                |                                       |                                   |                                      |  |
| Limit Level being  | Identify source and investigate the        | Check monitoring data submitted       | Confirm receipt of notification   | Take immediate action to avoid       |  |
| exceeded by        | causes of exceedance;                      | by ET;                                | of exceedance in writing;         | further exceedance;                  |  |
| one sampling       | 2. Inform Contractor, IEC, ER, and EPD;    | 2. Check Contractor's working         | 2. Notify Contractor;             | 2. Discuss with ET and IEC on proper |  |
|                    | 3. Repeat measurement to confirm finding;  | method;                               | 3. In consolidation with the IEC, | remedial actions;                    |  |
|                    | 4. Assess effectiveness of                 | 3. Discuss with ET and Contractor on  | agree with the Contractor on the  | 3. Submit proposals for remedial     |  |
|                    | Contractor's remedial actions and keep     | possible remedial measures;           | remedial measures to be           | actions to ER and IEC within three   |  |

|                   | EPD, IEC and ER informed of               | 4. Advise the ER on the              | implemented;                      | working days of notification;         |
|-------------------|-------------------------------------------|--------------------------------------|-----------------------------------|---------------------------------------|
|                   | the results.                              | effectiveness of the proposed        | 4. Supervise implementation of    | Implement the agreed proposals.       |
|                   | the results.                              | remedial measures.                   | remedial measures;                | 4. Implement the agreed proposals.    |
|                   |                                           | Temediai measures.                   | ·                                 |                                       |
|                   |                                           |                                      | 5. Conduct meeting with ET and    |                                       |
|                   |                                           |                                      | IEC if exceedance continues.      |                                       |
| Limit Level being | 1. Notify IEC, ER, Contractor and         | Check monitoring data submitted      | Confirm receipt of notification   | Take immediate action to avoid        |
| exceeded by       | EPD;                                      | by ET;                               | of exceedance in writing;         | further exceedance;                   |
| two or more       | 2. Repeat measurement to confirm          | 2. Check Contractor's working        | 2. Notify Contractor;             | 2. Discuss with ET, ER and IEC on     |
| consecutive       | findings;                                 | method;                              | 3. In consolidation with the IEC, | proper remedial actions;              |
| sampling          | 3. Carry out analysis of Contractor's     | 3. Discuss amongst ER, ET, and       | agree with the Contractor on the  | 3. Submit proposals for remedial      |
|                   | working procedures to identify source and | Contractor on the potential remedial | remedial measures to be           | actions to IEC within three working   |
|                   | investigate the causes of exceedance;     | actions;                             | implemented;                      | days of notification;                 |
|                   | 4. Increase monitoring frequency to       | 4. Review Contractor's remedial      | 4. Supervise implementation of    | 4. Implement the agreed proposals;    |
|                   | daily;                                    | actions whenever necessary to        | remedial measures;                | 5. Submit further remedial actions if |
|                   | 5. Arrange meeting with IEC, ER           | assure their effectiveness and       | 5. If exceedance continues,       | problem still not under control;      |
|                   | and Contractor to discuss the             | advise the ER accordingly.           | consider stopping the Contractor  | 6. Stop the relevant portion of works |
|                   | remedial actions to be taken;             |                                      | to continue working on that       | as instructed by the ER until the     |
|                   | 6. Assess effectiveness of                |                                      | portion of work which causes the  | exceedance is abated.                 |
|                   | Contractor's remedial actions and         |                                      | exceedance until the              |                                       |
|                   | keep EPD, IEC and ER informed             |                                      | exceedance is abated.             |                                       |
|                   | of the results;                           |                                      |                                   |                                       |
|                   | 7. If exceedance stops, cease additional  |                                      |                                   |                                       |
|                   | monitoring.                               |                                      |                                   |                                       |

#### Event/Action Plan for Construction Noise

| EVENT        | ACTION                                 |                                   |                              |                                   |  |  |
|--------------|----------------------------------------|-----------------------------------|------------------------------|-----------------------------------|--|--|
|              | ET                                     | IEC                               | ER                           | CONTRACTOR                        |  |  |
| Action Level | 1. Notify ER, IEC and Contractor;      | Review the investigation          | 1. Confirm receipt of        | 1. Submit noise mitigation        |  |  |
| being        | 2. Carry out investigation;            | results submitted by the ET;      | notification of failure in   | proposals to IEC and ER;          |  |  |
| exceeded     | 3. Report the results of investigation | 2. Review the proposed remedial   | writing;                     | 2. Implement noise mitigation     |  |  |
|              | to the IEC, ER and Contractor;         | measures by the Contractor and    | 2. Notify Contractor;        | proposals.                        |  |  |
|              | 4. Discuss with the IEC and            | advise the ER accordingly;        | 3. In consolidation with the | (The above actions should be      |  |  |
|              | Contractor on remedial measures        | 3. Advise the ER on the           | IEC, agree with the          | taken within 2 working days after |  |  |
|              | required;                              | effectiveness of the proposed     | Contractor on the remedial   | the exceedance is identified)     |  |  |
|              | 5. Increase monitoring frequency to    | remedial measures.                | measures to be implemented;  |                                   |  |  |
|              | check mitigation effectiveness.        | (The above actions should be      | 4. Supervise the             |                                   |  |  |
|              | (The above actions should be taken     | taken within 2 working days after | implementation of remedial   |                                   |  |  |
|              | within 2 working days after the        | the exceedance is identified)     | measures.                    |                                   |  |  |
|              | exceedance is identified)              |                                   | (The above actions should be |                                   |  |  |
|              |                                        |                                   | taken within 2 working days  |                                   |  |  |
|              |                                        |                                   | after the exceedance is      |                                   |  |  |
|              |                                        |                                   | identified)                  |                                   |  |  |
| Limit Level  | 1. Inform IEC, ER, Contractor and      | 1. Discuss amongst ER, ET, and    | 1. Confirm receipt of        | 1. Take immediate action to       |  |  |
| being        | EPD;                                   | Contractor on the potential       | notification of failure in   | avoid further exceedance;         |  |  |
| exceeded     | 2. Repeat measurements to confirm      | remedial actions;                 | writing;                     | 2. Submit proposals for remedial  |  |  |
|              | findings;                              | 2. Review Contractor's remedial   | 2. Notify Contractor;        | actions to IEC and ER within 3    |  |  |
|              | 3. Increase monitoring frequency;      | actions whenever necessary to     | 3. In consolidation with the | working days of notification;     |  |  |
|              | 4. Identify source and investigate the | assure their effectiveness and    | IEC, agree with the          | 3. Implement the agreed           |  |  |
|              | cause of exceedance;                   | advise the ER accordingly.        | Contractor on the remedial   | proposals;                        |  |  |

| 5. Carry out analysis of Contractor's | (The above actions should be      | measures to be implemented;  | 4. Submit further proposal if     |
|---------------------------------------|-----------------------------------|------------------------------|-----------------------------------|
| working procedures;                   | taken within 2 working days after | 4. Supervise the             | problem still not under control;  |
| 6. Discuss with the IEC, Contractor   | the exceedance is identified)     | implementation of remedial   | 5. Stop the relevant portion of   |
| and ER on remedial measures           |                                   | measures;                    | works as instructed by the ER     |
| required;                             |                                   | 5. If exceedance continues,  | until the exceedance is abated.   |
| 7. Assess effectiveness of            |                                   | consider stopping the        | (The above actions should be      |
| Contractor's remedial actions and     |                                   | Contractor to continue       | taken within 2 working days after |
| keep IEC, EPD and ER informed of      |                                   | working on that portion of   | the exceedance is identified)     |
| the results;                          |                                   | work which causes the        |                                   |
| 8. If exceedance stops, cease         |                                   | exceedance until the         |                                   |
| additional monitoring.                |                                   | exceedance is abated.        |                                   |
| (The above actions should be taken    |                                   | (The above actions should be |                                   |
| within 2 working days after the       |                                   | taken within 2 working days  |                                   |
| exceedance is identified)             |                                   | after the exceedance is      |                                   |
|                                       |                                   | identified)                  |                                   |

# Event/Action Plan for Landscape and Visual

| EVENT                          | ACTION              |                         |                                          |                         |  |  |
|--------------------------------|---------------------|-------------------------|------------------------------------------|-------------------------|--|--|
| ACTION<br>LEVEL                | ET                  | IEC                     | ER                                       | CONTRACTOR              |  |  |
| Design Check                   | 1. Check final      | 1. Check report.        | Undertake remedial design if necessary   |                         |  |  |
|                                | design conforms to  | 2. Recommend            |                                          |                         |  |  |
|                                | the requirements    | remedial design if      |                                          |                         |  |  |
|                                | of EP and prepare   | necessary               |                                          |                         |  |  |
|                                | report.             |                         |                                          |                         |  |  |
| Non-conformity on one occasion | 1. Identify Source  | 1. Check report         | Notify Contractor                        | Amend working methods   |  |  |
|                                | 2. Inform IEC and   | 2. Check Contractor's   | 2. Ensure remedial measures are properly | 2. Rectify damage and   |  |  |
|                                | ER                  | working method          | implemented                              | undertake any necessary |  |  |
|                                | 3. Discuss remedial | 3. Discuss with ET and  |                                          | replacement             |  |  |
|                                | actions with IEC,   | Contractor on possible  |                                          |                         |  |  |
|                                | ER and Contractor   | remedial measures       |                                          |                         |  |  |
|                                | 4. Monitor remedial | 4. Advise ER on         |                                          |                         |  |  |
|                                | actions until       | effectiveness of        |                                          |                         |  |  |
|                                | rectification has   | proposed remedial       |                                          |                         |  |  |
|                                | been completed      | measures.               |                                          |                         |  |  |
|                                |                     | 5. Check implementation |                                          |                         |  |  |
|                                |                     | of remedial measures.   |                                          |                         |  |  |
| Repeated Non-conformity        | 1. Identify Source  | 1. Check monitoring     | 1. Notify Contractor                     | Amend working methods   |  |  |
|                                | Inform IEC and      | report                  | 2. Ensure remedial measures are properly | 2. Rectify damage and   |  |  |

| E   | ER                   | 2. Check Contractor's  | implemented | undertake any necessary |
|-----|----------------------|------------------------|-------------|-------------------------|
| 2   | 2. Increase          | working method         |             | replacement             |
| r   | monitoring           | 3. Discuss with ET and |             |                         |
| f   | frequency            | Contractor on possible |             |                         |
| 3   | 3. Discuss remedial  | remedial measures      |             |                         |
| 8   | actions with IEC,    | 4. Advise ER on        |             |                         |
| E   | ER and Contractor    | effectiveness of       |             |                         |
| 4   | 4. Monitor remedial  | proposed remedial      |             |                         |
| 8   | actions until        | measures               |             |                         |
| r   | rectification has    | 5. Supervise           |             |                         |
| l t | been completed       | implementation of      |             |                         |
| 5   | 5. If non-conformity | remedial measures.     |             |                         |
|     | stops, cease         |                        |             |                         |
| a   | additional           |                        |             |                         |
| r   | monitoring           |                        |             |                         |

APPENDIX K ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE (EMIS)

## ${\bf Appendix} \; {\bf K-Summary} \; {\bf of} \; {\bf Implementation} \; {\bf Schedule} \; {\bf of} \; {\bf Mitigation} \; {\bf Measures} \; {\bf for} \; {\bf Construction} \; {\bf Phase}$

| EIA Ref. | Pagemented Mitigation Magazza                                                                                                            | Implementation |
|----------|------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| EIA Rei. | Recommended Mitigation Measures                                                                                                          | Status         |
| Construc | ction Air Quality                                                                                                                        |                |
| S6.5     | 8 times daily watering of the work site with active dust emitting activities.                                                            | ٨              |
| S6.8     | Implementation of dust suppression measures stipulated in Air Pollution Control (Construction Dust) Regulation. The following mitigation |                |
|          | measures, good site practices and a comprehensive dust monitoring and audit programme are recommended to minimize cumulative             |                |
|          | dust impacts.                                                                                                                            |                |
|          | Stockpiling site(s) should be lined with impermeable sheeting and bunded. Stockpiles should be fully covered by impermeable              | ٨              |
|          | sheeting to reduce dust emission.                                                                                                        |                |
|          | Misting for the dusty material should be carried out before being loaded into the vehicle. Any vehicle with an open load carrying        | ٨              |
|          | area should have properly fitted side and tail boards.                                                                                   |                |
|          | Material having the potential to create dust should not be loaded from a level higher than the side and tail boards and should be        | ٨              |
|          | dampened and covered by a clean tarpaulin.                                                                                               |                |
|          | The tarpaulin should be properly secured and should extent at least 300 mm over the edges of the sides and tailboards. The               | ٨              |
|          | material should also be dampened if necessary before transportation.                                                                     |                |
|          | The vehicles should be restricted to maximum speed of 10 km per hour and confined haulage and delivery vehicle to designated             | ٨              |
|          | roadways insider the site. Onsite unpaved roads should be compacted and kept free of lose materials.                                     |                |
|          | Vehicle washing facilities should be provided at every vehicle exit point.                                                               | ٨              |
|          | The area where vehicle washing takes place and the section of the road between the washing facilities and the exit point should          | ٨              |
|          | be paved with concrete, bituminous materials or hardcores.                                                                               |                |
|          | Every main haul road should be scaled with concrete and kept clear of dusty materials or sprayed with water so as to maintain            | *              |
|          | the entire road surface wet.                                                                                                             |                |
|          | Every stock of more than 20 bags of cement should be covered entirely by impervious sheeting placed in an area sheltered on              | ٨              |
|          | the top and the three sides.                                                                                                             |                |
|          | Every vehicle should be washed to remove any dusty materials from its body and wheels before leaving the construction sites.             | Λ              |

| S6.8 | • | DWFI compound for JVBC:                                                                                                                    | N/A |
|------|---|--------------------------------------------------------------------------------------------------------------------------------------------|-----|
|      |   | A DWFI compound is proposed at the downstream of JVC to contain pollution in drainage systems entering the KTAC and KTTS                   |     |
|      |   | by interception facilities until the ultimate removal of the pollution sources. Tidal barriers and desiliting facilities will form part of |     |
|      |   | the compounds to prevent any accumulation of sediment within the downstream section of JVBC and hence fully mitigate the                   |     |
|      |   | potential odour emissions from the headspace of JVBC near the existing discharge locations. The odour generating operations                |     |
|      |   | within the proposed desilting compound will be fully enclosed and the odorous air will be collected and treated by high efficiency         |     |
|      |   | deodorizers before discharge to the atmosphere.                                                                                            |     |
|      | • | Desilting compound for KTN:                                                                                                                | N/A |
|      |   | Two desilting compounds are proposed for KTN (at Site 1D6 and Site 1P1) to contain pollution in drainage systems entering the              |     |
|      |   | KTAC and KTTS by interception facilities until the ultimate removal of the pollution sources. Tidal barriers and desiliting facilities     |     |
|      |   | will form part of the compounds to prevent any accumulation of sediment within the downstream section of KTN and hence fully               |     |
|      |   | mitigate the potential odour emissions from the headspace of KTN near the existing discharge locations. The odour generating               |     |
|      |   | operations within the proposed desilting compound will be fully enclosed and the odorous air will be collected and treated by high         |     |
|      |   | efficiency deodorizers before discharge to the atmosphere.                                                                                 |     |
|      | • | Decking or reconstruction of KTN within apron area:                                                                                        | N/A |
|      |   | It is proposed to deck the KTN or reconstruct the KTN within the former Apron area into Kai Tak River from the south of Road D1            |     |
|      |   | to the north of Road D2 along the existing alignment of KTN. The Kai Tak River will compose of a number of channels flowing with           |     |
|      |   | nonodorous fresh water and THEES effluent. The channel flowing with THEES effluent will be designed with the width of water                |     |
|      |   | surface of not more than 16m.                                                                                                              |     |
|      |   | Localised maintenance dredging:                                                                                                            | N/A |
|      |   | Localised maintenance dredging should be conducted to provide water depth of not less than 3.5m over the whole of KTAC and                 |     |
|      |   | KTTS. With reference to the water depth data recorded during the odour survey, only some of the areas in the northern part of              |     |
|      |   | KTAC (i.e. to the north of taxiway bridge) including the area near the northern edge of KTAC, the area near western bank of                |     |
|      |   | KTAC, and the area near the JVC discharge have water depths shallower than 3.5m. The area involved would be about 40% of                   |     |
|      |   | the northern KTAC and the dredging depth required would be from about 2.7m to less than 1m. The maintenance dredging to be                 |     |
|      |   | carried out prior to the occupation of any new development in the immediate vicinity of KTAC to avoid potential localized odour            |     |

|         | impacts at the future ASRs during the maintenance dredging operation.                                                             |     |
|---------|-----------------------------------------------------------------------------------------------------------------------------------|-----|
|         | Improvement of water circulation in KTAC and KTTS:                                                                                | N/A |
|         | 600m gap opening at the northern part of the former Kai Tak runway, the water circulation in KTAC and KTTS would be               |     |
|         | substantially improved. Together with the improvement in water circulation, the DO level in KTAC and KTTS would also be           |     |
|         | increased.                                                                                                                        |     |
|         | In-situ sediment treatment by bioremediation:                                                                                     | N/A |
|         | Bioremediation would be applied to the entire KTAC and KTTS.                                                                      |     |
| Constru | uction Noise                                                                                                                      |     |
| S7.8    | Use of quiet PME, movable barriers barrier for Asphalt Paver, Breaker, Excavator and Hand-held breaker and full enclosure for Air | ۸   |
|         | Compressor, Bar Bender, Concrete Pump, Generator and Water Pump.                                                                  |     |
| S7.9    | Good Site Practice:                                                                                                               |     |
|         | Only well-maintained plant should be operated on-site and plant should be serviced regularly during the construction program.     | ۸   |
|         | Silencers or mufflers on construction equipment should be utilized and should be properly maintained during the construction      | ۸   |
|         | program.                                                                                                                          |     |
|         | Mobile plant, if any, should be sited as far away from NSRs as possible.                                                          | ۸   |
|         | Machines and plant (such as trucks) that may be in intermittent use should be shut down between works periods or should be        | ۸   |
|         | throttled down to a minimum.                                                                                                      |     |
|         | Plant known to emit noise strongly in one direction should, wherever possible, be orientated so that the noise is directed away   | ۸   |
|         | from the nearby NSRs.                                                                                                             |     |
|         | Material stockpiles and other structures should be effectively utilized, wherever practicable, in screening noise from on-site    | ۸   |
|         | construction activities.                                                                                                          |     |
| S7.9    | Scheduling of Construction Works during School Examination Period                                                                 | ۸   |
| S7.8    | (i) Provision of low noise surfacing in a section of Road L2; and                                                                 | N/A |
|         | (ii) Provision of structural fins                                                                                                 | N/A |
| S7.8    | (i) Avoid the sensitive façade of class room facing Road L2 and L4; and                                                           | N/A |
|         | (ii) Provision of low noise surfacing in a section of Road L2 & L4                                                                | N/A |
|         |                                                                                                                                   |     |

| S7.8    | (i)      | Provision of low noise surfacing in a section of Road L4 before occupation of Site 1I1; and                                     | N/A |
|---------|----------|---------------------------------------------------------------------------------------------------------------------------------|-----|
|         | (ii)     | Setback of building about 5m from site boundary.                                                                                | N/A |
| S7.8    | Setbac   | ck of building about 35m to the northwest direction at 1L3 and 5m at Site 1L2.                                                  | N/A |
| S7.8    | (i)      | avoid any sensitive façades with openable window facing the existing Kowloon City Road network; and Avoid the sensitive         | N/A |
|         |          | façade of class room facing Road L2 and L4; and                                                                                 |     |
|         | (ii)     | for the sensitive facades facing the To Kwa Wan direction, either setback the facades by about 5m to the northeast direction or | N/A |
|         |          | do not provide the facades with openable window.                                                                                |     |
| S7.8    | (i)      | avoid any sensitive facades with openable window facing the existing To Kwa Wan Road or                                         | N/A |
|         | (ii)     | provision of 17.5m high noise tolerant building fronting To Kwa Wan Road and restrict the height of the residential block(s)    | N/A |
|         |          | located at less than 55m away from To Kwa Wan Road to no more than 25m above ground                                             |     |
| S7.8    | (i)      | avoid any sensitive facades with openable window facing the slip road connecting Prince Edward Road East and San Po             | ٨   |
|         |          | Kong or other alternative mitigation measures and at-source mitigation measures for the surrounding new local roads to          |     |
|         |          | minimise the potential traffic noise impacts from the slip road                                                                 |     |
| S7.8    | All the  | ventilation fans installed in the below will be provided with silencers or acoustics treatment.                                 |     |
|         | (i)      | SPS                                                                                                                             | N/A |
|         | (ii)     | ESS                                                                                                                             | N/A |
|         | (iii)    | Tunnel Ventilation Shaft                                                                                                        | N/A |
|         | (iv)     | EFTS depot                                                                                                                      | N/A |
| S7.8    | Installa | ation of retractable roof or other equivalent measures                                                                          | N/A |
| Constru | uction V | Vater Quality                                                                                                                   |     |
| S8.8    | The fo   | llowing mitigation measures are proposed to be incorporated in the design of the SPS at KTD, including:                         |     |
|         |          | Dual power supply or emergency generator should be provided at all the SPSs to secure electrical power supply;                  | N/A |
|         |          | Standby pumps should be provided at all SPSs to ensure smooth operation of the SPS during maintenance of the duty               | N/A |
|         |          | pumps;                                                                                                                          |     |
|         |          | An alarm should be installed to signal emergency high water level in the wet well at all SPSs; and                              | N/A |

|      | For all unmanned SPSs, a remote monitor system connecting SPSs with the control station through telemetry system should                                                      | N/A |
|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|
|      | be provided so that swift actions could be taken in case of malfunction of unmanned facilities                                                                               |     |
| S8.8 | Construction Phase                                                                                                                                                           |     |
|      | Marine-based Construction                                                                                                                                                    |     |
|      | Capital and Maintenance Dredging for Cruise Terminal                                                                                                                         |     |
|      | Mitigation measures for construction of the proposed cruise terminal should follow those recommended in the approved EIA for CT Dredging.                                    | N/A |
| S8.8 | Fireboat Berth, Runway Opening and Road T2                                                                                                                                   |     |
|      | Silt curtains should be deployed around the close grab dredger to minimize release of sediment and other contaminants for any dredging and filling activities in open water. | N/A |
| S8.8 | Dredging at and near the seawall area for construction of the public landing steps cum fireboat berth should be carried out at a                                             | N/A |
|      | maximum production rate of 1,000m³ per day using one grab dredger.                                                                                                           |     |
| S8.8 | The proposed construction method for runway opening should adopt an approach where the existing seawall at the runway will not be                                            | N/A |
|      | removed until completion of all excavation and dredging works for demolition of the runway. Thus, excavation of bulk fill and majority of                                    |     |
|      | the dredging works will be carried out behind the existing seawall, and the sediment plume can be effectively contained within the works                                     |     |
|      | area. As there is likely some accumulation of sediments alongside the runway, there will be a need to dredge the existing seabed after                                       |     |
|      | completion of all the demolition works. Dredging alongside the 600m opening should be carried out at a maximum production rate of                                            |     |
|      | 2,000m³ per day using one grab dredger.                                                                                                                                      |     |
| 8.8  | Dredging for Road T2 should be conducted at a maximum rate of 8,000m³ per day (using four grab dredgers) whereas the sand filling                                            | N/A |
|      | should be conducted at a maximum rate of 2,000m3 per day (using two grab dredgers).                                                                                          |     |
| 8.8  | Silt screens shall be applied to seawater intakes at WSD seawater intake.                                                                                                    | N/A |

| S8.8 | Land-based Construction                                                                                                                     |   |
|------|---------------------------------------------------------------------------------------------------------------------------------------------|---|
|      | Construction Runoff                                                                                                                         |   |
|      | Exposed soil areas should be minimised to reduce the potential for increased siltation, contamination of runoff, and erosion.               |   |
|      | Construction runoff related impacts associated with the above ground construction activities can be readily controlled through the use of   |   |
|      | appropriate mitigation measures which include:                                                                                              |   |
|      | use of sediment traps                                                                                                                       | ۸ |
|      | adequate maintenance of drainage systems to prevent flooding and overflow                                                                   | ۸ |
| S8.8 | Ideally, construction works should be programmed to minimise surface excavation works during the rainy season (April to September).         | ۸ |
|      | All exposed earth areas should be completed as soon as possible after earthworks have been completed, or alternatively, within 14 days      |   |
|      | of the cessation of earthworks where practicable. If excavation of soil cannot be avoided during the rainy season, or at any time of year   |   |
|      | when rainstorms are likely, exposed slope surfaces should be covered by tarpaulin or other means.                                           |   |
| S8.8 | Construction site should be provided with adequately designed perimeter channel and pre-treatment facilities and proper maintenance.        | ۸ |
|      | The boundaries of critical areas of earthworks should be marked and surrounded by dykes or embankments for flood protection.                |   |
|      | Temporary ditches should be provided to facilitate runoff discharge into the appropriate watercourses, via a silt retention pond.           |   |
|      | Permanent drainage channels should incorporate sediment basins or traps and baffles to enhance deposition rates. The design of              |   |
|      | efficient silt removal facilities should be based on the guidelines in Appendix A1 of ProPECC PN 1/94.                                      |   |
| S8.8 | Sediment tanks of sufficient capacity, constructed from pre-formed individual cells of approximately 6 to 8 m³ capacity, are                | ۸ |
|      | recommended as a general mitigation measure which can be used for settling surface runoff prior to disposal. The system capacity is         |   |
|      | flexible and able to handle multiple inputs from a variety of sources and particularly suited to applications where the influent is pumped. |   |
| S8.8 | Open stockpiles of construction materials (for examples, aggregates, sand and fill material) of more than 50 m³ should be covered with      | ۸ |
|      | tarpaulin or similar fabric during rainstorms. Measures should be taken to prevent the washing away of construction materials, soil, silt   |   |
|      | or debris into any drainage system.                                                                                                         |   |
| S8.8 | Manholes (including newly constructed ones) should always be adequately covered and temporarily sealed so as to prevent silt,               | ۸ |
|      | construction materials or debris being washed into the drainage system and storm runoff being directed into foul sewers.                    |   |
| S8.8 | Precautions to be taken at any time of year when rainstorms are likely, actions to be taken when a rainstorm is imminent or forecast, and   | ۸ |
|      | actions to be taken during or after rainstorms are summarised in Appendix A2 of ProPECC PN 1/94. Particular attention should be paid        |   |

|      | to the control of silty surface runoff during storm events.                                                                                     |        |
|------|-------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| S8.8 | Oil interceptors should be provided in the drainage system and regularly cleaned to prevent the release of oils and grease into the storm       | N/A(1) |
|      | water drainage system after accidental spillages. The interceptor should have a bypass to prevent flushing during periods of heavy rain.        |        |
| S8.8 | All vehicles and plant should be cleaned before leaving a construction site to ensure no earth, mud, debris and the like is deposited by        | ٨      |
|      | them on roads. An adequately designed and located wheel washing bay should be provided at every site exit, and wash-water should                |        |
|      | have sand and silt settled out and removed at least on a weekly basis to ensure the continued efficiency of the process. The section of         |        |
|      | access road leading to, and exiting from, the wheel-wash bay to the public road should be paved with sufficient backfall toward the             |        |
|      | wheel-wash bay to prevent vehicle tracking of soil and silty water to public roads and drains.                                                  |        |
| S8.8 | Drainage                                                                                                                                        |        |
|      |                                                                                                                                                 |        |
|      | It is recommended that on-site drainage system should be installed prior to the commencement of other construction activities.                  | ۸      |
|      | Sediment traps should be installed in order to minimise the sediment loading of the effluent prior to discharge into foul sewers. There         |        |
|      | should be no direct discharge of effluent from the site into the sea                                                                            |        |
| S8.8 | All temporary and permanent drainage pipes and culverts provided to facilitate runoff discharge should be adequately designed for the           | ٨      |
|      | controlled release of storm flows. All sediment control measures should be regularly inspected and maintained to ensure proper and              |        |
|      | efficient operation at all times and particularly following rain storms. The temporarily diverted drainage should be reinstated to its original |        |
|      | condition when the construction work has finished or the temporary diversion is no longer required.                                             |        |
| S8.8 | All fuel tanks and storage areas should be provided with locks and be located on sealed areas, within bunds of a capacity equal to 110%         | ۸      |
|      | of the storage capacity of the largest tank, to prevent spilled fuel oils from reaching the coastal waters of the Victoria Harbour WCZ.         |        |
| S8.8 | Sewage Effluent                                                                                                                                 |        |
|      |                                                                                                                                                 |        |
|      | Construction work force sewage discharges on site are expected to be connected to the existing trunk sewer or sewage treatment                  | ۸      |
|      | facilities. The construction sewage may need to be handled by portable chemical toilets prior to the commission of the on-site sewer            |        |
|      | system. Appropriate numbers of portable toilets should be provided by a licensed contractor to serve the large number of construction           |        |
|      | workers over the construction site. The Contractor should also be responsible for waste disposal and maintenance practices.                     |        |
|      |                                                                                                                                                 | 1      |

## ${\bf Appendix} \; {\bf K-Summary} \; {\bf of} \; {\bf Implementation} \; {\bf Schedule} \; {\bf of} \; {\bf Mitigation} \; {\bf Measures} \; {\bf for} \; {\bf Construction} \; {\bf Phase}$

| S8.8 | Stormwater Discharges                                                                                                                                                                                                                                                                              |     |
|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|
|      | Minimum distances of 100 m should be maintained between the existing or planned stormwater discharges and the existing or planned seawater intakes                                                                                                                                                 | ^   |
| S8.8 | Debris and Litter                                                                                                                                                                                                                                                                                  |     |
|      | In order to maintain water quality in acceptable conditions with regard to aesthetic quality, contractors should be required, under conditions of contract, to ensure that site management is optimised and that disposal of any solid materials, litter or wastes to marine waters does not occur | ۸   |
| S8.8 | Construction Works at or in Close Proximity of Storm Culvert or Seafront                                                                                                                                                                                                                           |     |
|      | The proposed works should preferably be carried out within the dry season where the flow in the drainage channel /storm culvert/ nullah is low.                                                                                                                                                    | ^   |
| S8.8 | The use of less or smaller construction plants may be specified to reduce the disturbance to the bottom sediment at the drainage channel /storm culvert / nullah.                                                                                                                                  | ۸   |
| S8.8 | Temporary storage of materials (e.g. equipment, filling materials, chemicals and fuel) and temporary stockpile of construction materials should be located well away from any water courses during carrying out of the construction works                                                          | Λ   |
| S8.8 | Stockpiling of construction materials and dusty materials should be covered and located away from any water courses.                                                                                                                                                                               | ٨   |
| S8.8 | Construction debris and spoil should be covered up and/or disposed of as soon as possible to avoid being washed into the nearby water receivers.                                                                                                                                                   | Λ   |
| S8.8 | Construction activities, which generate large amount of wastewater, should be carried out in a distance away from the waterfront, where practicable.                                                                                                                                               | ۸   |
| S8.8 | Mitigation measures to control site runoff from entering the nearby water environment should be implemented to minimize water quality impacts. Surface channels should be provided along the edge of the waterfront within the work sites to intercept the runoff.                                 | ۸   |
| S8.8 | Construction effluent, site run-off and sewage should be properly collected and/or treated.                                                                                                                                                                                                        | ۸   |
| S8.8 | Any works site inside the storm water courses should be temporarily isolated, such as by placing of sandbags or silt curtains with lead                                                                                                                                                            | N/A |

|         | edge at bottom and properly supported props to prevent adverse impact on the storm water quality.                                             |     |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------|-----|
| S8.8    | Silt curtain may be installed around the construction activities at the seafront to minimize the potential impacts due to accidental spillage | N/A |
|         | of construction materials.                                                                                                                    |     |
| S8.8    | Proper shoring may need to be erected in order to prevent soil/mud from slipping into the storm culvert/drainage channel/sea.                 | N/A |
| S8.8    | Supervisory staff should be assigned to station on site to closely supervise and monitor the works                                            | ۸   |
| S8.8    | Marine water quality monitoring and audit programme shall be implemented for the proposed sediment treatment operation.                       | N/A |
| Constru | uction Waste Management                                                                                                                       |     |
| S9.5    | Good Site Practices                                                                                                                           |     |
|         | It is not anticipated that adverse waste management related impacts would arise, provided that good site practices are adhered to.            |     |
|         | Recommendations for good site practices during the dredging activities include:                                                               |     |
|         | Nomination of an approved person, such as a site manager, be responsible for good site practices, arrangements for collection                 | ۸   |
|         | and effective disposal to an appropriate facility, of all wastes generated at the site.                                                       |     |
|         | Training of site personnel in proper waste management and chemical waste handling procedures.                                                 | ۸   |
|         | Provision of sufficient waste disposal points and regular collection for disposal.                                                            | ۸   |
|         | Appropriate measure to minimize windblown litter and dust during transportation of waste by either covering trucks or by                      | ۸   |
|         | transporting wastes in enclosed containers.                                                                                                   |     |
|         | A recording system for the amount of wastes generated, recycled and disposed of (including the disposal sites).                               | ۸   |
| S9.5    | Waste Reduction Measures                                                                                                                      |     |
|         | Good management and control can prevent the generation of a significant amount of waste. Waste reduction is best achieved at the              |     |
|         | planning and design stage, as well as by ensuring the implementation of good site practices. Recommendations to achieve waste                 |     |
|         | reduction include:                                                                                                                            |     |
|         | Sort C&D waste from demolition of the remaining structures to recover recyclable portions such as metals                                      | ٨   |
|         | Segregation and storage of different types of waste in different containers, skips or stockpiles to enhance reuse or recycling of             | ٨   |
|         | materials and their proper disposal                                                                                                           |     |
|         | Encourage collection of aluminium cans, PET bottles and paper by providing separate labelled bins to enable these wastes to be                | ۸   |
|         | segregated from other general refuse generated by the work force                                                                              |     |

|      | Any unused chemicals or those with remaining functional capacity should be recycled                                                            | ۸   |
|------|------------------------------------------------------------------------------------------------------------------------------------------------|-----|
|      |                                                                                                                                                | ۸   |
|      | Proper storage and site practices to minimise the potential for damage or contamination of construction materials                              | ٨   |
| S9.5 | Dredged Marine Sediment                                                                                                                        |     |
|      |                                                                                                                                                |     |
|      | The basic requirements and procedures for dredged mud disposal are specified under the ETWB TCW No. 34/2002. The management                    | N/A |
|      | of the dredging, use and disposal of marine mud is monitored by the MFC, while the licensing of marine dumping is required under the           |     |
|      | Dumping at Sea Ordinance and is the responsibility of the Director of Environmental Protection (DEP)                                           |     |
| S9.5 | The dredged marine sediments would be loaded onto barges and transported to the designated disposal sites allocated by the MFC                 | N/A |
|      | depending on their level of contamination. Sediment classified as Category L would be suitable for Type 1 - Open Sea Disposal.                 |     |
|      | Contaminated sediment would require either Type 1 – Open Sea Disposal (Dedicated Sites), Type 2 - Confined Marine Disposal, or                 |     |
|      | Type 3 – Special Treatment / Disposal and must be dredged and transported with great care in accordance with ETWB TCW No.                      |     |
|      | 34/2002. Subject to the final allocation of the disposal sites by MFC, the dredged contaminated sediment must be effectively isolated          |     |
|      | from the environment and disposed properly at the designated disposal site                                                                     |     |
| S9.5 | It will be the responsibility of the contractor to satisfy the appropriate authorities that the contamination levels of the marine sediment to |     |
|      | be dredged have been analysed and recorded. According to the ETWB TCW No. 34/2002, this will involve the submission of a formal                |     |
|      | Sediment Quality Report to the DEP, prior to the dredging contract being tendered. The contractor for the dredging works should apply          |     |
|      | for allocation of marine disposal sites and all necessary permits from relevant authorities for the disposal of dredged sediment. During       |     |
|      | transportation and disposal of the dredged marine sediments requiring Type 1, Type 2, or Type 3 disposal, the following measures               |     |
|      | should be taken to minimise potential impacts on water quality:                                                                                |     |
|      | Bottom opening of barges should be fitted with tight fitting seals to prevent leakage of material. Excess material should be                   | N/A |
|      | cleaned from the decks and exposed fittings of barges and hopper dredgers before the vessel is moved                                           |     |
|      | Monitoring of the barge loading should be conducted to ensure that loss of material does not take place during transportation.                 | N/A |
|      | Transport barges or vessels should be equipped with automatic selfmonitoring devices as required under the Dumping at Sea                      |     |
|      | Ordinance and as specified by the DEP                                                                                                          |     |
|      | Barges or hopper barges should not be filled to a level that would cause the overflow of materials or sediment laden water during              | N/A |
|      | loading or transportation                                                                                                                      |     |
|      |                                                                                                                                                |     |

| S9.5 | Construction and Demolition Material                                                                                                            |   |
|------|-------------------------------------------------------------------------------------------------------------------------------------------------|---|
|      | Mitigation measures and good site practices should be incorporated into contract document to control potential environmental impact             |   |
|      | from handling and transportation of C&D material. The mitigation measures include:                                                              |   |
|      | Where it is unavoidable to have transient stockpiles of C&D material within the Project work site pending collection for disposal,              | ۸ |
|      | the transient stockpiles should be located away from waterfront or storm drains as far as possible                                              |   |
|      | Open stockpiles of construction materials or construction wastes on-site should be covered with tarpaulin or similar fabric                     | ۸ |
|      | Skip hoist for material transport should be totally enclosed by impervious sheeting                                                             | ۸ |
|      | Every vehicle should be washed to remove any dusty materials from its body and wheels before leaving a construction site                        | ۸ |
|      | The area where vehicle washing takes place and the section of the road between the washing facilities and the exit point should                 | ۸ |
|      | be paved with concrete, bituminous materials or hardcores                                                                                       |   |
|      | The load of dusty materials carried by vehicle leaving a construction site should be covered entirely by clean impervious sheeting              | ٨ |
|      | to ensure dust materials do not leak from the vehicle                                                                                           |   |
|      | All dusty materials should be sprayed with water prior to any loading, unloading or transfer operation so as to maintain the dusty              | ۸ |
|      | materials wet                                                                                                                                   |   |
|      | The height from which excavated materials are dropped should be controlled to a minimum practical height to limit fugitive dust                 | ۸ |
|      | generation from unloading                                                                                                                       |   |
|      |                                                                                                                                                 |   |
|      | When delivering inert C&D material to public fill reception facilities, the material should consist entirely of inert construction waste and of | ۸ |
|      | size less than 250mm or other sizes as agreed with the Secretary of the Public Fill Committee. In order to monitor the disposal of the          |   |
|      | surplus C&D material at the designed public fill reception facility and to control fly tipping, a trip-ticket system as stipulated in the ETWB  |   |
|      | TCW No. 31/2004 "Trip Ticket System for Disposal of Construction and Demolition Materials" should be included as one of the                     |   |
|      | contractual requirements and implemented by an Environmental Team undertaking the Environmental Monitoring and Audit work. An                   |   |
|      | Independent Environmental Checker should be responsible for auditing the results of the system.                                                 |   |

| S9.5    | Chemica   | l Waste                                                                                                                                                                                                                                                      |        |
|---------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
|         |           | e, chemical wastes (for example, cleaning fluids, solvents, lubrication oil and fuel) should be handled according to the Code of on the Packaging, Labelling and Storage of Chemical Wastes. Spent chemicals should be collected by a licensed collector for | *      |
|         | disposal  | at the CWTF or other licensed facility, in accordance with the Waste Disposal (Chemical Waste) (General) Regulation                                                                                                                                          |        |
| S9.5    | General   | Refuse                                                                                                                                                                                                                                                       |        |
|         |           |                                                                                                                                                                                                                                                              |        |
|         | General   | refuse should be stored in enclosed bins or compaction units separate from C&D material. A licensed waste collector should be                                                                                                                                | ۸      |
|         | employe   | d by the contractor to remove general refuse from the site, separately from C&D material. Effective collection and storage                                                                                                                                   |        |
|         | methods   | (including enclosed and covered area) of site wastes would be required to prevent waste materials from being blown around by                                                                                                                                 |        |
|         | wind, wa  | stewater discharge by flushing or leaching into the marine environment, or creating odour nuisance or pest and vermin problem                                                                                                                                |        |
| Constru | ction Lai | ndscape and Visual                                                                                                                                                                                                                                           |        |
| S13.9   | CM1       | All existing trees should be carefully protected during construction.                                                                                                                                                                                        | Λ      |
|         | CM2       | Trees unavoidably affected by the works should be transplanted where practical. Detailed transplanting proposal will be                                                                                                                                      | Λ      |
|         |           | submitted to relevant government departments for approval in accordance with ETWBC 2/2004 and 3/2006. Final locations                                                                                                                                        |        |
|         |           | of transplanted trees should be agreed prior to commencement of the work.                                                                                                                                                                                    |        |
|         | СМЗ       | Control of night-time lighting.                                                                                                                                                                                                                              | N/A(1) |
|         | CM4       | Erection of decorative screen hoarding.                                                                                                                                                                                                                      | *      |

#### Remarks:

- ^ Compliance of mitigation measure
- \* Recommendation was made during site audit but improved/rectified by the Contractor
- Non-compliance but rectified by the Contractor
- X Non-compliance of mitigation measure
- N/A Not Applicable at this stage
- N/A(1) Not observed

APPENDIX L
SUMMARIES OF ENVIRONMENTAL
COMPLAINT, WARNING, SUMMON
AND NOTIFICATION OF SUCCESSFUL
PROSECUTION

Contract No. KLN/2016/04 Environmental Monitoring Works for Contract No. KL/2015/02 Kai Tak Development – Stage 5A Infrastructure at Former North Apron Area

Appendix L – Summary of environmental complaint, warning, summon and notification of successful prosecution

**Reporting Period**: 16 to 31 January 2017

Contract No. KL/2015/02

| Log Ref. | Location | Received Date | Details of Complaint/warning/summon and prosecution | Investigation/Mitigation Action | Status |
|----------|----------|---------------|-----------------------------------------------------|---------------------------------|--------|
| N/A      | N/A      | N/A           | N/A                                                 | N/A                             | N/A    |

Remarks: No environmental complaint/warning/summon and prosecution were received in the reporting period.

MA16043\App L

APPENDIX M SUMMARY OF WASTE GENERATION AND DISPOSAL RECORDS Department: <u>CEDD</u>

Contract No.:

KL/2015/02

Project: Kai Tak Development - Stage 5A Infrastructure at Former North Apron Area



Monthly Summary Waste Flow Table for 2017

As at 7 February 2017

|                                          |                             | Actual Quantiti  | es of Inert C &        | D Materials Ger | nerated Monthly            | 7             | Actual Quantities of C & D Wastes Generated Monthly |                                  |                          |                   |                             |
|------------------------------------------|-----------------------------|------------------|------------------------|-----------------|----------------------------|---------------|-----------------------------------------------------|----------------------------------|--------------------------|-------------------|-----------------------------|
| Month                                    | Total Quantity<br>Generated | and Large Broken | Reused in the Contract |                 | Disposed as<br>Public Fill | Imported Fill | Metals                                              | Paper/<br>Cardboard<br>packaging | Plastics (see<br>Note 3) | Chemical<br>Waste | Others, e.g. general refuse |
|                                          | (in '000m³)                 | (in '000m³)      | $(in '000m^3)$         | (in '000m³)     | (in '000m <sup>3</sup> )   | (in '000m³)   | (in '000kg)                                         | (in '000kg)                      | (in '000kg)              | (in '000kg)       | (in '000m³)                 |
| Jan<br>Feb<br>Mar<br>Apr<br>May<br>June  | 6651                        | 0                | 0                      | 0               | 6651                       | 0             | 0                                                   | 0                                | 0                        | 0                 | 7                           |
| Sub-total                                |                             |                  |                        |                 |                            |               |                                                     |                                  |                          |                   |                             |
| July<br>Aug<br>Sept<br>Oct<br>Nov<br>Dec |                             |                  |                        |                 |                            |               |                                                     |                                  |                          |                   |                             |
| Total                                    | 11574                       | 0                | 0                      | 0               | 11574                      | 0             | 0                                                   | 0                                | 0                        | 0                 | 147                         |

| Forecast of Total Quantities of C&D Materials to be Generated from the Contract* |                                              |                        |                          |                            |               |             |                                  |                          |                   |                             |  |
|----------------------------------------------------------------------------------|----------------------------------------------|------------------------|--------------------------|----------------------------|---------------|-------------|----------------------------------|--------------------------|-------------------|-----------------------------|--|
| Total Quantity Generated                                                         | Hard Rock<br>and Large<br>Broken<br>Concrete | Reused in the Contract | Reused in other Projects | Disposed as<br>Public Fill | Imported Fill | Metals      | Paper/<br>Cardboard<br>packaging | Plastics (see<br>Note 3) | Chemical<br>Waste | Others, e.g. general refuse |  |
| (in '000m³)                                                                      | (in '000m³)                                  | (in '000m³)            | (in '000m³)              | (in '000m³)                | (in '000m³)   | (in '000kg) | (in '000kg)                      | (in '000kg)              | (in '000kg)       | (in '000m <sup>3</sup> )    |  |
|                                                                                  |                                              |                        |                          |                            |               |             |                                  |                          |                   |                             |  |

Notes:

- (1) The performance targets are given in PS clause 6(14).
- (2) The waste flow table shall also include C & D materials that are specified in the Contract to be imported for use at the Site.
- (3) Plastics refer to plastic bottles/ containers, plastic sheets/ foam from packaging material.
- (4) The Contractor shall also submit the latest forcast of the total amount of C&D materials exected to be generated from the Works, together with a braskdown of the nature where the total amount of C&D materials expected to be generated from the Works is equal to or excreeding 50,00 m<sup>3</sup>. (PS Cleuse 25.02A(7) refers).