

Contract No. HK/2015/01 Wan Chai Development Phase II and Central Wanchai Bypass - Sampling, Field Measurement and Testing Works (Stage 3) Quarterly EM&A Report (May 2016- July 2016)

CONTRACT NO: HK/2015/01

WANCHAI DEVELOPMENT PHASE II AND CENTRAL WANCHAI BYPASS SAMPLING, FIELD MEASUREMENT AND TESTING WORK (STAGE 3)

ENVIRONMENTAL PERMIT NO. EP-376/2009, FURTHER ENVIRONMENTAL PERMIT NO. FEP-01/376/2009

> QUARTERLY ENVIRONMENTAL MONITORING AND AUDIT REPORT

> > - MAY 2016 TO JULY 2016 -

CLIENTS:

Civil Engineering and Development Department

PREPARED BY:

Lam Geotechnics Limited

11/F Centre Point 181-185 Gloucester Road, Wanchai, H.K.

Telephone: (852) 2882-3939 Facsimile: (852) 2882-3331 E-mail: <u>info@lamenviro.com</u> Website: <u>http://www.lamenviro.com</u>

CHECKED BY:

Raymond Dai Environmental Team Leader

DATE:

26 August 2016



Ref.: AACWBIECEM00_0_8453L.16.docx

26 August 2016

By Post and Fax (2691 2649)

AECOM Asia Company Limited 11/F Tower 2 Grand Central Plaza 138 Shatin Rural Committee Road Shatin New Territories Hong Kong

Attention: Mr. Conrad Ng

Dear Mr. Ng,

Re: Contract No. HK/2015/01 Wan Chai Development Phase II - Central-Wan Chai Bypass Sampling, Field Measurement and Testing Works (Stage 3)

Quarterly Environmental Monitoring and Audit Report (May to July 2016) for EP-376/2009

Reference is made to the Environmental Team's submission of the captioned Quarterly Environmental Monitoring and Audit (EM&A) Report received by e-mail on 26 August 2016 for our review and comment.

Please be informed that we have no adverse comment on the captioned submission.

Thank you for your attention and please do not hesitate to contact the undersigned should you have any queries.

Yours sincerely,

David Yeung Independent Environmental Checker

c.c.

CEDD Att LAM Att AECOM Att

Attn: Mr. Stephen Lo	by fax: 2577 5040
Attn: Mr. Raymond Dai	by fax: 2882 3331
Attn: Mr. Francis Leong / Stephen Lai	by fax: 2691 2649

Q:\Projects\AACWBIECEM00\Corr\AACWBIECEM00_0_8453L.16.docx

Ramboll Environ Hong Kong Limited 英環香港有限公司 Room 2403, 24/F., Jubilee Centre, 18 Fenwick Street, Wanchai, Hong Kong Tel: 852.3465 2888 Fax: 852.3465 2899 www.Ramboll-Environ.com



TABLE OF CONTENTS

EX	ECUTI	/E SUMMARY	3
1.	INTR	DDUCTION	5
	1.1 1.2	Scope of the Report Structure of the Report	
2.	PROJ	ECT BACKGROUND	6
	2.1 2.2 2.3 2.4	Background Scope of the Project and Site Description Project Organization and Contact Personnel Principal Work and Activities	6 7
3.	MON	TORING REQUIREMENTS	9
	3.1. 3.2.	Noise Monitoring Air Quality Monitoring	
4.	MON	TORING RESULTS	12
	4.1. 4.2. 4.3.	Noise Monitoring Results Air Quality Monitoring Results Waste Monitoring Results	13
5.	COM	PLIANCE AUDIT	15
	5.1. 5.2. 5.3. 5.4. 5.5.	Noise Monitoring Air Monitoring Site Audit Review of the Reasons for and the Implications of Non-compliance Summary of action taken in the event of and follow-up on non-compliance	
6.		PLAINTS, NOTIFICATION OF SUMMONS AND PROSECUTION	
7. 8.	CUM	JLATIVE CONSTRUCTION IMPACT DUE TO THE CONCURRENT PROJECTS	18
υ.	CON		



LIST OF TABLES

- Table 1Principal Work Activities in the reporting period
- Table 2.1
 Schedule 2 Designated Projects under this Project
- Table 2.2Contact Details of Key Personnel
- Table 2.3
 Principal Work Activities in the reporting period
- Table 3.1Noise Monitoring Stations
- Table 3.2
 Air Monitoring Stations
- Table 4.1Noise Monitoring Stations for Contract no. HK/2012/08
- Table 4.2
 Air Monitoring Station for Contract no. HK/2012/08
- Table 4.3Details of Waste Disposal for Contract no. HK/2012/08
- Table 6.1
 Cumulative Statistics on Complaints
- Table 6.2 Cumulative Statistics on Successful Prosecutions

LIST OF FIGURES

Figure 2.1	Project Layout
Figure 2.2	Project Organization Chart
Figure 3.1	Locations of Environmental Monitoring Stations and Sensitive Receivers

LIST OF APPENDICES

- Appendix 2.1 Environmental Mitigation Implementation Schedule
- Appendix 3.1 Action and Limit Level
- Appendix 4.1 Noise Monitoring Graphical Presentations
- Appendix 4.2 Air Quality Monitoring Graphical Presentations
- Appendix 5.1 Event Action Plans
- Appendix 6.1 Complaint Log
- <u>Appendix 8.1</u> Construction Programme of Individual Contracts



EXECUTIVE SUMMARY

This is the Quarterly Environmental Monitoring and Audit (EM&A) Report – May 2016 to July 2016 specific for Environmental Permit no. EP-376/2009 and Further Environmental Permit no. FEP-01/376/2009. The EM&A report is prepared by the Environmental Team (ET) employed under Contract No. HK/2015/01 – Wan Chai Development Phase II and Central Wanchai Bypass – Sampling, Field Measurement and Testing Works (Stage 3). This report presents the environmental monitoring and audit findings and information during the period from 27 April 2016 to 26 July 2016. The cut-off date of reporting is at 26th of each reporting period

Construction Activities for the Reported Period

 During this reporting period, the principle work activities of the contract is included as follows: <u>Contract no. HK/2012/08 – Wan Chai Development Phase II – Central- Wan Chai Bypass at</u> <u>Wan Chai West</u>

Table 1 Principal Work Activities in the reporting period

May 2016	June 2016	July 2016
Drainage	Drainage	Drainage
Utilities	Utilities	Utilities

Noise Monitoring

- iii. Noise monitoring was conducted at M1a Harbour Road Sports Centre.
- iv. With respect to the shift in major construction site portions at Wan Chai North, the noise monitoring station M1a – Harbour Road Sports Centre was finely adjusted from East of Harbour Road Sports Centre to West of Harbour Road Sports Centre on 21 June 2016.
- v. Two limit level exceedances were recorded at M1a Harbour Road Sports Centre on 4 and 24 May 2016 in May reporting month. After the investigation, the exceedances were concluded as non-project related.
- vi. Three limit level exceedances were recorded at M1a Harbour Road Sports Centre on 7, 13 and 21 June 2016 in June reporting month. After the investigation, the exceedances were concluded as non-project related.
- vii. One limit level exceedances were recorded at M1a Harbour Road Sports Centre on 28 June 2016 in July reporting month. After the investigation, the exceedances were concluded as non-project related.



Air Quality Monitoring

- viii. 1-hour and 24-hour Total Suspended Particulates (TSP) monitoring were conducted on every six days basis at CMA5b and CMA6a Contractor HK/2012/08 Site Office.
- ix. Due to electricity interruption, the 24hr TSP monitoring at station CMA6a and CMA5b were rescheduled as below:

24hr TSP monitoring at CMA5b was rescheduled from 20 May 2016 to 21 May 2016 24hr TSP monitoring at CMA6a was rescheduled from 7 June 2016 to 8 June 2016 24hr TSP monitoring at CMA5b was rescheduled from 11 July 2016 to 12 July 2016

- x. Due to closure of major road and pedestrian access to monitoring station, 1hr TSP monitoring at CMA5b monitoring station was rescheduled from 17 May 2016 to 20 May 2016 in May reporting month.
- xi. No exceedances were recorded in this reporting quarter.

Complaints, Notifications of Summons and Successful Prosecutions

xii. There was no environmental complaint recorded in this reporting quarter.



1. INTRODUCTION

1.1 Scope of the Report

1.1.1. Lam Geotechnics Limited (LGL) has been appointed take up the role as the Environmental Team (ET) under Environmental Permit no. EP-376/2009 and Further Environmental Permit no. FEP-01/376/2009 to implement the Environmental Monitoring and Audit (EM&A) programme as stipulated in the EM&A Manual of the approved Environmental Impact Assessment (EIA) Report for Wan Chai Development Phase II and Central-Wan Chai Bypass (Register No.: AEIAR-458/2008).

This report documents the finding of EM&A works for Environmental Permit (EP) no. EP-376/2009 and Further Environmental Permit no. FEP-01/376/2009, during the period 27 April 2016 to 26 July 2016. The cut-off date of reporting is the 27th of each reporting period.

1.2 Structure of the Report

- **Section 1** *Introduction* details the scope and structure of the report.
- Section 2 *Project Background* summarizes background and scope of the project, site description, project organization and contact details of key personnel during the reporting period.
- Section 3 *Monitoring Requirements* summarizes all monitoring parameters, monitoring locations, monitoring frequency, duration and action plan.
- Section 4 *Monitoring Results* summarizes the monitoring results obtained in the reporting period.
- Section 5 Compliance Audit summarizes the auditing of monitoring results, all exceedances environmental parameters.
- Section 6 *Complaints, Notification of summons and Prosecution* summarizes the cumulative statistics on complaints, notification of summons and prosecution
- Section 7 Cumulative Construction Impact due to the Concurrent Projects summarizes the relevant cumulative construction impact due to the concurrent activities of the concurrent Projects.

Section 8 Conclusion



2. PROJECT BACKGROUND

2.1 Background

2.1.1 Wan Chai Development phase II and Central-Wan Chai Bypass (hereafter called "the Project") are Designated Project (DP) under the Environmental Impact Assessment Ordinance (Cap. 499) (EIAO). The Environmental Impact Assessment (EIA) Report for Wan Chai Development phase II and Central-Wan Chai Bypass (Register No.: AEIAR-125/2008) has been approved on 11 December 2008.

2.2 Scope of the Project and Site Description

- 2.2.1. The design and construction of Wan Chai Development Phase II and Central Wanchai Bypass involves the construction and operation of primary and district distributor roads that is shown at *Figure 2.1*.
- 2.2.2. The key purpose of the study area encompasses the Wan Chai harbourfront area. The area starts at the boundary of Central Reclamation Phase III (CRIII) at the west and connects to the existing Hung Hing Road at the east. The scope of the project includes:
 - A dual 2-lane primary distributor road, Road P2, approximately 0.6km in length; and
 - Other new primary and district distributor roads connecting to the slip roads of the Central-Wan Chai Bypass with a total length of approximately 0.7km.
- 2.2.3. The project also contains various Schedule 2 DP that, under the EIAO, require Environmental Permits (EPs) to be granted by the DEP before they may be either constructed or operated. *Table 2.1* summarises the DP under this Project. *Figure 2.1* shows the locations of these Schedule 2 DP.

Table 2.1 Schedule 2 Designated Project under this Project

Item	Designated Project	EIAO Reference
DP2	Road P2 and other roads which are classified as	Schedule 2, Part I, A.1
	primary/district distributor roads	

2.2.4. The designated project work II (DP2) was awarded to China State-Leader Joint Venture HK/2012/08 – Wan Chai Development Phase II Central – Wan Chai Bypass at Wan Chai West as part of the Project works by the Civil Engineering and Development Department (CEDD). The construction work under EP-376/2009 by Contract no. HK/2012/08 was commenced on 13 May 2015.



2.3 Project Organization and Contact Personnel

- 2.3.1 Civil Engineering and Development Department and Highway Department are the overall project controllers for the Wan Chai Development Phase II and Central-Wan Chai Bypass respectively. For the construction phase of the Project, Project Engineer, Contractor(s), Environmental Team and Independent Environmental Checker are appointed to manage and control environmental issues.
- 2.3.2 The proposed project organization and lines of communication with respect to environmental protection works are shown in *Figure 2.2*. Key personnel and contact particulars are summarized in *Table 2.2*:

Party	Role	Post	Name	Contact No.	Contact Fax
AECOM	Engineer's Representative for WDII	Principal Resident Engineer	Mr. Frankie Fan	2587 1778	2587 1877
	Engineer's Representative for CWB	Principal Resident Engineer	Mr. Peter Poon	3922 3388	3912 3010
China State- Leader JV	Contractor under Contract	Project Director	C. N. LAI	9106 5806	2877 1522
	no. HK/2012/08	Project Manager	Mr. Eddie Chung	9189 8118	
		Site Agent	Mr. Keith Tse	9095 7922	
		Environmental Officer	Mr. James Ma	9130 9549	
		Environmental Supervisor	Mr. Y. L. Ho	9856 5669	
Ramboll Environ Hong Kong Limited	Independent Environmental Checker (IEC)	Independent Environmental Checker (IEC)	Mr. David Yeung	3465 2888	3465 2899
Lam Geotechnics Limited	Environmental Team (ET)	Environmental Team Leader (ETL)	Mr. Raymond Dai	2882 3939	2882 3331
(For Enquiry)					

Table 2.2 Contact Details of Key Personnel



2.4 Principal Work and Activities

2.4.1 During this reporting period, the principle work activities of the contract is included as follows:

<u>Contract no. HK/2012/08 – Wan Chai Development Phase II – Central- Wan Chai Bypass at</u> <u>Wan Chai West</u>

Table 2.3	Principal Work Activities in the reporting period
1 41010 210	

May 2016	June 2016	July 2016
Drainage	Drainage	Drainage
• Utilities	• Utilities	• Utilities

2.4.2 Implementation status of the recommended mitigation measures during this reporting period is presented in *Appendix 2.1*.



3. MONITORING REQUIREMENTS

3.1. Noise Monitoring

NOISE MONITORING STATION

3.1.1. The noise monitoring station for the Project is listed and shown in *Table 3.1* and *Figure 3.1*. *Appendix 3.1* shows the established Action/Limit Levels for the monitoring works.

District	Station	Description
Wan Chai	M1a	Harbour Road Sports Centre

NOISE MONITORING PARAMETERS, FREQUENCY AND DURATION

- 3.1.2. The construction noise level shall be measured in terms of the A-weighted equivalent continuous sound pressure level (L_{eq}). L_{eq (30 minutes)} shall be used as the monitoring parameter for the time period between 0700 and 1900 hours on normal weekdays. For all other time periods, L_{eq (5 minutes)} shall be employed for comparison with the Noise Control Ordinance (NCO) criteria. Supplementary information for data auditing, statistical results such as L10 and L90 shall also be obtained for reference.
- 3.1.3. Noise monitoring shall be carried out at all the designated monitoring stations. The monitoring frequency shall depend on the scale of the construction activities. The following is an initial guide on the regular monitoring frequency for each station on a weekly basis when noise generating activities are underway:
 - One set of measurements between 0700 and 1900 hours on normal weekdays.

MONITORING EQUIPMENT

- 3.1.4. As referred to in the Technical Memorandum [™] issued under the NCO, sound level meters in compliance with the International Electrotechnical Commission Publications 651: 1979 (Type 1) and 804: 1985 (Type 1) specifications shall be used for carrying out the noise monitoring. Immediately prior to and following each noise measurement the accuracy of the sound level meter shall be checked using an acoustic calibrator generating a known sound pressure level at a known frequency. Measurements may be accepted as valid only if the calibration level from before and after the noise measurement agrees to within 1.0 dB.
- 3.1.5. Noise measurements shall not be made in fog, rain, wind with a steady speed exceeding 5 m/s or wind with gusts exceeding 10 m/s. The wind speed shall be checked with a portable wind speed meter capable of measuring the wind speed in m/s.



3.2. Air Quality Monitoring

AIR QUALITY MONITORING STATIONS

3.2.1. The air monitoring stations for the Project are listed and shown in *Table 3.2* and *Figure 3.1*. *Appendix 3.1* shows the established Action/Limit Levels for the monitoring works.

Table 3.2 Air Quality Monitoring Stations

Station ID	Monitoring Location	
CMA5b	Pedestrian Plaza	
CMA6a	WDII PRE Site Office	

AIR MONITORING PARAMETERS, FREQUENCY AND DURATION

- 3.2.2. One-hour and 24-hour TSP levels should be measured to indicate the impacts of construction dust on air quality. The 24-hour TSP levels shall be measured by following the standard high volume sampling method as set out in the Title 40 of the Code of Federal Regulations, Chapter 1 (Part 50), Appendix B.
- 3.2.3. All relevant data including temperature, pressure, weather conditions, elapsed-time meter reading for the start and stop of the sampler, identification and weight of the filter paper, and any other local atmospheric factors affecting or affected by site conditions, etc., shall be recorded down in detail.
- 3.2.4. For regular impact monitoring, the sampling frequency of at least once in every six-days, shall be strictly observed at all the monitoring stations for 24-hour TSP monitoring. For 1-hour TSP monitoring, the sampling frequency of at least three times in every six-days should be undertaken when the highest dust impact occurs.

SAMPLING PROCEDURE AND MONITORING EQUIPMENT

- 3.2.5. High volume samplers (HVSs) in compliance with the following specifications shall be used for carrying out the 1-hour and 24-hour TSP monitoring:
 - 0.6 1.7 m³ per minute adjustable flow range;
 - Equipped with a timing / control device with +/- 5 minutes accuracy for 24 hours operation;
 - Installed with elapsed-time meter with +/- 2 minutes accuracy for 24 hours operation;
 - Capable of providing a minimum exposed area of 406 cm2;
 - Flow control accuracy: +/- 2.5% deviation over 24-hour sampling period;
 - Equipped with a shelter to protect the filter and sampler;
 - Incorporated with an electronic mass flow rate controller or other equivalent devices;



- Equipped with a flow recorder for continuous monitoring;
- Provided with a peaked roof inlet;
- Incorporated with a manometer;
- Able to hold and seal the filter paper to the sampler housing at horizontal position;
- Easily changeable filter; and
- Capable of operating continuously for a 24-hour period.
- 3.2.6. Initial calibration of dust monitoring equipment shall be conducted upon installation and thereafter at bi-monthly intervals. The transfer standard shall be traceable to the internationally recognized primary standard and be calibrated annually. The concern parties such as IEC shall properly document the calibration data for future reference. All the data should be converted into standard temperature and pressure condition.

LABORATORY MEASUREMENT / ANALYSIS

- 3.2.7. A clean laboratory with constant temperature and humidity control, and equipped with necessary measuring and conditioning instruments to handle the dust samples collected, shall be available for sample analysis, and equipment calibration and maintenance. The laboratory should be HOKLAS accredited.
- 3.2.8. Filter paper of size 8" x 10" shall be labelled before sampling. It shall be a clean filter paper with no pinholes, and shall be conditioned in a humidity-controlled chamber for over 24-hours and be pre-weighed before use for the sampling.
- 3.2.9. After sampling, the filter paper loaded with dust shall be kept in a clean and tightly sealed plastic bag. The filter paper shall then be returned to the laboratory for reconditioning in the humidity controlled chamber followed by accurate weighing by an electronic balance with readout down to 0.1 mg. The balance shall be regularly calibrated against a traceable standard.
- 3.2.10. All the collected samples shall be kept in a good condition for 6 months before disposal.



4. MONITORING RESULTS

- 4.0.1. The environmental monitoring will be implemented based on the division of works areas of the designed project managed under the contract with FEP applied by contractor. Overall layout showing work areas of various contracts, latest status of work commencement and monitoring stations is shown in <u>Figure 2.1</u> and <u>Figure 3.1</u>. The monitoring results are presented in according to the Individual Contract(s).
- 4.0.2. In the reporting period, the concurrent contract is:
 - Contract no. HK/2012/08 Wan Chai Development Phase II Central Wan Chai Bypass at Wan Chai West.

4.1. Noise Monitoring Results

- 4.1.1 Noise monitoring for project works under EP-376/2009 was commenced on 19 May 2015.
- 4.1.2 The proposed division of noise monitoring station is summarized in *Table 4.1* below.

Table 4.1 Noise Monitoring Station for Contract no. HK/2012/08

Location ID	District	Description
M1a	Wan Chai	Harbour Road Sports Centre

- 4.1.3 Two limit level exceedances were recorded at M1a- Harbour Road Sports Centre on 4 and 24 May 2016 in May reporting month.
- 4.1.4 No construction works for EP-376/2009 was conducted around the concerned location during the time of measurement while breaking works at Ex-Wan Chai Swimming Pool (adjacent to Habour Road Sports Centre immediately opposite to the monitoring station) under non WDII-CWB Contractor was observed as the major noise contribution during monitoring on 4 May 2016. As such, the exceedance was considered as non-Project related.
- 4.1.5 No construction works for EP-376/2009 was conducted around the concerned location during the time of measurement while hydromill tench cutter in close proximity to the monitoring station at Ex-Wan Chai Swimming Pool (adjacent to Habour Road Sports Centre immediately opposite to the monitoring station) under non WDII-CWB Contractor was observed as the major noise contribution during monitoring on 24 May 2016. As such, the exceedance was considered as non-Project related.
- 4.1.6 Three limit level exceedances were recorded at M1a- Harbour Road Sports Centre on 7, 13 and 21 June 2016 in June reporting month.



- 4.1.7 No construction works under EP-376/2009 was conducted around the concerned location during the time of measurement on 7 and 13 June 2016 while operation of Hydromill tench cutter in close proximity to the monitoring station at Ex-Wan Chai Swimming Pool (adjacent to Harbour Road Sports Centre immediately opposite to the monitoring station) under non WDII-CWB Contractor was observed as the major noise contribution during monitoring on 7 and 13 June 2016. As such, the exceedances were observed as non-Project related.
- 4.1.8 No construction works under EP-376/2009 was conducted around the concerned location during the time of measurement on 21 June 2016 while operation of breaking works opposite to monitoring station under non WDII-CWB Contractor was observed as the major noise contribution during monitoring on 21 June 2016. As such, the exceedance was considered as non-Project related.
- 4.1.9 One limit level exceedance was recorded at M1a- Harbour Road Sports Centre on 28 June 2016 in July reporting month.
- 4.1.10 No construction work under EP-376/2009 was conducted by Contract HK/2012/08 around the concerned location during the time of measurement on 28 June 2016 while operation of drill rig opposite to monitoring station under non-WDII-CWB Contractor was observed as the major noise contribution during monitoring. As such, the exceedance was considered as non-Project related.
- 4.1.11 The noise monitoring results measured in this reporting period are reviewed and summarized. Details of continuous noise monitoring results and graphical presentation can be referred to <u>Appendix 4.1</u>

4.2. Air Quality Monitoring Results

- 4.2.1 Air Quality monitoring for project works under EP-376/2009 was commenced on 16 May 2015.
- 4.2.2 The proposed division of air quality monitoring stations are summarized in *Table 4.2* below.

 Table 4.2
 Air Quality Monitoring Station for Contract no. HK/2012/08

Station	Description
CMA5b	Pedestrian Plaza
CMA6a	WDII PRE Site Office

4.2.3 No action or limit level exceedance was recorded in this reporting quarter.



4.2.4 The air quality monitoring results measured in this reporting period are reviewed and summarized. Details of air quality monitoring results and graphical presentation can be referred in <u>Appendix 4.2.</u>

4.3. Waste Monitoring Results

4.3.1 No Inert and Non-inert C&D wastes disposed in this reporting period. Details of the waste flow table are summarized in *Table 4.3*.

Waste Type	Quantity this quarter	Cumulative Quantity- to-Date	Disposal / Dumping Grounds
Inert C&D materials disposed, m3	NIL	NIL	NIL
Inert C&D materials recycled, m3	NIL	NIL	NIL
Non-inert C&D materials disposed, m3	NIL	NIL	NIL
Non-inert C&D materials recycled, m3	NIL	NIL	NIL
Chemical waste disposed, kg	NIL	NIL	NIL

 Table 4.3
 Details of Waste Disposal for Contract no. HK/2012/08



5. COMPLIANCE AUDIT

5.0.1. The Event Action Plan for construction noise and air quality are presented in Appendix 5.1.

5.1. Noise Monitoring

- 5.1.1 Two limit level exceedances were recorded at M1a- Harbour Road Sports Centre on 4 and 24 May 2016 in May reporting month.
- 5.1.2 No construction works for EP-376/2009 was conducted around the concerned location during the time of measurement while breaking works at Ex-Wan Chai Swimming Pool (adjacent to Habour Road Sports Centre immediately opposite to the monitoring station) under non WDII-CWB Contractor was observed as the major noise contribution during monitoring on 4 May 2016. As such, the exceedance was considered as non-Project related.
- 5.1.3 No construction works for EP-376/2009 was conducted around the concerned location during the time of measurement while hydromill tench cutter in close proximity to the monitoring station at Ex-Wan Chai Swimming Pool (adjacent to Habour Road Sports Centre immediately opposite to the monitoring station) under non WDII-CWB Contractor was observed as the major noise contribution during monitoring on 24 May 2016. As such, the exceedance was considered as non-Project related.
- 5.1.4 Three limit level exceedances were recorded at M1a- Harbour Road Sports Centre on 7, 13 and 21 June 2016 in June reporting month.
- 5.1.5 No construction works under EP-376/2009 was conducted around the concerned location during the time of measurement on 7 and 13 June 2016 while operation of Hydromill tench cutter in close proximity to the monitoring station at Ex-Wan Chai Swimming Pool (adjacent to Harbour Road Sports Centre immediately opposite to the monitoring station) under non WDII-CWB Contractor was observed as the major noise contribution during monitoring on 7 and 13 June 2016. As such, the exceedances were observed as non-Project related.
- 5.1.6 No construction works under EP-376/2009 was conducted around the concerned location during the time of measurement on 21 June 2016 while operation of breaking works opposite to monitoring station under non WDII-CWB Contractor was observed as the major noise contribution during monitoring on 21 June 2016. As such, the exceedance was considered as non-Project related.
- 5.1.7 One limit level exceedance was recorded at M1a- Harbour Road Sports Centre on 28 June 2016 in July reporting month.
- 5.1.8 No construction work under EP-376/2009 was conducted by Contract HK/2012/08 around the concerned location during the time of measurement on 28 June 2016 while operation of drill



rig opposite to monitoring station under non-WDII-CWB Contractor was observed as the major noise contribution during monitoring. As such, the exceedance was considered as non-Project related.

5.2. Air Quality Monitoring

5.2.1 No action or limit level exceedance was recorded in this reporting quarter.

5.3. Site Audit

5.3.1 There was no non-compliance from the site audits in the reporting period. During environmental site inspections conducted during the reporting period, minor deficiencies were noted.

5.4. Review of the Reasons for and the Implications of Non-compliance

5.4.1 There was no non-compliance from the site audits in the reporting period.

5.5. Summary of action taken in the event of and follow-up on non-compliance

5.5.1 There was no particular action taken since no project-related non-compliance was recorded from the site audits and environmental monitoring in the reporting period.



6. COMPLAINTS, NOTIFICATION OF SUMMONS AND PROSECUTION

- 6.0.1. No environmental complaint received in this reporting quarter.
- 6.0.2. The details of cumulative complaint log and summary of complaints are presented in *Appendix* 6.1.
- 6.0.3. No notification of summons or prosecution was received in the reporting period. Cumulative statistic on complaints and successful prosecutions are summarized in *Table 6.1* and *Table 6.2* respectively.

Table 6.1 Cumulative Statistics on Complaints

Reporting Period	No. of Complaints
Commencement works (May 2015) to last reporting quarter	0
May 2016 to July 2016	0
Project-to-Date	0

Table 6.2 Cumulative Statistics on Successful Prosecutions

Environmental Parameters	Cumulative No. Brought Forward	No. of Successful Prosecutions this quarter (Offence Date)	Cumulative No. Project-to-Date
Air	-	0	0
Noise	-	0	0
Water	-	0	0
Waste	-	0	0
Total	-	0	0



7. CUMULATIVE CONSTRUCTION IMPACT DUE TO THE CONCURRENT PROJECTS

- 7.0.1. According to the Condition 3.4 of the EP-376/2009, this section addresses the relevant cumulative construction impact due to the concurrent activities of the current projects including the Central Reclamation Phase III (CRIII), Wan Chai Development Phase II (WDII), Central-WanChai Bypass (CWB), Island Eastern Corridor Link projects (IECL) and Wan Chai Development Phase II Central Wan Chai Bypass at Wan Chai East (CWB Tunnel).
- 7.0.2. According to the Final EM&A report of Central Reclamation Phase III (CRIII) for Contract HK 12/02, the major construction activities were completed by end of January 2014 and no construction activities were undertaken thereafter and the water quality monitoring was completed in October 2011. As such, it is considered that there were no cumulative construction impact due to the concurrent activities of the current projects with the Central Reclamation Phase III (CRIII) undertaken by contractor HK12/02 in the reporting period.
- 7.0.3. According to the construction programme of Central-Wanchai Bypass at Wanchai West at the Central Reclamation Phase III area include structural works for tunnel construction, road works and drainage works, and seawall modification were performed in July 2016 reporting month. As no project related exceedance were recorded during the reporting period, cumulative construction impact due to the concurrent activities of the current projects with the Central Reclamation Phase III (CRIII) was considered as insignificant.
- 7.0.4. According to the construction programme of Wan Chai Development Phase II, Central-Wan Chai Bypass and Island Eastern Corridor Link projects, the major construction activities under Wan Chai Development Phase II were tunnel works at Wan Chai East and culvert construction, tunnel construction and ELS works at Wan Chai West. The major construction activities under Central-Wan Chai Bypass and Island Eastern Corridor Link Projects were road works and ventilation building construction at Central Interchange, temporary reclamation removal works at Ex-PCWAW, ELS works and retaining wall construction at Victoria Park, ELS works and tunnel works at TS3; bridge construction, piling and tunnel works at North Point area in the reporting month. In addition, other non-Wan Chai Development Phase II, Central-Wan Chai Bypass and Island Eastern Corridor Link projects was observed undertaken at Wan Chai North and North Point area.
- 7.0.5. No significant air quality impact from construction activities was anticipated in the reporting period. Besides, no project related exceedance was recorded during air quality and noise environmental monitoring events in the reporting period. Thus, it is evaluated that the cumulative construction impact from the concurrent projects including Central Reclamation Phase III (CRIII), Wan Chai Development Phase II (WDII), Central-WanChai Bypass (CWB), Island Eastern Corridor Link projects (IECL) was insignificant.



8. CONCLUSION

- 8.0.1. The EM&A programme was carried out in accordance with the EM&A Manual requirements, minor alterations to the programme proposed were made in response to changing circumstances.
- 8.0.2. No non-compliance and no prosecutions were received during the reporting period.
- 8.0.3. Mitigation measures according to the environmental mitigation implementation schedule and the EIA were generally implemented by the Contractor in this reporting period. Environmental site audit was conducted by the Environmental Team and the Independent Environmental Checker and no cumulative environmental impact was identified in the reporting period. Hence, the EM&A programme was considered effective and shall be maintained.
- 8.0.4. The construction programmes of individual contracts are provided in *Appendix 8.1*.



Figure 2.1

Project Layout

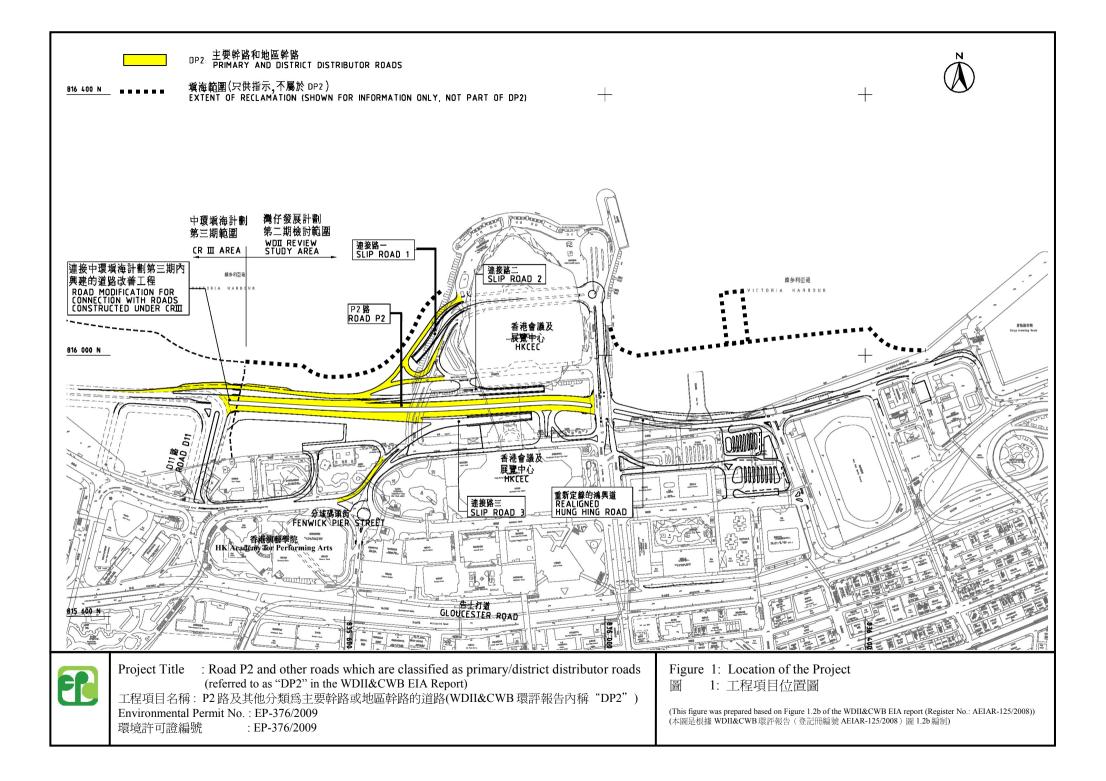




Figure 2.2

Project Organization Chart



Project Organization Chart

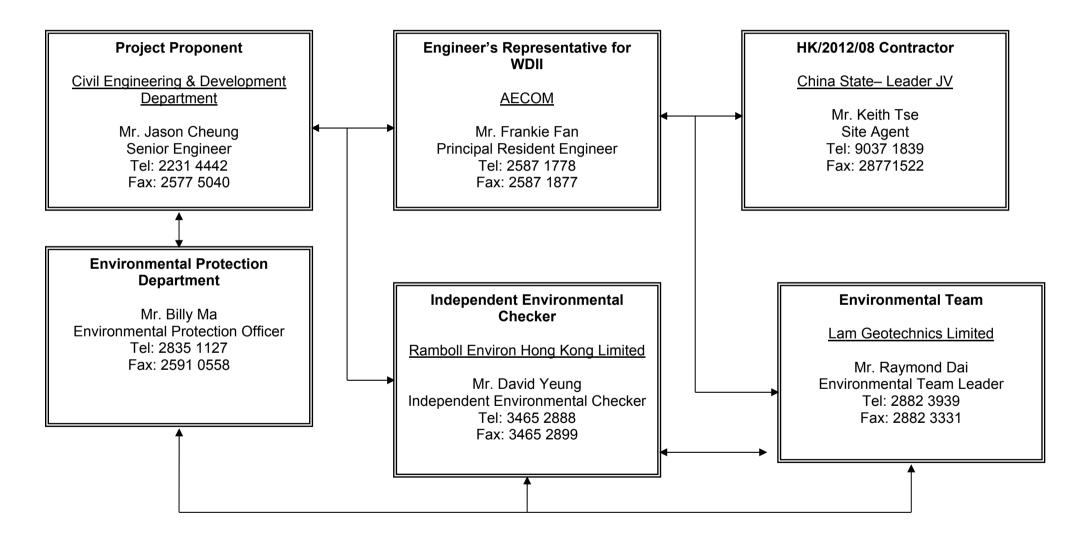
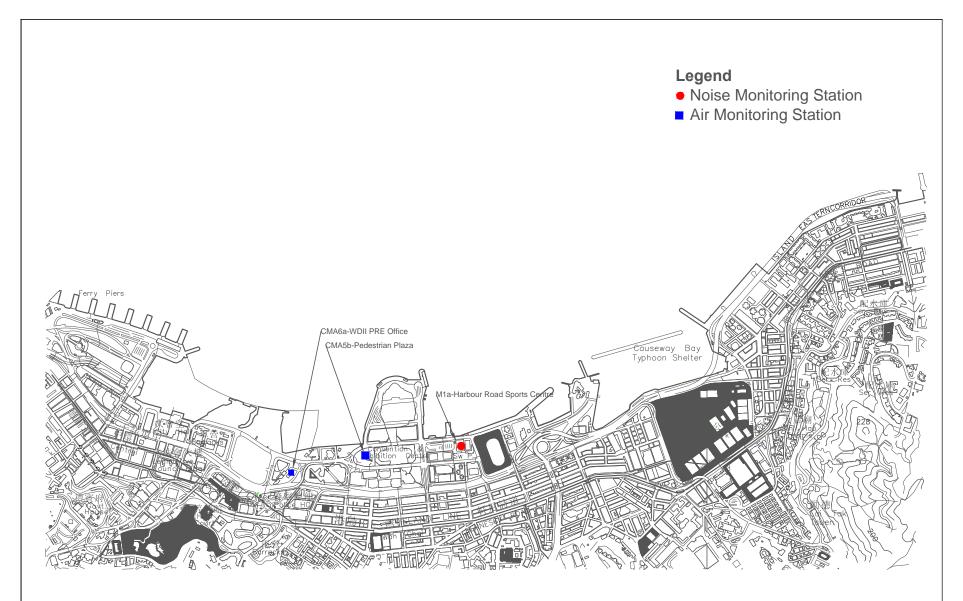


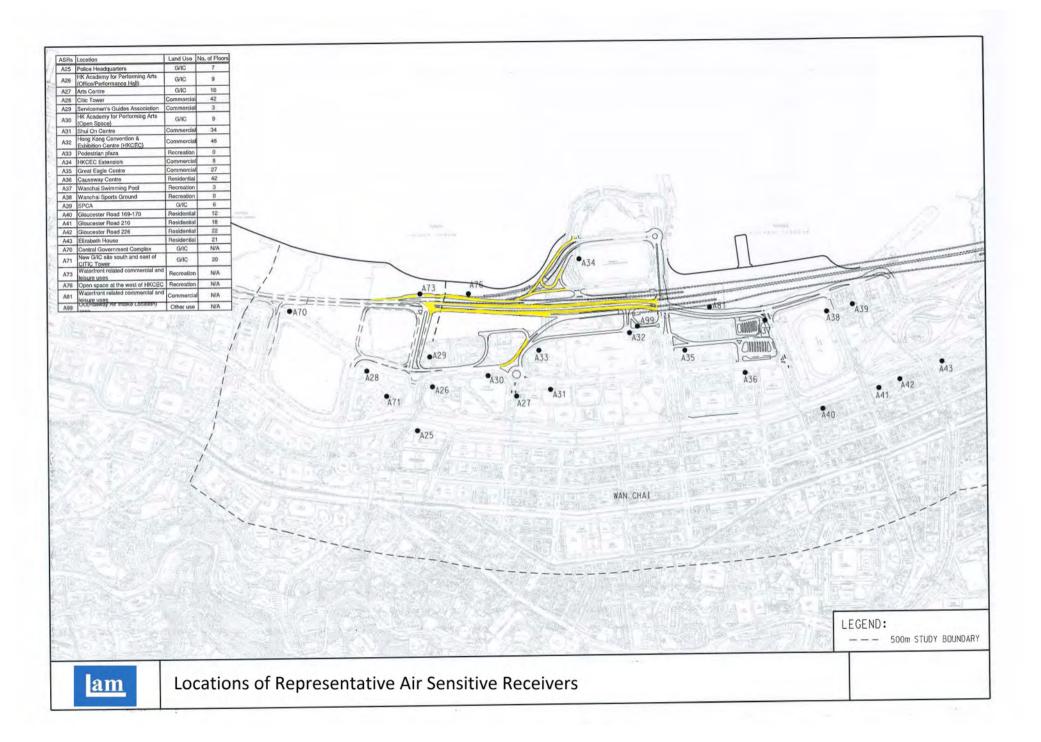



Figure 3.1

Locations of Environmental Monitoring Stations and Sensitive Recievers



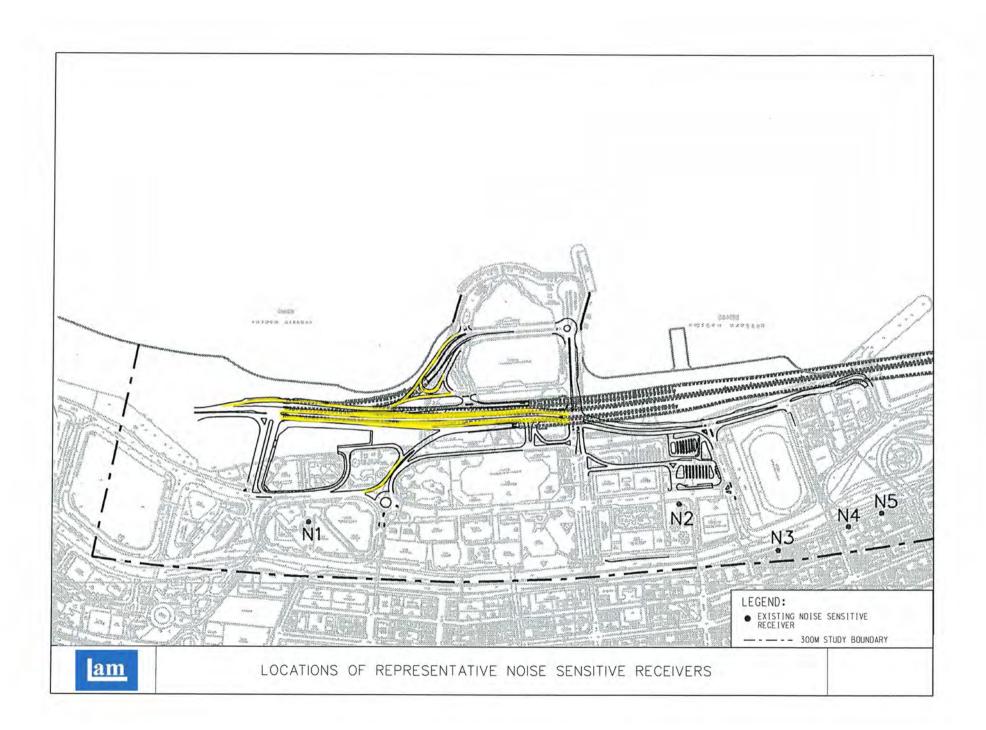LOCATIONS OF AIR QUALITY AND NOISE MONITORING STATIONS







Appendix 2.1

Environmental Mitigation Implementation Schedule

Appendix A

 Table A13.1 Implementation Schedule for Air Quality Control

 Table A13.2 Implementation Schedule for Noise Control

Table A13.3 Implementation Schedule for Water Quality Control

 Table A13.4 Implementation Schedule for Waste Management

 Table A13.7 Implementation Schedule for Landscape and Visual

IMPLEMENTATION SCHEDULE OF THE PROPOSED MITIGATION MEASURES

Table A13.1 Implementation Schedule for Air Quality Control

EIA Ref	Environmental Protection Measures /	Location / Timing	Implementation	Implementation Status	Relevant Legislation
	Mitigation Measures		Agent		and Guidelines
Construction					
For the Wh					-
\$3.6.5	Four times a day watering of the work site with active operations.	Work site / during construction	Contractor	Implemented during Construction Stage	EIAO-TM
\$3.8.1	 Implementation of dust suppression measures stipulated in Air Pollution Control (Construction Dust) Regulation. The following mitigation measures, good site practices and a comprehensive dust monitoring and audit programme are recommended to minimise cumulative dust impacts. Strictly limit the truck speed on site to below 10 km per hour and water spraying to keep the haul roads in wet condition; Watering during excavation and material handling; Provision of vehicle wheel and body washing facilities at the exit points of the site, combined with cleaning of public roads where necessary; and 	Work site / during construction	Contractor	Implemented during Construction Stage	
	• Tarpaulin covering of all dusty vehicle loads transported to, from and between site locations.				

EIA Ref	Environmental Protection Measures /	Location / Timing	Implementation	Implementation Status	Relevant Legislation		
	Mitigation Measures		Agent	-	and Guidelines		
Construction	on Phase						
For the Wh	ole Project						
S4.9.4	Good Site Practice:	Work site / during	Contractor	Implemented during	EIAO-TM, NCO		
	 Only well-maintained plant shall be 	construction		Construction Stage			
	operated on-site and plant shall be serviced						
	regularly during the construction program.						
	 Silencers or mufflers on construction 						
	equipment shall be utilized and shall be properly						
	maintained during the construction program.						
	 Mobile plant, if any, shall be sited as far 						
	away from NSRs as possible.						
	 Machines and plant (such as trucks) that 						
	may be in intermittent use shall be shut down						
	between works periods or shall be throttled down						
	to a minimum.						
	 Plant known to emit noise strongly in 						
	one direction shall, wherever possible, be						
	orientated so that the noise is directed away from						
	the nearby NSRs.						
	 Material stockpiles and other structures 						
	shall be effectively utilized, wherever						
	practicable, in screening noise from onsite						
	construction activities.						
	WDII Major Roads (Road P2)		Τ		T		
S4.8.3 –	Use of quiet powered mechanical equipment,	Work site / during	Contractor	Implemented during	EIAO-TM, NCO		
S4.8.4	movable noise	construction		Construction Stage			
	barrier and temporary noise barrier for the						
	following tasks:						
	 Temporary road diversion 						
	 Resurfacing 						
	 At-grade roadwork 	1					

Table A13.3 Implementation Schedule for Water Quality Control

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Status	Relevant Legislation and Guidelines
Constructio			0		
For the Who	ole Project				
<u>55.8</u>	 Construction Runoff and Drainage use of sediment traps, wheel washing facilities for vehicles leaving the site, and adequate maintenance of drainage systems to prevent flooding and overflow; Permanent drainage channels shall incorporate sediment basins or traps and baffles to enhance deposition rates. The design of efficient silt removal facilities shall be based on the guidelines in Appendix A1 of ProPECC PN 1/94; a sediment tank constructed from preformed individual cells of approximately 6 - 8 m3 capacity can be used for settling ground water prior to disposal; Oil interceptors shall be provided in the drainage system for the tunnels and regularly cleaned to prevent flushing during periods of heavy rain; precautions and actions to be taken when a rainstorm is imminent or forecast, and during or after rainstorms. Particular attention shall be paid to the control of any silty surface runoff during storm events; On-site drainage system shall be installed prior to the commencement of other construction activities. Sediment traps shall be 	Work site / during construction	Contractor	Implemented during Construction Stage	ProPECC PN 1/94; WPCO (TM-DSS)

	 installed in order to minimise the sediment loading of the effluent prior to discharge; All temporary and permanent drainage pipes and culverts provided to facilitate runoff discharge shall be adequately designed for the controlled release of storm flows. All sediment control measures shall be regularly inspected and maintained to ensure proper and efficient operation at all times and particularly following rain storms. The temporarily diverted drainage shall be reinstated to its original condition when the construction work is finished or the temporary diversion is no longer required. All fuel tanks and store areas shall be provided with locks and be sited on sealed areas, within bunds of a capacity equal to 110% of the storage capacity. Minimum distances of 100 m shall be maintained between the storm water discharges and the existing or planned WSD flushing water intakes during construction phase. 				
S5.8	Sewage from Construction Work Force Construction work force sewage discharges on site shall be connected to the existing trunk sewer or sewage treatment facilities. The construction sewage shall be handled by portable chemical toilets prior to the commission of the on-site sewer system. Appropriate numbers of portable toilets shall be provided by a licensed contractor to serve the large number of construction workers over the construction site. The Contractor shall also be responsible for waste disposal and maintenance practices.	Work site / during construction	Contractor	Implemented during Construction Stage	ProPECC PN 1/94; WPCO (TM-DSS)

EP-376/20	009				EM&A Manual
\$5.8	<i>Floating Debris and Refuse</i> Collection and removal of floating refuse shall be performed at regular intervals on a daily basis. The contractor shall be responsible for keeping the water within the site boundary and the neighbouring water free from rubbish.	Work site and adjacent water / During the construction period.	Contractor	Implemented during Construction Stage	WPCO
S5.8	Storm Water Discharges Minimum distances of 100 m shall be maintained between the existing or planned stormwater discharges and the existing or planned WSD flushing water intakes.	Work site and adjacent water / During the design and construction period.	Contractor	Implemented during Construction Stage	WPCO

Table A13.4 Implementation Schedule for Waste Management

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Status	Relevant Legislation and Guidelines
Constructio	on Phase	•	· •	•	·
For the Wh	ole Project				
S6.7.7	 Good Site Practices Recommendations for good site practices during the construction activities include: nomination of an approved person, such as a site manager, to be responsible for good site practices, arrangements for collection and effective disposal to an appropriate facility, of all wastes generated at the site; training of site personnel in proper waste management and chemical waste handling procedures; provision of sufficient waste disposal points and regular collection for disposal; appropriate measures to minimise windblown litter and dust during transportation of waste by either covering trucks or by transporting wastes in enclosed containers; regular cleaning and maintenance programme for drainage systems, sumps and oil interceptors; and a recording system for the amount of wastes generated, recycled and disposed of (including the disposal sites). 	Work site / During planning and design stage, and construction stage	Contractor	Implemented during Construction Stage	
S.6.7.8	 Waste Reduction Measures Recommendations to achieve waste reduction include: Sort C&D waste from demolition of the existing waterfront structures to recover recyclable portions such as metals. 	Work site / During planning and design stage, and construction stage	Contractor	Implemented during Construction Stage	

LI 010/2003					Emartinaria
	 Segregation and storage of different types of waste in different containers, skips or stockpiles to enhance reuse or recycling of materials and their proper disposal. Encourage collection of aluminium cans, PET bottles and paper by providing separate labelled bins to enable these wastes to be segregated from other general refuse generated by the work force. Any unused chemicals or those with remaining functional capacity shall be recycled. Use of reusable non-timber formwork, such as in casting the tunnel box sections, to reduce the amount of C&D material. Proper storage and site practices to minimise the potential for damage or contamination of construction materials. Plan and stock construction materials carefully to minimise amount of waste generated and avoid unnecessary generation of waste. 				
\$6.7.10	General RefuseGeneral refuse shall be stored in enclosed bins or compaction units separate from C&D material. A licensed waste collector shall be employed by the contractor to remove general refuse from the site, separately from C&D material.A collection area shall be provided where wastes can be stored and loaded prior to removal from site. An enclosed and covered area is recommended to reduce the occurrence of 'wind blow' light material.	Work site / During the construction period	Contractor	Implemented during Construction Stage	Public Health and Municipal Services Ordinance (Cap. 132)

EP-376/2009)				EM&A Manual
S6.7.11	Chemical Wastes After use, chemical wastes (for example, cleaning fluids, solvents, lubrication oil and fuel) shall be handled according to the Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes. Spent chemicals shall be collected by a licensed collector for disposal at the CWTF or other licensed facility in accordance with the Waste Disposal (Chemical Waste) (General) Regulation.	Work site / During the construction period	Contractor	To be implemented at the corresponding stage of construction	Waste Disposal (Chemical Waste) (General) Regulation Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes
S6.7.12 – S6.7.13	 <i>Construction and Demolition Material</i> <i>Construction and Demolition Material</i> C&D material shall be sorted on-site into inert C&D material (that is, public fill) and C&D waste. All the suitable inert C&D material shall be broken down to 250 mm in size for reuse as public fill in the WDII reclamation. C&D waste, such as wood, glass, plastic, steel and other metals shall be reused or recycled and, as a last resort, disposed of to landfill. A suitable area shall be designated to facilitate the sorting process and a temporary stockpiling area will be required for the separated materials. In order to monitor the disposal of public fill and C&D waste at public fill reception facilities and landfills, respectively, and to control fly tipping, a trip-ticket system shall be included as one of the contractual requirements and implemented by the Environmental Team undertaking the environmental monitoring and audit work. An Independent Environment Checker shall be 	Work site / During the construction period	Contractor and Independent Environmental Checker	To be implemented at the corresponding stage of construction	DEVB TCW No.6/2010; ETWB TCW No. 33/2002; ETWB TCW No. 19/2005
S6.7.14	Bentonite Slurry The disposal of residual used bentonite slurry shall follow the good practice guidelines stated	Work site / During the construction period	Contractor	To be implemented at the corresponding stage of construction	ProPECC PN 1/94

EM&A Manual

 in ProPECC PN 1/94 "Construction Site Drainage" and listed as follows: If the disposal of a certain residual quantity cannot be avoided, the used slurry may be disposed of at the marine spoil grounds subject to obtaining a marine dumping licence from EPD on a case-by-case basis. 		
 If the used bentonite slurry is intended to be disposed of through the public drainage system, it shall be treated to the respective effluent standards applicable to foul sewers, storm drains or the receiving waters as set out in the Technical Memorandum of Standards for Effluents Discharged into Drainage and Sewerage Systems, Inland and Coastal Waters. 		
 If the used bentonite slurry is intended to be disposed to public fill reception facilities, it will be mixed with dry soil on site before disposal. 		

Table A13.7 Implementation Schedule for Landscape and Visual

EIA Ref	Environmental Protection Measures /	Location / Timing	Implementation	Implementation Status	Relevant Legislation	
~ .	Mitigation Measures	Agent			and Guidelines	
Construction						
For the Who			1			
Table 10.5	CM1 Topsoil, where identified, shall be stripped	Work site / During	Contractor	Implemented during	EIAO TM	
	and stored for re-use in the construction of the	Construction Phase		Construction Stage		
	soft landscape works, where practical.					
Table 10.5	CM2 Existing trees to be retained on site shall be	Work site / During	Contractor	Implemented during	EIAO TM	
	carefully protected during construction.	Construction Phase		Construction Stage		
Table 10.5	CM3 Trees unavoidably affected by the works	Work site / During	Contractor	Implemented during	EIAO TM	
	shall be transplanted where practical.	Construction Phase		Construction Stage		
Table 10.5	CM4 Compensatory tree planting shall be	Work site / During	Contractor	Implemented during	EIAO TM	
	provided to compensate for felled trees.	Construction Phase		Construction Stage		
Table 10.5	CM5 Control of night-time lighting.	Work site / During	Contractor	Implemented during	EIAO TM	
		Construction Phase		Construction Stage		
Table 10.5	CM6 Erection of decorative screen hoarding	Work site / During	Contractor	Implemented during	EIAO TM	
	compatible with the surrounding setting.	Construction Phase		Construction Stage		
For DP2 – W	VDII Major Roads (Road P2)	•			·	
Table 10.5	CM1 Topsoil, where identified, shall be stripped	Work site / During	Contractor	Implemented during	EIAO TM	
	and stored for re-use in the construction of the	Construction Phase		Construction Stage		
	soft landscape works, where practical.			C		
Table 10.5	CM2 Existing trees to be retained on site shall be	Work site / During	Contractor	Implemented during	EIAO TM	
	carefully protected during construction.	Construction Phase		Construction Stage		
Table 10.5	CM3 Trees unavoidably affected by the works	Work site / During	Contractor	Implemented during	EIAO TM	
	shall be transplanted where practical.	Construction Phase		Construction Stage		
Table 10.5	CM4 Compensatory tree planting shall be	Work site / During	Contractor	Implemented during	EIAO TM	
	provided to compensate for felled trees.	Construction Phase		Construction Stage		
Table 10.5	CM5 Control of night-time lighting.	Work site / During	Contractor	Implemented during	EIAO TM	
		Construction Phase		Construction Stage		
Table 10.5	CM6 Erection of decorative screen hoarding	Work site / During	Contractor	Implemented during	EIAO TM	
	compatible with the surrounding setting.	Construction Phase		Construction Stage		

EM&A Manual

Operation P	hase				
For DP2 – W	DII Major Roads (Road P2)				
Table 10.6,	OM1 Aesthetic design of buildings and road-	Work site / During	CEDD/HyD	To be implemented	ETWB TCW 2/2004
Figure	related structures,	Design Stage and		during Operation Stage	
10.5.1-	including viaducts, vent buildings, subways,	Operation Phases			
10.5.5	footbridges				
	and noise barriers and enclosure.				
Table 10.6,	OM3 Buffer Tree and Shrub Planting to screen	Work site / During	CEDD/HyD	To be implemented	ETWB TCW 2/2004
Figure	proposed roads	Design Stage and		during Operation Stage	
10.5.1-	and associated structures.	Operation Phases			
10.5.5					
Table 10.6,	OM5 Aesthetic streetscape design.	Work site / During	CEDD/HyD	To be implemented	ETWB TCW 2/2004
Figure		Design Stage and		during Operation Stage	
10.5.1-		Operation Phases			
10.5.5					
Table 10.6,	OM6 Aesthetic design of roadside amenity areas	Work site / During	CEDD/HyD	To be implemented	ETWB TCW 2/2004
Figure		Design Stage and		during Operation Stage	
10.5.1-		Operation Phases			
10.5.5					



Appendix 3.1

Action and Limit Level



Lam Geotechnics Limited

Action and Limit Level

Action and Limit Level for Noise Monitoring

Time Period	Action Level	Limit Level
07:00 - 19:00 hours on normal weekdays	When one documented complaint is received.	75 dB(A)

Notes: If works are to be carried out during restricted hours, the conditions stipulated in the Construction Noise Permit (CNP) issued by the Noise Control Authority have to be followed. *The Limit level shall be 70 dB(A) and 65 dB(A) for educational institute during normal teaching periods and school examination periods, respectively.

Action and Limit Level for Air Monitoring

Monitoring Locations	1-hour TSP Le	vel inµg/m3	24-hour TSP Level inµg/m3		
	Action Level	Limit Level	Action Level	Limit Level	
CMA5b Pedestrian Plaza	339.7	500	209.9	260	
CMA6a WDII PRE Site Office	333.0	500	207.1	260	




Appendix 4.1

Noise Monitoring Graphical Presentations



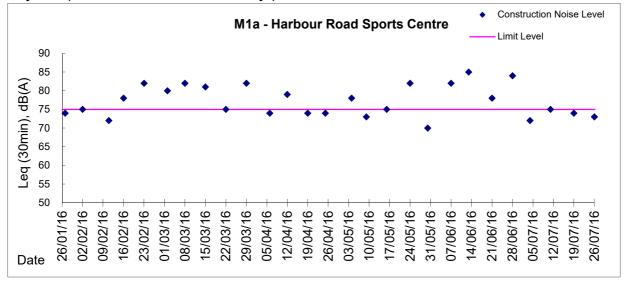Graphic Presentation of Noise Monitoring Result Day Time (0700 - 1900hrs on normal weekdays)






Appendix 4.2

Air Quality Monitoring Graphical Presentations




Contract No. HK/2015/01 Wanchai Development Phase II and Central Wanchai Bypass

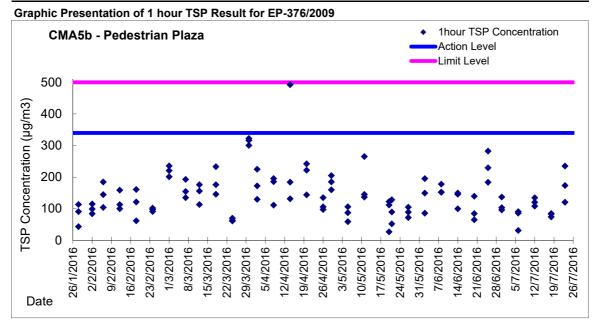Sampling, Field Measurement and Testing Work (Stage 3)



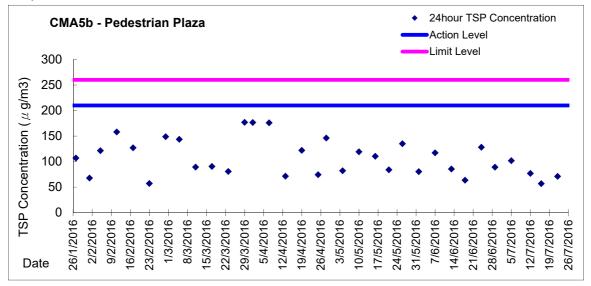
Graphic Presentation of 24 hour TSP Result for EP-376/2009




am

Contract No. HK/2015/01 Wanchai Development Phase II and Central Wanchai Bypass

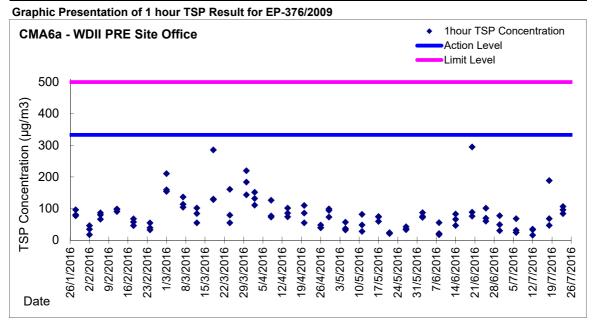Sampling, Field Measurement and Testing Work (Stage 3)



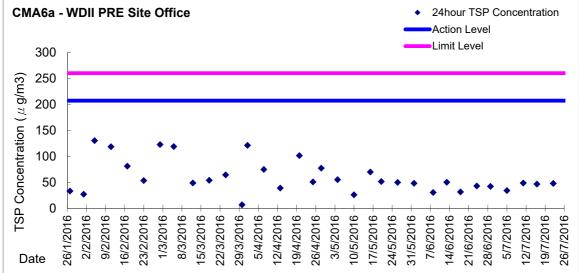Graphic Presentation of 24 hour TSP Result for EP-376/2009





Appendix 5.1

Event Action Plans



Event/Action Plan for Construction Noise

EVENT		A	CTION	
	ET	IEC	ER	CONTRACTOR
Action Level being exceeded	 Notify ER, IEC and Contractor; Carry out investigation; Report the results of investigation to the IEC, ER and Contractor; Discuss with the IEC and Contractor on remedial measures required; Increase monitoring frequency to check mitigation effectiveness. (The above actions should be taken within 2 working days after the exceedance is identified) 	 Review the investigation results submitted by the ET; Review the proposed remedial measures by the Contractor and advise the ER accordingly; Advise the ER on the effectiveness of the proposed remedial measures. (The above actions should be taken within 2 working days after the exceedance is identified) 	 Confirm receipt of notification of failure in writing; Notify Contractor; In consolidation with the IEC, agree with the Contractor on the remedial measures to be implemented; Supervise the implementation of remedial measures. (The above actions should be taken within 2 working days after the exceedance is identified) 	 Submit noise mitigation proposals to IEC and ER; Implement noise mitigation proposals. (The above actions should be taken within 2 working days after the exceedance is identified)



EVENT	ACTION							
	ET	IEC	ER	CONTRACTOR				
Limit Level being exceeded	 Inform IEC, ER, Contractor and EPD; Repeat measurements to confirm findings; Increase monitoring frequency; 4. Identify source and investigate the cause of exceedance; 5. Carry out analysis of Contractor's working procedures; 6. Discuss with the IEC, Contractor and ER on remedial measures required; Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results; If exceedance stops, cease additional monitoring. (The above actions should be taken within 2 working days after the exceedance is identified) 	actions; 2. Review Contractor's remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly.	 Confirm receipt of notification of failure in writing; Notify Contractor; In consolidation with the IEC, agree with the Contractor on the remedial measures to be implemented; Supervise the implementation of remedial measures; If exceedance continues, consider stopping the Contractor to continue working on that portion of work which causes the exceedance until the exceedance is abated. (The above actions should be taken within 2 working days after the exceedance is identified) 	 Take immediate action to avoid further exceedance; Submit proposals for remedial actions to IEC and ER within 3 working days of notification; Implement the agreed proposals; Submit further proposal if problem still not under control; Stop the relevant portion of works as instructed by the ER until the exceedance is abated. (The above actions should be taken within 2 working days after the exceedance is identified) 				



Event / Action Plan for Construction Air Quality

EVENT	ACTION					
EVENI	ET	IEC	ER	CONTRACTOR		
ACTION LEVEL						
1. Exceedance for one sample	 Identify source, investigate the causes of exceedance and propose remedial measures; Inform IEC and ER; Repeat measurement to confirm finding; Increase monitoring frequency to daily. (The above actions should be taken within 2 working days after the exceedance is identified) 	 Check monitoring data submitted by ET; Check Contractor's working method. (The above actions should be taken within 2 working days after the exceedance is identified) 	Notify Contractor. (The above actions should be taken within 2 working days after the exceedance is identified)	 Rectify any unacceptable practice; Amend working methods if appropriate. (The above actions should be taken within 2 working days after the exceedance is identified) 		
2. Exceedance for two or more consecutive samples	 Identify source; Inform IEC and ER; Advise the ER on the effectiveness of the proposed remedial measures; Repeat measurements to confirm findings; Increase monitoring frequency to daily; Discuss with IEC and Contractor on remedial actions required; If exceedance continues, arrange meeting with IEC and ER; If exceedance stops, cease additional monitoring. (The above actions should be taken within 2 working days after the exceedance is identified) 	 Check monitoring data submitted by ET; Check Contractor's working method; Discuss with ET and Contractor on possible remedial measures; Advise the ET on the effectiveness of the proposed remedial measures; Supervise Implementation of remedial measures. (The above actions should be taken within 2 working days after the exceedance is identified) 	 Confirm receipt of notification of failure in writing; Notify Contractor; Ensure remedial measures properly implemented. (The above actions should be taken within 2 working days after the exceedance is identified) 	 Submit proposals for remedial to ER within 3 working days of notification; Implement the agreed proposals; Amend proposal if appropriate. (The above actions should be taken within 2 working days after the exceedance is identified) 		
LIMIT LEVEL						
1. Exceedance for one sample	 Identify source, investigate the causes of exceedance and propose remedial measures; Inform ER, Contractor and EPD; Repeat measurement to confirm finding; Increase monitoring frequency to daily; Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results. (The above actions should be taken within 2 working days after the exceedance is identified) 	 Check monitoring data submitted by ET; Check Contractor's working method; Discuss with ET and Contractor on possible remedial measures; Advise the ER on the effectiveness of the proposed remedial measures; Supervise implementation of remedial measures. (The above actions should be taken within 2 working days after the exceedance is identified) 	 Confirm receipt of notification of failure in writing; Notify Contractor; Ensure remedial measures properly implemented. (The above actions should be taken within 2 working days after the exceedance is identified) 	 Take immediate action to avoid further exceedance; Submit proposals for remedial actions to IEC within 3 working days of notification; Implement the agreed proposals; Amend proposal if appropriate. (The above actions should be taken within 2 working days after the exceedance is identified) 		
2. Exceedance for two or more consecutive samples	 Notify IEC, ER, Contractor and EPD; Identify source; Repeat measurement to confirm findings; Increase monitoring frequency to daily; Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented; Arrange meeting with IEC and ER to discuss the remedial actions to be taken; Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results; If exceedance stops, cease additional monitoring. (The above actions should be taken within 2 working days after the exceedance is identified) 	 Discuss amongst ER, ET, and Contractor on the potential remedial actions; Review Contractor's remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly; Supervise the implementation of remedial measures. 	 Confirm receipt of notification of failure in writing; Notify Contractor; In consolidation with the IEC, agree with the Contractor on the remedial measures to be implemented; Ensure remedial measures properly implemented; If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated. (The above actions should be taken within 2 working days after the exceedance is identified) 	 Take immediate action to avoid further exceedance; Submit proposals for remedial actions to IEC within 3 working days of notification; Implement the agreed proposals; Resubmit proposals if problem still not under control; Stop the relevant portion of works as determined by the ER until the exceedance is abated. (The above actions should be taken within 2 working days after the exceedance is identified) 		



Appendix 6.1

Complaint Log



Environmental Complaints Log

Complaint Log No.	Date of Complaint	Received From and Received By	Location of Complainant	Nature of Complaint	Outcome	Status



Appendix 8.1

Construction Programme of Individual Contracts

CEc .	teader 中國建 CHINA STATE										Ce	,	War	n Ch	ai D	ract No evelop i Bypas	ment	Pha	se II		est				
	Activity Name	Orig Dur	Early Start	Early Finish	Road & Drain	Feb	Mar	Apr	May Ji	2015 un Jul	Aug	Sep	Oct	Nov	Dec	Jan Fe	b Mar	Apr	May	2 Jun	2016 Jul	Aug Sep	Oct	Nov	Dec
2012/08	Revised Works Programme Rev.4 (Revi	ised as	of 28-Feb-15) - Road & I	Drain				-																
rks for Se	ection Completion																								
nstruction																									
ction III - R	coad D11 & Part of Road P2, Area 4, Implement	1st Stag	e ITA																						
oadwork & l	Utilities																								
eneral																									
5III10040	Sec III - roadwork & utilities - storm water drain	145	28-Mar-15	22-Sep-15	Road		-					_	Sec III ·	- roadwo	ork & uti	lities - storm v	vater drair	& subso	il drain						
SIII10060	& subsoil drain Sec III - roadwork & utilities - Watermain &	110	23-Apr-15	02-Sep-15	Road	_		-				Sec I	II - road	lwork &	utilities	Watermain 8	Irrigatior	Mains							
511110080	Irrigation Mains Sec III - roadwork & utilities - gas main and	110	16-May-15	24-Sep-15	Road	_							Sec III	- roadw	ork & ut	ilities - gas m	iin and val	ve cham	ber						
	valve chamber		-	-					_							& utilities - H									
5III10100	Sec III - roadwork & utilities - HEC cable duct and catchpit	110	05-Jun-15	15-Oct-15	Road																				
5III10120	Sec III - roadwork & utilities - sub-base	110	25-Jun-15	04-Nov-15	Road									sec.		lwork & utiliti		1							
SIII10140	Sec III - roadwork & utilities - Road kerb	110	15-Jul-15	23-Nov-15	Road					-					Sec III	- roadwork &	utilities - F	load ker	D						
SIII10160	Sec III - roadwork & utilities - flexible pavement	110	27-Jul-15	04-Dec-15	Road										Sec 1	II - roadwork	& utilities	- flexible	pavem	ent					
SIII10180	Sec III - roadwork & utilities - Road Lighting,	110	27-Jul-15	04-Dec-15	Road									1	Sec	III - roadwork	& utilities	- Road I	ighting,	TCSS D	ucts &Ti	raffic Signs			
SIII10200	TCSS Ducts &Traffic Signs Sec III - roadwork & utilities - pave footpath	100	07-Aug-15	04-Dec-15	Road	_					_				Sec 1	III - roadwork	& utilities	- pave f	otpath	oncrete					
511110220	concrete Sec III - roadwork & utilities - lay footpath	110	24-Aug-15	05-Jan-16	Road						•					Sec III - r	oadwork 8	utilities	lay foo	tpath co	oncrete	paver			
SIII10485	concrete paver Sec III - 1st Stage of Interim Traffic	16	15-Dec-15	05-Jan-16	Road										_	Sec III - 1	; st \$tage o	fInterim	Traffic	Arrangei	ment - r	niscellaneous w	orks		
	Arrangement - miscellaneous works Achievement of Section III of the Works					_										_									
5III10490		0		05-Jan-16	Road											•									
/orks after th	ne Box Culvert Reinstatement																								
SIII10300	Sec III - roadwork & utilities above box culvert K - storm water drain & subsoil drain	60	30-Jan-16	19-Apr-16	Road														Sec III -	roadwo	rk & util	ities above box	culvert K -	storm wa	ate
SIII10320	Sec III - roadwork & utilities above box culvert K - Watermain & Irrigation Mains	60	22-Feb-16	06-May-16	Road														Sec	III - roa	dwork 8	& utilities above	box culver	t K - Wat	terr
5III10340	Sec III - roadwork & utilities above box culvert K - gas main and valve chamber	60	04-Mar-16	19-May-16	Road															ec III -	roadwo	rk & utilities ab	ove box cu	lvert K - 🤉	gas
SIII10360	Sec III - roadwork & utilities above box culvert K	60	16-Mar-16	31-May-16	Road														1	Sec I	II - road	lwork & utilities	above box	culvert k	К-
SIII10380	 HEC cable duct and catchpit Sec III - roadwork & utilities above box culvert K 	60	24-Mar-16	08-Jun-16	Road	-											(Sec	III - ro	adwork & utiliti	es above b	ox culver	rt K
SIII10400	- sub-base Sec III - roadwork & utilities above box culvert K	60	30-Mar-16	15-Jun-16	Road															s	ec III -	roadwork & util	ities above	box culv	/ert
511110420	- Road kerb Sec III - roadwork & utilities above box culvert K		13-Apr-16	24-Jun-16	Road																	- roadwork &			
	- flexible pavement		-			_																			
5III10440	Sec III - roadwork & utilities above box culvert K - Road Lighting, TCSS Ducts &Traffic Signs		13-Apr-16	24-Jun-16	Road	_																- roadwork &			
SIII10460	Sec III - roadwork & utilities above box culvert K - pave footpath concrete	60	13-Apr-16	24-Jun-16	Road																	- roadwork & I			
SIII10480	Sec III - roadwork & utilities above box culvert K - lay footpath concrete paver	60	13-Apr-16	24-Jun-16	Road																Sec III	- roadwork &	utilities abo	ve box cu	ulve
ction V - Re	maining At-Grade Road; Remove 2nd Stage ITA	۹.																							
oadwork & U	Utilities													-				-							
V10020	Sec V - Roadwork & Utilities - Backfilling to	55	14-Jun-16	17-Aug-16	Road															-		Sec V -	Roadwork	& Utilitie:	:S -
V10040	pavement formation Sec V - Roadwork & Utilities - Stormwater	120	02-Aug-16	22-Dec-16	Road																		-		_
V10060	Drainage Works Sec V - Roadwork & Utilities - Sewerage Works	120	16-Aug-16	09-Jan-17	Road	_																			
	Sec V - Roadwork & Utilities - Watermain &		-			_																			_
V10080	Sec V - Roadwork & Utilities - Watermain & Irrigation Mains	120	30-Aug-16	23-Jan-17	Road																				
																								<u> </u>	
	 Current Milestone 																							Date	F
	Actual Work	1		۱۸/	arki					f F			/ D			r <mark>ks an</mark>	ا ا ام	:::+:	^				20-1	May-1	Э

Remaining Work Remaining Level of Effort (Ref. to RWP 4.0 - Sec III & V)

				Р	age : ´	1/2													
	Feb	Mar	Apr	2017 May	, Jun	Jul	Aug	Sep	Oct										
			+																
į	soil d																		
	tion N																		
į		hamber																	
du	ict an	d catchpit																	
2																			
er																			
		ement																	
d L	.ightii	ng, TCSS D	ucts &	Traffic Sig	ns														
e f	ootpa	th concret	e																
oc	tpath	concrete	paver																
to	pave	ment form	ation																
F	Roadv	vork & Util	ities - S	Stormwate	r Draina	ge Worl	ĸs												
с	V - R	oadwork 8	Utilitie	s - Sewer	age Wo	rks													
	Sec V	- Roadwo	rk & Ut	ilities - W	atermai	n & Irrig	ation Ma	ins											
			<u>i</u>						<u> </u>										
sic	on	Check	ed		A	pprov	ved												
٩																			
_	\square																		
	+																		

eSDEe						CEDD Contract No. HK/2012/08 Wan Chai Development Phase II Central - Wan Chai Bypass at Wan Chai West																Page : 2 / 2																			
ity ID	Activity Name	Orig Dur	Early Start	Early Finish	Road &																2	017																			
					Drain	Feb	o Mai	ır Ap	or M	lay Ji	un	Jul	Aug	Sep	Oct	Nov	Dec	; Jai	n F	eb	Mar	Apr	May	Jur	Ju	ul A	lug	Sep	Oct	Nov	Dec	Jan		Mar	Apr			n Ji	lul i	Aug	Sep C
SV10100	Sec V - Roadwork & Utilities - Gas Main	90	13-Sep-16	31-Dec-16	Road																												/ - Roadw								
SV10120	Sec V - Roadwork & Utilities - HEC cable duct and drawpit	90	28-Sep-16	16-Jan-17	Road																							-				-	Sec V - Roa	dwork	& Utilit	ies - H	EC cabl	e duct a	and dra	awpit	
SV10140	Sec V - Roadwork & Utilities - Telecom cable duct and drawpit	90	14-Oct-16	04-Feb-17	Road																												Sec V	- Road	work &	Utilitie	es - Tele	ecom ca	able duo	ict and o	drawpit
SV10160	Sec V - Roadwork & Utilities - lay & compact sub-base	110	28-Oct-16	14-Mar-17	Road																								-					Se	: V - Ro	adwor	k & Util	lities - la	ay & co	ompact	sub-base
SV10180	Sec V - Roadwork & Utilities - construct road kerb	110	05-Nov-16	22-Mar-17	Road																														ec V -	Roadw	vork & l	Jtilities ·	- constr	ruct roa	ad kerb
SV10200	Sec V - Roadwork & Utilities - flexible pavement	110	14-Nov-16	30-Mar-17	Road																									_					Sec V	- Road	lwork 8	k Utilitie	s - flex	kible pa	vement
SV10220	Sec V - Roadwork & Utilities - footpath paving block	110	24-Nov-16	11-Apr-17	Road																									•					Se	c V - R	loadwor	rk & Util	ilities - f	footpat	th paving
SV10240	Sec V - Roadwork & Utilities - concrete footpath	72	02-Dec-16	04-Mar-17	Road																										-			Sec V	- Road	lwork 8	& Utilitie	es - con	crete fo	ootpath	
SV10260	Sec V - Roadwork & Utilities - construct surface channel	72	02-Dec-16	04-Mar-17	Road																										_			Sec V	- Road	lwork 8	& Utilitie	es - con	istruct s	surface	channel
SV10280	Sec V - Roadwork & Utilities - Road Lighting, TCSS Ducts & Traffic Signs	72	11-Feb-17	12-May-17	Road																												-			— S	Sec V -	Roadwo	ork & L	Utilities	- Road L
SV10300	Achievement of Section V of the Works	0		12-May-17	Road										1								1								1										