

**DRAINAGE SERVICES DEPARTMENT**



**CONTRACT NO. DC/2011/06**

**REPROVISIONING OF BOUNDARY PATROL ROAD AND ASSOCIATED SECURITY FACILITIES BETWEEN PING YUEN RIVER AND PAK FU SHAN AND DRAINAGE WORKS IN NORTH DISTRICT**

**MONTHLY EM&A REPORT FOR ADVANCED WORKS UNDER EP-430/2011 (DECEMBER 2013)**

**PREPARED FOR SANG HING CIVIL CONSTRUCTORS CO., LTD.**

**Quality Index**

<b>Date</b>	<b>Reference No.</b>	<b>Prepared By</b>	<b>Approval By</b>
08 January 2014	TCS00599/12/600/R0190	 Ben Tam Environmental Consultant	 T. W. Tam Environmental Team Leader

<b>Version</b>	<b>Date</b>	<b>Description</b>
0	08 January 2014	First submission

This report has been prepared by Action-United Environmental Services & Consulting with all reasonable skill, care and diligence within the terms of the Agreement with the client, incorporating our General Terms and Conditions of Business and taking account of the resources devoted to it by agreement with the client. We disclaim any responsibility to the client and others in respect of any matters outside the scope of the above. This report is confidential to the client and we accept no responsibility of whatsoever nature to third parties to whom this report, or any part thereof, is made known. Any such party relies upon the report at their own risk.

Ref.: DSDBPRNDEM00\_0\_0222L.14

10 January 2014

By Post and Fax (2959 6079)

Action-United Environmental Services & Consulting  
Unit A, 20/F,  
Gold King Industrial Building,  
New Territories, Hong Kong

Attention: Mr. T.W. Tam

Dear Sir,

**Re: Contract No. DC/2011/06  
Reprovisioning of Boundary Patrol Road and Associated Security Facilities  
between Ping Yuen River and Pak Fu Shan and Drainage Works in North  
District  
EM&A report for Advanced Works under EP-430/2011 (December 2013)**

Reference is made to the Environmental Team's submission of the captioned report (Version 0) dated 8 January 2014 received through E-mail on 8 January 2014 for our review and comment.

Please be informed that we have no adverse comment on the captioned submission. We write to verify the captioned submission in accordance with Condition 5.4 in the captioned Environmental Permit.

Thank you for your kind attention and please do not hesitate to contact the undersigned should you have any queries.

Yours sincerely,



Roger Leung  
Independent Environmental Checker

c.c.	DSD	Mr. Eric Y.M. Cheng	by fax: 2827 8700
	SHCCCL	Mr. Raymond W.M. Yau	by fax: 2403 1162

Q:\Projects\DSDBPRNDEM00\02 Project Management\02 Corr\DSDBPRNDEM00\_0\_0222L.14.doc

## EXECUTIVE SUMMARY

### BREACHES OF ACTION AND LIMIT LEVELS

ES01. No environmental monitoring was conducted during the Reporting Period, no breaches of Action and Limit levels were therefore recorded.

### REPORTING CHANGES

ES02. No reporting changes were made during the Reporting Period.

### ENVIRONMENTAL COMPLAINTS LOG

ES03. No environmental complaint was registered during the Reporting Period. The complaint log is presented as follows:

Reporting Month	Environmental Complaint Statistics		
	Frequency	Cumulative	Complaint Nature
August 2012 to November 2013	0	0	Not Applicable
December 2013	0	0	Not Applicable

### ENVIRONMENTAL NOTIFICATIONS, SUMMONS AND PROSECUTIONS

ES04. No environmental notifications, summons and successful prosecutions were registered during the Reporting Period.

ES05. No non-compliance with the regulatory requirements was identified in the site inspection during the Reporting Period, including the regular joint site inspection by the ER, IEC, ET and Contractor. Defects of minor environmental significance were sometimes identified and normally rectified in-situ or within the specified time prior to the next site inspection.

### FORECAST OF IMPACT PREDICTIONS

ES06. Construction dust, noise and water quality continue to be the key environmental issues for the coming construction period.

### RECOMMENDATIONS

ES07. The Contractor is reminded to fully comply with all the relevant regulatory environmental requirements, including environmental mitigation measures stipulated in all the environmental ordinances, EM&A Manual, EMP and the associated WMP, effluent discharge license and the chemical waste producer registration, etc.

ES08. Particular attention is drawn to full implementation of air quality mitigation measures, in particular construction dust suppression measures during dusty construction activities under dry and windy conditions.

ES09. In addition, full implementation of the required water quality mitigation measures is reminded to eliminate adverse water quality impacts generated from surfaces of haul roads, stock pile of excavated materials, etc. during wet season.

ES10. Moreover, construction noise mitigation measures shall also be implemented during noisy construction works.

ES11. Furthermore, mosquito control should be ongoing to perform to prevent mosquito breeding on site.

**TABLE OF CONTENTS**

<b>1</b>	<b>BACKGROUND INFORMATION .....</b>	<b>1</b>
<b>2</b>	<b>SUMMARY OF EM&amp;A REQUIREMENTS .....</b>	<b>2</b>
<b>3</b>	<b>DATA MANAGEMENT AND DATA QA/QC CONTROL.....</b>	<b>4</b>
<b>4</b>	<b>ENVIRONMENTAL LICENSES AND PERMITS .....</b>	<b>4</b>
<b>5</b>	<b>CONSTRUCTION AND EM&amp;A ACTIVITIES .....</b>	<b>6</b>
<b>6</b>	<b>WASTE MANAGEMENT.....</b>	<b>5</b>
<b>7</b>	<b>SITE INSPECTION AND ENVIRONMENTAL AUDIT .....</b>	<b>7</b>
<b>8</b>	<b>ENVIRONMENTAL COMPLAINT, SUMMONS AND PROSECUTION .....</b>	<b>6</b>
<b>9</b>	<b>IMPACT FORECAST .....</b>	<b>7</b>
<b>10</b>	<b>CONCLUSIONS AND RECOMMENDECTIONS.....</b>	<b>8</b>

**LIST OF TABLES**

TABLE 4-1	STATUS OF ENVIRONMENTAL LICENSES AND PERMIT
TABLE 6-1	OBSERVATIONS OF SITE INSPECTION DURING THE REPORTING PERIOD
TABLE 7-1	SUMMARY OF ENVIRONMENTAL COMPLAINTS
TABLE 7-2	SUMMARY OF ENVIRONMENTAL SUMMONS
TABLE 7-3	SUMMARY OF ENVIRONMENTAL PROSECUTION

**LIST OF ANNEXES**

ANNEX A	LOCATION PLAN FOR THE WORKS
ANNEX B	ENVIRONMENTAL MANAGEMENT ORGANIZATION AND COMMUNICATION LINES
ANNEX C	IMPLEMENTATION SCHEDULE FOR ENVIRONMENTAL MITIGATION MEASURES
ANNEX D	THREE-MONTH ROLLING PROGRAM
ANNEX E	MONTHLY SUMMARY WASTE FLOW TABLE/SUMMARY TABLE AND WORK PROCESSES OR ACTIVITIES REQUIRING TIMBER FOR TEMPORARY WORKS

## 1 BACKGROUND INFORMATION

### 1.1 DSD CONTRACT NO. DC/2011/06

1.1.1 Sang Hing Civil Contractors Company Limited (hereinafter “SHCCCL” or “the Contractor”) has been awarded by Drainage Services Department of the HKSAR Government (hereinafter “DSD” or “the Engineer”) since 31 March 2012 DSD Contract No. DC/2011/06 – Re-provisioning of Boundary Patrol Road and Associated Security Facilities between Ping Yuen River and Pak Fu Shan and Drainage Works in North District (hereafter “the Contract”).

1.1.2 The Contract comprises:

A. **Re-provisioning of Boundary Patrol Road and Associated Security Facilities between Ping Yuen River and Pak Fu Shan**, which is one of the two parts of Regulation of Shenzhen River Stage 4, i.e. the Advanced Works within the HKSAR to be implemented under Environmental Permit No. EP-430/2011 (hereinafter “EP-430/2011”) (hereinafter “the Advanced Works under EP-430/2011” or “the Works”). The Works include:

- 1) Re-provisioning of approximately 4.3 kilometres (km) long and 3.5 metres (m) wide boundary patrol road between Ping Yuen River and Pak Fu Shan;
- 2) Re-provisioning of approximately 4.3 km long primary boundary fence with associated lighting and Fence Protection System between Ping Yuen River and Pak Fu Shan;
- 3) Re-provisioning of the Hong Kong Police Force Lo Fong Bridge Post; and
- 4) Construction of about 3.3 km long secondary boundary fence.

B. **Drainage Works in North District to be implemented under Environmental Permit No. EP-277/2007/A**, which has been commenced in May 2012 and is scheduled to be completed by May 2013, including

- 1) Construction of about 400m of drainage channel at Man Uk Pin under Environmental Permit No. EP-277/2007/A (hereinafter “EP-277/2007/A”);
- 2) The associated ancillary works including drainage and landscaping works.

C. **Drainage Works in North District**, which is a non-designated project of drainage works at Ma Wat Wai in North District for construction of about 110 m of drainage channel at Ma Wat Wai.

1.1.3 Drawing of the area within the Works showing is shown in **Annex A**, whereas project organization, environmental management structure and communication lines, including contacts of key personnel under the Contract as well as the 3-monthly rolling program covering the second month of the construction of the Works are shown in **Annex B**.

1.1.4 Construction of the Advanced Works under EP-430/2011 has been commenced on 21 August 2012 after site clearance and the associated preparation works as well as completion of submission required under EP-430/2011. The Works is anticipated to be completed in August 2014 within 29 months.

### 1.2 CONCURRENT PROJECTS IN THE VICINITY OF THE WORKS

1.2.1 The following projects are anticipated to be carried out concurrently in the vicinity of the Works:

- 1) The River Modification Works within HKSAR, which is part of the Regulation of Shenzhen River Stage 4 and to be implemented under EP-430/2011, is scheduled for commencement in mid-2013.
- 2) The development of the proposed Liantang/Heung Yuen Wai Boundary Control Point (hereinafter “the LT/HYW BCP”) and the associated works. It is anticipated that the construction of the LT/HYW BCP and connecting roads will commence at the end of 2013 and be completed in end 2018. The planned construction period for the resite of Chuk Yuen Village is from late 2010 to early 2012 for population intake by early 2013.
- 3) Construction of a Secondary Boundary Fence and New Sections of Primary Boundary fence and Patrol Road. Based on the advice from ArchSD, the latest tentative construction

programme shall be from end 2011 to early 2013 (section from Ng Tung River to Ping Yuen River) and from end 2011 to end 2013 (section from Pak Fu Shan to Lin Ma Hang Road).

- 4) Drainage Improvement in Northern New Territories, Package C (Remaining Works). The construction work is scheduled to commence in late 2012 and completed by 2016.

### **1.3 CUMULATIVE ENVIRONMENTAL IMPACTS**

- 1.3.1 As concluded in the EIA report for Regulation of Shenzhen River Stage 4, adverse environmental impacts generated from the River Modification Works within HKSAR are predicted to be minimal provided the required environmental mitigation measures are fully implemented.
- 1.3.2 There is a potential of cumulative environmental impacts during construction phase, including construction dust, noise, water quality, waste, ecology and landscape and visual, to be generated from the concurrent works LT/HYW BCP and the associated works as well as construction of a secondary boundary fence and new sections of primary boundary fence and patrol road.
- 1.3.3 However, as the schedules and programs of those concurrent projects are subject to private initiatives and market-driven factors, it is not possible to assess the cumulative impact at this stage.
- 1.3.4 On the other hand, the Drainage Improvement in Northern New Territories, Package C (Remaining Works) project is subject to another future detailed EIA Study and detailed construction program is not available to date. The cumulative impact cannot be assessed at this stage. However, since the drainage improvement works is located at about 500 m from the Site and given its nature and scale of works, adverse cumulative environmental impacts are not anticipated.

## **2 SUMMARY OF EM&A REQUIREMENTS**

### **2.1 CONSTRUCTION ACTIVITIES UNDER THE WORKS**

#### **2.1.1 Construction activities under the Works comprise:**

- 1) Approximately 4,300 m of 3.5 m wide Boundary Patrol Road on filled embankment along the Shenzhen River from Ping Yuen River estuary and Pak Fu Shan, Ta Kwu Ling;
- 2) Approximately 4,300 m of Primary Boundary Fence with XPM mesh;
- 3) Approximately 3,300 m of Secondary Boundary Fence with XPM mesh;
- 4) Approximately 4,300 m of border security lighting system including the associated electrical and mechanical works;
- 5) 4 box culverts and 12 drainage pipes under the proposed Boundary Patrol Road, and the associated inlets and outlets;
- 6) Reconstruction of Lo Fong Bridge Post for Hong Kong Police Force;
- 7) Peripheral drainage system associated with the above items;
- 8) Irrigation systems including associated electrical and mechanical works;
- 9) Landscaping works and environmental mitigation works;
- 10) Other ancillary works associated with the above items;

#### **2.1.2 The construction areas under the Works are divided into the following three portions:**

- 1) Portion A – Area between CH\_R 0+000 and 2+050 for re-provisioning of Boundary Patrol Road and the associated security facilities
- 2) Portion B – Area between CH\_R 2+050 and 2+840 for re-provisioning of Boundary Patrol Road and the associated security facilities
- 3) Portion C – Area between CH\_R 2+840 and 4+300 approximately for re-provisioning of Boundary Patrol Road and the associated security facilities

## **2.2 EM&A REQUIREMENTS FOR THE WORKS**

### ***CONSTRUCTION PHASE***

- 2.2.1 The EIA report has assessed potential environmental impacts to be generated from the Works. Conclusions and recommendations for EM&A during construction of the Works are presented in the EIA report and the associated Updated EM&A Manual. They are summarized as follows.
- 2.2.2 Environmental monitoring and audit for air quality, construction noise, water quality, ecology, cultural heritage as well as landscape and visual is required during construction phase of the River Modification Works.

### ***OPERATIONAL PHASE***

- 2.2.3 No environmental monitoring and audit for air quality, construction noise, water quality, ecology, cultural heritage as well as landscape and visual is required during operational phase of the Works.

### ***BASELINE MONITORING AND ENVIRONMENTAL QUALITY CRITERIA***

- 2.2.4 Baseline monitoring is required for establishment of the environmental quality criteria, i.e. Action/limit Levels, for the River Modification Works under EP-430/2010. The baseline monitoring was conducted upon confirmation of the acquirement of all access to the monitoring locations for air quality including 1-Hr and 24-Hr TSP and construction noise.

### ***EVENT & ACTION PLAN***

- 2.2.5 Event and Action Plan recommended in the EIA and the associated approved EM&A Manual will be implemented during River Modification Works under EP-430/2010 as a monitoring and response mechanism for handling exceedances of environmental standards during the construction phase in collaboration with relevant parties of other concurrent projects in the vicinity.
- 2.2.6 In addition, day-to-day site inspection and environmental audit by related parties of the environmental management under the Works is crucial to regularly review on compliance with legal and contractual requirements of the Works.
- 2.2.7 Equally important is proper handling of environmental complaint, enquiries and requests for information as appropriate.

### ***SITE INSPECTION AND ENVIRONMENTAL AUDIT***

- 2.2.8 The ET will undertake site inspection of on-site practices and procedures each month. Joint site inspection and environmental audit is also required to be conducted by related parties of the environmental management to verify the implementation status and evaluate the effectiveness and stability of the environmental mitigation measures, in collaboration with relevant parties of other concurrent projects in the vicinity.
- 2.2.9 Details of the scope and range of issues to be designed and addressed in the site inspection and environmental audit protocols are presented in Section 6.

### ***ENVIRONMENTAL REPORTING OF THE WORKS***

- 2.2.10 In order to ease environmental reporting of the Contract, it has been agreed among the Engineer, IEC, Contractor and ET that the environmental reporting for the Contract is split into three stand-alone reports, namely Environmental Report for Advanced Works under EP-430/2011, EM&A Report for Drainage Works under EP-277/2007/A and EM&A Report for Drainage Works at Ma Wat Wai. They will be prepared and submitted separately.
- 2.2.11 This is the *seventeenth* month of EM&A Monthly Report for the Works (herein after “this Report”), covering construction period from *1 to 31 December 2013* (hereinafter “the Reporting Period”).

### 3 DATA MANAGEMENT AND DATA QA/QC CONTROL

- 3.1 The impact monitoring data is handled by the ET's systematic data recording and management, which complies with an in-house certified (ISO 9001:2000) Quality Management System. Standard Field Data Sheet (FDS) are used in the EM&A program.
- 3.2 Where appropriate, the monitoring data recorded in the equipment e.g. 1-Hour TSP meters and noise meters are downloaded directly at the end of each monitoring day. The downloaded monitoring data are input into a computerized database properly maintained by the ET. The laboratory results are input directly into the computerized database and QA/QC checked by personnel other than those who input the data.
- 3.3 For monitoring activities which require laboratory analysis, the responsible laboratory, ALS, follows the QA/QC requirements as set out under their HOKLAS scheme for all laboratory testing.

### 4 ENVIRONMENTAL LICENSES AND PERMITS

#### 4.1 STATUS OF ENVIRONMENTAL LICENSES AND PERMIT

- 4.1.1 Status of environmental licenses and permit is summarized in the following *Table 4-1*.

**Table 4-1 Status of Environmental Licenses and Permit**

Permit Type	Licenses / Permit No.	Date Issued by EPD	Expiry Date	Concerned Location	Status
Environmental Permit	EP-430/2011	09 Jul 2007	N.A.	Ping Yuen River	Valid
Notification pursuant to Section 3(1) of the Air Pollution Control Ordinance (APCO) Construction Dust Regulation	N.A.	N.A.	N.A.	Contract Area: Man Uk Pin, Ma Wat Wai & Ping Yuen River	Valid
Account for Disposal of Construction Waste	7015003	07 May 2012	N.A.	Contract Area: Man Uk Pin, Ma Wat Wai & Ping Yuen River	Valid
Application for Wastewater Discharge License under Water Pollution Control Ordinance (WPCO)	W5/1G41/1	03 Oct 2012	31 Oct 2017	Portions A, B and C near Lin Ma Hang Road, Ta Kwu Ling, N.T.	Valid
Register as a Chemical Waste Producer under Waste Disposal Ordinance	5123-642-S3565-03	03 Oct 2012	N.A.	Portions A, B and C near Lin Ma Hang Road, Ta Kwu Ling, N.T.	Valid

#### 4.2 SUBMISSION OF LAYOUT PLANS

- 4.2.1 Pursuant to *Clause 2.7* of EP-430/2011, 3 sets of the Layout Plans of scale 1:1000 with an explanatory statement detailing the works schedule, works boundary and the works areas have been submitted since 21 July 2012 to the Director of Environmental Protection of the HKSAR Government (hereinafter "DEP") upon certification by the ET Leader and verification by the Independent Environmental Checker (hereinafter "the IEC") as confirming to the information and recommendations contained in the EIA report.



#### **4.3 SUBMISSION OF LANDSCAPE PLAN**

4.3.1 Pursuant to *Clause 2.8* of EP-430/2011, 3 sets of the Landscape Plan have been submitted to the Director of Environmental Protection of the HKSAR Government (hereinafter “DEP”) since 21 July 2012 upon certification by the ET Leader and verification by the IEC as confirming to the information and recommendations contained in the approved EIA report.

#### **4.4 SUBMISSION OF UPDATED ENVIRONMENTAL MONITORING AND AUDIT MANUAL**

4.4.1 Pursuant to *Clause 2.10* of EP-430/2011, an updated environmental monitoring and audit manual for the Project, namely Updated EM&A Manual for Advanced Works under EP-430/2011 (hereinafter “the Updated EM&A Manual”), has been submitted since 21 May 2012 to the DEP upon certification by the ET Leader and verification by the Independent Environmental Checker (hereinafter “the IEC”) as confirming to the information and recommendations contained in the approved EIA report.

### **5 CONSTRUCTION AND EM&A ACTIVITIES**

#### **5.1 CONSTRUCTION ACTIVITIES**

5.1.1 Detailed construction program is presented in *Three-Month Rolling Program* enclosed in **Annex D**, including construction activities listed below:

- 1) Setting out of structure /fence/gate;
- 2) Underground utilities detection;
- 3) Construction of Box Culvert No.1;
- 4) Liaise with various utility undertakers and villagers;
- 5) Construction of Primary Fence footing and Secondary Fence footing;
- 6) Erection of permanent security fence
- 7) Pruning, felling and transplanting of existing tree;
- 8) Extension of existing drain pipe;
- 9) Backfilling along constructed boundary patrol road;
- 10) Construction of Switch Room, Pillar box and Lo Fong Bridge Post Guard House;
- 11) Installation of Lamp Pole;
- 12) Construction of U-Channel;
- 13) Laying of CLP (11kV) Cable (By CLP);
- 14) Installation of underground utility ducting;
- 15) Installation of E&M draw pit;
- 16) Cable Laying by EMSD;
- 17) Setting out the site boundary line and initial survey;
- 18) Construction of Manhole;
- 19) Construction of Chain Link fence at Ch 3300 across the SZ River; and
- 20) Site formation and construction of Retain Wall Bay 12-22 (base slab).

#### **5.2 EM&A ACTIVITIES**

##### ***BASELINE MONITORING AND ESTABLISHMENT OF ENVIRONMENTAL QUALITY CRITERIA***

5.2.1 Baseline environmental monitoring of the air quality, construction noise and water quality for the River Modification Works within the HKSAR was completed and the associated environmental quality criteria, i.e. A/L Levels of the monitored parameters, were proposed in the baseline monitoring report, which was submitted to EPD upon verification by the IEC.

**CONSTRUCTION IMPACT MONITORING**

5.2.2 No environmental monitoring was conducted during the Reporting Period.

**6 WASTE MANAGEMENT**

6.1 Pursuant to the Updated EM&A Manual, the waste management during the Reporting Period was carried out in close accordance with the Waste Management Plan, which has been submitted since 20 August 2012 to the Engineer for approval prior to commencement of the Works upon certification by the ET Leader and verification by the IEC.

6.2 The quantity of waste for disposal or reuse during the Reporting Period is summarized in *Monthly Summary of Waste Flow Table* in **Annex K**.

6.3 *Work Processes or Activities Requiring Timber for Temporary Works* is also enclosed in **Annex K**.

6.4 To ensure satisfactory performance of the waste management, the Contractor is reminded to comply with all relevant regulatory waste management requirements, including as appropriate those stipulated in the effluent discharge licenses and chemical waste producer registration, etc. The Contractor is also required to fully implement all the waste management mitigation measures recommended in the Updated EM&A Manual.

6.5 Where possible, construction materials should be reused on-site as far as practicable to reduce the construction waste, which should then be sorted or classified on site for proper recycling and disposal as recommended in the Environmental Management Plan and the associated Waste Management Plan.

**7 SITE INSPECTION AND ENVIRONMENTAL AUDIT**

**7.1 FINDINGS/DEFICIENCIES OF THE SITE INSPECTION AND ENVIRONMENTAL AUDIT**

7.1.1 Monthly site inspection and environmental audit was jointly conducted by representatives of the Engineer, IEC, ET and Contractor in close accordance with the Updated EM&A Manual.

7.1.2 During the Reporting Period, the ET’s site inspection and environmental audit was conducted on **11 December 2013**. Findings or deficiencies identified during the site inspection and environmental audit are summarized in **Table 6-1**.

**Table 6-1 Observations of Site Inspection during the Reporting Period**

Date	Findings / Deficiencies	Follow-Up Status
11 December 2013	<ul style="list-style-type: none"> <li>No adverse environmental impacts were observed during the site inspection. However, full implementation of the required environmental mitigation measures is reminded.</li> </ul>	Not required for general reminders.

7.1.3 Site inspection checklists completed and endorsed by all related parties are kept by the ET and are available for inspection upon request.

**7.2 DISCUSSION AND CONCLUSION**

7.2.1 No deficiencies and non-compliance with the relevant regulatory requirements were identified during the regular site inspection and environmental audit, indicating no adverse environmental impacts were generated from the construction of the Works.

**7.3 RECOMMENDATION**

7.3.1 Although no adverse environmental impacts were identified during the regular site inspection and

environmental audit conducted by representatives of the Engineer, IEC, ET and Contractor, but full implementation of the recommended environmental mitigation measures, in particular wheel washing of the construction vehicles prior to exit the site. Addition, water spraying of the site temporary roads and public roads should be kept to prevent construction dust emission.

## 8 ENVIRONMENTAL COMPLAINT, SUMMONS AND PROSECUTION

### 8.1 ENVIRONMENTAL COMPLAINTS

8.1.1 No environmental complaint was received during the Reporting Period. Summary of environmental complaint is presented in *Table 7-1* below.

**Table 7-1 Summary of Environmental Complaints**

Reporting Month	Environmental Complaint Statistics		
	Frequency	Cumulative	Complaint Nature
August 2012 to November 2013	0	0	Not Applicable
December 2013	0	0	Not Applicable

### 8.2 ENVIRONMENTAL SUMMONS

8.2.1 No environmental summons was received during the Reporting Period. Summary of environmental summons is presented in *Table 7-2* below.

**Table 7-2 Summary of Environmental Summons**

Reporting Month	Environmental Summons Statistics		
	Frequency	Cumulative	Nature
August 2012 to November 2013	0	0	Not Applicable
December 2013	0	0	Not Applicable

### 8.3 ENVIRONMENTAL PROSECUTION

8.3.1 No environmental prosecution was received during the Reporting Period. Summary of environmental prosecution is presented in *Table 7-3* below.

**Table 7-3 Summary of Environmental Prosecution**

Reporting Month	Environmental Prosecution Statistics		
	Frequency	Cumulative	Nature
August 2012 to November 2013	0	0	Not Applicable
December 2013	0	0	Not Applicable

## 9 IMPACT FORECAST

### 9.1 KEY ENVIRONMENTAL ISSUES

9.1.1 Potential environmental issues to be considered in the coming month include:-

- 1) **Air quality** Dusty construction activities may generate potential construction dust impacts and dry/loose/exposure soil surface/stock piles of dusty material within the site may pose fugitive dust under dry and windy weather conditions;
- 2) **Water quality** Surface runoff during /rain may pollute the surrounding water bodies with high suspended solids or turbidity, and concrete washing may increase alkalinity or pH value of the water bodies;
- 3) **Chemical waste** Oil & grease spillage or leakage from construction equipment and the associated oil containers within site areas may contaminate lands or other environment;

- 4) **Construction Noise** Construction noise impacts may be caused by noisy construction activities;

## **9.2 ENVIRONMENTAL MITIGATION MEASURES FOR THE COMING MONTH**

9.2.1 Environmental Mitigation Measures to be considered in the coming month includes:-

- 1) Dust suppression measures, in particular proper watering during dusty construction activities under dry and windy conditions, should be fully implemented;
- 2) Sedimentation or silt removal facilities of adequate capacity should be used for proper treatment of any site effluent generated from stockpiles of construction materials/waste or dusty haul roads or excavated surfaces within the site during storm rain, prior to discharge to nearby water bodies in order to remove suspended solids or turbidity;
- 3) Good management of chemical wastes should be maintained;
- 4) Follow-up actions for any defects identified during regular site inspection should be promptly taken to rectify the situation; and
- 5) Special attention is drawn to implementation of the construction noise mitigation measures during noisy construction works.

## **10 CONCLUSIONS AND RECOMMENDATIONS**

### **10.1 CONCLUSIONS**


- 10.1.1 No environmental monitoring was conducted during the Reporting Period.
- 10.1.2 No non-compliance with the regulatory requirements was recorded in the regular site inspection and environmental audit jointly conducted by representatives of the Engineer, IEC, ET and Contractor during the Reporting Period, indicating no adverse environmental impacts were generated from construction activities under the Works during the Reporting Period.
- 10.1.3 Defects of minor environmental significance were sometimes observed. They were normally rectified in-situ or within the specified time prior to the next site inspection.
- 10.1.4 No environmental complaint, notification of summons or successful prosecution was registered during the Reporting Period.

### **10.2 RECOMMENDATION**

- 10.2.1 The Contractor is reminded to fully comply with all the relevant regulatory environmental requirements, including environmental mitigation measures stipulated in all the environmental ordinances, EM&A Manual, EMP and the associated WMP, effluent discharge license and the chemical waste producer registration, etc.
- 10.2.2 Attention is drawn to implementation of air quality mitigation measures, in particular wheel washing of the construction vehicles prior to exit the site. Addition, water spraying of the site temporary roads and public roads should be kept to prevent construction dust emission.
- 10.2.3 In addition, full implementation of the required water quality mitigation measures is reminded to eliminate adverse water quality impacts generated from site water runoff, surfaces of haul roads, stock pile of excavated materials, etc.
- 10.2.4 Attention is also drawn to implementation of the construction noise mitigation measures during noisy construction works.


***ANNEX A***

***LOCATION PLAN FOR THE WORKS***

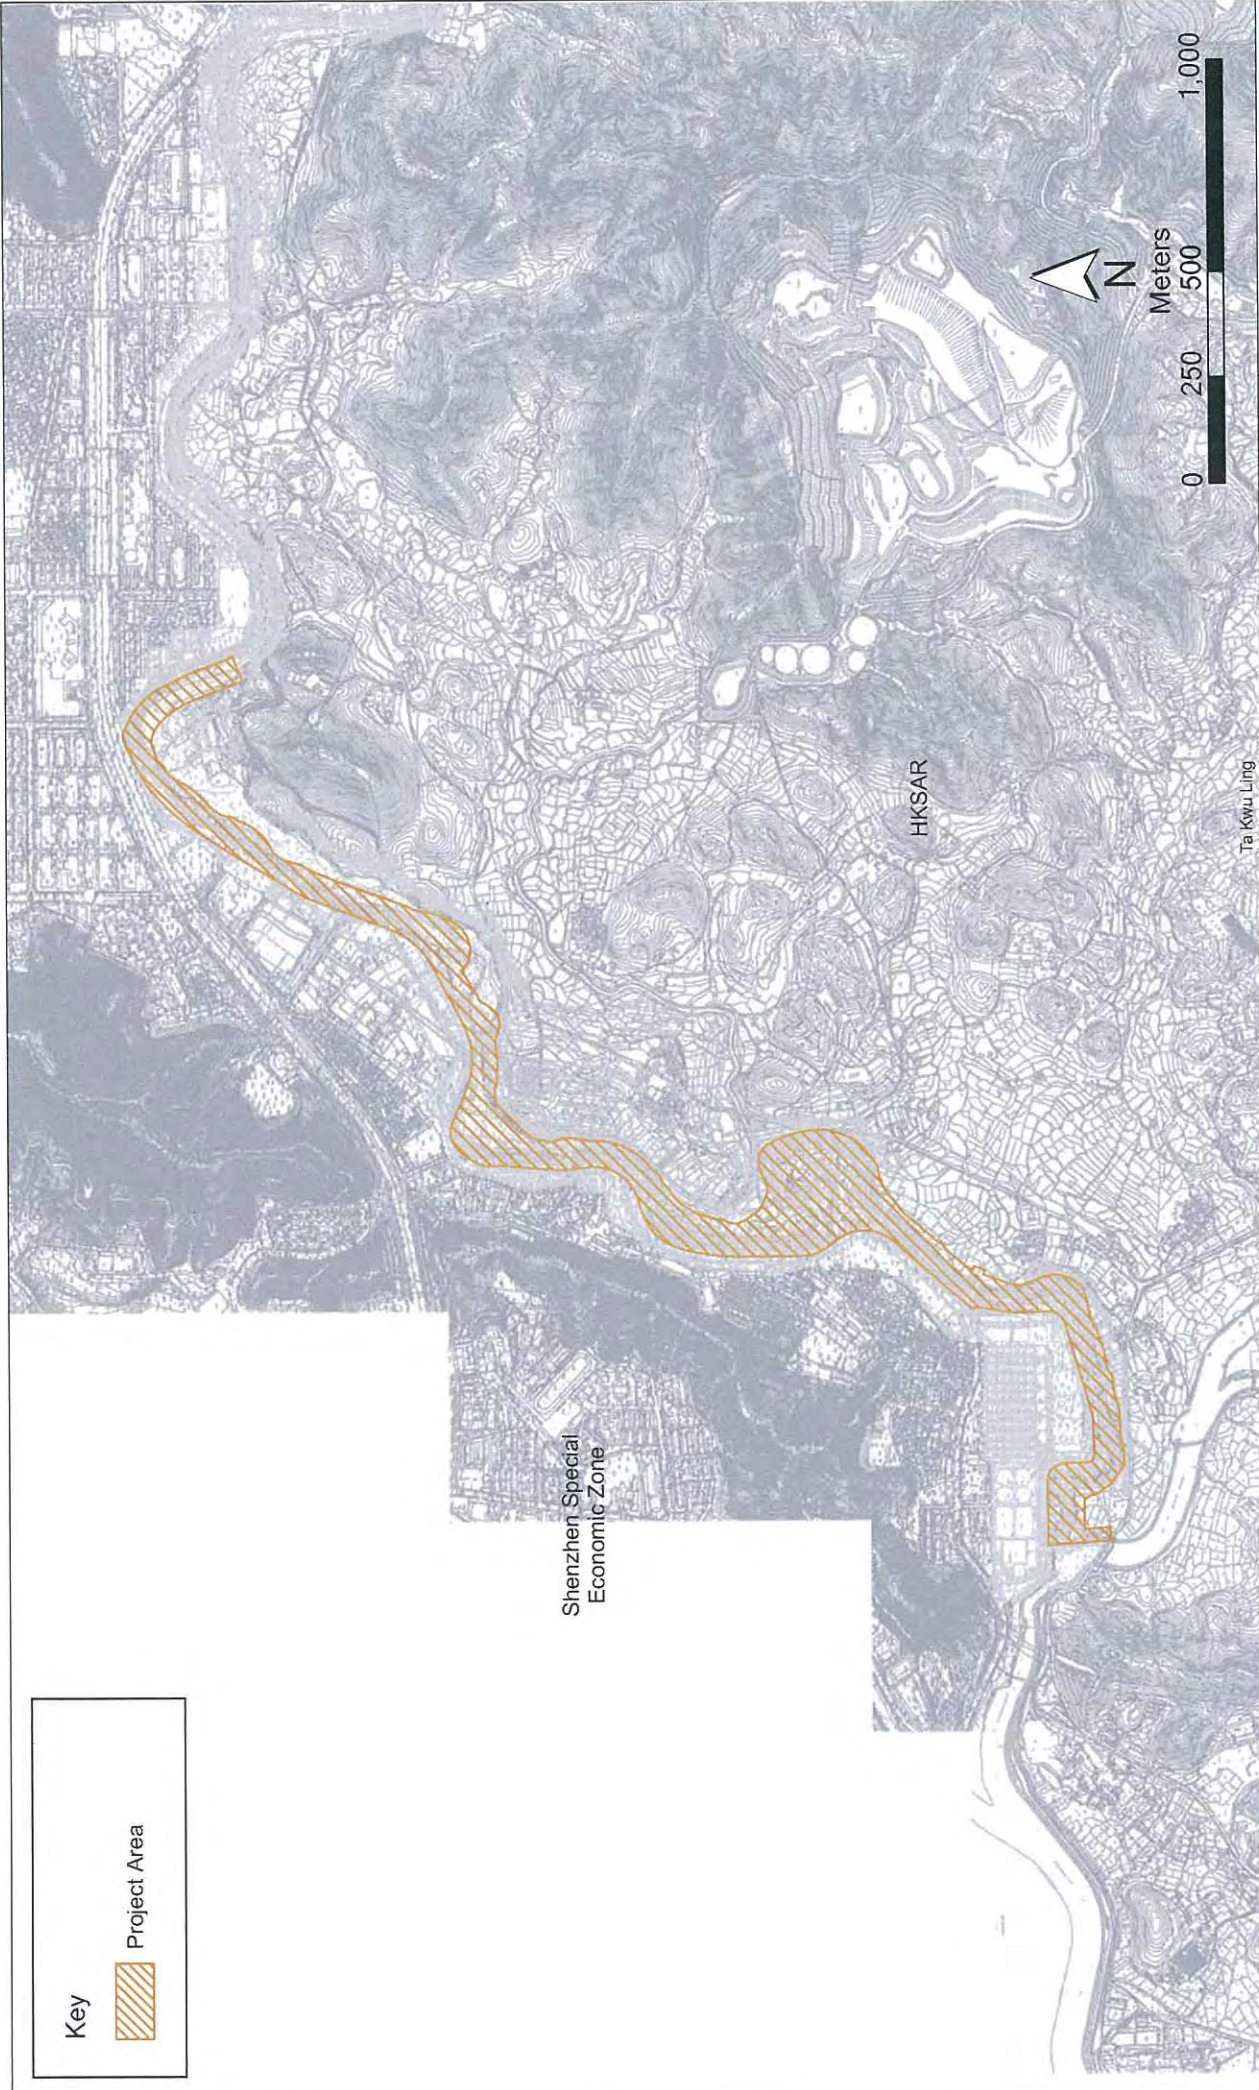


Location of Project Site

Figure A1-1

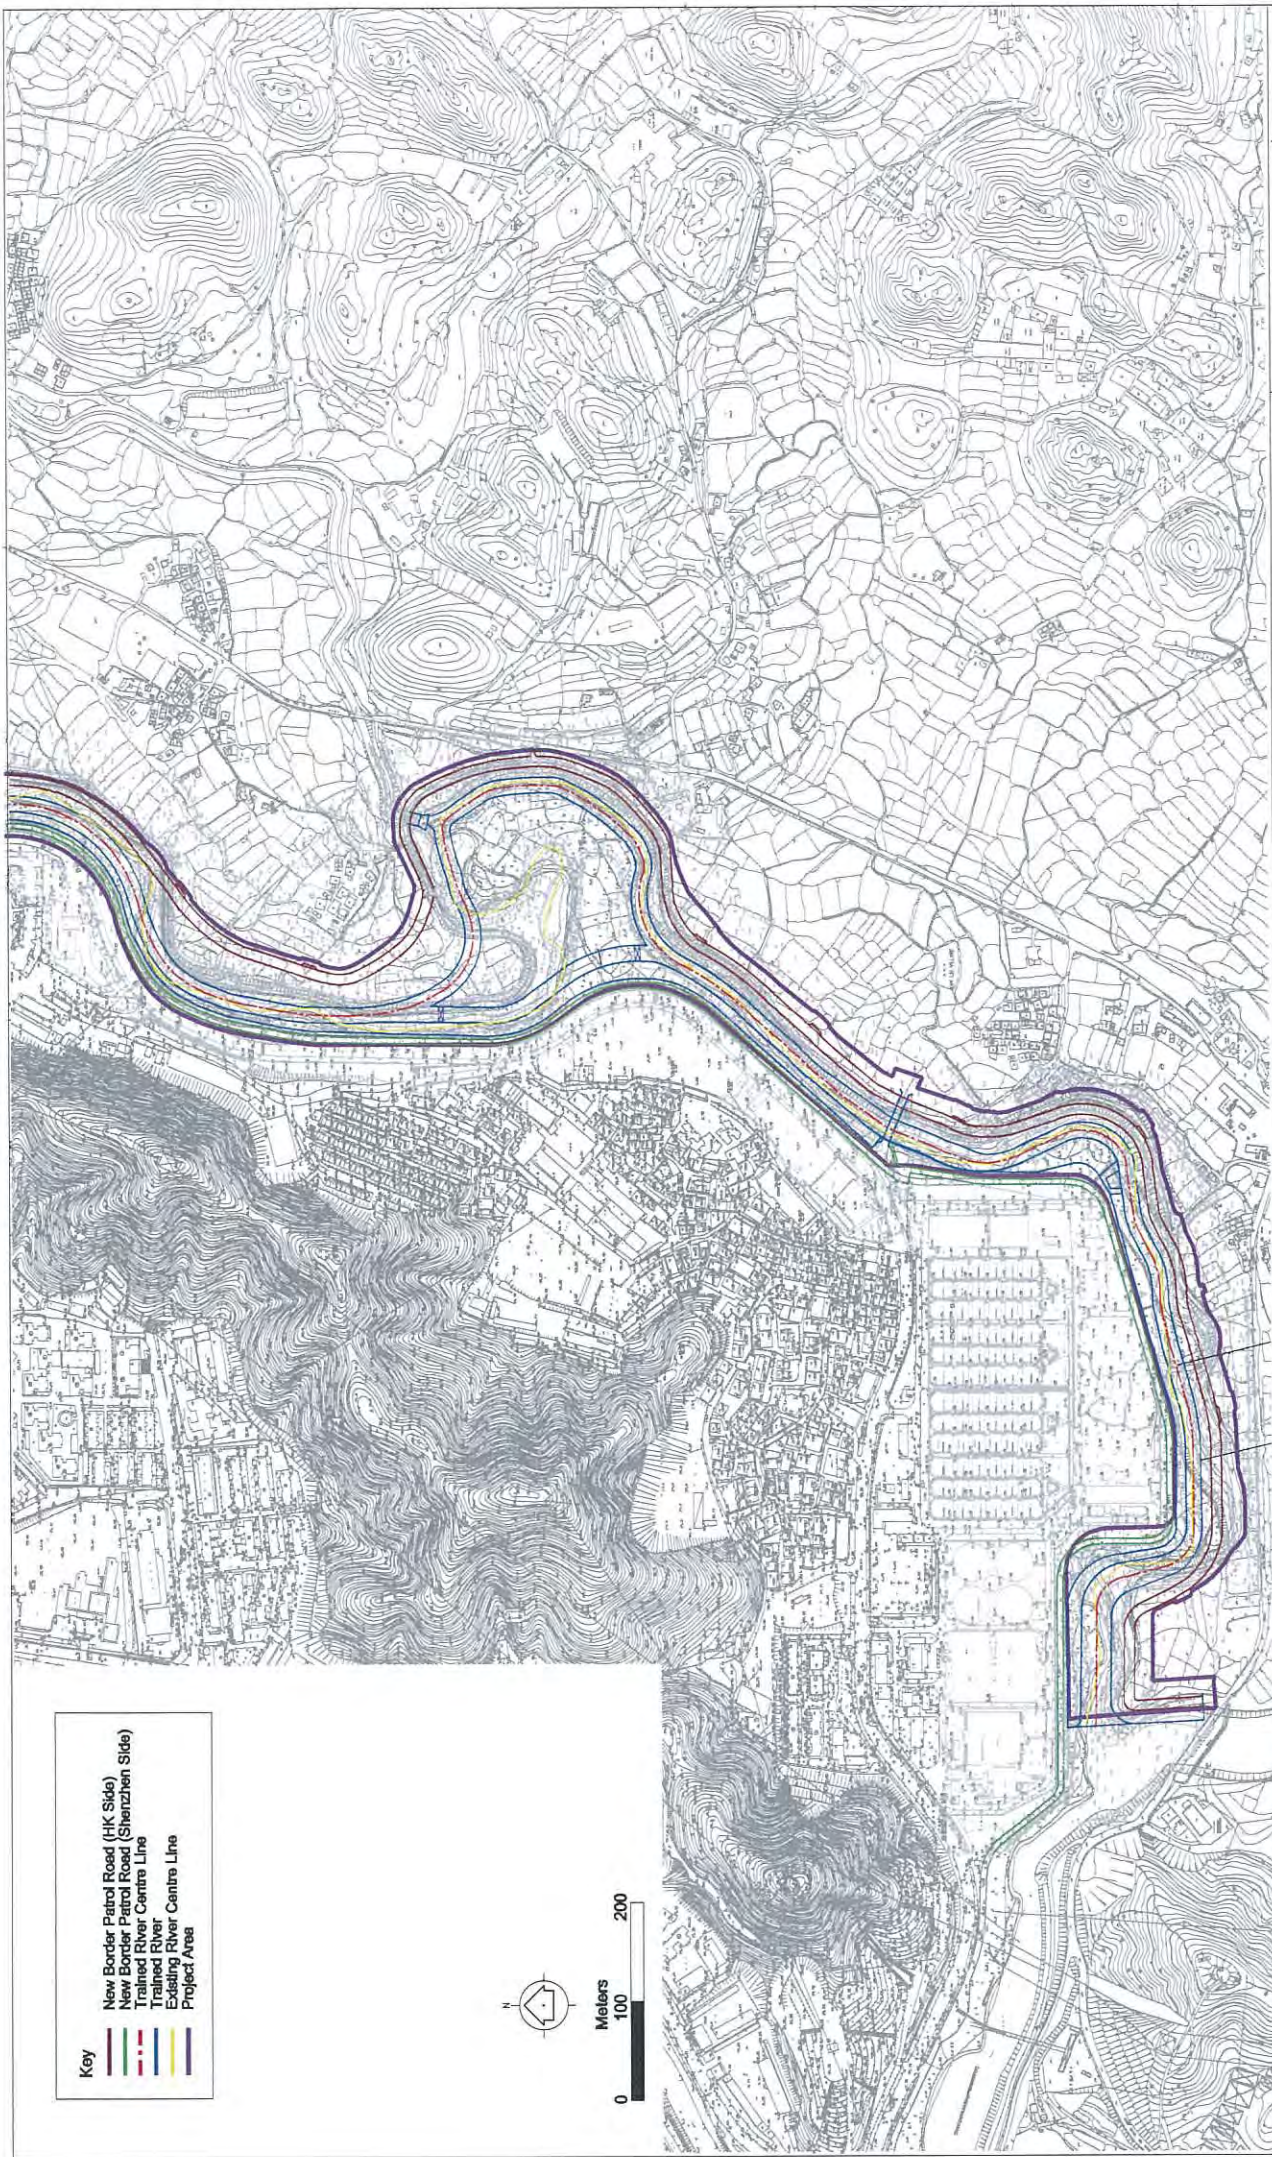


- Key**
-  New Border Patrol Road (HK Side)
  -  New Border Patrol Road (Shenzhen Side)
  -  Trained River Centre Line
  -  Existing River Centre Line
  -  Project Area



General Layout and Extent of the Trained River  
(1 of 2)

Figure A1-2

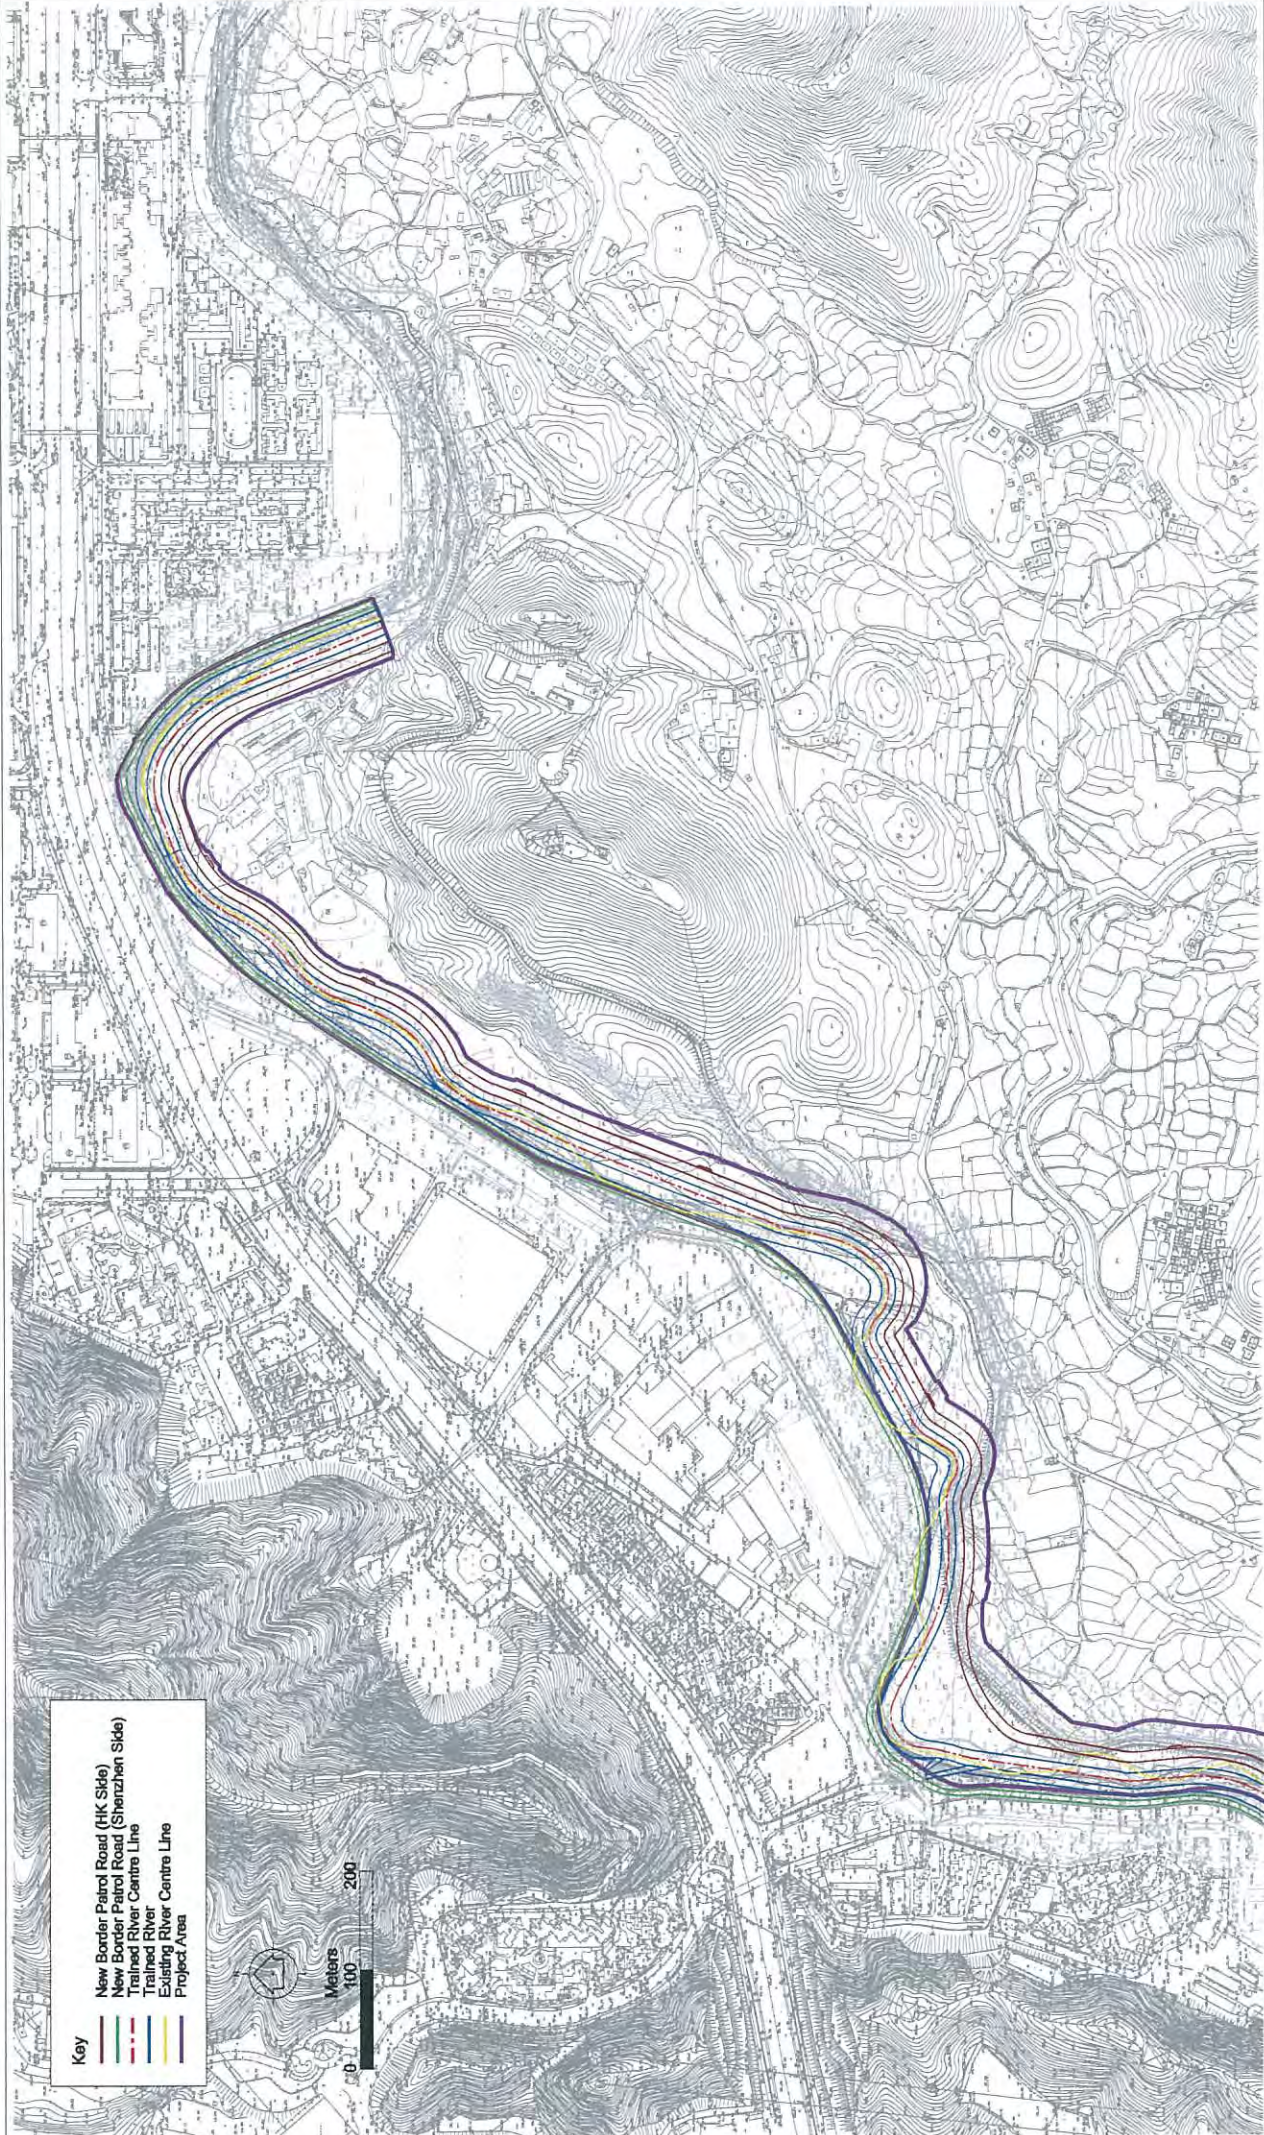

General Layout and Extent of the Trained River  
(2 of 2)

Figure A1-2



**NOTES:**

- GRID LINES ARE NORTH-KONG GRID 1980.
- ALL LEVELS ARE IN METRES AND REFERRED TO M.S.L.
- FOR SETTING OUT DETAILS OF SITE LIMITS, REFER TO DRAWING NO. DDP/DC1106/11011 TO DDP/DC1106/11022.
- FOR DETAILS OF AREAS B1, B2, B3 & B4 REFER TO DRAWING NO. DDP/DC1106/11022.

**LEGEND:**

- LIMIT OF THE SITE
- PROTION A
- PROTION B
- AREA B1
- AREA B2
- AREA B3
- AREA B4
- PROTION C

OR A PROVISION ON-LINE FOR BORDER ROAD

NO.	DATE	DESCRIPTION	INITIALS
1		DESIGNED	
2		DRAWN	
3		CHECKED	
4		APPROVED	

contract no. DC/2011/06  
 file no. DP/8/5018GB  
 project no. 5018GB



PREPROVISIONING OF BOUNDARY PATROL ROAD AND ASSOCIATED SECURITY FACILITIES BETWEEN PING YUEN RIVER AND PAK FU SHAN AND DRAINAGE WORKS IN NORTH DISTRICT

drawing title

SCOPE OF WORKS AT PORTION A, B AND C OF THE SITE

SHEET 1 OF 3  
 drawing no. DDP/DC1106/11011  
 scale 1:15,000

COPYRIGHT RESERVED  
 office DRAINAGE PROJECTS DIVISION

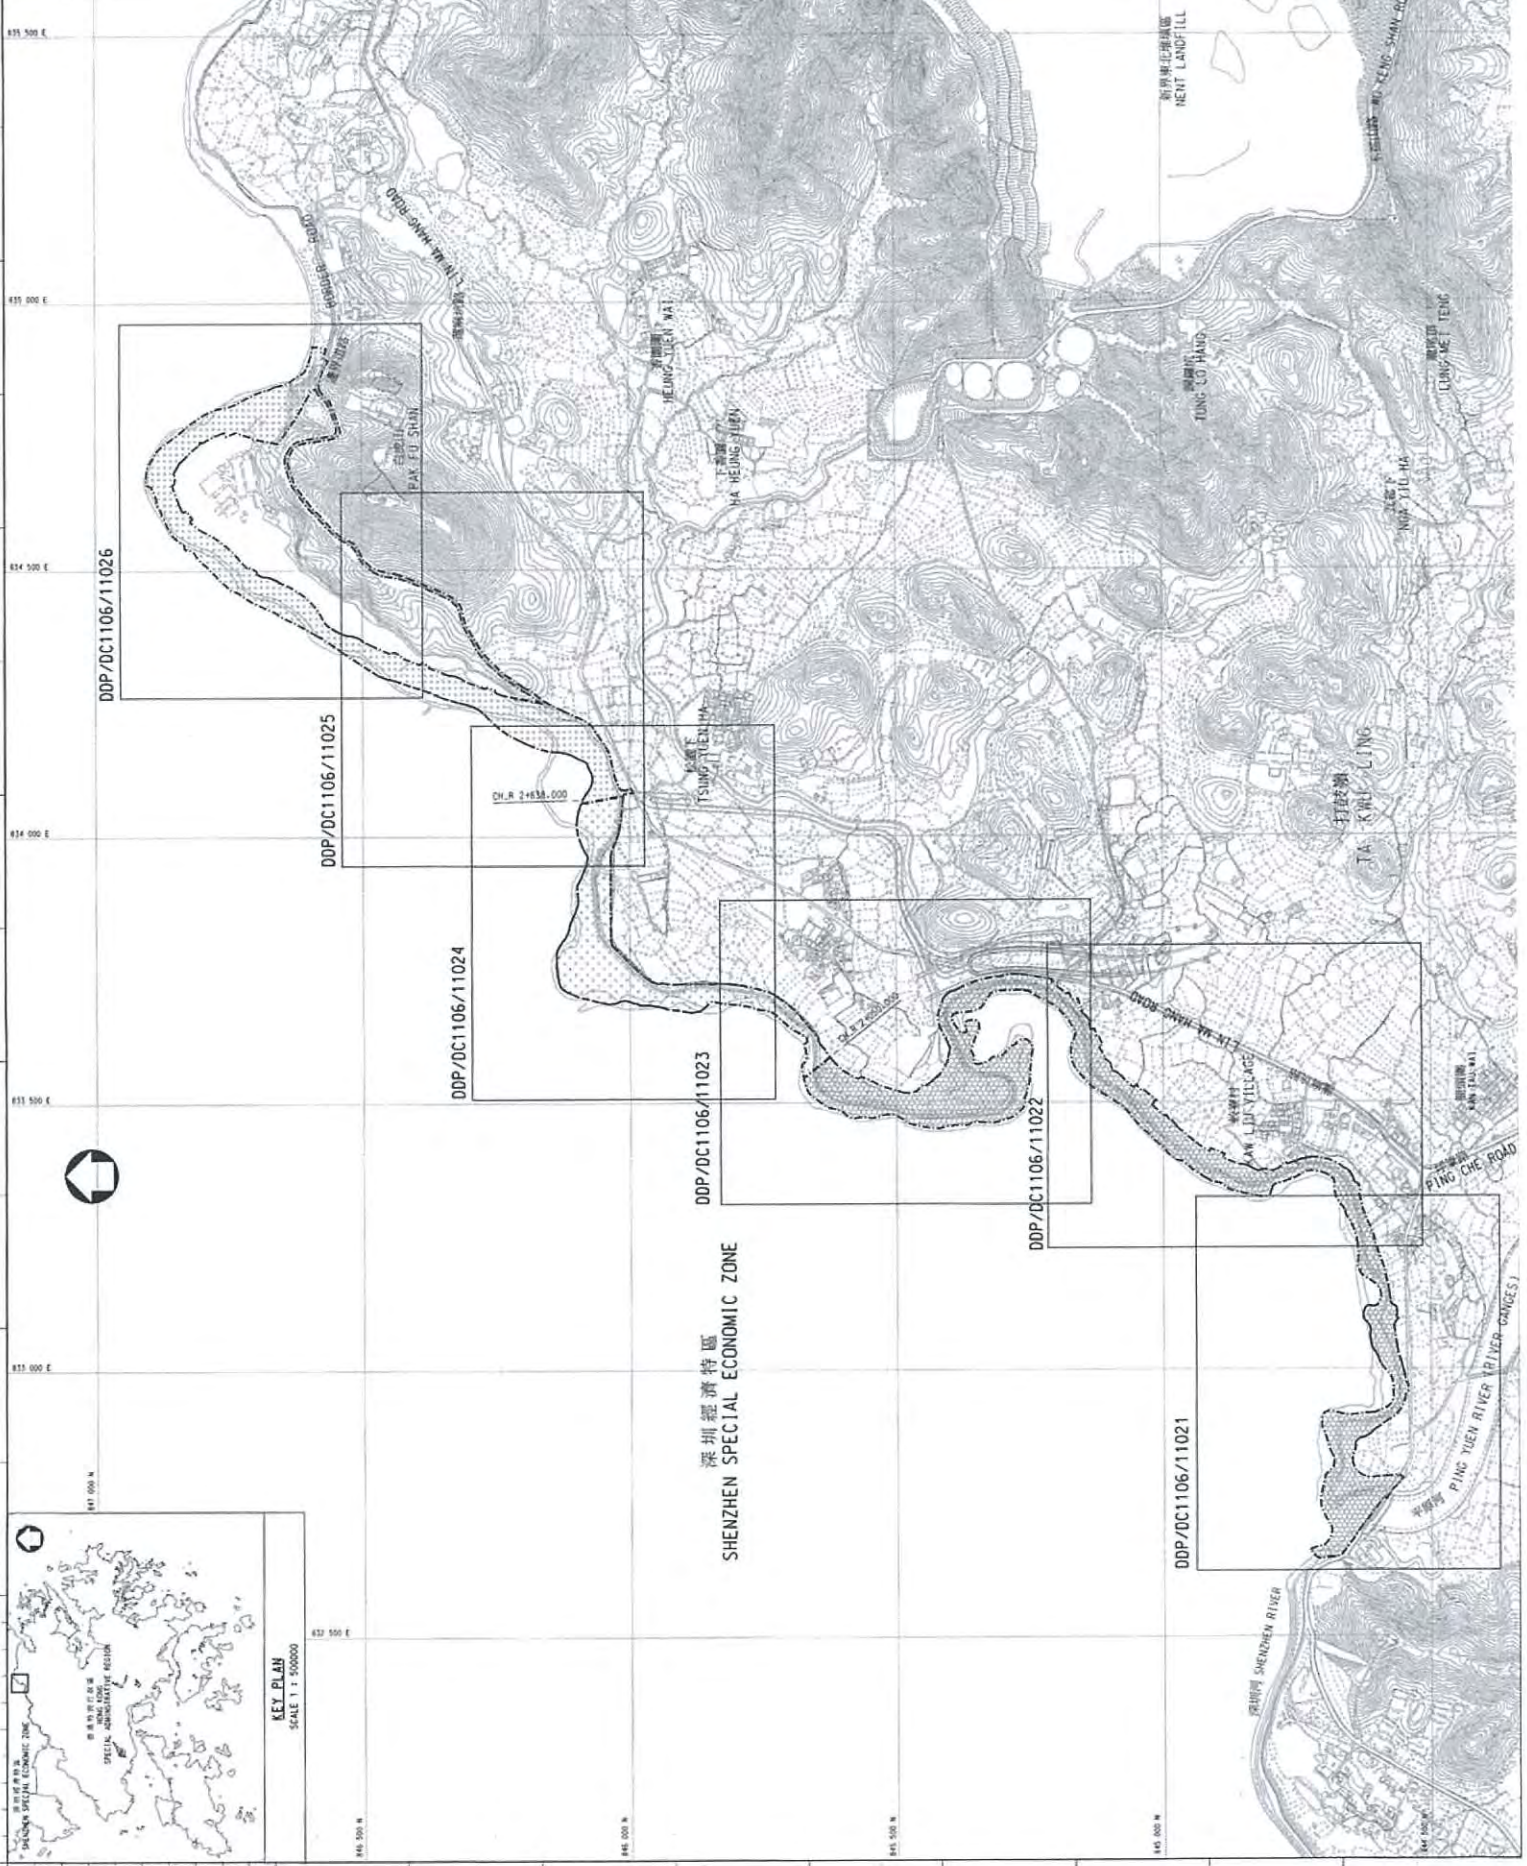

深圳經濟特區  
 SHENZHEN SPECIAL ECONOMIC ZONE

DDP/DC1106/11021

DDP/DC1106/11025

DDP/DC1106/11026

DDP/DC1106/11024

DDP/DC1106/11023

DDP/DC1106/11022

**NOTES:**

- GRID LINES ARE USING KING GRID 1980.
- ALL LEVELS ARE IN METRES AND REFERRED TO M.S.P.O.
- FOR GETTING OUT DETAILS OF SITE LIMITS, REFER TO DRAWING NO. DDP/DC1106/11011 TO DDP/DC1106/11012.
- FOR DETAILS OF AREAS A1, B1, B3 & B4 REFER TO DRAWING NO. DDP/DC106/11012.

**LEGEND:**

- LIMIT OF THE SITE
- PROTION A
- PROTION B
- AREA B1
- AREA B2
- AREA B3
- AREA B4
- PROTION C

DATE 14/05/2008 CHAIRMAN FOR BORDER ROAD

NO.	DATE	DESCRIPTION	INITIAL
DESIGNED	18 NOV 2011	K. K. LI	
DRAWN	18 NOV 2011	K. K. LI	
CHECKED	18 NOV 2011	K. H. POH	
VERIFIED	18 NOV 2011	T. C. LAU	
APPROVED			

Ag Chief Engineer  
 Date 18 NOV 2011  
 contract no. DC/2011/06  
 file no. DP/8/501808  
 project no. 501808

REPROVISIONING OF BOUNDARY PATROL ROAD AND ASSOCIATED SECURITY FACILITIES BETWEEN PING YUEN RIVER AND PAK FU SHAN AND DRAINAGE WORKS IN NORTH DISTRICT

drawing title

SCOPE OF WORKS AT PORTION A, B AND C OF THE SITE


scale 1 : 5,000

sheet no. DDP/DC1106/11011

COPYRIGHT RESERVED


DRAINAGE PROJECTS DIVISION

DRAINAGE SERVICES DEPARTMENT  
 GOVERNMENT OF THE HONG KONG SPECIAL ADMINISTRATIVE REGION

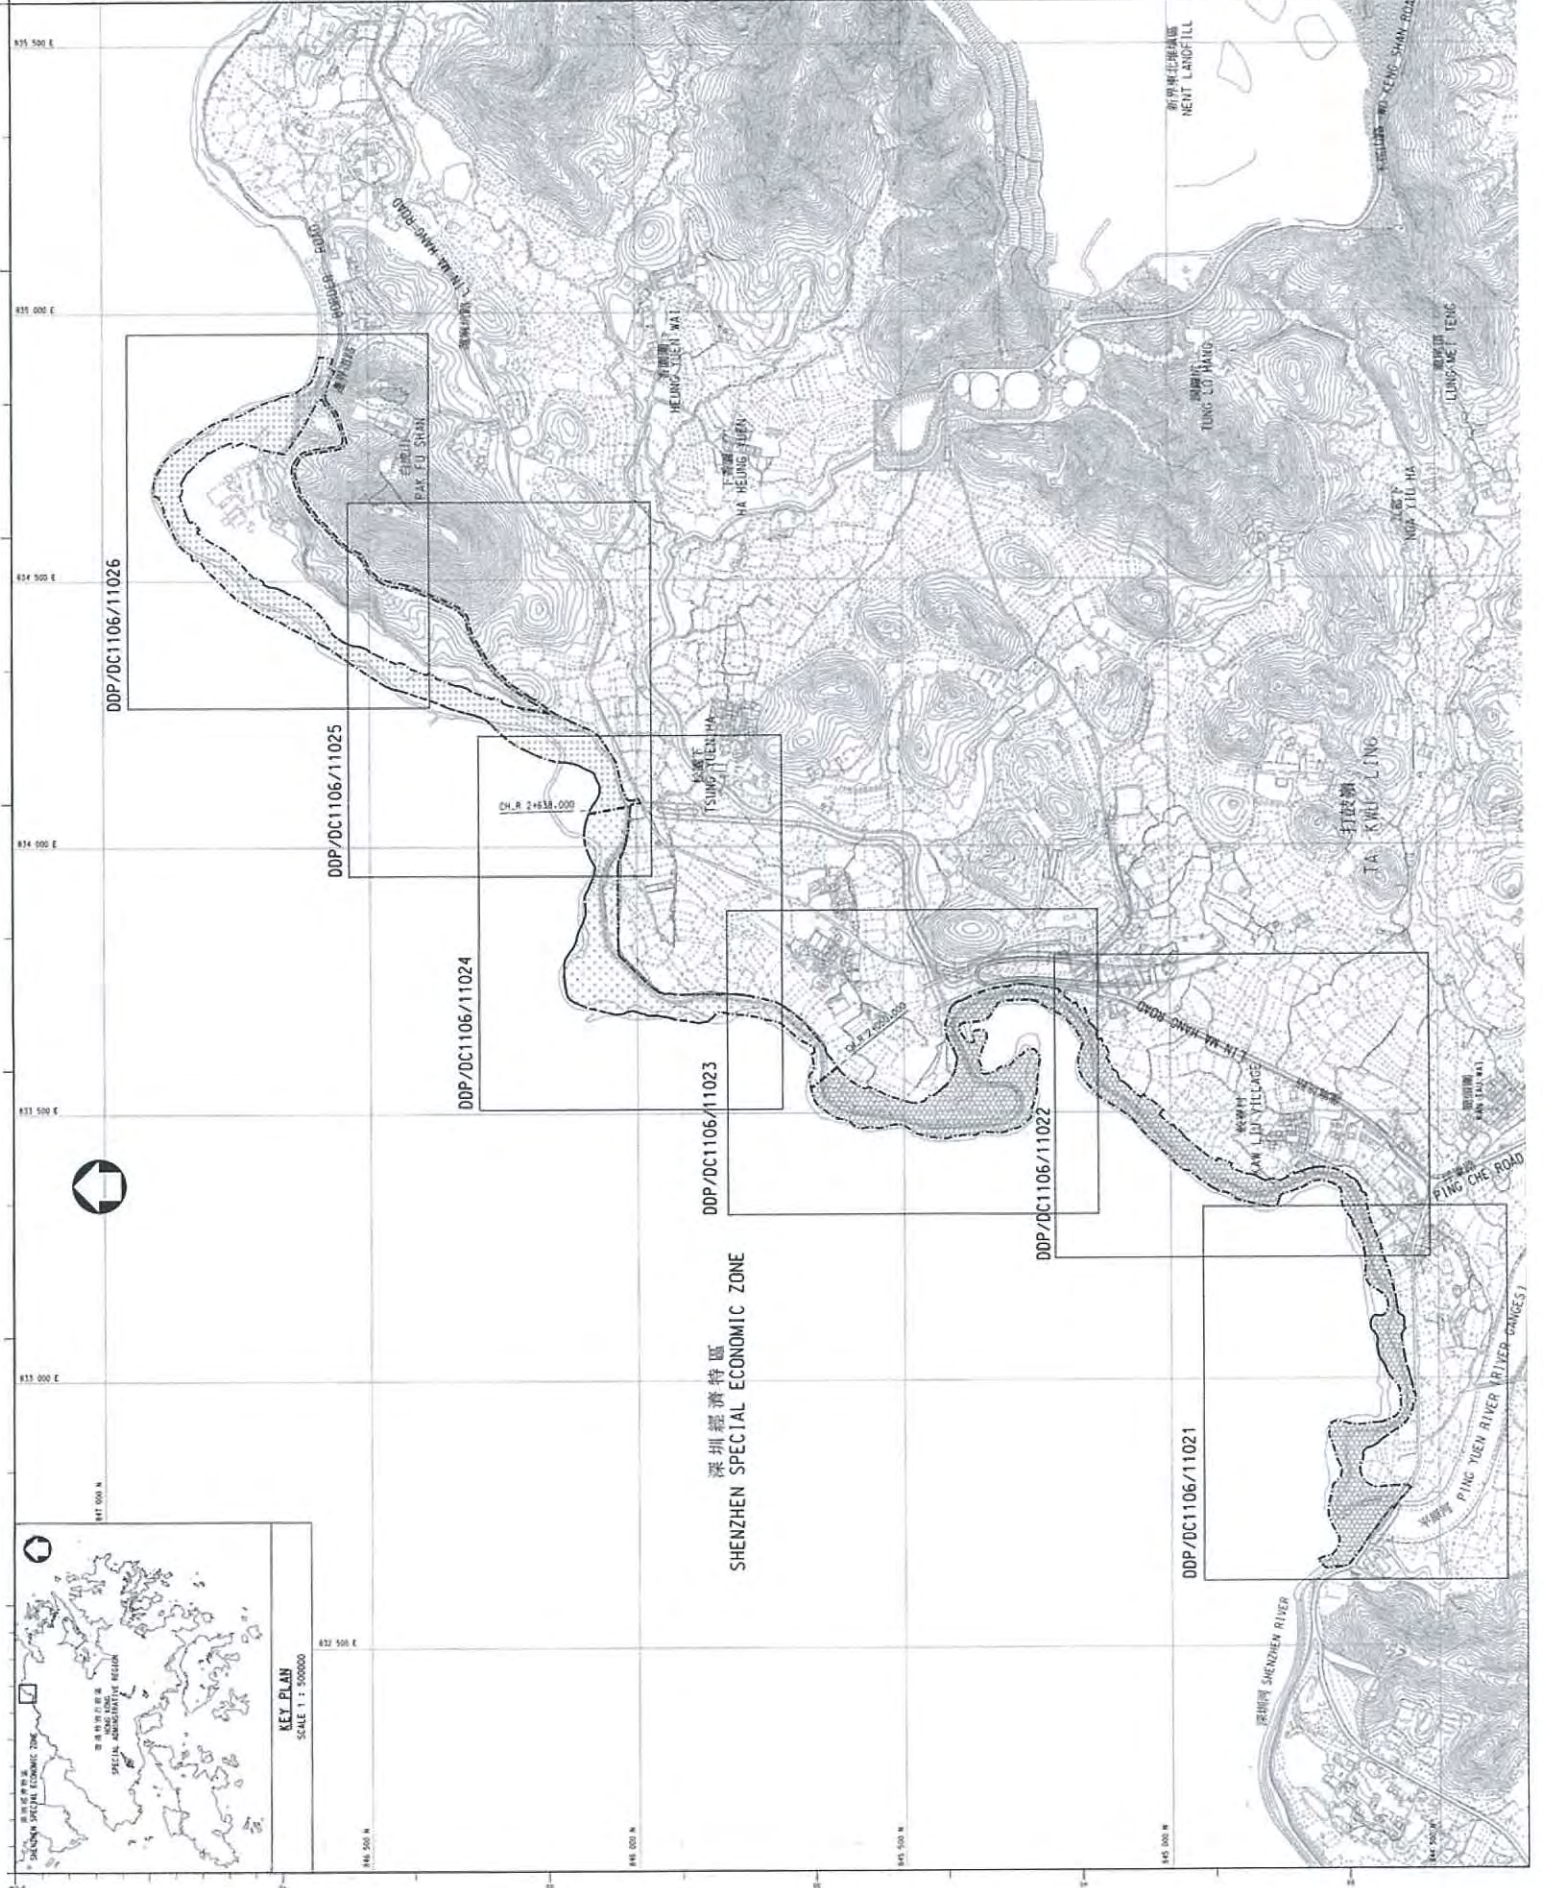


深圳經濟特區  
 SHENZHEN SPECIAL ECONOMIC ZONE

KEY PLAN  
 SCALE 1 : 50000

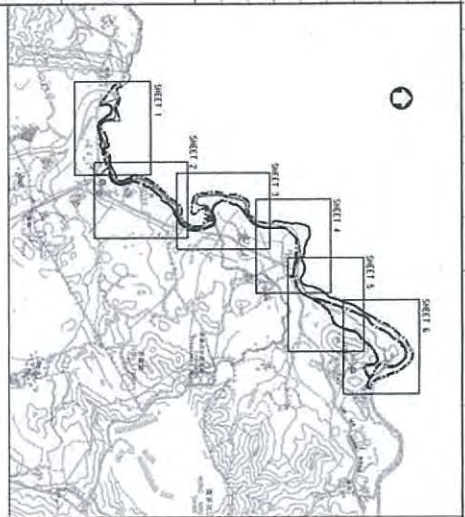

LOCATION PLAN  
SCALE 1:20000

深圳市  
SHENZHEN SHI

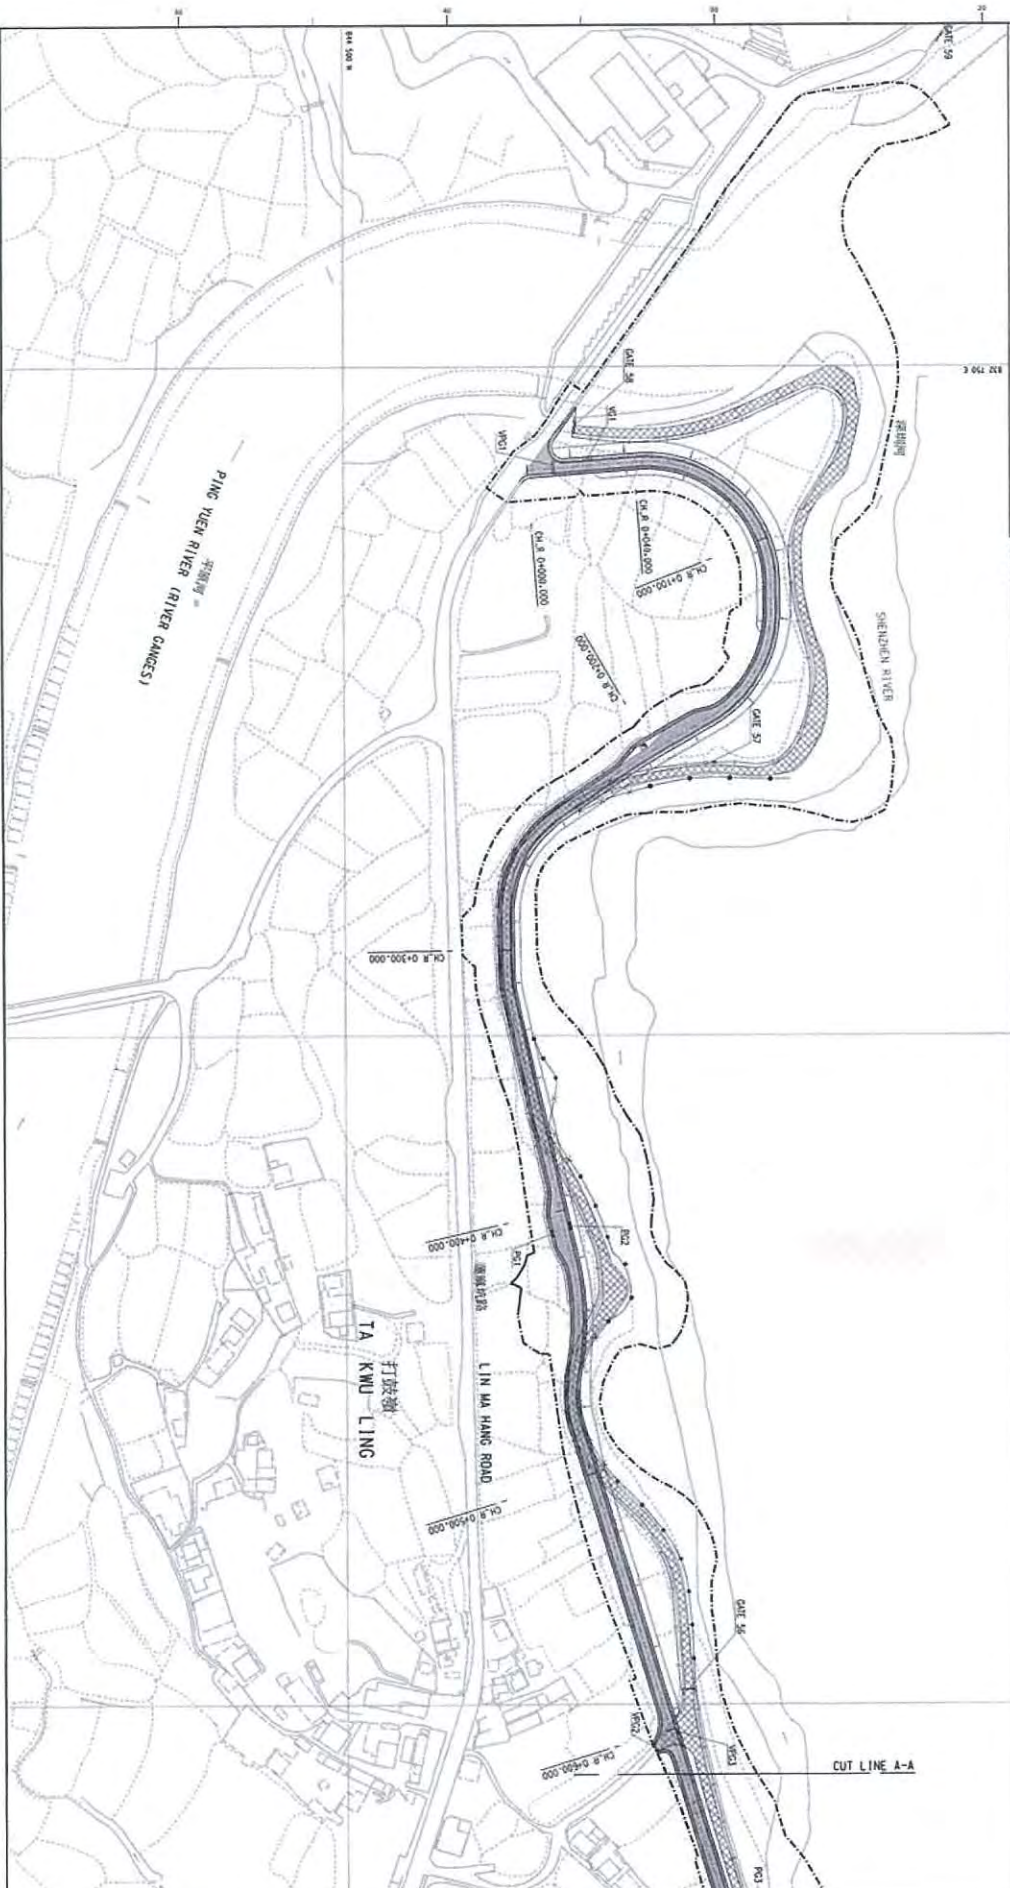

NO.	DATE	DESCRIPTION	INITIAL
1	28 Nov 2011	DESIGNED	C. L. CHAN
2	28 Nov 2011	CHECKED	W. H. NG
3	28 Nov 2011	APPROVED	W. H. NG

drawing title  
GENERAL LAYOUT

drawing no.  
DDP/DC1106/11021

scale  
1:1,000

office  
DRAINAGE SERVICES DEPARTMENT  
GOVERNMENT OF THE  
HONG KONG  
SPECIAL ADMINISTRATIVE REGION

contract  
501808

contract no.  
DC/2011/06

file no.  
DP/8/501808

project no.  
501808

reprovisioning of boundary patrol road and associated security facilities between ping yuen river and pak fu shan and drainage works in north district

copy right reserved

DRAINAGE SERVICES DEPARTMENT  
GOVERNMENT OF THE  
HONG KONG  
SPECIAL ADMINISTRATIVE REGION

DRAINAGE PROJECTS DIVISION

DDP/DC1106/11021

1:1,000


DDP/DC1106/11021

1:1,000

DDP/DC1106/11021

1:1,000

- NOTES:
1. CHAIN LINES ARE HONG KONG GRID 1980.
  2. ALL LENGTHS ARE IN METRES AND REFERRED TO N.T.P.D.
- LEGEND:
- (L) of the site
  - EXISTING BOUNDARY PATROL ROAD
  - EXISTING BOUNDARY PATROL ROAD TO BE RECONSTRUCTED
  - PROPOSED BOUNDARY PATROL ROAD
  - PROPOSED NEW MESH PRIMARY BOUNDARY FENCE
  - PROPOSED NEW MESH SECONDARY BOUNDARY FENCE
  - EXISTING BOUNDARY FENCE AND ASSOCIATED GATE POST AND PILLAR BOX
  - EXISTING BOUNDARY FENCE AND ASSOCIATED GATE POST AND PILLAR BOX TO BE DEMOLISHED
  - PROPOSED VERTICAL AND RETENTION GATE (V&R)
  - PROPOSED RETENTION GATE (R&V)
  - EXISTING GATE
  - EXISTING GATE TO BE DEMOLISHED
  - PILLAR BOX
  - SWITCH ROOM
  - PROPOSED VERTICAL AND RETENTION GATE (V&R)
  - PROPOSED RETENTION GATE (R&V)
  - EXISTING GATE
  - EXISTING GATE TO BE DEMOLISHED
  - PILLAR BOX
  - SWITCH ROOM
  - PROPOSED CUT SLOPE
  - PROPOSED CHAIN LINK FENCE
  - EXISTING CHAIN LINK FENCE TO BE DEMOLISHED
  - EXISTING CHAIN LINK FENCE TO BE RECONSTRUCTED
  - PROPOSED FILL SLOPE
  - CHAINED FOR BOUNDARY ROAD
  - PROPOSED VERTICAL AND RETENTION GATE (V&R)
  - PROPOSED RETENTION GATE (R&V)
  - EXISTING GATE
  - EXISTING GATE TO BE DEMOLISHED
  - PILLAR BOX
  - SWITCH ROOM

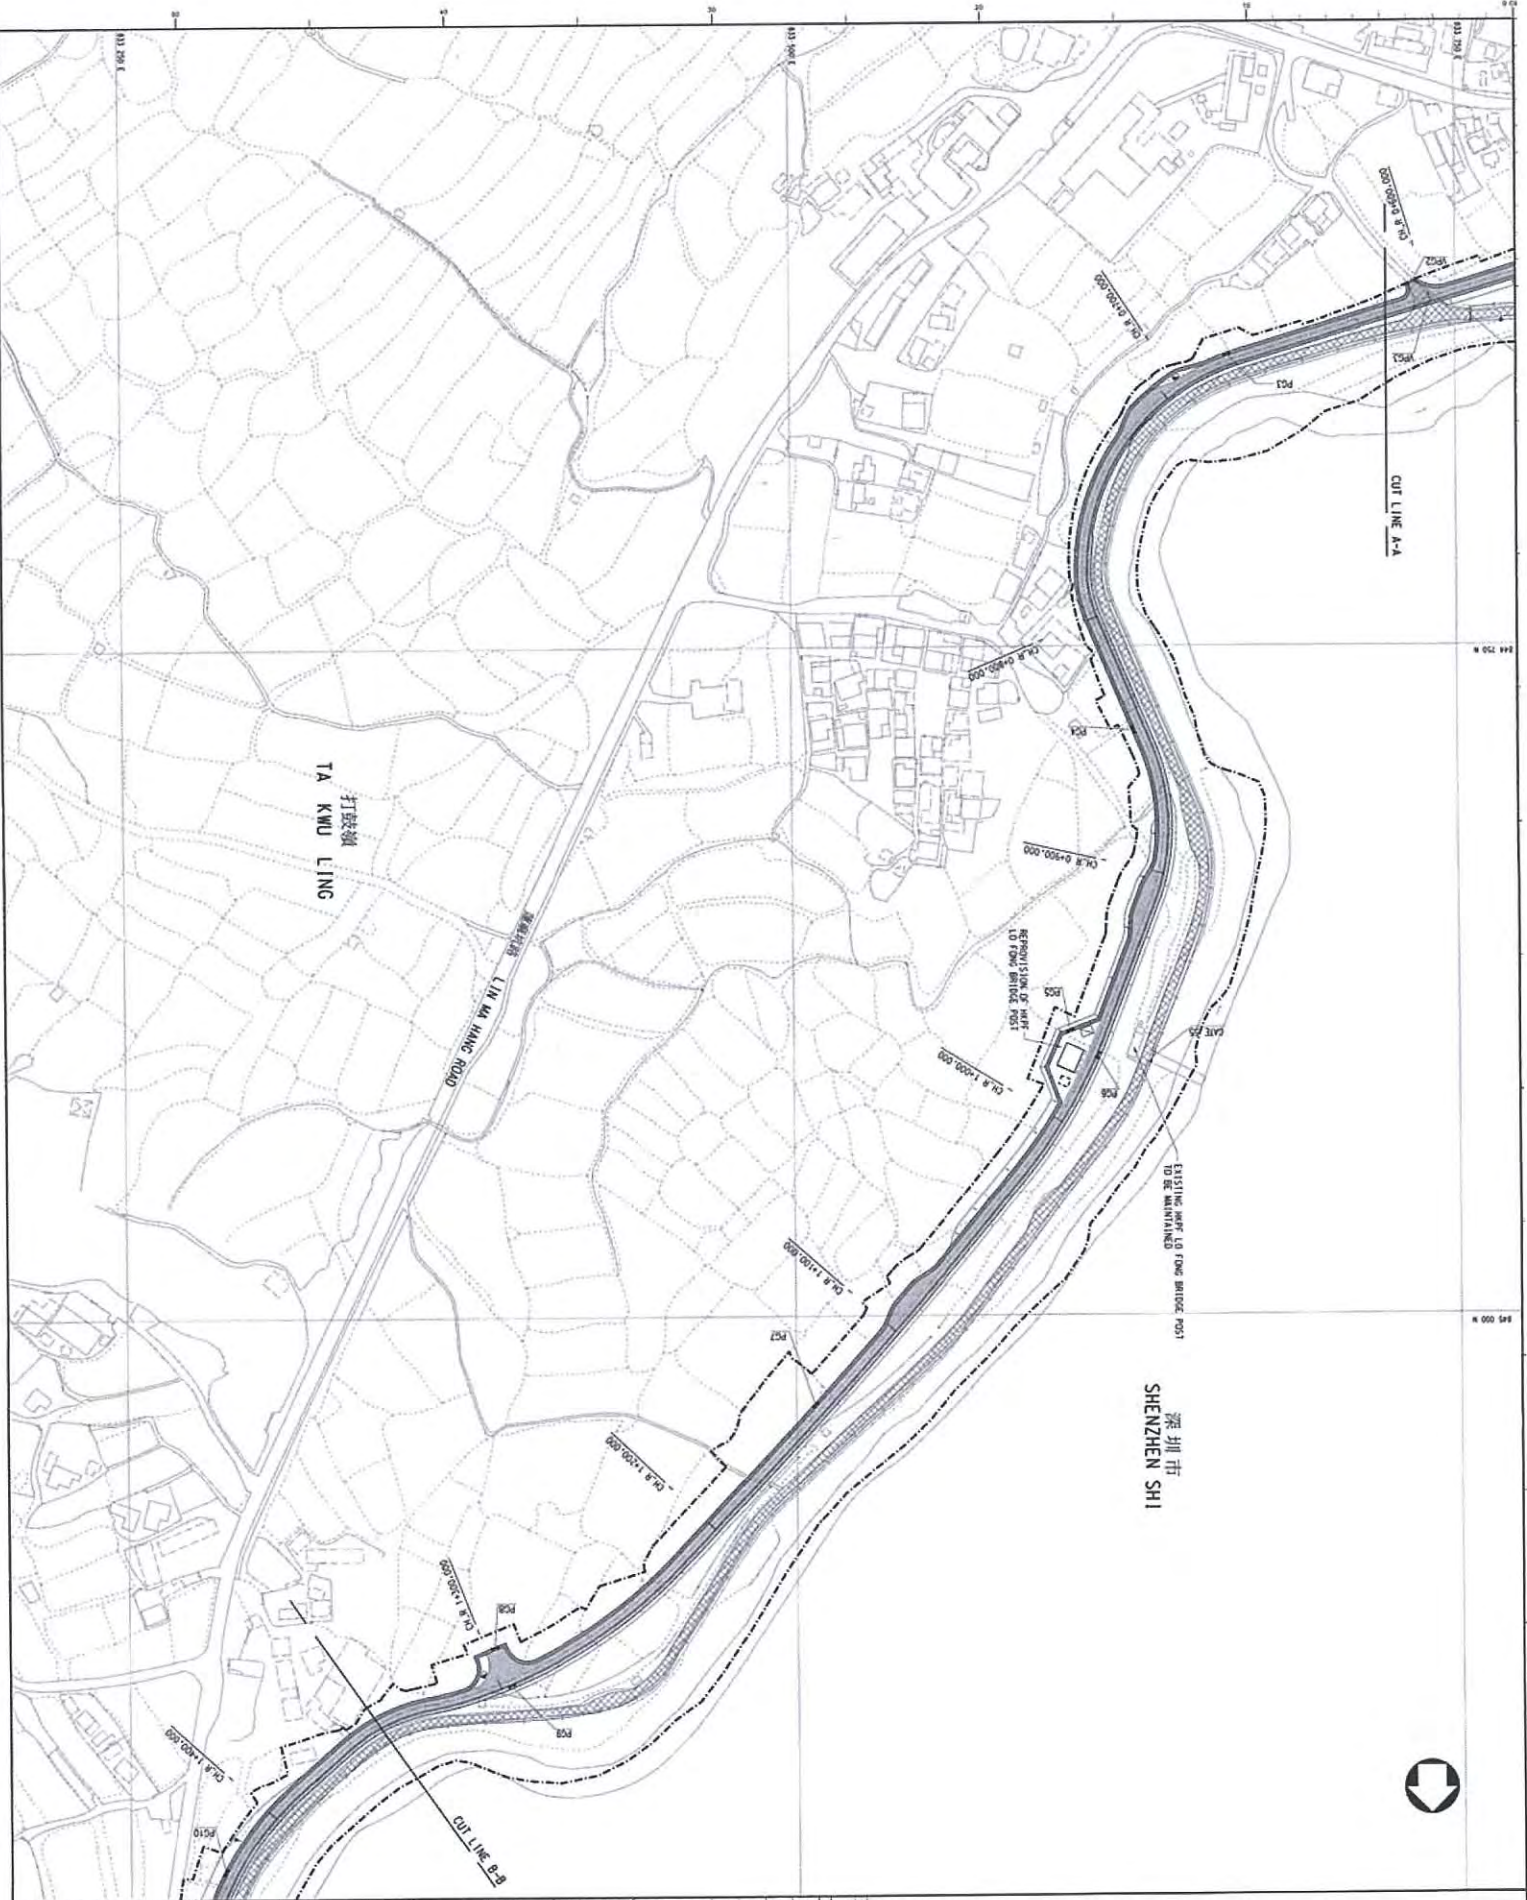

NOTES:  
 1. FOR GENERAL NOTES & LEGEND, REFER TO DRG. NO. DS/2011/001.

NO.	DATE	DESCRIPTION	INITIALS
1	28 NOV 2011	DESIGN	
2	28 NOV 2011	DESIGN	
3	28 NOV 2011	DESIGN	
4	28 NOV 2011	DESIGN	
5	28 NOV 2011	DESIGN	

Ag. Chief Engineer  
 S. L. LING  
 28 NOV 2011  
 DS/2011/001

contract no. DC/2011/05  
 file no. DP/8/5018C8  
 project no. 5018C8

REPROVISIONING OF BOUNDARY PARAPET ROAD AND ASSOCIATED SECURITY FACILITIES BETWEEN PING TIEN RIVER AND PAK TSI DISTRICT IN NORTH DISTRICT


drawing title  
**GENERAL LAYOUT**

(SHEET 2 OF 5)  
 drawing no. **DDP/DC1106/11022** scale 1:1,000

COPYRIGHT RESERVED

**DRAINAGE PROJECTS DIVISION**

DRAINAGE SERVICES DEPARTMENT  
 GOVERNMENT OF THE HONG KONG SPECIAL ADMINISTRATIVE REGION

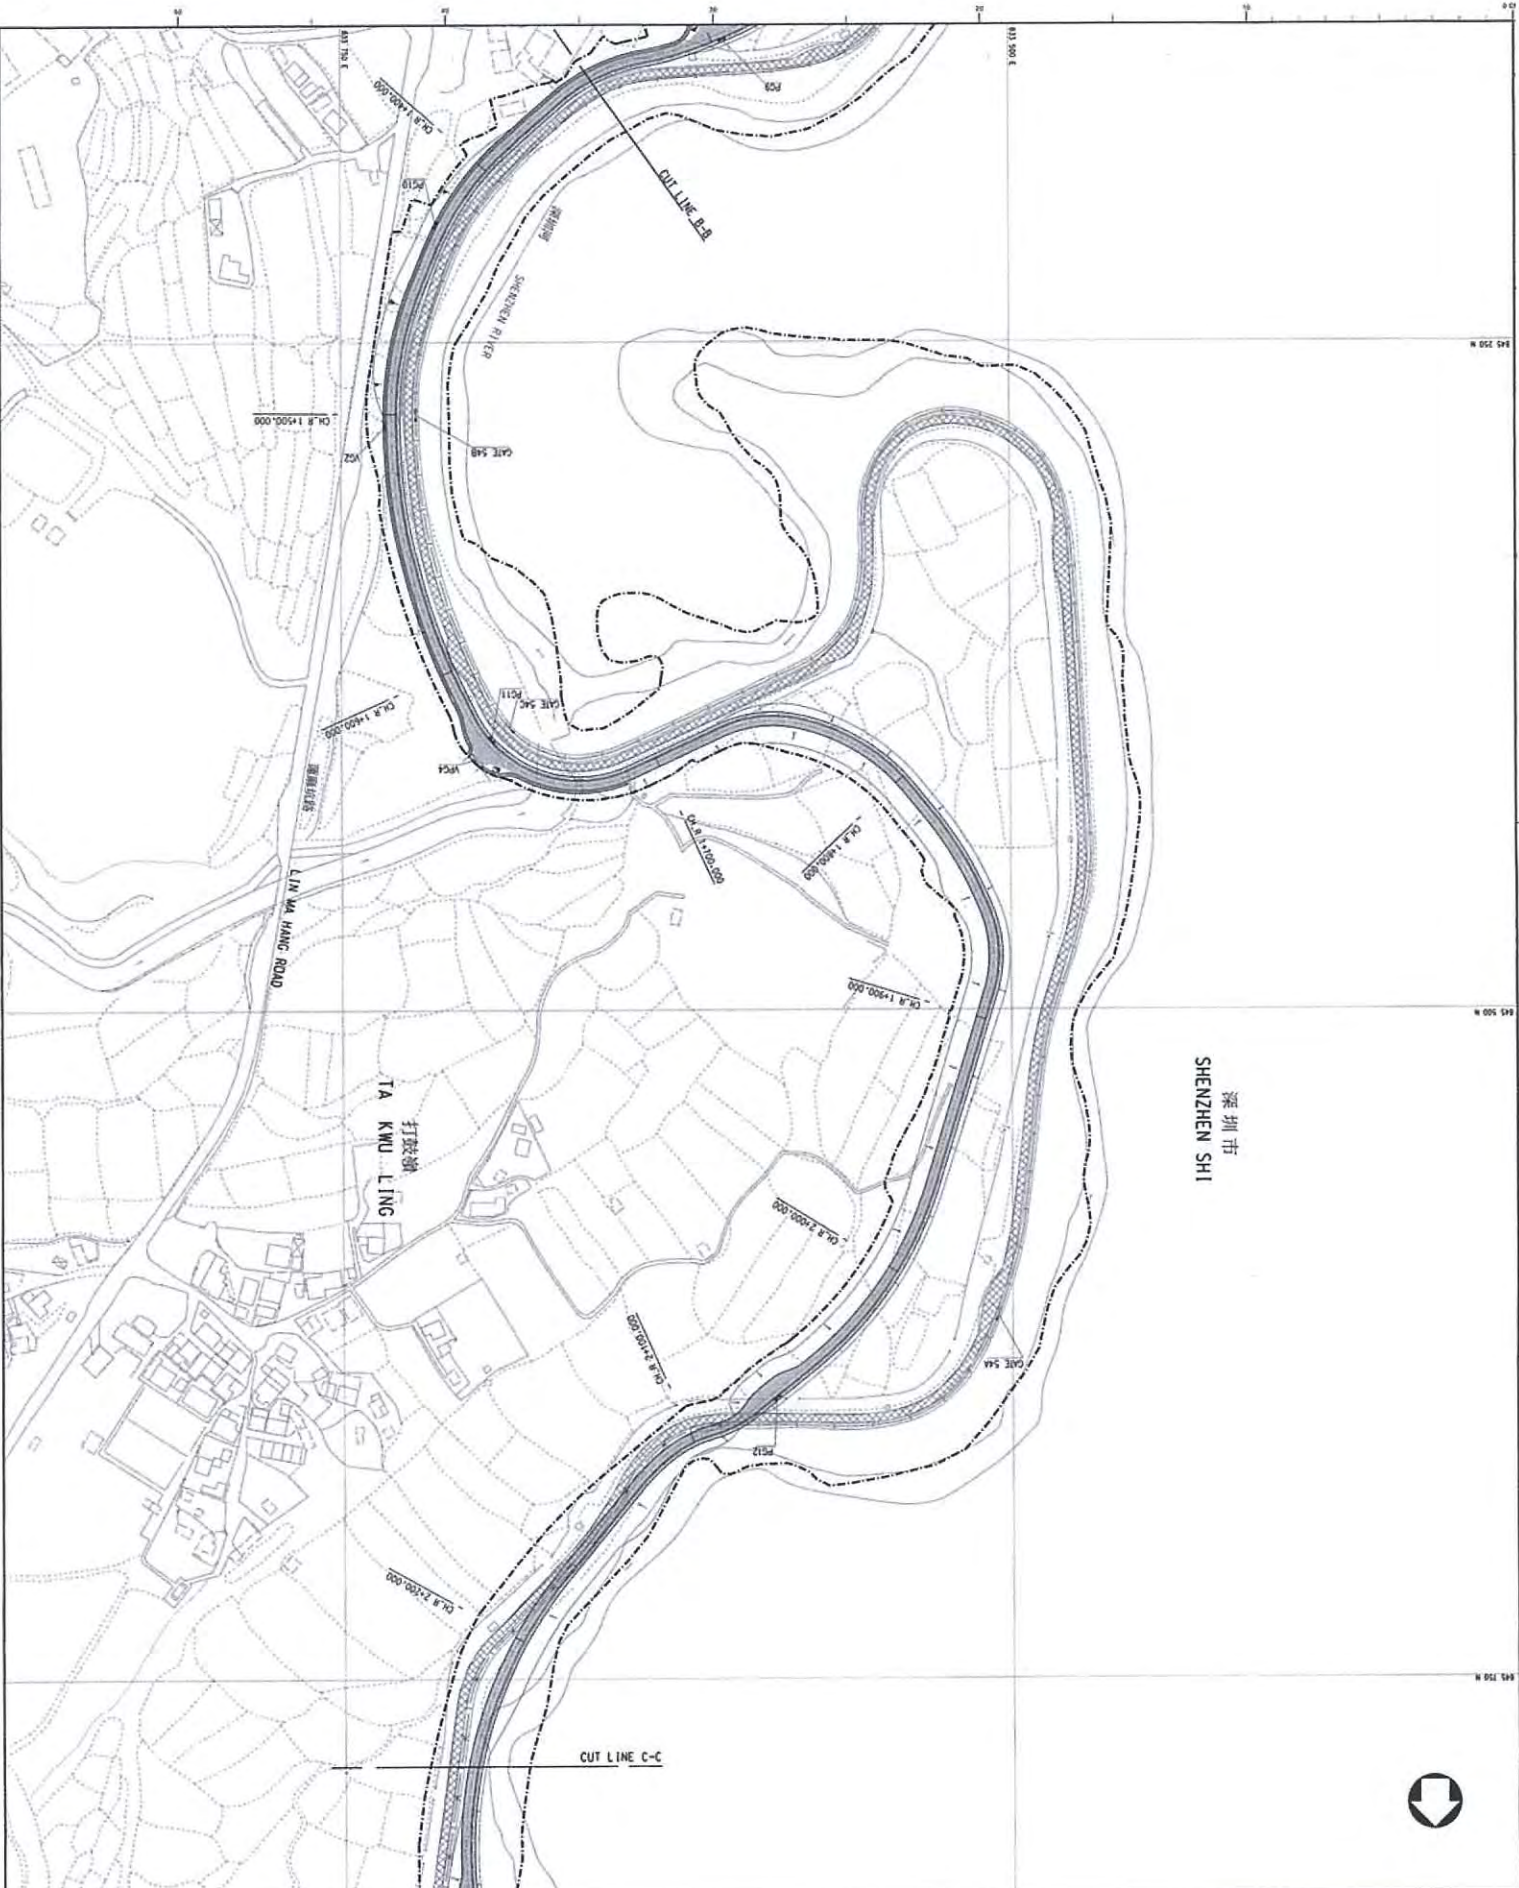

NOTES:  
 1. FOR GENERAL NOTES & LEGEND, REFER TO Dwg. No. DP/DC1106/11023.

NO.	DATE	DESCRIPTION	INITIAL
1			

REVISION	DATE	DESCRIPTION
1	28 NOV 2011	DESIGN
2	28 NOV 2011	DESIGN
3	28 NOV 2011	DESIGN
4	28 NOV 2011	DESIGN
5	28 NOV 2011	DESIGN

designed by: *[Signature]* 28 NOV 2011  
 drawn by: *[Signature]* 28 NOV 2011  
 checked by: *[Signature]* 28 NOV 2011  
 verified by: *[Signature]* 28 NOV 2011  
 approved by: *[Signature]* 28 NOV 2011  
 Asst. Chief Engineer  
 DATE

contract no. DC/2011/05  
 file no. DP/8/501808  
 project no. 501808  
 contract

REPRODUCTION OF BOUNDARY PATROL ROAD AND ASSOCIATED SECURITY FACILITIES BETWEEN PING TIEN RIVER AND PAK FU SHAN AND DRAINAGE WORKS IN NORTH DISTRICT

drawing title: GENERAL LAYOUT

SHEET 3 OF 61

drawing no. DDP/DC1106/11023


scale 1:1000

COPYRIGHT RESERVED

office: DRAINAGE SERVICES DEPARTMENT  
 GOVERNMENT OF THE HONG KONG SPECIAL ADMINISTRATIVE REGION



深圳市  
SHENZHEN SHI

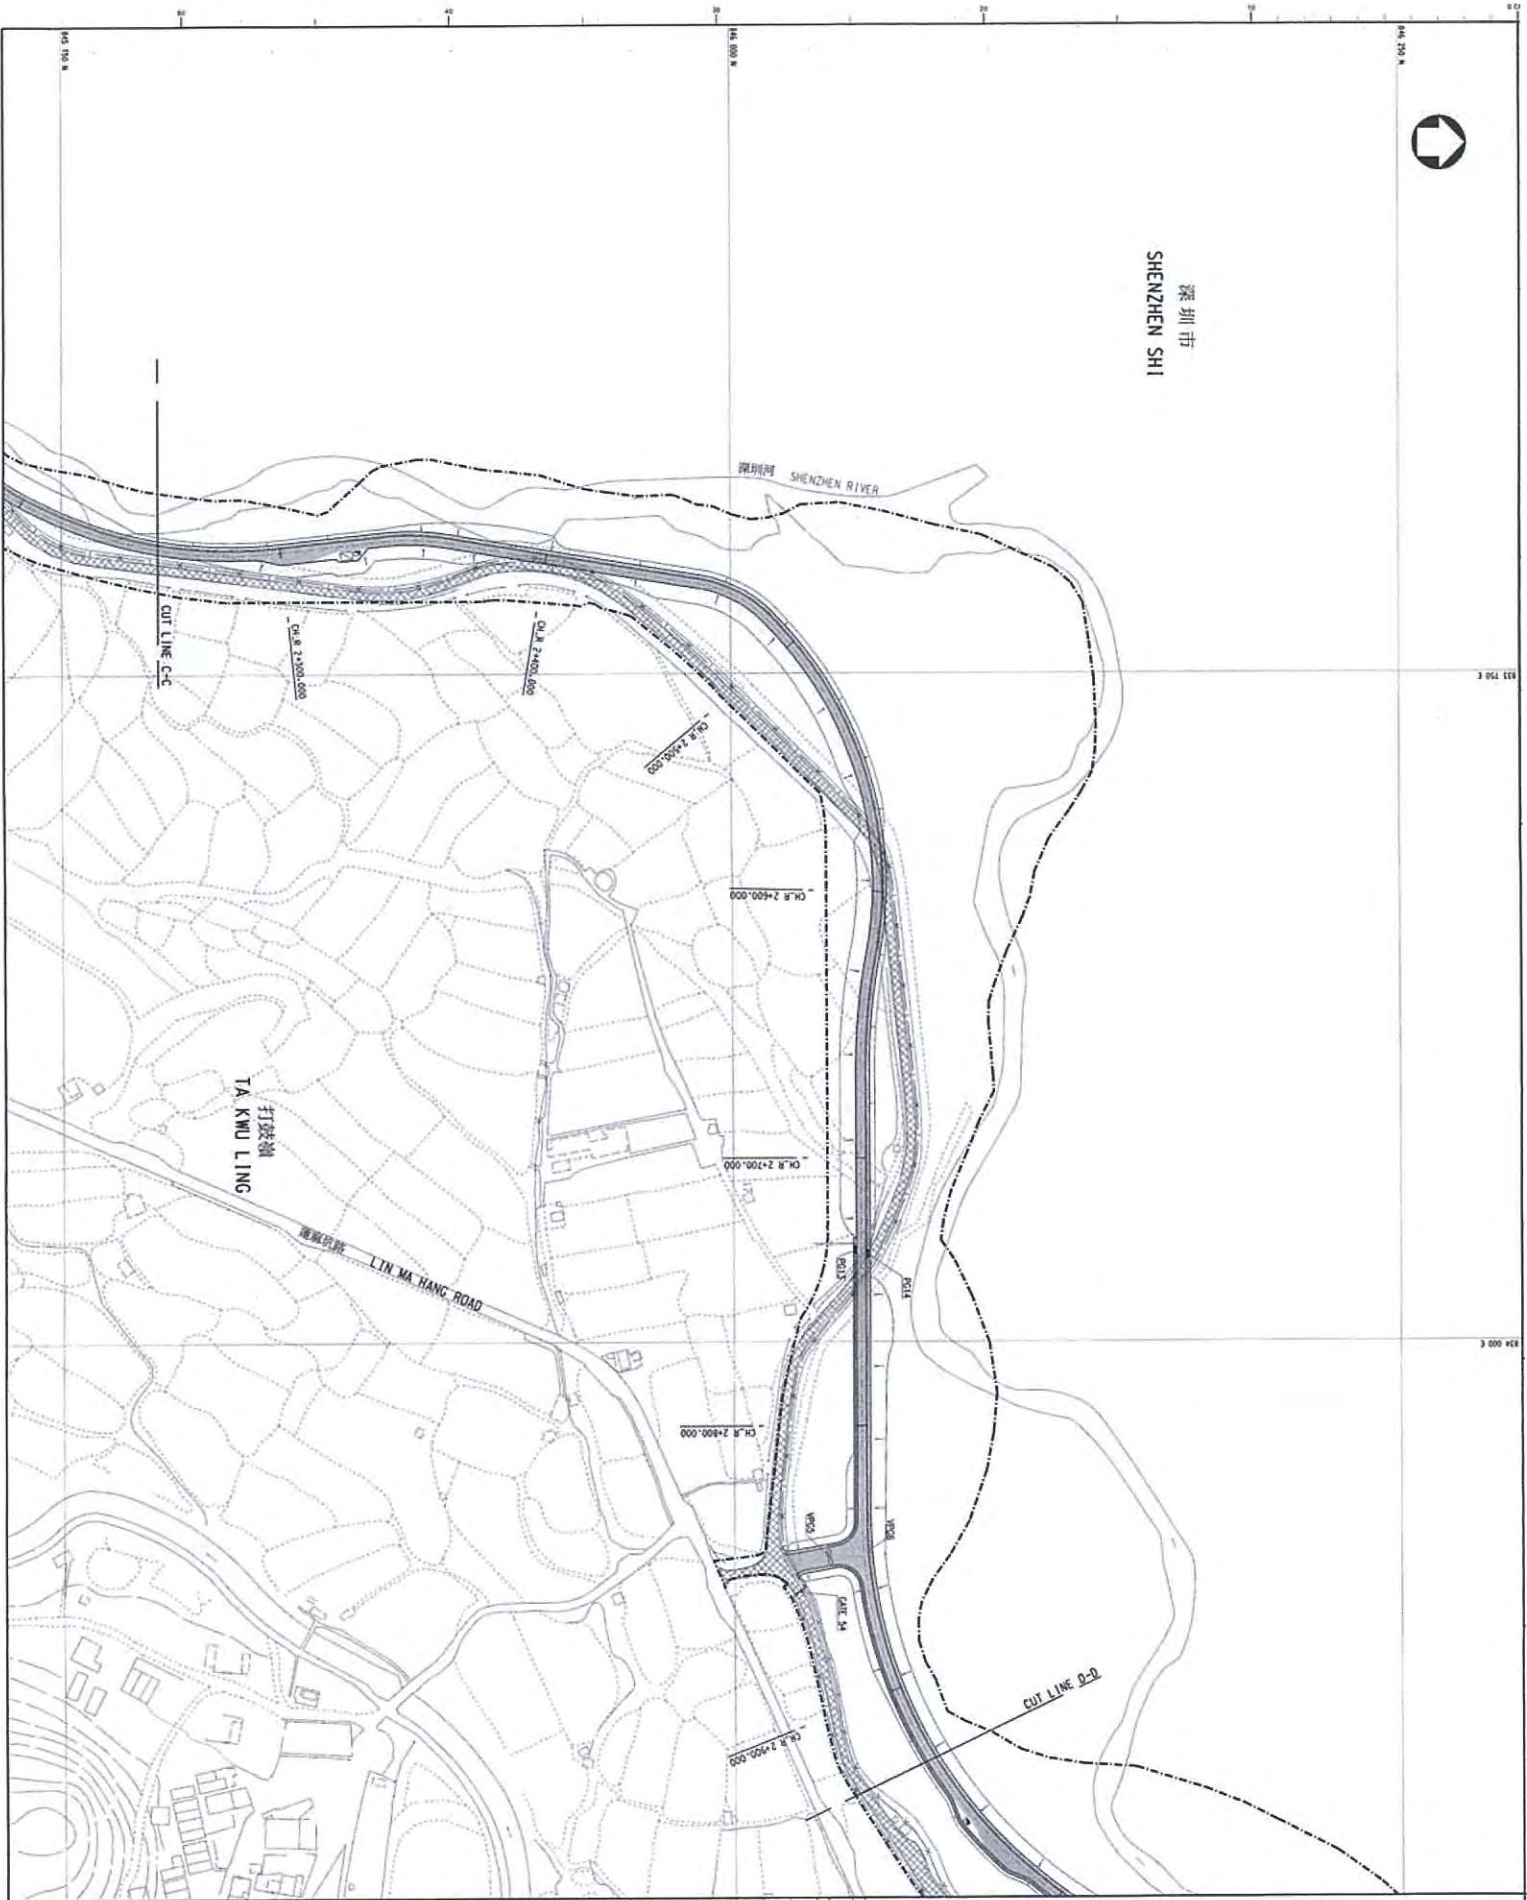

NOTES:  
1. FOR GENERAL NOTES & LEGEND, REFER TO  
DWG. NO. DP/DC1106/11024.

NO.	DATE	DESCRIPTION	INITIALS
1			
2			
3			
4			
5			
6			
7			
8			
9			
10			

APPROVED: *[Signature]*  
L. C. LAM  
28 NOV 2011


CONTRACT NO. DP/8/501808  
PROJECT NO. 501808


REPROVISIONING OF BOUNDARY PATROL ROAD AND ASSOCIATED SECURITY FACILITIES BETWEEN PING YUEN RIVER AND PAK FU SHAN AND DRAINAGE WORKS IN NORTH DISTRICT

DRAWING TITLE  
GENERAL LAYOUT

SHEET 4 OF 5  
DRAWING NO. DDP/DC1106/11024  
SCALE 1:1,000

COPYRIGHT RESERVED  
DRAINAGE SERVICES DEPARTMENT  
GOVERNMENT OF THE  
SPECIAL ADMINISTRATIVE REGION



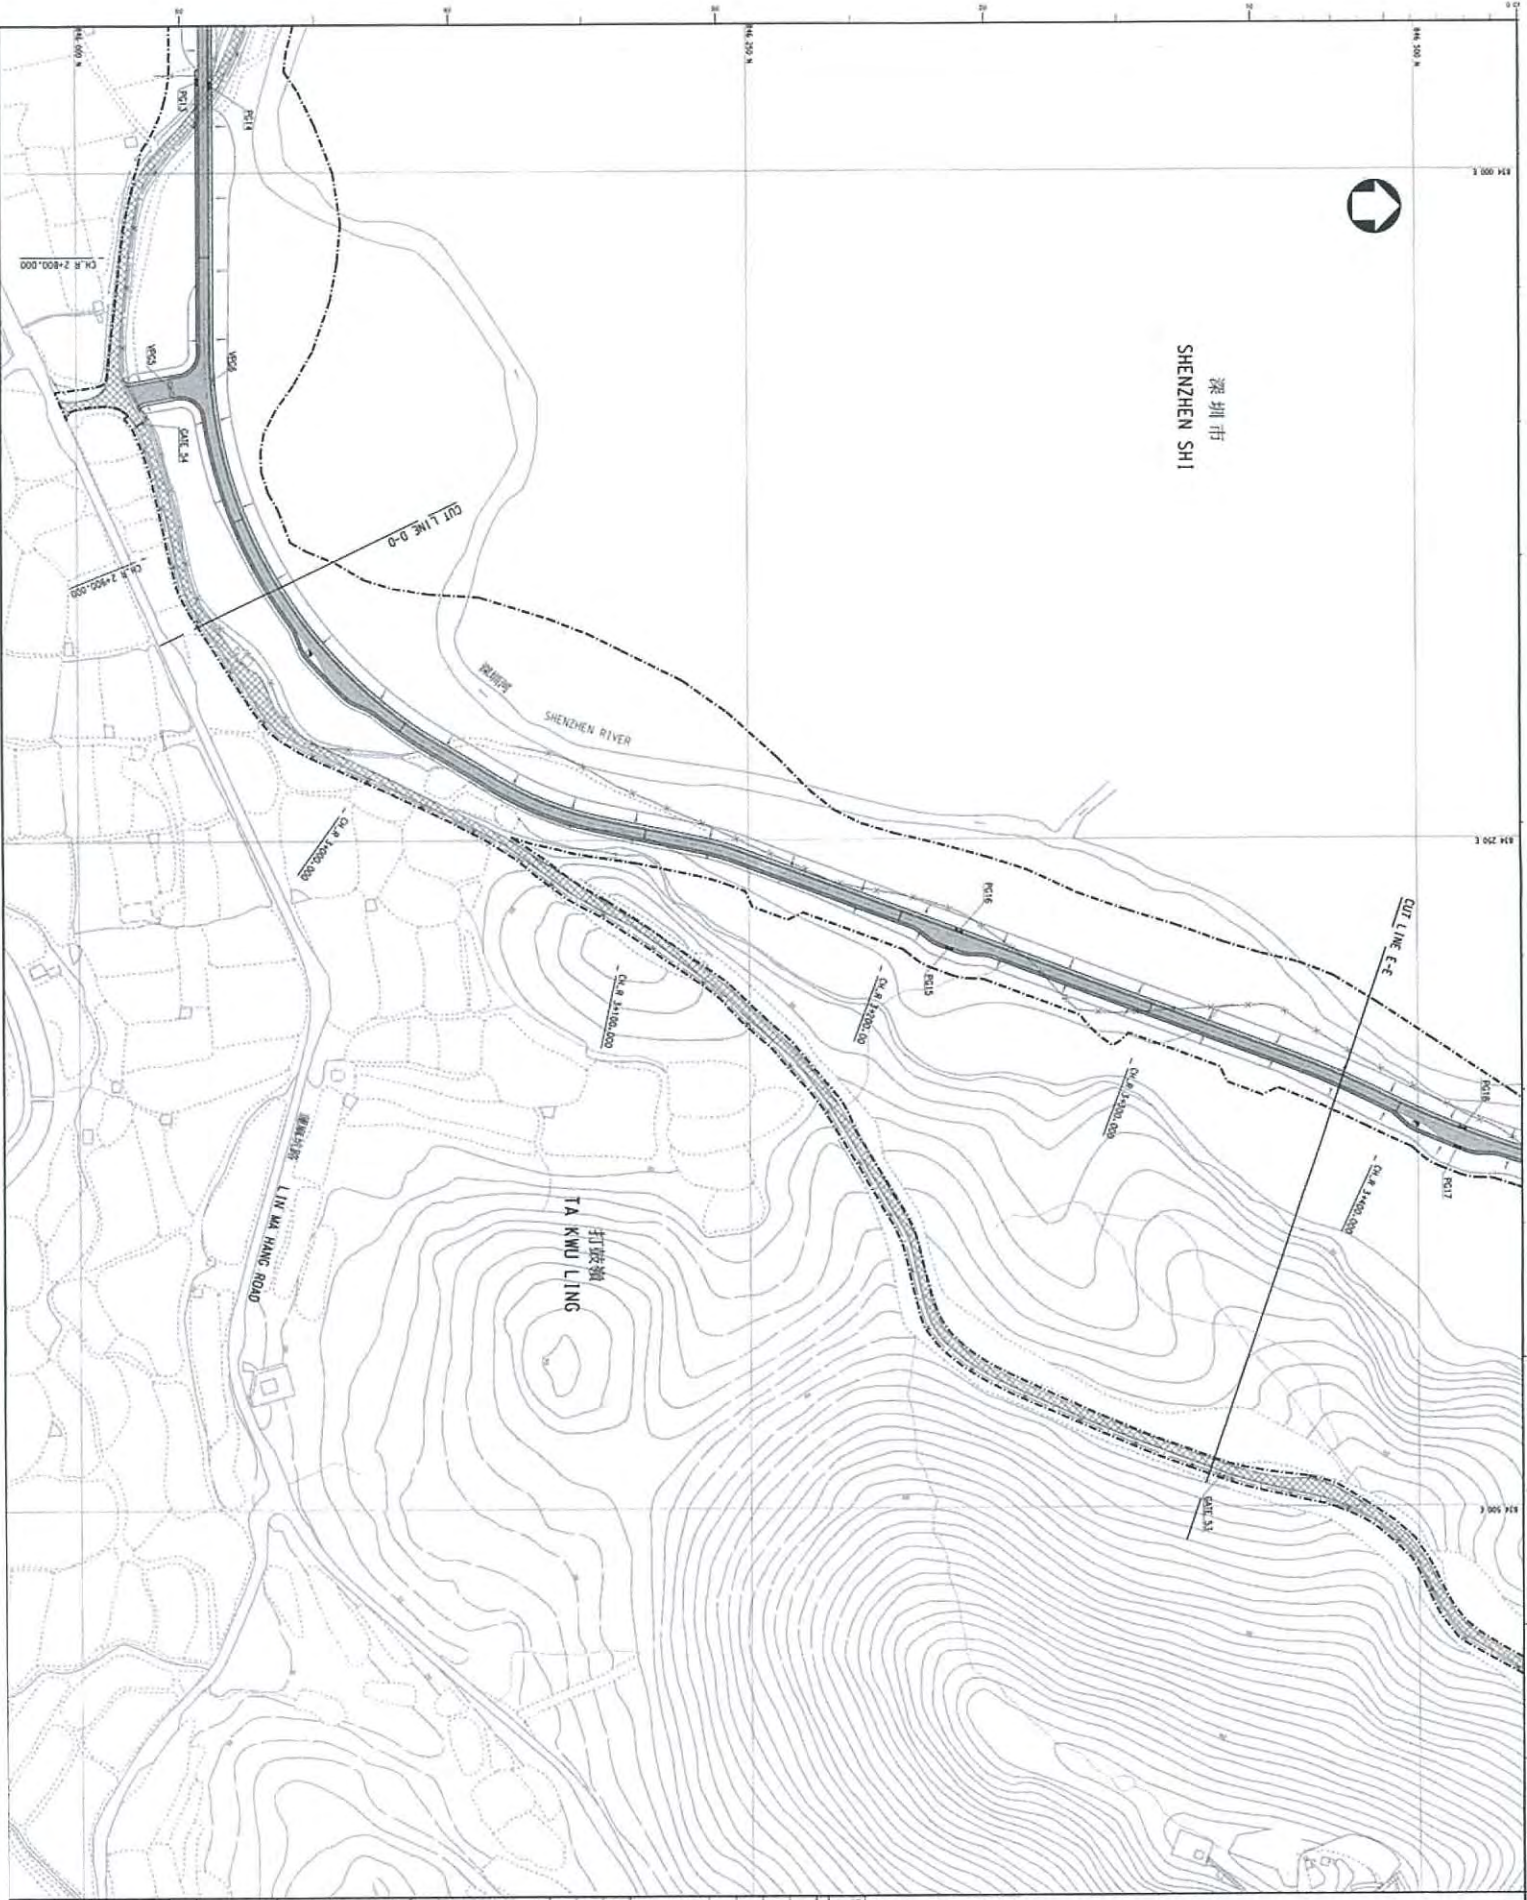

NOTES:  
1. FOR GENERAL NOTES & LEGEND, REFER TO  
DPP, NO. DP/DC/1106/1102/1.

NO.	DATE	DESCRIPTION	INITIALS
1	28 NOV 2011	DESIGNED	C. F. CHAN
2	28 NOV 2011	DRAWN	L. M. LEE
3	28 NOV 2011	CHECKED	M. W. NG
4	28 NOV 2011	VALIDATED	L. C. LAM
5	28 NOV 2011	APPROVED	[Signature]

Ag. Chief Engineer  
Date

contract no. DC/2011/05

file no. DP/8/501808

project no. 501808

contract

REPROVISIONING OF BOUNDARY PATROL ROAD AND ASSOCIATED SECURITY FACILITIES BETWEEN PING YEH RIVER AND PAK FU SHAN AND DRAINAGE WORKS IN NORTH DISTRICT

drawing title  
**GENERAL LAYOUT**

sheet 5 of 5

drawing no. DDP/DC/1106/11025

scale 1:1,000


COPYRIGHT RESERVED

**DRAINAGE PROJECTS DIVISION**

DRAINAGE SERVICES DEPARTMENT  
GOVERNMENT OF THE  
SPECIAL ADMINISTRATIVE REGION



深圳市  
SHENZHEN SHI

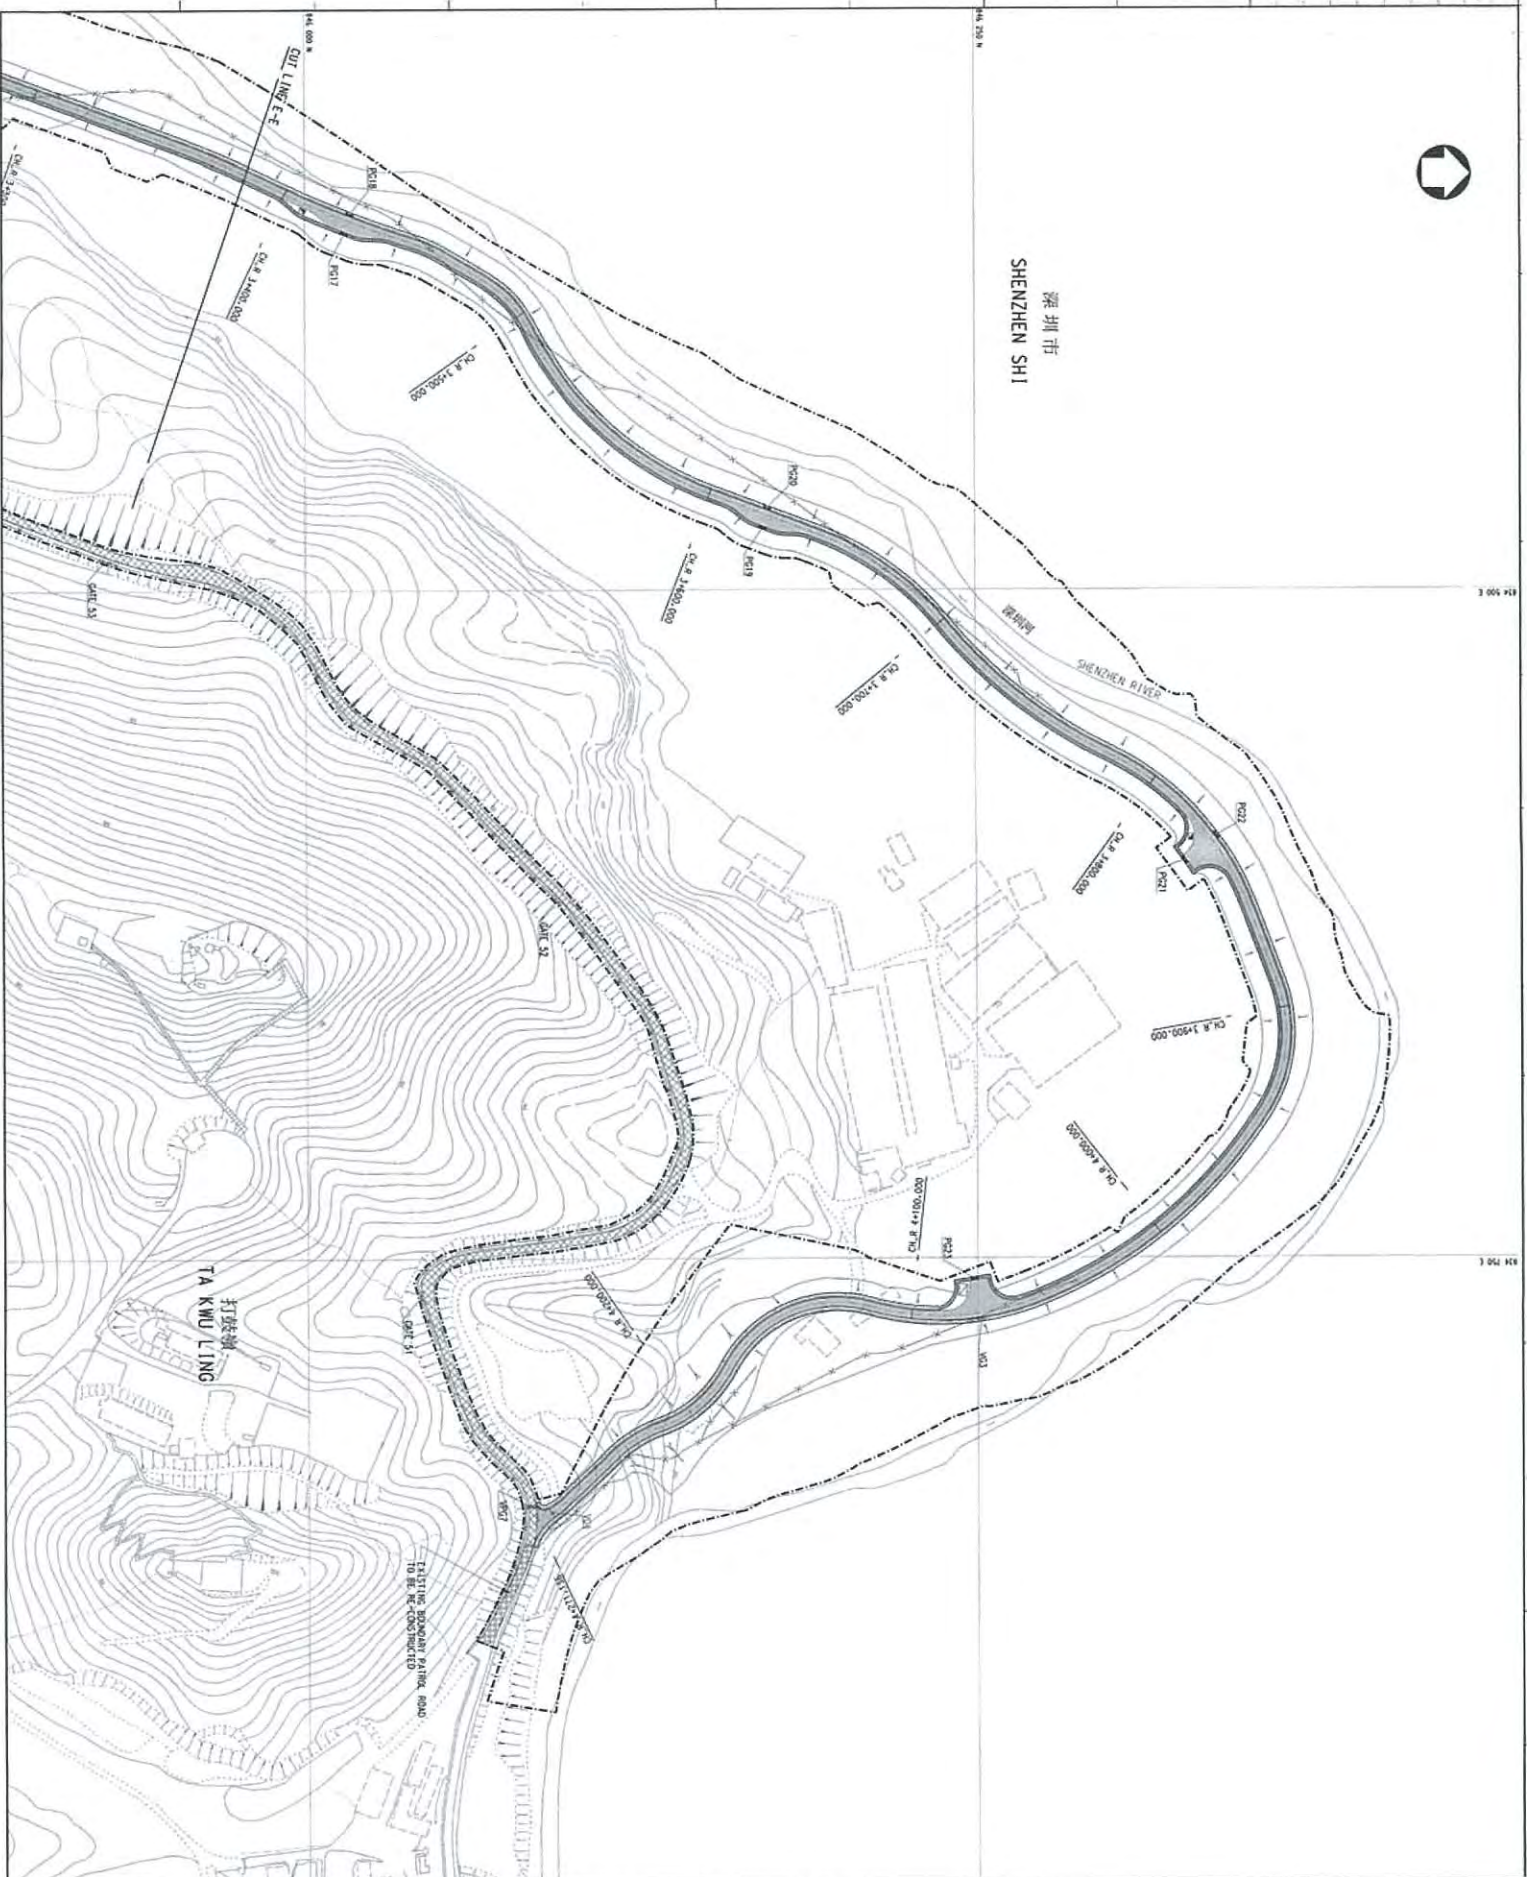

NOTES:  
1. FOR GENERAL NOTES & LEGEND, REFER TO  
DRAWING NO. DDP/DC/1106/1102/1.

NO.	DATE	DESCRIPTION	INITIAL
1	28 NOV 2011	DESIGNED	L. F. CHAN
2	28 NOV 2011	DRAWN	L. F. CHAN
3	28 NOV 2011	CHECKED	M. N. HOON
4	28 NOV 2011	APPROVED	L. C. LIU

Ag. Chief Engineer  
Date: 28 NOV 2011

contract no. DC/2011/06  
 title no. DP/8/501808  
 project no. 501808  
 contact

REPROVISIONING OF BOUNDARY PATROL ROAD  
AND ASSOCIATED SECURITY FACILITIES  
BETWEEN PING VIEN RIVER  
AND PAK TU SHAN AND DRAINAGE WORKS  
IN NORTH DISTRICT

drawing title  
GENERAL LAYOUT

1 SHEET & OF 51  
 drawing no. DDP/DC/1106/11026  
 scale 1:11000


COPYRIGHT RESERVED

DRAINAGE SERVICES DEPARTMENT  
 GOVERNMENT OF THE  
 HONG KONG  
 SPECIAL ADMINISTRATIVE REGION



***ANNEX B***

***ENVIRONMENTAL MANAGEMENT ORGANIZATION  
AND  
COMMUNICATION LINES***

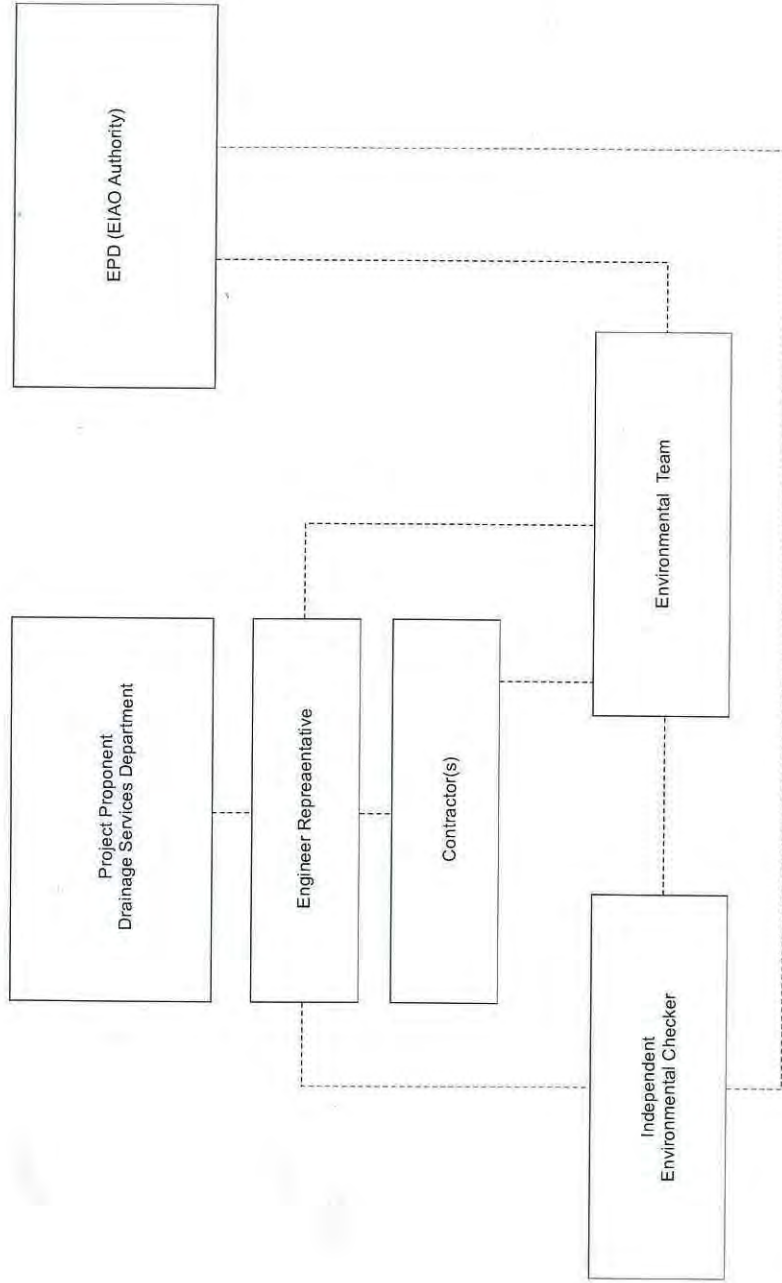

Key  
- - - - - Line of Communication

EM&A Organisation Chart

## KEY CONTACT INFORMATION UNDER THE CONTRACT

### Contact Details of Key Personnel

Organization	Project Role	Name of Key Staff	Tel No.	Fax No.
DSD	Project Proponent / Employer	Mr. Eric Y. M. Cheng	2594 7341	2827 8700
Environ	Independent Environmental Checker	Mr. Roger W. K. Leung	3465 2888	3548 6988
CHCC	Project Manager	Mr. Raymond Yau	2403 1165	2403 1165
SHCC	Site Agent	Mr. Elvin Lam	2640 9286	2640 9286
AUES	Environmental Team Leader	Mr. T. W. Tam	2959 6059	2959 6079
AUES	Environmental Consultant	Miss Nicola Hon	2959 6059	2959 6079
AUES	Environmental Team Supervisor	Mr. Ben Tam	2959 6059	2959 6079

### 24-Hour Hotline Telephone Number for the Public to Make Enquiries

<b>24-Hour Hotline: 6770 3827</b>
<b>Contact Person: Mr. Mocha Mok</b>

### Legends:

- DSD* (Project Proponent / Engineer) – Drainage Services Department  
*SHCC* (Main Contractor) – Sang Hing Civil Constructors Co., Ltd  
*Environ* (IEC) – Environ Hong Kong Limited  
*AUES* (ET) – Action-United Environmental Services & Consulting

**ANNEX C**

**IMPLEMENTATION SCHEDULE  
FOR ENVIRONMENTAL MITIGATION MEASURES**

## Annex D Implementation Schedule for Environmental Protection Measures

EIA Ref.	Environmental Protection Measures	Location/Duration of Measures/Timing of Completion of Measures	Implementati on Agent	Implementation Stage			Relevant Legislation & Guidelines
				Des C	Post-C	O	
<b>1. Air Quality</b>							
S4.8	<p>Dust control measures stipulated in the <i>Air Pollution Control (Construction Dust) Regulation</i> will be implemented during the construction phase to control the potential fugitive dust emissions. In particular:</p> <ol style="list-style-type: none"> <li>i. Water spraying on haul roads and dusty areas for every hour during construction;</li> <li>ii. Covering the stockpile areas of at least 70% area with tarpaulin sheet or impervious sheet;</li> <li>iii. Covering of dusty materials/spoils on trucks by impervious sheets;</li> <li>iv. Controlling the dropping height of fill materials;</li> <li>v. Covering or storing all debris and materials in a sheltered debris collection area;</li> <li>vi. Storing dredged sediment in a separate enclosed tank; and</li> <li>vii. Providing wheel washing facility at each exit of the works site.</li> </ol>	Whole Site / During Construction	Contractor			✓	Air Pollution Control (Construction Dust) Regulation
S4.8	Site practices such as regular maintenance and checking of the diesel powered mechanical equipment will be adopted to avoid any black smoke emissions and to minimize gaseous emissions.	Whole Site / During Construction	Contractor			✓	
<b>2. Construction Noise</b>							
S5.8	<p>The following site practices should be followed during the construction of the Project:</p> <ol style="list-style-type: none"> <li>i. Only well-maintained plant should be operated on-site and plant should be serviced regularly during the construction phase;</li> <li>ii. Silencers or mufflers on construction equipment should be utilized and should be properly maintained during the construction phase;</li> <li>iii. Mobile plant, if any, should be sited as far from NSRs as possible;</li> <li>iv. Machines and plant (such as trucks) that may be in intermittent use should be shut down between work periods or should be throttled down to a minimum;</li> <li>v. Plant known to emit noise strongly in one direction should, wherever possible, be orientated so that the noise is directed away from the nearby NSRs; and</li> <li>vi. Material stockpiles and other structures should be effectively utilised, wherever practicable, in screening noise from on-site construction activities.</li> </ol>	Whole Site / During Construction	Contractor			✓	
S5.8	Use quiet PME as far as practicable to mitigate the construction noise impacts.	Whole Site / During Construction	Contractor			✓	
S5.8	Use temporary noise barriers to mitigate the noise impact arising from the construction works, particularly for low-rise NSRs. Movable noise barriers of 3 m in height with skid footing should be used and located within a few metres of stationary plant and mobile plant such that the line of sight to the NSR is blocked by the barriers. The length of the barrier should be at least five times greater than its height. With reference to A Practical Guide for the Reduction of Noise from Construction Works, the noise barrier material should have a superficial surface density of at least 7 kg m <sup>-2</sup> and have no openings or gaps.	Works Area III and IV/ During Construction	Contractor			✓	A Practical Guide for the Reduction of Noise from Construction Works

S5.8	Scheduling of construction activities with identified grouping of PMEs.	Works Area III / During Construction	Contractor	✓			
S5.10	Monthly site inspection and audit of construction activities.	Whole Site / During Construction	ET & IEC	✓			EIAO
<b>3. Water Quality</b>							
S6.8	Maximum loss rate during the wet excavation should be kept at or below the limits specified in the EIA Report.	Excavation area / During Construction	Contractor	✓			
S6.8	<i>Construction Site Runoff and Drainage</i> Channels, earth bunds or sand bag barriers will be provided on site to direct stormwater to silt removal facilities. The design of silt removal facilities will make reference to the guidelines in Appendix A1 of ProPECC PN 1/94. All drainage facilities and erosion and sediment control structures will be inspected on a regular basis and maintained to confirm proper and efficient operation at all times and particularly during rainstorms. Deposited silt and grit will be removed regularly.	Land Site / During Construction	Contractor	✓			ProPECC PN 1/94 TM standard under the WPCO
S6.8	Non-active area along the river bank will be covered by impermeable sheets or hydroseeding completed sections immediately whenever possible to minimise erosion of soil by runoff particularly during heavy rainstorms	River bank / During Construction	Contractor	✓			
S6.8	Earthworks to form the final surfaces will be followed up with surface protection and drainage works to prevent erosion caused by rainstorms.	Land Site / During Construction	Contractor	✓			
S6.8	Appropriate surface drainage will be designed and provided where necessary. In particular, surface runoff will be collected along the river bank and be diverted to sedimentation tank/pond before being discharged into the river.	Land Site / During Construction	Contractor	✓			
S6.8	The precautions to be taken at any time of year when rainstorms are likely together with the actions to be taken when a rainstorm is imminent or forecasted and actions to be taken during or after rainstorms are summarised in Appendix A2 of ProPECC PN 1/94.	Land Site / During Construction	Contractor	✓			ProPECC PN 1/94 TM
S6.8	Oil interceptors will be provided in the drainage system where necessary and regularly emptied to prevent the release of oil and grease into the storm water drainage system after accidental spillages.	Land Site / During Construction	Contractor	✓			
S6.8	Temporary and permanent drainage pipes and culverts provided to facilitate runoff discharge will be adequately designed for the controlled release of storm flows	Land Site / During Construction	Contractor	✓			
S6.8	The temporary diverted drainage will be reinstated to the original condition when the construction work has finished or when the temporary diversion is no longer required.	Land Site / During Construction	Contractor	✓			
S6.8	An adequate number of portable toilets will be provided for the on-site construction workforce. Wastewater/sewage will be handled by registered collector in Hong Kong.	Whole Site / During Construction	Contractor	✓			
S6.8	Debris and refuse generated on-site will be collected, handled and disposed of properly to avoid entering the nearby WSRs. Stockpiles of cement and other construction materials will be covered when not being used.	Whole Site / During Construction	Contractor	✓			
S6.8	Oil leakage or spillage will be contained and clean up immediately. Waste oil will be collected and stored for recycling or disposal, in accordance with the Waste Disposal Ordinance.	Whole Site / During Construction	Contractor	✓			Waste Disposal Ordinance

4. Terrestrial Ecology									
S7.11	Avoid potential impacts on the trees whenever possible during the detailed design stage. The retained trees will be fenced off as protection from the construction works. If the trees cannot be avoided due to the engineering constraint, the affected individual(s) will be transplanted to compensatory woodland planting site near Pak Fu Shan or a similar habitat in the vicinity of the Project Site if considered suitable (subject to the detailed assessment of the feasibility of transplantation).	Whole Site / During Construction	Contractor	✓	✓				
S7.11	A detailed vegetation survey on the trees within the impacted area would be conducted by a suitably qualified botanist/ ecologist to identify and record the affected individuals prior to the commencement of site clearance works. Feasibility and suitability of transplanting the affected plant species of conservation interest would be carefully studied and suitable receptor sites would be identified during Tree Felling Application.	Whole Site / During Construction	Contractor	✓	✓				
S7.11	Avoid any damage and disturbance, particularly those caused by filling and illegal dumping, to the surrounding habitats through proper management of waste disposal.	Whole Site / During Construction	Contractor	✓	✓				
S7.11	Regularly check the Site boundaries to ensure that they are not breached and that no damage occurs to surrounding areas Whole Site / During	Whole Site / During Construction	Contractor	✓	✓				
S7.11	Prohibit and prevent open burning within the site boundary during construction and provide temporary fire fighting equipment in the work areas.	Whole Site / During Construction	Contractor	✓	✓				
S7.11	Reinstate temporary work sites/disturbed areas immediately after completion of the construction works	Whole Site / During Construction	Contractor	✓	✓				
S7.11	Provide additional stream/river habitat with natural bottom (~2.1 ha) after the advanced works	Whole Site / During Construction	Contractor	✓	✓				
S7.14	Adopt proper ecological design for the landscape works along the river banks, including the floodplain (the 1.9ha marshy low-lying grassland will be reinstated in the floodplains at Hong Kong side.	Along river bank and water retardation pond / During Design Stage	Designer(s)	✓					
S7.14	The implementation of landscape works (including compensatory planting) adopting ecological design at Hong Kong side shall be monitored.	Whole Site / During Construction	Designer(s)		✓				
S7.14	One-year bird monitoring programme shall be conducted to monitor the effectiveness of the re-provisioned/reinstated habitats	Operation	Project Proponent/ Contractor					✓	
5. Waste Management									
S9.6	<u>General</u> The Contractor shall apply for and obtain the appropriate licenses for the disposal of public fill, chemical waste and effluent discharges	Contract mobilisation / During construction	Contractor	✓					Waste Disposal (Chemical Waste) (General) Regulation; Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes; WBTC No 5/99, Trip ticket System for Disposal of Construction and Demolition Material; Water Pollution Control Ordinance

S9.6	Nomination of approved personnel to be responsible for standard site practices, arrangements for collection and effective disposal to an appropriate facility of all wastes generated at the Project Site	Contract mobilisation / During construction	Contractor	✓		
S9.6	Training shall be provided to site personnel in proper waste management and chemical handling procedures, the concepts of site cleanliness and appropriate waste management procedures, including waste reduction, reuse and recycling.	Contract mobilisation / During construction	Contractor	✓		
S9.6	Provision of sufficient waste disposal points and regular collection for disposal.	Whole Site / During Construction	Contractor	✓		WBTC Nos. 6/2002 and 6/2002A, Enhanced Specification for Site Cleanliness and Tidiness. Works Bureau, Hong Kong SAR Government
S9.6	Appropriate measures to reduce windblown litter and dust transportation of waste by either covering trucks or by transporting wastes in enclosed containers	Whole Site / During Construction	Contractor	✓		
S9.6	Separation of chemical wastes for special handling and appropriate Treatment Chemical Waste Treatment Centre at Tsing Yi.	Whole Site / During Construction	Contractor	✓		Waste Disposal (Chemical Waste) (General) Regulation
S9.6	Regular cleaning and maintenance programme for drainage systems, sumps and oil interceptors	Whole Site / During Construction	Contractor	✓		
S9.6	A recording system for the amount of wastes generated/recycled and disposal sites.	Whole Site / During Construction	Contractor	✓		
S9.6	<i>Waste Reduction Measures</i> i. Segregation and storage of different types of waste in different containers, skips or stockpiles to enhance reuse or recycling of material and their proper disposal. ii. Encourage collection of aluminium cans and waste paper by individual collectors during construction with separate labelled bins provided to segregate these wastes from other general refuse by the workforce. iii. Any unused chemicals and those with remaining functional capacity will be recycled as far as possible	Whole Site / During Construction	Contractor	✓		WBTC Nos. 6/2002 and 6/2002A, Enhanced Specification for Site Cleanliness and Tidiness
S9.6	iv. Use of reusable non-timber formwork to reduce the amount of C&D materials	Whole Site / During Construction	Contractor	✓		Works Branch Technical Circular (WBTC) No.32/92, The Use of Tropical Hard Wood on Construction Site
S9.6	v. Prior to disposal of construction waste, wood, steel and other metals will be separated to the extent practical, for re-use and/or recycling to reduce the quantity of waste to be disposed of to landfill	Whole Site / During Construction	Contractor	✓		
S9.6	vi. Proper storage and site practices shall be adopted to reduce the potential for damage or contamination of construction materials					
S9.6	vii. Plan and stock construction materials carefully to reduce amount of waste generated and avoid unnecessary generation of waste					



S9.6	<p><b>Excavated Materials</b></p> <p>The contractor of the advanced work should open a billing account with EPD for the payment of disposal charges. A trip-ticket system will be established in accordance with ETWB TC(W) No. 31/2004 to monitor the reuse of surplus excavated materials off-site and disposal of construction waste and general refuse at landfills, and to control fly-tipping</p>	Contract mobilisation / During construction	Contractor	✓	✓	Waste Disposal (Charges for Disposal of Construction Waste) Regulation ETWB TC(W) No.31/2004
S9.6	<p>Ways to minimise generation of C&amp;D materials include:</p> <p>(i) The Contractor is required to submit the Waste Management Plan (WMP) for approval by the Engineer with appropriate mitigation measures to deal with and allow space for waste segregation. Different C&amp;D materials should be sorted into different categories for re-use/recycle. Day-to-day site operations of the Contractor should be closely monitored to ensure compliance with the approved WMP.</p> <p>(ii) The designer shall ensure that the design of levels and dimensions are reasonably accurate to avoid unnecessary demolition, excavation and fill.</p> <p>(iii) The Contractor shall be encouraged to use long lasting materials such as steel and poly-fibre for formwork on site.</p> <p>(iv) The RSS shall control the disposal of public fill and C&amp;D waste to the designated public filling facilities and landfills respectively through the implementation of a trip-ticket system according to ETWB TC(W) No. 31/2004.</p>	Whole Site / During Construction	Contractor	✓		
	<p>Ways to maximize the use of inert C&amp;D material include:</p> <p>i. The Contractor shall review the WMP quarterly to improve the site practice and maximise the use of inert C&amp;D material</p> <p>ii. Different sections of works shall be programmed to ensure the C&amp;D materials generated could be re-used by the other sections of works or works contracts.</p> <p>iii. Temporary storage areas should be identified to resolve programming mismatch between excavation and filling works.</p> <p>iv. The excavated soft inert C&amp;D materials should be reused for backfilling the boundary patrol road, channel embankment, etc. whenever practicable.</p> <p>v. Good quality top soil should be reused for landscaping.</p>	Whole Site / During Construction	Contractor	✓		
	<p>Ways to maximise the re-use/recycle of C&amp;D material and/or rock on site include:</p> <p>i. Recyclable materials such as wood and metal should be salvaged for reuse and inert materials utilized as public fill.</p> <p>ii. Segregation and storage of different types of waste in different containers, skips or stockpiles to enhance reuse or recycling of material and their proper disposal. Prior to disposal of C&amp;D waste, it is recommended that wood, steel and other metals be separated for re-use and/or recycling and inert waste utilized as fill material to minimize the quantity of waste to be disposed of at landfills.</p>	Whole Site / During Construction	Contractor	✓		
S9.6	<p>Ways to maximise the use of recycled C&amp;D materials include:</p> <p>i. Relevant clauses would be incorporated in the Particular Specifications to facilitate the use of recycled aggregates as far as practicable, such as, temporary works, general fills and road sub-base.</p>	Whole Site / During Construction	Contractor	✓		
S9.6	<p>To reduce the potential dust impacts of the excavation works, the C&amp;D materials will be wetted as quickly as possible to the extent practice after filling.</p>	Whole Site / During Construction	Contractor	✓		


S9.6	<p><i>Chemical Waste</i> Containers used for storage of chemical waste shall be:</p> <ol style="list-style-type: none"> <li>Maintained in good condition and clearly labelled in both English and Chinese;</li> <li>Suitable for the substance they are holding, resistant to corrosion, and securely closed; and</li> <li>Capacity of less than 450 L unless the specifications have been approved by the EPD.</li> </ol>	All facilities / During construction	Contractor	✓		Waste Disposal (Chemical Waste) (General) Regulation Code of Practice on the Packaging, Labelling, and Storage of Chemical Wastes
S9.6	<p>Storage areas for chemical waste shall:</p> <ol style="list-style-type: none"> <li>Be clearly labelled and used solely for the storage of chemical waste;</li> <li>Be enclosed on at least 3 sides;</li> <li>Have adequate ventilation;</li> <li>Be arranged so that incompatible materials are appropriately separated</li> <li>Have an impermeable floor and bunding, of capacity to accommodate 110% of the volume of the largest container or 20% by volume of the chemical waste stored in that area, whichever is the greatest; and</li> <li>Be covered to prevent rainfall from entering</li> </ol>	All facilities / During construction	Contractor	✓		
S9.6	Any unused chemicals and those with remaining functional capacity shall be recycled to the extent practical.	Land Site / During Construction	Contractor	✓		
S9.6	A licensed contractor shall be employed to collect chemical waste for delivery to a licensed treatment facility.	Chemical Waste Treatment Centre at Tsing Yi/ During construction	Contractor	✓		Waste Disposal (Chemical Waste) (General) Regulation Code of Practice on the Packaging, Labelling, and Storage of Chemical Wastes
S9.6	<p><i>General Refuse</i> General refuse shall be timely cleared and shall be disposed of to the nearest licensed facility by reputable waste collector on regular basis to reduce odour, pest and litter impacts.</p>	All areas / During construction	Contractor	✓		WBTC Nos. 6/2002 and 6/2002A, Enhanced Specification for Site Cleanliness and Tidiness.
S9.6	No waste shall be burnt on site. Wastes shall be collected by licensed waste haulier and be disposed of at licence sites.	Land Site / During Construction	Contractor	✓		Air Pollution Control Ordinance
S9.6	Training will be provided to workers on the concepts of site cleanliness and appropriate waste management procedures, including waste reduction, reuse and recycling at the beginning of the construction works.	All areas / During construction	Contractor	✓		
S9.8	EM&A of waste handling, storage, transportation, disposal procedures and documentation through the site inspection and audit programme shall be undertaken.	All facilities / During construction	ET and IEC	✓		
S9.8	Waste Management Plan (WMP) will be prepared and implemented in accordance with ETWB TC(W) No. 19/2005.	All facilities / During construction	Contractor	✓		ETWB TC(W) No.19/2005

<b>6. Cultural Heritage</b>						
				Project Proponent	Whole Site / During Construction	Antiquities and Monuments Ordinance
S11.8.1	Pursuant to the Antiquities and Monuments Ordinance, the project proponent should inform the AMO immediately in case of discovery of antiquities or supposed antiquities in the course of soil excavation works in construction stage.		✓			
S11.8.1	In case the works boundary of the Project changes during the detailed design stage to cover additional area not being assessed, the need for further archaeological survey and subsequent impact assessment should be reviewed and AMO should be consulted.	Design Team and the Project Proponent (i.e. DSD)			Additional works boundary not covered in EIA / During design stage	EIAO TM, Guidelines for CHIA, Antiquities and Monuments Ordinance
<b>7. Landscape &amp; Visual</b>						
S12.6.10	MM1: Tree Protection and Preservation - Trees/ woodland within the Project Site will be protected and preserved as far as possible in accordance with ETWB TCW No. 29/2004 and 3/2006.	Contractor	✓		Land Site / During Construction	
S12.6.10	MM2: Tree Transplantation – Should removal of trees be unavoidable due to construction impacts, trees will be transplanted or felled according to the Detailed Tree Survey and Tree Felling Application. Established trees of value are to be re-located where practically feasible.	Contractor(s)	✓		Land site / During Construction	
S12.6.10	MM3: Minimize Disturbance – temporary structures and construction works should be planned with care to minimize disturbance to existing built structures as well as vegetation including riparian vegetation along the river.	Contractor	✓		Land Site / During Construction	
S12.6.10	MM4: Compensatory Tree Planting - Where loss of existing trees is unavoidable, compensatory planting of trees should be provided in accordance with ETWB TCW No. 03/2006 to compensate for those trees felled. Space is to be allowed within the Project Site (mainly planting in riverbank landscape areas of ~4.1 ha) for such planting. Plants will have 12 months to establish. Approximately 0.5 ha of compensatory woodland planting (in addition to the reinstatement of the woodland (LR4) if unavoidably affected) will be provided within the Project Site near Pak Fu Shan. The proposed compensatory woodland planting site will locate adjoining to the reinstated and existing (undisturbed by the Project) woodland on hillside. The selection of planting species shall be made with reference to the species identified in the Tree Survey and be native to Hong Kong or the South China region. The compensatory woodland planting should also adopt ecological design, ie provision of rare butterfly species larval food plant (Trema sp.), and further details refer to Section 7.1.3 of the EIA Report. The arrangement of the on-site compensatory planting, ie tree/ shrub mix and Trema sp., will be subject to detailed landscape design and planting plan, and recommended to be implemented prior to the construction activities as far as practical	Contractor	✓		Compensatory planting area / During Construction	
S12.6.10	MM5: Screening – Stockpiles of materials should be covered or hoarding erected where possible to reduce undesirable views of the construction site (such as stockpile areas), having consideration of safety and security. It is proposed that screening be compatible with the surrounding environment and where possible, non-reflective, recessive colours be used. Hoarding should be taken down at the end of the construction period.	Contractor	✓		Land Site / During Construction	


S12.6.10	MM6: Light Control – Control of night time lighting glare shall be implemented to minimize glare impact to adjacent VSRs.	Whole Site / During Construction	Contractor	✓			
S12.6.10	MM7: Reinstatement – Terrestrial areas temporarily disturbed by the Project during construction, should be re-vegetated with shrubs, ground cover or grass in order to restore the green ambience or LR as existed before the commencement of the Project to blend with the new environment, eg the earth embankment underneath the boundary patrol road near Pak Fu Shan should be planted to ensure the embankment structure blends in with the new environment.	Whole Site / During Construction	Contractor	✓			
S12.6.10	MM8: Buffer Planting – Tree and Shrub planting shall be provided for screening the natural watercourse, woodland and shrubby grassland on lowland, proposed boundary control road and fencing, where needed and taking into account security and boundary control limitations.	Appropriate location / During Construction	Contractor	✓			
S12.6.10	MM9: River Area Enhancement Landscaping – The river bed should be nonconcreted as far as practical. The River bank and margins of approximately 4.1 ha should be enhanced with vegetation to compensate for the loss of existing vegetation and to enhance the visual and landscape value of the river where slope gradient allows. The typical design of riverbank landscaping areas for the Project is presented in Section 7.11.3 and Figure 7.11 of the EIA Report. The overall objectives for the landscaping works will be mainly concerned with ecological enhancement but also include landscape enhancement. For the sloping banks of the river, in order to guarantee safety of flood prevention, ecologically and environmentally friendly materials will be used as far as possible. The preliminary proposed landscape treatment along the sloping river banks can be classified into three types: natural vegetation, semi-natural and artificial. Further details of the river area enhancement plans can be found in Section 3 of the EIA Report, including protection of river bed with armour rock only where necessary and provision of grassed, cellular, reinforced concrete eco-friendly slope protection. Eco-bags are made of UV-resistant Polyethylene gas filled with fiber soil. Final details of the landscaping will be prepared during the detailed design stage of the Project.	Appropriate location / During Construction	Contractor	✓	✓		
S12.6.10	MM11: Floodplain Areas - The areas bound by sharp turns in the natural meander of the river should be made into floodplain areas to retain some of the riparian landscape at the river margins. The overall objectives for the landscaping works will be mainly concerned with ecological enhancement but also include landscape enhancement (also refer to Section 7.11.3 of the EIA Report). Further details will be developed during Detailed Design Stage.	Floodplain areas / During Construction	Contractor	✓	✓		
S12.6.10	MM12: Colours of Structures - Colours for the structures eg fences should be chosen to complement the surrounding area. Lighter colours such as shades of light grey, off-white and light brown may be utilised where technically feasible to reduce the visibility of the structures.	Whole Site / During Construction	Contractor	✓			
S12.6.10	MM13: Topsoil Reuse - Excavated topsoil should be conserved for re-use by the Project or other projects.	Whole Site / During Construction	Contractor	✓			
S12.9	The completed landscape works adopting ecological design on the Hong Kong side will be monitored during the one year establishment period.	Whole site / During 1 year Establishment period	Landscape Contractor	✓			

***ANNEX D***

***THREE-MONTH ROLLING PROGRAM***

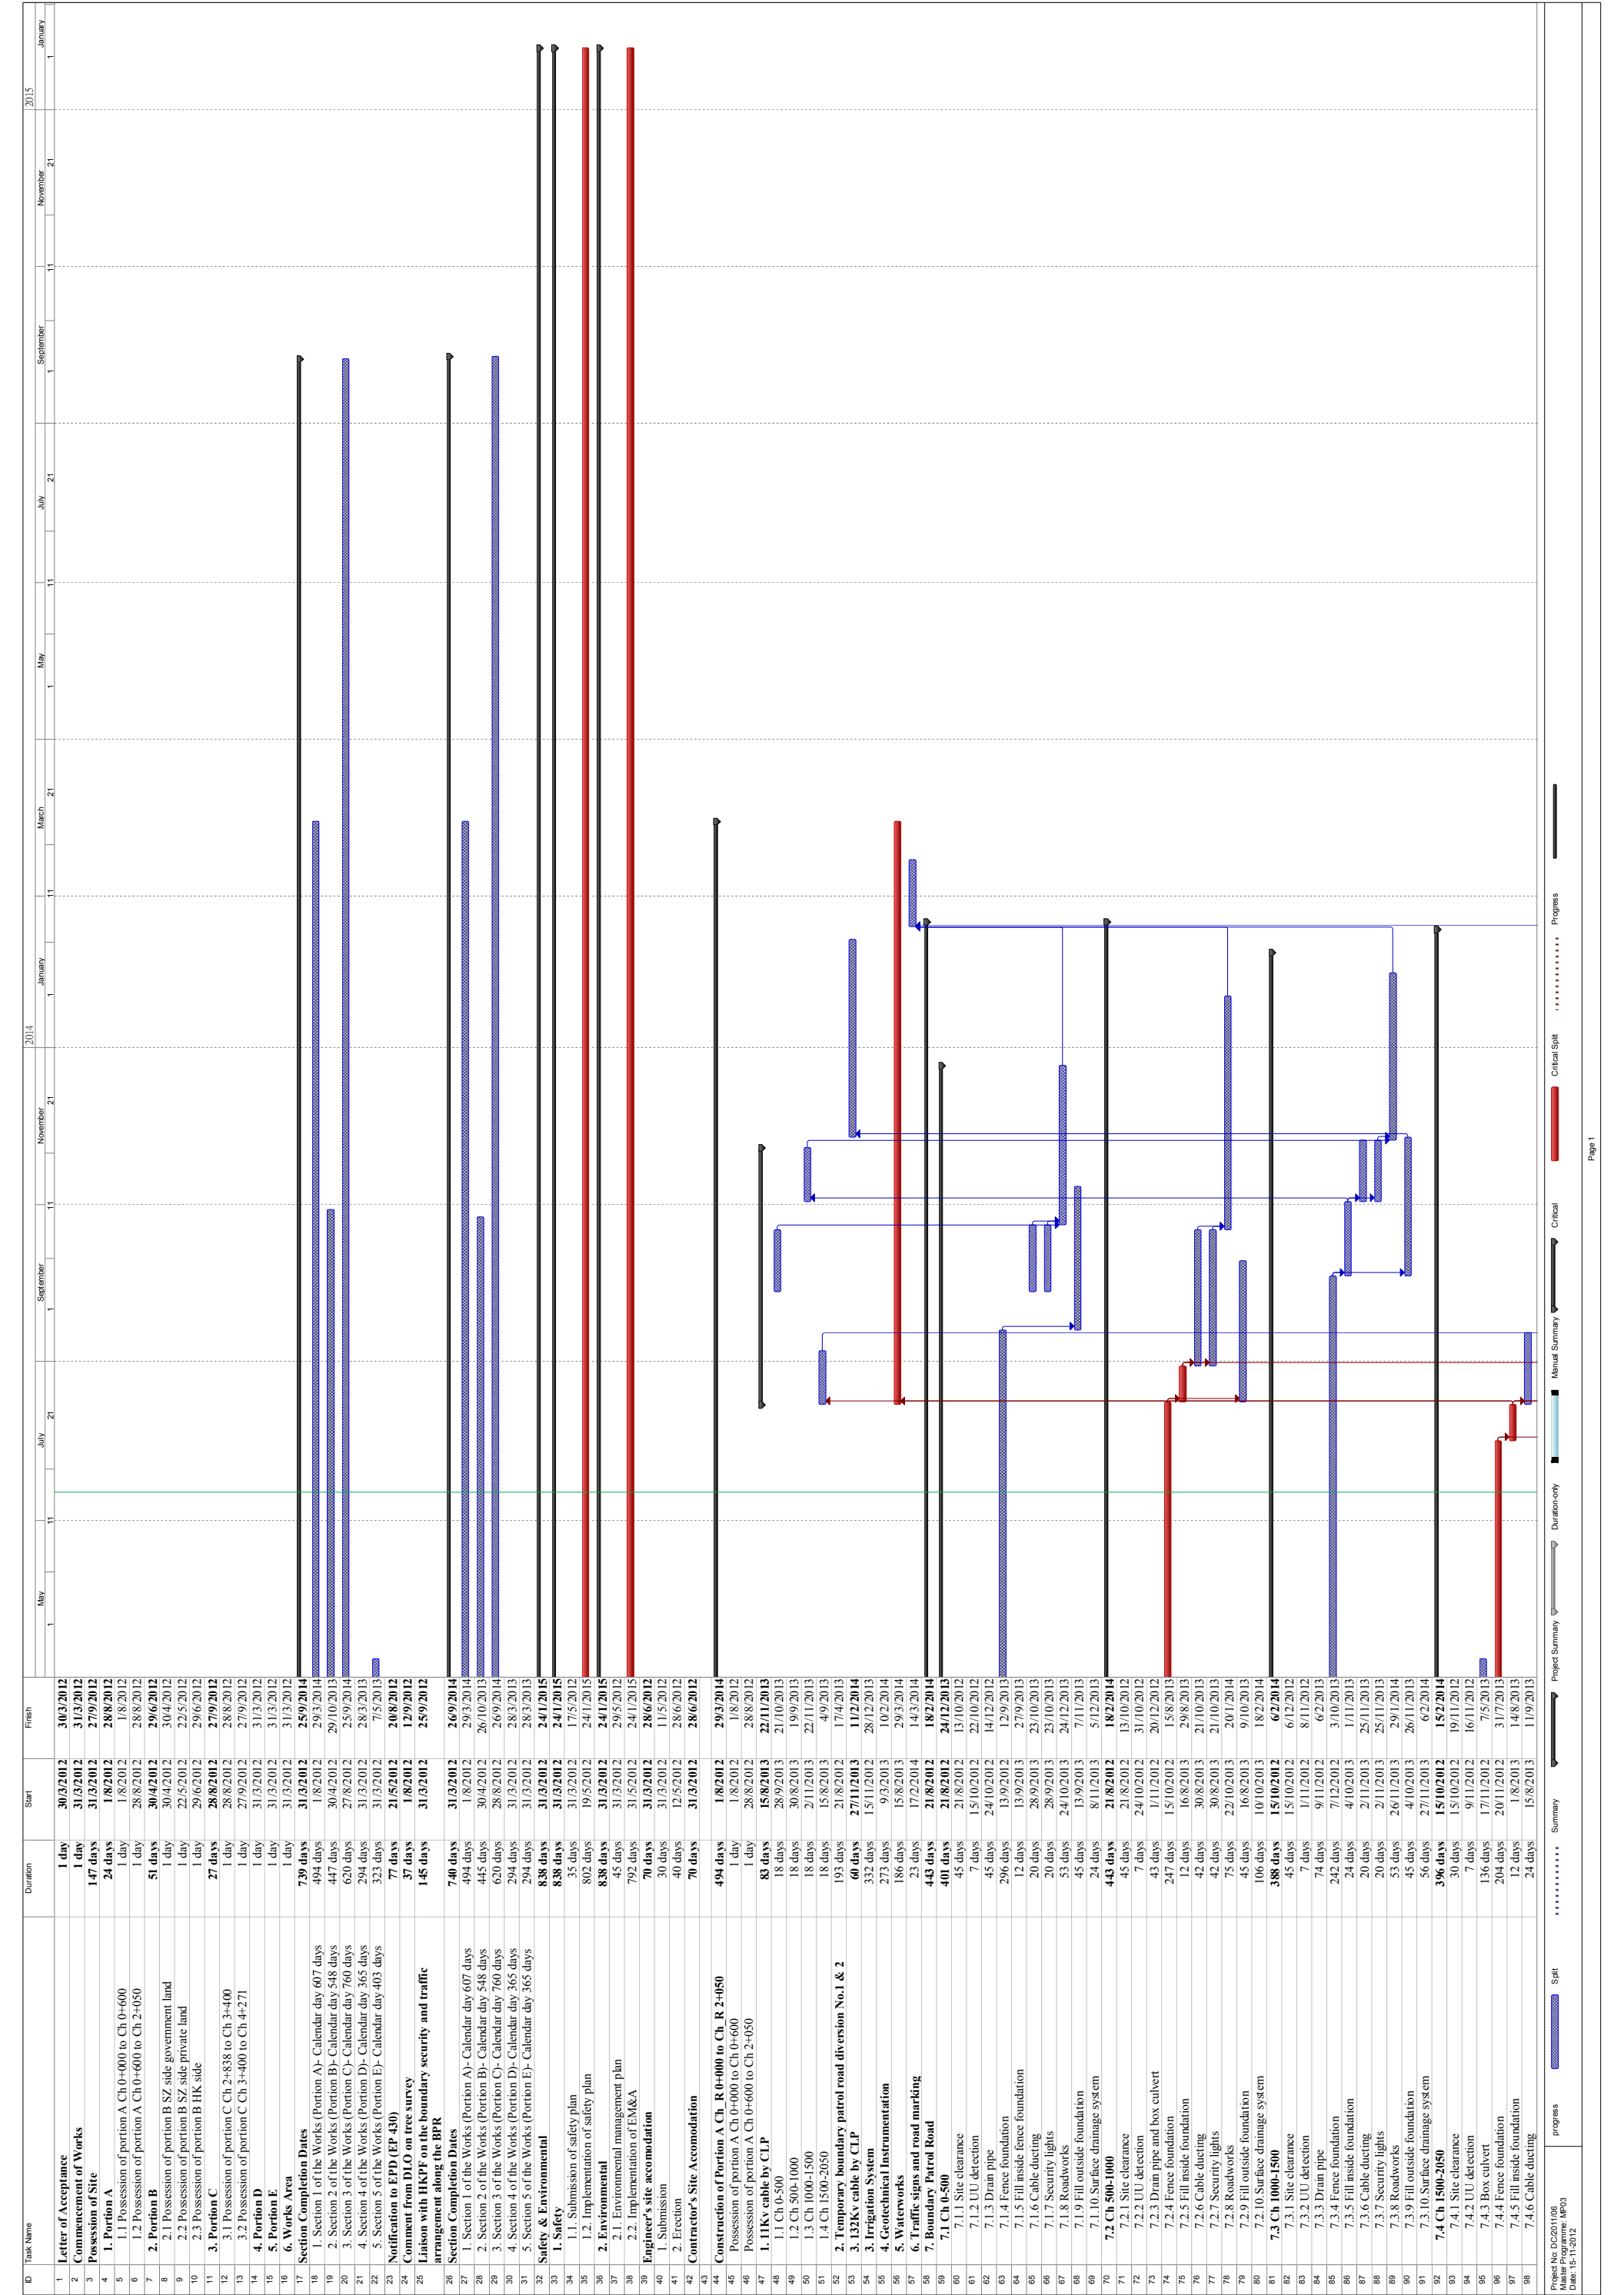

ID	Task Name	Duration	Start	Finish
1	Letter of Acceptance	1 day	30/3/2012	30/3/2012
2	Commencement of Works	1 day	31/3/2012	31/3/2012
3	Possession of Site	147 days	31/3/2012	27/9/2012
4	1. Portion A	24 days	1/8/2012	28/8/2012
5	1.1 Possession of portion A Ch.0+000 to Ch.0+600	1 day	1/8/2012	1/8/2012
6	1.2 Possession of portion A Ch.0+600 to Ch.2+050	1 day	28/8/2012	28/8/2012
7	2. Portion B	51 days	30/4/2012	29/6/2012
8	2.1 Possession of portion B SZ side government land	1 day	30/4/2012	30/4/2012
9	2.2 Possession of portion B SZ side private land	1 day	22/5/2012	22/5/2012
10	2.3 Possession of portion B HK side	1 day	29/6/2012	29/6/2012
11	3. Portion C	27 days	28/8/2012	27/9/2012
12	3.1 Possession of portion C Ch.2+838 to Ch.3+400	1 day	28/8/2012	28/8/2012
13	3.2 Possession of portion C Ch.3+400 to Ch.4+271	1 day	27/9/2012	27/9/2012
14	4. Portion D	1 day	31/3/2012	31/3/2012
15	5. Portion E	1 day	31/3/2012	31/3/2012
16	6. Works Area	1 day	31/3/2012	31/3/2012
17	Section Completion Dates	739 days	31/3/2012	25/9/2014
18	1. Section 1 of the Works (Portion A)- Calendar day 607 days	494 days	1/8/2012	29/3/2014
19	2. Section 2 of the Works (Portion B)- Calendar day 548 days	447 days	30/4/2012	26/10/2013
20	3. Section 3 of the Works (Portion C)- Calendar day 760 days	620 days	27/8/2012	2/6/2014
21	4. Section 4 of the Works (Portion D)- Calendar day 365 days	294 days	31/3/2012	28/3/2013
22	5. Section 5 of the Works (Portion E)- Calendar day 403 days	323 days	31/3/2012	7/5/2013
23	Notification to EPD (EP 430)	77 days	21/5/2012	20/8/2012
24	Comment from DLO on tree survey	37 days	1/8/2012	12/9/2012
25	Liaison with HKPF on the boundary security and traffic arrangement along the BPR	145 days	31/3/2012	25/9/2012
26	Section Completion Dates	740 days	31/3/2012	26/9/2014
27	1. Section 1 of the Works (Portion A)- Calendar day 607 days	494 days	1/8/2012	29/3/2014
28	2. Section 2 of the Works (Portion B)- Calendar day 548 days	447 days	30/4/2012	26/10/2013
29	3. Section 3 of the Works (Portion C)- Calendar day 760 days	620 days	27/8/2012	2/6/2014
30	4. Section 4 of the Works (Portion D)- Calendar day 365 days	294 days	31/3/2012	28/3/2013
31	5. Section 5 of the Works (Portion E)- Calendar day 403 days	294 days	31/3/2012	28/3/2013
32	Safety & Environmental	838 days	31/3/2012	24/1/2015
33	1. Safety	838 days	31/3/2012	24/1/2015
34	1.1. Submission of safety plan	35 days	31/3/2012	17/5/2012
35	1.2. Implementation of safety plan	802 days	19/5/2012	24/1/2015
36	2. Environmental	838 days	31/3/2012	24/1/2015
37	2.1. Environmental management plan	45 days	31/3/2012	29/5/2012
38	2.2. Implementation of EM&A	792 days	31/3/2012	24/1/2015
39	Engineer's site accommodation	70 days	31/3/2012	28/6/2012
40	1. Submission	30 days	31/3/2012	11/5/2012
41	2. Erection	40 days	12/5/2012	28/6/2012
42	Contractor's Site Accommodation	70 days	31/3/2012	28/6/2012
43	Construction of Portion A Ch. R 0+000 to Ch. R 2+050	494 days	1/8/2012	29/3/2014
44	Possession of portion A Ch. 0+000 to Ch.0+600	1 day	1/8/2012	1/8/2012
45	Possession of portion A Ch. 0+600 to Ch.2+050	1 day	28/8/2012	28/8/2012
46	1. 11Kv cable by CLP	83 days	15/8/2013	22/11/2013
47	1.1 Ch.0-500	18 days	28/9/2013	21/10/2013
48	1.2 Ch.500-1000	18 days	30/8/2013	19/9/2013
49	1.3 Ch.1000-1500	18 days	21/11/2013	22/11/2013
50	1.4 Ch.1500-2050	18 days	15/8/2013	4/9/2013
51	2. Temporary boundary patrol road diversion No.1 & 2	195 days	21/8/2012	17/4/2013
52	3. 132Kv cable by CLP	60 days	27/11/2013	11/2/2014
53	3.1 Irrigation System	332 days	15/11/2012	28/12/2013
54	3.2 Geotechnical Instrumentation	273 days	9/3/2013	10/2/2014
55	5. Waterworks	186 days	15/8/2013	29/3/2014
56	6. Traffic signs and road marking	23 days	17/2/2014	14/3/2014
57	7. Boundary Patrol Road	443 days	21/8/2012	18/2/2014
58	7.1 Ch.0-500	401 days	21/8/2012	24/12/2013
59	7.1.1 Site clearance	45 days	21/8/2012	13/10/2012
60	7.1.2 UU det ection	7 days	15/10/2012	22/10/2012
61	7.1.3 Drain pipe	45 days	24/10/2012	14/12/2012
62	7.1.4 Fence foundation	296 days	13/9/2012	12/9/2013
63	7.1.5 Fill inside fence foundation	12 days	13/9/2012	27/9/2013
64	7.1.6 Cable ducting	20 days	28/9/2012	23/10/2013
65	7.1.7 Security lights	20 days	28/9/2012	23/10/2013
66	7.1.8 Roadworks	53 days	24/10/2013	24/12/2013
67	7.1.9 Fill outside foundation	45 days	13/9/2012	7/11/2013
68	7.1.10 Surface drainage system	24 days	8/11/2013	5/12/2013
69	7.2 Ch.500-1000	443 days	21/8/2012	18/2/2014
70	7.2.1 Site clearance	45 days	21/8/2012	13/10/2012
71	7.2.2 UU det ection	7 days	24/10/2012	31/10/2012
72	7.2.3 Drain pipe and box culvert	247 days	17/12/2012	20/12/2012
73	7.2.4 Fence foundation	12 days	16/8/2013	29/8/2013
74	7.2.5 Fill inside foundation	42 days	30/8/2013	21/10/2013
75	7.2.6 Cable ducting	42 days	30/8/2013	21/10/2013
76	7.2.7 Security lights	75 days	22/10/2013	20/1/2014
77	7.2.8 Roadworks	45 days	16/8/2013	9/10/2013
78	7.2.9 Fill outside foundation	106 days	10/10/2013	18/2/2014
79	7.2.10 Surface drainage system	388 days	15/10/2012	6/2/2014
80	7.3 Ch.1000-1500	45 days	15/10/2012	6/12/2012
81	7.3.1 Site clearance	7 days	11/11/2012	8/11/2012
82	7.3.2 UU det ection	74 days	9/11/2012	6/2/2013
83	7.3.3 Drain pipe	24 days	4/10/2013	1/11/2013
84	7.3.4 Fence foundation	20 days	21/12/2013	25/11/2013
85	7.3.5 Fill inside foundation	20 days	21/12/2013	25/11/2013
86	7.3.6 Cable ducting	53 days	26/11/2013	29/1/2014
87	7.3.7 Security lights	45 days	4/10/2013	26/11/2013
88	7.3.8 Roadworks	56 days	27/11/2013	6/2/2014
89	7.3.9 Fill outside foundation	396 days	15/10/2012	15/2/2014
90	7.3.10 Surface drainage system	30 days	13/10/2012	19/11/2012
91	7.4 Ch.1500-2050	7 days	9/11/2012	16/11/2012
92	7.4.1 Site clearance	136 days	17/11/2012	7/5/2013
93	7.4.2 UU det ection	204 days	20/11/2012	31/7/2013
94	7.4.3 Box culvert	12 days	1/8/2013	14/8/2013
95	7.4.4 Fence foundation	24 days	15/8/2013	11/9/2013
96	7.4.5 Fill inside foundation	24 days	15/8/2013	11/9/2013
97	7.4.6 Cable ducting	24 days	15/8/2013	11/9/2013

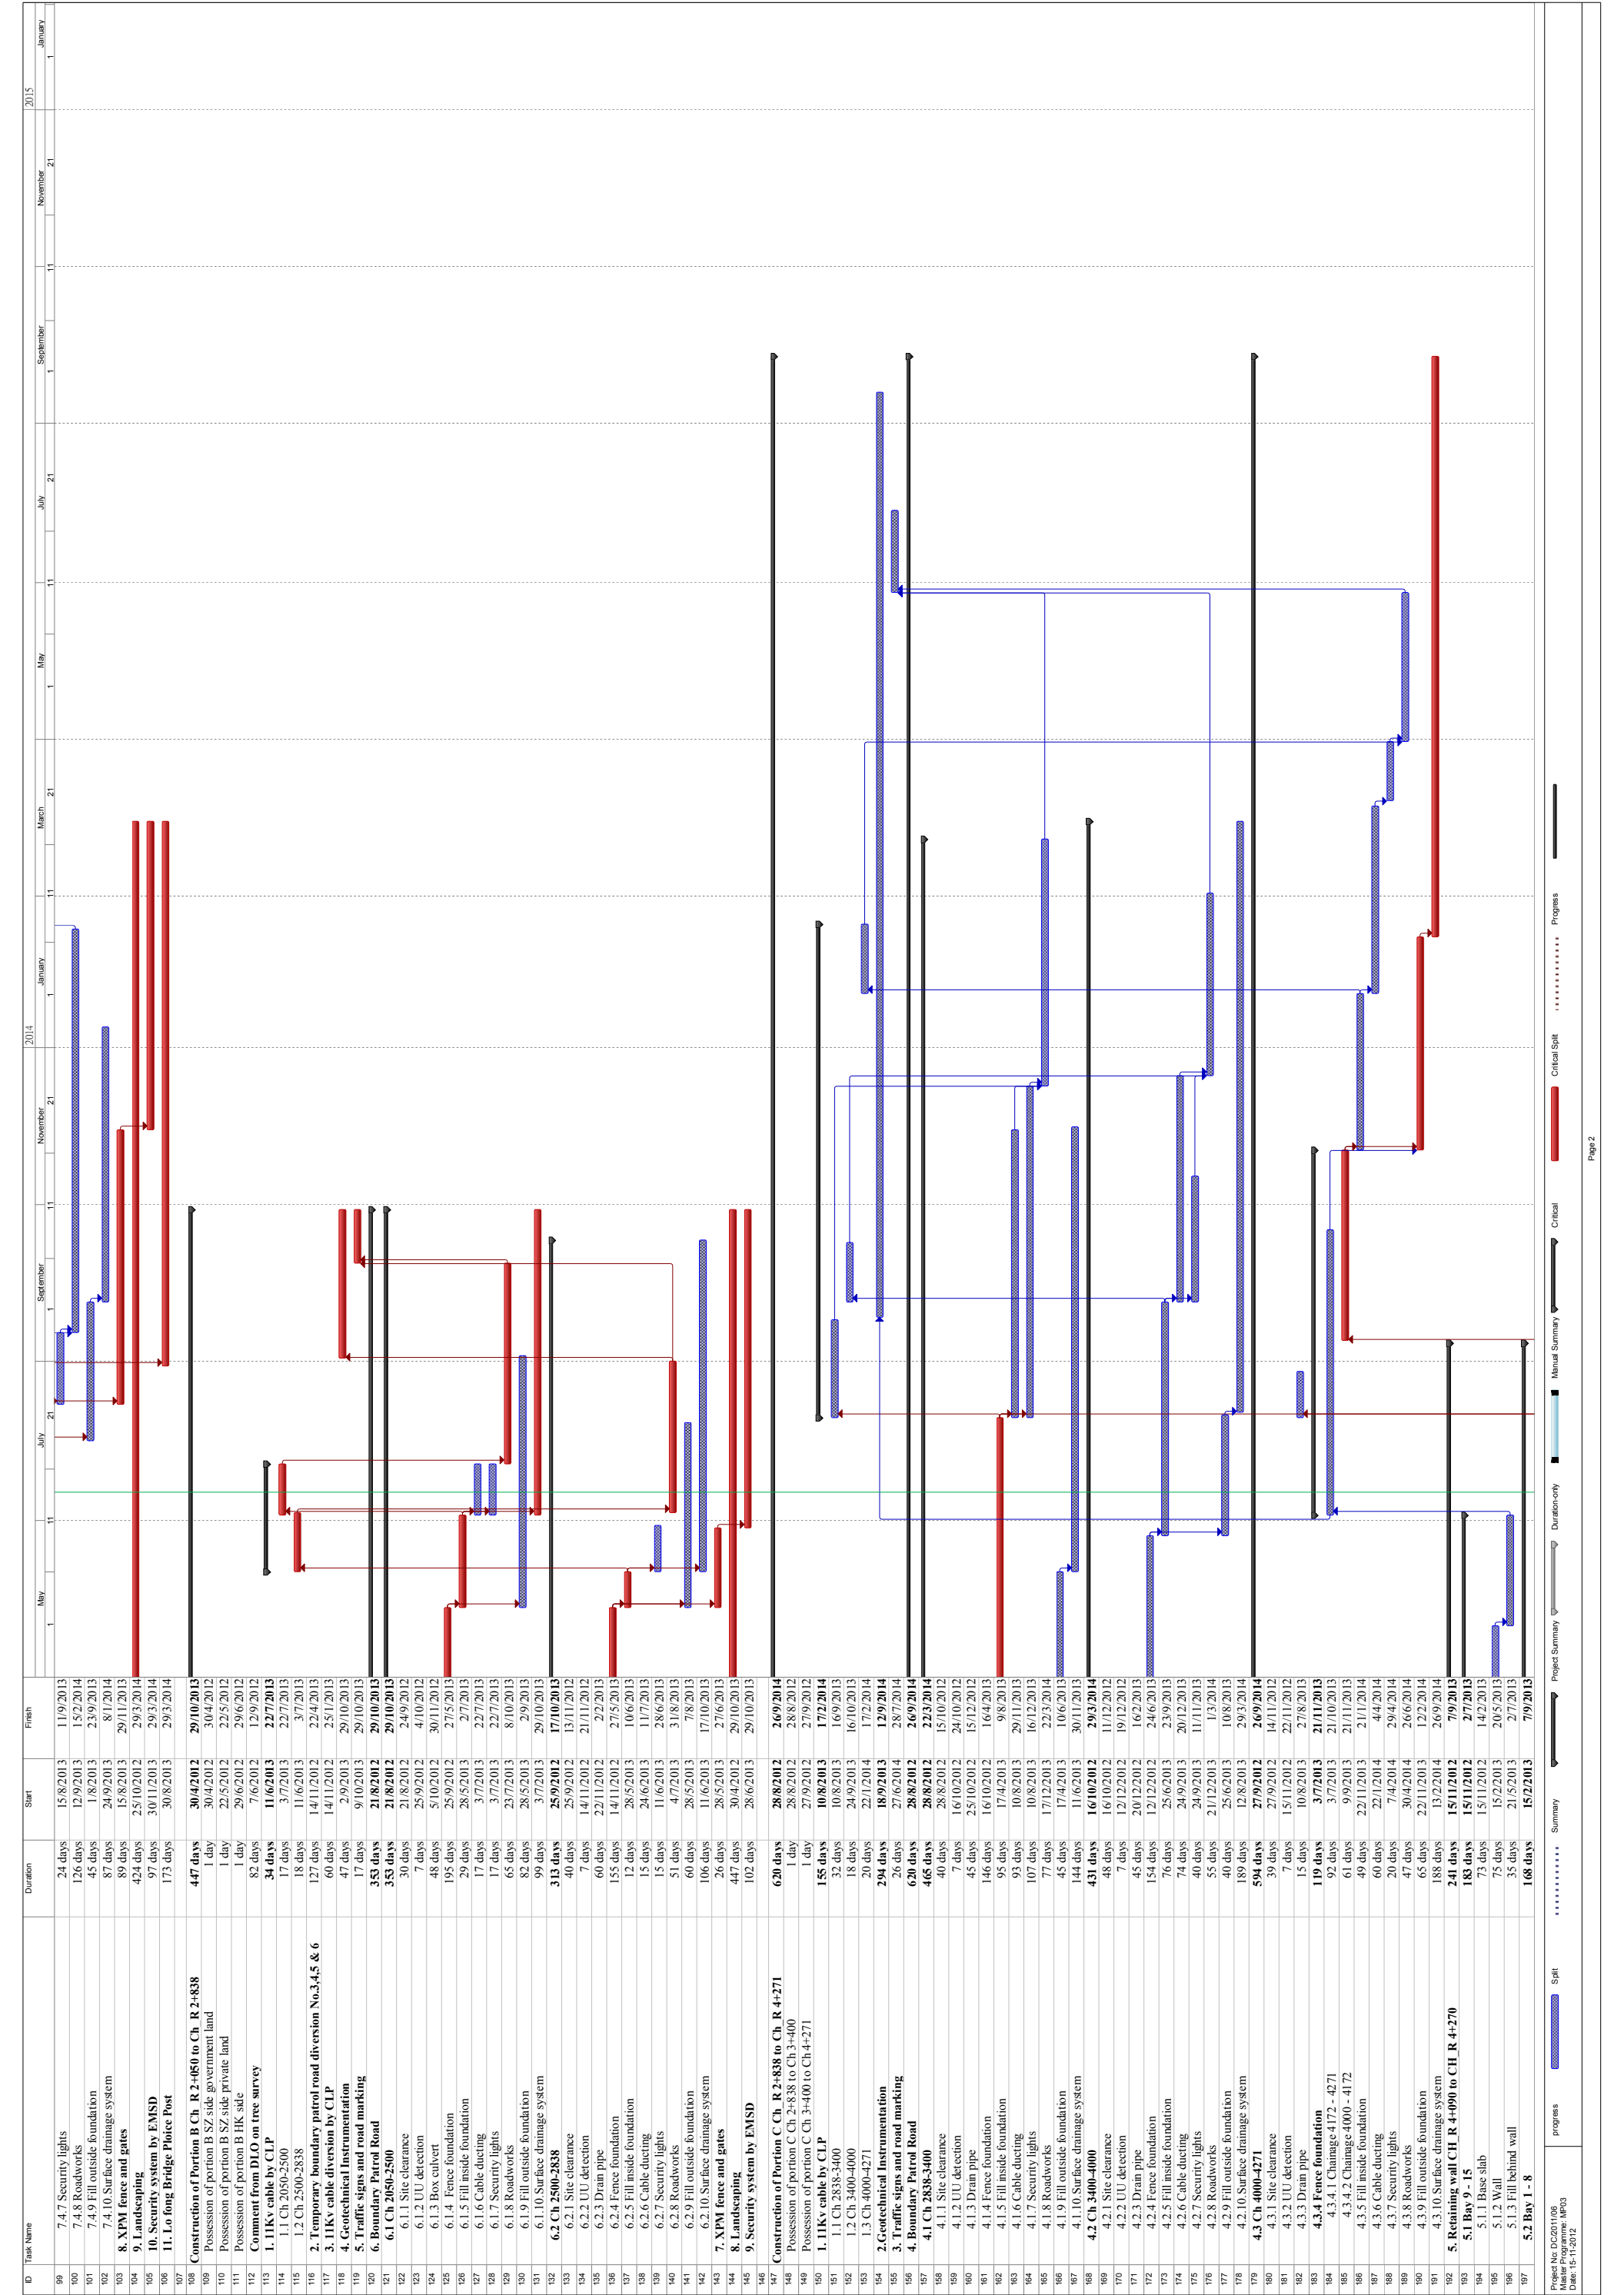

ID	Task Name	Duration	Start	Finish	2013	2014	2015
					Jan	Feb	Mar
198	5.2.1 Base slab	63 days	15/2/2013	4/5/2013			
199	5.2.2 Wall	80 days	6/5/2013	9/8/2013			
200	5.3.3 Fill behind wall	25 days	10/8/2013	7/9/2013			
201	6. XPM fence and gates	236 days	10/8/2012	26/5/2014			
202	7. Landscaping	606 days	13/9/2012	26/9/2014			
203	8. Security system by EMSD	103 days	27/5/2014	26/9/2014			
204							
205	Construction of Portion D	294 days	31/3/2012	28/3/2013			
206	Possession of Site	1 day	31/3/2012	31/3/2012			
207	Settling out and site clearance	24 days	31/3/2012	4/5/2012			
208	Traffic diversion	45 days	2/4/2012	30/5/2012			
209	Box culvert	155 days	31/5/2012	31/12/2012			
210	Reinstate existing road	6 days	26/7/2012	1/8/2012			
211	Rectangular Channel	213 days	5/5/2012	1/11/2013			
212	Protect existing structure near CH 54	120 days	2/4/2012	28/8/2012			
213	Inlet apron	32 days	18/1/2013	27/2/2013			
214	Reinstate existing structure	45 days	4/12/2012	28/1/2013			
215	Type 2 railing	25 days	28/2/2013	28/3/2013			
216							
217	Construction of Portion E	323 days	31/3/2012	7/5/2013			
218	Possession of Site	1 day	31/3/2012	31/3/2012			
219	Site clearance	30 days	31/3/2012	11/5/2012			
220	Settling out	15 days	12/5/2012	29/5/2012			
221	Utilities detection	7 days	30/5/2012	6/6/2012			
222	Utility Diversion	20 days	14/9/2012	9/10/2012			
223	Liaison with villagers	45 days	30/5/2012	23/7/2012			
224	Reprovisioning of existing boundary fence for private lots	30 days	24/7/2012	2/8/2012			
225	Landscaping Works	271 days	30/5/2012	27/4/2013			
226	1. Tree Survey	30 days	30/5/2012	5/7/2012			
227	2. Tree felling	60 days	6/7/2012	13/9/2012			
228	3. Transplant	90 days	6/7/2012	20/10/2012			
229	4. Compensatory planting	89 days	7/11/2012	27/4/2013			
230	Transition Section	226 days	6/7/2012	10/4/2013			
231	Gabon Wall Channel	162 days	14/9/2012	5/4/2013			
232	Box Culvert	172 days	14/9/2012	1/4/2013			
233	Vehicular Crossings	92 days	14/9/2012	5/1/2013			
234	Pedestrian Crossings	52 days	7/11/2012	11/3/2013			
235	Parapet	34 days	12/3/2013	24/4/2013			
236	Type 2 railing	16 days	18/4/2013	7/5/2013			



**ANNEX E**

**MONTHLY SUMMARY WASTE FLOW TABLE  
AND  
SUMMARY TABLE FOR WORK PROCESSES  
OR  
ACTIVITIES REQUIRING TIMBER FOR TEMPORARY WORKS**

**Monthly Summary Waste Flow Table**

Name of Department: DSD

Contract No.: DC/2011/06

**Monthly Summary Waste Flow Table for 2013**

Month	Actual Quantities of Inert C&D Materials Generated Monthly								Actual Quantities of Non C&D Wastes Generated Monthly				
	Total Quantity Generated (in '000m <sup>3</sup> )	Hard Rock and Large Broken Concrete (in '000m <sup>3</sup> )	Reused in the Contract (in '000m <sup>3</sup> )	Reused in other Projects (in '000m <sup>3</sup> )	Disposed as Public Fill (in '000m <sup>3</sup> )	Imported Fill (in '000m <sup>3</sup> )	Metals (in '000kg)	Paper/ cardboard packaging (in '000kg)	Plastics (see Note 3) (in '000kg)	Chemical Waste (in '000kg)	Others, e.g. general refuse (in '000m <sup>3</sup> )		
Jan-13	0.002	0.000	0.002	0.000	0.000	0.000	0.000	0.000	0.000	0.035			
Feb-13	0.001	0.000	0.001	0.000	0.000	0.000	0.000	0.000	0.000	0.015			
Mar-13	0.003	0.000	0.003	0.000	0.000	0.000	0.000	0.000	0.000	0.041			
Apr-13	0.003	0.000	0.003	0.000	0.000	0.000	0.000	0.000	0.020	0.041			
May-13	0.002	0.000	0.002	0.000	0.000	0.000	0.000	0.000	0.000	0.035			
Jun-13	0.002	0.000	0.002	0.000	0.000	0.000	0.000	0.000	0.000	0.037			
Jul-13	0.003	0.000	0.003	0.000	0.000	0.000	0.000	0.000	0.000	0.036			
Aug-13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.016	0.000			
Sep-13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000			
Oct-13	0.004	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.003			
Nov-13	0.012	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.025	0.012			
Dec-13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000			
<b>Total</b>	<b>0.040</b>	<b>0.000</b>	<b>0.040</b>	<b>0.000</b>	<b>0.000</b>	<b>0.000</b>	<b>0.000</b>	<b>0.000</b>	<b>0.061</b>	<b>0.564</b>			

Notes :

- (1) Note Used.
- (2) The waste flow table shall also include C&D materials that are specified in the Contract to be imported for use at the Sites.
- (3) Plastics refer to plastic bottles/containers, plastic sheets/foam from packaging materials.
- (4) The summary table shall be submitted to the Engineer's Representative monthly together with the Waste Flow Table for review and monitoring.

## Summary Table for Work Processes or Activities Requiring Timber for Temporary Works

**Contract No.:** DC/2011/06

**Contract Title:** *Reprovisioning of Boundary Patrol Road and Associated Security Facilities between Ping Yuen River and Pak Fu Shan and Drainage Works in North District*

**Report Period:** Dec-13

Item No	Description of Works Process or Activity [see note (a) below]	Justifications for Using Timber in Temporary Construction Works	Est. Quantities of Timber Used (m <sup>3</sup> )	Actual Quantities used (m <sup>3</sup> )	Remarks
1	Transition formwork & falsework (Portion A,B,E)	Temporary formwork & falsework design	10	9	
2	Transition formwork & falsework (Portion A,B,C)	Temporary formwork & falsework design	25	18	
3	Transition formwork & falsework (Portion A,B,C,E)	Temporary formwork & falsework design	52	40	
4	Transition formwork & falsework (Portion A,B,C,E)	Temporary formwork & falsework design	77	72	
5	Transition formwork & falsework (Portion A,B,C,E)	Temporary formwork & falsework design	102	86	
6	Transition formwork & falsework (Portion A,B,C,E)	Temporary formwork & falsework design	115	103	
7	Transition formwork & falsework (Portion A,B,C,E)	Temporary formwork & falsework design	121	112	
8	Transition formwork & falsework (Portion A,B,C,E)	Temporary formwork & falsework design	145	139	

Notes

(a) The Contractor shall list out all the work items requiring timber for use in temporary construction works. Several minor work items may be grouped into one for ease of updating.

(b) The summary table shall be submitted to the Engineer's Representative monthly together with the Waste Flow Table for review and monitoring.

## Summary Table for Work Processes or Activities Requiring Timber for Temporary Works

Contract No.: DC/2011/06

Contract Title: *Reprovisioning of Boundary Patrol Road and Associated Security Facilities between Ping Yuen River and Pak Fu Shan and Drainage Works in North District*

Report Period: Dec-13

Item No	Description of Works Process or Activity [see note (a) below]	Justifications for Using Timber in Temporary Construction Works	Est. Quantities of Timber Used (m <sup>3</sup> )	Actual Quantities used (m <sup>3</sup> )	Remarks
9	Transition formwork & falsework (Portion A,B,C,E)	Temporary formwork & falsework design	154	151	
10	Transition formwork & falsework (Portion A,B,C,E)	Temporary formwork & falsework design	156	155	
11	Transition formwork & falsework (Portion A,B,C,E)	Temporary formwork & falsework design	157	156	
12	Transition formwork & falsework (Portion A,B,C,E)	Temporary formwork & falsework design	160	157	
13	Transition formwork & falsework (Portion A,B,C,E)	Temporary formwork & falsework design	160	157	
14	Transition formwork & falsework (Portion A,B,C,E)	Temporary formwork & falsework design	171	166	
15	Transition formwork & falsework (Portion A,B,C,E)	Temporary formwork & falsework design	178	173	
16	Transition formwork & falsework (Portion A,B,C,E)	Temporary formwork & falsework design	191	186	
17	Transition formwork & falsework (Portion A,B,C,E)	Temporary formwork & falsework design	200	194	
<b>Total Estimated Quantity of Timber Used</b>			2174		

Notes

- (a) The Contractor shall list out all the work items requiring timber for use in temporary construction works. Several minor work items may be grouped into one for ease of updating.
- (b) The summary table shall be submitted to the Engineer's Representative monthly together with the Waste Flow Table for review and monitoring