



Maeda Corporation

MONTHLY REPORT (JUNE 2017)

MTRCL Contract C3840-13C

Tsim Sha Tsui Station Carnarvon Road Subway and Entrances Modification Works



AECOM 8/F. Grand Central Piaza, Tower 2, +852 2317 7609 fax 138 Shatin Rural Committee Road, Shatin, Hong Kong 香港新界沙田鄉事會路 138 號新城 市中央廣場第2座8樓 www.aecom.com

+852 3922 9000 tel

Your Ref: Our Ref: 60453136.40032976/2017000258E

By Email and Post

MTR Corporation Limited Fo Tan Railway House No. 9, Lok King Street, Fo Tan Shatin, N.T., Hong Kong

Attn.: Mr. Kenneth Chow / Environmental Engineer II

10 July 2017

Dear Sirs

Consultancy Agreement A130-13 Independent Environmental Checker for CRS and LTS CRS - Verification for 40th Monthly Environmental Monitoring and Audit (EM&A) Report (June 2017) (Report No.: EB001340R0553)

We refer to the 40th Monthly EM&A Report (June 2017) received under cover of the email from the Environmental Team, Arcadis Design & Engineering Limited, dated on 6 July 2017.

Further to our comments provided on 10 July 2017 and subsequent revision of the Report by Arcadis Design & Engineering Limited on 10 July 2017, we have no further comment and have verified the captioned report (Report No.: EB001340R0553).

Should you have any queries, please feel free to contact the undersigned at 3922 9366.

Yours faithfully **AECOM Consulting Services Ltd**

Y. W. Fung Independent Environmental Checker

LLMC/wwsc

via email (Attn.: Mr. F. N. Wong) Arcadis Design & Engineering Limited CC via email (Attn.: Ms. Cecilia Lee) Maeda Corporation





Maeda Corporation

Monthly EM&A Report (JUNE 2017)

MTRCL Contract C3840-13C

Tsim Sha Tsui Station Carnarvon Road Subway and Entrances Modification Works

		\bigcirc
Author	Tung Chi Sun	an
Checker	Wong Fu Nam	012-0
Proof Reader	Kelvin Au	IP
Approver	John Berry	John D Beng
		V

Report No EB00

EB001340R0553

CONTENTS

EXEC	CUTIVI	E SUMMARY	2
1	INTR	ODUCTION	3
	1.1	The Reporting Period	3
	1.2	Project Background	3
	1.3	Environmental Status	4
	1.4	Construction Activities	4
2	EM&	A REQUIREMENTS	5
	2.1	Air Quality	5
	2.2	Construction Noise	8
3	MON	ITORING RESULTS	11
	3.1	Air Quality	11
	3.2	Construction Noise	11
	3.3	Conclusions and Recommendations	12
4	ENVI	RONMENTAL AUDIT	13
	4.1	Site Inspection	13
	4.2	Compliance with Legal/Contractual Requirement	14
	4.3	Environmental Complaints	14
	4.4	Notification of Summons/Successful Prosecutions	14
5	CON	STRUCTION WASTE	15
	5.1	Waste Management	15
	5.2	Waste Management Status and Record	15
6	FUTU	JRE ENVIRONMENTAL ISSUES	15
	6.1	Key Environmental Issues	
	6.2	Mitigation Measures	15
7	CON	CLUSIONS AND RECOMMENDATIONS	16
	7.1	Conclusions	16
	7.2	Recommendations	16

APPENDICES

Appendix A Site Location Plan

Appendix B Management Structure

Appendix C Construction Programme

Appendix D Implementation Schedule

Appendix E Status of Environmental Licenses and Permits

Appendix F Event and Action Plan

Appendix G Monitoring Schedule

Appendix H Weather Information Extracted from HK Observatory

Appendix I Certificate of Laboratory and Equipment Calibration

Appendix J Sample Data Record Sheet

Appendix K Monitoring Results and Plots

Appendix L Flow Chart for Handling Environmental Complaints

Appendix M Waste Management Record

EXECUTIVE SUMMARY

Breaches of Action and Limit Levels

- ES01 No Notice of Exceedance. The environmental monitoring results registered no breaches of Action and Limit Levels of air quality and construction noise during the Reporting Period, therefore, associated investigation and follow-up actions were not required.
- ES02 No major corrective actions were taken as the environmental audit during the Reporting Period observed:
 - 1) No deficiencies with major environmental significance of the required environmental mitigation measures;
 - 2) No non-compliance with the required waste management; and
 - 3) No adverse environmental impacts on the sensitive receivers environed with the site of the Project.

Environmental Complaints

ES03 No environmental complaints were recorded during the Report Period.

Notification of Summons & Successful Prosecutions

ES04 No notification of summons and successful prosecutions were recorded during the Reporting Period.

Reporting Changes

ES05 No major reporting changes were made during the Reporting Period.

Future Key Issues

General

ES06 Construction noise, air quality and water quality are continued to be the key issues for the coming construction period. In order to alleviate potential adverse environmental impacts generated from construction activities to acceptable levels, environmental mitigation measures recommended in the EM&A Plan and summarised in the Implementation Schedule should be fully implemented and improved whenever appropriate.

Construction Noise

ES07 Particular attention should be paid to construction noise mitigation measures to ensure full compliance with statutory and non-statutory requirements and guidelines. Proactive review of working methods, careful selection and arrangement of the noisy equipment as well as effective noise mitigation measures are strongly recommended.

Water Quality

ES08 In addition, compliance with water quality mitigation measures remains one of the key environmental issues within the construction period, especially when water usage is high.

Air quality

ES09 Furthermore, implementation of necessary construction dust suppression measures is recommended during dusty activities under dry and windy conditions.

1 INTRODUCTION

1.1 The Reporting Period

- 1.1.1 This is the 40th monthly EM&A report (hereinafter referred as 'This Report') covering construction period from 1 to 30 June 2017 (hereinafter referred as 'the Reporting Period').
- 1.1.2 This Report has been written in accordance with the *Environmental Monitoring and Audit Plan* (hereinafter referred as 'the EM&A Plan') enclosed in the *Project Profile – MTR Tsim Sha Tsui Station Carnarvon Road Subway and Entrances Modification Works*, which is registered in the Environmental Permit No. EP-440/2012 (hereinafter referred as 'the EP') (Register No.: PP-462/2012).

1.2 Project Background

- 1.2.1 In order to improve the appearance of Carnarvon Road Entrance D1 and D2 of Tsim Sha Tsui (hereafter referred as 'TST') Station and to provide a more comfortable walking environment nearby, MTR Corporation Limited (hereafter referred as 'MTRC' or 'the Corporation') has commissioned Meada Corporation (hereinafter referred as 'MC') the contract MTR Tsim Sha Tsui Station Carnarvon Road Subway and Entrances Modification Works (hereafter referred as 'the Project'). The Project is proposed to rebuild the existing Entrance D1 and D2 and construct a new Entrance D3 at the basement B2 level of the K11 Art Mall to connect to the TST station by a subway, which extends from the Entrance D1 and D2 and runs approximately 80m along Carnarvon Road and across the Bristol Avenue to the Entrance D3. The Project was commenced in March 2014 and is anticipated to be completed in 2017.
- 1.2.2 The existing TST Station had been in operation before the *Environmental Impact Assessment Ordinance* (hereafter referred as 'EIAO') comes into effect on 1 April 1998. It constitutes an exempted Designated Project (hereinafter referred as 'DP') according to Section 9(2) (g) of the EIAO (Cap. 499). As the Project involves a material change to an exempted DP which may have potential environmental impacts, an environmental permit is required prior to the commencement of the modification works. The Project Profile has been developed to provide information for direct application of an environmental permit. The EP has been granted since 18 July 2012, after the Project Profile and the associated *EM&A Plan* were registered.
- 1.2.3 Site map, works area and locations of the environmental monitoring under the Project are illustrated in Figure 1.1 Site Location Plan of *Appendix A*.
- 1.2.4 Management structure of the Project, including organization chart, lines of communication and contact names and telephone numbers of key personnel, is demonstrated in *Appendix* **B**.
- 1.2.5 Construction programme is shown in *Appendix C*, whereas implementation schedule for the recommended environmental mitigation measures (hereinafter referred as 'the Implementation Schedule') are summarised in *Appendix D*, which fine tunes the construction activities and shows inter-relationships with the environmental protection/ mitigation measures for the construction period. It is being reviewed and will be updated soon upon availability of more solid information.

1.3 Environmental Status

- 1.3.1 As required in the EP, AECOM Consulting Services Limited has been appointed as the Independent Environmental Checker under the Project (hereinafter referred as 'the IEC'), whereas Arcadis Design and Engineering Limited (formerly known as Hyder Consulting Limited) has been appointed as the Environmental Team under the Project (hereinafter referred as 'the ET').
- 1.3.2 According to the EP Condition 3.2 (a) under Environmental Monitoring and Audit (EM&A) during the Construction Period, baseline monitoring has been completed and the required Baseline Monitoring Report has been submitted to EPD on 14 February 2014 prior to commencement of the works under the Project.
- 1.3.3 Status of relevant environmental permits, licences, and/or notifications on environmental protection for the Project is summarised in *Table 1-3-1* below. They are detailed in *Appendix E*.

ltem	Description	License/Permit Status
1	Air Pollution Control	Notification Ref. 403252 acknowledged on 02 Jun 2016
	(Construction Dust)	
2	Water Pollution Control	The discharge license (Ref No. WT00019722-2014) was
	Ordinance (Discharge	granted on 01 Sep 2014 superseding the previous license (Ref
	License)	No. WT00018229-2014).
3	Billing Account for Disposal	A/C Ref. 7018523 granted on 25 Oct 2013
	of Construction Waste	
4	Chemical Waste Producer	Registration Ref. 5213-2214-M2446-16 granted on 4 Mar 2014
	Registration	
5	Construction Noise Permit	CNP No. GW-RE0064-17 approved on 6 February 2017 for
		operation of 4 submersible water pumps (electric) from 15
		February to 14 August 2017

Table 1-3-1 Summary of Status of Environmental Licenses and Permits

1.4 Construction Activities

1.4.1 Construction activities undertaken during the Reporting Period and the following month are summarised in *Table 1-4-1*:

Table 1-4-1 Construction Activities

Item	Description		
	Construction Activities Undertaken during the Reporting Period		
1	Excavation of the mined tunnel		
2	Portal frame and steel rib installation for the mined tunnel		
3	Installation of strut and waling for C&C tunnel		
4	Construction of vertical blinding		
5	Excavation of C&C tunnel		
6	Construction of C&C tunnel		
	Construction Activities to be Undertaken in the Up-Coming Month		
1	Construction of the mined tunnel		
2	Installation of strut and waling for C&C tunnel		
3	Construction of vertical blinding		
4	Excavation of C&C tunnel		
5	Construction of C&C tunnel		

2 EM&A REQUIREMENTS

2.1 Air Quality

Monitoring Parameters and Frequency

- 2.1.1 24-Hour Total Suspended Particulates (hereinafter referred as '24-Hr TSP') is required to be monitored once a week during construction period of the Project.
- 2.1.2 1-Hour Total Suspended Particulates (hereinafter referred as '1-Hr TSP') is required to be monitored when exceedances of 24-Hr TSP occur, following the Event and Action Plan presented in *Appendix F*.
- 2.1.3 Schedules for 24-Hr TSP monitoring for the Reporting Period and the next month were prepared and submitted to MTRC, IEC and MC prior to implementation via e-mail and / or facsimile for ease of necessary inspection. If amendment is necessary under ad hoc conditions, including actual and broadcast adverse weather, accidental instrument failures, etc., notification will be given at least 24 hours prior to implementation or as practical as possible. The monitoring schedules are enclosed in *Appendix G*.

Monitoring Location

- 2.1.4 According to the EM&A Plan, Mirador Mansion was designated to be the air quality monitoring station of the Project. As the access to the air monitoring location designated in the EM&A Plan has been denied by the owner of the property, the ET proposes an alternative monitoring location on the roof-top above the 4/F of the commercial complex of K11 (hereinafter referred as 'K11'), which has been agreed among MTRC, IEC and MC, and the associated access to K11 has been granted by the management office of K11 prior to the commencement of the baseline monitoring in January 2014.
- 2.1.5 Air quality monitoring location is summarised in *Table 2-1-1* below and illustrated in *Appendix A*.

Table 2-1-1 Air Quality Monitoring Location

Location ID	Name of Premises	Description
K11	K11 Art Mall	Rooftop, 4/F

Monitoring Equipment

2.1.6 The air quality monitoring equipment to be used for construction air impact monitoring is shown in *Table 2-1-2* below:

Table 2-1-2 Air Quality Monitoring Equipment

Equipment Type	Model	Serial Number	Calibration Orifice Number
High Volume Air Sampler	TE5170 MFC	0462	1785
Sibata Digital Dust Monitor	LD-3B	296098	Not Applicable

2.1.7 Weather information including wind speeds and wind directions is obtained from King's Park Weather Station. The weather information is used as weather conditions during the Reporting Period. They are presented in *Appendix H*.

Calibration of Monitoring Equipment

2.1.8 The HVAS is calibrated before commencement of monitoring using standard orifice 5points calibration method with orifice calibrator to determine the actual flow rate of each HVAS. A calibration Kit (Model - TE5025A) is used for calibration of the HVAS. At least

- 2.1.9 Once every 12 months, recalibration of the calibration kit is carried out during its maintenance.
- 2.1.10 Calibration of the HVAS is conducted following the manufacturer's instruction manual. Initial calibration of the equipment is conducted upon installation and thereafter at bimonthly intervals throughout the period of impact monitoring. The transfer standard should be traceable to the internationally recognised primary standard and be calibrated annually.
- 2.1.11 The Sibata Digital Dust Monitor LD-3B for 1-hour TSP monitoring is calibrated annually and the calibration certificates of the equipment are shown in *Appendix I*.

Monitoring Methodology – 24-Hr TSP

2.1.12 Air quality monitoring (24-Hr TSP) will be conducted once a week under typical weather conditions (with no adverse weather such as typhoon signal or rain storm warning).

Installation of HVAS

- 2.1.13 When positioning the HVAS, the following points will be noted:
 - a) A horizontal platform with appropriate support to secure the samplers against gusty wind will be provided;
 - b) No two samplers will be placed less than 2 m apart;
 - c) The distance between the sampler and an obstacle, such as buildings, must be at least twice the height that the obstacle protrudes above the sampler where possible;
 - d) A minimum of 2 m of separation from walls, parapets and penthouses is required for rooftops samplers;
 - e) A minimum of 2 m of separation from any supporting structure, measured horizontally is required;
 - f) No furnace or incinerator flue or building vent is nearby;
 - g) Airflow around the sampler is unrestricted;
 - h) The sampler is more than 20 m from the drip line;
 - i) Any wire fence and gate, to protect the sampler, should not cause any obstruction during monitoring;
 - j) Permission must be obtained to set up the samplers and to obtain access to the monitoring stations; and
 - k) A secured supply of electricity is needed to operate the samplers.

Preparation of Filter Papers and Laboratory Analysis

- 2.1.14 Sufficient pieces of filter paper should be labelled before sampling. It should be a clean filter paper with no pinholes, and should be conditioned in a humidity-controlled chamber for over 24-hour and be pre-weighed before use for the sampling. The preferred room temperature is around 25 °C ±3 °C with relative humidity (hereinafter referred as 'the RH') less than 50% ± 5%, preferably 40%.
- 2.1.15 Preparation of filters and subsequent laboratory analysis of the collected 24-Hr TSP samples were performed by ALS Technetiem (HK) Pty Ltd (hereinafter referred as 'ALS'), a local laboratory which have been accredited under Hong Kong Laboratory Accreditation Scheme (HOKLAS).
- 2.1.16 All the collected samples should be kept by the ET in standard office conditions for 6 months before disposal.

Field Monitoring Procedures

- 2.1.17 Procedures for field monitoring are as follows:
 - a) Check power supply to ensure the HVAS works properly.
 - b) Clean the filter holder and the area surrounding the filter.
 - c) Remove the filter holder by loosening the four bolts and carefully align a new filter, with stamped number upward, on a supporting screen.

- d) Align the filter properly on the screen so that the gasket forms an airtight seal on the outer edges of the filter.
- e) Fasten the swing bolts to hold the filter holder down to the frame. The pressure applied should be sufficient to avoid air leakage at the edges.
- f) Close the shelter lid and secure with the aluminium strip.
- g) Warmed-up the HVAS for about 5 minutes to establish run-temperature conditions.
- h) Set a new flow rate record sheet into the flow recorder.
- i) Checked and adjust the flow rate of the HVAS at around 1.1 m³ per minute. (The range specified in the EM&A Plan is between 0.6-1.7 m³ per minute.)
- j) Set the programmable timer for a sampling period of 24 hours, and record the starting time, weather condition and the filter number.
- k) Record the initial elapsed time.
- I) At the end of sampling, remove the sampled filter carefully and fold it in half-length so that only surfaces with collected particulate matter are in contact.
- m) Place the sampled filter in a clean plastic envelope and seal.
- n) Record all monitoring information on a Field Data Sheet as shown in Appendix J.
- o) Send the filters to ALS for analysis.

Monitoring Methodology – 1-Hr TSP

Field Monitoring

- 2.1.18 The procedures for measurement of 1-Hr TSP follow Manufacturer's Instruction Manual, which is summarised as follows:
 - a) Turn on the power.
 - b) Close the air collecting opening cover.
 - c) Set the "TIME SETTING" switch to [BG].
 - d) Press "START/STOP" switch to perform background measurement.
 - e) Turn the knob at SENSI ADJ position.
 - f) Leave the equipment upon "SPAN CHECK" is indicated in the display.
 - g) Press "START/STOP" switch to perform automatic sensitivity adjustment.
 - h) Turn the knob at MEASURE position.
 - i) Set time period of 1 hour for the 1-hour TSP measurement.
 - j) Press "START/STOP" to start the 1-hour TSP measurement.
 - k) Check the time period to ensure monitoring time of 1 hour.
 - I) Record all monitoring information on a Field Data Sheet.

Maintenance and Calibration

- 2.1.19 The procedures for maintenance and calibration of 1-Hr TSP follow Manufacturer's Instruction Manual as follows:
 - a) The Sibata is checked at 3-month intervals and calibrated at 1-year intervals throughout the whole construction period.
 - b) Calibration records for the Sibata Digital Dust Monitor direct dust meters are shown in *Appendix I*.

Action and Limit Levels

2.1.20 The Action and Limit levels (hereinafter referred as 'the A/L Levels) at K11 have been established in the Baseline Monitoring Report in accordance with the derivation criteria specified in Section 3.7 of the EM&A Plan, which are summarised in *Table 2-1-3* as follows:

Table 2-1-5 Derivation of Action and Limit Levels for Air Quanty at KT1, µg/m		
Parameter	Action Level	Limit Level
24-Hr TSP	For baseline level ≤200 µg/m³, Action level = (130% of baseline level + Limit level)/2	260
1-Hr TSP	For baseline level ≤384 µg/m³, Action level = (130% of baseline level + Limit level)/2 For baseline level >384 µg/m³, Action level = Limit level	500

Table 2-1-3 Derivation of Action and Limit Levels for Air Quality at K11, µg/m³

2.1.21 The established A/L Levels for 24-Hr and 1-Hr TSP are summarised in *Table 2-1-4* as follows:

Parameter	Action Level	Limit Level
24-Hr TSP	221.6	260
1-Hr TSP	373	500

Event and Action Plan

2.1.22 In case exceedances of Action and/or Limit levels for air quality occur, Event and Action Plan for Air Quality enclosed in *Appendix F* will be implemented.

Environmental Mitigation Measures for Air Quality

- 2.1.23 Although most of the construction works would be carried out underground, appropriate dust mitigation measures as stipulated in the EP, Project Profile, related environmental regulation including Air Pollution Control (Construction Dust) Regulation as well as those recommended in the Implementation Schedule should be implemented to control fugitive dust emission. The following key dust suppression measures are recommended:
 - a) Decking over the excavation areas;
 - b) Regular watering to reduce dust emissions from all exposed site surface, particularly during dry weather;
 - c) Frequent watering for particularly dusty construction areas and areas close to air sensitive receivers;
 - d) Cover all excavated or stockpiles of dusty material by impervious sheeting or spraying with water to maintain the entire surface wet;
 - e) Provision of vehicle washing facilities at the exit points of the site; and
 - f) Provision of tarpaulin covering for any dusty materials on a vehicle leaving the site.
- 2.1.24 Details of the implementation schedule for the required environmental mitigation measures are presented in *Appendix D.*

2.2 Construction Noise

Monitoring Parameters and Frequency

2.2.1 **Table 2-2-1** summarizes the monitoring parameters and frequency for construction noise:

Table 2-2-1 Noise Monitoring Parameters and Frequency

Parameters	Frequency
L _{eq} in 30 minutes	Once a week

2.2.2 Monitoring schedules for construction noise for the Reporting Period and the next Reporting Period are prepared and submitted to MTRC, IEC and MC prior to implementation via e-mail and / or facsimile for ease of necessary inspection. Where amendment is necessary under ad hoc conditions, including actual and broadcast adverse weather, accidental instrument failures, etc., advanced notification is given at least 24 hours prior to implementation or as practical as possible.

Monitoring Equipment

2.2.3 With reference to the Technical Memorandum (TM) issued under the Noise Control Ordinance (NCO), sound level meters in compliance with the International Electrotechnical Commission Publications 651: 1979 (Type 1) and 804: 1985 (Type 1) specifications (both publications have been withdrawn and replaced by 61672:2003) are used for carrying out the noise monitoring. The details of the calibration of the sound level meters and their respective calibrators are as shown in the following **Table 2-2-2**:

Table 2-2-2 Construction Noise Monitoring Equipment

Item	Equipment Name	Model
1	Sound Level Meter	B&K 2238 (Serial No. 2562782)
2	Acoustic Calibrator	CAL 200 (Serial No. 10929)

Monitoring Location

- 2.2.4 As stated in previous **Section 2.1.4**, the alternative air quality monitoring location K11 which is proposed by the ET and agreed among MTRC, IEC and MC, i.e. on the roof-top above the 4/F of the commercial complex of K11, is used for the construction noise monitoring location. The access to K11 has been granted by the management office of the K11 prior to the commencement of the baseline monitoring in January 2014.
- 2.2.5 **Table 2-2-3** summarizes the recommended alternative noise monitoring location, which is illustrated in **Appendix A**.

Table 2-2-3 Noise Monitoring Location

Location ID	Name of Premises	Description
K11	K11 Art Mall	Rooftop, 4/F

Monitoring Methodology

Field Monitoring

2.2.6 Procedures for noise monitoring summarised as follows:

- a) The microphones of the Sound Level Meter are about 1 m from the exterior of the building façade.
- b) The battery condition is checked to ensure the correct functioning of the meter.
- c) Parameters such as frequency weighting, the time weighting, the measurement time and monitoring frequency are set as follows:
 - i. Frequency weighting: A
 - ii. Time weighting: Fast
 - iii. Time measurement: 30 minutes' intervals (between 0700-1900 on normal weekdays)
 - iv. Monitoring frequency: one set of measurement on a weekly basis
- d) Prior to and after each noise measurement, the meter is calibrated using a Calibrator for 94 dB at 1 kHz. If the difference in the calibration level before and after measurement is more than 1 dB, the measurement should be considered invalid and the measurement repeated after re-calibration or repair of the equipment.
- e) During the monitoring period, the $L_{eq}(30 \text{ min})$ are recorded.
- f) Record all monitoring information on a Field Data Sheet as shown in *Appendix J*.
- g) Maintenance and Calibration.

h) The meter and calibrator are sent to the supplier or HOKLAS laboratory to check and calibrate prior to the monitoring. Calibration records are presented in *Appendix I*.

Weather Condition

2.2.7 The wind speeds and directions during the monitoring period are recorded and shown in *Appendix H.*

Action and Limit Levels

2.2.8 The Action and Limit levels (hereinafter referred as 'the A/L Levels) at K11 have been established in the Baseline Monitoring Report. They are summarised in *Table 2-2-4* as follows:

Table 2-2-4 Action and Limit Levels for Construction Noise

Time Period	Action Level	Limit Level
0700-1900 hours on normal	When one valid documented	75*
weekdays	complaint is received.	75*

Note: If works are to be carried out during restricted hours, the conditions stipulated in the Construction Noise Permit (CNP) issued by the Noise Control Authority have to be followed.

Event and Action Plan

2.2.9 In case exceedances of Action and/or Limit levels for construction noise occur, the Event and Action Plan enclosed in *Appendix F* will be triggered.

Mitigation Measures for Construction Noise

- 2.2.10 Although no residual noise impact would be generated after the proposed mitigation measures are in place, the general construction noise control measures stipulated in the EP, Project Profile as well as those recommended in the Implementation Schedule should be fully implemented in order to minimise noise impacts during the construction phase. They are summarised as follows:
 - a) The Code of Practice on Good Management Practice to Prevent Violation of the Noise Control Ordinance (Chapter 400) (for Construction Industry) published by EPD shall be adopted;
 - b) The statutory and non-statutory requirements and guidelines shall be complied with;
 - c) Approval for the method of working, equipment and noise mitigation measures intended to be used at the site shall be granted from the Project Engineer before commencing any work;
 - Working methods to minimize the noise impact on the surrounding NSRs shall be formulated and executed, and the implementation of these methods shall be monitored by experienced personnel with suitable training;
 - e) Noisy equipment and noisy activities shall be located as far away from the NSRs as is practical;
 - f) Unused equipment shall be turned off;
 - g) PME should be kept to a minimum and the parallel use of noisy equipment / machinery should be avoided;
 - h) All plant and equipment shall be maintained regularly; and
 - i) Material stockpiles and other structures shall be effectively utilised as noise barriers, whenever practicable.
- 2.2.11 Details of the implementation schedule for the mitigation measures are presented in *Appendix D*.

3 MONITORING RESULTS

3.1 Air Quality Monitoring Results

- 3.1.1 24-Hr TSP monitoring during the Reporting Period was conducted following the agreed monitoring schedule.
- 3.1.2 24-Hr TSP results of the Reporting Period are summarised in the following *Table 3-1-1*. Graphical plots of the parameter are illustrated in *Appendix K*.

Mean (Min – Max)	29.4 (21.6 - 42.4)		
26-Jun-17	25.8		
19-Jun-17	30.2	221.6	260
12-Jun-17	27.1		
5-Jun-17	21.6		
1-Jun-17	42.4		
Monitoring Date	24-Hr TSP	Action Level	Limit Level

Table 3-1-1 Summary of 24-Hr TSP Monitoring Results, µg/m³

Discussion

- 3.1.3 **Table 3-1-1** demonstrates that all 24-Hr TSP results of the Reporting Period fluctuated well below the A/L Levels of the parameter, i.e. neither Action Level nor Limit Level exceedances were recorded.
- 3.1.4 No Notice of Exceedances (thereinafter referred as 'NOE'). Therefore, the associated NOE Investigation as well as remedial actions were not required during the Reporting Period.

3.2 Construction Noise

Monitoring Results

- 3.2.1 Construction noise monitoring during the Reporting Period was conducted following the agreed monitoring schedule.
- 3.2.2 Construction noise monitoring results of the Reporting Period are summarised in the following **Table 3-2-1**. Graphical plots of the parameter are illustrated in **Appendix K**.

Table 3-2-1 Summary of Construction Noise Monitoring Results at K11, dB(A)

Monitoring Date	Leq (30 min)	Action Level	Limit Level
1-Jun-17	69.2	Any	
6-Jun-17	68.5	documented	
14-Jun-17	69.8	complaint	
22-Jun-17	69.1	against	75
27-Jun-17	7-Jun-17 69.7	construction	
Mean (Min – Max), <i>Leq</i> (30 min)	69.3 (68.5 – 69.7)	noise.	

Discussion

- 3.2.3 No environmental complaint against construction noise was registered during the Reporting Period, whereas **Table 3-2-1** demonstrates that all construction noise results of the Reporting Period were fell below the Limit Level of the parameter. Neither exceedances of Action Level nor exceedances of Limit Level were recorded.
- 3.2.4 Neither NOE nor NOE investigation and the associated remedial actions were required during the Reporting Period.
- 3.2.5 The Contractor's attention is drawn to certain noisy construction activities, which were scheduled to be conducted during the coming month as listed in **Table 1-4-1** under **Section 1.4:** Construction Activities Undertaken during the Reporting Period and Up-Coming Month.
- 3.2.6 Attention is drawn to adequate mitigation measures to be implemented during the noisy construction activities in order to alleviate noise nuisance generated from the Project related construction activities.

Weather Conditions

- 3.2.7 No weather conditions or any other factors were identified to have significant effects on the air and noise monitoring results within the Reporting Period.
- 3.2.8 Weather information during the Reporting Period which is extracted from Hong Kong Observatory King's Park Weather Station and enclosed for reference in *Appendix H*.

3.3 Conclusions and Recommendations

Conclusions

- 3.3.1 No exceedances of A/L Levels of air quality and construction noise were registered during the Reporting Period.
- 3.3.2 No NOE and the associated NOE Investigation and corrected actions were required during the Reporting Period.

Recommendations

- 3.3.3 Full implementation of the environmental mitigation measures, which are required in the EM&A Plan and summarised in Implementation Schedule of *Appendix D*, is recommended. Where necessary, proper maintenance and improvement of the implemented mitigation measures are reminded.
- 3.3.4 Construction dust shall be suppressed during dusty construction activities under dry and windy conditions.
- 3.3.5 In addition, construction noise shall be eliminated to avoid adverse impacts on the nearby sensitive receivers.

4 ENVIRONMENTAL AUDIT

4.1 Site Inspection

- 4.1.1 Weekly site inspections during the Reporting Period were conducted by MTRC, MC and ET, whereas the monthly site inspection of the Reporting Period was jointly conducted by the IEC, MTRC, MC and ET. The site inspection follows strictly to the agreed Site Inspection Checklist, which covers all the site audit requirements stipulated in the EM&A Plan, PS and all relevant environmental laws.
- 4.1.2 The completed Site Inspection Checklists are distributed to relevant parties upon completion of the site inspection for agreement and signature of the relevant parties and, where appropriate, for implementation of the recommended corrected actions to promptly rectify the situation.
- 4.1.3 The site inspections during the Reporting Period were conducted on 06, 13, 20 and 27 June 2017. A joint site inspection was conducted by IEC, MTRC, MC and ET on 27 June 2017.
- 4.1.4 As the Air Pollution Control (Non-road Mobile Machinery) (Emission) Regulation has been enforced since December 2015, particular attention was paid to check EPD's Non-Road Mobile Machinery (NRMM) labels demonstrated on the regulated NRMM, except those which application is in progress. Deficiencies or findings of the site audit and the associated follow up actions are summarised in the following **Table 4-1-1**:

Date	Deficiencies or findings	Follow-Up Action				
06 - June -2017	Follow-up item(s)					
	No follow-up item.	Not required.				
	Observation(s) on the day of inspection					
	No deficiency was observed on site.	Not required.				
13 - June -2017	Follow-up item(s)					
	No follow-up item.	Not required.				
	Observation(s) on the day of inspection					
	No deficiency was observed on site.	Not required.				
20 - June -2017	Follow-up item(s)					
	No follow-up item.	Not required.				
	Observation(s) on the day of inspection					
	No deficiency was observed on site.	Not required.				
27 - June -2017	Follow-up item(s)					
	No follow-up item.	Not required.				
	Observation(s) on the day of inspection					
	No deficiency was observed on site.	Not required.				

 Table 4-1-1
 Summary of Findings and Follow-Up Actions of the Site Inspection

4.1.1 As shown in *Table 4-1-1*, no major deficiencies or non-compliance of environmental mitigation measures or adverse environmental impacts were observed during the Reporting Period.

4.2 Compliance with Legal/Contractual Requirement

4.2.1 Construction activities under the Project must comply with all environmental protection and pollution control laws in Hong Kong, as well as the contractual requirements of the Project. **Table 4-2-1** summarizes breaches of legal and contractual requirements.

Table 4-2-1 Summary of Breaches of Legal and Contractual Requirements

Month	No. of Breach(s)	Cumulative no. from March 2014 to the Reporting Period
June 2017	0	0

4.3 Environmental Complaints

- 4.3.1 Environmental complaints are handled following closely the flow chart of complaint response procedure which is enclosed in *Appendix L*.
- 4.3.2 Environmental complaints registered during the Reporting Period are summarised in *Table 4-3-1* below:

Table 4-3-1 Summary of Complaint

Month	No. of Complaint(s)	Cumulative no. from March 2014 to the Reporting Period
June 2017	0	5

4.4 Notification of Summons/Successful Prosecutions

4.4.1 Notification of summons and successful prosecutions registered during the Reporting Period are summarised in *Table 4-4-1* below:

Table 4-4-1 Summary of Summon and Successful Prosecutions

Month	No. of Breach(s)	Cumulative no. from March 2014 to the Reporting Period
June 2017	0	0

5 **CONSTRUCTION WASTE**

5.1 Waste Management

5.1.1 Waste management under the Project is performed in accordance with the Waste Management Plan, which has been prepared for implementation of the construction waste mitigation measures in compliance with the requirements stipulated in the EM&A Plan, PS, Waste Disposal Ordinance and the associated subsidiary regulations.

5.2 Waste Management Status and Record

- 5.2.1 Updated waste management status is detailed in *Appendix M*, where the 3-R status of the construction waste generated from construction of the Project during the Reporting Period is presented.
- 5.2.2 Despite small scale of the Project and the amount of C&D material that needs to be hauled off site and disposed of is anticipated not to be significant, 3-R waste management i.e. Reduce, Reuse and Recycle, is adopted in order to minimize adverse environmental impacts to be generated from construction of the Project.

6 FUTURE ENVIRONMENTAL ISSUES

6.1 Key Environmental Issues

- 6.1.1 Future key environmental issues include:
 - 1) Air quality, in particular construction dust during dusty construction activities, e.g. excavation works under dry and windy conditions;
 - 2) Construction noise during noisy activities; and
 - 3) Site surface water run-off and construction wastewater discharge.

6.2 Mitigation Measures

- 6.2.1 To avoid potential adverse environmental impacts to be generated from future key environmental issues as stated above, full implementation of the mitigation measures as stipulated in the Implementation Schedule in *Appendix D* is required.
- 6.2.2 Mitigation measures for air quality, construction noise and water quality implemented to date shall be properly maintained.
- 6.2.3 Where appropriate, improvement of the implemented mitigation measures is reminded to ensure effectiveness of the mitigation measures.

7 CONCLUSIONS AND RECOMMENDATIONS


7.1 Conclusions

- 7.1.1 EM&A results during the Reporting Period showed that adverse environmental impacts generated from construction activities under the Project was alleviated to acceptable levels via implementation of the environmental mitigation measures recommended in the EM&A Plan and summarised in the Implementation Schedule.
- 7.1.2 Neither NOE & the associated NOE investigation nor follow-up actions were required as the environmental monitoring results registered no exceedances of A/L Levels of air quality and construction noise during the Reporting Period.
- 7.1.3 No corrective actions were required as the environmental audit during the Reporting Period observed:
 - 1) No deficiencies with major environmental significance of the required environmental mitigation measures;
 - 2) No non-compliance with the required waste management; and
 - No adverse environmental impacts on the sensitive receivers environed with the site of the Project.
- 7.1.4 In addition, no remedial actions were required as no notification of summons and successful prosecutions were reported during the Reporting Period.
- 7.1.5 Although inadequacies of proactive environmental mitigation measures were occasionally observed during the regular site inspection and audit, they were rectified in situ upon identification or notification or timely before the following site audit.

7.2 Recommendations


- 7.2.1 The existing environmental mitigation measures have been proven to be effective. They should be properly maintained.
- 7.2.2 Where appropriate, additional or improvement of the environmental mitigation measures should be implemented.
- 7.2.3 Particular attention should be paid to construction noise mitigation measures to ensure full compliance with statutory and non-statutory requirements and guidelines. Proactive review of working methods, careful selection and arrangement of the noisy equipment as well as effective noise mitigation measures are strongly recommended.
- 7.2.4 In addition, suppression of construction dust is reminded during dusty construction activities under dry and windy conditions.
- 7.2.5 Furthermore, monitoring of site water runoff is reminded to prevent any direct water discharge off site, especially when water usage is high during the construction period. When necessary, the Contractor is reminded to apply additional precautionary measures to prevent any possible environmental deficiency.

APPENDIX A SITE LOCATION PLAN

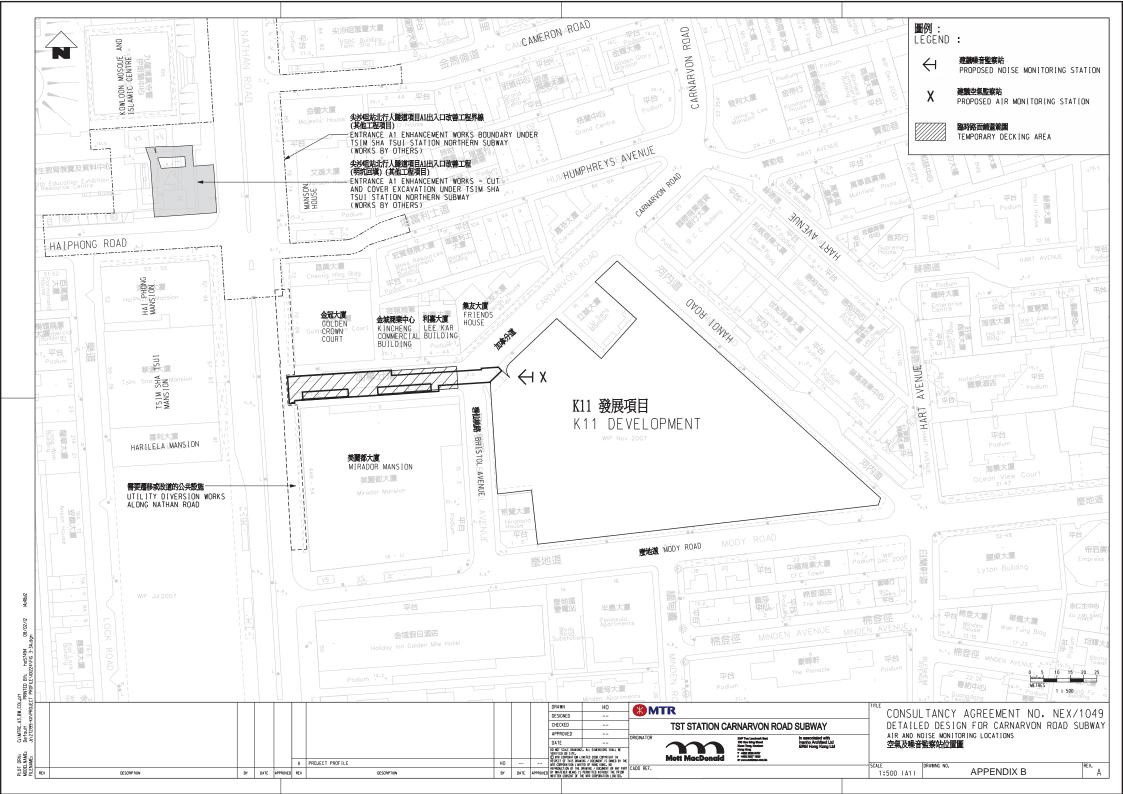

APPENDIX B

MANAGEMENT STRUCTURE

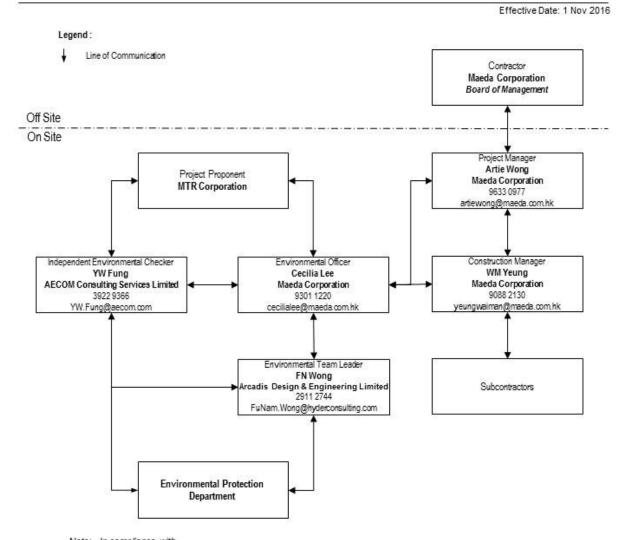

Project Organization Chart in Environmental Management (Rev.04)

Note: In compliance with

i) Clause.1.3 of Environmental Monitoring and Audit Manual (Appendix VII of Project Profile PP462/2012)

APPENDIX C

CONSTRUCTION PROGRAMME

	🔀 MTR				CONTRACT C3840-13C Tsim Sha Tsui Station, Carnarvon Road Subway										
	Activity Name	Orig Dur	Planned Start	Planned Finish	Total Float 2014 2015 Oct N D Jan F M Apr M A S Oct N J Jul A S Oct N J Jul A S Oct N J Jul A S Oct N D Jan F M Apr M Apr M Apr A S Oct N D Jan F M Apr Apr M Apr Apr<	2016 I J Jul <i>I</i>									
liminary Master P	rogramme Revision 2	827d	14-Oct-13	31-Jul-16											
eliminaries		827d	14-Oct-13	3 31-Jul-16	Od Contraction of the second se										
ontract Key Dates		Od	14-Oct-13	3 14-Oct-1	od la										
C3840-CD-20	Date of Commencement	0d	14-Oct-13	3	0d Date of Commencement										
pecified Degrees of (Completion	Od	31-Jul-16	31-Jul-16	DOD										
C3840-CD-2A	Complete to Deg. 1 status for all civil engineering works and ABWF in Subway outside K11 Lot Boundary (31 Jul 16)	0d		31-Jul-16	Od	 +									
ossession of Works /	Area As PS Clause P8 & PS Appendix G	Od	31-Oct-13	31-Oct-1	od										
C3840-AD-20	Access Date for Works Area 3840.W1 (subject to SLG/TMLG Approval)	0d	31-Oct-13	3	0d 🔿 Access Date for Works Area 3840.W1 (subject to SLG/TMLG Approval)										
tial Site Survey		35d	31-Oct-13	3 10-Dec-1	od										
C3840-SS-20	Validate the survey record and carry out any necessary additional survey at Works Areas 3840.W1 & W2	35d	31-Oct-13	3 10-Dec-1	0d Validate the survey record and carry out any necessary additional survey at Works Areas 3840. W1 & W2										
nporary Works Des	ign & Approval Process (Incl. Demolition)	12d	16-Oct-13	30-Oct-1											
Temporary Traffic Ma	ngement Scheme (TTM)	12d	16-Oct-13	3 30-Oct-1											
C3840-TTM-100	Appoint Traffic Consultant	0d		16-Oct-1	0d ▶ Appoint Traffic Consultant										
C3840-TTM-110	Pepare & submit review by Eng Outline TTM Schemes as per PS P20.4	6d	17-Oct-13	3 23-Oct-1	0d 11 Pepare & submit review by Eng Outline TTM Schemes as per PS P20.4										
C3840-TTM-120	Eng review Outline TTM Schemes	4d	24-Oct-13	3 28-Oct-1	Od - Eng review Outline TTM Schemes										
C3840-TTM-130	Prepare Detailed TTMS	5d	24-Oct-13	3 29-Oct-1											
C3840-TTM-140	Discussion and agree in priniciple at TMLG Meeting	1d	30-Oct-13	3 30-Oct-1	0d P Discussion and agree in priniciple at TMLG: Meeting										
			14-Nov-13		8d										
	bway and Entrances		14-Nov-13		8d										
	(Advance Ground Works & Piling Works)														
Advance Ground Wor			14-Nov-13												
C3840-AGW-020	Trial Pit/trench excavation	69d		3 08-Feb-1	Od Frial Pit/trench excavation										
C3840-AGW-040	Pre-drilling works	24d	27-Dec-13	3 24-Jan-1	0d Pre-drilling works										
Piles & Grouting for V	/ertical Shaft	51d	27-Feb-14	1 02-May-1	8d										
C3840-EVS-010	Mobilization for Piling Rig and Setup	4d	27-Feb-14	1 03-Mar-1	Od Mobilization for Piling Rig and Setup										
C3840-EVS-020	52 nos. pipe piles with 1m. to 2.2m. minimum rock socket	35d	04-Mar-14	14-Apr-1	0d 0d 52 nos. pipe piles with 1m. to 2.2m. minimum rock; socket										
C3840-EVS-030	Grouting for Vertical Shaft Bulk Head	18d	17-Mar-14	1 07-Apr-1	8d Grouting for Vertical Shaft Bulk Head										
C3840-EVS-040	Curtain Grouting vertical shaft	18d	08-Apr-14	02-May-1	8d										
nnel (Vertical Shaft I	Excavation)	226d	03-May-14	4 31-Jan-1	88										
C3840-SH-100	Pump Test	24d	03-May-14	4 31-May-1	8d Pump Test										
C3840-SH-110	Excavation for 1st layer 140m3 50m3/day	3d	03-Jun-14	4 05-Jun-1	8d Excavation for 1st layer 140m3 50m3/day										
C3840-SH-120	Install 1st waling, strut & legging wall	4d	06-Jun-14	10-Jun-1	8d Install 1st waling, strut & legging wall										
C3840-SH-130	Shotcrete 1st layer	2d	11-Jun-14	12-Jun-1	8d Shotcrete, 1st layer										
Actual Work	♦ ♦ Milestone			I	Date: 11-Oct-13										
Remaining World					Page 1 of 3 Preliminary Master Programme	Date									
Critical Remainir	ng Work				- 27	27-Feb-14									

Critical Remaining Work

									N	AA	ED	A					
A	S	Oct	N	D	Jan	F	М	Apr	М	20 J	17 Jul	A	S	Oct	N	D	018 Jan
	з г прк		De	g. 1 :	statu	S TOP	aii c	ivil e	ngine	erin	g wa	rks :	and /		- IN	SUDV	vay (
							a/P/	ΡM									
е					isio	n			Che	ecke	ed			Арр	oro∖	/ed	
1		R	ΕV	2			E	3G					AW	/			

Remarks : It is being reviewed and will be updated soon

	🔀 MTR		CONTRACT C3840-13C Tsim Sha Tsui Station, Carnarvon Road Subway																			
	Activity Name	Orig Dur	Planned Start	Planned Finish	Total Float) Jan F	MAprin	20 N J		S Oct	ND	lan F	M Apr		015 Jul A	50	ct N	D lan	FM	Apr M	2016 I J JI
C3840-SH-140	Excavation for 2nd layer 190m3 50m3/d	4d	13-Jun-14	17-Jun-14	8d			101 / ¢1 1			on for 2nd								Diodan		i pi m	
C3840-SH-150	Install 2nd waling, strut & lagging wall	4d	18-Jun-14	4 21-Jun-14	8d				Ŀ	Install 2	id waling,	strut &	agging v	/all								
C3840-SH-160	Shotcrete 2nd layer	2d	23-Jun-14	4 24-Jun-14	8d				Ŀ	Shotcre	te 2nd lay	/er										
C3840-SH-170	Install Decking with Subframe to cover all area	4d	25-Jun-14	28-Jun-14	- 8d					Install	ecking v	/ith \$ubf	ame to	over all a	rea							
C3840-SH-180	Excavation for 3rd layer 360m3 50m3/d	7d	30-Jun-14	4 08-Jul-14	8d				Ļ	Exca	ation for	3rd layer	360m3	50m3/d								
3840-SH-190	Install 3rd waling, strut & lagging wall	5d	09-Jul-14	14-Jul-14	8d				Ļ	linsta	ll 3rd wali	ng, strut	& laggin	g wall								
3840-SH-200	Shotcrete 3rd layer	2d	15-Jul-14	16-Jul-14	8d				Ļ	Sho	crete 3rd	layer										
840-SH-210	Excavation for 4th layer117m3 (soil) @ 50m3/d, 205m3 (rock) 3m3/d	71d	17-Jul-14	10-Oct-14	8d				ļ			xcavatio	ሰ for 4th	layer 117r	h3 (soil)	@ 50m3	/d, 205m	n3 (rock) 3m3/d			
840-SH-230	Shotcrete 4th layer	2d	11-Oct-14	13-Oct-14								Shotcret	• 4th lay	er								
3840-SH-240	Make formation and Blinding	2d	14-Oct-14	4 15-Oct-14	8d						Γ,	Make for	mation a	nd Blindin	g							
840-SH-250	Modify waling and strut	3d	16-Oct-14	18-Oct-14	8d						Γ		/aling an									
840-SH-260	Adjustable Steel Platform Setup for Grouting & Piling Works)	12d		01-Nov-14	8d						Ĺ			el Platforn	Setun	for Grouti	na & Pili	nd Worl	ks)			
3840-SH-270	Horizontal Grouting (48 Nos. Grout Holes)			4 03-Dec-14	8d						Ĺ			Grouting					,			
3840-SH-280	Horizontal Pipe Roofing (59 Nos. Pipe Pile)			4 07-Jan-15										ontal Pipe								
																	. гіре г					
D-SH-290	Horizontal Re-grouting	14d		5 23-Jan-15	8d							-	Γ	prizontal R								
40-SH-300	Install Portal Frame	3d		5 27-Jan-15	8d								Ι Γ Ι	stall Porta								
840-SH-310	Cut Pipe Pile	4d	28-Jan-15	5 31-Jan-15	8d									ut Pipe Pi	le							
el (ELS, Excavati	ion & Construction of Tunnel)	408d	02-Feb-15	5 22-Jun-16	8d																	
3840-TU-100	Excavation, shotcrete & install steel framework support for 1st 6m	70d	02-Feb-15	5 02-May-15	8d -								-		Exca	vation, sh	otcrete 8	& install	steel fra	mework	support	for 1st
40-TU-110	Excavation, shotcrete & install steel framework support for next 7m	75d	04-May-1	5 01-Aug-15	8d									ا	_		xcavatio	on, shoto	crete & i	nstall ste	el framev	work su
840-TU-120	Excavation, shotcrete & install steel framework support for last 7m	75d	03-Aug-15	5 31-Oct-15	8d											┕╴		Exc	avation	shotcre	te & insta	all steel
840-TU-130	Install intermediate portal frame	3d	02-Nov-15	5 04-Nov-15	8d													Ins	tallinter	mediate	portal fra	ame
C3840-TU-140	Install intermediate horizontal pipe roofing incl. mobilization & demobilization	19d	05-Nov-15	5 26-Nov-15	8d														Install ir	htermedi	ate horizo	ohtal pip
3840-TU-150	Horizontal re-grouting for intermediate section	6d	27-Nov-15	5 03-Dec-15	- 8d													- 1-1	Horizo	ntal re-g	routing fo	or interr
3840-TU-160	Install Support, excavation & shotcret for intermediate section	33d	04-Dec-1	5 14-Jan-16	8d													L	_	Install Su	ipport, ex	kçavatic
3840-TU-180	Install dowel bars & concrete collar beams	10d	15-Jan-16	6 26-Jan-16	8d															Install	dowel bar	rs & co
3840-TU-210	Breakthrough (core & saw cut) into K11 Lot & associated works	18d	27-Jan-16	6 19-Feb-16	8d														L	Bre	akthroug	jh (care
3840-TU-220	Construct Slab 2 Bays (2 pours)	12d	20-Feb-16	6 04-Mar-16	8d															- - c	Construct	Slab 2
3840-TU-230	Construct Wall & Roof (incl. removal of struts) 2 Bays (8 pours)	64d	05-Mar-16	6 25-May-16																		Const
3840-TU-240	Curing	10d	26-May-16	6 06-Jun-16	8d																L	🗖 Curi
3840-TU-250	Dismantle falsework	10d	31-May-16	6 11-Jun-16	8d																	— Dis
3840-TU-260	Grouting into void above	6d	13-Jun-16	6 18-Jun-16	8d																	G
																						ГЦ
Actual Work	♦ ♦ Milestone			Data	Date: 11-	Oct-1	3															
Remaining Wor	rk				Page 2 of	3					Pre	limi	nary	Mast	ter P	rogra	amm	ne			27	Da 7-Feb-
Critical Remaini	ing Work				5 5.									Criti							21	-rep-

									N			A					
A	s	Oct	N	D	Jan	F	М	Apr	М	20 J)17 Jul	A	S	Oct	N	D	018 Jan
~	0		N		Jan	1	101	Лрі	101	5	Jui	<u>^</u>	0	001		U	Jan
		supp		or la	st 7n	h											
	ng in sec	cl. m	obiliz	zatio	h & d	emo	biliz	ation			- - - - - - - - - - - -						
rete	colla	t for tr bea	ams														
ys (2	2 poi	into Irs) Roc								s (8 j	pour	-6)					
		ewor															
uting	into	void	abov	/e													
					Ма	eda	a/P/	'ΡΜ	P/2								
e		Т	F	Rev	isio		Ť		Che	ecke	ed			App	orov	/ed	
4			EV.				-	3G					AW				
•			_ •	-													

MTR			CONTRACT C3840-13C Tsim Sha Tsui Station, Carnarvon Road Subway																						
Activity ID	Activity Name	Orig	Planned	Planned	Total Float				20	014				2015					2016				20	17	0
		Dur	Start	Finish		Oct N	D Jan	F M Apr	M J	Jul A	S Oct N	D Jar	n F M Apr M	1 J Jul	A S O	ct N [D Jan F	M Apr M	1 J Jul	A S	Oct N D Ja	n F M /	vpr M J	Jul A	S Oct N D Ja
	C3840-TU-270 Cut Pipe pile at interface	3d	20-Jun-16	22-Jun-16	8d														Le Cut	Pipe pile	e at interface				
Bu	ilding Services & ABWF Works	70d	27-Apr-16	21-Jul-16	8d																				
E	3S & ABWF Works at Subway Conc. Level and Plant Room & D3	70d	27-Apr-16	21-Jul-16	8d																				
	C3840-BSS-120 ABWF Works to Deg. 1 Completion	70d	27-Apr-16	21-Jul-16	8d													-	+	ABWF \	Works to Deg. 1	Completion			

Actual Work Milestone	Data Date: 11-Oct-13		
Remaining Work		Preliminary Master Programme	Date
	Page 3 of 3		27-Feb-14
Critical Remaining Work		Extract Critical Path 1	

Maeda/P/PMP/2											
e	Revision	Checked	Approved								
1	REV 2	BG	AW								

MTR	CONTRACT	C3840-13C Tsim Sha Tsui Station, Carnarvon Road Subway	
Activity ID Activity Name	Orig Planned Planned Total Float Dur Start Finish Oct N.D.Ian F.	2014 2015 M Apr M J Juli A S Oct N D Jan F M Apr M J Juli A S Oct N D Jan F M	2016 2017 0
Preliminary Master Programme Revision 2	898d 11-Oct-13 23-Oct-16 0d		
Preliminaries	898d 11-Oct-13 23-Oct-16 Od		
Contract Key Dates	3d 11-Oct-13 14-Oct-13 0d		
C3840-CD-10 Date of Contract Award	0d 11-Oct-13 0d Date of Contract A	vard	
C3840-CD-20 Date of Commencement	0d 14-Oct-13 0d ▶ Date of Commence	ament	
Specified Degrees of Completion	0d 23-Oct-16 23-Oct-16 0d		
C3840-CD-2C Complete energisation of the power isolator in the Telephone Equipment Rm (23 Oct	0d 23-Oct-16 0d		Complete energisation of the power isolator in the Telephone Eq
16) Possession of Works Area As PS Clause P8 & PS Appendix G	0d 31-Oct-13 31-Oct-13 0d		
C3840-AD-20 Access Date for Works Area 3840.W1 (subject to SLG/TMLG Approval)		Works Area 3840.W1 (subject to SLG/TMLG Approval)	
Initial Site Survey	35d 31-Oct-13 10-Dec-13 0d		
C3840-SS-20 Validate the survey record and carry out any necessary additional survey at Works Areas 3840.W1 & W2	35d 31-Oct-13 10-Dec-13 0d	e survey record and carry out any necessary additional survey at Works Areas 3840.W1 & W2	
Procurement of Subcontract Packages	4d 11-Oct-13 16-Oct-13 0d		
Preliminaries and Utilities Diversion	4d 11-Oct-13 16-Oct-13 0d		
C3840-PRC-140 Temporary Traffic Diversion (Consultant)	4d 11-Oct-13 16-Oct-13 0d 1 Temporary Traffic	Diversion (Consultant)	
Temporary Works Design & Approval Process (Incl. Demolition)	12d 16-Oct-13 30-Oct-13 0d		
Temporary Traffic Mangement Scheme (TTM)	12d 16-Oct-13 30-Oct-13 0d		
C3840-TTM-100 Appoint Traffic Consultant	0d 16-Oct-13 0d ➡ Appoint Traffic Co	Isultant	
C3840-TTM-110 Pepare & submit review by Eng Outline TTM Schemes as per PS P20.4	6d 17-Oct-13 23-Oct-13 0d • 17 Pepare & submit	review by Eng Outline TTM Schemes as per PS P20.4	
C3840-TTM-120 Eng review Outline TTM Schemes	4d 24-Oct-13 28-Oct-13 0d Eng review Outli	ne TTM Schemes	
C3840-TTM-130 Prepare Detailed TTMS	5d 24-Oct-13 29-Oct-13 0d -1 Prepare Detailed		
C3840-TTM-140 Discussion and agree in priniciple at TMLG Meeting		agree in priniciple at TMLG Meeting	
Carnarvon Road Subway and Entrances	774d 14-Nov-13 28-Jun-16 0d		
Utility Diversion	57d 10-Feb-14 17-Apr-14 0d		
C3840-UTD-290 Diversion of Gasmain as necessary	57d 10-Feb-14 17-Apr-14 Od	Diversion of Gasmain as necessary	
Open Cut Sequence 1 (Advance Ground Works & Piling Works)	444d 14-Nov-13 18-May-15 Od		
Advance Ground Works	69d 14-Nov-13 08-Feb-14 0d		
C3840-AGW-020 Trial Pit/trench excavation	69d 14-Nov-13 08-Feb-14 Od	rial Pit/trench excavation	
Piles & Grouting for Vertical Shaft	39d 27-Feb-14 14-Apr-14 0d		
C3840-EVS-010 Mobilization for Piling Rig and Setup	4d 27-Feb-14 03-Mar-14 0d	Mybilization for Piling Rig and Setup	
C3840-EVS-020 52 nos. pipe piles with 1m. to 2.2m. minimum rock socket	35d 04-Mar-14 14-Apr-14 0d	52 nos. ppe piles with 1 m. to 2.2m. minimum rock socket	
Piles & Grouting for Temporary Staricase & C&C Subway	59d 15-Apr-14 28-Jun-14 0d		
C3840-ETS-020 70 nos. pipe piles along Grid Line A with 1m. to 3.1m minimum rock socket	47d 15-Apr-14 14-Jun-14 Od	• 0 nos. pipe piles along Grid Line A with 1m. to 3.1m minimum rock socket	
	Data Date: 11-Oct-13	l	Maeda/P/PMP/2
Actual Work Milestone Remaining Work		Preliminary Master Programme	Date Revision Checked Approved
Critical Remaining Work	Page 1 of 5	Extract Critical Path 2	27-Feb-14 REV 2 BG AW
		Extract Critical Path 2	

	MTR	CONTRACT	C3840-13C Tsim Sha Tsui Station, Carnarvon Road Subway	
vity ID	Activity Name	Orig Planned Planned Total Float	2014 2015 2016 M Apr M J Jul A S Oct N D Jan F M Apr M J Jul A S Oct N D JAN F M Apr	2017
C3840-ETS-030	Curtain Grouting along Grid Line A	24d 29-May-14 26-Jun-14 2d		
C3840-ETS-070	Type III Sheet Plle, 355m along between Grids A & B	6d 22-Apr-14 28-Apr-14 0d	Type III Sheet Pile, 355m along between Grids A & B	
C3840-ETS-080	Toe Grouting	8d 29-Apr-14 09-May-14 Od	Top Grouting	
C3840-ETS-090	Mobilization for Piling Rig and Setup	4d 10-May-14 14-May-14 0d	Mobilization for Piling Rig and Setup	
C3840-ETS-110 :	37 nos. pipe piels along Grid Line B with 1m. to 1.5m. minimum rock socket	25d 15-May-14 13-Jun-14 Od	37 nos. pipe piels along Grid Line B with 1m. to 1.5m. minimum rock socket	
C3840-ETS-120 (Curtain Grouting along Grid Line B	13d 14-Jun-14 28-Jun-14 Od	Curtain Grouting along Grid Line B	
Piles & Grouting for Rema	ining Section of Cofferdam at D2	20d 24-Apr-15 18-May-15 0d		
C3840-ECD-010	Mobilization for Piling Rig and Setup	4d 24-Apr-15 28-Apr-15 0d	P	
C3840-ECD-020 2	23 nos. pipe piles along Grid Line B at D2 with 1m. to 3.2m minimum rock socket	16d 29-Apr-15 18-May-15 0d	23 nos. pipe piles along Grid Line B at D2 with 1m. to 3.2m minimum rock	socket
	avation for Temporary Staricase)	209d 30-Jun-14 11-Mar-15 0d		
	avation of remporary stancase)			
Excavation		93d 30-Jun-14 20-Oct-14 0d		
C3840-EXC-100	Pump test prior to excavate for temporary staricase	24d 30-Jun-14 28-Jul-14 Od	Putting test prior to excavate for temporary staricase	
C3840-EXC-120	Excavation for 1st layer at D1 208m3	4d 29-Jul-14 01-Aug-14 0d	Excavation for 1st layer at D1:208h3	
C3840-EXC-130 I	Install 1st waling & strut 21ton & temporary support to underground UUs	7d 02-Aug-14 09-Aug-14 0d	Install 1st walling & strut 21ton & temporary support to underground UUs	
C3840-EXC-140	Install Truss for Suport Temp D1	6d 11-Aug-14 16-Aug-14 0d	Install Truss for Suport Temp D	
C3840-EXC-150 \$	Shotcrete 1st layer	2d 18-Aug-14 19-Aug-14 Od	Shotcrete 1st layer	
C3840-EXC-160	Demolish D1 4m below GL	6d 20-Aug-14 26-Aug-14 0d	Demolish D1 4m below GL	
C3840-EXC-170	Excavation for 2nd layer at D1 230m3	5d 27-Aug-14 01-Sep-14 0d	Excavation for 2nd layer at D1 230m3	
C3840-EXC-180	Install 2nd waling & strut 17ton	7d 02-Sep-14 10-Sep-14 0d	Iḥstall 2nd waling & strut 17ton	
C3840-EXC-190 \$	Shotcrete 2nd layer	2d 11-Sep-14 12-Sep-14 0d	♣ \$hot¢rete 2nd layer	
C3840-EXC-200	Excavation for 3rd layer at D1 216m3	5d 13-Sep-14 18-Sep-14 0d	- ■ Excavation for 3rd layer at 101 216m/3	
C3840-EXC-210	Install 3rd waling & strut 15ton	6d 19-Sep-14 25-Sep-14 0d	-∎ Install 3rd waling & strut 15ton	
	Shotcrete 3rd layer	4d 26-Sep-14 30-Sep-14 0d	Shotcrete 3rd layer	
			Г	
	Excavation for 4th layer at D1 166m3	4d 03-Oct-14 07-Oct-14 0d	Excavation for 4th layer at D1 166m3	
	Install channel on opening	3d 08-Oct-14 10-Oct-14 0d	linstali channelon opening	
C3840-EXC-250 \$	Shotcrete 4th layer	4d 11-Oct-14 15-Oct-14 0d	Shotcrete 4th layer	
C3840-EXC-260 I	Make formation and Blinding	4d 16-Oct-14 20-Oct-14 0d	Make formation and Binding	
RC Structure (Temporary S	Staricase)	116d 21-Oct-14 11-Mar-15 0d		
C3840-TSC-100 I	Install Dowel bars (130#)	6d 21-Oct-14 27-Oct-14 0d	Install Dowel bars (120#)	
C3840-TSC-110 (Const. Bay1 : 18m3	6d 28-Oct-14 03-Nov-14 0d	Const. Bayl : 18m3	
C3840-TSC-120	Const. Bay2 : 16m3	9d 04-Nov-14 13-Nov-14 0d	Const. Bay2 ::16m3	
C3840-TSC-130	Const. Bay3 : 6m3	6d 14-Nov-14 20-Nov-14 0d	Const. Bay3: 6m	
Actual Work	♦ ♦ Milestone	Data Date: 11-Oct-13		Maeda/P/PMP/2
Remaining Work		Page 2 of 5	Preliminary Master Programme Date 27-Feb-14	Revision Checked Approved
Critical Remaining W	Vork		Extract Critical Path 2	

MTR			CONTRACT C3840-13C Tsim Sha Tsui Station, Carnarvon Road Subway										
Activity ID		Activity Name	Orig Dur	Planned Start	Planned Finish	Total Float	2014 2015 2016 2017 ct N D Jan F M April M J Jul A S Oct N D Jan F M April M J Jul A S Oct N D Jan F M April M J Jul A S Oct N D Jan F M April M J Jul A S Oct N D Jan F M April M J Jul A S Oct N D Jan F M April M Jul A S Oct N D Jan F M April M Jul A S Oct N D Jan F M April M Jul A S Oct N D Jul						
с	3840-TSC-150	Const. Bay5 : 35m3	13d	21-Nov-14	05-Dec-14								
c	3840-TSC-160	Const. Bay6 : 39m3	15d	06-Dec-14	4 23-Dec-14	Od	Const. Bay6. 39m3						
с	3840-TSC-170	Const. Bay7 : 34m3	14d	16-Dec-14	1 03-Jan-15	0d	Const Bay: : 34m3						
c	3840-TSC-180	Const. Bay8 : 4m3	6d	31-Dec-14	4 07-Jan-15	Od	under Stein						
С	3840-TSC-190	Const. Bay9 : 44m3	14d	08-Jan-15	23-Jan-15	Od	Const. Eay9 : 44m3						
с	3840-TSC-240	Temporary Staircase Commissioning & open for use	Od		11-Mar-15	Od	Temporary Staircase Commissioning & open for use						
Open (Cut Sequence 3 (A	dvance Ground Works & Piling Works at D2 & in front of D1)	33d	12-Mar-15	5 23-Apr-15	Od							
C384	40-ELS-510	Joint Survey & Remove existing BS & ABWF Services at D2	6d	12-Mar-15	5 18-Mar-15	Od	Joint Survey & Remové existing BS & ABWF Services at D2						
C384	40-ELS-520	Const Flood Barrier at Concourse and D2	9d	19-Mar-15	5 28-Mar-15	Od	Const Flood Barrier at Concourse and D2						
C384	40-ELS-530	Demolish D2 above GL	12d	30-Mar-15	5 16-Apr-15	Od	Demdlish D2 above GL						
C384	40-ELS-540	Set Conc block in D2 opening	6d	17-Apr-15	23-Apr-15	Od	Set:Conc black in D2;opening						
Open (Cut Sequence 4 (E	xcavation for Subway in front of D1)	182d	27-Jun-15	02-Feb-16	Od							
C384	40-ELSD1-100	Excavation for 1st layer 378m3, 25m3/day	15d	27-Jun-15	5 15-Jul-15	Od	Excavation for 1st/layer 378m3, 25m3/day						
C384	40-ELSD1-110	Install 1st waling & strut & Utility Support	24d	03-Jul-15	30-Jul-15	Od	Install 1st waling & strut & Utility Support						
C384	40-ELSD1-130	Install Decking with Subframe to cover all area	12d	31-Jul-15	13-Aug-15	Od	🤟 İnstall Decking with Subframe to cover all area						
C384	40-ELSD1-140	Shotcrete 1st layer	2d	14-Aug-15	5 15-Aug-15	Od	Shotcrete 1st;layer						
C384	40-ELSD1-150	Excavation for 2nd layer 421m3 50m3/day	9d	17-Aug-15	5 26-Aug-15	Od	Excavation for 2nd layer 421m3 50m3/day						
C384	40-ELSD1-160	Install 2nd waling & strut	8d	21-Aug-15	5 29-Aug-15	Od	Install 2nd waling & strut						
C384	40-ELSD1-170	Shotcrete 2nd layer	2d	31-Aug-15	5 01-Sep-15	Od	Shotcrete 2nd layer						
C384	40-ELSD1-180	Demolish existing subway 7.5m below GL	6d	02-Sep-15	6 08-Sep-15	Od	Demojish existing subway 7.5m below GL						
C384	40-ELSD1-190	Excavation for 3rd layer 421m3, 50m3/d	9d	09-Sep-15	5 18-Sep-15	Od	Excavation for 3rd layer 421m3; 50m3/d						
C384	40-ELSD1-200	Install 3rd waling & strut	8d	14-Sep-15	5 22-Sep-15	Od	Install 3rd waling & strut						
C384	40-ELSD1-210	Shotcrete 3rd layer	2d	23-Sep-15	5 24-Sep-15	Od	Shotcrete 3rd layer						
C384	40-ELSD1-220	Demolish existing subway 10.6m below GL	6d	25-Sep-15	5 03-Oct-15	Od	Demofish existing subway 10,6m below GL						
C384	40-ELSD1-230	Excavation for 4th layer 443m3, 50m3/d	9d	05-Oct-15	14-Oct-15	Od	Excavation for 4th layer 443m3, 50m3/d						
C384	40-ELSD1-240	Install 4th waling & strut	8d	09-Oct-15	17-Oct-15	Od	jnstall 4th waing & strut						
C384	40-ELSD1-250	Shotcrete 4th layer	2d	19-Oct-15	20-Oct-15	Od	Shotcrete 4th layer						
C384	40-ELSD1-260	Excavation for 5th layer 443m3, 50m3/d	9d	22-Oct-15	31-Oct-15	Od	Excavation for 5th layer 443m3, 50m3/d						
C384	40-ELSD1-270	Install 5th waling & strut	8d	27-Oct-15	04-Nov-15	Od	└╾∰ InstallSth waling & strut						
C384	40-ELSD1-280	Shotcrete 5th layer	2d	05-Nov-15	5 06-Nov-15	Od	Shotcrete 5th layer						
C384	40-ELSD1-290	Excavation Soil for 6th layer 392m3, 50m3/d	8d	07-Nov-15	5 16-Nov-15	Od	Excavation Soil for 6th layer 392m3, 50m3/d						
C384	40-ELSD1-300	Excavation Rock (Grade 2) 402m3, 8m3/d	50d	17-Nov-15	5 16-Jan-16	Od	Excavation Rock (Grade 2) 402m3, 3m3/d						
						ata Date: 11-							
	ctual Work	♦ Milestone			Da		Preliminary Master Programme Date Revision Checked Approv						
	emaining Work ritical Remaining	y Work				Page 3 of	f 5 27-Feb-14 REV 2 BG AW						
							Extract Critical Path 2						

	MTR				CONTRACT C3840-13C Tsim Sha Tsu	ui Station, Carnarvon Road Subwa	у	
Activity ID	Activity Name	Orig Planned Dur Start	Planned Finish	Total Float	2014 Oct N D Jan F M Apr M J Jul A S Oct N [2016	2017 0' A S Oct N D Jan F M Apr M J Jul A S Oct N D Ja
C3840-ELSD1-310	Install 6th waling & strut	8d 18-Jan-16	6 26-Jan-16	0d			Install 6th waling & strut	
C3840-ELSD1-320	Shotcrete 6th layer	2d 27-Jan-16	6 28-Jan-16	0d			Shotcrete 6th layer	
C3840-ELSD1-330	Make formation and Blinding	4d 29-Jan-16	02-Feb-16	0d			Make formation and Blindi	ng
Open Cut Sequence 5 (C	Construction of Subway & D2)	116d 03-Feb-16	6 28-Jun-16	0d				
C3840-STR-110	Const. Bay1 : 4m3	6d 03-Feb-16	3 12-Feb-16	Od			Const. Bay1 : 4m3	
C3840-STR-120	Const. Bay2 : 123m3	10d 13-Feb-16	6 24-Feb-16	0d			Const. Bay2 : 123m3	
C3840-STR-130	Const. Bay3.1 : 125m3	10d 25-Feb-16	6 07-Mar-16	0d			Const. Bay3.1 : 125m	3
C3840-STR-140	Const. Bay3.2 : 120m3	15d 08-Mar-16	6 24-Mar-16	0d			Const. Bay3 2 : 12	lm3
C3840-STR-150	Const. Bay4 : 29m3	6d 18-Mar-16	6 24-Mar-16	0d			Const. Bay4 : 29m	3
C3840-STR-160	Const. Bay4.5 : 13m3	6d 23-Mar-16	6 01-Apr-16	0d			Const. Bay4.5 : 1	3m(3
C3840-STR-170	Const. Bay5 : 141m3	10d 31-Mar-16	6 12-Apr-16	0d			Const. Bay5 : 14	ит3
C3840-STR-180	Const. Bay6.1 : 130m3	12d 13-Apr-16	26-Apr-16	0d			Const. Bay6.1	: 130m3
C3840-STR-190	Const. Bay6.2 : 130m3	12d 18-Apr-16	30-Apr-16	0d			Const. Bay6.	2: 1130013
C3840-STR-200	Const. Bay6.3 : 130m3	12d 22-Apr-16	06-May-16	Od			Const. Bay6	3 130 <mark> n</mark> 3
C3840-STR-210	Const. Bay6.4 : 130m3	12d 27-Apr-16	11-May-16	Od			Const. Baye	.4: 130m3
C3840-STR-220	Const. Bay6.5 : 130m3	15d 03-May-1	6 20-May-16	Od			Const. Ba	/6.5 : 1\$0m3
C3840-STR-240	Const. Bay7 : 90m3	15d 06-May-1	6 24-May-16	0d			Const. Ba	y7: 90m3
C3840-STR-260	Const. Bay8.1 : 104m3	10d 12-May-10	6 24-May-16	Od			Cohst. Ba	y8;1:104m3
C3840-STR-270	Const. Bay8.2 : 104m3	10d 19-May-1	6 30-May-16	0d			Const. B	ay8.2 : 04m3
C3840-STR-280	Const. Bay8.5 : 39m3 (D2)	15d 25-May-1	6 11-Jun-16	0d			Çonst.	Baye.5 39m3 (D2)
C3840-STR-290	Curing, remove strut & falsework	14d 13-Jun-16	6 28-Jun-16	0d			Curi	ng, remwve strut;& falsewprk
Building Services & A	NRWF Works	533d 05-Jan-15	5 22-Oct-16	0d				
BS & ABWF Works at Te		54d 05-Jan-15		0d				
C3840-TSBA-100		0d	23-Jan-15	0d		► P Complețe RC works		
C3840-TSBA-110		40d 05-Jan-15		0d		Symplete Rowerks The stallation of BS and ABWF works		
C3840-TSBA-120		40d 05-Jan-15		1d		CN&SE access & cable routing connecting to		
C3840-TSBA-130		6d 25-Feb-1		Od				
C3840-TSBA-140		6d 04-Mar-1		Od		Inspection prior to open for public use		
C3840-TSBA-150		0d	11-Mar-15	0d		Open for public use		
		96d 29-Jun-16		Od				
C3840-BSM-100		56d 29-Jun-16	02-Sep-16	Od				BS 1st Fix
C3840-BSM-110	BS 2nd Fix	40d 03-Sep-16	6 22-Oct-16	0d				BS 2nd Fix
			Da	ata Date: 11	1-0ct-13		1	Maeda/P/PMP/2
Actual Work	♦ Milestone		Da		Prelim	inary Master Programme	Date	Revision Checked Approved
Critical Remaining				Page 4 c	015	xtract Critical Path 2	27-Feb-14	REV 2 BG AW
						Analt Chulder I alli 2		

MTR				CONTRACT C3840-13C Tsim Sha Tsui Station, Carnarvon Road Subway																			
Activity ID	Activity Name		Planned Start	Planned Finish	Total Floa	Cct N D	Jan F	M Apr M	2014 J Jul A	S Oct N D	Jan F	M Apr M	2015 J Jul A	S Oct N D	Jan F M	201 Apr M J	6 Jul A	S Oct N	J D Jan F	M Apr	2017 M J Jul	ASOC	018 ct N D Jan
C3840-BSM-120	Complete all BS works in TER	Od		22-Oct-16	00													G C	omplete all BS	works in Tf	ER		
						•		, , , ,															

Actual Work Milestone	Data Date: 11-Oct-13		
Remaining Work		Preliminary Master Programme	Date
Critical Remaining Work	Page 5 of 5		27-Feb-14
		Extract Critical Path 2	

Maeda/P/PMP/2												
е	Revision	Checked	Approved									
4	REV 2	BG	AW									

APPENDIX D

IMPLEMENTATION SCHEDULE

Appendix VIII

Implementation Schedule

Project Profile Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concerns to address	Implementation Parties	Location of the measure	When to implement the measure	Relevant requirements or standards for the measure to achieve
	Noise Impact	1			-	
S.3.1	Use of quieter plant	To minimise construction noise emissions	Contractor	Work site	Construction Stage	ProPECC PN2/93 and Noise Control Ordinance
S.3.1	 Use of noise enclosure and movable barrier movable barrier can achieve a 5 dB(A) reduction for movable PME and 10 dB(A) reduction for stationary PME; noise enclosure can achieve 15dB(A) reduction for PME; A typical design barrier with a steel frame of vertical / cantilever type would be adopted and located close to the noise generating part of PME; Barrier material of surface mass in excess of 7kg/m² shall be required to achieve the maximum screening effect (and minimum 10kg/m² for noise enclosure); The length of barrier should generally be at least five times greater than its height and the minimum height of a barrier should be such that no part of the noise source will be visible from the noise sensitive receiver being protected. 	To minimize construction noise emissions	Contractor	Work site	Construction Stage	ProPECC PN2/93, Noise Control Ordinance and EIAO Guidance Note NO. 9/2010
S.3.1	General Construction Noise Control MeasuresThe Code of Practice on Good Management Practice	To minimize construction noise	Contractor	Work site	Construction Stage	ProPECC PN2/93 and Noise Control

Project Profile Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concerns to address	Implementation Parties	Location of the measure	When to implement the measure	Relevant requirements or standards for the measure to achieve
	 to Prevent Violation of the Noise Control Ordinance (Chapter 400) (for Construction Industry) published by EPD shall be adopted; The statutory and non-statutory requirements and guidelines shall be complied with; Approval for the method of working, equipment and noise mitigation measures intended to be used at the site shall be granted from the Project Engineer before commencing any work; Working methods to minimize the noise impact on the surrounding NSRs shall be formulated and executed, and the implementation of these methods shall be monitored by experienced personnel with suitable training; Noisy equipment and noisy activities shall be located as far away from the NSRs as is practical; Unused equipment shall be turned off; PME should be kept to a minimum and the parallel use of noisy equipment shall be maintained regularly; and Material stockpiles and other structures shall be effectively utilized as noise barriers, whenever practicable. 	emissions				Ordinance
	Air Quality Impact					
S.3.2	 Construction Dust Control Measures Decking will be provided subsequent to the completion of surface excavation works. The duration 	To minimise the dust impacts arising from the	Contractor	Work site	Construction Stage	Air Pollution Control (Construction

Project Profile Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concerns to address	Implementation Parties	Location of the measure	When to implement the measure	Relevant requirements or standards for the measure to achieve
	 of decking is around 13 months after surface excavation works; Regular watering to reduce dust emissions from all exposed site surface, particularly during dry weather; Frequent watering for particularly dusty construction areas and areas close to air sensitive receivers; Cover all excavated or stockpile of dusty material by impervious sheeting or spraying with water to maintain the entire surface wet; Provision of vehicle washing facilities at the exit points of the site; and Provision of tarpaulin covering of any dusty materials on a vehicle leaving the site. 	construction works				Dust) Regulation
	Water Quality Impact					
S.3.3	 Construction Water Quality Impact Measures The Contractor should design and implement all the mitigation measures and practices specified in the ProPECC PN 1/94 "Construction Site Drainage" and "Recommended Pollution Control Clauses for Construction Contracts" issued by EPD. All runoffs arising from the construction site should be properly collected and treated to ensure the discharge standards as stipulated in WPCO are met. Silt trap and oil interceptor should be provided to remove the oil, lubricants, grease, silt, grit and debris from the wastewater before being pumped to the public stormwater drainage system. The silt traps and oil interceptors should be cleaned and maintained regularly. 	To reduce water quality impact induced by the construction work	Contractor	Work Site	Construction Stage	ProPECC PN1/94; Water Pollution Control Ordinance

Project Profile Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concerns to address	Implementation Parties	Location of the measure	When to implement the measure	Relevant requirements or standards for the measure to achieve
	 Any foul effluent should not be discharged into any public sewer and stormwater drain, unless an effluent discharge permit is obtained under the WPCO by the Contractor. Site toilet facilities, if needed, should be chemical toilets or should have the foul water effluent directed to a foul sewer. 					
	Waste Management					
S.3.4	 Construction Waste Management Measures Excavated material should be reused on site as far as possible to minimise off-site disposal. Scrap metals or abandoned equipment should be recycled if possible. Waste arising should be kept to a minimum and be handled, transported and disposed of in a suitable manner. The Contractor should adopt a trip ticket system for the disposal of C&D materials to any designated public filling facility and/or landfill. Independent audits of the Contractor and resident site staff will be undertaken to ensure that the correct procedures are being followed. Chemical waste shall be handled in accordance with the Code of Practice on the Packaging, Handling and Storage of Chemical Wastes. All general refuse should be segregated and stored in enclosed bins or compaction units and waste separation facilities for paper, aluminium cans, plastic bottles etc. should be provided to facilitate reuse or 	To adopt waste management measures in the way of avoiding, minimising, reusing and recycling so as to reduce waste generation	Contractor	Work Site	Construction Stage	Waste Disposal Ordinance (Cap. 54); Waste Disposal (Chemical Waste) (General) Regulation; ETWB TCW No. 31/2004; ETWB TCW No. 19/2005.

APPENDIX E

STATUS OF ENVIRONMENTAL LICENSES AND PERMITS



Contract No. C3840-13C Tsim Sha Tsui Station Carnarvon Road Subway

Licence Summary

ltem No.	Our Ref.	Govt. Ord.	Type? (License / Permit / Account / Notification / Registration & etc.)	Description	Submission	Ref. No	Date of Submission (to EPD) (DD-MM-YYYY)	Date of Approval / Receipt (from EPD) (DD-MM-YYYY)	Date of Activation (DD-MM-YYYY)	Date of Expiry (DD-MM-YYYY) Green = expire next mth; Yellow = expire this wk; Red = Expired	Description	Remarks
000	000	EIAO	Permit	Environmental Permit	N/A	AEP-440/2012	N/A	N/A	18 - 07 - 2012	N/A	Baseline, Air & Noise Impact Monitoring	
001	APCO #002	APCO	Notification	Construction Dust Notification	Form NB – Notification S3(3) of APCO (Construction Dust)	403252	27 - 05 - 2016	02 - 06 - 2016	01 - 02 - 2014	31 - 10 - 2017	Demolition of a Building	Change of anticipated date of completed is notified
001	APCO #002	APCO	Notification	Construction Dust Notification	Form NB – Notification S3(3) of APCO (Construction Dust)	403252	27 - 05 - 2016	02 - 06 - 2016	01 - 08 - 2014	31 - 08 - 2018	Work carried out in any part of a tunnel that is within 100m of any exit to the open air	Change of anticipated date of completed is notified
001	APCO #002	APCO	Notification	Construction Dust Notification	Form NB – Notification S3(3) of APCO (Construction Dust)	403252	27 - 05 - 2016	02 - 06 - 2016	01 - 01 - 2016	31 - 08 - 2018	Construction of the Superstructure of a Building	Change of anticipated date of completed is notified
001	APCO #002	APCO	Notification	Construction Dust Notification	Form NB – Notification S3(3) of APCO (Construction Dust)	403252	27 - 05 - 2016	02 - 06 - 2016	01 - 11 - 2016	28 - 02 - 2019	Road Construction Work	Change of anticipated date of completed is notified
002	APCO #002	WDO	Account	Construction Waste Billing Account	EPD-211 (Form 1) Application for a Billing Account for Disposal of Construction Waste	7018523	18 - 10 - 2013	25 - 10 - 2013	25 - 10 - 2013	N/A	Disposal of C&D Waste	Application No. WFG12765
003	WPCO #002	WPCO	Licence	Water Discharge Licence	EPD-117 (Form A) Application for a Licence of Water Discharge	WT00019722-2014	24 - 07 - 2014	01 - 09 - 2014	01 - 09 - 2014	31 - 03 - 2019	Quarterly Report FlowRate 25m3/d, pH 6-9, SS 30mg/L, COD 80mg/L	
004	CWP #001	WDO	Registration	Chemical Waste Producer	EPD-129 Application for Registration as a Chemical Waste Producer	5213-2214-M2446-16	15 - 01 - 2014	04 - 03 - 2014	04 - 03 - 2014	N/A	Surplus paint, spent lubrucating oil, spent battery	
005	CNP#007	NCO	Permit	Construction Noise Permit	EPD74A(s) Form 1 - Application for a Construction Noise Permit		18 - 01 - 2017	06 - 02 - 2017	15 - 02 - 2017	14 - 08 - 2017	Apply for 4nos Submersible Water pump (Electric) w/ whole site area	

APPENDIX F

EVENT AND ACTION PLAN

Event and Action Plan for Air Quality

In case the Action and Limit Levels are not complied during construction stage, the Event and Action Plan shown below should be followed.

Event / Action	ET	IEC	ER	Contractor
Action Level Exceedance for one sample	 Identify source; If valid, inform IEC and ER; Repeat measurement to confirm finding; Increase monitoring frequency to daily. 	 Check monitoring data submitted by ET; Check Contractor's working method. 	1. Notify Contractor	 Rectify any unacceptable practice; Amend working methods if appropriate
Exceedance for two or more consecutive samples	 Identify source; Inform IEC and EPD; Repeat measurements to confirm findings; Increase monitoring frequency to daily; Discuss with IEC and Contractor on remedial action required; If exceedance continues, arrange meeting with IEC and ER; If exceedance stops, cease additional monitoring. 	 Check monitoring data submitted by ET; Check Contractor's working method; Discuss with ET and Contractor on possible remedial measures; Advise the ER on the effectiveness of the proposed remedial measures; Supervise implementation of remedial measures. 	 Confirm receipt of notification of failure in writing; Notify Contractor; Ensure remedial measure properly implemented. 	 Submit proposals for remedial action to IEC within 3 working days of notification; Implement the agreed proposals; Amend proposal if appropriate.
Limit Level Exceedance for one sample	 Identify source; Inform ER and EPD; Repeat measurement to confirm finding; Increase 	 Check monitoring data submitted by ET; Check Contractor's working 	 Confirm receipt of notification of failure in writing; Notify Contractor; Ensure remedial 	 Take immediate action to avoid further exceedance; Submit proposals for remedial actions to IEC

Action	ET	IEC	ER	Contractor
	monitoring frequency to daily; 5. Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results.	 method; 4. Discuss with ET and the Contractor on possible remedial measures; 5. Advise the ER on the effectiveness of the proposed remedial measures; 6. Supervise implementation of remedial measures. 	measures properly implemented.	within 3 worki days of notification; 3. Implement the agreed proposals; 4. Amend proposal if appropriate.
Exceedance for two or more consecutive samples	 Notify IEC, ER, Contractor and EPD; Identify sources; Repeat measurement to confirm findings; Increase monitoring frequency to daily; Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented; Arrange meeting with IEC and ER to discuss the remedial actions to be taken; Assess the effectiveness of Contractor's remedial actions and keep IEC, EPD and ER 	 Discuss amongst ER, ET and Contractor on the potential remedial actions; Review Contractor's remedial actions whenever necessary to assure their effectiveness and advise the ET accordingly. Supervise the implementation of remedial measures. 	 Confirm receipt of notification of failure in writing; Notify Contractor; In consultation with IEC, agree with the Contractor on the remedial measures to be implemented; Ensure remedial measures properly implemented; If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated. 	 Take immedia action to avoi further exceedance; Submit proposals for remedial actions to IEC within 3 work days of notification; Implement th agreed proposals; Resubmit proposals if problem still r under control Stop the relevant porti of works as determined b the ER until ti exceedance i abated.

Event / Action	ET	IEC	ER	Contractor	
	results;				
	8. If exceedance stops, cease additional monitoring.				

Event and Action Plan for Construction Noise

In case the Action and Limit Levels are not complied during the construction stage, the Event and Action Plan shown below should be followed.

 Notify IEC and Contractor. Carry out investigation. Report the results of investigation to 	 Review the analyzed result submitted by ET. Review the proposed remedial 	 Confirm receipt of notification of exceedance Notify Contractor 	1. Submit noise mitigation proposals to IEC
 the IEC and Contractor. 4. Discuss with the Contractor and formulate remedial measures 5. Increase monitoring frequency to check mitigation effectiveness. 	measures by the Contractor and advise the ER accordingly.3. Supervise the implementation of remedial measures.	 Require Contractor to propose remedial measures for the analysed noise problem Ensure remedial measures are properly implemented. 	2. Implement noise mitigation proposals
 Notify IEC, ER, EPD and Contractor, and follow other actions Identify source Repeat measurement to confirm findings Increase monitoring frequency Check Contractor's working procedures to determine possible mitigation to be implemented Inform IEC, ER and EPD the causes and actions taken for the exceedances Assess 	 Discuss amongst ER, ET and Contractor on the potential remedial actions Review Contractor's remedial actions whenever necessary to assure their effectiveness and advise the ET accordingly Supervise the implementation of remedial measures 	 Confirm receipt of notification of exceedances Notify Contractor Require Contractor to propose remedial measures Ensure remedial measures are properly implemented If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated. 	 Take immediate action to avoid further exceedance Submit proposals for remedial actions to IEC within 3 working days of notifications Implement the agreed proposals Revise and resubmit proposals if problem still not under control Stop the relevant portion of works as determined by the ER until the exceedance is abated
	Contractor. 4. Discuss with the Contractor and formulate remedial measures 5. Increase monitoring frequency to check mitigation effectiveness. 1. Notify IEC, ER, EPD and Contractor, and follow other actions 2. Identify source 3. Repeat measurement to confirm findings 4. Increase monitoring frequency 5. Check Contractor's working procedures to determine possible mitigation to be implemented 6. Inform IEC, ER and EPD the causes and actions taken for the exceedances	 Contractor. Discuss with the Contractor and formulate remedial measures Increase monitoring frequency to check mitigation effectiveness. Notify IEC, ER, EPD and Contractor, and follow other actions Identify source Repeat measurement to confirm findings Increase monitoring frequency Increase monitoring Repeat measurement to confirm findings Increase monitoring frequency Increase monitoring Supervise the implementation of remedial measures. Identify source Repeat measurement to confirm findings Increase monitoring frequency Check Contractor's working procedures to determine possible mitigation to be implemented Inform IEC, ER and EPD the causes and actions taken for the exceedances Assess effectiveness of 	 Contractor. 4. Discuss with the Contractor and formulate remedial measures 5. Increase monitoring frequency to check mitigation effectiveness. 1. Notify IEC, ER, EPD and Contractor, and follow other actions 2. Identify source 3. Repeat monitoring frequency 4. Increase monitoring frequency 3. Repeat monitoring frequency 4. Increase monitoring frequency 5. Check Contractor's remedial actions 4. Increase monitoring frequency 5. Check Contractor's monitoring frequency 6. Inform IEC, ER and Effectiveness and actions taken for the exceedances 7. Assess effectiveness of

Event / Action	ET	IEC	ER	Contractor	
	remedial actions and keep IEC, EPD, ER informed of the results				
	8. If exceedance stops, cease additional monitoring				

APPENDIX G

MONITORING SCHEDULE

		Environment	al Monitoring & Au	udit Schedule		
			June 2017			
Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
				1	2	3
				24-hr TSP		
				Noise		
4	5	6	7	8	9	10
	24-hr TSP	Noise				
		Weekly Site Audit				
11	12	13	14	15	16	17
	24-hr TSP		Noise			
		Weekly Site Audit				
18	19	20	21	22	23	24
10	19	20	21	22	23	24
	24-hr TSP			Noise		
		Weekly Site Audit				
25	26	27	28	29	30	
25	20	۷.	20	LJ	50	
	24-hr TSP	Noise				
		Weekly Site Audit				
This schedule may be subi	ect to change due to unexpe	ected circumstances (e.g. ad	dverse weather)		1	

		Environment	tal Monitoring & A	udit Schedule					
July 2017									
Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday			
						1			
2	3	4	5	6	7	8			
	24-hr TSP	Noise							
		Weekly Site Audit							
9	10	11	12	13	14	15			
	24-hr TSP	Noise							
		Weekly Site Audit							
16	17	18	19	20	21	22			
	24-hr TSP	Noise							
		Weekly Site Audit							
23	24	25	26	27	28	29			
	24-hr TSP	Noise							
		Weekly Site Audit							
30	31								
is schedule mav be su	bject to change due to unexp	pected circumstances (e.g. a	dverse weather)						

APPENDIX H

WEATHER INFORMATION EXTRACTED FROM HK OBSERVATORY


	Daily Total Ra	ainfall at Kir	ng's Parl	k HKO Weather Monitoring Station - June 2017
Day	Total Rainfall, mm	24-hr TSP	Noise	Remarks
1	Trace	✓	~	The weather was fine without rainfall on site during noise monitoring.
2	Trace			
3	-			
4	Trace			
5	Trace	✓		
6	Trace		~	The weather was fine without rainfall on site during noise monitoring.
7	4.3			
8	-			
9	1.1			
10	Trace			
11	Trace			
12	37.7	✓		
13	219.4			
14	15.6		~	The weather was fine without rainfall on site during noise monitoring.
15	14.5			
16	13.5			
17	138.0			
18	24.2			
19	32.6	✓		
20	24.8			
21	95.9			
22	Trace		✓	The weather was fine without rainfall on site during noise monitoring.
23	10.5			
24	18.3			
25	4.2			
26	0.1	1		
27	1.3		~	The weather was fine without rainfall on site during noise monitoring.
28	-			
29	-			
30	-			
Mean/Total	656.0			


King's Park Weather Station – 01 June 2017




Temperature/Humidity:

Wind Direction:

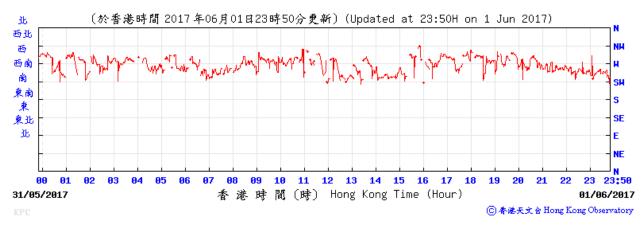

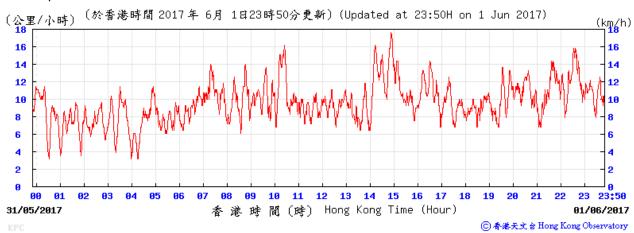



King's Park Weather Station – 05 June 2017

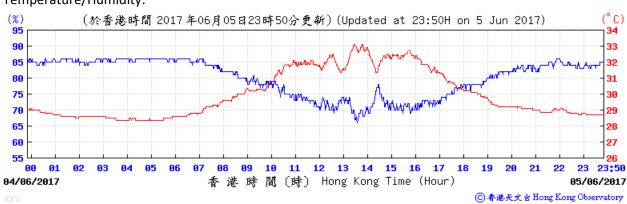

Temperature/Humidity:

Wind Direction:

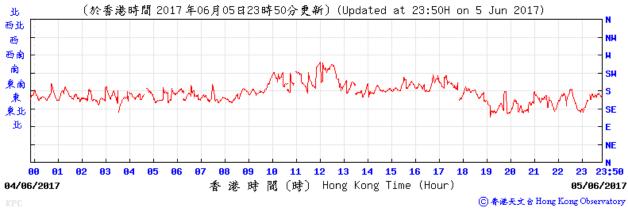

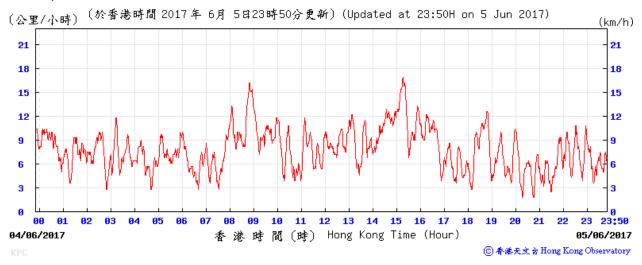


King's Park Weather Station – 06 June 2017

Temperature/Humidity:



Wind Direction:

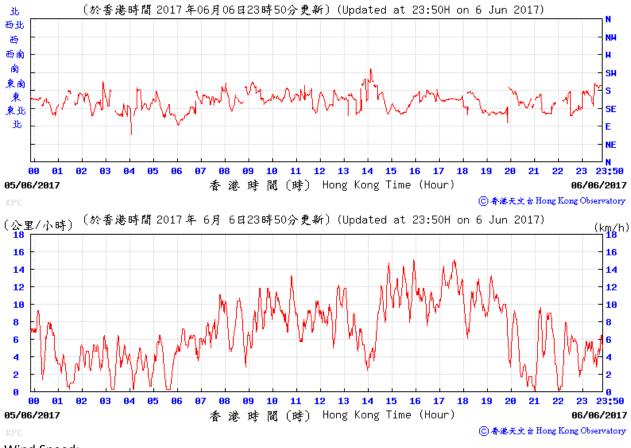


King's Park Weather Station – 12 June 2017




Wind Direction:



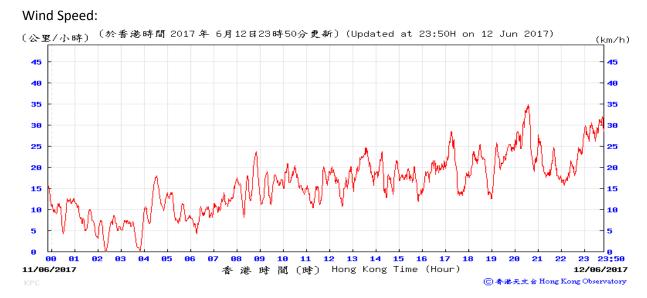

King's Park Weather Station – 14 June 2017

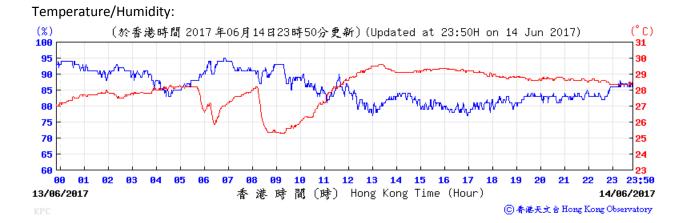


Wind Direction:






King's Park Weather Station – 19 June 2017

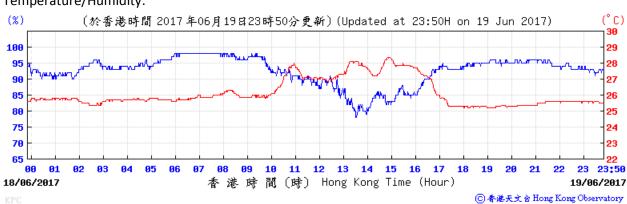


Temperature/Humidity:

Wind Direction:

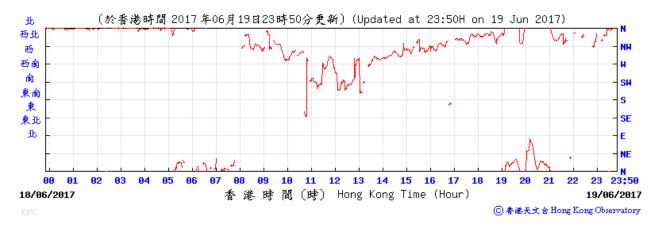





King's Park Weather Station – 22 June 2017

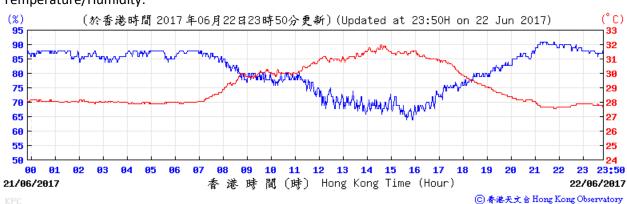


Temperature/Humidity:

Wind Direction:

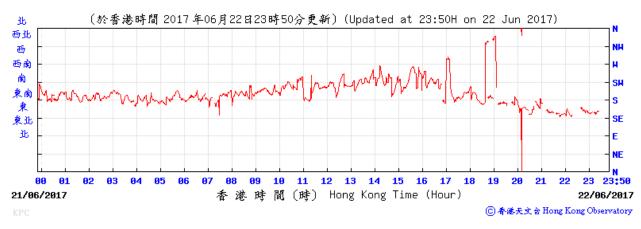

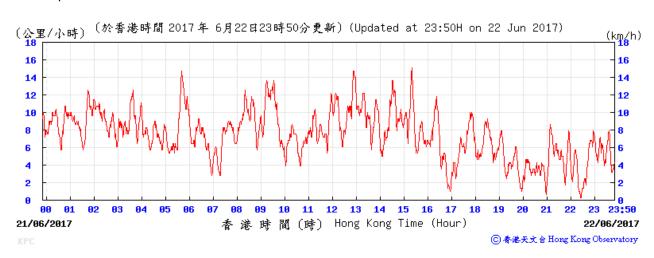



King's Park Weather Station – 26 June 2017

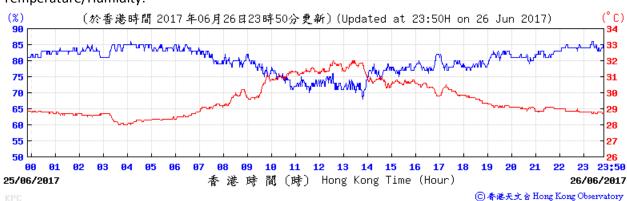


Temperature/Humidity:

Wind Direction:

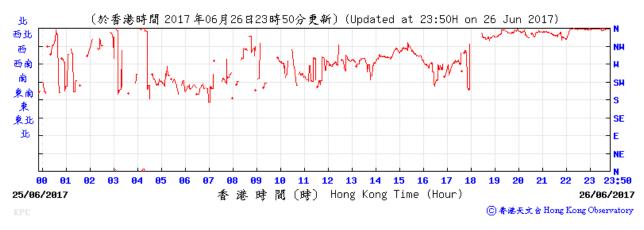

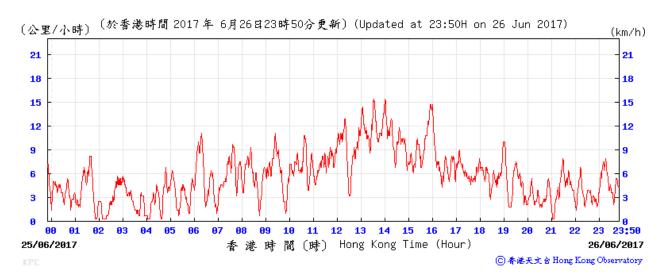


King's Park Weather Station – 27 June 2017

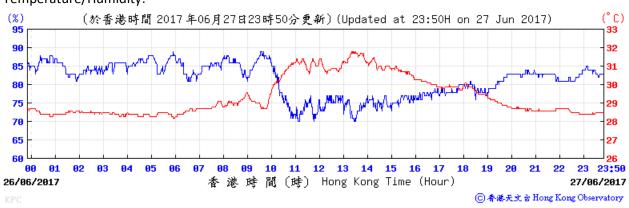

Temperature/Humidity:

Wind Direction:

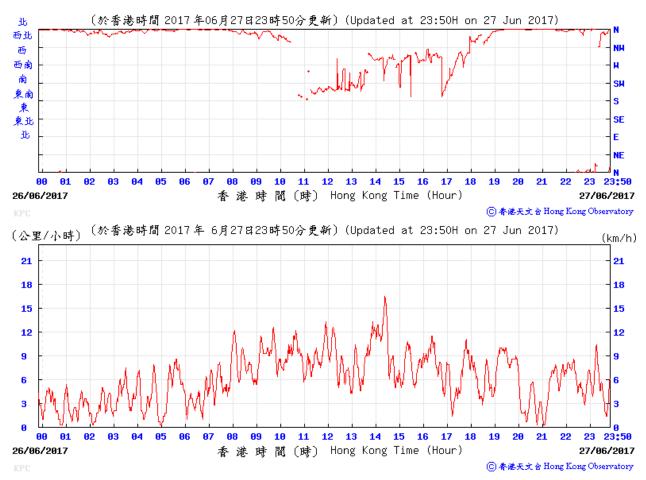

APPENDIX I CERTIFICATE OF LABORATORY AND EQUIPMENT CALIBRATION



TISCH ENVIRONMENTAL, INC. 145 SOUTH MIAMI AVE VILLAGE OF CLEVES, OH 45002 513.467.9000 877.263.7610 TOLL FREE 513.467.9009 FAX

OF	RIFICE TRAN	SFER STAN	IDARD CERTI	FICATION	WORKSHEET	FE-5025A
Date - May 19, 2017 Rootsmeter S/N 0438320 Ta (K) - 296 Operator Tisch Orifice I.D 1785 Pa (mm) - 750.57						
OR S	TART	OLUME STOP (m3) NA NA NA NA NA	DIFF VOLUME (m3) 1.00 1.00 1.00 1.00 1.00	DIFF TIME (min) 1.3960 0.9790 0.8760 0.8390 0.6900	METER DIFF Hg (mm) 3.2 6.4 7.9 8.8 12.6	ORFICE DIFF H2O (in.) 2.00 4.00 5.00 5.50 8.00

DATA TABULATION

Vstd	(x axis) Qstd	(y axis)		Va	(x axis) Qa	(y axis)
0.9900 0.9858 0.9837 0.9826 0.9775	0.7092 1.0070 1.1230 1.1712 1.4167	1.4102 1.9943 2.2296 2.3385 2.8203		0.9957 0.9915 0.9894 0.9883 0.9832	0.7133 1.0128 1.1294 1.1779 1.4249	0.8881 1.2560 1.4042 1.4728 1.7762
Qstd slope (m) = 1.99748 intercept (b) = -0.00957 coefficient (r) = 0.99985 y axis = SQRT[H2O(Pa/760)(298/Ta			 [Qa slope intercept coefficie y axis =	= (b) =	1.25079 -0.00603 0.99985 Fa/Pa)]

CALCULATIONS

Vstd = Diff. Vol[(Pa-Diff. Hg)/760](298/Ta) Qstd = Vstd/Time

Va = Diff Vol [(Pa-Diff Hg)/Pa] Qa = Va/Time

For subsequent flow rate calculations:

 $Qstd = 1/m\{[SQRT(H2O(Pa/760)(298/Ta))] - b\}$ $Qa = 1/m\{[SQRT H2O(Ta/Pa)] - b\}$



built assets 4/F Roof top, K11 Commercial Complex

Location.	4/F Kool top, KTT Commercial Complex		
Sampler and Serial No.	TE-5170 MFC (0462)		
Calibration Date and Time :	4/6/2017, 15:00 p.m.		
Operator	WONG Fu Nam		
Operator :	Tisch		
Model :	TE-5025A		
Calibrator Orifice no.:	1785		
Slope (m):	2.00462		
Intercept (b):	-0.02664		
Date Certified : 2-May-16			

Standard Pressure (Pstd)	298.00 K
Standard Temperature (Tstd)	293.00 K
Ambient Pressure (Pa)	760.00 mmHg
Ambient Temperature (Ta)	759.80 mmHg

Sample no.	H₂O (in)	Qstd (m³/min)	I (Flow Chat)	IC (corrected)
1	11.5	1.719	55	55.93
2	9.6	1.572	51	51.86
3	7.7	1.409	43	43.73
4	5.1	1.149	33	33.56
5	3.3	0.927	21	21.36

Linear Regression	
Slope =	43.819
Intercept =	-18.099
Correlation Coefficient =	0.9925

Calibrations

Qstd = 1/m[Sqrt(H2O(Pa/Pstd)(Tstd/Ta))-b] IC = I[Sqrt((Pa/Pstd)(Tstd/Ta))]

Qstd = actual flow rate as indicticated by the calibrator orifice H2O = orifice manometer reading during calibration Ta = ambient temperature during calibration, K = 273 + °C

Tstd = standard temperature, a constant that never changes, 298 K

Pa = ambient barometric pressure during calibration, mmHg

Pstd = standard barometric pressure, a constant that never changes, 760 mm Hg

m = Qstandard slope of orifice calibrator relationship


b = Qstandard intercept of orifice calibrator relationship

IC = continuous flow recorder readings corrected to current Ta and Pa

I = continuous flow recorder readings during calibration

Plot of Linear Regression Actual flow rate (Qstd) against Flow indication (I)



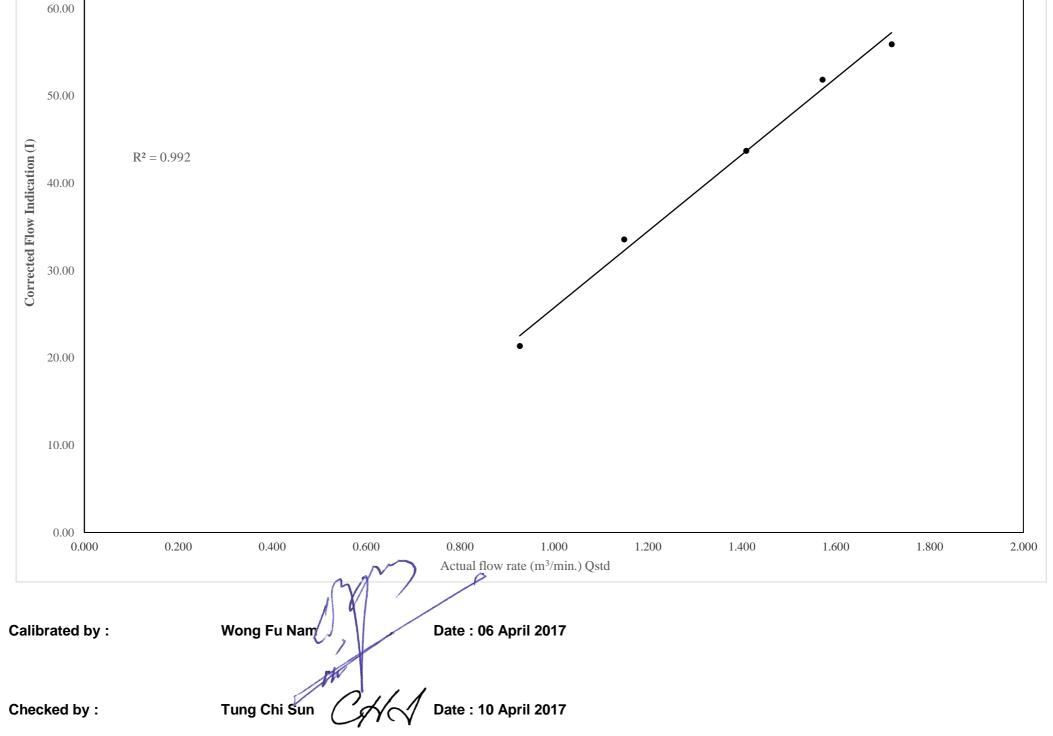



Location :	4/F Roof top, K11 Commercial Complex		
Sampler and Serial No.	TE-5170 MFC (0462)		
Calibration Date and Time :	8 June 2017, 14:15 p.m.		
Operator	WONG Fu Nam		
Operator :	Tisch		
Model :	TE-5025A		
Calibrator Orifice no.:	1785		
Slope (m): 1.99748			

	1.667 16
Intercept (b):	-0.00957
Date Certified :	19-May-17

Standard Pressure (Pstd)	298.00 K
Standard Temperature (Tstd)	304.00 K
Ambient Pressure (Pa)	760.00 mmHg
Ambient Temperature (Ta)	757.10 mmHg

Sample no.	H₂O (in)	Qstd (m³/min)	I (Flow Chat)	IC (corrected)
1	10.7	1.623	54	52.83
2	8.3	1.430	47	45.98
3	6.4	1.256	39	38.16
4	4.7	1.077	31	30.33
5	3.2	0.890	20	19.57

Linear Regression	
Slope =	45.165
Intercept =	-19.322
Correlation Coefficient =	0.9926

Calibrations

Qstd = 1/m[Sqrt(H2O(Pa/Pstd)(Tstd/Ta))-b] IC = I[Sqrt((Pa/Pstd)(Tstd/Ta))]

Qstd = actual flow rate as indicticated by the calibrator orifice H2O = orifice manometer reading during calibration Ta = ambient temperature during calibration, K = 273 + °C

Tstd = standard temperature, a constant that never changes, 298 K

Pa = ambient barometric pressure during calibration, mmHg

Pstd = standard barometric pressure, a constant that never changes, 760 mm Hg

m = Qstandard slope of orifice calibrator relationship

b = Qstandard intercept of orifice calibrator relationship


IC = continuous flow recorder readings corrected to current Ta and Pa

I = continuous flow recorder readings during calibration

Plot of Linear Regression Actual flow rate (Qstd) against Flow indication (I)



y = 45.165x-19.322

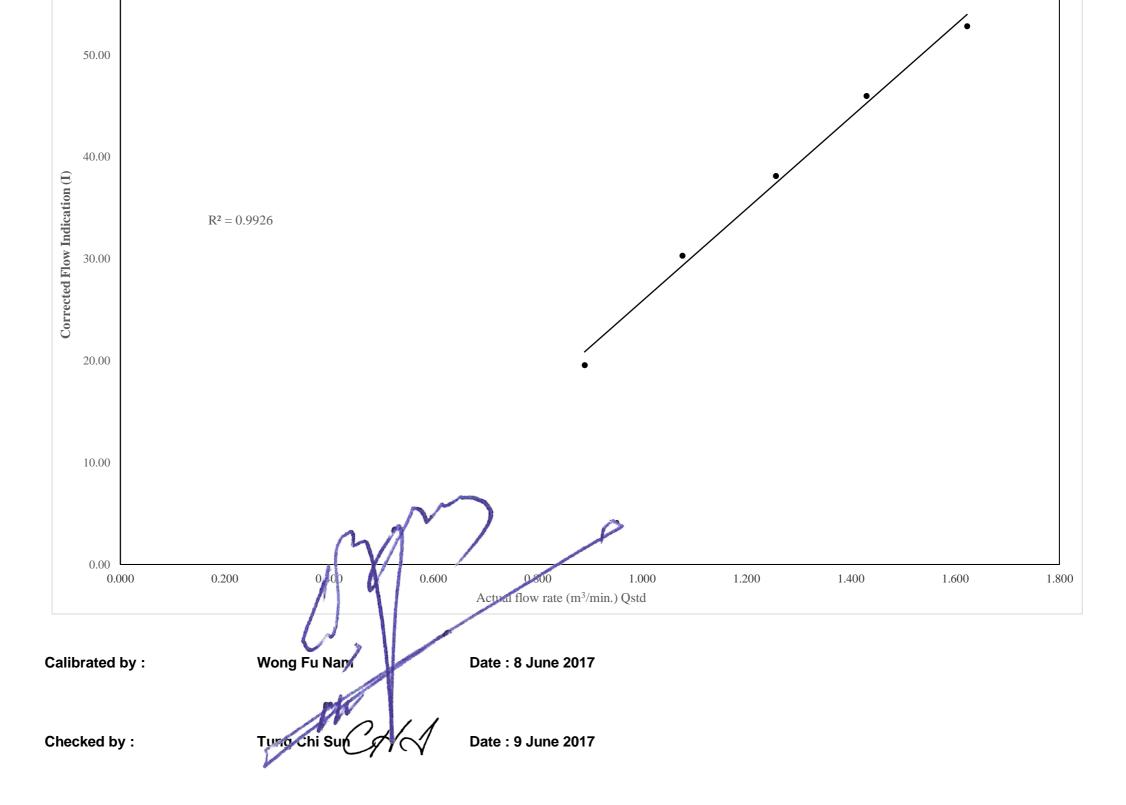

ALS Technichem (HK) Pty Ltd

ALS Laboratory Group

ANALYTICAL CHEMISTRY & TESTING SERVICES

SUB-CONTRACTING REPORT



CONTACT	E FU NAM WONG	WORK ORDER	HK1710103	
CLIENT	ARCADIS DESIGN & ENGINEERING LIMITED			
ADDRESS	: 20/F AXA TOWER,	SUB-BATCH	: 1	
	LANDMARK EAST, 100 HOW MING STREET,	DATE RECEIVED	: 9-MAR-2017	
	KWUN TONG HONG KONG	DATE OF ISSUE	: 28-MAR-2017	
PROJECT	:	NO. OF SAMPLES	: 1	
		CLIENT ORDER	·	

General Comments

- Sample(s) were received in ambient condition.
- Sample(s) analysed and reported on an as received basis.
- Calibration was subcontracted to and analysed by Action United Environment Services and Consulting.

Signatories

This document has been signed by those names that appear on this report and are the authorised signatories.

	Signatories	Position
PP	Richard Fung	General Manager

This is the Final Report and supersedes any preliminary report with this batch number. Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release.

> ALS Technichem (HK) Pty Ltd Part of the ALS Laboratory Group

11/F. Chung Shun Knitting Centre 1 - 3 Wing Yip Street Kwai Chung N.T. Hong Kong Tel. +852 2610 1044 Fax. +852 2610 2021 www.alsglobal.com WÖRK ORDER : | SUB-BATCH :

4 ¥ *

CLIENT PROJECT : HK1710103

: ----

: 1 : ARCADIS DESIGN & ENGINEERING LIMITED



ALS Lab ID	Client's Sample ID	Sample Type	Sample Date	External Lab Report No.
HK1710103-001	S/N: 456677	AIR	09-MAR-2017	S/N: 456677

Equipment Verification Report (TSP)

Equipment Calibrated:

Type:	Laser Dust monitor			
Manufacturer:	lanufacturer: Sibata LD-3B			
Serial No. 456677				
Equipment Ref:	Nil			
Job Order	HK1710103			

Standard Equipment:

Standard Equipment:	Higher Volume Sampler
Location & Location ID:	AUES office (calibration room)
Equipment Ref:	HVS 018
Last Calibration Date:	23 February 2017

Equipment Verification Results:

Testing Date:


16 March 2017

Hour	Time	Mean Temp °C	Mean Pressure (hPa)	Concentration in mg/m ³ (Standard Equipment)	Total Count (Calibrated Equipment)	Count/Minute (Total Count/60min)
2hr02min	09:58 ~ 12:00	17.8	1016.4	0.037	4070	33.4
2hr07min	12:05 ~ 14:12	17.8	1016.4	0.031	3678	28.9
2hr02min	14:20 ~ 16:22	17.8	1016.4	0.026	3451	28.2

Linear Regression of Y or X

Slope (K-factor):	
Correlation Coefficient	
Date of Issue	

0.0010	
0.9882	
20 March 2017	

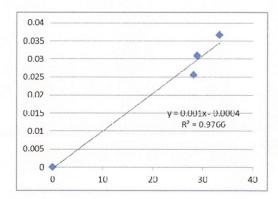

Remarks:

1. **Strong** Correlation (R>0.8)

2. Factor 0.0010 should be apply for TSP monitoring

*If R<0.5, repair or re-verification is required for the equipment





Certificate No. 702493	Page 1 of 2 Pages
Customer : ARCADIS Design & Engineering Limited	
Address : 20/F, AXA Tower, Landmark East, 100 How Ming Street, K	wun Tong, Kowloon, Hong Kong.
	of receipt : 17-Mar-17
Item Tested	· · ·
Description : Precision Acoustic Calibrator	
Manufacturer : Larson Davis I.D.	:
Model : CAL200 Serial	No. : 10929
Test Conditions	
Date of Test : 20-Mar-17 Suppl	y Voltage :
	ve Humidity : (50 ± 25) %
Test Specifications	
Calibration check.	
Ref. Document/Procedure : IEC 60942, F20, Z02.	
Test Results	
All results were within the IEC 60942 Class 1 specification. The results are shown in the attached page(s).	
Main Test equipment used:	
Equipment No. Description Cert. No.	Traceable to
S014 Spectrum Analyzer 605758	NIM-PRC & SCL-HKSAR
S240 Sound Level Calibrator 701036	NIM-PRC & SCL-HKSAR
S041 Universal Counter 607883	SCL-HKSAR
S206 Sound Level Meter 605757	SCL-HKSAR

The values given in this Calibration Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environmental changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Hong Kong Calibration Ltd. shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration are traceable to International System of Units (SI), or by reference to a natural constant. The test results apply to the above Unit-Under-Test only

Calibrated by :Kin Wong	Approv	ved by :	Steve Kwan
This Certificate is issued by: Hong Kong Calibration Ltd. Unit 8B, 24/F., Well Fung Industrial Centre, No. 58-76, Ta Chuen Ping Street,Kwai Chung, NT,Hong Ko Tel: 2425 8801 Fax: 2425 8646	Date:	20-Mar-17	

The copyright of this certificate is owned by Hong Kong Calibration Ltd.. It may not be reproduced except in full.



Certificate No. 702493

Page 2 of 2 Pages

Results :

1. Generated Sound Pressure Level

UUT Nominal Value (dB)	Measured Value (dB)	IEC 60942 Class 1 Spec.
94	93.8	± 0.4 dB
114	113.8	

Uncertainty : $\pm 0.1 \text{ dB}$

Short-term Level Fluctuation : 0.0 dB IEC 60942 Class 1 Spec. : ± 0.1 dB Uncertainty : ± 0.01 dB

3. Frequency

UUT Nominal Value (kHz)	Measured Value (kHz)	IEC 60942 Class 1 Spec.
1	1.000	±1%

Uncertainty : \pm 3.6 x 10 ⁻⁶

4. Total Distortion : < 0.5 % IEC 60942 Class 1 Spec. : < 3 % Uncertainty : ± 2.3 % of reading

Remark : 1. UUT : Unit-Under-Test

- 2. The uncertainty claimed is for a confidence probability of not less than 95%.
- 3. Atmospheric Pressure : 1023 hPa.

----- END -----



Certificate No.	702990		Page	1 of 3	Pages
Customer :	Hyder Consulting Limited				
Address : 2	20/F, AXA Tower, Landmark Eas	st, 100 How Ming St	treet, Kwun Tong	, HK	
Order No. :	Q71166		Date of receipt	:	30-Mar-17
Item Tested					
Description : S	Sound Level Meter				
Manufacturer :	B&K		I.D.	:	
Model : 2	2238		Serial No.	: 256278	2
Test Conditio	ons				
Date of Test :	6-Apr-17		Supply Voltage	:	
Ambient Tempe	rature : (23 ± 3)°C		Relative Humid		5) %
Test Specific	ations				
Calibration check Ref. Document/P	k. Procedure: Z01, IEC 60651, IEC	60804.			
Test Results					
All results were w	vithin the IEC 60651 Type1 and I	EC 60804 Type1 sr	ecification		
	hown in the attached page(s).				
Main Test equipm	nent used:				
Equipment No.	Description	<u>Cert. No.</u>		Traceable to	
S017 N	Aulti-Function Generator	C170120		SCL-HKSAR	R
S240 S	Sound Level Calibrator	701036		NIM-PRC &	SCL-HKSAR
The values given in th	his Calibration Certificate only relate to th	ne values measured at th	ne time of the test and	d any uncertaint	ies quoted
ovenoaulity, mis-manu	nce for the equipment long term drift, va lling, or the capability of any other labora e resulting from the use of the equipment	atory to repeat the meas	urement. Hong Kong	n and snock dur g Calibration Ltd	ing transportation, I. shall not be liable

The test equipment used for calibration are traceable to International System of Units (SI), or by reference to a natural constant. The test results apply to the above Unit-Under-Test only

Calibrated by :	Approv	ved by : _	Steve Kwan
This Certificate is issued by: Hong Kong Calibration Ltd. Unit 8B, 24/F., Well Fung Industrial Centre, No. 58-76, Ta Chuen Ping Street,Kwai Chung, NT,Hong Ko Tel: 2425 8801 Fax: 2425 8646	Date:	6-Apr-17	

The copyright of this certificate is owned by Hong Kong Calibration Ltd.. It may not be reproduced except in full.



Certificate No. 702990

Page 2 of 3 Pages

Results :

1. SPL Accuracy

	UU	T Setting		Applied Value	UUT Reading
Range	Freq. Wgt.	Bandwith	Center Freq.	(dB)	(dB)
20~100	A	BB/F		94.0	94.0
	A	BB/S			94.0
	С	BB/F			94.0
40~120	A	BB/F		94.0	94.0
	A	BB/F		114.0	114.1

IEC 60651 Type 1 Spec. : \pm 0.7 dB Uncertainty : \pm 0.1 dB

 Level Stability : 0.0 dB IEC 60651 Type 1 Spec. : ± 0.3 dB Uncertainty : ± 0.1 dB

3. Linearity

3.1 Level Linearity

UUT Range	Applied	UUT Reading	Variation	IEC 60651 Type 1 Spec.
(dB)	Value (dB)	(dB)	(dB)	(Primary Indicator Range)
140	114.0	114.0	0.0	± 0.7 dB
130	104.0	104.0	0.0	
120	94.0	94.0 (Ref.)		
110	84.0	84.0	0.0	
100	74.0	74.0	0.0	
90	64.0	64.0	0.0	
80	54.0	54.0	0.0	

 $Uncertainty:\pm 0.1 \ dB$



Certificate No. 702990

Page 3 of 3 Pages

3.2 Differential level linearity

UUT Range	Applied	UUT Reading		IEC 60651 Type 1
(dB)	Value (dB)	(dB)	Variation (dB)	Spec.
120	84.0	84.0	0.0	± 0.4 dB
	94.0	94.0 (Ref.)		
	95.0	95.0	0.0	± 0.2 dB

Uncertainty : $\pm 0.1 \text{ dB}$

4. Frequency Weighting

A weighting

Frequency	Attenuation (dB)	IEC 60651 Type 1 Spec.
31.5 Hz	-39.3	$- 39.4 \text{ dB}, \pm 1.5 \text{ dB}$
63 Hz	-26.2	- 26.2 dB, ± 1.5 dB
125 Hz	-16.2	- 16.1 dB, ± 1 dB
250 Hz	-8.7	- $8.6 \text{ dB}, \pm 1 \text{ dB}$
500 Hz	-3.3	- $3.2 \text{ dB}, \pm 1 \text{ dB}$
1 kHz	0.0 (Ref)	$0 \text{ dB}, \pm 1 \text{ dB}$
2 kHz	+1.2	$+ 1.2 \text{ dB}, \pm 1 \text{ dB}$
4 kHz	+1.0	$+ 1.0 \text{ dB}, \pm 1 \text{ dB}$
8 kHz	-1.2	- 1.1 dB, + 1.5 dB ~ -3 dB
16 kHz	-6.7	- $6.6 dB, + 3 dB \sim -\infty$

Uncertainty : $\pm 0.1 \text{ dB}$

5. Time Averaging

Applied Burst duty Factor	Applied Leq Value (dB)	UUT Reading (dB)	IEC 60804 Type 1 Spec.
continuous	40.0	40.0	
1/10	40.0	39.8	± 0.5 dB
1/10 ²	40.0	39.8	-
1/103	40.0	39.8	± 1.0 dB
1/10 ⁴	40.0	39.9	

Uncertainty : $\pm 0.1 \text{ dB}$

Remarks : 1. UUT : Unit-Under-Test

- 2. The uncertainty claimed is for a confidence probability of not less than 95%.
- 3. Atmospheric pressure : 1 025 hPa.
- 4. The UUT was adjusted with the laboratory's sound calibrator at the reference sound pressure level before the calibration.

----- END ------

APPENDIX J

SAMPLE DATA RECORD SHEET

Monitoring Location	4/F Roof top, K11	
Sampler Identification	TE-5170 MFC	
Start date & time of sampling		01 June 2017, 10:00 am
Elanaad tima Matar Daading	Start (Hours)	8167.17
Elapsed-time Meter Reading	Stop (Hours)	8192.33
Total Sampling Time (min.)	1509.6 (25.16 Hours)	
Weather Conditions		Fine
Abnormal Site Conditions		Nil
	Pi (mm Hg)	753.2
Initial Flow Pote Opi	Ti (°C)	29.2
Initial Flow Rate, Qsi	Hi (cfm)	24
	Qsi (Std. m ³)	0.96
	Pi (mm Hg)	753.1
Final Flow Data Oaf	Ti (°C)	29.5
Final Flow Rate, Qsf	Hf (cfm)	24
	Qsf (Std. m ³)	0.96
Average Flow Rate (Std. m ³)		0.96
Total Volume (Std. m ³)		1448
Filter Identification No.		201742
Initial Weight of Filter (g)		2.8859
Final Weight of Filter (g)		2.9473
Different Weight of Filter (g)		0.0614
Measured TSP Level (µg/m ³)		42.4
Action Level (µg/m ³)	221.6	
Limit Level (µg/m ³)	260.0	
Name & Designation	Date	Signature
Record by: Wong Fu Nam	13 June 2017	0,1
Checked by: Tung Chi Sun	13 June 2017	CHA

Monitoring Location		4/F Roof top, K11
Sampler Identification		TE-5170 MFC
Start date & time of sampling		05 June 2017, 10:38 a.m.
Elanaad tima Matar Booding	Start (Hours)	8192.33
Elapsed-time Meter Reading	Stop (Hours)	8215.03
Total Sampling Time (min.)		1362 (22.7 Hours)
Weather Conditions	Fine	
Abnormal Site Conditions		Nil
	Pi (mm Hg)	755.6
Initial Flow Data Oai	Ti (°C)	31.9
Initial Flow Rate, Qsi	Hi (cfm)	34
	Qsi (Std. m ³)	1.18
	Pi (mm Hg)	757.5
Final Flaw Data Oaf	Ti (°C)	32.1
Final Flow Rate, Qsf	Hf (cfm)	35
	Qsf (Std. m ³)	1.20
Average Flow Rate (Std. m ³)		1.19
Total Volume (Std. m ³)		1623
Filter Identification No.		2.1743
Initial Weight of Filter (g)		2.8543
Final Weight of Filter (g)		2.8894
Different Weight of Filter (g)		0.0351
Measured TSP Level (µg/m ³)		21.6
Action Level (µg/m ³)		221.6
Limit Level (µg/m ³)		260.0
Name & Designation	Date	Signature
Record by: Wong Fu Nam	13 June 2017	Mar -
Checked by: Tung Chi Sun	13 June 2017	CHA

Monitoring Location		4/F Roof top, K11
Sampler Identification		TE-5170 MFC
Start date & time of sampling		12 June 2017, 09:00 am
langed time Mater Deading	Start (Hours)	8215.03
lapsed-time Meter Reading	Stop (Hours)	8237.75
otal Sampling Time (min.)		1363.2 (22.72 Hours)
Veather Conditions	Rainy	
bnormal Site Conditions		Nil
	Pi (mm Hg)	754.2
nitial Flow Rate, Qsi	Ti (°C)	29.4
illiai filow Rale, QSI	Hi (cfm)	34
	Qsi (Std. m ³)	1.18
	Pi (mm Hg)	756
inal Flaw Data, Oaf	Ti (°C)	24.4
inal Flow Rate, Qsf	Hf (cfm)	35
	Qsf (Std. m ³)	1.20
verage Flow Rate (Std. m ³)		1.19
otal Volume (Std. m ³)		1624
ilter Identification No.		201744
nitial Weight of Filter (g)		2.8431
inal Weight of Filter (g)		2.8871
ifferent Weight of Filter (g)		0.0440
leasured TSP Level (µg/m ³)		27.1
ction Level (µg/m³)		221.6
imit Level (µg/m³)	260.0	
Name & Designation	Date	Signature
ecord by: Tung Chi Sun	28 June 2017	MCAN p
hecked by: Wong Fu Nam	28 June 2017	,
hecked by: Wong Fu Nam	28 June 2017	

Elapsed-time Meter Reading Total Sampling Time (min.) Weather Conditions Abnormal Site Conditions	Start (Hours) Stop (Hours) Pi (mm Hg)	TE-5170 MFC 19 June 2017, 08:52 am 8237.75 8262.59 1490.4 (24.84 Hours) Rainy
Elapsed-time Meter Reading Total Sampling Time (min.) Weather Conditions Abnormal Site Conditions	Stop (Hours)	8237.75 8262.59 1490.4 (24.84 Hours) Rainy
Elapsed-time Meter Reading Total Sampling Time (min.) Weather Conditions Abnormal Site Conditions	Stop (Hours)	8262.59 1490.4 (24.84 Hours) Rainy
Total Sampling Time (min.) Weather Conditions Abnormal Site Conditions		1490.4 (24.84 Hours) Rainy
Weather Conditions Abnormal Site Conditions Initial Flow Rate, Qsi	Pi (mm Hg)	Rainy
Abnormal Site Conditions	Pi (mm Hg)	-
Initial Flow Rate, Qsi	Pi (mm Hg)	A 191
Initial Flow Rate, Qsi	Pi (mm Hg)	Nil
Initial Flow Rate, Qsi		754.7
	Ti (°C)	25.9
	Hi (cfm)	34
(Qsi (Std. m³)	1.18
1	Pi (mm Hg)	754.7
	Ti (°C)	26
Final Flow Rate, Qsf	Hf (cfm)	35
(Qsf (Std. m ³)	1.20
Average Flow Rate (Std. m ³)		1.19
Total Volume (Std. m ³)		1776
Filter Identification No.		201745
Initial Weight of Filter (g)		2.8498
Final Weight of Filter (g)		2.9034
Different Weight of Filter (g)		0.0536
Measured TSP Level (µg/m ³)		30.2
Action Level (µg/m ³)		221.6
Limit Level (µg/m³)		260.0
Name & Designation	Date	Signature
Record by: Tung Chi Sun	28 June 2017	CHAN
Checked by: Wong Fu Nam	28 June 2017	

Monitoring Location	4/F Roof top, K11	
Sampler Identification	TE-5170 MFC	
Start date & time of sampling		26 June 2017, 09:30 am
Flowerd time Mater Deeding	Start (Hours)	8262.59
Elapsed-time Meter Reading	Stop (Hours)	8286.48
Total Sampling Time (min.)	1433.4 (23.89 Hours)	
Weather Conditions	Overcast	
Abnormal Site Conditions		Nil
	Pi (mm Hg)	756.9
Initial Flow Data Oai	Ti (°C)	29.6
Initial Flow Rate, Qsi	Hi (cfm)	34
	Qsi (Std. m ³)	1.18
	Pi (mm Hg)	757.5
Final Flow Pata, Oaf	Ti (°C)	29.5
Final Flow Rate, Qsf	Hf (cfm)	35
	Qsf (Std. m ³)	1.18
Average Flow Rate (Std. m ³)		1.18
Total Volume (Std. m ³)		1776
Filter Identification No.		201746
Initial Weight of Filter (g)		2.8442
Final Weight of Filter (g)		2.8878
Different Weight of Filter (g)		0.0436
Measured TSP Level (µg/m ³)	25.8	
Action Level (µg/m ³)	221.6	
Limit Level (µg/m ³)		260.0
Name & Designation	Date	Signature
Record by: Wong Fu Nam	03 July 2017	0,
Checked by: Tung Chi Sun	03 July 2017 📈	CHA

Monitoring Location		4/F Roof top, K11
Date of Monitoring		1 June 2017
Monitoring Start Time		10:09
Monitoring Stop Time		10:39
Measurement Time Length		30 mins
Weather Condition		Overcast
Wind Speed		3.9 m/s
Noise Meter Model (Serial Numbe	r)	BK 2238 (2562782)
Calibrator Model (Serial Number)		CAL 200 (10929)
	L _{eq}	69.2 dB(A)
Measurement Results	L ₁₀	71.5 dB(A)
	L ₉₀	66.0 dB(A)
Limit Level		75.0 dB(A)
Major Construction Noise Source(s) During Monitoring	On-site powered mechanical equipment
Other Noise Source(s) During Mo	nitoring	Traffic noise
Name & Designation	Date	Signature
Record by: Tung Chi Sun	01 June 2017	CHA
Checked by: Wong Fu Nam	01 June 2017	1 And a
		m

Monitoring Location		4/F Roof top, K11	
Date of Monitoring		06 June 2017	
Monitoring Start Time		10:14	
Monitoring Stop Time		10:44	
Measurement Time Length		30 mins	
Weather Condition		Sunny	
Wind Speed		0.1 m/s	
Noise Meter Model (Serial Number	r)	BK 2238 (2562782)	
Calibrator Model (Serial Number)		CAL 200 (10929)	
	L _{eq}	68.5 dB(A)	
Measurement Results	L ₁₀	70.0 dB(A)	
	L ₉₀	67.0 dB(A)	
Limit Level		75.0 dB(A)	
Major Construction Noise Source(s	s) During Monitoring	On-site powered mechanical equipment	
Other Noise Source(s) During Mor	nitoring	Traffic and Aircraft noise	
Name & Designation	Date	Signature	
Record by: Tung Chi Sun	06 June 2017	CHA	
Checked by: Wong Fu Nam	06 June 2017		
	1	THE	


Monitoring Location		4/F Roof top, K11	
Date of Monitoring		14 June 2017	
Monitoring Start Time		10:46	
Monitoring Stop Time		11:16	
Measurement Time Length		30 mins	
Weather Condition		Sunny	
Wind Speed		0.2 m/s	
Noise Meter Model (Serial Number	r)	BK 2238 (2562782)	
Calibrator Model (Serial Number)		CAL 200 (10929)	
	L _{eq}	69.8 dB(A)	
Measurement Results	L ₁₀	71.0 dB(A)	
-	L ₉₀	68.0 dB(A)	
Limit Level		75.0 dB(A)	
Major Construction Noise Source(s	s) During Monitoring	On-site powered mechanical equipment	
Other Noise Source(s) During Mor	litoring	Traffic noise	
Name & Designation	Date	Signature	
Record by: Tung Chi Sun	14 June 2017	CHA	
Checked by: Wong Fu Nam	14 June 2017	and a	
		File	


Monitoring Location		4/F Roof top, K11				
Date of Monitoring		22 June 2017				
Monitoring Start Time		10:06				
Monitoring Stop Time		10:36				
Measurement Time Length		30 mins				
Weather Condition		Sunny				
Wind Speed		0.3 m/s				
Noise Meter Model (Serial Number	r)	BK 2238 (2562782)				
Calibrator Model (Serial Number)		CAL 200 (10929)				
	L _{eq}	69.1 dB(A)				
Measurement Results	L ₁₀	69.5 dB(A)				
	L ₉₀	67.5 dB(A)				
Limit Level		75.0 dB(A)				
Major Construction Noise Source(s) During Monitoring	On-site powered mechanical equipment				
Other Noise Source(s) During Mor	nitoring	Traffic noise				
Name & Designation	Date	Signature				
Record by: Tung Chi Sun	22 June 2017	CHA				
Checked by: Wong Fu Nam	22 June 2017	1. L				
		THE				

Monitoring Location		4/F Roof top, K11				
Date of Monitoring		27 June 2017				
Monitoring Start Time		9:45				
Monitoring Stop Time		10:15				
Measurement Time Length		30 mins				
Weather Condition		Cloudy				
Wind Speed		2.5 m/s				
Noise Meter Model (Serial Number	r)	BK 2238 (2562782)				
Calibrator Model (Serial Number)		CAL 200 (10929)				
	L _{eq}	69.7 dB(A)				
Measurement Results	L ₁₀	70.5 dB(A)				
	L ₉₀	67.5 dB(A)				
Limit Level		75.0 dB(A)				
Major Construction Noise Source(s	s) During Monitoring	On-site powered mechanical equipment				
Other Noise Source(s) During Mor	itoring	Traffic noise				
Name & Designation	Date	Signature				
Record by: Wong Fu Nam	27 June 2017	M.				
Checked by: Tung Chi Sun	27 June 2017	CHA				

APPENDIX K

MONITORING RESULTS AND PLOTS

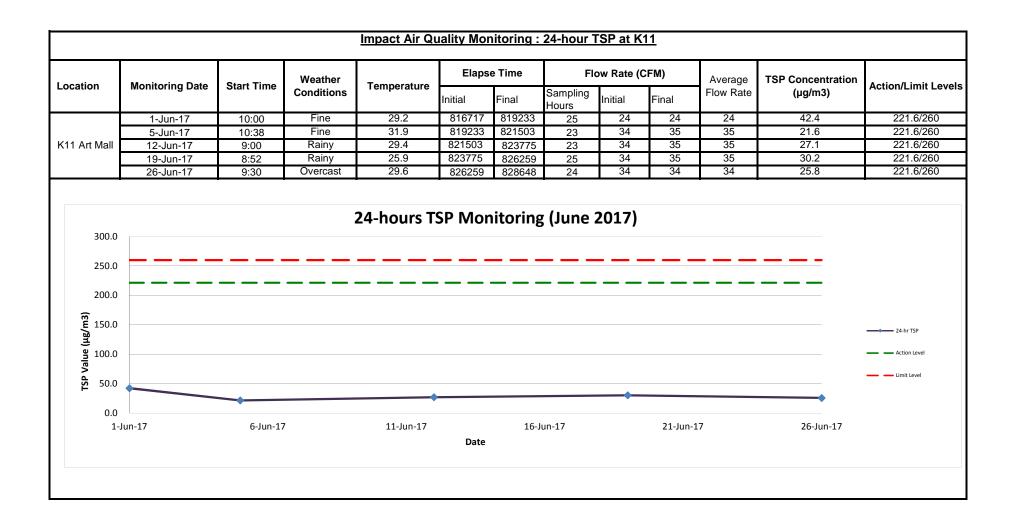

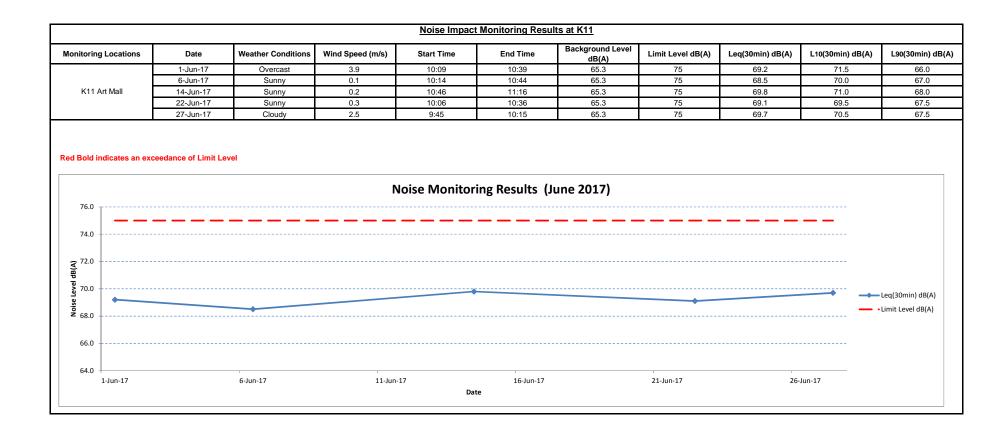


APPENDIX L

FLOW CHAT FOR HANDLING ENVIRONMENTAL COMPLAINTS

APPENDIX L

Complaint Response Procedure

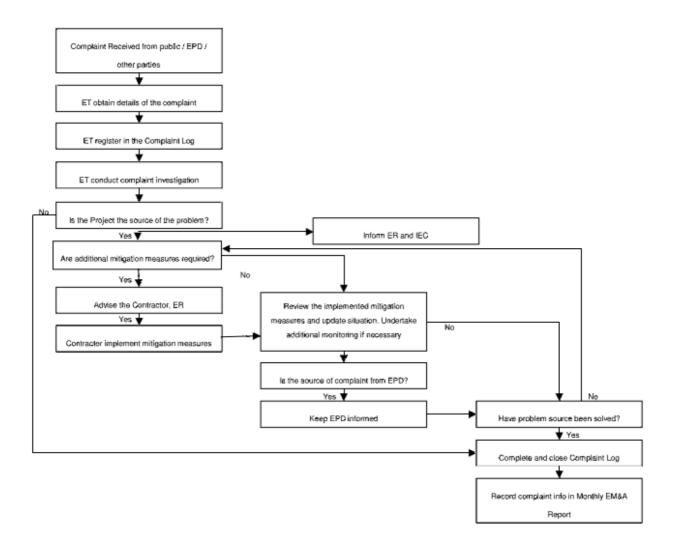

APPENDIX M

WASTE MANAGEMENT RECORDS

Monthly Summary Waste Flow Table for 2017 (year)

Contract No:C3840-13C Tsim Sha Tsui Station Carnarvon Road SubwayDate Reported:4-July-2017

	Actual Quantities of Inert C&D Materials Generated Monthly					Actual Quantities of Non-inert C&D Wastes Generated Monthly					
Month	Total Quantity Generated	Hard Rocks and Large Broken Concrete	Reused in the Contract	Reused in other Projects	Disposed as Public Fill	Imported Fill	Metals	Paper/ cardboard packaging	Plastics	Chemical Waste	Others, e.g. general refuse
		(See Note 3)							(see Note 2)		
	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in '000kg)	(in '000kg)	(in '000kg)	(in'000kg)	(in '000m3/tonne)
Carried from Project Start	4.9473	-	-	-	4.9473	-	-	-	-	-	0.0387
Jan	0.6189	-	-	-	0.6189	-	-	-	-	-	0.0017
Feb	0.9219	-	-	-	0.9219	-	-	-	-	-	0.0021
Mar	1.2994	-	-	-	1.2994	-	-	-	-	-	0.0045
Apr	0.6942	-	-	-	0.6942	-	-	-	-	-	0.0048
May	0.5717	-	-	-	0.5717	-	-	-	-	-	0.0034
June	0.4316	-	-	-	0.4316	-	-	-	-	-	0.0020
Sub-total	4.5377	-	-	-	4.5377	-	-	-	-	-	0.0185
July	-	-	-	-	-	-	-	-	-	-	-
Aug	-	-	-	-	-	-	-	-	-	-	-
Sept	-	-	-	-	-	-	-	-	-	-	-
Oct	-	-	-	-	-	-	-	-	-	-	-
Nov	-	-	-	-	-	-	-	-	-	-	-
Dec	-	-	-	-	-	-	-	-	-	-	-
Total	4.5377	-	-	-	4.5377	-	-	-	-	-	0.0185
Acc. Total	9.4850 (accumulated quantity of the project = carried amount + this year amount)										0.0572

Notes:

(1) The performance targets are given below:

- All excavated materials to be sorted for recovering the inert portion of C&D materials, e.g. hard rocks, soil and broken concrete, for reuse on the Site or disposal to designated outlets;

- All metallic waste to be recovered for collection by recycling contractors;
- All cardboard and paper packaging (for plant, equipment and materials) to be recovered, properly stockpiled in dry and covered condition to prevent cross contamination;
- All chemical wastes to be collected and properly disposed of by specialist contractors; and
- All demolition debris to be stored to recover broken concrete, reinforcement bars, mechanical and electrical fittings, hardware as well as other fitting / materials that have established recycling outlets.
- (2) Plastics refer to plastic bottles/containers, plastic sheets/foam from packaging material.
- (3) Broken concrete for recycling into aggregates.
- (4) The waste flow table shall also include C&D materials that are specified in the Contract to be imported for use at the Site.