

#### By Post & Fax (2591-0558)

Environmental Protection Department Environmental Assessment Division Metro Assessment Group Kowloon Section (2) 27th floor, Southorn Centre, 130 Hennessy Road, Wan Chai, Hong Kong Level 5, Festival Walk 80 Tat Chee Avenue Kowloon Tong, Kowloon Hong Kong t+852 2528 3031 d+852 2268 3212 f+852 2268 3950

lawrence.kan@arup.com

www.arup.com

Attention: Miss Winnie WC KWOK (Env Protection Offr (Metro Assessment) 24)

14 June 2018

Dear Miss Kwok

Contract No. CM 4/2017

Independent Environmental Checker for Construction of Dry Weather Flow Interceptor at Cherry Street Box Culvert

<u>Submission of Monthly Environmental Audit Report No.5</u>

In accordance with Clause 2.1 of the Environmental Permit for Proposed Sewage Pumping Station and Dry Weather Flow Interceptor at Cherry Street Box Culvert (No. EP-523/2016), we are pleased to submit herewith four hard copies and one electronic copy of the Monthly Environmental Audit Report No.5 for your perusal.

If you require any further information, please do not hesitate to contact Mr. Sam Tsoi or the undersigned at 2268-3212.

Yours sincerely

Lawrence Kan

Independent Environmental Checker

Enc

cc. DSD

Black & Veatch Hong Kong Limited CMGC-TECEL Joint Venture

Mr. C K Fung (by Fax: 2827 8700) Mr. Colin Chan (one hardcopy) Mr. Benson Yau (one hardcopy) **Drainage Services Department** 

Contract No. CM 4/2017 Independent Environmental Checker for Construction of Dry Weather Flow Interceptor at Cherry Street Box Culvert

Monthly Environmental Audit Report No.5 (May 2018)

First version | June 2018

This report takes into account the particular instructions and requirements of our client. It is not intended for and should not be relied upon by any third party and no responsibility is undertaken to any third party.

Job number 258952

Ove Arup & Partners Hong Kong Ltd Level 5 Festival Walk 80 Tat Chee Avenue Kowloon Tong Kowloon Hong Kong www.arup.com



# **Contents**

|   |        |   | Page |
|---|--------|---|------|
| 1 | INTR   | ODUCTION  | 1    |
|   | 1.1    | Background  | 1    |
|   | 1.2    | Scope of the Assignment                                 | 2    |
| 2 | Projec | ct Organization   | 3    |
|   | 2.1    | Project Organization and Management Structure           | 3    |
|   | 2.2    | Construction Activities in the Reporting Period         | 3    |
| 3 | Conci  | se Overview of Assignment Progress                      | 3    |
| 4 | Status | s on Implementation of Environmental Mitigation Measure | s 3  |
| 5 | Major  | r Accomplishment  | 6    |
|   | 5.1    | Deliverables  | 6    |
|   | 5.2    | Meetings  | 6    |
|   | 5.3    | Summary of Work Done                                    | 6    |
|   | 5.4    | IEC Site Audit  | 7    |

#### **Figures**

Figure 1 Project Location

#### **Appendices**

Appendix A Project Organization and Contacts of Key Personnel

## 1 INTRODUCTION

#### 1.1 Background

The existing Cherry Street Box Culvert (CSBC) is a reinforced concrete 8-cell stormwater box culvert; each cell is 4.8 m wide and 3.5 m high. The CSBC collects run-off from three upstream box culverts underneath Palm Street, Cheung Wong Road and a section of West Kowloon Corridor West and ultimately discharges into the New Yau Ma Tei Typhoon Shelter (NYMTTS).

At present, the water quality at NYMTTS and the odour associated with it remains unsatisfactory. It is believed that polluted flow, including those from the expedient connections, cross-connections between the foul water sewerage and the stormwater drainage system in the area found their way into the CSBC and in turn discharges into NYMTTS. Measures have to be taken to improve the present conditions at the CSBC.

In 2010, Environmental Protection Department (EPD) completed a West Kowloon and Tsuen Wan Sewerage Master Plans Study Review and recommended to construct a dry weather flow interceptor (DWFI) at the outfall of the CSBC. Upon commissioning of the DWFI system, the intercepted flow would be discharged to the existing sewerage system via proposed discharge sewerage.

The proposed DWFI system will comprise construction of a DWFI at the CSBC to intercept the dry weather flow (DWF) inside the box culvert and construction of a sewage pumping station to pump the intercepted DWF to the existing sewerage network via proposed twin rising mains.

The Project titled "Construction of dry weather flow interceptor at Cherry Street box culvert" mainly comprises the construction of (i) an underground DWFI with automatic penstocks at CSBC; (ii) a pumping station; (iii) an underground stormwater bypass box culvert; and (iv) about 270 metres of underground twin rising main from the pumping station in (ii) above to an existing sewer at Lin Cheung Road. The Project will be implemented under PWP Item No. 4380DS. The Project location I shown in **Figure 1**.

The Project is classified as a designated project under item F.3(b) (i), Part 1 of the Schedule 2 of the Environmental Impact Assessment Ordinance (Cap. 499) (EIAO), since the proposed sewage pumping station has an installed capacity (average dry weather flow) of more than 2,000m<sup>3</sup> per day and its boundary is less than 150 m from an existing residential area.

A project profile (Register No. PP-527/2015) ("Project Profile") entitled "Proposed Sewage Pumping Station and Dry Weather Flow Interceptor at Cherry Street Box Culvert" was submitted to Environmental Protection Department (EPD) under Application No. DIR241/2015. Permission to apply directly for environmental permit was granted by EPD in September 2015. An Environmental Permit (EP-

523/2016) ("EP") to construct and operate the Designated Project was issued to Drainage Services Department (DSD) on 23 December 2016.

According to the EP, DSD shall employ an Independent Environmental Checker ("IEC") to audit the implementation of all mitigation measures recommended in the Project Profile and required under the EP, and certify in writing in the monthly audit report full implementation of the mitigation measures during the construction phase of the Project

Arup was commissioned by DSD to conduct the IEC in accordance with the conditions stipulated in the EP (EP-523/2016) for a period of 64 months from 8 January 2018.

#### 1.2 Scope of the Assignment

Scope of work of this Assignment includes:

- (i) Provide the continual services of an IEC as stipulated in the Project Profile and the EP and reporting the findings to the Employer and the Engineer. The role of the IEC shall be independent from the Contractors;
- (ii) Conduct monthly site audits on the implementation of all mitigation measures recommended in the Project Profile and the EP and reporting the findings to the Employer and the Engineer;
- (iii) Advise the Engineer and the Employer on environmental issues related to the implementation of environmental mitigation measures under Contract No. DC/2017/01;
- (iv) Provide comments on the environmental aspects of the works programme, method statements and other relevant submissions by the Contractors;
- (v) Attend the monthly Site Safety and Environmental Management Committee (SSEMC) meetings;
- (vi) Report the findings of the site inspection and other environmental performance reviews to the Engineer and the Employer; and
- (vii) Submit monthly audit reports to EPD and confirming in writing in the report full implementation of the mitigation measures as recommended in the Project Profile and EP during and upon completion of the construction works under Contract No. DC/2017/01.

## 2 Project Organization

## 2.1 Project Organization and Management Structure

The project organization and contacts of key personnel of the Project are shown in **Appendix A**.

#### 2.2 Construction Activities in the Reporting Period

The construction activities carried out by the Contractor during the reporting period included the following:

- Erection of site hoarding was in progress;
- Top slab opening for desilting works was in progress;
- Preparation for desilting works was in progress; and
- Piling works were in progress.

# **3** Concise Overview of Assignment Progress

As only minor preparation works were carried out by the Contractor within the construction site, the environmental performance was considered acceptable during the assignment period from 1 May 2018 to 31 May 2018.

# 4 Status on Implementation of Environmental Mitigation Measures

The potential environmental impacts and proposed mitigation measures to be incorporated into the design and construction of the Project are summarised in **Table 4.1** below.

**Table 4.1** Summary of potential environmental impacts and proposed environmental mitigation measures

| Mitigation Measures   | Implementation<br>Agent               | Status      |
|---|---------------------------------------|-------------|
| Dust nuisance   |                                       |             |
| <ol> <li>Adopt dust control and suppression measures as stipulated in the Air Pollution Control (Construction Dust) Regulation.</li> <li>Water spraying on exposed area and during excavation.</li> <li>Provide wheel-washing facilities.</li> <li>Cover stockpile of dusty materials by impervious sheets.</li> <li>Provide hoarding of not less than 2.4m high from ground level along</li> </ol> | Contractor<br>(Construction<br>Phase) | In progress |

| Mitigation Measures   | Implementation<br>Agent                                       | Status                     |
|---|---|----------------------------|
| the site boundary adjoining Hoi Fai Road.  6. Cover dusty load on trucks before they leave the construction site.  7. Avoid concurrent excavation activities for construction of underground DWFI, underground emergency stormwater bypass culvert and CSBCSPS.  8. Minimize area involving dusty construction activities by  |   |                            |
| arrangement of construction activities and methods.   |   |                            |
| Odour  1. Locate the inlet chamber, screen chamber, valve chamber and wet well of the sewage pumping station underground and enclose them by a reinforced concrete structure.  2. Install and properly maintain a deodorizer with a forced ventilation system and an odour removal efficiency of at least 99.5%.  | Contractor<br>(Construction<br>Phase)<br>DSD<br>(Maintenance) | N/A in the reporting month |
| <ol> <li>Water Quality</li> <li>Control construction surface run-off according to ProPECC PN1/94, EPD's Practice Note for Professional Persons, Construction Site Drainage.</li> <li>All chemical tanks and storage areas will be provided with locks and placed on sealed areas, within bunds of a capacity equal to 110% of the storage capacity of the largest tank.</li> <li>Install and properly maintain a standby pump and dual power supply.</li> <li>Provide a telemetry system to transmit signals showing irregularity or operational problem of the sewage pumping station and the dry weather flow interceptor to the Storagetters.</li> </ol> | Contractor<br>(Construction<br>Phase)<br>DSD<br>(Maintenance) | N/A in the reporting month |
| flow interceptor to the Stonecutters Island Sewage Treatment Works.  Noise  1. Adoption of standard control measures such as adopting quiet mechanical equipment, temporary noise barriers and good site practices etc.   | Contractor<br>(Construction<br>Phase)                         | N/A in the reporting month |

| Mitigation Measures  | Implementation<br>Agent  | Status      |
|--|--------------------------|-------------|
| 2. Construction Noise Permit is required                             | 0                        |             |
| for construction work during   |                          |             |
| restricted hours as defined under the                                |                          |             |
| Noise Control Ordinance.   |                          |             |
| 3. Locate the pumps and screening                                    |                          |             |
| facilities of the sewage pumping                                     |                          |             |
| station underground and enclose them                                 |                          |             |
| by a reinforced concrete structure.                                  |                          |             |
| 4. Install all outlets of the extraction fans with acoustic louvers. |                          |             |
|  |                          |             |
| Waste Management  1. Standard waste management                       | Contractor               | N/A in the  |
| 1. Standard waste management measures and good site practices in     | Contractor (Construction | reporting   |
| waste handling, disposal and   | Phase)                   | month       |
| transportation will be implemented.                                  | T Hase)                  | monun       |
| 2. The Contractor will be required to                                |                          |             |
| sort all C&D materials and general                                   |                          |             |
| refuse into different categories for                                 |                          |             |
| reuse on site, recycling and disposal                                |                          |             |
| at designated public fill reception                                  |                          |             |
| facilities or landfills. Disposal of                                 |                          |             |
| C&D materials will be managed  |                          |             |
| through the trip-ticket system as                                    |                          |             |
| stipulated in DEVB TC(W) No.   |                          |             |
| 6/2010.  |                          |             |
| 3. All chemical wastes due to  |                          |             |
| maintenance of equipment will be                                     |                          |             |
| handled, stored and disposed of in                                   |                          |             |
| accordance with the requirements of                                  |                          |             |
| the Waste Disposal (Chemical Waste)                                  |                          |             |
| (Chemical) Regulation. 4. General refuse will be stored and          |                          |             |
| disposed of separately from general                                  |                          |             |
| construction waste and chemical                                      |                          |             |
| waste. The storage bins for general                                  |                          |             |
| refuse will be provided with lids,                                   |                          |             |
| which should be kept closed to avoid                                 |                          |             |
| odour nuisance and wind blown litter.                                |                          |             |
| General refuse will be removed                                       |                          |             |
| regularly and disposed of to landfills.                              |                          |             |
| Landscape and Visual   |                          |             |
| 1. Erect site hoarding with decorative                               | Contractor               | In progress |
| features that are compatible with the                                | (Construction            |             |
| surrounding environment;   | Phase)                   |             |
| 2. Maintain site cleanliness and tidiness;                           | Dan                      |             |
| 3. Properly manage construction waste                                | DSD                      |             |
| in the works area;   | (Maintenance)            |             |

| Mitigation Measures                    | Implementation<br>Agent | Status |
|--|-------------------------|--------|
| 4. Reinstate all temporary works areas |                         |        |
| to its original conditions upon        |                         |        |
| completion of works.                   |                         |        |
| 5. Implement and properly maintain the |                         |        |
| landscape and visual mitigation        |                         |        |
| measures (e.g. rooftop greening,       |                         |        |
| grasscrete, paving lock, vertical      |                         |        |
| greening, permanent shrub planter,     |                         |        |
| removable shrub planter, bench with    |                         |        |
| shelter, and removable planter with    |                         |        |
| trees) as shown in Figure 2 of the EP. |                         |        |

# 5 Major Accomplishment

#### 5.1 Deliverables

Deliverables completed in the reporting period is summarised in **Table 5.1**.

**Table 5.1** Completed deliverables

| Description                              | Submitted by IEC |
|--|------------------|
| Monthly Environmental Audit Report No. 4 | 11 May 2018      |
| (April 2018)                             |                  |

Planned deliverables to be completed in the coming reporting period is summarised in **Table 5.2**.

**Table 5.2** Planned deliverables

| Description   | Planned<br>Submission Date | Status      |
|---|----------------------------|-------------|
| Monthly Environmental Audit Report No. 5 (May 2018) | 14 June 2018               | On schedule |

# 5.2 Meetings

No meeting was held in the reporting period.

# 5.3 Summary of Work Done

Upon commencement of the Assignment, accumulated numbers IEC monthly environmental audit report submission and various kinds of meetings are summarized in **Table 5.3**.

**Table 5.3** Summary of work done

| Work                                   | Number |
|--|--------|
| IEC Monthly Environmental Audit Report | 4      |
| IEC monthly site inspection            | 1      |


#### 5.4 IEC Site Audit

IEC site audit was conducted on 29 May 2018 (Tue) with the presence of DSD, Resident Site Engineer, Contractor and IEC. Site observations were listed as below.

- Site hoarding erection was in progress and site office was set up;
- One of the top slab for desilting works was opened and covered by canvas;
   and
- 3 sedimentation tanks were set up at the site for wastewater treatment before discharge;
- Piling works in progress; and
- Most of the open-excavation area was covered by canvas.

# Figure 1

Project Location

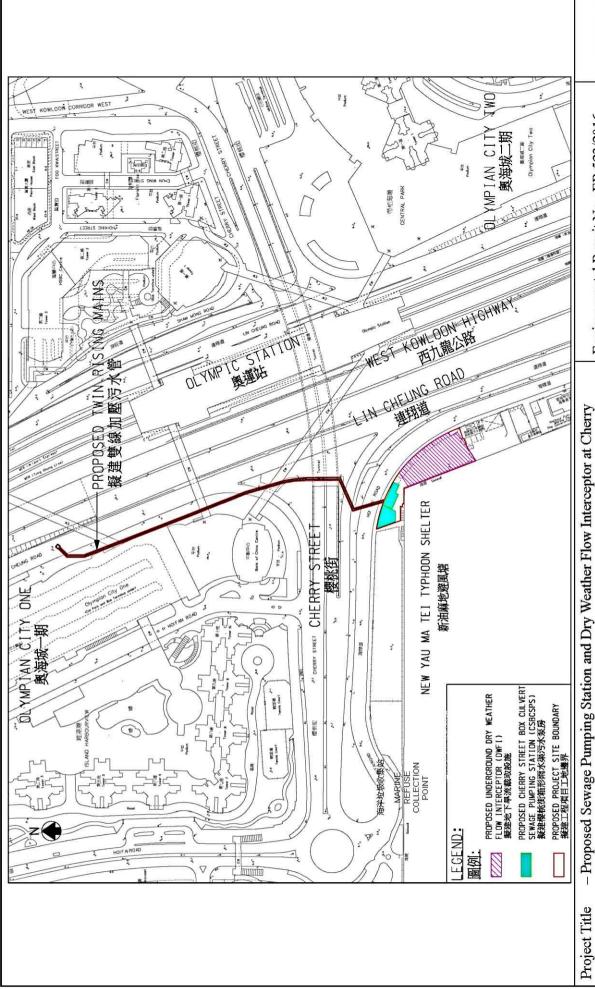



Environmental Permit No.: EP-523/2016

環境許可證編號: EP-523/2016

Project Location Plan 工程項目位置圖 Figure 1 圖 1


- 櫻桃街箱形雨水渠擬建污水泵房及旱流截取設施

Street Box Culvert

工程項目名稱

# **Appendix A**

Project Organization and Contacts of Key Personnel

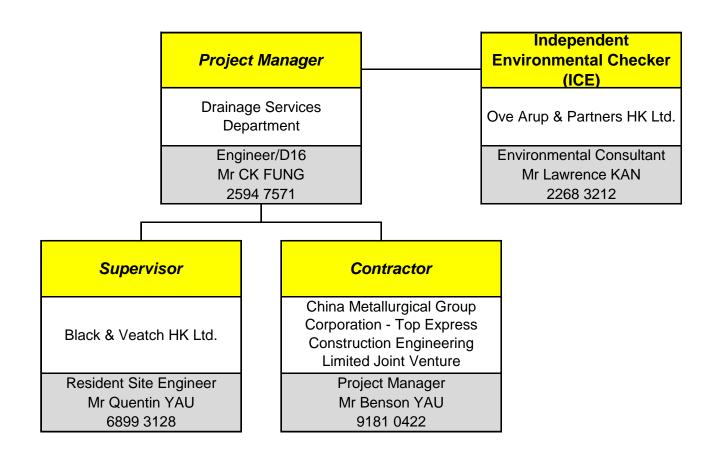

———Contractual Relationship