

Lam Environmental Services Limited

# CONTRACT NO. SPW 25/2018

# ENVIRONMENTAL TEAM FOR RELOCATION OF SHA TIN SEWAGE TREATMENT WORKS TO CAVERNS – SITE PREPARATION AND ACCESS TUNNEL CONSTRUCTION

# UNDER ENVIRONMENTAL PERMIT NO. EP-533/2017

# MONTHLY ENVIRONMENTAL MONITORING & AUDIT REPORT

#### **JUNE 2020**

CLIENTS:

#### PREPARED BY:

**Drainage Services Department** 

#### Lam Environmental Services Limited

11/F Centre Point 181-185 Gloucester Road, Wanchai, H.K.

Telephone: (852) 2882-3939 Facsimile: (852) 2882-3331 E-mail: <u>info@lamenviro.com</u> Website: <u>http://www.lamenviro.com</u>

**CERTIFIED BY:** 

/

Derek LO Environmental Team Leader

DATE:

July 2020



AECOM Asia Co. Ltd. 12/F, Grand Central Plaza, Tower 2 138 Shatin Rural Committee Road Shatin, Hong Kong

Attn: Mr. Simon Leung

Your Reference

#### Contract No. SPW 01/2020

Independent Environmental Checker for Relocation of Sha Tin Sewage Treatment Works to Caverns – Site Preparation and Access Tunnel Construction

Our Reference EC/TC/BW/bw/T416871/ Correspondence/ Outgoing/L048

Environmental Permit No. EP-533/2017

3/F International Trade Tower 348 Kwun Tong Road Kowloon Hong Kong

T +852 2828 5757 F +852 2827 1823 mottmac.hk EP Condition 3.5 – Monthly EM&A Report for June 2020

14 July 2020 By Email

Dear Sir,

I refer to the letter dated 13 July 2020 (ref: LES/J2019-02/CS/L056) from the Environmental Team Leader certifying the captioned Monthly EM&A Report for June 2020.

I have no comment on the captioned report and hereby verify it as having complied with the requirements as set out in the EM&A Manual for the captioned project, in accordance with Condition 3.5 of Environmental Permit No. EP-533/2017.

Should you have any queries regarding the captioned or require any further information, please contact the undersigned at 2828 5875.

Yours faithfully for MOTT MACDONALD HONG KONG LIMITED

Brandon Wong Independent Environmental Checker T +852 2828 5875 Brandon.Wong@mottmac.com

Encl.

c.c. DSD

Lam Environmental Services Limited China State Joint Venture Mr. Kenneth Poon Mr. Derek Lo Mr. F M Chung By Email By Email By Email



# TABLE OF CONTENTS

1	IN	TRODUCTION	6
	1.1 1.2	Scope of the Report Structure of the Report	
2	PF	ROJECT BACKGROUND	8
	2.1 2.2 2.3 2.4	Background Scope of the Project and Site Description Project Organization and Contact Personnel Construction Activities	8 9
3	ST	TATUS OF REGULATORY COMPLIANCE	. 11
	3.1 3.2	Status of Environmental Licensing and Permitting under the Project Status of Submission under the EP- 533/2017	
4	MON	ITORING REQUIREMENTS	. 13
	4.1 4.2	Air Monitoring Noise Monitoring	
5.	MON	ITORING RESULTS	. 19
	5.1 5.2 5.3	Air Monitoring Results Noise Monitoring Results Waste Management	. 19
6.	LANI	O CONTAMINATION	. 21
7.	COM	PLIANCE AUDIT	. 22
	7.1 7.2 7.3 7.4	Air Monitoring Noise Monitoring Review of the Reasons for and the Implications of Non-compliance Summary of action taken in the event of and follow-up on non-complia 22	. 22
8.	ENVI	RONMENTAL SITE AUDIT	. 23
9.	COM	PLAINTS, NOTIFICATION OF SUMMONS AND PROSECUTION	. 25
10.	CON	CLUSION	



#### LIST OF TABLES

- Table 2.1
   Schedule 2 Designated Projects under this Project
- Table 2.2
   Contact Details of Key Personnel
- Table 3.1
   Summary of the current status on licences and/or permits on environmental protection pertinent to the Project
- Table 3.2 Summary of submission status for Contract no. DC2018/05 under EP-533/2017
- Table 4.1 Air Monitoring Station
- Table 4.2
   Air Quality Monitoring Equipment
- Table 4.3
   Action and Limit Level for Air Quality Monitoring
- Table 4.4
   Noise Monitoring Station
- Table 4.5 Noise Monitoring Equipment
- Table 4.6 Action and Limit Level for Noise Monitoring
- Table 5.1 Details of Waste Disposal for Contract no. DC/2018/05
- Table 8.1 Summary of Environmental Inspections for Contract no. SPW 25/2018
- Table 8.2
   Summary of Landscape Inspections for Contract no. SPW 25/2018
- Table 8.3
   Summary of Ecology Inspections for Contract no. SPW 25/2018
- Table 8.4
   Summary of Land Decontamination Inspections for Contract no. SPW 25/2018
- Table 9.1
   Cumulative Statistics on Complaints
- Table 9.2
   Cumulative Statistics on Successful Prosecutions
- Table 10.1 Construction Activities and Recommended Mitigation Measures in Coming Reporting Month

#### LIST OF FIGURES

Figure 2.1 Project Layout

Figure 2.2 Project Organization Chart

Figure 4.1 Locations of Air Quality Monitoring Station

Figure 4.2 Locations of Noise Monitoring Station

#### LIST OF APPENDICES

Appendix 1.1	Ecological Monitoring Report
Appendix 3.1	Environmental Mitigation Implementation Schedule
Appendix 4.1	Action and Limit Level
Appendix 4.2	Copies of Calibration Certificates
Appendix 4.3	Wind data extracted from Sha Tin HKO Automatic Weather Station
Appendix 5.1	Monitoring Schedule for Reporting Month and Next Month
Appendix 5.2	Air Quality Monitoring Results and Graphical Presentations
Appendix 5.3	Noise Monitoring Results and Graphical Presentations
Appendix 5.4	Monthly Summary Waste Flow Table
Appendix 7.1	Event and Action Plans
Appendix 7.2	Summary for Notification of Exceedance
Appendix 9.1	Complaint Log
Appendix 10.1	Construction Programme of Individual Contracts



#### EXECUTIVE SUMMARY

- i. This is the Environmental Monitoring and Audit (EM&A) Monthly Report June 2020 of Relocation of Sha Tin Sewage Treatment Works to Caverns – Site Preparation and Access Tunnel Construction under Environmental Permit no. EP-533/2017 (Hereafter as "the Project"). This is the 16th EM&A report presenting the environmental monitoring findings and information recorded during the period of 1 June 2020 to 30 June 2020. The cut-off date of reporting is at the end of each reporting month.
- ii. In the reporting month, the principal work activities conducted are as follow:
   Contract no. DC/2018/05 Relocation of Sha Tin Sewage Treatment Works to Caverns Site
   Preparation and Access Tunnel Construction
  - Site Clearance
  - Hand dig trial pit excavation
  - Root pruning and transplantation
  - Excavation for temporary haul road construction
  - Soil nail
  - Retaining wall construction
  - Piling works
  - Haul road construction
  - Noise barrier installation
  - Drainage works
  - Watermain installation
  - Construction of Community Liaison Centre
  - Construction of steel bridge
  - Tunnelling works
  - Ground investigation
  - Construction of transformer room
  - Land decontamination

#### Air Quality Monitoring

- iii. 1-hour Total Suspended Particulates (TSP) monitoring would be conducted at five monitoring stations. The sampling frequency is 3 times in every 6 days.
- iv. Air quality monitoring for the stations AM1 and AM2 were commenced on 12 April 2019 while station AM5 was commenced on 18 April 2019. Air quality monitoring for the station AM4 was commenced on 3 May 2019. AM3(B) is proposed to EPD for approval.
- v. No action or limit level exceedance was determined in the reporting period for the stations of AM1, AM2, AM4 and AM5.

3



#### Noise Monitoring

- vi. Noise monitoring would be conducted at five noise monitoring stations once per week.
- vii. Noise monitoring for stations CM4 and CM5 were commenced on 13 April 2019 and 18 April 2019 respectively. Noise monitoring for stations CM1 and CM3 were commenced on 2 May 2019. CM2(B) is proposed to EPD for approval.
- viii. Additional weekly noise monitoring was carried out at CM4 on 2, 12, 16, 26 and 29 June 2020 with respect to the restricted hour works under CNP GW-RN0287-20 and GW-RN0420-20. All the results are within the baseline level range after baseline correction.
- No action or limit level exceedance was determined in the reporting period for the stations of CM1, CM3, CM4 and CM5.

#### Site Inspections and Audit

- x. The Environmental Team (ET) conducted weekly site inspections for the Contract on 4, 10, 17, and 23 June 2020. IEC attended the joint site inspection on 23 June 2020. No non-compliance was found during the site inspection. <u>Complaints, Notifications of Summons and Successful Prosecutions</u>
- xi. No environmental complaint was received in the reporting period.
- xii. No notification of summons and successful prosecutions was received in the reporting month.

#### Reporting Changes

xiii. The Ecological Monitoring Report is attached in the Appendix 1.1.

#### Future Key Issues

xiv. In coming reporting months, the scheduled construction activities and the recommended mitigation measures are listed as follows:

Key Construction Works	Recommended Mitigation Measures
<ul> <li>Site clearance, excavation for temporary haul road construction, soil nail, retaining wall construction, haul road construction, noise barrier installation, drainage works, watermain installation, construction of Community Liaison Centre, tunnelling works, construction of transformer room, pipe jacking and</li> </ul>	<ul> <li>Dust control during dust generating works;</li> <li>Implementation of proper noise pollution control; and</li> <li>Provision of protection to ensure no runoff out of site area or direct discharge into public drainage system.</li> <li>Direct impact to plant species of conservation importance recorded in the vicinity of the construction sites shall be avoided</li> </ul>



Key Construction Works	Recommended Mitigation Measures		
<ul><li>Iand decontamination</li><li>Root pruning and transplantation</li></ul>	<ul> <li>Excavation materials shall be well covered</li> <li>Mitigation measures to dust and noise control should be provided to construction of noise barrier and Community Liaison Centre</li> </ul>		



#### 1 Introduction

#### 1.1 Scope of the Report

- 1.1.1. Lam Environmental Services Limited (LES) has been appointed to work as the Environmental Team (ET) under Environmental Permit (EP) no. EP-533/2017 to implement the Environmental Monitoring and Audit (EM&A) programme as stipulated in the EM&A Manual of the approved Environmental Impact Assessment (EIA) Report for Relocation of Sha Tin Sewage Treatment Works to Caverns – Site Preparation and Access Tunnel Construction (Register No.: AEIAR-202/2016).
- 1.1.2. In accordance with Clause 3.5 stated in EP-533/2017, 4 hard copies and 3 electronic copies of the Monthly EM&A Report shall be submitted to the Director within 2 weeks after the end of each reporting month throughout the entire construction period.
- 1.1.3. In accordance with Section 13.4.1.1 of the Project EM&A Manual, the Monthly EM&A Report should be prepared and submitted to the Contractor, the IEC, the ER and EPD within 10 working days at the end of each reporting month, with the first report due the month after construction commences.

#### 1.2 Structure of the Report

- **Section 1** *Introduction* details the scope and structure of the report.
- Section 2 *Project Background* summarizes background and scope of the project, site description, project organization and contact details of key personnel during the reporting period.
- Section 3 Status of Regulatory Compliance summarizes the status of valid Environmental Permits / Licenses during the reporting period.
- Section 4 *Monitoring Requirements* summarizes all monitoring parameters, monitoring methodology and equipment, monitoring locations, monitoring frequency, criteria and respective event and action plan and monitoring programmes.
- Section 5 *Monitoring Results* summarizes the monitoring results obtained in the reporting period.
- Section 6 Compliance Audit summarizes the auditing of monitoring results, all exceedances environmental parameters.



- Section 7 Environmental Site Audit summarizes the findings of weekly site inspections undertaken within the reporting period, with a review of any relevant follow-up actions within the reporting period.
- Section 8 Complaints, Notification of summons and Prosecution summarizes the cumulative statistics on complaints, notification of summons and prosecution
- Section 9 Conclusion



# 2 Project Background

# 2.1 Background

- 2.1.1. The Relocation of Sha Tin Sewage Treatment Works (STSTW) to Caverns (the Project) is implemented so as to release the existing site, of a size about 28 hectares, for other uses.
- 2.1.2. In May 2012, Drainage Services Department (DSD), the Project Proponent commenced a detailed feasibility study on "Relocation of Sha Tin Sewage Treatment Works to Caverns" (the Feasibility Study). The findings of Feasibility Study affirmed that relocating the STSTW to caverns to be constructed at Nui Po Shan of A Kung Kok is technically feasible and financially viable.
- 2.1.3. The Project is a Designated Project (DP) under the Environmental Impact Assessment Ordinance (EIAO). An application for an Environmental Impact Assessment (EIA) Study Brief under section 5(1)(a) of the EIAO was submitted on 12 May 2014 with a Project Profile (No. PP-508/2014) for the Project. An EIA Study Brief (No. ESB-273/2014) was issued in June 2014. An EIA for the Project was then undertaken, as part of the Assignment, in accordance with this EIA Study Brief and the Technical Memorandum on Environmental Impact Assessment Process (EIAO-TM). The location of the Project is shown Figure 2.1.

# 2.2 Scope of the Project and Site Description

2.2.1. The Project covers the following DP elements as specified in Schedule 2 of the EIAO (Cap.499), *Table 2.1* summarises the DPs under this Project.

Item	Designated Project	EIAO Reference	
DP1	Sewage treatment works with an installed capacity of more than 15,000 m3 per day under Item F.1Schedule 2, Part I,		
DP2	<ul> <li>Sewage treatment works under Item F.2</li> <li>With an installed capacity of more than 5,000 m3 per day; and</li> <li>A boundary of which is less than 200m from the nearest boundary of an existing or planned residential area, educational institution and health care institution.</li> </ul>		
DP3	An activity for the reuse of treated sewage effluent from a treatment plant under Item F.4	Schedule 2 Part I	

Table 2.1Schedule 2 Designated Projects under this Project



DP4	Underground rock caverns under Item Q.2	Schedule 2 Part I
DP5	An explosives depot in a stand-alone, purpose built Schedule 2 Part I; building under Item K.10	
DP6	Decommissioning of an explosives depot under Item 11	Schedule 2 Part II

# 2.3 Project Organization and Contact Personnel

- 2.3.1 Drainage Services Department is the overall project controllers for the Project. For the construction phase of the Project, Project Engineer, Contractor(s), Environmental Team and Independent Environmental Checker are appointed to manage and control environmental issues.
- 2.3.2 The proposed project organization and lines of communication with respect to environmental protection works are shown in <u>Figure 2.2.</u> Key personnel and contact particulars are summarized in *Table 2.2*:

Party	Role	Post	Name	Contact No.	Contact Fax
AECOM	Engineer's Representative	Chief Resident Engineer	Mr. Leung Chi Man, Simon	6393 8645	3914 5888
China State Joint	Contractor	Site Agent	Mr. KONG Ming, Elvis	9186 2081	
Venture		Environmental Officer	Ms. CHIU Mei Yu, Gloria	9224 2413	2672 2501
Mott MacDonald Hong Kong Limited	Independent Environmental Checker (IEC)	Independent Environmental Checker (IEC)	Mr. Brandon Wong	2828 5875	2827 1823
Lam Environmental Services Limited	Environmental Team (ET)	Environmental Team Leader (ETL)	Mr. Derek Lo	2882 3939	2882 3331

#### Table 2.2 Contact Details of Key Personnel

# 2.4 Construction Activities

- 2.4.1 In the reporting month, the principal work activities conducted are as follow.
  - Site Clearance
  - Hand dig trial pit excavation



- Root pruning and transplantation
- Excavation for temporary haul road construction
- Soil nail
- Retaining wall construction
- Piling works
- Haul road construction
- Noise barrier installation
- Drainage works
- Watermain installation
- Construction of Community Liaison Centre
- Construction of steel bridge
- Tunnelling works
- Ground investigation
- Construction of transformer room
- Land decontamination
- 2.4.2 In coming reporting months, the scheduled construction activities are listed as follows:
  - Site Clearance
  - Root pruning and transplantation
  - Excavation for temporary haul road construction
  - Soil nail
  - Retaining wall construction
  - Haul road construction
  - Noise barrier installation
  - Drainage works
  - Watermain installation
  - Construction of Community Liaison Centre
  - Tunnelling works
  - Construction of transformer room
  - Pipe jacking
  - Land decontamination



#### 3 Status of Regulatory Compliance

# 3.1 Status of Environmental Licensing and Permitting under the Project

3.1.1. A summary of the current status on licences and/or permits on environmental protection pertinent to the Project is shown in *Table 3.1*.

# Table 3.1 Summary of the current status on licences and/or permits on environmental protection pertinent to the Project

Permits and/or Licences	Reference No.	Issued Date	Valid Period & Expiry Date (dd-MM-yyyy to dd-MM-yyyy)	Status
Notification of Works Under APCO	442872	7/3/2019	N.A.	Valid
Discharge Licence	WT00034319-2019	3/9/2019	30/9/2024	Valid
Billing account under Waste Disposal Ordinance	7033825	17/4/2019	N/A	Valid
Registration as a Chemical Waste Producer	5117-756-C4363-01	9/5/2019	N/A	Valid
Asbestos Abatement Licence				Nil
Construction Noise Permit	GW-RN0287-20	20/4/2020	(22/4/2020 to 21/6/2020)	Valid
Construction Noise Permit	GW-RN0341-20	15/5/2020	(22/5/2020 to 21/9/2020)	Valid
Construction Noise Permit GW-RN0420-20		12/6/2020	(22/6/2020 to 21/9/2020)	Valid

#### 3.2 Status of Submission under the EP- 533/2017

3.2.1. A summary of the current status on submission for Contract no. DC/2018/05 under EP-533/2017 is shown in *Table 3.2*.

Table 3.2 Summary of submission status for Contract no. DC2018/05 under EP-533/2017

EP Condition	Submission	Date of Submission	
Condition 1.12	Notification of Commencement Date of Works	18 February 2019	
Condition 2.1	Notification of EPD of Community Liaison Group	18 April 2019	



EP Condition	Submission	Date of Submission
Condition 2.12	Management Organization of Main Construction Companies	18 April 2019
Condition 2.14	Submission of Detailed Vegetation Survey Report and Protection and Transplantation Proposal	18 April 2019
Condition 2.15	Submission of Detailed Woodland Compensation Plan	ТВС
Condition 2.18	Submission of Landscape & Visual Mitigation and Tree Preservation Plan(s)	18 April 2019
Condition 2.2	Notification of EPD of telephone hotline	18 April 2019
Condition 2.22 Submission of Measures to Mitigate Traffic Noise from Ma On Shan Road		18 April 2019
Condition 3.1 Proposal for Commencement of Construction Phase Air Quality Monitoring in Phases		17 April 2019
Condition 3.1	Proposal for Alternative Sampling Method for Construction Phase Air Quality Monitoring (1-hr TSP)	16 April 2019
Condition 3.1	Proposal for Proposed Fine Adjustment for Air and Noise Monitoring Stations at Kowloon City Baptist Church Hay Nien Primary School & Updated EM&A Manual	6 March 2020
Condition 3.1 Temporary suspension of EM&A Programme during 29 Jan 2020 to 2 Feb 2020		28 February 2020
Condition 4.2	Dedicated internet website	22 May 2019



#### 4 Monitoring Requirements

#### 4.1 Air Monitoring

### AIR QUALITY MONITORING STATIONS

- 4.1.1. Air monitoring stations AM1 and AM2 were setup and commencement of monitoring on 12 April 2019 while AM5 was setup and commencement of monitoring on 18 April 2019. Air quality monitoring for the station AM4 was commenced on 3 May 2019. AM3(B) is proposed to EPD for approval, no monitoring for AM3(B) was conducted in the reporting period.
- 4.1.2. Based on the Project baseline report, the air quality monitoring station AM3, Ma On Shan Tsung Tsin Secondary School was relocated to AM3(A), Kowloon City Baptist Church Hay Nien Primary School.
- 4.1.3. A change of the monitoring location in subsequent impact monitoring for AM3(A) Kowloon City Baptist Church Hay Nien Primary School was identified necessary as access was not granted for setting up the onsite monitoring station. The new monitoring location AM3(B) ground level of outside A Kung Kok Street Garden for impact air quality monitoring station was proposed based on the criteria as stated in section 2.2.4.2 and 2.2.4.3 of EM&A Manual by ET and approved by ER and verified by IEC and submitted to EPD for approval on 5 September 2019.
- 4.1.4. Air quality monitoring station AM6 will commence at a later stage upon the commencement of the decommissioning and demolition of the existing Shatin Sewage Treatment Works. The proposal was verified by IEC and approved by EPD on 9 May 2019.
- 4.1.5. The air monitoring stations for the Project are listed and shown in *Table 4.1* and *Figure 4.1*.

Monitoring Station ID	Monitoring Location	Level (in terms of no. of floor)
AM1	Ah Kung Kok Fishermen Village	G/F
AM2	Block H, Kam Tai Court	Roof
AM3(B)	Outside A Kung Kok Street Garden	G/F
AM4	Wellborn Kindergarten	G/F
AM5	The Neighbourhood Advice-Action Council Harmony Manor	Roof

# Table 4.1 Air Monitoring Station

#### AIR MONITORING PARAMETERS, FREQUENCY AND DURATION



- 4.1.6. One-hour TSP levels should be measured to indicate the impacts of construction dust on air quality.
- 4.1.7. The sampling frequency of at least three times in every six-days should be undertaken when the highest dust impact occurs.
- 4.1.8. Portable direct reading dust meter was proposed to use for 1-hour TSP level instead of HVS to undertaking the air quality monitoring for the project at the stations of AM1, AM2, AM3(A), AM4 and AM5. The proposal was verified by IEC and submitted to EPD, the proposal has approved by EPD on 28 May 2019.
  SAMPLING PROCEDURE AND MONITORING EQUIPMENT
- 4.1.9. Monitoring Procedures
  - (a) Check the calibration period of portable direct reading dust meter prior to monitoring (The direct reading dust meter was calibrated at 2-years interval and checked with High Volume Sampler (HVS) yearly.)
  - (b) Record the site condition near / around the monitoring stations.
  - (c) Install the portable direct reading dust meter to the monitoring location.
  - (d) Slide the power switch to turn the power on.
  - (e) Check of portable direct reading dust meter to ensure the equipment operation in normal condition.
  - (f) Select the period of measurement to 60mins.
  - (g) Check and set the correct time.
  - (h) Select the appropriate unit display for the equipment.
  - Slide the power switch to turn the power off when the monitoring period ended (3 times 1 hour TSP monitoring per day).
  - (j) Uninstall the portable direct reading dust meter
  - (k) Collected the sampled data for analysis.
  - (I) Remark: Procedures (c) to (h) may be different subject to the brands and models of portable direct reading dust meter
- 4.1.10. Maintenance and Calibration
  - (a) The direct reading dust meter was calibrated at 2-years interval and checked with High Volume Sampler (HVS) yearly to determine the accuracy and validity of the results measured.
  - (b) Checking of direct reading dust meter will be carried out in order to determine the conversion factor between the direct reading dust meter and the standard equipment, HVS. The comparison check is to be considered valid based on correlation coefficient checked by HOKLAS laboratory.
- 4.1.11. The 1-hour TSP air quality monitoring was performed by using portable direct reading dust meters at each designated monitoring station. The brand and model of the equipment are given in **Table 4.2**.



### Table 4.2 Air Quality Monitoring Equipment

Equipment	Brand and model	
	Met One BT- 645	
Portable direct reading dust meter	Met One AEROCET 831	
	Hal Technology HAL-HPC301	

4.1.12. The calibration certificates of the air quality monitoring equipment are attached in <u>Appendix</u>
 <u>4.2.</u> The calibration dates in the calibration certificates for portable direct reading dust meter models Met One BT-645 and Met One Aerocet 831 are presented in "month/day/year" format.

#### WIND DATA

4.1.13. The representative wind data from Sha Tin HKO Automatic Weather Station was obtained covering the 1-hr TSP monitoring periods. The wind data were extracted and shown in <u>Appendix 4.3.</u>

# EVENT AND ACTION PLAN

4.1.14. The Action and Limit levels for construction air quality are defined in Table 4.3 and <u>Appendix</u>
 <u>4.1</u>. Should non-compliance of the air quality criteria occur, action in accordance with the Event and Action Plan in <u>Appendix 6.1</u> shall be carried out.

# Table 4.3 Action and Limit Level for Air Quality Monitoring

Monitoring Locations	1-hour TSP Level in μg/m3		
	Action Level	Limit Level	
AM1	294	500	
AM2	325	500	
AM3(B)	360	500	
AM4	297	500	
AM5	349	500	

# 4.2 Noise Monitoring

#### NOISE MONITORING STATIONS

4.2.1. Noise monitoring stations CM4 and CM5 were setup and commencement of monitoring on 13 April 2019 and 18 April 2019 respectively. Noise monitoring for stations CM1 and CM3 were



commenced on 2 May 2019. CM2(B) is proposed to EPD for approval, no monitoring for CM2(B) was conducted in the reporting period.

- 4.2.2. Based on the Project baseline report, the noise monitoring station CM2, Ma On Shan Tsung Tsin Secondary School was relocated to CM2(A), Kowloon City Baptist Church Hay Nien Primary School.
- 4.2.3. A change of the monitoring location in subsequent impact monitoring for CM2(A) Kowloon City Baptist Church Hay Nien Primary School was identified necessary as access was not granted for setting up the onsite monitoring station. The new monitoring location CM2(B) ground level of outside A Kung Kok Street Garden for impact air quality monitoring station was proposed based on the criteria as stated in section 2.2.4.2 and 2.2.4.3 of EM&A Manual by ET and approved by ER and verified by IEC and submitted to EPD for approval on 5 September 2019.
- 4.2.4. The noise monitoring stations for the Project are listed and shown in *Table 4.4* and *Figure 4.2*.

Monitoring Station ID	Monitoring Location	Measurement Type	Level (in terms of no. of floor)
CM1	Wellborn Kindergarten	Free field	G/F
CM2(B)	Kowloon City Baptist Church Hay Nien Primary School		
CM3	S.K.H. Ma On Shan Holy Spirit Primary School	Façade	Roof
CM4	Ah Kung Kok Fishermen Village	Free field	G/F
CM5	The Neighbourhood Advice-Action Council Harmony Manor	Façade	Roof

#### Table 4.4 Noise Monitoring Station

#### NOISE MONITORING PARAMETERS, FREQUENCY AND DURATION

- 4.2.5. Noise monitoring shall be carried out at all the designated monitoring stations. The monitoring frequency shall depend on the scale of the construction activities. The following is an initial guide on the regular monitoring frequency for each station on a weekly basis when noise generating activities are underway:
  - One set of measurements between 0700-1900 hours on normal weekdays;
  - One set of measurements between 1900-2300 hours;
  - One set of measurements between 2300-0700 hours of next day; and
  - One set of measurements between 0700-2300 hours on holidays (six consecutive Leq/5min readings).
- 4.2.6. If construction works are extended to include works during the hours of 1900-0700, additional weekly impact monitoring shall be carried out during evening and night-time works for the latter



3 sets of measurements specified in Section 4.2.4 above, one set of measurements shall at least include 6 consecutive Leq (5min) results.

- 4.2.7. Additional weekly noise monitoring was carried out at CM4 on 2, 12, 16, 26 and 29 June 2020 with respect to the restricted hour works under CNP GW-RN0287-20 and GW-RN0420-20. All the results are within the baseline level range after baseline correction.
- 4.2.8. Supplementary information for data auditing, statistical results such as L10 and L90 shall also be obtained for reference.
- 4.2.9. If a school exists near the construction activity, noise monitoring shall be carried out at the monitoring stations for the schools during the examination periods. The ET leader shall liaise with the school's personnel and the examination authority to ascertain the exact dates and times of all examination periods during the course of the contract.

# MONITORING EQUIPMENT

4.2.10. Noise monitoring was performed using sound level meter at the designated monitoring locations. The sound level meters shall comply with the International Electrotechnical Commission Publications 651:1979 (Type 1) and 804:1985 (Type 1) specifications. Acoustic calibrator shall be deployed to check the sound level meters at a known sound pressure level. Brand and model of the equipment is given in **Table 4.5**.

Equipment	Brand and Model
Integrated Cound Loval Mater	NTi XL2
Integrated Sound Level Meter	B&K2236
Acoustic Calibrator	Larson Davis CAL200

# Table 4.5 Noise Monitoring Equipment

4.2.11. The calibration certificates of the noise monitoring equipment are attached in Appendix 4.2.

# SAMPLING PROCEDURE AND MONITORING EQUIPMENT

- 4.2.12. Monitoring Procedure
  - (a) The monitoring station shall normally be at a point 1m from the exterior of the sensitive receiver's building façade and be at a position 1.2m above the ground.
  - (b) Façade measurements were made at the monitoring locations. For free-field measurement, a correction factor of +3 dB (A) would be applied.
  - (c) The battery condition was checked to ensure the correct functioning of the meter.
  - (d) Parameters such as frequency weighting, the time weighting and the measurement time were set as follows:



- (e) Frequency weighting: A, Time weighting: Fast, Measurement time set: continuous 5 mins
- (f) Prior and after to the noise measurement, the meter was checked using the acoustic calibrator for 94dB (A) at 1000 Hz. If the difference in the calibration level before and after measurement was more than ±1 dB (A), the measurement would be considered invalid and repeat of noise measurement would be required after re-calibration or repair of the equipment.
- (g) Noise measurements shall not be made in fog, rain, wind with a steady speed exceeding 5m/s or wind with gusts exceeding 10m/s. The wind speed shall be checked with a portable wind speed meter capable of measuring the wind speed in m/s.
- 4.2.13. Maintenance and Calibration
  - (a) The microphone head of the sound level meter was cleaned with soft cloth at regular intervals.
  - (b) The sound level meter and calibrator were calibrated at yearly intervals.

#### EVENT AND ACTION PLAN

4.2.14. Noise Standards for Daytime Construction Activities are specified under EIAO-TM. The Action and Limit levels for construction noise are defined in **Table 4.6** and <u>Appendix 4.1</u>. Should non-compliance of the criteria occurs, action in accordance with the Event and Action Plan in <u>Appendix 6.1</u> shall be carried out.

		Limit Level (dB(A))				
Monitoring Station	Action Level	0700-1900 hrs on normal weekdays	0700-2300 hrs on holidays (including Sundays); and 1900-2300 hrs on all days <sup>2</sup>	2300-0700 hrs of all days <sup>2</sup>		
CM1		65 / 70 <sup>1</sup>				
CM2(B)	When one documented	65 / 70 <sup>1</sup>				
CM3	complaint is	65 / 70 <sup>1</sup>	60 / 65 / 70 <sup>3</sup>	45 / 50 / 55 <sup>3</sup>		
CM4	received	75				
CM5		75				

# Table 4.6 Action and Limit Level for Noise Monitoring

Remark 1: Limit level of CM1, CM2(B) and CM3 reduce to 65 dB (A) during examination periods if any.

Remark 2: Construction noise during restricted hours is under the control of Noise Control Ordinance Limit Level to be selected based on Area Sensitivity Rating.

Remark 3: Limit Level for restricted hour monitoring shall act as reference level only. Investigation would be conducted on CNP compliance if exceedance recorded during restricted hour noise monitoring period.



### 5. Monitoring Results

- 5.0.1 The environmental monitoring will be implemented based on the division of works areas of each designed projects. Overall layout showing work areas and monitoring stations is shown in <u>Figure 2.1</u> and <u>Figure 4.1 4.2</u> respectively.
- 5.0.2 The environment monitoring schedules for reporting month and coming month are presented in <u>Appendix 5.1</u>.

#### 5.1 Air Monitoring Results

- 5.1.1 1-hour TSP monitoring was conducted at AM1, AM2, AM4 and AM5 in the reporting month. AM3(B) is proposed to EPD for approval, no monitoring for AM3(B) was conducted in the reporting period.
- 5.1.2 No action or limit level exceedance was determined in the reporting period at stations of AM1, AM2, AM4 and AM5
- 5.1.3 Air quality monitoring results measured in this reporting period for AM1, AM2, AM4 and AM5 are reviewed and summarized. Details of air monitoring results and graphical presentation can be referred in <u>Appendix 5.2.</u>

#### 5.2 Noise Monitoring Results

- 5.2.1 Noise monitoring was conducted at CM1, CM3, CM4 and CM5 in the reporting month. CM2(B) is proposed to EPD for approval, no monitoring for CM2(B) was conducted in the reporting period.
- 5.2.2 Additional weekly noise monitoring was carried out at CM4 on 2, 12, 16, 26 and 29 June 2020 with respect to the restricted hour works under CNP GW-RN0287-20 and GW-RN0420-20. All the results are within the baseline level range after baseline correction. Details of noise monitoring results and graphical presentation can be referred in **Appendix 5.3**.
- 5.2.3 No action or limit level exceedance was determined in the reporting period at stations of CM1, CM3, CM4 and CM5.
- 5.2.4 Noise monitoring results measured in this reporting period for CM1, CM3, CM4 and CM5 are reviewed and summarized. Details of noise monitoring results and graphical presentation can be referred in <u>Appendix 5.3</u>.

#### 5.3 Waste Management

5.3.1 The quantities of waste for disposal in the Reporting Period are summarized in **Table 5.1**. The Monthly Summary Waste Flow Table is shown in <u>Appendix 5.4</u>. Whenever possible, materials were reused on-site as far as practicable.

# Table 5.1 Details of Waste Disposal for Contract no. DC/2018/05



Waste Type	Quantity this month	Cumulative Quantity-to-Date	Disposal / Dumping Grounds
	1,072	5,359	Fill Bank at Tuen Mun Area 38
			HKHA's Contract No.20160310 &
Inert C&D materials disposed <b>, m</b> <sup>3</sup>	10,367	53,523	MTR Contract No. EB001878, NENT under EPD's Contract No. EP/SP/12/92, Highway Department's Contract No. HY/2012/06 & Tailor Recycled Aggregated Ltd. (Alternative Disposal Ground)
Inert C&D materials recycled, <b>m</b> <sup>3</sup>	13	160	Fill Bank at Tuen Mun Area 38 (Broken concrete)
Non-inert C&D materials disposed, tonne	79.87	536.02	NENT
Non-inert C&D materials	0	178	GOOD LUCK Services Ltd. (Waste paper)
recycled, kg	6	6	GOOD LUCK Services Ltd. (Metals)
Chemical waste disposed, L	0	320	Collected by licensed chemical waste collector_ Ecospace Limited
Asbestos waste disposed, Kg	0	0	



#### 6. Land Contamination

- 6.0.1 Based on the approved Supplementary Contamination Assessment Plan (SCAP), the Ex-Sha Tin Vehicle Detention Centre (VDC) site is identified as the only potential land contamination area within the project site.
- 6.0.2 **In** accordance with approved Contamination Assessment Report (CAR) and Remediation Assessment Plan (RAP) version 2.3, land decontamination at VDC was commenced in May 2020 at VDC, regular site inspection should be carried out to ensure the recommended mitigation measures are properly implemented. No site inspection was carried out from 2<sup>nd</sup> week of June 2020 since land decontamination works was temporary suspended due to waiting for the confirmatory sampling result. Remediation Report for VDC will be prepared by the Contractor, certified by ET Leader and verified by IEC before submission to EPD.



#### 7. Compliance Audit

- 7.0.1. The Event Action Plan for construction noise, air quality are presented in Appendix 7.1.
- 7.0.2. The summary of exceedance is presented in <u>Appendix 7.2.</u>

#### 7.1 Air Monitoring

7.1.1 No action or limit level exceedance was determined in the reporting period at stations of AM1, AM2, AM4 and AM5. AM3(B) is proposed to EPD for approval, no monitoring for AM3(B) was conducted in the reporting period.

#### 7.2 Noise Monitoring

- 7.2.1 Additional weekly noise monitoring was carried out at CM4 on 2, 12, 16, 26 and 29 June 2020 with respect to the restricted hour works under CNP GW-RN0287-20 and GW-RN0420-20. All the results are within the baseline level range after baseline correction.
- 7.2.2 No action or limit level exceedance was determined in the reporting period at stations of CM1, CM3, CM4 and CM5, CM2(B) is proposed to EPD for approval, no monitoring for CM2(B) was conducted in the reporting period.
- 7.3 Review of the Reasons for and the Implications of Non-compliance
- 7.3.1 No environmental non-compliance was recorded in the reporting month.
- 7.4 Summary of action taken in the event of and follow-up on non-compliance
- 7.4.1 There was no particular action taken since no non-compliance was recorded in the reporting period.



### 8. Environmental Site Audit

8.0.1. Within this reporting month, weekly environmental site audits were conducted on 4, 10, 17 and 23 June 2020. IEC attended the joint site inspection on 23 June 2020.

 Table 8.1
 Summary of Environmental Inspections for Contract no. SPW 25/2018

ltem	Date	Reminders/Observations	Action taken by Contractor	Outcome
20200604_01Env	4-6-2020	Portion 8: Excavation soil should be well covered	Excavation soil has been covered and removed off site	Completion as observed on 10 June 2020
20200610_01Env	10-6-2020	Portion 6: Sediment in the wastewater treatment tank should be cleared regulary	A pump truck has been arranged to pump out the slurry inside the sedimentation tank	Completion on 11 June 2020
20200610_02Env	10-6-2020	Portion 4: Muddy trail found on the Ah Kung Kok Street should be cleaned up more frequently	Water bowser has been arranged to cleaned the Ah Kung Kok Street regularly	Completion on 10 June 2020
20200617_01Env	17-6-2020	Portion 8: Proper treatment should be provided to the site runoff in the U-channel	Surface runoff stored inside the U-channel has been pumped to a grassland inside the construction site and soaked away	Completion on 17 June 2020
20200623_01Env	23-6-2020	Portion 11: Sand bag barriers should be provided to prevent surface run-off direct into the stream	Sand bags have been laid	Completion as observed on 2 July 2020

8.0.2. Within this reporting month, bi-weekly landscape site audits were conducted on 9 and 23 June 2020.

Table 8.2 Summary of Landscape Inspections for Contract no. SPW 25/201
--

Item	Date	Reminders/Observati ons	Action taken by Contractor	Outcome
N/A	N/A	N/A	N/A	N/A

8.0.3. Within this reporting month, monthly ecology site audits were conducted on 23 June 2020.

Table 8.3Summary of Ecology Inspections for Contract no. SPW 25/2018



ltem	Date	Reminders/Observations	Action taken by Contractor	Outcome
20200623_01Eco		Sign of damage by insect	Pending for	Pending for
		was observed one of E0004	contractor's follow	contractor's
			up action	follow
				up action

8.0.4. Within this reporting month, land decontamination site audits were conducted on 4 June 2020.

Table 8.4	Summary of Land	Decontamination	Inspections	for	Contract	no.	SPW
25/2018							

ltem	Date	Reminders/Observations	Action taken by Contractor	Outcome
N/A	N/A	N/A	N/A	N/A



### 9. Complaints, Notification of Summons and Prosecution

- 9.0.1. No notification of summons and successful prosecutions was received in the reporting month.
- 9.0.2. The details of cumulative complaint log and updated summary of complaints are presented in Appendix 9.1.
- 9.0.3. Cumulative statistic on complaints and successful prosecutions are summarized in **Table 9.1** and **Table 9.2** respectively.

#### Table 9.1 Cumulative Statistics on Complaints

Reporting Period	No. of Complaints
June 2020	0
Total	1

#### Table 9.2 Cumulative Statistics on Successful Prosecutions

Environmental Parameters	Cumulative No. Brought Forward	No. of Successful Prosecutions this month (Offence Date)	Cumulative No. Project-to-Date
Air	-	0	0
Noise	-	0	0
Waste	-	0	0
Total	-	0	0



### 10. Conclusion

- 10.0.1. The EM&A programme was carried out in accordance with the EM&A Manual requirements, minor alterations to the programme proposed were made in response to changing circumstances.
- 10.0.2. The scheduled construction activities and the recommended mitigation measures for the coming month are listed in **Table 10.1**. The construction programmes of the Project are provided in <u>Appendix 10.1</u>.


# Table 10.1Construction Activities and Recommended Mitigation Measures in ComingReporting Month

Key Construction Works Record	Recommended Mitigation Measures		
<ul> <li>installation and Community Liaison</li> <li>Ir</li> <li>Centre, excavation for temporary haul</li> <li>road construction, soil nail, retaining</li> <li>P</li> <li>wall construction, pipe jacking,</li> <li>drainage works, watermain</li> <li>installation, construction of steel</li> <li>bridge, ground investigation, tunnel</li> <li>works, construction of transformer</li> <li>room and land decontamination</li> <li>Root pruning and transplantation</li> </ul>	Dust control during dust generating works; mplementation of proper noise pollution control; nd Provision of protection to ensure no runoff out of ite area or direct discharge into public drainage ystem. Direct impact to plant species of conservation mportance recorded in the vicinity of the onstruction sites shall be avoided Excavation materials shall be well covered ditigation measures to dust and noise control hould be provided to construction of noise arrier and Community Liaison Centre		



Figure 2.1

Project Layout

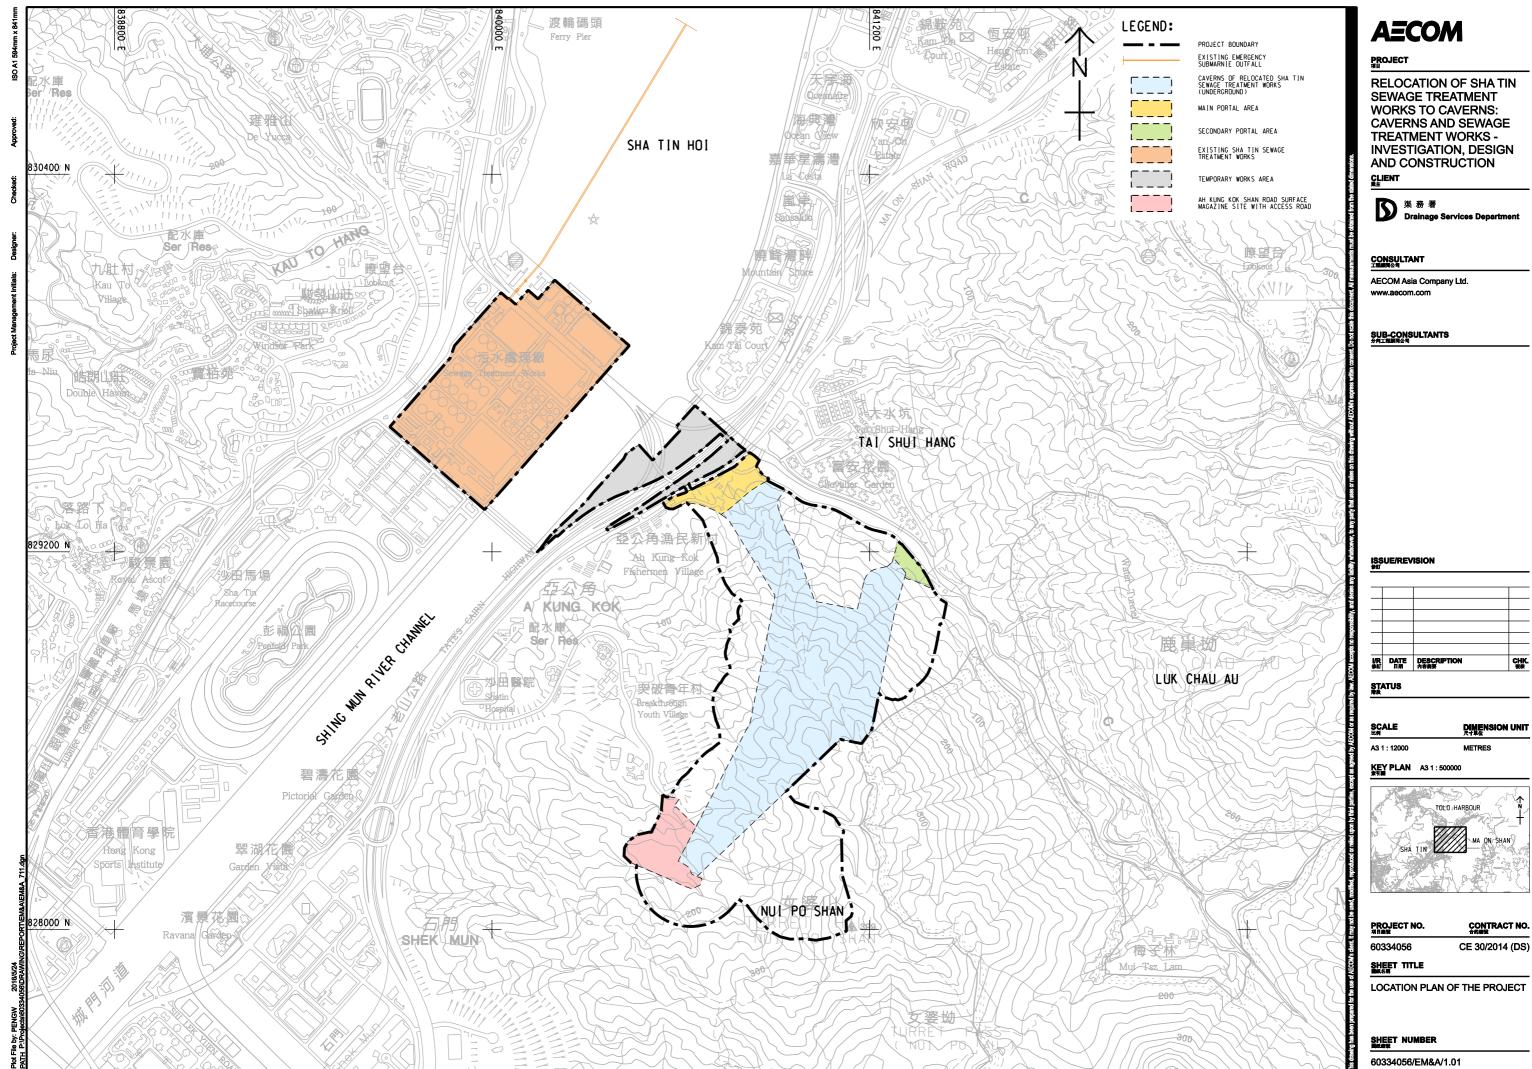





服翻	DATE 日期	DESCRIPTION 內容損要	CHK. 複枝
_			

ет	ATHE		
I/R 御	DATE 日期	DESCRIPTION 內容補要	CHK 複枝

о <b>т</b> .			
VR 参灯	DATE 日期	DESCRIPTION 內容損要	CHM 複数
_			

JS			

DIMENSION	UÞ



Figure 2.2

**Project Organization Chart** 



# Project Organization Chart


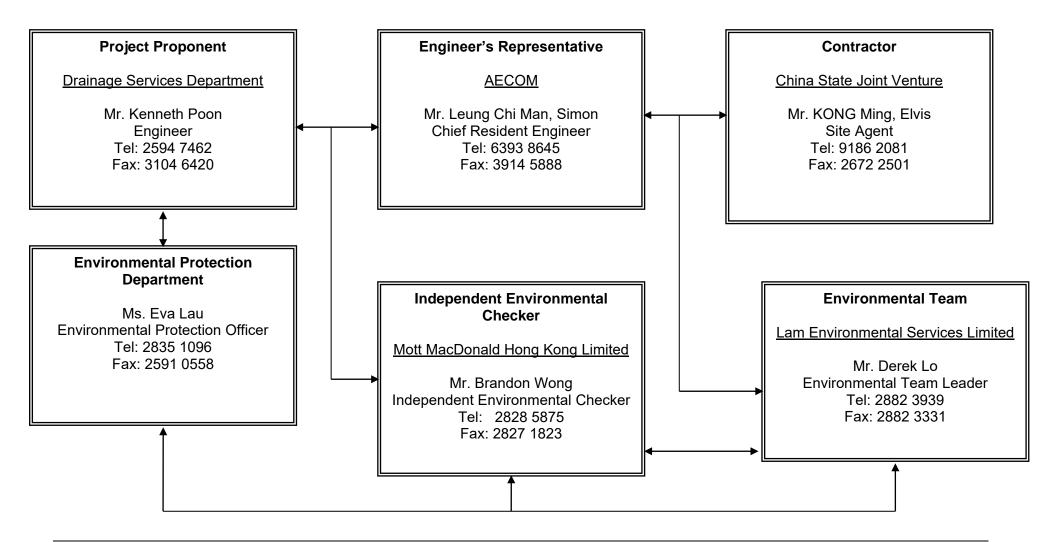




Figure 4.1 to Figure 4.2

Locations of Monitoring Stations



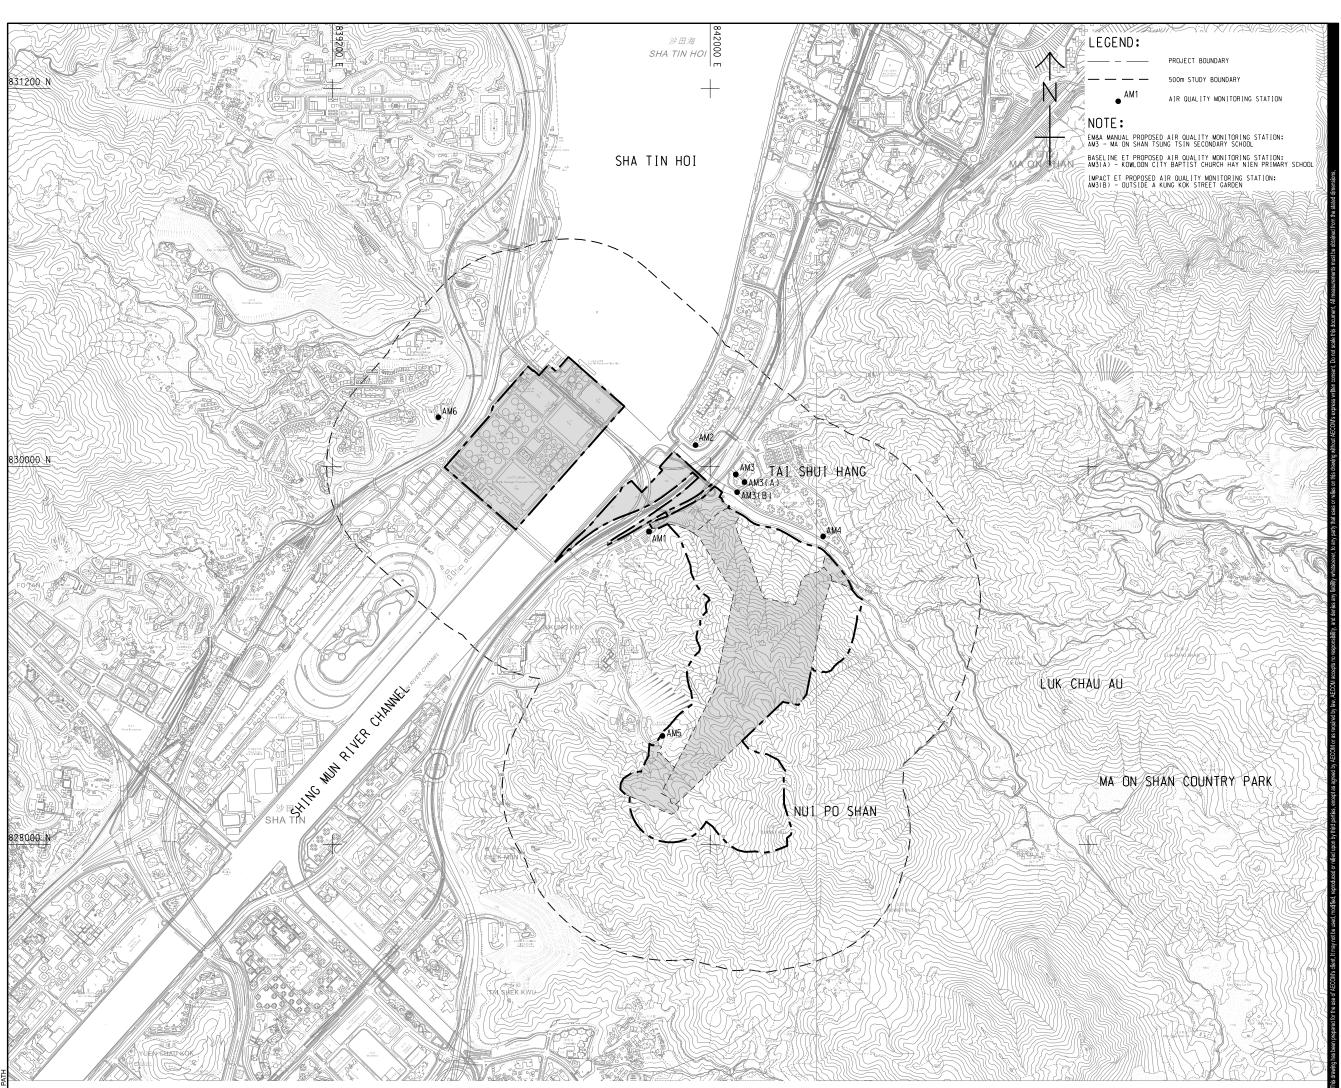

#### PROJECT

RELOCATION OF SHA TIN SEWAGE TREATMENT WORKS TO CAVERNS: CAVERNS AND SEWAGE TREATMENT WORKS -INVESTIGATION, DESIGN AND CONSTRUCTION CLIENT

 $\mathbf{\Sigma}$ 渠務署 Drainage Services Department

#### CONSULTANT

AECOM Asia Company Ltd. www.aecom.com

#### SUB-CONSULTANTS

#### ISSUE/REVISION

_			
-			
<b> /R</b> 修訂	DATE 日明	DESCRIPTION 內容摘要	CHK. 複核

#### STATUS


SCALE

#### DIMENSION UNIT

METRES

A3 1:16000

**KEY PLAN** A3 1 : 400000



#### PROJECT NO.

60334056

CONTRACT NO.


CE 30/2014 (DS)

SHEET TITLE

LOCATION OF AIR QUALITY MONITORING STATION DURING CONSTRUCTION PHASE

#### SHEET NUMBER

60334056/EM&A/2.01

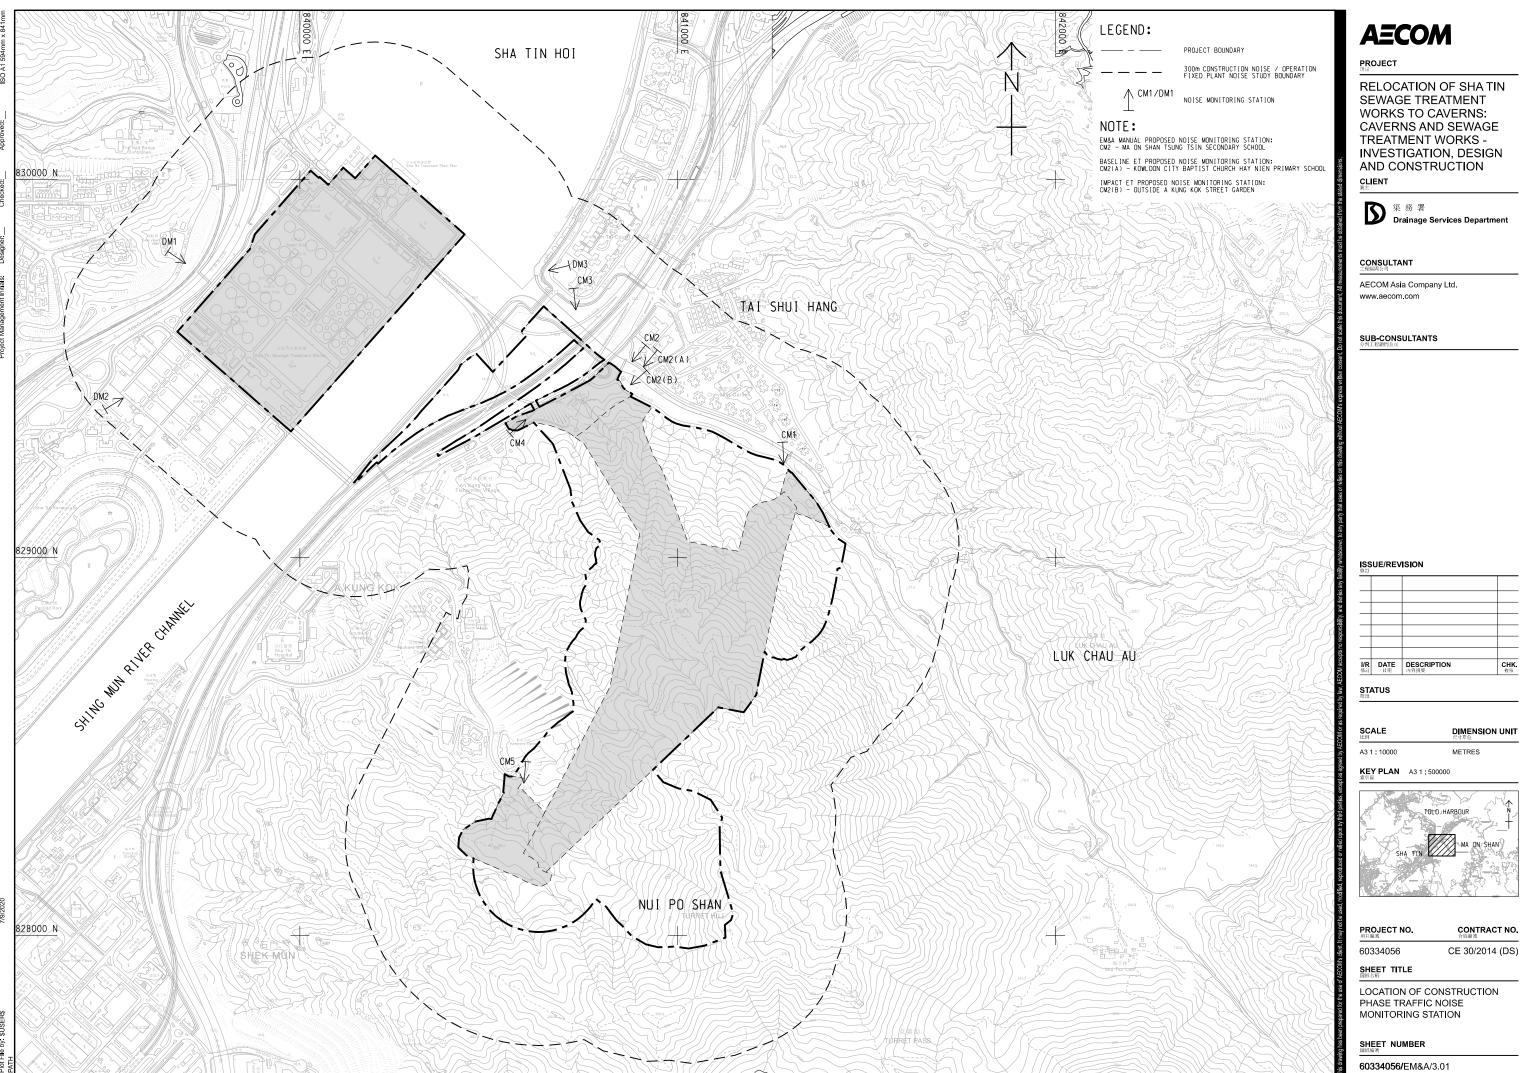



Appendix 1.1 Ecological Monitoring Report

# CONTRACT NO. SPW 25/2018

# ENVIRONMENTAL TEAM FOR RELOCATION OF SHA TIN SEWAGE TREATMENT WORKS TO CAVERNS – SITE PREPARATION AND ACCESS TUNNEL CONSTRUCTION

## UNDER ENVIRONMENTAL PERMIT NO. EP-533/2017

# 12<sup>th</sup> ECOLOGICAL MONITORING REPORT JUNE 2020

# **TABLE OF CONTENTS**

1. Recommendation on plant species of conservation importance under approved
protection and transplantation proposal3
2. Ecological monitoring
2.1 Pre-construction survey3
2.2 Transplantation3
2.3 One-year Establishment Period after Planting (Post-Transplantation Monitoring)4
2.4 Bi-weekly Ecological Monitoring5
FIGURES6
Figure 16
Figure 27
Figure 38
Figure 49
PLATE
Plate 1
TABLE
Table 1
Table 213
Table 3
Appendix 122
Appendix 225
Appendix 3

# 1. RECOMMENDATION ON PLANT SPECIES OF CONSERVATION IMPORTANCE UNDER APPROVED PROTECTION AND TRANSPLANTATION PROPOSAL

According to the approved Protection and Transplantation Proposal, four out of six recorded plant species of conservation importance are to be transplanted. They were summarized in **Table 1**.

## 2. ECOLOGICAL MONITORING

### 2.1 Pre-construction survey

As per Section 3.1 of the approved Protection and Transplantation Proposal, pre-construction survey shall be carried out by a qualified ecologist which includes: -

- (1) Desktop study and survey preparation based on the specific area of site clearance as notified by the construction contractor and confirmed with the Resident Site Staff;
- (2) Schedule and conduct physical site survey to locate the affected species, reconfirm the species condition and record the physical condition before transplantation; and
- (3) Report site survey results and provide recommendations to contractor on transplantation and post-transplantation maintenance.

### **Pre-construction survey implementation**

For the reporting month, there was no pre-construction survey according to work progress notified by the construction contractor.

## 2.2 Transplantation

Based on method statement in the approved Protection and Transplantation Proposal, transplantation works of the 1<sup>st</sup> batch of *Diospyros vaccinioides* (40 nos. of individuals) were commenced on 3 Aug 2019 and the 2<sup>nd</sup> batch of *Diospyros vaccinioides* (228 nos. individuals) at Portion 12 of Site 1 were commenced on 17 Feb 2020 by the Landscape Specialist Contractor, did not require onsite monitoring from ET's Ecologist as agreed. They were temporarily stored and kept at the nursery before being transplanted to designated planting area at Site 3.

Another 140 individuals that not suitable for transplantation was still retained at Portion 12 of Site 1.

### Transplantation implementation

The 1<sup>st</sup> batch of *Diospyros vaccinioides* transplantation involved 40 nos. of individuals originated from Site 1 (named as DV0001-DV0040) (**Figure 1**).

The 2<sup>nd</sup> batch of *Diospyros vaccinioides* transplantation involved 228 nos. of individuals is

commenced on 17 Feb 2020.

The nursery is an open cleared wasteland within Site 2 (**Figure 2**), a shelter was erected for the transplanted *Diospyros vaccinioides* against environmental stress. Each plant was tagged and lined up in rows (**Plate 1**). Water supply is ready for irrigation.

There was no construction activity during the reporting month at/ around the nursery.

### 2.3 One-year Establishment Period after Planting (Post-Transplantation Monitoring)

Regular monitoring of health condition of transplanted plants, also called post-transplantation monitoring, should be carried out in monthly basis in the first three months, quarterly afterwards during one-year establishment period after transplanting to receptor site/ nursery as per Section 5.4 and 5.5 of the approved Protection and Transplantation Proposal.

### Post-transplantation monitoring implementation

Post-transplantation monitoring for 2 batches of *Diospyros vaccinioides* and *Ania hongkongensis* (named as H0002) were conducted on 23 June 2020 at their corresponding receptor sites/ nursery (**Figure 2 and Figure 3**).

Monitoring for 1 no. of *Aquilaria sinensis* seedling (named as C0001) and 7 nos. of *Cibotium barometz* (grouped as E0004) were conducted on 23 June 2020 at a quarterly basis (**Figure 4**).

### Post-transplantation monitoring findings

Plant conditions of 1<sup>st</sup> batch DV0001-DV0040 and 2<sup>nd</sup> batch DV0001-DV0228 were listed in **Table 2a, 2b** and illustrated in **Appendix 1**. Some seedlings were generally tiny (about 10cm in height) aiming at smaller root zone and better survival. However, some of them have yet developed sufficient leaves. Sign of leaf drop and dehydration has been observed, despite provision of shelter and irrigation (**Plate 1**). Although tiny new branch or leaf buds were observed, seedlings may struggle for survival against environmental stress.

For C0001, E0004 and H0002, plant conditions were listed in **Table 3**, and corresponding photographic records were shown in **Appendix 2**. Despite root balls were maintained intact as far as possible, transplanted plants need time to grow into new soil of the receptor site. Therefore, sign of dehydration, leaf yellowing/ wilting, or even die-off were expected. Meanwhile, it is observed that site clearance was carried out in the continue patch of woodland surrounding receptor sites of H0002. A shelter has been set up for the transplanted plants to provide similar shading against adverse environmental condition (e.g. strong sunlight, rainstorm and construction dust). It is observed that organic soil conditioner was applied by the Contractor to H0002 in order to retain water moisture in the soil. On the other hand, sign of

damage by insect was observed on E0004.

#### Recommendation on post-transplantation monitoring maintenance

According to environmental condition and location of the receptor sites/ nursery, watering frequency was recommended in daily practice for at least the first 3 months as the transplant time is in summer months with strong sunlight and high temperature; except the days with fog and rain. Water frequency may be reduced based on the plant condition after monitoring in the first 3 months.

In contrast, the Landscape Contractor was recommended to check all transplanted plants after heavy rains/ typhoon under safe condition, in order to carry out any stabilization/ maintenance work. Blocked drainage shall be cleared; excessive water shall be pumped or diverged from nursery ground; saturated soil shall be aerated.

Other maintenance works (e.g. weeding, spraying off construction dust, use of approved pesticide and fertilization) shall be determined throughout the monitoring period in agreement with the Supervisor of the Contract and ET.

In response to the observed insect damage observed on E0004, appropriate horticultural treatment of spraying soap water (bio-degradable soap mixed with hot water in 1:60-70 ratio and cool down before spraying) once per week for 3-4 cycles with weekly monitoring is suggested to carry out. This help to access if the insect damage stop spreading to other *Cibotium barometz* individuals in vicinity.

## 2.4 Bi-weekly Ecological Monitoring

According to Section 6.4 of the approved Protection and Transplantation Proposal, regular ecological site inspection should be carried out at least once every two weeks during the construction period.

### Bi-weekly ecological monitoring implementation


Bi-weekly ecological monitoring was carried out on 9 and 23 June 2020 in the reporting month.


## Bi-weekly ecological monitoring findings

The patch of retained *Ania hongkongensis* (named as H0001) was observed in a fair condition during reporting period, with corresponding photos presented in **Appendix 3**. The protection zone of H0001 has been expanded due to additional individuals were observed. Landscape Contractor was reminded to carry out regular watering to the transplanted H0002.


### FIGURES

*Figure 1.* Original location of DV0001-DV0040 (1<sup>st</sup> batch) and DV0001-DV0228 (2<sup>nd</sup> batch) at Site 1.

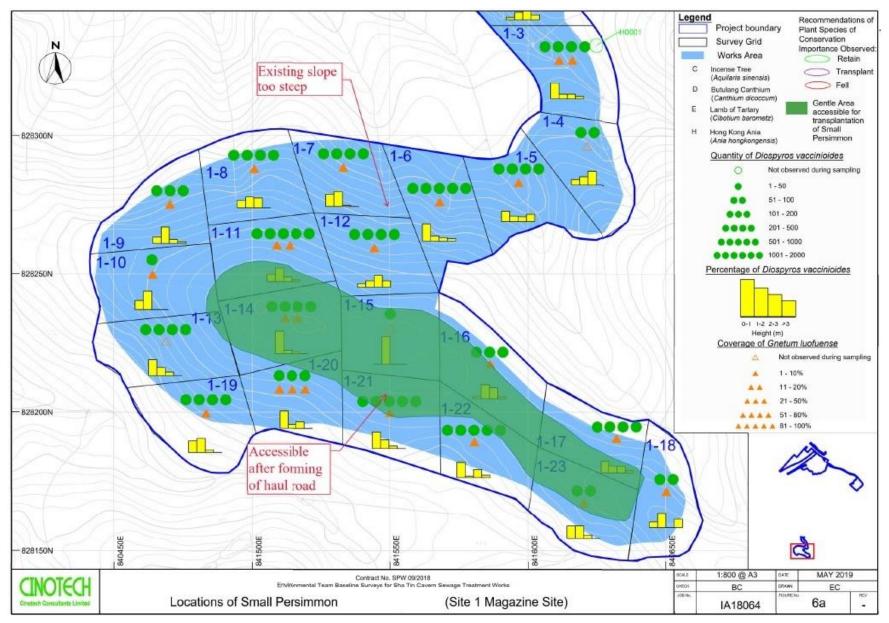


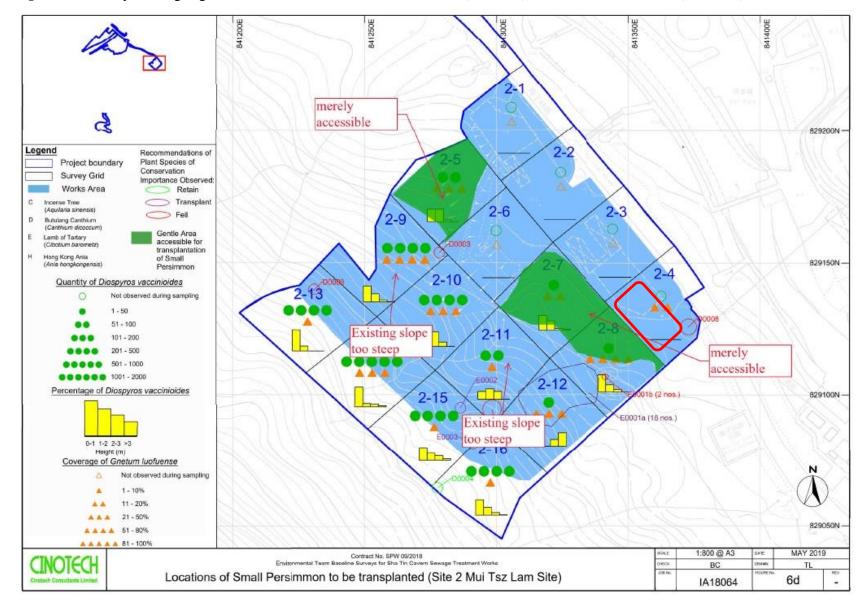

*Figure 2.* Nursery site highlighted in red frame for DV0001-DV0040 (1<sup>st</sup> batch) and DV0001-DV0228 (2<sup>nd</sup> batch) at Site 2.

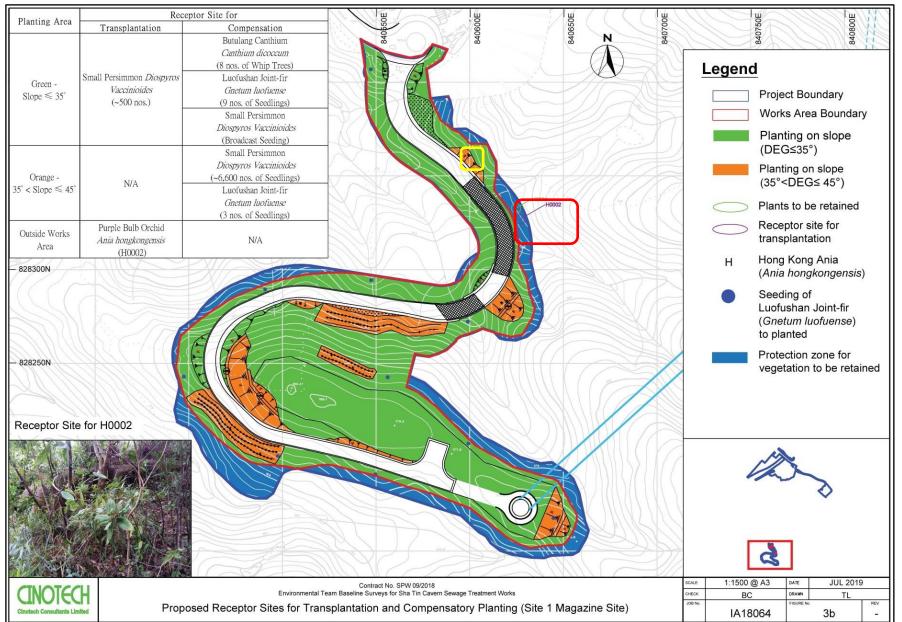

*Figure 3.* Original location of H0002 highlighted in yellow frame and its receptor site highlighted in red frame.

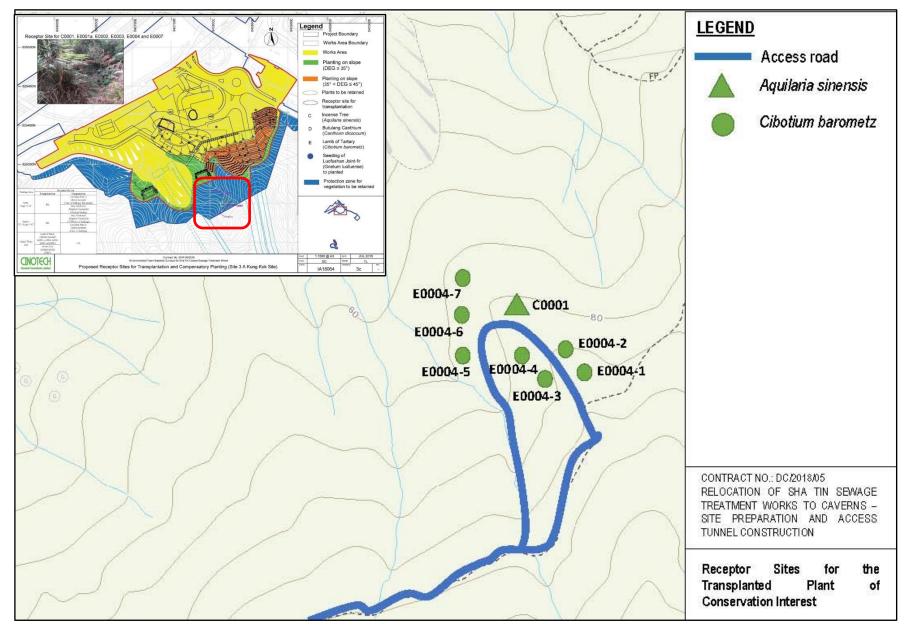

*Figure 4.* Receptor site for C0001 and E0004, the area highlighted in red frame is enlarged.

Ecological Monitoring Report for Contract No. SPW 25/2018 Relocation of Sha Tin Sewage Treatment Works to Caverns – Site Preparation and Access Tunnel Construction

### PLATE

*Plate 1.* The 2 batches of *Diospyros vaccinioides* transplanted from Site 1; stored by Landscape Specialist Contractor at the on-site nursery (left). Sign of leaf drop and dehydration has been observed in some transplanted individuals (right).



## TABLE

*Table 1.* Recommendations on the recorded plant species of conservation importance (adopted from previously approved Protection and Transplantation Proposal Version 7.1).

					Re	ecommenda	tions	
Common Name	Species Name	Units	Retain	Transplant	Tag No.		Total	
Common Mame	Species Maine	Units				Fell	(in Project	Transplantation Date
							Boundary)	
Site 1								
				350 (228		4800 (140		
				transplanted		confirmed		
				from Portion	DV0001-DV0228	at Portion		17/2/2020
Small Persimmon	Diospyros vaccinioides	No.	950	12)	(Batch 2)	12)	6100	Remaining 122
Luofushan Joint-fir	Gnetum luofuense	m2	300	0	NA	1700	2000	NA
Purple Bulb Orchid	Ania hongkongensis	No.	4	1	H0002	0	5	23/7/2019
Site 2								
Small Persimmon	Diamuna maccinicidae	No.	950	40	DV0001-DV0040	1500	2500	3/8/2019
Small Persiminon	Diospyros vaccinioides	INO.	950	10	D V 0001-D V 0040	1500	2500	Remaining 10
Luofushan Joint-fir	Gnetum luofuense	m2	300	0	NA	2500	2800	NA
Butulang Canthium	Canthium dicoccum	No.	1	0	NA	4	5	NA
Lamb of Tartary	Cibotium barometz	No.	0	19		2	21	TBC

Site 3								
Small Persimmon	Diospyros vaccinioides	No.	3700	100	TBC	7450	11100	TBC
Luofushan Joint-fir	Gnetum luofuense	m2	750	0	NA	1900	2650	NA
Butulang Canthium	Canthium dicoccum	No.	0	0	NA	4	4	NA
					E0004-1 ~			
Lamb of Tartary	Cibotium barometz	No.	101	7	E0004-7	50	158	12/7/2019
Incense Tree	Aquilaria sinensis	No.	0	1	C0001	0	1	12/7/2019

*Table 2a.* Conditions of the 1<sup>st</sup> batch transplanted *Diospyros vaccinioides* at nursery in post-transplantation monitoring.

Date of	No.	Form	Health	Structural	Amenity	Domonico
nonitoring	190.	Form	condition	condition	value	Remarks
	DV0001	Fair	Fair	Fair	Fair	
	DV0002	Fair	Fair	Fair	Fair	Leaf dropped; new buds observed
	DV0003	Fair	Fair	Fair	Fair	Leaf dropped; new buds observed
	DV0004	Fair	Fair	Fair	Fair	
	DV0005	Fair	Fair	Fair	Fair	
	DV0006	Fair	Fair	Fair	Fair	
	DV0007	Fair	Fair	Fair	Fair	
	DV0008	Fair	Fair	Fair	Fair	
	DV0009	Fair	Fair	Fair	Fair	
	DV0010	Fair	Fair	Fair	Fair	
	DV0011	Fair	Fair	Fair	Fair	
	DV0012	Fair	Fair	Fair	Fair	
	DV0013	Fair	Fair	Fair	Fair	
	DV0014	Fair	Fair	Fair	Fair	Leaf dropped; new buds observed
	DV0015	Fair	Fair	Fair	Fair	
	DV0016	Fair	Fair	Fair	Fair	
) and 22 Ium	DV0017	Fair	Fair	Fair	Fair	
and 23 Jun) 2020	DV0018	Fair	Fair	Fair	Fair	Leaf dropped
2020	DV0019	Fair	Fair	Fair	Fair	
	DV0020	Fair	Fair	Fair	Fair	
	DV0021	Fair	Fair	Fair	Fair	
	DV0022	Fair	Fair	Fair	Fair	
	DV0023	Fair	Fair	Fair	Fair	Leaf dropped
	DV0024	Fair	Fair	Fair	Fair	
	DV0025	Fair	Fair	Fair	Fair	
	DV0026	Fair	Fair	Fair	Fair	
	DV0027	Fair	Fair	Fair	Fair	
	DV0028	Fair	Fair	Fair	Fair	
	DV0029	Fair	Fair	Fair	Fair	
	DV0030	Fair	Fair	Fair	Fair	
	DV0031	Fair	Fair	Fair	Fair	
	DV0032	Fair	Fair	Fair	Fair	
	DV0033	Fair	Fair	Fair	Fair	
	DV0034	Fair	Fair	Fair	Fair	
	DV0035	Fair	Fair	Fair	Fair	
	DV0036	Fair	Fair	Fair	Fair	

DV003	7 Fair	Fair	Fair	Fair	
DV003	8 Fair	Fair	Fair	Fair	
DV003	9 Fair	Fair	Fair	Fair	Leaf dropped
DV004	0 Fair	Fair	Fair	Fair	

Note:

Height, spread and DBH is not applicable for undersized tree, shrubs and herbs.

<i>Table 2b.</i> Conditions of the 2 <sup>nd</sup> batch transplanted <i>Diospyros vaccinioides</i> at nursery in
post-transplantation monitoring.

Date of	NT	<b>F</b>	Health	Structural	Amenity	
monitoring	No.	Form	condition	condition	value	Remarks
	DV0001	Fair	Fair	Fair	Fair	
	DV0002	Fair	Fair	Fair	Fair	
	DV0003	Fair	Fair	Fair	Fair	Leaf dropped
	DV0004	Fair	Fair	Fair	Fair	
	DV0005	Fair	Fair	Fair	Fair	Leaf dropped; young leaves observed
	DV0006	Fair	Fair	Fair	Fair	
	DV0007	Fair	Fair	Fair	Fair	
	DV0008	Fair	Fair	Fair	Fair	
	DV0009	Fair	Poor	Fair	Fair	Leaf dropped; dehydrated
	DV0010	Fair	Fair	Fair	Fair	
	DV0011	Fair	Fair	Fair	Fair	
	DV0012	Fair	Fair	Fair	Fair	
0 and 22 Ium	DV0013	Fair	Fair	Fair	Fair	
9 and 23 Jun 2020	DV0014	Fair	Fair	Fair	Fair	
2020	DV0015	Fair	Fair	Fair	Fair	Leaf dropped
	DV0016	Fair	Fair	Fair	Fair	
	DV0017	Fair	Poor	Fair	Fair	Leaf dropped; dehydrated
	DV0018	Fair	Fair	Fair	Fair	
	DV0019	Fair	Fair	Fair	Fair	
	DV0020	Fair	Fair	Fair	Fair	
	DV0021	Fair	Fair	Fair	Fair	
	DV0022	Fair	Poor	Fair	Fair	Leaf dropped; dehydrated
	DV0023	Fair	Fair	Fair	Fair	
	DV0024	Fair	Fair	Fair	Fair	Leaf dropped
	DV0025	Fair	Fair	Fair	Fair	
	DV0026	Fair	Fair	Fair	Fair	
	DV0027	Fair	Fair	Fair	Fair	
	DV0028	Fair	Fair	Fair	Fair	Leaf dropped

	DV0029	Fair	Fair	Fair	Fair	Leaf dropped; young leaves observed
	DV0030	Fair	Fair	Fair	Fair	Leaf dropped; young leaves observed
	DV0031	Fair	Fair	Fair	Fair	
	DV0032	Fair	Fair	Fair	Fair	
	DV0033	Fair	Poor	Fair	Fair	Leaf dropped; dehydrated
	DV0034	Fair	Fair	Fair	Fair	
	DV0035	Fair	Fair	Fair	Fair	
	DV0036	Fair	Fair	Fair	Fair	
	DV0037	Fair	Fair	Fair	Fair	
	DV0038	Fair	Fair	Fair	Fair	Leaf dropped
	DV0039	Fair	Poor	Fair	Fair	Leaf dropped; dehydrated
	DV0040	Fair	Fair	Fair	Fair	
	DV0041	Fair	Fair	Fair	Fair	
	DV0042	Fair	Fair	Fair	Fair	
	DV0043	Fair	Fair	Fair	Fair	Leaf dropped
	DV0044	Fair	Fair	Fair	Fair	
	DV0045	Fair	Fair	Fair	Fair	
	DV0046	Fair	Fair	Fair	Fair	
	DV0047	Fair	Fair	Fair	Fair	
	DV0048	Fair	Fair	Fair	Fair	
	DV0049	Fair	Fair	Fair	Fair	
	DV0050	Fair	Fair	Fair	Fair	
	DV0051	Fair	Fair	Fair	Fair	
	DV0052	Fair	Fair	Fair	Fair	
	DV0053	Fair	Fair	Fair	Fair	
9 and 23 Jun	DV0054	Fair	Fair	Fair	Fair	
2020	DV0055	Fair	Fair	Fair	Fair	
	DV0056	Fair	Fair	Fair	Fair	
	DV0057	Fair	Fair	Fair	Fair	
	DV0058	Fair	Poor	Fair	Fair	Leaf dropped; dehydrated
	DV0059	Fair	Poor	Fair	Fair	Minor wilting
	DV0060	Fair	Fair	Fair	Fair	
	DV0061	Fair	Fair	Fair	Fair	
	DV0062	Fair	Fair	Fair	Fair	
	DV0063	Fair	Fair	Fair	Fair	
	DV0064	Fair	Fair	Fair	Fair	
	DV0065	Fair	Fair	Fair	Fair	
	DV0066	Fair	Fair	Fair	Fair	
	DV0067	Fair	Fair	Fair	Fair	
	DV0068	Fair	Fair	Fair	Fair	Leaf dropped

	DV0069	Fair	Fair	Fair	Fair	
	DV0070	Fair	Fair	Fair	Fair	
	DV0071	Fair	Fair	Fair	Fair	
	DV0072	Fair	Fair	Fair	Fair	
	DV0073	Fair	Fair	Fair	Fair	
	DV0074	Fair	Fair	Fair	Fair	
	DV0075	Fair	Poor	Fair	Fair	Leaf dropped; dehydrated
	DV0076		Fair	Fair	Fair	Leaf dropped
	DV0077	Fair	Fair	Fair	Fair	* *
	DV0078	Fair	Poor	Fair	Fair	Leaf dropped
	DV0079	Fair	Fair	Fair	Fair	Leaf dropped
	DV0080	Fair	Fair	Fair	Fair	* *
	DV0081	Fair	Fair	Fair	Fair	
	DV0082	Fair	Fair	Fair	Fair	
	DV0083	Fair	Fair	Fair	Fair	
	DV0084	Fair	Fair	Fair	Fair	
	DV0085	Fair	Poor	Fair	Fair	Leaf dropped; dehydrated
	DV0086	Fair	Fair	Fair	Fair	
	DV0087	Fair	Fair	Fair	Fair	
	DV0088	Fair	Fair	Fair	Fair	Leaf dropped
	DV0089	Fair	Fair	Fair	Fair	
	DV0090	Fair	Fair	Fair	Fair	
	DV0091	Fair	Fair	Fair	Fair	
	DV0092	Fair	Fair	Fair	Fair	
0 100 1	DV0093	Fair	Fair	Fair	Fair	
9 and 23 Jun	DV0094	Fair	Poor	Fair	Fair	Leaf dropped; dehydrated
2020	DV0095	Fair	Fair	Fair	Fair	
	DV0096	Fair	Fair	Fair	Fair	
	DV0097	Fair	Fair	Fair	Fair	
	DV0098	Fair	Poor	Fair	Fair	Leaf dropped; dehydrated
	DV0099	Fair	Fair	Fair	Fair	
	DV0100	Fair	Fair	Fair	Fair	
	DV0101	Fair	Fair	Fair	Fair	
-	DV0102	Fair	Fair	Fair	Fair	
	DV0103	Fair	Fair	Fair	Fair	
	DV0104	Fair	Fair	Fair	Fair	
	DV0105	Fair	Fair	Fair	Fair	Leaf dropped
	DV0106	Fair	Fair	Fair	Fair	
	DV0107	Fair	Fair	Fair	Fair	
	DV0108	Fair	Fair	Fair	Fair	

	DV0109	Fair	Fair	Fair	Fair	
	DV0110	Fair	Fair	Fair	Fair	
	DV0111	Fair	Fair	Fair	Fair	
	DV0112	Fair	Fair	Fair	Fair	
	DV0113	Fair	Fair	Fair	Fair	
	DV0114	Fair	Fair	Fair	Fair	
	DV0115	Fair	Fair	Fair	Fair	
	DV0116	Fair	Fair	Fair	Fair	
	DV0117	Fair	Fair	Fair	Fair	
	DV0118	Fair	Poor	Fair	Fair	Leaf dropped; dehydrated; young leaves observed
	DV0119	Fair	Fair	Fair	Fair	
	DV0120	Fair	Fair	Fair	Fair	Leaf dropped
	DV0121	Fair	Fair	Fair	Fair	
	DV0122	Fair	Fair	Fair	Fair	
	DV0123	Fair	Fair	Fair	Fair	
	DV0124	Fair	Fair	Fair	Fair	
	DV0125	Fair	Fair	Fair	Fair	
	DV0126	Fair	Fair	Fair	Fair	
	DV0127	Fair	Fair	Fair	Fair	
	DV0128	Fair	Fair	Fair	Fair	
	DV0129	Fair	Fair	Fair	Fair	Leaf dropped
	DV0130	Fair	Fair	Fair	Fair	
	DV0131	Fair	Fair	Fair	Fair	Leaf dropped
	DV0132	Fair	Fair	Fair	Fair	
9 and 23 Jun	DV0133	Fair	Fair	Fair	Fair	
2020	DV0134	Fair	Fair	Fair	Fair	
	DV0135	Fair	Fair	Fair	Fair	
	DV0136	Fair	Fair	Fair	Fair	
	DV0137	Fair	Fair	Fair	Fair	
	DV0138	Fair	Fair	Fair	Fair	
	DV0139	Fair	Fair	Fair	Fair	
	DV0140	Fair	Fair	Fair	Fair	
-	DV0141	Fair	Fair	Fair	Fair	
	DV0142	Fair	Fair	Fair	Fair	
	DV0143	Fair	Fair	Fair	Fair	
	DV0144	Fair	Fair	Fair	Fair	
	DV0145	Fair	Fair	Fair	Fair	
	DV0146	Fair	Fair	Fair	Fair	
	DV0147	Fair	Fair	Fair	Fair	

	DV0148	Fair	Fair	Fair	Fair	
	DV0149		Fair	Fair	Fair	
	DV0150		Fair	Fair	Fair	
	DV0151		Fair	Fair	Fair	
	DV0152		Poor	Fair	Fair	Leaf dropped
	DV0153		Fair	Fair	Fair	
	DV0154		Fair	Fair	Fair	
	DV0155		Fair	Fair	Fair	
	DV0156		Fair	Fair	Fair	
	DV0157		Fair	Fair	Fair	Leaf dropped
	DV0158		Fair	Fair	Fair	
	DV0159		Fair	Fair	Fair	
	DV0160		Fair	Fair	Fair	
	DV0161		Fair	Fair	Fair	
	DV0162		Fair	Fair	Fair	
	DV0102		Fair	Fair	Fair	
	DV0103		Fair	Fair	Fair	
	DV0104		Fair	Fair	Fair	
	DV0105		Fair	Fair	Fair	
	DV0100 DV0167		Fair	Fair	Fair	
	DV0107		Fair	Fair	Fair	
	DV0108		Fair	Fair	Fair	
	DV0109 DV0170		Fair	Fair	Fair	
	DV0171		Fair	Fair	Fair	Loof deserved
0 100 1	DV0172		Fair	Fair	Fair	Leaf dropped
9 and 23 Jun			Fair	Fair	Fair	
2020	DV0174		Fair	Fair	Fair	
	DV0175		Fair	Fair	Fair	
	DV0176		Fair	Fair	Fair	
	DV0177		Fair	Fair	Fair	
	DV0178		Fair	Fair	Fair	Leaf dropped
	DV0179		Fair	Fair	Fair	
	DV0180		Fair	Fair	Fair	
	DV0181		Fair	Fair	Fair	
	DV0182		Fair	Fair	Fair	
	DV0183		Fair	Fair	Fair	
	DV0184		Fair	Fair	Fair	
	DV0185		Fair	Fair	Fair	
	DV0186		Fair	Fair	Fair	
	DV0187	Fair	Fair	Fair	Fair	

	DV0188	Fair	Fair	Fair	Fair	
	DV0189	Fair	Fair	Fair	Fair	
	DV0190	Fair	Fair	Fair	Fair	
	DV0191	Fair	Fair	Fair	Fair	
	DV0192	Fair	Fair	Fair	Fair	
	DV0193		Fair	Fair	Fair	
	DV0194		Fair	Fair	Fair	
	DV0195		Fair	Fair	Fair	Leaf dropped
	DV0196		Fair	Fair	Fair	
	DV0197		Fair	Fair	Fair	
	DV0198	Fair	Fair	Fair	Fair	
	DV0199	Fair	Fair	Fair	Fair	
	DV0200		Fair	Fair	Fair	
	DV0201		Fair	Fair	Fair	
	DV0202		Fair	Fair	Fair	
	DV0203	Fair	Fair	Fair	Fair	Leaf dropped
	DV0204	Fair	Fair	Fair	Fair	
	DV0205	Fair	Fair	Fair	Fair	Leaf dropped; new buds observed
	DV0206	Fair	Fair	Fair	Fair	
	DV0207	Fair	Fair	Fair	Fair	Leaf dropped; young leaves observed
	DV0208	Fair	Fair	Fair	Fair	
	DV0209	Fair	Fair	Fair	Fair	
	DV0210	Fair	Fair	Fair	Fair	
	DV0211	Fair	Fair	Fair	Fair	Leaf dropped
	DV0212	Fair	Fair	Fair	Fair	
9 and 23 Jun	DV0213	Fair	Fair	Fair	Fair	
2020	DV0214	Fair	Fair	Fair	Fair	
	DV0215	Fair	Fair	Fair	Fair	Leaf dropped
	DV0216	Fair	Fair	Fair	Fair	
	DV0217	Fair	Fair	Fair	Fair	
	DV0218	Fair	Fair	Fair	Fair	Leaf dropped
	DV0219	Fair	Fair	Fair	Fair	
	DV0220	Fair	Poor	Fair	Fair	Dehydrated
	DV0221	Fair	Fair	Fair	Fair	
	DV0222	Fair	Fair	Fair	Fair	
	DV0223	Fair	Fair	Fair	Fair	
	DV0224	Fair	Fair	Fair	Fair	
	DV0225	Fair	Fair	Fair	Fair	
	DV0226	Fair	Fair	Fair	Fair	
	DV0227	Fair	Fair	Fair	Fair	

Note:

Height, spread and DBH is not applicable for undersized tree, shrubs and herbs.

*Table 3.* Conditions of the transplanted plants at receptor sites in post-transplantation monitoring.

Date of monitoring	No.	Form	Health condition	Structural condition		Remarks	
	C0001	Fair	Fair	Fair	Poor	Young leaves kept growing; sign of yellow foliage	
	E0004- 1	Fair	Fair	Fair	Fair	-	(next monitoring
	E0004- 2	Fair	Fair	Fair	Fair		will be scheduled in
23 Jun 2020	E0004- 3	Fair	Fair	Fair	Fair		Sept 2020); weekly
	E0004- 4	Fair	Fair	Fair	Fair		monitoring is suggested
	E0004- 5	Fair	Fair	Fair	Fair		during the treatment of
	E0004- 6	Fair	Fair	Fair	Fair	Some leaves drop	spraying (3-4
	E0004- 7	Fair	Fair	Fair	Fair	Sign of insect chewing on fronds observed	weeks)
27 Apr 2020	H0002	Fair	Fair	Fair	Fair		Quarterly monitoring (next monitoring will be scheduled in
							July 2020)

Note:


Height, spread and DBH is not applicable for undersized tree, shrubs and herbs.

# **APPENDIX 1**

# Photographic records of post-transplantation monitoring

on plants of conservation importance transplanted at nursery



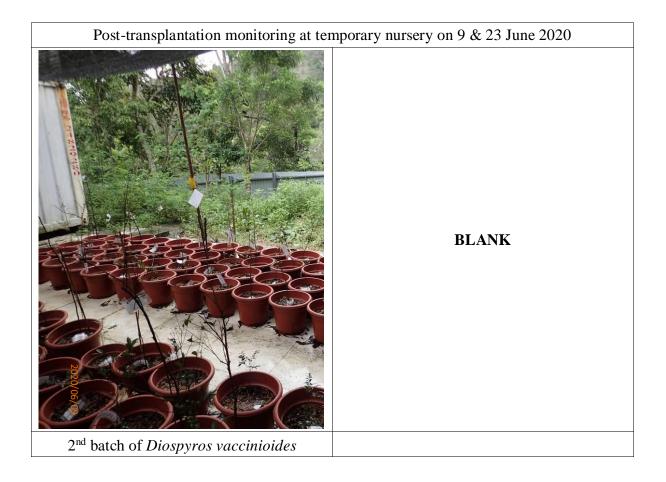

# **APPENDIX 2**

Photographic records of post-transplantation monitoring

on plants of conservation importance transplanted at receptor site








# **APPENDIX 3**

# Photographic records of bi-weekly ecological monitoring

On retained plants of conservation importance at Site 1

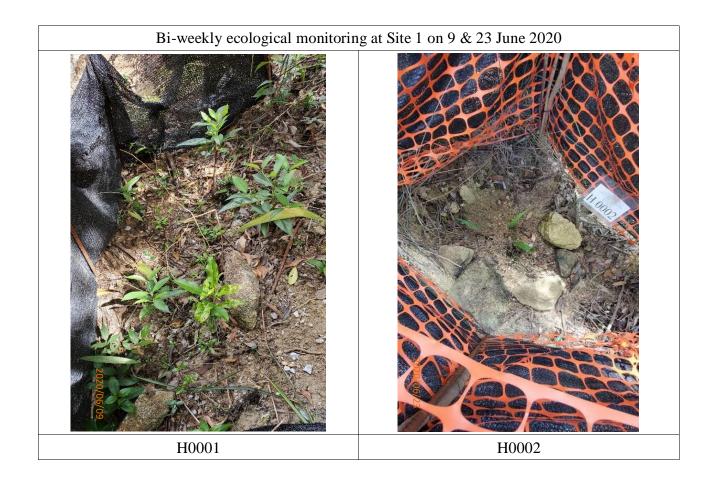



Appendix 3.1

Environmental Mitigation Implementation Schedule

#### APPENDIX C IMPLEMENTATION SCHEDULE OF RECOMMENDED MITIGATION MEASURES

#### C.1 Introduction

C.1.1 This section presents the implementation schedule of mitigation measures for the Project. **Table C.1** summarises the details of the recommended mitigation measures for all works areas. For each recommended mitigation measures, both the location and timing for the measure have clearly been identified as well as the parties responsible for implementing the measure and for maintenance (where applicable).

EIA Ref.	EM&A Log		Duration of Age	Implementation Agent	Implementation Stage <sup>1</sup>				Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	С	0	Dec	
	Air Qua	lity Impact							
	Construc	ction Phase							
Table 3.5	2.4.1	The rock crushing plant is configured as an enclosed system. Dust collector with dust removal efficiency of 99% will be provided at the exhaust of the rock crusher during rock crushing. Watering will be provided to maintain material in wet condition. Vehicles would be required to pass through the wheel washing facilities provided at site exit.	Rock Crushing Plant / Construction Phase	Contractor	1	$\checkmark$		1	Air Pollution Control Ordinance (APCO)
3.8.1	2.4.1	Watering eight times a day on active works areas, exposed areas and unpaved haul roads to reduce dust emission by 87.5%.	All active works areas, exposed areas and unpaved haul roads	Contractor		V		V	APCO

 Table C.1
 Implementation Schedule of Recommended Mitigation Measures

<sup>&</sup>lt;sup>1</sup> Des = Design; C = Construction; O = Operation; Dec = Decommissioning

EIA Ref.	EM&A Log		Location / Duration of Measures / Timing of Completion of Measures	Implementation Agent	Imple	ementa	ation S	tage <sup>1</sup>	Relevant Legislation & Guidelines
	Ref.				Des	С	0	Dec	
3.8.1	2.4.1	Dust suppression measures stipulated in the Air Pollution Control (Construction Dust) Regulation and good site practices:		Contractor		$\checkmark$		$\checkmark$	APCO and Air Pollution Control (Construction Dust) Regulation
		Use of regular watering to reduce dust emissions from exposed site surfaces and unpaved roads, particularly during dry weather.							
		Use of frequent watering for particularly dusty construction areas and areas close to ASRs.							
		• Side enclosure and covering of any aggregate or dusty material storage piles to reduce emissions. Where this is not practicable owing to frequent usage, watering shall be applied to aggregate fines.							
		Open stockpiles shall be avoided or covered. Where possible, prevent placing dusty material storage piles near ASRs.							
		• Tarpaulin covering of all dusty vehicle loads transported to, from and between site locations.							
		• Establishment and use of vehicle wheel and body washing facilities at the exit points of the site.							
		<ul> <li>Provision of wind shield and dust extraction units or similar dust mitigation measures at the loading area of barging point, and use of water sprinklers at the loading area</li> </ul>							

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	tion St	age 1	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	С	0	Dec	
		where dust generation is likely during the loading process of loose material, particularly in dry seasons/ periods.							
		• Provision of not less than 2.4m high hoarding from ground level along site boundary where adjoins a road, streets or other accessible to the public except for a site entrance or exit.							
		• Imposition of speed controls for vehicles on site haul roads.							
		• Where possible, routing of vehicles and positioning of construction plant should be at the maximum possible distance from ASRs.							
		• Every stock of more than 20 bags of cement or dry PFA should be covered entirely by impervious sheeting or placed in an area sheltered on the top and the 3 sides.							
		<ul> <li>Instigation of an environmental monitoring and auditing program to monitor the construction process in order to enforce controls and modify method of work if dusty conditions arise.</li> </ul>							

EIA Ref.	EM&A Log		Location / Duration of Measures / Timing of Completion of Measures	Implementation Agent	Implementation Stage <sup>1</sup>				Relevant Legislation & Guidelines
	Ref.				Des	С	0	Dec	
	Operatio	on Phase							
3.5.2	-	Sludge tanks with totally enclosed design proven by DSD should be deployed for transporting sludge. With thorough cleaning practice and regular condition test of the sludge tanks, odour emission and leachate leakage during storage and transportation are not anticipated.	Cavern Sewage Treatment Works (CSTW) / Operation Phase	Project Proponent / Operator	V		V		-
3.6.2, 3.7.2	2.4.2	All treatment units with potential odour emission will be covered and the exhausted air will be conveyed to the deodouriser (with 80 – 97% odour removal efficiency) for treatment before discharge to the environment.	CSTW / Operation Phase	Design team / Project Proponent / Operator	V		1		-
3.7.2	2.4.2	<ul> <li>The following appropriate odour control measures would be implemented.</li> <li>(i) Adopting the advantage of caverns as natural barriers for odour control;</li> <li>(ii) Covering up of odour sources;</li> <li>(iii) Preventing odour leakage through the access tunnels by applying negative pressure inside caverns;</li> <li>(iv) Installing deodourizing units to clean up the collected foul air;</li> <li>(v) Discharging exhausted air at height to further enhance the dilution effect; and</li> <li>(vi) Enhancing the odour management of the sludge transportation.</li> </ul>	CSTW / Operation Phase	Design team / Project Proponent / Operator	1		V		-

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of Measures / Timing of Completion of Measures	Implementation Agent	Imple	ementa	ation St	age 1	Relevant Legislation & Guidelines		
	Ref.				Des	С	0	Dec			
3.10.2	2.3.1	Odour monitoring at the inlet and outlet of the deodourizing units is proposed to be conducted for first three years of the operation of CSTW, quarterly in the first year, and once every 6 months in the second and third years if monitoring results remain below the limit levels.	CSTW / Operation Phase	Project Proponent / Operator	V		V		-		
3.10.2	2.3.2	An Odour Complaint Registration System is also proposed in the EM&A programme to check whether the deodorizing units can fulfill the recommended odour removal performance.	CSTW / Operation Phase	Operator			V		-		
3.10.2	-	Any unexpected leakage from tanks could be observed with monitoring equipment. Monitoring equipment would be installed in the CSTW to monitor the concentration of $H_2S$ , CO and CO <sub>2</sub> and methane. Investigation and repair works would be carried out immediately if abrupt increase of these concentrations are reported. Emergency Plan would be established for these upset conditions.	CSTW / Operation Phase	Project Proponent / Operator	1		V		-		
	Noise Ir	Noise Impact									
	Constru	ction Phase									
4.5.1.6	-	Re-provision of 220m length noise barrier with 10mPD on temporary access haul road to replace the existing 150m length noise barrier with 9.2mPD to 10mPD on Ma On Sha Road. The	Proposed temporary access / Construction Phase	Contractor		$\checkmark$			Technical Memorandum on Environmental Impact Assessment Process (EIAO-TM), Noise Control Ordinance (NCO)		

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	tion St	tage 1	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	C	0	Dec	
		location of the relocated noise barrier is shown in <b>Figure No.</b> <b>60334056/EIA/4.02</b> and <b>Appendix</b> <b>4.07</b> . Once the construction work for the CSTW is completed, the temporary access roads would be demolished and the relevant section of Ma On Shan Road and associated noise barrier would be recovered as before.							
4.8.1	3.8.1	The use of quiet plant associated with the construction works is prescribed in British Standard "Code of practice for noise and vibration control on construction and open sites, BS5228" which contains the SWLs for specific quiet PME.	All Construction Work Sites	Contractor		$\checkmark$		V	EIAO-TM, NCO
4.8.1	3.8.1	To alleviate the construction noise impact on the affected NSRs, movable noise barrier for Air Compressor, Bar Bender and Cutter, Breaker, Chisel, Saw, Compactor, Mixers, Pump, Crane, Desander, Drilling Rig, Dump Truck, Excavator, Generator, Grab, Lorry, Paver, Poker and Roller are proposed.	All Construction Work Sites	Contractor		$\checkmark$		V	EIAO-TM, NCO
4.8.1	3.8.1	Provision of noise barrier/acoustic mats for Drilling Jumbo so as to have screening effecting with 10 dB(A) noise attenuation	Drilling Jumbo operate outside the portal and within 20m inside the portal	Contractor		$\checkmark$			EIAO-TM, NCO
4.8.1	3.8.1	To further alleviate the construction noise impact on the Neighbourhood Advice-Action Council Harmony	Construction Site for access road for	Contractor		$\checkmark$		$\checkmark$	EIAO-TM, NCO

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	tion St	age 1	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	C	0	Dec	
		Manor, it is proposed to limit the number of on-time operating PMEs within 120m of this NSR during construction of access road.	magazine at A Kung Kok Road						
4.9.1	3.8.1	In addition to the above-mentioned mitigation measures, good site practices listed below shall be adopted by all the contractors to further ameliorate the noise impacts.	All Construction Work Sites	Contractor		V		$\checkmark$	EIAO-TM, NCO
		• Only well-maintained plant should be operated on-site and plant should be serviced regularly during the construction program.							
		• Silencers or mufflers on construction equipment should be utilised and should be properly maintained during the construction program.							
		• Mobile plant, if any, should be sited as far away from NSRs as possible.							
		• Machines and plant (such as trucks) that may be in intermittent use should be shut down between works periods or should be throttled down to a minimum.							
		• Plant known to emit noise strongly in one direction should, wherever possible, be orientated so that the noise is directed away from the nearby NSRs.							

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	ation St	age 1	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	С	0	Dec	
		Material stockpiles and other structures should be effectively utilised, wherever practicable, in screening noise from on-site construction activities.							
	Operatio	n Phase							
4.7.4	3.8.2	The maximum allowable sound power levels for the ventilation shaft, ventilation buildings at main portal and emergency portal, ventilation fan for chiller plant room and cooling tower at the administration building as presented in Table 4.16 of the EIA Report should be achieved such that the nearest affected NSRs can be in compliance with the noise criteria	Ventilation Shaft, Administration Building and Ventilation Buildings/ Operation Phase	Project Proponent	~		~		EIAO-TM, NCO
4.11.2	3.8.2	Prior to the operational phase of the Project, a commissioning test for the ventilation buildings, the ventilation shaft, ventilation fan for chiller plant room at administration building and cooling tower at the administration building would be conducted to ensure compliance with the relevant allowable maximum sound power levels.	Ventilation Shaft, Administration Building and Ventilation Buildings/ Operation Phase	Contractor			V		EIAO-TM, NCO

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	tion St	tage 1	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	С	0	Dec	
	Water C	auality Impact							
	Constru	ction Phase							
5.7.2	4.10	Water used in ground boring and drilling for site investigation or rock / soil anchoring should as far as practicable be re-circulated after sedimentation. When there is a need for final disposal, the wastewater should be discharged into storm drains via silt removal facilities.	Construction Sites / Construction Phase	Contractor		$\checkmark$			Water Pollution Control Ordinance (WPCO), EIAO-TM
5.7.2	4.10	All vehicles and plant should be cleaned before they leave a construction site to minimise the deposition of earth, mud, debris on roads. A wheel washing bay should be provided at every site exit if practicable and wash-water should have sand and silt settled out or removed before discharging into storm drains. The section of construction road between the wheel washing bay and the public road should be paved with backfill to reduce vehicle tracking of soil and to prevent site run-off from entering public road drains.	Construction Sites / Construction Phase	Contractor		$\checkmark$			Professional Persons Environmental Consultative Committee (ProPECC) Practice Note (PN) 1/94, WPCO, Waste Disposal Ordinance (WDO)
5.7.2	4.10	Good site practices should be adopted to remove rubbish and litter from construction sites so as to prevent the rubbish and litter from spreading from the site area. It is recommended to clean the construction sites on a regular basis.	Construction Sites / Construction Phase	Contractor		$\checkmark$			WPCO, EIAO-TM

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	ation St	age 1	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	C	0	Dec	
5.7.2	4.10	The site practices outlined in ProPECC PN 1/94 "Construction Site Drainage" should be followed where applicable to minimise surface run-off and the chance of erosion.	Construction Sites / Construction Phase	Contractor		V			WPCO, EIAO-TM, ProPECC PN 1/94
5.7.2	4.10	There is a need to apply to EPD for a discharge licence for discharge of effluent from the construction site under the WPCO. The discharge quality must meet the requirements specified in the discharge licence. All the runoff and wastewater generated from the works areas should be treated so that it satisfies all the standards listed in the Technical Memorandum on Standards for Effluents Discharged into Drainage and Sewerage Systems, Inland and Coastal Waters (TM-DSS). The beneficial uses of the treated effluent for other on-site activities such as dust suppression, wheel washing and general cleaning etc., can minimise water consumption and reduce the effluent discharge volume. If monitoring of the treated effluent quality from the works areas is required during the construction phase of the Project, the monitoring should be carried out in accordance with the relevant WPCO licence which is under the ambit of RO of EPD.	Construction Sites / Construction Phase	Contractor		V			WPCO, EIAO-TM, (TM- DSS)
5.7.2	4.10	Contractor must register as a chemical waste producer if chemical wastes would be produced from the	Construction Sites / Construction Phase	Contractor		$\checkmark$			WPCO, EIAO-TM, WDO

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	ation St	age 1	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	С	0	Dec	
		construction activities. The Waste Disposal Ordinance (Cap 354) and its subsidiary regulations in particular the Waste Disposal (Chemical Waste) (General) Regulation, should be observed and complied with for control of chemical wastes.							
5.7.2	4.10	Any service shop and maintenance facilities should be located on hard standings within a bonded area, and sumps and oil interceptors should be provided. Maintenance of vehicles and equipment involving activities with potential for leakage and spillage should only be undertaken within the areas appropriately equipped to control these discharges.	Construction Sites / Construction Phase	Contractor		V			WPCO, EIAO-TM
5.7.2	4.10	Disposal of chemical wastes should be carried out in compliance with the Waste Disposal Ordinance. The Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes published under the Waste Disposal Ordinance should be followed to avoid leakage or spillage of chemicals.	Construction Sites / Construction Phase	Contractor		V			WPCO, EIAO-TM, WDO
5.7.2	4.10	Sufficient chemical toilets should be provided in the works areas. A licensed waste collector should be deployed to clean the chemical toilets on a regular basis.	Construction Sites / Construction Phase	Contractor		V			WPCO, EIAO-TM

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	tion St	tage <sup>1</sup>	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	C	0	Dec	
5.7.2	4.10	Notices should be posted at conspicuous locations to remind the workers not to discharge any sewage or wastewater into the surrounding environment.	Construction Sites / Construction Phase	Contractor		V			WPCO, EIAO-TM
5.7.2	4.10	The practices outlined in ETWB TC (Works) No. 5/2005 "Protection of natural streams/rivers from adverse impacts arising from construction works" should also be adopted where applicable to minimise the water quality impacts upon any natural streams or surface water systems.	Construction Sites / Construction Phase	Contractor		$\checkmark$			WPCO, EIAO-TM, ETWB TC (Works) No. 5/2005
5.7.2	4.10	Appropriate measures during the construction of the cavern construction should be implemented to minimise the groundwater infiltration.	Construction Sites / Construction Phase	Contractor		V			WPCO, EIAO-TM
5.7.2	4.10	No directly discharge of groundwater from contaminated areas should be adopted. Prior to any excavation works within the potentially contaminated areas at the existing STSTW site, the baseline groundwater quality in these areas should be reviewed based on the relevant SI data and any additional groundwater quality measurements to be performed with reference to <i>Guidance Note for Contaminated Land</i> <i>Assessment and Remediation</i> and the review results should be submitted to EPD for examination. If the review results indicated that the groundwater to be generated from the excavation	Construction Sites / Construction Phase	Contractor		~			WPCO, EIAO-TM, Guidance Note for Contaminated Land Assessment and Remediation

EIA Ref.	EM&A Log	A Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	tion St	age <sup>1</sup>	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	С	0	Dec	
		works would be contaminated, this contaminated groundwater should be either properly treated or properly recharged into the ground in compliance with the requirements of the TM-DSS. If wastewater treatment is to be deployed for treating the contaminated groundwater, the wastewater treatment unit shall deploy suitable treatment processes (e.g. oil interceptor / activated carbon) to reduce the pollution level to an acceptable standard and remove any prohibited substances (such as TPH) to an undetectable range. All treated effluent from the wastewater treatment plant shall meet the requirements as stated in TM-DSS and should be either discharged into the foul sewers or tankered away for proper disposal.							
5.7.2	4.10	If deployment of wastewater treatment is not feasible for handling the contaminated groundwater, groundwater recharging wells should be installed as appropriate for recharging the contaminated groundwater back into the ground. The recharging wells should be selected at places where the groundwater quality will not be affected by the recharge operation as indicated in section 2.3 of the TM-DSS. The baseline groundwater quality should be determined prior to the selection of the recharge wells, and submit a working plan to EPD for agreement. Pollution	Construction Sites / Construction Phase	Contractor		~			WPCO, EIAO-TM, TM- DSS

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	tion St	age <sup>1</sup>	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	С	0	Dec	
		levels of groundwater to be recharged shall not be higher than pollutant levels of ambient groundwater at the recharge well. Groundwater monitoring wells should be installed near the recharge points to monitor the effectiveness of the recharge wells and to ensure that no likelihood of increase of groundwater level and transfer of pollutants beyond the site boundary. Prior to recharge, free products should be removed as necessary by installing the petrol interceptor. The Contractor should apply for a discharge licence under the WPCO through the Regional Office of EPD for groundwater recharge operation or discharge of treated groundwater							
5.7.2	4.10	THEES connection works should be synchronized with the THEES maintenance, for a duration not longer than 4 weeks each outside the algae blooming season (January to May) and frequency of THEES maintenance shall be no more than once per year during the construction phase of the Project.	Tolo Harbour / Construction Phase	Project Proponent / Contractor	$\checkmark$	$\checkmark$			EIAO-TM
	Construe	ction and Operation Phases		·					
5.10.2	4.10	Shutdown of the THEES for maintenance should be shortened as far as possible. It is recommended that the maintenance of the THEES tunnel should be avoided during the algae blooming season (January to May).	Tolo Harbour / Construction and Operation Phase	Project Proponent		V	V		WPCO, EIAO-TM

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	ation St	tage <sup>1</sup>	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	С	0	Dec	
5.10.2	4.10	Relevant government departments including EPD, WSD, AFCD as well as the key stakeholders for mariculture and fisheries in Tolo Harbour should be informed of the maintenance event prior to any discharge.	Tolo Harbour / Construction and Operation Phase	Project Proponent		$\checkmark$	V		WPCO, EIAO-TM
5.10.3	4.2-4.5	An event and action plan and a water quality monitoring programme (as presented in the EM&A Manual) should be implemented for the THEES maintenance discharge	Tolo Harbour / Construction and Operation Phase	Project Proponent		V	V		WPCO, EIAO-TM
5.10.1	4.10	Silt screen may be installed at the flushing water intakes during the THEES maintenance discharge should it appear necessary. Close communication between DSD and WSD should be maintained to minimize any impact on the flushing water intakes due to THEES maintenance discharge.	WSD flushing water intakes / Construction and Operation Phase	WSD / Project Proponent		V	V		WPCO, EIAO-TM
	Design a	and Operation Phases							
5.8.3	4.6	In case adverse impact on KTN is identified based on the result of the three-month monitoring programme after commissioning of the project, the operation conditions of the treatment and THEES system should be investigated, and corrective and remedial action should be implemented to improve the effluent discharge from the CSTW. Furthermore, DSD should extend the water quality monitoring	Project site / Design and Operation Phases	Project Proponent			~		WPCO, EIAO-TM

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	tion St	age 1	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	C	0	Dec	
		programme for at least three months or as agreed by the Director of Environmental Protection.							
5.11.2	4.10	Dual power supply or ring main supply from CLP Power Hong Kong Ltd. CLP should be provided for the CSTW to prevent the occurrence of power failure. In addition, standby facilities for the main treatment units and standby equipment parts / accessories should also be provided in order to minimise the chance of emergency discharge. CLP should be consulted in order to ascertain the power supply for normal plant operation within the caverns. It is recommended that government departments including EPD, WSD and AFCD as well as the key stakeholders for mariculture and fisheries in Tolo Harbour should be informed as soon as possible in case of any emergency discharge so that appropriate actions can be taken.	Project site / Design and Operation Phases	Project Proponent	1		V		WPCO, EIAO-TM
5.11.2	4.10	In case of emergency discharge, the plant operators of CSTW should carry out necessary follow-up actions according to the procedures of the current contingency plan formulated for the existing STSTW to minimise the water quality impact.	Project site / Operation Phase	Project Proponent			$\checkmark$		WPCO, EIAO-TM
5.11.2	4.10	WSD may also consider, should it appear necessary, to shut down the Sha Tin seawater pumping station for a short period of time in case of	Sha Tin seawater pumping station / Operation Phase	WSD / Project Proponent			$\checkmark$		WPCO, EIAO-TM

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	ation St	age 1	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	С	0	Dec	
		emergency discharge in order to minimize any adverse impacts.							
5.13.2	4.10	<ul> <li>Best Management Practices to reduce storm water and non-point source pollution are also proposed as follows: <u>Design Measures</u></li> <li>Exposed surface shall be avoided within the road and portal sites to minimise soil erosion. The access road and the portal areas shall be either hard paved or covered by landscaping area where appropriate.</li> <li>Streams near the Project site will be retained to maintain the original flow path. The drainage system will be designed to avoid flooding.</li> <li>Green areas / planting etc. should be introduced alongside the access road and within the portal areas, as far as possible, to minimise runoff pollution.</li> </ul>	Project site / Design and Operation Phase	Project Proponent	~		V		WPCO, ProPECC PN 5/93
		<ul> <li><u>Devices/ Facilities to Control Pollution</u></li> <li>Screening facilities such as standard gully grating and trash grille, with spacing which is capable of screening off large substances such as fallen leaves and rubbish should be provided at the inlet of drainage system.</li> <li>Road gullies with standard design and silt traps should be provided to</li> </ul>							

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	tion St	age 1	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	С	0	Dec	
		remove particles present in stormwater runoff, where appropriate.							
		Administrative Measures							
		<ul> <li>Good management measures such as regular cleaning and sweeping of road surface/ open areas are suggested. The road surface/ open area cleaning should also be carried out prior to occurrence rainstorm.</li> </ul>							
		• Manholes, as well as stormwater gullies, ditches provided at the Project site should be regularly inspected and cleaned (e.g. monthly). Additional inspection and cleansing should be carried out before forecast heavy rainfall.							
	Land Co	ontamination							
6.7.1	-	Further site walkover and/or detailed land contamination assessment will be required for sites that are inaccessible or currently in operation / yet to be constructed (i.e. existing STSTW, David Camp and part of existing Sha Tin VDC, and proposed A Kung Kok Shan Road surface magazine site within the Project boundary). The site walkover, detailed land contamination assessment and if necessary, remediation works should be carried out after decommissioning of the sites	Existing STSTW, David Camp and VDC / Construction Phase	Project Proponent / Contractor		√		√ (for exist ing STS TW)	Guidance Note for Contaminated Land Assessment and Remediation, Practice Guide for Investigation and Remediation of Contaminated Land, Guidance Manual for Use of Risk-based Remediation Goals for Contaminated Land Management

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	ition St	tage <sup>1</sup>	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	C	0	Dec	
		but prior to re-development and should include the following:							
		• Prior to the commencement of the SI works, review the CAP to confirm whether the proposed SI works (e.g. sampling locations, testing parameters etc.) are still valid and to confirm the appropriate RBRGs land use scenario for the development;							
		<ul> <li>Submit supplementary CAP(s), presenting the findings of the above review for EPD endorsement. If land contamination issues were identified within David Camp or part of existing VDC / proposed A Kung Kok Shan Road surface magazine site within the Project boundary in the further site walkover, findings of the site walkover and the proposal for SI works should also be presented in the supplementary CAP(s);</li> </ul>							
		<ul> <li>Carry out SI works according to the supplementary CAP endorsed by EPD;</li> </ul>							
		<ul> <li>Submit CAR(s), detailing findings of the SI works and nature/extent of any soil/groundwater contamination, and, if contaminated identified, RAP(s), discussing the appropriate remedial methods and mitigation</li> </ul>							

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	tion Sta	age <sup>1</sup>	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	С	0	Dec	
		measures, for the identified contamination, for EPD agreement; and							
		Carry out soil/groundwater remediation works according to EPD agreed RAP and submit RR(s) afterwards for EPD agreement. The remediation works and agreement of RR should be completed prior to re- development.							
6.7.2	-	<ul> <li>If contamination were identified, mitigation measures as recommended in the RAP should be followed and should include the following:</li> <li>Excavation profiles must be properly designed and executed with attention to the relevant requirements for environment, health and safety;</li> <li>Excavation shall be carried out during dry season as far as possible to minimise contaminated runoff from contaminated soils;</li> </ul>	Project Site / Construction Phase	Contractor		~		√ (for exist ing STS TW)	Guidance Note for Contaminated Land Assessment and Remediation, Practice Guide for Investigation and Remediation of Contaminated Land, Guidance Manual for Use of Risk-based Remediation Goals for Contaminated Land Management
		<ul> <li>Supply of suitable clean backfill material (or treated soil) after excavation;</li> <li>Stockpiling site(s) shall be lined with impermeable sheeting and bunded. Stockpiles shall be fully covered by impermeable sheeting to reduce dust emission. If this is</li> </ul>							

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	tion St	age 1	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	C	0	Dec	
		usage, regular watering shall be applied. However, watering shall be avoided on stockpiles of contaminated soil to minimise contaminated runoff.							
		<ul> <li>Vehicles containing any excavated materials shall be suitably covered to limit potential dust emissions or contaminated wastewater run-off, and truck bodies and tailgates shall be sealed to prevent any discharge during transport or during wet conditions;</li> </ul>							
		• Speed control for the trucks carrying contaminated materials shall be enforced;							
		• Vehicle wheel and body washing facilities at the site's exist points shall be established and used; and							
		• Pollution control measures for air emissions (e.g. from biopile blower and handling of cement), noise emissions (e.g. from blower or earthmoving equipment), and water discharges (e.g. runoff control from treatment facility) shall be implemented and complied with relevant regulations and guidelines.							

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	ation S	tage <sup>1</sup>	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	С	0	Dec	
	Hazard	to Life							
	Constru	ction Phase							
7.14.1	6.2.2	<ul> <li>The following recommendations are justified to be implemented to meet the EIAO-TM requirements:</li> <li>The truck should be designed to minimise the amount of combustible in the cabin. The fuel carried in the fuel tank should also be minimised to reduce the duration of any fire;</li> <li>The accident involvement frequency of the explosives delivery truck should be minimised through implementation of several administrative measures, such as providing training programme to the driver, regular "tool box" briefing session, implementing a defensive driving attitude, selecting driver with good safety record, and providing regular medical checks for the driver;</li> <li>Avoidance of returning unused explosives to the magazine, only the required quantity of explosives for a particular blast should be transported;</li> <li>Maintain a minimum headway of 10 minutes between two</li> </ul>	Explosives dlivery route / Construction Phase	Contractor	1	V			EIAO-TM

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	tion St	age 1	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	C	0	Dec	
		consecutive truck convoys whenever practicable; and							
		• The fire involvement frequency should be minimised by carrying better types of fire extinguishers and with bigger capacity onboard of the explosives delivery truck. Emergency plans and trainings could also be provided to make sure that the fire extinguishers are used adequately.							
7.14.2	6.2.3	The magazine should be designed, built, operated and maintained in accordance with Mines Division's guidelines and appropriate industry best practice. In addition, the following recommendations should be implemented:	Magazine Site/ Construction Phase	Contractor	V	V			-
		The security plan should address different alert security level to reduce opportunity for arson or deliberate initiation of explosives;							
		• Emergency plan should be developed to address uncontrolled fire in magazine area, and drill of the emergency plan should be regularly carried out;							
		Suitable work control system should be set-up, such as an operational manual including Permit-to-Work system, to ensure that work activities undertaken							

EIA Ref.	EM&A Log	A Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	tion St	age 1	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	С	0	Dec	
		during operation of the magazine are properly controlled;							
		Good house-keeping within the magazine to ensure no combustible materials are accumulated;							
		Good house-keeping outside the magazine stores to ensure no combustible materials are accumulated; and							
		• Regular checking of the magazine store to ensure no water seepage through the roof, walls or floor.							
7.14.3	6.2.4	<ul> <li>The following recommendations should be implemented:</li> <li>Emergency plan should be developed to address uncontrolled fire during transport. Case of fire near an explosive delivery truck in jammed traffic should be included in the plan. Activation of fuel and battery isolation switches on vehicle when fire breaks out should also be included in the emergency plan to reduce likelihood of prolonged fire leading to explosion;</li> <li>Working guideline should be developed to define procedure for explosives transport during adverse weather such as</li> </ul>	To and from Magazine Site / Construction Phase	Contractor	1	1			

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	tion St	tage 1	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	C	0	Dec	
		Detonators should be transported separately from other Class 1 explosives. Separation of vehicles should also be maintained through the trip;							
		Develop procedure to ensure the availability of parking space on site for the explosives delivery truck. Delivery should not be commenced if parking space on site is not secured;							
		Hot work or other activities should be banned in the vicinity of the explosives offloading or charging activities;							
		• Lining should be provided within the transportation box on the vehicle;							
		• Fire screen should be used between cabin and the load on the vehicle;							
		• Ensure packaging of detonators remains intact until handed over at blasting site;							
		Ensure that cartridged emulsion packages are not damaged before every trip; and							
		Use experienced driver with good safety record.							

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	ation St	tage 1	Relevant Legislation & Guidelines		
	Ref.		Measures / Timing of Completion of Measures		Des	С	0	Dec			
7.14.4	6.2.5	The following recommendations should be implemented for the safe use of explosives:	CSTW / Construction Phase	Contractor	V	$\checkmark$			-		
		<ul> <li>Blast Charge Weight should be within MIC as specified for the given blast face;</li> </ul>									
		• Temporary mitigation measures such as blast doors or heavy duty blast curtains should be installed at the portals or shafts and at suitable locations underground to prevent flyrock and control the air overpressure;									
		• Multiple faces blasting will be carried out for the construction of cavern in this project. Good communication and control will need to be adopted in ensuring that the works are carried out safely;									
		<ul> <li>It is not intended to carry out complete evacuation of the construction areas and secure refuge areas should be identified to workers in the areas;</li> </ul>									
		• A Chief Shotfirer and a Blasting Engineer shall be employed in addition to the normal blasting personnel to ensure that the works are safe and coordinated between blasting areas;									
		Shotfirer to be provided with a lightning detector, and appropriate									

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	tion St	age 1	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	С	0	Dec	
		control measures should be in place;							
		• Speed limit for the diesel vehicle truck and bulk emulsion truck in the access tunnel and cavern should be imposed. The truck may be escorted while underground to ensure route is clear from hazards and obstructions; and							
		• Hot work should be suspended during passage of the diesel vehicle truck and bulk emulsion truck in the access tunnel and cavern.							
		• A boulder survey should be undertaken based on the likely PPV values that would result from the blasting process. Those boulders subject to the vibration higher than the allowable limit should be strengthened, removed, or constructed with boulder fence, prior to the commencement of blasting.							
	Operatio	on Phase							
		Nil							

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	ation S	tage <sup>1</sup>	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	С	0	Dec	
	Ecologi	cal Impact (Terrestrial and Marine)							
	Constru	ction Phase							
8.8.2	7.2.1	Construction of access roads and other temporary works should be carefully designed (e.g. elevated road for crossing streams) to avoid / minimise habitat loss and fragmentation.	Project site – areas access road / Pre-Construction Phase	Design team / Project Proponent	$\checkmark$				-
8.8.3	7.2.2	<ul> <li>Minimise habitat loss to nearby habitats and associated wildlife by implementing the following mitigation measures: -</li> <li>confining the works within the site boundary;</li> <li>controlling access of site staff to avoid damage to the vegetation in surrounding areas; and</li> <li>placement of equipment or stockpile in the existing disturbed / urbanised land within the site boundary of the Project to minimise disturbance to vegetated areas;</li> </ul>	Project site / Construction Phase	Contractor		V			-
8.8.3	7.2.2	Reinstatement planting should be implemented upon the completion of construction works to minimise the ecological impact arising from the temporary habitat loss	Project Site (Main Portal Area / Secondary Portal Area / Access Road / Temporary Works Area) /Construction Phase	Project Proponent	~	√		√	

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	tion Sta	age <sup>1</sup>	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	С	0	Dec	
8.8.2, 8.8.3 & 8.10	7.2.2	Detailed Vegetation Survey shall be conducted by a suitably qualified botanist / ecologist within the works area requiring vegetation clearance prior to commencement of works to identify plant species of conservation importance.	Proposed works areas (Main Portal, Secondary Portal, Access Road) / Pre-Construction Phase	Project Proponent / Qualified botanist or ecologist		N			
		The potentially affected individuals shall be tagged and fenced off for preservation, and in the case of unavoidable loss, for transplantation to nearby suitable habitat(s).							
8.8.2, 8.8.3 & 8.10	7.3.1	A Protection and Transplantation Proposal including the subsequent monitoring visit for the affected plant species should be prepared and conducted by a suitably qualified local ecologist. The Proposal should be submitted for approval at least one month before works commencement.	Recipient Site for transplanted species / Construction Phase	Project Proponent / Qualified botanist or ecologist		$\checkmark$			
		To review the performance of the transplantation exercise, monitoring of transplanted flora should be conducted monthly after the transplantation throughout the construction phase. The parameters to be monitored should include the health condition and survival rate of the transplanted flora and presence of weedy species. Any observations and recommendations should be reported in monthly EM&A reports							

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	tion St	age <sup>1</sup>	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	С	0	Dec	
8.8.3	7.2.2	Mitigation measures should be implemented to control runoff from the construction site, as well as the adopting guidelines and good site practices for handling and disposal of construction discharges in order to minimise the potential indirect impact on the streams (particularly S2) resulting from site runoff.	Access Road on Nui Po Shan / Construction Phase	Contractor		$\checkmark$			ETWB TCW No. 5/2005
		Precautionary measures should also be implemented to minimise indirect impacts to the streams, such as isolating the work site by placing sandbags and silt curtains, covering up construction materials, debris and spoil to avoid being washed into the stream, and properly collecting and treating construction effluent and sewage.							
8.8.3	7.2.2	Implement good site practice to further minimise impacts from disturbance such as noise, air quality and water quality issues, such as: -	Project site / Construction Phase	Contractor		V			-
		• the use of quiet plant and EPD's QPME and the availability of British Standards 5228 has been considered;							
		• the use of movable noise barrier;							
		• the use of temporary noise screening structures or purpose- built temporary noise barriers;							

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	tion St	age <sup>1</sup>	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	С	0	Dec	
		• install site hoarding as temporary noise barrier where construction works are undertaken;							
		• only well-maintained plant should be operated on site and plant should be serviced regularly during the construction programme;							
		Mitigation measures stipulated in the ProPECC PN 1/94 "Construction Site Drainage" should be complied to minimise water quality impact;							
		• Installation of stand-by pump, emergency power supply and telemetry system to avoid sewage overflow and surcharge to sewerage system due to power/equipment failure.							
8.8.3	7.2.2	Minimise groundwater infiltration during cavern construction with the following water control strategies:-	Project site / Construction Phase	Contractor		$\checkmark$			-
		Probing Ahead: As a normal practice, the Contractor will undertake rigorous probing of the ground ahead of excavation works to identify zones of significant water inflow. The probe drilling results will be evaluated to determine specific grouting requirements in line with the tunnel / cavern advance. In such zones of significant water inflow that could occur as a result of discrete, permeable features, the intent							

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	tion St	age <sup>1</sup>	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	С	0	Dec	
		would be to reduce overall inflow by means of cut-off grouting executed ahead of the tunnel / cavern advance;							
		• Pre-grouting: Where water inflow quantities are excessive, pre- grouting will be required to reduce the water inflow into the tunnel / cavern. The pre-grouting will be achieved via a systematic and carefully specified protocol of grouting;							
		• In principle, the grout pre-treatment would be designed on the basis of probe hole drilling ahead of the tunnel / cavern face;							
		• The installation of waterproof lining would also be adopted after the formation of the tunnels and caverns.							
8.8.3	7.2.2	In the event of excessive infiltration being observed as a result of the tunnelling or excavation works even after incorporation of the water control strategies, post-grouting should be applied as far as practicable as described below:	Project site / Construction Phase	Contractor		V			-
		Post-grouting: Groundwater drawdown will be most likely due to inflows of water into the tunnel / cavern that have not been sufficiently controlled by the pre- grouting measures in high permeability area. Where this							

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	tion St	age 1	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	C	0	Dec	
		occurs post grouting will be undertaken before the lining is installed. Whilst unlikely to be required in significant measure, such a contingency should be allowed for reduction in permeability of the tunnel / cavern surround (by grouting) to limit inflow to acceptable levels.							
		The practical groundwater control measures stated above are proven technologies and have been extensively applied in other past projects. These measures or other similar methods, as approved by the Engineer to suit the works condition shall be applied to minimise the groundwater infiltration.							
8.8.3	7.2.2	In case seepage of groundwater occurs, groundwater should be pumped out from works areas and discharged to the storm system via silt trap. Uncontaminated groundwater from dewatering process should also be discharged to the storm system via silt removal facilities.	Project site / Construction Phase	Contractor		$\checkmark$			-

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	tion St	age 1	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	С	0	Dec	
8.8.3	7.2.2	Mitigation measures recommended in the water quality impact assessment for controlling water quality impact will also serve to protect marine ecological resources from indirect impacts and ensure no unacceptable impact on marine ecological resources.	Tolo Harbour / Construction Phase	Contractor and Operator		1			-
		Relevant government departments including EPD, WSD and AFCD as well as key stakeholders for mariculture and fisheries in Tolo Harbour should be informed of the THEES maintenance / emergency discharge event prior to any discharge.							
		It is recommended that the temporary effluent bypass event and the THEES maintenance period should be shortened as far as possible.							
	Construe	ction and Operation Phase							I
8.8.3	7.2.2	Overall reduction of glare during both construction and operation phase should be considered. A balance between lighting for safety, and avoiding excessive lighting can be achieved through the use of directional lighting to avoid light spill into sensitive areas, and control/timing of lighting periods of some facilities, particularly at the secondary portal which lies approximately 200 m northwest of Ma On Shan Country Park.	Project site / Construction and Operation Phase	Contractor and Operator		V	V		-

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	tion St	tage 1	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	С	0	Dec	
8.8.3	7.2.2	During the decommissioning and demolition of the existing STSTW, the direction and lighting periods should be controlled during ardeid breeding season (March to August) to minimise the potential indirect impact on Penfold Park Egretry and the ardeids flying over the existing STSTW.	Existing STSTW / Decommissioning / March to August	Contractor				V	-
8.10	7.3	It is anticipated that the construction of rock caverns would not have adverse impacts on groundwater in Nui Po Shan. Nonetheless, surface water level or groundwater level near the caverns will be closely monitored during the construction and operation stage.	Project site / Construction and Operation Phase	Contractor and Operator		~	V		-
	Compen	satory Planting	L						I
8.8.4& 8.10.1	7.2.3	Compensatory planting would be provided at main and secondary portal areas, and along the access road.	Main portal, secondary portal, and along access road	Project Proponent	V	$\checkmark$			DEVB TC(W) No. 7/2015
8.8.4 & 8.10.1	7.2.3	To facilitate successful planting, a detailed Woodland Compensation Plan should be prepared by local ecologists with at least 10 years relevant experience to form the basis of the proposed compensatory planting. The Woodland Compensation Plan should include implementation details, management requirement, as well as monitoring requirements (e.g. frequency and parameters) of the	Compensatory planting area (Main portal, secondary portal, and along access road) / pre- construction	Project Proponent	V	V			

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	tion St	age 1	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	C	0	Dec	
		compensatory planting area. Approval of the Plan should be obtained from EPD at least three months before the prior to commencement of compensatory woodland planting.							
8.8.4 & 8.10.1	7.2.3	Upon the completion of planting, monitoring of the woodland compensation areas should be implemented, with maintenance works (e.g. irrigation, weeding, pruning, control of pests and diseases, replacement planting, repair of damage, etc.) conducted as necessary.	Compensatory planting area (Main portal, secondary portal, and along access road) / Operation	Project Proponent / CSTW Operator			$\checkmark$		
	Fisherie	es Impact							
9.6	8.2	Potential impacts on fisheries resources and fishing operations arising from the Project have been avoided and minimised by construction of a connection pipes to the existing emergency outfall of STSTW by trenchless method underneath Shing Mun River with the least water quality impact. In addition, the temporary effluent bypass event for THEES connection work would be synchronized within regular THEES maintenance. Therefore, additional water quality impact and fisheries impact from changes of water quality have been avoided. Furthermore, the THEES maintenance discharge would avoid the blooming season of algae (i.e. January to May) to minimise the potential water quality impacts. It is	Tolo Harbour /Construction and Operation Phase	Project Proponent / Contractor	√				-

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	ation St	tage 1	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	С	0	Dec	
		recommended that any THEES maintenance period should be shortened as far as possible.							
9.6	8.2	Mitigation measures recommended in the water quality impact assessment for controlling water quality impact will also serve to protect fisheries from indirect impacts and ensure no unacceptable impact on fisheries resources and operations. For more detailed mitigation measures regarding water quality refer to Sections 5.7.2 and 5.13.2 of the EIA Report.	Construction and Operation Phase	Contractor and Operator		V	V		-
9.6	8.2	Relevant government departments including EPD, WSD and AFCD as well as key stakeholders for mariculture and fisheries in Tolo Harbour should be informed prior to the THEES maintenance / emergency discharge events.	Tolo Harbour / Construction and Operation Phase	Project Proponent		$\checkmark$	V		
	Landsc	ape and Visual Impact							
Table 10.10	-	CM1 - Preservation of Existing Vegetation	Construction Sites/ Construction Phase	Project Proponent	1	V		√	DEVB TCW No. 7/2015 and latest Guidelines on Tree Preservation during Development issued by GLTM Section of DEVB
Table 10.10	-	CM2 - Transplanting of Affected Trees	Construction Sites/ Construction Phase	Project Proponent	$\checkmark$	V		√	DEVB TCW No. 7/2015 and the latest Guidelines on Tree Transplanting issued by GLTM Section of DEVB

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	ation St	tage <sup>1</sup>	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	С	0	Dec	
Table 10.10	-	CM3 - Compensatory Tree Planting	Construction Sites/ Construction Phase	Project Proponent	$\checkmark$	$\checkmark$		$\checkmark$	DEVB TCW No. 7/2015
Table 10.10	-	CM4 - Control of Night-time Lighting Glare	Construction Sites/ Construction Phase	Project Proponent	V	V		$\checkmark$	
Table 10.10	-	CM5 - Erection of Decorative Screen Hoarding	Construction Sites/ Construction Phase	Project Proponent	V	V		$\checkmark$	
Table 10.10	-	CM6 - Management of Construction Activities and Facilities	Construction Sites/ Construction Phase	Project Proponent	V	V		$\checkmark$	
Table 10.10	-	CM7 - Reinstatement of Temporarily Disturbed Landscape Areas	Construction Sites/ Construction Phase	Project Proponent	V	V		$\checkmark$	
Table 10.11	-	OM1 - Tree and Shrub Planting at the Temporary Project Magazine Site after Completion of Engineering Works	Temporary Project Magazine Site / Operation Phase	Project Proponent	$\checkmark$	$\checkmark$	V		
Table 10.11	-	OM2 - Aesthetically pleasing design of Aboveground Structures	Tunnel Portals, Administration Building, Ventilation Buildings, Electrical Substations and Ventilation Shaft / Operation Phase	Project Proponent	V	V	V		

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	tion St	age 1	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	С	0	Dec	
Table 10.11	-	OM3 - Aesthetically pleasing design of Highways Structures	Access Road to Ventilation Shaft / Operation Phase	Highways Department	$\checkmark$	V	$\checkmark$		
Table 10.11	-	OM4 - Reprovision of Cycle Track	Cycle track / Operation Phase	Highways Department	$\checkmark$	V	V		
Table 10.11	-	OM5 - Provision of Green Roof	Administration Building and Ventilation Buildings / Operation Phase	Project Proponent	1	V	V		
Table 10.11	-	OM6 - Provision of Buffer Planting	Main and Secondary Portal Areas / Operation Phase	Project Proponent	V	V	$\checkmark$		
Table 10.11	-	OM7 - Hydroseeding on the disturbed ground surface after demolition works prior to future redevelopment of the existing STSTW	Existing STSTW / Operation Phase	Lands Department (LandsD) or future development agent in existing STSTW	V	$\checkmark$	√		
Table 10.11	-	OM8 - Woodland Mix Planting on Soil Slopes	Soil Slopes / Operation Phase	Project Proponent	$\checkmark$	$\checkmark$	$\checkmark$		

EIA Ref.	EM&A Log	Environmental Protection Measures	Duration of	Implementation Agent	Imple	ementa	tion St	Relevant Legislation & Guidelines	
	Ref.		Measures / Timing of Completion of Measures		Des	C	0	Dec	
	Cultural	Heritage Impact							
11.5.1.1	10.1.1	No potential direct or indirect impact to cultural heritage resource is anticipated, and therefore no mitigation measures are required.	N/A	N/A					EIAO EIAO-TM Antiquities and Monuments Ordinance Guidelines for Cultural Heritage Impact Assessment
	Wastes	Management Implications							
12.6.2	11.2.2	Appropriate waste handling, transportation and disposal methods for all waste arising generated during the construction works for the Project should be implemented to ensure that construction wastes do not enter the nearby streams or drainage channel. It is anticipated that adverse impacts would not arise on the construction site, provided that good site practices are strictly followed. Recommendations for	Project Site Area / Construction Phase	Contractor		V		~	Waste Disposal Ordinance
		<ul> <li>good site practices during the construction activities include:</li> <li>Nomination of approved personnel, such as a site manager, to be responsible for good site practices, and making arrangements for collection of all wastes generated at the site and effective disposal to an appropriate facility.</li> </ul>							

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	tion St	Relevant Legislation & Guidelines	
	Ref.		Measures / Timing of Completion of Measures		Des	С	0	Dec	
		Training of site personnel in proper waste management and chemical waste handling procedures.							
		• Provision of sufficient waste reception/ disposal points, of a suitable vermin-proof design that minimises windblown litter.							
		Arrangement for regular collection of waste for transport off-site and final disposal.							
		• Appropriate measures to minimise windblown litter and dust during transportation of waste by either covering trucks or by transporting wastes in enclosed containers.							
		Regular cleaning and maintenance programme for drainage systems, sumps and oil interceptors.							
		• A recording system for the amount of wastes generated, recycled and disposed (including the disposal sites) should be proposed.							
		A Waste Management Plan should be prepared and should be submitted to the Engineer for approval. One may make reference to ETWB TCW No. 19/2005 for details.							
		In order to monitor the disposal of C&D material at landfills and public filling areas, as appropriate, and to control fly tipping, a trip-ticket system should be included as one of the contractual							

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	tion S	tage <sup>1</sup>	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	C	0	Dec	
		requirements to be implemented by an Environmental Team undertaking the Environmental Monitoring and Audit work. One may make reference to DEVB TCW No.6/2010 for details.							
12.6.3	11.2.3	Good management and control of construction site activities / processes can minimise the generation of waste. Waste reduction is best achieved at the planning and design stage, as well as by ensuring the implementation of good site practices. Recommendations to achieve waste reduction include:	Project Site Area / Construction Phase	Contractor		V		V	Waste Disposal Ordinance
		<ul> <li>Segregate and store different types of construction related waste in different containers, skips or stockpiles to enhance reuse or recycling of materials and their proper disposal.</li> </ul>							
		• Provide separate labelled bins to segregate recyclable waste such as aluminium cans from other general refuse generated by the work force, and to encourage collection by individual collectors.							
		Any unused chemicals or those with remaining functional capacity shall be recycled.							
		Maximising the use of reusable steel formwork to reduce the amount of C&D material.							
		Prior to disposal of C&D waste, it is recommended that wood, steel							

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	tion St	age <sup>1</sup>	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	С	0	Dec	
		and other metals shall be separated for re-use and / or recycling to minimise the quantity of waste to be disposed of to landfill.							
		On-site crushing and sorting facilities are being considered to reduce the rock size to fulfill the size requirements from relevant waste collection / transfer / disposal facilities;							
		• Adopt proper storage and site practices to minimise the potential for damage to, or contamination of, construction materials.							
		• Plan the delivery and stock of construction materials carefully to minimise the amount of surplus waste generated.							
		Adopt pre-cast construction method instead of cast-in-situ method for construction of concrete structures as much as possible; and							
		Minimise over ordering of concrete, mortars and cement grout by doing careful check before ordering.							
		In addition to the above measures, other specific mitigation measures are recommended below to minimise environmental impacts during handling, transportation and disposal of wastes.							

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	tion St	age <sup>1</sup>	Relevant Legislation & Guidelines         -         -         Waste Disposal Ordinance         Waste Disposal (Charges for Dispos
	Ref.		Measures / Timing of Completion of Measures		Des	С	0	Dec	
12.6.4	11.2.4	<ul> <li>Storage of materials on site may induce adverse environmental impacts if not properly managed, recommendations to minimise the impacts include:</li> <li>Waste, such as soil, should be handled and stored well to ensure secure containment, thus minimising the potential of</li> </ul>	Project Site Area / Construction Phase	Contractor		$\checkmark$		1	-
		<ul> <li>pollution;</li> <li>Maintain and clean storage areas routinely;</li> </ul>							
		<ul> <li>Stockpiling area should be provided with covers as much as practicable and water spraying system to prevent materials from wind-blown or being washed away; and</li> </ul>							
		Different locations should be designated to stockpile each material to enhance reuse.							
12.6.4	11.2.4	Licensed waste haulers should be employed for the collection and transportation of waste generated. The following measures should be enforced to minimise the potential adverse	Project Site Area / Construction Phase	Contractor		$\checkmark$		V	Ordinance
		impacts:							(Charges for Disposal of Construction Waste)
		Remove waste in timely manner;							Regulation
		Waste collectors should only collect wastes prescribed by their permits;							Land (Miscellaneous
		• Impacts during transportation, such as dust and odour, should be							Provisions) Ordinance

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	tion Sta	age <sup>1</sup>	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	С	0	Dec	
		mitigated by the use of covered trucks or in enclosed containers;							
		Obtain relevant waste disposal permits from the appropriate authorities, in accordance with the Waste Disposal Ordinance (Cap. 354), Waste Disposal (Charges for Disposal of Construction Waste) Regulation (Cap. 345) and the Land (Miscellaneous Provisions) Ordinance (Cap. 28);							
		Waste should be disposed of at licensed waste disposal facilities; and							
		<ul> <li>Maintain records of quantities of waste generated, recycled and disposed.</li> </ul>							
12.6.4	11.2.4	Land transport will be used for transportation of excavated and stockpile materials. It is expected there will be 1260 vehicles per day for transporting waste during peak construction phase. The tentative transportation routings for the disposal of various types of wastes are shown in Table 12.4. The transportation routing may be changed subject to the traffic conditions. Nevertheless, it is anticipated that there is no adverse impact from the waste during transportation with the implementation of appropriated measures (e.g. using water-tight containers and covered trucks).	Transportation Route of Waste / Construction Phase	Contractor		~			-

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent		age 1	Relevant Legislation & Guidelines		
	Ref.		Measures / Timing of Completion of Measures		Des	С	0	Dec	
12.6.4	11.2.4	In order to monitor the disposal of C&D materials at PFRFs and landfills and to control fly-tipping, a trip-ticket system should be established in accordance with DEVB TCW No. 6/2010. A recording system for the amount of waste generated, recycled and disposed, including the disposal sites, should also be set up. Warning signs should be put up to remind the designated disposal sites. Close- circuited television should be installed at the vehicular entrance and exit of the site as additional measures to prevent fly-tipping.	Project Site Area / Construction Phase	Contractor		~		~	DEVB TCW No. 6/2010
12.6.4	11.2.5	In addition to the above general measures, other specific mitigation measures on handling the C&D materials and materials generated from site formation and demolition work are recommended below, which should form the basis of the WMP to be prepared by the contractor(s) in construction phase.	Project Site Area / Construction Phase	Contractor		$\checkmark$		~	Technical Circular (Works) No. 19/2005 Environmental Management on Construction Site
12.6.5	11.2.5	In order to minimise the impact resulting from collection and transportation of C&D materials for off- site disposal, the excavated material arising from site formation and foundation works should be reused on- site as backfilling material and for landscaping works as far as practicable. Other mitigation requirements are listed below:	Project Site Area / Construction Phase	Contractor		V		~	Waste Disposal Ordinance ETWB TCW No.19/2005 DEVB TCW No. 6/2010

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	tion St	age 1	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	С	0	Dec	
		A WMP, which becomes part of the EMP, should be prepared in accordance with ETWB TCW No.19/2005;							
		• A recording system for the amount of wastes generated, recycled and disposed (including the disposal sites) should be adopted for easy tracking; and							
		<ul> <li>In order to monitor the disposal of C&amp;D materials at public filling facilities and landfills and to control fly-tipping, a trip-ticket system should be adopted (refer to DEVB TCW No. 6/2010).</li> </ul>							
		It is recommended that specific areas should be provided by the Contractors for sorting and to provide temporary storage areas (if required) for the sorted materials.							
12.6.5	11.2.5	The Contactor should prepare and implement an EMP in accordance with ETWB TCW No.19/2005, which describes the arrangements for avoidance, reuse, recovery, recycling, storage, collection, treatment and disposal of different categories of waste to be generated from construction activities. Such a management plan should incorporate site specific factors, such as the designation of areas for segregation and temporary storage of reusable and recyclable materials. The EMP should	Project Site Area / Construction Phase	Contractor		~			ETWB TCW No.19/2005

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	tion St	age 1	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	С	0	Dec	
		be submitted to the Engineer for approval. The Contractor should implement waste management practices in the EMP throughout the construction stage of the Project. The EMP should be reviewed regularly and updated by the Contractor, preferably on a monthly basis.							
12.6.5	11.2.5	All surplus C&D materials arising from or in connection with construction works should become the property of the Contractor when it is removed unless otherwise stated. The Contractor would be responsible for devising a system to work for on-site sorting of C&D materials and promptly removing all sorted and process materials arising from the construction activities to minimise temporary stockpiling on-site. The system should be included in the EMP identifying the source of generation, estimated quantity, arrangement for on-site sorting, collection, temporary storage areas and frequency of collection by recycling Contractors or frequency of removal off-site.	Project Site Area / Construction Phase	Contractor		~		1	-
12.6.6	11.2.6	The practices of good housekeeping for CSTW listed below should be followed to ameliorate any odour impact from handling, collection, transportation and disposal of sludge:	Operation Phases	Operator			V		Waste Disposal Ordinance

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	tion St	age 1	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	С	0	Dec	
		Screens should be cleaned regularly to remove any accumulated organic debris							
		Grit and screening transfer systems should be flushed regularly with water to remove organic debris and grit							
		Grit and screened materials should be transferred to closed containers							
		Scum and grease collection wells and troughs should be emptied and flushed regularly to prevent putrefaction of accumulated organics							
		Skim and remove floating solids and grease from primary clarifiers regularly							
		• Frequent sludge withdrawal from tanks is necessary to prevent the production of gases							
		<ul> <li>Sludge should be transported to the STF by water-tight containers to avoid Hydrogen Sulphide (H<sub>2</sub>S)/odour emission and ingress of water into the containers which would lower the sludge dryness during transportation</li> </ul>							
		Sludge cake should be transferred to closed containers							
		Sludge containers should be flushed with water regularly							

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	tion St	age 1	Relevant Legislation & Guidelines
	Ref.		Measures / Timing of Completion of Measures		Des	C	0	Dec	
		Sludge trucks and containers should be washed thoroughly before leaving the CSTW to avoid any odour nuisance during transportation							
12.6.6	11.2.6	In addition, all wastewater generated from the sludge dewatering process and all contaminated water from the cleaning operations recommended for odour control will be diverted to the relocated STSTW for proper treatment.	Operation Phases	Operator			V		Waste Disposal Ordinance
12.6.7	11.2.7	If chemical wastes are produced at the construction site or during operation, the Contractor during construction or the operator during operation will be required to register with the EPD as a chemical waste producer and to follow the guidelines stated in the Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes. Good quality containers compatible with the chemical wastes should be used, and incompatible chemicals should be stored separately. Appropriate labels should be securely attached on each chemical waste container indicating the corresponding chemical waste, such as explosive, flammable, oxidising, irritant, toxic, harmful, corrosive, etc. The Contractor shall use a licensed collector to transport and dispose of the chemical wastes, to the licensed Chemical Waste Treatment Centre, or other	Construction and Operation Phases	Contractor / Operator		~	~		Waste Disposal (Chemical Waste) (General) Regulation Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes

EIA Ref.	EM&A Log	Environmental Protection Measures	Location / Duration of	Implementation Agent	Imple	ementa	ation St	age 1	Public Health and Municipal Services
	Ref.		Measures / Timing of Completion of Measures		Des	С	0	Dec	
		licensed facilities, in accordance with the Waste Disposal (Chemical Waste) (General) Regulation.							
12.6.8	11.2.8	Recycling of waste paper, aluminium cans and plastic bottles should be encouraged, it is recommended to place clearly labelled recycling bins at designated locations which could be accessed conveniently. Other general refuse should be separated from chemical and industrial waste by providing separated bins for storage to maximise the recyclable volume.	Construction and Operation Phases	Contractor / Operator		V	$\checkmark$		
12.6.8	11.2.8	A reputable licensed waste collector should be employed to remove general refuse on a daily basis to minimise odour, pest and litter impacts.	Construction and Operation Phases	Contractor / Operator		V	$\checkmark$		Public Health and Municipal Services Ordinance (Cap. 132)
	Health I	mpact							
-	-	Not applicable.							



Appendix 4.1

Action and Limit Level



# Action and Limit Level

# Action and Limit Level for Noise Monitoring

		Limit Level (dB(A))							
Monitoring Station	Action Level	0700-1900 hrs on normal weekdays	0700-2300 hrs on holidays (including Sundays); and 1900-2300 hrs on all days <sup>2</sup>	2300-0700 hrs of all days <sup>2</sup>					
CM1		65 / 70 <sup>1</sup>							
CM2(A)	When one	65 / 70 <sup>1</sup>							
CM3	documented complaint is	65 / 70 <sup>1</sup>	60 / 65 / 70 <sup>3</sup>	45 / 50 / 55 <sup>3</sup>					
CM4	received	75							
CM5		75							

Remark 1: Limit level of CM1, CM2(A) and CM3 reduce to 65 dB (A) during examination periods if any.

- Remark 2: Construction noise during restricted hours is under the control of Noise Control Ordinance Limit Level to be selected based on Area Sensitivity Rating.
- Remark 3: Limit Level for restricted hour monitoring shall act as reference level only. Investigation would be conducted on CNP compliance if exceedance recorded during restricted hour noise monitoring period.

# Action and Limit Level for Air Quality Monitoring

Monitoring Locations	1-hour TSP Level in μg/m3							
	Action Level	Limit Level						
AM1	294	500						
AM2	325	500						
AM3(A)	360	500						
AM4	297	500						
AM5	349	500						



Appendix 4.2

**Copies of Calibration Certificates** 



# Manufacturer Calibration Certificate

The following instrument has been tested and calibrated to the manufacturer specifications. The calibration is traceable in accordance with ISO/IEC 17025 covering all instrument functions.

- Device Type: XL2 Audio and Acoustic Analyzer
- Serial Number: A2A-15360-E0

- Certificate Issued: 19 February 2019
- Certificate Number: 43515-A2A-15360-E0
- Results:

**PASSED** (for detailed report see next page)

Tested by:

M. Frick

Signature:

Stamp:



Calibration of:	XL2 Audio and Acoustic Analyzer
Serial Number:	A2A-15360-E0
Date:	19 February 2019

• Detailed Calibration Test Results:

					actual	XL2	calibration
	I	reference	actual	unit	error	tolerance	uncertainty <sup>2</sup>
RMS Level @ 1kHz, XLR	Input	0.1	0.100	V	≤0.1%	±0.5%	±0.10%
		1	1.000	V	≤0.1%	±0.5%	±0.09%
		10	9.991	V	-0.1%	±0.5%	±0.09%
Flatness, XLR Input <sup>1</sup>	20 Hz	1	0.996	V	-0.4%	±1.1%	±0.09%
	20 kHz	1	1.005	V	0.5%	±1.1%	±0.09%
Frequency		1000	999.99	Hz	≤0.003%	±0.003%	±0.01%
Residual Noise	XLR		< 2 uV			<2 uV	±0.50%
THD+N @ 0 dBu, 1 kHz,	XLR Input		-99.7	dB		typ100 dB	±0.50%

- Test Conditions: Temperature: 29.7 °C Relative Humidity: 21.7 %
- Calibration Equipment Used:
- Agilent Multimeter, Typ 34401A, Serial No. MY 5300 4607 Last calibration: 15.08.2018, Next calibration: 15.08.2019 Calibrated by ELCAL to the national standards maintained at Swiss Federal Office of Metrology. SCS 0002
- FX100 Audio Analyzer, Serial No. 10408
   Last Calibration: 27.04.2018, Next Calibration: 27.04.2019
   Manufacturer calibration based on Agilent 34410, Serial No. MY47014254, Last Calibration: 11.05.2018, Next Calibration: 11.05.2019
   which is calibrated by ELCAL to national standards maintained at Swiss Federal Office of Metrology. SCS 002
- <sup>1</sup> The specified tolerance +/-0.1 dB @ 1V = +/-1.1%
- <sup>2</sup> The reported expanded uncertainty is based on a standard uncertainty multiplied by a coverage factor k=2, providing a level of confidence of approximately 95%. The uncertainty evaluation has been carried out in accordance with the regulations of the GUM.



# Manufacturer Calibration Certificate

The following instrument has been tested and calibrated to the manufacturer specifications. The calibration is traceable in accordance with ISO/IEC 17025 covering all instrument functions.

# M2230 Measurement Microphone

consisting of		
MA220	Serial Number:	8034
Capsule	Serial Number:	A16673

- Certificate Issued: 19 February 2019
- Certificate Number: 43515-8034-M2230
- Results: PASSED
   (for detailed report see next page)

Tested by:

M.Frick

Signature:

Stamp:



Date:	19 Febr	uary 2019		
Calibration of:	M2230	Measureme	nt Microphone	
		MA220	Serial Number:	8034
		Capsule	Serial Number:	A16673

• Detailed Calibration Test Results:



- Calibration Equipment Used:
  - Norsonic Sound Calibrator, Type 1251, S/No. 30930 Last Calibration: 05.12.2018, Next Calibration: 05.12.2020 Calibrated by Metas, Switzerland
  - NTi Audio FX100, S/No. 11094
     Last Calibration: 14.08.2018, Next Calibration: 14.08.2019
     Calibrated by NTi Audio meeting product specifications
  - MTG MV203, S/No. 0630 / Mic Capsule, MK221 S./No. 16502 Last Calibration: 08.12.2017, Next Calibration: 08.12.2019 Calibrated by MTG, Germany

<sup>1</sup> The reported expanded uncertainty is based on a standard uncertainty multiplied by a coverage factor k=2, providing a level of confidence of approximately 95%. The uncertainty evaluation has been carried out in accordance with the regulations of the GUM.



### 综合試驗有限公司 SOILS & MATERIALS ENGINEERING CO., LTD. 香港黄竹坑道37號利達中心12樓 12/F., Leader Centre, 37 Wong Chuk Hang Road, Aberdeen, Hong Kong. E-mail: smec@cigismec.com Website: www.cigismec.com

Tel: (852) 2873 6860 Fax: (852) 2555 7533



# CERTIFICATE OF CALIBRATION

Certificate No.:	20CA0214 01-01		Page	1 of 2
Item tested				
Description:	Sound Level Meter	(Type 1)	, Microphone	Preamp
Manufacturer:	Nti		, Nti Andio	Nti Andio
Type/Model No.:	XL2		MC230A	MA220
Serial/Equipment No.:	A2A-15360-EO		A16673	8034
Adaptors used:	-		,	
Item submitted by				
Customer Name:	Lam Environmental	Services Limited.		
Address of Customer:	-			
Request No.:	-			
Date of receipt:	14-Feb-2020			
Date of test:	17-Feb-2020			
Reference equipment	used in the calibra	ation		
	Model:	Serial No.	Expiry Date:	Traceable to:
Description:	<b>Model:</b> B&K 4226	Serial No. 2288444	Expiry Date: 23-Aug-2020	Traceable to: CIGISMEC
Description: Multi function sound calibrator				
Description: Multi function sound calibrator Signal generator Ambient conditions	B&K 4226	2288444	23-Aug-2020	CIGISMEC
Description: Multi function sound calibrator Signal generator	B&K 4226	2288444	23-Aug-2020	CIGISMEC
Description: Multi function sound calibrator Signal generator Ambient conditions	B&K 4226 DS 360	2288444	23-Aug-2020	CIGISMEC

### Test specifications

- 1, The Sound Level Meter has been calibrated in accordance with the requirements as specified in BS 7580: Part 1: 1997 and the lab calibration procedure SMTP004-CA-152.
- 2, The electrical tests were performed using an electrical signal substituted for the microphone which was removed and replaced by an equivalent capacitance within a tolerance of ±20%.
- The acoustic calibration was performed using an B&K 4226 sound calibrator and corrections was applied for the difference between the free-field and pressure responsess of the Sound Level Meter.

# **Test results**

This is to certify that the Sound Level Meter conforms to BS 7580: Part 1: 1997 for the conditions under which the test was performed.

Details of the performed measurements are presented on page 2 of this certificate.

Actual Measurement data are documented on worksheets.

**Approved Signatory:** 

Fend Juna



Company Chop:



**Comments:** The results reported hethis certificate refer to the condition of the instrument on the date of calibration and carry no implication regarding the long-term stability of the instrument.

© Soils & Materials Engineering Co., Ltd.

Form No.CARP152-1/Issue 1/Rev.C/01/02/2007



# 綜合試驗有限公司 SOILS & MATERIALS ENGINEERING CO., LTD.

香 港 黃 竹 坑 道 3 7 號 利 達 中 心 1 2 樓 12/F., Leader Centre, 37 Wong Chuk Hang Road, Aberdeen, Hong Kong. E-mail: smec@cigismec.com Website: www.cigismec.com Tel: (852) 2873 6860 Fax: (852) 2555 7533



2

# **CERTIFICATE OF CALIBRATION**

(Continuation Page)

Certificate No.:

20CA0214 01-01

Page

2 of

### 1, Electrical Tests

The electrical tests were perfomed using an equivalent capacitance substituted for the microphone. The results are given in below with test status and the estimated uncertainties. The "Pass" means the result of the test is inside the tolerances stated in the test specifications. The "-" means the result of test is outside these tolerances.

			Expanded	Coverage
Test:	Subtest:	Status:	Uncertanity (dB)	Factor
Self-generated noise	A	Pass	0.3	
0	С	Pass	0.8	2.1
	Lin	Pass	1.6	2.2
Linearity range for Leq	At reference range , Step 5 dB at 4 kHz	Pass	0.3	
	Reference SPL on all other ranges	Pass	0.3	
	2 dB below upper limit of each range	Pass	0.3	
	2 dB above lower limit of each range	Pass	0.3	
Linearity range for SPL	At reference range, Step 5 dB at 4 kHz	Pass	0.3	
Frequency weightings	A	Pass	0.3	
	С	Pass	0.3	
	Lin	Pass	0.3	
Time weightings	Single Burst Fast	Pass	0.3	
	Single Burst Slow	Pass	0.3	
Peak response	Single 100µs rectangular pulse	Pass	0.3	
R.M.S. accuracy	Crest factor of 3	Pass	0.3	
Time weighting I	Single burst 5 ms at 2000 Hz	Pass	0.3	
	Repeated at frequency of 100 Hz	Pass	0.3	
Time averaging	1 ms burst duty factor 1/10 <sup>3</sup> at 4kHz	Pass	0.3	
	1 ms burst duty factor 1/10 <sup>4</sup> at 4kHz	Pass	0.3	
Pulse range	Single burst 10 ms at 4 kHz	Pass	0.4	
Sound exposure level	Single burst 10 ms at 4 kHz	Pass	0.4	
Overload indication	SPL	Pass	0.3	
	Leq	Pass	0.4	

### 2, Acoustic tests

The complete sound level meter was calibrated on the reference range using a B&K 4226 acoustic calibrator with 1000Hz and SPL 94 dB. The sensitivity of the sound level meter was adjusted. The test result at 125 Hz and 8000 Hz are given in below with test status and the estimated uncertainties.

Test:	Subtest	Status	Expanded Uncertanity (dB)	Coverage Factor
Acoustic response	Weighting A at 125 Hz	Pass	0.3	
	Weighting A at 8000 Hz	Pass	0.5	

### 3, Response to associated sound calibrator

### N/A

The expanded uncertainties have been calculated in accordance with the ISO Publication "Guide to the expression of uncertainty in measurement", and gives an interval estimated to have a level of confidence of 95%. A coverage factor of 2 is assumed unless explicitly stated.



The standard(s) and equipment used in the calibration are traceable to national or international recognised standards and are calibrated on a schedule to maintain the required accuracy level.

© Soils & Materials Engineering Co., Ltd.

Form No.CARP152-2/Issue 1/Rev.C/01/02/2007



合試驗有限公司 SOILS & MATERIALS ENGINEERING CO., LTD. 香港黄竹坑道37號利達中心12樓 12/F., Leader Centre, 37 Wong Chuk Hang Road, Aberdeen, Hong Kong. E-mail: smec@cigismec.com Website: www.cigismec.com

Tel: (852) 2873 6860 Fax: (852) 2555 7533

# **SMECLab**

Test Data for Sound Level Meter						Page 1 of 6
Sound level me	eter type:	XL2	Serial No.	A2A-15360-EO	Date	17-Feb-2020
Microphone	type:	MC230A	Serial No.	A16673	Report	: 20CA0214 01-01

# SELF GENERATED NOISE TEST

The noise test is performed in the most sensitive range of the SLM with the microphone replaced by an equivalent impedance.

Noise level in A weighting	17.8	dB
Noise level in C weighting	18.0	dB
Noise level in Lin	23.3	dB

# LINEARITY TEST

The linearity is tested relative to the reference sound pressure level using a continuous sinusoidal signal of frequency 4 kHz. The measurement is made on the reference range for indications at 5 dB intervals starting from the 94 dB reference sound pressure level. And until within 5 dB of the upper and lower limits of the reference range, the measurements shall be made at 1 dB intervals.(SLM set to LEQ/SPL)

Reference/Expected level	Actua	l level	Tolerance	Devia	Deviation		
neierence/expected lever	non-integrated	integrated		non-integrated	integrated		
dB	dB	dB	+/- dB	dB	dB		
94.0	94.0	94.0	0.7	0.0	0.0		
99.0	99.0	99.0	0.7	0.0	0.0		
104.0	104.0	104.0	0.7	0.0	0.0		
109.0	109.0	109.0	0.7	0.0	0.0		
114.0	114.0	114.0	0.7	0.0	0.0		
115.0	115.0	115.0	0.7	0.0	0.0		
116.0	116.0	116.0	0.7	0.0	0.0		
117.0	117.0	117.0	0.7	0.0	0.0		
118.0	118.0	118.0	0.7	0.0	0.0		
119.0	119.0	119.0	0.7	0.0	0.0		
120.0	120.0	120.0	0.7	0.0	0.0		
89.0	89.0	89.0	0.7	0.0	0.0		
84.0	84.0	84.0	0.7	0.0	0.0		
79.0	79.0	79.0	0.7	0.0	0.0		
74.0	74.0	74.0	0.7	0.0	0.0		
69.0	69.0	69.0	0.7	0.0	0.0		
64.0	64.0	64.0	0.7	0.0	0.0		
59.0	59.0	59.0	0.7	0.0	0.0		
54.0	54.0	54.0	0.7	0.0	0.0		
49.0	49.0	49.0	0.7	0.0	0.0		
44.0	44.0	44.0	0.7	0.0	0.0		
39.0	39.0	39.0	0.7	0.0	0.0		
34.0	34.1	34.1	0.7	0.1	0.1		
33.0	33.1	33.1	0.7	0.1	0.1		



### 综合試驗有限公司 SOILS & MATERIALS ENGINEERING CO., LTD. 香港黄竹坑道37號利達中心12樓 12/F., Leader Centre, 37 Wong Chuk Hang Road, Aberdeen, Hong Kong. E-mail: smec@cigismec.com

Tel: (852) 2873 6860 Fax: (852) 2555 7533

# SMECLab

Page 2 of 6

Test Data for Sound Level Meter

Sound level met Microphone	er type: type:	XL2 MC230A		Serial No. Serial No.	A2A-15360-EO A16673		
						Report: 20CA021	4 01-01
32.0		32.2	32.2	0.7	0.2	0.2	
31.0		31.2	31.2	0.7	0.2	0.2	
30.0		30.3	30.3	0.7	0.3	0.3	

Measurements for an indication of the reference SPL on all other ranges which include it

Other ranges	Expected level	Actual level	Tolerance	Deviation
dB	dB	dB	+/- dB	dB
40-140	94.0	94.0	0.7	0.0
20-120	94.0	94.0	0.7	0.0
0-100	94.0	94.0	0.7	0.0

Measurements on all level ranges for indications 2 dB below the upper limit and 2 dB above the lower limit

Ranges	Reference/Expected level	Actual level	Tolerance	Deviation
dB	dB	dB	+/- dB	dB
40-140	52.0	52.5	0.7	0.5
40-140	138.0	138.0	0.7	0.0
20 120	30.0	30.3	0.7	0.3
20-120	118.0	118.0	0.7	0.0
0.100	30.0	30.0	0.7	0.0
0-100	98.0	98.0	0.7	0.0

# FREQUENCY WEIGHTING TEST

The frequency response of the weighting netwoks are tested at octave intervals over the frequency ranges 31.5 Hz to 12500 Hz. The signal level at 1000 Hz is set to give an indication of the reference SPL. Frequency weighting A:

Frequency	Ref. level	Expected level	Actual level	Tolerar	nce(dB)	Deviation
Hz	dB	dB	dB	+	-	dB
1000.0	94.0	94.0	94.0	0.0	0.0	0.0
31.6	94.0	54.6	54.4	1.5	1.5	-0.2
63.1	94.0	67.8	67.6	1.5	1.5	-0.2
125.9	94.0	77.9	77.8	1.0	1.0	-0.1
251.2	94.0	85.4	85.3	1.0	1.0	-0.1
501.2	94.0	90.8	90.7	1.0	1.0	-0.1
1995.0	94.0	95.2	95.1	1.0	1.0	-0.1
3981.0	94.0	95.0	94.9	1.0	1.0	-0.1
7943.0	94.0	92.9	92.9	1.5	3.0	0.0
12590.0	94.0	89.7	89.5	3.0	6.0	-0.2
Frequency weigh	ting C:					
Frequency	Ref. level	Expected level	Actual level	Tolerar	nce(dB)	Deviation
Hz	dB	dB	dB	+	-	dB

(c)Soils Materials Eng. Co., Ltd.

Form No.: CAWS 152/Issue 1/Rev. B/01/02/2007



## 综合試驗有限公司 SOILS & MATERIALS ENGINEERING CO., LTD. 香港黃竹坑道 37號利達中心 12樓

省 他 與 竹 兆 垣 3 7 號 桁 建 中 心 1 2 读 12/F., Leader Centre, 37 Wong Chuk Hang Road, Aberdeen, Hong Kong. E-mail: smec@cigismec.com Website: www.cigismec.com Tel: (852) 2873 6860 Fax: (852) 2555 7533

# SMECLab

Page 3 of 6

Test Data for Sound Level Meter

Sound level me	2.	XL2	Serial No.		A-15360-EO	Date 1	7-Feb-2020
Vicrophone	type:	MC230A	Serial No.	AIC	673	Report: 2	0CA0214 01-0
1000.0	94.0	94.0	94.0	0.0	0.0	0.0	
31.6	94.0	91.0	90.8	1.5	1.5	-0.2	
63.1	94.0	93.2	93.0	1.5	1.5	-0.2	
125.9	94.0	93.8	93.8	1.0	1.0	0.0	
251.2	94.0	94.0	93.9	1.0	1.0	-0.1	
501.2	94.0	94.0	94.0	1.0	1.0	0.0	
1995.0	94.0	93.8	93.8	1.0	1.0	0.0	
3981.0	94.0	93.2	93.2	1.0	1.0	0.0	
7943.0	94.0	91.0	91.0	1.5	3.0	0.0	
12590.0	94.0	87.8	87.6	3.0	6.0	-0.2	
requency weig	ghting Lin:	1					
and a second				-	(15)	<b>D</b>	

Frequency	Ref. level	Expected level	Actual level	Tolerar	nce(dB)	Deviation
Hz	dB	dB	dB	+	-	dB
1000.0	94.0	94.0	94.0	0.0	0.0	0.0
31.6	94.0	94.0	93.8	1.5	1.5	-0.2
63.1	94.0	94.0	93.8	1.5	1.5	-0.2
125.9	94.0	94.0	93.9	1.0	1.0	-0.1
251.2	94.0	94.0	93.9	1.0	1.0	-0.1
501.2	94.0	94.0	93.9	1.0	1.0	-0.1
1995.0	94.0	94.0	93.9	1.0	1.0	-0.1
3981.0	94.0	94.0	94.0	1.0	1.0	0.0
7943.0	94.0	94.0	94.0	1.5	3.0	0.0
12590.0	94.0	94.0	94.0	3.0	6.0	0.0

Note: No corrections for the frequency response of the microphone, instrument case and windshield are made to the sound level meter.

# TIME WEIGHTING FAST TEST

Time weighting F is tested on the reference range with a single sinusoidal burst of duration 200 ms at a frequency 2000 Hz and an amplitude which produces an indication 4 dB below the upper limit of the primary indicator range when the signal is continuous. (Weight A, Maximum hold)

inter alle eignat te certainactiet	(				
Ref. level	Expected level	Actual level	Tolera	nce(dB)	Deviation
dB	dB	dB	+	-	dB
116.0	115.0	115.0	1.0	1.0	0.0

# TIME WEIGHTING SLOW TEST

Time weighting S is tested on the reference range with a single sinusoidal burst of duration 500 ms at a frequency 2000 Hz and an amplitude which produces an indication 4 dB below the upper limit of the primary indicator range when the signal is continuous. (Weight A, Maximum hold)

Ref. level	Expected level	Actual level	Tolera	nce(dB)	Deviation
dB	dB	dB	+	-	dB
116.0	111.9	112.0	1.0	1.0	0.1



# 綜合試驗有限公司 SOILS & MATERIALS ENGINEERING CO., LTD.

香港黄竹坑道37號利達中心12樓 12/F., Leader Centre, 37 Wong Chuk Hang Road, Aberdeen, Hong Kong. E-mail: smec@cigismec.com Website: www.cigismec.com Tel: (852) 2873 6860 Fax: (852) 2555 7533

# SMECLab

Test Data for So	und Level Me	eter				Page 4 of 6
Sound level me	eter type:	XL2	Serial No.	A2A-15360-EO	Date	17-Feb-2020
Microphone	type:	MC230A	Serial No.	A16673	Report	: 20CA0214 01-01

# PEAK RESPONSE TEST

The onset time of the peak detector is tested on the reference range by comparing the response to a 100 us rectangular test pulse with the response to a 10 ms reference pulse of the same amplitude. The amplitude of the 10 ms reference pulse is such as to produce an indication 1 dB below the upper limit of the primary indicator range. Positive polarities: (Weighting Z set the generator signal to single, Lzpeak)

	ang z, set the ger	icrator signar to sir	igic, Ezpeare)	
Ref. level	Response to 10 ms	Response to 100 us	Tolerance	Deviation
dB	dB	dB	+/- dB	dB
119.0	119.0	119.2	2.0	0.2
Negative polarities:				
Ref. level	Response to 10 ms	Response to 100 us	Tolerance	Deviation
dB	dB	dB	+/- dB	dB
119.0	119.0	119.2	2.0	0.2

# **RMS ACCURACY TEST**

The RMS detector accuracy is tested on the reference range for a crest factor of 3.

Test frequency: Amplitude: Burst repetition frequency: Tone burst signal:		40 Hz	per limit of the primar wave of frequency 2	, .	to INT)
	Ref. Level	Expected level	Tone burst signal	Tolerance	Deviation
Time wighting	dB	dB	indication(dB)	+/- dB	dB
Slow	118.0+6.6	118.0	118.0	0.5	0.0

## TIME WEIGHTING IMPULSE TEST

Time weighting I is tested on the reference range(Set the SLM to LAImax)Test frequency:2000 HzAmplitude:The upper limit of the primary indicator range.

Single sinusoidal burst of duration 5 ms:

Ref. Level	Ref. Level Single burst in		Tolerance	Deviation
dB	Expected (dB)	Actual (dB)	+/- dB	dB
120.0	111.2	111.0	2.0	-0.2

## Repeated at 100 Hz

Ref. Level	Repeated bu	irst indication	Tolerance	Deviation
dB	Expected (dB)	Actual (dB)	+/- dB	dB
120.0	117.3	117.1	1.0	-0.2

## TIME AVERAGING TEST

This test compares the SLM reading for continuous sine signals with readings obtained from a sine tone burst sequence having the same RMS level. The test level is 30 dB below the upper limit of the linearity range and repeated for Type 1 SLM with 40 dB below the upper limit of the linearity.

Frequency of tone burst: 4000 Hz

Duration of tone burst:	1 ms					
Repetition Time	Level of	Expected	Actual	Tolerance	Deviation	Remarks
	tone burst	Leq	Leq			



综合試驗有限公司 SOILS & MATERIALS ENGINEERING CO., LTD. 香港黄竹坑道37號利達中心12樓 12/F., Leader Centre, 37 Wong Chuk Hang Road, Aberdeen, Hong Kong. E-mail: smec@cigismec.com Website: www.cigismec.com

Tel: (852) 2873 6860 Fax: (852) 2555 7533

# SMECLab

Test Data for Sound Level M	eter						Page 5 of 6
Sound level meter type: Microphone type:	XL2 MC230A		Serial N Serial N		A-15360-EO 6673	Date 17	-Feb-2020
						Report: 200	CA0214 01-01
msec	dB	dB	dB	+/- dB	dB		
1000	90.0	90.0	90.0	1.0	0.0	60s integ.	
10000	80.0	80.0	79.9	1.0	-0.1	6min. integ.	

# PULSE RANGE AND SOUND EXPOSURE LEVEL TEST

The test tone burst signal is superimposed on a baseline signal corresponding to the lower limit of reference range

Test frequency: 4000 Hz

Integration time: 10 sec

The integrating sound level meter set to Leq:

Duration	Rms level of	Expected	Actual	Tolerance	Deviation
msec	tone burst (dB)	dB	dB	+/- dB	dB
10	88.0	58.0	58.0	1.7	0.0

## The integrating sound level meter set to SEL:

Duration	Rms level of	Expected	Actual	Tolerance	Deviation
msec	tone burst (dB)	dB	dB	+/- dB	dB
10.0	88.0	68.0	68.0	1.7	0.0

## OVERLOAD INDICATION TEST

For SLM capable of operating in a non-integrating mode.

Test frequer	ncy:	2000 Hz					
Amplitude:		2 dB below the upper limit of the primary indicator range.					
Burst repetit	ion frequency:	40 Hz					
Tone burst s	signal:	11 cycles of a sin	e wave of freque	ency 2000 Hz.			
Level	Level reduced by	Further reduced	Difference	Tolerance	Deviation		
at overload (dB)	1 dB	3 dB	dB	dB	dB		
121.1	120.1	117.1 3.0 1.0					

For integrating SLM, with the instrument indicating Leq.

U	•	trument indicating Le primposed on a base		•	•
Test frequer		4000 Hz	5 1	ç	
Integration t	ime:	10 sec			
Single burst	duration:	1 msec			
Rms level	Level reduced by	Expected level	Actual level	Tolerance	Deviation
at overload (dB)	1 dB	dB	dB	dB	dB
127.1	126.1	86.1	86.1	2.2	0.0

# ACOUSTIC TEST

The acoustic test of the complete SLM is tested at the frequency 125 Hz and 8000 Hz using a B&K type 4226 Multifunction Acoustic Calibrator. The test is performed in A weighting.

Frequency	Expected level	Actual level	Tolerar	nce (dB)	Deviation
Hz	dB	Measured (dB)	+	-	dB



综合試驗 有限公司 SOILS & MATERIALS ENGINEERING CO., LTD. 香港黄竹坑道37號利達中心12樓 12/F., Leader Centre, 37 Wong Chuk Hang Road, Aberdeen, Hong Kong. E-mail: smec@cigismec.com Website: www.cigismec.com

Tel: (852) 2873 6860 Fax: (852) 2555 7533

# SMECLab

Page 6 of 6

Test Data for Sound Level Meter

Sound level me Microphone	eter type: type:	XL2 MC230A		Serial No. Serial No.		A-15360-EO	Date	17-Feb-2020
Microphone	type.	WICZ30A		ocharitto.	ЛС	,070	Report	: 20CA0214 01-01
1000	94.0		94.0		0.0	0.0	0.0	
125	77.9		77.9		1.0	1.0	0.0	
8000	92.9		93.0		1.5	3.0	0.1	

-----END------



# 综合試驗有限公司 SOILS & MATERIALS ENGINEERING CO., LTD.

香港黃竹坑道37號利達中心12樓 12/F., Leader Centre, 37 Wong Chuk Hang Road, Aberdeen, Hong Kong. E-mail: smec@cigismec.com Website: www.cigismec.com Tel: (852) 2873 6860 Fax: (852) 2555 7533



# CERTIFICATE OF CALIBRATION

Certificate No.:	19CA1127 02		Page	1	of	2
Item tested						
Description:	Sound Level Mete	r (Type 1)	Microphone			
Manufacturer:	B & K		B&K			
Type/Model No.:	2236	3	1188			
Serial/Equipment No.:	2100736	,	2288041			
Adaptors used:	-	,				
Item submitted by						
Customer Name:	Lam Environmenta	al Service Ltd.				
Address of Customer:						
Request No.:	-					
Date of receipt:	27-Nov-2019					
Date of test:	29-Nov-2019					
		ration				
Date of test: Reference equipment Description:		ration Serial No.	Expiry Date:		Traceabl	e to:
Reference equipment	used in the calib		Expiry Date: 23-Aug-2020		Traceabl CIGISMEC	
Reference equipment Description: Multi function sound calibrator	used in the calib Model:	Serial No.				
Reference equipment	used in the calib Model: B&K 4226	Serial No. 2288444	23-Aug-2020		CIGISMEC	
Reference equipment Description: Multi function sound calibrator Signal generator	used in the calib Model: B&K 4226	Serial No. 2288444	23-Aug-2020		CIGISMEC	
Reference equipment Description: Multi function sound calibrator Signal generator Ambient conditions	used in the calib Model: B&K 4226 DS 360	Serial No. 2288444	23-Aug-2020		CIGISMEC	

## Test specifications

- 1, The Sound Level Meter has been calibrated in accordance with the requirements as specified in BS 7580: Part 1: 1997 and the lab calibration procedure SMTP004-CA-152.
- 2, The electrical tests were performed using an electrical signal substituted for the microphone which was removed and replaced by an equivalent capacitance within a tolerance of ±20%.
- The acoustic calibration was performed using an B&K 4226 sound calibrator and corrections was applied for the difference between the free-field and pressure responsess of the Sound Level Meter.

# Test results

This is to certify that the Sound Level Meter conforms to BS 7580: Part 1: 1997 for the conditions under which the test was performed.


Details of the performed measurements are presented on page 2 of this certificate.

Actual Measurement data are documented on worksheets.

Approved Signatory:

1 Feng Jungi

29-Nov-2019 Company Chop:



**Comments:** The results reported in this certificate refer to the condition of the instrument on the date of calibration and carry no implication regarding the long-term stability of the instrument.

Date:

© Soils & Materials Engineering Co., Ltd.

Form No.CARP152-1/Issue 1/Rev.C/01/02/2007



# 綜合試驗有限公司 SOILS & MATERIALS ENGINEERING CO., LTD.

香港黄竹坑道37號利達中心12樓 12/F., Leader Centre, 37 Wong Chuk Hang Road, Aberdeen, Hong Kong. E-mail: smec@cigismec.com Website: www.cigismec.com

19CA1127 02

Tel: (852) 2873 6860 Fax: (852) 2555 7533



2

# **CERTIFICATE OF CALIBRATION**

(Continuation Page)

Page 2 of

### 1, Electrical Tests

Certificate No.:

The electrical tests were perfomed using an equivalent capacitance substituted for the microphone. The results are given in below with test status and the estimated uncertainties. The "Pass" means the result of the test is inside the tolerances stated in the test specifications. The "-" means the result of test is outside these tolerances.

Test:	Subtest:	Status:	Expanded Uncertanity (dB)	Coverage Factor
Self-generated noise	А	Pass	0.3	
Sen generated heree	C	Pass	1.0	2.1
	Lin	Pass	2.0	2.2
Linearity range for Leg	At reference range, Step 5 dB at 4 kHz	Pass	0.3	
	Reference SPL on all other ranges	Pass	0.3	
	2 dB below upper limit of each range	Pass	0.3	
	2 dB above lower limit of each range	Pass	0.3	
Linearity range for SPL	At reference range, Step 5 dB at 4 kHz	Pass	0.3	
Frequency weightings	A	Pass	0.3	
, , , , , ,	С	Pass	0.3	
	Lin	Pass	0.3	
Time weightings	Single Burst Fast	Pass	0.3	
0	Single Burst Slow	Pass	0.3	
Peak response	Single 100µs rectangular pulse	Pass	0.3	
R.M.S. accuracy	Crest factor of 3	Pass	0.3	
Time weighting I	Single burst 5 ms at 2000 Hz	Pass	0.3	
0	Repeated at frequency of 100 Hz	Pass	0.3	
Time averaging	1 ms burst duty factor 1/10 <sup>3</sup> at 4kHz	Pass	0.3	
	1 ms burst duty factor 1/10 <sup>4</sup> at 4kHz	Pass	0.3	
Pulse range	Single burst 10 ms at 4 kHz	Pass	0.4	
Sound exposure level	Single burst 10 ms at 4 kHz	Pass	0.4	
Overload indication	SPL	Pass	0.3	
	Leq	Pass	0.4	

### 2, Acoustic tests

The complete sound level meter was calibrated on the reference range using a B&K 4226 acoustic calibrator with 1000Hz and SPL 94 dB. The sensitivity of the sound level meter was adjusted. The test result at 125 Hz and 8000 Hz are given in below with test status and the estimated uncertainties.

Test:	Subtest	Status	Expanded Uncertanity (dB)	Coverage Factor
Acoustic response	Weighting A at 125 Hz	Pass	0.3	
	Weighting A at 8000 Hz	Pass	0.5	

### 3, Response to associated sound calibrator

### N/A

The expanded uncertainties have been calculated in accordance with the ISO Publication "Guide to the expression of uncertainty in measurement", and gives an interval estimated to have a level of confidence of 95%. A coverage factor of 2 is assumed unless explicitly stated.

	1	- End -	ſ
Calibrated by:	1~1	Checked by:	Aum
	Fung Chi Yip		Shek Kwong Tat
Date:	29-Nov-2019	Date:	29-Nov-2019

The standard(s) and equipment used in the calibration are traceable to national or international recognised standards and are calibrated on a schedule to maintain the required accuracy level.

© Soils & Materials Engineering Co., Ltd.

Form No.CARP152-2/Issue 1/Rev.C/01/02/2007



# 综合試驗有限公司 SOILS & MATERIALS ENGINEERING CO., LTD. 香港黄竹坑道 3 7號利達中心 1 2樓

育 絶 寅 竹 坑 垣 3 7 號 শ 建 中 心 1 2 诿 12/F., Leader Centre, 37 Wong Chuk Hang Road, Aberdeen, Hong Kong. E-mail: smec@cigismec.com Website: www.cigismec.com Tel: (852) 2873 6860 Fax: (852) 2555 7533

# SMECLab

Test Data for So	und Level M	eter				Page 1 of 6
Sound level me	eter type:	2236	Serial No.	2100736	Date	29-Nov-2019
Microphone	type:	4188	Serial No.	2288941		
					Report	: 19CA1127 02

# SELF GENERATED NOISE TEST

The noise test is performed in the most sensitive range of the SLM with the microphone replaced by an equivalent impedance.

Noise level in A weighting	< 20. 0	dB
Noise level in C weighting	21.0	dB
Noise level in Lin	26.5	dB

# LINEARITY TEST

The linearity is tested relative to the reference sound pressure level using a continuous sinusoidal signal of frequency 4 kHz. The measurement is made on the reference range for indications at 5 dB intervals starting from the 94 dB reference sound pressure level. And until within 5 dB of the upper and lower limits of the reference range, the measurements shall be made at 1 dB intervals.(SLM set to LEQ/SPL)

Reference/Expected level	Actua	llevel	Tolerance	Devia	Deviation		
Reference/Expected level	non-integrated	integrated		non-integrated	integrated		
dB	dB	dB	+/- dB	dB	dB		
94.0	94.0	94.0	0.7	0.0	0.0		
99.0	99.0	99.0	0.7	0.0	0.0		
104.0	104.0	104.0	0.7	0.0	0.0		
109.0	109.0	109.0	0.7	0.0	0.0		
114.0	114.0	114.0	0.7	0.0	0.0		
119.0	119.0	119.0	0.7	0.0	0.0		
124.0	123.9	123.9	0.7	-0.1	-0.1		
125.0	124.9	124.9	0.7	-0.1	-0.1		
126.0	125.9	125.9	0.7	-0.1	-0.1		
127.0	126.9	126.9	0.7	-0.1	-0.1		
128.0	127.9	127.9	0.7	-0.1	-0.1		
129.0	128.9	128.9	0.7	-0.1	-0.1		
130.0	129.8	129.8	0.7	-0.2	-0.2		
89.0	89.0	89.0	0.7	0.0	0.0		
84.0	84.1	84.1	0.7	0.1	0.1		
79.0	79.0	79.0	0.7	0.0	0.0		
74.0	74.1	74.1	0.7	0.1	0.1		
69.0	69.0	69.0	0.7	0.0	0.0		
64.0	64.0	64.0	0.7	0.0	0.0		
59.0	59.0	59.0	0.7	0.0	0.0		
54.0	54.0	54.0	0.7	0.0	0.0		
53.0	53.0	53.0	0.7	0.0	0.0		
52.0	52.1	52.1	0.7	0.1	0.1		
51.0	51.1	51.1	0.7	0.1	0.1		

(c)Soils Materials Eng. Co., Ltd.

Form No.: CAWS 152/Issue 1/Rev. B/01/02/2007



# 综合試驗有限公司 SOILS & MATERIALS ENGINEERING CO., LTD.

香港黄竹坑道37號利達中心12樓 12/F., Leader Centre, 37 Wong Chuk Hang Road, Aberdeen, Hong Kong. E-mail: smec@cigismec.com Website: www.cigismec.com Tel: (852) 2873 6860 Fax: (852) 2555 7533

# SMECLab

Test Data for Sou	und Level Me	eter					Page 2 of 6
Sound level me Microphone	eter type: type:	2236 4188		Serial No. Serial No.	2100736 2288941	Date	29-Nov-2019
	-71					Repo	rt: 19CA1127 02
50.0		50.2	50.2	0.7	1	0.2	0.2

# Measurements for an indication of the reference SPL on all other ranges which include it

Other ranges	Expected level	Actual level	Tolerance	Deviation
dB	dB	dB	+/- dB	dB
60-140	94.0	94.1	0.7	0.1
50-130	94.0	94.0	0.7	0.0
40-120	94.0	93.9	0.7	-0.1
30-110	94.0	93.9	0.7	-0.1
20-100	94.0	93.9	0.7	-0.1

# Measurements on all level ranges for indications 2 dB below the upper limit and 2 dB above the lower limit

Ranges	Reference/Expected level	Actual level	Tolerance	Deviation
dB	dB	dB	+/- dB	dB
60-140	62.0	62.1	0.7	0.1
00-140	138.0	137.8	0.7	-0.2
50-130	52.0	52.1	0.7	0.1
50-150	128.0	127.9	0.7	-0.1
40-120	42.0	42.1	0.7	0.1
40-120	118.0	117.9	0.7	-0.1
30-110	32.0	32.2	0.7	0.2
30-110	108.0	107.9	0.7	-0.1
20-100	30.0	30.1	0.7	0.1
20-100	98.0	97.9	0.7	-0.1

# FREQUENCY WEIGHTING TEST

The frequency response of the weighting netwoks are tested at octave intervals over the frequency ranges 31.5 Hz to 12500 Hz. The signal level at 1000 Hz is set to give an indication of the reference SPL. Frequency weighting A:

Frequency	Ref. level	Expected level	Actual level	Tolerar	nce(dB)	Deviation
Hz	dB	dB	dB	+	-	dB
1000.0	94.0	94.0	94.0	0.0	0.0	0.0
31.6	94.0	54.6	54.6	1.5	1.5	0.0
63.1	94.0	67.8	67.8	1.5	1.5	0.0
125.9	94.0	77.9	77.9	1.0	1.0	0.0
251.2	94.0	85.4	85.4	1.0	1.0	0.0
501.2	94.0	90.8	90.8	1.0	1.0	0.0
1995.0	94.0	95.2	95.2	1.0	1.0	0.0
3981.0	94.0	95.0	95.0	1.0	1.0	0.0
7943.0	94.0	92.9	92.9	1.5	3.0	0.0

(c)Soils Materials Eng. Co., Ltd.

Form No.: CAWS 152/Issue 1/Rev. B/01/02/2007



# 綜合試驗有限公司

SOILS & MATERIALS ENGINEERING CO., LTD. 香港黄竹坑道37號利達中心12樓

12/F., Leader Centre, 37 Wong Chuk Hang Road, Aberdeen, Hong Kong. E-mail: smec@cigismec.com Website: www.cigismec.com Tel: (852) 2873 6860 Fax: (852) 2555 7533

# SMECLab

und level mete crophone		36 88	Serial No. Serial No.		)0736 38941		Nov-201
						Report: 190	A1127 02
12590.0	94.0	89.7	89.6	3.0	6.0	-0.1	
requency weigh							1
Frequency	Ref. level	Expected level	Actual level	Tolera	nce(dB)	Deviation	
Hz	dB	dB	dB	+	-	dB	
1000.0	94.0	94.0	94.0	0.0	0.0	0.0	
31.6	94.0	91.0	91.0	1.5	1.5	0.0	
63.1	94.0	93.2	93.2	1.5	1.5	0.0	
125.9	94.0	93.8	93.9	1.0	1.0	0.1	
251.2	94.0	94.0	94.0	1.0	1.0	0.0	
501.2	94.0	94.0	94.1	1.0	1.0	0.1	
1995.0	94.0	93.8	93.9	1.0	1.0	0.1	
3981.0	94.0	93.2	93.2	1.0	1.0	0.0	
7943.0	94.0	91.0	91.0	1.5	3.0	0.0	
12590.0	94.0	87.8	87.8	3.0	6.0	0.0	
equency weigh	ting Lin:						
Frequency	Ref. level	Expected level	Actual level	Tolerar	nce(dB)	Deviation	
Hz	dB	dB	dB	+	-	dB	
1000.0	94.0	94.0	94.0	0.0	0.0	0.0	
31.6	94.0	94.0	94.0	1.5	1.5	0.0	
63.1	94.0	94.0	94.0	1.5	1.5	0.0	
125.9	94.0	94.0	94.0	1.0	1.0	0.0	
251.2	94.0	94.0	93.9	1.0	1.0	-0.1	
501.2	94.0	94.0	93.9	1.0	1.0	-0.1	
1995.0	94.0	94.0	93.9	1.0	1.0	-0.1	
3981.0	94.0	94.0	94.0	1.0	1.0	0.0	
7943.0	94.0	94.0	94.1	1.5	3.0	0.1	

# TIME WEIGHTING FAST TEST

12590.0

94.0

Time weighting F is tested on the reference range with a single sinusoidal burst of duration 200 ms at a frequency 2000 Hz and an amplitude which produces an indication 4 dB below the upper limit of the primary indicator range when the signal is continuous. (Weight A, Maximum hold)

94.2

3.0

6.0

0.2

Ref. level	Expected level	Actual level	Tolera	nce(dB)	Deviation
dB	dB	dB	+	-	dB
109.0	108.0	108.1	1.0	1.0	0.1

94.0

# TIME WEIGHTING SLOW TEST

Time weighting S is tested on the reference range with a single sinusoidal burst of duration 500 ms at a frequency 2000 Hz and an amplitude which produces an indication 4 dB below the upper limit of the primary indicator range when the signal is continuous. (Weight A, Maximum hold)

Ref. level	Expected level		Tolerance(dB)	Deviation
dB	dB	dB	+ -	dB



# 綜合試驗有限公司 SOILS & MATERIALS ENGINEERING CO., LTD.

E-mail: smec@cigismec.com

香港黃竹坑道37號利達中心12樓 12/F., Leader Centre, 37 Wong Chuk Hang Road, Aberdeen, Hong Kong.

Website: www.cigismec.com

Tel: (852) 2873 6860 Fax: (852) 2555 7533

# SMECLab

Test Data for Sound Level M	eter						Page 4 of 6
Sound level meter type: Microphone type:	2236 4188		Serial No. Serial No.		)0736 38941	Date	29-Nov-2019
						Report	: 19CA1127 02
109.0		104.9	104.8	1.0	1.0	-0.1	

## PEAK RESPONSE TEST

The onset time of the peak detector is tested on the reference range by comparing the response to a 100 us rectangular test pulse with the response to a 10 ms reference pulse of the same amplitude. The amplitude of the 10 ms reference pulse is such as to produce an indication 1 dB below the upper limit of the primary indicator range. Positive polarities: (Weighting L, set the generator signal to single, LLPeak)

Ref. level	Response to 10 ms	Response to 100 us	Tolerance	Deviation
dB	dB	dB	+/- dB	dB
112.0	112.0	112.1	2.0	0.1
Negative polarities:				
Ref. level	Response to 10 ms	Response to 100 us	Tolerance	Deviation
dB	dB	dB	+/- dB	dB
112.0	112.0	112.1	2.0	0.1

## RMS ACCURACY TEST

The RMS detector accuracy is tested on the reference range for a crest factor of 3.

Test frequency Amplitude: Burst repetition Tone burst sig	n frequency:	40 Hz	per limit of the primar e wave of frequency 2	,	to INT)
	Ref. Level	Expected level	Tone burst signal	Tolerance	Deviation
Time wighting	dB	dB	indication(dB)	+/- dB	dB
Slow	111.0+6.6	111.0	110.8	0.5	-0.2

## TIME WEIGHTING IMPULSE TEST

Time weighting I is tested on the reference range(Set the SLM to LAImax)Test frequency:2000 HzAmplitude:The upper limit of the primary indicator range.

Single sinusoidal burst of duration 5 ms:

Ref. Level	Single burs	Single burst indication		Deviation
dB	Expected (dB)	Actual (dB)	+/- dB	dB
113.0	104.2	104.1	2.0	-0.1

## Repeated at 100 Hz

Ref. Level	Repeated burst indication		Tolerance	Deviation
dB	Expected (dB)	Actual (dB)	+/- dB	dB
113.0	110.3	110.2	1.0	-0.1

## TIME AVERAGING TEST

This test compares the SLM reading for continuous sine signals with readings obtained from a sine tone burst sequence having the same RMS level. The test level is 30 dB below the upper limit of the linearity range and repeated for Type 1 SLM with 40 dB below the upper limit of the linearity.

Freq	uen	cy of	tone b	ourst:	4000 H:	Z
1414 P		100			100	

Duration of tone burst: 1 ms



# 综合試驗有限公司 SOILS & MATERIALS ENGINEERING CO., LTD.

香 港 黃 竹 坑 道 3 7 號 利 達 中 心 1 2 樓 12/F., Leader Centre, 37 Wong Chuk Hang Road, Aberdeen, Hong Kong. E-mail: smec@cigismec.com Website: www.cigismec.com Tel: (852) 2873 6860 Fax: (852) 2555 7533

# SMECLab

Page 5 of 6

Test Data for Sound Level Meter

							0
Sound level meter type:	2236		Serial N	lo. 210	0736	Date 2	29-Nov-2019
Microphone type:	4188		Serial N	lo. 228	8941	Report:	I9CA1127 02
Repetition Time	Level of tone burst	Expected Leq	Actual Leq	Tolerance	Deviation	Remark	S
msec	dB	dB	dB	+/- dB	dB		
1000	100.0	100.0	99.6	1.0	-0.4	60s integ	
10000	90.0	90.0	89.3	1.0	-0.7	6min. inte	eg.

## PULSE RANGE AND SOUND EXPOSURE LEVEL TEST

The test tone burst signal is superimposed on a baseline signal corresponding to the lower limit of reference range Test frequency: 4000 Hz

reethequency	1000112
Integration time:	10 sec

The integrating sound level meter set to Leq:

Duration	Rms level of	Expected	Actual	Tolerance	Deviation
msec	tone burst (dB)	dB	dB	+/- dB	dB
10	116.0	86.0	85.8	1.7	-0.2

The integrating sound level meter set to SEL:

Duration	Rms level of	Expected	Actual	Tolerance	Deviation
msec	tone burst (dB)	dB	dB	+/- dB	dB
10.0	116.0	96.0	95.9	1.7	-0.1

# OVERLOAD INDICATION TEST

For SLM capable of operating in a non-integrating mode.

Test frequer Amplitude: Burst repetit		2000 Hz 2 dB below the up 40 Hz	oper limit of the p	primary indicator r	ange.
Tone burst s	signal:	11 cycles of a sine	e wave of freque	ency 2000 Hz.	
Level	Level reduced by	Further reduced	Difference	Tolerance	Deviation
at overload (dB)	1 dB	3 dB	dB	dB	dB
126.0	125.0	122.0	3.0	1.0	0.0

For integrating SLM, with the instrument indicating Leq.

 For integrating SLM, with the instrument indicating Leq and set to the reference range. The test signal as following:

 The test tone burst signal is superimposed on a baseline signal corresponding to the lower limit of reference range

 Test frequency:
 4000 Hz

 Integration time:
 10 sec

Single burst duration:		1 msec			
Rms level	Level reduced by	Expected level	Actual level	Tolerance	Deviation
at overload (dB)	1 dB	dB	dB	dB	dB
130.6	129.6	89.6	89.4	2.2	-0.2

# ACOUSTIC TEST

The acoustic test of the complete SLM is tested at the frequency 125 Hz and 8000 Hz using a B&K type 4226 Multifunction Acoustic Calibrator. The test is performed in A weighting.



综合試驗 有限公司 SOILS & MATERIALS ENGINEERING CO., LTD. 香港黄竹坑道37號利達中心12樓 12/F., Leader Centre, 37 Wong Chuk Hang Road, Aberdeen, Hong Kong. E-mail: smec@cigismec.com Website: www.cigismec.com

Tel: (852) 2873 6860 Fax: (852) 2555 7533

# SMECLab

Page 6 of 6

Test Data for Sound Level Meter

Sound level me	eter type:	2236	Serial No	). 2	100736	Date 2	29-Nov-2019
Microphone	type:	4188	Serial No	o. 2	288941	Report: 1	9CA1127 02
Frequency	Expecte	d level	Actual level	Tole	rance (dB)	Deviation	
Hz	dB		Measured (dB)	+	-	dB	
1000	94.0	)	94.0	0.0	0.0	0.0	
125	77.9	)	78.0	1.0	1.0	0.1	
8000	92.9	)	93.5	1.5	3.0	0.6	

-----END-----

(c)Soils Materials Eng. Co., Ltd.

Form No.: CAWS 152/Issue 1/Rev. B/01/02/2007



# 综合試驗有限公司 SOILS & MATERIALS ENGINEERING CO., LTD. 香港黃竹坑道 3 7號利達中心 1 2 樓

12/F., Leader Centre, 37 Wong Chuk Hang Road, Aberdeen, Hong Kong. E-mail: smec@cigismec.com Website: www.cigismec.com Tel: (852) 2873 6860 Fax: (852) 2555 7533



# **CERTIFICATE OF CALIBRATION**

Certificate No.:	20CA0107 02		Page:	1	of	2	
Item tested							
Description:	Acoustical Calibra	tor (Class 1)					
Manufacturer:	Larson Davis	( <i>'</i>					
Type/Model No.:	CAL200						
Serial/Equipment No.:	13128						
Adaptors used:	10120						
huaptors used.	-						
Item submitted by							
Curstomer:	Lam Environmenta	al Service Ltd.					
Address of Customer:	-						
Request No.:	-						
Date of receipt:	07-Jan-2020						
Date of test:	08-Jan-2020						
Reference equipmen	t used in the calib	ration					
Description:	Model:	Serial No.	Expiry Date:		Traceabl	e to:	

Description:	Model:	Serial No.	Expiry Date:	Traceable to:	
Lab standard microphone	B&K 4180	2341427	03-May-2020	SCL	
Preamplifier	B&K 2673	2239857	17-May-2020	CEPREI	
Measuring amplifier	B&K 2610	2346941	05-Jun-2020	CEPREI	
Signal generator	DS 360	33873	10-May-2020	CEPREI	
Digital multi-meter	34401A	US36087050	08-May-2020	CEPREI	
Audio analyzer	8903B	GB41300350	13-May-2020	CEPREI	
Universal counter	53132A	MY40003662	10-May-2020	CEPREI	

### Ambient conditions

Temperature:	21 ± 1 °C
Relative humidity:	55 ± 10 %
Air pressure:	1000 ± 5 hPa

### **Test specifications**

- 1, The Sound Calibrator has been calibrated in accordance with the requirements as specified in IEC 60942 1997 Annex B and the lab calibration procedure SMTP004-CA-156.
- 2, The calibrator was tested with its axis vertical facing downwards at the specific frequency using insert voltage technique.
- 3, The results are rounded to the nearest 0.01 dB and 0.1 Hz and have not been corrected for variations from a reference pressure of 1013.25 hectoPascals as the maker's information indicates that the instrument is insensitive to pressure changes.

### **Test results**

This is to certify that the sound calibrator conforms to the requirements of annex B of IEC 60942: 1997 for the conditions under which the test was performed. This does not imply that the sound calibrator meets IEC 60942 under any other conditions.

Details of the performed measurements are presented on page 2 of this certificate.

Feng Junqi



Approved Signatory:

**Comments:** The results reported in this certificate refer to the conditon of the instrument on the date of calibration and carry no implication regarding the long-term stability of the instrument.

Date:

08-Jan-2020

© Soils & Materials Engineering Co., Ltd.

Form No.CARP156-1/issue 1/Rev.D/01/03/2007

**Company Chop:** 



## 綜合試驗有限公司 SOILS & MATERIALS ENGINEERING CO., LTD. 香港黄竹坑道37號利達中心12樓 12/F., Leader Centre, 37 Wong Chuk Hang Road, Aberdeen, Hong Kong.

20CA0107 02

Tel: (852) 2873 6860 Fax: (852) 2555 7533



# CERTIFICATE OF CALIBRATION

(Continuation Page)

Website: www.cigismec.com

Certificate No.:

2 2 Page: of

#### 1, Measured Sound Pressure Level

E-mail: smec@cigismec.com

The output Sound Pressure Level in the calibrator head was measured at the setting and frequency shown using a calibrated laboratory standard microphone and insert voltage technique. The results are given in below with the estimated uncertainties.

Frequency	Output Sound Pressure	Measured Output	Estimated Expande
Shown	Level Setting	Sound Pressure Level	Uncertainty
Hz	dB	dB	dB
1000	94.00	93.76	0.10

#### 2, Sound Pressure Level Stability - Short Term Fluctuations

The Short Term Fluctuations was determined by measuring the maximum and minimum of the fast weighted DC output of the B&K 2610 measuring amplifier over a 20 second time interval as required in the standard. The Short Term Fluctuation was found to be:

At 1000 Hz	STF = 0.009 dB
Estimated expanded uncertainty	0.005 dB

Estimated expanded uncertainty

#### 3, **Actual Output Frequency**

The determination of actual output frequency was made using a B&K 4180 microphone together with a B&K 2673 preamplifier connected to a B&K 2610 measuring amplifier. The AC output of the B&K 2610 was taken to an universal counter which was used to determine the frequency averaged over 20 second of operation as required by the standard. The actual output frequency at 1 KHz was:

At 1000 Hz	Actual Frequency = 999.5 Hz	
Estimated expanded uncertainty	0.1 Hz	Coverage factor k = 2.2

#### 4, **Total Noise and Distortion**

For the Total Noise and Distortion measurement, the unfiltered AC output of the B&K 2610 measuring amplifier was connected to an Agilent Type 8903 B distortion analyser. The TND result at 1 KHz was:

At 1000 Hz	TND = 0.4 %
Estimated expanded uncertainty	0.7 %

The expanded uncertainties have been calculated in accordance with the ISO Publication "Guide to the expression of uncertainty in measurement", and gives an interval estimated to have a level of confidence of 95%. A coverage factor of 2 is assumed unless explicitly stated.

	1	-	End -	L
Calibrated by:	$\sim \gamma$		Checked by:	Alama
Date:	Fung Chi Yip 08-Jan-2020		Date:	Shek Kwong Tat 08-Jan-2020

The standard(s) and equipment used in the calibration are traceable to national or international recognised standards and are calibrated on a schedule to maintain the required accuracy level.

© Soils & Materials Engineering Co., Ltd

Form No.CARP156-2/Issue 1/Rev.C/01/05/2005



1600 Washington Blvd Grants Pass, OR 97526 (541) 471-7111 (541) 471-7116 (Fax) Service@metone.com

# **Calibration Certificate**

The calibration results on this report certify that this instrument complies with the product specifications at the time of calibration. Calibration was performed according to accepted industry methods using equipment, procedures, and standards that are traceable to NIST and ISO.

Recommended calibration interval is 12 months from the first day of use.

Instrument Model#	Aerocet 831	Instrument Serial#	Y23153
Date of Calibration	10/30/2019	)	Sensor # <b>19493</b>
M. Schurmann	A 14	thun th	umer
Calibration Technici		Quality Check	
Temper	ature <u>23</u> <sup>O</sup> C	Relative Humidity 23	8%

# Test Procedure: Aerocet 831-6100

PSL Size (µm)	Test Results	Test Spec.	Lot# NIST	Expiration
0.3	Pass	± 10%	196947	04/30/2021
0.5	Pass	± 10%	180556	02/28/2020
1.0	Pass	± 10%	193291	1/31/2021
2.5	Pass	± 10%	181944	3/31/2020
4.0	Pass	± 10%	REF	NA
5.0	Pass	± 10%	214115	07/31/2022
7.0	Pass	± 10%	REF	NA
10.0	Pass	± 10%	187001	07/31/2020

		and the second contract of the second s	T
Standards	Model	SN	Cal Due
Particle Counter	GT-526	M1762	1/30/2020
DMM	189 Multimeter	94060816	10/2/2020
FLOWMETER	DEFENDER 510-M	172834	7/3/2020
RH/Temp Sensor	083E-1-35	R17149	8/5/2020
2			

This calibration certificate shall not be reproduced except in full, without the written approval of Met One Instruments Inc.



## Lam Environmental Services Limited

#### Portable Dust Meter Performance Check Record


Portable Dust Meter			
Туре	: _	Particulare Monitor	
Manufacturer	: .	Metone AEROCET 831	
Model Number	: _	831	
Serial Number	: _	Y23153	
Performance Check Date	: _	3-Jan-20	
Standard Equipment			
Туре	: _	High Volume Sampler	
Manufacturer	: _	TISCH	. <u></u>
Model Number	: _	TE-5170	
Equipment Number	: _	HVS018	
Last Calibration Date	:	29-Nov-19	

#### Portable Dust Meter Performance Check Results

Trial no. in 1-hr period	Time	Mean Pressure (hPa)	Mean Temp (°C)	Concentration in ug/m <sup>3</sup> (Standard equipment) (Y - Axis)	Concentration in ug/m <sup>3</sup> (Performance Check / Calibrated equipment) (X - Axis)
Zero Check	2/1/2019 08:00	1025	18	0	0
1	3/1/2020 09:26	1023	19	87	156
2	3/1/2020 10:27	1023	19	104	115
3	3/1/2020 11:28	1023	19	107	132

\* Filter paper weighting was conducted by HOKLAS accredited laboratory.

Linear Regression of Y on X		
Slope (K- factor)	:	0.7000
Correlation Coefficient	:	0.9180
Validity of Performance Check / Calibration Record	:	2/1/2021
	•	

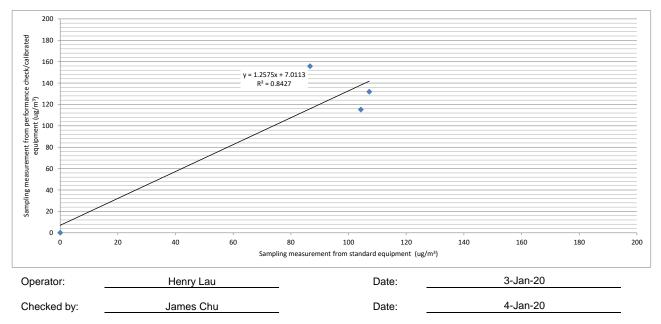

# Hal Technology

Certificate No.: 20190730-03

# **CERTIFICATE OF CALIBRATION AND TRACEABILITY**

This certifies that the particle counter **HAL-HPC301** (S/N: <u>3011907012</u>) for the Customer \_\_\_\_\_\_\_\_\_ was produced and calibrated according to the US Standards: ASTM F649-01 "Standard Practice for Secondary Calibration of Airborne Particle Counter Using Comparison Procedures" and ASTM F328-98 "Standard practice for Calibration of Airborne Particle Counter Using Monodisperse Spherical Particles". The instruments and the standard particles used for calibrations are listed as following:

NO	Name	Туре	S/N	Calibration
1	Standard Particles	299nm±6nm	3300-022 Lot# 24932	NIST
2	Standard Particles	498nm±5nm	3500-020 Lot# 34605	NIST
3	Standard Particles	707nm±6nm	3700-018 Lot# 35148	NIST
4	Standard Particles	0.993um±0.021um	4009-022 Lot# 25628	NIST
5	Standard Particles	2.001um±0.025um	4202-024 Lot# 25754	NIST
6	Standard Particles	5.0um±0.3um	DC-05-013 Lot# 34739	NIST
7	Flowmeter	4140	41400928015	TSI
8	Oscilloscope	V-1560/100MHz	6103147	Tektronics
9	Multi-channel Signal Analyzer	MCSA-16K	4401	CITMT

Note: ASTM — American Society for Testing and Materials NIST — National Institute of Standards and Technology

Zero Count Test: Passed

We would like to certify that all the materials, component, and workmanship used in manufacture of this equipment are in strict accordance with the applicable specifications agreed upon by Hal Technology and the customer and with all published specifications. All performance and acceptance tests required under this contract were successfully conducted according to required specifications according to required specifications and standard practice per ANSI/NCSL Z540 at the time of testing.

Test Conditions: Flow Rate <u>2.85 L/Min</u> Temperature <u>23</u> °C Humidity<u>47</u>%RH

Signatory

Cal Date 7-30-2019 Due Date 7-30-2020

On behalf of HAL Technology, LLC

Hal Technology, LLC, 7970 Cherry Avenue, Suite 303, Fontana, CA 92336 USA Phone/Fax: (855) GET-HALTECH or (855) 438-4258 (toll-free) Email: services@haltechnologies.com



## Lam Environmental Services Limited

#### Portable Dust Meter Performance Check Record


Portable Dust Meter		
Туре	:	Portable Dust Meter
Manufacturer	:	Hal Technology
Model Number	:	HAL-HPC301
Serial Number	: _	3011907012
Performance Check Date	: _	29-Aug-19
Standard Equipment		
Туре	: _	High Volume Sampler
Manufacturer	: _	TISCH
Model Number	: _	TE-5170
Equipment Number	:	HVS018
Last Calibration Date	: _	1-Aug-19

#### Portable Dust Meter Performance Check Results

Trial no. in 1-hr period	Time	Mean Pressure (hPa)	Mean Temp (°C)	Concentration in ug/m <sup>3</sup> (Standard equipment)	(Performance Check / Calibrated equipment)
				(Y - Axis)	(X - Axis)
Zero Check	29/8/2019 08:00	1002	29	0	0
1	29/8/2019 09:23	1002	29	30	32
2	29/8/2019 10:24	1002	29	42	26
3	29/8/2019 11:25	1002	29	33	25

\* Filter paper weighting was conducted by HOKLAS accredited laboratory.



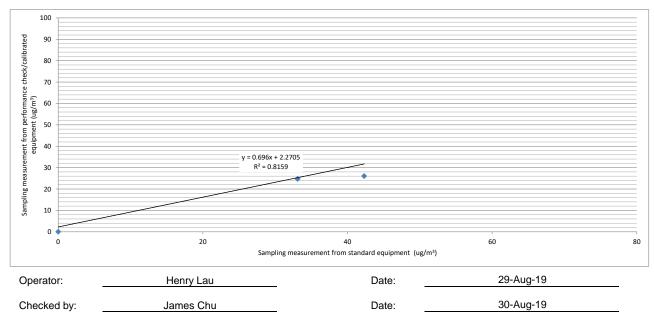



1600 Washington Blvd Grants Pass, OR 97526 (541) 471-7111 (541) 471-7116 (Fax) Service@metone.com

# **Calibration Certificate**

	cations at the time o ds using equipment, j						ted indust
Recom	mended calibration i	nterval is 12 mo	nths fro	om the fi	irst day of use.		
Instrur	ment Model# Aero	ocet 831			Instrument Se	erial# <b>W15448</b>	
Date of	Calibration 8/5/2	019		-		Sensor #	16438
Darle	een Best			A	25	-	
	ation Technician			Qual	ity Check		
	Temperature	24 <sup>o</sup> C			Relative Humidit	y 43 %	0
	PSL Size (μm) 0.3	Test Results Pass		Spec. 10%	Lot# NIST 196947	Expiration 04/30/2021	
	PSL Size (µm)	Test Results	Test	Spec.	Lot# NIST	Expiration	
						04/30/2021	
	0.5	Pass		10%	180556	02/28/2020	
	1.0	Pass		10%	193291	1/31/2021	
	2.5	Pass		10%	181944	3/31/2020	
	4.0	Pass		10%	REF	NA	
	5.0	Pass		10%	205967	12/31/2021	
	7.0	Pass		10%	REF	NA	
	10.0	Pass	ΞΊ	10%	187001	07/31/2020	
Г	Standards	Model			SN	Cal Due	
1	Particle Counter	GT-526			M1760	11/14/2019	
		Defender 51	10		143545	12/18/2019	
-	Dry Cal			40900121		2/4/2020	
-	Dry Cal DMM	287		40	0300121		

Document Aerocet 831-9600 Rev A

45539



## Lam Environmental Services Limited

#### Portable Dust Meter Performance Check Record

Portable Dust Meter			
Туре	:	Particulare Monitor	
Manufacturer	: .	Metone AEROCET 831	
Model Number	: .	831	
Serial Number	: .	W15448	
Performance Check Date	: .	30-Sep-19	
Standard Equipment			
Туре	: .	High Volume Sampler	
Manufacturer	: .	TISCH	
Model Number	: .	TE-5170	
Equipment Number	: .	HVS006	
Last Calibration Date	:	16-Sep-19	


#### Portable Dust Meter Performance Check Results

Trial no. in 1-hr period	Time	Mean Pressure (hPa)	Mean Temp (°C)	Concentration in ug/m <sup>3</sup> (Standard equipment)	Concentration in ug/m <sup>3</sup> (Performance Check / Calibrated equipment)
				(Y - Axis)	(X - Axis)
Zero Check	29/9/2019 08:00	1013	29	0	0
1	30/9/2019 08:16	1009	30	149	234
2	30/9/2019 09:17	1009	30	110	145
3	30/9/2019 10:18	1009	30	167	211

\* Filter paper weighting was conducted by HOKLAS accredited laboratory.

# Linear Regression of Y on X

Slope (K- factor)	:	0.7000
Correlation Coefficient	:	0.9806
Validity of Performance Check / Calibration Record	:	29/9/2020

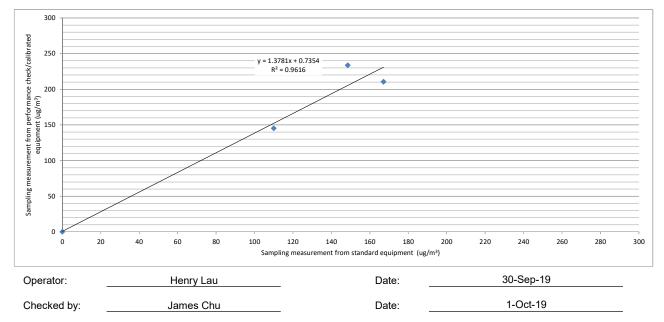



1600 Washington Blvd Grants Pass, OR 97526 (541) 471-7111 (541) 471-7116 (Fax) Service@metone.com

# **Calibration Certificate**

The calibration results on this report certify that this instrument complies with the product specifications at the time of calibration. Calibration was performed according to accepted industry methods using equipment, procedures, and standards that are traceable to NIST and ISO.

Recommended calibration interval is 12 months from the first day of use.

Instrument Model#	Aerocet 831		Instrument Serial# Y23154	
Date of Calibration	10/30/2019		Sensor # <b>19494</b>	
M. Schurmann	AT14		then Mumer	
Calibration Technici	an		Quality Check	
Temper	ature <b>23</b>	°C	Relative Humidity 23 %	

# Test Procedure: Aerocet 831-6100

PSL Size (µm)	Test Results	Test Spec.	Lot# NIST	Expiration
0.3	Pass	± 10%	196947	04/30/2021
0.5	Pass	± 10%	180556	02/28/2020
1.0	Pass	± 10%	193291	1/31/2021
2.5	Pass	± 10%	181944	3/31/2020
4.0	Pass	± 10%	REF	NA
5.0	Pass	± 10%	214115	07/31/2022
7.0	Pass	± 10%	REF	NA
10.0	Pass	± 10%	187001	07/31/2020

Standards	Model	SN	Cal Due	
Particle Counter	GT-526	M1762	1/30/2020	
DMM	189 Multimeter	94060816	10/2/2020	
FLOWMETER	DEFENDER 510-M	172834	7/3/2020	
RH/Temp Sensor	083E-1-35	R17149	8/5/2020	

This calibration certificate shall not be reproduced except in full, without the written approval of Met One Instruments Inc.

Document Aerocet 831-9600 Rev A



## Lam Environmental Services Limited

#### Portable Dust Meter Performance Check Record


Portable Dust Meter			
Туре	:	Particulare Monitor	
Manufacturer	:	Metone AEROCET 831	
Model Number	:	831	
Serial Number	:	Y23154	
Performance Check Date	:	3-Jan-20	
Standard Equipment			
Туре	:	High Volume Sampler	
Manufacturer	:	TISCH	
Model Number	:	TE-5170	
Equipment Number	:	HVS018	
Last Calibration Date	:	29-Nov-19	

#### Portable Dust Meter Performance Check Results

Trial no. in 1-hr period	Time	Mean Pressure (hPa)	Mean Temp (°C)	Concentration in ug/m <sup>3</sup> (Standard equipment) (Y - Axis)	Concentration in ug/m <sup>3</sup> (Performance Check / Calibrated equipment) (X - Axis)
Zero Check	2/1/2019 08:00	1025	18	0	0
1	3/1/2020 09:26	1023	19	87	153
2	3/1/2020 10:27	1023	19	104	112
3	3/1/2020 11:28	1023	19	107	125

\* Filter paper weighting was conducted by HOKLAS accredited laboratory.



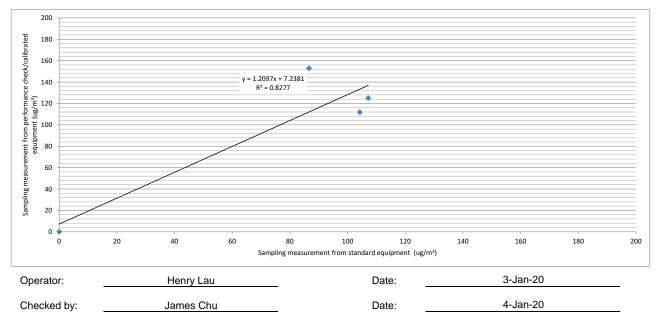

С	ertifica	<b>te of Ca</b> BT-645 Particulate Monitor	librati	on
Recom	mended calibration	n interval is 24 mont	ths from first da	y of use.
Unit Info	Model: BT-		ware Rev:	1.1.0
Serial	Number: X19	296		1.0.1
Calibra	ated By: <i>R. von</i>	Krohn	Cal. Date: 7/	/27/2018
	ty Inspector:/ Hz/μg/m <sup>3</sup> :6.	7h-	Date: 7	27-2018
Final Test				
	w (2.0 L/M): Pass		t T (C) <u>24.8</u>	
			t T (C) <u>24.8</u> RH, % <u>39</u>	
Flov Serial Commu				
Flov Serial Commu	nication: Pass		RH, % <u>39</u>	
Flov Serial Commu BT-645 Co	nication: Pass		RH, % <u>39</u>	Cal Due
Flow Serial Commu BT-645 Co Calibration Standar Standards	nication: Pass onc.: <u>416.59</u>	Standard Conc:	RH, % <u>39</u> <u>412.22</u>	Cal Due 8/28/2018
Flov Serial Commu BT-645 Cc Calibration Standar Standards DMM Multimeter RH &TEMPERATURE	nication: Pass onc.: <u>416.59</u> rds Manufacturer Fluke Met One Instruments	Standard Conc: Model 189 Multimeter 083E-1-35	RH, % <u>39</u> 412.22 SN	
Flov Serial Commu BT-645 Cc Calibration Standar Standards DMM Multimeter RH &TEMPERATURE BAROMETRIC	nication: Pass onc.: <u>416.59</u> rds Manufacturer Fluke	Standard Conc: Model 189 Multimeter	RH, % <u>39</u> 412.22 SN 94060816	8/28/2018
Flov Serial Commu BT-645 Co Calibration Standar	nication: Pass onc.: <u>416.59</u> rds Manufacturer Fluke Met One Instruments	Standard Conc: Model 189 Multimeter 083E-1-35	RH, % <u>39</u> <u>412.22</u> <u>SN</u> 94060816 R17149	8/28/2018 July 28, 2018
Flov Serial Commu BT-645 Co Calibration Standar Standards DMM Multimeter RH &TEMPERATURE BAROMETRIC PRESSURE	nication: Pass onc.: <u>416.59</u> rds Manufacturer Fluke Met One Instruments Met One Instruments	Standard Conc: Model 189 Multimeter 083E-1-35 092	RH, % <u>39</u> <u>412.22</u> <u>SN</u> 94060816 R17149 P22757	8/28/2018 July 28, 2018 April 2, 2019

Document No. BT-645-9600, Rev A



## Lam Environmental Services Limited

#### Portable Dust Meter Performance Check Record


Portable Dust Meter		
Туре	:	Particulare Monitor
Manufacturer	:	MET ONE INSTRUMENTS
Model Number	:	BT645
Serial Number	:	X19296
Performance Check Date	:	30-Sep-19
Standard Equipment		
Туре	:	High Volume Sampler
Manufacturer	:	TISCH
Model Number	:	TE-5170
Equipment Number	: ,	HVS006
Last Calibration Date	:	16-Sep-19

#### Portable Dust Meter Performance Check Results

	Trial no. in 4 hr			Concentration in ug/m <sup>3</sup>	Concentration in ug/m <sup>3</sup>
Trial no. in 1-hr period	Time	Mean Pressure (hPa)	Mean Temp (°C)	(Standard equipment)	(Performance Check / Calibrated equipment)
				(Y - Axis)	(X - Axis)
Zero Check	29/9/2019 08:00	1013	29	0	0
1	30/9/2019 08:12	1009	30	149	121
2	30/9/2019 09:13	1009	30	110	71
3	30/9/2019 10:14	1009	30	167	88

\* Filter paper weighting was conducted by HOKLAS accredited laboratory.

# Linear Regression of Y on X Slope (K- factor) Correlation Coefficient Validity of Performance Check / Calibration Record

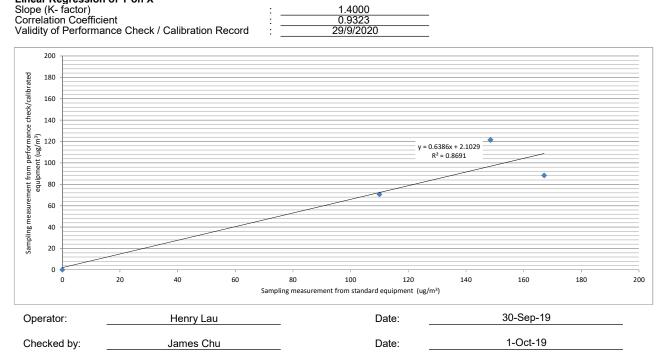

	u <b>ments, Inc.</b> hington Blvd, Grants Pa 7111 Fax (541) 471-7 <sup>-</sup>								
Certificate of Calibration BT-645 Particulate Monitor									
Recom	mended calibration	n interval is 24 me	onths from first day	of use.					
Unit Info	Model: <u>BT-</u>	645 81865-1 F	irmware Rev:	1.1.0					
Serial I	Number:	298		1.0.1					
Calibra	tod By: D	K	Cal. Date: 7/2	27/2018					
Cambra	ted By: <u><i>R. von</i></u>	Kronn							
Quality	Inspector:	h	Date: 7-	27-2018					
Calibration	Hz/μg/m <sup>3</sup> : 7.	7							
Cambration	Π <i>μ</i> g/m ·/.	/							
Final Test									
Flow	(2.0 L/M): Pass	Aml	bient T (C) _24.8						
			RH, % 39						
Serial Commun	ication: Pass								
BT-645 Cor	nc.: <u>413.48</u>	Standard Conc:	412.22						
Calibration Standard	Is								
Standards	Manufacturer	Model	SN	Cal Due					
DMM Multimeter RH &TEMPERATURE	Fluke Met One Instruments	189 Multimeter 083E-1-35	94060816 R17149	8/28/2018 July 28, 2018					
BAROMETRIC	Met One Instruments	092	P22757	April 2, 2019					
PRESSURE Primary Flow Meter	BIOS	DC-Lite	R537	May 29, 2019					
LD-3B									
		alate da la la de la la la la la composición de la composición de la composición de la composición de la compos							
standards are on recor	rd and traceable to NIS struments are calibrated	T to the extent allowed	or greater than the inst ed by the institute's calit urer's published specific	oration facility. Unless					



## Lam Environmental Services Limited

#### Portable Dust Meter Performance Check Record


Portable Dust Meter			
Туре	:	Particulare Monitor	
Manufacturer	: _	MET ONE INSTRUMENTS	
Model Number	: _	831	
Serial Number	: _	X19298	
Performance Check Date	:	08-Jul-19	
Standard Equipment			
Туре	: _	High Volume Sampler	
Manufacturer	: _	TISCH	
Model Number	: _	TE-5170	
Equipment Number	:	HVS018	
Last Calibration Date	:	08-Jul-19	

#### Portable Dust Meter Performance Check Results

Trial no. in 1-hr period	Time	Mean Pressure (hPa)	Mean Temp (°C)	Concentration in ug/m <sup>3</sup> (Standard equipment) (Y - Axis)	Concentration in ug/m <sup>3</sup> (Performance Check / Calibrated equipment) (X - Axis)
Zero Check	8/7/2019 12:38	1008	29	0	0
1	8/7/2019 08:23	1008	29	43	32
2	8/7/2019 09:26	1002	28	37	26
3	8/7/2019 10:30	1002	28	34	25

\* Filter paper weighting was conducted by HOKLAS accredited laboratory.




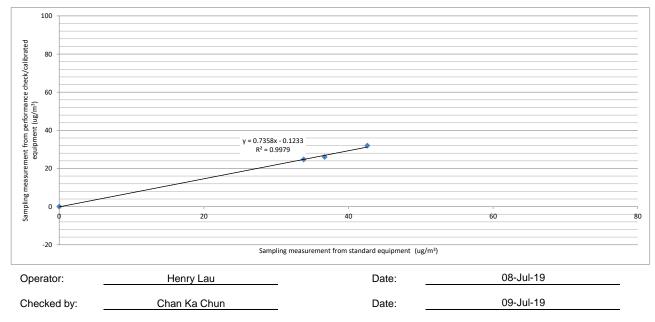





Appendix 4.3


Wind data extracted from Sha Tin HKO Automatic Weather Station

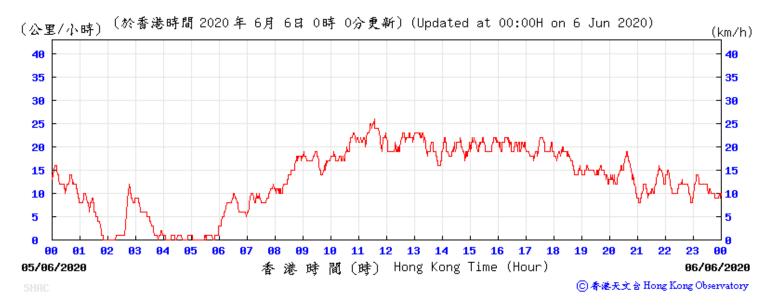


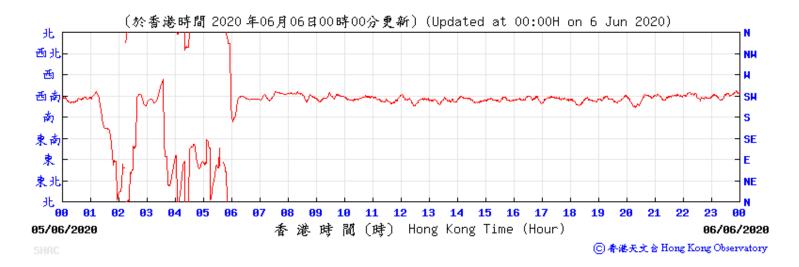





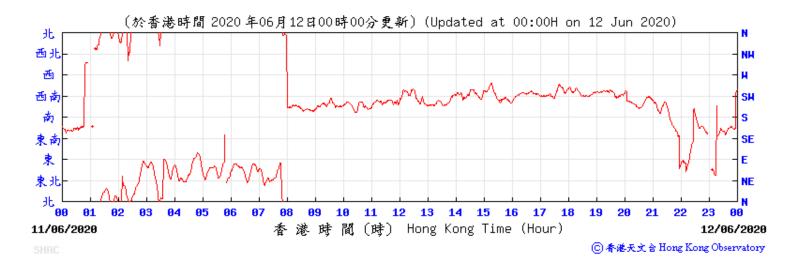


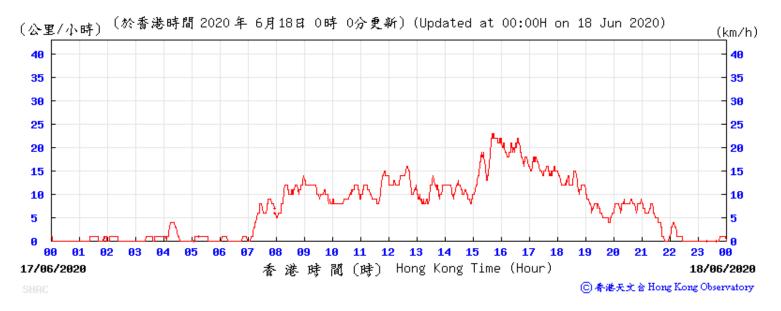


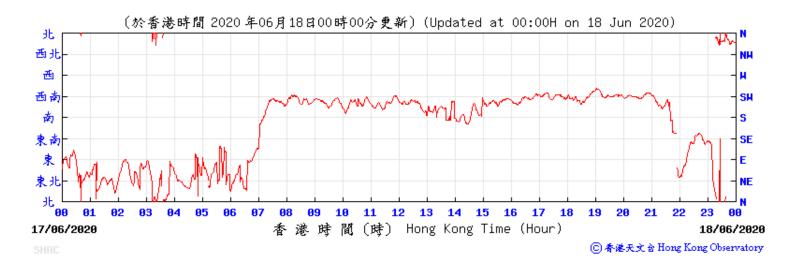

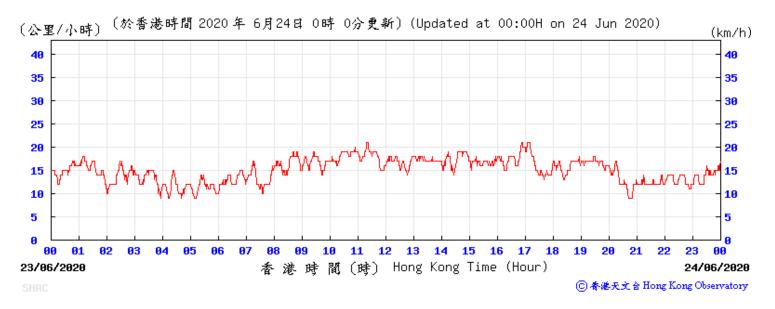

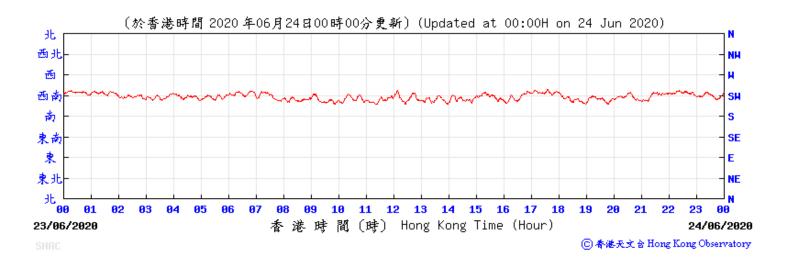

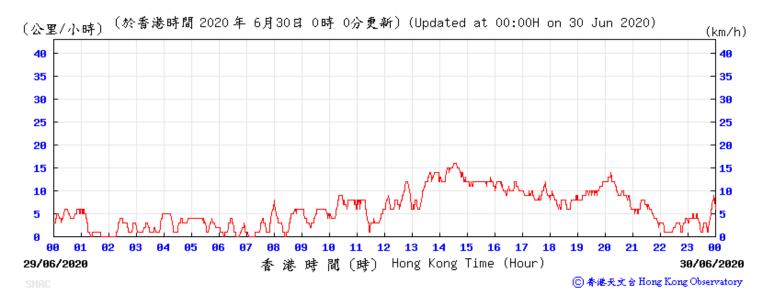

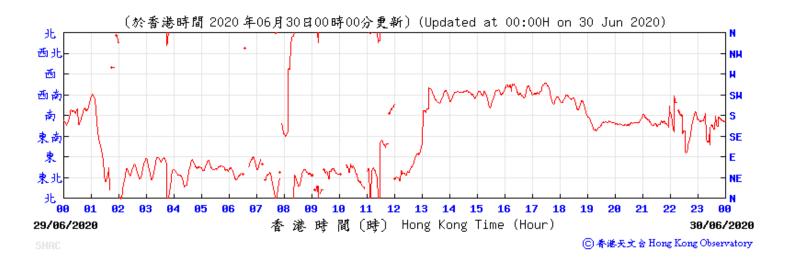



> Climate > Climate Information Service > Daily Extract

# **Daily Extract**

aily Extract of Meteorological Observations , June 2020 Back Year 2020 V Month 6 V Go										
Hong Kong Observatory										
Day	Mean	Air	Temperat	ure			Mean Amount	Total		
Duy	Pressure (hPa)	Absolute Daily Max (deg. C)	Mean (deg. C)	Absolute Daily Min (deg. C)	Mean Dew Point (deg. C)	Mean Relative Humidity (%)	of Cloud (%)	Rainfall (mm)		
01	1010.2	32.2	29.9	28.7	25.6	78	85	Trace		
02	1009.5	30.5	29.0	27.4	25.6	82	87	6.4		
03	1008.6	32.1	29.8	28.7	25.0	76	82	Trace		
04	1008.0	32.7	30.1	28.7	25.1	75	83	Trace		
05	1007.3	32.3	30.0	27.5	25.6	78	88	2.6		
06	1007.2	29.9	26.8	24.1	24.9	89	94	183.8		
07	1005.6	29.4	27.7	24.6	26.0	91	92	107.4		
08	1006.2	29.3	28.6	25.2	26.3	88	92	40.9		
09	1008.2	31.4	29.4	28.1	26.1	83	87	1.3		
10	1008.8	31.7	29.8	28.3	25.5	78	81	0.2		
11	1007.4	33.9	30.2	28.1	25.3	76	55	Trace		
12	1005.4	35.0	30.4	27.8	25.3	75	32	0.0		
13	1004.0	33.7	29.8	27.6	26.2	81	84	11.7		
14	1008.3	31.5	28.0	26.0	25.0	84	82	29.3		
15	1011.1	32.6	29.3	26.3	25.1	79	64	0.2		
16	1009.7	31.1	28.6	26.8	25.0	81	70	9.4		
17	1008.3	31.7	29.1	27.5	24.6	77	54	0.9		
18	1008.5	31.8	29.5	27.7	25.0	77	56	0.1		
19	1009.2	32.4	29.9	28.2	24.9	74	52	Trace		
20	1008.5	32.7	30.0	28.3	24.9	74	54	0.0		
21	1006.3	32.6	30.2	28.7	25.4	76	77	Trace		
22	1006.4	32.6	30.4	29.2	25.8	77	79	Trace		
23	1007.1	32.6	30.3	29.1	25.8	77	73	0.0		
24	1006.5	32.9	30.4	29.0	25.8	77	86	0.0		
	+									

1006.4 https://www.hko.gov.hk/en/cis/dailyExtract.htm?y=2020&m=06

32.4

30.2

29.1

25.5

76

87

0.1

25

Daily Extract

								LI
26	1007.9	32.0	30.3	29.4	25.8	77	86	1.3
27	1008.4	32.5	30.2	28.5	25.6	77	83	1.2
28	1007.8	33.0	30.4	28.5	25.3	75	81	Trace
29	1006.1	34.2	30.5	28.2	25.2	74	78	0.4
30	1004.6	34.9	30.7	28.7	25.5	74	72	Trace
Mean/Total	1007.6	32.3	29.6	27.8	25.4	79	76	397.2
Normal?	1006.1	30.2	27.9	26.2	24.6	82	77	456.1

Trace means rainfall less than 0.05 mm ? 1981-2010 Climatological Normal

-





Appendix 5.1

Monitoring Schedules for Reporting Month and Next Month



#### Contract No. SPW 25/2018 Environmental Team for Relocation of Sha Tin Sewage Treatment Works to Caverns –Site Preparation and Access Tunnel Construction Tentative Impact Air Quality and Noise Monitoring Schedule

June 2020									
Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday			
31-May	1-Jun	2-Jun	3-Jun	4-Jun	5-Jun	6-Jun			
					AQM (AM1, AM2, AM4, AM5)				
					NM (CM1, CM3, CM4, CM5)				
7-Jun	8-Jun	9-Jun	10-Jun	11-Jun	12-Jun	13-Jun			
				aqm (am1, am2, am4, am5)					
				NM (CM1, CM3, CM4, CM5)					
14-Jun	15-Jun	16-Jun	17-Jun	18-Jun	19-Jun	20-Jun			
			AQM (AM1, AM2, AM4, AM5)						
			NM (CM1, CM3, CM4, CM5)						
21-Jun	22-Jun	23-Jun	24-Jun	25-Jun	26-Jun	27-Jun			
		AQM (AM1, AM2, AM4, AM5)							
		NM (CM1, CM3, CM4, CM5)							
	29-Jun	30-Jun	1-Jul	2-Jul	3-Jul	4-Jul			
	AQM (AM1, AM2, AM4, AM5)			2 00	5 001	AQM (AM1, AM2, AM4, AM5)			
	NM (CM1, CM3, CM4, CM5)								

Remark:

1. AQM: Air Quality Monitoring

NM: Noise Monitoring, the monitoring dates are tentative and are subject to change

am
----

#### Contract No. SPW 25/2018 Environmental Team for Relocation of Sha Tin Sewage Treatment Works to Caverns –Site Preparation and Access Tunnel Construction Tentative Impact Air Quality and Noise Monitoring Schedule

	July 2020						
Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday	
28-Jun	29-Jun AQM (AM1, AM2, AM4, AM5) NM (CM1, CM3, CM4, CM5)	30-Jun	1-Jul	2-Jul	3-Jul	4-Jul AQM (AM1, AM2, AM4, AM5)	
5-Jul	6-Jul	7-Jul	8-Jul	9-Jul	10-Jul AQM (AM1, AM2, AM4, AM5) NM (CM1, CM3, CM4, CM5)	11-Jul	
12-Jul	13-Jul	14-Jul	15-Jul	16-Jul AQM (AM1, AM2, AM4, AM5) NM (CM1, CM3, CM4, CM5)	17-Jul	18-Jul	
19-Jul	20-Jul	21-Jul	22-Jul AQM (AM1, AM2, AM4, AM5) NM (CM1, CM3, CM4, CM5)	23-Jul	24-Jul	25-Jul	
26-Jul	27-Jul	28-Jul AQM (AM1, AM2, AM4, AM5) NM (CM1, CM3, CM4, CM5)	29-Jul	30-Jul	31-Jul	1-Aug	

Remark:

1. AQM: Air Quality Monitoring

NM: Noise Monitoring, the monitoring dates are tentative and are subject to change



Appendix 5.2

Air Quality Monitoring Results and Graphical Presentations

# Report on 1-hour TSP monitoring at AM1 - Ah Kung Kok Fishermen Village

Action Level (µg/m3) -	294
Limit Level (µg/m3) -	500

Date	Weather Condition	Time	Mass Concentration (µg/m3)
5-Jun-20	Fine	08:33	22
5-Jun-20	Fine	09:34	24
5-Jun-20	Fine	10:35	18
11-Jun-20	Fine	09:26	8
11-Jun-20	Fine	10:27	6
11-Jun-20	Fine	13:02	14
17-Jun-20	Fine	08:56	39
17-Jun-20	Fine	09:57	22
17-Jun-20	Fine	10:58	22
23-Jun-20	Fine	08:32	11
23-Jun-20	Fine	09:34	20
23-Jun-20	Fine	10:35	23
29-Jun-20	Fine	09:50	18
29-Jun-20	Fine	10:51	14
29-Jun-20	Fine	13:00	14

# Report on 1-hour TSP monitoring at AM2 - Block H, Kam Tai Court

Action Level (µg/m3) -	325
Limit Level (µg/m3) -	500

Date	Weather Condition	Time	Mass Concentration (µg/m3)
5-Jun-20	Fine	08:22	53
5-Jun-20	Fine	08:23	38
5-Jun-20	Fine	8:24	40
11-Jun-20	Fine	09:04	28
11-Jun-20	Fine	10:05	23
11-Jun-20	Fine	13:02	9
17-Jun-20	Fine	10:01	39
17-Jun-20	Fine	13:00	18
17-Jun-20	Fine	14:01	16
23-Jun-20	Fine	09:03	27
23-Jun-20	Fine	10:04	23
23-Jun-20	Fine	13:00	18
29-Jun-20	Fine	09:47	18
29-Jun-20	Fine	10:48	13
29-Jun-20	Fine	13:00	17

# Report on 1-hour TSP monitoring at AM4 - Wellborn Kindergarten

Action Level (µg/m3) -	297
Limit Level (µg/m3) -	500

Date	Weather Condition	Time	Mass Concentration (µg/m3)
5-Jun-20	Fine	08:44	65
5-Jun-20	Fine	09:45	67
5-Jun-20	Fine	10:46	50
11-Jun-20	Fine	09:12	20
11-Jun-20	Fine	10:13	16
11-Jun-20	Fine	13:02	13
17-Jun-20	Fine	09:04	23
17-Jun-20	Fine	10:05	15
17-Jun-20	Fine	13:00	18
23-Jun-20	Fine	08:22	17
23-Jun-20	Fine	09:23	9
23-Jun-20	Fine	10:24	12
29-Jun-20	Fine	09:48	18
29-Jun-20	Fine	10:49	16
29-Jun-20	Fine	13:00	13

# Report on 1-hour TSP monitoring at AM5 - The NAAC Harmony Manor

Action Level (µg/m3) -	349
Limit Level (µg/m3) -	500


Date	Weather Condition	Time	Mass Concentration (µg/m3)
5-Jun-20	Fine	08:25	11
5-Jun-20	Fine	09:26	8
5-Jun-20	Fine	10:27	8
11-Jun-20	Fine	09:59	36
11-Jun-20	Fine	11:00	14
11-Jun-20	Fine	13:02	8
17-Jun-20	Fine	09:35	25
17-Jun-20	Fine	10:36	20
17-Jun-20	Fine	13:00	25
23-Jun-20	Fine	08:58	45
23-Jun-20	Fine	09:59	34
23-Jun-20	Fine	11:00	28
29-Jun-20	Fine	10:58	18
29-Jun-20	Fine	13:00	16
29-Jun-20	Fine	14:02	15




Environmental Team for Relocation of Sha Tin Sewage Treatment Works to Caverns -

Site Preparation and Access Tunnel Construction

#### **Graphic Presentation of TSP Result**

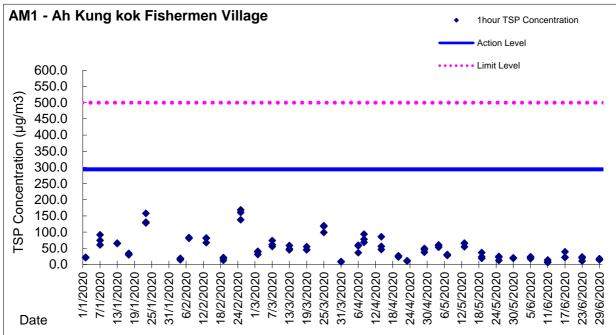

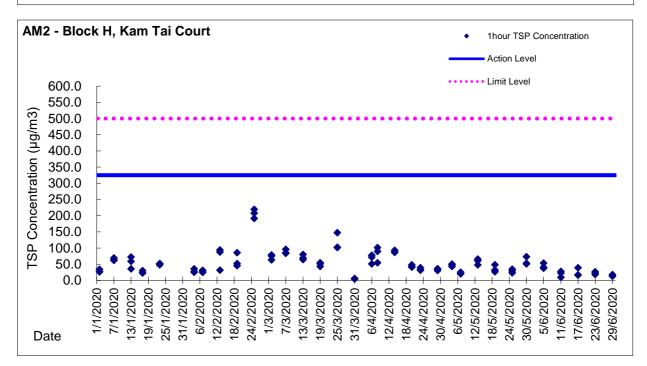





Environmental Team for Relocation of Sha Tin Sewage Treatment Works to Caverns -

Site Preparation and Access Tunnel Construction

#### **Graphic Presentation of TSP Result**

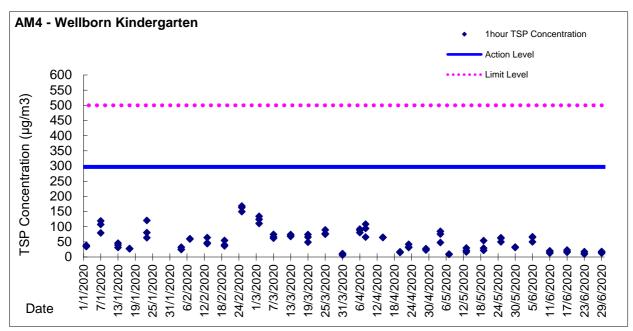

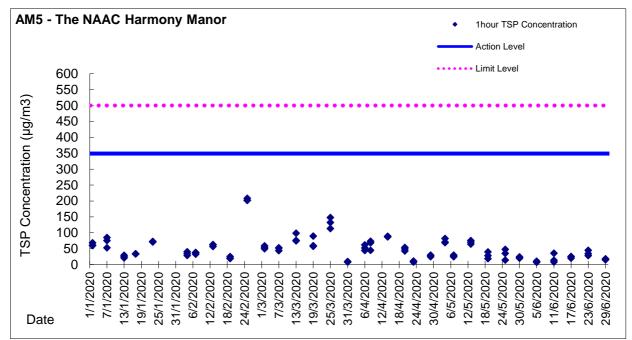



Appendix 5.3

Noise Quality Monitoring Results and Graphical Presentations



# **Noise Monitoring Result**

# Day Time (0700 - 1900hrs on weekday)

Location: CM1 - G/F, Wellborn Kindergarten

				Measure	ement Noi:	se Level	Limit Level
Date	Time	Weather	Wind Speed	Leq	L10	L90	Leq
			(m/s)		Unit	:: dB(A), (3	80min)
02/06/2020	16:00	Cloudy	0.0	56.9	59.6	52.6	70
11/06/2020	15:10	Fine	0.0	58.6	62.1	51.6	70
17/06/2020	10:10	Fine	0.0	59.9	64.0	51.1	70
23/06/2020	10:55	Fine	0.0	58.2	60.7	53.7	70
29/06/2020	15:35	Fine	0.0	59.1	63.6	52.4	70

\* Limit level of noise monitoring station CM1 was adjusted to 65dB(A) during examination period.

Location: C	M3 - R/F, S.K.H. Ma On Shan Holy Sp	pirit Primary School
-------------	-------------------------------------	----------------------

		Weather		Measure	ement Nois	Limit Level		
Date	Time		Wind Speed	Leq	Leq L10 L90		Leq	
			(m/s)	Unit: dB(A), (30min)				
02/06/2020	14:45	Cloudy	0.0	63.7	67.4	58.6	70	
12/06/2020	10:15	Fine	0.0	64.9	66.8	62.7	70	
17/06/2020	10:55	Fine	0.4	66.3	68.2	63.6	70	
23/06/2020	09:40	Fine	0.0	65.3	68.0	62.8	70	
29/06/2020	14:30	Fine	0.0	65.1	68.1	63.2	70	

\* Limit level of noise monitoring station CM3 was adjusted to 65dB(A) during examination period.

Location: CM4 - G/F, Ah Kung Kok Fishermen Village

		Weather		Measure	ement Nois	Limit Level	
Date	Time		Wind Speed	Leq	L10	L90	Leq
			(m/s)		Unit	:: dB(A), (3	30min)
02/06/2020	17:00	Cloudy	0.0	64.6	66.0	61.2	75
12/06/2020	17:00	Fine	0.0	61.7	63.8	48.7	75
16/06/2020	17:15	Fine 0.0		62.0	66.1	50.6	75
26/06/2020	17:00	Fine	0.0	59.0	61.0	55.5	75
29/06/2020	17:00	Fine	0.0	60.9	63.0	58.3	75

Location: CM5 - R/F, The Neighbourhood Advice-Action Council Harmony Manor

				Measurement Noise Level			Limit Level	
Date	Time	Weather	Wind Speed	Leq L10 L90			Leq	
			(m/s)		Unit	30min)		
05/06/2020	15:20	Fine	0.7	63.2	64.8	55.0	75	
11/06/2020	10:00	Fine	0.0	59.5	61.3	55.5	75	
17/06/2020	9:30	Fine	0.0	63.6	66.0	58.5	75	
23/06/2020	15:50	Fine	0.0	68.0	71.2	58.8	75	
29/06/2020	10:55	Fine	0.0	60.7	63.0	56.9	75	


\* Free field correction (Additional 3dB(A)) was made on CM1&CM4 measurement result



# Service Contract No. SPW 25/2018 Environmental Team for Relocation of Sha Tin Sewage Treatment Works to Caverns –


Site Preparation and Access Tunnel Construction

Graphic Presentation of Noise Monitoring Result

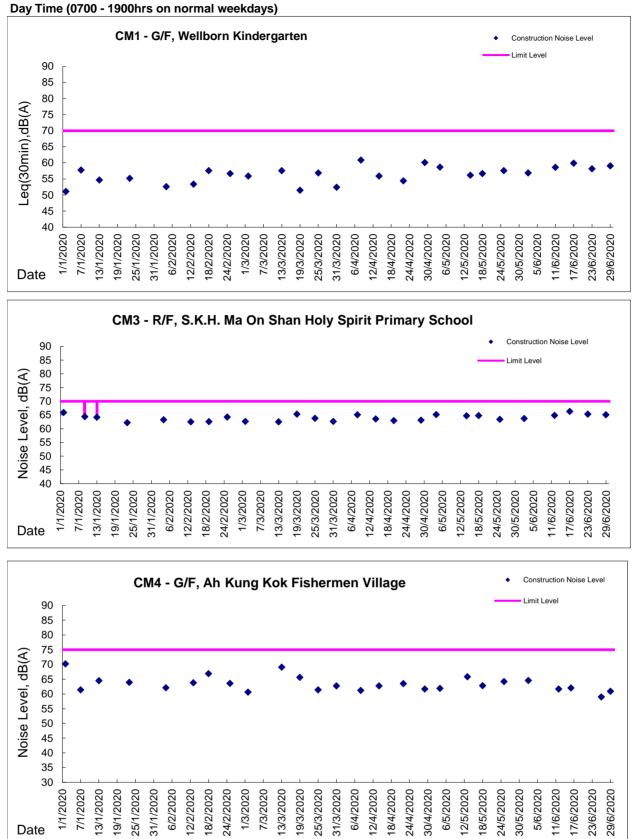



# Graphic Presentation of Noise Monitoring Result Day Time (0700 - 1900hrs on normal weekdays)

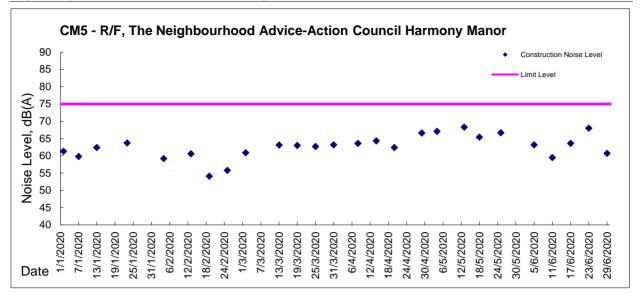

Service Contract No. SPW 25/2018 Environmental Team for Relocation of Sha Tin Sewage Treatment Works to Caverns – Site Preparation and Access Tunnel Construction

# Noise Monitoring Result

am

# <u> Evening Time (1900 - 2300hrs)</u>


# Location: CM4 - G/F, Ah Kung Kok Fishermen Village

Date Weather	Sound Level	Calibrator	Calibration Check (Before)	Calibration Check (After)	Time	Measurement Noise Level		Mean Noise Level	Baseline Level Range (mean level)	Construction Noise Level (baseline correction) Major Con	Major Construction			
	Meter					Leq	L10	L90	Leq (5min)	Leq	Leq	Noise Source(s)	Other Noise Source(s)	
						dB(A), (5-min)			Unit: d	IB(A), (5-min)				
	2/6/2020 Cloudy NTi XL2				93.8	20:00	63.1	65.0	60.5					
			CAL200	93.8		20:05	62.4	63.9	60.4					
2/6/2020		NTi XI 2				20:10	62.5	64.2	60.6	63	53.5-70.9 (mean 56.7) 61	nil	Traffic	
2/0/2020			OALZOU			20:15	62.3	63.6	60.7					
						20:20	63.2	65.7	60.6					
						20:25	62.8	65.3	60.1					[]
					93.8	20:35	60.6	63.0	56.3		53.5-70.9 (mean 56.7) 58			
				93.8		20:40	60.1	62.9	54.0	_				
12/6/2020	Cloudy	NTi XL2	CAL200			20:45	60.5	63.4	53.4	60		nil	Traffic	
, _,						20:50	59.9	62.5	54.1					
						20:55	60.6	63.1	54.6					
						21:00	60.7	62.8	54.5					ļļ
			CAL200	) 93.8	93.8	19:15	63.0	68.5	60.4	62	53.5-70.9 (mean 56.7) 60	nil	Traffic	
						19:20	61.8	65.9	59.8					
16/6/2020	Cloudy	NTi XL2				19:25	62.2	66.1	58.2					
						19:30	61.2	65.1	58.8					
						19:35	62.1	69.9	59.7					
						19:40	61.5	66.2	58.6					
		NTi XL2				19:35	59.2	61.3	55.8	-	53.5-70.9 (mean 56.7) 54			
			2 CAL200			19:40	58.9	61.1	54.7			nil	Traffic	
26/6/2020	Fine			93.8	93.8	19:45	58.8	60.9	54.2	- 59				
						19:50	58.4	60.6	55.3	-				
						19:55	58.2	60.3	54.6	-				
						20:00	58.9	61.1	55.4					
						19:55	58.7	60.3	56.4	4				
						20:00	58.1	59.8	55.6					
29/6/2020 Fine	NTi XL2	2 CAL200	.200 93.8	93.8	20:05	58.1	59.7	56.0	- 58	53.5-70.9 (mean 56.7) 53	nil	Traffic		
					20:10	58.0	59.6	55.9			-			
					20:15	57.9	59.9	55.3	4		ļ			
					20:20	57.8	59.6	55.0						



Environmental Team for Relocation of Sha Tin Sewage Treatment Works to Caverns -

Site Preparation and Access Tunnel Construction

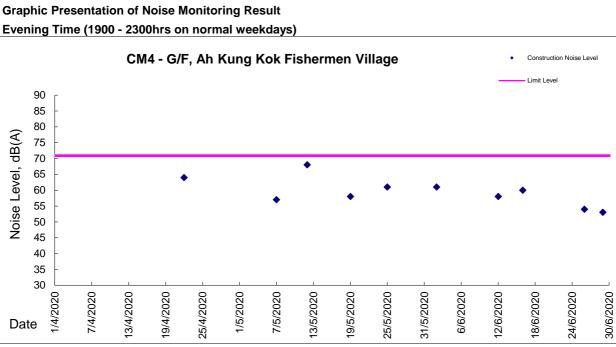



Appendix 5.4

Monthly Summary Waste Flow Table

## Name of Department: <u>Drainage Services Department</u>

# Monthly Summary Waste Flow Table for <u>June 2020</u> [to be submitted not later than the 15<sup>th</sup> day of each month following reporting month]

(7 III quali	intes shan be found	ied off to 5 decima	i places.)							
	Ac	tual Quantities of I	nert C&D Materia	ls Generated Mont	thly		Actual Quantities	of C&D Wastes C	Generated Monthly	
	(a)=(b)+(c)+(d)+(e)	(b)	(c)	(d)	(e)	(f)	(g)	(h)	(i)	(j)
Month	Total Quantity	Broken Concrete	Reused in the	Reused in other	Disposed as	Metals	Paper/cardboard	Plastics		Others, e.g. general
	Generated	(see Note 3)	Contract	Projects	Public Fill		packaging	(see Note 2)	Chemical Waste	refuse disposed at
										Landfill
	(in '000m <sup>3</sup> )	(in '000kg)	(in '000kg)	(in '000kg)	(in L)	(in tonne)				
Jan-20	0.000	0.000	0.063	5.297	0.011	0.000	0.000	0.000	0.0	19.72
Feb-20	14.478	0.038	0.000	14.049	0.391	0.000	0.000	0.000	320	78.23
Mar-20	11.909	0.000	0.000	11.230	0.679	0.000	0.106	0.000	0.0	51.82
Apr-20	4.423	0.000	0.126	3.899	0.398	0.000	0.000	0.000	0.0	26.01
May-20	6.862	0.000	0.000	6.087	0.775	0.006	0.072	0.000	0.0	13.66
Jun-20	11.587	0.013	0.135	10.367	1.072	0.000	0.000	0.000	0.000	79.87
Sub-total	49.259	0.051	0.324	50.929	3.326	0.006	0.178	0.000	320.000	269.31
Total	49.259	0.051	0.324	50.929	3.326	0.006	0.178	0.000	320.000	269.31

(All quantities shall be rounded off to 3 decimal places.)

Notes:

(1) The waste flow table shall also include C&D materials that are specified in the Contract to be imported for use at the Site.

(2) Plastics refer to plastics bottles/containers, plastic sheets/foam from packaging material.

(3) Broken concrete for recycling into aggregates.

(4) If necessary, use the conversion factor: 1 full load of 24T, 30T & 38T dumping truck is equivalent to  $5 \text{ m}^3$ ,  $7\text{m}^3$ , &  $10.5\text{m}^3$  by volume respectiverly.

(5) Conversion factors for reporting purpose:

Excavated:  $rock = 2.0 tonnes/m^3$ ,  $soil = 1.8 tonnes/m^3$ , broken concrete and bitumen = 2.4 tonnes/m<sup>3</sup>, Slurry = 2.8 tonnes/m<sup>3</sup>



Appendix 7.1

**Event Action Plans** 



#### Event and Action Plan for Construction Air Quality

EVENT		ACTION		
EVENI	ET	IEC	ER	CONTRACTOR
ACTION LEVEL				
1. Action level being exceedance by one sampling	<ol> <li>Identify source, investigate the causes of exceedance and propose remedial measures;</li> <li>Inform Contractor, IEC and ER;</li> <li>Repeat measurement to confirm finding; and</li> <li>Increase monitoring frequency to daily.</li> </ol>	<ol> <li>Check monitoring data submitted by ET;</li> <li>Check Contractor's working method; and</li> <li>Review and advise the ET and ER on the effectiveness of the proposed remedial measures.</li> </ol>	1. Notify Contractor.	<ol> <li>Identify source(s), investigate the causes of exceedance and propose remedial measures;</li> <li>Implement remedial measures; and</li> <li>Amend working methods agreed with the ER as appropriate</li> </ol>
2. Action level being exceeded by two or more consecutive sampling	<ol> <li>Identify source;</li> <li>Inform Contractor, IEC and ER;</li> <li>Advise the Contractor and ER on the effectiveness of the proposed remedial measures;</li> <li>Repeat measurements to confirm findings;</li> <li>Increase monitoring frequency to daily;</li> <li>Discuss with IEC and Contractor on remedial actions required;</li> <li>If exceedance continues, arrange meeting with Contractor, IEC and ER;</li> <li>If exceedance stops, cease additional monitoring.</li> </ol>	<ol> <li>Check monitoring data submitted by ET;</li> <li>Check Contractor's working method;</li> <li>Discuss with ET, ER and Contractor on possible remedial measures;</li> <li>Advise the ET and ER on the effectiveness of the proposed remedial measures; and</li> <li>Supervise Implementation of remedial measures.</li> </ol>	<ol> <li>Confirm receipt of notification of exceedance in writing;</li> <li>Notify Contractor;</li> <li>Ensure remedial measures properly implemented.</li> <li>If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated.</li> </ol>	<ol> <li>Identify source and investigate the causes of exceedance;</li> <li>Submit proposals for remedial measures to the ER with a copy to ET and IEC within three working days of notification;</li> <li>Implement the agreed proposals; and</li> <li>Amend proposal as appropriate.</li> </ol>



## Event and Action Plan for Construction Air Quality (Con't)

EVENT			ACTION									
EVENI	ET	•	IEC	ER	CO	NTRACTOR						
LIMIT LEVEL												
1. Limit level exceedance by one sampling	1. 2. 3. 4. 5.	Identify source, investigate the causes of exceedance and propose remedial measures; Inform Contractor, IEC, ER, and EPD; Repeat measurement to confirm finding; Increase monitoring frequency to daily; and Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results.	<ol> <li>Check monitoring data s by ET;</li> <li>Discuss amongst ER, E Contractor on the potent remedial actions;</li> <li>Review Contractor's rem actions whenever neces assure their effectivenes advise the ER according</li> <li>Supervise implementation remedial measures.</li> </ol>	c, and 2. Notify Contractor; al 3. Ensure remedial mean properly implemente edial sary to s and by; and	ting; asures 2.	Identify source(s) and investigate the causes of exceedance; Take immediate action to avoid further exceedance; Submit proposals for remedial measures to ER with a copy to ET and IEC within three working days of notification; Implement the agreed proposals; and Amend proposal if appropriate.						
2. Limit level exceedance by two or more consecutive sampling	1. 2. 3. 4. 5. 6. 7. 8.	Notify IEC, ER, Contractor and EPD; Identify source; Repeat measurement to confirm findings; Increase monitoring frequency to daily; Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented; Arrange meeting with IEC and ER to discuss the remedial actions to be taken; Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results; and If exceedance stops, cease additional monitoring.	<ol> <li>Check monitoring data s by the ET;</li> <li>Discuss amongst ER, E Contractor on the potent remedial actions;</li> <li>Review Contractor's rer actions whenever neces assure their effectivenes advise the ER according</li> <li>Supervise the implement remedial measures.</li> </ol>	of exceedance in wri, and2.alIn consultation with taland IEC, agree withContractor on the rernedialmeasures to be implesary to3.s andof remedial measurey;4.	ting; he ET the 2. nedial emented; 3. nentation s; and ues, n of the und 4. or to stop until the 5.	Identify source(s) and investigate the causes of exceedance; Take immediate action to avoid further exceedance; Submit proposals for remedial measures to the ER with a copy to the IEC and ET within three working days of notification; Implement the agreed proposals; Revise and resubmit proposals if problem still not under control; and Stop the relevant portion of works as determined by the ER until the exceedance is						



#### **Event and Action Plan for Construction Noise**

EVENT	ACTION													
	ET	IEC	ER	CONTRACTOR										
Action Level	<ol> <li>Notify IEC and Contractor;</li> <li>Carry out investigation;</li> <li>Report the results of investigation to the IEC, ER and Contractor;</li> <li>Discuss with the Contractor and formulate remedial measures; and</li> <li>Increase monitoring frequency to check mitigation effectiveness.</li> </ol>	<ol> <li>Review the analysed results submitted by the ET;</li> <li>Review the proposed remedial measures by the Contractor and advise the ER accordingly; and</li> <li>Supervise the implementation of remedial measures</li> </ol>	<ol> <li>Confirm receipt of notification of failure in writing;</li> <li>Notify Contractor;</li> <li>Require Contractor to propose remedial measures for the analyzed noise problem; and</li> <li>Ensure remedial measures are properly implemented.</li> </ol>	<ol> <li>Submit noise mitigation proposals to IEC; and</li> <li>Implement noise mitigation proposals.</li> </ol>										
Limit Level	<ol> <li>Identify source;</li> <li>Inform IEC, ER, EPD and Contractor;</li> <li>Repeat measurements to confirm findings;</li> <li>Increase monitoring frequency;</li> <li>Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented;</li> <li>Inform IEC, ER and EPD the causes and actions taken for the exceedances;</li> <li>Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results;</li> <li>If exceedance stops, cease additional monitoring.</li> </ol>	<ol> <li>Discuss amongst ER, ET, and Contractor on the potential remedial actions;</li> <li>Review Contractor's remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly; and</li> <li>Supervise the implementation of remedial measures.</li> </ol>	<ol> <li>Confirm receipt of notification of failure in writing;</li> <li>Notify Contractor;</li> <li>Require Contractor to propose remedial measures for the analysed noise problem;</li> <li>Ensure remedial measures properly implemented; and</li> <li>If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated.</li> </ol>	<ol> <li>Take immediate action to avoid further exceedance;</li> <li>Submit proposals for remedial actions to IEC and ER within 3 working days of notification;</li> <li>Implement the agreed proposals;</li> <li>Resubmit proposal if problem still not under control; and</li> <li>Stop the relevant portion of works as determined by the ER until the exceedance is abated.</li> </ol>										



### Appendix 7.2

Summary for Notification of Exceedance



Ref no.	Date	Location	Parameters (Unit)	Measured	Action Level	Limit Level	Follow-up action
-	-	-	-	-	-	-	-



Appendix 9.1

**Complaint Log** 



# Environmental Complaints Log


Complaint Log No.	Date of Complaint	Received From and Received By	Location of Complainant	Nature of Complaint	Outcome	Status
					A public complaint regarding construction dust received by DSD on 29 July 2019 was subsequently referred to ET on 6 August 2019. The complainant reported that exposed slope surface without any covering at Portion 6. Based on the information provided by the Contractor, the concerned area was under slope cutting and filling works for temporary haul road construction.	
					Based on the observation on 6 August 2019 and weekly site inspection on 7 August 2019, the concerned slope was observed covered with the tarpaulin sheets to alleviate the potential dust impact to the surroundings.	Interim investigatio
190808	29 July 2019	DSD	Construction site area Portion 6	Exposed slope surface without any covering was observed at Portion 6	Upon review on the monitoring data, no exceedances were recorded at the air quality monitoring stations AM2 - Block H, Kam Tai Court and AM4 - Wellborn Kindergarten (located nearest to the concerned slope) during the 1hr TSP monitoring on 23 July 2019 and 29 July 2019 respectively.	n report was issue on 16 August 2019
					Follow up site inspection was conducted by the Environmental Team on 07 August 2019 and it was observed that the slope at Portion 6 was properly covered.	
					Nevertheless, in view of the public concern, the Contractor of DC/2018/05 was reminded to enhance the dust suppression measure by providing adequate watering to any exposed surface during cutting slope and fill works to avoid potential dust impact to the surroundings.	




Appendix 10.1

**Construction Programme of Individual Contracts** 

ID	Activity Name	Original	Start	Finish	Total Float	Late Start	Late Finish				
		Duration						May		Jun	202 Jul
elocation o	f Sha Tin Sewage Treatment Works to Caverns - S	ite Prepa	aration & A	ccess Tunne	el						
Contract Pa			<u></u>	<u></u>	<u></u>	<u></u>					
Key Dates											
Key Dates											
KD01	KD1(455d) - Completion of Construction of Steel Bridges and Construction Accesses	0		30-Jun-20*	-33		28-May-20			 30-Jun-20*	KD1(455d) - Completic
KD02	connecting Portions 2,3,4& 6 KD2 (424d)-Completion of Construction of Community Liaison Centre	0		08-Jul-20*	-70		29-Apr-20				ul-20* 🔶 KD2 (424d)-
							207.0120				
Preliminary Preliminary Wo											
Preliminary V											
A11980	Preservation and Protection of Existing Tiees	836	28-Feb-19 A	28-Dec-21	0	28-Dec-21	28-Dec-21				
A12340	Establishment Works to landscape softworks (Section 7)	719	23-Jul-19A	28-Dec-21	0	23-Jul-19	28-Dec-21				
			20 001 1071	20 00021		20 001 10	20 200 21				
	d to Main Portal Area										
Steel Bridge	of Ote al Deideo										
A10293	of Steel Bridge Abutment (North Ramp)	25	02-May-20 A	17-Jun-20	1036	13-Dec-23	22-Dec-23				
A10306	Concreting slab for North Ramp	6	12-Jun-20	18-Jun-20	1036	18-Dec-23	23-Dec-23		!		
A10308	Barrier	12	08-Jun-20 A	22-Jun-20	-27	07-May-20	21-May-20				
Main Span				40.400		00.14 00	0014 00				
A10390	Concreting slab for Main Span	6	08-Jun-20	13-Jun-20	-14	22-May-20	28-May-20				
A10392	Landscape	6	23-Jun-20	30-Jun-20	-27	22-May-20	28-May-20				<b>.</b>
A10450	Steel Bridge Complete	0		30-Jun-20	-27		28-May-20			30-Jun-20	Steel Bridge Comple
Noise Barrier											
NB1									, , ,		
A10800	NB post installation - NB1 (0-75m)	13	08-Jun-20	22-Jun-20	430	19-Nov-21	03-Dec-21				
A10810	NB panel installation - NB1 (0-75m)	13	23-Jun-20	09-Jul-20	430	04-Dec-21	18-Dec-21				
A10850	NB post installation - NB1 (75-150m)	13	23-Jun-20	09-Jul-20	430	04-Dec-21	18-Dec-21				- ;
A10860	NB panel installation - NB1 (75-150m)	7	10-Jul-20	17-Jul-20	430	20-Dec-21	29-Dec-21				
NB2											
A10910	NB frame installation - NB2 (0-63m)	13	08-Jun-20	22-Jun-20	443	04-Dec-21	18-Dec-21				
A10920	NB panel installation - NB2 (0-63m)	7	23-Jun-20	02-Jul-20	443	20-Dec-21	29-Dec-21				
NB3											
A10940	Excavation - NB3 (0-25m)	6	10-Jul-20	17-Jul-20	386	30-Oct-21	05-Nov-21				
A10950	Footing & wall structure - NB3 (0-25m)	25	17-Jul-20	15-Aug-20	386	06-Nov-21	04-Dec-21				
A10960	Backfill - NB3 (0-25m)	7	15-Aug-20	24-Aug-20	386	06-Dec-21	13-Dec-21				
											- -
A10970	NB post installation - NB3 (0-25m)	6	24-Aug-20	31-Aug-20	386	14-Dec-21	20-Dec-21				
A10980	NB panel installation - NB3 (0-25m)	6	31-Aug-20	07-Sep-20	386	21-Dec-21	29-Dec-21				
Existing Nois			100 C								
A11000	Demolish existing noise barrier along NB 1	10	07-Sep-20	18-Sep-20	386	30-Dec-21	11-Jan-22				
CE090 & 099	- Decontamination Works of Groundwater and Soil										
General											
Remaining Le	evel of Effort Project ID: MP005 (2006)					Contract	: No. DC/20	18/05			
Actual Level of				Relocatio				ent Works to	Cav	arne -	
Actual Work	Data Date: 08-Jun-20										
Remaining W				Site				nnel Constru	ctior	I	
Critical Rema	ining Work Primavera Systems, Inc.				3	Month R	olling Prog	iramme			

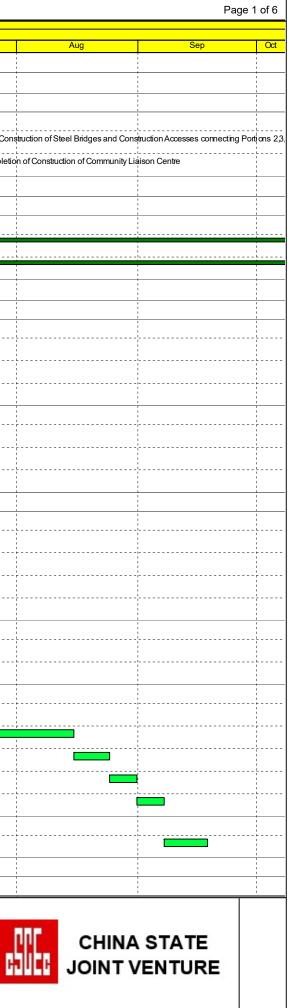


	Sewage Treatment Works to Caverns (8-Jun-20)	Original	Start	Finish		onth Rolling Pro	Late Finish				
		Duration						May		Jun	Jul
A11190	Laboratory Testing for Confirmatory Sample	10	28-May-20 A	12-Jun-20	340	03-Aug-21	07-Aug-21				
Groundwater Re	emediation								1		     
A11200	Install Groundwater Treatment Facility	21	13-Jun-20	09-Jul-20	405	27-Oct-21	19-Nov-21				· · · · · · · · · · · · · · · · · · ·
A11870	Carry out Groundwater Treatment Work with Laboratory Testing	30	10-Jul-20	13-Aug-20	405	20-Nov-21	24-Dec-21				
A11880	Laboratory Testing (Confirmatory Sample at S1)	10	14-Aug-20	25-Aug-20	405	28-Dec-21	08-Jan-22				i 
A11890	Decommissioning Goundwater Treatment Facility	5	26-Aug-20	31-Aug-20	405	10-Jan-22	14-Jan-22				
Soil Domodiation	n for Lead (Cement Solidification)										 
A12060	Carry out Ti al Mxing for Cement Solidification	10	13-Jun-20	24-Jun-20	975	07-Oct-23	18-Oct-23				
A12065	ELS Works	12	26-Jun-20	10-Jul-20	975	19-Oct-23	02-Nov-23				
A12070	Install Cement Solidification Treatment Facility	14	11-Jul-20	27-Jul-20	975	03-Nov-23	18-Nov-23				
A12080	Carry out Cement Solidification Work	14	28-Jul-20	12-Aug-20	975	20-Nov-23	05-Dec-23				
	-			-							
A12090	Laboratory Testing (TCLP & UCS Test)	12	13-Aug-20	26-Aug-20	975	06-Dec-23	19-Dec-23				
A12100	Removal of Tre aled Soi	2	27-Aug-20	28-Aug-20	975	20-Dec-23	21-Dec-23				     
A12110	Decommissioning Cement Solidification Facility	2	29-Aug-20	31-Aug-20	975	22-Dec-23	23-Dec-23				     
	n for Tetrachloroethene (Biopile Method)										   
A12120	Supply & Establish of Biopile Treatment Facility	17	13-Jun-20	04-Jul-20	340	09-Aug-21	27-Aug-21				
A12130	Setup of Biopile	20	06-Jul-20	28-Jul-20	340	28-Aug-21	20-Sep-21				
A12140	Operation of Biopile Work (Subject to Monitoring Result)	90	29-Jul-20	13-Nov-20	340	21-Sep-21	10-Jan-22				· · · · · · · · · · · · · · · · · · ·
Water Mains Diver	sion										
DN600 Water Ma	ain										
A10600	Laying DN600 (CHA 0-80 2)	39	08-May-20 A	10-Jul-20	171	02-Jan-21	02-Feb-21				
Drainage Works											
Mui Tsz Lam Roa											
A10765	Drainage work from SMH1006 to 1008 (3mh ~3m depth)	75	31-Jul-20	29-Oct-20	5	06-Aug-20	04-Nov-20				
A10995	Drainage work from SMH2010 to 2011 (2mh ~6 to 7.5m depth)	90	08-Jun-20	22-Sep-20	49	06-Aug-20	21-Nov-20				1
A13141	Drainage work from SMH1010 (3mh ~6.5 to 7.5m depth)	50	01-Jun-20 A	30-Jul-20	5	13-Jun-20	05-Aug-20				1
A13230	Jacking pit in portion 6 for 1350 dia pipe jacking	64	30-Mar-20 A	27-Jun-20	52	10-Aug-20	28-Aug-20		!		
A13250	Pipe Jacking for 1350 dia drainage (60m)	80	29-Jun-20	30-Sep-20	52	29-Aug-20	03-Dec-20			[ [	
CE073 - Modify E>	kisting Stormwater Drainage for Connection in Portion 4								     		   
CE073 - Modify I	Existing Stormwater Drainage for Connection in Portion 4								1		     
A13335	Construct additional manhole SMH1021	48	30-Mar-20 A	18-Jun-20	239	30-Mar-21	13-Apr-21				     
A13390	Modifiy existing manhole SMH4051403	30	08-Jun-20	14-Jul-20	213	27-Feb-21	06-Apr-21				· · · · · · · · · · · · · · · · · · ·
A13400	connect new 1350 pipe to modified existing manhole	6	15-Jul-20	21-Jul-20	213	07-Apr-21	13-Apr-21				
A13410	Backfilling	30	22-Jul-20	25-Aug-20	213	14-Apr-21	20-May-21				     
Road Works											1 1 1
	r Ma On Shan Rail										     
A11940	Haul Road Construction	109	10-Feb-20 A	24-Jun-20	-23	12-May-20	28-May-20		;		· · · · · · · · · · · · · · · · · · ·
<b>Construction Ac</b>	cess connecting Ma On Shan Road										     
A13340	Construction Access Connecting Ma On Shan Road construction at Portion 4	30	30-Jun-20*	04-Aug-20	405	11-Nov-21	15-Dec-21				· L · · · · · · · · · · · · · · · · · ·
A13420	Construction Access Connecting Ma On Shan Road construction at Portion 2	30	05-Aug-20	08-Sep-20	405	16-Dec-21	22-Jan-22				
Construction Ac	cess connecting Tunnel Acces to Steel Bridge										
A13870	Construction Access Connecting Tunnel Access to Steel Bridge	20	11-May-20 A	30-Jun-20	-27	07-May-20	28-May-20				 
Main Portal Are											
Site Formation for											
Slope SMP 2											1

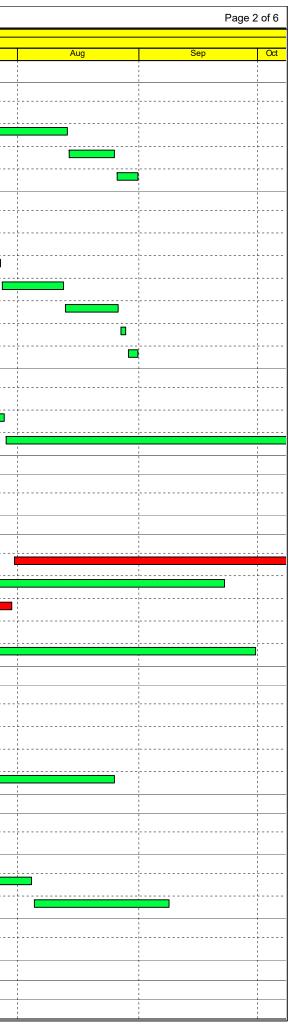

	a Sewage Treatment Works to Caverns (8-Jun-20)	Original	Start	Finish	Total Float	onth Rolling Pr	ogramme							Page
	Proving Induite	Original Duration	Start	THIST	IOLAI FIOAL			May		Jun	2020 Jul	Aug	Sep	
13080	Catpatch (1nos) & U-channel at +15.5mpd (SMP2)	18	08-Jun-20	29-Jun-20	339	02-Aug-21	21-Aug-21	iviery						
13090	Catpatch (1nos) & U-channel at +8mpd (SMP2)	18	30-Jun-20	21-Jul-20	339	23-Aug-21	11-Sep-21							
taining Wallfo	nr Main Portal													
etaining Walle											1 1 1	   	   	
13260	Temp access road formation	12	02-Jul-20*	15-Jul-20	46	25-Aug-20	07-Sep-20							
13270	Erect temp working platform for piling	24	16-Jul-20	12-Aug-20	46	08-Sep-20	07-Oct-20							
13280	Pre-drilling work - RMP2	21	13-Aug-20	05-Sep-20	46	08-Oct-20	02-Nov-20							
13285	Piling (bored-pile, 1.2m, 3nos) - RMP2	33	07-Sep-20	16-Oct-20	46	03-Nov-20	10-Dec-20							
			01 000 20				10 200 20							
<b>etaining vval i</b> 15320	RMP6 - CSD CSD approval period (CSD)	347	01-Jun-19 A	12-Jun-20	1289	19-Dec-23	23-Dec-23							
					1200									
etaining Wall	RMP5 - CSD (Tunnel Portal Area) CSD approval period (CSD)	347	01-Jun-19 A	12-Jun-20	1289	19-Dec-23	23-Dec-23				   			
			0 Pour-13 A	12-0411-20	1203	13-00023	20-20-20							
etaining Wall	CSD approval period (CSD)	358	01-Jun-19 A	23-Jun-20	1278	08-Dec-23	23-Dec-23		   		, , ,		  - 	
		000	0 Four-13 A	20-0411-20	1270	00-00020	20-00020		1					
nnel	adea													
reliminary Wo	Blasting Permit License - review by Mines Department	30	11-Aug-20	14-Sep-20	4	15-Aug-20	18-Sep-20							
12365	Application of CNP	52	16-Jun-20	17-Aug-20	41	05-Aug-20	06-Oct-20							
											i 			
12375	Temp. CLP Transformer Room construction	100	16-Mar-20 A	18-Jul-20	14	24-Jun-20	04-Aug-20							
12385	CLP installation work	52	20-Jul-20	17-Sep-20	14	05-Aug-20	06-Oct-20							
12395	Trench excavation	8	15-Jun-20*	23-Jun-20	69	05-Sep-20	14-Sep-20							
12405	Cable duct installation from CLP room to Tunnel	15	18-Jun-20	07-Jul-20	69	09-Sep-20	25-Sep-20							
12415	Backfill	4	08-Jul-20	11-Jul-20	72	30-Sep-20	06-Oct-20							
oft Ground 40	Om, Tunnel Excavation by Drill and Break								1					
17010	Long Canopy Tube (Ch175 - 179)	2	08-Jun-20	09-Jun-20	65	25-Aug-20	26-Aug-20			•				
17020	Tunnel excavation (Ch175 - 179)	4	10-Jun-20	13-Jun-20	65	27-Aug-20	31-Aug-20							
17030	Steel rib & Shortcrete installation (Ch175 - 179)	4	11-Jun-20	15-Jun-20	65	28-Aug-20	01-Sep-20			-				
17040	Long Canopy Tube (Ch179 - 183)	2	16-Jun-20	17-Jun-20	65	02-Sep-20	03-Sep-20			- <mark></mark>				
17050	Tunnel excavation (Ch179 - 183)	4	18-Jun-20	22-Jun-20	65	04-Sep-20	08-Sep-20			-				
17060	Steel rib & Shortcrete installation (Ch179 - 183)	4	19-Jun-20	23-Jun-20	65	05-Sep-20	09-Sep-20				- - -			
17065	PM instruction/ consent to change softground excavation to Ch193	0	24-Jun-20		65	10-Sep-20					Linstruction/ consent to change soft	tripund excavation to Ch103		
17070		2	24-Jun-20	26 km 20			11 Con 20			▼ <sup>r</sup> ™				
	Long Canopy Tube (Ch183 - 187)			26-Jun-20	65	10-Sep-20	11-Sep-20							
17080	Tunnel excavation (Ch183 - 187)	4	27-Jun-20	02-Jul-20	65	12-Sep-20	16-Sep-20	l						
17090	Steel rib & Shortcrete installation (Ch183 - 187)	4	29-Jun-20	03-Jul-20	65	14-Sep-20	17-Sep-20							
17100	Long Canopy Tube (Ch187 - 191)	2	04-Jul-20	06-Jul-20	65	18-Sep-20	19-Sep-20							
17110	Tunnel excavation (Ch187 - 191)	4	07-Jul-20	10-Jul-20	65	21-Sep-20	24-Sep-20							
17120	Steel rib & Shortcrete installation (Ch187 - 191)	4	08-Jul-20	11-Jul-20	65	22-Sep-20	25-Sep-20							
17130	Long Canopy Tube (Ch191 - 193)	2	13-Jul-20	14-Jul-20	65	26-Sep-20	28-Sep-20							
17140	Tunnel excavation (Ch191 - 193)	4	15-Jul-20	18-Jul-20	65	29-Sep-20	05-Oct-20							
17150	Steel rib & Shortcrete installation (Ch191 - 193)	4	16-Jul-20	20-Jul-20	65	30-Sep-20	06-Oct-20							
ard Rock 28/	Im, Tunnel Excavation by Drill and Blast											- - - - -		
11950	Blast Door construction	59	01-Jun-20 A	10-Aug-20	4	12-Jun-20	14-Aug-20							
												i	1	

	a Tin Sewage Treatment Works to Caverns (8-Jun-20)	Oisin al	Otest	Tin tak	_	onth Rolling P		_						Page 4 of 6
ivity ID	Activity Name	Original Duration	Start	Finish	lotal Floa	at Late Start	Late Finish	May		Jun	2020 Jul	Aug	Sep	Oct
A13450	Soil Nail at 33.6mpd (Rows D & TN2)-25nos	15	08-Jun-20	24-Jun-20	326	17-Jul-21	03-Aug-21			Juli	Jui	Aug		
A13460	Soil Nail at 32.1mpd (Rows C)-25nos	15	26-Jun-20	14-Jul-20	326	04-Aug-21	20-Aug-21							
A13470	Excavation (34.2-31.1mpd)	5	15-Jul-20	20-Jul-20	326	21-Aug-21	26-Aug-21							
A13480	Form temp working platform for soil nail	5	21-Jul-20	25-Jul-20	326	27-Aug-21	01-Sep-21							
A13490	Soil Nail at 30.6mpd (Row B)-24nos	14	27-Jul-20	11-Aug-20	326	02-Sep-21	17-Sep-21							
A13500	Soil Nail at 29.1mpd (Row A & TN1)-26nos	15	12-Aug-20	28-Aug-20	326	18-Sep-21	07-Oct-21							
A13510	Excavation (31.1 - 28.6mpd)	5	29-Aug-20	03-Sep-20	326	08-Oct-21	13-Oct-21							
A13520	Base Slab - RB RMP1	8	04-Sep-20	12-Sep-20	326	15-Oct-21	23-Oct-21							
Rigid Barrie A13620	Form temp working platform for soil nail - BMP2	5	02-Jun-20 A	12-Jun-20	348	12-Aug-21	17-Aug-21							
A13630	Soil Nail at 32.1mpd (Rows H & TN4)-11nos-BMP2	8	13-Jun-20	22-Jun-20	348	18-Aug-21	26-Aug-21							
A13640	Soil Nail at 31.1mpd (Rows G)-12nos - BMP2	8	23-Jun-20	03-Jul-20	348	27-Aug-21	04-Sep-21							
A13650	Excavation (33.1-31mpd)-BMP2	5	04-Jul-20	09-Jul-20	348	06-Sep-21	10-Sep-21							
A13660	Form temp working platform for soil nail - BMP2	5	10-Jul-20	15-Jul-20	348	11-Sep-21	16-Sep-21							·····
A13670	Soil Nail at 30.1mpd (Row F)-11nos - BMP2	8		24-Jul-20	348									
			16-Jul-20			17-Sep-21	27-Sep-21							
A13680	Soil Nail at 29.1mpd (Row E & TN3)-12nos-BMP2	8	25-Jul-20	03-Aug-20	348	28-Sep-21	07-Oct-21				L			
A13690	Excavation (31 - 28.6mpd) - RB BMP2	5	04-Aug-20	08-Aug-20	348	08-Oct-21	13-Oct-21						, , , ,	
A13700	Base Slab - RB BMP2	8	10-Aug-20	18-Aug-20	348	15-Oct-21	23-Oct-21							
A13710	Back wall - RB BMP2	12	19-Aug-20	01-Sep-20	348	25-Oct-21	06-Nov-21		1					
A13720	Impact Wall & Side wall - RB BMP2	20	02-Sep-20	24-Sep-20	348	08-Nov-21	30-Nov-21		1					
Access Roa	ad to Portion 12 - Phase 1								-					
Bridge A									1					
Abutment A	N1													
ATI250	Abutment Wall Abutment A1	21	16 May 20 A	20 Jun 20	10	18 May 20	20 May 20					·····		
A 44 0 C 0	Abutment Wall - Abutment A1	31	16-May-20 A	20-Jun-20	-18	18-May-20	30-May-20							
A11260	Abutment Wall -Abutment A1 Backfill (~9m)-A butment A1 (Coarse fill)	31 12	16-May-20A 22-Jun-20	20-Jun-20 07-Jul-20	-18 -18	18-May-20 01-Jun-20	30-May-20 13-Jun-20							
Pier A2	Backfill (~9m)-A butment A1 (Coarse fill)	12	22-Jun-20	07-Jul-20	-18	01-Jun-20	13-Jun-20							
Pier A2 A11410	Backfill (~9m)-Abutment A1 (Coarse fill) PierA2-1	12 24	22-Jun-20 08-Jun-20 A	07-Jul-20 30-Jun-20	-18	01-Jun-20 23-May-20	13-Jun-20 13-Jun-20							
Pier A2 A11410 A11420	Backfill (~9m)-A butment A1 (Coarse fill)	12	22-Jun-20	07-Jul-20	-18	01-Jun-20	13-Jun-20							
Pier A2           A11410           A11420           Pier A3	Backfill (~9m)-Abutment A1 (Coarse fill) PierA 2-1 PierA 2-2	24 24	22-Jun-20 08-Jun-20 A 08-Jun-20 A	07-Jul-20 30-Jun-20 30-Jun-20	-18 -13 -13	23-May-20 23-May-20	13-Jun-20 13-Jun-20 13-Jun-20							
Pier A2 A11410 A11420 Pier A3 A11500	Backfill (~9m)-Abutment A1 (Coarse fill) PierA2-1 PierA2-2 PierA3-1 PierA3-1	12 24 24 24 24	22-Jun-20 08-Jun-20 A 08-Jun-20 A 08-Jun-20 A	07-Jul-20 30-Jun-20 30-Jun-20 09-Jun-20	-18 -13 -13 -13 -13	23-May-20 23-May-20 23-May-20 12-Jun-20	13-Jun-20 13-Jun-20 13-Jun-20 13-Jun-20 13-Jun-20							
Pier A2           A11410           A11420           Pier A3           A11500	Backfill (~9m)-Abutment A1 (Coarse fill) PierA 2-1 PierA 2-2	24 24	22-Jun-20 08-Jun-20 A 08-Jun-20 A	07-Jul-20 30-Jun-20 30-Jun-20	-18 -13 -13	23-May-20 23-May-20	13-Jun-20 13-Jun-20 13-Jun-20							
Pier A2           A11410           A11420           Pier A3           A11500           A11510           Pier A4	Backfill (~9m)-Abutment A1 (Coarse fill) PierA2-1 PierA2-2 PierA3-1 PierA3-1	12 24 24 24 24 24 24	22-Jun-20 08-Jun-20 A 08-Jun-20 A 08-May-20 A 08-May-20 A	07-Jul-20 30-Jun-20 30-Jun-20 09-Jun-20 09-Jun-20	-18 -13 -13 -13 -13 -13 -13 -13 -14 -14 -14 -18	23-May-20 23-May-20 23-May-20 12-Jun-20 12-Jun-20	13-Jun-20 13-Jun-20 13-Jun-20 13-Jun-20 13-Jun-20							
Pier A2           A11410           A11420           Pier A3           A11500           A11510           Pier A4           A11580	Backfill (~9m)-A butment A1 (Coarse fill) PierA 2-1 PierA 2-2 PierA 2-2 PierA 3-1 PierA 3-2 Ground beam between A4-1 & A4-2	12 24 24 24 24 24 24 24 12	22-Jun-20 08-Jun-20 A 08-Jun-20 A 08-May-20 A 08-May-20 A 08-May-20 A	07-Jul-20 30-Jun-20 30-Jun-20 09-Jun-20 09-Jun-20	-18 -13 -13 -13 -13 -13 -13 -13 -13 -13 -13	01-Jun-20       23-May-20       23-May-20       12-Jun-20       12-Jun-20       08-Jul-20	13-Jun-20 13-Jun-20 13-Jun-20 13-Jun-20 13-Jun-20 13-Jun-20 21-Jul-20							
Pier A2           A11410           A11420           Pier A3           A11500           A11510           Pier A4           A11580           A11590	Backfill (~9m)-Abutment A1 (Coarse fill) PierA 2-1 PierA 2-2 PierA 3-1 PierA 3-2 Ground beam between A4-1 & A4-2 PierA 4-1 PierA 4-1	12 24 24 24 24 24 24 24 12 24	22-Jun-20 08-Jun-20 A 08-Jun-20 A 08-May-20 A 08-May-20 A 08-Jun-20 08-Jun-20	07-Jul-20 30-Jun-20 30-Jun-20 09-Jun-20 09-Jun-20 20-Jun-20 09-Jun-20	-18 -13 -13 -13 4 4 4 24 24 4	23-May-20 23-May-20 23-May-20 23-Jun-20 12-Jun-20 08-Jul-20 12-Jun-20	13-Jun-20 13-Jun-20 13-Jun-20 13-Jun-20 13-Jun-20 21-Jul-20 13-Jun-20							
Pier A2           A11410           A11420           Pier A3           A11500           A11510           Pier A4           A11580           A11590           A11500	Backfill (~9m)-A butment A1 (Coarse fill) PierA21 PierA22 PierA32 PierA34 PierA32 Ground beam between A41 & A42 PierA41 PierA41 PierA42	12 24 24 24 24 24 24 24 12	22-Jun-20 08-Jun-20 A 08-Jun-20 A 08-May-20 A 08-May-20 A 08-May-20 A	07-Jul-20 30-Jun-20 30-Jun-20 09-Jun-20 09-Jun-20	-18 -13 -13 -13 -13 -13 -13 -13 -13 -13 -13	01-Jun-20       23-May-20       23-May-20       12-Jun-20       12-Jun-20       08-Jul-20	13-Jun-20 13-Jun-20 13-Jun-20 13-Jun-20 13-Jun-20 13-Jun-20 21-Jul-20							
Pier A2           A11410           A11420           Pier A3           A11500           A11510           Pier A4           A11580           A11590           A11600           Abutment A	Backfill (~9m)-Abutment A1 (Coarse fill) PierA24 PierA22 PierA34 PierA34 Ground beam between A4 1 & A4-2 PierA44 PierA42	12 24 24 24 24 24 24 12 24 24 24	22-Jun-20 08-Jun-20 A 08-Jun-20 A 08-May-20 A 08-May-20 A 08-May-20 A 08-May-20 A	07-Jul-20         30-Jun-20         30-Jun-20         09-Jun-20         09-Jun-20         20-Jun-20         09-Jun-20         09-Jun-20         09-Jun-20         09-Jun-20	-18 -13 -13 -13 4 4 4 	01-Jun-20         23-May-20         23-May-20         12-Jun-20         12-Jun-20         12-Jun-20         12-Jun-20         12-Jun-20         12-Jun-20	13-Jun-20 13-Jun-20 13-Jun-20 13-Jun-20 13-Jun-20 21-Jul-20 13-Jun-20 13-Jun-20							
Pier A2           A11410           A11420           Pier A3           A11500           A11510           Pier A4           A11580           A11590           A11600           Abutment A           A11320	Backfill (~9m)-A butment A1 (Coarse fill) PierA21 PierA22 PierA32 PierA34 PierA32 Ground beam between A41 & A4-2 PierA41 PierA42 S Backfill (~7m)-Abutment A5 (Coarse fill)	12 24 24 24 24 24 24 24 12 24	22-Jun-20 08-Jun-20 A 08-Jun-20 A 08-Jun-20 A 08-May-20 A 08-May-20 A 08-May-20 A 08-May-20 A 08-May-20 A 08-May-20 A	07-Jul-20       30-Jun-20       30-Jun-20       09-Jun-20       09-Jun-20       09-Jun-20       09-Jun-20       09-Jun-20       09-Jun-20       20-Jun-20       20-Jun-20       20-Jun-20	-18 -13 -13 -13 4 4 4 24 24 4 4 4 -13	23-May-20       23-May-20       23-May-20       12-Jun-20       12-Jun-20       12-Jun-20       12-Jun-20       23-May-20	13-Jun-20 13-Jun-20 13-Jun-20 13-Jun-20 13-Jun-20 21-Jul-20 13-Jun-20 13-Jun-20 05-Jun-20							
Pier A2           A11410           A11420           Pier A3           A11500           A11510           Pier A4           A11590           A11600           Abutment A           A11320           A11330	Backfill (~9m)-Abutment A1 (Coarse fill) PierA 2-1 PierA 2-2 PierA 3-1 PierA 3-2 Gound beam between A4-1 & A4-2 PierA 4-1 PierA 4-1 PierA 4-1 PierA 4-2 S Backfill (~7m)-Abutment A5 (Coarse fill) Transition Slab -Abutment A5	12 24 24 24 24 24 24 24 24 24 24 24 24	22-Jun-20 08-Jun-20 A 08-Jun-20 A 08-May-20 A 08-May-20 A 08-May-20 A 08-May-20 A	07-Jul-20         30-Jun-20         30-Jun-20         09-Jun-20         09-Jun-20         20-Jun-20         09-Jun-20         09-Jun-20         09-Jun-20         09-Jun-20	-18 -13 -13 -13 4 4 4 	01-Jun-20         23-May-20         23-May-20         12-Jun-20         12-Jun-20         12-Jun-20         12-Jun-20         12-Jun-20         12-Jun-20	13-Jun-20 13-Jun-20 13-Jun-20 13-Jun-20 13-Jun-20 21-Jul-20 13-Jun-20 13-Jun-20							
Pier A2           A11410           A11420           Pier A3           A11500           A11510           Pier A4           A11580           A11590           A11600           Abutment A           A11320	Backfill (~9m)-Abutment A1 (Coarse fill) PierA 2-1 PierA 2-2 PierA 3-1 PierA 3-2 Ground beam between A4-1 & A4-2 PierA 4-1 PierA 4-1 PierA 4-1 PierA 4-2 Statement A5 (Coarse fill) Transition Slab - Abutment A5	12 24 24 24 24 24 24 24 24 24 24 24 24	22-Jun-20 08-Jun-20 A 08-Jun-20 A 08-Jun-20 A 08-May-20 A 08-May-20 A 08-May-20 A 08-May-20 A 08-May-20 A 08-May-20 A 08-Jun-20 08-Jun-20	07-Jul-20         30-Jun-20         30-Jun-20         09-Jun-20         09-Jun-20         09-Jun-20         09-Jun-20         09-Jun-20         20-Jun-20         09-Jun-20         30-Jun-20         30-Jun-20         30-Jun-20         30-Jun-20         30-Jun-20         30-Jun-20         30-Jun-20	-18 -13 -13 -13 4 4 4 24 24 4 4 4 -13	23-May-20       23-May-20       23-May-20       12-Jun-20       12-Jun-20       12-Jun-20       12-Jun-20       23-May-20	13-Jun-20 13-Jun-20 13-Jun-20 13-Jun-20 13-Jun-20 21-Jul-20 13-Jun-20 13-Jun-20 05-Jun-20 13-Jun-20							
Pier A2           A11410           A11420           Pier A3           A11500           A11510           Pier A4           A11590           A11600           Abutment A           A11320           A11330           Deck Struct           A11610	Backfill (~9m)-Abutment A1 (Coarse fill) PierA 2:1 PierA 2:2 PierA 3:1 PierA 3:2 Gound beam between A4:1 & A4:2 PierA 3:2 PierA 4:1 PierA 4:1 PierA 4:2 PierA 4:1 PierA 4:2 S Backfill (~7m)-Abutment A5 (Coarse fill) Transition Slab -Abutment A5	12 24 24 24 24 24 24 24 24 24 24 24 24 24	22-Jun-20 08-Jun-20 A 08-Jun-20 A 08-Jun-20 A 08-May-20 A 08-May-20 A 08-May-20 A 08-May-20 A 08-Jun-20 08-Jun-20 08-Jun-20 08-Jun-20 08-Jun-20	07-Jul-20 30-Jun-20 30-Jun-20 09-Jun-20 09-Jun-20 09-Jun-20 09-Jun-20 09-Jun-20 20-Jun-20 20-Jun-20 30-Jun-20	-18 -13 -13 -13 -13 -13 -13 -13 -13 -18	01-Jun-20       23-May-20       23-May-20       12-Jun-20       12-Jun-20       12-Jun-20       12-Jun-20       23-May-20       08-Jul-20       12-Jun-20       08-Jul-20       08-Jul-20       08-Jul-20       12-Jun-20       08-Jul-20       12-Jun-20       12-Jun-20       12-Jun-20       12-Jun-20       12-Jun-20       12-Jun-20       12-Jun-20       12-Jun-20	13-Jun-20         21-Jul-20         13-Jun-20         21-Jul-20         13-Jun-20							
Pier A2           A11410           A11420           Pier A3           A11500           A11510           Pier A4           A11580           A11590           A11600           Abutment A           A11320           A11330           Deck Struct           A11610           A11620	Backfill (~9m)-Abutment A1 (Coarse fill) PierA 2.1 PierA 2.2 PierA 3.1 PierA 3.2 Ground beam between A4.1 & A4.2 PierA 4.2 PierA 4.1 PierA 4.1 PierA 4.2 Backfill (~7m)-Abutment A5 (Coarse fill) Transition Slab -Abutment A5	12 24 24 24 24 24 24 24 24 24 24 24 24 24	22-Jun-20 08-Jun-20 A 08-Jun-20 A 08-Jun-20 A 08-May-20 A 08-May-20 A 08-May-20 A 08-Jun-20 08-Jun-20 22-Jun-20 08-Jun-20 08-Jun-20 08-Jun-20	07-Jul-20         30-Jun-20         30-Jun-20         09-Jun-20         09-Jun-20         09-Jun-20         09-Jun-20         09-Jun-20         20-Jun-20         09-Jun-20         109-Jun-20         09-Jun-20         09-Jun-20         109-Jun-20         11-Aug-20         11-Aug-20         05-Aug-20	-18 -13 -13 -13 -13 -13 -13 -13 -13 -18 -13	23-May-20       23-May-20       23-May-20       12-Jun-20       12-Jun-20       12-Jun-20       12-Jun-20       23-May-20       08-Jul-20       12-Jun-20       08-Jul-20       08-Jul-20       12-Jun-20       12-Jun-20	13-Jun-20         21-Jul-20         21-Jul-20         21-Jul-20							
Pier A2           A11410           A11420           Pier A3           A11500           A11510           Pier A4           A11590           A11600           Abutment A           A11320           A11330           Deck Struct           A11610	Backfill (~9m)-Abutment A1 (Coarse fill) PierA 2:1 PierA 2:2 PierA 3:1 PierA 3:2 Gound beam between A4:1 & A4:2 PierA 3:2 PierA 4:1 PierA 4:1 PierA 4:2 PierA 4:1 PierA 4:2 S Backfill (~7m)-Abutment A5 (Coarse fill) Transition Slab -Abutment A5	12 24 24 24 24 24 24 24 24 24 24 24 24 24	22-Jun-20 08-Jun-20 A 08-Jun-20 A 08-Jun-20 A 08-May-20 A 08-May-20 A 08-May-20 A 08-May-20 A 08-Jun-20 08-Jun-20 08-Jun-20 08-Jun-20 08-Jun-20	07-Jul-20 30-Jun-20 30-Jun-20 09-Jun-20 09-Jun-20 09-Jun-20 09-Jun-20 09-Jun-20 20-Jun-20 20-Jun-20 30-Jun-20	-18 -13 -13 -13 -13 -13 -13 -13 -13 -18	01-Jun-20       23-May-20       23-May-20       12-Jun-20       12-Jun-20       12-Jun-20       12-Jun-20       23-May-20       08-Jul-20       12-Jun-20       08-Jul-20       08-Jul-20       08-Jul-20       12-Jun-20       08-Jul-20       12-Jun-20       12-Jun-20       12-Jun-20       12-Jun-20       12-Jun-20       12-Jun-20       12-Jun-20       12-Jun-20	13-Jun-20         21-Jul-20         13-Jun-20         21-Jul-20         13-Jun-20							

	in Sewage Treatment Works to Caverns (8-Jun-20)		Ctart	Circi-h-		onth Rolling Pro	-				
	Activity Name	Original Duration	Start	Finish	lotal Float	Late Start	Late Finish				
A11645	Steel Vehicle para pet ma nufa during	80	11-Jul-20	14-Oct-20	159	20-Jan-21	04-May-21	May		Jun	Jul
						20 out 21					
A13305	Bridge A structure complete	0		11-Aug-20	-18		21-Jul-20				
Bridge B											
Parapet	Charl Mahi da pom ant ma princh wing	80	11 10 20	14 Oct 20	152	12 lon 01	26 Apr 21				
A16810	Steel Vehicle para pet ma nufa during	80	11-Jul-20	14-Oct-20	153	13-Jan-21	26-Apr-21				
	for Access Road to Portion 12										
Retaining Wa			00. km 00	00.64.00	140	00 Nov 00	00 D 00				
A13962	Footing & wall structure - RMZ1 (Bay 1-2, 22.5-37.5m)	26	08-Jun-20	09-Jul-20	142	26-Nov-20	28-Dec-20				
A13990	Footing & wall structure - RMZ1 (Bay 6-10, 37.5-76.5m)	73	20-May-20 A	03-Aug-20	-49	06-Apr-20	04-Jun-20				1
A14000	Backfill - RMZ1 (Bay 6-10, 37.5-76.5m)(~6m)	60	23-Jun-20	02-Sep-20	-49	24-Apr-20	07-Jul-20				
A14010	RMZ1 complete	0		02-Sep-20	-49		07-Jul-20				
<b>Retaining Wa</b>	IIRMZ2										1
A14050	pile test - RMZ2 (bay 6-8)	26	08-Jun-20	09-Jul-20	-59	24-Mar-20	27-Apr-20				
A15470	ELS, Excavtion, Footing & wall structure - RMZ2 (Bay 1-3)(~7m)	121	16-Jan-20 A	21-Jul-20	69	29-Aug-20	12-Oct-20				
A15480	ELS, Excavtion, Footing & wall structure - RMZ2 (Bay 16 & 18)(~7m)	23	10-Jul-20	05-Aug-20	-59	28-Apr-20	26-May-20				
A15500	ELS, Excavtion, Footing & wall structure - RMZ2 (Bay 15 & 17)(~7m)	23	06-Aug-20	01-Sep-20	-59	27-May-20	22-Jun-20				
A15540	ELS, Excavtion, Footing & wall structure - RMZ2 (Bay 12 & 14)(~8m)	23	02-Sep-20	28-Sep-20	-59	23-Jun-20	21-Jul-20				
		20	02 000 20	20 000 20							
Cut Slope SN A14360	Z1 Excavation - Cut Slope SMZ1	12	08-Jun-20	20-Jun-20	-16	20-May-20	02-Jun-20				
	· · · · · · · · · · · · · · · · · · ·										
A14370	Slope formation - Cut Slope SMZ1	21	22-Jun-20	17-Jul-20	-16	03-Jun-20	27-Jun-20				
Cut Slope SM											
A14440	Excavation - Cut Slope SMZ5	19	08-Jun-20	30-Jun-20	-8	29-May-20	19-Jun-20				
A14450	Slope formation - Cut Slope SMZ5	31	02-Jul-20	06-Aug-20	-8	20-Jun-20	28-Jul-20				
Cut Slope SM	126										
A14460	Excavation (162 - 156 mpd) - SMZ6	11	08-Jun-20	19-Jun-20	-66	16-Mar-20	27-Mar-20				
A14470	Form temp working platform for soil nail - SMZ6	4	20-Jun-20	24-Jun-20	-66	28-Mar-20	01-Apr-20				
A14480	Soil Nail at 154mpd (D1-9 & TN4)-10nos-SMZ6	6	26-Jun-20	03-Jul-20	-66	02-Apr-20	09-Apr-20				
A14490	Soil Nail at 152mpd (C1-9 & TN3)-10nos - SMZ6	6	04-Jul-20	10-Jul-20	-66	14-Apr-20	20-Apr-20				
A14500	Slope & berm formation - SMZ6	31	11-Jul-20	15-Aug-20	-66	21-Apr-20	28-May-20				
A14800	Maintenance staircase & stepped channel - SMZ6	25	17-Aug-20	14-Sep-20	143	06-Feb-21	13-Mar-21				
		20	177409-20	1400920	140	001 00-21					
Cut Slope SN A14600	Excavation - Cut Slope SMZ8	19	08-Jun-20	30-Jun-20	64	24-Aug-20	14-Sep-20				
											<b>-</b>
A14610	Slope formation - Cut Slope SMZ8	31	02-Jul-20	06-Aug-20	64	15-Sep-20	22-Oct-20				
A14810	Maintenance staircase & stepped channel - SMZ8	25	07-Aug-20	04-Sep-20	169	06-Mar-21	07-Apr-21				
Road Works											
	rom A Kung Kok Shan Road to Bridge A										; 
A14850	Sub-soil drains from SMZ1 to BridgeA (RMZ1 bay 10)	18	22-Jul-20	11-Aug-20	-30	15-Jun-20	07-Jul-20				
A14860	400 dia contrete pipe around the road besides SMZ2	19	08-Jun-20	30-Jun-20	5	13-Jun-20	07-Jul-20				•
A14940	Road work from Kung Kok Shan Road access to Bridge A	18	03-Sep-20	23-Sep-20	-49	08-Jul-20	28-Jul-20				
Road work a	t Bridge A										
A14950	Road work at Bridge A	6	12-Aug-20	18-Aug-20	-18	22-Jul-20	28-Jul-20				
Road work fr	om Bridge A to Bridge B								1		
A14870	Catpatch (2nos) & U-channel at SMZ6	19	17-Aug-20	07-Sep-20	-66	29-May-20	19-Jun-20				
								1	1		1

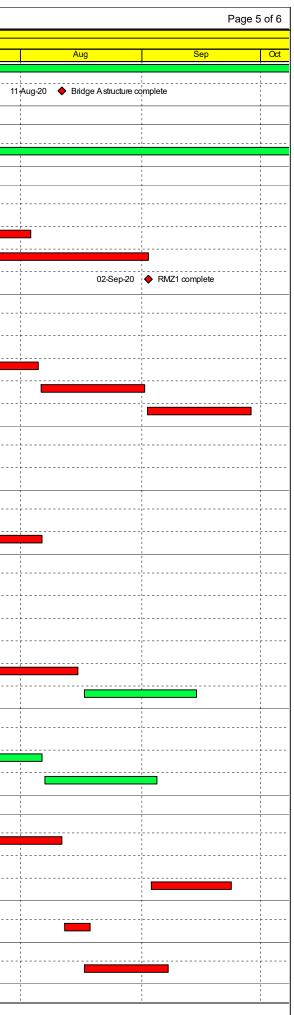

	Tin Sewage Treatment Works to Caverns (8-Jun-20)		Chart	Tisish		nth Rolling Pr	-	i			
tivity ID	Activity Name	Original Duration	Start	Finish	Iotal Float	Late Start	Late Finish				2020
A14970	Road work at bridge B	7	08-Jun-20	15-Jun-20	35	21-Jul-20	28-Jul-20	May		Jun	Jul
	ad to Portion 12 - Phase 2									<u> </u>	     
	in for Access Road to Portion 12										     
Cut Slope S											
A14510	Form temp working platform for soil nail - SMZ13	4	10-Jul-20	14-Jul-20	53	10-Sep-20	14-Sep-20				
A14520	Soil Nail at 161.5mpd (Ae1-16)- 16nos - SMZ13	9	15-Jul-20	24-Jul-20	53	15-Sep-20	24-Sep-20				
A14530	Soil Nail at 159.5 mpd (Ad1-15 & TN6)- 13nos - SMZ13	9	25-Jul-20	04-Aug-20	53	25-Sep-20	07-Oct-20				
A14540	Soil Nail at 157.5 mpd (Ac1-15)-15nos - SMZ13	9	05-Aug-20	14-Aug-20	53	08-Oct-20	17-Oct-20				
A14550	Soil Nail at 157.5 mpd (Ab1-16)-16nos - SMZ13	9	15-Aug-20	25-Aug-20	53	19-Oct-20	29-Oct-20				
A14560	Soil Nail at 155 mpd (Aa1-17 & TN5)-18nos-SMZ13	10	26-Aug-20	05-Sep-20	53	30-Oct-20	10-Nov-20				
A14710	SMZ13 soil nail complete	0		05-Sep-20	53		10-Nov-20				     
Road Works											
	from Bridge B to RMZ2 bay 11										
A14880	Catpatch (4nos) & U-channel from Bridge B to SMZ8	43	07-Sep-20	29-Oct-20	53	11-Nov-20	02-Jan-21				
A14890	Sub-soil drains from RMZ2 (bay 1-11)	25	08-Jun-20	08-Jul-20	201	06-Feb-21	13-Mar-21				
Road work	from RMZ2 bay 12 to RMZ3 bay 7										
A14910	Sub-soil drains from RW RMZ2 bay 12 to 18	35	08-Jun-20	20-Jul-20	199	04-Feb-21	23-Mar-21		1		· · · · · · · · · · · · · · · · · · ·
Other Work	(s Area										
TreeTreatme	ent										
Tree Treatm	nent										   
A11052	Tree transplant (Portion 8)	91	08-Jun-20	23-Sep-20	95	29-Sep-20	19-Jan-21		1		• • •
A11060	Tree felling & protection (Portion 10)	61	08-Jun-20	19-Aug-20	34	20-Jul-20	28-Sep-20				
A12400	Tree transplant (Portion 10)	91	20-Aug-20	07-Dec-20	34	29-Sep-20	19-Jan-21				
Community L	iaison Centre					I					
Community	/ Liaison Centre										
A10180	On stie installation (MIC)	20	26-May-20 A	27-Jun-20	-55	28-Mar-20	21-Apr-20				
A10200	Community Liaison Centre Building Complete	0		08-Jul-20	-56		29-Apr-20			08~	ul-20 🔶 Community Liaison
A10210	Feature Fence	61	24-Apr-20A	30-Jun-20	-56	27-Mar-20	22-Apr-20				•
A10220	Portable Planter	61	24-Apr-20A	30-Jun-20	-56	27-Mar-20	22-Apr-20				5
A10230	Landscape Works	18	16-Jun-20	08-Jul-20	-56	06-Apr-20	29-Apr-20				
Portion 10 - C	Coreboxes Containers Area										
	Coreboxes Containers Area								1		I I I
A10530	Demolished existing structure	32	20-Aug-20	25-Sep-20	93	10-Dec-20	19-Jan-21				

