

香港電燈有限公司
The Hongkong Electric Co., Ltd.



Re-provision of Open Cycle Gas Turbines at Lamma Power Station

Decommissioning/ Demolition & Construction Phases

Monthly Environmental Monitoring & Audit Report

November 2022

香港電燈有限公司
The Hongkong Electric Co., Ltd.



ENVIRONMENTAL IMPACT ASSESSMENT (EIA) ORDINANCE, CAP. 499

ENVIRONMENTAL PERMIT NO. EP-600/2022

**RE-PROVISION OF OPEN CYCLE GAS TURBINES
AT LAMMA POWER STATION**



Title	<u>Monthly EM&A Report (November 2022)</u>
Date	<u>14 December 2022</u>
Certified by	 <u>(Mr. Kenneth Fung, Environmental Team Leader)</u>
Verified by	 <u>Mr. Y. W. Fung (AECOM Asia Company Limited, Independent Environmental Checker)</u>

TABLE OF CONTENT

EXECUTIVE SUMMARY

1.	INTRODUCTION	1
1.1	Background	1
1.2	Project Organization	1
1.3	Key Construction Works Undertaken during the Reporting Month	1
1.4	Summary of EM&A Requirements	4
2.	ENVIRONMENTAL AUDIT	5
2.1	Site Inspection	5
2.2	Status of Environmental Licensing and Permitting	5
2.3	Waste Management	5
2.4	Implementation Status of Land Contamination Assessment	6
2.5	Implementation Status of Environmental Mitigation Measures	6
3.	REPORT ON COMPLAINTS, NOTIFICATION OF SUMMONS AND SUCCESSFUL PROSECUTIONS	7
3.1	Implementation Status of Environmental Complaint Handling Procedures	7
3.2	Environmental Summon and Successful Prosecution	7
4.	FUTURE KEY ISSUES	8
4.1	Construction Program for the Coming Month	8
4.2	Key Issues for the Coming Month	8
5.	CONCLUSION	9

LIST OF TABLES

Table 1.1	Construction Activities and Corresponding Environmental Mitigation Measures
Table 2.1	Status of Environmental Licensing and Permitting
Table 2.2	Estimated Quantities of Waste Generated in November 2022
Table 3.1	Environmental Complaints Received in November 2022
Table 3.2	Outstanding Environmental Complaints Carried Over
Table 3.3	Notifications of Summon or Successful Prosecution Received in November 2022
Table 3.4	Notifications of Summon or Successful Prosecution Carried Over

LIST OF FIGURES

Figure 1.1	The Project Area
Figure 1.2	Decommissioning and Construction Phasing Schedule
Figure 1.3	Locations of Air Sensitive Receivers
Figure 1.4	Locations of Noise Sensitive Receivers
Figure 1.5	Locations of Water Sensitive Receivers

APPENDICES

Appendix A	Organization Chart
Appendix B	Tentative Decommissioning and Construction Programme
Appendix C	Summary of EMIS
Appendix D	Summary of Site Audit Findings
Appendix E	Monthly Waste Flow Table for November 2022

EXECUTIVE SUMMARY

In April 2022, an Environmental Permit (EP-600/2022) was granted to the Hongkong Electric Co., Ltd. (HK Electric) for the decommissioning/ demolition, construction and operation of the Project entitled “Re-provision of Open Cycle Gas Turbines at Lamma Power Station”. This report, prepared by the Environmental Team, presents the Environmental Monitoring and Audit (EM&A) findings for the Project in November 2022 and is the 5th Monthly EM&A Report for the decommissioning/ demolition and construction phases of the Project.

Key Construction Activities Undertaken

The construction activities undertaken in the reporting month are as follows:

- Trenching works;
- Diversion of power supply;
- GTAB plant equipment demolition;
- Scrapped material removal works;
- Lifting and cut;
- Assembly of crawler crane; and
- Operation of cherry picker.

Environmental Monitoring

According to the EM&A Manual, no environmental monitoring was necessary in view of the anticipated insignificant environmental impact.

Site Environmental Audit and Implementation of Mitigation Measure

Independent Environmental Checker (IEC) conducted a site inspection on 22/11/2022. The site conditions were generally satisfactory.

Weekly site audits were carried out to monitor environmental issues on the construction site. The site conditions were generally satisfactory. All recommended environmental mitigation measures were properly implemented. No environmental non-compliance was recorded in the reporting month.

Environmental Licensing and Permitting

License/Permit	Ref. No.	Valid Period		Authority/Holder	Date Issued
		From	To		
Environmental Permit	EP-600/2022	01/04/2022	-	EPD/HK Electric	01/04/2022
Waste Disposal Billing Account	Account No.: 7044319	27/06/2022	-	EPD/Contractor	27/06/2022
Registration of Chemical Waste Producer	5213-912-P2781-22	22/02/2016	-	EPD/Contractor	22/02/2016
EPD Notification (Dust) Construction, Air Pollution Control (Construction Dust) Regulation	481782	07/07/2022	-	EPD/Contractor	07/07/2022

Environmental Complaints / Summons/ Prosecutions

No complaint in relation to the environmental impact of the construction activities was received in the reporting month. There was also no notification of summon and successful prosecution for breaches of relevant environmental legislations received in the reporting month.

Future Key Issues

The construction activities scheduled for the coming month are mainly trenching works, installation of trench covers, site hoarding temporary lighting setup, demolition of ducting, and equipment demolition for E&M works.

The future key issues to be considered in the coming month are as follows:

- Relevant environmental legislations should be observed.
- Relevant environmental licenses/permits should be obtained, if required.
- Required environmental mitigation measures should be properly implemented.
- Good site practices should be adopted to minimize environmental impacts.
- Dust suppression measures should be implemented for the construction activities.
- Wastewater from site facilities should be properly collected and stored within the site area.
- Generation of waste should be minimized.
- Waste generated should be properly stored and disposed of.

Reporting Changes

There was no reporting change in the reporting month.

Concluding Remarks

The environmental performance of the Project was generally satisfactory.

1. INTRODUCTION

1.1 Background

In April 2022, an Environmental Permit (EP-600/2022) was granted to HK Electric for the decommissioning/ demolition, construction and operation of the Project entitled “Re-provision of Open Cycle Gas Turbines at Lamma Power Station”. An Environmental Team was then formed to implement the Environmental Monitoring and Audit (EM&A) programme in accordance with the EM&A Manual for the Project.

The key components of the Project are outlined as follows:

- Decommissioning and demolition of four oil-fired open cycle gas turbine units (GT2, GT3, GT4 and GT6) and one gas-fired combined cycle gas turbine unit (GT57), and auxiliary equipment including the black start gas turbine (BSGT), the miscellaneous storage shed, and the lube oil storage tank near GT5;
- Construction of four new oil-fired open cycle gas turbine units (GT8, GT9, GT 10 and GT11), and installation of the new BSGT and Battery Energy Storage System (BESS);
- Construction of new cable trenches, staircase and lift, and reconstruction of the GT57 Auxiliary Building (GTAB) to a new 132kV Switching Station; and
- Operation of four new oil-fired open cycle gas turbine units (GT8, GT9, GT10 and GT11).

The EM&A programme was commenced on 1 July 2022. This is the 5th monthly EM&A report which summarizes the environmental monitoring and audit work for the Project for the month of November 2022.

1.2 Project Organization

The management structure to oversee the Project includes the following:

- Project Proponent (HK Electric);
- Environmental Protection Department (EPD);
- Independent Environmental Checker (IEC);
- Environmental Team (ET); and
- Contractor.

The project organisation chart for the EM&A programme is shown in [Appendix A](#).

1.3 Key Construction Works Undertaken during the Reporting Month

The Project area is shown in [Figure 1.1](#), and the tentative decommissioning and construction phasing schedule is shown in [Figure 1.2](#).

The locations of air, noise and water sensitive receivers are shown in [Figure 1.3](#), [Figure 1.4](#) and [Figure 1.5](#) respectively.

The main construction activities carried out during the reporting month and the corresponding environmental mitigation measures are summarized in [Table 1.1](#). The implementation status of the major mitigation measures in the reporting month can be found in [Appendix C](#).

Table 1.1 Construction Activities and Corresponding Environmental Mitigation Measures

Item	Activities	Environmental Mitigation Measures
1.	Trenching works	<p><i>Air</i></p> <ul style="list-style-type: none"> – All regulated machine attached with valid exception/ approval NRMM labels. – Water spraying for concrete breaking works. – Excavated material stockpile will be temporary covered with canvas or transferred to temporary storage location for backfill later. <p><i>Noise</i></p> <ul style="list-style-type: none"> – Noise emission label was provided for air compressor. – No works will be conducted during restricted hours at this moment. <p><i>Wastewater</i></p> <ul style="list-style-type: none"> – No wastewater is required to be discharged at this moment. – Sand bag barriers was set up as preventive measures. <p><i>Waste Management</i></p> <ul style="list-style-type: none"> – Excavated material was temporary stored for backfilling later. – Scrape metal will be recycled. – Chemical waste should be collected by licensed collector.
2.	Diversion of power supply	<p><i>Air</i></p> <ul style="list-style-type: none"> – No impact to the quality of air for this works. <p><i>Noise</i></p> <ul style="list-style-type: none"> – No works will be conducted during restricted hours at this moment. <p><i>Wastewater</i></p> <ul style="list-style-type: none"> – No wastewater is required to be discharged. <p><i>Waste Management</i></p> <ul style="list-style-type: none"> – Electrical wire will be recycled.
3.	GTAB plant equipment demolition	<p><i>Air</i></p> <ul style="list-style-type: none"> – No impact to the quality of air for this works. <p><i>Noise</i></p> <ul style="list-style-type: none"> – No works will be conducted during restricted hours at this moment. <p><i>Wastewater</i></p> <ul style="list-style-type: none"> – No wastewater is required to be discharged.

Item	Activities	Environmental Mitigation Measures
		<p><i>Waste Management</i></p> <ul style="list-style-type: none"> – Scrap metal will be recycled.
4.	Scrapped material removal works	<p><i>Air</i></p> <ul style="list-style-type: none"> – All regulated machine attached with valid exception/ approval NRMM labels. <p><i>Noise</i></p> <ul style="list-style-type: none"> – No works will be conducted during restricted hours at this moment. <p><i>Wastewater</i></p> <ul style="list-style-type: none"> – No wastewater is required to be discharged. <p><i>Waste Management</i></p> <ul style="list-style-type: none"> – Scrapped metal will be recycled.
5.	Lifting and cut	<p><i>Air</i></p> <ul style="list-style-type: none"> – Fence off the working area to avoid dust emission. <p><i>Noise</i></p> <ul style="list-style-type: none"> – No works will be conducted during restricted hours at this moment. <p><i>Wastewater</i></p> <ul style="list-style-type: none"> – No wastewater is required to be discharged. <p><i>Waste Management</i></p> <ul style="list-style-type: none"> – Scrapped metal will be recycled.
6.	Assembly of crawler crane	<p><i>Air</i></p> <ul style="list-style-type: none"> – All regulated machine attached with valid exception/ approval NRMM labels. <p><i>Noise</i></p> <ul style="list-style-type: none"> – No works will be conducted during restricted hours at this moment. <p><i>Wastewater</i></p> <ul style="list-style-type: none"> – No wastewater is required to be discharged. <p><i>Waste Management</i></p> <ul style="list-style-type: none"> – No waste will be generated.

Item	Activities	Environmental Mitigation Measures
7.	Operation of cherry picker	<p><i>Air</i></p> <ul style="list-style-type: none"> – All regulated machine attached with valid exception/ approval NRMM labels. <p><i>Noise</i></p> <ul style="list-style-type: none"> – No works will be conducted during restricted hours at this moment. <p><i>Wastewater</i></p> <ul style="list-style-type: none"> – No wastewater is required to be discharged. <p><i>Waste Management</i></p> <ul style="list-style-type: none"> – No waste will be generated.

1.4 Summary of EM&A Requirements

Impact Monitoring

According to the EM&A Manual, no routine impact monitoring for air quality, noise and water quality is necessary in view of the anticipated insignificant environmental impact.

Environmental Audit

Regular environmental audits on air quality, noise, water quality, waste management, and land contamination are required. Details of the audits are summarized in [Section 2](#) of this report.

Report on complaints, notification of summons and successful prosecutions are given in [Section 3](#) of this report.

Future key issues are given in [Section 4](#) of this report.

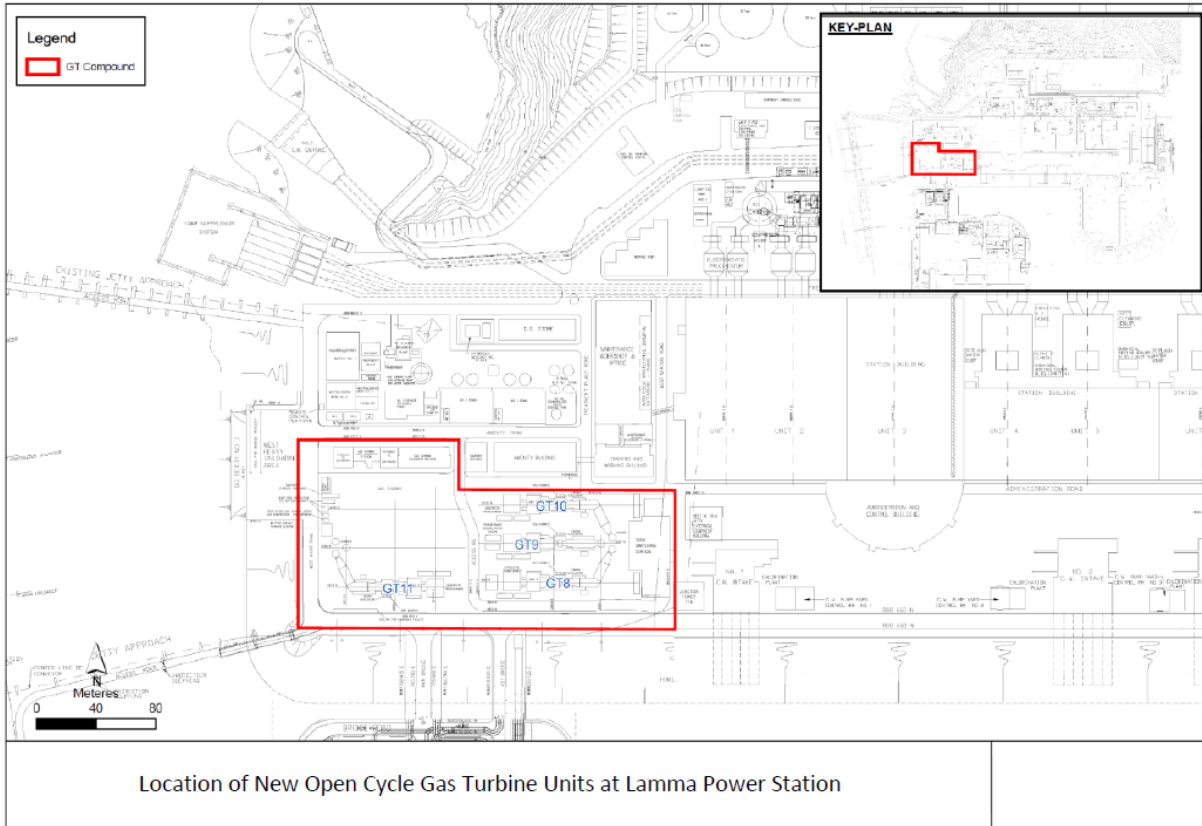
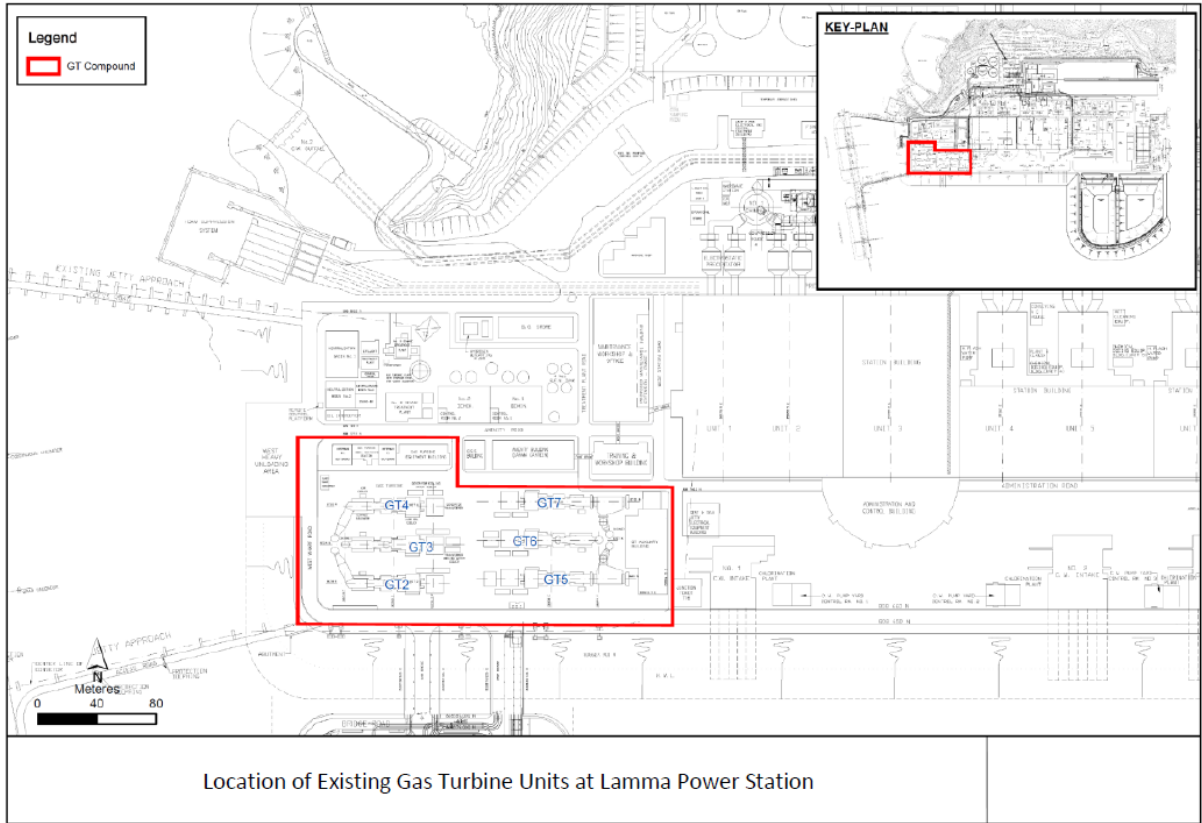


Figure 1.1 The Project Area

		Q1 2022	Q2 2022	Q3 2022	Q4 2022	Q1 2023	Q2 2023	Q3 2023	Q4 2023	Q1 2024	Q2 2024	Q3 2024	Q4 2024	Q1 2025	Q2 2025	Q3 2025	Q4 2025	Q1 2026	Q2 2026	Q3 2026	Q4 2026
GT57	Decommissioning of GT57																				
Demolition of GT7	Demolition of E&M equipment in GTAB																				
	Demolition of HRSG Demolition of gas turbine, generator, generator transformer and auxiliary equipment																				
GT10	Anchor bolt replacement																				
	Stack refurbishment																				
	Construction of gas turbine, generator, generator transformer and auxiliary equipment																				
	Testing and Commissioning																				
Demolition of GT5	Demolition of HRSG Demolition of gas turbine, generator, generator transformer and auxiliary equipment																				
	Anchor bolt replacement Construction of gas turbine, generator, generator transformer and auxiliary equipment																				
GT8	Anchor bolt replacement																				
	Construction of gas turbine, generator, generator transformer and auxiliary equipment																				
	Testing and Commissioning																				
Demolition of GT6	Decommissioning Demolition of gas turbine, generator, generator transformer and auxiliary equipment																				
	Anchor bolt replacement Construction of gas turbine, generator, generator transformer and auxiliary equipment																				
GT9	Anchor bolt replacement																				
	Construction of gas turbine, generator, generator transformer and auxiliary equipment																				
	Testing and Commissioning																				
GT2	Decommissioning	To be advised																			
	Demolition																				
GT3	Decommissioning																				
	Demolition																				
GT4	Decommissioning																				
	Demolition																				
GT11	Construction																				
	Testing and Commissioning																				

Figure 1.2 Decommissioning and Construction Phasing Schedule



Figure 1.3 Locations of Air Sensitive Receivers within the 15km Assessment Area



Figure 1.4 Locations of Noise Sensitive Receivers

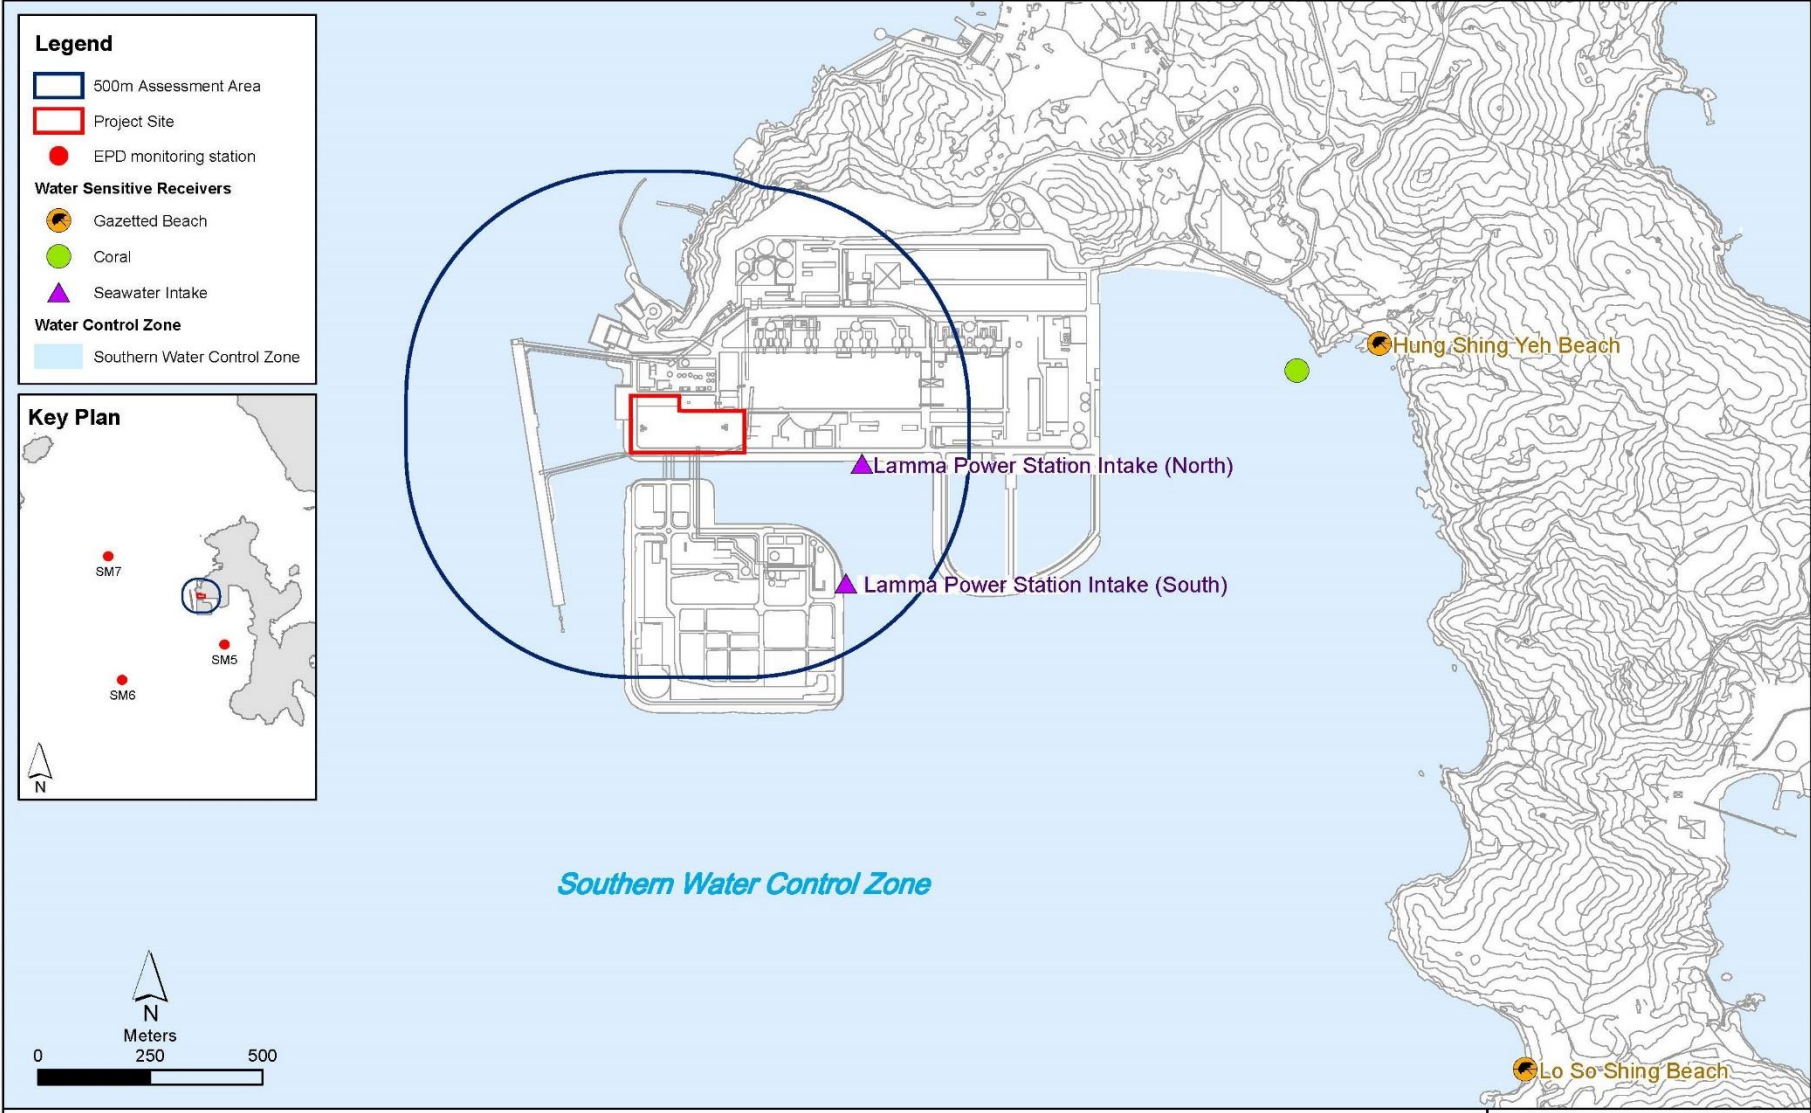


Figure 1.5 Locations of Water Sensitive Receivers

2. ENVIRONMENTAL AUDIT

2.1 Site Inspection

Independent Environmental Checker (IEC) conducted a site inspection on 22/11/2022. The site conditions were generally satisfactory.

Weekly site audits were carried out by the Environmental Team in the reporting month to ensure compliance with relevant legislations and other requirements. The site audit findings or recommendations in the reporting month are summarized in [Appendix D](#). The site conditions were generally satisfactory. No non-compliance was recorded during the site inspection. All recommended mitigation measures were properly implemented.

2.2 Status of Environmental Licensing and Permitting

The licenses/permits obtained for the Project as of end November 2022 are summarised in [Table 2.1](#).

Table 2.1 Status of Environmental Licensing and Permitting

License/Permit	Ref. No.	Valid Period		Description	Status
		From	To		
Environmental Permit	EP-600/2022	01/04/2022	-	For the decommissioning/ demolition, construction and operation of the Project	Valid
Waste Disposal Billing Account	Account No.: 7044319	27/06/2022	-	Civil Work	Valid
Registration of Chemical Waste Producer	5213-912-P2781-22	22/02/2016	-	Civil Work	Valid
EPD Notification (Dust) Construction, Air Pollution Control (Construction Dust) Regulation	481782	07/07/2022	-	Civil Work	Valid

2.3 Waste Management

All wastes produced were managed in accordance with the Waste Management Plan, good waste management practices, and statutory regulations and requirements.

The estimated quantities of wastes generated in November 2022 are summarized in [Table 2.2](#).

Table 2.2 Estimated Quantities of Waste Generated in November 2022

Total Inert C&D Waste Materials	Non-inert C&D Materials		
	C&D Materials Recycled	C&D Waste Disposed of at Landfill	Chemical Waste
0 Tonnes	0 Tonnes	0 Tonnes	0 Litres

The monthly waste flow tables prepared by the contractors are attached in [Appendix E](#).

2.4 Implementation Status of Land Contamination Assessment

The EIA study has recommended to conduct site investigation and sampling at five hotspot locations (i.e. 4 boreholes and 1 trial pit) to assess the potential land contamination impacts within the Project site in accordance with the Contaminated Assessment Plan (CAP). Site investigation and soil and groundwater sampling will be undertaken in accordance with the CAP under the supervision of a Land Contamination Specialist when the proposed sampling locations are made available after the demolition of the existing units and structures.

2.5 Implementation Status of Environmental Mitigation Measures

Mitigation measures detailed in the Environmental Permit and the EM&A Manual are required to be implemented. A summary of the Environmental Mitigation Implementation Schedule (EMIS) is presented in [Appendix C](#).

3. REPORT ON COMPLAINTS, NOTIFICATION OF SUMMONS AND SUCCESSFUL PROSECUTIONS

3.1 Implementation Status of Environmental Complaint Handling Procedures

No complaint in relation to the environmental impact of the construction activities was received in the reporting month.

Table 3.1 Environmental Complaints Received in November 2022

Case Reference / Date, Time Received / Date, Time Concerned	Descriptions /Actions Taken	Conclusion / Status
Nil	N/A	N/A

Table 3.2 Outstanding Environmental Complaints Carried Over

Case Reference / Date, Time Received / Date, Time Concerned	Descriptions /Actions Taken	Conclusion / Status
Nil	N/A	N/A

3.2 Environmental Summon and Successful Prosecution

No notification of summon or successful prosecution was received in the reporting month.

Table 3.3 Notifications of Summon or Successful Prosecution Received in November 2022

Case Reference / Date, Time Received / Date, Time Concerned	Descriptions /Actions Taken	Conclusion / Status
Nil	N/A	N/A

Table 3.4 Notifications of Summon or Successful Prosecution Carried Over

Case Reference / Date, Time Received / Date, Time Concerned	Descriptions /Actions Taken	Conclusion / Status
Nil	N/A	N/A

4. FUTURE KEY ISSUES

4.1 Construction Program for the Coming Month

The construction activities scheduled for the coming month are mainly trenching works, installation of trench covers, site hoarding temporary lighting setup, demolition of ducting, and equipment demolition for E&M works. (see [Appendix B](#)).

4.2 Key Issues for the Coming Month

Key issues to be considered and recommended in the coming month include:

General

- Relevant environmental legislations should be observed.
- Relevant environmental licenses/permits should be obtained, if required.
- Required environmental mitigation measures should be properly implemented.

Air

- Dust suppression measures should be implemented for the construction activities.

Noise

- General noise mitigation measures should be employed at work site.

Water

- Wastewater from site facilities should be properly collected and stored within the site area.
- Good site practices should be adopted.

Waste

- Waste Management Plan submitted should be implemented
- Good site practices should be adopted.

Land Contamination

- Good site practices should be adopted.

5. CONCLUSION


According to the EM&A Manual, environmental monitoring was not necessary in view of the anticipated insignificant environmental impact. Environmental audits were performed in accordance with the EM&A Manual.

All recommended environmental mitigation measures were properly implemented. No complaint in relation to the environmental impact of the construction activities was received in the reporting month. There was also no notification of summon and successful prosecution for breaches of relevant environmental legislations received in the reporting month.

No non-compliance was recorded in the reporting month.

The environmental performance of the Project was generally satisfactory.

Appendix A Organization Chart

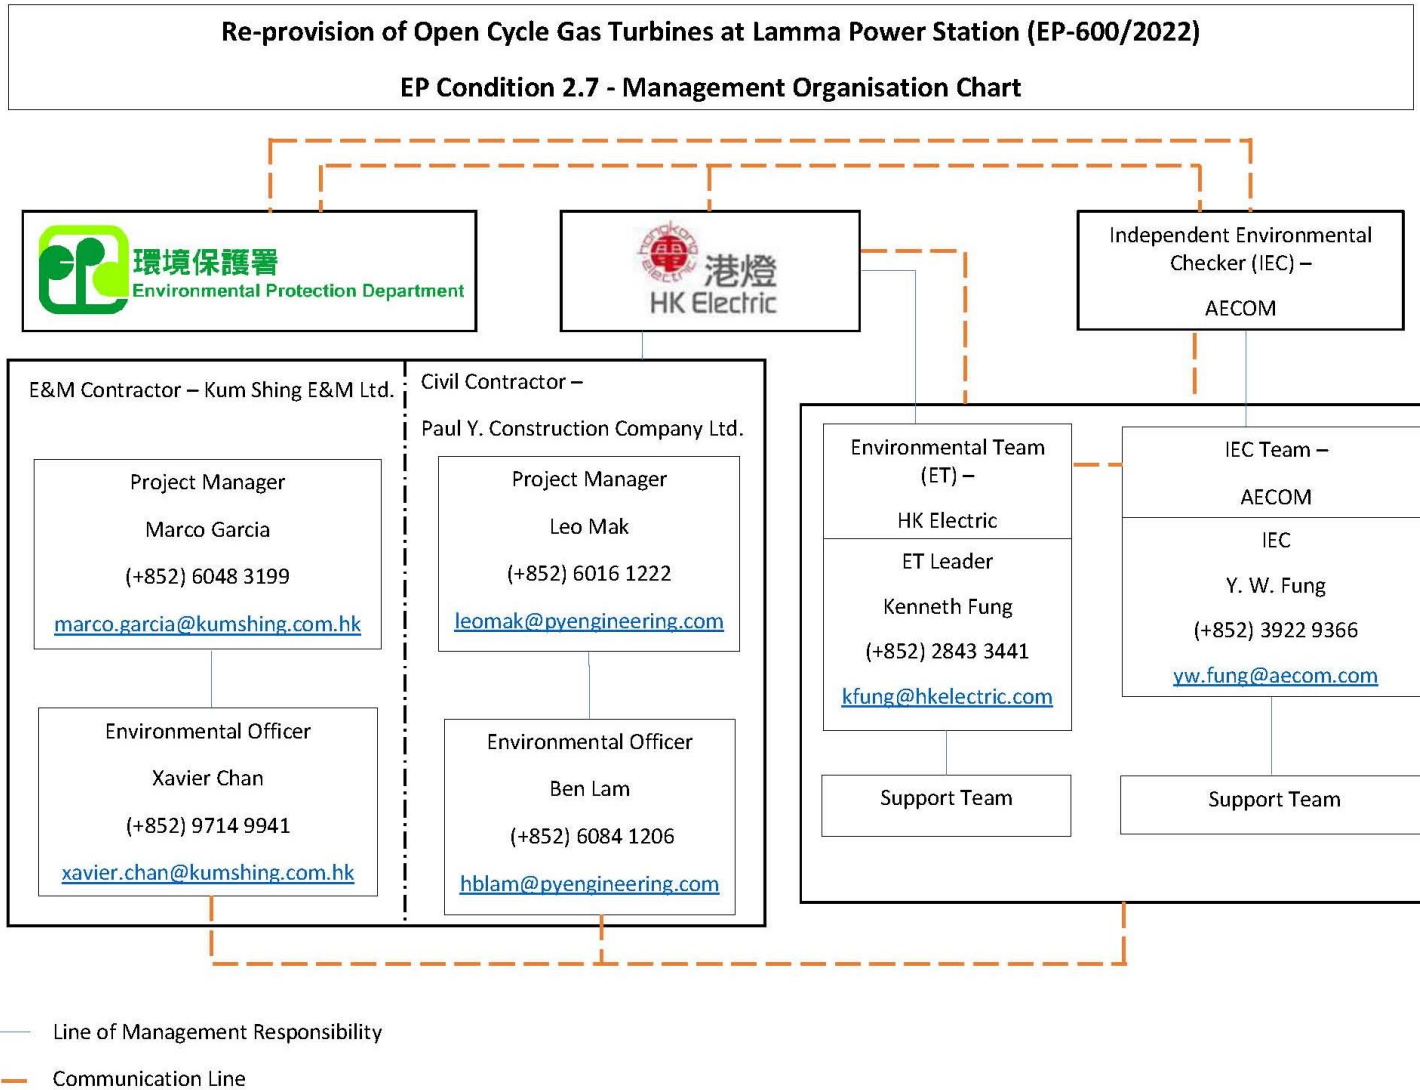

Appendix B2 Tentative Decommissioning and Construction Programme (E&M Contractor)




Re-provision of Open Cycle Gas Turbines at Lamna Power Station
 Monthly EM&A Report for November 2022

HKE LPS OCGT Re-Provision						
ID	Task	Task Name	Duration	Start	Finish	2022
33		Diversion of power supply, control and alarm monitoring cable for Sewage Sump Pit SMS Sump Pump "A", with supply of associated cable and cable supporting system (Waiting for Cable Delivery (lead	4 days	Fri 22/11/04	Tue 22/11/08	
34		Cable Lying Work	3 days	Fri 22/11/04	Mon 22/11/07	
35		Termination Work	1 day	Mon 22/11/07	Tue 22/11/08	
36		Diversion of power supply, control and alarm monitoring cable for Oily Drain DMG-03 Sump Pump, with supply of associated cable and cable supporting	4 days	Mon 22/11/07	Thu 22/11/10	
37		Cable Lying Work	3 days	Mon 22/11/07	Wed 22/11/09	
38		Termination Work	1 day	Wed 22/11/09	Thu 22/11/10	
39		Diversion of power supply for DC230V Battery Charger and GT57 Lighting Inverter 3 with supply of associated cable and cable	2 days	Wed 22/10/26	Thu 22/10/27	
40		Termination Work	2 days	Wed 22/10/26	Thu 22/10/27	
41		Diversion of power supply for 6.6-kV GT Station Board 2 with associated 6.6-kV cable joint box after de-commissioning of existing 6.6-kV GT57 Station Board and after power receiving of new 6.6-kV GT	17.5 days	Sat 22/10/29	Wed 22/11/16	
42		Scaffolding Work	8 days	Sat 22/10/29	Mon 22/11/07	
43		Junction Box Installation	3 days	Thu 22/11/03	Sat 22/11/05	
44		Cable Removal	7 days	Sat 22/11/05	Sat 22/11/12	
45		Termination Work	3 days	Sat 22/11/12	Wed 22/11/16	
46		Diversion of power supply for GTAB 2/F Overhead Crane	8 days	Fri 22/11/04	Sat 22/11/12	
47		Scaffolding Work	3 days	Fri 22/11/04	Mon 22/11/07	
48		Cable Lying Work	6 days	Fri 22/11/04	Thu 22/11/10	
49		Termination Work	2 days	Thu 22/11/10	Sat 22/11/12	
50		HRSRG Demolition	183.25 days	Fri 22/11/04	Fri 23/05/12	
51		Demolition of HRSGS	127 days	Mon 23/01/02	Fri 23/05/12	
52		Mobile Crane on Site	0 days	Mon 23/01/02	Mon 23/01/02	
53		Set Up and Load Test on Mobile Crane	3 days	Mon 23/01/02	Wed 23/01/04	
54		Mobile Cranae Ready for Use	0 days	Wed 23/01/04	Wed 23/01/04	
55		Set Up of Crawler Crane	13 days	Mon 23/01/02	Sat 23/01/14	
56		Load Test on Crawler Crane	5 days	Tue 23/01/10	Sat 23/01/14	
57		Crawler Crane Ready for Use	0 days	Sat 23/01/14	Sat 23/01/14	
58		Removal of Gas Outlet Duct	10 days	Wed 23/01/04	Sat 23/01/14	
62		Removal of Steam Room EL +23300 – EL +	40 days	Sat 23/01/14	Sat 23/02/25	
76		Removal of Gas Inlet Duct	10 days	Sat 23/02/25	Tue 23/03/07	
81		Removal of HRSRG Roof – above Hot Beam	12 days	Wed 23/03/08	Mon 23/03/20	
83		Removal of Modules – Boiler Internal – 5	20 days	Mon 23/03/20	Mon 23/04/10	
91		Removal of HRSRG External platforms in controlled manner	20 days	Mon 23/04/10	Mon 23/05/01	

Project: KEM-HKE-OCGT_Reprov	Task	Project Summary	Manual Task	Start-only	Deadline
Date: Wed 23/10/26	Split	Inactive Task	Duration-only	Finish-only	Progress
	Milestone	Inactive Milestone	Manual Summary Rollup	External Tasks	Manual Progress
	Summary	Inactive Summary	Manual Summary	External Milestone	

Re-provision of Open Cycle Gas Turbines at Lamma Power Station
 Monthly EM&A Report for November 2022

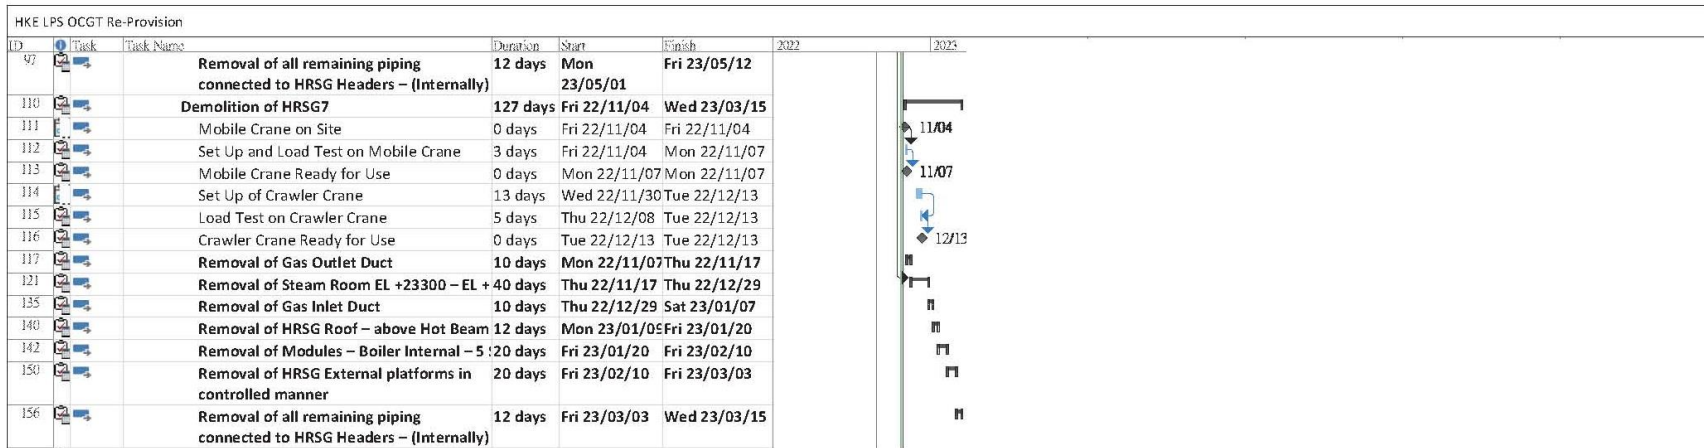

Project: KEM-HKE-OCGT_Reprov
 Date: Wed 22/10/26

Task		Project Summary		Manual Task		Start-only		Deadline	
Split		Inactive Task		Duration-only		Finish-only		Progress	
Milestone		Inactive Milestone		Manual Summary Rollup		External Tasks		Manual Progress	
Summary		Inactive Summary		Manual Summary		External Milestone			


Page 3

Re-provision of Open Cycle Gas Turbines at Lamna Power Station
 Monthly EM&A Report for November 2022

HKE LPS OCGT Re-Provision						2022	2023
ID	Task	Task Name	Duration	Start	Finish		
188		Disconnect the Pipe and Associated Equipment from Gas Turbine	14 days	Wed 25/05/28	Wed 25/06/11		
189		Lift and Move the Gas Turbine from GT Foundation to the Transporter	12 days	Wed 25/06/11	Tue 25/06/24		
190		Disconnect the Pipe and Associated Equipment from Gas Exhaust Duct	14 days	Wed 25/06/11	Wed 25/06/25		
191		Lift and Move the Gas Exhaust Duct to the Transporter	24 days	Thu 25/06/26	Mon 25/07/21		
192		Dismantle and Removal of Other E&M Equ	40 days	Mon 25/07/21	Sat 25/08/30		
193		Use the SPMT to Transport the Equipment to Designated Storage Area	40 days	Mon 25/07/21	Sat 25/08/30		
194		Demolition of GT7	143 days	Sat 22/12/31	Mon 23/05/29		
195		Set Up Mobile Gantry Crane	14 days	Sat 22/12/31	Sat 23/01/14		
196		Load Test on Gantry Crane	5 days	Tue 23/01/10	Sat 23/01/14		
197		Gantry Crane Ready for Use	0 days	Sat 23/01/14	Sat 23/01/14		
198		Disconnect the Pipe and Associated Equipment from Generator	14 days	Sat 23/01/14	Sat 23/01/28		
199		Lift and Move the Generator from GT Foundation to the Transporter	12 days	Sat 23/01/28	Fri 23/02/10		
200		Disconnect the Pipe and Associated Equipment from Gas Turbine	14 days	Sat 23/01/28	Mon 23/02/13		



206		GTAB Plant Equipment Demolition	98 days	Fri 22/10/21	Tue 23/01/31		
207		Cable Diversion	37 days	Mon 22/10/24	Wed 22/11/30		
208		Dismantle of Auxiliary Equipment from GTAB Pump set, Cooler, Air Receiver and Related	20 days	Fri 22/10/21	Fri 22/11/11		
209		Fence off working area	2 days	Fri 22/10/21	Mon 22/10/24		
210		Disconnect the power supply from each eq	2 days	Mon 22/10/24	Tue 22/10/25		
211		Install the blind plates and isolate valves for isolation with the system before	2 days	Tue 22/10/25	Thu 22/10/27		
212		Drain and vent all the steam / gas / water - HKE to support	2 days	Thu 22/10/27	Sat 22/10/29		
213		Pump Set and pipe Removal	2 days	Sat 22/10/29	Tue 22/11/01		
214		Disconnect all auxiliary piping and tubing	2 days	Tue 22/11/01	Wed 22/11/02		
215		Remove equipment from baseplate by using fork lift	2 days	Thu 22/11/03	Fri 22/11/04		
216		Relocate equipment from GTAB to designated storage area	2 days	Fri 22/11/04	Mon 22/11/07		



Project: KEM-HKE-OCGT_Reprov Date: Wed 22/10/26	Task		Project Summary		Manual Task		Start-only		Deadline	
	Split		Inactive Task		Duration-only		Finish-only		Progress	
	Milestone		Inactive Milestone		Manual Summary Rollup		External Tasks		Manual Progress	
	Summary		Inactive Summary		Manual Summary		External Milestone			

Page 4

Re-provision of Open Cycle Gas Turbines at Lamna Power Station
 Monthly EM&A Report for November 2022

HKE LPS OCGT Re-Provision						
ID	Task	Task Name	Duration	Start	Finish	2022
217		Erect mobile scaffold / use scissor lift to access pipework inside GTAB	2 days	Mon 22/11/07	Wed 22/11/09	
218		Dismantle pipe and pipe support by undo all fixing bolt and hanger	2 days	Wed 22/11/09	Fri 22/11/11	
219		Air Receiver, Filter, Dryer and Pipework Remc	18 days	Tue 22/11/01	Sat 22/11/19	
220		Disconnect pipework from air compressor	3 days	Tue 22/11/01	Thu 22/11/03	
221		Install the blind plates and isolate valves for isolation with the system before	3 days	Thu 22/11/03	Mon 22/11/07	
222		Drain and vent all the steam/ gas/ water to ensure no harness	3 days	Mon 22/11/07	Thu 22/11/10	
223		Remove all compressed air pipe and support inside GTAB	3 days	Thu 22/11/10	Sat 22/11/12	
224		Using Gantry crane to secure the air receiver/air filter/air dryer and undo the	3 days	Sat 22/11/12	Wed 22/11/16	
225		Relocated air receiver/air filter/air dryer outside GTAB and transport all equipment to designated storage area by crane lorry	3 days	Wed 22/11/16	Sat 22/11/19	
226		Tank / Drum Removal (Deaerator, LP Steam Drum, HP Steam Drum)	20 days	Thu 22/11/10	Wed 22/11/30	
227		Erect scaffold around Deaerator, HP Main Steam Drum, LP steam Drum, HP steam	3 days	Thu 22/11/10	Sat 22/11/12	
228		Removal cladding and insulation from drums, pipework and Deaerator	3 days	Sat 22/11/12	Wed 22/11/16	
229		Disconnect steam pipe from Drums, Deaer	3 days	Wed 22/11/16	Sat 22/11/19	
230		Remove HRSG Blow down tank silencer, HRSG silencer and S/T Flash Tank silencer	2 days	Sat 22/11/19	Mon 22/11/21	
231		Lifting all silence from GTAB by All Terrain Cranes T250 / T300	2 days	Tue 22/11/22	Wed 22/11/23	
232		Remove Drum enclosure partial to expose HP stream drum	3 days	Wed 22/11/23	Sat 22/11/26	
233		Secure HP stream drum by its lifting eye to All Terrain Cranes and undo anchor bolt	2 days	Sat 22/11/26	Tue 22/11/29	
234		Lifting the drum to lorry crane or suitable transportation and relocate to designated storage area	2 days	Tue 22/11/29	Wed 22/11/30	
235		Steam Turbine Removal - 89.3T	20 days	Thu 22/12/01	Wed 22/12/21	
236		Energize overhead crane inside GTAB and carry out Load test and get RPE approval	3 days	Thu 22/12/01	Sat 22/12/03	
237		Unbolt Steam turbine acoustic enclosure and hook up eye bolt with overhead crane	2 days	Sat 22/12/03	Tue 22/12/06	
238		Mobilize SPMT to GTAB unloading bay	2 days	Tue 22/12/06	Thu 22/12/08	
239		Lift the acoustic enclosure then unload to unloading area on top of SPMT and relocate to designated storage area	2 days	Thu 22/12/08	Fri 22/12/09	
240		Remove top half of Bearing support from Bearing No.1, and coupling connected to	2 days	Sat 22/12/10	Mon 22/12/12	

Project: KEM-HKE-OCGT_Reprov
Date: Wed 22/10/26

Task: Project Summary Manual Task Start-only Deadline

Split: Inactive Task Duration-only Finish-only Progress

Milestone: Inactive Milestone Manual Summary Rollup External Tasks Manual Progress

Summary: Inactive Summary Manual Summary External Milestone

Page 5


Re-provision of Open Cycle Gas Turbines at Lamna Power Station
 Monthly EM&A Report for November 2022

HKE LPS OCGT Re-Provision						
ID	Task	Task Name	Duration	Start	Finish	
241		Erect scaffold and dismantle connection between steam turbine and Condenser	3 days	Mon 22/12/12	Thu 22/12/15	
242		Undo the anchor bolt from stream turbine support frame	2 days	Thu 22/12/15	Sat 22/12/17	
243		Secure steam turbine by lifting eye to overhead crane and unload to SPMT	2 days	Sat 22/12/17	Mon 22/12/19	
244		Relocate steam turbine unit to temporary storage area or east side jetty	2 days	Tue 22/12/20	Wed 22/12/21	
245		Generator Removal - 193T	20 days	Wed 22/12/21	Wed 23/01/11	
246		Check if all electrical connections disconnected and de energized	1 day	Wed 22/12/21	Thu 22/12/22	
247		Temporary install platform to cover the opening after steam turbine dismantle	1 day	Thu 22/12/22	Fri 22/12/23	
248		Erect scaffold at the side of Generator and remove the Generator Cooling water pipe	1 day	Thu 22/12/22	Fri 22/12/23	
249		Hook up overhead crane lifting gear to the Generator enclosure	1 day	Fri 22/12/23	Sat 22/12/24	
250		Dismantle contactor, exciter, and brush	1 day	Sat 22/12/24	Mon 22/12/26	
251		Remove Bearing top cover from both side of Generator	1 day	Mon 22/12/26	Tue 22/12/27	
252		Remove the Hydrogen seal and oil deflector upper half on both end	1 day	Mon 22/12/26	Tue 22/12/27	
253		Dismantle Generator end cover on both side	1 day	Tue 22/12/27	Wed 22/12/28	
254		Install rotor jacking device on both sides to lift the rotor slightly	1 day	Wed 22/12/28	Wed 22/12/28	
255		Disassemble lower half Front and rear bearing	1 day	Thu 22/12/29	Thu 22/12/29	
256		Remove the Hydrogen seal and oil deflector lower half on both end	1 day	Thu 22/12/29	Fri 22/12/30	
257		Loose fan nozzle ring	1 day	Fri 22/12/30	Sat 22/12/31	
258		Setup rotor support on top of Self-Propelled Modular Transporter and	1 day	Sat 22/12/31	Mon 23/01/02	
259		Setup another rotor support at the North side of existing Generator	1 day	Mon 23/01/02	Tue 23/01/03	
260		Install Generator rotor extension rod to the flange near rear bearing	1 day	Tue 23/01/03	Wed 23/01/04	
261		Hook up lifting gear to the flange next to Front bearing and Rear bearing	1 day	Wed 23/01/04	Thu 23/01/05	
262		Remove the rotor from stator and transport to the temporary support on	1 day	Thu 23/01/05	Fri 23/01/06	
263		Remove lifting gear from Generator rotor extension rod and dismantle extension	1 day	Fri 23/01/06	Fri 23/01/06	
264		Re-attach lifting gear to the rotor and moving the rotor to the rotor support on SPMT then transport to designated	1 day	Sat 23/01/07	Sat 23/01/07	
265		Access stator inside and remove all conductors from stator slot for weight	1 day	Sat 23/01/07	Mon 23/01/09	

Project: KEM-HKE-OCGT_Reprov	Task		Project Summary		Start-only		Deadline	
Date: Wed 22/10/26	Split		Inactive Task		Finish-only		Progress	
	Milestone		Inactive Milestone		External Tasks		Manual Progress	
	Summary		Inactive Summary		External Milestone			

Page 6

Re-provision of Open Cycle Gas Turbines at Lamna Power Station
 Monthly EM&A Report for November 2022

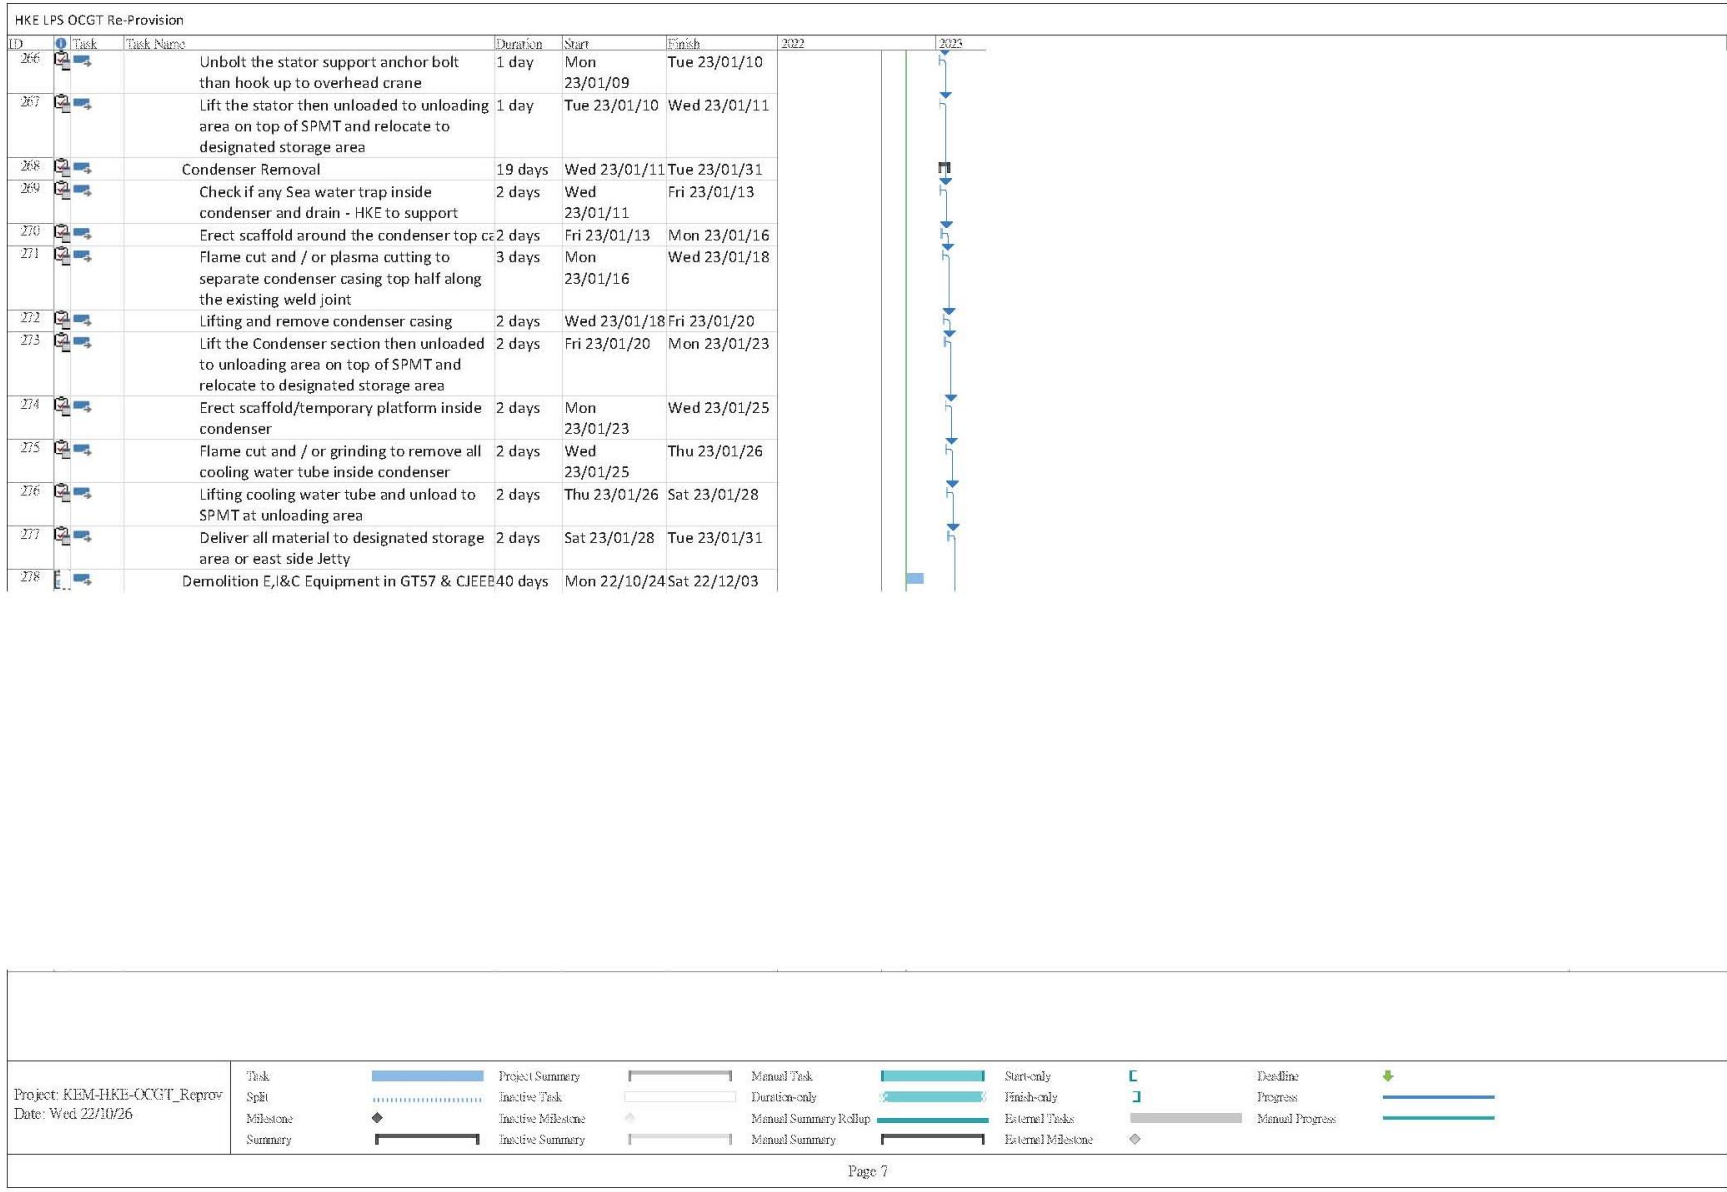

Appendix C Summary of EMIS

Table C.1 Mitigation Measures and their Implementation in the Reporting Month

EM&A Log Ref.	Recommended Mitigation Measures	Implementation Status
	AIR QUALITY	
EM&A: S2	Impervious sheet will be provided for skip hoist for material transport.	Complied
EM&A: S2	The area where dusty work takes place should be sprayed with water or a dust suppression chemical immediately prior to, during and immediately after dusty activities as far as practicable.	Complied
EM&A: S2	All dusty materials should be sprayed with water or a dust suppression chemical immediately prior to any loading, unloading or transfer operation.	Complied
EM&A: S2	Dropping heights for excavated materials should be controlled to a practical height to minimise the fugitive dust arising from unloading.	Complied
EM&A: S2	During transportation by truck, materials should not be loaded to a level higher than the side and tail boards, and should be dampened or covered before transport.	Complied
EM&A: S2	Temporary stockpiles of dusty materials will be either covered entirely by impervious sheets or sprayed with water to maintain the entire surface wet all the time.	Complied
EM&A: S2	Stockpiles of more than 20 bags of cement, dry pulverised fuel ash and dusty construction materials will be covered entirely by impervious sheeting sheltered on top and 3-sides.	No applicable at this stage
EM&A: S2	All exposed areas will be kept wet always to minimise dust emission.	Complied
EM&A: S2	Ultra-low-sulphur diesel (ULSD) will be used for all construction plant on-site, as defined as diesel fuel containing not more than 0.005% sulphur by weight) as stipulated in Environment, Transport and Works Bureau Technical Circular (ETWB-TC(W)) No 19/2005 on Environmental Management on Construction Sites.	Complied
EM&A: S2	The engine of the construction equipment during idling will be switched off.	Complied
EM&A: S2	Regular maintenance of construction equipment deployed on-site will be conducted to prevent black smoke emission.	Complied
EM&A: S2	All marine vessels fuelled in Hong Kong will operate using marine light diesel with Sulphur content lower than 0.05%.	Complied
EM&A: S2	NRMMs, e.g. mobile generator and air compressor, will comply with the prescribed emission standards with a proper label approved by EPD.	Complied
EM&A: S2	Electric power supply for on-site machinery will be provided as far as practicable for construction activities.	Complied
EM&A: S2	To ensure proper implementation of the recommended dust mitigation measures and good construction site practices during the decommissioning/ demolition/ construction phases, environmental site audits on weekly basis is recommended throughout the construction period.	Complied

EM&A Log Ref.	Recommended Mitigation Measures	Implementation Status
APCO	Every vehicle shall be washed to remove any dusty materials from its body and wheels before leaving construction site.	No applicable at this stage
	NOISE	
EM&A: S3	Machines and construction plant that may be in intermittent use should be shut down between work periods or should be throttled down to a minimum.	Complied
EM&A: S3	Only well-maintained construction plant should be operated on-site and should be serviced regularly.	Complied
NCO	Valid construction noise permits, if required, are available for inspection.	No applicable at this stage
NCO	Conditions of construction noise permits, if any, for the relevant part(s) of the works are implemented accordingly.	No applicable at this stage
NCO	Valid noise emission labels are fixed at air compressors and hand held percussive breakers.	Complied
	WATER QUALITY	
EM&A: S4	Wastewater, chemical waste and effluent from cleaning of existing OCGTs would be collected, stored for proper disposal by licensed contractor.	No applicable at this stage
EM&A: S4	Silt removal facilities such as silt traps or sedimentation facilities will be provided where necessary to remove silt particles from runoff to meet the requirements of the TM standard under the WPCO. The design of silt removal facilities will be based on the guidelines provided in ProPECC PN 1/94. All drainage facilities and erosion and sediment control structures will be inspected on a regular basis and maintained to confirm proper and efficient operation at all times and particularly during rainstorms. Deposited silt and grit will be removed regularly.	No applicable at this stage
EM&A: S4	Appropriate surface drainage will be designed and provided, where necessary.	No applicable at this stage
EM&A: S4	The precautions to be taken at any time of year when rainstorms are likely together with the actions to be taken when a rainstorm is imminent or forecasted and actions to be taken during or after rainstorms are summarised in Appendix A2 of ProPECC PN 1/94.	No applicable at this stage
EM&A: S4	Oil interceptors will be provided in the drainage system where necessary and regularly emptied to prevent the release of oil and grease into the stormwater drainage system after accidental spillages.	No applicable at this stage
EM&A: S4	Temporary and permanent drainage pipes and culverts provided to facilitate runoff discharge, if any, will be adequately designed for the controlled release of storm flows.	No applicable at this stage
EM&A: S4	The temporary diverted drainage, if any, will be reinstated to the original condition when the construction work has finished or when the temporary diversion is no longer required.	No applicable at this stage
EM&A: S4	Appropriate numbers of portable toilets shall be provided by a licensed contractor where necessary to serve the construction workers over the construction site to prevent direct disposal of sewage into the water environment.	Complied
EM&A: S4	To ensure proper implementation of the recommended water quality mitigation measures and good construction site practices during the decommissioning/ demolition, and construction phases, environmental	Complied

EM&A Log Ref.	Recommended Mitigation Measures	Implementation Status
	site audits on weekly basis is recommended throughout the construction period.	
	WASTE MANAGEMENT	
EM&A: S5	The contractor(s) must ensure that all the necessary waste disposal licences are obtained prior to the commencement of the decommissioning/ demolition and construction works.	Complied
EM&A: S5	The contractor will open a billing account with EPD in accordance with the Waste Disposal (Charges for Disposal of Construction Waste) Regulation for the payment of disposal charges.	Complied
EM&A: S5	A trip-ticket system will be established in accordance with DEVB TC(W) No. 6/2010 to monitor the reuse of surplus excavated materials off-site and disposal of construction waste and general refuse at transfer facilities/ landfills, and to control fly-tipping.	Complied
EM&A: S5	A WMP as stated in the PNAP ADV-19 for the amount of waste generated, recycled and disposed of (including the disposal sites) will be established and implemented during the construction phase as part of the Environmental Management Plan (EMP). The Contractor will be required to prepare the EMP and submits it to the Architect/ Engineer under the Contract for approval prior to implementation.	Complied
EM&A: S5	C&D materials will be segregated on-site into public fill and construction waste and stored in different containers or skips to facilitate reuse of the public fill and proper disposal of the construction waste. Specific areas of the Site will be designated for such segregation and storage if immediate use is not practicable. Prefabrication will be adopted as far as practicable to reduce the construction waste arisings.	Complied
EM&A: S5	The contractor(s) will register as a chemical waste producer with the EPD. Chemical waste will be handled in accordance with the Code of Practice on the Packaging, Handling and Storage of Chemical Wastes.	Complied
EM&A: S5	Containers used for storage of chemical wastes will: <ul style="list-style-type: none"> • Be suitable for the substance they are holding, resistant to corrosion, maintained in a good condition, and securely closed; • Have a capacity of less than 450 L unless the specifications have been approved by the EPD; and • Display a label in English and Chinese in accordance with instructions prescribed in Schedule 2 of the Regulations. 	Complied
EM&A: S5	The storage area for chemical wastes will: <ul style="list-style-type: none"> • Be clearly labelled and used solely for the storage of chemical waste; • Be enclosed on at least 3 sides; • Have an impermeable floor and bunding, of capacity to accommodate 110% of the volume of the largest container or 20% by volume of the chemical waste stored in that area, whichever is the greatest; • Have adequate ventilation; • Be covered to prevent rainfall entering (water collected within the bund must be tested and disposed of as chemical waste, if necessary); and • Be arranged so that incompatible materials are appropriately separated. 	Complied
EM&A: S5	Chemical waste will be disposed of: <ul style="list-style-type: none"> • Via a licensed chemical waste collector; and 	No applicable at this stage

EM&A Log Ref.	Recommended Mitigation Measures	Implementation Status
	<ul style="list-style-type: none"> To a facility licensed to receive chemical waste, such as the Chemical Waste Treatment Facility which also offers a chemical waste collection service and can supply the necessary storage containers. 	
EM&A: S5	General refuse will be stored in enclosed bins separately from construction and chemical wastes. The general refuse will be delivered separately from construction and chemical wastes for offsite disposal on a daily basis to reduce odour, pest and litter impacts.	Complied
EM&A: S5	Recycling bins will be provided at strategic locations within the Project Site to facilitate recovery of recyclable materials (including aluminium cans, waste papers, glass bottles and plastic bottles, etc.). Materials recovered will be sold for recycling.	No applicable at this stage
EM&A: S5	To avoid any odour and litter impact, appropriate number of portable toilets will be provided for workers on-site where appropriate.	No applicable at this stage
EM&A: S5	At the commencement of the decommissioning/demolition and construction works, training will be provided to workers on the concepts of site cleanliness and on appropriate waste management procedures, including waste reduction, reuse and recycling.	Complied
EM&A: S5	General refuse and non-recyclables will be stored in enclosed bins and collected by existing waste management contractor at Lamma Power Station for disposal at the landfills on a daily basis for avoidance of pest and odour nuisance.	Complied
EM&A: S5	Recycling bins for recyclable materials (including aluminium cans, waste papers, glass bottles and plastic bottles) will be placed at the site office and transported off- site for recycling on a regular basis.	Complied
EM&A: S5	It is recommended that weekly audits of the waste management practices be carried out during the decommissioning/demolition, and construction phases to determine if wastes are being managed in accordance with the recommended good site practices and WMP. The audits will investigate all aspects of waste management including waste generation, storage, handling, recycling, transportation and disposal.	Complied
LAND CONTAMINATION		
EM&A: S6	During the demolition stage, a Land Contamination Specialist shall oversee the removal / demolition activities and record any new visual signs of potential contamination such as oil leakage or oil stains. The Land Contamination Specialist shall also review the need of additional sampling to capture potential contamination observed during the demolition stage.	Complied
EM&A: S6	SI and sampling shall be carried out when the proposed sampling locations are available after the demolition stage.	No applicable at this stage
EM&A: S6	Soil and groundwater sampling works will be supervised by a Land Contamination Specialist.	No applicable at this stage
EM&A: S6	Prior to commencement of demolition works in the Project site, the leftover diesel or other petroleum products in the equipment to be demolished shall be removed as much as possible. The removed diesel or other petroleum products will be reused as far as practicable. The removed diesel and other petroleum products, which cannot be reused are considered as chemical waste and are controlled under the Waste Disposal (Chemical Waste)(General) Regulation. The demolition contractor who will generate the chemical waste or cause it to be	Complied

EM&A Log Ref.	Recommended Mitigation Measures	Implementation Status
	produced should register with the EPD as a chemical waste producer. Removed diesel and petroleum products shall be labelled and stored in accordance with the requirement stipulated in the Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes issued by EPD. The removed petrol and petroleum products are required to be collected by licensed chemical waste collector for disposal. Trip tickets system shall be implemented during the collection and disposal of removed petrol and diesel.	
EM&A: S6	During demolition and construction phases, the following good housekeeping practices shall be implemented to ensure that risk of ground contamination as a result of oil spills or leaks is kept to a practical minimum: <ul style="list-style-type: none"> • Regular visual inspections to detect any early signs of fuel leakage prior to demolition; • Provision of impermeable lining or absorbent materials to contain leaks; • Provision of secondary containment for the temporary storage of removed diesel or petroleum products, demolished structures and pipes; and • Provision of spill control materials and equipment 	Complied
EM&A: S6	To ensure proper implementation of the good housekeeping practices, weekly site inspections should be carried out during the decommissioning/demolition, and construction phases of the Project.	Complied

Remarks:

APCO: Air Pollution Control Ordinance
 EM&A: EM&A Manual
 NCO: Noise Control Ordinance

Appendix D Summary of Site Audit Findings or Recommendation

Civil contractor

Dates of Inspection: 03/11/2022, 08/11/2022, 18/11/2022, 22/11/2022 and 29/11/2022

Summary of Findings or Recommendation

Air Quality

- No environmental deficiency identified.

Noise

- No environmental deficiency identified.

Water Quality

- No environmental deficiency identified.

Waste Management

- No environmental deficiency identified.

Land Contamination

- No environmental deficiency identified.

E&M contractor

Dates of Inspection: 04/11/2022, 11/11/2022, 18/11/2022 and 22/11/2022

Summary of Findings or Recommendation

Air Quality

- No environmental deficiency identified.

Noise

- No environmental deficiency identified.

Water Quality

- No environmental deficiency identified.

Waste Management

- No environmental deficiency identified.

Land Contamination

- No environmental deficiency identified.

Appendix E

Monthly Waste Flow Table for November 2022

Appendix E1 Monthly Waste Flow Table for November 2022 (Civil Contractor)

Monthly Waste Flow Table for November 2022

Project: Civil Works for Re-Provision of Open Cycle Gas Turbine at Lamna Power Station
 Contractor: Paul Y. Construction Company, Limited
 Record by: Ben Lam
 Year of Record: 2022

MM.YYYY	Actual Quantities of Inert C&D Materials Generated Monthly							Actual Quantities of Non-inert C&D Materials Generated Monthly							
	Excavated Materials			Non-excavated Materials				Metals (steel bar / metal strip) (1)	Metals (aluminum can) (2)	Paper / cardboard packaging (3)	Plastics (1)(4)	Chemical waste (wasted lubricant oil/oil container)	Chemical waste (wasted lubricant oil/oil container)	Other, e.g. general refuse	
	Disposed in Public Fill	Disposed in Sorting Facilities	Others (e.g. Reused in the Contract / Other Projects)	Broken Concrete or Construction Waste Collected by Recycled Company	Reused in the Contract	Reused in other Projects	Disposed in Public Fill								Disposed in Sorting Facilities
(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000L)	(in '000kg)	(in '000kg)	
Jul 2022	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Aug 2022	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Sep 2022	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Oct 2022	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Nov 2022	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Total	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Total Inert C&D Waste Materials Generated	Non-inert C&D Materials		
	C&D Materials Recycled	C&D Waste Disposed of at Landfill	Chemical Waste
0.00 tonnes	0.00 tonnes	0.00 tonnes	0.00 tonnes

- Where (A) Inert C&D materials include bricks, concrete, building debris, rubble and excavated spoil. In total, 0.00 tonnes of inert C&D material were generated from the Project, of which 0.00 tonnes were reused in this and other contracts, and the remaining 0.00 tonnes were disposed as public fill to Fill Banks / Sorting Facilities.
- (b) Non-inert C&D materials (construction wastes) include metals, paper / cardboard packaging waste, plastics and other wastes such as general refuse. Metals generated from the Project were grouped into construction wastes as the materials were not disposed of with others at the public fill.
- (c) 0 kg of metals, 0 kg of papers/ cardboard packing and 0 kg of plastics were sent to recyclers for recycling during the reporting period.
- (d) Construction wastes other than metals, paper/cardboard packaging, plastics and chemicals were disposed of at Landfill.

Notes:

- (1) metal, paper & plastic were collected by recycler
- (2) The performance target of waste recycling are specified in the Contract.
- (3) The waste flow table shall also include C&D materials that are specified in the Contract to be imported for use at the Site.
- (4) Plastics refer to plastic bottles/ containers, plastic/ foam from packaging material.
- (5) Broken concrete for recycling into aggregates.
- (6) Disposal of inert waste to public fill or sorting facilities will NOT be considered as recycled waste.

Appendix E2 Monthly Waste Flow Table for November 2022 (E&M Contractor)

Monthly Waste Flow Table for November 2022

Project: C/N 22 23001 Lamma Re-provision of OCGT Demolition & Erection Work
 Contractor: Kum Shing
 Record by: Xavier Chan
 Year of Record: 2022

MM.YYYY	Actual Quantities of Inert C&D Materials Generated Monthly								Actual Quantities of Non-inert C&D Materials Generated Monthly						
	Excavated Materials			Non-excavated Materials					Metals (steel bar/ metal strip)	Metals (aluminum can)	Paper / cardboard packaging	Plastics	Chemical waste (wasted lubricant oil/oil container)	Chemical waste (wasted lubricant oil/oil container)	Other, e.g. general refuse
	Disposed in Public Fill	Disposed in Sorting Facilities	Others (e.g. Reused in the Contract / Other Projects)	Broken Concrete or Construction Waste Collected by Recycled Company	Reused in the Contract	Reused in other Projects	Disposed in Public Fill	Disposed in Sorting Facilities							
(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000L)	(in '000kg)	(in '000kg)	
Oct 2022	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Nov 2022	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Total	0	0	0	0	0	0	0	0	0	0	0	0	0	0	

Total Inert C&D Waste Materials Generated	Non-inert C&D Materials		
	C&D Materials Recycled	C&D Waste Disposed of at	Chemical Waste
0.00 tonnes	0.00 tonnes	0.00 tonnes	0.00 tonnes

Where

- (A) Inert C&D materials include bricks, concrete, building debris, rubble and excavated spoil. In total, 0.00 tonnes of inert C&D material were generated from the Project, of which 0.00 tonnes were reused in this and other contracts, and the remaining 0.00 tonnes were disposed as public fill to Fill Banks / Sorting Facilities.
- (B) Non-inert C&D materials (construction wastes) include metals, paper / cardboard packaging waste, plastics and other wastes such as general refuse. Metals generated from the Project were grouped into construction wastes as the materials were not disposed of with others at the public fill.
- (C) 0 kg of metals, 0 kg of papers/ cardboard packing and 0 kg of plastics were sent to recyclers for recycling during the reporting period.
- (D) Construction wastes other than metals, paper/cardboard packaging, plastics and chemicals were disposed of at Landfill.

Notes:

- (1) metal, paper & plastic were collected by recycler
- (2) The performance target of waste recycling are specified in the Contract.
- (3) The waste flow table shall also include C&D materials that are specified in the Contract to be imported for use at the Site.
- (4) Plastics refer to plastic bottles/ containers, plastic/ foam from packaging material.
- (5) Broken concrete for recycling into aggregates.
- (6) Disposal of inert waste to public fill or sorting facilities will NOT be considered as recycled waste.