

JOB NO.: TCS00757/15

(October to December 2015)

Date

DSD CONTRACT NO. DC/2013/09 –
ADVANCE WORKS FOR SHEK WU HUI SEWAGE
TREATMENT WORKS – FURTHER EXPANSION PHASE 1A
AND SEWERAGE WORKS AT PING CHE ROAd

1<sup>ST</sup> QUARTERLY ENVIRONMENTAL MONITORING AND AUDIT (EM&A) SUMMARY REPORT (OCTOBER TO DECEMBER 2015)

PREPARED FOR

Reference No.

TSUN YIP WATERWORKS CONSTRUCTION CO LTD

		-1 /	<i>J</i>
2 March 2016	TCS00757/15/600/R0025v2	Aula	Brown

Prepared By

Nicola Hon Tam Tak Wing (Environmental Consultant) (Environmental Team Leader)

Certified By

Version	Date	Remarks
1	22 February 2016	First Submission
2	2 March 2016	Amended against the IEC's comments on 24 February 2016



Drainage Services Department 44/F., Revenue Tower 5 Gloucester Road

Wan Chai Hong Kong Your reference:

THYDODOO

Our reference:

HKDSD201/50/103419

Date:

2 March 2016

Attention: Mr Michael Leung

BY EMAIL & POST (email: hkleung@dsd.gov.hk)

Agreement No.: SP 01/2015

Environmental Monitoring and Audit for

Advance Works for Shek Wu Hui Sewage Treatment Works – Further Expansion Phase 1A

Quarterly EM&A Report for October to December 2015

We refer to emails of 22 February 2016 and 2 March 2016 attaching a Quarterly EM&A Report for October to December 2015 for the captioned project prepared by the Environmental Team (ET).

We have no further comment and hereby verify the Quarterly EM&A Report.

Please do not hesitate to contact the undersigned at 2618 2836 should you have any queries.

Yours faithfully ANEWR CONSULTING LIMITED

Independent Environmental Checker

LYMA/LCYG/chnb

cc Mr Ken Wong – Tsun Yip (email: kenwong@tsunyip.hk)
Ms Nicola Hon – AUES (email: nicolahon@fordbusiness.com)

Email: info@anewr.com Web: www.anewr.com



Phase 1A and Sewerage Works at Ping Che Road

1st Quarterly Environmental Monitoring and Audit (EM&A) Summary Report

(October to December 2015)



#### **EXECUTIVE SUMMARY**

ES.01 This is the 1<sup>st</sup> Quarterly Environmental Monitoring and Audit Summary Report for DSD Contract No. DC/2013/09 – Advance Works for Shek Wu Hui Sewage Treatment Works – Further Expansion Phase 1A and Sewerage Works at Ping Che Road (hereinafter referred as "the Contract") under Environmental Permit number FEP-01/474/2013, covering the period from 1 October to 31 December 2015 (the Reporting Period).

### **ENVIRONMENTAL MONITORING AND AUDIT ACTIVITIES**

ES.02 Environmental monitoring activities under the EM&A program in this Reporting Period are summarized in the following table.

Issues	<b>Environmental Monitoring Parameters / Inspection</b>	Occasions
Air Quality	1-hour TSP	90
All Quality	24-hour TSP	34
Construction Noise	$L_{Aeq(30min)}$ Daytime	28
Inspection / Audit	ET Regular Environmental Site Inspection	13
hispection / Audit	IEC Monthly Environmental Site Audit	3

# BREACH OF ACTION AND LIMIT (A/L) LEVELS

ES.03 In the Reporting Period, no exceedance of air quality and construction noise monitoring were recorded. No Notification of Exceedance (NOE) was, therefore, issued. The statistics of environmental exceedance, NOE issued and investigation of exceedance are summarized in the following table.

Environmental	Monitoring	Action Level	Limit Level	Event & Action		
Issues	Parameters Parameters			NOE Issued	Investigation	Corrective Actions
Air Quality	1-hour TSP	0	0	0	-	-
All Quality	24-hour TSP	0	0	0	-	-
Construction Noise	$L_{Aeq(30min)}$	0	0	0	-	-

Note: NOE – Notification of Exceedance

## **SITE INSPECTION**

ES.04 In the Reporting Period, 13 events of joint site inspection to evaluate the site environmental performance by the RE, ET and the Contractor were carried out. No non-compliance was noted.

# **ENVIRONMENTAL COMPLAINT**

ES.05 No environmental complaint was recorded or received in this Reporting Period. The statistics of environmental complaint are summarized in the following table.

# NOTIFICATION OF SUMMONS AND SUCCESSFUL PROSECUTIONS

ES.06 No environmental summons or successful prosecutions were recorded in this Reporting Period. The statistics of environmental complaint are summarized in the following tables.

# REPORTING CHANGE

ES.07 No reporting changes were made in the Reporting Period.

## **FUTURE KEY ISSUES**

ES.08 During dry season, special attention should be paid to provide air quality mitigation measures for suppression of construction dust including wheel wash facilities, watering of haul roads and covering of dusty materials with tarpaulin sheet, etc. Moreover, mitigation measures to avoid ingress of surface runoff into nearby water bodies from the construction site should be properly maintained.




(October to December 2015)

# **Table of Contents**

1	INTRODUCTION  1.1 PROJECT BACKGROUND  1.2 REPORT STRUCTURE	1 1 2
2	PROJECT ORGANIZATION AND CONSTRUCTION PROGRESS 2.1 PROJECT ORGANIZATION AND MANAGEMENT STRUCTURE 2.2 CONSTRUCTION PROGRESS 2.3 SUMMARY OF ENVIRONMENTAL SUBMISSIONS	3 3 3 3 3
3	SUMMARY OF IMPACT MONITORING REQUIREMENT 3.1 GENERAL 3.2 MONITORING PARAMETERS 3.3 MONITORING LOCATIONS 3.4 MONITORING FREQUENCY AND PERIOD 3.5 MONITORING EQUIPMENT 3.6 DETERMINATION OF ACTION/LIMIT (A/L) LEVELS 3.7 EVENT ACTION PLAN	4 4 4 4 5 6 6
4	MONITORING METHDOLOGY 4.1 AIR QUALITY MONITORING 4.2 CONSTRUCTION NOISE MONITORING 4.3 DATA MANAGEMENT AND DATA QA/QC CONTROL	7 7 8 8
5	<ul> <li>IMPACT MONITORING RESULTS</li> <li>5.1 GENERAL</li> <li>5.2 RESULTS OF AIR QUALITY MONITORING</li> <li>5.3 RESULTS OF CONSTRUCTION NOISE MONITORING</li> <li>5.4 CONCLUSION</li> </ul>	<b>9</b> 9 9 9
6	WASTE MANAGEMENT 6.1 GENERAL WASTE MANAGEMENT 6.2 RECORDS OF WASTE QUANTITIES	10 10 10
7	SITE INSPECTION  7.1 REQUIREMENTS  7.2 FINDINGS / DEFICIENCIES DURING THE REPORTING PERIOD	<b>11</b> 11 11
8	ENVIRONMENTAL COMPLAINT AND NON-COMPLIANCE 8.1 ENVIRONMENTAL COMPLAINT, SUMMONS AND PROSECUTION	<b>12</b> 12
9	IMPLEMENTATION STATUS OF MITIGATION MEASURES 9.1 GENERAL REQUIREMENTS	<b>13</b> 13
10	CONCLUSIONS AND RECOMMENTATIONS 10.1 CONCLUSIONS 10.2 RECOMMENDATIONS	<b>14</b> 14 14







# **LIST OF TABLES**

TABLE 2-1	STATUS OF ENVIRONMENTAL LICENSES AND PERMITS
TABLE 3-1	SUMMARY OF EM&A REQUIREMENTS
TABLE 3-2	PROPOSED AIR QUALITY AND CONSTRUCTION NOISE MONITORING LOCATIONS
TABLE 3-3	AIR QUALITY MONITORING EQUIPMENT
TABLE 3-4	CONSTRUCTION NOISE MONITORING EQUIPMENT
TABLE 3-5	ACTION AND LIMIT LEVELS FOR 24-HR TSP AND 1-HR TSP AIR QUALITY, $\mu g/m^3$
TABLE 3-6	ACTION AND LIMIT LEVELS FOR CONSTRUCTION NOISE
TABLE 5-1	SUMMARY OF AIR QUALITY MONITORING RESULTS
TABLE 5-2	SUMMARY OF NOISE MONITORING RESULTS
TABLE 6-1	SUMMARY OF QUANTITIES OF INERT C&D MATERIALS FOR THE PROJECT
TABLE 6-2	SUMMARY OF QUANTITIES OF C&D WASTES FOR THE PROJECT
TABLE 7-1	SITE OBSERVATIONS
TABLE 8-1	STATISTICAL SUMMARY OF ENVIRONMENTAL COMPLAINTS
TABLE 8-2	STATISTICAL SUMMARY OF ENVIRONMENTAL SUMMONS
TABLE 8-3	STATISTICAL SUMMARY OF ENVIRONMENTAL PROSECUTION
TABLE 9-1	Environmental Mitigation Measures

# **LIST OF APPENDICES**

APPENDIX A	GENERAL LAYOUT OF ADVANCE WORKS AND MAIN WORKS OF SWHSTW FURTHER EXPANSION PHASE 1A		
APPENDIX B	LAYOUT PLAN OF THE CONTRACT		
APPENDIX C	ORGANIZATION STRUCTURE AND CONTACT DETAILS OF RELEVANT PARTIES		
APPENDIX D	MASTER CONSTRUCTION PROGRAM OF THE CONTRACT		
APPENDIX E	PROPOSED MONITORING LOCATIONS		
APPENDIX F	EVENT ACTION PLAN		
APPENDIX G	GRAPHICAL PLOTS		
APPENDIX H	METEOROLOGICAL INFORMATION		
APPENDIX I	MONTHLY SUMMARY WASTE FLOW TABLE		
APPENDIX J	IMPLEMENTATION SCHEDULE FOR ENVIRONMENTAL MITIGATION MEASURES (ISEMM)		



1

#### INTRODUCTION

# 1.1 PROJECT BACKGROUND

- 1.1.1 The existing Shek Wu Hui Sewage Treatment Works (hereafter referred as "SWHSTW") with secondary level treatment to sewage collected from Sheung Shui, Fanling and adjacent areas is operated and maintained by Drainage Services Department (hereafter referred as "DSD"). Based on the preliminary design of the Project, the scope of works for the Project comprises the following major components:
  - (a) Demolition of the existing Inlet Works and construction of the new Inlet Works, including inlet pumping station, screening and degritting facilities;
  - (b) Demolition of 4 existing circular Primary Sedimentation Tanks (PSTs) and construction of new rectangular PSTs;
  - (c) Construction of new pre-membrane screens;
  - (d) Modification of existing Bioreactor (BR) 1 and 2 to suit the proposed membrane bioreactor (MBR) process;
  - (e) Construction of a new standby Bioreactor;
  - (f) Demolition of 4 existing circular Final Sedimentation Tanks (FSTs) and construction of new Membrane Tanks and Membrane Facility Building;
  - (g) Reconstruction of sludge treatment facilities, including thickening, anaerobic digestion, biogas handling, sludge holding and dewatering facilities; and
  - (h) Other ancillary works.
- 1.1.2 According to the Project implementation programme, the construction of most of the above proposed works (hereinafter referred to as "Main Works") will be commencement in 2016 and completion in 2022. Furthermore, Advance Works as part of the above proposed works will carry out before Main Works commencement. The Advance Works will be commencement in third quarter of 2015 and comprise the following major components:
  - (a) Modification of BR1, through upgrading of electrical and mechanical (E&M) equipment and minor civil works, to suit the proposed MBR process;
  - (b) Demolition of FSTs 1 and 2 and construction of Membrane Tanks and the first phase of Membrane Facility Building; and
  - (c) Tree felling and transplanting, to facilitate timely construction of the new Inlet Works during the implementation of Main Works (under review).
- 1.1.3 The general layout of Advance Works and Main Works of SWHSTW Further Expansion Phase 1A show in *Appendix A*. Subsequent to Further Expansion Phase 1A, the SWHSTW will be further expanded under separate projects (namely Further Expansion Phase 1B and Phase 2).
- 1.1.4 In July 2015, Tsun Yip Waterworks Construction Co Ltd (hereinafter referred as "Tsun Yip" or "the Contractor") has awarded the DSD Contract No. DC/2013/09 Advance Works for Shek Wu Hui Sewage Treatment Works Further Expansion Phase 1A and Sewerage Works at Ping Che Road (hereinafter referred as "the Contract"). The Contract is the Advance Works for Shek Wu Hui Sewage Treatment Works as part of SWHSTW Further Expansion which is a Designated Project under Environmental Permit number FEP-01/474/2013 (hereinafter referred as "the FEP-01/474/2013" or "the EP").
- 1.1.5 The works under the Contract at Shek Wu Hui Sewage Treatment Works will be included the conversion of one existing bioreactor and two existing final sedimentation tanks into one membrane bioreactor. Moreover, construction of about 1.5 kilometres length of sewers at Ping Che Road and other ancillary works will be undertaken. The works of Contract are scheduled to be conduct about 25 months. Layout plan of the Contract is shown in *Appendix B*.
- 1.1.6 Action-United Environmental Services & Consulting (hereinafter referred as "AUES") was



appointed by the Contractor as an Environmental Team (hereinafter referred as "the ET") to implement the relevant EM&A program in accordance with the Updated EM&A Manual, as well as the associated duties.

- 1.1.7 As part of the EM&A program, baseline monitoring is required to determine the ambient environmental conditions. Hence baseline monitoring including air quality and noise were carried out between 28 August 2015 and 12 September 2015 at the proposed locations before construction work commencement. The "Baseline Monitoring Report (TCS00757/15/600/R0014 Version 2)" had submitted to EPD by the DSD before commencement of major construction works and approved by the IEC on 24 September 2015. Further to Tsun Yip's instructions, the EM&A program was commenced on 1 October 2015 and the monitoring schedule had been issued to relevant parties on 29 September 2015.
- 1.1.8 This is the 1<sup>st</sup> Quarterly EM&A Report for the Project presenting the monitoring results and inspection findings for the reporting period from 1 October to 31 December 2015.

# 1.2 REPORT STRUCTURE

1.2.1 The Quarterly Environmental Monitoring and Audit (EM&A) Summary Report is structured into the following sections:-

SECTION 1	Introduction
SECTION 2	PROJECT ORGANIZATION AND CONSTRUCTION PROGRESS
SECTION 3	SUMMARY OF MONITORING REQUIREMENTS
SECTION 4	IMPACT MONITORING RESULTS
SECTION 5	WASTE MANAGEMENT
SECTION 6	SITE INSPECTIONS
SECTION 7	ENVIRONMENTAL COMPLAINTS AND NON-COMPLIANCE
SECTION 8	IMPLEMENTATION STATUES OF MITIGATION MEASURES
SECTION 9	IMPACT FORECAST
SECTION 10	CONCLUSIONS AND RECOMMENDATION

Advance Works for Shek Wu Hui Sewage Treatment Works - Further Expansion Phase 1A and Sewerage Works at Ping Che Road



1st Quarterly Environmental Monitoring and Audit (EM&A) Summary Report (October to December 2015)

#### 2 PROJECT ORGANIZATION AND CONSTRUCTION PROGRESS

#### 2.1 PROJECT ORGANIZATION AND MANAGEMENT STRUCTURE

2.1.1 Organization structure and contact details of relevant parties with respect to on-site environmental management are shown in *Appendix C*.

#### 2.2 **CONSTRUCTION PROGRESS**

- 2.1.2 Master Construction Program of the Contract is enclosed in *Appendix D* and the major construction activities undertaken in this Reporting Period are illustrated in Appendix B and listed below:-
  - Install Sheet Piles and Strutting for Membrance Facilitates and Tanks;
  - Demolition of Methanol Storage Tanks;
  - demolition of final sedimentation tank;
  - backfilling of void at final sedimentation tank;
  - Installation of sheetpile for excavation of trench for construction of DN1400 BR2 effluent pipe,
  - Removal of concrete debris after demolition of final sedimentation tank;
  - Commencement of drilling of ground investigation; and
  - Pipe laying of DN150 SAS pipe.


#### 2.3 SUMMARY OF ENVIRONMENTAL SUBMISSIONS

2.1.3 Summary of the relevant permits, licences, and/or notifications on environmental protection for this Project in this Reporting Period is presented in *Table 2-1*.

**Table 2-1 Status of Environmental Licenses and Permits** 

Item	Description	License/Permit Status
1	Air Pollution Control (Construction Dust) Regulation	Notified EPD on 30 July 2015
2	Chemical waste Producer Registration	Application date: 19/08/2015
	(WPN: 5213-624-T3148-04)	Date approved: 18/9/2015
3	Water Pollution Control Ordinance	Application date: 19/08/2015
	(Discharge License: WT00022503-2015)	Date approved: 18/9/2015
4	Billing Account for Disposal of Construction Waste	Granted on 02/09/2015
	(Account Number: 7022898)	

- 2.1.4 In accordance with the Further EP No. FEP-01/474/2013 Condition 2.3, an Updated Environmental Monitoring and Audit (EM&A) Manual (TCS00757/15/600/R0012v3) which certified by the Environmental Team (ET) Leader and verified by the Independent Environmental Checker (IEC), has submitted to DSD and EPD endorsement.
- 2.1.5 Baseline Monitoring Report (TCS00757/15/600/R0014v2) as certified by the ETL and verified by the IEC was submitted to the EPD on 24 September 2015 for endorsement.





#### 3 SUMMARY OF IMPACT MONITORING REQUIREMENT

#### 3.1 GENERAL

3.1.1 The Environmental Monitoring and Audit requirements are set out in the Updated EM&A manual. Environmental issues such as air quality and construction noise were identified as the key issues during the construction phase of Advance Works of the Project. A summary of EM&A programme of construction phase are presented in the sub-sections below.

#### 3.2 MONITORING PARAMETERS

- 3.2.1 The EM&A programmes of construction phase shall cover the following environmental issues:
  - Air quality; and
  - Construction noise
- 3.2.2 A summary of the monitoring parameters is presented in *Table 3-1* below

Table 3-1 **Summary of EM&A Requirements** 

Environmental Issue	Parameters		
Air Quality	<ul> <li>1-hour TSP by Real-Time Portable Dust Meter; and</li> <li>24-hour TSP by High Volume Air Sampler.</li> </ul>		
Construction Noise	<ul> <li>Leq<sub>(30min)</sub> during normal working hours; and</li> <li>Leq<sub>(15min)</sub> for the construction works undertaken in Restricted Hours, i necessary.</li> </ul>		

#### 3.3 MONITORING LOCATIONS

3.3.1 According to the Updated EM&A Manual of Advance Works which submitted to EPD on 25 August 2015, three air quality sensitive receivers and two construction noise sensitive receivers are proposed to monitor the environmental performance of the Contract. The proposed monitoring locations are summarized in *Table 3-2* and shown in *Appendix E*.

Table 3-2 **Proposed Air Quality and Construction Noise Monitoring Locations** 

Aspect	Station ID	Location	Parameter
	AM1	No. 31 Wai Loi Tsuen	1- hour and 24- hour TSP
Air Quality	AM2	Fu Tei Au	1- hour
	AM2a	RE's Site Office	24- hour TSP
Noise	NM1	No. 31 Wai Loi Tsuen	L <sub>eq(30min)</sub>
TVOISC	NM2	Fu Tei Au	$L_{eq(30min)}$

#### 3.4 MONITORING FREQUENCY AND PERIOD

3.4.1 The requirements of baseline monitoring are stipulated in Sections 2.1.7 and 3.2.5 of the Updated EM&A Manual and presented as follows.

# Air Quality Monitoring

- 3.4.2 Monitoring frequency for air quality baseline monitoring is as follows:
  - 1-Hour TSP 3 sets of 1-hour TSP monitoring shall be carried out once in every
  - 24-Hour TSP 24-hour shall be carried out once in every six days.

# Noise Monitoring

3.4.3 Construction noise monitoring should be carried out at the designated monitoring station when there are Project-related construction activities being undertaken within a radius of 300m from the monitoring stations. The monitoring frequency should depend on the scale of the



construction activities. An initial guide on the monitoring is to obtain one set of 30-minute measurement at each station between 0700 and 1900 hours on normal weekdays at a frequency of once a week when construction activities are underway.

3.4.4 If construction works are extended to include works during the hours of 1900 - 0700, additional weekly impact monitoring shall be carried out during evening and night-time works. Applicable permits under NCO shall be obtained by the Contractor.

### 3.5 MONITORING EQUIPMENT

## Air Quality Monitoring

- 3.5.1 The 24-hour and 1-hour TSP levels shall be measured by following the standard high volume sampling method as set out in the *Title 40 of the Code of Federal Regulations, Chapter 1 (Part 50), Appendix B.* If the ET proposes to use a direct reading dust meter to measure 1-hour TSP levels, it shall submit sufficient information to the IEC to approve.
- 3.5.2 The filter paper of 24-hour TSP measurement shall be determined by HOKLAS accredited laboratory.
- 3.5.3 All equipment as used air quality monitoring is listed in *Table 3-3*.

Table 3-3 Air Quality Monitoring Equipment

Equipment	Model		
24-Hr TSP			
High Volume Air Sampler	TISCH High Volume Air Sampler, HVS Model TE-5170		
Calibration Kit	TISCH Model TE-5028A		
1-Hour TSP			
Portable Dust Meter	Sibata LD-3 Laser Dust monitor Particle Mass Profiler &		
Fortable Dust Meter	Counter		

### Wind Data Monitoring Equipment

3.5.4 According to the Updated EM&A Manual Sections 2.1.3.8, alternative methods to obtain representative wind data was proposed by the ET. Meteorological information as extracted from "the Hong Kong Observatory Ta Kwu Ling Station" is alternative method to obtain representative wind data. For Ta Kwu Ling Station, it is located nearby the Project site. Moreover, this station is situated the sea level above 15mPD. The station's wind data monitoring equipment is set above the existing ground ten meters in compliance with the general setting up requirement. Furthermore, this station also can be to provide the humidity, rainfall, and air pressure and temperature etc. meteorological information. In Hong Kong of a lot development projects, weather information extracted from Hong Kong Observatory is common alternative method if weather station installation not allowed.

### Noise Monitoring

- 3.5.5 Sound level meter in compliance with the International Electrotechnical Commission Publications 651: 1979 (Type 1) and 804: 1985 (Type 1) specifications shall be used for carrying out the noise monitoring. The sound level meter shall be checked using an acoustic calibrator. The wind speed shall be checked with a portable wind speed meter capable of measuring the wind speed in m s-1.
- 3.5.6 Noise monitoring equipment to be used for baseline monitoring is listed in *Table 3-4*.

**Table 3-4** Construction Noise Monitoring Equipment

Equipment	Model
Integrating Sound Level Meter	B&K Type 2238 or Rion NL-14
Calibrator	Rion NC-73 / B&K Type 4231



Equipment	Model
Portable Wind Speed Indicator	Testo Anemometer

3.5.7 Sound level meters listed above comply with the *International Electrotechnical Commission Publications 651: 1979 (Type 1)* and *804: 1985 (Type 1)* specifications, as recommended in TM issued under the NCO. The acoustic calibrator and sound level meter to be used in the baseline monitoring will be calibrated yearly.

# 3.6 DETERMINATION OF ACTION/LIMIT (A/L) LEVELS

3.6.1 According to the baseline monitoring results and the Updating Environmental Monitoring and Audit Manual stipulation, the air quality and construction noise criteria were set up, namely Action and Limit levels are listed in *Tables 3-5 & 3-6* as below.

Table 3-5 Action and Limit Levels for 24-Hr TSP and 1-Hr TSP Air Quality, µg m<sup>-3</sup>

Monitoring Stations	Action Le	Action Level (μg/m³)		vel (μg/m³)
Monitoring Stations	1-hour	24-hour	1-hour	24-hour
AM1	286	147	500	260
AM2	276	NA	500	NA
AM2a	NA	155	NA	260

**Table 3-6** Action and Limit Levels for Construction Noise

<b>Monitoring Stations</b>	Action Level	Limit Level in dB(A)			
Time P	Time Period: 0700-1900 hours on normal weekdays				
NM1 and NM2	When one documented complaint is received	>75* dB(A)			

*Note:* (\*) *Reduces to 70 dB(A) for schools and 65 dB(A) during the school examination periods.* 

# 3.7 EVENT ACTION PLAN

3.7.1 If non-compliance or exceedance of the Action/Limit Levels is occurred, actions shall be taken in accordance with the Event Action Plan in *Appendix F*.



# 4 MONITORING METHDOLOGY

# 4.1 **AIR QUALITY MONITORING**

# **Monitoring Location**

4.1.1 The detailed information of air quality monitoring stations referred to Table 3-2 and the graphical plot of monitoring locations shown in Appendix E in this report.

# **Monitoring Equipment**

4.1.2 All the monitoring equipment to be used in the EM&A program as listed in *Table 3-3* has been agreed with the IEC.


# **Monitoring Procedures**

### 1-hour TSP

- 4.1.3 The 1-hour TSP monitor, a Sibata LD-3 Laser Dust monitor Particle Mass Profiler & Counter was used for baseline monitoring, which is a portable, battery-operated laser photometer. The 1-hour TSP meter provides a real time 1-hour TSP measurement based on 90<sup>0</sup> light scattering. The 1-hour TSP monitor consisted of the following:
  - a. A pump to draw sample aerosol through the optic chamber where TSP is measured;
  - b. A sheath air system to isolate the aerosol in the chamber to keep the optics clean for maximum reliability; and
  - c. A built-in data logger compatible with Windows based program to facilitate data collection, analysis and reporting.
- 4.1.4 The 1-hour TSP meter used is within the valid period, calibrated by the manufacturer prior to purchasing. Zero response of the instrument was checked before and after each monitoring event. Operation of the 1-hour TSP meter was follow manufacturer's Operation and Service Manual. A valid calibration certificate is attached in *Appendix G*.

# 24-hour TSP

- 4.1.5 The equipment used for 24-hour TSP measurement is a Tisch Environmental, Inc. Model TE-5170 TSP high volume air sampling system, which complied with EPA Code of Federal Regulation, Appendix B to Part 50. The High Volume Air Sampler (HVS) consists of the following:
  - a. An anodized aluminum shelter;
  - b. A 8"x10" stainless steel filter holder:
  - c. A blower motor assembly;
  - d. A continuous flow/pressure recorder;
  - e. A motor speed-voltage control/elapsed time indicator;
  - f. A 7-day mechanical timer, and
  - g. A power supply of 220v/50 hz
- 4.1.6 Prior of 24-hour TSP monitoring, the HVS was calibrated in accordance with the manufacturer's instruction using the NIST-certified standard calibrator (Tisch Calibration Kit Model TE-5028A). The 24-hour TSP Monitoring using the HVS was also processed in accordance with the manufacturer's Operations Manual. A valid calibration certificate of the calibration kit with the certificate of HVS calibrated is attached in *Appendix G*.
- 4.1.7 24-hour TSP was collected by the ET on filters of HVS and quantified by a local HOKLAS accredited laboratory, ALS Technichem (HK) Pty Ltd (ALS), upon receipt of the samples. The ET keeps all the sampled 24-hour TSP filters in normal air conditioned room conditions, i.e. 70% HR (Relative Humidity) and 25°C, for six months prior to disposal.





#### 4.2 CONSTRUCTION NOISE MONITORING

## **Monitoring Location**

4.2.1 The detailed information of construction noise monitoring stations referred to *Table 3-2* and the graphical plot of monitoring locations shown in *Appendix E* in this report.

# **Monitoring Equipment**

- 4.2.2 All the monitoring equipment to be used in the EM&A program as listed in *Table 3-3* has been agreed with the IEC.
- 4.2.3 Sound level meter listed in *Table 3-4* is complied with the International Electrotechnical Commission Publications 651: 1979 (Type 1) and 804: 1985 (Type 1) specifications, as recommended in Technical Memorandum (TM) issued under the Noise Control Ordinance (NCO). A valid of calibration certificates including sound level meter and an acoustic were shown in *Appendix G*.

# **Monitoring Procedures**

- 4.2.4 The noise measurement was performed with the meter set to FAST response and on the A-weighted equivalent continuous sound pressure level (Leq). Leq(30min) in six consecutive Leq(5 min) measurements were used as the monitoring parameter throughout the baseline monitoring period.
- 4.2.5 During the monitoring, the sound level meter was mounted on a tripod at a height of about 1.2 m and placed at the monitoring locations and oriented such that the microphone was pointed to the site with the microphone facing perpendicular to the line of sight. The windshield was fitted for the measurement. For construction noise monitoring, all monitoring stations were conducted 1 m from the exterior of the building façade.
- 4.2.6 Prior noise measurement, the accuracy of the sound level meter was checked using an acoustic calibrator generating a known sound pressure level at a known frequency. The calibration level from before and after the noise measurement agrees to within 1.0dB.
- 4.2.7 During the noise measurement, a portable wind speed meter was used to check wind speed (m/s). For baseline noise monitoring, no wind speed was exceeding 5m/s or gusts exceeding 10m/s. Also, noise measurement in time was no fog and rain.

# 4.3 DATA MANAGEMENT AND DATA QA/QC CONTROL

- 4.3.1 The monitoring data were handled by the ET's in-house data recording and management system.
- 4.3.2 The monitoring data recorded in the equipment were downloaded directly from the equipment at the end of each monitoring day. The downloaded monitoring data were input into a computerized database properly maintained by the ET. The laboratory results were input directly into the computerized database and checked by personnel other than those who input the data.
- 4.3.3 For monitoring parameters that require laboratory analysis, the local laboratory shall follow the QA/QC requirements as set out under the HOKLAS scheme for the relevant laboratory tests.

Phase 1A and Sewerage Works at Ping Che Road

1<sup>st</sup> Quarterly Environmental Monitoring and Audit (EM&A) Summary Report (October to December 2015)



#### 5 IMPACT MONITORING RESULTS

# 5.1 GENERAL

5.1.1 Since the major construction work of the Project commenced on 1 October 2015, air quality and nose monitoring at the designated locations were therefore performed.

# 5.2 RESULTS OF AIR QUALITY MONITORING

5.2.1 In the Reporting Period, a total of **90** events of 1-hour TSP and **34** events of 24-hour TSP monitoring were performed. The summary of air quality monitoring in the Reporting Period is shown in *Tables 5-1* and the relevant graphical plots are shown in *Appendix G*.

Table 5-1 Summary of Air Quality Monitoring Results

Monitoring	1-hour TSP (μg/m³)			nitoring 1-hour TSP (μg/m³) 24-hour TSP (μg/m³)			$(m^3)$
Location	Min	Max	Average	Min	Max	Average	
AM1	44	235	96	11	84	34	
Record Date	17-Nov-15	8-Oct-15	45 events	12-Nov-15	30-Nov-15	17 events	
AM2/ AM2a	36	218	91	17	108	51	
Record Date	28-Nov-15	10-Dec-15	45 events	9-Dec-15	30-Nov-15	17 events	

5.2.2 In the Reporting Period, the 24-hour and 1-hour TSP monitoring results were below the Action/ Limit Level. No Notification of Exceedances (NOE) of air quality criteria or corrective action was therefore required.

### 5.3 RESULTS OF CONSTRUCTION NOISE MONITORING

5.3.1 In the Reporting Period, a total of **28** event noise measurements were carried out at the designated locations. During construction noise monitoring, the sound level meter was set in 1m from the exterior of the building façade. Therefore, no façade correction (+3dB(A)) is added according to acoustical principles and EPD guidelines. The construction noise monitoring results at the designated locations are summarized in *Table 5-2* and the relevant graphical plots are shown in *Appendix G*.

**Table 5-2** Summary of Construction Noise Monitoring Results

Monitoring	Leq, 30min (dB((A))			
Location	Min	Max		
NM1	51	68		
Record Date	10-Dec-15	16-Dec-15		
NM2	46	57		
Record Date	19-Oct-15	22-Dec-15		

5.3.2 As shown in *Table 5-2*, the noise level measured at the designated monitoring locations were below 75dB(A). Furthermore, there was no noise complaints (Action Level exceedance) received by the RE, Contractors or DSD in the Reporting Period. Therefore, no Action or Limit Level exceedance was triggered and no corrective action was required.

# 5.4 CONCLUSION

5.4.1 In view of the monitoring result throughout the Reporting Period, there were no exceedances recorded in respect to air quality and noise monitoring. It indicated that the implemented mitigation measures are effectively to minimize the impact attributable to the construction works. Moreover, the set of data collected under monitoring work are with statistical power to categorically identify or confirm the absence of impact attributable to the works.



# 6 WASTE MANAGEMENT

# 6.1 GENERAL WASTE MANAGEMENT

Waste management was carried out by an on-site Environmental Officer or an Environmental Supervisor from time to time.

# **6.2** RECORDS OF WASTE QUANTITIES

- 6.2.1 All types of waste arising from the construction work are classified into the following:
  - Construction & Demolition (C&D) Material;
  - Chemical Waste;
  - General Refuse; and
  - · Excavated Soil.
- 6.2.2 The quantities of waste for disposal in this Reporting Period are summarized in *Tables 6-1* and 6-2 and the Summary Waste Flow Table is shown in *Appendix I*. Whenever possible, materials were reused on-site as far as practicable.

Table 6-1 Summary of Quantities of Inert C&D Materials for the Project

Type of Weste	Quantity				Disposal
Type of Waste	Oct 15	Nov 15	Dec 15	Cumulated	Location
C&D Materials (Inert) (in '000m <sup>3</sup> )	0.035	1.119	1.30	2.454	
Reused in this Project (Inert) (in '000 m <sup>3</sup> )	0	0.001	0.001	0.002	
Reused in other Projects (Inert) (in '000 m <sup>3</sup> )	0	0	0	0	
Disposal as Public Fill (Inert) (in '000 m <sup>3</sup> )	0.007	0.855	0.555	1.417	Tuen Mun 38

Table 6-2 Summary of Quantities of C&D Wastes for the Project

True of Works	Quantity				Disposal
Type of Waste	Oct 15	Nov 15	Dec 15	Cumulated	Location
Metals ('000kg)	43.790	44.170	25.550	113.51	Licensed collector
Paper / Cardboard Packing ('000kg)	0	0	0	0	
Plastics ('000kg)	0	0	0	0	
Chemical Wastes ('000kg)	0	0	0	0	
General Refuses ('000m <sup>3</sup> )	0.014	0	0.026	0.04	NENT



# 7 SITE INSPECTION

# 7.1 REQUIREMENTS

7.1.1 According to the Updated EM&A Manual, the environmental site inspection shall be formulation by ET Leader. Weekly environmental site inspections should carry out to confirm the environmental performance.

# 7.2 FINDINGS / DEFICIENCIES DURING THE REPORTING PERIOD

- 7.2.1 In the Reporting Period, joint site inspection to evaluate the site environmental performance by the RE, ET and the Contractor has been carried out on 7, 14, 22 and 27 October 2015, 3, 10, 17 and 25 November 2015, 1, 9, 15, 23 and 28 December 2015. Furthermore, IEC attend site inspection was on 22 October 2015, 25 November 2015 and 28 December 2015. No non-compliance was noted.
- 7.2.2 Observations for the site inspections and audit within this Reporting Period are summarized in *Table 7-1*.

**Table 7-1 Site Observations** 

Date	Findings / Deficiencies	Follow-Up Status
7 Oct 2015	The Contractor was reminded to ensure all wastewater are properly treated before discharge from site.	Reminder only
14 Oct 2015	• The Contractor was reminded to cover the stockpile well with impervious sheet to reduce dust generation.	Reminder only
22 Oct 2015	Soil stockpile observed located on the working areas. The Contractor should be covered the stockpile well with impervious sheet to reduce dust generation.	Before site inspection on 27 October 2015, the stockpile has removed.
	Chemical materials observed free standing on site. The Contractor should provide secondary containment such as drip tray for all chemical container which located on site to prevent land contamination.	The chemical materials was immediately removed.
27 Oct 2015	A drip tray without plug is observed. As reminded that a plug should be provided prevent leaking of chemicals from drip tray and cause land contamination.	A plug was provided for the drip tray.
3 Nov 2015	No adverse environmental issues were observed.	• NA
10 Nov 2015	• The Contractor was reminded to spray waer on exposed soil regularly to reduce dust generation.	Reminder only
17 Nov 2015	The Contractor was reminded to provide drip tray for free standing chemical contaner to prevent land contamination.	Reminder only
25 Nov 2015	• The Contractor should block the drip tray under the generator to aviod leakage of chemical and cause land contamination.	The drip tray was blocked to aviod leakage of chemical.
	The Contractor was reminded to cover the dusty stockpile well with tarpaiin sheet to reduce dust generation.	Reminder only
	The Contractor was reminded to post the enviornmental permit on site.	Reminder only



# 8 ENVIRONMENTAL COMPLAINT AND NON-COMPLIANCE

# 8.1 ENVIRONMENTAL COMPLAINT, SUMMONS AND PROSECUTION

8.1.1 No environmental complaint, summons and prosecution was received in this reporting period. The statistical summary table of environmental complaint is presented in *Tables 8-1*, *8-2* and *8-3*.

**Table 8-1** Statistical Summary of Environmental Complaints

Donouting Donied	Environmental Complaint Statistics				
Reporting Period	Frequency	Cumulative	Complaint Nature		
1 – 31 October 2015	0	0	NA		
1 – 30 November 2015	0	0	NA		
1 – 31 December 2015	0	0	NA		

Table 8-2 Statistical Summary of Environmental Summons

Donauting Davied	Environmental Summons Statistics Frequency Cumulative Complaint			
Reporting Period				
1 – 31 October 2015	0	0	NA	
1 – 30 November 2015	0	0	NA	
1 – 31 December 2015	0	0	NA	

Table 8-3 Statistical Summary of Environmental Prosecution

Donouting Douise	Enviro	rironmental Prosecution Statistics		
Reporting Period	Frequency	Complaint Nature		
1 – 31 October 2015	0	0	NA	
1 – 30 November 2015	0	0	NA	
1 – 31 December 2015	0	0	NA	



# 9 IMPLEMENTATION STATUS OF MITIGATION MEASURES

# 9.1 GENERAL REQUIREMENTS

- 9.1.1 The environmental mitigation measures that recommended in the Implementation Schedule for Environmental Mitigation Measures (ISEMM) in the Updated EM&A Manual covered the issues of dust, noise, water and waste and they are summarized presented in *Appendix J*.
- 9.1.2 The Contract under the Project shall be implementing the required environmental mitigation measures according to the Updated EM&A Manual as subject to the site condition. Environmental mitigation measures generally implemented by the Contract in this Reporting Period are summarized in *Table 9-1*.

**Table 9-1 Environmental Mitigation Measures** 

Issues	Environmental Mitigation Measures
Water	• Wastewater to be treated by the filtration systems i.e. sedimentation tank
Quality	before to discharge.
Air Quality	Maintain wet surface on access road
	All vehicles must use wheel washing facility before off site
	Sprayed water during breaking works
	A cleaning truck was regularly performed on the public road to prevent
	fugitive dust emission
Noise	• Restrain operation time of plants from 07:00 to 19:00 on any working day
	except for Public Holiday and Sunday.
	Keep good maintenance of plants
	Shut down the plants when not in used.
Waste and	On-site sorting prior to disposal
Chemical	<ul> <li>Follow requirements and procedures of the "Trip-ticket System"</li> </ul>
Management	Predict required quantity of concrete accurately
	• Collect the unused fresh concrete at designated locations in the sites for
	subsequent disposal
General	The site was generally kept tidy and clean.

9.1.3 Based on monitoring results including air quality and construction noise, it is considered that the environmental mitigation measures implemented by the Contractor in this Reporting Period are effective.

Page 13



#### 10 CONCLUSIONS AND RECOMMENTATIONS

### 10.1 CONCLUSIONS

- 10.1.1 This is the 1<sup>st</sup> Quarterly EM&A Report for the Project presenting the monitoring results and inspection findings for the reporting period from 1 October to 31 December 2015.
- 10.1.2 No 24-hour or 1-hour TSP monitoring results that triggered the Action or Limit Levels were recorded. No NOEs or the associated corrective actions were therefore issued.
- 10.1.3 No noise complaint (which is an Action Level exceedance) was received and no construction noise measurement results that exceeded the Limit Level were recorded in this Reporting Period. No NOEs or the associated corrective actions were therefore issued.
- 10.1.4 No documented complaint, notification of summons or successful prosecution was received.
- 10.1.5 In the Reporting Period, 13 events of joint site inspection to evaluate the site environmental performance by the RE, ET and the Contractor were carried out. No non-compliance was noted.
- 10.1.6 No site inspection was undertaken by any external party in this Reporting Period.

#### 10.2 RECOMMENDATIONS


- During dry season, special attention should be paid to provide air quality mitigation measures including wheel wash facilities, watering of haul roads and covering of dusty materials with tarpaulin sheet, etc.
- Moreover, mitigation measures to avoid ingress of surface runoff into nearby water bodies from the construction site should be properly maintained.
- 10.2.3 To control the site performance on waste management, Tsun Yip shall ensure that all solid and liquid waste management works are fully in compliance with the relevant license/permit requirements, such as the effluent discharge licence and the chemical waste producer registration. Tsun Yip is also reminded to implement the recommended environmental mitigation measures according to the Updating Environmental Monitoring and Audit Manual.

DSD Contract No: DC/2013/09
Advance Works for Shek Wu Hui Sewage Treatment Works – Further Expansion
Phase 1A and Sewerage Works at Ping Che Road
1st Quarterly Environmental Monitoring and Audit (EM&A) Summary Report
(October to December 2015)



# Appendix A

GENERAL LAYOUT OF ADVANCE WORKS AND MAIN WORKS OF SWHSTW FURTHER EXPANSION PHASE 1A

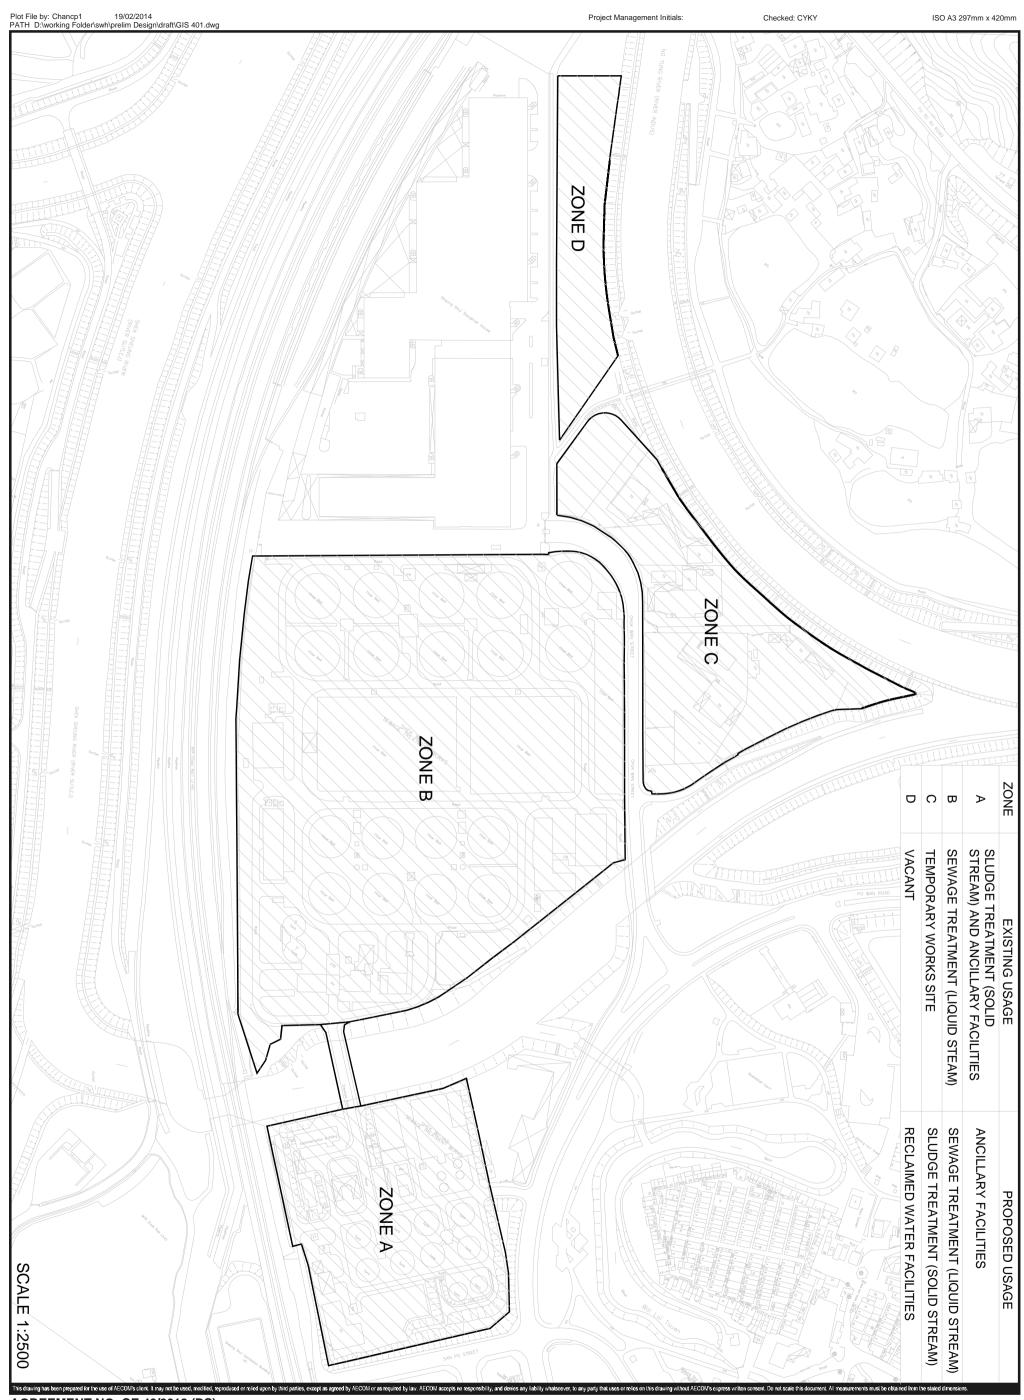

AGREEMENT NO. CE 40/2012 (DS) SHEK WU HUI SEWAGE TREATMENT WORKS - FURTHER EXPANSION PHASE 1A

Date: FEB. 2014


- INVESTIGATION


Project No.: 60284037



# Appendix B

# LAYOUT PLAN OF ADVANCE WORKS

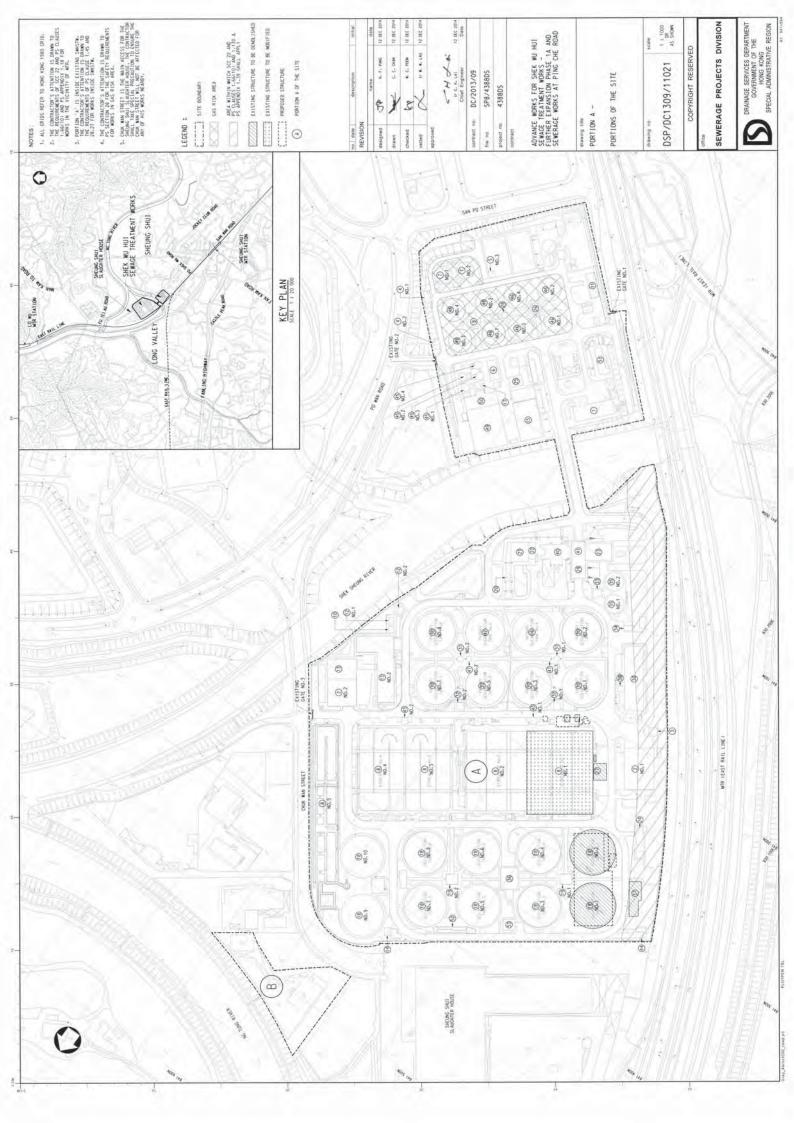

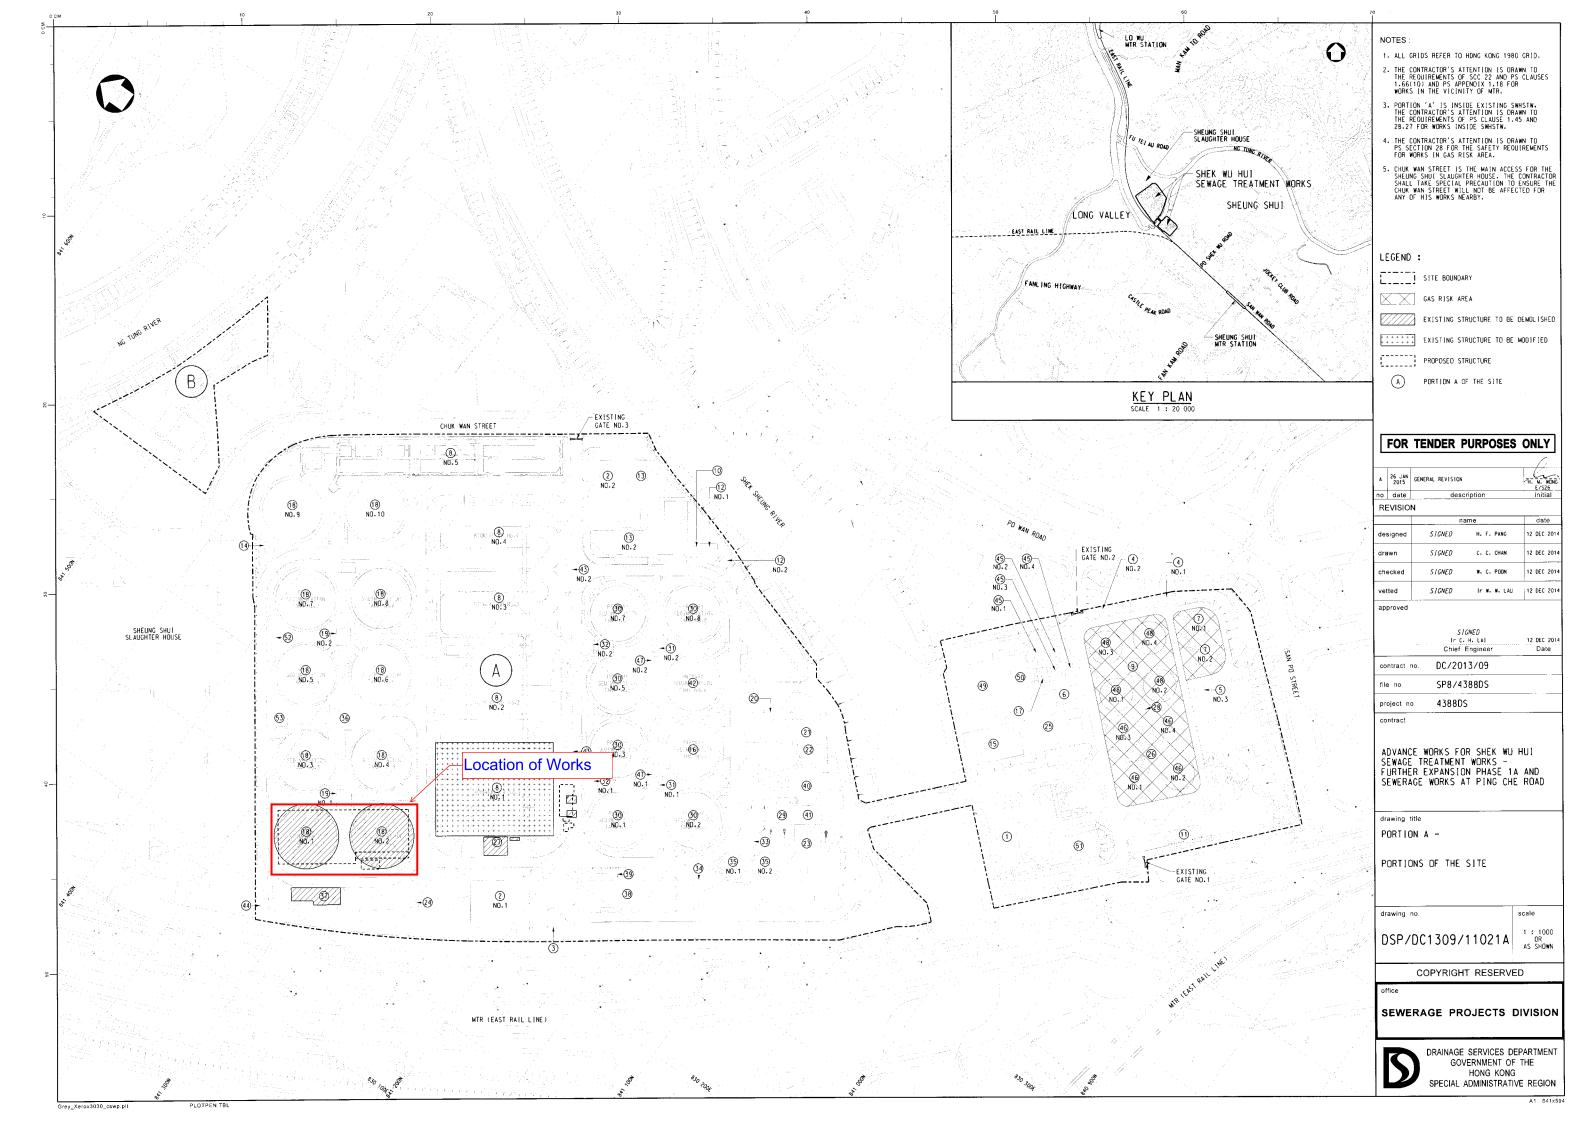



# **Appendix C**

ORGANIZATION STRUCTURE AND CONTACT DETAILS OF RELEVANT PARTIES

DSD Contract No: DC/2013/09 Advance Works for Shek Wu Hui Sewage Treatment Works – Further Expansion Phase 1A and Sewerage Works at Ping Che Road 1st Quarterly Environmental Monitoring and Audit (EM&A) Summary Report



# **Contact Details of Relevant Parties**

(October to December 2015)

Organization	Project Role	Name of Key Staff	Tel No.	Fax No.
DSD	Resident Site Engineer	Mr. Michael Leung	2594 7463	2827 8700
ANewR	Independent Environmental Checker	Mr. Adi Lee	2618 2836	3007 8648
Tsun Yip	Project Director	Mr. K. C. KAN	2633 4181	2633 4691
Tsun Yip	Project Manager	Mr. M. T. HO	9507 9634	2633 4691
Tsun Yip	Site Agent	Mr. Ken WONG	9161 9627	2633 4691
Tsun Yip	Environmental Officer	Ms. FONG Ka Ying	6312 1871	2633 4691
AUES	Environmental Team Leader	Mr. T. W. Tam	2959 6059	2959 6079
AUES	Environmental Consultant	Ms. Nicola Hon	2959 6059	2959 6079
AUES	Environmental Consultant	Mr. Ben Tam	2959 6059	2959 6079
AUES	Environmental Consultant	Mr. Martin Li	2959 6059	2959 6079

# Legend:

DSD (Employer & Resident Site Engineer) – Drainage Service Department

Tsun Yip (Main Contractor) – Tsun Yip Waterworks Construction Co Ltd


ANEWR (IEC) – ANEWR Consulting Limited

AUES (ET) – Action-United Environmental Services & Consulting





# Appendix D


# **MASTER CONSTRUCTION PROGRAM**

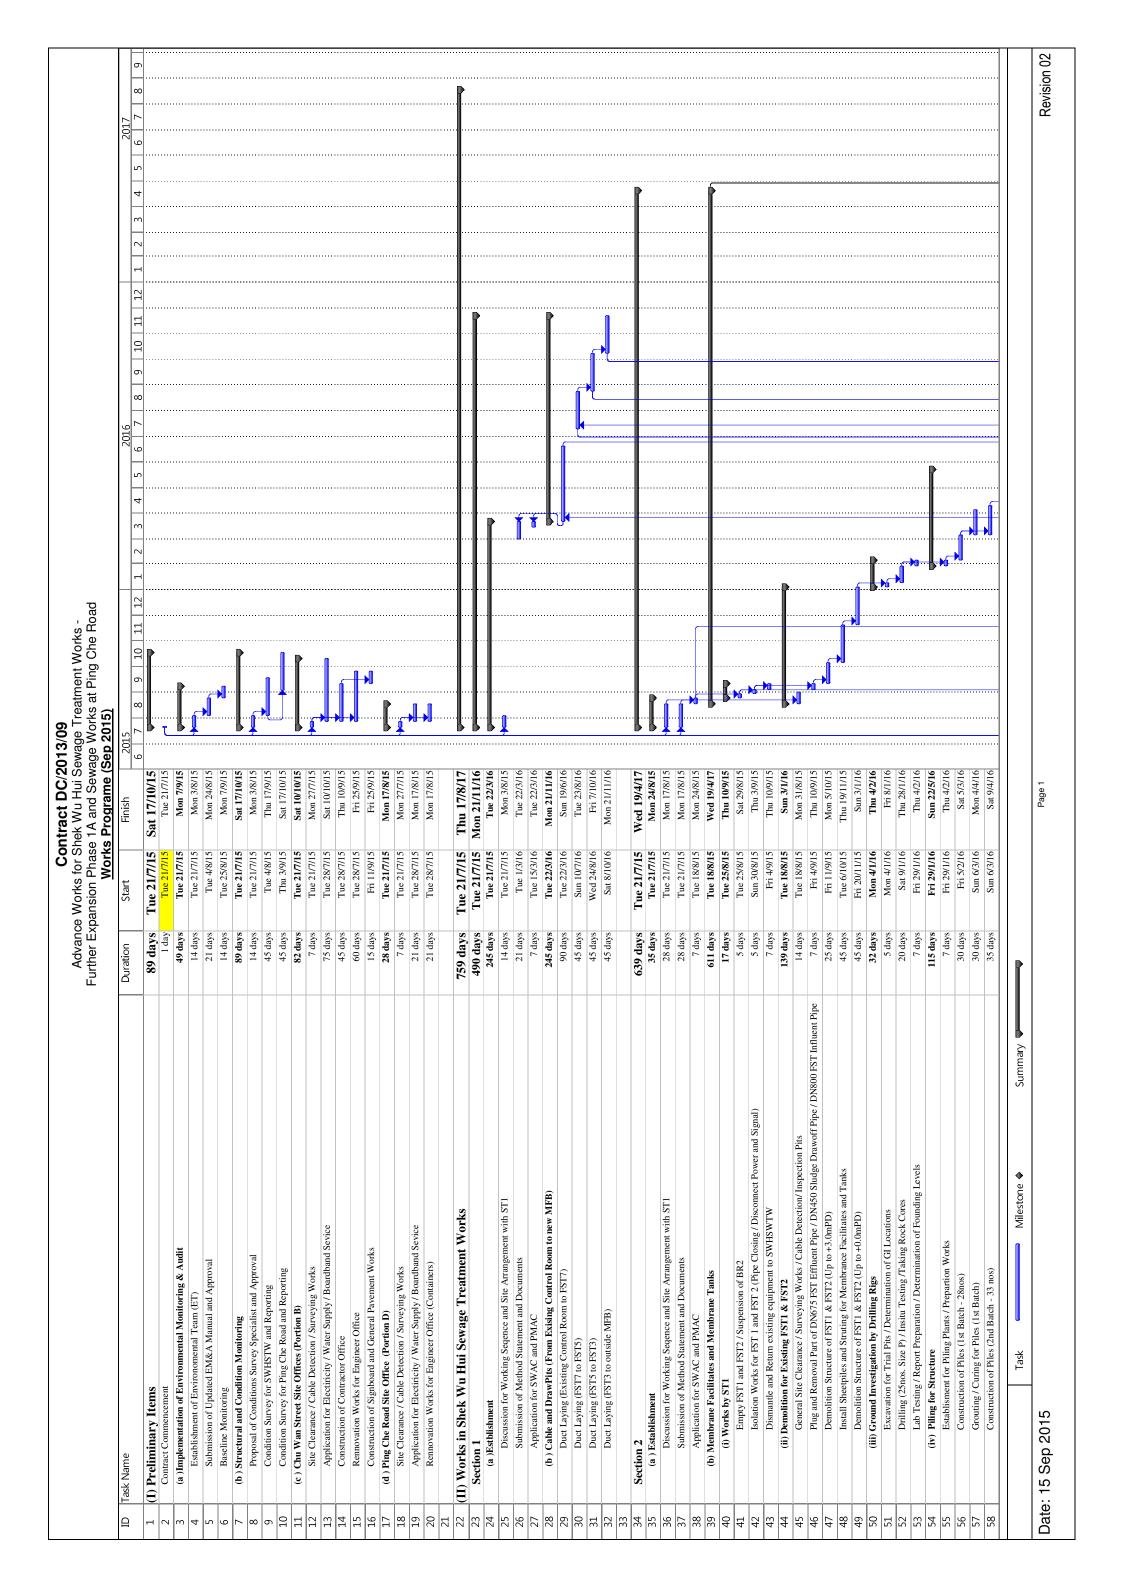

ľ		Works	me (Se	
Task Name	Duration	Start	Finish 2015 2016 6 7 8 9 10 11 12 1 2 3 4 5 6 7 8 9 10 11 12 1	2017
59 Grouting / Curing for Piles (2nd Batch)  Apple Tacting and Proof deilling	30 days	Sun 10/4/16		
	7 days	Thu 28/4/16		
	3 days	Fri 6/5/16		
Kemoval and Resetting of Pile-Load Test System Pile-Load Test for Main Pile (3rd and 4 pile)	5 days	Tue 10/5/16 Sun 15/5/16		
	5 days	Wed 18/5/16		
66 Proof Drilling 67 (v) Construction of Subtructure	5 days	Sun 15/5/16 Mon 23/5/16	Thu 19/5/16 Mon 24/10/16	
	110 days	Mon 23/5/16		
	15 days	Mon 23/5/16		
70 Laying Blinding Layer  71 Demonstration for Bilahaad	2 days	Tue 7/6/16		
Steelfixing for Membrance Facilitates (up to +1.9mPD) and Membrance Tank (up to +3.9mPD)	10 days	Tue 14/6/16		
Installation of formwork / waterstop / other accessory	7 days	Fri 24/6/16		
Concreting	3 days	Fri 1/7/16		
75 Curing of concrete / formwork removal / making good works  Steel fixing for Membrance Bacilitates & Tanks (unto ±5 4/47 5mPD)	3 days	Mon 4/7/16		
	10 days	Fri 22/7/16		
Concreting	3 days	Mon 1/8/16		
	5 days	Thu 4/8/16		
	15 days	Tue 9/8/16		
Concreting Concreting	2 days	Sat 3/9/16		
	5 days	Mon 5/9/16		
Port	115 days	Tue 7/6/16		
	20 days	Tue 7/6/16		
86 Laying Blinding Layer  O7 Decomposition for Dilahard	2 days	Mon 27/6/16		
	10 days	Mon 4/7/16		
	7 days	Thu 14/7/16		
Concreting	3 days	Thu 21/7/16	23/7/16	
91 Curing of concrete / formwork removal / making good works	3 days	Sun 24/7/16		
Installation of formwork / waterston / other accessory	10 days	Thu 11/8/16		
Concreting Concreting	3 days	Sun 21/8/16		
oncrete / formwork removal / making good	5 days	Wed 24/8/16		
	15 days	Mon 29/8/16	12/9/16	
	10 days	Tue 13/9/16		
90 Curing of concrete / formwork removal / making good works	5 days	Sun 25/9/16		
Backfilling and Extracting Sheetphile	25 days	Fri 30/9/16		
(vi)	187 days	Fri 30/9/16		
	15 days	Fri 30/9/16		
Steelfixing for Membrance Facilitates Bldgs  103 Steelfixing of formwork / other accessory	15 days	Sat 15/10/16		
	2 days	Mon 14/11/16		
	7 days	Wed 16/11/16		
	10 days	Wed 23/11/16		
	7 days	Sat 3/12/16		
Concreting	2 days	Sat 10/12/16		
L1U Curing of concrete / Johnwork removal / making good works	5 days	Mon 12/12/16		
	7 days	Tue 27/12/16		
	2 days	Tue 3/1/17		
	5 days	Thu 5/1/17		
115 Erect Working Platform and Falsework (up to +19.2mPD)  Chearffiving for Mambranea Excilitates Bldgs (up to +19.2mPD)	15 days	Thu 5/1/17	Thu 19/1/17	
	edan Cr	11107111		
Task Milestone ♦ Summary ◀				

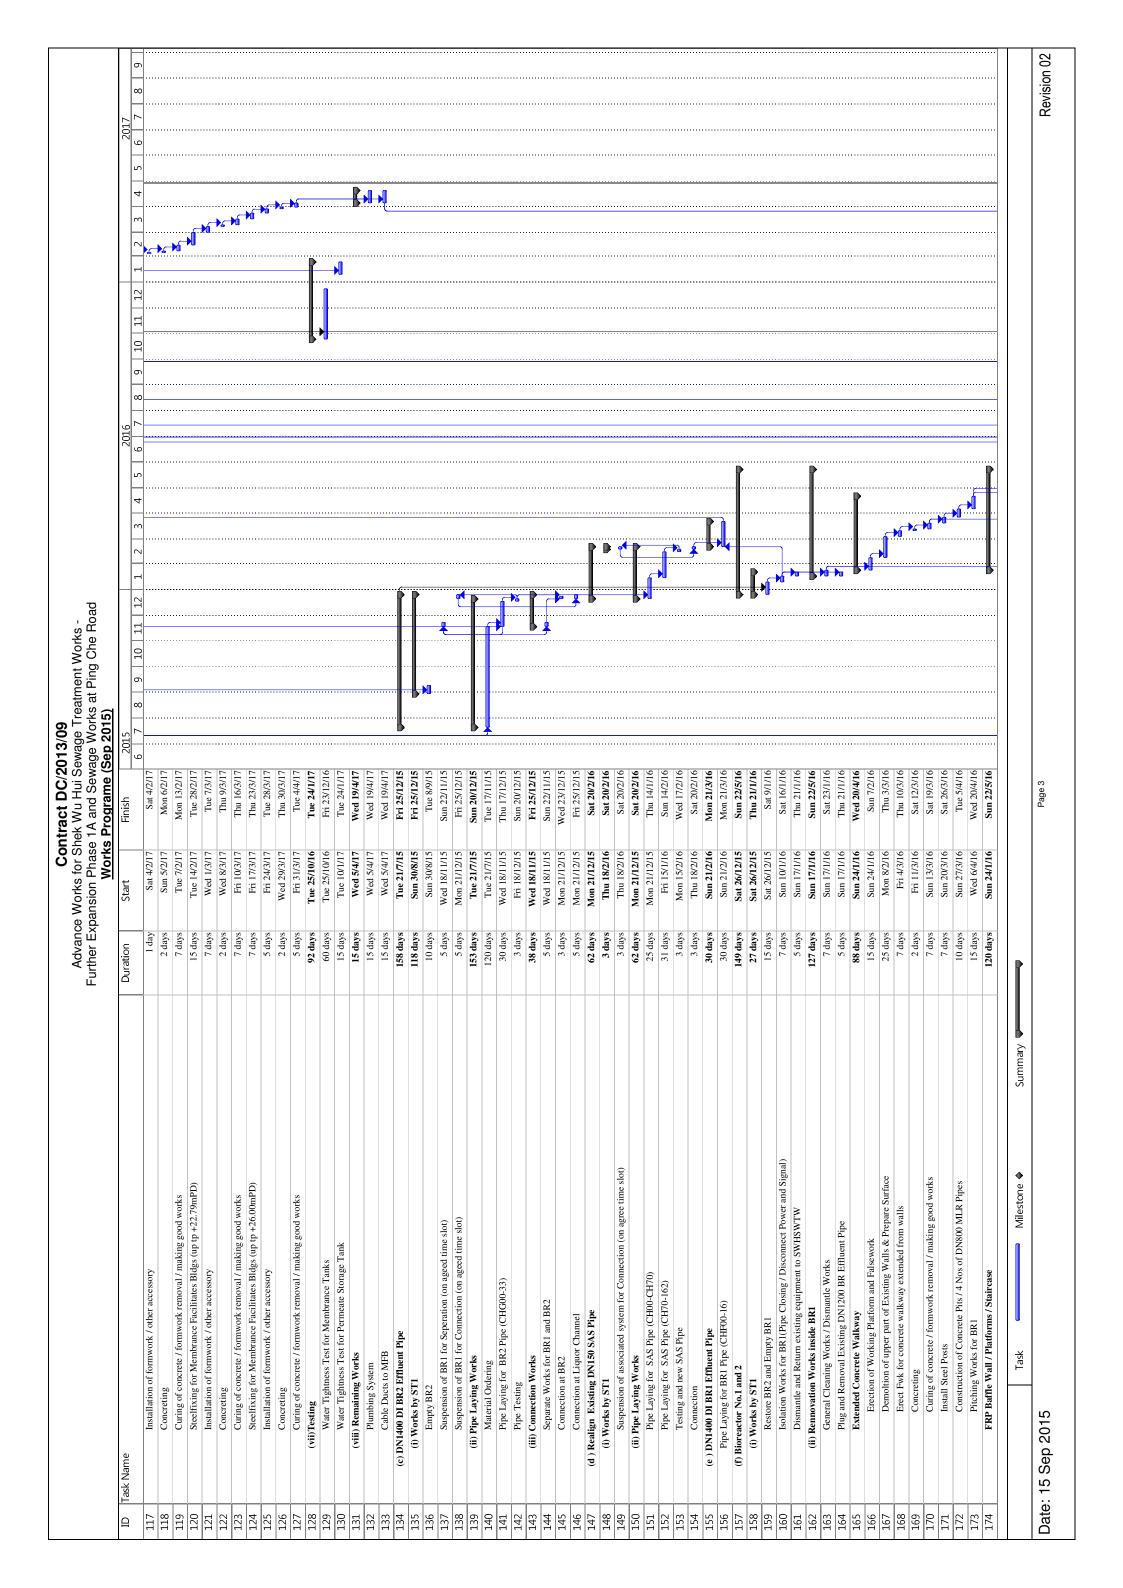

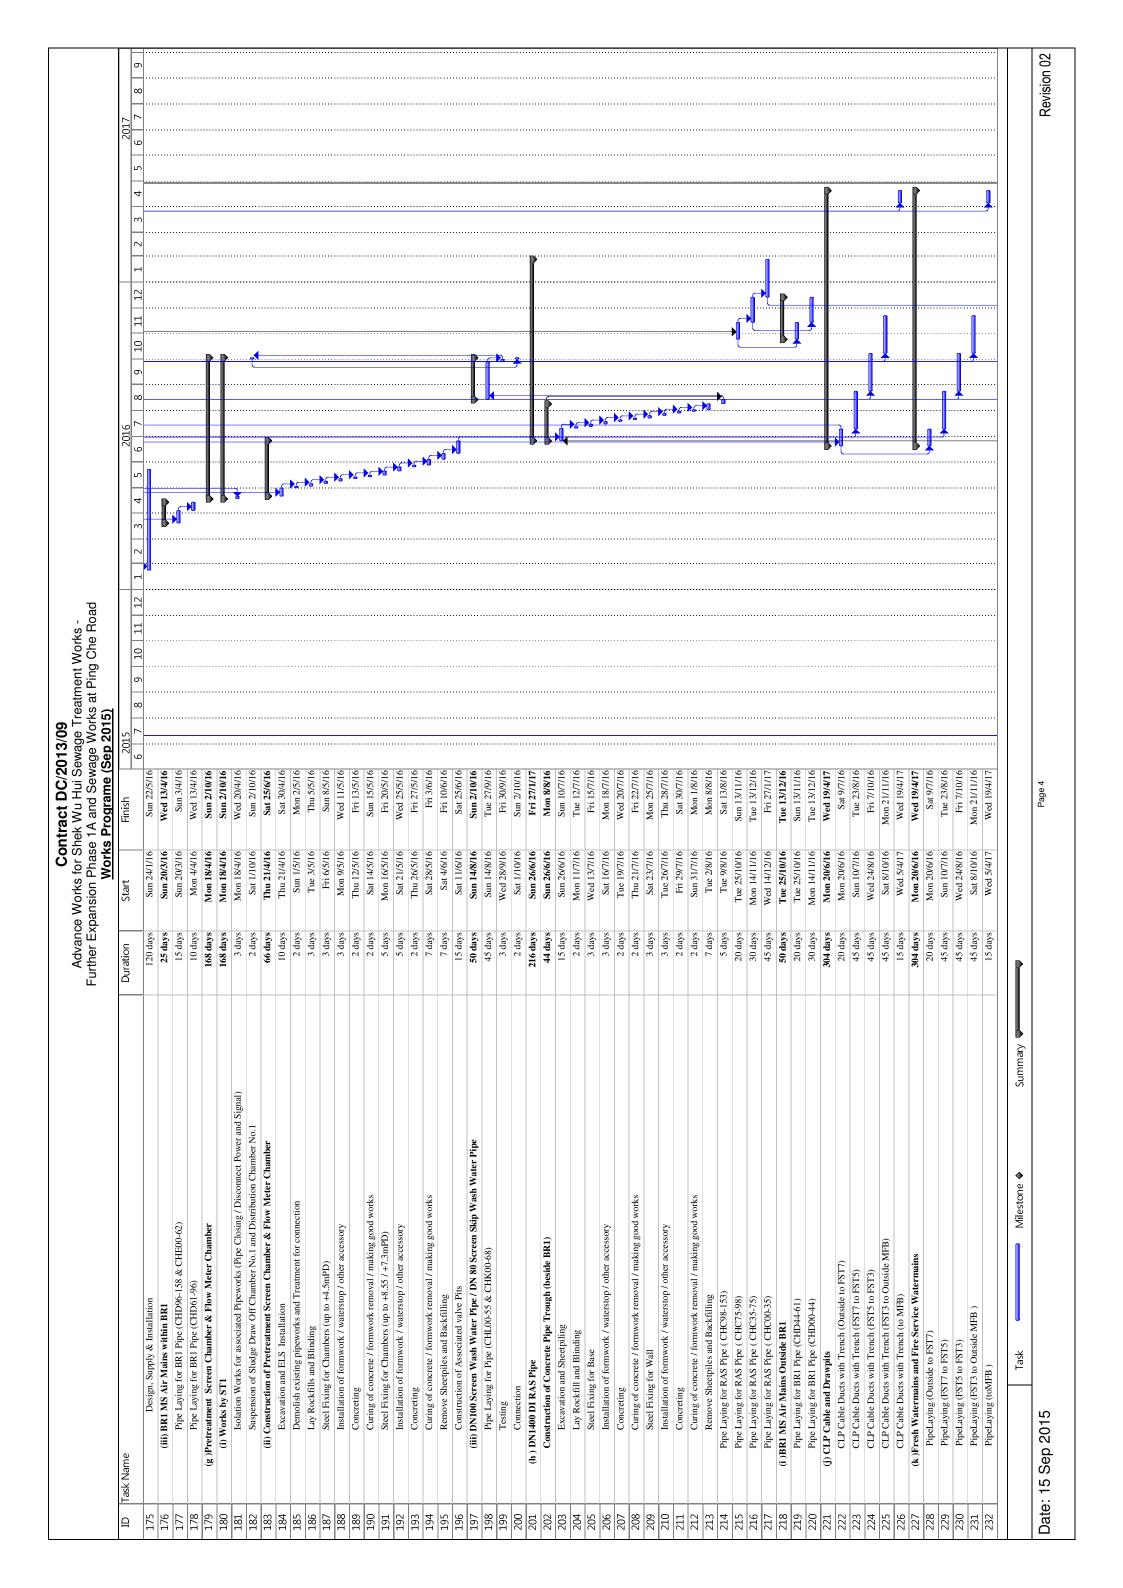

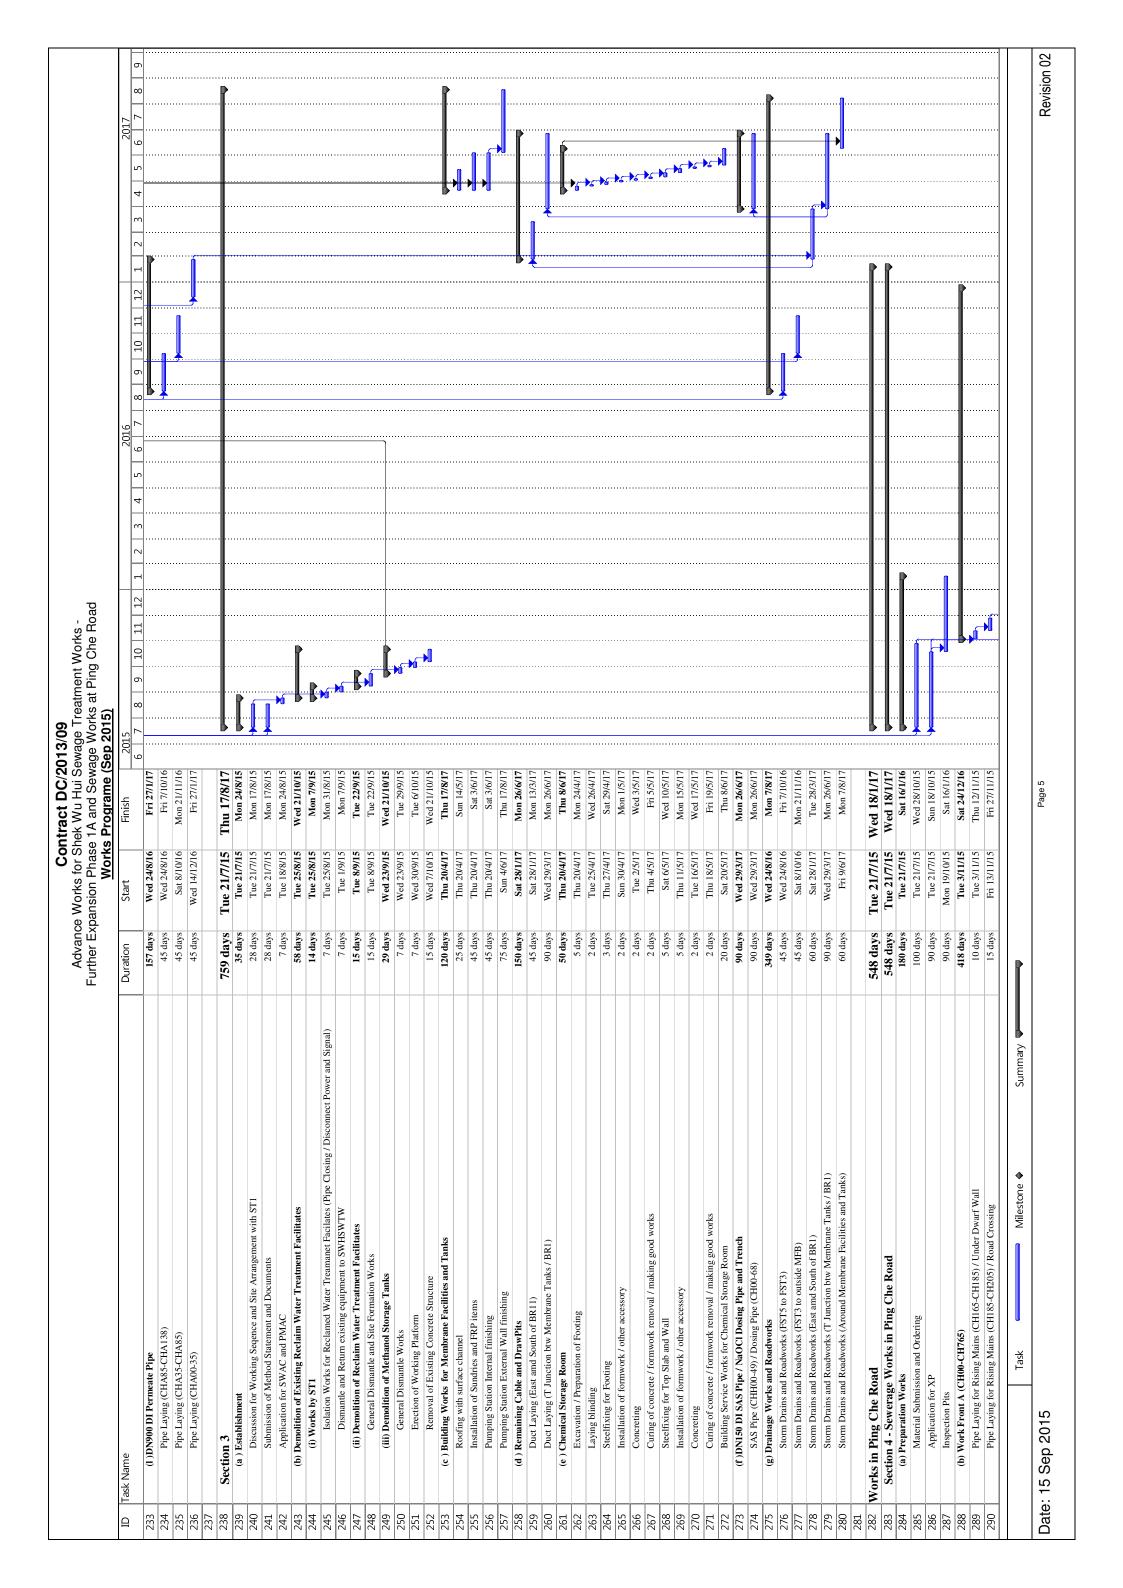


Fight Name   Paper Laying for Rising Main (CHOS CIL24) Under Dwarf Wall   Paper Laying for Rising Main (CHOS CIL24) Under Dwarf Wall   Paper Laying for Rising Main (CHOS CIL24) Under Dwarf Wall   Paper Laying for Rising Main (CHOS CHOS) Froat Crossing   Paper Laying for Rising Main (CHOS CHOS CHOS) Froat Crossing   Paper Laying for Rising Main (CHOS CHOS CHOS)	Finish 2015  Thu 17/12/15  Mon 4/1/16  Wed 3/2/16  Wed 9/3/16  Sat 28/5/16  Sun 12/6/16  Sun 12/6/16  Sun 25/9/16	1	
Pipe Laying for Raing Mainer (CH264-CH269)/Freequal   Fig. 1970   Fig. 1970   Fig. 1970	Thu 17/12/15  Mon 4/1/16  Wed 3/2/16  Wed 3/2/16  Wed 9/3/16  Sat 21/5/16  Sat 28/5/16  Sun 12/6/16  Sun 12/6/16  Sun 12/6/16  Sun 12/6/16  Sun 25/9/16		Pipe Laying for Rising Mains (CH205-CH245) / Under Dwarf Wall Pipe Laying for Rising Mains (CH245-CH295) / Footpath Pipe Laying for Rising Mains (CH295-CH300) / Road Crossing Pipe Laying for Rising Mains (CH360-CH425) / Under Dwarf Wall Pipe Laying for Rising Mains (CH360-CH425) / Under Dwarf Wall Pipe Laying for Rising Mains (CH445-CH560) / Under Dwarf Wall Pipe Laying for Rising Mains (CH445-CH560) / Under Dwarf Wall Interim Pressure Test Pipe Laying for Rising Mains (CH560-CH670) / Footpath Pipe Laying for Rising Mains (CH560-CH670) / Road Crossing Pipe Laying for Rising Mains (CH570-CH755) / Road Crossing Pipe Laying for Rising Mains (CH576-CH165) / Road Crossing Pipe Laying for Rising Mains (CH576-CH165) / Road Crossing Pipe Laying for Rising Mains (CH600-CH675) / Carpark Pipe Laying for Rising Mains (CH600-CH165) / Road Crossing Pipe Laying for Rising Mains (CH600-CH165) / Road Crossing Pipe Laying for Rising Mains (CH600-CH60) / Footpath Interim Pipe Testing
Pipe Large for Reiney Main (CHES CHES) (LIND) (Note Crossing   10 days   1	Mon 4/1/16  Wed 3/2/16  Wed 9/3/16  Wed 9/3/16  Thu 24/3/16  Sat 21/5/16  Sat 28/5/16  Sun 12/6/16  Sun 17/7/16  Mon 1/8/16  Sun 25/9/16		Pipe Laying for Rising Mains (CH245-CH295) / Footpath Pipe Laying for Rising Mains (CH295-CH300) / Road Crossing Pipe Laying for Rising Mains (CH300-CH360) / Footpath Pipe Laying for Rising Mains (CH445-CH445) / Under Dwarf Wall Pipe Laying for Rising Mains (CH445-CH560) / Under Dwarf Wall Interim Pressure Test Pipe Laying for Rising Mains (CH560-CH590) / Footpath Pipe Laying for Rising Mains (CH500-CH660) / Under Dwarf Wall Pipe Laying for Rising Mains (CH600-CH670) / Road Crossing Pipe Laying for Rising Mains (CH670-CH750) / Under Dwarf Wall Pipe Laying for Rising Mains (CH670-CH165) / Road Crossing Pipe Laying for Rising Mains (CH670-CH165) / Road Crossing Pipe Laying for Rising Mains (CH600-CH165) / Road Crossing Pipe Laying for Rising Mains (CH600-CH165) / Road Crossing Pipe Laying for Rising Mains (CH000-CH60) / Footpath Pipe Laying for Rising Mains (CH000-CH60) / Footpath
Phys Labys for Resing Main CHRIOCHESO (Portable)	Wed 3/2/16 Wed 9/3/16 Wed 9/3/16 Sat 21/5/16 Sat 28/5/16 Sun 17/7/16 Mon 1/8/16 Sun 25/9/16		Pipe Laying for Rising Mains (CH300-CH425) / Under Dwarf Wall Pipe Laying for Rising Mains (CH360-CH425) / Under Dwarf Wall Pipe Laying for Rising Mains (CH445-CH445) / Road Crossing Pipe Laying for Rising Mains (CH445-CH560) / Under Dwarf Wall Interim Pressure Test Pipe Laying for Rising Mains (CH560-CH590) / Footpath Pipe Laying for Rising Mains (CH560-CH660) / Under Dwarf Wall Pipe Laying for Rising Mains (CH670-CH670) / Road Crossing Pipe Laying for Rising Mains (CH750-CH750) / Under Dwarf Wall Pipe Laying for Rising Mains (CH750-CH755) / Road Crossing Pipe Laying for Rising Mains (CH055-CH165) / Carpark Pipe Laying for Rising Mains (CH050-CH165) / Carpark Pipe Laying for Rising Mains (CH000-CH60) / Footpath Interim Pipe Testing
Page Laping for Resing Mains (CHESCO CHESO) (Laker Deard Wall   Reging CHESCO CHESO) (Read Crossing CHESCO CHESCO) (Read Crossing CHESCO CHESCO) (Read Crossing CHESCO CHESCO) (Read Crossing CHESCO C	Wed 9/3/16 Thu 24/3/16 Sat 21/5/16 Sat 28/5/16 Sun 12/6/16 Sun 12/6/16 Mon 1/8/16 Sat 10/9/16	<u> </u>	Pipe Laying for Rising Mains (CH360-CH425) / Under Dwarf Wall Pipe Laying for Rising Mains (CH445-CH560) / Under Dwarf Wall Interim Pressure Test Pipe Laying for Rising Mains (CH560-CH560) / Footpath Pipe Laying for Rising Mains (CH590-CH660) / Under Dwarf Wall Pipe Laying for Rising Mains (CH500-CH660) / Road Crossing Pipe Laying for Rising Mains (CH670-CH750) / Under Dwarf Wall Pipe Laying for Rising Mains (CH670-CH765) / Road Crossing Pipe Laying for Rising Mains (CH6750-CH165) / Road Crossing Pipe Laying for Rising Mains (CH155-CH165) / Road Crossing Pipe Laying for Rising Mains (CH600-CH165) / Road Crossing Pipe Laying for Rising Mains (CH000-CH60) / Footpath Interim Pipe Testing
Pipe Laying for Riving Mains (CH64C-RE00) Foodral Wall	Sat 21/5/16 Sat 28/5/16 Sun 12/6/16 Sun 17/7/16 Mon 1/8/16 Sat 10/9/16 Sun 25/9/16	<u> </u>	Pipe Laying for Rising Mains (CH45-CH560) /Under Dwarf Wall Interim Pressure Test Pipe Laying for Rising Mains (CH560-CH590) / Footpath Pipe Laying for Rising Mains (CH560-CH660) /Under Dwarf Wall Pipe Laying for Rising Mains (CH660-CH660) /Under Dwarf Wall Pipe Laying for Rising Mains (CH670-CH750) /Under Dwarf Wall Pipe Laying for Rising Mains (CH750-CH765) / Road Crossing Pipe Laying for Rising Mains (CH155-CH165) / Road Crossing Pipe Laying for Rising Mains (CH60-CH165) / Carpark Pipe Laying for Rising Mains (CH60-CH60) / Footpath Interim Pipe Testing
Prepr. Laying for Rainy Main (CHS04-CHS90) Footpath   15 days   8 ma 295519   58 ma 295016	Sat 28/5/16 Sun 12/6/16 Sun 12/6/16 Mon 1/8/16 Sat 10/9/16 Sun 25/9/16		Interim Pressure Test Pipe Laying for Rising Mains (CH560-CH590) / Footpath Pipe Laying for Rising Mains (CH590-CH660) /Under Dwarf Wall Pipe Laying for Rising Mains (CH660-CH670) / Road Crossing Pipe Laying for Rising Mains (CH670-CH750) /Under Dwarf Wall Pipe Laying for Rising Mains (CH750-CH765) / Road Crossing Pipe Laying for Rising Mains (CH155-CH165) / Road Crossing Pipe Laying for Rising Mains (CH060-CH155) / Carpark Pipe Laying for Rising Mains (CH00-CH60) / Footpath Interim Pipe Testing
Pripe Laying for Reining Mains (CHRO-CHRO) (Annet Dourd Wall	Sun 12/6/16 Sun 17/7/16 Mon 1/8/16 Sat 10/9/16 Sun 25/9/16		Pipe Laying for Rising Mains (CH560-CH590) / Footpath Pipe Laying for Rising Mains (CH590-CH660) /Under Dwarf Wall Pipe Laying for Rising Mains (CH670-CH750) /Under Dwarf Wall Pipe Laying for Rising Mains (CH750-CH765) /Road Crossing Pipe Laying for Rising Mains (CH155-CH165) / Road Crossing Pipe Laying for Rising Mains (CH155-CH165) / Road Crossing Pipe Laying for Rising Mains (CH160-CH155) / Carpark Pipe Laying for Rising Mains (CH60-CH165) / Footpath Pipe Laying for Rising Mains (CH00-CH60) / Footpath Interim Pipe Testing
Pipe Laying for Rising Mains (CH600-CH870) Road Crossing   15 days   Non 18716   Mon 18716   Mon 18716   Pipe Laying for Rising Mains (CH500-CH870) Road Crossing   15 days   Non 28716   San 10916   San 12917   Pipe Laying for Rising Mains (CH53-CH165) Road Crossing   15 days   Non 28717   San 12917   Sa	Mon 1/8/16 Sat 10/9/16 Sun 25/9/16	S M S N	Pipe Laying for Rising Mains (CH660-CH670) / Road Crossing Pipe Laying for Rising Mains (CH670-CH750) /Under Dwarf Wall Pipe Laying for Rising Mains (CH750-CH765) / Road Crossing Pipe Laying for Rising Mains (CH155-CH165) / Road Crossing Pipe Laying for Rising Mains (CH60-CH155) / Carpark Pipe Laying for Rising Mains (CH00-CH60) / Footpath Interim Pipe Testing
Pipe Laying for Rising Mains (CHRO-CHISTR) (Linder Dwarf Wall   Pipe Laying for Rising Mains (CHSO-CHISTR) (Linder Dwarf Wall   Pipe Laying for Rising Mains (CHSO-CHISTR) (Linder Dwarf Wall   Pipe Laying for Rising Mains (CHSO-CHISTR) (Linder Dwarf Wall   Pipe Laying for Rising Mains (CHRO-CHISTR) (Linder Dwarf Wall   San 177116   Adays   Nan 271116   Nan 177116   Nan 271116   Nan 177116	Sat 10/9/16 Sun 25/9/16	S M Tu	Pipe Laying for Rising Mains (CH670-CH750) /Under Dwarf Wall Pipe Laying for Rising Mains (CH750-CH165) / Road Crossing Pipe Laying for Rising Mains (CH155-CH165) / Road Crossing Pipe Laying for Rising Mains (CH60-CH155) / Carpark Pipe Laying for Rising Mains (CH00-CH60) / Footpath Interim Pipe Testing
Pipe Laying for Rining Mains (CHISS-CHI65) Vands Crossing   Fladss   Fladss   Mon 269516   Mon 1010016		z H Z	Pipe Laying for Rising Mains (CH00-CH155) / Road Crossing Pipe Laying for Rising Mains (CH00-CH165) / Carpark Pipe Laying for Rising Mains (CH00-CH60) / Footpath Interim Pipe Testing
Pipe Laying for Rising Mains (CH00-CH60) Fooquat   Pipe Laying for Rising Mains (CH00-CH900) Road Crossing   Salay   Pipe Laying for Rising Mains (CH00-CH900) Road Crossing   Salay   Pipe Laying for Rising Mains (CH00-CH100) Product Powert Wall   Pipe Laying for Rising Mains (CH00-CH100) Product Powert Wall   Pipe Laying for Rising Mains (CH00-CH100) Road Crossing   Salay   Pipe Laying for Rising Mains (CH00-CH100) Road Crossing   Salay   Salay   Pipe Laying for Rising Mains (CH100-CH100) Road Crossing   Salay   Salay	Mon 10/10/16		Pipe Laying for Rising Mains (CH60-CH155) / Carpark Pipe Laying for Rising Mains (CH00-CH60) / Footpath Interim Pipe Testing
Pipe Laying for Rising Mains (PHOS-CHI640)   Faciputh   7 days Sui 171216	Sun 27/11/16		Pipe Laying for Rising Mains (CH00-CH60) / Footpath Interim Pipe Testing
Col. Work Prout B (CH766-CH1540)	Sat 17/12/16		merini ripe resung
Pipe Laying for Rising Mains (CH980-CH980) / Under Dwarf Wall   5 days   Sun 871/15   Sun 2271/15     Pipe Laying for Rising Mains (CH980-CH980) / Road Crossing   15 days   Sun 871/15   Sun 2271/15     Pipe Laying for Rising Mains (CH900-CH1007) / Under Dwarf Wall   15 days   Sun 2271/15   Sun 2271/15     Pipe Laying for Rising Mains (CH100-CH1007) / Under Dwarf Wall   15 days   Sun 2271/15   Sun 2271/16     Pipe Laying for Rising Mains (CH100-CH1007) / Under Dwarf Wall   15 days   Sun 13/12/15   Mon 4/1/16     Pipe Laying for Rising Mains (CH100-CH1007) / Road Crossing   15 days   Sun 13/12/16   The 19/1/16     Pipe Laying for Rising Mains (CH100-CH1207) / Road Crossing   15 days   Sun 27/2/16   The 19/1/16     Pipe Laying for Rising Mains (CH100-CH1207) / Road Crossing   15 days   Sun 27/2/16   The 19/1/16     Pipe Laying for Rising Mains (CH100-CH1207) / Road Crossing   15 days   Sun 27/2/16   The 19/1/16     Pipe Laying for Rising Mains (CH130-CH1207) / Road Crossing   15 days   Sun 26/2/16   Sun 18/6/16     Pipe Laying for Rising Mains (CH130-CH1207) / Under Dwarf Wall   25 days   Sun 26/2/16   Sun 18/6/16     Pipe Laying for Rising Mains (CH130-CH1307) / Under Dwarf Wall   25 days   Sun 26/2/16   Sun 18/6/16     Pipe Laying for Rising Mains (CH130-CH1401) / Road Crossing   15 days   Thu 21/7/16   Mon 28/7/16     Pipe Laying for Rising Mains (CH130-CH1401) / Road Crossing   15 days   Thu 21/7/16   Mon 28/7/16     Pipe Laying for Rising Mains (CH130-CH1401) / Road Crossing   15 days   Thu 21/7/16   Thu 29/2/16   Pipe Laying for Rising Mains (CH130-CH1401) / Road Crossing   15 days   Thu 21/7/16   Thu 29/2/16   Pipe Laying for Rising Mains (CH140-CH1401) / Road Crossing   15 days   Thu 21/2/16   Thu 29/2/16   Pipe Laying for Rising Mains (CH140-CH1401) / Road Pun Rull   10 days   Fis 20/2/16   Thu 29/2/16   Pipe Laying for Rising Mains (CH140-CH1401) / Road Pun Rull   10 days   Fis 20/2/16   Thu 20/2/16   Pipe Laying for Rising Mains (CH140-CH1401) / Road Pun Rull   10 days   Fis 20/2/16   Thu 20/2/16   Pi	Wed 18/1/17		(c) Work Front B (CH765-CH1540)
Pipe Laying for Rising Mains (CH902-CH900) Road Crossing   15 days   Sun S71/15	Sat 7/11/15		Pipe Laying for Rising Mains (CH970-CH980) /Under Dwarf Wall
Pipe Laying for Rising Mains (CH1000-CH1010) / Road Crossing   15 days   Sat 28/11/15   Sat 12/12/15     Pipe Laying for Rising Mains (CH1010-CH1055) / Under Dwarf Wall   15 days   10 days   15 days   17 me 19/11/6     Pipe Laying for Rising Mains (CH1025-CH1075) / Road Crossing   15 days   10	Sun 22/11/15		Pipe Laying for Rising Mains (CH980-CH990) /Road Crossing Pine Laving for Rising Mains (CH990-CH1000) /LInder Dwarf Wall
Pipe Laying for Rising Mains (CH105-CH1055) Road Crossing   Pipe Laying for Rising Mains (CH105-CH1180) Footpath   Pipe Laying for Rising Mains (CH1205-CH1205) Road Crossing   Pipe Laying for Rising Mains (CH1305-CH1205) Road Crossing   Pipe Laying for Rising Mains (CH1305-CH1205) Road Crossing   Pipe Laying for Rising Mains (CH1305-CH1207) Road Crossing   Pipe Laying for Rising Mains (CH1405-CH140) Footpath   Pipe Laying for Rising Mains (CH1405-CH140) Footpath   Pipe Laying for Rising Mains (CH1405-CH1407) Footpath   Pipe Laying for Rising Mains (CH1405-CH1407) Footpath   Pipe Laying for Rising Mains (CH1405-CH1207) Road Crossing   Pipe Laying for Rising Mains (CH1405-CH120	Sat 12/12/15		Pipe Laying for Rising Mains (CH1000-CH1010) / Road Crossing
Pipe Laying for Rising Mains (CHI035-CHI075) / Road Crossing   15 days   Tue 5/1/16   Tue 19/1/16   Pipe Laying for Rising Mains (CHI035-CHI180) / Foodpal   Pipe Laying for Rising Mains (CHI035-CHI180) / Foodpal   Pipe Laying for Rising Mains (CHI036-CHI180) / Road Crossing   Pipe Laying for Rising Mains (CHI206-CHI180) / Road Crossing   Pipe Laying for Rising Mains (CHI206-CHI270) / Indeer Dwarf Wall   Pipe Laying for Rising Mains (CHI206-CHI270) / Road Crossing   Pipe Laying for Rising Mains (CHI206-CHI335) / River Crossing   Rising Mains (CHI206-CHI335) / River Crossing   Rising Mains (CHI335-CHI410) / Road Crossing   Rising Mains (CHI335-CHI410) / Road Crossing   Rising Mains (CHI335-CHI410) / Road Crossing   Rising Mains (CHI336-CHI440) / Loder Dwarf Wall   Rising Mains (CHI340-CHI430) / Under Dwarf Wall   Rising Mains (CHI440-CHI430) / Under Dwarf Wall   Rising Wall Rising Mains (CHI440-CHI430) / Under Dwarf Wall   Rising Wall Rising Mains (CHI440-CHI430) / Under Dwarf Wall   Rising Wall Rising Mains (CHI440-CHI430) / Unde	Mon 4/1/16	Su	Pipe Laying for Rising Mains (CH1010-CH1055) /Under Dwarf Wall
Pipe Laying for Rising Mains (CH1095-CH1180) / Footpath         28 days         Sat 30/1/16         Fri 26/2/16           Pipe Laying for Rising Mains (CH1205-CH1205) / Road Crossing         20 days         Sat 27/2/16         Thu 17/3/16           Pipe Laying for Rising Mains (CH1205-CH1270) / Loder Dwarf Wall         15 days         Wed 20/4/16         Wed 45/16           Pipe Laying for Rising Mains (CH1390-CH1335) / River Crossing         Pipe Laying for Rising Mains (CH1335-CH1408) / Road Crossing         7 days         Nwed 20/4/16         Nwed 25/6/16           Pipe Laying for Rising Mains (CH1340-CH1340) / Under Dwarf Wall         15 days         Nwed 25/6/16         Sat 18/6/16           Pipe Laying for Rising Mains (CH1440-CH1430) / Under Dwarf Wall         16 days         Mon 11/7/16         Wed 20/7/16           Pipe Laying for Rising Mains (CH1440-CH1495) / Under Dwarf Wall         5 days         Thu 21/7/16         Hri 19/8/16           Pipe Laying for Rising Mains (CH1440-CH1495) / Under Dwarf Wall         5 days         Thu 21/7/16         Hri 19/8/16           Pipe Laying for Rising Mains (CH1440-CH1495) / Under Dwarf Wall         10 days         Thu 21/7/16         Hri 19/8/16           Pipe Laying for Rising Mains (CH1405-CH1540) / Footpath         10 days         Thu 21/7/16         Hri 19/8/16           Pipe Laying for Rising Mains (CH1405-CH1540) / Under Draft Wall         10 days         The 30/8/16         Hri	Tue 19/1/16 Fri 29/1/16	8	Pipe Laying for Rising Mains (CH1055-CH1075) / Road Crossing Pine Laving for Rising Mains (CH1075-CH1095) / Under Dwarf Wall
Pipe Laying for Rising Mains (CH180-CH1205) / Road Crossing         20 days         Sat 27/2/16         Thu 17/3/16           Pipe Laying for Rising Mains (CH1205-CH1270) / Luder Dwarf Wall         15 days         Fri 18/3/16         Tue 19/4/16           Pipe Laying for Rising Mains (CH1200-CH1235) / River Crossing         15 days         Wed 40/4/16         Wed 45/16           Pipe Laying for Rising Mains (CH1385-CH1410)/ Road Crossing         25 days         Wed 25/5/16         Sat 18/6/16           Pipe Laying for Rising Mains (CH1385-CH1410)/ Road Crossing         15 days         Sun 19/6/16         Sat 18/6/16           Pipe Laying for Rising Mains (CH1385-CH1410)/ Road Crossing         15 days         Sun 19/6/16         Sun 10/7/16           Pipe Laying for Rising Mains (CH1400-CH1440) / Footpath         10 days         Mon 11/7/16         Mon 25/7/16           Pipe Laying for Rising Mains (CH1405-CH1440) / Footpath         5 days         Tue 26/7/16         Fri 19/8/16           Pipe Laying for Rising Mains (CH1405-CH1440) / Footpath         25 days         Tue 26/7/16         Fri 19/8/16           Pipe Laying for Rising Mains (CH150-CH1440) / Footpath         10 days         Sat 20/8/16         Mon 29/8/16           Pipe Laying for Rising Mains (CH150-CH1440) / Footpath         10 days         Tue 30/8/16         Tue 30/8/16           Pipe Laying for Rising Mains (CH150-CH1440) / Road Crossing	Fri 26/2/16		Pipe Laying for Rising Mains (CH1095-CH1180) / Footpath
Pipe Laying for Rising Mains (CH1203-CH1270) / Inder Dwarf Wall         33 days         Fri 183716         The 19410           Pipe Laying for Rising Mains (CH1203-CH1390) / Road Crossing         15 days         Wed 204716         Wed 445716           Pipe Laying for Rising Mains (CH1303-CH1335-CH1385) / Under Dwarf Wall         20 days         Thu 55716         The 245716           Pipe Laying for Rising Mains (CH1385-CH1410) / Road Crossing         7 days         Sun 196/16         Sat 186/16           Pipe Laying for Rising Mains (CH1400-CH1440) / Footpath         10 days         Mon 117716         Mod 207716           Pipe Laying for Rising Mains (CH1400-CH1440) / Footpath         5 days         Thu 217716         Mon 25/716           Pipe Laying for Rising Mains (CH1400-CH1495) / Under Dwarf Wall         25 days         Thu 20/716         Fri 19/8/16           Pipe Laying for Rising Mains (CH1400-CH1495) / Under Dwarf Wall         10 days         Sat 20/8/16         Mon 29/8/16           Pipe Laying for Rising Mains (CH500-CH970) / Road Crossing         10 days         Thu 30/9/16         Fri 19/8/16	Thu 17/3/16		Pipe Laying for Rising Mains (CH1180-CH1205) / Road Crossing
Pipe Laying for Rising Mains (CH13290-CH1335) / River Crossing         20 days         Thu 5/5/16         The 24/5/16           Pipe Laying for Rising Mains (CH1335-CH1385) / Under Dwarf Wall         25 days         Wed 25/5/16         Sat 18/6/16           Pipe Laying for Rising Mains (CH1385-CH1410)/ Road Crossing         7 days         Sun 19/6/16         Sat 25/6/16           Pipe Laying for Rising Mains (CH1385-CH1430) / Under Dwarf Wall         15 days         Sun 26/6/16         Sun 10/7/16           Pipe Laying for Rising Mains (CH1440-CH1430) / Under Dwarf Wall         5 days         Thu 21/7/16         Mon 25/7/16           Pipe Laying for Rising Mains (CH1445-CH1440) / Footpath         10 days         Sat 20/8/16         Fri 19/8/16           Pipe Laying for Rising Mains (CH1495-CH1540) / Under Dwarf Wall         10 days         Sat 20/8/16         Fri 19/8/16           Pipe Laying for Rising Mains (CH1495-CH1540) / Under Draft Wall         10 days         Thu 30/8/16         Thu 89/16           Pipe Laying for Rising Mains (CH950-CH970) / Road Crossing         15 days         Fri 9/9/16         Fri 19/8/16	Tue 19/4/16 Wed 4/5/16		Pipe Laying for Rising Mains (CH1203-CH1270) /Under Dwarf Wall Pipe Laving for Rising Mains (CH1270-CH1290) /Road Crossing
Pipe Laying for Rising Mains (CH1335-CH1385) / Under Dwarf Wall         25 days         Wed 25/5/16         Sat 18/6/16           Interim Pipe Testing         7 days         Sun 19/6/16         Sat 25/6/16           Pipe Laying for Rising Mains (CH1410-CH1430) / Under Dwarf Wall         15 days         Sun 26/6/16         Sun 10/7/16           Pipe Laying for Rising Mains (CH1440-CH1440) / Footpath         5 days         Thu 21/7/16         Won 25/7/16           Pipe Laying for Rising Mains (CH1440-CH1495) / Under Dwarf Wall         25 days         Thu 26/7/16         Fri 19/8/16           Pipe Laying for Rising Mains (CH1440-CH1495) / Under Dwarf Wall         10 days         Non 29/8/16         Fri 19/8/16           Pipe Laying for Rising Mains (CH1455-CH1520) / Footpath         10 days         Tue 26/7/16         Fri 19/8/16           Pipe Laying for Rising Mains (CH1540) / Under Draff Wall         10 days         Fri 30/8/16         Fri 30/8/16           Pipe Laying for Rising Mains (CH520-CH1540) / Road Crossing         15 days         Tue 30/8/16         Fri 29/9/16	Tue 24/5/16		Pipe Laying for Rising Mains (CH1290-CH1335) / River Crossing
Pipe Laying for Rising Mains (CH1385-CH1410)/ Road Crossing   7 days   Sun 19/6/16   Sat 25/6/16     Pipe Laying for Rising Mains (CH1385-CH1410)/ Road Crossing   15 days   Sun 26/6/16   Sun 10/7/16   Wed 20/7/16     Pipe Laying for Rising Mains (CH1430-CH1440) / Footpath   5 days   Thu 21/7/16   Mon 25/7/16     Pipe Laying for Rising Mains (CH1495-CH1520) / Footpath   10 days   Sat 20/8/16   Thu 8/9/16     Pipe Laying for Rising Mains (CH1520-CH1520) / Tootpath   10 days   Tue 30/8/16   Thu 8/9/16     Pipe Laying for Rising Mains (CH520-CH1540) / Under Draft Wall   15 days   Tue 30/8/16   Fri 23/9/16   Fri 23/9/16   Thu 8/9/16   Th	Sat 18/6/16	15	Pipe Laying for Rising Mains (CH1335-CH1385) /Under Dwarf Wall
Pipe Laying for Rising Mains (CH140-CH1440) / Footpath         Diadys         State 20/7/16           Pipe Laying for Rising Mains (CH1410-CH1430) / Under Dwarf Wall         5 days         Thu 21/7/16         Mon 12/7/16           Pipe Laying for Rising Mains (CH1440-CH1440) / Footpath         25 days         Tue 26/7/16         Fri 19/8/16           Pipe Laying for Rising Mains (CH1520-CH1520) / Footpath         10 days         Sat 20/8/16         Mon 29/8/16           Pipe Laying for Rising Mains (CH1520-CH1540) / Under Draft Wall         10 days         Fri 30/8/16         Fri 23/9/16	Sat 25/6/16		Interim Pipe Testing  Divertoning for Diving Maine (CU1385 CU1410)/ Dood Conging
Pipe Laying for Rising Mains (CH1440) / Footpath         5 days         Thu 21/7/16         Mon 25/7/16           Pipe Laying for Rising Mains (CH1440-CH1495) / Under Dwarf Wall         25 days         Tue 26/7/16         Fri 19/8/16           Pipe Laying for Rising Mains (CH1495-CH1520) / Footpath         10 days         Sat 20/8/16         Mon 29/8/16           Pipe Laying for Rising Mains (CH520-CH1540) / Under Draft Wall         10 days         Tue 30/8/16         Fri 30/8/16           Pipe Laying for Rising Mains (CH550-CH970) / Road Crossing         15 days         Fri 29/9/16         Fri 29/9/16	Wed 20/7/16		Pipe Laying for Rising Mains (CH1410-CH1430) / Under Dwarf Wall
Pipe Laying for Rising Mains (CH1440-CH1495) / Under Dwarf Wall         25 days         Tue 26/7/16         Fri 19/8/16           Pipe Laying for Rising Mains (CH1520-CH1540) / Under Draft Wall         10 days         Sat 20/8/16         Mon 29/8/16           Pipe Laying for Rising Mains (CH1520-CH1540) / Under Draft Wall         10 days         Tue 30/8/16         Thu 8/9/16	Mon 25/7/16		Pipe Laying for Rising Mains (CH1430-CH1440) / Footpath
Pipe Laying for Rising Mains (CH1495-CH1520) / Footpath         10 days         Sat 20/8/16         Mon 29/8/16           Pipe Laying for Rising Mains (CH950-CH970) / Road Crossing         15 days         Fri 9/9/16         Fri 23/9/16	Fri 19/8/16		Pipe Laying for Rising Mains (CH1440-CH1495) / Under Dwarf Wall
Pripe Laying for Rising Mains (CH950-CH970) / Road Crossing         15 days         Fri 9/9/16         Fri 2/9/16	Mon 29/8/16		Pipe Laying for Rising Mains (CH1495-CH1520) / Footpath
A COLUMN TO THE COURSE OF THE COLUMN TO THE	110 8/9/10 Fri 23/9/16		Pipe Laying for Rising Mains (CH1520-CH1540) / Under Draft Wall  Pine I aving for Rising Mains (CH050-CH070) / Road Crossing
1 48 days Sat 24/9/16 Thu 10/11/16 : : :	Thu 10/11/16	S	Pipe Laying for Rising Mains (CH855-CH950) / Under Dwarf Wall
Pipe Laying for Rising Mains (CH845-CH855) / Road Crossing 15 days Fri 11/11/16 Fri 25/11/16	Fri 25/11/16		
Pipe Laying for Rising Mains (CH765-CH845) / Under Dwarf Wall 8d	Wed 4/1/17		55-CH845) / Under Dwarf Wal
	Wed 18/1/1/		Final Prssure Lesting and Swabbing



# **Appendix E**

# PROPOSED MONITORING LOCATIONS

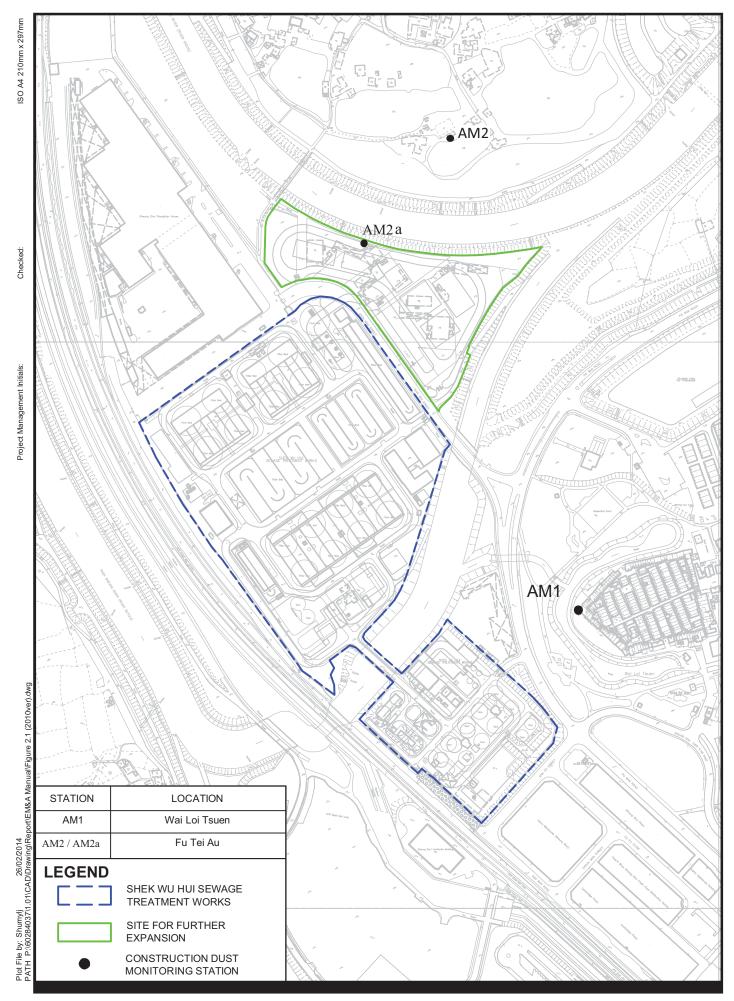

AGREEMENT NO. CE 40/2012 (DS) SHEK WU HUI SEWAGE TREATMENT WORKS - FURTHER EXPANSION PHASE 1A

Date: FEB. 2014


- INVESTIGATION

Project No.: 60284037

PROPOSED CONSTRUCTION DUST MONITORING STATIONS FOR CONSTRUCTION PHASE AND OPERATION PHASE



Drawing No. 60284037/EM&AM/405

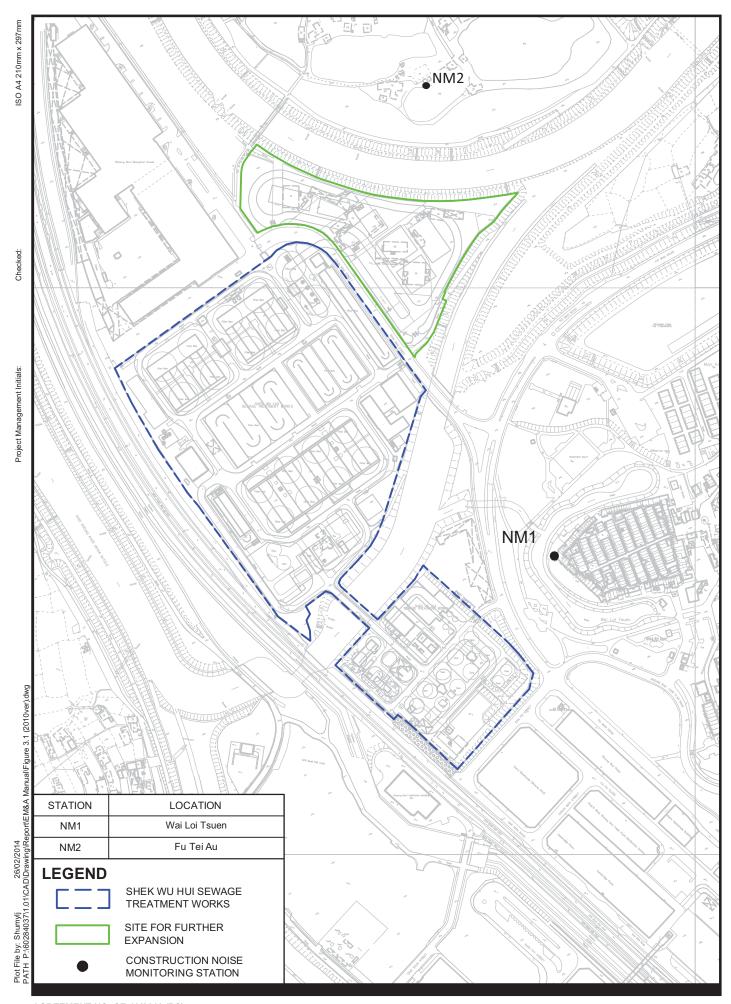

AGREEMENT NO. CE 40/2012 (DS) SHEK WU HUI SEWAGE TREATMENT WORKS

- FURTHER EXPANSION PHASE 1A

Project No.: 60284037

- INVESTIGATION

Date: FEB. 2014

LOCATIONS OF CONSTRUCTION NOISE MONITORING STATIONS



Drawing No. 60284037/EM&AM/407

DSD Contract No: DC/2013/09
Advance Works for Shek Wu Hui Sewage Treatment Works – Further Expansion
Phase 1A and Sewerage Works at Ping Che Road
1st Quarterly Environmental Monitoring and Audit (EM&A) Summary Report
(October to December 2015)



# Appendix F

**EVENT ACTION PLAN** 

Advance Works for Shek Wu Hui Sewage Treatment Works – Further Expansion Phase 1A and Sewerage Works at Ping

Che Road

1<sup>st</sup> Quarterly Environmental Monitoring and Audit (EM&A) Summary Report (October to December 2015)

#### **Event and Action Plan for Construction Dust**

	Plan for Construction Dust	Action		
Event	ET	IEC	ER	Contractor
Action level being exceeded by one sampling	<ol> <li>Identify source, investigate the causes of complaint and propose remedial measures;</li> <li>Inform IEC and ER;</li> <li>Repeat measurement to confirm finding;</li> <li>Increase monitoring frequency to daily.</li> </ol>	<ol> <li>Check monitoring data submitted by ET;</li> <li>Check Contractor's working method.</li> </ol>	Notify Contractor.	Rectify any unacceptable practice;     Amend working methods if appropriate.
Action level being exceeded by two or more consecutive sampling	<ol> <li>Identify source;</li> <li>Inform IEC and ER;</li> <li>Advise the ER on the effectiveness of the proposed remedial measures;</li> <li>Repeat measurements to confirm findings;</li> <li>Increase monitoring frequency to daily;</li> <li>Discuss with IEC and Contractor on remedial actions required;</li> <li>If exceedance continues, arrange meeting with IEC and ER;</li> <li>If exceedance stops, cease additional monitoring.</li> </ol>	<ol> <li>Check monitoring data submitted by ET;</li> <li>Check Contractor's working method;</li> <li>Discuss with ET and Contractor on possible remedial measures;</li> <li>Advise the ET on the effectiveness of the proposed remedial measures;</li> <li>Supervise Implementation of remedial measures.</li> </ol>	Confirm receipt of notification of exceedance in writing;     Notify Contractor;     Ensure remedial measures properly implemented.	Submit proposals for remedial actions to IEC within three working days of notification;     Implement the agreed proposals;     Amend proposal if appropriate.
Limit level being exceeded by one sampling	<ol> <li>Identify source, investigate the causes of exceedance and propose remedial measures;</li> <li>Inform Contractor ,IEC, ER, and EPD;</li> <li>Repeat measurement to confirm finding;</li> <li>Increase monitoring frequency to daily;</li> <li>Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results.</li> </ol>	<ol> <li>Check monitoring data submitted by ET;</li> <li>Check Contractor's working method;</li> <li>Discuss with ET and Contractor on possible remedial measures;</li> <li>Advise the ER on the effectiveness of the proposed remedial measures;</li> <li>Supervise implementation of remedial measures.</li> </ol>	<ol> <li>Confirm receipt of notification of exceedance in writing;</li> <li>Notify Contractor;</li> <li>Ensure remedial measures properly implemented.</li> </ol>	<ol> <li>Take immediate action to avoid further exceedance;</li> <li>Submit proposals for remedial actions to IEC within three working days of notification;</li> <li>Implement the agreed proposals;</li> <li>Amend proposal if appropriate.</li> </ol>
Limit level being exceeded by two or more consecutive sampling	<ol> <li>Notify IEC, ER, Contractor and EPD;</li> <li>Identify source;</li> <li>Repeat measurement to confirm findings;</li> <li>Increase monitoring frequency to daily;</li> <li>Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented;</li> <li>Arrange meeting with IEC and ER to discuss the remedial actions to be taken;</li> <li>Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results;</li> <li>If exceedance stops, cease additional monitoring.</li> </ol>	<ol> <li>Discuss amongst ER, ET, and Contractor on the potential remedial actions;</li> <li>Review Contractor's remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly;</li> <li>Supervise the implementation of remedial measures.</li> </ol>	Confirm receipt of notification of exceedance in writing;     Notify Contractor;     In consolidation with the IEC, agree with the Contractor on the remedial measures to be implemented;     Ensure remedial measures properly implemented;     If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated.	Take immediate action to avoid further exceedance;     Submit proposals for remedial actions to IEC within three working days of notification;     Implement the agreed proposals;     Resubmit proposals if problem still not under control;     Stop the relevant portion of works as determined by the ER until the exceedance is abated.

Advance Works for Shek Wu Hui Sewage Treatment Works – Further Expansion Phase 1A and Sewerage Works at Ping

Che Road

1<sup>st</sup> Quarterly Environmental Monitoring and Audit (EM&A) Summary Report (October to December 2015)

### **Event and Action Plan for Construction Noise**

Enant		Act	ion	
Event	ET	IEC	ER	Contractor
Action Level	<ol> <li>Notify IEC and Contractor;</li> <li>Carry out investigation;</li> <li>Report the results of investigation to the IEC, ER and Contractor;</li> <li>Discuss with the Contractor and formulate remedial measures;</li> <li>Increase monitoring frequency to check mitigation effectiveness.</li> </ol>	<ol> <li>Review the analysed results submitted by the ET;</li> <li>Review the proposed remedial measures by the Contractor and advise the ER accordingly;</li> <li>Supervise the implementation of remedial measures.</li> </ol>	<ol> <li>Confirm receipt of notification of failure in writing;</li> <li>Notify Contractor;</li> <li>Require Contractor to propose remedial measures for the analysed noise problem;</li> <li>Ensure remedial measures are properly implemented.</li> </ol>	<ol> <li>Submit noise mitigation proposals to IEC;</li> <li>Implement noise mitigation proposals.</li> </ol>
Limit Level	<ol> <li>Identify source;</li> <li>Inform IEC, ER, EPD and Contractor;</li> <li>Repeat measurements to confirm findings;</li> <li>Increase monitoring frequency;</li> <li>Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented;</li> <li>Inform IEC, ER and EPD the causes and actions taken for the exceedances;</li> <li>Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results;</li> <li>If exceedance stops, cease additional monitoring.</li> </ol>	<ol> <li>Discuss amongst ER, ET, and Contractor on the potential remedial actions;</li> <li>Review Contractors remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly;</li> <li>Supervise the implementation of remedial measures.</li> </ol>	<ol> <li>Confirm receipt of notification of failure in writing;</li> <li>Notify Contractor;</li> <li>Require Contractor to propose remedial measures for the analysed noise problem;</li> <li>Ensure remedial measures properly implemented;</li> <li>If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated.</li> </ol>	<ol> <li>Take immediate action to avoid further exceedance;</li> <li>Submit proposals for remedial actions to IEC within 3 working days of notification;</li> <li>Implement the agreed proposals;</li> <li>Resubmit proposals if problem still not under control;</li> <li>Stop the relevant portion of works as determined by the ER until the exceedance is abated.</li> </ol>

DSD Contract No: DC/2013/09
Advance Works for Shek Wu Hui Sewage Treatment Works – Further Expansion Phase 1A and Sewerage Works at Ping Che Road
1st Quarterly Environmental Monitoring and Audit (EM&A) Summary Report (October to December 2015)




# Appendix G


**GRAPHICAL PLOTS** 



1<sup>st</sup> Quarterly Environmental Monitoring and Audit (EM&A) Summary Report (October to December 2015)

### Air Quality - 24-Hour TSP

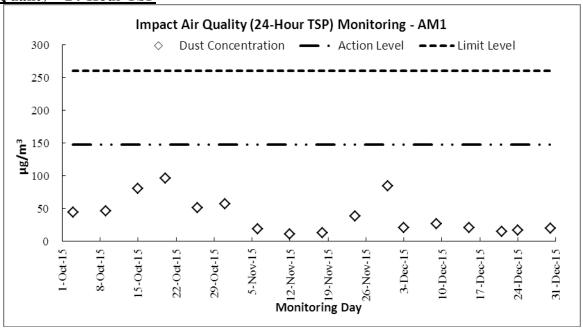


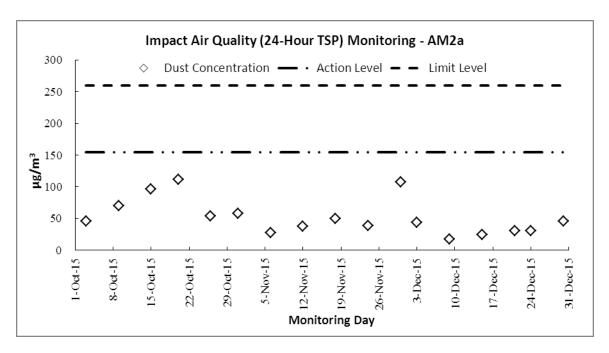


1<sup>st</sup> Quarterly Environmental Monitoring and Audit (EM&A) Summary Report (October to December 2015)



## Air Quality - 1-Hour TSP

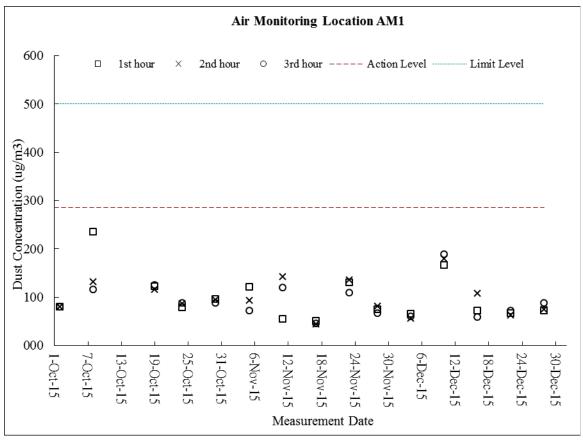


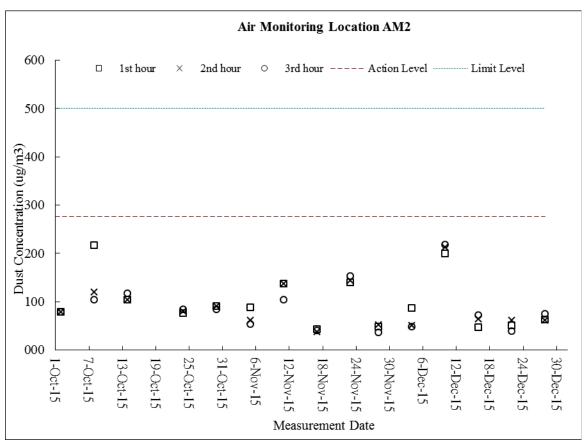




1<sup>st</sup> Quarterly Environmental Monitoring and Audit (EM&A) Summary Report (October to December 2015)

### **Construction Noise**

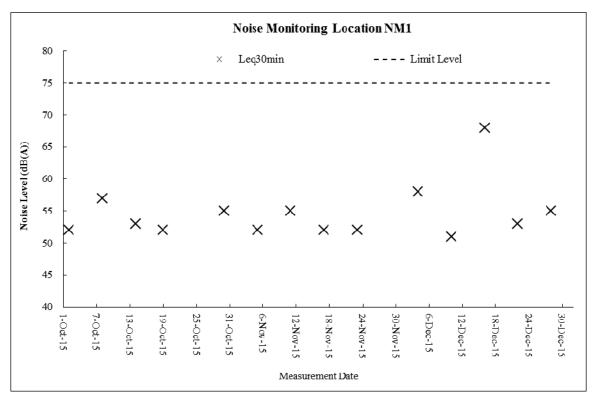

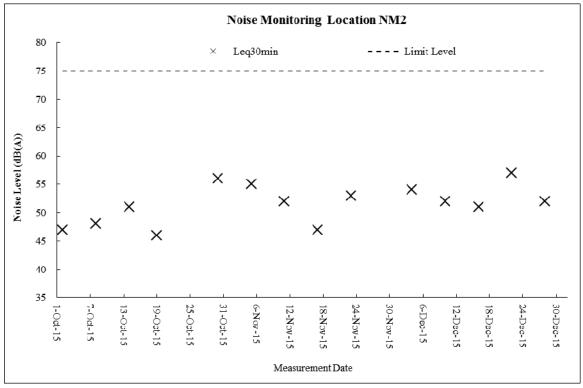



# **Appendix H**

### **METEOROLOGICAL INFORMATION**

DSD Contract No: DC/2013/09
Advance Works for Shek Wu Hui Sewage Treatment Works – Further Expansion
Phase 1A and Sewerage Works at Ping Che Road
1st Quarterly Environmental Monitoring and Audit (EM&A) Summary Report
(October to December 2015)



#### The weather of October 2015

The weather of October 2015 was warmer than usual. The monthly mean temperature of 26.0 degrees was 0.5 degrees above the normal figure of 25.5 degrees. The month was also wetter than usual, mainly as a result of heavy rain brought by tropical cyclone Mujigae during the first week of the month. A total of 168.3 millimetres of rainfall was recorded of the month, about 67 percent above the normal figure of 100.9 millimetres. However, the accumulated rainfall of 1787.4 millimetres since 1 January was still about 23 percent below the normal figure of 2334.0 millimetres for the same period.

#### The weather of November 2015

November 2015 emerged as the warmest November in Hong Kong since records began in 1884 with a record-breaking mean temperature of 24.0 degrees, 2.2 degrees above the November normal of 21.8 degrees. The anomalously warm weather was mainly attributed to the relatively high sea surface temperatures over the northern part of the South China Sea and the rather weak advection of cold air from the north despite the prevailing northeast monsoon. The month was also drier than usual with only 22.8 millimetres of rainfall, a deficit of about 39 percent as compared to the normal figure of 37.6 millimetres. The accumulated rainfall of 1810.2 millimetres since 1 January was about 24 percent below the normal figure of 2371.7 millimetres for the same period.

### The weather of December 2015

With a relatively humid air mass affecting the territory for most part of the month, the weather of December 2015 was gloomier and wetter than usual. The total duration of sunshine recorded in the month was 75.9 hours, only about 44 percent of the normal figure of 172.2 hours. Two rainy episodes on 5 and 9 December mostly contributed to the monthly rainfall of 64.3 millimetres, more than double the normal figure of 26.8 millimetres. However, the annual rainfall of 1874.5 millimetres was still about 22 percent below the normal of 2398.5 millimetres. December 2015 was also warmer than usual with a monthly mean temperature of 18.6 degrees, 0.7 degrees above the normal figure of 17.9 degrees.



# Appendix I

MONTHLY SUMMARY WASTE FLOW TABLE

## Monthly Summary Waste Flow Table

Department: Drainage Services Department Contract No.: DC/2013/09

Contract Title: Advance Works for Shek Wu Hui Sewage Treatment Works - Further Expansion Phase 1A and Sewerage Works at Ping Che Road

Commencement Date: 21-Jul-2015 Estimated completion Date: 19-Aug-2016 Estimated Contract Sum: 1.56M

		Actual Quanti	ities of Inert C&D I	Materials Generated	Monthly			Actual Quantities	of C&D Wastes	Generated Monthl	у
Month	Total Quantity Generated	Hard Rock and Large Broken Concrete	Reused in the Contract	Reused in other Projects	Disposed as Public Fill	Imported Fill	Metals	Paper/ cardboard packaging	Plastics (see Note 3)	Chemical Waste	Others, e.g. general refuse
	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000 kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000m <sup>3</sup> )
Jan	NIA	NIA	NIA	NIA	NIA	NIA	NIA	NIA	NIA	NIA	NIA
Feb	NIA	NIA	NIA	NIA	NIA	NIA	NIA	NIA	NIA	NIA	NIA
Mar	NIA	NIA	NIA	NIA	NIA	NIA	NIA	NIA	NIA	NIA	NIA
Apr	NIA	NIA	NIA	NIA	NIA	NIA	NIA	NIA	NIA	NIA	NIA
May	NIA	NIA	NIA	NIA	NIA	NIA	NIA	NIA	NIA	NIA	NIA
June	NIA	NIA	NIA	NIA	NIA	NIA	NIA	NIA	NIA	NIA	NIA
Sub-total	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
July	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Aug	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Sep	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.011
Oct	0.035	0.028	0.000	0.000	0.007	0.000	43.790	0.000	0.000	0.000	0.014
Nov	1.119	0.263	0.001	0.000	0.855	0.273	44.170	0.000	0.000	0.000	0.000
Dec	1.300	0.744	0.001	0.000	0.555	6.123	25.550	0.000	0.000	0.000	0.026
Total	2.454	1.035	0.002	0.000	1.417	6.396	113.510	0.000	0.000	0.000	0.051

Notes: (1) The waste flow table should cover the whole construction period of the Contract.

- (2) The original estimates of the C&D materials should be the estimates at contract commencement and should not be altered during construction.
- (3) Inert C&D materials that are specified in the Contract to be imported for use at the Site shall be separately indicated.
- (4) The yearly estimates of the C&D materials should be updated as appropriate taking into account the latest works programme etc.
- (5) Plastics refer to plastic bottles/containers, plastic sheets/foam from packaging material.
- (6) Broken concrete for recycling into aggregates.



# Appendix J

IMPLEMENTATION SCHEDULE FOR ENVIRONMENTAL MITIGATION MEASURES (ISEMM)

Advance Works for Shek Wu Hui Sewage Treatment Works - Further Expansion Phase 1A and Sewerage Works

at Ping Che Road

EM&A Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concern to Address	Who to implement the measures?	Location of the measure	When to implement the measures?	What requirements or standards for the measure to achieve
Air Quali			1			
S2.4.1.3	Dust suppression measures stipulated in the Air Pollution Control (Construction Dust) Regulation and good site practices:  • Any excavated or stockpile of dusty material should be covered entirely by impervious sheeting or sprayed with water to maintain the entire surface wet and then removed or backfilled or reinstated where practicable within 24 hours of the excavation or unloading;  • Any dusty material remaining after a stockpile is removed should be wetted with water and cleared from the surface of roads;  • A stockpile of dusty material should not be extended beyond the pedestrian barriers, fencing or traffic cones;  • The load of dusty materials on a vehicle leaving a construction site should be covered entirely by impervious sheeting to ensure that the dusty materials do not leak from the vehicle;  • Where practicable, vehicle washing facilities with high pressure water jet should be provided at every discernible or designated vehicle exit point. The area where vehicle washing takes place and the road section between the washing facilities and the exit point should be paved with concrete, bituminous materials or hardcores;  • When there are open excavation and reinstatement works, hoarding of not less than 2.4m high should be provided as far as practicable along the site boundary with provision for public crossing. Good site practice shall also be adopted by the Contractor to ensure the conditions of the hoardings are properly maintained throughout the construction period.  • The portion of any road leading only to construction site that is within 30m of a vehicle entrance or exit should be kept clear of dusty materials;  • Surfaces where any pneumatic or power-driven drilling, cutting, polishing or other mechanical breaking operation takes place should be sprayed with water or a dust suppression chemical continuously;  • Any area that involves demolition activities should be sprayed with water or a dust suppression chemical immediately prior to, during and immediately after the activities so as to main	To minimize the dust impact	Contractor	Work Sites	Construction phase of Advance Works and Main Works of Phase 1A	Air Pollution Control Ordinance (APCO) and Air Pollution Control (Construction Dust) Regulation

Advance Works for Shek Wu Hui Sewage Treatment Works - Further Expansion Phase 1A and Sewerage Works

at Ping Che Road

EM&A Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concern to Address	Who to implement the measures?	Location of the measure	When to implement the measures?	What requirements or standards for the measure to achieve
Air Quali	ty Impact					
	<ul> <li>Where a scaffolding is erected around the perimeter of a building under construction, effective dust screens, sheeting or netting should be provided to enclose the scaffolding from the ground floor level of the building, or a canopy should be provided from the first floor level up to the highest level of the scaffolding;</li> <li>Any skip hoist for material transport should be totally enclosed by impervious sheeting;</li> <li>Every stock of more than 20 bags of cement or dry pulverized fuel ash (PFA) should be covered entirely by impervious sheeting or placed in an area sheltered on the top and the 3 sides;</li> <li>Cement or dry PFA delivered in bulk should be stored in a closed silo fitted with an audible high level alarm which is interlocked with the material filling line and no overfilling is allowed;</li> <li>Loading, unloading, transfer, handling or storage of bulk cement or dry PFA should be carried out in a totally enclosed system or facility, and any vent or exhaust should be fitted with an effective fabric filter or equivalent air pollution control system; and</li> <li>Exposed earth should be properly treated by compaction, turfing, hydroseeding, vegetation planting or sealing with latex, vinyl, bitumen, shortcrete or other suitable surface stabilizer within six months after the last construction activity on the construction site or part of the construction site where the exposed earth lies.</li> </ul>					

Advance Works for Shek Wu Hui Sewage Treatment Works - Further Expansion Phase 1A and Sewerage Works

at Ping Che Road

EM&A Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concern to Address	Who to implement the measures?	Location of the measure	When to implement the measures?	What requirements or standards for the measure to achieve
Noise Imp	pact					
S3.4.1.1	Use of movable barrier, enclosure, acoustic mat and quiet plant. Use of wooden frames barrier with a small-cantilevered upper portion of superficial density not less than 14kg/m² on a skid footing with 25mm thick internal sound absorptive lining.	To minimize construction noise impact arising from the Project at the affected noise sensitive receivers (NSRs)	Contractor	Work Sites	Construction phase of Advance Works and Main Works of Phase 1A	EIAO-TM, Noise Control Ordinance (NCO)
S3.4.1.2	<ul> <li>Good Site Practice:</li> <li>Only well-maintained plant should be operated on-site and plant should be serviced regularly during the construction program.</li> <li>Silencers or mufflers on construction equipment should be utilized and should be properly maintained during the construction program.</li> <li>Mobile plant, if any, should be sited as far away from NSRs as possible.</li> <li>Machines and plant (such as trucks) that may be in intermittent use should be shut down between works periods or should be throttled down to a minimum.</li> <li>Plant known to emit noise strongly in one direction should, wherever possible, be orientated so that the noise is directed away from the nearby NSRs.</li> <li>Material stockpiles and other structures should be effectively utilized, wherever practicable, in screening noise from on-site construction activities.</li> </ul>	To minimize construction noise impact arising from the Project at the affected NSRs	Contractor	Work Sites	Construction period of Advance Works and Main Works of Phase 1A	EIAO-TM, NCO

Advance Works for Shek Wu Hui Sewage Treatment Works - Further Expansion Phase 1A and Sewerage Works

at Ping Che Road

EM&A Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concern to Address	Who to implement the measures?	Location of the measure	When to implement the measures?	What requirements or standards for the measure to achieve
Ecologica						
S4.2.1.1	Solid dull green noise/visual barriers of at least 2m high shall be erected and maintained between active works area and all areas of ecological importance.	Minimize noise and human disturbances during construction phase.	Contractor	Work Sites	Construction phase of Advance Works and Main Works of Phase 1A	EIAO-TM
S4.2.1.2	Avoid unnecessary lighting.	Minimize mortality impacts on birds.	Design / Contractor/ Plant Operator	Work Sites	Construction phase of Advance Works and Main Works of Phase 1A	EIAO-TM
S4.2.1.3	Good construction site practice to minimise dust generation should be followed on all construction sites. Measures to avoid, minimise and mitigate impacts on air quality are detailed in this schedule	Minimize dust generation from construction sites.	Contractor	Work Sites	Construction phase of Advance Works and Main Works of Phase 1A	EIAO-TM
S4.2.1.4	<ul> <li>The following measures to avoid, minimise and mitigate impact on water quality during construction phase shall be implemented</li> <li>Temporary sewerage and drainage to be designed and installed to collect wastewater and prevent it from entering water bodies;</li> <li>Proper locations well away from nearby water bodies should be used for temporary storage of materials (i.e. equipment, filling materials, chemicals and fuel) and temporary stockpiles of construction debris and spoil, and these should be identified before commencement of works;</li> <li>To prevent muddy water entering nearby water bodies, work sites close to nearby water bodies should be isolated, using such items as sandbags or silt curtains with lead edge at bottom and properly supported props. Other protective measures should also be taken to ensure that no pollution or siltation occurs to the water gathering grounds of the work sites;</li> <li>Construction debris and spoil should be covered and/or properly disposed of as soon as possible to avoid these being washed into nearby water bodies;</li> <li>Proper locations for discharge outlets of temporary wastewater treatment facilities well away from sensitive receivers should be identified;</li> </ul>	Avoid, minimise and mitigate impact on water quality	Contractor	Work Sites	Construction phase of Advance Works and Main Works of Phase 1A	EIAO-TM

Advance Works for Shek Wu Hui Sewage Treatment Works - Further Expansion Phase 1A and Sewerage Works

at Ping Che Road

EM&A Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concern to Address	Who to implement the measures?	Location of the measure	When to implement the measures?	What requirements or standards for the measure to achieve
Ecological	Impact					
	<ul> <li>Adequate lateral support should be erected where necessary in order to prevent soil/mud from slipping into water bodies;</li> <li>Site boundaries should be clearly marked and any works beyond the boundary strictly prohibited;</li> <li>Regular water monitoring and site audit should be carried out at adequate points along any watercourses where construction works are underway upstream within their catchments and also on the Ng Tung, Sheung Yue and Shek Sheung Rivers. If the monitoring and audit results show that pollution occurs, adequate measures including temporarily cessation of works should be considered;</li> <li>Excavation profiles should be properly designed and executed with attention to the relevant requirements for environment, health and safety;</li> <li>Where soil to be excavated is situated beneath the groundwater table, it may be necessary to lower the groundwater table by installing well points or similar means;</li> <li>Stockpiling sites should be lined with impermeable sheeting and bunded. Stockpiles should be properly covered by impermeable sheeting to reduce dust emission during dry season or contaminated run-off during rainy season. Watering should be avoided on stockpiles of contaminated soil to minimize contaminated runoff and construction materials should be properly covered and located away from nearby water bodies; and</li> <li>Supply of suitable clean backfill material after excavation, if required.</li> <li>Vehicles containing any excavated materials should be suitably covered to limit potential dust emissions or contaminated run-off, and truck bodies and tailgates should be sealed to prevent discharge during transport or during wet season;</li> <li>Speed control for the trucks carrying contaminated materials should be enforced;</li> <li>Vehicle wheel washing facilities at construction sites' exit points should be established and used, where necessary; and</li> <li>Other measures as detailed in this schedule.</li> </ul>					

Advance Works for Shek Wu Hui Sewage Treatment Works - Further Expansion Phase 1A and Sewerage Works

at Ping Che Road

EM&A Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concern to Address	Who to implement the measures?	Location of the measure	When to implement the measures?	What requirements or standards for the measure to achieve
Water Qu	ality Impact					
S5.2.2.1	Construction Site Runoff Practices and measures provided in the Practice Note for Professional Persons on Construction Site Drainage, (PROPECC PN1/94) should be followed where applicable.	Control construction runoff	Contractors	Work Sites	Construction phase of Advance Works and Main Works of Phase 1A	EIAO-TM, WPCO, EIAO
\$5.2.2.2 - \$5.2.2.3	<ul> <li>Sewage from Workforce</li> <li>Portable chemical toilets and sewage holding tanks should be provided for handling the construction sewage generated by the workforce. A licensed Contractor should be employed to provide appropriate and adequate portable toilets and be responsible for appropriate disposal and maintenance.</li> <li>Notices should be posted at conspicuous locations to remind the workers not to discharge any sewage or wastewater into the nearby environment during the construction phase of the Project. Regular environmental audit on construction site should be conducted in order to provide an effective control of any malpractices and achieve continual improvement of environmental performance on site. It is anticipated that sewage generation during the construction phase of the Project would not cause water quality impact after undertaking all required measures</li> </ul>	Handling of site sewage	Contractors	Work Sites	Construction phase of Advance Works and Main Works of Phase 1A	EIAO-TM, WPCO, EIAO

Advance Works for Shek Wu Hui Sewage Treatment Works - Further Expansion Phase 1A and Sewerage Works

at Ping Che Road

EM&A Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concern to Address	Who to implement the measures?	Location of the measure	When to implement the measures?	What requirements or standards for the measure to achieve			
Waste Ma	Vaste Management								
S6.2.2.1	<ul> <li>Good Site Practices and Waste Reduction Measures:</li> <li>Nomination of an approved person, such as a site manager, to be responsible for the implementation of good site practices, arrangements for collection and effective disposal to an appropriate facility, of all wastes generated at the site;</li> <li>Training of site personnel in site cleanliness, appropriate waste management procedures and concepts of waste reduction, reuse and recycling;</li> <li>Provision of sufficient waste disposal points and regular collection for disposal;</li> <li>Appropriate measures to minimise windblown litter and dust during transportation of waste by either covering trucks or by transporting wastes in enclosed containers;</li> <li>Regular cleaning and maintenance programme for drainage systems, sumps and oil interceptors;</li> <li>An Environmental Management Plan (EMP) should be prepared by the contractor and submitted to the Engineer for approval.</li> </ul>	Minimize waste generation during construction	Contractor	Work Sites	Construction phase of Advance Works and Main Works of Phase 1A	Waste Disposal Ordinance (WDO)			
S6.2.3.1	<ul> <li>Waste Reduction Measures:</li> <li>Segregate and store different types of waste in different containers, skip or stockpiles to enhance reuse or recycling of materials and their proper disposal;</li> <li>Proper storage and site practices to minimize the potential for damage and contamination of construction materials;</li> <li>Plan and stock construction materials carefully to minimize amount of waste generated and avoid unnecessary generation of waste;</li> <li>Sort out demolition debris and excavated materials from demolition works to recover reusable/recyclable portions (i.e. soil, broken concrete, metal etc.); and</li> <li>Provide training to workers on the importance of appropriate waste management procedures, including waste reduction, reuse and recycling.</li> </ul>	Reduce waste generation	Contractor	Work Sites	Prior to the commencement of construction of Advance Works and Main Works of Phase 1A	WDO			
S6.2.4.1 - S6.2.4.2	Storage, Collection and Transportation of Waste Should any temporary storage or stockpiling of waste is required, recommendations to minimize the impacts include:  • Waste, such as soil, should be handled and stored well to ensure secure	Minimize waste impacts arising from waste storage	Contractor	Work Sites	Construction phase of Advance Works and Main Works of Phase 1A	WDO			

Advance Works for Shek Wu Hui Sewage Treatment Works – Further Expansion Phase 1A and Sewerage Works

at Ping Che Road

EM&A Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concern to Address	Who to implement the measures?	Location of the measure	When to implement the measures?	What requirements or standards for the measure to achieve			
Waste Ma	Vaste Management								
	<ul> <li>containment, thus minimizing the potential of pollution;</li> <li>Stockpiling area should be provided with covers and water spraying system to prevent materials from wind-blown or being washed away; and</li> <li>Different locations should be designated to stockpile each material to enhance reuse.</li> </ul>								
	<ul> <li>Remove waste in timely manner;</li> <li>Employ the trucks with cover or enclosed containers for waste transportation;</li> <li>Obtain relevant waste disposal permits from the appropriate</li> </ul>								
	<ul><li>authorities; and</li><li>Disposal of waste should be done at licensed waste disposal facilities.</li></ul>								
S6.2.5.2	C&D Materials from Site Formation  Maintain temporary stockpiles and reuse excavated fill material for backfilling;  Carry out on-site sorting;  Make provisions in the Contract documents to allow and promote the use of recycled aggregates where appropriate;  Adopt "selective demolition" technique to demolish the existing structure and facilities with a view to recovering broken concrete effectively for recycling purpose, where possible; and  Implement a trip-ticket system for each works contract to ensure that	Minimize waste impacts from excavated and C&D materials	Contractor	Work Sites	Construction phase of Advance Works and Main Works of Phase 1A	Land (Miscellaneous Provisions) Ordinance, WDO, ETWB TCW No. 19/2005			
\$6.2.5.3	the disposal of C&D materials are properly documented and verified.  C&D Material from Buildings Demolition and New Building Construction  The Contractor should recycle as much as possible of the C&DM on-site. Public fill and C&DM waste should be segregated and stored in different containers or skips to enhance reuse or recycling of materials and their proper disposal. For example, concrete and masonry can be crushed and used as fill, and steel reinforcing bar can be used by scrap steel mills. Different areas of the work sites should be designated for such segregation and storage.  The use of wooden hoardings shall not be allowed. An alternative material, such as metal, aluminium or alloy etc, could be used.  Government has developed a charging policy for the disposal of waste to landfill at present. It will provide additional incentive to reduce the volume of generated waste and ensure proper segregation to allow	Minimize waste impacts from building demolition and new building construction	Contractor	Work Sites	Construction phase of Advance Works and Main Works of Phase 1A	Land (Miscellaneous Provisions) Ordinance, WDO, ETWB TCW No. 19/2005			

Advance Works for Shek Wu Hui Sewage Treatment Works – Further Expansion Phase 1A and Sewerage Works

at Ping Che Road

EM&A Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concern to Address	Who to implement the measures?	Location of the measure	When to implement the measures?	What requirements or standards for the measure to achieve
Waste Ma	8					
	reuse of the inert material on site when implemented.  • In order to minimize the impacts of the demolition works, the generated wastes must be cleared as quickly as possible after demolition. Therefore, the demolition and clearance works should be undertaken simultaneously. To facilitate proper segregation of inert and non-inert C&D material arising from demolition works, selective demolition method should be adopted.					
S6.2.5.4	<ul> <li>Chemical Waste</li> <li>If chemical wastes are produced at the construction site, the Contractors should register with EPD as chemical waste producers.</li> <li>Chemical wastes should be stored in appropriate containers and collected by a licensed chemical waste contractor. Chemical wastes (e.g. spent lubricant oil) should be recycled at an appropriate facility as far as possible, while the chemical waste that cannot be recycled should be disposed of at either the Chemical Waste Treatment Centre, or another licensed facility, in accordance with the Waste Disposal (Chemical Waste) (General) Regulation</li> </ul>	Control the chemical waste and ensure proper storage, handling and disposal	Contractor	Work Sites	Construction phase of Advance Works and Main Works of Phase 1A	Waste Disposal (Chemical Waste General) Regulation, Code of Practice on the Packaging, Labelling and Storage of Chemical Waste
\$6.2.5.5	<ul> <li>General Refuse</li> <li>General refuse should be stored in enclosed bins separately from construction and chemical wastes.</li> <li>Recycling bins should also be placed to encourage recycling.</li> <li>Preferably enclosed and covered areas should be provided for general refuse collection and routine cleaning for these areas should also be implemented to keep areas clean.</li> <li>A reputable waste collector should be employed to remove general refuse on a daily basis.</li> </ul>	Minimize production of the general refuse and avoid odour, pest and litter impacts	Contractor	Work Sites	Construction phase of Advance Works and Main Works of Phase 1A	Waste Disposal (Chemical Waste General) Regulation, Code of Practice on the Packaging, Labelling and Storage of Chemical Waste

Advance Works for Shek Wu Hui Sewage Treatment Works - Further Expansion Phase 1A and Sewerage Works

at Ping Che Road

EM&A Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concern to Address	Who to implement the measures?	Location of the measure	When to implement the measures?	What requirements or standards for the measure to achieve
	e and Visual		1			
S7.3.1.1	<ul> <li>Good Site Practices</li> <li>For areas unavoidably disturbed by the Project on a short term basis e.g. works areas, the general principle to try and restore these to their former state to suit future land use, should be adhered to.</li> <li>With regard to topsoil, where identified, it should be stripped, treated appropriately, and where suitable and practical stored for re-use in the construction of the soft landscape works such as roadside amenity strips, and open space sites.</li> </ul>	Minimize the impact to the landscape and visual	Contractor	Work Sites	Prior to construction and construction phase	
S7.3.2.1	<ul> <li>MM4 - Tree Protection &amp; Preservation</li> <li>Existing trees to be retained within the Project Site should be carefully protected during construction. In particular Old and Valuable Trees (OVTs) will be preserved according to ETWB TC (Works) No. 29/2004. Detailed Tree Protection Specification shall be provided in the Contract Specification. Under this specification, the Contractor shall be required to submit, for approval, a detailed working method statement for the protection of trees prior to undertaking any works adjacent to all retained trees, including trees in Contractor's works areas. A detailed tree survey will be carried out for the Tree Removal Application (TRA) process which will be carried out at the later detailed design stage of the Project. The detailed tree survey will propose which trees should be retained, transplanted or felled and will include details of tree protection measures for those trees to be retained.</li> </ul>	Protect and Preserve Trees	Designer / Contractor	Work Sites	Prior to construction and construction phase	ETWB TCW No. 10/2013, 29/2004 and 3/2006
\$7.3.2.1	MM5 - Tree Transplantation • Trees unavoidably affected by the Project works should be transplanted where practical. Trees should be transplanted straight to their final receptor site and not held in a temporary nursery as far as possible. A detailed Tree Transplanting Specification shall be provided in the Contract Specification, where applicable. Sufficient time for necessary tree root and crown preparation periods shall be allowed in the project programme. A detailed transplanting proposal will be submitted to relevant government departments for approval in accordance with ETWBTC 2/2004 and 3/2006 and final	Transplant Trees where suitable for transplantation	Designer / Contractor	Work Sites where possible. Otherwise consider offsite locations	Prior to construction, construction phase and operation phase	WB TCW No. 10/2013, 3/2006 and 2/2004

Advance Works for Shek Wu Hui Sewage Treatment Works - Further Expansion Phase 1A and Sewerage Works

at Ping Che Road

EM&A Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concern to Address	Who to implement the measures?	Location of the measure	When to implement the measures?	What requirements or standards for the measure to achieve			
Landscape and Visual									
	locations of transplanted trees should be agreed prior to								
	commencement of the work.								
S7.3.2.1	MM17 - Light Control	To minimize glare	Designer /	Work Sites	Construction phase				
	• Construction day and night time lighting should be controlled to	impact to adjacent	Contractor	and/or the	and operation phase				
	minimize glare impact to adjacent VSRs during the Construction	VSRs.		Plant					
	phase. Street and night time lighting shall also be controlled to								
	minimize glare impact to adjacent VSRs during the operation								
	phase.								