



JOB No.: TCS00757/15

**DSD CONTRACT NO. DC/2013/09 –
ADVANCE WORKS FOR SHEK WU HUI SEWAGE
TREATMENT WORKS – FURTHER EXPANSION PHASE 1A
AND SEWERAGE WORKS AT PING CHE ROAD**

**12ND MONTHLY ENVIRONMENTAL MONITORING AND
AUDIT (EM&A) REPORT – SEPTEMBER 2016**

PREPARED FOR

TSUN YIP WATERWORKS CONSTRUCTION CO LTD

| Date | Reference No. | Prepared By | Certified By |
|-----------------|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| 17 October 2016 | TCS00757/15/600/R0056v2 |  Martin Li (Assistant Environmental Consultant) |  Tam Tak Wing (Environmental Team Leader) |

| Version | Date | Remarks |
|---------|-----------------|-------------------------------|
| 1 | 12 October 2016 | First Submission |
| 2 | 17 October 2016 | Amended against IEC's comment |



Drainage Services Department
44/F., Revenue Tower
5 Gloucester Road
Wan Chai
Hong Kong

Your reference:

Our reference: HKDSD201/50/103825

Date: 17 October 2016

Attention: Mr Michael Leung

BY EMAIL & POST
(email: hkleung@dsd.gov.hk)

Dear Sirs

Agreement No.: SP 01/2015
Environmental Monitoring and Audit for
Advance Works for Shek Wu Hui Sewage Treatment Works – Further Expansion Phase 1A
Monthly EM&A Report for September 2016

We refer to emails of 13 and 17 October 2016 attaching a Monthly EM&A Report for September 2016 for the captioned project prepared by the Environmental Team (ET) of the captioned project.

We have no further comment and hereby verify the Monthly EM&A Report in accordance with Clause 3.4 of the Environmental Permit no. FEP-01/474/2013.

Please do not hesitate to contact the undersigned or our Mr Nic Lam at 2618 2836 should you have any queries.

Yours faithfully
ANewR CONSULTING LIMITED

Adi Lee
Independent Environmental Checker

LYMA/LHHN/cklc

cc Tsun Yip – Mr Ken Wong (email: kenwong@tsunyip.hk)
AUES – Ms Nicola Hon (email: nicolahon@fordbusiness.com)

EXECUTIVE SUMMARY

ES.01 This is the **12nd** Monthly Environmental Monitoring and Audit Report covering the period from **1** to **30 September 2016** (the Reporting Period).

ENVIRONMENTAL MONITORING AND AUDIT ACTIVITIES

ES.02 Environmental monitoring activities under the EM&A program in this Reporting Period are summarized in the following table.

| Issues | Environmental Monitoring Parameters / Inspection | Occasions |
|--------------------|--------------------------------------------------|-----------|
| Air Quality | 1-hour TSP | 30 |
| | 24-hour TSP | 12 |
| Construction Noise | L _{Aeq} (30min) Daytime | 8 |
| Inspection / Audit | ET Regular Environmental Site Inspection | 4 |
| | IEC Monthly Environmental Site Audit | 1 |

BREACH OF ACTION AND LIMIT (A/L) LEVELS

ES.03 No exceedance of air quality and construction noise monitoring were recorded in this Reporting Period. No Notification of Exceedance (NOE) was therefore issued. The statistics of environmental exceedance, NOE issued and investigation of exceedance are summarized in the following table.

| Environmental Issues | Monitoring Parameters | Action Level | Limit Level | Event & Action | | |
|----------------------|--------------------------|--------------|-------------|----------------|---------------|--------------------|
| | | | | NOE Issued | Investigation | Corrective Actions |
| Air Quality | 1-hour TSP | 0 | 0 | 0 | - | - |
| | 24-hour TSP | 0 | 0 | 0 | - | - |
| Construction Noise | L _{Aeq} (30min) | 0 | 0 | 0 | - | - |

Note: NOE – Notification of Exceedance

ENVIRONMENTAL COMPLAINT

ES.04 No environmental complaint was recorded or received in this Reporting Period. The statistics of environmental complaint are summarized in the following table.

| Reporting Period | Environmental Complaint Statistics | | |
|------------------------|------------------------------------|------------|------------------|
| | Frequency | Cumulative | Complaint Nature |
| 1 to 30 September 2016 | 0 | 0 | NA |

NOTIFICATION OF SUMMONS AND SUCCESSFUL PROSECUTIONS

ES.05 No environmental summons or successful prosecutions were recorded in this Reporting Period. The statistics of environmental complaint are summarized in the following tables.

| Reporting Period | Environmental Summons Statistics | | |
|------------------------|----------------------------------|------------|------------------|
| | Frequency | Cumulative | Complaint Nature |
| 1 to 30 September 2016 | 0 | 0 | NA |

| Reporting Period | Environmental Prosecution Statistics | | |
|------------------------|--------------------------------------|------------|------------------|
| | Frequency | Cumulative | Complaint Nature |
| 1 to 30 September 2016 | 0 | 0 | NA |

REPORTING CHANGE

ES.06 There were no reporting changes in the Reporting Period.

SITE INSPECTION BY EXTERNAL PARTIES

ES.07 In the Reporting Period, joint site inspection to evaluate the site environmental performance by the RE, ET and the Contractor was carried out on **6, 12, 19 and 27 September 2016**. Furthermore, IEC attend site inspection was on **27 September 2016**. No non-compliance was noted.

FUTURE KEY ISSUES

- ES.08 As dry season is approaching, special attention should be paid on the potential construction dust impact since most of the construction sites are adjacent to villages. The Contractor should fully implement the construction dust mitigation measures properly.
- ES.09 Air quality mitigation measures including wheel wash facilities, watering of haul roads and covering of dusty materials with tarpaulin sheet, etc. should be properly maintained. Moreover, the contractor should be to prevent mosquito breeding on site.

Table of Contents

| | | |
|-----------|-------------------------------------------------------|-----------|
| 1 | INTRODUCTION | 1 |
| 1.1 | PROJECT BACKGROUND | 1 |
| 1.2 | REPORT STRUCTURE | 2 |
| 2 | PROJECT ORGANIZATION AND CONSTRUCTION PROGRESS | 3 |
| 2.1 | PROJECT ORGANIZATION AND MANAGEMENT STRUCTURE | 3 |
| 2.2 | CONSTRUCTION PROGRESS | 3 |
| 2.3 | SUMMARY OF ENVIRONMENTAL SUBMISSIONS | 3 |
| 3 | SUMMARY OF IMPACT MONITORING REQUIREMENT | 4 |
| 3.1 | GENERAL | 4 |
| 3.2 | MONITORING PARAMETERS | 4 |
| 3.3 | MONITORING LOCATIONS | 4 |
| 3.4 | MONITORING FREQUENCY AND PERIOD | 4 |
| 3.5 | MONITORING EQUIPMENT | 5 |
| 3.6 | DETERMINATION OF ACTION/LIMIT (A/L) LEVELS | 6 |
| 3.7 | EVENT ACTION PLAN | 6 |
| 4 | MONITORING METHDOLOGY | 7 |
| 4.1 | AIR QUALITY MONITORING | 7 |
| 4.2 | CONSTRUCTION NOISE MONITORING | 8 |
| 4.3 | DATA MANAGEMENT AND DATA QA/QC CONTROL | 8 |
| 5 | IMPACT MONITORING RESULTS | 9 |
| 5.1 | GENERAL | 9 |
| 5.2 | RESULTS OF AIR QUALITY MONITORING | 9 |
| 5.3 | RESULTS OF CONSTRUCTION NOISE MONITORING | 10 |
| 6 | WASTE MANAGEMENT | 11 |
| 6.1 | GENERAL WASTE MANAGEMENT | 11 |
| 6.2 | RECORDS OF WASTE QUANTITIES | 11 |
| 7 | SITE INSPECTION | 12 |
| 7.1 | REQUIREMENTS | 12 |
| 7.2 | FINDINGS / DEFICIENCIES DURING THE REPORTING MONTH | 12 |
| 8 | ENVIRONMENTAL COMPLAINT AND NON-COMPLIANCE | 13 |
| 8.1 | ENVIRONMENTAL COMPLAINT, SUMMONS AND PROSECUTION | 13 |
| 9 | IMPLEMENTATION STATUS OF MITIGATION MEASURES | 14 |
| 9.1 | GENERAL REQUIREMENTS | 14 |
| 9.2 | TENTATIVE CONSTRUCTION ACTIVITIES IN THE COMING MONTH | 14 |
| 9.3 | KEY ISSUES FOR THE COMING MONTH | 15 |
| 10 | CONCLUSIONS AND RECOMMENTATIONS | 16 |
| 10.1 | CONCLUSIONS | 16 |
| 10.2 | RECOMMENDATIONS | 16 |

LIST OF TABLES

| | |
|-----------|------------------------------------------------------------------------------------------|
| TABLE 2-1 | STATUS OF ENVIRONMENTAL LICENSES AND PERMITS |
| TABLE 3-1 | SUMMARY OF EM&A REQUIREMENTS |
| TABLE 3-2 | PROPOSED AIR QUALITY AND CONSTRUCTION NOISE MONITORING LOCATIONS |
| TABLE 3-3 | AIR QUALITY MONITORING EQUIPMENT |
| TABLE 3-4 | CONSTRUCTION NOISE MONITORING EQUIPMENT |
| TABLE 3-5 | ACTION AND LIMIT LEVELS FOR 24-HR TSP AND 1-HR TSP AIR QUALITY, $\mu\text{g}/\text{m}^3$ |
| TABLE 3-6 | ACTION AND LIMIT LEVELS FOR CONSTRUCTION NOISE |
| TABLE 5-1 | SUMMARY OF 1-HOUR TSP MONITORING RESULTS, $\mu\text{g}/\text{m}^3$ |
| TABLE 5-2 | SUMMARY OF 24-HOUR TSP MONITORING RESULTS, $\mu\text{g}/\text{m}^3$ |
| TABLE 5-3 | SUMMARY OF CONSTRUCTION NOISE MONITORING RESULTS, dB(A) |
| TABLE 6-1 | SUMMARY OF QUANTITIES OF INERT C&D MATERIALS FOR THE PROJECT |
| TABLE 6-2 | SUMMARY OF QUANTITIES OF C&D WASTES FOR THE PROJECT |
| TABLE 7-1 | SITE OBSERVATIONS |
| TABLE 8-1 | STATISTICAL SUMMARY OF ENVIRONMENTAL COMPLAINTS |
| TABLE 8-2 | STATISTICAL SUMMARY OF ENVIRONMENTAL SUMMONS |
| TABLE 8-3 | STATISTICAL SUMMARY OF ENVIRONMENTAL PROSECUTION |
| TABLE 9-1 | ENVIRONMENTAL MITIGATION MEASURES |

LIST OF APPENDICES

| | |
|------------|-------------------------------------------------------------------------------------|
| APPENDIX A | GENERAL LAYOUT OF ADVANCE WORKS AND MAIN WORKS OF SWHSTW FURTHER EXPANSION PHASE 1A |
| APPENDIX B | LAYOUT PLAN OF THE CONTRACT |
| APPENDIX C | ORGANIZATION STRUCTURE AND CONTACT DETAILS OF RELEVANT PARTIES |
| APPENDIX D | MASTER CONSTRUCTION PROGRAM OF THE CONTRACT |
| APPENDIX E | PROPOSED MONITORING LOCATIONS |
| APPENDIX F | EVENT ACTION PLAN |
| APPENDIX G | VALID CALIBRATION CERTIFICATES |
| APPENDIX H | IMPACT MONITORING SCHEDULE |
| APPENDIX I | 24-HOUR TSP AND CONSTRUCTION NOISE MONITORING DATA |
| APPENDIX J | GRAPHICAL PLOTS |
| APPENDIX K | METEOROLOGICAL DATA DURING THE REPORTING MONTH |
| APPENDIX L | MONTHLY SUMMARY WASTE FLOW TABLE |
| APPENDIX M | IMPLEMENTATION SCHEDULE FOR ENVIRONMENTAL MITIGATION MEASURES (ISEMM) |

1 INTRODUCTION

1.1 PROJECT BACKGROUND

1.1.1 The existing Shek Wu Hui Sewage Treatment Works (hereafter referred as “SWHSTW”) with secondary level treatment to sewage collected from Sheung Shui, Fanling and adjacent areas is operated and maintained by Drainage Services Department (hereafter referred as “DSD”). Based on the preliminary design of the Project, the scope of works for the Project comprises the following major components:

- (a) Demolition of the existing Inlet Works and construction of the new Inlet Works, including inlet pumping station, screening and degritting facilities;
- (b) Demolition of 4 existing circular Primary Sedimentation Tanks (PSTs) and construction of new rectangular PSTs;
- (c) Construction of new pre-membrane screens;
- (d) Modification of existing Bioreactor (BR) 1 and 2 to suit the proposed membrane bioreactor (MBR) process;
- (e) Construction of a new standby Bioreactor;
- (f) Demolition of 4 existing circular Final Sedimentation Tanks (FSTs) and construction of new Membrane Tanks and Membrane Facility Building;
- (g) Reconstruction of sludge treatment facilities, including thickening, anaerobic digestion, biogas handling, sludge holding and dewatering facilities; and
- (h) Other ancillary works.

1.1.2 According to the Project implementation programme, the construction of most of the above proposed works (hereinafter referred to as “Main Works”) will be commencement in 2016 and completion in 2022. Furthermore, Advance Works as part of the above proposed works will carry out before Main Works commencement. The Advance Works will be commencement in third quarter of 2015 and comprise the following major components:

- (a) Modification of BR1, through upgrading of electrical and mechanical (E&M) equipment and minor civil works, to suit the proposed MBR process;
- (b) Demolition of FSTs 1 and 2 and construction of Membrane Tanks and the first phase of Membrane Facility Building; and
- (c) Tree felling and transplanting, to facilitate timely construction of the new Inlet Works during the implementation of Main Works (under review).

1.1.3 The general layout of Advance Works and Main Works of SWHSTW Further Expansion Phase 1A show in [Appendix A](#). Subsequent to Further Expansion Phase 1A, the SWHSTW will be further expanded under separate projects (namely Further Expansion Phase 1B and Phase 2).

1.1.4 In July 2015, Tsun Yip Waterworks Construction Co Ltd (hereinafter referred as “Tsun Yip” or “the Contractor”) has awarded the DSD Contract No. DC/2013/09 – **Advance Works for Shek Wu Hui Sewage Treatment Works – Further Expansion Phase 1A and Sewerage Works at Ping Che Road** (hereinafter referred as “the Contract”). The Contract is the Advance Works for Shek Wu Hui Sewage Treatment Works as part of SWHSTW Further Expansion which is a Designated Project under Environmental Permit number FEP-01/474/2013 (hereinafter referred as “the FEP-01/474/2013” or “the EP”).

1.1.5 The works under the Contract at Shek Wu Hui Sewage Treatment Works will be included the conversion of one existing bioreactor and two existing final sedimentation tanks into one membrane bioreactor. Moreover, construction of about 1.5 kilometres length of sewers at Ping Che Road and other ancillary works will be undertaken. The works of Contract are scheduled to be conduct about 25 months. Layout plan of the Contract is shown in [Appendix B](#).

1.1.6 Action-United Environmental Services & Consulting (hereinafter referred as “AUES”) was

appointed by the Contractor as an Environmental Team (hereinafter referred as “the ET”) to implement the relevant EM&A program in accordance with the Updated EM&A Manual, as well as the associated duties.

- 1.1.7 As part of the EM&A program, baseline monitoring is required to determine the ambient environmental conditions. Hence baseline monitoring including air quality and noise were carried out between **28 August 2015** and **12 September 2015** at the proposed locations before construction work commencement. The “Baseline Monitoring Report (TCS00757/15/600/R0014 Version 2)” had submitted to EPD by the DSD before commencement of major construction works and approved by the IEC on 24 September 2015. Further to Tsun Yip’s instructions, the EM&A program was commenced on 1 October 2015 and the monitoring schedule had been issued to relevant parties on 29 September 2015.
- 1.1.8 This is the **12nd** Monthly EM&A Report presenting the monitoring results and inspection findings for the reporting period from **1** to **30 September 2016**.

1.2 REPORT STRUCTURE

- 1.2.1 The Monthly Environmental Monitoring and Audit (EM&A) Report is structured into the following sections:-

| | |
|-------------------|-------------------------------------------------------|
| SECTION 1 | INTRODUCTION |
| SECTION 2 | PROJECT ORGANIZATION AND CONSTRUCTION PROGRESS |
| SECTION 3 | SUMMARY OF MONITORING REQUIREMENTS |
| SECTION 4 | IMPACT MONITORING RESULTS |
| SECTION 5 | WASTE MANAGEMENT |
| SECTION 6 | SITE INSPECTIONS |
| SECTION 7 | ENVIRONMENTAL COMPLAINTS AND NON-COMPLIANCE |
| SECTION 8 | IMPLEMENTATION STATUES OF MITIGATION MEASURES |
| SECTION 9 | IMPACT FORECAST |
| SECTION 10 | CONCLUSIONS AND RECOMMENDATION |

2 PROJECT ORGANIZATION AND CONSTRUCTION PROGRESS

2.1 PROJECT ORGANIZATION AND MANAGEMENT STRUCTURE

2.1.1 Organization structure and contact details of relevant parties with respect to on-site environmental management are shown in [Appendix C](#).

2.2 CONSTRUCTION PROGRESS

2.1.2 Master Construction Program of the Contract is enclosed in [Appendix D](#) and the major construction activities undertaken in this Reporting Month are illustrated in [Appendix B](#) and listed below:-

- Concreting the pile cap and base slab (At Membrane Facilities Building)
- Erection and dismantle formwork (At Membrane Facilities Building)
- Installation of sheet pile, open excavation and installation of DN900 (Near Final Sedimentation Tank No.5)
- Installation of steel plate to block the sewage flow (At common liquor channel)
- Laying HBCA No.5 and Construction of Field Equipment Pit#1 & Pedestrian Trial Panel (V.O.6 Porous Pavement)

2.3 SUMMARY OF ENVIRONMENTAL SUBMISSIONS

2.1.3 Summary of the relevant permits, licences, and/or notifications on environmental protection for this Project in this Reporting Period is presented in [Table 2-1](#).

Table 2-1 Status of Environmental Licenses and Permits

| Item | Description | License/Permit Status |
|------|------------------------------------------------------------------------------|----------------------------------------------------------|
| 1 | Air Pollution Control (Construction Dust) Regulation | Notified EPD on 30 July 2015 |
| 2 | Chemical waste Producer Registration (WPN: 5213-624-T3148-04) | Application date: 19/08/2015 Date approved: 18/9/2015 |
| 3 | Water Pollution Control Ordinance (Discharge License: WT00022503-2015) | Application date: 19/08/2015 Date approved: 18/9/2015 |
| 4 | Billing Account for Disposal of Construction Waste (Account Number: 7022898) | Granted on 02/09/2015 |

2.1.4 In accordance with the Further EP No. FEP-01/474/2013 Condition 2.3, an Updated Environmental Monitoring and Audit (EM&A) Manual (TCS00757/15/600/R0012v3) which certified by the Environmental Team (ET) Leader and verified by the Independent Environmental Checker (IEC), has submitted to DSD and EPD endorsement.

2.1.5 Baseline Monitoring Report (TCS00757/15/600/R0014v2) as certified by the ETL and verified by the IEC was submitted to the EPD on 24 September 2015 for endorsement.

3 SUMMARY OF IMPACT MONITORING REQUIREMENT**3.1 GENERAL**

3.1.1 The Environmental Monitoring and Audit requirements are set out in the Updated EM&A manual. Environmental issues such as air quality and construction noise were identified as the key issues during the construction phase of Advance Works of the Project.

3.1.2 A summary of EM&A programme of construction phase are presented in the sub-sections below.

3.2 MONITORING PARAMETERS

3.2.1 The EM&A programme of construction phase shall cover the following environmental issues:

- Air quality; and
- Construction noise

3.2.2 A summary of the monitoring parameters is presented in *Table 3-1* below

Table 3-1 Summary of EM&A Requirements

| Environmental Issue | Parameters |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Air Quality | <ul style="list-style-type: none"> • 1-hour TSP by Real-Time Portable Dust Meter; and • 24-hour TSP by High Volume Air Sampler. |
| Construction Noise | <ul style="list-style-type: none"> • $L_{eq(30min)}$ during normal working hours; and • $L_{eq(15min)}$ for the construction works undertaken in Restricted Hours, if necessary. |

3.3 MONITORING LOCATIONS

3.3.1 According to the *Updated EM&A Manual of Advance Works* which submitted to EPD on **25 August 2015**, three air quality sensitive receivers and two construction noise sensitive receivers are proposed to monitor the environmental performance of the Contract. The proposed monitoring locations are summarized in *Table 3-2* and shown in *Appendix E*.

Table 3-2 Proposed Air Quality and Construction Noise Monitoring Locations

| Aspect | Station ID | Location | Parameter |
|-------------|------------|----------------------|--------------------------|
| Air Quality | AM1 | No. 31 Wai Loi Tsuen | 1- hour and 24- hour TSP |
| | AM2 | Fu Tei Au | 1- hour |
| | AM2a | RE's Site Office | 24- hour TSP |
| Noise | NM1 | No. 31 Wai Loi Tsuen | $L_{eq(30min)}$ |
| | NM2 | Fu Tei Au | $L_{eq(30min)}$ |

3.4 MONITORING FREQUENCY AND PERIOD

3.4.1 The requirements of baseline monitoring are stipulated in *Sections 2.1.7 and 3.2.5* of the Updated EM&A Manual and presented as follows.

Air Quality Monitoring

3.4.2 Monitoring frequency for air quality baseline monitoring is as follows:

- 1-Hour TSP 3 sets of 1-hour TSP monitoring shall be carried out once in every six days.
- 24-Hour TSP 24-hour shall be carried out once in every six days.

Noise Monitoring

3.4.3 Construction noise monitoring should be carried out at the designated monitoring station when there are Project-related construction activities being undertaken within a radius of 300m from the monitoring stations. The monitoring frequency should depend on the scale of the

construction activities. An initial guide on the monitoring is to obtain one set of 30-minute measurement at each station between 0700 and 1900 hours on normal weekdays at a frequency of once a week when construction activities are underway.

- 3.4.4 If construction works are extended to include works during the hours of 1900 - 0700, additional weekly impact monitoring shall be carried out during evening and night-time works. Applicable permits under NCO shall be obtained by the Contractor.

3.5 MONITORING EQUIPMENT

Air Quality Monitoring

- 3.5.1 The 24-hour and 1-hour TSP levels shall be measured by following the standard high volume sampling method as set out in the *Title 40 of the Code of Federal Regulations, Chapter 1 (Part 50), Appendix B*. If the ET proposes to use a direct reading dust meter to measure 1-hour TSP levels, it shall submit sufficient information to the IEC to approve.
- 3.5.2 The filter paper of 24-hour TSP measurement shall be determined by HOKLAS accredited laboratory.
- 3.5.3 All equipment as used air quality monitoring is listed in **Table 3-3**.

Table 3-3 Air Quality Monitoring Equipment

| Equipment | Model |
|-------------------------|-----------------------------------------------------------------|
| 24-Hr TSP | |
| High Volume Air Sampler | TISCH High Volume Air Sampler, HVS Model TE-5170 |
| Calibration Kit | TISCH Model TE-5025A |
| 1-Hour TSP | |
| Portable Dust Meter | Sibata LD-3 Laser Dust monitor Particle Mass Profiler & Counter |

Wind Data Monitoring Equipment

- 3.5.4 According to the Updated EM&A Manual Sections 2.1.3.8, alternative methods to obtain representative wind data was proposed by the ET. Meteorological information as extracted from “the Hong Kong Observatory Ta Kwu Ling Station” is alternative method to obtain representative wind data. For Ta Kwu Ling Station, it is located nearby the Project site. Moreover, this station is situated the sea level above 15mPD. The station’s wind data monitoring equipment is set above the existing ground ten meters in compliance with the general setting up requirement. Furthermore, this station can also provide the humidity, rainfall, and air pressure and temperature etc. meteorological information. In a lot of Hong Kong development projects, weather information extracted from Hong Kong Observatory is a common alternative method if installation of weather station is not allowed.

Noise Monitoring

- 3.5.5 Sound level meter in compliance with the International Electrotechnical Commission Publications 651: 1979 (Type 1) and 804: 1985 (Type 1) specifications shall be used for carrying out the noise monitoring. The sound level meter shall be checked using an acoustic calibrator. The wind speed shall be checked with a portable wind speed meter capable of measuring the wind speed in m s^{-1} .
- 3.5.6 Noise monitoring equipment to be used for impact monitoring is listed in **Table 3-4**.

Table 3-4 Construction Noise Monitoring Equipment

| Equipment | Model |
|-------------------------------|---------------------|
| Integrating Sound Level Meter | Rion NL-52 |
| Calibrator | Rion NC-73 / BK4231 |
| Portable Wind Speed Indicator | Testo Anemometer |

- 3.5.7 Sound level meters listed above comply with the *International Electrotechnical Commission Publications 651: 1979 (Type 1)* and *804: 1985 (Type 1)* specifications, as recommended in TM issued under the NCO. The acoustic calibrator and sound level meter to be used in the baseline monitoring will be calibrated yearly.

3.6 DETERMINATION OF ACTION/LIMIT (A/L) LEVELS

- 3.6.1 According to the baseline monitoring results and the Updated EM&A Manual, the air quality and construction noise criteria were set up, namely Action and Limit levels are listed in **Tables 3-5 & 3-6** as below.

Table 3-5 Action and Limit Levels for 24-Hr TSP and 1-Hr TSP Air Quality, $\mu\text{g m}^{-3}$

| Monitoring Stations | Action Level ($\mu\text{g/m}^3$) | | Limit Level ($\mu\text{g/m}^3$) | |
|---------------------|------------------------------------|---------|-----------------------------------|---------|
| | 1-hour | 24-hour | 1-hour | 24-hour |
| AM1 | 286 | 147 | 500 | 260 |
| AM2 | 276 | NA | 500 | NA |
| AM2a | NA | 155 | NA | 260 |

Table 3-6 Action and Limit Levels for Construction Noise

| Monitoring Stations | Action Level | Limit Level in dB(A) |
|-------------------------------------------------|-------------------------------------------|----------------------|
| Time Period: 0700-1900 hours on normal weekdays | | |
| NM1 and NM2 | When one documented complaint is received | > 75* dB(A) |

Note: (*) Reduces to 70 dB(A) for schools and 65 dB(A) during the school examination periods.

3.7 EVENT ACTION PLAN

- 3.7.1 If non-compliance or exceedance of the Action/Limit Levels is occurred, actions shall be taken in accordance with the Event Action Plan in **Appendix F**.

4 MONITORING METHDOLOGY

4.1 AIR QUALITY MONITORING

Monitoring Location

- 4.1.1 The detailed information of air quality monitoring stations referred to *Table 3-2* and the graphical plot of monitoring locations shown in *Appendix E* in this report.

Monitoring Equipment

- 4.1.2 All the monitoring equipment to be used in the EM&A program as listed in *Table 3-3* has been agreed with the IEC.

Monitoring Procedures

1-hour TSP

- 4.1.3 The 1-hour TSP monitor, a Sibata LD-3 Laser Dust monitor Particle Mass Profiler & Counter was used for baseline monitoring, which is a portable, battery-operated laser photometer. The 1-hour TSP meter provides a real time 1-hour TSP measurement based on 90⁰ light scattering. The 1-hour TSP monitor consisted of the following:

- a. A pump to draw sample aerosol through the optic chamber where TSP is measured;
- b. A sheath air system to isolate the aerosol in the chamber to keep the optics clean for maximum reliability; and
- c. A built-in data logger compatible with Windows based program to facilitate data collection, analysis and reporting.

- 4.1.4 The 1-hour TSP meter used is within the valid period, calibrated by the manufacturer prior to purchasing. Zero response of the instrument was checked before and after each monitoring event. Operation of the 1-hour TSP meter was follow manufacturer's Operation and Service Manual. A valid calibration certificate is attached in *Appendix G*.

24-hour TSP

- 4.1.5 The equipment used for 24-hour TSP measurement is a Tisch Environmental, Inc. Model TE-5170 TSP high volume air sampling system, which complied with EPA Code of Federal Regulation, Appendix B to Part 50. The High Volume Air Sampler (HVS) consists of the following:

- a. An anodized aluminum shelter;
- b. A 8"x10" stainless steel filter holder;
- c. A blower motor assembly;
- d. A continuous flow/pressure recorder;
- e. A motor speed-voltage control/elapsed time indicator;
- f. A 7-day mechanical timer, and
- g. A power supply of 220v/50 hz

- 4.1.6 Prior to 24-hour TSP monitoring, the HVS was calibrated in accordance with the manufacturer's instruction using the NIST-certified standard calibrator (Tisch Calibration Kit Model TE-5028A). The 24-hour TSP Monitoring using the HVS was also processed in accordance with the manufacturer's Operations Manual. A valid calibration certificate of the calibration kit with the certificate of HVS calibrated is attached in *Appendix G*.

- 4.1.7 24-hour TSP was collected by the ET on filters of HVS and quantified by a local HOKLAS accredited laboratory, ALS Technichem (HK) Pty Ltd (ALS), upon receipt of the samples. The ET keeps all the sampled 24-hour TSP filters in normal air conditioned room conditions, i.e. 70% HR (Relative Humidity) and 25°C, for six months prior to disposal.

4.2 CONSTRUCTION NOISE MONITORING

Monitoring Location

- 4.2.1 The detailed information of construction noise monitoring stations referred to **Table 3-2** and the graphical plot of monitoring locations shown in **Appendix E** in this report.

Monitoring Equipment

- 4.2.2 All the monitoring equipment to be used in the EM&A program as listed in **Table 3-3** has been agreed with the IEC.
- 4.2.3 Sound level meter listed in **Table 3-4** is complied with the International Electrotechnical Commission Publications 651: 1979 (Type 1) and 804: 1985 (Type 1) specifications, as recommended in Technical Memorandum (TM) issued under the Noise Control Ordinance (NCO). A valid of calibration certificates including sound level meter and an acoustic were shown in **Appendix G**.

Monitoring Procedures

- 4.2.4 The noise measurement was performed with the meter set to FAST response and on the A-weighted equivalent continuous sound pressure level (Leq). Leq(30min) in six consecutive Leq(5 min) measurements were used as the monitoring parameter throughout the baseline monitoring period.
- 4.2.5 During the monitoring, the sound level meter was mounted on a tripod at a height of about 1.2 m and placed at the monitoring locations and oriented such that the microphone was pointed to the site with the microphone facing perpendicular to the line of sight. The windshield was fitted for the measurement. For construction noise monitoring, all monitoring stations were conducted 1 m from the exterior of the building façade.
- 4.2.6 Prior to noise measurement, the accuracy of the sound level meter was checked using an acoustic calibrator generating a known sound pressure level at a known frequency. The calibration level from before and after the noise measurement agrees to within 1.0dB.
- 4.2.7 During the noise measurement, a portable wind speed meter was used to check wind speed (m/s). For impact noise monitoring, no wind speed was exceeding 5m/s or gusts exceeding 10m/s. Also, noise measurement in time was no fog and rain.

4.3 DATA MANAGEMENT AND DATA QA/QC CONTROL

- 4.3.1 The monitoring data were handled by the ET's in-house data recording and management system.
- 4.3.2 The monitoring data recorded in the equipment were downloaded directly from the equipment at the end of each monitoring day. The downloaded monitoring data were input into a computerized database properly maintained by the ET. The laboratory results were input directly into the computerized database and checked by personnel other than those who input the data.
- 4.3.3 For monitoring parameters that require laboratory analysis, the local laboratory shall follow the QA/QC requirements as set out under the HOKLAS scheme for the relevant laboratory tests.

5 IMPACT MONITORING RESULTS**5.1 GENERAL**

5.1.1 Air quality and construction noise monitoring scheduled in the Reporting Period is enclosed in *Appendix H* and the monitoring results are shown in the following sub-sections.

5.2 RESULTS OF AIR QUALITY MONITORING

5.2.1 The results for 24-hour and 1-hour TSP are summarized in *Tables 5-1 to 5-2*. The 24-hour TSP data are shown in *Appendix I* and graph plots including 1-hour TSP and 24-hour TSP are shown in *Appendix J*.

Table 5-1 Summary of 1-Hour TSP Monitoring Results, $\mu\text{g}/\text{m}^3$

| DATE | AM1 | | | | AM2 | | | |
|-----------------|-------------------------------|-----------------------|-----------------------|-----------------------|-------------------------------|-----------------------|-----------------------|-----------------------|
| | Start Time | 1 st Meas. | 2 nd Meas. | 3 rd Meas. | Start Time | 1 st Meas. | 2 nd Meas. | 3 rd Meas. |
| 5-Sep-16 | 9:30 | 36 | 33 | 35 | 9:40 | 39 | 37 | 35 |
| 10-Sep-16 | 9:41 | 41 | 40 | 41 | 9:47 | 45 | 43 | 35 |
| 15-Sep-16 | 9:38 | 46 | 51 | 49 | 13:31 | 68 | 62 | 64 |
| 21-Sep-16 | 9:58 | 42 | 48 | 52 | 13:35 | 66 | 58 | 57 |
| 27-Sep-16 | 9:39 | 55 | 52 | 64 | 13:41 | 79 | 73 | 68 |
| Average (Range) | 46 (33 - 64) | | | | 55 (35 - 79) | | | |

Table 5-2 Summary of 24-hour TSP Monitoring Results, $\mu\text{g}/\text{m}^3$

| Date | AM1 | AM2a |
|-----------------|--------------------------------|-------------------------------|
| 2-Sep-16 | 28 | 11 |
| 8-Sep-16 | 48 | 19 |
| 14-Sep-16 | 50 | 46 |
| 20-Sep-16 | 45 | 46 |
| 26-Sep-16 | 29 | 37 |
| 30-Sep-16 | 126 | 63 |
| Average (Range) | 55 (28 – 126) | 37 (11 – 63) |

5.2.2 As shown in *Tables 5-1* and *5-2*, the 24-hour and 1-hour TSP monitoring results were below the Action/ Limit Level. No Notification of Exceedances (NOE) of air quality criteria or corrective action was therefore required.

5.2.3 The meteorological data during the Reporting Month is summarized in *Appendix K*.

5.2.4 Construction dust assessment for short term impact was undertaken in the EIA study. In view of the current contract, monitoring locations AM1 and AM2a are not an ASR during the EIA study and therefore no prediction was made. For 1-hour TSP monitoring location AM2, it is very near the assessment point FLN-E13 in the EIA. According to the EIA prediction, the predicted result for Tier 2 in assessment year 2018 is $91.0\mu\text{g}/\text{m}^3$ for 1-hour TSP and the cumulative 1-hour concentrations would comply with the respective criteria and adverse short-term construction dust impact is not anticipated. It is concluded that the overall 1-hour TSP monitoring result in the Reporting Period is comparable to the EIA prediction.

5.3 RESULTS OF CONSTRUCTION NOISE MONITORING

- 5.3.1 In the Reporting Period, a total of 8 event noise measurements were carried out at the two designated locations. During construction noise monitoring, the sound level meter was set in 1m from the exterior of the building façade. Therefore, no façade correction (+3dB(A)) is added according to acoustical principles and EPD guidelines. The construction noise monitoring results at the designated locations are summarized in **Table 5-3**. The detailed noise monitoring data are presented in **Appendix I** and the relevant graphical plots are shown in **Appendix J**.

Table 5-3 Summary of Construction Noise Monitoring Results, dB(A)

| Date | NM1 | | NM2 | |
|--------------------|---------------------|-------------------|---------------------|-------------------|
| | Time of Measurement | ($L_{eq30min}$) | Time of Measurement | ($L_{eq30min}$) |
| 5-Sep-16 | 9:30 | 60 | 10:45 | 56 |
| 15-Sep-16 | 9:52 | 56 | 13:38 | 49 |
| 21-Sep-16 | 10:02 | 56 | 13:52 | 49 |
| 27-Sep-16 | 9:58 | 55 | 13:56 | 50 |
| Limit Level | 75 dB(A) | | | |

- 5.3.2 As shown in **Table 5-3**, the noise level measured at the designated monitoring locations are well below 75dB(A). Furthermore, there was no noise complaints (Action Level exceedance) received by the RE, Contractors or DSD in the Reporting Period. Therefore, no Action or Limit Level exceedance was triggered and no corrective action was required.

6 WASTE MANAGEMENT**6.1 GENERAL WASTE MANAGEMENT**

- 6.1.1 Waste management was carried out by an on-site Environmental Officer or an Environmental Supervisor from time to time.

6.2 RECORDS OF WASTE QUANTITIES

- 6.2.1 All types of waste arising from the construction work are classified into the following:

- Construction & Demolition (C&D) Material;
- Chemical Waste;
- General Refuse; and
- Excavated Soil.

- 6.2.2 The quantities of waste for disposal in this Reporting Period are summarized in **Tables 6-1** and **6-2** and the Monthly Summary Waste Flow Table is shown in **Appendix L**. Whenever possible, materials were reused on-site as far as practicable.

Table 6-1 Summary of Quantities of Inert C&D Materials for the Project

| Type of Waste | Quantity | | | Disposal Location |
|----------------------------------------------------------------------|--------------|-----------------|-----------|-------------------|
| | Prior Months | Reporting Month | Cumulated | |
| Total C&D Materials (Inert) (in '000m ³) | 11.997 | 0.529 | 12.526 | -- |
| Hard Rock and Large Broken Concrete (Inert) (in '000m ³) | 1.289 | 0 | 1.289 | -- |
| Reused in this Project (Inert) (in '000 m ³) | 0.772 | 0.100 | 0.872 | -- |
| Reused in other Projects (Inert) (in '000 m ³) | 2.228 | 0 | 2.228 | -- |
| Disposal as Public Fill (Inert) (in '000 m ³) | 7.708 | 0.429 | 8.137 | Tuen Mun 38 |

Table 6-2 Summary of Quantities of C&D Wastes for the Project

| Type of Waste | Quantity | | | Disposal Location |
|---------------------------------------|--------------|-----------------|-----------|-------------------|
| | Prior Months | Reporting Month | Cumulated | |
| Metals ('000kg) | 118.23 | 0 | 118.23 | -- |
| Paper / Cardboard Packing ('000kg) | 0 | 0 | 0 | -- |
| Plastics ('000kg) | 0 | 0 | 0 | -- |
| Chemical Wastes ('000kg) | 0 | 0 | 0 | -- |
| General Refuses ('000m ³) | 0.131 | 0.008 | 0.139 | NENT |

7 SITE INSPECTION**7.1 REQUIREMENTS**

- 7.1.1 According to the Updated EM&A Manual, the environmental site inspection shall be formulated by ET Leader. Weekly environmental site inspections should carry out to confirm the environmental performance.

7.2 FINDINGS / DEFICIENCIES DURING THE REPORTING MONTH

- 7.2.1 In the Reporting Period, joint site inspection to evaluate the site environmental performance by the RE, ET and the Contractor has been carried out on **6, 12, 19 and 27 September 2016**. Furthermore, IEC attend site inspection was on **27 September 2016**. No non-compliance was noted.
- 7.2.2 Observations for the site inspections and monthly audit within this Reporting Period are summarized in **Table 7-1**.

Table 7-1 Site Observations

| Date | Findings / Deficiencies | Follow-Up Status |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| 30 August 2016 | <ul style="list-style-type: none"> Crane idling without engine turned off was observed. The Contractor should turn off the idling vehicle to reduce air impact on site. The Contractor was reminded to remove the spilled chemical and treat as chemical waste at MFB to avoid land contamination. | <ul style="list-style-type: none"> No idling vehicle was observed on-site. Not required for reminder. |
| 6 September 2016 | <ul style="list-style-type: none"> The contractor was reminded to clean the stagnant water on-site after raining. | <ul style="list-style-type: none"> Not required for reminder. |
| 12 September 2016 | <ul style="list-style-type: none"> Accumulation of general waste was observed. The contractor was advised to dispose it regularly. The Contractor was cover stockpiles with tarpaulin sheet. | <ul style="list-style-type: none"> General waste was disposed. Not required for reminder. |
| 19 September 2016 | <ul style="list-style-type: none"> The Contractor was reminded to spray water at unpaved dry work area. | <ul style="list-style-type: none"> Not required for reminder. |
| 27 September 2016 | <ul style="list-style-type: none"> The Contractor was reminded to provide sufficient disposal facilities for general refuse on site. | <ul style="list-style-type: none"> Not required for reminder. |

- 7.2.3 In the Reporting Period, the overall environmental performance was considered satisfactory.

8 ENVIRONMENTAL COMPLAINT AND NON-COMPLIANCE**8.1 ENVIRONMENTAL COMPLAINT, SUMMONS AND PROSECUTION**

- 8.1.1 No environmental complaint, summons and prosecution was received in this reporting period. The statistical summary table of environmental complaint is presented in [Tables 8-1, 8-2](#) and [8-3](#).

Table 8-1 Statistical Summary of Environmental Complaints

| Reporting Period | Environmental Complaint Statistics | | |
|------------------------|------------------------------------|------------|------------------|
| | Frequency | Cumulative | Complaint Nature |
| 1 to 30 September 2016 | 0 | 0 | NA |

Table 8-2 Statistical Summary of Environmental Summons

| Reporting Period | Environmental Summons Statistics | | |
|------------------------|----------------------------------|------------|------------------|
| | Frequency | Cumulative | Complaint Nature |
| 1 to 30 September 2016 | 0 | 0 | NA |

Table 8-3 Statistical Summary of Environmental Prosecution

| Reporting Period | Environmental Prosecution Statistics | | |
|------------------------|--------------------------------------|------------|------------------|
| | Frequency | Cumulative | Complaint Nature |
| 1 to 30 September 2016 | 0 | 0 | NA |

9 IMPLEMENTATION STATUS OF MITIGATION MEASURES**9.1 GENERAL REQUIREMENTS**

- 9.1.1 The environmental mitigation measures that recommended in the Implementation Schedule for Environmental Mitigation Measures (ISEMM) in the Updated EM&A Manual covered the issues of dust, noise, water and waste and they are summarized presented in **Appendix M**.
- 9.1.2 The Contract under the Project shall be implementing the required environmental mitigation measures according to the Updated EM&A Manual as subject to the site condition. Environmental mitigation measures generally implemented by the Contract in this Reporting Period are summarized in **Table 9-1**.

Table 9-1 Environmental Mitigation Measures

| Issues | Environmental Mitigation Measures |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Water Quality | <ul style="list-style-type: none"> Wastewater to be treated by the filtration systems i.e. sedimentation tank before to discharge. |
| Air Quality | <ul style="list-style-type: none"> Maintain wet surface on access road All vehicles must be used wheel washing facility before off site Spray water during breaking works A cleaning truck was regularly performed on the public road to prevent fugitive dust emission |
| Noise | <ul style="list-style-type: none"> Restrain operation time of plants from 07:00 to 19:00 on any working day except for Public Holiday and Sunday. Keep good maintenance of plants Shut down the plants when not in used. |
| Waste and Chemical Management | <ul style="list-style-type: none"> On-site sorting prior to disposal Follow requirements and procedures of the “Trip-ticket System” Predict required quantity of concrete accurately Collect the unused fresh concrete at designated locations in the sites for subsequent disposal |
| General | <ul style="list-style-type: none"> The site was generally kept tidy and clean. |

- 9.1.3 Based on monitoring results including air quality and construction noise, it is considered that the environmental mitigation measures implemented by the Contractor in this Reporting Period are effective.

9.2 TENTATIVE CONSTRUCTION ACTIVITIES IN THE COMING MONTH

- 9.2.1 Construction activities listed below will be undertaken in in the coming month for the Contract of the Project.
- Excavation to formation level (At Membrane Tank)
 - Laying blinding layer (At Membrane Tank)
 - Re-bar fixing and erection of formwork for pile cap (At Membrane Tank)
 - Concreting the pile cap and base slab (At membrane tank)
 - Installation of sheet pile, open excavation and installation of DN900 (Near Final Sedimentation Tank No.5)
 - Erection of working platform (At Bioreactor No.1)
 - Dismantle and removal of existing equipment (At Bioreactor No.1)
 - Construction of Trial Panel#2 (V.O.6 Porous Pavement)

9.3 KEY ISSUES FOR THE COMING MONTH

9.3.1 Key issues to be considered in the coming month for the Contract include:

- Implementation of dust suppression measures at all times;
- Potential fugitive dust quality impact due from the dry/loose/exposure soil surface/dusty material;
- Ensure dust suppression measures are implemented properly;
- Implementation of construction noise preventative control measures;
- Management of chemical wastes;
- Follow-up of improvement on general waste management issues; and
- Potential wastewater quality impact due to surface runoff

10 CONCLUSIONS AND RECOMMENTATIONS

10.1 CONCLUSIONS

10.1.1 This is the **12nd** Monthly EM&A report, covering the construction period from **1 to 30 September 2016**.

10.1.2 No 24-hour or 1-hour TSP monitoring results that triggered the Action or Limit Levels were recorded. No NOEs or the associated corrective actions were therefore issued.

10.1.3 No noise complaint (which is an Action Level exceedance) was received and no construction noise measurement results that exceeded the Limit Level were recorded in this Reporting Period. No NOEs or the associated corrective actions were therefore issued.

10.1.4 No documented complaint, notification of summons or successful prosecution was received.

10.1.5 In the Reporting Period, joint site inspection to evaluate the site environmental performance by the RE, ET and the Contractor was carried out on **6, 12, 19 and 27 September 2016**. Furthermore, IEC attend site inspection was on **27 September 2016**. No non-compliance was noted.

10.1.6 No site inspection was undertaken by any external party in this Reporting Period.

10.2 RECOMMENDATIONS


10.2.1 As dry season is approaching, special attention should be paid on the potential construction dust impact since most of the construction sites are adjacent to villages. The Contractor should fully implement the construction dust mitigation measures properly.


10.2.2 Moreover, air quality mitigation measures including wheel wash facilities, watering of haul roads and covering of dusty materials with tarpaulin sheet, etc. should be properly maintained.

10.2.3 To control the site performance on waste management, Tsun Yip shall ensure that all solid and liquid waste management works are fully in compliance with the relevant license/permit requirements, such as the effluent discharge licence and the chemical waste producer registration. Tsun Yip is also reminded to implement the recommended environmental mitigation measures according to the Updating Environmental Monitoring and Audit Manual.

Appendix A

GENERAL LAYOUT OF ADVANCE WORKS AND MAIN WORKS OF SWHSTW FURTHER EXPANSION PHASE 1A

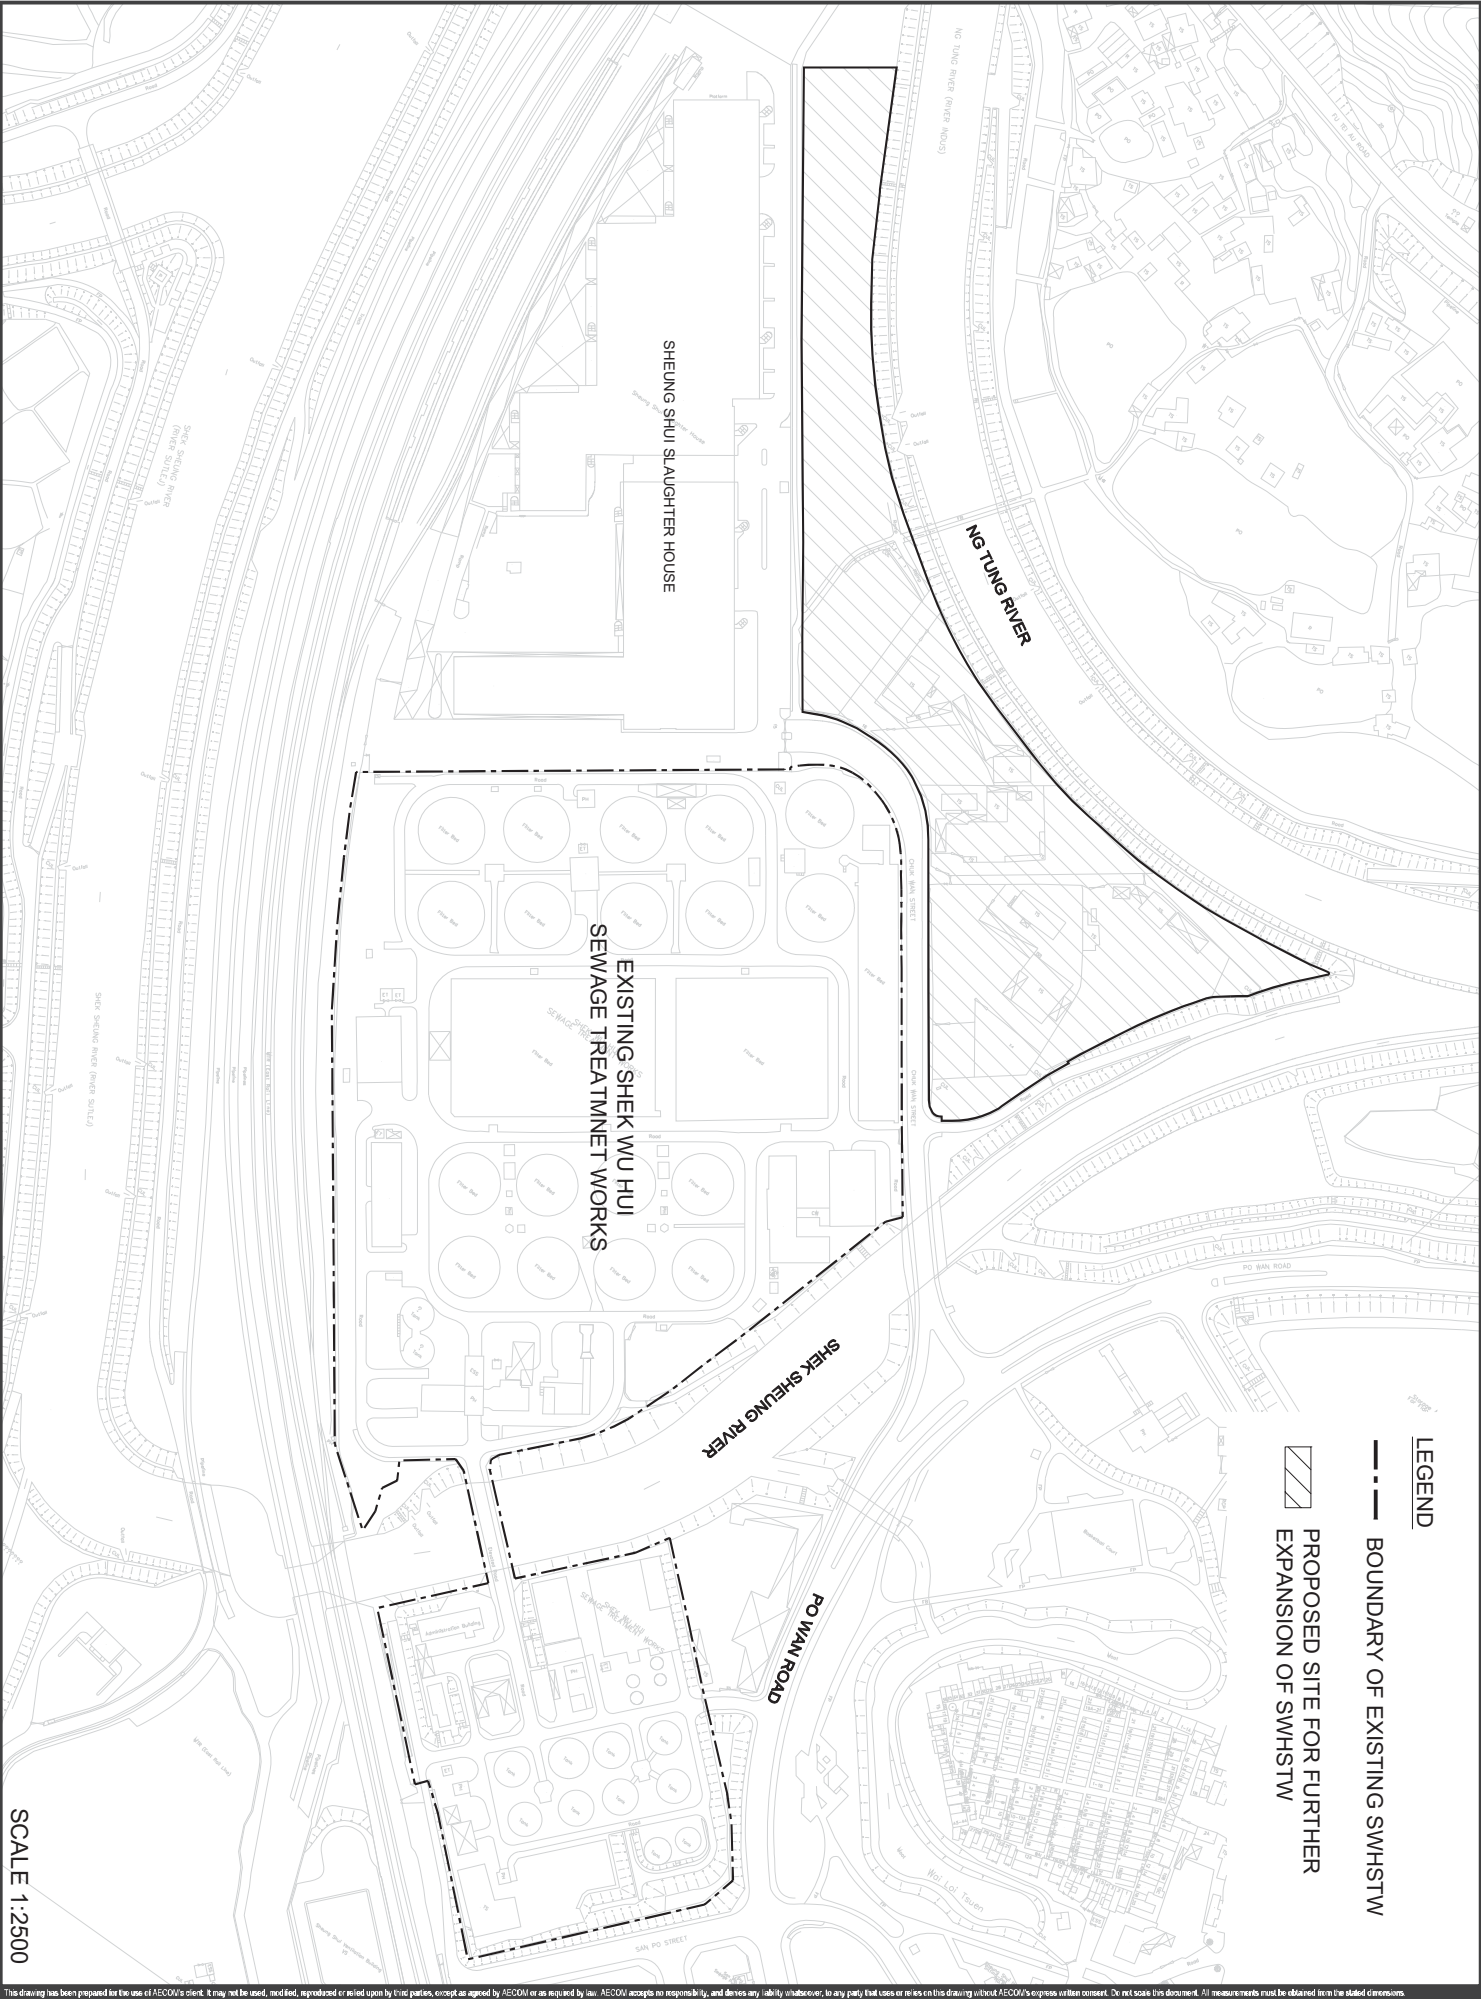


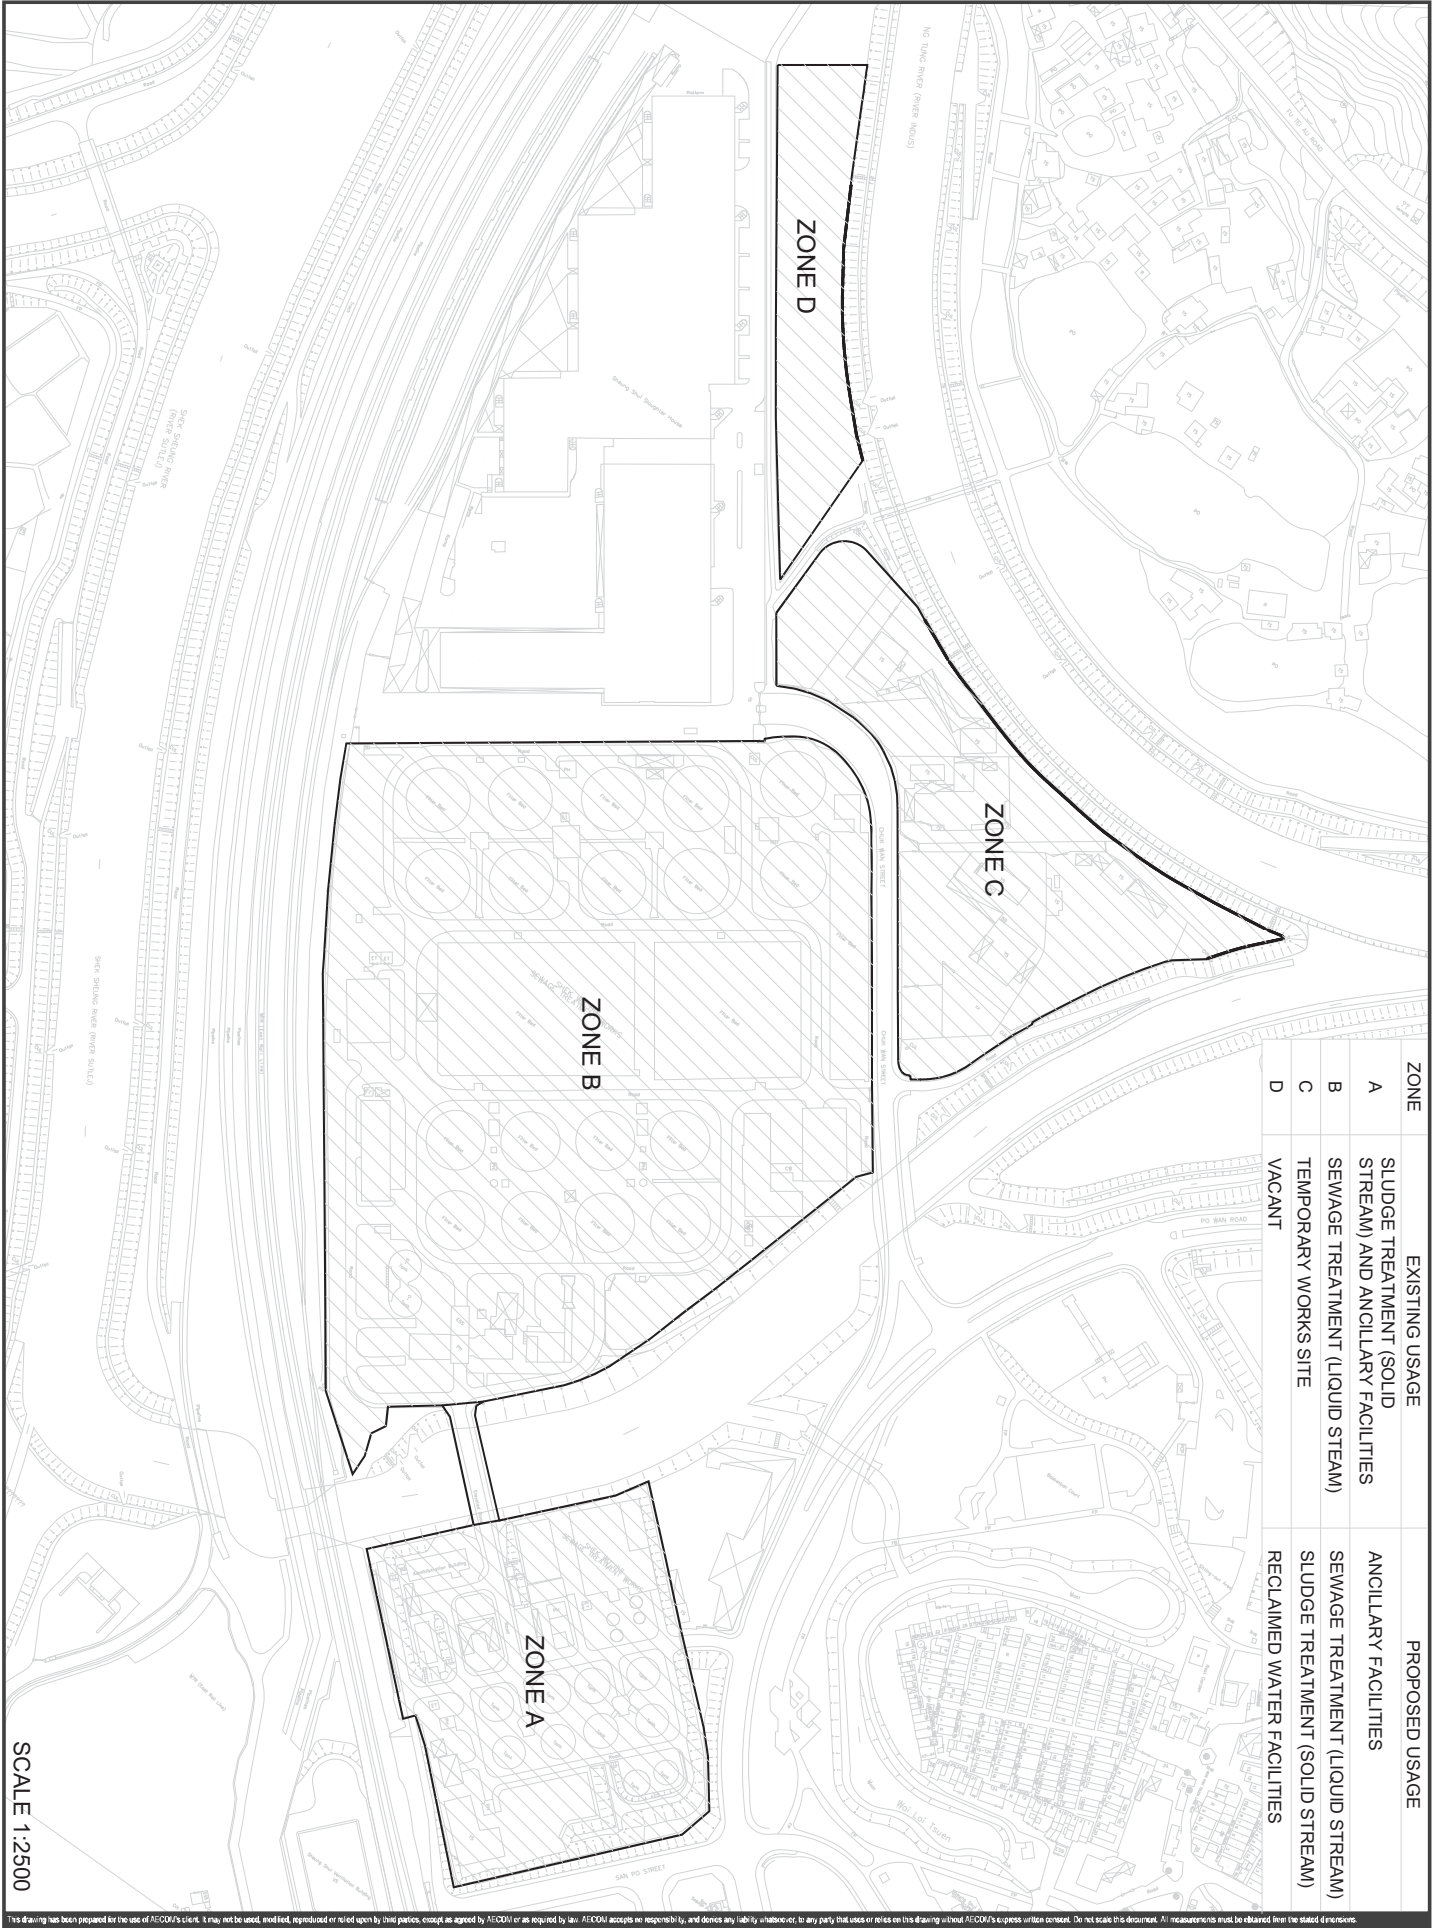

SCALE 1:2500

Appendix B

LAYOUT PLAN OF ADVANCE WORKS

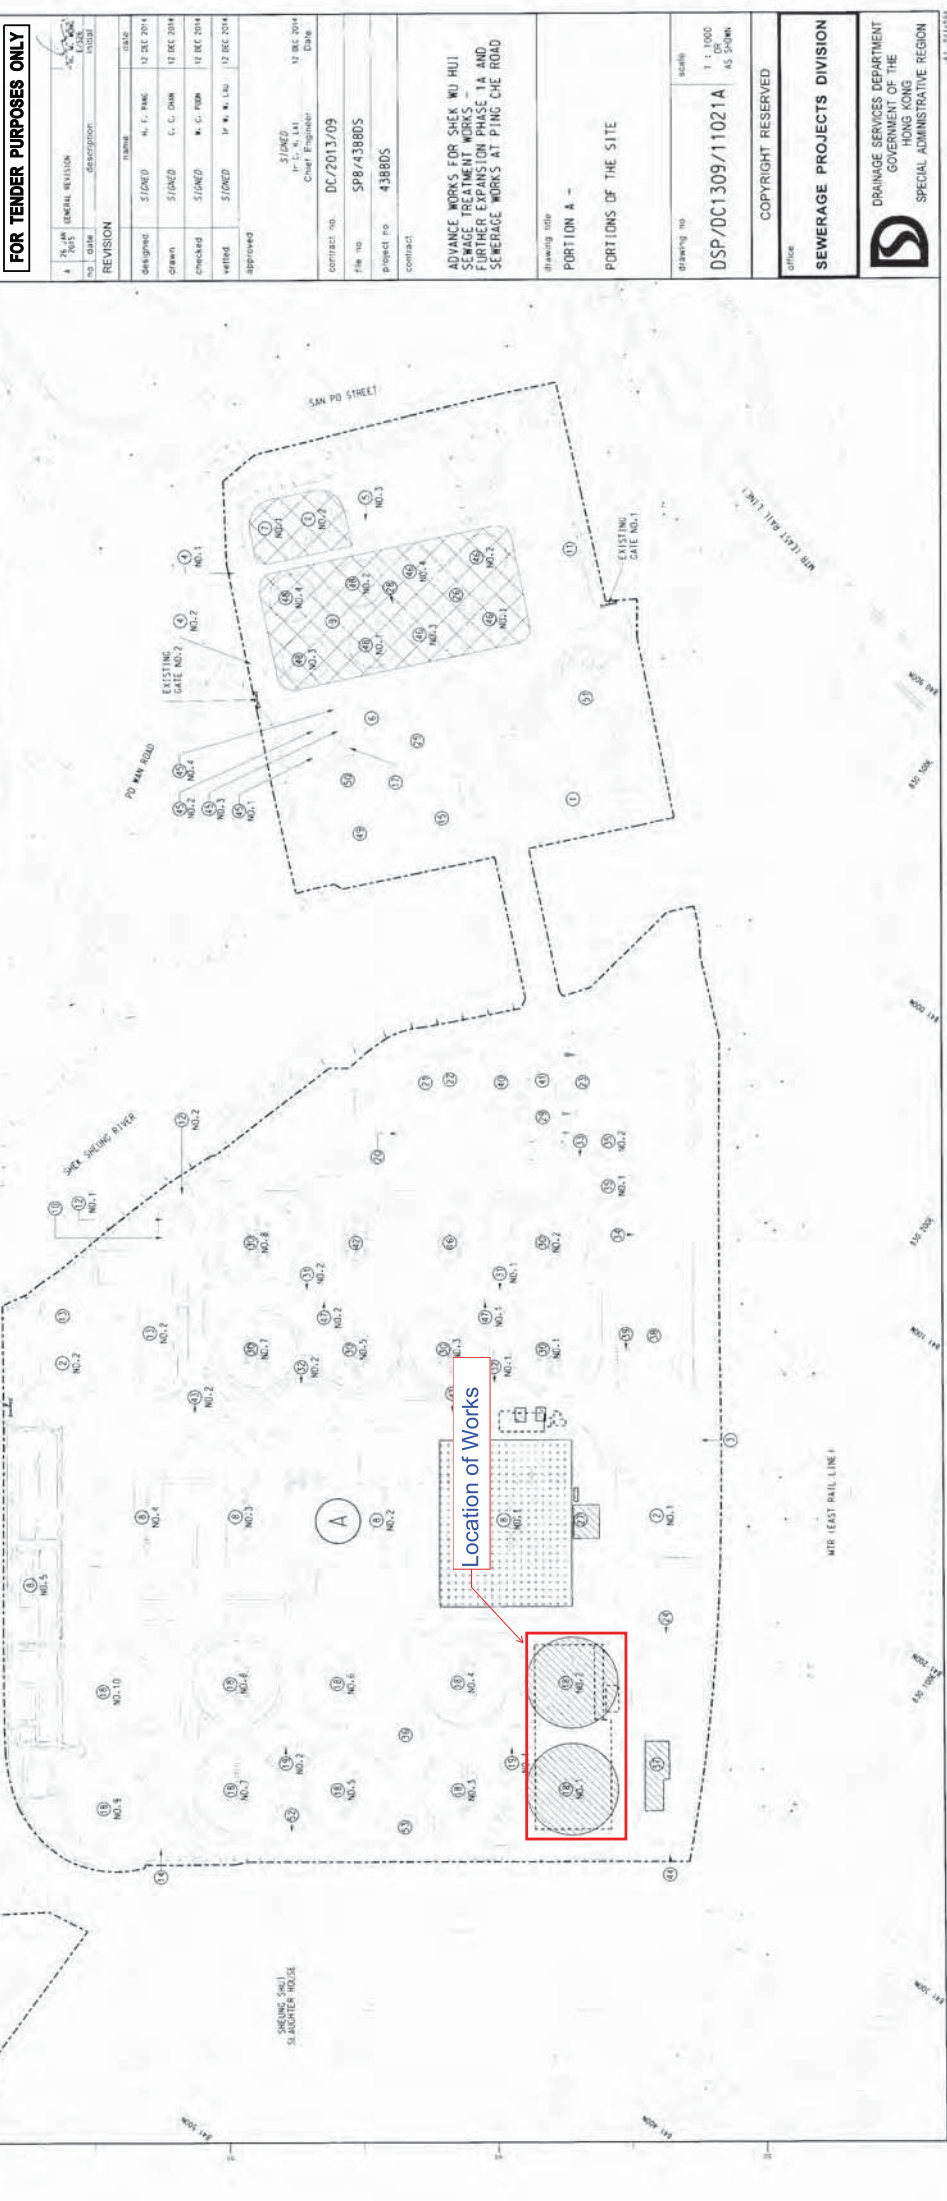

NOTES:

1. ALL GRIDS REFER TO HONG KONG 1980 GRID.
2. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE RELEVANT AUTHORITIES.
3. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE RELEVANT AUTHORITIES.
4. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE RELEVANT AUTHORITIES.
5. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE RELEVANT AUTHORITIES.

| GENERAL REVISION | | REVISION | DATE |
|------------------|----------|----------|-------------|
| 1 | DESIGNED | DESIGNED | 12 DEC 2014 |
| 2 | DRAWN | DRAWN | 12 DEC 2014 |
| 3 | CHECKED | CHECKED | 12 DEC 2014 |
| 4 | VERIFIED | VERIFIED | 12 DEC 2014 |
| 5 | APPROVED | APPROVED | 12 DEC 2014 |

| | |
|----------------|-------------|
| STATION | 12 DEC 2014 |
| Chief Engineer | |
| Contract no. | DC/2013/09 |
| File no. | SPB/438805 |
| Project no. | 438805 |
| Contact | |

ADVANCE WORKS FOR SHER WU HUI SEWAGE TREATMENT WORKS - FURTHER EXPANSION PHASE 1A AND SEWERAGE WORKS AT PING CHE ROAD

PORTION A - PORTIONS OF THE SITE

DSP/DC1309/11021A

COPYRIGHT RESERVED

SEWERAGE PROJECTS DIVISION

DRAINAGE SERVICES DEPARTMENT
GOVERNMENT OF THE HONG KONG
SPECIAL ADMINISTRATIVE REGION

Appendix C

ORGANIZATION STRUCTURE AND CONTACT DETAILS OF RELEVANT PARTIES


Contract No. DC/2013/09

Advance Works for Shek Wu Hui Sewage Treatment Works

- Further Expansion Phase 1A and Sewerage Works at Ping Che Road

SITE ENVIRONMENTAL TEAM ORGANIZATION CHART

Updated on 30 September 2016

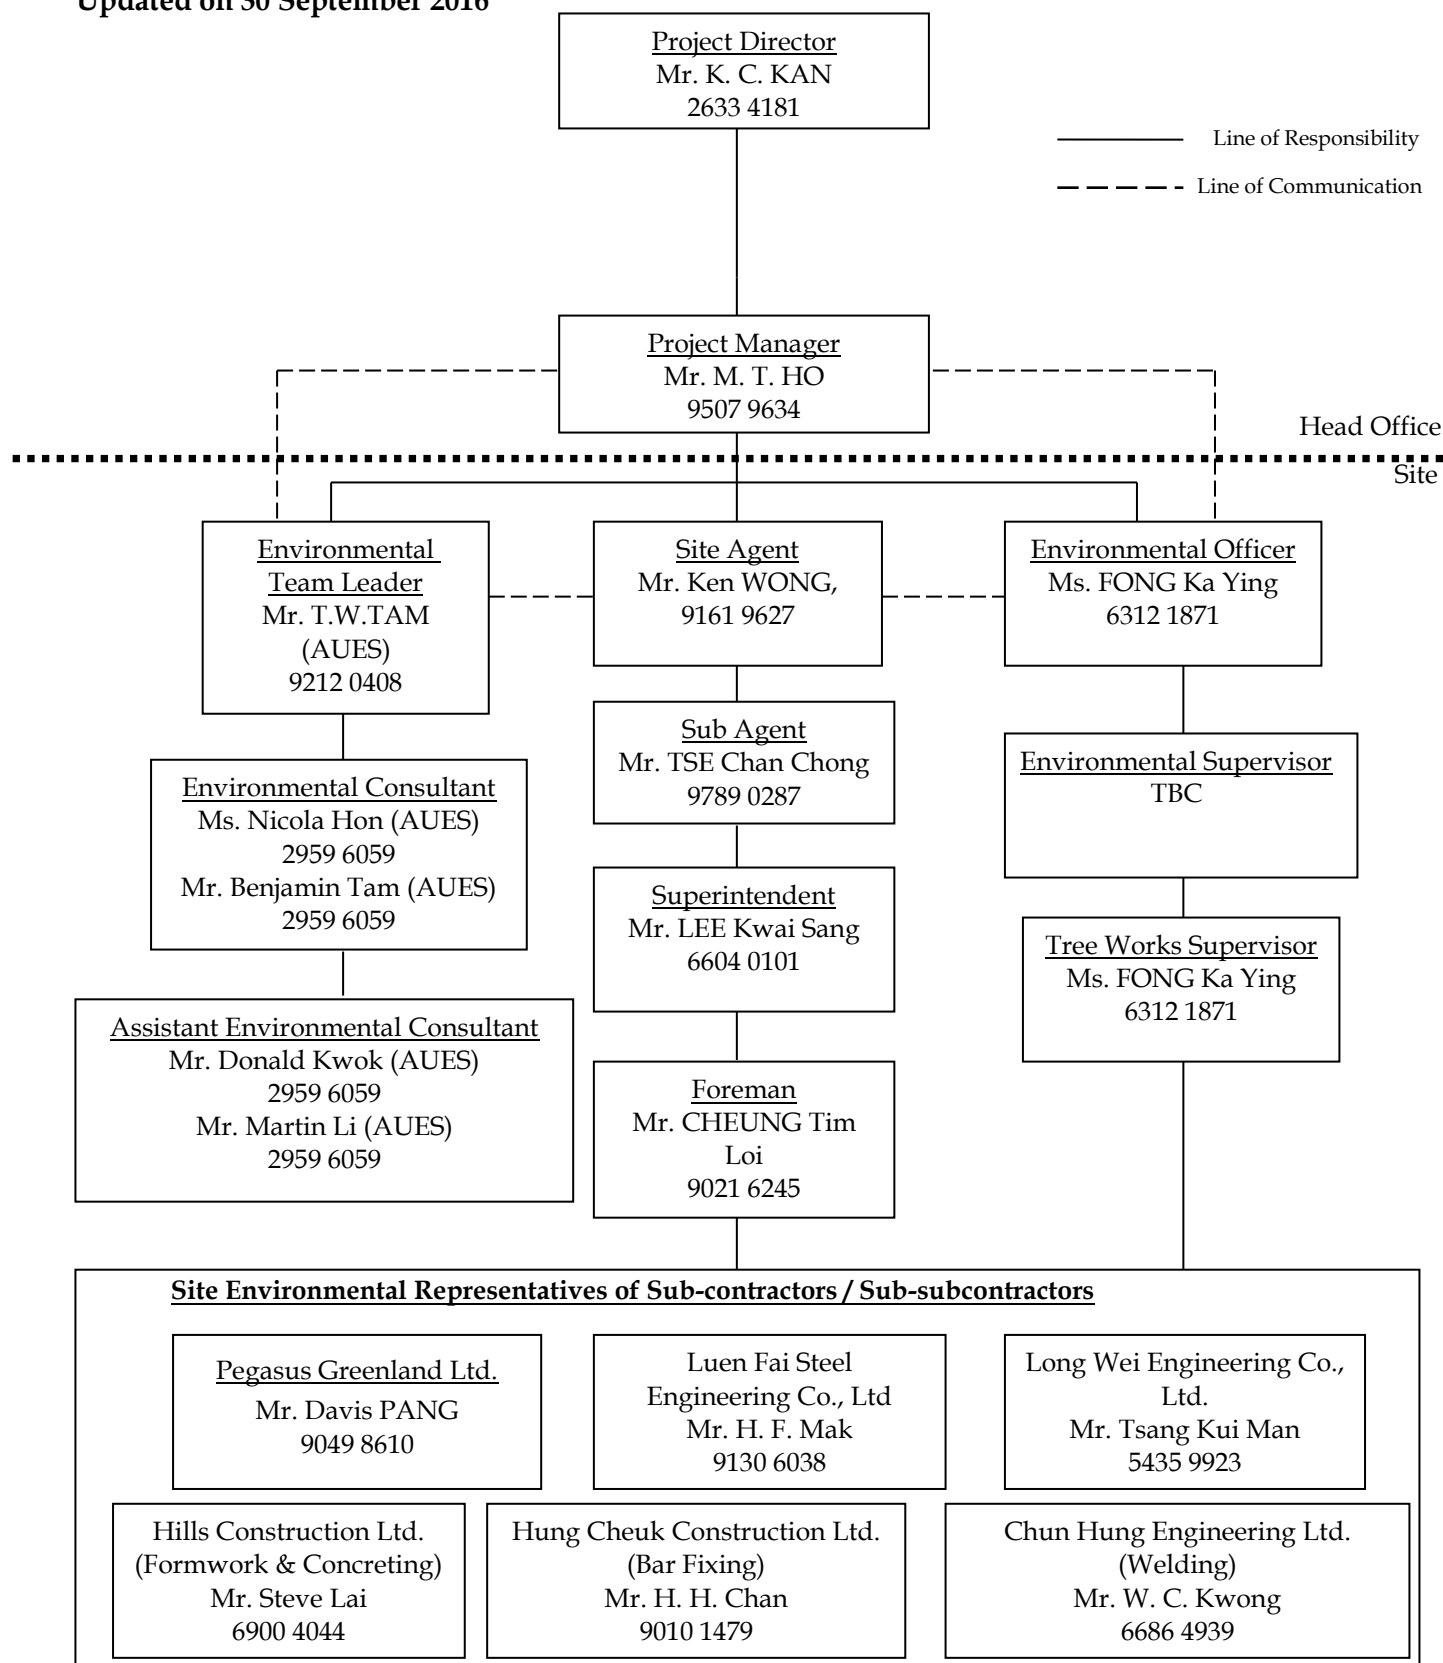

Contact Details of Relevant Parties

| Organization | Project Role | Name of Key Staff | Tel No. | Fax No. |
|---------------------|------------------------------------|--------------------------|----------------|----------------|
| DSD | Resident Site Engineer | Mr. Michael Leung | 2594 7463 | 2827 8700 |
| ANewR | Independent Environmental Checker | Mr. Adi Lee | 2618 2836 | 3007 8648 |
| Tsun Yip | Project Director | Mr. K. C. KAN | 2633 4181 | 2633 4691 |
| Tsun Yip | Project Manager | Mr. M. T. HO | 9507 9634 | 2633 4691 |
| Tsun Yip | Site Agent | Mr. Ken WONG | 9161 9627 | 2633 4691 |
| Tsun Yip | Environmental Officer | Ms. FONG Ka Ying | 6312 1871 | 2633 4691 |
| AUES | Environmental Team Leader | Mr. T. W. Tam | 2959 6059 | 2959 6079 |
| AUES | Environmental Consultant | Ms. Nicola Hon | 2959 6059 | 2959 6079 |
| AUES | Environmental Consultant | Mr. Ben Tam | 2959 6059 | 2959 6079 |
| AUES | Assistant Environmental Consultant | Mr. Martin Li | 2959 6059 | 2959 6079 |

Legend:

DSD (Employer & Resident Site Engineer) – Drainage Service Department

Tsun Yip (Main Contractor) – Tsun Yip Waterworks Construction Co Ltd


ANewR (IEC) – ANewR Consulting Limited

AUES (ET) – Action-United Environmental Services & Consulting

Appendix D

MASTER CONSTRUCTION PROGRAM


Contract DC/2013/09
Advance Works for Shek Wu Hui Sewage Treatment Works -
Further Expansion Phase 1A and Sewage Works at Ping Che Road
Works Programme (Sep 2015)

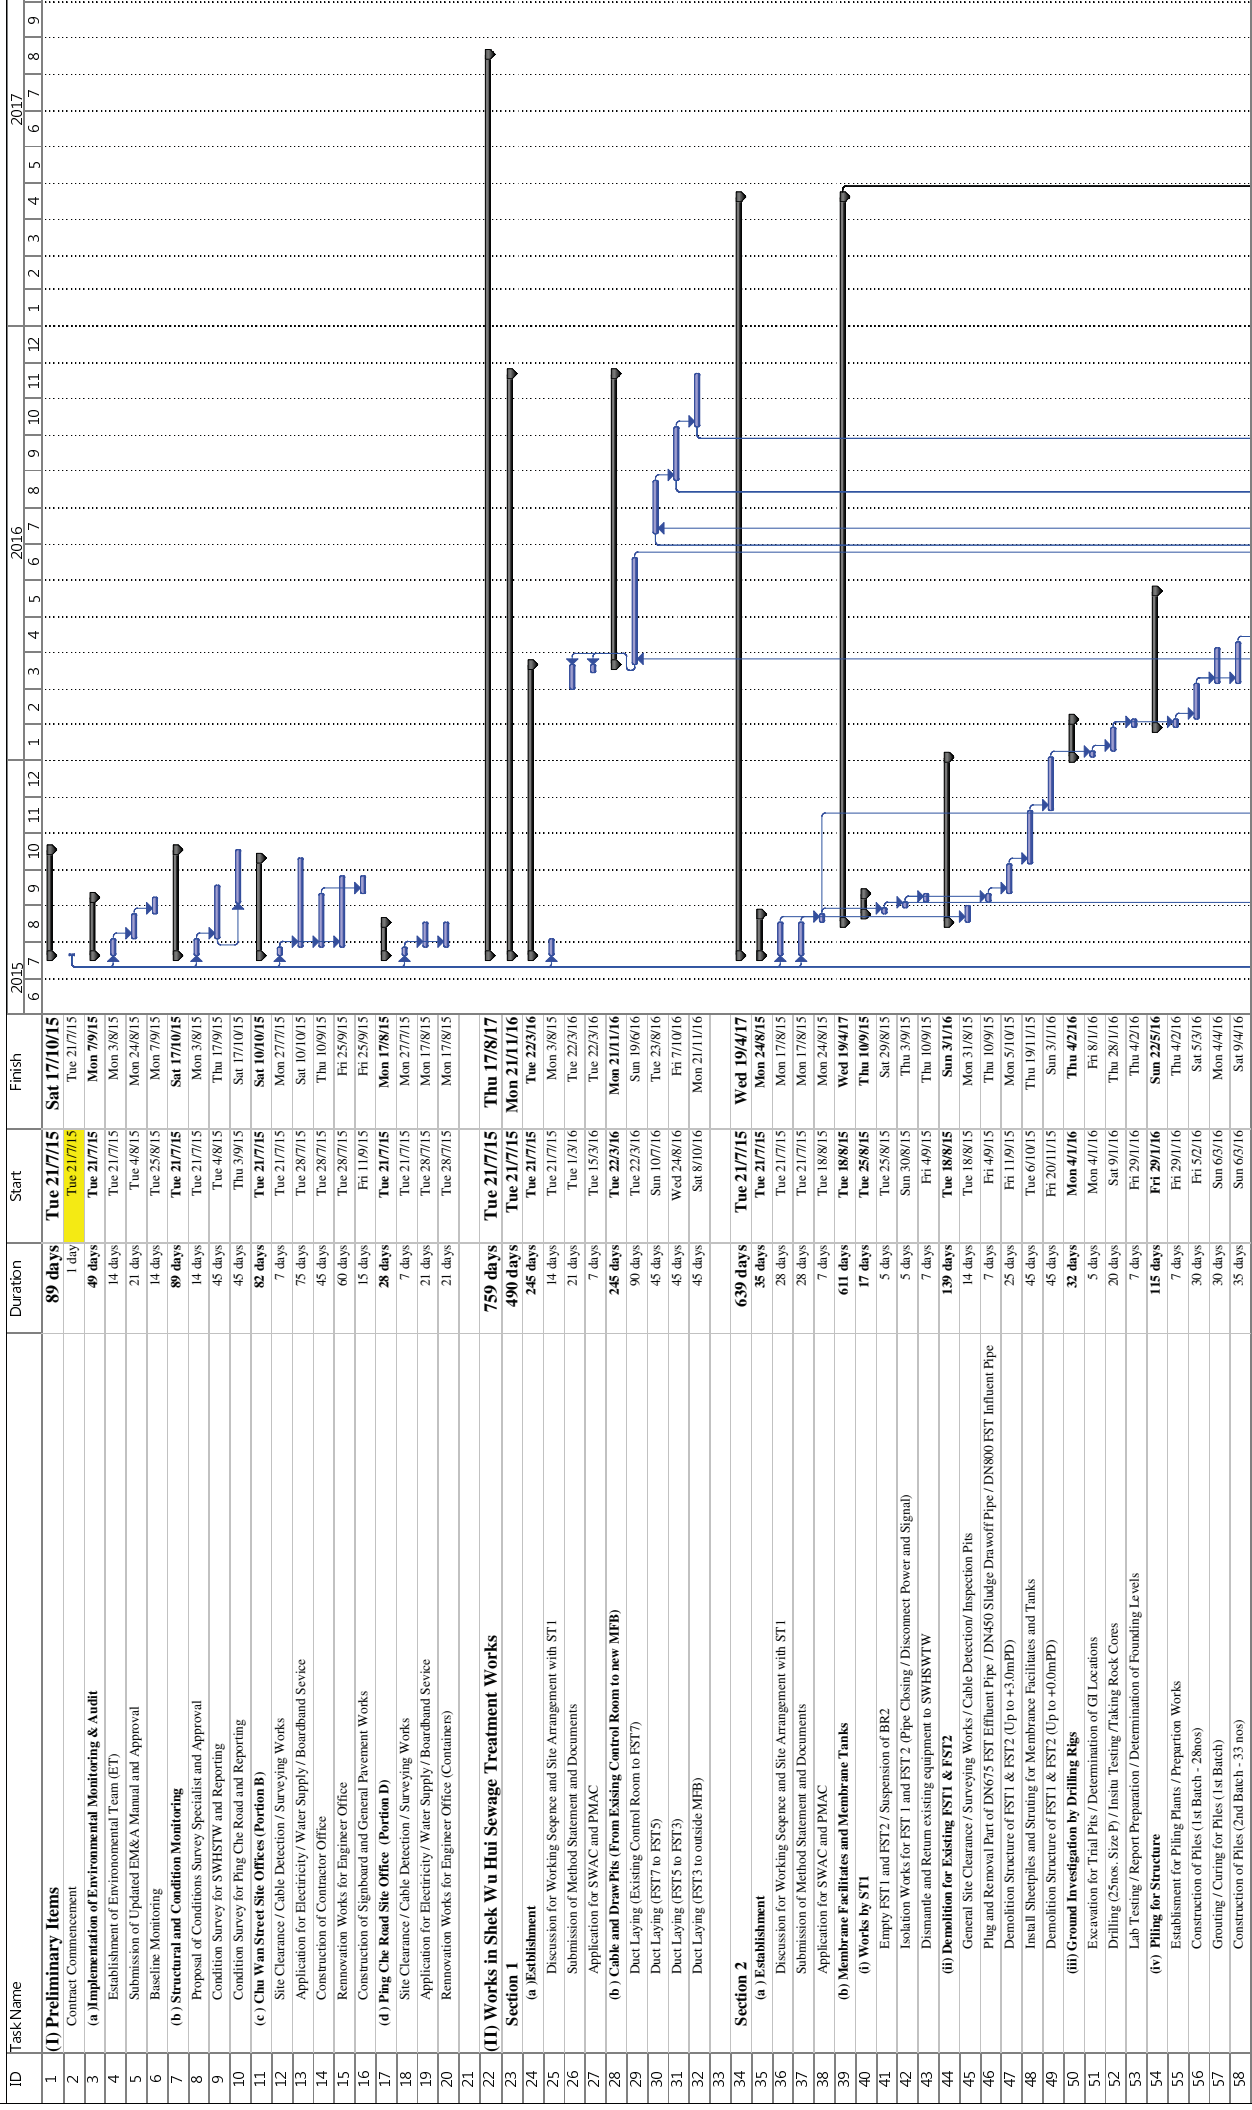

Contract DC/2013/09
Advance Works for Shek Wu Hui Sewage Treatment Works -
Further Expansion Phase 1A and Sewage Works at Ping Che Road
Works Programme (Sep 2015)

| ID | Task Name | Duration | Start | Finish | 2015 | 2016 | 2017 |
|-----|---------------------------------------------------------------------------------------|-----------------|--------------------|---------------------|------|------|------|
| 59 | Grouting / Curing for Piles (2nd Batch) | 30 days | Sun 10/4/16 | Mon 9/5/16 | | | |
| 60 | Pile Setting and Proof drilling | 25 days | Thu 28/4/16 | Sun 22/5/16 | | | |
| 61 | Setting-up of Pile-Load Test System (1st & 2nd pile) | 7 days | Thu 28/4/16 | Thu 5/5/16 | | | |
| 62 | Pile-Load Test for Main Piles (1st and 2nd pile) | 3 days | Fri 6/5/16 | Mon 9/5/16 | | | |
| 63 | Removal and Resetting of Pile-Load Test System | 5 days | Tue 10/5/16 | Sat 14/5/16 | | | |
| 64 | Pile-Load Test for Main Pile (3rd and 4 pile) | 3 days | Sun 15/5/16 | Tue 17/5/16 | | | |
| 65 | Removal of Pile-Load Test System | 5 days | Wed 18/5/16 | Sun 22/5/16 | | | |
| 66 | Proof Drilling | 5 days | Sun 15/5/16 | Thu 19/5/16 | | | |
| 67 | (v) Construction of Substructure | 155 days | Mon 23/5/16 | Mon 24/10/16 | | | |
| 68 | Portion A - Grid C-E / Grid F-G / Grid G-H - G-28 | 110 days | Mon 23/5/16 | Fri 9/9/16 | | | |
| 69 | Excavation to Formation Level (+0.3/+2.4mPD) | 15 days | Mon 23/5/16 | Mon 6/6/16 | | | |
| 70 | Laying Blinding Layer | 2 days | Tue 7/6/16 | Wed 8/6/16 | | | |
| 71 | Preparation for Pilehead | 5 days | Thu 9/6/16 | Mon 13/6/16 | | | |
| 72 | Steelfixing for Membrane Facilities (up to +1.9mPD) and Membrane Tank (up to +3.9mPD) | 10 days | Tue 14/6/16 | Thu 23/6/16 | | | |
| 73 | Installation of formwork / waterstop / other accessory | 7 days | Fri 24/6/16 | Thu 30/6/16 | | | |
| 74 | Concreting | 3 days | Fri 17/7/16 | Sun 3/7/16 | | | |
| 75 | Curing of concrete / formwork removal / making good works | 3 days | Mon 4/7/16 | Wed 6/7/16 | | | |
| 76 | Steelfixing for Membrane Facilities & Tanks (up to +5.4/+7.5mPD) | 15 days | Thu 7/7/16 | Thu 21/7/16 | | | |
| 77 | Installation of formwork / waterstop / other accessory | 10 days | Fri 22/7/16 | Sun 31/7/16 | | | |
| 78 | Concreting | 3 days | Mon 18/7/16 | Wed 3/8/16 | | | |
| 79 | Curing of concrete / formwork removal / making good works | 5 days | Thu 4/8/16 | Mon 8/8/16 | | | |
| 80 | Steelfixing for Membrane Facilities & Tanks (up to +6.77/5mPD) | 15 days | Tue 9/8/16 | Tue 23/8/16 | | | |
| 81 | Installation of formwork / waterstop / other accessory | 10 days | Wed 24/8/16 | Fri 2/9/16 | | | |
| 82 | Concreting | 2 days | Sat 3/9/16 | Sun 4/9/16 | | | |
| 83 | Curing of concrete / formwork removal / making good works | 5 days | Mon 5/9/16 | Fri 9/9/16 | | | |
| 84 | Portion B - Grid A-C / Grid E-F / Grid G-H - G-14 | 115 days | Tue 7/6/16 | Thu 29/9/16 | | | |
| 85 | Excavation to Formation Level (+0.3/+2.4mPD) | 20 days | Tue 7/6/16 | Sun 26/6/16 | | | |
| 86 | Laying Blinding Layer | 2 days | Mon 27/6/16 | Tue 28/6/16 | | | |
| 87 | Preparation for Pilehead | 5 days | Wed 29/6/16 | Sun 3/7/16 | | | |
| 88 | Steelfixing for Membrane Facilities (up to +1.9mPD) and Membrane Tank (up to +3.9mPD) | 10 days | Mon 4/7/16 | Wed 13/7/16 | | | |
| 89 | Installation of formwork / waterstop / other accessory | 7 days | Thu 14/7/16 | Wed 20/7/16 | | | |
| 90 | Concreting | 3 days | Thu 21/7/16 | Sat 23/7/16 | | | |
| 91 | Curing of concrete / formwork removal / making good works | 3 days | Sun 24/7/16 | Tue 26/7/16 | | | |
| 92 | Steelfixing for Membrane Facilities & Tanks (up to +5.4/+7.5mPD) | 15 days | Wed 27/7/16 | Wed 10/8/16 | | | |
| 93 | Installation of formwork / waterstop / other accessory | 10 days | Thu 11/8/16 | Sat 20/8/16 | | | |
| 94 | Concreting | 3 days | Sun 21/8/16 | Tue 23/8/16 | | | |
| 95 | Curing of concrete / formwork removal / making good works | 5 days | Wed 24/8/16 | Sun 28/8/16 | | | |
| 96 | Steelfixing for Membrane Facilities & Tanks (up to +6.77/5mPD) | 15 days | Mon 29/8/16 | Mon 12/9/16 | | | |
| 97 | Installation of formwork / waterstop / other accessory | 10 days | Tue 13/9/16 | Thu 22/9/16 | | | |
| 98 | Concreting | 2 days | Fri 23/9/16 | Sat 24/9/16 | | | |
| 99 | Curing of concrete / formwork removal / making good works | 5 days | Sun 25/9/16 | Thu 29/9/16 | | | |
| 100 | Backfilling and Extracting Sheephile | 25 days | Fri 30/9/16 | Mon 24/10/16 | | | |
| 101 | (v) Construction of Superstructure | 187 days | Fri 30/9/16 | Tue 4/4/17 | | | |
| 102 | Erect Working Platform and Falsework (up to +11.65mPD) | 15 days | Fri 30/9/16 | Fri 14/10/16 | | | |
| 103 | Steelfixing for Membrane Facilities Bldgs | 15 days | Sat 15/10/16 | Sat 29/10/16 | | | |
| 104 | Installation of formwork / other accessory | 15 days | Sun 30/10/16 | Sun 13/11/16 | | | |
| 105 | Concreting | 2 days | Mon 14/11/16 | Tue 15/11/16 | | | |
| 106 | Curing of concrete / formwork removal / making good works | 7 days | Wed 16/11/16 | Tue 22/11/16 | | | |
| 107 | Steelfixing for Membrane Facilities Bldgs (up tp +12.95mPD) | 10 days | Wed 23/11/16 | Fri 2/12/16 | | | |
| 108 | Installation of formwork / other accessory | 7 days | Sat 3/12/16 | Fri 9/12/16 | | | |
| 109 | Concreting | 2 days | Sat 10/12/16 | Sun 11/12/16 | | | |
| 110 | Curing of concrete / formwork removal / making good works | 5 days | Mon 12/12/16 | Fri 16/12/16 | | | |
| 111 | Steelfixing for Membrane Facilities Bldgs (up tp +14.45mPD) | 10 days | Mon 12/12/16 | Mon 26/12/16 | | | |
| 112 | Installation of formwork / other accessory | 7 days | Tue 27/12/16 | Mon 2/1/17 | | | |
| 113 | Concreting | 2 days | Tue 3/1/17 | Wed 4/1/17 | | | |
| 114 | Curing of concrete / formwork removal / making good works | 5 days | Thu 5/1/17 | Mon 9/1/17 | | | |
| 115 | Erect Working Platform and Falsework (up to +19.2mPD) | 15 days | Thu 5/1/17 | Thu 19/1/17 | | | |
| 116 | Steelfixing for Membrane Facilities Bldgs (up tp +19.2mPD) | 15 days | Fri 20/1/17 | Fri 3/2/17 | | | |

Contract DC/2013/09
Advance Works for Shek Wu Hui Sewage Treatment Works -
Further Expansion Phase 1A and Sewage Works at Ping Che Road
Works Programme (Sep 2015)

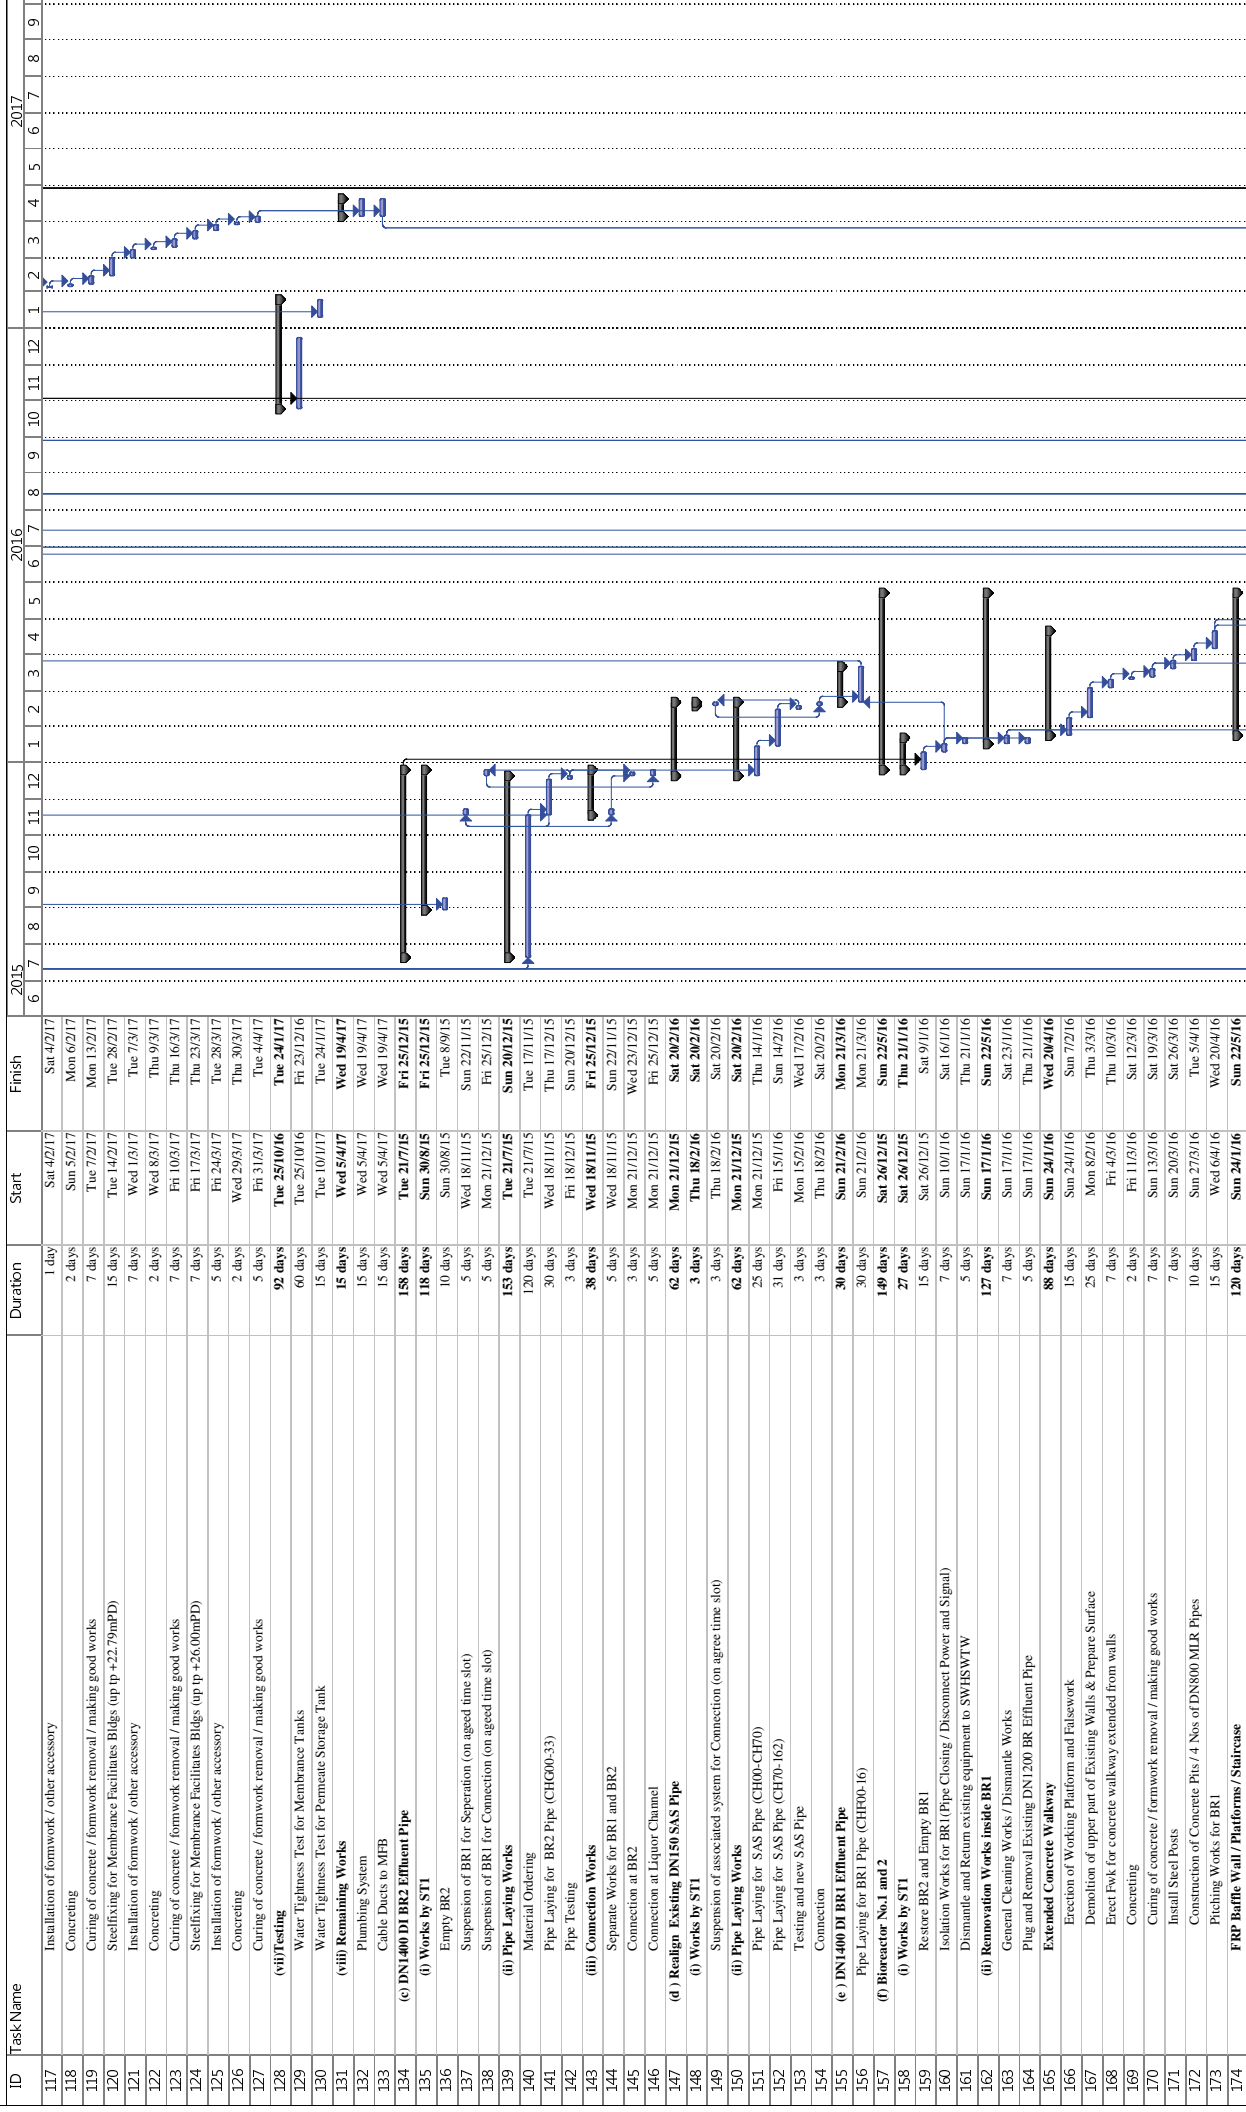

Contract DC/2013/09
Advance Works for Shek Wu Hui Sewage Treatment Works -
Further Expansion Phase 1A and Sewage Works at Ping Che Road
Works Programme (Sep 2015)

| ID | Task Name | Duration | Start | Finish | 2015 | 2016 | 2017 |
|-----|---------------------------------------------------------------------------------------|----------|--------------|--------------|------|------|------|
| 175 | Design, Supply & Installation | 120 days | Sun 24/7/16 | Sun 22/5/16 | | | |
| 176 | (iii) BR1 MS Air Mains within BR1 | 25 days | Sun 20/3/16 | Wed 13/4/16 | | | |
| 177 | Pipe Laying for BR1 Pipe (CHD96-158 & CHD00-62) | 15 days | Sun 20/3/16 | Sun 3/4/16 | | | |
| 178 | Pipe Laying for BR1 Pipe (CHD61-96) | 10 days | Mon 4/4/16 | Wed 13/4/16 | | | |
| 179 | (g) Pretreatment Screen Chamber & Flow Meter Chamber | 168 days | Mon 18/4/16 | Sun 27/10/16 | | | |
| 180 | (i) Works by ST1 | 168 days | Mon 18/4/16 | Sun 27/10/16 | | | |
| 181 | Isolation Works for associated Pipeworks (Pipe Closing / Disconnect Power and Signal) | 3 days | Mon 18/4/16 | Wed 20/4/16 | | | |
| 182 | Suspension of Sludge Draw Off Chamber No.1 and Distribution Chamber No.1 | 2 days | Sat 17/10/16 | Sun 27/10/16 | | | |
| 183 | (iii) Construction of Pretreatment Screen Chamber & Flow Meter Chamber | 66 days | Thu 21/4/16 | Sat 25/6/16 | | | |
| 184 | Excavation and ELS Installation | 10 days | Thu 21/4/16 | Sat 30/4/16 | | | |
| 185 | Demolish existing pipeworks and Treatment for connection | 2 days | Sun 15/5/16 | Mon 2/5/16 | | | |
| 186 | Lay Rockfills and Blinding | 3 days | Tue 3/5/16 | Thu 5/5/16 | | | |
| 187 | Steel Fixing for Chambers (up to +4.5mPD) | 3 days | Fri 6/5/16 | Sun 8/5/16 | | | |
| 188 | Installation of formwork / waterstop / other accessory | 3 days | Mon 9/5/16 | Wed 11/5/16 | | | |
| 189 | Concreting | 2 days | Thu 12/5/16 | Fri 13/5/16 | | | |
| 190 | Curing of concrete / formwork removal / making good works | 2 days | Sat 14/5/16 | Sun 15/5/16 | | | |
| 191 | Steel Fixing for Chambers (up to +8.55 / +7.3mPD) | 5 days | Mon 16/5/16 | Fri 20/5/16 | | | |
| 192 | Installation of formwork / waterstop / other accessory | 5 days | Sat 21/5/16 | Wed 25/5/16 | | | |
| 193 | Concreting | 2 days | Thu 26/5/16 | Fri 27/5/16 | | | |
| 194 | Curing of concrete / formwork removal / making good works | 7 days | Sat 28/5/16 | Fri 3/6/16 | | | |
| 195 | Remove Sheetpiles and Backfilling | 7 days | Sat 4/6/16 | Fri 10/6/16 | | | |
| 196 | Construction of Associated valve Pits | 15 days | Sat 11/6/16 | Sat 25/6/16 | | | |
| 197 | (iii) DN100 Screen Wash Water Pipe / DN 80 Screen Slip Wash Water Pipe | 50 days | Sun 14/8/16 | Sun 21/10/16 | | | |
| 198 | Pipe Laying for Pipe (CHD00-55 & CHD00-68) | 45 days | Sun 14/8/16 | Tue 27/9/16 | | | |
| 199 | Testing | 3 days | Wed 28/9/16 | Fri 30/9/16 | | | |
| 200 | Connection | 2 days | Sat 11/10/16 | Sun 21/10/16 | | | |
| 201 | (h) DN1400 DI RAS Pipe | 216 days | Sun 26/6/16 | Fri 27/11/17 | | | |
| 202 | Construction of Concrete Pipe Trough (beside BR1) | 44 days | Sun 26/6/16 | Mon 8/8/16 | | | |
| 203 | Excavation and Sheetpiling | 15 days | Sun 26/6/16 | Sun 10/7/16 | | | |
| 204 | Lay Rockfill and Blinding | 2 days | Mon 11/7/16 | Tue 12/7/16 | | | |
| 205 | Steel Fixing for Base | 3 days | Wed 13/7/16 | Fri 15/7/16 | | | |
| 206 | Installation of formwork / waterstop / other accessory | 3 days | Sat 16/7/16 | Mon 18/7/16 | | | |
| 207 | Concreting | 2 days | Tue 19/7/16 | Wed 20/7/16 | | | |
| 208 | Curing of concrete / formwork removal / making good works | 2 days | Thu 21/7/16 | Fri 22/7/16 | | | |
| 209 | Steel Fixing for Wall | 3 days | Sat 23/7/16 | Mon 25/7/16 | | | |
| 210 | Installation of formwork / waterstop / other accessory | 3 days | Tue 26/7/16 | Thu 28/7/16 | | | |
| 211 | Concreting | 2 days | Fri 29/7/16 | Sat 30/7/16 | | | |
| 212 | Curing of concrete / formwork removal / making good works | 2 days | Sun 31/7/16 | Mon 1/8/16 | | | |
| 213 | Remove Sheetpiles and Backfilling | 7 days | Tue 2/8/16 | Mon 8/8/16 | | | |
| 214 | Pipe Laying for RAS Pipe (CHC08-153) | 5 days | Tue 9/8/16 | Sat 13/8/16 | | | |
| 215 | Pipe Laying for RAS Pipe (CHC75-98) | 20 days | Tue 25/10/16 | Sun 13/1/16 | | | |
| 216 | Pipe Laying for RAS Pipe (CHC35-75) | 30 days | Mon 14/11/16 | Tue 13/12/16 | | | |
| 217 | Pipe Laying for RAS Pipe (CHC00-35) | 45 days | Wed 14/12/16 | Fri 27/1/17 | | | |
| 218 | (i) BR1 MS Air Mains Outside BR1 | 50 days | Tue 25/10/16 | Tue 13/12/16 | | | |
| 219 | Pipe Laying for BR1 Pipe (CHD4-61) | 20 days | Tue 25/10/16 | Sun 13/1/16 | | | |
| 220 | Pipe Laying for BR1 Pipe (CHD00-44) | 30 days | Mon 14/11/16 | Tue 13/12/16 | | | |
| 221 | (j) CLP Cable and Drawpits | 304 days | Mon 20/6/16 | Wed 19/4/17 | | | |
| 222 | CLP Cable Ducts with Trench (Outside to FST7) | 20 days | Mon 20/6/16 | Sat 9/7/16 | | | |
| 223 | CLP Cable Ducts with Trench (FST7 to FST3) | 45 days | Sun 10/7/16 | Tue 23/8/16 | | | |
| 224 | CLP Cable Ducts with Trench (FST5 to FST3) | 45 days | Wed 24/8/16 | Fri 7/10/16 | | | |
| 225 | CLP Cable Ducts with Trench (FST3 to Outside MFB) | 45 days | Sat 8/10/16 | Mon 21/1/16 | | | |
| 226 | CLP Cable Ducts with Trench (to MFB) | 15 days | Wed 5/4/17 | Wed 19/4/17 | | | |
| 227 | (k) Fresh Watermains and Fire Service Watermains | 304 days | Mon 20/6/16 | Wed 19/4/17 | | | |
| 228 | PipeLaying (Outside to FST7) | 20 days | Mon 20/6/16 | Sat 9/7/16 | | | |
| 229 | PipeLaying (FST7 to FST5) | 45 days | Sun 10/7/16 | Tue 23/8/16 | | | |
| 230 | PipeLaying (FST5 to FST3) | 45 days | Wed 24/8/16 | Fri 7/10/16 | | | |
| 231 | PipeLaying (FST3 to Outside MFB) | 45 days | Sat 8/10/16 | Mon 21/1/16 | | | |
| 232 | PipeLaying (toMFB) | 15 days | Wed 5/4/17 | Wed 19/4/17 | | | |

Task

Milestone


Summary

Date: 15 Sep 2015

Page 4

Revision 02

Contract DC/2013/09
Advance Works for Shek Wu Hui Sewage Treatment Works -
Further Expansion Phase 1A and Sewage Works at Ping Che Road
Works Programme (Sep 2015)

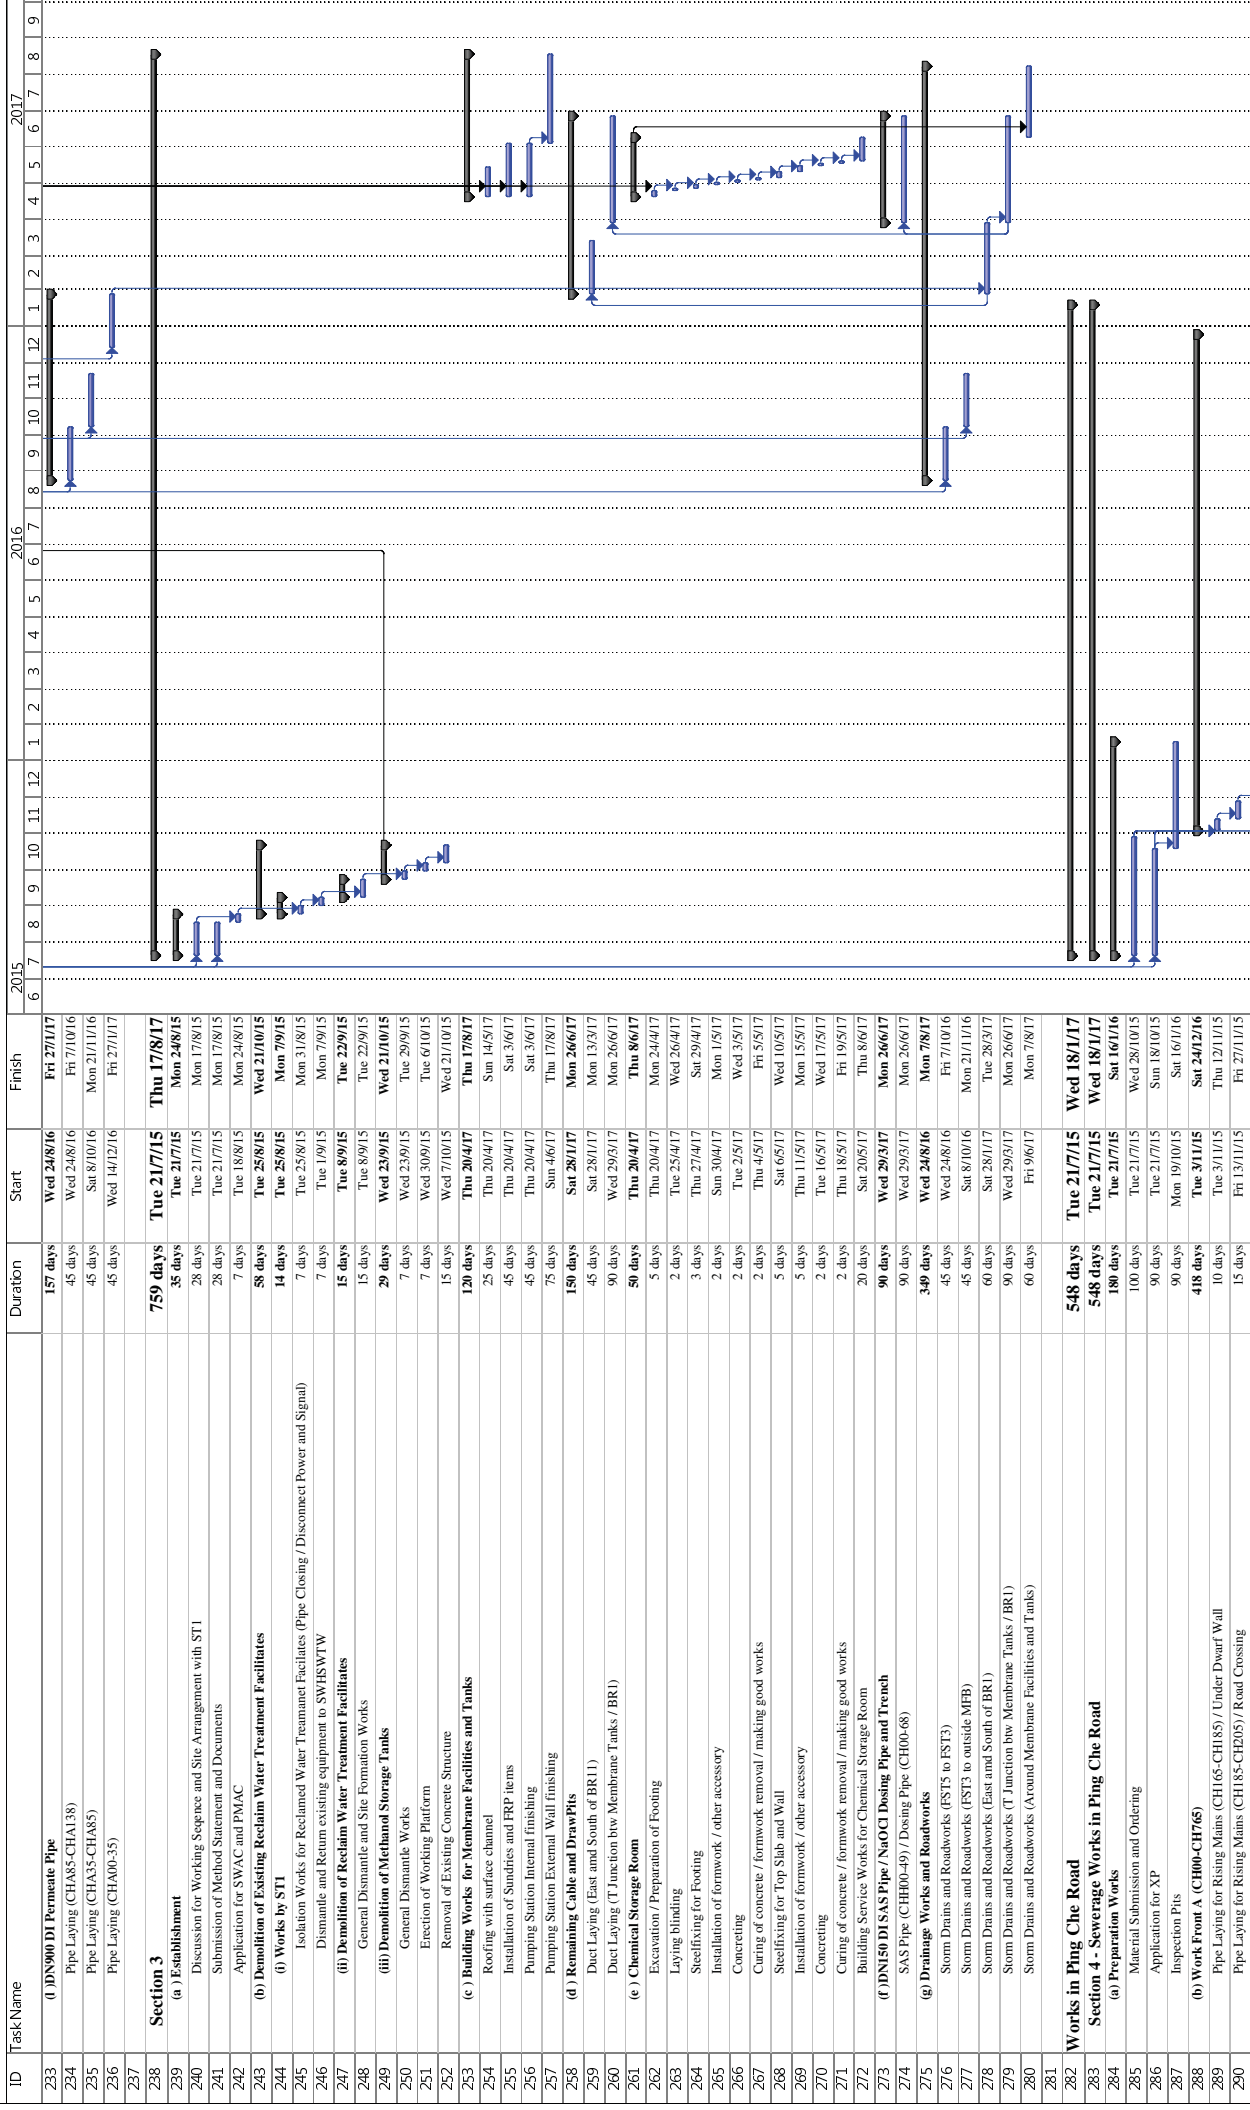


Contract DC/2013/09
Advance Works for Shek Wu Hui Sewage Treatment Works -
Further Expansion Phase 1A and Sewage Works at Ping Che Road
Works Programme (Sep 2015)

| ID | Task Name | Duration | Start | Finish | 2015 | 2016 | 2017 |
|-----|-----------------------------------------------------------------|----------|--------------|--------------|------|------|------|
| 291 | Pipe Laying for Rising Mains (CH205-CH245) / Under Dwarf Wall | 20 days | Sat 28/11/15 | Thu 17/12/15 | 6 | | |
| 292 | Pipe Laying for Rising Mains (CH245-CH295) / Footpath | 18 days | Fri 18/12/15 | Mon 4/1/16 | 7 | | |
| 293 | Pipe Laying for Rising Mains (CH295-CH300) / Road Crossing | 10 days | Tue 5/1/16 | Thu 4/1/16 | 8 | | |
| 294 | Pipe Laying for Rising Mains (CH300-CH360) / Footpath | 20 days | Fri 15/1/16 | Wed 3/2/16 | 9 | | |
| 295 | Pipe Laying for Rising Mains (CH360-CH425) / Under Dwarf Wall | 35 days | Thu 4/2/16 | Wed 9/3/16 | 10 | | |
| 296 | Pipe Laying for Rising Mains (CH425-CH445) / Road Crossing | 15 days | Thu 10/3/16 | Thu 24/3/16 | 11 | | |
| 297 | Pipe Laying for Rising Mains (CH445-CH560) / Under Dwarf Wall | 58 days | Fri 25/3/16 | Sat 21/5/16 | 12 | | |
| 298 | Interim Pressure Test | 7 days | Sun 22/5/16 | Sat 28/5/16 | 1 | | |
| 299 | Pipe Laying for Rising Mains (CH560-CH590) / Footpath | 15 days | Sun 29/5/16 | Sun 12/6/16 | 2 | | |
| 300 | Pipe Laying for Rising Mains (CH590-CH660) / Under Dwarf Wall | 35 days | Mon 13/6/16 | Sun 17/7/16 | 3 | | |
| 301 | Pipe Laying for Rising Mains (CH660-CH670) / Road Crossing | 15 days | Mon 18/7/16 | Mon 18/8/16 | 4 | | |
| 302 | Pipe Laying for Rising Mains (CH670-CH750) / Under Dwarf Wall | 40 days | Tue 2/8/16 | Sat 1/10/16 | 5 | | |
| 303 | Pipe Laying for Rising Mains (CH750-CH765) / Road Crossing | 15 days | Sun 11/9/16 | Sun 25/9/16 | 6 | | |
| 304 | Pipe Laying for Rising Mains (CH155-CH165) / Road Crossing | 15 days | Mon 26/9/16 | Mon 10/10/16 | 7 | | |
| 305 | Pipe Laying for Rising Mains (CH160-CH155) / Carpark | 48 days | Tue 11/10/16 | Sun 27/11/16 | 8 | | |
| 306 | Pipe Laying for Rising Mains (CH00-CH160) / Footpath | 20 days | Mon 28/11/16 | Sat 17/12/16 | 9 | | |
| 307 | Interim Pipe Testing | 7 days | Sun 18/12/16 | Sat 24/12/16 | 10 | | |
| 308 | (c) Work Front B (CH765-CH1540) | 443 days | Tue 31/1/15 | Wed 18/1/17 | 11 | | |
| 309 | Pipe Laying for Rising Mains (CH970-CH980) / Under Dwarf Wall | 5 days | Tue 3/11/15 | Sat 7/11/15 | 12 | | |
| 310 | Pipe Laying for Rising Mains (CH980-CH990) / Road Crossing | 15 days | Sun 8/11/15 | Sun 22/11/15 | 1 | | |
| 311 | Pipe Laying for Rising Mains (CH990-CH1000) / Under Dwarf Wall | 5 days | Mon 23/11/15 | Fri 27/11/15 | 2 | | |
| 312 | Pipe Laying for Rising Mains (CH1000-CH1010) / Road Crossing | 15 days | Sat 28/11/15 | Sat 12/12/15 | 3 | | |
| 313 | Pipe Laying for Rising Mains (CH1010-CH1085) / Under Dwarf Wall | 23 days | Sun 13/12/15 | Mon 4/1/16 | 4 | | |
| 314 | Pipe Laying for Rising Mains (CH1085-CH1075) / Road Crossing | 15 days | Tue 5/1/16 | Tue 19/1/16 | 5 | | |
| 315 | Pipe Laying for Rising Mains (CH1075-CH1095) / Under Dwarf Wall | 10 days | Wed 20/1/16 | Fri 29/1/16 | 6 | | |
| 316 | Pipe Laying for Rising Mains (CH1095-CH1180) / Footpath | 28 days | Sat 30/1/16 | Fri 26/2/16 | 7 | | |
| 317 | Pipe Laying for Rising Mains (CH1180-CH1205) / Road Crossing | 20 days | Sat 27/2/16 | Thu 17/3/16 | 8 | | |
| 318 | Pipe Laying for Rising Mains (CH1205-CH1270) / Under Dwarf Wall | 33 days | Fri 18/3/16 | Tue 19/4/16 | 9 | | |
| 319 | Pipe Laying for Rising Mains (CH1270-CH1290) / Road Crossing | 15 days | Wed 20/4/16 | Wed 4/5/16 | 10 | | |
| 320 | Pipe Laying for Rising Mains (CH1290-CH1335) / River Crossing | 20 days | Thu 5/5/16 | Tue 24/5/16 | 11 | | |
| 321 | Pipe Laying for Rising Mains (CH1335-CH1385) / Under Dwarf Wall | 25 days | Wed 25/5/16 | Sat 18/6/16 | 12 | | |
| 322 | Interim Pipe Testing | 7 days | Sun 19/6/16 | Sat 25/6/16 | 1 | | |
| 323 | Pipe Laying for Rising Mains (CH1385-CH1410) / Road Crossing | 15 days | Sun 26/6/16 | Sun 10/7/16 | 2 | | |
| 324 | Pipe Laying for Rising Mains (CH1410-CH1430) / Under Dwarf Wall | 10 days | Mon 11/7/16 | Wed 20/7/16 | 3 | | |
| 325 | Pipe Laying for Rising Mains (CH1430-CH1440) / Footpath | 5 days | Thu 21/7/16 | Mon 25/7/16 | 4 | | |
| 326 | Pipe Laying for Rising Mains (CH1440-CH1495) / Under Dwarf Wall | 25 days | Tue 26/7/16 | Fri 19/8/16 | 5 | | |
| 327 | Pipe Laying for Rising Mains (CH1495-CH1520) / Footpath | 10 days | Sat 20/8/16 | Mon 29/8/16 | 6 | | |
| 328 | Pipe Laying for Rising Mains (CH1520-CH1540) / Under Dwarf Wall | 10 days | Tue 30/8/16 | Thu 8/9/16 | 7 | | |
| 329 | Pipe Laying for Rising Mains (CH950-CH970) / Road Crossing | 15 days | Fri 9/9/16 | Fri 23/9/16 | 8 | | |
| 330 | Pipe Laying for Rising Mains (CH855-CH950) / Under Dwarf Wall | 48 days | Sat 24/9/16 | Thu 10/11/16 | 9 | | |
| 331 | Pipe Laying for Rising Mains (CH845-CH855) / Road Crossing | 15 days | Fri 11/11/16 | Fri 25/11/16 | 10 | | |
| 332 | Pipe Laying for Rising Mains (CH765-CH845) / Under Dwarf Wall | 40 days | Sat 26/11/16 | Wed 4/1/17 | 11 | | |
| 333 | Final Pressure Testing and Swabbing | 14 days | Thu 5/1/17 | Wed 18/1/17 | 12 | | |

Appendix E

PROPOSED MONITORING LOCATIONS

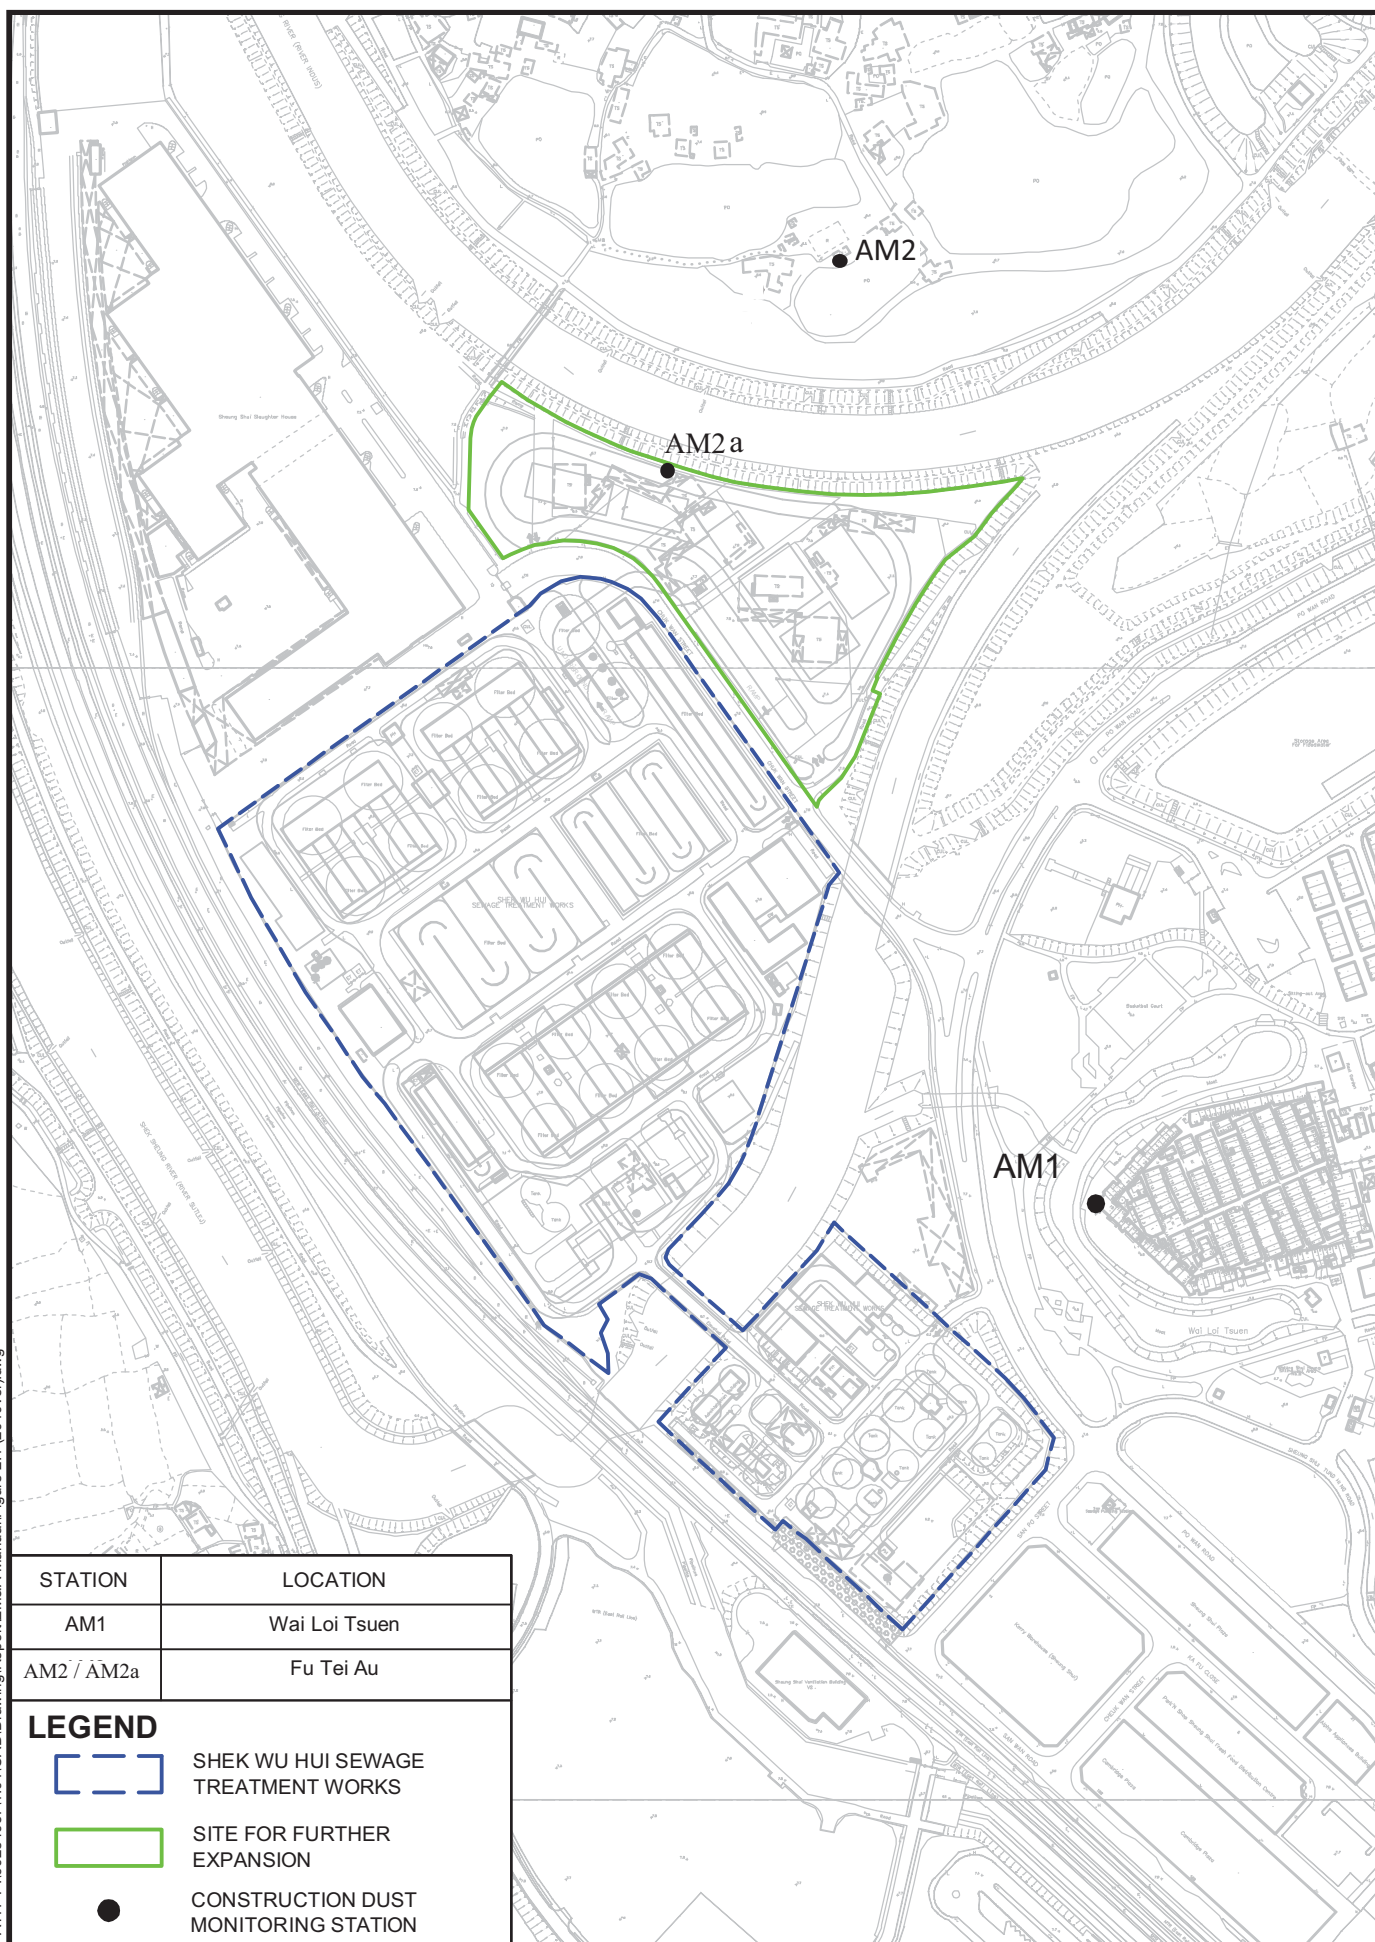


AGREEMENT NO. CE 40/2012 (DS)
 SHEK WU HUI SEWAGE TREATMENT WORKS
 - FURTHER EXPANSION PHASE 1A
 - INVESTIGATION

PROPOSED CONSTRUCTION DUST MONITORING
 STATIONS FOR CONSTRUCTION PHASE AND
 OPERATION PHASE

AECOM

Project No.: 60284037 Date: FEB. 2014

Drawing No.
 60284037/EM&AM/405

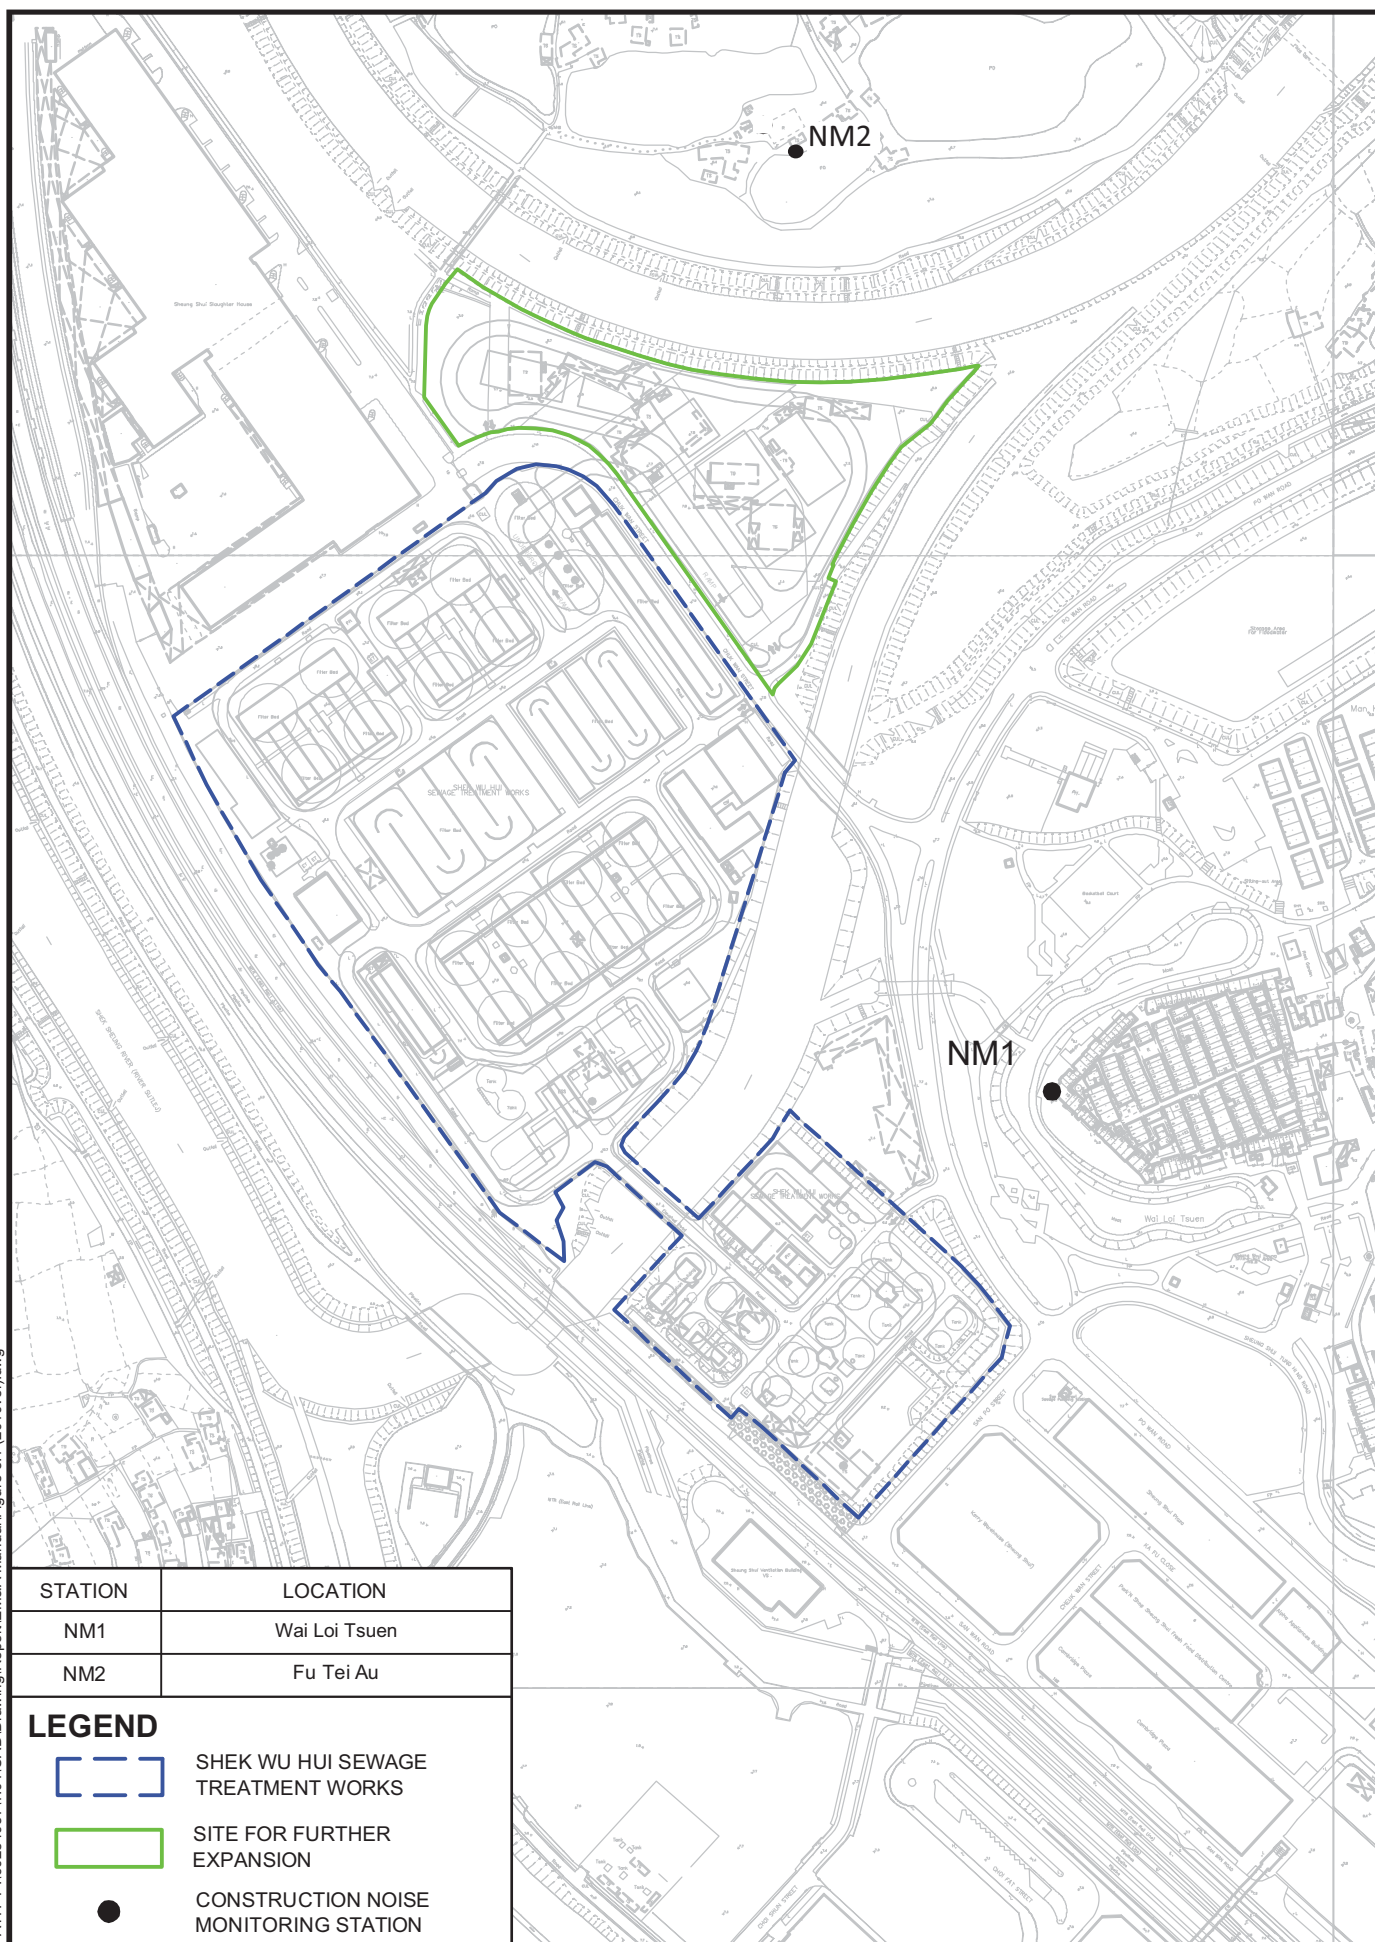

AGREEMENT NO. CE 40/2012 (DS)
 SHEK WU HUI SEWAGE TREATMENT WORKS
 - FURTHER EXPANSION PHASE 1A
 - INVESTIGATION

LOCATIONS OF CONSTRUCTION NOISE MONITORING STATIONS

AECOM

Project No.: 60284037 Date: FEB. 2014

Drawing No.
 60284037/EM&AM/407

Appendix F

EVENT ACTION PLAN

Event and Action Plan for Construction Dust

| Event | Action | | | |
|-----------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | ET | IEC | ER | Contractor |
| Action level being exceeded by one sampling | <ol style="list-style-type: none"> 1. Identify source, investigate the causes of complaint and propose remedial measures; 2. Inform IEC and ER; 3. Repeat measurement to confirm finding; 4. Increase monitoring frequency to daily. | <ol style="list-style-type: none"> 1. Check monitoring data submitted by ET; 2. Check Contractor's working method. | <ol style="list-style-type: none"> 1. Notify Contractor. | <ol style="list-style-type: none"> 1. Rectify any unacceptable practice; 2. Amend working methods if appropriate. |
| Action level being exceeded by two or more consecutive sampling | <ol style="list-style-type: none"> 1. Identify source; 2. Inform IEC and ER; 3. Advise the ER on the effectiveness of the proposed remedial measures; 4. Repeat measurements to confirm findings; 5. Increase monitoring frequency to daily; 6. Discuss with IEC and Contractor on remedial actions required; 7. If exceedance continues, arrange meeting with IEC and ER; 8. If exceedance stops, cease additional monitoring. | <ol style="list-style-type: none"> 1. Check monitoring data submitted by ET; 2. Check Contractor's working method; 3. Discuss with ET and Contractor on possible remedial measures; 4. Advise the ET on the effectiveness of the proposed remedial measures; 5. Supervise Implementation of remedial measures. | <ol style="list-style-type: none"> 1. Confirm receipt of notification of exceedance in writing; 2. Notify Contractor; 3. Ensure remedial measures properly implemented. | <ol style="list-style-type: none"> 1. Submit proposals for remedial actions to IEC within three working days of notification; 2. Implement the agreed proposals; 3. Amend proposal if appropriate. |
| Limit level being exceeded by one sampling | <ol style="list-style-type: none"> 1. Identify source, investigate the causes of exceedance and propose remedial measures; 2. Inform Contractor, IEC, ER, and EPD; 3. Repeat measurement to confirm finding; 4. Increase monitoring frequency to daily; 5. Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results. | <ol style="list-style-type: none"> 1. Check monitoring data submitted by ET; 2. Check Contractor's working method; 3. Discuss with ET and Contractor on possible remedial measures; 4. Advise the ER on the effectiveness of the proposed remedial measures; 5. Supervise implementation of remedial measures. | <ol style="list-style-type: none"> 1. Confirm receipt of notification of exceedance in writing; 2. Notify Contractor; 3. Ensure remedial measures properly implemented. | <ol style="list-style-type: none"> 1. Take immediate action to avoid further exceedance; 2. Submit proposals for remedial actions to IEC within three working days of notification; 3. Implement the agreed proposals; 4. Amend proposal if appropriate. |
| Limit level being exceeded by two or more consecutive sampling | <ol style="list-style-type: none"> 1. Notify IEC, ER, Contractor and EPD; 2. Identify source; 3. Repeat measurement to confirm findings; 4. Increase monitoring frequency to daily; 5. Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented; 6. Arrange meeting with IEC and ER to discuss the remedial actions to be taken; 7. Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results; 8. If exceedance stops, cease additional monitoring. | <ol style="list-style-type: none"> 1. Discuss amongst ER, ET, and Contractor on the potential remedial actions; 2. Review Contractor's remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly; 3. Supervise the implementation of remedial measures. | <ol style="list-style-type: none"> 1. Confirm receipt of notification of exceedance in writing; 2. Notify Contractor; 3. In consolidation with the IEC, agree with the Contractor on the remedial measures to be implemented; 4. Ensure remedial measures properly implemented; 5. If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated. | <ol style="list-style-type: none"> 1. Take immediate action to avoid further exceedance; 2. Submit proposals for remedial actions to IEC within three working days of notification; 3. Implement the agreed proposals; 4. Resubmit proposals if problem still not under control; 5. Stop the relevant portion of works as determined by the ER until the exceedance is abated. |

Event and Action Plan for Construction Noise

| Event | Action | | | |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | ET | IEC | ER | Contractor |
| Action Level | <ol style="list-style-type: none"> 1. Notify IEC and Contractor; 2. Carry out investigation; 3. Report the results of investigation to the IEC, ER and Contractor; 4. Discuss with the Contractor and formulate remedial measures; 5. Increase monitoring frequency to check mitigation effectiveness. | <ol style="list-style-type: none"> 1. Review the analysed results submitted by the ET; 2. Review the proposed remedial measures by the Contractor and advise the ER accordingly; 3. Supervise the implementation of remedial measures. | <ol style="list-style-type: none"> 1. Confirm receipt of notification of failure in writing; 2. Notify Contractor; 3. Require Contractor to propose remedial measures for the analysed noise problem; 4. Ensure remedial measures are properly implemented. | <ol style="list-style-type: none"> 1. Submit noise mitigation proposals to IEC; 2. Implement noise mitigation proposals. |
| Limit Level | <ol style="list-style-type: none"> 1. Identify source; 2. Inform IEC, ER, EPD and Contractor; 3. Repeat measurements to confirm findings; 4. Increase monitoring frequency; 5. Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented; 6. Inform IEC, ER and EPD the causes and actions taken for the exceedances; 7. Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results; 8. If exceedance stops, cease additional monitoring. | <ol style="list-style-type: none"> 1. Discuss amongst ER, ET, and Contractor on the potential remedial actions; 2. Review Contractors remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly; 3. Supervise the implementation of remedial measures. | <ol style="list-style-type: none"> 1. Confirm receipt of notification of failure in writing; 2. Notify Contractor; 3. Require Contractor to propose remedial measures for the analysed noise problem; 4. Ensure remedial measures properly implemented; 5. If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated. | <ol style="list-style-type: none"> 1. Take immediate action to avoid further exceedance; 2. Submit proposals for remedial actions to IEC within 3 working days of notification; 3. Implement the agreed proposals; 4. Resubmit proposals if problem still not under control; 5. Stop the relevant portion of works as determined by the ER until the exceedance is abated. |

Appendix G

VALID CALIBRATION CERTIFICATES



ALS Laboratory Group

ANALYTICAL CHEMISTRY & TESTING SERVICES

SUB-CONTRACTING REPORT

| | | | |
|---------|---------------------------------------------------------------------------------------------------|----------------|---------------|
| CONTACT | : MR BEN TAM | WORK ORDER | : HK1603561 |
| CLIENT | : ACTION UNITED ENVIRONMENT SERVICES AND CONSULTING | | |
| ADDRESS | : RM A 20/F., GOLD KING IND BLDG, NO. 35-41 TAI LIN PAI ROAD, KWAI CHUNG, N.T. HONG KONG | SUB-BATCH | : 1 |
| | | DATE RECEIVED | : 21-JAN-2016 |
| | | DATE OF ISSUE | : 25-JAN-2016 |
| PROJECT | : ---- | NO. OF SAMPLES | : 1 |
| | | CLIENT ORDER | : ---- |

General Comments

- Sample(s) were received in an ambient condition.
- Sample(s) analysed and reported on an as received basis.
- Calibration was subcontracted to and analysed by Action United Enviro Services.

Signatories

This document has been signed by those names that appear on this report and are the authorised signatories.

Signatories

Position

Richard Fung

General Manager

This is the Final Report and supersedes any preliminary report with this batch number.
Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release.

ALS Technichem (HK) Pty Ltd
Part of the ALS Laboratory Group

11/F, Chung Shun Knitting Centre 1 - 3 Wing Yip Street Kwai Chung N.T. Hong Kong
Tel. +852 2610 1044 Fax. +852 2610 2021 www.alsglobal.com

WORK ORDER : HK1603561
SUB-BATCH : 1
CLIENT : ACTION UNITED ENVIRONMENT SERVICES AND CONSULTING
PROJECT : ----



| ALS Lab ID | Client's Sample ID | Sample Type | Sample Date | External Lab Report No. |
|---------------|--------------------|-------------|-------------|-------------------------|
| HK1603561-001 | S/N: 366410 | AIR | 21-JAN-2016 | S/N: 366410 |

Equipment Verification Report (TSP)

Equipment Calibrated:

Type: Laser Dust monitor
Manufacturer: Sibata LD-3B
Serial No. 366410
Equipment Ref: EQ110
Job Order

Standard Equipment:

Standard Equipment: Higher Volume Sampler
Location & Location ID: AUES office (calibration room)
Equipment Ref: HVS 018
Last Calibration Date: 2 January 2016

Equipment Verification Results:

Testing Date: 4 to 6 January 2016

| Hour | Time | Mean Temp °C | Mean Pressure (hPa) | Concentration in mg/m ³ (Standard Equipment) | Total Count (Calibrated Equipment) | Count/Minute (Total Count/60min) |
|----------|---------------|--------------|---------------------|---------------------------------------------------------|------------------------------------|----------------------------------|
| 2hr17min | 17:30 ~ 19:47 | 20.6 | 1018.9 | 0.027 | 1566 | 11.4 |
| 2hr42min | 17:00 ~ 19:42 | 20.7 | 1015.9 | 0.021 | 1422 | 8.7 |
| 2hr21min | 18:00 ~ 20:21 | 20.9 | 1018.8 | 0.051 | 3318 | 23.4 |

Sensitivity Adjustment Scale Setting (Before Calibration) 660 (CPM)


Sensitivity Adjustment Scale Setting (After Calibration) 661 (CPM)

Linear Regression of Y or X

Slope (K-factor): 0.0022
Correlation Coefficient 0.9986
Date of Issue 11 January 2016

Remarks:

1. **Strong** Correlation ($R > 0.8$)
 2. Factor 0.0022 should be apply for TSP monitoring
- *If $R < 0.5$, repair or re-verification is required for the equipment

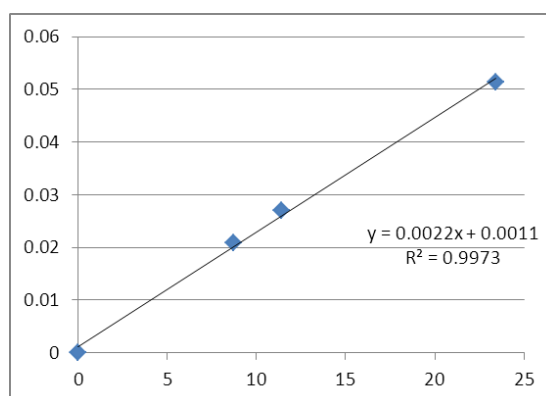

Operator : Donald Kwok Signature :  Date : 12 January 2016

QC Reviewer : Ben Tam Signature :  Date : 12 January 2016

TSP SAMPLER CALIBRATION CALCULATION SPREADSHEET

Location : Gold King Industrial Building, Kwai Chung
 Location ID : Calibration Room

Date of Calibration: 2-Jan-16
 Next Calibration Date: 2-Apr-16

CONDITIONS

| | | | |
|--------------------------|------|----------------------------|-------|
| Sea Level Pressure (hPa) | 1022 | Corrected Pressure (mm Hg) | 766.5 |
| Temperature (°C) | 18.9 | Temperature (K) | 292 |

CALIBRATION ORIFICE

| | | | |
|--------------------|-----------|-------------------|-----------|
| Make-> | TISCH | Qstd Slope -> | 2.10265 |
| Model-> | 5025A | Qstd Intercept -> | -0.00335 |
| Calibration Date-> | 24-Mar-15 | Expiry Date-> | 24-Mar-16 |

CALIBRATION

| Plate No. | H2O (L) (in) | H2O (R) (in) | H2O (in) | Qstd (m3/min) | I (chart) | IC corrected | LINEAR REGRESSION |
|-----------|--------------|--------------|----------|---------------|-----------|--------------|-----------------------------------------------------------------|
| 18 | 4.1 | 4.1 | 8.2 | 1.384 | 56 | 56.82 | Slope = 30.1332 Intercept = 15.8637 Corr. coeff. = 0.9950 |
| 13 | 3.2 | 3.2 | 6.4 | 1.222 | 52 | 52.76 | |
| 10 | 2.4 | 2.4 | 4.8 | 1.059 | 48 | 48.71 | |
| 8 | 1.6 | 1.6 | 3.2 | 0.865 | 42 | 42.62 | |
| 5 | 1.0 | 1.0 | 2.0 | 0.684 | 35 | 35.51 | |

Calculations :

$$Qstd = 1/m[\text{Sqrt}(H2O(Pa/Pstd)(Tstd/Ta))-b]$$

$$IC = I[\text{Sqrt}(Pa/Pstd)(Tstd/Ta)]$$

Qstd = standard flow rate

IC = corrected chart responses

I = actual chart response

m = calibrator Qstd slope

b = calibrator Qstd intercept

Ta = actual temperature during calibration (deg K)

Pstd = actual pressure during calibration (mm Hg)

For subsequent calculation of sampler flow:

$$1/m((I)[\text{Sqrt}(298/Tav)(Pav/760)]-b)$$

m = sampler slope


b = sampler intercept

I = chart response

Tav = daily average temperature

Pav = daily average pressure

FLOW RATE CHART

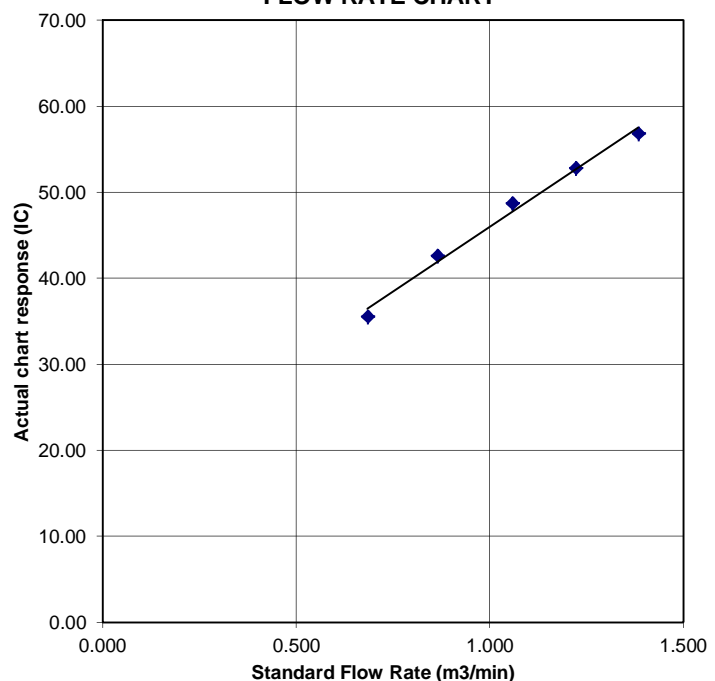



ALS Laboratory Group

ANALYTICAL CHEMISTRY & TESTING SERVICES

SUB-CONTRACTING REPORT

| | | | |
|---------|---------------------------------------------------------------------------------------------------|----------------|---------------|
| CONTACT | : MR BEN TAM | WORK ORDER | : HK1618634 |
| CLIENT | : ACTION UNITED ENVIRONMENT SERVICES AND CONSULTING | | |
| ADDRESS | : RM A 20/F., GOLD KING IND BLDG, NO. 35-41 TAI LIN PAI ROAD, KWAI CHUNG, N.T. HONG KONG | SUB-BATCH | : 1 |
| | | DATE RECEIVED | : 2-APR-2016 |
| | | DATE OF ISSUE | : 12-MAY-2016 |
| PROJECT | : ---- | NO. OF SAMPLES | : 1 |
| | | CLIENT ORDER | : ---- |

General Comments

- Sample(s) were received in an ambient condition.
- Sample(s) analysed and reported on an as received basis.
- Calibration was subcontracted to and analysed by Action United Enviro Services.

Signatories

This document has been signed by those names that appear on this report and are the authorised signatories.

Signatories

Position

Richard Fung

General Manager

This is the Final Report and supersedes any preliminary report with this batch number.
Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release.

ALS Technichem (HK) Pty Ltd
Part of the ALS Laboratory Group

11/F. Chung Shun Knitting Centre 1 - 3 Wing Yip Street Kwai Chung N.T. Hong Kong
Tel. +852 2610 1044 Fax. +852 2610 2021 www.alsglobal.com

WORK ORDER : HK1618634
SUB-BATCH : 1
CLIENT : ACTION UNITED ENVIRONMENT SERVICES AND CONSULTING
PROJECT : ----



| ALS Lab ID | Client's Sample ID | Sample Type | Sample Date | External Lab Report No. |
|---------------|--------------------|-------------|-------------|-------------------------|
| HK1618634-001 | S/N: 456658 | AIR | 02-APR-2016 | S/N: 456658 |

Equipment Verification Report (TSP)

Equipment Calibrated:

Type: Laser Dust monitor
Manufacturer: Sibata LD-3B
Serial No. 456658
Equipment Ref: EQ115
Job Order HK1618634

Standard Equipment:

Standard Equipment: Higher Volume Sampler
Location & Location ID: AUES office (calibration room)
Equipment Ref: HVS 018
Last Calibration Date: 22 Mar 2016

Equipment Verification Results:

Calibration Date: 3 April 2016

| Hour | Time | Mean Temp °C | Mean Pressure (hPa) | Concentration in mg/m ³ (Standard Equipment) | Total Count (Calibrated Equipment) | Count/Minute (Total Count/60min) |
|----------|---------------|--------------|---------------------|---------------------------------------------------------|------------------------------------|----------------------------------|
| 2hr00min | 10:15 ~ 12:15 | 23.0 | 1014.6 | 0.056 | 3014 | 25.1 |
| 2hr00min | 12:20 ~ 14:20 | 23.0 | 1014.6 | 0.032 | 1599 | 13.3 |
| 2hr00min | 14:25 ~ 16:25 | 23.0 | 1014.6 | 0.039 | 1743 | 14.5 |

Sensitivity Adjustment Scale Setting (Before Calibration) 700 (CPM)


Sensitivity Adjustment Scale Setting (After Calibration) 703 (CPM)

Linear Regression of Y or X

Slope (K-factor): 0.0022

Correlation Coefficient (R) 0.9919

Date of Issue 6 April 2016

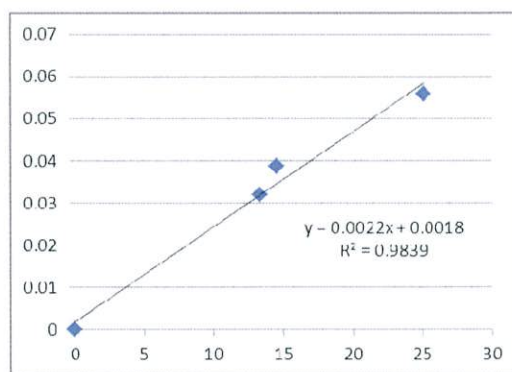

Remarks:

1. **Strong** Correlation ($R > 0.8$)
2. Factor 0.0022 should be apply for TSP monitoring

*If $R < 0.5$, repair or re-verification is required for the equipment

Operator : Donald Kwok Signature :  Date : 6 April 2016

QC Reviewer : Ben Tam Signature :  Date : 6 April 2016

TSP SAMPLER CALIBRATION CALCULATION SPREADSHEET

| | | |
|---------------|-------------------------------------------|----------------------------------|
| Location : | Gold King Industrial Building, Kwai Chung | Date of Calibration: 22-Mar-16 |
| Location ID : | Calibration Room | Next Calibration Date: 22-Jun-16 |

CONDITIONS

| | | | |
|--------------------------|--------|----------------------------|--------|
| Sea Level Pressure (hPa) | 1013.4 | Corrected Pressure (mm Hg) | 760.05 |
| Temperature (°C) | 16.6 | Temperature (K) | 290 |

CALIBRATION ORIFICE

| | | | |
|--------------------|-----------|-------------------|-----------|
| Make-> | TISCH | Qstd Slope -> | 2.10265 |
| Model-> | 5025A | Qstd Intercept -> | -0.00335 |
| Calibration Date-> | 24-Mar-15 | Expiry Date-> | 24-Mar-16 |

CALIBRATION

| Plate No. | H2O (L) (in) | H2O (R) (in) | H2O (in) | Qstd (m3/min) | I (chart) | IC corrected | LINEAR REGRESSION |
|-----------|--------------|--------------|----------|---------------|-----------|--------------|-----------------------------------------------------------------|
| 18 | 4.2 | 4.2 | 8.4 | 1.400 | 57 | 57.82 | Slope = 31.6915 Intercept = 13.9178 Corr. coeff. = 0.9946 |
| 13 | 3.2 | 3.2 | 6.4 | 1.222 | 52 | 52.75 | |
| 10 | 2.4 | 2.4 | 4.8 | 1.059 | 47 | 47.68 | |
| 8 | 1.6 | 1.6 | 3.2 | 0.865 | 42 | 42.61 | |
| 5 | 1.1 | 1.1 | 2.2 | 0.717 | 35 | 35.51 | |

Calculations :

$$Qstd = 1/m[\text{Sqrt}(H2O(Pa/Pstd)(Tstd/Ta))-b]$$

$$IC = I[\text{Sqrt}(Pa/Pstd)(Tstd/Ta)]$$

Qstd = standard flow rate

IC = corrected chart responses

I = actual chart response

m = calibrator Qstd slope

b = calibrator Qstd intercept

Ta = actual temperature during calibration (deg K

Pstd = actual pressure during calibration (mm Hg

For subsequent calculation of sampler flow:

$$1/m((I) [\text{Sqrt}(298/Tav)(Pav/760)]-b)$$

m = sampler slope


b = sampler intercept

I = chart response

Tav = daily average temperature

Pav = daily average pressure

FLOW RATE CHART

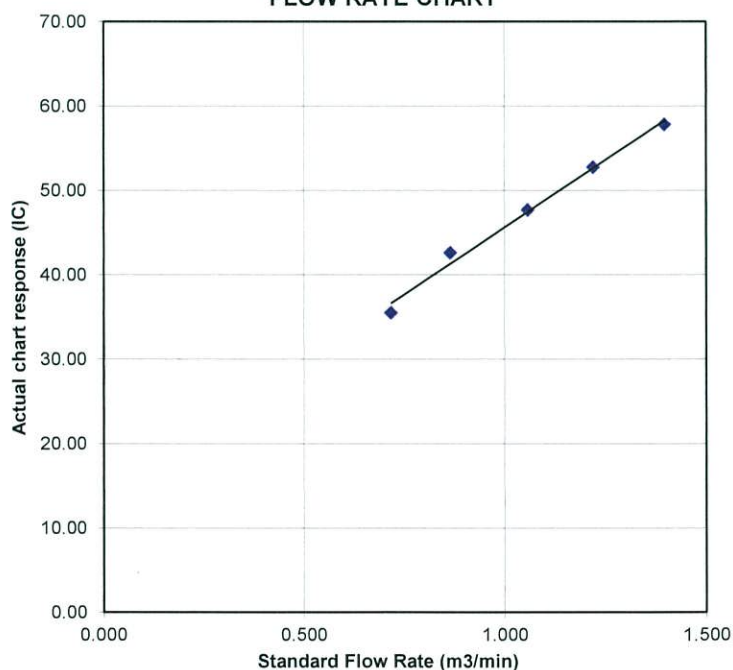



ALS Laboratory Group

ANALYTICAL CHEMISTRY & TESTING SERVICES

SUB-CONTRACTING REPORT

| | | | |
|---------|---------------------------------------------------------------------------------------------------|----------------|---------------|
| CONTACT | : MR BEN TAM | WORK ORDER | : HK1618611 |
| CLIENT | : ACTION UNITED ENVIRONMENT SERVICES AND CONSULTING | | |
| ADDRESS | : RM A 20/F., GOLD KING IND BLDG, NO. 35-41 TAI LIN PAI ROAD, KWAI CHUNG, N.T. HONG KONG | SUB-BATCH | : 1 |
| | | DATE RECEIVED | : 2-APR-2016 |
| | | DATE OF ISSUE | : 12-MAY-2016 |
| PROJECT | : ---- | NO. OF SAMPLES | : 1 |
| | | CLIENT ORDER | : ---- |

General Comments

- Sample(s) were received in an ambient condition.
- Sample(s) analysed and reported on an as received basis.
- Calibration was subcontracted to and analysed by Action United Enviro Services.

Signatories

This document has been signed by those names that appear on this report and are the authorised signatories.

Signatories

Position

Richard Fung

General Manager

This is the Final Report and supersedes any preliminary report with this batch number.
Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release.

ALS Technichem (HK) Pty Ltd
Part of the ALS Laboratory Group

11/F, Chung Shun Knitting Centre 1 - 3 Wing Yip Street Kwai Chung N.T. Hong Kong
Tel. +852 2610 1044 Fax. +852 2610 2021 www.alsglobal.com

WORK ORDER : HK1618611
SUB-BATCH : 1
CLIENT : ACTION UNITED ENVIRONMENT SERVICES AND CONSULTING
PROJECT : ----



| ALS Lab ID | Client's Sample ID | Sample Type | Sample Date | External Lab Report No. |
|---------------|--------------------|-------------|-------------------|-------------------------|
| HK1618611-001 | S/N: 366407 | AIR | 02-APR-2016 00:00 | S/N: 366407 |

Equipment Verification Report (TSP)

Equipment Calibrated:

Type: Laser Dust monitor
Manufacturer: Sibata LD-3B
Serial No. 366407
Equipment Ref: EQ107
Job Order HK1618611

Standard Equipment:

Standard Equipment: Higher Volume Sampler
Location & Location ID: AUES office (calibration room)
Equipment Ref: HVS 018
Last Calibration Date: 22 Mar 2016

Equipment Verification Results:

Testing Date: 3 April 2016


| Hour | Time | Mean Temp °C | Mean Pressure (hPa) | Concentration in mg/m ³ (Standard Equipment) | Total Count (Calibrated Equipment) | Count/Minute (Total Count/60min) |
|----------|---------------|--------------|---------------------|---------------------------------------------------------|------------------------------------|----------------------------------|
| 2hr00min | 10:15 ~ 12:15 | 23.0 | 1014.6 | 0.056 | 3106 | 25.9 |
| 2hr00min | 12:20 ~ 14:20 | 23.0 | 1014.6 | 0.032 | 1811 | 15.1 |
| 2hr00min | 14:25 ~ 16:25 | 23.0 | 1014.6 | 0.039 | 1912 | 15.9 |

Sensitivity Adjustment Scale Setting (Before Calibration) 570 (CPM)

Sensitivity Adjustment Scale Setting (After Calibration) 568 (CPM)

Linear Regression of Y or X

Slope (K-factor): 0.0022
Correlation Coefficient (R): 0.9955
Date of Issue 6 April 2016

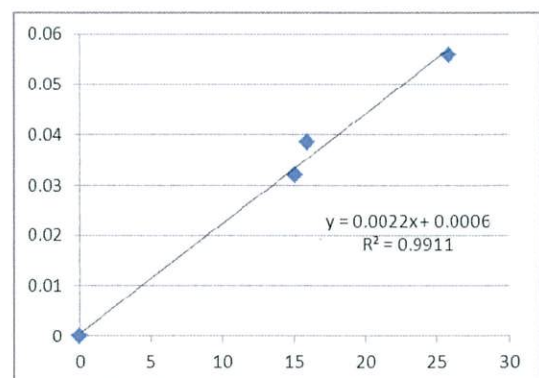

Remarks:

1. **Strong** Correlation ($R > 0.8$)
 2. Factor 0.0022 should be apply for TSP monitoring
- *If $R < 0.5$, repair or re-verification is required for the equipment

Operator: Donald Kwok Signature:  Date: 6 April 2016

QC Reviewer: Ben Tam Signature:  Date: 6 April 2016

TSP SAMPLER CALIBRATION CALCULATION SPREADSHEET

Location : Gold King Industrial Building, Kwai Chung
 Location ID : Calibration Room

Date of Calibration: 22-Mar-16
 Next Calibration Date: 22-Jun-16

CONDITIONS

Sea Level Pressure (hPa) 1013.4
 Temperature (°C) 16.6

Corrected Pressure (mm Hg) 760.05
 Temperature (K) 290

CALIBRATION ORIFICE

Make-> TISCH
 Model-> 5025A
 Calibration Date-> 24-Mar-15

Qstd Slope -> 2.10265
 Qstd Intercept -> -0.00335
 Expiry Date-> 24-Mar-16

CALIBRATION

| Plate No. | H2O (L) (in) | H2O (R) (in) | H2O (in) | Qstd (m3/min) | I (chart) | IC corrected | LINEAR REGRESSION |
|-----------|--------------|--------------|----------|---------------|-----------|--------------|-----------------------------------------------------------------|
| 18 | 4.2 | 4.2 | 8.4 | 1.400 | 57 | 57.82 | Slope = 31.6915 Intercept = 13.9178 Corr. coeff. = 0.9946 |
| 13 | 3.2 | 3.2 | 6.4 | 1.222 | 52 | 52.75 | |
| 10 | 2.4 | 2.4 | 4.8 | 1.059 | 47 | 47.68 | |
| 8 | 1.6 | 1.6 | 3.2 | 0.865 | 42 | 42.61 | |
| 5 | 1.1 | 1.1 | 2.2 | 0.717 | 35 | 35.51 | |

Calculations :

$$Q_{std} = 1/m[\sqrt{H_2O(P_a/P_{std})(T_{std}/T_a)} - b]$$

$$IC = I[\sqrt{P_a/P_{std}}(T_{std}/T_a)]$$

Qstd = standard flow rate

IC = corrected chart responses

I = actual chart response

m = calibrator Qstd slope

b = calibrator Qstd intercept

Ta = actual temperature during calibration (deg K)

Pstd = actual pressure during calibration (mm Hg)

For subsequent calculation of sampler flow:

$$1/m((I) [\sqrt{298/T_{av}}(P_{av}/760)] - b)$$

m = sampler slope


b = sampler intercept

I = chart response

Tav = daily average temperature

Pav = daily average pressure

FLOW RATE CHART

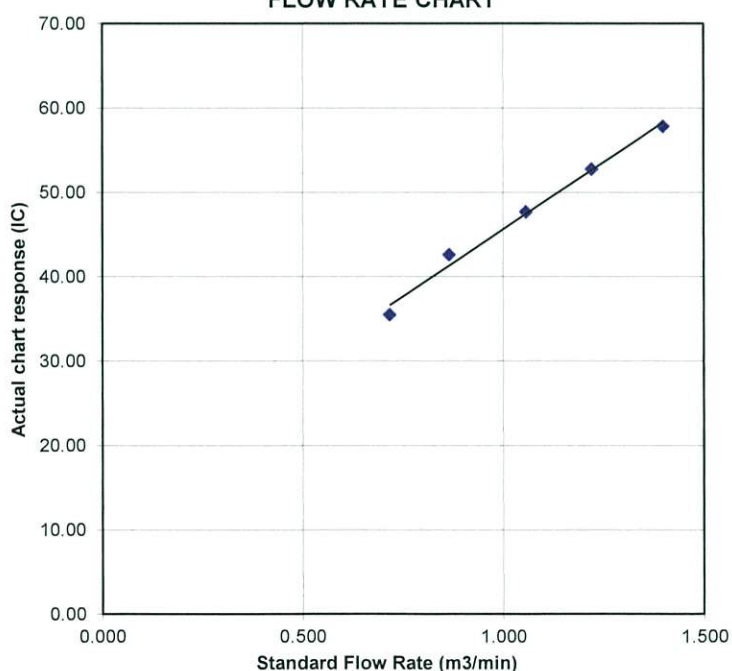



ALS Laboratory Group

ANALYTICAL CHEMISTRY & TESTING SERVICES

SUB-CONTRACTING REPORT

| | | | |
|---------|---------------------------------------------------------------------------------------------------|----------------|---------------|
| CONTACT | : MR BEN TAM | WORK ORDER | : HK1618617 |
| CLIENT | : ACTION UNITED ENVIRONMENT SERVICES AND CONSULTING | | |
| ADDRESS | : RM A 20/F., GOLD KING IND BLDG, NO. 35-41 TAI LIN PAI ROAD, KWAI CHUNG, N.T. HONG KONG | SUB-BATCH | : 1 |
| | | DATE RECEIVED | : 2-APR-2016 |
| | | DATE OF ISSUE | : 12-MAY-2016 |
| PROJECT | : ---- | NO. OF SAMPLES | : 1 |
| | | CLIENT ORDER | : ---- |

General Comments

- Sample(s) were received in an ambient condition.
- Sample(s) analysed and reported on an as received basis.
- Calibration was subcontracted to and analysed by Action United Enviro Services.

Signatories

This document has been signed by those names that appear on this report and are the authorised signatories.

Signatories

Position

Richard Fung

General Manager

This is the Final Report and supersedes any preliminary report with this batch number.
Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release.

ALS Technichem (HK) Pty Ltd
Part of the ALS Laboratory Group

11/F, Chung Shun Knitting Centre 1 - 3 Wing Yip Street Kwai Chung N.T. Hong Kong
Tel. +852 2610 1044 Fax. +852 2610 2021 www.alsglobal.com

WORK ORDER : HK1618617
SUB-BATCH : 1
CLIENT : ACTION UNITED ENVIRONMENT SERVICES AND CONSULTING
PROJECT : ----



| ALS Lab ID | Client's Sample ID | Sample Type | Sample Date | External Lab Report No. |
|---------------|--------------------|-------------|-------------|-------------------------|
| HK1618617-001 | S/N: 366418 | AIR | 02-APR-2016 | S/N: 366418 |

Equipment Verification Report (TSP)

Equipment Calibrated:

Type: Laser Dust monitor
Manufacturer: Sibata LD-3B
Serial No. 366418
Equipment Ref: EQ108
Job Order HK1618617

Standard Equipment:

Standard Equipment: Higher Volume Sampler
Location & Location ID: AUES office (calibration room)
Equipment Ref: HVS 018
Last Calibration Date: 22 Mar 2016

Equipment Verification Results:

Calibration Date: 3 April 2016

| Hour | Time | Mean Temp °C | Mean Pressure (hPa) | Concentration in mg/m ³ (Standard Equipment) | Total Count (Calibrated Equipment) | Count/Minute (Total Count/60min) |
|----------|---------------|--------------|---------------------|---------------------------------------------------------|------------------------------------|----------------------------------|
| 2hr00min | 10:15 ~ 12:15 | 23.0 | 1014.6 | 0.056 | 3126 | 26.1 |
| 2hr00min | 12:20 ~ 14:20 | 23.0 | 1014.6 | 0.032 | 1688 | 14.1 |
| 2hr00min | 14:25 ~ 16:25 | 23.0 | 1014.6 | 0.039 | 1707 | 14.2 |

Sensitivity Adjustment Scale Setting (Before Calibration) 677 (CPM)

Sensitivity Adjustment Scale Setting (After Calibration) 679 (CPM)

Linear Regression of Y or X

Slope (K-factor): 0.0022


Correlation Coefficient (R) 0.9864

Date of Issue 6 April 2016

Remarks:

1. **Strong** Correlation ($R > 0.8$)
2. Factor 0.0022 should be apply for TSP monitoring

*If $R < 0.5$, repair or re-verification is required for the equipment

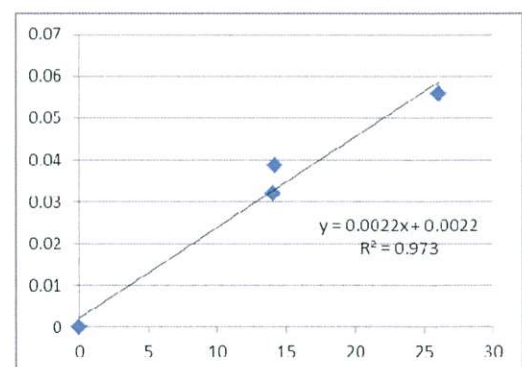

Operator: Donald Kwok Signature:  Date: 6 April 2016

QC Reviewer: Ben Tam Signature:  Date: 6 April 2016

TSP SAMPLER CALIBRATION CALCULATION SPREADSHEET

Location : Gold King Industrial Building, Kwai Chung
 Location ID : Calibration Room

Date of Calibration: 22-Mar-16
 Next Calibration Date: 22-Jun-16

CONDITIONS

Sea Level Pressure (hPa) 1013.4
 Temperature (°C) 16.6

Corrected Pressure (mm Hg) 760.05
 Temperature (K) 290

CALIBRATION ORIFICE

Make-> TISCH
 Model-> 5025A
 Calibration Date-> 24-Mar-15

Qstd Slope -> 2.10265
 Qstd Intercept -> -0.00335
 Expiry Date-> 24-Mar-16

CALIBRATION

| Plate No. | H2O (L) (in) | H2O (R) (in) | H2O (in) | Qstd (m3/min) | I (chart) | IC corrected | LINEAR REGRESSION |
|-----------|--------------|--------------|----------|---------------|-----------|--------------|-----------------------------------------------------------------|
| 18 | 4.2 | 4.2 | 8.4 | 1.400 | 57 | 57.82 | Slope = 31.6915 Intercept = 13.9178 Corr. coeff. = 0.9946 |
| 13 | 3.2 | 3.2 | 6.4 | 1.222 | 52 | 52.75 | |
| 10 | 2.4 | 2.4 | 4.8 | 1.059 | 47 | 47.68 | |
| 8 | 1.6 | 1.6 | 3.2 | 0.865 | 42 | 42.61 | |
| 5 | 1.1 | 1.1 | 2.2 | 0.717 | 35 | 35.51 | |

Calculations :

$$Qstd = 1/m[\text{Sqrt}(H2O(Pa/Pstd)(Tstd/Ta))-b]$$

$$IC = I[\text{Sqrt}(Pa/Pstd)(Tstd/Ta)]$$

Qstd = standard flow rate

IC = corrected chart responses

I = actual chart response

m = calibrator Qstd slope

b = calibrator Qstd intercept

Ta = actual temperature during calibration (deg K

Pstd = actual pressure during calibration (mm Hg

For subsequent calculation of sampler flow:

$$1/m((I)[\text{Sqrt}(298/Tav)(Pav/760)]-b)$$

m = sampler slope


b = sampler intercept

I = chart response

Tav = daily average temperature

Pav = daily average pressure

FLOW RATE CHART

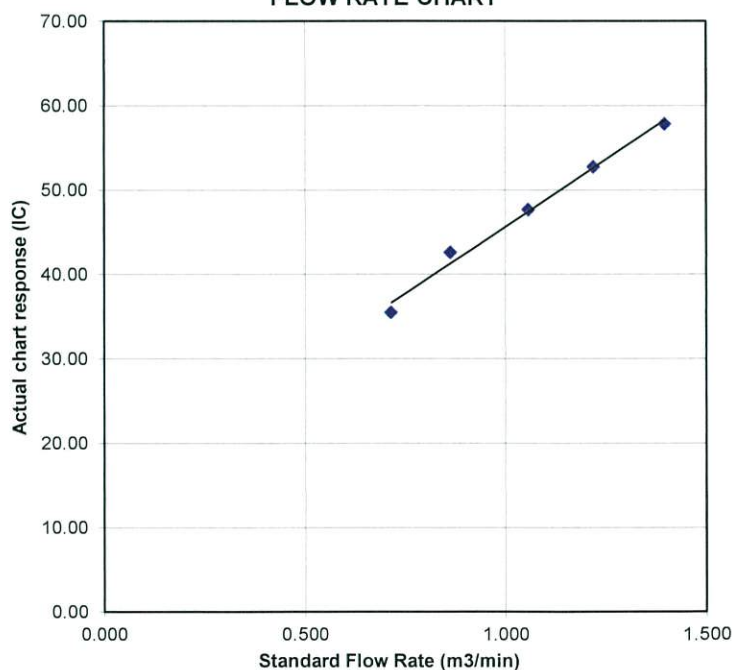

Certificate of Calibration

校正證書

Certificate No. : C162440
證書編號

ITEM TESTED / 送檢項目 (Job No. / 序引編號 : IC16-0843)

Date of Receipt / 收件日期 : 5 May 2016

Description / 儀器名稱 : Sound Level Meter (EQ011)
Manufacturer / 製造商 : Rion
Model No. / 型號 : NL-52
Serial No. / 編號 : 01121362
Supplied By / 委託者 : Action-United Environmental Services and Consulting
Unit A, 20/F., Gold King Industrial Building,
35-41 Tai Lin Pai Road, Kwai Chung, N.T.

TEST CONDITIONS / 測試條件

Temperature / 溫度 : $(23 \pm 2)^{\circ}\text{C}$
Line Voltage / 電壓 : ---

Relative Humidity / 相對濕度 : $(55 \pm 20)\%$

TEST SPECIFICATIONS / 測試規範

Calibration check

DATE OF TEST / 測試日期 : 10 May 2016

TEST RESULTS / 測試結果

The results apply to the particular unit-under-test only.
The results do not exceed manufacturer's specification.
The results are detailed in the subsequent page(s).

The test equipment used for calibration are traceable to National Standards via :

- The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory
- Agilent Technologies / Keysight Technologies
- Rohde & Schwarz Laboratory, Germany
- Fluke Everett Service Center, USA

Tested By : 
測試 : H T Wong
Technical Officer

Certified By : 
核證 : K C Lee
Project Engineer

Date of Issue : 11 May 2016
簽發日期

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗室書面批准。

Certificate of Calibration

校正證書

Certificate No. : C162440
證書編號

- The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 12 hours, and switched on to warm up for over 10 minutes before the commencement of the test.
- Self-calibration was performed before the test.
- The results presented are the mean of 3 measurements at each calibration point.
- Test equipment :

| Equipment ID | Description | Certificate No. |
|--------------|-------------------------------------|-----------------|
| CL280 | 40 MHz Arbitrary Waveform Generator | C160077 |
| CL281 | Multifunction Acoustic Calibrator | PA160023 |

- Test procedure : MA101N.

- Results :

6.1 Sound Pressure Level

6.1.1 Reference Sound Pressure Level

| UUT Setting | | | | Applied Value | | UUT Reading (dB) | IEC 61672 Class 1 Spec. (dB) |
|-------------|----------------|---------------------|----------------|---------------|-------------|------------------|------------------------------|
| Range (dB) | Function | Frequency Weighting | Time Weighting | Level (dB) | Freq. (kHz) | | |
| 30 - 130 | L _A | A | Fast | 94.00 | 1 | 93.3 | ± 1.1 |

6.1.2 Linearity

| UUT Setting | | | | Applied Value | | UUT Reading (dB) |
|-------------|----------------|---------------------|----------------|---------------|-------------|------------------|
| Range (dB) | Function | Frequency Weighting | Time Weighting | Level (dB) | Freq. (kHz) | |
| 30 - 130 | L _A | A | Fast | 94.00 | 1 | 93.3 (Ref.) |
| | | | | 104.00 | | 103.3 |
| | | | | 114.00 | | 113.3 |

IEC 61672 Class 1 Spec. : ± 0.6 dB per 10 dB step and ± 1.1 dB for overall different.

6.2 Time Weighting

| UUT Setting | | | | Applied Value | | UUT Reading (dB) | IEC 61672 Class 1 Spec. (dB) |
|-------------|----------------|---------------------|----------------|---------------|-------------|------------------|------------------------------|
| Range (dB) | Function | Frequency Weighting | Time Weighting | Level (dB) | Freq. (kHz) | | |
| 30 - 130 | L _A | A | Fast | 94.00 | 1 | 93.3 | Ref. |
| | | | Slow | | | 93.3 | ± 0.3 |

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗室所書面批准。

Certificate of Calibration

校正證書

Certificate No. : C162440
證書編號

6.3 Frequency Weighting

6.3.1 A-Weighting

| UUT Setting | | | | Applied Value | | UUT Reading (dB) | IEC 61672 Class 1 Spec. (dB) |
|-------------|----------------|---------------------|----------------|---------------|----------|------------------|------------------------------|
| Range (dB) | Function | Frequency Weighting | Time Weighting | Level (dB) | Freq. | | |
| 30 - 130 | L _A | A | Fast | 94.00 | 63 Hz | 67.0 | -26.2 ± 1.5 |
| | | | | | 125 Hz | 77.1 | -16.1 ± 1.5 |
| | | | | | 250 Hz | 84.6 | -8.6 ± 1.4 |
| | | | | | 500 Hz | 90.1 | -3.2 ± 1.4 |
| | | | | | 1 kHz | 93.3 | Ref. |
| | | | | | 2 kHz | 94.5 | +1.2 ± 1.6 |
| | | | | | 4 kHz | 94.3 | +1.0 ± 1.6 |
| | | | | | 8 kHz | 92.3 | -1.1 (+2.1 ; -3.1) |
| | | | | | 12.5 kHz | 88.9 | -4.3 (+3.0 ; -6.0) |

6.3.2 C-Weighting

| UUT Setting | | | | Applied Value | | UUT Reading (dB) | IEC 61672 Class 1 Spec. (dB) |
|-------------|----------------|---------------------|----------------|---------------|----------|------------------|------------------------------|
| Range (dB) | Function | Frequency Weighting | Time Weighting | Level (dB) | Freq. | | |
| 30 - 130 | L _C | C | Fast | 94.00 | 63 Hz | 92.5 | -0.8 ± 1.5 |
| | | | | | 125 Hz | 93.1 | -0.2 ± 1.5 |
| | | | | | 250 Hz | 93.3 | 0.0 ± 1.4 |
| | | | | | 500 Hz | 93.3 | 0.0 ± 1.4 |
| | | | | | 1 kHz | 93.3 | Ref. |
| | | | | | 2 kHz | 93.1 | -0.2 ± 1.6 |
| | | | | | 4 kHz | 92.5 | -0.8 ± 1.6 |
| | | | | | 8 kHz | 90.4 | -3.0 (+2.1 ; -3.1) |
| | | | | | 12.5 kHz | 86.9 | -6.2 (+3.0 ; -6.0) |

Remarks : - UUT Microphone Model No. : UC-59 & S/N : 07549

- Mfr's Spec. : IEC 61672 Class 1

- Uncertainties of Applied Value :

| | | |
|--------|-----------------|--------------------------|
| 94 dB | 63 Hz - 125 Hz | : ± 0.35 dB |
| | 250 Hz - 500 Hz | : ± 0.30 dB |
| | 1 kHz | : ± 0.20 dB |
| | 2 kHz - 4 kHz | : ± 0.35 dB |
| | 8 kHz | : ± 0.45 dB |
| | 12.5 kHz | : ± 0.70 dB |
| 104 dB | 1 kHz | : ± 0.10 dB (Ref. 94 dB) |
| 114 dB | 1 kHz | : ± 0.10 dB (Ref. 94 dB) |

- The uncertainties are for a confidence probability of not less than 95 %.

Note :

The values given in this Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environment changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Sun Creation Engineering Limited shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。

Certificate of Calibration

校正證書

Certificate No. : C161796
證書編號

ITEM TESTED / 送檢項目 (Job No. / 序引編號 : IC16-0662)

Date of Receipt / 收件日期 : 22 March 2016

Description / 儀器名稱 : Sound Level Meter (EQ015)
Manufacturer / 製造商 : Rion
Model No. / 型號 : NL-52
Serial No. / 編號 : 00142581
Supplied By / 委託者 : Action-United Environmental Services and Consulting
Unit A, 20/F., Gold King Industrial Building,
35-41 Tai Lin Pai Road, Kwai Chung, N.T.

TEST CONDITIONS / 測試條件

Temperature / 溫度 : $(23 \pm 2)^{\circ}\text{C}$
Line Voltage / 電壓 : ---

Relative Humidity / 相對濕度 : $(55 \pm 20)\%$

TEST SPECIFICATIONS / 測試規範

Calibration check

DATE OF TEST / 測試日期 : 6 April 2016


TEST RESULTS / 測試結果

The results apply to the particular unit-under-test only.
The results do not exceed manufacturer's specification.
The results are detailed in the subsequent page(s).

The test equipment used for calibration are traceable to National Standards via :

- The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory
- Agilent Technologies / Keysight Technologies
- Rohde & Schwarz Laboratory, Germany
- Fluke Everett Service Center, USA

Tested By
測試


H T Wong
Technical Officer

Certified By
核證


K/C Lee
Project Engineer

Date of Issue :
簽發日期

7 April 2016

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。

Sun Creation Engineering Limited – Calibration & Testing Laboratory

c/o 4/F, Tsing Shan Wan Exchange Building, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong

輝創工程有限公司 – 校正及檢測實驗室

c/o 香港新界屯門興安里一號青山灣機樓四樓

Tel/電話: 2927 2606 Fax/傳真: 2744 8986

E-mail/電郵: callab@suncreation.com

Website/網址: www.suncreation.com

Certificate of Calibration

校正證書

Certificate No. : C161796
證書編號

- The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 12 hours, and switched on to warm up for over 10 minutes before the commencement of the test.
- Self-calibration was performed before the test.
- The results presented are the mean of 3 measurements at each calibration point.
- Test equipment :

| Equipment ID | Description | Certificate No. |
|--------------|-------------------------------------|-----------------|
| CL280 | 40 MHz Arbitrary Waveform Generator | C160077 |
| CL281 | Multifunction Acoustic Calibrator | PA160023 |

- Test procedure : MA101N.

- Results :

- 6.1 Sound Pressure Level

- 6.1.1 Reference Sound Pressure Level

| UUT Setting | | | | Applied Value | | UUT | IEC 61672 |
|-------------|----------------|---------------------|----------------|---------------|-------------|--------------|--------------------|
| Range (dB) | Function | Frequency Weighting | Time Weighting | Level (dB) | Freq. (kHz) | Reading (dB) | Class 1 Spec. (dB) |
| 30 - 130 | L _A | A | Fast | 94.00 | 1 | 94.4 | ± 1.1 |

- 6.1.2 Linearity

| UUT Setting | | | | Applied Value | | UUT |
|-------------|----------------|---------------------|----------------|---------------|-------------|--------------|
| Range (dB) | Function | Frequency Weighting | Time Weighting | Level (dB) | Freq. (kHz) | Reading (dB) |
| 30 - 130 | L _A | A | Fast | 94.00 | 1 | 94.4 (Ref.) |
| | | | | 104.00 | | 104.4 |
| | | | | 114.00 | | 114.4 |

IEC 61672 Class 1 Spec. : ± 0.6 dB per 10 dB step and ± 1.1 dB for overall different.

- 6.2 Time Weighting

| UUT Setting | | | | Applied Value | | UUT | IEC 61672 |
|-------------|----------------|---------------------|----------------|---------------|-------------|--------------|--------------------|
| Range (dB) | Function | Frequency Weighting | Time Weighting | Level (dB) | Freq. (kHz) | Reading (dB) | Class 1 Spec. (dB) |
| 30 - 130 | L _A | A | Fast | 94.00 | 1 | 94.4 | Ref. |
| | | | Slow | | | 94.4 | ± 0.3 |

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗室書面批准。

Sun Creation Engineering Limited – Calibration & Testing Laboratory

c/o 4/F, Tsing Shan Wan Exchange Building, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong

輝創工程有限公司 – 校正及檢測實驗室

c/o 香港新界屯門與安里一號青山灣機樓四樓

Tel/電話: 2927 2606

Fax/傳真: 2744 8986

E-mail/電郵: callab@suncreation.com

Website/網址: www.suncreation.com

Certificate of Calibration

校正證書

Certificate No. : C161796
證書編號

6.3 Frequency Weighting

6.3.1 A-Weighting

| UUT Setting | | | | Applied Value | | UUT Reading (dB) | IEC 61672 Class 1 Spec. (dB) |
|-------------|----------------|---------------------|----------------|---------------|----------|------------------|------------------------------|
| Range (dB) | Function | Frequency Weighting | Time Weighting | Level (dB) | Freq. | | |
| 30 - 130 | L _A | A | Fast | 94.00 | 63 Hz | 68.1 | -26.2 ± 1.5 |
| | | | | | 125 Hz | 78.2 | -16.1 ± 1.5 |
| | | | | | 250 Hz | 85.7 | -8.6 ± 1.4 |
| | | | | | 500 Hz | 91.1 | -3.2 ± 1.4 |
| | | | | | 1 kHz | 94.4 | Ref. |
| | | | | | 2 kHz | 95.6 | +1.2 ± 1.6 |
| | | | | | 4 kHz | 95.4 | +1.0 ± 1.6 |
| | | | | | 8 kHz | 93.3 | -1.1 (+2.1 ; -3.1) |
| | | | | | 12.5 kHz | 89.9 | -4.3 (+3.0 ; -6.0) |

6.3.2 C-Weighting

| UUT Setting | | | | Applied Value | | UUT Reading (dB) | IEC 61672 Class 1 Spec. (dB) |
|-------------|----------------|---------------------|----------------|---------------|----------|------------------|------------------------------|
| Range (dB) | Function | Frequency Weighting | Time Weighting | Level (dB) | Freq. | | |
| 30 - 130 | L _C | C | Fast | 94.00 | 63 Hz | 93.5 | -0.8 ± 1.5 |
| | | | | | 125 Hz | 94.2 | -0.2 ± 1.5 |
| | | | | | 250 Hz | 94.3 | 0.0 ± 1.4 |
| | | | | | 500 Hz | 94.4 | 0.0 ± 1.4 |
| | | | | | 1 kHz | 94.4 | Ref. |
| | | | | | 2 kHz | 94.2 | -0.2 ± 1.6 |
| | | | | | 4 kHz | 93.6 | -0.8 ± 1.6 |
| | | | | | 8 kHz | 91.4 | -3.0 (+2.1 ; -3.1) |
| | | | | | 12.5 kHz | 88.0 | -6.2 (+3.0 ; -6.0) |

Remarks : - UUT Microphone Model No. : UC-59 & S/N : 06015

- Mfr's Spec. : IEC 61672 Class 1

- Uncertainties of Applied Value :

| | |
|------------------------|--------------------------|
| 94 dB : 63 Hz - 125 Hz | : ± 0.35 dB |
| 250 Hz - 500 Hz | : ± 0.30 dB |
| 1 kHz | : ± 0.20 dB |
| 2 kHz - 4 kHz | : ± 0.35 dB |
| 8 kHz | : ± 0.45 dB |
| 12.5 kHz | : ± 0.70 dB |
| 104 dB : 1 kHz | : ± 0.10 dB (Ref. 94 dB) |
| 114 dB : 1 kHz | : ± 0.10 dB (Ref. 94 dB) |

- The uncertainties are for a confidence probability of not less than 95 %.

Note :

The values given in this Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environment changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Sun Creation Engineering Limited shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗室書面批准。

Sun Creation Engineering Limited – Calibration & Testing Laboratory

c/o 4/F, Tsing Shan Wan Exchange Building, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong

輝創工程有限公司 – 校正及檢測實驗室

c/o 香港新界屯門興安里一號青山灣機樓四樓

Tel/電話: 2927 2606 Fax/傳真: 2744 8986 E-mail/電郵: callab@suncreation.com Website/網址: www.suncreation.com

Certificate of Calibration

校正證書

Certificate No. : C162125

證書編號

ITEM TESTED / 送檢項目 (Job No. / 序引編號 : IC16-0843)

Date of Receipt / 收件日期 : 14 April 2016

Description / 儀器名稱 : Acoustical Calibrator (EQ082)

Manufacturer / 製造商 : Brüel & Kjær

Model No. / 型號 : 4231

Serial No. / 編號 : 2713428

Supplied By / 委託者 : Action-United Environmental Services and Consulting
Unit A, 20/F., Gold King Industrial Building,
35-41 Tai Lin Pai Road, Kwai Chung, N.T.

TEST CONDITIONS / 測試條件

Temperature / 溫度 : $(23 \pm 2)^{\circ}\text{C}$

Relative Humidity / 相對濕度 : $(55 \pm 20)\%$

Line Voltage / 電壓 : ---

TEST SPECIFICATIONS / 測試規範

Calibration check

DATE OF TEST / 測試日期 : 22 April 2016

TEST RESULTS / 測試結果

The results apply to the particular unit-under-test only.


The results do not exceed manufacturer's specification.

The results are detailed in the subsequent page(s).


The test equipment used for calibration are traceable to National Standards via :

- The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory
- Agilent Technologies / Keysight Technologies
- Rohde & Schwarz Laboratory, Germany
- Fluke Everett Service Center, USA

Tested By
測試


H T Wong
Technical Officer

Certified By
核證

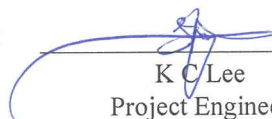
K C Lee
Project Engineer

Date of Issue
簽發日期

25 April 2016

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。

Certificate of Calibration

校正證書

Certificate No. : C162125
證書編號

- The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 12 hours before the commencement of the test.
- The results presented are the mean of 3 measurements at each calibration point.
- Test equipment :

| Equipment ID | Description | Certificate No. |
|--------------|-----------------------------------|-----------------|
| CL130 | Universal Counter | C153519 |
| CL281 | Multifunction Acoustic Calibrator | PA160023 |
| TST150A | Measuring Amplifier | C161175 |

- Test procedure : MA100N.

- Results :

5.1 Sound Level Accuracy

| UUT Nominal Value | Measured Value (dB) | Mfr's Spec. (dB) | Uncertainty of Measured Value (dB) |
|----------------------|------------------------|---------------------|---------------------------------------|
| 94 dB, 1 kHz | 94.0 | ± 0.2 | ± 0.2 |
| 114 dB, 1 kHz | 114.1 | | |

5.2 Frequency Accuracy

| UUT Nominal Value (kHz) | Measured Value (kHz) | Mfr's Spec. | Uncertainty of Measured Value (Hz) |
|----------------------------|-------------------------|---------------|---------------------------------------|
| 1 | 1.000 0 | 1 kHz ± 0.1 % | ± 0.1 |

Remark : The uncertainties are for a confidence probability of not less than 95 %.

Note :

The values given in this Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environment changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Sun Creation Engineering Limited shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗室書面批准。

Certificate of Calibration

校正證書

Certificate No. : C164098
證書編號

ITEM TESTED / 送檢項目 (Job No. / 序引編號 : IC16-0843)

Date of Receipt / 收件日期 : 15 July 2016

Description / 儀器名稱 : Sound Level Calibrator (EQ085)
Manufacturer / 製造商 : Rion
Model No. / 型號 : NC-73
Serial No. / 編號 : 10655561
Supplied By / 委託者 : Action-United Environmental Services and Consulting
Unit A, 20/F., Gold King Industrial Building,
35-41 Tai Lin Pai Road, Kwai Chung, N.T.

TEST CONDITIONS / 測試條件

Temperature / 溫度 : $(23 \pm 2)^{\circ}\text{C}$
Line Voltage / 電壓 : ---

Relative Humidity / 相對濕度 : $(55 \pm 20)\%$

TEST SPECIFICATIONS / 測試規範

Calibration


DATE OF TEST / 測試日期 : 27 July 2016


TEST RESULTS / 測試結果

The results apply to the particular unit-under-test only.
The results do not exceed manufacturer's specification & user's specified acceptance criteria. (after adjustment)
The results are detailed in the subsequent page(s).

The test equipment used for calibration are traceable to National Standards via :

- The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory
- Agilent Technologies / Keysight Technologies
- Rohde & Schwarz Laboratory, Germany
- Fluke Everett Service Center, USA

Tested By : 
測試 : H T Wong
Technical Officer

Certified By : 
核證 : K C Lee
Project Engineer

Date of Issue : 28 July 2016
簽發日期

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗室書面批准。

Certificate of Calibration

校正證書

Certificate No. : C164098
證書編號

- The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 12 hours before the commencement of the test.
- The results presented are the mean of 3 measurements at each calibration point.
- Test equipment :

| Equipment ID | Description | Certificate No. |
|--------------|-----------------------------------|-----------------|
| CL130 | Universal Counter | C163709 |
| CL281 | Multifunction Acoustic Calibrator | PA160023 |
| TST150A | Measuring Amplifier | C161175 |

- Test procedure : MA100N.

- Results :

5.1 Sound Level Accuracy

5.1.1 Before Adjustment

| UUT Nominal Value | Measured Value (dB) | Mfr's Spec. (dB) | Uncertainty of Measured Value (dB) |
|----------------------|------------------------|---------------------|---------------------------------------|
| 94 dB, 1 kHz | * 93.4 | ± 0.5 | ± 0.2 |

* Out of Mfr's Spec.

5.1.2 After Adjustment

| UUT Nominal Value | Measured Value (dB) | Mfr's Spec. (dB) | Uncertainty of Measured Value (dB) |
|----------------------|------------------------|---------------------|---------------------------------------|
| 94 dB, 1 kHz | 94.0 | ± 0.5 | ± 0.2 |

5.2 Frequency Accuracy

5.2.1 Before Adjustment

| UUT Nominal Value (kHz) | Measured Value (kHz) | User's Spec. | Uncertainty of Measured Value (Hz) |
|----------------------------|-------------------------|-----------------|---------------------------------------|
| 1 | 0.955 | 1 kHz ± 6 % | ± 1 |

5.2.2 After Adjustment

| UUT Nominal Value (kHz) | Measured Value (kHz) | User's Spec. | Uncertainty of Measured Value (Hz) |
|----------------------------|-------------------------|-----------------|---------------------------------------|
| 1 | 0.954 | 1 kHz ± 6 % | ± 1 |

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗室書面批准。

Sun Creation Engineering Limited – Calibration & Testing Laboratory
c/o 4/F, Tsing Shan Wan Exchange Building, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong

輝創工程有限公司 – 校正及檢測實驗室
c/o 香港新界屯門興安里一號青山灣機樓四樓

Tel/電話: 2927 2606 Fax/傳真: 2744 8986 E-mail/電郵: callab@suncreation.com Website/網址: www.suncreation.com



輝創工程有限公司
Sun Creation Engineering Limited
Calibration and Testing Laboratory

Certificate of Calibration 校正證書

Certificate No. : C164098
證書編號

Remark : The uncertainties are for a confidence probability of not less than 95 %.

Note :

The values given in this Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environment changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Sun Creation Engineering Limited shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。

Sun Creation Engineering Limited – Calibration & Testing Laboratory
c/o 4/F, Tsing Shan Wan Exchange Building, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong
輝創工程有限公司 – 校正及檢測實驗室
c/o 香港新界屯門興安里一號青山灣機樓四樓
Tel/電話: 2927 2606 Fax/傳真: 2744 8986 E-mail/電郵: callab@suncreation.com Website/網址: www.suncreation.com

Appendix H

IMPACT MONITORING SCHEDULE

Impact Monitoring Schedule for Reporting Month – September 2016

| Date | | Dust Monitoring | | Noise Monitoring |
|------|-----------|-----------------|-------------|------------------|
| | | 1-hour TSP | 24-hour TSP | |
| THU | 1-SEP-16 | | | |
| FRI | 2-SEP-16 | | ✓ | |
| SAT | 3-SEP-16 | | | |
| SUN | 4-SEP-16 | | | |
| MON | 5-SEP-16 | ✓ | | ✓ |
| TUE | 6-SEP-16 | | | |
| WED | 7-SEP-16 | | | |
| THU | 8-SEP-16 | | ✓ | |
| FRI | 9-SEP-16 | | | |
| SAT | 10-SEP-16 | ✓ | | |
| SUN | 11-SEP-16 | | | |
| MON | 12-SEP-16 | | | |
| TUE | 13-SEP-16 | | | |
| WED | 14-SEP-16 | | ✓ | |
| THU | 15-SEP-16 | ✓ | | ✓ |
| FRI | 16-SEP-16 | | | |
| SAT | 17-SEP-16 | | | |
| SUN | 18-SEP-16 | | | |
| MON | 19-SEP-16 | | | |
| TUE | 20-SEP-16 | | ✓ | |
| WED | 21-SEP-16 | ✓ | | ✓ |
| THU | 22-SEP-16 | | | |
| FRI | 23-SEP-16 | | | |
| SAT | 24-SEP-16 | | | |
| SUN | 25-SEP-16 | | | |
| MON | 26-SEP-16 | | ✓ | |
| TUE | 27-SEP-16 | ✓ | | ✓ |
| WED | 28-SEP-16 | | | |
| THU | 29-SEP-16 | | | |
| FRI | 30-SEP-16 | | ✓ | |

| | |
|---|--------------------------|
| ✓ | Monitoring Day |
| | Sunday or Public Holiday |

Monitoring Location

| | | |
|--------------------|-------------|--------------|
| Air Quality | 1-hour TSP | AM1 and AM2 |
| | 24-hour TSP | AM1 and AM2a |
| Construction Noise | | NM1 and NM2 |

Impact Monitoring Schedule for next Reporting Period – October 2016

| Date | | Dust Monitoring | | Noise Monitoring |
|------|-----------|-----------------|-------------|------------------|
| | | 1-hour TSP | 24-hour TSP | |
| SAT | 1-OCT-16 | | | |
| SUN | 2-OCT-16 | | | |
| MON | 3-OCT-16 | ✓ | | ✓ |
| TUE | 4-OCT-16 | | | |
| WED | 5-OCT-16 | | | |
| THU | 6-OCT-16 | | ✓ | |
| FRI | 7-OCT-16 | ✓ | | |
| SAT | 8-OCT-16 | | | |
| SUN | 9-OCT-16 | | | |
| MON | 10-OCT-16 | | | |
| TUE | 11-OCT-16 | | | |
| WED | 12-OCT-16 | | ✓ | |
| THU | 13-OCT-16 | ✓ | | ✓ |
| FRI | 14-OCT-16 | | | |
| SAT | 15-OCT-16 | | | |
| SUN | 16-OCT-16 | | | |
| MON | 17-OCT-16 | | | |
| TUE | 18-OCT-16 | | ✓ | |
| WED | 19-OCT-16 | ✓ | | ✓ |
| THU | 20-OCT-16 | | | |
| FRI | 21-OCT-16 | | | |
| SAT | 22-OCT-16 | | | |
| SUN | 23-OCT-16 | | | |
| MON | 24-OCT-16 | | ✓ | |
| TUE | 25-OCT-16 | ✓ | | ✓ |
| WED | 26-OCT-16 | | | |
| THU | 27-OCT-16 | | | |
| FRI | 28-OCT-16 | | | |
| SAT | 29-OCT-16 | | ✓ | |
| SUN | 30-OCT-16 | | | |
| MON | 31-OCT-16 | ✓ | | ✓ |

| | |
|---|--------------------------|
| ✓ | Monitoring Day |
| | Sunday or Public Holiday |

Monitoring Location

| | | |
|--------------------|-------------|--------------|
| Air Quality | 1-hour TSP | AM1 and AM2 |
| | 24-hour TSP | AM1 and AM2a |
| Construction Noise | | NM1 and NM2 |

Appendix I

24-HOUR TSP AND CONSTRUCTION NOISE MONITORING DATA

24-Hr TSP Monitoring Data for AM1

| DATE | SAMPLE NUMBER | ELAPSED TIME | | | CHART READING | | | AVG TEMP | AVG AIR PRESS | STANDARD FLOW RATE | AIR VOLUME | FILTER WEIGHT (g) | | DUST WEIGHT COLLECTED | 24-Hr TSP (µg/m ³) |
|-----------|---------------|--------------|----------|---------|---------------|-----|------|----------|---------------|-----------------------|-----------------------|-------------------|--------|-----------------------|--------------------------------|
| | | INITIAL | FINAL | (min) | MIN | MAX | AVG | (°C) | (hPa) | (m ³ /min) | (std m ³) | INITIAL | FINAL | (g) | |
| 2-Sep-16 | 29908 | 14617.40 | 14641.41 | 1440.60 | 25 | 26 | 25.5 | 28.7 | 1002 | 0.63 | 913 | 2.8123 | 2.8382 | 0.0259 | 28 |
| 8-Sep-16 | 29920 | 14641.41 | 14665.40 | 1439.40 | 24 | 24 | 24.0 | 27.1 | 1008 | 0.57 | 824 | 2.8206 | 2.8603 | 0.0397 | 48 |
| 14-Sep-16 | 29970 | 14665.40 | 14689.40 | 1440.00 | 24 | 24 | 24.0 | 27.9 | 1008.6 | 0.57 | 823 | 2.8334 | 2.8746 | 0.0412 | 50 |
| 20-Sep-16 | 29947 | 14689.40 | 14713.40 | 1440.00 | 27 | 28 | 27.5 | 27.9 | 1008.6 | 0.73 | 1050 | 2.8328 | 2.8798 | 0.0470 | 45 |
| 26-Sep-16 | 20030 | 14713.40 | 14737.41 | 1440.60 | 27 | 29 | 28.0 | 27 | 1011 | 0.75 | 1087 | 2.7848 | 2.8167 | 0.0319 | 29 |
| 30-Sep-16 | 20031 | 14737.41 | 14761.41 | 1440.00 | 30 | 32 | 31.0 | 25.1 | 1007.7 | 0.89 | 1285 | 2.7938 | 2.9561 | 0.1623 | 126 |

24-Hr TSP Monitoring Data for AM2a

| DATE | SAMPLE NUMBER | ELAPSED TIME | | | CHART READING | | | AVG TEMP | AVG AIR PRESS | STANDARD FLOW RATE | AIR VOLUME | FILTER WEIGHT (g) | | DUST WEIGHT COLLECTED | 24-Hr TSP (µg/m ³) |
|-----------|---------------|--------------|----------|---------|---------------|-----|------|----------|---------------|-----------------------|-----------------------|-------------------|--------|-----------------------|--------------------------------|
| | | INITIAL | FINAL | (min) | MIN | MAX | AVG | (°C) | (hPa) | (m ³ /min) | (std m ³) | INITIAL | FINAL | (g) | |
| 2-Sep-16 | 29940 | 11152.31 | 11176.31 | 1440.00 | 37 | 38 | 37.5 | 28.7 | 1002.9 | 1.23 | 1765 | 2.8255 | 2.8454 | 0.0199 | 11 |
| 8-Sep-16 | 29909 | 11176.31 | 11200.31 | 1440.00 | 34 | 34 | 34.0 | 27.1 | 1008 | 1.12 | 1616 | 2.7943 | 2.8248 | 0.0305 | 19 |
| 14-Sep-16 | 29921 | 11224.31 | 11248.32 | 1440.60 | 34 | 39 | 36.5 | 27.9 | 1008.6 | 1.20 | 1728 | 2.8290 | 2.9084 | 0.0794 | 46 |
| 20-Sep-16 | 29971 | 11248.32 | 11272.32 | 1440.00 | 38 | 38 | 38.0 | 25.5 | 1012.1 | 1.25 | 1805 | 2.8390 | 2.9223 | 0.0833 | 46 |
| 26-Sep-16 | 29984 | 11272.32 | 11296.32 | 1440.00 | 35 | 40 | 37.5 | 27 | 1011 | 1.23 | 1777 | 2.8216 | 2.8878 | 0.0662 | 37 |
| 30-Sep-16 | 29994 | 11320.32 | 11344.31 | 1439.40 | 36 | 36 | 36.0 | 25.1 | 1007.7 | 1.19 | 1711 | 2.8213 | 2.9284 | 0.1071 | 63 |

Noise Measurement Results (dB) of NM1



| Date | Start Time | 1 st Leq _{5min} | L10 | L90 | 2 nd Leq _{5min} | L10 | L90 | 3 rd Leq _{5min} | L10 | L90 | 4 th Leq _{5min} | L10 | L90 | 5 th Leq _{5min} | L10 | L90 | 6 th Leq _{5min} | L10 | L90 | Leq _{30min} |
|-----------|------------|-------------------------------------|------|------|-------------------------------------|------|------|-------------------------------------|------|------|-------------------------------------|------|------|-------------------------------------|------|------|-------------------------------------|------|------|----------------------|
| 5-Sep-16 | 9:30 | 65.9 | 66.0 | 48.8 | 49.9 | 51.8 | 45.8 | 56.4 | 54.4 | 46.7 | 54.9 | 58.5 | 48.9 | 55.4 | 56.6 | 48.2 | 56.0 | 54.2 | 48.1 | 60 |
| 15-Sep-16 | 9:52 | 56.0 | 57.3 | 53.6 | 55.8 | 56.9 | 53.4 | 55.5 | 57.9 | 54.9 | 56.7 | 60.5 | 53.0 | 55.8 | 57.9 | 54.1 | 57.3 | 58.7 | 54.3 | 56 |
| 21-Sep-16 | 10:02 | 56.1 | 58.4 | 52.8 | 55.2 | 59.3 | 52.9 | 56.4 | 59.4 | 52.4 | 57.1 | 59.4 | 53.7 | 56.1 | 58.4 | 52.9 | 55.1 | 57.3 | 52.7 | 56 |
| 27-Sep-16 | 9:58 | 55.8 | 58.2 | 50.7 | 53.3 | 57.1 | 49.2 | 54.6 | 57.2 | 48.5 | 55.7 | 58.5 | 49.9 | 56.5 | 60.4 | 51.2 | 55.4 | 58.0 | 50.1 | 55 |



Noise Measurement Results (dB) of NM2



| Date | Start Time | 1 st Leq _{5min} | L10 | L90 | 2 nd Leq _{5min} | L10 | L90 | 3 rd Leq _{5min} | L10 | L90 | 4 th Leq _{5min} | L10 | L90 | 5 th Leq _{5min} | L10 | L90 | 6 th Leq _{5min} | L10 | L90 | Leq _{30min} |
|-----------|------------|-------------------------------------|------|------|-------------------------------------|------|------|-------------------------------------|------|------|-------------------------------------|------|------|-------------------------------------|------|------|-------------------------------------|------|------|----------------------|
| 5-Sep-16 | 10:45 | 63.4 | 65.1 | 40.2 | 49.4 | 52.0 | 45.1 | 47.9 | 50.0 | 45.2 | 50.5 | 53.1 | 45.8 | 49.8 | 52.6 | 46.1 | 48.2 | 51.1 | 45.8 | 56 |
| 15-Sep-16 | 13:38 | 51.4 | 54.1 | 48.1 | 50.3 | 52.8 | 46.6 | 45.6 | 48.1 | 44.4 | 46.1 | 49.9 | 44.1 | 47.3 | 50.1 | 43.6 | 49.9 | 51.7 | 45.3 | 49 |
| 21-Sep-16 | 13:52 | 49.5 | 52.6 | 45.5 | 50.2 | 53.1 | 46.1 | 48.9 | 51.2 | 45.1 | 47.9 | 49.4 | 44.6 | 49.1 | 50.4 | 43.8 | 46.9 | 48.1 | 43.5 | 49 |
| 27-Sep-16 | 13:56 | 52.0 | 54.3 | 48.7 | 50.8 | 53.3 | 47.0 | 49.2 | 51.5 | 45.9 | 46.4 | 49.5 | 44.3 | 47.9 | 50.8 | 45.2 | 48.3 | 51.1 | 46.0 | 50 |

Appendix J

GRAPHICAL PLOTS

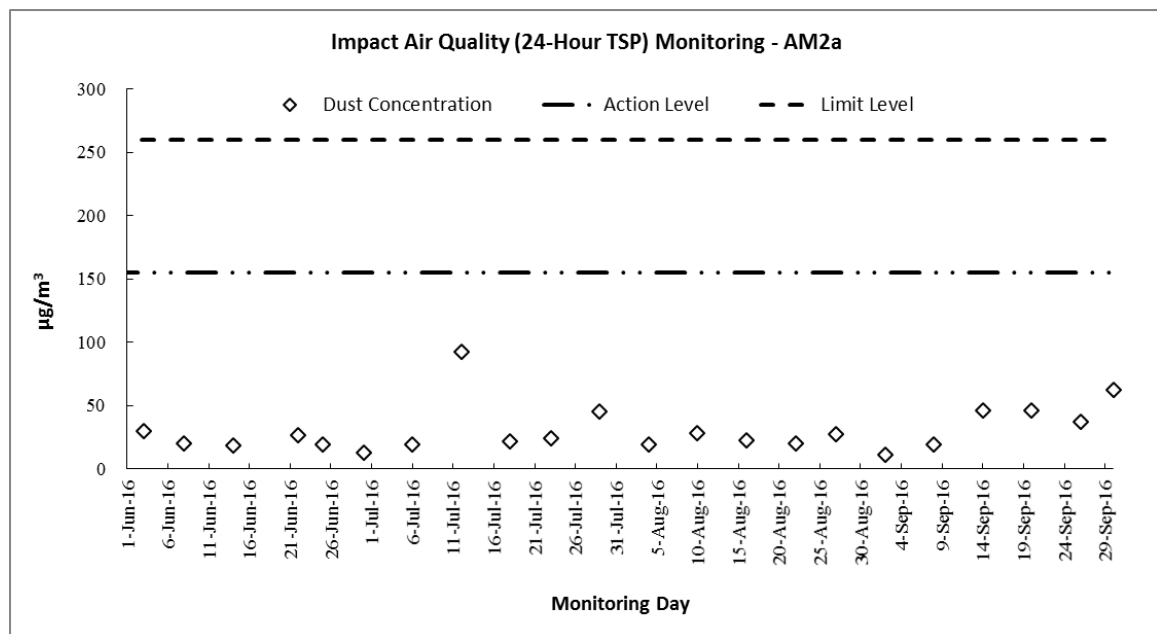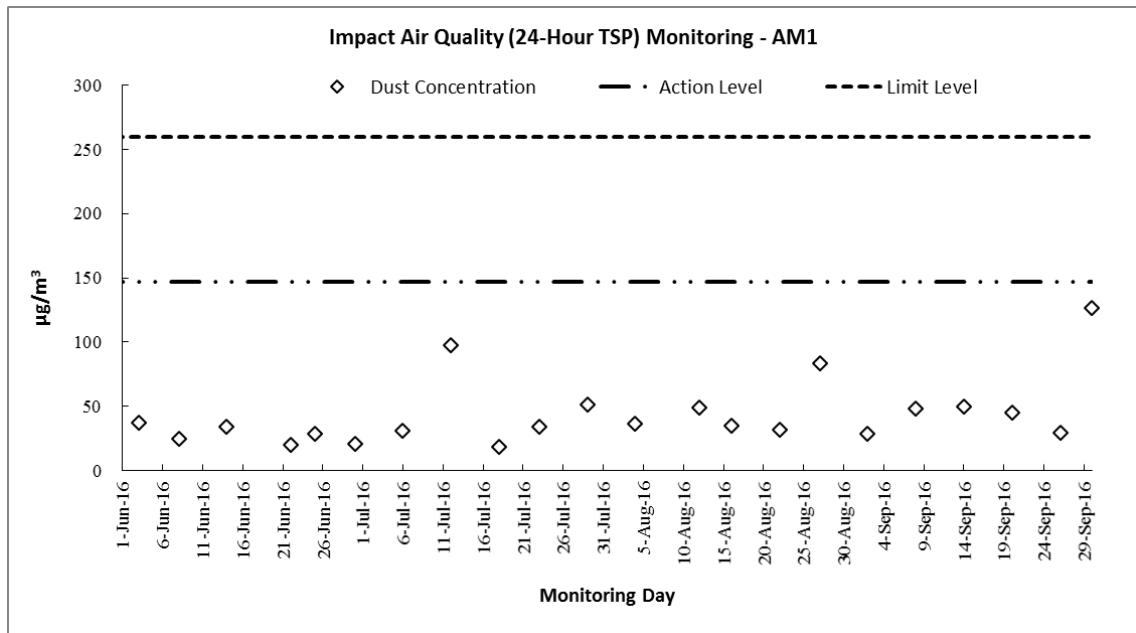Air Quality – 24-Hour TSP

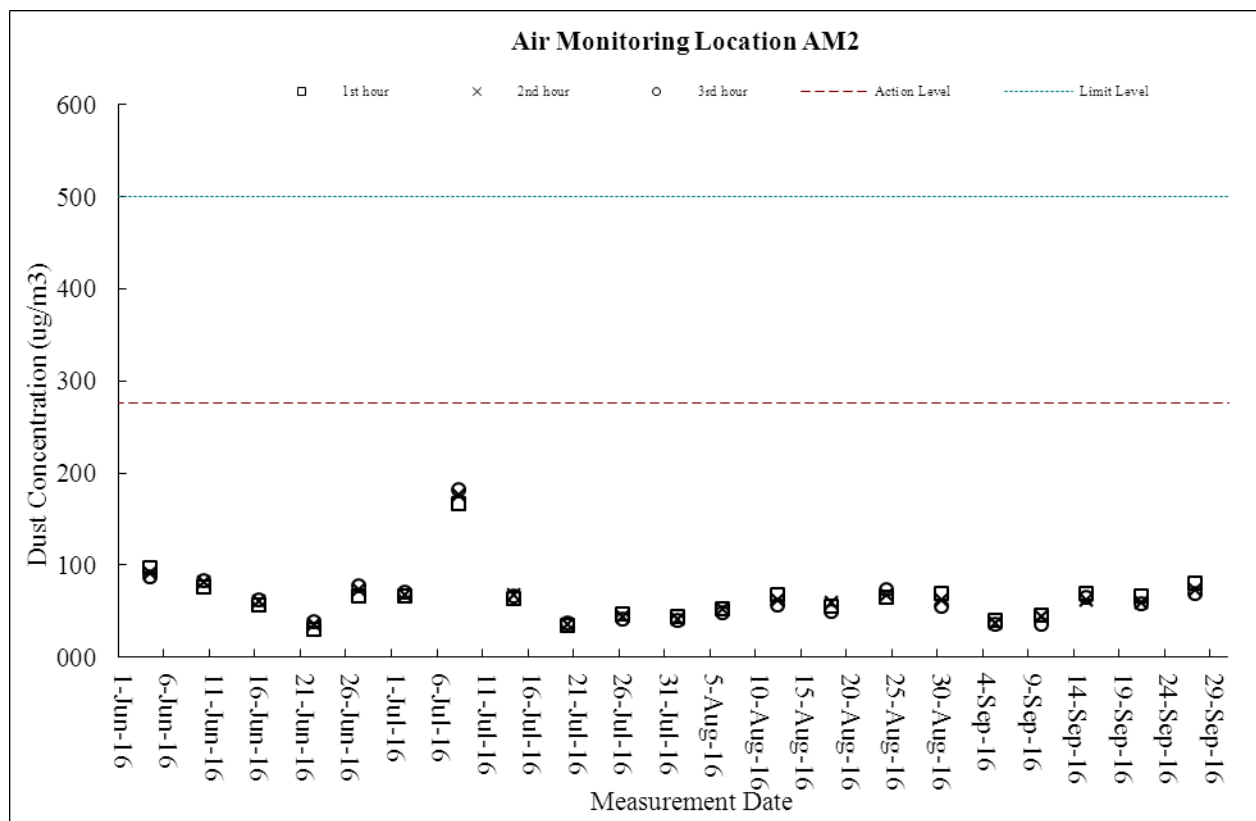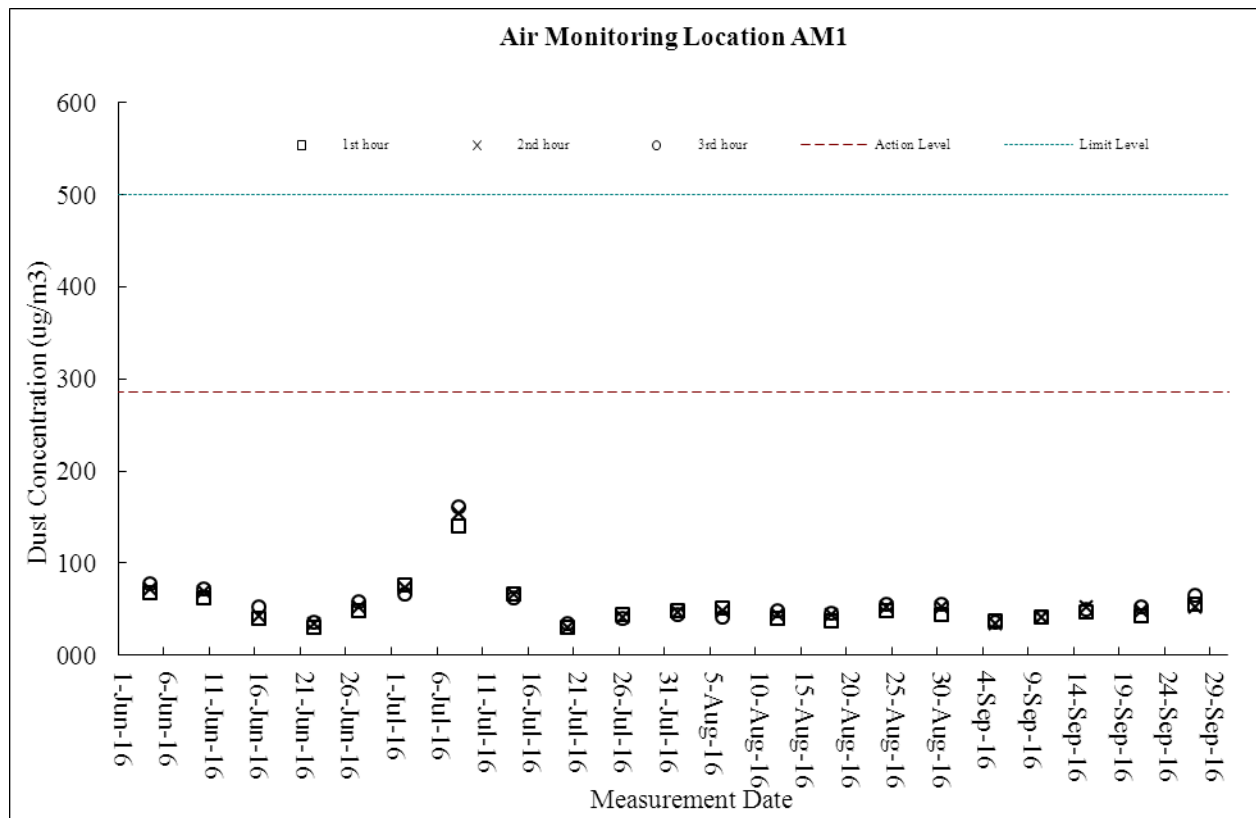Air Quality – 1-Hour TSP

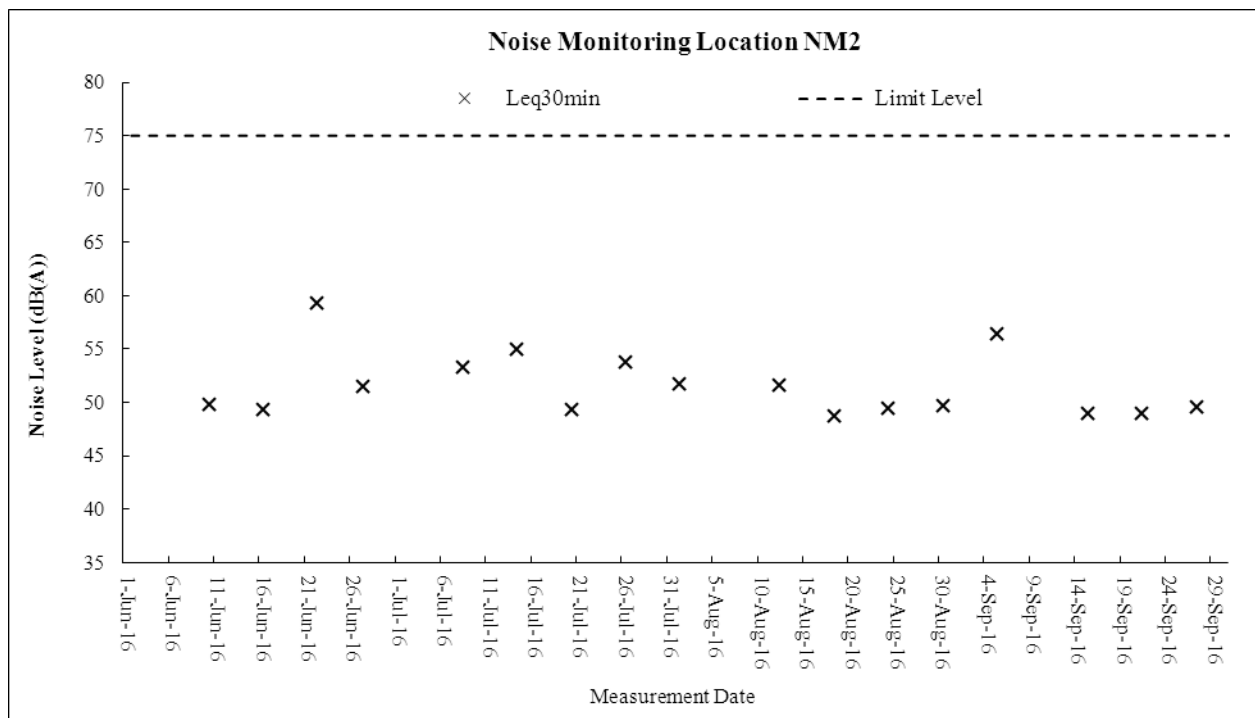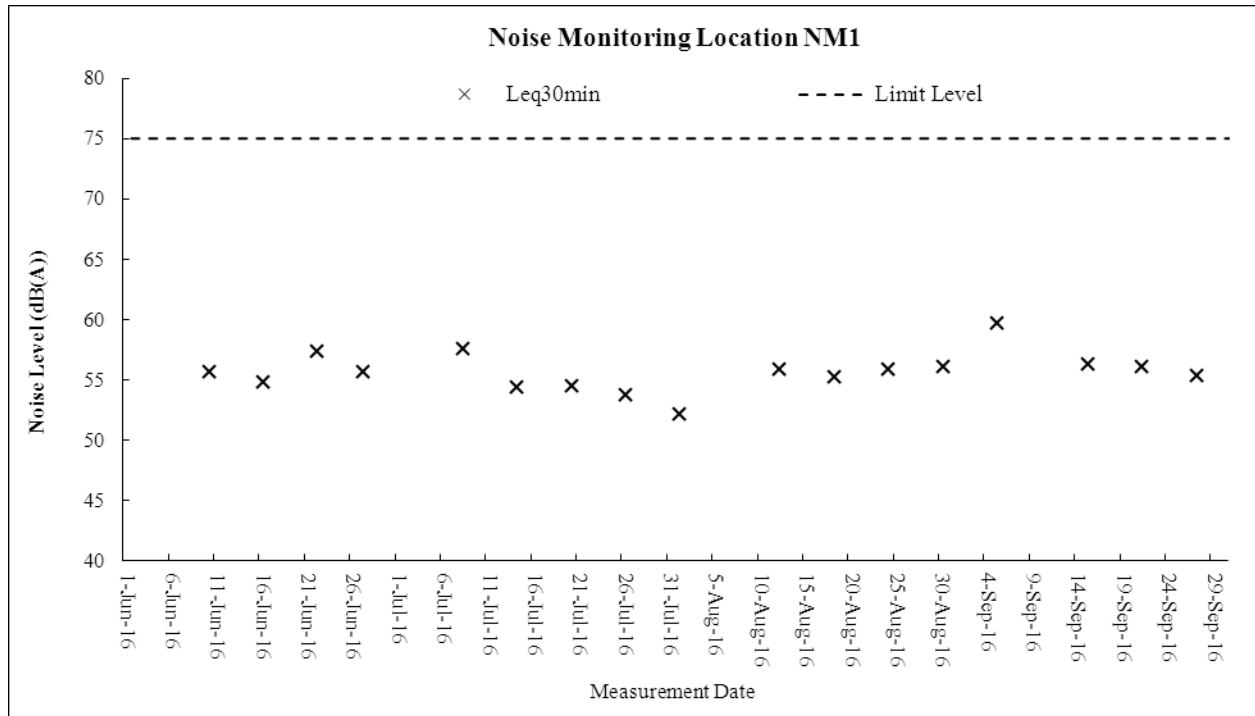Construction Noise

Appendix K

METEOROLOGICAL DATA DURING THE REPORTING MONTH (TA KWU LING STATION)

| Date | | Weather | Total Rainfall (mm) | Ta Kwu Ling Station | | | |
|-----------|-----|--------------------------------------------------------------------|---------------------|---------------------|-------------------|----------------------------|----------------|
| | | | | Mean Air Temp. (°C) | Wind Speed (km/h) | Mean Relative Humidity (%) | Wind Direction |
| 1-Sep-16 | Thu | Mainly cloudy with showers and a few squally thunderstorms. | 68.9 | 28.8 | 6.1 | 82.2 | S/SW |
| 2-Sep-16 | Fri | Cloudy with showers and isolated thunderstorms. | 6.1 | 29.7 | 9.7 | 79.2 | S/SW |
| 3-Sep-16 | Sat | Moderate easterly winds, occasionally fresh offshore. | 7 | 29 | 8.3 | 80.1 | E/NE |
| 4-Sep-16 | Sun | Showers will be heavy at first. | Trace | 28.7 | 7.6 | 78.5 | E/NE |
| 5-Sep-16 | Mon | Cloudy with showers and isolated thunderstorms. | 75.3 | 27.2 | 6.5 | 86.5 | E/NE |
| 6-Sep-16 | Tue | Cloudy with showers and isolated thunderstorms. | 10.8 | 27.6 | 4.5 | 85 | E/NE |
| 7-Sep-16 | Wed | Mainly cloudy with showers. | 20.4 | 27 | 6.4 | 86.2 | S |
| 8-Sep-16 | Thu | Mainly cloudy with a few showers. | 2.8 | 27.5 | 3.7 | 85.7 | E/SE |
| 9-Sep-16 | Fri | Mainly cloudy with showers. | 16.3 | 27.3 | 6.5 | 87.5 | S/SW |
| 10-Sep-16 | Sat | Cloudy with showers and isolated thunderstorms. | 53.2 | 26.9 | 6.8 | 83.5 | E/NE |
| 11-Sep-16 | Sun | Mainly fine and very hot. Moderate easterly winds. | 6.6 | 28 | 7 | 80.7 | E/NE |
| 12-Sep-16 | Mon | Mainly fine and very hot. Moderate easterly winds. | 0 | 28.6 | 5.5 | 75.7 | E/NE |
| 13-Sep-16 | Tue | Mainly cloudy. a few rain patches | 8.5 | 28.6 | 5.9 | 79.7 | E/NE |
| 14-Sep-16 | Wed | Moderate east to northeasterly winds, occasionally fresh offshore. | 0 | 29 | 6.5 | 73 | N/NW |
| 15-Sep-16 | Thu | Moderate easterly winds, occasionally fresh offshore. | 0.7 | 28.7 | 3.2 | 72.2 | N/NW |
| 16-Sep-16 | Fri | Moderate easterly winds, occasionally fresh offshore. | 0 | 28.2 | 4.2 | 71.5 | N/NW |
| 17-Sep-16 | Sat | Sunny intervals in the afternoon. | 0 | 28.6 | 5.3 | 70.3 | E/NE |
| 18-Sep-16 | Sun | Mainly cloudy with showers. | Trace | 28.1 | 5.5 | 69.5 | E/NE |
| 19-Sep-16 | Mon | Mainly cloudy with a few showers. | 3.8 | 28.2 | 6.3 | 72 | E/NE |
| 20-Sep-16 | Tue | Mainly cloudy. a few rain patches | 39.6 | 26.4 | 4.6 | 78.7 | N/NW |
| 21-Sep-16 | Wed | Moderate east to northeasterly winds, occasionally fresh offshore. | 2.4 | 27 | 5.5 | 77.5 | E/NE |
| 22-Sep-16 | Thu | Moderate easterly winds, occasionally fresh offshore. | 0 | 27.5 | 6.4 | 71.2 | E/NE |
| 23-Sep-16 | Fri | Moderate easterly winds, occasionally fresh offshore. | Trace | 28.3 | 8.5 | 71 | E/NE |
| 24-Sep-16 | Sat | Sunny intervals in the afternoon. | Trace | 28.6 | 6.7 | 73 | E/SE |
| 25-Sep-16 | Sun | Mainly cloudy with a few showers. | 0 | 29.5 | 4.2 | 81 | E/SE |
| 26-Sep-16 | Mon | Mainly cloudy. a few rain patches | Trace | 29.1 | 5.3 | 78.2 | S/SE |
| 27-Sep-16 | Tue | Moderate east to northeasterly winds, occasionally fresh offshore. | 0 | 30.3 | 6.5 | 68.7 | N/NW |
| 28-Sep-16 | Wed | Moderate easterly winds, occasionally fresh offshore. | 0 | 29.5 | 7 | 67 | W/NW |
| 29-Sep-16 | Thu | Moderate easterly winds, occasionally fresh offshore. | 0.7 | 25.7 | 7 | 67 | N/NW |
| 30-Sep-16 | Fri | Sunny intervals in the afternoon. | 0 | 25 | 4.7 | 76.2 | W/NW |

Appendix L

MONTHLY SUMMARY WASTE FLOW TABLE

Monthly Summary Waste Flow Table

Department: Drainage Services Department Contract No.: DC/2013/09
 Contract Title: Advance Works for Shek Wu Hui Sewage Treatment Works - Further Expansion Phase 1A and Sewerage Works at Ping Che Road
 Commencement Date: 21-Jul-2015 Estimated completion Date: 19-Aug-2016 Estimated Contract Sum: 1.56M

| Month | Actual Quantities of Inert C&D Materials Generated Monthly | | | | | | Actual Quantities of C&D Wastes Generated Monthly | | | | |
|------------------|------------------------------------------------------------|-------------------------------------|--------------------------|--------------------------|--------------------------|--------------------------|---------------------------------------------------|----------------------------|-----------------------|----------------|-----------------------------|
| | Total Quantity Generated | Hard Rock and Large Broken Concrete | Reused in the Contract | Reused in other Projects | Disposed as Public Fill | Imported Fill | Metals | Paper/ cardboard packaging | Plastics (see Note 3) | Chemical Waste | Others, e.g. general refuse |
| | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000 kg) | (in '000kg) | (in '000kg) | (in '000kg) | (in '000m ³) |
| Jan | 0.335 | 0.111 | 0.060 | 0.000 | 0.164 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 |
| Feb | 2.377 | 0.089 | 0.050 | 2.228 | 0.010 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.008 |
| Mar | 0.141 | 0.015 | 0.050 | 0.000 | 0.076 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.007 |
| Apr | 0.160 | 0.010 | 0.050 | 0.000 | 0.100 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.023 |
| May | 0.334 | 0.000 | 0.010 | 0.000 | 0.324 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.026 |
| June | 2.517 | 0.024 | 0.300 | 0.000 | 2.193 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.013 |
| Sub-total | 5.863 | 0.249 | 0.520 | 2.228 | 2.866 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.076 |
| July | 3.284 | 0.000 | 0.150 | 0.000 | 3.134 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.002 |
| Aug | 0.396 | 0.005 | 0.100 | 0.000 | 0.291 | 0.000 | 4.720 | 0.000 | 0.000 | 0.000 | 0.012 |
| Sep | 0.529 | 0.000 | 0.100 | 0.000 | 0.429 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.008 |
| Oct | | | | | | | | | | | |
| Nov | | | | | | | | | | | |
| Dec | | | | | | | | | | | |
| Total | 10.072 | 0.254 | 0.870 | 2.228 | 6.720 | 0.000 | 4.720 | 0.000 | 0.000 | 0.000 | 0.098 |

- Notes:
- (1) The waste flow table should cover the whole construction period of the Contract.
 - (2) The original estimates of the C&D materials should be the estimates at contract commencement and should not be altered during construction.
 - (3) Inert C&D materials that are specified in the Contract to be imported for use at the Site shall be separately indicated.
 - (4) The yearly estimates of the C&D materials should be updated as appropriate taking into account the latest works programme etc.
 - (5) Plastics refer to plastic bottles/containers, plastic sheets/foam from packaging material.

Appendix M

IMPLEMENTATION SCHEDULE FOR ENVIRONMENTAL MITIGATION MEASURES (ISEMM)

| EM&A Ref. | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concern to Address | Who to implement the measures? | Location of the measure | When to implement the measures? | What requirements or standards for the measure to achieve |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|--------------------------------|-------------------------|----------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| Air Quality Impact | | | | | | |
| S2.4.1.3 | <p>Dust suppression measures stipulated in the Air Pollution Control (Construction Dust) Regulation and good site practices:</p> <ul style="list-style-type: none"> Any excavated or stockpile of dusty material should be covered entirely by impervious sheeting or sprayed with water to maintain the entire surface wet and then removed or backfilled or reinstated where practicable within 24 hours of the excavation or unloading; Any dusty material remaining after a stockpile is removed should be wetted with water and cleared from the surface of roads; A stockpile of dusty material should not be extended beyond the pedestrian barriers, fencing or traffic cones; The load of dusty materials on a vehicle leaving a construction site should be covered entirely by impervious sheeting to ensure that the dusty materials do not leak from the vehicle; Where practicable, vehicle washing facilities with high pressure water jet should be provided at every discernible or designated vehicle exit point. The area where vehicle washing takes place and the road section between the washing facilities and the exit point should be paved with concrete, bituminous materials or hardcores; When there are open excavation and reinstatement works, hoarding of not less than 2.4m high should be provided as far as practicable along the site boundary with provision for public crossing. Good site practice shall also be adopted by the Contractor to ensure the conditions of the hoardings are properly maintained throughout the construction period. The portion of any road leading only to construction site that is within 30m of a vehicle entrance or exit should be kept clear of dusty materials; Surfaces where any pneumatic or power-driven drilling, cutting, polishing or other mechanical breaking operation takes place should be sprayed with water or a dust suppression chemical continuously; Any area that involves demolition activities should be sprayed with water or a dust suppression chemical immediately prior to, during and immediately after the activities so as to maintain the entire surface wet; | To minimize the dust impact | Contractor | Work Sites | Construction phase of Advance Works and Main Works of Phase 1A | Air Pollution Control Ordinance (APCO) and Air Pollution Control (Construction Dust) Regulation |

| EM&A Ref. | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concern to Address | Who to implement the measures? | Location of the measure | When to implement the measures? | What requirements or standards for the measure to achieve |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|--------------------------------|-------------------------|---------------------------------|-----------------------------------------------------------|
| Air Quality Impact | | | | | | |
| | <ul style="list-style-type: none"> Where a scaffolding is erected around the perimeter of a building under construction, effective dust screens, sheeting or netting should be provided to enclose the scaffolding from the ground floor level of the building, or a canopy should be provided from the first floor level up to the highest level of the scaffolding; Any skip hoist for material transport should be totally enclosed by impervious sheeting; Every stock of more than 20 bags of cement or dry pulverized fuel ash (PFA) should be covered entirely by impervious sheeting or placed in an area sheltered on the top and the 3 sides; Cement or dry PFA delivered in bulk should be stored in a closed silo fitted with an audible high level alarm which is interlocked with the material filling line and no overfilling is allowed; Loading, unloading, transfer, handling or storage of bulk cement or dry PFA should be carried out in a totally enclosed system or facility, and any vent or exhaust should be fitted with an effective fabric filter or equivalent air pollution control system; and Exposed earth should be properly treated by compaction, turfing, hydroseeding, vegetation planting or sealing with latex, vinyl, bitumen, shortcrete or other suitable surface stabilizer within six months after the last construction activity on the construction site or part of the construction site where the exposed earth lies. | | | | | |

| EM&A Ref. | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concern to Address | Who to implement the measures? | Location of the measure | When to implement the measures? | What requirements or standards for the measure to achieve |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|--------------------------------|-------------------------|-----------------------------------------------------------------|-----------------------------------------------------------|
| Noise Impact | | | | | | |
| S3.4.1.1 | Use of movable barrier, enclosure, acoustic mat and quiet plant. Use of wooden frames barrier with a small-cantilevered upper portion of superficial density not less than 14kg/m ² on a skid footing with 25mm thick internal sound absorptive lining. | To minimize construction noise impact arising from the Project at the affected noise sensitive receivers (NSRs) | Contractor | Work Sites | Construction phase of Advance Works and Main Works of Phase 1A | EIAO-TM, Noise Control Ordinance (NCO) |
| S3.4.1.2 | <p>Good Site Practice:</p> <ul style="list-style-type: none"> • Only well-maintained plant should be operated on-site and plant should be serviced regularly during the construction program. • Silencers or mufflers on construction equipment should be utilized and should be properly maintained during the construction program. • Mobile plant, if any, should be sited as far away from NSRs as possible. • Machines and plant (such as trucks) that may be in intermittent use should be shut down between works periods or should be throttled down to a minimum. • Plant known to emit noise strongly in one direction should, wherever possible, be orientated so that the noise is directed away from the nearby NSRs. • Material stockpiles and other structures should be effectively utilized, wherever practicable, in screening noise from on-site construction activities. | To minimize construction noise impact arising from the Project at the affected NSRs | Contractor | Work Sites | Construction period of Advance Works and Main Works of Phase 1A | EIAO-TM, NCO |

| EM&A Ref. | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concern to Address | Who to implement the measures? | Location of the measure | When to implement the measures? | What requirements or standards for the measure to achieve |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|------------------------------------|-------------------------|----------------------------------------------------------------|-----------------------------------------------------------|
| Ecological Impact | | | | | | |
| S4.2.1.1 | Solid dull green noise/visual barriers of at least 2m high shall be erected and maintained between active works area and all areas of ecological importance. | Minimize noise and human disturbances during construction phase. | Contractor | Work Sites | Construction phase of Advance Works and Main Works of Phase 1A | EIAO-TM |
| S4.2.1.2 | Avoid unnecessary lighting. | Minimize mortality impacts on birds. | Design Contractor / Plant Operator | Work Sites | Construction phase of Advance Works and Main Works of Phase 1A | EIAO-TM |
| S4.2.1.3 | Good construction site practice to minimise dust generation should be followed on all construction sites. Measures to avoid, minimise and mitigate impacts on air quality are detailed in this schedule | Minimize dust generation from construction sites. | Contractor | Work Sites | Construction phase of Advance Works and Main Works of Phase 1A | EIAO-TM |
| S4.2.1.4 | <p>The following measures to avoid, minimise and mitigate impact on water quality during construction phase shall be implemented</p> <ul style="list-style-type: none"> • Temporary sewerage and drainage to be designed and installed to collect wastewater and prevent it from entering water bodies; • Proper locations well away from nearby water bodies should be used for temporary storage of materials (i.e. equipment, filling materials, chemicals and fuel) and temporary stockpiles of construction debris and spoil, and these should be identified before commencement of works; • To prevent muddy water entering nearby water bodies, work sites close to nearby water bodies should be isolated, using such items as sandbags or silt curtains with lead edge at bottom and properly supported props. Other protective measures should also be taken to ensure that no pollution or siltation occurs to the water gathering grounds of the work sites; • Construction debris and spoil should be covered and/or properly disposed of as soon as possible to avoid these being washed into nearby water bodies; • Proper locations for discharge outlets of temporary wastewater treatment facilities well away from sensitive receivers should be identified; | Avoid, minimise and mitigate impact on water quality | Contractor | Work Sites | Construction phase of Advance Works and Main Works of Phase 1A | EIAO-TM |

| EM&A Ref. | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concern to Address | Who to implement the measures? | Location of the measure | When to implement the measures? | What requirements or standards for the measure to achieve |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|--------------------------------|-------------------------|---------------------------------|-----------------------------------------------------------|
| Ecological Impact | | | | | | |
| | <ul style="list-style-type: none"> • Adequate lateral support should be erected where necessary in order to prevent soil/mud from slipping into water bodies; • Site boundaries should be clearly marked and any works beyond the boundary strictly prohibited; • Regular water monitoring and site audit should be carried out at adequate points along any watercourses where construction works are underway upstream within their catchments and also on the Ng Tung, Sheung Yue and Shek Sheung Rivers. If the monitoring and audit results show that pollution occurs, adequate measures including temporarily cessation of works should be considered; • Excavation profiles should be properly designed and executed with attention to the relevant requirements for environment, health and safety; • Where soil to be excavated is situated beneath the groundwater table, it may be necessary to lower the groundwater table by installing well points or similar means; • Stockpiling sites should be lined with impermeable sheeting and bunded. Stockpiles should be properly covered by impermeable sheeting to reduce dust emission during dry season or contaminated run-off during rainy season. Watering should be avoided on stockpiles of contaminated soil to minimize contaminated runoff and construction materials should be properly covered and located away from nearby water bodies; and • Supply of suitable clean backfill material after excavation, if required. • Vehicles containing any excavated materials should be suitably covered to limit potential dust emissions or contaminated run-off, and truck bodies and tailgates should be sealed to prevent discharge during transport or during wet season; • Speed control for the trucks carrying contaminated materials should be enforced; • Vehicle wheel washing facilities at construction sites' exit points should be established and used, where necessary; and • Other measures as detailed in this schedule. | | | | | |

| EM&A Ref. | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concern to Address | Who to implement the measures? | Location of the measure | When to implement the measures? | What requirements or standards for the measure to achieve |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|--------------------------------|-------------------------|----------------------------------------------------------------|-----------------------------------------------------------|
| Water Quality Impact | | | | | | |
| S5.2.2.1 | Construction Site Runoff Practices and measures provided in the Practice Note for Professional Persons on Construction Site Drainage, (PROPECC PN1/94) should be followed where applicable. | Control construction runoff | Contractors | Work Sites | Construction phase of Advance Works and Main Works of Phase 1A | EIAO-TM, WPCO, EIAO |
| S5.2.2.2 – S5.2.2.3 | <p>Sewage from Workforce</p> <ul style="list-style-type: none"> • Portable chemical toilets and sewage holding tanks should be provided for handling the construction sewage generated by the workforce. A licensed Contractor should be employed to provide appropriate and adequate portable toilets and be responsible for appropriate disposal and maintenance. • Notices should be posted at conspicuous locations to remind the workers not to discharge any sewage or wastewater into the nearby environment during the construction phase of the Project. Regular environmental audit on construction site should be conducted in order to provide an effective control of any malpractices and achieve continual improvement of environmental performance on site. It is anticipated that sewage generation during the construction phase of the Project would not cause water quality impact after undertaking all required measures | Handling of site sewage | Contractors | Work Sites | Construction phase of Advance Works and Main Works of Phase 1A | EIAO-TM, WPCO, EIAO |

| EM&A Ref. | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concern to Address | Who to implement the measures? | Location of the measure | When to implement the measures? | What requirements or standards for the measure to achieve |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|--------------------------------|-------------------------|---------------------------------------------------------------------------------------|-----------------------------------------------------------|
| Waste Management | | | | | | |
| S6.2.2.1 | <p>Good Site Practices and Waste Reduction Measures:</p> <ul style="list-style-type: none"> Nomination of an approved person, such as a site manager, to be responsible for the implementation of good site practices, arrangements for collection and effective disposal to an appropriate facility, of all wastes generated at the site; Training of site personnel in site cleanliness, appropriate waste management procedures and concepts of waste reduction, reuse and recycling; Provision of sufficient waste disposal points and regular collection for disposal; Appropriate measures to minimise windblown litter and dust during transportation of waste by either covering trucks or by transporting wastes in enclosed containers; Regular cleaning and maintenance programme for drainage systems, sumps and oil interceptors; An Environmental Management Plan (EMP) should be prepared by the contractor and submitted to the Engineer for approval. | Minimize waste generation during construction | Contractor | Work Sites | Construction phase of Advance Works and Main Works of Phase 1A | Waste Disposal Ordinance (WDO) |
| S6.2.3.1 | <p>Waste Reduction Measures:</p> <ul style="list-style-type: none"> Segregate and store different types of waste in different containers, skip or stockpiles to enhance reuse or recycling of materials and their proper disposal; Proper storage and site practices to minimize the potential for damage and contamination of construction materials; Plan and stock construction materials carefully to minimize amount of waste generated and avoid unnecessary generation of waste; Sort out demolition debris and excavated materials from demolition works to recover reusable/recyclable portions (i.e. soil, broken concrete, metal etc.); and Provide training to workers on the importance of appropriate waste management procedures, including waste reduction, reuse and recycling. | Reduce waste generation | Contractor | Work Sites | Prior to the commencement of construction of Advance Works and Main Works of Phase 1A | WDO |
| S6.2.4.1 - S6.2.4.2 | <p>Storage, Collection and Transportation of Waste Should any temporary storage or stockpiling of waste is required, recommendations to minimize the impacts include:</p> <ul style="list-style-type: none"> Waste, such as soil, should be handled and stored well to ensure secure | Minimize waste impacts arising from waste storage | Contractor | Work Sites | Construction phase of Advance Works and Main Works of Phase 1A | WDO |

| EM&A Ref. | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concern to Address | Who to implement the measures? | Location of the measure | When to implement the measures? | What requirements or standards for the measure to achieve |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|--------------------------------|-------------------------|----------------------------------------------------------------|----------------------------------------------------------------------|
| Waste Management | | | | | | |
| | <ul style="list-style-type: none"> containment, thus minimizing the potential of pollution; Stockpiling area should be provided with covers and water spraying system to prevent materials from wind-blown or being washed away; and Different locations should be designated to stockpile each material to enhance reuse. Remove waste in timely manner; Employ the trucks with cover or enclosed containers for waste transportation; Obtain relevant waste disposal permits from the appropriate authorities; and Disposal of waste should be done at licensed waste disposal facilities. | | | | | |
| S6.2.5.2 | C&D Materials from Site Formation <ul style="list-style-type: none"> Maintain temporary stockpiles and reuse excavated fill material for backfilling; Carry out on-site sorting; Make provisions in the Contract documents to allow and promote the use of recycled aggregates where appropriate; Adopt “selective demolition” technique to demolish the existing structure and facilities with a view to recovering broken concrete effectively for recycling purpose, where possible; and Implement a trip-ticket system for each works contract to ensure that the disposal of C&D materials are properly documented and verified. | Minimize waste impacts from excavated and C&D materials | Contractor | Work Sites | Construction phase of Advance Works and Main Works of Phase 1A | Land (Miscellaneous Provisions) Ordinance, WDO, ETWB TCW No. 19/2005 |
| S6.2.5.3 | C&D Material from Buildings Demolition and New Building Construction <ul style="list-style-type: none"> The Contractor should recycle as much as possible of the C&DM on-site. Public fill and C&DM waste should be segregated and stored in different containers or skips to enhance reuse or recycling of materials and their proper disposal. For example, concrete and masonry can be crushed and used as fill, and steel reinforcing bar can be used by scrap steel mills. Different areas of the work sites should be designated for such segregation and storage. The use of wooden hoardings shall not be allowed. An alternative material, such as metal, aluminium or alloy etc, could be used. Government has developed a charging policy for the disposal of waste to landfill at present. It will provide additional incentive to reduce the volume of generated waste and ensure proper segregation to allow | Minimize waste impacts from building demolition and new building construction | Contractor | Work Sites | Construction phase of Advance Works and Main Works of Phase 1A | Land (Miscellaneous Provisions) Ordinance, WDO, ETWB TCW No. 19/2005 |

| EM&A Ref. | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concern to Address | Who to implement the measures? | Location of the measure | When to implement the measures? | What requirements or standards for the measure to achieve |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|--------------------------------|-------------------------|----------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| Waste Management | | | | | | |
| | <p>reuse of the inert material on site when implemented.</p> <ul style="list-style-type: none"> In order to minimize the impacts of the demolition works, the generated wastes must be cleared as quickly as possible after demolition. Therefore, the demolition and clearance works should be undertaken simultaneously. To facilitate proper segregation of inert and non-inert C&D material arising from demolition works, selective demolition method should be adopted. | | | | | |
| S6.2.5.4 | <p>Chemical Waste</p> <ul style="list-style-type: none"> If chemical wastes are produced at the construction site, the Contractors should register with EPD as chemical waste producers. Chemical wastes should be stored in appropriate containers and collected by a licensed chemical waste contractor. Chemical wastes (e.g. spent lubricant oil) should be recycled at an appropriate facility as far as possible, while the chemical waste that cannot be recycled should be disposed of at either the Chemical Waste Treatment Centre, or another licensed facility, in accordance with the Waste Disposal (Chemical Waste) (General) Regulation | Control the chemical waste and ensure proper storage, handling and disposal | Contractor | Work Sites | Construction phase of Advance Works and Main Works of Phase 1A | Waste Disposal (Chemical Waste General) Regulation, Code of Practice on the Packaging, Labelling and Storage of Chemical Waste |
| S6.2.5.5 | <p>General Refuse</p> <ul style="list-style-type: none"> General refuse should be stored in enclosed bins separately from construction and chemical wastes. Recycling bins should also be placed to encourage recycling. Preferably enclosed and covered areas should be provided for general refuse collection and routine cleaning for these areas should also be implemented to keep areas clean. A reputable waste collector should be employed to remove general refuse on a daily basis. | Minimize production of the general refuse and avoid odour, pest and litter impacts | Contractor | Work Sites | Construction phase of Advance Works and Main Works of Phase 1A | Waste Disposal (Chemical Waste General) Regulation, Code of Practice on the Packaging, Labelling and Storage of Chemical Waste |

| EM&A Ref. | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concern to Address | Who to implement the measures? | Location of the measure | When to implement the measures? | What requirements or standards for the measure to achieve |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|--------------------------------|-----------------------------------------------------------------|---------------------------------------------------------------|-----------------------------------------------------------|
| Landscape and Visual | | | | | | |
| S7.3.1.1 | Good Site Practices <ul style="list-style-type: none"> For areas unavoidably disturbed by the Project on a short term basis e.g. works areas, the general principle to try and restore these to their former state to suit future land use, should be adhered to. With regard to topsoil, where identified, it should be stripped, treated appropriately, and where suitable and practical stored for re-use in the construction of the soft landscape works such as roadside amenity strips, and open space sites. | Minimize the impact to the landscape and visual | Contractor | Work Sites | Prior to construction and construction phase | |
| S7.3.2.1 | MM4 - Tree Protection & Preservation <ul style="list-style-type: none"> Existing trees to be retained within the Project Site should be carefully protected during construction. In particular Old and Valuable Trees (OVTs) will be preserved according to ETWB TC (Works) No. 29/2004. Detailed Tree Protection Specification shall be provided in the Contract Specification. Under this specification, the Contractor shall be required to submit, for approval, a detailed working method statement for the protection of trees prior to undertaking any works adjacent to all retained trees, including trees in Contractor's works areas. A detailed tree survey will be carried out for the Tree Removal Application (TRA) process which will be carried out at the later detailed design stage of the Project. The detailed tree survey will propose which trees should be retained, transplanted or felled and will include details of tree protection measures for those trees to be retained. | Protect and Preserve Trees | Designer / Contractor | Work Sites | Prior to construction and construction phase | ETWB TCW No. 10/2013, 29/2004 and 3/2006 |
| S7.3.2.1 | MM5 - Tree Transplantation <ul style="list-style-type: none"> Trees unavoidably affected by the Project works should be transplanted where practical. Trees should be transplanted straight to their final receptor site and not held in a temporary nursery as far as possible. A detailed Tree Transplanting Specification shall be provided in the Contract Specification, where applicable. Sufficient time for necessary tree root and crown preparation periods shall be allowed in the project programme. A detailed transplanting proposal will be submitted to relevant government departments for approval in accordance with ETWBTC 2/2004 and 3/2006 and final | Transplant Trees where suitable for transplantation | Designer / Contractor | Work Sites where possible. Otherwise consider offsite locations | Prior to construction, construction phase and operation phase | WB TCW No. 10/2013, 3/2006 and 2/2004 |

| EM&A Ref. | Recommended Mitigation Measures | Objectives of the Recommended Measures & Main Concern to Address | Who to implement the measures? | Location of the measure | When to implement the measures? | What requirements or standards for the measure to achieve |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|--------------------------------|-----------------------------|----------------------------------------|-----------------------------------------------------------|
| Landscape and Visual | | | | | | |
| | locations of transplanted trees should be agreed prior to commencement of the work. | | | | | |
| S7.3.2.1 | MM17 - Light Control <ul style="list-style-type: none"> Construction day and night time lighting should be controlled to minimize glare impact to adjacent VSRs during the Construction phase. Street and night time lighting shall also be controlled to minimize glare impact to adjacent VSRs during the operation phase. | To minimize glare impact to adjacent VSRs. | Designer / Contractor | Work Sites and/or the Plant | Construction phase and operation phase | |