環境保護署

Contract No. EP/SP/66/12 Integrated Waste Management Facilities, Phase 1 Monthly EM&A Report No.50



吉寶西格斯-振華聯營公司 KEPPEL SEGHERS - ZHEN HUA JOINT VENTURE

# Monthly EM&A Report No.50 (Period from 1 August to 31 August 2022)

(Clause 3.3, Further Environmental Permit FEP-01/429/2012/A)

KSZHJV	/	312	/	Monthly EM&A	/	0050	/	Α
Issuer		Project Code		Type of Document		Sequential No.		Revision
								Index

# **Document No.**

	Prepared by:	Certified by:	Verified by:
Name	Joe Ho	F.C. Tsang	Mandy To
Position	Environmental Team	Environmental Team Leader	Independent Environmental Checker
Signature	J.	Act Bosp	Mandejz.
Date:	14 September 2022	14 September 2022	14 September 2022

© This document contains confidential and proprietary information belonging to Keppel Seghers - Zhen Hua Joint Venture and/or its affiliates. The contents of this document shall not be used for any other purpose than that for which they were provided. Any disclosure, copying, distribution or the taking of any action in reliance on the contents of this document is strictly prohibited. This document confers upon the recipient no right or license of whatsoever nature based on the information as described herein. If you have received this document in error, please immediately arrange for the return to Keppel Seghers - Zhen Hua Joint Venture or destruction of this document.

# **Revision History**

Rev.	<b>DESCRIPTION OF MODIFICATION</b>	DATE
А	First Submission	14 September 2022

# CONTENTS

1.	Basic Project Information	7
2.	Marine Water Quality Monitoring	. 17
3.	Noise Monitoring	. 28
4.	Waste	. 35
5.	Coral	. 37
6.	Marine Mammal	. 43
7.	White-Bellied Sea Eagle	. 56
	Summary of Monitoring Exceedance, Complaints, Notification of mons and Prosecutions	. 60
9.	EM&A Site Inspection	. 64
10.	Future Key Issues	. 66
11.	Conclusion and Recommendations	. 67

Appendix A	Master Programme
Appendix B	Summary of Implementation Status of Environmental Mitigation
Appendix C	Impact Monitoring Schedule of the Reporting Month
Appendix D	Water Quality Monitoring Data
Appendix E	HOKLAS Laboratory Certificate
Appendix F	Water Quality Equipment Calibration Certificate
Appendix G	Event/ Action Plan for Water Quality Exceedance
Appendix H	Noise Monitoring Equipment Calibration Certificate
Appendix I	Event/Action Plan for Noise Exceedance
Appendix J	Noise Monitoring Data
Appendix K	Waste Flow Table
Appendix L	Event/Action Plan for Coral Monitoring
Appendix M	Event/Action Plan for White-bellied Sea Eagle Monitoring
Appendix N	Exceedance Report
Appendix O	Complaint Log
Appendix P	Impact Monitoring Schedule of Next Reporting Month

# **EXECUTIVE SUMMARY**

# **Introduction**

- A1. The Project, Integrated Waste Management Facility (IWMF), is a Designated Project under the Environmental Impact Assessment Ordinance (Cap. 499) (EIAO) and is currently governed by a Further Environmental Permit (FEP No. FEP-01/429/2012/A) for the construction and operation of the Project.
- A2. In accordance with the Updated Environmental Monitoring and Audit (EM&A) Manual for the Project, EM&A works for marine water quality, noise, waste management and ecology should be carried out by Environmental Team (ET), Acuity Sustainability Consulting Limited (ASCL), during the construction phase of the Project.
- A3. This is the 50<sup>th</sup> Monthly EM&A Report, prepared by ASCL, for the Project summarizing the monitoring results and audit findings of the EM&A programme at and around Shek Kwu Chau (SKC) during the reporting period from 1 August to 31 August 2022.

## Summary of Main Works Undertaken & Key Mitigation Measures Implemented

- A4. Key activities carried out in this reporting period for the Project included the following:
  - Reclamation Area:
    - Reclamation works
    - Installation of Instrumentation
    - Site Investigation works for foundation
    - Foundation works (including Driven H Pile, Socketed H Pile and Bored Pile)
    - Pile cap construction
    - Structural steel work
  - Seawall Portion:
    - Installation of Chinese Pod
    - Caisson extension works, from +3mPD to +6mPD, at Seawall A and B
    - Construction of wave wall along the vertical seawall
- A5. The major environmental impacts brought by the above construction activities include:
  - Deterioration of water quality of nearby water body by reclamation
- A6. The key environmental mitigation measures implemented for the Project in this reporting period associated with the construction activities include:
  - Reduction of noise from equipment and machinery on-site;
  - Sorting, recycling, storage and disposal of general refuse and construction waste;
  - Management of chemicals and avoidance of oil spillage on-site;

- Confirmation of the absence of silt content in the rock filling material and the filling work is properly conducted;
- Dust suppression measures for exposed earth surface and stockpile of dusty material; and
- Site runoff control measure during rainstorm.

# Summary of Exceedance & Investigation & Follow-up

- A7. The EM&A works for water quality, construction waste, marine mammal and White-Bellied Sea Eagle (WBSE) were conducted during the reporting period in accordance with the Updated EM&A Manual.
- A8. No exceedance of the Action or Limit Levels in relation to noise, construction waste and WBSE was recorded in the reporting month.
- A9. The scheduled noise monitoring on 12&13 August 2022 was cancelled due to the due to the emergency operation of Shek Kwu Chau Treatment and Rehabilitation Centre.
- A10. During the reporting period, one (1) of the general water quality monitoring results of suspended solids (SS) obtained had exceeded Action Level. Three (3) of general water quality monitoring results of SS obtained during the reporting period had exceeded the Limit Level. Investigations were carried out for each exceedance during the reporting period. No project-related Action Level & Limit Level exceedance was recorded from 1 August 2022 to 31 August 2022. The scheduled water quality monitoring event on 10 August 2022 was cancelled due to adverse weather under tropical storm Mulan. A supplementary water quality monitoring event for flood tide on 24 August 2022 was cancelled due to adverse tropical storm Ma-on.
- A11. Weekly site inspections of the construction work by ET were carried out on 2, 9, 15, 23, 30 August 2022 to audit the mitigation measures implementation status. Monthly joint site inspection was carried out on 23 August 2022 by ET and IEC. Observations were recorded in the site inspection checklists and provided to the contractors together with the appropriate follow-up actions where necessary.

#### **Complaint Handling and Prosecution**

- A12. No project-related environmental complaint was received during the reporting period.
- A13. Neither notifications of summons nor prosecution was received for the Project.

# **Reporting Change**

A14. There was no change to be reported that may affect the on-going EM&A programme.

#### Summary of Upcoming Key Issues and Key Mitigation Measures

A15. Key activities anticipated in the next reporting period for the Project will include the following:

- Reclamation Area:
  - Reclamation works
  - Installation of Instrumentation
  - Site Investigation works for foundation
  - Foundation works (including Driven H Pile and Socketed H Pile)
  - Pile cap construction
  - Structural steel work
- Seawall Portion:
  - Installation of Chinese Pod
  - Caisson extension works, from +3mPD to +6mPD, at Seawall A and B
  - Construction of wave wall along the vertical seawall
- A16. The major environmental impacts brought by the above construction activities will include:
  - Deterioration of water quality of nearby water body by reclamation.
- A17. The key environmental mitigation measures for the Project in the coming reporting period associated with the construction activities will include:
  - Reduction of noise from equipment and machinery on-site;
  - Sorting, recycling, storage and disposal of general refuse and construction waste;
  - Management of chemicals and avoidance of oil spillage on-site, especially under heavy rains and adverse weather;
  - Confirmation of the absence of silt content in the rock filling material and the filling work is properly conducted;
  - Dust control of exposed soil surface and stockpile of dusty material at reclaimed area;
  - Dust suppression measures for exposed earth surface and stockpile of dusty material;
  - Site runoff control measure during rainstorm; and
  - Dust and noise control of foundation works.

# **1. BASIC PROJECT INFORMATION**

# 1.1 Background

- 1.1.1 The Government of Hong Kong SAR will develop the Integrated Waste Management Facilities (IWMF) Phase 1 (hereafter "the Project") with incineration to achieve substantial bulk reduction of unavoidable municipal solid waste (MSW) and to recover energy from the incineration process. The IWMF will be on an artificial island to be formed by reclamation at the south-western coast of Shek Kwu Chau. Keppel Seghers Zhen Hua Joint Venture (KSZHJV) was awarded the contract under Contract No. EP/SP/66/12 Integrated Waste Management Facilities Phase 1 to construct and operate the Project.
- 1.1.2 An environmental impact assessment (EIA) study for the Project has been conducted and the EIA Report was approved under the Environmental Impact Assessment Ordinance on 17 January 2012. An Environmental Permit (EP) (EP No.: EP-429/2012) was granted to EPD on 19 January 2012 for the construction and operation of the Project. Subsequently, the EP was amended (EP No.: EP-429/2012/A) and a further EP (FEP) (EP No.: FEP-01/429/2012/A) was granted to the Keppel Seghers – Zhen Hua Joint Venture (KSZHJV) on 27 December 2017.
- 1.1.3 A further EP (FEP) (EP No.: FEP-02/429/2012/A) on Submarine Cable for the Development of the Project was granted to CLP Power Hong Kong Limited (CLP) on 17 Jan 2020.
- 1.1.4 The key design and construction elements of the Project include the Design and the Works including but not limited to the design, engineering procurement, construction, testing and commissioning of the Facility including:
  - Ground Treatment works;
  - Seawall and Breakwater construction;
  - Non-dredged Reclamation;
  - Other Marine works and Harbour and Port Facilities;
  - Site formation;
  - Municipal Solid Waste (MSW) Treatment Processes;
  - Energy Recovery for Power Generation and Surplus Electricity export;
  - Wastewater treatment process;
  - Desalination and water treatment process;
  - Civil works;
  - Building and Structural works;
  - Electrical and Mechanical works;
  - Building Services;
  - Architectural and Landscaping works; and
  - All other design and works required for the operation and maintenance of the Facility according to the Contract requirements.

# 1.1.5 The location of the IWMF near Shek Kwu Chau (SKC) and general layout of IWMF are shown in **Figure 1.1** and **Figure 1.2** respectively.

Contract No. EP/SP/66/12 Integrated Waste Management Facilities, Phase 1 Monthly EM&A Report No.50

Keppel Seghers – Zhen Hua Joint Venture

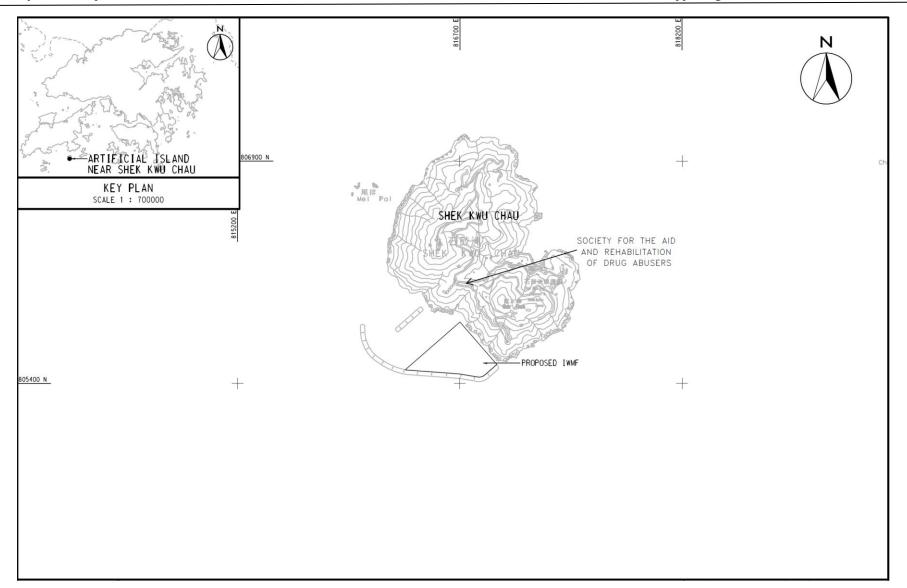


Figure 1.1 Location of the IWMF at the Artificial Island near SKC

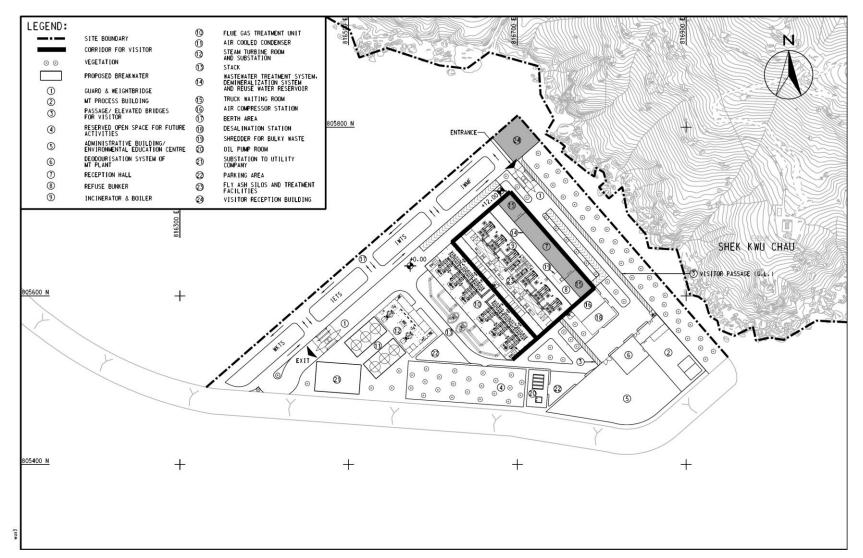
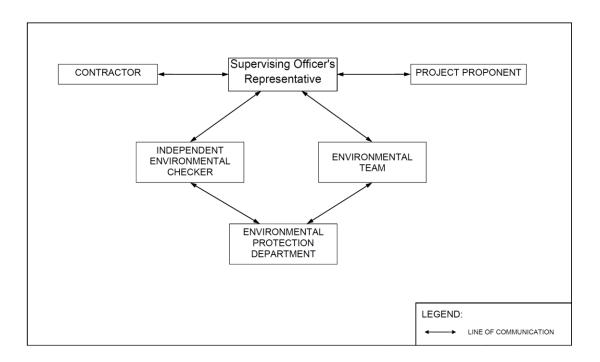


Figure 1.2 General Layout of the IWMF at the Artificial Island near SKC

## 1.2 The Reporting Scope

- 1.2.1 This is the 50<sup>th</sup> Monthly EM&A Report for the Project which summarizes the key findings of the EM&A programme during the reporting period from 1 August 2022 to 31 August 2022.
- 1.3 Project Organization
- 1.3.1 The Project Organization structure for Construction Phase is presented in **Figure 1.3**.



**Figure 1.3 Project Organization Chart** 

1.3.2 Contact details of the key personnel are presented in **Table 1.1** below:

**Table 1.1 Contact Details of Key Personnel** 

Party	Position	Name	Telephone no.
Keppel Seghers – Zhen Hua Joint Venture	Project Manager	Kenny Yu	2192-0606
Acuity Sustainability Consulting Limited	Environmental Team Leader	F.C. Tsang	2698-6833
ERM-Hong Kong, Limited	Independent Environmental Checker	Mandy To	2271-3000

## 1.4 Summary of Construction Works

1.4.1 Details of the major construction activities undertaken in this reporting period are shown in **Table 1.2** and **Figure 1.4** below. The construction programme is presented in **Appendix A**.

 Table 1.2 Summary of the Construction Activities Undertaken during the Reporting Month

Location of works	Construction activities undertaken	Remarks on progress
Reclamation area	Reclamation works	On-going
	• Installation of Instrumentation	On-going
	• Site Investigation works for foundation	• On-going
	• Foundation works (including Driven H Pile and Socketed H Pile)	• On-going
	• Foundation works (Bored Pile)	• Completed
	Pile cap construction	• On-going
	• Structural steel work	On-going
Seawall portion	Installation of Chinese Pod	On-going
	• Caisson extension works, from +3mPD to +6mPD, at Seawall A and B	• On-going
	• Construction of wave wall along the vertical seawall	• On-going

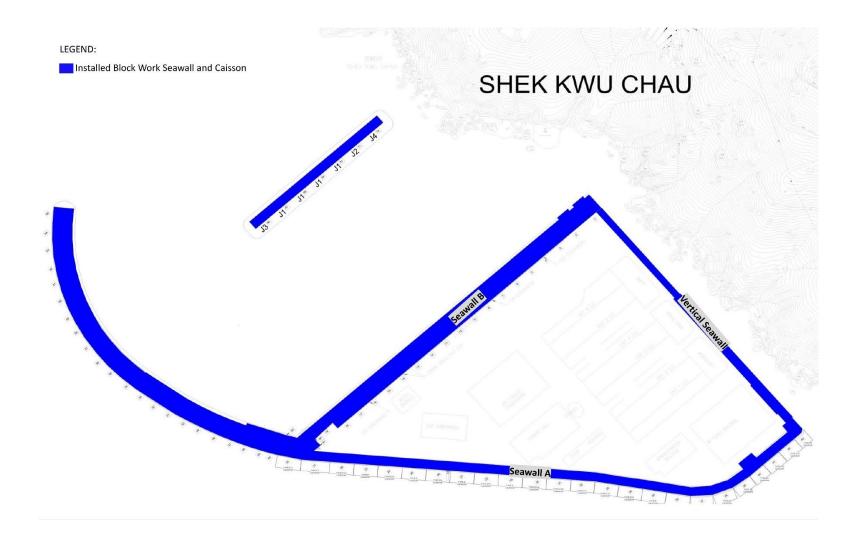


Figure 1.4 Location of Major Construction Activities Undertaken during the Reporting Month

## 1.5 Summary of Environmental Status

1.5.1 A summary of the valid permits, licences, and /or notifications on environmental protection for this Project is presented in **Table 1.3** 

# Table 1.3 Summary of the Status of Valid Environmental Licence, Notification, Permit and Documentations

Permit/ Licences/ Notification	Reference	Validity Period	Remarks
Variation of	EP-429/2012/A	Throughout	
Environmental Permit		the Contract	
Further	FEP-01/429/2012/A	Throughout	
Environmental Permit		the Contract	
Notification of	Ref No.: 428778	15/12/2017 -	
Construction Works		22/09/2024	
under the Air			
Pollution Control			
(Construction Dust)			
Regulation (Form			
NA)			
Wastewater Discharge	WT00039438-2021	15/02/2022 -	
Licence		28/02/2027	
Chemical Waste	WPN0017-933-K3301-	Throughout	
Producer Registration	01	the Contract	
	WPN5213-961-K3301-	Throughout	
	02	the Contract	_
	WPN5296-839-K3301-	Throughout	
	03	the Contract	
Construction Noise	GW-RS0251-22	13/04/2022-	Portion 1, 1A & 1B,
Permit (24 hours)		12/10/2022	supersede by GW-
			RS0727-22 on 31 August
			2022
	GW-RS0727-22	31/08/2022-	Portion 1, 1A & 1B
		28/02/2023	
Construction Noise	PP-RS0010-22	06/05/2022-	Portion 1
Permit (Percussive		05/11/2022	
piling)			
Billing Account for	A/C No.:7029768	Throughout	
Disposal of		the Contract	
Construction Waste			

1.5.2 The status for all environmental aspects is presented in **Table 1.4**.

Parameters	Status
Water Quality	Survas
Baseline Monitoring under Updated EM&A Manual and Detailed Plan on DCM	The baseline water quality monitoring result has been reported in Baseline Monitoring Report and submitted to EPD under FEP Condition 3.4
Impact Monitoring	On-going
Post DCM Monitoring	All DCM was completed on 14 October 2020, regular DCM monitoring for further 4 weeks (i.e form 16 October 2020 to 14 November 2020) was completed according to the approved Detailed Plan on Deep Cement Mixing
Initial Intensive DCM Monitoring	Conducted from 11 February 2019 to 10 March 2019, had not been resumed since there was no DCM related parameter exceeding the AL/LL.
Baseline Water Quality of wet season	Completed over 13 August 2018 to 7 September 2018
Noise	
Baseline Monitoring	The baseline noise monitoring result has been reported in Baseline Monitoring Report and submitted to EPD under FEP Condition 3.4
Impact Monitoring	On-going
Waste Management	
Mitigation Measures in Waste Monitoring Plan	On-going
Coral	
Pre-translocation Survey and Coral Mapping	The Coral Translocation Plan was submitted and approved by EPD under EP Condition 2.12
Coral Translocation	Completed on 28 March 2018
Post-Translocation Coral Monitoring	Survey affected by missing of translocated and tagged coral colonies after typhoons in September 2018, completed on 28 March 2019.
Pre-construction Coral Survey and Tagging	Completed on 26 June 2018
Tagged Coral Monitoring	Survey obstructed due to missing of tagged coral colonies after typhoons in September 2018
Coral Survey and Re- tagging	Re-tagging at Indirect Impact Site was conducted on 23 November and Re-tagging at Control Site was conducted on 3 December 2018.
Post Re-tagging Coral Monitoring	On-going
Marine Mammal	
Vessel-based Line-transect	The baseline marine mammal monitoring result has been
Survey Baseline Monitoring	reported in Baseline Monitoring Report and submitted to EPD under FEP Condition 3.4
Vessel-based Line-transect Survey Impact Monitoring	On-going
Land-based Theodolite Tracking	30 days of theodolite surveys were started on 21 Feb 2019 and completed in May 2019.
Passive Acoustic Monitoring	30 days of PAM surveys were started on 1 May 2019 and completed by the end of May 2019.

# Table 1.4 Summary of Status for Key Environmental Aspects under the UpdatedEM&A Manual

Parameters	Status
White-bellied Sea Eagle	
Baseline Monitoring	The baseline WBSE monitoring result has been reported in Baseline Monitoring Report and submitted to EPD under FEP Condition 3.4
Impact Monitoring	On-going
Environmental Audit	
Site Inspection covering Measures of Air Quality, Noise Impact, Water Quality, Waste, Ecological Quality, Fisheries, Landscape and Visual	On-going (Contraction of the second sec
Mitigation Measures in Marine Mammal Watching Plan (MMWP)	Installation of caisson No.19 was completed on 18 March 2021, which the reclamation area had been totally enclosed by permanent structure. Floating type silt curtain at marine access was removed on 18 March 2021. No enclosed area shall be formed by deployment of silt curtain for the remaining works programme.
Mitigation Measures in Detailed Monitoring Programme on Finless Porpoise (DMPFP)	Installation of caisson No.19 was completed on 18 March 2021, which the reclamation area had been totally enclosed by permanent structure. Floating type silt curtain at marine access was removed on 18 March 2021. No enclosed area shall be formed by deployment of silt curtain for the remaining works programme.
Mitigation Measures in Vessel Travel Details Daily Site Audit and	On-going Completed
Monitoring for Dredging Work	

- 1.5.3 Other than the EM&A work by ET, environmental briefings, trainings and regular environmental management meetings were conducted, in order to enhance environmental awareness and closely monitor the environmental performance of the contractors.
- 1.5.4 The EM&A programme has been implemented in accordance with the recommendations presented in the approved EIA Report and the Updated EM&A Manual. A summary of implementation status of the environmental mitigation measures for the construction phase of the Project during the reporting period is provided in **Appendix B**.


# 2. MARINE WATER QUALITY MONITORING


- 2.1 Water Quality Requirements
- 2.1.1 To ensure no adverse water quality impact, water quality monitoring is recommended to be carried out at the nearby water sensitive receivers (WSRs) during construction phase including proposed reclamation, breakwater construction, etc.
- 2.1.2 In accordance with the Updated EM&A Manual, impact water quality monitoring were conducted 3 days per week at mid-flood and mid-ebb tide to obtain impact water quality levels at the eleven monitoring stations during general water quality monitoring for the reporting period.
- 2.2 Water Quality Parameters, Time, Frequency
- 2.2.1 Dissolved Oxygen (DO), Turbidity, Suspended Solids (SS), Salinity and pH have been undertaken at the eleven monitoring stations during general water quality monitoring.
- 2.2.2 DO, temperature, salinity, turbidity and pH have been measured in-situ and the SS, has been assayed in a HOKLAS laboratory.
- 2.2.3 In associate with the water quality parameters, other relevant data were also measured, such as monitoring location/position, time, water depth, sampling depth, tidal stages, weather conditions and any special phenomena or work underway nearby were also recorded. The monitoring schedule is provided in **Appendix C**.
- 2.2.4 Impact water quality monitoring was conducted 3 days per week in the reporting period. All parameters were monitored during mid-flood and mid-ebb tides at three water depths for general water quality monitoring. The interval between two sets of monitoring has not been less than 36 hours.
- 2.2.5 **Table 2.1** summarizes the monitoring parameters, frequency and duration of the impact water quality monitoring during construction phase.

Parameter, unit	Frequency	No. of Depths	
<ul> <li>Water Depth (m)</li> <li>Temperature (°C)</li> <li>Salinity (ppt)</li> <li>pH (pH unit)</li> <li>Dissolved Oxygen (DO) (mg/L and % of saturation)</li> <li>Turbidity (NTU)</li> <li>Suspended Solids (SS), mg/L</li> </ul>	General water quality monitoring : 3 days per week, at mid-flood and mid-ebb tides	<ul> <li>3 water depths: 1m below sea surface, mid-depth and 1m above sea bed.</li> <li>If the water depth is less than 3m, mid-depth sampling only.</li> <li>If water depth less than 6m, mid-depth may be omitted.</li> </ul>	

# Table 2.1 Water Quality Monitoring Parameters, Frequency and Duration

- 2.3 Water Quality Monitoring Locations
- 2.3.1 Impact water quality monitoring was conducted at eleven monitoring locations (B1-B4, H1, C1, C2, F1, CR1, CR2 & M1) during general water quality monitoring in the reporting period as shown in **Figure 2.1**. As per the relocation proposal verified by IEC and approved by EPD, the monitoring location C1, C2, S2, F1 are relocated at C1A, C2A, S2A, F1A as equivalent points respectively to clear up the concerns from stakeholders.

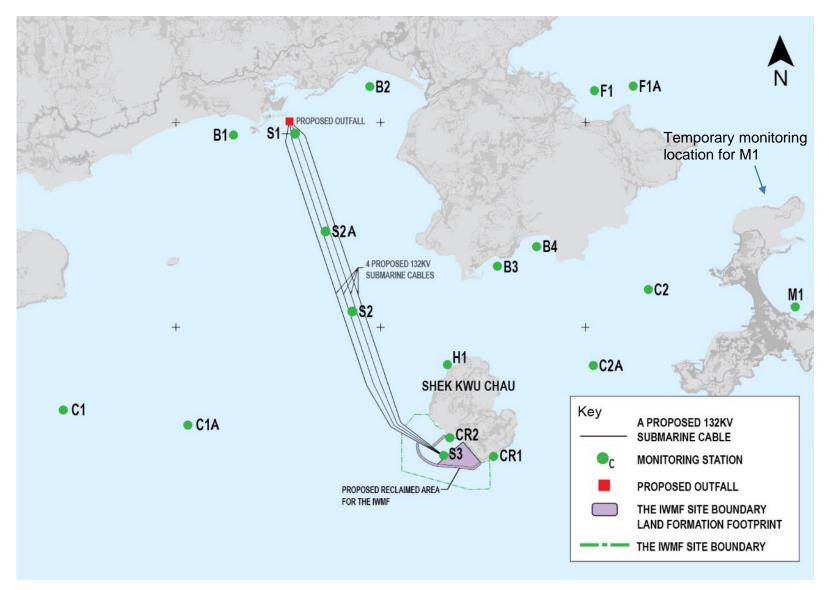



2.3.2 B1 to B4 are located at 4 beaches respectively at the southern shore of Lantau Island. Monitoring station H1 is located at the horseshoe crab habitat at northern SKC, while CR1 and CR2 are located at the coral communities at southwestern shore of SKC. Monitoring station F1 is located at the Cheung Sha Wan Fish Culture Zone while monitoring station M1 is located at Tung Wan at Cheung Chau. Monitoring station F1A is relocated for F1 at the Cheung Sha Wan Fish Culture Zone. S1, S2 and S3 are located at the northern landing site, midway and southern landing site of the proposed submarine cable, respectively. S2A is the relocated monitoring station of S2 which represents the midway landing site of the proposed submarine cable. S1, S2/S2A and S3 are required for monitoring due to the laying of submarine cable. Control stations C1 and C2 at far field locations are for comparison. Control stations C1A and C2A are relocated for C1 and C2 respectively as equivalent far field locations for comparison.

## 2.3.3 Fourteen monitoring stations are listed in **Table 2.2**.

Monitoring station	Description	Easting	Northing
B1	Beach – Cheung Sha Lower	813342	810316
B2	Beach – Pui O	815340	811025
B3	Beach – Yi Long Wan	817210	808395
B4	Beach – Tai Long Wan	817784	808682
H1	Horseshoe Crab – Shek Kwu Chau	816477	806953
C1	Control Station (note i)	810850	806288
C1A	Relocated Control Station	812823	806300
C2	Control Station (note ii)	819421	808053
C2A	Relocated Control Station	818869	806808
F1	Cheung Sha Wan Fish Culture Zone (note iii)	818631	810966
F1A	Cheung Sha Wan Fish Culture Zone	819109	810924
S1	Submarine Cable Landing Site	814245	810335
S2	Submarine Cable (note iv)	815076	807747
S2A	Submarine Cable	814808	808515
\$3	Submarine Cable Landing Site	816420	805621
CR1	Coral	817144	805597
CR2	Coral	816512	805882
M1	Tung Wan	821572	807799

Table 2.2 – Locations of Marine Water Quality Stations

Note:

i. Relocated to C1A in Mar 2019

ii. Relocated to C2A in Mar 2019

iii. Relocated to S2A in Mar 2019

iv. Relocated to F1A in Mar 2019

- 2.4 Impact Monitoring Methodology
- 2.4.1 General water quality monitoring was conducted three days per week, at mid-flood and mid-ebb tides, at the designated water quality monitoring stations during the reporting period.
- 2.4.2 The interval between 2 sets of monitoring was not less than 36 hours. Sampling was collected at three water depths, namely, 1m below water surface, mid-depth and 1m above seabed, except where the water depth is less than 6m, the mid-depth was omitted. If the water depth was less than 3m, only the mid-depth station was monitored.
- 2.4.3 All observations and results were presented in **Appendix D**. Duplicate in-situ measurements and water sampling were carried out in each sampling event. The monitoring probes were retrieved out of water after the first measurement and then redeployed for the second measurement. When the difference in value between the first and second readings of DO or turbidity is more than 25% of the value of the first reading, the reading would be discarded and further readings would be taken.

## In-situ Measurement

2.4.4 Levels of DO, pH, temperature, turbidity and salinity would be measured in-situ by portable and weatherproof measuring instrument, e.g. YSI ProDSS and Horiba U-53 Multiparameter complete with cable and sensor. (Refer to http://www.ysi.com/ProDSS for YSI ProDSS technical specification and https://static.horiba.com/fileadmin/Horiba/Products/Process and Environmental/Wat er\_Pollution/Instruction\_Manuals/U-50/U-50\_SS\_E.pdf for Horiba U-53 technical specification). Water current velocity and water current direction would be measured by portable and weatherproof current meter, e.g. SonTek Hydrosurveyor (Refer to https://www.sontek.com/hydrosurveyor for SonTek Hydrosurveyor M9 technical specification). Parameters measured by in-situ measurement is tabulated in Table 2.3

Parameter	Resolution	Range	
Temperature	0.1 °C	-5-70 °C	
Dissolved Oxygen (DO)	0.01 mg/L	0-50.0 mg/L	
Turbidity	0.1 NTU	0-1000 NTU	
pH	pH 0.01	pH 0-14	
Salinity	0.01 ppt	0-40 ppt	
Water Current Velocity	0.001m/s	±20m/s	
Water Current Direction	$\pm 1^{\circ}$	$\pm 2^{ m o}$	

Laboratory Analysis

2.4.5 Analysis of SS shall be carried out in a HOKLAS accredited laboratory, as shown in **Appendix E**. Sufficient water samples shall be collected at the monitoring stations for carrying out the laboratory determinations. The determination work shall be started within 24 hours after collection of the water samples. Analytical methods and detection limits for SS is presented in **Table 2.4**.

## Table 2.4 – Analytical Methods Applied to Water Quality Samples

Parameter	Analytical method	Detection Level	
Suspended Solids, SS	APHA 2540 D <sup>i</sup>	1 mg/L	

Footnote:

"APHA 2540 D" stands for American Public Health Association Standard Methods for the Examination of Water and Wastewater, 23<sup>rd</sup> Edition.

#### Field Log

- 2.4.6 Other relevant data was recorded, such as: monitoring location / position, time, water depth, weather conditions and any special phenomena underway near the monitoring station.
- 2.5 Monitoring Equipment
- 2.5.1 Equipment used in the impact water quality monitoring programme is summarized in **Table 2.5** below. Calibration certificates for the water quality monitoring equipment are attached in **Appendix F**.

**Table 2.5 Impact Water Quality Monitoring Equipment** 

Monitored Parameter	Equipment	Brand and Model	
DO, Temperature, Salinity,	Multi-functional Meter	Horiba U-53	
pH and Turbidity		YSI ProDSS Multi Parameter	
Coordinates	Positioning Equipment	Garmin GPSMAP 78s	
Water depth	Water Depth Detector	Hummingbird 160 Portable	
SS	Water Sampler	Wildco 2 L Water Sampler	
		with messenger	

# 2.5.2 Dissolved Oxygen and Temperature Measuring Equipment

The instrument is a portable and weatherproof DO probe mounted on the multifunctional meter complete with cable and sensor and is powered by a DC supply source. The equipment was capable of measuring:

- A DO level in the range of 0 50 mg/L; and
- Temperature of -5 70 degree Celsius.

# 2.5.3 Turbidity Measurement Instrument

The instrument is a portable and weatherproof turbidity-measuring probe mounted on the multi-functional meter and is powered by a DC supply source. The instrument is equipped with a photoelectric sensor which is capable of measuring turbidity between 0 - 1000 NTU.

#### 2.5.4 pH Measurement Instrument

The probe consists of a potentiometer, a glass electrode, a reference electrode and a temperature-compensating device mounted on the multi-functional meter. It is readable to 0.1 pH in a range of 0 to 14. Standard buffer solutions of at least pH 7 and pH 10 were used for calibration of the instrument before and after use.

#### 2.5.5 Salinity Measurement Instrument

A portable salinometer mounted on the multi-functional meter capable of measuring salinity in the range of 0-40 parts per thousand (ppt) was provided for measuring salinity of the water at each monitoring location.

#### 2.5.6 Sampler

The water sampler comprises a transparent PVC cylinder, with a capacity of not less than 2 litres, which can be effectively sealed with latex cups at both ends. The sampler has a positive latching system to keep it open and prevent premature closure until released by a messenger when the sampler is at the selected water depth.

## 2.5.7 Sample Containers and Storage

Water samples for SS were stored in high density polythene bottles with no preservative added, packed in ice (cooled to 4°C without being frozen) and delivered to the laboratory and analysed as soon as possible after collection. Sufficient volume of samples was collected to achieve the detection limit stated in **Table 2.4**.

#### 2.5.8 Water Depth Detector

A portable, battery-operated echo sounder was used for the determination of water depth at each designated monitoring station. This unit could either be hand-held or affixed to the bottom of the work boat, if the same vessel is to be used throughout the monitoring programme.

## 2.5.9 Monitoring Position Equipment

Hand-held digital Differential Global Positioning System (DGPS) with way point bearing indication and Radio Technical Commission for maritime (RTCM) Type 16 error message 'screen pop-up' facilities (for real-time auto-display of error messages and DGPS corrections from the Hong Kong Hydrographic Office) was provided and used to ensure that the water sampling locations were correct during the water quality monitoring work.

- 2.6 Maintenance and Calibration
- 2.6.1 The multi-functional meters were checked and calibrated before use. Multi-functional meters were certified by a laboratory accredited under HOKLAS or any other international accreditation scheme, and subsequently re-calibrated at three monthly intervals throughout all stages of the water quality monitoring. Responses of sensors and electrodes were checked with certified standard solutions before each use. Wet bulb calibration for a DO meter was carried out before commencement of monitoring and after completion of all measurements each day. Calibration was not conducted at each monitoring location as daily calibration is adequate for the type of DO meter employed.
- 2.6.2 Sufficient stocks of spare parts were provided and maintained for replacements when necessary. Backup monitoring equipment was prepared for uninterrupted monitoring during equipment maintenance or calibration during monitoring.

# 2.7 Action and Limit Levels

2.7.1 The Action and Limit Levels have been set based on the derivation criteria specified in the Updated EM&A Manual and Detailed DCM Plan, as shown in **Table 2.6** below.

Parameters	Action	Limit				
Construction Pl	Construction Phase Impact Monitoring					
DO in mg/L	$\leq$ 5 %-ile of baseline data	$\leq 4$				
SS in mg/L	$\geq$ 95 %-ile of baseline data or 120% of control station's SS at the same tide of the same day of measurement, whichever is higher	$\geq$ 99 %-ile of baseline data or 130% of control station's SS at the same tide of the same day of measurement, whichever is higher				
Turbidity in NTU	$\geq$ 95 %-ile of baseline data or 120% of control station's turbidity at the same tide of the same day of measurement, whichever is higher	$\geq$ 99 %-ile of baseline data or 130% of control station's turbidity at the same tide of the same day of measurement, whichever is higher				
Temperature in°C	1.8°C above the temperature recorded at representative control station at the same tide of the same day	2°C above the temperature recorded at representative control station at the same tide of the same day				

# Table 2.6 Criteria of Action and Limit Levels for Water Quality

2.7.2 Based on the baseline monitoring data and the derivation criteria specified above, the Action/Limit Levels have been derived and are presented in **Table 2.7** and **Table 2.8** for both dry seasons (October – March) and wet seasons (April – September).

Parameters	Action	Limit
Construction Pha	ase Impact Monitoring	
DO in mg/L	≤ 7.13	$\leq 4$
SS in mg/L	$\geq$ 8 or 120% of control station's SS at the same tide of the same day of measurement, whichever is higher	$\geq$ 10 or 130% of control station's SS at the same tide of the same day of measurement, whichever is higher
Turbidity in NTU	$\geq$ 5.6 or 120% of control station's turbidity at the same tide of the same day of measurement, whichever is higher	$\geq$ 12.8 or 130% of control station's turbidity at the same tide of the same day of measurement, whichever is higher
Temperature in°C	1.8°C above the temperature recorded at representative control station at the same tide of the same day	2°C above the temperature recorded at representative control station at the same tide of the same day

Table 2.7 Derived Action and Limit Levels for	· Water Quality Monitoring (Dry Season)
Tuble 217 Derived Action and Emitt Devels for	Water Quanty Monitoring (Dry Beason)

Notes:

i. "Depth-averaged" is calculated by taking the arithmetic means of reading of all three depths.

ii. For DO, non-compliance of the water quality limits occurs when monitoring result is lower than the limits.

iii. For turbidity, SS and Salinity, non-compliance of the water quality limits occurs when monitoring result is higher than the limits.

Parameters	Action	Limit				
Construction Pha	Construction Phase Impact Monitoring					
DO in mg/L	$\leq$ 5.28	$\leq$ 4				
SS in mg/L	$\geq$ 12 or 120% of control station's SS at the same tide of the same day of measurement, whichever is higher	$\geq$ 14 or 130% of control station's SS at the same tide of the same day of measurement, whichever is higher				
Turbidity in NTU	$\geq$ 4.0 or 120% of control station's turbidity at the same tide of the same day of measurement, whichever is higher	$\geq$ 4.3 or 130% of control station's turbidity at the same tide of the same day of measurement, whichever is higher				
Temperature in°C	1.8°C above the temperature recorded at representative control station at the same tide of the same day	2°C above the temperature recorded at representative control station at the same tide of the same day				

Notes:

i. "Depth-averaged" is calculated by taking the arithmetic means of reading of all three depths.

ii. For DO, non-compliance of the water quality limits occurs when monitoring result is lower than the limits.iii. For turbidity, SS and Salinity, non-compliance of the water quality limits occurs when monitoring result is higher than

the limits.

- 2.7.3 If exceedances were found during water quality monitoring, the actions in accordance with the Event and Action Plan shall be carried out according to **Appendix G**.
- 2.8 Monitoring Results and Observations
- 2.8.1 As confirmed by the Contractor on 14 October 2020, all DCM works was completed on 14 October 2020, the post DCM water quality monitoring was completed for further 4 weeks (i.e. from 16 October 2020 to 14 November 2020) according to the approved Detailed Plan on Deep Cement Mixing. As all DCM work and post DCM water quality monitoring were completed, no water quality monitoring was conducted at S1, S2A and S3 during the reporting period. General water quality monitoring at all the eleven monitoring stations were conducted on 1, 3, 5, 8, 12, 14, 16, 18, 20, 22, 24, 26, 29 and 31 August 2022 during the reporting period.
- 2.8.2 Monitoring results of 6 key parameters: Salinity, DO, turbidity, SS, pH and temperature in this reporting period, are summarized in **Table 2.9**, and details results are presented in **Appendix D**.

					Parameters			
Locations		Salinity (ppt)		• •	- pH	Turbidity	Suspended	Temp.(°C)
		Samily (ppt)	Surface & Middle	Bottom	P**	(NTU)	Solids (mg/L)	Temp.(C)
	Avg.	31.16	8.88	8.89	8.19	3.9	4.12	28.9
B1	Min.	28.48	7.95	7.97	7.98	2.8	2.50	26.4
	Max.	32.75	10.06	10.07	8.50	5.7	14.00	30.7
	Avg.	31.02	8.88	8.88	8.18	4.0	4.24	28.9
B2	Min.	28.15	8.04	8.08	7.98	2.2	2.50	26.5
	Max.	32.68	10.11	10.07	8.39	5.9	18.00	30.9
	Avg.	31.08	8.96	8.98	8.17	4.7	4.35	28.9
B3	Min.	27.81	7.88	7.87	7.89	2.1	2.50	26.4
L	Max.	32.39	10.00	9.99	8.41	7.9	17.00	31.0
	Avg.	31.09	8.95	8.93	8.20	4.5	4.42	28.9
B4	Min.	27.63	8.21	8.18	7.97	2.5	2.50	26.5
	Max.	32.23	9.95	10.02	8.42	6.9	15.00	30.8
	Avg.	31.12	8.90	8.90	8.18	5.9	3.91	28.9
C1A	Min.	28.83	8.11	8.09	7.97	3.5	2.50	26.3
	Max.	32.65	10.35	10.26	8.37	8.2	9.00	30.9
	Avg.	30.99	8.74	8.77	8.19	5.9	4.08	28.9
C2A	Min.	27.89	7.68	7.85	7.96	3.7	2.50	26.5
	Max.	32.48	9.95	9.94	8.47	8.7	18.00	30.9
	Avg.	30.98	8.84	8.86	8.18	4.5	4.68	28.9
CR1	Min.	27.90	7.96	7.95	7.97	2.6	2.50	26.5
	Max.	32.67	10.21	10.20	8.38	7.2	17.00	30.8
	Avg.	30.94	8.88	8.89	8.19	4.4	4.89	28.9
CR2	Min.	27.96	7.84	7.87	8.02	2.7	2.50	26.5
	Max.	32.33	9.99	10.10	8.37	6.7	22.00	30.6
	Avg.	31.08	8.91	8.90	8.19	4.8	4.24	28.9
F1A	Min.	27.94	8.04	8.12	7.97	2.7	2.50	26.4
	Max.	32.53	10.11	10.04	8.38	8.1	14.00	30.7
	Avg.	31.17	8.94	8.95	8.18	4.4	4.09	28.9
H1	Min.	27.43	8.18	8.18	7.94	2.5	2.50	26.3
	Max.	32.63	9.68	9.57	8.43	7.8	15.00	30.8
	Avg.	31.01	8.90	8.90	8.19	4.8	4.46	28.9
M1	Min.	28.31	7.91	7.95	8.04	2.5	2.50	26.4
	Max.	32.64	9.99	9.88	8.38	7.6	12.00	30.7
<b>S</b> 1	Avg.	-	-	-	-	-	-	-
51	Min.	-	-	-	-	-	-	-
	Max.	-	-	-	-	-	-	-
S2A	Avg.	-	-	-	-	-	-	-
S∠A	Min.	-	-	-	-	-	-	-
	Max.	-	-	-	-	-	-	-
<b>S</b> 3	Avg.	-	-	-	-	-	-	-
33	Min.	-	-	-	-	-	-	-
	Max.	-	-	-	-	-	-	-

#### **Table 2.9 Summary of Impact Water Quality Monitoring Results**

Notes:

i. "Avg", "Min" and "Max" is the average, minimum and maximum respectively of the data from measurements conducted under mid-flood and mid-ebb tides at three water depths, except that of DO where the data for "Surface & Middle" and "Bottom" are calculated separately.

ii. As all DCM works and post DCM water quality monitoring were completed, no water quality monitoring was conducted at S1, S2A and S3 in the report period.

iii. As all DCM works were completed on 14 October 2020, no water quality monitoring for total alkalinity was conducted in the report period.

- 2.8.3 During the reporting period, one (1) of the general water quality monitoring results of suspended solids (SS) obtained had exceeded Action Level. Three (3) of general water quality monitoring results of SS obtained during the reporting period had exceeded the Limit Level. Investigations were carried out for each exceedance during the reporting period.
- 2.8.4 No project-related Action Level & Limit Level exceedance was recorded from 1 August 2022 to 31 August 2022.
- 2.8.5 The scheduled water quality monitoring event on 10 August 2022 was cancelled due to adverse weather under tropical storm Mulan. A supplementary water quality monitoring event was conducted on 14 August 2022.
- 2.8.6 The scheduled water quality monitoring event for flood tide on 24 August 2022 was cancelled due to adverse weather under severe tropical storm Ma-on.
- 2.8.7 Details of the exceedance are presented in **Section 8**.
- 2.8.8 Mitigation measures minimizing the adverse impacts on water quality implemented are listed in the implementation schedule given in **Appendix B.**

# **3. NOISE MONITORING**

## 3.1 Monitoring Requirements

- 3.1.1 To ensure no adverse noise impact, noise monitoring is recommended to be carried out at the nearby noise sensitive receivers (NSRs) during construction phase.
- 3.1.2 In accordance with the Updated EM&A Manual, baseline noise level at the noise monitoring stations was established as presented in the Baseline Monitoring Report. Impact noise monitoring was conducted once per week in the form of 30-minutes measurements Leq, L10 and L90 levels recorded at each monitoring station between 0700 and 1900 hours on normal weekdays.
- 3.1.3 In accordance with the Updated EM&A Manual, additional weekly impact monitoring should be carried out during respective restricted hours period (1900 0700 hours) if the construction works were conducted at evening and night time. Additional weekly noise monitoring was conducted once per week in the form of 5-minutes measurements Leq, L10 and L90 levels recorded at each monitoring station between 1900 and 0700 hours as well as public holidays and Sundays.
- 3.2 Noise Monitoring Parameters, Time, Frequency
- 3.2.1 Impact noise monitoring was conducted weekly in the reporting period between 0700 and 1900 hours on normal weekdays. Additional impact noise monitoring was conducted weekly in the reporting period between 1900-0700 hours on all days as well as public holidays and Sundays.
- 3.2.2 Construction noise level measured in terms of the A-weighted equivalent continuous sound pressure level ( $L_{Aeq}$ ).  $L_{eq \ 30min}$  was used as the monitoring parameter for the time period between 0700 and 1900 hours on normal weekdays.  $L_{eq \ 5min}$  was used as the monitoring parameter for the time period between 1900 and 0700 hours as well as public holidays and Sundays. **Table 3.1** summarizes the monitoring parameters, frequency and duration of the impact noise monitoring and additional impact noise monitoring. The monitoring schedule is provided in **Appendix C**.

Monitoring Station Time		Duration	Parameters
	Day time: 0700-1900 hrs (during normal weekdays)	Once per week L <sub>eq 5min</sub> /L <sub>eq 30min</sub> (average of 6 consecutive L <sub>eq 5min</sub> )	L <sub>eq</sub> , L <sub>10</sub> & L <sub>90</sub>
M1/ N_S1, M2/ N_S2, M3/ N_S3	Evening time: 1900-2300 hrs (including normal weekdays, also public holidays and Sundays)	Once per week L <sub>eq 5min</sub> (3 sets of L <sub>eq</sub> <sub>5min</sub> )	L <sub>eq</sub> , L <sub>10</sub> & L <sub>90</sub>
	Night time: 2300-0700 hrs (including normal weekdays, also public holidays and Sundays)	Once per week L <sub>eq 5min</sub> (3 sets of L <sub>eq</sub> <sub>5min</sub> )	L <sub>eq</sub> , L <sub>10</sub> & L <sub>90</sub>

Table 3.1 Noise Monitoring Parameters, Time, Frequency and Duration

## 3.3 Noise Monitoring Locations

3.3.1 Three noise monitoring locations for impact monitoring and additional impact monitoring at the nearby sensitive receivers are shown in Figure 3.1.

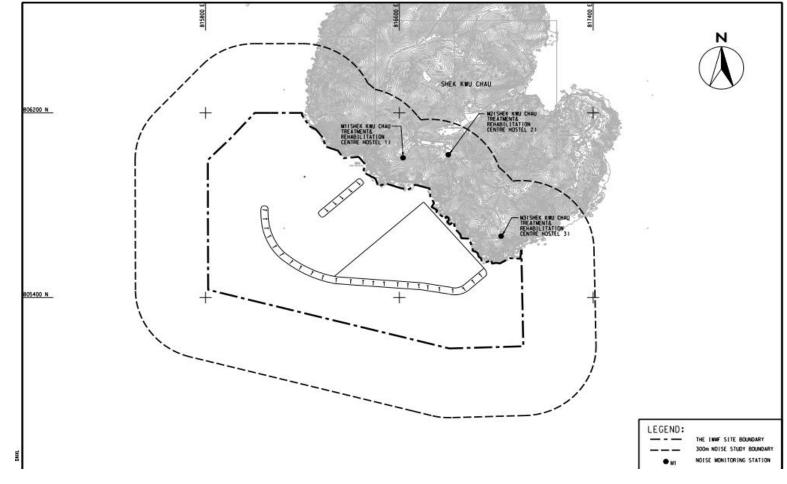


Figure 3.1 Noise monitoring locations at SKC

- 3.3.2 M1, M2 and M3 are Shek Kwu Chau Treatment and Rehabilitation Centre Hostel 1, 2 and 3 respectively of The Society for the Aid and Rehabilitation of Drug Abusers (SARDA) located at southern part of Shek Kwu Chau.
- 3.3.3 Measurements at M1 & M3 were conducted at a point 1m from the exterior of the sensitive receivers building façade and at a position 1.2m above the ground. Measurement setup at M3 has been varying with minor adjustment to minimize the disturbance to the users of Treatment Centre. Measurement at M2 was conducted at a point 1m from building façade of the ceiling of 1st floor level for avoidance of mutual disturbance with users of Treatment Centre. The minor adjustment of monitoring locations, which were in favour to mutual convenience with the users of Treatment Centre, were found with no effect on monitoring result based on on-site observation and experience from the Baseline monitoring of the Project. The noise monitoring stations are summarized in **Table 3.2** below.

Station	NSR ID in EIA Report	Noise Monitoring Location	Type of sensitive receiver(s)	Measurement Type
M1	N_S1	Shek Kwu Chau Treatment & Rehabilitation Centre Hostel 1	Residential	Façade
M2	N_S2	Shek Kwu Chau Treatment & Rehabilitation Centre Hostel 2	Residential	Façade
M3	N_S3	Shek Kwu Chau Treatment & Rehabilitation Centre Hostel 3	Residential	Façade

#### **Table 3.2 Noise Monitoring Location**

- 3.4 Impact Monitoring Methodology
- 3.4.1 At each designated monitoring location, measurements of six 5-minute A-weighted equivalent sound pressure level [" $L_{eq 5min}$ "] was carried out between 0700 and 1900 hours for daytime measurements on a normal weekdays (excluding Sunday or general holiday). The measured six impact noise levels at each monitoring location shall then be averaged in logarithmic scale and expressed in terms of the 30-minute A-weighted equivalent continuous sound pressure level ( $L_{eq 30min}$ ) for the time period between 0700 and 1900 hours on normal weekdays.
- 3.4.2 At each designated monitoring location, measurements of three 5-minute A-weighted equivalent sound pressure level ["L<sub>eq 5min</sub>"] was carried out between 1900 and 0700 hours for evening time and night time measurements.
- 3.4.3 The monitoring procedures are as follows:
  - The microphone head of the sound level meter was normally positioned 1 m exterior of the noise sensitive façade and lowered sufficiently so that the building's external wall acts as a reflecting surface.
  - If there is a problem with the access to the normal monitoring position, an alternative may be chosen and appropriate correction would be applied according to acoustic principle when necessary. For reference, +3 dB(A) correction would be made for free-field measurements.
  - The battery condition was checked to ensure good functioning of the meter.
  - Parameters such as frequency weighting, the time weighting and the measurement time were set as follows:
    - Frequency weight: A
    - Time weighting: Fast
    - Measurement time: 5 minutes

- Prior to and after noise measurement, the meter was calibrated using the calibrator for 94.0 dB at 1000Hz. If the difference in the calibration level before and after measurement is more than 1.0 dB, the measurement was considered invalid and repeat of noise measurement was required after re-calibration or repair of the equipment.
- Noise monitoring was carried out for 30 minutes by sound level meter. At the end of the monitoring period, noise levels in terms of L<sub>eq</sub>, L<sub>10</sub> and L<sub>90</sub> were recorded. In addition, site conditions and noise sources were recorded when the equipment was checked and inspected.
- All the monitoring data within the sound level meter system was downloaded through the computer software.
- 3.5 Monitoring Equipment
- 3.5.1 Integrated sound level meter was used for the noise monitoring. The meter shall comply with the International Electrotechnical Commission Publications 651: 1979 (Type 1) and 804: 1985 (Type 1) specifications.
- 3.5.2 Equipment used in the impact noise monitoring programme is summarized in Table3.3 below. Calibration certificates for the noise monitoring equipment are attached in Appendix H.

# Table 3.3 Impact Noise Monitoring Equipment

Equipment	Brand and Model
Sound Level Meter	SVANTEK 971
Sound Calibrator	SVANTEK SV 33B

- 3.6 Maintenance and Calibration
- 3.6.1 The maintenance and calibration procedures were as follows:
  - The microphone head of the sound level meter and calibrator were cleaned with a soft cloth at quarterly intervals.
  - The sound level meter and calibrator were checked and calibrated at yearly intervals
  - Immediately prior to and following each noise measurement, the accuracy of the sound level meter shall be checked using an acoustic calibrator generating a known sound pressure level at a known frequency. Measurements may be accepted as valid only if the calibration levels from before and after the noise measurement agree to within 1.0dB.
- 3.7 Action and Limit Levels
- 3.7.1 The Action/Limit Levels in line with the criteria of Practice Note for Professional Persons (ProPECC PN 2/93) "Noise from Construction Activities – Non-statutory Controls" and Technical Memorandum on Environmental Impact Assessment Process issued by HKSAR Environmental Protection Department ["EPD"] under the Environmental Impact Assessment Ordinance, Cap 499, S.16 is presented in Table 3.4.

Time Period	Action	Limit (dB(A))
0700-1900 hrs on normal	When one documented	$75 dD(\Lambda)$
weekdays	complaint is received	75 dB(A)

#### Table 3.4 Action and Limit Levels for Noise per Updated EM&A Manual

Notes: If works are to be carried out during restricted hours, the conditions stipulated in the Construction Noise Permit (CNP) issued by the Noise Control Authority have to be followed.

- 3.7.2 If exceedances were found during noise monitoring, actions in accordance with the Event and Action Plan shall be carried out according to **Appendix I**.
- 3.8 Monitoring Results and Observations
- 3.8.1 Impact monitoring for noise impact for daytime was carried out on 1, 19, 22, 29 August 2022. Impact monitoring for noise impact for evening time and night time was carried out on 1&2, 19&20, 22&23 and 29&30 August 2022. The impact noise levels at Noise Monitoring Stations at SKC (i.e. M1/N\_S1 to M3/N\_S3) are summarized in **Table 3.6**, **Table 3.7** and **Table 3.8** respectively. Details of noise monitoring results are presented in **Appendix J**.
- 3.8.2 The scheduled noise monitoring on 12&13 August 2022 was cancelled due to the emergency operation of Shek Kwu Chau Treatment and Rehabilitation Centre.
- 3.8.3 Major construction activity, major noise source and extreme weather which might affect the results were recorded during the impact monitoring.
- 3.8.4 According to our field observations, the major noise source identified at the noise monitoring station in the reporting month are summarised in **Table 3.5**. Sound from the intermittent piling work was the noticeable noise source for monitoring stations M1, M2 and M3. Air conditioning units were also observed nearby monitoring stations M3.

Monitoring Station	Major Noise Source
M1	Sound from the intermittent piling work
M2	Sound from the intermittent piling work
M3	Sound from the intermittent piling work, air-conditioner

#### **Table 3.5 Summary of Field Observation**

3.8.5 No data from impact monitoring during daytime has exceeded the stipulated limit level at 75 dB(A).

Location	Measured Noise Level in dB(A)									
	Range of Leq 30min	Range of L <sub>10 30min</sub>	Range of L <sub>90 30min</sub>							
M1	61.5 - 65.8	65.0 - 68.9	53.4 - 61.9							
M2	56.2 - 60.8	58.5 - 63.8	52.2 - 56.0							
M3	56.5 - 63.2	58.1 - 65.0	51.4 - 61.4							

Table 3.6 Summary of Impact Noise Monitoring Results during Day Time (0700 – 1900 hours)

- 3.8.6 Applicable mitigation measures for construction works are fully implemented as shown in **Appendix B**, where double-glazed windows and air conditioning system were also installed and confirmed operable for the NSRs (N\_S1, N\_S2 & N\_S3).
- 3.8.7 During the noise monitoring event, frontline staff of ET had inquired the treatment centre users on any noise disturbance from the construction activities at evening and night time, where no complaint and adverse opinions was received.
- 3.8.8 Where site inspection and auditing on Contractor's record have shown that the conditions stipulated in the Construction Noise Permit (CNP) issued by the Noise Control Authority for construction works during restricted hours were followed, no inappropriate practice was spotted during evening time and night time construction works. Thus, the stipulated requirement on noise impact control during night time and evening time was achieved.

Location	Measured Noise Level in dB(A)									
	Range of Leq 5min	Range of L <sub>10 5min</sub>	Range of L90 5min							
M1	50.0 - 58.8	50.7 - 61.2	49.3 - 53.9							
M2	53.2 - 57.8	53.9 - 59.2	52.2 - 55.9							
M3	49.0 - 57.5	51.5 - 58.4	46.4 - 56.7							

Table 3.7 Summary of Additional	Impact	Noise	Monitoring	Results	during	Evening
Time (1900 – 2300 hours)						

Location	Measured Noise Level in dB(A)									
	Range of L <sub>eq 5min</sub>	Range of L <sub>10 5min</sub>	Range of L <sub>90 5min</sub>							
M1	46.3 - 54.8	46.7 – 56.7	45.8 - 52.1							
M2	51.7 - 55.4	52.0 - 58.0	50.6 - 53.9							
M3	41.6 - 57.1	42.5 - 57.5	40.2 - 56.6							

Table 3.8 Summary of Additional Impact Noise Monitoring Results during Night Time(2300 – 0700 hours)

# 4. WASTE

4.1 The waste generated from this Project includes inert construction and demolition (C&D) materials, and non-inert C&D materials. Non-inert C&D materials are made up of general refuse, vegetative wastes and recyclable wastes such as plastics and paper/cardboard packaging waste. Steel materials generated from the project are also grouped into non-inert C&D materials as the materials were not disposed of with other inert C&D materials.

4.2 As advised by the Contractor, 13,249.4m<sup>3</sup> C&D material was generated on site in the reporting month and reused in other projects. For C&D waste, 76,030.0kg metals were generated and collected by registered recycling collector. 1887.0kg of paper was collected by the registered recycling collector. No plastic waste was collected by registered recycling collector. No chemical waste collector. 117.0m<sup>3</sup> of other types of wastes (e.g. general refuse) was disposed of at designated landfill. No fill sand public fill was imported during the reporting period. 24,521.0m<sup>3</sup> of fill rock was imported respectively during the reporting period.

4.3 Chemical waste generated from land-based construction activities was stored in the chemical waste cabinet for temporary storage.

4.4 With reference to relevant handling records and trip tickets of this Project, the quantities of different types of waste generated in the reporting month are summarised in **Table 4.1**. Details of cumulative waste management data are presented as a waste flow table in **Appendix K**.

4.5 Although there is not much waste generation anticipated in the coming month from the Project, the Contractor is advised to sort and store any solid and liquid waste on-site properly prior to disposal.

Table 4.1 Quantities of Waste Generated from the Project during August	2022
--	------

	Actual Quantities of Inert C&D Materials Generated Monthly								Actual Quantities of C&D Wastes Generated Monthly				thly	
	Total	Hard Rock	Poused in	Reused in	Disposed	Imported Fill			Day	Paper /	Plastics	Chemical Waste		Others,
Reporting Month	Quantity Generated	and Large Broken Concrete (see Note 1)	Reused in the Contract	other Projects	Disposed as Public Fill	Sand	Sand Public Fill Rock		Metals	-				e.g. general refuse (see Note 3)
	(in ,000m <sup>3</sup> )	(in ,000m <sup>3</sup> )	(in ,000m <sup>3</sup> )	(in ,000m <sup>3</sup> )	(in ,000m <sup>3</sup> )		(in ,000m <sup>3</sup> )		(in ,000kg)	(in ,000kg)	(in ,000kg)	(in ,000kg)	(in ,000L)	(in ,000m <sup>3</sup> )
Aug 2022	13.2494	0	0	13.2494	0	0	0	24.5210	76.0300	1.8870	0	0	0	0.1170

Notes: (1) Broken concrete for recycling into aggregates.

(2) Plastics refer to plastic bottles/ containers, plastic sheets/ foam from packaging materials.

(3) Use the conversion factor: 1 full load of dumping truck being equivalent to  $6.5m^3$  by volume.

# 5. CORAL


- 5.1 Coral Monitoring Requirements
- 5.1.1 To monitor the health condition of corals during different phases, corals located within areas likely to be affected by the Project, corals located at control sites (areas unlikely to be affected by the Project), the trans-located coral colonies as well as the tagged natural coral colonies at the recipient site were chosen, in order to identify any adverse indirect impact from the marine works. The size, percentage cover and health condition of corals (i.e. any sign of abnormal appearance, such as layer of mucus, bleaching, partial mortality etc.) at representative transects should be recorded during each monitoring.
- 5.2 Coral Monitoring Parameters, Time, Frequency
- 5.2.1 Rapid Ecological Assessment (REA) survey was conducted on 26 June 2018 at the suggested control site and indirect impact site within two weeks before commencement of the construction work which was 29 June 2018. 10 selected hard coral colonies with the similar species were tagged at both control and indirect impact sites. Following coral translocation in the recipient site R3, 16 coral colonies attached to rocks less than 50 cm in diameter were translocated and tagged, as well as 10 selected natural coral colonies, at the recipient site. One additional REA survey was conducted in December 2018 to further assess the seabed condition at Indirect Impact Site after Typhoon Mangkhut.
- 5.2.2 Tagged coral colonies at the suggested control site and indirect impact site are being monitored weekly for the first month and followed by monthly monitoring for two months. Quarterly monitoring will be carried out after the first three-month of monthly monitoring until the completion of marine works and bi-annual monitoring will be carried out after the completion of marine works. The selected Control Site is located at Yuen Kong Chau of Soko Islands about 7 km away from the project area. Tagged coral colonies at the proposed recipient site are being monitored quarterly for one year. The selected recipient site R3 is located at the opposite side of the Project area at about 2 km away. The detailed survey of the Control Site and Impact Site were conducted before the commencement of the Construction Phase.
- 5.2.3 Monitoring recorded the following parameters (using the same methodology adopted during the pre-translocation survey); the size, presence, health conditions (percentage of mortality/bleaching) and percentage of sediment of each tagged coral colony. The general environmental conditions including weather, sea, and tidal conditions of impact site, control site and recipient site were monitored.
- 5.2.4 **Table 5.1** summarizes the monitoring locations, time and frequency of the tagged coral colonies monitoring. The monitoring schedule is provided in **Appendix C**.

Monitoring Location	Monitoring Month/Year	Frequency	No. of Monitoring Survey
	1 <sup>st</sup> Month	Weekly Survey	4
	2 <sup>nd</sup> to 3 <sup>rd</sup> Months	Monthly Survey	2
	4 <sup>th</sup> Month (postponed	Re-tagging of Cora	al Colonies in Indirect
	to 5 <sup>th</sup> month due to	Impact Site after Ty	phoon Mangkhut
	diver accident in Shek		
	Kwu Chau in October		
	2018)		
	4 <sup>th</sup> Month (postponed		al Colonies in Control
	to 5 <sup>th</sup> month due to	Site after Typhoon N	Vlangkhut
	diver accident in Shek		
	Kwu Chau in October 2018 and further		
	postpone to $6^{th}$ month		
	due to adverse		
	weather)		
	5 <sup>th</sup> Month (postponed	Post Re-tagging	1
	to $6^{th}$ month due to	Monthly Survey	-
	diver accident in Shek		
	Kwu Chau and further		
10 colored bond const	postponed to 7 <sup>th</sup>		
10 selected hard coral colonies at control site /	month due to delay of		
indirect impact site	re-tagging activities at		
Ī	both Indirect Impact		
	Site and Control Site)		
	7 <sup>th</sup> to 51 <sup>st</sup> Months	Quarterly Survey	15
	(postponed to 8 <sup>th</sup> to		
	76 <sup>th</sup> month due to diver accident in Shek		
	Kwu Chau in October		
	2018)		
	52 <sup>nd</sup> to 76 <sup>th</sup> Months	Bi-annually	4
	(The marine	Survey	
	construction work is	~~~~~	
	anticipated to be		
	completed by		
	September 2022, the		
	frequency of		
	monitoring will be		
	changed to bi-annual		
	with reference to the		
	Updated EM&A		
	Mannual (Rev.E) )		
16 translocated hard coral colonies and 10			
selected natural hard	1 <sup>st</sup> Year	Quarterly Survey	4
coral colonies at	1 1001	Zaurieri, Burvey	
recipient site R3			

 Table 5.1 Tagged Coral Monitoring Locations, Time and Frequency

#### 5.3 Coral Monitoring Locations

5.3.1 Location of the ten tagged coral colonies at each of the proposed indirect impact site (re-tagging after typhoon Mangkhut), control site (baseline) and recipient site R3 (translocation) are shown in **Figure 5.1**, **Figure 5.2** and **Figure 5.3** respectively:

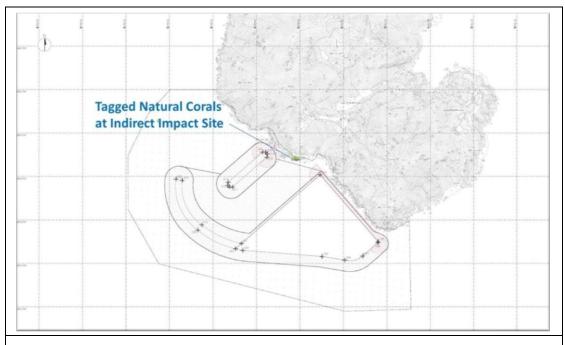






Figure 5.2 Tagged Natural Corals at Control Site Near Yuen Kong Chau for retagging after typhoon Mangkhut



Figure 5.3 Tagged Translocation Corals at Recipient Site R3 near SKC

5.3.2 The GPS coordinates of the tagged coral colonies, retagged coral colonies and recipient site were shown in **Table 5.2**, **Table 5.3** and **Table 5.4** respectively.

Coral #	GPS Co	ordinates
1	N22°09'45.96"	E113°54'57.81"
2R	N22°11'29.12"	E113°59'09.01"
3	N22°09'45.81"	E113°54'57.78"
4	N22°09'45.70"	E113°54'57.95"
5R	N22°11'29.10"	E113°59'09.18"
6	N22°09'45.75"	E113°54'58.02"
7R	N22°11'29.17"	E113°59'08.86"
7	N22°09'45.65''	E113°54'57.94"
8	N22°09'45.53"	E113°54'57.90"
9	N22°09'46.23"	E113°54'54.70"
10R	N22°11'29.18"	E113°59'08.91"

Table 5.2 Tagged Natural Corals during Baseline and Re-tagged Natural Corals afterTyphoon Manghkut at Control Site near Yuen Long Chau

Notes:

i. The re-tagged corals were marked as ##**R**.

# Table 5.3 Re-tagged Natural Corals after Typhoon Manghkut at Indirect Impact Site near SKC

Coral # note i	GPS Coordinates			
11R	N22°11'29.14"	E113°59'08.92"		
12R	N22°11'29.12"	E113°59'09.01"		
13R	N22°11'29.11"	E113°59'09.07"		
14R	N22°11'29.13"	E113°59'09.12"		
15R	N22°11'29.10"	E113°59'09.18"		
16R	N22°11'29.07"	E113°59'09.23"		
17R	N22°11'29.17"	E113°59'08.86"		
18R	N22°11'29.14"	E113°59'08.94"		
19R	N22°11'29.20"	E113°59'08.81"		
20R	N22°11'29.18"	E113°59'08.91"		

Notes:

i. The re-tagged corals were marked as ##**R**.

#### Table 5.4 GPS Coordinates of Recipient Site R3

Site	GPS Coordinates		
R3	N22°11'43.69"	E113°28.99"	

- 5.4 Impact Monitoring Methodology
- 5.4.1 Health status of coral was assessed by the following criteria:
  - Hard coral: Percentage of surface area exhibiting partial mortality and blanched/bleached area of each coral colony and degree of sedimentation.
- 5.5 Action and Limit Levels
- 5.5.1 Monitoring result was reviewed and compared against the below Action Level and Limit Level (AL/LL) as set with the below **Table 5.5** and **Table 5.6**.

Parameter	Action Level	Limit Level
Mortality	a 15% increase in the percentage of partial mortality on the corals occurs at more than 20% of the tagged indirect impact site	percentage of partial mortality on the corals occurs at more than 20% of the tagged indirect impact site coral colonies that is not recorded on the tagged corals at the

#### Table 5.5 Action and Limit Levels for Construction Phase Coral Monitoring


#### Table 5.6 Action and Limit Levels for Post-Translocation Coral Monitoring

Parameter	Action Level	Limit Level
Mortality	Monitoring a 15% increase in the percentage of partial mortality on the corals occurs at more than 20% of the translocated coral colonies	mortality on the corals occurs at more than 20% of the translocated coral colonies that is not recorded on the original corals in the recipient site,

- 5.5.2 If exceedance was found during coral monitoring. The actions in accordance with the Event and Action Plan should be carried out according to **Appendix L.**
- 5.6 Monitoring Results and Observations
- 5.6.1 No coral monitoring survey had been done during the reporting period and the 15<sup>th</sup> quarterly coral monitoring during construction phase at both Indirect Impact Site and Control Site would be scheduled in September 2022.

# 6. MARINE MAMMAL

- 6.1 Monitoring Requirements
- 6.1.1 The marine mammal monitoring programme would focus on Finless Porpoise, as the study area near Shek Kwu Chau has been identified as a hotspot for this species, while the Chinese White Dolphins rarely occurred there in the past.
- 6.1.2 The monitoring will verify the predicted impacts on marine mammals and examine whether the mitigation measures recommended in the EIA report have been effectively implemented to protect marine mammals from negative impacts from construction activities.
- 6.1.3 The Vessel-based Line-transect Survey, the Passive Acoustic Monitoring and the Land-based Theodolite Tracking will be conducted to provide systematic, quantitative measurements of occurrence, encounter rate, habitat use, movement and behavioural patterns of marine mammals within or near the Project Area during construction and operational phases.
- 6.1.4 The mammal monitoring works during construction consist of the following three survey methods:
  - Vessel-based Line-transect Survey to monitor the occurrence of Finless Porpoises (and Chinese White Dolphins) in the study area during construction works, by comparing with the findings of the pre-construction marine mammal monitoring;
  - Passive Acoustic Monitoring to study the usage of the Project Area and two control sites in South Lantau Waters by Finless Porpoise during construction works, in reference with the baseline findings of the pre-construction marine mammal monitoring; and
  - Land-based Theodolite Tracking to study the movement and behavioral pattern of Finless Porpoise within and around the Project Area during construction works.
- 6.1.5 The marine mammal observation works of Marine Mammal Exclusion Zone (MMEZ) and Marine Mammal Watching as two of the specific mitigation measures recommended in the approved EIA report shall be fully and properly implemented for the Project to minimize disturbance on Finless Porpoise during construction and operational phases.
- 6.2 Survey Methods
- 6.2.1 Vessel-based Line-transect Survey
- 6.2.1.1 For the vessel-based marine mammal surveys, the monitoring team adopted the standard line-transect method (Buckland et al. 2001) as same as that adopted during the EIA study and pre-construction phase monitoring to allow fair comparison of marine mammal monitoring results.
- 6.2.1.2 Eight transect lines are set at Southeast Lantau survey area, including Shek Kwu Chau, waters between Shek Kwu Chau and the Soko Islands, inshore waters of Lantau Island (e.g. Pui O Wan) as well as southwest corner of Cheung Chau as shown in **Figure 6.1** below:

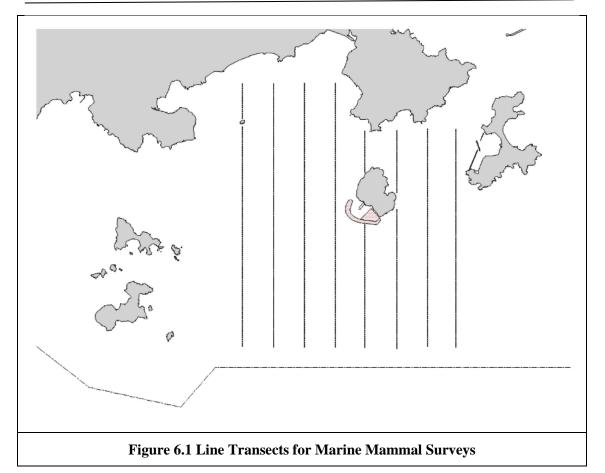

6.2.1.3 The surveys should cover all 4 seasons in order to take natural fluctuation and seasonal variations into account for data analysis of distribution, encounter rate, density and habitat use of both porpoises and dolphins (if any). In comparison to the baseline monitoring results, results from the analysed construction phase monitoring data would allow the detection of any changes of their usage of habitat, in response to the scheduled construction works. The monitoring surveys shall be conducted throughout the construction phase involving marine construction work with the frequency shown in **Table 6.1** below:

Season	Months	Frequency
Peak Season	December, January, February,	Twice per month
	March, April & May	
Non-peak Season	June, July, August, September, October & November	Once per month

6.2.1.4 For each vessel survey, a 15-m inboard vessel with an open upper deck (about 4.5 m above water surface) would be used to make observations from the flying bridge area. Two experienced marine mammal observers (a data recorder and a primary observer) would make up the on-effort survey team, and the survey vessel would transit different transect lines at a constant speed of 13-15 km per hour. The data recorder shall search with unaided eyes and fill out the datasheets, while the primary observer shall search for dolphins and porpoises continuously through 7 x 50 marine binoculars. Both observers shall search the sea ahead of the vessel, between 270° and 90° (in relation to the bow, which is defined as 0°). Two additional experienced observers shall be available on the boat to work in shift (i.e. rotate every 30 minutes) in order to minimize fatigue of the survey team members. All observers shall be

experienced in small cetacean survey techniques and identifying local cetacean species with extensive training by marine mammal specialist of the ET.


- 6.2.1.5 During on-effort survey periods, the survey team shall record effort data including time, position (latitude and longitude), weather conditions (Beaufort sea state and visibility), and distance travelled in each series (a continuous period of search effort) with the assistance of a handheld GPS (Garmin eTrex Legend). Data including time, position and vessel speed would also be automatically and continuously logged by handheld GPS throughout the entire survey for subsequent review.
- 6.2.1.6 When porpoises or dolphins are sighted, the survey team shall end the survey effort, and immediately record the initial sighting distance and angle of the porpoise or dolphin group from the survey vessel, as well as the sighting time and position. Then the research vessel shall be diverted from its course to approach the animals for species identification, group size estimation, assessment of group composition, behavioural observations, and collection of identification photos (feasible only for Chinese White Dolphin). The perpendicular distance (PSD) of the porpoise or dolphin group to the transect line would then be calculated from the initial sighting distance and angle, which shall be used in the line-transect analysis for density and abundance estimation.
- 6.2.1.7 The line-transect survey data shall be integrated with a Geographic Information System (GIS) to visualize and interpret different spatial and temporal patterns of porpoise and dolphin distribution using their sighting positions collected from vessel surveys. Location data of porpoise and dolphin groups would be plotted on map layers of Hong Kong using a desktop GIS (e.g. ArcView© 3.1) to examine their distribution patterns in details. The encounter rate could be used as an indicator to determine areas or time periods of importance to porpoises within the study area. For encounter rate analysis of finless porpoises, only survey data collected under Beaufort 2 or below condition would be used for encounter rate analysis.
- 6.2.1.8 To take into account of the variations of survey effort across different sections within survey area, the quantitative grid analysis of habitat use would be conducted to examine finless porpoise usage among 1-km<sup>2</sup> grids within the Southeast Lantau survey area. For the grid analysis, SPSE (sighting density) and DPSE (porpoise density) values would be deduced for evaluation on level of porpoise usage. First, positions of on-effort porpoise sightings from the study period are plotted onto 68 grids (1 km x 1 km each) within the survey area. Sighting density grids and porpoise density grids shall then be normalized with the amount of survey effort conducted within each grid. The total amount of survey effort spent on each grid shall be calculated by examining the survey coverage on each line-transect survey to determine how many times the grid had been surveyed during study period. With the amount of survey effort calculated for each grid, the sighting density and porpoise density of each grid shall be further normalized (i.e. divided by the unit of survey effort).
- 6.2.1.9 The newly-derived unit for sighting density was termed SPSE, representing the number of on-effort sightings per 100 units of survey effort. In addition, the derived unit for actual porpoise density was termed DPSE, representing the number of dolphins/porpoise per 100 units of survey effort. Among the 1-km<sup>2</sup> grids that were partially covered by land, the percentage of sea area was calculated using GIS tools, and their SPSE and DPSE values were adjusted accordingly. The following formulae shall be used to estimate SPSE and DPSE in each 1-km<sup>2</sup> grid within the study area:

SPSE = ((S / E) x 100) / SA%DPSE = ((D / E) x 100) / SA%

where S = total number of on-effort sightings D = total number of dolphins/porpoises from on-effort sightings E = total number of units of survey effortSA% = percentage of sea area

#### 6.2.2 Passive Acoustic Monitoring (PAM)

The PAM aims to study the usage of an area by Finless Porpoise by using an array of automated static porpoise detectors (e.g. C-POD) which would be deployed at different locations to detect the unique ultra-high frequency sounds produced by Finless Porpoise. During the construction period, the PAM survey will be conducted including placement of two passive porpoise detectors outside the Project Area as control site (i.e. within Pui O Wan and to the south of Tai A Chau) and one porpoise detector within the Project Area (i.e. near Shek Kwu Chau) as shown in **Figure 6.2** below.

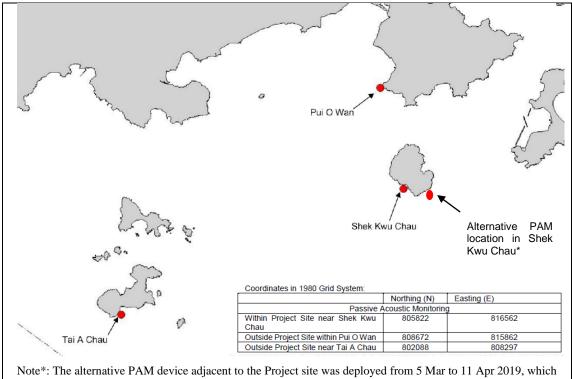

Note\*: The alternative PAM device adjacent to the Project site was deployed from 5 Mar to 11 Apr 2019, which contained a full 37 days acoustic monitoring data set. After the confirmation of loss of the original PAM within the Project site, this data set was proposed to replace that of the original one, as consulted with AFCD accordingly.

#### Figure 6.2 Locations of Passive Acoustic Monitoring

6.2.3 These three detectors will be deployed on-site to carry out 24-hours monitoring for a period listed as **Table 6.2** below during the construction phase.

 Table 6.2 PAM Deployment Period

Season	Months	Deployment Period
Peak Season	December, January, February,	At least 30 days during the peak
	March, April or May	months of porpoise occurrence
		in South Lantau waters

- 6.2.3.1 The automated static porpoise detectors shall detect the presence and number of finless porpoise and Chinese White Dolphins respectively over the deployment period, with the false signal such as boat sonar and sediment transport noise distinguished and filtered out. The detectors shall be deployed and retrieved by professional dive team on the seabed of the three selected location shown in Figure 6.2. During each deployment, the C-POD unit serial numbers as well as the time and date of deployments shall be recorded. Information including the GPS positions and water depth at each of the deployment locations shall also be obtained.
- 6.2.3.2 The diel patterns (i.e. 24-hour activity pattern) of finless porpoise occurrence among the three sites at Shek Kwu Chau, Tai A Chau and Pui O Wan shall be analyzed. Peaks and troughs of finless porpoise occurrence per hour of day would be identified and compared with the results obtained from pre-construction monitoring.
- 6.2.4 Land-based Theodolite Tracking
- 6.2.4.1 The Land-based Theodolite Tracking study would use the same station as in the AFCD monitoring study (same as the baseline monitoring location), which is situated at the southwest side of Shek Kwu Chau (GPS position: 22°11.47' N and 113°59.33' E) as shown in below **Figure 6.3**. The station was selected based on its height above sea level (at least 20 metres), close proximity to shore, and relatively unobstructed views of the entire Project Area to the southwest of Shek Kwu Chau. The height of the Shek Kwu Chau Station established by the HKCRP team is 74.6 m high at mean low water, and only a few hundred metres to the IWMF reclamation site, which is ideal for the purpose for the present behavioural and movement monitoring of finless porpoises as well during construction phase considering there as an un-obstructed vantage point at a height above the Project Site.

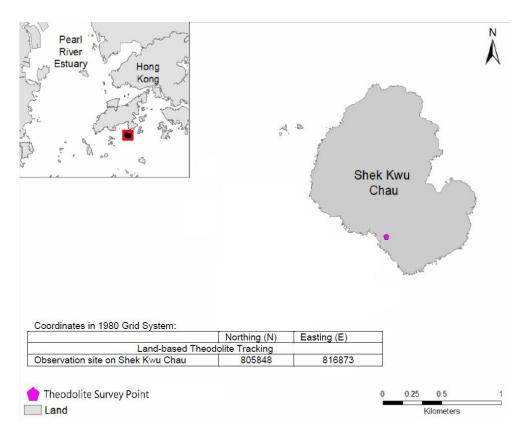


Figure 6.3 Locations of Land-based Theodolite Tracking

During the construction phase, Land-based Theodolite Tracking will be carried out for approximately six hours of tracking for each day of field work for a period listed as **Table 6.3** below, preferably at the initial stage of the construction period (i.e. December 2018 to May 2019).


Table 6.	3 Lan	d-based	Theod	lolite Tı	racking	Survey	Period
						~~~~~	

Season	Months	Survey Period
Peak Season	December, January, February,	30 days during the peak months
	March, April or May	of porpoise occurrence in South
		Lantau waters

- 6.2.4.2 The monitoring period for land-based theodolite tracking will be proposed to be overlapped with the PAM. The monitoring team consists of one experienced theodolite operator and at least two field observers for assistance. To conduct theodolite tracking, the observers will search systematically for Finless Porpoise using the unaided eye and 7 x 50 handheld binoculars on each survey day throughout the study area. When an individual or group of porpoises is located, a theodolite tracking session will be initiated and focal follow methods will be used to track the porpoise(s). Behavioural state data (i.e. resting, milling, travelling, feeding and socializing) shall also be recorded every 5 minutes for the focal individual or group. Positions of porpoises and boats shall be measured using a digital theodolite connected to a laptop computer. This tracking survey was conducted during the peak season between December 2018 and May 2019 for 30 surveys spanning across 15-16 weeks during the peak season to provide good temporal coverage during the initial stage of the construction period.
- 6.3 Specific Mitigation Measures
- 6.3.1 Monitored exclusion zones
- 6.3.1.1 A MMEZ with 250 m distance from silt curtain shall be established during the above situation. If 3 or more construction vessels are required with MMO's duty and operating in close proximity, for the purpose of avoiding accidental entrance to the works area by Marine Mammal, a cluster MMEZ plan will be implemented to form a MMEZ with 250 m distance from the boundary of a work area as indicated in Figure 1 for reference. A team of MMO (i.e. at least two MMOs per day/night shift teams) would be arranged at the out-lying construction vessels to form the cluster MMEZ. The MMEZ serves as a monitoring approach to provide appropriate and immediate actions once finless porpoise or Chinese White Dolphin is sighted within the MMEZ. All MMEZ will be monitored by competent Marine Mammal Observers (MMOs) to be provided by the Environmental Team for the IWMF and trained by the Marine Mammal Monitoring Specialist of the ET who is independent from KSZHJV. The marine mammal observer(s) shall be independent of the construction contractor and shall form part of the Environmental Team and have the power to call-off construction activities.
- 6.3.1.2 According to the Condition 2.25 of the FEP, MMEZ should be implemented during the installation/re-installation/relocation process of floating type silt curtains in order to avoid the accidental entrance and entrapment of marine mammals within the silt curtains. Also, marine construction works expected to produce underwater acoustic disturbance as per Condition 2.27 of the FEP, especially within December and May, would require the implementation of MMEZ, which currently all those specific construction activities have been replaced by less acoustically disturbing construction methods such as Deep Cement Mixing (DCM) and Precast Concrete

Blocks Installation as discussed in Section 5.3 of the Detailed Monitoring Programme on Finless Porpoise, however, MMEZ would also be implemented for precautionary purpose for DCM works.

6.3.1.3 A MMEZ with 250 m distance from the boundary of a work area shall be established during the above situation. A typical MMEZ is indicated in **Figure 6.4** for reference. The MMEZ serves as a monitoring approach to provide appropriate and immediate actions once finless porpoise or Chinese White Dolphin is sighted within the MMEZ. All MMEZ will be monitored by competent Marine Mammal Observers (MMOs) to be provided by the Environmental Team (ET) for the IWMF and trained by the Marine Mammal Monitoring Specialist of the ET who is independent from KSZHJV.

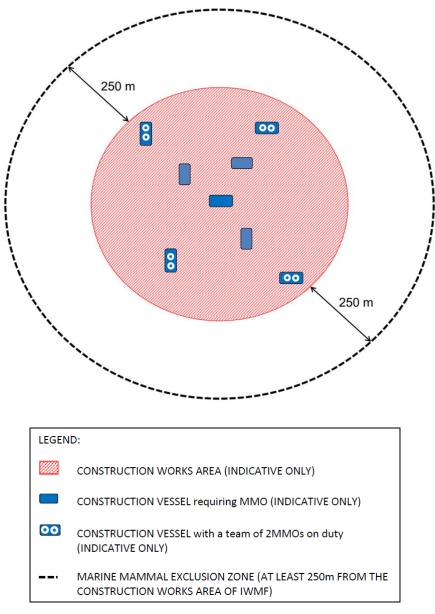

#### Figure 6.4 Illustration of Typical MMEZ

6.3.1.4 Prior to the commencement of construction activity, our MMOs shall ensure the boundary of a marine work area and setting up of the MMEZ for the work area and get access to the monitoring location on a barge or a lookout point where there is no

obstructed views for monitoring the MMEZ during the construction activity. The MMEZ shall be scanned thoroughly by a MMO for any presence of marine mammal e.g. finless porpoise for an initial period of 30 minutes. Construction activity shall only be commenced after the MMO has confirmed that the MMEZ is clear of the marine mammal for the initial period of 30 minutes. The MMO shall then inform the construction superintendent through mobile phone or handheld transceivers to certify the commencement of construction activity. The MMEZ monitoring shall be carried on throughout the period for all active construction activities requiring implementation of MMEZ.

- 6.3.1.5 When any mammal marine, e.g. Finless Porpoise, is detected by the MMO within the MMEZ during construction, the MMO shall inform the construction superintendent immediately through mobile phone or handheld transceivers to cease construction activity within the MMEZ. Construction activity shall not be recommenced until the MMO confirms that the MMEZ is continuously clear of marine mammal for a period of 30 minutes. The MMO shall then inform the construction superintendent through mobile phone or handheld transceivers to certify the re-commencement of construction activity.
- 6.3.1.6 As there could be a number of Contractors working at the same time within a work area for the IWMF project, a full contact list of MMEZ monitoring team members of the ET and the relevant responsible construction superintendents of the Contractor at the site shall be prepared, updated regularly and circulated to all parties involved in the MMEZ monitoring. With a full contact list, our MMOs shall be able to find out the contacts of corresponding persons in case of marine mammal sighting within and near the MMEZ or emergent occurrence of any unpredictable impact on marine mammal.
- 6.3.1.7 If a marine mammal is still observed in close vicinity but outside the MMEZ, the MMO shall inform the construction superintendent about the presence of marine mammal. The MMO shall remain in position and closely observe the movement of the marine mammal as well as searching for the appearance of any other marine mammal within the MMEZ. No matter the marine mammal is observed within or in close vicinity but outside the MMEZ, the construction superintendent or relevant persons shall inform all vessel captains involved in construction activities around the MMEZ to pay special attention of the presence of the marine mammal in order to reduce chance of collision with them. In case of injury or live-stranded marine mammal being found within the MMEZ, the marine mammal observer shall immediately inform the construction superintendent to suspend construction activities within the works area and contact AFCD through "1823" marine mammal stranding hotline.
- 6.3.2 Marine mammal watching plan
- 6.3.2.1 Upon the completion of silt curtain installation/re-installation/relocation, the marine works would be conducted within an enclosed environment within the silt curtain. Subsequently, Visual Inspection of the Waters Surrounded by Silt Curtains (Section 2.1, MMWP) and Regular Inspection of Deployed Silt Curtain (Section 2.2, MMWP) inspection under Marine Mammal Watching Plan would be implemented (where applicable, Marine Mammal Exclusion Zone shall be conducted at the meantime).
- 6.3.2.2 Before commencement of dredging/sand blanket laying work at each designated area, a trained MMO shall check whether position frame silt curtains are ready, well prepared and operated without any obvious damage. Also, the MMO shall confirm the presence of the relevant frontline staff of the main contractor or its sub-

contractors and engineers on board to ensure the effective communication, coordination and implementation of the response plan in relation to any incidents involving marine mammals within the waters surrounded by the position frame type silt curtains and the work areas. Also, there are lookout points at an elevated level on each barge, clear and safe access at the edges of the derrick lighter/ flag-top barge for inspection during dredging/sand blanket laying works, provision of sufficient lighting is required if working at night.

- 6.3.2.3 During the operation, the inspection will be conducted daily. The MMO will walk along the edge of derrick lighter (DL) and flag-top barge (FB) along the position frame silt curtain or proper location without obstacles where appropriate to inspect the position frame silt curtains are maintained in the correct positions with no obvious defects / entanglement and there is no observable muddy water passing through the position frame silt curtain system. Any floating refuse trapped by the silt curtain shall be removed as part of the regular inspection. For night inspection, spotlight will be used to provide sufficient brightness to assist the inspection in dark condition.
- 6.3.2.4 For the re-deployment of the localized silt curtains (frame-type, cage-type or enclosed floating-type silt curtains), MMO will conduct visual inspection to confirm that there is no presence of marine mammal within the localized silt curtains (frametype, cage-type or enclosed floating-type silt curtains). Visual inspection will be conducted every hour by MMO for confirming that there is no marine mammal observed in the surrounding area of the deployed silt curtain during re-deployment of localized silt curtains (frame-type, cage-type or enclosed floating-type silt curtains). The duration will be subject to various conditions, e.g. weather or angle of observation. The works can only commence after confirming that the surrounding waters of the localized silt curtains do not contain any marine mammal. Thereafter, frontline staff, i.e. foremen, site agent, superintendents and engineers will assist our MMO in implementing the plan from the active work fronts within the waters surrounded by the silt curtains throughout the work period. The MMO will conduct regular check to observe the presence of any marine mammal around the localized silt curtain or being trapped by the localized silt curtain daily. The MMOs will also check if the localized silt curtains are in correct positions.
- 6.3.2.5 The MMO shall fill up our Marine Mammal Sighting Record Sheet. After inspection, those records should be kept properly and submitted to the project team. In case there is any marine mammal being found, the MMO should carry out the response actions and communicate with relevant parties to stop and then resume work after the discovered marine mammal leaves. After lifting up and mobilization of silt curtain, the MMO will repeat the procedures of regular and visual inspection until the end of the construction works.
- 6.3.2.6 Each lookout point will have an unobstructed view to waters around the DL and FB. The MMO will move around the DL and FB to establish a clear and unobstructed view as much as they can without compromising the safety concern. When appropriate, the lookout point can be replaced by a proper location if unobstructed view can be assured.
- 6.3.2.7 Installation of caisson No.19 was completed on 18 March 2021, which the reclamation area had been totally enclosed by permanent structure. Floating type silt curtain at marine access was removed on 18 March 2021. No enclosed area shall be formed by deployment of silt curtain for the remaining works programme.

#### 6.4 Results and Observations

#### 6.4.1 Vessel-based Line-transect Survey

6.4.1.1 The monthly surveys were conducted on 2 August 2022. As this is the designated off-peak season (June - November), one survey was completed. A total of 39.0 km on effort (transects only) survey length was completed, 100% of which was conducted at Beaufort Sea State 2 or better (**Table 6.4**). No on-effort finless porpoise sighting was recorded.

Tuble 0.4 Summary of Vesser bused Line transect Survey Linet						
Date	Area*	Beaufort	Effort (km)	Season	Vessel	Effort Type**
2 August 2022	SEL	0	7.3	SUMMER	SEAMAR	D
2 August 2022	SEL	1	31.7	SUMMER	HK	Г

As shown in Figure. 6.1

\*\* P (from AFCD) denotes the ON EFFORT survey on the transect line, not the adjoining passages

- 6.4.1.2 A review of the long term AFCD marine mammal monitoring programme, the EIA and pre-construction baseline monitoring was conducted. Pre-construction baseline monitoring and the EIA were both conducted during the peak porpoise months, Feb-Apr 2018 and Dec-May 2008-09, respectively, and could not be compared directly to August data. The AFCD long term monitoring data can be compared directly to August 2022 Impact Survey results. Impact monitoring data are also included for reference. The August 2018, 2019, 2020 & 2021 impact survey results could be compared directly to August 2022 impact survey results. It was noted that the 2<sup>nd</sup>, 14<sup>th</sup>, 26<sup>th</sup> & 38<sup>th</sup> month of impact monitoring is August 2018, 2019, 2020 & 2021 respectively and these data were included.
- 6.4.1.3 A review of the Beaufort Sea State in August survey conditions between 2009 and 2017 (only data available from AFCD at times of writing; AFCD 20181; 20172; 20163; 20154; 20145; 20136; 20127; 20118; 20109) show that between 9.6% and 60.7% of survey effort has been conducted at Beaufort Sea State 2 or better in the past. For this project in August 2022, 100% of the survey was conducted at Beaufort Sea State 2 or better and, as such, survey conditions surpassed those of previous AFCD surveys.

A review of the porpoise sightings in the survey area for August between 2010 and 2017, no effort was recorded in 2010 and 2014) indicates that it is rare to record sightings in this month. For all weather conditions, and for the eight years data available, zero (0) sighting was recorded in five years (2009, 2011, 2013, 2016 and 2017 conducted by AFCD), one (1) sighting was recorded in one year (2015 conducted by AFCD) and five (5) sighting was recorded in one year (2012 conducted by AFCD). In August 2012, of the five (5) sightings recorded, four (4) were on the same day and three (3) of these were made at the same location and within 27 minutes of each other. Such a cluster of sightings, so close in time and space, is not a usual occurrence. Effort varied between years and sightings varied between 0.0 and 4.2 per 40 km (eqv. Average 0.01 sightings km<sup>-1</sup>). In August 2018, 2019 and 2021, the first three years of impact monitoring, 0 encounter rates were also recorded. The August 2022 encounter rate of 0 is typical of this month.

6.4.1.4 The impacts of the Project on marine mammals as predicted in the EIA were that construction activities would cause individuals to move away from the area. The month of August has shown consistent absence of porpoise prior to project commencement (only 2 years of 8 record sightings). August is considered to be off-

peak season for porpoise, as indicated in the long term monitoring sightings data published by AFCD, although porpoise (and a solitary dolphin) were sighted in the survey area in July 2022 which was unusual. It is noted that there are low numbers of vessels in the area due to Covid-19 restrictions, however, marine construction works, for other projects, are ongoing in the area adjacent to this Project site and are therefore, likely impacting porpoise presence and behaviour.

- 6.4.2 PAM and Land-based Theodolite Tracking
- 6.4.2.1 30 days of PAM surveys were started on 1 May 2019 and completed in the end of May 2019. Multiple PAM systems were deployed at three sites. The PAM system located at the IWMF was lost, however, an alternative data set had been identified. The PAM systems at the two control sites Tai A Chau and Pui O were recovered on 3 August 2019. A summary of marine mammal detections showed that porpoise were recorded every day of deployment at each site, but at varying frequencies. The detailed theodolite result was presented in 17<sup>th</sup> Monthly EM&A report (November 2019) while detailed PAM result was presented in 18<sup>th</sup> Monthly EM&A report (December 2019).
- For the baseline study, the Detection Positive Minutes (DPM) for each site was 6.4.2.2 11,160 (Shek Kwu Chau), 16,089 (Tai A Chau) and 3645 (Pui O Wan), totalling 30,894 DPM across all three sites, compared to DPMs of 4740 (Shek Kwu Chau), 7725 (Tai A Chau) and 23,986 (Pui O Wan), totalling 36,451 DPM, for the impact phase study. As the impact phase study was longer than the baseline study, it is not appropriate to directly compare total counts of DPM, however, the DPM rate (the average number of detections per day) for each site can be more directly compared. During the baseline study, Shek Kwu Chau averaged 338.2 DPM per day compared to 124.8 DPM per day, during the impact phase study. This showed a decrease in the daily average of porpoise detection at Shek Kwu Chau. During the baseline study, Tai A Chau averaged 487.6 DPM per day compared to 179.7 DPM per day, during the impact phase study. This showed a decrease in the daily average of porpoise detection at Tai A Chau. During the baseline study, Pui O Wan averaged 98.5 DPM per day compared to 557.8 DPM per day, during the impact phase study. This showed a significant increase in the daily average of porpoise detections at Pui O Wan.
- 6.4.2.3 Overall, the PAM study showed that porpoise continue to consistently utilise the Shek Kwu Chau habitat immediately adjacent to the IWMF construction activities, although to a lesser degree than that prior to construction activities. In addition, the Pui O Wan site, which is 2.5 km away from the IWMF construction area, was also consistently utilised during the impact phase PAM study. A continued assessment of fine scale habitat use, particularly through PAM which yielded large quantities of data, would allow a more comprehensive assessment of the EIA predictions.
- 6.4.2.4 Theodolite surveys were completed in May 2019. In total, 34 days of theodolite tracking were completed between February and May 2019, comprising 167 hours and 49 minutes of observation. No Chinese white dolphin was observed and only one finless was recorded. The finless porpoise encounter rate was calculated as 0.006 finless porpoise per hour, in all weather conditions.
- 6.4.2.5 A total of 2620 vessels of ten different types were observed and tracked within or in the proximity of the IWMF construction site. These comprised fishing boats (236), speed boats (29), container boats (155), government boats (22), high speed ferries (53), others (13) and IWMF-Related construction platforms (974), tug boats (240),

transportation boats (363), construction boats (531) and approximately 8 buoys were present marking the site boundary.

- 6.4.2.6 The baseline theodolite tracking was conducted immediately prior to and during the site preparation activities of the site. The baseline data records a decrease in porpoise sightings as site preparation activities commenced and notes that the decrease was most likely due to the onset of site preparation activities. The impact theodolite tracking conducted for this study records a marked increase in the number of Project related vessels and platforms and, in agreement with baseline conclusions, shows a concomitant decrease in finless porpoise sightings.
- 6.4.3 Specific Mitigation Measures
- 6.4.3.1 Trainings for the MMO were provided by the ET prior to the monitoring of the Marine Mammal Exclusion Zone (MMEZ) for installation/ re-installation/ relocation process of silt curtains, with a cumulative total of 98 individuals being trained and the training records kept by the ET.

#### 6.4.5 References

- 1. Agriculture, Fisheries and Conservation Department (AFCD) 2018. *Annual Marine Mammal Monitoring Programme April 2017-March 2018*) The Agriculture, Fisheries and Conservation Department, Government of the Hong Kong SAR. <u>http://www.afcd.gov.hk/english/conservation/con\_mar\_chi/con\_mar\_chi\_chi\_html</u>
- 2. Agriculture, Fisheries and Conservation Department (AFCD) 2017. Annual Marine Mammal Monitoring Programme April 2016-March 2017) The Agriculture, Fisheries and Conservation Department, Government of the Hong Kong SAR. http://www.afcd.gov.hk/english/conservation/con\_mar\_chi/con\_mar\_chi\_chi\_html
- 3. Agriculture, Fisheries and Conservation Department (AFCD) 2016. *Annual Marine Mammal Monitoring Programme April 2015-March 2016*) The Agriculture, Fisheries and Conservation Department, Government of the Hong Kong SAR. http://www.afcd.gov.hk/english/conservation/con\_mar\_chi/con\_mar\_chi\_chi\_html
- 4. Agriculture, Fisheries and Conservation Department (AFCD) 2015. Annual Marine Mammal Monitoring Programme April 2014-March 2015) The Agriculture, Fisheries and Conservation Department, Government of the Hong Kong SAR. http://www.afcd.gov.hk/english/conservation/con\_mar\_chi/con\_mar\_chi/con\_mar\_chi\_chi.html
- 5. Agriculture, Fisheries and Conservation Department (AFCD) 2014. *Annual Marine Mammal Monitoring Programme April 2013-March 2014*) The Agriculture, Fisheries and Conservation Department, Government of the Hong Kong SAR. http://www.afcd.gov.hk/english/conservation/con\_mar\_chi/con\_mar\_chi\_chi\_html
- Agriculture, Fisheries and Conservation Department (AFCD) 2013. Annual Marine Mammal Monitoring Programme April 2012-March 2013) The Agriculture, Fisheries and Conservation Department, Government of the Hong Kong SAR. <u>http://www.afcd.gov.hk/english/conservation/con\_mar\_chi/con\_mar\_chi chi i/con\_mar\_chi\_chi.html</u>
- Agriculture, Fisheries and Conservation Department (AFCD) 2012. Annual Marine Mammal Monitoring Programme April 2011-March 2012) The Agriculture, Fisheries and Conservation Department, Government of the Hong Kong SAR. <u>http://www.afcd.gov.hk/english/conservation/con\_mar\_chi/con\_mar\_chi\_chi.html</u>
- 8. Agriculture, Fisheries and Conservation Department (AFCD) 2011. *Annual Marine Mammal Monitoring Programme April 2010-March 2011*) The Agriculture, Fisheries and Conservation Department, Government of the Hong Kong SAR. http://www.afcd.gov.hk/english/conservation/con\_mar\_chi/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_i/con\_mar\_chi\_ch\_
- Agriculture, Fisheries and Conservation Department (AFCD) 2010. Annual Marine Mammal Monitoring Programme April 2009-March 2010) The Agriculture, Fisheries and Conservation Department, Government of the Hong Kong SAR. <u>http://www.afcd.gov.hk/english/conservation/con\_mar\_chi/con\_mar\_chi\_chi.html</u>

# 7. WHITE-BELLIED SEA EAGLE

- 7.1 Monitoring Requirement
- 7.1.1 On Shek Kwu Chau Island, a nest of WBSE is located about 60 m above ground within a hillside shrubland habitat, 130 m in-land from shore, about 550 m away from the proposed reclaimed land, with no human access. 3 phases monitoring programme will be comprised of pre-construction phase, construction phase and operation phase.
- 7.1.2 The Pre-Construction WBSE monitoring was started on 30 January 2018 and the location of WBSE nest was confirmed on 21 February 2018 and it is located at the western part of SKC Island (Figure 7.1). Two adults and two chicks were also recorded on 5<sup>th</sup> March 2018 survey till the end of the Pre-construction monitoring on 15<sup>th</sup> May 2018. Construction Phase monitoring were carried out followed by the commencement of the Construction Phase on 28<sup>th</sup> June 2018.
- 7.2 WBSE Monitoring Parameters, Time, Frequency
- 7.2.1 The objective of the construction phase monitoring should be to verify the utilisation of the area by WBSE, their responses to construction disturbance, as well as the effectiveness of the proposed mitigation measures. Throughout the construction phase, field surveys should be conducted twice per month during their core breeding season (from December to May), and once per month outside their core breeding season (from June to November). The monitoring frequency should be increased to weekly during the incubation period of each year. In order to confirm their foraging ground near the construction site, it is necessary to conduct daily monitoring during the first week of nestling period in each year.
- 7.2.2 Since the location of the WBSE nest was located at the southwest of SKC within the hillside shrubland, it is impossible to observe the eggs during incubation period. Therefore, monitoring with increased frequency during incubation period will be continued until chick was seen in the nest. Daily monitoring of 7-day consecutive monitoring will be carried out once any chick is recorded during the monitoring day. The monitoring schedule during the reporting period is provided in **Appendix C**.
- 7.3 Monitoring Location
- 7.3.1 Since there are no suitable land footings along the coast of SKC, only boat surveys were conducted. On Shek Kwu Chau Island, a nest of WBSE is located about 60 m above ground within a hillside shrubland habitat, 130 m in-land from shore, about 550 m away from the proposed reclaimed land, with no human access.
- 7.4 Monitoring Methodology
- 7.4.1 Information to be collected included feeding, perching/roosting, preening, soaring, flying, nesting and territorial guarding and the time spent on each activity. The responses and reactions to any disturbance to the WBSEs were also recorded and examined in conjunction with the construction noise and/or other events in the vicinity. Other disturbances such as weather condition, or invasion by other fauna species were also recorded.
- 7.4.2 Binocular, scope, camera, lens and GPS device used are summarized as **Table 7.1** below:


Equipment	Quantity
Swarovski EL 8.5 x 42 Binocular	1
Swarovski EL Range 8 x 42 Binocular	1
Swarovski ATX 25-60 x 85 Spotting Scope	1
Canon 1Dx Mark II Camera	1
Canon EF300mm F2.8 Lens with Canon 2x Teleconverter	1
Canon PowerShot G7X Camera	1
Garmin GPSMAP 64S	1

#### Table 7.1 List of Equipment Used during Construction Phase Monitoring

- 7.4.3 If event such as absence of White-bellied Sea Eagle during a whole day of monitoring was found during WBSE monitoring, the actions in accordance with the Event and Action Plan should be carried out according to **Appendix M.**
- 7.5 Results and Observations
- 7.5.1 To verify the utilization of the area by WBSE, their responses to construction disturbance, as well as the effectiveness of the proposed mitigation measures. Since there is no landing point long the western part of SKC, boat survey were used for the monitoring survey. The WBSE, monitoring survey was carried out in the morning. The weather condition of monitoring survey was shown in **Table 7.2**.

Date	Condition	Temperature (°C)
29 <sup>th</sup> August 2022	<ul> <li>Southeast force 3</li> <li>Mainly cloudy with a few showers. Sunny intervals during the day.</li> </ul>	33

- 7.5.2 During the monitoring survey, the two adult WBSEs and one juvenile were recorded staying around the new nest (**Figure 7.1**). No abnormal behaviors of the adults and chick were recorded.
- 7.5.3 All marine works during the monitoring period did not show any effect to the WBSE.
- 7.5.4 No disturbances from anthropogenic activities on the island were recorded during the monitoring survey. However, fishing boats were observed moving close to the shore. No invasion of other fauna species was recorded.
- 7.5.5 There was no sign of using the construction site as a foraging ground.
- 7.5.6 A construction phase monitoring will be continued once per month outside their core breeding season (between June to November) in order to monitor the utilization of the area by WBSE and their responses to construction disturbance.

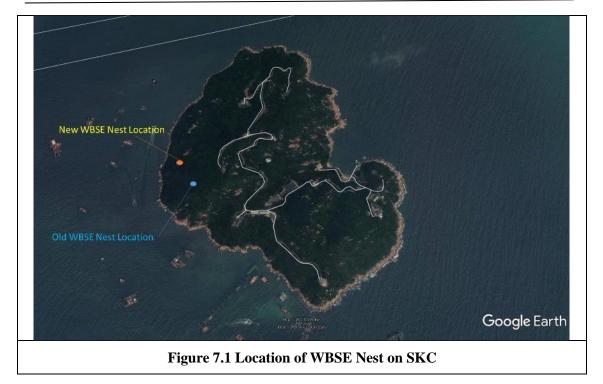

#### 7.5.7 Photo record of WBSE from the survey in this reporting month is shown below:



# 8. SUMMARY OF MONITORING EXCEEDANCE, COMPLAINTS, NOTIFICATION OF SUMMONS AND PROSECUTIONS

8.1 The Environmental Complaint Handling Procedure is shown in Figure 8.1.

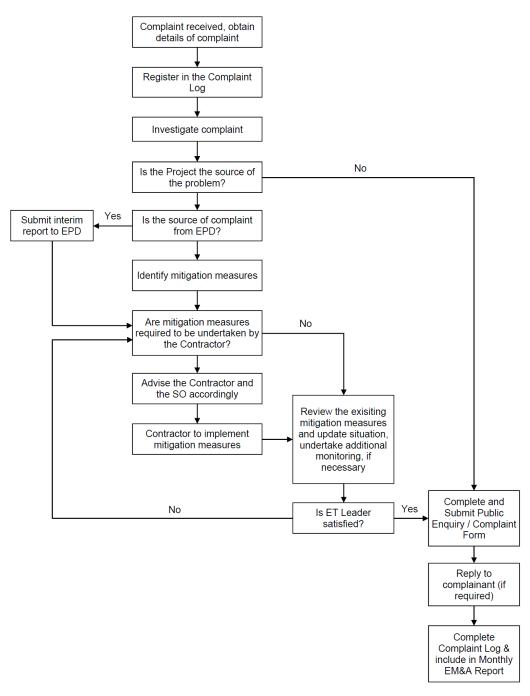


Figure 8.1 Environmental Complaint Handling Procedures

Date	<b>B</b> 1	B2	<b>B3</b>	B4	CR1	CR2	F1A	H1	<b>S1</b>	S2A	<b>S</b> 3	M1
01-08-2022												
03-08-2022												
05-08-2022												
08-08-2022												
10-08-2022												
12-08-2022												
14-08-2022												
16-08-2022												
18-08-2022												
20-08-2022												
22-08-2022												
24-08-2022												
26-08-2022												
29-08-2022												
31-08-2022												
No. of SS Exceedances	0	0	0	0	0	1	0	0	0	0	0	0

### Table 8.1 Summary of SS Compliance Status at Impact Stations (Mid-Ebb Tide)

Note 1: Detailed results are presented in Appendix D

#### Legend:

Begena.
No exceedance of Action Level and Limit Level
Exceedance of Action Level recorded at monitoring station located downstream of the Project based
on dominant tidal flow
Exceedance of Action Level recorded at monitoring station located upstream/unrelated stream
(neither upstream nor downstream, far away) of the Project based on dominant tidal flow
Exceedance of Limit Level recorded at monitoring station located downstream of the Project based
on dominant tidal flow
Exceedance of Limit Level recorded at monitoring station located upstream/unrelated stream of the
Project based on dominant tidal flow
Upstream/unrelated stream station with respect to IWMF Project during the respective tide based on
dominant tidal flow
Downstream station with respect to IWMF Project during the respective tide based on dominant
tidal flow/station within the Project site
NA for measurement
Cancelled due to incident or adverse weather

Date	<b>B</b> 1	B2	<b>B</b> 3	<b>B4</b>	CR1	CR2	F1A	H1	<b>S</b> 1	S2A	<b>S</b> 3	M1
01-08-2022												
03-08-2022												
05-08-2022												
08-08-2022												
10-08-2022												
12-08-2022												
14-08-2022												
16-08-2022												
18-08-2022												
20-08-2022												
22-08-2022												
24-08-2022												
26-08-2022												
29-08-2022												
31-08-2022												
No. of SS Exceedances	0	1	1	1	0	0	0	0	0	0	0	0

Table 8.2 Summary of SS Compliance Status at Impact Stations (Mid-Flood Tide)

Note 1: Detailed results are presented in Appendix D

### Legend:

-	0
	No exceedance of Action Level and Limit Level
	Exceedance of Action Level recorded at monitoring station located downstream of the Project
	based on dominant tidal flow
	Exceedance of Action Level recorded at monitoring station located upstream/unrelated stream
	(neither upstream nor downstream, far away) of the Project based on dominant tidal flow
	Exceedance of Limit Level recorded at monitoring station located downstream of the Project
	based on dominant tidal flow
	Exceedance of Limit Level recorded at monitoring station located upstream/unrelated stream of
	the Project based on dominant tidal flow
	Upstream/unrelated stream station with respect to IWMF Project during the respective tide based
	on dominant tidal flow
	Downstream station with respect to IWMF Project during the respective tide based on dominant
	tidal flow/station within the Project site
	NA for measurement
	Cancelled due to incident or adverse weather

8.2 During the reporting period, one (1) of the general water quality monitoring results of suspended solids (SS) obtained had exceeded Action Level. Three (3) of general water quality monitoring results of SS obtained during the reporting period had exceeded the Limit Level. Investigations were carried out for each exceedance during the reporting period.

8.3 No project-related Action Level or Limit Level exceedance of regular water quality monitoring was recorded from the 1 August 2022 to 31 August 2022 as shown in **Appendix N** and no exceedance of the Action and Limit Levels of the regular WBSE monitoring was recorded during the reporting period.

8.4 The scheduled water quality monitoring event on 10 August 2022 was cancelled due to adverse weather under tropical storm Mulan. A supplementary water quality monitoring event was conducted on 14 August 2022.

8.5 The scheduled water quality monitoring event for flood tide on 24 August 2022 was cancelled due to adverse weather under severe tropical storm Ma-on.

8.6 No notification of summons and prosecution was received in the reporting period.

8.7 Statistics on complaints, notifications of summons and successful prosecutions are summarized in Appendix O.

# 9. EM&A SITE INSPECTION

9.1 Site inspections were carried out on a weekly basis to monitor the implementation of proper environmental pollution control and mitigation measures under the Contract. In the reporting period, site inspections were carried out on 02, 09, 15, 23, 30 August 2022 at the site portions listed in **Table 9.1** below.

Date	Inspected Site Portion	Time
02 August 2022	Portion 1, 1A & 1B (near SKC)	11:30 AM - 12:30 PM
09 August 2022	Portion 8 (TKO sorting area)	10:15 AM - 10:45 AM
15 August 2022	Portion 9 (New site office at Siu Ho Wan)	10:05 AM - 11:00 AM
23 August 2022	Portion 1, 1A & 1B (near SKC)	10:30 AM - 11:30 AM
30 August 2022	Portion 1, 1A & 1B (near SKC)	11:00 AM - 12:00 NM

#### Table 9.1 Site Inspection Record

9.2 One joint site inspection with IEC was carried out on 23 August 2022.

9.3 Environmental deficiencies were observed during weekly site inspection. Key observations during the site inspections of the reporting period are summarized in **Table 9.2**.

Date	Environmental Observations	Follow-up Status
02 August 2022 (Site inspection)	<ul> <li><u>Observation(s) and Recommendation(s)</u></li> <li>1. At caisson 3, soil at the edge of caisson should be removed, stockpile of dusty material should be covered with impervious sheeting.</li> <li>2. No noise emission label was presented on air compressor YAO80.</li> <li>3. The faded NRMM label of generator 3872573 should be replaced.</li> </ul>	<ol> <li>At caisson 3, soil at the edge of caisson had been removed, stockpile of dusty material had been covered with impervious sheeting.</li> <li>Noise emission label had been presented on air compressor YAO80.</li> <li>The faded NRMM label of generator 3872573 had been replaced.</li> </ol>
09 August 2022 (Site inspection) 15 August 2022 (Site inspection)	Observation(s) and Recommendation(s) Nil           Observation(s) and Recommendation(s) Nil	Nil
23 August 2022 (Site inspection)	Observation(s) and Recommendation(s)1. No NRMM label was presented on generator 2329.	1. NRMM label had been posted on generator 2329.
30 August 2022 (Site inspection)	Observation(s) and Recommendation(s)           1. At work area of Hua Hang (華航),           chemical in-use should be placed           on drip tray, the empty bottle           should be stored inside chemical           waste cabinet or separately stored           for recycling.	1. At work area of Hua Hang (華航), the chemical had been separately stored for off-site reuse.

 Table 9.2 Site Observations

Date	<b>Environmental Observations</b>	Follow-up Status
	2. At work area of Hua Hang (華航), stagnant water inside drip tray should be removed.	2. At work area of Hua Hang (華航), stagnant water inside drip tray had been removed.

9.4 The Contractor had rectified all the observations identified during environmental site inspections in the reporting period.

9.5 According to the EIA Study Report, Environmental Permit, contract documents and Updated EM&A Manual, the mitigation measures detailed in the documents are implemented as much as practical during the reporting period. An updated Implementation Status of Environmental Mitigation Measures (EMIS) is provided in **Appendix B**.

# **10. FUTURE KEY ISSUES**

- 10.1 Works to be undertaken in the next reporting month are:
  - Reclamation Area:
    - Reclamation works
    - Installation of Instrumentation
    - Site Investigation works for foundation
    - Foundation works (including Driven H Pile and Socketed H Pile)
    - Pile cap construction
    - Structural steel work
  - Seawall Portion:
    - Installation of Chinese Pod
    - Caisson extension works, from +3mPD to +6mPD, at Seawall A and B
    - Construction of wave wall along the vertical seawall

10.2 Potential environmental impacts arising from the above construction activities are mainly associated with water quality, construction noise, waste management and ecology.

10.3 The key environmental mitigation measures for the Project in the coming reporting period expected to be associated with the construction activities include:

- Reduction of noise from equipment and machinery on-site;
- Sorting, recycling, storage and disposal of general refuse and construction waste;
- Management of chemicals and avoidance of oil spillage on-site, especially under heavy rains and adverse weather;
- Confirmation of the absence of silt content in the rock filling material and the filling work is properly conducted;
- Dust control of exposed soil surface and stockpile of dusty material at reclaimed area;
- Dust suppression measures for exposed earth surface and stockpile of dusty material;
- Site runoff control measure during rainstorm; and
- Dust and noise control of foundation works.

10.4 The tentative schedule of regular construction noise, water quality and ecology monitoring in the next reporting period is presented in **Appendix P**. The regular construction noise, water quality and ecology monitoring will be conducted at the same monitoring locations in the next reporting period.

# **11. CONCLUSION AND RECOMMENDATIONS**

11.1 This 50<sup>th</sup> monthly Environmental Monitoring and Audit (EM&A) Report presents the EM&A works undertaken during the period from 1 August to 31 August 2022, in accordance with the Updated EM&A Manual and the requirement under EP-429/2012/A and FEP-01/429/2012/A.

11.2 Construction noise, water quality, construction waste, marine mammal and WBSE monitoring were carried out in the reporting period. No project-related exceedance of the Action and Limit Level was recorded from 1 August to 31 August 2022.

11.3 Weekly environmental site inspections were conducted during the reporting period. Environmental deficiencies were observed during site inspection and were rectified.

11.4 According to the environmental site inspections performed in the reporting month, the Contractor was reminded to pay attention on the proper storage of the chemicals, presenting valid NRMM and noise emission label on powered mechanical equipment and dust control measure by covering the stockpile of dusty material with impervious sheeting.

11.5 No environmental complaint was received in the reporting period.

11.6 No notification of summon or prosecution was received since commencement of the Contract.

11.7 The ET will keep track of the construction works to confirm compliance of environmental requirements and the proper implementation of all necessary mitigation measures.

Appendix A Master Programme

	Activity Name	Original Duration	Remaining Duration	Activity % Complete	Surrent Start	Gurrent Finish	Late Start	Late Finish	iotai Float	M56 Remarks	Jul 56		Aug 57	Sep 58		Oct 59
gramme for Design ar	nd Construction Works WP6E-M56	2945	1233		22-Nov-17 A	14-Dec-25	23-May-22	14-Dec-25	0				51	30		
y Dates		2945	963		22-Nov-17 A	14-Dec-25	31-Jul-22	14-Dec-25	0					 		
ontractual Key Dates		2821	381			12-Aug-25		12-Aug-25	0					 		
Design and Construction F		2765	325			17-Jun-25		17-Jun-25	0					 		
01-1000 01-1010	Contract Award/Date of Acceptance of Tender Date of Commencement of the Design and the Works	0	0		22-Nov-17 A 15-Dec-17 A		31-Jul-22 31-Jul-22							 		
01-1015(3)(M12)	Original Substantial Completion of the Works	0	0	0%	10 200 11 11	27-Jul-24*	0.00.22	27-Jul-24	0					 		
01-1020	Extended Substantial Completion of The Works	0	0	0%		17-Jun-25*		17-Jun-25	0					 	·····i	
Extension of Time Granted		325				17-Jun-25		17-Jun-25	0					 		
01-1015-1(3)(M12) Operation Phase	Extension of time granted (Claim No.1 to No.72) *Claim No.9 excluded	325 56	325 56		27-Jul-24			17-Jun-25	0					 		
01-1030	Commencement of Operation	0	0		18-Jun-25		18-Jun-25		0					 		
01-1230	Issue Certificate of Completion of the Works (56 days after Substantial C $\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!$	0	0	0%		12-Aug-25*		12-Aug-25	0					 		
Planned Completion Da		806	806		30-Sep-23		30-Sep-23		0					 		
01-1030(5a) 01-1040	Grid Connection Agreement (GCA) Incoming Power Energization to IWMF Substation	0	0	0% 0%		31-Oct-23* 31-Oct-24*		30-Oct-23 31-Oct-24	0					 		
01-1050	Export Power to Grid	0	0	0%		31-Oct-24*		31-Oct-24 31-Oct-24	0					 		
01-1060	Issuance of FS Certificate	0	0	0%		29-Dec-24		17-Dec-24	-12					 		
01-1070	Completion of Civil Provision for Transmission	0	0	0%		30-Sep-23*		30-Sep-23	0					 		
01-1080	Commencement of C1.3.4.11 System Commissioning Test	0	0		22-Feb-25		18-Dec-24		-66					 		
01-1090	Completion of C1.3.4.11 System Commission Test	0	0	0%		19-Mar-25		09-Jan-25	-69					 		
01-1100 01-1110(3)(M15)	Physical Completion of 90 Days Plant Commissioning Test Works Planned Substantial Completion of the Works	0	0	0% 0%		04-Aug-25 25-Aug-25		27-May-25 17-Jun-25	-69 -69					 		
01-1110-1(5a)	Completion of 180 Days for Installation, T&C of CCTV System and Onshoi	0	0	0%		14-Dec-25*		14-Dec-25	-09					 		
Dates of Site Pocession		2742	783		15-Dec-17 A	18-Jun-25	02-Aug-22		0					 		
01-1120	Possession of Portion 1	0	0	100%		15-Dec-17 A		02-Aug-22						 		
01-1130	Possession of Portion 1A	0	0	100%		15-Dec-17 A		02-Aug-22						 		
01-1140	Possession of Portion 1B	0	0	100%	19 Jun 05	15-Dec-17 A		02-Aug-22	0					 		
01-1150 01-1160	Possession of Portion 2 Possession of Portion 3	0	0	0%	18-Jun-25	26-Apr-23	18-Jun-25	15-May-23	19					 		
01-1170	Possession of Portion 4	0	0	0%		26-Apr-23		15-May-23	19					 		
01-1180	Possession of Portion 5	0	0	0%		26-Apr-23		15-May-23	19					 		
01-1190	Possession of Portion 6	0	0	0%	20-Oct-24*		18-Dec-24		59					 		
01-1200	Possession of Portion 7	0	0	100%		05-Jan-18 A		17-Jun-25						 		
01-1210 01-1210(5a)	Possession of Portion 7A Possession of Portion 8	0	0	100%	29-Apr-20 A	07-Dec-18 A	18-Jun-25	17-Jun-25						 		
01-1210(5a) 01-1210-1(M55)	Possession of Portion 9	0	0		10-Jun-22 A		18-Jun-25				)-Jun-22 A			 		
Licence/Permit Applic		2716	1038		15-Dec-17 A	02-Jun-25		17-Jun-25	15					 		
License/Permit for Cons		2626	1038		15-Dec-17 A	02-Jun-25	02-Aug-22	17-Jun-25	15					 		
03-0900	Marine Department Notification for Ground Investigation Works	60	0	100%	15-Dec-17 A	27-Feb-18 A	02-Aug-22	02-Aug-22						 		
03-1000	Marine Department Notification for Construction Works	90	0			05-Jul-18 A	-	-						 		
03-1010	EPD Waste Producer License for Construction Works	60	0			15-Mar-18 A	-	-						 		
03-1020	EPD Chemical Waste Producer Licens e for Construction Works EPD Waste Disposal Licens e for Construction Materials	60 60	0			03-Mar-18 A 15-Jan-18 A	-	-						 		
03-1030	Labour Department Notification of Construction Works	14	0			20-Dec-17 A	-	-						 		
03-1030				100%	15-Dec-17 A	29 Dec 17 A		02 Aug 22						 		
	EPD (ACPO) Notification of Construction Works	14	0		10 200 11 11	20-Dec-17 A	02-Aug-22	02-Aug-22						 		
03-1040	EPD (ACPO) Notification of Construction Works Notice of Commencement to CIC	14 14	0			20-Dec-17 A	02-Aug-22									
03-1040 03-1050 03-1070 03-1080	EPD (ACPO) Notification of Construction Works Notice of Commencement to CIC CNP for Percussive Piling Works	14 0	0	100% 100%	15-Dec-17 A	20-Dec-17 A 31-May-22 A	02-Aug-22	02-Aug-22 17-Jun-25						 		
03-1040 03-1050 03-1070 03-1080 03-1300	EPD (ACPO) Notification of Construction Works Notice of Commencement to CIC CNP for Percussive Piling Works Perpare and Submit EP Application to Clause 1.38 (6) of Spec A	14 0 7	0 0 0	100% 100% 100%	15-Dec-17 A 15-Dec-17 A	20-Dec-17 A 31-May-22 A 21-Dec-17 A	02-Aug-22 02-Aug-22	02-Aug-22 17-Jun-25 02-Aug-22						 		
03-1040 03-1050 03-1070 03-1080 03-1300 03-1310(2)	EPD (ACPO) Notification of Construction Works Notice of Commencement to CIC CNP for Percussive Piling Works Perpare and Submit EP Application to Clause 1.38 (6) of Spec A Dumping Permit Application for Dredging Works	14 0 7 90	0	100% 100% 100% 100%	15-Dec-17 A 15-Dec-17 A 06-Nov-18 A	20-Dec-17 A 31-May-22 A 21-Dec-17 A 21-Feb-19 A	02-Aug-22 02-Aug-22 21-Aug-22	02-Aug-22 17-Jun-25 02-Aug-22 21-Aug-22						 		
03-1040 03-1050 03-1070 03-1080 03-1300 03-1310(2) 03-1360(1)	EPD (ACPO) Notification of Construction Works Notice of Commencement to CIC CNP for Percussive Piling Works Perpare and Submit EP Application to Clause 1.38 (6) of Spec A	14 0 7	0 0 0 0 0	100% 100% 100% 100% 100%	15-Dec-17 A 15-Dec-17 A 06-Nov-18 A	20-Dec-17 A 31-May-22 A 21-Dec-17 A 21-Feb-19 A 25-Jan-19 A	02-Aug-22 02-Aug-22 21-Aug-22 02-Aug-22	02-Aug-22 17-Jun-25 02-Aug-22 21-Aug-22	15							
03-1040 03-1050 03-1070 03-1080 03-1300 03-1310(2) 03-1360(1) 03-1360(2)	EPD (ACPO) Notification of Construction Works Notice of Commencement to CIC CNP for Percussive Piling Works Perpare and Submit EP Application to Clause 1.38 (6) of Spec A Dumping Permit Application for Dredging Works Marine Department Notification for Construction Works (Seawall)	14 0 7 90 90 2120 0	0 0 0 0 0	100% 100% 100% 100% 100% 51.04%	15-Dec-17 A 15-Dec-17 A 06-Nov-18 A 10-Jan-19 A	20-Dec-17 A 31-May-22 A 21-Dec-17 A 21-Feb-19 A 25-Jan-19 A	02-Aug-22 02-Aug-22 21-Aug-22 02-Aug-22	02-Aug-22 17-Jun-25 02-Aug-22 21-Aug-22 02-Aug-22	15 -66					 		
03-1040 03-1050 03-1070 03-1080 03-1300 03-1310(2) 03-1360(1) 03-1360(2) 03-1370(5a) 03-1370_1(M34)	EPD (ACPO) Notification of Construction Works Notice of Commencement to CIC CNP for Percussive Piling Works Perpare and Submit EP Application to Clause 1.38 (6) of Spec A Dumping Permit Application for Dredging Works Marine Department Notification for Construction Works (Seawall) CNP for 24Hrs	14 0 7 90 2120 0 180	0 0 0 0 1038 0 180	100% 100% 100% 100% 51.04% 0%	15-Dec-17 A 15-Dec-17 A 06-Nov-18 A 10-Jan-19 A 07-Mar-19 A 22-Feb-25 31-Jul-22	20-Dec-17 A 31-May-22 A 21-Dec-17 A 21-Feb-19 A 25-Jan-19 A 02-Jun-25 26-Jan-23	02-Aug-22 02-Aug-22 21-Aug-22 02-Aug-22 15-Aug-22 18-Dec-24 02-Sep-22	02-Aug-22 17-Jun-25 02-Aug-22 21-Aug-22 02-Aug-22 17-Jun-25 28-Feb-23	-66 33			31-Jul-22				
03-1040 03-1050 03-1070 03-1080 03-1300 03-1310(2) 03-1360(1) 03-1360(2) 03-1370(5a) 03-1370(5a) 03-1370_1(M34) DG Licence	EPD (ACPO) Notification of Construction Works         Notice of Commencement to CIC         CNP for Percussive Piling Works         Perpare and Submit EP Application to Clause 1.38(6) of Spec A         Dumping Permit Application for Dredging Works         Marine Department Notification for Construction Works (Seawall)         CNP for 24Hrs         EPD Discharge License for System Commissioning         Landscape and Visual Plan	14 0 7 90 2120 0 180 749	0 0 0 0 1038 0 180 749	100% 100% 100% 100% 51.04% 0%	15-Dec-17 A 15-Dec-17 A 06-Nov-18 A 10-Jan-19 A 07-Mar-19 A 22-Feb-25 31-Jul-22 19-Oct-22	20-Dec-17 A 31-May-22 A 21-Dec-17 A 21-Feb-19 A 25-Jan-19 A 02-Jun-25 26-Jan-23 05-Nov-24	02-Aug-22 02-Aug-22 21-Aug-22 02-Aug-22 15-Aug-22 18-Dec-24 02-Sep-22 31-Jul-23	02-Aug-22 17-Jun-25 02-Aug-22 21-Aug-22 02-Aug-22 17-Jun-25 28-Feb-23 17-Dec-24	-66 33 42							
03-1040 03-1050 03-1070 03-1080 03-1300 03-1310(2) 03-1360(1) 03-1360(2) 03-1370(5a) 03-1370(5a) 03-1370_1(M34) DG Licence Day Tank & Fuel Oil Storag	EPD (ACPO) Notification of Construction Works Notice of Commencement to CIC CNP for Percussive Piling Works Perpare and Submit EP Application to Clause 1.38 (6) of Spec A Dumping Permit Application for Dredging Works Marine Department Notification for Construction Works (Seawall) CNP for 24Hrs EPD Discharge License for System Commissioning Landscape and Visual Plan	14 00 70 90 2120 0 180 749 749	0 0 0 0 1038 0 180 749 749	100% 100% 100% 100% 51.04% 0%	15-Dec-17 A 15-Dec-17 A 06-Nov-18 A 10-Jan-19 A 07-Mar-19 A 22-Feb-25 31-Jul-22 19-Oct-22 19-Oct-22	20-Dec-17 A 31-May-22 A 21-Dec-17 A 21-Feb-19 A 25-Jan-19 A 02-Jun-25 26-Jan-23 05-Nov-24 05-Nov-24	02-Aug-22 21-Aug-22 22-Aug-22 02-Aug-22 15-Aug-22 18-Dec-24 02-Sep-22 <b>31-Jul-23</b> <b>31-Jul-23</b>	02-Aug-22 17-Jun-25 02-Aug-22 21-Aug-22 02-Aug-22 17-Jun-25 28-Feb-23 17-Dec-24 17-Dec-24	-66 33							19-Oct-22
03-1040 03-1050 03-1070 03-1080 03-1300 03-1310(2) 03-1360(1) 03-1360(2) 03-1370(5a) 03-1370(5a) 03-1370_1(M34) DG Licence Day Tank & Fuel Oil Storag 03-1400	EPD (ACPO) Notification of Construction Works         Notice of Commencement to CIC         CNP for Percussive Piling Works         Perpare and Submit EP Application to Clause 1.38(6) of Spec A         Dumping Permit Application for Dredging Works         Marine Department Notification for Construction Works (Seawall)         CNP for 24Hrs         EPD Discharge License for System Commissioning         Landscape and Visual Plan	14 0 7 90 2120 0 180 749	0 0 0 0 1038 0 180 749	100% 100% 100% 100% 51.04% 0% 0%	15-Dec-17 A 15-Dec-17 A 06-Nov-18 A 10-Jan-19 A 07-Mar-19 A 22-Feb-25 31-Jul-22 19-Oct-22	20-Dec-17 A 31-May-22 A 21-Dec-17 A 21-Feb-19 A 25-Jan-19 A 02-Jun-25 26-Jan-23 05-Nov-24 05-Nov-24 17-Nov-22	02-Aug-22 21-Aug-22 22-Aug-22 02-Aug-22 15-Aug-22 18-Dec-24 02-Sep-22 <b>31-Jul-23</b> <b>31-Jul-23</b>	02-Aug-22 17-Jun-25 02-Aug-22 21-Aug-22 02-Aug-22 17-Jun-25 28-Feb-23 17-Dec-24 17-Dec-24 29-Aug-23	-66 33 42 42							19-Oct-22
03-1040 03-1050 03-1070 03-1080 03-1300 03-1300 03-1360(1) 03-1360(2) 03-1370(5a) 03-1370(5a) 03-1370(5a) 03-1370(5a) 03-1370(5a) 03-1370(5a) 03-1410 E. Gen RM for IWMF Subs	EPD (ACPO) Notification of Construction Works Notice of Commencement to CIC CNP for Percussive Piling Works Perpare and Submit EP Application to Clause 1.38 (6) of Spec A Dumping Permit Application for Dredging Works Marine Department Notification for Construction Works (Seawall) CNP for 24Hrs EPD Discharge License for System Commissioning Landscape and Visual Plan e (Cat 5) General Building Plans and FSI Provision Design Submission to FSD (Ci DGD and VD Review and Approval of Submission	14 0 7 90 2120 0 180 749 30 180 134	0 0 0 0 1038 0 180 749 30 749 30 180	100% 100% 100% 100% 51.04% 0% 0%	15-Dec-17 A 15-Dec-17 A 06-Nov-18 A 10-Jan-19 A 07-Mar-19 A 22-Feb-25 31-Jul-22 19-Oct-22 19-Oct-22 19-Oct-22 18-Nov-22 17-May-23	20-Dec-17 A 31-May-22 A 21-Dec-17 A 21-Feb-19 A 25-Jan-19 A 02-Jun-25 26-Jan-23 05-Nov-24 05-Nov-24 17-Nov-22 16-May-23 27-Sep-23	02-Aug-22 02-Aug-22 21-Aug-22 02-Aug-22 15-Aug-22 18-Dec-24 02-Sep-22 31-Jul-23 31-Jul-23 30-Aug-23 06-Aug-24	02-Aug-22 17-Jun-25 02-Aug-22 21-Aug-22 02-Aug-22 17-Jun-25 28-Feb-23 17-Dec-24 29-Aug-23 25-Feb-24 17-Dec-24	-66 33 42 42 285 285 285 447							
03-1040 03-1050 03-1070 03-1080 03-1300 03-1310(2) 03-1360(1) 03-1360(2) 03-1370(5a) 03-1370(5a) 03-1370(5a) 03-1370, I(M34) 06 Licence Day Tank & Fuel Oil Storag 03-1400 03-1410 E. Gen RM for IWMF Subs 03-1420	EPD (ACPO) Notification of Construction Works         Notice of Commencement to CIC         CNP for Percussive Piling Works         Perpare and Submit EP Application to Clause 1.38 (6) of Spec A         Dumping Permit Application for Dredging Works         Marine Department Notification for Construction Works (Seawall)         CNP for 24Hrs         EPD Discharge License for System Commissioning         Landscape and Visual Plan         OGeneral Building Plans and FSI Provision Design Submission to FSD (CiDGD and VD Review and Approval of Submission         station         DGD Compliance Inspection, Defects Rectification and Re-inspection	14 0 7 90 2120 0 180 749 30 180 134 60	0 0 0 0 1038 0 180 749 30 749 30 180 180 134 60	100% 100% 100% 100% 51.04% 0% 0% 0%	15-Dec-17 A 15-Dec-17 A 06-Nov-18 A 10-Jan-19 A 07-Mar-19 A 22-Feb-25 31-Jul-22 19-Oct-22 19-Oct-22 18-Nov-22 17-May-23 17-May-23	20-Dec-17 A 31-May-22 A 21-Dec-17 A 21-Feb-19 A 25-Jan-19 A 02-Jun-25 26-Jan-23 05-Nov-24 05-Nov-24 17-Nov-22 16-May-23 27-Sep-23 15-Jul-23	02-Aug-22 02-Aug-22 21-Aug-22 02-Aug-22 15-Aug-22 18-Dec-24 02-Sep-22 <b>31-Jul-23</b> <b>31-Jul-23</b> <b>30-Aug-23</b> <b>06-Aug-24</b> 06-Aug-24	02-Aug-22 17-Jun-25 02-Aug-22 21-Aug-22 02-Aug-22 17-Jun-25 28-Feb-23 17-Dec-24 29-Aug-23 25-Feb-24 17-Dec-24 04-Oct-24	-66 33 42 42 285 285 285 447 447							
03-1040 03-1050 03-1070 03-1080 03-1300 03-1310(2) 03-1360(2) 03-1360(2) 03-1370(5a) 03-1370(5a) 03-1370(5a) 03-1370(1M34) OG Licence Day Tank & Fuel Oil Storag 03-1400 03-1410 E. Gen RM for IWMF Subs 03-1420 03-1430	EPD (ACPO) Notification of Construction Works         Notice of Commencement to CIC         CNP for Percussive Piling Works         Perpare and Submit EP Application to Clause 1.38 (6) of Spec A         Dumping Permit Application for Dredging Works         Marine Department Notification for Construction Works (Seawall)         CNP for 24Hrs         EPD Discharge License for System Commissioning         Landscape and Visual Plan         CoED and VD Review and Approval of Submission         Station         DGD Compliance Inspection, Defects Rectification and Re-inspection         VD Compliance Inspection, Defects Rectification and Re-inspection	14 0 7 90 2120 0 180 749 30 180 134 60 60	0 0 0 0 1038 0 180 749 30 749 30 180 180 134 60 60	100% 100% 100% 100% 51.04% 0% 0% 0% 0%	15-Dec-17 A 15-Dec-17 A 06-Nov-18 A 10-Jan-19 A 07-Mar-19 A 22-Feb-25 31-Jul-22 19-Oct-22 19-Oct-22 18-Nov-22 17-May-23 16-Jul-23	20-Dec-17 A 31-May-22 A 21-Dec-17 A 21-Feb-19 A 25-Jan-19 A 02-Jun-25 26-Jan-23 05-Nov-24 05-Nov-24 05-Nov-24 16-May-23 15-Jul-23 13-Sep-23	02-Aug-22 02-Aug-22 21-Aug-22 02-Aug-22 15-Aug-22 18-Dec-24 02-Sep-22 <b>31-Jul-23</b> <b>31-Jul-23</b> <b>31-Jul-23</b> <b>30-Aug-23</b> <b>06-Aug-24</b> 05-Oct-24	02-Aug-22 17-Jun-25 02-Aug-22 21-Aug-22 02-Aug-22 17-Jun-25 28-Feb-23 17-Dec-24 17-Dec-24 29-Aug-23 25-Feb-24 17-Dec-24 04-Oct-24 03-Dec-24	-66 33 42 42 285 285 285 447 447 447							
03-1040 03-1050 03-1070 03-1080 03-1300 03-1310(2) 03-1360(1) 03-1360(2) 03-1370(5a) 03-1370_1(M34) DG Licence Day Tank & Fuel Oil Storag 03-1400 03-1420 03-1420 03-1440	EPD (ACPO) Notification of Construction Works         Notice of Commencement to CIC         CNP for Percussive Piling Works         Perpare and Submit EP Application to Clause 1.38 (6) of Spec A         Dumping Permit Application for Dredging Works         Marine Department Notification for Construction Works (Seawall)         CNP for 24Hrs         EPD Discharge License for System Commissioning         Landscape and Visual Plan         Department Notification for Submission to FSD (C:         Defeneral Building Plans and FSI Provision Design Submission to FSD (C:         DGD and VD Review and Approval of Subm ission         station         DGD Compliance Inspection, Defects Rectification and Re-inspection         VD Compliance Inspection, Defects Rectification and Re-inspection         Issue of DG License	14 0 7 90 2120 0 180 749 30 180 134 60 60 14	0 0 0 0 1038 0 180 749 30 749 30 180 180 134 60 60 60	100% 100% 100% 100% 51.04% 0% 0% 0% 0%	15-Dec-17 A 15-Dec-17 A 06-Nov-18 A 10-Jan-19 A 22-Feb-25 31-Jul-22 19-Oct-22 19-Oct-22 19-Oct-22 18-Nov-22 17-May-23 17-May-23 16-Jul-23 14-Sep-23	20-Dec-17 A 31-May-22 A 21-Dec-17 A 21-Feb-19 A 25-Jan-19 A 02-Jun-25 26-Jan-23 05-Nov-24 05-Nov-24 17-Nov-22 16-May-23 15-Jul-23 15-Jul-23 13-Sep-23 27-Sep-23	02-Aug-22 02-Aug-22 21-Aug-22 02-Aug-22 15-Aug-22 18-Dec-24 02-Sep-22 31-Jul-23 31-Jul-23 30-Aug-23 06-Aug-24 05-Oct-24 04-Dec-24	02-Aug-22 17-Jun-25 02-Aug-22 21-Aug-22 02-Aug-22 17-Jun-25 28-Feb-23 17-Dec-24 17-Dec-24 04-Oct-24 03-Dec-24 17-Dec-24	-66 33 42 42 285 285 285 447 447							
03-1040 03-1050 03-1070 03-1080 03-1300 03-1310(2) 03-1380(1) 03-1360(2) 03-1370(5a) 03-1370_1(M34) DG Licence Day Tank & Fuel Oil Storag 03-1400 03-1410 E. Gen RM for iWMF Subs 03-1420 03-1430	EPD (ACPO) Notification of Construction Works         Notice of Commencement to CIC         CNP for Percussive Piling Works         Perpare and Submit EP Application to Clause 1.38 (6) of Spec A         Dumping Permit Application for Dredging Works         Marine Department Notification for Construction Works (Seawall)         CNP for 24Hrs         EPD Discharge License for System Commissioning         Landscape and Visual Plan         Department Notification for Submission to FSD (C:         Defeneral Building Plans and FSI Provision Design Submission to FSD (C:         DGD and VD Review and Approval of Subm ission         station         DGD Compliance Inspection, Defects Rectification and Re-inspection         VD Compliance Inspection, Defects Rectification and Re-inspection         Issue of DG License	14 0 7 90 2120 0 180 749 30 180 134 60 60	0 0 0 0 1038 0 180 749 30 749 30 180 180 134 60 60 60	100% 100% 100% 100% 51.04% 0% 0% 0% 0% 0%	15-Dec-17 A 15-Dec-17 A 06-Nov-18 A 10-Jan-19 A 22-Feb-25 31-Jul-22 19-Oct-22 19-Oct-22 19-Oct-22 18-Nov-22 17-May-23 17-May-23 16-Jul-23 14-Sep-23	20-Dec-17 A 31-May-22 A 21-Dec-17 A 21-Feb-19 A 25-Jan-19 A 02-Jun-25 26-Jan-23 05-Nov-24 05-Nov-24 17-Nov-22 16-May-23 27-Sep-23 13-Sep-23 27-Sep-23 05-Nov-24	02-Aug-22 02-Aug-22 21-Aug-22 02-Aug-22 15-Aug-22 18-Dec-24 02-Sep-22 31-Jul-23 31-Jul-23 30-Aug-23 06-Aug-24 05-Oct-24 04-Dec-24	02-Aug-22 17-Jun-25 02-Aug-22 21-Aug-22 02-Aug-22 17-Jun-25 28-Feb-23 17-Dec-24 29-Aug-23 25-Feb-24 17-Dec-24 04-Oct-24 03-Dec-24 17-Dec-24 17-Dec-24 17-Dec-24	-66 33 42 285 285 447 447 447 447							
03-1040 03-1050 03-1070 03-1080 03-1300 03-1310(2) 03-1360(1) 03-1360(2) 03-1370(5a) 03-1370(5a) 03-1370_1(M34) DG Licence Day Tank & Fuel Oil Storag 03-1400 03-1410 E. Gen RM for IWMF Subs 03-1420 03-1440 All E. Gen Rm (Other than	EPD (ACPO) Notification of Construction Works Notice of Commencement to CIC CNP for Percussive Piling Works Perpare and Submit EP Application to Clause 1.38 (6) of Spec A Dumping Permit Application for Dredging Works Marine Department Notification for Construction Works (Seawall) CNP for 24Hrs EPD Discharge License for System Commissioning Landscape and Visual Plan re (Cat 5) General Building Plans and FSI Provision Design Submission to FSD (Ci DGD and VD Review and Approval of Submission station DGD Compliance Inspection, Defects Rectification and Re-inspection Issue of DG License IWMF Substation)	14 0 7 90 2120 0 180 749 30 180 180 180 134 60 60 14	0 0 0 0 1038 0 180 749 30 180 180 180 180 180 184 60 60 114	100% 100% 100% 100% 51.04% 0% 0% 0% 0% 0%	15-Dec-17 A 15-Dec-17 A 06-Nov-18A 10-Jan-19A 22-Feb-25 31-Jul-22 19-Oct-22 19-Oct-22 18-Nov-22 17-May-23 16-Jul-23 14-Sep-23 25-Jun-24	20-Dec-17 A 31-May-22 A 21-Dec-17 A 21-Feb-19 A 25-Jan-19 A 02-Jun-25 26-Jan-23 05-Nov-24 17-Nov-22 16-May-23 16-May-23 15-Jul-23 13-Sep-23 27-Sep-23 05-Nov-24 23-Aug-24	02-Aug-22 02-Aug-22 21-Aug-22 02-Aug-22 15-Aug-22 18-Dec-24 02-Sep-22 <b>31-Jul-23</b> <b>31-Jul-23</b> <b>31-Jul-23</b> <b>30-Aug-23</b> <b>06-Aug-24</b> 06-Aug-24 06-Aug-24 06-Aug-24	02-Aug-22 17-Jun-25 02-Aug-22 21-Aug-22 02-Aug-22 17-Jun-25 28-Feb-23 17-Dec-24 29-Aug-23 25-Feb-24 17-Dec-24 04-Oct-24 03-Dec-24 17-Dec-24 17-Dec-24 17-Dec-24	-66 33 42 285 285 447 447 447 447 447							

3-Month Rolling	Programme	(July	2022)
-----------------	-----------	-------	-------

♦ ♦ Milestone

	Activity Name	Original Duration	Remaining Duration	Activity % Current Start Complete	Current Finish	Late Start	Late Finish	Total Float	M56 Remarks		Jul 56	Aug 57	2022	Sep 58	Oct 59
_Fuel Oil System		134			03-Jun-24	06-Aug-24		197							
<pre>03-3850 03-3860</pre>	DGD Compliance Inspection, Defects Rectification and Re-inspection VD Compliance Inspection, Defects Rectification and Re-inspection	60 60	60 60	0% 22-Jan-24 0% 22-Mar-24	21-Mar-24 20-May-24	06-Aug-24 05-Oct-24	04-Oct-24 03-Dec-24	197 197							
03-3870	Issuance of DG License	14			,	03-001-24 04-Dec-24		197							
Chemical Stores (all Cat)		749	749	19-Oct-22	05-Nov-24	18-Jan-24	17-Dec-24	42							
03-1480	Plans and FSI Provision Design Submission to FSD	21	21		08-Nov-22		07-Feb-24	456							19-Oct-22
03-1490 03-1500	DGD and VD Review and Approval of Submission DGD Compliance Inspection, Defects Rectification and Re-inspection	180 60	180 60	0% 09-Nov-22 0% 25-Jun-24	07-May-23 23-Aug-24	08-Feb-24 06-Aug-24	05-Aug-24	456							
03-1510	VD Compliance Inspection, Defects Rectification and Re-inspection	60	60	0% 24-Aug-24	-		03-Dec-24	42							-
03-1520	Issuance of DG License	14	14	0% 23-Oct-24	05-Nov-24	04-Dec-24	17-Dec-24	42							
Fire Services Installat	ions (FSI) Certificatie	1759	796		22-Dec-24	19-Oct-22	17-Dec-24	-5							
Fire Engineering Report 505-3000	Perparation and Submission of Fire Engineering Report to FSD	883 550	-				19-Oct-22 19-Oct-22								
05-3000	Approval of Fire Engineering Report by FSD	000	0		21-Jun-22 A		19-Oct-22			Fire Engineering Re	eport by FSD				
Fire Services Installation		796	-		22-Dec-24			-5							
03-1555-1(5a)	Approval of General Building Plans and FSI Provision Design Submission	0	0	0%	18-Oct-22		19-Oct-22	1							Approva
03-1560	Completion of FSI Installations	0	0	0%	10-Sep-24		05-Sep-24	-5							
03-1570	Application for FSI inspection	15 15			25-Sep-24 10-Oct-24	06-Sep-24 21-Sep-24	· ·	-5							
03-1580	FSD Process Application FSD Initial Inspection	15	15	0% 26-Sep-24	24-Oct-24	21-Sep-24 06-Oct-24	19-Oct-24	-5		+					
03-1600	Defect Rectifications	30	30		23-Nov-24	20-Oct-24	18-Nov-24	-5		1					
03-1610	Request for FSD Reinspection	15	15	0% 24-Nov-24	08-Dec-24	19-Nov-24	03-Dec-24	-5							
03-1620	FSD Reinspection	14				04-Dec-24		-5							
Fire Services Installation 03-3880	Certificate Inspection for IWMF Sub-Station Completion of FSI Installations for IWMF Sub-Station	103 0	103 0	26-Jul-23 0%	06-Nov-23 26-Jul-23	19-Sep-23	31-Dec-23 19-Sep-23	56 56							
03-3890	Application for FSI inspection	15	-		10-Aug-23	20-Sep-23		56							
03-3900	FSD Process Application	15			25-Aug-23	05-Oct-23	19-Oct-23	56							
03-3910	FSD Initial Inspection	14	14	0% 25-Aug-23	08-Sep-23	20-Oct-23	02-Nov-23	56							
03-3920	Defect Rectifications	30	30		08-Oct-23		02-Dec-23	56							
03-3930	Request for FSD Reinspection	15	15		23-Oct-23			56							
03-3940	FSD Reinspection Specified Processes) License	14 2046	14 614		06-Nov-23	18-Dec-23 08-Dec-22		56 10							
03-1730(3)	Early Engagement With EPD SP Licensing Department for Information e:	600	014	100% 27-Dec-18 A	U U		Ŭ	10							
03-1740(3)	Document preparation for SP License Application (upon consent of releve	60	60	0% 28-Nov-22	-	08-Dec-22		10							
03-1750(3)	SP License Application Submissions and review by EPD	300	300	0% 27-Jan-23	22-Nov-23	06-Feb-23	02-Dec-23	10							
03-1760(3)	Public Consultation	60	60	0% 23-Nov-23	21-Jan-24	03-Dec-23		10							
03-1780(3)	Preparation and Submission for Trial Plan	90 90	90 90	0% 22-Jan-24	20-Apr-24 19-Jul-24		30-Apr-24	10							
03-1790(3) 03-1830(3)	Review and approval of Trial Plan by EPD Licensing Department Issuance of SP License	90		0% 21-Apr-24 0% 20-Jul-24	02-Aug-24	01-May-24 30-Jul-24	12-Aug-24	10							
Boilers and Pressure		2028	810	17-Aug-18 A	-	31-Jan-23	-	-66							
03-1840(3)	Early Engagement with LD Licensing Unit for Information exchange	180	0	100% 14-Nov-18 A	30-Nov-18 A	05-Dec-23	05-Dec-23								
03-1850(3)	Employment of Recognized Inspection Body for maker's certificate	90	0	100% 17-Aug-18 A	05-Dec-18 A	31-Jan-23	31-Jan-23								
03-1860(3)	Employment of Registered Examiner	90	60		28-Sep-22	05-Dec-23	02-Feb-24	492							28-Sep-22, Employment of Registe
03-1870(3) 03-1880(3)	Prepare boiler fabrication inspection plan Submission of boiler fabrication inspection plan for License Application	60 21	60 21	0% 29-Sep-22 0% 11-Jun-23	27-Nov-22 01-Jul-23	03-Feb-24 03-Apr-24	· ·	492 297						29-Sep-22	
03-1890(3)	Completion of Boiler off-site fabrication	0	0	0%	01-Jul-23	03-Api-24	23-Apr-24	297							
03-1900(3)	Completion of Boiler off-site inspection before delivery	0	0	0%	01-Jul-23		23-Apr-24	297							
03-1910(3)	Completion of on-site boiler installation	0	0	0%	04-Jul-23		23-Apr-24	294							
03-1920(3)	Completion of on-site boiler inspection	0	0	0%	12-Sep-23		23-Apr-24	224							
03-1930(3)	Submit inspection report and associated document to LD	90	90		13-Jun-24	24-Apr-24		39							
03-1940(3) Lifts or Escalators	Issuance of Boiler License	21 427	21 427	0% 27-Sep-24 22-Mar-24	17-Oct-24	23-Jul-24 09-May-24	12-Aug-24 17-Jun-25	-66 26							
03-1060	Notification of Commencement of Works Involving Installation or Mainten;	0	0	0% 22-Mar-24	LL Muy LJ	09-May-24		48							
03-1060-1(6D)	Application for a Use Permit of a Lift or Escalator before putting into Use a	180	180	0% 24-Nov-24	22-May-25	20-Dec-24	17-Jun-25	26		<b>_</b>					
Ventilating System Lie		110	110		_	29-Aug-24		-12							
03-1650	Completion of Ventilating System	0	0	0%	10-Sep-24		29-Aug-24	-12							
03-1660	Application for Inspection	15		· ·	· · ·	30-Aug-24		-12							
03-1670 03-1680	FSD VD Inspection Defect Rectifications	14 30	14 30		09-Oct-24 08-Nov-24	14-Sep-24 28-Sep-24	27-Sep-24 27-Oct-24	-12							
03-1690	Request for VD Reinspection	15	15			28-Oct-24		-12							
03-1700	Hot Smoke Test	15	15		08-Dec-24	12-Nov-24	26-Nov-24	-12		I					
03-1710	VD Reinspection	15	15	0% 24-Nov-24	08-Dec-24		26-Nov-24	-12		[					
03-1720	Issue Letter of Compliance	21		0% 09-Dec-24		27-Nov-24		-12							
General Submission		1108	150	31-May-22		03-Aug-22		3							
	bmission and Approval	1108	150			03-Aug-22		3							
BEAM Plus Assessment		1108	150	31-May-22	27-Dec-22	03-Aug-22	30-Dec-22	3							
<b>Ionth Rolli</b> e 2 of 15	ng Programme (July 2022)								<ul><li>Remaining Work</li><li>Actual Work</li><li>Critical Remaining</li></ul>	•	<ul><li>Actual Mileston</li><li>Critical Milestor</li></ul>				

	Activity Name	Original Duration	Remaining Duration	Activity % Complete	Current Start	Current Finish	Late Start	Late Finish	Total Float M56 Remarks	Jul	Aug 20
04-1500-1(1)	Provisional Assessment	1108	150	86.46%	31-May-22	27-Dec-22*	03-Aug-22	30-Dec-22	3	56	57
Design Submissions		1647	305		27-Nov-18 A	31-May-23	10-Jul-22	20-Sep-23	112		
General Building Plan		130	60		22-Apr-22 A		20-Sep-22	19-Oct-22	21		
04-1690(M46)	ACC Equipment Structure	30	30		31-Jul-22	29-Aug-22	20-Sep-22	19-Oct-22	51	31-Jul-22	
04-1730 AIP Design Package Subr	Weighbridge	60 1594	30 252	0%	22-Apr-22 A		20-Sep-22 15-Jul-22	19-Oct-22 08-Apr-23	21		
AIP Process and Layout Des		96	35			03-Sep-22	13-Sep-22		44		
MSW treatment process des	ign for mechanical treatment (2.1.02)	96	35		30-Apr-22 A	03-Sep-22	13-Sep-22	17-Oct-22	44		
05-1090	Mechanical Treatment Plant	96	35		30-Apr-22 A	· · ·	13-Sep-22		44		
AIP Ground Treatment, Reclaration 05-2970	ama tion, Sea wall, Breakwater, Berth (2.2) Onshore crane Facility (2.2.11)	424 90	19 19		31-May-21 30-Apr-22 A	18-Aug-22	15-Jul-22 15-Jul-22	02-Aug-22 02-Aug-22	-16 -16		Onshore crane
05-2980	Onshore vessel power supply system (2.2.12)	135	10		· ·	09-Aug-22	24-Jul-22	02-Aug-22	-7		Onshore vessel power supp
AIP Incineration Plant Build		1402	60		-	28-Sep-22			78		
General Layout Drawings ar		1402	60			28-Sep-22	01-Aug-22		40		
05-1210	Process Building & Wastewater Treatment Plant (2.3.00.01 & 2.5.00.01)	105	50		31-Aug-21 A		01-Aug-22	· · ·	1	21 14 00	
<ul> <li>05-1220</li> <li>05-2020</li> </ul>	ACC Equipment Structure Administration Building and Viewing Gallery (2.7.00)	60 135	60 50		31-Jul-22 27-Nov-18 A	28-Sep-22	09-Sep-22 01-Aug-22	19-Sep-22	40	31-Jul-22	
05-2640	IWMF Site Wide Architectural Details (2.9.00)	105	50		31-Aug-21 A	· ·	01-Aug-22	· · ·	1		
05-3020	Site Master Layout Plan and Plant Layout (2.1.06)	105	50		31-Jul-21 A	· ·	01-Aug-22		1		
Coperation Management Sys		121	30		14-Feb-22 A	29-Aug-22	19-Aug-22	<u> </u>	23		
<b>05-2250</b>	Design of the Air Quality Monitoring Stations (2.9.01)	60	30		01-Jun-22 A	-	19-Aug-22	· ·	19		
05-3840-1(M22)	Automatic Traffic Control System (ATCS) (2.10.06.12)	90	30		14-Feb-22 A	-	23-Aug-22	· · · ·	23		
Building services design (e 05-1550	xcluding fire services installation design) (2.3.06) Electrical Services and Lighting	1366 150	60 60		02-Jan-19 A	28-Sep-22 28-Sep-22	21-Aug-22 09-Oct-22	07-Dec-22	78		
05-1600	ELV (7 Packages)	135	60		28-Feb-19A	· ·	09-Oct-22	07-Dec-22	70		
<b>05-1610</b>	Lifts and Escalators (2 Packages)	135	60	5%	01-Nov-19A	28-Sep-22	17-Oct-22	15-Dec-22	78		
<b>—</b> 05-1770	Vehicle & Container Wash System	60	60	0%	31-Jul-22	28-Sep-22	26-Aug-22	24-Oct-22	26	31-Jul-22	
05-1770-1(M20)	Water Cannon System	135	60		31-Aug-19 A		21-Aug-22	19-Oct-22	21		
AIP Fire services installation Process Building (2.3.05.01		135 135	30 30		09-Jul-19 A	17-Nov-22 17-Nov-22	20-Oct-22 20-Oct-22	18-Nov-22 18-Nov-22	1		
Process Building (2.3.03.01)	Fire Systems	105	30	5%	09-Jul-19 A		20-Oct-22	18-Nov-22	1		
<b>05-1530</b>	FS schematics	135	30	5%	09-Jul-19 A	17-Nov-22	20-Oct-22	18-Nov-22	1		-
AIP Mechanical Treatment P		1298	180			26-Jan-23	18-Aug-22		56		
05-1670	Electrical and instrumentation works design (2.4.03)	180	180		31-Jul-22*	26-Jan-23	25-Sep-22		56	31-Jul-22*	
05-1680 05-1690	Mechanical works design (2.4.04) Fire services installation design (2.4.05) (3 Packages)	180 135	180 60		31-Jul-22*	26-Jan-23 28-Sep-22	25-Sep-22 20-Oct-22	23-Mar-23 18-Dec-22	56 81	31-Jul-22*	
	xcluding fire services installation design (2.4.05) (3 Factages)	135	135	3%	31-Jul-22	12-Dec-22		30-Dec-22	18		
05-1730	Plumbing	90	90	0%	31-Jul-22	28-Oct-22	30-Aug-22		30	31-Jul-22	
<b>—</b> 05-1740	Drainage	90	90	0%	31-Jul-22	28-Oct-22	30-Aug-22	27-Nov-22	30	31-Jul-22	?
05-1750	ELV	90	90		31-Jul-22	28-Oct-22	09-Sep-22		40	31-Jul-22	
<b>05-1760</b>	Lifts	135	135	0%	31-Jul-22	12-Dec-22	18-Aug-22		18	31-Jul-22	
AIP Wastewater Treatment P 05-2790	Fire services installation design (2.5.05)	135 135	60	5%	09-Jul-19 A	17-Dec-22 17-Dec-22	20-Oct-22 20-Oct-22	18-Dec-22	1		
AIP Water Treatment Plant B	÷ 、 ,	1248	60			28-Sep-22			51		
05-1910	Foundation design (2.6.01)	60	60	0%	31-Jul-22	28-Sep-22	01-Aug-22		1	31-Jul-22	?
05-1920	Structural design (2.6.02)	90	60		31-Oct-21 A	· ·	31-Aug-22		31		
05-1950	Fire services installation design (2.6.05) (3 Packages)	105	60		09-Jul-19 A		21-Aug-22		21		
Building services design (e 05-1990	xcluding fire services installation design) (2.6.06) Plumbing	135 135	60 60		30-Apr-19A 30-Apr-19A	· · · · ·	20-Sep-22 20-Sep-22		51 51		
05-2000	Drainage	135	60		30-Apr-19A		20-Sep-22		51		
AIP Admin istration Building	(2.7)	227	60		31-Oct-19 A	28-Sep-22	02-Oct-22	18-Dec-22	81		
<b>05-2060</b>	Fire services installation design (3 Packages) (2.7.04)	135	60		31-Oct-19 A			18-Dec-22	81		
	xcluding fire services installation design) (2.7.05) Lifts and Escalators	135	60		31-Jan-20 A		02-Oct-22		63		
05-2130     AIP IWMF Substation (2.8)	LITS and Escalators	135 135	60 0		31-Jan-20 A	28-Sep-22	02-Oct-22 07-Oct-22		63 69		
05-2190	Fire services installation design (2.8.05) (2 Packages)	135	0		19-Feb-19A		07-Oct-22		69		31-Jul-22, Fire services installation des
AIP Chimney		90	90		31-Jul-22	28-Oct-22	20-Oct-22	17-Jan-23	81		
05-7390	Fire services installation design	90	90			28-Oct-22	20-Oct-22		81	31-Jul-22	2
	Associated Structures Foundation	105 105	60 60			28-Sep-22 28-Sep-22	26-Aug-22 26-Aug-22		<u>26</u> 26		
Building services design (e 05-7090	xcluding fire services installation design) Electrical Services and Lighting	105	60 60			28-Sep-22 28-Sep-22	26-Aug-22 26-Aug-22		26		
AIP Roads and Utilities (2.10		1204	75				04-Aug-22		34		
Water supply system design	on the Artificial Island (2.10.04)	1049	75		30-Nov-19 A	13-Oct-22	03-Sep-22	16-Nov-22	34		
05-2360	Water Tanks (2.10.04.05)	75	75			13-Oct-22	03-Sep-22		34	31-Jul-22	
05-2370	External FS Systems (2.10.04.06)	105	60	5%	30-Nov-19 A	-	03-Sep-22		34		
Design of telecommunicatio		1173	75		28-Jun-19 A		04-Aug-22		19		<u></u>
05-2380	Power Distribution System concept / schematics (2.10.06.01)	135	60	F0/	31_ Ion. 01 A	28-Sep-22	08-Aug-22	06-0-1 22	8		

# **3-Month Rolling Programme (July 2022)**

Page 3 of 15

Remaining Work Actual Work

Actual Milestone

♦ ♦ Milestone

Critical Remaining Work

Critical Milestone

ct No. EP/SP/66/12 Facilities, Phase 1	環境保護署 Environmental Protection Department
Sep	Oct
58	59
19-Aug-22, ACC Equipment Structure	28-Sep-22, Weighbridge, Weighbridge, 28-
03-Sep-22, Mechanical Treatmer acility (2.2.11), 18-Aug-22, 18-Aug-22, / system (2.2.12), 09-Aug-22, 09-Aug-2	Onshore crane Facility (2.2.11)
18-Sep-22, 18-Sep-22, 18-Sep-22, 18-Sep-22, 9-Aug-22, Design of the Air Quality Mo	28-Sep-22, ACC Equipm ent Structure Administration Building and Viewing Gallery IW/MF Site Wide Architectural Details (2.9.00 Site Master Layout Plan and Plant Layout (2.1 nitdring Stations (2.9.0.1), Design of the Air Qu
9-Aug-22, Autom atic Traffic Control Sy	<ul> <li>steim (ATCS) (2.10.06.12), Automatic Traffic (</li> <li>28-Sep-22, Electrical Services and Lighting</li> <li>28-Sep-22, ELV (7 Packages), ELV (7 Package)</li> <li>28-Sep-22, Lifts and Escalators (2 Package)</li> <li>28-Sep-22, Vehicle &amp; Container Wash Sys</li> <li>28-Sep-22, Water Cannon System, Water (</li> </ul>
	28-Sep-22, Fire services installation design
	2
	2
	28-Sep-22, Foundation design (2.6.01) 28-Sep-22, Structural design (2.6.02), Struc 28-Sep-22, Fire services installation design
	28-Sep-22, Plumbing, Plumbing, 28-Sep-2 28-Sep-22, Drainage, Drainage, 28-Sep-22
	<ol> <li>28-Sep-22, Fire services installation design</li> <li>28-Sep-22, Lifts and Escalators, Lifts and E</li> </ol>
n (2.8.05) (2 Packages), Fire services i	nstallation design (2.8.05) (2 Packages), 31-
	2
	28-Sep-22, Electrical Services and Lighting
	13-Oct-22, Water Tank 28-Sep-22, External FS Systems (2.10.04.0
	28-Sep-22, Power Distribution System con 28-Sep-22, Site ELV Network System - Cor

KEPPEL SEGHERS - ZHEN HUAJOIN	Activity Name	Original	Remaining	Activity 9	% Current Start	Current Finish	Late Start	Late Finish	Total Float M56 Remarks		ed Waste Managen
	Puuviy valle	Duration	Duration	Complete	e	Gurrent Finish	Late Start	Laternish	Total Floar Wide Hemarks	Jul 56	Aug 57
05-2420	Site ELV Network System - Security Systems concept / schematics (2.10	135	60		6 31-Oct-20 A		· ·	01-Nov-22	34		
05-2430 05-2440	Site ELV Network System - Navigation aids concept / schematics (2.10.0) Microwave transmission of FS direct link (2.10.06.07)	105 105	75 30		6 31-May-22 6 28-Jun-19 A	13-Oct-22	-	17-Oct-22 27-Sep-22	4		
05-2440	Fuel Handling System concept / schematics (2.10.06.08)	135	30		6 24-Jan-20 A	-	29-Aug-22 23-Aug-22		23		
	es and Landscaping Works (2.11)	728	90			28-Oct-22	-	07-Dec-22	40		
External and internal fini	ishes design External and internal finishes design for Incineration Plant Building (2.11.0	652	30 30		31-Oct-20 A			21-Sep-22	23 23		
<pre> 05-2510  05-2520</pre>	External and internal finishes design for ACC Equipment Yard	105 75	30		6 31-Oct-20 A 6 31-May-22	-	-	21-Sep-22 21-Sep-22	23		
05-2530	External and internal finishes design for Turbine Hall Building	105	5		6 31-Oct-20 A		-	08-Aug-22	4		04-Aug-22, External and inte
<b>05-2540</b>	External and internal finishes design for CCCW Building	105	5	80%	6 31-Oct-20 A	-	05-Aug-22	09-Aug-22	5		04-Aug-22, External and inte
05-2550	External and internal finishes design for Chimney	60	30		6 31-May-22	29-Aug-22	-	21-Sep-22	23		
<pre>05-2560 05-2570</pre>	External and internal finishes design for Reception Pavilion External and internal finishes design for MT Plant Building (2.11.02)	105 105	30 30		6 31-Oct-20 A 6 31-Oct-20 A		-	21-Sep-22 21-Sep-22	23		
05-2580	External and internal finishes design for the Wastewater Treatment Plant	105	30		6 30-Sep-21 A		15-Aug-22	13-Sep-22	15		
05-2590	External and internal finishes design for the Water Treatment Plant Buildin	105	30	25%	6 30-Sep-21 A	A 29-Aug-22	23-Aug-22	21-Sep-22	23		
<b>05-2600</b>	External and internal finishes design for the Administration Building (2.11.	105	30		6 31-Oct-20 A		23-Aug-22		23		
05-2610	External and internal finishes design for the IW MF Substation (2.11.06)	105	10		6 31-Oct-20 A			19-Aug-22	10		09-Aug-22, External
05-5410 Facade Structural Design	External and internal finishes design for Elevated Driveway	105 90	30 90		6 31-Jul-21 A 31-Jul-22	29-Aug-22 28-Oct-22	-	21-Sep-22 07-Dec-22	23 40		
05-8090(6D)10	Sky Deck near Administration Building Structural Design	90	90		6 31-Jul-22	28-Oct-22		07-Dec-22	40	31-Jul-22	
	ties for the Operation (2.13)	105	10			Ű	11-Aug-22	Ű	11		
05-2690	Design of vehicles for MSW and Ash and Residues delivery (2.13.01)	105	10		6 30-Sep-20 A	A 09-Aug-22 12-Nov-22	-	20-Aug-22	11		09-Aug-22, Design o
AIP Miscellaneous Works 05-2710	Design of process related CCTV and existing onshore crane replacement	743 105	105 105		6 31-Jul-22	12-Nov-22		14-Dec-22 04-Dec-22	<u>32</u> 22	31-Jul-22	
05-2720	Design of visitors and environmental education facilities (2.14.02)	105	60	5%	6 31-Oct-20 A	28-Sep-22	16-Oct-22		77		
AIP Miscellaneous Detaili		90	90		31-Jul-22	28-Oct-22		06-Dec-22	39		
<pre>05-2740 05-2750</pre>	Gatehouses (2.15.03)	90 90	90 90		6 31-Jul-22 6 31-Jul-22	28-Oct-22 28-Oct-22		06-Dec-22 03-Dec-22	39	31-Jul-22	
AIP O&M Packages	Weighbridge office (2.15.04)	90 190	90 190		01-Oct-22	28-0ct-22 08-Apr-23	05-Sep-22 01-Oct-22	03-Dec-22 08-Apr-23	36	31-Jul-22	
05-8050-1(M55)	Design of (pilot) Electric Vehicle	190	190		6 01-Oct-22*	08-Apr-23	01-Oct-22	08-Apr-23	0		
DDA Design Package S		1593	305			31-May-23		20-Sep-23	112		
DDA Processand Layout		809 686	140 140			A 17-Dec-22		20-Sep-23 30-Jan-23	<u> </u>		
<b>MSW</b> treatment process ( <b></b> 05-3500	design for mechanical treatment (2.1.14) Mechanical Treatment Plant (2.1.14)	105	140	0%	31-Jan-21 A 6 04-Sep-22		18-Oct-22 18-Oct-22	30-Jan-23 30-Jan-23	44		
05-3510	Water Treatment Plant and Boiler Water Treatment (Demin Unit) Plant	105	60		6 31-Jan-21 A		23-Oct-22	21-Dec-22	84		
	ess design for incineration (2.1.16)	105			<u> </u>	A 28-Sep-22		20-Sep-23	357		
05-4660	Flue Gas Treatment System (2 Packages)	105 105	60		6 30-Sep-20 A	· · ·	10-Aug-22 23-Jul-23	08-Oct-22 20-Sep-23	10 357		
05-4980 DDA Group d Treatment, B	Boiler ash and APC residue handling and solidification (2 Packages) Reclamation, Seawall, Breakwater, Berth (2.2)	1397	60 109		6 30-Sep-20 A	16-Nov-22	23-Jui-23 01-Aug-22		-16		· · · · · · · · · · · · · · · · · · ·
05-3430-2(M37)	Geotechnical Interpretative Report (2.2.02.02)	105	10		6 31-Dec-20 A	_		11-Aug-22	2		09-Aug-22, Geotech
05-3450	Seawall design (2.2.20)	60	20	65%	6 20-Jan-19A	19-Aug-22	02-Aug-22	21-Aug-22	2		19-Au
05-3480	Onshore crane Facility (2.2.23)	90	90		6 19-Aug-22		03-Aug-22		-16		19-Aug-22
05-3490	Onshore vessel power supply system (2.2.24)	90 1154	90 150		6 10-Aug-22	07-Nov-22 27-Dec-22	-	31-Oct-22	-7 21		10-Aug-22
<b>DDA Incineration Plant Bu</b> Foundation design (2.3.1		90	30			29-Aug-22	22-Aug-22		22		
<b>05-3240</b>	Turbin Hall Building	90	30	80%	6 08-Jul-21 A	29-Aug-22	22-Aug-22	20-Sep-22	22		
Structural design (2.3.14		189	10			09-Aug-22	09-Aug-22		9		
05-5350 Electrical and instrument	Turbin Hall Building (2.3.14.03) tation works design (2.3.15)	189 424	10 120		6 03-Jun-21 A	4 27-Nov-22	-	18-Aug-22 20-Dec-22	9		09-Aug-22, Turbin H
2.3.15.01		105	30			29-Aug-22	04-Sep-22		35		
<b>05-3360</b>	11kV/380V Power Transformers Design (23.15.01)	105	30	80%	6 05-Nov-21 A			03-Oct-22	35		
E&IC Package 1 (Proces 05-3370	Electric Heat Tracing (Process Island) (2.3.15.0210)	378 120	1	5%	22-Sep-20 A 6 17-Feb-22 A		10-Jul-22 31-Jul-22	31-Jul-22 31-Jul-22	0		Electric Heat Tracing (Process
05-3390-10(M55)	Electrical Works - MCC Panels (2.3.15.02.10)	105	1		6 22-Sep-20 A		31-Jul-22	31-Jul-22	0		Electrical Works - MCC Panels
05-3390-11(M55)	Electrical Works - Process Island Uninterruptable Power Supply (UPS) (	105	1	80%	6 27-Nov-20 A	31-Jul-22	31-Jul-22	31-Jul-22	0		Electrical Works - Process Islar
05-3390-13(M55)	Electrical Works E&I Installation at Yard (2.3.15.02.08)	105	1	25%	6 07-May-22	31-Jul-22	10-Jul-22	10-Jul-22	-21		Electrical Works E&I Installation
05-3390-6(M55)	Electrical Works Instrumentation (2.3.15.02.06)	105	1		6 15-Oct-21 A		31-Jul-22	31-Jul-22	0		Electrical Works Instrumentation
05-3390-9(M55) 05-7400-1(M55)	Electrical Works - VSD (2.3.15.02.02) Electrical works CEMS and Process Analysers (2.3.15.02.07)	105 105	1		6 15-Dec-20 A 6 12-Jul-21 A		31-Jul-22 31-Jul-22	31-Jul-22 31-Jul-22	0		Electrical Works - VSD (2.3.15.) Electrical works CEMS and Proc
Operation Management		90	90	5%	_	27-Nov-22		20-Dec-22	23		
<b>05-4490</b>	Design of the Air Quality Monitoring Stations (2.9.03)	60	60	0%	6 30-Aug-22		18-Sep-22	16-Nov-22	19		30-Au
05-5400-1(M22)	Automatic Traffic Control System (ATCS)	90	90	0%	6 30-Aug-22		· ·	20-Dec-22	23		30-Au
2.3.15.05	Electrical and Instrumontation Works Decign - Delegas of District Works	105 105	1	000	15-Jul-21 A		31-Jul-22	31-Jul-22	0		Electrical and lock-uncertainty 14
05-3390-15(M55) 05-3390-16(M55)	Electrical and Instrumentation Works Design - Balance of Plant LV Switc Package 3 (Balance of Plant) - Weighbridge Electrical & Instrumentation	105	1		6 07-May-22 6 04-Jan-22 A		31-Jul-22 31-Jul-22	31-Jul-22 31-Jul-22	0		Electrical and Instrumentation V Package 3 (Balance of Plant) - V
05-3390-17(M55)	Waste Crane Functional Description (23.15.05.08)	105	1		6 15-Jul-21 A		31-Jul-22	31-Jul-22	0		Waste Crane Functional Descrip
05-3390-3(M55)	Electrical and Instrumentation Works Design - Compressed Air Plants (2	105	1		6 29-Nov-21 A		31-Jul-22	31-Jul-22	0		Electrical and Instrumentation W
05-3390-5(M55)	Electrical and Instrumentation Works - Ash Crane (2.3.15.05.05)	105	1	80%	6 30-Aug-21 A	A 31-Jul-22	31-Jul-22	31-Jul-22	0		Electrical and Instrumentation W

# **3-Month Rolling Programme (July 2022)**

Hemaining Work Actual Work

Actual Milestone

Critical Milestone

Critical Remaining Work

♦ ♦ Milestone

Page 4 of 15

ct No. EP/SP/66/12 Facilities, Phase 1	環境保護署 Environmental Protection Department
2 Sep	Oct
58	59
	28-Sep-22, Site ELV Network System - Sec
29 Aug 22 Microwayo transmission of	13-Oct-22, Site ELV N FS /direct link (2.10.06.07), Microwave transm
	ept// schematics (2.10.06.08), Fuel Handling S
29-Aug-22, External and internal finishe	s design for Incineration Plant Building (2.11.
29-Aug-22, External and internal finishe	s design for ACC Equipment Yard, External a
ishes design for Turbine Hall Building,	External and internal finishes design for Turbin
ishes design for CCCW Building, Exter	nal and internal finishes design for CCCW Bu
29-Aug-22, External and internal finishe	s design for Chimney, External and internal fir
29-Aug-22, External and internal finishe	s design for Reception Pavilion, External and
29-Aug-22, External and internal finishe	s design for MT Plant Building (2.11.02), Exte
29-Aug-22, External and internal finishe	s design for the Wastewater Treatment Plant
29-Aug-22, External and internal finishe	s design for the Water Treatment Plant Buildi
29-Aug-22, External and internal finishe	s design for the Administration Building (2.11
rnal finishes design for the IWMF Subs	tation (2.11.06), External and internal finishes
29-Aug-22, External and internal finishe	s design for Elevated Driveway, External and i
	2
es for MSW and Ash and Residues deliv	very (2.13.01), Design of vehicles for MSW an
	1 de Con 22 Docimentations and and
	28-Sep-22, Design of visitors and environm
	2
01-Oct-22	*
22	
	28-Sep-22, Water Treatment Plant and Boil
	28-Sep-22, Flue Gas Treatment System (2 28-Sep-22, Boiler ash and APC residue ha
erpretative Report (2.2.02.02), Geotechn	ical Interpretative Report (2.2.02.02), 09-Aug-
awall design (2.2.20), Seawall design (2.2.20)	
	1
29-Aug-22, Turbin Hall Building, Turbin	Hall Building, 29-Aug-22
	14.00 00 Aur CC
ing (2.3.14.03), Turbin Hall Building (2.3	3.14.03), 09-Aug-22
29-Aug-22, 11kV/380V Power Transform	ner's Design (2.3.15.01), 11kV/380V Power Tra
2.3.15.02.10), 31-Jul-22, 31-Jul-22, El ec	tric HeatTracing (Process Island) (2.3.15.02
2.01), 31-Jul-22, 31-Jul-22, Electrical V	
	02.03), 31-Jul-22, 31-Jul-22, Electrical Works
	lectrical Works E&I Installation at Yard (2.3.1
.02.06), 31-Jul-22, 31-Jul-22, Electrical	
1-Jul-22, 31-Jul-22, Electrical Works -	VSD (2.3.15.02.02)
alysers (2.3.1 5.02.07), 31-Jul-22, 31-Jul	-22, Electrical works CEMS and Process Ana
	2
aign Balance of Blant IV Outstate	
	Design (2.3.15.05.01), 31-Jul-22, 31-Jul-22, E
	ge & ALPCRS (2.3.1.5.0.5.07), 31-Jul-22, 31-J
	Crane Functional Description (2.3.15.05.08)
	5.03), 31-Jul-22, 31-Jul-22, Electrical and Ins Jul-22, Electrical and Instrumentation Works
on orane (ב.ס.15.05.00), 3 ו-J ul-22, 31 -	ייבב, בופטווכמו מוט ווא וינוחפת ation works

Mechanical works design (										Aug
_intechanical works design (	2.3.16)	683	120	31-Oct-19 A	27-Nov-22	31-Jul-22	07-Dec-22	10	56	57
Plant and Equipment	Wasto Crass and Cramle System (2.2, 15.05.0.4)	471 105	120 30		27-Nov-22	05-Aug-22 05-Aug-22	07-Dec-22	10 5		
05-3790 05-3790	Waste Crane and Grapple System (2.3.15.05.04) Flue Gas Treatment System (12 Pack ages)	105	30 60	80% 30-Sep-20 A 25% 31-Oct-19 A		05-Aug-22 09-Oct-22	03-Sep-22 07-Dec-22	10		
05-3825(3)	Closed Circuit Cooling Water System	105	30	5% 31-Oct-20 A		24-Aug-22		24		
Process Pipeworks (Incl. I		105	3	31-May-21		31-Jul-22	02-Aug-22	0		
05-4950	Turbine Hall	105	3	5% 31-May-21	-	31-Jul-22	02-Aug-22			Turbine Hall, 02-Aug-22, 02-Au
Process steel structure su 05-3540	Pipe Rack C1, C2, C3, D1 & D2 (Prefab.3)	376 105	30 30	5% 29-May-21	A 29-Aug-22 29-Aug-22	01-Aug-22 25-Oct-22	23-Nov-22 23-Nov-22	86		
05-3550	Turbine Hall	105	1	5% 31-Aug-20 A	-		01-Aug-22	1		31-Jul-22, Turbine Hall, Turbine Ha
	excluding fire services installation design) (2.3.18)	90	90	'	27-Dec-22		17-Jan-23	21		
05-3780	Vehicle & Container Wash System	60	60	0% 29-Sep-22		25-Oct-22	23-Dec-22	26		
05-3780-2(M20)	Water Cannon System and Fire Saftey Strategy (2.3.25)	90 153	90 105	0% 29-Sep-22	12-Nov-22		17-Jan-23 07-Dec-22	21 25		
05-3290	Process Building & Wastewater Treatment Plant	105	105	0% 13-Jun-22 A		25-Aug-22		25		
05-3300	ACC Equipment Structure	105	105	0% 31-Jul-22	12-Nov-22	25-Aug-22	07-Dec-22	25	31-Jul-22	
05-3330	Chimney	105	105	0% 31-Jul-22	12-Nov-22	25-Aug-22		25	31-Jul-22	
05-3350	Reception Pavilion	105	105	0% 31-Jul-22	12-Nov-22	25-Aug-22		25	31-Jul-22	
05-3520	Site Master Layout Plan and Plant Layout Administration Building and Viewing Gallery (2.7.21)	105 105	105 105	0% 31-Jul-22 0% 31-Jul-22	12-Nov-22 12-Nov-22	25-Aug-22 25-Aug-22		25	31-Jul-22 31-Jul-22	
05-5160	Mechanical Treatment Plant & Water Treatment Plant (2.4.25)	105	105	0% 31-Jul-22	12-Nov-22	-	07-Dec-22	25	31-Jul-22	
05-6110(M46)	Gate House and miscellaneous	105	105	0% 31-Jul-22	12-Nov-22		07-Dec-22	25	31-Jul-22	
DDA Mechanical Treatment		105	105	31-Jul-22	12-Nov-22		27-Jan-23	76		
05-5170	Foundation design (2.4.13)	90	90	0% 31-Jul-22	28-Oct-22	-	28-Nov-22	31	31-Jul-22	
05-5180 DDA Wastewater Treatment	Structural design (2.4.14)	105 90	105 90	0% 31-Jul-22	12-Nov-22 16-Jan-23		27-Jan-23 17-Jan-23	76	31-Jul-22	
05-3970	Fire services installation design (2.5.17) (2 Packages)	90	90	0% 19-Oct-22	16-Jan-23		17-Jan-23	1		
DDA Water Treatment Plant		238	177	11-Apr-22 A	23-Jan-23	21-Sep-22	16-Mar-23	52		
05-4060	Foundation design (2.6.13)	60	60	0% 29-Sep-22		· · ·	28-Nov-22	1		
05-4070 Electrical and instrumentat	Structural design (2.6.14)	90 238	90 177	0% 29-Sep-22 11-Apr-22 A			27-Jan-23 16-Mar-23	31 52		
05-4080	Water Treatment Plant (WTP) - Variable Speed Drive (2.6.15.01)	238	177	5% 11-Apr-22 A			16-Mar-23	52		
DDA IWMF Substation (2.8)		90	90	· ·	28-Oct-22	· · ·	07-Dec-22	40		
05-4340	Fire services installation design (2.8.17)	60	60	0% 31-Jul-22	28-Sep-22		06-Nov-22	39	31-Jul-22	
Building services design (e 05-4990	excluding fire services installation design) (2.8.18) Electrical Services and Lighting	90 90	90 90	31-Jul-22 0% 31-Jul-22	28-Oct-22 28-Oct-22	09-Aug-22 09-Sep-22	07-Dec-22 07-Dec-22	40	31-Jul-22	
05-5010	Plumbing	90	90	0% 31-Jul-22	28-Oct-22	· ·	06-Nov-22	9	31-Jul-22	
05-5020	Drainage	90	90	0% 31-Jul-22	28-Oct-22		06-Nov-22	9	31-Jul-22	
05-5030	ELV	90	90	0% 31-Jul-22	28-Oct-22	08-Sep-22	06-Dec-22	39	31-Jul-22	
05-5030-1	Building Management System (BMS)	90	90	0% 31-Jul-22	28-Oct-22		06-Nov-22	9	31-Jul-22	
DDA Air Cool Condensers E Building services design (	Equipment (2.3.06) excluding fire services installation design) (2.3.06)	90 90	90 90		28-Oct-22 28-Oct-22	20-Oct-22 20-Oct-22	17-Jan-23	81 81		
05-5520	Plumbing	90	90	0% 31-Jul-22	28-Oct-22		17-Jan-23	81	31-Jul-22	
	nd Associated Structures Foundation	150	150		27-Dec-22		22-Jan-23	26		
Building services design (e 05-5560	excluding fire services installation design) Building Management System (BMS)	150 90	150 90	31-Jul-22 0% 31-Jul-22	27-Dec-22 28-Oct-22	25-Oct-22 25-Oct-22	22-Jan-23 22-Jan-23	86	01 Jul 00	
05-7240	Electrical Services and Lighting	90	90	0% 31-Jul-22 0% 29-Sep-22		25-Oct-22 25-Oct-22		26	31-Jul-22	
DDA Reception Pavilion		105	60	· · ·	28-Sep-22		20-Nov-22	53		
05-5390	Structural Design	105	60	5% 08-May-20	28-Sep-22		20-Nov-22	53		
DDA Roads and Utilities (2.		377	165		A 11-Jan-23		15-Jan-23	4		
Permanent road works layo 05-4470	but on the Artificial Island (210.13) Roads and hardstandings layout	90 90	90 90	31-Jul-22 0% 31-Jul-22	28-Oct-22 28-Oct-22		20-Dec-22 20-Dec-22	53 53	31-Jul-22	
05-4480	Road signage and markings	90	90	0% 31-Jul-22	28-Oct-22		20-Dec-22	53	31-Jul-22	
Sewerage design on the Ar		90	4	13-Jan-22 A	03-Aug-22	31-Jul-22	03-Aug-22	0		
05-4440-1(M55)	Ship-to-shore Sewage Transfer System for WMF Vessels (Caisson 13)	90	4		-	31-Jul-22	03-Aug-22	0		Ship-to-shore Sewage Trans
Drainage system design or 05-5310	n the Artificial Island (210.15) Surface water Drainage System	302 90	90 90	31-Dec-21 / 0% 31-Jul-22	A 28-Oct-22 28-Oct-22		20-Dec-22 20-Dec-22	53 53	31-Jul-22	
05-5320	First Flush Drainage System concept	105	60	45% 31-Dec-21 A		22-Oct-22	20-Dec-22	83	51-001-22	
	n on the Artificial Island (2.10.16)	90	90	31-Jul-22	28-Oct-22	22-Sep-22		53		
05-5270	Irrigation System	90	90	0% 31-Jul-22	28-Oct-22	· ·	20-Dec-22	53	31-Jul-22	
05-5280	Rainwater harvesting System	90	90	0% 31-Jul-22	28-Oct-22		20-Dec-22	53	31-Jul-22	
_Design of telecommunicati 05-4580	Power Distribution System concept / schematics	165 75	165 75	31-Jul-22 0% 29-Sep-22	11-Jan-23 12-Dec-22	22-Sep-22 07-Oct-22	15-Jan-23 20-Dec-22	8		
05-4600	Lightning Protection System concept / schematics	90	90	0% 31-Jul-22	28-Oct-22	22-Sep-22		53	31-Jul-22	
05-4630	Site ELV Network System - Navigation aids concept / schematics	90	90	0% 14-Oct-22	11-Jan-23	18-Oct-22	15-Jan-23	4		
05-4640	Microwave transmission of FS direct link	105	105	0% 30-Aug-22	12-Dec-22	28-Sep-22	10-Jan-23	29		30-Au
05-4650	Fuel Handling System concept / schematics	90	90	0% 30-Aug-22		· · ·	20-Dec-22	23		30-Au
DDA Architectural, Finishes External and internal finish	s and Landscaping Works (2.11)	120 115	120 115	31-Jul-22 05-Aug-22	27-Nov-22 27-Nov-22	09-Aug-22 09-Aug-22	21-Jan-23 20-Dec-22	23		
_	g Programme (July 2022)					00 1109 22		Remaining Work	Actual Miles	
e 5 of 15	` ` ` ` `							Actual Work	<ul> <li>Critical Miles</li> </ul>	stone
								Critical Remaining V	Nork	

ct No. EP/SP/66/12 Facilities, Phase 1	電子 現境保護署 Environmental Protection Department
2 Sep 58	Oct 59
9-Aug-22, Waste Crane and Grapple S	System (2.3.15.05.04), Waste Crane and Grap
9-Aug-22, Closed Circuit Cooling Wat	er System, Closed Circuit Cooling Water Sys
rbine Hall	
9-Aug-22, Pipe Rack C1, C2, C3, D1 8 ul-22	& D2 (Prefab.3), Pipe Rack C1, C2, C3, D1 & I
29-Sep-22 29-Sep-22	
	2
	19-Oct-22
29-Sep-22 29-Sep-22	
	28-Sep-22, Fire services installation desig
	2
	2
	2
29-Sep-22	2
	28-Sep-22, Structural Design, Structural D
	,
	2
m for WMFVessels (Caisson 13), 03	-Aug-22, 03-Aug-22, Ship-to-shore Sewage T
	2
	28-Sep-22, First Flush Drainage System c
	2
29-Sep-22	
	14-Oct-22

	Activity Name	Original Duration	Duration	Activity % Current Start Complete	Current Finish	Late Start	Late Finish	Total Float M56 Remarks	Jul	Aug
05-4670	External and internal finishes design for Incineration Plant Building (2.11.	90	90	0% 30-Aug-2	2 27-Nov-22	22-Sep-22	20-Dec-22	23	56	57 30-Aug
05-4680	External and internal finishes design for ACC Equipment Yard	90	90	0% 30-Aug-2			20-Dec-22	23		30-Aug
05-4690	External and internal finishes design for Turbine Hall Building	90	90	0% 05-Aug-2	2 02-Nov-22	09-Aug-22	06-Nov-22	4		05-Aug-22
05-4700	External and internal finishes design for CCCW Building	90	90	0% 05-Aug-2	2 02-Nov-22		07-Nov-22	5		05-Aug-22
05-4710	External and internal finishes design for Chimney	90	90	0% 30-Aug-2				23		30-Aug
05-4720	External and internal finishes design for Reception Pavilion	90 90	90	0% 30-Aug-2		· ·	20-Dec-22	23		30-Aug
05-4730 05-4740	External and internal finishes design for MT Plant Building (2.11.16) External and internal finishes design for the Wastewater Treatment Plant	90 60	90 60	0% 30-Aug-2 0% 30-Aug-2			20-Dec-22 12-Nov-22	15		30-Aug 30-Aug
05-4750	External and internal finishes design for the Wastewater Treatment Plant Buildin	90	90	0% 30-Aug-2		22-Sep-22		23		30-Aug
05-4760	External and internal finishes design for the Administration Building (2.11.	90	90	0% 30-Aug-2			20-Dec-22	23		30-Aug
05-4770	External and internal finishes design for the IWMF Substation (2.11.20)	90	90	0% 10-Aug-2	2 07-Nov-22	20-Aug-22	17-Nov-22	10		10-Aug-22
05-5420	External and internal finishes design for Elevated Driveway	90	90	0% 30-Aug-2			20-Dec-22	23		30-Aug
Facade Structural Design 05-8010(M45)	IW MF Sub-station	90 90	90 90	31-Jul-22 0% 31-Jul-22		24-Oct-22 24-Oct-22	21-Jan-23	85 85	31-JL	
DDA Testing and Commission		90 105	90 30		28-0cl-22			11	31-JU	
05-4810-2(M55)	FAT of DCS - Software SIL FAT Plant for Process Island (2.12.09.03.01)	105	30	80% 19-May-2	0		09-Sep-22	11		
DDA Transportation Faciliti	es for the Operation (2.13)	341	305		A 31-May-23	-	11-Jun-23	11		
05-4850	Design of vehicles for MSW and Ash and Residues delivery (2.13.05)	341	295	0% 25-Jun-22	-	21-Aug-22		11		
05-4860	Design of marine vessels for the use of the Employer and visitors (2.13.06	305	305	0% 31-Jul-22		11-Aug-22		11	31-Ju	l-22
DDA Auxiliary Plant System 05-4940-3(6E)	IS (2.16) EOTC System (2.16.11)	90 90	93 93	26-Apr-22 5% 26-Apr-22	A 31-Oct-22		05-Dec-22 05-Dec-22	35 35		
ocurement of Major		933	312	· · ·	A 07-Jun-23	23-May-22		1		
ff-site Fabrication of In	• •	900	279		A 05-May-23	23-May-22		-39		
abrication of Module (TPU		900	279		A 05-May-23		_	-44		
PFab 1- Line 1		785	164		A 10-Jan-23			-69		
Structure Fabrication		236	83		A 21-Oct-22	30-Jun-22		-18		
06-TPU-1-1160	PFab 1-Line 1 - Tertiary Structure Fabrication	200	83	58.5% 13-Oct-20		13-Jul-22	03-Oct-22	-18		
06-TPU-1-1200 Structure Erection	PFab 1-Line 1 - 4th & Top Floor Prim ary & Secondary Steel Structure Fat	109 122	6 113	94.5% 03-Oct-21	A 05-Aug-22 A 20-Nov-22	30-Jun-22 23-May-22	05-Jul-22 02-Nov-22	-31 -18		PFab 1-Line 1 - 4th & Top
06-TPU-1-1070	PFab 1-Line 1 - 4th Floor(EL37.72m~EL47.22m) Primary & Secondary S	30	21	30% 03-May-22		23-May-22 23-May-22		-69		PFa
06-TPU-1-1080	PFab 1-Line 1 - Top Floor(EL47.22 m~ EL54.47m) Primary & Secondary S	30	48	0% 17-Jun-22		06-Jul-22	22-Aug-22	-31		
06-TPU-1-1090	PFab 1-Line 1 - Tertiary Structure Erection	90	113	0% 14-Jan-22	A 20-Nov-22	13-Jul-22	02-Nov-22	-18		
Mechanical Erection		251	92	04-Feb-22	A 30-Oct-22	13-Jun-22	22-Aug-22	-69		
06-TPU-1-1100	PFab 1-Line 1 Mechanical Installation - 1st Floor (Below EL20.47m) (Incl	80	37	53.75% 04-Feb-22	· ·	17-Jul-22	22-Aug-22	-14		
06-TPU-1-1110	PFab 1-Line 1 Mechanical Installation - 2nd Floor(EL20.47m~EL26.72m)	80	31	61.25% 22-Feb-22	· ·	23-Jul-22	22-Aug-22	-14		
06-TPU-1-1120 06-TPU-1-1130	PFab 1-Line 1 Mechanical Installation - 3rd Floor( EL26.72m~EL37.72m) PFab 1-Line 1 Mechanical Installation - 4th Floor(EL37.72m~EL47.22m)	80 80	37 49	53.75% 06-May-22 38.75% 18-Jun-22	· ·	17-Jul-22 05-Jul-22	22-Aug-22 22-Aug-22	-14 -26		
06-TPU-1-1250	PFab 1-Line 1 Mechanical Installation - Boiler Lifting & Installation	80	71	11.25% 24-Jun-22		13-Jun-22	22-Aug-22 22-Aug-22	-69		
Piping Fabrication		200	39	10-Feb-2	A 07-Sep-22	23-May-22		-69		
06-TPU-1-1220	PFab 1-Line 1 - Piping Fabrication	200	39	80.5% 10-Feb-2	A 07-Sep-22	23-May-22	30-Jun-22	-69		
Piping Installation		150	124		A 01-Dec-22	-	23-Sep-22	-69		
06-TPU-1-1000	PFab 1-Line 1 - Piping installation	150	124	17.33% 05-Jul-22		-	23-Sep-22	-69	2 A	
E&I Fabrication 06-TPU-1-1230	PFab 1-Line 1 - E&I Fabrication	180 180	94 94	47.78% 14-Apr-22	A 01-Nov-22		28-Aug-22 28-Aug-22	-65 -65		
E&I Installation		115	115	· · ·	2 26-Nov-22		18-Sep-22	-69		
06-TPU-1-1260	PFab 1-Line 1 - E&I Support Installation	45	45	0% 04-Aug-2	2* 17-Sep-22	27-May-22	10-Jul-22	-69	0,	4-Aug-22*
06-TPU-1-1270	PFab 1-Line 1 - E&I Cable Ladder Erection	45	45	0% 14-Aug-2	2 27-Sep-22	06-Jun-22	20-Jul-22	-69		14-Aug-22
Electrical	DEeb 4 Line 4 Electrical Only Dulling and Tampingfor	96	96	23-Aug-22		17-Jun-22	18-Sep-22	-69		
06-TPU-1-1280 06-TPU-1-1290	PFab 1-Line 1 - Electrical Cable Pulling and Termination PFab 1-Line 1 - Electrical Equipment Installation	80 45	80 45	0% 08-Sep-2 0% 25-Aug-2		01-Jul-22 17-Jun-22	18-Sep-22 31-Jul-22	-69 -69		25-Aug-22
06-TPU-1-1300	PFab 1-Line 1 - Electrical Equipment installation	45	45	0% 25-Aug-22		17-Jun-22	31-Jul-22	-69		25-Aug-22 25-Aug-22
06-TPU-1-1340	PFab 1-Line 1 - MCC room installation	45	45	0% 23-Aug-2		17-Jun-22	31-Jul-22	-67		23-Aug-22*
Instrument		94	94		2 26-Nov-22	17-Jun-22	18-Sep-22	-69		
06-TPU-1-1310	PFab 1-Line 1 - Instrument Cable Pulling and Termination	80	80	0% 08-Sep-2	2 26-Nov-22	01-Jul-22	18-Sep-22	-69		
06-TPU-1-1320	PFab 1-Line 1 - Instrument Equipment Installation	45	45	0% 25-Aug-2		17-Jun-22	31-Jul-22	-69		25-Aug-22
06-TPU-1-1330	PFab 1-Line 1 - Instrument Tubing Installation	45	45	0% 25-Aug-2				-69		25-Aug-22
Insulation 06-TPU-1-1020	PFab 1-Line 1 - Insulation	150 150	149 149	23-May-22 0.67% 23-May-22		23-May-22 23-May-22	18-Oct-22 18-Oct-22	-69 -69		
Precommissioning		60	60	12-Nov-22		-	02-Nov-22	-69		
06-TPU-1-1030	PFab 1-Line 1 - Pre-commissioning	60	60	0% 12-Nov-22		04-Sep-22		-69		
PFab 1- Line 2		539	163		A 09-Jan-23		08-Nov-22	-62		
Structure Fabrication	PEab 1 Line 2. Testion: Officiative Estimation	200	90		A 28-Oct-22			11		
06-TPU-2-1040 06-TPU-2-1200	PFab 1-Line 2 - Tertiary Structure Fabrication PFab 1-Line 2 - 4th & Top Floor Prim ary & Secondary Steel Structure Fat	200 125	90 9	55% 09-Nov-20 92.8% 08-Oct-21		-	08-Nov-22 14-Jun-22	-55		PFab 1-Line 2 - 4th
Structure Erection		90	9		A 29-Oct-22	15-Jun-22	08-Nov-22	-55		
06-TPU-2-1100	PFab 1-Line 2 - Top Floor(EL47.22m~ EL54.47m) Prim ary & Secondary S	30	42		2. 19-Sep-22			-55		
06-TPU-2-1110	PFab 1-Line 2 - Tertiary Structure Erection	90	91	0% 14-Jan-22			08-Nov-22	10		
Mechanical Erection		242	58	04-Feb-22	A 26-Sep-22	30-May-22	26-Jul-22	-62		
								Demoisi		Milastana
onth Rollin	g Programme (July 2022)							Remaining	, work 🔻 🗢 Actual	Milestone

imary & Secondary Steel Structure Fabricate (Beam/Cloumn/Plate.etc), 0 1 - 4th Floor(EL37.72m - EL47.22m) Primary & Secondary Steel Structure PFab 1-Line 1 - Top Floor(EL47.22m - EL5 PFab 1-Line 1 Mechanical Installation - 1st Floor (Below EL20.47 PFab 1-Line 1 Mechanical Installation - 2nd Floor(EL20.47m - EL5 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m - EL5 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m - EL5 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m - EL5 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m - EL5 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m - EL5 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m - EL5 PFab 1-Line 1 - Piping Fabrication, 07-Sep-22, 07-Sep-22, PFab 17-Sep-22, PFab 1-Line 1 - E&I Support Installation 27-Sep-22, PFab 1-Line 1 - E&I Ca -Sep-22 08-Oct-22, PFab 1-Line -Sep-22 08-Oct-22, PFab 1-Line -Sep-22	
P imary & Secondary Steel Structure Fabricate (Beam/Cloumn/Plate.etc), 0 1 - 4th Floor(EL37.72m - EL47.22m) Primary & Secondary Steel Structure   PFab 1-Line 1 Mechanical Installation - 1st Floor (Below EL20.47 PFab 1-Line 1 Mechanical Installation - 2nd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 - Piping Fabrication, 07-Sep-22, 07-Sep-22, PFab 17-Sep-22, PFab 1-Line 1 - E&I Support Installat 27-Sep-22, PFab 1-Line 1 - E&I Support Installat 27-Sep-22, PFab 1-Line 1 - E&I Ca Sep-22 08-Oct-22, PFab 1-Line 38-Oct-22, PFab 1-Line 06-Oct-22, PFab 1-Line 38-Oct-22, PFab 1-Line	
P imary & Secondary Steel Structure Fabricate (Beam/Cloumn/Plate.etc), 0 1 - 4th Floor(EL37.72m - EL47.22m) Primary & Secondary Steel Structure   PFab 1-Line 1 Mechanical Installation - 1st Floor (Below EL20.47 PFab 1-Line 1 Mechanical Installation - 2nd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 - Piping Fabrication, 07-Sep-22, 07-Sep-22, PFab 17-Sep-22, PFab 1-Line 1 - E&I Support Installat 27-Sep-22, PFab 1-Line 1 - E&I Support Installat 27-Sep-22, PFab 1-Line 1 - E&I Ca Sep-22 08-Oct-22, PFab 1-Line 38-Oct-22, PFab 1-Line 06-Oct-22, PFab 1-Line 38-Oct-22, PFab 1-Line	
Prab 1-Line 1 Mechanical Installation - 1st Floor (Below EL20.47 PFab 1-Line 1 Mechanical Installation - 1st Floor (Below EL20.47 PFab 1-Line 1 Mechanical Installation - 1st Floor (Below EL20.47 PFab 1-Line 1 Mechanical Installation - 2nd Floor(EL20.47m~EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m~EL2 PFab 1-Line 1 Piping Fabrication, 07-Sep-22, 07-Sep-22, PFab 17-Sep-22, PFab 1-Line 1 - E&I Support Installat 27-Sep-22, PFab 1-Line 1 - E&I Support Installat 27-Sep-22, PFab 1-Line 1 - E&I Ca Sep-22 08-Oct-22, PFab 1-Line Sep-22	
Prab 1-Line 1 Mechanical Installation - 1st Floor (Below EL20.47 PFab 1-Line 1 Mechanical Installation - 1st Floor (Below EL20.47 PFab 1-Line 1 Mechanical Installation - 1st Floor (Below EL20.47 PFab 1-Line 1 Mechanical Installation - 2nd Floor(EL20.47m~EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m~EL2 PFab 1-Line 1 Piping Fabrication, 07-Sep-22, 07-Sep-22, PFab 17-Sep-22, PFab 1-Line 1 - E&I Support Installat 27-Sep-22, PFab 1-Line 1 - E&I Support Installat 27-Sep-22, PFab 1-Line 1 - E&I Ca Sep-22 08-Oct-22, PFab 1-Line Sep-22	
P imary & Secondary Steel Structure Fabricate (Beam/Cloumn/Plate.etc), 0 1 - 4th Floor(EL37.72m - EL47.22m) Primary & Secondary Steel Structure   PFab 1-Line 1 Mechanical Installation - 1st Floor (Below EL20.47 PFab 1-Line 1 Mechanical Installation - 2nd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 - Piping Fabrication, 07-Sep-22, 07-Sep-22, PFab 17-Sep-22, PFab 1-Line 1 - E&I Support Installat 27-Sep-22, PFab 1-Line 1 - E&I Support Installat 27-Sep-22, PFab 1-Line 1 - E&I Ca Sep-22 08-Oct-22, PFab 1-Line 38-Oct-22, PFab 1-Line 06-Oct-22, PFab 1-Line 38-Oct-22, PFab 1-Line	
P imary & Secondary Steel Structure Fabricate (Beam/Cloumn/Plate.etc), 0 1 - 4th Floor(EL37.72m - EL47.22m) Primary & Secondary Steel Structure   PFab 1-Line 1 Mechanical Installation - 1st Floor (Below EL20.47 PFab 1-Line 1 Mechanical Installation - 2nd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 - Piping Fabrication, 07-Sep-22, 07-Sep-22, PFab 17-Sep-22, PFab 1-Line 1 - E&I Support Installat 27-Sep-22, PFab 1-Line 1 - E&I Support Installat 27-Sep-22, PFab 1-Line 1 - E&I Ca Sep-22 08-Oct-22, PFab 1-Line 38-Oct-22, PFab 1-Line 06-Oct-22, PFab 1-Line 38-Oct-22, PFab 1-Line	2
P imary & Secondary Steel Structure Fabricate (Beam/Cloumn/Plate.etc), 0 1 - 4th Floor(EL37.72m - EL47.22m) Primary & Secondary Steel Structure   PFab 1-Line 1 Mechanical Installation - 1st Floor (Below EL20.47 PFab 1-Line 1 Mechanical Installation - 2nd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 - Piping Fabrication, 07-Sep-22, 07-Sep-22, PFab 17-Sep-22, PFab 1-Line 1 - E&I Support Installat 27-Sep-22, PFab 1-Line 1 - E&I Support Installat 27-Sep-22, PFab 1-Line 1 - E&I Ca Sep-22 08-Oct-22, PFab 1-Line 38-Oct-22, PFab 1-Line 06-Oct-22, PFab 1-Line 38-Oct-22, PFab 1-Line	
P imary & Secondary Steel Structure Fabricate (Beam/Cloumn/Plate.etc), 0 1 - 4th Floor(EL37.72m - EL47.22m) Primary & Secondary Steel Structure   PFab 1-Line 1 Mechanical Installation - 1st Floor (Below EL20.47 PFab 1-Line 1 Mechanical Installation - 2nd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 - Piping Fabrication, 07-Sep-22, 07-Sep-22, PFab 17-Sep-22, PFab 1-Line 1 - E&I Support Installat 27-Sep-22, PFab 1-Line 1 - E&I Support Installat 27-Sep-22, PFab 1-Line 1 - E&I Ca Sep-22 08-Oct-22, PFab 1-Line 38-Oct-22, PFab 1-Line 06-Oct-22, PFab 1-Line 38-Oct-22, PFab 1-Line	
P imary & Secondary Steel Structure Fabricate (Beam/Cloumn/Plate.etc), 0 1 - 4th Floor(EL37.72m - EL47.22m) Primary & Secondary Steel Structure   PFab 1-Line 1 Mechanical Installation - 1st Floor (Below EL20.47 PFab 1-Line 1 Mechanical Installation - 2nd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 - Piping Fabrication, 07-Sep-22, 07-Sep-22, PFab 17-Sep-22, PFab 1-Line 1 - E&I Support Installat 27-Sep-22, PFab 1-Line 1 - E&I Support Installat 27-Sep-22, PFab 1-Line 1 - E&I Ca Sep-22 08-Oct-22, PFab 1-Line 38-Oct-22, PFab 1-Line 06-Oct-22, PFab 1-Line 38-Oct-22, PFab 1-Line	
P imary & Secondary Steel Structure Fabricate (Beam/Cloumn/Plate.etc), 0 1 - 4th Floor(EL37.72m - EL47.22m) Primary & Secondary Steel Structure   PFab 1-Line 1 Mechanical Installation - 1st Floor (Below EL20.47 PFab 1-Line 1 Mechanical Installation - 2nd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m ~ EL2 PFab 1-Line 1 - Piping Fabrication, 07-Sep-22, 07-Sep-22, PFab 17-Sep-22, PFab 1-Line 1 - E&I Support Installat 27-Sep-22, PFab 1-Line 1 - E&I Support Installat 27-Sep-22, PFab 1-Line 1 - E&I Ca Sep-22 08-Oct-22, PFab 1-Line 38-Oct-22, PFab 1-Line 06-Oct-22, PFab 1-Line 38-Oct-22, PFab 1-Line	2
imary & Secondary Steel Structure Fabricate (Beam/Cloumn/Plate.etc), 0 1 - 4th Floor(EL37.72m-EL47.22m) Primary & Secondary Steel Structure PFab 1-Line 1 Mechanical Installation - 1st Floor (Below EL20.47 PFab 1-Line 1 Mechanical Installation - 2nd Floor(EL20.47m~EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m~EL2 PFab 1-Line 1 - Piping Fabrication, 07-Sep-22, 07-Sep-22, PFab 17-Sep-22, PFab 1-Line 1 - E&I Support Installat 27-Sep-22, PFab 1-Line 1 - E&I Support Installat Sep-22 08-Oct-22, PFab 1-Line 06-Oct-22, PFab 1-Line Sep-22 08-Oct-22, PFab 1-Line	9.03.01),
imary & Secondary Steel Structure Fabricate (Beam/Cloumn/Plate.etc), 0 1 - 4th Floor(EL37.72m-EL47.22m) Primary & Secondary Steel Structure PFab 1-Line 1 Mechanical Installation - 1st Floor (Below EL20.47 PFab 1-Line 1 Mechanical Installation - 2nd Floor(EL20.47m~EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m~EL2 PFab 1-Line 1 - Piping Fabrication, 07-Sep-22, 07-Sep-22, PFab 17-Sep-22, PFab 1-Line 1 - E&I Support Installat 27-Sep-22, PFab 1-Line 1 - E&I Support Installat Sep-22 08-Oct-22, PFab 1-Line 06-Oct-22, PFab 1-Line Sep-22 08-Oct-22, PFab 1-Line	
imary & Secondary Steel Structure Fabricate (Beam/Cloumn/Plate.etc), 0 1 - 4th Floor(EL37.72m-EL47.22m) Primary & Secondary Steel Structure PFab 1-Line 1 Mechanical Installation - 1st Floor (Below EL20.47 PFab 1-Line 1 Mechanical Installation - 2nd Floor(EL20.47m~EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m~EL2 PFab 1-Line 1 - Piping Fabrication, 07-Sep-22, 07-Sep-22, PFab 17-Sep-22, PFab 1-Line 1 - E&I Support Installat 27-Sep-22, PFab 1-Line 1 - E&I Ca Sep-22 08-Oct-22, PFab 1-Line Sep-22 08-Oct-22, PFab 1-Line 08-Oct-22, PFab 1-Line	
imary & Secondary Steel Structure Fabricate (Beam/Cloumn/Plate.etc), 0 1 - 4th Floor(EL37.72m-EL47.22m) Primary & Secondary Steel Structure PFab 1-Line 1 Mechanical Installation - 1st Floor (Below EL20.47 PFab 1-Line 1 Mechanical Installation - 2nd Floor(EL20.47m~EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m~EL2 PFab 1-Line 1 - Piping Fabrication, 07-Sep-22, 07-Sep-22, PFab 17-Sep-22, PFab 1-Line 1 - E&I Support Installat 27-Sep-22, PFab 1-Line 1 - E&I Support Installat Sep-22 08-Oct-22, PFab 1-Line 06-Oct-22, PFab 1-Line Sep-22 08-Oct-22, PFab 1-Line	
imary & Secondary Steel Structure Fabricate (Beam/Cloumn/Plate.etc), 0 1 - 4th Floor(EL37.72m-EL47.22m) Primary & Secondary Steel Structure PFab 1-Line 1 Mechanical Installation - 1st Floor (Below EL20.47 PFab 1-Line 1 Mechanical Installation - 2nd Floor(EL20.47m~EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m~EL2 PFab 1-Line 1 - Piping Fabrication, 07-Sep-22, 07-Sep-22, PFab 17-Sep-22, PFab 1-Line 1 - E&I Support Installat 27-Sep-22, PFab 1-Line 1 - E&I Ca Sep-22 08-Oct-22, PFab 1-Line Sep-22 08-Oct-22, PFab 1-Line 08-Oct-22, PFab 1-Line	
imary & Secondary Steel Structure Fabricate (Beam/Cloumn/Plate.etc), 0 1 - 4th Floor(EL37.72m-EL47.22m) Primary & Secondary Steel Structure PFab 1-Line 1 Mechanical Installation - 1st Floor (Below EL20.47 PFab 1-Line 1 Mechanical Installation - 2nd Floor(EL20.47m~EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m~EL2 PFab 1-Line 1 - Piping Fabrication, 07-Sep-22, 07-Sep-22, PFab 17-Sep-22, PFab 1-Line 1 - E&I Support Installat 27-Sep-22, PFab 1-Line 1 - E&I Ca Sep-22 08-Oct-22, PFab 1-Line Sep-22 08-Oct-22, PFab 1-Line 08-Oct-22, PFab 1-Line	
imary & Secondary Steel Structure Fabricate (Beam/Cloumn/Plate.etc), 0 1 - 4th Floor(EL37.72m-EL47.22m) Primary & Secondary Steel Structure PFab 1-Line 1 Mechanical Installation - 1st Floor (Below EL20.47 PFab 1-Line 1 Mechanical Installation - 2nd Floor(EL20.47m~EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m~EL2 PFab 1-Line 1 - Piping Fabrication, 07-Sep-22, 07-Sep-22, PFab 17-Sep-22, PFab 1-Line 1 - E&I Support Installat 27-Sep-22, PFab 1-Line 1 - E&I Ca Sep-22 08-Oct-22, PFab 1-Line Sep-22 08-Oct-22, PFab 1-Line 08-Oct-22, PFab 1-Line	
	Fab 1-Lir
PFab 1-Line 1 - Top Floor(EL47.22m~ EL5 PFab 1-Line 1 Mechanical Installation - 1st Floor (Below EL20.47 PFab 1-Line 1 Mechanical Installation - 2nd Floor(EL20.47m~EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL20.47m~EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL26.72m~EL2 PFab 1-Line 1 Mechanical Installation - 4th Floor PFab 1-Line 1 Mechanical Installation - 4th Floor PFab 1-Line 1 Piping Fabrication, 07-Sep-22, 07-Sep-22, PFab 17-Sep-22, PFab 1-Line 1 - E&I Support Installat 27-Sep-22, PFab 1-Line 1 - E&I Support Installat 08-Oct-22, PFab 1-Line Sep-22 08-Oct-22, PFab 1-Line	5-Aug-22
PFab 1-Line 1 Mechanical Installation - 1st Floor (Below EL20.47 PFab 1-Line 1 Mechanical Installation - 2nd Floor(EL20.47m ~EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL26.72m ~EL2 PFab 1-Line 1 Mechanical Installation - 4th Floor PFab 1-Line 1 Mechanical Installation - 4th Floor PFab 1-Line 1 - Piping Fabrication, 07-Sep-22, 07-Sep-22, PFab 17-Sep-22, PFab 1-Line 1 - E&I Support Installat 27-Sep-22, PFab 1-Line 1 - E&I Support Installat Sep-22 08-Oct-22, PFab 1-Line Sep-22 08-Oct-22, PFab 1-Line	Erection,
PFab 1-Line 1 Mechanical Installation - 2nd Floor(EL20.47m~EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL26.72m~EL3 PFab 1-Line 1 Mechanical Installation - 4th Floor PFab 1-Line 1 Mechanical Installation - 4th Floor PFab 1-Line 1 - Piping Fabrication, 07-Sep-22, 07-Sep-22, PFa 17-Sep-22, PFab 1-Line 1 - E&I Support Installat 27-Sep-22, PFab 1-Line 1 - E&I Ca Sep-22 08-Oct-22, PFab 1-Line Sep-22 08-Oct-22, PFab 1-Line	4.47m)F
PFab 1-Line 1 Mechanical Installation - 2nd Floor(EL20.47m~EL2 PFab 1-Line 1 Mechanical Installation - 3rd Floor(EL26.72m~EL3 PFab 1-Line 1 Mechanical Installation - 4th Floor PFab 1-Line 1 Mechanical Installation - 4th Floor PFab 1-Line 1 - Piping Fabrication, 07-Sep-22, 07-Sep-22, PFa 17-Sep-22, PFab 1-Line 1 - E&I Support Installat 27-Sep-22, PFab 1-Line 1 - E&I Ca Sep-22 08-Oct-22, PFab 1-Line Sep-22 08-Oct-22, PFab 1-Line	
PFab 1-Line 1 Mechanical Installation - 3rd Floor( EL26.72m~EL3 PFab 1-Line 1 Mechanical Installation - 4th Floor PFab 1-Line 1 - Piping Fabrication, 07-Sep-22, 07-Sep-22, PFa 17-Sep-22, PFab 1-Line 1 - E&I Support Installat 27-Sep-22, PFab 1-Line 1 - E&I Ca Sep-22 08-Oct-22, PFab 1-Line Sep-22 08-Oct-22, PFab 1-Line	
PFab 1-Line 1 - Piping Fabrication, 07-Sep-22, 07-Sep-22, PFa 17-Sep-22, PFab 1-Line 1 - E&I Support Installat 27-Sep-22, PFab 1-Line 1 - E&I Ca Sep-22 08-Oct-22, PFab 1-Lin 06-Oct-22, PFab 1-Lin Sep-22 08-Oct-22, PFab 1-Lin	87.72m) (
17-Sep-22, PFab 1-Line 1 - E&I Support Installat 27-Sep-22, PFab 1-Line 1 - E&I Ca Sep-22 08-Oct-22, PFab 1 08-Oct-22, PFab 1 06-Oct-22, PFab 1-Lin Sep-22 08-Oct-22, PFab 1-Lin	(EL37.72
17-Sep-22, PFab 1-Line 1 - E&I Support Installat 27-Sep-22, PFab 1-Line 1 - E&I Ca Sep-22 08-Oct-22, PFab 1 08-Oct-22, PFab 1 06-Oct-22, PFab 1-Lin Sep-22 08-Oct-22, PFab 1-Lin	ab 1-l ine
27-Sep-22, PFab 1-Line 1 - E&I Ca -Sep-22 08-Oct-22, PFab 1- 08-Oct-22, PFab 1- 06-Oct-22, PFab 1-Lin Sep-22 08-Oct-22, PFab 1-Lin	
27-Sep-22, PFab 1-Line 1 - E&I Ca -Sep-22 08-Oct-22, PFab 1- 08-Oct-22, PFab 1- 06-Oct-22, PFab 1-Lin 06-Oct-22, PFab 1-Lin Sep-22 08-Oct-22, PFab 1	
27-Sep-22, PFab 1-Line 1 - E&I Ca -Sep-22 08-Oct-22, PFab 1- 08-Oct-22, PFab 1- 06-Oct-22, PFab 1-Lin 06-Oct-22, PFab 1-Lin Sep-22 08-Oct-22, PFab 1	
-Sep-22 08-Oct-22, PFab 1- 08-Oct-22, PFab 1- 06-Oct-22, PFab 1- 06-Oct-22, PFab 1-Lin Sep-22 08-Oct-22, PFab 1	ion
08-Oct-22, PFab 1- 08-Oct-22, PFab 1- 06-Oct-22, PFab 1-Lin Sep-22 08-Oct-22, PFab 1-	ble Ladd
08-Oct-22, PFab 1- 06-Oct-22, PFab 1-Lin Sep-22 08-Oct-22, PFab 1-	
-Sep-22 08-Oct-22, PFab 1-	
08-Oct-22, PFab 1-	e 1 - MC(
pr Prim ary & Secondary Steel Structure Fabricate (Beam/Cloumn/Plate.etc	
	08-Au
PFab 1-Line 2 - Top Floor(EL47.22m~EL54.47	),08-Au
	),08-Au
	),08-Au

KEPPEL SEGREDS - 2005 HUA JOINT V	ALC: N ALC: A AL										Integrated Waste Manageme
KEPPELSEGHERS - ZHEN BUAJOINT V	Activity Name	Original Duration	Remaining Duration	Activity Comple	Current Start	Current Finish	Late Start	Late Finish	Total Float M56 Remarks	Jul	Aug
06-TPU-2-1120	PFab 1-Line 2 - Mechanical Installation - 1st Floor (Below EL20.47m) (Inc	80	42	47.5%	6 04-Feb-22 A	10-Sep-22	15-Jun-22	26-Jul-22	-46	56	57
06-TPU-2-1130	PFab 1-Line 2 - Mechanical Installation - 2nd Floor(EL20.47m~EL26.72m	80	30		6 25-Feb-22 A	· ·	27-Jun-22	26-Jul-22	-46		
06-TPU-2-1140	PFab 1-Line 2 - Mechanical Installation - 3rd Floor( EL26.72m~EL37.72m	80	42	47.5%	6 06-May-22	10-Sep-22	15-Jun-22	26-Jul-22	-46		
06-TPU-2-1150	PFab 1-Line 2 - Mechanical Installation - 4th Floor(EL37.72m~EL47.22m)	80	52	35%	6 19-Jun-22 A	20-Sep-22	05-Jun-22	26-Jul-22	-56		
06-TPU-2-1240	PFab 1-Line 2 - Mechanical Installation - Boiler Lifting & Installation	80	58	27.5%	6 23-May-22	26-Sep-22	30-May-22	26-Jul-22	-62		
Piping Fabrication		180	11			10-Aug-22			-62		
06-TPU-2-1220	PFab 1-Line 2 - Piping Fabrication	180	11	93.89%	6 09-Mar-21 A	Ũ	-	09-Jun-22	-62		PFab 1-Line 2 - Piping
Piping Installation	DE-h 4 Line 0. Dising last-lining	150	103	04.000		10-Nov-22		09-Sep-22	-62		
06-TPU-2-1000     E&I Fabrication	PFab 1-Line 2 - Piping Installation	150 180	103 118	31.337	6 27-May-22	25-Nov-22	-	09-Sep-22 27-Sep-22	-62 -59		
06-TPU-2-1230	PFab 1-Line 2 - E&I Fabrication	180	118	34.44%	6 14-Apr-22 A			· · · ·	-59		
E&I Installation		115	115			25-Nov-22	02-Jun-22	24-Sep-22	-62		
06-TPU-2-1250	PFab 1-Line 2 - E&I Support Installation	45	45	0%	6 03-Aug-22*		02-Jun-22	16-Jul-22	-62		03-Aug-22*
06-TPU-2-1260	PFab 1-Line 2 - E&I Cable Ladder Erection	45	45	0%	6 10-Aug-22	23-Sep-22	09-Jun-22	23-Jul-22	-62		03-Aug-22* 10-Aug-22
Electrical		96	96		22-Aug-22	25-Nov-22	23-Jun-22	24-Sep-22	-62		
06-TPU-2-1270	PFab 1-Line 2 - Electrical Cable Pulling and Termination	80	80	0%	6 07-Sep-22	25-Nov-22	07-Jul-22	24-Sep-22	-62		
06-TPU-2-1280	PFab 1-Line 2 - Electrical Equipment Installation	45	45		6 24-Aug-22		23-Jun-22	06-Aug-22	-62		24-Aug-22
06-TPU-2-1290	PFab 1-Line 2 - Electrical Heat Tracing Installation	45	45		6 24-Aug-22		23-Jun-22	06-Aug-22	-62		24-Aug-22
06-TPU-2-1330	PFab 1-Line 2 - MCC room installation	45	45	0%	6 22-Aug-22*		23-Jun-22	06-Aug-22	-60		22-Aug-22*
		94	94		24-Aug-22		23-Jun-22	24-Sep-22	-62		
06-TPU-2-1300     06-TPU-0-1010	PFab 1-Line 2 - Instrument Cable Pulling and Termination	80	80		6 07-Sep-22		07-Jul-22	24-Sep-22	-62		04 Aur 00
<ul> <li>06-TPU-2-1310</li> <li>06-TPU-2-1320</li> </ul>	PFab 1-Line 2 - Instrument Equipment Installation PFab 1-Line 2 - Instrument Tubing Installation	45 45	45 45		6 24-Aug-22 6 24-Aug-22		23-Jun-22 23-Jun-22	06-Aug-22 06-Aug-22	-62		24-Aug-22 24-Aug-22 24-Aug-22
Insulation	Frab I-Line 2 - Instrument lubing instantation	45 150	45 148	07	-	25-Dec-22	30-May-22	-	-62		24-Aug-22
06-TPU-2-1010	PFab 1-Line 2 - Insulation	150	148	1.33%	6 22-May-22		30-May-22		-62		
Precommissioning		60	60	1100 /	11-Nov-22	09-Jan-23		08-Nov-22	-62		
06-TPU-2-1020	PFab 1-Line 2 - Pre-commissioning	60	60	0%				08-Nov-22	-62		
PFab 1- Line 3		574	198		26-Nov-20 A	13-Feb-23	09-Jun-22	07-Jan-23	-37		
Structure Fabrication		200	149		26-Nov-20 A	26-Dec-22	21-Jun-22	07-Jan-23	12		
06-TPU-3-1110	PFab 1-Line 3 - Tertiary Structure Fabrication	200	149		6 26-Nov-20 A			07-Jan-23	12		PFab 1-Line 3 - 4th & Top
06-TPU-3-1200	PFab 1-Line 3 - 4th & Top Floor Prim ary & Secondary Steel Structure Fat	109	9	91.74%	6 11-Nov-21 A	-	21-Jun-22		-40		PFab 1-Line 3 - 4th & Top
Structure Erection	DEah A Line O., Ond Elsey/El 00 47m, El 00 70m/ Drivery 0. O sean dans 6	276	153	000		30-Dec-22	09-Jun-22	07-Jan-23	8		
06-TPU-3-1060	PFab 1-Line 3 - 2nd Floor(EL20.47m~EL26.72m) Primary & Secondary S	60	12		6 11-Feb-22 A		09-Jun-22	20-Jun-22	-52		PFab 1-Line 3 - 2nd F
06-TPU-3-1070 06-TPU-3-1080	PFab 1-Line 3 - 3rd Floor( EL26.72m~EL37.72m)Primary & Secondary S PFab 1-Line 3 - 4th Floor(EL37.72m~EL47.22m) Primary & Secondary S	45 12	19 26		6 05-May-22	-	09-Jun-22 09-Jun-22	27-Jun-22 04-Jul-22	-52	11-Jul-22 A	PFab 1-Line
06-TPU-3-1090	PFab 1-Line 3 - Top Floor(EL47.22m~EL44.22m) Primary & Secondary S	39	39		6 09-Aug-22			04-Jul-22 08-Sep-22	-52	11-Jui-22 A	09-Aug-22
06-TPU-3-1100	PFab 1-Line 3 - Tertiary Structure Erection	90	153		6 14-Jan-22 A	· ·	08-Aug-22	· ·	8		00 Aug 22
Mechanical Erection		258	100	0,		12-Nov-22		21-Sep-22	-52		
06-TPU-3-1120	PFab 1-Line 3 - Mechanical Installation - 1st Floor (Below EL20.47m) (Inc	80	41	48.75%	6 03-Mar-22 A			21-Sep-22	12		
06-TPU-3-1130	PFab 1-Line 3 - Mechanical Installation - 2nd Floor(EL20.47m~EL26.72m	80	35	56.25%	6 13-May-22	09-Sep-22	18-Aug-22	21-Sep-22	12		
06-TPU-3-1140	PFab 1-Line 3 - Mechanical Installation - 3rd Floor( EL26.72m~EL37.72m	80	41	48.75%	6 17-Jun-22 A	09-Sep-22	12-Aug-22	21-Sep-22	12		
06-TPU-3-1150	PFab 1-Line 3 - Mechanical Installation - 4th Floor(EL37.72m~EL47.22m)	50	50	0%	6 11-Aug-22*	29-Sep-22	03-Aug-22	21-Sep-22	-8		11-Aug-22*
06-TPU-3-1240	PFab 1-Line 3 - Mechanical Installation - Boiler Lifting & Installation	80	80	0%	6 25-Aug-22	12-Nov-22	04-Jul-22	21-Sep-22	-52		25-Aug-22 💻
Piping Fabrication		180	6		09-Mar-21 A	05-Aug-22	09-Jun-22	14-Jun-22	-52		
06-TPU-3-1220	PFab 1-Line 3 - Piping Fabrication	180	6	96.67%	6 09-Mar-21 A	05-Aug-22	09-Jun-22	14-Jun-22	-52		PFab 1-Line 3 - Piping Fabric
Piping Installation		150	150		31-Jul-22	27-Dec-22	09-Jun-22	05-Nov-22	-52		
06-TPU-3-1000	PFab 1-Line 3 - Piping Installation	150	150	0%	6 31-Jul-22	27-Dec-22	09-Jun-22	05-Nov-22	-52		31-Jul-22
E&I Fabrication	DE-h 4 Line 0. E 01 E-heineting	180	129	00.000		06-Dec-22	29-Jul-22	04-Dec-22	-2		
06-TPU-3-1230	PFab 1-Line 3 - E&I Fabrication	180 115	129 115	28.33%	· ·	06-Dec-22 10-Jan-23	29-Jul-22 29-Jul-22	04-Dec-22 20-Nov-22	-2 -51		
E&I Installation 06-TPU-3-1250	PFab 1-Line 3 - E&I Support Installation	45	45	09	6 18-Sep-22*			11-Sep-22	-51		
06-TPU-3-1260	PFab 1-Line 3 - E&I Cable Ladder Erection	45	45		6 25-Sep-22			18-Sep-22	-51		
		102	102	0,	01-Oct-22	10-Jan-23	-	20-Nov-22	-51		
06-TPU-3-1270	PFab 1-Line 3 - Electrical Cable Pulling and Termination	80	80	0%	6 23-Oct-22	10-Jan-23		20-Nov-22	-51		
06-TPU-3-1280	PFab 1-Line 3 - Electrical Equipment Installation	45	45	0%	6 09-Oct-22	22-Nov-22	19-Aug-22	02-Oct-22	-51		
06-TPU-3-1290	PFab 1-Line 3 - Electrical Heat Tracing Installation	45	45	0%	6 09-Oct-22	22-Nov-22	19-Aug-22	02-Oct-22	-51		
🔲 06-TPU-3-1330	PFab 1-Line 3 - MCC room installation	45	45	0%	6 01-Oct-22*	14-Nov-22	19-Aug-22	02-Oct-22	-43		
lnstrument		94	94		09-Oct-22	10-Jan-23	19-Aug-22	20-Nov-22	-51		
06-TPU-3-1300	PFab 1-Line 3 - Instrument Cable Pulling and Termination	80	80	0%	6 23-Oct-22	10-Jan-23	02-Sep-22	20-Nov-22	-51		
06-TPU-3-1310	PFab 1-Line 3 - Instrument Equipment Installation	45	45		6 09-Oct-22	22-Nov-22	-	02-Oct-22	-51		
06-TPU-3-1320	PFab 1-Line 3 - Instrument Tubing Installation	45	45	0%	6 09-Oct-22	22-Nov-22	19-Aug-22		-51		
		150	150		17-Sep-22		27-Jul-22		-52		
06-TPU-3-1010	PFab 1-Line 3 - Insulation	150	150					23-Dec-22	-52		
PFab 1- Line 4 Structure Fabrication		590 200	208				20-Jun-22		-40		
		200	84		10-Dec-207	A 22-Oct-22	23-Oct-22	14-Jan-23	84		
	PEab 1-Line 4 - Tertiary Structure Exprication	200	<u>۸</u>	500	6 10-Dec-20	A 22-0rt-22	23-0ct-22	14-Jan-22	84		
06-TPU-4-1160	PFab 1-Line 4 - Tertiary Structure Fabrication	200 311	84 208	58%	6 10-Dec-20 /	A 22-Oct-22 A 23-Feb-23	23-Oct-22 20-Jun-22		-40		

# **3-Month Rolling Programme (July 2022)**

Page 7 of 15

Remaining Work Actual Work

Actual Milestone

♦ ♦ Critical Milestone

Critical Remaining Work

ct No. EP/SP/66/12 Facilities, Phase 1	環境保護署 Environmental Protaction Department
Sep	Oct
58 PFab 1-Line 2 - Mechar PFab 1-Line 2 - Mechar PFab 1-Line 2 - Mechar PFab 1-Line 2 - Mechar PFab 1-Li	59 ical Installation - 1st Floor (Below EL20.47m ical Installation - 2nd Floor (EL20.47m~EL26 ical Installation - 3rd Floor (EL26.72m~EL37 ne 2 - Mechanical Installation - 4th Floor (EL2 Fab 1-Line 2 - Mechanical Installation - Boile
rication, 10-Aug-22, 10-Aug-22, PFab 1-	
	ib 1-Line 2 - E&I Support Installation p-22, PFab 1-Line 2 - E&I Cable Ladder Ere
Sep-22	07-Oct-22, PFab 1-Line 2 - Ele 07-Oct-22, PFab 1-Line 2 - Ele 05-Oct-22, PFab 1-Line 2 - MCC r
	07-Oct-22, PFab 1-Line 2 - Ins 07-Oct-22, PFab 1-Line 2 - Ins
(EL20.47m~EL26.72m) Primary & Secc 3rd Floor( EL26.72m~EL37.72m)Prima 1-Line 3 - 4th Floor(EL37.72m~EL47.22	Fabricate (Beam/Cloumn/Plate.etc), 08-Aug andary Steel Structure Erection, 11-Aug-22, 1 ry & Secondary Steel Structure Erection, 18- m) Primary & Secondary Steel Structure Erection, 18- b) 1-Line 3 - Top Floor(EL4722m ~EL54.47 m
09-Sep-22, PFab 1-Line 3	Mechanical Installation - 1st Floor (Below     Mechanical Installation - 2nd Floor(EL20.     Mechanical Installation - 3rd Floor(EL26.     29-Sep-22, PFab 1-Line 3 - Mechanical In
n, 05-Aug-22, 05-Aug-22, PFab 1-Line 3	Piping Fabrication
18-Sep-22*	
25-Sep-22	23-Oct-22 99-Oct-22 09-Oct-22
	23-Oct-22 09-Oct-22 09-Oct-22
17-Sep-22	
rd Floor( EL26.72m~EL37.72m)Primary	& Secondary Steel Structure Erection, 17-A

Keppel Seghers									late averte d	Coi
5 首 当 修 政 一 初 単 増 へ KEPPEL SEGIERS - ZHEN HUATOINT		Original	Remaining	Activity % Current Start	Current Finish	Late Start	Late Finish	Total Float M56 Remarks		Waste Managen
		Duration	Duration	Complete					Jul 56	Aug 57
06-TPU-4-1130	PFab 1-Line 4 - 4th Floor(EL37.72m~EL47.22m) Primary & Secondary S	30	21	30% 20-Apr-22 A	22-Aug-22	22-Jun-22	12-Jul-22	-41		PFa
06-TPU-4-1140	PFab 1-Line 4 - Top Floor(EL47.22m~EL54.47m) Prim ary & Secondary S	40	40	0% 23-Aug-22	01-Oct-22	13-Jul-22	21-Aug-22	-41		23-Aug-22
06-TPU-4-1150	PFab 1-Line 4 - Tertiary Structure Erection	90	208	0% 01-Apr-22 A		21-Jun-22	14-Jan-23	-40		
Mechanical Erection 06-TPU-4-1040	PFab 1-Line 4 - Mechanical Installation - 1st Floor (Below EL20.47m) (Inc	290 80	102 61	09-Jan-22 A 23.75% 09-Jan-22 A		12-Jul-22 31-Jul-22	29-Sep-22 29-Sep-22	-41		
06-TPU-4-1050	PFab 1-Line 4 - Mechanical Installation - 2nd Floor (EL20.47m~EL26.72m	80	40	50% 21-Feb-22 A		21-Aug-22	29-Sep-22 29-Sep-22	0		
06-TPU-4-1060	PFab 1-Line 4 - Mechanical Installation - 3rd Floor(EL26.72m~EL37.72rr	80	61	23.75% 06-May-22	29-Sep-22	31-Jul-22	29-Sep-22	0		
06-TPU-4-1070	PFab 1-Line 4 - Mechanical Installation - 4th Floor(EL37.72m~EL47.22m)	80	80	0% 15-Aug-22*	02-Nov-22	12-Jul-22	29-Sep-22	-34		15-Aug-22*
06-TPU-4-1080	PFab 1-Line 4 - Mechanical Installation - Boiler Pre Assembly	125	6	95.2% 25-Feb-22 A	05-Aug-22	16-Aug-22	22-Aug-22	17		05-Aug-22, PFab 1-Line 4
06-TPU-4-1240	PFab 1-Line 4 - Mechanical Installation - Boiler Lifting & Installation	108	39	63.89% 05-Jul-22 A	09-Nov-22	22-Aug-22	29-Sep-22	-41	2 A	
Piping Fabrication		180	25	09-Mar-21 A	<b>U</b>	09-Jul-22	02-Aug-22	-22		
06-TPU-4-1220	PFab 1-Line 4 - Piping Fabrication	180	25	86.11% 09-Mar-21 A	-	09-Jul-22	02-Aug-22	-22	[	
Piping Installation	DEak 1 Line 4. Dising lastellation	150	150	19-Aug-22		09-Jul-22	05-Dec-22	-41		10 Aug 00
06-TPU-4-1000	PFab 1-Line 4 - Piping Installation	150 180	150 100	0% 19-Aug-22 14-Apr-22A	15-Jan-23	09-Jul-22	05-Dec-22 15-Nov-22	-41		19-Aug-22
E&I Fabrication 06-TPU-4-1230	PFab 1-Line 4 - E&I Fabrication	180	100	44.44% 14-Apr-22 A			15-Nov-22	8		
E&I Installation		163	163	31-Jul-22	09-Jan-23	-	30-Nov-22	-40		
06-TPU-4-1250	PFab 1-Line 4 - E&I Support Installation	45	45	0% 31-Jul-22*	14-Sep-22	-	21-Sep-22	8	31-Jul-22*	
06-TPU-4-1260	PFab 1-Line 4 - E&I Cable Ladder Erection	45	45	0% 24-Sep-22	07-Nov-22	15-Aug-22	28-Sep-22	-40		
Electrical		94	94	08-Oct-22	09-Jan-23		30-Nov-22	-40		
06-TPU-4-1270	PFab 1-Line 4 - Electrical Cable Pulling and Termination	80	80	0% 22-Oct-22	09-Jan-23	· ·	30-Nov-22	-40		
06-TPU-4-1280	PFab 1-Line 4 - Electrical Equipment Installation	45	45	0% 08-Oct-22	21-Nov-22	-	12-Oct-22	-40		
06-TPU-4-1290	PFab 1-Line 4 - Electrical Heat Tracing Installation	45	45	0% 08-Oct-22	21-Nov-22	29-Aug-22	12-Oct-22	-40		
06-TPU-4-1330	PFab 1-Line 4 - MCC room installation	45	45	0% 08-Oct-22*	21-Nov-22	-	12-Oct-22	-40		
<b>Instrument</b> 06-TPU-4-1300	PFab 1-Line 4 - Instrument Cable Pulling and Termination	94 80	94 80	08-Oct-22 0% 22-Oct-22	09-Jan-23 09-Jan-23		30-Nov-22 30-Nov-22	-40 -40		
06-TPU-4-1310	PFab 1-Line 4 - Instrument Equipment Installation	45	45	0% 22-Oct-22	21-Nov-22	· ·	12-Oct-22	-40		
06-TPU-4-1320	PFab 1-Line 4 - Instrument Tubing Installation	45	45	0% 08-Oct-22	21-Nov-22	-	12-Oct-22	-40		
Insulation		150	150	13-Sep-22	09-Feb-23	-	30-Dec-22	-41		
06-TPU-4-1010	PFab 1-Line 4 - Insulation	150	150	0% 13-Sep-22	09-Feb-23	-	30-Dec-22	-41		
PFab 1- Line 5		655	279	23-Mar-21 A	05-May-23	26-May-22	15-Mar-23	-51		
Structure Erection		321	223	14-Jan-22 A		26-May-22	15-Mar-23	5		
9 06-TPU-5-1110	PFab 1-Line 5 - 2nd Floor(EL20.47m~EL26.72m) Primary & Secondary S	60	16	73.33% 12-Mar-22 A	-		10-Jun-22	-66	[	PFab 1-Lin
06-TPU-5-1120	PFab 1-Line 5 - 3rd Floor( EL26.72m~EL37.72m)Primary & Secondary S	45	45	0% 31-Jul-22	13-Sep-22	26-May-22	-	-66	31-Jul-22	
06-TPU-5-1130	PFab 1-Line 5 - 4th Floor(EL37.72m~EL47.22m) Primary & Secondary S	30	30	0% 24-Aug-22	22-Sep-22	19-Jun-22	18-Jul-22	-66		24-Aug-22
06-TPU-5-1140	PFab 1-Line 5 - Top Floor(EL47.22 m~ EL54.47m) Prim ary & Secondary S	30	30	0% 23-Sep-22	22-Oct-22	19-Jul-22	17-Aug-22	-66		
06-TPU-5-1150	PFab 1-Line 5 - Tertiary Structure Erection	90 317	223 164	0% 14-Jan-22 A 02-Mar-22 A		05-Aug-22	15-Mar-23 05-Nov-22	-66		
Mechanical Erection 06-TPU-5-1040	PFab 1-Line 5 - Mechanical Installation - 1st Floor (Below EL20.47m) (Inc	80	51	36.25% 02-Mar-22 A			05-Nov-22	-66		
06-TPU-5-1050	PFab 1-Line 5 - Mechanical Installation - 2nd Floor (EL20.47m~EL26.72m	80	80	0% 05-Aug-22*	23-Oct-22	· ·	05-Nov-22	13	05-Aug-22*	
06-TPU-5-1060	PFab 1-Line 5 - Mechanical Installation - 3rd Floor(EL26.72m~EL37.72m	80	80	0% 30-Aug-22		-	05-Nov-22	-12		
06-TPU-5-1070	PFab 1-Line 5 - Mechanical Installation - 4th Floor(EL37.72m~EL47.22m)	80	80		26-Nov-22	-	05-Nov-22	-21		
06-TPU-5-1080	PFab 1-Line 5 - Mechanical Installation - Boiler Pre-Assembly	110	84	23.64% 16-May-22		-	17-Aug-22	-66		
06-TPU-5-1240	PFab 1-Line 5 - Mechanical Installation - Boiler Lifting & Installation	80	80	0% 23-Oct-22	10-Jan-23	18-Aug-22	05-Nov-22	-66		
Piping Fabrication		180	22	23-Mar-21 A	21-Aug-22	24-Jul-22	14-Aug-22	-7		
06-TPU-5-1220	PFab 1-Line 5 - Piping Fabrication	180	22	87.78% 23-Mar-21 A	21-Aug-22	24-Jul-22	14-Aug-22	-7		PF
Piping Installation		150	150		24-Feb-23	24-Jul-22	20-Dec-22	-66		
06-TPU-5-1000	PFab 1-Line 5 - Piping Installation	150	150	0% 28-Sep-22		24-Jul-22	20-Dec-22	-66		
E&I Fabrication	DE-h 4 Line E - E01 E-heinstier	180	153		30-Dec-22		26-Feb-23	58		
06-TPU-5-1230     E&I Installation	PFab 1-Line 5 - E&I Fabrication	180 76	153 76	15% 14-Apr-22 A			26-Feb-23 01-Dec-22	-66		
06-TPU-5-1250	PFab 1-Line 5 - E&I Support Installation	45	45	22-Nov-22 0% 02-Dec-22*	05-Feb-23	· ·	10-Nov-22	-66		
06-TPU-5-1260	PFab 1-Line 5 - E&I Cable Ladder Erection	45	45	0% 09-Dec-22	22-Jan-23	04-Oct-22	17-Nov-22	-66		
		76	76	22-Nov-22	05-Feb-23	18-Oct-22	01-Dec-22	-66		
06-TPU-5-1280	PFab 1-Line 5 - Electrical Equipment Installation	45	45	0% 23-Dec-22			01-Dec-22	-66		
06-TPU-5-1290	PFab 1-Line 5 - Electrical Heat Tracing Installation	45	45	0% 23-Dec-22	05-Feb-23	18-Oct-22	01-Dec-22	-66		
06-TPU-5-1330	PFab 1-Line 5 - MCC room installation	45	45	0% 22-Nov-22*	05-Jan-23	18-Oct-22	01-Dec-22	-35		
Instrument		45	45		05-Feb-23	18-Oct-22	01-Dec-22	-66		
06-TPU-5-1310	PFab 1-Line 5 - Instrument Equipment Installation	45	45		05-Feb-23	18-Oct-22	01-Dec-22	-66		
06-TPU-5-1320	PFab 1-Line 5 - Instrument Tubing Installation	45	45		05-Feb-23		01-Dec-22	-66		
	DEsk 4 Line 5 Jacobaile	150	150		05-May-23	02-Oct-22	28-Feb-23	-66		
06-TPU-5-1010	PFab 1-Line 5 - Insulation	150	150	0% 07-Dec-22	-		28-Feb-23	-66		
PFab 1- Line 6		632 302	256			25-Jun-22	22-Mar-23 22-Mar-23	-21		
Structure Erection 06-TPU-6-1110	PFab 1-Line 6 - 2nd Floor(EL20.47m~EL26.72m) Primary & Secondary S	302 60	244 13	78.33% 08-Apr-22 A	31-Mar-23	25-Jun-22 25-Jun-22	22-Mar-23 07-Jul-22	-9 -36		PFab 1-Line 6
06-TPU-6-1120	PFab 1-Line 6 - 3rd Floor(EL26.72m~EL37.72m)Primary & Secondary S	45	18	60% 24-Jun-22 A	-	30-Jun-22	17-Jul-22	-36		P
06-TPU-6-1130	PFab 1-Line 6 - 4th Floor(EL37.72m~EL47.22m) Primary & Secondary S	30	30	0% 23-Aug-22	-	18-Jul-22	16-Aug-22	-36		23-Aug-22
-	PFab 1-Line 6 - Top Floor(EL47.22m~EL54.47m) Primary & Secondary S	30	30	0% 23-Aug-22 0% 22-Sep-22			15-Sep-22	-36		23-Aug-22
06-TPU-6-1140										

Remaining Work Actual Work

Critical Milestone

٠

Critical Remaining Work

Facilities, Phase 1	2 環境保護署 Environmental Protection Department
2 Sep 58 ie 4 - 4th Floor(EL37.72m~EL47.22	Oct 59 m) Primary & Secondary Steel Structure Erectic 01-Oct-22, PFab 1-Line 4 - Top Floor(E
	PFab 1-Line 4 - Mechanical Installation - PFab 1-Line 4 - Mechanical Installation - PFab 1-Line 4 - Mechanical Installation -
nical Installation - Boiler Pre Asser	mbly, PFab1-Line 4 - Mechanical Installation - B
Line 4 - Piping Fabrication, 24-Aug	-22, 24-Aug-22, PFab 1-Line 4 - Piping Fabricati
14-Sep-22, PF 24-Sep-22	ab 1-Line 4 - E&I Support Installation
	22-Oct-22 08-Oct-22 08-Oct-22
	08-Oct-22* 22-Oct-22 08-Oct-22
13-Sep-22	08-Oct-22
	ary & Secondary Steel Structure Erection, 15-Au ab 1-Line 5 - 3rd Floor( EL26.72m~EL37.72m)Pr
22- 23-Sep-22	
22- 23-Sep-22	-Sep-22, PFab 1-Line 5 - 4th Floor(EL37.72m~E 22-Oct-22 
22- 23-Sep-22 19-Sep Sep-22	-Sep-22, PFab 1-Line 5 - 4th Floor(EL37.72m~E 22-Oct-22 -22, PFab 1-Line 5 - Mechanical Installation - 1s 23-Oct-1 23-Oct-22 23-Oct-22 21-Aug-22, PFab 1-Line 5 - Piping Fabrication
22- 23-Sep-22 19-Sep Sep-22 5 - Piping Fabrication, 21-Aug-22,	-Sep-22, PFab 1-Line 5 - 4th Floor(EL37.72m~E 22-Oct-22 -22, PFab 1-Line 5 - Mechanical Installation - 1s 23-Oct-2 PFab 1-Line 5 - Mechanical Installation - 1s 23-Oct-22 21-Aug-22, PFab 1-Line 5 - Piping Fabrication
22- 23-Sep-22 19-Sep -Sep-22 5 - Piping Fabrication, 21-Aug-22,	-Sep-22, PFab 1-Line 5 - 4th Floor(EL37.72m~E 22-Oct-22 -22, PFab 1-Line 5 - Mechanical Installation - 1s 23-Oct-2 PFab 1-Line 5 - Mechanical Installation - 1s 23-Oct-22 21-Aug-22, PFab 1-Line 5 - Piping Fabrication
22- 23-Sep-22 19-Sep -Sep-22 5 - Piping Fabrication, 21-Aug-22,	-Sep-22, PFab 1-Line 5 - 4th Floor(EL37.72m~E 22-Oct-22 -22, PFab 1-Line 5 - Mechanical Installation - 1s 23-Oct-2 PFab 1-Line 5 - Mechanical Installation - 1s 23-Oct-22 21-Aug-22, PFab 1-Line 5 - Piping Fabrication
22- 23-Sep-22 19-Sep -Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-22 28-Sep-23-Sep-22 28-Sep-23 28-Sep-23 28-Sep	-Sep-22, PFab 1-Line 5 - 4th Floor(EL37.72m~E 22-Oct-22 -22, PFab 1-Line 5 - Mechanical Installation - 1s 23-Oct-2 PFab 1-Line 5 - Mechanical Installation - 1s 23-Oct-22 21-Aug-22, PFab 1-Line 5 - Piping Fabrication

KEPPEL SEGRERS - ZHEN HUAJOINT VENT	Activity Name	Original Duration	Remaining Duration	Activity % Current Start Complete	Current Finish	Late Start	Late Finish	Total Float M56 Remarks	Jul	Aug 2022
06-TPU-6-1150	PFab 1-Line 6 - Tertiary Structure Erection	144	244	0% 15-Apr-2	2 A 31-Mar-23	22-Jul-22	22-Mar-23	-9	56	57
Mechanical Erection		316	163	· ·	2A 09-Jan-23	20-Jul-22	04-Dec-22	-36		
06-TPU-6-1160	PFab 1-Line 6 - Mechanical Installation - 1st Floor (Below EL20.47m) (Inc	80	55	31.25% 03-Mar-2		16-Sep-22	09-Nov-22	47		
06-TPU-6-1170	PFab 1-Line 6 - Mechanical Installation - 2nd Floor(EL20.47m~EL26.72m	80	53	33.75% 20-May-2	2. 21-Sep-22	16-Sep-22	07-Nov-22	47		A
06-TPU-6-1180	PFab 1-Line 6 - Mechanical Installation - 3rd Floor( EL26.72m~EL37.72rr	80	80	0% 02-Aug-2	2* 20-Oct-22	16-Sep-22	04-Dec-22	45	02-Aug-22	
06-TPU-6-1190	PFab 1-Line 6 - Mechanical Installation - 4th Floor(EL37.72m~EL47.22m)	80	80	0% 07-Sep-2		16-Sep-22		9		07-Se
06-TPU-6-1200	PFab 1-Line 6 - Mechanical Installation - Boiler Pre Assembly	105	58	44.76% 14-Jun-22	· ·	20-Jul-22	15-Sep-22	-11		4
06-TPU-6-1240	PFab 1-Line 6 - Mechanical Installation - Boiler Lifting & Installation	80	80	0% 22-Oct-22			04-Dec-22	-36		
Piping Fabrication     06-TPU-6-1220	PFab 1-Line 6 - Piping Fabrication	180 180	22 22	23-Mar-2 87.78% 23-Mar-2	A 21-Aug-22	-	12-Sep-22 12-Sep-22	22		21-Aug-22, P
Piping Installation		150	150		2 23-Feb-23	22-Aug-22 22-Aug-22	-	-36		21-Aug-22, F
06-TPU-6-1000	PFab 1-Line 6 - Piping Installation	150	150		2 23-Feb-23	-	18-Jan-23	-36		
E&I Fabrication		180	124	· ·	A 01-Dec-22	14-Oct-22		75		
06-TPU-6-1230	PFab 1-Line 6 - E&I Fabrication	180	124	31.11% 14-Apr-22			14-Feb-23	75		
E&I Installation		52	52	19-Nov-2	2 09-Jan-23	14-Oct-22	04-Dec-22	-36		
06-TPU-6-1250	PFab 1-Line 6 - E&I Support Installation	45	45	0% 19-Nov-2	2* 02-Jan-23	14-Oct-22	27-Nov-22	-36		
06-TPU-6-1260	PFab 1-Line 6 - E&I Cable Ladder Erection	45	45	0% 26-Nov-2		21-Oct-22	04-Dec-22	-36		
	PErk 4 Line 0 MOO mensionatellation	45	45	21-Nov-22		16-Oct-22	29-Nov-22	-36		
06-TPU-6-1330	PFab 1-Line 6 - MCC room installation	45 150	45 150	0% 21-Nov-2		16-Oct-22	29-Nov-22 07-Mar-23	-36 -36		
<b>Insulation</b> 06-TPU-6-1010	PFab 1-Line 6 - Insulation	150	150	14-Nov-22 0% 14-Nov-22		09-Oct-22 09-Oct-22	07-Mar-23 07-Mar-23	-36		
Fabrication of Module (FGC)		648	252		A 08-Apr-23			-12		
PFab 2 - Line 1		571	195		1. 10-Feb-23		23-Dec-22	-49		
Structure Fabrication		188	68	31-Mar-2	2A 06-Oct-22	11-Sep-22	17-Nov-22	42		
06-FGC-1-1110	PFab 2-Line 1 - Tertiary Structure Fabrication	188	68	63.83% 31-Mar-2		11-Sep-22	17-Nov-22	42		
Structure Erection		189	85		2 A 23-Oct-22	09-Jun-22		61		PFab 2-Line 1 - 3rd Floor(EL23.4
06-FGC-1-1030	PFab 2-Line 1 - 3rd Floor(EL23.47~ EL34.47m) Primary & Secondary Ste	60	8	86.67% 15-Mar-2		09-Jun-22	16-Jun-22	-52		
06-FGC-1-1040	PFab 2-Line 1 - 4th Floor (EL34.47~ EL44.22m) Primary & Secondary Stu	60	25	58.33% 11-Apr-22		24-Jul-22	17-Aug-22	-7		PFab 2-L
06-FGC-1-1050	PFab 2-Line 1 - Top Floor Primary & Secondary Steel Structure Erection	60 256	60 75	· · ·	2 23-Oct-22 2A 13-Oct-22	25-Oct-22 08-Aug-22	23-Dec-22	-7		25-Aug-22
Mechanical Erection 06-FGC-1-1070	PFab 2-Line 1 - 1st Floor (Below EL12.47m) (Including Silencer ID fan)	256 60	19	68.33% 07-Jan-22		-	06-Oct-22 06-Oct-22	49		18-Aug-22, PFab
06-FGC-1-1080	PFab 2-Line 1 - 2nd Floor (EL12.47~ EL23.47m) (Including Dosing system	60	60		2A 28-Sep-22	08-Aug-22		8		
06-FGC-1-1090	PFab 2-Line 1 - 3rd Floor (EL23.47~ EL34.47m) (Including As h and resid	60	60	0% 06-May-2	· ·	08-Aug-22		0		
06-FGC-1-1100	PFab 2-Line 1 - 4th Floor (EL34.47~ EL44.22m) (Including Urea to ammo	50	50	0% 03-Jun-22			06-Oct-22	-7		
Piping Fabrication		180	116	29-May-2		24-Jun-22	17-Oct-22	-37		
06-FGC-1-1210	PFab 2-Line 1 - Piping Fabrication	180	116	35.56% 29-May-2	1. 23-Nov-22	24-Jun-22	17-Oct-22	-37		1
Piping Installation		150	150	19-Aug-2	2 15-Jan-23	24-Jun-22	20-Nov-22	-56		
06-FGC-1-1120	PFab 2-Line 1 - Piping Installation	150	150	· · ·	2* 15-Jan-23	24-Jun-22	20-Nov-22	-56		19-Aug-22*
E&I Fabrication	DEsk O Line 4 - EQLEskrineting	180	149		A 26-Dec-22	25-Jun-22	20-Nov-22	-36		
06-FGC-1-1220	PFab 2-Line 1 - E&I Fabrication	180	149	17.22% 14-Apr-22		25-Jun-22	20-Nov-22	-36		
E&I Installation 06-FGC-1-1230	PFab 2-Line 1 - E&I Support Installation	115 45	115 45		2 12-Dec-22 2* 03-Oct-22	25-Jun-22 25-Jun-22	17-Oct-22 08-Aug-22	-56 -56		20-Aug-22*
06-FGC-1-1240	PFab 2-Line 1 - E&I Cable Ladder Erection	45	45		2 10-Oct-22	02-Jul-22	15-Aug-22	-56		27-Aug-22
		98	98		2 12-Dec-22		17-Oct-22	-56		
06-FGC-1-1250	PFab 2-Line 1 - Electrical Cable Pulling and Termination	80	80	· · · · ·	2 12-Dec-22		17-Oct-22	-56		
06-FGC-1-1260	PFab 2-Line 1 - Electrical Equipment Installation	45	45	0% 10-Sep-2		16-Jul-22	29-Aug-22	-56		1
96-FGC-1-1270	PFab 2-Line 1 - Electrical Heat Tracing Installation	45	45	0% 10-Sep-2	2 24-Oct-22	16-Jul-22	29-Aug-22	-56		1
06-FGC-1-1310	PFab 2-Line 1 - MCC room installation	45	45	0% 06-Sep-2	2 20-Oct-22	16-Jul-22	29-Aug-22	-52		06-Sep
Hanger Instrument		94	94	10-Sep-2	2 12-Dec-22	16-Jul-22	17-Oct-22	-56		
06-FGC-1-1280	PFab 2-Line 1 - Instrument Cable Pulling and Termination	80	80	0% 24-Sep-2	2 12-Dec-22	30-Jul-22	17-Oct-22	-56		
06-FGC-1-1290	PFab 2-Line 1 - Instrument Equipment Installation	45	45	0% 10-Sep-2		16-Jul-22	29-Aug-22	-56		1
06-FGC-1-1300	PFab 2-Line 1 - Instrument Tubing Installation	45	45	·	2 24-Oct-22	16-Jul-22	29-Aug-22	-56		1
		150	150		2 26-Jan-23	05-Jul-22	01-Dec-22	-56		
06-FGC-1-1130	PFab 2-Line 1 - Insulation	150	150		2 26-Jan-23	05-Jul-22	01-Dec-22	-56		30-Aug-22
Precommissioning 06-FGC-1-1190	PFab 2-Line 1 - Pre-commissioning	60 60	60 60	13-Dec-2	2 10-Feb-23 2 10-Feb-23	18-Oct-22 18-Oct-22		-56 -56		
PFab 2 - Line 2	Frab 2-Line T - Fle-commissioning	580	184		A 30-Jan-23		03-Jan-23	-28		
Structure Fabrication		180	53		A 21-Sep-22			13		
06-FGC-2-1040	PFab 2-Line 2 - Tertiary Structure Fabrication	180	53	70.56% 22-Oct-21				13		
Structure Erection		265	143		2A 20-Dec-22	-	03-Jan-23	13		
06-FGC-2-1080	PFab 2-Line 2 - 3rd Floor(EL23.47~ EL34.47m) Primary & Secondary Ste	60	16	73.33% 16-Mar-2		07-Jul-22	23-Jul-22	-24		PEab 2-Line 2 - 3rd E
06-FGC-2-1090	PFab 2-Line 2 - 4th Floor (EL34.47~ EL44.22m) Primary & Secondary Stu	60	35	41.67% 09-Apr-22	2A 03-Sep-22	24-Jul-22	28-Aug-22	-7		
06-FGC-2-1100	PFab 2-Line 2 - Top Floor Primary & Secondary Steel Structure Erection	60	60	0% 04-Sep-2	2 02-Nov-22	14-Oct-22	13-Dec-22	40		04-Sep-2
06-FGC-2-1110	PFab 2-Line 2 - Tertiary Structure Erection	90	90	0% 22-Sep-2	2 20-Dec-22	05-Oct-22	03-Jan-23	13		
Mechanical Erection		272	85		2A 23-Oct-22	28-Aug-22		-7		
06-FGC-2-1120	PFab 2-Line 2 - 1st Floor (Below EL12.47m) (Including Silencer ID fan)	60	27	55% 02-Jan-22		20-Sep-22		51		26-Aug
06-FGC-2-1130	PFab 2-Line 2 - 2nd Floor (EL12.47~ EL23.47m) (Including Dosing syster	60	32	46.67% 25-Feb-2	2 A 31-Aug-22	15-Sep-22	17-Oct-22	46		
06-FGC-2-1140	PFab 2-Line 2 - 3rd Floor (EL23.47~ EL34.47m) (Including As h and resid	60	29	51.67% 06-May-2			17-Oct-22	33		

3-Month Rolling Pr	ogramme (July	<mark>2022</mark> )
--------------------	---------------	---------------------

Page 9 of 15

Remaining Work Actual Work

Actual Milestone **◇** 

Critical Milestone

Critical Remaining Work

ct No. EP/SP/66/12 Facilities, Phase 1	電行保護署 Environmental Protection Department
Sep 58	Oct 59
Sep-22	22, PFab 1-Line 6 - Mechanical Installation 2 PFab 1-Line 6 - Mechanical Installation 20-Oct-22, P ab 1-Line 6 - Mechanical Installation - Boile 22-Oct-22
PFab 1-Line 6 - Piping Fabrication, PFab 27-Sep-22	I-Line 6 - Piping Fabrication, 21-Aug-22
	06-Oct-22, PFab 2-Line 1 - Terti
	teel Structure Erection, 07-Aug-22, 07-Aug- Primary & Secondary Steel Structure Erect 23-Oct-2
	(Including Silencer ID fan), PFab 2-Line 1 28-Sep-22, PFab 2-Line 1 - 2nd Floor (EL1 PFab 2-Line 1 - 3rd Floor (EL23 PFab 2-Line 1 - 4th Flo
24-Sep-22	03-Oct-22, PFab 2-Line 1 - E&I Supp 10-Oct-22, PFab 2-Line 1 -
10-Sep-22	24-Oct 24-Oct 20-Oct-22, P
10-Sep-22 10-Sep-22	24-Oct
21-Sep-2:	2; PFab 2-Line 2 - Tertiary Structure Fabrica
	econdary Steel Structure Erection, 15-Aug- ~ EL44.22m) Primary & Secondary Steel S
31-Aug-22, PFab 2-Line 2 - 2nd Floor (	L12.47m) (Including Silencer ID fan), PFat EL12.47~ EL23.47m) (Including Dosing sys ine 2 - 3rd Floor (EL23.47~ EL34.47m) (Inc

Original Duration           o ammo         50           ammo         180           ammo         150           ammo         150           ammo         150           ammo         180           ammo         180           ammo         180           ammo         180           ammo         180           ammo         180           ammo         45           ammo         450           ammo         450           ammo         450           ammo         450           ammo         136           ammo         136           adary Sti         209           ammo         209	50 45 45 150 99 99 115 45 45 45 45 45 45 45 45 45 45 45 45 45	0% 13-Sep-22 0% 30-Aug-22 19-Aug-22 0% 19-Aug-22 0% 02-Dec-22 0% 02-Dec-22 11-Dec-20 A 11-Dec-20 A 30% 11-Dec-20 A 26-Mar-22 A 85% 26-Mar-22 A	13-Sep-22           13-Sep-22           07-Jan-23           06-Nov-22           06-Nov-22           06-Nov-22           01-Dec-22           22-Sep-22           01-Dec-22           01-Dec-22           13-Oct-22           13-Oct-22           01-Dec-22           01-Dec-22           13-Oct-22           13-Oct-22           13-Oct-22           13-Oct-22           13-Oct-22           13-Oct-22           13-Oct-23           15-Jan-23           30-Jan-23           30-Jan-23 <td< th=""><th>28-Aug-22           04-Jul-22           04-Jul-22           04-Jul-22           04-Jul-22           04-Jul-22           04-Jul-22           02-Jul-22           02-Jul-22           02-Jul-22           02-Jul-22           03-Jul-22           04-Jul-22           02-Jul-22           03-Jul-22           23-Jul-22           25-Oct-22           25-Oct-22           30-Jul-22           13-Aug-22           30-Jul-22           30-Jul-22           30-Jul-22           30-Jul-22           30-Jul-22           30-Jul-22           30-Jul-22           30-Jul-23           30-Jul-24           <td< th=""><th></th><th>-7       -27       -27       -28       -38       -29       -29       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -39       -31   <th>Jul         Aug           56         57           11-Aug-22*         11-Aug-22*           09-Aug-22*         16-Aug-22           16-Aug-22         30-A           30-A         30-A           16-Aug-22         30-A           16-Aug-22         30-A           19-Aug-22         19-Aug-22</th></th></td<></th></td<>	28-Aug-22           04-Jul-22           04-Jul-22           04-Jul-22           04-Jul-22           04-Jul-22           04-Jul-22           02-Jul-22           02-Jul-22           02-Jul-22           02-Jul-22           03-Jul-22           04-Jul-22           02-Jul-22           03-Jul-22           23-Jul-22           25-Oct-22           25-Oct-22           30-Jul-22           13-Aug-22           30-Jul-22           30-Jul-22           30-Jul-22           30-Jul-22           30-Jul-22           30-Jul-22           30-Jul-22           30-Jul-23           30-Jul-24 <td< th=""><th></th><th>-7       -27       -27       -28       -38       -29       -29       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -39       -31   <th>Jul         Aug           56         57           11-Aug-22*         11-Aug-22*           09-Aug-22*         16-Aug-22           16-Aug-22         30-A           30-A         30-A           16-Aug-22         30-A           16-Aug-22         30-A           19-Aug-22         19-Aug-22</th></th></td<>		-7       -27       -27       -28       -38       -29       -29       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -38       -39       -31 <th>Jul         Aug           56         57           11-Aug-22*         11-Aug-22*           09-Aug-22*         16-Aug-22           16-Aug-22         30-A           30-A         30-A           16-Aug-22         30-A           16-Aug-22         30-A           19-Aug-22         19-Aug-22</th>	Jul         Aug           56         57           11-Aug-22*         11-Aug-22*           09-Aug-22*         16-Aug-22           16-Aug-22         30-A           30-A         30-A           16-Aug-22         30-A           16-Aug-22         30-A           19-Aug-22         19-Aug-22
180           180           150           150           150           150           180           180           180           180           180           180           180           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45	45 45 150 99 99 115 45 45 45 45 45 45 45 45 45 45 45 45 45	03-Jun-21 A           75%         03-Jun-21 A           11-Aug-22         11-Aug-22*           11-Aug-22*         14-Apr-22 A           45%         14-Apr-22 A           09*Aug-22         09*Aug-22*           09*Aug-22         16-Aug-22           0%         13-Sep-22           0%         30-Aug-22           0%         13-Sep-22           0%         13-Sep-22           0%         30-Aug-22           0%         13-Sep-22           0%         30-Aug-22           0%         19-Aug-22           0%         19-Dec-20 A           11-Dec-20 A         11-Dec-20 A           11-Dec-20 A         26-Mar-22 A           0%         26-Mar-22 A	13-Sep-22           13-Sep-22           07-Jan-23           06-Nov-22           06-Nov-22           01-Dec-22           22-Sep-22           01-Dec-22           01-Dec-22           13-Oct-22           13-Oct-22           01-Dec-22           13-Oct-22           13-Oct-22           13-Oct-22           13-Oct-22           13-Oct-22           13-Oct-23           15-Jan-23           30-Jan-23           30-Jan-23           30-Jan-23           30-Jan-23           03-Dec-22           03-Aug-23           03-Dec-22           03-Dec-22           03-Dec-22           03-Dec-22           03-Dec-22           03-Dec-22           03-Dec-22 <td< th=""><th>04-Jul-22           04-Jul-22           04-Jul-22           04-Jul-22           02-Jul-22           02-Jul-22           02-Jul-22           02-Jul-22           03-Jul-22           03-Jul-22           03-Jul-22           03-Jul-22           03-Jul-22           23-Jul-22           25-Oct-22           23-Jul-22           13-Aug-22           30-Jul-22</th><th>18-Aug-22           18-Aug-22           01-Dec-22           01-Dec-22           09-Oct-22           09-Oct-22           25-Oct-22           25-Oct-22           06-Sep-22           04-Sep-22           04-Sep-22           05-Sep-22           06-Sep-22           06-Sep-22           06-Sep-22           06-Sep-22           06-Sep-22           06-Sep-22           06-Sep-22           06-Sep-22           <td< th=""><th>-27 -27 -38 -38 -29 -29 -38 -38 -38 -38 -38 -38 -38 -38</th><th>09-Aug-22* 11-Aug-22* 09-Aug-22* 16-Aug-22 30-A 30-A 16-Aug-22 30-A 30-A 30-A 30-A 30-A</th></td<></th></td<>	04-Jul-22           04-Jul-22           04-Jul-22           04-Jul-22           02-Jul-22           02-Jul-22           02-Jul-22           02-Jul-22           03-Jul-22           03-Jul-22           03-Jul-22           03-Jul-22           03-Jul-22           23-Jul-22           25-Oct-22           23-Jul-22           13-Aug-22           30-Jul-22	18-Aug-22           18-Aug-22           01-Dec-22           01-Dec-22           09-Oct-22           09-Oct-22           25-Oct-22           25-Oct-22           06-Sep-22           04-Sep-22           04-Sep-22           05-Sep-22           06-Sep-22           06-Sep-22           06-Sep-22           06-Sep-22           06-Sep-22           06-Sep-22           06-Sep-22           06-Sep-22 <td< th=""><th>-27 -27 -38 -38 -29 -29 -38 -38 -38 -38 -38 -38 -38 -38</th><th>09-Aug-22* 11-Aug-22* 09-Aug-22* 16-Aug-22 30-A 30-A 16-Aug-22 30-A 30-A 30-A 30-A 30-A</th></td<>	-27 -27 -38 -38 -29 -29 -38 -38 -38 -38 -38 -38 -38 -38	09-Aug-22* 11-Aug-22* 09-Aug-22* 16-Aug-22 30-A 30-A 16-Aug-22 30-A 30-A 30-A 30-A 30-A
150           150           180           180           180           180           180           180           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           460 <tr< td=""><td>150 150 99 99 115 45 45 45 45 45 45 45 45 45 45 150 150 60 60 60 208 126 126 126 126 338 9 9 29 88</td><td>11-Aug-22           0%           11-Aug-22*           14-Apr-22 A           45%           14-Apr-22 A           09-Aug-22           0%           09-Aug-22*           0%           16-Aug-22           0%           16-Aug-22           0%           13-Sep-22           0%           0%-Aug-22           0%           30-Aug-22           0%           13-Sep-22           0%           30-Aug-22           0%           13-Sep-22           0%           30-Aug-22           0%           30-Aug-22           0%           30-Aug-22           0%           30-Aug-22           0%           30-Aug-22           0%           19-Aug-22           0%           02-Dec-22           0%           11-Dec-20 A           30%           11-Dec-20 A           30%           26-Mar-22 A           0%           09-Aug-22</td><td>07-Jan-23           07-Jan-23           06-Nov-22           06-Nov-22           01-Dec-22           22-Sep-22           01-Dec-22           01-Dec-22           01-Dec-22           01-Dec-22           13-Oct-22           13-Oct-22           13-Oct-22           13-Oct-22           13-Oct-22           13-Oct-22           13-Oct-23           15-Jan-23           30-Jan-23           30-Jan-23           30-Jan-23           03-Dec-22           <td< td=""><td>04-Jul-22           04-Jul-22           02-Jul-22           02-Jul-22           02-Jul-22           02-Jul-22           02-Jul-22           02-Jul-22           03-Jul-22           23-Jul-22           12-Jul-22           25-Oct-22           23-Jul-22           13-Aug-22           30-Jul-22           30-Jul-22</td><td>01-Dec-22 01-Dec-22 09-Oct-22 25-Oct-22 25-Oct-22 25-Oct-22 06-Sep-22 06-Sep-22 25-Oct-22 25-Oct-22 06-Sep-22 25-Oct-22 06-Sep-22 06-Sep-22 06-Sep-22 09-Dec-22 09-Dec-22 24-Dec-22 06-Feb-23 16-Dec-22</td><td>-38         -38         -29         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -</td><td>09-Aug-22* 11-Aug-22* 09-Aug-22* 16-Aug-22 30-A 30-A 16-Aug-22 30-A 30-A 30-A 30-A 30-A</td></td<></td></tr<>	150 150 99 99 115 45 45 45 45 45 45 45 45 45 45 150 150 60 60 60 208 126 126 126 126 338 9 9 29 88	11-Aug-22           0%           11-Aug-22*           14-Apr-22 A           45%           14-Apr-22 A           09-Aug-22           0%           09-Aug-22*           0%           16-Aug-22           0%           16-Aug-22           0%           13-Sep-22           0%           0%-Aug-22           0%           30-Aug-22           0%           13-Sep-22           0%           30-Aug-22           0%           13-Sep-22           0%           30-Aug-22           0%           30-Aug-22           0%           30-Aug-22           0%           30-Aug-22           0%           30-Aug-22           0%           19-Aug-22           0%           02-Dec-22           0%           11-Dec-20 A           30%           11-Dec-20 A           30%           26-Mar-22 A           0%           09-Aug-22	07-Jan-23           07-Jan-23           06-Nov-22           06-Nov-22           01-Dec-22           22-Sep-22           01-Dec-22           01-Dec-22           01-Dec-22           01-Dec-22           13-Oct-22           13-Oct-22           13-Oct-22           13-Oct-22           13-Oct-22           13-Oct-22           13-Oct-23           15-Jan-23           30-Jan-23           30-Jan-23           30-Jan-23           03-Dec-22           03-Dec-22 <td< td=""><td>04-Jul-22           04-Jul-22           02-Jul-22           02-Jul-22           02-Jul-22           02-Jul-22           02-Jul-22           02-Jul-22           03-Jul-22           23-Jul-22           12-Jul-22           25-Oct-22           23-Jul-22           13-Aug-22           30-Jul-22           30-Jul-22</td><td>01-Dec-22 01-Dec-22 09-Oct-22 25-Oct-22 25-Oct-22 25-Oct-22 06-Sep-22 06-Sep-22 25-Oct-22 25-Oct-22 06-Sep-22 25-Oct-22 06-Sep-22 06-Sep-22 06-Sep-22 09-Dec-22 09-Dec-22 24-Dec-22 06-Feb-23 16-Dec-22</td><td>-38         -38         -29         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -</td><td>09-Aug-22* 11-Aug-22* 09-Aug-22* 16-Aug-22 30-A 30-A 16-Aug-22 30-A 30-A 30-A 30-A 30-A</td></td<>	04-Jul-22           04-Jul-22           02-Jul-22           02-Jul-22           02-Jul-22           02-Jul-22           02-Jul-22           02-Jul-22           03-Jul-22           23-Jul-22           12-Jul-22           25-Oct-22           23-Jul-22           13-Aug-22           30-Jul-22           30-Jul-22	01-Dec-22 01-Dec-22 09-Oct-22 25-Oct-22 25-Oct-22 25-Oct-22 06-Sep-22 06-Sep-22 25-Oct-22 25-Oct-22 06-Sep-22 25-Oct-22 06-Sep-22 06-Sep-22 06-Sep-22 09-Dec-22 09-Dec-22 24-Dec-22 06-Feb-23 16-Dec-22	-38         -38         -29         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -38         -	09-Aug-22* 11-Aug-22* 09-Aug-22* 16-Aug-22 30-A 30-A 16-Aug-22 30-A 30-A 30-A 30-A 30-A
150           180           180           115           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45	150 99 99 115 45 45 45 45 45 45 45 45 45 45 150 150 60 60 60 208 126 126 126 126 338 9 9 29 88	0%         11-Aug-22*           14-Apr-22A           45%         14-Apr-22A           09-Aug-22           0%         09-Aug-22*           0%         16-Aug-22           0%         16-Aug-22           0%         30-Aug-22           0%         30-Aug-22           0%         30-Aug-22           0%         30-Aug-22           0%         13-Sep-22           0%         30-Aug-22           0%         13-Sep-22           0%         30-Aug-22           0%         02-Dec-22           0%         02-Dec-22           0%         11-Dec-20 A           30%         11-Dec-20 A           30%         11-Dec-20 A           30%         26-Mar-22 A           0%         09-Aug-22           0%         09-Aug-22 A	07-Jan-23         06-Nov-22         06-Nov-22         06-Nov-22         22-Sep-22         29-Sep-22         01-Dec-22         13-Oct-22         13-Oct-22         01-Dec-22         01-Dec-22         13-Oct-22         13-Oct-22         13-Oct-22         13-Oct-23         15-Jan-23         15-Jan-23         30-Jan-23         30-Jan-23         03-Dec-22	04-Jul-22           02-Jul-22           02-Jul-22           02-Jul-22           09-Jul-22           09-Jul-22           23-Jul-22           12-Jul-22           12-Jul-22           12-Jul-22           12-Jul-22           13-Aug-22	01-Dec-22 09-Oct-22 25-Oct-22 25-Oct-22 25-Oct-22 06-Sep-22 06-Sep-22 06-Sep-22 06-Sep-22 06-Sep-22 06-Sep-22 06-Sep-22 06-Sep-22 06-Sep-22 06-Sep-22 06-Sep-22 09-Dec-22 09-Dec-22 24-Dec-22 06-Feb-23 16-Dec-22	-38 -29 -29 -38 -38 -38 -38 -38 -38 -38 -38	09-Aug-22* 16-Aug-22 30-A 30-A 16-Aug-22 30-A 30-A 30-A 30-A 30-A
180           180           115           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45	99 99 115 45 45 108 80 45 45 94 80 45 45 45 150 150 60 60 60 208 126 126 126 38 9 9 9 29 88	14-Apr-22A           45%         14-Apr-22A           09-Aug-22         09%           09-Aug-22*         16-Aug-22           0%         13-Sep-22           0%         30-Aug-22           0%         30-Aug-22           0%         30-Aug-22           0%         30-Aug-22           0%         30-Aug-22           0%         13-Sep-22           0%         30-Aug-22           0%         02-Dec-22           0%         02-Dec-22           0%         11-Dec-20 A           11-Dec-20 A         11-Dec-20 A           30%         26-Mar-22 A           0%         09-Aug-22           0%         09-Aug-22	06-Nov-22           06-Nov-22           06-Nov-22           01-Dec-22           22-Sep-22           01-Dec-22           01-Dec-22           13-Oct-22           13-Oct-22           01-Dec-22           01-Dec-22           01-Dec-22           01-Dec-22           01-Dec-22           13-Oct-22           13-Oct-22           13-Oct-23           15-Jan-23           30-Jan-23           30-Jan-23           03-Dec-22           03-Dec-22 <td< td=""><td>02-Jul-22           02-Jul-22           02-Jul-22           02-Jul-22           09-Jul-22           23-Jul-22           06-Aug-22           23-Jul-22           12-Jul-22           25-Oct-22           30-Jul-22           13-Aug-22           13-Aug-22           30-Jul-22</td><td>09-Oct-22           09-Oct-22           09-Oct-22           25-Oct-22           25-Oct-22           25-Oct-22           06-Sep-22           06-Sep-22           06-Sep-22           06-Sep-22           06-Sep-22           06-Sep-22           06-Sep-22           09-Dec-22           09-Dec-22           24-Dec-22           24-Dec-22           26-Sep-23           16-Dec-24</td><td>-29 -29 -38 -38 -38 -38 -38 -38 -38 -38</td><td>09-Aug-22* 16-Aug-22 30-A 30-A 16-Aug-22 30-A 30-A 30-A 30-A 30-A</td></td<>	02-Jul-22           02-Jul-22           02-Jul-22           02-Jul-22           09-Jul-22           23-Jul-22           06-Aug-22           23-Jul-22           12-Jul-22           25-Oct-22           30-Jul-22           13-Aug-22           13-Aug-22           30-Jul-22	09-Oct-22           09-Oct-22           09-Oct-22           25-Oct-22           25-Oct-22           25-Oct-22           06-Sep-22           06-Sep-22           06-Sep-22           06-Sep-22           06-Sep-22           06-Sep-22           06-Sep-22           09-Dec-22           09-Dec-22           24-Dec-22           24-Dec-22           26-Sep-23           16-Dec-24	-29 -29 -38 -38 -38 -38 -38 -38 -38 -38	09-Aug-22* 16-Aug-22 30-A 30-A 16-Aug-22 30-A 30-A 30-A 30-A 30-A
180           115           45           45           108           80           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45	999 115 45 45 108 80 45 45 45 45 45 150 150 60 60 60 208 126 126 126 38 9 9 29 88	45%         14-Apr-22 A           09-Aug-22         0%           0%         09-Aug-22*           0%         16-Aug-22           0%         13-Sep-22           0%         30-Aug-22           0%         30-Aug-22           0%         30-Aug-22           0%         16-Aug-22           0%         30-Aug-22           0%         13-Sep-22           0%         13-Aug-22           0%         30-Aug-22           0%         19-Aug-22           0%         02-Dec-22           0%         02-Dec-22           0%         11-Dec-20 A           11-Dec-20 A         11-Dec-20 A           13-Dec-20 A         26-Mar-22 A           0%         26-Mar-22 A           0%         09-Aug-22           0%         09-Aug-22	06-Nov-22           01-Dec-22           22-Sep-22           29-Sep-22           01-Dec-22           01-Dec-22           13-Oct-22           29-Sep-22           01-Dec-22           01-Dec-22           01-Dec-22           01-Dec-22           01-Dec-22           13-Oct-22           13-Oct-22           13-Oct-23           15-Jan-23           30-Jan-23           30-Jan-23           03-Dec-22           03-Aug-23	02-Jul-22           02-Jul-22           02-Jul-22           09-Jul-22           23-Jul-22           12-Jul-22           25-Oct-22           30-Jul-22           13-Aug-22           13-Aug-22           30-Jul-22	09-Oct-22         25-Oct-22         16-Aug-22         23-Aug-22         25-Oct-22         06-Sep-22         06-Sep-22         25-Oct-22         25-Oct-22         25-Oct-22         06-Sep-22         25-Oct-22         06-Sep-22         06-Sep-22         09-Dec-22         09-Dec-22         24-Dec-22         24-Dec-22         24-Dec-22         26-Feb-23         16-Dec-22	-29 -38 -38 -38 -38 -38 -38 -38 -38	09-Aug-22* 16-Aug-22 30-A 30-A 16-Aug-22 30-A 30-A 30-A 30-A 30-A 30-A
45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           460           460           461           462           463           463           4643           4643 <t< td=""><td>45 45 108 80 45 45 45 94 80 45 150 150 150 60 60 60 208 126 126 126 126 38 9 9 229</td><td>0%         09-Aug-22*           0%         16-Aug-22           0%         13-Sep-22           0%         30-Aug-22           0%         19-Aug-22           0%         19-Aug-22           0%         02-Dec-22           0%         02-Dec-20 A           11-Dec-20 A         11-Dec-20 A           30%         11-Dec-20 A           10         11-Dec-20 A           26-Mar-22 A         85%           26-Mar-22 A         0%           0%         09-Aug-22           0%         09-Aug-22</td><td>22-Sep-22 29-Sep-22 01-Dec-22 13-Oct-22 29-Sep-22 01-Dec-22 01-Dec-22 01-Dec-22 13-Oct-22 13-Oct-22 13-Oct-22 13-Oct-23 15-Jan-23 30-Jan-23 30-Jan-23 23-Feb-23 03-Dec-22 03-Dec-22 08-Aug-22</td><td>02-Jul-22           09-Jul-22           23-Jul-22           25-Oct-22           30-Jul-22           13-Aug-22           13-Aug-22           30-Jul-22</td><td>16-Aug-22 23-Aug-22 25-Oct-22 06-Sep-22 06-Sep-22 25-Oct-22 25-Oct-22 25-Oct-22 06-Sep-22 06-Sep-22 09-Dec-22 09-Dec-22 24-Dec-22 24-Dec-22 06-Feb-23 16-Dec-22</td><td>-38 -38 -38 -38 -38 -38 -24 -38 -38 -38 -38 -38 -38 -38 -38</td><td>16-Aug-22 30-A 30-A 16-Aug-22 30-A 30-A 30-A</td></t<>	45 45 108 80 45 45 45 94 80 45 150 150 150 60 60 60 208 126 126 126 126 38 9 9 229	0%         09-Aug-22*           0%         16-Aug-22           0%         13-Sep-22           0%         30-Aug-22           0%         19-Aug-22           0%         19-Aug-22           0%         02-Dec-22           0%         02-Dec-20 A           11-Dec-20 A         11-Dec-20 A           30%         11-Dec-20 A           10         11-Dec-20 A           26-Mar-22 A         85%           26-Mar-22 A         0%           0%         09-Aug-22           0%         09-Aug-22	22-Sep-22 29-Sep-22 01-Dec-22 13-Oct-22 29-Sep-22 01-Dec-22 01-Dec-22 01-Dec-22 13-Oct-22 13-Oct-22 13-Oct-22 13-Oct-23 15-Jan-23 30-Jan-23 30-Jan-23 23-Feb-23 03-Dec-22 03-Dec-22 08-Aug-22	02-Jul-22           09-Jul-22           23-Jul-22           25-Oct-22           30-Jul-22           13-Aug-22           13-Aug-22           30-Jul-22	16-Aug-22 23-Aug-22 25-Oct-22 06-Sep-22 06-Sep-22 25-Oct-22 25-Oct-22 25-Oct-22 06-Sep-22 06-Sep-22 09-Dec-22 09-Dec-22 24-Dec-22 24-Dec-22 06-Feb-23 16-Dec-22	-38 -38 -38 -38 -38 -38 -24 -38 -38 -38 -38 -38 -38 -38 -38	16-Aug-22 30-A 30-A 16-Aug-22 30-A 30-A 30-A
445           108           80           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           460           480           180           180           180           180           180           180           180           180           180           180           180           180           180	45 108 80 45 45 45 45 45 45 150 60 60 60 208 126 126 126 126 38 9 9 229	0%         16-Aug-22           16-Aug-22         13-Sep-22           0%         13-Sep-22           0%         30-Aug-22           0%         16-Aug-22           0%         16-Aug-22           0%         13-Sep-22           0%         13-Sep-22           0%         13-Sep-22           0%         30-Aug-22           0%         19-Aug-22           0%         19-Aug-22           0%         02-Dec-22           0%         02-Dec-22           0%         11-Dec-20 A           11-Dec-20 A         26-Mar-22 A           85%         26-Mar-22 A           0%         09-Aug-22           0%         09-Aug-22	29-Sep-22 01-Dec-22 13-Oct-22 29-Sep-22 01-Dec-22 01-Dec-22 13-Oct-22 13-Oct-22 13-Oct-22 13-Oct-22 13-Oct-23 15-Jan-23 30-Jan-23 30-Jan-23 23-Feb-23 03-Dec-22 03-Dec-22 08-Aug-22	09-Jul-22           23-Jul-22           06-Aug-22           23-Jul-22           25-Oct-22           30-Jul-22           13-Aug-22           13-Aug-22           30-Jul-22	23-Aug-22 25-Oct-22 06-Sep-22 06-Sep-22 25-Oct-22 25-Oct-22 25-Oct-22 06-Sep-22 06-Sep-22 09-Dec-22 09-Dec-22 24-Dec-22 24-Dec-22 06-Feb-23 16-Dec-22	38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38	16-Aug-22 30-A 30-A 16-Aug-22 30-A 30-A 30-A
108           80           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           460           180           180           180           180           180           180           180           180           180           180           180	108 80 45 45 94 80 45 45 150 150 60 60 208 126 126 126 38 9 9 29 88	16-Aug-22           0%         13-Sep-22           0%         30-Aug-22           0%         30-Aug-22           0%         16-Aug-22           0%         13-Sep-22           0%         30-Aug-22           0%         19-Aug-22           0%         02-Dec-22           0%         02-Dec-22           0%         02-Dec-22           0%         02-Dec-20 A           11-Dec-20 A         11-Dec-20 A           30%         11-Dec-20 A           30%         11-Dec-20 A           85%         26-Mar-22 A           0%         09-Aug-22           0%         09-Aug-22	01-Dec-22 01-Dec-22 13-Oct-22 29-Sep-22 01-Dec-22 13-Oct-22 13-Oct-22 13-Oct-22 13-Oct-22 13-Oct-22 13-Oct-23 30-Jan-23 30-Jan-23 30-Jan-23 30-Jan-23 23-Feb-23 03-Dec-22 03-Dec-22 08-Aug-22	23-Jul-22 06-Aug-22 23-Jul-22 23-Jul-22 23-Jul-22 23-Jul-22 23-Jul-22 23-Jul-22 23-Jul-22 12-Jul-22 25-Oct-22 30-Jul-22 13-Aug-22 13-Aug-22 30-Jul-22	25-Oct-22 25-Oct-22 06-Sep-22 06-Sep-22 25-Oct-22 25-Oct-22 06-Sep-22 06-Sep-22 09-Dec-22 09-Dec-22 24-Dec-22 06-Feb-23 16-Dec-22	-38 -38 -38 -38 -24 -38 -38 -38 -38 -38 -38 -38 -38	30-A 30-A 16-Aug-22
80           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           46           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180	80 45 45 94 80 45 150 150 60 60 208 126 126 126 338 9 9 29 88	0%         13-Sep-22           0%         30-Aug-22           0%         30-Aug-22           0%         16-Aug-22           0%         13-Sep-22           0%         30-Aug-22           0%         30-Aug-22           0%         30-Aug-22           0%         30-Aug-22           0%         30-Aug-22           0%         30-Aug-22           0%         19-Aug-22           0%         02-Dec-22           0%         02-Dec-22           0%         02-Dec-22           0%         11-Dec-20 A           11-Dec-20 A         11-Dec-20 A           30%         11-Dec-20 A           85%         26-Mar-22 A           0%         09-Aug-22           0%         09-Aug-22	01-Dec-22 13-Oct-22 29-Sep-22 01-Dec-22 13-Oct-22 13-Oct-22 13-Oct-22 15-Jan-23 30-Jan-23 30-Jan-23 30-Jan-23 30-Jan-23 03-Dec-22 03-Dec-22 03-Dec-22 03-Dec-22 08-Aug-22	06-Aug-22           23-Jul-22           23-Jul-22           23-Jul-22           06-Aug-22           23-Jul-22           23-Jul-22           23-Jul-22           23-Jul-22           23-Jul-22           23-Jul-22           23-Jul-22           25-Oct-22           30-Jul-22           13-Aug-22           30-Jul-22           30-Jul-22	25-Oct-22 06-Sep-22 06-Sep-22 25-Oct-22 06-Sep-22 06-Sep-22 06-Sep-22 09-Dec-22 09-Dec-22 24-Dec-22 06-Feb-23 16-Dec-22	-38 -38 -38 -24 -38 -38 -38 -38 -38 -38 -38 -38 -38 -38	30-A 16-Aug-22 30-A 30-A 30-A
445           445           445           445           445           445           445           445           445           445           445           445           445           445           445           445           445           445           445           445           445           445           445           445           445           445           445           445           445           445           445           445           445           445           445           445           445           445           445           445           445           445           445           445           445           445           445           445           445           445           445	45 45 94 80 45 150 150 60 60 208 126 126 126 338 9 9 29 88	0%         30-Aug-22           0%         30-Aug-22           0%         16-Aug-22           0%         13-Sep-22           0%         30-Aug-22           0%         30-Aug-22           0%         30-Aug-22           0%         30-Aug-22           0%         30-Aug-22           0%         30-Aug-22           0%         19-Aug-22           0%         02-Dec-22           0%         02-Dec-22           0%         02-Dec-22           0%         11-Dec-20 A           11-Dec-20 A         26-Mar-22 A           85%         26-Mar-22 A           0%         09-Aug-22           0%         09-Aug-22 A	13-Oct-22         13-Oct-22         29-Sep-22         01-Dec-22         13-Oct-22         13-Oct-22         15-Jan-23         30-Jan-23         30-Jan-23         23-Feb-23         03-Dec-22         03-Dec-22         03-Dec-22         03-Dec-22         03-Dec-22         06-Sep-22         08-Aug-22	23-Jul-22 23-Jul-22 23-Jul-22 06-Aug-22 23-Jul-22 23-Jul-22 12-Jul-22 12-Jul-22 25-Oct-22 30-Jul-22 13-Aug-22 13-Aug-22 30-Jul-22	06-Sep-22 06-Sep-22 25-Oct-22 06-Sep-22 06-Sep-22 06-Sep-22 09-Dec-22 09-Dec-22 24-Dec-22 24-Dec-22 06-Feb-23 16-Dec-22	38 38 24 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38 38	30-A 16-Aug-22 30-A 30-A 30-A
45           94           80           45           150           150           60           60           80           180           180           136           138           145           145           150           60           60           60           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136	45 94 80 45 150 150 60 60 208 126 126 126 338 9 9 29 88	0%         16-Aug-22           30-Aug-22         0%           13-Sep-22         0%           0%         30-Aug-22           0%         30-Aug-22           0%         30-Aug-22           0%         30-Aug-22           0%         20-Dec-22           0%         02-Dec-22           0%         02-Dec-22           11-Dec-20 A         11-Dec-20 A           30%         11-Dec-20 A           85%         26-Mar-22 A           0%         09-Aug-22           0%         09-Aug-22 A	29-Sep-22 01-Dec-22 13-Oct-22 13-Oct-22 15-Jan-23 15-Jan-23 30-Jan-23 23-Feb-23 03-Dec-22 03-Dec-22 06-Sep-22 08-Aug-22	23-Jul-22 23-Jul-22 23-Jul-22 23-Jul-22 12-Jul-22 25-Oct-22 25-Oct-22 30-Jul-22 13-Aug-22 13-Aug-22	06-Sep-22           25-Oct-22           25-Oct-22           06-Sep-22           09-Dec-22           09-Dec-22           24-Dec-22           24-Dec-22           26-Feb-23           16-Dec-22	-24 -38 -38 -38 -38 -38 -38 -38 -38 -38 -38	30-A 16-Aug-22 30-A 30-A 30-A
94           80           45           45           150           150           60           60           60           80           180           136           136           136           138           138           138           138           138           138           138           138           138           138           138           138           138           138           138           138           138           138           138           138           138           138           138           138           138           138           138           138           138           138           138           138           138           138           138           138           138	94 80 45 150 150 60 60 208 126 126 126 338 9 9 29 88	30-Aug-22           0%         13-Sep-22           0%         30-Aug-22           0%         30-Aug-22           0%         30-Aug-22           0%         19-Aug-22           0%         02-Dec-22           0%         02-Dec-22           11-Dec-20 A           30%         11-Dec-20 A           26-Mar-22 A           85%         26-Mar-22 A           0%         09-Aug-22	01-Dec-22 01-Dec-22 13-Oct-22 13-Oct-22 15-Jan-23 15-Jan-23 30-Jan-23 30-Jan-23 23-Feb-23 03-Dec-22 03-Dec-22 06-Sep-22 08-Aug-22	23-Jul-22 06-Aug-22 23-Jul-22 23-Jul-22 12-Jul-22 25-Oct-22 25-Oct-22 30-Jul-22 13-Aug-22 30-Jul-22	25-Oct-22 25-Oct-22 06-Sep-22 09-Dec-22 09-Dec-22 24-Dec-22 24-Dec-22 06-Feb-23 16-Dec-22	-38 -38 -38 -38 -38 -38 -38 -38 -38 -38	30-A 30-A
80           45           45           150           60           60           80           180           180           136           145           180           180           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           137           138           139           139           139           139	80 45 150 150 60 60 208 126 126 126 338 9 9 29 88	0%         13-Sep-22           0%         30-Aug-22           0%         30-Aug-22           19-Aug-22         19-Aug-22           0%         02-Dec-22           0%         02-Dec-22           11-Dec-20 A         11-Dec-20 A           30%         11-Dec-20 A           26-Mar-22 A         26-Mar-22 A           0%         09-Aug-22	01-Dec-22 13-Oct-22 13-Oct-22 15-Jan-23 15-Jan-23 30-Jan-23 30-Jan-23 23-Feb-23 03-Dec-22 03-Dec-22 06-Sep-22 08-Aug-22	06-Aug-22           23-Jul-22           23-Jul-22           12-Jul-22           25-Oct-22           25-Oct-22           30-Jul-22           13-Aug-22           13-Aug-22           30-Jul-22	25-Oct-22 06-Sep-22 09-Dec-22 09-Dec-22 24-Dec-22 24-Dec-22 06-Feb-23 16-Dec-22	-38 -38 -38 -38 -38 -38 -38 -38 -38 -17	30.4
445           45           150           150           60           60           584           180           136           140           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           137           138           139           136           137           138           139           139           139           139           139           139           139           139           139           139           139           139           139           139           139 <t< td=""><td>45 45 150 60 60 208 126 126 38 9 9 29 88</td><td>0%         30-Aug-22           0%         30-Aug-22           19-Aug-22         19-Aug-22           0%         19-Aug-22           0%         02-Dec-22           11-Dec-20 A         11-Dec-20 A           30%         11-Dec-20 A           26-Mar-22 A         26-Mar-22 A           0%         09-Aug-22</td><td>13-Oct-22           13-Oct-22           15-Jan-23           30-Jan-23           30-Jan-23           03-Dac-22           03-Dec-22           06-Sep-22           08-Aug-22</td><td>23-Jul-22 23-Jul-22 12-Jul-22 25-Oct-22 25-Oct-22 30-Jul-22 13-Aug-22 30-Jul-22</td><td>06-Sep-22         06-Sep-22         09-Dec-22         24-Dec-22         24-Dec-22         06-Feb-23         16-Dec-22</td><td>-38 -38 -38 -38 -38 -38 -38 -17 13</td><td>30.4</td></t<>	45 45 150 60 60 208 126 126 38 9 9 29 88	0%         30-Aug-22           0%         30-Aug-22           19-Aug-22         19-Aug-22           0%         19-Aug-22           0%         02-Dec-22           11-Dec-20 A         11-Dec-20 A           30%         11-Dec-20 A           26-Mar-22 A         26-Mar-22 A           0%         09-Aug-22	13-Oct-22           13-Oct-22           15-Jan-23           30-Jan-23           30-Jan-23           03-Dac-22           03-Dec-22           06-Sep-22           08-Aug-22	23-Jul-22 23-Jul-22 12-Jul-22 25-Oct-22 25-Oct-22 30-Jul-22 13-Aug-22 30-Jul-22	06-Sep-22         06-Sep-22         09-Dec-22         24-Dec-22         24-Dec-22         06-Feb-23         16-Dec-22	-38 -38 -38 -38 -38 -38 -38 -17 13	30.4
445           150           150           60           584           180           136           136           137           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           136           137           138           139           139           139           139           139           139           139           139           139           139           139           139           139           139           139           139           139           139           139           139           139	45 150 60 60 208 126 126 38 9 29 88	0%         30-Aug-22           19-Aug-22         19-Aug-22           0%         19-Aug-22           0%         02-Dec-22           0%         02-Dec-22           11-Dec-20 A         11-Dec-20 A           30%         11-Dec-20 A           26-Mar-22 A         85%           0%         09-Aug-22           0%         09-Aug-22 A	13-Oct-22           15-Jan-23           15-Jan-23           30-Jan-23           23-Feb-23           03-Dec-22           03-Dec-22           06-Sep-22           08-Aug-22	23-Jul-22 12-Jul-22 25-Oct-22 25-Oct-22 30-Jul-22 13-Aug-22 30-Jul-22	06-Sep-22         09-Dec-22         09-Dec-22         24-Dec-22         24-Dec-22         06-Feb-23         16-Dec-22	-38 -38 -38 -38 -38 -38 -17 13	30.4
150           150           60           60           584           180           136           dary St           60           136           dary St           60           136           136           136           137           138           138           139           136           136           136           136           136           136           138           138           139           139           130           131           132           132           133           134           135           135           136           137           138           139           139           139           139           139           139           139           139           139           139           139	150 150 60 208 126 126 38 9 29 88	19-Aug-22           0%         19-Aug-22           02-Dec-22         02-Dec-22           0%         02-Dec-20           11-Dec-20 A         11-Dec-20 A           30%         11-Dec-20 A           26-Mar-22 A         26-Mar-22 A           0%         09-Aug-22           09-Aug-22 A         02-Jan-22 A	15-Jan-23           15-Jan-23           30-Jan-23           30-Jan-23           23-Feb-23           03-Dec-22           03-Dec-22           06-Sep-22           08-Aug-22	12-Jul-22           12-Jul-22           25-Oct-22           30-Jul-22           13-Aug-22           13-Aug-22           30-Jul-22	09-Dec-22         09-Dec-22         24-Dec-22         24-Dec-22         06-Feb-23         16-Dec-22	-38 -38 -38 -38 -38 -17 13	
60           60           584           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180           180 <t< td=""><td>60 60 208 126 126 38 9 29 88</td><td>0%         19-Aug-22           02-Dec-22         02-Dec-22           11-Dec-20 A         11-Dec-20 A           30%         11-Dec-20 A           26-Mar-22 A         26-Mar-22 A           0%         09-Aug-22           0%         02-Jan-22 A</td><td>15-Jan-23 30-Jan-23 30-Jan-23 23-Feb-23 03-Dec-22 03-Dec-22 06-Sep-22 08-Aug-22</td><td>25-Oct-22 25-Oct-22 30-Jul-22 13-Aug-22 13-Aug-22 30-Jul-22</td><td>24-Dec-22 24-Dec-22 06-Feb-23 16-Dec-22</td><td>-38 -38 -17 13</td><td>19-Aug-22</td></t<>	60 60 208 126 126 38 9 29 88	0%         19-Aug-22           02-Dec-22         02-Dec-22           11-Dec-20 A         11-Dec-20 A           30%         11-Dec-20 A           26-Mar-22 A         26-Mar-22 A           0%         09-Aug-22           0%         02-Jan-22 A	15-Jan-23 30-Jan-23 30-Jan-23 23-Feb-23 03-Dec-22 03-Dec-22 06-Sep-22 08-Aug-22	25-Oct-22 25-Oct-22 30-Jul-22 13-Aug-22 13-Aug-22 30-Jul-22	24-Dec-22 24-Dec-22 06-Feb-23 16-Dec-22	-38 -38 -17 13	19-Aug-22
60           584           180           180           136           idary St           00           136           137           138           138           138           138           138           138           138           138           138           138           138           138           138           138           138           138           138           139           139           139           139           139           139           130           130           131           131           132           133           133           133           134           135           135           136           137           138           139           130           130           1310           1310	60 208 126 126 38 9 29 88	0%         02-Dec-22           11-Dec-20 A           11-Dec-20 A           30%         11-Dec-20 A           26-Mar-22 A           85%         26-Mar-22 A           0%         09-Aug-22           02-Jan-22 A	30-Jan-23 23-Feb-23 03-Dec-22 03-Dec-22 06-Sep-22 08-Aug-22	25-Oct-22 30-Jul-22 13-Aug-22 13-Aug-22 30-Jul-22	24-Dec-22 06-Feb-23 16-Dec-22	-38 -17 13	
584           180           180           136           idary St∈           60           ndary St⊧           29           269           D fan)           60           nd resid           29	208 126 126 38 9 29 88	11-Dec-20 A           11-Dec-20 A           30%           11-Dec-20 A           26-Mar-22 A           85%           26-Mar-22 A           0%           09-Aug-22 A           02-Jan-22 A	23-Feb-23 03-Dec-22 03-Dec-22 06-Sep-22 08-Aug-22	30-Jul-22           13-Aug-22           13-Aug-22           30-Jul-22	06-Feb-23 16-Dec-22	-17 13	
180           180           136           idary St∈           60           ndary St⊧           29           269           D fan)           60           nd resid           29           269           0 ammo	126 126 38 9 29 88	11-Dec-20 A           30%         11-Dec-20 A           26-Mar-22 A         26-Mar-22 A           0%         09-Aug-22 A           02-Jan-22 A         02-Jan-22 A	03-Dec-22 03-Dec-22 06-Sep-22 08-Aug-22	13-Aug-22 13-Aug-22 30-Jul-22	16-Dec-22	13	
180           136           Idary Ste           00           ndary Ste           29           269           D fan)           60           nd syster           60           nd resid           29	126 38 9 29 88	30%         11-Dec-20 A           26-Mar-22 A         26-Mar-22 A           0%         09-Aug-22           02-Jan-22 A         02-Jan-22 A	03-Dec-22 06-Sep-22 08-Aug-22	13-Aug-22 30-Jul-22			
136           idary Ste         60           ndary Ste         29           D fan)         60           ig syster         60           nd resid         29           o ammo         50	38 9 29 88	26-Mar-22 A 85% 26-Mar-22 A 0% 09-Aug-22 02-Jan-22 A	06-Sep-22 08-Aug-22	30-Jul-22			
dary Ste         60           ndary Ste         29           D fan)         60           ng syster         60           nd resid         29           o ammo         50	9 29 88	85% 26-Mar-22 A 0% 09-Aug-22 02-Jan-22 A	08-Aug-22		19-Sep-22	13	
269D fan)60ng syster60nd resid29o ammo50	88	02-Jan-22 A	06-Sep-22	30-Jul-22	07-Aug-22	-1	PFab 2-Line 3 - 3rd
D fan) 60 Ig syster 60 Ind resi d 29 o ammo 50				22-Aug-22	19-Sep-22	13	09-Aug-22
ng syster 60 nd resid 29 o ammo 50	27			20-Sep-22	08-Nov-22	13	
nd residi 29 o ammo 50	00	55% 02-Jan-22 A	-	13-Oct-22	08-Nov-22	74	
o ammo 50	38 29	36.67% 10-Mar-22 A 0% 09-Aug-22	06-Sep-22 06-Sep-22	02-Oct-22 11-Oct-22	08-Nov-22 08-Nov-22	63 63	09-Aug-22
	29 50	0% 09-Aug-22 0% 07-Sep-22	26-Oct-22	20-Sep-22		13	03-Aug-22
180	87	03-Jun-21 A		11-Aug-22	05-Nov-22	11	
180	87	51.67% 03-Jun-21 A		11-Aug-22		11	
150	150	28-Aug-22	24-Jan-23	11-Aug-22	07-Jan-23	-17	
150	150	0% 28-Aug-22*	24-Jan-23	11-Aug-22	07-Jan-23	-17	28-Aug-
180	93			-		31	
		· ·					
45	45			-		-17	
110	110			-		-17	
80	80	0% 22-Oct-22	09-Jan-23	05-Oct-22	23-Dec-22	-17	
45	45	0% 08-Oct-22	21-Nov-22	· ·		-17	
				· · ·			
45	45	0% 08-Oct-22	21-Nov-22			-17	
150	150	27-Sep-22	23-Feb-23	10-Sep-22	06-Feb-23	-17	
150	150	0% 27-Sep-22	23-Feb-23	10-Sep-22	06-Feb-23	-17	
592	196					-3	
idary Ste 60						49	04-Aug-22, PFab 2-Line
ndary Sti 60	22	63.33% 12-Mar-22 A	21-Aug-22	31-Aug-22	21-Sep-22	31	2
253	72			19-Sep-22		31	
			-				20
			-				
			· · · · · · · · · · · · · · · · · · ·				
				· · ·			
180	102			13-Aug-22		13	
150	150					-3	
150	150					-3	16-Aug-22*
nc ID	180           115           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45           45	180         93           115         115           45         45           45         45           45         45           45         45           45         45           45         45           45         45           45         45           45         45           45         45           45         45           45         45           45         45           45         45           45         45           45         45           45         45           45         45           45         45           45         45           45         45           45         45           45         45           45         45           45         45           45         45           45         45           45         45           45         45           45         45           45         45           45         45           50	180         93         48.33%         14-Apr-22 A           115         115         17-Sep-22           45         45         0%         17-Sep-22           45         45         0%         17-Sep-22           45         45         0%         17-Sep-22           45         45         0%         24-Sep-22           45         45         0%         24-Sep-22           45         45         0%         80-Ct-22           45         45         0%         08-Ct-22           45         45         0%         08-Ct-22           45         45         0%         08-Ct-22           94         94         08-Oct-22           80         80         0%         22-Sep-22           45         45         0%         08-Ct-22           80         80         0%         27-Sep-22           45         150         0%         27-Sep-22           150         150         0%         27-Sep-22           45         0%         04-Ct-22         0           450         160         24         25-Ct-21 A           180         102 <t< td=""><td>180         93         48.33%         14-Apr-22A         31-Oct-22           115         115         17-Sep-22         09-Jan-23           455         455         0%         17-Sep-22         31-Oct-22           455         455         0%         24-Sep-22         09-Jan-23           455         455         0%         24-Sep-22         09-Jan-23           455         455         0%         22-Oct-22         09-Jan-23           455         455         0%         08-Oct-22         21-Nov-22           455         455         0%         08-Oct-22         09-Jan-23           455         455         0%         08-Oct-22         21-Nov-22           455         455         0%         08-Oct-22         09-Jan-23           455         455         0%         08-Oct-22         09-Jan-23           455         455         0%         08-Oct-22         21-Nov-22           455         455         0%         08-Oct-22         21-Nov-22           455         455         0%         08-Oct-22         21-Nov-22           455         150         0%         27-Sep-22         23-Feb-23           150</td><td>180         93         48.33%         14-Apr-22A         31-Oct-22         31-Aug-22           115         115         17-Sep-22         09-Jan-23         31-Aug-22           45         45         0%         17-Sep-22*         31-Oct-22         31-Aug-22           45         45         0%         17-Sep-22*         31-Oct-22         31-Aug-22           45         45         0%         24-Sep-22         07-Nov-22         07-Sep-22           110         110         22-Sep-22         09-Jan-23         21-Sep-22           45         45         0%         08-Oct-22         21-Nov-22         21-Sep-22           45         45         0%         08-Oct-22         21-Nov-22         21-Sep-22           45         45         0%         08-Oct-22         09-Jan-23         21-Sep-22           45         0%         08-Oct-22         09-Jan-23         05-Oct-22</td><td>180       93       48.33%       14-Apr-22A       31-Oct-22       31-Aug-22       01-Dec-22         115       115       17-Sep-22       09-Jan-23       31-Aug-22       23-Dec-22         45       45       0%       17-Sep-22*       31-Oct-22       31-Aug-22       14-Oct-22         45       45       0%       24-Sep-22       07-Nov-22       07-Sep-22       21-Oct-22         110       110       22-Sep-22       09-Jan-23       21-Sep-22       23-Dec-22         80       80       0%       22-Oct-22       09-Jan-23       05-Oct-22       23-Dec-22         45       45       0%       08-Oct-22       21-Nov-22       21-Sep-22       04-Nov-22         45       45       0%       08-Oct-22       09-Jan-23       21-Sep-22       04-Nov-22         45       45       0%       08-Oct-22       09-Jan-23       21-Sep-22       04-Nov-22         45       45       0%       08-Oct-22       09-Jan-23       05-Oct-22       23-Dec-22         45       45       0%       08-Oct-22       19-Nov-22       21-Sep-22       04-Nov-22         45       45       0%       08-Oct-22       21-Nov-22       21-Sep-22       04-Nov-2</td><td>180       93       48.33%       14-Apr-22A       31-Oct-22       31-Aug-22       01-Dec-22       31         115       115       17-Sep-22       09-Jan-23       31-Aug-22       23-Dec-22       -17         445       445       0%       17-Sep-22       07-Nov-22       17-Sep-22       21-Oct-22       -17         445       445       0%       24-Sep-22       09-Jan-23       21-Sep-22       32-Dec-22       -17         110       110       22-Sep-22       09-Jan-23       05-Oct-22       23-Dec-22       -17         45       445       0%       08-Oct-22       21-Nov-22       21-Sep-22       04-Nov-22       -17         45       445       0%       08-Oct-22       21-Nov-22       21-Sep-22       04-Nov-22       -17         45       45       0%       08-Oct-22       09-Jan-23       05-Oct-22       23-Dec-22       -17         45       45       0%       08-Oct-22       21-Nov-22       21-Sep-22       04-Nov-22       -17         46       45       0%       08-Oct-22       21-Nov-22       21-Sep-22       04-Nov-22       -17         45       45       0%       08-Oct-22       21-Nov-22       11-Sep-23</td></t<>	180         93         48.33%         14-Apr-22A         31-Oct-22           115         115         17-Sep-22         09-Jan-23           455         455         0%         17-Sep-22         31-Oct-22           455         455         0%         24-Sep-22         09-Jan-23           455         455         0%         24-Sep-22         09-Jan-23           455         455         0%         22-Oct-22         09-Jan-23           455         455         0%         08-Oct-22         21-Nov-22           455         455         0%         08-Oct-22         09-Jan-23           455         455         0%         08-Oct-22         21-Nov-22           455         455         0%         08-Oct-22         09-Jan-23           455         455         0%         08-Oct-22         09-Jan-23           455         455         0%         08-Oct-22         21-Nov-22           455         455         0%         08-Oct-22         21-Nov-22           455         455         0%         08-Oct-22         21-Nov-22           455         150         0%         27-Sep-22         23-Feb-23           150	180         93         48.33%         14-Apr-22A         31-Oct-22         31-Aug-22           115         115         17-Sep-22         09-Jan-23         31-Aug-22           45         45         0%         17-Sep-22*         31-Oct-22         31-Aug-22           45         45         0%         17-Sep-22*         31-Oct-22         31-Aug-22           45         45         0%         24-Sep-22         07-Nov-22         07-Sep-22           110         110         22-Sep-22         09-Jan-23         21-Sep-22           45         45         0%         08-Oct-22         21-Nov-22         21-Sep-22           45         45         0%         08-Oct-22         21-Nov-22         21-Sep-22           45         45         0%         08-Oct-22         09-Jan-23         21-Sep-22           45         0%         08-Oct-22         09-Jan-23         05-Oct-22	180       93       48.33%       14-Apr-22A       31-Oct-22       31-Aug-22       01-Dec-22         115       115       17-Sep-22       09-Jan-23       31-Aug-22       23-Dec-22         45       45       0%       17-Sep-22*       31-Oct-22       31-Aug-22       14-Oct-22         45       45       0%       24-Sep-22       07-Nov-22       07-Sep-22       21-Oct-22         110       110       22-Sep-22       09-Jan-23       21-Sep-22       23-Dec-22         80       80       0%       22-Oct-22       09-Jan-23       05-Oct-22       23-Dec-22         45       45       0%       08-Oct-22       21-Nov-22       21-Sep-22       04-Nov-22         45       45       0%       08-Oct-22       09-Jan-23       21-Sep-22       04-Nov-22         45       45       0%       08-Oct-22       09-Jan-23       21-Sep-22       04-Nov-22         45       45       0%       08-Oct-22       09-Jan-23       05-Oct-22       23-Dec-22         45       45       0%       08-Oct-22       19-Nov-22       21-Sep-22       04-Nov-22         45       45       0%       08-Oct-22       21-Nov-22       21-Sep-22       04-Nov-2	180       93       48.33%       14-Apr-22A       31-Oct-22       31-Aug-22       01-Dec-22       31         115       115       17-Sep-22       09-Jan-23       31-Aug-22       23-Dec-22       -17         445       445       0%       17-Sep-22       07-Nov-22       17-Sep-22       21-Oct-22       -17         445       445       0%       24-Sep-22       09-Jan-23       21-Sep-22       32-Dec-22       -17         110       110       22-Sep-22       09-Jan-23       05-Oct-22       23-Dec-22       -17         45       445       0%       08-Oct-22       21-Nov-22       21-Sep-22       04-Nov-22       -17         45       445       0%       08-Oct-22       21-Nov-22       21-Sep-22       04-Nov-22       -17         45       45       0%       08-Oct-22       09-Jan-23       05-Oct-22       23-Dec-22       -17         45       45       0%       08-Oct-22       21-Nov-22       21-Sep-22       04-Nov-22       -17         46       45       0%       08-Oct-22       21-Nov-22       21-Sep-22       04-Nov-22       -17         45       45       0%       08-Oct-22       21-Nov-22       11-Sep-23

ct No. EP/SP/66/12 Facilities, Phase 1	最現保護署 Environmental Protaction Department
	Oct 59
	PFab 2-
PFab 2-Line 2 - Pip	ing Fabrication, 13-Sep-22, 13-Sep-22, PFat
	-22, PFab 2-Line 2 - E&I Support Installation 29-Sep-22, PFab 2-Line 2 - E&I Cable Lac
13-Sep-22	13-Oct-22, PFab 2-Lin 13-Oct-22, PFab 2-Lin 29-Sep-22, PFab 2-Line 2 - MCC room ins
13-Sep-22	13-Oct-22, PFab 2-Lin 13-Oct-22, PFab 2-Lin
	/ Steel Structure Erection, 08-Aug-22, 08-Aug th Floor (EL34.47~ EL44.22m) Primary & Se
06-Sep-22, PFab 2-Line 3 - 2	EL12.47m) (Including Silencer ID fan), PFat nd Floor (EL12.47~ EL23.47m) (Including Do
06-Sep-22, PFab 2-Line 3 - 3 Sep-22	rd Floor (EL23.47~ EL34.47m) (Including As
	25-00
17-Sep-22*	
24-Sep-22	22-Oct-22
	08-Oct-22 08-Oct-22
22-Sep-22	
	22-Oct-22 08-Oct-22 08-Oct-22
27-Sep-22	
· · · · · · · · · · · · · · · · · · ·	
	ondary Steel Structure Erection, PFab 2-Line 44;22m) Primary & Secondary Steel Structur
, PFab 2-Line 4 - 2nd Floor (EL12.47~ E	/m) (Including Silencer ID fan), PFab 2-Line L23.47m) (Including Dosing system bicar), F
21-Sep-	22 PFab 2-Line 4 - 3rd Floor (EL23.47~ EL3 10-Oct-22, PFab 2-Line 4 -

57	56							Complete	Duration	Duration	Activity Name	
	30		33		02-Sep-22		14-Apr-22 A		142	180		E&I Fabrication
			33		02-Sep-22	19-Dec-22	14-Apr-22 A		142	180	PFab 2-Line 4 - E&I Fabrication	06-FGC-4-1220
0			-3 -3	16-Oct-22	02-Sep-22 02-Sep-22	28-Dec-22 19-Oct-22	05-Sep-22 05-Sep-22*		115 45	115 45	PFab 2-Line 4 - E&I Support Installation	E&I Installation 06-FGC-4-1230
			-3		09-Sep-22	26-Oct-22	12-Sep-22		45	45	PFab 2-Line 4 - E&I Cable Ladder Erection	6-FGC-4-1240
			-3	25-Dec-22		28-Dec-22	13-Sep-22		107	107		Electrical
			-3	25-Dec-22		28-Dec-22	10-Oct-22		80	80	ç	06-FGC-4-1250
			-3 -3	06-Nov-22 06-Nov-22	23-Sep-22 23-Sep-22	09-Nov-22	26-Sep-22		45 45	45 45		06-FGC-4-1260
			-3	06-Nov-22		09-Nov-22 27-Oct-22	26-Sep-22 13-Sep-22*		45	45	č	06-FGC-4-1270 06-FGC-4-1310
			-3		23-Sep-22	28-Dec-22	26-Sep-22		94	94		Instrument
			-3	25-Dec-22	07-Oct-22	28-Dec-22	10-Oct-22	0%	80	80	PFab 2-Line 4 - Instrument Cable Pulling and Termination	06-FGC-4-1280
			-3	06-Nov-22		09-Nov-22	26-Sep-22		45	45		06-FGC-4-1290
			-3	06-Nov-22		09-Nov-22	26-Sep-22	0%	45	45	PFab 2-Line 4 - Instrument Tubing Installation	06-FGC-4-1300
			-3 -3	08-Feb-23	12-Sep-22 12-Sep-22	11-Feb-23	15-Sep-22 15-Sep-22	0%	150 150	150 150	PFab 2-Line 4 - Insulation	<b>Insulation</b> 06-FGC-4-1010
			-7	25-Mar-23			18-Jun-21 A		245	641		PFab 2 - Line 5
			30	31-Oct-22			08-Jan-22 A		63	185	n	Structure Erection
09-Aug-22, PFab 2-Lir			56	04-Oct-22	· ·	09-Aug-22	08-Jan-22 A	83.33%	10	60	PFab 2-Line 5 - 2nd Floor(EL12.47~ EL23.47m) Primary & Secondary St	06-FGC-5-1060
4			-1	01-Sep-22		•	20-Apr-22 A		34	60	PFab 2-Line 5 - 3rd Floor(EL23.47~ EL34.47m) Primary & Secondary Ste	06-FGC-5-1070
۱ 			30	31-Oct-22	0		20-May-22		63	60	PFab 2-Line 5 - 4th Floor (EL34.47~ EL44.22m) Primary & Secondary Stu	06-FGC-5-1080
16-Aug-22, F			-1 37	31-Oct-22 22-Sep-22		01-Nov-22 16-Aug-22	21-Jan-22 A 21-Jan-22 A		94 17	245 60	PFab 2-Line 5 - 1st Floor (Below EL12.47m) (Including Silencer ID fan)	Mechanical Erection 06-FGC-5-1000
			37	04-Oct-22	· ·	28-Aug-22	24-Jun-22 A		29	60	PFab 2-Line 5 - 2nd Floor (EL12.47~ EL23.47m) (Including Dosing syster	06-FGC-5-1010
03-			-1	31-Oct-22	· ·	01-Nov-22	03-Sep-22		60	60	PFab 2-Line 5 - 3rd Floor (EL23.47~ EL34.47m) (Including As h and resid	06-FGC-5-1020
			53	11-Jan-23	22-Sep-22	19-Nov-22	18-Jun-21 A		112	180	n	Piping Fabrication
A			53	11-Jan-23		19-Nov-22	18-Jun-21 A		112	180	PFab 2-Line 5 - Piping Fabrication	06-FGC-5-1170
			-12		22-Sep-22	02-Mar-23	04-Oct-22		150	150		Piping Installation
			-12 73	18-Feb-23 25-Mar-23		02-Mar-23	04-Oct-22* 14-Apr-22 A		150 165	150 180	PFab 2-Line 5 - Piping Installation	06-FGC-5-1190     E&I Fabrication
			73	25-Mar-23		11-Jan-23 11-Jan-23	14-Apr-22 A		165	180	PFab 2-Line 5 - E&I Fabrication	06-FGC-5-1180
			-12	02-Dec-22	12-Oct-22	14-Dec-22	24-Oct-22		52	52		E&I Installation
			-12	25-Nov-22	12-Oct-22	07-Dec-22	24-Oct-22*	0%	45	45	PFab 2-Line 5 - E&I Support Installation	06-FGC-5-1230
			-12	02-Dec-22	19-Oct-22	14-Dec-22	31-Oct-22	0%	45	45	PFab 2-Line 5 - E&I Cable Ladder Erection	06-FGC-5-1240
			-12 -12	20-Mar-23 20-Mar-23	22-Oct-22 22-Oct-22	01-Apr-23 01-Apr-23	03-Nov-22 03-Nov-22	0%	150 150	150 150	PFab 2-Line 5 - Insulation	<b>1 Insulation</b> 06-FGC-5-1200
			-12	20-Mar-23	19-Jul-22		05-Jan-21 A		252	641	FFab 2-Line 5 - Insulation	PFab 2 - Line 6
			43	13-Nov-22	19-Jul-22	01-Oct-22	04-Jan-22 A		63	179	n	Structure Erection
14-Aug-22, PFa			43	26-Sep-22	12-Sep-22		04-Jan-22 A		15	60	PFab 2-Line 6 - 2nd Floor(EL12.47~ EL23.47m) Primary & Secondary St	06-FGC-6-1120
		<u></u>	-12	31-Aug-22	19-Jul-22	12-Sep-22	20-Apr-22 A		44	60	PFab 2-Line 6 - 3rd Floor(EL23.47~ EL34.47m) Primary & Secondary Ste	06-FGC-6-1130
			43 58	13-Nov-22 26-Jan-23		01-Oct-22	20-May-22 05-Jan-21 A		63 122	60 270	PFab 2-Line 6 - 4th Floor (EL34.47~ EL44.22m) Primary & Secondary Str	Mechanical Fabrication
			58		27-Sep-22 27-Sep-22		05-Jan-21 A		122	270	PFab 2-Line 6 - Mechanical Fabrication (By yard)	06-FGC-6-1210
			22	03-Dec-22			21-Jan-22 A		104	248		Mechanical Erection
03-Aug-22, PFab 2-Line 6 - 1st			75	17-Oct-22	14-Oct-22	03-Aug-22	21-Jan-22 A	93.33%	4	60	PFab 2-Line 6 - 1st Floor (Below EL12.47m) (Including Silencer ID fan)	06-FGC-6-1170
4			43	25-Oct-22	· ·	12-Sep-22	24-Jun-22 A		29	60	PFab 2-Line 6 - 2nd Floor (EL12.47~ EL23.47m) (Including Dosing syster	06-FGC-6-1180
			22	03-Dec-22	05-Oct-22	11-Nov-22			60	60	PFab 2-Line 6 - 3rd Floor (EL23.47~ EL34.47m) (Including As h and resid	06-FGC-6-1190
			60 60	12-Feb-23 12-Feb-23	29-Sep-22 29-Sep-22		30-Sep-21 A 30-Sep-21 A		137 137	180 180	PFab 2-Line 6 - Piping Fabrication	Piping Fabrication 06-FGC-6-1220
			-12		29-Sep-22	09-Mar-23	11-Oct-22		150	150		Piping Installation
			-12	25-Feb-23		09-Mar-23	11-Oct-22*		150	150	PFab 2-Line 6 - Piping Installation	06-FGC-6-1000
			66	05-Mar-23	05-Oct-22	29-Dec-22	31-Jul-22		152	152		E&I Fabrication
	31-Jul-22		66	05-Mar-23	05-Oct-22	29-Dec-22	31-Jul-22		152	152	PFab 2-Line 6 - E&I Fabrication	06-FGC-6-1230
			-12	09-Dec-22	19-Oct-22	21-Dec-22	31-Oct-22		52	52	DEab O Line C. E 81 Summert Installation	E&I Installation
			-12 -12	02-Dec-22 09-Dec-22	19-Oct-22 26-Oct-22	14-Dec-22 21-Dec-22	31-Oct-22* 07-Nov-22		45 45	45 45	PFab 2-Line 6 - E&I Support Installation PFab 2-Line 6 - E&I Cable Ladder Erection	06-FGC-6-1240 06-FGC-6-1250
			-12	27-Mar-23	29-Oct-22	08-Apr-23	10-Nov-22	0 /8	150	150		
			-12	27-Mar-23		08-Apr-23	10-Nov-22	0%	150	150	PFab 2-Line 6 - Insulation	06-FGC-6-1020
			-8	08-Dec-22	13-Jul-22	16-Dec-22	10-Apr-22 A		139	185	a Steel Structure	Fabrication of Mega Steel St
			-18	15-Nov-22	13-Jul-22		10-Apr-22 A		126	172		Material Procurement
			-18 48	17-Jul-22	13-Jul-22	-	10-Apr-22 A		5	60	Material Procurment (BM2)	16-8500-1 (6E)
24			-18	11-Oct-22 09-Aug-22	22-Sep-22 13-Jul-22	24-Aug-22 27-Aug-22			20 28	60 60	Material Procurment (BM3) Material Procurment (FM1)	16-8500-2 (6E) 16-8500-3 (6E)
			-18	01-Oct-22		19-Oct-22	30-May-22		53	60	Material Procument (FM2)	16-8500-4 (6E)
			-18	15-Nov-22	02-Oct-22	03-Dec-22	20-Oct-22		45	45	Material Procurment (FM3)	16-8500-5 (6E)
			2	08-Dec-22	_		25-Jun-22 A		129	160		Material Testing
1			2	08-Dec-22	10-Oct-22	06-Dec-22	08-Oct-22		60	60	Material Testing (FM2)	16-8500-10 (6E)
			1	04-Sep-22	10-Aug-22	03-Sep-22	25-Jun-22 A	56.67%	26	60	Material Testing (BM2)	16-8500-7 (6E)
	31-Jul-22		43		12-Sep-22	28-Sep-22	31-Jul-22		60	60	Material Testing (BM3)	16-8500-8 (6E)

ct No. EP/SP/66/12 Facilities, Phase 1	環境保護署 Environmental Protaction Department
2 Sep 58	Oct 59
22*	19-Oct-22, PF
12-Sep-22	20-0
26-Sep-22	10-Oct-22
26-Sep-22	· · · · · · · · · · · · · · · · · · ·
13-Sep-22*	27
	10-Oct-22
26-Sep-22 26-Sep-22	
15-Sep-22	
	&Secondary Steel Structure Erection, PFat £L34.47m) Primary & Secondary Steel Str 01-Oct-22, PFab 2-Line 5 - 4th Floor (E
	cluding Silencer ID fan), PFab 2-Line 5 - 1s 2;47~ EL23.47m) (Including Dosing system
2	
	- <u>-</u>
04-Oct-	22*
	24-Oct-22*
	31-001-22
	03-Nov-2
	rimary & Secondary Steel Structure Erectio loor(EL23.47~ EL34.47m) Primary & Secor 01-Oct-22, PFab 2-Line 6 - 4th Floor (E
	D <sub>i</sub> fan), PFab 2-Line 6 - 1st Floor (Below EL
12-Sep-22, PFab 2-Li 13-Sep-22	ne 6 - 2nd Floor (EL12.47~ EL23.47m) (Incl
	11-Oct-22*
	31-Oct-22*
	07-
-22, 04-Aug-22, Material Procurment (B 22, Material Procurment (BM3), Material erial Procurment (FM1), 27-Aug-22, 27-J	Procurment (BM3), 24-Aug-22
	Material Procu 20-Oct-22
03-Sep-22, Material Testing (BM2)	8-Oct-22 . Material Testing (BM2), 03-Sep-22 28-Sep-22, Material Testing (BM3)

	Activity Name	Original Duration	Remaining Duration	Activity % Current Start Complete	Current Finish	Late Start	Late Finish	Total Float MS	6 Hemarks	Jul	Aug 2
16-8500-9 (6E)	Material Testing (FM1)	60	26	56% 25-Jun-22 A	17-Sep-22	07-Aug-22	02-Sep-22	-15		56	57
Fabrication of Steel Struc	cture	170	139	17-Jun-22 A	16-Dec-22	13-Jul-22	01-Dec-22	-15			
16-8510 (6E)	Fabrication of Steel Structure (BM1) & Delivery	90	59	34.44% 17-Jun-22 A	· · ·	13-Jul-22	09-Sep-22	-18			
= 16-8520 (6E) = 16-8540 (6E)	Fabrication of Steel Structure (BM2) & Delivery Fabrication of Steel Structure (FM1) & Delivery	80 70	80 70	0% 04-Sep-22 0% 08-Oct-22	22-Nov-22 16-Dec-22	05-Sep-22	23-Nov-22 01-Dec-22	-15			04-Se
Off-site Fabrication of T		814	242	29-Mar-20 A		P	29-Mar-23	-13			
Material Procurement		608	65				03-Oct-22	0			
06-1050-3(1)	Electrical and Instrumentation Material Submission and Approval	90	24				03-Oct-22	35			·····
06-1060-2(1)	Pipe Material Procurement (Incl. FAT)	180	62	65.56% 28-Feb-21 A		-	03-Oct-22	0			
06-1060-3(1) Fabrication of Module (Potential)	Electrical and Instrumentation Material Procurement (Incl. FAT)	365 570	33 242	90.96% 29-Mar-20 A 30-Oct-21 A	· ·	01-Sep-22	29-Mar-23	32 0			
Turbine Module 1		518	155	30-Oct-21 A			01-Jan-23	0			
06-4010(6)	Turbine Module 1 - Steam Turbine 1 Fabrication	450	153	66% 30-Oct-21 A		02-Aug-22	01-Jan-23	0			
06-4020(6)	Turbine Module 1 - Generator & Equipment Installation	450	153	66% 05-Jan-22 A		-	01-Jan-23	2			
06-4040(6) 06-4040-1(M55)	Turbine Module 1 - TBS Tower 1 Fabrication Turbine Module 1 - TBS Tower 1 Erection & Installation	60 76	60 76	0% 15-Aug-22* 0% 14-Oct-22	13-Oct-22 28-Dec-22	19-Aug-22 18-Oct-22	17-Oct-22 01-Jan-23	4			15-Aug-22*
Turbine Module 2		450	227				14-Mar-23	4			
<b>06-4210(6)</b>	Turbine Module 2 - Steam Turbine 2 Fabrication	450	227	49.56% 28-Jan-22 A		31-Jul-22	14-Mar-23	0			-
06-4220(6)	Turbine Module 2 - Generator & Equipment Installation	450	227	49.56% 28-Jan-22 A	14-Mar-23	31-Jul-22	14-Mar-23	0			
06-4240(6)	Turbine Module 2 - TBS Tower 2 Fabrication	60	60	0% 15-Aug-22*			01-Nov-22	19			15-Aug-22*
Turbine Module 3 06-4410(6)	Turbine Module 3 - Steam Turbine 3 Fabrication	450 450	242 242	27-Feb-22 A 46.22% 27-Feb-22 A		31-Jul-22 31-Jul-22	29-Mar-23 29-Mar-23	0			
06-4420(6)	Turbine Module 3 - Generator & Equipment Installation	450	242	46.22% 27-Feb-22 A		31-Jul-22	29-Mar-23	0			
06-4440(6)	Turbine Module 3 - TBS Tower 3 Fabrication	60	60	0% 15-Aug-22*	13-Oct-22	18-Sep-22	16-Nov-22	34			15-Aug-22*
Procurement for Mechan	nical Treatment Plant Building Plant Equipment	343	312	13-Jun-21 A	07-Jun-23	01-Aug-22	08-Jun-23	1			
06-1150-1(1)	Mechanical Equipment Material Submission and Approval	180	123	31.67% 13-Jun-21 A	30-Nov-22	10-Aug-22	10-Dec-22	10			
06-1150-2(1)	Pipe Material Submission and Approval	180	180	0% 31-Jul-22	26-Jan-23		14-Mar-23	47		31-Jul-22	
06-1150-3(1)	Electrical and Instrumentation Material Submission and Approval	180	180	0% 31-Jul-22	26-Jan-23	15-Sep-22	13-Mar-23	46		31-Jul-22	
06-1160-1(1) 06-1160-2(1)	Mechanical Equipment Procurement (Incl. FAT) Pipe Material Procurement (Incl. FAT)	312 266	312 266	0% 31-Jul-22 0% 31-Jul-22	07-Jun-23 22-Apr-23	-	08-Jun-23 08-Jun-23	47		31-Jul-22 31-Jul-22	
06-1160-3(1)	Electrical and Instrumentation Material Procurement (Incl. FAT)	267	200	0% 31-Jul-22	23-Apr-23	· ·	08-Jun-23	47		31-Jul-22	
,	water Treatment Plant Equipment	212	243	23-Jun-22 A				60			
06-1190-1(1)	Mechanical Equipment Material Submission and Approval	90	31	65.56% 23-Jun-22 A	30-Aug-22	29-Sep-22	29-Oct-22	60			
06-1190-2(1)	Pipe Material Submission and Approval	90	31	65.56% 23-Jun-22 A	30-Aug-22	29-Sep-22	29-Oct-22	60			
06-1190-3(1)	Electrical and Instrumentation Material Submission and Approval	90	31	65.56% 29-Jul-22 A	30-Aug-22	29-Sep-22	29-Oct-22	60		29-Jul-22 A, 29-Jul-22 A 📃	
06-1200-1(1)	Mechanical Equipment Procurement (Incl. FAT)	212	212	0% 31-Aug-22	30-Mar-23	30-Oct-22	29-May-23	60			31-Aug-22
06-1200-2(1)	Pipe Material Procurement (Incl. FAT)	212	212	0% 31-Aug-22	30-Mar-23	30-Oct-22	29-May-23	60			31-Aug-22
06-1200-3(1)     Procurement for Desal 4	Electrical and Instrumentation Material Procurement (Incl. FAT)  & Demin Plant Equipment	212 60	212 33	0% 31-Aug-22 01-Jun-22 A		30-Oct-22 15-Oct-22	29-May-23	60 76			31-Aug-22
06-1240-1(1)	Mechanical Equipment Procurement (Incl. FAT)	60	33	45% 01-Jun-22 A	· · ·	15-Oct-22	16-Nov-22	76			
Procurement for HV Tra	Insformers and Associated Equipment	240	210	31-May-22	25-Feb-23	09-Oct-22	06-May-23	70			
Procurement of Switchboa		240	210	31-May-22	25-Feb-23		06-May-23	70			
06-2090(1)	Material Submission and Approval	60	30	50% 31-May-22			07-Nov-22	70			
06-2100(1) Procurement for Onsho	Material & Equipment Procurement	240 60	210 60	12.5% 31-May-22 31-Jul-22	25-Feb-23 28-Sep-22		06-May-23 31-Oct-22	70 33			
06-1350	Supplier Submission and Approval	60	60	0% 31-Jul-22	28-Sep-22		31-Oct-22 31-Oct-22	33			
	te Fabrication of Pipe Bridges (Incl. Pipings)	180	180	15-Aug-22			01-Mar-23	19			
_Fabrication of Pipe Bridge		180	180	15-Aug-22	10-Feb-23	03-Sep-22	01-Mar-23	19			
Pipe Bridge B Between Co		180	180	15-Aug-22			01-Mar-23	19			
06-5300(6)	Structure Cutting, Painting & Pre-assembly	180	180	0% 15-Aug-22*			01-Mar-23	19			15-Aug-22*
Procurement for Draina 06-1620-3(M55)	Material Submission & Equipment Procurement (Caisson 13)	60 30	60 30	04-Aug-22 0% 04-Aug-22	02-Sep-22	-	02-Oct-22 02-Sep-22	0		04-Aug	22
06-1620-4(M55)	Delivery to Site	30	30	0% 03-Sep-22	02-Oct-22	-	02-Oct-22	0			03-Sep
Procurement for Cranag		240	240	30-Aug-22			01-May-23	5			· · · · · · · · · · · · · · · · · · ·
EOTC		240	240	30-Aug-22	26-Apr-23	04-Sep-22	01-May-23	5			
06-1910	Material & Equipment Procurement	180	180	0% 30-Aug-22		· ·	02-Mar-23	5			30-Aug-22
06-1920	Factory Acceptance Test (FAT)	192	192	0% 17-Oct-22	26-Apr-23	22-Oct-22	01-May-23	5			
Procurement for Air Qua 06-2150(1)	ality Monitoring Station Equipment Material Submission and Approval	60 60	60 60	29-Sep-22 0% 29-Sep-22		18-Oct-22 18-Oct-22	16-Dec-22 16-Dec-22	19 19			
	and Insulation for on site installations	305	244	31-May-22		31-Jul-22	31-Mar-23	0			
06-2250(1)	Material Submission and Approval	60	4	93.33% 31-May-22	03-Aug-22	31-Jul-22	03-Aug-22	0			Material Submission and Approval
06-2260(1)	Material & Equipment Procurement	240	240	0% 04-Aug-22	31-Mar-23		31-Mar-23	0		04-Auç	
Procurement for Buildin	ng Finishes Materials (Doors, windows and louvers ie)	250	250	31-Jul-22	06-Apr-23	24-Sep-22	31-May-23	55			
06-8000(6)	Incineration Plant Building - Material Submission, Procurement, FAT and	250	250	0% 31-Jul-22	06-Apr-23		31-May-23	55		31-Jul-22	
Maritime Works		283	222		09-Mar-23		20-Apr-23	42			
Marine Construction		283	222	31-May-22			20-Apr-23	42			
_Phase I - Construction of F	Perimeter Seawalls	60	30	31-May-22	29-Aug-22	03-Oct-22	01-Nov-22	64			
Month Rollin	ng Programme (July 2022)								Remaining Work Actual Work	<ul> <li>Actual Miles</li> <li>Critical Mile</li> </ul>	

act No. EP/SP/66/12 現境保護署 Environmental Pro nt Facilities, Phase 1 Material Testing (FM1), 17-Sep-22, 17-Sep-22, Material Testing Fabrication of Steel Structure (BM1) & Deli ep-22 🔲 08-Oct-22 -----29-Aug-22, Electrical and Instrumentation Material Submission and Approval, Electri Pipe Material Procurement (Incl. FA 01-Sep-22, Electrical and Instrumentation Material Procurement (Incl. FAT), Electrical and Instrumentation (Incl. FAT), Electric 13-Oct-22, Turbine Mo 14-Oct-22 13-Oct-22, Turbine Mo 13-Oct-22, Turbine Mo 30-Aug-22, Mechanical Equipment Material Submission and Approval, Mechanical 30-Aug-22, Pipe Material Submission and Approval, Pipe Material Submission and 30-Aug-22, Electrical and Instrumentation Material Submission and Approval, Elect 01-Sep-22, Mechanical Equipment Procurement (Incl. FAT), Mechanical Equipm 29-Aug-22, Material Submission and Approval, Material Submission and Approval, 2 28-Sep-22, Supplier Submission and Appr 02-Sep-22, Material Submission & Equipment Procurement (Caisson 13) -22 02-Oct-22, Delivery to Site 17-Oct-22 -----29-Sep-22 💻 ,03-Aug-22,03-Aug-22,Material Submission and Approval

古 宵 西 格 新 - 紙 筆 磨 KEPPELSEGNERS-ZNEN HUA700	INT VENTURE								Integra	ated Waste Management I
y ID	Activity Name	Original Duration	Remaining Duration	Activity % Current Start Complete	Current Finish	Late Start	Late Finish	Total Float M56 Remarks	Jul 56	2022 Aug 57
Seawall and Berth at DC		60 60	30 30	31-May-22 31-May-22 3	29-Aug-22 29-Aug-22	03-Oct-22 03-Oct-22	01-Nov-22 01-Nov-22	64 64		
Remain Works	iks	60	30	· · ·	29-Aug-22 29-Aug-22	03-Oct-22	01-Nov-22	64		
08-1120-3(M55)	Construction of Seawall and Wave Wall Extension from +3mPD to Deck	60	30	50% 31-May-22.	-	03-Oct-22	01-Nov-22	64		29-,
Phase II - Reclamation, B Reclamation	Breakwater and Berth Construction	222 202	222 202	31-Jul-22 20-Aug-22	09-Mar-23 09-Mar-23	22-Aug-22 22-Aug-22		42		
Reclamation Works		202	202	×	09-Mar-23	22-Aug-22		42		
Surcharge Filling 08-3060(6)	Fill up +7.5 to +11&12mPD at West Edge Area (Stage 6) (55,000m3@ 2	22 22	22 22	20-Aug-22 0% 20-Aug-22	10-Sep-22 10-Sep-22	01-Oct-22 01-Oct-22	22-Oct-22 22-Oct-22	42 42		20-Aug-22
Surcharge Period	Fill up +7.5 to +11&1211FD at West Edge Area (Stage 6) (53,000115@ 2	180	180	11-Sep-22	09-Mar-23	23-Oct-22	22-001-22 20-Apr-23	42		20-Aug-22
08-3120-1(6)	Loading @ +11&12mPD at West Edge Area (Stage 6)	180	180	0% 11-Sep-22	09-Mar-23	23-Oct-22	20-Apr-23	42		1
Surcharge Removal	Remove Surcharge at East Edge Area (Stage 5) (66,000 m3 @ 4000 m3/d)	17 17	17 17	20-Aug-22 0% 20-Aug-22	05-Sep-22	-	07-Sep-22 07-Sep-22	2		20-Aug-22
Seawall and Berth at Ma		30	30	31-Jul-22	29-Aug-22	-	01-Nov-22	64		20-109-22
Remain Works		30	30	31-Jul-22	29-Aug-22	03-Oct-22		64		
08-1330(2)	Construction of Seawall and Wave Wall Extension from +3mPD to Deck I	30 391	30 135	0% 31-Jul-22	29-Aug-22	03-Oct-22 11-Jul-22	01-Nov-22 20-Dec-22	64	31-Jul-22	29-,
Foundation Works	ste Bunker & Tipping Hall Bld Foundation	348	124		01-Dec-22		20-Dec-22	19		
Piling Works (Driven H-p		348	109		17-Nov-22		20-Dec-22	33		
Piling Stage 1 (Module 1		258	44		12-Sep-22	16-Jul-22	28-Aug-22	-15		
Bunker (Subzone 11&1	12) Driven H Pile Installations (347 nrs ~40m(D), @60m/d 2 Groups)	258 114	44 36	29-Dec-21 / 68.42% 29-Dec-21 /	A 12-Sep-22 A 04-Sep-22	16-Jul-22 16-Jul-22	28-Aug-22 20-Aug-22	-15 -15 187/347 completed, 1		
09-1130	Pile Load Test	8	8	0% 05-Sep-22		21-Aug-22	-	-15		05-Sep-22
Piling Stage 3 (Module 3		99	73		17-Nov-22		20-Dec-22			
Bunker (Subzone 25, 2	26&27) Driven H Pile Installations (297 nrs ~40m(D), @60m/d 2 Groups)	99 99	73 73	07-Jul-22 A 25.8% 07-Jul-22 A	17-Nov-22 17-Nov-22		20-Dec-22 20-Dec-22	33 33 28/297 completed, 97	-22 A	
Piling Works (Socket H-p		211	110			13-Aug-22		20		
Piling Stage 1 (Module 1	1)	138	71	'	10-Oct-22	13-Aug-22		22		
Tipping Hall (Subzone	Prebored H Pile Installations (43 nrs, 2 Groups @4d/no.) Group (1# 2#)	131 86	71 16	06-May-22 81.4% 21-Jun-22 A	10-Oct-22	-	31-Oct-22 31-Oct-22	22 22 32/43 completed, 6 ir		
09-2230	Prebored H Pile Installations (41 nrs, 2 Groups @4d/no.) Group (1# 2#)	82	55	32.9% 06-May-22		13-Aug-22		14 9/41 completed, 9 inp		
Hanker (Subzone 3&4a	-	96	17		16-Aug-22	-	05-Sep-22	20		
09-2260	Prebored H Pile Installations (48 nrs, 2 Groups @4d/no.) Group (3# 4#)	96	17	82.3% 30-Apr-22 A	-	-	05-Sep-22	20 36/48 completed, 7 ir		16-Aug-22, Prebored
Piling Stage 2 (Module 2		102 102	93 93		18-Nov-22 18-Nov-22	_	07-Dec-22 07-Dec-22	20		
09-2240	Prebored H Pile Installations (51 nrs, 2 Groups @4d/no.) Group (3# 4#)	102	93	8.8% 07-Jul-22 A	18-Nov-22	05-Sep-22	07-Dec-22	20 9 inprogress	-22 A	
Pile Cap Construction		80	80		01-Dec-22			-15		
Pile Cap Stage 1 (Modul	le 1)	80 61	80 61	13-Sep-22 02-Oct-22	01-Dec-22 01-Dec-22	29-Aug-22 16-Oct-22	16-Nov-22 16-Nov-22	-15 -15		
09-1180	Excavation to Pile Cap Formation	25	25	0% 02-Oct-22	27-Oct-22	16-Oct-22	09-Nov-22	14		
09-1190	Pile Cut-off & Capping Plate (76 nrs, 4nr/d)	19	19	0% 11-Oct-22	30-Oct-22	25-Oct-22	12-Nov-22	14		
9-1200	Pile Caps Construction (26nrs 8set @ 1/7d)	23 57	23 57	0% 09-Nov-22	01-Dec-22 08-Nov-22	25-Oct-22 29-Aug-22	16-Nov-22	-15 -15		
	Excavation to Pile Cap Formation	25	25	0% 13-Sep-22			22-Sep-22	-15		
<b>—</b> 09-2400	Pile Cut-off & Capping Plate	19	19	0% 26-Sep-22	14-Oct-22	29-Sep-22		3		
09-2410	Pile Caps and Raft Foundation Construction (50m x 36m 4set @100m2/70	32	32	0% 08-Oct-22	08-Nov-22	23-Sep-22		-15		
Boiler Building & Flue Ga	iler & Flue Gas Treatment Bld Foundation	180 178	124 122		01-Dec-22	11-Jul-22 11-Jul-22	07-Dec-22	6 8		
Piling Works (Driven H-		113	24			18-Jul-22		16		
Piling Stage 2 (Module		81	11		-	18-Jul-22	-	8 10 040/055 Completed :		
09-1350 09-1360	Driven H Pile Installations (244 nrs ~40m(D), @60m/d 2 Groups) Pile Load Test	81 9	2	97.53% 01-Jun-22 A 0% 02-Aug-22			19-Jul-22 18-Aug-22	-13 248/255 Completed, 8		Driven H Pile Installations (244 nrs ~40m (1 -22 10-Aug-22, Pile Load Test
Piling Stage 3 (Module		80	24		24-Aug-22	-	08-Sep-22	16		
09-1380	Driven H Pile Installations (214 nrs ~40m(D), @60m/d 2 Groups)	72	16	77.5% 05-Jun-22 A	-	-	31-Aug-22	16 122/216 Completed, 9		16-Aug-22, Driven H P
09-1390	Pile Load Test	8	8	0% 16-Aug-22	-		· · ·	16		16-Aug-22 24-Aug-22,
Pile Caps Construction		170 118	122 21			11-Jul-22 11-Jul-22		-20		
09-1420	Pile Caps Construction (28 nrs, 5set @1/7d)	41	11	73.17% 12-Jun-22 A			22-Jul-22	-19		Pile Caps Construction (28 nrs
09-1420-3(6D)	Pile Caps Construction (28 nrs, 5set @1/7d)	42	21	50% 28-Jun-22 A	-		31-Jul-22	-20		Pile Caps Const
Pile Cap Stage 2 (Modu 09-1430	Let Excavation to Pile Cap Formation	87 45	68 26	15-Jul-22 A 42.3% 15-Jul-22 A	12-Oct-22 31-Aug-22	24-Jul-22 24-Jul-22	29-Sep-22 18-Aug-22	-13 -13	2 A, 15-Jul-22 A	
09-1440	Pile Cut-off & Capping Plate (375 nrs, 10nr/d)	38	38	0% 06-Aug-22	-		22-Sep-22	10	OF	E E E E E E E E E E E E E E E E E E E
<b>09-1450</b>	Pile Caps Construction (100 nrs, 8set @1/7d)	87	68	21.88% 15-Jul-22 A	-	24-Jul-22	29-Sep-22	-13	2 A. 15-Jul-22 A	
Pile Cap Stage 3 (Modu		90	90		29-Nov-22		07-Dec-22	8		01-Sep-22
<ul><li>09-1460</li><li>09-1470</li></ul>	Excavation to Pile Cap Formation Pile Cut-off & Capping Plate (376 nrs, 10nr/d)	45 38	45 38	0% 01-Sep-22 0% 15-Sep-22			23-Oct-22 30-Nov-22	39		01-Sep-22
09-1470	Pile Caps Construction (52 nrs, 4set @1/7d)	87	87	0% 13-Sep-22 0% 04-Sep-22			07-Dec-22	8		04-Sep-22
RC Base Slab		138	110	02-Jun-22 A	01-Dec-22	26-Jul-22	18-Nov-22	-13		
10-1580	Base Slab for TPU (Module 1)	60	39	35% 02-Jun-22 A		26-Jul-22	02-Sep-22	-19		

<b>3-Month Rolling Programme</b>	(July	2022)
Page 13 of 15		

\_ \_

Remaining Work Actual Work

Actual Milestone **◇** 

Critical Milestone

Critical Remaining Work


Driven H Pile Installations (347 ns ~40m(D), @60m/d 2 Groups), 04-Sep 22 12-Sep-22, Pile Load Test 10-Oct-22, Prebored H 10-Oct-22, Prebored H Pile Installations (41 24-Sep-22, Prebored H Pile Installations (41 d H Pile Installations (48 nrs, 2 Groups @4d/no.) Group (3# 4#), Prebored H Pil 02-Oct-22 11-Oct-22 13-Sep-22 07-Oct-22, Excavation to P 26-Sep-22 07-Oct-22, Excavation to P 26-Sep-22 07-Oct-22, Excavation to P 26-Sep-22 07-Oct-22, Excavation to P 26-Sep-22 07-Oct-22, Excavation to P (D), @60m/d 2 Groups), 01-Aug-22, 01-Aug-22, Driven H Pile Installations (24 Pile Installations (214 nrs ~40m(D), @60m/d 2 Groups), Driven H Pile Installations (24 Pile Installations (214 nrs ~40m(D), @60m/d 2 Groups), Driven H Pile Installations (24 Pile Load Test rs, 5set @117d), 10-Aug-22, 10-Aug-22, Pile Caps Construction (28 nrs, 5set @ struction (28 nrs, 5set @117d), 20-Aug-22, Pile Caps Construction (28 nrs, 5set @ 13-Sep-22, Pile Cut-off & Capping Plate (375 nrs, 10nr/d) Pile Caps Construction 13-Sep-22, Pile Cut-off & Capping Plate (375 nrs, 10nr/d) Pile Caps Construction (28 nrs, 5set @ 13-Sep-22, Pile Cut-off & Capping Plate (375 nrs, 10nr/d) Pile Caps Construction (28 nrs, 5set @ 15-Oct-22, Excavation to Pile Cap Construction (28 nrs, 5set @ 15-Oct-22, Excavation to Pile Cap Construction (28 nrs, 5set @ 15-Oct-22, Excavation to Pile Cap Construction (28 nrs, 5set @ 15-Oct-22, Excavation to Pile Cap Construction (28 nrs, 10nr/d) Pile Caps Construction (28 nrs, 5set @ 15-Oct-22, Excavation to Pile Cap Construction (28 nrs, 10nr/d) Pile Caps Construction (28 nrs, 5set @ 15-Oct-22, Excavation to Pile Cap Construction (28 nrs, 10nr/d) Pile Caps Construction (28 n	, , , , , , , , , , , , , , , , , , , ,	環境保護署 Environmental Protection Department
10-Sep-22, Fill up +7.5 to +118.12mPD at West Edge Area (Stage 11-Sep-22         05-Sep-22, Remove Surcharge at East Edge Area (Stage 5) (66,000m3         Aug-22, Construction of Seawall and Wave Wall Extension from +3mPD to Dr         Driven H Pile Installations (347 nrs ~40m(D), @60m/d 2 Groups), 04-Sep         12-Sep-22, Pile Load Test         12-Sep-22, Pile Load Test         12-Sep-22, Pile Load Test         02-Oct-22, Prebored H         14-Difference         02-Oct-22, Prebored H Pile Installations (41         14 Pile Installations (48 nrs, 2 Groups @4dno.) Group (3# 4#), Prebored H Pile         02-Oct-22         13-Sep-22         02-Oct-22         02-Oct-22         13-Sep-22         03-Oct-22, Excavation to P         26-Sep-22         04-Oct-22, Driven H Pile Installations (24         04-Oct-22, Driven H Pile Installations (24         Pile Installations (214 nrs ~40m(D), @60m/d 2 Groups), Driven H Pile Installations (24         Pile Load Test         rs, Set @1/7d), 10-Aug-22, 10-Aug-22, Pile Cape Construction (28 nrs, Sset @         (15-Oct-22, Excavation to Pile Cape Construction (28 nrs, Sset @1/7d), 20-Aug-22, Pile Cape Construction (28 nrs, Sset @1/7d), 10-Aug-22, Pile Cu-off & Capping Pilate (375 nrs, 10nr/d)         Pile Load Test       15-Oct-22, Excavation to Pile Cape Construction (28 nrs, Sset @1/7d), 20-Aug-22, Pile Cu-off & Capping Pilate (		
10-Sep-22, Fill up +7.5 to +118.12mPD at West Edge Area (Stage 11-Sep-22         05-Sep-22, Remove Surcharge at East Edge Area (Stage 5) (66,000m3         Aug-22, Construction of Seawall and Wave Wall Extension from +3mPD to Dr         Driven H Pile Installations (347 nrs ~40m(D), @60m/d 2 Groups), 04-Sep         12-Sep-22, Pile Load Test         12-Sep-22, Pile Load Test         12-Sep-22, Pile Load Test         02-Oct-22, Prebored H         14-Difference         02-Oct-22, Prebored H Pile Installations (41         14 Pile Installations (48 nrs, 2 Groups @4dno.) Group (3# 4#), Prebored H Pile         02-Oct-22         13-Sep-22         02-Oct-22         02-Oct-22         13-Sep-22         03-Oct-22, Excavation to P         26-Sep-22         04-Oct-22, Driven H Pile Installations (24         04-Oct-22, Driven H Pile Installations (24         Pile Installations (214 nrs ~40m(D), @60m/d 2 Groups), Driven H Pile Installations (24         Pile Load Test         rs, Set @1/7d), 10-Aug-22, 10-Aug-22, Pile Cape Construction (28 nrs, Sset @         (15-Oct-22, Excavation to Pile Cape Construction (28 nrs, Sset @1/7d), 20-Aug-22, Pile Cape Construction (28 nrs, Sset @1/7d), 10-Aug-22, Pile Cu-off & Capping Pilate (375 nrs, 10nr/d)         Pile Load Test       15-Oct-22, Excavation to Pile Cape Construction (28 nrs, Sset @1/7d), 20-Aug-22, Pile Cu-off & Capping Pilate (		
10-Sep-22. Fill up +7.5 to + 118.12mPD at West Edge Area (Stage 11-Sep-22         05-Sep-22. Remove Surcharge at East Edge Area (Stage 5) (66,000m3         Aug-22, Construction of Seawall and Wave Wall Extension from +3mPD to Dr         Driven H Pile installations (347 nrs ~40m(D), @60m/d 2 Groups), 04-Sep         12-Sep-22, Pile Load Test         12-Sep-22, Pile Load Test         12-Sep-22, Pile Load Test         02-Oct-22, Prebored H         14-Pile installations (48 nrs, 2 Groups @4dino.) Group (3# 4#), Prebored H Pile         02-Oct-22         02-Oct-22         13-Sep-22         02-Oct-22         13-Sep-22         02-Oct-22         13-Sep-22         02-Oct-22         13-Sep-24         04-Oct-22, Precoved H Pile Installations (24         Pile Installations (24 nrs - 40m(D), @60m/d 2 Groups), Driven H Pile Installations (24         Pile Load Test         s, Set @1/7d), 10-Aug-22, 10-Aug-22, Pile Cape Construction (28 nrs, Sset @         15-Oct-22, Pile Cut-off & Capping Pilate (375 nrs, 10nr/d)         Pile Load Test         15-Sep-22       20-Aug-22, Pilate (375 nrs, 10nr/d)         Pile Cape Construction to Pile Cape Construct	Aug-22, Construction of Seawall and W	/ave Wall Extension from +3mPD to Decl
11-Sep-22         05-Sep-22, Remove Surcharge at East Edge Area (Stage 5) (66,000n 3         Aug-22, Construction of Seawall and Wave Wall Extension from +3mPD to D         Driven H Pile Installations (347 nrs -40m(D), @60m/d 2 Groups), 04-Seg         12-Sep-22, Pile Load Test         12-Sep-22, Pile Load Test         12-Sep-22, Pile Load Test         02-Oct-22, Prebored H Pile Installations (41         14 Pile Installations (48 nrs, 2 Groups @4d/no.) Group (3# 4#), Prebored H Pile         02-Oct-22         02-Oct-22         13-Sep-22         02-Oct-22         03-Oct-22         04-Oct-22         05-Oct-22         07-Oct-22, Excavation to P         26-Sep-22         07-Oct-22, Excavation to P         26-Sep-22         07-Oct-22, Excavation to P         26-Sep-22         08-Oct-22         09-Oct-22         14-Oct-22, Pile Component H Pile Installations (24         Pile Installations (214 nrs -40m(D), @60m/d 2 Groups), Driven H Pile Installations (24 nrs, 5set @ 17d), 20-Aug-22, Driven H Pile Cape Construction (28 nrs, 5set @ 17d), 20-Aug-22, Pile Cape Construction (28 nrs, 5set @ 17d), 20-Aug-22, 20-Aug-22, Pile Cape Construction (28 nrs, 5set @ 17d), 20-Aug-22, Pile Cape Construction to Pile Cape Construction (28 nrs, 5set @ 17d), 20-Aug-22, Pile Cut-df & Capping Piate (375 nrs, 10nr/d)         15-Sep-22 <td< td=""><td>,</td><td></td></td<>	,	
11-Sep-22         05-Sep-22, Remove Surcharge at East Edge Area (Stage 5) (66,000n 3         Aug-22, Construction of Seawall and Wave Wall Extension from +3mPD to D         Driven H Pile Installations (347 nrs -40m(D), @60m/d 2 Groups), 04-Seg         12-Sep-22, Pile Load Test         12-Sep-22, Pile Load Test         12-Sep-22, Pile Load Test         02-Oct-22, Prebored H Pile Installations (41         14 Pile Installations (48 nrs, 2 Groups @4d/no.) Group (3# 4#), Prebored H Pile         02-Oct-22         02-Oct-22         13-Sep-22         02-Oct-22         03-Oct-22         04-Oct-22         05-Oct-22         07-Oct-22, Excavation to P         26-Sep-22         07-Oct-22, Excavation to P         26-Sep-22         07-Oct-22, Excavation to P         26-Sep-22         08-Oct-22         09-Oct-22         14-Oct-22, Pile Component H Pile Installations (24         Pile Installations (214 nrs -40m(D), @60m/d 2 Groups), Driven H Pile Installations (24 nrs, 5set @ 17d), 20-Aug-22, Driven H Pile Cape Construction (28 nrs, 5set @ 17d), 20-Aug-22, Pile Cape Construction (28 nrs, 5set @ 17d), 20-Aug-22, 20-Aug-22, Pile Cape Construction (28 nrs, 5set @ 17d), 20-Aug-22, Pile Cape Construction to Pile Cape Construction (28 nrs, 5set @ 17d), 20-Aug-22, Pile Cut-df & Capping Piate (375 nrs, 10nr/d)         15-Sep-22 <td< td=""><td></td><td></td></td<>		
11-Sep-22         05-Sep-22, Remove Surcharge at East Edge Area (Stage 5) (66,000n 3         Aug-22, Construction of Seawall and Wave Wall Extension from +3mPD to D         Driven H Pile Installations (347 nrs ~40m(D), @60m/d 2 Groups), 04-Sep         12-Sep-22, Pile Load Test         12-Sep-22, Pile Load Test         12-Sep-22, Pile Load Test         02-Oct-22, Prebored H Pile Installations (41         1H Pile Installations (48 nrs, 2 Groups @4d/no.) Group (3# 4#), Prebored H Pile         02-Oct-22         02-Oct-22         13-Sep-22         02-Oct-22         13-Sep-22         02-Oct-22         13-Sep-24         02-Oct-22         03-Oct-22         04-Oct-22, Excavation to P         26-Sep-22       07-Oct-22, Excavation to P         26-Sep-22       07-Oct-22, Excavation to P         04-Oct-22       14-Oct-22, Pile C         08-Oct-22       08-Oct-22         09       09         10-Get-22       14-Oct-22, Pile C         08-Oct-22       14-Oct-22, Pile C         09       06-Oct-22         11-Oct-22, Pile Cape Construction (28 nrs, 5set @         12-Oct-22, Pile Cape Construction (28 nrs, 5set @         13-Sep-22, Pile Cut-otf & Capping Piate (375 nrs, 10nr/d)	10-Sen-22 Fill un +7.5 to	+11&12mPD at West Edge Area (Stage
OS-Sep-22, Remove Surcharge at East Edge Area (Stage 5) (66,000m 3 Aug-22, Construction of Seawall and Wave Wall Extension from +3mPD to Dr Driven H Pile Installations (347 nrs ~40m(D), @60m/d 2 Groups), 04-Seg Driven H Pile Installations (347 nrs ~40m(D), @60m/d 2 Groups), 04-Seg Driven H Pile Installations (347 nrs ~40m(D), @60m/d 2 Groups), 04-Seg Driven H Pile Installations (347 nrs ~40m(D), @60m/d 2 Groups), 04-Seg Driven H Pile Installations (48 nrs, 2 Groups @4d/nc.) Group (3# 4#), Prebored H Pile Driven H Pile Installations (48 nrs, 2 Groups @4d/nc.) Group (3# 4#), Prebored H Pile Driven H Pile Installations (48 nrs, 2 Groups @4d/nc.) Group (3# 4#), Prebored H Pile Driven H Pile Installations (48 nrs, 2 Groups @4d/nc.) Group (3# 4#), Prebored H Pile Driven H Pile Installations (48 nrs, 2 Groups @4d/nc.) Group (3# 4#), Prebored H Pile Driven H Pile Installations (48 nrs, 2 Groups @4d/nc.) Group (3# 4#), Prebored H Pile Driven H Pile Installations (48 nrs, 2 Groups @4d/nc.) Group (3# 4#), Prebored H Pile Driven H Pile Installations (24 nrs ~ 40m(D), @60m/d 2 Groups), Driven H Pile Installations (24 Pile Installations (214 nrs ~ 40m(D), @60m/d 2 Groups), Driven H Pile Installations (24 Pile Load Test rs, Seet @1/7d), 10-Aug-22, 10-Aug-22, Pile Caps Construction (28 nrs, Seet @17/d), 20-Aug-22, 20-Aug-22, Pile Caps Construction (28 nrs, Seet @17/d), 20-Aug-22, 20-Aug-22, Pile Caps Construction (28 nrs, Seet @17/d), 20-Aug-22, 20-Aug-22, Pile Caps Construction (28 nrs, Seet @17/d), 20-Aug-22, 20-Aug-22, Pile Caps Construction (28 nrs, Seet @17/d), 20-Aug-22, 20-Aug-22, Pile Caps Construction (28 nrs, Seet @17/d), 20-Aug-22, 20-Aug-22, Pile Caps Construction (28 nrs, Seet @17/d), 20-Aug-22, 20-Aug-22, Pile Caps Construction (28 nrs, Seet @17/d), 20-Aug-22, 20-Aug-22, Pile Caps Construction (28 nrs, Seet @17/d), 20-Aug-22, 20-Aug-22, Pile Caps Construction (28 nrs, Seet @17/d), 20-Aug-22, 20-Aug-22, Pile Caps Construction (28 nrs, Seet @17/d), 20-Aug-22, 20-Aug-22, Pile Caps Construction (28 nrs, Seet @17/d),		
Aug-22, Construction of Seawall and Wave Wall Extension from +3mPD to Dr Driven H Pile Installations (347 nrs ~40m(D), @60m/d 2 Groups), 04-Sep 22 12-Sep-22, Pile Load Test 12-Sep-22, Pile Load Test 12-Sep-22, Prebored H Pile Installations (41 24-Sep 22, Prebored H Pile Installations (41 14 Pile Installations (48 nrs, 2 Groups @4d/nc), Group (3# 4#), Prebored H Pil 02-Oct-22 11-Oct-22 11-Oct-22, Excavation to Pile 26-Sep-22 07-Oct-22, Excavation to Pile 26-Sep-22 07-Oct-22, Excavation to Pile 26-Sep-22 07-Oct-22, Excavation to Pile 08-Oct-22 Pile Installations (214 nrs ~40m(D), @60m/d 2 Groups), Driven H Pile Installations (24 Pile Installations (214 nrs ~40m(D), @60m/d 2 Groups), Driven H Pile Installations (24-Sep-22, Pile Caps Construction (28 nrs, 5set @ 13-Sep-22, Pile Caps Construction (28 nrs, 5set @ 15-Oct-22, Exca	11-Sep-22	
Driven H Pile Installations (347 nrs ~40m(D), @60m/d 2 Groups), 04-Sep 22 12-Sep-22, Pile Load Test 10-Oct-22, Prebored H 24-Sep-22, Prebored H Pile Installations (41 1H Pile Installations (48 nrs, 2 Groups @4d/nc.) Group (3# 4#), Prebored H Pil 02-Oct-22 11-Oct-22 11-Oct-22, Excavation to Pile 26-Sep-22 07-Oct-22, Excavation to Pile Case Construction (28 nrs, 5set @ 08-Oct-22 09-Oct-22, Diven H Pile Installations (24 Pile Installations (214 nrs ~40m(D), @60m/d 2 Groups), Driven H Pile Installations (24 Pile Load Test rs, 5set @1/70), 10-Aug-22, 10-Aug-22, Orl-Aug-22, Driven H Pile Installations (24 Pile Load Test 13-Sep-22	05-Sep-22, Remove Surcharge a	at East Edge Area (Stage 5) (66,000m 3 @
Driven H Pile Installations (347 nrs ~40m(D), @60m/d 2 Groups), 04-Sep 22 12-Sep-22, Pile Load Test 10-Oct-22, Prebored H 24-Sep-22, Prebored H Pile Installations (41 1H Pile Installations (48 nrs, 2 Groups @4d/nc.) Group (3# 4#), Prebored H Pil 02-Oct-22 11-Oct-22 11-Oct-22, Excavation to Pile 26-Sep-22 07-Oct-22, Excavation to Pile Case Construction (28 nrs, 5set @ 08-Oct-22 09-Oct-22, Diven H Pile Installations (24 Pile Installations (214 nrs ~40m(D), @60m/d 2 Groups), Driven H Pile Installations (24 Pile Load Test rs, 5set @1/70), 10-Aug-22, 10-Aug-22, Orl-Aug-22, Driven H Pile Installations (24 Pile Load Test 13-Sep-22		
<ul> <li>12-Sep-22, Pile Load Test</li> <li>10-Oct-22, Prebored H</li> <li>24-Sep 22, Prebored H Pile Installations (41</li> <li>14 Pile Installations (48 nrs, 2 Groups @4d/no.) Group (3# 4#), Prebored H Pile</li> <li>02-Oct-22</li> <li>02-Oct-22</li> <li>11-Oct-22</li> <li>11-Oct-22</li> <li>12-Sep-22</li> <li>07-Oct-22, Excavation to P</li> <li>26-Sep-22</li> <li>07-Oct-22, Excavation to P</li> <li>26-Sep-22</li> <li>08-Oct-22</li> <li>14-Oct-22, Pile C</li> <li>08-Oct-22</li> <li>08-Oct-22</li> <li>14-Oct-22, Pile C</li> <li>08-Oct-22</li> <li>14-Oct-22, Pile C</li> <li>08-Oct-22</li> <li>14-Oct-22, Pile C</li> <li>15-Sep-22</li> <li>22-Oct-22</li> </ul>	Aug-22, Construction of Seawall and W	/ave Wall Extension from +3mPD to Decl
<ul> <li>12-Sep-22, Pile Load Test</li> <li>10-Oct-22, Prebored H</li> <li>24-Sep 22, Prebored H Pile Installations (41</li> <li>14 Pile Installations (48 nrs, 2 Groups @4d/no.) Group (3# 4#), Prebored H Pile</li> <li>02-Oct-22</li> <li>02-Oct-22</li> <li>11-Oct-22</li> <li>11-Oct-22</li> <li>12-Sep-22</li> <li>07-Oct-22, Excavation to P</li> <li>26-Sep-22</li> <li>07-Oct-22, Excavation to P</li> <li>26-Sep-22</li> <li>08-Oct-22</li> <li>14-Oct-22, Pile C</li> <li>08-Oct-22</li> <li>08-Oct-22</li> <li>14-Oct-22, Pile C</li> <li>08-Oct-22</li> <li>14-Oct-22, Pile C</li> <li>08-Oct-22</li> <li>14-Oct-22, Pile C</li> <li>15-Sep-22</li> <li>22-Oct-22</li> </ul>		
<ul> <li>12-Sep-22, Pile Load Test</li> <li>10-Oct-22, Prebored H</li> <li>10-Oct-22, Prebored H</li> <li>11 Pile Installations (48 nrs, 2 Groups @4d/no.) Group (3# 4#), Prebored H Pile</li> <li>02-Oct-22</li> <li>02-Oct-22</li> <li>11-Oct-22</li> <li>11-Oct-22</li> <li>12-Sep-22</li> <li>07-Oct-22, Excavation to P</li> <li>26-Sep-22</li> <li>07-Oct-22, Excavation to P</li> <li>26-Sep-22</li> <li>08-Oct-22</li> <li>14-Oct-22, Pile C</li> <li>08-Oct-22</li> <li>08-Oct-22</li> <li>14-Oct-22, Pile C</li> <li>08-Oct-22</li> <li>14-Oct-22, Pile C</li> <li>08-Oct-22</li> <li>14-Oct-22, Pile C</li> <li>08-Oct-22</li> <li>14-Oct-22, Pile C</li> <li>14-Oct-22, Pile C</li> <li>14-Oct-22, Pile C</li> <li>14-Oct-22, Pile C</li> <li>15-Sep-22</li> <li>15-Sep-22</li> <li>22-Oct-22</li> </ul>		
<ul> <li>12-Sep-22, Pile Load Test</li> <li>10-Oct-22, Prebored H</li> <li>10-Oct-22, Prebored H</li> <li>11 Pile Installations (48 nrs, 2 Groups @4d/no.) Group (3# 4#), Prebored H Pile</li> <li>02-Oct-22</li> <li>02-Oct-22</li> <li>11-Oct-22</li> <li>11-Oct-22</li> <li>12-Sep-22</li> <li>07-Oct-22, Excavation to P</li> <li>26-Sep-22</li> <li>07-Oct-22, Excavation to P</li> <li>26-Sep-22</li> <li>08-Oct-22</li> <li>14-Oct-22, Pile C</li> <li>08-Oct-22</li> <li>08-Oct-22</li> <li>14-Oct-22, Pile C</li> <li>08-Oct-22</li> <li>14-Oct-22, Pile C</li> <li>08-Oct-22</li> <li>14-Oct-22, Pile C</li> <li>08-Oct-22</li> <li>14-Oct-22, Pile C</li> <li>14-Oct-22, Pile C</li> <li>14-Oct-22, Pile C</li> <li>14-Oct-22, Pile C</li> <li>15-Sep-22</li> <li>15-Sep-22</li> <li>22-Oct-22</li> </ul>	Deises II Dits testelletings (047 au	40
24-Sep-22, Prebored H Pile Installations (41 H Pile Installations (48 nrs, 2 Groups @4d/no.) Group (3# 4#), Prebored H Pil 02-Oct-22 11-Oct-22 13-Sep-22 07-Oct-22, Excavation to P 26-Sep-22 08-Oct-22 (D), @60m/d 2 Groups), 01-Aug-22, 01-Aug-22, Driven H Pile Installations (24 Pile Installations (214 nrs ~40m(D), @60m/d 2 Groups), Driven H Pile Installations (24 Pile Installations (214 nrs ~40m(D), @60m/d 2 Groups), Driven H Pile Installat , Pile Load Test rs, 5set @1/7d), 10-Aug-22, 10-Aug-22, Pile Caps Construction (28 nrs, 5set @ truction (28 nrs, 5set @17d), 20-Aug-22, 20-Aug-22, Pile Caps Construction ( Excavation to Pile Cap Formation, 31-Aug-22, 31-Aug-22, Excavation to Pile C 13-Sep-22, Pile Cut-off & Capping Plate (375 nrs, 10nr/d) Pile Caps Construc 15-Oct-22, Excavation to Pile Caps Construction (28 nrs, 20-Cut-22,		4
24-Sep-22, Prebored H Pile Installations (41 H Pile Installations (48 nrs, 2 Groups @4d/no.) Group (3# 4#), Prebored H Pil 02-Oct-22 11-Oct-22 13-Sep-22 07-Oct-22, Excavation to P 26-Sep-22 08-Oct-22 (D), @60m/d 2 Groups), 01-Aug-22, 01-Aug-22, Driven H Pile Installations (24 Pile Installations (214 nrs ~40m(D), @60m/d 2 Groups), Driven H Pile Installations (24 Pile Installations (214 nrs ~40m(D), @60m/d 2 Groups), Driven H Pile Installat , Pile Load Test rs, 5set @1/7d), 10-Aug-22, 10-Aug-22, Pile Caps Construction (28 nrs, 5set @ truction (28 nrs, 5set @17d), 20-Aug-22, 20-Aug-22, Pile Caps Construction ( Excavation to Pile Cap Formation, 31-Aug-22, 31-Aug-22, Excavation to Pile C 13-Sep-22, Pile Cut-off & Capping Plate (375 nrs, 10nr/d) Pile Caps Construc 15-Oct-22, Excavation to Pile Caps Construction (28 nrs, 20-Cut-22,		
24-Sep-22, Prebored H Pile Installations (41 H Pile Installations (48 nrs, 2 Groups @4d/no.) Group (3# 4#), Prebored H Pil 02-Oct-22 11-Oct-22 13-Sep-22 07-Oct-22, Excavation to P 26-Sep-22 08-Oct-22 (D), @60m/d 2 Groups), 01-Aug-22, 01-Aug-22, Driven H Pile Installations (24 Pile Installations (214 nrs ~40m(D), @60m/d 2 Groups), Driven H Pile Installations (24 Pile Installations (214 nrs ~40m(D), @60m/d 2 Groups), Driven H Pile Installat , Pile Load Test rs, 5set @1/7d), 10-Aug-22, 10-Aug-22, Pile Caps Construction (28 nrs, 5set @ truction (28 nrs, 5set @17d), 20-Aug-22, 20-Aug-22, Pile Caps Construction ( Excavation to Pile Cap Formation, 31-Aug-22, 31-Aug-22, Excavation to Pile C 13-Sep-22, Pile Cut-off & Capping Plate (375 nrs, 10nr/d) Pile Caps Construc 15-Oct-22, Excavation to Pile Caps Construction (28 nrs, 20-Cut-22,		
24-Sep-22, Prebored H Pile Installations (41 H Pile Installations (48 nrs, 2 Groups @4d/no.) Group (3# 4#), Prebored H Pil 02-Oct-22 11-Oct-22 13-Sep-22 07-Oct-22, Excavation to P 26-Sep-22 08-Oct-22 (D), @60m/d 2 Groups), 01-Aug-22, 01-Aug-22, Driven H Pile Installations (24 Pile Installations (214 nrs ~40m(D), @60m/d 2 Groups), Driven H Pile Installations (24 Pile Installations (214 nrs ~40m(D), @60m/d 2 Groups), Driven H Pile Installat , Pile Load Test rs, 5set @1/7d), 10-Aug-22, 10-Aug-22, Pile Caps Construction (28 nrs, 5set @ truction (28 nrs, 5set @17d), 20-Aug-22, 20-Aug-22, Pile Caps Construction ( Excavation to Pile Cap Formation, 31-Aug-22, 31-Aug-22, Excavation to Pile C 13-Sep-22, Pile Cut-off & Capping Plate (375 nrs, 10nr/d) Pile Caps Construc 15-Oct-22, Excavation to Pile Caps Construction (28 nrs, 20-Cut-22,		
24-Sep-22, Prebored H Pile Installations (41 H Pile Installations (48 nrs, 2 Groups @4d/no.) Group (3# 4#), Prebored H Pil 02-Oct-22 11-Oct-22 13-Sep-22 07-Oct-22, Excavation to P 26-Sep-22 08-Oct-22 (D), @60m/d 2 Groups), 01-Aug-22, 01-Aug-22, Driven H Pile Installations (24 Pile Installations (214 nrs ~40m(D), @60m/d 2 Groups), Driven H Pile Installations (24 Pile Installations (214 nrs ~40m(D), @60m/d 2 Groups), Driven H Pile Installat , Pile Load Test rs, 5set @1/7d), 10-Aug-22, 10-Aug-22, Pile Caps Construction (28 nrs, 5set @ truction (28 nrs, 5set @17d), 20-Aug-22, 20-Aug-22, Pile Caps Construction ( Excavation to Pile Cap Formation, 31-Aug-22, 31-Aug-22, Excavation to Pile C 13-Sep-22, Pile Cut-off & Capping Plate (375 nrs, 10nr/d) Pile Caps Construc 15-Oct-22, Excavation to Pile Caps Construction (28 nrs, 20-Cut-22,		10 Oct 22 Probarad H Pi
02-Oct-22         11-Oct-22         13-Sep-22         07-Oct-22, Excavation to P         26-Sep-22         08-Oct-22         08-Oct-22         09-Oct-22, Excavation to P         26-Sep-22         08-Oct-22         09-Oct-22, Excavation to P         26-Sep-22         08-Oct-22         09-Oct-22, Pile C         08-Oct-22         09-Oct-22, Pile Caps Construction (28 nrs, 5set @         19-Det Pile Load Test         19-Det Cap Formation, 31-Aug-22, 20-Aug-22, Pile Caps Construction (28 nrs, 5set @         13-Sep-22, Pile Cut-off & Capping Plate (375 nrs, 10nr/d)         13-Sep-22, Pile Cut-off & Capping Plate (375 nrs, 10nr/d)         13-Sep-22         20-Oct-22, Excavation to Pile Caps Construct	24-Se	
02-Oct-22         11-Oct-22         13-Sep-22         07-Oct-22, Excavation to P         26-Sep-22         08-Oct-22         08-Oct-22         09-Oct-22, Excavation to P         26-Sep-22         08-Oct-22         09-Oct-22, Excavation to P         26-Sep-22         08-Oct-22         09-Oct-22, Pile C         08-Oct-22         09-Oct-22, Pile Caps Construction (28 nrs, 5set @         19-Det Pile Load Test         19-Det Cap Formation, 31-Aug-22, 20-Aug-22, Pile Caps Construction (28 nrs, 5set @         13-Sep-22, Pile Cut-off & Capping Plate (375 nrs, 10nr/d)         13-Sep-22, Pile Cut-off & Capping Plate (375 nrs, 10nr/d)         13-Sep-22         20-Oct-22, Excavation to Pile Caps Construct	H Pile Installations (48 nrs. 2 Groups (	autoria (3# 4#) Prehared H Pile I
11-Oct-22         13-Sep-22       07-Oct-22, Excavation to P         26-Sep-22       14-Oct-22, Pile C         08-Oct-22       08-Oct-22         (D), @60m/d 2 Groups), 01-Aug-22, 01-Aug-22, Driven H Pile Installations (24         Pile Installations (214 nrs ~40m(D), @60m/d 2 Groups), Driven H Pile Installations (24         Pile Load Test         rs, 5set @1/7d), 10-Aug-22, 10-Aug-22, Pile Caps Construction (28 nrs, 5set @         struction (28 nrs, 5set @1/7d), 20-Aug-22, 20-Aug-22, Pile Caps Construction (28 nrs, 5set @         13-Sep-22, Pile Cut-off & Capping Plate (375 nrs, 10nr/d)         13-Sep-22, Pile Cut-off & Capping Plate (375 nrs, 10nr/d)         13-Sep-22       15-Oct-22, Excavation to Pile Caps Construction (28 nrs, 20-Aug-22, 20-Aug-22-Aug-22, 20-Aug-22, 20-Aug-22, 20-Aug-22, 20-Aug-22, 20-Aug-22,		
11-Oct-22         13-Sep-22       07-Oct-22, Excavation to P         26-Sep-22       14-Oct-22, Pile C         08-Oct-22       08-Oct-22         (D), @60m/d 2 Groups), 01-Aug-22, 01-Aug-22, Driven H Pile Installations (24         Pile Installations (214 nrs ~40m(D), @60m/d 2 Groups), Driven H Pile Installations (24         Pile Load Test         rs, 5set @1/7d), 10-Aug-22, 10-Aug-22, Pile Caps Construction (28 nrs, 5set @         struction (28 nrs, 5set @1/7d), 20-Aug-22, 20-Aug-22, Pile Caps Construction (28 nrs, 5set @         13-Sep-22, Pile Cut-off & Capping Plate (375 nrs, 10nr/d)         13-Sep-22, Pile Cut-off & Capping Plate (375 nrs, 10nr/d)         13-Sep-22       15-Oct-22, Excavation to Pile Caps Construction (28 nrs, 20-Aug-22, 20-Aug-22-Aug-22, 20-Aug-22, 20-Aug-22, 20-Aug-22, 20-Aug-22, 20-Aug-22,		
11-Oct-22         13-Sep-22         07-Oct-22, Excavation to P         26-Sep-22         08-Oct-22         08-Oct-22         (D), @60m/d 2 Groups), 01-Aug-22, 01-Aug-22, Driven H Pile Installations (24         Pile Installations (214 nrs ~40m(D), @60m/d 2 Groups), Driven H Pile Installations (24         Pile Load Test         rs, 5set @1/7d), 10-Aug-22, 10-Aug-22, Pile Caps Construction (28 nrs, 5set @         struction (28 nrs, 5set @1/7d), 20-Aug-22, 20-Aug-22, Pile Caps Construction (28 nrs, 5set @         13-Sep-22, Pile Cut-off & Capping Plate (375 nrs, 10nr/d)         13-Sep-22, Pile Cut-off & Capping Plate (375 nrs, 10nr/d)         15-Oct-22, Exc         15-Sep-22         2		
11-Oct-22         13-Sep-22         07-Oct-22, Excavation to P         26-Sep-22         08-Oct-22         08-Oct-22         (D), @60m/d 2 Groups), 01-Aug-22, 01-Aug-22, Driven H Pile Installations (24         Pile Installations (214 nrs ~40m(D), @60m/d 2 Groups), Driven H Pile Installations (24         Pile Installations (214 nrs ~40m(D), @60m/d 2 Groups), Driven H Pile Installations (24         Pile Load Test         rs, 5set @1/7d), 10-Aug-22, 10-Aug-22, Pile Caps Construction (28 nrs, 5set @         struction (28 nrs, 5set @1/7d), 20-Aug-22, 20-Aug-22, Pile Caps Construction (28 nrs, 5set @         13-Sep-22, Pile Cut-off & Capping Plate (375 nrs, 10nr/d)         13-Sep-22, Pile Cut-off & Capping Plate (375 nrs, 10nr/d)         Pile Caps Construction (28 nrs, 22, 20-Aug-22, 21-Aug-22, Excavation to Pile Caps Construction (28 nrs, 20-Aug-22, 20		
13-Sep-22       07-Oct-22, Excavation to P         26-Sep-22       14-Oct-22, Pile C         08-Oct-22       08-Oct-22         (D), @60m/d 2 Groups), 01-Aug-22, 01-Aug-22, Driven H Pile Installations (24-         Pile Installations (214 nrs ~40m(D), @60m/d 2 Groups), Driven H Pile Installations (24-         Pile Installations (214 nrs ~40m(D), @60m/d 2 Groups), Driven H Pile Installations (24-         Pile Load Test         rs, 5set @1/7d), 10-Aug-22, 10-Aug-22, Pile Caps Construction (28 nrs, 5set @         struction (28 nrs, 5set @1/7d), 20-Aug-22, 20-Aug-22, Pile Caps Construction (28 nrs, 5set @         Excavation to Pile Cap Formation, 31-Aug-22, 31-Aug-22, Excavation to Pile Caps Construction (28 nrs, 10nr/d)         13-Sep-22, Pile Cut-off & Capping Plate (375 nrs, 10nr/d)         Pile Caps Construction (28 nrs, 22, 20-Aug-22, 20-Aug-22, 20-Aug-22, Excavation to Pile Caps Construction (28 nrs, 20-Aug-22, 20-Aug-22-Aug-22, 20-Aug-22, 20-Aug-22, 20-Aug-22, 20-Aug-22, 20-Aug-22,	02-Oct-22	4
26-Sep-22 14-Oct-22, Pile C 08-Oct-22 (D), @60m/d 2 Groups), 01-Aug-22, 01-Aug-22, Driven H Pile Installations (24 Pile Installations (214 nrs ~40m(D), @60m/d 2 Groups), Driven H Pile Installat Pile Load Test rs, 5set @1/7d), 10-Aug-22, 10-Aug-22, Pile Caps Construction (28 nrs, 5set @ struction (28 nrs, 5set @1/7d), 20-Aug-22, 20-Aug-22, Pile Caps Construction ( Excavation to Pile Cap Formation, 31-Aug-22, 31-Aug-22, Excavation to Pile C 13-Sep-22, Pile Cut-off & Capping Plate (375 nrs, 10nr/d) 13-Sep-22, Pile Cut-off & Capping Plate (375 nrs, 10nr/d) 15-Oct-22, Exc 15-Sep-22 200		
26-Sep-22 14-Oct-22, Pile C 08-Oct-22 (D), @60m/d 2 Groups), 01-Aug-22, 01-Aug-22, Driven H Pile Installations (24 Pile Installations (214 nrs ~40m(D), @60m/d 2 Groups), Driven H Pile Installat Pile Load Test rs, 5set @1/7d), 10-Aug-22, 10-Aug-22, Pile Caps Construction (28 nrs, 5set @ struction (28 nrs, 5set @1/7d), 20-Aug-22, 20-Aug-22, Pile Caps Construction ( Excavation to Pile Cap Formation, 31-Aug-22, 31-Aug-22, Excavation to Pile C 13-Sep-22, Pile Cut-off & Capping Plate (375 nrs, 10nr/d) Pile Caps Construc 15-Oct-22, Exc 15-Sep-22 22-Oc		07-Oct-22, Excavation to Pile
(D), @60m/d 2 Groups), 01-Aug-22, 01-Aug-22, Driven H Pile Installations (24 Pile Installations (214 nrs ~40m(D), @60m/d 2 Groups), Driven H Pile Installat 2, Pile Load Test rs, 5set @1/7d), 10-Aug-22, 10-Aug-22, Pile Caps Construction (28 nrs, 5set @ struction (28 nrs, 5set @1/7d), 20-Aug-22, 20-Aug-22, Pile Caps Construction ( Excavation to Pile Cap Formation, 31-Aug-22, 31-Aug-22, Excavation to Pile C 13-Sep-22, Pile Cut-off & Capping Plate (375 nrs, 10nr/d) 13-Sep-22, Pile Cut-off & Capping Plate (375 nrs, 10nr/d) 15-Oct-22, Excavation to Pile Caps Construct	26-Sep-22	14-Oct-22, Pile Cut
Pile Installations (214 nrs ~40m(D), @60m/d 2 Groups), Driven H Pile Installat Pile Load Test rs, 5set @1/7d), 10-Aug-22, 10-Aug-22, Pile Caps Construction (28 nrs, 5set @ struction (28 nrs, 5set @1/7d), 20-Aug-22, 20-Aug-22, Pile Caps Construction ( Excavation to Pile Cap Formation, 31-Aug-22, 31-Aug-22, Excavation to Pile Cap 13-Sep-22, Pile Cut-off & Capping Plate (375 nrs, 10nr/d) Pile Caps Construction 15-Oct-22, Excavation 15-Sep-22 22-Oct	U	8-001-22
Pile Installations (214 nrs ~40m(D), @60m/d 2 Groups), Driven H Pile Installat Pile Load Test rs, 5set @1/7d), 10-Aug-22, 10-Aug-22, Pile Caps Construction (28 nrs, 5set @ struction (28 nrs, 5set @1/7d), 20-Aug-22, 20-Aug-22, Pile Caps Construction ( Excavation to Pile Cap Formation, 31-Aug-22, 31-Aug-22, Excavation to Pile Cap 13-Sep-22, Pile Cut-off & Capping Plate (375 nrs, 10nr/d) Pile Caps Construction 15-Oct-22, Excavation 15-Sep-22 22-Oct		
Pile Installations (214 nrs ~40m(D), @60m/d 2 Groups), Driven H Pile Installat 2, Pile Load Test rs, 5set @1/7d), 10-Aug-22, 10-Aug-22, Pile Caps Construction (28 nrs, 5set @ struction (28 nrs, 5set @1/7d), 20-Aug-22, 20-Aug-22, Pile Caps Construction ( Excavation to Pile Cap Formation, 31-Aug-22, 31-Aug-22, Excavation to Pile Caps Construction 13-Sep-22, Pile Cut-off & Capping Plate (375 nrs, 10nr/d) Pile Caps Construc 15-Oct-22, Exc 15-Sep-22		
2, Pile Load Test rs, 5set @1/7d), 10-Aug-22, 10-Aug-22, Pile Caps Construction (28 nrs, 5set @ struction (28 nrs, 5set @1/7d), 20-Aug-22, 20-Aug-22, Pile Caps Construction ( Excavation to Pile Cap Formation, 31-Aug-22, 31-Aug-22, Excavation to Pile C 13-Sep-22, Pile Cut-off & Capping Plate (375 nrs, 10nr/d) Pile Caps Construc 15-Oct-22, Exc 15-Sep-22 22-00	(D), @60m/d 2 Groups), 01-Aug-22, 01-	Aug-22, Driven H Pile Installations (244 n
2, Pile Load Test rs, 5set @1/7d), 10-Aug-22, 10-Aug-22, Pile Caps Construction (28 nrs, 5set @ struction (28 nrs, 5set @1/7d), 20-Aug-22, 20-Aug-22, Pile Caps Construction ( Excavation to Pile Cap Formation, 31-Aug-22, 31-Aug-22, Excavation to Pile C 13-Sep-22, Pile Cut-off & Capping Plate (375 nrs, 10nr/d) Pile Caps Construc 15-Oct-22, Exc 15-Sep-22 22-00	Dila lastallations (044 and 140m (D) 00	
struction (28 nrs, 5set @1/7d), 20-Aug-22, 20-Aug-22, Pile Caps Construction ( Excavation to Pile Cap Formation, 31-Aug-22, 31-Aug-22, Excavation to Pile C 13-Sep-22, Pile Cut-off & Capping Plate (375 nrs, 10nr/d) Pile Caps Construc 15-Oct-22, Exc 15-Sep-22 22-Oc		60m/d 2 Groups), Driven H Pile Installation
struction (28 nrs, 5set @1/7d), 20-Aug-22, 20-Aug-22, Pile Caps Construction ( Excavation to Pile Cap Formation, 31-Aug-22, 31-Aug-22, Excavation to Pile C 13-Sep-22, Pile Cut-off & Capping Plate (375 nrs, 10nr/d) Pile Caps Construc 15-Oct-22, Exc 15-Sep-22		
Excavation to Pile Cap Formation, 31-Aug-22, 31-Aug-22, Excavation to Pile C 13-Sep-22, Pile Cut-off & Capping Plate (375 nrs, 10nr/d) Pile Caps Construc 15-Oct-22, Exc 15-Sep-22 22-Oc		
13-Sep-22, Pile Cut-off & Capping Plate (375 nrs, 10nr/d)           Pile Caps Construct           15-Oct-22, Exc           15-Sep-22           2	rs, 5set @1/7d), 10-Aug-22, 10-Aug-22,	
Pile Caps Construct 15-Oct-22, Exc 15-Sep-22 22-Oc 2	rs, 5set @1/7d), 10-Aug-22, 10-Aug-22,	
15-Oct-22, Exc 15-Sep-22 22-Oc 2	rs, 5set @1/7d), 10-Aug-22, 10-Aug-22, struction (28 nrs, 5set @1/7d), 20-Aug-2 Excavation to Pile Cap Formation, 31-A	2, 20-Aug-22, Pile Caps Construction (28 ug-22, 31-Aug-22, Excavation to Pile Cap
15-Sep-22 22-Oc	rs, 5set @1/7d), 10-Aug-22, 10-Aug-22, struction (28 nrs, 5set @1/7d), 20-Aug-2 Excavation to Pile Cap Formation, 31-A 13-Sep-22, Pile Cut-c	2, 20-Aug-22, Pile Caps Construction (28 ) ug-22, 31-Aug-22, Excavation to Pile Cap ff & Capping Plate (375 nrs, 10nr/d)
2	rs, 5set @1/7d), 10-Aug-22, 10-Aug-22, struction (28 nrs, 5set @1/7d), 20-Aug-2 Excavation to Pile Cap Formation, 31-A 13-Sep-22, Pile Cut-c	2, 20-Aug-22, Pile Caps Construction (28 ug-22, 31-Aug-22, Excavation to Pile Cap ff & Capping Plate (375 nrs, 10nr/d) Pile Caps Constructio
Base Slab for TPU (Module 1), 21-Sep-22, 21-Se	rs, 5set @1/7d), 10-Aug-22, 10-Aug-22, struction (28 nrs, 5set @1/7d), 20-Aug-2 Excavation to Pile Cap Formation, 31-A 13-Sep-22, Pile Cut-c	2, 20-Aug-22, Pile Caps Construction (28 ) ug-22, 31-Aug-22, Excavation to Pile Cap ff & Capping Plate (375 nrs, 10nr/d)
	rs, 5set @1/7d), 10-Aug-22, 10-Aug-22, struction (28 nrs, 5set @1/7d), 20-Aug-2 Excavation to Pile Cap Formation, 31-A 13-Sep-22, Pile Cut-c 15-Sep-22	2, 20-Aug-22, Pile Caps Construction (28 ug-22, 31-Aug-22, Excavation to Pile Cap ff & Capping Plate (375 nrs, 10nr/d) Pile Caps Constructio 15-Oct-22, Excava
	rs, 5set @1/7d), 10-Aug-22, 10-Aug-22, struction (28 nrs, 5set @1/7d), 20-Aug-2 Excavation to Pile Cap Formation, 31-A 13-Sep-22, Pile Cut-c 15-Sep-22	2, 20-Aug-22, Pile Caps Construction (28 ug-22, 31-Aug-22, Excavation to Pile Cap ff & Capping Plate (375 nrs, 10nr/d) Pile Caps Constructio 15-Oct-22, Excava 22-Oct-2
	rs, 5set @1/7d), 10-Aug-22, 10-Aug-22, struction (28 nrs, 5set @1/7d), 20-Aug-2 Excavation to Pile Cap Formation, 31-A 13-Sep-22, Pile Cut-c 15-Sep-22	2, 20-Aug-22, Pile Caps Construction (28 ug-22, 31-Aug-22, Excavation to Pile Cap ff & Capping Plate (375 nrs, 10nr/d) Pile Caps Constructio 15-Oct-22, Excava 22-Oct-2

)	Activity Name	Original Duration	Remaining Duration	Activity % Current Start Complete	Current Finish	Late Start	Late Finish	Total Float M56 Remarks		Jul	ated Waste Manageme
10-1580-1(6D)	Base Slab for FGC (Module 1)	60	30	50% 02-Jun-22 A	22-Sep-22	04-Aug-22	02-Sep-22	-20		56	57
10-1590	Base Slab Stage 2 (Module 2)	50	50	0% 13-Oct-22	01-Dec-22	30-Sep-22	18-Nov-22	-13			
Turbine Hall Bld Found		194	133	31-May-22	10-Dec-22	20-Jul-22	29-Nov-22	-11			
Piling Works (Driven H-pil 09-1730	le) Driven H Pile Installations (57 nrs ~55m (D), @60m/d 2 Groups)	98 33			21-Aug-22	20-Jul-22 24-Aug-22		26 25 20/57 com	npleted		21-Aug-
09-1730-1(M55)	Driven H Pile Installations (118 nrs ~55m(D), @60m/d 2 Groups)	68	63	7.35% 31-May-22	01-Oct-22	20-Jul-22	20-Sep-22	-11 10/118 co			
09-1740	Pile Load Test	8	8	0% 21-Aug-22	29-Aug-22	20-Oct-22	27-Oct-22	60			21-Aug-22
Pile Caps Construction 09-1750	Excavation to Pile Cap Formation	70 28	70 28	02-Oct-22 0% 02-Oct-22	10-Dec-22 29-Oct-22	21-Sep-22 21-Sep-22	_	-11 -11			
09-1760	Pile Cut-off & Capping Plate (219 nrs, @10nr/d)	21	21	0% 11-Oct-22	31-Oct-22	27-Oct-22	16-Nov-22	16			
09-1770	Pile Caps Construction for Module 1 to 3 & Raft Foundation Construction 1	55	55	0% 17-Oct-22	10-Dec-22	06-Oct-22	29-Nov-22	-11			
Compressor & CCCW E		104 32	105 33	07-Jul-22 A 07-Jul-22 A	12-Nov-22	15-Jul-22 15-Jul-22	27-Oct-22 22-Sep-22	-16 21			
Pling works (Driven ri-pling) 09-2320	Driven H Pile Installations (68 nrs ~55m (D), @60m/d 2 Groups)	32		21.88% 07-Jul-22 A		15-Jul-22	08-Aug-22	-16 30/68 inpr	rogress -22 A		Dri
09-2330	Pile Load Test	8	8	0% 25-Aug-22	01-Sep-22	15-Sep-22	· ·	21			25-Aug-22 🗔
Pile Caps Construction 09-2340	Excavation to Pile Cap Formation	<mark>80</mark> 45		25-Aug-22 0% 25-Aug-22	12-Nov-22 08-Oct-22		27-Oct-22 22-Sep-22	-16 -16			25-Aug-22
09-2350	Pile Cut-off & Capping Plate (68 nrs, @10nr/d)	43	43	0% 23-Aug-22	15-Oct-22		22-Sep-22 29-Sep-22	-16			25-Aug-22
09-2350-1(6)	Pile Caps Construction (9 nrs, @0.2nr/d)	45	45	0% 29-Sep-22	12-Nov-22	· ·	27-Oct-22	-16			
Chimney Foundation		193	82	18-Mar-22 A			01-Nov-22	2			
Piling Works (Bored Pile) 09-1820	Bored Pile Set #1 (6 nrs, @22d/no.)	193 136	82 45	18-Mar-22 A 67% 18-Mar-22 A			01-Nov-22 25-Sep-22	2			
09-1820	Pile Core Test	32	45 32	0% 23-Sep-22	25-Sep-22 25-Oct-22	-	31-Oct-22	6			
09-1830-1	Bored Pile Set #2 (5 nrs, @22d/no.)	121	48	60% 20-Apr-22 A		· · ·	28-Sep-22	2			
09-1830-2	Pile Core Test	32	32	0% 27-Sep-22	29-Oct-22	29-Sep-22		2			
09-1830-3	Trim Pile Head	25 75	25 75	0% 06-Oct-22 21-Aug-22	31-Oct-22	08-Oct-22	01-Nov-22 28-Nov-22	2			
IWMF Substation Build Piling Works (Driven H-pi		75					28-Nov-22	25			
09-1970(6)	Predrilling for Driven Pile founding determination (15nr ~60m, @15m/d, 4	15		0% 21-Aug-22	05-Sep-22	-	29-Sep-22	25			21-Aug-22
09-1980	Driven H Pile Installations (120 nrs ~60m(D), @60m/d 2 Groups)	60	60	0% 05-Sep-22	04-Nov-22	30-Sep-22		25			
Pipe Bridge Foundation	n	39 39	39 39	25-Aug-22 25-Aug-22	02-Oct-22 02-Oct-22		27-Oct-22 27-Oct-22	25 25			
Pipe Bridge B Piling Works Piling Work	ss ( Driven H-pile)	39			02-Oct-22 02-Oct-22		27-Oct-22 27-Oct-22	25			
09-2450	Driven H Pile Installations (33 nrs ~55m (D), @60m/d 1 Group)	31	31	0% 25-Aug-22	24-Sep-22	19-Sep-22	19-Oct-22	25			25-Aug-22 🗖
09-2460	Pile Load Test	8	8	0% 25-Sep-22	02-Oct-22	20-Oct-22	27-Oct-22	25			
Pipe Bridge C Piling Works Piling Work	(s ( Driven H-nile)	27 27	27 27	25-Aug-22 25-Aug-22	20-Sep-22 20-Sep-22	01-Oct-22 01-Oct-22	27-Oct-22 27-Oct-22	<u>37</u> 37			
09-2500	Driven H Pile Installations (20 nrs ~55m (D), @60m/d 1 Group)	19		0% 25-Aug-22		01-Oct-22	19-Oct-22	37			25-Aug-22
09-2510	Pile Load Test	8	8	0% 13-Sep-22	20-Sep-22	20-Oct-22	27-Oct-22	37			
Heavy Load Access Construction		30 30		13-Nov-22	12-Dec-22 12-Dec-22	28-Oct-22	26-Nov-22 26-Nov-22	-16 -16			
09-3000(6D)	500mm Sub Base & Road Base	30		0% 13-Nov-22		28-Oct-22 28-Oct-22	26-Nov-22 26-Nov-22	-16			
Superstructural Worl	ks	60	60	30-Sep-22	28-Nov-22	10-Sep-22	11-Nov-22	-17			
Process Buildings - Bo	oiler & Flue Gas Treatment Bld Structure	60	60	30-Sep-22	28-Nov-22	10-Sep-22	11-Nov-22	-17			
Steel Structure		60			28-Nov-22	-	11-Nov-22	-17			
Boiler Building Steel Strues Steel Structure Erection		60 60	60 60	30-Sep-22 30-Sep-22	28-Nov-22 28-Nov-22		11-Nov-22 11-Nov-22	-17 -17			
10-1610	Erection of Mega Columns (4nos @30d /column /gang x 2)	60	60	0% 30-Sep-22	28-Nov-22		08-Nov-22	-20			
10-1620	Steel Roof Truss Ground Assembly Works	60	60	0% 30-Sep-22	28-Nov-22		11-Nov-22	-17			
	Road and Drains Works	180	142	28-Apr-22 A			06-Sep-23	261			
Drainage Works 14-1000-1(M55)	Sewage Transfer System for IW MF Vessels (Caisson 13)	105 60	105 60	06-Sep-22 0% 03-Oct-22	19-Dec-22		21-Dec-22 01-Dec-22	2 0			
Box Culvert		105		06-Sep-22			21-Dec-22	2			
_East Culvert (3.5m x 2.5n		105	105	06-Sep-22		08-Sep-22	21-Dec-22	2			
14-2000	Excavation to Formation	60		0% 06-Sep-22			06-Nov-22	2			
14-2010 14-2020	Construction of Box Culvert (118m, 1.7m/d) Backfill, Compaction & Testing	70 60	70 60	0% 27-Sep-22 0% 21-Oct-22	05-Dec-22 19-Dec-22	29-Sep-22 23-Oct-22	07-Dec-22 21-Dec-22	2			
Earthing System		180	140	28-Apr-22 A		20-Apr-23	06-Sep-23	263			
16-1900-2(6)	Installation of Ground Earthing Mesh	180	140	22.22% 28-Apr-22 A	17-Dec-22	20-Apr-23	06-Sep-23	263			
Vorks By CLP		388	388	30-Sep-23	23-Oct-24	30-Sep-23	31-Oct-24	9			
Installation of Transmi		203	203	30-Sep-23	20-Apr-24	30-Sep-23	12-Jun-24	53			
15-0800 15-0900	450 days Prior to Commencement of System Commissioning Test Completion of Civil Provision for Transmission	0	0	0% 09-Dec-23	30-Sep-23	01-Oct-23	30-Sep-23	-69			
15-1000	Construction of Transmission System	90	90	0% 01-Oct-23	29-Dec-23	14-Feb-24	13-May-24	136			
15-1002	Cable Testing	30	30	0% 22-Mar-24	20-Apr-24		12-Jun-24	53			
Remaining Installation		180	180	23-Dec-23	19-Jun-24	01-Jan-24	17-Sep-24	90			
15-1005	Handover of CLP Equipment Room no later than 10 mths before energizat	0	0	0% 23-Dec-23		01-Jan-24		9			
Ionth Rollir	ng Programme (July 2022)							Rema	ining Work I Work I Remaining Work	<ul> <li>Actual Mile</li> <li>Critical Mile</li> </ul>	

ct No. EP/SP/66/12	
3 INU EE/3E/00/12	
	環境保護署 Environmental Protection Department
Facilities, Phase 1	
2	
Sep 58	Oct 59
	ab for FGC (Module 1), 22-Sep-22, 22-Sep-
	13-Oct-22
Driven H Pile Installations (57 prs ~55m)	D), @60m/d 2 Groups), Driven H Pile Install
	Driven H Pile Installations (118 nrs ~55
9-Aug-22, Pile Load Test	
5-Aug-22, File Load lest	
02-Oct-2	
02-001-2	
	11-Oct-22
	17-Oct-22
	0m/d 2 Groups), 24-Aug-22, 24-Aug-22, Dri
01-Sep-22, Pile Load Test	
02-Oct-2	08-Oct-22, Excavation to Pile
	2 15-Oct-22, Pile Cut
29-Sep-22	
	o-22, Bored Pile Set #1 (6 nrs, @22d/no.), B
23-Sep-22	25-Od
2	7 Sep-22, Bored Pile Set #2 (5 nrs, @22d/n
27-Sep-22 🔲	
-06	Oct-22
	1
05-Sep-22, Predrilling for Drive	n Pile founding determination (15nr ~60m, @
p-22	· · · · · · · · · · · · · · · · · · ·
24-S	ep-22, Driven H Pile Installations (33 nrs ~5
25-Sep-22	02-Oct-22, Pile Load Test
	-
12-Sep-22, Driven H I	Pile Installations (20 nrs ~55m(D), @60m/d
	2ìle Installations (20 nrs ∼55m(D), @60m/d . Pile Load Test
	Pile Installations (20 nrs ~55m(D), @60m/d , Pile Load Test
13-Sep-22 20-Sep-22	
13-Sep-22 20-Sep-22 30-Sep-22	
13-Sep-22 20-Sep-22	
13-Sep-22 20-Sep-22 30-Sep-22	
13-Sep-22 20-Sep-22 30-Sep-22 30-Sep-22 30-Sep-22	Pile Load Test
13-Sep-22 20-Sep-22 30-Sep-22	Pile Load Test
13-Sep-22 20-Sep-22 30-Sep-22 30-Sep-22 30-Sep-22	Pile Load Test
13-Sep-22 20-Sep-22 30-Sep-22 30-Sep-22 30-Sep-22 03-Oct-	Pile Load Test

	Seghers - 一板筆雕使会可 zanz interent vizing int	_								Integra	Cor nted Waste Managerr	ntract nent F
Activity ID	Activity Name	Original Duration	Remaining Duration	Activity % Complete	Current Start	Current Finish	Late Start	Late Finish	Total Float M56 Remarks	1.d	A	2022
		Duration	Duration	Comprete						56	Aug 57	
isotropy = 15-1010	Commencement of 132kV cable termination no later than 4 mths before e	0	0	0%	21-Apr-24	1	12-Jun-24		53			
15-1010-1(6)	Overall testing and commissioning of 2 x CHS-IW MF circuits	60	60	0%	21-Apr-24	19-Jun-24	20-Jul-24	17-Sep-24	90			
📕 Metering & En	ergization	125	125		20-Jun-24	23-Oct-24	18-Sep-24	31-Oct-24	9			
15-1020	Incoming Power System Final Inspection and Metering works	30	30	0%	20-Jun-24	19-Jul-24	02-Oct-24	31-Oct-24	104			
<b>=</b> 15-1030	Energization of Incoming Power Supply Main System	0	0	0%	23-Oct-24*		31-Oct-24		9			
15-1040	Energization of Incoming Power Supply Sub System	0	0	0%	23-Oct-24*		31-Oct-24		9			
15-1050	Export Power System Final Inspection and Metering works	30	30	0%	20-Jun-24	19-Jul-24	18-Sep-24	17-Oct-24	90			
15-1060	Connection to Grid	0	0	0%		19-Jul-24		31-Oct-24	104			



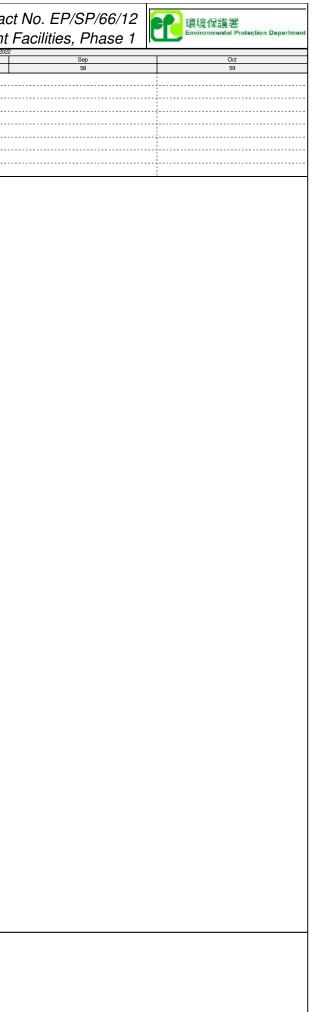

# Appendix B Summary of Implementation Status of Environmental Mitigation

# Appendix B

Table B.1	Implementation Schedule for Air Quality Measures for the IWMF at the artificial island near SKC
	implementation concare for an each of the internet at the attinetar learner of the

				Imple	ementat	tion S	tages*	Relevant	Implementation
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Des	С	0	Dec	Legislation and Guidelines	Status and Remarks	
S3b.8.1	<ul> <li><u>Air Pollution Control (Construction Dust)</u> <u>Regulation &amp; Good Site Practices</u></li> <li>Use of regular watering, with complete coverage, to reduce dust emissions from exposed site surfaces and unpaved roads, particularly during dry weather.</li> <li>Use of frequent watering for particularly dusty construction areas and areas close to ASRs.</li> <li>Side enclosure and covering of any aggregate or dusty material storage piles to reduce emissions. Where this is not practicable owing to frequent usage, watering shall be applied to aggregate fines.</li> <li>Open stockpiles shall be avoided or covered. Where possible, prevent placing dusty material storage piles near ASRs.</li> <li>Tarpaulin covering of all dusty vehicle loads transported to, from and between site locations.</li> <li>Establishment and use of vehicle wheel and body washing facilities at the exit points of the site.</li> <li>Provision of wind shield and dust extraction units or similar dust mitigation measures at the loading</li> </ul>	Work site / During the construction period	Contractor		✓			Control (Construction	Deficiency of Mitigation Measures but rectified by the Contractor. N/A for dust control measures for transportation outside site boundary.

Keppel Seghers – Zhen Hua Joint Venture

				Imple	ementa	ation S	stages*	Relevant	Implementation Status and Remarks
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	
	<ul> <li>points, and use of water sprinklers at the loading area where dust generation is likely during the loading process of loose material, particularly in dry seasons/ periods.</li> <li>Imposition of speed controls for vehicles on unpaved site roads. Ten kilometers per hour is the recommended limit.</li> <li>Where possible, routing of vehicles and positioning of construction plant should be at the maximum possible distance from ASRs</li> <li>Instigation of an environmental monitoring and auditing program to monitor the construction process in order to enforce controls and modify method of work if dusty conditions arise.</li> </ul>								
S3b.6.3	<ul> <li>Odour Removal by Deodorizers</li> <li>Deodorizers with 95% odour removal efficiency would be installed for the air ventilated from the mechanical treatment plant before discharge to the atmosphere</li> </ul>	Waste reception halls, the waste storage area, the mechanical treatment plant / During design & operation phase	IWMF Operator	~		✓		EIAO-TM	N/A
S3b.8.2	Air Pollution Control and Stack Monitoring	IWMF stack emissions / During	IWMF Operator	✓		~		EIAO-TM, Supporting Document for	N/A

Keppel Seghers – Zhen Hua Joint Venture

	Environmental Protection	Location /		Imple	ementa	tion S	tages*	Relevant	Implementation Status and Remarks
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	
	<ul> <li>Air pollution control and stack monitoring system will be installed for the IWMF to ensure that the emissions from the IWMF stack will meet the proposed target emission limits.</li> <li>Voluntary Enhancement Measures in Flue Gas Cleaning and Emission Monitoring: <ol> <li>Two-stage bag filter system with reagent recirculation;</li> <li>In addition to SCR, provide SNCR for removal of NOx; tighten emission limit for halfhourly and daily NOx to 160 mg/m<sup>3</sup> and 80 mg/m<sub>3</sub> respectively;</li> <li>Well-mixed feed waste: to minimize the fluctuation of pollutant loading on the flue gas treatment system;</li> <li>Two more AQMSs would be set up at South Lantau and Shek Kwu Chau respectively;</li> <li>Limit levels will be set under the IWMF DBO contract to require that waste feed shall cease if any of the air pollutant has exceeded 95% of the emission concentration limit as stipulated</li> </ol> </li> </ul>	design & operation phase						Guidelines Application for Variation of Environmental Permit (EP- 429/2012)	

	Environmental Protection	Leastion (		Imple	ementa	ation S	tages*	Relevant	Implementation Status and Remarks
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	ο	Dec	Legislation and Guidelines	
	<ol> <li>Each incineration chamber shall be fitted with auxiliary burners to ensure complete burn out of the combustion gases.</li> </ol>								
-		IWMF stack emissions / During design & operation phase	IWMF Operator					Supporting Document for Application for Variation of Environmental Permit (EP- 429/2012)	N/A

	Environmental Bratestian			Imple	ementa	ation S	stages*	Relevant	Implementation Status and Remarks
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	
	of the Environmental Permit. The								
	Contractor shall take two samples								
	from each shipload for testing and								
	the Contractor shall not dispose of								
	any of that shipload of treated fly ash								
	and air pollution control residues until								
	the test results confirm that the two								
	samples conform to the limits and the								
	criteria. If a test result confirms that								
	any one of the two samples does not								
	conform to the limits and the criteria,								
	the Contractor shall be required to								
	sample and test every shipload of								
	treated fly ash and air pollution								
	control residues for conformance to								
	the Incineration Residue Pollution								
	Control Limits and leachability								
	criteria for the next six months. The								
	Contractor shall make due allowance								
	in the Design and the Operation for								
	the time to sample and test treated fly								
	ash and air pollution control residues								
	before disposal.								
	<ul> <li>Provided that there is no non-</li> </ul>								
	conformance to the Incineration								
	Residue Pollution Control Limits and								
	leachability criteria shown in Table 2								
	of the Environmental Permit								
	throughout a continuous sixmonth								
	period in the Operation Period, the								
	testing frequency shall be reduced to								
	monthly interval. Two samples from								
	one shipload of treated fly ash and air								

	Environmental Protection			Imple	ementa	ation S	tages*	Relevant	Implementation Status and Remarks
EIA Ref	Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	
	pollution control residues shall be collected and tested for conformance to the Incineration Residue Pollution Control Limits and leachability criteria. The Contractor shall not dispose of any of the treated fly ash and air pollution control residues in the shipload which the samples are taken until the test results confirm that the samples conform to the limits and the criteria. If the test result confirm that any one of the samples does not conform to the limits and the criteria, the Contractor shall be required to sample and test every shipload of treated fly ash and air pollution control residues for conformance to the Incineration Residue Pollution Control Limits and leachability criteria shown in Table 2 of the Environmental Permit for the next six months.								
-	<ul> <li>Bottom Ash:</li> <li>During testing and commissioning, the Contractor shall sample and test every container of bottom ash for conformance to the leachability criteria shown in Table 2 of the Environmental Permit. If a test result confirms that any one of the samples does not conform to the criteria, the Contractor shall be required to sample and test every</li> </ul>	IWMF stack emissions / During design & operation phase	IWMF Operator	~		~		Supporting Document for Application for Variation of Environmental Permit (EP- 429/2012)	N/A

Keppel Seghers – Zhen Hua Joint Venture

				Imple	ementa	ation S	tages*	Relevant	Implementation Status and Remarks
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	
	container of bottom ash for								
	conformance to the leachability								
	criteria for the next six months.								
	• During the first six months of								
	operation, if the requirements in (d)								
	could be fully conformed with, the								
	Contractor shall sample and test								
	one shipload of bottom ash each								
	month for conformance to the leachability criteria shown in Table 2								
	of the Environmental Permit. The								
	Contractor shall take two samples								
	from the shipload for testing and the								
	Contractor shall not dispose of any								
	of that shipload of bottom ash until								
	the test results confirm that the two								
	samples conform to the criteria. If a								
	test result confirms that any one of								
	the two samples does not conform								
	to the criteria, the Contractor shall								
	be required to sample and test each								
	shipload of bottom ash for								
	conformance to the leachability								
	criteria for the next six months. The								
	Contractor shall make due								
	allowance in the Design and the								
	Operation for the time to sample and								
	test bottom ash before disposal.								
	<ul> <li>Provided that there is no non- conformance to the leasthability</li> </ul>								
	conformance to the leachability								
	criteria shown in Table 2 of the Environmental Permit throughout a								
	continuous six month period in the								

Keppel Seghers – Zhen Hua Joint Venture

	Environmental Protection			Imple	ementa	ation S	tages*	Relevant	Implementation Status and Remarks
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation D Agent	Des	С	0	Dec	Legislation and Guidelines	
	Operation Period, the Contractor shall be allowed to take two samples from any one shipload of bottom ash once every six months for conformance to the leachability criteria. The Contractor shall not dispose of any of the bottom ash in the shipload which the samples are taken until the test results confirm that the samples conform to the criteria. If the test result confirm that any one of the samples does not conform to the criteria, the Contractor shall be required to sample and test one shipload of bottom ash each month for conformance to the leachability criteria shown in Table 2 of the Environmental Permit for the next six months as stipulated above.								

\* Des - Design, C - Construction, O – Operation, and Dec - Decommissioning

#### Table B.2 Implementation Schedule for Noise Impact Measures for the IWMF at the artificial island near SKC

	Environmental Protection				Imple	ementa	ation S	tages*	Relevant	
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent		Des	С	0	Dec	Legislation and Guidelines	Implementation Status and Remarks
S4b.8	Good site practices to limit noise emissions a source and use of quiet plant and working methods, whenever practicable.		EPD and contractors	its		~			EIAO-TM	Implemented
S4b.6 & S4b.8	<ul> <li>All the ventilation fans installed in the below will be provided with silencers or acoustics treatment.</li> <li>(i) Stack of the incinerator</li> <li>(ii) Ventilation systems within the IWMF Enclosure and discharge silencer or other acoustic treatment equipment should be installed in the air-cooled chillers</li> <li>Other than provision of silencer or other acoustic treatment equipment for the stack of the incinerator and ventilation system, the detailed design should incorporate the following good practice in order to minimize the nuisance on the neighboring NSRs.</li> <li>(i) The exhaust of the ventilation system and any opening of the building should be located facing away from any NSRs; and</li> <li>(ii) Louver or other acoustic treatment equipment to the any opening of the applied to the</li> </ul>	Within IWMF area / Construction Period	EPD and contractors	its					EIAO-TM	N/A

Keppel Seghers – Zhen Hua Joint Venture

				Imple	ementa	ation S	tages*	Relevant	
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	Implementation Status and Remarks
-	<ul> <li><u>Voluntary Enhancement Measure</u></li> <li>Provision of air-conditioner and double glazed windows to nearby NSR at Shek Kwu Chau (i.e. SARDA) as precautionary measures.</li> </ul>	IWMF site	Design team, contractor, IWMF operator	•	~			Supporting Document for Application for Variation of Environmental Permit (EP- 429/2012)	Implemented

\* Des - Design, C - Construction, O – Operation, and Dec - Decommissioning

#### Table B.3 Implementation Schedule for Water Quality Measures for the Artificial Island near SKC

	Environmental Protection		-	Imple	ementa	ation S	tages*	Relevant	
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	Implementation Status and Remarks
S5b.8.1.1			Contractor					Guidelines EIAO-TM; ProPECC PN 1/94; WPCO	Implemented

				Imple	ement	ation S	stages*	Relevant	Implementation Status and Remarks
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	
	design of efficient silt removal facilities should be based on the guidelines in Appendix A1 of ProPECC PN 1/94, which states that the retention time for silt/sand traps should be 5 minutes under maximum flow conditions. The detailed design of the sand/silt traps shall be undertaken by the contractor prior to the commencement of construction.								
	<ul> <li>Water pumped out from foundation piles must be discharged into silt removal facilities.</li> </ul>								
	<ul> <li>Measures should be taken to minimize the ingress of site runoff and drainage into excavations. Drainage water pumped out from excavations should be discharged into storm drains via silt removal facilities.</li> </ul>								
	<ul> <li>During rainstorms, exposed slope/soil surfaces should be covered by a tarpaulin or other means, as far as practicable. Other measures that need to be implemented before, during and after rainstorms are summarized in ProPECC PN 1/94.</li> </ul>								
	<ul> <li>Exposed soil areas should be minimized to reduce potential for increased siltation and contamination of runoff.</li> </ul>								

				Impl	ementa	ation S	tages*	Relevant	Implementation Status and Remarks
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	ο	Dec	Legislation and Guidelines	
	• Earthwork final surfaces should be well compacted and subsequent permanent work or surface protection should be immediately performed.								
	Open stockpiles of construction materials or construction wastes on-site should be covered with tarpaulin or similar fabric during rainstorms.								
S5b.8.1.2	General Construction Activities Construction solid waste should be collected, handled and disposed of properly to avoid entering to the nearby watercourses and public drainage system. Rubbish and litter from construction sites should also be collected to prevent spreading of rubbish and litter from the site area.	Work site / During the construction period	Contractor		~			EIAO-TM; ProPECC PN 1/94; WPCO	Implemented
	It is recommended to clean the construction sites on a regular basis.								

Keppel Seghers – Zhen Hua Joint Venture

				Imple	ementa	ation S	tages*	Relevant	Implementation Status and Remarks
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	
S5b.8.1.3	There is a need to apply to EPD for a discharge license for discharge of effluent from the construction site under the WPCO. The discharge quality must meet the requirements specified in the discharge license. All the run-off and wastewater generated from the works areas should be treated so that it satisfies all the standards listed in the TM-DSS. The beneficial uses of the treated effluent for other on-site activities such as dust suppression and general cleaning etc., can minimize water consumption and reduce the effluent discharge volume. If monitoring of the treated effluent quality from the works areas is required during the construction phase of the Project, the monitoring should be carried out in accordance with the relevant WPCO license which is under the ambit of regional office of EPD.	During the construction	Contractor		<b>~</b>			EIAO-TM; ProPECC PN 1/94; WPCO	Discharge License was issued on 15/02/2022
S5b.8.1.4	<u>Accidental Spillage</u> Contractor must register as a chemical waste producer if chemical wastes would be produced from construction activities. The Waste Disposal Ordinance (Cap 354) and its subsidiary regulations in particular the Waste Disposal (Chemical Waste) (General) Regulation should be observed and complied with for control of chemical wastes.	Work site / During the construction period	Contractor		✓			EIAO-TM; ProPECC PN 1/94; WPCO; WDO	Deficiency of Mitigation Measures but rectified by the Contractor
S5b.8.1.5		During the construction	Contractor		•			EIAO-TM; ProPECC PN 1/94; WPCO; WDO	Implemented

Keppel Seghers – Zhen Hua Joint Venture

				Impl	ementa	ation St	tages*	Relevant	Implementation Status and Remarks
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	
	appropriately equipped to control these discharges.								
S5b.8.1.6	Oils and fuels should only be used and stored in designated areas which have pollution prevention facilities. All fuel tanks and storage areas should be sited on sealed areas in order to prevent spillage of fuels and solvents to the nearby watercourses. All waste oils and fuels should be collected in designated tanks prior to disposal.	During the construction	Contractor		~				Deficiency of Mitigation Measures but rectified by the Contractor
S5b.8.1.7	Disposal of chemical wastes should be carried out in compliance with the Waste Disposal Ordinance. The Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes published under the Waste Disposal Ordinance details the requirements to deal with chemical wastes. General requirements are given as follows:		Contractor						Deficiency of Mitigation Measures but rectified by the Contractor
	<ul> <li>Suitable containers should be used to hold the chemical wastes to avoid leakage or spillage during storage, handling and transport.</li> <li>Chemical waste containers should be suitably labelled, to notify and warn the personnel who are handling the wastes, to avoid accidents.</li> <li>Storage area should be selected at a safe location on site and adequate space should be allocated to the storage area.</li> </ul>								

Keppel Seghers – Zhen Hua Joint Venture

				Impl	ementa	ation S	tages*	Relevant	Implementation Status and Remarks
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	
S5b.8.1.8	Sewage Effluent Temporary sanitary facilities, such as portable chemical toilets, should be employed on-site where necessary to handle sewage from the workforce. A licensed contractor would be responsible. For appropriate disposal and maintenance of these facilities.	Work site / During the construction period	Contractor		~			EIAO-TM; ProPECC PN 1/94; WPCO	Implemented
S5b.8.1.9		During the marine construction period	Contractor					EIAO-TM; WPCO, Supporting Document for Application for Variation of Environmental Permit (EP- 429/2012) Further Environmental Permit No. FEP- 01/429/2012/A	N/A

				Imple	emen	tation S	tages*	Relevant	Implementation Status and Remarks
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	
	of the North Western seawall, away from the identified coral communities and will be shielded by silt curtains systems to control sediment plume dispersion.								
	• The silt curtain system at marine access opening should be closed as soon as the barges passes through the marine access opening in order to minimize the period of curtain opening. Filling should only be carried out behind the silt curtain when the silt curtain is completely closed.								
	• To enhance the effectiveness of the silt curtain at the marine access, the northern breakwater would be built before the commencement of the reclamation to reduce the current velocity towards the marine access opening.								
	• The silt curtain system at marine access opening should be regularly checked and maintained to ensure proper functioning.								
	• Where public fill is proposed for filling below +2.5mPD, the fine content in the public fill will be controlled to 25% which is in line with the CEDD's General Specification;								
	• The filling for reclamation should be carried out behind the seawall. The filling material should only consist of public fill, rock and sand. The filling composition and filling rates at each filling area should follow those delineated in Table 1 of the FEP-01/429/2012/. The filling above high watermark is not restricted;								

				Imple	ementa	ation S	tages*	Relevant	Implementation Status and Remarks
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	Ο	Dec	Legislation and Guidelines	
	<ul> <li>No dredging should be carried out within 16m to the nearest non-translocatable coral community;</li> </ul>								
	• Daily site audit including full-time on-site monitoring by the ET is recommended during the dredging for anti-scouring protection layer for checking the compliance with the permitted no. of grab;								
	<ul> <li>Closed grab dredger should be used to minimize the loss of sediment during the raising of the loaded grabs through the water column;</li> </ul>								
	<ul> <li>Frame-type silt curtains should be deployed around the dredging operations;</li> </ul>								
	<ul> <li>Floating-type silt curtains should be used to surround the circular cell during the sheetpiling work;</li> </ul>								
	<ul> <li>The descent speed of grabs should be controlled to minimize the seabed impact speed;</li> </ul>								
	<ul> <li>Barges should be loaded carefully to avoid splashing of material;</li> </ul>								
	<ul> <li>All barges used for the transport of dredged materials should be fitted with tight bottom seals in order to prevent leakage of material during loading and transport;</li> </ul>								
	<ul> <li>All barges should be filled to a level which ensures that material does not spill over during loading and transport to the disposal site and that adequate freeboard is</li> </ul>								

				Imple	ementa	tion S	tages*	Relevant	
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	Implementation Status and Remarks
	maintained to ensure that the decks are not washed by wave action.								
	• No DCM works should be carried out within 100m to the nearest non-translocatable coral colony / colonies.								
	• Silt curtains should be employed to enclose DCM field trial and any full scale DCM work to minimize the potential impacts on water aspect.								
	• A sand blanket is to be placed on top of the marine deposit using tremie pipes prior to the DCM ground treatment to avoid seabed sediment disturbance.								
S5b.8.2.3	<u>Operational Phase Discharges</u> A pipeline drainage system will serve the development area collecting surface runoff from paved areas, roof, etc. Sustainable drainage principle would be adopted in the drainage system design to minimize peak surface runoff, maximize permeable surface and maximize beneficial use of rainwater.	Within IWMF site / During the operational phase	IWMF Operator	~		~		WPCO	N/A
S5b.8.2.4	Oil interceptors should be provided in the drainage system of any potentially contaminated areas (such as truck parking area and maintenance workshop) and regularly cleaned to prevent the release of oil products into the storm water drainage system in case of accidental spillages. Accidental spillage should be cleaned up as soon as practicable and all waste oils and fuels should be collected and handled in	Within IWMF site / During the operational phase	IWMF Operator	~		✓		WPCO; WDO	N/A

				Imple	ementat	tion S	tages*	Relevant	Implementation Status and Remarks
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	
	compliance with the Waste Disposal Ordinance.								
S5b.8.2.5	Refuse Entrapment Collection and removal of floating refuse should be performed at regular intervals for keeping the water within the Project site boundary and the neighboring water free from rubbish.	Within the Project site / During the operational phase	IWMF Operator			<b>√</b>		WPCO	N/A
S5b.8.2.6	Transportation of bottom ash, fly ash and <u>APC residues to WENT Landfill for</u> <u>disposal</u> Covered container should be used in the shipping of the incineration waste to limit the contact between the incineration waste and the marine water. A comprehensive emergency response plan for any accidental spillage should be submitted by the operation contractor to the EPD for agreement before the operation of the facilities. Salvage and cleanup action to recover the spilled incineration waste containers following the spillage should be carried out according to the emergency response plan to mitigate the environmental impact in case of spillage.	Transportat ion of Incineration Ash / During the operational phase	IWMF Operator			V			N/A

\* Des - Design, C - Construction, O - Operation, and Dec - Decommissioning

#### Table B.4 Implementation Schedule for Waste Management Measures for the IWMF at the artificial island near SKC

	Environmental Protection						tages*	Relevant	Implementation Status and Remarks
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	
6b.5.1.2	<ul> <li><u>Good Site Practices</u></li> <li>Adverse environmental impacts in relation to waste management are not expected, provided that good site practices are strictly followed. Recommendations for good site practices during the construction activities would include:</li> <li>Obtain relevant waste disposal permits from appropriate authorities, in accordance with the Waste Disposal Ordinance (Cap. 354) and subsidiary Regulations and the Land (Miscellaneous Provisions) Ordinance (Cap. 28);</li> <li>Provide staff training for proper waste management and chemical handling procedures;</li> <li>Provide sufficient waste disposal points and regular waste collection;</li> <li>Provide appropriate measures to minimize windblown litter and dust during transportation of waste by either covering trucks or by transporting wastes in enclosed containers; and</li> <li>Carry out regular cleaning and maintenance programme for drainage systems, sumps and oil interceptors;</li> <li>Separate chemical wastes for special handling and disposed of to licensed facility for treatment; and</li> <li>Employ licensed waste collector to collect waste.</li> </ul>	Work Site/ During Construction Period	Contractor					WDO; LDO; ETWB TCW No. 19/2005; EIAO-TM	Implemented.

				Imp	lementa	ation S	tages*		Implementation Status and Remarks
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	
6b.5.1.3	Waste Reduction Measures         Good management and control can prevent         the generation of a significant amount of         waste. Waste reduction is best achieved         at the planning and design stage, as well         as by ensuring the implementation of         good site practices.         Recommendations to achieve waste         reduction include:         • Design foundation works that could         minimize the amount of excavated         material to be generated.         • Provide training to workers on the         importance of site cleanliness and         appropriate	Work Site/ During Design & Construction Period	Contractor	<b>v</b>	×			Guideines	Implemented. N/A for demolition items
	<ul> <li>procedures, including waste reduction, reuse and recycling;</li> <li>Sort out demolition debris and excavated materials from demolition works to recover reusable/recyclable portions (i.e. soil, broken concrete, metal etc.);</li> </ul>								
	<ul> <li>Segregate and store different types of waste in different containers, skips or stockpiles to enhance reuse or recycling of materials and their proper disposal;</li> </ul>								
•	<ul> <li>Encourage the collection of aluminum cans by providing separate labelled bins to enable this waste to be segregated from other general refuse generated by the work force;</li> </ul>								
	<ul> <li>Proper storage and site practices to minimize the potential for damage or contamination of construction materials; and</li> </ul>								

	Environmental Protection			Ir	npleme	ntation	Stages*	Relevant	
EIA Ref	Measures / Mitigation Measures	Location / Timing	Implementation Agent		es C	0	Dec	Legislation and Guidelines	Implementation Status and Remarks
	<ul> <li>Plan and stock construction materials carefully to minimize amount of waste to be generated and to avoid unnecessary generation of waste.</li> </ul>								
6b.5.1.7	Dredged Sediment – Application of Dumping Permit The project proponent should agree in advance with MFC of CEDD on the site allocation. The project proponent or contractor for the dredging works shall then apply for the site allocations of marine sediment disposal based on the prior agreement with MFC/CEDD. The project proponent or contractor should also be responsible for the application of all necessary permits from relevant authorities, including the dumping permit as required under DASO from EPD, for the disposal of dredged sediment prior to the commencement of the dredging works.	Seawall and Reclamation site / Construction Period	EPD and i contractor	ts 🗸				DASO ETWB TCW 34/2002	Implemented
6b.5.1.8	Dredged Sediment – Sediment Quality Report The project proponent or contractor will need to satisfy the appropriate authorities that the quality of the marine sediment to be dredged has been identified according to the requirements of ETWB TCW 34/2002. This should be completed well before the dredging works and would include at least the submission of a formal Sediment Quality Report under Tier I of ETWB TCW No. 34/2002 to DEP for approval. Subject to advice from DEP, it is possible that further marine SI in	Seawall and Reclamation site / Construction Period	EPD and i contractor	ts •				DASO ETWB TCW 34/2002	Implemented

				Impl	ementa	ation Stages*	Relevant	Implementation Status and Remarks
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	O Dec	Legislation and Guidelines	
	accordance with ETWB TCW 34/2002 might be necessary for the application of dumping permit under DASO. In such case, a sediment sampling and testing proposal shall be submitted to and approved by DEP before the additional marine SI works.							
6b.5.1.9	Dredged Sediment – Sediment <u>Transportation</u> The barge transporting the sediments to the designated disposal sites should be equipped with tight fitting seals to prevent leakage and should not be filled to a level that would cause overflow of materials or laden water during loading or transportation. In addition, monitoring of the barge loading shall be conducted to ensure that loss of material does not take place during transportation. Transport barges or vessels shall be equipped with automatic self-monitoring devices as specified by the DEP.	Seawall and Reclamation site / Construction Period	EPD and its contractor		<ul> <li></li> </ul>		DASO ETWB TCW 34/2002	Implemented
6b.5.1.10		Work Site/ During Design & Construction Period	Contractor	×	*		ETWB TCW No. 19/2005	Implemented

				Impl	ementa	ation S	tages*	Relevant	
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	Implementation Status and Remarks
	(EMP), should be prepared in accordance with ETWB TCW No.19/2005;								
	<ul> <li>A recording system for the amount of wastes generated, recycled and disposed (including the disposal sites) should be adopted for easy tracking; and</li> </ul>								
	• In order to monitor the disposal of C&D materials at public filling facilities and landfills and to control fly-tipping, a trip- ticket system should be adopted (refer to <i>ETWB TCW No. 31/2004</i> ).								
6b.5.1.1 1 – 6b.5.1.12	The Contactor should prepare and implement an EMP in accordance with	During Design & Construction	Contractor	×	×			ETWB TCW No. 19/2005	Implemented

Keppel Seghers – Zhen Hua Joint Venture

				Imple	ementa	ation S	stages*	Relevant	
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	Implementation Status and Remarks
	All surplus C&D materials arising from or in connection with construction works should become the property of the Contractor when it is removed unless otherwise stated. The Contractor would be responsible for devising a system to work for on-site sorting of C&D materials and promptly removing all sorted and process materials arising from the construction activities to minimize temporary stockpiling on-site. The system should be included in the EMP identifying the source of generation, estimated quantity, arrangement for on-site sorting, collection, temporary storage areas and frequency of collection by recycling Contractors or frequency of removal off-site.								
6b.5.1.13		Work Site/ During Construction Period	Contractor		<b>*</b>			Waste Disposal (Chemical Waste) (General) Regulation	Implemented.

				Impl	ementa	ation S	tages*	Relevant	
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	Implementation Status and Remarks
	licensed collector to transport and dispose of the chemical wastes, to either the Chemical Waste Treatment Centre at Tsing Yi, or another licensed facility, in accordance with the Waste Disposal (Chemical Waste) (General) Regulation.								
6b.5.1.14	<u>General Refuse</u> General refuse should be stored in enclosed bins or compaction units separate from C&D materials. A licensed waste collector should be employed by the Contractor to remove general refuse from the site, separately from C&D materials. Preferably an enclosed and covered area should be provided to reduce the occurrence of 'wind blown' light material.	Work Site/ During Construction Period	Contractor		•			Public Health and Municipal Services Ordinance	Implemented.
6b.5.1.1 6 – 6b.5.1.33	Biogas Generation The Contractor shall review the data and analysis results, and the data from further Site Investigation, if any. Subject to the review findings, the following gas protection measures may be considered if necessary: - gas monitoring after reclamation; - passive ventilation; - gas impermeable membrane; - ventilation with "at risk" rooms; - protection of utilities or below ground services;	Reclamation site (if dredging at the reclamation site is not required) / Design & Construction Period	Designer and/or contractor	×	×			EPD/TR8/97	N/A

				Implemen	tation S	Stages*	Relevant	
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des C	0	Dec	Legislation and Guidelines	Implementation Status and Remarks
6b.5.2.1	Measures     - precautions during construction works;     - precautions prior to entry of belowground services <u>Good Site Practices</u> It is recommended that the following good operational practices should be adopted to minimise waste management impacts:     Obtain the necessary waste disposal permits from the appropriate authorities, in accordance with the	IWMF Site/During Operation Period	IWMF Operator		✓		Guidelines Waste Disposal N. Ordinance (Cap.354); Waste Disposal (Chemical Waste) (General) Regulation; ETWB TCW No. 1/2004	/A
	<ul> <li>Waste Disposal Ordinance (Cap. 354) and Waste Disposal (Chemical Waste) (General) Regulation;</li> <li>Nomination of an approved person to be responsible for good site practice, arrangements for collection and effective disposal to an appropriate facility of all wastes generated at the site;</li> <li>Use of a waste haulier licensed to collect specific category of waste;</li> <li>A trip-ticket system should be included as one of the contractual requirements and implemented by the Environmental Team to monitor the disposal of solid wastes at landfills, and to control fly tipping. Reference should be made to ETWB TCW No. 31/2004.</li> </ul>							

				Impler	menta	ation S	tages*	Relevant	
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	Implementation Status and Remarks
	<ul> <li>Training of site personnel in proper waste management and chemical waste handling procedures;</li> <li>Separation of chemical wastes for special handling and appropriate treatment at a licensed facility;</li> <li>Routine cleaning and maintenance programme for drainage systems, sumps and oil interceptors;</li> <li>Provision of sufficient waste disposal points and regular collection for disposal;</li> <li>Adoption of appropriate measures to minimize windblown litter and dust during transportation of waste, such as covering trucks or transporting wastes in enclosed containers; and</li> <li>Implementation of a recording system for the amount of wastes generated, and disposed of (including recycled the disposal sites).</li> </ul>								
6b.5.2.2	<ul> <li>Waste Reduction Measures</li> <li>Good management and control can prevent the generation of significant amounts of waste. It is recommended that the following good operational practices should be adopted to ensure waste reduction:</li> <li>Segregation and storage of different types of waste in different containers, skips or stockpiles to enhance reuse or recycling of materials and their proper disposal;</li> </ul>	IWMF Site/ During Operation Period	IWMF Operator			V			Implemented

				Imple	ementa	ation S	stages*	Relevant	
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	Implementation Status and Remarks
6b.5.2.3	<ul> <li>Encourage collection of aluminum cans, plastic bottles and packaging material (e.g. carton boxes) and office paper by individual collectors. Separate labelled bins should be provided to help segregate this waste from other general refuse generated by the work force; and</li> <li>Any unused chemicals or those with remaining functional capacity should be reused as far as practicable.</li> <li>Storage, Handling, Treatment, Collection</li> </ul>	IWMF Site/	IWMF Operator					Incineration	N/A
60.5.2.3	Storage, Handling, Treatment, Collection and Disposal of Incineration By-Products The following measures are recommended for the storage, handling and collection of the incineration by- products:	During Operation Period	IWMF Operator			v		Residue Pollution Control Limits	
	<ul> <li>Ash should be stored in storage silos;</li> <li>Ash should be handled and conveyed in closed systems fully segregated from the ambient environment;</li> </ul>								
	<ul> <li>Ash should be wetted with water to control fugitive dust, where necessary;</li> </ul>								
	<ul> <li>All fly ash and APC residues should be treated, e.g. by cement solidification or chemical stabilization, for compliance with the proposed Incineration Residue Pollution Control Limits and leachability criteria prior to disposal;</li> </ul>								

				Impl	ementa	ation S	tages*	Relevant	
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	Implementation Status and Remarks
	<ul> <li>The ash should be transported in covered trucks or containers to the designated landfill site.</li> <li>The Contractor should provide EPD with chemical analysis results of the</li> </ul>								
	bottom ash, and treated fly ash and APC residues to confirm that the ash/residue can comply with the proposed Incineration Residue Pollution Control Limits before disposal.								
6b.6.3.1	<ul> <li>Fuel Oil Tank Construction and Test</li> <li>The fuel tank to be installed should be of specified durability.</li> <li>Double skin tanks are preferred.</li> <li>Underground fuel storage tank should be placed within a concrete pit.</li> <li>The concrete pit shall be accessible to allow regular tank integrity tests to be carried out at regular intervals.</li> <li>Tank integrity tests should be conducted by an independent qualified surveyor or structural engineer.</li> </ul>	Fuel Oil Storage Tank/ During Design, Construction and Operation Periods	IWMF Contractor	✓	✓	✓			N/A
	<ul> <li>Any potential problems identified in the test should be rectified as soon as possible.</li> </ul>								

				Imple	ementa	ation S	tages*	Relevant	
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	Implementation Status and Remarks
6b.6.3.1	<ul> <li>Fuel Oil Pipeline Construction and Test</li> <li>Installation of aboveground fuel oil pipelines is preferable; if underground pipelines are unavoidable, concrete lined trenches should be constructed to contain the pipelines.</li> <li>Double skin pipelines are preferred.</li> </ul>	Fuel Oil Pipelines/ During Design, Construction and Operation Periods	IWMF Contractor	~	~	~			N/A
	<ul> <li>Distance between the fuel oil refuelling points and the fuel oil storage tank shall be minimized.</li> </ul>								
	<ul> <li>Integrity tests for the pipelines should be conducted by an independent qualified surveyor or structural engineer at regular intervals.</li> <li>Any potential problems identified in the test should be rectified as soon as possible.</li> </ul>								
6b.6.3.1	<ul> <li>Fuel Oil Leakage Detection</li> <li>Installation of leak detection device at storage tank and pipelines.</li> <li>Installation and use of pressure gauges (e.g. at the two ends of a filling line) in fuel filling, which allows unexpected pressure drop or difference and sign of leakage to be detected.</li> </ul>	Fuel Oil Storage Tank and Pipelines/ During Design, Construction and Operation Periods	IWMF Contractor	×	✓	×			N/A
6b.6.3.1	Fuel Oil Storage Tank Refuelling	Fuel Oil Refuelling Point/	IWMF Operator			•			N/A

	Environmental Protection			Impl	ementa	ation S	tages*	Relevant	Implementation Status and Remarks
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	
	• Storage tank refuelling (from road tanker) should only be conducted by authorized staff of the oil company using the company's standard procedures.	During Operation Period							
6b.6.3.1	Fuel Oil Spillage Response An Oil Spill Response Plan should be prepared by the operator to document the appropriate response procedures for oil spillage incidents in detail. General procedures to be taken in case of fuel oil spillage are presented below.	IWMF Site/ During Operation Period	IWMF Operator			✓			N/A
	Training								
	<ul> <li>Training on oil spill response actions should be given to relevant staff. The training shall cover the followings:</li> </ul>								
	<ul> <li>Tools &amp; resources to combat oil spillage and fire, e.g. locations of oil spill handling equipment and fire fighting equipment;</li> <li>General methods to deal with oil spillage and fire incidents;</li> <li>Procedures for emergency drills in the event of oil spills and fire; and</li> <li>Regular drills shall be carried out.</li> </ul>								
	Communication								
	-Establish communication channel with the Fire Services Department (FSD) and EPD to report any oil spillage incident								

	Environmental Protection			Imple	ementa	ation S	tages*	Relevant	Implementation Status and Remarks
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	
	so that necessary assistance from relevant department can be quickly sought.								
	Response Procedures								
	-Any fuel oil spillage within the IWMF site should be immediately reported to the Plant Manager with necessary details including location, source, possible cause and extent of the spillage.								
	<ul> <li>Plant Manager should immediately attend to the spillage and initiate any appropriate action to confine and clean up the spillage. The response procedures shall include the following:</li> <li>&gt;Identify and isolate the source of spillage as soon as possible.</li> <li>&gt;Contain the oil spillage and avoid infiltration into soil/ groundwater and discharge to storm water channels.</li> <li>&gt;Remove the oil spillage.</li> </ul>								
	≻Clean up the contaminated area.								
	<ul> <li>If the oil spillage occurs during storage tank refuelling, the refueling operation should immediately be stopped.</li> <li>Recovered contaminated fuel oil and the associated material to remove the spilled oil should be considered as chemical waste.</li> </ul>								

	Environmental Protection			Impl	ementa	ation S	Stages*	Relevant	and Remarks
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	ο	Dec	Legislation and Guidelines	
	procedures for chemical wastes are discussed in the following paragraphs.								
6b.6.3.2	<ul> <li><u>Chemicals and Chemical Wastes Handling &amp; Storage</u></li> <li>Chemicals and chemical wastes should only be stored in suitable containers in purpose-built areas.</li> <li>The storage of chemical wastes should comply with the requirements of the Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes.</li> <li>The storage areas for chemicals and chemical wastes shall have an impermeable floor or surface. The impermeable floor/ surface shall possess the following properties: <ul> <li>Not liable to chemically react with the materials and their containers to be stored.</li> <li>Able to withstand normal loading and physical damage caused by container handling</li> <li>The integrity and condition of the impermeable floor or surface should be inspected at regular intervals to ensure that it is satisfactorily maintained</li> </ul> </li> </ul>	Chemicals and Chemical Wastes Storage Area / During Operation Period	IWMF Operator						N/A

				Implei	menta	ation S <sup>.</sup>	tages*	Relevant	
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	Implementation Status and Remarks
	storage area should be bunded to contain at least 110% of the storage capacity of the largest containers or 20% of the total quantity of the chemicals/chemical wastes stored, whichever is the greater.								
	Storage containers shall be checked at regular intervals for their structural integrity and to ensure that the caps or fill points are tightly closed.								
	Chemical handling shall be conducted by trained workers under supervision.								
6b.6.3.2	<u>Chemicals and Chemical Wastes Spillage</u> <u>Response</u> A Chemicals and/ or Chemical Wastes Spillage Response Plan shall be prepared by the operator to document in detail the appropriate response procedures for chemicals or chemical wastes spillage incidents. General procedures to be undertaken in case of chemicals/ chemical waste spillages are presented below. • Training	IWMF Site/ During Operation Period	IWMF Operator			~			N/A
	<ul> <li>Training on spill response actions should be given to relevant staff. The training shall cover the followings:</li> </ul>								

	Environmental Protection			Imple	ementa	ation St	ages*	Relevant	Implementation Status and Remarks
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	
	Tools & resources to handle spillage, e.g. locations of spill handling equipment;								
	General methods to deal with spillage; and								
	<ul> <li>Procedures for emergency drills in the event of spills.</li> </ul>								
	Communication								
	<ul> <li>Establish communication channel with FSD and EPD to report the spillage incident so that necessary assistance from relevant department can be quickly sought.</li> </ul>								
	Response Procedures								
	<ul> <li>Any spillage within the IWMF site should be reported to the Plant Manager.</li> </ul>								
	<ul> <li>Plant Manager shall attend to the spillage and initiate any appropriate actions needed to confine and clean up the spillage. The response procedures shall include the followings:</li> </ul>								
	Identify and isolate the source of spillage as soon as possible;								
	Contain the spillage and avoid infiltration into soil/								

				Imple	ementa	ation St	ages*	Relevant	
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	Implementation Status and Remarks
	groundwater and discharge to storm water channels (in case the spillage occurs at locations out of the designated storage areas);								
	Remove the spillage; the removal method/ procedures documented in the Material Safety Data Sheet (MSDS) of the chemicals spilled should be observed;								
	Clean up the contaminated area (in case the spillage occurs at locations out of the designated storage areas); and								
	The waste arising from the cleanup operation should be considered as chemical wastes.								
6b.6.3.3	Preventive Measures for Incineration By- products Handling         The recommended measures listed below can minimize the potential contamination to the surrounding environment due to the incineration by-products:         • Ash should be stored in storage silos;         • Ash should be handled and conveyed in closed systems fully segregated	Storage, Handling & Collection of Incineration Ash at IWMF/ During Operation Period	IWMF Operator			×			N/A

				Imple	ementa	ation S	tages*	Relevant	Implementation Status and Remarks
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	
	<ul> <li>from the ambient environment;</li> <li>Ash should be wetted with water to control fugitive dust, where necessary;</li> <li>All fly ash and APC residues should be treated, e.g. by cement solidification or chemical stabilization, for compliance with the proposed Incineration Residue Pollution Control Limits and leachability criteria prior to disposal;</li> <li>The ash should be transported in covered trucks or containers to the</li> </ul>		Agent						
6b.6.3.4 -6b.6.3.6	designated landfill site.Incident RecordAfter any spillage, an incident report should be prepared by the Plant Manager. The incident report should contain details of the incident including the cause of the incident, the material spilled and estimated spillage amount, and also the response actions undertaken. The incident record should be kept carefully and able to be retrieved when necessary.The incident report should provide sufficient details for the evaluation of any environmental impacts due to the spillage and assessment of the effectiveness of measures taken.	IWMF Site/ During Operation Period	IWMF Operator			<b>v</b>		Guidance Manual for Use of Risk-based Remediation Goals for Contaminated Land Management and the Guidance Note for Contaminated Land and Remediation.	N/A

Keppel Seghers – Zhen Hua Joint Venture

	Environmental Protection		••••••••••••••••	Impl	ement	ation S	stages*	Relevant	Implementation Status and Remarks
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing		Des	С	0	Dec	Legislation and Guidelines	
	In case any spillage or accidents results in significant land contamination, EPD should be informed immediately and the IWMF operator should be responsible for the cleanup of the affected area. The responses procedures described in <b>Section 6b.6.3.1</b> and <b>Section 6b.6.3.2</b> of EIA report should be followed accordingly together with the land contamination assessment and remediation guidelines stipulated in the <i>Guidance Manual for Use</i> of Risk-based Remediation Goals for Contaminated Land Management and the <i>Guidance Note for Contaminated Land and</i> Remediation.								

\* Des - Design, C - Construction, O – Operation, and Dec - Decommissioning

	Environmental Protection			Imple	ementa	ation S	tages*	Relevant	Implementation Status and Remarks
EIA Ref	Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	
7b.8.2.1	<ul> <li>Measures to avoid direct loss of intertidal habitat</li> <li>The site boundary has been proposed to avoid direct contact with the intertidal natural rocky shore of Shek Kwu Chau. It avoids direct loss of intertidal communities and the existing natural rocky shore habitat, where Reef Egret and White-bellied Sea Eagle have been recorded within and in the vicinity of this habitat.</li> </ul>	IWMF site	Design team	~				EIAO-TM	N/A
7b.8.2.2	<ul> <li>Measures to minimise loss of coastal subtidal habitat</li> <li>Extensive coral colonies were recorded at the coastal hard bottom habitat at Shek Kwu Chau. To avoid and minimise the extensive direct impact on the coral colonies, the proposed reclamation area has been moved further offshore to minimise loss of subtial habitat near shore.</li> </ul>	IWMF site	Design team	×				EIAO-TM	N/A
7b.8.2.3	<ul> <li>Zero Discharge Scheme</li> <li>The design scheme of the Project has avoided discharge of wastewater into the marine environment. A zero discharge scheme would be adopted during the operation of the Project. An on-site wastewater treatment plant would be</li> </ul>	IWMF site	Design team, IWMF operator	×		×		WPCO	N/A

### Table B.5 Implementation Schedule for Ecological Quality Measures for the IWMF at the artificial island near SKC

Integrated Waste Management Facilities, Phase 1

	Environmental Protection				Impl	ementa	ation S <sup>e</sup>	tages*	Relevant	
EIA Ref	Measures / Mitigation Measures	Location / Timing	-	Implementation Des Agent		С	0	Dec	Legislation and Guidelines	Implementation Status and Remarks
	provided to treat the wastewater generated from the IWMF (mainly human sewage). The treated effluent would be re-used in the incineration plant and mechanical treatment plant, or for onsite washdown and landscape.									
7b.8.2.4	<ul> <li>Measures to avoid loss of plant species of conservation importance</li> <li>Landing portal construction works would not cause direct lost to the recorded individual of protected plant species,</li> <li>Aquilaria sinensis, at the coastal shrubland habitat at Cheung Sha. As a precautionary measure, the plant should be tagged with eye- catching tape and fenced off prior to works, in order to avoid any damage by workers.</li> </ul>	Cheung Sha landing portal	Design Contractor	team,	✓	~		✓	EIAO-TM	N/A
7b.8.3.1 - 7b.8.3.1 5	<ul> <li>Measures to minimise water quality impact</li> <li>Measures for water quality as recommended in Section 5b of the EIA Report should be implemented.</li> </ul>	Work site	Design contractor, operator	team, IWMF	✓	~	~	~	EIAO-TM; ProPECC PN 1/94; WPCO	Implemented
7b.8.3.1 6 - 7b.8.3.3 0	Measures to minimise disturbance on Finless Porpoise Minimisation of Habitat Loss for Finless Porpoise	IWMF site, work site, marine traffic route	Design contractor, operator	team, IWMF	✓	~	✓	•	EIAO-TM, Supporting Document for Application for Variation of the Environmental	Implemented for avoidance o construction works that may produce underwater acoustic disturbance, Vessel Travel Route implementation, training of staff; N/A for others

Integrated Waste Management Facilities, Phase 1

	Environmental Protection			Imple	ement	ation S	stages*	Relevant	
EIA Ref	Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	ο	Dec	Legislation and Guidelines	Implementation Status and Remarks
	<ul> <li>Substantial revision has been made on the layout plan and form of the breakwater, in order to minimise the potential loss of important habitat for Finless Porpoise. The revision has greatly reduced the size of the embayment area, as well as the Project footprint. As a result, the size of habitat loss for Finless Porpoise has reduced from the original ~50 ha, down to ~31 ha.</li> <li>Avoidance of peak season for finless porpoise occurrence</li> <li>To minimise potential acoustic disturbance from construction activities on Finless Porpoise, construction works that may produce underwater acoustic disturbance should be scheduled outside the months with peak Finless Porpoise occurrence (December to May), including:         <ul> <li>sheet piling works for construction of cofferdam surrounding the reclamation area</li> </ul> </li> </ul>		Agent						
	<ul> <li>(Phase 1);</li> <li>sheet piling works for construction of the shorter section of breakwater (Phase 1);</li> </ul>								

Integrated Waste Management Facilities, Phase 1

	Environmental Protection			Imple	ementa	ation S	tages*	Relevant	Implementation Status and Remarks
EIA Ref	Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	
	<ul> <li>sheet piling works for construction of the remaining section of breakwater (Phase 3) and</li> <li>bored piling works for berth area (Phase 3)</li> </ul>								
	Such works should be restricted within June to November. This approach would not only avoid the peak season for Finless Porpoise occurrence, the magnitude of impacts arise from acoustic disturbance would also be minimised.								
	• Since the DCM ground treatment and the installation of precast seawalls and breakwaters should generate no underwater acoustic disturbance to Finless Porpoise, no specific mitigation measures are required.								
	Opt for quieter construction methods and plants								
	<ul> <li>Considering the sensitivity of marine mammals to underwater acoustic disturbance, instead of the previously proposed conventional breakwater and reclamation peripheral structure,</li> </ul>								
	which requires noisy piling works, the current circular cells structure for								

Integrated Waste Management Facilities, Phase 1

	Environmental Protection			Imple	ementa	ation S	tages*	Relevant	Implementation Status and Remarks
EIA Ref	Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	
	<ul> <li>breakwater and reclamation peripheral structure is proposed. A quieter sheet piling method using vibratory hammer or hydraulic impact hammer, should be adopted for the installation of circular cells for cellular cofferdam and northern breakwater during Phase 1, and southern breakwater Phase 3;</li> <li>Non-percussive bore piling method would be adopted for the installation of tubular piles for the berth construction</li> </ul>								
	during Phase 3. <i>Monitored exclusion zones</i> • During the installation/re-								
	installation/relocation process of floating type silt curtains, in order to avoid the accidental entrance and entrapment of marine mammals within								
	the silt curtains, a monitored exclusion zone of 250 m radius from silt curtain should be implemented. The exclusion zone should be closely								
	monitored by an experienced marine mammal observer at least 30 minutes before the start of installation/re-								
	installation/relocation process. If a marine mammal is noted within the exclusion zone, all marine works should stop immediately and remain								

Integrated Waste Management Facilities, Phase 1

	Environmental Protection			Imple	ementa	ation S	tages*	Relevant	Implementation Status and Remarks
EIA Ref	Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	
	exclusion zone is free from marine mammals.								
	• The experienced marine mammal observer should be well trained to detect marine mammals. Binoculars should be used to search the exclusion zone from an elevated platform with unobstructed visibility. The observer should also be independent from the project proponent and has the power to call-off construction activities.								
	<ul> <li>In addition, as marine mammals cannot be effectively monitored within the proposed monitored exclusion zone at night, or during adverse weather conditions (i.e. Beaufort 5 or above, visibility of 300 meters or below), marine works should be avoided under weather conditions with low visibility.</li> </ul>								
	Marine mammal watching plan								
	<ul> <li>Upon the completion of the installation/re- installation/relocation of floating type silt curtain, all marine works would be conducted within a fully enclosed environment within the silt curtain, hence exclusion zone monitoring would no longer</li> </ul>								

Integrated Waste Management Facilities, Phase 1

	Environmental Protection			Imple	ementa	ation S	tages*	Relevant	Implementation Status and Remarks
EIA Ref	Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	
	be required. Subsequently, a marine mammal watching plan should be implemented.								
	The plan should include regular inspection of silt curtains, and visual inspection of the waters surrounded by the curtains. Special attention should be paid to Phase 2 (reclamation) where the floating type still curtain would be opened occasionally for vessel access, leaving a temporary 50 m opening. An action plan should be devised to cope with any unpredicted incidents such as the case when marine mammals are found within the waters surrounded by the silt curtains.								
	Small openings at silt curtains								
	• The openings for vessel access at the silt curtains should be as small as possible to minimise the risk of accidental entrance.								
	Adoption of regular travel route								
	<ul> <li>During construction and operation, captains of all vessels should adopt regular travel route, in order to minimize the chance of vessel collision with</li> </ul>								

Integrated Waste Management Facilities, Phase 1

	Environmental Protection			Imple	ement	tation S	stages*	Relevant	Implementation Status and Remarks
EIA Ref	Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	ο	Dec	Legislation and Guidelines	
	marine mammals, which may otherwise result in damage to health or mortality. The regular travel route should avoid areas with high sighting density of Finless Porpoise as much as possible.								
	Vessel speed limit								
	• The frequent vessel traffic in the vicinity of works area may increase the chance of mammal mammals being killed or seriously injured by vessel collision. A speed limit of ten knots should be strictly enforced within areas with high density of Finless Porpoise.								
	<ul> <li>Passive acoustic monitoring and land- based theodolite monitoring surveys should be adopted to verify the predicted impacts and effectiveness of the proposed mitigation measures.</li> </ul>								
	Training of Staff								
	• Staff, including captains of vessels, should be aware of the guidelines for safe vessel operations in the presence of cetaceans during construction and operation phases. Adequate trainings should be provided								

Integrated Waste Management Facilities, Phase 1

	Environmental Protection				Impl	Implementa		Stages*	Relevant	
EIA Ref	Measures / Mitigation Measures	Location / Timing	Impleme Age		Des	С	0	Dec	Legislation and Guidelines	Implementation Status and Remarks
7b.8.3.3 1 - 7b.8.3.3 4	Measures to minimise impact on corals Coral translocation	IWMF site	Design contractor, operator	team, IWMF	~	~	✓	~	EIAO-TM	Implemented, tagged coral found missing after hitting by typhoons
	<ul> <li>Coral communities within and in proximity to the proposed dredging sites would be disturbed by the Project due to the dredging operations. In order to minimise direct loss of coral communities, translocation of corals that are attached to movable rocks with diameter less than 50 cm are recommended. In order to avoid disturbance to corals during the spawning period, the spawning season of corals (June to August) should be avoided; and that translocation should be carried out during the winter season (November- March).</li> </ul>									Re-tagging of 10 coral colonies at indirect impact site and control site were conducted in November and December 2018 respectively.
	• The REA survey results suggest that the 198 directly affected coral colonies were attached to movable rocks (less than 50 cm in diameter). It is technically feasible to translocate them to avoid direct loss.									
	<ul> <li>Prior to coral translocation, a more detailed baseline survey, including         <ul> <li>a coral</li> <li>mapping survey, is</li> <li>recommended to further confirm the</li> </ul> </li> </ul>									

Integrated Waste Management Facilities, Phase 1

	Environmental Protection			Imple	menta	ation S	tages*	Relevant	Implementation Status and Remarks
EIA Ref	Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	
	exact number and location of coral colonies within the potentially affected area. A more detailed coral translocation plan, including selection of suitable recipient site, plan for coral translocation, and event / action plan for coral monitoring should be submitted upon approval of this Project, prior to commencement of construction works. Advice from relevant governmental departments (i.e. AFCD) and professionals would be sought after, in order to identify a desirable location for the relocation of coral communities. Post-translocation monitoring on the translocated corals should also be considered.								
	Coral monitoring programme								
	<ul> <li>A coral monitoring programme is recommended to assess any adverse and unacceptable impacts to the coral communities at the coasts of Shek Kwu Chau during construction of the Project.</li> </ul>								
	Phasing of Works								
	<ul> <li>To minimize environmental impacts, the proposed phasing of construction works has been carefully designed to</li> </ul>								

Integrated Waste Management Facilities, Phase 1

	Environmental Protection			Impl	ementa	ation S	tages*	Relevant	
EIA Ref	Measures / Mitigation Measures	Location / Timing			С	ο	Dec	Legislation and Guidelines	Implementation Status and Remarks
	reduce the amount of concurrent works, hence minimize SS elevation and the associated impacts on corals.								
7b.8.3.3 5 - 7b.8.3.4 1	<ul> <li><u>Specific measures to minimize</u> <u>disturbance on breeding White-bellied</u> <u>Sea Eagle</u></li> <li>Avoidance of noisy works during the breeding season of White-bellied Sea Eagle</li> <li>To minimize potential noise disturbance from construction activities on WBSE, noisy construction works should be scheduled outside their breeding season (December to May) to minimise potential degradation in breeding ground quality and breeding activities, including:</li> <li>sheet piling works for construction of cofferdam surrounding the reclamation area (Phase 1);</li> <li>sheet piling works for construction of the shorter section of breakwater (Phase 1);</li> <li>sheet piling works for construction of the remaining section of breakwater (Phase 3); and</li> <li>bored piling works for berth area (Phase 3).</li> </ul>		Design Team, Contractor, IWMF operator					EIAO-TM	Implemented

Integrated Waste Management Facilities, Phase 1

	Environmental Protection			Imple	ementa	ation S	tages*	Relevant	Implementation Status and Remarks
EIA Ref	Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	
	Opt for quieter construction methods and plants								
	<ul> <li>To minimise potential construction noise disturbance on WBSE, quieter construction methods and plants should be adopted. The recommended noise mitigation measures in the Noise chapter (Section 4b.8 of the EIA Report) should be implemented to minimise potential noise disturbance to acceptable levels.</li> </ul>								
	Restriction on vessel access near the nest of White-bellied Sea Eagle								
	• During construction and operation, in order to minimize disturbance on the existing WBSE nest, a pre-defined practical route to restrict vessel access near the nest should be adopted to keep vessels and boats as far away from the nest as possible.								
	White-bellied Sea Eagle monitoring programme								
	<ul> <li>A WBSE monitoring programme is recommended to assess any adverse and unacceptable impacts to the breeding activities of WBSE during construction and operation of the</li> </ul>								

Integrated Waste Management Facilities, Phase 1

	Environmental Protection			Imple	ementa	ation S	tages*	Relevant	Implementation Status and Remarks
EIA Ref	Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	ο	Dec	Legislation and Guidelines	
	<ul> <li>Project. Monitoring surveys for WBSE would include pre-construction phase (twice per month for duration of three months during their breeding season -between December and May, immediately before the commencement of works), construction phase, and operation phase (two years after the completion of construction works).</li> <li>Surveys should be conducted twice per month during their breeding season (from December to May); and once per month outside breeding season (June to November). More details on monitoring for WBSE are presented in the EM&amp;A Manual.</li> </ul>								
	<ul> <li>Education of staff</li> <li>Staff, including captains of all vessels during construction and operation</li> </ul>								
	phases, should be aware of the ecological importance of WBSE. Awareness should be raised among staff to minimise any intentional or unintentional disturbance to the nest.								
	Minimisation of Glare Disturbance								

Integrated Waste Management Facilities, Phase 1

	Environmental Protection			Im	plement	ation S	stages*	Relevant	Imm Inmentation Otature
EIA Ref	Measures / Mitigation Measures	Location / Implementatio Timing Agent		) De	Des C O De		Dec	Legislation and Guidelines	Implementation Status and Remarks
	<ul> <li>To minimise glare disturbance on WBSE, which may cause disorientation of birds by interfering with their magnetic compass, and disruption in behavioural patterns such as reproduction, fat storage and foraging pattern, any un-necessary outdoor lighting should be avoided, and in-ward and down-ward pointing of lights should be adopted.</li> </ul>								
-	<ul> <li><u>Construction of Seawall/Breakwaters</u></li> <li>To widen the open channel between the Artificial Island and Shek Kwu Chau.</li> <li>To design the precast concrete seawall with environmental friendly features.</li> </ul>	IWMF site	Design team, contractor, IWN operator		V			Supporting Document for Application for Variation of Environmental Permit (EP- 429/2012)	N/A
7b.8.3.42	<ul> <li>Opt for Quieter Construction Methods and Plants</li> <li>Quieter construction methods and plants should be used to minimise disturbance to the nearby terrestrial habitat and the associated wildlife.</li> </ul>	Work site	Design team contractor, IWN operator		V	~	V	EIAO-TM	Implemented
7b.8.3.43	<ul> <li>Measures to minimize impacts from artificial lighting</li> <li>Unnecessary lighting should be avoided, and shielding of lights should be provided to minimize disturbance from light pollution on fauna groups.</li> </ul>	IWMF site	Design tean contractor, IWN operator		V	•		EIAO-TM	Implemented

Integrated Waste Management Facilities, Phase 1

	Environmental Protection			Impl	ementa	ation S	tages*	Relevant	
EIA Ref	Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	Implementation Status and Remarks
7b.8.3.4 4 - 7b.8.3.4 5	<ul> <li>Measures to minimize accidental spillage</li> <li>Regular maintenance of vessels, vehicles and equipment that may cause leakage and spillage should only be undertaken within predesignated areas, which are appropriately equipped to control the associated discharges.</li> <li>Oils, fuels and chemicals should be contained in suitable containers, and only be used and stored in designated areas which have pollution prevention facilities. All fuel tanks and storage areas should be sited on sealed areas in order to prevent spillage of fuels and solvents to the nearby watercourses. All waste oils and fuels should be collected in designated tanks prior to disposal.</li> </ul>	Work site	Contractor, IWMF operator		✓			EIAO-TM	Deficiency of Mitigation Measures but rectified by the Contractor.
7b.8.3.46	<ul> <li>Measures to minimise sewage effluent</li> <li>Temporary sanitary facilities, such as portable chemical toilets, should be employed on-site where necessary to handle sewage from the workforce.</li> </ul>	Work site	Contractor		~			EIAO-TM	N/A
7b.8.3.47		Work site	Contractor		~		~	EIAO-TM	N/A

Integrated Waste Management Facilities, Phase 1

	Environmental Protection			Imple	ementa	ation S	tages*	Relevant	Implementation Status and Remarks
EIA Ref	Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	
	Potential ecological impacts resulted								
	from potential degradation of water								
	quality due to unmitigated surface								
	runoff could be minimised via the								
	detailed mitigation measures in <b>Section</b>								
	<b>5b.8</b> of the EIA Report. The following								
	presents some of the mitigation								
	measures:								
	<ul> <li>On-site drainage system with implemented</li> </ul>								
	sedimentation control facilities.								
	- Channels, earth bunds or sand bag								
	barriers should be provided on site								
	to direct storm water to silt removal								
	facilities.								
	- Provision of embankment at								
	boundaries of								
	earthworks for flood protection.								
	<ul> <li>Water pumped out from</li> </ul>								
	foundation piles must be								
	discharged into silt removal								
	facilities.								
	- During rainstorms, exposed slope/soil surfaces should be								
	covered by tarpaulin or other								
	means, as far as practicable.								
	- Exposed soil surface should be								
	minimized to reduce siltation and								
	runoff.								
	- Earthwork final surfaces should be								
	well compacted. Subsequent								
	permanent surface protection								
	should be immediately performed.								

Integrated Waste Management Facilities, Phase 1

	Environmental Protection			Impl	ementa	tion S	tages*	Relevant	
EIA Ref	Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	Implementation Status and Remarks
	- Open stockpiles of construction materials, and construction wastes on- site should be covered with tarpaulin or similar fabric during rainstorms.								
7b.8.3.48	<ul> <li>Measures to minimise impacts from general construction activities</li> <li>To avoid the entering of construction solid waste into the nearby habitats, construction solid waste should be collected, handled and disposed of properly to avoid entering to the nearby habitats. It is recommended to clean the construction sites on a regular basis.</li> </ul>	Work site	Contractor		~			EIAO-TM	Implemented
7b.8.3.49	Pest Control         Good waste management practices should be adopted at the IWMF in order to minimise the risk of introduction of pest to the island:         -       Transportation of wastes in enclosed containers         -       Waste storage area should be well maintained and cleaned         -       Waste should only be disposed of at designated areas         -       Timely removal of the newly arrived waste         -       Removal of items that are capable of retaining water		IWMF operator			V			N/A

Integrated Waste Management Facilities, Phase 1

	Environmental Protection			Impl	ementa	ation Sta	ages*	Relevant	
EIA Ref	Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	ο	Dec	Legislation and Guidelines	Implementation Status and Remarks
	<ul> <li>Rapid clean up of any waste spillages</li> <li>Maintenance of a tidy and clean site environment</li> <li>Regular application of pest control</li> <li>Education of staff the importance of site cleanliness</li> </ul>								
7b.8.3.50	Control of Marine Habitat Quality during Operation Phase	IWMF site	IWMF operator			~		EIAO-TM; WPCO	N/A
	<ul> <li>Depending on the seabed condition of the approach channel for marine vessels during operation phase of the IWMF, maintenance dredging may be required to ensure safe access. In order to avoid degradation in water quality due to elevation in SS and dispersion of sediment plume due to dredging works, it is recommended that any future maintenance dredging works should not be carried out within 100 m from the shore, similar to that of the dredging for anti-scouring protection layer during construction phase. All maintenance dredging works should be carried out with the implementation of silt curtain to control the dispersion of SS. The production rate should comply with the permit dredging rate and number of grab per hour.</li> </ul>								

Integrated Waste Management Facilities, Phase 1

	Environmental Protection	Leastion (		Imple	ementa	ation S	tages*	Relevant	
EIA Ref	Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	Implementation Status and Remarks
7b.8.4. 1 – 7b.8.4. 3	<ul> <li>Measures</li> <li><u>Compensation of loss of important habitat of Finless Porpoise</u></li> <li><i>Designation of Marine Park</i></li> <li>The Project Proponent has made a firm commitment to seek to designate a marine park of approximately 700 ha in the waters between Soko Islands and Shek Kwu Chau, in accordance with the statutory process stipulated in the Marine Parks Ordinance, as a compensation measure for the habitat loss arising from the construction of the IWMF at the artificial island near SKC.</li> <li>The Project Proponent shall seek to complete the designation by 2018 to tie in with the operation of the IWMF at the artificial island near SKC.</li> <li>A further study should be carried out to review relevant previous studies and collate available information on the ecological characters of the proposed area for marine park designation; and review available survey data for Finless Porpoise, water quality, fisheries, marine traffic and planned development projects in the vicinity.</li> </ul>	between Shek Kwu Chau and Soko Islands	Project Proponent					Guidelines EIAO-TM	N/A

Integrated Waste Management Facilities, Phase 1

	Environmental Protection			Impl	ementa	ation Stage	s* Relevant	Implementation Status and Remarks
EIA Ref	Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	O De	c Legislation and Guidelines	
	marine park designation should be established, and the extent and location of the proposed marine park be determined. The adequacy of enhancement measures should also be reviewed.							
	<ul> <li>In addition, a management plan for the proposed marine park should be proposed, covering information on the responsible departments for operation and management (O&amp;M) of the marine park, as well as the O&amp;M duties of each of the departments involved. Consultation with relevant government departments and stakeholders should be conducted under the study. The study should be submitted to Director of Environmental Protection (DEP) for approval before the commencement of construction works.</li> </ul>							
	• The Project Proponent should provide assistance to AFCD during the process of the marine park designation.							
7b.8.5. 1 – 7b.8.5. 4	Additional Enhancement or <u>Precautionary Measures</u> <i>Deployment of Artificial Reefs</i> • Deployment of artificial reefs (ARs) is	Within the proposed marine park under this study		<b>√</b>		×	EIAO-TM	N/A
	an enhancement measure for the							

Contract No. EP/SP/66/12

Integrated Waste Management Facilities, Phase 1

Keppel Seghers – Zhen Hua Joint Venture

	Environmental Protection			Imple	ementa	ation S	tages*	Relevant	
EIA Ref	Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	Implementation Status and Remarks
	<ul> <li>marine habitats. ARs are proposed to be deployed within the proposed marine park under this Project. The exact location, dimension and type of ARs to be deployed are to be further investigated along with the further study of the proposed marine park under this Project. The proposed ARs would be deployed at the same time as the complete designation of marine park.</li> <li>Release of Fish Fry at Artificial Reefs and Marine Park</li> <li>Release of fish fry at the proposed marine park under this study, should enhance the fish resources in the nearby waters, and subsequently food sources for Finless Porpoise. The proposed ARs</li> </ul>							Guidelines	
	with various micro-habitats would have the potential to provide shelter and nursery ground for the released fish fry.								
	The frequency and quantity of fry to be released should be agreed by AFCD.								

\* Des - Design, C - Construction, O – Operation, and Dec - Decommissioning

					Imple	ementa	ation S	Stages*	Relevant	Implementation
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Impleme Age		Des	С	0	Dec	Legislation and Guidelines	Status and Remarks
8b.8.1.2	<ul> <li>Measure to minimize loss of and disturbance on fisheries resources</li> <li>Alteration to the phasing of works, construction method, and layout plan of the IWMF at the artificial island near SKC has been made. The total fishing ground to be permanently lost due to the project has been significantly reduced from ~50 ha to ~31 ha. By adopting the current circular cells instead of the conventional seawall</li> </ul>	IWMF site	Design contractor	team,	V	V		×	EIAO-TM	N/A
	construction method, SS elevation would be greatly reduced, minimizing adverse impact on the health of fisheries resources.									
8b.8.1.3	Measure to minimize impingement and entrainment	IWMF site	Design contractor, operator	team, IWMF	<b>√</b>	~	~		EIAO-TM	N/A
	• Provision of a screen at the water intake point for desalination plant would be essential to minimize the risk of impingement and entrainment of fisheries resources (including fish, larvae and egg) through the intake point.									

#### Table B.6 Implementation Schedule for Fisheries Measures for the IWMF at the artificial island near SKC

						Imple	ement	ation S	Stages*	Relevant	Implementation
EIA Ref	Environmental Protection Measures / Mitigation Measures		ation / ming	Implemer Age		Des	С	0	Dec	Legislation and Guidelines	Status and Remarks
8b.8.1.4- 8b.8.1.6	<ul> <li>Measures to control water quality</li> <li>No wastewater effluent, anti-fouling agent, heavy metals and other contaminants would be released during operation phase of the Project.</li> </ul>	Work site	site, IWMF	Design contractor, operator	team, IWMF	~	•	✓	V	EIAO-TM	Implemented
	Mitigation measures recommended in the water quality impact assessment during construction and operation would serve to protect fisheries resources from indirect impacts resulted from the Project										
8b.8.1.7  8b.8.1.8	<ul> <li><u>Additional Enhancement / Precautionary</u> <u>Measures</u></li> <li>Artificial Reefs (ARs) are proposed to be deployed within the proposed marine park under this Project as an enhancement measure for the marine habitats. This enhancement feature would bring positive impacts to the previously identified important spawning and nursery ground for fisheries resources.</li> <li><i>Release of Fish Fry at Artificial Reefs</i></li> <li>Release of fish fry has been proposed under this Project. The proposed deployment of ARs within the proposed marine park would provide shelter and nursery ground for the released fish fry. The frequency and quantity of fry to be released should be agreed by AFCD.</li> </ul>	betwee Islands Shek Chau	ed park waters en Soko	Project Pro	ponent	<ul> <li></li> </ul>		✓		EIAO-TM	N/A

\* Des - Design, C - Construction, O – Operation, and Dec - Decommissioning

Table B.7	Implementation Schedule for Landscape and	d Visual Measure	es for the IWMF at th	e artific	cial isl	and ne	ear SKC		
				Imple	ementa	ation S	Stages*	Relevant	Implementation
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	Status and Remarks
S10b.10 MLVC- 01	Grass-hydroseeded bare soil surface and stock pile area	Work site / During construction phase	Contractor		•				N/A
S10b.10 MLVC-02	<ul> <li>Landscape Design</li> <li>1) Early planting using fast grow trees and tall shrubs at strategic locations within site as buffer to block view corridors to the site from the VSRs, and to locally screen haul roads, excavation works and site preparation works.</li> </ul>	phases	Contractor	✓ ✓	•				N/A
	2) Use of tree species of dense tree crown to serve as visual barrier.								
	<ol> <li>Hard and soft landscape treatment (e.g. trees and shrubs) of open areas within development to provide a background for the outdoor containers from open view, shade and shelter, and a green appearance from surrounding viewpoints.</li> </ol>								
	4) Planting strip along the periphery of the project site.								
	5) Selected tree species suitable for the coastal condition.								

#### Table B.7 Implementation Schedule for Landscape and Visual Measures for the IWMF at the artificial island near SKC

# Keppel Seghers – Zhen Hua Joint Venture

				Implemer	tation S	Stages*	Relevant	Implementation
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des C	0	Dec	Legislation and Guidelines	Status and Remarks
S10b.10 MLVC-03	<ul> <li><u>Adoption of Natural Features of the Existing</u></li> <li><u>Shoreline</u></li> <li>1) Use of boulders in different sizes and with the similar textures of the existing rocky shores for the construction of breakwater and artificial shoreline in order to blend into the existing natural shoreline.</li> </ul>	Work site / During construction phase	Contractor					N/A
	2) Use of cellular cofferdam together with the natural boulders to form a curvature shoreline for the reclamation area to echo with the natural shoreline of SKC.							
S10b.10 MLVC-04	<ul> <li><u>Greening Design (Rooftop &amp; Vertical Greening)</u></li> <li>1) Implementation of rooftop and vertical greening (vertical building envelope) along the periphery of each building block to increase the amenity value of the work, moderate temperature extremes and enhance building energy performance. The greening appearance of the building shall enhance its visual harmony with the natural surroundings as well as reduce the apparent visual mass of the structure.</li> </ul>	Work site / During design & construction phases	Contractor					N/A
	<ol> <li>Sufficient space between concrete enclosure and stack to minimize heat transfer.</li> </ol>							
	3) Introduction of landscape decks at the stack to further enhance the overall natural and green concept unique for this site.							

# Keppel Seghers – Zhen Hua Joint Venture

				Imple	ementa	ation S	tages*	Relevant	Implementation
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	Status and Remarks
S10b.10 MVC-01	Visual Mitigation and Aesthetic Design	Structures in IWMF /	Contractor	~	✓				N/A
MVC-01	<ol> <li>Use of natural materials with recessive color to minimize the bulkiness of the building.</li> </ol>	During design & constructio							
	<ol> <li>Adoption of innovative aesthetic design to the chimney to minimize or visually mitigate the massing of the chimney so as to reduce its visual impact to the surroundings.</li> </ol>	n phases							
	<ol> <li>Color of the chimney in a gradual changing manner to match with the color of the sky.</li> </ol>								
	<ol> <li>Provision of observation deck for public enjoyment at the top of the chimney to diminish the feeling of chimney.</li> </ol>								
	<ul> <li>5) Provision of sky gardens between the two stacks to allow additional greening for enhancing the aesthetic quality.</li> <li>Maintenance access (elevator and staircase) from the ground floor to the sky gardens will be provided to allow maintenance of the sky gardens.</li> </ul>								
	<ol> <li>Integration of the visitor's walkway with different material façade design of incinerator plant to enhance the aesthetic quality.</li> </ol>								
S10b.10 MVC-02	Control of the security floodlight for construction areas at night to avoid excessive glare to the surrounding receiver.	Work site / During construction phase	Contractor		✓				Implemented

				Implem	nenta	tion S	tages*	Relevant	Implementation
EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Des	С	0	Dec	Legislation and Guidelines	Status and Remarks
S10b.10 MVC-03	Optimization of the construction sequence and construction programme to minimize the duration of impact.	Work site / During design & construction phases	Contractor	~	✓				Implemented
S10b.10 MVC-04	Storage of the backfilling materials for site formation & construction materials / wastes on site at a maximum height of 2m, covered with an impermeable material of visually un- obtrusive material (in earth tone).	Work site / During construction phase	Contractor		~				N/A
S10b.10 MVC-05	Reduction of the number of construction traffic at the site to practical minimum.	Work site / During construction phase	Contractor		✓				Implemented
S10b.10 MLVO-01	Planting Maintenance Provision of proper planting maintenance and replacement of defective plant species on the new planting areas to enhance aesthetic and landscape quality.	Project site / During Operation phase	Contractor			✓			N/A
S10b.10 MVO-01	Environmental Education Centre Development of an Environmental Education Center, in which regular exhibitions and lectures to promote environmental awareness and waste reduction concept would be provided, as a part of the IWMF for the general public to alleviate negative public perceptions of the development.	Project site / During Operation phase	Contractor			~			N/A
S10b.10 MVO-02	<u>Control of Light</u> Control the numbers of lights and their intensity to a level that is good enough to meet the safety requirements at night but not excessive.	Project site / During Operation phase	Contractor			~			N/A

Keppel Seghers – Zhen Hua Joint Venture

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Imple Des	ementat C	ion S O	tages* Dec	Relevant Legislation and Guidelines	Implementation Status and Remarks
S10b.10 MVO-03	<u>Control of Operation Time</u> Minimization of the frequency of waste transportation to practical minimum (e.g. limit the reception of MSW from 8 am to 8 pm)	Project site / During Operation phase	Contractor			~			N/A

\* Des - Design, C - Construction, O – Operation, and Dec - Decommissioning

# Appendix C Impact Monitoring Schedule of the Reporting Month

			Impact Monitoring Schedule for IWMF		
			Aug-22		
in	Mon	Tue	Wed	Thu	Fri
	1	2	3	4	5
	Impact	Impact	Impact		Imp
	Water Quality monitoring for B1, B2, B3, B4, H1, C1A, C2A, F1A, CR1, CR2, M1	Night time Noise monitoring for M1, M2 & M3	Water Quality monitoring for B1, B2, B3, B4, H1, C1A, C2A, F1A, CR1, CR2, M1		Water Quality monitoring for B1, B2, B
	Tidal Period:	Ecology monitoring for Marine Mammals by Vessel-based Line-Transect Survey			Tidal I
	Ebb Tide:10:53 - 18:14		Ebb Tide: 12:09 - 19:12		Ebb Tide: 1
	Flood Tide: 04:37 - 10:53		Flood Tide: 06:11 - 12:09		Flood Tide:
	Monitoring Time:		Monitoring Time:		Monitor
	Mid-ebb: 12:48 - 16:18		Mid-ebb: 13:55 - 17:25		Mid-ebb: 1
	*#Mid-flood: 08:00 - 10:34		*#Mid-flood: 08:00 - 10:55		Mid-flood: (
	Daytime & Evening Noise monitoring for M1, M2 & M3				
7	8	9	10	11	12
	Impact		%Impact		Imp
	Water Quality monitoring for B1, B2, B3, B4, H1, C1A, C2A, F1A, CR1, CR2, M1		Water Quality monitoring for B1, B2, B3, B4, H1, C1A, C2A, F1A, CR1, CR2, M1		Water Quality monitoring for B1, B2, B
	Tidal Period:		Tidal Period:		Tidal I
	Ebb Tide: 05:00 - 13:00		Ebb Tide: 07:00 - 15:00		Ebb Tide: 0
	Flood Tide: 13:00 - 20:00		Flood Tide: 15:00 - 22:00		Flood Tide:
	Monitoring Time:		Monitoring Time:		Monitor
	*#Mid-ebb: 08:00 - 10:45		Mid-ebb: 09:15 - 12:45		Mid-ebb: 1
	Mid-flood: 14:45 - 18:15		&Mid-flood: 15:30 - 19:00		#&Mid-flood:
					^Daytime & Evening Noise r
14	15	16	17	18	19
Impact	15	Impact	17	Impact	Imp
Water Quality monitoring for B1, B2, B3, B4, H1, C1A, C2A, F1A, CR1, CR2, M1		Water Quality monitoring for B1, B2, B3, B4, H1, C1A, C2A, F1A, CR1, CR2, M1		Water Quality monitoring for B1, B2, B3, B4, H1, C1A, C2A, F1A, CR1, CR2, M1	Daytime & Evening Noise m
Tidal Period:		Tidal Period:		Tidal Period:	Daytime & Evening Noise in
Ebb Tide: 10:30 - 17:29		Ebb Tide: 12:04 - 18:27		Ebb Tide: 13:39 - 19:15	
Flood Tide: 04:05 - 10:30		Flood Tide: 05:41 - 12:04		Flood Tide: 07:33 - 13:39	
Monitoring Time:		Monitoring Time:		Monitoring Time:	
Mid-ebb: 12:14 - 15:44		Mid-ebb: 13:30 - 17:00		Mid-ebb: 14:42 - 18:12	
*#\$Mid-flood: 08:00 - 10:10		*#Mid-flood: 08:00 - 10:37		Mid-flood: 08:51 - 12:21	
#JWIG-1000. 08.00 - 10.10		#Wild-1000. 08.00 - 10.57		Wid-1000.00.51 - 12.21	
		44			
21		23	24	25	26
	Impact	Impact	%Impact		Imp
	Water Quality monitoring for B1, B2, B3, B4, H1, C1A, C2A, F1A, CR1, CR2, M1	Night time Noise monitoring for M1, M2 & M3	Water Quality monitoring for B1, B2, B3, B4, H1, C1A, C2A, F1A, CR1, CR2, M1		Water Quality monitoring for B1, B2, B
	Tidal Period:		Tidal Period:		Tidal F
	Ebb Tide: 05:15 - 13:36		Ebb Tide: 06:47 - 14:49		Ebb Tide: 0
	Flood Tide: 13:36 - 23:59		Flood Tide: 14:49 - 22:00		Flood Tide:
	Monitoring Time:		Monitoring Time:		Monitor
	*Mid-ebb: 08:00 - 11:10		Mid-ebb: 09:03 - 12:33		Mid-ebb: 1
	&Mid-flood: 15:30 - 19:00		&Mid-flood: 15:30 - 19:00		#\$&Mid-flood
	Daytime & Evening Noise monitoring for M1, M2 & M3				
28	29	30	31		
	Impact	Impact	Impact		
	Water Quality monitoring for B1, B2, B3, B4, H1, C1A, C2A, F1A, CR1, CR2, M1	Night time Noise monitoring for M1, M2 & M3	Water Quality monitoring for B1, B2, B3, B4, H1, C1A, C2A, F1A, CR1, CR2, M1		
	Tidal Period:		Tidal Period:		
	Ebb Tide: 10:14 - 17:02		Ebb Tide: 11:41 - 17:54		
	Flood Tide: 04:00 - 10:14		Flood Tide: 05:18 - 11:41		
	Monitoring Time:		Monitoring Time:		
	Mid-ebb: 11:53 - 15:23		Mid-ebb: 13:02 - 16:32		
	*#Mid-flood: 08:00 - 09:55		*#Mid-flood: 08:00 - 11:21		
	Daytime & Evening Noise monitoring for M1, M2 & M3				
	Ecology monitoring for WBSE				
					1
		-			

Remarks: 1. Daytime Noise Monitoring (07:00-1900), Evening Time Noise Monitoring (1900-2300), Night Time Noise Monitoring (2300-0700) 2. Water Quality Monitoring for \$1,\$2 and \$3 will only conduct during DCM works, refer to Detailed DCM Plan

Note: \* as per Marine Department Notice No 107 of 2018, all vessels employed for the works should stary in the works area outside the hours of works (0700 to 2300). Due to safty concern, Water Quality Monitoring would start at 0800. # - Prioritize routing: Mid-Ebb: C1-53->CR2->CR1->H1->Remaining stations and Mid-Flood: C2->CR1->S3->CR2->H1->Remaining stations 5 - Since predicted tide is shorter than 3.5 hours, method of 90% tidal period as monitoring time is approached. & - Due to safty concern for sampling event in night-time, method of 90% tidal period as monitoring time is approached. \* - The noise monitoring event on 12813/8/2022 was cancelled due to the emergency operation of Shek Kwu Chau Treatment and Rehabilitation Centre. % - The impact water monitoring event on 10/8/2022 and flood tide on 24/8/2022 was cancelled due to the adverse weather under typhoon.

	Sat
	6
Impact for B1, B2, B3, B4, H1, C1A, C2A, F1A, CR1, CR2, M1 Tidal Period: Ebb Tide: 14:00 - 20:15 Flood Tide: 08:14 - 14:00	
Monitoring Time: Mid-ebb: 15:22 - 18:52 Mid-flood: 09:22 - 12:52	
	12
Impact for B1, B2, B3, B4, H1, C1A, C2A, F1A, CR1, CR2, M1 Tidal Period: Ebb Tide: 08:24 - 16:16 Flood Tide: 16:16 - 23:18 Monitoring Time: Midebb: 10:44 - 14:14 &Mid-flood: 16:37 - 19:00 ning Noise monitoring for M1, M2 & M3	13 Impact ^Night time Noise monitoring for M1, M2 & M3
	20
Impact ing Noise monitoring for M1, M2 & M3	Impact Water Quality monitoring for B1, B2, B3, B4, H1, C1A, C2A, F1A, CR1, CR2, M1 Tidal Period: Ebb Tide: 04:00 - 10:58 Flood Tide: 10:58 - 23:59 Monitoring Time: *#Mid-ebb: 08:00 - 10:37 &Mid-flood: 15:43 - 19:00 Night time Noise monitoring for M1, M2 & M3
	27
Impact for B1, B2, B3, B4, H1, C1A, C2A, F1A, CR1, CR2, M1 Tidal Period: Ebb Tide: 08:09 - 16:00 Flood Tide: 16:00 - 22:26 Monitoring Time: Mid-ebb: 10:19 - 13:49 &Mid-flood: 16:19 - 19:00	

# Appendix D Water Quality Monitoring Data

B1       202         B1       202         B1       202         B2       202         B2       202         B2       202         B2       202         B2       202	0220801 0220801 0220801 0220801 0220801 0220801 0220801 0220801	Sunny Sunny Sunny Sunny Sunny Sunny	Moderate Moderate Moderate Moderate	Mid-Flood Mid-Flood Mid-Flood	Surface Surface	1	09:34						
B1       203         B1       203         B2       203         B2       203         B2       203         B2       203         B2       203	0220801 0220801 0220801 0220801 0220801	Sunny Sunny Sunny	Moderate Moderate	Mid-Flood	Surface			9.62	8.27	30.8	29.41	4.12	4
B1       203         B2       203         B2       203         B2       203         B2       203         B2       203	0220801 0220801 0220801 0220801	Sunny Sunny	Moderate			1	09:34	9.61	8.3	30.77	29.41	4.16	4
B2202B2202B2202	0220801 0220801 0220801	Sunny			Bottom	4.4	09:33	9.72	8.29	30.75	29.31	4.23	3
B2 202 B2 202	0220801 0220801	-		Mid-Flood	Bottom	4.4	09:33	9.71	8.32	30.79	29.41	4.13	3
B2 202	0220801	Suppy	Moderate	Mid-Flood	Surface	1	09:50	8.69	8.39	30.6	29.43	4.71	4
		Sunny	Moderate	Mid-Flood	Surface	1	09:50	8.92	8.31	30.72	29.36	4.94	2.5
B2 20.	1220801	Sunny	Moderate	Mid-Flood	Bottom	3.5	09:49	8.81	8.35	30.59	29.36	5.59	2.5
	1220001	Sunny	Moderate	Mid-Flood	Bottom	3.5	09:49	8.78	8.39	30.52	29.45	5.93	3
B3 202	0220801	Sunny	Moderate	Mid-Flood	Surface	1	10:23	9.08	8.25	31.01	29.55	4.5	3
B3 202	0220801	Sunny	Moderate	Mid-Flood	Surface	1	10:23	9.24	8.32	31.16	29.5	4.06	3
B3 202	0220801	Sunny	Moderate	Mid-Flood	Bottom	3.7	10:22	9.2	8.28	31.09	29.57	4.49	3
B3 202	0220801	Sunny	Moderate	Mid-Flood	Bottom	3.7	10:22	9.21	8.32	31.03	29.53	5.02	3
B4 202	0220801	Sunny	Moderate	Mid-Flood	Surface	1	10:11	8.25	8.24	31.9	29.54	4.76	5
B4 202	0220801	Sunny	Moderate	Mid-Flood	Surface	1	10:11	8.27	8.25	31.93	29.48	5.29	3
B4 202	0220801	Sunny	Moderate	Mid-Flood	Bottom	3.5	10:10	8.25	8.21	32.1	29.54	5.84	2.5
B4 202	0220801	Sunny	Moderate	Mid-Flood	Bottom	3.5	10:10	8.29	8.27	32.05	29.41	5.78	3
C1A 202	0220801	Sunny	Moderate	Mid-Flood	Surface	1	09:06	9.03	8.25	31.27	29.61	4.79	4
C1A 202	0220801	Sunny	Moderate	Mid-Flood	Surface	1	09:06	9.06	8.2	31.29	29.63	4.86	3
C1A 202	0220801	Sunny	Moderate	Mid-Flood	Middle	5.1	09:05	8.97	8.21	31.17	29.7	5.27	3
C1A 202	0220801	Sunny	Moderate	Mid-Flood	Middle	5.1	09:05	9.04	8.21	31.12	29.6	5.07	3
C1A 202	0220801	Sunny	Moderate	Mid-Flood	Bottom	9.2	09:04	9.07	8.23	31.14	29.75	5.87	2.5
C1A 202	0220801	Sunny	Moderate	Mid-Flood	Bottom	9.2	09:04	8.99	8.19	31.24	29.74	6.18	2.5
C2A 202	0220801	Sunny	Moderate	Mid-Flood	Surface	1	08:02	8.82	8.36	30.85	29.6	5.44	2.5
C2A 202	0220801	Sunny	Moderate	Mid-Flood	Surface	1	08:02	8.68	8.28	30.91	29.7	5.19	3
C2A 202	0220801	Sunny	Moderate	Mid-Flood	Middle	5.5	08:01	8.78	8.32	30.8	29.67	6.01	2.5
C2A 202	0220801	Sunny	Moderate	Mid-Flood	Middle	5.5	08:01	8.79	8.29	30.76	29.7	5.7	2.5
C2A 202	0220801	Sunny	Moderate	Mid-Flood	Bottom	10	08:00	8.82	8.32	30.88	29.66	6.47	2.5
C2A 202	0220801	Sunny	Moderate	Mid-Flood	Bottom	10	08:00	8.91	8.34	30.69	29.73	6.2	2.5
	0220801	Sunny	Moderate	Mid-Flood	Surface	1	08:23	8.19	8.32	30.63	29.37	4.37	5
CR1 202	0220801	Sunny	Moderate	Mid-Flood	Surface	1	08:23	8.18	8.27	30.7	29.47	4.33	6
CR1 202	0220801	Sunny	Moderate	Mid-Flood	Middle	6.15	08:22	8.41	8.29	30.69	29.42	5.27	4
CR1 202	0220801	Sunny	Moderate	Mid-Flood	Middle	6.15	08:22	8.18	8.3	30.67	29.36	5.07	4
CR1 202	0220801	Sunny	Moderate	Mid-Flood	Bottom	11.3	08:21	8.39	8.3	30.63	29.37	4.89	5
	0220801	Sunny	Moderate	Mid-Flood	Bottom	11.3	08:21	8.33	8.33	30.65	29.33	5.2	4
	0220801	Sunny	Moderate	Mid-Flood	Surface	1	08:37	9.1	8.19	30.85	29.62	3.45	4
	0220801	Sunny	Moderate	Mid-Flood	Surface	1	08:37	9.09	8.24	31.07	29.53	3.68	3
	0220801	Sunny	Moderate	Mid-Flood	Middle	5.55	08:36	9.06	8.22	30.89	29.54	3.85	3
	0220801	Sunny	Moderate	Mid-Flood	Middle	5.55	08:36	9.01	8.22	30.86	29.56	3.6	2.5
	0220801	Sunny	Moderate	Mid-Flood	Bottom	10.1	08:35	9.1	8.26	30.94	29.62	3.92	5
	0220801	Sunny	Moderate	Mid-Flood	Bottom	10.1	08:35	9.09	8.26	30.97	29.49	3.73	5
	0220801	Sunny	Moderate	Mid-Flood	Surface	1	09:45	9.29	8.35	30.59	29.74	4.34	2.5

Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
F1A	20220801	Sunny	Moderate	Mid-Flood	Surface	1	09:45	9.23	8.29	30.56	29.76	4.52	2.5
F1A	20220801	Sunny	Moderate	Mid-Flood	Middle	3.95	09:44	9.42	8.31	30.64	29.64	4.28	2.5
F1A	20220801	Sunny	Moderate	Mid-Flood	Middle	3.95	09:44	9.42	8.32	30.52	29.76	4.1	2.5
F1A	20220801	Sunny	Moderate	Mid-Flood	Bottom	6.9	09:43	9.21	8.28	30.62	29.66	4.49	2.5
F1A	20220801	Sunny	Moderate	Mid-Flood	Bottom	6.9	09:43	9.37	8.28	30.58	29.72	4.85	2.5
H1	20220801	Sunny	Moderate	Mid-Flood	Surface	1	08:48	8.71	8.23	31.63	29.72	5.06	3
H1	20220801	Sunny	Moderate	Mid-Flood	Surface	1	08:48	8.73	8.18	31.57	29.68	4.5	5
H1	20220801	Sunny	Moderate	Mid-Flood	Middle	4.1	08:47	8.72	8.26	31.76	29.6	4.57	5
H1	20220801	Sunny	Moderate	Mid-Flood	Middle	4.1	08:47	8.66	8.18	31.75	29.72	4.84	4
H1	20220801	Sunny	Moderate	Mid-Flood	Bottom	7.2	08:46	8.56	8.2	31.74	29.67	4.96	4
H1	20220801	Sunny	Moderate	Mid-Flood	Bottom	7.2	08:46	8.73	8.18	31.67	29.62	5	4
M1	20220801	Sunny	Moderate	Mid-Flood	Surface	1	09:10	9.55	8.25	31.16	29.66	5.07	5
M1	20220801	Sunny	Moderate	Mid-Flood	Surface	1	09:10	9.47	8.25	31.21	29.56	4.95	4
M1	20220801	Sunny	Moderate	Mid-Flood	Middle	4.05	09:09	9.5	8.24	31.19	29.57	5.73	4
M1	20220801	Sunny	Moderate	Mid-Flood	Middle	4.05	09:09	9.55	8.19	31.05	29.66	5.2	4
M1	20220801	Sunny	Moderate	Mid-Flood	Bottom	7.1	09:08	9.49	8.22	31.16	29.6	6.19	4
M1	20220801	Sunny	Moderate	Mid-Flood	Bottom	7.1	09:08	9.61	8.19	31.15	29.56	5.33	4
B1	20220801	Sunny	Moderate	Mid-Ebb	Surface	1	13:12	9.31	8.3	31.3	29.45	4.53	4
B1	20220801	Sunny	Moderate	Mid-Ebb	Surface	1	13:12	9.39	8.34	31.17	29.51	4.86	4
B1	20220801	Sunny	Moderate	Mid-Ebb	Bottom	3.6	13:11	9.42	8.33	31.23	29.53	5.44	3
B1	20220801	Sunny	Moderate	Mid-Ebb	Bottom	3.6	13:11	9.32	8.3	31.1	29.46	5.65	4
B2	20220801	Sunny	Moderate	Mid-Ebb	Surface	1	13:25	8.77	8.29	31.67	29.88	4.06	4
B2	20220801	Sunny	Moderate	Mid-Ebb	Surface	1	13:25	8.72	8.22	31.6	29.8	4.34	3
B2	20220801	Sunny	Moderate	Mid-Ebb	Bottom	4.7	13:24	8.75	8.28	31.75	29.74	4.01	4
B2	20220801	Sunny	Moderate	Mid-Ebb	Bottom	4.7	13:24	8.7	8.24	31.49	29.8	4.75	3
В3	20220801	Sunny	Moderate	Mid-Ebb	Surface	1	13:02	8.78	8.16	30.54	29.9	4.47	3
В3	20220801	Sunny	Moderate	Mid-Ebb	Surface	1	13:02	8.84	8.22	30.69	29.92	4.37	3
В3	20220801	Sunny	Moderate	Mid-Ebb	Bottom	4	13:01	8.86	8.17	30.73	29.95	4.12	3
В3	20220801	Sunny	Moderate	Mid-Ebb	Bottom	4	13:01	8.81	8.21	30.62	29.89	4.7	3
B4	20220801	Sunny	Moderate	Mid-Ebb	Surface	1	13:13	9.44	8.23	30.61	29.75	4.02	3
B4	20220801	Sunny	Moderate	Mid-Ebb	Surface	1	13:13	9.33	8.25	30.42	29.8	4.65	2.5
B4	20220801	Sunny	Moderate	Mid-Ebb	Bottom	4	13:12	9.33	8.28	30.5	29.77	4.57	4
B4	20220801	Sunny	Moderate	Mid-Ebb	Bottom	4	13:12	9.33	8.2	30.55	29.74	4.5	3
C1A	20220801	Sunny	Moderate	Mid-Ebb	Surface	1	12:50	8.15	8.17	30.47	29.78	5.71	2.5
C1A	20220801	Sunny	Moderate	Mid-Ebb	Surface	1	12:50	8.24	8.18	30.33	29.78	5.58	2.5
C1A	20220801	Sunny	Moderate	Mid-Ebb	Middle	5.05	12:49	8.11	8.16	30.41	29.86	6.21	6
C1A	20220801	Sunny	Moderate	Mid-Ebb	Middle	5.05	12:49	8.15	8.16	30.62	29.77	6.05	5
C1A	20220801	Sunny	Moderate	Mid-Ebb	Bottom	9.1	12:48	8.2	8.16	30.59	29.86	6.54	5
C1A	20220801	Sunny	Moderate	Mid-Ebb	Bottom	9.1	12:48	8.09	8.16	30.57	29.72	6.35	7
C2A	20220801	Sunny	Moderate	Mid-Ebb	Surface	1	12:50	8.56	8.18	31.52	29.44	4.98	4
C2A	20220801	Sunny	Moderate	Mid-Ebb	Surface	1	12:50	8.62	8.2	31.41	29.37	4.71	4

Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
C2A	20220801	Sunny	Moderate	Mid-Ebb	Middle	6	12:49	8.46	8.17	31.6	29.41	5.2	5
C2A	20220801	Sunny	Moderate	Mid-Ebb	Middle	6	12:49	8.5	8.22	31.44	29.49	5.32	5
C2A	20220801	Sunny	Moderate	Mid-Ebb	Bottom	11	12:48	8.51	8.23	31.59	29.49	5.51	5
C2A	20220801	Sunny	Moderate	Mid-Ebb	Bottom	11	12:48	8.57	8.23	31.55	29.42	5.49	3
CR1	20220801	Sunny	Moderate	Mid-Ebb	Surface	1	14:19	8.78	8.26	30.98	29.5	3.79	3
CR1	20220801	Sunny	Moderate	Mid-Ebb	Surface	1	14:19	8.73	8.3	31.09	29.58	3.68	2.5
CR1	20220801	Sunny	Moderate	Mid-Ebb	Middle	6.9	14:18	8.73	8.3	31.07	29.55	4	3
CR1	20220801	Sunny	Moderate	Mid-Ebb	Middle	6.9	14:18	8.76	8.3	30.75	29.51	4.13	3
CR1	20220801	Sunny	Moderate	Mid-Ebb	Bottom	12.8	14:17	8.75	8.27	30.83	29.5	4.3	2.5
CR1	20220801	Sunny	Moderate	Mid-Ebb	Bottom	12.8	14:17	8.7	8.22	30.98	29.58	4.11	2.5
CR2	20220801	Sunny	Moderate	Mid-Ebb	Surface	1	14:04	8.06	8.36	31.49	29.88	4.21	2.5
CR2	20220801	Sunny	Moderate	Mid-Ebb	Surface	1	14:04	7.97	8.32	31.58	29.78	3.91	2.5
CR2	20220801	Sunny	Moderate	Mid-Ebb	Middle	6.1	14:03	8.08	8.33	31.59	29.8	4.55	2.5
CR2	20220801	Sunny	Moderate	Mid-Ebb	Middle	6.1	14:03	8	8.33	31.55	29.82	4.06	3
CR2	20220801	Sunny	Moderate	Mid-Ebb	Bottom	11.2	14:02	8.1	8.29	31.52	29.83	4.2	3
CR2	20220801	Sunny	Moderate	Mid-Ebb	Bottom	11.2	14:02	8.01	8.36	31.5	29.77	4	3
F1A	20220801	Sunny	Moderate	Mid-Ebb	Surface	1	13:39	9.06	8.23	31.09	29.7	4.21	4
F1A	20220801	Sunny	Moderate	Mid-Ebb	Surface	1	13:39	8.97	8.16	31.01	29.66	4.08	4
F1A	20220801	Sunny	Moderate	Mid-Ebb	Middle	4.15	13:38	9.02	8.24	31.06	29.69	4.26	4
F1A	20220801	Sunny	Moderate	Mid-Ebb	Middle	4.15	13:38	8.96	8.19	30.98	29.66	3.94	4
F1A	20220801	Sunny	Moderate	Mid-Ebb	Bottom	7.3	13:37	8.96	8.23	31.23	29.67	4.4	3
F1A	20220801	Sunny	Moderate	Mid-Ebb	Bottom	7.3	13:37	9	8.23	31.26	29.67	4.64	3
H1	20220801	Sunny	Moderate	Mid-Ebb	Surface	1	13:51	8.95	8.17	30.6	29.68	4.07	2.5
H1	20220801	Sunny	Moderate	Mid-Ebb	Surface	1	13:51	9.02	8.17	30.58	29.76	4.2	2.5
H1	20220801	Sunny	Moderate	Mid-Ebb	Middle	4.3	13:50	9.02	8.17	30.89	29.73	4.34	2.5
H1	20220801	Sunny	Moderate	Mid-Ebb	Middle	4.3	13:50	9.04	8.16	30.68	29.81	3.99	2.5
H1	20220801	Sunny	Moderate	Mid-Ebb	Bottom	7.6	13:49	9.01	8.2	30.87	29.77	4.72	2.5
H1	20220801	Sunny	Moderate	Mid-Ebb	Bottom	7.6	13:49	8.96	8.21	30.82	29.79	4.21	2.5
M1	20220801	Sunny	Moderate	Mid-Ebb	Surface	1	14:03	9.37	8.21	31.77	29.78	4.61	3
M1	20220801	Sunny	Moderate	Mid-Ebb	Surface	1	14:03	9.29	8.16	31.52	29.85	5.13	4
M1	20220801	Sunny	Moderate	Mid-Ebb	Middle	4.4	14:02	9.4	8.22	31.75	29.86	5.55	4
M1	20220801	Sunny	Moderate	Mid-Ebb	Middle	4.4	14:02	9.42	8.19	31.54	29.89	5.62	4
M1	20220801	Sunny	Moderate	Mid-Ebb	Bottom	7.8	14:01	9.37	8.16	31.66	29.84	4.94	2.5
M1	20220801	Sunny	Moderate	Mid-Ebb	Bottom	7.8	14:01	9.37	8.22	31.65	29.79	4.96	2.5
B1	20220803	Cloudy	Moderate	Mid-Flood	Surface	1	09:28	9.44	8.47	29.77	29.34	3.86	<2.5
B1	20220803	Cloudy	Moderate	Mid-Flood	Surface	1	09:28	9.66	8.5	29.93	29.25	3.84	4
B1	20220803	Cloudy	Moderate	Mid-Flood	Bottom	3.9	09:27	9.33	8.42	29.87	29.44	4.11	7
B1	20220803	Cloudy	Moderate	Mid-Flood	Bottom	3.9	09:27	9.69	8.44	30.05	29.34	4.44	6
В2	20220803	Cloudy	Moderate	Mid-Flood	Surface	1	09:45	9.36	8.29	28.15	29.54	4.31	4
B2	20220803	Cloudy	Moderate	Mid-Flood	Surface	1	09:45	9.39	8.28	28.3	29.39	4.55	4
B2	20220803	Cloudy	Moderate	Mid-Flood	Bottom	3.5	09:44	9.04	8.29	28.19	29.5	4.79	5

Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
B2	20220803	Cloudy	Moderate	Mid-Flood	Bottom	3.5	09:44	9.56	8.31	28.25	29.39	4.59	5
B3	20220803	Cloudy	Moderate	Mid-Flood	Surface	1	10:23	9.59	8.4	28.86	29.3	4.86	5
B3	20220803	Cloudy	Moderate	Mid-Flood	Surface	1	10:23	9.04	8.3	28.88	29.11	4.41	6
B3	20220803	Cloudy	Moderate	Mid-Flood	Bottom	3.9	10:22	9.56	8.33	28.76	29.28	5.43	6
B3	20220803	Cloudy	Moderate	Mid-Flood	Bottom	3.9	10:22	9.4	8.34	28.76	29.13	5.38	8
B4	20220803	Cloudy	Moderate	Mid-Flood	Surface	1	10:12	9.6	8.38	29.6	29.66	4.5	8
B4	20220803	Cloudy	Moderate	Mid-Flood	Surface	1	10:12	9.65	8.38	29.58	29.51	4.48	8
B4	20220803	Cloudy	Moderate	Mid-Flood	Bottom	3.7	10:11	9.54	8.42	29.42	29.7	4.82	5
B4	20220803	Cloudy	Moderate	Mid-Flood	Bottom	3.7	10:11	9.65	8.35	29.24	29.68	4.9	3
C1A	20220803	Cloudy	Moderate	Mid-Flood	Surface	1	08:57	9.4	8.13	28.88	29.58	5.5	5
C1A	20220803	Cloudy	Moderate	Mid-Flood	Surface	1	08:57	9.15	8.21	29.24	29.52	5.26	5
C1A	20220803	Cloudy	Moderate	Mid-Flood	Middle	5.25	08:56	9.47	8.18	28.96	29.51	6.14	4
C1A	20220803	Cloudy	Moderate	Mid-Flood	Middle	5.25	08:56	9.44	8.24	29.15	29.51	5.81	5
C1A	20220803	Cloudy	Moderate	Mid-Flood	Bottom	9.5	08:55	9.25	8.21	28.96	29.59	6.25	5
C1A	20220803	Cloudy	Moderate	Mid-Flood	Bottom	9.5	08:55	9.38	8.2	29.07	29.44	6.68	8
C2A	20220803	Cloudy	Moderate	Mid-Flood	Surface	1	08:02	8.48	8.45	27.93	29.61	6.35	7
C2A	20220803	Cloudy	Moderate	Mid-Flood	Surface	1	08:02	8.47	8.47	27.95	29.5	6.22	7
C2A	20220803	Cloudy	Moderate	Mid-Flood	Middle	5.75	08:01	8.45	8.45	27.97	29.44	6.41	3
C2A	20220803	Cloudy	Moderate	Mid-Flood	Middle	5.75	08:01	8.64	8.41	27.94	29.42	6.79	3
C2A	20220803	Cloudy	Moderate	Mid-Flood	Bottom	10.5	08:00	8.33	8.47	28.08	29.62	7.25	4
C2A	20220803	Cloudy	Moderate	Mid-Flood	Bottom	10.5	08:00	8.61	8.38	28.23	29.52	7.08	4
CR1	20220803	Cloudy	Moderate	Mid-Flood	Surface	1	08:24	9.54	8.04	28.31	29.56	3.47	9
CR1	20220803	Cloudy	Moderate	Mid-Flood	Surface	1	08:24	9.51	8.12	28.17	29.39	4.14	7
CR1	20220803	Cloudy	Moderate	Mid-Flood	Middle	6	08:23	9.58	8.1	28.13	29.59	3.79	8
CR1	20220803	Cloudy	Moderate	Mid-Flood	Middle	6	08:23	9.34	8.11	28.03	29.58	4.04	7
CR1	20220803	Cloudy	Moderate	Mid-Flood	Bottom	11	08:22	9.42	8.08	28.32	29.57	4.68	4
CR1	20220803	Cloudy	Moderate	Mid-Flood	Bottom	11	08:22	9.35	8.07	28.25	29.52	4.3	5
CR2	20220803	Cloudy	Moderate	Mid-Flood	Surface	1	08:40	9.32	8.23	28.97	29.49	4.25	5
CR2	20220803	Cloudy	Moderate	Mid-Flood	Surface	1	08:40	9.45	8.24	28.81	29.4	3.68	5
CR2	20220803	Cloudy	Moderate	Mid-Flood	Middle	5.8	08:39	9.19	8.26	28.62	29.45	4.35	5
CR2	20220803	Cloudy	Moderate	Mid-Flood	Middle	5.8	08:39	9.53	8.17	28.87	29.35	4.16	7
CR2	20220803	Cloudy	Moderate	Mid-Flood	Bottom	10.6	08:38	9.3	8.27	28.72	29.49	4.87	6
CR2	20220803	Cloudy	Moderate	Mid-Flood	Bottom	10.6	08:38	9.37	8.2	28.88	29.47	4.63	6
F1A	20220803	Cloudy	Moderate	Mid-Flood	Surface	1	09:46	8.99	8.11	29.27	29.41	4.2	3
F1A	20220803	Cloudy	Moderate	Mid-Flood	Surface	1	09:46	9.25	8.18	29.44	29.31	4.35	5
F1A	20220803	Cloudy	Moderate	Mid-Flood	Middle	4.3	09:45	9.31	8.18	29.34	29.45	4.15	8
F1A	20220803	Cloudy	Moderate	Mid-Flood	Middle	4.3	09:45	9.1	8.11	29.19	29.4	4.6	6
F1A	20220803	Cloudy	Moderate	Mid-Flood	Bottom	7.6	09:44	9.13	8.2	29.44	29.45	4.77	6
F1A	20220803	Cloudy	Moderate	Mid-Flood	Bottom	7.6	09:44	9.33	8.17	29.55	29.44	4.39	5
H1	20220803	Cloudy	Moderate	Mid-Flood	Surface	1	10:14	9.26	8.29	27.62	29.39	3.53	6
H1	20220803	Cloudy	Moderate	Mid-Flood	Surface	1	10:14	9.18	8.31	27.49	29.35	3.51	4

Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
H1	20220803	Cloudy	Moderate	Mid-Flood	Middle	4.05	10:13	8.96	8.28	27.46	29.5	4.06	4
H1	20220803	Cloudy	Moderate	Mid-Flood	Middle	4.05	10:13	8.94	8.28	27.75	29.37	3.82	4
H1	20220803	Cloudy	Moderate	Mid-Flood	Bottom	7.1	10:12	9.18	8.29	27.43	29.56	4.11	8
H1	20220803	Cloudy	Moderate	Mid-Flood	Bottom	7.1	10:12	8.98	8.3	27.56	29.4	3.88	9
M1	20220803	Cloudy	Moderate	Mid-Flood	Surface	1	09:11	7.91	8.33	28.99	29.52	4.22	4
M1	20220803	Cloudy	Moderate	Mid-Flood	Surface	1	09:11	8.02	8.35	29.3	29.49	4.49	6
M1	20220803	Cloudy	Moderate	Mid-Flood	Middle	3.95	09:10	8.13	8.31	29.12	29.65	4.26	8
M1	20220803	Cloudy	Moderate	Mid-Flood	Middle	3.95	09:10	7.95	8.34	29.07	29.49	4.3	6
M1	20220803	Cloudy	Moderate	Mid-Flood	Bottom	6.9	09:09	8.11	8.38	28.94	29.66	5.29	7
M1	20220803	Cloudy	Moderate	Mid-Flood	Bottom	6.9	09:09	8.02	8.33	29.25	29.56	5.47	5
B1	20220803	Cloudy	Moderate	Mid-Ebb	Surface	1	14:22	9.68	8.23	29.17	29.52	4.13	8
B1	20220803	Cloudy	Moderate	Mid-Ebb	Surface	1	14:22	9.68	8.24	29.03	29.62	3.53	11
B1	20220803	Cloudy	Moderate	Mid-Ebb	Bottom	4.2	14:21	9.56	8.19	29.01	29.71	4.66	5
B1	20220803	Cloudy	Moderate	Mid-Ebb	Bottom	4.2	14:21	9.51	8.2	29.23	29.55	4.17	7
B2	20220803	Cloudy	Moderate	Mid-Ebb	Surface	1	14:38	8.54	8.26	28.65	29.65	4.88	8
B2	20220803	Cloudy	Moderate	Mid-Ebb	Surface	1	14:38	8.47	8.18	28.67	29.7	5.09	4
B2	20220803	Cloudy	Moderate	Mid-Ebb	Bottom	4.6	14:37	8.49	8.18	28.61	29.62	4.66	3
B2	20220803	Cloudy	Moderate	Mid-Ebb	Bottom	4.6	14:37	8.46	8.23	28.79	29.71	4.52	3
В3	20220803	Cloudy	Moderate	Mid-Ebb	Surface	1	14:09	9.5	8.34	27.81	29.28	7.41	5
B3	20220803	Cloudy	Moderate	Mid-Ebb	Surface	1	14:09	9.73	8.4	27.87	29.36	7.6	6
В3	20220803	Cloudy	Moderate	Mid-Ebb	Bottom	4.4	14:08	9.76	8.36	27.82	29.39	7.66	6
В3	20220803	Cloudy	Moderate	Mid-Ebb	Bottom	4.4	14:08	9.69	8.4	27.92	29.21	7.86	4
B4	20220803	Cloudy	Moderate	Mid-Ebb	Surface	1	14:20	8.71	8.28	27.93	29.62	6.34	4
B4	20220803	Cloudy	Moderate	Mid-Ebb	Surface	1	14:20	8.93	8.35	27.97	29.47	6.34	7
B4	20220803	Cloudy	Moderate	Mid-Ebb	Bottom	3.1	14:19	8.92	8.35	27.77	29.61	6.88	8
B4	20220803	Cloudy	Moderate	Mid-Ebb	Bottom	3.1	14:19	8.97	8.39	27.63	29.52	6.72	5
C1A	20220803	Cloudy	Moderate	Mid-Ebb	Surface	1	13:57	9.37	8.34	28.83	29.3	7.39	4
C1A	20220803	Cloudy	Moderate	Mid-Ebb	Surface	1	13:57	9.3	8.26	29.17	29.26	7.58	7
C1A	20220803	Cloudy	Moderate	Mid-Ebb	Middle	4.85	13:56	9.25	8.37	29.15	29.33	7.86	9
C1A	20220803	Cloudy	Moderate	Mid-Ebb	Middle	4.85	13:56	9.43	8.37	28.9	29.33	7.9	8
C1A	20220803	Cloudy	Moderate	Mid-Ebb	Bottom	8.7	13:55	9.34	8.34	29.01	29.21	8.21	4
C1A	20220803	Cloudy	Moderate	Mid-Ebb	Bottom	8.7	13:55	9.18	8.37	28.84	29.29	7.98	5
C2A	20220803	Cloudy	Moderate	Mid-Ebb	Surface	1	13:57	8.89	8.29	27.89	29.55	7.9	9
C2A	20220803	Cloudy	Moderate	Mid-Ebb	Surface	1	13:57	8.62	8.17	28.01	29.44	7.78	7
C2A	20220803	Cloudy	Moderate	Mid-Ebb	Middle	5.75	13:56	8.95	8.27	28.15	29.38	8.24	7
C2A	20220803	Cloudy	Moderate	Mid-Ebb	Middle	5.75	13:56	8.65	8.29	28	29.55	8.33	5
C2A	20220803	, Cloudy	Moderate	Mid-Ebb	Bottom	10.5	13:55	8.83	8.2	28.11	29.54	8.68	17
C2A	20220803	Cloudy	Moderate	Mid-Ebb	Bottom	10.5	13:55	8.85	8.18	28.22	29.37	8.23	18
CR1	20220803	, Cloudy	Moderate	Mid-Ebb	Surface	1	15:32	8.68	8.22	27.9	29.3	5.23	17
CR1	20220803	Cloudy	Moderate	Mid-Ebb	Surface	1	15:32	8.43	8.34	27.98	29.34	4.84	16
CR1	20220803	Cloudy	Moderate	Mid-Ebb	Middle	6.45	15:31	8.61	8.29	28.04	29.35	5.12	9

Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
CR1	20220803	Cloudy	Moderate	Mid-Ebb	Middle	6.45	15:31	8.58	8.3	28.21	29.38	5.87	8
CR1	20220803	Cloudy	Moderate	Mid-Ebb	Bottom	11.9	15:30	8.67	8.22	28	29.37	5.32	9
CR1	20220803	Cloudy	Moderate	Mid-Ebb	Bottom	11.9	15:30	8.72	8.3	28.04	29.39	5.76	6
CR2	20220803	Cloudy	Moderate	Mid-Ebb	Surface	1	15:18	9.6	8.24	28.01	29.52	5.49	8
CR2	20220803	Cloudy	Moderate	Mid-Ebb	Surface	1	15:18	9.35	8.28	28.13	29.68	5.1	10
CR2	20220803	Cloudy	Moderate	Mid-Ebb	Middle	5.4	15:17	9.37	8.32	28.04	29.57	5.15	7
CR2	20220803	Cloudy	Moderate	Mid-Ebb	Middle	5.4	15:17	9.34	8.27	28	29.52	5.62	5
CR2	20220803	Cloudy	Moderate	Mid-Ebb	Bottom	9.8	15:16	9.44	8.32	27.96	29.55	5.49	6
CR2	20220803	Cloudy	Moderate	Mid-Ebb	Bottom	9.8	15:16	9.31	8.25	28.08	29.61	5.96	6
F1A	20220803	Cloudy	Moderate	Mid-Ebb	Surface	1	14:45	9.64	8.23	27.99	29.55	7.07	8
F1A	20220803	Cloudy	Moderate	Mid-Ebb	Surface	1	14:45	9.59	8.2	28.08	29.53	7.04	6
F1A	20220803	Cloudy	Moderate	Mid-Ebb	Middle	4.15	14:44	9.57	8.2	27.94	29.7	7.33	8
F1A	20220803	Cloudy	Moderate	Mid-Ebb	Middle	4.15	14:44	9.61	8.23	28.2	29.68	6.69	10
F1A	20220803	Cloudy	Moderate	Mid-Ebb	Bottom	7.3	14:43	9.52	8.22	28.04	29.63	7.42	14
F1A	20220803	Cloudy	Moderate	Mid-Ebb	Bottom	7.3	14:43	9.36	8.22	28.11	29.6	8.07	10
H1	20220803	Cloudy	Moderate	Mid-Ebb	Surface	1	15:04	8.21	8.37	28.44	29.48	7.17	5
H1	20220803	Cloudy	Moderate	Mid-Ebb	Surface	1	15:04	8.38	8.37	28.64	29.6	6.96	4
H1	20220803	Cloudy	Moderate	Mid-Ebb	Middle	4.2	15:03	8.18	8.4	28.74	29.65	7.18	4
H1	20220803	Cloudy	Moderate	Mid-Ebb	Middle	4.2	15:03	8.33	8.43	28.57	29.48	7.54	7
H1	20220803	Cloudy	Moderate	Mid-Ebb	Bottom	7.4	15:02	8.45	8.35	28.53	29.63	7.83	4
H1	20220803	Cloudy	Moderate	Mid-Ebb	Bottom	7.4	15:02	8.18	8.35	28.59	29.64	7.84	6
M1	20220803	Cloudy	Moderate	Mid-Ebb	Surface	1	15:08	8.42	8.19	28.58	29.51	6.5	8
M1	20220803	Cloudy	Moderate	Mid-Ebb	Surface	1	15:08	8.45	8.25	28.51	29.41	6.59	9
M1	20220803	Cloudy	Moderate	Mid-Ebb	Middle	4.7	15:07	8.45	8.27	28.31	29.37	7.44	6
M1	20220803	Cloudy	Moderate	Mid-Ebb	Middle	4.7	15:07	8.22	8.18	28.61	29.48	6.57	7
M1	20220803	Cloudy	Moderate	Mid-Ebb	Bottom	8.4	15:06	8.41	8.26	28.59	29.32	7.42	6
M1	20220803	Cloudy	Moderate	Mid-Ebb	Bottom	8.4	15:06	8.31	8.24	28.41	29.34	7.61	7
B1	20220805	Cloudy	Moderate	Mid-Flood	Surface	1	10:43	8.72	8.3	31.96	28.77	3.15	2.5
B1	20220805	Cloudy	Moderate	Mid-Flood	Surface	1	10:43	8.72	8.26	31.99	28.93	2.93	2.5
B1	20220805	Cloudy	Moderate	Mid-Flood	Bottom	4.1	10:42	8.62	8.31	31.83	28.83	3.16	2.5
B1	20220805	Cloudy	Moderate	Mid-Flood	Bottom	4.1	10:42	8.59	8.27	31.87	28.95	2.97	3
B2	20220805	Cloudy	Moderate	Mid-Flood	Surface	1	11:00	8.99	8.31	31.51	28.79	3.31	3
B2	20220805	Cloudy	Moderate	Mid-Flood	Surface	1	11:00	8.79	8.3	31.52	28.69	2.98	3
B2	20220805	Cloudy	Moderate	Mid-Flood	Bottom	4.2	10:59	8.9	8.24	31.5	28.79	3.57	2.5
B2	20220805	Cloudy	Moderate	Mid-Flood	Bottom	4.2	10:59	8.82	8.24	31.37	28.67	3.44	3
B3	20220805	Cloudy	Moderate	Mid-Flood	Surface	1	11:27	9.44	8.4	32.04	29	3.12	3
B3	20220805	Cloudy	Moderate	Mid-Flood	Surface	1	11:27	9.4	8.41	32.12	28.96	3.18	4
B3	20220805	Cloudy	Moderate	Mid-Flood	Bottom	4.3	11:26	9.56	8.37	32.12	29	4.14	3
B3	20220805	Cloudy	Moderate	Mid-Flood	Bottom	4.3	11:26	9.53	8.4	32.13	28.84	4.22	4
B4	20220805	Cloudy	Moderate	Mid-Flood	Surface	1	11:16	8.96	8.33	31.39	28.91	3.59	4
B4	20220805	Cloudy	Moderate	Mid-Flood	Surface	1	11:16	9	8.32	31.47	28.9	3.74	3

Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
B4	20220805	Cloudy	Moderate	Mid-Flood	Bottom	3.9	11:15	8.95	8.28	31.45	29.04	4.29	3
B4	20220805	Cloudy	Moderate	Mid-Flood	Bottom	3.9	11:15	8.81	8.27	31.46	29.07	3.92	3
C1A	20220805	Cloudy	Moderate	Mid-Flood	Surface	1	10:14	9.03	8.2	31.86	28.72	3.66	3
C1A	20220805	Cloudy	Moderate	Mid-Flood	Surface	1	10:14	8.99	8.28	31.86	28.74	3.53	3
C1A	20220805	Cloudy	Moderate	Mid-Flood	Middle	5.4	10:13	9.17	8.23	31.7	28.6	3.83	4
C1A	20220805	Cloudy	Moderate	Mid-Flood	Middle	5.4	10:13	9.13	8.21	31.73	28.76	3.84	4
C1A	20220805	Cloudy	Moderate	Mid-Flood	Bottom	9.8	10:12	9.1	8.2	31.83	28.61	4.17	3
C1A	20220805	Cloudy	Moderate	Mid-Flood	Bottom	9.8	10:12	9.18	8.27	31.76	28.6	4.32	5
C2A	20220805	Cloudy	Moderate	Mid-Flood	Surface	1	09:25	8.4	8.2	31.54	28.83	4.38	3
C2A	20220805	Cloudy	Moderate	Mid-Flood	Surface	1	09:25	8.36	8.21	31.62	28.86	4.31	4
C2A	20220805	Cloudy	Moderate	Mid-Flood	Middle	6	09:24	8.5	8.22	31.62	28.75	4.64	4
C2A	20220805	Cloudy	Moderate	Mid-Flood	Middle	6	09:24	8.55	8.19	31.6	28.82	4.56	5
C2A	20220805	Cloudy	Moderate	Mid-Flood	Bottom	11	09:23	8.49	8.22	31.6	28.72	4.85	5
C2A	20220805	Cloudy	Moderate	Mid-Flood	Bottom	11	09:23	8.51	8.21	31.5	28.7	4.93	6
CR1	20220805	Cloudy	Moderate	Mid-Flood	Surface	1	09:40	9.03	8.25	31.94	28.63	2.63	4
CR1	20220805	Cloudy	Moderate	Mid-Flood	Surface	1	09:40	8.97	8.22	31.83	28.71	2.75	5
CR1	20220805	Cloudy	Moderate	Mid-Flood	Middle	6.25	09:39	9.08	8.22	31.83	28.69	3.12	5
CR1	20220805	Cloudy	Moderate	Mid-Flood	Middle	6.25	09:39	9	8.24	31.95	28.76	3.13	4
CR1	20220805	Cloudy	Moderate	Mid-Flood	Bottom	11.5	09:38	9.1	8.29	31.88	28.61	3.57	3
CR1	20220805	Cloudy	Moderate	Mid-Flood	Bottom	11.5	09:38	9.05	8.29	31.98	28.61	3.99	5
CR2	20220805	Cloudy	Moderate	Mid-Flood	Surface	1	09:57	8.51	8.3	30.94	28.89	2.72	4
CR2	20220805	Cloudy	Moderate	Mid-Flood	Surface	1	09:57	8.46	8.3	30.97	29.04	2.95	4
CR2	20220805	Cloudy	Moderate	Mid-Flood	Middle	5.9	09:56	8.43	8.31	31.01	28.91	2.99	3
CR2	20220805	Cloudy	Moderate	Mid-Flood	Middle	5.9	09:56	8.37	8.37	31.06	28.99	3.5	2.5
CR2	20220805	Cloudy	Moderate	Mid-Flood	Bottom	10.8	09:55	8.37	8.31	30.93	28.97	3.46	4
CR2	20220805	Cloudy	Moderate	Mid-Flood	Bottom	10.8	09:55	8.45	8.32	31.05	29.03	3.34	5
F1A	20220805	Cloudy	Moderate	Mid-Flood	Surface	1	10:50	8.81	8.3	32.13	28.99	2.71	3
F1A	20220805	Cloudy	Moderate	Mid-Flood	Surface	1	10:50	8.77	8.35	32.06	29.03	3.12	5
F1A	20220805	Cloudy	Moderate	Mid-Flood	Middle	4.35	10:49	8.76	8.38	32.04	28.89	3.76	5
F1A	20220805	Cloudy	Moderate	Mid-Flood	Middle	4.35	10:49	8.81	8.33	32.16	28.89	3.3	3
F1A	20220805	Cloudy	Moderate	Mid-Flood	Bottom	7.7	10:48	8.78	8.38	31.98	29.04	3.66	5
F1A	20220805	Cloudy	Moderate	Mid-Flood	Bottom	7.7	10:48	8.77	8.33	32.06	28.92	3.72	5
H1	20220805	Cloudy	Moderate	Mid-Flood	Surface	1	11:28	8.42	8.23	31.23	28.81	3.49	4
H1	20220805	Cloudy	Moderate	Mid-Flood	Surface	1	11:28	8.32	8.2	31.11	28.95	3.49	3
H1	20220805	Cloudy	Moderate	Mid-Flood	Middle	4.05	11:27	8.46	8.24	31.16	28.95	3.94	4
H1	20220805	Cloudy	Moderate	Mid-Flood	Middle	4.05	11:27	8.33	8.19	31.12	29	3.78	5
H1	20220805	Cloudy	Moderate	Mid-Flood	Bottom	7.1	11:26	8.31	8.2	31.1	28.98	3.61	5
H1	20220805	Cloudy	Moderate	Mid-Flood	Bottom	7.1	11:26	8.31	8.22	31.1	28.81	3.74	4
M1	20220805	Cloudy	Moderate	Mid-Flood	Surface	1	10:26	8.5	8.27	31.09	28.94	3.41	6
M1	20220805	Cloudy	Moderate	Mid-Flood	Surface	1	10:26	8.67	8.28	31.23	28.9	3.36	4
M1	20220805	Cloudy	Moderate	Mid-Flood	Middle	3.8	10:25	8.67	8.25	31.1	28.88	3.69	3

Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
M1	20220805	Cloudy	Moderate	Mid-Flood	Middle	3.8	10:25	8.61	8.26	31.2	28.88	3.35	3
M1	20220805	Cloudy	Moderate	Mid-Flood	Bottom	6.6	10:24	8.66	8.28	31.08	28.87	4.25	5
M1	20220805	Cloudy	Moderate	Mid-Flood	Bottom	6.6	10:24	8.61	8.24	31.2	28.91	4.18	6
B1	20220805	Cloudy	Moderate	Mid-Ebb	Surface	1	15:44	9.45	8.2	31.85	28.98	2.77	4
B1	20220805	Cloudy	Moderate	Mid-Ebb	Surface	1	15:44	9.61	8.2	31.78	28.83	3.26	4
B1	20220805	Cloudy	Moderate	Mid-Ebb	Bottom	3.9	15:43	9.48	8.22	31.76	29	3.11	4
B1	20220805	Cloudy	Moderate	Mid-Ebb	Bottom	3.9	15:43	9.59	8.21	31.77	28.95	3.53	6
B2	20220805	Cloudy	Moderate	Mid-Ebb	Surface	1	15:59	9.31	8.28	31.56	28.59	2.49	3
B2	20220805	Cloudy	Moderate	Mid-Ebb	Surface	1	15:59	9.34	8.29	31.65	28.56	2.17	3
B2	20220805	Cloudy	Moderate	Mid-Ebb	Bottom	4.8	15:58	9.21	8.26	31.73	28.67	2.86	6
B2	20220805	Cloudy	Moderate	Mid-Ebb	Bottom	4.8	15:58	9.27	8.3	31.71	28.54	3.16	4
B3	20220805	Cloudy	Moderate	Mid-Ebb	Surface	1	15:36	9.36	8.19	30.8	28.66	3.63	9
B3	20220805	Cloudy	Moderate	Mid-Ebb	Surface	1	15:36	9.38	8.19	30.81	28.7	3.58	10
B3	20220805	Cloudy	Moderate	Mid-Ebb	Bottom	4.3	15:35	9.51	8.19	30.93	28.73	4.11	4
B3	20220805	Cloudy	Moderate	Mid-Ebb	Bottom	4.3	15:35	9.35	8.18	31.02	28.71	3.56	5
B4	20220805	Cloudy	Moderate	Mid-Ebb	Surface	1	15:43	8.81	8.29	31.36	28.67	3.62	4
B4	20220805	Cloudy	Moderate	Mid-Ebb	Surface	1	15:43	8.76	8.31	31.56	28.7	3.44	4
B4	20220805	Cloudy	Moderate	Mid-Ebb	Bottom	3.3	15:42	8.8	8.34	31.47	28.57	4.06	6
B4	20220805	Cloudy	Moderate	Mid-Ebb	Bottom	3.3	15:42	8.79	8.29	31.51	28.62	3.85	5
C1A	20220805	Cloudy	Moderate	Mid-Ebb	Surface	1	15:24	8.34	8.19	31.27	28.52	4.89	7
C1A	20220805	Cloudy	Moderate	Mid-Ebb	Surface	1	15:24	8.29	8.18	31.25	28.55	5.12	6
C1A	20220805	Cloudy	Moderate	Mid-Ebb	Middle	4.9	15:23	8.32	8.19	31.23	28.52	5.43	4
C1A	20220805	Cloudy	Moderate	Mid-Ebb	Middle	4.9	15:23	8.48	8.2	31.41	28.58	5.21	4
C1A	20220805	Cloudy	Moderate	Mid-Ebb	Bottom	8.8	15:22	8.47	8.19	31.42	28.48	5.67	5
C1A	20220805	Cloudy	Moderate	Mid-Ebb	Bottom	8.8	15:22	8.34	8.22	31.31	28.49	5.76	3
C2A	20220805	Cloudy	Moderate	Mid-Ebb	Surface	1	15:24	9.51	8.29	30.94	28.78	4.06	6
C2A	20220805	Cloudy	Moderate	Mid-Ebb	Surface	1	15:24	9.39	8.28	30.73	28.74	3.69	7
C2A	20220805	Cloudy	Moderate	Mid-Ebb	Middle	5.95	15:23	9.38	8.32	30.78	28.89	4.12	5
C2A	20220805	Cloudy	Moderate	Mid-Ebb	Middle	5.95	15:23	9.41	8.31	30.8	28.71	4.32	7
C2A	20220805	Cloudy	Moderate	Mid-Ebb	Bottom	10.9	15:22	9.45	8.29	30.87	28.78	5.07	5
C2A	20220805	Cloudy	Moderate	Mid-Ebb	Bottom	10.9	15:22	9.39	8.3	30.81	28.89	4.68	6
CR1	20220805	Cloudy	Moderate	Mid-Ebb	Surface	1	16:52	9.25	8.2	31.31	28.91	3.2	6
CR1	20220805	Cloudy	Moderate	Mid-Ebb	Surface	1	16:52	9.27	8.21	31.07	28.89	3.02	4
CR1	20220805	Cloudy	Moderate	Mid-Ebb	Middle	6.9	16:51	9.27	8.19	31.26	28.95	3.21	4
CR1	20220805	Cloudy	Moderate	Mid-Ebb	Middle	6.9	16:51	9.29	8.21	31.12	28.86	3.04	5
CR1	20220805	Cloudy	Moderate	Mid-Ebb	Bottom	12.8	16:50	9.38	8.19	31.15	28.93	3.08	8
CR1	20220805	Cloudy	Moderate	Mid-Ebb	Bottom	12.8	16:50	9.35	8.21	31.06	29	2.9	5
CR2	20220805	Cloudy	Moderate	Mid-Ebb	Surface	1	16:38	9.18	8.3	31.36	28.74	3.26	6
CR2	20220805	Cloudy	Moderate	Mid-Ebb	Surface	1	16:38	9.12	8.34	31.31	28.68	3.31	6
CR2	20220805	Cloudy	Moderate	Mid-Ebb	Middle	6	16:37	9.19	8.28	31.35	28.69	2.9	4
CR2	20220805	Cloudy	Moderate	Mid-Ebb	Middle	6	16:37	9.06	8.31	31.4	28.65	2.88	8

Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
CR2	20220805	Cloudy	Moderate	Mid-Ebb	Bottom	11	16:36	9.17	8.31	31.22	28.74	3.39	7
CR2	20220805	Cloudy	Moderate	Mid-Ebb	Bottom	11	16:36	9.14	8.32	31.4	28.77	3.22	7
F1A	20220805	Cloudy	Moderate	Mid-Ebb	Surface	1	16:11	9.49	8.3	30.92	28.88	3.49	5
F1A	20220805	Cloudy	Moderate	Mid-Ebb	Surface	1	16:11	9.5	8.29	30.93	28.83	3.87	6
F1A	20220805	Cloudy	Moderate	Mid-Ebb	Middle	4	16:10	9.56	8.25	30.94	28.8	3.75	6
F1A	20220805	Cloudy	Moderate	Mid-Ebb	Middle	4	16:10	9.47	8.25	31.08	28.81	3.64	5
F1A	20220805	Cloudy	Moderate	Mid-Ebb	Bottom	7	16:09	9.53	8.28	31.13	28.73	4.35	5
F1A	20220805	Cloudy	Moderate	Mid-Ebb	Bottom	7	16:09	9.51	8.27	31.09	28.84	4.25	5
H1	20220805	Cloudy	Moderate	Mid-Ebb	Surface	1	16:24	9.37	8.32	31.7	29.05	2.49	6
H1	20220805	Cloudy	Moderate	Mid-Ebb	Surface	1	16:24	9.22	8.32	31.7	28.95	2.46	9
H1	20220805	Cloudy	Moderate	Mid-Ebb	Middle	3.9	16:23	9.39	8.31	31.97	28.97	3.34	5
H1	20220805	Cloudy	Moderate	Mid-Ebb	Middle	3.9	16:23	9.3	8.31	31.93	29.06	2.85	6
H1	20220805	Cloudy	Moderate	Mid-Ebb	Bottom	6.8	16:22	9.32	8.35	31.81	29.04	3.3	5
H1	20220805	Cloudy	Moderate	Mid-Ebb	Bottom	6.8	16:22	9.23	8.33	31.94	29.03	3.25	5
M1	20220805	Cloudy	Moderate	Mid-Ebb	Surface	1	16:35	9.17	8.18	31.15	28.64	2.52	5
M1	20220805	Cloudy	Moderate	Mid-Ebb	Surface	1	16:35	9.22	8.24	31.21	28.75	2.55	7
M1	20220805	Cloudy	Moderate	Mid-Ebb	Middle	4.4	16:34	9.1	8.2	31.19	28.69	3.03	5
M1	20220805	Cloudy	Moderate	Mid-Ebb	Middle	4.4	16:34	9.11	8.23	31.29	28.77	2.79	7
M1	20220805	Cloudy	Moderate	Mid-Ebb	Bottom	7.8	16:33	9.23	8.21	31.13	28.76	3.03	6
M1	20220805	Cloudy	Moderate	Mid-Ebb	Bottom	7.8	16:33	9.25	8.22	31.27	28.74	3.41	8
B1	20220808	Cloudy	Moderate	Mid-Ebb	Surface	1	08:53	9.03	8.31	32.41	28.81	3.13	4
B1	20220808	Cloudy	Moderate	Mid-Ebb	Surface	1	08:53	8.86	8.31	32.22	28.76	3.37	4
B1	20220808	Cloudy	Moderate	Mid-Ebb	Bottom	3.8	08:52	8.94	8.32	32.22	28.68	3.53	3
B1	20220808	Cloudy	Moderate	Mid-Ebb	Bottom	3.8	08:52	8.87	8.33	32.27	28.7	3.39	3
B2	20220808	Cloudy	Moderate	Mid-Ebb	Surface	1	09:11	9.17	8.18	31.23	28.48	3.7	4
B2	20220808	Cloudy	Moderate	Mid-Ebb	Surface	1	09:11	9.21	8.15	31.15	28.64	3.44	4
B2	20220808	Cloudy	Moderate	Mid-Ebb	Bottom	4.7	09:10	9.16	8.16	31.11	28.47	4.04	4
B2	20220808	Cloudy	Moderate	Mid-Ebb	Bottom	4.7	09:10	9.25	8.17	31.16	28.59	3.82	3
B3	20220808	Cloudy	Moderate	Mid-Ebb	Surface	1	10:56	8.57	8.22	32.39	28.75	4.25	4
B3	20220808	Cloudy	Moderate	Mid-Ebb	Surface	1	10:56	8.45	8.2	32.33	28.63	4.25	5
B3	20220808	Cloudy	Moderate	Mid-Ebb	Bottom	4.3	10:55	8.61	8.23	32.14	28.74	4.9	5
В3	20220808	Cloudy	Moderate	Mid-Ebb	Bottom	4.3	10:55	8.52	8.21	32.26	28.65	5.13	4
B4	20220808	Cloudy	Moderate	Mid-Ebb	Surface	1	10:43	8.8	8.3	31.78	28.59	5.06	5
B4	20220808	Cloudy	Moderate	Mid-Ebb	Surface	1	10:43	8.9	8.28	31.65	28.62	4.61	5
B4	20220808	Cloudy	Moderate	Mid-Ebb	Bottom	3.4	10:42	8.72	8.3	31.84	28.62	4.74	6
B4	20220808	Cloudy	Moderate	Mid-Ebb	Bottom	3.4	10:42	8.83	8.31	31.73	28.6	4.63	4
C1A	20220808	Cloudy	Moderate	Mid-Ebb	Surface	1	08:22	8.4	8.24	32.13	28.53	6.09	3
C1A	20220808	Cloudy	Moderate	Mid-Ebb	Surface	1	08:22	8.37	8.22	32.16	28.51	6.31	4
C1A	20220808	Cloudy	Moderate	Mid-Ebb	Middle	5.2	08:21	8.3	8.25	32.13	28.39	6.75	5
C1A	20220808	Cloudy	Moderate	Mid-Ebb	Middle	5.2	08:21	8.36	8.25	32.1	28.44	6.47	8
C1A	20220808	Cloudy	Moderate	Mid-Ebb	Bottom	9.4	08:20	8.34	8.22	32.14	28.55	6.99	6

Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
C1A	20220808	Cloudy	Moderate	Mid-Ebb	Bottom	9.4	08:20	8.29	8.25	32.24	28.54	7.16	5
C2A	20220808	Cloudy	Moderate	Mid-Ebb	Surface	1	10:28	8.83	8.3	31.47	28.76	5.51	6
C2A	20220808	Cloudy	Moderate	Mid-Ebb	Surface	1	10:28	8.97	8.28	31.28	28.62	5.64	5
C2A	20220808	Cloudy	Moderate	Mid-Ebb	Middle	5.9	10:27	9	8.31	31.27	28.69	6.1	6
C2A	20220808	Cloudy	Moderate	Mid-Ebb	Middle	5.9	10:27	9.02	8.32	31.29	28.7	5.83	9
C2A	20220808	Cloudy	Moderate	Mid-Ebb	Bottom	10.8	10:26	8.98	8.28	31.21	28.76	6.42	6
C2A	20220808	Cloudy	Moderate	Mid-Ebb	Bottom	10.8	10:26	9.02	8.29	31.35	28.71	6.58	6
CR1	20220808	Cloudy	Moderate	Mid-Ebb	Surface	1	10:08	8.39	8.17	32.23	28.93	4.18	7
CR1	20220808	Cloudy	Moderate	Mid-Ebb	Surface	1	10:08	8.44	8.13	32.24	28.88	3.74	9
CR1	20220808	Cloudy	Moderate	Mid-Ebb	Middle	6.5	10:07	8.32	8.18	32.1	28.89	4.31	8
CR1	20220808	Cloudy	Moderate	Mid-Ebb	Middle	6.5	10:07	8.32	8.16	32.29	28.96	4.93	9
CR1	20220808	Cloudy	Moderate	Mid-Ebb	Bottom	12	10:06	8.46	8.14	32.02	28.91	4.87	6
CR1	20220808	Cloudy	Moderate	Mid-Ebb	Bottom	12	10:06	8.34	8.15	32.21	28.75	4.74	5
CR2	20220808	Cloudy	Moderate	Mid-Ebb	Surface	1	09:53	9.15	8.23	31.69	28.64	4.3	9
CR2	20220808	Cloudy	Moderate	Mid-Ebb	Surface	1	09:53	8.96	8.23	31.47	28.66	4.49	6
CR2	20220808	Cloudy	Moderate	Mid-Ebb	Middle	6.05	09:52	8.99	8.17	31.59	28.71	4.58	6
CR2	20220808	Cloudy	Moderate	Mid-Ebb	Middle	6.05	09:52	9.03	8.23	31.47	28.75	4.3	6
CR2	20220808	Cloudy	Moderate	Mid-Ebb	Bottom	11.1	09:51	9.09	8.19	31.61	28.71	4.16	6
CR2	20220808	Cloudy	Moderate	Mid-Ebb	Bottom	11.1	09:51	8.99	8.22	31.44	28.66	3.95	5
F1A	20220808	Cloudy	Moderate	Mid-Ebb	Surface	1	10:20	8.81	8.28	30.96	28.37	4.51	9
F1A	20220808	Cloudy	Moderate	Mid-Ebb	Surface	1	10:20	8.59	8.27	30.77	28.56	4.46	8
F1A	20220808	Cloudy	Moderate	Mid-Ebb	Middle	4.05	10:19	8.72	8.28	30.8	28.37	4.22	10
F1A	20220808	Cloudy	Moderate	Mid-Ebb	Middle	4.05	10:19	8.7	8.28	30.75	28.42	4.73	10
F1A	20220808	Cloudy	Moderate	Mid-Ebb	Bottom	7.1	10:18	8.66	8.32	30.97	28.5	4.89	7
F1A	20220808	Cloudy	Moderate	Mid-Ebb	Bottom	7.1	10:18	8.69	8.29	30.87	28.36	4.45	8
H1	20220808	Cloudy	Moderate	Mid-Ebb	Surface	1	09:37	9.25	8.23	32.12	28.37	3.86	4
H1	20220808	Cloudy	Moderate	Mid-Ebb	Surface	1	09:37	9.29	8.24	32.07	28.55	3.82	5
H1	20220808	Cloudy	Moderate	Mid-Ebb	Middle	4.05	09:36	9.12	8.18	32.07	28.55	4.42	4
H1	20220808	Cloudy	Moderate	Mid-Ebb	Middle	4.05	09:36	9.16	8.23	32.06	28.39	4.29	4
H1	20220808	Cloudy	Moderate	Mid-Ebb	Bottom	7.1	09:35	9.14	8.24	31.99	28.54	4.68	5
H1	20220808	Cloudy	Moderate	Mid-Ebb	Bottom	7.1	09:35	9.31	8.17	32.16	28.54	5.47	5
M1	20220808	Cloudy	Moderate	Mid-Ebb	Surface	1	09:54	9.22	8.16	31.1	28.54	5.2	6
M1	20220808	Cloudy	Moderate	Mid-Ebb	Surface	1	09:54	9.33	8.14	31.31	28.5	5.41	9
M1	20220808	Cloudy	Moderate	Mid-Ebb	Middle	4.9	09:53	9.41	8.14	31.34	28.5	5.02	7
M1	20220808	Cloudy	Moderate	Mid-Ebb	Middle	4.9	09:53	9.25	8.14	31.12	28.65	5.06	7
M1	20220808	Cloudy	Moderate	Mid-Ebb	Bottom	8.8	09:52	9.08	8.17	31.28	28.66	5.4	6
M1	20220808	Cloudy	Moderate	Mid-Ebb	Bottom	8.8	09:52	9.02	8.17	31.3	28.64	5.93	7
B1	20220808	Cloudy	Moderate	Mid-Flood	Surface	1	15:08	8.41	8.19	31.2	28.57	3.24	11
B1	20220808	Cloudy	Moderate	Mid-Flood	Surface	1	15:08	8.48	8.19	31.45	28.54	3.67	10
B1	20220808	Cloudy	Moderate	Mid-Flood	Bottom	4.3	15:07	8.39	8.13	31.23	28.62	3.82	11
B1	20220808	Cloudy	Moderate	Mid-Flood	Bottom	4.3	15:07	8.43	8.13	31.24	28.55	4.04	10

Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
B2	20220808	Cloudy	Moderate	Mid-Flood	Surface	1	15:24	9.15	8.21	31.22	28.43	3.11	10
B2	20220808	Cloudy	Moderate	Mid-Flood	Surface	1	15:24	9.22	8.21	31.35	28.48	2.89	7
B2	20220808	Cloudy	Moderate	Mid-Flood	Bottom	4.2	15:23	9.25	8.15	31.19	28.6	2.94	16
B2	20220808	Cloudy	Moderate	Mid-Flood	Bottom	4.2	15:23	9.35	8.17	31.21	28.58	3.43	18
B3	20220808	Cloudy	Moderate	Mid-Flood	Surface	1	14:58	9.18	8.15	31.72	28.65	3.26	17
B3	20220808	Cloudy	Moderate	Mid-Flood	Surface	1	14:58	8.95	8.15	31.58	28.48	3.37	16
B3	20220808	Cloudy	Moderate	Mid-Flood	Bottom	3.4	14:57	9.09	8.18	31.55	28.59	3.74	15
B3	20220808	Cloudy	Moderate	Mid-Flood	Bottom	3.4	14:57	8.94	8.14	31.71	28.65	3.63	15
B4	20220808	Cloudy	Moderate	Mid-Flood	Surface	1	15:08	8.75	8.28	32.21	28.65	3.81	15
B4	20220808	Cloudy	Moderate	Mid-Flood	Surface	1	15:08	8.98	8.29	31.9	28.74	3.26	15
B4	20220808	Cloudy	Moderate	Mid-Flood	Bottom	4.3	15:07	8.9	8.29	31.9	28.55	4.39	15
B4	20220808	Cloudy	Moderate	Mid-Flood	Bottom	4.3	15:07	9.01	8.29	32.02	28.74	4.32	14
C1A	20220808	Cloudy	Moderate	Mid-Flood	Surface	1	14:47	9.3	8.22	30.58	28.79	5.13	6
C1A	20220808	Cloudy	Moderate	Mid-Flood	Surface	1	14:47	9.33	8.15	30.66	28.92	4.94	3
C1A	20220808	Cloudy	Moderate	Mid-Flood	Middle	5.85	14:46	9.1	8.16	30.5	28.9	5.4	4
C1A	20220808	Cloudy	Moderate	Mid-Flood	Middle	5.85	14:46	9.24	8.16	30.68	28.87	5.67	3
C1A	20220808	Cloudy	Moderate	Mid-Flood	Bottom	10.7	14:45	9.17	8.17	30.6	28.88	6.11	3
C1A	20220808	Cloudy	Moderate	Mid-Flood	Bottom	10.7	14:45	9.3	8.18	30.51	28.9	5.86	4
C2A	20220808	Cloudy	Moderate	Mid-Flood	Surface	1	14:47	9.31	8.17	31.66	28.73	6.3	2.5
C2A	20220808	Cloudy	Moderate	Mid-Flood	Surface	1	14:47	9.48	8.21	31.69	28.72	6.1	2.5
C2A	20220808	Cloudy	Moderate	Mid-Flood	Middle	5.7	14:46	9.52	8.23	31.53	28.67	6.44	3
C2A	20220808	Cloudy	Moderate	Mid-Flood	Middle	5.7	14:46	9.37	8.21	31.62	28.79	6.31	2.5
C2A	20220808	Cloudy	Moderate	Mid-Flood	Bottom	10.4	14:45	9.53	8.21	31.61	28.65	6.94	4
C2A	20220808	Cloudy	Moderate	Mid-Flood	Bottom	10.4	14:45	9.39	8.19	31.73	28.73	7.15	3
CR1	20220808	Cloudy	Moderate	Mid-Flood	Surface	1	16:20	9.13	8.26	30.56	28.46	4.55	4
CR1	20220808	Cloudy	Moderate	Mid-Flood	Surface	1	16:20	8.96	8.28	30.69	28.53	4.42	6
CR1	20220808	Cloudy	Moderate	Mid-Flood	Middle	6.25	16:19	9.13	8.28	30.67	28.48	4.32	7
CR1	20220808	Cloudy	Moderate	Mid-Flood	Middle	6.25	16:19	9.17	8.32	30.56	28.52	4.78	6
CR1	20220808	Cloudy	Moderate	Mid-Flood	Bottom	11.5	16:18	9.16	8.32	30.38	28.42	5.41	7
CR1	20220808	Cloudy	Moderate	Mid-Flood	Bottom	11.5	16:18	9.07	8.28	30.66	28.42	4.78	6
CR2	20220808	Cloudy	Moderate	Mid-Flood	Surface	1	16:03	8.4	8.16	31.22	28.85	3.02	8
CR2	20220808	Cloudy	Moderate	Mid-Flood	Surface	1	16:03	8.63	8.18	31.39	28.94	3.18	4
CR2	20220808	Cloudy	Moderate	Mid-Flood	Middle	5.45	16:02	8.52	8.19	31.12	28.98	3.24	5
CR2	20220808	Cloudy	Moderate	Mid-Flood	Middle	5.45	16:02	8.49	8.18	31.2	28.79	2.96	3
CR2	20220808	Cloudy	Moderate	Mid-Flood	Bottom	9.9	16:01	8.44	8.22	31.37	28.94	4.01	5
CR2	20220808	Cloudy	Moderate	Mid-Flood	Bottom	9.9	16:01	8.49	8.19	31.29	28.79	3.97	8
F1A	20220808	Cloudy	Moderate	Mid-Flood	Surface	1	15:34	8.61	8.29	31.97	28.72	3.71	3
F1A	20220808	Cloudy	Moderate	Mid-Flood	Surface	1	15:34	8.69	8.27	32.01	28.72	3.74	4
F1A	20220808	Cloudy	Moderate	Mid-Flood	Middle	4.4	15:33	8.69	8.22	32.07	28.88	3.51	2.5
F1A	20220808	Cloudy	Moderate	Mid-Flood	Middle	4.4	15:33	8.6	8.26	31.97	28.88	3.46	4
F1A	20220808	Cloudy	Moderate	Mid-Flood	Bottom	7.8	15:32	8.65	8.28	32	28.82	4.17	4

Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
F1A	20220808	Cloudy	Moderate	Mid-Flood	Bottom	7.8	15:32	8.56	8.28	32.05	28.78	4.21	2.5
H1	20220808	Cloudy	Moderate	Mid-Flood	Surface	1	15:50	9.3	8.17	32.2	28.71	3.66	13
H1	20220808	Cloudy	Moderate	Mid-Flood	Surface	1	15:50	9.28	8.16	32.22	28.75	3.61	15
H1	20220808	Cloudy	Moderate	Mid-Flood	Middle	3.95	15:49	9.33	8.22	31.93	28.67	3.33	8
H1	20220808	Cloudy	Moderate	Mid-Flood	Middle	3.95	15:49	9.29	8.19	31.93	28.77	3.65	7
H1	20220808	Cloudy	Moderate	Mid-Flood	Bottom	6.9	15:48	9.34	8.21	32.18	28.71	3.86	3
H1	20220808	Cloudy	Moderate	Mid-Flood	Bottom	6.9	15:48	9.26	8.15	32.19	28.69	3.81	4
M1	20220808	Cloudy	Moderate	Mid-Flood	Surface	1	16:00	9.15	8.34	31.48	28.79	4.54	8
M1	20220808	Cloudy	Moderate	Mid-Flood	Surface	1	16:00	8.97	8.28	31.3	28.84	4.09	7
M1	20220808	Cloudy	Moderate	Mid-Flood	Middle	4.1	15:59	9.15	8.33	31.58	28.79	4.4	8
M1	20220808	Cloudy	Moderate	Mid-Flood	Middle	4.1	15:59	9.09	8.33	31.57	28.8	4.92	11
M1	20220808	Cloudy	Moderate	Mid-Flood	Bottom	7.2	15:58	8.89	8.33	31.38	28.86	4.67	10
M1	20220808	Cloudy	Moderate	Mid-Flood	Bottom	7.2	15:58	9.09	8.28	31.29	28.86	4.65	10
B1	20220812	Cloudy	Moderate	Mid-Ebb	Surface	1	11:09	9.05	8.14	31.46	26.45	2.96	6
B1	20220812	Cloudy	Moderate	Mid-Ebb	Surface	1	11:09	9.02	8.18	31.48	26.45	2.81	6
B1	20220812	Cloudy	Moderate	Mid-Ebb	Bottom	4	11:08	9.03	8.11	31.58	26.48	3.49	6
B1	20220812	Cloudy	Moderate	Mid-Ebb	Bottom	4	11:08	9.27	8.18	31.5	26.44	3.3	5
B2	20220812	Cloudy	Moderate	Mid-Ebb	Surface	1	11:24	9.9	8.16	31.19	26.59	3.47	7
B2	20220812	Cloudy	Moderate	Mid-Ebb	Surface	1	11:24	9.92	8.15	31.22	26.61	3.51	10
B2	20220812	Cloudy	Moderate	Mid-Ebb	Bottom	4.1	11:23	9.92	8.17	31.02	26.68	3.58	10
B2	20220812	Cloudy	Moderate	Mid-Ebb	Bottom	4.1	11:23	9.79	8.17	31.17	26.67	3.21	7
В3	20220812	Cloudy	Moderate	Mid-Ebb	Surface	1	12:57	10	8.1	31.78	26.75	4.19	6
В3	20220812	Cloudy	Moderate	Mid-Ebb	Surface	1	12:57	9.91	8.04	31.82	26.81	4.32	7
В3	20220812	Cloudy	Moderate	Mid-Ebb	Bottom	4.4	12:56	9.99	8.08	31.7	26.81	4.82	7
В3	20220812	Cloudy	Moderate	Mid-Ebb	Bottom	4.4	12:56	9.96	8.13	31.61	26.8	4.48	7
B4	20220812	Cloudy	Moderate	Mid-Ebb	Surface	1	12:46	9.87	7.97	31.89	26.59	4.18	6
B4	20220812	Cloudy	Moderate	Mid-Ebb	Surface	1	12:46	9.95	7.97	31.7	26.59	4.3	6
B4	20220812	Cloudy	Moderate	Mid-Ebb	Bottom	3.1	12:45	10.02	8	31.68	26.55	4.56	11
B4	20220812	Cloudy	Moderate	Mid-Ebb	Bottom	3.1	12:45	10.01	7.99	31.85	26.57	4.88	11
C1A	20220812	Cloudy	Moderate	Mid-Ebb	Surface	1	10:46	10.29	8.03	30.56	26.35	5.1	9
C1A	20220812	Cloudy	Moderate	Mid-Ebb	Surface	1	10:46	10.35	7.99	30.68	26.33	5.37	7
C1A	20220812	Cloudy	Moderate	Mid-Ebb	Middle	5.2	10:45	10.22	7.97	30.54	26.4	5.53	9
C1A	20220812	Cloudy	Moderate	Mid-Ebb	Middle	5.2	10:45	10.26	8.04	30.77	26.37	5.39	6
C1A	20220812	Cloudy	Moderate	Mid-Ebb	Bottom	9.4	10:44	10.26	8	30.7	26.43	5.85	8
C1A	20220812	Cloudy	Moderate	Mid-Ebb	Bottom	9.4	10:44	10.22	7.99	30.65	26.36	5.86	8
C2A	20220812	Cloudy	Moderate	Mid-Ebb	Surface	1	12:43	9.76	8	30.72	26.46	4.39	6
C2A	20220812	Cloudy	Moderate	Mid-Ebb	Surface	1	12:43	9.65	8.01	30.55	26.55	4.23	7
C2A	20220812	Cloudy	Moderate	Mid-Ebb	Middle	6	12:42	9.69	8.06	30.6	26.58	4.48	7
C2A	20220812	Cloudy	Moderate	Mid-Ebb	Middle	6	12:42	9.65	8.02	30.74	26.47	4.36	5
C2A	20220812	Cloudy	Moderate	Mid-Ebb	Bottom	11	12:41	9.7	7.99	30.53	26.53	5	7
C2A	20220812	Cloudy	Moderate	Mid-Ebb	Bottom	11	12:41	9.68	7.99	30.66	26.58	4.88	5

Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
CR1	20220812	Cloudy	Moderate	Mid-Ebb	Surface	1	12:21	10.05	8.11	31.31	26.51	3.33	3
CR1	20220812	Cloudy	Moderate	Mid-Ebb	Surface	1	12:21	10.16	8.04	31.32	26.51	3.27	2.5
CR1	20220812	Cloudy	Moderate	Mid-Ebb	Middle	6.25	12:20	10.1	8.15	31.34	26.46	3.01	2.5
CR1	20220812	Cloudy	Moderate	Mid-Ebb	Middle	6.25	12:20	10.21	8.13	31.34	26.54	2.89	2.5
CR1	20220812	Cloudy	Moderate	Mid-Ebb	Bottom	11.5	12:19	10.09	8.12	31.39	26.48	3.34	2.5
CR1	20220812	Cloudy	Moderate	Mid-Ebb	Bottom	11.5	12:19	10.2	8.13	31.33	26.49	3.41	2.5
CR2	20220812	Cloudy	Moderate	Mid-Ebb	Surface	1	12:06	9.4	8.09	31.49	26.6	3.64	5
CR2	20220812	Cloudy	Moderate	Mid-Ebb	Surface	1	12:06	9.41	8.09	31.5	26.57	3.99	3
CR2	20220812	Cloudy	Moderate	Mid-Ebb	Middle	5.75	12:05	9.52	8.17	31.42	26.6	3.35	3
CR2	20220812	Cloudy	Moderate	Mid-Ebb	Middle	5.75	12:05	9.37	8.17	31.54	26.5	3.15	2.5
CR2	20220812	Cloudy	Moderate	Mid-Ebb	Bottom	10.5	12:04	9.51	8.06	31.51	26.5	3.74	3
CR2	20220812	Cloudy	Moderate	Mid-Ebb	Bottom	10.5	12:04	9.34	8.13	31.42	26.61	3.95	5
F1A	20220812	Cloudy	Moderate	Mid-Ebb	Surface	1	12:23	9.25	8.17	31.25	26.62	3.88	8
F1A	20220812	Cloudy	Moderate	Mid-Ebb	Surface	1	12:23	9.13	8.15	31.4	26.51	3.84	7
F1A	20220812	Cloudy	Moderate	Mid-Ebb	Middle	4.55	12:22	9.14	8.16	31.43	26.6	3.75	8
F1A	20220812	Cloudy	Moderate	Mid-Ebb	Middle	4.55	12:22	9.25	8.18	31.29	26.54	3.41	8
F1A	20220812	Cloudy	Moderate	Mid-Ebb	Bottom	8.1	12:21	9.25	8.14	31.26	26.6	3.77	4
F1A	20220812	Cloudy	Moderate	Mid-Ebb	Bottom	8.1	12:21	9.18	8.13	31.27	26.55	3.99	2.5
H1	20220812	Cloudy	Moderate	Mid-Ebb	Surface	1	11:51	9.48	8.13	30.67	26.55	2.91	8
H1	20220812	Cloudy	Moderate	Mid-Ebb	Surface	1	11:51	9.4	8.1	30.64	26.5	2.81	8
H1	20220812	Cloudy	Moderate	Mid-Ebb	Middle	4.2	11:50	9.4	8.11	30.54	26.52	3.32	6
H1	20220812	Cloudy	Moderate	Mid-Ebb	Middle	4.2	11:50	9.46	8.08	30.66	26.5	3.51	6
H1	20220812	Cloudy	Moderate	Mid-Ebb	Bottom	7.4	11:49	9.45	8.13	30.58	26.49	3.33	8
H1	20220812	Cloudy	Moderate	Mid-Ebb	Bottom	7.4	11:49	9.32	8.11	30.69	26.49	3.27	7
M1	20220812	Cloudy	Moderate	Mid-Ebb	Surface	1	11:55	9.99	8.08	31.23	26.49	3.61	2.5
M1	20220812	Cloudy	Moderate	Mid-Ebb	Surface	1	11:55	9.96	8.05	31.33	26.5	3.88	4
M1	20220812	Cloudy	Moderate	Mid-Ebb	Middle	4.7	11:54	9.82	8.05	31.18	26.49	4.37	4
M1	20220812	Cloudy	Moderate	Mid-Ebb	Middle	4.7	11:54	9.98	8.04	31.33	26.52	4.25	3
M1	20220812	Cloudy	Moderate	Mid-Ebb	Bottom	8.4	11:53	9.8	8.1	31.17	26.46	3.77	3
M1	20220812	Cloudy	Moderate	Mid-Ebb	Bottom	8.4	11:53	9.88	8.07	31.14	26.43	3.76	5
B1	20220812	Cloudy	Moderate	Mid-Flood	Surface	1	17:04	9.68	8.12	31.22	26.53	3.62	5
B1	20220812	Cloudy	Moderate	Mid-Flood	Surface	1	17:04	10.06	8.13	31.17	26.45	3.53	5
B1	20220812	Cloudy	Moderate	Mid-Flood	Bottom	4.5	17:03	10.07	8.14	31.27	26.54	3.35	5
B1	20220812	Cloudy	Moderate	Mid-Flood	Bottom	4.5	17:03	9.52	8.15	31.08	26.46	3.46	8
B2	20220812	Cloudy	Moderate	Mid-Flood	Surface	1	17:22	10.11	8.21	31.05	26.58	4.04	6
B2	20220812	Cloudy	Moderate	Mid-Flood	Surface	1	17:22	10.03	8.28	31.09	26.51	4.51	8
B2	20220812	Cloudy	Moderate	Mid-Flood	Bottom	4.1	17:21	10.07	8.21	30.91	26.51	4.43	7
B2	20220812	Cloudy	Moderate	Mid-Flood	Bottom	4.1	17:21	9.54	8.16	31.12	26.49	4.32	6
В3	20220812	Cloudy	Moderate	Mid-Flood	Surface	1	16:49	9.54	8.15	30.23	26.45	3.7	7
В3	20220812	Cloudy	Moderate	Mid-Flood	Surface	1	16:49	9.45	8.1	30.42	26.43	3.9	7
В3	20220812	Cloudy	Moderate	Mid-Flood	Bottom	4	16:48	9.34	8.13	30.36	26.48	3.95	6

Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
B3	20220812	Cloudy	Moderate	Mid-Flood	Bottom	4	16:48	9.55	8.11	30.25	26.43	4.1	7
B4	20220812	Cloudy	Moderate	Mid-Flood	Surface	1	16:58	8.82	8.24	30.2	26.54	4.53	4
B4	20220812	Cloudy	Moderate	Mid-Flood	Surface	1	16:58	8.69	8.25	30.22	26.58	4.35	2.5
B4	20220812	Cloudy	Moderate	Mid-Flood	Bottom	4.5	16:57	8.69	8.2	30.2	26.55	4.82	4
B4	20220812	Cloudy	Moderate	Mid-Flood	Bottom	4.5	16:57	8.71	8.23	30.12	26.6	4.56	4
C1A	20220812	Cloudy	Moderate	Mid-Flood	Surface	1	16:39	9.66	8.09	30.44	26.57	4.55	5
C1A	20220812	Cloudy	Moderate	Mid-Flood	Surface	1	16:39	9.66	8.02	30.58	26.58	4.56	3
C1A	20220812	Cloudy	Moderate	Mid-Flood	Middle	5.35	16:38	9.68	8.02	30.62	26.59	4.82	4
C1A	20220812	Cloudy	Moderate	Mid-Flood	Middle	5.35	16:38	10.04	8.03	30.61	26.54	4.76	4
C1A	20220812	Cloudy	Moderate	Mid-Flood	Bottom	9.7	16:37	10.1	8.11	30.58	26.54	5.38	5
C1A	20220812	Cloudy	Moderate	Mid-Flood	Bottom	9.7	16:37	9.63	8.08	30.45	26.57	5.17	4
C2A	20220812	Cloudy	Moderate	Mid-Flood	Surface	1	16:39	9.03	8.1	31.26	26.73	4.92	4
C2A	20220812	Cloudy	Moderate	Mid-Flood	Surface	1	16:39	9.06	8.08	31.42	26.66	4.65	4
C2A	20220812	Cloudy	Moderate	Mid-Flood	Middle	5.6	16:38	8.91	8.07	31.44	26.69	5.38	5
C2A	20220812	Cloudy	Moderate	Mid-Flood	Middle	5.6	16:38	8.92	8.15	31.36	26.74	5.5	5
C2A	20220812	Cloudy	Moderate	Mid-Flood	Bottom	10.2	16:37	8.96	8.09	31.41	26.72	5.76	5
C2A	20220812	Cloudy	Moderate	Mid-Flood	Bottom	10.2	16:37	8.97	8.08	31.45	26.67	5.59	5
CR1	20220812	Cloudy	Moderate	Mid-Flood	Surface	1	18:22	8.66	8.07	31.55	26.6	3.57	5
CR1	20220812	Cloudy	Moderate	Mid-Flood	Surface	1	18:22	8.63	8.08	31.54	26.64	3.2	6
CR1	20220812	Cloudy	Moderate	Mid-Flood	Middle	6.15	18:21	8.79	8.08	31.47	26.56	3.56	6
CR1	20220812	Cloudy	Moderate	Mid-Flood	Middle	6.15	18:21	8.67	8.13	31.48	26.6	3.45	6
CR1	20220812	Cloudy	Moderate	Mid-Flood	Bottom	11.3	18:20	8.74	8.06	31.62	26.58	3.69	5
CR1	20220812	Cloudy	Moderate	Mid-Flood	Bottom	11.3	18:20	8.82	8.1	31.43	26.63	3.47	5
CR2	20220812	Cloudy	Moderate	Mid-Flood	Surface	1	18:05	9.99	8.19	30.25	26.75	4.38	7
CR2	20220812	Cloudy	Moderate	Mid-Flood	Surface	1	18:05	9.95	8.17	30.23	26.68	4.28	9
CR2	20220812	Cloudy	Moderate	Mid-Flood	Middle	5.9	18:04	9.99	8.2	30.19	26.73	4.59	6
CR2	20220812	Cloudy	Moderate	Mid-Flood	Middle	5.9	18:04	9.9	8.18	30.23	26.74	4.27	9
CR2	20220812	Cloudy	Moderate	Mid-Flood	Bottom	10.8	18:03	9.93	8.19	30.32	26.71	4.33	6
CR2	20220812	Cloudy	Moderate	Mid-Flood	Bottom	10.8	18:03	10.1	8.27	30.16	26.71	5	7
F1A	20220812	Cloudy	Moderate	Mid-Flood	Surface	1	17:26	10.06	8.15	31.16	26.42	4.4	6
F1A	20220812	Cloudy	Moderate	Mid-Flood	Surface	1	17:26	9.59	8.09	31.15	26.42	3.99	5
F1A	20220812	Cloudy	Moderate	Mid-Flood	Middle	4.05	17:25	10.11	8.21	31.17	26.4	4.42	6
F1A	20220812	Cloudy	Moderate	Mid-Flood	Middle	4.05	17:25	9.69	8.15	31.17	26.42	3.78	5
F1A	20220812	Cloudy	Moderate	Mid-Flood	Bottom	7.1	17:24	10.04	8.19	31.31	26.41	4.98	5
F1A	20220812	Cloudy	Moderate	Mid-Flood	Bottom	7.1	17:24	9.62	8.13	31.28	26.4	4.5	6
H1	20220812	Cloudy	Moderate	Mid-Flood	Surface	1	17:52	8.83	8.14	30.16	26.34	3.7	4
H1	20220812	Cloudy	Moderate	Mid-Flood	Surface	1	17:52	8.83	8.15	30.09	26.31	3.24	4
H1	20220812	Cloudy	Moderate	Mid-Flood	Middle	3.75	17:51	8.93	8.22	30.31	26.32	3.7	4
H1	20220812	Cloudy	Moderate	Mid-Flood	Middle	3.75	17:51	8.95	8.15	30.07	26.3	3.59	4
H1	20220812	Cloudy	Moderate	Mid-Flood	Bottom	6.5	17:50	9.01	8.19	30.24	26.33	3.62	2.5
H1	20220812	Cloudy	Moderate	Mid-Flood	Bottom	6.5	17:50	8.92	8.12	30.16	26.36	3.76	3

Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
M1	20220812	Cloudy	Moderate	Mid-Flood	Surface	1	17:51	9.16	8.17	31.06	26.54	3.45	5
M1	20220812	Cloudy	Moderate	Mid-Flood	Surface	1	17:51	9	8.15	30.97	26.47	3.57	6
M1	20220812	Cloudy	Moderate	Mid-Flood	Middle	4.2	17:50	9.01	8.2	31.08	26.54	4.24	8
M1	20220812	Cloudy	Moderate	Mid-Flood	Middle	4.2	17:50	9.01	8.19	31.03	26.53	3.73	5
M1	20220812	Cloudy	Moderate	Mid-Flood	Bottom	7.4	17:49	9.01	8.19	30.92	26.51	3.93	7
M1	20220812	Cloudy	Moderate	Mid-Flood	Bottom	7.4	17:49	9.04	8.23	30.96	26.48	3.93	6
B1	20220814	Sunny	Moderate	Mid-Flood	Surface	1	09:45	8.45	8.13	30.75	30.09	3.26	2.5
B1	20220814	Sunny	Moderate	Mid-Flood	Surface	1	09:45	8.48	8.16	30.82	30.16	3.47	3
B1	20220814	Sunny	Moderate	Mid-Flood	Bottom	3.9	09:44	8.51	8.18	30.79	30.09	3.34	3
B1	20220814	Sunny	Moderate	Mid-Flood	Bottom	3.9	09:44	8.46	8.09	31.06	30.22	3.59	5
B2	20220814	Sunny	Moderate	Mid-Flood	Surface	1	10:01	8.39	8.12	31.07	30.24	3.33	7
B2	20220814	Sunny	Moderate	Mid-Flood	Surface	1	10:01	8.47	8.12	31.09	30.28	3.29	7
B2	20220814	Sunny	Moderate	Mid-Flood	Bottom	3.6	10:00	8.5	8.14	31.3	30.28	3.93	10
B2	20220814	Sunny	Moderate	Mid-Flood	Bottom	3.6	10:00	8.57	8.2	31.08	30.11	3.44	8
В3	20220814	Sunny	Moderate	Mid-Flood	Surface	1	10:05	8.39	8.26	31.16	29.98	3.91	5
B3	20220814	Sunny	Moderate	Mid-Flood	Surface	1	10:05	8.57	8.18	31.37	30	4.13	6
В3	20220814	Sunny	Moderate	Mid-Flood	Bottom	3.6	10:04	8.38	8.26	31.14	29.99	4.26	8
В3	20220814	Sunny	Moderate	Mid-Flood	Bottom	3.6	10:04	8.73	8.19	31.18	29.81	4.18	5
B4	20220814	Sunny	Moderate	Mid-Flood	Surface	1	09:50	9.27	8.18	31.99	30.37	3.61	8
B4	20220814	Sunny	Moderate	Mid-Flood	Surface	1	09:50	9.32	8.14	31.97	30.32	3.5	5
B4	20220814	Sunny	Moderate	Mid-Flood	Bottom	3.7	09:49	9.41	8.24	32.23	30.22	3.84	8
В4	20220814	Sunny	Moderate	Mid-Flood	Bottom	3.7	09:49	9.37	8.23	31.96	30.23	3.73	7
C1A	20220814	Sunny	Moderate	Mid-Flood	Surface	1	09:18	9.32	8.24	31.31	30.17	4.61	2.5
C1A	20220814	Sunny	Moderate	Mid-Flood	Surface	1	09:18	9.32	8.24	31.49	30.08	4.3	4
C1A	20220814	Sunny	Moderate	Mid-Flood	Middle	5.4	09:17	9.27	8.21	31.6	30.12	4.77	3
C1A	20220814	Sunny	Moderate	Mid-Flood	Middle	5.4	09:17	9.19	8.24	31.33	30.27	4.65	2.5
C1A	20220814	Sunny	Moderate	Mid-Flood	Bottom	9.8	09:16	9.08	8.21	31.6	30.2	5.1	3
C1A	20220814	Sunny	Moderate	Mid-Flood	Bottom	9.8	09:16	9.19	8.18	31.44	30.17	5.25	2.5
C2A	20220814	Sunny	Moderate	Mid-Flood	Surface	1	08:10	8.34	8.24	32.08	30.3	4.9	2.5
C2A	20220814	Sunny	Moderate	Mid-Flood	Surface	1	08:10	8.34	8.16	32.34	30.31	5.12	2.5
C2A	20220814	Sunny	Moderate	Mid-Flood	Middle	5.5	08:09	8.29	8.25	32.35	30.24	5.37	2.5
C2A	20220814	Sunny	Moderate	Mid-Flood	Middle	5.5	08:09	8.28	8.28	32.34	30.19	5.26	2.5
C2A	20220814	Sunny	Moderate	Mid-Flood	Bottom	10	08:08	8.61	8.24	32.36	30.21	5.76	2.5
C2A	20220814	Sunny	Moderate	Mid-Flood	Bottom	10	08:08	8.42	8.21	32.27	30.31	5.5	2.5
CR1	20220814	Sunny	Moderate	Mid-Flood	Surface	1	08:32	8.3	8.16	30.16	30.27	3.26	11
CR1	20220814	Sunny	Moderate	Mid-Flood	Surface	1	08:32	8.26	8.15	30.33	30.39	3.3	12
CR1	20220814	Sunny	Moderate	Mid-Flood	Middle	6.3	08:31	8.36	8.17	30.27	30.4	3.57	11
CR1	20220814	Sunny	Moderate	Mid-Flood	Middle	6.3	08:31	8.33	8.09	30.26	30.29	3.54	12
CR1	20220814	Sunny	Moderate	Mid-Flood	Bottom	11.6	08:30	8.38	8.13	30.37	30.36	4.02	12
CR1	20220814	Sunny	Moderate	Mid-Flood	Bottom	11.6	08:30	8.36	8.18	30.12	30.4	4.42	13
CR2	20220814	Sunny	Moderate	Mid-Flood	Surface	1	08:47	8.93	8.18	31.43	30.41	3.55	11

Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
CR2	20220814	Sunny	Moderate	Mid-Flood	Surface	1	08:47	9.08	8.18	31.53	30.26	3.35	12
CR2	20220814	Sunny	Moderate	Mid-Flood	Middle	5.95	08:46	8.96	8.18	31.34	30.34	3.53	11
CR2	20220814	Sunny	Moderate	Mid-Flood	Middle	5.95	08:46	8.99	8.19	31.58	30.27	3.79	13
CR2	20220814	Sunny	Moderate	Mid-Flood	Bottom	10.9	08:45	8.95	8.14	31.35	30.28	3.36	10
CR2	20220814	Sunny	Moderate	Mid-Flood	Bottom	10.9	08:45	8.98	8.1	31.39	30.38	3.83	8
F1A	20220814	Sunny	Moderate	Mid-Flood	Surface	1	09:26	8.75	8.19	30.81	30.35	4.42	6
F1A	20220814	Sunny	Moderate	Mid-Flood	Surface	1	09:26	8.69	8.21	30.91	30.35	4.6	4
F1A	20220814	Sunny	Moderate	Mid-Flood	Middle	4	09:25	8.6	8.28	30.71	30.23	5.24	2.5
F1A	20220814	Sunny	Moderate	Mid-Flood	Middle	4	09:25	8.7	8.22	30.85	30.35	5.04	3
F1A	20220814	Sunny	Moderate	Mid-Flood	Bottom	7	09:24	8.54	8.24	30.94	30.3	4.68	4
F1A	20220814	Sunny	Moderate	Mid-Flood	Bottom	7	09:24	8.61	8.19	30.7	30.23	4.71	3
H1	20220814	Sunny	Moderate	Mid-Flood	Surface	1	08:59	9.08	8.25	31.28	30.2	3.6	2.5
H1	20220814	Sunny	Moderate	Mid-Flood	Surface	1	08:59	9.26	8.25	31.24	30.17	3.33	2.5
H1	20220814	Sunny	Moderate	Mid-Flood	Middle	3.9	08:58	9.28	8.23	31.1	30.09	3.4	2.5
H1	20220814	Sunny	Moderate	Mid-Flood	Middle	3.9	08:58	9.04	8.21	31.14	30.11	3.44	2.5
H1	20220814	Sunny	Moderate	Mid-Flood	Bottom	6.8	08:57	9.04	8.28	31.29	30.2	3.59	2.5
H1	20220814	Sunny	Moderate	Mid-Flood	Bottom	6.8	08:57	9.25	8.19	31.18	30.16	3.74	4
M1	20220814	Sunny	Moderate	Mid-Flood	Surface	1	09:03	9.27	8.2	31.24	30.14	4.76	5
M1	20220814	Sunny	Moderate	Mid-Flood	Surface	1	09:03	9.27	8.2	31.26	30.26	4.11	7
M1	20220814	Sunny	Moderate	Mid-Flood	Middle	4.25	09:02	9.19	8.22	31.15	30.14	4.04	8
M1	20220814	Sunny	Moderate	Mid-Flood	Middle	4.25	09:02	9.27	8.21	31.2	30.2	4.7	5
M1	20220814	Sunny	Moderate	Mid-Flood	Bottom	7.5	09:01	9.2	8.2	31.29	30.13	5.1	6
M1	20220814	Sunny	Moderate	Mid-Flood	Bottom	7.5	09:01	9.24	8.15	31.27	30.18	4.96	3
B1	20220814	Sunny	Moderate	Mid-Ebb	Surface	1	12:38	8.79	8.14	32.57	30.63	2.95	12
B1	20220814	Sunny	Moderate	Mid-Ebb	Surface	1	12:38	8.93	8.08	32.71	30.71	2.83	14
B1	20220814	Sunny	Moderate	Mid-Ebb	Bottom	3.6	12:37	9.09	8.12	32.7	30.62	3.35	3
B1	20220814	Sunny	Moderate	Mid-Ebb	Bottom	3.6	12:37	8.79	8.17	32.75	30.67	3.43	3
B2	20220814	Sunny	Moderate	Mid-Ebb	Surface	1	12:52	9.19	8.13	31.34	30.94	2.8	4
B2	20220814	Sunny	Moderate	Mid-Ebb	Surface	1	12:52	9.39	8.13	31.64	30.81	2.87	4
B2	20220814	Sunny	Moderate	Mid-Ebb	Bottom	4.1	12:51	9.36	8.12	31.49	30.88	3.14	3
B2	20220814	Sunny	Moderate	Mid-Ebb	Bottom	4.1	12:51	9.32	8.15	31.39	30.89	3.27	5
B3	20220814	Sunny	Moderate	Mid-Ebb	Surface	1	12:25	8.86	8.14	32.09	30.8	3.92	3
B3	20220814	Sunny	Moderate	Mid-Ebb	Surface	1	12:25	8.77	8.15	32.04	30.96	4.4	2.5
B3	20220814	Sunny	Moderate	Mid-Ebb	Bottom	3.4	12:24	8.83	8.15	31.95	30.93	4.96	2.5
B3	20220814	Sunny	Moderate	Mid-Ebb	Bottom	3.4	12:24	8.93	8.18	32.08	30.82	5.33	2.5
B4	20220814	Sunny	Moderate	Mid-Ebb	Surface	1	12:38	8.66	8.1	31.94	30.65	4.35	2.5
B4	20220814	Sunny	Moderate	Mid-Ebb	Surface	1	12:38	8.72	8.13	31.83	30.77	4.42	3
B4	20220814	Sunny	Moderate	Mid-Ebb	Bottom	3.3	12:37	8.37	8.1	31.99	30.84	4.78	5
B4	20220814	Sunny	Moderate	Mid-Ebb	Bottom	3.3	12:37	8.45	8.1	31.94	30.64	4.98	3
C1A	20220814	Sunny	Moderate	Mid-Ebb	Surface	1	12:16	9.41	8.16	32.46	30.94	5.17	3
C1A	20220814	Sunny	Moderate	Mid-Ebb	Surface	1	12:16	9.35	8.15	32.41	30.83	4.78	3

Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
C1A	20220814	Sunny	Moderate	Mid-Ebb	Middle	5.4	12:15	9.37	8.08	32.44	30.84	5.78	2.5
C1A	20220814	Sunny	Moderate	Mid-Ebb	Middle	5.4	12:15	9.27	8.08	32.53	30.85	5.67	2.5
C1A	20220814	Sunny	Moderate	Mid-Ebb	Bottom	9.8	12:14	9.31	8.16	32.38	30.87	6.29	3
C1A	20220814	Sunny	Moderate	Mid-Ebb	Bottom	9.8	12:14	9.27	8.08	32.53	30.8	6.13	2.5
C2A	20220814	Sunny	Moderate	Mid-Ebb	Surface	1	12:16	8.7	8.12	31.96	30.64	4.7	2.5
C2A	20220814	Sunny	Moderate	Mid-Ebb	Surface	1	12:16	8.72	8.2	32.03	30.67	4.66	4
C2A	20220814	Sunny	Moderate	Mid-Ebb	Middle	5.95	12:15	8.99	8.15	31.74	30.73	5.06	3
C2A	20220814	Sunny	Moderate	Mid-Ebb	Middle	5.95	12:15	8.9	8.18	31.77	30.86	4.89	3
C2A	20220814	Sunny	Moderate	Mid-Ebb	Bottom	10.9	12:14	8.93	8.19	32.02	30.66	5.39	2.5
C2A	20220814	Sunny	Moderate	Mid-Ebb	Bottom	10.9	12:14	8.99	8.16	31.94	30.8	5.26	3
CR1	20220814	Sunny	Moderate	Mid-Ebb	Surface	1	13:45	9.28	8.11	31.45	30.66	4.16	2.5
CR1	20220814	Sunny	Moderate	Mid-Ebb	Surface	1	13:45	9.22	8.15	31.42	30.81	4.24	3
CR1	20220814	Sunny	Moderate	Mid-Ebb	Middle	6.4	13:44	9.29	8.16	31.51	30.68	4.08	4
CR1	20220814	Sunny	Moderate	Mid-Ebb	Middle	6.4	13:44	9.26	8.09	31.35	30.6	4.1	3
CR1	20220814	Sunny	Moderate	Mid-Ebb	Bottom	11.8	13:43	9.15	8.11	31.47	30.67	3.6	5
CR1	20220814	Sunny	Moderate	Mid-Ebb	Bottom	11.8	13:43	9.16	8.2	31.41	30.62	4.27	5
CR2	20220814	Sunny	Moderate	Mid-Ebb	Surface	1	13:30	9.48	8.11	31.93	30.49	3.52	2.5
CR2	20220814	Sunny	Moderate	Mid-Ebb	Surface	1	13:30	9.44	8.1	31.83	30.6	3.84	4
CR2	20220814	Sunny	Moderate	Mid-Ebb	Middle	5.45	13:29	9.51	8.13	31.9	30.43	4.02	2.5
CR2	20220814	Sunny	Moderate	Mid-Ebb	Middle	5.45	13:29	9.39	8.14	31.94	30.51	4.02	4
CR2	20220814	Sunny	Moderate	Mid-Ebb	Bottom	9.9	13:28	9.31	8.08	31.89	30.39	3.66	4
CR2	20220814	Sunny	Moderate	Mid-Ebb	Bottom	9.9	13:28	9.3	8.09	31.91	30.46	3.55	4
F1A	20220814	Sunny	Moderate	Mid-Ebb	Surface	1	13:05	8.84	8.17	32.14	30.63	4.21	5
F1A	20220814	Sunny	Moderate	Mid-Ebb	Surface	1	13:05	8.96	8.14	32.08	30.73	4.51	3
F1A	20220814	Sunny	Moderate	Mid-Ebb	Middle	4.45	13:04	9	8.17	32.3	30.65	4.48	3
F1A	20220814	Sunny	Moderate	Mid-Ebb	Middle	4.45	13:04	8.82	8.2	32.36	30.61	4.26	4
F1A	20220814	Sunny	Moderate	Mid-Ebb	Bottom	7.9	13:03	9	8.18	32.29	30.58	4.57	3
F1A	20220814	Sunny	Moderate	Mid-Ebb	Bottom	7.9	13:03	8.96	8.19	32.22	30.56	5.19	3
H1	20220814	Sunny	Moderate	Mid-Ebb	Surface	1	13:17	8.85	8.19	32.36	30.69	4.11	4
H1	20220814	Sunny	Moderate	Mid-Ebb	Surface	1	13:17	8.96	8.13	32.44	30.7	3.58	4
H1	20220814	Sunny	Moderate	Mid-Ebb	Middle	4.2	13:16	8.99	8.15	32.58	30.83	3.59	4
H1	20220814	Sunny	Moderate	Mid-Ebb	Middle	4.2	13:16	9.09	8.17	32.6	30.81	3.65	2.5
H1	20220814	Sunny	Moderate	Mid-Ebb	Bottom	7.4	13:15	9.04	8.17	32.47	30.64	3.99	3
H1	20220814	Sunny	Moderate	Mid-Ebb	Bottom	7.4	13:15	8.92	8.15	32.58	30.66	3.77	3
M1	20220814	Sunny	Moderate	Mid-Ebb	Surface	1	13:27	9.11	8.19	30.89	30.73	3.91	2.5
M1	20220814	Sunny	Moderate	Mid-Ebb	Surface	1	13:27	9.34	8.17	30.93	30.55	3.68	2.5
M1	20220814	Sunny	Moderate	Mid-Ebb	Middle	4.6	13:26	9.42	8.17	30.91	30.67	3.74	4
M1	20220814	Sunny	Moderate	Mid-Ebb	Middle	4.6	13:26	9.37	8.14	30.9	30.57	3.9	2.5
M1	20220814	Sunny	Moderate	Mid-Ebb	Bottom	8.2	13:25	9.25	8.18	30.73	30.52	4	3
M1	20220814	Sunny	Moderate	Mid-Ebb	Bottom	8.2	13:25	9.32	8.19	30.68	30.62	4.14	2.5
B1	20220816	Sunny	Moderate	Mid-Flood	Surface	1	09:17	8.88	8.18	28.58	28.57	2.88	2.5

Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
B1	20220816	Sunny	Moderate	Mid-Flood	Surface	1	09:17	8.82	8.23	28.55	28.59	2.75	2.5
B1	20220816	Sunny	Moderate	Mid-Flood	Bottom	4.6	09:16	8.94	8.16	28.48	28.58	3.27	2.5
B1	20220816	Sunny	Moderate	Mid-Flood	Bottom	4.6	09:16	8.76	8.23	28.77	28.65	3.15	2.5
B2	20220816	Sunny	Moderate	Mid-Flood	Surface	1	09:34	8.46	8.12	29.54	28.75	2.83	2.5
B2	20220816	Sunny	Moderate	Mid-Flood	Surface	1	09:34	8.6	8.21	29.63	28.68	2.73	2.5
B2	20220816	Sunny	Moderate	Mid-Flood	Bottom	3.8	09:33	8.63	8.15	29.76	28.74	2.83	2.5
B2	20220816	Sunny	Moderate	Mid-Flood	Bottom	3.8	09:33	8.67	8.19	29.62	28.57	3.2	3
В3	20220816	Sunny	Moderate	Mid-Flood	Surface	1	10:14	8.91	8.07	28.66	28.78	3.85	2.5
В3	20220816	Sunny	Moderate	Mid-Flood	Surface	1	10:14	8.82	8.07	28.82	28.73	3.62	2.5
В3	20220816	Sunny	Moderate	Mid-Flood	Bottom	4.3	10:13	8.82	8.13	28.89	28.78	4.01	3
В3	20220816	Sunny	Moderate	Mid-Flood	Bottom	4.3	10:13	8.77	8.15	28.76	28.74	4.49	2.5
B4	20220816	Sunny	Moderate	Mid-Flood	Surface	1	10:03	8.87	8.28	28.66	28.79	3.33	2.5
B4	20220816	Sunny	Moderate	Mid-Flood	Surface	1	10:03	8.86	8.25	28.85	28.82	3.54	2.5
B4	20220816	Sunny	Moderate	Mid-Flood	Bottom	4.1	10:02	8.93	8.21	28.91	28.8	3.83	2.5
B4	20220816	Sunny	Moderate	Mid-Flood	Bottom	4.1	10:02	9.01	8.27	28.75	28.98	3.71	2.5
C1A	20220816	Sunny	Moderate	Mid-Flood	Surface	1	08:51	8.12	8.23	28.94	28.95	5.23	3
C1A	20220816	Sunny	Moderate	Mid-Flood	Surface	1	08:51	8.23	8.23	29.12	28.91	4.98	2.5
C1A	20220816	Sunny	Moderate	Mid-Flood	Middle	5.75	08:50	8.22	8.25	29.16	28.92	5.54	3
C1A	20220816	Sunny	Moderate	Mid-Flood	Middle	5.75	08:50	8.11	8.21	29.08	28.85	5.34	2.5
C1A	20220816	Sunny	Moderate	Mid-Flood	Bottom	10.5	08:49	8.25	8.22	29.17	28.98	5.77	3
C1A	20220816	Sunny	Moderate	Mid-Flood	Bottom	10.5	08:49	8.1	8.23	28.98	28.96	5.73	2.5
C2A	20220816	Sunny	Moderate	Mid-Flood	Surface	1	08:02	8.45	8.24	28.46	28.61	5.24	4
C2A	20220816	Sunny	Moderate	Mid-Flood	Surface	1	08:02	8.47	8.23	28.49	28.56	5.63	2.5
C2A	20220816	Sunny	Moderate	Mid-Flood	Middle	6	08:01	8.55	8.25	28.33	28.64	5.97	2.5
C2A	20220816	Sunny	Moderate	Mid-Flood	Middle	6	08:01	8.4	8.24	28.46	28.44	6.02	3
C2A	20220816	Sunny	Moderate	Mid-Flood	Bottom	11	08:00	8.51	8.23	28.61	28.54	6.21	3
C2A	20220816	Sunny	Moderate	Mid-Flood	Bottom	11	08:00	8.41	8.21	28.67	28.49	5.89	3
CR1	20220816	Sunny	Moderate	Mid-Flood	Surface	1	08:18	8.77	8.01	30.04	28.65	3.15	5
CR1	20220816	Sunny	Moderate	Mid-Flood	Surface	1	08:18	8.85	8.13	29.92	28.7	3.33	3
CR1	20220816	Sunny	Moderate	Mid-Flood	Middle	6.3	08:17	8.69	8.01	30.01	28.75	3.82	3
CR1	20220816	Sunny	Moderate	Mid-Flood	Middle	6.3	08:17	8.8	8.07	30.03	28.65	3.8	3
CR1	20220816	Sunny	Moderate	Mid-Flood	Bottom	11.6	08:16	8.76	8.12	30.01	28.74	4.19	3
CR1	20220816	Sunny	Moderate	Mid-Flood	Bottom	11.6	08:16	8.77	8.12	30.01	28.58	4.2	3
CR2	20220816	Sunny	Moderate	Mid-Flood	Surface	1	08:34	8.92	8.08	29.21	28.82	3.13	7
CR2	20220816	Sunny	Moderate	Mid-Flood	Surface	1	08:34	8.88	8.11	28.97	28.87	3.48	7
CR2	20220816	Sunny	Moderate	Mid-Flood	Middle	5.75	08:33	8.9	8.2	29.21	28.95	3.31	5
CR2	20220816	Sunny	Moderate	Mid-Flood	Middle	5.75	08:33	9.03	8.17	29.14	28.93	3.82	3
CR2	20220816	Sunny	Moderate	Mid-Flood	Bottom	10.5	08:32	8.86	8.17	29.02	29	4.18	7
CR2	20220816	Sunny	Moderate	Mid-Flood	Bottom	10.5	08:32	9	8.09	29.18	28.81	4.19	9
F1A	20220816	Sunny	Moderate	Mid-Flood	Surface	1	09:40	8.23	8.25	28.99	28.66	4.57	3
F1A	20220816	Sunny	Moderate	Mid-Flood	Surface	1	09:40	8.14	8.23	29.02	28.67	4.76	3

Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
F1A	20220816	Sunny	Moderate	Mid-Flood	Middle	4.35	09:39	8.14	8.21	28.91	28.58	4.54	3
F1A	20220816	Sunny	Moderate	Mid-Flood	Middle	4.35	09:39	8.04	8.21	29	28.68	4.49	3
F1A	20220816	Sunny	Moderate	Mid-Flood	Bottom	7.7	09:38	8.12	8.22	29.13	28.65	4.85	3
F1A	20220816	Sunny	Moderate	Mid-Flood	Bottom	7.7	09:38	8.13	8.24	29.13	28.54	5.36	2.5
H1	20220816	Sunny	Moderate	Mid-Flood	Surface	1	10:01	8.46	8.26	29.55	28.59	3.01	4
H1	20220816	Sunny	Moderate	Mid-Flood	Surface	1	10:01	8.31	8.2	29.86	28.6	2.93	2.5
H1	20220816	Sunny	Moderate	Mid-Flood	Middle	3.8	10:00	8.32	8.26	29.84	28.64	3.72	4
H1	20220816	Sunny	Moderate	Mid-Flood	Middle	3.8	10:00	8.52	8.24	29.68	28.66	3.61	2.5
H1	20220816	Sunny	Moderate	Mid-Flood	Bottom	6.6	09:59	8.5	8.21	29.76	28.59	4.28	4
H1	20220816	Sunny	Moderate	Mid-Flood	Bottom	6.6	09:59	8.49	8.26	29.79	28.63	4.37	3
M1	20220816	Sunny	Moderate	Mid-Flood	Surface	1	09:18	8.99	8.16	29.93	28.49	2.9	3
M1	20220816	Sunny	Moderate	Mid-Flood	Surface	1	09:18	8.85	8.16	30.14	28.53	3.14	4
M1	20220816	Sunny	Moderate	Mid-Flood	Middle	3.85	09:17	8.95	8.23	30.1	28.51	3.65	4
M1	20220816	Sunny	Moderate	Mid-Flood	Middle	3.85	09:17	8.93	8.12	30.06	28.44	3.33	7
M1	20220816	Sunny	Moderate	Mid-Flood	Bottom	6.7	09:16	8.82	8.14	29.97	28.53	3.87	5
M1	20220816	Sunny	Moderate	Mid-Flood	Bottom	6.7	09:16	8.96	8.14	29.95	28.44	3.72	5
B1	20220816	Sunny	Moderate	Mid-Ebb	Surface	1	13:54	8.45	8.12	29.17	28.42	3.15	4
B1	20220816	Sunny	Moderate	Mid-Ebb	Surface	1	13:54	8.48	8.1	28.8	28.48	3.03	7
B1	20220816	Sunny	Moderate	Mid-Ebb	Bottom	3.6	13:53	8.61	8.08	28.77	28.36	3.4	4
B1	20220816	Sunny	Moderate	Mid-Ebb	Bottom	3.6	13:53	8.62	8.1	28.65	28.43	3.66	4
B2	20220816	Sunny	Moderate	Mid-Ebb	Surface	1	14:08	8.49	8.2	28.54	28.51	3.21	5
B2	20220816	Sunny	Moderate	Mid-Ebb	Surface	1	14:08	8.53	8.16	28.31	28.42	3.82	7
B2	20220816	Sunny	Moderate	Mid-Ebb	Bottom	4.3	14:07	9.02	8.17	28.37	28.5	3.89	4
B2	20220816	Sunny	Moderate	Mid-Ebb	Bottom	4.3	14:07	8.52	8.13	28.75	28.63	3.61	4
В3	20220816	Sunny	Moderate	Mid-Ebb	Surface	1	13:43	8.62	8.07	29.35	28.34	4.16	5
В3	20220816	Sunny	Moderate	Mid-Ebb	Surface	1	13:43	8.52	8.1	29.72	28.54	3.8	4
В3	20220816	Sunny	Moderate	Mid-Ebb	Bottom	4.3	13:42	8.6	8.09	29.28	28.48	4.13	6
В3	20220816	Sunny	Moderate	Mid-Ebb	Bottom	4.3	13:42	8.51	8.06	29.78	28.42	4.24	5
B4	20220816	Sunny	Moderate	Mid-Ebb	Surface	1	13:53	8.68	8.1	29.6	28.27	3.55	4
B4	20220816	Sunny	Moderate	Mid-Ebb	Surface	1	13:53	8.73	8.17	29.55	28.22	3.43	5
B4	20220816	Sunny	Moderate	Mid-Ebb	Bottom	3.1	13:52	8.56	8.18	29.09	28.19	4.04	3
B4	20220816	Sunny	Moderate	Mid-Ebb	Bottom	3.1	13:52	8.67	8.08	29.37	28.26	3.92	5
C1A	20220816	Sunny	Moderate	Mid-Ebb	Surface	1	13:32	8.95	8.23	29.53	28.41	5.76	2.5
C1A	20220816	Sunny	Moderate	Mid-Ebb	Surface	1	13:32	9.01	8.22	29.81	28.37	5.89	4
C1A	20220816	Sunny	Moderate	Mid-Ebb	Middle	4.7	13:31	8.86	8.25	29.96	28.26	6.32	5
C1A	20220816	Sunny	Moderate	Mid-Ebb	Middle	4.7	13:31	9.02	8.25	30.24	28.13	6.18	3
C1A	20220816	Sunny	Moderate	Mid-Ebb	Bottom	8.4	13:30	8.97	8.24	29.76	28.32	6.64	5
C1A	20220816	Sunny	Moderate	Mid-Ebb	Bottom	8.4	13:30	9.06	8.26	30.02	28.23	6.52	6
C2A	20220816	Sunny	Moderate	Mid-Ebb	Surface	1	13:32	8.6	8.16	30.63	28.21	5.62	3
C2A	20220816	Sunny	Moderate	Mid-Ebb	Surface	1	13:32	8.62	8.22	29.89	28.16	5.53	3
C2A	20220816	Sunny	Moderate	Mid-Ebb	Middle	5.85	13:31	8.63	8.14	29.81	28.41	6.03	4

Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
C2A	20220816	Sunny	Moderate	Mid-Ebb	Middle	5.85	13:31	8.53	8.16	30.47	28.28	5.78	2.5
C2A	20220816	Sunny	Moderate	Mid-Ebb	Bottom	10.7	13:30	8.72	8.2	29.72	28.31	6.13	10
C2A	20220816	Sunny	Moderate	Mid-Ebb	Bottom	10.7	13:30	8.72	8.14	30.49	28.18	6.26	10
CR1	20220816	Sunny	Moderate	Mid-Ebb	Surface	1	15:01	8.69	8.12	29.89	28.79	3.49	4
CR1	20220816	Sunny	Moderate	Mid-Ebb	Surface	1	15:01	8.59	8.12	29.59	28.64	3.5	4
CR1	20220816	Sunny	Moderate	Mid-Ebb	Middle	6.4	15:00	8.57	8.13	30.28	28.7	3.6	13
CR1	20220816	Sunny	Moderate	Mid-Ebb	Middle	6.4	15:00	8.52	8.09	30.12	28.64	3.39	11
CR1	20220816	Sunny	Moderate	Mid-Ebb	Bottom	11.8	14:59	8.6	8.08	29.59	28.82	4.26	11
CR1	20220816	Sunny	Moderate	Mid-Ebb	Bottom	11.8	14:59	8.54	8.14	30.15	28.66	3.89	11
CR2	20220816	Sunny	Moderate	Mid-Ebb	Surface	1	14:47	8.43	8.24	28.94	28.27	3.72	11
CR2	20220816	Sunny	Moderate	Mid-Ebb	Surface	1	14:47	8.5	8.12	29.14	28.31	3.21	11
CR2	20220816	Sunny	Moderate	Mid-Ebb	Middle	5.8	14:46	9.08	8.16	28.71	28.13	4.05	21
CR2	20220816	Sunny	Moderate	Mid-Ebb	Middle	5.8	14:46	9.07	8.17	28.79	28.41	4.03	22
CR2	20220816	Sunny	Moderate	Mid-Ebb	Bottom	10.6	14:45	8.93	8.2	29.16	28.18	3.87	21
CR2	20220816	Sunny	Moderate	Mid-Ebb	Bottom	10.6	14:45	9.01	8.2	29.12	28.25	4.12	21
F1A	20220816	Sunny	Moderate	Mid-Ebb	Surface	1	14:18	8.64	8	28.7	28.74	5.55	10
F1A	20220816	Sunny	Moderate	Mid-Ebb	Surface	1	14:18	8.74	8.07	29.51	28.64	6	11
F1A	20220816	Sunny	Moderate	Mid-Ebb	Middle	4	14:17	8.6	8.11	28.88	28.55	5.81	7
F1A	20220816	Sunny	Moderate	Mid-Ebb	Middle	4	14:17	8.61	8.07	29.42	28.74	5.22	4
F1A	20220816	Sunny	Moderate	Mid-Ebb	Bottom	7	14:16	8.66	8.12	28.83	28.7	5.98	11
F1A	20220816	Sunny	Moderate	Mid-Ebb	Bottom	7	14:16	8.62	8.05	29.28	28.7	5.65	10
H1	20220816	Sunny	Moderate	Mid-Ebb	Surface	1	14:34	8.66	8.25	28.87	28.62	4.14	4
H1	20220816	Sunny	Moderate	Mid-Ebb	Surface	1	14:34	8.63	8.23	29.06	28.64	4.83	3
H1	20220816	Sunny	Moderate	Mid-Ebb	Middle	4	14:33	8.66	8.27	29.01	28.66	4.7	4
H1	20220816	Sunny	Moderate	Mid-Ebb	Middle	4	14:33	8.57	8.21	28.59	28.66	4.43	3
H1	20220816	Sunny	Moderate	Mid-Ebb	Bottom	7	14:32	8.58	8.18	28.84	28.71	5.36	8
H1	20220816	Sunny	Moderate	Mid-Ebb	Bottom	7	14:32	8.58	8.26	28.82	28.77	4.97	5
M1	20220816	Sunny	Moderate	Mid-Ebb	Surface	1	14:49	8	8.2	29.37	28.23	4.32	11
M1	20220816	Sunny	Moderate	Mid-Ebb	Surface	1	14:49	8	8.24	29.12	28.44	4.47	12
M1	20220816	Sunny	Moderate	Mid-Ebb	Middle	4.5	14:48	8.06	8.16	28.66	28.28	4.39	11
M1	20220816	Sunny	Moderate	Mid-Ebb	Middle	4.5	14:48	8.04	8.22	29.03	28.3	4.61	12
M1	20220816	Sunny	Moderate	Mid-Ebb	Bottom	8	14:47	8.14	8.15	28.87	28.21	5.11	11
M1	20220816	Sunny	Moderate	Mid-Ebb	Bottom	8	14:47	8.16	8.25	29.05	28.47	4.71	11
B1	20220818	Sunny	Moderate	Mid-Flood	Surface	1	10:19	8.21	8.1	31.29	28.37	4.95	2.5
B1	20220818	Sunny	Moderate	Mid-Flood	Surface	1	10:19	8.36	8.07	31.39	28.47	4.94	2.5
B1	20220818	Sunny	Moderate	Mid-Flood	Bottom	4.3	10:18	8.26	8.09	31.41	28.51	5.35	2.5
B1	20220818	Sunny	Moderate	Mid-Flood	Bottom	4.3	10:18	8.2	8.07	31.19	28.37	5.42	2.5
B2	20220818	Sunny	Moderate	Mid-Flood	Surface	1	10:40	8.48	8.12	31.43	28.15	2.39	2.5
B2	20220818	Sunny	Moderate	Mid-Flood	Surface	1	10:40	8.48	8.08	31.43	28.22	2.44	2.5
В2	20220818	Sunny	Moderate	Mid-Flood	Bottom	3.8	10:39	8.54	8.12	31.42	28.14	3.62	2.5
B2	20220818	Sunny	Moderate	Mid-Flood	Bottom	3.8	10:39	8.39	8.14	31.4	28.25	3.14	2.5

Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
B3	20220818	Sunny	Moderate	Mid-Flood	Surface	1	11:08	8	8.21	31.63	28.25	2.12	2.5
В3	20220818	Sunny	Moderate	Mid-Flood	Surface	1	11:08	7.88	8.27	31.91	28.19	2.25	2.5
B3	20220818	Sunny	Moderate	Mid-Flood	Bottom	3.5	11:07	7.87	8.21	31.77	28.17	2.65	2.5
B3	20220818	Sunny	Moderate	Mid-Flood	Bottom	3.5	11:07	7.91	8.21	31.78	28.11	2.45	2.5
B4	20220818	Sunny	Moderate	Mid-Flood	Surface	1	10:56	8.21	8.28	31.84	28.42	3.49	3
B4	20220818	Sunny	Moderate	Mid-Flood	Surface	1	10:56	8.24	8.28	31.7	28.35	3.26	2.5
B4	20220818	Sunny	Moderate	Mid-Flood	Bottom	4.5	10:55	8.33	8.3	31.65	28.41	4.07	3
B4	20220818	Sunny	Moderate	Mid-Flood	Bottom	4.5	10:55	8.18	8.31	31.81	28.47	4.05	3
C1A	20220818	Sunny	Moderate	Mid-Flood	Surface	1	09:49	8.4	8.08	31.53	28.51	5.03	2.5
C1A	20220818	Sunny	Moderate	Mid-Flood	Surface	1	09:49	8.49	8.1	31.75	28.52	4.91	2.5
C1A	20220818	Sunny	Moderate	Mid-Flood	Middle	5.3	09:48	8.31	8.11	31.72	28.42	5.36	2.5
C1A	20220818	Sunny	Moderate	Mid-Flood	Middle	5.3	09:48	8.49	8.09	31.8	28.42	5.22	3
C1A	20220818	Sunny	Moderate	Mid-Flood	Bottom	9.6	09:47	8.47	8.05	31.52	28.4	5.82	4
C1A	20220818	Sunny	Moderate	Mid-Flood	Bottom	9.6	09:47	8.39	8.04	31.72	28.42	5.59	4
C2A	20220818	Sunny	Moderate	Mid-Flood	Surface	1	08:55	8.25	8.26	30.59	28.16	5.88	2.5
C2A	20220818	Sunny	Moderate	Mid-Flood	Surface	1	08:55	8.31	8.24	30.64	28.09	5.94	4
C2A	20220818	Sunny	Moderate	Mid-Flood	Middle	5.85	08:54	8.12	8.28	30.93	28.24	6.28	2.5
C2A	20220818	Sunny	Moderate	Mid-Flood	Middle	5.85	08:54	8.34	8.21	30.8	28.22	6.13	3
C2A	20220818	Sunny	Moderate	Mid-Flood	Bottom	10.7	08:53	8.32	8.27	30.86	28.17	6.37	2.5
C2A	20220818	Sunny	Moderate	Mid-Flood	Bottom	10.7	08:53	8.31	8.23	30.88	28.1	6.53	2.5
CR1	20220818	Sunny	Moderate	Mid-Flood	Surface	1	09:16	9.21	8.27	32.35	28.19	2.98	2.5
CR1	20220818	Sunny	Moderate	Mid-Flood	Surface	1	09:16	9.12	8.3	32.25	28.32	3.22	2.5
CR1	20220818	Sunny	Moderate	Mid-Flood	Middle	6.25	09:15	9.05	8.25	32.34	28.23	4.02	2.5
CR1	20220818	Sunny	Moderate	Mid-Flood	Middle	6.25	09:15	9.13	8.31	32.19	28.23	3.95	2.5
CR1	20220818	Sunny	Moderate	Mid-Flood	Bottom	11.5	09:14	9.26	8.24	32.23	28.29	3.35	2.5
CR1	20220818	Sunny	Moderate	Mid-Flood	Bottom	11.5	09:14	9.27	8.24	32.36	28.28	3.53	3
CR2	20220818	Sunny	Moderate	Mid-Flood	Surface	1	09:32	8.54	8.16	31.29	28.2	4.85	3
CR2	20220818	Sunny	Moderate	Mid-Flood	Surface	1	09:32	8.54	8.17	31.35	28.14	5.09	2.5
CR2	20220818	Sunny	Moderate	Mid-Flood	Middle	5.65	09:31	8.6	8.18	31.3	28.16	4.83	2.5
CR2	20220818	Sunny	Moderate	Mid-Flood	Middle	5.65	09:31	8.5	8.16	31.27	28.21	4.88	2.5
CR2	20220818	Sunny	Moderate	Mid-Flood	Bottom	10.3	09:30	8.57	8.14	31.46	28.27	4.66	2.5
CR2	20220818	Sunny	Moderate	Mid-Flood	Bottom	10.3	09:30	8.6	8.15	31.36	28.14	4.38	2.5
F1A	20220818	Sunny	Moderate	Mid-Flood	Surface	1	10:31	8.36	8.06	32.06	28.32	5.02	2.5
F1A	20220818	Sunny	Moderate	Mid-Flood	Surface	1	10:31	8.3	8.07	32.08	28.42	4.81	2.5
F1A	20220818	Sunny	Moderate	Mid-Flood	Middle	4.15	10:30	8.43	8.11	32.29	28.27	5.21	2.5
F1A	20220818	Sunny	Moderate	Mid-Flood	Middle	4.15	10:30	8.38	8.04	32	28.41	5.08	2.5
F1A	20220818	Sunny	Moderate	Mid-Flood	Bottom	7.3	10:29	8.3	8.09	32.24	28.4	5.87	2.5
F1A	20220818	Sunny	Moderate	Mid-Flood	Bottom	7.3	10:29	8.36	8.06	32.32	28.38	5.54	4
H1	20220818	Sunny	Moderate	Mid-Flood	Surface	1	11:08	8.75	8.16	32.28	28.23	4.18	3
H1	20220818	Sunny	Moderate	Mid-Flood	Surface	1	11:08	8.76	8.21	31.99	28.16	4.23	4
H1	20220818	Sunny	Moderate	Mid-Flood	Middle	4.1	11:07	8.76	8.2	32.3	28.17	4.17	3

Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
H1	20220818	Sunny	Moderate	Mid-Flood	Middle	4.1	11:07	8.87	8.15	32.14	28.16	3.63	3
H1	20220818	Sunny	Moderate	Mid-Flood	Bottom	7.2	11:06	8.71	8.18	32.12	28.16	4.26	4
H1	20220818	Sunny	Moderate	Mid-Flood	Bottom	7.2	11:06	8.7	8.16	32.07	28.24	4.88	4
M1	20220818	Sunny	Moderate	Mid-Flood	Surface	1	10:07	8.58	8.24	31.79	28.39	5.19	2.5
M1	20220818	Sunny	Moderate	Mid-Flood	Surface	1	10:07	8.52	8.21	31.61	28.23	5.07	2.5
M1	20220818	Sunny	Moderate	Mid-Flood	Middle	4.15	10:06	8.45	8.26	31.93	28.23	5.11	2.5
M1	20220818	Sunny	Moderate	Mid-Flood	Middle	4.15	10:06	8.52	8.22	31.95	28.33	5.56	2.5
M1	20220818	Sunny	Moderate	Mid-Flood	Bottom	7.3	10:05	8.43	8.22	31.82	28.38	5.73	2.5
M1	20220818	Sunny	Moderate	Mid-Flood	Bottom	7.3	10:05	8.65	8.26	31.66	28.37	5.57	4
B1	20220818	Sunny	Moderate	Mid-Ebb	Surface	1	15:05	8.35	8.05	32.03	28.42	4.23	2.5
B1	20220818	Sunny	Moderate	Mid-Ebb	Surface	1	15:05	8.27	8.11	31.84	28.4	4.08	3
B1	20220818	Sunny	Moderate	Mid-Ebb	Bottom	3.6	15:04	8.23	8.05	32.09	28.31	4.19	2.5
B1	20220818	Sunny	Moderate	Mid-Ebb	Bottom	3.6	15:04	8.33	8.05	31.74	28.39	3.81	3
B2	20220818	Sunny	Moderate	Mid-Ebb	Surface	1	15:21	8.3	8.26	30.89	28.72	3.68	2.5
B2	20220818	Sunny	Moderate	Mid-Ebb	Surface	1	15:21	8.47	8.24	31.11	28.73	3.28	2.5
B2	20220818	Sunny	Moderate	Mid-Ebb	Bottom	4.3	15:20	8.27	8.22	31.28	28.74	3.84	2.5
B2	20220818	Sunny	Moderate	Mid-Ebb	Bottom	4.3	15:20	8.47	8.28	30.91	28.68	3.66	2.5
В3	20220818	Sunny	Moderate	Mid-Ebb	Surface	1	14:55	8.63	8.12	31.99	28.43	3.61	2.5
В3	20220818	Sunny	Moderate	Mid-Ebb	Surface	1	14:55	8.69	8.14	31.99	28.4	3.62	4
В3	20220818	Sunny	Moderate	Mid-Ebb	Bottom	3.7	14:54	8.68	8.14	32.34	28.43	4.87	2.5
В3	20220818	Sunny	Moderate	Mid-Ebb	Bottom	3.7	14:54	8.7	8.17	31.97	28.51	4.69	4
B4	20220818	Sunny	Moderate	Mid-Ebb	Surface	1	15:05	8.99	8.09	31.32	28.6	2.48	3
B4	20220818	Sunny	Moderate	Mid-Ebb	Surface	1	15:05	8.95	8.1	31.56	28.57	2.58	2.5
B4	20220818	Sunny	Moderate	Mid-Ebb	Bottom	3.6	15:04	8.99	8.08	31.19	28.5	3.19	3
B4	20220818	Sunny	Moderate	Mid-Ebb	Bottom	3.6	15:04	8.95	8.12	31.55	28.5	2.83	3
C1A	20220818	Sunny	Moderate	Mid-Ebb	Surface	1	14:44	8.84	8.05	31.8	28.52	5.7	2.5
C1A	20220818	Sunny	Moderate	Mid-Ebb	Surface	1	14:44	8.85	8.04	32.05	28.59	6.07	2.5
C1A	20220818	Sunny	Moderate	Mid-Ebb	Middle	5.25	14:43	8.77	8.1	32.11	28.52	6.5	3
C1A	20220818	Sunny	Moderate	Mid-Ebb	Middle	5.25	14:43	8.86	8.07	31.77	28.56	6.22	2.5
C1A	20220818	Sunny	Moderate	Mid-Ebb	Bottom	9.5	14:42	8.79	8.1	31.92	28.5	7.09	2.5
C1A	20220818	Sunny	Moderate	Mid-Ebb	Bottom	9.5	14:42	8.74	8.09	31.98	28.49	6.7	2.5
C2A	20220818	Sunny	Moderate	Mid-Ebb	Surface	1	14:44	8.46	8.22	31.15	28.5	5.99	2.5
C2A	20220818	Sunny	Moderate	Mid-Ebb	Surface	1	14:44	8.61	8.21	31.33	28.37	5.61	3
C2A	20220818	Sunny	Moderate	Mid-Ebb	Middle	5.9	14:43	8.43	8.25	31.23	28.5	5.61	2.5
C2A	20220818	Sunny	Moderate	Mid-Ebb	Middle	5.9	14:43	8.61	8.2	30.93	28.47	5.83	2.5
C2A	20220818	Sunny	Moderate	Mid-Ebb	Bottom	10.8	14:42	8.48	8.19	31.18	28.37	6.28	3
C2A	20220818	Sunny	Moderate	Mid-Ebb	Bottom	10.8	14:42	8.62	8.19	30.95	28.36	5.93	2.5
CR1	20220818	Sunny	Moderate	Mid-Ebb	Surface	1	16:16	7.97	8.24	30.55	28.38	4.56	2.5
CR1	20220818	Sunny	Moderate	Mid-Ebb	Surface	1	16:16	8.02	8.2	30.66	28.43	4.61	2.5
CR1	20220818	Sunny	Moderate	Mid-Ebb	Middle	6.45	16:15	7.96	8.21	30.26	28.34	4.63	2.5
CR1	20220818	Sunny	Moderate	Mid-Ebb	Middle	6.45	16:15	8.07	8.23	30.61	28.31	5.05	2.5

Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
CR1	20220818	Sunny	Moderate	Mid-Ebb	Bottom	11.9	16:14	7.95	8.19	30.37	28.31	4.57	2.5
CR1	20220818	Sunny	Moderate	Mid-Ebb	Bottom	11.9	16:14	8.08	8.22	30.39	28.26	5.22	2.5
CR2	20220818	Sunny	Moderate	Mid-Ebb	Surface	1	16:01	7.93	8.16	30.42	28.35	3.61	2.5
CR2	20220818	Sunny	Moderate	Mid-Ebb	Surface	1	16:01	7.97	8.16	30.52	28.38	3.31	2.5
CR2	20220818	Sunny	Moderate	Mid-Ebb	Middle	6	16:00	7.99	8.17	30.78	28.35	3.99	2.5
CR2	20220818	Sunny	Moderate	Mid-Ebb	Middle	6	16:00	7.96	8.17	30.5	28.35	3.33	2.5
CR2	20220818	Sunny	Moderate	Mid-Ebb	Bottom	11	15:59	8.09	8.17	30.81	28.4	3.78	2.5
CR2	20220818	Sunny	Moderate	Mid-Ebb	Bottom	11	15:59	7.95	8.15	30.74	28.46	3.72	2.5
F1A	20220818	Sunny	Moderate	Mid-Ebb	Surface	1	15:30	8.67	8.19	31.14	28.4	4.28	2.5
F1A	20220818	Sunny	Moderate	Mid-Ebb	Surface	1	15:30	8.74	8.23	30.83	28.33	4.41	2.5
F1A	20220818	Sunny	Moderate	Mid-Ebb	Middle	4.55	15:29	8.78	8.22	31.03	28.32	4.67	2.5
F1A	20220818	Sunny	Moderate	Mid-Ebb	Middle	4.55	15:29	8.78	8.24	31.25	28.36	4.71	2.5
F1A	20220818	Sunny	Moderate	Mid-Ebb	Bottom	8.1	15:28	8.88	8.24	30.97	28.3	4.46	2.5
F1A	20220818	Sunny	Moderate	Mid-Ebb	Bottom	8.1	15:28	8.88	8.26	31.16	28.3	4.39	2.5
H1	20220818	Sunny	Moderate	Mid-Ebb	Surface	1	15:47	9.31	8.21	31.7	28.58	2.63	2.5
H1	20220818	Sunny	Moderate	Mid-Ebb	Surface	1	15:47	9.15	8.17	31.94	28.63	2.84	2.5
H1	20220818	Sunny	Moderate	Mid-Ebb	Middle	3.95	15:46	9.26	8.18	31.96	28.51	2.91	2.5
H1	20220818	Sunny	Moderate	Mid-Ebb	Middle	3.95	15:46	9.22	8.16	31.87	28.56	3.07	2.5
H1	20220818	Sunny	Moderate	Mid-Ebb	Bottom	6.9	15:45	9.29	8.22	32.03	28.54	3.43	2.5
H1	20220818	Sunny	Moderate	Mid-Ebb	Bottom	6.9	15:45	9.25	8.2	31.61	28.53	3.13	2.5
M1	20220818	Sunny	Moderate	Mid-Ebb	Surface	1	15:55	8.32	8.18	30.36	28.59	5.21	2.5
M1	20220818	Sunny	Moderate	Mid-Ebb	Surface	1	15:55	8.45	8.24	30.8	28.6	5.6	2.5
M1	20220818	Sunny	Moderate	Mid-Ebb	Middle	4.8	15:54	8.49	8.22	30.5	28.41	5.7	2.5
M1	20220818	Sunny	Moderate	Mid-Ebb	Middle	4.8	15:54	8.5	8.19	30.82	28.52	4.95	2.5
M1	20220818	Sunny	Moderate	Mid-Ebb	Bottom	8.6	15:53	8.29	8.21	30.65	28.47	5.94	3
M1	20220818	Sunny	Moderate	Mid-Ebb	Bottom	8.6	15:53	8.39	8.18	30.43	28.39	5.08	2.5
B1	20220820	Sunny	Moderate	Mid-Ebb	Surface	1	08:50	7.98	8.24	31.89	28.24	4.34	2.5
B1	20220820	Sunny	Moderate	Mid-Ebb	Surface	1	08:50	7.95	8.19	32.02	28.28	4.29	2.5
B1	20220820	Sunny	Moderate	Mid-Ebb	Bottom	4.2	08:49	7.97	8.27	31.65	28.18	4.79	2.5
B1	20220820	Sunny	Moderate	Mid-Ebb	Bottom	4.2	08:49	7.98	8.27	32.02	28.19	4.49	2.5
B2	20220820	Sunny	Moderate	Mid-Ebb	Surface	1	09:06	8.17	8.1	31.5	28.06	4.94	2.5
B2	20220820	Sunny	Moderate	Mid-Ebb	Surface	1	09:06	8.04	8.1	31.23	28.07	5.1	2.5
B2	20220820	Sunny	Moderate	Mid-Ebb	Bottom	4.4	09:05	8.08	8.06	31.52	28.12	5.5	2.5
B2	20220820	Sunny	Moderate	Mid-Ebb	Bottom	4.4	09:05	8.08	8.12	31.24	28.15	5.22	2.5
B3	20220820	Sunny	Moderate	Mid-Ebb	Surface	1	10:15	8.87	8.16	31.82	28.06	4.1	2.5
B3	20220820	Sunny	Moderate	Mid-Ebb	Surface	1	10:15	8.81	8.15	31.51	27.99	4.28	2.5
B3	20220820	Sunny	Moderate	Mid-Ebb	Bottom	4	10:14	8.81	8.12	31.59	27.97	4.75	2.5
B3	20220820	Sunny	Moderate	Mid-Ebb	Bottom	4	10:14	8.93	8.13	31.61	28.04	4.3	3
B4	20220820	Sunny	Moderate	Mid-Ebb	Surface	1	10:29	8.67	8.12	30.86	28.31	4.06	2.5
B4	20220820	Sunny	Moderate	Mid-Ebb	Surface	1	10:29	8.6	8.15	30.59	28.31	3.66	2.5
B4	20220820	Sunny	Moderate	Mid-Ebb	Bottom	3.6	10:28	8.52	8.18	30.75	28.31	3.78	2.5

Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
B4	20220820	Sunny	Moderate	Mid-Ebb	Bottom	3.6	10:28	8.55	8.23	30.7	28.17	3.62	2.5
C1A	20220820	Sunny	Moderate	Mid-Ebb	Surface	1	08:21	8.24	8.14	31.97	28.01	5.35	5
C1A	20220820	Sunny	Moderate	Mid-Ebb	Surface	1	08:21	8.14	8.24	32.16	28.06	5.09	3
C1A	20220820	Sunny	Moderate	Mid-Ebb	Middle	5	08:20	8.17	8.24	32.12	28.14	5.77	4
C1A	20220820	Sunny	Moderate	Mid-Ebb	Middle	5	08:20	8.2	8.13	31.79	27.98	5.26	3
C1A	20220820	Sunny	Moderate	Mid-Ebb	Bottom	9	08:19	8.15	8.14	32.12	28.09	6.56	4
C1A	20220820	Sunny	Moderate	Mid-Ebb	Bottom	9	08:19	8.1	8.22	32.12	28.01	6.16	4
C2A	20220820	Sunny	Moderate	Mid-Ebb	Surface	1	10:24	8.09	8.08	31.68	28.3	5.02	4
C2A	20220820	Sunny	Moderate	Mid-Ebb	Surface	1	10:24	8.2	8.09	31.51	28.4	5.24	5
C2A	20220820	Sunny	Moderate	Mid-Ebb	Middle	5.85	10:23	8.18	8.11	31.79	28.34	5.49	3
C2A	20220820	Sunny	Moderate	Mid-Ebb	Middle	5.85	10:23	8.31	8.12	31.89	28.31	5.33	4
C2A	20220820	Sunny	Moderate	Mid-Ebb	Bottom	10.7	10:22	8.11	8.21	31.75	28.39	5.79	3
C2A	20220820	Sunny	Moderate	Mid-Ebb	Bottom	10.7	10:22	8.17	8.21	31.86	28.34	5.97	5
CR1	20220820	Sunny	Moderate	Mid-Ebb	Surface	1	10:04	9.26	8.05	30.65	28.41	4.69	2.5
CR1	20220820	Sunny	Moderate	Mid-Ebb	Surface	1	10:04	9.32	8.12	30.75	28.37	4.8	2.5
CR1	20220820	Sunny	Moderate	Mid-Ebb	Middle	6.75	10:03	9.34	8.04	30.88	28.3	4.57	3
CR1	20220820	Sunny	Moderate	Mid-Ebb	Middle	6.75	10:03	9.34	8.07	30.76	28.26	5.07	3
CR1	20220820	Sunny	Moderate	Mid-Ebb	Bottom	12.5	10:02	9.16	8.16	30.74	28.39	5.34	2.5
CR1	20220820	Sunny	Moderate	Mid-Ebb	Bottom	12.5	10:02	9.18	8.14	30.64	28.33	4.91	2.5
CR2	20220820	Sunny	Moderate	Mid-Ebb	Surface	1	09:48	8.72	8.18	31.2	28.01	3.56	2.5
CR2	20220820	Sunny	Moderate	Mid-Ebb	Surface	1	09:48	8.92	8.17	31.3	28.13	3.81	2.5
CR2	20220820	Sunny	Moderate	Mid-Ebb	Middle	5.65	09:47	8.8	8.22	31.41	27.99	4	2.5
CR2	20220820	Sunny	Moderate	Mid-Ebb	Middle	5.65	09:47	8.89	8.09	31.24	28.06	3.76	3
CR2	20220820	Sunny	Moderate	Mid-Ebb	Bottom	10.3	09:46	8.89	8.22	31.19	27.97	4.45	2.5
CR2	20220820	Sunny	Moderate	Mid-Ebb	Bottom	10.3	09:46	8.79	8.2	31.35	27.96	4.16	2.5
F1A	20220820	Sunny	Moderate	Mid-Ebb	Surface	1	09:39	8.91	8.18	32.25	27.95	5.08	4
F1A	20220820	Sunny	Moderate	Mid-Ebb	Surface	1	09:39	8.87	8.17	32.12	27.94	5.14	3
F1A	20220820	Sunny	Moderate	Mid-Ebb	Middle	4.3	09:38	8.86	8.14	32.25	28.02	5.39	3
F1A	20220820	Sunny	Moderate	Mid-Ebb	Middle	4.3	09:38	8.86	8.26	32.1	27.91	5.19	3
F1A	20220820	Sunny	Moderate	Mid-Ebb	Bottom	7.6	09:37	8.79	8.26	32.33	28.06	5.12	3
F1A	20220820	Sunny	Moderate	Mid-Ebb	Bottom	7.6	09:37	8.97	8.21	32.4	28.02	5.07	3
H1	20220820	Sunny	Moderate	Mid-Ebb	Surface	1	09:34	8.59	8.14	31.09	28.13	5.48	2.5
H1	20220820	Sunny	Moderate	Mid-Ebb	Surface	1	09:34	8.61	8.14	31.27	28.26	5.48	2.5
H1	20220820	Sunny	Moderate	Mid-Ebb	Middle	4.2	09:33	8.42	8.1	31.09	28.23	4.72	2.5
H1	20220820	Sunny	Moderate	Mid-Ebb	Middle	4.2	09:33	8.5	8.12	31.12	28.1	5.08	2.5
H1	20220820	Sunny	Moderate	Mid-Ebb	Bottom	7.4	09:32	8.61	8.13	31.17	28.15	5.38	2.5
H1	20220820	Sunny	Moderate	Mid-Ebb	Bottom	7.4	09:32	8.43	8.13	31.24	28.15	5.07	4
M1	20220820	Sunny	Moderate	Mid-Ebb	Surface	1	09:15	8.97	8.23	31.28	28.39	4.54	2.5
M1	20220820	Sunny	Moderate	Mid-Ebb	Surface	1	09:15	8.92	8.27	31.18	28.33	4.62	3
M1	20220820	Sunny	Moderate	Mid-Ebb	Middle	4.6	09:14	8.88	8.26	31.35	28.35	4.71	2.5
M1	20220820	Sunny	Moderate	Mid-Ebb	Middle	4.6	09:14	9.03	8.28	31.39	28.44	4.36	2.5

Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
M1	20220820	Sunny	Moderate	Mid-Ebb	Bottom	8.2	09:13	8.91	8.24	31.38	28.28	5.26	2.5
M1	20220820	Sunny	Moderate	Mid-Ebb	Bottom	8.2	09:13	8.96	8.25	31.35	28.43	5.1	2.5
B1	20220820	Sunny	Moderate	Mid-Flood	Surface	1	15:57	8.76	8.31	31.26	28.32	3.31	3
B1	20220820	Sunny	Moderate	Mid-Flood	Surface	1	15:57	8.88	8.2	31.39	28.39	3.3	3
B1	20220820	Sunny	Moderate	Mid-Flood	Bottom	4.2	15:56	8.73	8.23	31.28	28.4	4.03	3
B1	20220820	Sunny	Moderate	Mid-Flood	Bottom	4.2	15:56	8.8	8.27	31.29	28.28	4.28	2.5
B2	20220820	Sunny	Moderate	Mid-Flood	Surface	1	16:13	9.23	8.36	31.99	28.33	4.52	2.5
B2	20220820	Sunny	Moderate	Mid-Flood	Surface	1	16:13	9.25	8.25	31.94	28.29	5.19	2.5
B2	20220820	Sunny	Moderate	Mid-Flood	Bottom	3.5	16:12	9.26	8.32	31.96	28.3	5.3	2.5
B2	20220820	Sunny	Moderate	Mid-Flood	Bottom	3.5	16:12	9.16	8.3	32.06	28.16	5.79	3
B3	20220820	Sunny	Moderate	Mid-Flood	Surface	1	15:48	7.97	8.17	31.84	28.2	4.68	2.5
B3	20220820	Sunny	Moderate	Mid-Flood	Surface	1	15:48	8.07	8.13	31.82	28.09	4.74	2.5
B3	20220820	Sunny	Moderate	Mid-Flood	Bottom	4	15:47	8.07	8.2	31.73	28.19	4.95	2.5
B3	20220820	Sunny	Moderate	Mid-Flood	Bottom	4	15:47	7.87	8.1	31.94	28.1	5.32	3
B4	20220820	Sunny	Moderate	Mid-Flood	Surface	1	15:58	9.15	8.16	30.83	28.23	3.17	2.5
B4	20220820	Sunny	Moderate	Mid-Flood	Surface	1	15:58	9.27	8.25	30.91	28.29	3.28	2.5
B4	20220820	Sunny	Moderate	Mid-Flood	Bottom	3.7	15:57	9.13	8.17	30.88	28.29	3.64	2.5
B4	20220820	Sunny	Moderate	Mid-Flood	Bottom	3.7	15:57	9.3	8.18	30.9	28.29	3.34	2.5
C1A	20220820	Sunny	Moderate	Mid-Flood	Surface	1	15:34	9.17	8.33	31.32	28.19	4.09	2.5
C1A	20220820	Sunny	Moderate	Mid-Flood	Surface	1	15:34	9.2	8.34	31.1	28.34	3.82	3
C1A	20220820	Sunny	Moderate	Mid-Flood	Middle	5	15:33	9.24	8.28	31.22	28.18	5	3
C1A	20220820	Sunny	Moderate	Mid-Flood	Middle	5	15:33	9.19	8.37	30.99	28.25	4.71	5
C1A	20220820	Sunny	Moderate	Mid-Flood	Bottom	9	15:32	9.31	8.36	31.18	28.16	5.85	2.5
C1A	20220820	Sunny	Moderate	Mid-Flood	Bottom	9	15:32	9.17	8.27	31.09	28.18	5.32	2.5
C2A	20220820	Sunny	Moderate	Mid-Flood	Surface	1	15:34	8.46	8.26	31.35	28.18	4.35	4
C2A	20220820	Sunny	Moderate	Mid-Flood	Surface	1	15:34	8.37	8.29	31.01	28.25	4.66	2.5
C2A	20220820	Sunny	Moderate	Mid-Flood	Middle	5.9	15:33	8.34	8.22	31.18	28.13	5.13	4
C2A	20220820	Sunny	Moderate	Mid-Flood	Middle	5.9	15:33	8.32	8.25	31.06	28.27	4.44	2.5
C2A	20220820	Sunny	Moderate	Mid-Flood	Bottom	10.8	15:32	8.39	8.29	31.23	28.16	6.34	2.5
C2A	20220820	Sunny	Moderate	Mid-Flood	Bottom	10.8	15:32	8.33	8.26	31.26	28.29	5.56	4
CR1	20220820	Sunny	Moderate	Mid-Flood	Surface	1	17:05	8.98	8.37	32.1	28.29	4.4	2.5
CR1	20220820	Sunny	Moderate	Mid-Flood	Surface	1	17:05	8.82	8.38	32.21	28.3	4.06	2.5
CR1	20220820	Sunny	Moderate	Mid-Flood	Middle	6.25	17:04	8.91	8.29	31.97	28.28	4.73	2.5
CR1	20220820	Sunny	Moderate	Mid-Flood	Middle	6.25	17:04	8.88	8.38	32.04	28.19	5.05	2.5
CR1	20220820	Sunny	Moderate	Mid-Flood	Bottom	11.5	17:03	8.87	8.35	32.1	28.22	5.13	2.5
CR1	20220820	Sunny	Moderate	Mid-Flood	Bottom	11.5	17:03	8.98	8.3	31.99	28.28	5.18	2.5
CR2	20220820	Sunny	Moderate	Mid-Flood	Surface	1	16:51	8.07	8.21	31.25	28.32	3.36	2.5
CR2	20220820	Sunny	Moderate	Mid-Flood	Surface	1	16:51	8.04	8.13	31.01	28.48	3.46	2.5
CR2	20220820	Sunny	Moderate	Mid-Flood	Middle	5.35	16:50	8	8.2	31.14	28.37	3.52	2.5
CR2	20220820	Sunny	Moderate	Mid-Flood	Middle	5.35	16:50	7.84	8.2	31.18	28.31	3.22	2.5
CR2	20220820	Sunny	Moderate	Mid-Flood	Bottom	9.7	16:49	8	8.14	31.18	28.33	3.44	2.5

Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
CR2	20220820	Sunny	Moderate	Mid-Flood	Bottom	9.7	16:49	7.87	8.12	30.92	28.36	3.56	4
F1A	20220820	Sunny	Moderate	Mid-Flood	Surface	1	16:23	8.87	8.21	31.42	27.96	3.84	2.5
F1A	20220820	Sunny	Moderate	Mid-Flood	Surface	1	16:23	8.83	8.19	31.61	28.1	4.19	2.5
F1A	20220820	Sunny	Moderate	Mid-Flood	Middle	3.85	16:22	8.87	8.2	31.42	27.95	4.16	2.5
F1A	20220820	Sunny	Moderate	Mid-Flood	Middle	3.85	16:22	8.89	8.13	31.45	28.07	3.89	2.5
F1A	20220820	Sunny	Moderate	Mid-Flood	Bottom	6.7	16:21	8.73	8.14	31.67	28.06	3.99	3
F1A	20220820	Sunny	Moderate	Mid-Flood	Bottom	6.7	16:21	8.85	8.14	31.69	28.05	4.27	2.5
H1	20220820	Sunny	Moderate	Mid-Flood	Surface	1	16:39	8.39	8.1	30.73	28.43	4.77	2.5
H1	20220820	Sunny	Moderate	Mid-Flood	Surface	1	16:39	8.48	8.14	31.08	28.36	5.17	2.5
H1	20220820	Sunny	Moderate	Mid-Flood	Middle	3.75	16:38	8.61	8.09	30.96	28.4	5.13	3
H1	20220820	Sunny	Moderate	Mid-Flood	Middle	3.75	16:38	8.59	8.16	30.73	28.51	5.57	2.5
H1	20220820	Sunny	Moderate	Mid-Flood	Bottom	6.5	16:37	8.48	8.19	31.04	28.43	5.67	2.5
H1	20220820	Sunny	Moderate	Mid-Flood	Bottom	6.5	16:37	8.37	8.13	30.9	28.39	4.92	4
M1	20220820	Sunny	Moderate	Mid-Flood	Surface	1	16:47	8.03	8.14	31.77	28.24	5.14	3
M1	20220820	Sunny	Moderate	Mid-Flood	Surface	1	16:47	8.11	8.24	31.6	28.33	5.08	2.5
M1	20220820	Sunny	Moderate	Mid-Flood	Middle	3.8	16:46	7.96	8.24	31.52	28.21	5.39	2.5
M1	20220820	Sunny	Moderate	Mid-Flood	Middle	3.8	16:46	8.07	8.22	31.8	28.32	4.9	2.5
M1	20220820	Sunny	Moderate	Mid-Flood	Bottom	6.6	16:45	7.95	8.14	31.48	28.31	4.6	2.5
M1	20220820	Sunny	Moderate	Mid-Flood	Bottom	6.6	16:45	8.01	8.18	31.7	28.27	4.86	3
B1	20220822	Sunny	Moderate	Mid-Ebb	Surface	1	08:55	8.76	8.19	31.2	29.49	2.93	2.5
B1	20220822	Sunny	Moderate	Mid-Ebb	Surface	1	08:55	8.75	8.2	31.14	29.44	3.23	2.5
B1	20220822	Sunny	Moderate	Mid-Ebb	Bottom	4.2	08:54	8.85	8.2	31.11	29.43	3.71	4
B1	20220822	Sunny	Moderate	Mid-Ebb	Bottom	4.2	08:54	8.86	8.18	31.28	29.39	3.59	2.5
B2	20220822	Sunny	Moderate	Mid-Ebb	Surface	1	09:11	9.08	8.15	30.53	29.12	3.37	3
B2	20220822	Sunny	Moderate	Mid-Ebb	Surface	1	09:11	8.97	8.19	30.65	29.33	3.42	2.5
B2	20220822	Sunny	Moderate	Mid-Ebb	Bottom	4.2	09:10	9	8.17	30.61	29.16	3.86	2.5
B2	20220822	Sunny	Moderate	Mid-Ebb	Bottom	4.2	09:10	9.12	8.2	30.56	29.18	3.8	2.5
В3	20220822	Sunny	Moderate	Mid-Ebb	Surface	1	10:42	8.78	8.07	31.17	29.09	4.71	2.5
В3	20220822	Sunny	Moderate	Mid-Ebb	Surface	1	10:42	8.91	8	31.02	29.24	5.04	2.5
В3	20220822	Sunny	Moderate	Mid-Ebb	Bottom	4.3	10:41	8.93	8.07	31.18	29.02	6.1	2.5
В3	20220822	Sunny	Moderate	Mid-Ebb	Bottom	4.3	10:41	8.9	8.02	31.06	29.06	5.86	2.5
B4	20220822	Sunny	Moderate	Mid-Ebb	Surface	1	10:27	9.4	8.1	31.22	29.56	4.05	2.5
B4	20220822	Sunny	Moderate	Mid-Ebb	Surface	1	10:27	9.36	8.14	31.01	29.51	4.2	2.5
B4	20220822	Sunny	Moderate	Mid-Ebb	Bottom	3.1	10:26	9.33	8.09	31.05	29.39	4.58	2.5
B4	20220822	Sunny	Moderate	Mid-Ebb	Bottom	3.1	10:26	9.38	8.15	31.04	29.45	4.47	2.5
C1A	20220822	Sunny	Moderate	Mid-Ebb	Surface	1	08:26	8.24	8.09	31.45	29.38	6.18	2.5
C1A	20220822	Sunny	Moderate	Mid-Ebb	Surface	1	08:26	8.27	8.07	31.48	29.34	6.34	2.5
C1A	20220822	Sunny	Moderate	Mid-Ebb	Middle	5.05	08:25	8.2	8.1	31.47	29.32	6.7	2.5
C1A	20220822	Sunny	Moderate	Mid-Ebb	Middle	5.05	08:25	8.24	8.08	31.48	29.45	6.42	2.5
C1A	20220822	Sunny	Moderate	Mid-Ebb	Bottom	9.1	08:24	8.26	8.07	31.43	29.32	7.38	2.5
C1A	20220822	Sunny	Moderate	Mid-Ebb	Bottom	9.1	08:24	8.26	8.11	31.39	29.38	7.21	2.5

Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
C2A	20220822	Sunny	Moderate	Mid-Ebb	Surface	1	10:26	9.02	8.1	30.37	29.53	5.42	2.5
C2A	20220822	Sunny	Moderate	Mid-Ebb	Surface	1	10:26	9.18	8.1	30.3	29.52	5.33	4
C2A	20220822	Sunny	Moderate	Mid-Ebb	Middle	5.9	10:25	9.09	8.11	30.2	29.56	5.83	2.5
C2A	20220822	Sunny	Moderate	Mid-Ebb	Middle	5.9	10:25	9.18	8.09	30.26	29.63	5.79	2.5
C2A	20220822	Sunny	Moderate	Mid-Ebb	Bottom	10.8	10:24	9.07	8.1	30.35	29.61	5.92	2.5
C2A	20220822	Sunny	Moderate	Mid-Ebb	Bottom	10.8	10:24	9.09	8.08	30.17	29.45	6.07	2.5
CR1	20220822	Sunny	Moderate	Mid-Ebb	Surface	1	10:06	8.54	8.16	30.68	29.49	4.2	2.5
CR1	20220822	Sunny	Moderate	Mid-Ebb	Surface	1	10:06	8.33	8.16	30.85	29.58	3.83	2.5
CR1	20220822	Sunny	Moderate	Mid-Ebb	Middle	6.45	10:05	8.48	8.15	30.86	29.48	4.44	2.5
CR1	20220822	Sunny	Moderate	Mid-Ebb	Middle	6.45	10:05	8.66	8.13	30.85	29.4	4.05	2.5
CR1	20220822	Sunny	Moderate	Mid-Ebb	Bottom	11.9	10:04	8.37	8.16	30.79	29.58	5.2	2.5
CR1	20220822	Sunny	Moderate	Mid-Ebb	Bottom	11.9	10:04	8.5	8.11	30.68	29.4	4.83	3
CR2	20220822	Sunny	Moderate	Mid-Ebb	Surface	1	09:51	8.74	8.21	30.62	29.33	5.9	3
CR2	20220822	Sunny	Moderate	Mid-Ebb	Surface	1	09:51	8.68	8.21	30.65	29.26	5.77	2.5
CR2	20220822	Sunny	Moderate	Mid-Ebb	Middle	5.5	09:50	8.81	8.19	30.68	29.24	5.04	2.5
CR2	20220822	Sunny	Moderate	Mid-Ebb	Middle	5.5	09:50	8.71	8.19	30.52	29.18	5.35	2.5
CR2	20220822	Sunny	Moderate	Mid-Ebb	Bottom	10	09:49	8.83	8.16	30.57	29.36	6.09	2.5
CR2	20220822	Sunny	Moderate	Mid-Ebb	Bottom	10	09:49	8.8	8.18	30.46	29.35	5.89	4
F1A	20220822	Sunny	Moderate	Mid-Ebb	Surface	1	10:01	8.27	8.15	30.76	29.07	5.05	2.5
F1A	20220822	Sunny	Moderate	Mid-Ebb	Surface	1	10:01	8.27	8.16	30.82	29.15	4.49	2.5
F1A	20220822	Sunny	Moderate	Mid-Ebb	Middle	4.25	10:00	8.23	8.18	30.65	29.21	4.43	2.5
F1A	20220822	Sunny	Moderate	Mid-Ebb	Middle	4.25	10:00	8.27	8.19	30.66	29.19	4.54	2.5
F1A	20220822	Sunny	Moderate	Mid-Ebb	Bottom	7.5	09:59	8.24	8.16	30.81	29.1	4.55	2.5
F1A	20220822	Sunny	Moderate	Mid-Ebb	Bottom	7.5	09:59	8.27	8.16	30.87	29.08	4.94	2.5
H1	20220822	Sunny	Moderate	Mid-Ebb	Surface	1	09:37	9.46	8	30.95	29.32	4.03	2.5
H1	20220822	Sunny	Moderate	Mid-Ebb	Surface	1	09:37	9.45	8.02	30.84	29.21	4.7	2.5
H1	20220822	Sunny	Moderate	Mid-Ebb	Middle	4.1	09:36	9.38	7.98	30.93	29.24	3.84	2.5
H1	20220822	Sunny	Moderate	Mid-Ebb	Middle	4.1	09:36	9.42	8.02	30.91	29.26	4.4	2.5
H1	20220822	Sunny	Moderate	Mid-Ebb	Bottom	7.2	09:35	9.42	8.05	30.86	29.38	4.21	2.5
H1	20220822	Sunny	Moderate	Mid-Ebb	Bottom	7.2	09:35	9.44	8.04	30.92	29.36	4.55	2.5
M1	20220822	Sunny	Moderate	Mid-Ebb	Surface	1	09:36	8.33	8.13	31	29.27	4.19	2.5
M1	20220822	Sunny	Moderate	Mid-Ebb	Surface	1	09:36	8.45	8.14	31.06	29.28	4.92	2.5
M1	20220822	Sunny	Moderate	Mid-Ebb	Middle	4.75	09:35	8.42	8.14	31.14	29.26	4.48	2.5
M1	20220822	Sunny	Moderate	Mid-Ebb	Middle	4.75	09:35	8.7	8.12	31.11	29.3	4.39	2.5
M1	20220822	Sunny	Moderate	Mid-Ebb	Bottom	8.5	09:34	8.6	8.08	31.09	29.12	4.69	3
M1	20220822	Sunny	Moderate	Mid-Ebb	Bottom	8.5	09:34	8.56	8.07	31	29.25	4.91	3
B1	20220822	Sunny	Moderate	Mid-Flood	Surface	1	15:55	8.93	8.02	31.52	29.49	3.68	2.5
B1	20220822	Sunny	Moderate	Mid-Flood	Surface	1	15:55	8.8	8.03	31.61	29.42	4.05	2.5
B1	20220822	Sunny	Moderate	Mid-Flood	Bottom	4.1	15:54	8.78	8.02	31.59	29.53	4.09	2.5
B1	20220822	Sunny	Moderate	Mid-Flood	Bottom	4.1	15:54	8.9	7.98	31.48	29.51	3.98	3
B2	20220822	Sunny	Moderate	Mid-Flood	Surface	1	16:10	8.77	8.07	30.37	29.51	4.38	2.5

Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
B2	20220822	Sunny	Moderate	Mid-Flood	Surface	1	16:10	8.71	8.11	30.32	29.59	4.21	2.5
B2	20220822	Sunny	Moderate	Mid-Flood	Bottom	4	16:09	8.81	8.12	30.47	29.46	4.53	2.5
B2	20220822	Sunny	Moderate	Mid-Flood	Bottom	4	16:09	8.76	8.1	30.49	29.56	4.14	2.5
В3	20220822	Sunny	Moderate	Mid-Flood	Surface	1	15:43	8.31	8.02	30.59	29.55	5.23	2.5
В3	20220822	Sunny	Moderate	Mid-Flood	Surface	1	15:43	8.27	8.03	30.53	29.58	5.34	2.5
В3	20220822	Sunny	Moderate	Mid-Flood	Bottom	3.5	15:42	8.46	8	30.63	29.62	5.92	2.5
В3	20220822	Sunny	Moderate	Mid-Flood	Bottom	3.5	15:42	8.43	8.02	30.72	29.52	5.87	2.5
B4	20220822	Sunny	Moderate	Mid-Flood	Surface	1	15:54	9.28	8.08	31.74	29.58	4.11	2.5
B4	20220822	Sunny	Moderate	Mid-Flood	Surface	1	15:54	9.2	8.11	31.57	29.67	4.44	3
B4	20220822	Sunny	Moderate	Mid-Flood	Bottom	4.4	15:53	9.24	8.1	31.74	29.57	4.97	3
B4	20220822	Sunny	Moderate	Mid-Flood	Bottom	4.4	15:53	9.14	8.12	31.81	29.56	4.48	2.5
C1A	20220822	Sunny	Moderate	Mid-Flood	Surface	1	15:32	8.2	8.2	30.1	29.21	5.72	3
C1A	20220822	Sunny	Moderate	Mid-Flood	Surface	1	15:32	8.19	8.16	30.16	29.25	5.49	2.5
C1A	20220822	Sunny	Moderate	Mid-Flood	Middle	5	15:31	8.2	8.17	30.05	29.24	5.98	3
C1A	20220822	Sunny	Moderate	Mid-Flood	Middle	5	15:31	8.25	8.18	29.98	29.29	5.88	2.5
C1A	20220822	Sunny	Moderate	Mid-Flood	Bottom	9	15:30	8.34	8.15	30.21	29.2	6.93	2.5
C1A	20220822	Sunny	Moderate	Mid-Flood	Bottom	9	15:30	8.19	8.15	30.04	29.32	6.58	2.5
C2A	20220822	Sunny	Moderate	Mid-Flood	Surface	1	15:32	9.62	8.03	31.37	29.48	7.12	4
C2A	20220822	Sunny	Moderate	Mid-Flood	Surface	1	15:32	9.66	8.02	31.35	29.41	7.59	2.5
C2A	20220822	Sunny	Moderate	Mid-Flood	Middle	5.9	15:31	9.71	8.04	31.29	29.56	7.63	2.5
C2A	20220822	Sunny	Moderate	Mid-Flood	Middle	5.9	15:31	9.63	8.01	31.17	29.46	8.01	2.5
C2A	20220822	Sunny	Moderate	Mid-Flood	Bottom	10.8	15:30	9.68	8.05	31.35	29.51	7.96	2.5
C2A	20220822	Sunny	Moderate	Mid-Flood	Bottom	10.8	15:30	9.74	8.08	31.13	29.4	8.22	3
CR1	20220822	Sunny	Moderate	Mid-Flood	Surface	1	17:05	8.51	8.05	30.88	29.48	7.01	2.5
CR1	20220822	Sunny	Moderate	Mid-Flood	Surface	1	17:05	8.49	8.09	30.94	29.43	6.47	2.5
CR1	20220822	Sunny	Moderate	Mid-Flood	Middle	6.15	17:04	8.52	8.09	30.95	29.46	7.23	3
CR1	20220822	Sunny	Moderate	Mid-Flood	Middle	6.15	17:04	8.5	8.07	30.94	29.55	6.27	2.5
CR1	20220822	Sunny	Moderate	Mid-Flood	Bottom	11.3	17:03	8.68	8.08	30.99	29.55	6.68	2.5
CR1	20220822	Sunny	Moderate	Mid-Flood	Bottom	11.3	17:03	8.51	8.11	30.99	29.53	7.03	2.5
CR2	20220822	Sunny	Moderate	Mid-Flood	Surface	1	18:50	8.97	8.08	30.12	29.58	5.71	2.5
CR2	20220822	Sunny	Moderate	Mid-Flood	Surface	1	18:50	9.12	8.04	30.14	29.54	5.48	2.5
CR2	20220822	Sunny	Moderate	Mid-Flood	Middle	5.65	18:49	9.03	8.05	30.31	29.48	6.03	2.5
CR2	20220822	Sunny	Moderate	Mid-Flood	Middle	5.65	18:49	8.99	8.02	30.31	29.44	6.14	2.5
CR2	20220822	Sunny	Moderate	Mid-Flood	Bottom	10.3	18:48	9.06	8.1	30.21	29.51	6.65	2.5
CR2	20220822	Sunny	Moderate	Mid-Flood	Bottom	10.3	18:48	8.97	8.1	30.1	29.49	6.3	2.5
F1A	20220822	Sunny	Moderate	Mid-Flood	Surface	1	16:19	9.6	8.06	30.96	29.31	5.64	2.5
F1A	20220822	Sunny	Moderate	Mid-Flood	Surface	1	16:19	9.73	8.09	30.95	29.21	5.44	2.5
F1A	20220822	Sunny	Moderate	Mid-Flood	Middle	4.2	16:18	9.71	8.1	30.92	29.17	5.36	2.5
F1A	20220822	Sunny	Moderate	Mid-Flood	Middle	4.2	16:18	9.55	8.05	30.89	29.21	5.98	2.5
F1A	20220822	Sunny	Moderate	Mid-Flood	Bottom	7.4	16:17	9.75	8.06	30.72	29.3	6.29	2.5
F1A	20220822	Sunny	Moderate	Mid-Flood	Bottom	7.4	16:17	9.72	8.09	30.84	29.29	5.55	2.5

Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
H1	20220822	Sunny	Moderate	Mid-Flood	Surface	1	16:38	9.58	8.17	30.76	29.21	5.29	2.5
H1	20220822	Sunny	Moderate	Mid-Flood	Surface	1	16:38	9.64	8.14	30.72	29.26	4.82	2.5
H1	20220822	Sunny	Moderate	Mid-Flood	Middle	4.1	16:37	9.59	8.17	30.91	29.28	4.89	4
H1	20220822	Sunny	Moderate	Mid-Flood	Middle	4.1	16:37	9.68	8.19	30.8	29.21	5.41	2.5
H1	20220822	Sunny	Moderate	Mid-Flood	Bottom	7.2	16:36	9.57	8.16	30.92	29.15	5.27	2.5
H1	20220822	Sunny	Moderate	Mid-Flood	Bottom	7.2	16:36	9.53	8.18	30.89	29.18	5.55	3
M1	20220822	Sunny	Moderate	Mid-Flood	Surface	1	16:44	9.03	8.16	31.37	29.33	3.86	2.5
M1	20220822	Sunny	Moderate	Mid-Flood	Surface	1	16:44	9.11	8.16	31.35	29.16	3.75	2.5
M1	20220822	Sunny	Moderate	Mid-Flood	Middle	3.9	16:43	9.06	8.15	31.39	29.26	4.65	2.5
M1	20220822	Sunny	Moderate	Mid-Flood	Middle	3.9	16:43	9.04	8.16	31.47	29.31	4.38	2.5
M1	20220822	Sunny	Moderate	Mid-Flood	Bottom	6.8	16:42	9.09	8.16	31.39	29.23	4.69	2.5
M1	20220822	Sunny	Moderate	Mid-Flood	Bottom	6.8	16:42	9.22	8.11	31.39	29.27	5	2.5
B1	20220824	Sunny	Moderate	Mid-Ebb	Surface	1	09:31	8.66	8	31.14	29.1	3.41	3
B1	20220824	Sunny	Moderate	Mid-Ebb	Surface	1	09:31	8.37	7.99	31.07	29.08	3.58	2.5
B1	20220824	Sunny	Moderate	Mid-Ebb	Bottom	3.6	09:30	8.8	7.98	31.16	29.16	3.21	2.5
B1	20220824	Sunny	Moderate	Mid-Ebb	Bottom	3.6	09:30	8.44	8	31.02	29.11	3.58	4
B2	20220824	Sunny	Moderate	Mid-Ebb	Surface	1	09:47	9.22	8	31.17	28.92	3.21	2.5
B2	20220824	Sunny	Moderate	Mid-Ebb	Surface	1	09:47	9.08	8	31.43	28.99	2.98	3
B2	20220824	Sunny	Moderate	Mid-Ebb	Bottom	4.9	09:46	9.17	7.98	31.28	28.74	3.42	4
B2	20220824	Sunny	Moderate	Mid-Ebb	Bottom	4.9	09:46	9.13	8	31.36	29.02	3.47	3
В3	20220824	Sunny	Moderate	Mid-Ebb	Surface	1	11:01	9.2	8.07	31.5	29.29	3.91	2.5
В3	20220824	Sunny	Moderate	Mid-Ebb	Surface	1	11:01	9.25	8.12	31.44	29.19	3.63	2.5
В3	20220824	Sunny	Moderate	Mid-Ebb	Bottom	4.5	11:00	9.3	8.08	31.51	29.09	4.56	6
В3	20220824	Sunny	Moderate	Mid-Ebb	Bottom	4.5	11:00	9.22	8.1	31.37	29.28	4.28	3
B4	20220824	Sunny	Moderate	Mid-Ebb	Surface	1	10:51	8.61	8.18	30.94	29.25	4.34	2.5
B4	20220824	Sunny	Moderate	Mid-Ebb	Surface	1	10:51	8.49	8.13	30.94	29.06	4.3	4
B4	20220824	Sunny	Moderate	Mid-Ebb	Bottom	3.8	10:50	8.18	8.15	30.85	29.28	4.8	6
B4	20220824	Sunny	Moderate	Mid-Ebb	Bottom	3.8	10:50	8.24	8.17	30.89	29.06	4.49	7
C1A	20220824	Sunny	Moderate	Mid-Ebb	Surface	1	09:05	9.36	8.2	31.2	28.98	4.95	2.5
C1A	20220824	Sunny	Moderate	Mid-Ebb	Surface	1	09:05	9.31	8.19	31.26	28.82	5.19	3
C1A	20220824	Sunny	Moderate	Mid-Ebb	Middle	5.15	09:04	9.18	8.14	31.28	28.96	5.63	3
C1A	20220824	Sunny	Moderate	Mid-Ebb	Middle	5.15	09:04	9.22	8.18	31.31	29.02	5.38	3
C1A	20220824	Sunny	Moderate	Mid-Ebb	Bottom	9.3	09:03	9.29	8.15	31.43	28.93	5.67	6
C1A	20220824	Sunny	Moderate	Mid-Ebb	Bottom	9.3	09:03	9.16	8.13	31.28	28.78	5.84	8
C2A	20220824	Sunny	Moderate	Mid-Ebb	Surface	1	11:01	8.46	8.14	31.07	28.97	3.82	6
C2A	20220824	Sunny	Moderate	Mid-Ebb	Surface	1	11:01	8.4	8.15	30.9	28.8	3.71	6
C2A	20220824	Sunny	Moderate	Mid-Ebb	Middle	5.8	11:00	8.91	8.13	30.84	29.04	4.23	9
C2A	20220824	Sunny	Moderate	Mid-Ebb	Middle	5.8	11:00	8.59	8.09	31.07	28.89	4.05	5
C2A	20220824	Sunny	Moderate	Mid-Ebb	Bottom	10.6	10:59	8.47	8.14	30.96	29.04	4.71	2.5
C2A	20220824	Sunny	Moderate	Mid-Ebb	Bottom	10.6	10:59	8.81	8.09	31.03	28.89	4.16	2.5
CR1	20220824	Sunny	Moderate	Mid-Ebb	Surface	1	10:41	9.35	8.02	31.07	29.07	3.86	2.5

Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
CR1	20220824	Sunny	Moderate	Mid-Ebb	Surface	1	10:41	9.32	8.02	31.05	29.04	3.8	2.5
CR1	20220824	Sunny	Moderate	Mid-Ebb	Middle	6.65	10:40	9.32	8.08	31.09	29.06	3.96	2.5
CR1	20220824	Sunny	Moderate	Mid-Ebb	Middle	6.65	10:40	9.35	8.07	31.01	28.79	3.47	4
CR1	20220824	Sunny	Moderate	Mid-Ebb	Bottom	12.3	10:39	9.25	8.04	30.99	29	3.98	5
CR1	20220824	Sunny	Moderate	Mid-Ebb	Bottom	12.3	10:39	9.44	8	31.16	28.75	4.46	4
CR2	20220824	Sunny	Moderate	Mid-Ebb	Surface	1	10:26	8.42	8.06	30.82	28.92	3.98	3
CR2	20220824	Sunny	Moderate	Mid-Ebb	Surface	1	10:26	8.35	8.14	30.83	28.89	3.86	3
CR2	20220824	Sunny	Moderate	Mid-Ebb	Middle	5.95	10:25	8.33	8.1	30.96	28.97	4.13	2.5
CR2	20220824	Sunny	Moderate	Mid-Ebb	Middle	5.95	10:25	8.44	8.06	30.85	28.87	4.08	3
CR2	20220824	Sunny	Moderate	Mid-Ebb	Bottom	10.9	10:24	8.24	8.14	31	29.07	4.65	3
CR2	20220824	Sunny	Moderate	Mid-Ebb	Bottom	10.9	10:24	8.16	8.05	30.95	29.07	4.33	2.5
F1A	20220824	Sunny	Moderate	Mid-Ebb	Surface	1	10:28	9.13	8.17	32.05	29.04	3.9	3
F1A	20220824	Sunny	Moderate	Mid-Ebb	Surface	1	10:28	9.05	8.14	32.04	28.88	3.65	2.5
F1A	20220824	Sunny	Moderate	Mid-Ebb	Middle	4.5	10:27	9.23	8.2	32.11	29.1	4.05	4
F1A	20220824	Sunny	Moderate	Mid-Ebb	Middle	4.5	10:27	8.87	8.15	32.04	29.17	3.9	3
F1A	20220824	Sunny	Moderate	Mid-Ebb	Bottom	8	10:26	8.77	8.19	32.01	29.18	4.38	5
F1A	20220824	Sunny	Moderate	Mid-Ebb	Bottom	8	10:26	8.84	8.17	32.13	29.11	4.24	4
H1	20220824	Sunny	Moderate	Mid-Ebb	Surface	1	10:13	8.51	8.02	32.57	29.08	3.37	2.5
H1	20220824	Sunny	Moderate	Mid-Ebb	Surface	1	10:13	8.41	8.05	32.44	29.33	3.12	2.5
H1	20220824	Sunny	Moderate	Mid-Ebb	Middle	4.05	10:12	8.33	8.06	32.58	29.27	3.65	12
H1	20220824	Sunny	Moderate	Mid-Ebb	Middle	4.05	10:12	8.36	8.03	32.56	29.1	3.69	12
H1	20220824	Sunny	Moderate	Mid-Ebb	Bottom	7.1	10:11	8.33	8.02	32.63	29.21	4.24	2.5
H1	20220824	Sunny	Moderate	Mid-Ebb	Bottom	7.1	10:11	8.59	8.04	32.47	29.11	3.92	2.5
M1	20220824	Sunny	Moderate	Mid-Ebb	Surface	1	10:03	9.22	8.04	30.87	29	3.93	2.5
M1	20220824	Sunny	Moderate	Mid-Ebb	Surface	1	10:03	9.34	8.05	30.98	29.25	3.72	3
M1	20220824	Sunny	Moderate	Mid-Ebb	Middle	4.4	10:02	9.19	8.12	30.85	29.31	4.36	3
M1	20220824	Sunny	Moderate	Mid-Ebb	Middle	4.4	10:02	9.14	8.13	31.05	29.32	3.92	3
M1	20220824	Sunny	Moderate	Mid-Ebb	Bottom	7.8	10:01	9.25	8.07	31.04	29.28	4.37	3
M1	20220824	Sunny	Moderate	Mid-Ebb	Bottom	7.8	10:01	9.23	8.12	31.05	29.25	4.49	2.5
B1	20220826	Sunny	Moderate	Mid-Ebb	Surface	1	10:42	9.08	8.11	31.42	28.66	4.21	2.5
B1	20220826	Sunny	Moderate	Mid-Ebb	Surface	1	10:42	9.08	8.15	31.5	28.63	4.12	2.5
B1	20220826	Sunny	Moderate	Mid-Ebb	Bottom	4.1	10:41	9.19	8.08	31.37	28.71	4.46	2.5
B1	20220826	Sunny	Moderate	Mid-Ebb	Bottom	4.1	10:41	8.84	8.13	31.63	28.84	4.37	2.5
B2	20220826	Sunny	Moderate	Mid-Ebb	Surface	1	10:58	8.71	8.08	31.96	28.68	4.13	2.5
B2	20220826	Sunny	Moderate	Mid-Ebb	Surface	1	10:58	8.58	8.08	31.79	28.84	4.53	2.5
B2	20220826	Sunny	Moderate	Mid-Ebb	Bottom	4.9	10:57	8.55	8.16	31.75	28.72	4.63	3
B2	20220826	Sunny	Moderate	Mid-Ebb	Bottom	4.9	10:57	8.5	8.14	31.88	28.86	4.69	2.5
В3	20220826	Sunny	Moderate	Mid-Ebb	Surface	1	12:43	9.13	8.25	31.72	28.84	5.46	2.5
В3	20220826	Sunny	Moderate	Mid-Ebb	Surface	1	12:43	9.19	8.23	32	28.75	5.68	3
В3	20220826	Sunny	Moderate	Mid-Ebb	Bottom	4	12:42	9.09	8.24	31.78	28.76	5.87	2.5
В3	20220826	Sunny	Moderate	Mid-Ebb	Bottom	4	12:42	8.91	8.23	31.98	28.64	5.93	2.5

Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
B4	20220826	Sunny	Moderate	Mid-Ebb	Surface	1	12:31	8.59	8.24	31.93	28.71	5.76	2.5
B4	20220826	Sunny	Moderate	Mid-Ebb	Surface	1	12:31	8.45	8.19	31.92	28.63	5.47	2.5
B4	20220826	Sunny	Moderate	Mid-Ebb	Bottom	4.1	12:30	8.65	8.24	31.78	28.69	6.12	2.5
B4	20220826	Sunny	Moderate	Mid-Ebb	Bottom	4.1	12:30	8.44	8.22	31.74	28.75	5.98	3
C1A	20220826	Sunny	Moderate	Mid-Ebb	Surface	1	10:21	8.76	8.24	31.81	28.64	7.01	2.5
C1A	20220826	Sunny	Moderate	Mid-Ebb	Surface	1	10:21	8.48	8.24	31.94	28.64	7.28	2.5
C1A	20220826	Sunny	Moderate	Mid-Ebb	Middle	5.2	10:20	8.56	8.21	32.02	28.49	7.63	2.5
C1A	20220826	Sunny	Moderate	Mid-Ebb	Middle	5.2	10:20	8.49	8.25	31.85	28.54	7.82	2.5
C1A	20220826	Sunny	Moderate	Mid-Ebb	Bottom	9.4	10:19	8.46	8.23	31.79	28.67	8.17	2.5
C1A	20220826	Sunny	Moderate	Mid-Ebb	Bottom	9.4	10:19	8.63	8.25	31.72	28.67	8.16	2.5
C2A	20220826	Sunny	Moderate	Mid-Ebb	Surface	1	12:09	8.26	8.12	31.28	28.55	6.48	2.5
C2A	20220826	Sunny	Moderate	Mid-Ebb	Surface	1	12:09	8.46	8.15	31.16	28.59	6.49	2.5
C2A	20220826	Sunny	Moderate	Mid-Ebb	Middle	6.05	12:08	8.43	8.17	31.19	28.45	6.85	2.5
C2A	20220826	Sunny	Moderate	Mid-Ebb	Middle	6.05	12:08	8.31	8.16	31.38	28.53	6.6	2.5
C2A	20220826	Sunny	Moderate	Mid-Ebb	Bottom	11.1	12:07	8.33	8.14	31.36	28.48	7.45	3
C2A	20220826	Sunny	Moderate	Mid-Ebb	Bottom	11.1	12:07	8.34	8.08	31.09	28.51	6.91	4
CR1	20220826	Sunny	Moderate	Mid-Ebb	Surface	1	11:51	8.32	8.26	30.53	28.74	5.64	2.5
CR1	20220826	Sunny	Moderate	Mid-Ebb	Surface	1	11:51	8.37	8.25	30.68	28.59	4.91	2.5
CR1	20220826	Sunny	Moderate	Mid-Ebb	Middle	6.75	11:50	8.3	8.24	30.42	28.61	5.99	2.5
CR1	20220826	Sunny	Moderate	Mid-Ebb	Middle	6.75	11:50	8.43	8.23	30.48	28.53	5.34	2.5
CR1	20220826	Sunny	Moderate	Mid-Ebb	Bottom	12.5	11:49	8.3	8.24	30.38	28.67	5.61	3
CR1	20220826	Sunny	Moderate	Mid-Ebb	Bottom	12.5	11:49	8.31	8.25	30.45	28.64	5.48	2.5
CR2	20220826	Sunny	Moderate	Mid-Ebb	Surface	1	11:37	9.11	8.26	31.77	29.11	4.76	2.5
CR2	20220826	Sunny	Moderate	Mid-Ebb	Surface	1	11:37	8.9	8.26	31.76	28.87	4.85	2.5
CR2	20220826	Sunny	Moderate	Mid-Ebb	Middle	5.55	11:36	8.9	8.23	31.65	29.11	5.46	2.5
CR2	20220826	Sunny	Moderate	Mid-Ebb	Middle	5.55	11:36	8.97	8.26	31.98	29.06	5.3	2.5
CR2	20220826	Sunny	Moderate	Mid-Ebb	Bottom	10.1	11:35	9.18	8.22	32.04	29.08	5.98	2.5
CR2	20220826	Sunny	Moderate	Mid-Ebb	Bottom	10.1	11:35	9.01	8.24	31.73	28.93	5.54	3
F1A	20220826	Sunny	Moderate	Mid-Ebb	Surface	1	11:55	8.93	8.19	30.53	29.13	5.68	2.5
F1A	20220826	Sunny	Moderate	Mid-Ebb	Surface	1	11:55	8.89	8.19	30.61	29.11	5.96	2.5
F1A	20220826	Sunny	Moderate	Mid-Ebb	Middle	4	11:54	9.1	8.19	30.48	28.98	6.56	2.5
F1A	20220826	Sunny	Moderate	Mid-Ebb	Middle	4	11:54	8.84	8.16	30.57	29.08	6.43	2.5
F1A	20220826	Sunny	Moderate	Mid-Ebb	Bottom	7	11:53	8.87	8.11	30.7	29.07	7.02	2.5
F1A	20220826	Sunny	Moderate	Mid-Ebb	Bottom	7	11:53	8.84	8.16	30.68	29.08	6.41	2.5
H1	20220826	Sunny	Moderate	Mid-Ebb	Surface	1	11:24	8.95	8.26	31.88	28.41	4.78	2.5
Н1	20220826	Sunny	Moderate	Mid-Ebb	Surface	1	11:24	8.79	8.24	31.86	28.63	4.67	2.5
H1	20220826	Sunny	Moderate	Mid-Ebb	Middle	4.3	11:23	8.68	8.24	31.91	28.61	5.33	2.5
H1	20220826	Sunny	Moderate	Mid-Ebb	Middle	4.3	11:23	8.82	8.25	31.93	28.61	5.12	2.5
H1	20220826	Sunny	Moderate	Mid-Ebb	Bottom	7.6	11:22	9.03	8.24	32.05	28.53	5.83	2.5
H1	20220826	Sunny	Moderate	Mid-Ebb	Bottom	7.6	11:22	9.03	8.26	31.97	28.56	5.53	2.5
M1	20220826	Sunny	Moderate	Mid-Ebb	Surface	1	11:30	9.05	8.15	30.38	28.72	5.02	2.5

Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
M1	20220826	Sunny	Moderate	Mid-Ebb	Surface	1	11:30	9.01	8.18	30.43	28.71	4.91	2.5
M1	20220826	Sunny	Moderate	Mid-Ebb	Middle	4.65	11:29	8.86	8.13	30.26	28.58	5.3	2.5
M1	20220826	Sunny	Moderate	Mid-Ebb	Middle	4.65	11:29	8.84	8.08	30.14	28.68	5.24	2.5
M1	20220826	Sunny	Moderate	Mid-Ebb	Bottom	8.3	11:28	8.87	8.09	30.33	28.62	5.68	3
M1	20220826	Sunny	Moderate	Mid-Ebb	Bottom	8.3	11:28	9.1	8.09	30.29	28.78	5.5	3
B1	20220826	Sunny	Moderate	Mid-Flood	Surface	1	16:43	8.08	8.21	30.31	28.87	4.47	2.5
B1	20220826	Sunny	Moderate	Mid-Flood	Surface	1	16:43	8.3	8.15	30.14	28.99	4.33	2.5
B1	20220826	Sunny	Moderate	Mid-Flood	Bottom	4.1	16:42	8.18	8.16	30.12	28.92	4.71	4
B1	20220826	Sunny	Moderate	Mid-Flood	Bottom	4.1	16:42	8.36	8.17	30.01	28.91	4.81	3
B2	20220826	Sunny	Moderate	Mid-Flood	Surface	1	17:00	8.94	8.17	31.46	28.39	3.95	2.5
B2	20220826	Sunny	Moderate	Mid-Flood	Surface	1	17:00	8.87	8.21	31.4	28.5	4.08	2.5
B2	20220826	Sunny	Moderate	Mid-Flood	Bottom	3.9	16:59	8.74	8.17	31.46	28.49	4.66	6
B2	20220826	Sunny	Moderate	Mid-Flood	Bottom	3.9	16:59	8.69	8.21	31.44	28.38	4.37	4
B3	20220826	Sunny	Moderate	Mid-Flood	Surface	1	16:33	8.57	8.15	31.57	28.57	4.59	3
B3	20220826	Sunny	Moderate	Mid-Flood	Surface	1	16:33	8.28	8.13	31.42	28.55	4.83	2.5
B3	20220826	Sunny	Moderate	Mid-Flood	Bottom	3.5	16:32	8.5	8.1	31.26	28.65	5.6	2.5
B3	20220826	Sunny	Moderate	Mid-Flood	Bottom	3.5	16:32	8.31	8.2	31.51	28.65	5.42	2.5
B4	20220826	Sunny	Moderate	Mid-Flood	Surface	1	16:44	9.16	8.12	31.46	28.65	4.51	3
B4	20220826	Sunny	Moderate	Mid-Flood	Surface	1	16:44	9.18	8.18	31.58	28.6	4.45	2.5
B4	20220826	Sunny	Moderate	Mid-Flood	Bottom	4.5	16:43	9.17	8.15	31.64	28.78	4.97	2.5
B4	20220826	Sunny	Moderate	Mid-Flood	Bottom	4.5	16:43	9.19	8.14	31.37	28.63	4.61	3
C1A	20220826	Sunny	Moderate	Mid-Flood	Surface	1	16:21	9.12	8.2	31.22	28.66	5.67	2.5
C1A	20220826	Sunny	Moderate	Mid-Flood	Surface	1	16:21	8.9	8.16	31.03	28.59	5.84	2.5
C1A	20220826	Sunny	Moderate	Mid-Flood	Middle	5.95	16:20	8.89	8.22	31.07	28.59	6.06	2.5
C1A	20220826	Sunny	Moderate	Mid-Flood	Middle	5.95	16:20	8.82	8.16	31.1	28.57	6.09	2.5
C1A	20220826	Sunny	Moderate	Mid-Flood	Bottom	10.9	16:19	8.96	8.21	31.2	28.64	6.34	4
C1A	20220826	Sunny	Moderate	Mid-Flood	Bottom	10.9	16:19	9.12	8.15	31.15	28.66	6.45	2.5
C2A	20220826	Sunny	Moderate	Mid-Flood	Surface	1	16:21	7.68	8.23	31.55	28.73	6.55	2.5
C2A	20220826	Sunny	Moderate	Mid-Flood	Surface	1	16:21	7.87	8.24	31.32	28.79	6.21	2.5
C2A	20220826	Sunny	Moderate	Mid-Flood	Middle	6	16:20	7.92	8.24	31.69	28.8	6.78	2.5
C2A	20220826	Sunny	Moderate	Mid-Flood	Middle	6	16:20	8	8.22	31.55	28.82	6.65	3
C2A	20220826	Sunny	Moderate	Mid-Flood	Bottom	11	16:19	7.85	8.24	31.3	28.78	7.18	3
C2A	20220826	Sunny	Moderate	Mid-Flood	Bottom	11	16:19	7.95	8.21	31.51	28.87	6.86	2.5
CR1	20220826	Sunny	Moderate	Mid-Flood	Surface	1	18:00	9.02	8.23	31.54	28.92	5.28	2.5
CR1	20220826	Sunny	Moderate	Mid-Flood	Surface	1	18:00	8.9	8.23	31.55	28.75	4.55	4
CR1	20220826	Sunny	Moderate	Mid-Flood	Middle	6.5	17:59	9.14	8.22	31.41	28.92	5.47	2.5
CR1	20220826	Sunny	Moderate	Mid-Flood	Middle	6.5	17:59	8.98	8.24	31.35	28.86	5.41	2.5
CR1	20220826	Sunny	Moderate	Mid-Flood	Bottom	12	17:58	9.23	8.22	31.57	28.8	5.66	2.5
CR1	20220826	Sunny	Moderate	Mid-Flood	Bottom	12	17:58	9.11	8.21	31.46	28.89	5.34	2.5
CR2	20220826	Sunny	Moderate	Mid-Flood	Surface	1	17:43	9.01	8.2	31.28	28.7	4.23	2.5
CR2	20220826	Sunny	Moderate	Mid-Flood	Surface	1	17:43	9.02	8.09	31.45	28.79	4.53	2.5

Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
CR2	20220826	Sunny	Moderate	Mid-Flood	Middle	5.75	17:42	9.12	8.22	31.53	28.86	5.44	2.5
CR2	20220826	Sunny	Moderate	Mid-Flood	Middle	5.75	17:42	9.27	8.22	31.59	28.86	5.24	3
CR2	20220826	Sunny	Moderate	Mid-Flood	Bottom	10.5	17:41	9.2	8.24	31.48	28.76	6.02	3
CR2	20220826	Sunny	Moderate	Mid-Flood	Bottom	10.5	17:41	9.25	8.24	31.3	28.84	6.08	2.5
F1A	20220826	Sunny	Moderate	Mid-Flood	Surface	1	17:10	8.36	7.97	31.53	28.93	4.68	2.5
F1A	20220826	Sunny	Moderate	Mid-Flood	Surface	1	17:10	8.37	8	31.67	28.82	4.26	2.5
F1A	20220826	Sunny	Moderate	Mid-Flood	Middle	4.3	17:09	8.36	8.03	31.53	28.98	4.04	3
F1A	20220826	Sunny	Moderate	Mid-Flood	Middle	4.3	17:09	8.35	7.98	31.66	28.96	4.38	2.5
F1A	20220826	Sunny	Moderate	Mid-Flood	Bottom	7.6	17:08	8.54	8.01	31.44	28.93	4.84	2.5
F1A	20220826	Sunny	Moderate	Mid-Flood	Bottom	7.6	17:08	8.4	8.06	31.34	28.94	4.73	2.5
H1	20220826	Sunny	Moderate	Mid-Flood	Surface	1	17:29	8.84	8.06	31.62	28.76	4.86	2.5
H1	20220826	Sunny	Moderate	Mid-Flood	Surface	1	17:29	8.94	8.03	31.57	28.74	4.32	2.5
H1	20220826	Sunny	Moderate	Mid-Flood	Middle	4.25	17:28	8.82	8.03	31.54	28.76	4.83	3
H1	20220826	Sunny	Moderate	Mid-Flood	Middle	4.25	17:28	8.87	7.98	31.59	28.72	4.27	2.5
H1	20220826	Sunny	Moderate	Mid-Flood	Bottom	7.5	17:27	9.15	8.04	31.46	28.58	5.1	2.5
H1	20220826	Sunny	Moderate	Mid-Flood	Bottom	7.5	17:27	8.84	8.06	31.36	28.72	4.58	3
M1	20220826	Sunny	Moderate	Mid-Flood	Surface	1	17:36	9.25	8.22	31.34	28.87	6.03	2.5
M1	20220826	Sunny	Moderate	Mid-Flood	Surface	1	17:36	9.2	8.23	31.47	28.8	5.17	2.5
M1	20220826	Sunny	Moderate	Mid-Flood	Middle	4.35	17:35	9.1	8.24	31.33	28.78	5.96	3
M1	20220826	Sunny	Moderate	Mid-Flood	Middle	4.35	17:35	9.25	8.24	31.31	28.84	6.15	2.5
M1	20220826	Sunny	Moderate	Mid-Flood	Bottom	7.7	17:34	9.03	8.21	31.62	28.92	5.9	2.5
M1	20220826	Sunny	Moderate	Mid-Flood	Bottom	7.7	17:34	9.25	8.23	31.29	28.78	6.31	2.5
B1	20220829	Cloudy	Moderate	Mid-Flood	Surface	1	09:30	9.48	8.13	32.42	29.58	5.01	2.5
B1	20220829	Cloudy	Moderate	Mid-Flood	Surface	1	09:30	9.36	8.16	32.12	29.58	4.93	4
B1	20220829	Cloudy	Moderate	Mid-Flood	Bottom	3.6	09:29	9.37	8.16	32.46	29.55	5.1	3
B1	20220829	Cloudy	Moderate	Mid-Flood	Bottom	3.6	09:29	9.37	8.19	32.16	29.58	5.29	5
B2	20220829	Cloudy	Moderate	Mid-Flood	Surface	1	09:47	8.21	8.02	31.89	29.42	5.36	3
B2	20220829	Cloudy	Moderate	Mid-Flood	Surface	1	09:47	8.29	8.04	32.58	29.45	5.39	2.5
B2	20220829	Cloudy	Moderate	Mid-Flood	Bottom	4.2	09:46	8.2	8	32.46	29.43	5.63	3
B2	20220829	Cloudy	Moderate	Mid-Flood	Bottom	4.2	09:46	8.23	8	32.68	29.42	5.84	2.5
В3	20220829	Cloudy	Moderate	Mid-Flood	Surface	1	10:01	9.66	7.89	32.3	29.26	5.79	2.5
В3	20220829	Cloudy	Moderate	Mid-Flood	Surface	1	10:01	9.69	7.9	32.37	29.2	5.56	2.5
В3	20220829	Cloudy	Moderate	Mid-Flood	Bottom	4.2	10:00	9.7	7.98	32.35	29.21	6.32	5
В3	20220829	Cloudy	Moderate	Mid-Flood	Bottom	4.2	10:00	9.65	7.95	32.19	29.23	6.06	3
В4	20220829	Cloudy	Moderate	Mid-Flood	Surface	1	09:52	9.25	8.12	30.95	29.41	5.35	4
В4	20220829	Cloudy	Moderate	Mid-Flood	Surface	1	09:52	9.35	8.14	30.9	29.38	5.38	2.5
В4	20220829	Cloudy	Moderate	Mid-Flood	Bottom	4	09:51	9.35	8.13	31.04	29.34	5.86	6
В4	20220829	Cloudy	Moderate	Mid-Flood	Bottom	4	09:51	9.36	8.15	31.12	29.44	5.56	4
C1A	20220829	Cloudy	Moderate	Mid-Flood	Surface	1	09:02	8.71	8.12	32.16	29.23	5.98	2.5
C1A	20220829	Cloudy	Moderate	Mid-Flood	Surface	1	09:02	8.79	8.16	32.42	29.23	5.87	4
C1A	20220829	Cloudy	Moderate	Mid-Flood	Middle	5.15	09:01	8.79	8.14	32.27	29.17	6.42	4

Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
C1A	20220829	Cloudy	Moderate	Mid-Flood	Middle	5.15	09:01	8.7	8.11	32.18	29.27	6.2	5
C1A	20220829	Cloudy	Moderate	Mid-Flood	Bottom	9.3	09:00	8.73	8.13	32.49	29.29	6.5	4
C1A	20220829	Cloudy	Moderate	Mid-Flood	Bottom	9.3	09:00	8.72	8.15	32.18	29.26	6.59	6
C2A	20220829	Cloudy	Moderate	Mid-Flood	Surface	1	08:02	9.95	8.19	32.03	29.47	6.67	2.5
C2A	20220829	Cloudy	Moderate	Mid-Flood	Surface	1	08:02	9.84	8.15	32.05	29.36	6.49	2.5
C2A	20220829	Cloudy	Moderate	Mid-Flood	Middle	5.95	08:01	9.88	8.15	31.98	29.48	6.86	4
C2A	20220829	Cloudy	Moderate	Mid-Flood	Middle	5.95	08:01	9.82	8.19	31.8	29.49	7.13	4
C2A	20220829	Cloudy	Moderate	Mid-Flood	Bottom	10.9	08:00	9.84	8.17	31.91	29.47	7.45	5
C2A	20220829	Cloudy	Moderate	Mid-Flood	Bottom	10.9	08:00	9.94	8.15	32.17	29.49	7.24	4
CR1	20220829	Cloudy	Moderate	Mid-Flood	Surface	1	08:17	9.69	7.99	31.99	29.1	4.99	4
CR1	20220829	Cloudy	Moderate	Mid-Flood	Surface	1	08:17	9.65	8.01	32.06	29.26	5.26	4
CR1	20220829	Cloudy	Moderate	Mid-Flood	Middle	6.1	08:16	9.67	7.98	32.06	29.13	5.18	5
CR1	20220829	Cloudy	Moderate	Mid-Flood	Middle	6.1	08:16	9.63	7.97	31.84	29.21	4.96	4
CR1	20220829	Cloudy	Moderate	Mid-Flood	Bottom	11.2	08:15	9.69	8.02	32.56	29.14	5.58	6
CR1	20220829	Cloudy	Moderate	Mid-Flood	Bottom	11.2	08:15	9.54	7.97	32.67	29.23	5.3	5
CR2	20220829	Cloudy	Moderate	Mid-Flood	Surface	1	08:31	8.8	8.13	31.93	29.14	4.91	4
CR2	20220829	Cloudy	Moderate	Mid-Flood	Surface	1	08:31	8.89	8.19	32.02	29.18	4.71	5
CR2	20220829	Cloudy	Moderate	Mid-Flood	Middle	5.75	08:30	8.87	8.16	32.15	29.13	5.22	5
CR2	20220829	Cloudy	Moderate	Mid-Flood	Middle	5.75	08:30	8.93	8.19	32.16	29.1	5.63	5
CR2	20220829	Cloudy	Moderate	Mid-Flood	Bottom	10.5	08:29	8.89	8.2	32.3	29.09	6.22	5
CR2	20220829	Cloudy	Moderate	Mid-Flood	Bottom	10.5	08:29	8.83	8.14	31.96	29.24	6.01	5
F1A	20220829	Cloudy	Moderate	Mid-Flood	Surface	1	09:25	9.38	8.15	32.53	29.38	4.83	6
F1A	20220829	Cloudy	Moderate	Mid-Flood	Surface	1	09:25	9.28	8.2	32.36	29.29	4.94	5
F1A	20220829	Cloudy	Moderate	Mid-Flood	Middle	4.1	09:24	9.35	8.15	32.26	29.39	5.17	4
F1A	20220829	Cloudy	Moderate	Mid-Flood	Middle	4.1	09:24	9.4	8.16	32.46	29.3	5.11	6
F1A	20220829	Cloudy	Moderate	Mid-Flood	Bottom	7.2	09:23	9.4	8.17	32.33	29.34	6.03	5
F1A	20220829	Cloudy	Moderate	Mid-Flood	Bottom	7.2	09:23	9.28	8.13	32.39	29.45	5.45	3
H1	20220829	Cloudy	Moderate	Mid-Flood	Surface	1	08:43	9.28	8.04	32.47	29.33	5.35	3
H1	20220829	Cloudy	Moderate	Mid-Flood	Surface	1	08:43	9.34	8.07	32.63	29.26	5.16	5
H1	20220829	Cloudy	Moderate	Mid-Flood	Middle	3.8	08:42	9.43	8.11	31.9	29.29	5.38	4
H1	20220829	Cloudy	Moderate	Mid-Flood	Middle	3.8	08:42	9.32	8.05	32.51	29.18	5.85	5
H1	20220829	Cloudy	Moderate	Mid-Flood	Bottom	6.6	08:41	9.34	8.13	32.58	29.32	5.71	2.5
H1	20220829	Cloudy	Moderate	Mid-Flood	Bottom	6.6	08:41	9.35	8.04	32.58	29.26	6.01	5
M1	20220829	Cloudy	Moderate	Mid-Flood	Surface	1	09:02	8.93	8.15	32.01	29.58	5.34	5
M1	20220829	Cloudy	Moderate	Mid-Flood	Surface	1	09:02	9.02	8.16	32.63	29.5	5.13	6
M1	20220829	Cloudy	Moderate	Mid-Flood	Middle	3.9	09:01	9.02	8.14	32.13	29.48	5.44	4
M1	20220829	Cloudy	Moderate	Mid-Flood	Middle	3.9	09:01	8.94	8.17	31.85	29.47	5.11	6
M1	20220829	Cloudy	Moderate	Mid-Flood	Bottom	6.8	09:00	9.09	8.14	31.85	29.49	5.69	4
M1	20220829	Cloudy	Moderate	Mid-Flood	Bottom	6.8	09:00	9.07	8.14	32.64	29.62	5.13	4
B1	20220829	Cloudy	Moderate	Mid-Ebb	Surface	1	12:15	8.49	8.1	32.14	29.49	4.85	5
B1	20220829	Cloudy	Moderate	Mid-Ebb	Surface	1	12:15	8.51	8.17	32.02	29.48	4.98	4

Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
B1	20220829	Cloudy	Moderate	Mid-Ebb	Bottom	4.2	12:14	8.54	8.14	32.24	29.56	4.91	4
B1	20220829	Cloudy	Moderate	Mid-Ebb	Bottom	4.2	12:14	8.54	8.17	32.27	29.51	5.04	4
B2	20220829	Cloudy	Moderate	Mid-Ebb	Surface	1	12:31	9.37	8.08	32.62	29.63	4.69	6
B2	20220829	Cloudy	Moderate	Mid-Ebb	Surface	1	12:31	9.32	8.09	32.57	29.52	4.32	6
B2	20220829	Cloudy	Moderate	Mid-Ebb	Bottom	4.1	12:30	9.42	8.12	32.59	29.51	4.63	5
B2	20220829	Cloudy	Moderate	Mid-Ebb	Bottom	4.1	12:30	9.4	8.06	32.51	29.53	4.79	5
B3	20220829	Cloudy	Moderate	Mid-Ebb	Surface	1	12:07	9.69	8.07	31.48	29.32	6.12	3
B3	20220829	Cloudy	Moderate	Mid-Ebb	Surface	1	12:07	9.69	8.04	31.79	29.34	6.47	6
B3	20220829	Cloudy	Moderate	Mid-Ebb	Bottom	3.7	12:06	9.57	8.03	31.59	29.26	6.15	5
B3	20220829	Cloudy	Moderate	Mid-Ebb	Bottom	3.7	12:06	9.64	8.03	31.58	29.37	6.51	5
B4	20220829	Cloudy	Moderate	Mid-Ebb	Surface	1	12:19	9.3	8.08	31.74	29.44	5.92	6
B4	20220829	Cloudy	Moderate	Mid-Ebb	Surface	1	12:19	9.24	8.11	31.61	29.45	5.58	3
B4	20220829	Cloudy	Moderate	Mid-Ebb	Bottom	3.3	12:18	9.33	8.14	31.61	29.39	5.92	3
B4	20220829	Cloudy	Moderate	Mid-Ebb	Bottom	3.3	12:18	9.19	8.08	31.81	29.31	5.82	5
C1A	20220829	Cloudy	Moderate	Mid-Ebb	Surface	1	11:55	9.49	8.21	32.64	29.4	6.83	7
C1A	20220829	Cloudy	Moderate	Mid-Ebb	Surface	1	11:55	9.47	8.21	32.46	29.38	6.74	4
C1A	20220829	Cloudy	Moderate	Mid-Ebb	Middle	4.65	11:54	9.36	8.19	32.63	29.4	7.09	4
C1A	20220829	Cloudy	Moderate	Mid-Ebb	Middle	4.65	11:54	9.41	8.18	32.65	29.43	7.14	2.5
C1A	20220829	Cloudy	Moderate	Mid-Ebb	Bottom	8.3	11:53	9.44	8.2	32.56	29.49	7.41	4
C1A	20220829	Cloudy	Moderate	Mid-Ebb	Bottom	8.3	11:53	9.48	8.21	32.61	29.48	7.33	2.5
C2A	20220829	Cloudy	Moderate	Mid-Ebb	Surface	1	11:55	8.75	8.02	31.57	29.21	5.66	4
C2A	20220829	Cloudy	Moderate	Mid-Ebb	Surface	1	11:55	8.9	8.05	31.68	29.2	5.73	4
C2A	20220829	Cloudy	Moderate	Mid-Ebb	Middle	6.1	11:54	8.86	7.96	31.77	29.2	6.13	2.5
C2A	20220829	Cloudy	Moderate	Mid-Ebb	Middle	6.1	11:54	8.75	7.97	31.61	29.27	5.99	2.5
C2A	20220829	Cloudy	Moderate	Mid-Ebb	Bottom	11.2	11:53	8.88	8.02	31.53	29.22	6.53	4
C2A	20220829	Cloudy	Moderate	Mid-Ebb	Bottom	11.2	11:53	8.75	8	31.64	29.21	6.57	7
CR1	20220829	Cloudy	Moderate	Mid-Ebb	Surface	1	13:26	8.25	8.21	32.67	29.5	6.2	2.5
CR1	20220829	Cloudy	Moderate	Mid-Ebb	Surface	1	13:26	8.35	8.19	32.44	29.45	5.55	3
CR1	20220829	Cloudy	Moderate	Mid-Ebb	Middle	6.85	13:25	8.33	8.18	32.62	29.5	5.61	6
CR1	20220829	Cloudy	Moderate	Mid-Ebb	Middle	6.85	13:25	8.26	8.2	32.6	29.41	6.21	5
CR1	20220829	Cloudy	Moderate	Mid-Ebb	Bottom	12.7	13:24	8.37	8.16	32.59	29.43	6.4	5
CR1	20220829	Cloudy	Moderate	Mid-Ebb	Bottom	12.7	13:24	8.37	8.21	32.58	29.43	6.77	5
CR2	20220829	Cloudy	Moderate	Mid-Ebb	Surface	1	13:12	9.22	8.05	32.03	29.3	5.52	2.5
CR2	20220829	Cloudy	Moderate	Mid-Ebb	Surface	1	13:12	9.28	8.03	32.05	29.3	5.38	2.5
CR2	20220829	Cloudy	Moderate	Mid-Ebb	Middle	6.05	13:11	9.23	8.04	32.16	29.37	5.87	5
CR2	20220829	Cloudy	Moderate	Mid-Ebb	Middle	6.05	13:11	9.27	8.1	32.33	29.37	5.67	5
CR2	20220829	Cloudy	Moderate	Mid-Ebb	Bottom	11.1	13:10	9.32	8.04	32.04	29.34	6.2	6
CR2	20220829	Cloudy	Moderate	Mid-Ebb	Bottom	11.1	13:10	9.29	8.06	32.29	29.4	5.96	5
F1A	20220829	Cloudy	Moderate	Mid-Ebb	Surface	1	12:44	8.84	8.14	31.61	29.26	5.77	4
F1A	20220829	Cloudy	Moderate	Mid-Ebb	Surface	1	12:44	8.95	8.05	31.77	29.28	5.42	4
F1A	20220829	Cloudy	Moderate	Mid-Ebb	Middle	4	12:43	8.82	8.06	31.87	29.31	5.53	3

Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
F1A	20220829	Cloudy	Moderate	Mid-Ebb	Middle	4	12:43	8.89	8.05	31.75	29.25	5.94	2.5
F1A	20220829	Cloudy	Moderate	Mid-Ebb	Bottom	7	12:42	8.8	8.1	31.83	29.27	6.1	4
F1A	20220829	Cloudy	Moderate	Mid-Ebb	Bottom	7	12:42	8.85	8.09	31.9	29.31	5.64	3
H1	20220829	Cloudy	Moderate	Mid-Ebb	Surface	1	12:58	9.29	7.98	31.94	29.56	5.01	3
H1	20220829	Cloudy	Moderate	Mid-Ebb	Surface	1	12:58	9.26	8.02	31.93	29.63	4.75	2.5
H1	20220829	Cloudy	Moderate	Mid-Ebb	Middle	4.45	12:57	9.29	7.94	32.11	29.53	5.57	3
H1	20220829	Cloudy	Moderate	Mid-Ebb	Middle	4.45	12:57	9.32	7.95	31.9	29.6	5.84	6
H1	20220829	Cloudy	Moderate	Mid-Ebb	Bottom	7.9	12:56	9.41	7.94	32.23	29.51	6.08	4
H1	20220829	Cloudy	Moderate	Mid-Ebb	Bottom	7.9	12:56	9.42	8.03	31.85	29.5	5.69	3
M1	20220829	Cloudy	Moderate	Mid-Ebb	Surface	1	13:09	9.03	8.09	32.29	29.49	5.27	4
M1	20220829	Cloudy	Moderate	Mid-Ebb	Surface	1	13:09	8.96	8.09	32.47	29.59	5.38	5
M1	20220829	Cloudy	Moderate	Mid-Ebb	Middle	4.8	13:08	8.94	8.07	32.55	29.56	5.31	2.5
M1	20220829	Cloudy	Moderate	Mid-Ebb	Middle	4.8	13:08	9.08	8.09	32.48	29.48	5.61	2.5
M1	20220829	Cloudy	Moderate	Mid-Ebb	Bottom	8.6	13:07	9.07	8.13	32.17	29.51	5.91	3
M1	20220829	Cloudy	Moderate	Mid-Ebb	Bottom	8.6	13:07	8.93	8.13	32.42	29.57	5.86	2.5
B1	20220831	Sunny	Moderate	Mid-Flood	Surface	1	09:25	9.32	8.16	31.07	29.4	3.56	6
B1	20220831	Sunny	Moderate	Mid-Flood	Surface	1	09:25	9.25	8.17	31.22	29.4	3.85	3
B1	20220831	Sunny	Moderate	Mid-Flood	Bottom	3.9	09:24	9.14	8.17	31.14	29.37	4.22	4
B1	20220831	Sunny	Moderate	Mid-Flood	Bottom	3.9	09:24	9.31	8.22	30.91	29.53	3.9	5
B2	20220831	Sunny	Moderate	Mid-Flood	Surface	1	09:44	8.41	8.09	32.22	29.19	3.83	3
B2	20220831	Sunny	Moderate	Mid-Flood	Surface	1	09:44	8.37	8.05	32.28	29.11	3.8	6
B2	20220831	Sunny	Moderate	Mid-Flood	Bottom	3.4	09:43	8.36	8.07	32.07	29.2	4.07	6
B2	20220831	Sunny	Moderate	Mid-Flood	Bottom	3.4	09:43	8.43	8.11	32.19	29.09	4.24	5
В3	20220831	Sunny	Moderate	Mid-Flood	Surface	1	10:22	9.17	8.23	31.12	29	5.85	3
В3	20220831	Sunny	Moderate	Mid-Flood	Surface	1	10:22	9.13	8.23	31.21	28.91	5.38	5
В3	20220831	Sunny	Moderate	Mid-Flood	Bottom	3.4	10:21	9.32	8.22	31.22	29.04	6.34	2.5
В3	20220831	Sunny	Moderate	Mid-Flood	Bottom	3.4	10:21	9.05	8.21	31.09	29.04	6.04	3
B4	20220831	Sunny	Moderate	Mid-Flood	Surface	1	10:09	8.75	8.08	32.16	29.47	5.63	4
B4	20220831	Sunny	Moderate	Mid-Flood	Surface	1	10:09	8.82	8.08	32.08	29.28	5.44	2.5
B4	20220831	Sunny	Moderate	Mid-Flood	Bottom	3.6	10:08	8.83	8.08	31.99	29.34	6.7	4
B4	20220831	Sunny	Moderate	Mid-Flood	Bottom	3.6	10:08	8.67	8.06	31.98	29.3	6.23	6
C1A	20220831	Sunny	Moderate	Mid-Flood	Surface	1	08:57	9.14	8.11	31.86	29.31	5.06	6
C1A	20220831	Sunny	Moderate	Mid-Flood	Surface	1	08:57	9.31	8.06	31.66	29.15	5.28	6
C1A	20220831	Sunny	Moderate	Mid-Flood	Middle	5.55	08:56	8.89	8.1	31.48	29.33	5.85	8
C1A	20220831	Sunny	Moderate	Mid-Flood	Middle	5.55	08:56	8.76	8.08	31.9	29.33	5.65	7
C1A	20220831	Sunny	Moderate	Mid-Flood	Bottom	10.1	08:55	9.07	8.08	31.69	29.24	6.07	5
C1A	20220831	Sunny	Moderate	Mid-Flood	Bottom	10.1	08:55	8.94	8.11	31.61	29.13	5.92	5
C2A	20220831	Sunny	Moderate	Mid-Flood	Surface	1	08:02	8.39	8.09	32.13	29.17	6.94	2.5
C2A	20220831	Sunny	Moderate	Mid-Flood	Surface	1	08:02	8.47	8.07	32.2	29.26	6.88	2.5
C2A	20220831	Sunny	Moderate	Mid-Flood	Middle	5.5	08:01	8.42	8.05	32.15	29.09	7.13	6
C2A	20220831	Sunny	Moderate	Mid-Flood	Middle	5.5	08:01	8.38	8.12	32.17	29.16	7.3	8


Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
C2A	20220831	Sunny	Moderate	Mid-Flood	Bottom	10	08:00	8.46	8.1	32.13	29.06	7.82	4
C2A	20220831	Sunny	Moderate	Mid-Flood	Bottom	10	08:00	8.45	8.12	32.18	29.23	7.49	3
CR1	20220831	Sunny	Moderate	Mid-Flood	Surface	1	08:25	8.89	8.23	31.14	29.39	5.22	8
CR1	20220831	Sunny	Moderate	Mid-Flood	Surface	1	08:25	8.85	8.23	31.19	29.46	5.39	7
CR1	20220831	Sunny	Moderate	Mid-Flood	Middle	6	08:24	8.94	8.24	30.85	29.48	5.67	8
CR1	20220831	Sunny	Moderate	Mid-Flood	Middle	6	08:24	8.89	8.24	31.11	29.46	5.2	6
CR1	20220831	Sunny	Moderate	Mid-Flood	Bottom	11	08:23	8.98	8.24	30.92	29.39	5.5	5
CR1	20220831	Sunny	Moderate	Mid-Flood	Bottom	11	08:23	9	8.25	31.13	29.42	5.39	6
CR2	20220831	Sunny	Moderate	Mid-Flood	Surface	1	08:40	8.63	8.12	32.33	29.36	5.27	9
CR2	20220831	Sunny	Moderate	Mid-Flood	Surface	1	08:40	8.62	8.11	32.11	29.35	6.12	10
CR2	20220831	Sunny	Moderate	Mid-Flood	Middle	5.45	08:39	8.66	8.19	32.22	29.46	5.84	7
CR2	20220831	Sunny	Moderate	Mid-Flood	Middle	5.45	08:39	8.6	8.11	32.19	29.38	6.01	5
CR2	20220831	Sunny	Moderate	Mid-Flood	Bottom	9.9	08:38	8.66	8.11	32.14	29.51	6.37	2.5
CR2	20220831	Sunny	Moderate	Mid-Flood	Bottom	9.9	08:38	8.64	8.18	32.32	29.41	6.26	2.5
F1A	20220831	Sunny	Moderate	Mid-Flood	Surface	1	09:43	8.39	8.22	31.16	29.17	5.78	3
F1A	20220831	Sunny	Moderate	Mid-Flood	Surface	1	09:43	8.42	8.21	31.4	29.13	6.08	6
F1A	20220831	Sunny	Moderate	Mid-Flood	Middle	3.9	09:42	8.36	8.2	31.11	29.33	5.24	6
F1A	20220831	Sunny	Moderate	Mid-Flood	Middle	3.9	09:42	8.38	8.21	31.5	29.2	6.07	7
F1A	20220831	Sunny	Moderate	Mid-Flood	Bottom	6.8	09:41	8.44	8.17	31.23	29.2	5.78	6
F1A	20220831	Sunny	Moderate	Mid-Flood	Bottom	6.8	09:41	8.49	8.23	31.18	29.23	6.02	4
H1	20220831	Sunny	Moderate	Mid-Flood	Surface	1	10:10	9.22	8.18	32.28	29.12	6.61	6
H1	20220831	Sunny	Moderate	Mid-Flood	Surface	1	10:10	9.3	8.15	32.19	29.17	6.45	4
H1	20220831	Sunny	Moderate	Mid-Flood	Middle	3.75	10:09	9.12	8.16	32.09	29.21	5.69	5
H1	20220831	Sunny	Moderate	Mid-Flood	Middle	3.75	10:09	9.15	8.11	32.29	29.2	5.86	5
H1	20220831	Sunny	Moderate	Mid-Flood	Bottom	6.5	10:08	9.14	8.14	32.18	29.26	6	6
H1	20220831	Sunny	Moderate	Mid-Flood	Bottom	6.5	10:08	9.28	8.14	32.02	29.18	6.18	5
M1	20220831	Sunny	Moderate	Mid-Flood	Surface	1	09:20	8.74	8.17	31.75	29.25	4.72	3
M1	20220831	Sunny	Moderate	Mid-Flood	Surface	1	09:20	8.68	8.15	31.82	29.32	4.92	6
M1	20220831	Sunny	Moderate	Mid-Flood	Middle	4.15	09:19	8.72	8.12	32.14	29.24	5.24	6
M1	20220831	Sunny	Moderate	Mid-Flood	Middle	4.15	09:19	8.74	8.15	31.72	29.32	4.96	4
M1	20220831	Sunny	Moderate	Mid-Flood	Bottom	7.3	09:18	8.69	8.1	31.7	29.23	5.44	4
M1	20220831	Sunny	Moderate	Mid-Flood	Bottom	7.3	09:18	8.67	8.17	32.12	29.25	5.31	2.5
B1	20220831	Sunny	Moderate	Mid-Ebb	Surface	1	13:25	8.47	8.29	31.97	29.41	3.22	2.5
B1	20220831	Sunny	Moderate	Mid-Ebb	Surface	1	13:25	8.46	8.26	31.94	29.4	3.46	2.5
B1	20220831	Sunny	Moderate	Mid-Ebb	Bottom	4.1	13:24	8.56	8.25	32.19	29.42	3.82	3
B1	20220831	Sunny	Moderate	Mid-Ebb	Bottom	4.1	13:24	8.6	8.28	32.06	29.43	3.73	4
B2	20220831	Sunny	Moderate	Mid-Ebb	Surface	1	13:40	8.44	8.3	31.27	29.6	3.42	2.5
B2	20220831	Sunny	Moderate	Mid-Ebb	Surface	1	13:40	8.49	8.3	31.43	29.53	3.57	2.5
B2	20220831	Sunny	Moderate	Mid-Ebb	Bottom	4.6	13:39	8.42	8.26	31.28	29.65	3.99	3
B2	20220831	Sunny	Moderate	Mid-Ebb	Bottom	4.6	13:39	8.51	8.27	31.42	29.66	3.66	2.5
В3	20220831	Sunny	Moderate	Mid-Ebb	Surface	1	13:15	8.53	8.16	31.29	29.37	4.87	2.5


Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
B3	20220831	Sunny	Moderate	Mid-Ebb	Surface	1	13:15	8.42	8.21	31.32	29.43	4.61	2.5
B3	20220831	Sunny	Moderate	Mid-Ebb	Bottom	3.9	13:14	8.46	8.16	31.39	29.29	5.94	3
B3	20220831	Sunny	Moderate	Mid-Ebb	Bottom	3.9	13:14	8.44	8.13	31.4	29.32	5.62	5
B4	20220831	Sunny	Moderate	Mid-Ebb	Surface	1	13:25	8.61	8.27	32.19	29.55	5.6	5
B4	20220831	Sunny	Moderate	Mid-Ebb	Surface	1	13:25	8.52	8.28	32.04	29.49	5.25	5
B4	20220831	Sunny	Moderate	Mid-Ebb	Bottom	3.5	13:24	8.62	8.29	32.23	29.49	5.89	5
B4	20220831	Sunny	Moderate	Mid-Ebb	Bottom	3.5	13:24	8.63	8.28	32.09	29.58	5.29	5
C1A	20220831	Sunny	Moderate	Mid-Ebb	Surface	1	13:04	8.58	8.15	31.47	29.46	5.98	2.5
C1A	20220831	Sunny	Moderate	Mid-Ebb	Surface	1	13:04	8.59	8.16	31.48	29.54	6.23	2.5
C1A	20220831	Sunny	Moderate	Mid-Ebb	Middle	5.3	13:03	8.67	8.2	31.62	29.46	6.48	2.5
C1A	20220831	Sunny	Moderate	Mid-Ebb	Middle	5.3	13:03	8.62	8.22	31.36	29.53	6.26	2.5
C1A	20220831	Sunny	Moderate	Mid-Ebb	Bottom	9.6	13:02	8.61	8.23	31.33	29.48	6.72	3
C1A	20220831	Sunny	Moderate	Mid-Ebb	Bottom	9.6	13:02	8.61	8.2	31.54	29.47	6.88	2.5
C2A	20220831	Sunny	Moderate	Mid-Ebb	Surface	1	13:04	8.17	8.23	32.11	29.56	5.12	3
C2A	20220831	Sunny	Moderate	Mid-Ebb	Surface	1	13:04	8.19	8.21	32.14	29.66	5.15	2.5
C2A	20220831	Sunny	Moderate	Mid-Ebb	Middle	6.05	13:03	8.13	8.29	32.48	29.66	5.66	2.5
C2A	20220831	Sunny	Moderate	Mid-Ebb	Middle	6.05	13:03	8.15	8.21	32.24	29.51	5.89	2.5
C2A	20220831	Sunny	Moderate	Mid-Ebb	Bottom	11.1	13:02	8.2	8.18	32.27	29.5	6.08	2.5
C2A	20220831	Sunny	Moderate	Mid-Ebb	Bottom	11.1	13:02	8.22	8.28	32.3	29.5	5.81	2.5
CR1	20220831	Sunny	Moderate	Mid-Ebb	Surface	1	14:31	8.15	8.3	31.8	29.36	4.54	2.5
CR1	20220831	Sunny	Moderate	Mid-Ebb	Surface	1	14:31	8.16	8.3	32.21	29.39	4.36	2.5
CR1	20220831	Sunny	Moderate	Mid-Ebb	Middle	6.3	14:30	8.26	8.3	31.96	29.53	4.28	2.5
CR1	20220831	Sunny	Moderate	Mid-Ebb	Middle	6.3	14:30	8.25	8.29	32.14	29.4	4.36	2.5
CR1	20220831	Sunny	Moderate	Mid-Ebb	Bottom	11.6	14:29	8.17	8.3	32.21	29.37	4.78	2.5
CR1	20220831	Sunny	Moderate	Mid-Ebb	Bottom	11.6	14:29	8.23	8.28	32.23	29.49	4.53	2.5
CR2	20220831	Sunny	Moderate	Mid-Ebb	Surface	1	14:17	8.94	8.3	32.21	29.26	4.25	2.5
CR2	20220831	Sunny	Moderate	Mid-Ebb	Surface	1	14:17	8.99	8.29	31.99	29.3	4.12	2.5
CR2	20220831	Sunny	Moderate	Mid-Ebb	Middle	5.7	14:16	8.94	8.3	31.98	29.39	4.59	2.5
CR2	20220831	Sunny	Moderate	Mid-Ebb	Middle	5.7	14:16	8.86	8.27	31.98	29.33	4.35	2.5
CR2	20220831	Sunny	Moderate	Mid-Ebb	Bottom	10.4	14:15	8.92	8.27	32.25	29.39	5.51	2.5
CR2	20220831	Sunny	Moderate	Mid-Ebb	Bottom	10.4	14:15	8.87	8.3	32.21	29.25	5.81	2.5
F1A	20220831	Sunny	Moderate	Mid-Ebb	Surface	1	13:51	8.74	8.28	32.14	29.3	4.51	2.5
F1A	20220831	Sunny	Moderate	Mid-Ebb	Surface	1	13:51	8.84	8.29	31.94	29.2	4.62	2.5
F1A	20220831	Sunny	Moderate	Mid-Ebb	Middle	4.4	13:50	8.79	8.25	31.9	29.29	5.14	3
F1A	20220831	Sunny	Moderate	Mid-Ebb	Middle	4.4	13:50	8.69	8.3	32.23	29.18	4.81	2.5
F1A	20220831	Sunny	Moderate	Mid-Ebb	Bottom	7.8	13:49	8.85	8.29	32.3	29.16	5.65	2.5
F1A	20220831	Sunny	Moderate	Mid-Ebb	Bottom	7.8	13:49	8.71	8.27	32.17	29.18	5.38	4
H1	20220831	Sunny	Moderate	Mid-Ebb	Surface	1	14:05	8.49	8.26	32.15	29.62	4.15	5
H1	20220831	Sunny	Moderate	Mid-Ebb	Surface	1	14:05	8.6	8.29	32.11	29.54	4.14	5
H1	20220831	Sunny	Moderate	Mid-Ebb	Middle	3.9	14:04	8.52	8.3	32.42	29.48	4.45	5
H1	20220831	Sunny	Moderate	Mid-Ebb	Middle	3.9	14:04	8.53	8.26	32.19	29.65	4.33	6


Location	Date (YYYYMMDD)	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	рН	Sal (ppt)	Temp (°C)	Turbidty (NTU) Note 1	SS (mg/L)
H1	20220831	Sunny	Moderate	Mid-Ebb	Bottom	6.8	14:03	8.57	8.28	32.38	29.5	4.7	4
H1	20220831	Sunny	Moderate	Mid-Ebb	Bottom	6.8	14:03	8.61	8.3	32.41	29.52	4.84	2.5
M1	20220831	Sunny	Moderate	Mid-Ebb	Surface	1	14:13	8.84	8.22	31.31	29.29	4.13	2.5
M1	20220831	Sunny	Moderate	Mid-Ebb	Surface	1	14:13	8.87	8.21	31.27	29.33	4.31	2.5
M1	20220831	Sunny	Moderate	Mid-Ebb	Middle	4.35	14:12	8.91	8.16	31.5	29.3	4.94	2.5
M1	20220831	Sunny	Moderate	Mid-Ebb	Middle	4.35	14:12	8.75	8.25	31.33	29.27	4.51	2.5
M1	20220831	Sunny	Moderate	Mid-Ebb	Bottom	7.7	14:11	8.82	8.19	31.57	29.29	5.36	2.5
M1	20220831	Sunny	Moderate	Mid-Ebb	Bottom	7.7	14:11	8.87	8.17	31.48	29.32	5.09	2.5


Remark:


Note 1: Measurements of turbidity would be rounding to 0.1 NTU for proven accuracy as per the equipment specs during utilization of data.

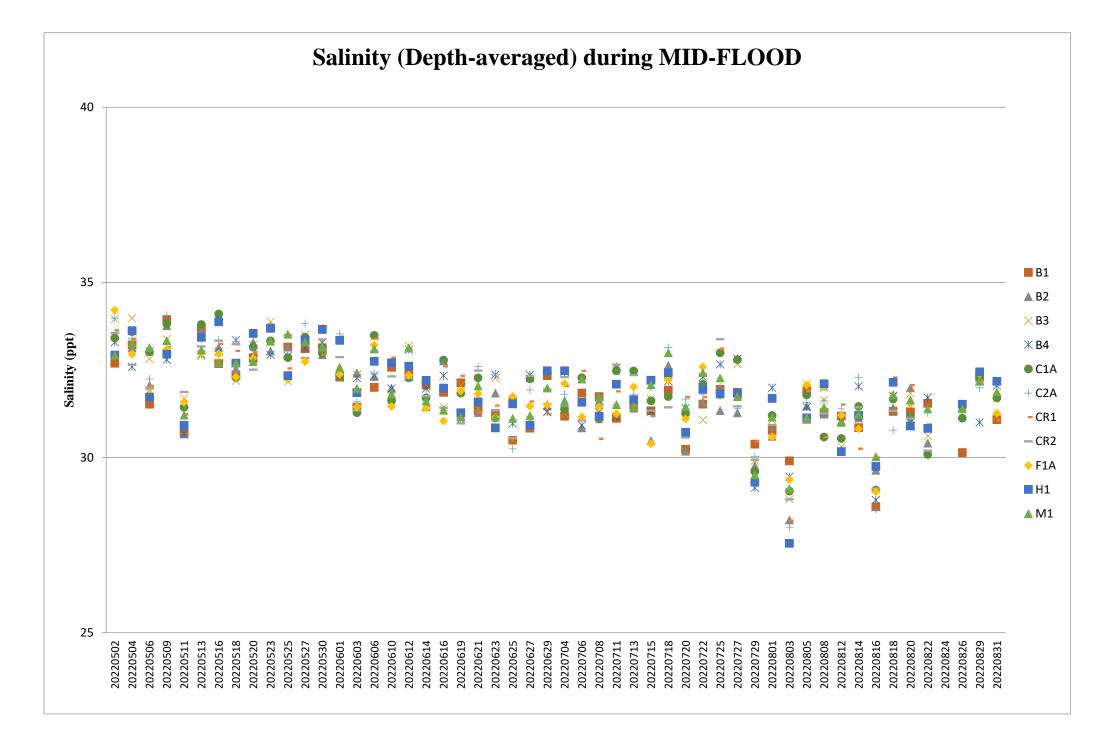


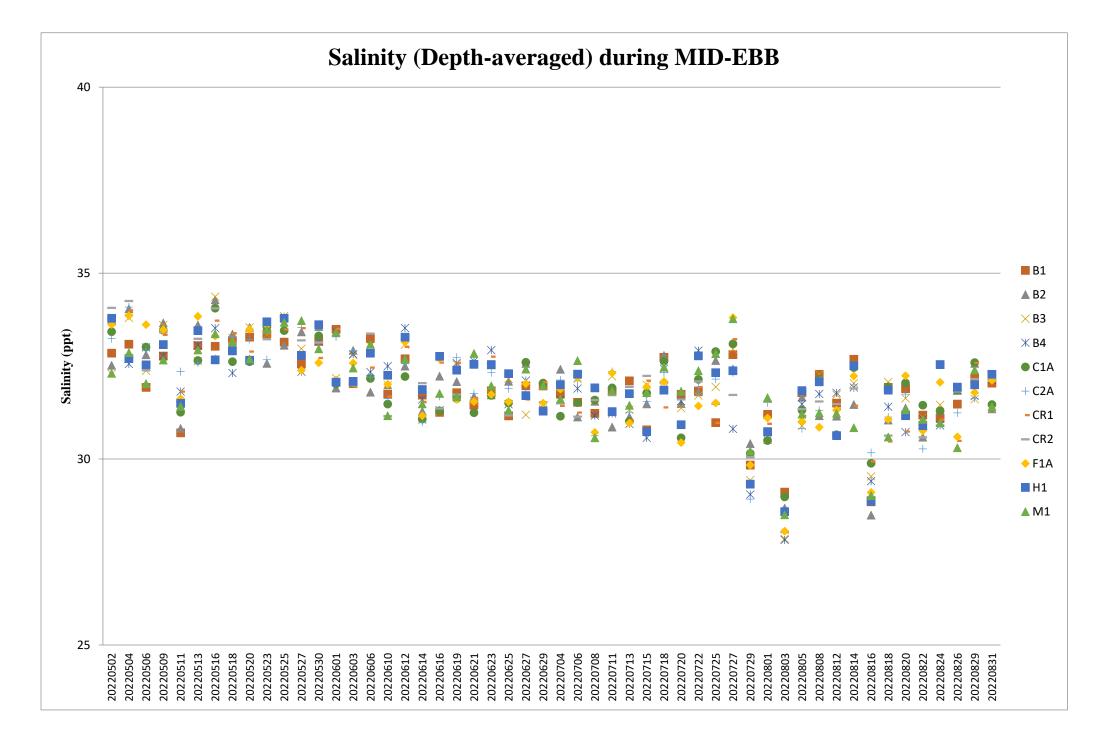


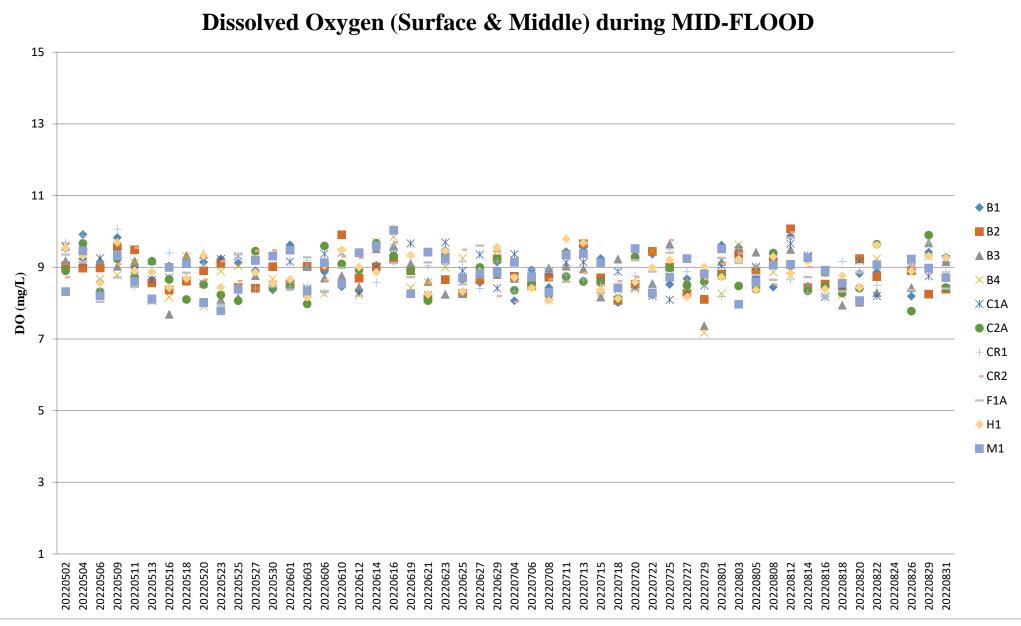


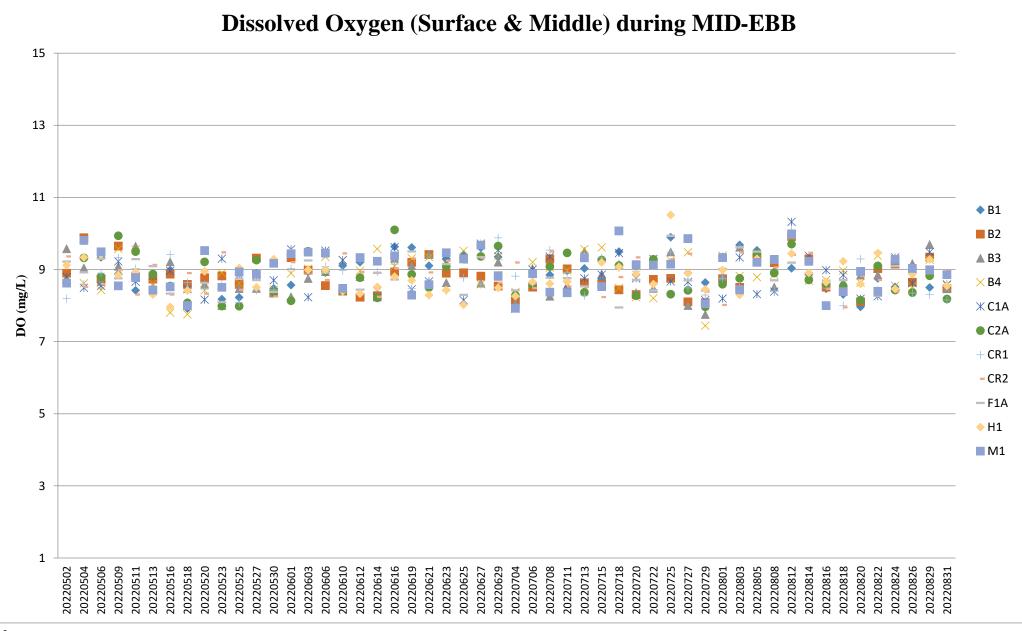


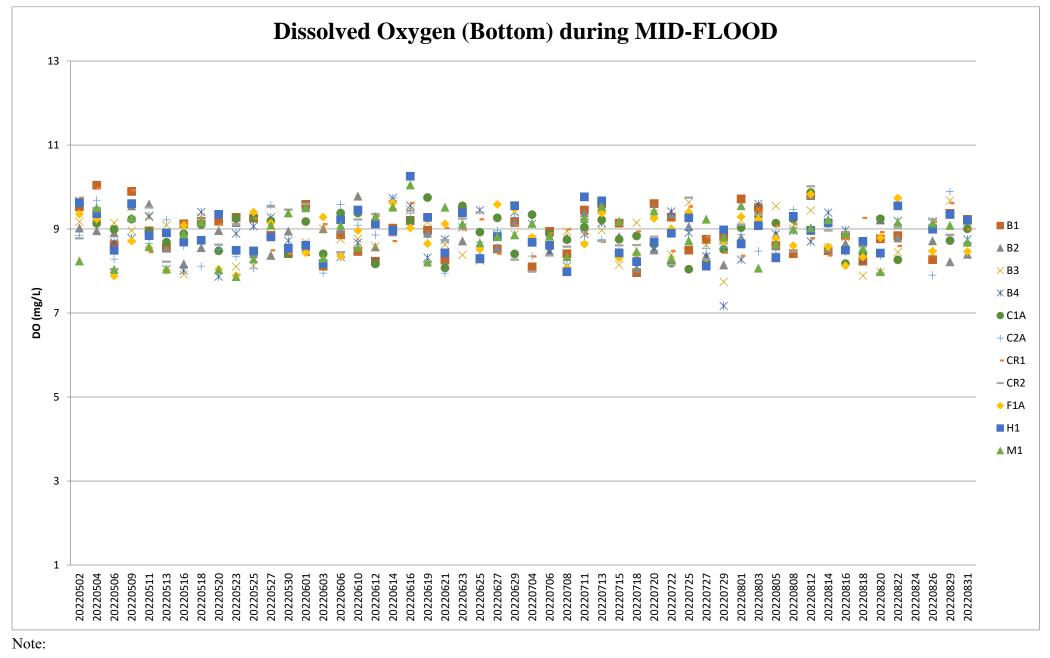

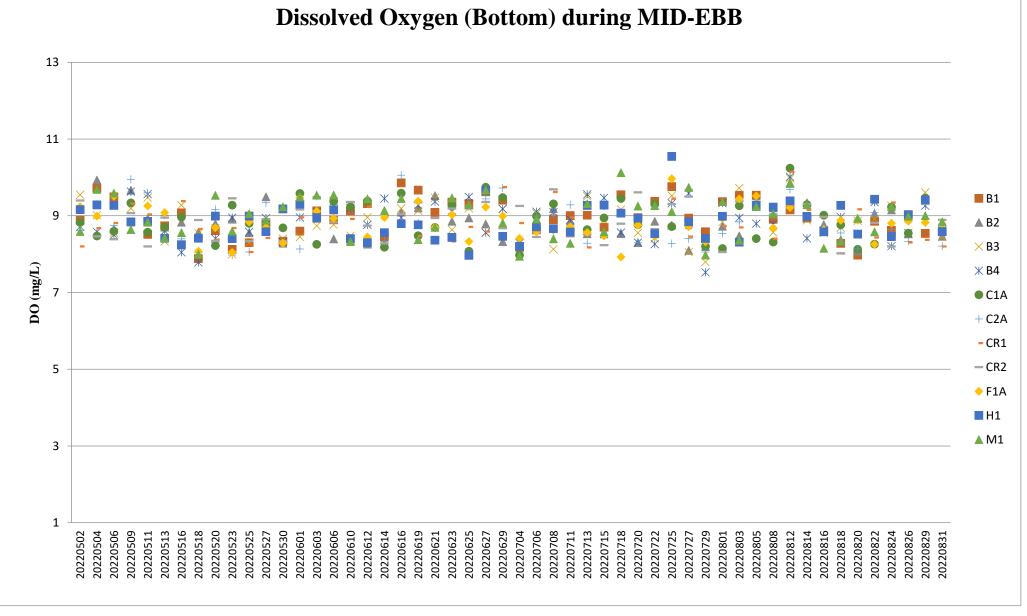

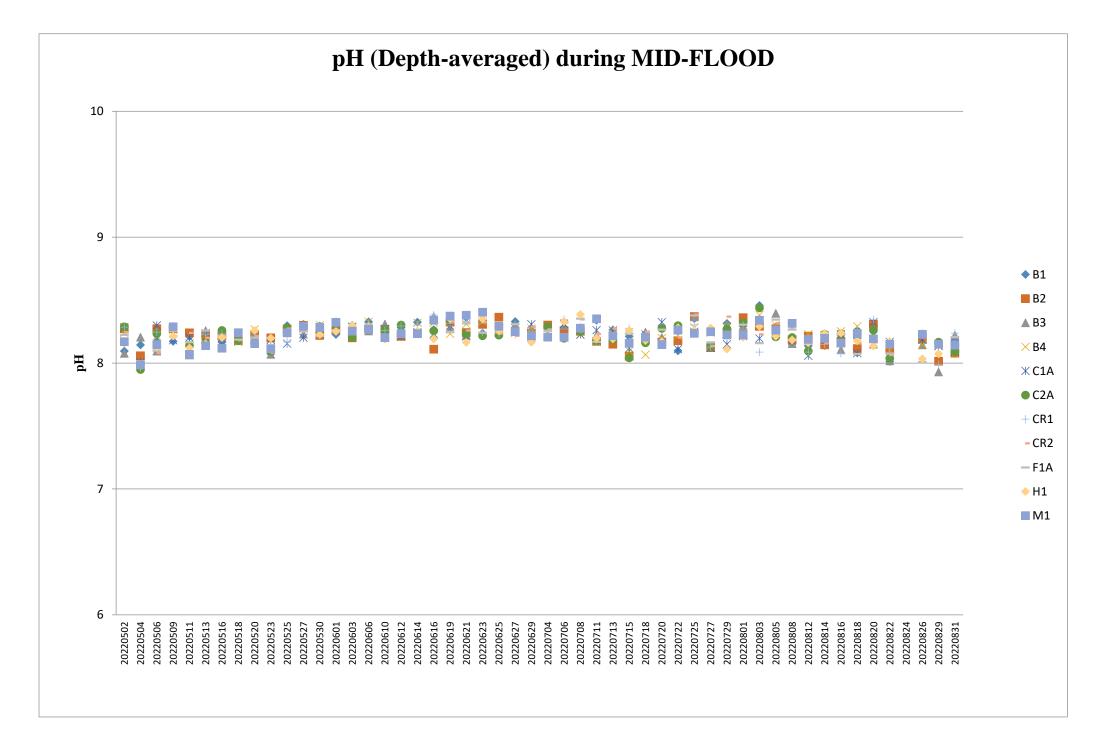


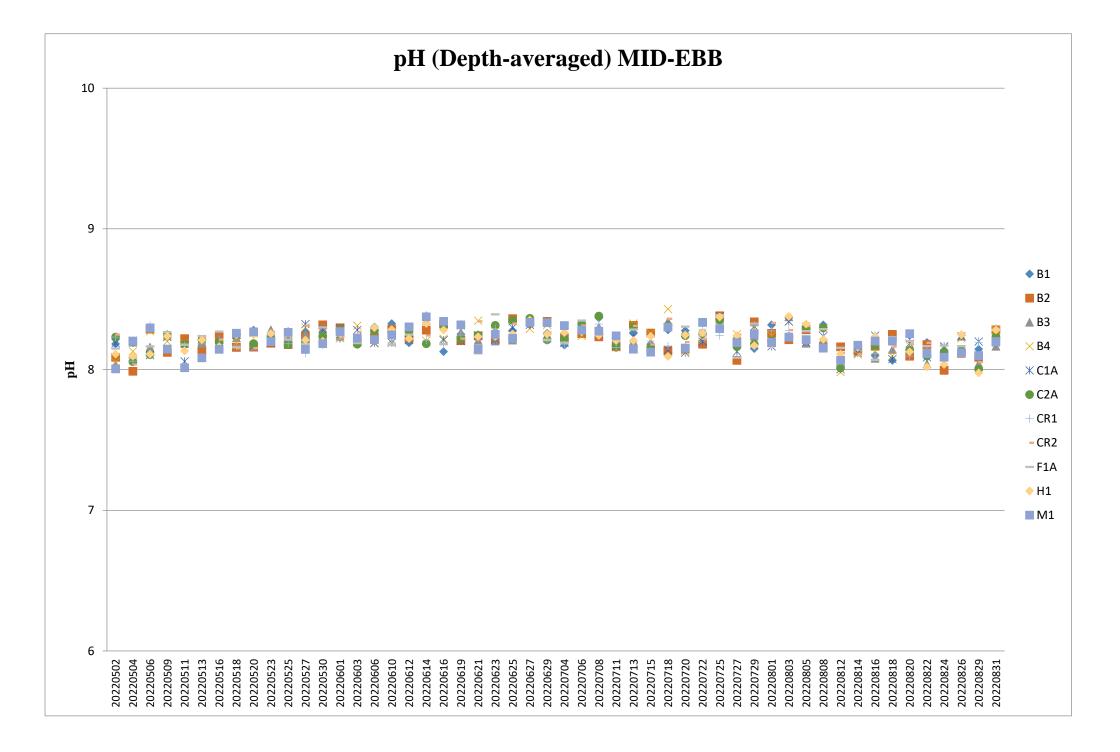

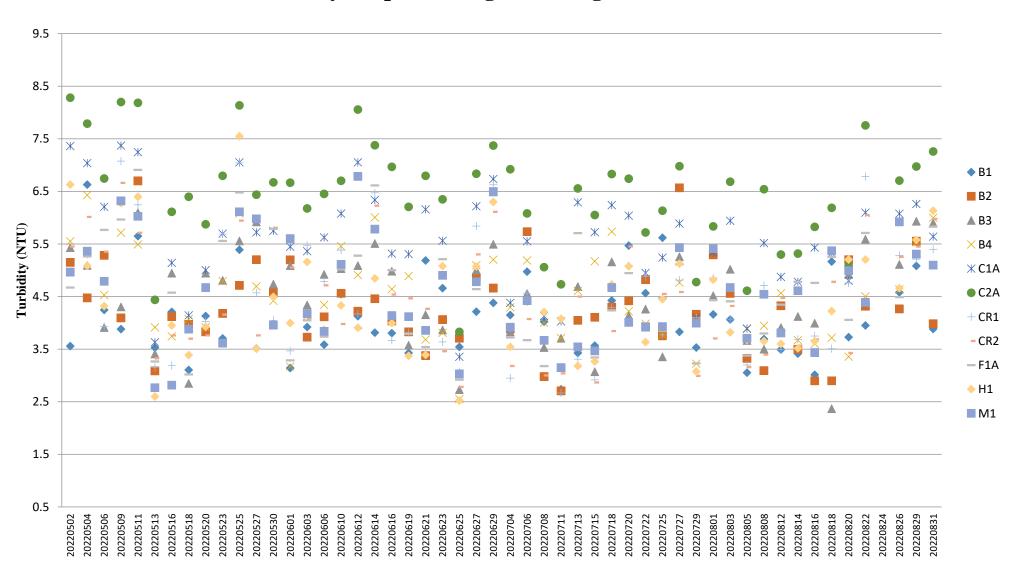


# **Turbidity (Depth-averaged) during MID-FLOOD**


Note:

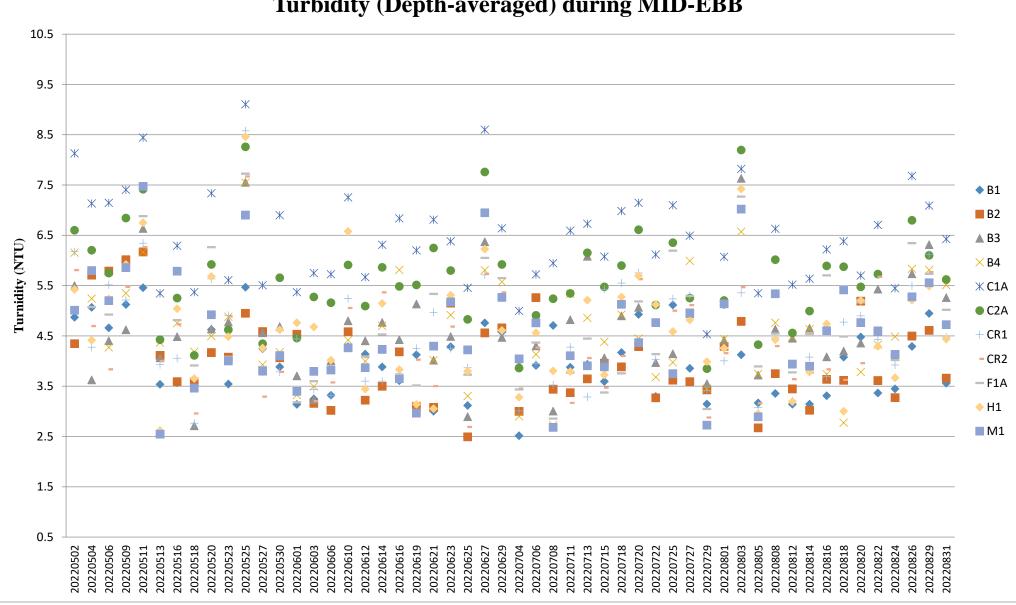

# **Turbidity (Depth-averaged) during MID-EBB**

Note:

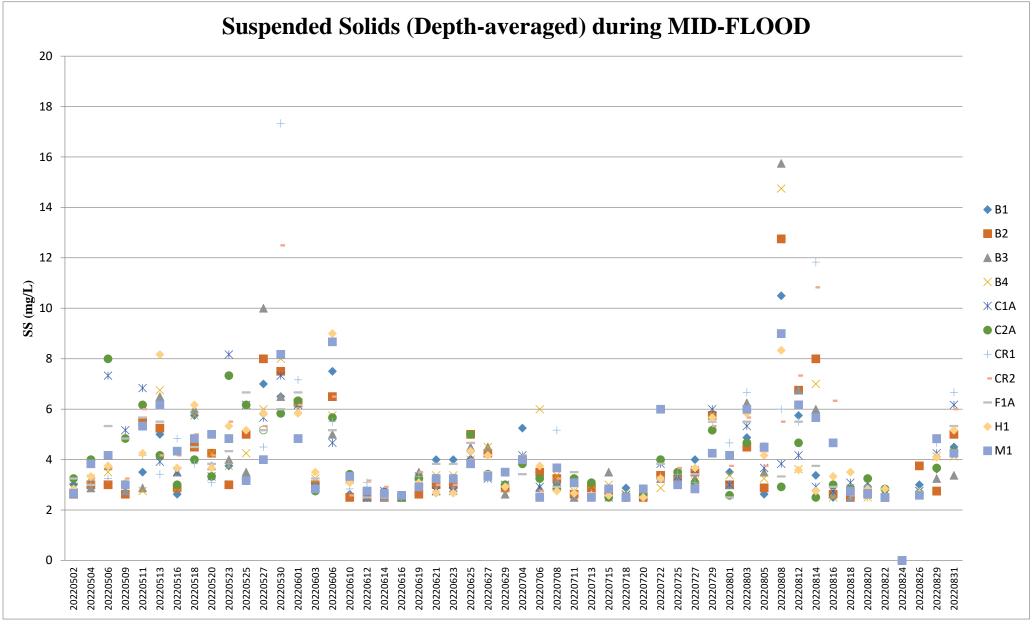


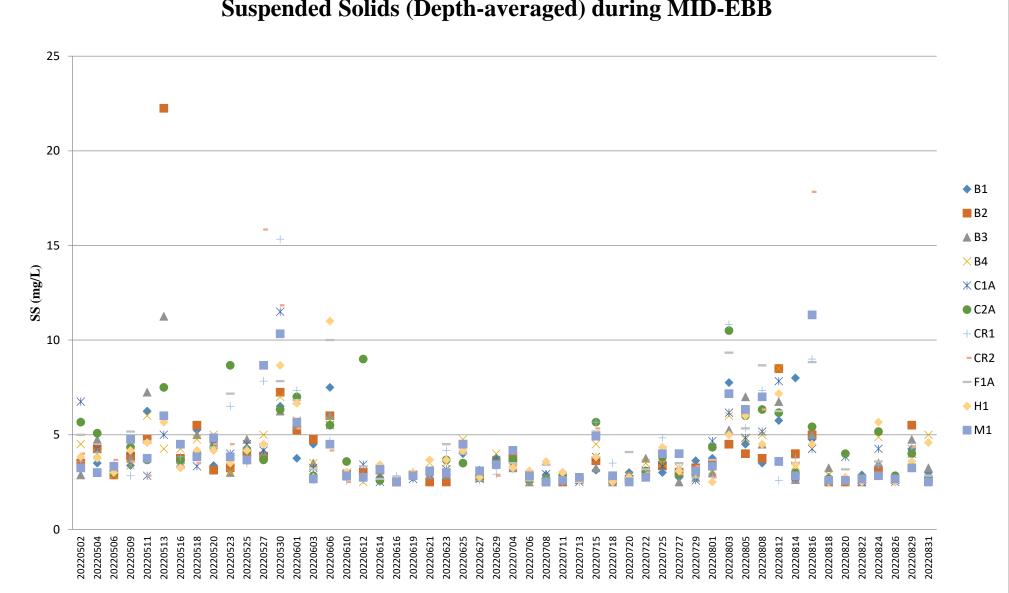


# Suspended Solids (Depth-averaged) during MID-EBB

Note:

1. The Action and Limit Level of suspended solids can be referred to Table 2.8 of the monthly EM&A report

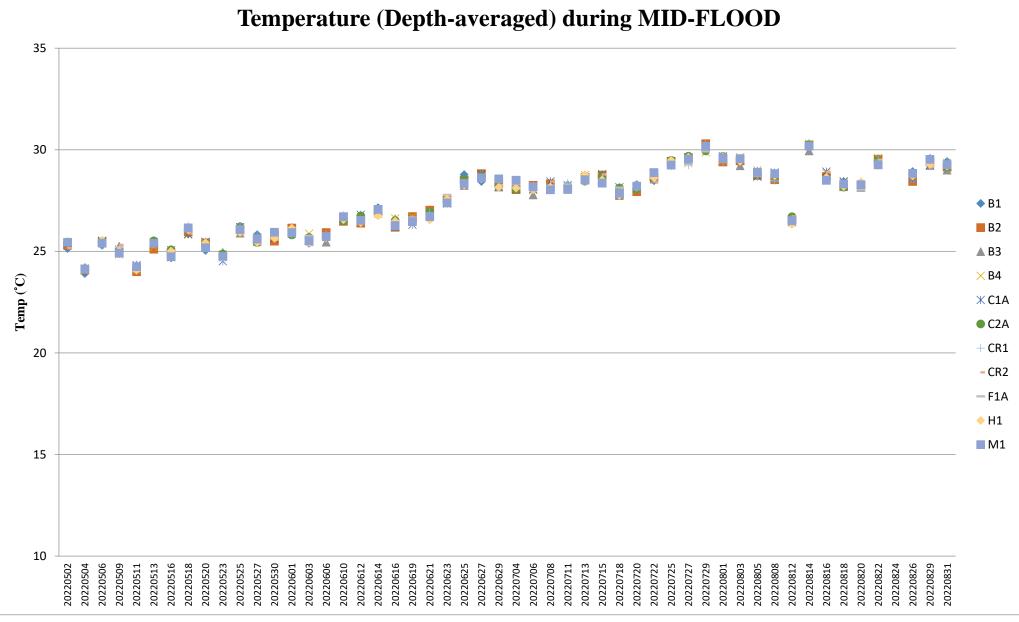

1. The Action and Limit Level of temperature can be referred to Table 2.8 of the monthly EM&A report.

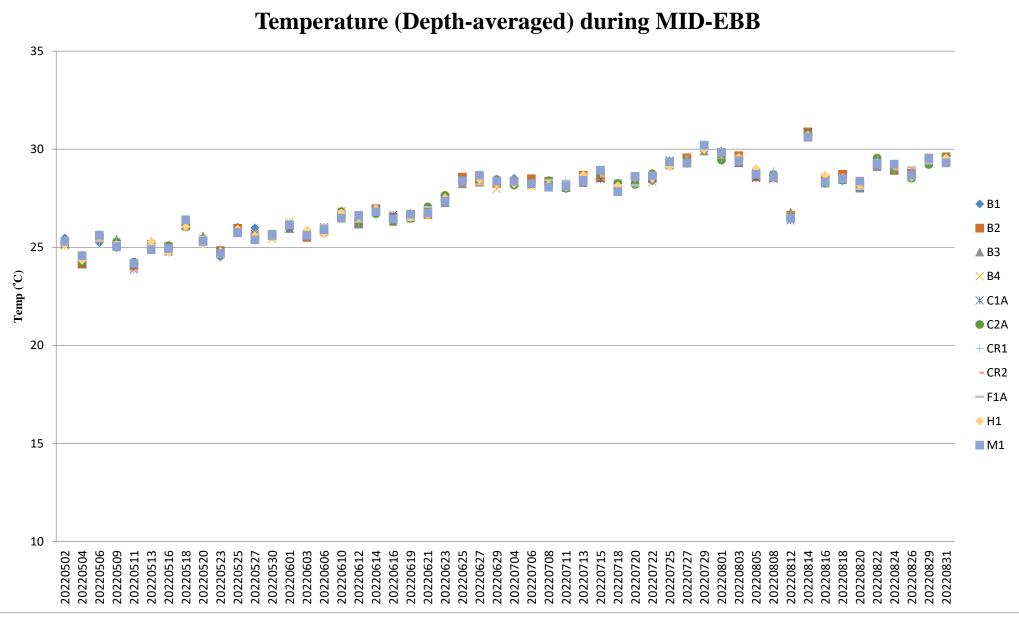

1. The Action and Limit Level of temperature can be referred to Table 2.8 of the monthly EM&A report.

# Appendix E HOKLAS Laboratory Certificate

Integrated Waste Management Facilities, Phase 1



Hong Kong Accreditation Service 香港認可處

## Certificate of Accreditation 認可證書

This is to certify that 特此證明

### ALS TECHNICHEM (HK) PTY LIMITED

11/F., Chung Shun Knitting Centre, 1-3 Wing Yip Street, Kwai Chung, New Territories, Hong Kong 香港新界葵涌永業街1-3號忠信針織中心11樓

has been accepted by the HKAS Executive, on the recommendation of the Accreditation Advisory Board, as a 為香港認可處執行機關根據認可證詞委員會建議而接受的

#### HOKLAS Accredited Laboratory 「香港實驗所認可計劃」認可實驗所

This laboratory meets the requirements of ISO / IEC 17025 : 2005 – General requirements for the competence 此實驗所符合ISO / IEC 17025 : 2005 – 《測試及校正實驗所能力的通用規定》所訂的要求。 of testing and calibration laboratories and it has been accredited for performing specific tests or calibrations as 獲認可進行載於香港實驗所認可計劃《認可實驗所名冊》內下這測試類別中的指定 listed in the HOKLAS Directory of Accredited Laboratories within the test category of 測試或校正工作

> Environmental Testing 環境測試

This laboratory is accredited in accordance with the recognized international Standard ISO / IEC 17025 : 2005. 本實驗所乃相違公認的國際標準 ISO / IEC 17025 : 2005 獲得證可。 This accreditation demonstrates technical compatence for a defined scope and the operation of a laboratory 道項證可資格源示在指定範疇所需的技術能力及實驗所質量管理關系的運作 quality management system (see joint IAF-ILAC-ISO Computingue). (見國際認可論權、國際實驗所認可合作證職及國際標準化組織的融合公報)。

The common seal of the Hong Kong Accreditation Service is affixed hereto by the authority of the HKAS Executive 香港認可處執行機關的權限在此蓋上通用印章

CHAN Sing Sing, Terence, Executive Administrator 執行幹事 陳成城 Issue Date: 5 May 2009 簽發日期:二零零九年五月五日

Registration Number: HOKLAS 066 註冊號碼:



Date of First Registration: 15 September 1995 首次註冊日期:一九九五年九月十五日

This certilicate is issued sobject to the torms and conditions laid down by HKAS 本證書按照香港銀可處訂立的條款及條件發出 L 000552

Contract No. EP/SP/66/12

Integrated Waste Management Facilities, Phase 1

Keppel Seghers - Zhen Hua Joint Venture



Hong Kong Accreditation Service 香港認可處

## Certificate of Accreditation 認可證書

This is to certify that 特此證明

#### ACUMEN LABORATORY AND TESTING LIMITED

浩科檢測中心有限公司

Lot 12, Tam Kon Shan Road, North Tsing Yi, New Territories, Hong Kong 香港新界青衣北担杆山路12路段

has been accepted by the HKAS Executive, on the recommendation of the Accreditation Advisory Board, as a 在認可諮詢委員會的建議下獲香港認可處執行機關接受為

#### HOKLAS Accredited Laboratory

「香港實驗所認可計劃」認可實驗所

This laboratory meets the requirements of ISO/IEC 17025:2005 and it has been accredited for performing specific tests or calibrations as listed in the scope of accreditation within the test category of

**Environmental Testing** 

此實驗所符合ISO/IEC 17025:2005所訂的要求 並獲認可進行載於認可範圍內下述測試類別中的指定測試成校正工作

環境測試

This accreditation to ISO/IEC 17025:2005 demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (see joint IAF-ILAC-ISO Communiqué). 此項 ISO/IEC 17025:2005 的認可資格證明此實驗所與借指定範疇內所須的技術能力並 實施一套實驗所質量管理麵系(見圖際認可論握、圖際實驗所認可合作組織及圖際標準化組織的聯合公經)。

The common seal of the Hong Kong Accreditation Service is affixed hereto by the authority of the HKAS Executive 現經香港認可處執行機關授權在此蓋上香港認可處的印章

WONG Wang-wh, Executive Administrator 執行幹事 黃宏華 Issue Date: 16 July 2014 簽發日期:二零一四年七月十六日 Registration Number: 註冊號碼:

This certificate is issued subject to the terms and conditions laid down by HKAS. 本證書按照書港師可處訂立的條款及條件登出



Date of First Registration: 16 July 2014 首次註冊日期:二零一四年七月十六日

L 001195

# Appendix F Water Quality Equipment Calibration Certificate



專 業 化 驗 有 限 公 司 OUALITY PRO TEST-CONSULT LIMITED

Unit 10, 14/F, Wah Wai Centre, 38-40 Au Pui Wan St., Fotan, Hong Kong Email: info@qualityprotest.com; Website: www.qualityprotest.com Tel: (852) 3956 8717; Fax: (852) 3956 3928

# **REPORT OF EQUIPMENT PERFORMANCE CHECK/ CALIBRATION**

Test Report No. Date of Issue Page No. : R-BB080029 : 05 August 2022 : 1 of 2

#### **PART A - CUSTOMER INFORMATION**

Acuity Sustainability Consulting Limited Unit E, 12/F, Ford Glory Plaza 37-39 Wing Hong Street, Cheung Sha Wan Kowloon (HK) Hong Kong

#### **PART B - SAMPLE INFORMATION**

Name of Equipment :	HORIBA U-53
Manufacturer :	HORIBA
Serial Number :	PPHNOMXY
Date of Received :	02 August 2022
Date of Calibration :	04 August 2022
Date of Next Calibration :	03 November 2022
Request No. :	D-BB080029

#### PART C - REFERENCE METHODS/ DOCUMENTS FOR THE CALIBRATION

<u>Test Parameter</u>	Reference Method
pH value	APHA 21e 4500 H+
Temperature	Section 6 of international Accreditation New Zealand Technical Guide no. 3 Second edition March
	2008: Working Thermometer Calibration Procedure
Salinity	APHA 21e 2520B
Dissolved oxygen	APHA 21e 4500 O
Turbidity	APHA 21e 2130B

#### **PART D - CALIBRATION RESULT**

#### (1) pH value

Target ( pH unit )	Display Reading (pH unit)	Tolerance	Result
4.00	3.99	-0.01	Satisfactory
7.42	7.27	-0.15	Satisfactory
10.01	9.84	-0.17	Satisfactory

Tolerance of pH value should be less than  $\pm$  0.2 ( pH unit )

#### (2) Temperature

Reading of Ref. thermometer (°C)	Display Reading ( °C )	Tolerance	Result
18.0	18.3	0.3	Satisfactory
27.0	26.8	-0.2	Satisfactory
32.0	31.9	-0.1	Satisfactory

Tolerance of Temperature should be less than  $\pm$  2.0 (  $^{\circ}C$  )

#### (3) Salinity

Expected Reading (g/L)	Display Reading ( g/L )	Tolerance (%)	Result
10	10.60	6.00	Satisfactory
20	21.97	9.85	Satisfactory
30	32.96	9.87	Satisfactory

Tolerance of Salinity should be less than  $\pm$  10.0 ( % )

--- CONTINUED ON NEXT PAGE ---

AUTHORIZED SIGNATORY:

LEE Chun-nin

Assistant Manager (Chemical Testing)

This report shall not be reproduced unless with prior written approval from this laboratory



# **REPORT OF EQUIPMENT PERFORMANCE CHECK/ CALIBRATION**

Test Report No.	
Date of Issue	
Page No.	

: R-BB080029 : 05 August 2022 : 2 of 2

#### (4) Dissolved oxygen

Expected Reading ( mg/L )	Display Reading ( mg/L )	Tolerance	Result
7.76	7.69	-0.07	Satisfactory
5.19	5.06	-0.13	Satisfactory
2.88	2.49	-0.39	Satisfactory
0.07	0.21	0.14	Satisfactory

Tolerance of Dissolved oxygen should be less than  $\pm$  0.5 ( mg/L )

#### (5) Turbidity

Expected Reading (NTU)	Display Reading ( NTU )	Tolerance ( % )	Result
0	0.00		Satisfactory
10	9.87	-1.30	Satisfactory
20	19.9	-0.50	Satisfactory
100	101	1.00	Satisfactory
800	805	0.60	Satisfactory

Tolerance of Turbidity should be less than  $\pm$  10.0 (%)

#### Remark(s)

•The "Date of Next Calibration" is recommended according to best practice principals as practiced by QPT or quoted form relevant international standards. •The results relate only to the calibrated equipment as received

•The performance of the equipment stated in this report is checked with independent reference material and results compared against a calibrated secondary source.

"Displayed Reading" denotes the figure shown on item under calibration/ checking regardless of equipment precision or significant figures.

•The "Tolerance Limit" mentioned is the acceptance criteria applicable for similar equipment used by Quality Pro Test-Consult Ltd. or quoted form relevant international standards.

--- END OF REPORT ----



專業化驗有限公司 QUALITY PRO TEST-CONSULT LIMITED

Unit 10, 14/F, Wah Wai Centre, 38-40 Au Pui Wan St., Fotan, Hong Kong Email: info@qualityprotest.com; Website: www.qualityprotest.com Tel: (852) 3956 8717; Fax: (852) 3956 3928

# **REPORT OF EQUIPMENT PERFORMANCE CHECK/ CALIBRATION**

Test Report No. Date of Issue Page No. : R-BB070028 : 13 July 2022 : 1 of 2

#### **PART A - CUSTOMER INFORMATION**

Acuity Sustainability Consulting Limited Unit E, 12/F, Ford Glory Plaza 37-39 Wing Hong Street, Cheung Sha Wan Kowloon (HK) Hong Kong Attn :

### PART B - SAMPLE INFORMATION

Name of Equipment :
Manufacturer :
Serial Number :
Date of Received :
Date of Calibration :
Date of Next Calibration :

YSI ProDSS (Multi-Parameters) YSI (a xylem brand) 22C106561 08 July 2022 11 July 2022 10 October 2022

### PART C - REFERENCE METHODS/ DOCUMENTS FOR THE CALIBRATION

<u>Test Parameter</u>	Reference Method
Turbidity	APHA 21e 2130B
Dissolved oxygen	APHA 21e 4500 O
pH value	APHA 21e 4500 H+
Salinity	APHA 21e 2520B
Temperature	Section 6 of international Accreditation New Zealand Technical Guide no. 3 Second edition March
	2008: Working Thermometer Calibration Procedure

### PART D - CALIBRATION RESULT

#### (1) Turbidity

Expected Reading (NTU)	Display Reading ( NTU )	Tolerance (%)	Result
0	0.13		Satisfactory
10	9.91	-0.90	Satisfactory
20	19.52	-2.40	Satisfactory
100	96.50	-3.50	Satisfactory
800	783.45	-2.10	Satisfactory

Tolerance of Turbidity should be less than  $\pm$  10.0 ( % )

#### (2) Dissolved oxygen

Expected Reading ( mg/L )	Display Reading ( mg/L )	Tolerance	Result
7.71	7.67	-0.04	Satisfactory
4.57	4.88	0.31	Satisfactory
2.73	2.67	-0.06	Satisfactory
0.05	0.26	0.21	Satisfactory

Tolerance of Dissolved oxygen should be less than  $\pm \mbox{ 0.5 ( mg/L )}$ 

#### (3) pH value

Target ( pH unit )	Display Reading ( pH unit )	Tolerance	Result

--- CONTINUED ON NEXT PAGE ---

AUTHORIZED SIGNATORY:

LEE Chun-ning

Assistant Manager (Chemical Testing)



# **REPORT OF EQUIPMENT PERFORMANCE CHECK/ CALIBRATION**

	Test Report No. Date of Issue Page No.	: R-BB070028 : 13 July 2022 : 2 of 2	
Target ( pH unit )	Display Reading ( pH unit )	Tolerance	Result
4.00	3.97	-0.03	Satisfactory
7.42	7.49	0.07	Satisfactory
10.01	10.07	0.06	Satisfactory

Tolerance of pH value should be less than  $\pm$  0.2 ( pH unit )

#### (4) Salinity

Expected Reading (g/L)	Display Reading (g/L)	Tolerance ( % )	Result
10	9.72	-2.80	Satisfactory
20	20.35	1.75	Satisfactory
30	31.26	4.20	Satisfactory

Tolerance of Salinity should be less than  $\pm$  10.0 (%)

#### (5) Temperature

Reading of Ref. thermometer ( °C )	Display Reading ( °C )	Tolerance	Result
16.0	15.8	-0.2	Satisfactory
26.0	25.7	-0.3	Satisfactory
32.1	32.0	-0.1	Satisfactory

Tolerance of Temperature should be less than  $\pm$  2.0 ( °C )

#### Remark(s)

•The "Date of Next Calibration" is recommended according to best practice principals as practiced by QPT or quoted form relevant international standards. •The results relate only to the calibrated equipment as received

The performance of the equipment stated in this report is checked with independent reference material and results compared against a calibrated secondary source.

"Displayed Reading" denotes the figure shown on item under calibration/ checking regardless of equipment precision or significant figures.

•The "Tolerance Limit" mentioned is the acceptance criteria applicable for similar equipment used by Quality Pro Test-Consult Ltd. or quoted form relevant international standards.

--- END OF REPORT ---



專業化驗有限公司 QUALITY PRO TEST-CONSULT LIMITED

Unit 10, 14/F, Wah Wai Centre, 38-40 Au Pui Wan St., Fotan, Hong Kong Email: info@qualityprotest.com; Website: www.qualityprotest.com Tel: (852) 3956 8717; Fax: (852) 3956 3928

### **REPORT OF EQUIPMENT PERFORMANCE CHECK/ CALIBRATION**

Test Report No. Date of Issue Page No. : R-BB060031 : 17 June 2022 : 1 of 2

#### **PART A - CUSTOMER INFORMATION**

Acuity Sustainability Consulting Limited Unit E, 12/F, Ford Glory Plaza 37-39 Wing Hong Street, Cheung Sha Wan Kowloon (HK) Hong Kong Attn :

#### **PART B - SAMPLE INFORMATION**

Name of Equipment :	HORIBA U-53
Manufacturer :	HORIBA
Serial Number :	NEKVM2XU
Date of Received :	15 June 2022
Date of Calibration :	15 June 2022
Date of Next Calibration :	14 September 2022

#### PART C - REFERENCE METHODS/ DOCUMENTS FOR THE CALIBRATION

<u>Test Parameter</u>	Reference Method
Turbidity	APHA 21e 2130B
Dissolved oxygen	APHA 21e 4500 O
pH value	APHA 21e 4500 H+
Salinity	APHA 21e 2520B
Temperature	Section 6 of international Accreditation New Zealand Technical Guide no. 3 Second edition March
	2008: Working Thermometer Calibration Procedure

#### PART D - CALIBRATION RESULT

#### (1) Turbidity

EXPECTED READING ( NTU )	DISPLAY READING (NTU)	TOLERANCE (%)	RESULT
0	0.00		Satisfactory
10	10.70	7.0	Satisfactory
20	21.00	5.0	Satisfactory
100	109.00	9.0	Satisfactory
800	796.00	-0.5	Satisfactory

Tolerance of Turbidity should be less than  $\pm$  10.0 ( % )

#### (2) Dissolved oxygen

EXPECTED READING (MG/L)	DISPLAY READING ( MG/L )	TOLERANCE	RESULT
8.17	8.20	0.03	Satisfactory
5.58	5.50	-0.08	Satisfactory
3.53	3.30	-0.23	Satisfactory
0.08	0.00	-0.08	Satisfactory

Tolerance of Dissolved oxygen should be less than  $\pm \mbox{ 0.5 ( mg/L )}$ 

#### (3) pH value

TARGET ( PH UNIT )	DISPLAY READING ( PH UNIT )		RESULT
	D ON NEVT DACE		

--- CONTINUED ON NEXT PAGE ---

AUTHORIZED SIGNATORY:

LEE Chunning

Assistant Manager (Chemical Testing)



## **REPORT OF EQUIPMENT PERFORMANCE CHECK/ CALIBRATION**

Test Report No.
Date of Issue
Page No.

: R-BB060031 : 17 June 2022 : 2 of 2

TARGET ( PH UNIT )	DISPLAY READING ( PH UNIT )	TOLERANCE	RESULT
4.00	4.00	0.00	Satisfactory
7.42	7.42	0.00	Satisfactory
10.01	10.16	0.15	Satisfactory

Tolerance of pH value should be less than  $\pm 0.2$  (pH unit )

#### (4) Salinity

EXPECTED READING ( G/L )	DISPLAY READING (G/L)	TOLERANCE (%)	RESULT
10	9.04	-9.60	Satisfactory
20	18.93	-5.35	Satisfactory
30	29.25	-2.50	Satisfactory

Tolerance of Salinity should be less than  $\pm$  10.0 ( % )

#### (5) Temperature

READING OF REF. THERMOMETER ( °C )	DISPLAY READING ( °C )	TOLERANCE	RESULT
16.0	16.07	0.07	Satisfactory
24.0	23.99	-0.01	Satisfactory
34.0	33.73	-0.27	Satisfactory

Tolerance of Temperature should be less than  $\pm$  2.0 ( °C )

#### Remark(s)

•The "Date of Next Calibration" is recommended according to best practice principals as practiced by QPT or quoted form relevant international standards. •The results relate only to the calibrated equipment as received

•The performance of the equipment stated in this report is checked with independent reference material and results compared against a calibrated secondary source.

"Displayed Reading" denotes the figure shown on item under calibration/ checking regardless of equipment precision or significant figures.

•The "Tolerance Limit" mentioned is the acceptance criteria applicable for similar equipment used by Quality Pro Test-Consult Ltd. or quoted form relevant international standards.

--- END OF REPORT ---

Appendix G Event / Action Plan for Water Quality Exceedance

Event		Act	ion	
	ET	IEC	SO	Contractor
Action level being exceeded by one sampling day	Repeat in-situ measurement to confirm findings; Identify source(s) of impact; Inform IEC and Contractor; Check monitoring data, all plant, equipment and Contractor's working methods; Discuss mitigation measures with IEC and Contractor; Repeat measurement on next day of exceedance. (The above actions should be taken within 1 working day after the exceedance is identified)	Discuss with ET and Contractor on the mitigation measures; Review proposals on mitigation measures submitted by Contractor and advise the SO accordingly; Assess the effectiveness of the implemented mitigation measures. (The above actions should be taken within 1 working day after the exceedance is identified)	Discuss with IEC on the proposed mitigation measures; Make agreement on the mitigation measures to be implemented. (The above actions should be taken within 1 working day after the exceedance is identified)	Inform the SO and confirm notification of the non- compliance in writing; Rectify unacceptable practice; Check all plant and equipment; Consider changes of working methods; Discuss with ET and IEC and propose mitigation measures to IEC and SO within 3 working days; Implement the agreed mitigation measures. (The above actions should be taken within 1 working day after the exceedance is identified)
Action level being exceeded by more than one consecutive sampling days	Identify source(s) of impact; Inform IEC and Contractor; Check monitoring data, all plant, equipment and Contractor's working methods; Discuss mitigation measures with IEC and Contractor; Ensure mitigation measures are implemented; Prepare to increase the monitoring frequency to daily; Repeat measurement on next working day of exceedance. (The above actions should be taken within 1 working day after Action Level being exceeded by two consecutive sampling days)	Discuss with ET and Contractor on the mitigation measures; Review proposals on mitigation measures submitted by Contractor and advise the SO accordingly; Assess the effectiveness of the implemented mitigation measures. (The above actions should be taken within 1 working day after Action Level being exceeded by two consecutive sampling days)	Discuss with IEC on the proposed mitigation measures; Make agreement on the mitigation measures to be implemented. Assess the effectiveness of the implemented mitigation measures. (The above actions should be taken within 1 working day after Action Level being exceeded by two consecutive sampling days)	Inform the SO and confirm notification of the non- compliance in writing; Rectify unacceptable practice; Check all plant and equipment; Consider changes of working methods; Discuss with ET and IEC and propose mitigation measures to IEC and SO within 3 working days; Implement the agreed mitigation measures. (The above actions should be taken within 1 working day after Action Level being exceeded by two consecutive sampling days)

Contract No. EP/SP/66/12 Integrated Waste Management Facilities, Phase 1

Keppel Seghers – Zhen Hua Joint Venture

Event		Ac	tion	
	ET	IEC	SO	Contractor
Limit level	Inform the SO and confirm	Discuss with ET and	Discuss with IEC, ET and	Inform the SO and confirm
being exceeded	notification of the non-	Contractor on the mitigation	Contractor on the proposed	notification of the non-
by one	compliance in writing;	measures;	mitigation measures;	compliance in writing;
sampling day	Rectify unacceptable practice;	Review proposals on	Request Contractor to	Rectify unacceptable practice;
	Check all plant and	mitigation measures submitted	critically review the working	Check all plant and
	equipment;	by Contractor and advise the	methods;	equipment;
	Consider changes of working	SO accordingly;	Make agreement on the	Consider changes of working
	methods;	Assess the effectiveness of	mitigation measures to be	methods;
	Discuss with Contractor, IEC	the implemented mitigation	implemented.	Discuss with ET, IEC and SO
	and SO and propose	measures.	Assess the effectiveness of	and propose mitigation
	mitigation measures to IEC	(The above actions should be	the implemented measures.	measures to IEC and SO
	and SO within 3 working days;	taken within 1 working day	(The above actions should be	within 3 working days;
	Implement the agreed	after the exceedance is	taken within 1 working day	Implement the agreed
	mitigation measures.	identified)	after the exceedance is	mitigation measures.
	(The above actions should be		identified)	(The above actions should be
	taken within 1 working day			taken within 1 working day
	after the exceedance is			after the exceedance is
	identified)			identified)

Event		Act	ion	
	ET	IEC	SO	Contractor
Limit level	Identify source(s) of impact;	Discuss with ET and	Discuss with IEC, ET and	Inform the SO and confirm
being exceeded	Inform IEC, Contractor and	Contractor on the mitigation	Contractor on the proposed	notification of the non-
by more than	EPD;	measures;	mitigation measures;	compliance in writing;
one	Check monitoring data, all	Review proposals on	Request Contractor to	Rectify unacceptable practice;
consecutive	plant, equipment and	mitigation measures submitted	critically review the working	Check all plant and
sampling days	Contractor's working methods.	by Contractor and advise the	methods;	equipment;
	Discuss mitigation measures	SO accordingly;	Make agreement on the	Consider changes of working
	with IEC, SO and Contractor.	Assess the effectiveness of	mitigation measures to be	methods;
	Ensure mitigation measures	the implemented mitigation	implemented.	Discuss with ET, IEC and SO
	are implemented;	measures.	Assess the effectiveness of	and propose mitigation
	Increase the monitoring	(The above actions should be	the implemented measures.	measures to IEC and SO
	frequency to daily until no	taken within 1 working day	Consider and instruct, if	within 3 working days;
	exceedance of Limit level for	after Limit Level being	necessary, the Contractor to	Implement the agreed
	two consecutive days.	exceeded by two consecutive	slow down or to stop all or part	mitigation measures;
	(The above actions should be	sampling days)	of the marine work until no	As directed by the SOR, to
	taken within 1 working day		exceedance of Limit level.	slow down or to stop all or part
	after Limit Level being		(The above actions should be	of the marine work or
	exceeded by two consecutive		taken within 1 working day	construction activities.
	sampling days)		after Limit Level being	(The above actions should be
			exceeded by two consecutive	taken within 1 working day
			sampling days)	after Limit Level being
				exceeded by two consecutive
				sampling days)

# Appendix H Noise Monitoring Equipment Calibration Certificate

# **Certificate of Calibration**

#### for

Description:	Sound Level Meter
Manufacturer:	SVANTEK
Type No.:	971 (Serial No.: 96063)
Microphone:	ACO 7052 E (Serial No.: 78092)
Preamplifier:	SVANTEK SV 18 (Serial No.:97278)

## Submitted by:

Customer:	Acuity Sustainability Consulting Limited
Address:	Unit E, 12/F., Ford Glory Plaza,
	Nos. 37-39 Wing Hong Street,
	Cheung Sha Wan, Kowloon, Hong Kong

Upon receipt for calibration, the instrument was found to be:

$\checkmark$	Within
	Outside

#### the allowable tolerance.

The test equipment used for calibration are traceable to National Standards via:

- The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory

Date of receipt: 21 June 2022

Date of calibration: 27 June 2022

Date of NEXT calibration: 26 June 2023

Calibrated by: alibration Technician

Date of issue: 27 June 2022

Certificate No.: APJ22-029-CC001

Certified by:

Mr. Tang Cheuk Hang Quality Manager



Page 1 of 4

# (A+A)\*L Acoustics and Air Testing Laboratory Co. Ltd. 聲學及空氣測試實驗室有限公司

#### 1. Calibration Precaution:

- The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 24 hours, and switched on to warm up for over 10 minutes before the commencement of the test.
- The results presented are the mean of 3 measurements at each calibration point.

#### 2. Calibration Conditions:

Air Temperature:	24.2 °C
Air Pressure:	1004 <b>hPa</b>
<b>Relative Humidity:</b>	60.8 %

#### 3. Calibration Equipment:

	Туре	Serial No.	Calibration Report Number	Traceable to
Multifunction Calibrator	B&K 4226	2288467	AV200041	HOKLAS

## 4. Calibration Results

Sound Pressure Level

Reference Sound Pressure Level

Setting of Unit-under-test (UUT)			Appl	ied value	UUT Reading,	IEC 61672 Class 1	
Range, dB	Freq. W	eighting	Time Weighting	Level, dB	Frequency, Hz	dB	Specification, dB
25-124.5	dBA	SPL	Fast	94	1000	93.7	±0.4

Linearity

Setting of Unit-under-test (UUT)			Applied value		UUT Reading,	IEC 61672 Class 1	
Range, dB	Freq.	Weighting	Time Weighting	Level, dB	Frequency, Hz	dB	Specification, dB
				94		93.7	Ref
25-124.5	dBA	SPL	Fast	104	1000	103.7	±0.3
			114		113.7	±0.3	

Time Weighting

Setting of Unit-under-test (UUT)			Applied value		UUT Reading,	IEC 61672 Class 1	
Range, dB	Freq. W	eighting	Time Weighting	Level, dB	Frequency, Hz	dB	Specification, dB
25 124 5	A CIL	CDI	Fast	0.4	1000	93.7	Ref
25-124.5	dBA SH	SPL	Slow	94	1000	93.7	±0.3

Certificate No.: APJ22-029-CC001



Page 2 of 4



Frequency Response

#### Linear Response

Setting of Unit-under-test (UUT)			Appl	Applied value		IEC 61672 Class 1	
Range, dB	Freq. We	eighting	Time Weighting	Level, dB	Frequency, Hz	dB	Specification, dB
					31.5	94.1	±2.0
					63	94.0	±1.5
					125	94.0	±1.5
					250	94.0	±1.4
25-124.5	dB	SPL	Fast	94	500	93.9	±1.4
					1000	93.7	Ref
					2000	93.7	±1.6
					4000	95.5	±1.6
					8000	92.3	+2.1; -3.1

A-weighting

Setting of Unit-under-test (UUT)			Appl	Applied value		IEC 61672 Class 1	
Range, dB	Freq. W	eighting	Time Weighting	Level, dB	Frequency, Hz	dB	Specification, dB
					31.5	54.8	-39.4 ±2.0
					63	67.9	-26.2±1.5
					125	77.9	-16.1±1.5
					250	85.3	-8.6±1.4
25-124.5	dBA	SPL	Fast	94	500	90.7	$-3.2 \pm 1.4$
					1000	93.7	Ref
					2000	95.0	$+1.2 \pm 1.6$
					4000	96.6	$+1.0 \pm 1.6$
					8000	91.3	-1.1+2.1; -3.1

C-weighting

Setting of Unit-under-test (UUT)			Appl	Applied value		IEC 61672 Class 1	
Range, dB	Freq. W	eighting	Time Weighting	Level, dB	Frequency, Hz	dB	Specification, dB
					31.5	91.1	-3.0 ±2.0
					63	93.2	$-0.8 \pm 1.5$
					125	93.8	-0.2 ±1.5
					250	94.0	$-0.0 \pm 1.4$
25-124.5	dBC	SPL	Fast	94	500	93.9	-0.0±1.4
					1000	93.7	Ref
					2000	93.6	-0.2 ±1.6
					4000	94.8	-0.8±1.6
					8000	89.4	-3.0+2.1; -3.1

Certificate No.: APJ22-029-CC001



Page 3 of 4

Room 422,Leader Industrial Centre,57-59 Au Pui Wan Street ,Fo Tan, Shatin,N.T.,Hong Kong Tel: (852) 2668 3423 Fax:(852) 2668 6946 Homepage: http://www.aa-lab.com E-mail : inquiry@aa-lab.com

# (A+A)\*L Acoustics and Air Testing Laboratory Co. Ltd. 聲學及空氣測試實驗室有限公司

## 5. Calibration Results Applied

The results apply to the particular unit-under-test only. All calibration points are within manufacture's specification as IEC 61672 Class 1.

Uncertainties of Applied Value:

94 dB	31.5 Hz	± 0.10
	63 Hz	± 0.05
	125 Hz	$\pm 0.05$
	250 Hz	± 0.05
	500 Hz	± 0.05
	1000 Hz	± 0.05
	2000 Hz	± 0.05
	4000 Hz	± 0.05
	8000 Hz	± 0.10
104 dB	1000 Hz	± 0.05
114 dB	1000 Hz	± 0.05

The uncertainties are evaluated for a 95% confidence level.

Note:

The values given in this certification only related to the values measured at the time of the calibration and any uncertainties quoted will not allow for the equipment long-term drift, variations with environmental changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the calibration. (A+A)\*L shall not be liable for any loss or damage resulting from the use of the equipment.



Page 4 of 4

Certificate No.: APJ22-029-CC001

# **Certificate of Calibration**

#### for

Description:	Sound Level Meter
Manufacturer:	SVANTEK
Type No.:	971 (Serial No.: 96062)
Microphone:	ACO 7052 E (Serial No.: 79778)
Preamplifier:	SVANTEK SV 18 (Serial No.:97276)

### Submitted by:

Customer:	Acuity Sustainability Consulting Limited
Address:	Unit E, 12/F., Ford Glory Plaza,
	Nos. 37-39 Wing Hong Street,
	Cheung Sha Wan, Kowloon, Hong Kong

#### Upon receipt for calibration, the instrument was found to be:

✓ Within (31.5 Hz to 4k Hz)□ Outside

#### the allowable tolerance.

The test equipment used for calibration are traceable to National Standards via:

- The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory

Date of receipt: 21 June 2022

Date of calibration: 27 June 2022

Date of NEXT calibration: 26 June 2023

Calibrated by: Calibration Technician

Date of issue: 27 June 2022

Certificate No.: APJ22-029-CC002

0 Certified by:

Mr. Tang Cheuk Hang Quality Manager



Page 1 of 4

F	Room 422, Leader Industrial Centre, 57-59 Au Pui Wan Street	Fo Tan, Shatin, N.T., Hong Kong
	Tel: (852) 2668 3423	Fax:(852)26686946
	Homepage: http://www.aa-lab.com	E-mail: inquiry@aa-lab.com

### Calibration Precaution:

- The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 24 hours, and switched on to warm up for over 10 minutes before the commencement of the test.
- The results presented are the mean of 3 measurements at each calibration point.

#### 1. Calibration Conditions:

Air Temperature:	24.2 °C
Air Pressure:	1004 <b>hPa</b>
<b>Relative Humidity:</b>	60.8 %

#### 2. Calibration Equipment:

	Туре	Serial No.	Calibration Report Number	Traceable to
Multifunction Calibrator	B&K 4226	2288467	AV200041	HOKLAS

### 3. Calibration Results

Sound Pressure Level

Reference Sound Pressure Level

Setting of Unit-under-test (UUT)			Applied value		UUT Reading,	IEC 61672 Class 1	
Range, dB	Freq.	Weighting	Time Weighting	Level, dB	Frequency, Hz	dB	Specification, dB
25-124.5	dBA	SPL	Fast	94	1000	94.0	±0.4

Linearity

Setting of Unit-under-test (UUT)			Appl	ied value	UUT Reading,	IEC 61672 Class 1	
Range, dB	Freq. W	eighting	Time Weighting	Level, dB	Frequency, Hz	dB	Specification, dB
				94		94.0	Ref
25-124.5	dBA	SPL	Fast	104	1000	104.0	±0.3
				114		114.0	±0.3

Time Weighting

Setting of Unit-under-test (UUT)			Applied value		UUT Reading,	IEC 61672 Class 1	
Range, dB	Freq. W	eighting	Time Weighting	Level, dB	Frequency, Hz	dB	Specification, dB
25 124 5	dBA	CDI	Fast	0.4	1000	94.0	Ref
25-124.5	uва	SPL	Slow	94	1000	94.0	±0.3

Certificate No.: APJ22-029-CC002



Page 2 of 4



Frequency Response

Linear Response

Sett	Setting of Unit-under-test (UUT)			Appl	Applied value		IEC 61672 Class 1
Range, dB	Freq. W	eighting	Time Weighting	Level, dB	Frequency, Hz	dB	Specification, dB
					31.5	94.3	±2.0
					63	94.2	±1.5
			125	94.1	±1.5		
25-124.5	25-124.5 dB SPL	Fast	94	250	94.1	±1.4	
25-124.5	uВ	SFL	rast	94	500	94.0	±1.4
					1000	94.0	Ref
			2000	93.7	±1.6		
					4000	93.1	±1.6

A-weighting

Sett	Setting of Unit-under-test (UUT)			Applied value		UUT Reading,	IEC 61672 Class 1			
Range, dB	Freq. V	Veighting	Time Weighting	Level, dB	Frequency, Hz	dB	Specification, dB			
					31.5	54.9	-39.4 ±2.0			
					63	68.0	-26.2±1.5			
					125	78.0	-16.1±1.5			
25-124.5	25-124.5 dBA SPL Fast	Fast	94	250	85.4	-8.6±1.4				
23-124.3	UDA	SFL	rasi	94	500	90.8	$-3.2 \pm 1.4$			
			100					1000	94.0	Ref
								2000	94.9	$+1.2 \pm 1.6$
		-			4000	94.2	$+1.0 \pm 1.6$			

C-weighting

Setting of Unit-under-test (UUT)			Applied value		UUT Reading,	IEC 61672 Class 1				
Range, dB	Freq. W	eighting	Time Weighting	Level, dB	Frequency, Hz	dB	Specification, dB			
					31.5	91.3	-3.0 ±2.0			
								63	93.4	-0.8±1.5
	25-124.5 dBC SPL	<b>F</b>		125	93.9	-0.2±1.5				
25-124.5			94	250	94.1	$-0.0 \pm 1.4$				
25-124.5	ubc	SFL	Fast		500	94.1	$-0.0 \pm 1.4$			
					1000	94.0	Ref			
					2000	93.6	$-0.2 \pm 1.6$			
					4000	92.4	-0.8±1.6			

Certificate No.: APJ22-029-CC002



Page 3 of 4

# (A+A)\*L Acoustics and Air Testing Laboratory Co. Ltd. 聲學及空氣測試實驗室有限公司

## 4. Calibration Results Applied

The results apply to the particular unit-under-test only. All calibration points are within manufacture's specification as IEC 61672 Class 1.

Uncertainties of Applied Value:

94 dB	31.5 Hz	± 0.15
	63 Hz	± 0.05
	125 Hz	± 0.05
	250 Hz	± 0.05
	500 Hz	$\pm$ 0.05
	1000 Hz	± 0.05
	2000 Hz	± 0.05
	4000 Hz	± 0.10
104 dB	1000 Hz	± 0.05
114 dB	1000 Hz	± 0.05

The uncertainties are evaluated for a 95% confidence level.

Note:

The values given in this certification only related to the values measured at the time of the calibration and any uncertainties quoted will not allow for the equipment long-term drift, variations with environmental changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the calibration. (A+A)\*L shall not be liable for any loss or damage resulting from the use of the equipment.



Page 4 of 4

Certificate No.: APJ22-029-CC002



# Certificate of Calibration

#### for

Description:	Sound Level Meter
Manufacturer:	SVANTEK
Type No.:	971 (Serial No.: 103482)
Microphone:	ACO 7052E (Serial No.: 79788)
Preamplifier:	SV18 (Serial No.: 103880)

Submitted by:Customer:Acuity Sustainability Consulting LimitedAddress:Unit 1908, Nos. 301-305 Castle Peak Road, Kwai Chung, N.T.

Upon receipt for calibration, the instrument was found to be:

✓ Within (31.5 Hz to 4000Hz)□ Outside

#### the allowable tolerance.

The test equipment used for calibration are traceable to National Standards via:

- The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory

Date of receipt: 9 March 2022

Date of calibration: 11 March 2022

Calibrated by: Calibration Technician

Certified by:

Mr. Ng Yan Wa Laboratory Manager



Certificate No.: APJ21-163-CC001

Date of issue: 11 March 2022

Page 1 of 4

## (A+A)\*L Acoustics and Air Testing Laboratory Co. Ltd. 聲學及空氣測試實驗室有限公司

### 1. Calibration Precaution:

- The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 24 hours, and switched on to warm up for over 10 minutes before the commencement of the test.
- The results presented are the mean of 3 measurements at each calibration point.

#### 2. Calibration Conditions:

Air Temperature:	23 °C
Air Pressure:	1006 <b>hPa</b>
<b>Relative Humidity:</b>	65 %

#### 3. Calibration Equipment:

	Туре	Serial No.	Calibration Report Number	Traceable to
Multifunction Calibrator	B&K 4226	2288467	AV200041	HOKLAS

### 4. Calibration Results

Sound Pressure Level

Reference Sound Pressure Level

Setting of Unit-under-test (UUT)		Applied value		UUT Reading,	IEC 61672 Class 1		
Range, dB	Freq.	Weighting	Time Weighting	Level, dB	Frequency, Hz	dB	Specification, dB
25-124	dBA	SPL	Fast	94	1000	94.0	±0.4

Linearity

Setting of Unit-under-test (UUT)			Appl	Applied value		IEC 61672 Class 1	
Range, dB	Freq. W	eighting	Time Weighting	Level, dB	Frequency, Hz	dB	Specification, dB
				94		94.0	Ref
25-124	dBA	SPL	Fast	104	1000	104.0	±0.3
				114		114.0	±0.3

Time Weighting

Setting of Unit-under-test (UUT)			Applied value		UUT Reading,	IEC 61672 Class 1	
Range, dB	Freq. V	Weighting	Time Weighting	Level, dB	Frequency, Hz	dB	Specification, dB
25-124	dBA	SPL	Fast	94	1000	94.0	Ref
23-124	UDA	SFL	Slow	94	1000	94.0	±0.3

Certificate No.: APJ21-163-CC001

(A+A) \*L Page 2 of 4



Frequency Response

#### Linear Response


Sett	Setting of Unit-under-test (UUT)		Appl	ied value	UUT Reading,	IEC 61672 Class 1												
Range, dB	Freq. W	eighting	Time Weighting	Level, dB	Frequency, Hz	dB	Specification, dB											
					31.5	94.4	±2.0											
					63	94.3	±1.5											
					125	94.2	±1.5											
25-124	dB	SPL	Fact	94	250	94.1	±1.4											
23-124	uБ	SPL	Fast	rasi	Tasi	rasi	1 451	1 451	1 451	1 451	1 451	Tast	rasi	rast	94	500	94.1	±1.4
					1000	94.0	Ref											
					2000	93.7	±1.6											
					4000	93.0	±1.6											

#### A-weighting

Setting of Unit-under-test (UUT)		Appl	ied value	UUT Reading,	IEC 61672 Class 1		
Range, dB	Freq. W	eighting	Time Weighting	Level, dB	Frequency, Hz	dB	Specification, dB
					31.5	55.0	-39.4 ±2.0
					63	68.0	$-26.2 \pm 1.5$
					125	78.0	-16.1±1.5
25-124	dBA	SPL	Fast	94	250	85.4	-8.6±1.4
23-124	UDA	SFL	rasi	94	500	90.8	$-3.2 \pm 1.4$
					1000	94.0	Ref
					2000	94.8	$+1.2 \pm 1.6$
					4000	94.0	$+1.0 \pm 1.6$

#### C-weighting

Setting of Unit-under-test (UUT)			Appl	ied value	UUT Reading,	IEC 61672 Class 1	
Range, dB	Freq. V	Veighting	Time Weighting	Level, dB	Frequency, Hz	dB	Specification, dB
					31.5	91.4	-3.0±2.0
					63	93.5	-0.8±1.5
					125	94.0	-0.2±1.5
25-124	dBC	SPL	Fast	94	250	94.1	$-0.0 \pm 1.4$
23-124	ube	SFL	Tast	74	500	94.1	$-0.0 \pm 1.4$
					1000	94.0	Ref
					2000	93.6	-0.2 ±1.6
					4000	92.2	$-0.8 \pm 1.6$





Page 3 of 4

## (A+A)\*L Acoustics and Air Testing Laboratory Co. Ltd. 聲學及空氣測試實驗室有限公司

## 5. Calibration Results Applied

The results apply to the particular unit-under-test only. All calibration points are within manufacture's specification as IEC 61672 Class 1.

Uncertainties of Applied Value:

94 dB	31.5 Hz	± 0.05
	63 Hz	± 0.05
	125 Hz	± 0.05
	250 Hz	± 0.05
	500 Hz	± 0.05
	1000 Hz	± 0.05
	2000 Hz	± 0.05
	4000 Hz	± 0.05
104 dB	1000 Hz	± 0.05
114 dB	1000 Hz	± 0.05

The uncertainties are evaluated for a 95% confidence level.

Note:

The values given in this certification only related to the values measured at the time of the calibration and any uncertainties quoted will not allow for the equipment long-term drift, variations with environmental changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the calibration. (A+A)\*L shall not be liable for any loss or damage resulting from the use of the equipment.



Page 4 of 4

Certificate No.: APJ21-163-CC001



قب أ

# **CALIBRATION CERTIFICATE**

Certificate Informat	tion			
Date of Issue	27-Apr-2022		Certificate Number	MLCN220926S
Customer Informati	on			
Company Name Address	Unit C, 11/F., F Nos. 37-39 Win	ability Consulting Lir Ford Glory Plaza, ng Hing Street, an, Kowloon, HK	nited	
Equipment-under-T	est (EUT)			
Description Manufacturer Model Number Serial Number Equipment Number	Sound Calibrate Svantek SV 33B 83042 	or		
Calibration Particul	ar			
Date of Calibration Calibration Equipment		8) / AV200063 / 23-Ju 0) / MLEC21/05/02 /		
Calibration Procedure	MLCG00, MLC	CG15		
Calibration Conditions	Laboratory EUT	Temperature Relative Humidity Stabilizing Time Warm-up Time	$23 \text{ °C} \pm 5 \text{ °C}$ $55\% \pm 25\%$ Over 3 hours Not applicable	
Calibration Results	Calibration data All calibration re	Power Supply were detailed in the o esults were within EU	Internal battery continuation pages. JT specification.	
Approved By & Date		_	С. К.О. Lo	27-Apr-2022
overloading, mishandling, m * MaxLab Calibration Centre	on Certificate only re EUT long term drif isuse, and the capaci Limited shall not be s owned by MaxLab	late to the values measure t, variation with environn ity of any other laboratory liable for any loss or dam o Calibration Centre Limit	ed at the time of the calibration and the un	certainties quoted will g transportation,

Page 1 of 2





#### Certificate No. MLCN220926S

EUT	Standard	EUT Error	Calibration	EUT
Setting	Reading		Uncertainty	Specification
114 dB	114.0 dB	0.0 dB	0.15 dB	± 0.3 dE

- END -

i ni

Calibrated By : Dan Date : 27-Apr-22

Checked By : K.O. Lo Date : 27-Apr-22

Page 2 of 2



# Appendix I Event / Action Plan for Noise Exceedance

Event Action	Actions to be taken by Environmental Team as immediate as practicable	Actions to be taken by Independent Environmental Checker as immediate as practicable 1. Review the investigation results	Actions to be taken by Supervising Officer's Representative as immediate as practicable 1. Confirm receipt of notification of	Actions to be taken by Contractor as immediate as practicable 1. Submit noise mitigation
Level being exceeded	2. Carry out investigation;	<ul> <li>submitted by the ET;</li> <li>Review the proposed remedial measures by the Contractor and advise the SO accordingly;</li> <li>Advise the SO on the effectiveness of the proposed remedial</li> </ul>	failure in writing;	<ul> <li>proposals to IEC and SO;</li> <li>Implement noise mitigation proposals.</li> <li>(The above actions should be taken within 2 working days after the exceedance is identified)</li> </ul>
exceeded	<ol> <li>Inform IEC, SO, Contractor and EPD;</li> <li>Repeat measurements to confirm findings;</li> <li>Increase monitoring frequency;</li> <li>Identify source and investigate the cause of exceedance;</li> <li>Carry out analysis of Contractor's working procedures;</li> <li>Discuss with the IEC, Contractor and SO on remedial measures required;</li> <li>Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and SO informed of the results;</li> <li>If exceedance stops, cease additional monitoring. (The above actions should be taken within 2 working days after the exceedance is identified)</li> </ol>	<ol> <li>Review Contractors remedial actions whenever necessary to assure their effectiveness and advise the SO accordingly. (The above actions should be taken within 2 working days after</li> </ol>	<ol> <li>In consolidation with the IEC, agree with the Contractor on the remedial measures to be implemented;</li> <li>Supervise the implementation of</li> </ol>	<ol> <li>Take immediate action to avoid further exceedance;</li> <li>Submit proposals for remedial actions to IEC and SO within 3 working days of notification;</li> <li>Implement the agreed proposals;</li> <li>Submit further proposal if problem still not under control;</li> <li>Stop the relevant portion of works as instructed by the SO until the exceedance is abated. (The above actions should be taken within 2 working days after the exceedance is identified)</li> </ol>

# Appendix J Noise Monitoring Data

Location:	Shek Kwu Chau Treatment & Rehabilitation Centre Hostel 1 (M1 / $N_S1$ )
Monitoring date:	01, 19, 22, 29 August 2022 (Daytime)
	01&02, 19&20, 22&23, 29&30 August 2022 (Evening & Night time)
Parameter :	L <sub>eq 30min</sub> (Daytime), L <sub>eq 5min</sub> (Evening & Night time)
Noise source other than construction activities from the Project:	Nil

Noise Monitoring Data:

Date	Start time		End time	Weather	$\frac{L_{eq \ 30min}  dB(A)  / }{L_{eq \ 5min}  dB(A)}$	Sound Level Meter Used	Calibrator Used	
01 Aug 2022	13:04	-	13:34	Sunny	65.8	SVAN 971 (Serial No. 103482)	Svantek SV33B (No.83042)	
01 4	19:24	-	19:29		54.8	QUAN 071 (Carial	Constals CV22D	
01 Aug 2022	20:04	-	20:09	Fine	50.0	SVAN 971 (Serial No. 103482)	Svantek SV33B (No.83042)	
2022	21:09	-	21:14		50.9	100.103462)	(100.03042)	
02 4	1:09	-	1:14		51.8	QUAN 071 (Carial	Svantek SV33B	
02 Aug 2022	3:14	-	3:19	Fine	49.7	SVAN 971 (Serial		
2022	5:09	-	5:14		50.0	No. 103482)	(No.83042)	
19 Aug 2022	11:39	-	12:09	Sunny	61.5	SVAN 971 (Serial No. 96063)	Svantek SV33B (No.83042)	
10 4.00	19:14	-	19:19		54.5	SVAN 071 (Seriel	Svantek SV33B	
19 Aug 2022	20:09	-	20:14	Fine	55.0	SVAN 971 (Serial No. 96063)	(No.83042)	
	21:14	-	21:19		55.6	100.90003)		
20 4	1:19	-	1:24		54.8	QUAN 071 (Carial	Svantek SV33B	
20 Aug 2022	3:19	-	3:24	Fine	50.8	SVAN 971 (Serial		
2022	5:14	-	5:19		52.2	No. 96063)	(No.83042)	
22 Aug 2022	13:21	-	13:51	Sunny	63.2	SVAN 971 (Serial No. 103482)	Svantek SV33B (No.83042)	
22.4	19:21	-	19:26		58.8			
22 Aug	20:11	-	20:16	Fine	53.6	SVAN 971 (Serial	Svantek SV33B	
2022	21:06	-	21:11		58.8	No. 103482)	(No.83042)	
22 A	1:16	-	1:21		49.9	GVAN 071 (G 1		
23 Aug 2022	3:16	-	3:21	Fine	46.3	SVAN 971 (Serial	Svantek SV33B	
2022	5:11	-	5:16		49.4	No. 103482)	(No.83042)	
29 Aug 2022	13:26	-	13:56	Sunny	63.6	SVAN 971 (Serial No. 103482)	Svantek SV33B (No.83042)	
20.4	19:06	-	19:11		55.7			
30 Aug	20:11	-	20:16	Fine	53.2	SVAN 971 (Serial	Svantek SV33B	
2022	21:16	-	21:21	1	51.5	No. 103482)	(No.83042)	
20 4	1:16	-	1:21		48.4	QUAN 071 (0. 1	Constal CV22D	
30 Aug 2022	3:16	-	3:21	Fine	49.7	SVAN 971 (Serial	Svantek SV33B (No.83042)	
2022	5:06	-	5:11		51.2	No. 103482)		

Location:	Shek Kwu Chau Treatment & Rehabilitation Centre Hostel 2 (M2 / N_S2)
Monitoring date:	01, 19, 22, 29 August 2022 (Daytime)
	01&02, 19&20, 22&23, 29&30 August 2022 (Evening & Night time)
Parameter :	L <sub>eq 30min</sub> (Daytime), L <sub>eq 5min</sub> (Evening & Night time)
Noise source other than construction activities from the Project:	Nil

Noise Monitoring Data:


Date	Start time		End time	Weather	$\frac{L_{eq \ 30min}  dB(A)  / }{L_{eq \ 5min}  dB(A)}$	Sound Level Meter Used	Calibrator Used	
01 Aug 2022	13:15	-	13:45	Sunny	60.8	SVAN 971 (Serial No. 96063)	Svantek SV33B (No.83042)	
01 4	19:05	-	19:10		53.9	QUAN 071 (Carial	Constals CW22D	
01 Aug 2022	20:05	-	20:10	Fine	54.6	SVAN 971 (Serial No. 96063)	Svantek SV33B (No.83042)	
2022	21:05	-	21:10		54.7	INO. 90003)	(100.03042)	
02 4.02	1:10	-	1:15		51.7	SVAN 071 (Samal	Svantek SV33B	
02 Aug 2022	3:05	-	3:10	Fine	51.7	SVAN 971 (Serial No. 96063)	(No.83042)	
2022	5:10	-	5:15		52.7	NO. 90003)	(100.03042)	
19 Aug 2022	11:45	-	12:15	Sunny	56.2	SVAN 971 (Serial No. 96062)	Svantek SV33B (No.83042)	
10 4.02	19:15	-	19:20		54.1	SVAN 071 (Seriel	Svantek SV33B	
19 Aug 2022	20:20	-	20:25	Fine	54.7	SVAN 971 (Serial No. 96062)	(No.83042)	
	21:05	-	21:10		55.5	100.90002)		
20 4.02	1:15	-	1:20		53.1	SVAN 071 (Seriel	Svantek SV33B	
20 Aug 2022	3:15	-	3:20	Fine	52.8	SVAN 971 (Serial No. 96062)	(No.83042)	
2022	5:20	-	5:25		52.9	110. 90002)	(110.83042)	
22 Aug 2022	13:24	-	13:54	Sunny	59.7	SVAN 971 (Serial No. 96062)	Svantek SV33B (No.83042)	
22.4	19:09	-	19:14		57.8		Svantek SV33B (No.83042)	
22 Aug	20:14	-	20:19	Fine	54.9	SVAN 971 (Serial		
2022	21:04	-	21:09		56.4	No. 96062)		
22 4	1:14	-	1:19		52.8	QUAN 071 (Carial	Svantek SV33B	
23 Aug 2022	3:14	-	3:19	Fine	52.1	SVAN 971 (Serial No. 96062)	(No.83042)	
2022	5:14	-	5:19		52.6	NO. 90002)	(100.05042)	
29 Aug 2022	13:12	-	13:42	Sunny	58.0	SVAN 971 (Serial No. 96063)	Svantek SV33B (No.83042)	
20.4	19:07	-	19:12		53.2	GVAN 071 (G 1		
30 Aug 2022	20:07	-	20:12	Fine	54.0	SVAN 971 (Serial	Svantek SV33B	
2022	21:22	-	21:27	1	54.8	No. 96063)	(No.83042)	
20 4.11-	1:02	-	1:07		53.1	SVAN 071 (Set -1	Swantals SV22D	
30 Aug 2022	3:37	-	3:42	Fine	54.5	SVAN 971 (Serial No. 96063)	Svantek SV33B (No.83042)	
2022	5:27	-	5:32	]	55.4	110. 90005)		


Location:	Shek Kwu Chau Treatment & Rehabilitation Centre Hostel 3 (M3 / N_S3)
Monitoring date:	01, 19, 22, 29 August 2022 (Daytime)
	01&02, 19&20, 22&23, 29&30 August 2022 (Evening & Night time)
Parameter :	Leq 30min (Daytime), Leq 5min (Evening & Night time)
Noise source other than construction activities from	Air-conditioner

the Project:


Noise Monitoring data:

Date	Start time		End time	Weather	$\frac{L_{eq\;30min}dB(A)}{L_{eq\;5min}dB(A)}$	Sound Level Meter Used	Calibrator Used	
01 Aug 2022	13:13	-	13:43	Sunny	63.2	SVAN 971 (Serial No. 96062)	Svantek SV33B (No.83042)	
01 4.02	19:08	-	19:13		57.5	SVAN 071 (Seriel	Svantek SV33B	
01 Aug 2022	20:03	-	20:08	Fine	57.0	SVAN 971 (Serial No. 96062)	(No.83042)	
2022	21:03	-	21:08		54.8	100.90002)	(100.03042)	
02 4.02	1:23	-	1:28		57.1	SVAN 071 (Seriel	Svantek SV33B	
02 Aug 2022	3:03	-	3:08	Fine	56.8	SVAN 971 (Serial No. 96062)	(No.83042)	
2022	5:03	-	5:08		56.6	INO. 90002)	(100.85042)	
19 Aug 2022	12:06	-	12:36	Sunny	56.5	SVAN 971 (Serial No. 103482)	Svantek SV33B (No.83042)	
10 Aug	19:26	-	19:31		52.4	SVAN 071 (Sorial	Svantek SV33B	
19 Aug 2022	20:16	-	20:21	Fine	54.0	SVAN 971 (Serial No. 103482)	(No.83042)	
	21:06	-	21:11		54.3	NO. 103462)		
20 4.02	1:06	-	1:11		53.8	SVAN 071 (Samal	Svantek SV33B	
20 Aug 2022	3:11	-	3:16	Fine	51.5	SVAN 971 (Serial No. 103482)	(No.83042)	
2022	5:11	-	5:16		53.6	NO. 103462)	(100.03042)	
22 Aug 2022	13:16	-	13:46	Sunny	61.6	SVAN 971 (Serial No. 96063)	Svantek SV33B (No.83042)	
	19:11	-	19:16		55.2			
22 Aug	20:06	-	20:11	Fine	54.5	SVAN 971 (Serial	Svantek SV33B	
2022	21:01	-	21:06		49.7	No. 96063)	(No.83042)	
22.4	1:31	-	1:36		54.2			
23 Aug	3:11	-	3:16	Fine	54.6	SVAN 971 (Serial	Svantek SV33B	
2022	5:16	-	5:21		54.4	No. 96063)	(No.83042)	
29 Aug 2022	13:26	-	13:56	Sunny	59.3	SVAN 971 (Serial No. 96062)	Svantek SV33B (No.83042)	
20 4	19:06	-	19:11		49.0	QVAN 071 (Carial	Constals CW22D	
30 Aug 2022	20:06	-	20:11	Fine	50.8	SVAN 971 (Serial No. 96062)	Svantek SV33B	
2022	21:21	-	21:26	]	52.7	INO. 90002)	(No.83042)	
20 4112	1:06	-	1:11		54.9	SVAN 971 (Serial	Sugnal SV22D	
30 Aug 2022	3:16	-	3:21	Fine	41.6	No. 96062)	Svantek SV33B (No.83042)	
2022	5:01	-	5:06		44.4	110. 90002)		

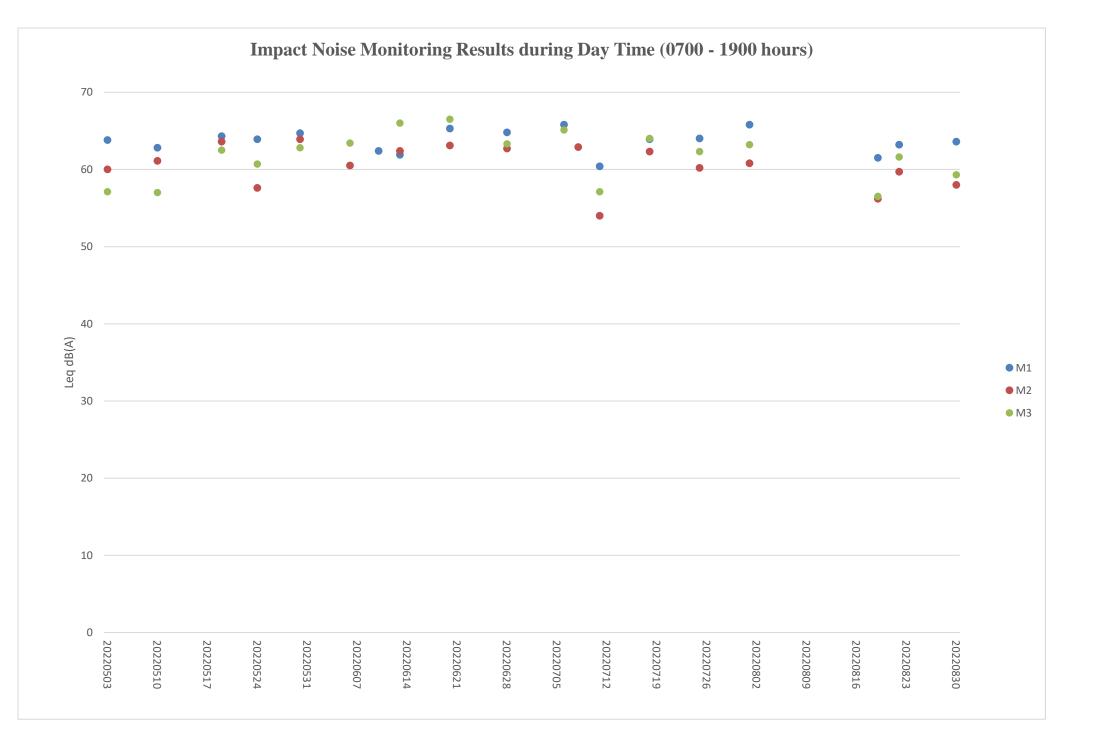

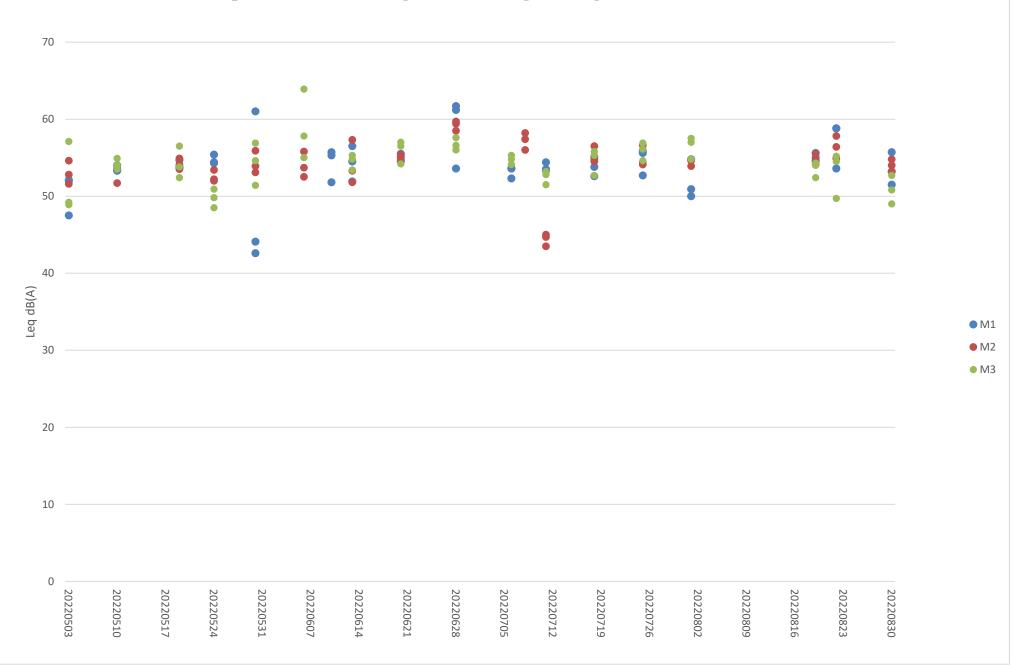

## Additional Impact Noise Monitoring Results during Evening Time (1900 - 2300 hours)

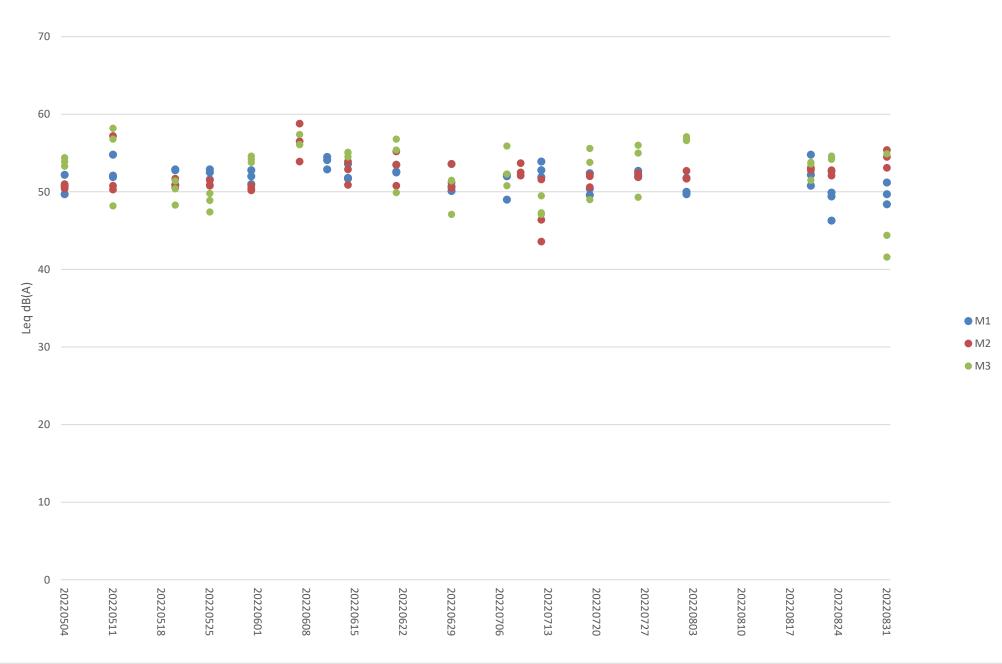

## Additional Impact Noise Monitoring Results during Night Time (2300 - 0700 hours)

Appendix K Waste Flow Table



Monthly Summary Waste Flow Table for

<u>2018 (year)</u>

Project : Integrated Waste Management Facilities, Phase 1

Contract No.:	EP/SP/66/12

		Actual	Quantities of	Inert C&D	Materials Gei	nerated Mon	Actual Quantities of C&D Wastes Generated Monthly							
Month	Total Quantity Generated	Hard Rock and Large Broken Concrete (see Note 1)	Reused in the Contract	Reused in other Projects	Disposed as Public Fill (see Note 4)	Imported Fill Sand (see Note 4)	Imported Fill Public fill (see Note 4)	Imported Fill Rock (see Note 4)	Metals	Paper/ cardboard packaging	Plastics (see Note 2)	Chemica	l Waste	Others, e.g. general refuse (see Note 3)
	(in ,000m <sup>3</sup> )	(in ,000m <sup>3</sup> )	(in ,000m <sup>3</sup> )	(in ,000m <sup>3</sup>	(in ,000m <sup>3</sup> )	(i	$(n,000m^3)$	<b>-</b>	(in ,000 kg)	(in ,000kg)	(in ,000kg)	(in ,000kg)	(in ,000L)	$(in,000 \text{ m}^3)$
Jan	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Feb	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Mar	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Apr	0	0	0	0	0	0	0	0	0	0	0	0	0	0
May	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Jun	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Sub-total	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Jul	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Aug	0	0	0	0	0	0	0	0	0	0	0	0	0	0.0065
Sep	0	0	0	0	0	2.9619	0	0	0	0	0	0	0	0
Oct	0	0	0	0	0	3.0771	0	0	0	0	0	0	0	0.0130
Nov	0	0	0	0	0	6.7871	0	0	0	0	0	0	0	0
Dec	0	0	0	0	0	59.0709	0	0	0	0	0	0.2000	0.8700	0
Total	0	0	0	0	0	71.8970	0	0	0	0	0	0.2000	0.8700	0.0195

Notes:

(1) Broken concrete for recycling into aggregates.

(2) Plastics refer to plastic bottles/ containers, plastic sheets/ foam from packaging materials.

(3) Use the conversion factor : 1 full load of dumping truck being equivalent to  $6.5m^3$  by volume.

(4) Use the conversion factor: sand density =  $1.6T/m^3$ , public fill density =  $1.8T/m^3$  and rock density =  $2T/m^3$ 



Monthly Summary Waste Flow Table for \_\_\_\_\_

<u>2019 (year)</u>

Project : Integrated Waste Management Facilities, Phase 1 Contract No.: EP/SP/66/12 Actual Quantities of Inert C&D Materials Generated Monthly Actual Quantities of C&D Wastes Generated Monthly Imported Imported Imported Hard Rock Fill Fill Fill and Large Reused in Disposed as Others, e.g. general Total Reused in Paper/ Month Broken Public Rock Plastics Sand refuse Public Fill cardboard **Chemical Waste** the other Metals Quantity (see Note 2) Concrete fill (see Note (see Note packaging Generated Contract Projects (see Note 4) (see Note 3) (see Note (see Note 4) 4) 1) 4)  $(in,000m^3)$   $(in,000m^3)$   $(in,000m^3)$   $(in,000m^3)$  $(in,000m^3)$  $(in, 000m^3)$ (in ,000kg) (in ,000kg) (in ,000 kg) (in ,000kg) (in ,000L)  $(in, 000 \text{ m}^3)$ 0 0 0 0 0 82.6139 0 0 0 0 0 0 0 0.0065 Jan 46.7821 Feb 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 97.1000 0 0.7552 0 0.2560 0 0 0 0 Mar 0 0 0 0 0 0 0 0 0 0 58.0413 0 0 0 Apr 0 0 0 0 0 14.5625 0 1.4648 0 0 0 0 0 0.0065 May 0 0 0 0 0 0 0 6.8421 0 0 0 0 0 0 Jun 0 0 0 Sub-total 0 0 0 0 299.0998 0 9.0621 0 0.2560 0 0.0130 0 0 0 0 0 0 0 0 0 0 0.4289 0 8.4000 0.0130 Jul 0 0 0 0 0 2.5775 0 10.5600 0 0 0 0 0 0 Aug 6.1081 Sep 0 0 0 0 0 0 8.4704 0 0.3530 0 0 0 0.0065 0 0 0 0 0 9.8875 0 7.1900 0 0 0 0 0 0 Oct 0 0 0 0 0 0 0 Nov 38.3088 0 19.3105 0 0 0 0.0195 0 0 0 0 0 Dec 0 0 0 54.3469 26.9807 0 0 0 0.0910 0 0 0 0 0 410.3286 0 82.0026 0 0.6090 0 0 8.4000 Total 0.1430

Notes:

(1) Broken concrete for recycling into aggregates.

(2) Plastics refer to plastic bottles/ containers, plastic sheets/ foam from packaging materials.

(3) Use the conversion factor : 1 full load of dumping truck being equivalent to  $6.5m^3$  by volume.

(4) Use the conversion factor: sand density =  $1.6T/m^3$ , public fill density =  $1.8T/m^3$  and rock density =  $2T/m^3$ 



Monthly Summary Waste Flow Table for

2020 (year)

Project : I	ntegrated W	aste Manag	gement Faci	lities, Phas	se 1		Contract No.: EP/SP/66/12								
		Actual (	Quantities of	Inert C&D	Materials Ger	nerated Mon	thly		Actual Quantities of C&D Wastes Generated Monthly						
Month	Total Quantity Generated	Hard Rock and Large Broken Concrete (see Note 1)	Reused in the Contract	Reused in other Projects	Disposed as Public Fill (see Note 4)	Imported Fill Sand (see Note 4)	Imported Fill Public fill (see Note 4)	Imported Fill Rock (see Note 4)	Metals	Paper/ cardboard packaging	Plastics (see Note 2)	Chemica	l Waste	Others, e.g. general refuse (see Note 3)	
	(in ,000m <sup>3</sup> )	(in ,000m <sup>3</sup> )	(in ,000m <sup>3</sup> )	(in ,000m <sup>3</sup>	(in ,000m <sup>3</sup> )	(	in ,000m <sup>3</sup> )		(in ,000 kg)	(in ,000kg)	(in ,000kg)	(in ,000kg)	(in ,000L)	(in ,000 m <sup>3</sup> )	
Jan	0	0	0	0	0	37.1550	0	25.0812	0	0	0	0	0	0.0065	
Feb	0	0	0	0	0	27.7910	0	18.8300	0	0	0	0	0	0.0065	
Mar	0	0	0	0	0	22.5669	0	26.1586	0	0	0	0	7.2000	0.0065	
Apr	0	0	0	0	0	12.7800	0	10.1825	0	0	0	0	0	0.0195	
May	0	0	0	0	0	16.1138	0	24.3740	0	0.4220	0	0	0	0.0195	
Jun	0	0	0	0	0	31.5177	0	28.3030	0	0	0	0	0	0.0065	
Sub-total	0	0	0	0	0	147.9244	0	132.9293	0	0.4220	0	0	7.2000	0.0650	
Jul	0	0	0	0	0	34.7856	17.0606	35.1800	0	0	0	0	0	0.0195	
Aug	0	0	0	0	0	27.1375	65.5667	27.9335	0	0	0	0	0	0	
Sep	0	0	0	0	0	11.9813	110.1328	43.5435	0	0	0	0	0	0.0195	
Oct	0	0	0	0	0	2.8213	131.6600	22.5415	0	0	0	0	0	0.0130	
Nov	0	0	0	0	0	0	162.1811	44.6475	0	0.4090	0	0	0.4000	0.0130	
Dec	0	0	0	0	0	0	174.9800	57.8380	0	0	0	0	0	0.0130	
Total	0	0	0	0	0	224.6501	661.5812	364.6133	0	0.8310	0	0	7.6000	0.1430	

Notes:

(1) Broken concrete for recycling into aggregates.

Plastics refer to plastic bottles/ containers, plastic sheets/ foam from packaging materials. (2)

Use the conversion factor : 1 full load of dumping truck being equivalent to  $6.5m^3$  by volume. (3)

Use the conversion factor: sand density =  $1.6T/m^3$ , public fill density =  $1.8T/m^3$  and rock density =  $2T/m^3$ (4)



Monthly Summary Waste Flow Table for \_\_\_\_\_

2021 (year)

Project : Integrated Waste Management Facilities, Phase 1 Contract No.: EP/SP/66/12 Actual Quantities of Inert C&D Materials Generated Monthly Actual Quantities of C&D Wastes Generated Monthly Hard Rock Imported Imported Imported and Large Fill Fill Fill Reused in Disposed as Others, e.g. general Total Reused in Paper/ Month Broken Plastics Public fill Sand Rock Public Fill cardboard refuse Metals Chemical Waste Quantity the other Concrete (see Note 2) (see Note (see Note (see Note packaging Generated Contract Projects (see Note 4) (see Note 3) (see Note 4) 4) 4) 1)  $(in,000m^3)$   $(in,000m^3)$   $(in,000m^3)$   $(in,000m^3)$   $(in,000m^3)$  $(in,000m^3)$ (in ,000 kg) (in ,000kg) (in ,000kg) (in ,000kg)  $(in,000 \text{ m}^3)$ (in .000L) 0 0 0 0 0 0 198.1311 0 0 0 0 0 36.4775 0.0065 Jan 0 0 0 0 0 0 143.9511 0 0 0 0 0 Feb 20.9960 0.6305 0 0 0 0 0 0 103.1833 23.4510 0 0 0 0 0 0.0130 Mar 0 0 0 0 0 0 161.2956 0 Apr 27.2810 0 0 0 0 0.0130 0 0 0 0 0 0 0 0 0 193.3300 0 0 0.0715 May 20.5265 0 0 0 0 0 23.7825 0 0 0 0 141.5728 0 0.2440 0.0455 Jun 0 0 0 0 0 0 941.4639 152.5145 0 0.2440 0 0 0 0.7800 Sub-total 0 0 0 0 0 0 105.1083 30.6065 0 0 0 0 0 0.0195 Jul 0 0 0 0 0 0 0 0 11.1822 7.5180 0 0 0 0.0130 Aug 0 0 0 Sep 0 0 0 0 5.7575 0 0 0 0 0.6000 0.0390 0 0 0 0 0 0 0 0 0 0 0 0 0 6.8885 Oct 0 0 0 0 0 0 0 0 6.2975 0 0.1610 0 0 0.0130 Nov Dec 0 0 0 0 0 0 0 5.9235 0 0 0 0 0 0 0 0 0 0 0 Total 0 0 1057.7544 215.5060 0 0.4050 0 0.6000 0.8645

(1) Broken concrete for recycling into aggregates.

Notes:

(2) Plastics refer to plastic bottles/ containers, plastic sheets/ foam from packaging materials.

(3) Use the conversion factor : 1 full load of dumping truck being equivalent to  $6.5m^3$  by volume.

(4) Use the conversion factor: sand density =  $1.6T/m^3$ , public fill density =  $1.8T/m^3$  and rock density =  $2T/m^3$ .



Project : Integrated Waste Management Facilities. Phase 1

吉寶西格斯 - 振華聯營公司 Keppel Seghers - Zhen Hua Joint Venture

Monthly Summary Waste Flow Table for

<u>2022 (year)</u>

Contract No.: EP/SP/66/12

Floject . II	Toject : integrated waste Management Facilities, Phase 1										Contract No.: EP/SP/00/12					
		Actual	Quantities of	of Inert C&E	Materials Ge	enerated Mo	nthly			Actual	Quantities of	C&D Wastes	Generated M	onthly		
Month	Total Quantity Generated	Hard Rock and Large Broken Concrete (see Note 1)	Reused in the Contract	Reused in other Projects (see Note 4)	Disposed as Public Fill (see Note 4)	Imported Fill Sand (see Note 4)	Imported Fill Public fill (see Note 4)	Imported Fill Rock (see Note 4)	Metals	Paper/ cardboard packaging	Plastics (see Note 2)	Chemica	l Waste	Others, e.g. general refuse (see Note 3)		
	(in ,000m <sup>3</sup> )	(in ,000m <sup>3</sup> )	(in ,000m <sup>3</sup> )	(in ,000m <sup>3</sup>	(in ,000m <sup>3</sup> )		$(in,000m^3)$	T	(in ,000 kg)	(in ,000kg)	(in ,000kg)	(in ,000kg)	(in ,000L)	(in ,000 m <sup>3</sup> )		
Jan	0	0	0	0	0	0	4.9389	2.7070	0	0.1550	0	0	0	0.0715		
Feb	0	0	0	0	0	0	3.2478	4.0290	0	0	0	0.4000	0.2250	0		
Mar	0	0	0	0	0	0	2.3422	2.7820	0	0	0	0	0	0.0780		
Apr	0	0	0	0	0	0	18.2189	5.8100	0	0.3120	0	0	0	0.1495		
May	0.0648	0	0	0	0.0648	0	16.7711	17.2320	0	0	0	0	0	0.0975		
Jun	0.0037	0	0	0	0.0037	0.2115	1.1128	14.1470	36.3000	0.3890	0	0	1.7250	0.0975		
Sub-total	0.0685	0	0	0	0.0685	0.2115	46.6317	46.7070	36.3000	0.8560	0	0.4000	1.9500	0.4940		
Jul	25.7183	0	0	25.7183	0	0.1125	0.8333	17.5210	0	0.6400	0.0060	0	0	0.1235		
Aug	13.2494	0	0	13.2494	0	0	0	24.5210	76.0300	1.8870	0	0	0	0.1170		
Sep																
Oct																
Nov																
Dec																
Total	39.0362	0	0	38.9677	0.0685	0.3240	47.4650	88.7490	112.3300	3.3830	0.0060	0.4000	1.9500	0.7345		

(1) Broken concrete for recycling into aggregates.

Notes:

(2) Plastics refer to plastic bottles/ containers, plastic sheets/ foam from packaging materials.

(3) Use the conversion factor : 1 full load of dumping truck being equivalent to  $6.5m^3$  by volume.

(4) Use the conversion factor: sand density =  $1.6T/m^3$ , public fill density =  $1.8T/m^3$  and rock density =  $2T/m^3$ .

# Appendix L Event / Action Plan for Coral Monitoring

Contract No. EP/SP/66/12 Integrated Waste Management Facilities, Phase 1

Keppel Seghers – Zhen Hua Joint Venture

Event		Actio	n	
_	ET Leader II	EC S	o c	ontractor
Exceedance	2. Inform the IEC, SO ,and	Discuss monitoring with the 1. ET and the Contractor; Review proposals for additional monitoring and any other measures submitted by the Contractor 2. and advise the SO accordingly.	Discuss with the IEC 1. additional monitoring requirements and any other measures proposed by the 2. ET; Make the agreement on the measures to be 3. implemented.	notification of the non-compliance in writing; Discuss with the ET and the IEC and propose measures to the IEC and the SO;
Limit Level <sup>1</sup> Exceedance	<ol> <li>Undertake Steps 1-4 as in 1. the Action Level Exceedance. If further 2. exceedance of Limit Level, propose enhancement measures for consideration.</li> </ol>	Discuss monitoring with the 1. ET and the Contractor; Review proposals for additional monitoring and any other measures submitted by the Contractor 2. and advise the SO accordingly.	Discuss with the IEC 1. additional monitoring requirements and any other measures proposed by the 2. ET; Make the agreement on the measures to be 3. implemented.	notification of the non-compliance in writing; Discuss with the ET and the IEC and propose measures to the IEC and the SO;

Appendix M Event / Action Plan for White-Bellied Sea Eagle

Event		Action	
	Environmental	Audit Team	Contractor
	Team		
Absence of White-bellied Sea Eagle during a whole day of monitoring.	Inform audit team. Increase monitoring frequency to daily.	<ul> <li>Inform site engineer and contractor.</li> <li>If the absence remains: <ul> <li>Review construction activities and noise monitoring records of the associated period;</li> <li>Identify potential causes of the absence;</li> <li>Propose remedial measures, such as change of construction method and sequence;</li> <li>Confirm the feasibility of the proposed remedial measures with site engineer and contractor;</li> <li>Discuss with environmental team about the effectiveness of the proposed remedial measures.</li> </ul> </li> </ul>	Implement the agreed remedial measures.

Appendix N Exceedance Report

Integrated Waste Management Facilities, Phase 1

Water Quality (Regular Monitoring)				
Location	Action Level	Limit Level	Total	
B1	0	0	0	
B2	1	0	1	
В3	0	1	1	
B4	0	1	1	
CR1	0	0	0	
CR2	0	1	1	
F1A	0	0	0	
H1	0	0	0	
<b>S</b> 1	Not applicable			
S2A	Not applicable			
<b>S</b> 3	Not applicable			
M1	0	0	0	

## Statistical Summary of Exceedances in the Reporting Period

#### Integrated Waste Management Facilities, Phase 1

	Noise (Day Time)				
Location	Action Level	Limit Level	Total		
M1	0	0	0		
M2	0	0	0		
M3	0	0	0		
	Noise (Ev	ening Time)	·		
Location	Action Level	Limit Level	Total		
M1	0	0	0		
M2	0	0	0		
M3	0	0	0		
	Noise (N	ight Time)	·		
Location	Action Level	Limit Level	Total		
M1	0	0	0		
M2	0	0	0		
M3	0	0	0		

#### Incident Report on Action Level or Limit Level Non-compliance

Project	Integrated Waste Managemen	nt Facilities. Phase 1	
Date	08 August 2022 (Lab result received on 16 August 2022)		
Time	14:45 – 18:15 (Mid-Flood)		
	Mid-Fl	lood	
Monitoring Location	B2, B3, B4 + B1• S1 • C1A	PROPOSED OUTFAIL SZA 4 PROPOSED 132W 5 CA 4 PROPOSED 132W 5 CA 5 CA 5 CA 5 CA 5 CA 6 CA 5 CA 5 CA 5 CA 6 CA 5 C	FIA FIA PFIA PFIA PFIA PFIA N N N N N N N N N N N N N
D			
Parameter	Suspended Solid (SS)	<b>.</b>	
Action & Limit Levels	Action Level	Limit Level	
Measurement Level	$\geq$ 12.0 mg/L	$\geq 14.0 \text{ mg/l}$	
Measurement Level	Impact Station(s) of Exceedance	Control Stations	Impact Station(s) without Exceedance
		2.9  mg/(C1A)	
	12.8  mg/L (B2)	3.8  mg/L (C1A)	10.5  mg/L (B1)
	15.8  mg/L (B3)	2.9 mg/L (C2A)	3.3  mg/L (F1A)
	14.8 mg/L (B4)		8.3  mg/L (H1)
			9.0 mg/L (M1)
			6.0  mg/L (CR1)
			5.5 mg/L (CR2)
Possible reason for Action or Limit Level Non-compliance	<ul> <li>Works scheduled on site on 08 Aug 2022 include infilling of caisson, performing weighing test on 1.85T armour rock, laying 1.85T armour rock at Caisson 58 - 60, landfilling works for below +6.00mPD, landfilling works for above +6.00mPD, installation of instrumentation, piling pre-drilling works, piling works, piling works for driven pile, piling works for pre-bored socketed H-pile, piling works for bored pile, pile cap construction, blockwork seawall and existing caisson extension.</li> <li>Dominant sea current direction was found to be from Southeast to Northwest at waters around Shek Kwu Chau.</li> <li>An exceedance of action level was found at B2, exceedances of limit level were found at B3 and B4.</li> </ul>		


B2, B3 and B4 are located at unrelated stream direction (neither upstream nor downstream, far away) to the works location. Exceedances are deemed to be unrelated to the Project.


The installation of caisson No.19 was completed on 18 Mar 2021, the reclamation area was enclosed.

According to the field observation by sampling team during sampling event, no silt plume was observed in the Project site and the weather was cloudy during the sampling event.


No major observation of improper site practices that contributed to the increase of the suspended solids was recorded during the weekly inspection on 09 August 2022.


After the investigation, the exceedances on 08 August 2022 at B2, B3 and B4 are deemed to be unrelated to the Project.

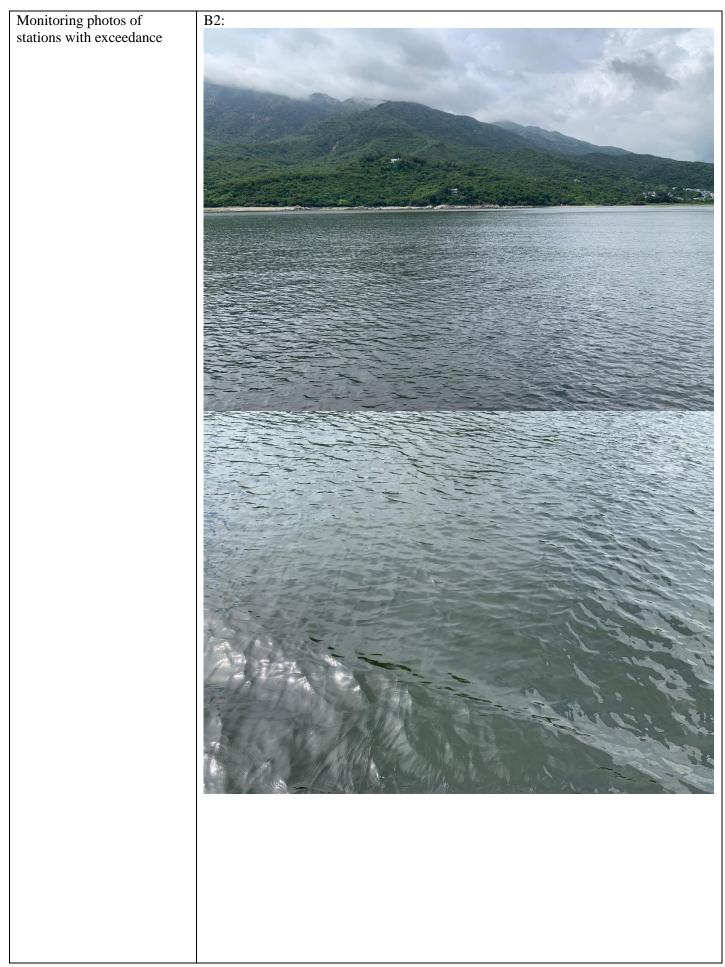

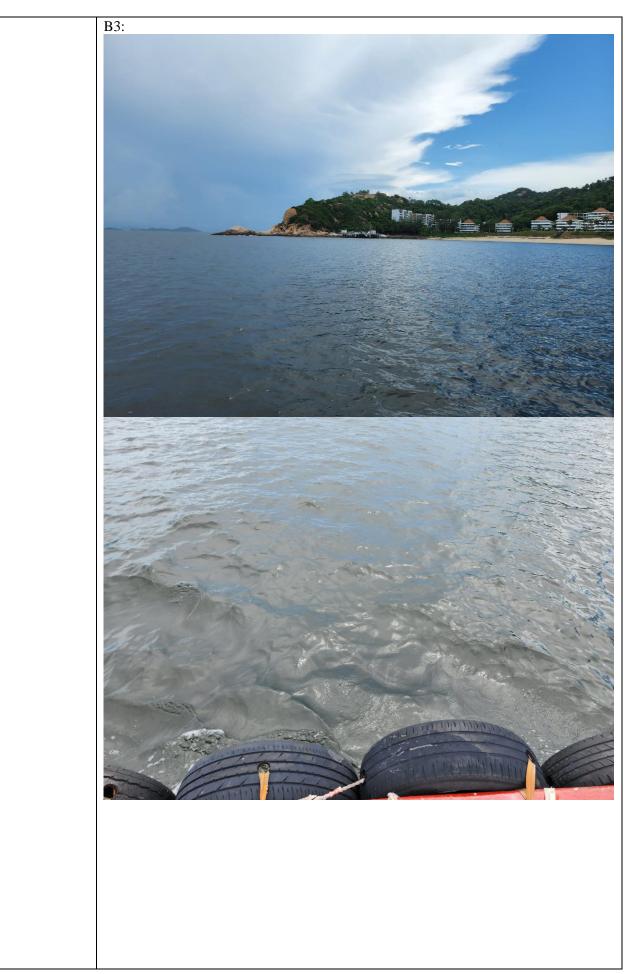

#### Contract No. EP/SP/66/12 Integrated Waste Management Facilities, Phase 1

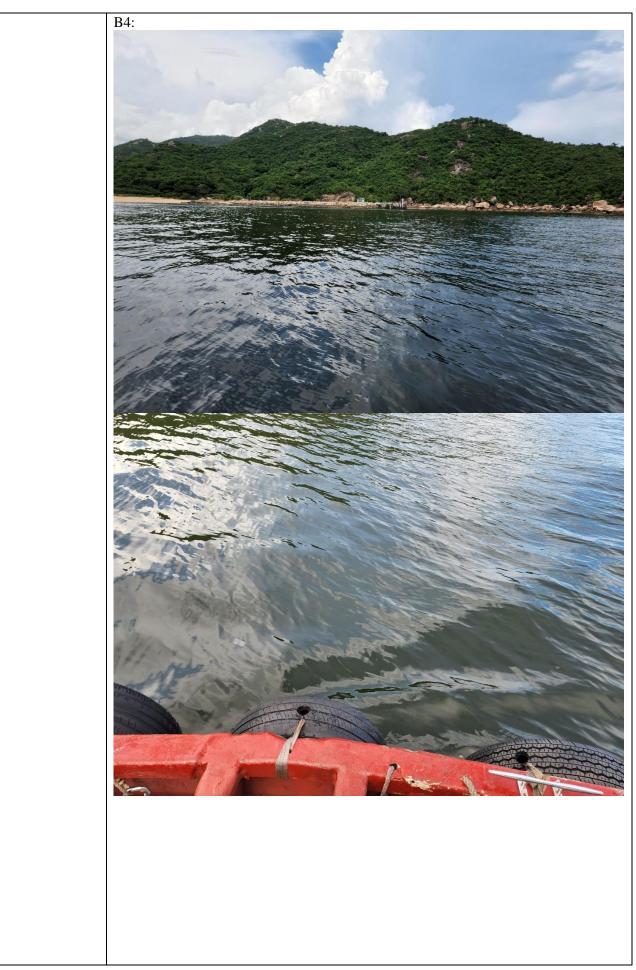


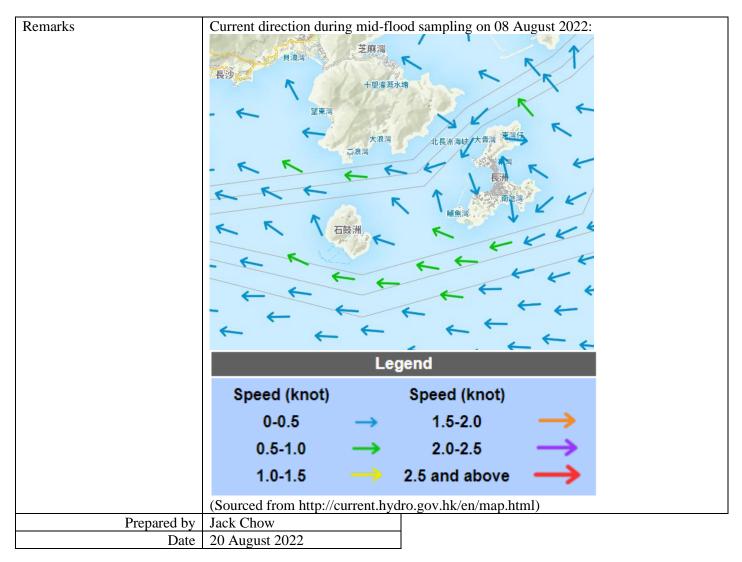


### Interim Incident Report on Action Level or Limit Level Non-compliance

Project	Integrated Waste Managemer	nt Facilities Phase 1	
Date	16 August 2022 (Lab result received on 23 August 2022)		
Time	12:04 – 18:27 (Mid-Ebb)		
Time	Mid-E	ìbh	
Monitoring Location	CR2 + B1 S1	B2 PROPOSED OUTFALL +	F1A N F1A N B4 C2A Key A PROPOSED 132KV SUBMARINE CABLE C MONITORING STATION PROPOSED 01TFALL PROPOSED 01TFALL THE IWMF SITE BOUNDARY
Parameter	Suspended Solid (SS)		LAND FORMATION FOOTPRINT
Action & Limit Levels	Action Level	Limit Level	
	$\geq$ 12.0 mg/L	$\geq$ 14.0 mg/L	
Measurement Level	Impact Station(s) of Exceedance 17.8 mg/L (CR2)	Control Stations 4.3 mg/L (C1A) 5.4 mg/L (C2A)	Impact Station(s) without           Exceedance           4.8 mg/L (B1)           5.0 mg/L (B2)           5.0 mg/L (B3)           4.3 mg/L (B4)           8.8 mg/L (F1A)           4.5 mg/L (H1)           11.3 mg/L (M1)           9.0 mg/L (CR1)
Possible reason for Action or Limit Level Non-compliance	<ul> <li>Works scheduled on site on 16 Aug 2022 include infilling of caisson, infilling of 1.85T armour at Caisson 57 - 60, infilling of G200 Rock fill at Caisson 62 - 63, installation of Stoppers at Breakwater A CH670 - CH720, installation of Stopper, landfilling works for below +6.00mPD, landfilling works for above +6.00mPD, installation of instrumentation, piling pre-drilling works, piling works, piling works for driven pile, piling works for pre-bored socketed H-pile, piling works for bored pile, pile cap construction, blockwork seawall and existing caisson extension.</li> <li>Dominant sea current direction was found to be from Northeast to Southwest at waters around Shek Kwu Chau.</li> <li>An exceedance of SS limit level was found at CR2.</li> </ul>		

CR2 is located close to the works location within the Project site while no marine work was conducted on 16 Aug 2022.
The installation of caisson No.19 was completed on 18 Mar 2021, the reclamation area was enclosed.
According to the field observation by sampling team during sampling event, no silt plume was observed in the Project site and the weather was sunny during the sampling event.
No major observation of improper site practices that contributed to the increase of the suspended solids was recorded during the weekly inspection on 23 Aug 2022.
After the investigation, the exceedance on 16 Aug 2022 at CR2 is deemed to be unrelated to the Project.

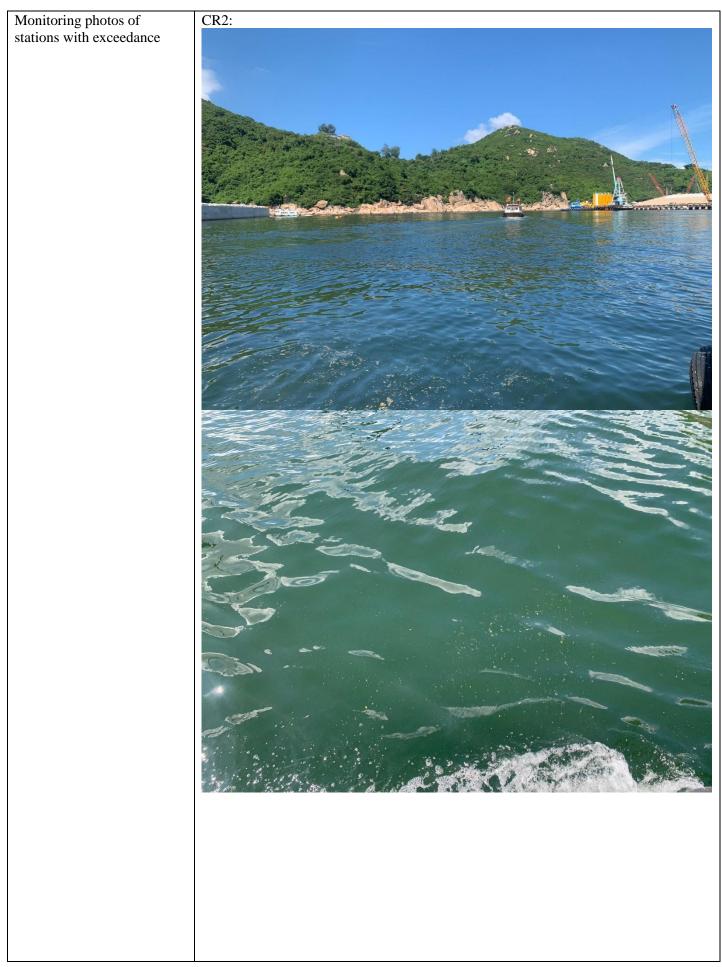

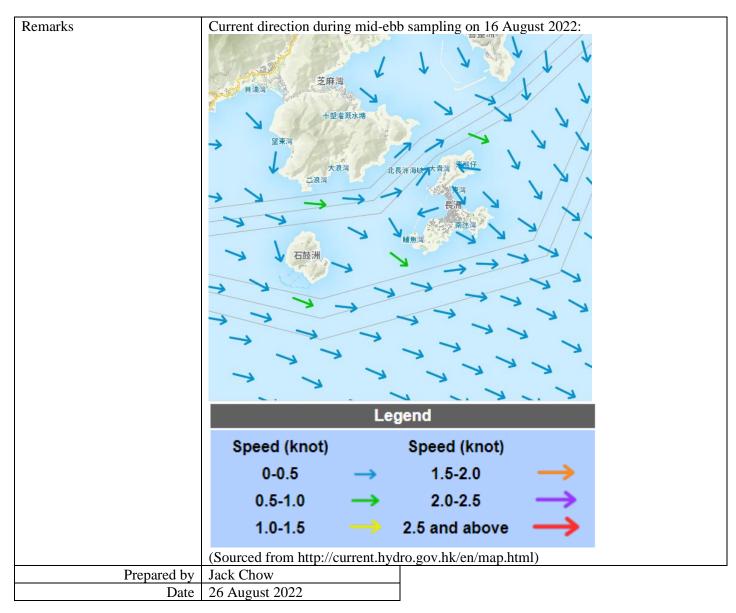

Appendix O Complaint Log

Integrated Waste Management Facilities, Phase 1

### Statistical Summary of Environmental Complaints

Reporting	E	Environmental Complaint Sta	tatistics	
Period	Frequency	Cumulative	Complaint Nature	
01 Aug 2022- 31 Aug 2022	0	1	N/A	

#### Statistical Summary of Environmental Summons

Reporting	]	Environmental Summons Sta	tistics
Period	Frequency	Cumulative	Details
01 Aug 2022-	0	0	N/A
31 Aug 2022	0	0	IN/A

#### Statistical Summary of Environmental Prosecution

Reporting	E	<b>Environmental Prosecution Statistics</b>		
Period	Frequency	Cumulative	Details	
01 Aug 2022-	0	0	N/A	
31 Aug 2022	0	0	N/A	

## Appendix P Impact Monitoring Schedule of Next Reporting Month

			Impact Monitoring Schedule for IWMF Sep-22		
-	Mon			<b>TL</b>	<b>F</b> -1
n	Mon	Tue	Wed	Thu	Fri
				1	2
					Water Quality monitoring for B1, B2
					Tid
					Ebb Tide
					Flood Tid
					Moni
					Mid-ebb
					Mid-floo
	5	6	7	8	9
	Impact	Impact	Impact		
	Water Quality monitoring for B1, B2, B3, B4, H1, C1A, C2A, F1A, CR1, CR2, M1	Night time Noise monitoring for M1, M2 & M3	Water Quality monitoring for B1, B2, B3, B4, H1, C1A, C2A, F1A, CR1, CR2, M1		Water Quality monitoring for B1, B2
	Tidal Period:		Tidal Period:		Tid
	Ebb Tide: 03:04 - 12:00		Ebb Tide: 06:00 - 14:00		Ebb Tide Flood Tid
	Flood Tide: 12:00 - 23:59		Flood Tide: 14:00 - 21:18		Monit
	Monitoring Time: *Mid-ebb: 08:00 - 11:30		Monitoring Time: Mid-ebb: 08:15 - 11:45		Mid-ebb
	&Mid-flood: 16:14 - 19:00		&Mid-flood: 15:54 - 19:00		&Mid-floo
	Daytime & Evening Noise monitoring for M1, M2 & M3				
11	12	13	14	15	16
	Impact	Impact	Impact		
	Water Quality monitoring for B1, B2, B3, B4, H1, C1A, C2A, F1A, CR1, CR2, M1		Water Quality monitoring for B1, B2, B3, B4, H1, C1A, C2A, F1A, CR1, CR2, M1		Water Quality monitoring for B1, B2
	Tidal Period:	Ecology monitoring for Marine Mammals by Vessel-based Line-Transect Survey	Tidal Period:		Tida
	Ebb Tide: 10:24 - 16:44		Ebb Tide: 05:14 - 13:41		Ebb Tide
	Flood Tide: 04:00 - 10:24		Flood Tide: 13:41 - 22:00		Flood Tid
	Monitoring Time:		Monitoring Time:		Moni
	Mid-ebb: 11:49 - 15:19		*Mid-ebb: 08:00 - 11:12		Mid-ebb
	*#\$Mid-flood: 08:00 - 10:04		&Mid-flood: 16:05 - 19:00		Mid-floor
			Night time Noise monitoring for M1, M2 & M3		
.8				22	23
	Impact Water Quality monitoring for B1, B2, B3, B4, H1, C1A, C2A, F1A, CR1, CR2, M1	Impact Night time Noise monitoring for M1, M2 & M3	Impact Water Quality monitoring for B1, B2, B3, B4, H1, C1A, C2A, F1A, CR1, CR2, M1		I Water Quality monitoring for B1, B2
	Tidal Period:	Night time Noise monitoring for M1, M2 & M3	Tidal Period:		Tid
	Ebb Tide: 02:52 - 12:00		Ebb Tide: 06:47 - 14:49		Ebb Tide
	Flood Tide: 12:00 - 23:59		Flood Tide: 14:49 - 22:00		Flood Tide
	Monitoring Time:		Monitoring Time:		Monit
	*Mid-ebb: 08:00 - 11:30		Mid-ebb: 09:03 - 12:33		Mid-ebb
	&Mid-flood: 16:14 - 19:00		&Mid-flood: 15:30 - 19:00		#Mid-floo
	Daytime & Evening Noise monitoring for M1, M2 & M3				
25	26	27	28	29	30
	Impact	Impact	Impact	Impact	
	Water Quality monitoring for B1, B2, B3, B4, H1, C1A, C2A, F1A, CR1, CR2, M1	Night time Noise monitoring for M1, M2 & M3	Water Quality monitoring for B1, B2, B3, B4, H1, C1A, C2A, F1A, CR1, CR2, M1	Ecology monitoring for WBSE	Water Quality monitoring for B1, B2
	Tidal Period:		Tidal Period:	15th Quarterly Coral Monitoring at Indirect Impact Site and Control Site	Tid
	Ebb Tide: 09:28 - 15:51		Ebb Tide: 11:03 - 16:42		Ebb Tide
	Flood Tide: 15:51 - 22:00		Flood Tide: 04:26 - 11:03		Flood Tid
	Monitoring Time:		Monitoring Time:		Moni
	Mid-ebb: 10:54 - 14:24		Mid-ebb: 12:07 - 15:37		Mid-ebb
	#\$&Mid-flood: 16:09 - 19:00		*#Mid-flood: 08:00 - 10:43		*Mid-floo
	Daytime & Evening Noise monitoring for M1, M2 & M3				
	· · · · · · · · · · · · · · · · · · ·				

Remarks: 1. Daytime Noise Monitoring (07:00-1900), Evening Time Noise Monitoring (1900-2300), Night Time Noise Monitoring (2300-0700) 2. Water Quality Monitoring for \$1,\$2 and \$3 will only conduct during DCM works, refer to Detailed DCM Plan

Note: - as per Marine Department Notice No 107 of 2018, all vessels employed for the works should stay in the works area outside the hours of works (0700 to 2300). Due to safty concern, Water Quality Monitoring would start at 0800. # - Prioritized routing: Mid-Ebb: C1->53->C82->C1->H1->Bernaining stations and Mid-Flood: C2->CR1->S3->CR2->H1->Remaining stations 5 - Since predicted tide is shorter than 3.5 hours, method of 90% tidal period as monitoring time is approached. 8 - Due to safety concern for sampling event in might-time, method of 90% tidal period as monitoring time is approached and end at 1900.

	Sat
	3
Impact B2, B3, B4, H1, C1A, C2A, F1A, CR1, CR2, M1 Tidal Period: ide: 14:00 - 18:47	
Tide: 06:56 - 14:00 onitoring Time: 2bb: 14:38 - 18:08 ood: 08:43 - 12:13	
	10
Impact B2, B3, B4, H1, C1A, C2A, F1A, CR1, CR2, M1 Tidal Period: ide: 07:46 - 15:10 Tide: 15:10 - 22:10 onitoring Time: ebb: 09:43 - 13:13 lood: 15:31 - 19:00	
	17
Impact , B2, B3, B4, H1, C1A, C2A, F1A, CR1, CR2, M1 Tidal Period: Tide: 10:01 18:00 Tide: 07:11 - 14:00 onitoring Time:	
ood: 08:50 - 12:20	
Impact B2, B3, B4, H1, C1A, C2A, F1A, CR1, CR2, M1 Tidal Period: ide: (07:07 - 14:41 Tide: 14:41 - 21:23 onitoring Time: bb: 09:09 - 12:39	24
lood: 15:01 - 18:31	
Impact B2, B3, B4, H1, C1A, C2A, F1A, CR1, CR2, M1 Tidal Period: īde: 13:00 - 17:32	
Tide: 06:00 - 13:00 onitoring Time: ebb: 13:31 - 17:01 iood: 08:00 - 11:15	