



South East New Territories (SENT) Landfill Extension

Quarterly Environmental Monitoring & Audit Report No.5

April 2020

ERM

2507, 25/F One Harbourfront 18 Tak Fung Street Hunghom, Kowloon Hong Kong T: 2271 3000 F: 2723 5660 www.erm.com





South East New Territories (SENT) Landfill Extension

Environmental Certification Sheet EP-308/2008/B and FEP-01/308/2008/B

Reference Document/Plan

Document/Plan to be Certified/Verified:

Quarterly Environmental Monitoring & Audit Report No.5 for South East New Territories (SENT) Landfill Extension

Date of Report:

21 April 2020

Reference EM&A Manual Requirement

EM&A Manual:

Section 11.4

The quarterly EM&A summary report shall be prepared by the ET, certified by the ET Leader and verified by the IEC. The quarterly EM&A summary report should contain all information listed under Section 11.4 of the approved EM&A Manual.

ET Certification

I hereby certify that the above referenced document/plan complies with the above referenced EM&A Manual requirement.

Warchitt.

Frank Wan,

Environmental Team Leader:

(ERM Hong-Kong, Limited)

Date:

21 April 2020

IEC Verification

I hereby verify that the above referenced document/plan complies with the above referenced EM&A Manual requirement.

W.K. Chiu,

Independent Environmental Checker:

(Meinhardt Infrastructure and

Environment Limited)

Date:

4 May 20 20

South East New Territories (SENT) Landfill Extension

Quarterly Environmental Monitoring & Audit Report No.5

Environmental Resources Management

2507, 25/F, One Harbourfront 18 Tak Fung Street Hunghom, Kowloon Hong Kong

Telephone: (852) 2271 3000 Facsimile: (852) 2723 5660 E-mail: post.hk@erm.com http://www.erm.com

Client:		Projec	ct No:		
Green Valley Landfill Ltd.			169		
Summary:		Date:			
			pril 2020		
		Appro	ved by:		
This document presents the Quarterly EM&A Report No.5 for South East New Territories (SENT) Landfill Extension			Janda A J		
		Frank Wan			
		Partner			
0	Quarterly EM&A Report No.5	AL	FW	FW	21 Apr 20
Revision	Description	Ву	Checked	Approved	Date
of 'ERM Hor	has been prepared by Environmental Resources Management the trading name ng-Kong, Limited', with all reasonable skill, care and diligence within the terms	Distribution			
of the Contract with the client, incorporating our General Terms and Conditions of Business and taking account of the resources devoted to it by agreement with the client.			Internal		DHSAS 18001:2007 ificate No. OHS 515956
We disclaim any responsibility to the client and others in respect of any matters outside the scope of the above.		\boxtimes	Public		BSI
to third parti	s confidential to the client and we accept no responsibility of whatsoever nature es to whom this report, or any part thereof, is made known. Any such party report at their own risk.		Confide		ISO 9001 : 2008 tificate No. FS 32515



CONTENTS

EXECUT	TIVE SUMMARY	1
1	INTRODUCTION	1
1.1	BACKGROUND	1
1.2	PROJECT DESCRIPTION	1
1.3	SCOPE OF THE EM&A REPORT	2 2
1.4	PROJECT ORGANISATION	
1.5	SUMMARY OF CONSTRUCTION WORKS	3
1.6	SUMMARY OF EM&A PROGRAMME REQUIREMENTS	6
1.7	STATUS OF STATUTORY ENVIRONMENTAL COMPLIANCE WITH THE	
	ENVIRONMENTAL PERMIT	7
1.8	STATUS OF OTHER STATUTORY ENVIRONMENTAL REQUIREMENTS	8
2	EM&A RESULTS	9
2.1	AIR QUALITY MONITORING	9
2.2	NOISE MONITORING	11
2.3	SURFACE WATER QUALITY MONITORING	12
2.4	LANDSCAPE AND VISUAL MONITORING	15
2.5	EM&A SITE INSPECTION	15
2.6	Waste Management Status	19
2.7	IMPLEMENTATION STATUS OF ENVIRONMENTAL MITIGATION MEASURES	20
2.8	SUMMARY OF EXCEEDANCES OF THE ENVIRONMENTAL QUALITY PERFORMA	NCE
	LIMIT	20
2.9	SUMMARY OF COMPLAINTS, NOTIFICATION OF SUMMONS AND SUCCESSFUL	
	PROSECUTIONS	20
3	CONCLUSION AND RECOMMENDATION	21

ANNEXES

- ANNEX A WORK PROGRAMME
- ANNEX B ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE
- ANNEX C MONITORING SCHEDULE FOR THIS REPORTING PERIOD
- ANNEX D AIR QUALITY
- ANNEX D1 24-HOUR TSP MONITORING RESULTS
- ANNEX D2 EVENT AND ACTION PLAN FOR DUST MONITORING
- ANNEX D3 METEOROLOGICAL DATA
- ANNEX E NOISE
- ANNEX E1 NOISE MONITORING RESULTS
- ANNEX E2 EVENT AND ACTION PLAN FOR NOISE MONITORING
- ANNEX F SURFACE WATER QUALITY
- ANNEX F1 SURFACE WATER QUALITY MONITORING RESULTS
- ANNEX F2 EVENT AND ACTION PLAN FOR SURFACE WATER QUALITY MONITORING
- ANNEX F3 INVESTIGATION REPORTS OF ENVIRONMENTAL QUALITY LIMIT EXCEEDANCE
- ANNEX G CUMULATIVE STATISTICS ON EXCEEDANCES, ENVIRONMENTAL COMPLAINTS, NOTIFICATION OF SUMMONS AND STATUS OF PROSECUTIONS

EXECUTIVE SUMMARY

The SENT Landfill Extension (SENTX) forms an integral part in the Strategic Plan in maintaining the continuity of landfill capacity in the Hong Kong for the cost-effective and environmentally satisfactory disposal of waste. ERM-Hong Kong, Limited (ERM) is commissioned to undertake the role of Environmental Team (ET) for the construction, operation/restoration and aftercare of SENTX Project ("the Project") in accordance with the requirements specified in the Environmental Permit (EP), updated Environmental Monitoring and Audit (EM&A) Manual, the approved Environmental Impact Assessment (EIA) Report of the Project taking account of the latest design and other relevant statutory requirements. The construction (not including works related to site clearance and preparation) of the Project commenced on 2 January 2019.

This Quarterly EM&A report presents the EM&A works carried out during the period from 1 January to 31 March 2020 for the Project in accordance with the updated EM&A Manual.

Exceedance of Action and Limit Levels for Air Quality

No exceedance of Action and Limit Levels for construction air quality monitoring was recorded in the reporting period.

Exceedance of Action and Limit Levels for Noise

No exceedance of Action and Limit Levels for construction noise monitoring was recorded in the reporting period.

Exceedance of Action and Limit Levels for Surface Water Quality

One exceedance of the Limit Level for Suspended Solids (SS) was recorded for surface water quality impact monitoring in the reporting period. The exceedance was considered non Project-related upon further investigation.

Environmental Complaints, Summons and Prosecutions

There were no complaints, notification of summons or prosecution recorded in the reporting period.

Reporting Change

There was no reporting change in the reporting period.

1 INTRODUCTION

1.1 BACKGROUND

The SENT Landfill Extension (SENTX) forms an integral part in the Strategic Plan in maintaining the continuity of landfill capacity in the Hong Kong for the cost-effective and environmentally satisfactory disposal of waste. The *Environmental Impact Assessment (EIA) Report* and the associated *Environmental Monitoring and Audit (EM&A) Manual* for the construction, operation, restoration and aftercare of the SENTX (hereafter referred to as "the Project") have been approved under the *Environmental Impact Assessment Ordinance (EIAO)* in May 2008 (Register No.: AEIAR-117/2008) (hereafter referred to as the approved EIA Report) and an Environmental Permit (EP-308/2008) (EP) was granted by the Director of Environmental Protection (DEP) on 5 August 2008.

Since then, applications for Variation of an Environmental Permit (No. VEP-531/2017) were submitted to EPD and the Variation of Environmental Permits (EP-308/2008/A and EP-308/2008/B) were granted on 6 January 2012 and 20 January 2017, respectively, as the Hong Kong SAR Government has decided to reduce the scale of the design scheme of SENTX assessed in the approved EIA Report and SENTX will only receive construction waste. In May 2018, a Further Environmental Permit (FEP) (FEP-01/308/2008/B) was granted to the SENTX's contractor, Green Valley Landfill, Limited (GVL).


ERM-Hong Kong, Limited (ERM) and Meinhardt Infrastructure and Environment Limited (Meinhardt) are commissioned to undertake the roles of Environmental Team (ET) and the Independent Environmental Checker (IEC), respectively, to undertake the EM&A activities for the Project in accordance with the requirements specified in the EP, updated EM&A Manual (1), approved EIA Report (2) taking account of the latest design and other relevant statutory requirements.

1.2 PROJECT DESCRIPTION

The SENTX is a piggyback landfill, occupying the southern part of the existing SENT Landfill (including its infrastructure area) and 13 ha of Tseung Kwan O (TKO) Area 137. A layout plan of the SENTX is shown in *Figure 1.1*. Under the latest design, the SENTX has a net void capacity of about 6.5 Mm³ and provides an additional lifespan of about 6 years, commencing operation upon exhaustion of the SENT Landfill. The SENTX will receive construction waste only.

⁽¹⁾ ERM (2018). South East New Territories (SENT) Landfill Extension: Environmental Monitoring & Audit Manual

⁽²⁾ ERM (2007). South East New Territories (SENT) Landfill Extension – Feasibility Study: Environmental Impact Assessment Report

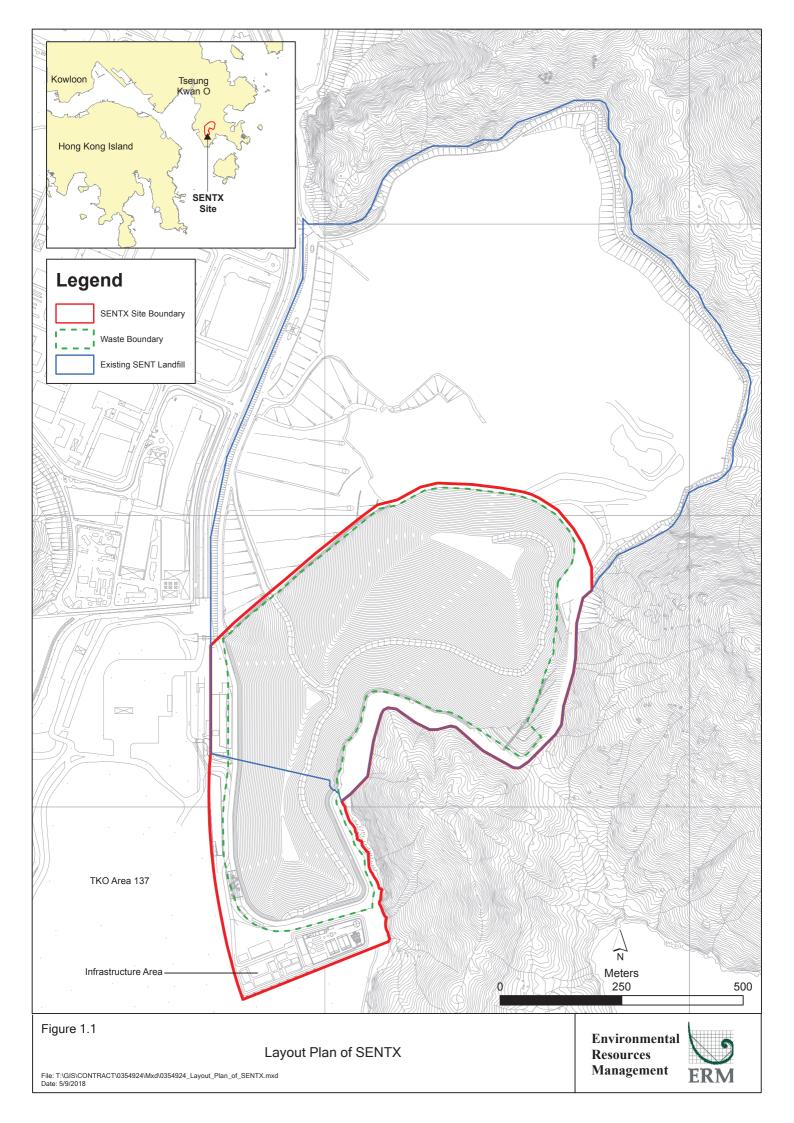

The key implementation milestones of the Project are indicatively summarised in *Table 1.1*. The construction works of the Project commenced on 2 January 2019.

 Table 1.1
 Estimated Key Dates of Implementation Programme

Key Stage of the Project	Indicative Date
Start construction	2 January 2019
Commissioning of new infrastructure facilities	2020
Demolition of existing infrastructure facilities	2021
Start waste intake at SENTX	2021 or upon exhaustion of SENT Landfill
Estimated exhaustion date of SENTX	2027
End of aftercare for SENTX	2057

The major construction works of the SENTX includes:

- Site formation at the TKO Area 137 and the existing infrastructure area at SENT Landfill;
- Construction of surface and groundwater drainage systems;
- Construction of the leachate containment and collection systems;
- Construction of new leachate and landfill gas treatment facilities, site offices, maintenance yards at the new infrastructure area;
- Construction of new pipelines to transfer the leachate and landfill gas
 collected from the existing SENT Landfill to the treatment facilities at
 the new infrastructure area;
- Construction of the site access and new waste reception facilities; and
- Demolition of the facilities at the existing SENT Landfill infrastructure area.


1.3 Scope of the EM&A Report

This is the Quarterly EM&A Report for the Project which summarises the key findings of the EM&A programme during the reporting period from 1 January to 31 March 2020 for the construction works.

1.4 PROJECT ORGANISATION

The organisation structure of the Project is presented in *Figure 1.2*.

Figure 1.2 Organisation Chart

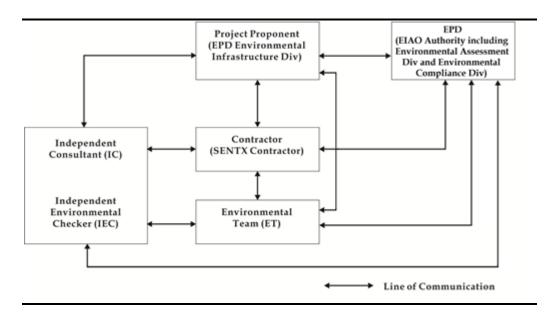

Contact details of the key personnel are summarized in *Table 1.2* below.

Table 1.2 Contact Information of Key Personnel

Party	Position	Name	Telephone
Contractor	Project Manager	Gary Barnicott	2706 8827
(Green Valley Landfill	Complaint Hotline		
Limited)			
Environmental Team (ET)	ET Leader	Frank Wan	2271 3152
(ERM-Hong Kong, Limited)			
Independent Environmental	IEC	W.K. Chiu	2859 1881
Checker (IEC)			
(Meinhardt Infrastructure			
and Environment Limited)			
,			

1.5 SUMMARY OF CONSTRUCTION WORKS

The programme of the construction is shown in *Annex A*. As informed by the Contractor, the major works carried out in this reporting period include:

January 2020

- Building services works for control building of Landfill Gas Plant;
- Paving works at Landfill Gas Plant area;
- Flares and cooling towers installation of Landfill Gas Plant;
- Excavating, removing and replacing unsuitable fill materials;
- Construction of last bay of outlet box culvert;

- Rebar fixing, formwork and concreting to the superstructure of laboratory building;
- Installation of ammonia stripping plant, equalization tank, sequencing batch reactor tank and treated effluent tank at Leachate Treatment Plant (LTP) area;
- Construction of perimeter bund for Cell 2X;
- Maintenance and improvement of the temporary surface water drainage;
- Shotcreting and mass concrete for Buttress Wall;
- Installing groundwater pipe works from South to North at eastern side from Cell 3X to 4X;
- Liner installation at Cell 1X and 2X;
- Pipe rack installation;
- Construction of plinths of maintenance building;
- Construction of footing of fire service tank room and water tank room;
- Construction of perimeter bund channel; and
- Construction of pits and ducting for underground utilities.

February 2020

- Building services works for control building of Landfill Gas Plant;
- Paving works at Landfill Gas Plant area;
- Flares and cooling towers installation of Landfill Gas Plant;
- Excavating, removing and replacing unsuitable fill materials;
- Construction of drop inlet shaft, MHX1 manhole and inlet and outlet box culverts;
- Civil provisional works of LTP and superstructure of Bioplant building;
- Building services works for infrastructure buildings (EPD building, GVL building and laboratory building;
- Installation of ammonia stripping plant, equalization tank, sequencing batch reactor tank, treated effluent tank and Glass Reinforced Plastic (GRP) tanks at LTP area;
- Construction of perimeter bund for Cell 2X;
- Maintenance and improvement of the temporary surface water drainage;

- Shotcreting and mass concrete for Buttress Wall;
- Installing groundwater pipe works from South to North at Eastern side from Cell 3X to 4X;
- Liner installation at Cell 1X and 2X;
- Pipe rack installation;
- Installation of monitoring wells;
- Construction of footing of maintenance building;
- Construction of footing of fire service tank room and water tank room;
- Construction of perimeter bund channel; and
- Construction of pits and ducting for underground utilities.

March 2020

- Building services works and fitting-out works for Landfill Gas Plant area;
- Building services works and fitting-out works for infrastructure buildings (EPD building, GVL building and laboratory building);
- Installation of accessories such as staircases, pipes and walkways for equalization tanks, sequencing batch reactor tanks, treated effluent tank, GRP tanks and other tanks at LTP area;
- Placing leachate stone at Cell 2X;
- Maintenance and improvement of the temporary surface water drainage;
- Shotcreting and mass concrete for Buttress Wall;
- Finishing works for Western perimeter bund;
- Construction of perimeter bund channel;
- Installation of monitoring well LFG23;
- Construction of superstructure of fire service tank room and water service room; and
- Construction of pits and ducting for underground utilities.

The implementation schedule of the mitigation measures recommended in the Updated EM&A Manual is presented in *Annex B*.

1.6 SUMMARY OF EM&A PROGRAMME REQUIREMENTS

The status for all environmental aspects are presented in *Table 1.3*. The EM&A requirements remained unchanged during the reporting period.

Table 1.3 Summary of Status for the Environmental Aspects under the Updated EM&A Manual

Parameters	Status
Air Quality	
Baseline Monitoring	The results of baseline air quality monitoring were reported in <i>Baseline Monitoring Report</i> and submitted to EPD under EP Condition 3.3
Impact Monitoring	On-going On-going
Noise	0 0
Baseline Monitoring	The results of baseline noise monitoring were reported in <i>Baseline Monitoring Report</i> and submitted to EPD under EP Condition 3.3
Impact Monitoring	On-going
Surface Water Quality	
Baseline Monitoring	The results of baseline surface water quality monitoring were reported in <i>Baseline Monitoring Report</i> and submitted to EPD under EP Condition 3.3
Impact Monitoring	On-going
Waste Management	
Waste Monitoring	On-going
Landscape and Visual	
Baseline Monitoring	The results of baseline landscape and visual monitoring were reported in <i>Baseline Monitoring Report</i> and submitted to EPD under EP Condition 3.3
Construction Phase Audit	On-going
Site Environmental Audit	
Regular Site Inspection	On-going
Complaint Hotline and Email	On-going
Channel	
Environmental Log Book	On-going On-going
Groundwater Quality	
Pre-operation Baseline	Commenced on 24 March 2020
Monitoring	
Landfill Gas	
Pre-operation Baseline	Commenced on 24 March 2020
Monitoring	

Taking into account the construction works, impact monitoring of air quality, noise, surface water quality and waste management were carried out in the reporting period. The impact monitoring schedule of air quality, noise and surface water quality monitoring are provided in *Annex C*. Groundwater and landfill gas pre-operation baseline monitoring were commenced on 24 March 2020.

The EM&A programme also involved environmental site inspections and related auditing conducted by the ET for checking the implementation of the required environmental mitigation measures recommended in the approved EIA Report and relevant EP submissions. To promote the environmental awareness and enhance the environmental performance of the contractors,

environmental trainings and regular environmental management meetings were conducted during the reporting period, which are summarised as below:

- Three environmental management meetings were held with the Contractor, ER, ET, IEC and EPD on 8 January, 27 February and 19 March 2020; and
- Environmental toolbox trainings on the following topics were provided by the Contractor to the workers:
 - An Introduction to the Air Pollution Control (Smoke) Regulations on 6 January 2020;
 - Clean Recycling on 17 January 2020;
 - Quality Powered Mechanical Equipment on 11 February 2020;
 - Green Procurement on 24 February 2020;
 - Mosquito Control on 8 March 2020; and
 - Illegal Dumping on 25 March 2020.

1.7 STATUS OF STATUTORY ENVIRONMENTAL COMPLIANCE WITH THE ENVIRONMENTAL PERMIT

The status of statutory environmental compliance with the EP conditions under the EIAO, submission status under the EP and implementation status of the recommended mitigation measures are presented in *Table 1.4*.

Table 1.4 Status of Submissions required under the EP and Implementation Status of the recommended Mitigation Measures

EP Condition	Submission/Implementation Status	Status
2.3	Management Organisation of Main Construction Companies	Submitted and accepted by EPD.
2.4	Setting up of Community Liaison Group	Community Liaison Group was set up.
2.5	Submission of Detailed Landfill Gas Hazard Assessment Report	Submitted, and accepted by EPD on 10 January 2019.
2.6	Submission of Restoration and Ecological Enhancement Plan	Submitted to EPD on 28 June 2019.
2.7	Setting up of Trial Nursery	Trial Nursery works was commenced on 28 August 2019.
2.8	Advance Screen Planting	Advance Screen Planting works were completed on 28 June 2019.
2.9	Provision of Multi-layer Composite Liner System	Under implementation.

1.8 STATUS OF OTHER STATUTORY ENVIRONMENTAL REQUIREMENTS

The environmental licenses and permits (including EP, *Water Pollution Control Ordinance* (WPCO) discharge license, registration as a chemical waste producer, and construction noise permit) that are valid in the reporting period are presented in *Table 1.5*. No non-compliance with environmental statutory requirements was identified.

Table 1.5 Status of Statutory Environmental Requirements

Description	Ref No.	Status
Environmental Permit	EP-308/2008	Granted on 5 August 2008
Variation of Environmental Permit	EP-308/2008/A	Granted on 6 January 2012
	EP-308/2008/B	Granted on 20 January 2017
Further Environmental Permit	FEP-01/308/2008/B	Granted on 16 May 2018
Water Discharge License under WPCO (Permit Holder: Chun Wo)	Licence No.: WT00033525- 2019	Validity from 27 March 2019 to 31 March 2024
Billing Account for Disposal of Construction Waste	Chit Account Number: 5001692	Approved on 28 December 2005
Registration as a Chemical Waste Producer (Permit Holder: Chun Wo)	5213-839-C3507-10	Issued on 23 August 2018
Registration as a Chemical Waste Producer (Permit Holder: REC)	5518-839-R2289-06	Issued on 24 October 2019
Construction Noise Permit (Permit Holder: GVL)	GW-RE0075-20	Validity from 12 February 2020 to 11 August 2020
Construction Noise Permit (Permit Holder: Chun Wo)	GW-RE1001-19	Validity from 16 December 2019 to 10 June 2020
Construction Noise Permit (Permit Holder: REC)	GW-RE0029-20	Validity from 20 January 2020 to 31 May 2020

2 EM&A RESULTS

The EM&A programme for the Project required environmental monitoring for air quality, noise and surface water quality as well as environmental site inspections for air quality, noise, surface water quality, waste management, and landscape and visual impacts. The EM&A requirements and related findings for each component are summarised in the following sections.

2.1 AIR QUALITY MONITORING

2.1.1 Monitoring Requirements and Equipment

According to the updated EM&A Manual of the Project, impact air quality monitoring (dust, in term of Total Suspended Particulates (TSP)) was carried out at the two designated monitoring locations (i.e. DM1 and DM2) at a 6-day interval. It is proposed and agreed by IEC and EPD that the two existing TSP monitoring stations (i.e. TKO-A1 and TKO-A2a) currently operating by the Civil Engineering and Development Department (CEDD) can be used to monitor the 24-hour TSP impact associated with the SENTX construction. The dust monitoring results were obtained from CEDD on regular basis.


The Action and Limit Levels of the air quality monitoring is provided in *Table 2.1* below.

Table 2.1 Action and Limit Levels for 24-hour TSP

Monitoring Station	Action Level	Limit Level
DM-1 - Site Egress of TKO Area 137 Fill Bank	204 μg m- ³	260 μg m- ³
DM-2A -Combined Reception and Exit Office (CREO) of TKO Area 137 Fill Bank	193 μg m- ³	260 μg m- ³

High volume air samplers (HVSs) in compliance with the specifications listed under Section 3.2.2 of the updated EM&A Manual were used to measure 24-hour TSP levels at the CEDD dust monitoring stations. The HVSs were calibrated upon installation and thereafter at bi-monthly intervals to check the validity and accuracy of the results.

The equipment used in the impact air quality monitoring programme and monitoring locations are summarised in *Table 2.2* and illustrated in *Figure 2.1* respectively.

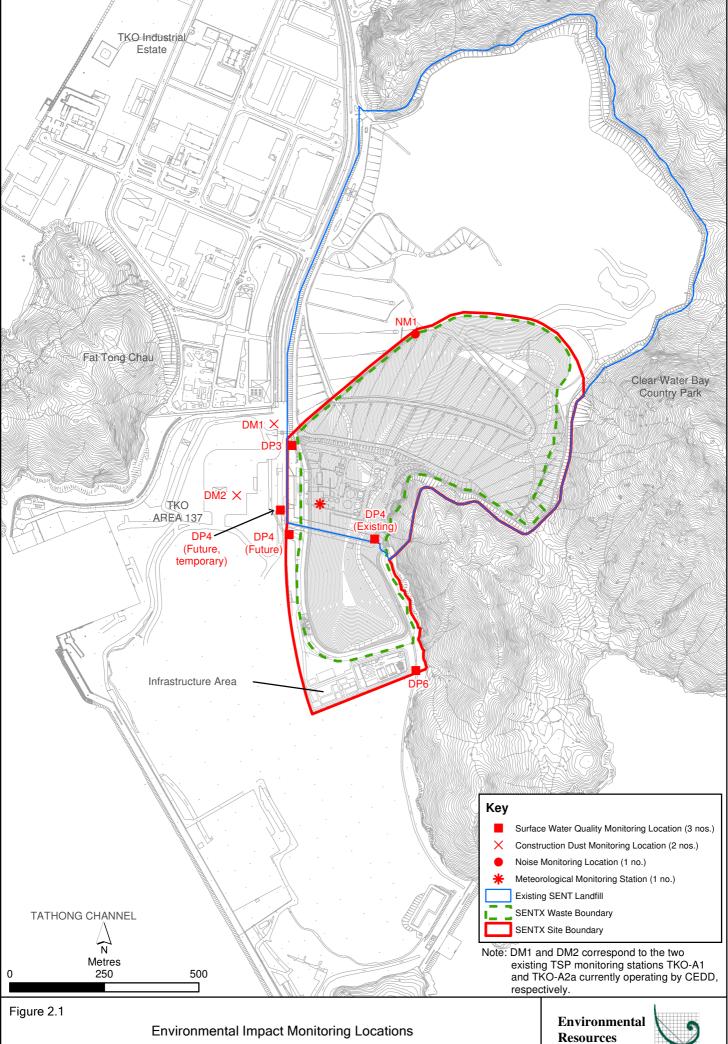

 $File: T. \\ IGIS/CONTRACT/0465169 \\ Imxd/0465169 \\ Environmental_Impact_Monitoring_Locations. \\ mxd/Date: 28/5/2019$

Management



Table 2.2 Dust Monitoring Details

Monitoring Station	Location	Parameter	Frequency and Duration	Monitoring Dates	Equipment
DM1 DM2	Site Egress of TKO Area 137 Fill Bank Combined	24-hour TSP	Once every 6 days during the construction phase of the	January 2020 4, 10, 16, 22, 28 February 2020	HVS Greasby 105 (S/N: 9795 (ET/EA/003/18)) HVS Andersen G1051 (S/N: 1176
	Reception and Exit Office (CREO) of TKO Area 137 Fill Bank		Project	5, 11, 17, 23, 29 March 2020	(ET/EA/003/05))

2.1.2 Monitoring Schedule for the Reporting Period

The schedule for air quality monitoring during the reporting period is provided in *Annex C*.

2.1.3 Results and Observations

The 24-hour TSP monitoring results are summarised in *Table 2.3*. The detailed monitoring results and the graphical presentation of the 24-hour TSP monitoring results at each monitoring location are provided in *Annex D1*.

Table 2.3 Summary of 24-hour TSP Monitoring Results in the Reporting Period

Month	Monitoring	24-hr TSP Concentration (µg m ⁻³)		Action Level	Limit Level	
	Station	Average	Range	(μg/m³)	(μg/m³)	
January 2020	DM-1	110	95 - 124	204	260	
	DM-2	96	82 - 108	193	260	
February 2020	DM-1	103	93 - 117	204	260	
	DM-2	90	83 - 104	193	260	
March 2020	DM-1	102	91 - 113	204	260	
	DM-2	90	85-94	193	260	

The major dust sources in the reporting period included fugitive dust emission from exposed area in SENTX, as well as nearby operations of the existing SENT landfill and the TKO Area 137 Fill Bank.

All the 24-hour TSP results measured at the two monitoring stations were below the Action and Limit Levels in the reporting period. No additional measure is thus required in accordance with the Event and Action Plan presented in *Annex D2*.

2.1.4 Meteorological Data

Meteorological data obtained from the on-site meteorological monitoring station at the existing SENT landfill (see *Figure 2.1*) were used for the dust monitoring and are shown in *Annex D3*. The meteorological station will be moved to a new location at SENTX infrastructure area as per the updated EM&A Manual after the construction of the new infrastructure area is

completed. For the purpose of this EM&A programme, it is considered that meteorological data obtained at the existing SENT landfill meteorological monitoring station are representative of the Project area and could be used for the interpretation of the construction phase dust monitoring results.

2.2 Noise Monitoring

2.2.1 Monitoring Requirements and Equipment

According to the updated EM&A Manual of the Project, impact noise monitoring was conducted weekly at the monitoring location (i.e. NM1) to obtain one set of 30 minutes measurement between 07:00 and 19:00 hours on normal weekdays.

The Action and Limit Levels for construction noise of the Project are provided in *Table 2.4* below.

Table 2.4 Action and Limit Levels for Construction Noise

Time Period	Action Level (a)	Limit Level (b)
07:00 – 19:00 hrs on normal weekdays	When one documented complaint is received from any one of the noise sensitive receivers (NSRs)	75 dB(A) at NSRs
	or	
	75 dB(A) recorded at the monitoring station	

Notes:

- (a) 75dB(A) along and at about 100m from the SENTX site boundary was set as the Action Level.
- (b) Limits specified in the GW-TM and IND-TM for construction and operational noise, respectively.

Noise monitoring was performed by ALS Technichem (HK) Pty Ltd (HOKLAS Registration No. 066) using a sound level meter placed at the designated monitoring station NM1 (see *Figure 2.1*) in accordance with the requirements stipulated in the updated EM&A Manual. Acoustic calibrator was deployed to check the sound level meter at a known sound pressure level. Details of the deployed equipment are provided in *Table 2.5*.

Table 2.5 Noise Monitoring Details

Monitoring	Location	Parameter	Frequency and	Monitoring	Equipment
Station (1)			Duration	Dates	
NM1	SENTX Site	Leq (30 min)	Once per week	3, 9, 16, 23, 30	Sound Level
	Boundary	measurement	for 30 mins	January 2020	Meter: B&K
	(North)	between 07:00	during the	6, 12, 20, 27	2238 (S/N:
		and 19:00	construction	February 2020	2285762)
		hours on	period of the	5, 12, 18, 26	
		normal	Project	March 2020	Acoustic
		weekdays			Calibrator:
		(Monday to			Rion NC-74
		Saturday)			(S/N: 34657231)

2.2.2 Monitoring Schedule for the Reporting Period

The schedule for noise monitoring during the reporting period is provided in *Annex C*.

2.2.3 Results and Observations

A total of 13 impact noise monitoring events were scheduled during the reporting period. However, monitoring was not conducted on 18 March 2020 due to adverse weather condition. The noise monitoring results are summarised in *Table 2.6* and graphically presented in *Annex E1*.

Table 2.6 Summary of Construction Noise Monitoring Results in the Reporting Period

Month	Monitoring	toring Measured Noise Level L _{eq (30 min)} , dB(A)						
	Station	Average	Range	Action and Limit Level				
January 2020	NM1	50.5	47.8 - 53.0	75				
February 2020	NM1	52.7	51.9 - 53.8	75				
March 2020	NM1	52.5	50.5 - 54.9	75				

Major noise sources identified during the noise monitoring included noise from operations of the existing SENT landfill and the TKO Area 137 Fill Bank, aircrafts and insects.

No exceedance of the Action and Limit Levels for construction noise monitoring was recorded in the reporting period. No further mitigation measure was required in accordance with the Event and Action Plan presented in *Annex E2*.

2.3 SURFACE WATER QUALITY MONITORING

2.3.1 Monitoring Requirements and Equipment

According to the updated EM&A Manual of the Project, impact surface water quality monitoring were carried out at the three designated surface water discharge points (i.e. DP3, DP4 and DP6) weekly to ensure that the SENTX will not cause adverse water quality impact. Temporary relocation of surface water discharge point DP4 to DP4 (Future, temporary) as an interim

arrangement due to site constraints and construction sequence was approved by EPD on 14 May 2019. Impact surface water quality monitoring was carried out at DP4 (Future, temporary) (i.e. DP4T) from the monitoring event on 16 May 2019. In addition, suspension of impact surface water quality monitoring at DP3 was approved under the Baseline Monitoring Report by EPD on 24 July 2019 until the actual commencement of construction works affecting DP3 in 2021.

Dissolved Oxygen (DO) and pH value were measured *in situ* whereas the level of suspended solids (SS) were determined by ALS Technichem (HK) Pty Ltd (HOKLAS Registration No. 066).

The Action and Limit Levels of the surface water quality impact monitoring are provided in *Table 2.7*.

Table 2.7 Action and Limit Levels for Surface Water Quality

Parameters	Action Level	Limit Level	Limit Level			
	DP4 & DP6					
DO	$< 5.80 \mathrm{mg/L}$	$< 5.42 \mathrm{mg/L}$				
SS	$> 11.7 \mathrm{mg/L}$	> 12.7 mg/L				
рН	> 8.39	> 8.40				

The locations of the monitoring stations for the Project are shown in *Figure 2.1*. All *in situ* monitoring instruments were checked, calibrated and certified by a laboratory accredited under HOKLAS or other international accreditation scheme before use, and subsequently re-calibrated at 3 monthly intervals throughout all stages of the surface water quality monitoring programme. Calibration for a DO meter was carried out before measurement according to the instruction manual of the equipment model. Details of the equipment used in the impact surface water quality monitoring works are provided in *Table 2.8*.

Table 2.8 Impact Surface Water Quality Monitoring Details

Monitoring Station	Location	Frequency	Monitoring Dates	Parameter	Equipment
DP4 (Future, temporary)	Surface water discharge point DP4	Weekly	3, 9, 16, 23, 30 January 2020 6, 12, 20, 27 February 2020	•pH •DO •SS	YSI Professional Plus (S/N: 10G101946)
DP6	Surface water discharge point DP6	-	5, 12, 18, 26 March 2020		YSI Professional DSS (S/N: 17B102764)

Notes:

- (a) DP4 was temporary relocated to DP4 (Future, temporary) (i.e. DP4T) as an interim discharge point from the monitoring event on 16 May 2019.
- (b) Impact surface water quality monitoring at DP3 was suspended from the monitoring event on 25 July 2019 until the actual commencement of construction works affecting DP3 in 2021.

2.3.2 Monitoring Schedule for the Reporting Period

The schedule for surface water quality monitoring during the reporting period is provided in *Annex C*.

2.3.3 Results and Observations

A total of 13 monitoring events for impact surface water quality monitoring were scheduled at all designated monitoring stations during the reporting period. However, sampling could not be carried out on 20 February 2020 at DP6 and in January and March 2020, on 6, 12 and 27 February 2020 at all monitoring locations due to insufficient flow. Impact water quality monitoring results and graphical presentations are provided in *Annex F1*.

Action and Limit Level exceedance was recorded for surface water quality impact monitoring in the reporting period and actions in accordance with the Event and Action Plan presented in *Annex F2* were undertaken. Investigation on the Action and Limit Levels exceedance was conducted and summarised in *Table 2.9* below. Investigation report of the exceedance is presented in *Annex F3*.

Table 2.9 Details of Exceedances Recorded for Surface Water Quality Monitoring

Date	Monitoring Location	Parameter	Type of Exceedance	Remarks		
20 February 2020	DP4 (Future, temporary)	SS	Limit Level	Non Project-related		

Based on the investigation conducted for the monitoring event with potential Action and Limit Levels exceedance with the Contractor, and the IEC, the SS exceedance at DP4 (Future, temporary) on 20 February 2020 was considered non Project-related upon further investigation.

The Contractor was reminded to implement all relevant mitigation measures for the construction works and maintain good site practice. The ET will keep track on the monitoring data and ensure Contractor's compliance of the environmental requirements.

2.4 LANDSCAPE AND VISUAL MONITORING

2.4.1 Monitoring Requirements

According to the updated EM&A Manual of the Project, the monthly landscape and visual audit was conducted on 31 January, 26 February and 25 March 2020 to monitor the implementation of the landscape and visual mitigation measures during construction phase.

All relevant environmental mitigation measures listed in the approved EIA Report and the updated EM&A Manual and their implementation status are summarised in *Annex B*.

2.4.2 Results and Observations

The Contractor has implemented environmental mitigation measures as stated in the approved EIA Report and the EM&A Manual.

Regarding the landscape and visual audit, the Contractor was reminded to maintain the advance screen planting works as soon as possible to ensure effective screening of views of project works from the High Junk Peak Trail. The Contractor has considered the mitigation measures during the design phase, including the preparation of the Construction Drawings and Detailed Landscape Design Drawings.

2.5 EM&A SITE INSPECTION

Site inspections were carried out on a weekly basis with the Contractor, IEC and ER to monitor the implementation of proper environmental pollution control and mitigation measures for air quality, noise, surface water quality and waste management under the Project. In the reporting period, 12 site inspections were carried out on 8, 16, 22 and 30 January, 6, 12, 20 and 27 February, 5, 12, 19 and 26 March 2020.

Key observations during the site inspections are summarized in *Table 2.10*.

Table 2.10 Key Observations Identified during the Site Inspections in this Reporting Period

Inspection Date	Environmental Observations and Recommendations
8 January 2020	 The Contractor shall cover the stockpile of dusty materials and
	conduct shotcrete mixing works in an area sheltered on the top and
	three sides near buttress wall to minimize dust impacts.
	The Contractor shall store the construction waste properly in refuse
	skips and dispose of the waste regularly near buttress wall and
	future LFG plant.
	The Contractor shall clear the general refuse disposed near buttress
	wall, future bioplant and at the temporary drain at Southern site
	boundary and dispose of the waste accumulated regularly to reduce
	odour and pest issues.
16 January 2020	• The Contractor shall conduct activities related to dusty materials i.e.
	shotcrete mixing works in an area sheltered on the top and three
	sides near buttress wall to minimize dust impacts.
	The Contractor shall maintain the haul road near buttress wall to
	minimize SS runoff to DP3 channel.
	• The Contractor shall provide drip tray for chemicals stored at future
	bioplant.
	The Contractor shall avoid accumulation of stagnant water near
	LTP and spray larvicides for pest control.
	The Contractor shall segregate and store construction waste and
	general refuse in different skips and dispose of the waste
	accumulated near wheel washing facilities, future EPD building and
	future bioplant regularly.
22 January 2020	The Contractor shall display NRMM label on the new sheet piling
, ,	back hoe near Cell 1X and replace the faded NRMM label on the
	excavator near future maintenance building.
	The Contractor shall remove the stagnant water accumulated in the
	drip tray near future GVL building to ensure effective containment
	of leakage.
	The Contractor shall avoid accumulation of stagnant water near
	future GVL building and spray larvicides for pest control.
	The Contractor shall segregate general refuse from construction
	waste near future maintenance building and bioplant and store the
	general refuse in enclosed bins near the site entrance to reduce
	odour and pest issues.
30 January 2020	The Contractor shall clear the general refuse accumulated in the
- > J	temporary drain near site entrance and near future bioplant.
	The Contractor shall avoid accumulation of stagnant water near
	future GVL building and bioplant to minimise pest issues.
	 The Contractor shall remove the spray paint at DP6 and dispose of
	the waste as chemical waste.
6 February 2020	The Contractor shall remove the deposited silt and grit at DP4T
5 1 CD1 daily 2020	channel (near buttress wall) regularly to ensure it is functioning
	properly at all times.
	The Contractor shall arrange collection of chemical waste stored in the chemical waste cabinet pear site entrance and dispuse of the
	the chemical waste cabinet near site entrance and dispose of the
	chemical waste accumulated on site regularly.
	The Contractor shall clear the general refuse accumulated at DP6
	channel.

Inspection Date	Environmental Observations and Recommendations
12 February 2020	The Contractor shall provide drip trays for chemicals placed near
	sediment trap and future GVL building.
	• The Contractor shall remove the stagnant water accumulated in the
	drip trays near sediment trap and future bioplant and treat the
	clean-up materials as chemical waste.
	• The Contractor shall store the general refuse near site entrance and
	buttress wall in refuse skips properly and dispose of the waste
	accumulated regularly.
20 February 2020	 The Contractor shall clear the chemical spillage near sediment trap and handle the clean-up materials as chemical waste.
	The Contractor shall maintain the drip tray near sediment trap and
	remove the stagnant water accumulated in the drip trays near
	sediment trap and future GVL building.
	The Contractor shall avoid accumulation of stagnant water in the
	drain around future LTP to minimise pest issues.
	The Contractor shall store the construction waste near future
	laboratory building and bioplant properly in refuse skips and
	dispose of the waste regularly.
	The Contractor shall segregate and dispose of the general refuse
	accumulated near future bioplant and remove the stagnant water
	accumulated in the refuse skips.
27 February 2020	The Contractor shall enhance watering to the site, especially to the
•	perimeter bund and haul road to minimise dust impacts.
	The Contractor shall replace the faded NRMM labels on the
	generator near site entrance and on the excavator near DP4T and
	ensure all labels displayed on site are clearly visible.
	The Contractor shall avoid accumulation of stagnant water near site
	entrance, channel X10a, sump house and DP4T channel near
	buttress wall to minimise pest issues.
	The Contractor shall store the general refuse separately from
	construction waste in the refuse skip near wheel washing facilities.
	The Contractor shall remove the general refuse near Western site
	boundary and dispose of the waste regularly.
5 March 2020	The Contractor shall conduct activities related to dusty materials i.e.
	shotcrete mixing near DP4T channel in an area sheltered on the top
	and three sides to minimise dust impact.
	The Contractor shall display NRMM label on the bulldozer near
	sediment trap.
	The Contractor shall provide drip trays for chemicals stored near
	buttress wall, DP4T channel and future GVL building.
	The Contractor shall remove the stagnant milky water near future
	bioplant and LTP sump pit and treat as chemical waste.
	The Contractor shall dispose of the construction waste accumulated
	near buttress wall regularly.
	• The Contractor shall remove the general refuse near future bioplant
	to reduce odour and pest issues.
12 March 2020	• The Contractor shall remove the deposited silt and grit in the DP4T
	channel near buttress wall to ensure the channel is functioning
	properly.
	The Contractor shall replace the faded NRMM label on the
	excavator near DP4T channel.
	The Contractor shall provide drip tray for the chemical placed near
	buttress wall.
	The Contractor shall store the construction waste accumulated near

Inspection Date	Environmental Observations and Recommendations
19 March 2020	The Contractor shall maintain the drain along Western site
	boundary and dispose of the general refuse and chemical waste
	accumulated in the drain separately.
	 The Contractor shall replace the faded NRMM labels on the
	bulldozer and roller near sediment trap.
	The Contractor shall provide drip tray for the chemical placed near
	future GVL building.
	• The Contractor shall avoid accumulation of stagnant water in X10a
	channel and around future GVL building.
	 The Contractor shall remove the general refuse near future LFG
	plant and at DP6 channel.
26 March 2020	The Contractor shall replace the faded NRMM label displayed on
	the air compressor near buttress wall.
	• The Contractor shall clear the oil spillage at the drip tray near DP6
	channel and treat the clean-up materials as chemical waste.
	The Contractor shall provide drip trays for chemicals placed near
	DP4T channel and future laboratory building.
	The Contractor shall avoid accumulation of stagnant water in the
	sump pit near future LTP and treat the water before discharge.
	 The Contractor shall store general refuse separately from
	construction waste in the refuse skip near DP4T channel.
	The Contractor shall dispose of the waste accumulated near buttress
	wall regularly.

The Contractor has rectified all of the observations identified during environmental site inspections in the reporting period. Key environmental deficiencies identified and the corresponding rectification actions are presented in *Table 2.11*.

Table 2.11 Summary of Environmental Deficiencies Identified and Corresponding Additional Control Measures

Deficiencies	Rectifications Implemented	Proposed Additional Control Measures
Surface Water		
Intercepting channels & drainage system	Reviewed drainage plan.	 Provision of additional drainage channels. Expedite the construction of permanent sediment trap and discharge culverts.
DP channels (design & regular silt removal)	 Carried out regular maintenance and cleaning of channels. DP4 channel: Area near the channel was paved with concrete and a bund was built. DP6 channel: Gravel piles on the channel were covered with concrete which serve as blocks for running water and to divide the channel into several sections. A pump was placed in the water zone in the upstream section to pump water to the Wetsep for treatment prior to the discharge to the last section before the weir plate. DP6: Pipes through the gravel piles between different channel sections were covered with geotextiles to block debris and silt. 	N.A.
Stockpiles & exposed soil	• Installed silt fencing near surface water channel along DP6 channel.	 Improve soil covering. Compaction and cover for stockpiles and soil slopes.
Wetsep (treatment capacity & number)	 Reviewed Wetsep capacity. Chemicals dosage of the Wetsep was increased to enhance the efficiency. 	Install additional Wetsep.
Backflow / ponding during heavy rainfall	Raised with EPD (LDG) and CEDD.	N.A.

2.6 WASTE MANAGEMENT STATUS

The Contractor has registered as a chemical waste producer under the Contract. Sufficient numbers of receptacles were available for general refuse collection and sorting.

As informed by the Contractor, waste generated during this reporting period include mainly inert C&D materials. Reference has been made to the waste flow table prepared by the Contractor. The quantities of different types of wastes and imported fill materials are summarised in *Table 2.12*.

Table 2.12 Quantities of Different Waste Disposed and Imported Fill Materials

Month/ Year	Inert C&D Materials ^(a) (in '000m ³)	Imported Fill (in '000kg) (b)		Inert Construction Waste Re- used	Non-inert Construction Waste (c) (in '000m³)	Recyclable Materials (d) (in '000kg)	Chemical Wastes (in '000kg)
		Rock	Soil	(in '000m ³)			
January 2020	0.583	0	1742.440	0	0.122	0	0
February 2020	0.260	0	1992.480	0	0.076	0	0.195
March 2020	0.093	0	0	0	0.138	0	0

Notes:

- (a) Inert construction wastes include hard rock and large broken concrete, and materials disposed as public fill. Density assumption: 1.6 (t/m³) for public fill.
- (b) Imported fill refers to materials generated from other project for on-site resue.
- (c) Non-inert construction wastes include general refuse disposed at landfill. Density assumption: $0.9 \, (t/m^3)$ for general refuse.
- (d) Recyclable materials include metals, paper, cardboard, plastics and others.

2.7 IMPLEMENTATION STATUS OF ENVIRONMENTAL MITIGATION MEASURES

A summary of the Environmental Mitigation Implementation Schedule is presented in *Annex B*. The necessary mitigation measures were implemented properly for the Project.

2.8 SUMMARY OF EXCEEDANCES OF THE ENVIRONMENTAL QUALITY PERFORMANCE LIMIT

The 24-hour TSP monitoring results and construction noise monitoring results complied with the Action and Limit Levels in the reporting period. One exceedance of the Limit Level for SS was recorded for surface water quality impact monitoring in the reporting period. The SS exceedance at DP4 (Future, temporary) on 20 February 2020 was considered not Project-related upon further investigation.

Cumulative statistics on exceedances is provided in *Annex G*.

2.9 SUMMARY OF COMPLAINTS, NOTIFICATION OF SUMMONS AND SUCCESSFUL PROSECUTIONS

There were no complaints, notification of summons or prosecution recorded in the reporting period.

Statistics on complaints, notifications of summons and successful prosecutions are summarised in *Annex G*.

3 CONCLUSION AND RECOMMENDATION

This Quarterly EM&A Report presents the findings of the EM&A activities undertaken during the period from 1 January to 31 March 2020 in accordance with the updated EM&A Manual and the requirements of the Environmental Permit (*EP-308/2008/B*).

Air quality (24-hour TSP), noise and water quality (DO, pH and SS) monitoring were carried out in the reporting period. Results for air quality monitoring (24-hour TSP) complied with the Action and Limit Levels in the reporting period. No Action and Limit Levels exceedances were recorded for construction noise monitoring. One exceedance of the Limit Level for SS was recorded for surface water quality impact monitoring in the reporting period. The SS exceedance at DP4 (Future, temporary) on 20 February 2020 was considered not Project-related upon further investigation.


Twelve environmental site inspections were carried out during the reporting period. Environmental deficiencies were identified during the site inspection and the Contractor has proposed additional control measures to rectify the deficiencies.

There were no complaints, notification of summons or prosecution recorded in the reporting period.

It is noted that most environmental pollution control and mitigation measures were properly implemented and the construction activities of the Project did not introduce any adverse impact to the sensitive receivers in the reporting period. Yet, some environmental deficiencies were identified during the reporting period and additional control measures have been proposed by the Contractor to rectify the corresponding deficiencies. The monitoring programme has been reviewed and was considered as adequate to cater for the nature of works in progress. Change to the monitoring programme was thus not recommended at this stage. The monitoring programme will be evaluated as appropriate in the next reporting period. The ET will keep track on the construction works to confirm compliance of environmental requirements and the proper implementation of all necessary mitigation measures.

Annex A

Work Programme

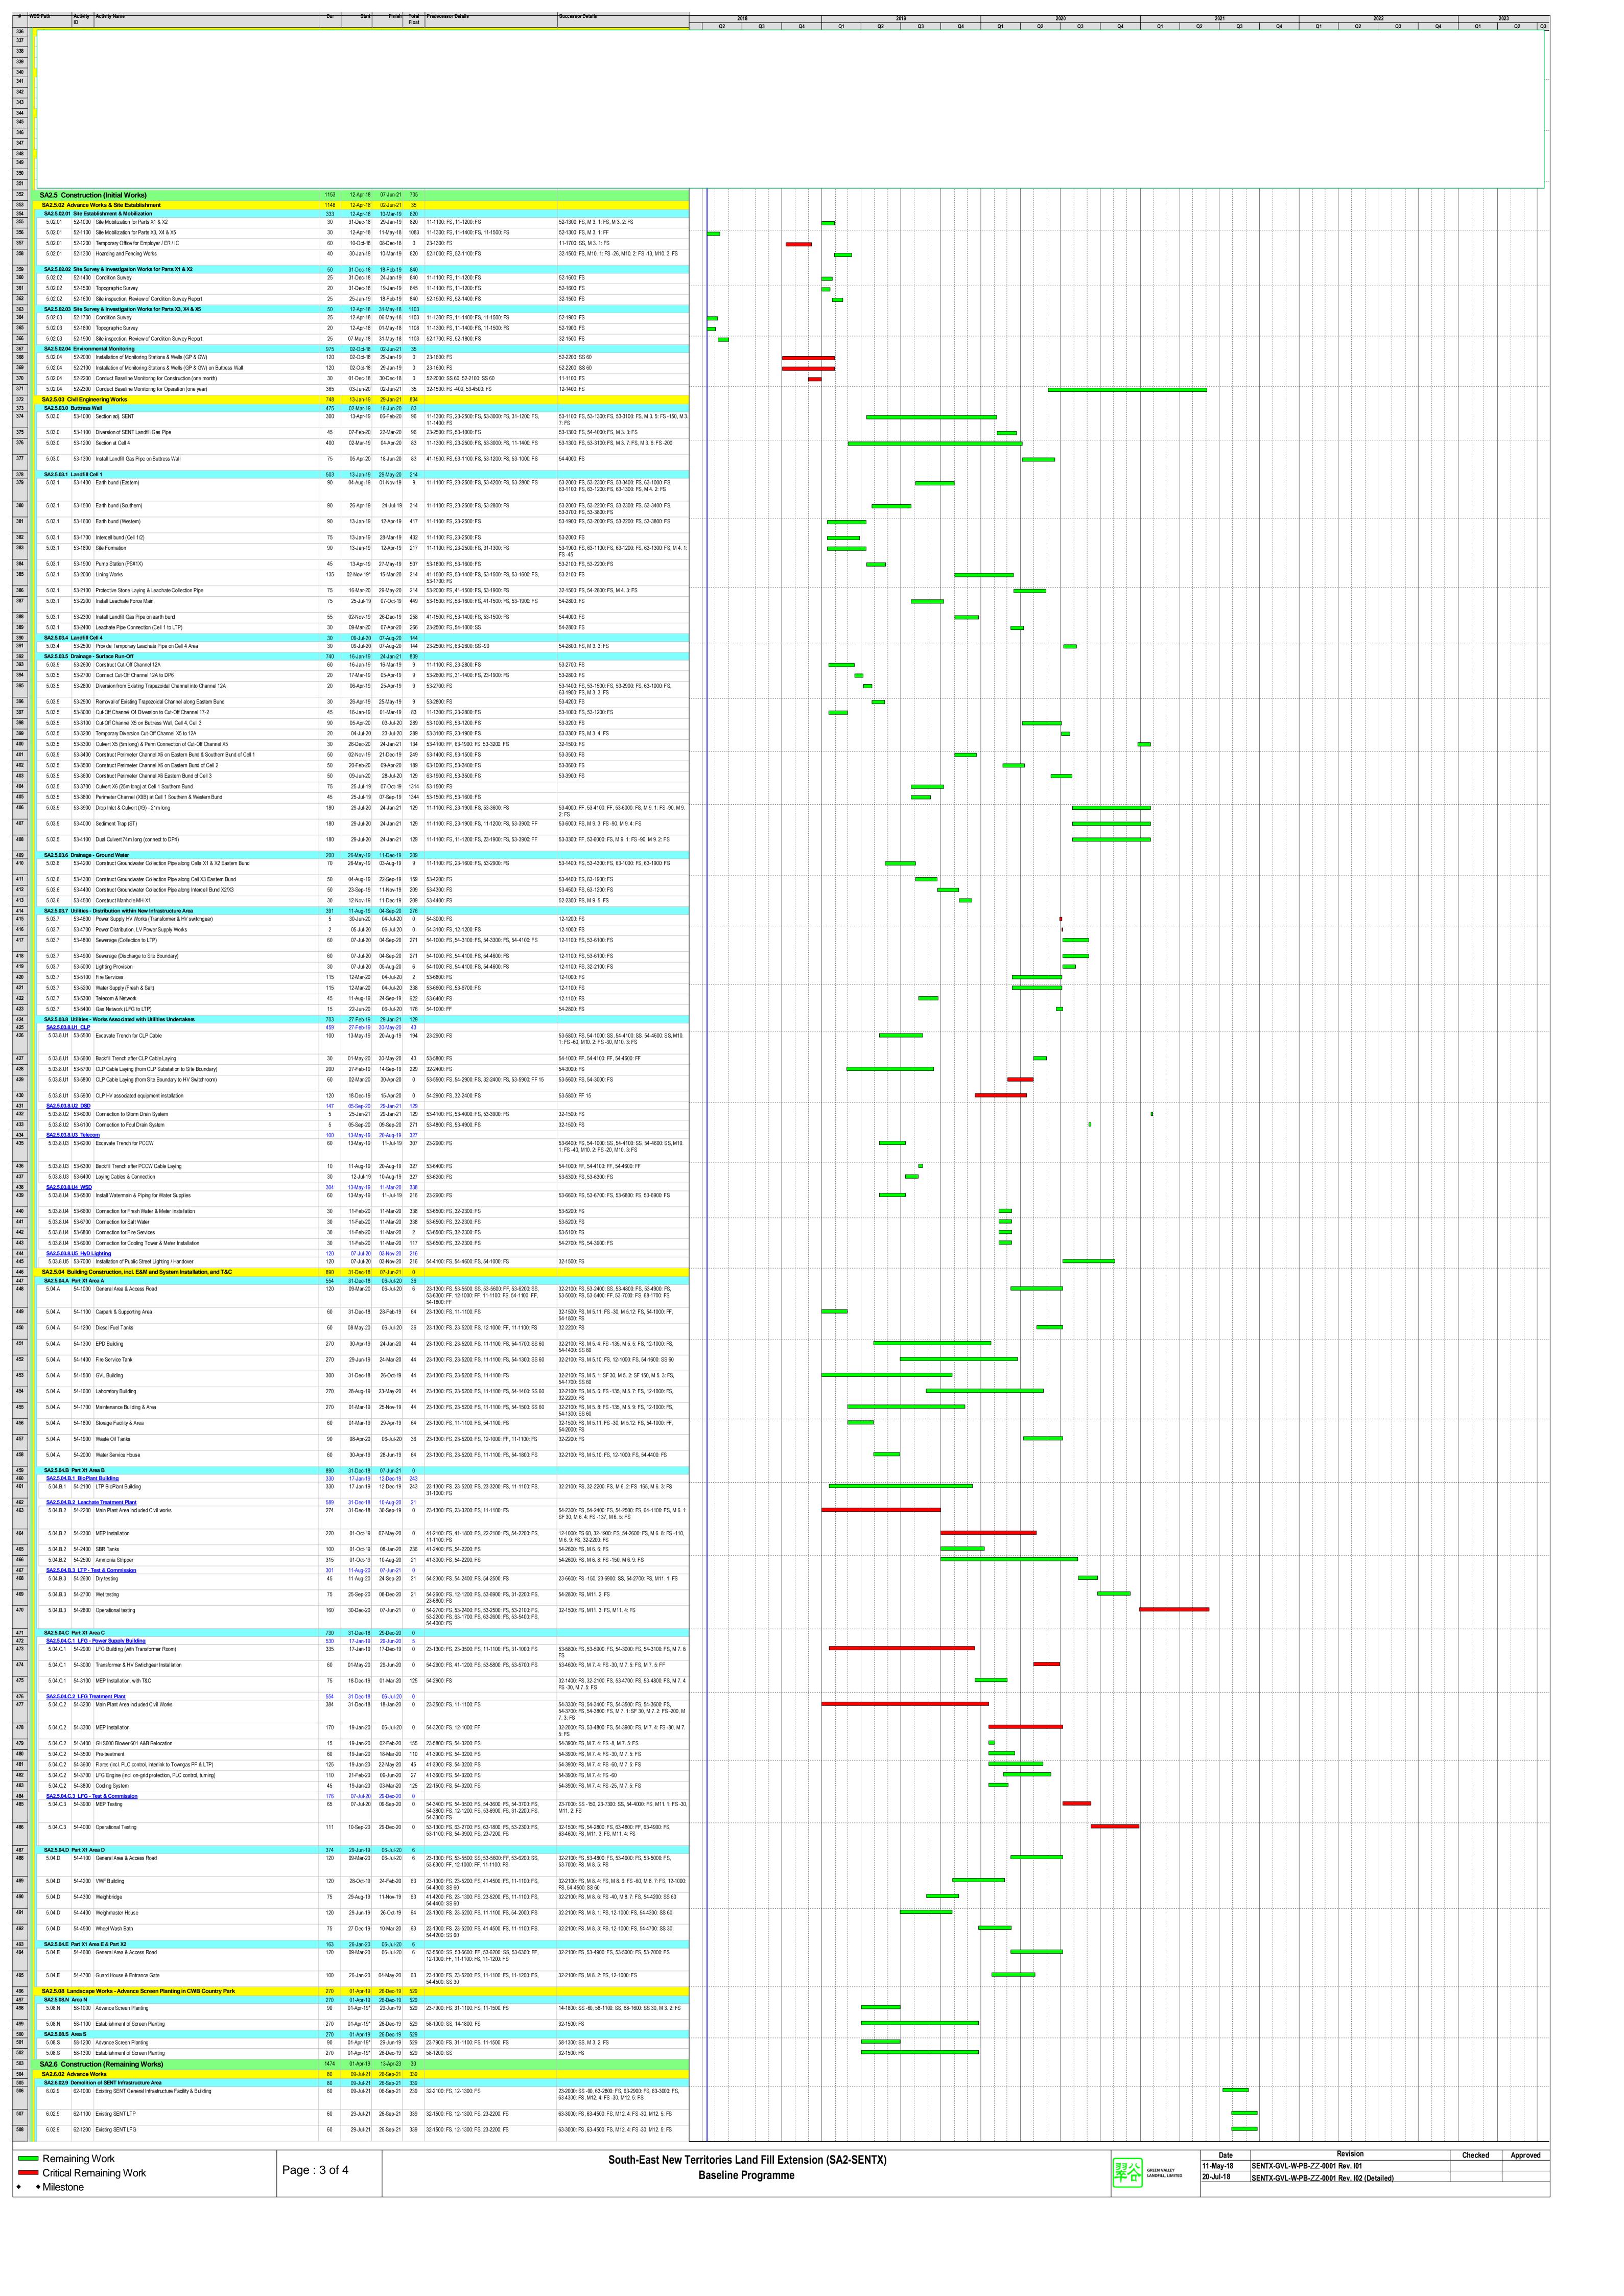

510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553	SA2.6.00 SA2.6.00 6.03.2 6.03.2	 6.03 Civ 6.03.2 La	ID .	Activity Name		_		Total Predecessor Details	Successor Details
510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553	SA2.6.0 3 6.03.2 6.03.2	6.03.2 La	<i>ı</i> il Engir		Dur	Sta		Float	Successor Details
512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553	6.03.2	.2	andfill C	ineering Works Cell 2			19 13-Apr-23 19 23-Jan-21		
513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 550 551 552 553 554 555 566 577 578 578 578 578 578 578 578	6.03.2		63-1000	Earth bund (Eastern)				9 11-1100: FS, 23-2500: FS, 53-4200: FS, 53-1400: FS 53-2800: FS	53-3500: FS, 63-1500: FS, 63-1800: FS, 63-1900: FS, 63-2000: FS, 63-2100: FS, 63-2200: FS, M12. 1: FS -50, M12.
513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 550 551 552 553 554 555 566 577 578 578 578 578 578 578 578	6.03.2							55 25551.5	2: FS, 63-1100: FS
514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553		3.2	63-1100	Earth bund (Western)	110	20-Feb-7	.0 08-Jun-20	84 11-1100: FS, 23-2500: FS, 53-1800: FS, 53-1400: FS	
514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553		5.2	63-1200) Intercell bund (Cell 2/3)	90	09-Jun-	20 06-Sep-20	63-1000: FS 734 11-1100: FS, 23-2500: FS, 53-1800: FS, 53-1400: FS	63-3600: FS, 63-1200: FS 63-1500: FS
515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 566 577 578 578 578 578 578 578 578	6.03.2			,				53-4400: FS, 63-1100: FS	
516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553		5.2	63-1300) Site Formation	/5	02-Nov-1	3 15-Jan-20	14 11-1100: FS, 23-2500: FS, 53-1800: FS, 53-1400: FS	63-1400: FS, 63-4200: FS
517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554				Pump Station (PS#2X)				84 63-1300: FS, 63-1100: FS	63-1600: FS, 63-1700: FS
518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553	6.03.2	5.2	63-1500	D Lining Works	90	01-Oct-20	* 29-Dec-20	710 41-1500: FS, 63-1000: FS, 63-1100: FS, 63-1200: FS	63-1600: FS, M12. 3: FS, 63-2400: FS
519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553				Protective Stone Laying & Leachate Collection Pipe	25	30-Dec-2	.0 23-Jan-21	810 63-1500: FS, 41-1500: FS, 63-1400: FS	32-1600: FS, M12. 3: FS
520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 550 551				O Install Leachate Force Main				84 63-1100: FS, 41-1500: FS, 63-1400: FS	54-2800: FS, M12. 3: FS
521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 550 551				Install Landfill Gas Pipe on earth bund				168 41-1500: FS, 63-1000: FS	54-4000: FS, M12. 3: FS
522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 550 551	SA2.6.0 3			Cell 3 Carth bund (Eastern)			20 02-Feb-22 20 08-Jun-20	9 11-1100: FS, 53-4200: FS, 63-1000: FS, 53-4300: FS	
523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553				. ,				53-2800: FS, 63-4200: FS	FS -50, M12. 2: FS, 63-2000: FS -45, 63-2200: FS
524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553	6.03.3	3.3	63-2000	Earth bund (Western)	110	25-Apr-′	20 12-Aug-20	19 11-1100: FS, 63-1000: FS, 63-1900: FS -45	63-2300: FS, 63-2400: FS, 63-2600: FS, 63-3700: FS,
524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 550 551	0.00.0		00.0400		405		20 44 0 4 00	700 44 4400 50 00 4000 50 00 4000 50 00 0000 50	63-2100: FS -45
525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553	6.03.3	3.3	63-2100	Intercell bund (Cell 3/4)	105	29-Jun-2) 11-Oct-20	789 11-1100: FS, 63-1000: FS, 63-4200: FS, 63-2000: FS	-45 63-2400: FS
526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553	6.03.3	3.3	63-2200	Site Formation	75	09-Jun-?	.0 22-Aug-20	9 11-1100: FS, 63-1000: FS, 63-1900: FS	63-2300: FS
527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553	6.03.3	3.3	63-2300	Pump Station (PS#3X)				9 63-2200: FS, 63-2000: FS	63-2500: FS, 63-2600: FS
528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553	6.03.3	3.3	63-2400	D Lining Works	100	01-Oct-2*	* 08-Jan-22	435 41-1500: FS, 63-1900: FS, 63-2000: FS, 63-2100: FS, 63-1500: FS	63-2500: FS, M12. 3: FS
529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553	6.03.3	3.3	63-2500	Protective Stone Laying & Leachate Collection Pipe	25	09-Jan-	.2 02-Feb-22	435 63-2400: FS, 41-1500: FS, 63-2300: FS	32-1700: FS, M12. 3: FS
530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553	6.03.3	3.3	63-2600	Install Leachate Force Main	75	07-Oct-:	.0 20-Dec-20	9 63-2000: FS, 41-1500: FS, 63-2300: FS	53-2500: SS -90, 54-2800: FS, M12. 3: FS
531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553				Install Landfill Gas Pipe on earth bund	35	09-Jun-2	.0 13-Jul-20	58 41-1500: FS, 63-1900: FS	54-4000: FS, M12. 3: FS
532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553	SA2.6.03			Cell 4 Remaining Portion of Buttress Wall			21 13-Apr-23	30 494 62-1000: FS	
533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553				D Earth bund (Western) incl. MSE Wall				239 62-1000: FS	63-3000: FS, 63-3100: FS, 63-3200: FS, 63-3400: FS,
534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553	0.00.1		00 2000	Editi build (Noticin) inci. inci.	120	0, 000 2	o roun zz	52 1000.10	63-3800: FS, 63-3900: FS, 63-4100: SS -90, M 9. 6: FS -60, M 9. 7: FS -30, M 9. 8: FS
534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553									W 9. 7. FG -50, W 9. 0. FG
535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553	6.03.4	3.4	63-3000) Site Formation	120	05-Jan <i>-2</i>	2 04-May-22	239 62-1000: FS, 62-1100: FS, 62-1200: FS, 63-2900: FS, 63-4100: FS	63-3100: FS
536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553	6.03.4	5.4	63-3100	Pump Station (PS#4X)	45	05-May-	<u>√</u> 2 18-Jun-22	239 63-3000: FS, 63-2900: FS	63-3300: FS, 63-3400: FS
537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553				Lining Works	135	01-Oct-2	2* 12-Feb-23	0 41-1500: FS, 63-2900: FS	63-3300: FS, M12. 6: FS
538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553	6.03.4	3.4	63-3300	Protective Stone Laying & Leachate Collection Pipe	60	13-Feb-/	.3 13-Apr-23	0 41-1500: FS, 63-3200: FS, 63-3100: FS	12-1900: FS, 32-1800: FS, M12. 6: FS
539 540 541 542 543 544 545 546 547 548 549 550 551 552 553	6.03.4	3.4	63-3400	Install Leachate Force Main & Remove Temporary Leachate Pipe	30	19-Jun-∕	.2 18-Jul-22	269 41-1500: FS, 63-2900: FS, 63-3100: FS	12-1900: FS, 32-1800: FS, M12. 6: FS
540 541 542 543 544 545 546 547 548 549 550 551 552 553				e - Surface Run-Off			20 03-Feb-22		(0.000 =0
541 542 543 544 545 546 547 548 549 550 551 552 553				Perimeter Channel (X9A) at Cell 2 Western Bund				1054 63-1100: FS	12-1900: FS
542 543 544 545 546 547 548 549 550 551 552 553				Perimeter Channel (X10A) at Cell 2 Western Bund Perimeter Channel (X10A) at Cell 3 Western Bund				1029 63-1100: FS 964 63-2000: FS	63-4000: FS 63-4000: FS
543 544 545 546 547 548 549 550 551 552 553				Perimeter Channel (X10A) at Cell 3 Western Bund Perimeter Channel (X10A) at Cell 4 Western Bund				464 63-2900: FS	63-4000: FS 63-4000: FS
544 545 546 547 548 549 550 551 552 553				Perimeter Channel (X10C) at Cell 4 Western Bund				469 63-2900: FS	63-4000: FS
545 546 547 548 549 550 551 552 553				Connection to Existing DP3				464 63-3900: FS, 63-3600: FS, 63-3700: FS, 63-3800: FS	
546 547 548 549 550 551 552 553	0.00.5		00.4400		00	00.1	24 00 1 104	440, 00,0000, 00,00	20,000, 50
547 548 549 550 551 552 553				Remove Cut-Off Channel C-7 at bottom of Buttress Wall				419 63-2900: SS -90	63-3000: FS
548 549 550 551 552 553				Temporary Channel (X7T) at SENT Infrastructure Area e - Ground Water			20 14-Feb-20 21 30-Nov-21	14 63-1300: FS	63-1900: FS, 63-2100: FS
550 551 552 553			_	Construct Temporary Channel (TC-1), from MH-1 to Existing UC-825				529 23-1900: FS, 11-1300: FS, 62-1000: FS	63-4400: FS
551 552 553	6.03.6	6.6	63-4400	Divert GW at MH-1 to TC-1	5	27-Oct-7	.1 31-Oct-21	529 63-4300: FS	63-4500: FS, M 9. 9: FS
552 553				Reconnection of GWCP across Cell 4				529 62-1100: FS, 62-1200: FS, 63-4400: FS	12-1900: FS
553				- Works Associated with Utilities Undertakers			20 27-Jul-21		
		3.8.U1 6		LFG Generator On-grid Testing			20 27-Jul-21 20 27-Jun-21	655 32-2500: FS, 12-1200: FS, 54-4000: FS	63-4700: FS
007				LFG Generator On-grid Inspection & Verify				655 63-4600: FS	12-1900: FS
		2.6.03.8.U					08-Jan-21		00.4000.50
				Laying Gas Mains (from LFG to Town Gas PF) Gas Meter Relocation & Connection at LFG				855 54-4000: FF 855 63-4800: FS, 54-4000: FS	63-4900: FS 12-1900: FS
				Gas Meter Relocation & Connection at LFG & E&M Works			19 22-Jul-21	· ·	12-1900. FO
559	SA2.6.0	6.04.C P	art X1 A	Area C	661	01-Oct-1	19 22-Jul-21	660	
560	SA2.6.0	.6.04.C.0	2 LFG	Treatment Plant	661	01-Oct-1	19 22-Jul-21	660	12 1000: EC
				O GHS600 Blower 601 C Relocation O Absorption Chiller (Optional)				660 32-1500: FS 1231 54-2200: FS	12-1900: FS 12-1900: FS
				pe Works			19 29-Dec-19 19 03-Dec-20		12-1000.10
564	SA2.6.0	6.08.1 SI	ENT Are	rea - Tree Removal & Transplanting	240	01-Apr-1	19 26-Nov-19	1264	
	-			Access trees condition and select for transplanting				1264 14-1300: FS	68-1100: FS, 68-1200: FS, 68-1400: FS
				Prepare new site to receive trees				1264 68-1000: FS	68-1200: SS
	6.08.1			Transplant selected trees				1264 68-1000: FS, 68-1100: SS	68-1300: FS
	6.08.1 6.08.1			Prune trees prior to removal from Cell 4 Tree Felling - Part X3				1264 68-1200: FS 1384 23-8200: FS, 31-1600: FS, 68-1000: FS	12-1900: FS 12-1900: FS
	6.08.1 6.08.1 6.08.1			Tree Felling - Part X3 Area - Trial Nursery & Tree Planting			19 29-Jul-19 19 03-Dec-20		12-1300. FS
	6.08.1 6.08.1 6.08.1 6.08.1	J.JU.K 0		Trial Nursery				1174 14-1800: FS, 58-1000: SS 30	12-1900: FS, M 3. 2: FS
572	6.08.1 6.08.1 6.08.1 6.08.1 SA2.6.0		00 1000	Landscaping in New Infrastructure Area	150	07-Jul-	20 03 Dec 20	891 54-1000: FS, 23-7600: FS	12-1900: FS

Annex B

Environmental Mitigation Implementation Schedule

Annex B Environmental Mitigation Implementation Schedule

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	the m	neasu	mplement re? ⁽¹⁾ O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
Air Quali	ty - Cons	truction Phase								
4.8.1	AQ1	Blasting	To minimise potential	_	SENTX		✓		Air Pollution Control (Construction Dust) Regulations	Not applicable. Blasting is not required in the latest landfill design
		• The area within 30m of the blasting area will be wetted prior to blasting.	dust nuisance	and 30m of blasting area	Contractor					
		 Blasting will not be carried out when the strong wind signal or tropical cyclone warning signal No. 3 or higher is hoisted, unless this is with the express prior permission of the Commissioner of Mines. 								
		 loose material and stones in the Site will be removed prior to the blast operation 								
		 During blasting, blast nets, screens and other protective covers will be used to prevent the projection of flying fragments and material resulting from blasting 								
4.8.1	AQ2	Rock Drilling	To minimise potential	Rock drilling	SENTX		✓		Air Pollution Control	Not applicable. Rock
		 Watering will be carried out at the rock drilling activities to avoid fugitive dust emissions. 	dust nuisance a	area	Contractor				(Construction Dust) Regulations	drilling is not required in the latest landfill design
(1) D=Desig	gn; C=Const	ruction; O/R=Operation/Restoration; A=Aftercare								

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended	Location of the Measures	Who to implement	the	meas	implement sure? (1)	What requirements or standards for the	Implementation Status and Remarks	
			Measure & Main Concerns to address		the measure?	D	С	O/R A	measure to achieve?		
4.8.1	AQ3	Site Access Road	To minimise potential		SENTX		✓		Air Pollution Control	Reminder was given to	
		 The main haul road will be kept clear of dusty materials or sprayed with water. 	dust nuisance	road	Contractor				(Construction Dust) Regulations	Contractor	
		The main haul road will be paved							HKAQO and EIAO- TM Annex 4		
		with aggregate or gravel.									
		• Vehicle speed will be limited to 10kph.									
4.8.1	AQ4	Stockpiling of Dusty Materials	To minimise potential	All	SENTX		✓		Air Pollution Control	Deficiency of	
		Any stockpile of dusty materials will be covered entirely by impervious	dust nuisance	construction works area	Contractor				(Construction Dust) Regulations	mitigation measures but rectified by the Contractor	
		sheeting or placed in an area sheltered on the top and three sides or sprayed with water so as to ensure that the entire surface is wet.							HKAQO and EIAO- TM Annex 4		
4.8.1	AQ5	<u>Loading</u> , <u>unloading</u> or transfer of dusty <u>materials</u>	To minimise potential All dust nuisance construction works area	construction	SENTX Contractor		✓		Air Pollution Control (Construction Dust)	Deficiency of mitigation measures	
		All dusty materials will be sprayed						Regulations	but rectified by the Contractor		
		with water immediately prior to any loading, unloading or transfer operation so as to maintain the dusty material wet.							HKAQO and EIAO- TM Annex 4		
4.8.1	AQ6	Site Boundary and Entrance	To minimise potential	Site boundary	SENTX		✓		Air Pollution Control	Implemented	
		Where a site boundary adjoins a road, street, service lane or other area	dust nuisance	and entrance	Contractor				(Construction Dust) Regulations		
		accessible to the public, hoarding of height not less than 2.4m from							HKAQO and EIAO-		

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implem the measure? (1) D C O/R		What requirements or standards for the measure to achieve?	Implementation Status and Remarks
		ground level will be provided along the entire length of that portion of the site boundary except for the site entrance or exit.						TM Annex 4	
4.8.1	AQ7	Excavation Works	To minimise potential dust nuisance	All construction works area	SENTX Contractor	✓		Air Pollution Control	Not applicable
		 Working area of any excavation or earth moving operation will be sprayed with water immediately before, during and immediately after the operation so as to ensure that the entire surface is wet. 						(Construction Dust) Regulations HKAQO and EIAO- TM Annex 4	
4.8.1	AQ8	Building Demolition	duet nuicance	All construction works area	SENTX Contractor	✓		Air Pollution Control	Not applicable
		• The area where the demolition works are planned to take place will be sprayed with water immediately prior to, during and immediately after the demolition activities.						(Construction Dust) Regulations HKAQO and EIAO- TM Annex 4	
		 Any dusty materials remaining after a stockpile is removed will be wetted with water and cleared from the surface of roads or street. 							
4.8.1	AQ9	 Construction of the Superstructure of Building Effective dust screens, sheeting or netting will be provided to enclose the scaffolding from the ground level up to the highest level of the scaffolding. 	To minimise potential dust nuisance	All construction works area	SENTX Contractor	✓		Air Pollution Control (Construction Dust) Regulations HKAQO and EIAO- TM Annex 4	Implemented

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended	Location of the Measures	Who to implement			impler sure? ⁽¹⁾		What requirements or standards for the	Implementation Status and Remarks
			Measure & Main Concerns to address		the measure?	D	С	O/R	A	measure to achieve?	
4.8.1	AQ10	Should a stone crushing plant be needed on site, the control measures recommended in the <i>Best Practicable Means Requirement for Mineral Works</i> (<i>Stone Crushing Plants</i>) <i>BPM 11/1</i> should be implemented.	To minimise potential dust nuisance	Stone crushing plant/ construction phase	SENTX Contractor		✓			Best Practicable Means Requirement for Mineral Works (Stone Crushing Plants) BPM 11/1	Not applicable. Stone crushing plant is not required in the latest landfill design
4.8.1	AQ11	Good site practices such as regular maintenance and checking of the diesel powered mechanical equipment will be adopted to avoid any black smoke emissions and to minimize gaseous emissions.	To minimise potential dust nuisance	All construction works area	SENTX Contractor		√			HKAQO and EIAO- TM Annex 4	Implemented
4.10.1	AQ12	Dust monitoring once every 6 days	Ensure the dust generated from the project meets the air quality requirement	At monitoring locations shown in <i>Figure 3.2a</i>	SENTX Contractor		✓			HKAQO and EIAO- TM Annex 4	Implemented
4.10.2	AQ41	Monitoring of ambient TSP once every 6 days	Ensure the dust emission from the project meets the dust requirement	At monitoring locations shown in Figure 11.3a	SENTX Contractor		✓	✓		HKAQO and EIAO- TM Annex 4	Implemented
4.10.2	AQ46	Monitoring of meteorological station, continuously	Collect site specific meteorological data	At meteorologica l station shown in Figure 11.3a	SENTX Contractor		✓	✓	✓	-	Implemented

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Recommended the Measures	Who to implement			implemo ure? ⁽¹⁾	or standards for the	What requirements or standards for the	Implementation Status and Remarks	
			Measure & Main Concerns to address	V2.0 1/2 0 40 0 20	the measure?	D	С	O/R	A	measure to achieve?	3 11 1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
5.7.1	N1	 Adopt good site practice listed below: Only well-maintained plant will be operated on-site and plant should be serviced regularly during the 	To minimise potential construction noise nuisance.	All construction works area	SENTX Contractor		✓			Noise Control Ordinance (NCO) and EIAO-TM Annex 5	Implemented
		construction program;									
		 Silencers or mufflers on construction equipment should be utilized and will be properly maintained during the construction program; 									
		• Mobile plant, if any, will be sited as far from NSRs as possible;									
		 Machines and plant (such as trucks) that may be in intermittent use will be shut down between work periods or should be throttled down to a minimum; 									
		Plant known to emit noise strongly in one direction will, wherever possible, be orientated so that the noise is directed away from the nearby NSRs; and	,								
		 Material stockpiles and other structures will be effectively utilised, wherever practicable, in screening noise from on-site construction activities. 									

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended	Location of the Measures	Who to implement			implement sure? (1)	What requirements or standards for the	Implementation Status and Remarks
			Measure & Main Concerns to address		the measure?	D	С	O/R A	measure to achieve?	
5.8	N2	Weekly noise monitoring	Ensure noise generated from the project meets the criteria	At monitoring locations shown in Figure 6.4a	SENTX Contractor		✓		Noise Control Ordinance (NCO) and EIAO-TM Annex 5	Implemented
Water Qua	ality - Co	nstruction Phase								
6.8.1	WQ1	Construction Runoff								
		• Exposed soil areas will be minimised	To minimise potential		SENTX		✓		ProPECC PN 1/94	Deficiency of
		to reduce the contamination of runoff and erosion.	water quality impacts arising from the construction works	construction works area	Contractor				EIAO-TM Annex 6	mitigation measures but rectified by the Contractor
6.8.1	WQ2	Perimeter channels will be	To minimise potential		SENTX	✓	✓		ProPECC PN 1/94	Reminder was given to
		constructed in advance of site formation works and earthworks and intercepting channels will be provided	water quality impacts arising from the construction works	construction works area	Contractor				Water Pollution Control Ordinance (WPCO)	Contractor
		for example along the edge of excavation.							EIAO-TM Annex 6	
6.8.1	WQ3	Silt removal facilities, channels and	To minimise potential		SENTX		✓		ProPECC PN 1/94	Deficiency of
		manholes will be maintained and the deposited silt and grit should be	water quality impacts arising from the	construction works area	Contractor				WPCO	mitigation measures but rectified by the
		removed regularly to ensure they are functioning properly at all times.	construction works	works area					EIAO-TM Annex 6	Contractor
6.8.1	WQ4	Temporary covers such as tarpaulin	To minimise potential		SENTX		✓		ProPECC PN 1/94	Implemented
		will also be provided to minimise the generation of high SS runoff.	water quality impacts arising from the construction works	construction works area	Contractor				WPCO	
6.8.1	WQ5	The surface runoff contained any oil	To minimise potential	All	SENTX		✓		ProPECC PN 1/94	Not applicable

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended	Location of the Measures	Who to implement			implement ure? ⁽¹⁾	What requirements or standards for the	Implementation Status and Remarks
			Measure & Main Concerns to address		the measure?	D	C	O/R A	measure to achieve?	
		and grease will pass through the oil	water quality impacts	construction	Contractor				WPCO	
		interceptors.	arising from the construction works	works area					EIAO-TM Annex 6	
6.8.1	WQ6	• All sewer and drains will be sealed to	To minimise potential				✓		ProPECC PN 1/94	Not applicable
		prevent building debris, soil etc from entering public sewers/drains before	water quality impacts arising from the	area at existing SENT	Contractor				WPCO	
		commencing any demolition works	demolition works	Landfill					EIAO-TM Annex 6	
6.8.1	WQ7	During the excavation works for the	To minimise potential	Tunnel boring	SENTX		✓		ProPECC PN 1/94	Not applicable.
		twin drainage tunnels, the recycle water for cooling the cutter head of	water quality impacts arising from the	sites	Contractor				WPCO	Excavation of drainage tunnels is not required
		the TBM will be conveyed to the sedimentation tanks for treatment and most of the treated water will be reused, where applicable and as much as possible, in the boring operations.	tunnel works						EIAO-TM Annex 6	in the latest landfill design.
6.8.1	WQ8	• The fuel and waste lubricant oil from	To minimise potential	SENTX Site	SENTX		✓		ProPECC PN 1/94	Implemented
		the on-site maintenance of machinery and equipment will be collected by a	water quality impacts arising from improper		Contractor				WPCO	
		licensed chemical waste collector.	handling of fuel and oil						Waste Disposal Ordinance (WDO)	
6.8.1	WQ9	Implementation of excavation	To minimise	All	SENTX		✓		ProPECC PN 1/94	Implemented
		schedules, lining and covering of excavated stockpiles	contaminated stormwater run-off	construction works	Contractor				WPCO	
		excavated stockpiles	from the SENTX Site	WOIKS					EIAO-TM Annex 6	
6.13	WQ10	Monitoring of surface water quality	To minimise potential	SENTX Site	SENTX		✓		WPCO	Implemented
		will be conducted on a regular basis as stated in the EM&A Manual.	water quality impacts on surface water arising from the construction works		Contractor				Water-TM	

EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended	Location of the Measures	Who to implement	the	meas	ure? (1)	What requirements or standards for the	Implementation Status and Remarks
		Concerns to address		the measure?	D	C	O/R A	measure to achieve?	
WQ11	Sewage Effluents								
	• Sufficient chemical toilets will be provided for the construction workforce.	To minimise potential water quality impacts arising from the sewage effluents	SENTX Site	SENTX Contractor		✓		WPCO	Implemented
WQ12		_	SENTX Site	SENTX		✓		WPCO	Reminder was given to
	to discharge into the surrounding water body.	water quality impacts arising from the sewage effluents		Contractor				WDO	the Contractor
WQ13	A licensed waste collector will be	-	SENTX Site	SENTX		✓		WPCO	Implemented
	employed to clean the chemical toilets on a regular basis.	water quality impacts arising from the sewage effluents		Contractor				WDO	
ınagement	- Construction Phase								
WM1	All the necessary waste disposal permits are obtained prior to the commencement of construction work.	To ensure compliance with relevant statutory requirements	Before construction works commence	SENTX Contractor	✓	✓		WDO	Implemented
WM2	Management of Waste Disposal								
	The construction contractor will open a	To ensure that	SENTX Site	SENTX		✓		WDO	Implemented
	construction waste or public fill load to be transferred to the Government waste disposal facilities such as public fill	environmental impacts are prevented		Contractor				Waste Disposal (Charges for Disposal of Construction Waste) Regulation;	
	landfills will required a valid "chit" which contains the information of the account holder to facilitate waste							Works Bureau Technical Circular No.31/2004; and	
	Ref WQ11 WQ12 WQ13	WQ11 Sewage Effluents • Sufficient chemical toilets will be provided for the construction workforce. WQ12 • Untreated sewage will not be allowed to discharge into the surrounding water body. WQ13 • A licensed waste collector will be employed to clean the chemical toilets on a regular basis. MAD All the necessary waste disposal permits are obtained prior to the commencement of construction work. WM2 Management of Waste Disposal The construction contractor will open a billing account with the EPD. Every construction waste or public fill load to be transferred to the Government waste disposal facilities, sorting facilities, landfills will required a valid "chit" which contains the information of the	Ref Mitigation Measures Recommended Measure & Main Concerns to address WQ11 Sewage Effluents • Sufficient chemical toilets will be provided for the construction workforce. WQ12 • Untreated sewage will not be allowed to discharge into the surrounding water body. WQ13 • A licensed waste collector will be employed to clean the chemical toilets on a regular basis. WM1 All the necessary waste disposal permits are obtained prior to the commencement of construction work. WM2 Management of Waste Disposal The construction vill open a billing account with the EPD. Every construction waste or public fill load to be transferred to the Government waste disposal facilities such as public fill reception facilities, sorting facilities, landfills will required a valid "chit" which contains the information of the	Ref Mitigation Measures Recommended Measure & Main Concerns to address WQ11 Sewage Effluents Sufficient chemical toilets will be provided for the construction workforce. WQ12 Untreated sewage will not be allowed to discharge into the surrounding water body. WQ13 A licensed waste collector will be employed to clean the chemical toilets on a regular basis. WM1 All the necessary waste disposal permits are obtained prior to the commencement of construction work. WM2 Management of Waste Disposal The construction waste or public fill load to be transferred to the Government waste disposal facilities, sorting facilities, landfills will required a valid "chit" which contains the information of the sewage effluents Recommended Measure & Main Concerns to address To minimise potential water quality impacts arising from the sewage effluents To minimise potential water quality impacts arising from the sewage effluents To minimise potential water quality impacts arising from the sewage effluents To minimise potential water quality impacts arising from the sewage effluents To minimise potential water quality impacts arising from the sewage effluents To minimise potential water quality impacts arising from the sewage effluents To minimise potential water quality impacts arising from the sewage effluents To ensure compliance with relevant statutory requirements To ensure that adverse environmental impacts are prevented impacts are prevented disposal facilities, sorting facilities, landfills will required a valid "chit" which contains the information of the sewage effluents	Ref Mitigation Measures Recommended Measure & Main Concerns to address the Measures implement the measure? WQ11 Sewage Effluents * Sufficient chemical toilets will be provided for the construction workforce. To minimise potential water quality impacts arising from the sewage effluents SENTX Site Valentation of the sewage effluents SENTX Site water quality impacts arising from the sewage effluents SENTX Site water quality impacts arising from the sewage effluents SENTX Site water quality impacts arising from the sewage effluents SENTX Site water quality impacts arising from the sewage effluents SENTX Site water quality impacts arising from the sewage effluents SENTX Site water quality impacts arising from the sewage effluents SENTX Site water quality impacts arising from the sewage effluents SENTX Site water quality impacts arising from the sewage effluents SENTX Site water quality impacts arising from the sewage effluents SENTX Site water quality impacts arising from the sewage effluents SENTX Site water quality impacts arising from the sewage effluents SENTX Site water quality impacts arising from the sewage effluents SENTX Site water quality impacts arising from the sewage effluents SENTX Site water quality impacts arising from the sewage effluents SENTX Site water quality impacts arising from the sewage effluents SENTX Site water quality impacts arising from the sewage effluents SENTX Site water quality impacts arising from the sewage effluents SENTX Site water quality impacts arising from the sewage effluents SENTX	Ref Mitigation Measures Recommended Measure & Main Concerns to address WQ11 Sewage Effluents Sufficient chemical toilets will be provided for the construction workforce. WQ12 Sufficient deswage will not be allowed to discharge into the surrounding water body. WQ13 A licensed waste collector will be employed to clean the chemical toilets on a regular basis. WM11 All the necessary waste disposal permits are obtained prior to the commencement of construction work. WM12 All the necessary waste disposal permits are obtained prior to the commencement of construction work. WM2 Management of Waste Disposal The construction waste or public fill load to be transferred to the Government waste disposal facilities, sorting facilities, landfills will required a valid "chit" which contains the information of the with address are defined.	Ref Mitigation Measures Recommended Measures Main Concerns to address WQ11 Sewage Effluents • Sufficient chemical toilets will be provided for the construction workforce. WQ12 • Untreated sewage will not be allowed to discharge into the surrounding water body. WQ13 • A licensed waste collector will be employed to clean the chemical toilets on a regular basis. WQ14 All the necessary waste disposal permits are obtained prior to the commencement of construction work. WM1 All the necessary waste disposal permits are obtained prior to the commencement of construction work. WM2 Management of Waste Disposal The construction contractor will open a billing account with the EPD. Every construction waste or public fill reception facilities, landfills will required a valid "chit" which contains the information of the commence on the transferred to the Government waste disposal facilities such as public fill reception facilities, landfills will required a valid "chit" which contains the information of the commence of the commen	Recommended Recommended Recommended Recommended Resures & Main Reasures & Main Recommended Recommended	Medical Measures Recommended Measure & Main Concerns to address Sentra Service Sentra Sentra Service Sentra Service

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?		to implemer asure? ⁽¹⁾ O/R A	or standards for the	Implementation Status and Remarks
		transaction recording and billing to the waste producer. A trip-ticket system will also be established to monitor the disposal of construction waste at the SENT Landfill and to control fly-tipping. The trip-ticket system will be included as one of the contractual requirements and implemented by the contractor.						Annex 5 and Annex 6 of Appendix G of ETWBTC No. 19/2005)	
		A recording system for the amount of waste generated, recycled and disposed of (including the disposal sites) will be established.							
7.6.1	WM3	Measures for the Reduction of Construction Waste Generation							
		Inert and non-inert construction waste will be segregated and stored in different containers or skips to facilitate reuse or recycling of the inert waste and proper disposal of the non-inert construction waste. Specific areas of the work site will be designated for such segregation and storage if immediate use is not practicable.	To reduce construction waste generation	SENTX Site	SENTX Contractor	✓		WDO EIAO-TM Annex 7	Deficiency of mitigation measures but rectified by the Contractor
7.6.1	WM4	<u>Chemical Waste</u>						N.T. O	
		The construction contractor will register as a chemical waste producer with the EPD. Chemical waste will be handled in accordance with the <i>Code of Practice on the Packaging, Handling and Storage of</i>	To ensure proper handling of chemical waste	SENTX Site	SENTX Contractor	✓		WDO Code of Practice on the Packaging, Handling and Storage of Chemical Wastes	Deficiency of mitigation measures but rectified by the Contractor

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	the n		implement ure? ⁽¹⁾ O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
		Chemical Wastes.								
7.6.1	WM5	<u>Sewage</u>								
		An adequate number of portable toilets will be provided at the site to ensure that sewage from site staff is properly collected. The portable toilets will be desludged and maintained regularly by a specialist contractor.	To ensure proper handling of sewage	SENTX Site	SENTX Contractor		✓		WDO EIAO-TM Annex 7	Implemented
7.6.1 and	WM6	General Refuse								
SENTX latest design		General refuse will be stored in enclosed bins separately from construction and chemical wastes. The general refuse will be delivered to a transfer station or other landfill, separately from construction and chemical wastes, on a daily basis to reduce odour, pest and litter impacts.	To ensure proper handling of general refuse	SENTX Site	SENTX Contractor		✓		WDO EIAO-TM Annex 7	Deficiency of mitigation measures but rectified by the Contractor
		Recycling bins will be provided at strategic locations to facilitate recovery of aluminium can and waste paper from the SENTX Site. Materials recovered will be sold for recycling.								
7.6.1	WM7	Staff Training								
		At the commencement of the construction works, training will be provided to workers on the concepts of site cleanliness and on appropriate waste management procedures, including	To ensure that adverse environmental impacts are prevented	SENTX Site	SENTX Contractor		√			Implemented

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	the n	neas	implement ure? ⁽¹⁾ O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
		waste reduction, reuse and recycling.								
7.8	WM8	Environmental Monitoring & Audit Requirements Weekly audits of the waste management practices will be carried out during the construction phase. The audits examine all aspects of waste management including waste generation, storage, recycling, transport and disposal.	To ensure that adverse environmental impacts are prevented	SENTX Site	SENTX Contractor		✓		WDO	Implemented
Landfill G	as Hazar	ds - Design and Construction Phase								
8.6.2 and SENTX latest design	LFG1	Precautionary measures to be adopted by the contractors at the Project site and the adjacent development site within the landfill consultation zone are outlined in Paragraphs 8.3 to 8.49 of EPD's Landfill Gas Hazard Assessment Guidance Notes (the Guidance Note). Those precautionary measures applicable to the SENTX will be confirmed in the detailed Qualitative Landfill Gas Hazard Assessment to be submitted by the contractor.	-	All construction works area	SENTX Contractor		✓		Paragraphs 8.3 to 8.49 of EPD's Landfill Gas Hazards Assessment Guidance Note EIAO-TM Annex 7	Implemented
8.6.2	LFG2	Monitoring will be undertaken when construction works are carried out in confined space within the consultation zone with reference to the monitoring requirements and procedures specified in Paragraphs 8.23 to 8.28 of EPD's <i>Guidance Note</i> will be followed.	To protect workers from landfill gas risk	Confined space within the construction works area	SENTX Contractor		✓			Not applicable

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended	Location of the Measures	Who to implement			implei sure? (1)		What requirements or standards for the	Implementation Status and Remarks
			Measure & Main Concerns to address		the measure?	D	С	O/R	A	measure to achieve?	
		In the event of the trigger levels being exceeded, it is recommended that a person, such as the Safety Officer, is nominated, with deputies, to be responsible for dealing with any emergency which may occur due to landfill gas. In an emergency situation, the nominated person, or his deputies, shall have the necessary authority and shall ensure that the confined space is evacuated and the necessary works implemented for reducing the concentrations of gas. The appropriate organisations shall be contact.									
8.6.3	LFG4	Implementation of engineering measures according to Contract Specification requirements. These measures will include the placement of liner and installation of landfill gas management system to contain, manage and control landfill gas.	To protect workers from landfill gas risk	SENTX Site	SENTX Contractor	✓	✓	✓	✓	EIAO-TM Annex 7	Implemented
8.6.3	LFG5	Engineering measures to significant engineering measures will be required in the design of the SENTX to protect the staff working in the infrastructure area. These measures include a combination of passive and active systems (examples are recommended in EPD's <i>Guidance Notes</i>). Landfill gas monitoring boreholes will be installed at the edge of the waste slope	Ü	Infrastructure Area	SENTX Contractor	√	✓			EPD's Landfill Gas Hazards Assessment Guidance Note EIAO-TM Annex 7	Not applicable

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?		o implement isure? (1) O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
		between the waste and the new infrastructure area to monitor the migration of landfill gas, if any.							
Ecology -	Construc	tion Phase							
9.10.2	EC1	 Exposed soil areas will be minimised to reduce the contamination of runoff and erosion; To prevent stormwater runoff from washing across exposed soil surfaces, perimeter channels will be constructed in advance of site formation works and earthworks and intercepting channels will be provided for example along the 	To minimise potential water quality impacts affecting ecological resources	All construction works area	SENTX Contractor	•		EIAO-TM Annex 16 ProPECC PN 1/94 Water Pollution Control Ordinance (WPCO) EIAO-TM Annex 6	Deficiency of mitigation measures but rectified by the Contractor Reminder was given to Contractor
		 edge of excavation; Silt removal facilities, channels and manholes will be maintained and the deposited silt and grit will be removed regularly to ensure they are functioning properly at all times; Temporary covers such as tarpaulin will also be provided to minimise the generation of high suspended solids runoff; 						-	Deficiency of mitigation measures but rectified by the Contractor

		Objectives of the	Location of the Measures	Who to	t the measure? (1)				or standards for the	Implementation Status and Remarks
		Measure & Main Concerns to address		the measure?					measure to achieve?	
	 The surface runoff contained any oil and grease will pass through the oil interceptors; and, 								-	Not applicable
	 Control measures, including implementation of excavation schedules, lining and covering of excavated stockpiles will be implemented to minimise contaminated stormwater run-off from the SENTX site. 								-	Implemented
EC2	Good Construction Practice:									
	 Fences along the boundary of the SENTX Site will be erected before the commencement of works to prevent vehicle movements, and encroachment of personnel, onto adjacent areas. 	To minimise potential ecological impacts arising from the Project	SENTX Site	SENTX Contractor		√			EIAO-TM Annex 16	Implemented
	 The work site boundaries will be regularly checked to ensure that they are not breached and that damage does not occur to surrounding areas. 									
EC9	Environmental Monitoring & Audit Requirements	m	CENTEN.	CEN VIIV		,	,	,	FIAO TM A 16	
	The implementation of the ecological mitigation measures should be checked as part of the environmental monitoring and audit procedures during the	To ensure that adverse ecological impacts are prevented	SEN1X	SENTX Contractor		•	V	V	EIAU-1NI Annex 16	Implemented
	Ref EC2	The surface runoff contained any oil and grease will pass through the oil interceptors; and, Control measures, including implementation of excavation schedules, lining and covering of excavated stockpiles will be implemented to minimise contaminated stormwater run-off from the SENTX site. EC2 Good Construction Practice: Fences along the boundary of the SENTX Site will be erected before the commencement of works to prevent vehicle movements, and encroachment of personnel, onto adjacent areas. The work site boundaries will be regularly checked to ensure that they are not breached and that damage does not occur to surrounding areas. EC9 Environmental Monitoring & Audit Requirements The implementation of the ecological mitigation measures should be checked as part of the environmental monitoring	Ref Mitigation Measures Procedure & Main Concerns to address The surface runoff contained any oil and grease will pass through the oil interceptors; and, Control measures, including implementation of excavation schedules, lining and covering of excavated stockpiles will be implemented to minimise contaminated stormwater run-off from the SENTX site. Fec2 Good Construction Practice: Fences along the boundary of the SENTX Site will be erected before the commencement of works to prevent vehicle movements, and encroachment of personnel, onto adjacent areas. The work site boundaries will be regularly checked to ensure that they are not breached and that damage does not occur to surrounding areas. EC9 Environmental Monitoring & Audit Requirements The implementation of the ecological mitigation measures should be checked as part of the environmental monitoring	Ref Mitigation Measures Recommended Measure & Main Concerns to address * The surface runoff contained any oil and grease will pass through the oil interceptors; and, * Control measures, including implementation of excavation schedules, lining and covering of excavated stockpiles will be implemented to minimise contaminated stormwater run-off from the SENTX site. ** Fences along the boundary of the SENTX Site will be erected before the commencement of works to prevent vehicle movements, and encroachment of personnel, onto adjacent areas. * The work site boundaries will be regularly checked to ensure that they are not breached and that damage does not occur to surrounding areas. **EC9*** Environmental Monitoring & Audit Requirements** The implementation of the ecological mitigation measures should be checked as part of the environmental monitoring in the preventive impacts and adverse ecological impacts are prevented and prevented and the adverse ecological impacts are prevented and prevented and the adverse ecological impacts are prevented and p	Recommended Measures Econocerns to address implement the measure? The surface runoff contained any oil and grease will pass through the oil interceptors; and, Control measures, including implementation of excavation schedules, lining and covering of excavated stockpiles will be implemented to minimise contaminated stormwater run-off from the SENTX site. EC2 Good Construction Practice: Fences along the boundary of the SENTX Site will be erected before the commencement of works to prevent vehicle movements, and encroachment of personnel, onto adjacent areas. The work site boundaries will be regularly checked to ensure that they are not breached and that damage does not occur to surrounding areas. EC9 Environmental Monitoring & Audit Requirements The implementation of the ecological mitigation measures should be checked as part of the environmental monitoring and covering of excavation should be checked as part of the environmental monitoring and covering of excavation schedules, lining and covering of excavated stockpiles will be implementation of excavation schedules, lining and covering of excavated stockpiles will be erected before the commencement of works to prevent the cological impacts are prevented and that damage does not occur to surrounding areas. To ensure that adverse ecological impacts are prevented and everse ecological impacts are preven	Recommended Measures implement the measure? * The surface runoff contained any oil and grease will pass through the oil interceptors; and, * Control measures, including implementation of excavation schedules, lining and covering of excavated stockpiles will be implemented to minimise contaminated stormwater run-off from the SENTX site. **ECZ*** * Fences along the boundary of the SENTX Site will be erected before the commencement of works to prevent vehicle movements, and encroachment of personnel, onto adjacent areas. * The work site boundaries will be regularly checked to ensure that they are not breached and that damage does not occur to surrounding areas. **ECX** * Environmental Monitoring & Audit Requirements To ensure that adverse ecological impacts are prevented and provided and the office of the commencement of the ecological impacts are prevented and that damage does not occur to surrounding areas. **The work site boundaries will be regularly checked to ensure that they are not breached and that damage does not occur to surrounding areas. **To ensure that adverse ecological impacts are prevented and the office of the environmental monitoring and coverse ecological impacts are prevented and that admange does not occur to surrounding areas. **To ensure that adverse ecological impacts are prevented and provided impacts are prevented and provid	Recommended Measures implement the measure? To minimise potential ecological impacts arising from the SENTX Site will be erected before the commencement of works to prevent vehicle movements, and encroachment of personnel, onto adjacent areas. ECS Provious measures should be checked and that damage does not occur to surrounding areas. ECS Provious measures should be checked and mitigation measures should be checked and part of the environmental monitoring and provided impacts are prevented and that alwaps appared to the commencement of the cological migratis are prevented and that alwaps appared to the environmental monitoring and provided impacts are prevented and that alwaps appared to the commencement of the cological impacts are prevented and that damage and provided the ecological impacts are prevented and that alwaps appared to the commencement of the ecological impacts are prevented and that alwaps are provided to ensure that adverse ecological impacts are prevented and that alwaps are provided to ensure that any provided the ecological impacts are prevented and that alwaps are provided to ensure that any provided the ecological impacts are prevented and that alwaps are provided to ensure that alwaps are provided to ensure that any provided the ecological impacts are prevented and that alwaps are provided to ensure that alwaps are provided to ensure that any provided the ecological impacts are prevented and that alwaps are provided to ensure that alwaps are provided to ensure that alwaps are provided to ensure that alwaps are prevented and that alwaps are provided to ensure that the provided the ecological impacts are prevented and that alwaps are provided to ensure that the provided the ecological impacts are prevented and that the provided the ecological impacts are prevented and that the provided the ecological impacts are prevented and the	Recommended the Measures implement the measure? Put the measure? The surface runoff contained any oil and grease will pass through the oil interceptors; and, • Control measures, including implementation of excavation schedules, lining and covering of excavated stockpiles will be implemented to minimise contaminated stormwater run-off from the SENTX site. EC2 • Fences along the boundary of the SENTX Site will be erected before the commencement of works to prevent vehicle movements, and encroachment of personnel, onto adjacent areas. • The work site boundaries will be regularly checked to ensure that they are not breached and that damage does not occur to surrounding areas. EC9 • Environmental Monitoring & Audit Requirements To ensure that adverse ecological migacts are prevented infigation measures should be checked as part of the environmental monitoring of the environmental monitoring and the properties of the environmental monitoring and the properties of the environmental monitoring and the properties of the environmental monitoring and the environmental monitoring and the environmental monitoring and the environmental monitoring as a part of the environmental monitoring and the properties and the measures of the environmental monitoring and the properties	Recommended Measure & Main Concerns to address	Recommended Measures Main Concerns to address **Interpretation of the SENTX Site will be erected before the commencement of works to adjacent areas.** **Project** **Interpretation of the cological impacts and encroachment of personnel, onto adjacent areas.** **Project** **

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended	Location of the Measures	Who to implement	the	meas	implement sure? (1)	What requirements or standards for the	Implementation Status and Remarks
			Measure & Main Concerns to address		the measure?	D	С	O/R A	measure to achieve?	
		construction period.								
Landscape	e and Visu	aal - Construction Phase								
10.6.5	LV1	CM1 - The construction area and area allowed for the contractor's office, leachate treatment plant and laboratory areas will be minimised to a practical minimum, to avoid impacts on adjacent landscape.	To minimise the landscape and visual impacts	SENTX Site	SENTX Contractor		√		EIAO-TM Annex 18 and ETWBC 3/2006	Implemented
10.6.5	LV2	CM2 - Topsoil, where identified, will be stripped and stored for re-use in the construction of the soft landscape works, where practical. The Contract Specification will include storage and reuse of topsoil as appropriate.	To minimise the landscape and visual impacts	All construction works area	SENTX Contractor		✓		EIAO-TM Annex 18	Not applicable
10.6.5	LV3	CM3 - All existing trees at the edges of the landfill will be carefully protected during construction. Detailed Tree Protection Specification will be provided in the Contract Specification. Under this Specification, the Contractor will be required to submit, for approval, a detailed working method statement for the protection of trees prior to undertaking any works adjacent to all retained trees, including trees in Contractor's works areas.	To minimise the landscape and visual impacts	Potential impacted area	SENTX Contractor		✓		EIAO-TM Annex 18 and ETWBC 3/2006	Implemented
10.6.5	LV4	CM4 - Trees unavoidably affected by the works will be transplanted, where necessary and practical. A detailed Tree	landscape and visual	Potential impacted area	SENTX Contractor	✓	✓		EIAO-TM Annex 18 and ETWBC 3/2006	Not applicable

EIA Ref. EM&A Ref		Environmental Protection Measures/ Mitigation Measures	,	the Measures i	Who to implement	When to implement the measure? (1)		sure? (1)	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
			Measure & Main Concerns to address	the measure?		D C O/R A r		O/R A		
		Transplanting Specification will be provided in the Contract Specification, if applicable. Sufficient time for necessary tree root and crown preparation periods will be allowed in the project programme.								
10.6.5 and SENTX latest design	LV5	CM5 - Within 3 months of taking possession of the SENTX Site, the Contractor will plant advance screen planting of native species at Light Standard size at 1.5m centres along the High Junk Peak Trail so as to screen views of the Works from the trail. Tree planting locations will be agreed with AFCD. Works will be completed within 9 months of taking possession of the SENTX Site.	To minimise the landscape and visual impacts	At High Junk Peak Hiking Trail	SENTX Contractor		✓		EIAO-TM Annex 18	Implemented
10.6.5	LV6	CM6 - The Contractor's office, leachate treatment plant and laboratory will be given an aesthetic treatment in earth tones to reduce their visual impact and albedo and blend them into the surrounding landscape.	To minimise the landscape and visual impacts	Infrastructure area	SENTX Contractor	√	✓		EIAO-TM Annex 18	Implemented
10.6.5	LV7	CM7 - The Contractor's office, leachate treatment plant and laboratory will be surrounded by a minimum of 5m wide and 0.75m high earth bund on the west and south sides planted with a dense screen of tree and shrub vegetation. Additional tree planting will be provided in unused spaces with thin infrastructure	To minimise the landscape and visual impacts	Infrastructure area	SENTX Contractor	✓	✓		EIAO-TM Annex 18 and ETWBC 7/2002	Not applicable

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended	Location of the Measures	Who to implement			implement ure? ⁽¹⁾	What requirements or standards for the	Implementation Status and Remarks
		-	Measure & Main Concerns to address		the measure?	D	С	O/R A	measure to achieve?	
		site, along access roads and in and around car parks. This will be supplemented with shrub planting, where appropriate.								
10.6.5	LV8	CM8 - Planting trials will be carried out in an on-site nursery prior to implementation of the first phase of restoration to establish the best planting matrix and management intensity of the recommended plant materials for the restoration.	To minimise the landscape and visual impacts	SENTX Site	SENTX Contractor		✓		EIAO-TM Annex 18	Implemented
11.4.1 and SENTX latest design	LV9	During the preparation of the detailed landscape design plan, the design submission will be audited against the recommendation proposed in the <i>ER Report</i> by the Registered Landscape Architect from the ET.	To ensure the implementation of mitigation measures proposed in this EIA Report	SENTX Site	SENTX Contractor/E T	✓	✓		EIAO-TM Annex 18	Implemented

Annex C

Monitoring Schedule for This Reporting Period

South East New Territories (SENT) Landfill Extension EM&A Impact Monitoring Schedule during Construction Phase

January 2020

Sun	Mon	Tue	Wed	Thu	Fri	Sat
			1	2	Surface Water Monitoring (pm) Noise Monitoring (pm)	4
5 Dust Monitoring	6	7	8	9 Surface Water Monitoring (pm) Noise Monitoring (pm)	10	Dust Monitoring
12	13	14	15	Surface Water Monitoring (pm) Noise Monitoring (pm)	Dust Monitoring	18
19	20	21	22	Dust Monitoring Surface Water Monitoring (pm) Noise Monitoring (pm)	24	25
26	27	28	29 Dust Monitoring	Surface Water Monitoring (pm) Noise Monitoring (pm)	31	

Note

Impact dust monitoring will be conducted at two monitoring stations (DM1 and DM2) under the on-going EM&A programme TKO Area 137 Fill Bank and the results will be shared with SENTX.

South East New Territories (SENT) Landfill Extension EM&A Impact Monitoring Schedule during Construction Phase

February 2020

Sun	Mon	Tue	Wed	Thu	Fri	Sat
						1
2	3	4	5	-	7	0
2	3	4 Dust Monitoring	5	6 Surface Water Monitoring (pm)	/	8
		Dust Montoring		Noise Monitoring (pm)		
				Troise Fromtoning (Pin)		
9	10	11	12	13	14	15
	Dust Monitoring		Surface Water Monitoring (pm)			
			Noise Monitoring (pm)			
			10			
16 Dust Monitoring	17	18	19	20 Surface Water Monitoring (nm)	21	22 Dust Monitoring
Dust Monitoring				Surface Water Monitoring (pm)		Dust Monitoring
				Noise Monitoring (pm)		
23	24	25	26	27	28	29
				Surface Water Monitoring (pm)	Dust Monitoring	
				Noise Monitoring (pm)		

Note

Impact dust monitoring will be conducted at two monitoring stations (DM1 and DM2) under the on-going EM&A programme TKO Area 137 Fill Bank and the results will be shared with SENTX.

South East New Territories (SENT) Landfill Extension EM&A Impact Monitoring Schedule during Construction Phase

March 2020

Sun	Mon	Tue	Wed	Thu	Fri	Sat
1	2	3	4	5	6	7
				Dust Monitoring		
				Surface Water Monitoring (pm)		
				Noise Monitoring (pm)		
8	9	10	11	12	13	14
			Dust Monitoring	Surface Water Monitoring (pm)		
				Noise Monitoring (pm)		
15	16	17	18	19	20	21
		Dust Monitoring	Surface Water Monitoring (pm)			
			Noise Monitoring (pm)			
22	23	24	25	26	27	28
	Dust Monitoring			Surface Water Monitoring (pm)		
				Noise Monitoring (pm)		
29	30	31				
Dust Monitoring						

Note

Impact dust monitoring will be conducted at two monitoring stations (DM1 and DM2) under the on-going EM&A programme TKO Area 137 Fill Bank and the results will be shared with SENTX.

Air Quality

24-hour TSP Monitoring Results

Table D1.1 24-hour TSP Monitoring Results at DM1

Start Date	Start Time	Finish Date	Finish Time	Weather	24-hour TSP (μg/m3)
5 Jan 20	8:30	6 Jan 20	8:30	Cloudy	114
11 Jan 20	8:00	12 Jan 20	8:00	Fine	95
17 Jan 20	15:20	18 Jan 20	15:20	Cloudy	124
23 Jan 20	8:00	24 Jan 20	8:00	Fine	116
29 Jan 20	9:32	30 Jan 20	9:32	Fine	103
4 Feb 20	8:00	5 Feb 20	8:00	Cloudy	104
10 Feb 20	8:00	11 Feb 20	8:00	Cloudy	98
16 Feb 20	8:30	17 Feb 20	8:30	Rainy	117
22 Feb 20	8:00	23 Feb 20	8:00	Fine	105
28 Feb 20	9:05	29 Feb 20	9:05	Fine	93
5 Mar 20	8:30	6 Mar 20	8:30	Cloudy	94
11 Mar 20	9:25	12 Mar 20	9:25	Cloudy	105
17 Mar 20	8:00	18 Mar 20	8:00	Rainy	91
23 Mar 20	11:09	24 Mar 20	11:09	Fine	113
29 Mar 20	8:00	30 Mar 20	8:00	Rainy	107
				Average	105
				Min	91
				Max	124

Note:

DM1 corresponds to the existing TSP monitoring station TKO-A1 currently operating by CEDD.

Figure D1.1 Graphical Presentation for 24-hr TSP Monitoring at DM1

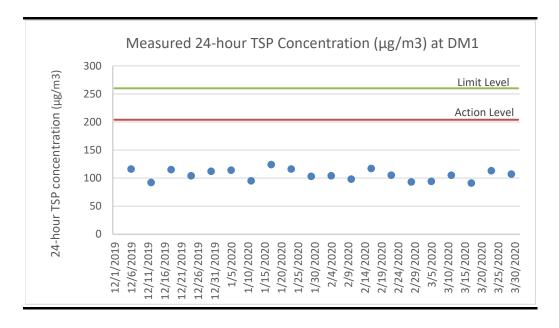



Table D1.2 24-hour TSP Monitoring Results at DM2

Start Date	Start Time	Finish Date	Finish Time	Weather	24-hour TSP (μg/m3)
5 Jan 20	8:30	6 Jan 20	8:30	Cloudy	101
11 Jan 20	8:00	12 Jan 20	8:00	Fine	82
17 Jan 20	15:30	18 Jan 20	15:30	Cloudy	108
23 Jan 20	8:00	24 Jan 20	8:00	Fine	104
29 Jan 20	9:45	30 Jan 20	9:45	Fine	87
4 Feb 20	8:00	5 Feb 20	8:00	Cloudy	86
10 Feb 20	8:00	11 Feb 20	8:00	Cloudy	83
16 Feb 20	8:30	17 Feb 20	8:30	Rainy	104
22 Feb 20	8:00	23 Feb 20	8:00	Fine	88
28 Feb 20	9:10	29 Feb 20	9:10	Fine	90
5 Mar 20	8:30	6 Mar 20	8:30	Cloudy	88
11 Mar 20	9:35	12 Mar 20	9:35	Cloudy	94
17 Mar 20	8:00	18 Mar 20	8:00	Rainy	85
23 Mar 20	11:15	24 Mar 20	11:15	Fine	90
29 Mar 20	8:00	30 Mar 20	8:00	Rainy	93
				Average	92
				Min	82
				Max	108

Note:

 $\ensuremath{\mathsf{DM2}}$ corresponds to the existing TSP monitoring station TKO-A2a currently operating by CEDD.

Figure D1.2 Graphical Presentation for 24-hr TSP Monitoring at DM2

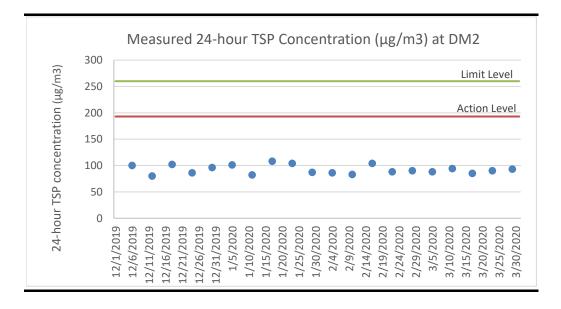

Event and Action Plan for Dust Monitoring

Annex D2 Event and Action Plan for Dust Monitoring During Construction Phase

		Action	
Event	ET	IEC	Contractor
Action Level			
Exceedance for one sample	 Identify the source(s) and investigate the cause(s) of exceedance Prepare Notification of Exceedance within 24 hours Inform Contractor, IEC and Project Proponent whether the cause of exceedance is due to the Project Repeat measurement to confirm finding if exceedance is due to the Project Increase monitoring frequency to daily if exceedance is due to the Project and continue until the monitoring results reduce to below action level 	 Verify the Notification of Exceedance Check monitoring data submitted by ET Check Contractor's working methods 	 Rectify any unacceptable practice Amend working methods if appropriate
Exceedance for two or more consecutive samples	 Identify the source(s) and investigate the cause(s) of exceedance Prepare Notification of Exceedance within 24 hours Inform Contractor, IEC and Project Proponent whether the cause of exceedance is due to the Project Discuss with Contractor and IEC for remedial measures required Ensure remedial measures are properly implemented If exceedance continues, arrange meeting with Contractor & IEC Continue monitoring at daily intervals if exceedance is due to the Project If no exceedance for 3 consecutive days, cease additional monitoring 	 Check monitoring data submitted by ET 	 Submit proposals for remedial measures to IEC Implement the agreed proposals Amend proposal if appropriate

		Action	
Event	ET	IEC	Contractor
Limit Level			
Exceedance for one sample	 Identify the source(s) and investigate the cause(s) of exceedance Prepare Notification of Exceedance within 24 hours Inform Contractor, IEC, Project Proponent and EPD whether the cause of exceedance is due to the Project Discuss with Contractor and IEC for remedial measures required Ensure remedial measures are properly implemented Repeat measurement to confirm finding if exceedance is due to the Project Increase monitoring frequency to daily if exceedance is due to the Project and continue until the monitoring results reduce to below limit level 	Check monitoring data submitted by ETCheck Contractor's working methods	 Take immediate action to avoid further exceedance Submit proposals for remedial measures to IEC Implement the agreed proposals Amend proposal if appropriate
Exceedance for two or more consecutive samples	 Identify source(s) and investigate the cause(s) of exceedance Prepare Notification of Exceedance within 24 hours Inform Contractor, IEC, Project Proponent and EPD the causes & actions taken for the exceedances Discuss with Contractor and IEC for remedial measures required Ensure remedial measures are properly implemented Continue monitoring at daily intervals if exceedance is due to the Project If no exceedance for 3 consecutive days, cease additional monitoring If exceedance due to the Project continues, consider what portion of the work is responsible and stop that portion of work until the exceedance is abated 		 Take immediate action to avoid further exceedance Submit proposals for remedial measures to IEC Implement the agreed proposals Resubmit proposals if problem still not under control


ENVIRONMENTAL RESOURCES MANAGEMENT


GREEN VALLEY LANDFILL LTD.


Meteorological Data


Annex D3 Meteorological Data


January 2020

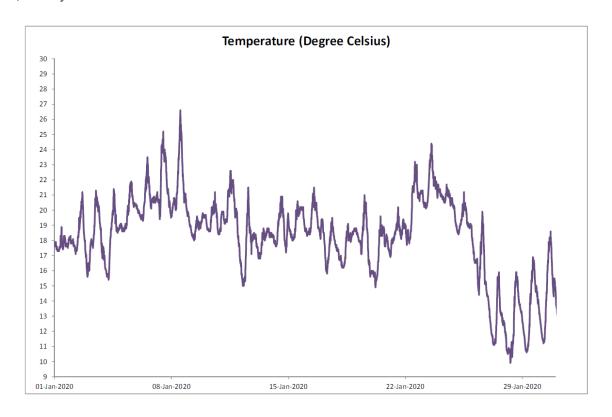


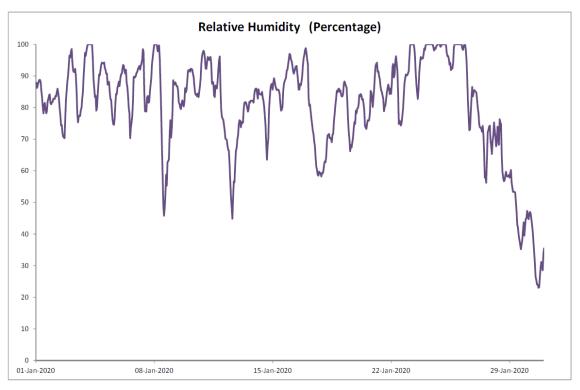


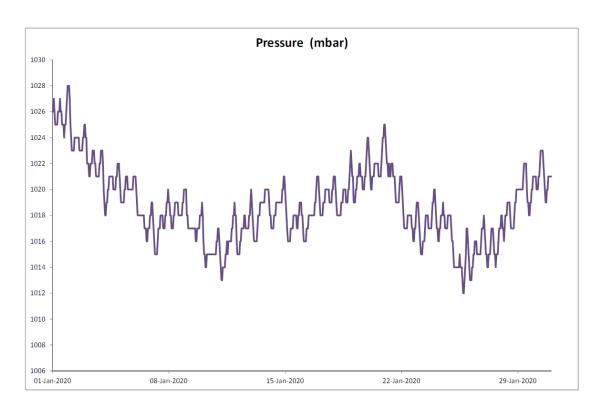

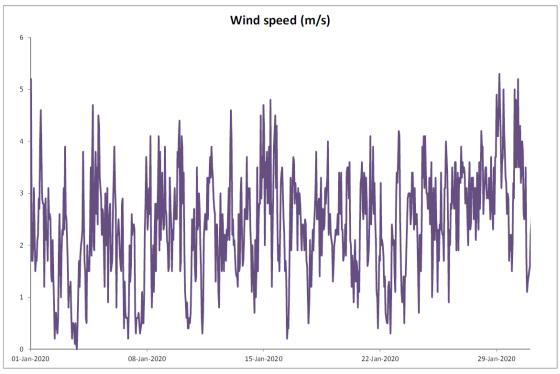


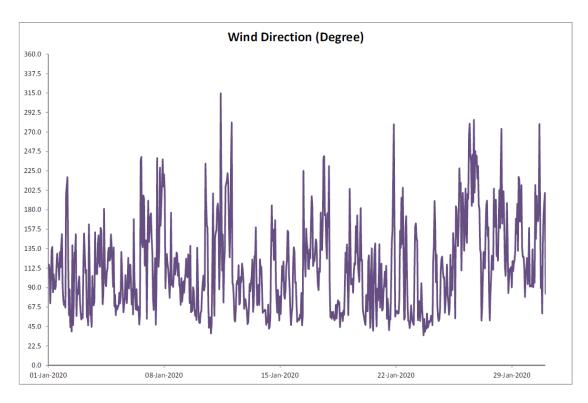


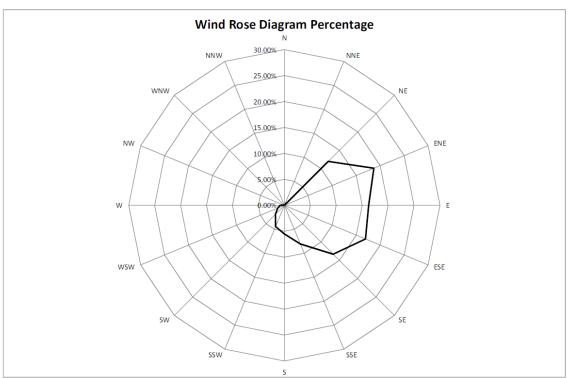


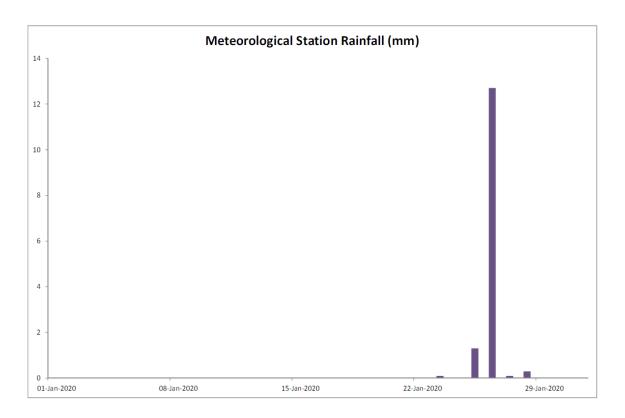



February 2020

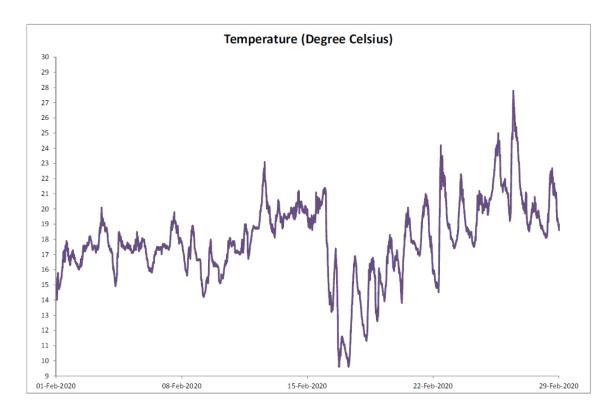


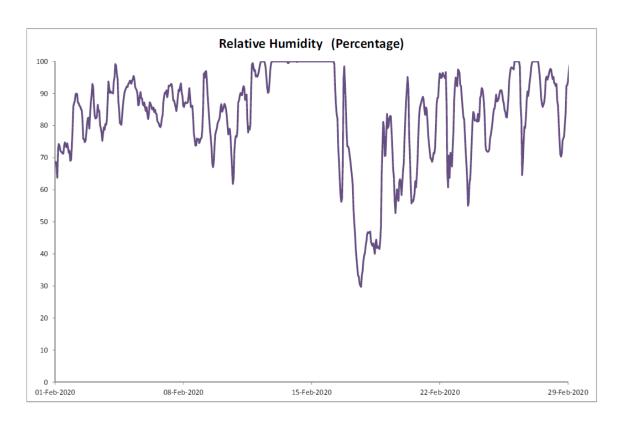


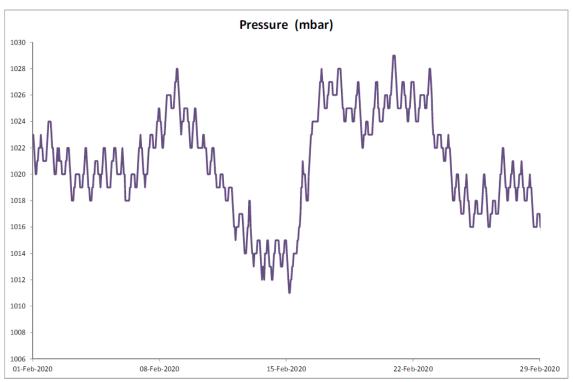


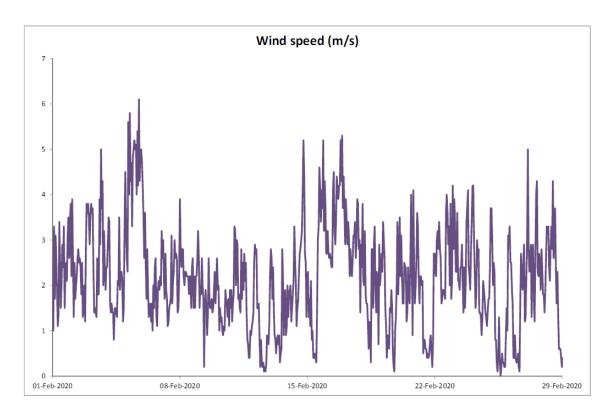


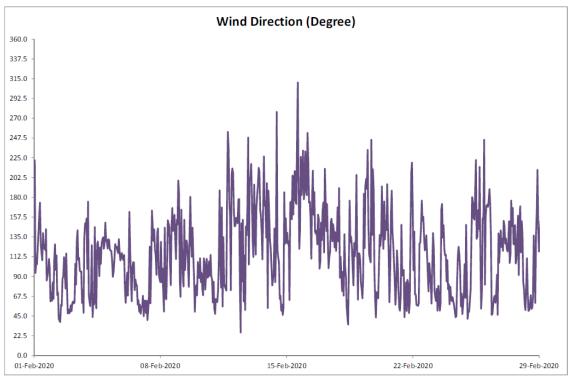


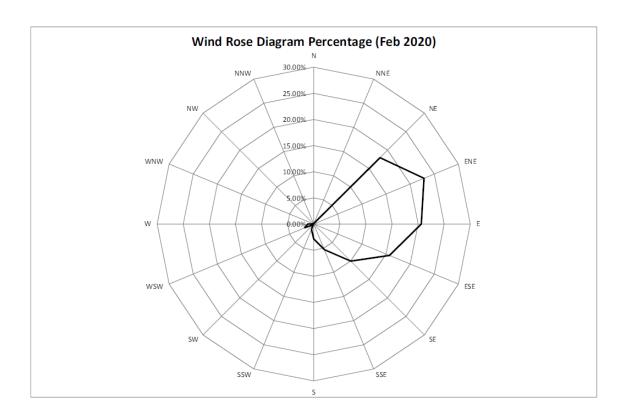


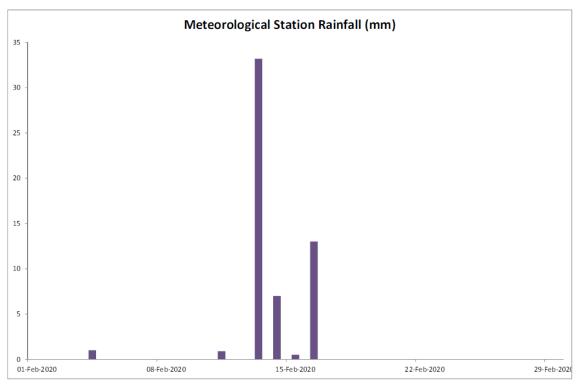


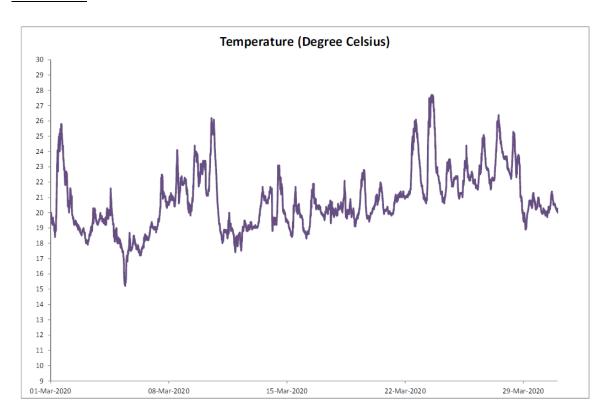


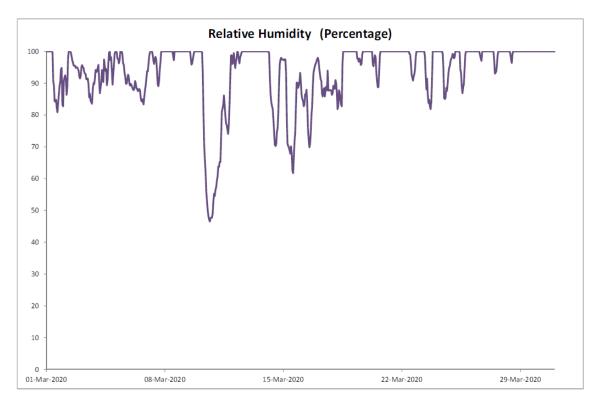


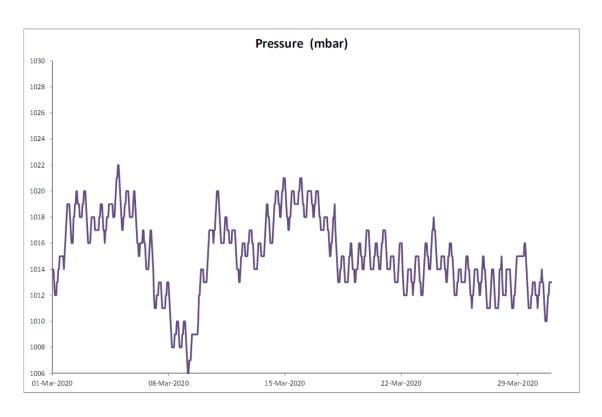

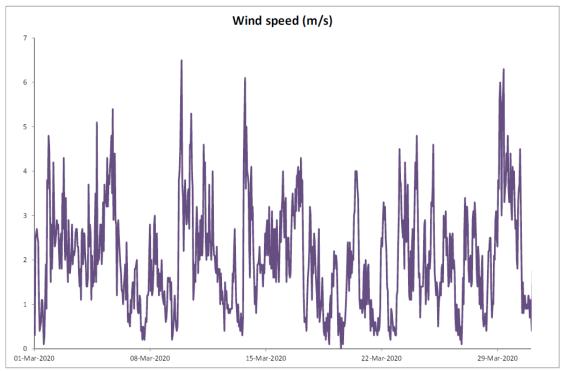

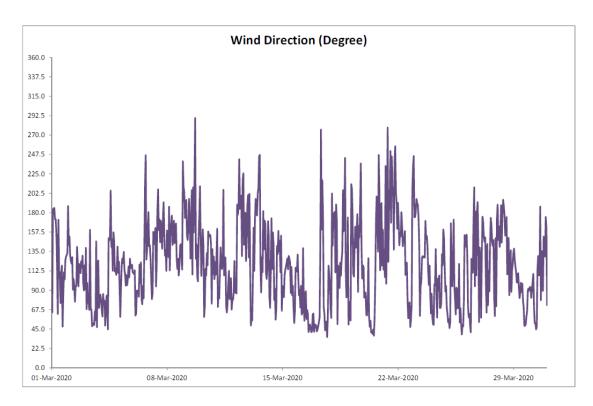

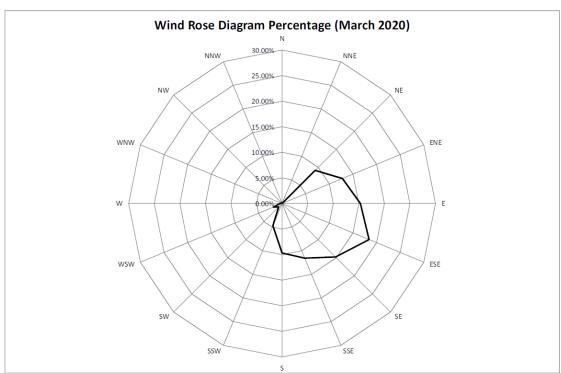

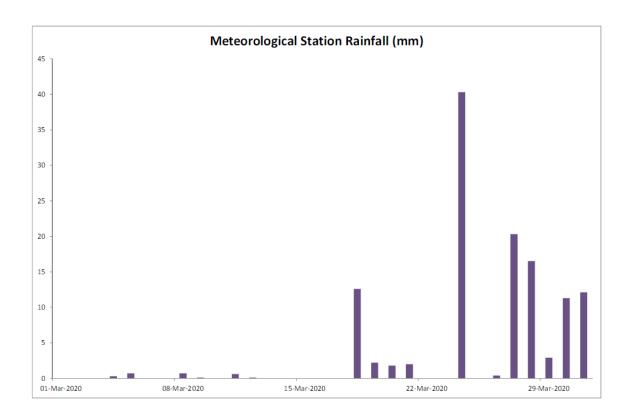

Annex E

Noise

Annex E1


Noise Monitoring Results

Table E1.1 Measured Noise Levels (dB(A)) at NM1 during Normal Working Hours (0700-1900 hours; Normal Weekdays)

Date	Start Time	Finish Time	Weather	$L_{10~(30min)}$	L _{90 (30min)}	Leq (30min)
3 Jan 20	14:36	15:06	Sunny	51.5	47.5	50.4
9 Jan 20	14:29	14:59	Sunny	52.0	48.5	50.8
16 Jan 20	14:38	15:06	Sunny	54.0	48.5	53.0
23 Jan 20	14:58	15:28	Sunny	49.5	45.0	47.8
30 Jan 20	13:34	14:04	Sunny	52.0	48.0	50.4
6 Feb 20	14:27	14:57	Sunny	54.0	48.5	51.9
12 Feb 20	14:39	15:09	Sunny	53.5	48.5	52.1
20 Feb 20	14:35	15:05	Sunny	54.0	48.5	53.1
27 Feb 20	14:39	15:09	Sunny	56.0	50.0	53.8
5 Mar 20	14:36	15:06	Sunny	54.0	47.5	52.2
12 Mar 20	14:31	15:01	Cloudy	51.5	48.5	50.5
18 Mar 20	NA	NA	Rainy	Monitori	ng was cance	lled due to
				a	dverse weath	ier.
26 Mar 20	14:43	15:13	Sunny	57.0	51.5	54.9
					Average	e 51.7
					Miı	n 47.8
					Max	x 54.9

Correction of +3 dB(A) was made for free field measurements.

Figure E1.1 Graphical Presentation for Noise Monitoring at NM1

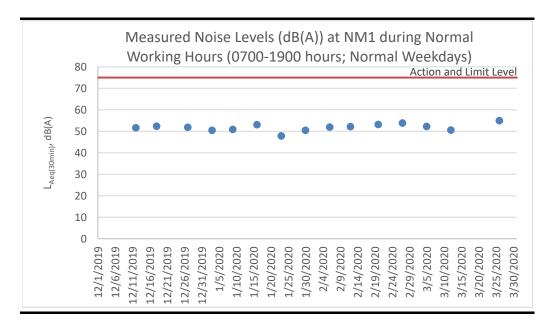

Annex E2

Event and Action Plan for Noise Monitoring

Annex E2 Event and Action Plan for Construction Noise

Event	Action							
	ET	IEC	Contractor					
Action Level	 Identify the source(s) and investigate the cause(s) of exceedance and complaint Prepare Notification of Exceedance within 24 hours Inform Contractor, IEC and Project Proponent whether the cause of exceedance is due to the Project Discuss with Contractor and IEC for remedial measures required Ensure remedial measures are properly implemented Have additional monitoring if exceedance is due to the Project. If exceedance stops, cease additional monitoring 	 Verify the Notification of Exceedance Check monitoring data submitted by ET Discuss with ET and Contractor on proposed remedial measures Review proposals on remedial measures Audit the implementation of the remedial measures Audit the effectiveness of the implemented remedial measures 	 Submit proposals for remedial measures to IEC Implement the agreed proposals 					
Limit Level	 Identify the source(s) and investigate the cause(s) of exceedance and complaint Prepare Notification of Exceedance within 24 hours Inform Contractor, IEC, Project Proponent and EPD whether the cause of exceedance is due to the Project Analyse the operation of SENTX and investigate the causes of exceedance Provide interim report to Contractor, IEC, Project Proponent and EPD the causes of the exceedances Discuss with Contractor and IEC for remedial measures required Ensure remedial measures are properly implemented Report the remedial measures implemented and the additional monitoring results to Contactor, IEC, Project Proponent and EPD Have additional monitoring if exceedance is due to the Project. If exceedance stops, cease additional monitoring 	 Verify the Notification of Exceedance Check monitoring data submitted by ET Discuss with ET and Contractor on proposed remedial measures Review proposals on remedial measures Audit the implementation of the remedial measures Audit the effectiveness of the implemented remedial measures 	 Take immediate measures to avoid further exceedance Submit proposals for remedial measures to IEC within 3 working days of notification Implement the agreed proposals Resubmit proposals if problem still not under control Stop the relevant activity of works as determined by the Project Proponent until the exceedance is abated 					

Surface Water Quality

Surface Water Quality Monitoring Results

Table F1.1 Surface Water Quality Monitoring Results at DP4T

Date	Time	Weather	Water	Water	Water	Dissolved	pН	Suspended	Remarks
		Condition	Appearance	Condition	Temperature	Oxygen (DO)	_	Solids (SS)	
					(°C)	(mg/L)		(mg/L)	
3 Jan 20	14:18	Sunny		Unable to	collect water samp	ole due to insuffic	ient flow		-
9 Jan 20	14:12	Sunny		Unable to	collect water samp	ole due to insuffic	ient flow		-
16 Jan 20	14:18	Sunny		Unable to	collect water samp	ole due to insuffic	ient flow		-
23 Jan 20	14:43	Sunny		Unable to	collect water samp	ole due to insuffic	ient flow		-
30 Jan 20	13:49	Sunny		Unable to	collect water samp	ole due to insuffic	ient flow		-
6 Feb 20	14:13	Sunny		Unable to	collect water samp	ole due to insuffic	ient flow		-
12 Feb 20	14:23	Sunny		Unable to	collect water samp	ole due to insuffic	ient flow		-
20 Feb 20	14:06	Sunny	Colourless	Semi-clear	17.7	9.83	7.91	18.6	-
20 Feb 20	14:17	Sunny	Colourless	Semi-clear	17.9	9.80	7.60	20.7	DP4 (Future, temporary) (Duplicate)
27 Feb 20	14:22	Sunny		Unable to	collect water samp	ole due to insuffic	ient flow		-
5 Mar 20	14:24	Sunny		Unable to	collect water samp	ole due to insuffic	ient flow		-
12 Mar 20	14:22	Sunny		Unable to	collect water samp	ole due to insuffic	ient flow		-
18 Mar 20	15:27	Sunny		Unable to	collect water samp	ole due to insuffic	ient flow		-
26 Mar 20	14:32	Sunny		Unable to	collect water samp	ole due to insuffic	ient flow		-
		•			Averag	ge 9.82	7.76	19.7	-
					Mi	n 9.80	7.60	18.6	-
					Ma	x 9.83	7.91	20.7	-

Notes: DP4 was temporary relocated to DP4 (Future, temporary) (i.e. DP4T) as an interim discharge point from the monitoring event on 16 May 2019.

Table F1.2 Surface Water Quality Monitoring Results at DP6

Date	Time	Weather	Water	Water	Water	Dissolved	pН	Suspended	Remarks
		Condition	Appearance	Condition	Temperature	Oxygen (DO)		Solids (SS)	
					(°C)	(mg/L)		(mg/L)	
3 Jan 20	14:10	Sunny		Unable to	collect water samp	ole due to insuffici	ent flow		
9 Jan 20	14:05	Sunny		Unable to	collect water samp	ole due to insuffici	ent flow		-
16 Jan 20	14:05	Sunny		Unable to	collect water samp	ole due to insuffici	ent flow		-
23 Jan 20	14:36	Sunny		Unable to	collect water samp	ole due to insuffici	ent flow		-
30 Jan 20	13:38	Sunny		Unable to	collect water samp	ole due to insuffici	ent flow		-
6 Feb 20	14:06	Sunny		Unable to	collect water samp	ole due to insuffici	ent flow		-
12 Feb 20	14:12	Sunny		Unable to	collect water samp	ole due to insuffici	ent flow		-
20 Feb 20	14:01	Sunny		Unable to	collect water samp	ole due to insuffici	ent flow		-
27 Feb 20	14:10	Sunny		Unable to	collect water samp	ole due to insuffici	ent flow		-
5 Mar 20	14:08	Sunny		Unable to	collect water samp	ole due to insuffici	ent flow		-
12 Mar 20	14:07	Cloudy		Unable to	collect water samp	ole due to insuffici	ent flow		-
18 Mar 20	15:03	Rainy		Unable to	collect water samp	ole due to insuffici	ent flow		-
26 Mar 20	14:11	Sunny		Unable to	collect water samp	ole due to insuffici	ent flow		-
					Averag	e -	-	-	-
					Mi	n -	-	-	-
					Ma	x -	-	-	-

Figure F1.1 Graphical Presentation for Surface Water Quality Monitoring (DO)

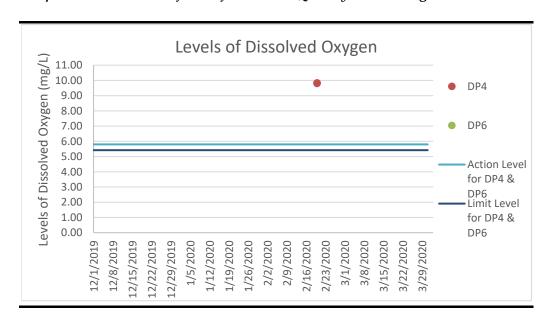


Figure F1.2 Graphical Presentation for Surface Water Quality Monitoring (pH)


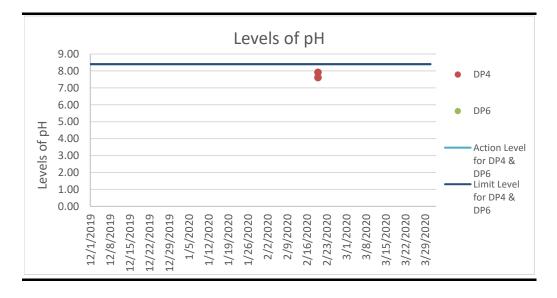


Figure F1.3 Graphical Presentation for Surface Water Quality Monitoring (SS)

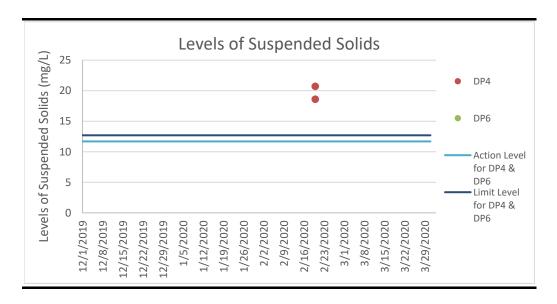

Event and Action Plan for Surface Water Quality Monitoring

Annex F2 Event and Action Plan for Surface Water Quality During Construction Phase

Event	Action						
	ET	IEC	Contractor				
Action Level being exceeded by one sampling day	 Repeat <i>in situ</i> measurement to confirm findings Identify the source(s) and investigate the cause(s) of exceedance Prepare Notification of Exceedance within 24 hours Inform Contractor, IEC and Project Proponent whether the cause of exceedance is due to the Project Repeat measurement on the next day of exceedance if exceedance is due to the Project 	 Verify the Notification of Exceedance Check monitoring data submitted by ET Check Contractor's working methods 	 Rectify any unacceptable practice Amend working methods if appropriate 				
Action Level being exceeded by two consecutive sampling days	 Repeat <i>in situ</i> measurement to confirm findings Identify the source(s) and investigate the cause(s) of exceedance Prepare Notification of Exceedance within 24 hours Inform Contractor, IEC and Project Proponent whether the cause of exceedance is due to the Project Discuss with Contractor and IEC for remedial measures required Ensure remedial measures are properly implemented Increase the monitoring frequency to daily if exceedance is due to the Project and continue until no exceedance of Action Level 	 Verify the Notification of Exceedance Check monitoring data submitted by ET Check Contractor's working methods Discuss with ET Leader and Contractor on proposed remedial measures Review proposals on remedial measures Audit the implementation of the remedial measures Audit the effectiveness of the implemented remedial measures 	 Submit proposals for remedial measures to IEC Implement the agreed proposals Amend proposal if appropriate 				

Event	Action						
	ET	IEC	Contractor				
Limit Level being exceeded by two consecutive sampling days	 Repeat <i>in situ</i> measurement to confirm findings Identify source(s) of impact and cause(s) of exceedance Prepare the Notification of Exceedance within 24 hours Inform Contractor, IEC, Project Proponent and EPD whether the cause of exceedance is due to the Project Discuss with Contractor and IEC for remedial measures required Ensure remedial measures are properly implemented Increase the monitoring frequency to daily if exceedance is due to the Project until no exceedance of Limit Level 	 Verify the Notification of Exceedance Check monitoring data submitted by ET Check Contractor's working methods Discuss with ET and Contractor on proposed remedial measures Review proposals on remedial measures Audit the implementation of the remedial measures Audit the effectiveness of the implemented remedial measures 	 Critically review the working methods Rectify unacceptable practice Check all plant and equipment Consider changes of working methods Discuss with the ET and IEC and propose mitigation measures to the IEC Implement the agreed mitigation measures 				
Limit Level being exceeded by more than two consecutive sampling days	 Repeat <i>in situ</i> measurement to confirm findings Identify source(s) of impact and cause(s) of exceedance Prepare the Notification of Exceedance within 24 hours Inform Contractor, IEC, Project Proponent and EPD whether the cause of exceedance is due to the Project Check monitoring data, all plant, equipment and Contractor's working methods Discuss with Contractor and IEC for remedial measures required Ensure mitigation measures are implemented Increase the monitoring frequency to daily if exceedance is due to the Project until no exceedance of Limit Level for two consecutive days 	 Verify the Notification of Exceedance Check monitoring data submitted by ET Check Contractor's working methods Discuss with ET and Contractor on proposed remedial measures Review proposals on remedial measures Audit the implementation of the remedial measures Audit the effectiveness of the implemented remedial measures 	 Critically review the working methods Rectify unacceptable practice Check all plant and equipment Consider changes of working methods Discuss with the ET and IEC and propose mitigation measures Implement the agreed mitigation measure As directed by the Project Proponent, slow down or stop all or part of the construction activities 				

ENVIRONMENTAL RESOURCES MANAGEMENT

GREEN VALLEY LANDFILL LTD.

Investigation Reports of Environmental Quality Limit Exceedance

Investigation Report of Environmental Quality Limit Exceedance

Project	South East New Territories (SENT) Landfill Extension
Date	20 February 2020
Time	DP4T: 14:06 and 14:17 (Duplicate)
Monitoring Location	DP4T
Parameter	Surface Water (Suspended Solids (SS))
Action / Limit Levels	DP4T: Action level: >11.7 mg/L
	Limit level: >12.7 mg/L
Measured Level	DP4T: 18.6 mg/L
	DP4T (Duplicate): 20.7 mg/L
Possible reason Action Taken / Action to	No works which may lead to potential SS increase was conducted in the vicinity of surface water channel leading to DP4T on the sampling day based on on-site observations and construction activities described by the Contractor. During the sampling event, no potential surface water discharge or overflow to the DP4T channel was observed. Site water discharged to the DP4T channel was treated by the Wetsep prior to discharge. Wetsep near DP4T was functioning properly during the sampling event. Environmental deficiency was not observed during the weekly site inspection in the morning. The Contractor has complied with the recommendations and conditions outlined in the updated EM&A Manual. As no potential source from the Project-related activities which may lead to SS increase was identified, and the Contractor has implemented relevant mitigation measures recommended in the updated EM&A Manual, there is no adequate evidence showing that the SS exceedance at DP4T was deemed to Project-related activities. Examination of environmental performance of the Project will be
be Taken	continued during the weekly inspections. The Contractor is reminded to implement relevant and appropriate mitigation measures according to the updated EM&A Manual to avoid any exceedance of the Action and Limit Level.
Remarks	-
Propaged by: Abboy I am	<u> </u>

Prepared by: Abbey Lau
Designation: Environmental Team
Date: 9 March 2020

Annex G

Cumulative Statistics on Exceedances, Environmental Complaints, Notification of Summons and Status of Prosecutions

 Table G1
 Cumulative Statistics on Exceedances

		Total No. recorded in this reporting period	Total No. recorded since project commencement
Air Quality (24-hr TSP)	Action	0	0
	Limit	0	0
Noise	Action	0	0
	Limit	0	0
Surface Water Quality	Action	0	0
	Limit	1	33

Table G2 Cumulative Statistics on Complaints, Notifications of Summons and Successful Prosecutions

Reporting Period	Cumulative Statistics					
	Complaints	Notifications of Summons	Prosecutions			
This Reporting Period (1 January – 31 March 2020)	0	0	0			
Total no. received since project commencement	1	0	0			