



MAUNSELL | AECOM

# Ocean Park Master Redevelopment Project

Monthly Environmental Monitoring & Audit  
Report – March 2008



Ocean Park Master Redevelopment Project

Environmental Permit No. EP-249/2006/A - Condition 3.4

Monthly EM&A Report – March 2008

Submitted by Maunsell Consultants Asia Ltd on 08-04-2008

This is to verify that

Monthly EM&A Report – March 2008

Submitted by Maunsell Consultants Asia Ltd

On 08-04-2008

Has been verified by the undersigned.

Signed



Dr Anne F Kerr  
Independent Environmental Checker (IEC)  
Retained by Ocean Park Corporation  
pursuant to Environmental Permit No. EP-249/2006/A

Date

10 April 2008

## **Ocean Park Master Redevelopment Project**

**EP-249/2006/A – Condition 3.4**

**Monthly EM&A Report – March 2008**

Certified by



on 11-Apr-08

Terence Kong

Project Environmental Team Leader

**Verified by** Independent Environmental Checker **on** 10-Apr-08

IEC Certificate attached in the submission? Yes

**Submitted to Ocean Park on** 14-Apr-08

## **Table of Content**

### **Part 1 Project Overview**

#### **Executive Summary**

<b>1.</b>	<b>Introduction.....</b>	<b>4</b>
<b>2.</b>	<b>Project Organisation .....</b>	<b>4</b>
<b>3.</b>	<b>Construction Works Undertaken during the Reporting Month.....</b>	<b>5</b>
<b>4.</b>	<b>Permits and License Status.....</b>	<b>6</b>
4.1.	ENVIRONMENTAL PERMIT .....	6
4.2.	CNP .....	7
4.3.	OTHER PERMITS & LICENSES .....	10
<b>5.</b>	<b>EP Submissions Status .....</b>	<b>11</b>
<b>6.</b>	<b>Materials Management.....</b>	<b>12</b>
<b>7.</b>	<b>Environmental Monitoring and Results .....</b>	<b>13</b>
7.1.	REQUIREMENTS .....	13
7.2.	MONITORING LOCATIONS .....	14
7.3.	MONITORING RESULTS.....	15
7.4.	EXCEEDANCES .....	16
<b>8.</b>	<b>Site Audit.....</b>	<b>16</b>
8.1.	IEC SITE AUDIT .....	16
8.2.	NON- COMPLIANCE .....	17
<b>9.</b>	<b>Implementation status of Environmental Mitigation Measures .....</b>	<b>17</b>
<b>10.</b>	<b>Summary of Complaint, Summon or Prosecution .....</b>	<b>17</b>
<b>11.</b>	<b>Future Issues .....</b>	<b>18</b>
<b>12.</b>	<b>Conclusion and Recommendation .....</b>	<b>19</b>
12.1.	CONCLUSION .....	19
12.2.	RECOMMENDATION .....	20

### **Appendix A IEC's Site Inspection Records**

<b>Part 2</b>	<b>CI-05 EM&amp;A Monthly Report</b>
<b>Part 3</b>	<b>CS-01 EM&amp;A Monthly Report</b>
<b>Part 4</b>	<b>CW-02 EM&amp;A Monthly Report</b>



## Part 1 Project Overview

### Executive Summary

This is the combined monthly EM&A Report for Ocean Park Master Redevelopment Project, which includes Contract CI-05 “Site Formation, Funicular Tunnel and Miscellaneous Work”, CS-01 “The Vet Hospital” and CW02 “The Astounding Asia”. This report presents the results of EM&A works conducted in the reporting month of March 2008 (from 26 February 2008 to 25 March 2008).

A summary of monitoring and audit activities conducted in the reporting period is listed below:

1-hour TSP monitoring	14 sessions for AM1, AM2 & AM3A
24-hour TSP monitoring	5 sessions for AM1, AM2 & AM3A
Daytime noise monitoring	4 sessions for CN1-CN4
Evening or night time noise monitoring	4 sessions
Holiday time noise monitoring	0 sessions
Terrestrial ecology monitoring	1 session
Coral monitoring	0 sessions for Site 1-4 0 sessions for Site 5 and Control Station
Environmental Site Inspection	5 sessions (including IEC audit)

No exceedance was recorded on the 1-hour TSP monitoring, 24-hour TSP monitoring, daytime & evening time noise and terrestrial ecology monitoring. No impact coral monitoring was conducted within the reporting period. It was because no exceedance was recorded at all coral monitoring stations and control site in the past six months, therefore the monitoring frequency was changed to quarterly until the end of construction works as recommended in approved EM&A Manual. The next scheduled monitoring should be in May 2008.

No non-compliance from IEC, summons or prosecution related to environmental issues was made against the Ocean Park Master Redevelopment Project in the reporting period of March 2008.

6 complaints were received within the month of March 2008. 3 Complaints were received from resident at Broadview Court on 12, 13 and 20 March 2008 regarding to the noise nuisance of night works at Nam Long Shan Road. Investigation was conducted and the findings were that movable noise panels and noise shield were using during the night breaking works. The possible cause of the noise nuisance would be that the noise emitted through the gaps between the panels. The Contractor was reminded to ensure placing the panels properly in order to minimize the noise nuisance to the vicinity. Surveillance has been stepped up in order to ensure that timely actions could be taken to avoid any new complaints.

1 complaint was received on 15 March 2008 regarding to the dust nuisance at the crusher, conveyor area at Nam Long Shan Road. With regards to the complaint, action was taken as follows:

- Enhance the water spraying at the dropping outlet of the conveyor, especially the frequency, in order to minimize the dust nuisance to the vicinity.
- Installed modify sprinklers around the stockpile area.
- Surveillance was stepped up in order to ensure that timely actions could be taken to rectify any complaints.

Besides, the length of dust screen was extended to increase the coverage area of stockpile and water spraying at the dust screen was also enhanced to minimize the dust nuisance due to strong wind.

1 complaint was received on 19 March 2008 regarding to the noise from the temporary steel plates over the trenches at Nam Long Shan Road. With regards to the complaint, immediate action was taken and summarized as follows:

- Sufficient sandbags or rubber pad were provided before placing the temporary steel plates back to cover the trench.

The last complaint was received on 25 March 2008 from the Police Training School regarding the dust nuisance from the construction site to the school. With regards to the complaint, immediate action was taken and summarized as follows:

- The frequency of water spraying for the exposed areas was enhanced.
- Stockpiles would be covered by tarpaulin.

## 1. Introduction

The “Master Redevelopment Project of Ocean Park” (hereinafter known as the “Project”) is implemented by the Ocean Park Corporation at its existing site of Ocean Park and Nam Long Shan, Aberdeen. The Project involves both reconstruction/modification of existing facilities and expansion of the Park, and therefore under Environmental Permit, EP-249/2006/A.

The construction works of the project consists of various contracts. Details of the contracts, which are required to perform the EM&A programme, are shown below.


Contract No.	Contract Title	Contractor	Construction Commencement
CI-05	Site Formation, Funicular Tunnel and Miscellaneous Works	Dragages-Bouygues JV	12 March 2007
CS-01	Back of House for Marine Mammal Veterinary Hospital	Kaden – ATAL JV	26 March 2007
CW-02	Astounding Asia	W. Hing Construction Co. Ltd	1 August 2007

The Contractors will conduct environmental monitoring and audits during the construction stage and produce contract specific monthly EM&A reports. The RSS will prepare a combined monthly EM&A report for the project. This is the combined monthly EM&A Report including the IEC audit findings, CI05, CS01 and CW02 Monthly EM&A Report. This report presents the results of EM&A works conducted in the reporting month of March 2008 (from 26 February 2008 to 25 March 2008).

## 2. Project Organisation

The structure of the environmental management team is shown in below figure.

### Management Organization

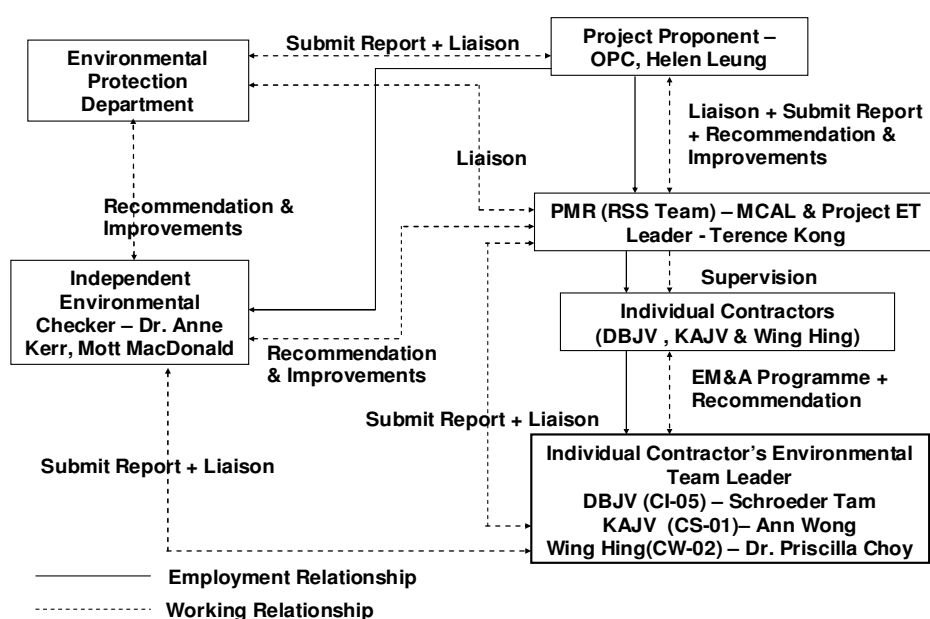

### 3. Construction Works Undertaken during the Reporting Month

In the reporting month, the construction activities summarise as follows.

#### **CI-05**

##### **Waterfront**

- Soft Ground Tunnel Excavation
- Waterfront Terminus Excavation – North
- Waterfront Access Road (e.g. Trench Excavation, Temporary Road Diversion)
- Utilities Diversion (e.g. Storm Drainage, Watermain & Sewerage) at Entry Plaza Advance Work
- Permanent Bus Terminus
- Works for Grand Aquarium Advance Works

##### **Tai Shue Wan**

- Conveyor Belt and Barging Point Operation

##### **Summit**

- Main Tunnel Excavation
- Tunnel Permanent Lining
- Drill and Blast for Summit Site Formation
- Excavation at Summit
- Summit Terminus & FS Tank Building
- Crusher and Conveyor Belts Operation

##### **Government Entrusted Works**

- Excavation, Trail Pit Excavation, Construction of Manhole, Pipe Laying (e.g. sewer & water main), Road Surface Reinstatement and Backfilling at NLS Road Entrusted Work
- Excavation, Construction of Manhole, Pipe Laying, Trail Pit Excavation, Construction of Sheet Piling and Backfilling at Wong Chuk Hang Road

#### **CS-01**

- R.C. Structure: Construction of Dolphin Pools.
- Truss Installation: Material Delivery, Installation.
- E&M & LSS Installation: Plumber, Electric Installation, A/C system, etc.
- Lift Installation: Alignment Revised, Installation of Electric Devices and Relevant Accessories, etc.
- Internal Finishing: Plasterer Works, Installation of Wooden Doors, Waterproof in Building and Roof.
- Cable Laying: Excavation, Installation of Cable and Backfill, etc.

#### **CW-02**

- Superstructure Works, Builder's and Finishing Work, E&M work, Window and Door Installation and Fitting out Works at the New Bird House,
- Superstructure Works (Structural Steel Works) at the Flight Exercise Aviary,
- Make-good Defect Works at the Birds Central Kitchen,
- Surface Drainage Works at Main Aviary,
- Footing Construction Works and Superstructure Works at Astounding Asia Restaurant,
- Pipe Piling Works for Footing F1, MVAC Culvert (RC Works) and Superstructure Works (RC Works) at the New Panda Habitat,
- External Drainage, Services Pipelines and Ducting Works.

#### 4. Permits and License Status

##### 4.1. Environmental Permit

The Environmental Impact Assessment (EIA) Report of the Project has been approved by the Environmental Protection Department (EPD) (Register No.: AEIAR-101/2006) on 12 July 2006. Subsequently, EPD issued Environmental Permit (EP) for the construction and operation of the project. Table below is a full list of the EPs.

EP No.	Issue Date	Key Variation
EP-249/2006	28 July 2006	First EP
EP-249/2006/A	25 September 2006	<ul style="list-style-type: none"> <li>Enhance the roosting habitat for freshwater birds by enlarging Pond 35 and its surrounds with a total area of no less than 120 squares meters and no construction works and discharge from construction sites shall be allowed within Pond 35 after enhancement.</li> <li>Filling of Pond 37 at the Lowland Area.</li> <li>Submission of the as-built drawings showing the enhancement works of Pond 35.</li> </ul>

## 4.2. CNP

Table below shows a list of CNP within the reporting month.

Permit number	Starting Date	Expired Date	Valid Time	Location	Contract No.	Status
<b>CI-05 (DBJV)</b>						
GW-RS0786-07	11-Dec-07	10-Jun-08	<i>PME</i> 19:00 - 23:00 hours (not being a general holidays) 09:00 - 19:00 (General holidays) <i>PCW</i> 19:00 - 23:00 hour (Not being a general holidays) 09:00 - 19:00 (General holidays) One group of equipment shall be allowed in above time	Waterfront (Panda Access Ramp)	CI-05	Valid
GW-RS0787-07	11-Dec-07	10-Jun-08	<i>PME</i> 00:00 - 07:00 hours & 19:00 - 24:00 hours (Not being a general holidays) 00:00 - 24:00 (general holidays) <i>PCW</i> 00:00 - 07:00 hours & 19:00 - 24:00 hours (Not being a general holidays) 00:00 - 24:00 hours (General holidays) One group of equipment shall be allowed in above time.	Main tunnel excavation	CI-05	Valid
GW-RS0037-08	4-Feb-08	1-Mar-08	<i>PME</i> 00:00 - 07:00 hours and 19:00 - 24:00 (Not being a general holiday) 00:00 - 24:00 hours (General holidays) <i>PCW</i> 00:00 - 07:00 hours & 19:00 - 24:00 hours (Not being a general holidays) 00:00 - 24:00 hours (General holidays)	Crusher, Conveyor and Barging Point	CI-05	Expired
GW-RS0061-08	13-Feb-08	20-Aug-08	<i>PME</i> 00:00 - 07:00 hours & 19:00 - 24:00 hours (Not being a general holiday) 07:00 - 23:00 (General holidays) <i>PCW</i> 00:00 - 07:00 hours & 19:00 - 24:00 hours (Not being a general holidays) 07:00 - 23:00 (General holidays) One group of equipment shall be used.	Summit (At the top of Nam Long Shan Road)	CI-05	Valid



Permit number	Starting Date	Expired Date	Valid Time	Location	Contract No.	Status
GW-RS0063-08	15-Feb-08	14-Jul-08	<p><i>PME</i> 00:00- 07:00 hours &amp; 19:00 - 23:00 hours (not being a general holidays) 00:00 - 24:00 (General holidays)</p> <p><i>PCW</i> 00:00- 07:00 hours &amp; 19:00 - 23:00 hour (Not being a general holidays) 00:00 - 24:00 hours (General holidays)</p> <p>One group of equipment shall be allowed in above time Group C &amp; D shall not operated between 23:00-07:00 on the next day</p>	Upper Portion of Nam Long Shan Hill Road	CI-05	Valid
GW-RS0092-08	2-Mar-08	1-Sep-08	<p><i>PME</i> 19:00 - 23:00 hours (Not being a general holidays) 07:00 - 23:00 (General holidays)</p> <p><i>PCW</i> 19:00 - 23:00 hours (Not being a general holiday) 07:00 - 23:00 (general holidays)</p>	Crusher, Conveyor and Barging Point	CI-05	Cancelled
GW-RS0144-08	19-Mar-08	16-Sep-08	<p><i>PME</i> 19:00 - 23:00 hours (not being a general holidays) 07:00 - 19:00 (General holidays)</p> <p><i>PCW</i> 19:00 - 23:00 hour (Niot being a general holidays) 07:00 - 19:00 (General holidays)</p> <p>One group of equipment shall be allowed in above time</p>	Nam Long Shan Road near Chan Nam Cheong Memorial School	CI-05	Valid
GW-RS0151-08	18-Mar-08	17-Apr-08	<p><i>PME</i> 00:00 - 07:00 hours and 19:00 - 24:00 (Not being a general holiday) 00:00 - 24:00 hours (General holidays)</p> <p><i>PCW</i> 00:00 - 07:00 hours &amp; 19:00 - 24:00 hours (Not being a general holidays) 00:00 - 24:00 hours (General holidays)</p>	Crusher, Conveyor and Barging Point	CI-05	Valid

Permit number	Starting Date	Expired Date	Valid Time	Location	Contract No.	Status
<b>CS-01 (KAJV)</b>						
GW-RS0695-07	29-Oct-07	9-Apr-08	<i>PME</i> 19:00 - 23:00 hours (Not being a general holidays) 07:00 - 19:00 hours (General holidays) <i>PCW</i> 19:00 - 21:00 hours (Not being a general holidays) 08:00 - 17:00 hours (General holidays) One group of equipment shall be allowed in above time.	Summit (At top of Nam Long Shan Road)	CS-01	Valid
<b>CW-02 (W. Hing)</b>						
GW-RS0488-07	1-Sep-07	1-Mar-08	<i>PME</i> 19:00-23:00 (Not being a general holiday) 07:00-19:00 (general holiday)	Ocean Park, Wong Chuk Hang	CW-02	Expired
GW-RS0123-08	10-Mar-08	1-Sep-08	<i>PME</i> 19:00 - 23:00 hours (Not being a general holidays) 07:00 - 19:00 hours (General holidays)	Ocean Park, Wong Chuk Hang	CW-02	Valid

### 4.3. Other Permits & Licenses

Tables below show lists of other permits & license for individual contracts.

#### CI-05

Permit /Ref/ No	Valid Period		Section	Status
Notification of Construction Work under APCO				
001017998	-	-	Waterfront	Notified
001018054	-	-	Summit	Notified
Effluent Discharge License				
EP820/W9/XW232	20 Jun 07	30 Jun 12	Summit	Valid
EP820/W9/XW234	13 Jul 07	31 Jul 12	Waterfront	Valid
Specific Process License				
L-11-044 (1)	20-Sep-07	19-Sep-12	Conduct Specified Process in the premises at Ocean Park MRP Contract CI-05 (at top of Nam Long Shan Road)	Valid
Registration as Chemical Waste Producer				
WPN5213-199-D2373-01	7-May-07	-	For disposal of chemical wastes, mainly spent lubricants	Registered
Construction Waste Disposal Charging Scheme				
7004888	-	-	Waterfront + Summit	Issued

#### CS-01

Permit/Ref/No	Valid Period		Section	Status
Notification of Construction Work under APCO				
001018953	-	-	Vet Hospital	Notified
Effluent Discharge License				
EP820/W2/XC041	31 May 07	30 Jun 12	Vet Hospital	Valid
Registration as Chemical Waste Producer				
WPN5213-199-K2880-01	19 Mar 07	-	Used battery, used lubricating oil and lubricating oil / gasoline / diesel contaminated soil.	Registered
Construction Waste Disposal Charging Scheme				
7005185	-	-	Vet Hospital	Issued

#### CW-02

Permit/Ref/No	Valid Period		Section	Status
Notification of Construction Work under APCO				
001022480	11 July 07	-	Astounding Asia	Notified
Effluent Discharge License				
EP820/W9/XW240	12 Oct 07	31 Oct 12	Astounding Asia	Valid
Registration as Chemical Waste Producer				
5213-199-W2894-18	20 Aug 07	-	Form Oil, Lubricant oil, paint, solvent and diesel.	Registered
Construction Waste Disposal Charging Scheme				
7005864	-	-	Astounding Asia	Issued

## 5. EP Submissions Status

Environmental submissions to EPD since the commencement of construction works at Ocean Park, i.e. from 12 March 2007 to 25 March 2008 are as below,

Contract	Submissions
CI-05	<ul style="list-style-type: none"> <li>• Notification of Commencement Date</li> <li>• Management Organisation Chart</li> <li>• Construction Programme</li> <li>• Drainage Proposal</li> <li>• Silt Curtain Proposal</li> <li>• Waste Management Plan</li> <li>• Baseline Air Quality and Noise Monitoring Report</li> <li>• Transplantation Proposal for Uncommon Species</li> <li>• Baseline Coral Survey Report</li> <li>• As-built Drawings of Pond 35</li> <li>• Detailed Compensatory Planting As-built Drawing</li> </ul>
CI-05, CS-01 & CW-02	<ul style="list-style-type: none"> <li>• Combined Monthly EM&amp;A Report (February 2008)</li> </ul>
City Bus Limited	<ul style="list-style-type: none"> <li>• Written Notice on Completion of TPH Contaminated Soil Disposal</li> <li>• Written Notice on Completion of Solidification Treatment of Heavy Metals Contaminated</li> <li>• As-built Remediation Plan</li> </ul>
Hong Kong School of Motoring Ltd.	<ul style="list-style-type: none"> <li>• Confirmation Letter to confirm that Land Contamination remediation Works within HKSM has been completed</li> </ul>

## 6. Materials Management

Section 6.17 in the EIA report specified the disposal of materials to the public fill reception facilities should be considered as last resorts with the preferred approach to reuse the material within the project and/or other projects.

According to EIA recommendations and CI05-WMP, the materials were reused in other projects specified as below:

- TKOGV (Green Valley), the soil materials were reused as the topsoil of landfill. This would be delivered by DBJV subcontractor's trucks. The delivery was started in May 2007 and no excavated materials were delivered to TKOGV in the reporting month.
- NW-SW (Swire Sita), the soil materials were reused as the topsoil of landfill. This would be delivered by DBJV subcontractor's barges. The delivery was started in September 2007 and excavated materials were delivered to the site within the reporting period.
- Central Reclamation Phase III, the excavated materials were reused as forming an access road. This would be delivered by barges from the Contractor's of Central Reclamation Phase III. The delivery was started in November 2007 and excavated materials were delivered to the site within the reporting period.
- Ma On Shan Waterfront Promenade Project, the rock materials were reused as the seawall layer. This would be delivered by DBJV subcontractor's barges. The delivery was started in December 2007 and no rock materials were delivered to the site within the reporting period.
- Shenzhen Airport Extension, the rock materials (size less than 300mm) would be exported as usable materials by DBJV subcontractor's barges to the Shenzhen Airport Extension site for site formation works. The rock materials would be exported as goods in compliance with the Import and Export Ordinance. The delivery was started by the end of September 2007, however, no rock materials were delivered to Shenzhen Airport Extension in the reporting month.
- Hung Wan Quarry at Zhuhai, it was proposed to EPD on 8 November 2007 and no rock materials were delivered to Zhuhai within the reporting month for reuse purpose. This would be delivered by DBJV subcontractor's barges.

The amounts of different types of materials generated by the activities of the Project in the month are shown in following table. The total materials quantities of the project showed that the reuse of materials was maximized and the disposal to the public filling facilities was minimized. Mitigation measures under the Waste Management Plan (WMP) revision D have been implemented during the reporting period.

Materials Type	Disposal Locations	CI-05	CS-01	CW-02	Total
C& D Waste	SENT	479.75 tonnes	38.74 tonnes	36.22 tonnes	554.71 tonnes
	WENT	6.42 tonnes	--	--	6.42 tonnes
	TKOSF	128.14 tonnes	38.57 tonnes	25.17 tonnes	191.88 tonnes
	TMSF	12.30 tonnes	--	--	12.30 tonnes
Excavated Material (mainly soil)	QBBP	10,094.16 tonnes	79.93 tonnes	857.78 tonnes	11,031.87 tonnes
	TKOFB	--	8.74 tonnes	--	8.74 tonnes
	Alternative site (Central Reclamation Phase III)	385,813.27 tonnes	--	--	385,813.27 tonnes
	Alternative site (Swire Sita)	6,231.20 tonnes	--	--	6,231.20 tonnes
Chemical Waste	Collected by licensed collector	--	--	--	--
General Waste	Collected by licensed collector	58.0m <sup>3</sup>	--	--	58.0m <sup>3</sup>

## 7. Environmental Monitoring and Results

### 7.1. Requirements

Under EP-249/2006/A condition 3.2, impact environmental monitoring including sampling, measurements and necessary remedial action should be conducted in accordance with the requirements of the EM&A Manual. The environmental monitoring including air quality, noise and terrestrial ecology were conducted by the Contract of CI-05 within the reporting period.

The items below would not be described in Part 1 report and would be described in CI-05 monthly EM&A report (i.e. Part 2 of the report).

- Methodology and Criteria
- Action and Limit Levels
- Event and Action Plan



## 7.2. Monitoring Locations

### Air Quality (TSP)

The locations of the air monitoring stations are presented in the table below. The figure was shown in the CI-05 Monthly EM&A Report.

Air Quality Monitoring Stations	Identity/Description
AM1	Whisker's Theatre, Ocean Park
AM2	San Wai Village, Wong Chuk Hang
AM3A	Open Area of PMR & OPC temporary Site Offices (from 14 September 2007)

### Construction Noise

The locations of the noise monitoring stations are presented in the table below. The figure was shown in the CI-05 Monthly EM&A Report.

Noise Monitoring Stations	Identity/Description
CN1	Open Area adjacent to Police Training School
CN2	Project Development Office, Ocean Park
CN3	Rinniped House, Ocean Park
CN4	Manly Villa

### Terrestrial Ecology

Monitoring of the health and condition of the transplanted plant species of conservation interest should be conducted at least once a month during the first 12 month after transplantation. Proposed monitoring location would be next to the Contract CI-05 site office shown in figure 1.3 of Part 2 of the report.

### Coral

The locations of the coral monitoring stations are presented in the table below. The figure was shown in the CI-05 Monthly EM&A Report.

Coral Impact Monitoring Stations	Identity/Description
Site 1	Seaside near the Lowland
Site2 to Site 5	Around Headland
Control Station	Between Near Round Island and Chung Hom Kok

### 7.3. Monitoring Results

#### Air Quality (TSP)

The monitoring data reported below was provided by the CI-05 Contractor's Environmental Team Leader.

Monitoring Period	1-hr TSP ( $\mu\text{g}/\text{m}^3$ )		
	AM1	AM2	AM3A
26 February 08 to 25 March 08	83-229	97-314	148-427

Monitoring Period	24-hr TSP ( $\mu\text{g}/\text{m}^3$ )		
	AM1	AM2	AM3A
26 February 08 to 25 March 08	47-126	75-162	81-180

#### Construction Noise

The monitoring data reported below was provided by the CI-05 Contractor's Environmental Team Leader.

Monitoring Period	Daytime Noise Level, Leq (30min), dB(A)			
	CN1	CN2	CN3	CN4
26 February 08 to 25 March 08	66.5-70.2	59.5-67.0	58.4-60.0	64.2-70.1

Monitoring Period	Evening time Noise Level, Leq (15min), dB(A)			
	CN1	CN2	CN3	CN4
26 February 08 to 25 March 08	52.4-54.0	53.3-58.4	54.3-59.2	52.9-56.0

#### Terrestrial Ecology

The monitoring results showed that the survival rate of Sword-leaved Orchid was 100%. Most of the transplanted Balloon Flowers at the receptor site were experience seasonal shrunken and re-generated in the month which is the growing season. The survival rate of Balloon Flower was 80%. The above ground parts of the Chinese Lily were became withered due to natural seasonality in dry season while the underground roots are alive since all the Chinese Lily were geminated in the month which is the growing season. The survival rate of Chinese Lily was 100%. Detailed observations would be describes in CI-05 monthly EM&A report (i.e. in Appendix E of Part 2 of the report).

#### Coral

No impact coral monitoring was conducted within the reporting period. It was because no exceedance was recorded at all monitoring stations and control site in the past six months, therefore the monitoring frequency was changed to quarterly until the

end of construction works as recommended in approved EM&A Manual. The next scheduled monitoring should be in May 2008.

#### **7.4. Exceedances**

No exceedance was recorded on the 1-hour TSP monitoring, 24-hour TSP monitoring, daytime & evening time noise monitoring and terrestrial ecology monitoring for the reporting period. No impact coral monitoring was conducted within the reporting period since the monitoring frequency was changed to quarterly until the end of construction works. The next scheduled monitoring should be in May 2008.

### **8. Site Audit**

#### **8.1. IEC Site Audit**

IEC conducted monthly site audit on CI-05, CS-01 and CW-02 on 28 March 2008. Audit checklists are attached in Appendix A of Part I.

##### **CI-05 Observations**

###### **Observations for last month:**

Item 1, 2, 4-6 from the last audit were closed while item 3 was outstanding. Part of the access road at Summit was still accumulated with mud.

###### **Observations for the month:**

###### **Conveyor Crusher Area**

- (i) Settled water from sludge removed from the sedimentation tank was observed leaking and running down the slope.
- (ii) Conveyor-crusher connection point was observed dusty.

###### **Summit**

- (iii) A drip tray with oil tank was full of water.

###### **In Front of Hong Kong Police Training School**

- (iv) Stockpiles were not covered.
- (v) Concrete breaking was not provided with water spraying to suppress dust.

##### **CS-01 Observations**

- (i) Observation from last audit – item 1 was closed. Item 2 was outstanding. The temporary drainage channel was still blocked by rocks and sand. The Contractor should ensure that it was clear of blockage at all times.
- (ii) Stagnant water was observed around the Plant Block after rain. The Contractor should remove them regularly after heavy rain.
- (iii) The Sedimentation tank was full of water after rain. The Contractor should maintain the tank more frequently.
- (iv) Silty water was observed being discharged into existing surface channel. The Contractor should ensure discharge from site should be diverted and treated prior to discharge.

##### **CW-02 Observations**

- (i) All observations from the last audit were closed.
- (ii) Oil drums were not provided with drip trays at the Flight Exercise Aviary.
- (iii) Stockpile closed to the tree at New Panda Habitat was uncovered.
- (iv) Debris and leaves were accumulated along the permanent drainage channel at New Panda Habitat.
- (v) Exposed slope surfaces of stockpiles around New Panda Habitat were only partly covered.

## **8.2. Non-Compliance**

No non-compliances were recorded in March 2008.

## **9. Implementation status of Environmental Mitigation Measures**

Please see Part 2, Part 3 and Part 4 of the individual contractual reports for the details of the implementation of environmental mitigation measures.

## **10. Summary of Complaint, Summon or Prosecution**

6 complaints were received within the month of March 2008. 3 Complaints were received from resident at Broadview Court on 12, 13 and 20 March 2008 regarding to the noise nuisance of night works at Nam Long Shan Road. Investigation was conducted and the findings were that movable noise panels and noise shield were using during the night breaking works. The possible cause of the noise nuisance would be that the noise emitted through the gaps between the panels. The Contractor was reminded to ensure placing the panels properly in order to minimize the noise nuisance to the vicinity. Surveillance has been stepped up in order to ensure that timely actions could be taken to avoid any new complaints.

1 complaint was received on 15 March 2008 regarding to the dust nuisance at the crusher, conveyor area at Nam Long Shan Road. With regards to the complaint, action was taken as follows:

- Enhance the water spraying at the dropping outlet of the conveyor, especially the frequency, in order to minimize the dust nuisance to the vicinity.
- Installed modify sprinklers around the stockpile area.
- Surveillance was stepped up in order to ensure that timely actions could be taken to rectify any complaints.

Besides, the length of dust screen was extended to increase the coverage area of stockpile and water spraying at the dust screen was also enhanced to minimize the dust nuisance due to strong wind.

1 complaint was received on 19 March 2008 regarding to the noise from the temporary steel plates over the trenches at Nam Long Shan Road. With regards to the complaint, immediate action was taken and summarized as follows:

- Sufficient sandbags or rubber pad were provided before placing the temporary steel plates back to cover the trench.

The last complaint was received on 25 March 2008 from the Police Training School regarding the dust nuisance from the construction site to the school. With regards to the complaint, immediate action was taken and summarized as follows:

- The frequency of water spraying for the exposed areas was enhanced.

- Stockpiles would be covered by tarpaulin.

No summons or prosecution related to environmental issues was received or made against the Project in March 2008.

## 11. Future Issues

Key Issues to be considered in the coming month include:

### CI-05

- Noise from operating equipment and machinery on-site
- Maintenance of the silt curtain at Tai Shue Wan
- Construction waste management at the site area
- To implement dust suppression measures on dry surfaces especially crusher and conveyor area stockpiles and on dust generating activities.
- Provision of temporary drainage system, treatment to turbid water from activities, run-off before discharge.
- Avoid accumulation of mud on access road, at permanent and temporary channels, catchpits and sedimentation tanks.
- Avoid oil spillage on site.
- To provide wheel wash to all vehicles leaving the site

### CS-01

- Noise from operating equipment and machinery on-site.
- Avoid accumulation of mud at the sedimentation tank and blockage at the temporary channels.
- To implement dust suppression measures on dry surfaces and dusty works.
- To implement on-site cleanliness.
- To remove general refuse from the site regularly.

### CW-02

- Generation of dust from stockpiles, haul road and vehicular movement on-site.
- Noise from operation equipment and machinery on-site.
- Storage of chemicals/fuel and chemical waste/waste oil on site.
- Remove construction waste and general refuse from the site regularly.
- Avoid blockage of temporary channels on access and haul roads.
- To implement dust suppression measures on exposed soil surfaces and stockpiles.

## 12. Conclusion and Recommendation

### 12.1. Conclusion

Environmental impact monitoring was performed in March 2008. All monitoring results in the reporting month were checked and reviewed.

No exceedance was recorded on the 1-hour TSP monitoring, 24-hour TSP monitoring, daytime & evening time noise monitoring, terrestrial ecology monitoring for the reporting period. No impact coral monitoring was conducted within the reporting period. It was because no exceedance was recorded at all monitoring stations and control site in the past six months, therefore the monitoring frequency was changed to quarterly until the end of construction works as recommended in approved EM&A Manual. The next scheduled monitoring should be in May 2008.

No non-compliance from IEC, summons or prosecution related to environmental issues was made against the Ocean Park Master Redevelopment Project in the reporting period of March 2008.

6 complaints were received within the month of March 2008. 3 Complaints were received from resident at Broadview Court on 12, 13 and 20 March 2008 regarding to the noise nuisance of night works at Nam Long Shan Road. Investigation was conducted and the findings were that movable noise panels and noise shield were using during the night breaking works. The possible cause of the noise nuisance would be that the noise emitted through the gaps between the panels. The Contractor was reminded to ensure placing the panels properly in order to minimize the noise nuisance to the vicinity. Surveillance has been stepped up in order to ensure that timely actions could be taken to avoid any new complaints.

1 complaint was received on 15 March 2008 regarding to the dust nuisance at the crusher, conveyor area at Nam Long Shan Road. With regards to the complaint, action was taken as follows:

- Enhance the water spraying at the dropping outlet of the conveyor, especially the frequency, in order to minimize the dust nuisance to the vicinity.
- Installed modify sprinklers around the stockpile area.
- Surveillance was stepped up in order to ensure that timely actions could be taken to rectify any complaints.

Besides, the length of dust screen was extended to increase the coverage area of stockpile and water spraying at the dust screen was also enhanced to minimize the dust nuisance due to strong wind.

1 complaint was received on 19 March 2008 regarding to the noise from the temporary steel plates over the trenches at Nam Long Shan Road. With regards to the complaint, immediate action was taken and summarized as follows:

- Sufficient sandbags or rubber pad were provided before placing the temporary steel plates back to cover the trench.

The last complaint was received on 25 March 2008 from the Police Training School regarding the dust nuisance from the construction site to the school. With regards to the complaint, immediate action was taken and summarized as follows:

- The frequency of water spraying for the exposed areas was enhanced.
- Stockpiles would be covered by tarpaulin.



## 12.2. Recommendation

According to the environmental audit performed in the reporting month, the following recommendations are made:

### Air Quality Impact

- To prohibit any open burning on site.
- To recommend that the Contractors should regularly maintain the machinery and vehicles on site.
- To follow up any exceedance caused by the construction works.
- To monitor the implementation dust suppression measures on dry surfaces, at the crusher and conveyor belt area by the Contractors.
- To increase the water spraying at the truck loading area of the crusher and along haul road.

### Noise Impact

- To inspect the noise sources from inside and outside of the site.
- To follow up any exceedance caused by the construction works.
- To recommend that the Contractors should space out noisy equipment and position as far away as possible from sensitive receivers.
- To recommend the Contractors should have regular maintenance of vehicles and equipment used.

### Water Quality Impact

- To recommend that the Contractor of CI-05 should regularly maintain the silt curtains and make sure they are in the right positions and maintain their functionalities.
- To monitor whether open stockpiles of construction materials are covered by Contractors with tarpaulin or similar fabric during rainstorm.
- To remind the Contractor to fully implementation of the temporary drainage system and all sedimentation tank and WetSep should be fully operated.

### Waste/Chemical Management

- To check for any accumulation of waste materials or rubbish on site.
- To avoid any discharge of chemical waste or oil directly from the site.
- To regularly and properly collect, store and dispose of all waste types, including floating refuses around the silt curtain.

## **Appendix A**

### **Independent Environmental Checker's Site Inspection Records**

**Ocean Park Master Redevelopment Project**  
**Contract P007**  
**Independent Environmental Checker**  
**MONTHLY SITE INSPECTION CHECKLIST**

Inspection Date	28/03/2008	Time	09:30	Inspected By	EM: Terence Kong IEC: Florence Yuen Contractor: CI05: S. Tam CS01: A. Wong CW02: B. Lee
Site Location	CI05 CS01 CW02				

**Weather**

Condition	<input type="checkbox"/> Sunny	<input type="checkbox"/> Fine	<input checked="" type="checkbox"/> Overcast	<input type="checkbox"/> Drizzle	<input type="checkbox"/> Rain	<input type="checkbox"/> Storm	<input type="checkbox"/> Hazy
Temperature	22°C		Humidity	<input checked="" type="checkbox"/> High	<input type="checkbox"/> Moderate	<input type="checkbox"/> Low	
Wind	<input type="checkbox"/> Calm	<input checked="" type="checkbox"/> Light	<input type="checkbox"/> Breeze	<input type="checkbox"/> Strong	Direction <input type="text"/>		

		Close-out on last comments Y/N	N/A or not obs	Yes	No	Photo/Remarks
<b>Construction Noise</b>						
S2.18	Is a valid Construction Noise Permit (CNP) obtained for works during restricted hours?	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
S2.26	Good Site Practices:					
	• Are the operating plants well-maintained and serviced regularly?	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	• Are silencers or mufflers utilized on construction equipment? Are they properly maintained?	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	• Is the mobile plant sited far enough from NSRs?	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	• Are intermittently used machines and plants shut down between work periods?	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	• Is the plant known to emit noise strongly in one direction, if any, oriented to direct noise away from the NSRs?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
	• Is the stockpile or other structures utilized effectively, wherever practicable, in screening noise from the works?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
S2.27	Are suitable quiet plants adopted?	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
S2.28	Are movable barriers used for both movable PME and stationary PME?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
S2.29	Do the screening materials used achieve the predicted noise reduction?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
S2.30	Are the noisy works avoided during examination period of the nearby school?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
<b>Blasting Noise</b>						
S2.32	• Are the NSRs informed of the blasting work in advance?	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	

- Is sufficient time allowed for alerting all the potential NSRs prior to every blasting work?

		✓	
--	--	---	--

- Are proper procedures put in place to alert and minimise any startling effect on the staff working in Ocean Park?

		✓	
--	--	---	--

- Is the optimal amount of charge used evaluated for noise reduction?

		✓	
--	--	---	--

### ***Landscape and Visual***

#### **S3.10 Consideration on existing surrounding vegetation:**

- Are temporary tree nurseries set up?
- Is "no-intrusion zones" implemented?
- Is the existing vegetation protected from damage?
- Are hill fire prevention measures taken?
- Is dust and erosion controlled for exposed soil?
- Are the irrigation networks set up throughout the Establishment Period?
- Is Quarterly Report on existing trees to be retained or transplanted prepared by the Contractor?

	✓		
--	---	--	--

	✓		
--	---	--	--

		✓	
--	--	---	--

		✓	
--	--	---	--

		✓	
--	--	---	--

	✓		
--	---	--	--

	✓		
--	---	--	--

#### **S3.11 Consideration on appearance and view:**

- Is the appearance of hoardings suitable?
- Is the appearance of construction workers, plants/machines suitable?
- Are the screening and alignment of the temporary barging point and conveyor system suitable?
- Are the selected security floodlights suitable

		✓	
--	--	---	--

		✓	
--	--	---	--

		✓	
--	--	---	--

	✓		
--	---	--	--

### ***Ecology***

#### **S4.5 Transplantation:**

- Is the transplantation work supervised by a qualified botanist/horticulturalist in the ET?
- Are the transplanted plant species of conservation interest monitored during the first 12 months after transplantation?

		✓	
--	--	---	--

		✓	
--	--	---	--

#### **S4.7 Construction:**

- Is the runoff entering watercourses avoided by control measure, especially during heavy rain?
- Is the site runoff directed to regularly cleaned and maintained silt traps (or oil separators)?
- Are sediment traps included in drainage to collect and control construction run-off?
- Is suitable size silt traps or oil interceptor used?
- Is vegetation survey carried out to determine the feasibility and suitability of individual plants for transplantation?
- Are the trees located within the works area preserved suitably?
- Are individual plants of conservation interest transplanted prior to the construction phase?

		✓	
--	--	---	--

		✓	
--	--	---	--

		✓	
--	--	---	--

		✓	
--	--	---	--

		✓	
--	--	---	--

		✓	
--	--	---	--

		✓	
--	--	---	--

- Are the equipments and stockpiles placed in designated works areas and access routes selected on existing disturbed land to minimise disturbance to natural habitats? 

		✓	
--	--	---	--
- Are construction activities restricted to the work areas demarcated? 

		✓	
--	--	---	--
- Are waste skips provided to collect general refuse and construction wastes? 

		✓	
--	--	---	--
- Are the wastes disposed of timely and properly off-site? 

		✓	
--	--	---	--
- Is open burning on works sites prohibited? 

		✓	
--	--	---	--
- Are native plant species made use of as far as possible on newly formed land? 

	✓		
--	---	--	--

#### Construction Waste

S5.4

##### Good Site Practices

- Are arrangements made for collection and effective disposal of all wastes generated? 

		✓	
--	--	---	--
- Are the waste management and chemical handling procedures followed? 

		✓	
--	--	---	--
- Are sufficient waste disposal points provided? 

✓			
---	--	--	--
- Are the wastes disposed of regularly? 

		✓	
--	--	---	--
- Are appropriate measures taken to minimise windblown litter and dust during transportation of waste by either covering trucks or transporting wastes in enclosed containers? 

		✓	
--	--	---	--
- Are the drainage systems, sumps and oil interceptors regularly cleaned and maintained? 

			✓
--	--	--	---

cw02 @ P1050826

S5.5

##### Waste Reduction Measures:

- Is the C&D waste from demolition and decommissioning of existing facilities sorted to recover recyclable materials? 

		✓	
--	--	---	--
- Are different types of wastes segregated and stored in different containers, skips or stockpiles to enhance reuse or recycling and the proper disposal? 

		✓	
--	--	---	--
- Are aluminium cans segregated in labelled bins and collected by individual collectors for recycling? 

		✓	
--	--	---	--
- Are proper storage and site practices maintained to minimise the potential for damage or contamination of construction material? 

		✓	
--	--	---	--
- Are the construction materials planned and stocked carefully to avoid unnecessary generation of waste? 

		✓	
--	--	---	--

S5.7

##### General Refuse

- Is the general refuse stored in enclosed bins or compaction units separate from C&D material? 

		✓	
--	--	---	--
- Is the general refuse removed regularly by a waste collector? 

		✓	
--	--	---	--

S5.8

##### C&D Material

- Are the excavated materials from site formation of the expansion areas and tunnel construction for the funicular system reused on-site as backfilling material and for landscape works? 

		✓	
--	--	---	--
- Are the surplus rock and other inert C&D material disposed of at the public fill sites? 

		✓	
--	--	---	--
- Is a waste management plan prepared? 

		✓	
--	--	---	--

	• Is a recording system present for the record of amount of wastes generated, recycled and disposed?	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	• Is the trip-ticket system required in ETWB TCW No.31/2004 followed on site?	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
S5.9	<b>Chemical Wastes</b> Is chemical wastes generated from the works? And if yes,	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	• Is the Contractor registered as a Chemical Waste Producer?	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	• Are good quality containers used for separating and storing chemical wastes?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	CW02 ① P1050821 GT05 ③ P1050853
	• Are appropriate labels securely attached on each chemical waste container to indicate their corresponding chemical characteristics?	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	• Is the Contractor licensed to transport and dispose of the chemical wastes?	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	<b>Land Contamination</b>					
S6.11	• Is the contact of construction workers with contaminated materials minimised by using bulk earth-moving excavator equipment?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
	• Are appropriate cloth, personal protective equipment, hygiene and washing facilities provided to minimise exposure to any contaminated material?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
	• Is stockpiling of contaminated excavated materials avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
	• Is the use of contaminated soil for landscaping without proper treatment prohibited?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
	• Are vehicles containing excavated materials covered properly to limit potential dust emissions or contaminated wastewater runoff?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
	• Is the speed of the trucks carrying contaminated materials controlled?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
	• Are the necessary waste disposal permits obtained from appropriate authorities in according with Waste Disposal (Chemical Waste) (General) Regulation?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
	• Are silt removal facilities provided with retention time for silt/sand traps of 5 minutes under maximum flow conditions?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
	• Are the records maintained for quantity of wastes generated and disposal of?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
S6.12	<b>Remediation Process</b>					
	• Is biopile covered by tarpaulin or low permeable sheet to avoid dust emission?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
	• Is vented air from biopile treated by blower and carbon adsorption system before released to the atmosphere?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
	• Are the materials which may generate airborne dust emissions adequately wetted prior to and during the loading, unloading and handling operations?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
	• Are silencers installed at biopile blower to minimise noise impact?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
	• Are quiet plants such as generator and blower used for biopile?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	



- Are the mixing process and other associated material handling activities properly scheduled to minimise potential noise impact? 

	✓		
--	---	--	--
- Are impermeable liners placed at the bottom of biopile? 

	✓		
--	---	--	--
- Is leachate collection sump construction along the perimeter of biopile? 

	✓		
--	---	--	--
- Is the leachate recycled back to the biopile or truck away to Chemical Waste Treatment Centre for disposal? 

	✓		
--	---	--	--
- Is the mixing of contaminated soils and cement/water/other additive(s) undertaken at a solidification plant to minimise the potential for leaching? 

	✓		
--	---	--	--
- Is a concrete bund construction along the perimeter of the solidification/stabilisation area to prevent runoff? 

	✓		
--	---	--	--
- Are the loading, unloading, handling, transfer and storage of cement carried out in an enclosed system? 

	✓		
--	---	--	--
- Are the contaminated soils transported by roll-off trucks (containerisation)? 

	✓		
--	---	--	--
- Is temporary hoarding provided around the treatment area to minimise the visual impact? 

	✓		
--	---	--	--

#### Air Quality

S7.23

#### Good Site Practices

- Is watering carried out regularly with complete coverage to reduce dust emissions from exposed site surfaces and unpaved roads, particularly during dry weather? 

			✓
--	--	--	---

 CI05 ⑤ P1050865
- Is watering frequently carried out for particularly dusty construction areas, temporary stockpiles and areas close to ASRs? 

		✓	
--	--	---	--
- Are the aggregate or dusty material storage piles covered with their side enclosed to reduce emissions? Or if this is not practicable, is watering applied to aggregate fines? 

			✓
--	--	--	---

 CI05 ④ P1050864  
CW02 ② P1050824
- Is open stockpiles avoided or covered and placed far enough from the ASRs? 

			✓
--	--	--	---

 CW02 ④ P1050829
- Is the dropping height of material restricted to minimise the fugitive dust from unloading/loading? 

		✓	
--	--	---	--
- Is tarpaulin used to cover all dusty vehicle loads transported to, from and within the site? 

		✓	
--	--	---	--
- Are vehicle wheel and body washing facilities available at the exit points of the site? 

✓			
---	--	--	--
- Are wind shield and dust extraction units or similar dust mitigation measures provided at the loading points? If dust generation is likely during the process, particularly in dry seasons, is water sprinklers provided at the loading site? 

		✓	
--	--	---	--
- Do the vehicles comply with the recommended speed limit of 10 km/h on unpaved roads? 

		✓	
--	--	---	--
- Are dusty activities rescheduled during high-wind conditions? 

	✓		
--	---	--	--
- Are the routing of vehicles and positioning of construction plants at maximum possible distance from the ASRs? 

	✓		
--	---	--	--
- Is suitable buffer zone provided and work areas fenced off with hoarding (not less than 2.4m from ground level)? 

		✓	
--	--	---	--

S7.24

#### Drilling & Blasting

	• Is watering carried out on the exposed area after blasting?	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	• Is vacuum extraction drilling method used?	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	• Is the blasting process carefully sequenced?	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	• Is the firing of explosive carried out in the morning prior to opening of the Park?	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
S7.25	Crushing Plant					
	• Is water sprayed on the crusher?	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	• Are fabric filters installed for the crushing plant?	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	• Is chute or dust curtain used for controlling dust when transferring materials from crusher to the conveyors?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	CI05⑥ P1050857
S7.26	Barging Point & Conveyor Belt System					
	• Are the conveyors placed within enclosed structures?	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	• Is profiled steel cladding provided at two sides of loading point?	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	• Are dust suppression sprays installed and operated at the feeding inlet and outlet?	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	• Is the barging point placed within an enclosed structure incorporating an enclosed chute for material transfer to the barge?	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	• Is a flexible curtain hanged on the enclosed chute to prevent dust emission when excavated materials/rocks transported into the barge?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

#### Water Quality

S8.3	Site Run-off and Drainage					
	• Are all sewer and drainage connections sealed to prevent debris, soil, sand etc. from entering public sewer before commencing any site formation work?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
	• Are temporary ditches provided to facilitate runoff discharge into appropriate watercourses, via appropriate sized silt retention pond?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	CI05② P1050848 & P1050847
	• Are cut-off ditches provided for all major site clearance/excavation works where soils would be exposed to control runoff from the areas?	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	• Are channels, earth/concrete bunds and sand bags deployed to direct surface runoff?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	CS01③ P1050814 & P1050812
	• Are catchpits and perimeter channels constructed in advance of relevant site formation works?	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	• Are the boundaries of earthworks marked and surrounded by dykes or embankments for flood protection?	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	• Are sand/silt traps and sediment basins provided to remove sand/silt particles from runoff?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	CS01④ P1050807 & CS01② P1050811
	• Are silt removal facilities, channels and manholes maintained and deposited silt/grit removed regularly to ensure that these facilities are functioning properly at all times?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	CI05⑥ P1050864 & CW02② P1050824 & CW02④ P1050829
	• Are exposed soil surfaces covered?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
	• Is the water pumped out from foundation excavations discharged into silt removal facilities?	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	• Are exposed soil areas minimised to reduce potential for increased siltation and contamination of runoff?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	CI05① P1050840 & P1050841

- Are earthwork final surfaces well compacted and is subsequent permanent work or surface protection performed immediately?

		✓	
--	--	---	--

- Is the rainwater pumped out from trenches or excavation directed to silt removal facilities before discharge?

			✓
--	--	--	---

CS01① P1050808  
CS01③ P1050814 &  
P1050812

- Are open stockpiles of construction materials or construction wastes of more than 50m<sup>3</sup> covered with tarpaulin during rainstorm?

	✓		
--	---	--	--

In case of an excavation in rainy seasons:

- Is temporary exposed slope/soil surfaces covered by tarpaulin as far as practicable?

			✓
--	--	--	---

CI05④ P1050864  
CW02② P1050824  
CW02④ P1050829

- Are intercepting channels provided to prevent storm runoff from washing across exposed soil surfaces?

		✓	
--	--	---	--

- Are surface protection measures and arrangements implemented to prepare for arrival of a rainstorm?

	✓		
--	---	--	--

#### S8.4 Coral Sites

- Are enhanced (with the use of flocculants added) sand/silt removal facilities employed for treatment of runoff from the major excavation at the Summit?

		✓	
--	--	---	--

- Is a silt curtain system used to enclose the construction phase discharge point at Tai Shue Wan?

		✓	
--	--	---	--

- Are debris and refuse collected, handled and disposed of properly to avoid entering any nearby water bodies and public drainage system?

		✓	
--	--	---	--

- Are stockpiles of cement and other construction materials kept covered when not being used?

		✓	
--	--	---	--

- Are oils and fuels used and stored in designated areas which have pollution prevention facilities (Fuel tanks and storage areas provided with locks and sited on sealed areas, within bunds of a capacity equality to 110% of the storage capacity of the largest tank)?

		✓	
--	--	---	--

- Are temporary sanitary facilities, such as portable chemical toilets, employed on-site where necessary to hand sewage from the workforce? Is a licensed contractor employed for disposal of waste matter and maintenance of these facilities?

		✓	
--	--	---	--

- Is a reputable waste collector should be employed by the Contractor to remove general refuse from the site, separately from construction and chemical wastes, on a daily basis to minimize odour, pest and litter impacts. Burning of refuse on construction sites is prohibited by law?

		✓	
--	--	---	--

- Are aluminium cans recovered from the waste stream and collected separate labelled bins?

		✓	
--	--	---	--

- Are office wastes reduced through the recycling of paper?

		✓	
--	--	---	--

- Are training provided to workers on site cleanliness & waste management procedure?

		✓	
--	--	---	--

#### Cultural Heritage

- S10.6 If there is any work planned within one metre of the grave, is a one metre buffer zone provided around the grave and is the grave demarcated by temporary fence?

		✓	
--	--	---	--

#### Hazard to Life

##### S11.3 Good Site Practices:

- Is the area around the magazine free of vegetation?

		✓	
--	--	---	--

- Is the control of (small) fires planned and provided through the following?

- Weekly checking of fire fighting equipment and the on-site fire water tank level.

		✓	
--	--	---	--

- Daily checking of all critical safety equipment on vehicle, including the fire extinguishers.

		✓	
--	--	---	--

- Maintaining back-up means of fighting fire on the explosive vehicles.

		✓	
--	--	---	--

- Providing safety training for drivers and other personnel present during explosive delivery with regard to operating fire hydrants and fighting of explosive fires.

		✓	
--	--	---	--

- Is the magazine secured against unauthorised entry and theft of explosive through the following?

- Maintaining a list of persons authorised to enter the magazine and ensuring the list is available to the magazine security guard.

		✓	
--	--	---	--

- Activating an alarm system that limits times at which explosive can be removed from the magazine and connecting the system to central security station.

		✓	
--	--	---	--

- Incorporating "Duress code" function in the alarm system.

		✓	
--	--	---	--

- Maintaining alarm system in good condition.

		✓	
--	--	---	--

- Is the magazine security guard located separately from the magazine complex?

		✓	
--	--	---	--

- Is the communication maintained in emergency with the following measures?

- Providing non-hazardous electronic equipment for persons working within 60 m of detonators.

		✓	
--	--	---	--

- Ensuring availability of phone numbers for all key personnel.

		✓	
--	--	---	--

- If there is a typhoon signal no. 3 or above, or black rainstorm signal, are all operations at magazine and transport ceased?

	✓		
--	---	--	--

- Is the risk of detonators explosion on vehicle reduced during transit through the following?

- Ensuring that magazine within vehicle is lined.

		✓	
--	--	---	--

- Limiting off-site transport to 5 to 6 a.m. each day.

		✓	
--	--	---	--

- Escorting vehicles with separate security vehicle when using the public road.

		✓	
--	--	---	--

- Ensuring that UN 1.4B packaging of detonators remains intact until handed over at blasting site.

		✓	
--	--	---	--

- Is the fuel isolation switch available on vehicle to prevent fire spreading in case a fire breaks out?

		✓	
--	--	---	--

- Is an experienced driver with accident-free record employed for explosive vehicle and security escort?

		✓	
--	--	---	--

- Are the drivers checked for health before employing?

		✓	
--	--	---	--

- Are the vehicles regularly checked to maintain in good condition to reduce chance of accident due to breaking down?

		✓	
--	--	---	--

- Is the truck fuel fire escalating to cause explosion avoided through the following means?

- Ensuring that the Contractor is aware of the potential hazards to site.

		✓	
--	--	---	--

- Maintaining appropriate fire fighting equipment.			✓	
- Requiring the Contractor to plan and make emergency arrangements.			✓	
• Is spare/redundant fire fighting equipment provided?			✓	
• Can communications be maintained between two vehicles (drivers and security) during the trip to prevent collision of two explosive vehicles in case of an accident?			✓	
• Are the processes of checking of condition of drivers to suspend any driver of concern carried out?			✓	
Project specific measures:				
• Is the speed of vehicle limited along the Ocean Park portion of Nam Long Shan Road within 100 m of the explosives magazine to 25 km/hr?			✓	
• Is other contractors' use of the Ocean Park Internal service road restricted during delivery of explosives, i.e. 6 to 7 a.m?			✓	
• Is the Ocean Park guard required to call to the magazine guard on an hourly basis when explosives are stored in magazines?			✓	
• Is the evacuation of part or all of Ocean Park Headland Area arranged in case of the explosive magazine being engulfed in fire?			✓	
• Is the risk to the public from accidental initiation during charging and blasting limited by the following means?				
- Closing the Ocean Park from commencement of charging holes until completion of blasting each day.		✓		
- Arranging for relevant authorities to post notices to mariners – warning them of blasting operations and advising them to stay away from a strip 100m wide immediately to the east of Headland from commencement of charge holes until completion of blasting each day (i.e. 9 a.m).		✓		
- Not operating amusement rides in the event of accidental explosion until confirmed free of critical damage.		✓		
• If unexploded explosives are found in blasthole(s), is the opening of Ocean Park delayed or is part of the Ocean Park delayed when there are unspent explosives?		✓		
• Is the opportunity for arson/deliberate initiation of explosive reduced with the following means?				
- Paying attention to the security alert status from the Government.		✓		
- Developing a security plan to address high alert level.		✓		
• Is an emergency plan developed to address uncontrolled fire in magazine area?			✓	
• Is the transfer of explosives between 5 to 6 a.m agreed by Mines Division?			✓	
• Is the road surface along the explosive transportation route maintained?			✓	
• Are the contractor's driver and security escort tested in respect of safety plan? Is the route driven before the driver undertakes the first delivery of explosives?			✓	
• Is adequate space provided for the explosive vehicle to manoeuvre without reversing close to the magazine to limit			✓	

the likelihood of vehicle accident?

--	--	--	--

- Is lighting for explosive vehicles provided on temporary road(s)?

		✓	
--	--	---	--

S11.4

- Is ammonium nitrate emulsion (ANE) delivered outside of Park opening times?

		✓	
--	--	---	--

### Observations for last month

Item ① is closed.

- ④ Item ② is outstanding. The temporary drainage channel was still blocked by rocks and sand. The Contractor shall ensure that it is clear of blockage at all times.

### Observations for this month

after rain

- ① Stagnant water was observed around the Plant Block<sup>V</sup>. The Contractor shall remove them regularly after heavy rain.
- ② The sedimentation tank is full of water after rain. The Contractor shall maintain the tank more frequently.
- ③ Silty water was ~~being~~ observed being discharged into existing surface channel. The Contractor shall ensure discharges from site shall be diverted and treated prior to discharge.

IEC Representative

Environmental Manager

Contractor's  
Representative  
CS01

Florence Yuen

( Florence Yuen )

Terence Kong

( Terence Kong )

Am Hong

( Am Hong )

## Observations for last month

- Item ①, ②, ④, ⑤ and ⑥ were closed while Item ③ is outstanding.  
Summit  
① Part of the access road at Summit was still accumulated with mud.

### Observations for this month

#### Conveyor Crusher Area

- ② Settled water from sludge removed from sedimentation tank was observed leaking and running down the slope.

#### Summit

- ③ A drip tray with oil tank was full of water.

#### In front of Hong Kong Police Training School

- ④ Stockpiles were not covered.  
⑤ Concrete breaking was not provided with water spray to suppress dust.


#### Conveyor Crusher Area

- ⑥ Conveyor - crusher connection point was observed dusty.

IEC Representative

Environmental Manager


Contractor's  
Representative  
CI05

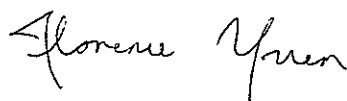

( Florence Yuen )



( Terence Kong )

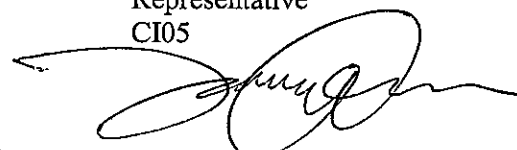

( SCHROEDER TAM )

Observations for last month

All observations from last month were closed.

Observations for this month

- ① Oil drums were not provided with drip trays at the Flight Exercise Aviary.
- ② Stockpile closed to the tree at New Panda Habitat was uncovered.
- ③ Debris and leaves were accumulated along the permanent drainage channel at New Panda Habitat.
- ④ Exposed slope surfaces of stockpiles around New Panda Habitat were only partly covered.

IEC Representative

Environmental Manager

Contractor's  
Representative  
CW02

Florence Yuen

( Florence Yuen )

Terence Kong







( Terence Kong )

Colin Lee








( Billy Lee )



**Ocean Park Master Redevelopment Project**  
**Contract P007**  
**Independent Environmental Checker**  
**MONTHLY SITE INSPECTION PHOTOS**





<b>Contract CI05 Site formation, Funicular Tunnel and Miscellaneous Works</b>	
<b>Follow up observations in February 2008</b>	
<b>Observation in last site inspection</b>	<b>Observation in this site inspection</b>
<b>Barging Point</b>	
 <p>P1050638: The flexible curtain at the outlet of the conveyor belt system was still partly damaged. The Contractor shall repair the damaged part as soon as possible to prevent dust emission.</p>	 <p>Closed – P1050861: The flexible curtain at the outlet of the conveyor belt system was repaired.</p>
<b>Summit Terminus</b>	
 <p>P1050611: Some of the rock breaking and excavation activities were still not provided with water spray to suppress dust. More water sprinklers shall be provided to ensure dust generated from all rock breaking and excavation activities were suppressed.</p>	 <p>Closed - P1050835: Water spray was generally provided to rock breaking activities at the Summit to suppress dust.</p>
<b>Nam Long Shan Road and Citybus Depot</b>	
	

**Ocean Park Master Redevelopment Project  
Contract P007  
Independent Environmental Checker  
MONTHLY SITE INSPECTION PHOTOS**

		
<p>P1050620 &amp; P1050646: The catchpit outlets within the site were blocked while a few gully pits were not provided with sandbags to divert the site runoff. The Contractor shall ensure discharge of muddy surface runoff into public drains be prohibited.</p>		<p>Closed - P1050866: The Contractor confirmed that the gully pits were no longer in use and were blocked.</p>
<b>Summit</b>		
		
<p>P1050595: Wheel wash facility was removed due to permanent works. The Contractor was reminded to provide wheel wash to all vehicles leaving the site during the construction phase.</p>		<p>Closed - P1050838: A temporary wheel wash facility was provided for providing wheel wash to all vehicles leaving the Summit.</p>
		
		
<p>P1050621 &amp; P1050622: The entire access road was accumulated with mud. The Contractor shall</p>		<p>P1050840 &amp; P1050841: Part of the access road was still accumulated with mud. The Contractor</p>

**Ocean Park Master Redevelopment Project  
Contract P007  
Independent Environmental Checker**




**MONTHLY SITE INSPECTION PHOTOS**

ensure the access road is clear of mud.		shall ensure that the entire access road is clear of mud.	
S Round			
			
P1050643: Exposed slope surface was not covered with tarpaulin or other means. The Contractor shall cover it with tarpaulin or other means to avoid surface runoff.		Closed - P1050862: Part of the exposed slope surface was covered while part of it was being excavated.	
Observations in March 2008			
Conveyor Crusher Area			
			
			
P1050848 & P1050847: Sludge removed from sedimentation tank was placed next to the sedimentation tanks. Settled silty water from these sludge ponds was observed leaking and running down the slope. The Contractor shall provide bunds to the sludge ponds to prevent any leakage and potential risk to surrounding water receiving bodies.		P1050853: A drip tray with an oil tank was full of water after rain. The Contractor shall provide maintenance to drip trays more frequently during the rainy season.	







**Ocean Park Master Redevelopment Project  
Contract P007  
Independent Environmental Checker**

**MONTHLY SITE INSPECTION PHOTOS**

		
<p>P1050857: Dust was observed generated from the connection point between the crusher and the conveyor. The Contractor shall ensure adequate water spray was provided and the crusher-conveyor system is fully enclosed.</p>		
<p><b>Hong Kong Police Training School</b></p>		
		
<p>P1050864: Stockpiles of construction materials were uncovered. The Contractor shall ensure all idle stockpiles on site were covered with tarpaulin sheets or other means.</p>		<p>P1050865: Concrete breaking activities was not operated with provision of water spray. The Contractor shall provide water spray during breaking operations to suppress dust.</p>

**Ocean Park Master Redevelopment Project  
Contract P007  
Independent Environmental Checker  
MONTHLY SITE INSPECTION PHOTOS**

Contract CS01 Back of House for Marine Mammal Veterinary Hospital	
Follow up observations in February 2008	
Observation in last site inspection	Observation in this site inspection
	
P1050575: Scrap material and general refuse was still scattered along the slope of Pool Block. The Contractor shall remove and dispose them properly.	Closed - P1050810: Scrap material and general refuse were removed from the site and disposed of regularly by the Contractor.
	
P1050572: The temporary drainage channel was still blocked by rocks and scrap materials. The Contractor shall ensure that it is clear of blockage at all times.	P1050807: The temporary drainage channel was still blocked by rocks and construction materials. The Contractor shall ensure that it is clear of blockage at all times.

**Ocean Park Master Redevelopment Project  
Contract P007  
Independent Environmental Checker  
MONTHLY SITE INSPECTION PHOTOS**

Observations in March 2008			
			
P1050808: Stagnant water was observed accumulated around the Plant Block after rain. The Contractor shall remove any stagnant water accumulated on site regularly especially during the raining season.		P1050811: Sedimentation tank was full after rain. The Contractor shall maintain the tank more frequently during the rainy season.	
			
			
P1050814 & P1050812: Silty water was observed being discharged into an existing surface channel. The Contractor shall ensure any discharge from site shall be diverted and treated to an acceptable quality prior to discharge.			

**Ocean Park Master Redevelopment Project  
Contract P007  
Independent Environmental Checker  
MONTHLY SITE INSPECTION PHOTOS**

Contract CW02 Astounding Asia	
Follow up observations in February 2008	
Observation in last site inspection	Observation in this site inspection
 	
<p>P1050557 &amp; P1050558: The permanent drainage channel at Flight Exercise Aviary was accumulated with sand and soil. The Contractor shall ensure the channel is clear of blockage at all times.</p>	<p>Closed - P1050820: The permanent drainage channel at Flight Exercise Aviary was clear of blockage.</p>
	
<p>P1050556: Exposed soil surfaces under the tree at New Panda Habitat was not covered with tarpaulin sheets or other means.</p>	<p>Closed - P1050827: Exposed soil surface under the tree at New Panda Habitat has been compacted.</p>



**Ocean Park Master Redevelopment Project  
Contract P007  
Independent Environmental Checker**

**MONTHLY SITE INSPECTION PHOTOS**

			
			
<p>P1050567 &amp; P1050570: Stockpiles of excavated materials located next to the Generator Room and between Main Aviary and AA Restaurant were not covered with tarpaulin sheets or other means. The Contractor shall cover them with tarpaulin sheets or other means properly.</p>		<p>Closed - P1050830: Stockpiles of excavated materials located next to the Generator Room was covered with tarpaulin while stockpiles between Main Aviary and AA Restaurant were being operated by an excavator.</p>	
			
<p>P1050569: Mud was accumulated on the access road and drainage channel between the Main Aviary and AA Restaurant. The Contractor shall remove the mud on the access road and any blockage of the drainage channel as soon as possible.</p>		<p>Closed - P1050830: Access road and drainage channel between the Main Aviary and AA Restaurant were demolished and no longer in use due to works.</p>	



**Ocean Park Master Redevelopment Project  
Contract P007  
Independent Environmental Checker  
MONTHLY SITE INSPECTION PHOTOS**

Observations in March 2008			
			
P1050821: Oil drums were placed on bare ground at the Flight Exercise Aviary. The Contractor shall provide drip trays to oil drums on site to avoid oil spillage or leakage.		P1050824: Stockpile located closed to the Tree at New Panda Habitat was uncovered. The Contractor shall cover it with tarpaulin or other means.	
			
P1050826: Debris and leaves were accumulated along the permanent drainage channel at New Panda Habitat. The Contractor shall ensure the permanent drainage channel is clear of blockage at all times.		P1050829: Exposed stockpiles along the boundary of the New Panda Habitat were partly covered. The Contractor shall ensure the stockpiles are covered entirely.	

**Part 2      CI-05 EM&A REPORTS (March 2008)**

**OCEAN PARK MASTER  
REDEVELOPMENT PROJECT**

**CONTRACT NO. CI05**

**SITE FORMATION, FUNICULAR TUNNEL  
AND MISCELLANEOUS WORKS**

**Monthly EM&A Report – March 2008**

**CLIENT:**

Ocean Park Corporation

OCEAN PARK, Aberdeen,  
Hong Kong


**PREPARED BY:**

Dragages-Bouygues J.V.

OCEAN PARK Aberdeen  
(top of Nam Long Shan Road)

Telephone: (852) 2552 0336


Facsimile: (852) 2552 1036

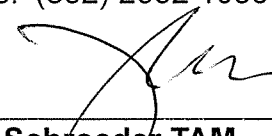

---

**Schroeder TAM**  
QSE Officer


**REVIEWED BY:**



---

**YT SO / Peter IP**  
Project QSE Manager / General Construction Manager

**AUTHORISED BY:**



---

**Seved ROBIN**  
Project Director

**DATE:**

03 April 2008

---

## TABLE OF CONTENTS

	Page
<b>EXECUTIVE SUMMARY</b>	<b>1</b>
<b>1. INTRODUCTION</b>	<b>1</b>
Purpose	1
Background	1
Project Organisation	2
Construction Works undertaken during the Reporting Month	2
Compliance with EP conditions	3
Summary of EM&A Requirements	3
<b>2. AIR QUALITY MONITORING</b>	<b>4</b>
Monitoring Requirements	4
Monitoring Equipment	4
Monitoring Parameters, Frequency and Duration	4
Monitoring Locations	4
Monitoring Methodology	5
Results and Observations	6
<b>3. NOISE MONITORING</b>	<b>7</b>
Monitoring Requirements	7
Monitoring Equipment	7
Monitoring Parameters, Frequency and Duration	7
Monitoring Locations	7
Monitoring Methodology	8
Results and Observations	8
<b>4. TERRESTRIAL ECOLOGY</b>	<b>10</b>
Monitoring Requirements	10
Monitoring Parameters, Frequency and Duration	10
Monitoring Locations	10
Monitoring Methodology	10
Results and Observations	10
<b>5. SUBTIDAL MONITORING</b>	<b>11</b>
Monitoring Requirement	11
Monitoring Parameters, Frequency, Schedule	11
Monitoring Locations	11
Monitoring Procedures	11
Results and Observations	11
<b>6. ENVIRONMENTAL AUDIT</b>	<b>12</b>
Site Environmental Audit	12
Review of Environmental Monitoring Procedures	12
Status of Environmental Licensing and Permitting	12
Implementation Status of Environmental Mitigation Measures	14
Implementation Status of Event/Action Plans	15
Implementation Status of Environmental Complaint Handling Procedures	15
<b>7. FUTURE KEY ISSUES</b>	<b>16</b>
Key Issues for the Coming Month	16
Monitoring Schedules for the Next Month	16

Construction Program for the Next 3 Months	16
<b>8. CONCLUSIONS AND RECOMMENDATIONS</b>	<b>17</b>
Conclusions	17
Recommendations	17

#### List of Tables

Table 1.1	Amounts of Material Generated in the reporting of <a href="#">March 2008</a> .....	2
Table 1.2	Environmental Permit Submission.....	3
Table 2.1	TSP Monitoring Equipment.....	4
Table 2.2	Air Quality Monitoring Parameters and Frequency.....	4
Table 2.3	Location of Air Quality Monitoring Stations .....	4
Table 2.4	Monitoring Results of 1-hr TSP .....	6
Table 2.5	Monitoring Results of 24-hr TSP .....	6
Table 3.1	Noise Monitoring Equipment.....	7
Table 3.2	Noise Monitoring Parameters, Period and Frequency.....	7
Table 3.3	Noise Monitoring Locations .....	7
Table 3.4	Monitoring Results of Daytime Noise.....	8
Table 3.5	Monitoring Results of Evening Noise .....	9
Table 6.1	Summary of Environmental Licensing and Permit Status.....	13

#### List of Figures

Figure 1.1	Project Organization
Figure 1.2	Layout of Work Site (Waterfront)
Figure 1.3	Layout of Work Site (Summit) and Location of Terrestrial Ecology Monitoring
Figure 1.4	Locations of Air Quality and Noise Monitoring Stations
Figure 5.1	Locations of Subtidal Monitoring Stations

#### List of Appendices

Appendix A	Action and Limit Levels
Appendix B	Environmental Monitoring Schedules
Appendix C	Air Quality Monitoring Results
Appendix D	Noise Monitoring Results
Appendix E	Terrestrial Ecology Monitoring Results
Appendix F	Subtidal Monitoring Results
Appendix G	Calibration Details
Appendix H	Summary of Environmental Mitigation Implementation Schedule
Appendix I	Event and Action Plans
Appendix J	Complaint Flow Diagram and Complaint Log
Appendix K	Construction Programme
Appendix L	Contacts of Key Environmental Personnel
Appendix M	Submission Review Record, if applicable

## EXECUTIVE SUMMARY

This is the [thirteen](#) monthly Environmental Monitoring and Audit (EM&A) report prepared by Dragages Bouygues JV (DBJV), the Contractor Environmental Team (CET), for the Ocean Park Master Redevelopment Project Contract CI05 – Site Formation, Funicular Tunnel and Miscellaneous Works. This report presents the results of EM&A works conducted in the reporting month of [March 2008](#) (from [26 February 2008](#) to [25 March 2008](#)).

In the reporting month, the following construction activities took place:

### Waterfront

- Soft Ground Tunnel Excavation;
- Waterfront Terminus Excavation – North;
- Waterfront Access Road (e.g. Trench Excavation, Temporary Road Diversion);
- Utilities Diversion (e.g. Storm Drainage, Watermain & Sewerage) at Entry Plaza Advance Work;
- Permanent Bus Terminus; and
- Works for Grand Aquarium Advance Works.

### Summit

- Main Tunnel Excavation;
- Tunnel Permanent Lining;
- Drill & Blast for Summit Site Formation;
- Excavation at Summit;
- Summit Terminus and FS Tank Building;
- Crusher and Conveyor Belts Operation.

### Tai Shue Wan

- Conveyor Belt and Barging Point Operation.

### Government Entrusted Works

- Excavation, Trial Pit Excavation, Construction of Manhole, Pipe Laying (e.g. sewer & water main), Road Surface Reinstatement and Backfilling at Nam Long Shan Road Entrusted Work; and
- Excavation, Construction of Manhole, Pipe Laying, Trial Pit Excavation, Construction of Sheet Piling and Backfilling at Wong Chuk Hang Road.

The total disposal volume to the Government facilities, including the barging point, public fill and the sorting facilities in the reporting month of [March 2008](#), was [10,094.16](#) tonnes, [0.00](#) tonnes and [140.44](#) tonnes while the volume to the landfills was [485.57](#) tonnes. Besides the total disposal volume to the alternative dumpsites - Swire Sita by barge was [6,231.20](#) tonnes and no internal transfer of excavated materials within the reporting month of [March 2008](#).

Apart from the above, DBJV has been a source to provide the excavated material to the Contractor of Central Reclamation Phase III and the volume was [385,813.27](#) tonnes.

Monitoring of 1-hour & 24-hour Total Suspended Particulates (TSP) and noise were performed and the results were checked and reviewed. Site inspections were conducted on weekly basis. The implementation of the environmental mitigation measures, Event and Action Plans and environmental complaint handling procedures were also checked.

## Environmental Monitoring Works

### Environmental Monitoring and Audit Progress

A summary of monitoring and audit activities conducted in the reporting period is listed below:

1-hour TSP monitoring	14 sessions for all air quality monitoring stations (AM1, AM2 and AM3A)
24-hour TSP monitoring	5 sessions for all air quality monitoring stations (AM1, AM2 and AM3A)
Daytime noise monitoring	4 sessions for all noise monitoring stations
Evening and night time noise monitoring	4 sessions for all noise monitoring stations
Holiday time noise monitoring	0 session for all noise monitoring stations
Terrestrial ecology monitoring	1 session
Subtidal monitoring	0 session
Joint environmental site inspection	5 sessions (include the IEC audit)

### Air Quality

The air quality monitoring results obtained in the reporting period of [March 2008](#) were audited for the compliance of the Action and Limit levels proposed in the Project Baseline Air Quality and Noise Monitoring Report (rev. B), which were issued in [March 2007](#) and the audit finding showed no exceedance was recorded.

### Noise

The noise monitoring results obtained in the reporting period of [March 2008](#) were audited for the compliance of the Action and Limit levels proposed in the Project Baseline Air Quality and Noise Monitoring Report (rev. B), which were issued in [March 2007](#) and the audit finding showed that no exceedance was recorded.

### Terrestrial Ecology

The terrestrial monitoring was conducted in the reporting period of [March 2008](#) and the finding showed that the transplanted plants were in good condition.

### Subtidal Monitoring

No impact subtidal ecology monitoring was conducted in the reporting period of [March 2008](#) since there was no exceedance recorded at all monitoring stations and control site and the monitoring frequency has been revised to once in every quarter until the end of construction period. The next scheduled monitoring should be in [May 2008](#).

### Environmental Licensing and Permitting

Permits granted to the Project include the Environmental Permit for the Project, Construction Noise Permits, Effluent Discharge License and Chemical Waste Producer. Information of these permits is provided in Table 6.1.

### Implementation Status of Environmental Mitigation Measures

Water hoses and water truck were deployed for the haul road watering and spraying at summit areas; water sprinklers were in operation in the necessary working areas. The Contractor was reminded to keep watering the haul road and working area surfaces once the surfaces are dry, especially during the dry seasons.

Anti-mosquito agent has been applied in the required Works Areas and cleaned up stagnant water regularly in order to reduce the possibility of mosquito breeding.

The updated temporary drainage system, including the drainage channels and wheel washing bay for both Summit and Waterfront have been installed and in use. The vehicle drivers were reminded to wash the vehicles before leaving the site.

Movable noise panels have stored on site and will use wherever necessary.

Chemical waste store was set and the disposal of chemical waste would be followed the procedures in WMP.

The disposal of C&D wastes by using both the Chits and trip tickets have been implemented in [March 2008](#). Most of the C&D materials were disposed of to the alternative dumpsite. Disposal to the temporary public filling barging point would be the last resort. The C&D waste was disposed of to the sorting facilities or landfill.

General wastes were collected by a waste skip near the temporary site office in a regular basis. The frontline staff was reminded to keep good housekeeping in order to avoid waste accumulation.

### **Environmental Non-conformance**

Six public complaints, no warning, summons or prosecution related to environmental issues was made against the Ocean Park Master Redevelopment Project Contract CI05 in the reporting period of [March 2008](#).

### **Future Key Issues**

Key issues to be considered in the coming month include:

- Noise from operating equipment and machinery on-site.
- Construction waste management at temporary construction waste area.
- Avoid accumulation of stagnant / muddy water on-site.
- To implement dust suppression measures on dry surfaces.
- Provision of treatment to turbid water (control the SS level) from activities on-site before discharge.



## 1. INTRODUCTION

### Purpose

- 1.1 The purpose of this report is to present the EM&A work carried out during [March 2008](#) (from [26 February 2008](#) to [25 March 2008](#)) with respect to Ocean Park Master Redevelopment Project Contract No. CI05 – Site Formation, Funicular Tunnel and Miscellaneous Works.

### Background

- 1.2 Ocean Park planned to upgrade and expand the existing area to meet the anticipated visitor demands and to position Ocean Park as a premium tourist attraction and a regional leader in the themed recreational and educational park experience.

- 1.3 The redevelopment works of Ocean Park will involve

- Civil infrastructure works including road works (including modifying sections of Ocean Park Road, which is a local distributor, around the existing bus terminus as shown in Figure 1.1), drain works, tunnelling and geotechnical works, bulk excavation and slope works, retaining structures, site clearance, decommissioning and demolition works, funicular railway, modify to bus terminus, taxi stands and associated facilities.
- Utilities works including power supply distribution, electrical substations, freshwater and saltwater reservoirs, water supply distribution, gas supply distribution, telecommunications network and distribution, landscape irrigation network, etc.
- Primary life support system works for animal keeping.
- Area development works including service roads, EVAs, external escalators, bridges and elevated walkways, external lighting.
- Parkwide systems works including signage, background music system, toilets facilities, guard sheds, first aid facilities, communications systems, CCTV systems and waste facilities.
- Landscape or theming works including exterior building facade treatment works, themed concrete pavement/ hardscape, soft landscaping, water and faux rockwork features, visual intrusion screens, area props and artwork, etc.
- Works for the attractions venues including animal exhibits, marine animal, terrestrial animal, aviaries, bird exhibits, individual life support systems for animal exhibits; and others non-animal related attractions, e.g. shipwreck play area, bamboo maze, etc.
- Installation of rides including thrill rides, round rides, water rides, kids rides, interactive rides, transportation rides, etc.
- Works for the venues including event halls, outdoor live show area, cinemas and bandstands.
- Works for the merchandise / retail facilities including souvenir stores, novelty stores, games arcade, photo shops, etc.
- Works for the food and beverage facilities including restaurants, bakery, food carts and kiosks.
- Back of house facilities including offices, break areas, warehouses, centralized facilities, operational facilities, etc.

### Project Organisation

- 1.4 Under the requirement of EM&A Manual and Environmental Permit, the environmental management team should be set up and the structure of the team is shown in Figure 1.1.
- 1.5 Meanwhile the contacts of key environmental personnel for this project are shown in Appendix L.

### Construction Works undertaken during the Reporting Month

- 1.6 The major construction activities undertaken in **March 2008** included Soft Ground Tunnel Excavation; Waterfront Terminus Excavation – North; Waterfront Access Road (e.g. Trench Excavation, Temporary Road Diversion); Utilities Diversion (e.g. Storm Drainage, Watermain & Sewerage) at Entry Plaza Advance Work; Permanent Bus Terminus; and Works for Grand Aquarium Advance Works.
- 1.7 At Summit, Main Tunnel Excavation from Adit to Summit and Waterfront; Tunnel Permanent Lining; Drill & Blast for Summit Site Formation; Excavation at Summit; Site Formation Works for Summit Terminus & FS Tank Building; and Crusher and Conveyor Belts Operation.
- 1.8 At Tai Shue Wan, Conveyor belt and barging point operation.
- 1.9 The entrusted works including Excavation, Trial Pit Excavation, Construction of Manhole, Pipe Laying (e.g. sewer & water main), Road Surface Reinstatement and Backfilling at Nam Long Shan Road Entrusted Work; and Excavation, Construction of Manhole, Pipe Laying and Backfilling at Wong Chuk Hang Road
- 1.10 Layout plan of the Project is provided in Figures 1.2 and 1.3.
- 1.11 The amounts of different types of material generated by the activities of the Project in the reporting month are shown in Table 1.1.

**Table 1.1 Amounts of Material Generated in the reporting of **March 2008****

Material Type	Delivery / Disposal Location	Estimated Amount (tonnes unless specified)
C&D waste	SENT	479.15
	WENT	6.42
	TKOSF	128.14
	TMSF	12.30
C&D material	Swire Sita *	6,231.20
	QBBP	10,094.16
	Central Reclamation Phase III *	385,813.27
	TKOFB	0.00
	INTL **	0.00
Chemical waste	Collected by licensed collector	0.00
General waste	Collected by licensed collector	58.00m <sup>3</sup>

Notes: \* denotes alternative dumpsite as disposal location.  
\*\* denotes internal transfer

### Compliance with EP conditions

- 1.12 A summary of the reporting requirement of compliance with EP conditions of Contract CI05 of the Project as of [March 2008](#) was listed in Table 1.2.

**Table 1.2 Environmental Permit Submission**

Environmental Permit Submission	EP-249/2006/A Condition No.	Status
Management Organization	2.3	Submitted on 15 December 2006.
Construction Programme	2.4	Submitted on 14 February 2007.
Drainage Proposal	2.13	Deposited in the EIAO Register Office for public inspection on 30 May 2007.
Silt Curtain Proposal	2.14	Deposited in the EIAO Register Office for public inspection on 01 March 2007.
Transplantation Proposal	2.20 (a)	Deposited in the EIAO Register Office for public inspection on 25 September 2007.
As-built drawing of transplantation	2.20 (b)	Deposited in the EIAO Register Office for public inspection on 31 October 2007.
Waste Management Plan	2.21	Deposited in the EIAO Register Office for public inspection on 25 September 2007.
Baseline Air Quality and Noise Monitoring Report	3.2	Submitted on 28 February 2007.
Baseline Coral Survey Report	3.2	Submitted on 16 June 2007.
Monthly EM&A Report for Feb '07	4.2	Submitted on 13 March 2008.

### Summary of EM&A Requirements

- 1.13 The EM&A programme requires environmental monitoring for air quality, noise, terrestrial ecology, subtidal and waste management. The EM&A requirements for each parameter are described in subsequent sections, including:
- All monitoring parameters;
  - Action and Limit levels for all environmental parameters;
  - Event-Action Plans;
  - Environmental mitigation measures and their implementation schedule;
  - Environmental requirements in contract documents.
- 1.14 The environmental licensing and permits are described in Section 6.
- 1.15 The advice on the implementation status of environmental protection and pollution control/mitigation measures is summarized in Section 6 of the Report.

## 2. AIR QUALITY MONITORING

### Monitoring Requirements

- 2.1 24-hour & 1-hour TSP monitoring was conducted to monitor the air quality. Appendix A shows the established Action/Limit Levels for the air quality monitoring works.

### Monitoring Equipment

- 2.2 High volume samplers (HVS - Model GMWS-2310 Accu-Vol) complete with the appropriate sampling inlets were installed for 24-hour and 1-hour TSP sampling. The HVS composed of a motor, a filter holder, a flow controller and a sampling inlet and its performance specification complies with USEPA Standard Title 40, Code of Federation Regulations Chapter 1 (Part 50 Appendix B). Table 2.1 summarises the equipment that was used in the dust-monitoring programme.

**Table 2.1 TSP Monitoring Equipment**

Equipment	Model
HVS	GMWS 2310 c/w of TSP sampling inlet
Calibration Kit	Tisch TE-5025 A
Dust Trak	TSI-8250

### Monitoring Parameters, Frequency and Duration

- 2.3 The monitoring parameters and frequency are summarised in Table 2.2. The monitoring schedule for the reporting month is shown in Appendix B.

**Table 2.2 Air Quality Monitoring Parameters and Frequency**

Location	Parameter	Duration	Frequency
AM1	1-hour TSP	1 hour	3 times every 6 days*
	24-hour TSP	24 hours	Once every six days
AM2	1-hour TSP	1 hour	3 times every 6 days*
	24-hour TSP	24 hours	Once every six days
AM3A	1-hour TSP	1 hour	3 times every 6 days*
	24-hour TSP	24 hours	Once every six days

Notes: \* denotes three 1-hr TSP monitoring in three days.

### Monitoring Locations

- 2.4 In accordance with the EM&A Manual, three air quality monitoring stations, as shown in Figure 1.4, were selected for 24-hour and 1-hour TSP sampling. Table 2.3 describes the location of the air quality monitoring stations.

**Table 2.3 Location of Air Quality Monitoring Stations**

Air Quality Monitoring Stations	Identity / Description
AM1	Whisker's Theatre, Ocean Park
AM2	San Wai Village, Wong Chuk Hang
AM3A	Open areas of PMR & OPC temporary site offices

## **Monitoring Methodology**

### **24-hour / 1-hour TSP Monitoring**

#### ***Installation***

2.5 The HVSs were installed in the vicinity of the air sensitive receivers. The following criteria were considered in the installation of the HVS.

- A horizontal platform with appropriate support to secure the samplers against gusty wind was provided.
- No two HVSs were placed less than 2 meters apart.
- The distance between the HVS and any obstacles, such as buildings, was at least twice the height that the obstacle protrudes above the HVS.
- A minimum of 2 meters separation from walls, parapets and penthouses was required for rooftop samplers.
- No furnace or incinerator flues were nearby.
- Airflow around the sampler was unrestricted.
- Permission was obtained to set up the samplers and to obtain access to the monitoring stations.

#### ***Preparation of Filter Papers by ETS-Testconsult Limited.***

- Glass fibre filters, G810 were labeled and sufficient filters that were clean and without pinholes were selected.
- All filters were equilibrated in the conditioning environment for 24 hours before weighing. The conditioning environment temperature was around 25 °C and not variable by more than  $\pm 3$  °C; the relative humidity (RH) was < 50% and not variable by more than  $\pm 5$ %. A convenient working RH was 40%.

#### ***Field Monitoring***

- The power supply was checked to ensure the HVS works properly.
- The filter holder and the area surrounding the filter were cleaned.
- The filter holder was removed by loosening the four bolts and a new filter, with stamped number upward, on a supporting screen was aligned carefully.
- The filter was properly aligned on the screen so that the gasket formed an airtight seal on the outer edges of the filter.
- The swing bolts were fastened to hold the filter holder down to the frame. The pressure applied should be sufficient to avoid air leakage at the edges.
- Then the shelter lid was closed and was secured with the aluminum strip.
- The HVS was warmed-up for about 5 minutes to establish run-temperature conditions.
- A new flowrate record sheet was set into the flow recorder.
- The flow rate of the HVS was checked and adjusted at around 1.1 m<sup>3</sup>/min. The range specified in the EM&A Manual was between 0.6-1.7 m<sup>3</sup>/min.
- The programmable timer was set for a sampling period of 24 hrs  $\pm$  1 hr or 1 hr + 0.25 hr, and the starting time, weather condition and the filter number were recorded.
- The initial elapsed time was recorded.
- At the end of sampling, the sampled filter was removed carefully and folded in half-length so that only surfaces with collected particulate matter were in contact.
- It was then placed in a clean plastic envelope and sealed.
- All monitoring information was recorded on a standard data sheet.
- Filters were sent to *ETS-Testconsult Ltd.* for analysis.

### **Maintenance & Calibration**

- The HVSs and their accessories are maintained in good working condition, such as replacing motor brushes routinely and checking electrical wiring to ensure a continuous power supply.
- HVSs are calibrated at bi-monthly intervals using GMW-25 Calibration Kit throughout all stages of the air quality monitoring. Calibration details are provided in Appendix G.

### **Results and Observations**

- 2.6 The air quality monitoring results of 1-hr TSP and 24-hr TSP of the reporting month are summarized in Tables 2.4 and 2.5. All monitoring data and graphical presentation of the monitoring results are provided in Appendix C.
- 2.7 All measured 1-hour & 24-hour TSP concentrations were below the Action and Limit (AL) Levels in the reporting month.

**Table 2.4 Monitoring Results of 1-hr TSP**

Date of Monitoring	1-hr TSP ( $\mu\text{g}/\text{m}^3$ )		
	AM1	AM2	AM3A
27-Feb-08	121	154	269
29-Feb-08	125	171	339
03-Mar-08	179	158	231
05-Mar-08	229	314	427
06-Mar-08	223	293	342
07-Mar-08	83	97	148
10-Mar-08	146	171	357
12-Mar-08	154	265	327
14-Mar-08	120	154	150
17-Mar-08	146	175	271
18-Mar-08	92	103	149
19-Mar-08	164	199	221
20-Mar-08	139	174	241
25-Mar-08	146	125	260

Notes: \* Exceedance of Limit Level  
# Exceedance of Action Level

**Table 2.5 Monitoring Results of 24-hr TSP**

Date of Monitoring	24-hr TSP ( $\mu\text{g}/\text{m}^3$ )		
	AM1	AM2	AM3A
29-Feb-08	126	108	180
06-Mar-08	95	162	98
12-Mar-08	47	75	81
18-Mar-08	82	119	130
25-Mar-08	81	98	118

Notes: \* Exceedance of Limit Level  
# Exceedance of Action Level

### 3. NOISE MONITORING

#### Monitoring Requirements

- 3.1 Noise monitoring was conducted at four monitoring stations as specified in the EM&A Manual. Appendix A shows the established Action and Limit Levels for noise.

#### Monitoring Equipment

- 3.2 Integrating Sound Level Meters were employed for noise monitoring. They were Type 1 sound level meters capable of giving a continuous readout of the noise level readings including equivalent continuous sound pressure level (Leq) and percentile sound pressure level (Lx). They comply with International Electrotechnical Commission Publications 651:1979 (Type 1) and 804:1985 (Type 1). Portable electronic wind speed indicator capable of measuring the wind speed in m/s was employed to check the wind speed. Table 3.1 details the noise monitoring equipment used.

**Table 3.1 Noise Monitoring Equipment**

Equipment	Model
Integrating Sound Level Meter	Rion NL 31
Calibrator	Rion NC-73
Portable Wind Speed Indicator	TSI Model 8340-M Air Velocity Meter

#### Monitoring Parameters, Frequency and Duration

- 3.3 Noise monitoring was conducted per monitoring day during the daytime. Monitoring to be conducted in the evening and/or night-time only when construction works is in progress. The monitoring period, duration, parameters and frequency of noise measurement are presented in Table 3.2. The monitoring schedule for the reporting month is provided in Appendix B.

**Table 3.2 Noise Monitoring Parameters, Period and Frequency**

Time Period	Duration (min)	Parameters	Frequency
Daytime (0700 to 1900)	30	Leq	Once a week
*Evening (1900 to 2300)	5		
*Night-time (2300 to 0700 of next day)	5		

Notes: \* denotes Noise monitoring to be conducted only when construction work is in progress.

#### Monitoring Locations

- 3.4 In accordance with the EM&A Manual, noise monitoring was conducted at four designated monitoring stations as shown in Figure 1.4. Table 3.3 describes the locations of these monitoring stations.

**Table 3.3 Noise Monitoring Locations**

Noise Monitoring Stations	Identity / Description
CN1	Open Area adjacent to Police Training School
CN2	Project Development Office, Ocean Park
CN3	Rinniped House, Ocean Park
CN4	Manly Villa

## Monitoring Methodology

### Field Monitoring

- The Sound Level Meter was set on a tripod at a height of 1.2 m above the ground.
- For free field measurement, the meter was positioned away from any nearby reflective surfaces. For reference, a correction of +3dB(A) was made to the free field measurements.
- The battery condition was checked to ensure the correct functioning of the meter.
- Parameters such as frequency weighting, the time weighting and the measurement time were set as follows:
  - frequency weighting : A
  - time weighting : Fast
  - time measurement : 30 minutes / 5 minutes
- Prior to and after each noise measurement, the meter was calibrated using a Calibrator for 94 dB at 1000 Hz. If the difference in the calibration level before and after measurement was more than 1 dB(A), the measurement would be considered invalid and repeat of noise measurement would be required after re-calibration or repair of the equipment.
- The wind speed was frequently checked with a portable wind meter.
- During the monitoring period, the  $L_{eq}$  was recorded. In addition, site conditions and noise sources were recorded on a standard record sheet.
- Noise measurement was paused during periods of high intrusive noise (e.g. dog barking, helicopter noise) if possible. Observations were recorded when intrusive noise was unavoidable.
- Noise monitoring was cancelled in the presence of fog, rain, wind with a steady speed exceeding 5 m/s, or wind with gusts exceeding 10 m/s.

### Maintenance and Calibration

- The microphone head of the sound level meter and calibrator is cleaned with soft cloth at quarterly intervals.
- The meters and calibrators are sent to *Hong Kong Calibration Ltd* to check and calibrate at yearly intervals. Calibration details are provided in Appendix G.

### Results and Observations

- 3.5 Noise monitoring was conducted at the 4 designated monitoring stations during daytime in the reporting month. The monitoring was carried out as scheduled in the reporting month of [March 2008](#) and the monitoring results are summarized in Table 3.4. All monitoring data and graphical presentation of the monitoring results are provided in Appendix D.
- 3.6 No exceedance of limit level during daytime recorded in the reporting month.

**Table 3.4 Monitoring Results of Daytime Noise**

Date of Monitoring	Noise Level, $L_{eq}$ (30-min), dB(A)			
	CN1	CN2	CN3	CN4
03-Mar-08	68.1	60.4	59.2	70.1
10-Mar-08	70.2	61.1	58.4	65.1
17-Mar-08	66.5	67.0	60.0	64.2
25-Mar-08	67.7	59.5	58.8	68.0

Notes: \* Exceedance of Limit Level  
# Exceedance of Action Level



**Table 3.5 Monitoring Results of Evening Noise**

Date of Monitoring	Noise Level, Leq (15-min), dB(A)			
	CN1	CN2	CN3	CN4
27-Feb-08	53.2	55.3	55.4	54.0
05-Mar-08	52.4	53.3	54.8	52.9
12-Mar-08	54.0	58.4	59.2	56.0
19-Mar-08	53.5	56.2	54.3	55.3

Notes: \* Exceedance of Limit Level  
# Exceedance of Action Level

#### **4. TERRESTRIAL ECOLOGY**

##### **Monitoring Requirements**

- 4.1. Monitoring of the health and condition of the transplanted plant species of conservation interest should be monitored at least once a month during the first 12 months after transplantation.

##### **Monitoring Parameters, Frequency and Duration**

- 4.2. The health condition of the transplanted plant has been investigated within the reporting month of [March 2008](#).

##### **Monitoring Locations**

- 4.3. The proposed monitoring location is shown in Figure 1.3.

##### **Monitoring Methodology**

- 4.4. The monitoring methodology would be as follows:
- Check and control pests;
  - Check and control exotic plants;
  - Adding soil to compensate soil erosion by rain and run off; and
  - Provide fertiliser.

##### **Results and Observations**

- 4.5. The monitoring results showed that all transplanted plants were in good condition. All the transplanted Sword-leaved Orchids were healthy. Most of the transplanted Balloon Flowers at the receptor site were experience seasonal shrunken and re-generated in the current growing season.
- 4.6. Due to the natural seasonality in the dry season, the above ground part of the Chinese Lily were became withered while the underground roots are alive. Conclusion was made with all of the Chinese Lily were geminated in the current growing season and were identified during the monitoring in March 2008.

## 5. SUBTIDAL MONITORING

### Monitoring Requirement

- 5.1 Even though the conclusion in the EIA stated that adverse impact on coral communities would not be expected during the construction phase of the Project, coral monitoring shall be conducted as a precautionary measure.
- 5.2 Appendix A shows the established Action/Limit Levels for the subtidal monitoring works.

### Monitoring Parameters, Frequency, Schedule

- 5.3 Subtidal monitoring is required to be conducted as follows:
- once per month in the first two months in Site 1, Site 2, Site 3, Site 4 and Control Site C.
  - twice a month at first three months in Site 5 and Control Site C.
  - once per month for the next three months in Site 5 and Control Site C.
  - If there is no exceedance, the monitoring frequency would be adjusted to once every three months (i.e. quarterly) until the end of the Contract No CI05 of the Project.

### Monitoring Locations

- 5.4 In accordance with the EM&A Manual, subtidal monitoring would be conducted at Tai Shue Wan and Chung Hom Kok. The monitoring locations are shown in Figure 5.1.

### Monitoring Procedures

- 5.5 Monitor the tagged corals (ten nos. at each station) for sedimentation, bleaching and mortality.
- 5.6 In the event that there is no exceedance record, the monitoring frequency shall be revised to once in every quarter until the end of the construction phase of CI05.
- 5.7 In the event that there is an exceedance of Action Level record, more frequent monitoring to be carried out until the exceedance stops.
- 5.8 In the event that there is an exceedance of Limit Level record, the Contractor shall suspend all works until an effective solution is identified.

### Results and Observations

- 5.9 No impact subtidal ecology monitoring was conducted in the reporting period of [March 2008](#) since there was no exceedance recorded at all monitoring stations and control site and the monitoring frequency has been revised to once in every quarter until the end of construction period. The next scheduled monitoring would be in [May 2008](#).

## 6. ENVIRONMENTAL AUDIT

### Site Environmental Audit

- 6.1 Site audit would be carried out once per week to monitor environmental issues on the construction sites to ensure that all mitigation measures were implemented timely and properly.

### Review of Environmental Monitoring Procedures

- 6.2 The monitoring works conducted by the monitoring team were inspected regularly. The following observations have been recorded for the monitoring works:

#### *Air Quality Monitoring*

- The monitoring team recorded all observations around the monitoring stations within and outside of the construction site.
- The monitoring team recorded the temperature, air pressure and weather conditions on the monitoring day.

#### *Noise Monitoring*

- The monitoring team recorded all observations around the monitoring stations, which might affect the monitoring result.
- Major noise sources were identified and recorded. Other intrusive noise attributing to the result was trimmed off by pausing the monitoring temporarily.

#### *Terrestrial Monitoring*

- The [seventh](#) monitoring has been conducted in the reporting month of [March 2008](#) to check the health condition of the transplanted plants.

#### *Subtidal Monitoring*

- No impact subtidal ecology monitoring was conducted in the reporting period of [March 2008](#) since there was no exceedance recorded at all monitoring stations and control site and the monitoring frequency has been revised to once in every quarter until the end of construction period. The next scheduled monitoring would be in [May 2008](#).

### Status of Environmental Licensing and Permitting

- 6.3 All permits/licences obtained as of [March 2008](#) are summarised in Table 6.1.

**Table 6.1 Summary of Environmental Licensing and Permit Status**

Permit No.	Valid Period		Section/Description	Status
	From	To		
Environmental Permit				
EP-249/2006/A	23-Oct-06	N/A	Add a new condition before Condition 2.18 in Part C stated that "To compensate for the loss of roosting site for freshwater birds due to the filling of Pond 37 at Lowland area; complete the enhancement works for Pond 35 and to avoid disturbing the roosting site for freshwater birds, no construction works and discharge from the construction site(s) shall be allowed with the existing freshwater ponds at Tai Shue Wan area".  Renumber Conditions 2.19 to 2.25 in Part C of the EP.	Valid
Construction Noise Permits				
GW-RS0768-07	30 Nov 07	29 May 08	Breaker, min-robot mounted; Excavator, mini-robot mounted; Light goods vehicle, GVW ≤ 5.5 tonnes; Air compressor, with noise emission label showing SWL ≤ 100dB(A); Breaker, hand-held (electric), mass ≤ 10kg; Concrete lorry mixer; Compactor, vibratory; Mini-compacting roller; Welding generator and Lorry with crane.	Surrendered
GW-RS0786-07	11 Dec 07	10 Jun 08	Concrete lorry mixer; Poker, vibrating, hand-held (electric); Excavator, tracked; Generator, silenced, 75dB(A) at 7m; Crane, mobile (diesel); Excavator, tracked; Roller, vibratory; Breaker, hand-held, mass ≤ 10kg; Cutter, circular, steel (electric); Lorry with crane.	Valid
GW-RS0787-07	11 Dec 07	10 Jun 08	Ventilation fan; Excavator, tracked; Shotcrete machine; Concrete lorry mixer; Hydraulic drill; Cherry picker; Welding set; Air compressor, with noise emission label showing SWL ≤ 102dB(A); Loader, wheeled.	Valid
GW-RS0037-08	04 Feb 08	01 Mar 08	Crushing Plant; Dump trucks; Conveyor belt and Excavator, tracked.	Surrendered
GW-RS0061-08	13 Feb 08	20 Aug 08	Generator, silenced, 75dB(A) at 7m; Excavator, tracked; Dump truck; Emulsion pump truck; Light tower; and Crawler crane.	Valid
GW-RS0063-08	15 Feb 08	14 Jul 08	Breaker, min-robot mounted; Excavator, mini-robot mounted; Light goods vehicle, GVW ≤ 5.5 tonnes; Air compressor, with noise emission label showing SWL ≤ 100dB(A); Breaker, hand-held (electric), mass ≤ 10kg; Concrete lorry mixer; Compactor, vibratory; Mini-compacting roller; Welding generator and Lorry with crane.	Valid
GW-RS0092-08	02 Mar 08	01 Sep 08	Crushing Plant; Dump trucks; Conveyor belt and Excavator, tracked.	Surrendered
GW-RS0151-08	18 Mar 08	17 Apr 08	Crushing Plant; Dump trucks; Conveyor belt and Excavator, tracked.	Valid

**Table 6.1 Summary of Environmental Licensing and Permit Status**

Permit No.	Valid Period		Section/Description	Status
	From	To		
Construction Noise Permits				
GW-RS0144-08	19 Mar 08	16 Sep 08	Breaker, min-robot mounted; Excavator, mini-robot mounted; Light goods vehicle, GVW ≤ 5.5 tonnes; Air compressor, with noise emission label showing SWL ≤ 100dB(A); Breaker, hand-held (electric), mass ≤ 10kg; Compactor, vibratory; Mini-compacting roller; Welding generator and Lorry with crane.	Valid
Chemical Waste Producer Registration				
WPN5213-199-D2373-01	07-May-07	N/A	For disposal of chemical wastes, mainly spent lubricants	Valid
Effluent Discharge License				
EP820/W9/XW232	20-Jun-07	30-Jun-12	For discharge of industrial trade effluent arising from construction site at Summit and Tunnel	Valid
EP820/W9/XW234	13-Jul-07	31-Jul-12	For discharge of industrial trade effluent arising from construction site at Waterfront	Valid
Specific Process License				
L-11-044 (1)	20-Sep-07	19-Sep-12	Conduct Specified Process, viz., Mineral Works, in the premises at “Ocean Park Master Redevelopment Project Contract CI05 – Site Formation, Funicular Tunnel and Miscellaneous Works, Ocean Park, Aberdeen, Hong Kong (at top of Nam Long Shan Road)”	Valid
Notification of Construction Works under APCO				
Waterfront sent on 31-Jan-07 (ref. 001017998)				
Summit sent on 05-Feb-07 (ref. 001018054)				
Billing Account under Construction Waste Disposal Charging Scheme				
7004888	03-Jan-07	18-Dec-08	For disposal of C&D waste to public fills, sorting facilities and landfills	In use

**Implementation Status of Environmental Mitigation Measures**

- 6.4 The weekly joint site inspections have conducted on [29 February 2008](#); [07, 14 and 20 March 2008](#). The IEC has undertaken the monthly audit on [29 March 2008](#) and the observations and recommendations that were made have still summarized in the following even though the audit was out of the reporting period of March 2008.

**Land Based Water Quality Mitigation Measures**

- 6.5 Clean the surface channels more frequently, especially at the elbow area of Nam Long Shan Road. The Contractor was also reminded that no untreated water was allowed to discharge offsite in all the times.
- 6.6 The sludge from the wastewater treatment plant should be properly collected and disposed of in order to avoid leaking and ran down to the natural stream.

**Air Quality Mitigation Measures**

- 6.7 The dust control at the crusher loading area and the stockpile transfer point was enhanced with the provision of water sprinklers and extension of the dust screen was in place and in use respectively.

- 6.8 Provision of sufficient water sprinklers to suppress dust especially the rock breaking and excavation activities at the Summit Terminus.
- 6.9 Stockpiles of dusty materials should be covered with tarpaulin or other means in order to reduce the dust nuisance to the vicinity.

**Noise**

- 6.10 No violation was observed during site inspections in the reporting month of [March 2008](#).

**Ecology**

- 6.11 No violation was observed during site inspections in the reporting month of [March 2008](#).

**Waste / Chemical Management**

- 6.12 Drip tray should be provided for the oil drums and chemical, which stored on site.
- 6.13 Regular cleaning of construction debris along the conveyor belts in order to keep tidiness of the site.

**Landscape and Visual**

- 6.14 No violation was observed during site inspections in the reporting month of [March 2008](#).

**Environmental Mitigation Implementation Schedule (EMIS)**

- 6.15 According to the Environmental Permit, the mitigation measures detailed in the permits are required to be implemented. An updated summary of the EMIS is presented in Appendix H.

**Implementation Status of Event/Action Plans**

- 6.16 The Event and Action Plans for air quality, noise and subtidal monitoring are presented in Appendix I.
- 6.17 No exceedance of air quality (i.e. 1 hour & 24-hour TSP) was recorded during the reporting month of [March 2008](#).
- 6.18 No exceedance of noise limit level during daytime and evening was recorded in the reporting month of [March 2008](#).

**Implementation Status of Environmental Complaint Handling Procedures**

**Summary of the Complaints and Prosecutions**

- 6.19 Appendix J presents the environmental complaint flow diagram of the Project.
- 6.20 Six complaints, no summons or prosecution related to environmental issues from EPD was received or made against the Project in [March 2008](#).

## **7. FUTURE KEY ISSUES**

### **Key Issues for the Coming Month**

7.1 Key issues to be considered in the coming month include:

- Noise from operating equipment and machinery on-site.
- Maintenance of silt curtains.
- Construction waste management at the demolition work areas.
- Avoid accumulation of stagnant / muddy water on-site.
- To implement dust suppression measures on dry surfaces.
- Provision of treatment to turbid water from activities on-site before discharge.

### **Monitoring Schedules for the Next Month**

7.2 The environmental monitoring schedules for the next month are shown in Appendix B.

### **Construction Program for the Next 3 Months**

7.3 The construction programme for the next 3 months is shown in Appendix K.



## 8. CONCLUSIONS AND RECOMMENDATIONS

### Conclusions

- 8.1 Environmental impact monitoring was performed in [March 2008](#). All monitoring results in the reporting month were checked and reviewed.
- 8.2 No exceedances of Action and Limit Level for daytime noise, evening noise, 24-hour TSP and 1-hour TSP were recorded in the reporting month of [March 2008](#).
- 8.3 No impact subtidal ecology monitoring was conducted in the reporting period of [March 2008](#) since there was no exceedance recorded at all monitoring stations and control site and the monitoring frequency has been revised to once in every quarter until the end of construction period. The next scheduled monitoring would be in [May 2008](#).
- 8.4 The [seventh](#) terrestrial ecology monitoring conducted in the reporting month of [March 2008](#) and the condition of transplanted plants was good according to the monitoring results.
- 8.5 Six complaints from public and no summons or prosecution related to environmental issues from EPD were made against the Project in the reporting period.

### Recommendations

- 8.6 According to the environmental audit performed in the reporting month, the following recommendations are made:

#### *Air Quality Impact*

- To prohibit any open burning on site.
- To regularly maintain the machinery and vehicles on site.
- To follow up any exceedance caused by the construction works.
- To implement dust suppression measures on dry surfaces.

#### *Noise Impact*


- To inspect the noise sources from inside and outside of the site.
- To follow up any exceedance caused by the construction works.
- To space out noisy equipment and position as far away as possible from sensitive receivers.
- To have regular maintenance of vessels and equipment used.

#### *Waste/Chemical Management*

- To check for any accumulation of waste materials or rubbish on site.
- To avoid any discharge of chemical waste or oil directly from the site.
- To regularly and properly collect, store and dispose of all waste types, including floating refuses at the sea.

#### *Water Quality Impact*

- To minimize water discharge and surface runoff into nearby water body.
- To treat site surface runoffs and wastewater generated from various construction activities with wastewater treatment system (comprised of chemical coagulation, sedimentation and pH control).
- To review and implement temporary site drainage management plan.
- Silt removal facilities, channels, manholes and wastewater treatment system should be frequently cleaned the deposited silt and grit to maintain in proper condition.
- To review the adequacy of the desilting facilities' capacity.

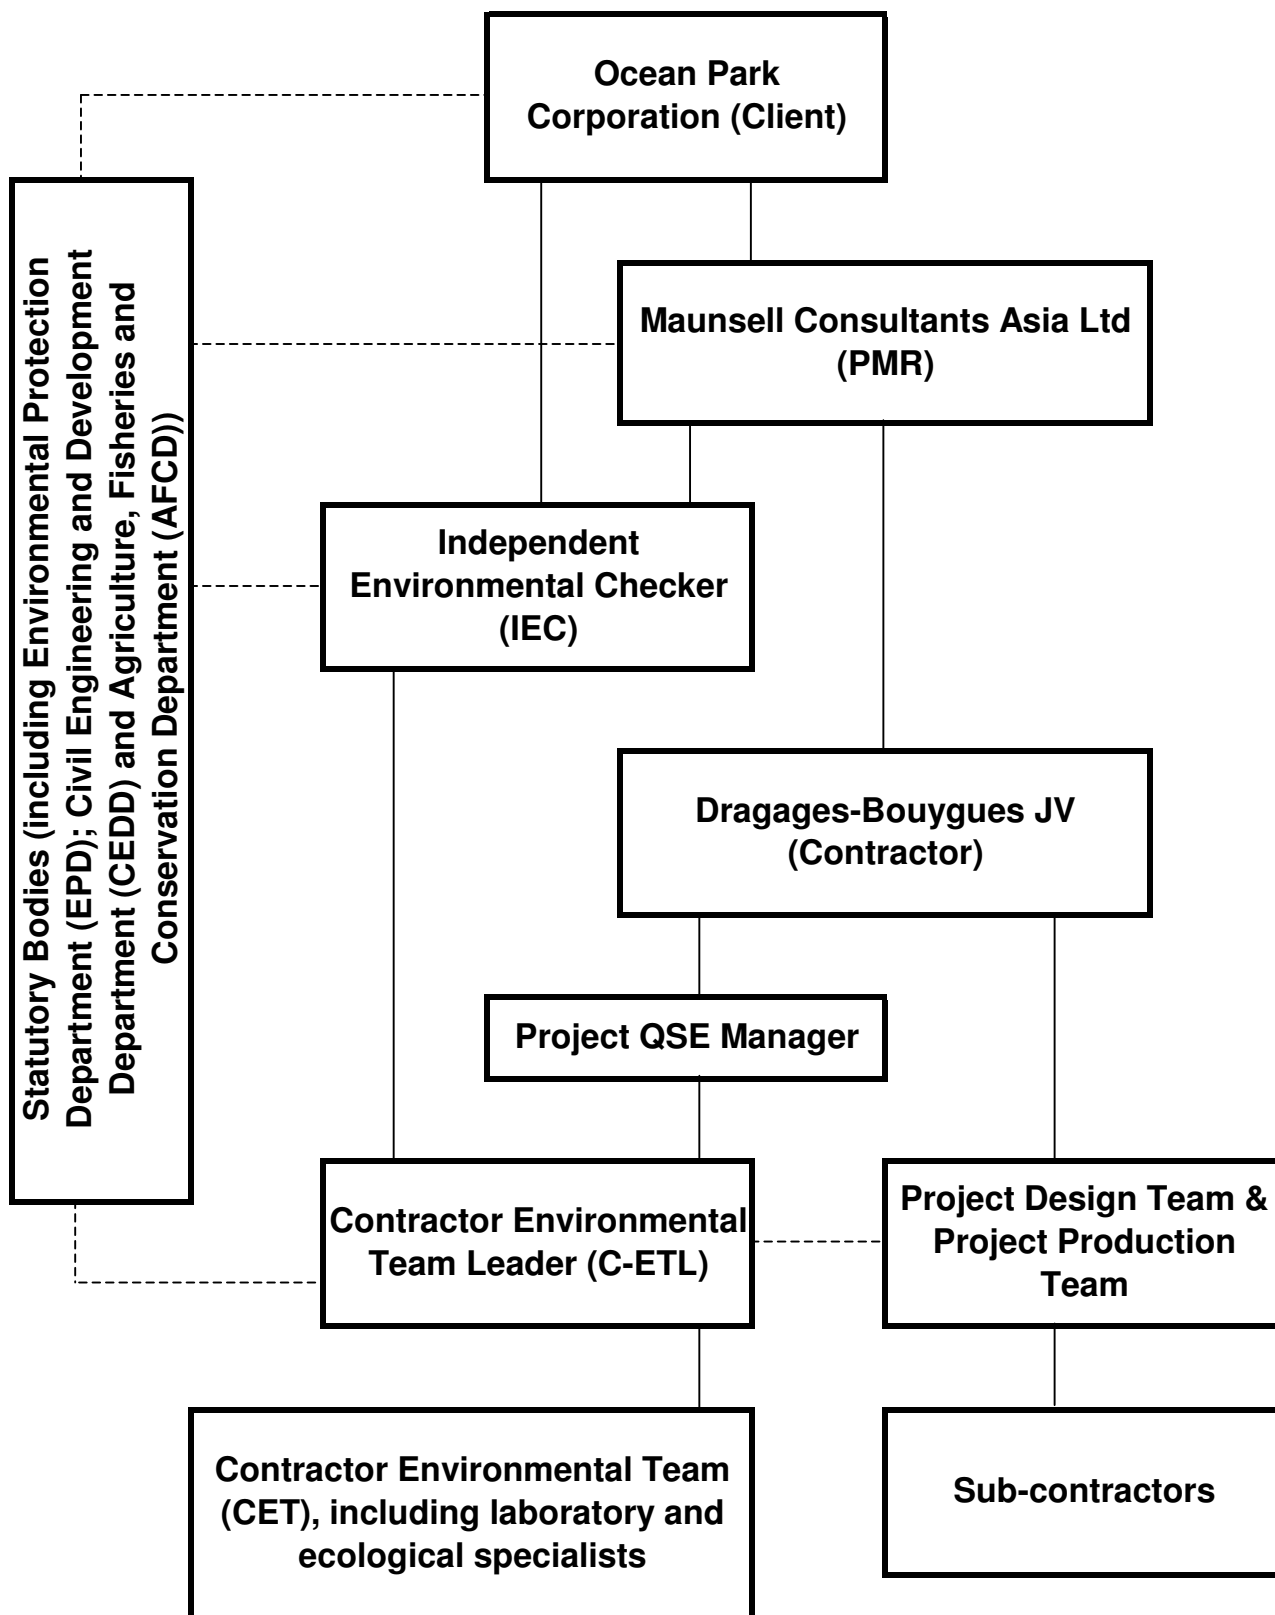


# **LEGEND:**

- Line of Communication
- - - Line of Authority





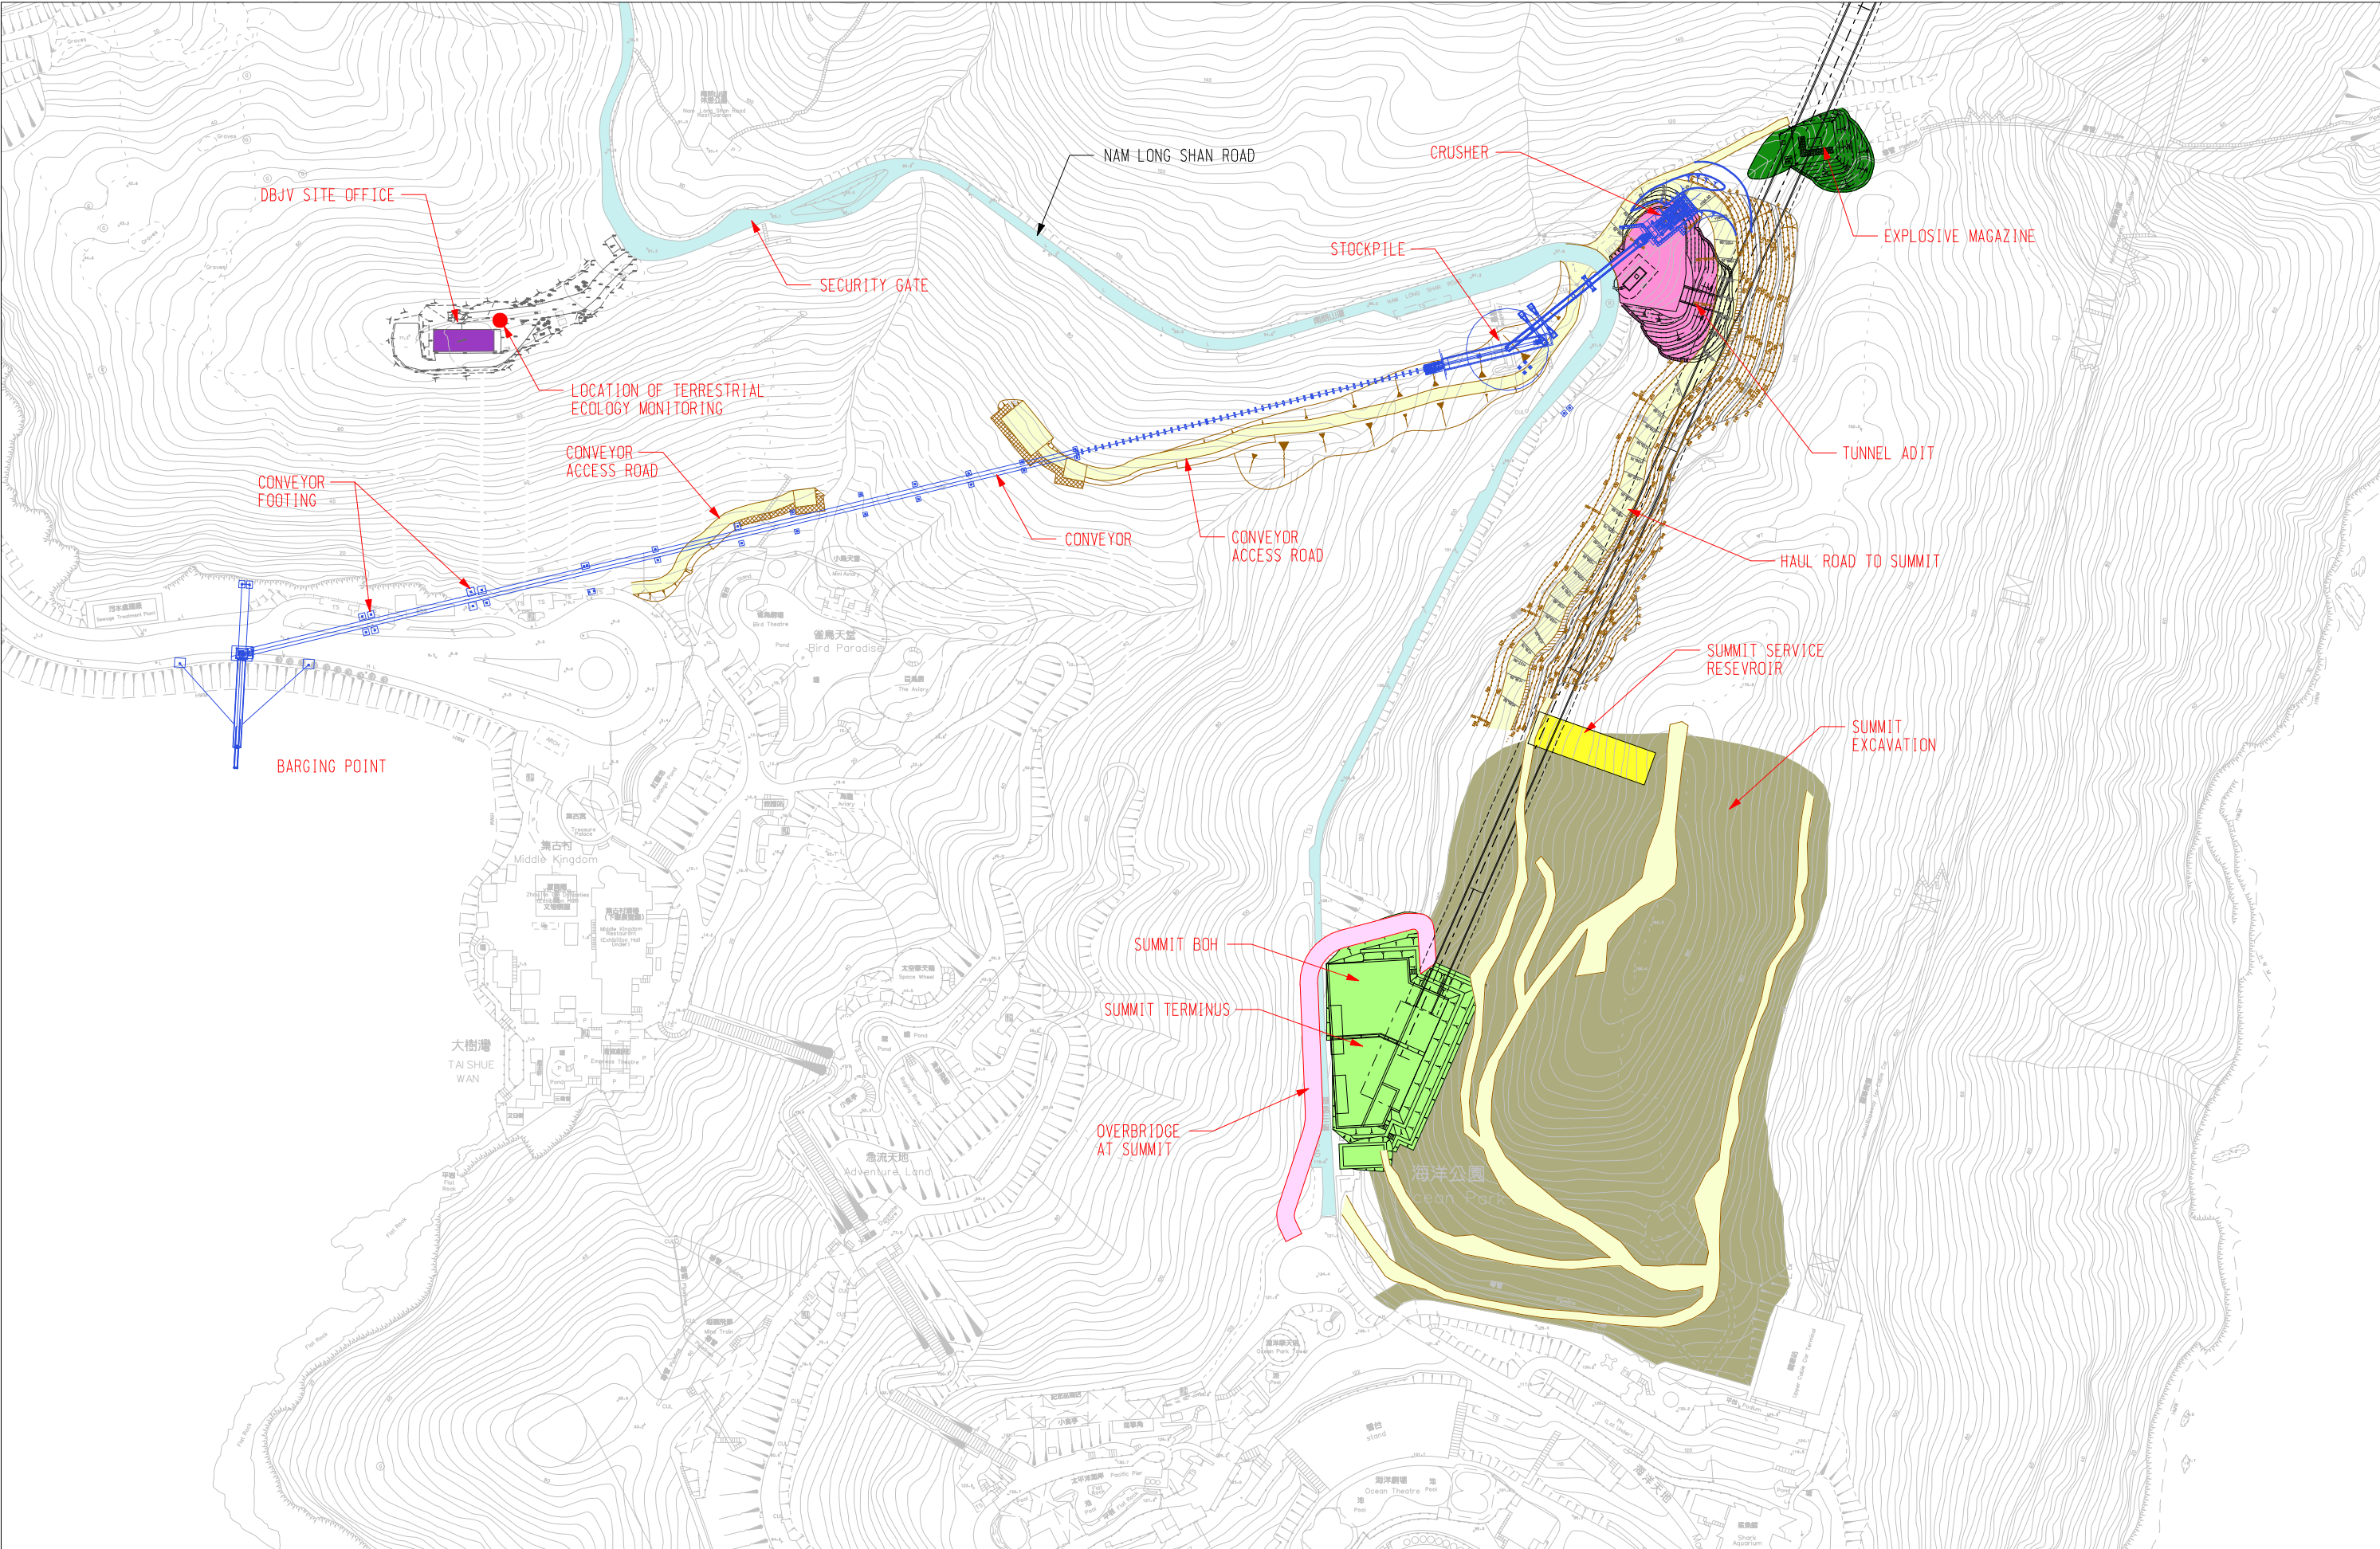

				DESIGNED BY	BLo	MAIN CONTRACTOR : <div> Dragages-Bouygues JV 寶嘉-布依格聯營</div>	CLIENT : <div> 香港海洋公園 OCEAN PARK HONG KONG</div>	PROJECT TITLE : OCEAN PARK REDEVELOPMENT Contract No. C105 Site Formation, Funicular Tunnel and Miscellaneous Works	DRAWING TITLE : FIGURE 1.3 LAYOUT OF WORK SITE (SUMMIT) AND LOCATION OF TERRESTRIAL ECOLOGY MONITORING	CADD FILENAME : Q1ENVQ014B.DGN	
				DRAWN BY	BLo					DATE : 10AUG2007	
				CHECKED BY	GCb					SCALE : 1 : 2500 @ A3	
				IN CHARGE	DNg					DRAWING NUMBER : DBJV/C105/Q1/ENV/Q014	REV. B
B	10AUG2007	GCb	E1B1T_ISSUE	DATE	Q2APB2007						
REV.	DATE	BY	DESCRIPTION								





LEGEND:

- NOISE MONITORING STATION
- ▲ AIR QUALITY MONITORING STATION

深水灣

DEEP WATER BAY  
(SHAM SHUI WAN)

D	07NOV2007	StQ	AMS DELETED
C	31JUL2007	StQ	PROPOSED AM3 RELOCATED
B	25JUN2007	StQ	PROPOSED AM3 ADDED
A	02APR2007	StQ	FIRST ISSUE
REV.	DATE	BY	DESCRIPTION

DESIGNED BY	StQ
DRAWN BY	BLo
CHECKED BY	StQ
IN CHARGE	YTS
DATE	02APR2007

MAIN CONTRACTOR :



CLIENT :



香港海洋公園  
OCEAN PARK HONG KONG

PROJECT TITLE :

OCEAN PARK REDEVELOPMENT  
Contract No. C105  
Site Formation, Funicular Tunnel  
and Miscellaneous Works

DRAWING TITLE :

FIGURE 1.4  
AIR QUALITY AND  
NOISE MONITORING STATIONS  
LOCATION PLAN

CADD FILENAME :	01ENV0015D.DGN
DATE :	07NOV2007
SCALE :	1 : 3000 @ A3
DRAWING NUMBER :	DBJV/C105/01/ENV/0015
REV.	D



					DESIGNED BY	STa	MAIN CONTRACTOR :  Dragages-Bouygues JV 寶嘉-布依格聯營	CLIENT :  香港海洋公園 OCEAN PARK HONG KONG	PROJECT TITLE : OCEAN PARK REDEVELOPMENT Contract No. C105 Site Formation, Funicular Tunnel and Miscellaneous Works	DRAWING TITLE : FIGURE 5.1 LOCATIONS OF SUBTIDAL MONITORING STATION	CADD FILENAME : 01ENV0016A.DGN
					DRAIN BY	BL0					DATE : 02APR2007
					CHECKED BY	STa					SCALE : 1 : 7500 @ A3
					IN CHARGE	YTS					DRAWING NUMBER : DBJV/C105/01/ENV/0016
A	02APR2007	STa	FIRST ISSUE		DATE	02APR2007					REV. A
REV.	DATE	BY		DESCRIPTION							

## APPENDIX A - ACTION AND LIMIT LEVELS

**Table A.1 Action and Limit Levels for 1-hour average TSP and 24-hour average TSP Monitoring**

Monitoring Location	24-hr TSP ( $\mu\text{g}/\text{m}^3$ )		1-hr TSP ( $\mu\text{g}/\text{m}^3$ )	
	Action Level	Limit Level	Action Level	Limit Level
AM1	183	260	440	500
AM2	181	260	500	500
AM3/AM3A	194	260	500	500

**Table A.2 Action and Limit Levels for Daytime, Evening & Night-time Noise Monitoring**

Time Period	Action	Limit
0700-1900 hrs on normal weekdays	When one documented complaint is received from any one of the sensitive receivers	75 dB(A) *
1900-2300 hrs on normal weekdays; and 0700-1900 hrs on holidays		60/65/70 dB(A) **
2300-0700 hrs of next day		45/50/55 dB(A) **

\* reduce to 70dB(A) for school and 65dB(A) during school examination periods, if applicable

\*\* to be selected based on the Area Sensitivity Rating of A/B/C, and the conditions of the CNP(s) must be followed

**Table A.3 Action and Limit Levels for Subtidal Monitoring**

Parameter	Action Level Definition	Limit Level Definition
Sedimentation	If during Impact Monitoring a 15% increase in the percentage of sediment cover on hard corals occurs at more than 20% of the tagged coral at any one Impact Monitoring Site that is not recorded at the Control Site, then the Action Level is exceeded.	If during the Impact Monitoring a 25% increase in the percentage of sediment cover occurs at more than 20% of the tagged coral at any one Impact Monitoring Site that is not recorded at the Control Site, then the Limit Level is exceeded.
Bleaching	If during Impact Monitoring a 15% increase in the percentage of bleaching (bleached white) on hard corals occurs at more than 20% of the tagged coral at any one Impact Monitoring Site that is not recorded at the Control Site, then the Action Level is exceeded.	If during the Impact Monitoring a 25% increase in the percentage of bleaching (bleached white) occurs at more than 20% of the tagged coral at any one Impact Monitoring Site that is not recorded at the Control Site, then the Limit Level is exceeded.
Mortality	If during Impact Monitoring a 15% increase in the percentage of partial mortality on hard corals occurs at more than 20% of the tagged coral at any one Impact Monitoring Site that is not recorded at the Control Site, then the Action Level is exceeded.	If during the Impact Monitoring a 25% increase in the percentage of partial mortality occurs at more than 20% of the tagged coral at any one Impact Monitoring Site that is not recorded at the Control Site, then the Limit Level is exceeded.



## APPENDIX B – ENVIRONMENTAL MONITORING SCHEDULES

From 26 March 2008 to 25 April 2008

Sun	Mon	Tue	Wed	Thu	Fri	Sat
		25 1-hr TSP 24-hr TSP NM (D)	26 1-hr TSP NM (E)	27	28 1-hr TSP	29
30	31 1-hr TSP 24-hr TSP NM (D)	1 1-hr TSP	2 1-hr TSP NM (E)	3	4	5 1-hr TSP 24-hr TSP
6	7 1-hr TSP NM (D)	8	9 1-hr TSP NM (E)	10	11 1-hr TSP 24-hr TSP	12 TM
13	14 1-hr TSP NM (D)	15	16 1-hr TSP NM (E)	17 1-hr TSP 24-hr TSP	18 1-hr TSP	19
20	21 1-hr TSP NM (D)	22	23 1-hr TSP 24-hr TSP NM (E)	24	25 1-hr TSP	26
27	28 1-hr TSP NM (D)	29 1-hr TSP 24-hr TSP	30 1-hr TSP NM (E)			

Notes: NM (D) denotes Daytime Noise Monitoring.

NM (E) denotes Evening Noise Monitoring if construction work is in progress.

SM denotes Subtidal Monitoring.

TM denotes Terrestrial Ecology Monitoring.

Any update / change in the schedule due to weather or other safety factors will be reported in the monthly EM&A report.



## APPENDIX C – AIR QUALITY MONITORING RESULTS

### 1-hr TSP Monitoring Results at Station AM1

Monitoring Period				Filter Weight (g)		Flow Rate (m <sup>3</sup> /min)		Elapse Time (hour)		Sampling Time (hours)	Concentration (μg/m <sup>3</sup> )	Weather Condition	Particular weight (g)	Average flow (m <sup>3</sup> /min)	Total volume (m <sup>3</sup> )
From		To													
Date	Time	Date	Time	Initial	Final	Initial	Final	Initial	Final						
27-Feb-08	9:00	27-Feb-08	10:00	2.8425	2.8505	1.1	1.1	10939.75	10940.75	1	121	Fine	0.0080	1.1	66
29-Feb-08	9:00	29-Feb-08	10:00	2.8655	2.8738	1.1	1.1	10940.75	10941.75	1	125	Fine	0.0083	1.1	66
03-Mar-08	13:54	03-Mar-08	14:54	2.8437	2.8548	1.0	1.0	10965.76	10966.76	1	179	Fine	0.0111	1.0	62
05-Mar-08	9:00	05-Mar-08	10:00	2.8753	2.8895	1.0	1.0	10966.76	10967.76	1	229	Fine	0.0142	1.0	62
06-Mar-08	9:00	06-Mar-08	10:00	2.8234	2.8369	1.0	1.0	10967.76	10968.76	1	223	Fine	0.0135	1.0	61
07-Mar-08	13:00	07-Mar-08	14:00	2.8421	2.8470	1.0	1.0	10992.76	10993.76	1	83	Fine	0.0049	1.0	59
10-Mar-08	9:00	10-Mar-08	10:00	2.8411	2.8497	1.0	1.0	10993.76	10994.76	1	146	Fine	0.0086	1.0	59
12-Mar-08	9:00	12-Mar-08	10:00	2.8349	2.8440	1.0	1.0	10994.76	10995.76	1	154	Fine	0.0091	1.0	59
14-Mar-08	11:00	14-Mar-08	12:00	2.8412	2.8481	1.0	1.0	11019.76	11020.76	1	120	Fine	0.0069	1.0	57
17-Mar-08	9:00	17-Mar-08	10:00	2.8690	2.8774	1.0	1.0	11020.76	11021.76	1	146	Fine	0.0084	1.0	57
18-Mar-08	9:00	18-Mar-08	10:00	2.8634	2.8688	1.0	1.0	11021.76	11022.76	1	92	Fine	0.0054	1.0	59
19-Mar-08	13:40	19-Mar-08	14:40	2.8459	2.8556	1.0	1.0	11046.76	11047.76	1	164	Cloudy	0.0097	1.0	59
20-Mar-08	9:00	20-Mar-08	10:00	2.7936	2.8018	1.0	1.0	11047.76	11048.76	1	139	Fine	0.0082	1.0	59
25-Mar-08	9:00	25-Mar-08	10:00	2.8377	2.8463	1.0	1.0	11048.76	11049.76	1	146	Fine	0.0086	1.0	59

**Remarks:**    Bold value indicated an Action Level exceedance  
                       Bold & Italic value indicated an Limit Level exceedance  
                       X - denotes no measurement due to power supply failure

## APPENDIX C – AIR QUALITY MONITORING RESULTS (CONT'D)

### 1-hr TSP Monitoring Results at Station AM2

Monitoring Period				Filter Weight (g)		Flow Rate (m³/min)		Elapse Time (hour)		Sampling Time (hours)	Concentration (µg/m³)	Weather Condition	Particular weight (g)	Average flow (m³/min)	Total volume (m³)
From		To													
Date	Time	Date	Time	Initial	Final	Initial	Final	Initial	Final						
27-Feb-08	9:00	27-Feb-08	10:00	2.8130	2.8236	1.1	1.1	10675.99	10676.99	1	154	Fine	0.0106	1.1	69
29-Feb-08	9:00	29-Feb-08	10:00	2.8280	2.8401	1.2	1.2	10676.99	10677.99	1	171	Fine	0.0121	1.2	71
03-Mar-08	13:00	03-Mar-08	14:00	2.8570	2.8673	1.1	1.1	10701.99	10702.99	1	158	Fine	0.0103	1.1	65
05-Mar-08	9:00	05-Mar-08	10:00	2.8468	2.8678	1.1	1.1	10702.99	10703.99	1	314	Fine	0.0210	1.1	67
06-Mar-08	9:00	06-Mar-08	10:00	2.8159	2.8355	1.1	1.1	10703.99	10704.99	1	293	Fine	0.0196	1.1	67
07-Mar-08	10:30	07-Mar-08	11:30	2.8383	2.8444	1.1	1.1	10728.99	10729.99	1	97	Fine	0.0061	1.1	63
10-Mar-08	9:00	10-Mar-08	10:00	2.8354	2.8462	1.1	1.1	10729.99	10730.99	1	171	Fine	0.0108	1.1	63
12-Mar-08	9:00	12-Mar-08	10:00	2.8664	2.8836	1.1	1.1	10730.99	10731.99	1	265	Fine	0.0172	1.1	65
14-Mar-08	11:00	14-Mar-08	12:00	2.8556	2.8665	1.2	1.2	10755.99	10756.99	1	154	Fine	0.0109	1.2	71
17-Mar-08	9:00	17-Mar-08	10:00	2.8649	2.8776	1.2	1.2	10756.99	10757.99	1	175	Fine	0.0127	1.2	73
18-Mar-08	9:00	18-Mar-08	10:00	2.8411	2.8482	1.1	1.1	10757.99	10758.99	1	103	Fine	0.0071	1.1	69
19-Mar-08	14:20	19-Mar-08	15:20	2.8549	2.8686	1.1	1.1	10782.99	10783.99	1	199	Cloudy	0.0137	1.1	69
20-Mar-08	9:00	20-Mar-08	10:00	2.8375	2.8498	1.2	1.2	10783.99	10784.99	1	174	Fine	0.0123	1.2	71
25-Mar-08	9:00	25-Mar-08	10:00	2.8206	2.8297	1.2	1.2	10784.99	10785.99	1	125	Fine	0.0091	1.2	73

**Remarks:**    Bold value indicated an Action Level exceedance  
                       Bold & Italic value indicated an Limit Level exceedance  
                       X - denotes no measurement due to power supply failure

## APPENDIX C – AIR QUALITY MONITORING RESULTS (CONT'D)

### 1-hr TSP Monitoring Results at Station AM3A

Monitoring Period				Filter Weight (g)		Flow Rate (m³/min)		Elapse Time (hour)		Sampling Time (hours)	Concentration (µg/m³)	Weather Condition	Particular weight (g)	Average flow (m³/min)	Total volume (m³)
From		To													
Date	Time	Date	Time	Initial	Final	Initial	Final	Initial	Final						
27-Feb-08	9:00	27-Feb-08	10:00	2.8510	2.8703	1.2	1.2	13137.32	13138.32	1	269	Fine	0.0193	1.2	72
29-Feb-08	9:00	29-Feb-08	10:00	2.8137	2.8380	1.2	1.2	13138.32	13139.32	1	339	Fine	0.0243	1.2	72
03-Mar-08	13:10	03-Mar-08	14:10	2.8125	2.8287	1.2	1.2	13163.32	13164.32	1	231	Fine	0.0162	1.2	70
05-Mar-08	9:00	05-Mar-08	10:00	2.8465	2.8765	1.2	1.2	13164.32	13165.32	1	427	Fine	0.0300	1.2	70
06-Mar-08	9:00	06-Mar-08	10:00	2.8383	2.8617	1.1	1.1	13165.32	13166.32	1	342	Fine	0.0234	1.1	68
07-Mar-08	13:06	07-Mar-08	14:06	2.8508	2.8609	1.1	1.1	13190.32	13191.32	1	148	Fine	0.0101	1.1	68
10-Mar-08	9:00	10-Mar-08	10:00	2.8531	2.8768	1.1	1.1	13191.32	13192.32	1	357	Fine	0.0237	1.1	66
12-Mar-08	9:00	12-Mar-08	10:00	2.8515	2.8732	1.1	1.1	13192.32	13193.32	1	327	Fine	0.0217	1.1	66
14-Mar-08	11:00	14-Mar-08	12:00	2.8774	2.8871	1.1	1.1	13217.32	13218.32	1	150	Fine	0.0097	1.1	65
17-Mar-08	9:00	17-Mar-08	10:00	2.8745	2.8920	1.1	1.1	13218.32	13219.32	1	271	Fine	0.0175	1.1	65
18-Mar-08	9:00	18-Mar-08	10:00	2.8160	2.8259	1.1	1.1	13219.32	13220.32	1	149	Fine	0.0099	1.1	66
19-Mar-08	14:35	19-Mar-08	15:35	2.8505	2.8656	1.1	1.1	13244.32	13245.32	1	221	Cloudy	0.0151	1.1	68
20-Mar-08	9:00	20-Mar-08	10:00	2.8073	2.8238	1.1	1.1	13245.32	13246.32	1	241	Fine	0.0165	1.1	68
25-Mar-08	9:00	25-Mar-08	10:00	2.7930	2.8108	1.1	1.1	13246.32	13247.32	1	260	Fine	0.0178	1.1	68

**Remarks:** Bold value indicated an Action Level exceedance  
 Bold & Italic value indicated an Limit Level exceedance  
 X - denotes no measurement due to power supply failure

## APPENDIX C – AIR QUALITY MONITORING RESULTS (CONT'D)

### 24-hr TSP Monitoring Results at Station AM1

Monitoring Period				Filter Weight (g)		Flow Rate (m³/min)		Elapse Time (hour)		Sampling Time (hours)	Concentration (µg/m³)	Weather Condition	Particular weight (g)	Average flow (m³/min)	Total volume (m³)
From		To													
Date	Time	Date	Time	Initial	Final	Initial	Final	Initial	Final						
29-Feb-08	10:40	01-Mar-08	10:41	2.8515	3.0433	1.1	1.1	10941.75	10965.76	24	126	Fine	0.1918	1.1	1517
06-Mar-08	11:00	07-Mar-08	11:00	2.8095	2.9480	1.0	1.0	10968.76	10992.76	24	95	Fine	0.1385	1.0	1453
12-Mar-08	11:56	13-Mar-08	11:56	2.8415	2.9066	1.0	1.0	10995.76	11019.76	24	47	Fine	0.0651	1.0	1380
18-Mar-08	11:32	19-Mar-08	11:32	2.8744	2.9905	1.0	1.0	11022.76	11046.76	24	82	Fine	0.1161	1.0	1416
25-Mar-08	12:05	26-Mar-08	12:05	2.7863	2.9010	1.0	1.0	11049.76	11073.76	24	81	Fine	0.1147	1.0	1416

### 24-hr TSP Monitoring Results at Station AM2

Monitoring Period				Filter Weight (g)		Flow Rate (m <sup>3</sup> /min)		Elapse Time (hour)		Sampling Time (hours)	Concentration (µg/m <sup>3</sup> )	Weather Condition	Particular weight (g)	Average flow (m <sup>3</sup> /min)	Total volume (m <sup>3</sup> )
From		To													
Date	Time	Date	Time	Initial	Final	Initial	Final	Initial	Final						
29-Feb-08	10:30	01-Mar-08	10:30	2.8456	3.0287	1.2	1.2	10677.99	10701.99	24	108	Fine	0.1831	1.2	1699
06-Mar-08	10:25	07-Mar-08	10:25	2.8559	3.1083	1.1	1.1	10704.99	10728.99	24	162	Fine	0.2524	1.1	1561
12-Mar-08	11:31	13-Mar-08	11:31	2.9033	3.0299	1.2	1.2	10731.99	10755.99	24	75	Fine	0.1266	1.2	1695
18-Mar-08	11:20	19-Mar-08	11:20	2.8530	3.0488	1.1	1.1	10758.99	10782.99	24	119	Fine	0.1958	1.1	1650
25-Mar-08	12:04	26-Mar-08	12:04	2.7908	2.9386	1.1	1.1	10785.99	10809.99	24	98	Fine	0.1478	1.1	1516

**Remarks:**    Bold value indicated an Action Level exceedance  
                       Bold & Italic value indicated an Limit Level exceedance  
                       X – denotes no measurement due to power supply failure

## APPENDIX C – AIR QUALITY MONITORING RESULTS (CONT'D)

### 24-hr TSP Monitoring Results at Station AM3A

Monitoring Period				Filter Weight (g)		Flow Rate (m <sup>3</sup> /min)		Elapse Time (hour)		Sampling Time (hours)	Concentration (µg/m <sup>3</sup> )	Weather Condition	Particular weight (g)	Average flow (m <sup>3</sup> /min)	Total volume (m <sup>3</sup> )
From		To													
Date	Time	Date	Time	Initial	Final	Initial	Final	Initial	Final						
29-Feb-08	10:55	01-Mar-08	10:55	2.8302	3.1404	1.2	1.2	13139.32	13163.32	24	180	Fine	0.3102	1.2	1722
06-Mar-08	10:50	07-Mar-08	10:50	2.8322	3.0066	1.2	1.2	13166.32	13190.32	24	98	Fine	0.1744	1.2	1778
12-Mar-08	12:11	13-Mar-08	12:11	2.8585	2.9875	1.1	1.1	13193.32	13217.32	24	81	Fine	0.1290	1.1	1595
18-Mar-08	11:44	19-Mar-08	11:44	2.8711	3.0845	1.1	1.1	13220.32	13244.32	24	130	Fine	0.2134	1.1	1641
25-Mar-08	12:16	26-Mar-08	12:16	2.7871	2.9811	1.1	1.1	13247.32	13271.32	24	118	Fine	0.1940	1.1	1641

**Remarks:**    Bold value indicated an Action Level exceedance  
                       Bold & Italic value indicated an Limit Level exceedance  
                       X – denotes no measurement due to power supply failure

Figure C.1 1-hr TSP monitoring results of Monitoring Station AM1

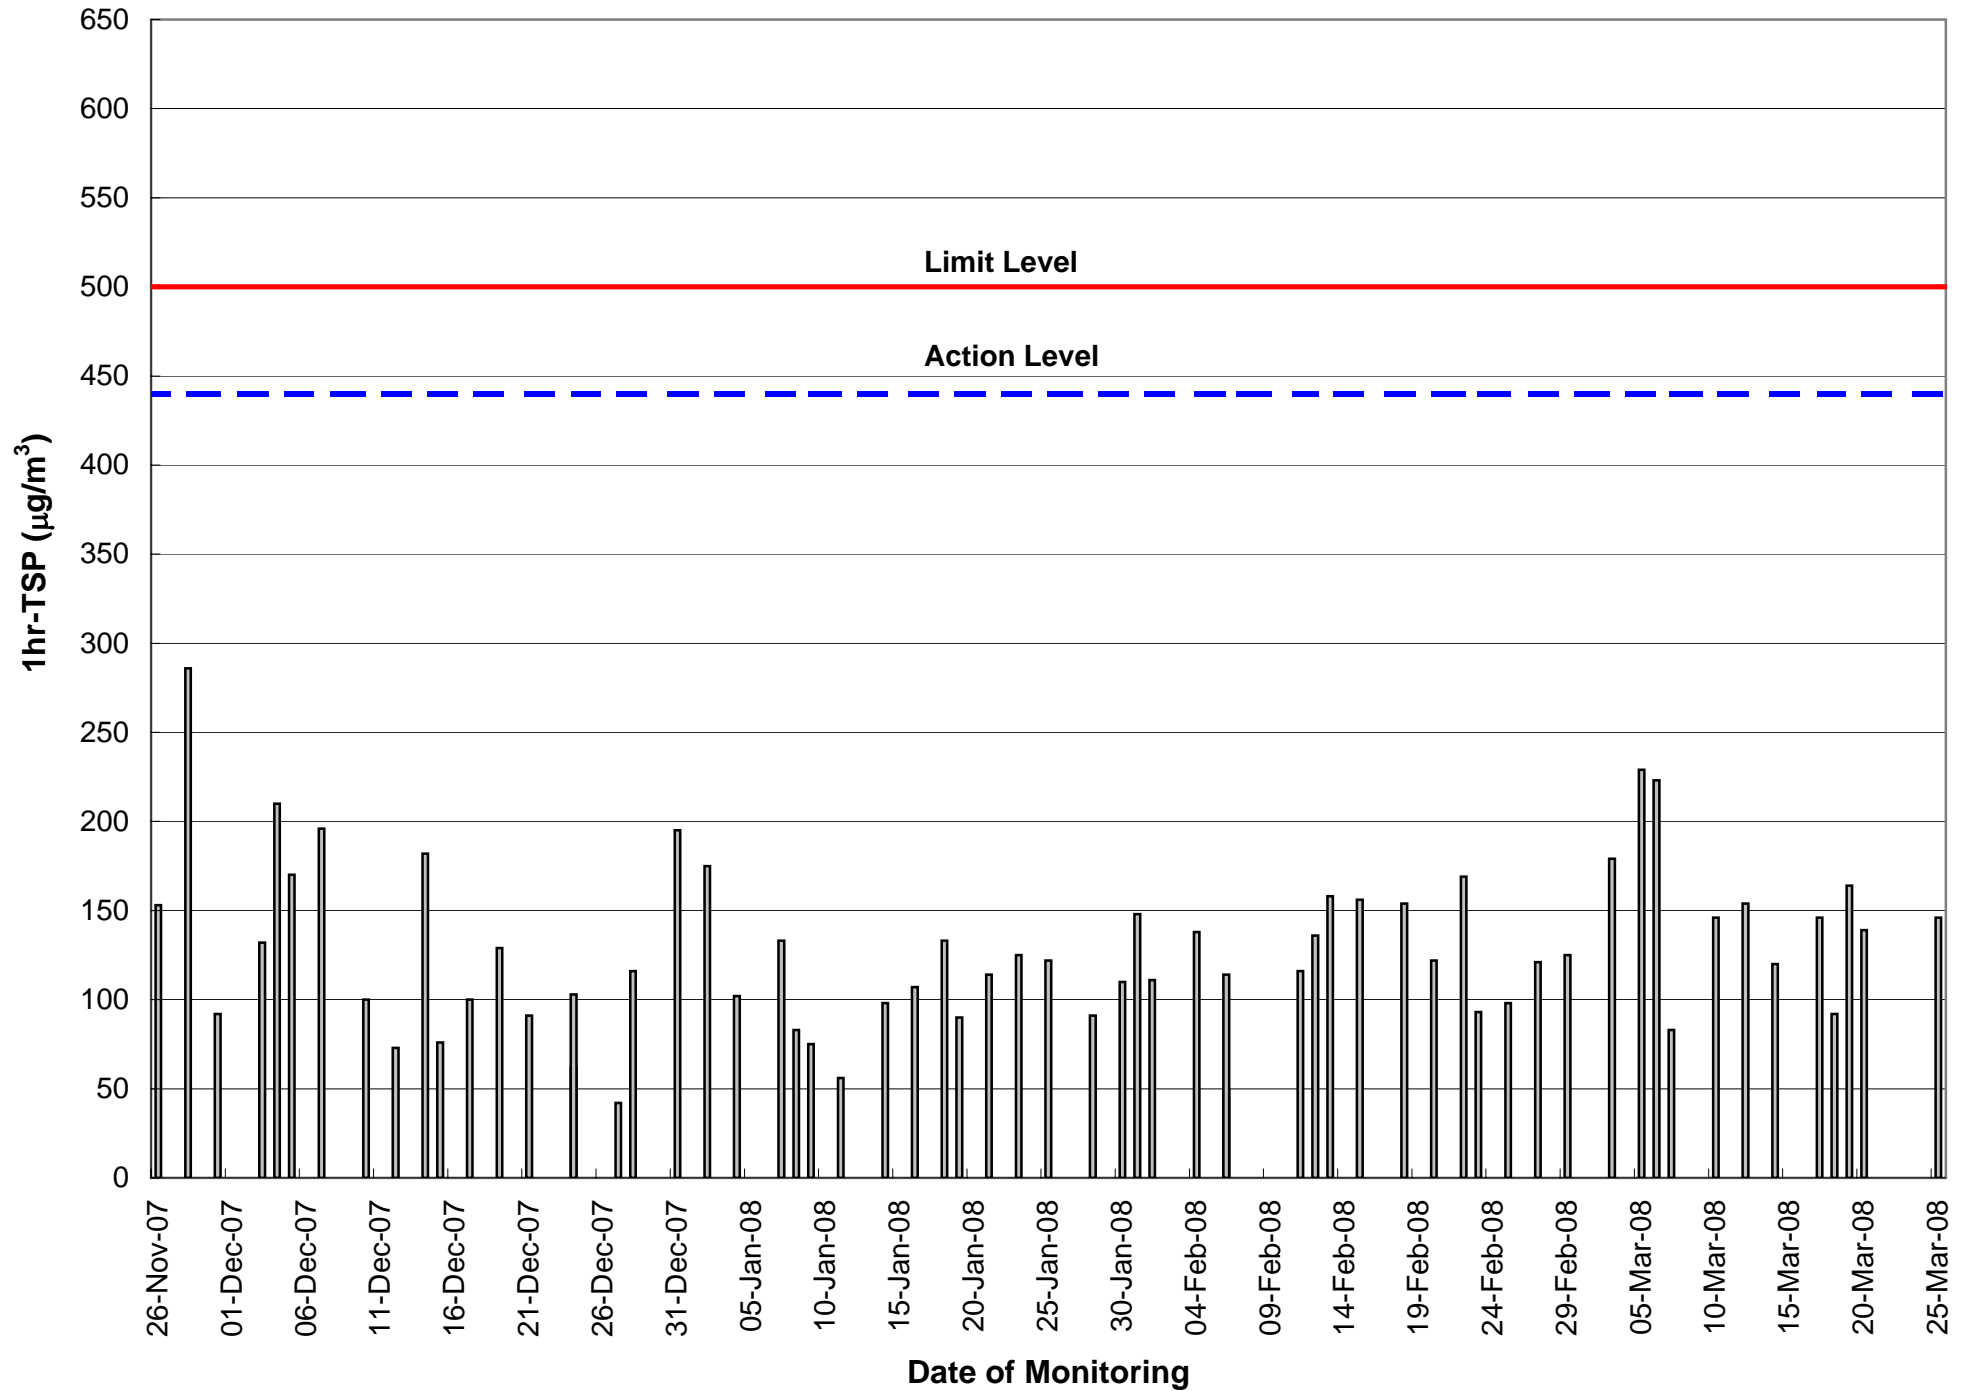


Figure C.2 1-hr TSP monitoring results of Monitoring Station AM2

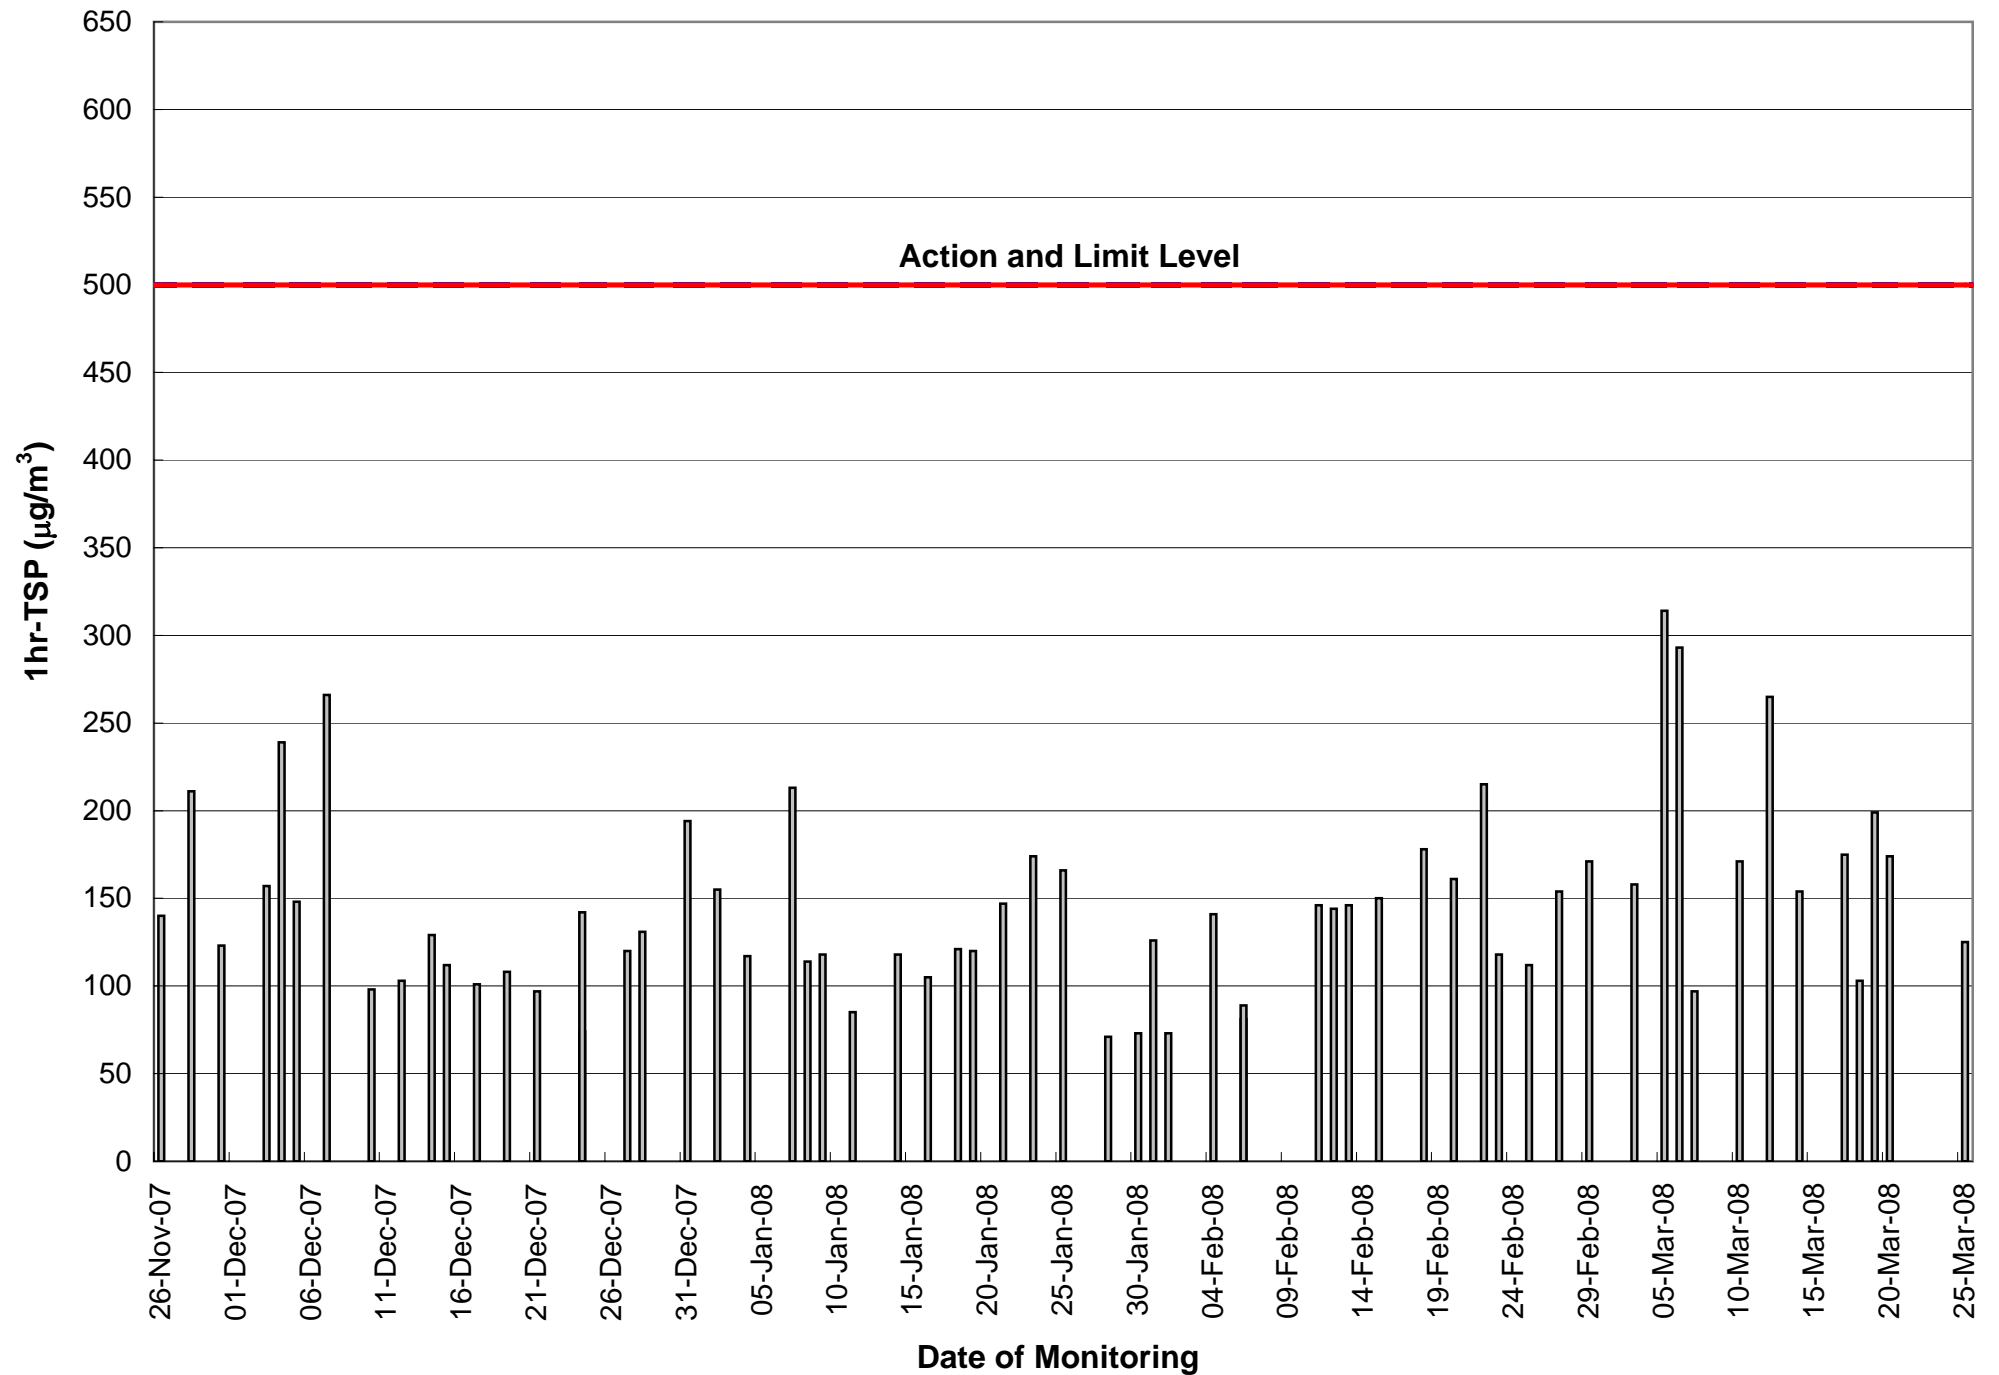


Figure C.3 1-hr TSP monitoring results of Monitoring Station AM3A


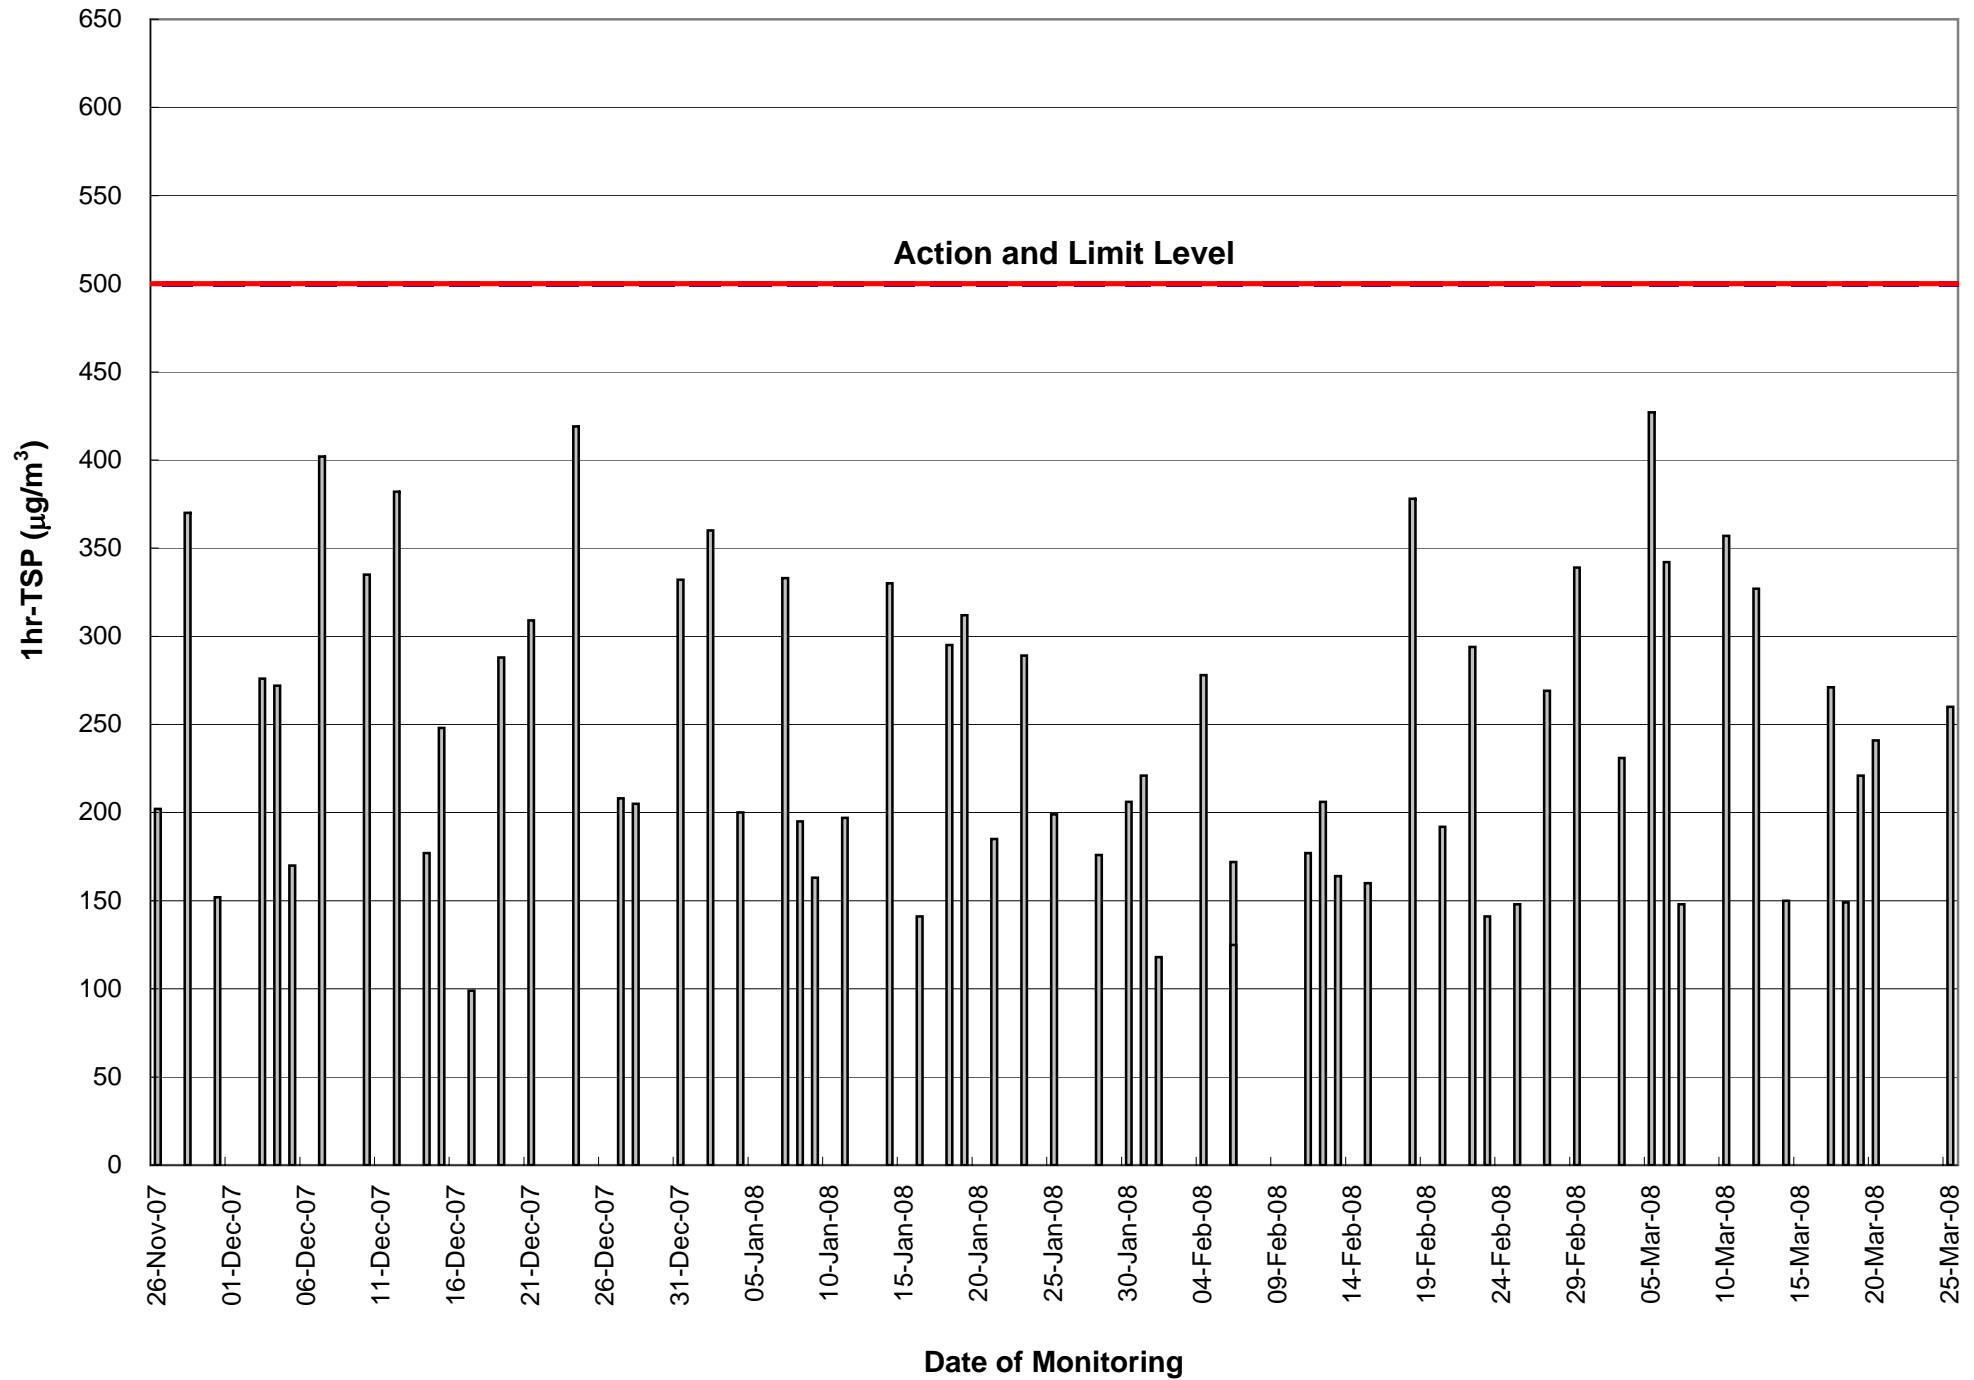




Figure C.4 24-hr TSP monitoring results of Monitoring Station AM1, AM2 & AM3A

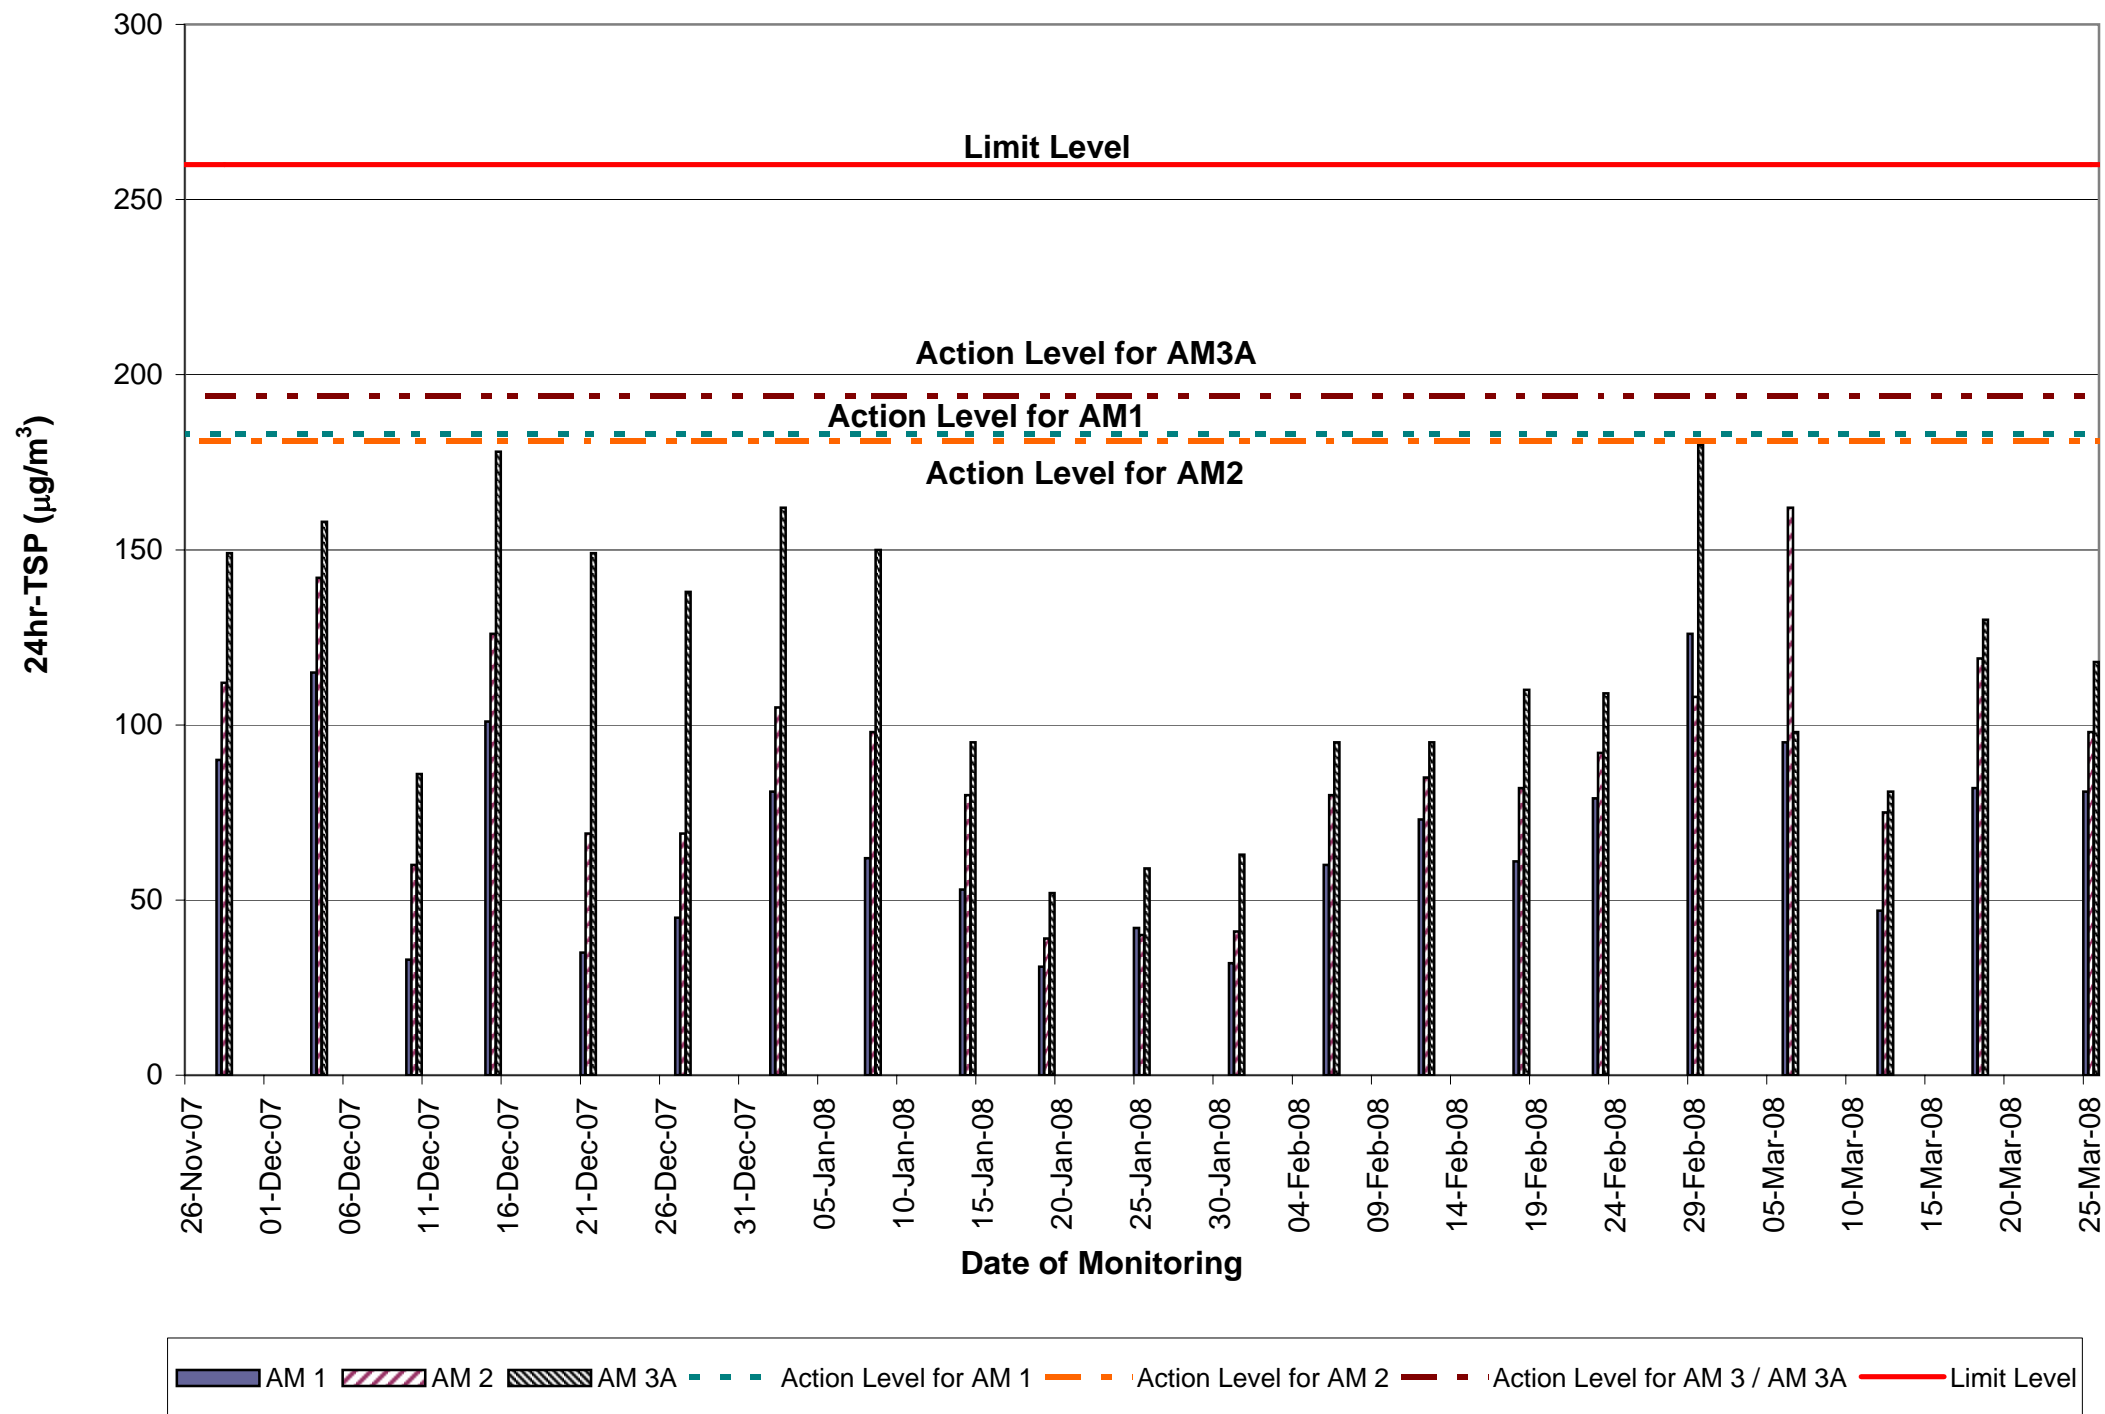

## APPENDIX D – NOISE MONITORING RESULTS

### Daytime Noise Monitoring Results at Station CN1

Date	Weather Condition	Measured Noise Level for 30 mins., dB(A)				Baseline Noise Level, dB(A)	Limit Level, dB(A)	Exceedance (Y/N)
		Time	Leq	L10	L90			
03-Mar-08	Sunny	13:00	68.1	71.3	66.4	63.2	70	N
10-Mar-08	Fine	10:00	70.2	72.8	67.3	63.2	70	N
17-Mar-08	Fine	13:10	66.5	69.2	63.2	63.2	70	N
25-Mar-08	Cloudy	14:50	67.7	71.0	64.4	63.2	70	N

### Daytime Noise Monitoring Results at Station CN2

Date	Weather Condition	Measured Noise Level for 30 mins., dB(A)				Baseline Noise Level, dB(A)	Limit Level, dB(A)	Exceedance (Y/N)
		Time	Leq	L10	L90			
03-Mar-08	Sunny	14:25	60.4	63.9	57.3	64.0	75	N
10-Mar-08	Fine	10:50	61.1	63.4	58.1	64.0	75	N
17-Mar-08	Fine	13:53	67.0	70.2	63.4	64.0	75	N
25-Mar-08	Cloudy	16:15	59.5	63.0	57.4	64.0	75	N

**Remarks:** Bold & Italic value indicated an Limit Level exceedance

## APPENDIX D – NOISE MONITORING RESULTS (CONT'D)

### Daytime Noise Monitoring Results at Station CN3

Date	Weather Condition	Measured Noise Level for 30 mins., dB(A)				Baseline Noise Level, dB(A)	Limit Level, dB(A)	Exceedance (Y/N)
		Time	Leq	L10	L90			
03-Mar-08	Sunny	15:08	59.2	63.2	56.7	59.3	75	N
10-Mar-08	Fine	16:30	58.4	61.2	56.1	59.3	75	N
17-Mar-08	Fine	14:40	60.0	62.8	59.0	59.3	75	N
25-Mar-08	Cloudy	16:53	58.8	62.2	56.7	59.3	75	N

### Daytime Noise Monitoring Results at Station CN4

Date	Weather Condition	Measured Noise Level for 30 mins., dB(A)				Baseline Noise Level, dB(A)	Limit Level, dB(A)	Exceedance (Y/N)
		Time	Leq	L10	L90			
03-Mar-08	Sunny	13:41	70.1	73.8	68.3	59.9	75	N
10-Mar-08	Fine	17:45	65.1	68.4	62.8	59.9	75	N
17-Mar-08	Fine	15:26	64.2	67.7	62.0	59.9	75	N
25-Mar-08	Cloudy	15:27	68.0	71.8	64.7	59.3	75	N

**Remarks:** Bold & Italic value indicated an Limit Level exceedance

## APPENDIX D – NOISE MONITORING RESULTS (CONT'D)

### Evening Noise Monitoring Results at Station CN1

Date	Weather Condition	Measured Noise Level for 15 mins., dB(A)				Baseline Noise Level, dB(A)	Limit Level, dB(A)	Exceedance (Y/N)
		Time	Leq	L10	L90			
27-Feb-08	Cloudy	19:23	53.2	55.3	49.7	57.0	60	N
05-Mar-08	Fine	19:25	52.4	56.2	48.6	57.0	60	N
12-Mar-08	Cloudy	20:30	54.0	57.2	49.6	57.0	60	N
19-Mar-08	Fine	19:30	53.5	56.2	49.8	57.0	60	N

### Evening Noise Monitoring Results at Station CN2

Date	Weather Condition	Measured Noise Level for 15 mins., dB(A)				Baseline Noise Level, dB(A)	Limit Level, dB(A)	Exceedance (Y/N)
		Time	Leq	L10	L90			
27-Feb-08	Cloudy	19:46	55.3	58.4	53.6	58.5	60	N
05-Mar-08	Fine	19:50	53.3	57.4	51.7	58.5	60	N
12-Mar-08	Cloudy	19:25	58.4	61.5	58.9	58.5	60	N
19-Mar-08	Fine	19:55	56.2	59.3	52.6	58.5	60	N

### Evening Noise Monitoring Results at Station CN3

Date	Weather Condition	Measured Noise Level for 15 mins., dB(A)				Baseline Noise Level, dB(A)	Limit Level, dB(A)	Exceedance (Y/N)
		Time	Leq	L10	L90			
27-Feb-08	Cloudy	20:13	55.4	57.9	52.8	56.1	60	N
05-Mar-08	Fine	20:15	54.8	56.8	51.1	56.1	60	N
12-Mar-08	Cloudy	19:00	59.2	62.4	58.8	56.1	60	N
19-Mar-08	Fine	20:20	54.3	57.2	50.9	56.1	60	N

**Remarks:** Bold & Italic value indicated an Limit Level exceedance

## APPENDIX D – NOISE MONITORING RESULTS (CONT'D)

### Evening Noise Monitoring Results at Station CN4

Date	Weather Condition	Measured Noise Level for 15 mins., dB(A)				Baseline Noise Level, dB(A)	Limit Level, dB(A)	Exceedance (Y/N)
		Time	Leq	L10	L90			
27-Feb-08	Cloudy	19:00	54.0	56.2	51.9	55.8	60	N
05-Mar-08	Fine	19:00	52.9	55.8	50.8	55.8	60	N
12-Mar-08	Cloudy	20:05	56.0	58.6	49.3	55.8	60	N
19-Mar-08	Fine	19:00	55.3	56.4	49.8	55.8	60	N

**Remarks:** Bold & Italic value indicated an Limit Level exceedance

**Fig D.1 - Daytime Noise Monitoring Results of Monitoring Stations NM1, NM2, NM3 & NM4**


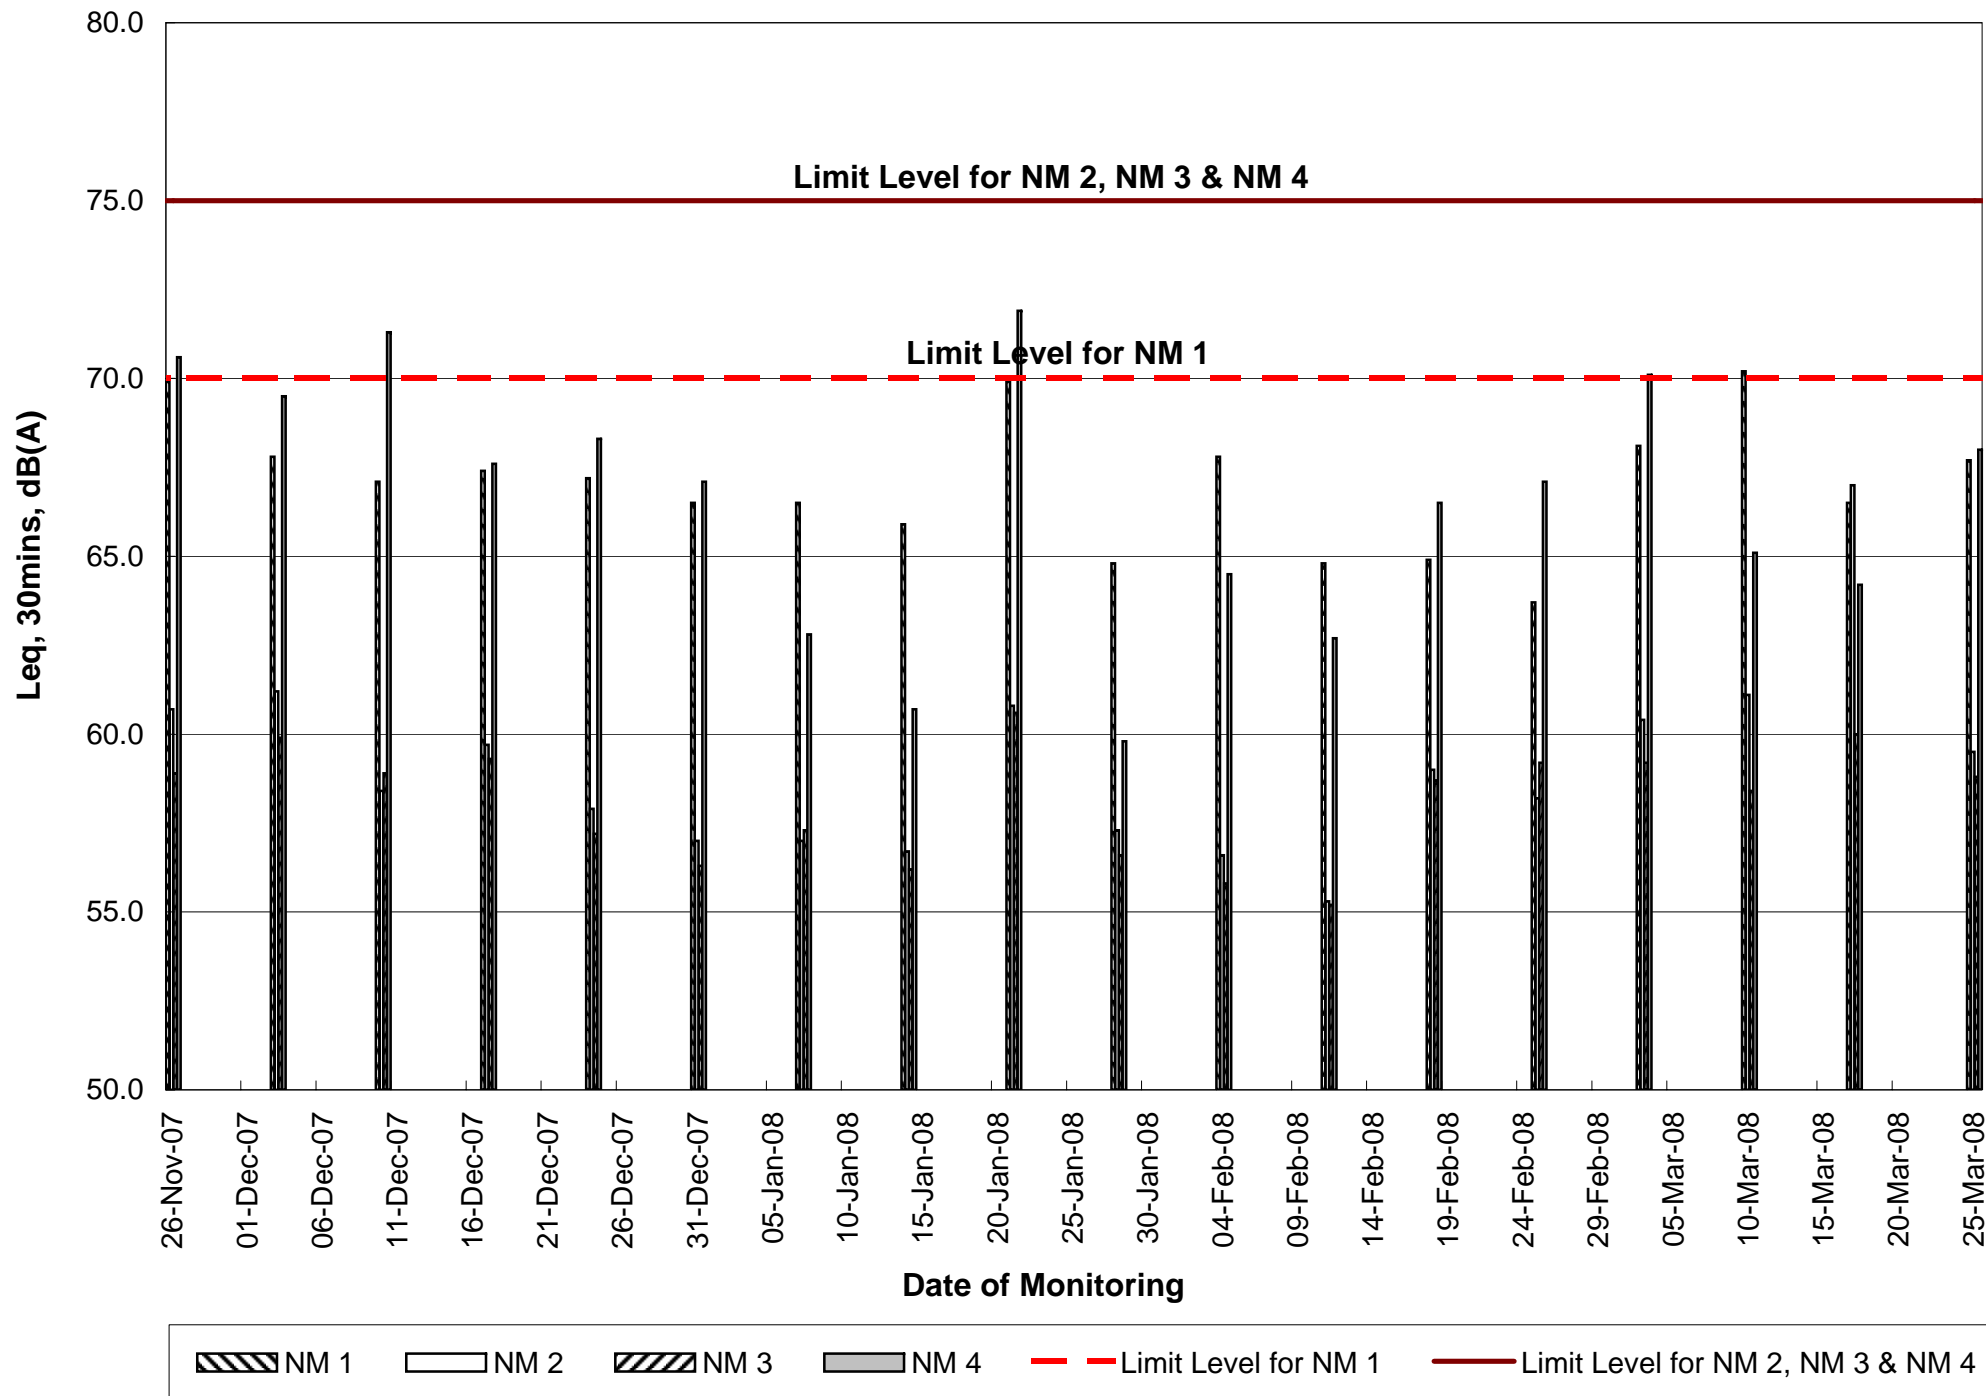


Fig D.2 - Evening Noise Monitoring Results of Monitoring Stations NM1, NM2, NM3 & NM4



## **APPENDIX E – TERRESTRIAL ECOLOGY MONITORING RESULTS**

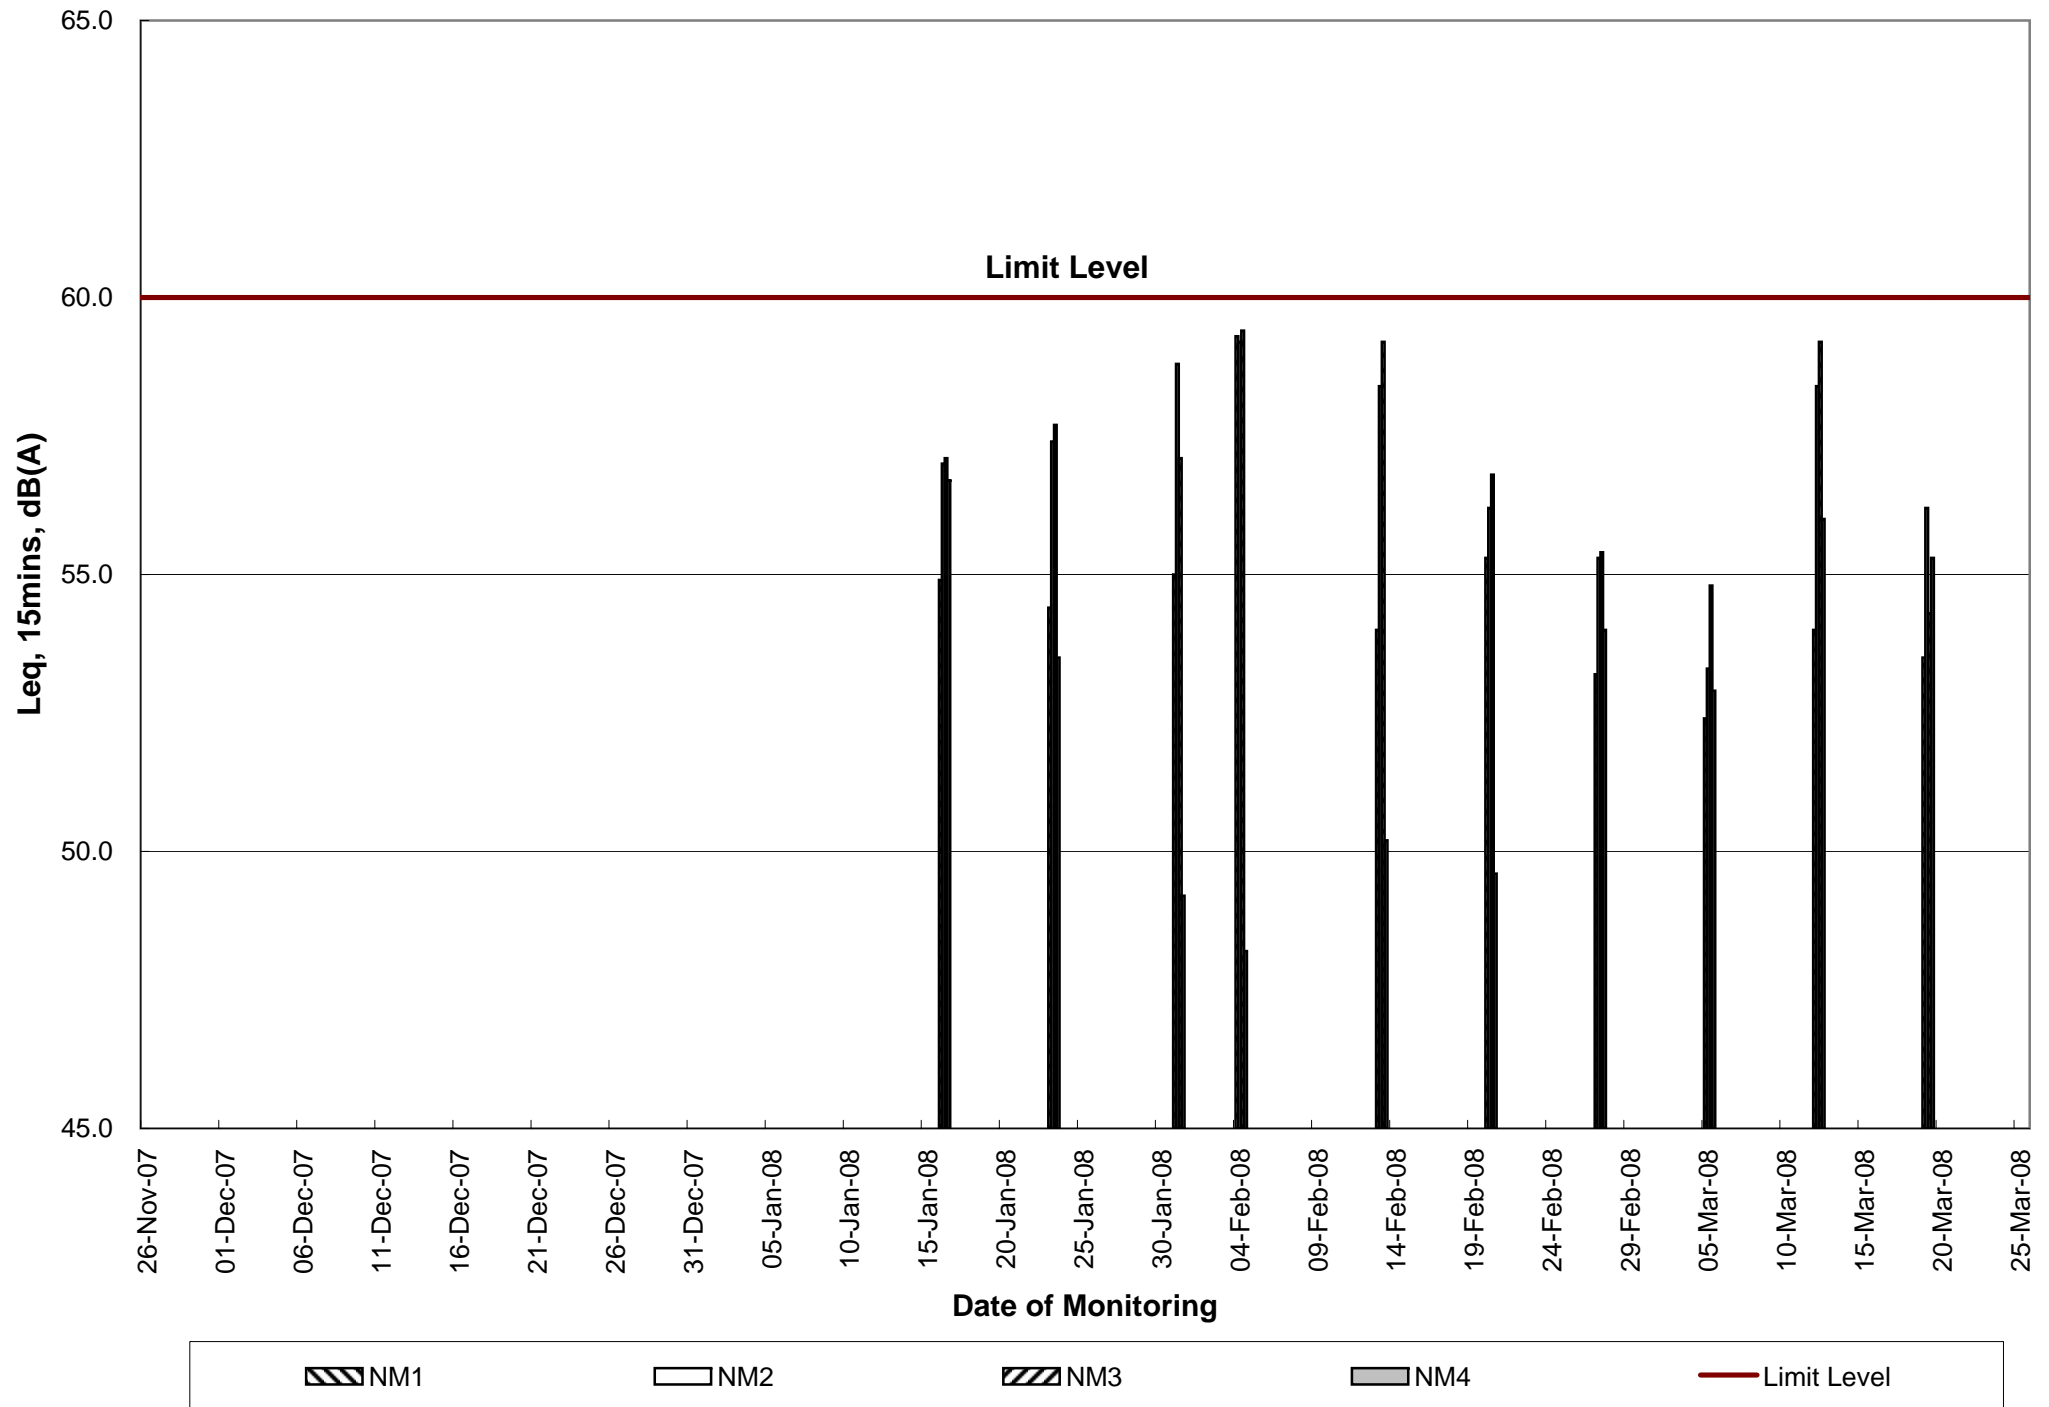

Ocean Park Master Redevelopment Project  
Contractor No. CI05 – Site Formation, Funicular Tunnel and Miscellaneous Works  
Environmental Monitoring Works (Terrestrial Ecology)

**Plant Transplantation Monitoring Report  
(No. 7)  
March 2008**

**Issue and Revision Record**

<b>Rev</b>	<b>Date</b>	<b>Originator</b>	<b>Checker</b>	<b>Approver</b>	<b>Description</b>
A	Apr '08	Dr. Mark Shea	Schroeder TAM	Seved ROBIN	Monthly report

China-Hong Kong Ecology Consultants Co  
1F, 25 Sun Chun Street,  
Tai Hang, Hong Kong

Tel: (852) 2529 9593  
Fax: (852) 2574 4822  
E-mail: ecology2002@netvigator.com

## TABLE OF CONTENTS

1	SUMMARY
2	MONITORING PROGRAMME
3	MONITORING RESULTS
4	PHOTOS

## LIST OF TABLES

Table 1 Plant monitoring programme

Table 2 Summary of field monitoring results of the transplanted plants at the receptor site



## 1. SUMMARY

- 1.1 This is the [seventh](#) routine monitoring report of the transplanted plants for Ocean Park Master Redevelopment Project in [March 2008](#).
- 1.2 Major activities undertaken for the plant receptor during current monitoring period including watering, weeding, apply fertilizer and observation of plant health.
- 1.3 Data collected during filed monitoring was given in Table 2. The transplanted plants were generally health. Few new plant seedlings were appeared due to normal plant re-generation indicating the start of growing season.

## 2. MONITORING PROGRAMME

- 2.1 As specified in the project contract, routine monitoring of the trans-located uncommon plants is required and will be monitored for the first 12 months after plant trans-location operation. Scopes of monitoring include: plant health, survival, receptor condition, photo record and reporting of findings of monitoring. The monitoring schedule in [March 2008](#) was presented in Table 1.

**Table 1 Plant monitoring programme**

No.	Monitoring Date	Action taken
1	19 March 2008	Receptor site monitoring, weeding, apply fertilizer and watering

- 2.2 Three plant species were transplanted from the affected works area to the plant receptor and are the target species for monitoring (Photo 1). Those three plant species were part of the identified plants during baseline surveys and were transplanted to the receptor site before site formation works: i.e. a) Sword-leaved Orchid; b) Balloon Flower; and c) Chinese Lily.

## 3. MONITORING RESULTS

- 3.1 The field monitoring results of the transplanted plants at the receptor site was summarized in Table 2.

**Table 2 Summary of field monitoring results of the transplanted plants at the receptor site**

Year	Month	Common name of plant	No. of plant transplanted	No. of Survived	Survival rate	Remarks
2008	March	Balloon Flower	30	24	80%	
		Chinese Lily	25	25	100%	
		Sword-leaved Orchid	45	45	100%	

- 3.2 The survival rate of the monitored plant - Sword-leaved Orchid was still 100%. (Photo 2)
- 3.3 Most of the transplanted Balloon Flowers at the receptor site were experience seasonal shrunken and re-generated in the growing season. (Photos 3 & 4)
- 3.4 The above ground parts of the Chinese Lily were became withered due to natural seasonality in the dry season while the underground roots are alive since all of the Chinese Lily were geminated in the current growing season and were identified during the monitoring in March 2008.

- 3.5 Regular maintenance including watering, weeding, apply fertilizer and pest checking to be applied continuously at the receptor site in order to achieve higher survival rate. Daily watering is recommended during the current growing season.

#### 4 PHOTOS

	
<p>Photo 1 - Plant nursery.</p>	<p>Photo 2 - Transplanted Sword-leaved Orchid at the plant nursery site.</p>
	
<p>Photo 3 - Balloon Flower: seasonal shrunk.</p>	<p>Photo 4 - Balloon Flower: new seedling.</p>
	
<p>Photo 5 - Chinese Lily: new seedling.</p>	



**APPENDIX F – SUBTIDAL MONITORING RESULTS**

**Blank Page**

## APPENDIX G – CALIBRATION DETAILS

### Air Quality Monitoring Equipments

Monitoring Location	AM1	AM2	AM3/AM3A
High Volume Sample/Dust Trak Serial No.	1174	1177	9998
Sampler Identification	ET / EA / 003 / 08	ET / EA / 003 / 07	ET / EA / 003 / 12
Date of Calibration	03 March 2008	03 March 2008	03 March 2008
Calibration Due Date	02 May 2008	02 May 2008	02 May 2008
Result	Good	Good	Good

### Noise Monitoring Equipments

Monitoring Location	CN1, CN2, CN3 & CN4
Sound Level Meter Brand Name and Model	Rion NL-31
Serial No.	01120826
Date of Calibration	17 April 2007
Calibration Due Date	16 April 2008
Result	Good



東業德勤測試顧問有限公司

ETS-TESTCONSULT LIMITED

8/F, Block B, Veristrong Industrial Centre, 34-36 Au Pui Wan Street, Fotan, Hong Kong

Tel : 2695 8318

E-mail : etl@ets-testconsult.com

Fax : 2695 3944

Web site : www.ets-testconsult.com

## TEST REPORT

### Calibration Report of High Volume Air Sampler


**Manufacturer** : Graseby GMW      **Date of Calibration** : 03 March 2008

**Serial No.** : 1174 (ET / EA / 003 / 08)      **Calibration Due Date** : 02 May 2008

**Method** : Based on Operations Manual for in series calibration method by TISCH  
ENVIROMENTAL Model Te-5025A calibration kit

<b>Results</b>	Flow recorder reading (cfm)	57	51	45	34	24
	Qstd (Actual flow rate, m <sup>3</sup> /min)	1.64	1.45	1.30	1.02	0.80
	Pressure : 763.56 mm Hg	Temp. : 299 K				

### **Sampler 1174 Calibration Curve** **Site: Ocean Park (AM-1)** **Date of Calibration: 03 March 2008**

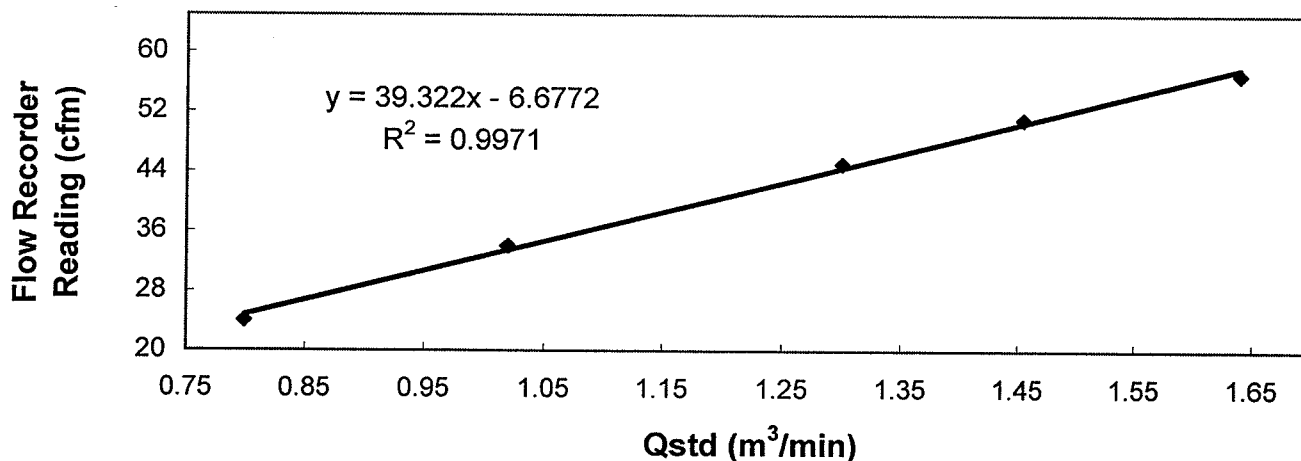

Acceptance Criteria : Correlation coefficient (r) of the calibration curve greater than 0.990 after a 5-point calibration

The high volume sampler complies \* / does not comply \* with the specified requirements and is deemed acceptable \* / unacceptable \* for use.

Calibrated by : LI Wan Lung  
(Technician)

Approved by : H. T. CHOW  
(Asst. Environmental Officer)



東業德勤測試顧問有限公司  
ETS-TESTCONSULT LIMITED

8/F, Block B, Veristrong Industrial Centre, 34-36 Au Pui Wan Street, Fotan, Hong Kong

Tel : 2695 8318

E-mail : etl@ets-testconsult.com

Fax : 2695 3944

Web site : www.ets-testconsult.com

**TEST REPORT**

**Calibration Report**  
**of**  
**High Volume Air Sampler**

**Manufacturer** : Graseby GMW **Date of Calibration** : 03 March 2008


**Serial No.** : 1177 ( ET / EA / 003 / 07 ) **Calibration Due Date** : 02 May 2008

**Method** : Based on Operations Manual for the 5-point calibration using standard calibration kit manufactured by Tisch TE-5025 A

**Results**

Flow recorder reading (cfm)	49	40	35	28	23
Qstd (Actual flow rate, m <sup>3</sup> /min)	1.56	1.38	1.21	0.97	0.77
Pressure :	763.56 mm Hg		Temp. :	298 K	

**Sampler 1177 Calibration Curve**  
**Site: Ocean Park (AM-2)**  
**Date of Calibration: 03 March 2008**

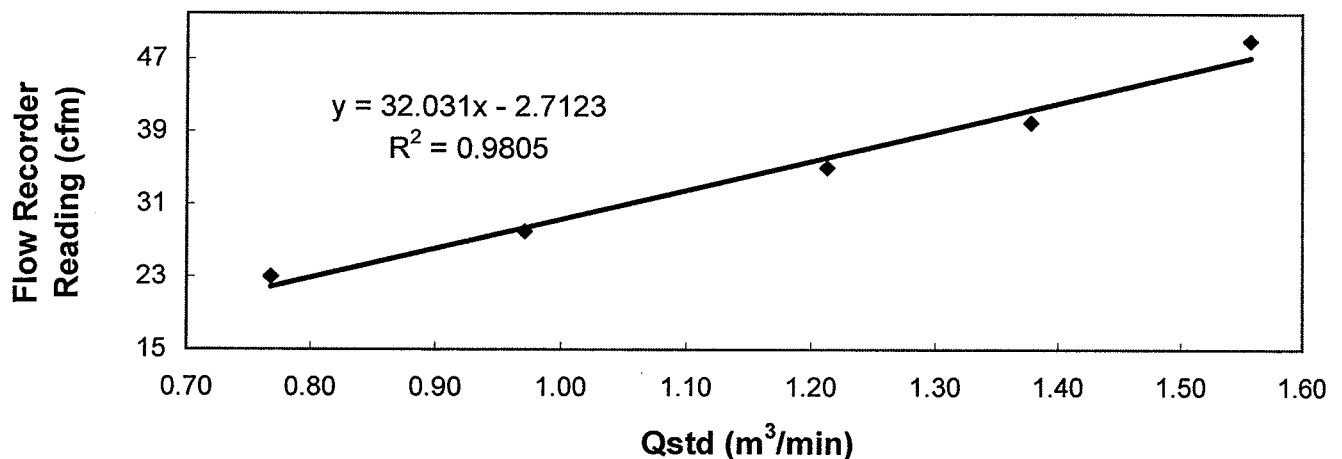


**Acceptance Criteria :** Correlation coefficient (r) of the calibration curve greater than 0.990 after a 5-point calibration

The high volume sampler complies \* / does not comply \* with the specified requirements and is deemed acceptable \* / unacceptable \* for use.

Calibrated by :   
LI Wan Lung  
(Technician)

Approved by :   
H. T. CHOW  
(Asst. Environmental Officer)





東業德勤測試顧問有限公司

ETS-TESTCONSULT LIMITED

8/F., Block B, Veristrong Industrial Centre, 34-36 Au Pui Wan Street, Fotan, Hong Kong

Tel : 2695 8318

E-mail : etl@ets-testconsult.com

Fax : 2695 3944

Web site : www.ets-testconsult.com

**TEST REPORT**


**Calibration Report  
of  
High Volume Air Sampler**

**Manufacturer** : Graseby GMW **Date of Calibration** : 03 March 2008  
**Serial No.** : 9998 ( ET / EA / 003 / 12 ) **Calibration Due Date** : 02 May 2008  
**Method** : Based on Operations Manual for the 5-point calibration using standard calibration kit manufactured by Tisch TE-5025 A

**Results**

Flow recorder reading (cfm)	52	46	40	31	25
Qstd (Actual flow rate, m <sup>3</sup> /min)	1.70	1.52	1.34	1.07	0.83
Pressure :	763.56 mm Hg			Temp. :	298 K

**Sampler 9998 Calibration Curve  
Site: Ocean Park (AM-3)  
Date of Calibration: 03 March 2008**

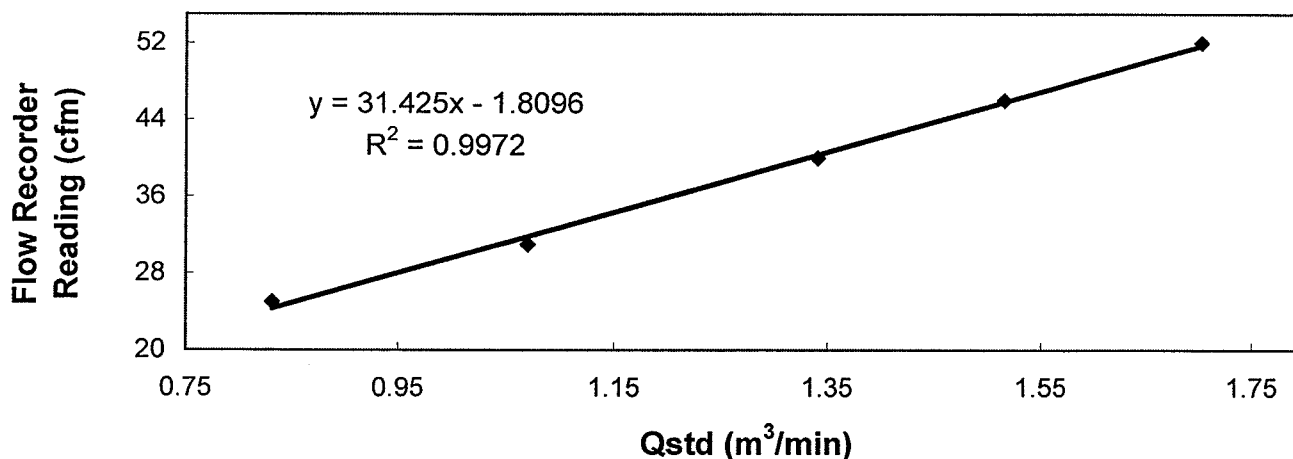

Acceptance Criteria : Correlation coefficient (r) of the calibration curve greater than 0.990 after a 5-point calibration

The high volume sampler complies \* / does not comply \* with the specified requirements and is deemed acceptable \* / unacceptable \* for use.

Calibrated by : LI Wan Lung  
(Technician)

Approved by : H. T. CHOW  
(Asst. Environmental Officer)



Hong Kong Calibration Ltd.

香港校正有限公司

# Calibration Certificate

Certificate No. 71391

Page 1 of 3 Pages

Customer : ETS-Testconsult Limited

Address : 8/F., Block B, Veristrong Industrial Centre, 34-36 Au Pui Wan St., Fotan, Hong Kong.

Order No. : Q70569

Date of receipt : 30-Mar-07

## Item Tested

Description : Precision Integrating Sound Level Meter

Manufacturer : Rion

Model : NL-31

Serial No. : 00110024

## Test Conditions

Date of Test : 17-Apr-07

Supply Voltage : --

Ambient Temperature :  $(23 \pm 3)^{\circ}\text{C}$

Relative Humidity :  $(50 \pm 25) \%$

## Test Specifications

Calibration check.

Calibration procedure : Z01.

## Test Results

All results were within the IEC 651 Type 1 & IEC 804 Type 1 specification.

The results are shown in the attached page(s).

Main Test equipment used:


<u>Equipment No.</u>	<u>Description</u>	<u>Cert. No.</u>	<u>Due Date</u>	<u>Traceable to</u>
S017	Multi-Function Generator	C071115	14-Mar-08	SCL-HKSAR
S024	Sound Level Calibrator	62691	22-Apr-07	NIM-PRC & SCL-HKSAR

The values given in this Calibration Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environmental changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Hong Kong Calibration Ltd. shall not be liable for any loss or damage resulting from the use of the equipment.


The test equipment used for calibration are traceable to International System of Units (SI).

The test results apply to the above Unit-Under-Test only

Calibrated by :

  
P.F. Wong

Approved by :

  
Dorothy Cheuk

Date: 17-Apr-07

This Certificate is issued by:

Hong Kong Calibration Ltd.

Unit 8B, 24/F., Well Fung Industrial Centre, No. 58-76, Ta Chuan Ping Street, Kwai Chung, NT, Hong Kong.

Tel: 2425 8801 Fax: 2425 8646

The copyright of this certificate is owned by Hong Kong Calibration Ltd.. It may not be reproduced except in full.



# Calibration Certificate

Certificate No. 71391

Page 2 of 3 Pages

Results :

## 1. SPL Accuracy

UUT Setting			Applied Value (dB)	UUT Reading (dB)
Level Range (dB)	Weight	Response		
20 – 100	L <sub>A</sub>	Fast	94.07	94.0
		Slow		94.0
	L <sub>C</sub> L <sub>p</sub>	Fast		94.1
		Fast		94.1
30 – 120	L <sub>A</sub>	Fast	94.07	94.0
		Slow		94.0
	L <sub>C</sub> L <sub>p</sub>	Fast		94.0
		Fast		94.1
30 – 120	L <sub>A</sub>	Fast	113.95	113.9
		Slow		113.9
	L <sub>C</sub> L <sub>p</sub>	Fast		113.9
		Fast		114.0

IEC 651 Type 1 Spec. :  $\pm 0.7$  dB

Uncertainty :  $\pm 0.1$  dB

## 2. Level Stability : 0.0 dB

IEC 651 Type 1 Spec. :  $\pm 0.3$  dB

Uncertainty :  $\pm 0.01$  dB

## 3. Linearity

### 3.1 Level Linearity

UUT Range	Applied Value (dB)	UUT Rdg (dB)	Variation (dB)	IEC 651 Type 1 Spec. (inside Primary)
130	114.0	114.1	0.1	$\pm 0.7$ dB
130	104.0	104.0	0.0	
120	94.0	94.0 (Ref.)	0.0	
110	84.0	84.1	0.1	
100	74.0	74.1	0.1	
90	64.0	64.1	0.1	
80	54.0	54.1	0.1	

Uncertainty :  $\pm 0.1$  dB



# Calibration Certificate

Certificate No. 71391

Page 3 of 3 Pages

## 3.2 Differential level linearity

UUT Range	Applied Value (dB)	UUT Rdg (dB)	Variation (dB)	IEC 651 Type 1 Spec.
120	84.0	84.0	0.0	$\pm 0.4$
	94.0	94.0 (Ref.)	--	
	95.0	95.0	0.0	$\pm 0.2$
	104.0	104.0	0.0	$\pm 0.3$
	105.0	105.0	0.0	$\pm 1.0$

Uncertainty :  $\pm 0.1$  dB

## 4. Frequency Weighting

A weighting

Frequency	Attenuation (dB)	IEC 651 Type 1 Spec.
31.5 Hz	- 39.6	- 39.4 dB, $\pm 1.5$ dB
63 Hz	- 26.3	- 26.2 dB, $\pm 1.5$ dB
125 Hz	- 16.2	- 16.1 dB, $\pm 1$ dB
250 Hz	- 8.7	- 8.6 dB, $\pm 1$ dB
500 Hz	- 3.3	- 3.2 dB, $\pm 1$ dB
1 kHz	0.0 (Ref.)	0 dB, $\pm 1$ dB
2 kHz	+ 1.3	+ 1.2 dB, $\pm 1$ dB
4 kHz	+ 1.1	+ 1.0 dB, $\pm 1$ dB
8 kHz	- 1.1	- 1.1 dB, + 1.5 dB ~ - 3 dB
16 kHz	- 6.7	- 6.6 dB, + 3 dB ~ $\infty$

Uncertainty :  $\pm 0.1$  dB

## 5. Time Averaging

Applied Burst duty Factor	Applied Leq Value (dB)	UUT Reading (dB)	IEC 804 Type 1 Spec.
continuous	40.0	40.0	--
1/10	40.0	39.9	$\pm 0.5$ dB
1/10 <sup>2</sup>	40.0	40.0	
1/10 <sup>3</sup>	40.0	39.9	$\pm 1.0$ dB
1/10 <sup>4</sup>	40.0	39.9	

Uncertainty :  $\pm 0.1$  dB

Remark : 1. UUT : Unit-Under-Test

2. The uncertainty claimed is for a confidence probability of not less than 95%.

3. Atmospheric Pressure : 990 hPa.

4. The internal cal reference of UUT was drifted from 94.0 dB to 93.4 dB.

----- END -----



Hong Kong Calibration Ltd.

香港校正有限公司

# Calibration Certificate

Certificate No. 71392A

Page 1 of 2 Pages

Customer : ETS-Testconsult Limited

Address : 8/F., Block B, Veristrong Industrial Centre, 34-36 Au Pui Wan St., Fotan, Hong Kong.

Order No. : Q70569

Date of receipt : 30-Mar-07

## Item Tested

Description : Sound Level Calibrator

Manufacturer : Rion

Model : NC-73

Serial No. : 10644871

## Test Conditions

Date of Test : 17-Apr-07

Supply Voltage : --

Ambient Temperature :  $(23 \pm 3)^{\circ}\text{C}$

Relative Humidity :  $(50 \pm 25) \%$

## Test Specifications

Calibration check.

Calibration procedure : F21, Z02.

## Test Results

All results were within the manufacturer's specification.

The results are shown in the attached page(s).

Main Test equipment used:


<u>Equipment No.</u>	<u>Description</u>	<u>Cert. No.</u>	<u>Due Date</u>	<u>Traceable to</u>
S014	Spectrum Analyzer	62914	7-Jul-07	NIM-PRC & SCL-HKSAR
S024	Sound Level Calibrator	62691	22-Apr-07	NIM-PRC & SCL-HKSAR
S041	Universal Counter	63839	22-Aug-07	SCL-HKSAR

The values given in this Calibration Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environmental changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Hong Kong Calibration Ltd. shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration are traceable to International System of Units (SI).

The test results apply to the above Unit-Under-Test only

Calibrated by :   
P.F. Wong

Approved by :   
Dorothy Cheuk

This Certificate is issued by:

Hong Kong Calibration Ltd.

Unit 8B, 24/F., Well Fung Industrial Centre, No. 58-76, Ta Chuen Ping Street, Kwai Chung, NT, Hong Kong.

Tel: 2425 8801 Fax: 2425 8646

Date: 2-May-07

The copyright of this certificate is owned by Hong Kong Calibration Ltd.. It may not be reproduced except in full.



# Calibration Certificate

Certificate No. 71392A

Page 2 of 2 Pages

Results :

**1. Level Accuracy (at 1 kHz)**

UUT Nominal Value	Measured Value	Mfr's Spec.
94 dB	93.96 dB	$\pm 1$ dB

Uncertainty :  $\pm 0.1$  dB

**2. Frequency Accuracy**

UUT Nominal Value	Measured Value	Mfr's Spec.
1 kHz	0.981 kHz	$\pm 2$ %

Uncertainty :  $\pm 0.1$  %

**3. Level Stability : 0.1 dB**

Uncertainty :  $\pm 0.01$  dB

**4. Total Harmonic Distortion :  $< 1.0$  %**

Mfr's Spec. :  $< 3$  %

Uncertainty :  $\pm 2.3$  % of reading

Remark : 1. UUT : Unit-Under-Test

2. The uncertainty claimed is for a confidence probability of not less than 95%.

3. The above measured values are the mean of 3 measurement.

4. Atmospheric Pressure : 990hPa

5. This certificate is to supercede our former certificate no. : 71392

----- END -----

## APPENDIX H – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Air Quality								
AQ01	Dust emission from construction site in general	Cap 311, sub leg R Schedule III S.13	Hoardings of not less than 2.4m high from ground level should be erected along the entire length of the site boundary except for site entrance or exit.	✓			✓	
AQ02	Dust emission from construction site in general	Cap 311, sub leg R Schedule III S.13 & PS 26.10(6)(i)(e)	To minimize dust emissions, the amount of soil exposed and the dust generation potential should be kept as low as possible. This can be accomplished by water sprays, surface compaction; temporary fabric covers, minimizing the extent of exposed soil, and prompt re-vegetation of completed earthworks.	✓		✓	✓	
AQ03	Dust emission from construction site in general	Cap 311, sub leg R Schedule III S.13 & PS 26.10(6)(i)(j)	Wheel washing facilities should be provided at all vehicle site entrances/exits to prevent dusty material from being carried off-site on vehicles and deposited on public roads. The facilities shall be provided in advance of any major construction activities.	✓			✓	
AQ04	Dust emission from site clearance	Cap 311, sub leg R Schedule IV S.26 (1), (2) & PS 26.10(6)(i)(l)	The working area for uprooting of trees, shrubs or vegetation or for the removal of boulders, poles, pillars or temporary or permanent structures shall be sprayed with water or a dust suppression agent immediately before, during and immediately after the operation so as to maintain the entire surface wet.		✓	✓	✓	
AQ05	Dust emission from excavation or earth moving	Cap 311, sub leg R Schedule III S.24	The heights from which excavated materials are dropped should be minimized to limit fugitive dust generation from loading/unloading.	✓		✓	✓	
AQ06	Dust emission from excavation or earth moving	Cap 311, sub leg R Schedule III S.24	Working areas of any excavation or earth moving operation will be sprayed with water.		✓	✓	✓	
AQ07	Access Road	PS 26.10(6)(i)(g)	Effective water sprays should be used on the site to dampen potential dust emission sources such as unpaved areas used by site traffic and active construction areas.		✓	✓	✓	

# **APPENDIX H – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE**

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Air Quality								
AQ08	Access Road	Cap 311, sub leg R Schedule III S.14 (1) & PS 26.10 (6)(i)(a)	Areas of site with regular movement of vehicles shall have an approved hard surface and be kept clean of loose material.	✓			✓	
AQ09	Access Road	PS 26.10 (6)(i)(d)	All on-site motorized vehicles speeds shall be restricted to a max. speed of 10km/h and delivery vehicles to designated roadways inside the Site to reduce dust re-suspension and dispersion.			✓	✓	
AQ10	Access Road	Cap 311, sub leg R Schedule III S.14 (1) & PS 26.10(6)(i)(a)	The roadway between the wheel wash and the public road will be paved.	✓			✓	
AQ11	Dust emission from material transporting and handling	PS 26.10(6)(i)(h) & (i)	Vehicles transporting materials with the potential to generate dust should have properly fitting side and tailboards.	✓		✓	✓	
AQ12	Dust emission from material transporting and handling	PS 1.110 (a)	The cover of the bed of dump truck shall be power operated with manual backup, so that the operator would not need to climb on the dump bed to operate the cover (both under power mode and manual mode). Operation from driver cab or with the operator standing on ground is acceptable.  After the cover to the dump bed is closed, any gap left on the system of enclosure should be less than 25mm wide measured in a direction across the gap. Any remaining gap is to be sealed up tightly with a layer of nylon bristle of sufficient length to bridge across the gap.	✓		✓	✓	
AQ12a	Dust emission from material transporting and handling	Cap 311, sub leg R Schedule IV S.26 (1)	Materials transported by vehicles should be covered, with the cover properly secured and extended over the edges of the side and tail boards.	✓		✓	✓	
Air Quality								
AQ13	Dust emission from material	PS 26.10(6)(i)(k)	Spraying all dusty materials with water prior to	✓		✓	✓	



## APPENDIX H – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
	transporting and handling		any loading, unloading or transfer operation so as to maintain the dusty material wet.					
AQ14	Dust emission from material transporting and handling	PS 26.10(6)(i)(a)	Material storage and handling areas shall be located on hard core or paved.	✓		✓	✓	
AQ15	Dust emission from material transporting and handling	Cap 311, sub leg R Schedule IV S.26	All stockpiled aggregate or spoil of more than 50 m <sup>3</sup> should be enclosed or covered and water applied twice per day during dry or windy conditions.	✓		✓	✓	
AQ16	Dust emission from materials transporting and handling	Cap 311, sub leg R Schedule III S.15 (1) & PS 26.10(6)(i)(f)	Stockpiles of dusty materials shall be covered and minimized the extent of spoil exposed at any given time.	✓		✓	✓	
AQ17	Dust emission from materials transporting and handling	Cap 311, sub leg R Schedule III S.15 (1)	Every stock of more than 20 bags of cement shall be covered entirely by impervious sheeting or placed in an area sheltered on the top and the 3 sides.	✓		✓	✓	
AQ18	Dust emission from materials transporting and handling	Cap 311, sub leg R Schedule III S.15 (1) & PS 26.10 (6)(i)(b)	Material conveyors for the transfer of dusty materials shall be fitted with windboards and enclosed conveyor transfer points and hopper discharge areas to minimize dust emission.	✓	✓		✓	
AQ19	Dust emission from materials transporting and handling	PS 26.10 (6)(i)(c)	Totally enclosing all conveyors carrying materials which have the potential to create dust and fitting them with belt cleaners.	✓	✓		✓	
AQ20	Dust emission from materials transporting and handling	PS26.16 (2)(ii)	Profiled steel cladding should be provided at two sides of loading point at barge.	✓	✓		✓	
AQ21	Dust emission from materials transporting and handling	PS 26.16 (2)(iii)	Dust suppression sprays should be installed and operated in strategic locations at the feeding inlet and outlet.	✓	✓		✓	
AQ22	Dust emission from materials transporting and handling	PS 26.16 (2)(iv)	The barging point should be placed within a totally enclosed structure incorporating an enclosed chute for material transfer to barge.	✓	✓		✓	

# **APPENDIX H – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE**

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Air Quality								
AQ23	Dust emission from materials transporting and handling	PS 26.16 (2)(iv)	Flexible curtain should be hanged on the enclosed chute to prevent dust emission when excavated material/rocks are transported into the barge.	✓	✓		✓	
AQ24	Dust emission from materials transporting and handling	Cap 311, sub leg R Schedule III S.15	Debagging of cement and similar materials to be done in a ventilated enclosure with a filtered extraction system.	✓		✓	✓	
AQ25	Dust Emission from Blasting	Cap 311. sub leg R Schedule IV S.27 (1), (2)	Wet the area within 30m from the blasting area with water prior to blasting.	✓	✓	✓	✓	
AQ26	Dust Emission from Blasting	Cap 311. sub leg R Schedule IV S.27 (1), (2)	Wire mesh, gunnysack and sandbag should be used on top of the blast area on each shot to prevent flying rock and reduce fugitive dust generation.	✓			✓	
AQ27	Dust Emission from Blasting	Cap 311. sub leg R Schedule IV S.27 (1), (2)	Do not carry out blasting when the strong wind signal or tropical cyclone warning no. 3 is hoisted unless prior permission of the Commissioner of Mines is obtained.		✓	✓	✓	
AQ28	Dust Emission from Blasting	Cap 311. sub leg R Schedule IV S.27 (1), (2)	Blasting shall not be carried out when a Hong Kong Observatory Thunderstorm Warning is in force.		✓	✓	✓	
AQ29	Dust Emission from Blasting	Cap 311. sub leg R Schedule IV S.27 (1), (2)	Use of vacuum extraction drilling methods and sequenced the blasting works carefully.		✓		✓	
AQ30	Dust Emission from Blasting	Cap 311. sub leg R Schedule IV S.27 (1), (2); PS 26.13(4)(iv)	Firing of explosive shall be carried out in the morning prior to opening of the Park.	✓	✓	✓	✓	
AQ31	Dust Emission from Tunnel		Exhausts from tunnel ventilation should face away from sensitive receivers.	✓	✓	✓	✓	

# APPENDIX H – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Air Quality								
AQ32	Dust Emission from Tunnel		Forced ventilation shall be maintained in the tunnel to ensure noxious or asphyxiating gases do not accumulate. At the tunnel access shaft or portal the expelled air shall be vented to the atmosphere ensuring adequate diffusion of gases. Expelled air shall be directed away from nearby buildings.	✓	✓	✓	✓	
AQ33	Dust Emission from Tunnel		Tunnel ventilation containing high level of Total Suspended Particulates (TSP) shall be filtered at least to the satisfaction of the Safety and Environmental Officers prior to being vented to the atmosphere. The filters should be changed weekly to prevent blockages, which may affect the performance of the system.	✓		✓	✓	
AQ34	Dust Emission from Crushing Plant	PS 26.10(2)	The crushing plant shall be operated in accordance with the specified process licence.	✓		✓	✓	
AQ35	Gas Emission Smoke/fume from construction plants and equipments	Cap 311, sub leg C S.3	All plants and equipments should be well maintenance to avoid dark smoke.	✓		✓	An owner, who operates any plant in such a manner that any dark smoke is emitted for more than 6 minutes in any period of 4 hours or for more than 3 minutes continuously at any one time, commits an offence.	
AQ36	Smoke/fume from construction plants and equipments	Cap 311, sub leg A S.4, 5 & 6	Prior approval should be obtained before the installation of the emergency generator.	✓			N/A	Include in the design
AQ37	Smoke from open burning	Cap 311, sub leg O S.4 (1)	Open burning for the purpose of disposal of construction waste/tyres, the salvage of metal or the clearance of site in preparation for construction work is prohibited.			✓	✓	
AQ38	Smoke/fume from all site vehicles	Cap 374, sub leg A S.31(1)	Black smoke should be avoided from any vehicle whether or not mechanically propelled which is constructed or adapted for use on roads (exclude a vehicle of the North-west Railway or a tram)	✓		✓	✓	

## APPENDIX H – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Air Quality								
AQ39	Smoke/fume from all site vehicles	Cap 311, sub leg L Schedule I	Ensure the correct diesel used in any vehicle whether or not mechanically propelled which is constructed or adapted for use on roads (exclude a vehicle of the North-west Railway or a tram)		✓	✓	✓	
AQ40	Emission from spraying products	Cap 403, sub. leg C s.3	Ozone depleting paint sprayers shall not be used on sites.		✓	✓	✓	
Noise/Vibration								
NV01	Noise from construction work other than percussive piling	Cap 400, S.6(1), PS 26.11 (2)	Work required for the use of powered mechanical equipment (PME) in restricted hours, i.e. the hours between 7pm and 7am on weekdays or at any time on Sundays or a public holiday, for carrying out construction activity shall be required a valid Construction Noise Permit (CNP).		✓	✓	✓	
NV02	Noise Emission from construction plants and equipments	PS 26.11 (9)	Relocation of noise-emitting plant, the use of silencers, mufflers, acoustic sheds or shields or acoustic sheds or screens upon the best reasonable practice.	✓		✓	✓	
NV03	Noise Emission from construction plants and equipments	PS 26.11 (10)	Maintain all plant and silencing equipment in good condition so as to minimize the noise emission during the works.			✓	✓	
NV04	Noise Emission from construction plants and equipments	Cap 400, sub. leg. C, s17(1)	Compressors should have Noise Emission Labels (NELS).			✓	✓	
NV05	Noise Emission from construction plants and equipments	Cap 400, sub. leg. D, s17(1)	Hand held breakers should have Noise Emission Labels (NELS).			✓	✓	

## APPENDIX H – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Noise/Vibration								
NV06	Noise Emission from construction plants and equipments	PS 26.11 (13)(i)	<p>If the work causing serious noise pollution impacts or reached the Target Limit as stated in the Contractor’s EM&amp;A Manual, the Contractor shall provide the following proposed remedial measures:</p> <ul style="list-style-type: none"><li>• Change of construction equipment location and scheduling of activities;</li><li>• Change of construction equipment location and scheduling of activities;</li><li>• Installation of construction equipment soundproofing;</li><li>• Provision of alternative Contractor’s equipment;</li><li>• Erection of sound barriers around the part of the Site or the location of the construction noise source; or</li><li>• Any other measures that may be effective in reducing noise.</li></ul>	<div>✓</div>	<div>✓</div>	<div>✓</div>	<div>✓</div>	
NV07	Noise Emission from Blasting	PS 26.13(4)(iv)	Firing of explosive shall be carried out in the morning prior to opening of the Park.	<div>✓</div>	<div>✓</div>	<div>✓</div>	<div>✓</div>	
NV08	Noise Emission from Blasting	GEP Technical Guidance Note No. 25 (TGN 25)	Blast doors on tunnels to be closed during blasting if required by the blasting period.	<div>✓</div>		<div>✓</div>	<div>✓</div>	
NV09	Noise Emission for Vehicles	Cap 374, sub leg A S.30(1)	Every vehicle propelled by an internal combustion engine shall be fitted with a silencer, expansion chamber or other contrivance suitable and sufficient for reducing, as far as may be reasonable, the noise caused by the escape of the exhaust gases from the engine.	<div>✓</div>		<div>✓</div>	<div>✓</div>	

## APPENDIX H – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Water Quality (Refer to Drainage Management Plan as stated in PS 26.17(7))								
WQ01	Flooding and wastewater including surface runoff discharges from the construction site/work to inland coastal waters, communal sewers and drains	PS 26.12 (2)	Before commencing any site formation work, all sewer and drainage connection should be sealed to prevent debris, soil, sand and etc from entering public sewers/drains	✓		✓	The existing drainage system is in use and the temporary drainage system is under preparation	
WQ02		PS 26.12 (2)	The boundaries of critical areas of earthworks should be marked and surrounded by dykes or embankments for flood protection.	✓			N/A	
WQ03		PS 26.12 (2)	Wheel wash water shall be changed frequently and sediment removed regularly	✓		✓	✓	
WQ04		PS 26.12 (2)	Construction runoff related impacts associated with tunneling and above ground construction activities can be readily controlled through the use of appropriate mitigations measures which include: <ul style="list-style-type: none"><li>Use of sediment traps, oil interceptors; and</li><li>Adequate maintenance of drainage systems to prevent flooding and overflow.</li></ul>	✓	✓	✓	✓	
WQ05	Flooding and wastewater including surface runoff discharges from the construction site/work to inland coastal waters, communal sewers and drains	PS 26.12 (2)	Exposed areas should be minimised to reduce the potential for increased siltation, runoff contamination, and erosion.	✓	✓	✓	✓	
WQ06		EIA Ref. S9.44 EM&A Ref. S8.3	Temporary ditches should be provided to facilitate runoff discharge into the appropriate watercourses via silt retention points.	✓	✓	✓	✓	
WQ07		EPD ProPECC Note No. PN1/94; PS 26.17(6)(ii)	The design of efficient silt removal facilities should be based on the guidelines in Appendix A1 of ProPECC Note PN 1/94.	✓	✓		✓	

## APPENDIX H – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Water Quality (Refer to Drainage Management Plan as stated in PS 26.17(7))								
WQ08	Flooding and wastewater including surface runoff discharges from the construction site/work to inland coastal waters, communal sewers and drains	EP Clause2.13	To improve the coagulation and sedimentation process for construction phase discharges from excavation works at Headland, sand/silt removal facilities, including sand/silt traps and sediment basins should be provided.	✓		✓	O	Updated Drainage Proposal is being implemented
WQ09		PS 26.12(4)	All exposed earth areas should be completed as soon as possible after earthworks have been completed, or alternatively, within 14 days of the cessation of earthworks where practicable.		✓	✓	O	
WQ10		PS 26.12	If excavation of soil cannot be avoided during the rainy season, or at any time of year when rainstorms are likely, exposed slope surfaces should be covered by tarpaulin or other means.	✓	✓	✓	O	
WQ11		PS 26.12(6)(iv)	Sediment tanks of sufficient capacity are recommended as a general mitigation measure that can be used for settling surface runoff prior to disposal. The system capacity should be flexible and able to handle multiple inputs from a variety of sources and particularly suited to applications where the influent is pumped.	✓		✓	✓	
WQ12		PS 26.12(6)(ii)	All silt removal facilities will be inspected daily and cleaned whenever necessary.			✓	✓	
WQ13		PS 26.12(6)(iv)	Manholes (including newly constructed ones) should always be adequately covered and temporarily sealed so as to prevent silt, construction materials or debris being washed into the drainage system and storm runoff being directed in to foul sewers.		✓	✓	✓	

# APPENDIX H – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Water Quality (Refer to Drainage Management Plan as stated in PS 26.17(7))								
WQ14	Flooding and wastewater including surface runoff discharges from the construction site/work to inland coastal waters, communal sewers and drains	EP Clause2.12 & 2.14; PS 26.17(6)(iii)	Design and install a silt curtain system to enclose the existing 1000mm diameter storm water pipe outlet at Tai Shue Wan to minimize the water quality impacts on the marine environment during rainy seasons.	✓	✓		✓	Silt curtain proposal was deposited in the ELAO Register Office for public inspection.
WQ15		EPD ProPECC Note No. PN1/94; PS 26.17(8)(e)	Precautions should be taken at any time of year when rainstorms are likely. Actions to be taken when a rainstorm is imminent or forecast, and actions to be taken during or after rainstorms, are summarized in Appendix A2 or ProPECC Note PN 1/94. Particular attention should be paid to the control of silty surface runoff during storm events, especially for areas located near steep slopes.			✓	✓	Heavy rain procedures
WQ16		PS 26.12(6)(i)	Oil interceptors should be provided in the drainage system and these should be regularly cleaned to prevent the release of oils and grease into the storm water drainage system after accidental spillages. The interceptor should have a bypass to prevent flushing during periods of heavy rain.	✓			✓	
WQ17		PS 26.12(2)	All vehicles and plant should be cleaned before leaving a construction site to ensure no earth, mud, debris and the like is deposited on roads.			✓	✓	
WQ18		PS 26.12	Measures should be taken to prevent the washing away of construction materials, soil, silt or debris into any drainage system.	✓			✓	
WQ19		PS 26.12(6)(iii)	An adequately designed and located wheel washing bay should be provided at every site exit and wash-water should have sand and silt settled out and removed at least on a weekly basis to ensure the continued efficiency of the process.	✓			✓	



## APPENDIX H – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Water Quality (Refer to Drainage Management Plan as stated in PS 26.17(7))								
WQ20	Flooding and wastewater including surface runoff discharges from the construction site/work to inland coastal waters, communal sewers and drains	PS 26.12	The section of access road leading to, and exiting from, the wheel wash bay to the public road should be paved with sufficient backfall towards the wheel wash bay towards the wheel wash bay to prevent transport of soils and silty water to public roads and drains.	✓			✓	
WQ21		PS 26.12	Open stockpiles of construction materials of more than 50m <sup>3</sup> should be covered with tarpaulin or similar fabric.			✓	✓	
Drainage and Sewage (Refer to Drainage Management Plan as stated in PS 26.17(7) and Drainage Proposals as stated in EP Clause 2.13)								
DS01	Polluted water discharge from construction site or works	PS 26.17(4)	All temporary and permanent drainage pipes and culverts provided to facilitate runoff discharges should be adequately designed for the controlled release of storm flow (one in five year event).	✓			✓	Drainage Proposal
DS02	Polluted water entry stormwater system during the site activities	PS 26.17(6)	All sediment control measures should be regularly inspected and maintained to ensure proper and efficient operation at all times and particularly following rain storms.	✓		✓	✓	
DS03	Polluted water from site reinstatement	PS 26.17(2)	Temporarily diverted drainage systems should be reinstated to their original condition when the construction work has finished, or the temporary diversion is no longer required.				✓	Note
DS04	Polluted water from concrete lorry washing	PS 26.17	Wash water from concrete trucks and pumps is to be collected in skips for treatment.	✓		✓	✓	
DS05	Polluted water from the plant yard	WMP	Plant maintenance areas to be enclosed.	✓			✓	
DS07	Polluted water entry from waste collected area	PS 26.18(2)	Debris and rubbish on site should be collected, handled and disposed of properly to avoid entering the water column to cause water quality impacts.	✓		✓	✓	

## APPENDIX H – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Drainage and Sewage (Refer to Drainage Management Plan as stated in PS 26.17(7) and Drainage Proposals as stated in EP Clause 2.13)								
DS06	Polluted water from excavation	PS 26.17(6)(ii)	Temporary open storage of excavated materials used for backfill on site should be covered with tarpaulin or similar fabric during rainstorms. Any washout of construction or excavated materials should be diverted through appropriate sediment traps before discharge to storm water drainage systems.			✓	✓	
DS08	Polluted water and sewage entry the chemical toilets	PS 26.12(3)	Construction sewage may need to be handled by portable chemical toilets if construction workers are likely to be dispersed along the alignment.	✓			✓	
DS09	Polluted water and sewage entry the chemical toilets	PS 26.12(3)	Appropriate numbers of portable toilets should be provided by a licensed contractor to serve the construction workers. This contractor will also be responsible for waste disposal and maintenance practices.	✓			✓	
DS10	Polluted water from chemical storage area	PS 26.12(9)	All fuel tanks and storage areas should be provided with locks and be located on sealed areas, within bunds of a capacity equal to 110% of the storage capacity of the largest tank, to prevent spilled fuel oils from reaching WSRs.	✓			✓	
DS11	Polluted water from spillage	WMP; PS 26.12(10)	Spill action plan is to be prepared.			✓	✓	Spill procedures
DS12	Polluted water from petrol filling activity	WMP; PS 26.17(8)(1)	Petrol interception for oil filling point.	✓			✓	
DS13	Polluted water from tunnel pump out	PS 26.17(8)	Ground water pumped from tunnels etc., should be discharged into drainage channels that incorporate sediment traps to entrance deposition rates and to remove silt.	✓			N/A	
DS14	Polluted water from construction works	PS 26.17(8)(i)	Construction work force sewage discharges on site should be connected to the existing trunk sewer or sewage treatment facilities, if practicable.	✓		✓	✓	

# APPENDIX H – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Drainage and Sewage (Refer to Drainage Management Plan as stated in PS 26.17(7) and Drainage Proposals as stated in EP Clause 2.13)								
DS15	Polluted water from pantry	PS 26.17(8)(k)	Wastewater collected from pantry including that from basins, sinks and floor drains, should be discharged into foul sewers via grease traps capable of providing at least 20 minutes retention during peak flow.	✓			✓	
Waste Management (Refer to Waste Management Plan as stated in EP Clause 2.21)								
WM01	Disposal of waste (general)	PS 26.18	Minimize the generation of waste from Works. Avoidance and minimization of waste generation shall be achieved through changing or improving design and practices, careful planning and good site management.			✓	✓	Note
WM02	Disposal of waste (general)	PS 26.18	Different types of waste are segregated on-site and stored in different containers, skips or stockpiles to facilitate the reuse/recycling of materials, thus avoiding disposal (generally with only limited processing and reprocessing may be required).	✓		✓	✓	
WM03	Disposal of waste (general)	WMP	A trip ticket system for the disposal of Construction and Demolition (C&D) materials following the guidelines stipulated in the Environment, Transport and Works Bureau Technical Circular (Works) No. 31/2004 shall be used to prevent any illegal dumping.			✓	✓	
WM04	Disposal of waste (general)	PS 26.18	No construction waste of more than 20% inert material by volume shall be disposed of to landfill. Inert materials like rock, sand, concrete debris should be sorted out from construction waste before disposal. Dry concrete waste or the excavated materials should be recycled for reuse or sorted for disposal at public dumps.			✓	✓	
WM05	Generation and disposal of construction and demolition waste	WMP; PS 26.18	All non-inert construction waste material deemed unsuitable for reclamation or land formation and all other waste material shall be disposed at public dumps.	✓		✓	✓	Note

## APPENDIX H – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Waste Management (Refer to Waste Management Plan as stated in EP Clause 2.21)								
WM06	Generation and disposal of construction and demolition waste	WMP; PS 26.18	The C&D materials shall be sorted into public fill (inert portion) and C&D waste (non-inert portion). The inert portion which comprises soil, rock, concrete, brick, cement plaster/mortar, inert building debris, aggregates and asphalt shall be reused in earth filling, reclamation or site formation works as far as possible. Where excavated rock is of the appropriate grade, it shall be crushed and reused as aggregate or for other surfacing uses, wherever possible.  The non-inert portion, which comprises metal, timber, paper, glass, junk and general garbage shall be reused or recycled.	✓	✓	✓	✓	
WM07	Disposal of waste (general)	WMP; PS 26.18	Record of the amount of waste generated, recycled and disposed of shall be kept on site for easy reference and checking.			✓	✓	
WM08	Disposal of waste (general)	WMP; PS 26.18	Authorized/Licensed Waste Hauliers/Collectors should be used to collect and transport different category wastes to the appropriate disposal points.			✓	✓	
WM09	Disposal of waste (general)	WMP; PS 26.18	Handle and store wastes in a manner, which ensures that they are held securely without loss or leakage, thereby minimizing the potential for pollution.			✓	✓	Note
WM10	Disposal of waste (general)	WMP; PS 26.18	Remove wastes in a timely manner and maintain the waste storage areas clean regularly.			✓	✓	
WM11	Disposal of waste (general)	WMP; PS 26.17(8)	Regular cleaning and maintenance the drainage system, sumps, oil interceptors and grease traps. The waste from these facilities shall be collected and disposed of by a licensed Collector.	✓		✓	✓	

## APPENDIX H – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Waste Management (Refer to Waste Management Plan as stated in EP Clause 2.21)								
WM12	Disposal of waste (general)	WMP	Obtain the necessary permits and licenses with regards to the waste management from the appropriate authorities wherever necessary, in accordance with <ul style="list-style-type: none"><li>The Waste Disposal Ordinance (Cap 354),</li><li>Waste Disposal (Chemical Waste)(General) Regulation (Cap 354),</li><li>The Crown Land Ordinance (Cap 28), and</li><li>Dumping at Sea Ordinance (Cap 466)</li></ul>			✓	✓	
WM13	Disposal of waste (general)	WMP	Provide training for workers about the concepts of site cleanliness and appropriate waste management procedures, including waste reduction, reuse and recycling.			✓	✓	
WM14	Generation and disposal of construction and demolition waste	WMP & WBTC 5/99 (Appendix A)	The Contractor shall produce a Construction and Demolition Material Disposal Delivery Form (the Form) for each and every vehicular trip transporting Construction and Demolition (C&D) materials off-site. The Contractor shall complete the Form and maintain records as per procedures.			✓	✓	
WM15	Production of Chemical Waste (general)	Magnitude	For those processes that generate chemical waste, it may be possible to find alternatives that generate reduced quantities or even no chemical wastes, or less dangerous types of chemical waste	✓	✓		✓	
WM16	Production of Chemical Waste (general)	Cap 354 sub. leg. C; PS 26.18 (4)	The Contractor shall be required to register with EPD as a chemical waste producer and to follow the guidelines as stated in the Code of Practice on the Packaging, Labeling and Storage of Chemical Wastes.				✓	Register as chemical waste producer has done

# APPENDIX H – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Waste Management (Refer to Waste Management Plan as stated in EP Clause 2.21)								
WM17	Storage of Chemical Waste	Cap 354 sub. leg. C s. 13, 14, 15, 16, 18 & 19; PS 26.18(4)	<p>Chemical waste that is produced, as defined by Schedule 1 of the Waste Disposal (Chemical Waste)(General) Regulation, should be handled in accordance with the Code of Practice on the Packaging, Labeling and Storage of Chemical Wastes as follows:</p> <ul style="list-style-type: none"><li>A suitable area (special container(s) would be proposed to use) for temporary storage of chemical waste shall be provided. The best location for the storage area shall be located close to the source of chemical waste generation.</li><li>The container used for the storage of chemical waste should be used for chemical waste only and kept clean and dry all the times.</li><li>The container shall be suitable for the substance they are holding, resistant to corrosion, maintained in a good condition, and securely closed.</li><li>The container should have a capacity of less than 450 l unless the specifications have been approved by EPD.</li><li>If the container is not used as the storage, the storage area shall be enclosed on at least three sides by a wall, partition or fence with a height of not less than 2m or the total height in stack, whichever is less.</li><li>Adequate ventilation shall be allowed by leaving some space between the top of the enclosure walls and ceiling, or provision of louvers on the sides of the enclosure walls.</li></ul>	<div>✓</div> <div>✓</div> <div>✓</div> <div>✓</div> <div>✓</div> <div>✓</div>		<div>✓</div> <div>✓</div> <div>✓</div> <div>✓</div> <div>✓</div> <div>✓</div>		

## APPENDIX H – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Waste Management (Refer to Waste Management Plan as stated in EP Clause 2.21)								
WM17 (contd)	Storage of Chemical Waste	Cap 354 sub. leg. C s. 13, 14, 15, 16, 18 & 19; PS 26.18(4)	<ul style="list-style-type: none"><li>The storage area should have an impermeable floor and bunding of sufficient capacity to accommodate 110% of the volume of the largest container or 20% of the total volume of waste stored in that area, whichever is the greatest</li><li>The storage area should be covered to prevent rainfall entering (water collected within the bund must be tested and disposed as chemical waste if necessary)</li><li>Every chemical waste storage area should display a hazard-warning panel, notice or marking at or near the entrance or opening of the storage area in English and Chinese characters “CHEMICAL WASTE” and “化學廢物” clearly and boldly in red on a white background with a letter/character size of not less than 60mm high.</li></ul>	✓   <				

## APPENDIX H – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Waste Management (Refer to Waste Management Plan as stated in EP Clause 2.21)								
WM22	Generation of general refuse	WMP	General refuse generated on site should be stored in enclosed bins or compaction units separate from construction and chemical wastes. A reputable waste collector should be employed to remove general refuse from the site, separately from construction and chemical wastes, on a daily or every second day basis to minimize odour, pest and litter impacts.	✓		✓	✓	
WM23	Generation of general refuse	Magnitude	General refuse will be generated largely by food service activities on site, so reusable rather than disposable dishware should be used if feasible. Individual collectors often recover aluminum cans from the waste stream if they are segregated or easily accessible, so separate labeled bins for their deposit should be provided wherever feasible.	✓		✓	✓	
Ecology								
EC01	Ozone Emission entry the ambient environment	PS 26.08 (3) (i)	Ozone depleting fire extinguishers shall not be used for temporary firefighting measures and ozone depleting substances shall not be used in carrying out the Works.				✓	Note restriction
EC02	Disturbance the marine ecological sensitive receivers	EP Clause 2.12; PS 26.14(5)	Divert the construction phase discharges from excavation works at Headland to an existing 1000mm diameter storm water pipe outlet at Tai Shue Wan to avoid impacts on coral communities in the marine water around the Nam Long Shan headland.	✓		✓	✓	Drainage Proposal
EC03	Disturbance the marine ecological sensitive receivers	EP Clause 2.15	No marine-based construction works shall be allowed for the Project to conserve the marine ecological resources in the vicinity of the project area.	✓	✓	✓	✓	



# APPENDIX H – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Ecology								
EC04	Disturbance the ecological sensitive receivers	EP Clause 2.17 & PS 26.14 (1)	The site clearance works before bulk excavation to the existing mountain to provide a new platform for the Summit shall commence before or outside the breeding season of Black Kites, i.e. from October to May of the next year.	✓	✓	✓	✓	
EC05	Disturbance the ecological sensitive receivers	PS 26.14 (2)	Design of temporary conveyor belt system and the location of temporary adit portals should be considered to avoid impact to potential nest sites in the tall shrubland habitat at Tai Shue Wan area where possible.	✓	✓	✓	✓	
EC06	Disturbance the ecological sensitive receivers	EP Clause 2.19	No construction works and discharge from the construction site(s) shall be allowed within the existing freshwater ponds at the Tai Shue Wan area and within the enhanced Pond 35 after enhancement works.	✓		✓	✓	
EC07	Disturbance the ecological sensitive receivers	EM&A section 6.2.5	Minimize the impact due to construction on the existing surrounding vegetation by:					
			• Set up of temporary tree nurseries;	✓			✓	
			• Designation of “no-intrusion zones” and to record any trespass, including the damage to the existing vegetation;			✓	✓	
			• Hill fire prevention;			✓	✓	
			• Dust and erosion control for exposed soil; and	✓		✓	✓	
			• Well-planned irrigation networks throughout the establishment period.	✓	✓	✓	✓	

## APPENDIX H – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Ecology								
EC08	Disturbance the ecological sensitive receivers	EM&A section 7.17 & EIA section 5.138	<p>Minimize the impact due to construction on the uncommon plant species by:</p> <ul style="list-style-type: none"><li>Vegetation survey and subsequent transplantation of locally uncommon or restricted species as far as practicable;</li><li>Trees located within the works areas shall be preserved as far as practicable;</li><li>Placement of equipment or stockpile in designated works areas and access routes selected on existing disturbed land to minimize disturbance to natural habitats;</li><li>Construction activities shall be restricted to the works areas that would be clearly demarcated;</li><li>The work areas shall be reinstated immediately after the completion of works;</li><li>Landscaping works on newly formed land shall as far as possible make use of native plant species.</li></ul>	<div>✓</div> <div>✓</div> <div>✓</div> <div>✓</div> <div>✓</div>	<div>✓</div> <div>✓</div> <div>✓</div>	<div>✓</div> <div>✓</div> <div>✓</div> <div>✓</div> <div>✓</div>	Uncommon or restricted species including Long Tentacle Orchid, Sword-leaved Orchid, Green-flowered Rattlesnake-Plantain, Cycad-fern, Balloon Flower and Chinese Lily	
Hazard to Life								
HL01	Hazard to life due to blasting activities	EM&A section 11.3 & EIA Section 12.15	The blasting activities shall be inspected and audited at practical intervals to ensure that the assumptions and recommendations from the Quantitative Risk Assessment (QRA) study are implemented.	✓	✓	✓	✓	
HL02			The recommendations from the systematic hazard identification are consistently implemented in accordance with the intent of the hazard to life assessment.	✓	✓	✓	✓	

## APPENDIX H – SUMMARY OF ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

No.	Environmental Aspect	Requirement (Classification)	Aspect Mitigation	Delivery Method			Status	Other / Remarks
				Site Installation	Method Statement	Toolbox Talk		
Landscape and Visual								
LV01	Visual and Appearance considerations	EM&A Section 6.2.5	Minimize the visual and appearance impact by:  1. careful choice between ‘impermeable’ and ‘permeable’ hoardings.  2. control over the appearance of construction workers, construction plants/ machines.  3. proper screening and careful alignment of the temporary barging point and conveyor system.  4. careful selection of security floodlights to avoid light pollution.	<div>✓</div> <div>✓</div> <div>✓</div>		<div>✓</div> <div>✓</div> <div>In the design</div> <div>✓</div>		
Cultural and Heritage Impact								
CH01	Cultural and Heritage Impact	EP clause 2.22	To preserve the grave G1, no works shall be allowed within one metre from the vicinity of such grave.	<div>✓</div>		<div>✓</div>	<div>✓</div>	Note requirement

Notes:

- EP denotes the Environmental Permit No. 249/2006 and its subsequent permits.
- EM&A Manual denotes the Contractor specific EM&A Manual.
- WMP denotes the Waste Management Plan.
- EIA denotes the Final EIA Report No. AEIAR-101/2006.
- PS denotes the Particular Specification of the Project.
- ✓ denotes implemented.
- denotes to be implemented.

## APPENDIX I – EVENT AND ACTION PLANS

### Event/Action Plan for Air Quality Monitoring

Event Action Level	Action			
	CET	Contractor	PMR	IEC
Exceedance for one sample	<ol style="list-style-type: none"> <li>1. Identify source.</li> <li>2. Notify IEC, PMR and Contractor.</li> <li>3. Conduct additional monitoring to investigate the causes.</li> <li>4. Report the investigation results and if exceedance is due to contractor's construction works to the IEC, PMR and Contractor.</li> <li>5. Increase monitoring frequency to once per 2 days for 24-hour TSP and daily for 1-hour TSP until exceedance stops if exceedances are considered related to contractor's construction works and report the results to IEC, PMR and Contractor.</li> </ol>	<ol style="list-style-type: none"> <li>1. Take immediate action to avoid further exceedance and rectify any unacceptable practice.</li> <li>2. Submit air mitigation proposal to IEC and PMR for agreement if CET indicated that exceedance is related to the construction works.</li> <li>3. Implement agreed proposal within a time scale agreed with PMR and IEC.</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm receipt of notification of failure in writing.</li> <li>2. Notify Contractor.</li> <li>3. Require Contractor to submit air mitigation proposal.</li> <li>4. Ensure remedial measures are properly implemented.</li> </ol>	<ol style="list-style-type: none"> <li>1. Review monitoring data and investigation report submitted by CET.</li> <li>2. Review Contractor's air mitigation proposal and advise the PMR accordingly.</li> <li>3. Supervise and confirm in writing the implementation of remedial measures.</li> </ol>
Exceedance for two or more consecutive samples	<ol style="list-style-type: none"> <li>5. Identify source.</li> <li>6. Notify EPD, IEC, PMR and Contractor.</li> <li>7. Conduct additional monitoring to investigate the causes.</li> <li>8. Report the investigation results and if exceedances are due to contractor's construction works to EPD, IEC, PMR and Contractor within 3 working days after additional monitoring.</li> <li>9. Increase monitoring frequency to daily for 24-hour TSP and 1-hour TSP if exceedances are considered related to contractor's construction works until exceedance stops, and report the results to EPD, IEC, PMR and Contractor.</li> <li>10. If exceedances continue after 1-week monitoring events, request PMR to arrange meeting with PMR, IEC and contractor to discuss remedial actions.</li> </ol>	<ol style="list-style-type: none"> <li>1. Take immediate action to avoid further exceedance and rectify any unacceptable practice.</li> <li>2. In consultation with the IEC, submit air mitigation proposal to IEC and PMR for agreement within 3 working days of notification if ET indicated that exceedances are related to construction works.</li> <li>3. Implement agreed proposal within a time scale agreed with PMR and IEC.</li> <li>4. Amend working methods if appropriate.</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm receipt of notification of failure in writing.</li> <li>2. Notify Contractor.</li> <li>3. Require Contractor to submit air mitigation proposal.</li> <li>4. Ensure remedial measures are properly implemented.</li> </ol>	<ol style="list-style-type: none"> <li>1. Review monitoring data and investigation report submitted by CET.</li> <li>2. Discuss amongst PMR, CET and Contractor in order to formulate air mitigation proposal.</li> <li>3. Review Contractor's air mitigation proposal and advise the PMR accordingly.</li> <li>4. Supervise and confirm in writing the implementation of remedial measures.</li> </ol>

**APPENDIX I – EVENT AND ACTION PLANS (CONT'D)**

**Event/Action Plan for Air Quality Monitoring**

Event Limit Level	Action			
	CET	Contractor	PMR	IEC
Exceedance for one sample	<ol style="list-style-type: none"> <li>1. Identify source.</li> <li>2. Notify EPD, IEC, PMR and Contractor.</li> <li>3. Conduct additional monitoring to investigate the causes.</li> <li>4. Report the investigation results and if exceedances are due to contractor's construction works to EPD, IEC, PMR and Contractor within 3 working days after additional monitoring.</li> <li>5. Increase monitoring frequency to daily if exceedances are considered related to contractor's construction works until exceedance stops, and report the results to EPD, IEC, PMR and Contractor.</li> </ol>	<ol style="list-style-type: none"> <li>1. Take immediate action to avoid further exceedance and rectify any unacceptable practice</li> <li>2. In consultation with the IEC, submit air mitigation proposal to IEC and PMR for agreement within 3 working days of notification if CET indicated that exceedances are related to construction works</li> <li>3. Implement agreed proposal within a time scale agreed with PMR and IEC.</li> <li>4. Amend working methods if appropriate.</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm receipt of notification of failure in writing.</li> <li>2. Notify Contractor.</li> <li>3. Require Contractor to submit air mitigation proposal.</li> <li>4. Ensure remedial measures are properly implemented.</li> </ol>	<ol style="list-style-type: none"> <li>1. Review monitoring data and investigation report submitted by CET.</li> <li>2. Discuss amongst PMR, CET and Contractor in order to formulate air mitigation proposal.</li> <li>3. Review Contractor's air mitigation proposal and advise the PMR accordingly.</li> <li>4. Supervise and confirm in writing the implementation of remedial measures.</li> </ol>
Exceedance for two or more consecutive samples	<ol style="list-style-type: none"> <li>1. Identify source.</li> <li>2. Notify EPD, IEC, PMR and Contractor.</li> <li>3. Conduct additional monitoring to investigate the causes.</li> <li>4. Report the investigation results and if exceedances are due to contractor's construction works to EPD, IEC, PMR and Contractor within 3 working days after additional monitoring.</li> <li>5. Increase monitoring frequency to daily if exceedances are considered related to contractor's construction works until exceedance stops, and report the results to EPD, IEC, PMR and Contractor.</li> <li>6. If exceedances continue after 2 consecutive monitoring events, request PMR to arrange meeting with IEC and contractor to discuss remedial actions.</li> </ol>	<ol style="list-style-type: none"> <li>1. Take immediate action to avoid further exceedance and rectify any unacceptable practice.</li> <li>2. In consultation with the IEC, submit air mitigation proposal to IEC and PMR for agreement within 3 working days of notification if CET indicated that exceedances are related to construction works.</li> <li>3. Implement agreed proposal within a time scale agreed with PMR and IEC.</li> <li>4. Amend working methods and proposal if appropriate.</li> <li>5. Stop relevant portion(s) of works as required by PMR, CET and IEC.</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm receipt of notification of failure in writing.</li> <li>2. Notify Contractor.</li> <li>3. Require Contractor to submit air mitigation proposal.</li> <li>4. Ensure remedial measures are properly implemented.</li> <li>5. If exceedances continue arrange meeting with Contractor, IEC and CET and to consider what portion(s) of works should be further mitigated or have to stop.</li> </ol>	<ol style="list-style-type: none"> <li>1. Review monitoring data and investigation report submitted by CET.</li> <li>2. Discuss amongst PMR, CET and Contractor in order to formulate air mitigation proposal.</li> <li>3. Review Contractor's air mitigation proposal and advise the PMR accordingly.</li> <li>4. Supervise and confirm in writing the implementation of remedial measures.</li> </ol>

## APPENDIX I – EVENT AND ACTION PLANS (CONT'D)

### Event/Action Plan for Regular Construction Noise Monitoring


Event	Action			
	CET	Contractor	PMR	IEC
Action Level Exceedance	<ol style="list-style-type: none"> <li>1. Identify source.</li> <li>2. Notify IEC, PMR and Contractor.</li> <li>3. Conduct additional noise monitoring to investigate the causes.</li> <li>4. Report the investigation results to the IEC, PMR and Contractor.</li> <li>5. Discuss with Contractor for their formulation of remedial measures if the exceedance is related to construction works.</li> <li>6. Conduct additional monitoring to check mitigation effectiveness.</li> </ol>	<ol style="list-style-type: none"> <li>1. Take immediate action to avoid further exceedance.</li> <li>2. Submit noise mitigation proposals to ET, PMR and IEC.</li> <li>3. Implement noise mitigation proposals.</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm receipt of notification of failure in writing.</li> <li>2. Notify Contractor.</li> <li>3. Require Contractor to propose remedial measures for the analysed noise problem.</li> <li>4. Ensure remedial measures are properly implemented.</li> </ol>	<ol style="list-style-type: none"> <li>1. Review the analysed results submitted by the CET.</li> <li>2. Review the proposed remedial measures by the Contractor and advise the PMR accordingly.</li> <li>3. Supervise and confirm in writing the implementation of remedial measures</li> </ol>
Limit Level Exceedance	<ol style="list-style-type: none"> <li>1. Identify source.</li> <li>2. Notify EPD, IEC, PMR and Contractor.</li> <li>3. Conduct additional noise monitoring and analyse Contractor's working procedures to determine possible cause of exceedance.</li> <li>4. Provide interim report to EPD, IEC and PMR on the causes and proposed actions to be taken for the exceedances if exceedance is related to construction works.</li> <li>5. Assess effectiveness by additional monitoring and report to EPD, IEC, PMR and Contractor the results.</li> <li>6. If exceedance stops, cease additional monitoring.</li> </ol>	<ol style="list-style-type: none"> <li>1. Take immediate action to avoid further exceedance.</li> <li>2. Submit proposals for remedial actions to CET, PMR and IEC within 3 working days of notification.</li> <li>3. Implement the agreed proposals.</li> <li>4. Resubmit proposals if problem still not under control.</li> <li>5. Stop the relevant portion of works as determined by the PMR until the exceedance is abated.</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm receipt of notification of failure in writing.</li> <li>2. Notify Contractor.</li> <li>3. Require Contractor to propose remedial measures for the analysed noise problem.</li> <li>4. Ensure remedial measures are properly implemented.</li> <li>5. If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated.</li> </ol>	<ol style="list-style-type: none"> <li>1. Discuss amongst PMR, CET and Contractor on the potential remedial actions.</li> <li>2. Review Contractor's remedial actions whenever necessary to assure their effectiveness and advise the PMR accordingly.</li> <li>3. Supervise and confirm in writing the implementation of remedial measures.</li> </ol>

**APPENDIX I – EVENT AND ACTION PLANS (CONT'D)**

**Event/Action Plan for Subtidal Monitoring**

<b>Event</b>	<b>CET</b>
Action Level Exceedance	<p><b>Step 1 -</b> Inform the IEC, ER, Contractor, Project Proponent, EPD, and AFCD and discuss the most appropriate method of reducing sediment in the discharge (e.g. check and increase effectiveness of construction site drainage and sediment and other site run-off removal facilities)</p> <p><b>Step 2 -</b> Audit the implementation of mitigation measures on site.</p> <p><b>Step 3 -</b> If non-compliance continues, check and confirm the effectiveness of mitigation measures and repeat monitoring survey measurements.</p>
Limit Level Exceedance	<p>Undertake <b>Steps 1-3</b>.</p> <p>If further exceedance of Limit Level, suspend construction works until an effective solution is identified.</p> <p>Once the solutions have been identified and agreed with all parties, construction works may commence.</p>

## APPENDIX J – COMPLAINT FLOW DIAGRAM AND COMPLAINT LOG

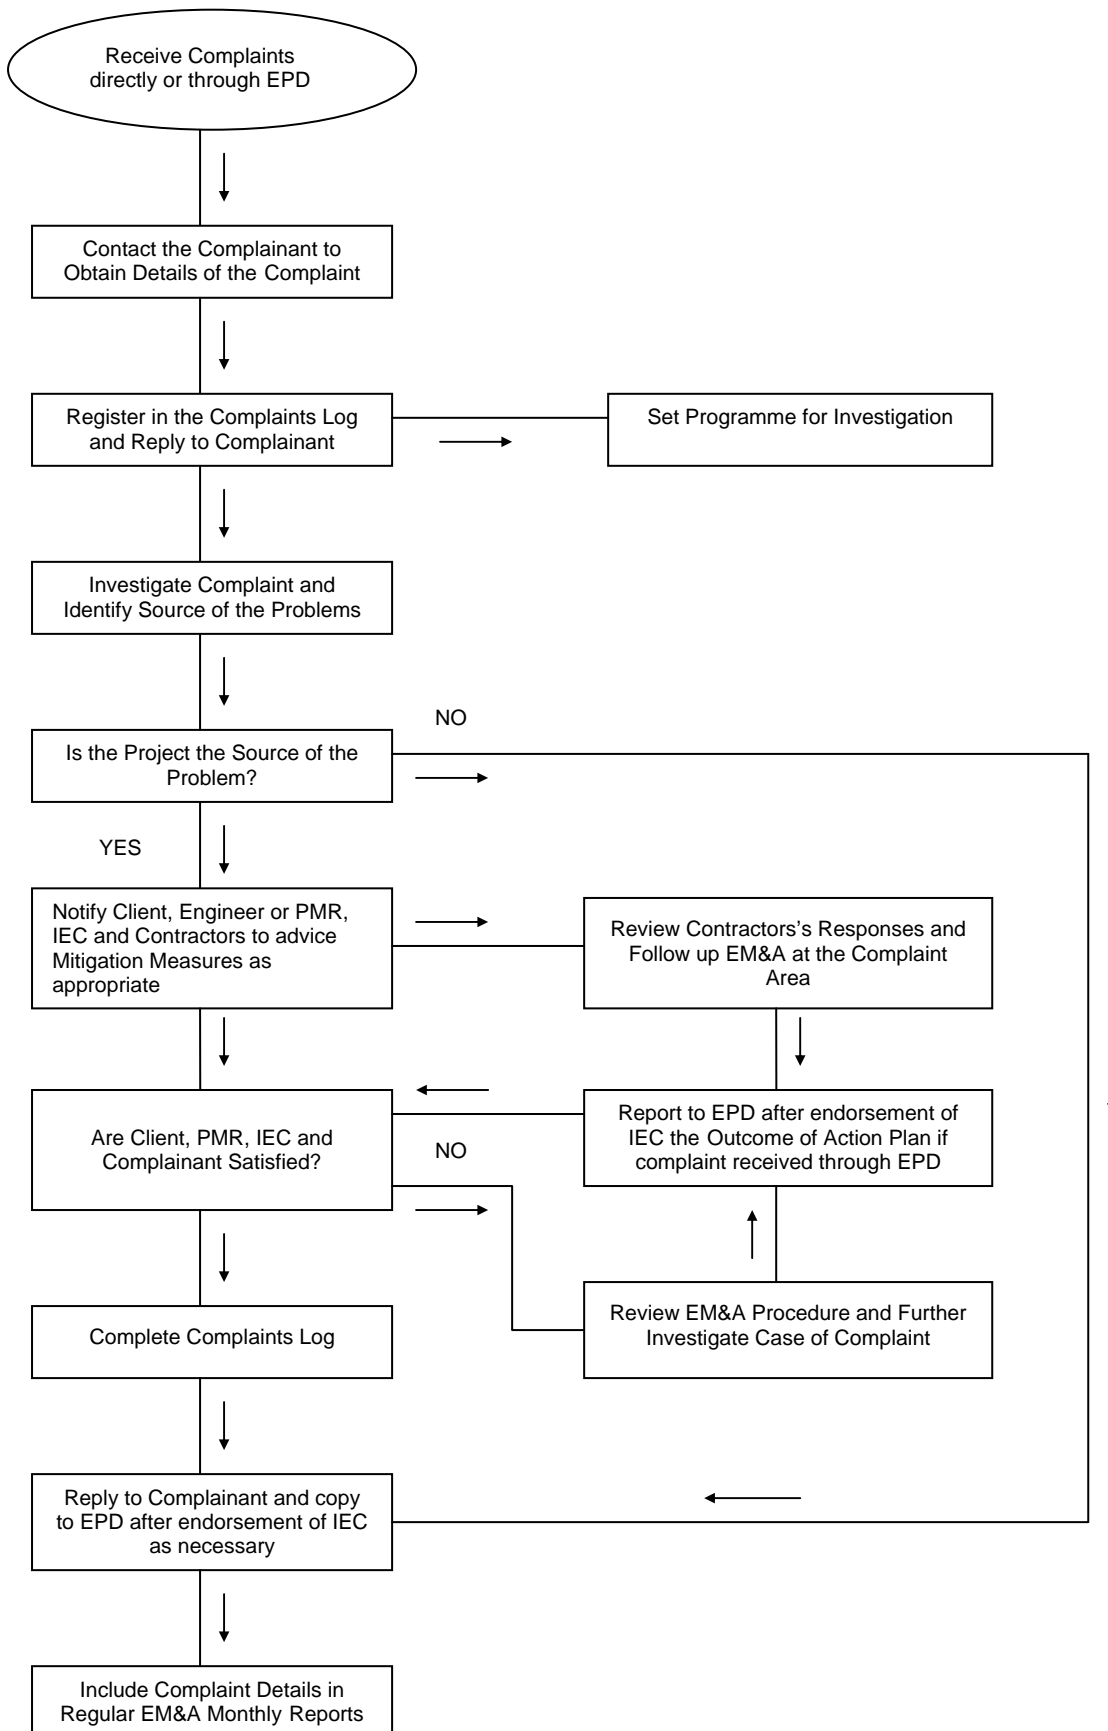



**COMPLAINT RECORD REGISTER**

Record ID	Date Received	Type (PMR / EPD / Public / Others, please specify)	Description	Responsible Project	Justified complaint?	Status (Open / Closed)
OPE/DBJV/PROJ/QSE/ECR/001	05-Nov-07	Public thro' EPD	The complainant claimed that dust nuisance was observed at Tai Shue Wan on 03-Nov-07.	CI05	N/A	The inspector of EPD came to the scene on 05-Nov-07 and no significant observation was made, hence the complaint was closed.
OPE/DBJV/PROJ/QSE/ECR/002	09-Jan-08	Public thro' OPC	The complainant claimed that noise nuisance was heard from the Ocean Park construction sites during the restricted hours	CI05	Justified	Under investigation, the noise nuisance was concluded from the soft ground tunnel support work adjacent to GPH. Rock breaking had to be carried out within the tunnel works areas due to safety and emergency in order to prevent the collapse of the ground support structure.
OPE/DBJV/PROJ/QSE/ECR/003						With regards to the complaints, immediate action was taken and summarized as follows: <ul style="list-style-type: none"> <li>The enclosure and the acoustic doors have been built and completed on 21-Jan-08; and</li> <li>Surveillance was stepped up in order to ensure that timely actions could be taken to rectify any complaints.</li> </ul>
OPE/DBJV/PROJ/QSE/ECR/004	13-Feb-08	Public thro' EPD	The complainant claimed that noise nuisance was heard from the Ocean Park construction sites during the restricted hours at Tai Shue Wan	CI05	Justified	With regards to the complaints, immediate action was taken and summarized as follows: <ul style="list-style-type: none"> <li>Additional noise control measures, including noise enclosure at the junction of the conveyors at Tai Shue Wan; and</li> <li>Well manage the working sequence in order to minimize the impacts to the vicinity.</li> </ul>
OPE/DBJV/PROJ/QSE/ECR/005	12-Mar-08	Public thro' EPD	The resident from Broadview Court claimed that noise nuisance from the night works at Nam Long Shan Road	CI05	Justified	With regards to the complaint, investigation has conducted and the findings and action to be taken were summarized as follows: <ul style="list-style-type: none"> <li>Movable noise panels and the noise shield have been used during the breaking works. The potential cause of the noise nuisance might be the panels were not placed properly and the noise emitted from the gap. The in-charge foreman has been reminded to place the panels properly in order to minimize the noise nuisance to the vicinity.</li> </ul>
OPE/DBJV/PROJ/QSE/ECR/006	13-Mar-08	Public thro' EPD	The complainant claimed that noise nuisance from the night works at Nam Long Shan Road	CI05	Justified	Please refer to the findings of Record ID No. OPE/DBJV/PROJ/QSE/ECR/005
OPE/DBJV/PROJ/QSE/ECR/007	20-Mar-08	Public thro' EPD	The complainant claimed that noise nuisance from the night works at Nam Long Shan Road	CI05	Justified	With regards to the complaint, investigation has conducted and the findings could not made any conclusions. In this context, the in-charge engineer/foreman of each CNP has notified and reminded that all requirements under the CNP should be complied with all the times.
OPE/DBJV/PROJ/QSE/ECR/008	15-Mar-08	Public thro' EPD	The complainant claimed that dust nuisance from the crusher, Nam Long Shan Road	CI05	Justified	With regards to the complaint, action was taken as follows: <ul style="list-style-type: none"> <li>Enhance the water spraying, especially the frequency, in order to minimize the dust nuisance to the vicinity.</li> </ul> Besides, the length of dust screen was extended to increase the coverage area of stockpile to minimize the dust nuisance due to strong wind.
OPE/DBJV/PROJ/QSE/ECR/009	19-Mar-08	Public thro' EPD	The complainant claimed that noise from the temporary steel plates over trenches at Nam Long Shan Road	CI05	Justified	With regards to the complaint, immediate action was taken and summarized as follows: <ul style="list-style-type: none"> <li>Inform the in-charge foreman to provide sufficient sandbags or rubber pad before placing the temporary steel plates back to cover the trench.</li> </ul>
OPE/DBJV/PROJ/QSE/ECR/010	25-Mar-08	Public thro' EPD	Police Training School claimed that dust nuisance from CI12C to the school	CI05	Justified	With regards to the complaint, immediate action was taken and summarized as follows: <ul style="list-style-type: none"> <li>Inform the in-charge foreman to increase the frequency of water spraying of the exposed areas.</li> </ul>

## **APPENDIX K – CONSTRUCTION PROGRAMME**

	Early Start	Activity Description
--	----------------	-------------------------

CI05 - Tunnel, Site Formation & Misc.

Cost Centre B-Misc. Site Formation at Waterfront

Construction

B4 - Access Rd to Astounding Asia at Waterfront

12/SEP/07A	Access Rd from Ch. 100 - 300
18/FEB/08A	Access Road Remaining Works

Cost Centre C-Misc. Site Formation at Summit

Construction

C1/C2/C6 - Preparation Works - Summit Excav

17/MAR/08	Drainage Works at Tai Shue Wan
-----------	--------------------------------

C1 / C2 / C5 - Summit Excavation

21/JUN/07A	Soft Excavation (50,000cu.m.)
18/FEB/08A	Ph. 1 Excavate from 168mPD to +158mPD
29/FEB/08A	Ph. 1 -Bench Formation at +138mPD
07/MAR/08A	Ph. 2 -Bench Formation at +168mPD
11/APR/08	Ph. 1 Excavate from +158mPD to +148mPD
05/MAY/08	Ph. 1 Excavate from +148mPD to +138mPD
04/JUN/08	Ph. 1 Excavate from +138mPD to +131mPD(Fin Lvl)

Cost Centre D - Funicular Tunnel and Adit Tunnel

Construction

D1 - Tunnel Ch.940 - Ch.1240

21/FEB/08A	Assembly,Transfer,Install & Comm Lining formwork
04/MAR/08A	Waterproofing - 100 li.m./wk
18/MAR/08	Tunnel (Lining) - 84 li.m./wk
17/APR/08	Builder's Works - 84 lin.m./wk
22/MAY/08	Trackbed - 200 li.m./wk

D2 - Tunnel Ch. 0 - Ch.940

29/DEC/07A	Excavation CH21 towards CH120 - 7.5m/wk
24/FEB/08A	Excavation CH500 towards CH300 - 48 li.m./wk
28/MAR/08	Excavation CH300 towards CH120 - 48 li.m./wk
26/APR/08	Tunnel Invert CH940-400: 200 li.m./wk
29/APR/08	Tunnel Invert CH21 - CH400: 200 lin.m./wk
03/MAY/08	Tunnel Waterproofing CH21 - 580: 84 li.m./wk
15/MAY/08	Tunnel Waterproofing CH940 - 705: 84 li.m/wk
15/MAY/08	Tunnel Waterproofing CH695 - 580: 50 li.m./wk
17/MAY/08	Tunnel Lining CH21 - 580: 84 li.m/wk
20/MAY/08	Tunnel Builder's Works CH21 - CH580:84 lin.m./wk
24/MAY/08	Tunnel Lining CH695 - 580: 50 li.m./wk
18/JUN/08	Tunnel Lining CH940-695: 84 li.m/wk
26/JUN/08	Tunnel Trackbed CH21 - CH380: 200 lin.m./wk
26/JUN/08	Tunnel Builder's Works CH940-580: 84 li.m/wk

Cost Centr E-Funicular Termini-Summit&Waterfront

Construction

E2 - Hoarding / Tower Crane - Summit Terminus

17/MAR/08	Tower Crane Erection
-----------	----------------------

E2 - Summit Terminus Construction

15/FEB/08A	Foundation Excavation with Haul Road
01/APR/08	+112mPD Slab, Column&Wall upto +115mPD (BOH)
01/APR/08	U/G Drainage & Utilities
09/MAY/08	+116mPD Slab, Column&Wall upto +119mPD
22/MAY/08	+120mPD Slab, Column&Wall upto +123mPD

E1 - North Part of Waterfront Terminus

06/MAR/08A	Install Waling & Strut with Excavation
02/MAY/08	Minipiles Installation
15/MAY/08	BA14 for Pile Loading Test
15/MAY/08	Pile Loading Test
23/MAY/08	Pilecap, Pad Footing w U/G Drainage & Utilities
16/JUN/08	Construct Base Slab @ +8mPD: G.L.B-C & D-J

Cost Centre F- Reservoir at Summit with Pipework

Construction

F2 / F3 / F5 - Pumping Station - Mid-Level

07/APR/08*	Pumping Station Structures & Foundation
05/MAY/08*	Foundation & Baseslab Construction
05/JUN/08	Roof Construction

Cost Centre H-Option Government Entrust Works

Construction

H2 - Nam Long Shan Road

01/NOV/07A	F1.35 to F1.34 (P40) - Steel Deck & Pipe Install
03/MAR/08A	F1.72 to F1.71 (P3)- Backfill & Reinstatement
17/MAR/08	F1.56 to F1.54 (P23)- Excavation
17/MAR/08	F1.43 to 20m (P33)- Pipe Laying
17/MAR/08	F1.41 to F1.40 (P35)- Excavation
17/MAR/08*	F1.37 to F1.35 (P39)- Excavation
17/MAR/08	F1.68 to F1.67 (P8)- Excavation
17/MAR/08	F1.64 to 20m (P13)- Backfill & Reinstatement
17/MAR/08	F1.65 to 6m (P11)- Backfill & Reinstatement
27/MAR/08	F1.71 to F1.70 (P4)- Excavation
28/MAR/08	F1.37 to F1.35 (P39)- Pipe Laying
28/MAR/08	8m to F1.64 (P12) - Pipe Laying+Watermain Works
01/APR/08	F1.37 to F1.35 (P39)- Backfill & Reinstatement
02/APR/08	F1.43 to 20m (P33)- Backfill & Reinstatement
02/APR/08	12m to F1.63 (P14)- Excavation
05/APR/08	F1.34 to F1.33 (P41)- Excavation
12/APR/08	8m to F1.64 (P12) - Backfill & Reinstatement
14/APR/08	F1.34 to F1.33 (P41)- Pipe Laying
16/APR/08	20m to F1.42 (P34)- Excavation
17/APR/08	F1.34 to F1.33 (P41)- Backfill & Reinstatement
21/APR/08	F1.33 to F1.31 (P42)-Excavation
26/APR/08	F1.56 to F1.54 (P23)- Pipe Laying+Watermain Work
26/APR/08	F1.41 to F1.40 (P35)- Pipe Laying
29/APR/08	F1.33 to F1.31 (P42)- Pipe Laying
30/APR/08	F1.68 to F1.67 (P8)- Pipe Laying

				Early Start	Activity Description					
				02/MAY/08	F1.71 to F1.70 (P4)- Pipe Laying					
				03/MAY/08	F1.33 to F1.31 (P42)- Backfill & Reinstatement					
				05/MAY/08	12m to F1.63 (P14)- Pipe Laying+Watermain Works					
				07/MAY/08	F1.31 to F1.30 (P43)- Excavation					
				14/MAY/08	F1.56 to F1.54 (P23)- Backfill & Reinstatement					
				14/MAY/08	F1.41 to F1.40 (P35)- Backfill & Reinstatement					
				16/MAY/08	F1.31 to F1.30 (P43)- Pipe Laying					
				17/MAY/08	F1.71 to F1.70 (P4)- Backfill & Reinstatement					
				19/MAY/08	20m to F1.42 (P34)- Pipe Laying					
				19/MAY/08	F1.68 to F1.67 (P8)- Backfill & Reinstatement					
				19/MAY/08	12m to F1.63 (P14)- Backfill & Reinstatement					
				20/MAY/08	F1.31 to F1.30 (P43)- Backfill & Reinstatement					
				23/MAY/08	F1.30 to F1.28 (P44)- Excavation					
				29/MAY/08	20m to F1.50 (P26)- Backfill & Reinstatement					
				29/MAY/08	F1.57 to F1.56 (P22)- Excavation					
				31/MAY/08	20m to F1.42 (P34)- Backfill & Reinstatement					
				31/MAY/08	F1.70 to 10m (P5)- Excavation					
				31/MAY/08	F1.30 to F1.28 (P44)- Pipe Laying					
				04/JUN/08	F1.30 to F1.28 (P44)- Backfill & Reinstatement					
				04/JUN/08	F1.69 to F1.68 (P7)- Excavation					
				07/JUN/08	F1.28 to F1.27 (P45)- Excavation					
				14/JUN/08	F1.50 to F1.49 (P27)- Excavation					
				14/JUN/08	F1.60 to F1.59 (P19)- Excavation					
				17/JUN/08	F1.28 to F1.27 (P45)- Pipe Laying					
				20/JUN/08	F1.28 to F1.27 (P45)- Backfill & Reinstatement					
				21/JUN/08	F1.23 to F1.21 (P48)- Excavation					
				24/JUN/08	F1.27 to F1.25 (P46)- Excavation					
				30/JUN/08	F1.23 to F1.21 (P48)- Pipe Laying					
				Ocean Park Private Road						
								22/SEP/07A	20m to 1.14 to 12a(P51)- Excavation	
								15/OCT/07A	F1.18 to F1.15 + 20m (P50)- Excavation	
								27/OCT/07A	20m to 1.14 to 12a(P51)- Pipe Laying	
								01/NOV/07A	20m to 1.14 to 12a(P51- Backfill & Reinstatement	
								26/NOV/07A	F1.12a to F1.09 (P52)- Excavation	
								06/DEC/07A	F1.03 to F1.01 (P56)- Excavation	
								27/DEC/07A	F1.09 to F1.07 (P53)- Backfill & Reinstatement	
								05/JAN/08A	F1.05 to F1.03 (P55)- Backfill & Reinstatement	
								09/JAN/08A	F1.03 to F1.01 (P56)- Pipe Laying	
								14/JAN/08A	F1.07 to F1.05 (P54)- Excavation	
								18/JAN/08A	F1.03 to F1.01 (P56)- Backfill & Reinstatement	
								23/JAN/08A	F1.12a to F1.09 (P52)- Pipe Laying	
								30/JAN/08A	F1.12a to F1.09 (P52)- Backfill & Reinstatement	
								22/FEB/08A	F1.07 to F1.05 (P54)- Pipe Laying	
								07/MAR/08A	F1.18 to F1.15 + 20m (P50)- Pipe Laying	
								21/JUN/08	F1.21 to F1.20a (P48a)- Excavation	
								30/JUN/08	F1.21 to F1.20a (P48a)- Pipe Laying	
				Cost Centre J - Entry Plaza Advance Works						
Construction										
H3 - Wong Chuk Hang Road										
				24/DEC/07A	F2.06 to F2.04 (Q3)- Excavation					
				14/FEB/08A	F2.07 to F2.06 (Q2)- Excavation					
				17/MAR/08*	F2.02 to 60m (Q5)- Excavation					
				21/APR/08	F2.02 to 60m (Q5)- Pipe Laying					
				23/APR/08	F2.07 to F2.06 (Q2)- Pipe Laying					
				05/MAY/08	F2.02 to 60m (Q5)- Backfill & Reinstatement					
				09/MAY/08	F2.07 to F2.06 (Q2)- Backfill & Reinstatement					
				26/MAY/08	14m from F2.01+15m (Q8)- Excavation					
				02/JUN/08	F2.06 to F2.04 (Q3)- Pipe Laying					
				18/JUN/08	F2.06 to F2.04 (Q3)- Backfill & Reinstatement					
				26/JUN/08	14m from F2.01+15m (Q8)- Pipe Laying					
Bus Depot (Portion 1)										
				05/MAY/07A	TTA for temp Ocean Park Road					
				23/FEB/08A	Diversion Gas / PCCW & 11Kv					
				03/APR/08	Drainage works for bus terminus					
				03/MAY/08	Irrigation water main					
				10/MAY/08	Street Lighting					
				19/MAY/08	Road works at Bus terminus					
				14/JUN/08	Road furntiure+footpath+buse shelter+planter					
Existing Bus Terminus (Portion 2)										
				21/JAN/08A	Drainage works for the 1800 dia. pipe					
				22/FEB/08A	Dia 150 Salt water main					
				22/FEB/08A	Dia 200 Fresh water main					
				29/MAR/08	Drainage works for the bus terminus					
				31/MAR/08	11kv cable diversion					
				15/APR/08	Diversion of Gas main & PCCW cables					
				07/MAY/08	Irrigation water main					
				14/MAY/08	Landscaping					
				15/MAY/08	Street light					
				21/MAY/08	Road Funiture + footpath + bus shelter + planter					
				22/MAY/08	Road works at the bus terminus					
HK School of Motoring (Portion 3)										
				17/MAR/08	Drainage for permanent road					
				17/MAR/08	Permanent Road and Curing					
				31/MAR/08	Permanent Road and Curing					
				01/APR/08	Sheet Pile&Excav DN450,DN300,DN200,DN1650 & 11kv					
				11/APR/08	Upgrade existing Utility up to carriageway req.					
				17/APR/08	DN450, 300, 200, 1650 & 11kv pipe laying					
				22/APR/08*	Additional Island					
				23/APR/08	Upgrade existing Utility up to carriageway req.					
				29/APR/08	Additional 1650 dm manhole					
				09/MAY/08	DN450, 300, 200, 1650 & 11kv pipe laying					
				20/MAY/08	Drainage for permanent road					
				30/MAY/08	Permanent Road and Curing					
				21/JUN/08	Excavation for Telephone Cable					
Start Date 02/OCT/06 OP3A Dragages - Bouygues JV Sheet 2 of 3										
Finish Date 15/JUN/09				Ocean Park Master Redevelopment Project						
Data Date 17/MAR/08				Contract CI05						
Run Date 28/MAR/08 14:43				Construction Programme Rev 2						
				ENVIRONMENT DEPARTMENT						
				3 Month Rolling Forecast						
© Primavera Systems, Inc.										
				Date	Revision	Checked				
						Approved				

				Early Start	Activity Description
<div></div>	<div></div>	<div></div>	<div></div>	21/JUN/08	Construct Road crossing
				21/JUN/08*	Crawler crane & hammer mobilization
				25/JUN/08	Driving sheet pile 45m, 225nos. 14nos/day ~ 15

**APPENDIX L – CONTACTS OF KEY ENVIRONMENTAL PERSONNEL**

<b>Company</b>	<b>Contact Person</b>	<b>Position</b>	<b>Telephone No.</b>
Ocean Park Corporation	Helen LEUNG	Project Manager	2910 3106
Maunsell Consultants Asia Ltd	Edmund PANG	Project Manager Representative (PMR)	2871 5888
	Terence KONG	Project ETL	2871 5893
Dragages-Bouygues J.V.	YT SO	Project QSE Manager	2555 4110
	Schroeder TAM	Project QSE Officer (Env.)	2555 4113
Mott MacDonald Hong Kong Ltd	Dr. Anne KERR	Independent Environmental Checker	2828 5757
ETS-Testconsult Limited	CL LAU	Environmental. Monitoring Team Supervisor	2695 8318

	<b>Ocean Park Master Redevelopment Project Contract No. CI05 – Site Formation, Funicular Tunnel and Miscellaneous Works</b>	
--	---	--

Contractor's Submission Reference No. <b>Quarterly EM&amp;A Report (October to December 2007) and Monthly EM&amp;A Report (January 2008)</b>						For MCAL Use		
Item No	Review By	Document / Drawing Reference	Reply Code	EPD / PMR's Comments	DBJV's Response	Action	Action Date	Closed Date
1	EPD	Appendix J – Quarterly Report (Oct '07 to Dec '07)		Please provide representative photos of coral species in this Appendix.	As the representative photos are already included in the monthly EM&A report, we have only included a general summary or an extract in the quarterly EM&A report. Please refer to the monthly EM&A report for the detailed representative photos.			
2	EPD	Appendix E – Monthly Report (Jan '08)		a) Please provide a close up shot of the Chinese Lily and indicate in the photo the withered parts if they could be seen in the next report.	The photo indicating the withered parts of Chinese Lily is attached.			
				b) Please indicate the shrunken Balloon Flower in Photo 3.	The photo indicating the shrunken part of Balloon Flower is attached.			
3	EPD	Appendix M – Monthly Report (Jan '08)		It is noted that a page with photos of the Plant Transplantation Monitoring Report in the Monthly EM&A Report – September 2007 is provided after Appendix M. However, the photos on this page could not address the comment in Appendix M.	Based on your comments on the July 07 to September 07 Quarterly EM&A Report, the correct species name has been inserted. The page is the revised version.			

Reply Code: A- Comment must be incorporated into a resubmission. B - Comment to be noted and implemented but does not require resubmission.  
C – PMR preferred solution, to be incorporated if possible. D - For information only. E - New requirement to be incorporated - variation may be required.



	<p align="center"><b>Ocean Park Master Redevelopment Project</b>  <b>Contract No. CI05 – Site Formation, Funicular Tunnel</b>  <b>and Miscellaneous Works</b></p>	
--	---	--



Photo 1 – The withered part of Chinese Lily (red arrow)



Photo 2 - The shrunk Balloon Flower (red arrow)

Reply Code: A- Comment must be incorporated into a resubmission. B - Comment to be noted and implemented but does not require resubmission.  
 C – PMR preferred solution, to be incorporated if possible. D - For information only. E - New requirement to be incorporated - variation may be required.



**Part 3      CS-01 EM&A REPORTS (March 2008)**

## CONTENTS

	Page
EXECUTIVE SUMMARY .....	I
1. INTRODUCTION .....	1
Background .....	1
Project Organisation .....	1
Construction Works undertaken during the Reporting Month .....	1
Summary of EM&A Requirements .....	1
2. ENVIRONMENTAL AUDIT .....	2
Site Inspection .....	2
Implementation Status of Environmental Mitigation Measures .....	2
Implementation Status of Environmental Complaint Handling Procedures .....	3
3. FUTURE KEY ISSUES .....	3
Construction Program for the Next Months .....	3
4. CONCLUSIONS AND RECOMMENDATIONS .....	4
Conclusions .....	4
Recommendations .....	4

### List of Tables

Table 1.1	Actual Quantity of Waste Generated in March 2008 .....	1
Table 2.1	Summary of Environmental Licensing and Permit Status .....	2

### List of Appendices

Appendix A	Project Organization
Appendix B	Layout of Work Site
Appendix C	Construction Programme
Appendix D	Summary of Environmental Mitigation Implementation Schedule

## **EXECUTIVE SUMMARY**

This is the 12<sup>th</sup> EM&A Monthly report prepared by Kaden – ATAL Joint Venture for the Project “Vet Hospital”. This report presents the results of the construction activities conducted in the month.

In the reporting month, the following construction activities took place:

- R.C. structure: construction of dolphin pools.
- Truss installation: material delivery, installation.
- E&M & LSS installation: plumber, electric installation, A/C system, etc.
- Lift installation: alignment revised, installation of electric devices and relevant accessories, etc.
- Internal finishing: plasterer works, installation of wooden doors, waterproof in building and roof.
- Cable laying: excavation, installation of cable and backfill, etc.

## **Environmental Licensing and Permitting**

Permits granted to the Project include the Environmental Permit (EP) for the Project and Construction Noise Permit (CNP). Information of these permits is provided in Table 2.1.

## **Implementation Status of Environmental Mitigation Measures**

Site inspections in the month made following observations and recommendations.

### ***Water Quality Mitigation Measures***

- Debris and gravels were observed stacking at part of u-channel in front of Plant block. The Contractor was reminded to maintain no blockage at the u-channel.
- Catch-pit of temporary drainage was observed blocked by material. The Contractor was reminded to clean up the catch-pit at regular basis.
- Water pipe at temporary drainage is observed broken. The Contractor was reminded to replace the water pipe for the temporary drainage.
- Water hose of fresh water at site haul road was observed broken. The Contractor was reminded to replace the water hose of fresh water.

### ***Air Quality Mitigation Measures***

- No violation was observed nor recorded.

### ***Noise***

- No violation was observed nor recorded.

### ***Ecology***

- No violation was observed nor recorded.

### ***Waste / Chemical Management***

- Rubbish was observed stacking at slope. The Contractor was reminded to clean up the area.

### ***Others***

- No violation was observed nor recorded.

### **Environmental Non-conformance**

No complaint, summons or prosecution related to environmental issues was made against the Vet Hospital Project in the reporting month.

### **Future Key Issues**

Key issues to be considered in the month include:

- General material management to prevent spillage or dust spreading.
- To maintain the temporary drainage system in good condition of flow.
- To prevent stagnant water after rain to prevent mosquito breeding.
- To promote the awareness of protecting the slope. Workers should dispose rubbish to designated area or tubs. Regular remove construction waste that is stacked at designated construction waste area.

## 1. INTRODUCTION

### Background

- 1.1 Under the requirements of Environmental Permit EP-249/2006/A, EM&A programme as set out in the EM&A Manual is required to be implemented.
- 1.2 This report summarises the environmental monitoring and audit works for the Project in the month of March 2008.

### Project Organisation

- 1.3 The structure of the Project Organisation is shown in Appendix A.

### Construction Works undertaken during the Reporting Month

- 1.4 The major construction activities undertaken in the month included:
- R.C. structure: construction of dolphin pools.
  - Truss installation: material delivery, installation.
  - E&M & LSS installation: plumber, electric installation, A/C system, etc.
  - Lift installation: alignment revised, installation of electric devices and relevant accessories, etc.
  - Internal finishing: plasterer works, installation of wooden doors, waterproof in building and roof.
  - Cable laying: excavation, installation of cable and backfill, etc.
- 1.5 A layout plan of the Project is provided in Appendix B.
- 1.6 The actual amounts of different types of waste generated by the activities of the Project in the month are shown in Table 1.1.

**Table 1.1 Actual Quantity of Waste Generated in March 2008**

Waste Type	Examples	Actual quantity disposed (Tonnes)	Disposal Locations
C&D Waste	Construction waste (Plastic, wood and bamboo)	38.74	SENT Landfill
		8.74	TKO Area 137
		38.57	TKO Sorting Facilities
Chemical waste	Used oil, spent solvent	--	Collected by licensed collector
General waste	Mixed rock & soil	79.93	Quarry Bay

### Summary of EM&A Requirements

- 1.7 The environmental licensing and permits are described in Section 2.
- 1.8 The advice on the implementation status of environmental protection and pollution control/mitigation measures is summarized in Section 2 of the Report.
- 1.9 The implementation status of the environmental mitigation is attached in Appendix D.

## 2. ENVIRONMENTAL AUDIT

### Site Inspection

- 2.1 The contract commencement date is 26 March 07.
- 2.2 The weekly site inspection was only carried out on 06<sup>th</sup>, 13<sup>th</sup>, 19<sup>th</sup>, 26<sup>th</sup> (IEC audit) March 2008 in the month.
- 2.3 The purpose is to monitor environmental issues on the construction sites to ensure that all mitigation measures were implemented timely and properly.

### Status of Environmental Licensing and Permitting

- 2.4 All permits/licences obtained as in the reporting month are summarised in Table 2.1.

**Table 2.1 Summary of Environmental Licensing and Permit Status**

Table 2.1 Summary of Environmental Licensing and Permit Status				
Permit No.	Valid Period		Section	Status
	From	To		
Environmental Permit				
EP-249/2006/A	28/07/06	N/A	Expansion of existing Ocean Park and reconstruction / modification of its existing facilities.	Valid
Construction Noise Permits				
GW-RS0695-07	29/10/07	09/04/08	Generator, dump truck, tracked excavator, concrete pump, tower crane, poker, air compressor, concrete lorry mixer.	Valid (Application of extension has been under process)
Chemical Waste Producer				
WPN5213-199-K2880-01	19/03/07	N/A	-	Valid
Air Pollution Control (Construction Dust) Licence				
001018953	16/03/07	N/A	-	Valid
Water Discharge Licence				
EP820/W2/XC041	31/05/07	30/06/12	Vet Hospital	Valid
Billing Account for Disposal of Construction Waste and Application for Issuance of Chits				
7005185	12/4/07	N/A	-	Valid

### Implementation Status of Environmental Mitigation Measures

- 2.5 During site inspections in the month, the following observations and recommendations were made.

#### **Water Quality Mitigation Measures**

- Debris and gravels were observed stacking at part of u-channel in front of Plant block. The Contractor was reminded to maintain no blockage at the u-channel.
- Catch-pit of temporary drainage was observed blocked by material. The Contractor was reminded to clean up the catch-pit at regular basis.
- Water pipe at temporary drainage is observed broken. The Contractor was reminded to replace the water pipe for the temporary drainage.
- Water hose of fresh water at site haul road was observed broken. The Contractor was reminded to replace the water hose of fresh water.

#### **Air Quality Mitigation Measures**

- No violation was observed nor recorded.

**Noise**

- No violation was observed nor recorded.

**Ecology**

- No violation was observed nor recorded.

**Waste / Chemical Management**

- Rubbish was observed stacking at slope. The Contractor was reminded to clean up the area.

**Others**

- No other violation was observed nor recorded.

**Implementation Status of Environmental Complaint Handling Procedures**

**Summary of the Complaints and Prosecutions**

- 2.6 No complaint, summons or prosecution related to environmental issues was received or made against the Project in the reporting month.

**3. FUTURE KEY ISSUES**

- 3.1 Key issues to be considered in the month include:

- General material management to prevent spillage or dust spreading.
- To maintain the temporary drainage system in good condition of flow.
- To prevent stagnant water after rain to prevent mosquito breeding.
- To promote the awareness of protecting the slope. Workers should dispose rubbish to designated area or tubs. Regular remove construction waste that is stacked at designated construction waste area.

**Construction Program for the Next Months**

- 3.2 The construction programme for the next months is shown in Appendix C.

#### **4. CONCLUSIONS AND RECOMMENDATIONS**

##### **Conclusions**

- 4.1 No complaint, summons or prosecution related to environmental issues were made against this project in the reporting month.
- 4.2 IEC audit was carried out on 28 March 2008. 4 observations and no non-compliances were raised.
- 4.3 4 nos. of site inspections were carried out. Parts of identified issues are rectified within the reporting month. Others are under on-going improvement.

##### **Recommendations**

- 4.4 According to the environmental audit performed in the month, the following recommendations are made:

##### ***Air Quality Impact***

- To implement dust suppression measures on dry surfaces and dusty works.

##### ***Noise Impact***

- To inspect the noise sources from inside and outside of the site.
- To space out noisy equipment and position as far away as possible from sensitive receivers.
- To have regular maintenance of vehicles and equipment used.

##### ***Water Quality Impact***

- To ensure open stockpiles of construction materials are covered with tarpaulin or similar fabric during rainstorm.
- To fully operate the temporary on-site drainage system and all sedimentation tank.
- To clean up the mud accumulated in the temporary drainage system and sedimentation tank in frequent basis.


##### ***Waste/Chemical Management***

- To regular waste removal to prevent over accumulation of waste materials or rubbish on site.
- To avoid any discharge of chemical waste or oil directly from the site.
- To regularly and properly collect, store and dispose of all waste types.



# Appendix A

**KADEN - ATAL JOINT VENTURE  
PROJECT ORGANIZATION CHART**

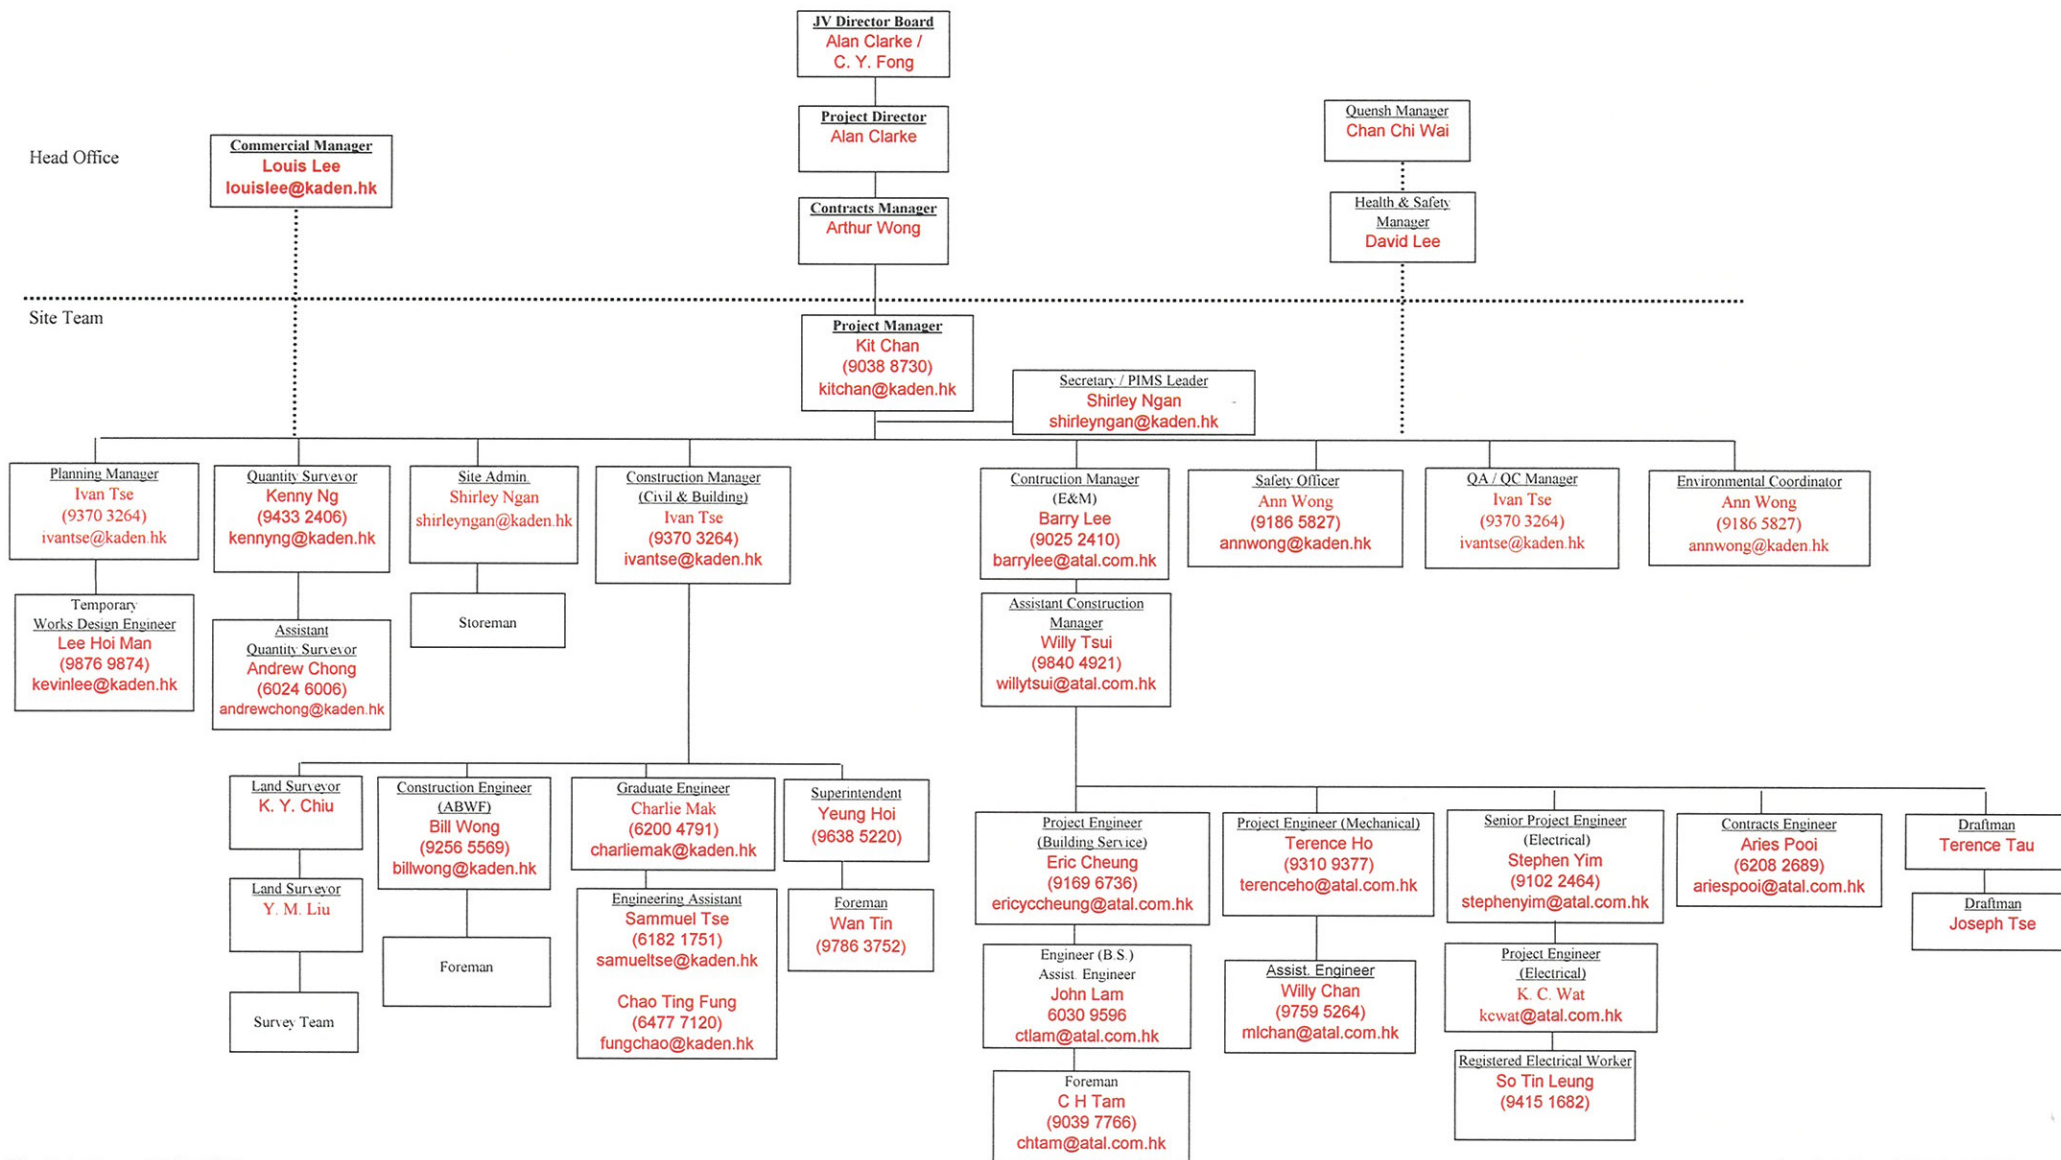

# Appendix B



B.O.O. REF.

A	FIRST ISSUE	ST	03/10
REV.	DESCRIPTION	CHECKED	

The drawing is the Property and Copyright of Queen Park Hong Kong and must not be re-issued, copied or reproduced without written consent



香港海洋公園  
OCEAN PARK HONG KONG

## OCEAN PARK REDEVELOPMENT

CONTRACT NO. CS01  
OCEAN PARK VET HOSPITAL  
SITE LOCATION PLAN

DATE	3-10-2007
CHECKED BY	DC

MAUNSELL CONSULTANTS ASIA LTD.

MAUNSELL | AECOM


**Maunsel Consultants Asia Ltd.**  
茂盛(亞洲)工程顧問有限公司  
In association with:  
ARAS IDAW LEVETT & HALL

**MAIN CONTRACTOR**

**Kaden** 興和


# Appendix C

Activity ID	Orig Dur	Early Start	Early Finish	Total Float	% Comp	2007												2008											
						MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC		
General																													
General																													
VHJCD01	0	26-03-2007A			100	Date of Commencement																							
VHJCD99	0		25-07-2008*	0	0	Date of Completion																							
General																													
VHJKD01	0		20-04-2008*	0	0	Complete all works to the Plant Room Block																							
VHJKD02	0		16-07-2007A	100		Complete the installation of underground service for saltwater, fresh water, uPVC ducting and drainage services beyond the Vet Hospital site																							
VHJKD03	0		31-05-2008*	0	0	Complete all physical works and fulfill the requirements of Clause 24.3(a) of General Conditions necessary to obtain an occupation permit for the Vet Hospital																							
VHJKD04	0		31-05-2008*	0	0	Complete all interiors to the Pool Block and Office Block and allow access to the Employer for the installation of Employer supply fixtures and fittings																							
VHJKD05	0		25-07-2008*	0	0	Achieve Substantial Completion of the Works																							
Preliminaries																													
Preliminaries																													
VHVPSS030	0	31-03-2008*		0	0	Submission of WR1 to HEC for energization																							
VHVPSS040	0	09-04-2008*		0	0	Submit Form WWO46 (Part 4) & WWO132 to WSD																							
VHVPSS050	0	09-05-2008		0	0	Issue Water Certificate by WSD																							
VHVPSS070	0	15-05-2008*		0	0	Submission of Form 501 to FSD																							
VHVPSS071	1	29-05-2008	29-05-2008	0	0	1st Inspection of FS installation by FSD																							
VHVPSS072	15	30-05-2008	13-06-2008	0	0	Rectify defects as per FSD's comment																							
VHVPSS073	1	14-06-2008	14-06-2008	0	0	2nd inspection of FS installation by FSD																							
VHVPSS074	12	15-06-2008	26-06-2008	0	0	Rectify defects as per FSD's comments																							
VHVPSS075	0	11-07-2008		0	0	Issue FS Certificate by FSD																							
VHVPSS080	0	24-05-2008*		0	0	Apply for lift certificate from EMSD																							
VHVPSS090	0		31-05-2008	0	0	Issuance of lift certificate from EMSD																							
VHVPSS100	0	02-06-2008*		0	0	Submit BA13 for Occupation Permit																							
VHVPSS110	1	19-06-2008	19-06-2008	0	0	1st BD inspection																							
VHVPSS120	14	20-06-2008	07-07-2008	0	0	Rectify defects as per BD's comments																							

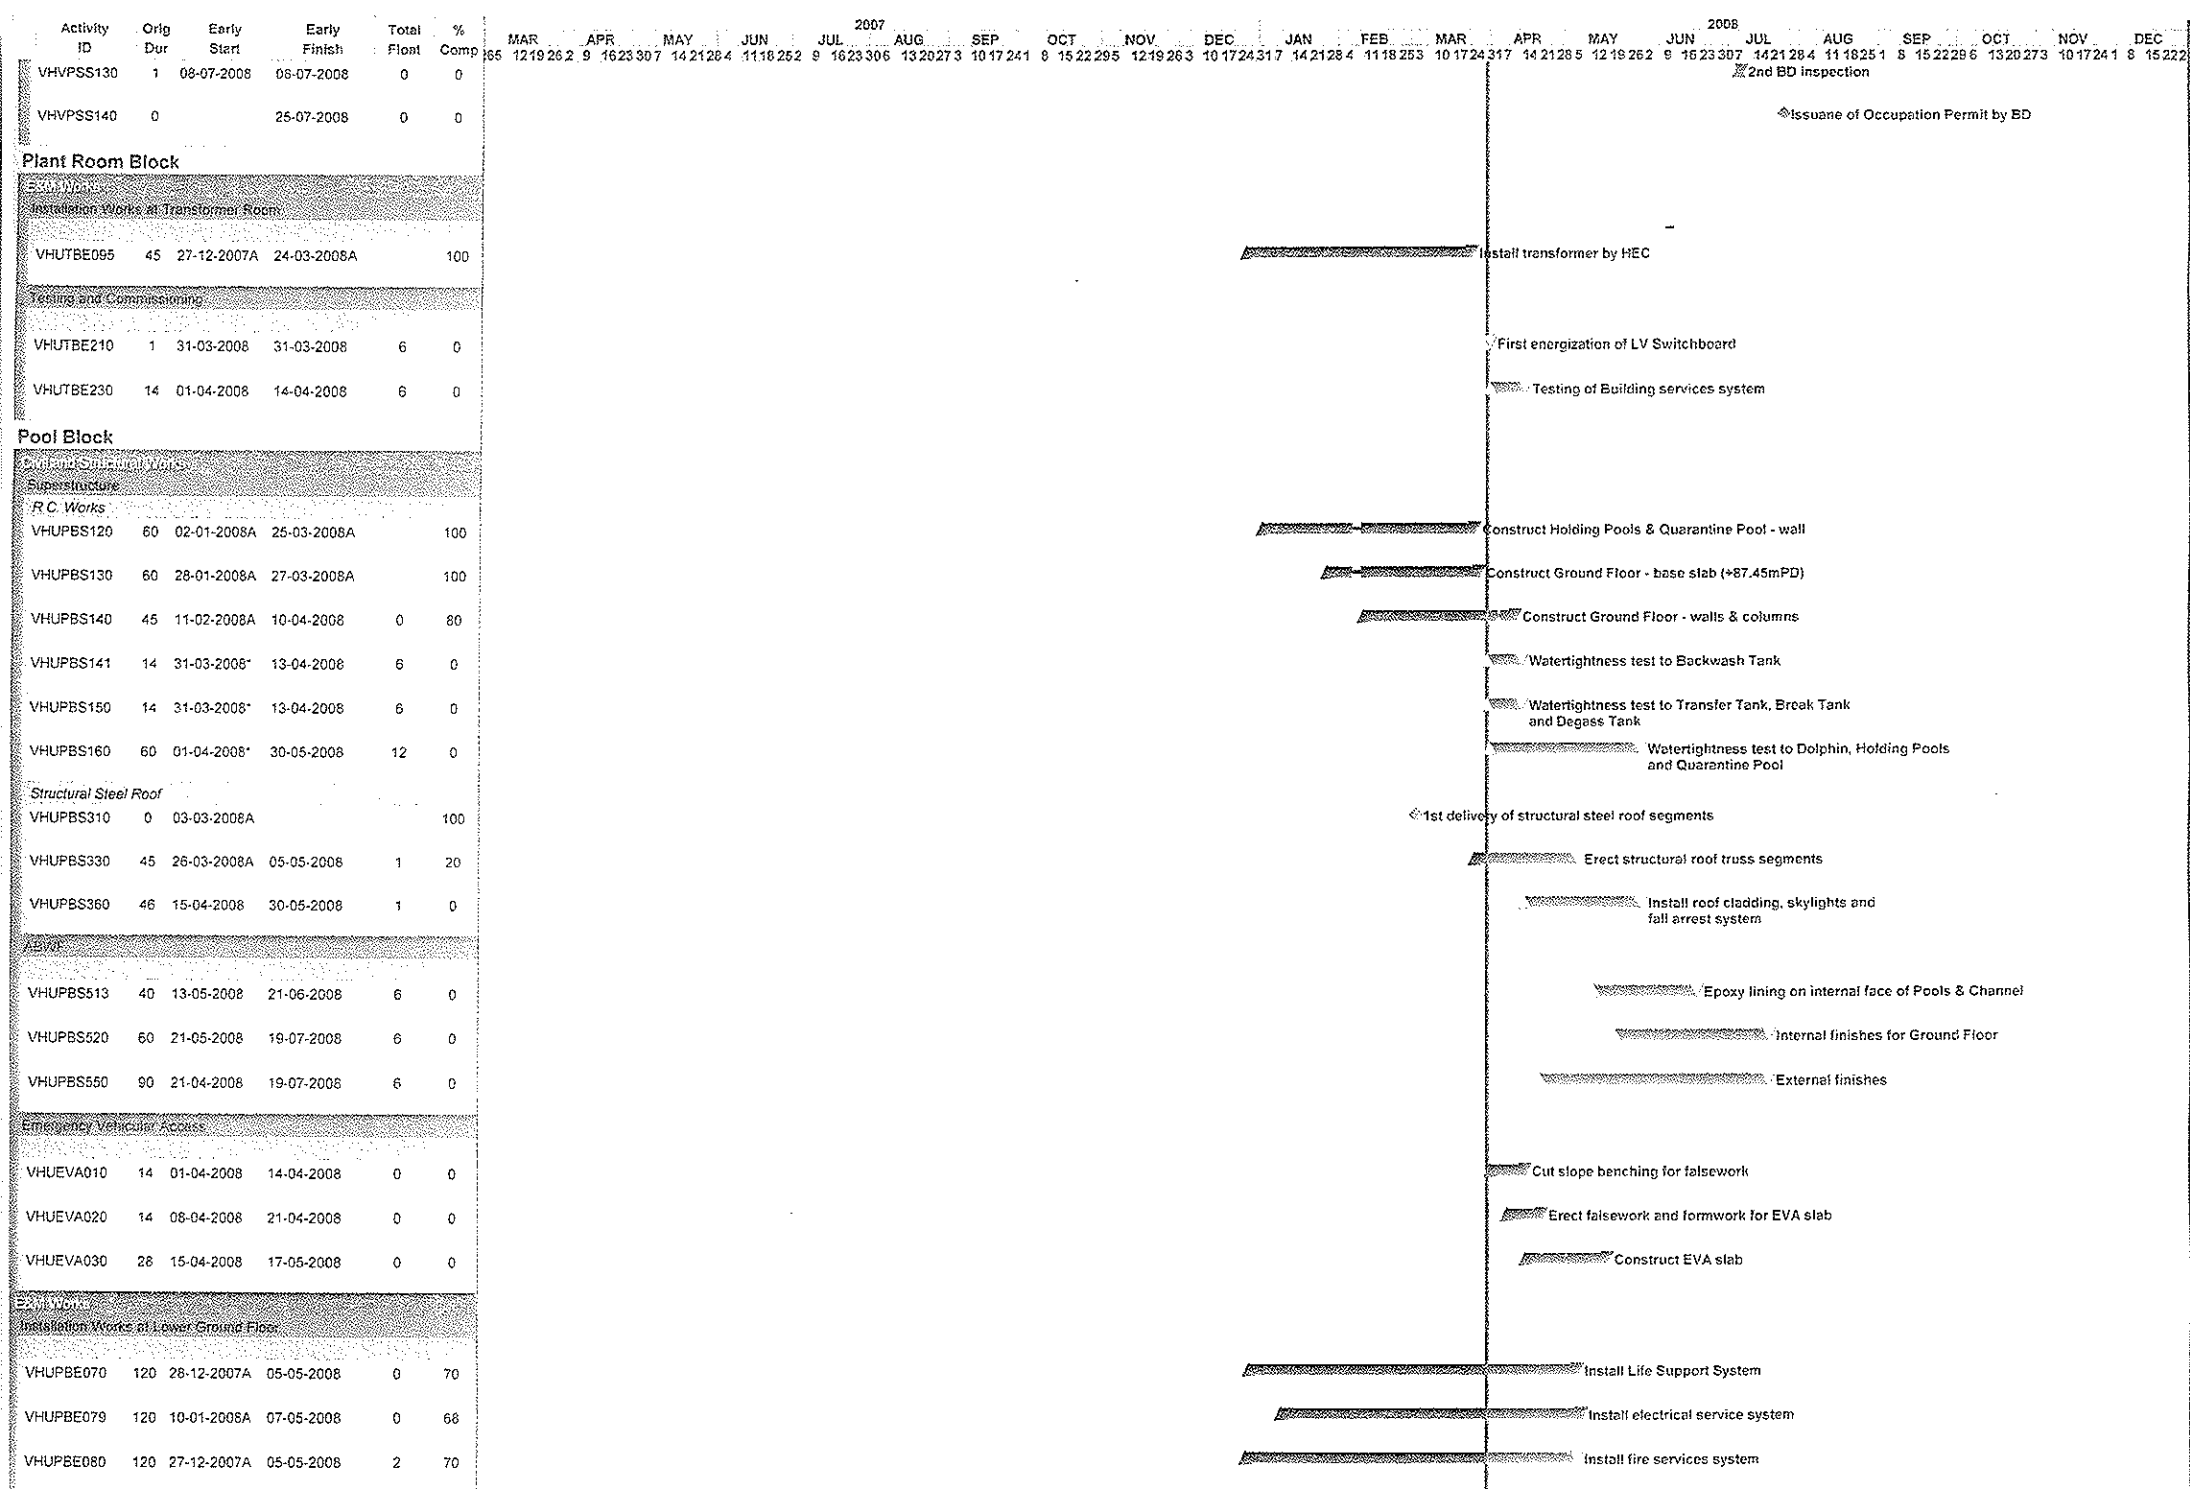





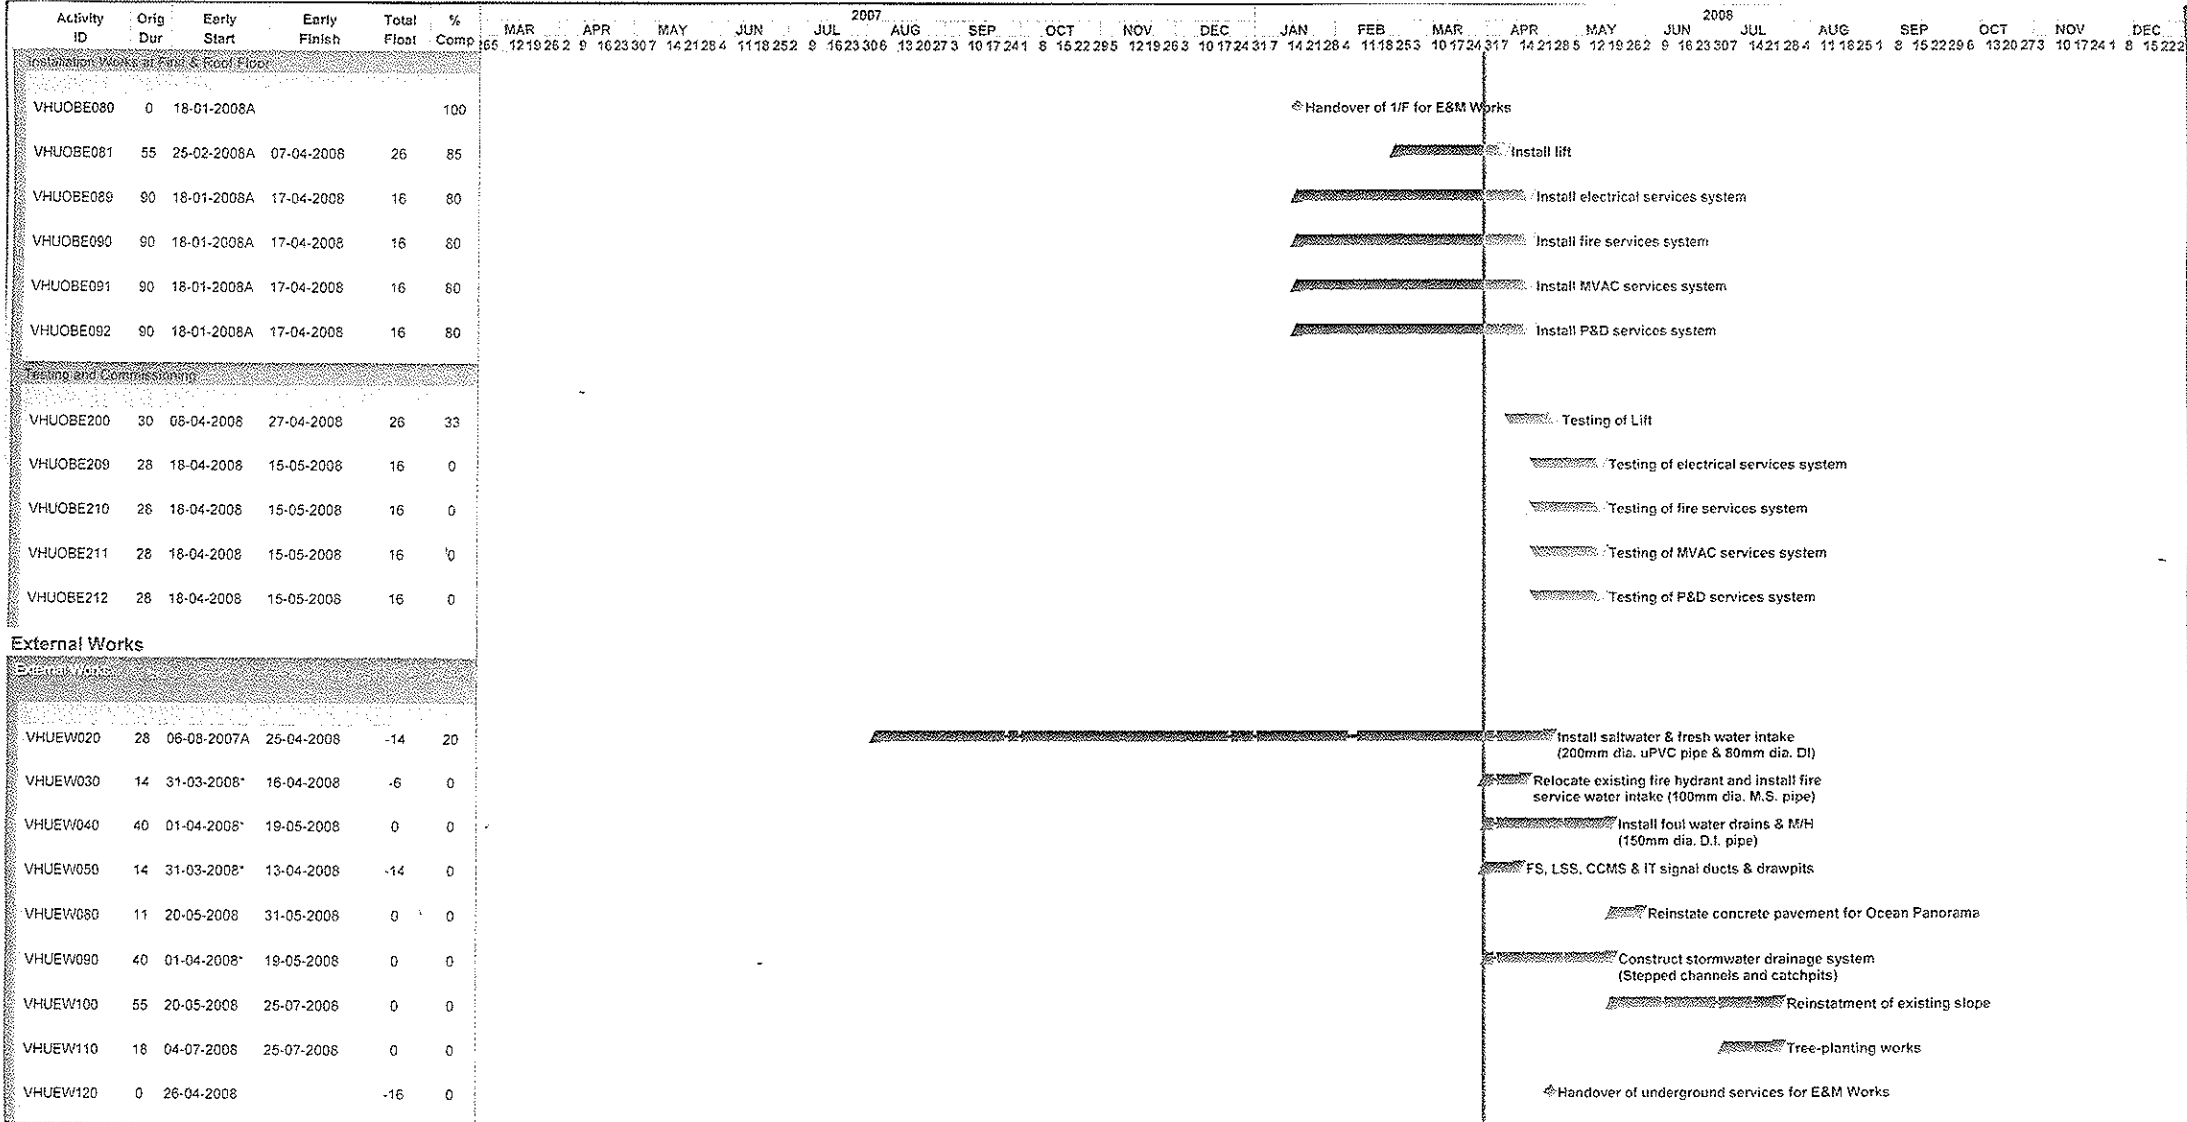

# Appendix D

## Summary of Environmental Mitigation Implementation Schedule

Environmental Protection Measures*	Location / Timing	Implementation Agent	Implementation Stages**			Relevant Legislation & Guidelines
			D	C	O	
<b>Noise Mitigation Measures</b>	Work Site / during construction	Contractor		X		PN 2/93 & EIAO
a) Use of Powered Mechanical Equipment in restricted hours without a valid Construction Noise Permit (CNP) in restricted hours is prohibited, i.e. 7pm and 7am or at any time on general holiday including Sunday						
b) If CNP is grant, construction works shall accord with conditions of CNP						
c) Every air compressor shall be fitted with a noise emission label issued in respect of that air compressor.						
d) Every hand held percussive breaker shall be fitted with a noise emission label issued in respect of that hand held percussive breaker.						
e) Noise barrier should be provided for site which have sufficient space for installation.						
f) Idle equipment should be turned-off or throttled down. Noisy equipment should be properly maintained and used no more often than is necessary.						
g) Noisy equipment and activities should be sited by the Contractor as far from close-proximity sensitive receivers as practical.						
h) Idle equipment should be turned-off or throttled down. Noisy equipment should be properly maintained and used no more often than is necessary.						
i) Construction plant should be properly maintained and operated.						
<b>Air Mitigation Measures</b>	Work Site / during construction	Contractor		X		Air Pollution Control Ordinance,
a) For Breaking, Excavation or earth moving, the working area shall be sprayed with water to maintain the entire surface wet.						Air Pollution Control (Construction Dust) Regulation,
b) Any debris shall be covered or stored in sheltered area and before debris is dumped into a chute, it is to be sprayed with water.						
c) For use of vehicles, load of dusty materials shall be covered entirely						
d) Open burning is prohibited.						
e) A stockpile of dusty materials shall not extend beyond the pedestrian barriers, fencing or traffic cones.						
f) Vehicle washing facilities shall be provided at every exit point.						
g) Main haul road shall be sprayed with water.						

Environmental Protection Measures*	Location / Timing	Implementation Agent	Implementation Stages**			Relevant Legislation & Guidelines
			D	C	O	
<b>Water Mitigation Measures</b>	Work Site / during construction	Contractor		X		ETWB TCW No. 5/2005 and DSD TC No. 2/2004
a) Temporary drainage system (U-channel) and the sedimentation tank should be installed and maintained frequently to prevent adverse impacts on the stream water qualities.						
b) The slope should be covered up to avoid being washed into nearby stream by rain and local runoff.						
c) Any discharges into drainage or sewage systems, inland or coastal waters, or into the ground (e.g. from septic tanks) are required a valid discharge licence, except the discharge of domestic sewage into foul sewers or the discharge of unpolluted water.						
d) The terms and conditions of a discharge licence shall be complied						
e) Manholes should always be adequately covered and temporarily sealed						
<b>Chemical Mitigation Measures</b>	Work Site / during construction	Contractor		X		Waste Disposal (Chemical Waste) (General) Regulation
a) Chemical waste should be packed and stored in suitable containers in the Chemical Waste Store						Code of Practice on the Packaging Labelling and Storage of Chemical Waste
b) There is displayed on every container of chemical waste a label						
c) Chemical waste store shall not be used for any purpose other than the storage of chemical waste						
d) Chemical waste store shall be enclosed on at least 3 sides by a wall, partition fence or a similar device, which shall not be less than the height of the tallest container						
e) Chemical waste store shall not have any connection to any surface water drains or foul sewers						
f) Chemical waste store shall be kept clean and dry						
g) Where the storage area is not within a building, be provided with a roof or a similar covering						
h) Chemical waste store shall has a retention structure with the capacity to accommodate						
i) Every storage area where chemical waste is stored displays a warning panel, notice or marking at or near the entrance or the opening, indicate in bold legible red English words and Chinese characters not less than 6 cm in height on a white background "CHEMICAL WASTE"						
j) Chemical waste stored shall be properly located and easily accessed						

Environmental Protection Measures*	Location / Timing	Implementation Agent	Implementation Stages**			Relevant Legislation & Guidelines
			D	C	O	
k) Chemical should be properly stored in suitable containers						
l) Chemical should be properly stored and sited on sealed areas to prevent leakage						
m) Any opened chemical container shall be placed into a drip tray to prevent chemical leakage						
<b><u>Waste Mitigation Measures</u></b>	Work Site / during construction	Contractor		X		Waste Disposal Ordinance ETWB TCW No. 31/2004
a) The proposals in the waste management plan are able to meet the target of avoidance, minimization, recycling and reuse of C&D material with particular reference to the nature of the Contract						
b) Trip-ticket system shall be properly implemented						
c) Waste disposal points shall be provided and regular collection for disposal to keep the site tidy						
d) Adequate and proper records with respect to waste management shall be kept						
<b><u>Ecological Mitigation Measures</u></b>	Work Site / during construction	Contractor		X		EP-249/2006/A, Clause 2.12, 2.15 & 2.17
a) Trees adjacent to or within the construction site area shall be protected						
b) To conserve the marine ecological resources in the vicinity of this Contract, no marine-based construction works shall be allowed for this Contract.						
c) Site inspection had been carried out before site clearance to ensure no nesting activities of Black Kites at locations of this Contract.						
d) To avoid impacts on coral communities in the marine water of this Contract, temporary drainage system (U-channel) and the sedimentation tank should be installed. In addition, all water mitigation measures will be followed.						

**Part 4      CW-02 EM&A REPORTS (March 2008)**


**W. Hing Construction Co., Ltd**

**Contract No. CW02**

**Ocean Park Redevelopment Project  
- Astounding Asia**

**Monthly EM&A Report  
(Version 1.0)**

March 2008

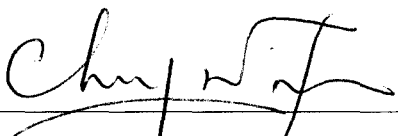Certified By	 (Environmental Team Leader)
--------------	---

**REMARKS:**

The information supplied and contained within this report is, to the best of our knowledge, correct at the time of printing.

CINOTECH accepts no responsibility for changes made to this report by third parties.

**CINOTECH CONSULTANTS LTD**

Room 1710, Technology Park,  
18 On Lai Street,  
Shatin, NT, Hong Kong

Tel: (852) 2151 2083 Fax: (852) 3107 1388

Email: [info@cinotech.com.hk](mailto:info@cinotech.com.hk)

## TABLE OF CONTENTS

	<b>Page</b>
<b>EXECUTIVE SUMMARY.....</b>	<b>1</b>
<b>1. INTRODUCTION.....</b>	<b>3</b>
Background .....	3
Project Organizations .....	4
Construction Programme.....	5
Summary of EM&A Requirements .....	5
<b>2. ENVIRONMENTAL AUDIT.....</b>	<b>6</b>
Environmental Site Audits .....	6
Status of Environmental Licensing and Permitting .....	8
Status of Waste Management .....	8
Implementation Status of Environmental Mitigation Measures .....	8
Summary of Exceedances .....	8
Implementation Status of Event Action Plans.....	9
Summary of Complaints and Prosecutions .....	9
<b>3. FUTURE KEY ISSUES .....</b>	<b>9</b>
Key Issues for the Coming Month .....	9
Construction Program for the Next Month .....	9
<b>4. CONCLUSIONS AND RECOMMENDATIONS .....</b>	<b>9</b>
Conclusions .....	9
Recommendations .....	9

## LIST OF FIGURE

Figure 1.1 Site Layout Plan

## LIST OF APPENDICES

A	Site Audit Summary
B	Summary of Waste Generated
C	Environmental Mitigation Implementation Schedule (EMIS)
D	Event Action Plans
E	Tentative Works Programme



## EXECUTIVE SUMMARY

### Introduction

This is the 8<sup>th</sup> monthly Environmental Monitoring and Audit (EM&A) Report prepared by Cinotech Consultants Limited (Cinotech) for the Contract No. CW02 “Ocean Park Redevelopment Project – Astounding Asia” (hereinafter called “the Project”). The Project was commenced on 1<sup>st</sup> August 2007. This document reports the findings of the environmental auditing works conducted in March 2008.

The major site activities undertaken in the reporting month included:

- Superstructure works, builder’s and finishing work ,E&M work, window and door installation and fitting out works at the New Bird House;
- Superstructure Works (Structural steel works) at the Flight Exercise Aviary;
- Make-good defect works at the Birds Central Kitchen;
- Surface Drainage works at Main Aviary;
- Footing construction works and superstructure works (RC Works) at Astounding Asia Restaurant;
- Pipe piling works for footing F1 ,MVAC Culvert (RC Works) and superstructure works (RC works) at the New Panda Habitat;
- External drainage, services pipelines and ducting works.

### Environmental Monitoring and Audit Works

Environmental monitoring and audit works for the Project was performed as stipulated in the updated EM&A Manual. Site audits were conducted once per week. Environmental site audits were conducted on 4<sup>th</sup>, 11<sup>th</sup>, 18<sup>th</sup> and 28<sup>th</sup> March 2008. No non-compliance was observed during the site audits.

The implementation of the environmental mitigation measures, Event Action Plans and environmental complaint handling procedures were also checked.

No notification of exceedance was received from the Project Environmental Team Leader (ETL) in the reporting month. Summary of the events and action taken in the reporting month is tabulated in **Table I**.

**Table I Summary Table for Events Recorded in the Reporting Month**

Parameter	No. of Events		No. of Events Due to the Project	Action Taken
	Action Level	Limit Level		
1-hr TSP	0	0	0	N/A
24-hr TSP	0	0	0	N/A
Noise	0	0	0	N/A

**Environmental Licenses and Permits**

Licenses/Permits granted to the Project include the Environmental Permit (EP) for the Redevelopment Project, Registration of Waste Producer, Water Discharge License and one Construction Noise Permit (CNP). One new CNP was issued to the Project by EPD in the reporting month.

A notification pursuant to Section 3(1) of the Air Pollution Control (Construction Dust) Regulation was received prior the commencement of the Project.

**Complaints and Prosecutions**

No environmental complaint and prosecution was received in the reporting month.

**Future Key Issues**

Key issues to be considered in the coming month include:

- Builder's & finishing works, E&M works, windows and doors installation and fitting out works at New Bird House;
- E&M and fitting out works and paving works at the Flight Exercise Aviary;
- Underground drainage works at Main Aviary;
- Superstructure work (RC Works), underground drainage works, Builder's finishing works, E&M Works and fitting out works at Astounding Asia Restaurant;
- Pile Piling ,ELS works for footing F1 & R.C works for footing, RC works on MVAC culvert, RC works on superstructure works and underground drainage works at New Panda Habitat;
- Tree transplantation at New Bird Theatre;
- External services pipeline and ducting works; and
- External drainage works.

## 1. INTRODUCTION

### Background

- 1.1 The “Repositioning and Long Term Operation Plan of Ocean Park” has been implementing by the Ocean Park Corporation at its existing site of Ocean Park and Nam Long Shan, Aberdeen. The purpose of this project is to upgrade and expand the existing Ocean Park to meet anticipated visitor demands and to position Ocean Park as a premium tourist attraction and a regional leader in themed recreational and educational park experience. The site layout plan is illustrated in Figure 1.1.
- 1.2 An environmental impact assessment (EIA) report for “Repositioning and Long Term Operation Plan of Ocean Park” (Report No. 121/2006 and Register No. AEIAR-101/2006) has been prepared in 2006 and the Environmental Monitoring and Audit Manual (Project’s EM&A Manual) was also included as part of the EIA report in the register. An Environmental Permit (EP) No. EP-249/2006 was issued on 28 July 2006 for the above project to Ocean Park Corporation as Permit Holder and a varied EP No. EP-249/2006/A was subsequently issued on 23 October 2006 for the above project to Ocean Park Corporation as Permit Holder.
- 1.3 W. Hing Construction Co., Ltd. (the Contractor) was commissioned by the Employer to undertake the design and construction of the Contract No. CW02 “Ocean Park Redevelopment Project – Astounding Asia” (hereinafter call “the Project”).
- 1.4 The Project includes design and construction of:
  - (a) ETFE roof membrane system including the membrane, mullion, supporting frame, fixing to main structure, openings and all associated elements
  - (b) Aviary netting including mesh and supporting wire and fixing to main structures
  - (c) Artificial Rockwork including concrete foundations, internal structural supporting systems and fixing details
  - (d) All GRC works
  - (e) Skylight at back of house of Panda Habitat
  - (f) Nest box of Red Panda
  - (g) E&M supporting structures
  - (h) Balustrade
  - (i) Mural
  - (j) Exhibit glazing at the alligator, panda mountain viewing shelter, otter viewing, and goldfish exhibit
  - (k) Bamboo Rail including foundation
  - (l) Bamboo and Reed Barriers including foundation
  - (m) Planter Wall
  - (n) Fog system within Panda Habitat
  - (o) Glass Guard Rails
  - (p) Snow Production System
  - (q) Chilled rock system
  - (r) Fire Services
  - (s) “Rock Delta” Stone Wool Intensive Medium for the rice paddy wall
  - (t) Woven willow cladding for fence wall/gate
  - (u) Foundation for shelter support pole for panda mountain viewing shelter

(v) Kid's climbing tree & giant panda climbing structure

1.5 Cinotech Consultants Ltd. (Cinotech) was commissioned by the Contractor to undertake the Environmental Team (ET) services for the Project. This is the 8<sup>th</sup> monthly EM&A Report summarizing the EM&A works for the Project in March 2008.

### **Project Organizations**

1.6 Different parties with different levels of involvement in the project organization include:

- The Engineer and Project Environmental Team Leader (ETL) – Maunsell Consultants Asia Ltd.
- Contractor – W. Hing Construction Co. Ltd.
- Contractor Environmental Team (CET) – Cinotech Consultants Ltd.
- Independent Environmental Checker (IEC) – Mott MacDonald HK Ltd.

1.7 The responsibilities of respective parties are provided in Section the Contractor's EM&A Manual of the Project.

1.8 The key contacts of the Project are shown in **Table 1.1**.

**Table 1.1 Key Project Contacts**

<b>Party</b>	<b>Name</b>	<b>Role</b>	<b>Phone No.</b>	<b>Fax No.</b>
Project ET	Mr. Terence Kong	Project ET Leader (ETL)	2871 5893	2552 1256
Contractor	Mr. Billy Lee	Project Manager	6193 4096	8343 9188
	Mr. Eddie Chiu	Environmental & Safety Manager	6105 4075	
Contractor's ET	Dr. Priscilla Choy	Contractor's Environmental Team Leader (CETL)	2151 2089	3107 1388
	Mr. Ian Ip	ET Coordinator & Audit Team Leader	2151 2095	
	Mr. Henry Leung	Monitoring Team Leader	9779 7340	
IEC	Miss Florence Yuen	Independent Environmental Checker (IEC) Representative	2828 5757	28271823

## **Construction Programme**

1.9 The site activities undertaken in the reporting month were:

- Superstructure works, builder's and finishing work ,E&M work, window and door installation and fitting out works at the New Bird House;
- Superstructure Works (Structural steel works) at the Flight Exercise Aviary;
- Make-good defect works at the Birds Central Kitchen;
- Surface Drainage works at Main Aviary;
- Footing construction works and superstructure works (RC Works) at Astounding Asia Restaurant;
- Pipe piling works for footing F1 ,MVAC Culvert (RC Works) and superstructure works (RC works) at the New Panda Habitat;
- External drainage, services pipelines and ducting works.

## **Summary of EM&A Requirements**

1.10 The EM&A programme requires construction phase environmental site audit. The duties and responsibilities comprise the following:

- monitor various environmental parameters, if necessary, as specified in the Contractor's EM&A Manual;
- analyze the environmental monitoring and audit data;
- review the EM&A programme to confirm the adequacy of mitigation measures implemented and the validity of the EIA predictions and to identify and adverse environmental impacts arising;
- carry out site inspection to investigate and audit the Contractor's site practice, equipment and work methodologies with respect to pollution control and environmental mitigation, and effect proactive action to pre-empt problems;
- audit and prepare EM&A reports on the site environmental conditions;
- report the environmental audit results to the Contractor;
- recommend appropriate mitigation measures to the Contractor in case of exceedance of Action and Limit Levels in accordance with the Event and Action Plans; and
- adhere to the procedures for carrying out complaint investigation in accordance with Sections 7.11 to 7.14 of the Contractor's EM&A Manual.

1.11 This report presents the environmental monitoring and audit works for the Project in March 2008.

## 2. ENVIRONMENTAL AUDIT

### Environmental Site Audits

- 2.1 Environmental site audits were carried out on weekly basis to monitor the timely implementation of proper environmental management practices and mitigation measures in the Project site.
- 2.2 Site audits for the Project in the reporting month were conducted on 4<sup>th</sup>, 11<sup>th</sup>, 18<sup>th</sup> and 28<sup>th</sup> March 2008. No non-compliance was observed during the site audits. The summaries of site audits are attached in **Appendix A**.
- 2.3 During site inspections in the reporting month, no non-conformance was identified. The observations and recommendations are summarized in **Table 2.1**.

**Table 2.1 Observations and Recommendations of Site Audits**

Parameters	Date	Observations / Recommendations	Remediation/ Follow up
Water Quality	04/03/08	Stagnant water was observed at the New Panda Habitat. Contractor was advised to keep the drainage system operating and maintain the operation of the sedimentation tank.	This item was rectified at 18/03/08
	04/03/08	Stockpile at the New Panda Habitat under the tree was still not covered. Contractor was reminded to cover them.	This item was rectified at 11/03/08
	04/03/08	Stockpile next to generator room was accumulated, contractor was advised to bund the stockpiles to avoid slit water go out to the site boundary.	This item was rectified at 11/03/08
	11/03/08	Stockpiles were still accumulated near the main aviary. Contractor was reminded to remove them as soon as possible.	This item is still outstanding so follow up is needed at the next audit session
	11/03/08	Contractor had kept the drainage system operation, but contractor was reminded to keep a good maintenance of the sedimentation tank and maintain good operation of the tank and the duct.	This item was rectified at 18/03/08
	18/03/08	Stockpile accumulated at the side of AA restaurant. Contractor was reminded to cover them with tarpaulin or other measure and it was also reminded to water the stockpile to reduce dust generation.	This item is still outstanding so follow up is needed at the next audit session
	28/03/08	Stockpile accumulated at the side of AA restaurant was still not clear. Contractor was reminded to cover them well.	This item is still outstanding so follow up is needed at the next audit session
	28/03/08	Leaves were accumulated at the U- channel at the New Panda habitat. Contractor was reminded to clean them up.	This item is still outstanding so follow up is needed at the next audit session

Air Quality	04/03/08	Stockpiles were accumulated near Main Aviary. Contractor was reminded to compact them and cover them to suppress dust generation	This item was rectified at 11/03/08
	04/03/08	The access road was observed to be dry. The Contractor was reminded to water the road frequently to reduce the dust generation.	This item was rectified at 11/03/08
	18/03/08	Main access is dry. Contractor was reminded to water the main road.	This item was rectified at 28/03/08
	18/03/08	Contractor was reminded to cover the drilling rig with tarpaulin during the operation.	This item was rectified at 28/03/08
	28/03/08	Stockpile was accumulated next to New Panda Habitat. Contractor was reminded to cover them.	This item is still outstanding so follow up is needed at the next audit session
Waste/ Chemical Management	04/03/08	General refuses were accumulated at the road near New Panda Habitat and the road of the Flight Exercise Aviary. Contractor was reminded to clean them regularly.	This item was rectified at 11/03/08
	28/03/08	Oil drums were found at the Flight Exercise Aviary. Contractor was reminded to remove them and provide with drip trays.	This item is still outstanding so follow up is needed at the next audit session

**Status of Environmental Licensing and Permitting**

- 2.4 All valid permits/licenses obtained for the Project are summarized in **Table 2.2**. Total of One new CNP was issued to the Project in the reporting month.

**Table 2.2 Summary of Environmental Licensing and Permit Status**

Permit No.	Valid Period		Details	Status
	From	To		
Environmental Permit				
EP-249/2006/A	23/10/2006	N/A	Expansion of the existing Ocean Park and reconstruction / modification of its existing facilities.	Valid
Registration of Chemical Waste Producer				
WPN2513-199-W2894-18	20/08/2007	N/A	Waste Disposal (Chemical Waste) (General) Regulation -- Registration of Waste Producer	Valid
Construction Noise Permit				
GW-RS0488-07	01/09/2007	01/03/2008	Construction Noise Permit for Ocean Park, Wong Chuk Hang, Hong Kong	Expired
GW-RS0123-08	10/03/2008	01/09/2008	Construction Noise Permit for Ocean Park, Wong Chuk Hang, Hong Kong	Valid
Water Discharge License				
EP820/W9/XW240	12/10/2007	31/10/2012	Discharge of industrial trade effluent arising from the Sedimentation tank at the construction site (CW02 Astounding Asia, Ocean Park Redevelopment Project) to communal storm water drain.	Valid
Others				
001022180	N/A	N/A	Notification Pursuant to Section 3(1) of the Air Pollution Control (Construction Dust) Regulation	Valid
7005864	N/A	N/A	Construction Waste Disposal Billing Account with EPD	Valid

**Status of Waste Management**

- 2.5 The amount of waste generated by the construction activities of the Project in the reporting month is attached in **Appendix B**.

**Implementation Status of Environmental Mitigation Measures**

- 2.6 According to the Environmental Permit and the Contractor's EM&A Manual, the mitigation measures detailed in the documents are required to be implemented. An updated summary of the EMIS is provided in **Appendix C**.

**Summary of Exceedances**

- 2.7 No Action/Limit Level exceedance was reported in the reporting month.



**Implementation Status of Event Action Plans**

- 2.8 The Event Action Plans for air quality and construction noise are presented in **Appendix D**.

**Summary of Complaints and Prosecutions**

- 2.9 No environmental complaint and prosecution related to the Project works was received during the reporting month.

**3. FUTURE KEY ISSUES****Key Issues for the Coming Month**

- 3.1 Key issues to be considered in the coming month include:
- Dust generation from excavation, slopes, stockpiles and underground drainage works;
  - Noise generated from operation equipment and machinery on-site;
  - Storage of chemicals/fuel and chemical waste/waste oil on site;
  - Sorting of C&D materials at source;
  - Ensure proper collection and disposal of rubbish generated on site; and
  - Larviciding against mosquito breeding in stagnant water should be carried out at least on a weekly basis;
  - Ensure the operation of sedimentation tank in collecting the rainstorm.

**Construction Program for the Next Month**

- 3.2 The tentative construction program for the Project is provided in **Appendix E**.

**4. CONCLUSIONS AND RECOMMENDATIONS****Conclusions**

- 4.1 Four environmental site audits were performed in March 2008. No non-compliance was observed during the site audits.
- 4.2 No exceedance of environmental monitoring was reported in the reporting month.
- 4.3 No environmental complaint and prosecution related to the project was received in the reporting month.

**Recommendations**

- 4.4 According to the environmental audits performed in the reporting month, the following recommendations are recommended:

*Dust Impact*

- To ensure water spray is applied for the dust emissive works, such as breaking, loading and unloading of soil materials
- To implement dust suppression measures on haul road, stockpiles and dry surfaces.

*Noise Impact*

- To space out noisy equipment and position as far away as possible from sensitive receivers.
- To review the works sequence of site activities so as to reduce the number of noisy equipment in concurrent operation.
- To provide temporary noise barriers for noisy activities, such as breaking works and drilling works.
- To employ quiet powered mechanical equipment if possible.
- To ensure compliance of CNP conditions during restricted-hour works.

*Water Quality Impact*

- To identify any wastewater discharges from site.
- To regularly maintain the condition of u-channel, catch pits and wheel washing facilities on site.
- To regularly maintain the sediment control measures after rainstorms.
- To avoid water from accumulation on site and carry out larviciding against mosquito breeding for stagnant water when mosquito larvae are observed.

*Waste/Chemical Management*

- To check for any accumulation of waste materials or refuse on site.
- To avoid any discharge of oil directly from the site.
- To avoid improper handling or storage of oil drum on site.


---

---

**FIGURE**

---

---

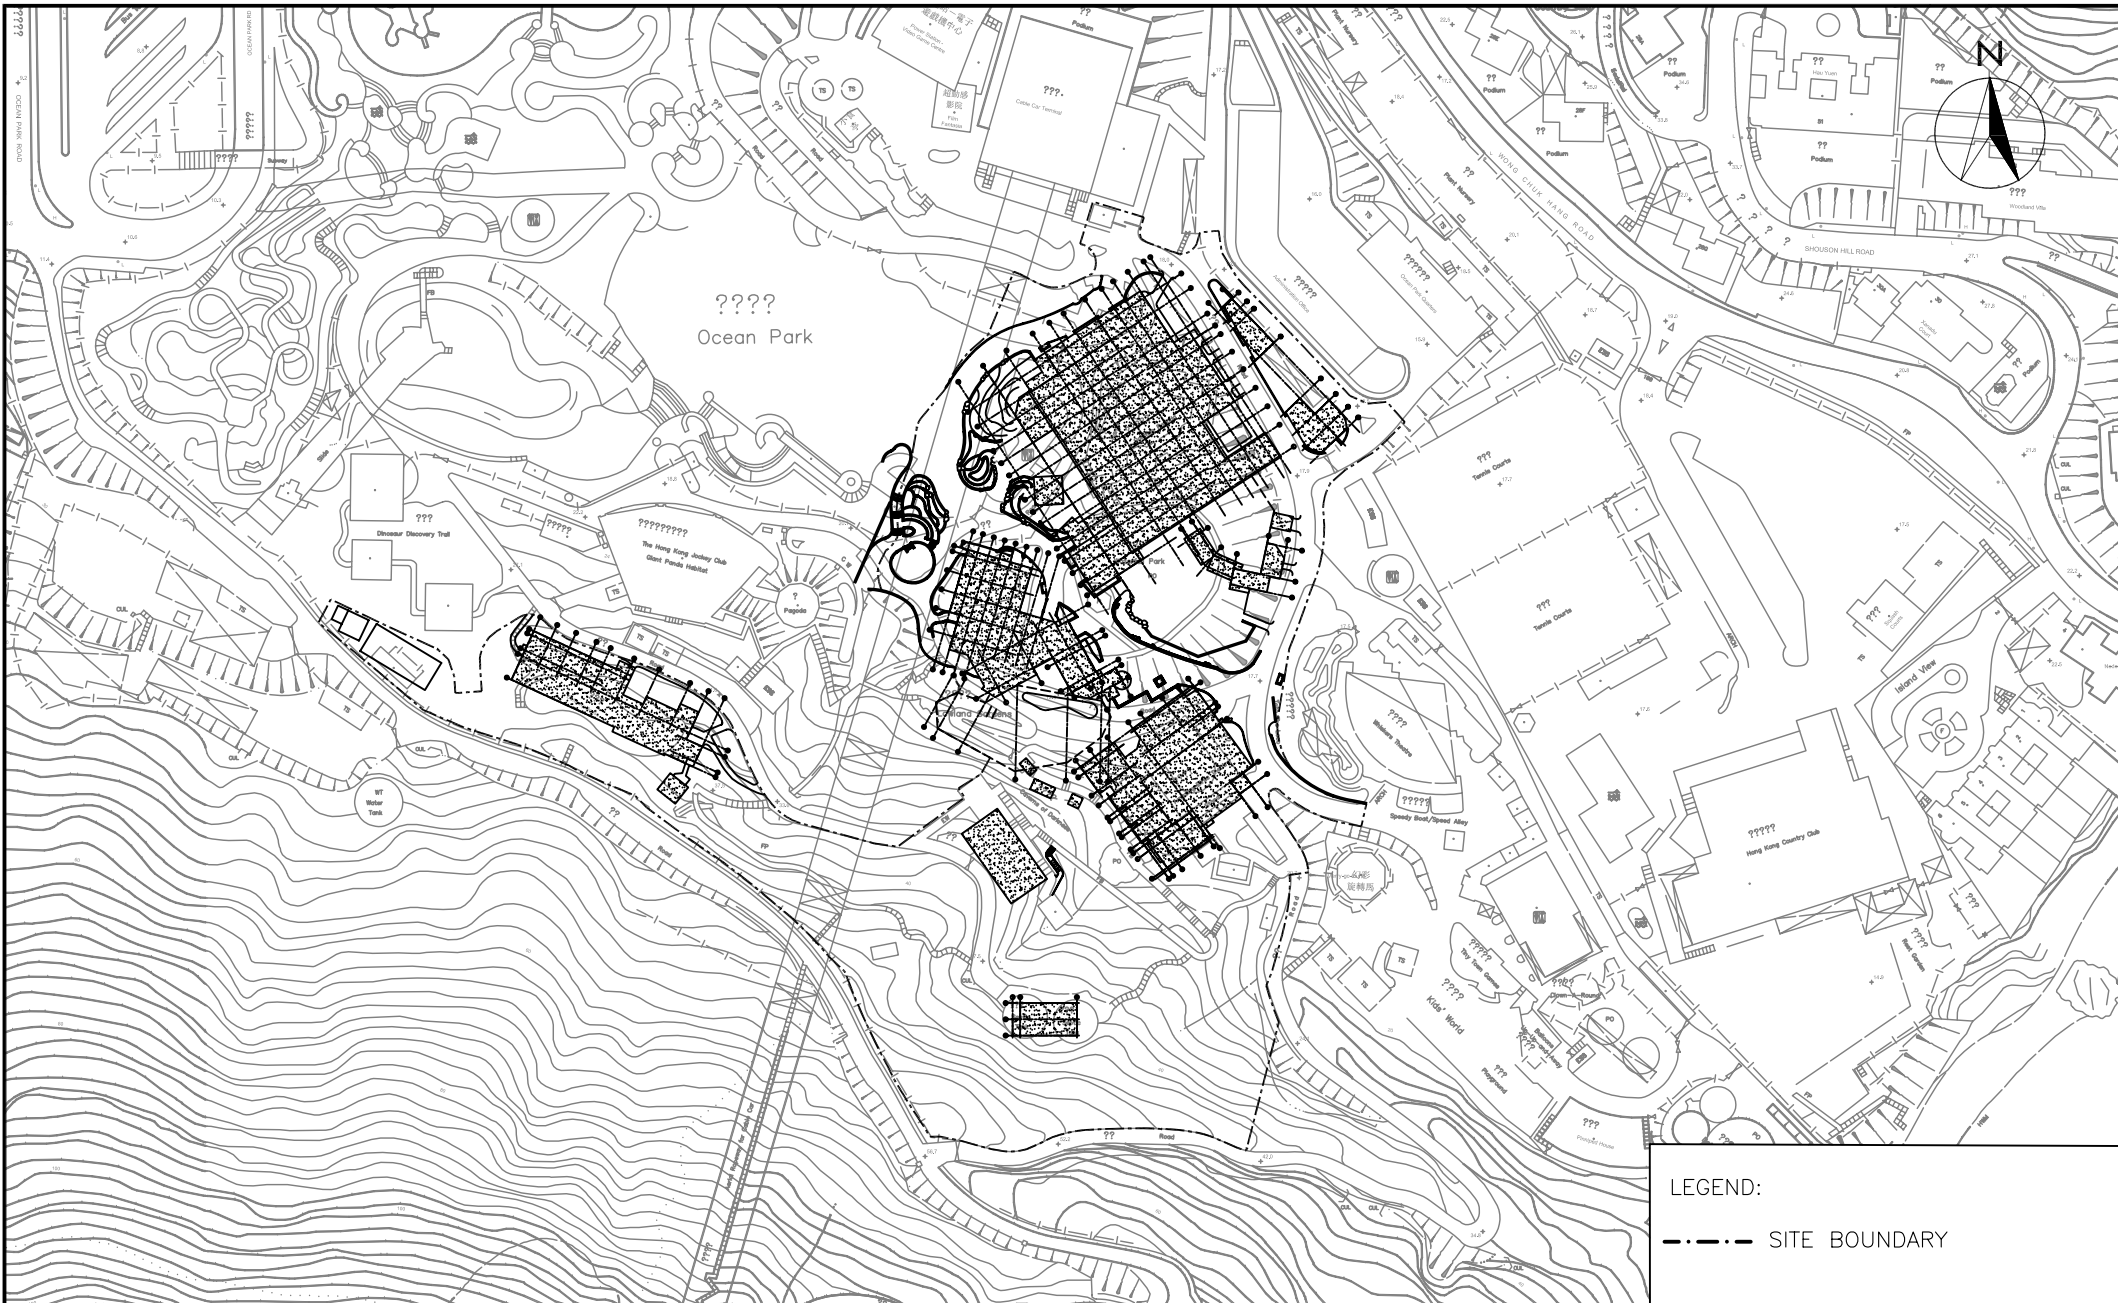

**CINOTECH**  
Cinotech Consultants Limited

CONTRACT NO. CW02  
OCEAN PARK REDEVELOPMENT PROJECT – ASTOUNDING ASIA

**SITE LAYOUT PLAN**

SCALE	A4 1:2000	DATE	AUG 2007
CHECK	EW	DRAWN	TL
JOB No.	MA7025	DRAWING No.	1.1
		REV	—

---

---

**APPENDIX A**  
**SITE AUDIT SUMMARY**

---



---

**Ocean Park Master Redevelopment Project****Contract No. CW02 – Astounding Asia****Weekly Site Inspection Record Summary****Inspection Information**

Checklist Reference Number	80304
Date	4 March 2008 (Tuesday)
Time	9:30 – 10:30

Ref. No.	Non-Compliance	Related Item No.
-	None identified	-

Ref. No.	Remarks/Observations	Related Item No.
80304 – 02	<b>A. Water Quality</b> <ul style="list-style-type: none"><li>Stagnant water was observed at the New Panda Habitat. Contractor was advised to keep the drainage system operating and maintain the operation of the sedimentation tank.</li></ul>	2.18
80304 – 03	<ul style="list-style-type: none"><li>Stockpile at the New Panda Habitat under the tree was still not covered. Contractor was reminded to cover them.</li></ul>	2.8
80304 – 04	<ul style="list-style-type: none"><li>Stockpile next to generator room was accumulated, contractor was advised to bund the stockpiles to avoid slit water go out to the site boundary.</li></ul>	2.8
80304 – 05	<b>B. Air Quality</b> <ul style="list-style-type: none"><li>Stockpiles were accumulated near Main Aviary. Contractor was reminded to compact them and cover them to suppress dust generation.</li></ul>	3.3
80304 – 06	<ul style="list-style-type: none"><li>The access road was observed to be dry. The Contractor was reminded to water the road frequently to reduce the dust generation.</li></ul>	3.5
	<b>C. Noise</b> <ul style="list-style-type: none"><li>No environmental deficiency was identified during the site inspection.</li></ul>	
80304 – 01	<b>D. Waste / Chemical Management</b> <ul style="list-style-type: none"><li>General refuses were accumulated at he road near New Panda Habitat and the road of the Flight Exercise Aviary. Contractor was reminded to clean them regularly.</li></ul> <b>E. Permit / Licenses</b> <ul style="list-style-type: none"><li>No environmental deficiency was identified during the site inspection.</li></ul> <b>F. Others</b> <ul style="list-style-type: none"><li>Follow-up on previous audit (Ref. No.:80226). Follow up action is needed for item 80226-01.</li></ul>	5.1.3



	Name	Signature	Date
Recorded by	Ian Ip		4 March 2008
Checked by	Dr. Priscilla Choy		4 March 2008

**Ocean Park Master Redevelopment Project****Contract No. CW02 – Astounding Asia****Weekly Site Inspection Record Summary****Inspection Information**

Checklist Reference Number	80311
Date	11 March 2008 (Tuesday)
Time	10:10 – 11:10

Ref. No.	Non-Compliance	Related Item No.
-	None identified	-

Ref. No.	Remarks/Observations	Related Item No.
80311 – 01	<b>A. Water Quality</b> <ul style="list-style-type: none"><li>Stockpiles were still accumulated near the main aviary. Contractor was reminded to remove them as soon as possible.</li></ul>	2.8
80311 – 02	<ul style="list-style-type: none"><li>Contractor had kept the drainage system operation, but contractor was reminded to keep a good maintenance of the sedimentation tank and maintain good operation of the tank and the duct.</li></ul> <b>B. Air Quality</b> <ul style="list-style-type: none"><li>No environmental deficiency was identified during the site inspection.</li></ul> <b>C. Noise</b> <ul style="list-style-type: none"><li>No environmental deficiency was identified during the site inspection.</li></ul> <b>D. Waste / Chemical Management</b> <ul style="list-style-type: none"><li>No environmental deficiency was identified during the site inspection.</li></ul> <b>E. Permit / Licenses</b> <ul style="list-style-type: none"><li>No environmental deficiency was identified during the site inspection.</li></ul> <b>F. Others</b> <ul style="list-style-type: none"><li>Follow-up on previous audit (Ref. No.:80304). All the items have been rectified except 80304-02 and 80304-05. Follow up action is needed for the outstanding items.</li></ul>	2.18



	Name	Signature	Date
Recorded by	Ian Ip		12 March 2008
Checked by	Dr. Priscilla Choy		12 March 2008

**Ocean Park Master Redevelopment Project****Contract No. CW02 – Astounding Asia****Weekly Site Inspection Record Summary****Inspection Information**

Checklist Reference Number	80318
Date	18 March 2008 (Tuesday)
Time	14:00 – 15:00

Ref. No.	Non-Compliance	Related Item No.
-	None identified	-

Ref. No.	Remarks/Observations	Related Item No.
80318 – 01	<b>A. Water Quality</b> <ul style="list-style-type: none"><li>• Stockpile accumulated at the side of AA restaurant. Contractor was reminded to cover them with tarpaulin or other measure and it was also reminded to water the stockpile to reduce dust generation.</li></ul>	2.8
80318 – 02	<b>B. Air Quality</b> <ul style="list-style-type: none"><li>• Main access is dry. Contractor was reminded to water the main road.</li></ul>	3.5
80318 – 03	<ul style="list-style-type: none"><li>• Contractor was reminded to cover the drilling rig with tarpaulin during the operation.</li></ul> <b>C. Noise</b> <ul style="list-style-type: none"><li>• No environmental deficiency was identified during the site inspection.</li></ul> <b>D. Waste / Chemical Management</b> <ul style="list-style-type: none"><li>• No environmental deficiency was identified during the site inspection.</li></ul> <b>E. Permit / Licenses</b> <ul style="list-style-type: none"><li>• No environmental deficiency was identified during the site inspection.</li></ul> <b>F. Others</b> <ul style="list-style-type: none"><li>• Follow-up on previous audit (Ref. No.:80311). All the items have been rectified except 80311-01. Follow up action is needed for the outstanding items.</li></ul>	3.12

	Name	Signature	Date
Recorded by	Ian Ip		18 March 2008
Checked by	Dr. Priscilla Choy		19 March 2008



***Ocean Park Master Redevelopment Project***  
***Contract No. CW02 – Astounding Asia***



**Weekly Site Inspection Record Summary**

**Inspection Information**

Checklist Reference Number	80328
Date	28 March 2008 (Friday)
Time	11:25 – 12:25

Ref. No.	Non-Compliance	Related Item No.
-	None identified	-

Ref. No.	Remarks/Observations	Related Item No.
80318 – 01	<b>A. Water Quality</b> <ul style="list-style-type: none"> <li>Stockpile accumulated at the side of AA restaurant was still not clear. Contractor was reminded to cover them well.</li> </ul>	2.8
80318 – 03	<ul style="list-style-type: none"> <li>Leaves were accumulated at the U- channel at the New Panda habitat. Contractor was reminded to clean them up.</li> </ul>	2.17
80318 – 04	<b>B. Air Quality</b> <ul style="list-style-type: none"> <li>Stockpile was accumulated next to New Panda Habitat. Contractor was reminded to cover them.</li> </ul>	3.5
80318 – 02	<b>C. Noise</b> <ul style="list-style-type: none"> <li>No environmental deficiency was identified during the site inspection.</li> </ul> <b>D. Waste / Chemical Management</b> <ul style="list-style-type: none"> <li>Oil drums were found at the Flight Exercise Aviary. Contractor was reminded to remove them and provide with drip trays.</li> </ul> <b>E. Permit / Licenses</b> <ul style="list-style-type: none"> <li>No environmental deficiency was identified during the site inspection.</li> </ul> <b>F. Others</b> <ul style="list-style-type: none"> <li>Follow-up on previous audit (Ref. No.:80311). All the items have been rectified except 80318-01. Follow up action is needed for the outstanding items.</li> </ul>	5.3.4

	Name	Signature	Date
Recorded by	Ian Ip		28 March 2008
Checked by	Dr. Priscilla Choy		28 March 2008

---

---

**APPENDIX B  
SUMMARY OF AMOUNT OF WASTE  
GENERATED**

---

---

## Appendix B

Name of Department: W. Hing Construction Co., Ltd

Contract No.: CW-02

### Monthly Summary Waste Flow Table For March 2008

Month	Actual Quantities of Inert C&D Materials Generated		Non-inert C&D Waste disposed to Tseung Kwan O Sorting Facility	Non-inert C&D Waste disposed to SENT Landfill	Chemical Waste disposed to Chemical Waste Treatment Facility at Tsing Yi	Recycle Metals	Packaging (e.g. Plastic, paper wrapping etc.) and other general refuse
	Disposed to Public filling area at Tseung Kwan O	Disposed to Public Barging area at Quarry Bay					
	(in tonnes)	(in tonnes)	(in tonnes)	(in tonnes)	(in litres)	(in tonnes)	(in tonnes)
Sep-07	100.49	28.75	8.61	1.94	N/A	N/A	N/A
Oct-07	16.42	19.61	8.47	16.06	N/A	N/A	N/A
Nov-07	N/A	95.29	N/A	4.95	N/A	N/A	N/A
Dec-07	N/A	15.63	10.68	3.83	N/A	N/A	N/A
Jan-08	N/A	158.91	13.18	16.37	N/A	N/A	N/A
Feb-08	N/A	708.19	4.58	15.01	N/A	N/A	N/A
Mar-08	N/A	857.78	25.17	36.22	N/A	N/A	N/A
<b>Sub-total</b>	<b>116.91</b>	<b>1884.16</b>	<b>70.69</b>	<b>94.38</b>	<b>0.00</b>	<b>0.00</b>	<b>0.00</b>
Apr-08							
May-08							
Jun-08							
Jul-08							
Aug-08							
<b>Total</b>	<b>116.91</b>	<b>1884.16</b>	<b>70.69</b>	<b>94.38</b>	<b>0.00</b>	<b>0.00</b>	<b>0.00</b>

---

---

**APPENDIX C  
ENVIRONMENTAL MITIGATION  
IMPLEMENTATION SCHEDULE**

---

---

## Appendix C - Summary of Environmental Mitigation Implementation Schedule

Types of Impacts	Mitigation Measures	Status
<b>Construction Dust</b>	<ul style="list-style-type: none"> <li>Use of regular watering, with complete coverage, to reduce dust emissions from exposed site surfaces and unpaved roads, particularly during dry weather.</li> </ul>	*
	<ul style="list-style-type: none"> <li>Use of frequent watering for particularly dusty construction areas, temporary stockpiles and areas close to ASRs.</li> </ul>	*
	<ul style="list-style-type: none"> <li>Side enclosure and covering of any aggregate or dusty material storage piles to reduce emissions. Where this is not practicable owing to frequent usage, watering shall be applied to aggregate fines.</li> </ul>	N/A
	<ul style="list-style-type: none"> <li>Open stockpiles shall be avoided or covered. Where possible, prevent placing dusty material storage piles near ASRs.</li> </ul>	*
	<ul style="list-style-type: none"> <li>Restricting heights from which materials are dropped, as far as practicable to minimise the fugitive dust arising from unloading/ loading.</li> </ul>	^
	<ul style="list-style-type: none"> <li>Tarpaulin covering of all dusty vehicle loads transported to, from and between site locations.</li> </ul>	^
	<ul style="list-style-type: none"> <li>Use of vehicle wheel and body washing facilities at the exit points of the site.</li> </ul>	^
	<ul style="list-style-type: none"> <li>Provision of wind shield and dust extraction units or similar dust mitigation measures at the loading points, and use of water sprinklers at the loading area where dust generation is likely during the loading process of loose material, particularly in dry seasons/ periods.</li> </ul>	N/A
	<ul style="list-style-type: none"> <li>Imposition of speed controls for vehicles on unpaved site roads. Ten kilometers per hour is the recommended limit.</li> </ul>	^
	<ul style="list-style-type: none"> <li>Dusty activities should be re-scheduled if high-wind conditions are encountered.</li> </ul>	N/A
	<ul style="list-style-type: none"> <li>Where possible, routing of vehicles and positioning of construction plant should be at the maximum possible distance from ASRs.</li> </ul>	N/A
	<ul style="list-style-type: none"> <li>Suitable buffer zone should be provided and the works areas should be fenced off with hoarding. The height of hoarding should not be less than 2.4m from ground level.</li> </ul>	N/A
	<i>Crushing Plant</i> <ul style="list-style-type: none"> <li>Water sprays on the crusher.</li> <li>Fabric filters installed for the crushing plant.</li> <li>When transferring materials from crusher to the conveyors, chutes or dust curtains would be used for controlling dust.</li> </ul>	N/A N/A N/A

Types of Impacts	Mitigation Measures	Status
	<p><i>Barging Point &amp; Conveyor Belt System</i></p> <ul style="list-style-type: none"> <li>• The conveyors would be placed within a totally enclosed structure</li> <li>• Profiled steel cladding would be provided at two sides of loading point.</li> <li>• Dust suppression sprays would be installed and operated in strategic locations at the feeding inlet and outlet.</li> <li>• The barging point would be placed within a totally enclosed structure incorporating an enclosed chute for material transfer to the barge. Flexible curtain would be hanged on the enclosed chute prevent dust emission when excavated materials/rocks transported into the barge.</li> <li>• Some areas of the Park would remain open for visitors during the construction period. Therefore, suitable buffer zones from major construction activities should be provided where practical and the works areas should be fenced off with hoarding during the construction phase. It is recommended to erect hoarding of a height not less than 2.4m from ground level.</li> </ul>	<p>N/A</p> <p>N/A</p> <p>N/A</p> <p>N/A</p> <p>^</p>
Construction Noise	<p><i>Construction Phase</i></p> <ul style="list-style-type: none"> <li>• Only well-maintained plant should be operated on-site and plant should be serviced regularly during the construction programme</li> <li>• Silencers or mufflers on construction equipment should be utilized and should be properly maintained during the construction programme</li> <li>• Mobile plant, if any, should be sited as far from NSRs as possible.</li> <li>• Machines and plant (such as trucks) that may be in intermittent use should be shut down between work periods or should be throttled down to a minimum</li> <li>• Plant known to emit noise strongly in one direction should, wherever possible, be orientated so that the noise is directed away from the nearby NSRs</li> <li>• Material stockpiles and other structures should be effectively utilized, wherever practicable, in screening noise from on-site construction activities</li> </ul>	<p>^</p> <p>N/A</p> <p>N/A</p> <p>^</p> <p>^</p> <p>N/A</p>
	<p><i>Adoption of Quieter Plant</i></p> <ul style="list-style-type: none"> <li>• In order to reduce the excessive noise impacts at the affected NSRs at the Waterfront during normal daytime working hours, quieter plants are recommended. The Contractors do not have to use specific items of quiet plant adopted in this assessment. The Contractors may use other type of quiet plant, which have the same total SWL, to meet their needs</li> </ul>	<p>^</p>

Types of Impacts	Mitigation Measures	Status
	<p><i>Use of Movable Noise Barrier</i></p> <ul style="list-style-type: none"> <li>The use of movable barrier for certain PME could further alleviate the construction noise impacts. In general, 5dB (A) reduction for movable PME and 10dB (A) for stationary PME can be achieved depending on the actual design of movable noise barrier.</li> <li>The Contractor should be responsible for designing of the movable noise barrier with due consideration given to the size of the PME and the requirement of intercepting the line of sight between the NSRs and PME. Barrier material of surface mass in excess of 7kg/m<sup>2</sup> is recommended to achieve the predicted screening effect.</li> <li>Exceedance of up to 5dB (A) would be predicted at the Police Training School (NSR PTS) during the examination periods. Early liaison with the principal of this impacted school is recommended to plan for the construction programme. Noisy construction activities should be avoided during the examination period as far as practicable so as to reduce the potential noise impact at the school to comply with the noise criterion of 65dB(A).</li> </ul>	<p>N/A</p> <p>N/A</p> <p>N/A</p>
Ecology	<p><i>Construction Phase</i></p> <ul style="list-style-type: none"> <li>All excavation works carried out close to water bodies shall be carefully controlled to avoid runoff entering watercourses, especially during periods of heavy rain.</li> <li>Site runoff shall be directed towards regularly cleaned and maintained silt traps and where appropriate, oil/grease separators to minimize risk of sedimentation and pollution.</li> <li>Suitable size / capacity silt traps and oil/grease interceptors shall be used.</li> <li>Noise mitigation measures including the use of quiet construction plant and movable noise barriers shall be implemented to minimize disturbance to habitats adjacent to the work areas.</li> <li>Trees located within the works areas shall be preserved as far as practicable.</li> <li>Placement of equipment or stockpile in designated works areas and access routes selected on existing disturbed land to minimise disturbance to natural habitats</li> <li>Construction activities shall be restricted to the work areas that would be clearly demarcated</li> <li>The work areas shall be reinstated immediately after completion of the works</li> <li>Waste skips shall be provided to collect general refuse and construction wastes. The wastes would be disposed of timely and properly off-site.</li> <li>Drainage arrangements shall include sediment traps to collect and control construction run-off</li> <li>Open burning on works sites is illegal, and shall be strictly enforced</li> <li>Landscaping works on newly formed land shall as far as possible make use of native plant species</li> </ul>	<p>^</p> <p>N/A</p> <p>N/A</p> <p>N/A</p> <p>^</p> <p>^</p> <p>^</p> <p>^</p> <p>^</p> <p>N/A</p> <p>^</p> <p>^</p> <p>^</p>

Types of Impacts	Mitigation Measures	Status
Water Quality	<p><i>Construction Runoff and Drainage</i></p> <ul style="list-style-type: none"> <li>• Before commencing any site formation work, all sewer and drainage connections should be sealed to prevent debris, soil, sand etc. from entering public sewers/drains.</li> <li>• Temporary ditches should be provided to facilitate run-off discharge into appropriate watercourses, via appropriately sized/ designed silt retention pond or similar structure. No site run-off should enter artificial ponds. Cut-off ditches should be provided for all major site clearance/ excavation works where soils would be exposed so that instances of uncontrolled run-off from exposed areas would be minimized. As well as channels, earth/ concrete bunds and/ or sand bags, as appropriate, should be deployed to direct surface run-off towards channels. Catchpits and perimeter channels should be constructed in advance of relevant site formation works.</li> <li>• Boundaries of earthworks should be marked and surrounded by dykes or embankments for flood protection, as necessary.</li> <li>• Sand/silt removal facilities such as sand/silt traps and sediment basins should be provided to remove sand/silt particles from runoff to meet the requirements of the Technical Memorandum standard under the Water Pollution Control Ordinance. The design of silt removal facilities should be based on the guidelines provided in ProPECC PN 1/94. All drainage facilities and erosion and sediment control structures should be inspected monthly and maintained to ensure proper and efficient operation at all times and particularly during rainstorms.</li> <li>• Silt removal facilities, channels and manholes should be maintained and the deposited silt and grit should be regularly removed, at the onset of and after each rainstorm to ensure that these facilities are functioning properly at all times.</li> <li>• Exposed soil surfaces should be covered.</li> <li>• Water pumped out from foundation excavations should be discharged into silt removal facilities.</li> <li>• If excavation cannot be avoided during rainy seasons, temporarily exposed slope/soil surfaces should be covered by a tarpaulin or other means, as far as practicable, and temporary access roads should be protected by crushed stone or gravel, as excavation proceeds. Intercepting channels should be provided (e.g. along the crest/ edge of the excavation) to prevent storm runoff from washing across exposed soil surfaces. Arrangements should always be in place to ensure that adequate surface protection measures can be safely carried out well before the arrival of a rainstorm.. Other measures that need to be implemented before, during and after rainstorms are summarized in ProPECC PN 1/94.</li> <li>• Exposed soil areas should be minimized to reduce potential for increased siltation and contamination of runoff.</li> <li>• Earthwork final surfaces should be well compacted and subsequent permanent work or surface protection should be immediately performed. Appropriate intercepting channels should be provided where necessary. Rainwater pumped out from trenches or excavations should be directed to silt removal facilities before discharge.</li> </ul>	<p>^</p> <p>^</p> <p>^</p> <p>^</p> <p>^</p> <p>*</p> <p>^</p> <p>^</p> <p>^</p> <p>^</p>



Types of Impacts	Mitigation Measures	Status
	<ul style="list-style-type: none"> <li>Open stockpiles of construction materials or construction wastes on-site of more than 50m<sup>3</sup> should be covered with tarpaulin or similar fabric during rainstorms</li> </ul>	N/A
	<i>General Construction Activities</i> <ul style="list-style-type: none"> <li>Debris and refuse generated on-site should be collected</li> <li>Oils and fuels should only be used and stored in designated areas which have pollution prevention facilities. To prevent spillage of fuels and solvents to nearby water bodies and public drains</li> </ul>	^ ^
	<i>Sewage from Construction Workforce</i> <ul style="list-style-type: none"> <li>Temporary sanitary facilities, such as portable chemical toilets, should be employed on-site where necessary to handle sewage from the workforce. A licensed contractor would be responsible for appropriate disposal of waste matter and maintenance of these facilities</li> </ul>	^
<b>Waste / Chemical</b>	<i>Good Site Practice</i> <ul style="list-style-type: none"> <li>nomination of an approved personnel, such as a site manager, to be responsible for good site practices, arrangements for collection and effective disposal to an appropriate facility, of all wastes generated at the site</li> <li>regular cleaning and maintenance programme for drainage systems, sumps and oil interceptors</li> <li>training of site personnel in proper waste management and chemical handling procedures</li> <li>provision of sufficient waste disposal points and regular collection for disposal</li> <li>appropriate measures to minimise windblown litter and dust during transportation of waste by either covering trucks or by transporting wastes in enclosed containers</li> </ul>	^ N/A ^ * ^
	<i>Waste Reduction Measures</i> <ul style="list-style-type: none"> <li>sort C&amp;D waste from demolition and decommissioning of the existing facilities to recover recyclable portions such as metals</li> <li>segregation and storage of different types of waste in different containers, skips or stockpiles to enhance reuse or recycling of materials and their proper disposal.</li> <li>proper storage and site practices to minimise the potential for damage or contamination of construction materials</li> <li>to encourage collection of aluminium cans by individual collectors, separate labelled bins shall be provided to segregate this waste from other general refuse generated by the work force.</li> <li>plan and stock construction materials carefully to minimise amount of waste generated and avoid unnecessary generation of waste.</li> </ul>	^ ^ ^ ^ ^

Types of Impacts	Mitigation Measures		Status
	<i>General Refuse</i> <ul style="list-style-type: none"> <li>General refuse should be stored in enclosed bins or compaction units separate from C&amp;D material. A reputable waste collector should be employed by the contractor to remove general refuse from the site, separately from C&amp;D material. Preferably an enclosed and covered area should be provided to reduce the occurrence of 'wind blown' light material.</li> </ul>		^
	<i>Construction and Demolition Material</i> <ul style="list-style-type: none"> <li>A Waste Management Plan should be prepared.</li> <li>In order to monitor the disposal of C&amp;D and solid wastes at public filling facilities and landfills and to control fly-tipping, a trip-ticket system should be included. One may make reference to ETWB TCW No.31/2004 for details.</li> <li>A recording system for the amount of wastes generated, recycled and disposed (including the disposal sites) should be proposed.</li> </ul>		^  ^  ^
	<i>Chemical Waste</i> <ul style="list-style-type: none"> <li>If chemical wastes are produced at the construction site, the Contractor would be required to register with the EPD as a Chemical Waste Producer and to follow the guidelines stated in the Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes. Good quality containers compatible with the chemical wastes should be used, and incompatible chemicals should be stored separately. Appropriate labels should be securely attached on each chemical waste container indicating the corresponding chemical characteristics of the chemical waste, such as explosive, flammable, oxidizing, irritant, toxic, harmful, corrosive, etc. The Contractor shall use a licensed collector to transport and dispose of the chemical wastes, to either the Chemical Waste Treatment Centre at Tsing Yi, or another licensed facility, in accordance with the Waste Disposal (Chemical Waste) (General) Regulation</li> </ul>		^
Remarks:	^ Compliance of mitigation measure;	X Non-compliance of mitigation measure;	
	N/A Not Applicable;	• Non-compliance but rectified by the contractor;	
	* Recommendation was made during site audit but improved/rectified by the contractor.		

---

---

**APPENDIX D**  
**EVENT ACTION PLANS**

---

---

**Appendix D: Event and Action Plan for Construction Noise**

Event	Action		
	Contractor's ET	Contractor	PM
Action Level	<ol style="list-style-type: none"> <li>1. Identify source</li> <li>2. Notify Contractor and PM</li> <li>3. Conduct additional noise monitoring to investigate the causes, if necessary</li> <li>4. Report the investigation results to Contractor and PM</li> <li>5. Discuss with Contractor for their formulation of remedial measures if the exceedance is related to construction works</li> <li>6. Conduct additional monitoring to check mitigation effectiveness, if necessary</li> </ol>	<ol style="list-style-type: none"> <li>1. Take immediate action to avoid further exceedance</li> <li>2. Submit noise mitigation proposals to Contractor's ET and PM</li> <li>3. Implement noise mitigation proposals</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm receipt of notification of failure in writing</li> <li>2. Notify Contractor</li> <li>3. Require Contractor to propose remedial measures for the analysed noise problem</li> <li>4. Ensure remedial measures are properly implemented</li> </ol>
Limit Level	<ol style="list-style-type: none"> <li>1. Identify source</li> <li>2. Notify Contractor and PM</li> <li>3. Conduct additional noise monitoring and analyse Contractor's working procedures to determine possible cause of exceedance, if necessary</li> <li>4. Provide interim report to Contractor and PM on the causes and proposed action to be taken for the exceedances if exceedance is related to construction works</li> <li>5. Assess effectiveness by additional monitoring and report Contractor and PM, if necessary</li> <li>6. If exceedance stops, cease additional monitoring, if any</li> </ol>	<ol style="list-style-type: none"> <li>1. Take immediate action to avoid further exceedance</li> <li>2. Submit proposals for remedial actions to Contractor's ET, and PM within 3 working days of notification</li> <li>3. Implement the agreed proposals</li> <li>4. Resubmit proposals if problem still not under control</li> <li>5. Stop the relevant portion of works as determined by the PM until the exceedance is abated</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm receipt of notification of failure in writing</li> <li>2. Notify Contractor</li> <li>3. Require Contractor to propose remedial measures for the analysed noise problem</li> <li>4. Ensure remedial measures are properly implemented</li> <li>5. If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated</li> </ol>

**Appendix D: Event and Action Plan for Air Quality**

Event	Action		
	Contractor's ET	Contractor	PM
Action Level	1. Identify source 2. Notify Contractor and PM 3. Conduct additional monitoring to investigate the causes, if necessary 4. Report the investigation results and if exceedance to Contractor and PM	1. Take immediate action to avoid further exceedance and rectify any unacceptable practice. 2. Submit air mitigation proposal and PM for agreement if Contractor's ET indicated that exceedance is related to the construction works 3. Implement agreed proposal within a time scale agreed with PM	1. Confirm receipt of notification of failure in writing 2. Notify Contractor 3. Require Contractor to submit air mitigation proposal 4. Ensure remedial measures are properly implemented
Limit Level	1. Identify source 2. Notify Contractor and PM 3. Conduct additional monitoring and investigate the causes, if necessary	1. Take immediate action to avoid further exceedance and rectify any unacceptable practice 2. In consultation with the PM, submit air mitigation proposal to PM for agreement within 3 working days of notification if Contractor's ET indicated that exceedances are related to construction works 3. Implement agreed proposal within a time scale agreed with PM 4. Amend working methods if appropriate.	1. Confirm receipt of notification of failure in writing 2. Notify Contractor 3. Require Contractor to submit air mitigation proposal 4. Ensure remedial measures are properly implemented

---

---

**APPENDIX E**  
**TENTATIVE WORKS PROGRAMME**

---

---

## OUTLINE PROGRAMME

	Aug-07	Sep-07	Oct-07	Nov-07	Dec-07	Jan-08	Feb-08	Mar-08	Apr-08	May-08	Jun-08	Jul-08	Aug-08	Sep-08	Oct-08	Nov-08	Dec-08	Jan-09	Feb-09
<b>NEW BIRD HOUSE</b>																			
Substructure / Structure																			
Builders Works																			
Building Services																			
<b>FLIGHT EXERCISE AVIARY</b>																			
Substructure / Structure																			
Builders Works																			
Building Services																			
<b>BIRDS CENTRAL KITCHEN</b>																			
Substructure / Structure																			
Builders Works																			
Building Services																			
<b>MAIN AVIARY</b>																			
Substructure / Structure																			
Builders Works																			
Building Services																			
<b>AA RESTAURANT &amp; TOILET BLOCK</b>																			
Substructure / Structure																			
Builders Works																			
Building Services																			
<b>NEW PANDA HABITAT &amp; BOH</b>																			
Substructure / Basement																			
Switch Room & Generator																			
Structural Frame & Roof																			
BOH, Classroom, Preshow																			
Animal Exhibits																			
Building Services																			
<b>FARMHOUSE RETAIL</b>																			
Substructure / Structure																			
Builders Works																			
Building Services																			
<b>NEW BIRD THEATRE &amp; BOH</b>																			
Substructure / Structure																			
Builders Works																			
Building Services																			
<b>EXTERNAL WORKS</b>																			
Formation																			
Mains & Drains																			
Electrical & Fire																			
Landscaping																			
Irrigation Etc																			