# **CONTRACT NO: KL/2009/01**

# SITE FORMATION FOR KAI TAK CRUISE TERMINAL DEVELOPMENT

# QUARTERLY ENVIRONMENTAL MONITORING & AUDIT REPORT

- JUNE TO AUGUST 2011 -

CLIENT: PREPARED BY:

Penta-Ocean Construction Co., Ltd.

Unit 601, K. Wah Centre, 191 Java Road, North Point, Hong Kong Lam Environmental Services Limited

11/F Centre Point 181-185 Gloucester Road, Wanchai, H.K.

Telephone: (852) 2882-3939 Facsimile: (852) 2882-3331 E-mail: <u>info@lamenviro.com</u> Website: http://www.lamenviro.com

**CERTIFIED BY:** 

Raymond Dai Environmental Team Leader

DATE:

21 September 2011



# **TABLE OF CONTENTS**

EXI	ECUTI\	/E SUMMARY	III
1.	INTR	ODUCTION	1
	1.1 1.2	Scope of the ReportStructure of the Report	1 1
2.	PRO	JECT BACKGROUND	2
	2.1 2.2 2.3 2.4	Background Scope of the Project and Site Description Project Organization Principal Work and Activities	2 2
3.	MON	ITORING REQUIREMENTS	4
	3.1. 3.2.	Noise Monitoring	
4.	MON	ITORING RESULTS	6
	4.1. 4.2. 4.3.	Water Monitoring Results	6
5. NO		PLIANCE AUDIT, REVIEW OF THE REASONS FOR AND THE IMPLICATIONS OF	9
	5.1. 5.2. 5.3. 5.4. 5.5. 5.6.	Noise Monitoring	9 9 10
6.	COM	PLAINTS, NOTIFICATION OF SUMMONS AND PROSECUTION	13
-	CON	CLUCION	4.4



# **LIST OF TABLES**

Table I	Principle Work Activities in the Reporting Quarter
Table 2.2	Contact Details of Key Personnel
Table 2.4	Principle Work Activities during the Reporting Quarter
Table 3.1	Noise Monitoring Stations
Table 3.2	Marine Water Quality Stations for Water Quality Monitoring
Table 3.3	Water Quality Monitoring Frequency and Parameters
Table 4.1.1	Summary of Exceedances Recorded in the Reporting Quarter
Table 4.2.1	Compliance with EP Conditions in the Reporting Quarter
Table 4.2.2	Waste Quantities Related To Dredging Works
Table 5.4	Upper Bound of Natural Variation Levels at Water Monitoring Stations
Table 6.1	Environmental Complaints Log
Table 6.2	Cumulative Statistics on Complaints
Table 6.3	Cumulative Statistics on Successful Prosecutions

# **LIST OF FIGURES**

<u>Figure 2.1</u>	General Layout
Figure 2.2	Project Organization Chart
Figure 3.1	Layout of Environmental Monitoring Stations
Figure 4.1	Layout of Monitoring Stations for Water Quality Surveillance System

# LIST OF APPENDICES

Appendix 2.1	Implementation Schedule of Environmental Mitigation Measures
Appendix 3.1	Action and Limit Levels
Appendix 4.1	Graphical Presentation of Water Quality Monitoring Results
Appendix 4.2	Graphical Presentation of Water Quality Surveillance System
Appendix 5.1	Event and Action Plan
Appendix 5.2	Graphic Presentation of SS Results against to Tidal Movement along Victoria
	Harbour
Appendix 5.3	Graphic Presentation of Water Quality Result with respect to Local Variation
Appendix 7.1	Construction Programme

#### **EXECUTIVE SUMMARY**

i. This is the fifth Quarterly Environmental Monitoring and Audit (EM&A) Report – June to August 2011 for the Site Formation for Kai Tak Cruise Terminal Development under Contract No. KL/2009/01. Dredging of marine sediment has been commenced since 28 June 2010 while removal and reconstruction of existing seawall has been commenced since 22 November 2010. This report presents the environmental monitoring findings and information recorded during the period from June to August 2011.

#### Construction Activities in the Reported Period

ii. During the reporting period, the principle work activities are summarized as below:

Table I Principle Work Activities in the Reporting Quarter

	June 2011		July 2011		August 2011
•	Dredging of Marine Sediment;	•	Removal of Existing Seawall;	•	Removal of Existing Seawall;
•	Removal of Existing Seawall; Fabrication and installation of	•	Fabrication and installation of silt curtain for seawall removal;	•	Fabrication and installation of silt curtain for seawall removal;
	silt curtain for seawall removal; Maintenance of Silt Curtain	•	Maintenance of Silt Curtain and Silt Screens;	•	Maintenance of Silt Curtain and Silt Screens;
	and Silt Screens; Sorting of inert C&D material	•	Sorting of inert C&D material from existing seawall;	•	Sorting of inert C&D material from existing seawall;
	from existing seawall;	•	Disposal of surplus fill material	•	Disposal of surplus fill material
•	Disposal of surplus fill material off-site; and	•	off-site; and Reconstruction of New	•	off-site; and Reconstruction of New
•	Reconstruction of New Seawall		Seawall		Seawall

# Noise Monitoring

iii. Due to the non-existence of planned NSRs during the reporting quarter, no noise monitoring was required to be conducted at the planned noise monitoring locations NM1 and NM2.

## Water Quality Monitoring

iv. Water quality monitoring was conducted at 6 designated monitoring stations namely WSD9, WSD10, WSD15, WSD17, WSD19 and WSD21. Total 11 SS exceedances were recorded in the reporting period. Investigation found that the all SS exceedances were located at the upstream of the Project site.

#### Water Quality against the Tidal Movement along Victoria Harbour

v. Comparison of the monitoring station at project downstream stations with the upstream monitoring stations indicates that no SS exceedances recorded at the WSD intakes downstream to the project and no rising SS level in downstream across the Victoria Harbour after passing the project location. It concluded that no water quality impact was arising from the Project works.

#### **Natural Variation Comparison**

vi. Based on the determination of upper bound of the natural variation levels from the Supplementary to Baseline Water Quality Monitoring Report, all SS results in reporting quarter were well within the upper bound of natural variation levels. Thus, all recorded exceedances were well within the tolerance of background level.

#### Water Quality Surveillance System

- vii. With reference to the upper bound of natural variation levels and water quality surveillance conducting in reporting period, it shows no fluctuation over the upper bound and hence this further supports such exceedances are not caused by dredging activities.
- viii. Since the investigations found that the exceedances recorded in the reporting quarter were not related to the Project, it was concluded that all necessary steps under Event and Action Plan had been taken. The details of Event and Action Plans and Notification of Exceedance summarizing the finding of investigation, possible causes can be referred to the Monthly EM&A Reports.

#### Waste Management

- ix. In this reporting quarter, there were marine sediment (Type 1 Open Sea Disposal and Type 1 Open Sea Disposal (Dedicate Sites) and Type 2 Confined Marine Disposal) disposed to South Cheung Chau Spoil Disposal Area denoted "KTCT-1" and "KTCT -2" and East Sha Chau Contaminated Mud Disposal Site Pit IVc respectively.
- x. The dredging and disposal of the sediment (Type 1 Open Sea Disposal (Dedicate Sites) and Type 2 Confined Marine Disposal) to East Sha Chau Contaminated Mud Disposal Site Pit IVc was completed in August 2011.
- xi. There were 9,000m³ inert surplus fill materials and 35m³ non-inert C&D material related to dredging works were disposed off site in this reporting quarter.

#### Complaints, Notifications of Summons and Successful Prosecutions

xii. No complaint, notification of prosecutions or summons was received in the reporting quarter.

#### 1. INTRODUCTION

# 1.1 Scope of the Report

- 1.1.1. Lam Environmental Services Limited (LES) has been appointed to work as the Environmental Team (ET) for dredging works to implement the Environmental Monitoring and Audit (EM&A) programme for the Site Formation for Kai Tak Cruise Terminal Development under Contract No. KL/2009/01. Dredging of marine sediment and removal and reconstruction of existing seawall were commenced on 28 June and 22 November 2010 respectively.
- 1.1.2. This report presents the environmental monitoring and auditing work carried out in accordance to the Section 10.7 under Environmental Monitoring and Audit (EM&A) Manual.
- 1.1.3. This report documents the finding of EM&A works during the quarter from June to August 2011.

#### 1.2 Structure of the Report

- **Section 1** *Introduction* details the scope and structure of the report.
- **Section 2 Project Background** summarizes background and scope of the Project, site description, project organization and contact details of key personnel during the reporting period.
- **Section 3** *Monitoring Requirements* summarizes all monitoring parameters, monitoring locations, monitoring frequency, duration and action plan.
- **Section 4** *Monitoring Results* summarizes the monitoring results obtained in the reporting period.
- Section 5 Compliance Audit, Review of the Reasons for and the Implication of Non-compliance summarizes the auditing of monitoring results, all exceedances environmental parameters, review the reasons for and the implication of non-compliance.
- Section 6 *Complaints, Notification of summons and Prosecution* summarizes the cumulative statistics on complaints, notification of summons and prosecution
- Section 7 Conclusion



#### 2. PROJECT BACKGROUND

# 2.1 Background

- 2.1.1. The former Kai Tak Airport located in the south-eastern part of Kowloon Peninsula was the international airport of Hong Kong. The Kai Tak Airport had come into operations since 1920s. The operation of the Kai Tak Airport was ceased and replaced by the new airport at Chek Lap Kok in July 1998. After closure, the disused airport site has been occupied by various temporary uses, including a golf driving range on the runway area.
- 2.1.2. In 2002, the Chief Executive in Council approved the Kai Tak Outline Zoning Plans (No. S/K19/3 and S/K21/3) to provide the statutory framework to proceed with the South East Kowloon Development at the former Kai Tak Airport. However, following the judgment of the Court of Final Appeal in January 2004 regarding the Harbour reclamation, the originally proposed development which involves reclamation has to be reviewed. The Kai Tak Planning Review (KTPR) has resulted with a Preliminary Outline Development Plan (PODP) for Kai Tak in October 2006. Subsequently, the Administration announced in October 2006 a plan to implement a cruise terminal at Kai Tak, as part of the development.
- 2.1.3. Development of the cruise terminal at Kai Tak would require dredging at the existing seawall at the southern tip of the former Kai Tak Airport runway for construction of a quay deck structure for two berths, and dredging the seabed fronting the new quay to provide necessary manoeuvring basin. The general layout of the proposed cruise terminal construction is shown in *Figure 2.1*.
- 2.1.4. The current Project involves a dredging operation exceeding 500,000m³ for construction and operation of the proposed cruise terminal at Kai Tak and is therefore classified as a Designated Project under Item C.12, Part I, Schedule 2 of the Environmental Impact Assessment Ordinance (EIAO). An Environmental Impact Assessment (EIA) Study for the Project has been undertaken in accordance with the EIA Study Brief (No. ESB-159/2006) and the Technical Memorandum on Environmental Impact Assessment Process (EIAO-TM).

#### 2.2 Scope of the Project and Site Description

- 2.2.1. The scope of the Project comprises:
  - Dredging of marine sediment of about 700,000m<sup>3</sup> from the existing seabed (Stage 1 dredging) in the Harbour area off the southern tip of the former Kai Tak Airport runway to provide the necessary water depth within the manoeuvring area for cruise vessels; and
  - Removal of existing seawall of about 322,300m<sup>3</sup> by dredging at the southern tip of the former Kai Tak Airport runway for cruise berth construction.

# 2.3 Project Organization

2.3.1. Kowloon Development Office of Civil Engineering and Development Department is the overall project controller. For the construction phase of the Project, Project Engineer, Contractor,

Environmental Team and Independent Environmental Checker are appointed to manage and control environmental issues.

2.3.2. The proposed project organization and lines of communication with respect to environmental protection works are shown in <u>Figure 2.2</u>. Key personnel and contact particulars are summarized in *Table 2.2*:

Table 2.2 Contact Details of Key Personnel

Party	Role	Name	Post	Contact No.	Contact Fax
Civil Engineering and Development Department (Kowloon Development Office)	Project Proponent	Ir. KY Shin	Senior Engineer	2301 1461	2301 1277
URS /	Engineer's	Mr. Stephen Cheng	Chief Resident	2148 7638	2148 7277
Scott Wilson Limited	Representative		Engineer		
Penta-Ocean Construction	Contractor	Mr. H. Taguchi	Project Manager	2148 7238	2148 7138
Company Limited		Mr. Warren Tse	Site Agent		
		Mr. Perry Yam	Environmental Officer		
Fugro (HK) Limited	Independent Environmental Checker (IEC)	Mr. Joseph Poon	Independent Environmental Checker (IEC)	2450 8238	2450 6138
Lam Environmental Services Limited	Environmental Team Leader	Mr. Raymond Dai	Environmental Team Leader (ETL)	2882 3939	2882 3331

# 2.4 Principal Work and Activities

2.4.1. During this reporting quarter, the principal work activities are summarized in **Table2.4**.

Table 2.4 Principle Work Activities during the Reporting Quarter

	June 2011		July 2011		August 2011
•	Dredging of Marine Sediment;	•	Removal of Existing Seawall;	•	Removal of Existing Seawall;
•	Removal of Existing Seawall;	•	Fabrication and installation of	•	Fabrication and installation of
•	Fabrication and installation of		silt curtain for seawall removal;		silt curtain for seawall removal;
	silt curtain for seawall removal;	•	Maintenance of Silt Curtain and Silt Screens;	•	Maintenance of Silt Curtain and Silt Screens;
•	Maintenance of Silt Curtain and Silt Screens;	•	Sorting of inert C&D material from existing seawall;	•	Sorting of inert C&D material from existing seawall:
•	Sorting of inert C&D material from existing seawall;	•	Disposal of surplus fill material	•	Disposal of surplus fill material
•	Disposal of surplus fill material		off-site; and		off-site; and
	off-site; and	•	Reconstruction of New Seawall	•	Reconstruction of New Seawall
	Reconstruction of New Seawall				

2.4.2. Implementation status of the recommended mitigation measures during this reporting period is presented in *Appendix 2.1*.

#### 3. MONITORING REQUIREMENTS

## 3.1. Noise Monitoring

3.1.1. In accordance with the EIA Report and the approved EM&A Manual, it is anticipated that construction activities, if unmitigated, would not cause any adverse noise impact to the nearest NSRs in the vicinity of the work site. The predicted noise levels at the NSRs would comply with construction noise criteria. These nearest NSRs are designated for construction noise monitoring as listed in *Table 3.1*.

Table 3.1 Noise Monitoring Stations

Station	Description
NM1	Planned Residential Development (R3 site)
NM2	Planned Residential Development (R3 site)

3.1.2. As per S.3.1.1 of the approved EM&A Manual states that "Noise levels shall be monitored to evaluate the construction noise impact if there is any planned noise sensitive receivers (NSRs) occupied within 300m from the works area of this Project during the proposed dredging works". Therefore, the impact monitoring for construction noise shall only be carried out when the planned residential development at the two identified monitoring stations are occupied at a later stage.

# 3.2. Water Quality Monitoring

- 3.2.1. The EIA Report has identified that suspended solids (SS) would be the most critical water quality parameter during the dredging operations. Water quality monitoring for SS and turbidity is therefore recommended to be carried out at selected WSD flushing water intakes. The impact monitoring should be carried out during the proposed dredging works for cruise terminal construction to ensure the compliance with the water quality standards.
- 3.2.2. It is proposed to monitor the water quality at six WSD flushing water intakes along the seafront of the Victoria Harbour. The proposed water quality monitoring stations are shown in *Table 3.2* and *Figure 3.1*.

Table 3.2 Marine Water Quality Stations for Water Quality Monitoring

Station Ref.	WSD Flushing Water Intake	Easting	Northing
WSD9	Tai Wan	837921.0	818330.0
WSD10	Cha Kwo Ling	841900.9	817700.1
WSD15	Sai Wan Ho	841110.4	816450.1
WSD17	Quarry Bay	839790.3	817032.2
WSD21	Wan Chai	836220.8	815940.1
WSD19	Sheung Wan	833415.0	816771.0

#### WATER QUALITY PARAMETERS AND FREQUENCY

- 3.2.3. During the period of dredging, monitoring should be undertaken three days per week, at midflood and mid-ebb tides, with sampling / measurement at the designated monitoring stations as shown in *Table 3.2*. The interval between two sets of monitoring should not be less than 36 hours except where there are exceedances of Action and/or Limit Levels, in which case the monitoring frequency will be increased. *Table 3.3* shows the proposed monitoring frequency and water quality parameters. Duplicate in-situ measurements and water sampling should be carried out in each sampling event. For selection of tides for in-situ measurement and water sampling, tidal range of individual flood and ebb tides should not be less than 0.5m.
- 3.2.4. Silt screens in frame type or floating type shall be deployed at these intakes during the dredging period. It is recommended to conduct the monitoring behind the silt screens at the seawater intake culvert at each seawater pumping station to collect information on the water quality condition after passed the silt screen.

Table 3.3 Water Quality Monitoring Frequency and Parameters

Activities	Monitoring Frequency <sup>1</sup>	Parameters <sup>2</sup>
During the 4-week baseline monitoring period	Three days per week, at mid-flood and mid-ebb tides	Turbidity (in NTU), Suspended Solids (SS in mg/L)
During dredging works for proposed cruise terminal at Kai Tak	Three days per week, at mid-flood and mid-ebb tides	Turbidity (in NTU), Suspended Solids (SS in mg/L)

#### Notes:

- 1. For selection of tides for in-situ measurement and water sampling, tidal range of individual flood and ebb tides should be not less than 0.5m.
- 2. Turbidity should be measured in situ whereas SS should be determined by laboratory.
- 3.2.5. The established Action and Limit levels according to the approved baseline monitoring report for monitoring works can be referred to *Appendix 3.1*.

#### 4. MONITORING RESULTS

## 4.1. Water Monitoring Results

- 4.1.1. The water quality monitoring was commenced concurrently with the commencement of dredging works on 28 June 2010. Water quality monitoring was conducted at 6 designated monitoring stations namely WSD9, WSD10, WSD15, WSD17, WSD19 and WSD21 during the reporting quarter.
- 4.1.2. Water monitoring results measured in this reporting period are reviewed and summarized. Details of graphical presentation can be referred in <u>Appendix 4.1.</u> The details of exceedances are summarized in **Table 4.1.1**.

WSD10 **WSD15** WSD17 WSD9 **WSD19** WSD21 Turb SS Turb SS Turb SS Turb SS Turb Turb SS SS NTU NTU NTU NTU Period Level mg/L mg/L mg/L mg/L NTU mg/L NTU mg/L Mid-flood Jun-11 ΑL Jul-11 Aug-11 Mid-ebb Jun-11 AL Jul-11 Aug-11 **Total of AL Exceedances:** Mid-flood Jun-11 LL Jul-11 Aug-11 Mid-ebb LL Jun-11 Jul-11 Aug-11 **Total of LL Exceedances: Total of Exceedances:** 

Table 4.1.1 Summary of Exceedances Recorded in the Reporting Quarter

4.1.3. Total 11 SS exceedances were recorded in the reporting period. Investigation found that all SS exceedances were located at upstream of the Project site which means exceedances are not due to the Project work. Besides, there was no rising SS level in downstream across the Victoria Harbour after passing the project location when the exceedances in upstream stations were recorded. Details of investigations can be referred in Section 5.

# 4.2. Water Quality Surveillance System

- 4.2.1. Six self water quality surveillance monitoring events for removal of existing seawall were conducted in the reporting period. Turbidity and SS monitoring were conducted at 12 locations as follows and shown in *Figure 4.1*.
  - One sampling point inside the silt curtain (SP1);
  - Four sampling points outside the silt curtain (MP1-MP4);

- Seven control points (C1-C7)
- 4.2.2. The graphical presentation of the SS levels at SP1, sampling points outside the silt curtain, control points and impact water quality monitoring stations against the distance are shown in **Appendix 4.2**.

# 4.3. Dredging and Disposal

4.3.1. Implementation of mitigation measures for dredging work and the associated dredging records were checked and the findings are summarized in *Table 4.2.1*.

Table 4.2.1 Compliance with EP Conditions in the Reporting Quarter

EP Condition	Compliance Status and/or Recommendation	
2.6	In accordance with the EP requirement	
Silt Curtain Deployment		
2.6	Complied with the EP requirement in reporting quarter:	
For removal of the existing seawall and the seabed, Daily Dredging Rate ≤ 4,000m3/d Hourly Dredging Rate ≤ 334m3/hr	Maximum daily Dredging Rate was at 2,362m <sup>3</sup> /day and Maximum hourly Dredging Rate was at 173m <sup>3</sup> /hr.	
2.7 Daily Dredging Rate ≤ 4,000m³/d Hourly Dredging Rate ≤ 334m³/hr	Complied with the EP requirement in reporting month:  Maximum daily Dredging Rate was at 2,417m³/day and  Maximum hourly Dredging Rate was at 155m³/hr.	
2.8 Silt Screen Deployment	In accordance with the Silt Screen Deployment Plan for all 6 intakes	

- 4.3.2. The daily and hourly dredging rates were checked and reviewed that were below the EP requirements. It was concluded that the dredging was conducted in compliance with the specific EP requirements.
- 4.3.3. The dredging and disposal of the sediment (Type 1 Open Sea Disposal (Dedicate Sites) and Type 2 Confined Marine Disposal) to East Sha Chau Contaminated Mud Disposal Site Pit IVc was completed.
- 4.3.4. There were 9,000m³ inert surplus fill materials and 35m³ non-inert C&D material related to dredging works were disposed off site in this reporting quarter.
- 4.3.5. Details of the marine sediment dumping are summarized in *Table 4.2.2*.

# Table 4.2.2 Waste Quantities Related To Dredging Works

Waste Type	Quantity this quarter, m <sup>3</sup> , (Bulk Volume)	Cumulative Quantity- to-Date,m³, (Bulk Volume)	Disposal / Dumping Grounds	
Marine Sediment (Type 1 – Open Sea Disposal)	29,922	236,408	South Cheung Chau Spoil Disposal Area denoted "KTCT-1" and "KTCT -2"	
Marine Sediment (Type 1 – Open Sea Disposal (Dedicated Sites) & Type 2 – Confined Marine Disposal)	608	147,649	East Sha Chau Contaminated Mud Disposal Site – Pit IVc	

# 5. COMPLIANCE AUDIT, REVIEW OF THE REASONS FOR AND THE IMPLICATIONS OF NON-COMPLIANCE

5.0.1. The Event Action Plan for construction noise and water quality is presented in Appendix 5.1.

#### 5.1. Noise Monitoring

5.1.1. Noise monitoring was not necessary in the reporting period.

#### 5.2. Water Quality Monitoring

- 5.2.1. For the suspended solid, the details of exceedances in the reporting period are as follows:
  - No exceedance was recorded at WSD9;
  - 6 Action Level and 3 Limit Level exceedances were recorded at WSD10;
  - 1 Action Level exceedance was recorded at WSD15;
  - 1 Action Level exceedance was recorded at WSD17;
  - No exceedance was recorded at WSD19; and
  - No exceedance was recorded at WSD21
- 5.2.2. Total 11 numbers of SS exceedances were recorded in the reporting period. Silt curtain and silt screens were checked and confirmed in proper condition during the water monitoring. Investigation found that all SS exceedances were located at upstream of the Project site and these exceedances considered were due to upstream sources of the WSD intakes.
- 5.2.3. For the exceedances, further investigations were conducted to determine the cause of impact in terms of the following areas:
  - Water Quality against the Tidal Movement along Victoria Harbour;
  - · Natural Variation Comparison; and
  - Water Quality Surveillance System
- 5.2.4. More details on the investigation are given in Section 5.3 to 5.5.

## 5.3. Water Quality against the Tidal Movement along Victoria Harbour

- 5.3.1. In order to conclude the cause of an adverse water quality impact, the trend across the 6 monitoring stations is reviewed. Whether the adverse impact is due to project work will be evaluated from the trend of SS level in downstream across the Victoria Harbour after passing the project location. By observing this trend of SS, contribution of the adverse water quality impact from the dredging activities under the project can be evaluated by checking if there is a significant rising up trend in the SS level in the WSD intakes at project downstream.
- 5.3.2. Moreover, a comparison of the monitoring station at project downstream stations with the upstream monitoring stations can also indicate whether the extent of exceedance in SS content recorded at the WSD intakes downstream to the project is likely to be caused by upstream source or not. If the SS values of the upstream and downstream show similar levels, the impact at the project downstream stations shall probably be due to the project upstream streams and the contribution from project work can be eliminated. A review on the

- tidal movement across the Victoria Harbour is plotted against the SS results against and graphical presentation is presented in *Appendix 5.2*.
- 5.3.3. Investigations on the recorded upstream exceedances revealed that there were no significant rising up trend of SS levels across the Victoria Harbour after passing the project location. It concluded that no adverse water quality impact was arising from the Project works.

## 5.4. Natural Variation Comparison

- 5.4.1. Referring to the ER Letter ref. CEDD/KL/2009/01/M45/130(369767) dated 14 February 2011, a Supplementary to Baseline Water Quality Monitoring Report Review Action and Limit Levels (Revision 1.0) has been provided to EPD by ER in February 2011 in according to Sections 4.92 and 10.7 of EM&A Manual. This report in Revision 1.1 has been provided on 26 April 2011 in response to EPD's comments dated 1 April 2011. This report presents the methodology for enlargement baseline database and the review and determination of the Action and Limit Levels in dry and wet seasons.
- 5.4.2. On the basis of this Supplementary to Baseline Water Quality Monitoring Report, the maximum SS levels in the establishment of larger baseline database will be applied and acted as the upper bound of natural variation levels for the comparison with SS results in reporting quarter. The upper bound of natural variation levels are shown in **Table 5.4**. The graphic presentation of water quality results with respect to local variation is shown in **Appendix 5.3**.

Table 5.4 Upper Bound of Natural Variation Levels at Water Monitoring Stations

Upper Bound of Natural Variation Levels (mg/L)	WSD9	WSD10	WSD15	WSD17	WSD19	WSD21
Dry Season	12.0	19.0	14.0	16.0	18.0	15.0
Wet Season	15.1	21.2	22.7	17.9	17.1	18.8

- 5.4.3. According to the graphic presentation, all SS results were well within the upper bound of natural variation levels. It definitely concluded that these exceedances were not related to the Project works.
- 5.4.4. Based on the graphic presentation and the trend description of the SS levels in <u>Appendix 4.2</u>, conclusion of the water quality surveillance can be draw as follows:
  - SS level of MP is lower than SP1 generally;
  - When the WSD intakes were located at upstream of the Project, it found that SS level
    was occasionally higher than the control points and sampling points near dredging area.
    Thus, uncertain interference of water quality was apparently interfering in the vicinity of
    intakes frequently;
  - For WSD intakes located at downstream of the Project, a higher SS level than the sampling points MP and/or control points were recorded. The trend in the projections indicated that no significant rising of SS in the projection from the dredging area to the control points and the WSD pumping stations.



- Besides, the distance between the WSD intakes and the SP1 are at least more than 1km, the water quality impact was unlikely to cause impact to the WSD intakes.
- 5.4.5. With reference to the upper bound of natural variation levels and water quality surveillance conducting in reporting period, it shows no fluctuation over the upper bound and hence this further supports such exceedances are not caused by dredging activities.

#### Summary of Investigation

- 5.4.6. To summarize, it was found in this reporting period that:
  - SS exceedances were located at upstream of the Project site and no rising SS level in downstream across the Victoria Harbour after passing the project location. It definitely concluded that these exceedances were not related to the Project works.
  - No fluctuation over the upper bound of natural variation levels and water quality surveillance conducting was observed and this further support such exceedances are not caused by dredging activities.
- 5.4.7. Since the investigations found that the exceedances recorded in the reporting quarter were not related to the Project, it was concluded that all necessary steps under Event and Action Plan had been taken. The details of Event and Action Plans and Notification of Exceedance summarizing the finding of investigation, possible causes can be referred to the Monthly EM&A Reports.



#### 5.5. Site Audit

5.5.1. There was no non-compliance from the site audits in the reporting period. During environmental site inspections conducted during the reporting quarter, no particular finding was obtained on the dredging works during the site inspections.

# 5.6. Summary of action taken in the event of and follow-up on non-compliance

5.6.1. Since all exceedances recorded were not project-related, follow-up mitigation measures were therefore not required.

# 6. COMPLAINTS, NOTIFICATION OF SUMMONS AND PROSECUTION

6.0.1. In the reporting quarter, no complaints, notification of summons or prosecution was received in the reporting period. Cumulative statistic on complaints and successful prosecutions are summarized in *Table 6.1*, *Table 6.2* and *Table 6.3* respectively.

Table 6.1 Environmental Complaints Log

Complaint Log No.		Received From and Received By	Nature of Complaint	Date Investigated	Outcome	Date of Reply
NIL	-	-	-	-	-	-

Table 6.2 Cumulative Statistics on Complaints

Environmental Parameters	Cumulative No. Brought Forward	No. of Complaints This Month	Cumulative No. Project-to-Date
Air	0	0	0
Noise	0	0	0
Water	0	0	0
Waste	0	0	0
Total	0	0	0

Table 6.3 Cumulative Statistics on Successful Prosecutions

Environmental Parameters	Cumulative No. Brought Forward	No. of Successful Prosecutions this month (Offence Date)	Cumulative No. Project-to-Date
Air	0	0	0
Noise	0	0	0
Water	0	0	0
Waste	0	0	0
Total	0	0	0




# 7. CONCLUSION

- 7.0.1. The EM&A programme was carried out in accordance with the EM&A Manual requirements, minor alterations to the programme proposed were made in response to changing circumstances.
- 7.0.2. Occasional action and limit level exceedances of SS concentration were recorded in the reporting period. Investigation found that all exceedances were located in the upstream of the Project.
- 7.0.3. Investigations on the recorded upstream exceedances revealed that there were no significant rising up trend of SS levels across the Victoria Harbour after passing the project location. It concluded that no adverse water quality impact was arising from the Project works.
- 7.0.4. With reference to the upper bound of natural variation levels and water quality surveillance conducting in reporting period, it shows no fluctuation over the upper bound and hence this further supports such exceedances are not caused by dredging activities.
- 7.0.5. Noise monitoring was not necessary in the reporting period.
- 7.0.6. The construction programmes in reporting quarter are provided in *Appendix 7.1*.

Figure 2.1


General Layout

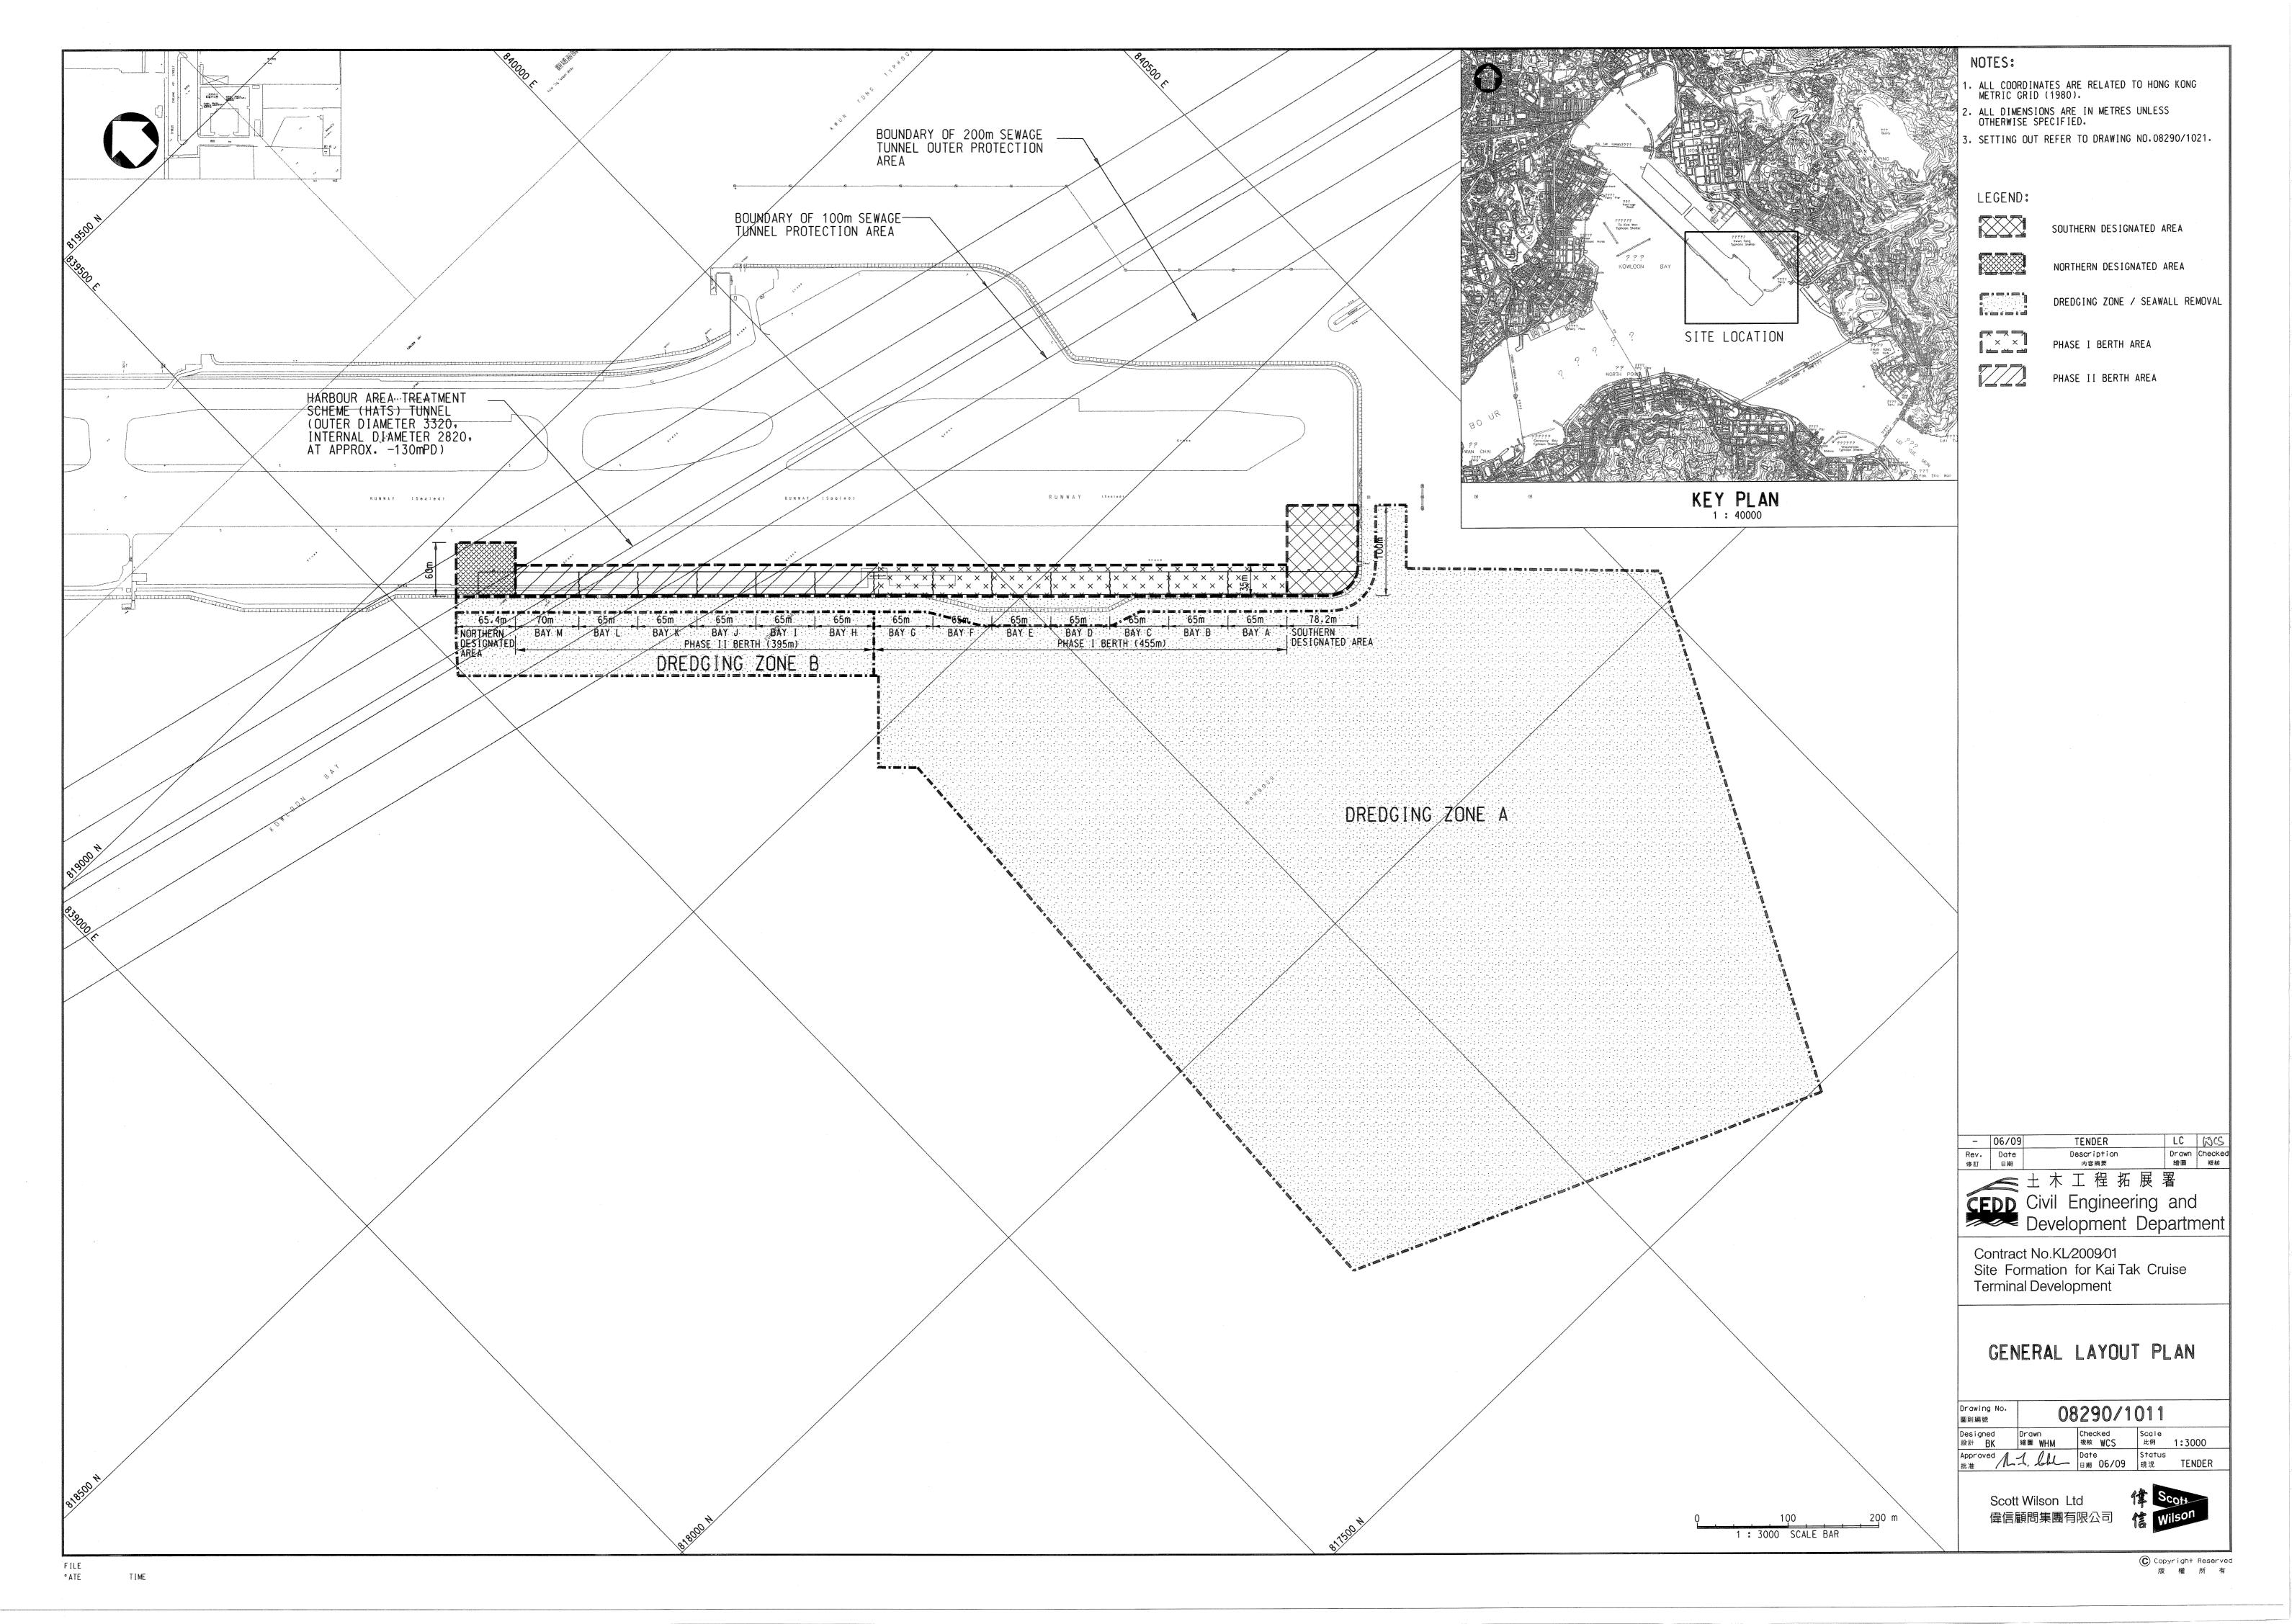

# Figure 2.2


**Project Organization Chart** 


# **Project Organization Chart**

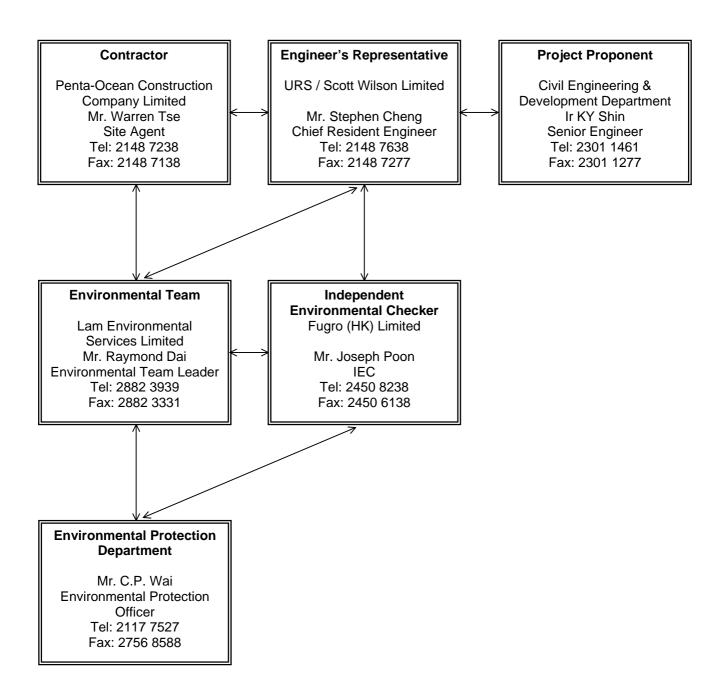

# Figure 3.1

# Layout of Environmental Monitoring Stations

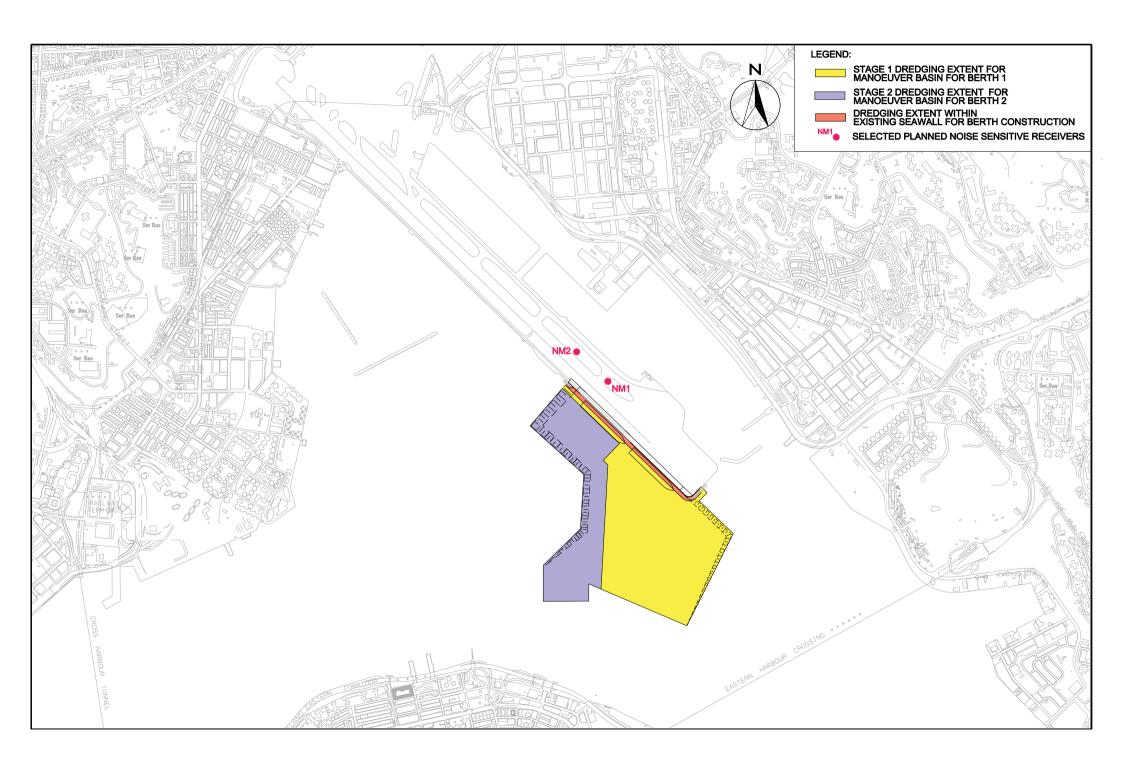

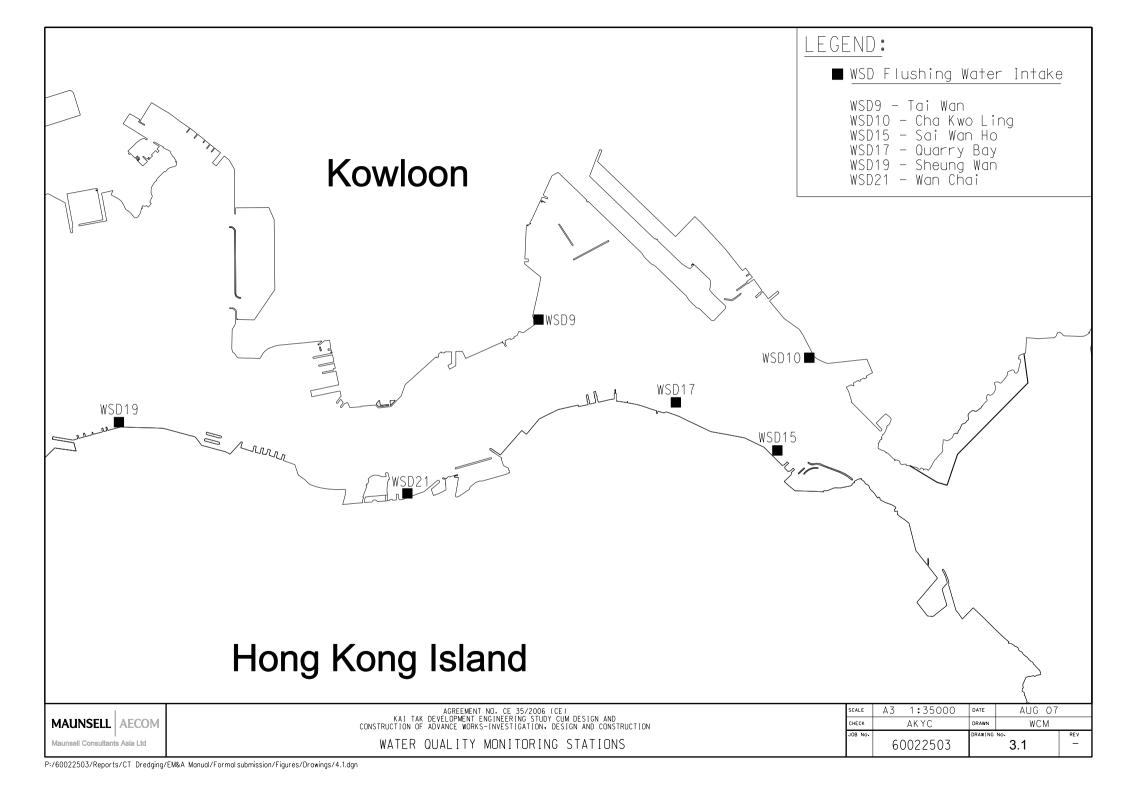

# Figure 4.1


Layout of Monitoring Stations for Water Quality Surveillance System





2. Set A (4 sampling stations), the water quality monitoring works shall be taken at the Control Points (i.e. C1 to C4). Set B (3 sampling stations), the water quality monitoring works shall be taken at approximate 100m outside the silt curtain (i.e. C5 to C7) which the locations shall be changed from time to time to follow the movement of silt curtain.

- 3. The water quality monitoring works shall be carried out during the dredging period.
- 4. The water quality monitoring works shall be carried out at a frequency to be agreed by the Engineer. The date and time of monitoring should be in line with the impact water quality monitoring shedule under the EMBA manual. Each sampling event shall be carried out at 3 depth (i.e. 1m below the surface, mid depth, and 1m above the seabed) of the water column at each location. Duplicate in-situ measurements and water sampling shall be carried out in each sampling event. For selection of tides for in-situ measurement and water sampling, tidal range of individual flood and ebb tides shall not less than 0.5m. The schedule of water quality monitoring shall be reviewed by the Engineer and the Independent Environmental Checker (IEC) depending on whether the water quality monitoring results could indicate any trend of water quality for determination of trigger/action level or whether there is a ad-hoc requirement (e.g. change of working methods, compaints, etc.). The Contractor shall carry out the works according to the revised schedule if instructed by the Engineer.
- 5. As the key parameters, turbidity shall be measured in situ whereas Suspended Solids (SS) shall be determined by laboratory. Analysis of SS level shall be carried out in a HOKLA'S or other international accredited laboratory. Sufficient water samples of not less than 1 liter shall be collected at the monitoring stations for carrying out the laboratory SS determinations.
- Requirements on the monitoring equipments and calibration shall be referred to Paragraph 4.7 "Monitoring Equipment" of the Environmental Monitoring and Audit Manual for the Dredging Works for Proposed Cruise Terminal at Kai Tak.
- 7. Laboratory analysis of the sampling data shall be carried out in a HOKLAS or other international accredited laboratory and follow the requirements as stated in Paragraph 4.8 "Laboratory Measurement/Analysis" of the Environmental Monitoring and Audit Manual for the Dredging Works for Proposed Cruise Terminal at Kal Tak. Monitoring data together with the report shall be reported to the Engineer and the IEC on monthly basis.
- 8. Other relevant data shall also be recorded including monitoring location/position, time, water depth, sampling depth, water temperature, tidal stages, weather conditions and any special phenomena or work underway nearby.

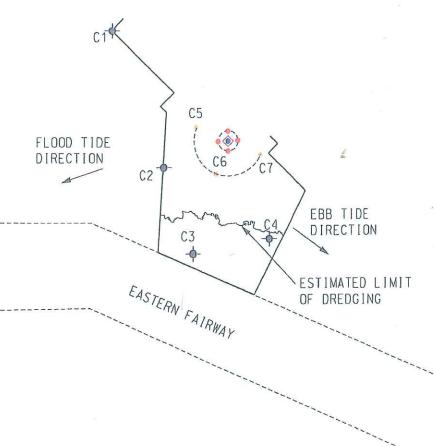

LEGEND:

- SILT CURTAIN (20m x 20m )
- SAMPLING POINT
  INSIDE SILT CURTAIN
  (CONTRACTOR'S PROPOSED SAMPLING
  POINT TO MONITOR EFFECTIVENESS
  OF SILT CURTAINS)
- SAMPLING POINT AT ABOUT 10m
  OUTSIDE SILT CURTANN
  (CONTRACTOR'S PROPOSED SAMPLING
  POINT TO MONITOR EFFECTIVENESS
  OF SILT CURTANNS)
- SAMPLING POINT
  AS CONTROL POINT (CI TO C4)
  (ADDITIONAL)
- SAMPLING POINT AS CONTROL POINT (C5 TO C7) AT ABOUT 100m AWAY FROM SILT CURTAIN (ADDITIONAL)

# ADDITIONAL WATER QUALITY MONITORING STATIONS

COORDINATE	NORTH	EAST		
C1 -	818867.763	839495.740		
C5	818152.875	839775.604		
C3	817702.158	839931.601		
C4	817780.765	840334.093		
C5	POSITIONS CHANGE			
C6				
C7	WITH SILT CURTAIN			

--- SITE BOUNDARY

**Control Copy** 

No. 35



BY: 00/967 (34/879) 40. \$5

B	09/10	REVISION AS SHOWN	EW	R.
A	07/10	REMSION AS SHOWN	JY	SC
Selfa	Date	Reriaion	Grava	Crecked


CEDD CONTRACT KL/2009/01 SITE FORMATION FOR KN TAX CRUISE TERNINAL DEVELOPMENT


WATER QUALITY SURVEILLANCE SYSYEM


SKETCH NO.		(CEDDKL/200901)SK0067B				
DATE	0640	DRAWN	JY	SCHE		
CHECKEO	AT	APPROVED	SC	1	NTS	
utterto	096 10					

URS SCOTT WILSON LTD
Engineer for the Conduct
ENGINEER'S REPRESENTATIVES OFFICE



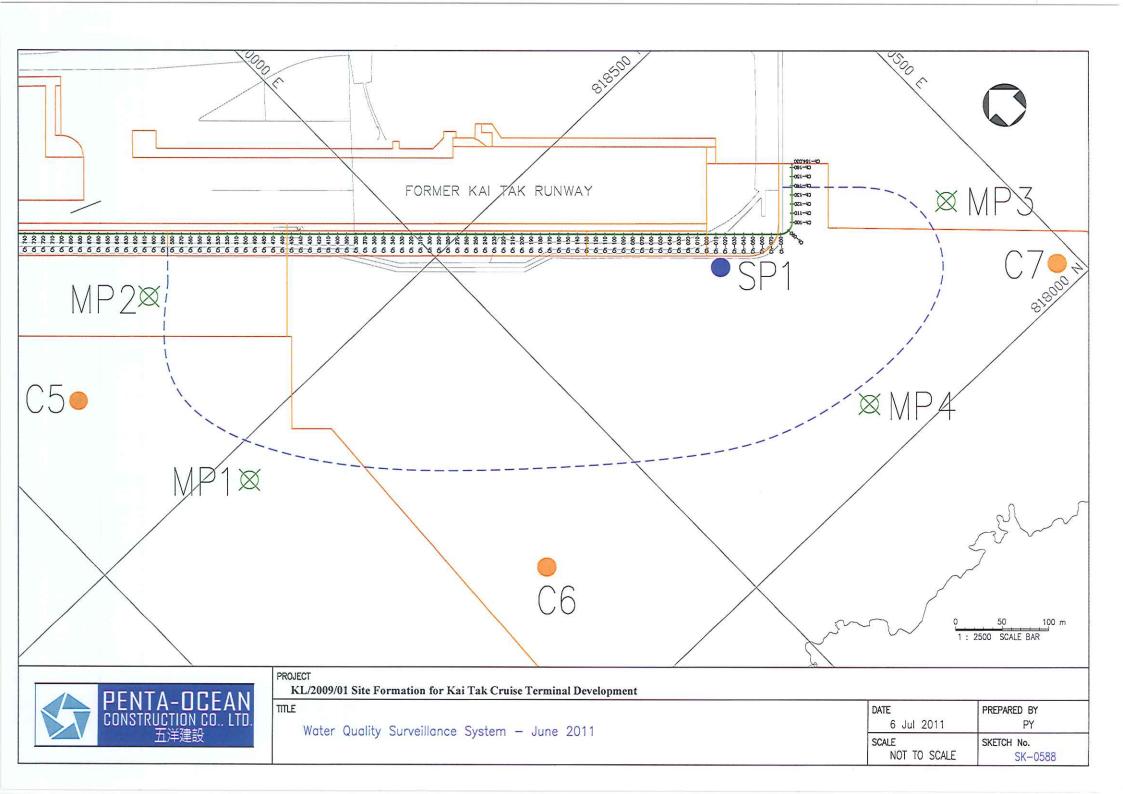

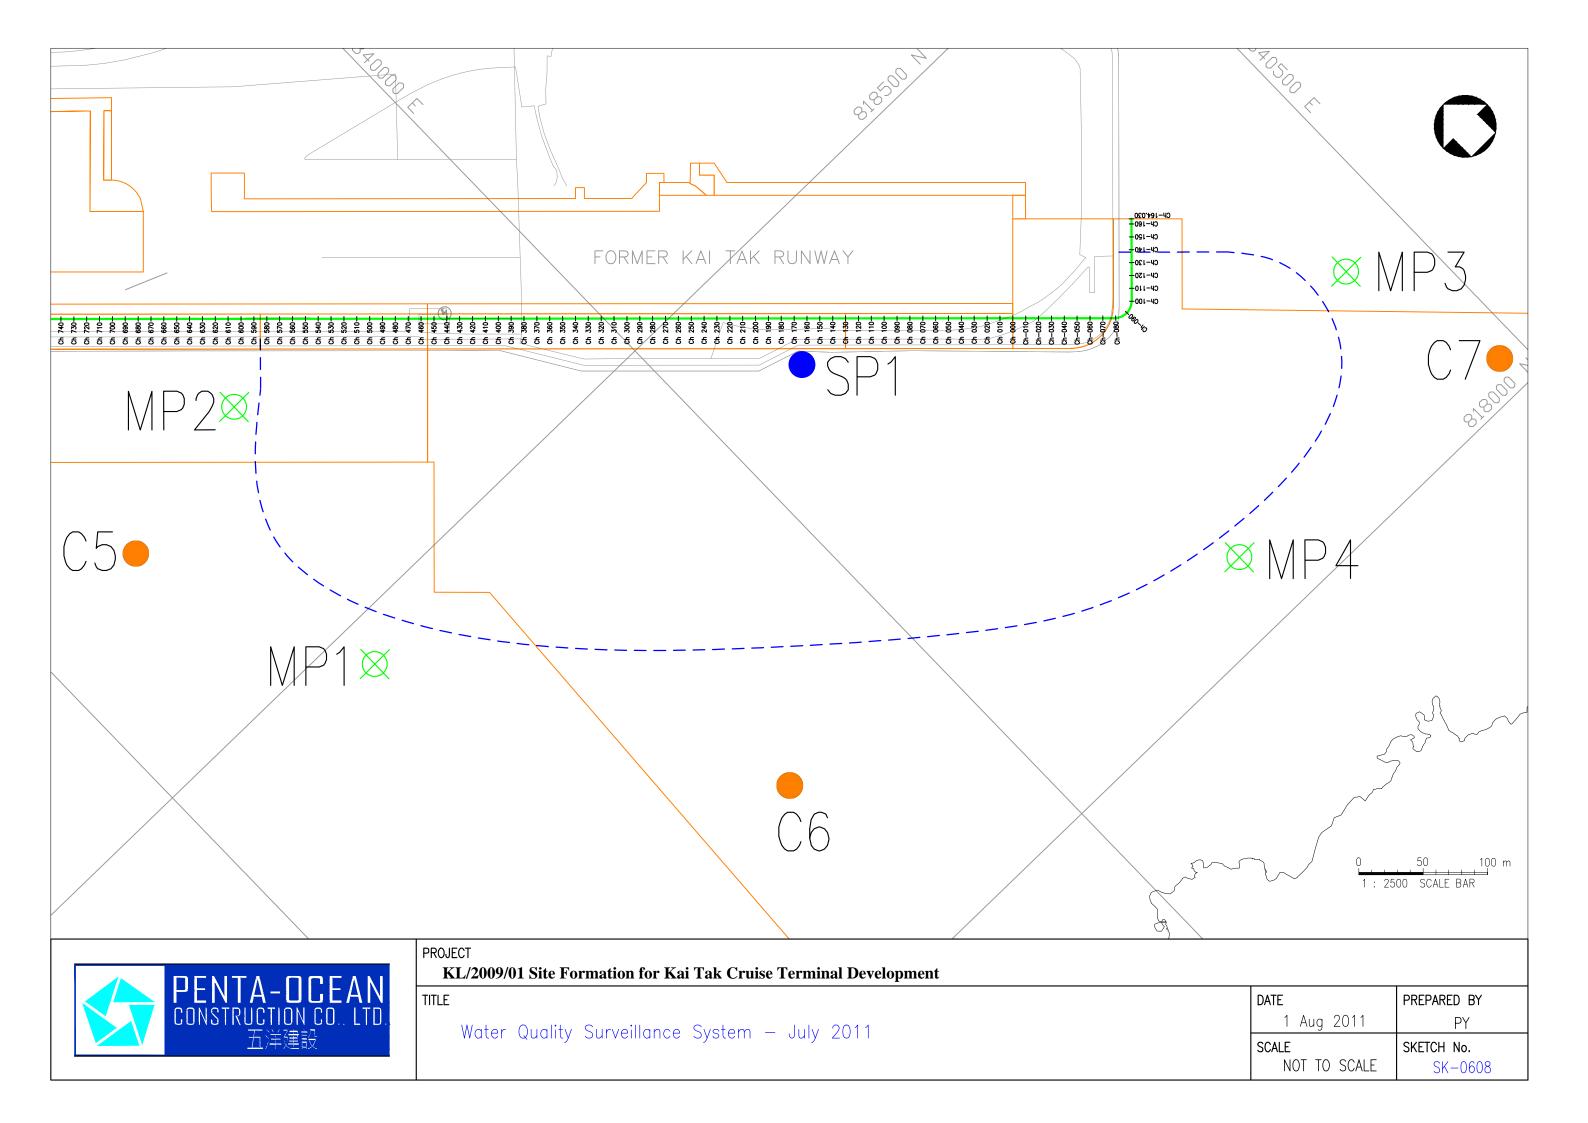

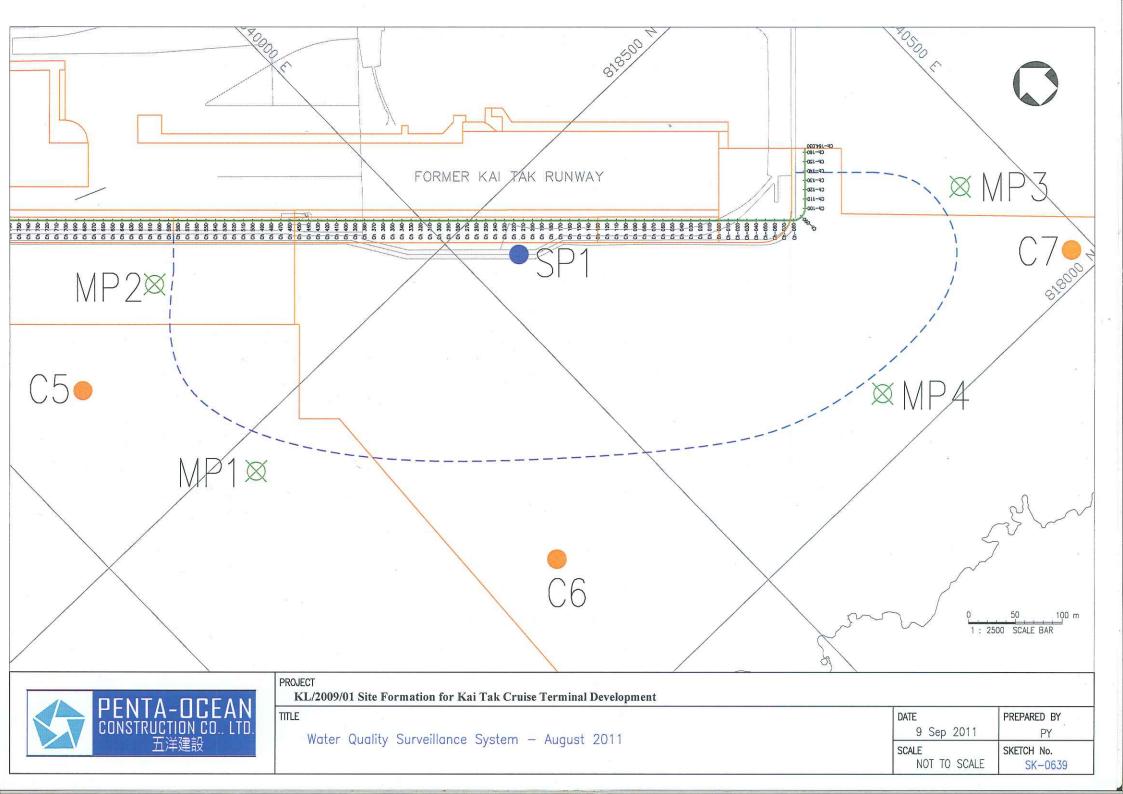

# Appendix 2.1

Implementation Schedule of Environmental Mitigation Measures



EIA Ref#	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Status	Relevant Legislation and Guidelines
S3.6	Requirements of the Air Pollution Control (Construction Dust) Regulation shall be adhered to during the construction period.	Work site / During dredging in construction stage	Contractor for capital dredging	Implemented	Air Pollution Control (Construction Dust) Regulation
S3.6	In order to minimize the potential odour emissions, if any, the dredged sediment placed on barge should be properly covered as far as practicable to minimise the exposed area and hence the potential odour emissions during the transportation of the dredged sediment.	Work site / During dredging in construction stage	Contractor for capital dredging	Implemented	EIAO-TM
S4.8	<ul> <li>Good Site Practices:</li> <li>Only well-maintained plant should be operated on-site and plant should be serviced regularly during the construction program.</li> <li>Mobile plant, if any, should be sited as far away from NSRs as possible.</li> <li>Machines and plant (such as trucks) that may be in intermittent use should be shut down between works periods or should be throttled down to a minimum.</li> <li>Plant known to emit noise strongly in one direction should, wherever possible, be orientated so that the noise is directed away from the nearby NSRs.</li> <li>Material stockpiles and other structures should be effectively utilised, wherever practicable, in screening noise from on-site construction activities.</li> </ul>	Work site / During dredging in construction stage	Contractor for capital dredging	Implemented	NCO EIAO-TM



EIA Ref#	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Status	Relevant Legislation and Guidelines
\$4.9	If there is any planned NSRs within 300m from the work area occupied during the dredging period, an EM&A programme is recommended to be established according to the predicted occurrence of noisy activities. All the recommended mitigation measures for daytime normal working activities should be incorporated into the EM&A programme for implementation during dredging.	Representative NSRs at the former Kai Tak Airport runway / Upon formal occupation	N/A	Not applicable	NCO EIAO-TM
S5.9	<ul> <li>Dredging will be carried out by closed grab dredger to minimize release of sediment and other contaminants during both capital and maintenance dredging.</li> <li>The maximum production rate for dredging from the seabed to provide necessary manoeuvring area would not be more than 4,000m³ per day (and no more than 2 closed grab dredgers) during capital dredging and 2,000m³ per day (and no more than 1 closed grab dredger) during maintenance dredging.</li> <li>The maximum production rate for dredging at or near the seawall area would not be more than 4,000m³ per day for berth construction. No more than two closed grab dredger would be operated at the same time at or near the seawall for berth construction.</li> </ul>	Work site / During dredging in construction stage	Contractor for capital dredging	Implemented	EIAO-TM WPCO
S5.9	Silt curtains should be deployed around the closed grab dredgers used for dredging at and near the existing seawall of the former Kai Tak Airport runway for construction of the cruise berth structures.	Work site / During dredging in construction stage	Contractor for capital dredging	Implemented	EIAO-TM, WPCO



EIA Ref#	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Status	Relevant Legislation and Guidelines
S5.9	Silt screens should be installed at the WSD flushing water intakes at Cha Kwo Ling, Sai Wan Ho, Quarry Bay, Sheung Wan, Wan Chai and Tai Wan for dredging in the manoeuvring basin of the first berth during the capital dredging.	Seawater intakes in Victoria Harbour/ During the construction of cruise terminal	Contractor for capital dredging	Implemented	EIAO-TM, WPCO
S5.9	Silt screens should be installed at the WSD flushing water intakes at Cha Kwo Ling, Quarry Bay and Tai Wan for dredging in the manoeuvring basin of the second berth during the capital dredging.	Seawater intakes in Victoria Harbour / During the construction of cruise terminal	Contractor for capital dredging	Implemented	EIAO-TM, WPCO
S5.9	If the opening has been introduced at the northern runway, silt screens should also be installed at the WSD flushing water intake at Sai Wan Ho, Sheung Wan and Wan Chai for dredging in the manoeuvring basin of the second berth during the capital dredging.	Seawater intake at Sai Wan Ho, Sheung Wan and Wan Chai / During the construction of cruise terminal	Contractor for capital dredging	Implemented	EIAO-TM, WPCO



EIA Ref#	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Status	Relevant Legislation and Guidelines
S5.9	Other good site practices that should be undertaken during dredging include:  • all vessels should be sized so that adequate clearance is maintained between vessels and the seabed in all tide conditions, to ensure that undue turbidity is not generated by turbulence from vessel movement or propeller wash;  • all barges / dredgers should be fitted with tight fitting seals to their bottom openings to prevent leakage of material;  • construction activities should not cause foam, oil, grease, scum, litter or other objectionable matter to be present on the water within the site or dumping grounds;  • barges or hoppers should not be filled to a level that will cause the overflow of materials or polluted water during loading or transportation.	Work site and adjacent waters / During dredging in construction stage	Contractor for capital dredging	Implemented	EIAO, EIAO-TM, WPCO, WDO
S5.9	Appropriate numbers of portable chemical toilets shall be provided by a licensed contractor to serve the construction workers over the construction site. The Contractor shall also be responsible for waste disposal and maintenance practices.	Work site and adjacent waters / During dredging in construction stage	Contractor for capital dredging	Implemented	EIAO-TM, WPCO, WDO



EIA Ref#	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Status	Relevant Legislation and Guidelines
S5.9	Collection and removal of floating refuse should be performed at regular intervals on a daily basis. The contractor should be responsible for keeping the water within the site boundary and the neighbouring water free from rubbish during the dredging works.	Work site and adjacent waters / During dredging in construction stage	Contractor for capital dredging	Implemented	EIAO-TM, WPCO, WDO
S5.9	An environmental monitoring and audit programme should be implemented to verify whether or not impact predictions are representative, and to ensure that all the recommended mitigation measures are implemented properly. If the water quality monitoring data indicate that the proposed dredging works result in unacceptable water quality impacts in the receiving water, appropriate actions should be taken to review the dredging operation and additional measures such as use of frame-type silt curtain, deployment of double silt curtains, slowing down, or rescheduling of works should be implemented as necessary.	6 selected WSD flushing water intakes in Victoria Harbour/ During dredging in construction stage	Environmental Team and verified by Independent Environmental Checker	Implemented	EIAO-TM, WPCO



EIA Ref#	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Status	Relevant Legislation and Guidelines
S5.9	Silt screens are recommended to be deployed at 6 selected WSD flushing water intakes during the capital dredging. The contractor for capital dredging shall demonstrate and ensure that the design of the silt screen will not affect the normal operation of flushing water intake. The contractor shall obtain consensus from all relevant parties, including WSD and Marine Department on the design of the silt screen at each of the six selected flushing water intake points before installation of the silt screen and commencement of the proposed dredging works. As a mitigation measure to avoid the pollutant and refuse entrapment problems and to ensure that the impact monitoring results are representative, regular maintenance of the silt screens and refuse collection should be performed at the monitoring stations at regular intervals on a daily basis. The Contractor should be responsible for keeping the water behind the silt screen free from floating rubbish and debris during the impact monitoring period.	6 selected WSD flushing water intakes in Victoria Harbour/ During dredging in construction stage	Contractor for capital dredging	Implemented	EIAO-TM, WPCO



# # Environmental Protection Measures / Mitigation | Location / Timing | Implementation Agent | Implementation Status | Relevant Legislation

EIA Ref#	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Status	Relevant Legislation and Guidelines
S6.7	Good Site Practices  It is not anticipated that adverse waste management related impacts would arise, provided that good site practices are adhered to. Recommendations for good site practices during the dredging activities include:	Work site / During dredging in construction stage	Contractor for capital dredging	Implemented	EIAO-TM
	Nomination of an approved person, such as a site manager, to be responsible for good site practices, arrangements for collection and effective disposal to an appropriate facility, of all wastes generated at the site.				
	Training of site personnel in proper waste management and chemical waste handling procedures.				
	Provision of sufficient waste disposal points and regular collection for disposal.				
	Appropriate measures to minimise windblown litter and dust during transportation of waste by either covering trucks or by transporting wastes in enclosed containers.				
	A recording system for the amount of wastes generated, recycled and disposed of (including the disposal sites).				
	Segregation and storage of different types of waste in different containers, skips or stockpiles to enhance reuse or recycling of materials and their proper disposal.				



EIA Ref#	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Status	Relevant Legislation and Guidelines
S6.7 (cont.)	<ul> <li>Encourage collection of aluminium cans, PET bottles and paper by providing separate labelled bins to enable these wastes to be segregated from other general refuse generated by the workforce.</li> <li>Any unused chemicals or those with remaining functional capacity shall be recycled.</li> </ul>	Work site / During dredging in construction stage	Contractor for capital dredging	Implemented	EIAO-TM
S6.7	Marine Sediments  The dredged marine sediments would be loaded onto barges and transported to the designated disposal sites allocated by the MFC depending on their level of contamination. Sediment classified as Category L would be suitable for Type 1 — Open Sea Disposal. Contaminated sediment would require either Type 1 — Open Sea Disposal (Dedicated Sites) or Type 2—Confined Marine Disposal and must be dredged and transported with great care in accordance with ETWB TCW No. 34/2002. Subject to the final allocation of the disposal sites by MFC, the dredged contaminated sediment must be effectively isolated from the environment upon final disposal and shall be disposed of at the East Sha Chau Contaminated Mud Pits that are designated for the disposal of contaminated mud in Hong Kong.	Work site / During dredging in construction stage	Contractor for capital dredging	Implemented	ETWB TCW No. 34/2002



EIA Ref#	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Status	Relevant Legislation and Guidelines
S6.7	It will be the responsibility of the Contractor to satisfy the appropriate authorities that the contamination levels of the marine sediment to be dredged have been analysed and recorded. According to the ETWB TCW No. 34/2002, this will involve the submission of a formal Sediment Quality Report to the DEP, prior to the dredging contract being tendered. The contractor for the dredging works shall apply for the allocation of marine sediment disposal sites from all relevant authorities.	Work site / During dredging in construction stage	Contractor for capital dredging	Dumping Permits were issued by EPD	ETWB TCW No. 34/2002
S6.7	<ul> <li>During transportation and disposal of the dredged marine sediments requiring Type 1 and Type 2 disposal, the following measures shall be taken to minimise potential impacts on water quality:</li> <li>Bottom opening of barges shall be fitted with tight fitting seals to prevent leakage of material. Excess material shall be cleaned from the decks and exposed fittings of barges and hopper dredgers before the vessel is moved.</li> <li>Monitoring of the barge loading shall be conducted to ensure that loss of material does not take place during transportation. Transport barges or vessels shall be equipped with automatic self-monitoring devices as specified by the DEP.</li> <li>Barges or hopper barges shall not be filled to a level that would cause the overflow of materials or sediment laden water during loading or transportation.</li> </ul>	Work site / During dredging in construction stage	Contractor for capital dredging	Implemented	WDO; WPCO



EIA Ref#	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Status	Relevant Legislation and Guidelines
S6.7	Chemical Wastes  After use, chemical wastes (for example, cleaning fluids, solvents, lubrication oil and fuel) should be handled according to the Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes. Spent chemicals should be collected by a licensed collector for disposal at the CWTF or other licensed facility in accordance with the Waste Disposal (Chemical Waste) (General) Regulation.	Work site / During dredging in construction stage	Contractor for capital dredging	Implemented	Waste Disposal (Chemical Waste) (General) Regulation; Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes
S6.7	General Refuse General refuse should be stored in enclosed bins or compaction units separate from C&D material. A reputable waste collector should be employed by the contractor to remove general refuse from the site, separately from C&D material. An enclosed and covered area is preferred to reduce the occurrence of 'wind blown' light material.	Work site / During dredging in construction stage	Contractor for capital dredging	Implemented	WDO, WPCO



EIA Ref#	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Status	Relevant Legislation and Guidelines
S6.7	Construction and Demolition Material  It is recommended that the extent of dredging of the existing seawall should be kept to a minimum in the detailed design of the new cruise terminal to minimize generation of C&D material. Mitigation measures and good site practices should be incorporated in the contract document to control potential environmental impact from handling and transportation of C&D material. The mitigation measures include:  • Where it is unavoidable to have transient stockpiles of C&D material within the Project work site pending collection for disposal, the transient stockpiles shall be located away from waterfront or storm drains as far as possible.  • Open stockpiles of construction materials or construction wastes on-site should be covered with tarpaulin or similar fabric.  • Skip hoist for material transport should be totally enclosed by impervious sheeting.  • Every vehicle should be washed to remove any dusty materials from its body and wheels before leaving a construction site.  • The area where vehicle washing takes place and the section of the road between the washing facilities and the exit point should be paved with	Work site / During the construction period	Contractor for capital dredging	Implemented	ETWB TCW No. 33/2002, 31/2004, 19/2005



EIA Ref#	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Status	Relevant Legislation and Guidelines
S6.7 (cont.)	<ul> <li>The load of dusty materials carried by vehicle leaving a construction site should be covered entirely by clean impervious sheeting to ensure dust materials do not leak from the vehicle.</li> <li>All dusty materials should be sprayed with</li> </ul>	Work site / During the construction period	Contractor for capital dredging	Implemented	ETWB TCW No. 33/2002, 31/2004, 19/2005
	water prior to any loading, unloading or transfer operation so as to maintain the dusty materials wet.				
	The height from which excavated materials are dropped should be controlled to a minimum practical height to limit fugitive dust generation from unloading.				
S6.7	When delivering inert C&D material to public fill reception facilities, the material shall consist entirely of inert construction waste and of size less than 250mm or other sizes as agreed with the Secretary of the Public Fill Committee. In order to monitor the disposal of the surplus C&D material at the designed public fill reception facility and to control fly tipping, a trip-ticket system should be included as one of the contractual requirements and implemented by the Contractor under the Waste Management Plan certified by the Environmental Team and verified by the Independent Environmental Checker who should be responsible for auditing the results of the system.	Work site / During the construction period	Contractor for capital dredging, Engineer, Environmental Team and Independent Environmental Checker	Not applicable	ETWB TCW No. 31/2004



EIA Ref#	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Status	Relevant Legislation and Guidelines
S7.8	The dredging activities of the proposed cruise terminal should ensure that disturbance to the existing seawall masonry outside the Project boundary should be avoided as far as practicable.	Work site/ During construction of cruise terminal	Contractor for capital dredging as per CEDD's advice	Implemented	Antiquities and Monuments Ordinance EIAO, EIAO-TM Guidance Notes on Assessment of Impact on Sites of Cultural Heritage in Environmental Impact Assessment Studies (GN-CH) Hong Kong Planning Standards and Guidelines (HKPSG)
S7.10, App. 7.1	It is recommended that the dredged spoil should be monitored for the presence of archaeological material.  Guidelines for the monitoring brief have been prepared in consultation with the AMO. A qualified marine archaeologist needs to be on standby to provide specialist advice, if required, but the monitoring can be carried out by a member of staff on the dredging barge.	Work site / during dredging in construction stage	Contractor for capital dredging, Environmental Team	Implemented	Antiquities and Monuments Ordinance EIAO, EIAO-TM GN-CH HKPSG Marine Archaeological Investigation Guidelines



EIA Ref#	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Status	Relevant Legislation and Guidelines
8.7	Translocate those existing coral colonies attached on boulders that are manually movable by a diver underwater (possibly longest dimension of less than 50cm) located within the hard substrata sea area within the dredging site as far as practicable prior to the commencement of the capital dredging activities. The entire translocation exercise include the preparation of a detailed translocation plan, the pretranslocation coral survey, the coral translocation, and the quarterly post-translocation monitoring for one year. Pre-translocation survey would be focused on identifying and mapping of coral colonies that would be directly impacted by the proposed dredging and investigating the translocation feasibility of these coral colonies. A detailed translocation plan (including pretranslocation coral survey, translocation methodology and monitoring of transplanted corals) should be prepared during the detailed design stage of the Project which, together with the ecologist involved in coral translocation, should be approved by AFCD prior to commencement of the translocation exercises. The proposed relocation of the coral colonies should not affect any private/public marine rights at the recipient site.	Along the section of the former Kai Tak Airport runway that will be directed affected by the cruise terminal construction / During detailed design stage	Other ET specifically employed for coral translocation works	Final Detailed Coral Translocation Plan was approved by EPD in letter ref. (18) in EP2/K19/C/19 Pt.5 dated 5 June 2009. Form 5 was submitted under CEDD's memo ref. (6) in KD 2/31/4 Pt.3 dated 10 June 2009 regarding minor alteration of the position of the coral recipient site. Coral Translocation Report was submitted in Scott Wilson letter ref. 08290/325723 dated 2 July 2009. Post-translocation report shall be referred to the submissions by another ET specifically employed for coral translocation works.	EIAO-TM





EIA Ref#	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Status	Relevant Legislation and Guidelines
S8.7	New seawalls at the berth structure of the cruise terminal shall be constructed in order to provide large area of hard substrata for settlement and recruitment of intertidal and subtidal assemblages similar to those previously recorded from existing habitats.	The section of the former Kai Tak Airport runway that will be directed affected by the cruise terminal construction / During detailed design stage	To be confirmed at later stage	To be confirmed at later stage	EIAO-TM
9.6	No fisheries-specific mitigation measures would be required.	-	Not applicable	Not applicable	-

## Appendix 3.1

**Action and Limit Levels** 

## **Action and Limit Levels**

## Action and Limit Levels for Noise Monitoring

Time Period	Action Level	Limit Level
07:00 – 19:00 hours on normal weekdays	When one documented complaint is received from any one of the sensitive receivers	75 dB(A)

Remarks: No noise monitoring was conducted due to no planned noise sensitive receivers (NSRs) occupied within 300m from the works area of this Project during the dredging works.

## Action and Limit Levels for Water Monitoring

Parameters	Action L	.evel		Limit Le	vel	
Turbidity in NTU		All Seaso	on_		All Seaso	<u>on</u>
	WSD9	5.67	•	WSD9	12.27	•
	WSD10	6.26	i	WSD10	10.47	•
	WSD15	8.15	i	WSD15	14.41	
	WSD17	11.60	1	WSD17	16.91	
	WSD21	9.11		WSD21	15.38	}
	WSD19	13.09	1	WSD19	15.34	
Suspended Solids		Dry Season	Wet Season		Dry Season	Wet Season
(SS) in mg/L	WSD9	6.9	9.7	WSD9	7.8	10.9
	WSD10	7.7	9.1	WSD10	10.3	12.2
	WSD15	7.8	13.5	WSD15	8.4	14.5
	WSD17	9.5	11.2	WSD17	13.7	16.2
	WSD21	13.3	17.1	WSD21	13.9	17.8
	WSD19	16.3	15.1	WSD19	17.0	15.7


Remarks:


Wet season is the period from April to September. Dry season is the period from October to March.

## Appendix 4.1

**Graphical Presentation of Water Quality Monitoring Results** 


# Graphic Presentation of Water Quality Result of WSD9 - Tai Wan

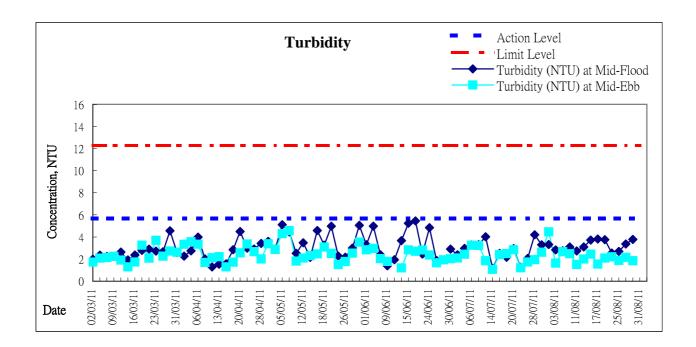


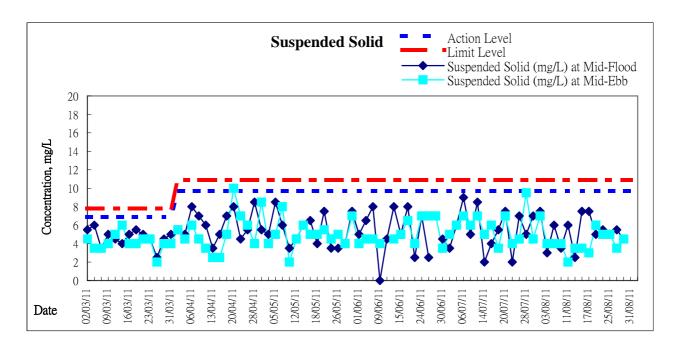

#### Remarks:


# Graphic Presentation of Water Quality Result of WSD10 - Cha Kwo Ling

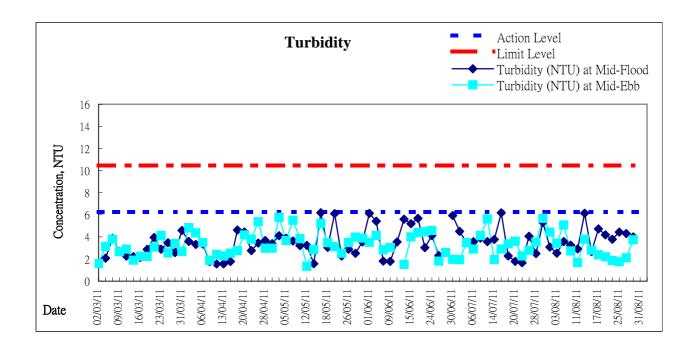


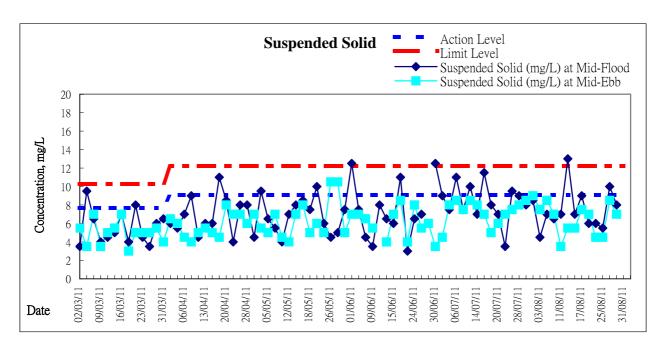

#### Remarks:


# Graphic Presentation of Water Quality Result of WSD15 - Sai Wan Ho

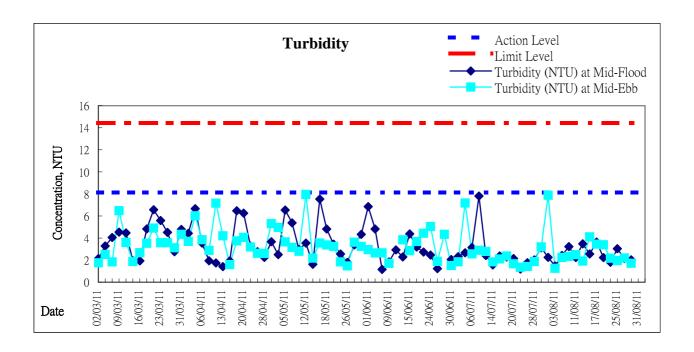


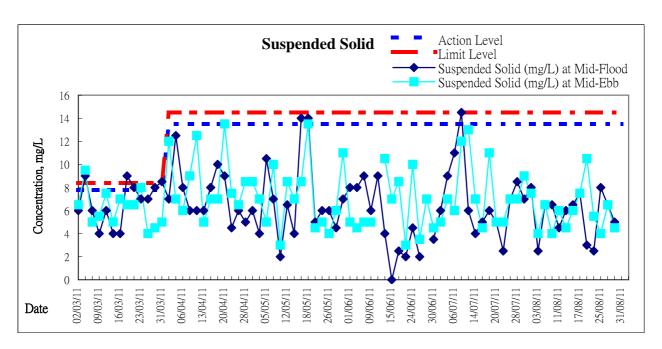

#### Remarks:


# Graphic Presentation of Water Quality Result of WSD17 - Quarry Bay

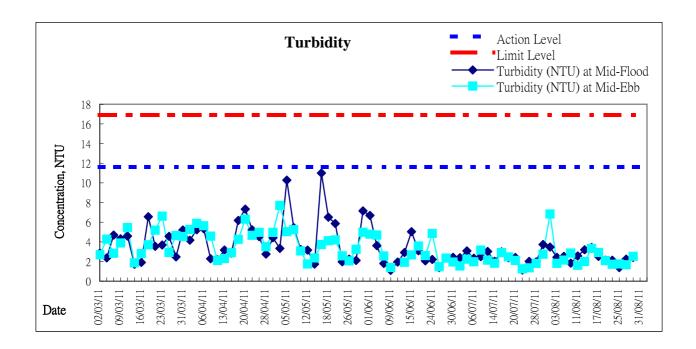


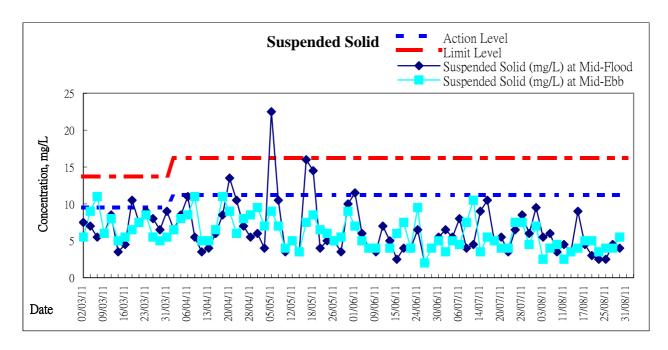

#### Remarks:


# Graphic Presentation of Water Quality Result of WSD21 - Wan Chai

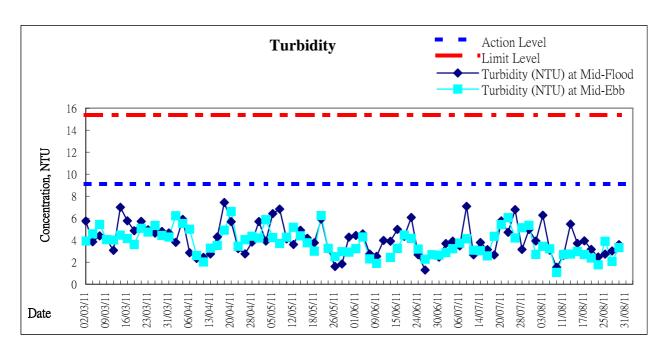


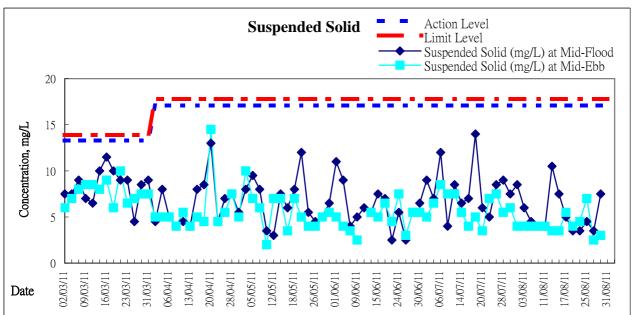

#### Remarks:

# Graphic Presentation of Water Quality Result of WSD19 - Sheung Wan

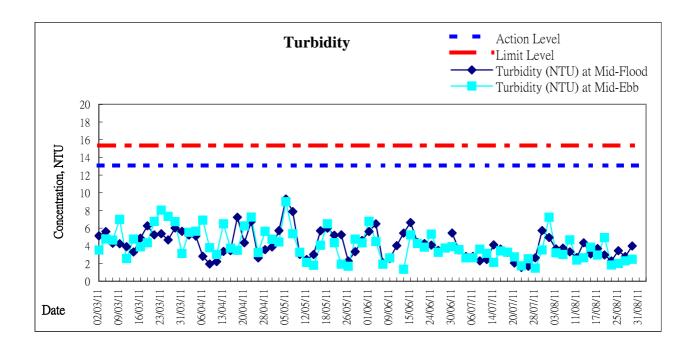

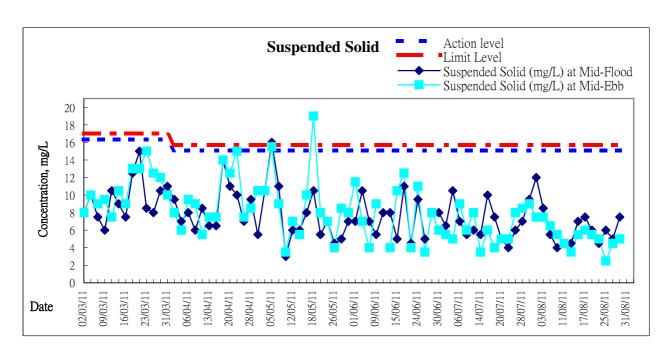

#### Remarks:


# Appendix 4.2


Graphical Presentation of Water Quality Surveillance


# Water Quality Surveillance System Monitoring Results - 9 June 2011 (Flood Tide)

Мо	nitoring Location	Turbidity in	Compare to	Suspended	Compare to
		NTU	Trigger Level	Solids in mg/L	Trigger Level
CD1	1m below the surface	8.51	N/A	16	N/A
SP1	mid depth	5.83	N/A	14	N/A
	1m above the seabed	8.97	N/A	23	N/A
	1m below the surface	0.87	N/A	7	N/A
MP1	mid depth	1.40	N/A	6	N/A
	1m above the seabed	2.22	N/A	6	N/A
	1m below the surface	1.05	N/A	4	N/A
MP2	mid depth	2.30	N/A	5	N/A
	1m above the seabed	3.22	N/A	8	N/A
	1m below the surface	1.40	N/A	3	N/A
MP3	mid depth	1.21	N/A	3	N/A
	1m above the seabed	2.61	N/A	5	N/A
	1m below the surface	1.83	N/A	3	N/A
MP4	mid depth	1.35	N/A	6	N/A
	1m above the seabed	2.03	N/A	4	N/A
	1m below the surface	0.97	Lower	6	Lower
C1	mid depth	0.90	Lower	2	Lower
	1m above the seabed	1.37	Lower	5	Lower
	1m below the surface	1.08	Lower	2	Lower
C2	mid depth	1.60	Lower	3	Lower
	1m above the seabed	1.15	Lower	3	Lower
	1m below the surface	1.70	Lower	7	Lower
C3	mid depth	1.38	Lower	3	Lower
	1m above the seabed	3.25	Lower	5	Lower
	1m below the surface	1.60	Lower	5	Lower
C4	mid depth	1.14	Lower	4	Lower
	1m above the seabed	2.43	Lower	4	Lower
	1m below the surface	0.67	N/A	3	N/A
C5	mid depth	0.69	N/A	<2	N/A
	1m above the seabed	1.47	N/A	<2	N/A
	1m below the surface	1.00	N/A	3	N/A
C6	mid depth	1.03	N/A	4	N/A
	1m above the seabed	3.56	N/A	10	N/A
	1m below the surface	1.37	N/A	3	N/A
C7	mid depth	1.16	N/A	9	N/A
CI-ESCATA	1m above the seabed	2.71	N/A	7	N/A

Control Point	Trigger Level for Turbidity in NTU for All Season	Trigger Level for SS in mg/L for Wet Season
C1	12.3 for Flood Tide	
C2	12.3 for Flood Tide	10.5
C3	16.9	18.5
C4	10.5 for Ebb Tide	

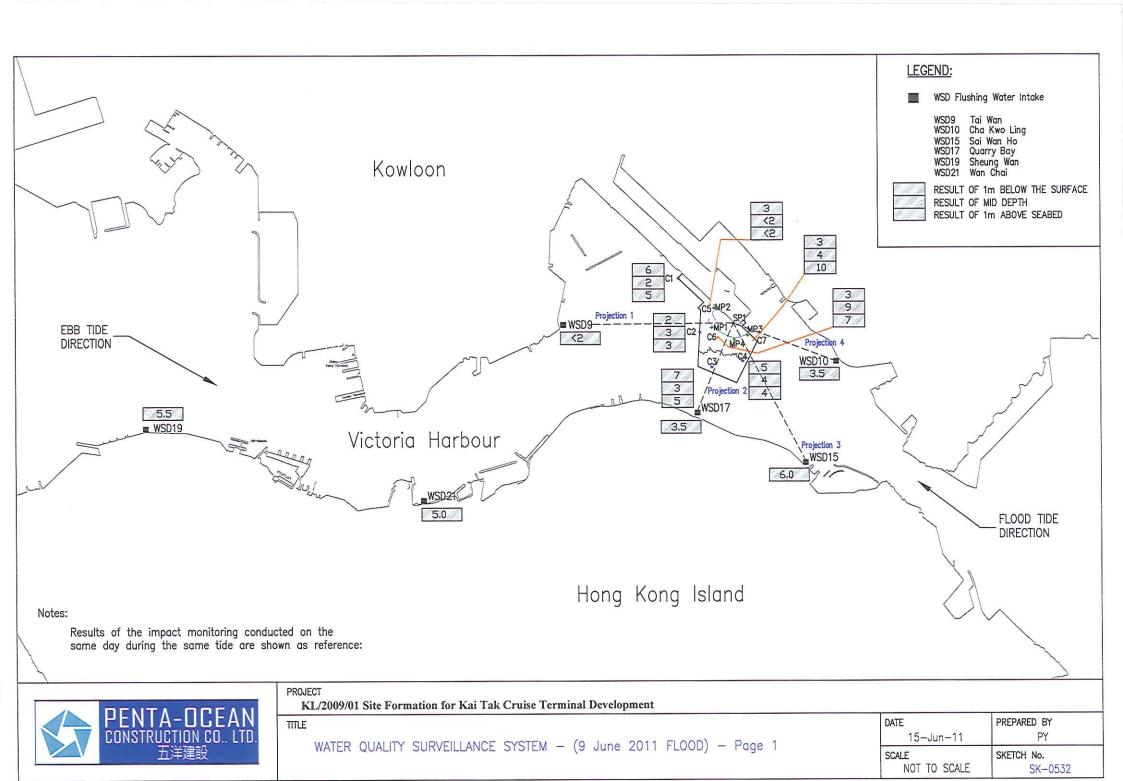

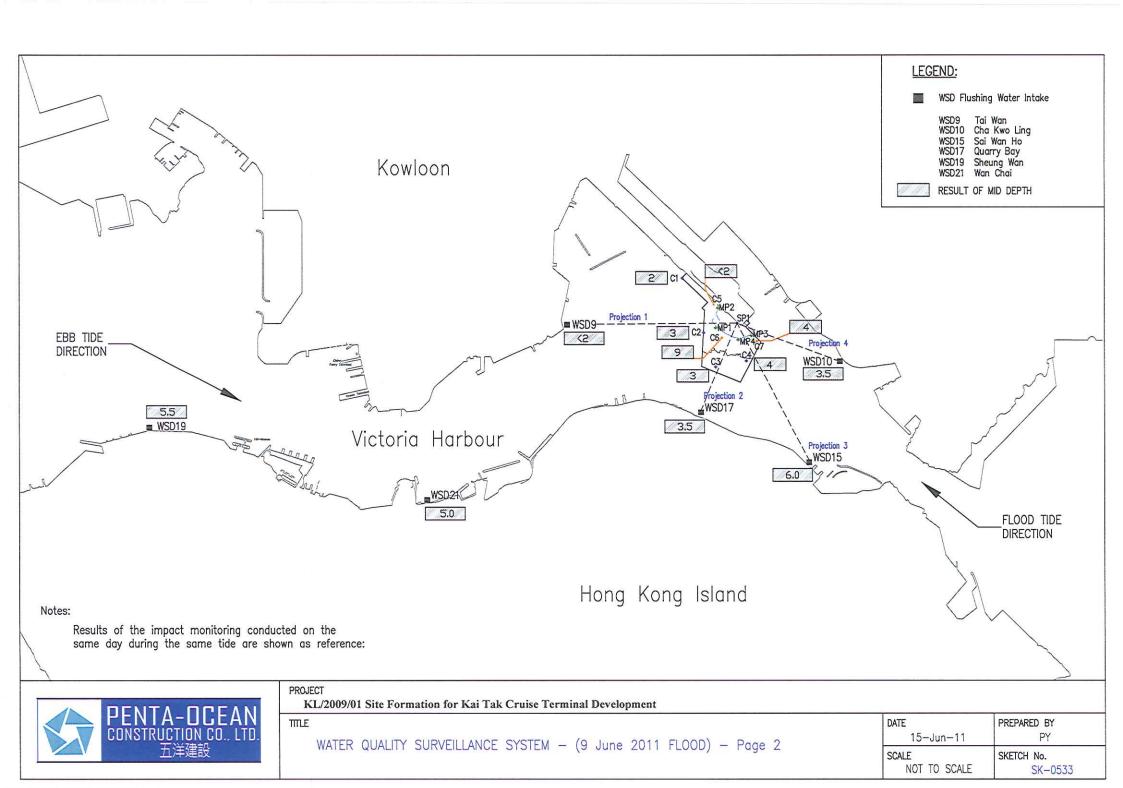


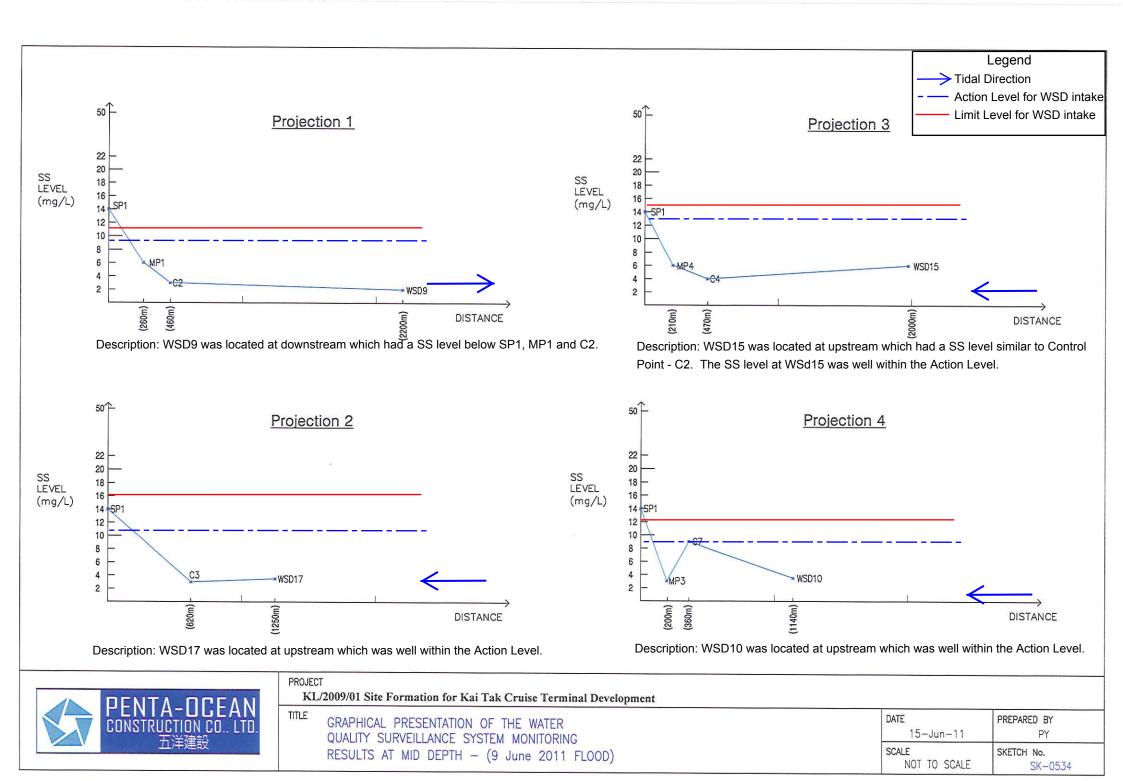



# Water Quality Surveillance System Monitoring Results - 21 June 2011 (Ebb Tide)


Mo	nitoring Location	Turbidity in	Compare to	Suspended	Compare to
1110		NTU	Trigger Level	Solids in mg/L	Trigger Level
	1m below the surface	4.79	N/A	5	N/A
SP1	mid depth	7.60	N/A	14	N/A
	1m above the seabed	72.50	N/A	225	N/A
	1m below the surface	3.28	N/A	8	N/A
MP1	mid depth	3.18	N/A	6	N/A
	1m above the seabed	2.28	N/A	4	N/A
	1m below the surface	3.09	N/A	5	N/A
MP2	mid depth	2.89	N/A	5	N/A
	1m above the seabed	2.92	N/A	4	N/A
	1m below the surface	3.41	N/A	6	N/A
MP3	mid depth	4.15	N/A	7	N/A
	1m above the seabed	4.09	N/A	12	N/A
	1m below the surface	2.80	N/A	5	N/A
MP4	mid depth	3.21	N/A	5	N/A
	1m above the seabed	2.68	N/A	5	N/A
	1m below the surface	2.71	Lower	6	Lower
C1	mid depth	2.88	Lower	5	Lower
	1m above the seabed	2.92	Lower	5	Lower
	1m below the surface	3.44	Lower	5	Lower
C2	mid depth	3.47	Lower	6	Lower
	1m above the seabed	3.09	Lower	5	Lower
	1m below the surface	2.84	Lower	5	Lower
C3	mid depth	2.78	Lower	6	Lower
	1m above the seabed	2.66	Lower	4	Lower
	1m below the surface	2.51	Lower	5	Lower
C4	mid depth	2.97	Lower	5	Lower
	1m above the seabed	3.43	Lower	4	Lower
	1m below the surface	2.44	N/A	4	N/A
C5	mid depth	2.77	N/A	4	N/A
	1m above the seabed	3.42	N/A	4	N/A
	1m below the surface	2.55	N/A	5	N/A
C6	mid depth	2.83	N/A	5	N/A
E4.5	1m above the seabed	2.36	N/A	5	N/A
	1m below the surface	4.27	N/A	5	N/A
C7	mid depth	2.57	N/A	5	N/A
	1m above the seabed	2.13	N/A	5	N/A

Control Point	Trigger Level for Turbidity in NTU for All Season	Trigger Level for SS in mg/L for Wet Season
C1	12.3 for Flood Tide	
C2	12.3 for Flood Tide	10.5
C3	16.9	18.5
C4	10.5 for Ebb Tide	

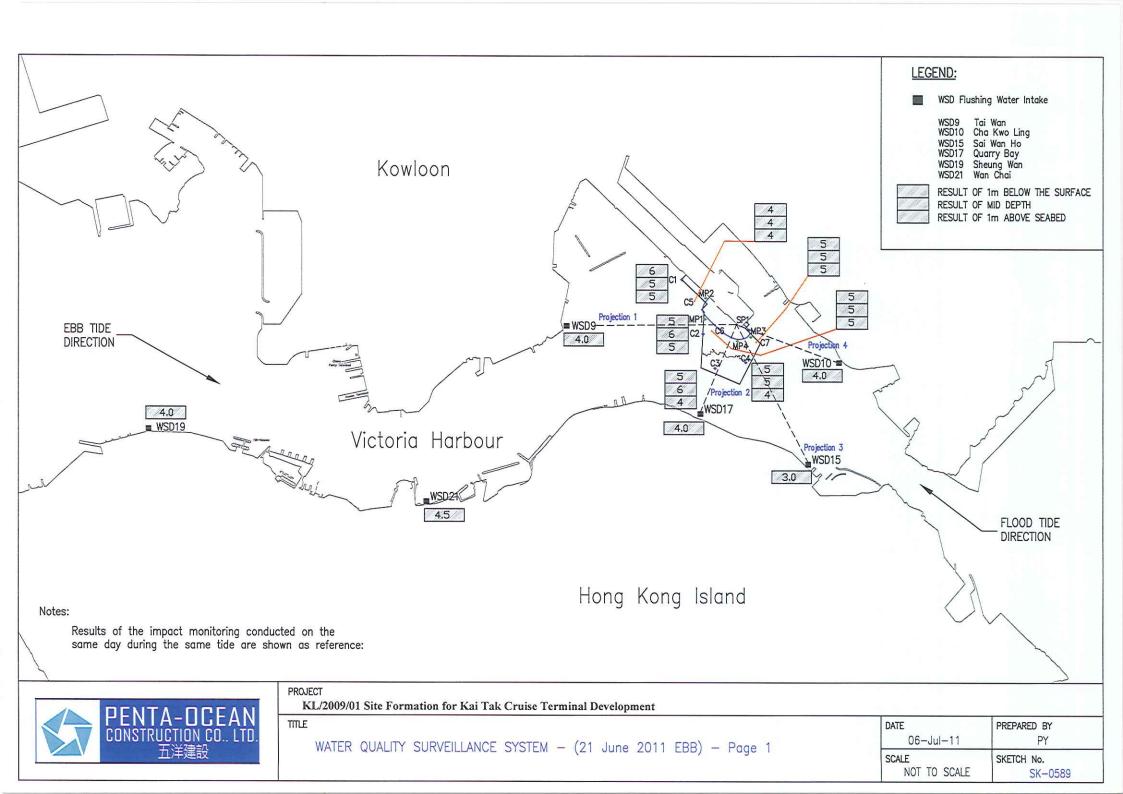


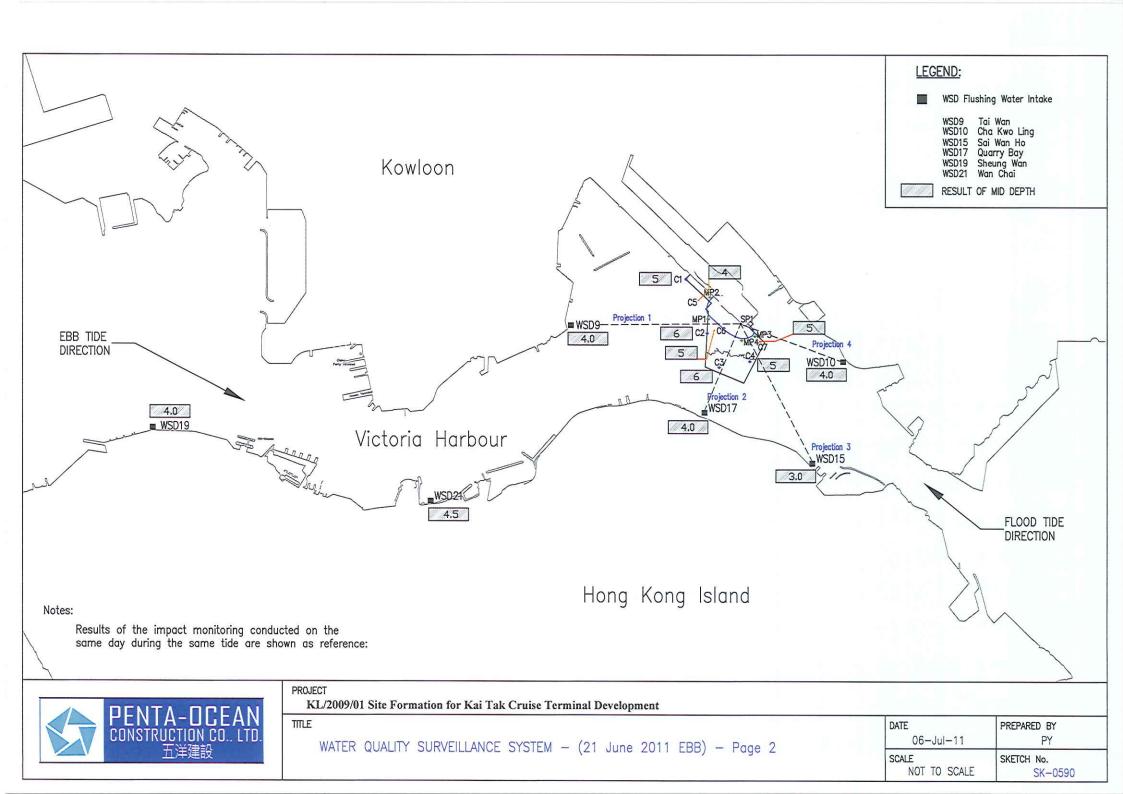

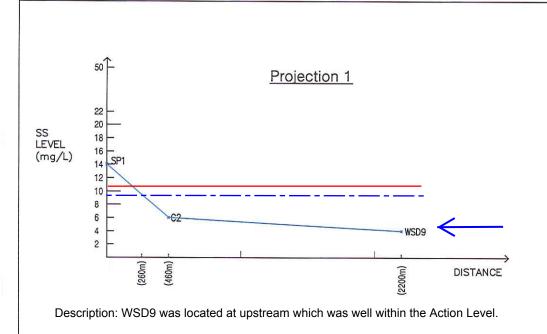


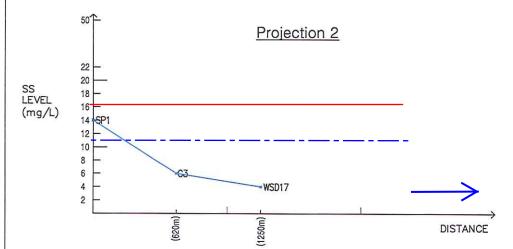

Description: WSD17 was located at downstream which had a SS level below the SP1 and control point C3.

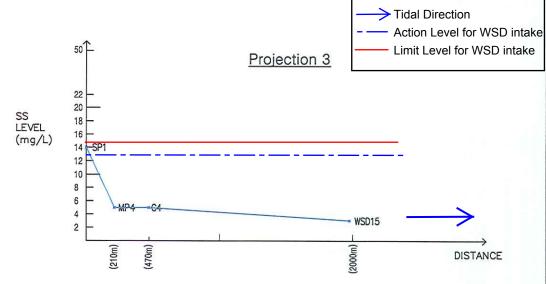

Description: WSD15 was located at downstream which had a SS level below SP1, MP4 and C4.

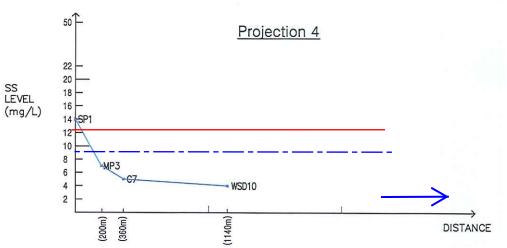

Description: WSD10 was located at downstream which had a SS level below the SP1, MP3 and control point C3.



**PROJECT** 

KL/2009/01 Site Formation for Kai Tak Cruise Terminal Development


GRAPHICAL PRESENTATION OF THE WATER
QUALITY SURVEILLANCE SYSTEM MONITORING
RESULTS AT MID DEPTH — (21 June 2011 EBB)


DATE 06-Jul-11	PREPARED BY PY
SCALE	SKETCH No.
NOT TO SCALE	SK-0591


# Water Quality Surveillance System Monitoring Results - 8 July 2011 (Flood Tide)

Mo	nitoring Location	Turbidity in	Compare to	Suspended	Compare to
1110		NTU	Trigger Level	Solids in mg/L	Trigger Level
	1m below the surface	8.81	N/A	18	N/A
SP1	mid depth	16.1	N/A	34	N/A
×	1m above the seabed	12.9	N/A	28	N/A
	1m below the surface	2.86	N/A	5	N/A
MP1	mid depth	3.89	N/A	9	N/A
	1m above the seabed	4.10	N/A	16	N/A
	1m below the surface	2.51	N/A	5	N/A
MP2	mid depth	2.62	N/A	5	N/A
	1m above the seabed	4.03	N/A	13	N/A
	1m below the surface	2.56	N/A	6	N/A
MP3	mid depth	2.29	N/A	7	N/A
	1m above the seabed	2.85	N/A	10	N/A
	1m below the surface	2.49	N/A	5	N/A
MP4	mid depth	2.92	N/A	8	N/A
	1m above the seabed	4.60	N/A	7	N/A
	1m below the surface	2.90	Lower	9	Lower
C1	mid depth	3.16	Lower	8	Lower
	1m above the seabed	3.28	Lower	9	Lower
	1m below the surface	2.48	Lower	10	Lower
C2	mid depth	2.83	Lower	8	Lower
	1m above the seabed	3.28	Lower	8	Lower
	1m below the surface	2.94	Lower	8	Lower
C3	mid depth	2.52	Lower	7	Lower
	1m above the seabed	2.72	Lower	8	Lower
	1m below the surface	2.46	Lower	7	Lower
C4	mid depth	3.02	Lower	7	Lower
	1m above the seabed	5.14	Lower	12	Lower
	1m below the surface	3.08	N/A	7	N/A
C5	mid depth	3.54	N/A	8	N/A
	1m above the seabed	2.92	N/A	10	N/A
	1m below the surface	1.54	N/A	6	N/A
C6	mid depth	4.44	N/A	9	N/A
	1m above the seabed	3.72	N/A	6	N/A
	1m below the surface	2.60	N/A	7	N/A
C7	mid depth	2.43	N/A	4	N/A
	1m above the seabed	3.19	N/A	3	N/A

Control	Trigger Level for Turbidity in	Trigger Level for SS in mg/L
Point	NTU for All Season	for Wet Season
C1	12.3 for Flood Tide	
C2	12.3 for Flood Tide	18.5
СЗ	16.9	18.3
C4	10.5 for Ebb Tide	

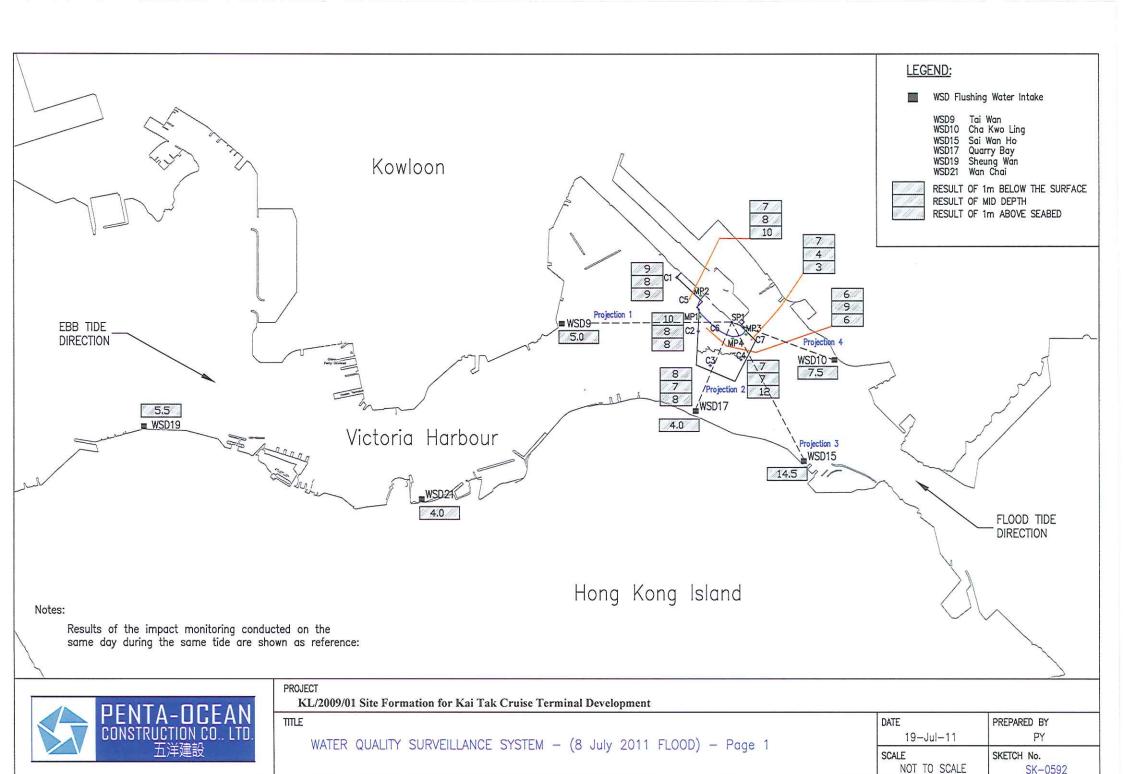

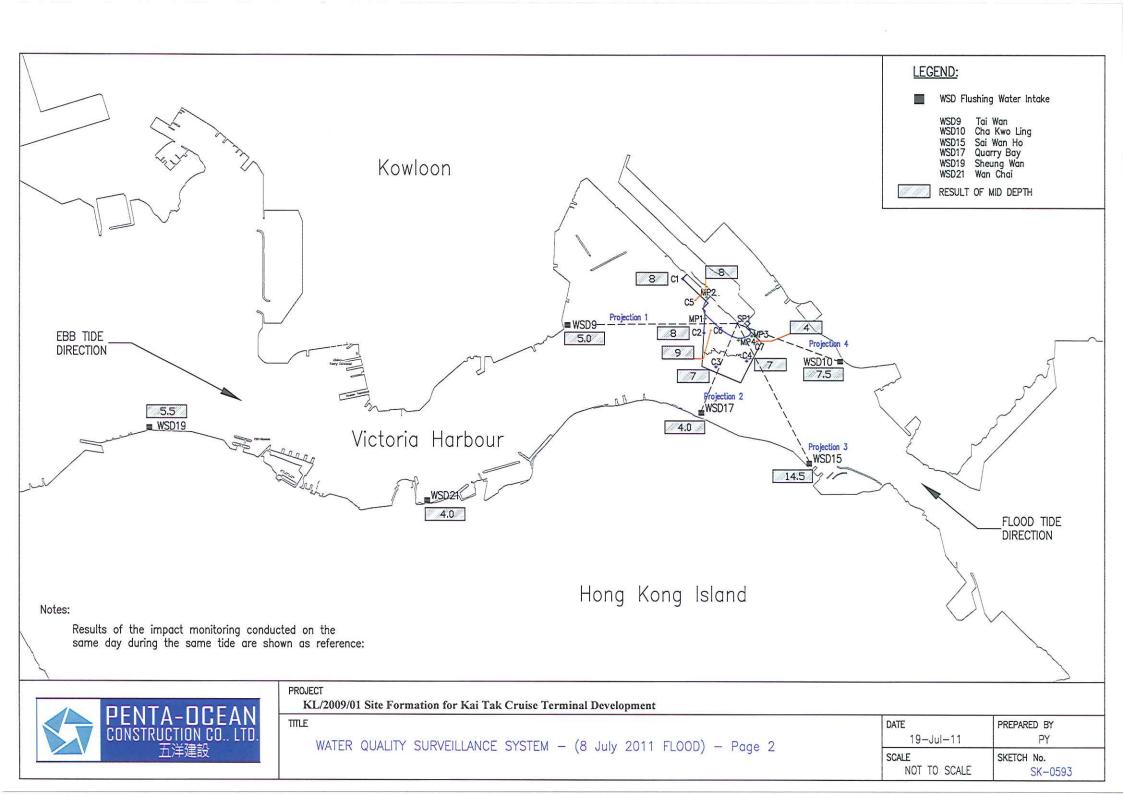


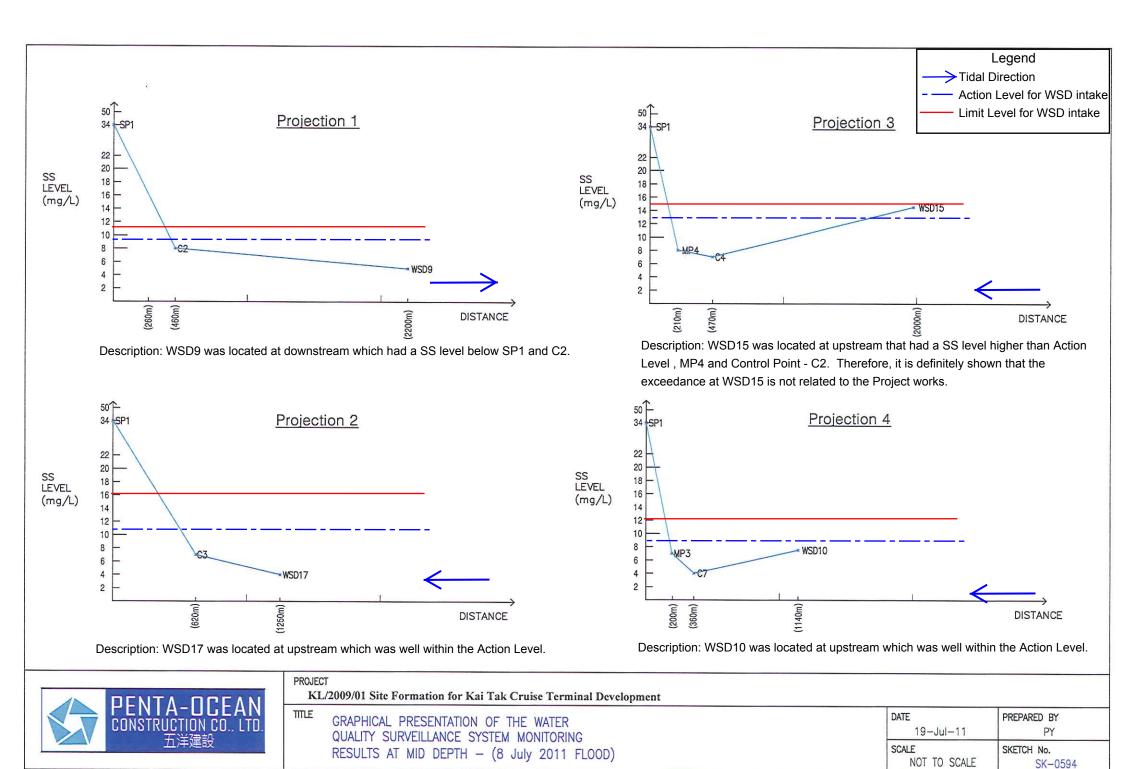



# Water Quality Surveillance System Monitoring Results - 20 July 2011 (Ebb Tide)


Mo	nitoring Location	Turbidity in	Compare to	Suspended	Compare to
		NTU	Trigger Level	Solids in mg/L	Trigger Level
CD1	1m below the surface	5.98	N/A	13	N/A
SP1	mid depth	5.67	N/A	14	N/A
	1m above the seabed	4.56	N/A	8	N/A
	1m below the surface	1.54	N/A	6	N/A
MP1	mid depth	2.44	N/A	8	N/A
	1m above the seabed	1.82	N/A	7	N/A
	1m below the surface	2.00	N/A	4	N/A
MP2	mid depth	2.94	N/A	5	N/A
	1m above the seabed	1.88	N/A	6	N/A
	1m below the surface	2.55	N/A	4	N/A
MP3	mid depth	3.31	N/A	8	N/A
	1m above the seabed	3.32	N/A	8	N/A
	1m below the surface	2.10	N/A	6	N/A
MP4	mid depth	2.48	N/A	5	N/A
	1m above the seabed	2.63	N/A	4	N/A
	1m below the surface	2.16	Lower	2	Lower
C1	mid depth	1.73	Lower	6	Lower
	1m above the seabed	2.31	Lower	4	Lower
	1m below the surface	1.70	Lower	6	Lower
C2	mid depth	2.10	Lower	5	Lower
	1m above the seabed	2.00	Lower	3	Lower
	1m below the surface	2.95	Lower	4	Lower
C3	mid depth	2.92	Lower	8	Lower
	1m above the seabed	3.15	Lower	7	Lower
	1m below the surface	2.40	Lower	5	Lower
C4	mid depth	2.36	Lower	5	Lower
	1m above the seabed	4.43	Lower	9	Lower
	1m below the surface	2.21	N/A	5	N/A
C5	mid depth	2.22	N/A	7	N/A
	1m above the seabed	2.40	N/A	6	N/A
	1m below the surface	1.95	N/A	6	N/A
C6	mid depth	2.50	N/A	5	N/A
31 mar (1997)	1m above the seabed	2.21	N/A	6	N/A
	1m below the surface	2.15	N/A	7	N/A
C7	mid depth	1.75	N/A	9	N/A
	1m above the seabed	3.39	N/A	7	N/A

Control Point	Trigger Level for Turbidity in NTU for All Season	Trigger Level for SS in mg/L for Wet Season
C1	12.3 for Flood Tide	
C2	12.3 for Flood Tide	10.5
C3	16.9	18.5
C4	10.5 for Ebb Tide	

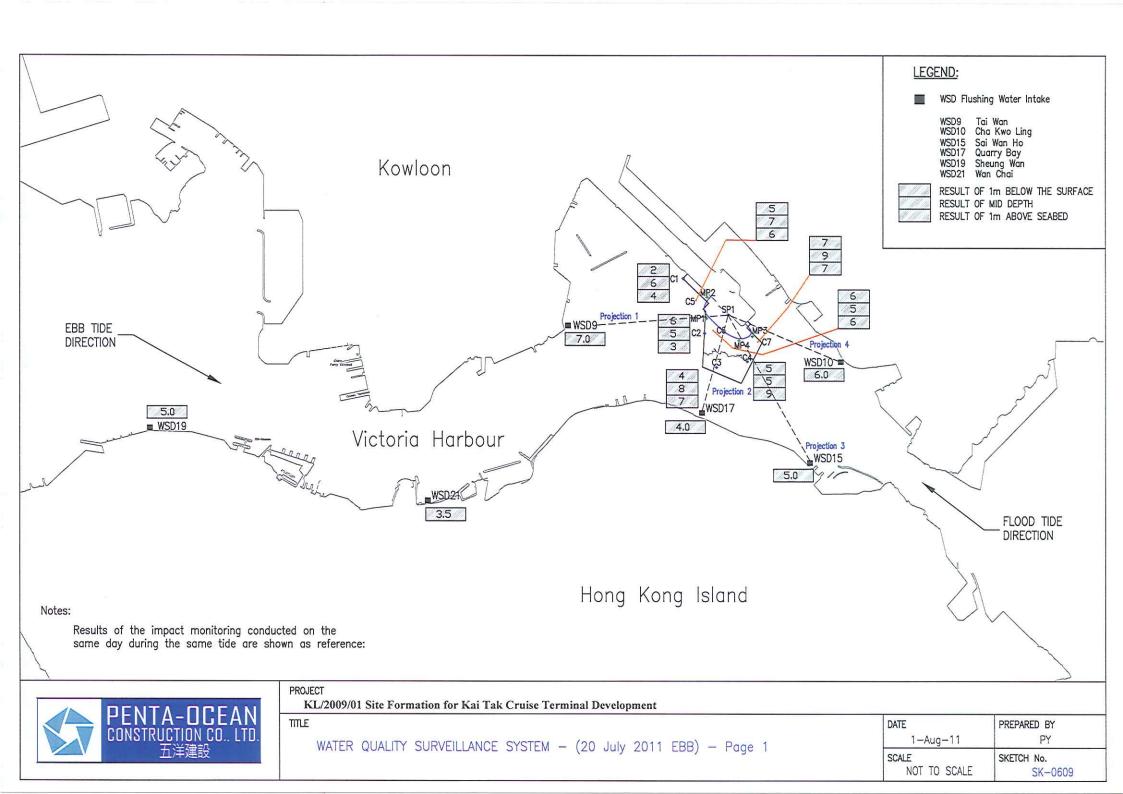


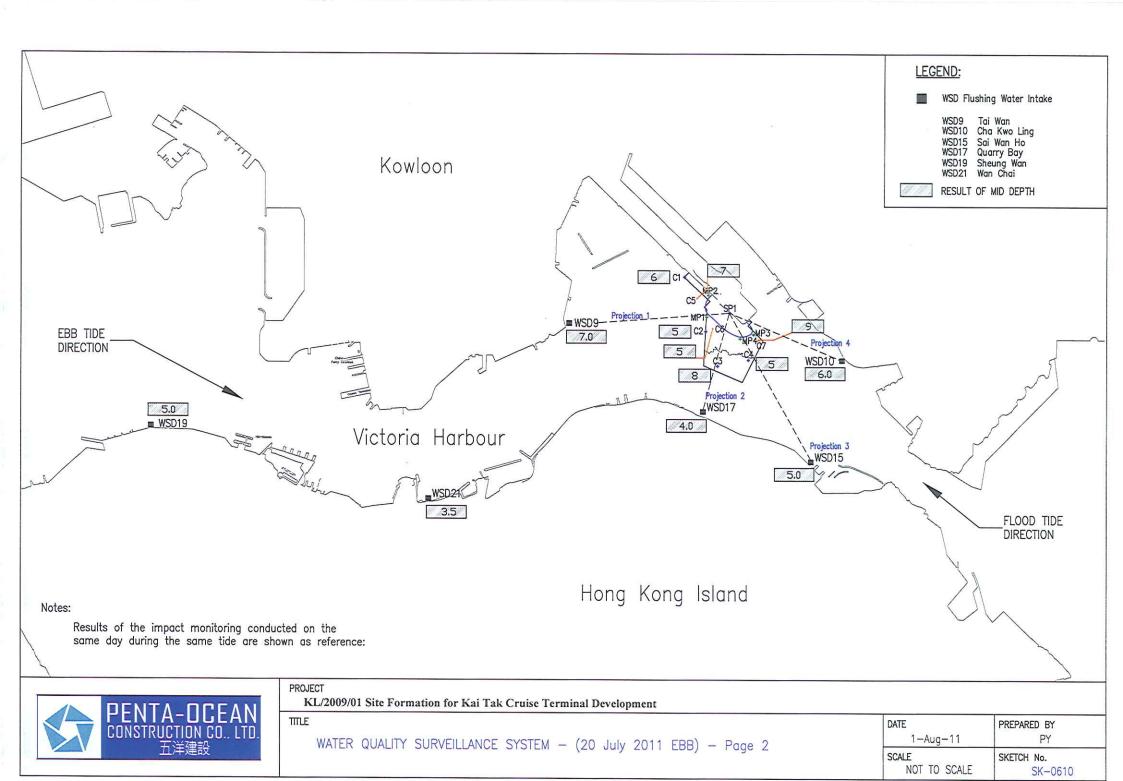

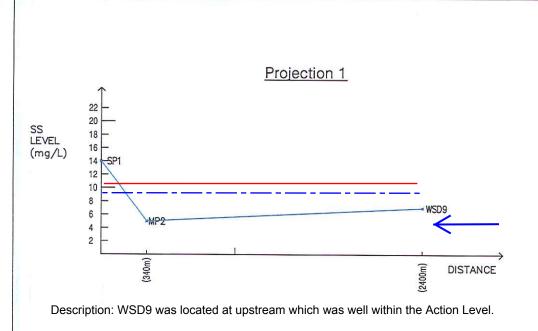


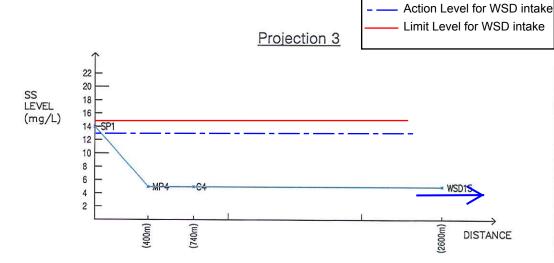

Description: WSD15 was located at downstream which which was well within the Action Level.

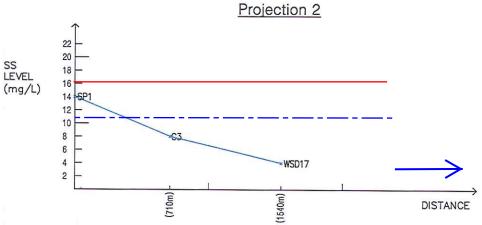

Description: WSD17 was located at downstream which had a SS level below the SP1 and control point C3.

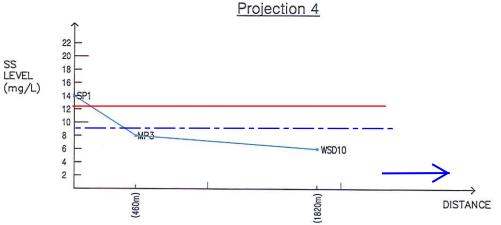

Description: WSD10 was located at downstream which had a SS level below the SP1 and MP3.



**PROJECT** 

KL/2009/01 Site Formation for Kai Tak Cruise Terminal Development

GRAPHICAL PRESENTATION OF THE WATER
QUALITY SURVEILLANCE SYSTEM MONITORING
RESULTS AT MID DEPTH — (20 July 2011 EBB)

DATE 1-Aug-11	PREPARED BY
SCALE	SKETCH No.
NOT TO SCALE	SK-0611


Legend


Tidal Direction

# Water Quality Surveillance System Monitoring Results - 9 August 2011 (Flood Tide)

Mo	nitoring Location	Turbidity in NTU	Compare to Trigger Level	Suspended Solids in mg/L	Compare to Trigger Level
	1m below the surface	4.40	N/A	7	N/A
SP1	mid depth	5.43	N/A	8	N/A
211	1m above the seabed	14.25	N/A	27	N/A
	1m below the surface	3.62	N/A	9	N/A
MP1	mid depth	4.27	N/A	5	N/A
	1m above the seabed	3.71	N/A	6	N/A
	1m below the surface	3.67	N/A	7	N/A
MP2	mid depth	5.43	N/A	9	N/A
1,112	1m above the seabed	5.84	N/A	10	N/A
	1m below the surface	3.30	N/A	8	N/A
MP3	mid depth	3.38	N/A	3	N/A
1,110	1m above the seabed	4.26	N/A	5	N/A
	1m below the surface	2.79	N/A	5	N/A
MP4	mid depth	2.75	N/A	4	N/A
1111	1m above the seabed	3.50	N/A	8	N/A
	1m below the surface	2.90	Lower	6	Lower
C1	mid depth	3.57	Lower	6	Lower
~ ·	1m above the seabed	3.17	Lower	5	Lower
	1m below the surface	2.77	Lower	6	Lower
C2	mid depth	3.59	Lower	4	Lower
	1m above the seabed	3.27	Lower	4	Lower
	1m below the surface	2.88	Lower	3	Lower
C3	mid depth	2.60	Lower	3	Lower
	1m above the seabed	2.65	Lower	4	Lower
	1m below the surface	2.49	Lower	7	Lower
C4	mid depth	3.01	Lower	6	Lower
	1m above the seabed	3.27	Lower	4	Lower
	1m below the surface	3.59	N/A	6	N/A
C5	mid depth	4.75	N/A	7	N/A
	1m above the seabed	7.54	N/A	14	N/A
	1m below the surface	3.24	N/A	6	N/A
C6	mid depth	2.62	N/A	5	N/A
200001701	1m above the seabed	3.82	N/A	6	N/A
	1m below the surface	3.61	N/A	5	N/A
C7	mid depth	3.10	N/A	5	N/A
1000 m. P.	1m above the seabed	3.35	N/A	7	N/A


Control Point	Trigger Level for Turbidity in NTU for All Season	Trigger Level for SS in mg/L for Wet Season
C1	12.3 for Flood Tide	
C2	12.3 for Flood Tide	18.5
C3	16.9	10.5
C4	10.5 for Ebb Tide	

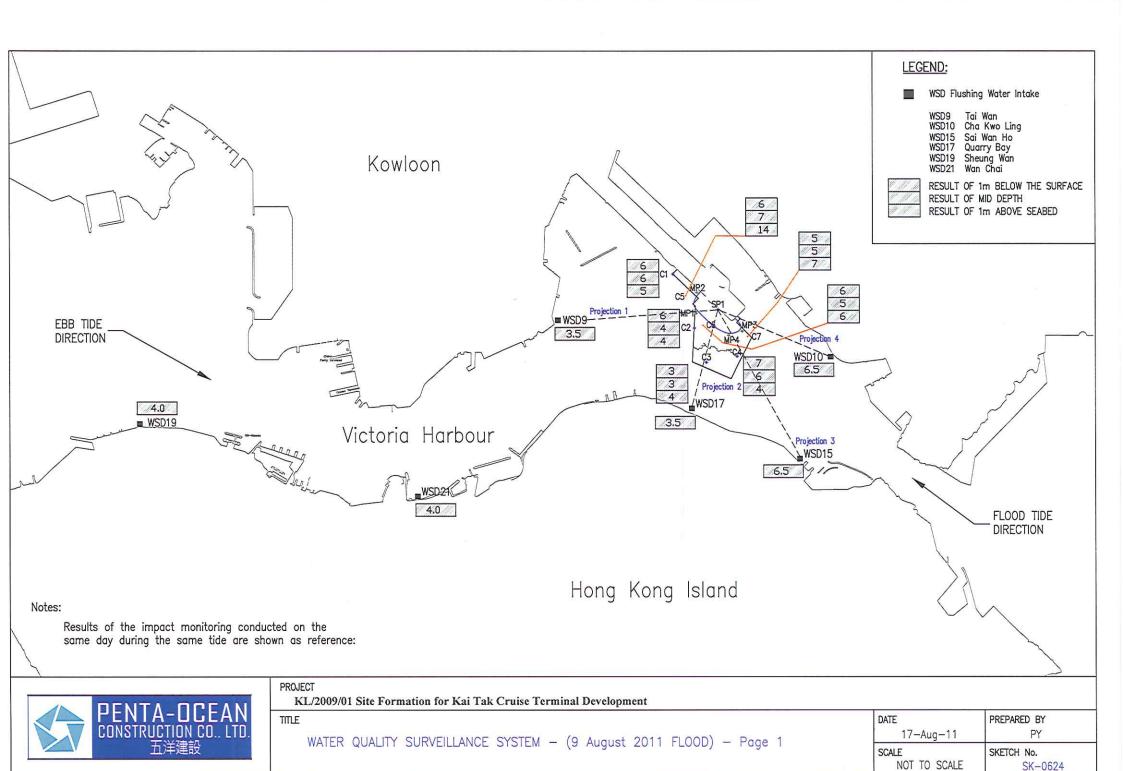

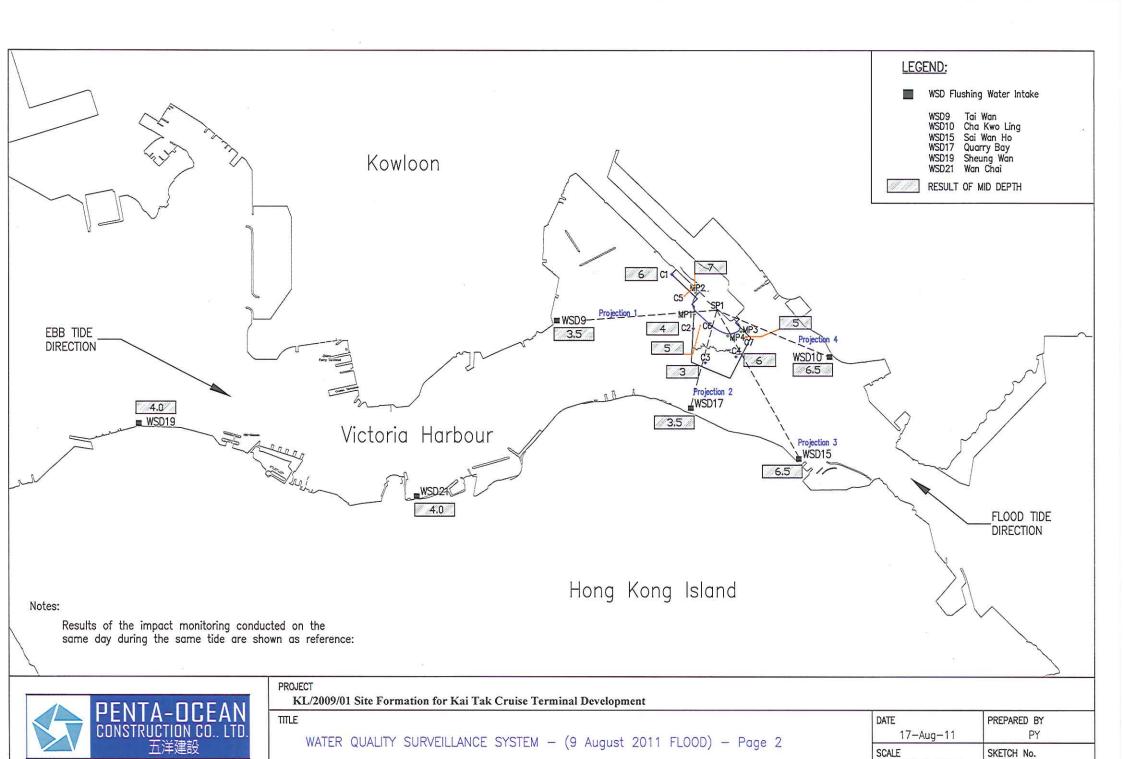

NOT TO SCALE


SK-0625

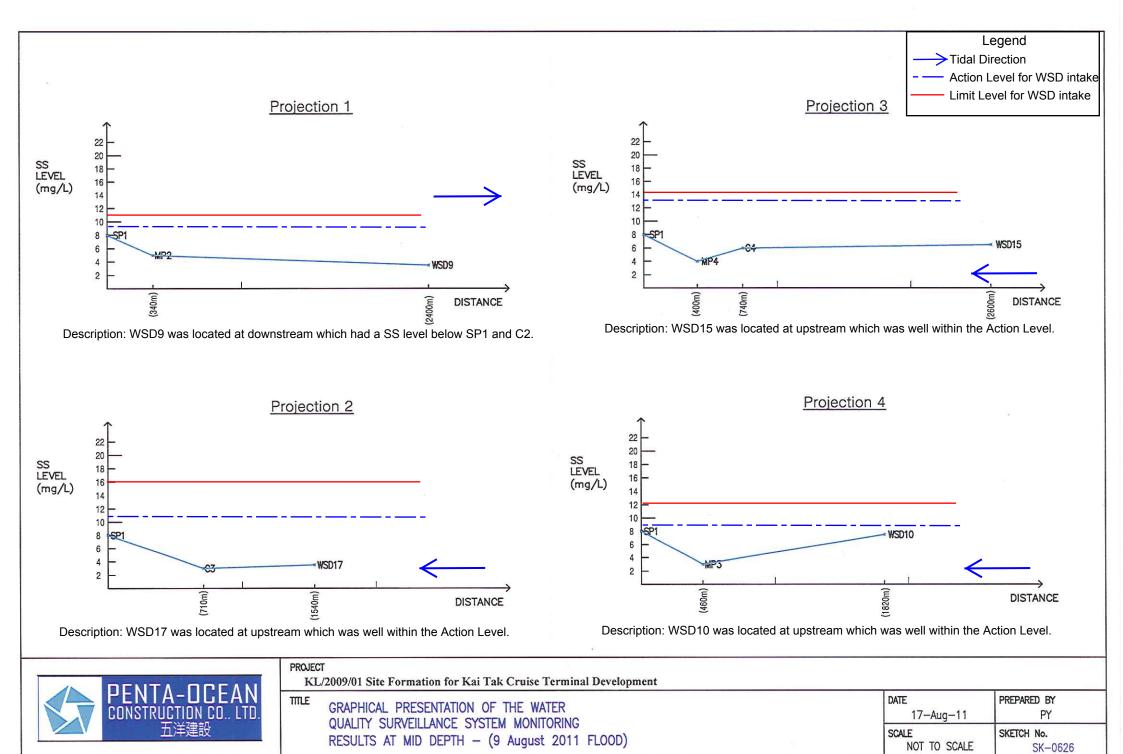


# Water Quality Surveillance System Monitoring Results - 23 August 2011 (Ebb Tide)

Mo	nitoring Location	Turbidity in NTU	Compare to Trigger Level	Suspended Solids in mg/L	Compare to Trigger Level
	1m below the surface	2.60	N/A	6	N/A
SP1	mid depth	11.3	N/A	39	N/A
~ .	1m above the seabed	4.50	N/A	8	N/A
	1m below the surface	2.22	N/A	4	N/A
MP1	mid depth	2.76 N/A		4	N/A
	1m above the seabed	2.00	N/A	2	N/A
	1m below the surface	1.79	N/A	4	N/A
MP2	mid depth	3.23	N/A	3	N/A
	1m above the seabed	2.08	N/A	3	N/A
	1m below the surface	2.58	N/A	8	N/A
MP3	mid depth	2.22	N/A	4	N/A
	1m above the seabed	2.28	N/A	4	N/A
	1m below the surface	2.63	N/A	8	N/A
MP4	mid depth	2.51	N/A	4	N/A
	1m above the seabed	2.40	N/A	3	N/A
1	1m below the surface	2.45	Lower	4	Lower
C1	mid depth	3.35	Lower	3	Lower
	1m above the seabed	2.17	Lower	4	Lower
	1m below the surface	2.16	Lower	3	Lower
C2	mid depth	2.45	Lower	2	Lower
	1m above the seabed	2.19	Lower	3	Lower
	1m below the surface	2.23	Lower	4	Lower
C3	mid depth	2.45	Lower	3	Lower
	1m above the seabed	1.91	Lower	3	Lower
	1m below the surface	2.07	Lower	2	Lower
C4	mid depth	2.30	Lower	2	Lower
	1m above the seabed	2.04	Lower	3	Lower
	1m below the surface	2.18	N/A	4	N/A
C5	mid depth	2.13	N/A	4	N/A
	1m above the seabed	2.51	N/A	4	N/A
	1m below the surface	1.90	N/A	3	N/A
C6	mid depth	2.51	N/A	4	N/A
	1m above the seabed	2.18	N/A	2	N/A
	1m below the surface	1.94	N/A	3	N/A
C7	mid depth	1.88	N/A	3	N/A
	1m above the seabed	1.97	N/A	2	N/A


Control Point	Trigger Level for Turbidity in NTU for All Season	Trigger Level for SS in mg/L for Wet Season
C1	12.3 for Flood Tide	
C2	12.3 for Flood Tide	10.5
C3	16.9	18.5
C4	10.5 for Ebb Tide	

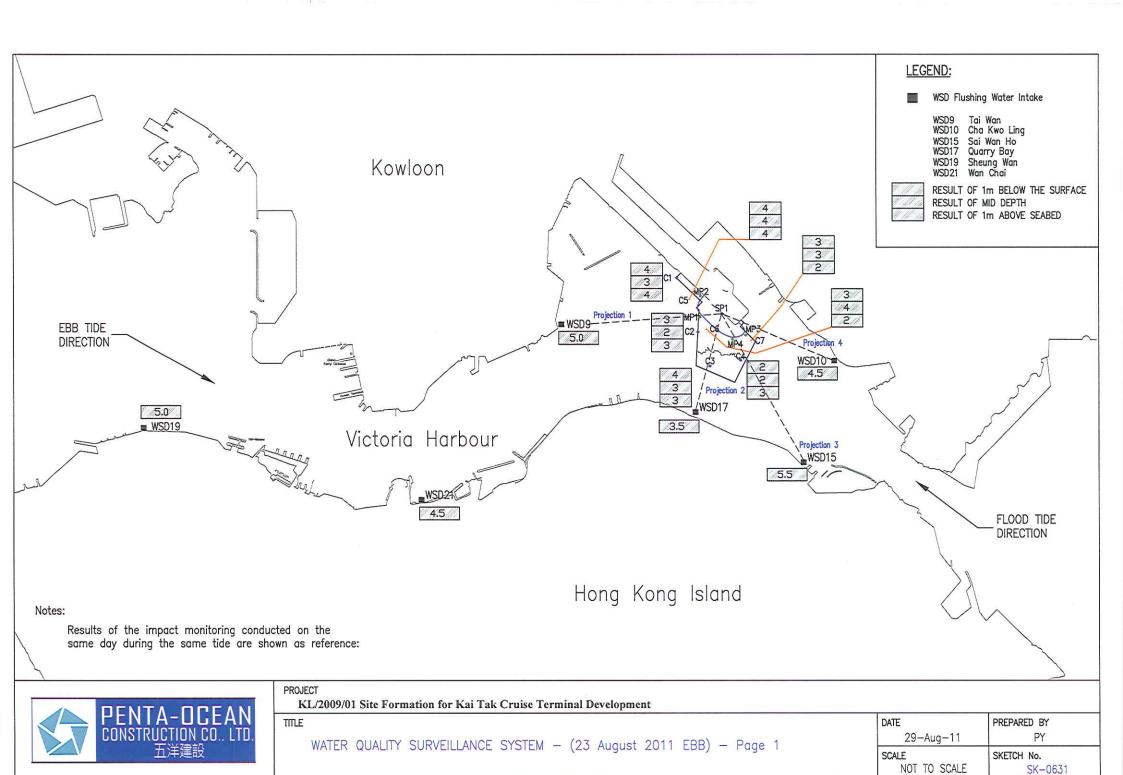


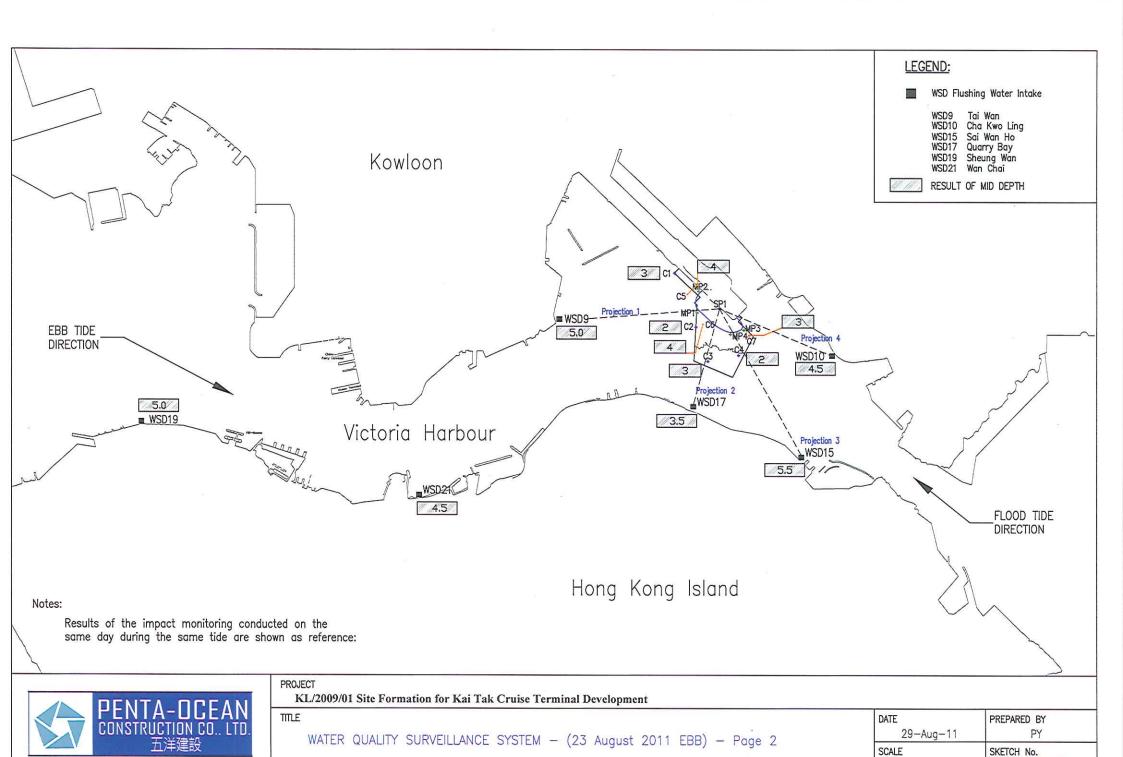


NOT TO SCALE


SK-0632

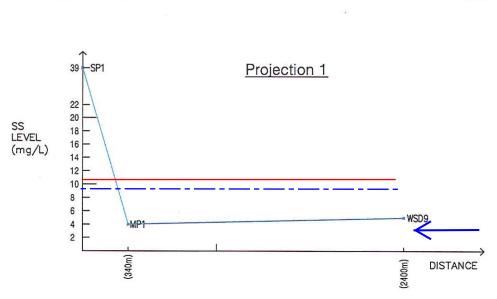




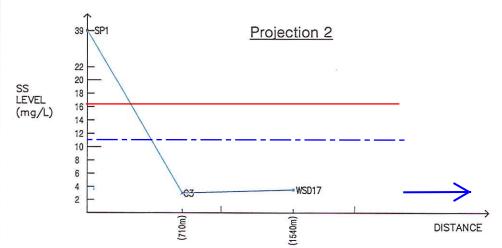

Description: WSD17 was located at downstream which had a SS level below the Action Level.

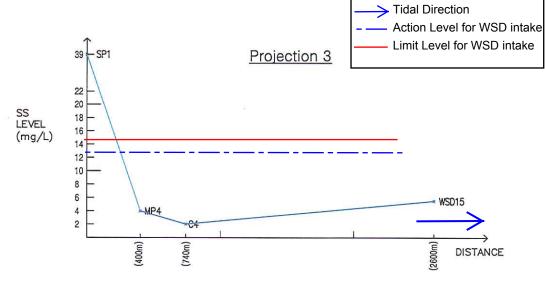

Description: WSD15 was located at downstream which which was well within the Action Level.

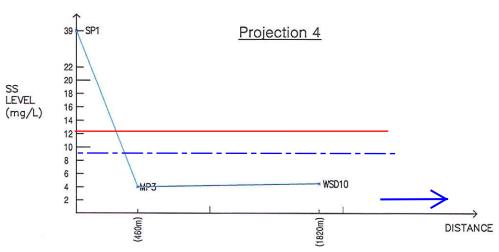

Description: WSD10 was located at downstream which had a SS level below the Action Level.



**PROJECT** 

TITLE

KL/2009/01 Site Formation for Kai Tak Cruise Terminal Development

GRAPHICAL PRESENTATION OF THE WATER QUALITY SURVEILLANCE SYSTEM MONITORING RESULTS AT MID DEPTH — (23 August 2011 EBB)

DATE		PREPARED BY	
	29-Aug-11	PY	
	SCALE	SKETCH No.	
	NOT TO SCALE	SK-0633	

Legend

## Appendix 5.1

**Event and Action Plan** 



#### **Event and Action Plan for Construction Noise**

EVENT		ACTION		
	ET	IC(E)	ER	CONTRACTOR
Action Level	<ol> <li>Notify IEC and Contractor;</li> <li>Carry out investigation;</li> <li>Report the results of investigation to the IEC, ER and Contractor;</li> <li>Discuss with the Contractor and formulate remedial measures;</li> <li>Increase monitoring frequency to check mitigation effectiveness.</li> </ol>	1. Review the analysed results submitted by the ET; 2. Review the proposed remedial measures by the Contractor and advise the ER accordingly; 3. Supervise the implementation of remedial measures.  4	,	Submit noise mitigation proposals to IEC;     Implement noise mitigation proposals.
Limit Level	<ol> <li>Identify source;</li> <li>Inform IEC, ER, EPD and Contractor;</li> <li>Repeat measurements to confirm findings;</li> <li>Increase monitoring frequency;</li> <li>Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented;</li> <li>Inform IEC, ER and EPD the causes and actions taken for the exceedances;</li> <li>Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results;</li> <li>If exceedance stops, cease additional monitoring.</li> </ol>	remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly; 3. Supervise the implementation of	1. Confirm receipt of notification of failure in writing; 2. Notify Contractor; 3. Require Contractor to propose remedial measures for the analysed noise problem; 4. Ensure remedial measures properly implemented; 5. If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated.	<ol> <li>Take immediate action to avoid further exceedance;</li> <li>Submit proposals for remedial actions to IEC within 3 working days of notification;</li> <li>Implement the agreed proposals;</li> <li>Submit further proposal if problem still not under control;</li> <li>Stop the relevant portion of works as instructed by the ER until the exceedance is abated.</li> </ol>



### **Lam Environmental Services Limited**

# **Event and Action Plan for Marine Water Quality**

EVENT		ACTION		
	ET	IEC	ER	CONTRACTOR
Action level being exceeded by one sampling day	<ol> <li>Repeat in-situ measurement to confirm findings;</li> <li>Identify source(s) of impact;</li> <li>Inform IEC and Contractor;</li> <li>Check monitoring data, all plant, equipment and Contractor's working methods;</li> <li>Discuss mitigation measures with IEC and Contractor;</li> <li>(The above actions should be taken within 1 working day after the exceedance is identified)</li> <li>Repeat measurement on next day of exceedance.</li> </ol>	Discuss with ET and Contractor on the mitigation measures;     Review proposals on mitigation measures submitted by Contractor and advise the ER accordingly;     Assess the effectiveness of the implemented mitigation measures.     (The above actions should be taken within 1 working day after the exceedance is identified)	Discuss with IEC on the proposed mitigation measures;     Make agreement on the mitigation measures to be implemented.     (The above actions should be taken within 1 working day after the exceedance is identified)	1. Inform the ER and confirm notification of the non-compliance in writing; 2. Rectify unacceptable practice; 3. Check all plant and equipment; 4. Review the working methods and consider additional measures such as use of frame-type silt curtain, deployment of double silt curtains, slowing down, or rescheduling of works; 5. Discuss with ET and IEC and propose mitigation measures to IEC and ER; 6. Implement the agreed mitigation measures. 7. (The above actions should be taken within 1 working day after the exceedance is identified)
Action level being exceeded by more than one consecutive sampling days	Identify source(s) of impact;     Inform IEC and Contractor;     Check monitoring data, all plant, equipment and Contractor's working methods;     Discuss mitigation measures with IEC and Contractor;	Discuss with ET and Contractor on the mitigation measures;     Review proposals on mitigation measures submitted by Contractor and advise the ER	Discuss with IEC on the proposed mitigation measures;     Make agreement on the mitigation measures to be implemented;     Assess the effectiveness	Inform the Engineer and confirm notification of the non-compliance in writing;     Rectify unacceptable practice;     Check all plant and

EVENT AND ACTION PLAN



EVENT		ACTION		
	ET	IEC	ER	CONTRACTOR
	5. Ensure mitigation measures are implemented; 6. Prepare to increase the monitoring frequency to daily; 7. (The above actions should be taken within 1 working day after the exceedance is identified)  8. Repeat measurement on next working day of exceedance.	accordingly; 3. Assess the effectiveness of the implemented mitigation measures. 4. (The above actions should be taken within 1 working day after the exceedance is identified)	of the implemented mitigation measures.  4. (The above actions should be taken within 1 working day after the exceedance is identified)	equipment; 4. Review the working methods and consider additional measures such as use of frametype silt curtain, deployment of double silt curtains, slowing down, or rescheduling of works; 5. Discuss with ET and IEC and propose mitigation measures to IEC and ER within 3 working days; 6. Implement the agreed mitigation measures. 7. (The above actions should be taken within 1 working day after the exceedance is identified)



EVENT		ACTION		
	ET	IEC	ER	CONTRACTOR
Limit level being exceeded by one sampling day	1. Repeat in-situ measurement to confirm findings; 2. Identify source(s) of impact; 3. Inform IEC, Contractor and EPD; 4. Check monitoring data, all plant, equipment and Contractor's working methods; 5. Discuss mitigation measures with IEC, ER and Contractor; 6. Ensure mitigation measures are implemented; 7. Increase the monitoring frequency to daily until no exceedance of Limit Level. 8. (The above actions should be taken within 1 working day after the exceedance is identified)	Discuss with ET and Contractor on the mitigation measures;     Review proposals on mitigation measures submitted by Contractor and advise the ER accordingly;     Assess the effectiveness of the implemented mitigation measures.     (The above actions should be taken within 1 working day after the exceedance is identified)	Discuss with IEC, ET and Contractor on the proposed mitigation measures;     Request Contractor to critically review the working methods;     Make agreement on the mitigation measures to be implemented;     Assess the effectiveness of the implemented mitigation measures.     (The above actions should be taken within 1 working day after the exceedance is identified)	1. Inform the Engineer and confirm notification of the non-compliance in writing; 2. Rectify unacceptable practice; 3. Check all plant and equipment; 4. Review the working methods and consider additional measures such as use of frametype silt curtain, deployment of double silt curtains, slowing down, or rescheduling of works; 5. Discuss with ET, IEC and ER and propose mitigation measures to IEC and ER within 3 working days; 6. Implement the agreed mitigation measures. 7. (The above actions should be taken within 1 working day after the exceedance is identified)



EVENT		ACTION		
	ET	IEC	ER	CONTRACTOR
Limit level being exceeded by more than one consecutive sampling days	<ol> <li>Identify source(s) of impact;</li> <li>Inform IEC, Contractor and EPD;</li> <li>Check monitoring data, all plant, equipment and Contractor's working methods;</li> <li>Discuss mitigation measures with IEC, ER and Contractor;</li> <li>Ensure mitigation measures are implemented;</li> <li>Increase the monitoring frequency to daily until no exceedance of Limit level for two consecutive days.</li> <li>(The above actions should be taken within 1 working day after the exceedance is identified)</li> </ol>	Discuss with ET and Contractor on the mitigation measures;     Review proposals on mitigation measures submitted by Contractor and advise the ER accordingly;     Assess the effectiveness of the implemented mitigation measures.     (The above actions should be taken within 1 working day after the exceedance is identified)	Discuss with IEC, ET and Contractor on the proposed mitigation measures;     Request Contractor to critically review the working methods;     Make agreement on the mitigation measures to be implemented;     Assess the effectiveness of the implemented mitigation measures;     Consider and instruct, if necessary, the Contractor to slow down or to stop all or part of the marine work until no exceedance of Limit level.     (The above actions should be taken within 1 working day after the exceedance is identified)	1. Inform the ER and confirm notification of the non-compliance in writing; 2. Rectify unacceptable practice; 3. Check all plant and equipment; 4. Review the working methods and consider additional measures such as use of frametype silt curtain, deployment of double silt curtains, slowing down, or rescheduling of works; 5. Discuss with ET, IEC and ER and propose mitigation measures to IEC and ER within 3 working days; 6. Implement the agreed mitigation measures; 7. As directed by the Engineer, to slow down or to stop all or part of the marine work or construction activities. 8. (The above actions should be taken within 1 working day after the exceedance is identified)


#### Appendix 5.2


Graphic Presentation of SS Results against to Tidal Movement along Victoria Harbour


#### Contract no. KL/2009/01 Site Formation for Kai Tak Cruise Terminal Development Summary of Recorded Exceedances in Reporting Quarter

Date	Tide	Station	Parameter	Exceedance	Value (mg/L)	Possible Cause of Exceedance	SS value (mg/L) in the nearest upstream station
1/6/2011	Mid-flood	WSD10	SS (mg/L)	LL	12.5	Upstream of the Project	N/A
1/6/2011	Mid-flood	WSD17	SS (mg/L)	AL	11.5	Upstream of the Project	N/A
17/6/2011	Mid-flood	WSD10	SS (mg/L)	AL	11	Upstream of the Project	N/A
30/6/2011	Mid-flood	WSD10	SS (mg/L)	LL	12.5	Upstream of the Project	N/A
6/7/2011	Mid-flood	WSD10	SS (mg/L)	AL	11	Upstream of the Project	N/A
8/7/2011	Mid-flood	WSD15	SS (mg/L)	AL	14.5	Upstream of the Project	N/A
12/7/2011	Mid-flood	WSD10	SS (mg/L)	AL	10	Upstream of the Project	N/A
16/7/2011	Mid-flood	WSD10	SS (mg/L)	AL	11.5	Upstream of the Project	N/A
26/7/2011	Mid-flood	WSD10	SS (mg/L)	AL	9.5	Upstream of the Project	N/A
13/8/2011	Mid-flood	WSD10	SS (mg/L)	LL	13	Upstream of the Project	N/A
27/8/2011	Mid-flood	WSD10	SS (mg/L)	AL	10	Upstream of the Project	N/A




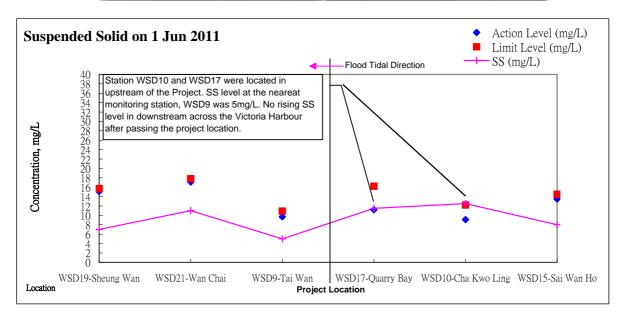


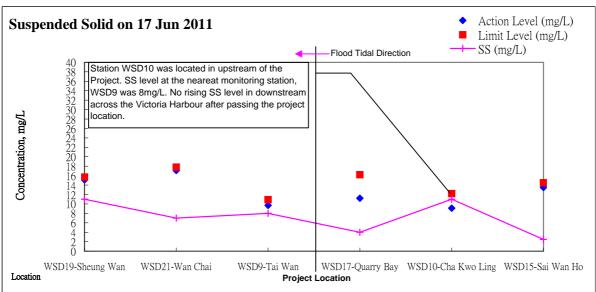


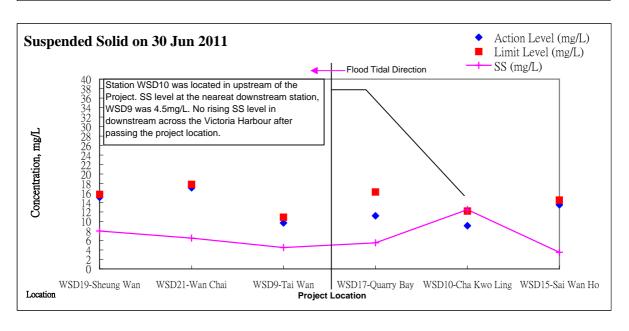




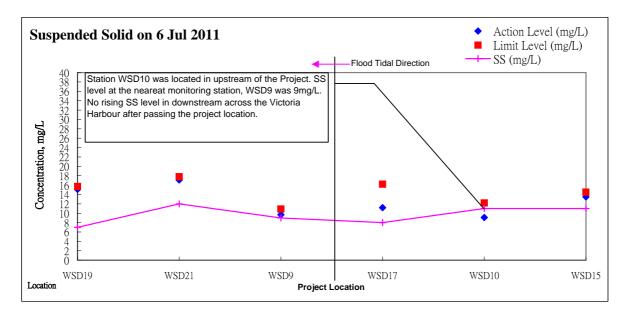


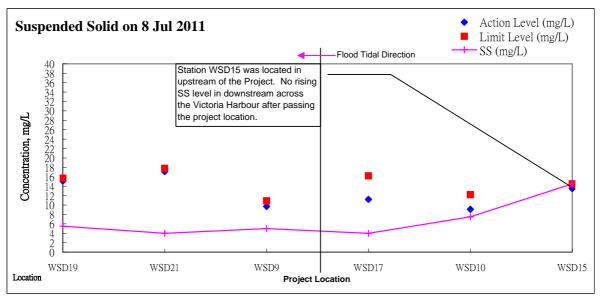

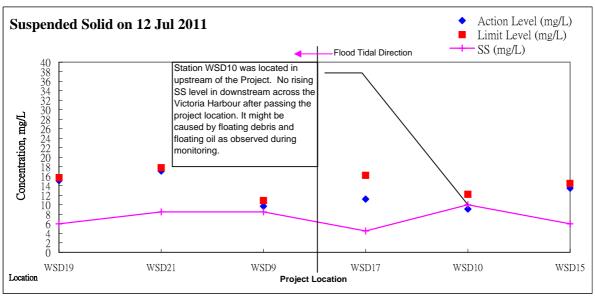



#### Graphic Presentation of SS Results Against the Tidal Movement along Victoria Harbour

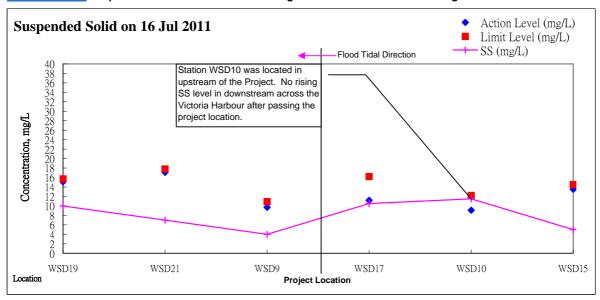

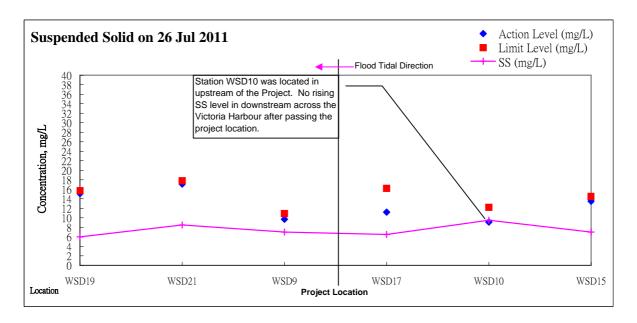



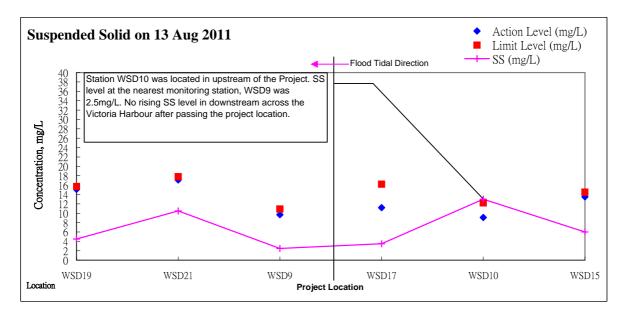

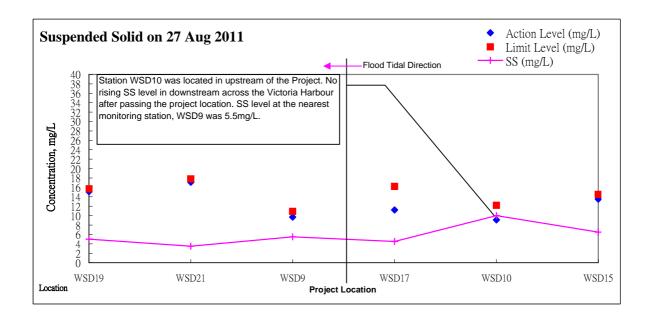


#### Appendix 5.3

Graphic Presentation of Water Quality Result with respect to Local Variation




#### Graphic Presentation of Water Quality Result of WSD9 - Tai Wan with respect to Local Variation

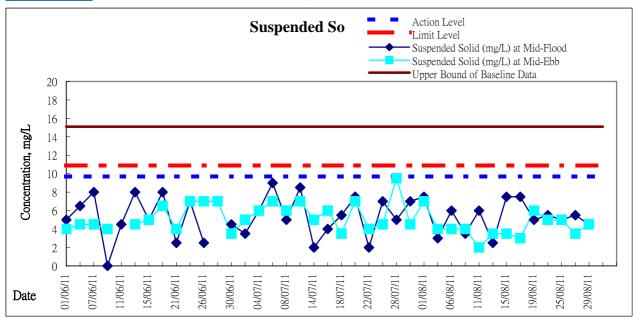

Remarks: WSD9 is located at upstream during the ebb tides while at downstream during flood tides.




Graphic Presentation of Water Quality Result of WSD10 - Cha Kwo Ling with respect to Local Variation

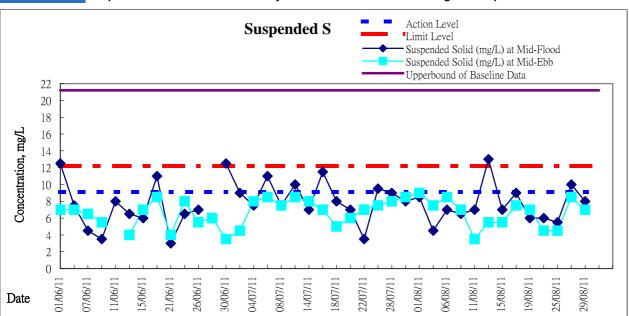

Remarks: WSD10 is located at upstream during the flood tides while at downstream during ebb tides.




Graphic Presentation of Water Quality Result of WSD15 - Sai Wan Ho with respect to Local Variation

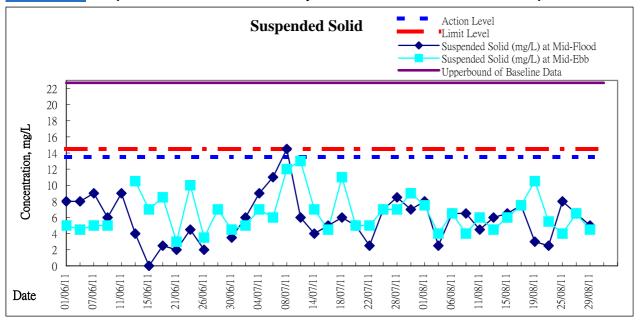

Remarks: WSD15 is located at upstream during the flood tides while at downstream during ebb tides.




Graphic Presentation of Water Quality Result of WSD17 - Quarry Bay with respect to Local Variation

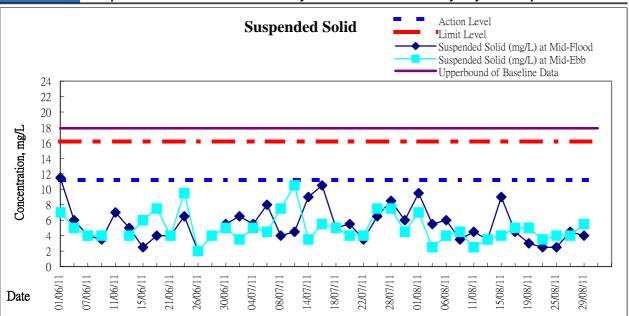


Remarks: WSD17 is located at upstream during the flood tides while at downstream during ebb tides.

# am

Graphic Presentation of Water Quality Result of WSD19 - Sheung Wan with respect to Local Variation

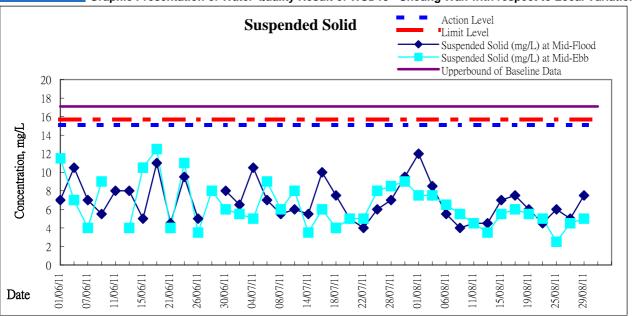


Remarks: WSD19 is located at upstream during the ebb tides while at downstream during flood tides.

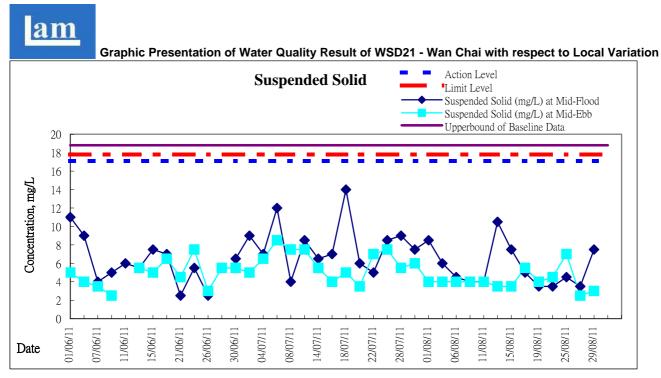

Remarks: WSD21 is located at upstream during the ebb tides while at downstream during flood tides.

#### Appendix 7.1

# Construction Programme for Reporting Quarter

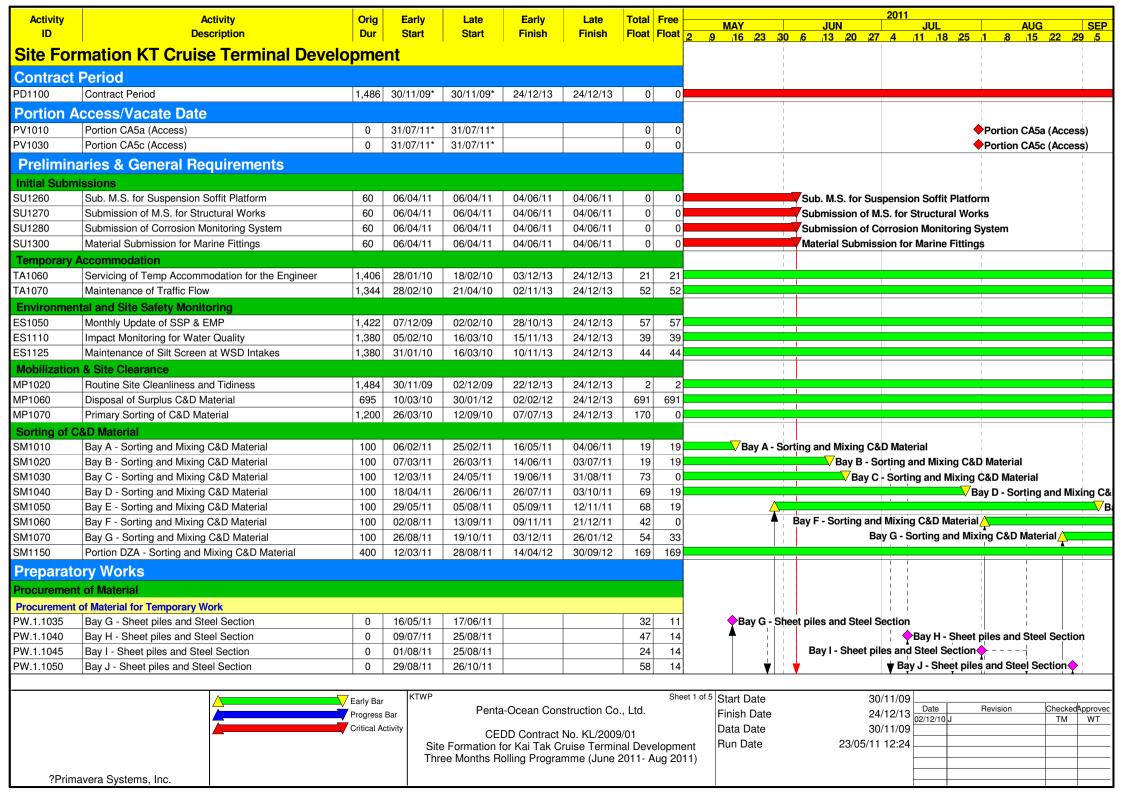

Activity	Activity	Orig	Early	Late	Early	Late	Total	Froo	2011											
ID	Description	Dur	Start	Start	Finish	Finish	Float		MAY 2 9 16				3 .20	27	4	JUL 11 18	25		AUG 15 22	SEP 29 5
Production	of Precast Units								<u> </u>	<u>  25</u>			J 20	, 21	4	\		Å ~	10 22	A A
	t Panel (PFP) along PipePile Wall										1						1		!	
PW.2.1080	Bay G - Infront of Portion Delivery	0	27/05/11	15/07/11			49	28		<b>\rightarrow</b>	Bay C	G - Infr	ont of	Portic	n Deli	verv	1		!	
PW.2.1085	Bay H - Infront of Portion Delivery	0	23/07/11	29/09/11			68	35		<b>A</b>						Delivery	<b>-</b> -		<u> </u>	h
PW.2.1090	Bay I - Infront of Portion Delivery	0	15/08/11	29/09/11			45	35			į			Ba	ıy İ - In	front of	Portio	Delivery	$\diamond$	
Precast Cond	crete Block (PCB) for Seawall										į			1					<b>A</b>	
PW.3.1020	Portion NDA	56	07/04/11	30/10/13	01/06/11	24/12/13	937	937			V	ortion	NDA	I I						
Precast Plan	ks for Decking										į									
PW.4.1000	Preparation for Offsite Fabrication of Planks	60	16/04/11	28/06/13	14/06/11	26/08/13	804	0			'		√ Prep	aratio	on for	Offsite F	abrica	tion of Pla	ņks	
Section '	1 - Portion MQ1													!						
	1 (Bays A - B)										1									
	rk & Removal of Existing Seawall										1			I I						
SW.1.3023	Bay B- Excavation Within MQ1 (22000m3)	35	11/04/11	11/04/11	15/05/11	15/05/11	0	0	Ва	ay B-I	Exca	ation	Within	MQ1	(22000	)m3)				
New Seawall	Construction										į									
SW.1.4020	Bay A - Secondary Armour 0.16T - 0.25T(2500m3)	21	01/05/11	01/05/11	21/05/11	21/05/11	0	0		<b>V</b> Bạy	A - S	econd	ary Ar	mour	0.16T	- 0.25T(	2500m3	3)		
SW.1.4030	Bay A - Primary Armour 2.3T (1500m3)	21	15/05/11	15/05/11	04/06/11	04/06/11	0	0				_	-	1		2.3T (1		11		
SW.1.4040	Bay A - Scour Protection Layer (3250m3)	70	05/06/11	21/02/12	13/08/11	30/04/12	261	261	<b>.</b>					, -				11	Bay A	Scour Pro
SW.1.4050	Bay B - Filter 1 (2000 m3)	11	16/05/11	16/05/11	26/05/11	26/05/11	0	0			Bay E	3 - Filte	er 1 (20	000 m	3)					
SW.1.4060	Bay B - Filter 2 (2000 m3)	10	27/05/11	27/05/11	05/06/11	05/06/11	0	0		_		Bay	B - Fili	ter 2 (	2000 n	n3)				
SW.1.4070	Bay B - Secondary Armour 0.16T - 0.25T (2500m3)	21	30/05/11	30/05/11	19/06/11	19/06/11	0	0				_	<b>T</b>	Зау В	- Şeco	ndary A	rmour	0.16T - 0.2	5T (250	)m3)
SW.1.4080	Bay B - Primary Armour 2.3T (1500m3)	21	13/06/11	13/06/11	03/07/11	03/07/11	0	0			l į				Ва	y B - Pri	mary A	rmour 2.3	T (1500n	n3)
SW.1.4090	Bay B - Scour Protection Layer (3250m3)	70	04/07/11	21/02/12	11/09/11	30/04/12	232	232	Bay B - Sco	our Pr	otect	ion La	yer (32	250m3				11		1. 1
<b>RC Deck Con</b>	struction										l i	7		1						
SW.1.5000	Bay A - Erection of Suspension Working Platform	28	05/06/11	05/06/11	02/07/11	02/07/11	0	0			4				Bay	A - Ere	ction o	Suspens	ion Wor	king Platfor
SW.1.5005	Bay A - Formwork	30	03/07/11	03/07/11	01/08/11	01/08/11	0	0			l i			1			i i	🤻 Bay A	Formw	ork
SW.1.5010	Bay A - Rebar Fixing	30	02/08/11	02/08/11	31/08/11	31/08/11	0	0			li			1	Bay A	A - Rebai	Fixing		1	
SW.1.5045	Bay B - Erection of Suspension Working Platform	28	04/07/11	04/07/11	31/07/11	31/07/11	0	0			l i			1			1		Frection	of Suspen
SW.1.5050	Bay B - Formwork	30	01/08/11	01/08/11	30/08/11	30/08/11	0	0			i			<u> </u>	Bay	B - For			, y	
SW.1.5055	Bay B - Rebar Fixing	30	24/08/11	24/08/11	22/09/11	22/09/11	0	0			i			1			Bay	B - Rebar	Fixing	
Miscellaneou											l i		- ▼	ŀ	_					
SW.1.6000	Bay B - Construction of 600 Dia. Outfall	14	20/06/11	18/07/11	03/07/11	31/07/11	28	28			i				∕ Ba	y B - Co	nstruct	ion of 600	Dia. Ou	tfall
Section 2	2 - Portions MQ2, LS1, LS2, SDA & DZA										1									
Portion MQ	2 (Bays C - G), LS1 & LS2										1			į						
Piling Work	(Bays C - G, LS1 & LS2)													I I						
Pipe Pile for	Quay Structure													I I						
SW.2.1330	Bay G - Infill Concrete (33 nos.)	49	28/03/11	18/04/11	15/05/11	05/06/11	21	0	Ba	ay G -	Infill	Concr	ete (33	nos.						
<b>Precast Fron</b>	t Panels (PFP) & Capping Beam													I I						
SW.2.1555	Bay E - Construction of Capping Beam	28	20/04/11	08/06/11	17/05/11	05/07/11	49	0	E	Зау Ė	- Con	struct	ion of	Capp	ng Be	am				
SW.2.1565	Bay F -Installation of PFP & Infill Concrete	35	26/04/11	07/06/11	30/05/11	11/07/11	42	0			<mark>V</mark> Ва	ıy F -In	stallat	ion of	PFP 8	& Infill C	oncret	e		
SW.2.1575	Bay F - Construction of Capping Beam	28	31/05/11	12/07/11	27/06/11	08/08/11	42	0						<u> </u>	3ay F -	Constru	uction	of Cappin	Beam	
SW.2.1580	Bay G - ELS for PFP	14	16/05/11	06/06/11	29/05/11	19/06/11	21	0	<b>V</b>	v	✓ Ba	y G - E	LS for	PFP	•	7	▼		<u> </u>	▼
		Early Bar	KTWP					Shee	et 2 of 5 Start D	Date				30	/11/09	)				
		Progress	<b>I</b>	Penta	-Ocean Cons	struction Co.	, Ltd.		Finish							Date 02/12/10	L	Revision		ckedApprovec M WT
		Critical A	l l	٥٦٦	DD Contract I	No. KI /2000	/O1		Data D					30	/11/09	02/12/10	J			IVI VV I
			Site		or Kai Tak Cı			lopme	I				23/		12:24					
					olling Program															
?Primavera Systems, Inc.																				
: [ ] [	iavora Gystems, mc.																			

Activity	Activity	Orig	Early	Late	Early	Late	Total Fre	MAY IIIN IIII AIIG SEDII		
ID	Description	Dur	Start	Start	Finish	Finish	Float Float	<sup>oat</sup> 2 9 16 23 30 6 13 20 27 4 11 18 25 1 8 15 22 29 5		
SW.2.1585	Bay G -Installation of PFP & Infill Concrete	35	27/05/11	17/06/11	30/06/11	21/07/11	21	Bay G -Installation of PFP & Infill Concrete		
SW.2.1595	Bay G - Construction of Capping Beam	28	24/06/11	15/07/11	21/07/11	11/08/11	21	Bay G - Construction of Capping E		
Temp. Piling I								<u> </u>		
SW.2.2520	Bay E - Excavate Down to Bracing Level	14	08/05/11	26/06/11	21/05/11	09/07/11	49	Bay E - Excavate Down to Bracing Level		
SW.2.2525	Bay E - Install Pile Bracing	21	22/05/11	10/07/11	11/06/11	30/07/11	49	0 Bay E - Install Pile Bracing		
SW.2.2530	Bay F - Excavate Down to Bracing Level	14	28/06/11	09/08/11	11/07/11	22/08/11	42	0 Bay F - Excavate Down to Bracing Level		
SW.2.2535	Bay F - Install Pile Bracing	21	12/07/11	23/08/11	01/08/11	12/09/11	42	0 Bay F - Install Pile Bracing		
SW.2.2540	Bay G - Excavate Down to Bracing Level	14	22/07/11	12/08/11	04/08/11	25/08/11	21	0 Bay G - Excavate Down to Bracing Level		
SW.2.2545	Bay G - Install Pile Bracing	21	05/08/11	26/08/11	25/08/11	15/09/11	21	0 Bay G - Install Pile Bracing		
<b>Dredging Wor</b>	k & Removal of Existing Seawall									
SW.2.2910	Install Silt Curtain System (Bay E)	7	22/05/11	10/07/11	28/05/11	16/07/11	49	0 Install Silt Curtain System (Bay E)		
SW.2.2915	Install Silt Curtain System (Bay F)	7	12/07/11	06/09/11	18/07/11	12/09/11		14 Install Silt Curtain System (Bay F)		
SW.2.2920	Install Silt Curtain System (Bay G)	7	05/08/11	09/09/11	11/08/11	15/09/11		Install Silt Curtain System (Bay G)		
SW.2.3010	Bay C - Excavation Within MQ2 (22000m3)	35	16/04/11	09/06/11	20/05/11	13/07/11	54	Bay C - Excavation Within MQ2 (22000m3)		
SW.2.3025	Bay D - Existing Seawall Rockfill (16500m3)	35	02/05/11	21/06/11	05/06/11	25/07/11	50	Bay D - Existing Seawall Rockfill (16500m3)		
SW.2.3030	Bay D - Excavation Within MQ2 (22000m3)	35	23/05/11	12/07/11	26/06/11	15/08/11	50	Bay D - Excavation Within MQ2 (22000m3)		
SW.2.3035	Bay D - Remove Abandoned Submarine Outfall	7	06/06/11	09/08/11	12/06/11	15/08/11		14 Bay D - Remove Abandoned Submarine Outfall		
SW.2.3040	Bay E - Existing Seawall Armour (4500m3)	21	29/05/11	17/07/11	18/06/11	06/08/11	49	Bay E - Existing Seawall Armour (4500m3)		
SW.2.3045	Bay E - Existing Seawall Rockfill (16500m3)	35	12/06/11	31/07/11	16/07/11	03/09/11	49	0 Bay E - Existing Seawall Rockfill (165)		
SW.2.3050	Bay E - Excavation Within MQ2 (22000m3)	35	03/07/11	21/08/11	06/08/11	24/09/11	49	0 Bay E - Excavation Within MQ2 (22000m3)		
SW.2.3060	Bay F - Existing Seawall Armour (4500m3)	21	02/08/11	13/09/11	22/08/11	03/10/11	42	0 Bay F - Existing Seawall Armour (4500m3)		
SW.2.3065	Bay F - Existing Seawall Rockfill (16500m3)	35	16/08/11	29/09/11	19/09/11	02/11/11	44	0 Bay F - Existing Seawall Rockfill (16500m3)		
SW.2.3080	Bay G - Existing Seawall Armour (4500m3)	21	26/08/11	16/09/11	15/09/11	06/10/11	21	0 Bay G - Existing Seawall Armour (4500m3)		
New Seawall								<u> </u>		
SW.2.4000	Bay C - Filter 1 (2000m3)	11	21/05/11	14/07/11	31/05/11	24/07/11	54	0 Bay C - Filter 1 (2000m3)		
SW.2.4005	Bay C - Filter 2 (2000m3)	10	01/06/11	25/07/11	10/06/11	03/08/11	54	0 Bay C - Filter 2 (2000m3)		
SW.2.4010	Bay C - Secondary Armour 0.16T ~ 0.25T (2500m3)	21	04/06/11	28/07/11	24/06/11	17/08/11	54	0 Bay C - Secondary Armour 0.16T ~ 0.25T (2500m3)		
SW.2.4015	Bay C - Primary Armour 2.3T (1500m3)	21	18/06/11	11/08/11	08/07/11	31/08/11	54	0 Bay C - Primary Armour 2.3T (1500m3)		
SW.2.4020	Bay D - Filter 1 (2000m3)	11	27/06/11	16/08/11	07/07/11	26/08/11	50	0 Bay D - Filter 1 (2000m3)		
SW.2.4025	Bay D - Filter 2 (2000m3)	10	08/07/11	27/08/11	17/07/11	05/09/11	50	0 Bay D - Filter 2 (2000m3)		
SW.2.4030	Bay D - Secondary Armour 0.16T ~ 0.25T (2500m3)	21	11/07/11	30/08/11	31/07/11	19/09/11	50	0 Bay D - Secondary Armour		
SW.2.4035	Bay D - Primary Armour 2.3T (1500m3)	21	25/07/11	13/09/11	14/08/11	03/10/11	50	0 Bay D - Primary Armour 2.3T (1500m3)		
SW.2.4040	Bay E - Filter 1 (2000m3)	11	07/08/11	25/09/11	17/08/11	05/10/11	49	0 Bay E - Filter 1 (2000m3)		
SW.2.4045	Bay E - Filter 2 (2000m3)	10	18/08/11	06/10/11	27/08/11	15/10/11	49	0 Bay E - Filter 2 (2000m3)		
SW.2.4050	Bay E - Secondary Armour 0.16T ~ 0.25T (2500m3)	21	21/08/11	09/10/11	10/09/11	29/10/11	49	0 Bay E - Secondary Armour 0.16T ~ 0.25T (2500m3)		
SW.2.4100	Bay C to G -Scour Protection Layer (16250 m3)	240	09/07/11	04/02/12	04/03/12	30/09/12	210 21	Bay C to G -Scour Protection Layer (16250 m3)		
RC Deck Con										
SW.2.5000	Bay C - Erection of Suspension Working Platform	28	13/08/11	06/10/11	09/09/11	02/11/11	54 5	Bay C - Erection of Suspension Working Platform		
Miscellaneou					T	ı		<u> </u>		
SW.2.6000	Bay D- Construction of 600 Dia. Outfall	14	15/08/11	08/11/11	28/08/11	21/11/11	85 3	Bay D- Construction of 600 Dia. Outfall		
		Early Ba	. KTWP				S	Sheet 3 of 5 Start Date 30/11/09		
	<del></del>	Progress	I	Penta	a-Ocean Con	struction Co.	, Ltd.	Finish Date 24/12/13 <u>Date Revision CheckedApprovec</u> 02/12/10 J TM WT		
Critical Activity CEDD Contract No. KL/2009/01 Data Date 30/11/09										
			Site		or Kai Tak C			oment Run Date 23/05/11 12:24		
					olling Progra					
?Prim	?Primavera Systems, Inc.									
rriinavera Systems, inc.										

