

**Entrusted Portion of Widening of Tolo Highway /
Fanling Highway between Island House Interchange
and Fanling Stage 2**

Monthly EM&A Report

November 2013

Submitted to

Environmental Protection Department

Meinhardt Infrastructure and Environment Limited

**Entrusted Portion of Widening of Tolo
Highway / Fanling Highway between Island
House Interchange and Fanling Stage 2**

Monthly EM&A Report

(November 2013)

Certified by: Fredrick Leong 

Position: Environmental Team Leader

Date: 12 December 2013



Our ref AFK/TK/jn/bw/T329380/22.05/L-0001

T 2828 5919

E terence.kong@mottmac.com.hk

Your ref

Hyder-Arup-Black & Veatch Joint Venture
c/o Hyder Consulting Limited
47/F Hopewell Centre
183 Queen's Road East
Wanchai, Hong Kong

13 December 2013
By Fax (2805 5028) & Post

Dear Sir,

Attn: Mr. James Penny

**EM&A for Widening of Tolo Highway/Fanling Highway between Island House Interchange and Fanling Stage 2 (between Tai Hang to Wo Hop Shek Interchange) – Entrusted Works
Environmental Permit No. EP-324/2008/A
Condition 3.3 – Submission of Monthly EM&A Report - November 2013 for the portion of Stage 2 works entrusted to CEDD under Contract No. CV/2012/09**




We refer to the revised Monthly EM&A Report - November 2013 received on 11 December 2013 submitted by ET via email. Pursuant to EP Condition 3.3, I hereby verify the Monthly EM&A Report – November 2013 (Rev. 0) for the portion of works under Stage 2 of the captioned Project which is entrusted to CEDD under Contract No. CV/2012/09.

Yours faithfully
for MOTT MACDONALD HONG KONG LIMITED

A handwritten signature in black ink, appearing to read 'Terence Kong'.

Terence Kong
Independent Environmental Checker

c.c. HyD – Mr. Chung Lok Chin (Fax: 2714 5198) / Ms. Jackei Yin (Fax: 2761 4864)
CEDD/BCP – Mr. Chris Wong / Mr. Desmond Lam (Fax: 2714 0103)
AECOM – Mr. Alan Lee (Fax: 3922 9797)
Meinhardt Infrastructure and Environment Limited – Mr. Fredrick Leong (Fax: 2540 1580)

Date	Revision	Prepared By	Checked By	Approved By
12 December 2013	0	Amy WONG Arthur LO Jodi LI	Fredrick LEONG	Helen COCHRANE
				

Contents

EXECUTIVE SUMMARY	iv
1.0 INTRODUCTION	1
1.1 Purpose of the Report.....	1
1.2 Report Structure	1
2.0 PROJECT INFORMATION	2
2.1 Background.....	2
2.2 Site Description.....	2
2.3 Construction Programme and Activities	3
2.4 Project Organisation	3
2.5 Status of Environmental Licenses, Notification and Permits.....	4
3.0 AIR QUALITY MONITORING	5
3.1 Monitoring Requirement.....	5
3.2 Monitoring Equipment	5
3.3 Monitoring Location.....	5
3.4 Monitoring Parameters, Frequency and Duration	6
3.5 Monitoring Methodology.....	6
3.6 Monitoring Schedule for the Reporting month	7
3.7 Monitoring Results	7
4.0 NOISE MONITORING	8
4.1 Monitoring Requirements	8
4.2 Monitoring Equipment	8
4.3 Monitoring Locations.....	8
4.4 Monitoring Parameters, Frequency and Duration.....	8
4.5 Monitoring Methodology.....	9
4.6 Monitoring Schedule for the Reporting Month	9
4.7 Monitoring Results	9
5.0 WATER MONITORING	11
5.1 Monitoring Requirements	11
5.2 Monitoring Equipment.....	11
5.3 Monitoring Parameters, Frequency and Duration.....	11
5.4 Monitoring Locations.....	11
5.5 Monitoring Methodology.....	12
5.6 Monitoring Schedule for the Reporting Month	12
5.7 Monitoring Results	12
6.0 WASTE MANAGEMENT	14

7.0 ENVIRONMENTAL SITE INSPECTION AND AUDIT	15
7.1 Site Inspection	15
8.0 IMPLEMENTATION STATUS OF ENVIRONMENTAL MITIGATION MEASURES	17
9.0 ENVIRONMENTAL NON-CONFORMANCE	18
9.1 Summary of Monitoring Exceedances	18
9.2 Summary of Environmental Non-Compliance.....	18
9.3 Summary of Environmental Complaints	18
9.4 Summary of Environmental Summon and Successful Prosecutions	18
10.0 FUTURE KEY ISSUES	19
10.1 Construction Programme for the Next Month	19
10.2 Key Issues for the Coming Month	19
10.3 Monitoring Schedule for the Next Month	19
11.0 CONCLUSIONS AND RECOMMENDATIONS	20
11.1 Conclusions	20
11.2 Recommendations	20

List of Tables

Table 2.1	Contact Information of Key Personnel
Table 2.2	Status of Environmental Licenses, Notifications and Permits
Table 3.1	Air Quality Monitoring Equipment
Table 3.2	Location of Air Quality Monitoring
Table 3.3	Air Quality Monitoring Parameters, Frequency and Duration
Table 3.4	Summary of 1-hr TSP Monitoring Results
Table 3.5	Summary of 24-hr TSP Monitoring Results
Table 4.1	Noise Monitoring Equipment
Table 4.2	Location of Noise Monitoring
Table 4.3	Noise Monitoring Parameters, Frequency and Duration
Table 4.4	Summary of Noise Monitoring Results
Table 5.1	Water Quality Monitoring Equipment
Table 5.2	Water Quality Monitoring Parameters, Frequency and Duration
Table 5.3	Locations of Water Quality Monitoring
Table 5.4	Action and Limit Levels for Water Quality Monitoring
Table 7.1	Observations and Recommendations of Site Audit
Table 8.1	Status of Required Submission under Environmental Permit

List of Figures

Figure 1	Demarcation of Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling – Stage 2
Figure 2	Air and Noise Monitoring Locations
Figure 3	Water Quality Monitoring Locations

List of Appendices

Appendix A	Construction Programme
Appendix B	Project Organization Structure
Appendix C	Calibration Certificates of Monitoring Equipment
Appendix D	EM&A Monitoring Schedules
Appendix E	Air Quality Monitoring Results and their Graphical Presentation
Appendix F	Summary of Event and Action Plan
Appendix G	Noise Monitoring Results and their Graphical Presentation
Appendix H	Laboratory Results for Water Quality
Appendix I	Water Quality Monitoring Results and their Graphical Presentation
Appendix J	Waste Flow Table
Appendix K	Implementation Schedule of Environmental Mitigation Measures (EMIS)
Appendix L	Investigation Report for Exceedances
Appendix M	Statistics on Complaints, Notifications of Summons and Successful Prosecutions

EXECUTIVE SUMMARY

The Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2 (hereafter called “the Project”) covers part of the construction of the widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling which aimed to widen Tolo Highway and Fanling Highway to dual 4-lane carriageway in order to alleviate the current traffic congestion problems and to cope with the increasing transport demands to and from the urban areas and also cross boundary traffic. The Project covers construction activities at Yuen Leng along the existing Fanling Highway.

The impact EM&A for the Project includes air quality, noise and water quality monitoring. The EM&A programme commenced on 5 November 2013.

This report documents the findings of EM&A works conducted in the period between 5 and 30 November 2013. As informed by the Contractor, the major activities in the reporting period were:

- Hoarding and fencing erection, initial survey and base slab demolition;
- Site clearance and tree felling;
- Excavation works and base slab demolition;
- Pre-drilling works; and
- Box culvert extension works – Flow diversion of existing stream, base and wall slab construction.

Breach of Action and Limit Levels for Air Quality

Two (2) Action Level exceedances of 24-hour TSP monitoring were recorded on 16 and 22 November 2013 while one (1) Limit Level exceedance was recorded on 28 November 2013 at the monitoring location (SR77) in the reporting month. Investigation reports of the exceedances are being prepared, and it will be reported during next reporting period.

No exceedance of Action and Limit Level was recorded for 1-hour TSP monitoring at the monitoring location (SR77) in the reporting month.

Breach of Action and Limit Levels for Noise

No Action Level exceedance was recorded since no noise related complaint was received in the reporting month.

No exceedance of Limit Level of noise was recorded at the monitoring location (SR77) in the reporting month.

Breach of Action and Limit Levels for Water Quality

Two (2) exceedances of water quality limit (i.e. Action Level) of DO were recorded on 9 and 18 November 2013 at the impact monitoring location (I5) in the reporting month. Investigation of the exceedances had been conducted which concluded that the exceedances were not due to the Project works. The investigation reports are presented in **Appendix L**.

Complaint, Notification of Summons and Successful Prosecution

A complaint regarding water quality of Ma Wat River was received on 26 November 2013. The ET had conducted investigation for the complaint which was considered as an invalid complaint under this Project.

Reporting Change

There was no reporting of change recorded in this reporting month.

Future Key Issues

Key issues to be considered in the coming month are anticipated to include:

- Hoarding and fencing erection, initial survey and base slab demolition;
- Site clearance and tree felling;
- Excavation works and base slab demolition;
- Pre-drilling works; and
- Box culvert extension works – Flow diversion of existing stream, base and wall slab construction.

Potential environmental impacts arising from the above construction activities are anticipated to be mainly associated with construction dust, noise, water quality and waste management.

1.0 INTRODUCTION

Chun Wo Construction & Engineering Co Ltd (Chun Wo) was commissioned by the Civil Engineering and Development Department (CEDD) as the Civil Contractor for the Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2. Meinhardt Infrastructure & Environment Ltd (MIEL) has been appointed by Chun Wo as the Environmental Team (ET) to fulfill the corresponding EM&A requirements pursuant to Environmental Permit No. EP-324/2008/A in accordance with the Updated EM&A Manual (dated October 2013) for Widening of Tolo Highway/Fanling Highway between Island House Interchange and Fanling Stage 2. The EM&A programme commenced in 5 November 2013.

1.1 Purpose of the Report

1.1.1 This is the first monthly EM&A Report which summaries the impact monitoring results and audit findings for the Project during the reporting period from 5 to 30 November 2013.

1.2 Report Structure

1.2.1 This monthly EM&A Report comprises the following sections:

- Section 1: Introduction
- Section 2: Project Information
- Section 3: Air Quality Monitoring
- Section 4: Noise Monitoring
- Section 5: Water Monitoring
- Section 6: Waste Management
- Section 7: Environmental Site Inspection and Audit
- Section 8: Implementation Status of Environmental Mitigation Measures
- Section 9: Environmental Non-conformance
- Section 10: Future Key Issues
- Section 11: Conclusions and Recommendations

2.0 PROJECT INFORMATION

2.1 Background

2.1.1 Tolo Highway and Fanling Highway are expressways in the North East New Territories connecting Sha Tin, Tai Po and Fanling. These highways form a vital part of the strategic Route 1, which links Hong Kong Island to Shenzhen. At present, this section of Route 1 is a dual 3-lane carriageway. However, at several major interchanges along this section of Route 1, the highway is only dual-2 lane. Severe congestion is a frequent occurrence during peak periods, particularly in the Kowloon bound direction.

2.1.2 The objective of the Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling is to widen Tolo Highway and Fanling Highway to dual 4-lane carriageway in order to alleviate the current traffic congestion problems and to cope with the increasing transport demands to and from the urban areas and also cross boundary traffic.

2.1.3 The construction works for the Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling are to be delivered in 2 stages:

- Stage 1 – Construction works between Island House Interchange and Tai Hang; and
- Stage 2 – Construction works between Tai Hang and Wo Hop Shek Interchange.

2.1.4 The construction works of Stage 1 under the EP commenced in November 2009 and was planned to be completed in December 2013 tentatively. The works of Stage 2 was planned to commence in November 2013 and complete by end of 2016. Hyder-Arup-Black and Veatch Joint Venture (HABVJV) was appointed by the Highways Department (HyD) as the consultants for the design and construction assignment for the Project. Mott MacDonald Hong Kong Ltd is the Independent Environmental Checker (IEC) of both Stage 1 and Stage 2 works.

2.1.5 A portion of Stage 2 works of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling (hereafter called “the Project”) is entrusted to the contractor of Contract No. CV/2012/09 Liantang / Heung Yuen Wai Boundary Control Point Site Formation and Infrastructure Works Contract 3, i.e. Chun Wo. AECOM Asia Co Ltd was appointed by the CEDD as the consultant for the design and construction assignment for the Liantang development.

2.1.6 The Project is a Designated Project under the Environmental Impact Assessment Ordinance (EIAO) (Cap. 499). An Environmental Impact Assessment (EIA) Report together with an Environmental Monitoring and Audit (EM&A) Manual were approved on 14 July 2000 (Register Number: EIA-043/2000). The Project is governed by an Environmental Permit (EP) (EP-324/2008) which was granted on 23 December 2008. A variation of EP (VEP) was applied and a VEP (EP-324/2008/A) was subsequently granted on 31 January 2012.

2.2 Site Description

2.2.1 The major construction activities under the Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2 include:

- At-Grade Road Works – Temporary and permanent road formation, pipe laying, road drainage, footpath and noise barrier construction;
- Demolition of existing Kiu Tau Footbridge and Footbridge Re-provision; and
- Box Culvert Extension – Flow diversion of existing stream, excavation, sub-base and blinding, base, wall and top slab construction.

2.2.2 **Figure 1** shows the works areas for the Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2.

2.3 Construction Programme and Activities

2.3.1 The major construction activities undertaken in the reporting month are summarized below:

- Hoarding and fencing erection, initial survey and base slab demolition;
- Site clearance and tree felling;
- Excavation works and base slab demolition;
- Pre-drilling works; and
- Box culvert extension works – Flow diversion of existing stream, base and wall slab construction.

2.3.2 The construction programme is presented in **Appendix A**.

2.4 Project Organisation

2.4.1 The project organization structure is shown in **Appendix B**. The key personnel contact names and numbers for the Project are summarised in **Table 2.1**.

Table 2.1 Contact Information of Key Personnel

Party	Role	Position	Name	Telephone	Fax
AECOM	Engineer's Representative	Senior Resident Engineer	Mr. Alan Lee	2472 7228	2472 0132
		Resident Engineer (Environmental)	Mr. Perry Yam	2674 2273	--
Mott MacDonald	Independent Environmental Checker (IEC)	IEC	Mr. Terence Kong	2828 5919	2827 1823
Chun Wo	Contractor	Site Agent	Mr. Daniel Ho	2638 6144	2638 7077
		Environmental Officer	Mr Victor Huang	2638 6115	
		Environmental Officer	Mr Sam Lam	2638 6147	
Meinhardt	Environmental Team (ET)	ET Leader	Mr. Fredrick Leong	2859 1739	2540 1580

2.5 Status of Environmental Licenses, Notification and Permits

2.5.1 The relevant environmental licenses, permits and/or notifications on environmental protection for this Project and valid in the reporting month are summarized in **Table 2.2**.

Table 2.2 Status of Environmental Licenses, Notifications and Permits

Permit / License No. / Notification/ Reference No.	Valid Period		Status	Remarks
	From	To		
<i>Environmental Permit</i>				
EP-324/2008/A	31 Jan 2012	--	Valid	--
<i>Construction Noise Permit</i>				
GW-RN0663-13	17 Nov 2013	19 Jan 2014	Valid	For a section of Fanling Highway (slow lane)
<i>Wastewater Discharge License</i>				
WT00016832-2013	28 Aug 2013	31 Aug 2018	Valid	--
<i>Chemical Waste Producer Registration</i>				
5113-634-C3817-01	7 Oct 2013	--	Valid	--
<i>Billing Account for Construction Waste Disposal</i>				
7017914	2 Aug 2013	--	Account Active	--
<i>Notification Under Air Pollution Control (Construction Dust) Regulation</i>				
--	31 Jul 2013	30 Jul 2019	Notified	--

3.0 AIR QUALITY MONITORING

3.1 Monitoring Requirement

3.1.1 In accordance with the Updated EM&A Manual, 1-hr and 24-hr total suspended particulate (TSP) levels at the designated air quality monitoring station are required. Impact 24-hour TSP monitoring should be carried out for at least once every 6 days. For the 1-hr TSP impact monitoring, the sampling frequency of at least three times in every 6 days should be undertaken when the highest dust impact occurs.

3.2 Monitoring Equipment

3.2.1 The 24-hr TSP air quality monitoring was performed using a High Volume Sampler (HVS), of which its location and operation satisfy, as far as practicable, all the requirements as specified in the Updated EM&A Manual. A portable direct reading dust meter, which was proven to be capable of achieving comparable results as that of the HVS, was used to carry out the 1-hr TSP monitoring. The brand and model of the equipment are given in **Table 3.1**.

Table 3.1 Air Quality Monitoring Equipment

Equipment	Brand and Model	Quantity	Serial Number
Portable direct reading dust meter (1-hr TSP)	Sibata Digital Dust Monitor (Model No. AM 510)	1	11302029
High Volume Sampler (24-hr TSP)	Tisch Total Suspended Particulate Mass Flow Controlled High Volume Air Sampler (Model No. TE-5170 MFC)	1	2359

3.2.2 The HVS and its accessories were maintained in good working condition, such as replacing motor brushes routinely and checking electrical wiring to ensure a continuous power supply.

3.2.3 Calibration of the HVS (five point calibration) using Calibration Kit was carried out every two months. The HVS calibration orifice and the portable direct reading dust meter will be calibrated annually. Calibration certificate of the TE-5025A Calibration Kit, the portable direct reading dust meter and the HVS are provided in **Appendix C**.

3.3 Monitoring Location

3.3.1 Air quality monitoring was conducted at the location specified in the Updated EM&A Manual. **Table 3.2** describes the details of the air quality monitoring station with its location as shown in **Figure 2**.

Table 3.2 Location of Air Quality Monitoring

Air Monitoring Station ID	Monitoring Location	Description
AM1 ⁽¹⁾ ; SR77 ⁽¹⁾	Yuen Leng 2 ⁽¹⁾	Residential, Ground floor

Remark:

(1) Location / Station / ASR ID as identified in Updated EM&A Manual / EIA Report for Widening of Tolo Highway/Fanling Highway between Island House Interchange and Fanling

3.4 Monitoring Parameters, Frequency and Duration

3.4.1 **Table 3.3** summarizes the monitoring parameters, frequency and duration of impact TSP monitoring.

Table 3.3 Air Quality Monitoring Parameters, Frequency and Duration

Parameter	Frequency and Duration
1-hour TSP	At least three times in every 6 days should be undertaken when the highest dust impact occur
24-hour TSP	Once every 6 days

3.5 Monitoring Methodology

24-hr TSP Monitoring

3.5.1 With the consideration of criteria stated in the Updated EM&A Manual, the HVS was installed in the vicinity of the air sensitive receivers.

3.5.2 The relevant data including temperature, pressure, weather conditions, elapsed-time meter reading for the start and stop of the sampler, identification and weight of the filter paper, and any special phenomena observed were recorded. The weather information was referenced from Hong Kong Observatory (<http://www.weather.gov.hk/wxinfo/pastwx/extractc.htm>).

3.5.3 A HOKLAS accredited laboratory, ALS Technichem (HK) Pty Ltd (HOKLAS no.: 066), with constant temperature and humidity control, and equipped with necessary measuring and conditioning instruments, to handle the 24-hr TSP samples, was employed for sample analysis, and equipment calibration and maintenance.

3.5.4 Filter papers of size 8"x10" were labelled before sampling. They were inspected to be clean with no pin holes and conditioned in a humidity controlled chamber for over 24-hr and were pre-weighed before use for the sampling.

3.5.5 The 24-hr TSP levels were measured by following the standard high volume sampling method for TSP as set out in the Title 40 of the United States Code of Federal Regulations, Chapter 1 (Part 50), Appendix B. TSP was sampled by drawing air through a conditioned, pre-weighted filter paper inside the HVS at a controlled air flow rate. After 24-hr sampling, the filter papers loaded with dust were kept in a clean and tightly sealed plastic bag, and then returned to the laboratory for reconditioning in the humidity controlled chamber followed by accurate weighing by an electronic balance with a readout down to 0.1 mg.

3.5.6 All the collected samples were kept in a good condition for 6 months before disposal.

1-hr TSP Monitoring

3.5.7 The 1-hr TSP measurement followed manufacturer's instruction manual. Before initiating a measurement, zeroing the portable dust monitor was carried out to ensure maximum accuracy of concentration measurements.

3.5.8 The 1-hr TSP was sampled by drawing air into the portable dust monitor where particular concentrations were measured instantaneously with an in-built silicon detector sensing light scattered by the particulates in the sampled air. Continuous TSP levels were indicated and logged by a built-in data logger compatible with Windows based program to facilitate data collection, analysis and reporting.

3.6 Monitoring Schedule for the Reporting month

3.6.1 The schedule for environmental monitoring in November 2013 is provided in **Appendix D**.

3.7 Monitoring Results

3.7.1 The monitoring results for 1-hr and 24-hr TSP are summarised in **Tables 3.4** and **3.5** respectively. Detailed air quality monitoring results and graphical presentation of air quality monitoring data are presented in **Appendix E**.

Table 3.4 Summary of 1-hr TSP Monitoring Results

1-hr TSP Levels	Average ($\mu\text{g}/\text{m}^3$)	Range ($\mu\text{g}/\text{m}^3$)	Action Level ($\mu\text{g}/\text{m}^3$)	Limit Level ($\mu\text{g}/\text{m}^3$)
SR77 (AM1) ⁽¹⁾	112.7	83.0 – 155.0	292.7	500

Remark:

(1) Station / ASR ID as identified in Updated EM&A Manual / EIA Report for Widening of Tolo Highway/Fanling Highway between Island House Interchange and Fanling

Table 3.5 Summary of 24-hr TSP Monitoring Results

ASR ID	Average ($\mu\text{g}/\text{m}^3$)	Range ($\mu\text{g}/\text{m}^3$)	Action Level ($\mu\text{g}/\text{m}^3$)	Limit Level ($\mu\text{g}/\text{m}^3$)
SR77 (AM1) ⁽¹⁾	163.4	61.1 – 282.2	170.3	260

Remark:

(1) Station / ASR ID as identified in Updated EM&A Manual / EIA Report for Widening of Tolo Highway/Fanling Highway between Island House Interchange and Fanling

3.7.2 Two (2) Action Level exceedances of 24-hour TSP monitoring were recorded on 16 and 22 November 2013 while one (1) Limit Level exceedance was recorded on 28 November 2013 at the monitoring location (SR77) in the reporting month. Investigation reports of the exceedances are being prepared, and it will be reported during next reporting period.

3.7.3 No exceedance of Action and Limit Level was recorded for 1-hour TSP monitoring at the monitoring location (SR77) in the reporting month.

3.7.4 The Event and Action Plan for the occurrence of non-compliance of the air quality criteria is annexed in **Appendix F**.

3.7.5 Details of influencing factors such as weather conditions and site observation are presented in **Appendix E**.

4.0 NOISE MONITORING

4.1 Monitoring Requirements

4.1.1 In accordance with the Updated EM&A Manual, the impact noise monitoring frequency shall depend on the scale of the construction activities. An initial guide on the regular monitoring frequency should be at least once per week when noise generating activities are underway.

4.2 Monitoring Equipment

4.2.1 Noise monitoring was performed using a sound level meter at the monitoring station. The sound level meter deployed complies with the International Electrotechnical Commission Publications 651:1979 (Type 1) and 804:1985 (Type 1) specifications. An acoustic calibrator was deployed to check the sound level meter at a known sound pressure level. The brand and model of the equipment is given in **Table 4.1**.

Table 4.1 Noise Monitoring Equipment

Equipment	Brand and Model	Quantity	Serial Number
Integrated Sound Level Meter	Rion (Model No. NL-52)	1	00220553
Acoustic Calibrator	B&K (Model No. 4231)	1	2685684

4.2.2 The sound level meter and acoustic calibrator were verified by the certified laboratory once every two years. Calibration certificates of the sound level meter and acoustic calibrator are provided in **Appendix C**.

4.3 Monitoring Locations

4.3.1 Impact noise monitoring was conducted at the location specified in the Updated EM&A Manual. **Table 4.2** describes the details of the noise monitoring station with its location as shown in **Figure 2**.

Table 4.2 Location of Noise Monitoring

Noise Monitoring Station ID	Monitoring Location	Description
M1 ⁽¹⁾ , SR77 ⁽¹⁾	Yuen Leng 2 ⁽¹⁾	Residential, Ground floor

Remark:

(1) Location / Station / NSR ID as identified in Updated EM&A Manual / EIA Report for Widening of Tolo Highway/Fanling Highway between Island House Interchange and Fanling

4.4 Monitoring Parameters, Frequency and Duration

4.4.1 **Table 4.3** summarizes the monitoring parameters, frequency and duration of impact noise monitoring.

Table 4.3 Noise Monitoring Parameters, Frequency and Duration

Parameter and Duration	Frequency
30-mins measurement at between 0700 and 1900 on normal weekdays. Leq, L10 and L90 would be recorded.	At least once per week

4.5 Monitoring Methodology

4.5.1 The monitoring procedures are summarised as below:

- (a) The microphone head of the sound level meter was positioned 1m exterior of the noise sensitive facade and lowered sufficiently so that the building’s external wall acts as a reflecting surface.
- (b) The battery condition was checked to ensure good functioning of the meter.
- (c) Parameters such as frequency weighting, the time weighting and the measurement time were set as follows:
 - (i) frequency weighting: A
 - (ii) time weighting: Fast
 - (iii) parameters: Leq, L10 and L90
 - (iv) time measurement: Leq(30-minutes) during non-restricted hours i.e. 07:00 – 1900 hrs on normal weekdays; Leq(5-minutes) during restricted hours i.e. 19:00 – 23:00 hrs and 23:00 – 07:00 hrs of normal weekdays, whole day of Sundays and Public Holidays
- (d) Prior to and after each noise measurement, the meter was calibrated using the acoustic calibrator for 94dB(A) at 1000 Hz. If the difference in the calibration level before and after measurement was more than 1dB(A), the measurement would be considered invalid and repeat of noise measurement would be required after re-calibration or repair of the equipment.
- (e) At the end of the monitoring period, the Leq, L10 and L90 were recorded. In addition, site conditions and noise sources were recorded on a standard record sheet.
- (f) A façade correction of +3dB (A) shall be made to the noise parameter obtained by free field measurement.

4.6 Monitoring Schedule for the Reporting Month

4.6.1 The schedule for environmental monitoring in November 2013 is provided in **Appendix D**.

4.7 Monitoring Results

4.7.1 The monitoring results for noise are summarized in **Table 4.4** and the monitoring data and the graphical presentation of noise level monitoring data are presented in **Appendix G**.

Table 4.4 Summary of Noise Monitoring Results

Noise Monitoring Station ID	Average, dB(A), $L_{eq(30min)}^{(2)}$	Range, dB(A), $L_{eq(30min)}^{(2)}$	Action Level	Limit Level, dB(A)
SR77 (M1) ⁽¹⁾	70.1	67.6 – 71.5	When one documented valid complaint is received	75

Remark:

(1) Station / NSR ID as identified in Updated EM&A Manual / EIA Report for Widening of Tolo Highway/Fanling Highway between Island House Interchange and Fanling

(2) +3dB(A) façade correction included

- 4.7.2 Major noise sources during the noise monitoring included construction activities of the Project and that along Tai Wo Service Road East, and nearby traffic noise.
- 4.7.3 No noise complaint was received in the reporting month; hence, no Action Level exceedance was recorded.
- 4.7.4 No Limit Level exceedance of noise was recorded in the reporting month.
- 4.7.5 The Event and Action Plan for the occurrence of non-compliance of the noise criteria is annexed in **Appendix F**.

5.0 WATER MONITORING

5.1 Monitoring Requirements

5.1.1 In accordance with the Updated EM&A Manual, during the course of the culvert extension works, monitoring shall be undertaken on three occasions per week. The interval between two sets of monitoring shall not be less than 36 hours except where there are exceedances of Action and/or Limit levels.

5.2 Monitoring Equipment

5.2.1 The equipment used in the water quality monitoring programme is summarised in **Table 5.1**.

Table 5.1 Water Quality Monitoring Equipment

Equipment	Model and Make
Multimeter (Scope of Test: Conductivity, Dissolved Oxygen, pH, Salinity and Temperature)	YSI ProPlus (Serial no. 10D101565)
Turbidity meter	HACH Model 2100 Q (Serial no. 12010C015757)

5.2.2 The monitoring instruments were checked, calibrated and certified by a laboratory accredited under HOKLAS before use and subsequently re-calibrated at 3-monthly intervals throughout all stages of the water quality monitoring. Copies of the calibration certificates for the water quality monitoring equipment are attached in **Appendix C**.

5.3 Monitoring Parameters, Frequency and Duration

5.3.1 Measurements for each monitoring station were conducted 3 days per week for 4 weeks between 5 November 2013 and 30 November 2013. **Table 5.2** summarises the monitoring parameters, frequency and duration of the baseline water quality monitoring.

Table 5.2 Water Quality Monitoring Parameters, Frequency and Duration

Monitoring Stations	Parameter, unit	Frequency
Control Stations: C3a and C3b Impact Station: I5	<ul style="list-style-type: none"> • Depth, m • Temperature, °C • Salinity, ppt • pH • DO, mg/L • DO Saturation, % • Turbidity, NTU • SS, mg/L 	3 days per week

5.4 Monitoring Locations

5.4.1 According to the Updated EM&A Manual, measurements were taken at all impact and control stations as summarised in **Table 5.3**. The locations of the monitoring stations are shown in **Figure 3**.

Table 5.3 Locations of Water Quality Monitoring

Station	Description	Easting	Northing
I5	Downstream of Ma Wat River (Yuen Leng)	833931	837859
C3a	Upstream of Ma Wat River (Nam Wa Po)	833816	837644
C3b	Upstream of Ma Wat River (Yuen Leng)	833931	837736

5.5 Monitoring Methodology

Instrumentation

5.5.1 The parameters of *in-situ* measurements included water depth, dissolved oxygen (DO), dissolved oxygen saturation (DOS), turbidity level, pH value and water temperature.

Operating/Analytical Procedures

5.5.2 Since water depths for all monitoring stations were less than 1m throughout the whole baseline measurement period, only mid-depth level was monitored.

5.5.3 At each monitoring station, at least duplicate readings of dissolved oxygen content and turbidity were taken. The probes were retrieved out of the water after the first measurement and then re-deployed for the second measurement.

5.5.4 Water samples were collected by the water sampler and filled into polyethylene bottles for laboratory determination of suspended solids. Sampling bottles were pre-rinsed with the same water samples, and filled up to the rim, capped tightly and labeled immediately. The sample bottles were then packed into a cool-box kept at 4°C, and delivered to a HOKLAS accredited laboratory, ALS Technichem (HK) Pty Ltd for analysis. The results for laboratory analysis of suspended solids are presented in **Appendix H**.

5.6 Monitoring Schedule for the Reporting Month

5.6.1 The schedule for environmental monitoring in November 2013 is provided in **Appendix D**.

5.7 Monitoring Results

5.7.1 The water quality criteria, namely Action and Limit Levels, as specified in the Updated EM&A Manual are shown in **Table 5.4**.

Table 5.4 Action and Limit Levels for Water Quality Monitoring

Parameters	Action	Limit
DO in mg/L	6.7 mg/L	4 mg/L or 40% saturation at 15 degree Celsius
SS in mg/L	42.6 mg/L or 120% of upstream control station's SS of the same day	46.8 mg/L or 130% of upstream station's SS of the same day and specific sensitive receiver water quality requirements
Turbidity (Tby) in NTU	81.9 mg/L or 120% of upstream control station's Tby of the same day	91.9 mg/L or 130% of upstream control station's Tby of the same day

Notes:

- (1) For DO, non-compliance of the water quality limits occurs when monitoring result is lower than the limits.
- (2) For SS and Tby, non-compliance of the water quality limits occurs when monitoring result is higher than the limits.

- 5.7.2 The detailed water quality monitoring results and graphical presentation of water quality monitoring data are presented in **Appendix I**.
- 5.7.3 The possible influences in monitoring results were suspected to be the domestic discharges, and possible erosion of silt after rainfall at up-stream locations.
- 5.7.4 Two (2) exceedances of water quality limit (i.e. Action Level) of DO were recorded on 9 and 18 November 2013 in the reporting month. Investigation of the exceedances had been conducted which concluded that the exceedances were not due to project works. The investigation reports for the incidents are presented in **Appendix L**.
- 5.7.5 The Event and Action Plan for the occurrence of non-compliance of the water quality criteria is annexed in **Appendix F**.

6.0 WASTE MANAGEMENT

- 6.1.1 The Contractor has registered as a chemical waste producer of the Project. The C&D materials and waste sorting were carried out on-site. Receptacles were provided for general refuse collection.
- 6.1.2 As advised by the Contractor, 878m³ of inert C&D materials was generated and disposed of at public fill to Tuen Mun Area 38, while 32,160kg of general refuse was disposed of at North East New Territories (NENT) Landfill. No paper/cardboard packaging, plastics and metals were collected by recycling contractor in the reporting month. 473m³ of inert C&D materials were reused on site. No chemical waste was collected by licensed contractor in the reporting period. Details of the waste management data are presented in **Appendix J**.
- 6.1.3 The Contractor was advised to properly maintain the on-site C&D materials and waste collection, sorting and recording system, and maximize the reuse/recycle of C&D materials and wastes. The Contractor was also reminded to properly maintain the site tidiness and dispose of wastes accumulated site regularly and properly.
- 6.1.4 The Contractor was reminded that chemical waste containers should be properly treated and stored temporarily in the designated chemical waste storage area on-site in accordance with the Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes.

7.0 ENVIRONMENTAL SITE INSPECTION AND AUDIT

7.1 Site Inspection

- 7.1.1 Site inspections were carried out on a weekly basis to monitor the implementation of proper environmental pollution control and mitigation measures for the Project. A summary of the site inspection is provided in **Appendix K**.
- 7.1.2 In the reporting month, 4 site inspections were carried out on 5, 13, 18 and 26 November 2013. The one held on 26 November 2013 was a joint inspection with the IEC, ER, ET and Contractor. No site inspection was conducted by the EPD during the reporting month. No non-compliance was recorded during the site inspection. A summary of the reminders and observations recorded during the site inspections are presented in **Table 7.1**.

Table 7.1 Observations and Recommendations of Site Audit

Parameters	Date	Observations and Recommendations	Follow-up
Water Quality	5 Nov 2013	<u>Reminder:</u> The Contractor was reminded to implement proper mitigation measures (e.g. sand bags) to avoid earth, mud and debris leaving the works area via storm water drainage (i.e. manholes).	The Contractor has blocked the manholes as observed during the ET weekly site inspection on 13 November 2013.
	13 Nov 2013	<u>Observation:</u> A few chemical drums were observed without drip tray. The Contractor should ensure the provision of drip tray to avoid spillage.	The Contractor has provided drip tray for the chemical drums as observed during the ET weekly site inspection on 18 November 2013.
	13 Nov 2013	<u>Reminder:</u> The Contractor was reminded to enhance the efficiency of the washed water collection channel for the wheel washing area.	The improvement of wheel washing facility was in progress, and the Contractor has provided sufficient sand bag as observed during the ET weekly site inspection on 18 November 2013.
	26 Nov 2013	<u>Observation:</u> A water pump at the box culvert works area was connected directly to the river. The Contractor should either remove the pump or connect it to water treatment facility before discharge.	The Contractor has removed the water pump which directly connected to the river as observed during the ET weekly site inspection on 04 December 2013.
	26 Nov 2013	<u>Observation:</u> An oil drum was observed without secondary containment. The Contractor should ensure the provision of drip trays for all chemical/oil containers.	The Contractor has provided drip tray for the chemical container as observed during the ET weekly site inspection on 04 December 2013.
	26 Nov 2013	<u>Reminder:</u> The Contractor was reminded to regularly inspect and maintain the performance of the AquaSed.	The performance of the AquaSed was improved as observed during the ET weekly site inspection on 04 December 2013.
Air Quality	N/A	N/A	N/A
Noise	N/A	N/A	N/A
Waste / Chemical Management	N/A	N/A	N/A

Parameters	Date	Observations and Recommendations	Follow-up
Landscape & Visual	13 Nov 2013	<u>Reminder:</u> The Contractor was reminded to ensure the provision of tree protection zone for all existing trees to be transplanted or retained.	The tree protection zone has been erected for the trees, as observed during the ET weekly site inspection on 26 November 2013.
Permits / Licenses	N/A	N/A	N/A

8.0 IMPLEMENTATION STATUS OF ENVIRONMENTAL MITIGATION MEASURES

- 8.1.1 The Contractor has implemented the relevant environmental mitigation measures as specified in the EIA Reports, EPs and updated EM&A Manual. The implementation status of environmental mitigation measures during the reporting period is summarized in **Appendix K**. The status of the required submissions under the EP during the reporting period is summarized in **Table 8.1**.

Table 8.1 Status of Required Submission under Environmental Permit

EP Condition	Submission	Submission Date
Condition 2.6	Landscape Plan	4 Nov 2013

9.0 ENVIRONMENTAL NON-CONFORMANCE

9.1 Summary of Monitoring Exceedances

- 9.1.1 Two (2) Action Level exceedances of 24-hour TSP monitoring were recorded on 16 and 22 November 2013 while one (1) Limit Level exceedance was recorded on 28 November 2013 at the monitoring location (SR77) in the reporting month. The investigation reports of the exceedances are under process. It will be reported during next reporting period.
- 9.1.2 All 1-hour TSP results were below the Action and Limit Levels in the reporting month.
- 9.1.3 No noise complaint was received in the reporting month; hence, no Action Level exceedance was recorded. No Limit Level exceedance for noise was record in the reporting month.
- 9.1.4 Two (2) exceedances of water quality limit (i.e. Action Level) of DO were recorded on 9 and 18 November 2013 in the reporting month. The investigation of exceedances had been conducted which concluded that the exceedances were not due to Project works. The investigation reports for the incidents are attached in **Appendix L**.

9.2 Summary of Environmental Non-Compliance

- 9.2.1 No environmental non-compliance was recorded in the reporting month.

9.3 Summary of Environmental Complaints

- 9.3.1 A complaint regarding water quality of Ma Wat River was received on 26 November 2013. The ET had conducted investigations for the complaint which was considered as an invalid complaint under this Project. The cumulative statistics are provided in **Appendix M**.

9.4 Summary of Environmental Summon and Successful Prosecutions

- 9.4.1 No environmental related prosecution or notification of summons was received in the reporting month. The cumulative statistics are provided in **Appendix M**.

10.0 FUTURE KEY ISSUES

10.1 Construction Programme for the Next Month

10.1.1 The major construction works in the coming reporting month are anticipated to include:

- Hoarding and fencing erection, initial survey and base slab demolition;
- Site clearance and tree felling;
- Excavation works and base slab demolition;
- Pre-drilling works; and
- Box culvert extension works – Flow diversion of existing stream, base and wall slab construction.

10.2 Key Issues for the Coming Month

10.2.1 Key issues to be considered in the coming month are anticipated to include:

- Site runoff should be properly collected and treated prior to discharge;
- Properly maintain all drainage facilities and wheel washing facilities on site;
- Chemical, chemical waste and waste management;
- Tree protective measures for all retained trees should be well maintained; and
- Expose slopes and dusty stockpile should be covered up properly if no temporary work will be conducted.

10.3 Monitoring Schedule for the Next Month

10.3.1 The tentative schedule for environmental monitoring in the coming reporting month is provided in **Appendix C**.

11.0 CONCLUSIONS AND RECOMMENDATIONS

11.1 Conclusions

- 11.1.1 The construction phase EM&A programme of the Project commenced on 5 November 2013.
- 11.1.2 The 1-hr TSP, 24-hr TSP, noise and water monitoring were carried out in the reporting period.
- 11.1.3 Two (2) Action Level exceedances of 24-hour TSP monitoring were recorded on 16 and 22 November 2013 while one (1) Limit Level exceedance was recorded on 28 November 2013 at the monitoring location (SR77) in the reporting month. The investigation reports of the exceedances are under process. It will be reported during next reporting period.
- 11.1.4 No Action and Limit Level exceedance for construction noise and 1-hour TSP monitoring was recorded in the reporting period.
- 11.1.5 Two (2) exceedances of water quality limit (i.e. Action Level) of DO were recorded on 9 and 18 November 2013 in the reporting month. The investigation of exceedances had been conducted which concluded that the exceedances were not due to project works.
- 11.1.6 Environmental site inspection was carried out for 4 times in November 2013. Recommendations on remedial actions were given to the Contractors for the deficiencies identified during the site audit.
- 11.1.7 A complaint regarding the water quality of Ma Wat River was received on 26 November 2013. The ET had conducted investigations for the complaint which was considered as an invalid complaint under this Project.

11.2 Recommendations

- 11.2.1 According to the environmental site inspections performed in the reporting month, the following recommendations were provided:


Water Quality


- Implement proper mitigation measures (e.g. sand bags) to avoid earth, mud and debris leaving the works area via storm water drainage;
- Ensure the provision of drip tray to avoid spillage;
- Enhance the efficiency of the washed water collection channel for the wheel washing area;
- Ensure water treatment implemented before discharge; and
- Ensure drainage facilities erosion and sediment control structures are well maintained and inspected regularly.


Landscape & Visual



- Ensure the provision of tree protection zone for all existing trees to be transplanted or retained.

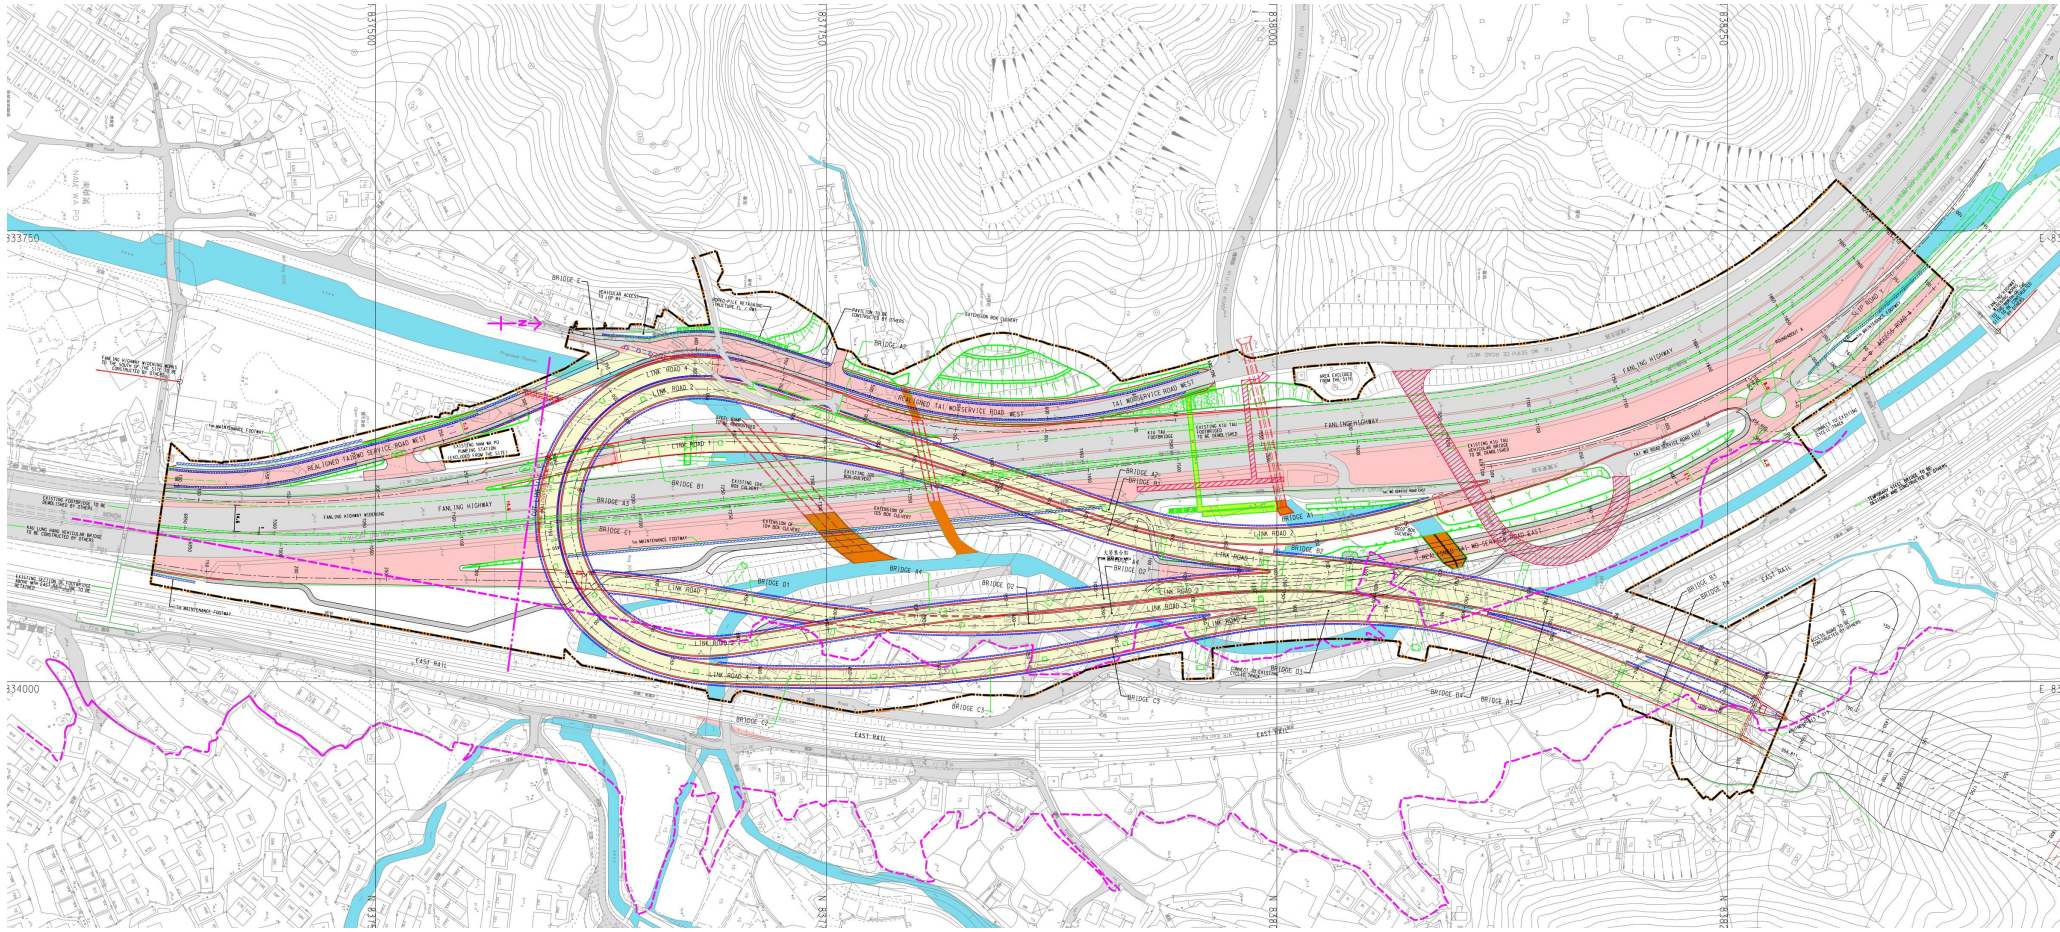Figure

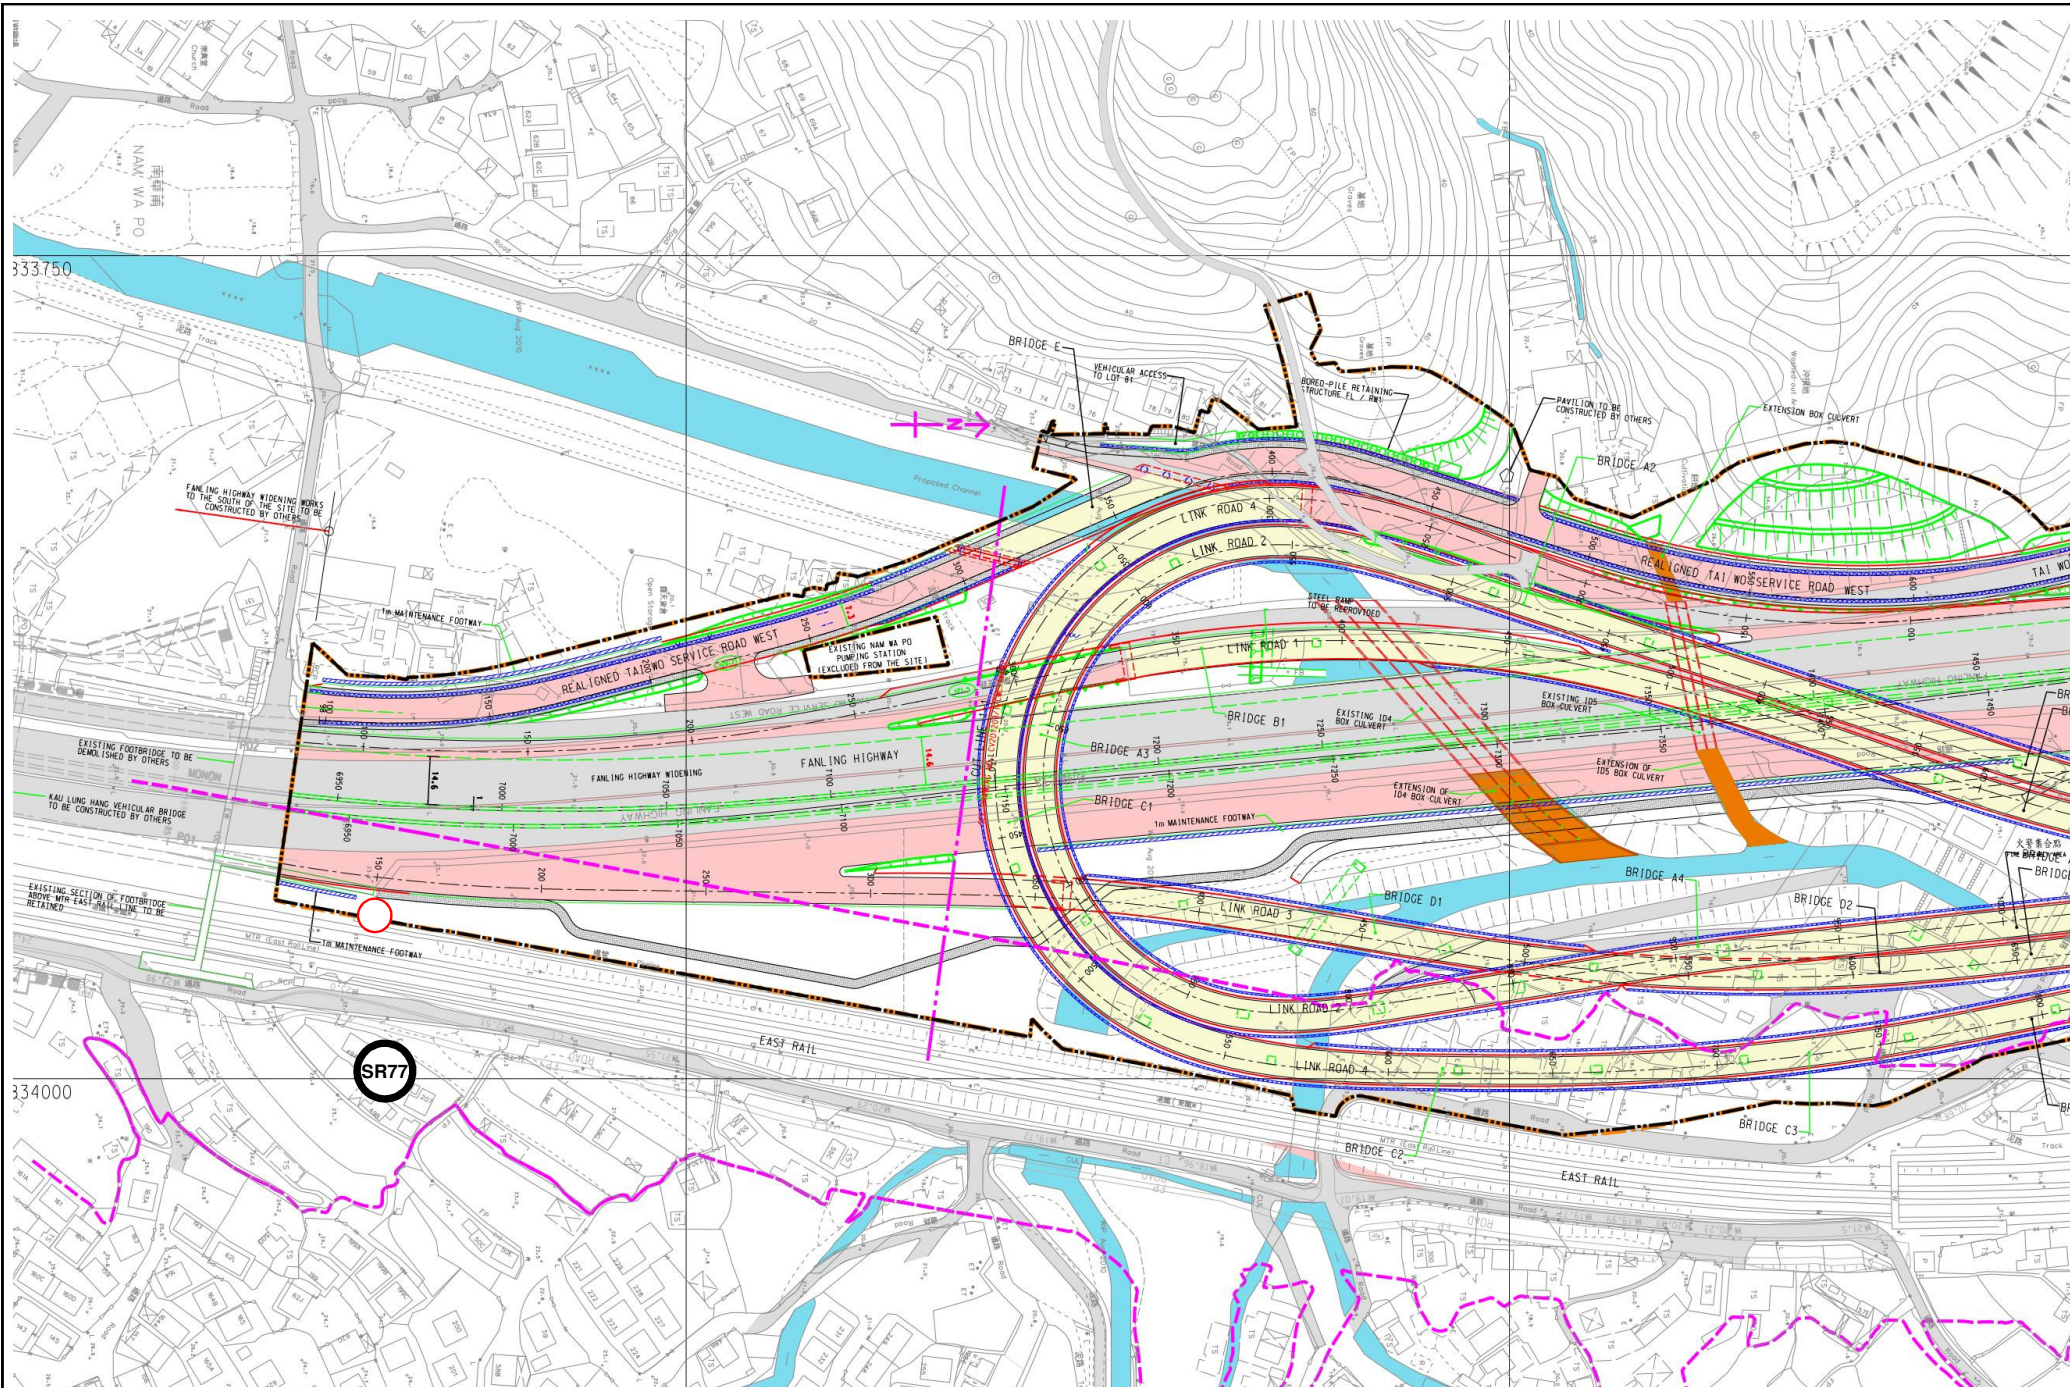


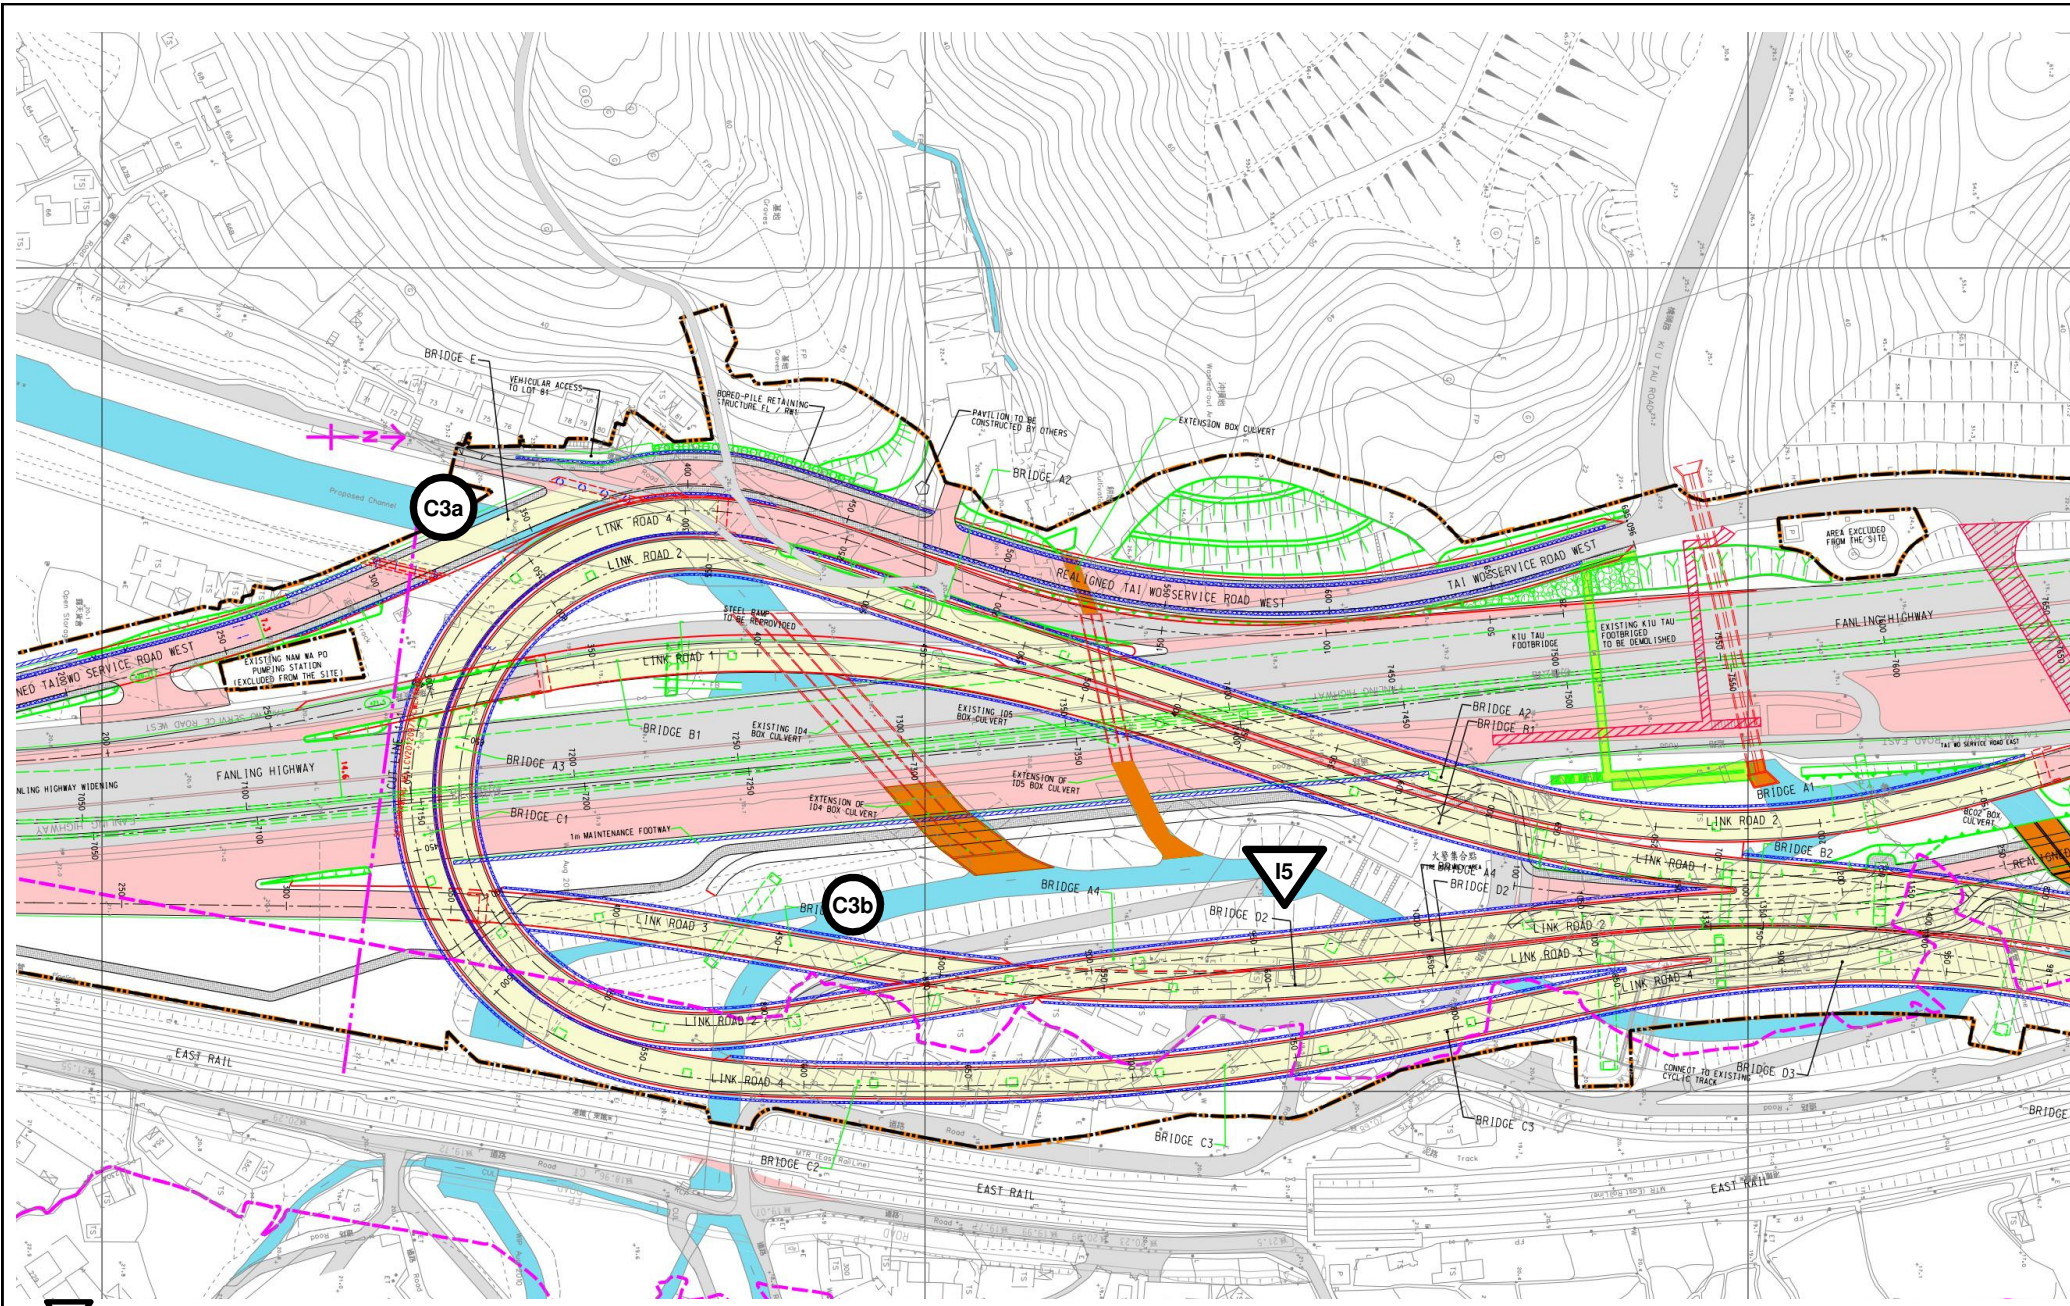



 Impact Water Monitoring Location
 Control Water Monitoring Location

Appendix A Construction Programme

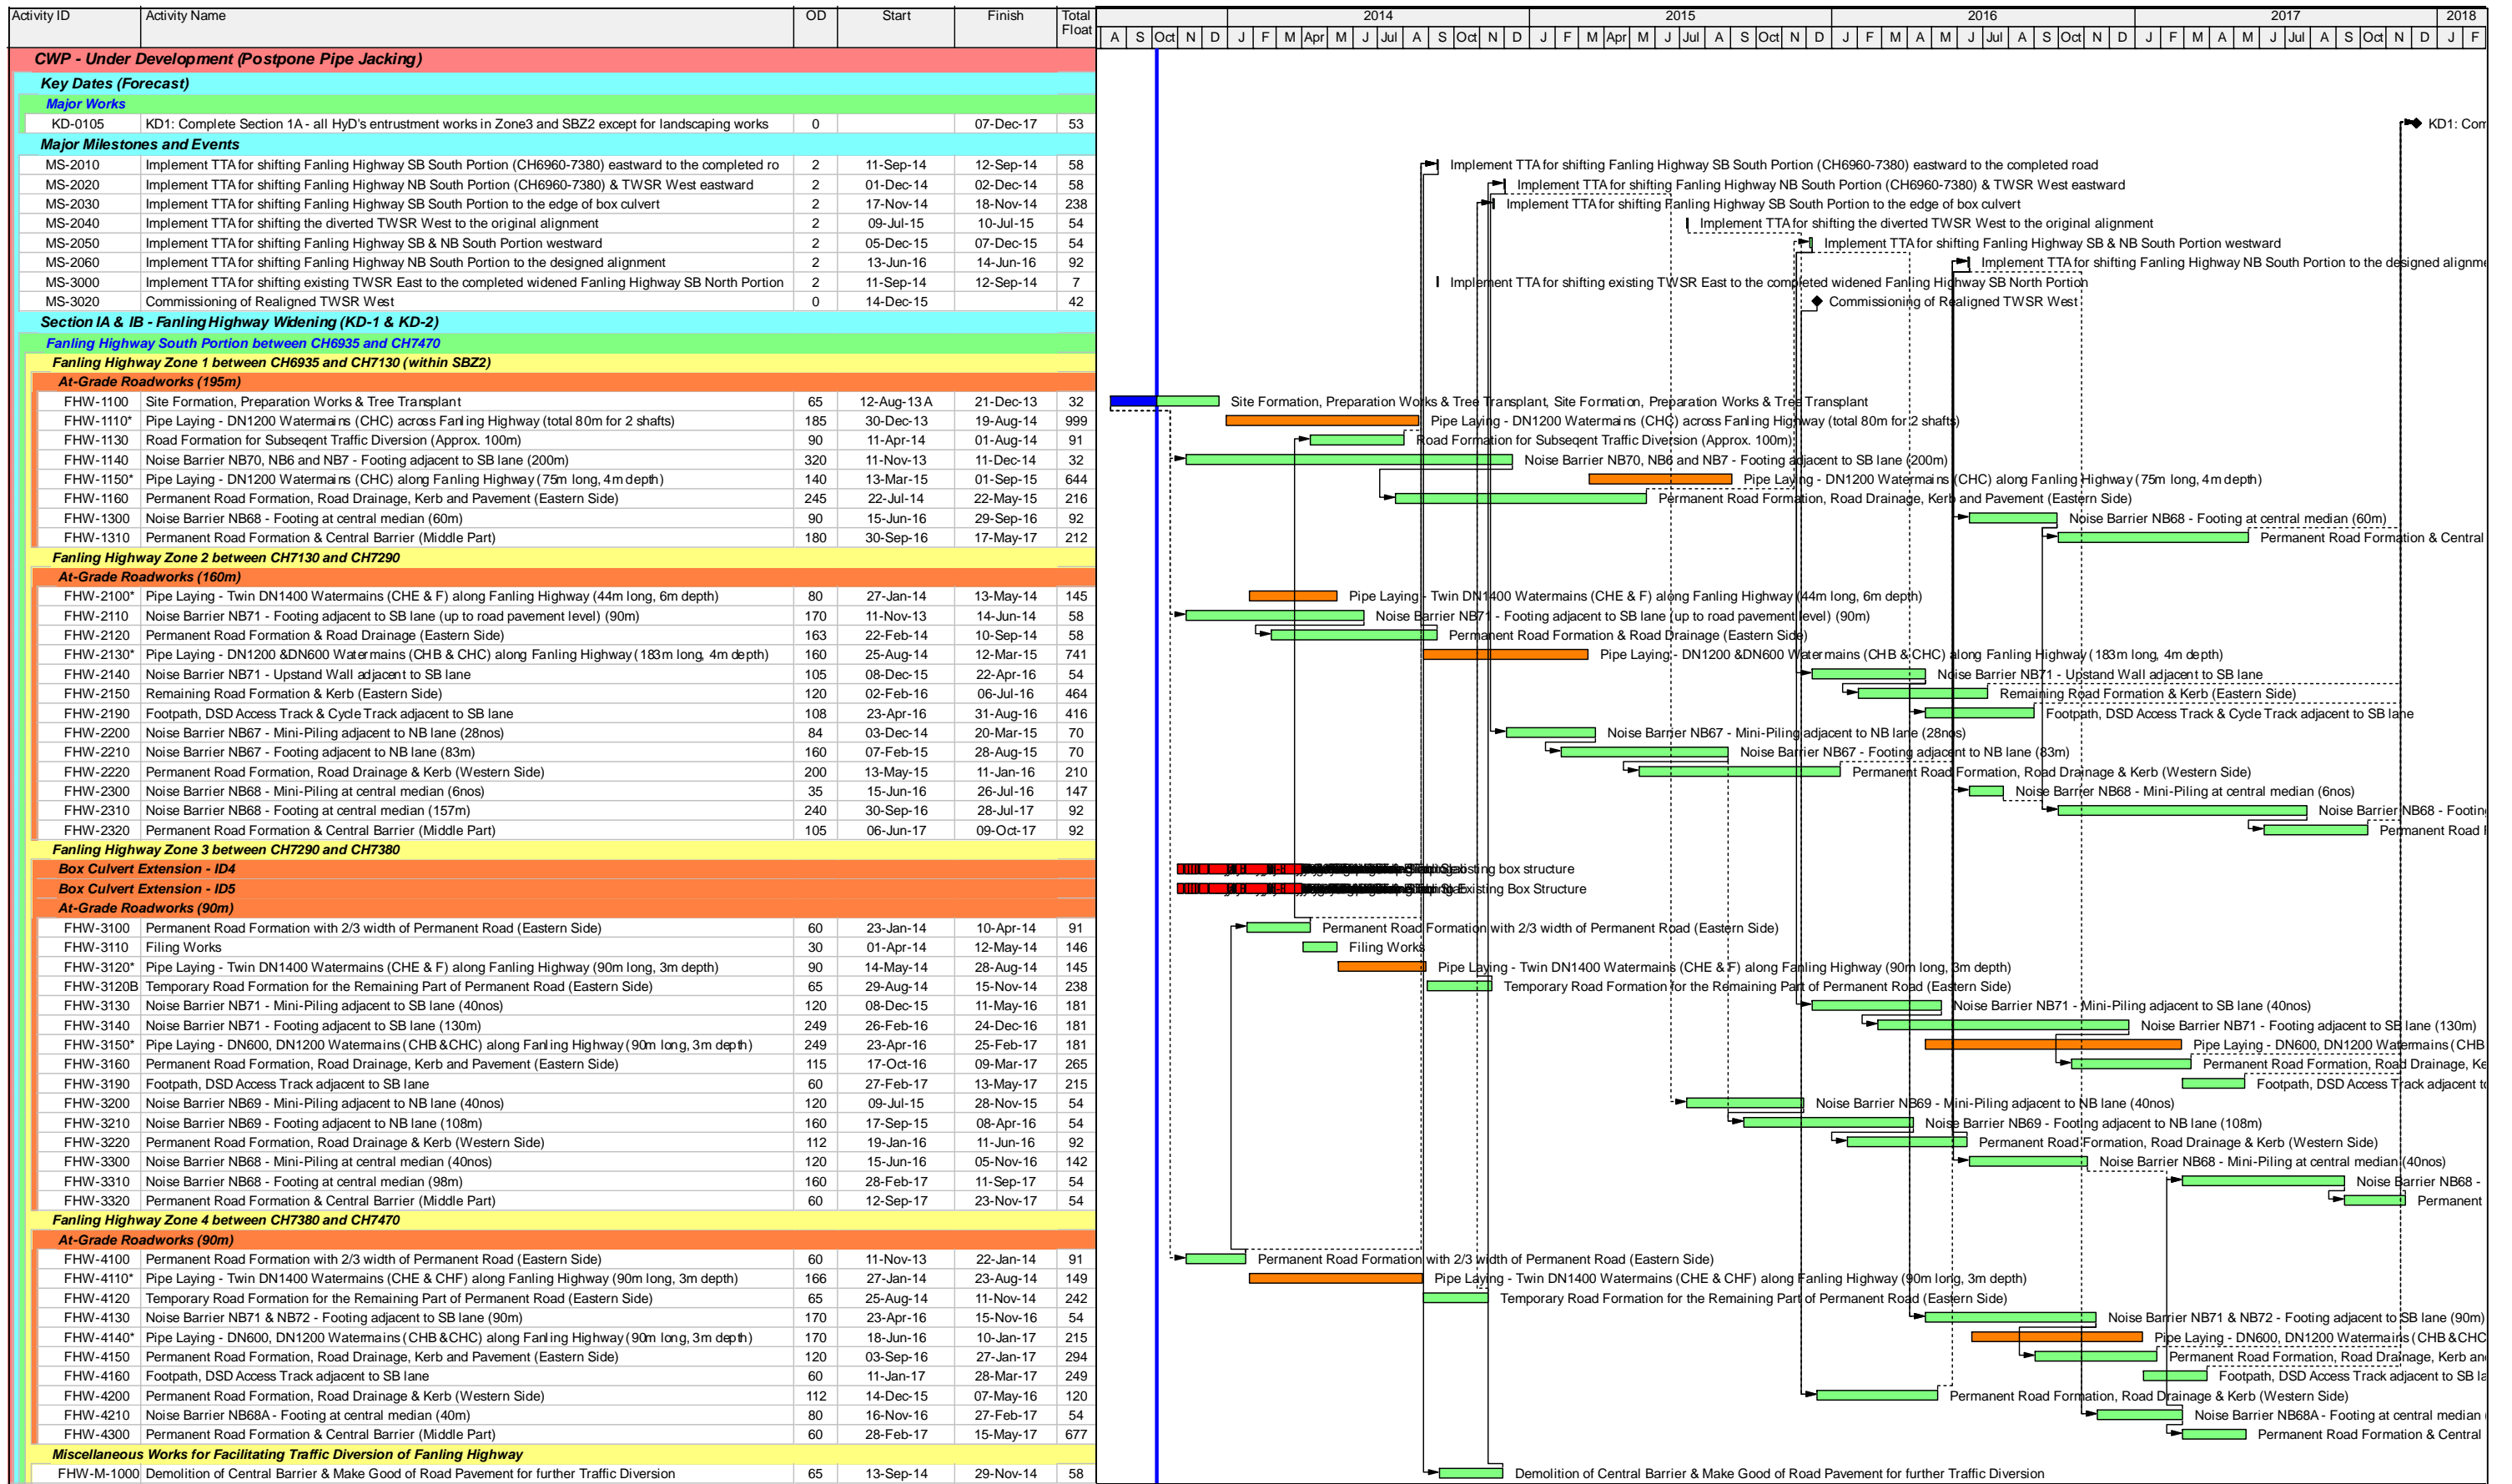

Activity ID	Activity Name	OD	Start	Finish	Total Float
CWP - Under Development (Postpone Pipe Jacking)					
Key Dates (Forecast)					
Major Works					
KD-0105	KD1: Complete Section 1A - all HyD's entrustment works in Zone3 and SBZ2 except for landscaping works	0		07-Dec-17	53
Major Milestones and Events					
MS-2010	Implement TTA for shifting Fanling Highway SB South Portion (CH6960-7380) eastward to the completed ro	2	11-Sep-14	12-Sep-14	58
MS-2020	Implement TTA for shifting Fanling Highway NB South Portion (CH6960-7380) & TWSR West eastward	2	01-Dec-14	02-Dec-14	58
MS-2030	Implement TTA for shifting Fanling Highway SB South Portion to the edge of box culvert	2	17-Nov-14	18-Nov-14	238
MS-2040	Implement TTA for shifting the diverted TWSR West to the original alignment	2	09-Jul-15	10-Jul-15	54
MS-2050	Implement TTA for shifting Fanling Highway SB & NB South Portion westward	2	05-Dec-15	07-Dec-15	54
MS-2060	Implement TTA for shifting Fanling Highway NB South Portion to the designed alignment	2	13-Jun-16	14-Jun-16	92
MS-3000	Implement TTA for shifting existing TWSR East to the completed widened Fanling Highway SB North Portion	2	11-Sep-14	12-Sep-14	7
MS-3020	Commissioning of Realigned TWSR West	0	14-Dec-15		42
Section IA & IB - Fanling Highway Widening (KD-1 & KD-2)					
Fanling Highway South Portion between CH6935 and CH7470					
Fanling Highway Zone 1 between CH6935 and CH7130 (within SBZ2)					
At-Grade Roadworks (195m)					
FHW-1100	Site Formation, Preparation Works & Tree Transplant	65	12-Aug-13	21-Dec-13	32
FHW-1110*	Pipe Laying - DN1200 Watermains (CHC) across Fanling Highway (total 80m for 2 shafts)	185	30-Dec-13	19-Aug-14	999
FHW-1130	Road Formation for Subsequent Traffic Diversion (Approx. 100m)	90	11-Apr-14	01-Aug-14	91
FHW-1140	Noise Barrier NB70, NB6 and NB7 - Footing adjacent to SB lane (200m)	320	11-Nov-13	11-Dec-14	32
FHW-1150*	Pipe Laying - DN1200 Watermains (CHC) along Fanling Highway (75m long, 4m depth)	140	13-Mar-15	01-Sep-15	644
FHW-1160	Permanent Road Formation, Road Drainage, Kerb and Pavement (Eastern Side)	245	22-Jul-14	22-May-15	216
FHW-1300	Noise Barrier NB68 - Footing at central median (60m)	90	15-Jun-16	29-Sep-16	92
FHW-1310	Permanent Road Formation & Central Barrier (Middle Part)	180	30-Sep-16	17-May-17	212
Fanling Highway Zone 2 between CH7130 and CH7290					
At-Grade Roadworks (160m)					
FHW-2100*	Pipe Laying - Twin DN1400 Watermains (CHE & F) along Fanling Highway (44m long, 6m depth)	80	27-Jan-14	13-May-14	145
FHW-2110	Noise Barrier NB71 - Footing adjacent to SB lane (up to road pavement level) (90m)	170	11-Nov-13	14-Jun-14	58
FHW-2120	Permanent Road Formation & Road Drainage (Eastern Side)	163	22-Feb-14	10-Sep-14	58
FHW-2130*	Pipe Laying - DN1200 & DN600 Watermains (CHB & CHC) along Fanling Highway (183m long, 4m depth)	160	25-Aug-14	12-Mar-15	741
FHW-2140	Noise Barrier NB71 - Upstand Wall adjacent to SB lane	105	08-Dec-15	22-Apr-16	54
FHW-2150	Remaining Road Formation & Kerb (Eastern Side)	120	02-Feb-16	06-Jul-16	464
FHW-2190	Footpath, DSD Access Track & Cycle Track adjacent to SB lane	108	23-Apr-16	31-Aug-16	416
FHW-2200	Noise Barrier NB67 - Mini-Piling adjacent to NB lane (28nos)	84	03-Dec-14	20-Mar-15	70
FHW-2210	Noise Barrier NB67 - Footing adjacent to NB lane (83m)	160	07-Feb-15	28-Aug-15	70
FHW-2220	Permanent Road Formation, Road Drainage & Kerb (Western Side)	200	13-May-15	11-Jan-16	210
FHW-2300	Noise Barrier NB68 - Mini-Piling at central median (6nos)	35	15-Jun-16	26-Jul-16	147
FHW-2310	Noise Barrier NB68 - Footing at central median (157m)	240	30-Sep-16	28-Jul-17	92
FHW-2320	Permanent Road Formation & Central Barrier (Middle Part)	105	06-Jun-17	09-Oct-17	92
Fanling Highway Zone 3 between CH7290 and CH7380					
Box Culvert Extension - ID4					
Box Culvert Extension - ID5					
At-Grade Roadworks (90m)					
FHW-3100	Permanent Road Formation with 2/3 width of Permanent Road (Eastern Side)	60	23-Jan-14	10-Apr-14	91
FHW-3110	Filing Works	30	01-Apr-14	12-May-14	146
FHW-3120*	Pipe Laying - Twin DN1400 Watermains (CHE & F) along Fanling Highway (90m long, 3m depth)	90	14-May-14	28-Aug-14	145
FHW-3120B	Temporary Road Formation for the Remaining Part of Permanent Road (Eastern Side)	65	29-Aug-14	15-Nov-14	238
FHW-3130	Noise Barrier NB71 - Mini-Piling adjacent to SB lane (40nos)	120	08-Dec-15	11-May-16	181
FHW-3140	Noise Barrier NB71 - Footing adjacent to SB lane (130m)	249	26-Feb-16	24-Dec-16	181
FHW-3150*	Pipe Laying - DN600, DN1200 Watermains (CHB & CHC) along Fanling Highway (90m long, 3m depth)	249	23-Apr-16	25-Feb-17	181
FHW-3160	Permanent Road Formation, Road Drainage, Kerb and Pavement (Eastern Side)	115	17-Oct-16	09-Mar-17	265
FHW-3190	Footpath, DSD Access Track adjacent to SB lane	60	27-Feb-17	13-May-17	215
FHW-3200	Noise Barrier NB69 - Mini-Piling adjacent to NB lane (40nos)	120	09-Jul-15	28-Nov-15	54
FHW-3210	Noise Barrier NB69 - Footing adjacent to NB lane (108m)	160	17-Sep-15	08-Apr-16	54
FHW-3220	Permanent Road Formation, Road Drainage & Kerb (Western Side)	112	19-Jan-16	11-Jun-16	92
FHW-3300	Noise Barrier NB68 - Mini-Piling at central median (40nos)	120	15-Jun-16	05-Nov-16	142
FHW-3310	Noise Barrier NB68 - Footing at central median (98m)	160	28-Feb-17	11-Sep-17	54
FHW-3320	Permanent Road Formation & Central Barrier (Middle Part)	60	12-Sep-17	23-Nov-17	54
Fanling Highway Zone 4 between CH7380 and CH7470					
At-Grade Roadworks (90m)					
FHW-4100	Permanent Road Formation with 2/3 width of Permanent Road (Eastern Side)	60	11-Nov-13	22-Jan-14	91
FHW-4110*	Pipe Laying - Twin DN1400 Watermains (CHE & CHF) along Fanling Highway (90m long, 3m depth)	166	27-Jan-14	23-Aug-14	149
FHW-4120	Temporary Road Formation for the Remaining Part of Permanent Road (Eastern Side)	65	25-Aug-14	11-Nov-14	242
FHW-4130	Noise Barrier NB71 & NB72 - Footing adjacent to SB lane (90m)	170	23-Apr-16	15-Nov-16	54
FHW-4140*	Pipe Laying - DN600, DN1200 Watermains (CHB & CHC) along Fanling Highway (90m long, 3m depth)	170	18-Jun-16	10-Jan-17	215
FHW-4150	Permanent Road Formation, Road Drainage, Kerb and Pavement (Eastern Side)	120	03-Sep-16	27-Jan-17	294
FHW-4160	Footpath, DSD Access Track adjacent to SB lane	60	11-Jan-17	28-Mar-17	249
FHW-4200	Permanent Road Formation, Road Drainage & Kerb (Western Side)	112	14-Dec-15	07-May-16	120
FHW-4210	Noise Barrier NB68A - Footing at central median (40m)	80	16-Nov-16	27-Feb-17	54
FHW-4300	Permanent Road Formation & Central Barrier (Middle Part)	60	28-Feb-17	15-May-17	677
Miscellaneous Works for Facilitating Traffic Diversion of Fanling Highway					
FHW-M-1000	Demolition of Central Barrier & Make Good of Road Pavement for further Traffic Diversion	65	13-Sep-14	29-Nov-14	58

俊和建築工程有限公司
CHUN WO CONSTRUCTION & ENGINEERING CO., LTD.

- Actual Work
- Remaining Work
- Summary Bar
- Critical Remaining Work
- ◆ Milestone

CEDD Contract No. CV/2012/09



Liantang / Heung Yuen Wai BCP - Site Formation & Infrastructure Works, Contract 3

Works Sequence for Fanling Highway South Portion

CWP004-1 Page 1 of 1 11-Oct-13

Date	Revision	Checked	Approved
11-Oct-13		SL	

Activity ID	Activity Name	OD	Start	Finish	Total Float	2014												2015												2016												2017	
						Oct	Nov	Dec	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Jan	Feb									
CWP - Under Development (Postpone Pipe Jacking)																																											
Key Dates (Forecast)																																											
Major Works																																											
KD-0905	KD13: Achieve Stage N4A - connection of Access Road A and Slip Road Y at Entrustment Boundary CD	0		25-Sep-15	36																																						
KD-1005	KD14: Achieve Stage N4B - commissioning of Roundabout A by connecting to Slip Rd Y, Access Rd A & th	0		24-May-16	8																																						
KD-0205	KD2: Complete Section 1B - all HyD's entrustment works in NBZ1 except for landscaping works	0		09-Jan-18	234																																						
Major Milestones and Events																																											
MS-3000	Implement TTA for shifting existing TWSR East to the completed widened Fanling Highway SB North Porti	2	11-Sep-14	12-Sep-14	7																																						
Stage N4A & N4B - Realignment of Tai Wo Service Road East (KD-13 & KD-14)																																											
TWSRE Zone 1 between CH100 and CH270																																											
Box Culvert Extension - BC02																																											
TWSRE-1000	Flow Diversion of Existing Stream	4	27-Jan-14	30-Jan-14	95																																						
TWSRE-1010	Excavation, Sub-base and Blinding	5	07-Feb-14	12-Feb-14	95																																						
TWSRE-1020	Bay 1 - Base Slab	14	10-Feb-14	25-Feb-14	95																																						
TWSRE-1030	Bay 2 - Base Slab	14	18-Feb-14	05-Mar-14	95																																						
TWSRE-1040	Bay 1 - Wall and Top Slab	22	26-Feb-14	22-Mar-14	102																																						
TWSRE-1050	Bay 2 - Wall and Top Slab	22	06-Mar-14	31-Mar-14	95																																						
At-Grade Roadworks																																											
TWSRE-1100	Installation of Mini-Pile for PC01 & PC02 (22nos)	66	27-Jan-15	24-Apr-15	24																																						
TWSRE-1110	Noise Barrier NB3 - PC01 & PC02 Construction	55	25-Apr-15	02-Jul-15	24																																						
TWSRE-1130	Retaining Wall Construction for FL/RW5	55	03-Jul-15	04-Sep-15	24																																						
TWSRE-1120	Noise Barrier NB3 - Footing adjacent to Realigned TWSR East (96m)	166	23-Jul-15	15-Feb-16	7																																						
TWSRE-1160	Road Formation, Road Drainage, Kerb, Planter and Pavement (Incl. FL/F8A, FL/F9)	190	25-Sep-15	24-May-16	7																																						
TWSRE Zone 2 between CH270 and CH380																																											
At-Grade Roadworks																																											
TWSRE-2010	Noise Barrier NB3 - Footing adjacent to Realigned TWSR East (96m)	166	22-Dec-14	22-Jul-15	7																																						
TWSRE-2020*	Pipe laying - DN600, DN1400 & DN1200 Watermains (CHB, CHK & CHC) along Realigned TWSR East	172	20-Mar-15	17-Oct-15	89																																						
TWSRE-2020	Retaining Wall Construction for FL/RW6	55	05-Sep-15	11-Nov-15	69																																						
TWSRE-2030	Road Formation, Road Drainage, Kerb, Planter and Pavement	90	12-Nov-15	05-Mar-16	69																																						
TWSRE-2050	Erection of Scaffolding for Demolition Works	60	16-Jun-16	25-Aug-16	3																																						
TWSRE-2040	Completion of New Vehicular Bridge by Other Contractor	0		25-Aug-16	3																																						
TWSRE-2060	Demolition of Existing Vehicular Bridge	40	26-Aug-16	14-Oct-16	3																																						
TWSRE-2070	Commissioning of Realigned TWSR East	0	15-Oct-16		3																																						
TWSRE Zone 3 between CH380 and CH456																																											
At-Grade Roadworks																																											
TWSRE-3010	Noise Barrier NB3 - Footing adjacent to Realigned TWSR East (62m)	83	13-Sep-14	20-Dec-14	7																																						
TWSRE-3020*	Pipe Laying - DN600 & DN1200 Watermains (CHB & CHC) along Realigned TWSR East	53	19-Jan-15	27-Mar-15	75																																						
TWSRE-3030	Road Formation, Road Drainage, Kerb, Planter and Pavement (Incl. FL/F10)	90	28-Mar-15	20-Jul-15	254																																						
Roundabout A, Slip Road and Access Road																																											
TWSRE-4000	Site Formation, Preparation Works & Tree Transplant	65	23-Dec-13	18-Mar-14	172																																						
TWSRE-4050*	Pipe laying - DN600, DN1200 & DN2300 Watermains (CHB, CHC & CHJ) along Access Road A & Round	111	13-Sep-14	26-Jan-15	75																																						
TWSRE-4010	Implementation of TTA - Scheme S1 (Shifting Ext. TWSR East to Fanling Highway S/B)	0	13-Sep-14		28																																						
TWSRE-4020	Slip Road Y (CH260-CH404) - Road Formation, Road Drainage, Kerb, Planter and Pavement	180	13-Sep-14	28-Apr-15	28																																						
TWSRE-4030	Noise Barrier NB74 - Footing adjacent to Realigned TWSR East (72m)	166	12-Dec-14	13-Jul-15	32																																						
TWSRE-4040	Slip Road Y (CH100-CH230) - Road Formation, Road Drainage, Kerb, Planter and Pavement	150	21-Mar-15	21-Sep-15	32																																						
TWSRE-4060	Access Road A - Road Formation, Road Drainage, Kerb, Planter and Pavement	125	29-Apr-15	25-Sep-15	28																																						
TWSRE-4070	Roundabout A - Road Formation, Road Drainage, Kerb, Planter and Pavement	120	22-Sep-15	22-Feb-16	80																																						
Remaining Works for Noise Barrier along realigned TWSR East																																											
TWSRE-NB-110	Installation of Steelwork & Transparent Panel - Noise Barrier NB74 (90m)	35	23-Feb-16	07-Apr-16	537																																						
TWSRE-NB-120	Installation of Steelwork & Transparent Panel - Noise Barrier NB3 (254m)	65	15-Oct-16	31-Dec-16	316																																						

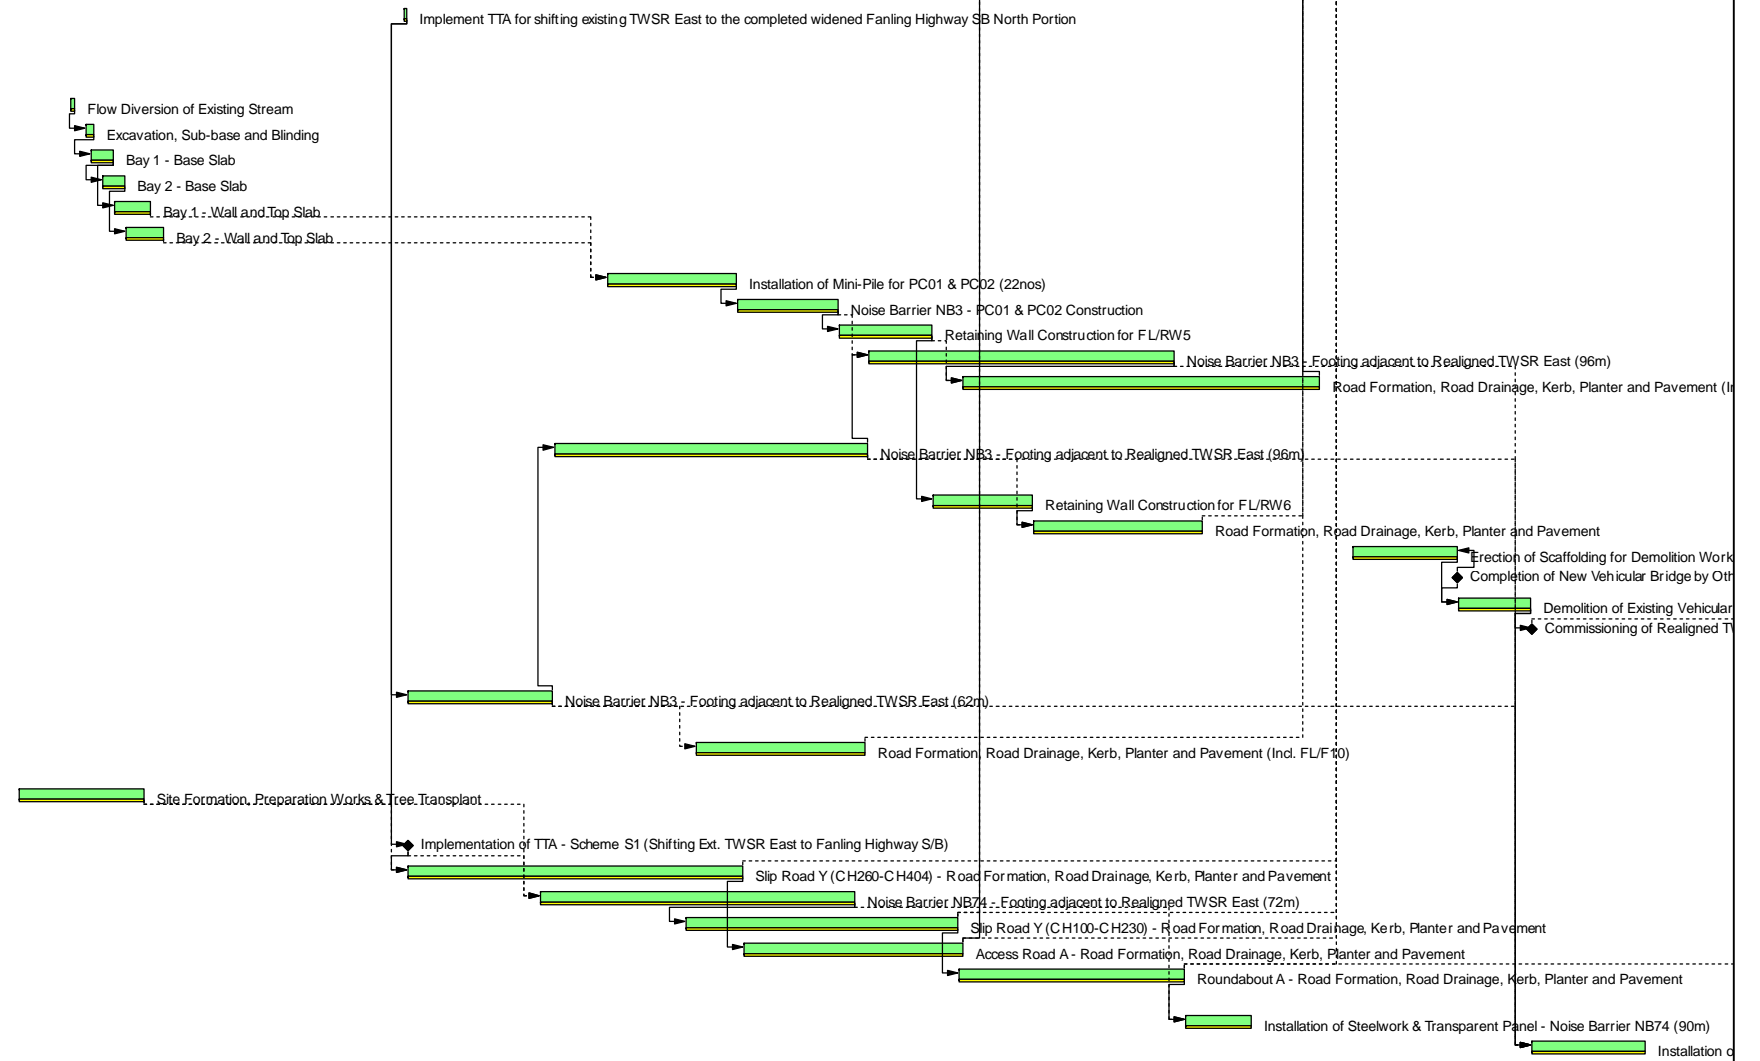


- █ Actual Work
- █ Remaining Work
- █ Critical Remaining Work
- ◆ Milestone
- Project Baseline Bar

CEDD Contract No. CV/2012/09

Liantang / Heung Yuen Wai BCP - Site Formation & Infrastructure Works, Contract 3

Works Sequence for TWSRE

Date	Revision	Checked	Approved
11-Oct-13		SL	

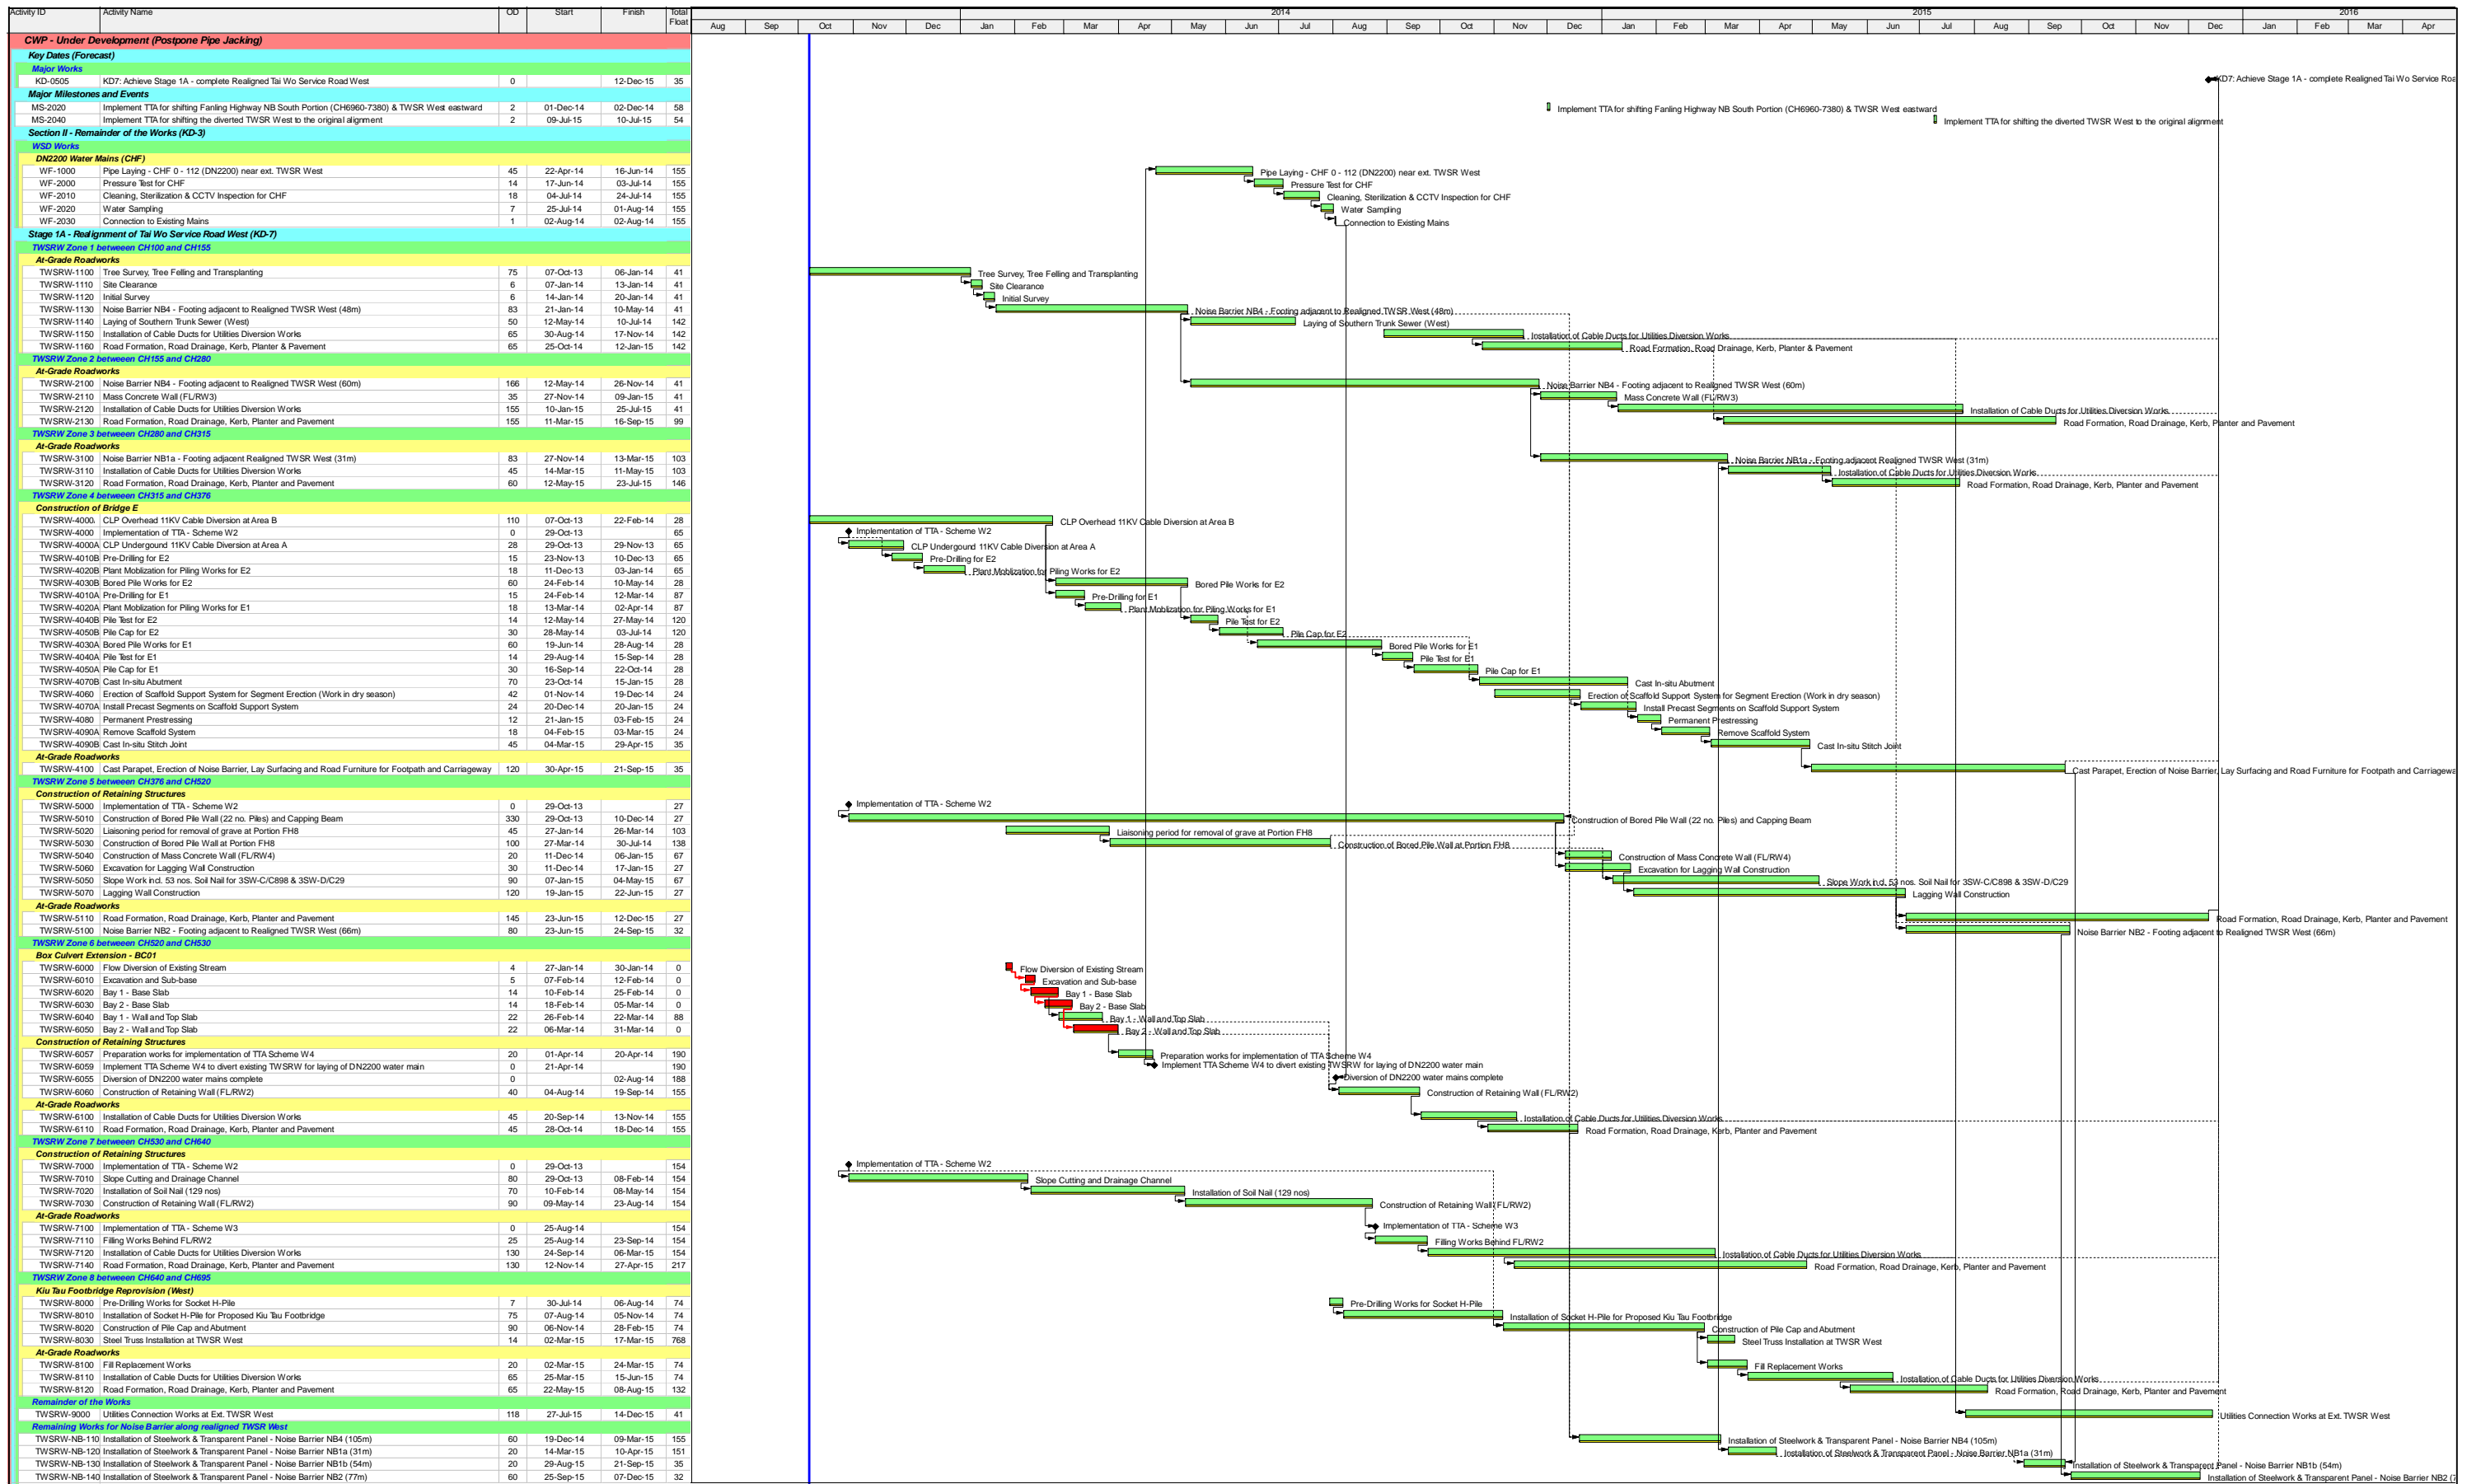


俊和建築工程有限公司
CHUN WO CONSTRUCTION & ENGINEERING CO., LTD.


- █ Actual Work
- █ Remaining Work
- █ Critical Remaining Work
- ◆ Milestone
- ▬ Project Baseline Bar

CEDD Contract No. CV/2012/09
Liantang / Heung Yuen Wai BCP - Site Formation & Infrastructure Works, Contract 3
Works Sequence for TWSRW

Date	Revision	Checked	Approved
11-Sep-13		SL	

Appendix B

Project Organization Structure

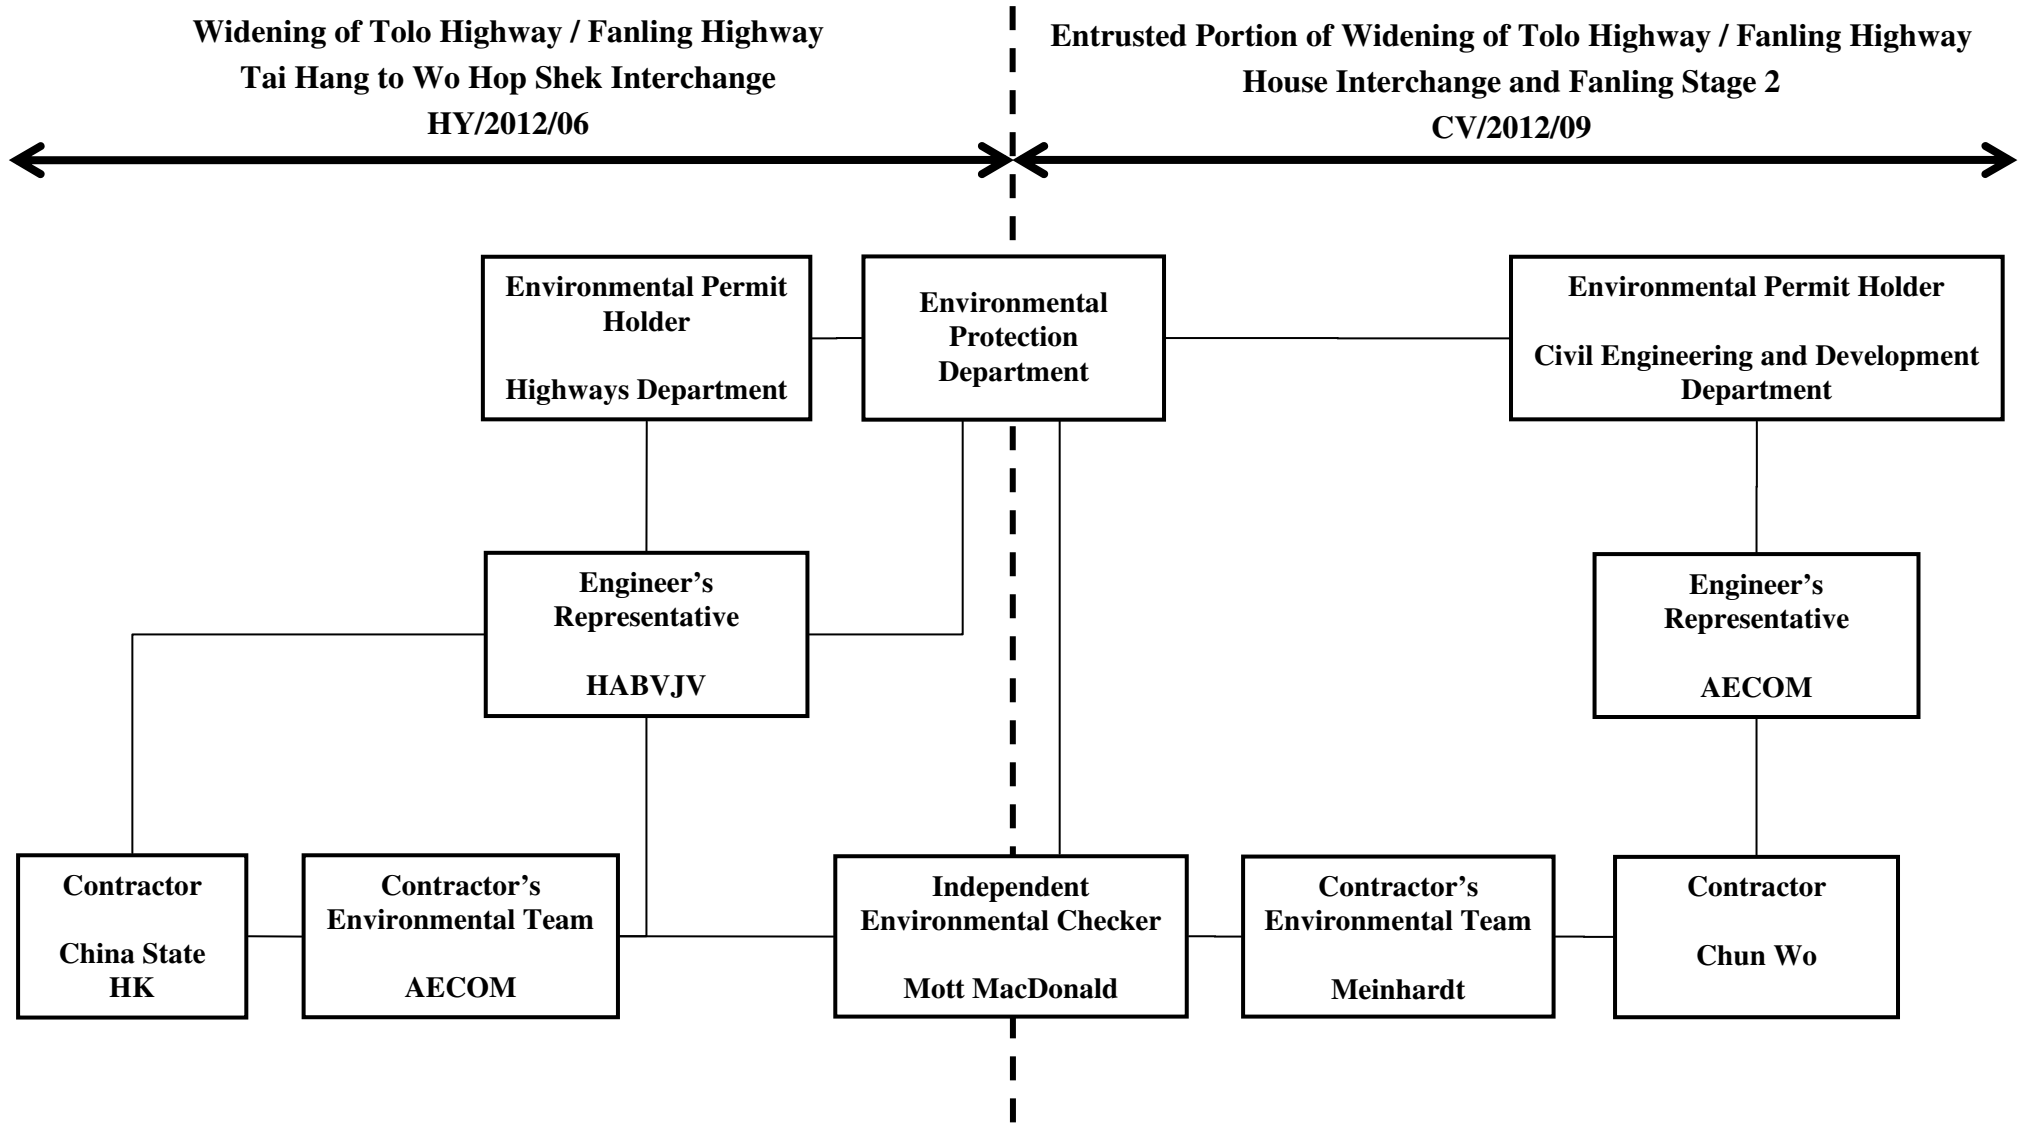

Appendix C Calibration CertificateS of Monitoring Equipment




CERTIFICATE OF CALIBRATION AND TESTING

TSI Incorporated, 500 Cardigan Road, Shoreview, MN 55126 USA
Tel: 1-800-874-2811 1-651-490-2811 Fax: 1-651-490-3824 <http://www.tsi.com>

Environment Condition		Model	AM510
Temperature	68.2 (20.1) °F (°C)	Serial Number	11302029
Relative Humidity	20 %RH		
Barometric Pressure	28.81 (975.6) inHg (hPa)		

<input checked="" type="checkbox"/> As Left	<input checked="" type="checkbox"/> In Tolerance
<input type="checkbox"/> As Found	<input type="checkbox"/> Out of Tolerance

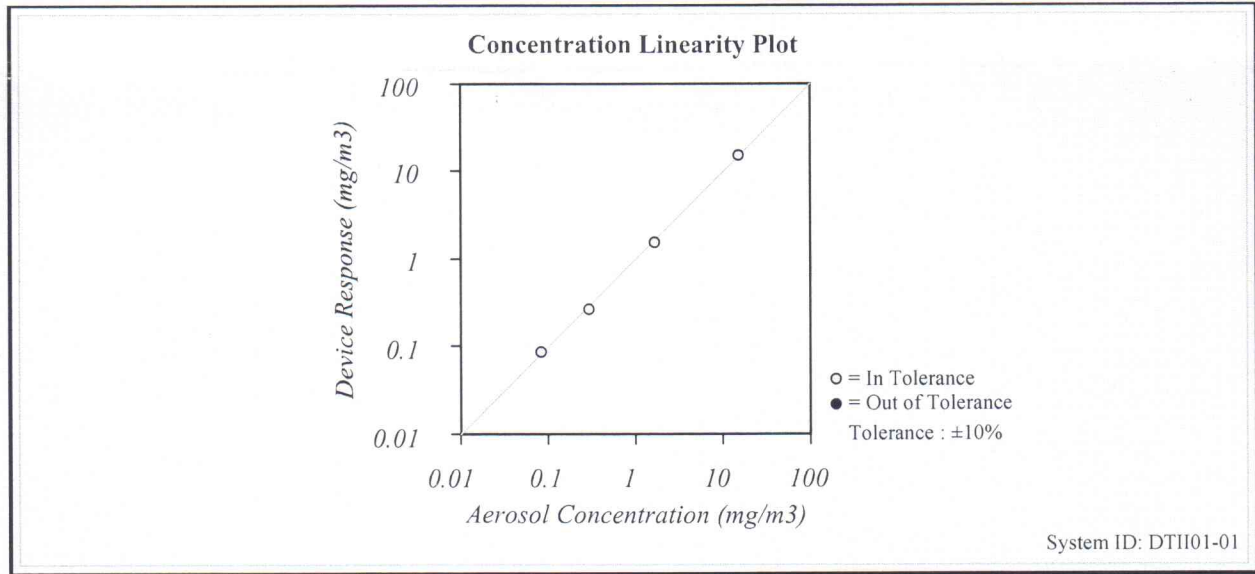

TSI Incorporated does hereby certify that all materials, components, and workmanship used in the manufacture of this equipment are in strict accordance with the applicable specifications agreed upon by TSI and the customer and with all published specifications. All performance and acceptance tests required under this contract were successfully conducted according to required specifications. There is no NIST standard for optical mass measurements. Calibration of this instrument performed by TSI has been done using emery oil and has been nominally adjusted to respirable mass of standard ISO 12103-1, A1 test dust (Arizona dust). Our calibration ratio is greater than 1.2:1

Measurement Variable	System ID	Last Cal.	Cal. Due	Measurement Variable	System ID	Last Cal.	Cal. Due
Photometer	E003433	10-09-12	04-09-13	Flowmeter	E002371	03-06-12	03-06-13
DC Voltage(Keithley)	E002859	01-03-13	01-03-14	Microbalance	M001324	01-04-13	01-04-15
Barometric Pressure	E003733	02-25-12	02-25-13	Temperature	E002873	11-08-12	11-08-13
Humidity	E002873	11-08-12	11-08-13	Pressure	E003440	08-17-12	08-17-13

Kao Vang
Calibrated

Final Function Check

February 12, 2013
Date



TISCH ENVIRONMENTAL, INC.
 145 SOUTH MIAMI AVE.
 VILLAGE OF CLEVELAND, OH 45002
 513.467.9000
 877.263.7610 TOLL FREE
 513.467.9009 FAX
 WWW.TISCH-ENV.COM

AIR POLLUTION MONITORING EQUIPMENT
 ORIFICE TRANSFER STANDARD CERTIFICATION WORKSHEET TE-5025A

Date - Apr 09, 2013 Roots-meter S/N 0438320 Ta (K) - 296
 Operator Tisch Orifice I.D. - 1941 Pa (mm) - 751.84

PLATE OR Run #	VOLUME START (m3)	VOLUME STOP (m3)	DIFF VOLUME (m3)	DIFF TIME (min)	METER DIFF Hg (mm)	ORFICE DIFF H2O (in.)
1	NA	NA	1.00	1.4710	3.3	2.00
2	NA	NA	1.00	1.0370	6.4	4.00
3	NA	NA	1.00	0.9270	7.9	5.00
4	NA	NA	1.00	0.8840	8.8	5.50
5	NA	NA	1.00	0.7300	12.8	8.00

DATA TABULATION

Vstd	(x axis) Qstd	(y axis)	Va	(x axis) Qa	(y axis)
0.9916	0.6741	1.4113	0.9956	0.6768	0.8874
0.9874	0.9521	1.9959	0.9914	0.9560	1.2549
0.9854	1.0630	2.2315	0.9894	1.0673	1.4030
0.9843	1.1134	2.3405	0.9883	1.1180	1.4715
0.9790	1.3410	2.8227	0.9829	1.3465	1.7747
Qstd slope (m) = 2.11662			Qa slope (m) = 1.32539		
intercept (b) = -0.01714			intercept (b) = -0.01078		
coefficient (r) = 0.99999			coefficient (r) = 0.99999		
y axis = $\text{SQRT}[\text{H}_2\text{O}(\text{Pa}/760)(298/\text{Ta})]$			y axis = $\text{SQRT}[\text{H}_2\text{O}(\text{Ta}/\text{Pa})]$		

CALCULATIONS

$V_{std} = \text{Diff. Vol} [(\text{Pa} - \text{Diff. Hg}) / 760] (298 / \text{Ta})$
 $Q_{std} = V_{std} / \text{Time}$

$V_a = \text{Diff Vol} [(\text{Pa} - \text{Diff Hg}) / \text{Pa}]$
 $Q_a = V_a / \text{Time}$

For subsequent flow rate calculations:

$Q_{std} = 1/m \{ [\text{SQRT}(\text{H}_2\text{O}(\text{Pa}/760)(298/\text{Ta}))] - b \}$
 $Q_a = 1/m \{ [\text{SQRT}(\text{H}_2\text{O}(\text{Ta}/\text{Pa}))] - b \}$

TSP Sampler Calibration

SITE

Location: Lian Tang 3 Date: September 4, 2013
 Sampler: TE-5170 MFC (Serial # : 2359) Tech: Sam Wong

CONDITIONS

Barometric Pressure (in Hg):	<u>39.80</u>	Corrected Pressure (mm Hg):	1011
Temperature (deg F):	<u>79</u>	Temperature (deg K):	299
Average Press. (in Hg):	<u>39.80</u>	Corrected Average (mm Hg):	1011
Average Temp. (deg F):	<u>79</u>	Average Temp. (deg K):	299

CALIBRATION ORIFICE

Make: <u>Tisch</u>	Qstd Slope:	<u>2.11662</u>
Model: <u>TE-5025A</u>	Qstd Intercept:	<u>-0.01714</u>
Serial#: <u>1941</u>	Date Certified:	<u>April 9, 2013</u>

CALIBRATIONS

Plate or Test #	H2O (in)	Qstd (m3/min)	I (chart)	IC (corrected)	LINEAR REGRESSION
<u>1</u>	<u>12.40</u>	1.923	<u>58.0</u>	66.77	Slope = 34.2153
<u>2</u>	<u>10.20</u>	1.745	<u>52.0</u>	59.86	Intercept = 0.5950
<u>3</u>	<u>7.90</u>	1.537	<u>46.0</u>	52.95	Corr. coeff.= 0.9995
<u>4</u>	<u>5.20</u>	1.248	<u>38.0</u>	43.74	
<u>5</u>	<u>3.30</u>	0.996	<u>30.0</u>	34.54	# of Observations: <u>5</u>

Calculations

Qstd = $1/m[\text{Sqrt}(H2O(Pa/Pstd)(Tstd/Ta))-b]$
 IC = $I[\text{Sqrt}(Pa/Pstd)(Tstd/Ta)]$

Qstd = standard flow rate
 IC = corrected chart response
 I = actual chart response
 m = calibrator Qstd slope
 b = calibrator Qstd intercept
 Ta = actual temperature during calibration (deg K)
 Pa = actual pressure during calibration (mm Hg)
 Tstd = 298 deg K
 Pstd = 760 mm Hg
 For subsequent calculation of sampler flow:
 $1/m((I) [\text{Sqrt}(298/Tav)(Pav/760)] - b)$


m = sampler slope
 b = sampler intercept
 I = chart response
 Tav = daily average temperature
 Pav = daily average pressure

Calibrated By : **Sam WONG**



Checked By : **Thomas WONG**



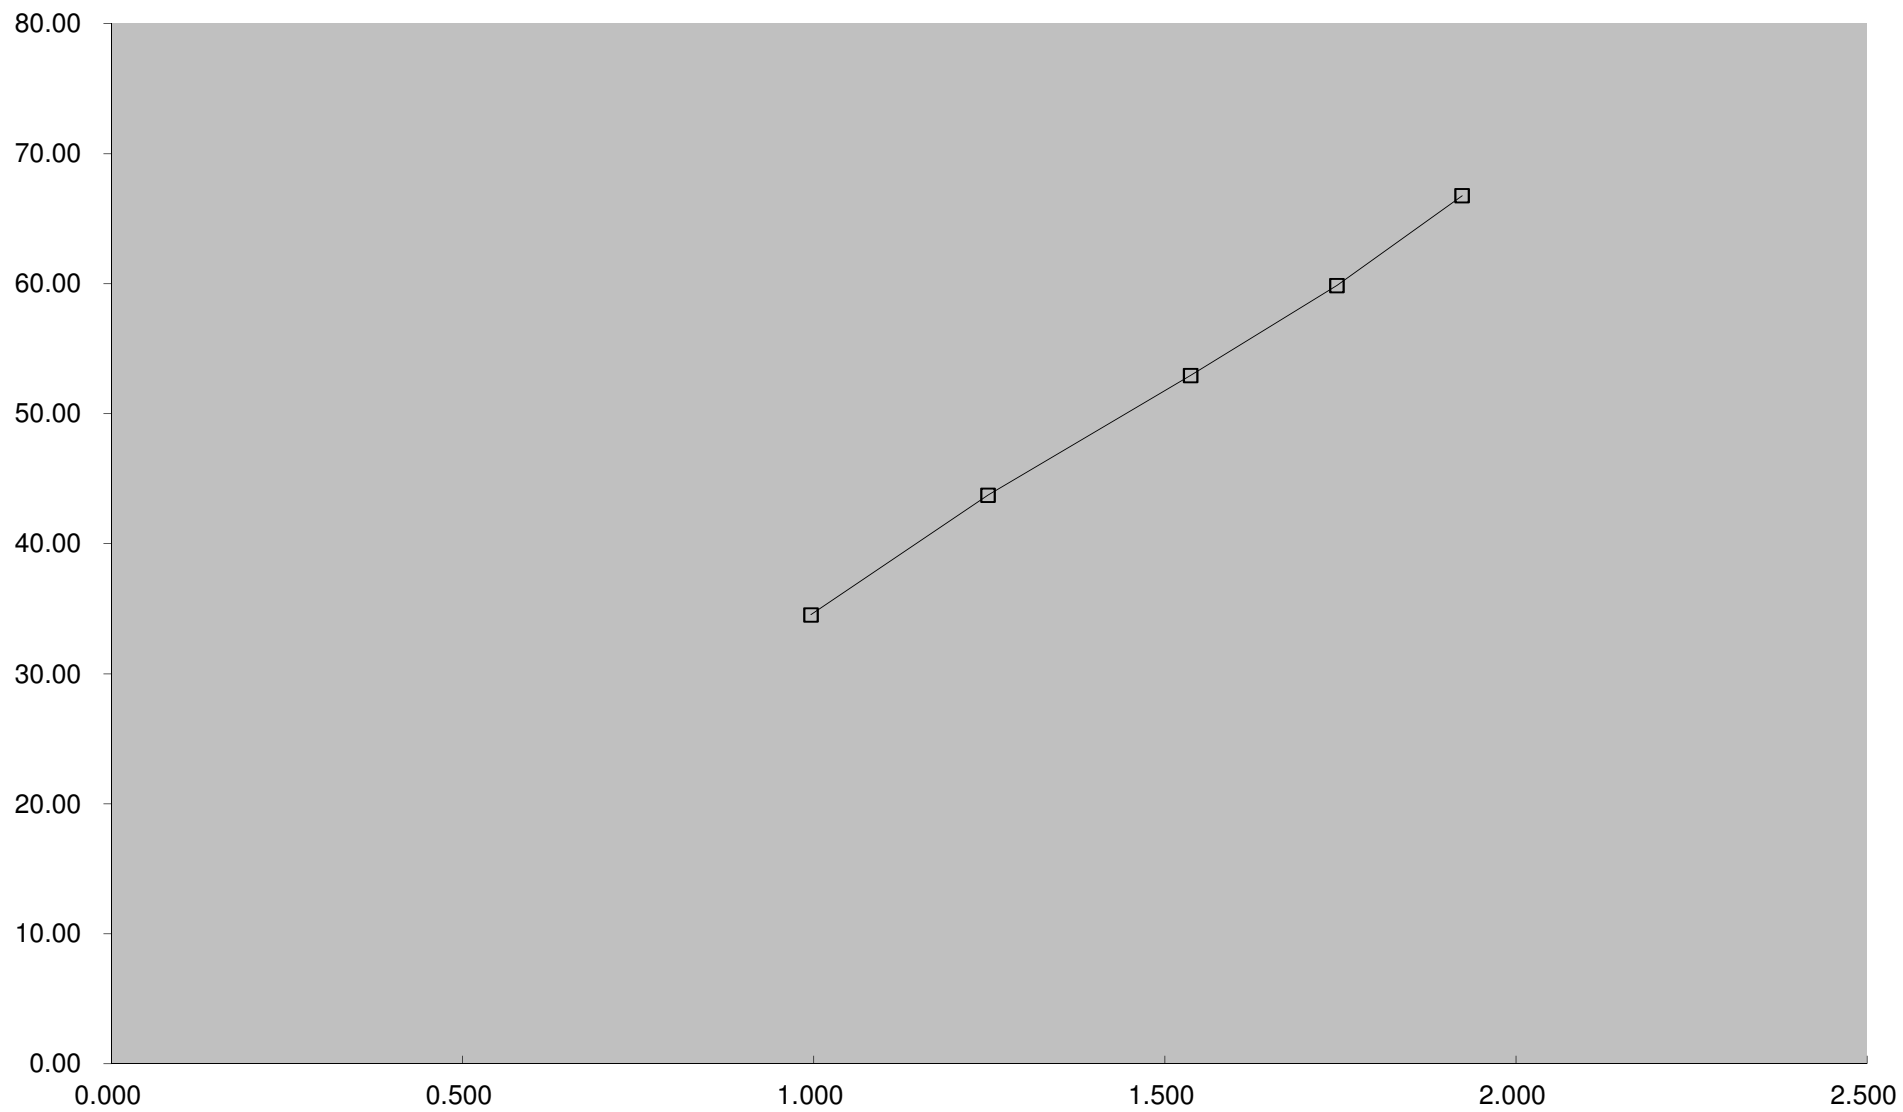



Calibration Certificate

Certificate No. 37521

Page 1 of 2 Pages

Customer : Enovative Environmental Service Limited

Address : Room 3, 12/F., New City Centre, 2 Lei Yue Mun Road, Kwun Tong, Kowloon, H.K.

Order No. : Q32432

Date of receipt : 16-Oct-13

Item Tested

Description : Sound Level Calibrator

Manufacturer : B&K

Model : Type 4231

Serial No. : 2685684

Test Conditions

Date of Test : 31-Oct-13

Supply Voltage : --

Ambient Temperature : (23 ± 3)°C

Relative Humidity : (50 ± 25) %

Test Specifications

Calibration check.

Ref. Document/Procedure : F21, Z02.

Test Results

All results were within the IEC 942 Class 1 specification.

The results are shown in the attached page(s).

Main Test equipment used:


<u>Equipment No.</u>	<u>Description</u>	<u>Cert. No.</u>	<u>Traceable to</u>
S014	Spectrum Analyzer	35730	NIM-PRC & SCL-HKSAR
S205	Ref. Sound Level Calibrator	PHCO40002	SCL-HKSAR
S041	Universal Counter	34621	SCL-HKSAR
S206	Sound Level Meter	36203	SCL-HKSAR
S031	6½ dgt. Multimeter	30128	NIM-PRC

The values given in this Calibration Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environmental changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Hong Kong Calibration Ltd. shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration are traceable to International System of Units (SI).

The test results apply to the above Unit-Under-Test only

Calibrated by : 
Dorothy Cheuk

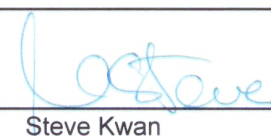Approved by : 
Steve Kwan

This Certificate is issued by:

Hong Kong Calibration Ltd.

Unit 8B, 24/F., Well Fung Industrial Centre, No. 58-76, Ta Chuen Ping Street, Kwai Chung, NT, Hong Kong.

Tel: 2425 8801 Fax: 2425 8646

Date: 31-Oct-13



Calibration Certificate

Certificate No. 37521

Page 2 of 2 Pages

Results :

1. Level Accuracy

UUT Nominal Value (dB)	Measured Value (dB)	IEC 942 Class 1 Spec.
94	94.08	± 0.3 dB
114	114.07	

Uncertainty : ± 0.1 dB

2. Frequency

UUT Nominal Value	Measured Value	IEC 942 Class 1 Spec.
1 kHz	1.002 kHz	± 2 %

Uncertainty : ± 3.6 x 10⁻⁶

- 3. Level Stability** : 0.0 dB
IEC 942 Class 1 Spec. : ± 0.1 dB
Uncertainty : ± 0.01 dB

- 4. Total Harmonic Distortion** : < 0.7 %
IEC 942 Class 1 Spec. : < 3 %
Uncertainty : ± 2.3 % of reading

Remark : 1. UUT : Unit-Under-Test
2. The uncertainty claimed is for a confidence probability of not less than 95%.
3. Atmospheric Pressure : 1014 hPa.

----- END -----



Calibration Certificate

Certificate No. **36604**

Page 1 of 4 Pages

Customer : Enovative Environmental Service Limited

Address : Room 3, 12/F., New City Centre, 2 Lei Yue Mun Road, Kwun Tong, Kowloon, H.K.

Order No. : Q32395

Date of receipt : 4-Sep-13

Item Tested

Description : Sound Level Meter (N12-RION-004)

Manufacturer : Rion

Model : NL-52

Serial No. : 00220553

Test Conditions

Date of Test : 10-Sep-13

Supply Voltage : --

Ambient Temperature : (23 ± 3)°C

Relative Humidity : (50 ± 25) %

Test Specifications

Calibration check.

Ref. Document/Procedure: Z01.

Test Results

All results were within the IEC 61672 Type1 specification.

The results are shown in the attached page(s).

Main Test equipment used:

<u>Equipment No.</u>	<u>Description</u>	<u>Cert. No.</u>	<u>Traceable to</u>
S017	Multi-Function Generator	C127181	SCL-HKSAR
S205	Ref. Sound Level Calibrator	PHCO40002	SCL-HKSAR

The values given in this Calibration Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environmental changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Hong Kong Calibration Ltd. shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration are traceable to International System of Units (SI).

The test results apply to the above Unit-Under-Test only

Calibrated by : 
Dorothy Cheuk

Approved by : 
Steve Kwan

Date: 16-Sep-13

This Certificate is issued by:
Hong Kong Calibration Ltd.
Unit 8B, 24/F., Well Fung Industrial Centre, No. 58-76, Ta Chuen Ping Street, Kwai Chung, NT, Hong Kong.
Tel: 2425 8801 Fax: 2425 8646



Calibration Certificate

Certificate No. 36604

Page 2 of 4 Pages

Results :

1. Self-generated noise: 16.4 dBA (Mfr's Spec ≤ 17 dBA)
2. Acoustical signal test

UUT Setting			Applied Value (dB)	UUT Reading (dB)
Level Range (dB)	Weight	Response		
30 – 130	L _A	Fast	94.0	94.0
		Slow		94.0
	L _C	Fast		94.0
	L _Z	Fast		94.0
	L _A	Fast	114.0	114.0
		Slow		114.0
	L _C	Fast		114.0
	L _Z	Fast		114.0

IEC 61672 Type 1 Spec. : ± 1.1 dB

Uncertainty : ± 0.1 dB

3 Electrical signal tests of frequency weightings (A weighting)

Frequency	Attenuation (dB)	IEC 61672 Type 1 Spec.
31.5 Hz	-39.8	- 39.4 dB, ± 2 dB
63 Hz	-26.4	- 26.2 dB, ± 1.5 dB
125 Hz	-16.3	- 16.1 dB, ± 1.5 dB
250 Hz	-8.7	- 8.6 dB, ± 1 dB
500 Hz	-3.3	- 3.2 dB, ± 1.4 dB
1 kHz	0.0 (Ref)	0 dB, ± 1.1 dB
2 kHz	+1.2	+ 1.2 dB, ± 1.6 dB
4 kHz	+0.9	+ 1.0 dB, ± 1.6 dB
8 kHz	-1.1	- 1.1 dB, + 2.1 dB \sim -3.1 dB
16 kHz	-8.0	- 6.6 dB, + 3.5 dB \sim - 17.0 dB

Uncertainty : ± 0.1 dB



Calibration Certificate

Certificate No. 36604

Page 3 of 4 Pages

4. Frequency & Time weightings at 1 kHz

4.1 Frequency Weighting (Fast)

UUT Setting	Applied Value (dB)	UUT Reading (dB)	Difference (dB)	IEC 61672 Type 1 Spec.
A	94.0	94.0 (Ref.)	--	± 0.4 dB
C	94.0	94.0	0.0	
Z	94.0	94.0	0.0	

4.2 Time Weighting (A-weighted)

UUT Setting	Applied Value (dB)	UUT Reading (dB)	Difference (dB)	IEC 61672 Type 1 Spec.
Fast	94.0	94.0 (Ref.)	--	± 0.3 dB
Slow	94.0	94.0	0.0	
Time-averaging	94.0	94.0	0.0	

Uncertainty : ± 0.1 dB

5. Level linearity on the reference level range

UUT Range	Applied Value (dB)	UUT Reading (dB)	Difference (dB)	IEC 61672 Type 1 Spec.
130 dB (Ref Level)	129.0	129.0	0.0	± 1.1 dB
	124.0	124.0	0.0	
	119.0	119.0	0.0	
	114.0	114.0	0.0	
	109.0	109.0	0.0	
	104.0	104.0	0.0	
	99.0	99.0	0.0	
	94.0	94.0 (Ref)	--	
	89.0	89.0	0.0	
	84.0	84.0	0.0	
	79.0	79.0	0.0	
	74.0	74.0	0.0	
	69.0	69.0	0.0	
	64.0	64.0	0.0	
	59.0	59.0	0.0	
	54.0	54.0	0.0	
	49.0	49.0	0.0	
44.0	44.0	0.0		

Uncertainty : ± 0.1 dB



Calibration Certificate

Certificate No. **36604**

Page 4 of 4 Pages

6. Toneburst response (4kHz)

UUT Setting	Tone Burst Duration(ms)	UUT Reading(dB)	Difference (dB)	IEC 61672 Type 1 Spec.
Fast	Steady	127.0(Ref)	--	--
	200	126.0	-1.0	-1.0 ± 0.8dB
	2	108.9	-18.1	-18.0, +1.3 dB ~ -1.8 dB
	0.25	99.9	-27.1	-27.0, +1.3 dB ~ -3.3 dB
Slow	Steady	127.0(Ref)	--	--
	200	120.2	-6.8	-7.4 ± 0.8dB
	2	100.6	-26.4	-27.0, +1.3 dB ~ -3.3 dB
Time averaging	Steady	127.0(Ref)	--	--
	200	120.1	-6.9	-7.0±0.8dB
	2	99.5	-27.5	-27.0, +1.3 dB ~ -1.8 dB
	0.25	91.7	-35.3	-36.0, +1.3 dB ~ -3.3 dB

Uncertainty : ± 0.1 dB

7. Overload indication (130 dB range, A-weighted, Time-average, 4kHz)

UUT Reading at overload (dB)		Difference (dB)	IEC 61672 Type 1 Spec.
+ ve one half cycle	- ve one half cycle		
138.4	138.2	0.2	< 1.8 dB

The overload indicator latched on until reset

Uncertainty : ± 0.1 dB

Remarks : 1. UUT : Unit-Under-Test

2. The uncertainty claimed is for a confidence probability of not less than 95%.

3. Atmospheric Pressure : 996 hPa.

4. Preamplifier model : NH-25 , S/N : 10553

5. Firmware Version: 1.2

6. Power Supply Check: OK

7. The UUT was adjusted with the laboratory's sound calibrator at the reference sound pressure level before the calibration.

----- END -----



ALS Technichem (HK) Pty Ltd

REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION

CONTACT: MR IVAN LEUNG
CLIENT: ALS TECHNICHEM (HK) PTY LTD
ADDRESS: 11/F., CHUNG SHUN KNITTING CENTRE,
1-3 WING YIP STREET,
KWAI CHUNG,
N.T., HONG KONG
PROJECT: --

WORK ORDER: HK1324468
LABORATORY: HONG KONG
DATE RECEIVED: 25/10/2013
DATE OF ISSUE: 31/10/2013

COMMENTS

It is certified that the item under calibration/checking has been calibrated/checked by corresponding calibrated equipment in the laboratory.
Maximum Tolerance and calibration frequency stated in the report, unless otherwise stated, the internal acceptance criteria of ALS will be followed.

Scope of Test: Turbidity
Description: Turbidity meter
Brand Name: HACH
Model No.: HACH 2100Q
Serial No.: 12010C015757
Equipment No.: --
Date of Calibration: 31 October, 2013

NOTES

This is the Final Report and supersedes any preliminary report with this batch number.
Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release.

ISSUING LABORATORY: HONG KONG

Address

ALS Technichem (HK) Pty Ltd
11/F Chung Shun Knitting Centre
1-3 Wing Yip Street
Kwai Chung
HONG KONG

Phone: 852-2610 1044
Fax: 852-2610 2021
Email: hongkong@alsglobal.com

Mr. Fung Lim Chee, Richard
General Manager
Greater China & Hong Kong

This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.

Page 1 of 2

ADDRESS 11/F, Chung Shun Knitting Centre, 1-3 Wing Yip Street, Kwai Chung, N.T., Hong Kong PHONE +852 2610 1044 FAX +852 2610 2021
ALS TECHNICHEM (HK) PTY LTD Part of the ALS Laboratory Group A Campbell Brothers Limited Company

Life Sciences

www.alsglobal.com

RIGHT SOLUTIONS RIGHT PARTNER

REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION



Work Order: HK1324468
Date of Issue: 31/10/2013
Client: ALS TECHNICHEM (HK) PTY LTD

Description: Turbidity meter
Brand Name: HACH
Model No.: HACH 2100Q
Serial No.: 12010C015757
Equipment No.: --
Date of Calibration: 31 October, 2013

Date of next Calibration: 31 January, 2014

Parameters:

Turbidity

Method Ref: APHA (21st edition), 2130B

Expected Reading (NTU)	Displayed Reading (NTU)	Tolerance (%)
0	0.40	--
4	3.93	-1.8
40	40.5	1.3
80	79.2	-1.0
400	399	-0.3
800	808	1.0
	Tolerance Limit ($\pm\%$)	10.0



ALS Technichem (HK) Pty Ltd

REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION

CONTACT: MR SAM WONG
CLIENT: ENOVATIVE ENVIRONMENTAL SERVICE LIMITED
ADDRESS: RM 3704, SIK MAN HOUSE,
HOMANTIN ESTATE,
KOWLOON,
HONG KONG

WORK ORDER: HK1322943
LABORATORY: HONG KONG
DATE RECEIVED: 23/08/2013
DATE OF ISSUE: 30/08/2013

PROJECT: --

COMMENTS

It is certified that the item under calibration/checking has been calibrated/checked by corresponding calibrated equipment in the laboratory.
Maximum Tolerance and calibration frequency stated in the report, unless otherwise stated, the internal acceptance criteria of ALS will be followed.

Scope of Test: Conductivity, Dissolved Oxygen, pH, Salinity and Temperature
Equipment Type: Multimeter
Brand Name: YSI
Model No.: YSI Proplus
Serial No.: 10D101565
Equipment No.: --
Date of Calibration: 30 August, 2013

NOTES

This is the Final Report and supersedes any preliminary report with this batch number.
Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release.

ISSUING LABORATORY: HONG KONG

Address

ALS Technichem (HK) Pty Ltd
11/F Chung Shun Knitting Centre
1-3 Wing Yip Street
Kwai Chung
HONG KONG

Phone: 852-2610 1044
Fax: 852-2610 2021
Email: hongkong@alsglobal.com


Mr. Fung Lim Chee, Richard
General Manager -
Greater China & Hong Kong

This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.

Page 1 of 2

REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION



Work Order: HK1322943
Date of Issue: 30/08/2013
Client: ENOVATIVE ENVIRONMENTAL SERVICE LIMITED

Description: Multimeter
Brand Name: YSI
Model No.: YSI Proplus
Serial No.: 10D101565
Equipment No.: --

Date of Calibration: 30 August, 2013 **Date of next Calibration:** 30 November, 2013

Parameters:

Conductivity

Method Ref: APHA (21st edition), 2510B

Expected Reading (uS/cm)	Displayed Reading (uS/cm)	Tolerance (%)
146.9	151.1	2.9
6667	6549	-1.8
12890	12184	-5.5
58670	56852	-3.1
Tolerance Limit (±%)		10.0

Dissolved Oxygen

Method Ref: APHA (21st edition), 4500O: G

Expected Reading (mg/L)	Displayed Reading (mg/L)	Tolerance (mg/L)
5.18	5.27	0.09
7.59	7.71	0.12
8.75	8.76	0.01
Tolerance Limit (±mg/L)		0.20

pH Value

Method Ref: APHA 21st Ed. 4500H:B

Expected Reading (pH Unit)	Displayed Reading (pH Unit)	Tolerance (pH unit)
4.0	4.10	0.10
7.0	7.06	0.06
10.0	9.87	-0.13
Tolerance Limit (±pH unit)		0.20

Salinity

Method Ref: APHA (21st edition), 2520B

Expected Reading (ppt)	Displayed Reading (ppt)	Tolerance (%)
0	0.00	--
10	9.98	-0.2
20	19.98	-0.1
30	29.16	-2.8
Tolerance Limit (±%)		10.0

Temperature

Method Ref: Section 6 of International Accreditation New Zealand Technical Guide No. 3 Second edition March 2008: Working Thermometer Calibration Procedure.

Expected Reading (°C)	Displayed Reading (°C)	Tolerance (°C)
13.0	13.2	0.2
22.0	22.6	0.6
36.5	36.8	0.3
Tolerance Limit (±°C)		2.0

Remark: "Displayed Reading" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.


 Mr. Fung Lim Chee, Richard
 General Manager -
 Greater China & Hong Kong

Appendix D

EM&A Monitoring Schedules

**Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2
Impact Monitoring Schedule for November 2013**

November 2013						
Sun	Mon	Tue	Wed	Thu	Fri	Sat
					1	2
3	4	5 24-hour TSP + 3 x 1-hour TSP, Noise (SR77) Water (I5, C3a, C3b)	6	7 Water (I5, C3a, C3b)	8	9 Water (I5, C3a, C3b)
10	11 24-hour TSP + 3 x 1-hour TSP, Noise (SR77), Water (I5, C3a, C3b)	12	13 Water (I5, C3a, C3b)	14	15 Water (I5, C3a, C3b)	16 24-hour TSP + 3 x 1-hour TSP (SR77)
17	18 Water (I5, C3a, C3b)	19	20 Water (I5, C3a, C3b)	21	22 Water (I5, C3a, C3b), 24-hour TSP + 3 x 1-hour TSP, Noise (SR77)	23
24	25 Water (I5, C3a, C3b)	26	27 Water (I5, C3a, C3b)	28 24-hour TSP + 3 x 1-hour TSP, Noise (SR77)	29 Water (I5, C3a, C3b)	30

**Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2
Impact Monitoring Schedule for December 2013**

December 2013						
Sun	Mon	Tue	Wed	Thu	Fri	Sat
1	2 Water (I5, C3a, C3b)	3	4 24-hour TSP + 3 x 1-hour TSP, Noise (SR77) Water (I5, C3a, C3b)	5	6 Water (I5, C3a, C3b)	7
8	9 Water (I5, C3a, C3b)	10 24-hour TSP + 3 x 1-hour TSP, Noise (SR77)	11 Water (I5, C3a, C3b)	12	13 Water (I5, C3a, C3b)	14
15	16 Water (I5, C3a, C3b) 24-hour TSP + 3 x 1-hour TSP, Noise (SR77)	17	18 Water (I5, C3a, C3b)	19	20 Water (I5, C3a, C3b)	21 24-hour TSP + 3 x 1-hour TSP
22	23 ET Site Walk(09:00am – 11:00am) Water (I5, C3a, C3b)	24 Water (I5, C3a, C3b)	25 Christmas Day	26 The first weekday after Christmas Day	27 24-hour TSP + 3 x 1-hour TSP, Noise (SR77) Water (I5, C3a, C3b)	28
29	30 Water (I5, C3a, C3b)	31				

Appendix E

Air Quality Monitoring Results and their Graphical Presentation


Appendix E
Air Quality Monitoring Results and their Graphical Presentation

24-Hour TSP Monitoring Result at station: SR77

Sampling Date	Weather Condition	Paper No.	Wt. of paper (g)			Elapse Time			Flow Rate (CFM)			Flow Rate (m ³ /min)			Total Volume (m ³)	TSP Concentration (µg/m ³)	Action Level (µg/m ³)	Limit Level (µg/m ³)	Wind speed m/s	Wind direction
			Initial Wt.	Final Wt.	Wt. of Dust	Initial	Final	Sampling Hour	Initial	Final	Avg Flow Rate	Initial	Final	Avg Flow Rate						
5-Nov-13	Cloudy	026046	2.7344	2.8817	0.1473	0.00	24.00	24.00	51	51	51.0	1.44	1.44	1.44	2079.59	70.8	170.3	260.0	<5	N
11-Nov-13	Cloudy	026047	2.7294	2.8564	0.1270	0.00	24.00	24.00	51	51	51.0	1.44	1.44	1.44	2079.59	61.1	170.3	260.0	<5	N
16-Nov-13	Fine	205789	2.7214	3.1790	0.4576	0.00	24.00	24.00	51	51	51.0	1.44	1.44	1.44	2079.59	220.0	170.3	260.0	<5	N
22-Nov-13	Fine	205791	2.7471	3.1275	0.3804	0.00	24.00	24.00	51	51	51.0	1.44	1.44	1.44	2079.59	182.9	170.3	260.0	<5	N
28-Nov-13	Fine	205792	2.5360	3.1228	0.5868	0.00	24.00	24.00	51	51	51.0	1.44	1.44	1.44	2079.59	282.2	170.3	260.0	<5	N
																Average	163.4			
																Min	61.1			
																Max	282.2			

Note: No major dust source observed during the monitoring period

24-Hour TSP Monitoring Result at Station: SR77

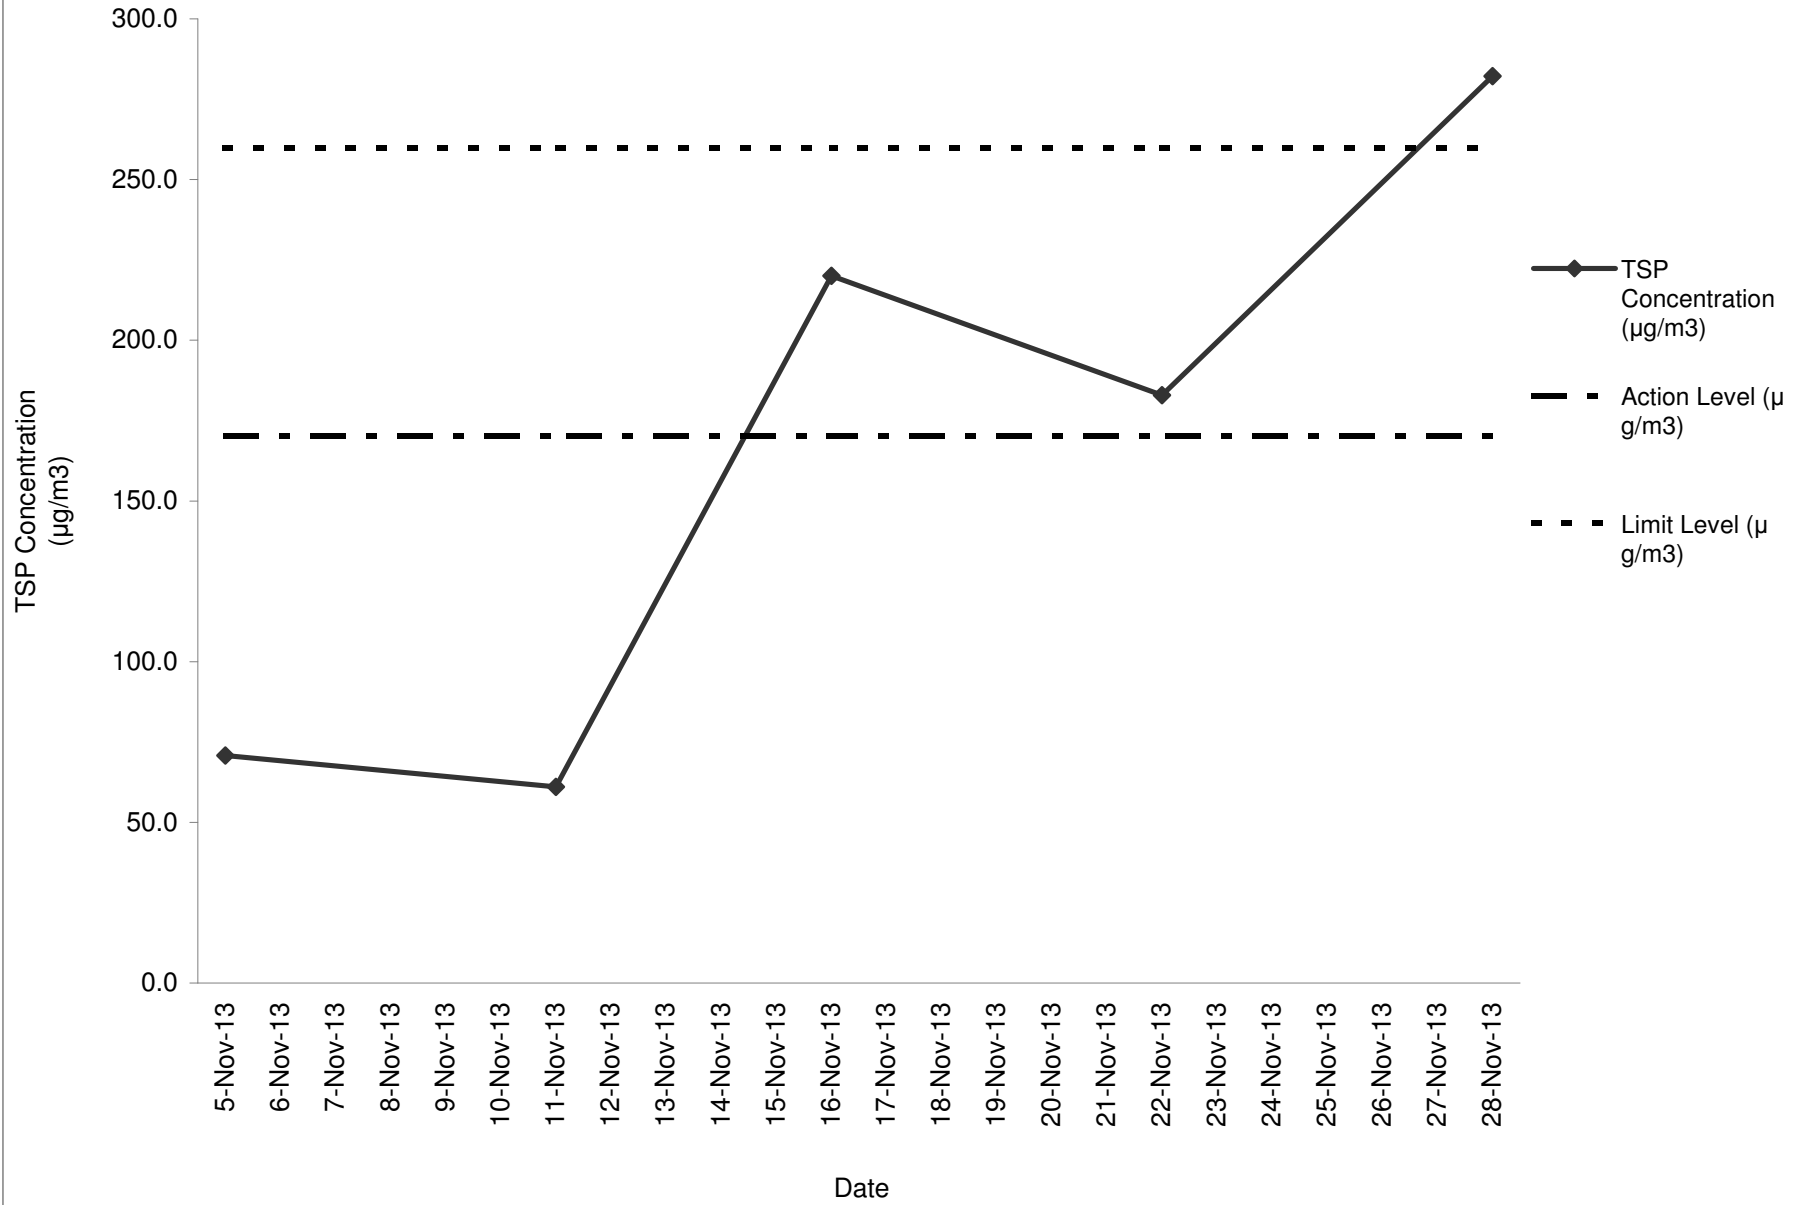


Appendix E
Air Quality Monitoring Results and their Graphical Presentation

1-Hour TSP Monitoring Result at station: SR77

Date	Weather Condition	Time	Conc.($\mu\text{g}/\text{m}^3$)			Action Level ($\mu\text{g}/\text{m}^3$)	Limit Level ($\mu\text{g}/\text{m}^3$)
			1 st Hour	2 nd Hour	3 rd Hour		
5-Nov-13	Cloudy	9:30 - 12:34	111.0	108.0	113.0	292.7	500.0
11-Nov-13	Cloudy	9:00 - 12:04	109.0	102.0	118.0	292.7	500.0
16-Nov-13	Fine	9:00 - 12:04	155.0	149.0	153.0	292.7	500.0
22-Nov-13	Fine	13:30 - 16:34	95.0	91.0	83.0	292.7	500.0
28-Nov-13	Fine	10:00 - 13:04	99.0	100.0	104.0	292.7	500.0
			Average		112.7		
			Max		155.0		
			Min		83.0		

Note: No major dust source observed during the monitoring period

1-Hour TSP Monitoring Result at station: SR77

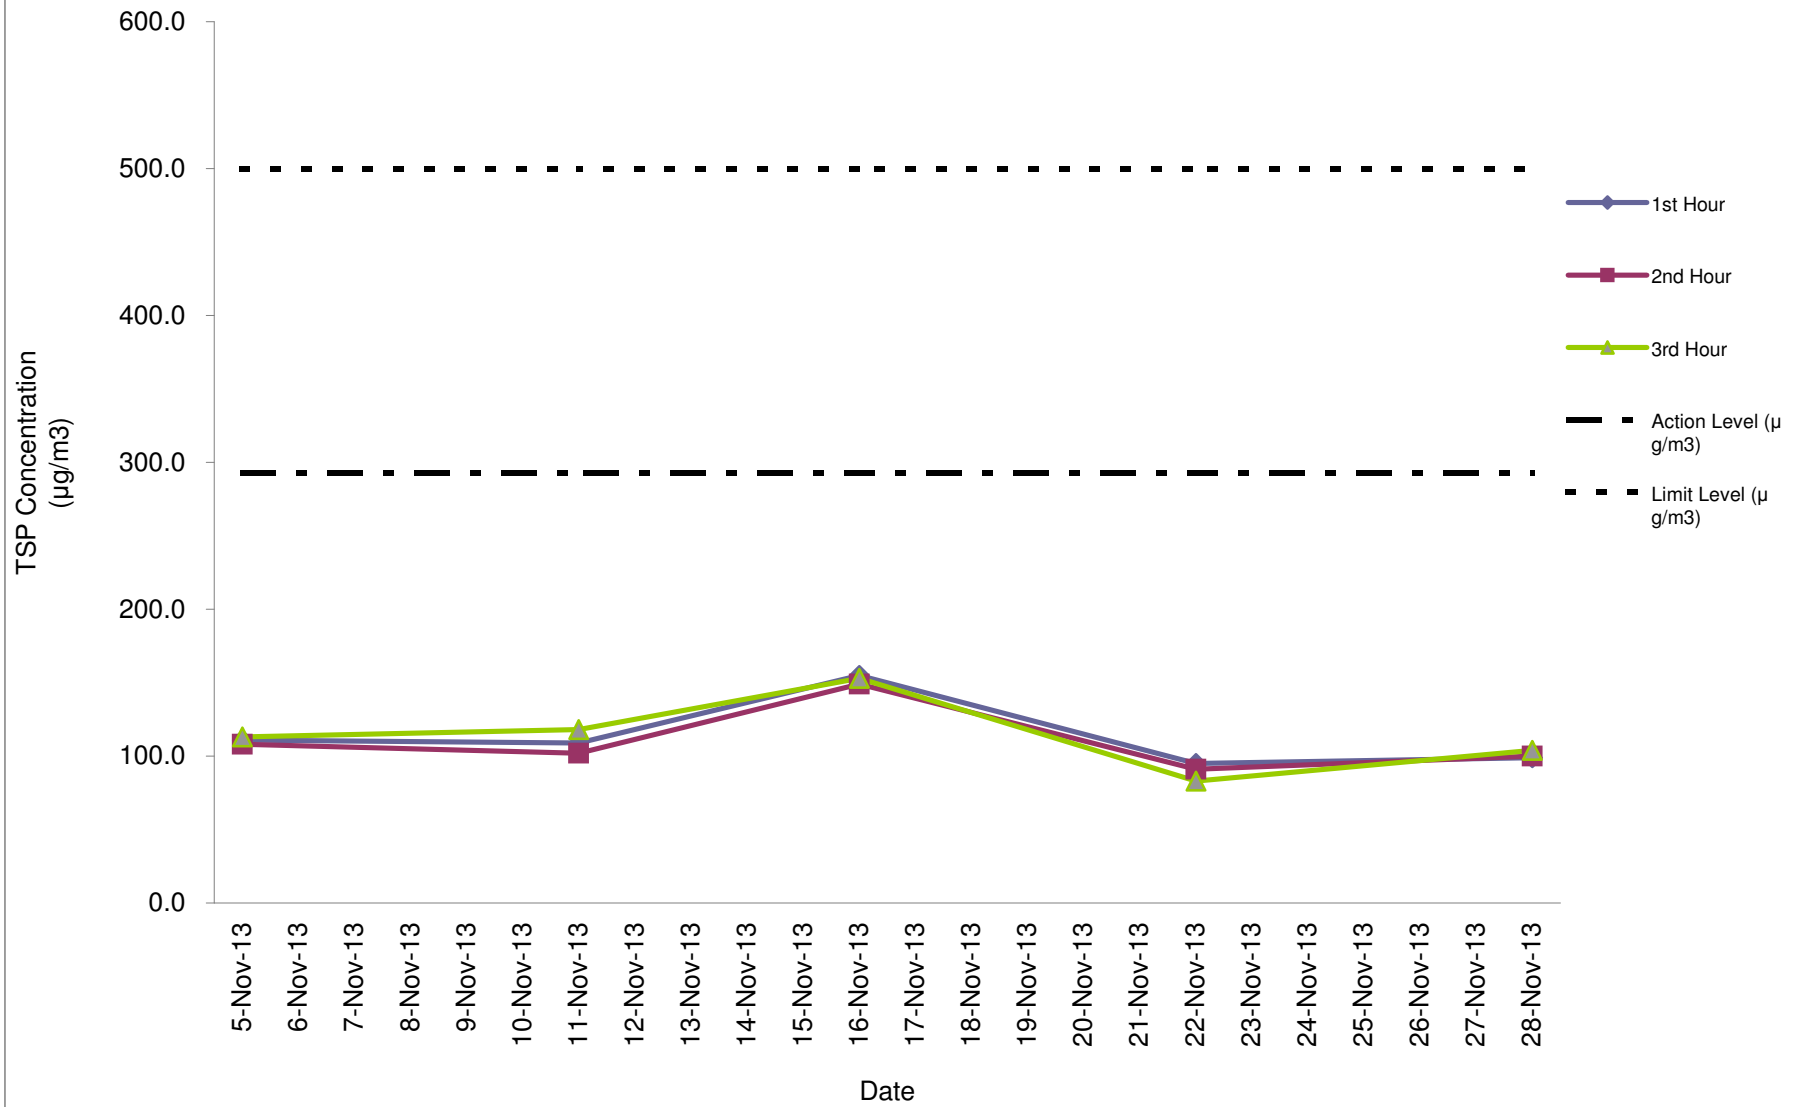

Appendix F

Summary of Event and Action Plan

Event and Action Plan for Air Quality

Event	Action			
	ET Leader	IEC	ER	Contractor
Action level being exceeded by one sampling day	<ol style="list-style-type: none"> 1. Identify source; 2. Inform IEC and ER; 3. Repeat measurement to confirm finding; 4. Increase monitoring frequency to daily. 	<ol style="list-style-type: none"> 1. Check monitoring data submitted by ET; 2. Check Contractor's working method. 	<ol style="list-style-type: none"> 1. Notify Contractor. 	<ol style="list-style-type: none"> 1. Rectify any unacceptable practice; 2. Amend working methods if appropriate.
Action level being exceeded by two or more consecutive sampling days	<ol style="list-style-type: none"> 1. Identify source; 2. Inform IEC and ER; 3. Repeat measurements to confirm findings; 4. Increase monitoring frequency to daily; 5. Discuss with IEC and Contractor on remedial actions required; 6. If exceedance continues, arrange meeting with IEC and ER; 7. If exceedance stops, cease additional monitoring. 	<ol style="list-style-type: none"> 1. Check monitoring data submitted by ET; 2. Check Contractor's working method; 3. Discuss with ET and Contractor on possible remedial measures; 4. Advise the ER on the effectiveness of the proposed remedial measures; 5. Supervise Implementation of remedial measures. 	<ol style="list-style-type: none"> 1. Confirm receipt of notification of failure in writing; 2. Notify Contractor; 3. Ensure remedial measures properly implemented. 	<ol style="list-style-type: none"> 1. Submit proposals for remedial actions to IEC within 3 working days of notification; 2. Implement the agreed proposals; 3. Amend proposal if appropriate.

Event	Action			
	ET Leader	IEC	ER	Contractor
Limit level being exceeded by one sampling day	<ol style="list-style-type: none"> 1. Identify source; 2. Inform IEC, ER, Contractor and EPD; 3. Repeat measurement to confirm finding; 4. Increase monitoring frequency to daily; 5. Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results. 	<ol style="list-style-type: none"> 1. Check monitoring data submitted by ET; 2. Check Contractor's working method; 3. Discuss with ET and Contractor on possible remedial measures; 4. Advise ER on the effectiveness of the proposed remedial measures; 5. Supervise implementation of remedial measures. 	<ol style="list-style-type: none"> 1. Confirm receipt of notification of exceedance in writing; 2. Notify Contractor; 3. Ensure remedial measures properly implemented. 	<ol style="list-style-type: none"> 1. Take immediate action to avoid further exceedance; 2. Submit proposals for remedial actions to IEC within 3 working days of notification; 3. Implement the agreed proposals; 4. Amend proposal if appropriate.
Limit level being exceeded by two or more consecutive sampling days	<ol style="list-style-type: none"> 1. Notify IEC, ER, Contractor, and EPD; 2. Identify source; 3. Repeat measurement to confirm findings; 4. Increase frequency to daily; 5. Analyse Contractor's working procedures to determine possible mitigation to be; 6. Arrange meeting with IEC and ER to discuss the remedial actions to be taken; 7. Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results; 8. If exceedance stops, cease additional monitoring. 	<ol style="list-style-type: none"> 1. Discuss amongst ER, ET, and Contractor on the potential remedial actions; 2. Review Contractor's remedial actions whenever necessary to assure their effectiveness and advise ER accordingly; 3. Supervise the implementation of remedial measures. 	<ol style="list-style-type: none"> 1. Confirm receipt of notification of exceedance in writing; 2. Notify Contractor; 3. In consultation with the IEC, agree with the Contractor on the remedial measures to be implemented; 4. Ensure remedial measures properly implemented; 5. If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated. 	<ol style="list-style-type: none"> 1. Take immediate action to avoid further exceedance; 2. Submit proposals for remedial actions to IEC within 3 working days of notification; 3. Implement the agreed proposals; 4. Resubmit proposals if problem still not under control; 5. Stop the relevant portion of works as determined by ER until the exceedance is abated.

Event and Action Plan for Noise Quality

Event	Action			
	ET Leader	IEC	ER	Contractor
Action Level	<ol style="list-style-type: none"> 1. Notify IEC and the Contractor. 2. Carry out investigation. 3. Report the results of investigation to IEC and the Contractor. 4. Discuss with the Contractor and formulate remedial measures. 5. Increase monitoring frequency to check mitigation effectiveness. 	<ol style="list-style-type: none"> 1. Review with analysed results submitted by ET. 2. Review the proposed remedial measures by the Contractor and advise ER accordingly. 3. Supervise the implement of remedial measures. 	<ol style="list-style-type: none"> 1. Confirm receipt of notification of failure in writing. 2. Notify the Contractor. 3. Require the Contractor to propose remedial measures for the analysed noise problem. 4. Ensure remedial measures are properly implemented. 	<ol style="list-style-type: none"> 1. Submit noise mitigation proposals to IEC. 2. Implement noise mitigation proposals.
Limit Level	<ol style="list-style-type: none"> 1. Notify IEC, ER, EPD and the Contractor. 2. Identify the source. 3. Repeat measurement to confirm findings. 4. Increase monitoring frequency. 5. Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented. 6. Inform IEC, ER, and EPD the causes & actions taken for the exceedances. 7. Assess effectiveness of the Contractor's remedial actions and keep IEC, EPD and ER informed of the results. 8. If exceedance stops, cease additional monitoring. 	<ol style="list-style-type: none"> 1. Discuss amongst ER, ET Leader and the Contractor on the potential remedial actions. 2. Review the Contractor's remedial actions whenever necessary to assure their effectiveness and advise ER accordingly. 3. Supervise the implementation of remedial measures. 	<ol style="list-style-type: none"> 1. Confirm receipt of notification of failure in writing. 2. Notify the Contractor. 3. Require the Contractor to propose remedial measures for the analysed noise problem. 4. Ensure remedial measures are properly implemented. 5. If exceedance continues, consider what activity of the work is responsible and instruct the Contractor to stop that activity of work until the exceedance is abated. 	<ol style="list-style-type: none"> 1. Take immediate action to avoid further exceedance. 2. Submit proposals for remedial actions to IEC within 3 working days of notification. 3. Implement the agreed proposals. 4. Resubmit proposals if problem still not under control. 5. Stop the relevant activity of works as determined by the ER until the exceedance is abated.

Event and Action Plan for Water Quality

Event	Action			
	ET Leader	IEC	ER	Contractor
Action level being exceeded by one sampling day	<ol style="list-style-type: none"> 1. Repeat in-situ measurement on next day of exceedance to confirm findings; 2. Identify source(s) of impact; 3. Inform IEC, Contractor & ER; 4. Check monitoring data, all plant, equipment & contractor's working methods; 	<ol style="list-style-type: none"> 1. Check monitoring data submitted by ET & Contractor's working methods; 	<ol style="list-style-type: none"> 1. Confirm receipt of notification of failure in writing; Notify, Contractor 	<ol style="list-style-type: none"> 1. Inform the ER & confirm notification of the non-compliance in writing; 2. Rectify unacceptable practice; 3. Amend working methods if appropriate.
Action level being exceeded by two or more consecutive sampling days	<ol style="list-style-type: none"> 1. Repeat measurement on next day of exceedance to confirm findings; 2. Identify source(s) of impact; 3. Inform IEC, Contractor, ER & EPD; 4. Check monitoring data, all plant, equipment & Contractor's working methods; 5. Discuss mitigation measures with IEC, ER & Contractor; 6. Ensure mitigation measures are implemented; 7. Increase monitoring to daily until no exceedance of Action level. 	<ol style="list-style-type: none"> 1. Checking monitoring data submitted by ET & Contractor's working method; 2. Discuss with ET & Contractor on possible remedial actions; 3. Review the proposed mitigation measures submitted by Contractor & advise the ER accordingly; 4. Supervise the implementation of mitigation measures. 	<ol style="list-style-type: none"> 1. Discuss with IEC on the proposed mitigation measures; 2. Ensure mitigation measures properly implemented; 3. Assess the effectiveness of the implemented mitigation measures. 	<ol style="list-style-type: none"> 1. Inform the Engineer & confirm notification of the non-compliance in writing; 2. Rectify unacceptable practice; 3. Check all plant & equipment & consider changes of working methods; 4. Submit proposal of mitigation measures to ER within 3 working days of notification & discuss with ET, IEC & ER; 5. Implement the agreed mitigation measures.

Event	Action			
	ET Leader	IEC	ER	Contractor
Limit level being exceeded by one sampling day	<ol style="list-style-type: none"> 1. Repeat measurement on next day of exceedance to confirm findings; 2. Identify source(s) of impact; 3. Inform IEC, contractor, ER & EPD; 4. Check monitoring data, all plant, equipment & contractor's working methods; 5. Discuss mitigation measures with IEC, Contractor & ER. 	<ol style="list-style-type: none"> 1. Checking monitoring data submitted by ET & Contractor's working method; 2. Discuss with ET & Contractor on the possible mitigation measures; 3. Review the proposed mitigation measures submitted by Contractor & advise the ER accordingly. 	<ol style="list-style-type: none"> 1. Confirm receipt of notification of failure in writing; 2. Discuss with IEC, ET & Contractor on the proposed mitigation measures; 3. Request Contractor to review the working methods. 	<ol style="list-style-type: none"> 1. Inform the ER & confirm notification of the non-compliance in writing; 2. Rectify unacceptable practice; 3. Check all plant & equipment & consider changes of working methods; 4. Submit proposal of mitigation measures to ER within 3 working days of notification & discuss with ET, IEC & ER.
Limit level being exceeded by two or more consecutive sampling days	<ol style="list-style-type: none"> 1. Repeat measurement on the next day of exceedance to confirm findings; 2. Identify source(s) of impact; 3. Inform IEC, Contractor, ER & EPD; 4. Check monitoring data, all plant, equipment & Contractor's working methods; 5. Discuss mitigation measures within IEC, Contractor & ER; 6. Ensure mitigation measures are implemented; 7. Increase the monitoring frequency to daily until no exceedance of Limit level for two consecutive days. 	<ol style="list-style-type: none"> 1. Checking monitoring data submitted by ET & Contractor's working method; 2. Discuss with ET & Contractor on potential remedial actions; 3. Review Contractor's mitigation measures whenever necessary to assure their effectiveness & advise the ER accordingly; 4. Supervise the implementation of mitigation measures. 	<ol style="list-style-type: none"> 1. Discuss with IEC, ET & Contractor on the proposed mitigation measures; 2. Request Contractor to critically review the working methods; 3. Make agreement on the mitigation measures to be implemented; 4. Ensure mitigation measures are properly implemented; 5. Consider & instruct, if necessary, the Contractor to slow down or to stop all or part of the construction activities until no exceedance of Limit level. 	<ol style="list-style-type: none"> 1. Take immediate action to avoid further exceedance; 2. Submit proposal of mitigation measures to ER within 3 working days of notification & discuss with ET, IEC & ER; 3. Implement the agreed mitigation measures; 4. Resubmit proposals of mitigation measures if problem still not under control; 5. As directed by the Engineer, to slow down or to stop all or part of the construction activities until no exceedance of Limit level.

Appendix G

Noise Monitoring Results and their Graphical Presentation


Project Name:

Contract No. CV/2012/09 Liantang / Heung Yuen Wai Boundary Control Point Site Formation and Infrastructure works - Contract 3
Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling - Stage 2

Noise Monitoring Result at SR77

Date	Weather Condition	Start Time	End Time	Measured Noise Level (dB(A))			Baseline Corrected Level, dB(A)	Baseline Noise Level (dB(A)), Leq(30min)	Limit Level dB(A)	Exceedance (Y / N)
				L10(30min)	L90(30min)	Leq(30min)				
2013/11/05	Cloudy	9:30	10:00	72.4	61.1	69.1	-	67.8	75.0	N
2013/11/11	Cloudy	10:30	11:00	72.9	62.2	71.3	-	67.8	75.0	N
2013/11/16	Fine	10:00	10:30	73.2	63.1	71.1	-	67.8	75.0	N
2013/11/22	Fine	13:30	14:00	70.5	58.5	67.6	-	67.8	75.0	N
2013/11/28	Fine	10:30	11:00	74.1	77.5	71.5	-	67.8	75.0	N
				Average	70.1					
				Minimum	67.6					
				Maximum	71.5					

Noise monitoring result: SR77

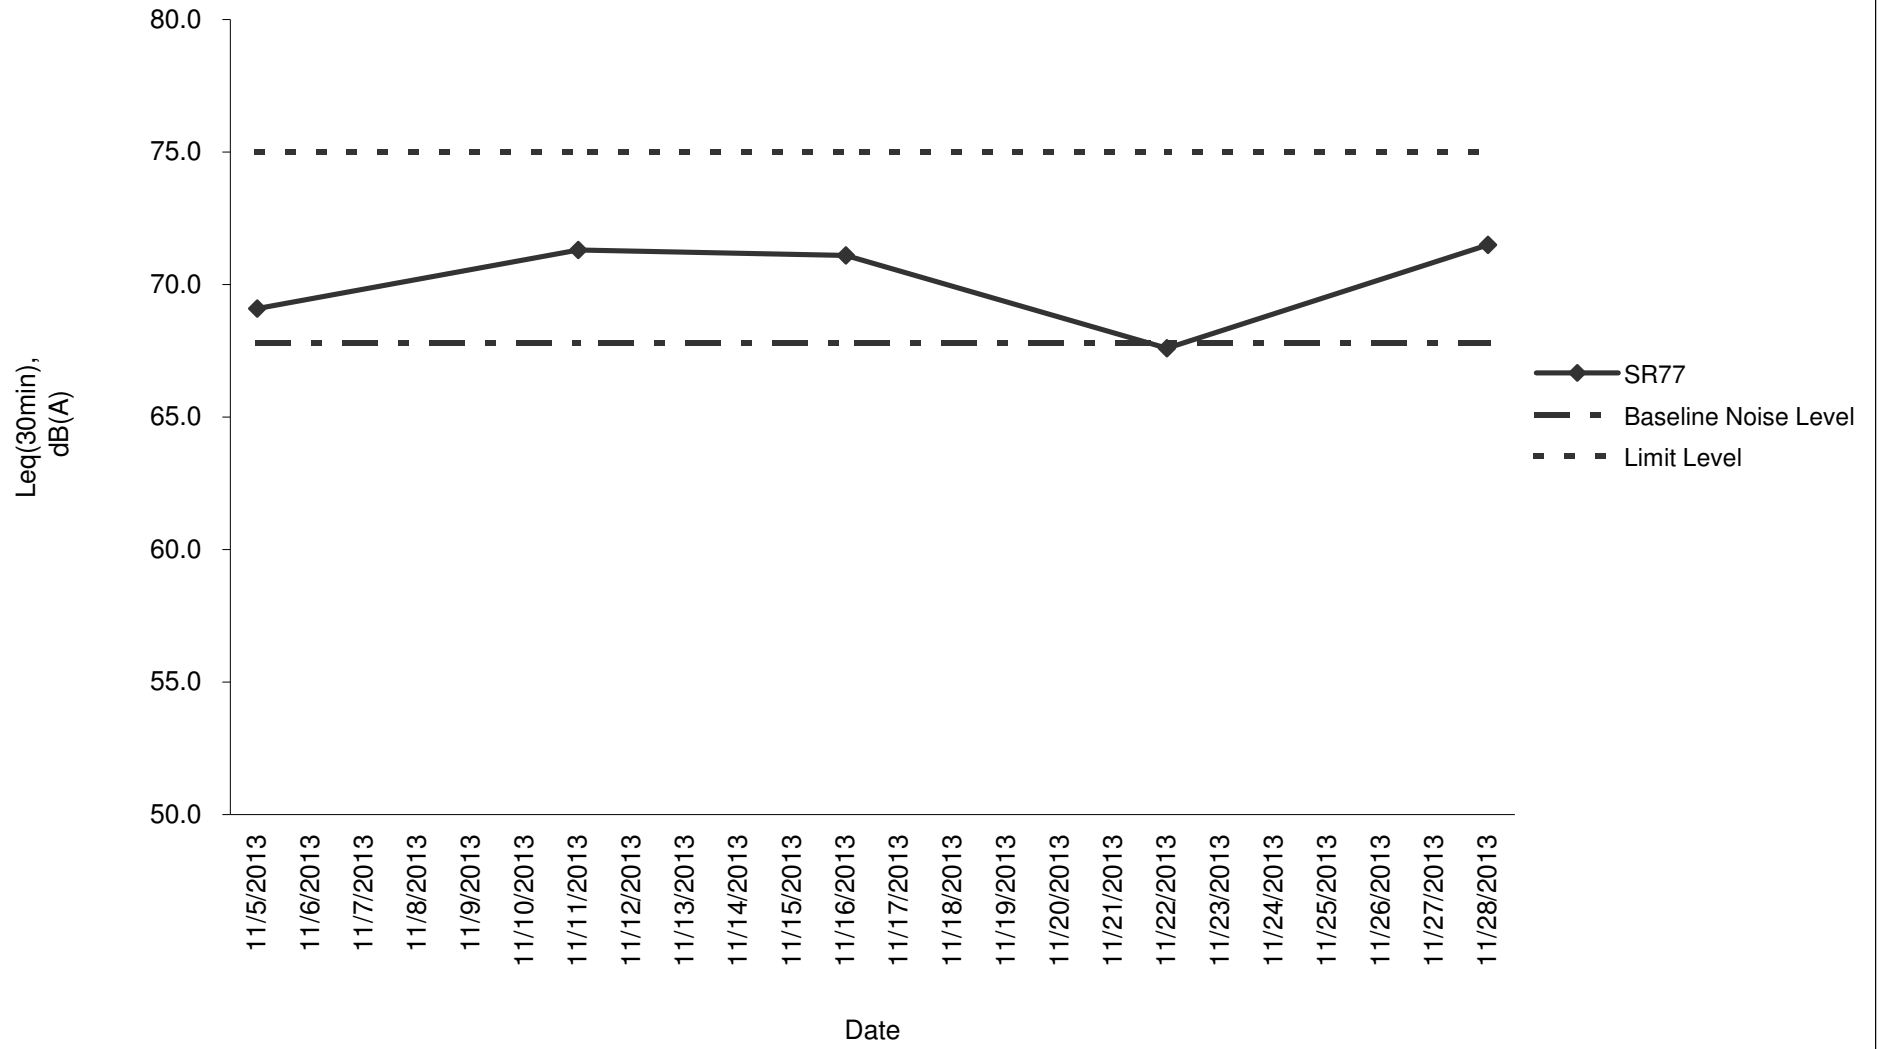

Appendix H

Laboratory Results for Water Quality



CERTIFICATE OF ANALYSIS

<i>Client</i>	: ENOVATIVE ENVIRONMENTAL SERVICE LTD	<i>Laboratory</i>	: ALS Technichem HK Pty Ltd	<i>Page</i>	: 1 of 3
<i>Contact</i>	: MR THOMAS WONG	<i>Contact</i>	: Fung Lim Chee, Richard	<i>Work Order</i>	: HK1330533
<i>Address</i>	: RM 3704, SIK MAN HOUSE, HOMANTIN ESTATE, KOWLOON, HONG KONG	<i>Address</i>	: 11/F., Chung Shun Knitting Centre, 1 - 3 Wing Yip Street, Kwai Chung, N.T., Hong Kong		
<i>E-mail</i>	: thomas.wong@eno.com.hk	<i>E-mail</i>	: Richard.Fung@alsglobal.com		
<i>Telephone</i>	: +852 22421020	<i>Telephone</i>	: +852 2610 1044		
<i>Facsimile</i>	: +852 27143612	<i>Facsimile</i>	: +852 2610 2021		
<i>Project</i>	: CONTRACT NO CV_2012_09 LIANTANG_HEUNG YUEN WAI BOUNDARY CONTROL POINT SITE FORMATION	<i>Quote number</i>	: ----	<i>Date received</i>	: 05-NOV-2013
<i>Order number</i>	: ----			<i>Date of issue</i>	: 12-NOV-2013
<i>C-O-C number</i>	: ----			<i>No. of samples</i>	- Received : 6
<i>Site</i>	: ----				- Analysed : 6

Report Comments

This report for ALS Technichem (HK) Pty Ltd work order reference HK1330533 supersedes any previous reports with this reference. The completion date of analysis is 11-NOV-2013. Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release. When date(s) and/or time(s) are shown bracketed, these have been assumed by the laboratory for process purposes. Abbreviations: CAS number = Chemical Abstract Services number. LOR = Limit of reporting.

Specific comments for Work Order HK1330533 : Project Name: Contract No. CV/2012/09 Liantang / Heung Yuen Wai Boundary Control Point Site Formation and Infrastructure works - Contract 3 Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling - Stage 2.
Sample(s) were received in a chilled condition.
Water sample(s) analysed and reported on an as received basis.

This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.

This document has been electronically signed by those names that appear on this report and are the authorised signatories. Electronic signing has been carried out in compliance with procedures specified in the 'Electronic Transactions Ordinance' of Hong Kong, Chapter 553, Section 6.

<i>Signatory</i>	<i>Position</i>	<i>Authorised results for:-</i>
Fung Lim Chee, Richard	General Manager	Inorganics



Analytical Results

Sub-Matrix: WATER

			Compound				
			EA025: Suspended Solids (SS)				
			LOR Unit	2 mg/L			
Client sample ID	Client sampling date / time	Laboratory sample ID	EA/ED: Physical and Aggregate Properties				
C3A-1	[05-NOV-2013]	HK1330533-001	8				
C3A-2	[05-NOV-2013]	HK1330533-002	9				
C3B-1	[05-NOV-2013]	HK1330533-003	52				
C3B-2	[05-NOV-2013]	HK1330533-004	52				
I5-1	[05-NOV-2013]	HK1330533-005	7				
I5-2	[05-NOV-2013]	HK1330533-006	6				



Laboratory Duplicate (DUP) Report

Matrix: WATER				Laboratory Duplicate (DUP) Report				
Laboratory sample ID	Client sample ID	Method: Compound	CAS Number	LOR	Unit	Original Result	Duplicate Result	RPD (%)
EA/ED: Physical and Aggregate Properties (QC Lot: 3151539)								
HK1330419-001	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	<2	<2	0.0
HK1330450-009	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	428	437	2.2

Method Blank (MB), Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report

Matrix: WATER			Method Blank (MB) Report			Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report					
Method: Compound	CAS Number	LOR	Unit	Result	Spike Concentration	Spike Recovery (%)		Recovery Limits (%)		RPDs (%)	
						LCS	DCS	Low	High	Value	Control Limit
EA/ED: Physical and Aggregate Properties (QCLot: 3151539)											
EA025: Suspended Solids (SS)	----	2	mg/L	<2	10 mg/L	99.0	----	86	112	----	----

Matrix Spike (MS) and Matrix Spike Duplicate (MSD) Report

- No Matrix Spike (MS) or Matrix Spike Duplicate (MSD) Results are required to be reported.



CERTIFICATE OF ANALYSIS

<i>Client</i>	: ENOVATIVE ENVIRONMENTAL SERVICE LTD	<i>Laboratory</i>	: ALS Technichem HK Pty Ltd	<i>Page</i>	: 1 of 3
<i>Contact</i>	: MR THOMAS WONG	<i>Contact</i>	: Fung Lim Chee, Richard	<i>Work Order</i>	: HK1330704
<i>Address</i>	: RM 3704, SIK MAN HOUSE, HOMANTIN ESTATE, KOWLOON, HONG KONG	<i>Address</i>	: 11/F., Chung Shun Knitting Centre, 1 - 3 Wing Yip Street, Kwai Chung, N.T., Hong Kong		
<i>E-mail</i>	: thomas.wong@eno.com.hk	<i>E-mail</i>	: Richard.Fung@alsglobal.com		
<i>Telephone</i>	: +852 22421020	<i>Telephone</i>	: +852 2610 1044		
<i>Facsimile</i>	: +852 27143612	<i>Facsimile</i>	: +852 2610 2021		
<i>Project</i>	: CONTRACT NO CV_2012_09 LIANTANG_HEUNG YUEN WAI BOUNDARY CONTROL POINT SITE FORMATION	<i>Quote number</i>	: ----	<i>Date received</i>	: 07-NOV-2013
<i>Order number</i>	: ----			<i>Date of issue</i>	: 12-NOV-2013
<i>C-O-C number</i>	: ----			<i>No. of samples</i>	- Received : 6
<i>Site</i>	: ----				- Analysed : 6

Report Comments

This report for ALS Technichem (HK) Pty Ltd work order reference HK1330704 supersedes any previous reports with this reference. The completion date of analysis is 11-NOV-2013. Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release. When date(s) and/or time(s) are shown bracketed, these have been assumed by the laboratory for process purposes. Abbreviations: CAS number = Chemical Abstract Services number. LOR = Limit of reporting.

Specific comments for Work Order HK1330704 : Project Name: Contract No. CV/2012/09 Liantang / Heung Yuen Wai Boundary Control Point Site Formation and Infrastructure works - Contract 3 Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling - Stage 2.
Sample(s) were received in a chilled condition.
Water sample(s) analysed and reported on an as received basis.

This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.

This document has been electronically signed by those names that appear on this report and are the authorised signatories. Electronic signing has been carried out in compliance with procedures specified in the 'Electronic Transactions Ordinance' of Hong Kong, Chapter 553, Section 6.

<i>Signatory</i>	<i>Position</i>	<i>Authorised results for:-</i>
Fung Lim Chee, Richard	General Manager	Inorganics



Analytical Results

Sub-Matrix: WATER

			Compound				
			EA025: Suspended Solids (SS)				
			LOR Unit	2 mg/L			
Client sample ID	Client sampling date / time	Laboratory sample ID	EA/ED: Physical and Aggregate Properties				
C3A-1	[07-NOV-2013]	HK1330704-001	17				
C3A-2	[07-NOV-2013]	HK1330704-002	16				
C3B-1	[07-NOV-2013]	HK1330704-003	37				
C3B-2	[07-NOV-2013]	HK1330704-004	38				
I5-1	[07-NOV-2013]	HK1330704-005	32				
I5-2	[07-NOV-2013]	HK1330704-006	31				



Laboratory Duplicate (DUP) Report

Matrix: WATER				Laboratory Duplicate (DUP) Report				
Laboratory sample ID	Client sample ID	Method: Compound	CAS Number	LOR	Unit	Original Result	Duplicate Result	RPD (%)
EA/ED: Physical and Aggregate Properties (QC Lot: 3151540)								
HK1330537-001	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	<2	<2	0.0
HK1330572-004	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	4	3	0.0
EA/ED: Physical and Aggregate Properties (QC Lot: 3151541)								
HK1330704-003	C3B-1	EA025: Suspended Solids (SS)	----	2	mg/L	37	39	3.3
HK1330824-001	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	6	6	0.0

Method Blank (MB), Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report

Matrix: WATER			Method Blank (MB) Report			Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report					
Method: Compound	CAS Number	LOR	Unit	Result	Spike Concentration	Spike Recovery (%)		Recovery Limits (%)		RPDs (%)	
						LCS	DCS	Low	High	Value	Control Limit
EA/ED: Physical and Aggregate Properties (QCLot: 3151540)											
EA025: Suspended Solids (SS)	----	2	mg/L	<2	10 mg/L	98.5	----	86	112	----	----
EA/ED: Physical and Aggregate Properties (QCLot: 3151541)											
EA025: Suspended Solids (SS)	----	2	mg/L	<2	10 mg/L	102	----	86	112	----	----

Matrix Spike (MS) and Matrix Spike Duplicate (MSD) Report

- No Matrix Spike (MS) or Matrix Spike Duplicate (MSD) Results are required to be reported.



CERTIFICATE OF ANALYSIS

<i>Client</i>	: ENOVATIVE ENVIRONMENTAL SERVICE LTD	<i>Laboratory</i>	: ALS Technichem HK Pty Ltd	<i>Page</i>	: 1 of 3
<i>Contact</i>	: MR THOMAS WONG	<i>Contact</i>	: Fung Lim Chee, Richard	<i>Work Order</i>	: HK1331105
<i>Address</i>	: RM 3704, SIK MAN HOUSE, HOMANTIN ESTATE, KOWLOON, HONG KONG	<i>Address</i>	: 11/F., Chung Shun Knitting Centre, 1 - 3 Wing Yip Street, Kwai Chung, N.T., Hong Kong		
<i>E-mail</i>	: thomas.wong@eno.com.hk	<i>E-mail</i>	: Richard.Fung@alsglobal.com		
<i>Telephone</i>	: +852 22421020	<i>Telephone</i>	: +852 2610 1044		
<i>Facsimile</i>	: +852 27143612	<i>Facsimile</i>	: +852 2610 2021		
<i>Project</i>	: CONTRACT NO CV_2012_09 LIANTANG_HEUNG YUEN WAI BOUNDARY CONTROL POINT SITE FORMATION	<i>Quote number</i>	: ----	<i>Date received</i>	: 09-NOV-2013
<i>Order number</i>	: ----			<i>Date of issue</i>	: 13-NOV-2013
<i>C-O-C number</i>	: ----			<i>No. of samples</i>	- Received : 6
<i>Site</i>	: ----				- Analysed : 6

Report Comments

This report for ALS Technichem (HK) Pty Ltd work order reference HK1331105 supersedes any previous reports with this reference. The completion date of analysis is 11-NOV-2013. Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release. When date(s) and/or time(s) are shown bracketed, these have been assumed by the laboratory for process purposes. Abbreviations: CAS number = Chemical Abstract Services number. LOR = Limit of reporting.

Specific comments for Work Order HK1331105 : Project Name: Contract No. CV/2012/09 Liantang / Heung Yuen Wai Boundary Control Point Site Formation and Infrastructure Works - Contract 3 Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling - Stage 2.
Sample(s) were received in a chilled condition.
Water sample(s) analysed and reported on an as received basis.

This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.

This document has been electronically signed by those names that appear on this report and are the authorised signatories. Electronic signing has been carried out in compliance with procedures specified in the 'Electronic Transactions Ordinance' of Hong Kong, Chapter 553, Section 6.

<i>Signatory</i>	<i>Position</i>	<i>Authorised results for:-</i>
Fung Lim Chee, Richard	General Manager	Inorganics



Analytical Results

Sub-Matrix: WATER

			Compound				
			EA025: Suspended Solids (SS)				
			LOR Unit	2 mg/L			
Client sample ID	Client sampling date / time	Laboratory sample ID	EA/ED: Physical and Aggregate Properties				
C3A-1	[09-NOV-2013]	HK1331105-001	24				
C3A-2	[09-NOV-2013]	HK1331105-002	24				
C3B-1	[09-NOV-2013]	HK1331105-003	27				
C3B-2	[09-NOV-2013]	HK1331105-004	27				
I5-1	[09-NOV-2013]	HK1331105-005	20				
I5-2	[09-NOV-2013]	HK1331105-006	22				



Laboratory Duplicate (DUP) Report

Matrix: WATER

				Laboratory Duplicate (DUP) Report				
Laboratory sample ID	Client sample ID	Method: Compound	CAS Number	LOR	Unit	Original Result	Duplicate Result	RPD (%)
EA/ED: Physical and Aggregate Properties (QC Lot: 3152902)								
HK1330997-001	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	2	3	0.0
HK1331105-001	C3A-1	EA025: Suspended Solids (SS)	----	2	mg/L	24	23	4.4

Method Blank (MB), Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report

Matrix: WATER

			Method Blank (MB) Report			Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report					
Method: Compound	CAS Number	LOR	Unit	Result	Spike Concentration	Spike Recovery (%)		Recovery Limits (%)		RPDs (%)	
						LCS	DCS	Low	High	Value	Control Limit
EA/ED: Physical and Aggregate Properties (QCLot: 3152902)											
EA025: Suspended Solids (SS)	----	2	mg/L	<2	10 mg/L	106	----	86	112	----	----

Matrix Spike (MS) and Matrix Spike Duplicate (MSD) Report

- No Matrix Spike (MS) or Matrix Spike Duplicate (MSD) Results are required to be reported.



CERTIFICATE OF ANALYSIS

<i>Client</i>	: ENOVATIVE ENVIRONMENTAL SERVICE LTD	<i>Laboratory</i>	: ALS Technichem HK Pty Ltd	<i>Page</i>	: 1 of 3
<i>Contact</i>	: MR THOMAS WONG	<i>Contact</i>	: Fung Lim Chee, Richard	<i>Work Order</i>	: HK1331165
<i>Address</i>	: RM 3704, SIK MAN HOUSE, HOMANTIN ESTATE, KOWLOON, HONG KONG	<i>Address</i>	: 11/F., Chung Shun Knitting Centre, 1 - 3 Wing Yip Street, Kwai Chung, N.T., Hong Kong		
<i>E-mail</i>	: thomas.wong@eno.com.hk	<i>E-mail</i>	: Richard.Fung@alsglobal.com		
<i>Telephone</i>	: +852 22421020	<i>Telephone</i>	: +852 2610 1044		
<i>Facsimile</i>	: +852 27143612	<i>Facsimile</i>	: +852 2610 2021		
<i>Project</i>	: CONTRACT NO CV_2012_09 LIANTANG_HEUNG YUEN WAI BOUNDARY CONTROL POINT SITE FORMATION	<i>Quote number</i>	: ----	<i>Date received</i>	: 11-NOV-2013
<i>Order number</i>	: ----			<i>Date of issue</i>	: 14-NOV-2013
<i>C-O-C number</i>	: ----			<i>No. of samples</i>	- Received : 6
<i>Site</i>	: ----				- Analysed : 6

Report Comments

This report for ALS Technichem (HK) Pty Ltd work order reference HK1331165 supersedes any previous reports with this reference. The completion date of analysis is 13-NOV-2013. Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release. When date(s) and/or time(s) are shown bracketed, these have been assumed by the laboratory for process purposes. Abbreviations: CAS number = Chemical Abstract Services number. LOR = Limit of reporting.

Specific comments for Work Order HK1331165 : Project Name: Contract No. CV/2012/09 Liantang / Heung Yuen Wai Boundary Control Point Site Formation and Infrastructure Works - Contract 3 Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling - Stage 2.
Sample(s) were received in a chilled condition.
Water sample(s) analysed and reported on an as received basis.

This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.

This document has been electronically signed by those names that appear on this report and are the authorised signatories. Electronic signing has been carried out in compliance with procedures specified in the 'Electronic Transactions Ordinance' of Hong Kong, Chapter 553, Section 6.

<i>Signatory</i>	<i>Position</i>	<i>Authorised results for:-</i>
Fung Lim Chee, Richard	General Manager	Inorganics



Analytical Results

Sub-Matrix: WATER

			Compound				
			EA025: Suspended Solids (SS)				
			LOR Unit	2 mg/L			
Client sample ID	Client sampling date / time	Laboratory sample ID	EA/ED: Physical and Aggregate Properties				
C3A-1	[11-NOV-2013]	HK1331165-001	34				
C3A-2	[11-NOV-2013]	HK1331165-002	33				
C3B-1	[11-NOV-2013]	HK1331165-003	130				
C3B-2	[11-NOV-2013]	HK1331165-004	136				
I5-1	[11-NOV-2013]	HK1331165-005	12				
I5-2	[11-NOV-2013]	HK1331165-006	14				



Laboratory Duplicate (DUP) Report

Matrix: WATER

				Laboratory Duplicate (DUP) Report				
Laboratory sample ID	Client sample ID	Method: Compound	CAS Number	LOR	Unit	Original Result	Duplicate Result	RPD (%)
EA/ED: Physical and Aggregate Properties (QC Lot: 3155911)								
HK1331112-001	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	<2	<2	0.0
HK1331160-007	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	21	19	9.3

Method Blank (MB), Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report

Matrix: WATER

			Method Blank (MB) Report			Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report					
Method: Compound	CAS Number	LOR	Unit	Result	Spike Concentration	Spike Recovery (%)		Recovery Limits (%)		RPDs (%)	
						LCS	DCS	Low	High	Value	Control Limit
EA/ED: Physical and Aggregate Properties (QCLot: 3155911)											
EA025: Suspended Solids (SS)	----	2	mg/L	<2	10 mg/L	99.5	----	86	112	----	----

Matrix Spike (MS) and Matrix Spike Duplicate (MSD) Report

- No Matrix Spike (MS) or Matrix Spike Duplicate (MSD) Results are required to be reported.



CERTIFICATE OF ANALYSIS

<i>Client</i>	: ENOVATIVE ENVIRONMENTAL SERVICE LTD	<i>Laboratory</i>	: ALS Technichem HK Pty Ltd	<i>Page</i>	: 1 of 3
<i>Contact</i>	: MR THOMAS WONG	<i>Contact</i>	: Fung Lim Chee, Richard	<i>Work Order</i>	: HK1331449
<i>Address</i>	: RM 3704, SIK MAN HOUSE, HOMANTIN ESTATE, KOWLOON, HONG KONG	<i>Address</i>	: 11/F., Chung Shun Knitting Centre, 1 - 3 Wing Yip Street, Kwai Chung, N.T., Hong Kong		
<i>E-mail</i>	: thomas.wong@eno.com.hk	<i>E-mail</i>	: Richard.Fung@alsglobal.com		
<i>Telephone</i>	: +852 22421020	<i>Telephone</i>	: +852 2610 1044		
<i>Facsimile</i>	: +852 27143612	<i>Facsimile</i>	: +852 2610 2021		
<i>Project</i>	: CONTRACT NO CV_2012_09 LIANTANG_HEUNG YUEN WAI BOUNDARY CONTROL POINT SITE FORMATION	<i>Quote number</i>	: ----	<i>Date received</i>	: 13-NOV-2013
<i>Order number</i>	: ----			<i>Date of issue</i>	: 18-NOV-2013
<i>C-O-C number</i>	: ----			<i>No. of samples</i>	- Received : 6
<i>Site</i>	: ----				- Analysed : 6

Report Comments

This report for ALS Technichem (HK) Pty Ltd work order reference HK1331449 supersedes any previous reports with this reference. The completion date of analysis is 14-NOV-2013. Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release. When date(s) and/or time(s) are shown bracketed, these have been assumed by the laboratory for process purposes. Abbreviations: CAS number = Chemical Abstract Services number. LOR = Limit of reporting.

Specific comments for Work Order HK1331449 : Project Name: Contract No. CV/2012/09 Liantang / Heung Yuen Wai Boundary Control Point Site Formation and Infrastructure Works - Contract 3 Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling - Stage 2.
Sample(s) were received in a chilled condition.
Water sample(s) analysed and reported on an as received basis.

This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.

This document has been electronically signed by those names that appear on this report and are the authorised signatories. Electronic signing has been carried out in compliance with procedures specified in the 'Electronic Transactions Ordinance' of Hong Kong, Chapter 553, Section 6.

<i>Signatory</i>	<i>Position</i>	<i>Authorised results for:-</i>
Fung Lim Chee, Richard	General Manager	Inorganics



Analytical Results

Sub-Matrix: WATER

			Compound				
			EA025: Suspended Solids (SS)				
			LOR Unit	2 mg/L			
Client sample ID	Client sampling date / time	Laboratory sample ID	EA/ED: Physical and Aggregate Properties				
C3A-1	[13-NOV-2013]	HK1331449-001	18				
C3A-2	[13-NOV-2013]	HK1331449-002	17				
C3B-1	[13-NOV-2013]	HK1331449-003	88				
C3B-2	[13-NOV-2013]	HK1331449-004	84				
I5-1	[13-NOV-2013]	HK1331449-005	20				
I5-2	[13-NOV-2013]	HK1331449-006	21				



Laboratory Duplicate (DUP) Report

Matrix: WATER				Laboratory Duplicate (DUP) Report				
Laboratory sample ID	Client sample ID	Method: Compound	CAS Number	LOR	Unit	Original Result	Duplicate Result	RPD (%)
EA/ED: Physical and Aggregate Properties (QC Lot: 3160048)								
HK1331403-001	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	8	8	0.0
HK1331439-005	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	34	35	2.9
EA/ED: Physical and Aggregate Properties (QC Lot: 3160049)								
HK1331449-005	I5-1	EA025: Suspended Solids (SS)	----	2	mg/L	20	20	0.0
HK1331506-009	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	28	29	0.0

Method Blank (MB), Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report

Matrix: WATER			Method Blank (MB) Report			Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report					
Method: Compound	CAS Number	LOR	Unit	Result	Spike Concentration	Spike Recovery (%)		Recovery Limits (%)		RPDs (%)	
						LCS	DCS	Low	High	Value	Control Limit
EA/ED: Physical and Aggregate Properties (QCLot: 3160048)											
EA025: Suspended Solids (SS)	----	2	mg/L	<2	10 mg/L	98.0	----	86	112	----	----
EA/ED: Physical and Aggregate Properties (QCLot: 3160049)											
EA025: Suspended Solids (SS)	----	2	mg/L	<2	10 mg/L	101	----	86	112	----	----

Matrix Spike (MS) and Matrix Spike Duplicate (MSD) Report

- No Matrix Spike (MS) or Matrix Spike Duplicate (MSD) Results are required to be reported.



CERTIFICATE OF ANALYSIS

<i>Client</i>	: ENOVATIVE ENVIRONMENTAL SERVICE LTD	<i>Laboratory</i>	: ALS Technichem HK Pty Ltd	<i>Page</i>	: 1 of 3
<i>Contact</i>	: MR THOMAS WONG	<i>Contact</i>	: Fung Lim Chee, Richard	<i>Work Order</i>	: HK1331666
<i>Address</i>	: RM 3704, SIK MAN HOUSE, HOMANTIN ESTATE, KOWLOON, HONG KONG	<i>Address</i>	: 11/F., Chung Shun Knitting Centre, 1 - 3 Wing Yip Street, Kwai Chung, N.T., Hong Kong		
<i>E-mail</i>	: thomas.wong@eno.com.hk	<i>E-mail</i>	: Richard.Fung@alsglobal.com		
<i>Telephone</i>	: +852 22421020	<i>Telephone</i>	: +852 2610 1044		
<i>Facsimile</i>	: +852 27143612	<i>Facsimile</i>	: +852 2610 2021		
<i>Project</i>	: CONTRACT NO CV_2012_09 LIANTANG_HEUNG YUEN WAI BOUNDARY CONTROL POINT SITE FORMATION	<i>Quote number</i>	: ----	<i>Date received</i>	: 15-NOV-2013
<i>Order number</i>	: ----			<i>Date of issue</i>	: 20-NOV-2013
<i>C-O-C number</i>	: ----			<i>No. of samples</i>	- Received : 6
<i>Site</i>	: ----				- Analysed : 6

Report Comments

This report for ALS Technichem (HK) Pty Ltd work order reference HK1331666 supersedes any previous reports with this reference. The completion date of analysis is 15-NOV-2013. Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release. When date(s) and/or time(s) are shown bracketed, these have been assumed by the laboratory for process purposes. Abbreviations: CAS number = Chemical Abstract Services number. LOR = Limit of reporting.

Specific comments for Work Order HK1331666 : Project Name: Contract No. CV/2012/09 Liantang / Heung Yuen Wai Boundary Control Point Site Formation and Infrastructure Works - Contract 3 Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling - Stage 2.
Sample(s) were received in a chilled condition.
Water sample(s) analysed and reported on an as received basis.

This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.

This document has been electronically signed by those names that appear on this report and are the authorised signatories. Electronic signing has been carried out in compliance with procedures specified in the 'Electronic Transactions Ordinance' of Hong Kong, Chapter 553, Section 6.

<i>Signatory</i>	<i>Position</i>	<i>Authorised results for:-</i>
Fung Lim Chee, Richard	General Manager	Inorganics



Analytical Results

Sub-Matrix: WATER

			Compound				
			EA025: Suspended Solids (SS)				
			LOR Unit	2 mg/L			
Client sample ID	Client sampling date / time	Laboratory sample ID	EA/ED: Physical and Aggregate Properties				
C3A-1	[15-NOV-2013]	HK1331666-001	25				
C3A-2	[15-NOV-2013]	HK1331666-002	26				
C3B-1	[15-NOV-2013]	HK1331666-003	30				
C3B-2	[15-NOV-2013]	HK1331666-004	38				
I5-1	[15-NOV-2013]	HK1331666-005	11				
I5-2	[15-NOV-2013]	HK1331666-006	8				



Laboratory Duplicate (DUP) Report

Matrix: WATER				Laboratory Duplicate (DUP) Report				
Laboratory sample ID	Client sample ID	Method: Compound	CAS Number	LOR	Unit	Original Result	Duplicate Result	RPD (%)
EA/ED: Physical and Aggregate Properties (QC Lot: 3162193)								
HK1331464-001	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	4	4	0.0
HK1331498-001	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	<2	<2	0.0
EA/ED: Physical and Aggregate Properties (QC Lot: 3162194)								
HK1331666-003	C3B-1	EA025: Suspended Solids (SS)	----	2	mg/L	30	31	0.0
HK1331667-007	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	17	17	0.0

Method Blank (MB), Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report

Matrix: WATER			Method Blank (MB) Report			Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report					
Method: Compound	CAS Number	LOR	Unit	Result	Spike Concentration	Spike Recovery (%)		Recovery Limits (%)		RPDs (%)	
						LCS	DCS	Low	High	Value	Control Limit
EA/ED: Physical and Aggregate Properties (QCLot: 3162193)											
EA025: Suspended Solids (SS)	----	2	mg/L	<2	10 mg/L	99.5	----	86	112	----	----
EA/ED: Physical and Aggregate Properties (QCLot: 3162194)											
EA025: Suspended Solids (SS)	----	2	mg/L	<2	10 mg/L	102	----	86	112	----	----

Matrix Spike (MS) and Matrix Spike Duplicate (MSD) Report

- No Matrix Spike (MS) or Matrix Spike Duplicate (MSD) Results are required to be reported.



CERTIFICATE OF ANALYSIS

<i>Client</i>	: ENOVATIVE ENVIRONMENTAL SERVICE LTD	<i>Laboratory</i>	: ALS Technichem HK Pty Ltd	<i>Page</i>	: 1 of 3
<i>Contact</i>	: MR THOMAS WONG	<i>Contact</i>	: Fung Lim Chee, Richard	<i>Work Order</i>	: HK1331998
<i>Address</i>	: RM 3704, SIK MAN HOUSE, HOMANTIN ESTATE, KOWLOON, HONG KONG	<i>Address</i>	: 11/F., Chung Shun Knitting Centre, 1 - 3 Wing Yip Street, Kwai Chung, N.T., Hong Kong		
<i>E-mail</i>	: thomas.wong@eno.com.hk	<i>E-mail</i>	: Richard.Fung@alsglobal.com		
<i>Telephone</i>	: +852 22421020	<i>Telephone</i>	: +852 2610 1044		
<i>Facsimile</i>	: +852 27143612	<i>Facsimile</i>	: +852 2610 2021		
<i>Project</i>	: CONTRACT NO CV_2012_09 LIANTANG_HEUNG YUEN WAI BOUNDARY CONTROL POINT SITE FORMATION	<i>Quote number</i>	: ----	<i>Date received</i>	: 19-NOV-2013
<i>Order number</i>	: ----			<i>Date of issue</i>	: 22-NOV-2013
<i>C-O-C number</i>	: ----			<i>No. of samples</i>	- Received : 6
<i>Site</i>	: ----				- Analysed : 6

Report Comments

This report for ALS Technichem (HK) Pty Ltd work order reference HK1331998 supersedes any previous reports with this reference. The completion date of analysis is 19-NOV-2013. Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release. When date(s) and/or time(s) are shown bracketed, these have been assumed by the laboratory for process purposes. Abbreviations: CAS number = Chemical Abstract Services number. LOR = Limit of reporting.

Specific comments for Work Order HK1331998 : Project Name: Contract No. CV/2012/09 Liantang / Heung Yuen Wai Boundary Control Point Site Formation and Infrastructure Works - Contract 3 Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling - Stage 2.
Sample(s) were received in a chilled condition.
Water sample(s) analysed and reported on an as received basis.

This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.

This document has been electronically signed by those names that appear on this report and are the authorised signatories. Electronic signing has been carried out in compliance with procedures specified in the 'Electronic Transactions Ordinance' of Hong Kong, Chapter 553, Section 6.

<i>Signatory</i>	<i>Position</i>	<i>Authorised results for:-</i>
Fung Lim Chee, Richard	General Manager	Inorganics



Analytical Results

Sub-Matrix: WATER

			Compound				
			EA025: Suspended Solids (SS)				
			LOR Unit	2 mg/L			
Client sample ID	Client sampling date / time	Laboratory sample ID	EA/ED: Physical and Aggregate Properties				
C3A-1	[18-NOV-2013]	HK1331998-001	10				
C3A-2	[18-NOV-2013]	HK1331998-002	9				
C3B-1	[18-NOV-2013]	HK1331998-003	32				
C3B-2	[18-NOV-2013]	HK1331998-004	32				
I5-1	[18-NOV-2013]	HK1331998-005	18				
I5-2	[18-NOV-2013]	HK1331998-006	18				



Laboratory Duplicate (DUP) Report

Matrix: WATER

				Laboratory Duplicate (DUP) Report				
Laboratory sample ID	Client sample ID	Method: Compound	CAS Number	LOR	Unit	Original Result	Duplicate Result	RPD (%)
EA/ED: Physical and Aggregate Properties (QC Lot: 3167202)								
HK1331924-003	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	<2	<2	0.0
HK1331928-001	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	187	194	3.7

Method Blank (MB), Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report

Matrix: WATER

			Method Blank (MB) Report			Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report					
Method: Compound	CAS Number	LOR	Unit	Result	Spike Concentration	Spike Recovery (%)		Recovery Limits (%)		RPDs (%)	
						LCS	DCS	Low	High	Value	Control Limit
EA/ED: Physical and Aggregate Properties (QCLot: 3167202)											
EA025: Suspended Solids (SS)	----	2	mg/L	<2	10 mg/L	102	----	86	112	----	----

Matrix Spike (MS) and Matrix Spike Duplicate (MSD) Report

- No Matrix Spike (MS) or Matrix Spike Duplicate (MSD) Results are required to be reported.



CERTIFICATE OF ANALYSIS

<i>Client</i>	: ENOVATIVE ENVIRONMENTAL SERVICE LTD	<i>Laboratory</i>	: ALS Technichem HK Pty Ltd	<i>Page</i>	: 1 of 3
<i>Contact</i>	: MR THOMAS WONG	<i>Contact</i>	: Fung Lim Chee, Richard	<i>Work Order</i>	: HK1332192
<i>Address</i>	: RM 3704, SIK MAN HOUSE, HOMANTIN ESTATE, KOWLOON, HONG KONG	<i>Address</i>	: 11/F., Chung Shun Knitting Centre, 1 - 3 Wing Yip Street, Kwai Chung, N.T., Hong Kong		
<i>E-mail</i>	: thomas.wong@eno.com.hk	<i>E-mail</i>	: Richard.Fung@alsglobal.com		
<i>Telephone</i>	: +852 22421020	<i>Telephone</i>	: +852 2610 1044		
<i>Facsimile</i>	: +852 27143612	<i>Facsimile</i>	: +852 2610 2021		
<i>Project</i>	: CONTRACT NO CV_2012_09 LIANTANG_HEUNG YUEN WAI BOUNDARY CONTROL POINT SITE FORMATION	<i>Quote number</i>	: ----	<i>Date received</i>	: 20-NOV-2013
<i>Order number</i>	: ----			<i>Date of issue</i>	: 25-NOV-2013
<i>C-O-C number</i>	: ----			<i>No. of samples</i>	- Received : 6
<i>Site</i>	: ----				- Analysed : 6

Report Comments

This report for ALS Technichem (HK) Pty Ltd work order reference HK1332192 supersedes any previous reports with this reference. The completion date of analysis is 21-NOV-2013. Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release. When date(s) and/or time(s) are shown bracketed, these have been assumed by the laboratory for process purposes. Abbreviations: CAS number = Chemical Abstract Services number. LOR = Limit of reporting.

Specific comments for Work Order HK1332192 : Project Name: Contract No. CV/2012/09 Liantang / Heung Yuen Wai Boundary Control Point Site Formation and Infrastructure Works - Contract 3 Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling - Stage 2.
Sample(s) were received in a chilled condition.
Water sample(s) analysed and reported on an as received basis.

This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.

This document has been electronically signed by those names that appear on this report and are the authorised signatories. Electronic signing has been carried out in compliance with procedures specified in the 'Electronic Transactions Ordinance' of Hong Kong, Chapter 553, Section 6.

<i>Signatory</i>	<i>Position</i>	<i>Authorised results for:-</i>
Fung Lim Chee, Richard	General Manager	Inorganics



Analytical Results

Sub-Matrix: WATER

			Compound				
			EA025: Suspended Solids (SS)				
			LOR Unit	2 mg/L			
Client sample ID	Client sampling date / time	Laboratory sample ID	EA/ED: Physical and Aggregate Properties				
C3A-1	[20-NOV-2013]	HK1332192-001	10				
C3A-2	[20-NOV-2013]	HK1332192-002	8				
C3B-1	[20-NOV-2013]	HK1332192-003	8				
C3B-2	[20-NOV-2013]	HK1332192-004	10				
I5-1	[20-NOV-2013]	HK1332192-005	6				
I5-2	[20-NOV-2013]	HK1332192-006	8				



Laboratory Duplicate (DUP) Report

Matrix: WATER				Laboratory Duplicate (DUP) Report				
Laboratory sample ID	Client sample ID	Method: Compound	CAS Number	LOR	Unit	Original Result	Duplicate Result	RPD (%)
EA/ED: Physical and Aggregate Properties (QC Lot: 3172697)								
HK1332084-008	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	9	9	0.0
HK1332188-005	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	14	15	0.0

Method Blank (MB), Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report

Matrix: WATER			Method Blank (MB) Report			Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report					
Method: Compound	CAS Number	LOR	Unit	Result	Spike Concentration	Spike Recovery (%)		Recovery Limits (%)		RPDs (%)	
						LCS	DCS	Low	High	Value	Control Limit
EA/ED: Physical and Aggregate Properties (QCLot: 3172697)											
EA025: Suspended Solids (SS)	----	2	mg/L	<2	10 mg/L	98.0	----	86	112	----	----

Matrix Spike (MS) and Matrix Spike Duplicate (MSD) Report

- No Matrix Spike (MS) or Matrix Spike Duplicate (MSD) Results are required to be reported.



CERTIFICATE OF ANALYSIS

<i>Client</i>	: ENOVATIVE ENVIRONMENTAL SERVICE LTD	<i>Laboratory</i>	: ALS Technichem HK Pty Ltd	<i>Page</i>	: 1 of 3
<i>Contact</i>	: MR THOMAS WONG	<i>Contact</i>	: Fung Lim Chee, Richard	<i>Work Order</i>	: HK1332423
<i>Address</i>	: RM 3704, SIK MAN HOUSE, HOMANTIN ESTATE, KOWLOON, HONG KONG	<i>Address</i>	: 11/F., Chung Shun Knitting Centre, 1 - 3 Wing Yip Street, Kwai Chung, N.T., Hong Kong		
<i>E-mail</i>	: thomas.wong@eno.com.hk	<i>E-mail</i>	: Richard.Fung@alsglobal.com		
<i>Telephone</i>	: +852 22421020	<i>Telephone</i>	: +852 2610 1044		
<i>Facsimile</i>	: +852 27143612	<i>Facsimile</i>	: +852 2610 2021		
<i>Project</i>	: CONTRACT NO CV_2012_09 LIANTANG_HEUNG YUEN WAI BOUNDARY CONTROL POINT SITE FORMATION	<i>Quote number</i>	: ----	<i>Date received</i>	: 22-NOV-2013
<i>Order number</i>	: ----			<i>Date of issue</i>	: 27-NOV-2013
<i>C-O-C number</i>	: ----			<i>No. of samples</i>	- Received : 6
<i>Site</i>	: ----				- Analysed : 6

Report Comments

This report for ALS Technichem (HK) Pty Ltd work order reference HK1332423 supersedes any previous reports with this reference. The completion date of analysis is 25-NOV-2013. Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release. When date(s) and/or time(s) are shown bracketed, these have been assumed by the laboratory for process purposes. Abbreviations: CAS number = Chemical Abstract Services number. LOR = Limit of reporting.

Specific comments for Work Order HK1332423 : Project Name: Contract No. CV/2012/09 Liantang / Heung Yuen Wai Boundary Control Point Site Formation and Infrastructure Works - Contract 3 Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling - Stage 2.
Sample(s) were received in a chilled condition.
Water sample(s) analysed and reported on an as received basis.

This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.

This document has been electronically signed by those names that appear on this report and are the authorised signatories. Electronic signing has been carried out in compliance with procedures specified in the 'Electronic Transactions Ordinance' of Hong Kong, Chapter 553, Section 6.

<i>Signatory</i>	<i>Position</i>	<i>Authorised results for:-</i>
Fung Lim Chee, Richard	General Manager	Inorganics



Analytical Results

Sub-Matrix: WATER

			Compound				
			EA025: Suspended Solids (SS)				
			LOR Unit				
Client sample ID	Client sampling date / time	Laboratory sample ID	EA/ED: Physical and Aggregate Properties				
C3A-1	[22-NOV-2013]	HK1332423-001	6				
C3A-2	[22-NOV-2013]	HK1332423-002	4				
C3B-1	[22-NOV-2013]	HK1332423-003	35				
C3B-2	[22-NOV-2013]	HK1332423-004	35				
I5-1	[22-NOV-2013]	HK1332423-005	9				
I5-2	[22-NOV-2013]	HK1332423-006	8				



Laboratory Duplicate (DUP) Report

Matrix: WATER

				Laboratory Duplicate (DUP) Report				
Laboratory sample ID	Client sample ID	Method: Compound	CAS Number	LOR	Unit	Original Result	Duplicate Result	RPD (%)
EA/ED: Physical and Aggregate Properties (QC Lot: 3176420)								
HK1332159-003	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	<2	<2	0.0
HK1332370-001	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	<2	<2	0.0

Method Blank (MB), Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report

Matrix: WATER

			Method Blank (MB) Report			Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report					
Method: Compound	CAS Number	LOR	Unit	Result	Spike Concentration	Spike Recovery (%)		Recovery Limits (%)		RPDs (%)	
						LCS	DCS	Low	High	Value	Control Limit
EA/ED: Physical and Aggregate Properties (QCLot: 3176420)											
EA025: Suspended Solids (SS)	----	2	mg/L	<2	10 mg/L	98.5	----	86	112	----	----

Matrix Spike (MS) and Matrix Spike Duplicate (MSD) Report

- No Matrix Spike (MS) or Matrix Spike Duplicate (MSD) Results are required to be reported.



CERTIFICATE OF ANALYSIS

<i>Client</i>	: ENOVATIVE ENVIRONMENTAL SERVICE LTD	<i>Laboratory</i>	: ALS Technichem HK Pty Ltd	<i>Page</i>	: 1 of 3
<i>Contact</i>	: MR THOMAS WONG	<i>Contact</i>	: Fung Lim Chee, Richard	<i>Work Order</i>	: HK1332529
<i>Address</i>	: RM 3704, SIK MAN HOUSE, HOMANTIN ESTATE, KOWLOON, HONG KONG	<i>Address</i>	: 11/F., Chung Shun Knitting Centre, 1 - 3 Wing Yip Street, Kwai Chung, N.T., Hong Kong		
<i>E-mail</i>	: thomas.wong@eno.com.hk	<i>E-mail</i>	: Richard.Fung@alsglobal.com		
<i>Telephone</i>	: +852 22421020	<i>Telephone</i>	: +852 2610 1044		
<i>Facsimile</i>	: +852 27143612	<i>Facsimile</i>	: +852 2610 2021		
<i>Project</i>	: CONTRACT NO CV_2012_09 LIANTANG_HEUNG YUEN WAI BOUNDARY CONTROL POINT SITE FORMATION	<i>Quote number</i>	: ----	<i>Date received</i>	: 25-NOV-2013
<i>Order number</i>	: ----			<i>Date of issue</i>	: 28-NOV-2013
<i>C-O-C number</i>	: ----			<i>No. of samples</i>	- Received : 6
<i>Site</i>	: ----				- Analysed : 6

Report Comments

This report for ALS Technichem (HK) Pty Ltd work order reference HK1332529 supersedes any previous reports with this reference. The completion date of analysis is 25-NOV-2013. Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release. When date(s) and/or time(s) are shown bracketed, these have been assumed by the laboratory for process purposes. Abbreviations: CAS number = Chemical Abstract Services number. LOR = Limit of reporting.

Specific comments for Work Order HK1332529 : Project Name: Contract No. CV/2012/09 Liantang / Heung Yuen Wai Boundary Control Point Site Formation and Infrastructure Works - Contract 3 Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling - Stage 2.
Sample(s) were received in a chilled condition.
Water sample(s) analysed and reported on an as received basis.

This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.

This document has been electronically signed by those names that appear on this report and are the authorised signatories. Electronic signing has been carried out in compliance with procedures specified in the 'Electronic Transactions Ordinance' of Hong Kong, Chapter 553, Section 6.

<i>Signatory</i>	<i>Position</i>	<i>Authorised results for:-</i>
Fung Lim Chee, Richard	General Manager	Inorganics



Analytical Results

Sub-Matrix: WATER

			Compound				
			EA025: Suspended Solids (SS)				
			LOR Unit				
Client sample ID	Client sampling date / time	Laboratory sample ID	EA/ED: Physical and Aggregate Properties				
C3A-1	[25-NOV-2013]	HK1332529-001	9				
C3A-2	[25-NOV-2013]	HK1332529-002	10				
C3B-1	[25-NOV-2013]	HK1332529-003	22				
C3B-2	[25-NOV-2013]	HK1332529-004	23				
I5-1	[25-NOV-2013]	HK1332529-005	18				
I5-2	[25-NOV-2013]	HK1332529-006	19				



Laboratory Duplicate (DUP) Report

Matrix: WATER

				Laboratory Duplicate (DUP) Report				
Laboratory sample ID	Client sample ID	Method: Compound	CAS Number	LOR	Unit	Original Result	Duplicate Result	RPD (%)
EA/ED: Physical and Aggregate Properties (QC Lot: 3178014)								
HK1332445-002	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	7	8	0.0
HK1332528-005	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	14	14	0.0

Method Blank (MB), Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report

Matrix: WATER

			Method Blank (MB) Report			Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report					
Method: Compound	CAS Number	LOR	Unit	Result	Spike Concentration	Spike Recovery (%)		Recovery Limits (%)		RPDs (%)	
						LCS	DCS	Low	High	Value	Control Limit
EA/ED: Physical and Aggregate Properties (QCLot: 3178014)											
EA025: Suspended Solids (SS)	----	2	mg/L	<2	10 mg/L	98.0	----	86	112	----	----

Matrix Spike (MS) and Matrix Spike Duplicate (MSD) Report

- No Matrix Spike (MS) or Matrix Spike Duplicate (MSD) Results are required to be reported.



CERTIFICATE OF ANALYSIS

<i>Client</i>	: ENOVATIVE ENVIRONMENTAL SERVICE LTD	<i>Laboratory</i>	: ALS Technichem HK Pty Ltd	<i>Page</i>	: 1 of 3
<i>Contact</i>	: MR THOMAS WONG	<i>Contact</i>	: Fung Lim Chee, Richard	<i>Work Order</i>	: HK1332812
<i>Address</i>	: RM 3704, SIK MAN HOUSE, HOMANTIN ESTATE, KOWLOON, HONG KONG	<i>Address</i>	: 11/F., Chung Shun Knitting Centre, 1 - 3 Wing Yip Street, Kwai Chung, N.T., Hong Kong		
<i>E-mail</i>	: thomas.wong@eno.com.hk	<i>E-mail</i>	: Richard.Fung@alsglobal.com		
<i>Telephone</i>	: +852 22421020	<i>Telephone</i>	: +852 2610 1044		
<i>Facsimile</i>	: +852 27143612	<i>Facsimile</i>	: +852 2610 2021		
<i>Project</i>	: CONTRACT NO CV_2012_09 LIANTANG_HEUNG YUEN WAI BOUNDARY CONTROL POINT SITE FORMATION	<i>Quote number</i>	: ----	<i>Date received</i>	: 27-NOV-2013
<i>Order number</i>	: ----			<i>Date of issue</i>	: 02-DEC-2013
<i>C-O-C number</i>	: ----			<i>No. of samples</i>	- Received : 6
<i>Site</i>	: ----				- Analysed : 6

Report Comments

This report for ALS Technichem (HK) Pty Ltd work order reference HK1332812 supersedes any previous reports with this reference. The completion date of analysis is 28-NOV-2013. Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release. When date(s) and/or time(s) are shown bracketed, these have been assumed by the laboratory for process purposes. Abbreviations: CAS number = Chemical Abstract Services number. LOR = Limit of reporting.

Specific comments for Work Order HK1332812 : Project Name: Contract No. CV/2012/09 Liantang / Heung Yuen Wai Boundary Control Point Site Formation and Infrastructure Works - Contract 3 Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling - Stage 2.
Sample(s) were received in a chilled condition.
Water sample(s) analysed and reported on an as received basis.

This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.

This document has been electronically signed by those names that appear on this report and are the authorised signatories. Electronic signing has been carried out in compliance with procedures specified in the 'Electronic Transactions Ordinance' of Hong Kong, Chapter 553, Section 6.

<i>Signatory</i>	<i>Position</i>	<i>Authorised results for:-</i>
Fung Lim Chee, Richard	General Manager	Inorganics



Analytical Results

Sub-Matrix: WATER

			Compound				
			EA025: Suspended Solids (SS)				
			LOR Unit				
Client sample ID	Client sampling date / time	Laboratory sample ID	EA/ED: Physical and Aggregate Properties				
C3A-1	[27-NOV-2013]	HK1332812-001	10				
C3A-2	[27-NOV-2013]	HK1332812-002	12				
C3B-1	[27-NOV-2013]	HK1332812-003	14				
C3B-2	[27-NOV-2013]	HK1332812-004	14				
I5-1	[27-NOV-2013]	HK1332812-005	8				
I5-2	[27-NOV-2013]	HK1332812-006	10				



Laboratory Duplicate (DUP) Report

Matrix: WATER

				Laboratory Duplicate (DUP) Report				
Laboratory sample ID	Client sample ID	Method: Compound	CAS Number	LOR	Unit	Original Result	Duplicate Result	RPD (%)
EA/ED: Physical and Aggregate Properties (QC Lot: 3184956)								
HK1329960-008	Anonymous	EA025: Suspended Solids (SS)	----	1	mg/L	47	48	2.7
HK1332806-006	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	20	21	0.0

Method Blank (MB), Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report

Matrix: WATER

			Method Blank (MB) Report			Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report					
Method: Compound	CAS Number	LOR	Unit	Result	Spike Concentration	Spike Recovery (%)		Recovery Limits (%)		RPDs (%)	
						LCS	DCS	Low	High	Value	Control Limit
EA/ED: Physical and Aggregate Properties (QCLot: 3184956)											
EA025: Suspended Solids (SS)	----	2	mg/L	<2	10 mg/L	99.5	----	86	112	----	----

Matrix Spike (MS) and Matrix Spike Duplicate (MSD) Report

- No Matrix Spike (MS) or Matrix Spike Duplicate (MSD) Results are required to be reported.



CERTIFICATE OF ANALYSIS

<i>Client</i>	: ENOVATIVE ENVIRONMENTAL SERVICE LTD	<i>Laboratory</i>	: ALS Technichem HK Pty Ltd	<i>Page</i>	: 1 of 3
<i>Contact</i>	: MR THOMAS WONG	<i>Contact</i>	: Fung Lim Chee, Richard	<i>Work Order</i>	: HK1333246
<i>Address</i>	: RM 3704, SIK MAN HOUSE, HOMANTIN ESTATE, KOWLOON, HONG KONG	<i>Address</i>	: 11/F., Chung Shun Knitting Centre, 1 - 3 Wing Yip Street, Kwai Chung, N.T., Hong Kong		
<i>E-mail</i>	: thomas.wong@eno.com.hk	<i>E-mail</i>	: Richard.Fung@alsglobal.com		
<i>Telephone</i>	: +852 22421020	<i>Telephone</i>	: +852 2610 1044		
<i>Facsimile</i>	: +852 27143612	<i>Facsimile</i>	: +852 2610 2021		
<i>Project</i>	: CONTRACT NO CV_2012_09 LIANTANG_HEUNG YUEN WAI BOUNDARY CONTROL POINT SITE FORMATION	<i>Quote number</i>	: ----	<i>Date received</i>	: 02-DEC-2013
<i>Order number</i>	: ----			<i>Date of issue</i>	: 04-DEC-2013
<i>C-O-C number</i>	: ----			<i>No. of samples</i>	- Received : 6
<i>Site</i>	: ----				- Analysed : 6

Report Comments

This report for ALS Technichem (HK) Pty Ltd work order reference HK1333246 supersedes any previous reports with this reference. The completion date of analysis is 03-DEC-2013. Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release. When date(s) and/or time(s) are shown bracketed, these have been assumed by the laboratory for process purposes. Abbreviations: CAS number = Chemical Abstract Services number. LOR = Limit of reporting.

Specific comments for Work Order HK1333246 : Project Name: Contract No. CV/2012/09 Liantang / Heung Yuen Wai Boundary Control Point Site Formation and Infrastructure Works - Contract 3 Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling - Stage 2.
Sample(s) were received in a chilled condition.
Water sample(s) analysed and reported on an as received basis.

This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.

This document has been electronically signed by those names that appear on this report and are the authorised signatories. Electronic signing has been carried out in compliance with procedures specified in the 'Electronic Transactions Ordinance' of Hong Kong, Chapter 553, Section 6.

<i>Signatory</i>	<i>Position</i>	<i>Authorised results for:-</i>
Fung Lim Chee, Richard	General Manager	Inorganics



Analytical Results

Sub-Matrix: WATER

			Compound				
			EA025: Suspended Solids (SS)				
			LOR Unit	2 mg/L			
Client sample ID	Client sampling date / time	Laboratory sample ID	EA/ED: Physical and Aggregate Properties				
C3A-1	[02-DEC-2013]	HK1333246-001	16				
C3A-2	[02-DEC-2013]	HK1333246-002	43				
C3B-1	[02-DEC-2013]	HK1333246-003	11				
C3B-2	[02-DEC-2013]	HK1333246-004	11				
I5-1	[02-DEC-2013]	HK1333246-005	14				
I5-2	[02-DEC-2013]	HK1333246-006	13				



Laboratory Duplicate (DUP) Report

Matrix: WATER

				Laboratory Duplicate (DUP) Report				
Laboratory sample ID	Client sample ID	Method: Compound	CAS Number	LOR	Unit	Original Result	Duplicate Result	RPD (%)
EA/ED: Physical and Aggregate Properties (QC Lot: 3190530)								
HK1333071-005	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	15	16	0.0
HK1333122-001	Anonymous	EA025: Suspended Solids (SS)	----	2	mg/L	<2	<2	0.0

Method Blank (MB), Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report

Matrix: WATER

			Method Blank (MB) Report			Laboratory Control Spike (LCS) and Laboratory Control Spike Duplicate (DCS) Report					
Method: Compound	CAS Number	LOR	Unit	Result	Spike Concentration	Spike Recovery (%)		Recovery Limits (%)		RPDs (%)	
						LCS	DCS	Low	High	Value	Control Limit
EA/ED: Physical and Aggregate Properties (QCLot: 3190530)											
EA025: Suspended Solids (SS)	----	2	mg/L	<2	10 mg/L	98.5	----	86	112	----	----

Matrix Spike (MS) and Matrix Spike Duplicate (MSD) Report

- No Matrix Spike (MS) or Matrix Spike Duplicate (MSD) Results are required to be reported.

Appendix I

Water Quality Monitoring Results and their Graphical Presentation

Project Name: **Contract No. CV/2012/09 Liantang / Heung Yuen Wai Boundary Control Point Site Formation and Infrastructure works - Contract 3**
Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling - Stage 2

Date of Monitoring: 11/22/2013 Weather: Fine

Monitoring Location	Time	Water Depth (m)	Temperature (°C)		pH		DO (mg/L)		DO (% saturation)		Turbidity (NTU)		Salinity (g/L)		SS (mg/L)	
			Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
C3a	14:38	<0.5	25.5	25.5	7.7	7.7	7.4	7.7	90.6	94.0	12.2	12.2	<0.1	<0.1	6	5
			25.5		7.7		8.0		97.3		12.1		<0.1		4	
			23.8		8.0		8.1		95.7		60.3		<0.1		35	
C3b	14:21	<0.5	23.8	23.8	8.0	8.0	8.1	8.1	95.8	95.8	59.7	59.7	<0.1	<0.1	35	35
			23.8		8.0		8.1		95.8		59.0		<0.1		35	
			24.6		7.7		8.7		104.5		6.2		<0.1		9	
I5	14:07	<0.5	24.6	24.6	7.7	7.7	8.7	8.7	104.3	104.4	6.3	6.3	<0.1	<0.1	9	8.5
			24.6		7.7		8.7		104.3		6.3		<0.1		8	

Date of Monitoring: 11/25/2013 Weather: Sunny

Monitoring Location	Time	Water Depth (m)	Temperature (°C)		pH		DO (mg/L)		DO (% saturation)		Turbidity (NTU)		Salinity (g/L)		SS (mg/L)	
			Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
C3a	11:32	<0.5	23.2	23.2	7.4	7.4	8.1	8.1	95.1	95.1	25.9	27.4	<0.1	<0.1	9	9.5
			23.2		7.4		8.1		95.1		28.8		<0.1		10	
			22.1		8.3		8.4		95.8		15.5		<0.1		22	
C3b	11:19	<0.5	22.1	22.1	8.3	8.3	8.3	8.3	95.7	95.7	15.5	15.0	<0.1	<0.1	22	22.5
			22.1		8.3		8.3		95.5		14.4		<0.1		23	
			21.7		7.5		8.7		99.0		24.0		<0.1		18	
I5	10:58	<0.5	21.7	21.7	7.5	7.5	8.7	8.7	98.8	98.8	24.3	24.3	<0.1	<0.1	18	18.5
			21.7		7.5		8.7		98.6		24.5		<0.1		19	




Date of Monitoring: 11/27/2013 Weather: Fine

Monitoring Location	Time	Water Depth (m)	Temperature (°C)		pH		DO (mg/L)		DO (% saturation)		Turbidity (NTU)		Salinity (g/L)		SS (mg/L)	
			Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
C3a	10:11	<0.5	23.4	23.4	7.8	7.8	8.1	8.1	95.3	95.3	22.1	21.9	<0.1	<0.1	10	11
			23.4		7.8		8.1		95.3		21.6		<0.1		12	
			22.7		8.0		8.3		95.5		24.3		<0.1		14	
C3b	10:26	<0.5	22.7	22.7	8.0	8.0	8.3	8.3	95.5	95.5	24.3	24.0	<0.1	<0.1	14	14
			22.7		8.0		8.3		95.5		23.7		<0.1		14	
			23.2		7.7		8.7		98.7		20.5		<0.1		8	
I5	10:45	<0.5	23.2	23.2	7.7	7.7	8.7	8.7	98.6	98.7	19.7	20.1	<0.1	<0.1	10	9
			23.2		7.7		8.7		98.6		19.7		<0.1		10	




Date of Monitoring: 11/29/2013 Weather: Fine

Monitoring Location	Time	Water Depth (m)	Temperature (°C)		pH		DO (mg/L)		DO (% saturation)		Turbidity (NTU)		Salinity (g/L)		SS (mg/L)	
			Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
C3a	14:24	<0.5	21.5	21.5	7.8	7.8	8.9	8.9	100.3	100.4	12.1	12.1	<0.1	<0.1	6	5
			21.5		7.8		8.9		100.4		12.0		<0.1		4	
			20.3		8.0		8.2		90.9		27.5		<0.1		15	
C3b	14:05	<0.5	20.3	20.3	8.0	8.0	8.2	8.2	91.1	91.0	28.5	28.0	<0.1	<0.1	10	12.5
			20.3		8.0		8.2		91.1		28.5		<0.1		10	
			21.4		7.6		9.5		107.7		15.8		<0.1		15	
I5	13:48	<0.5	21.4	21.4	7.6	7.6	9.4	9.5	106.3	107.0	15.9	15.9	<0.1	<0.1	10	12.5
			21.4		7.6		9.4		106.3		15.9		<0.1		10	




Dissolved Oxygen

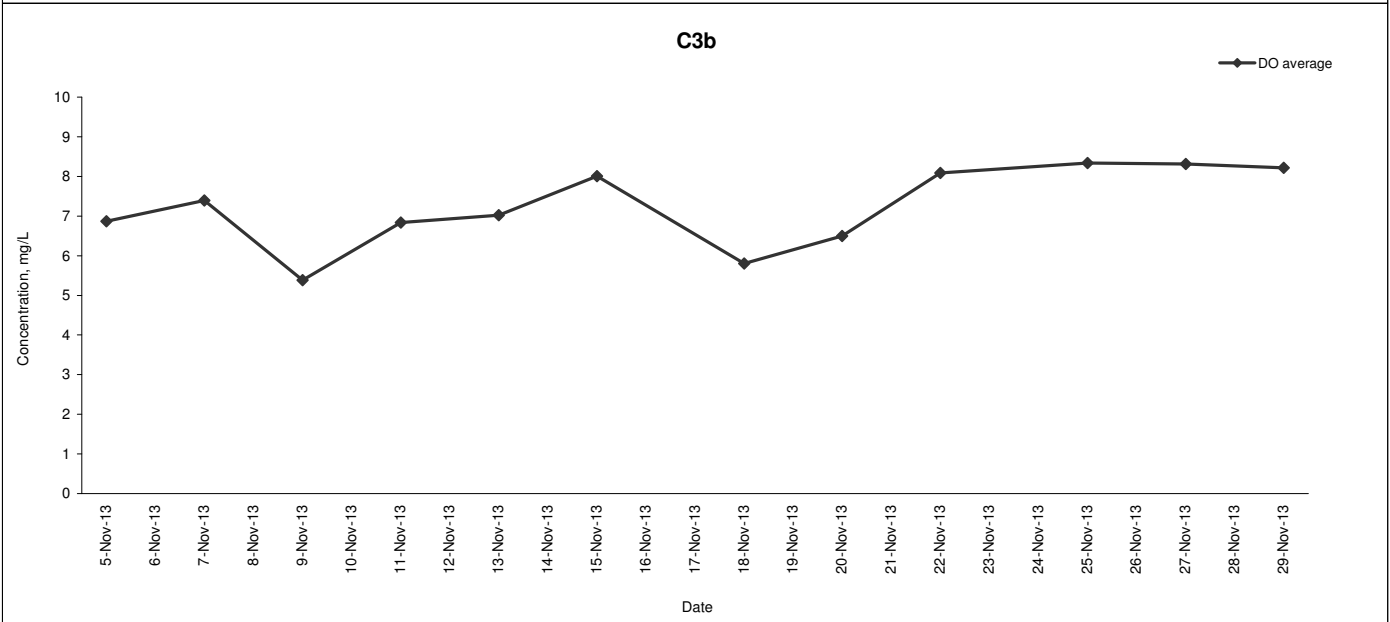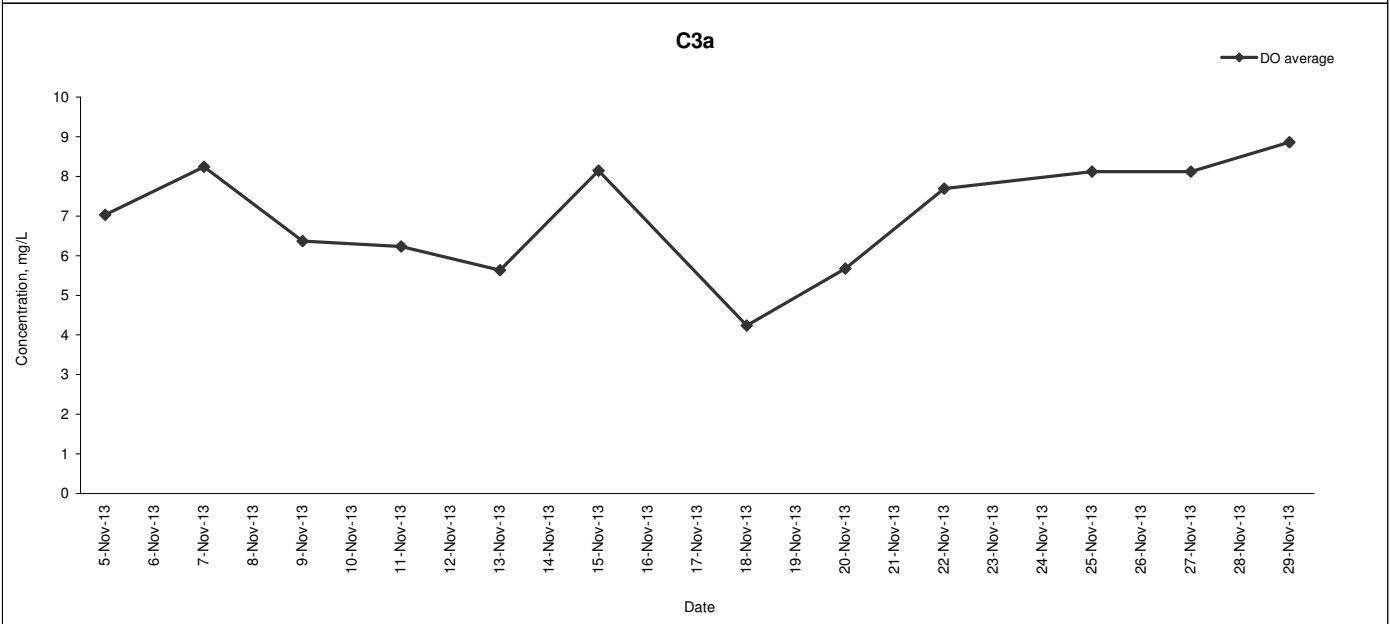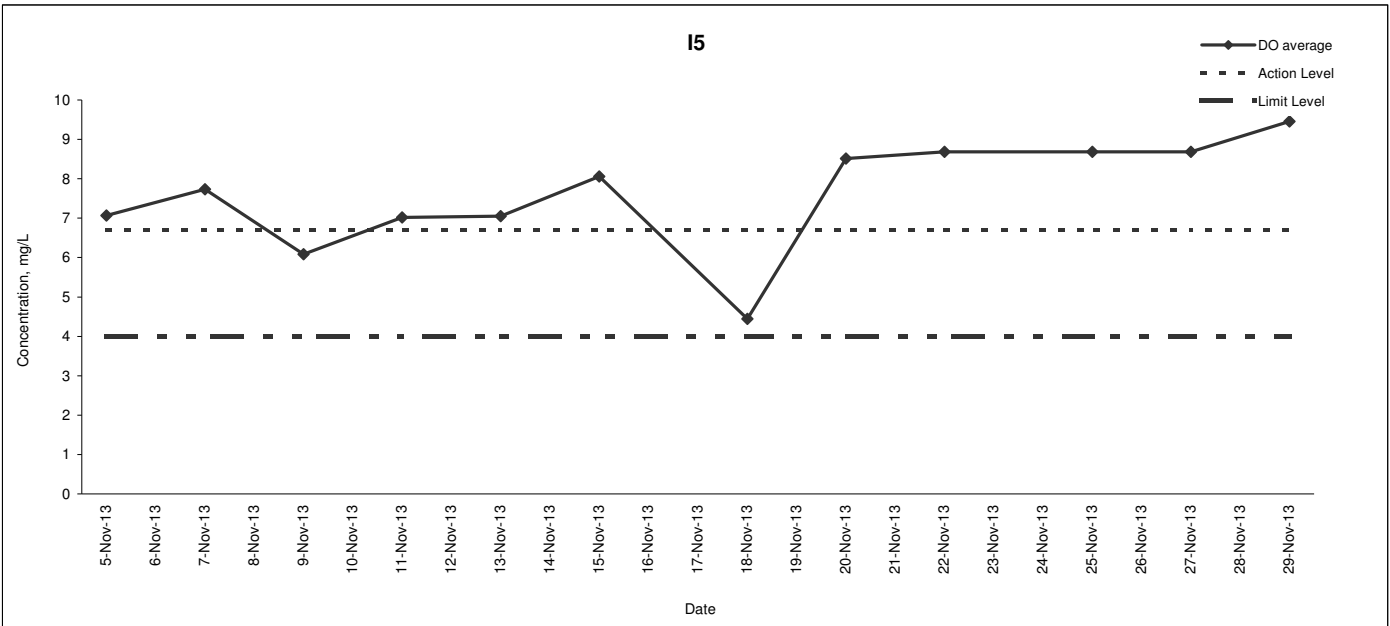

Turbidity

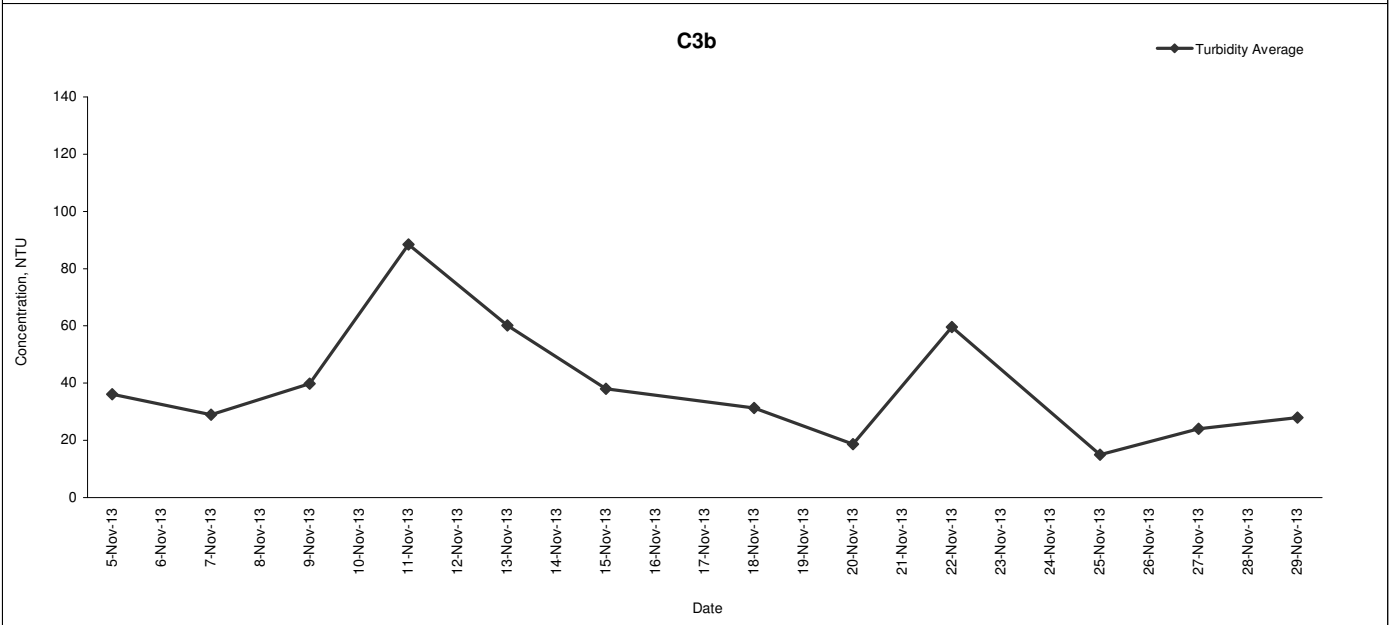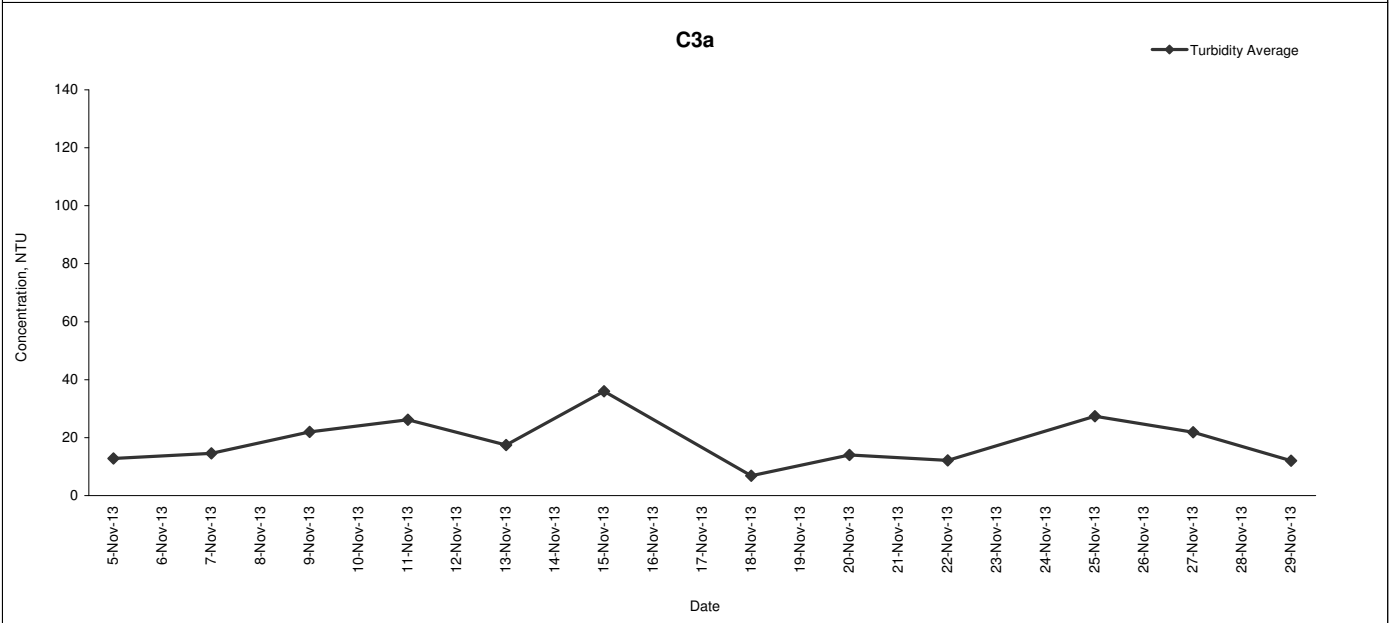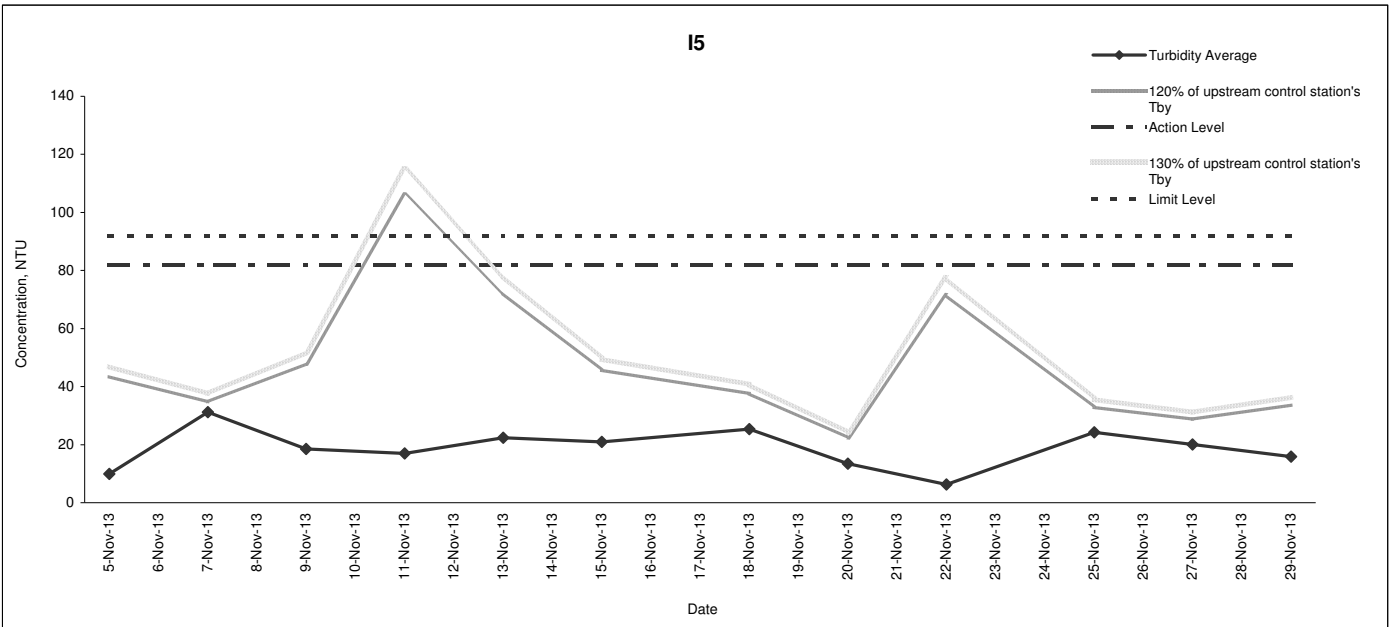

Suspended Solid

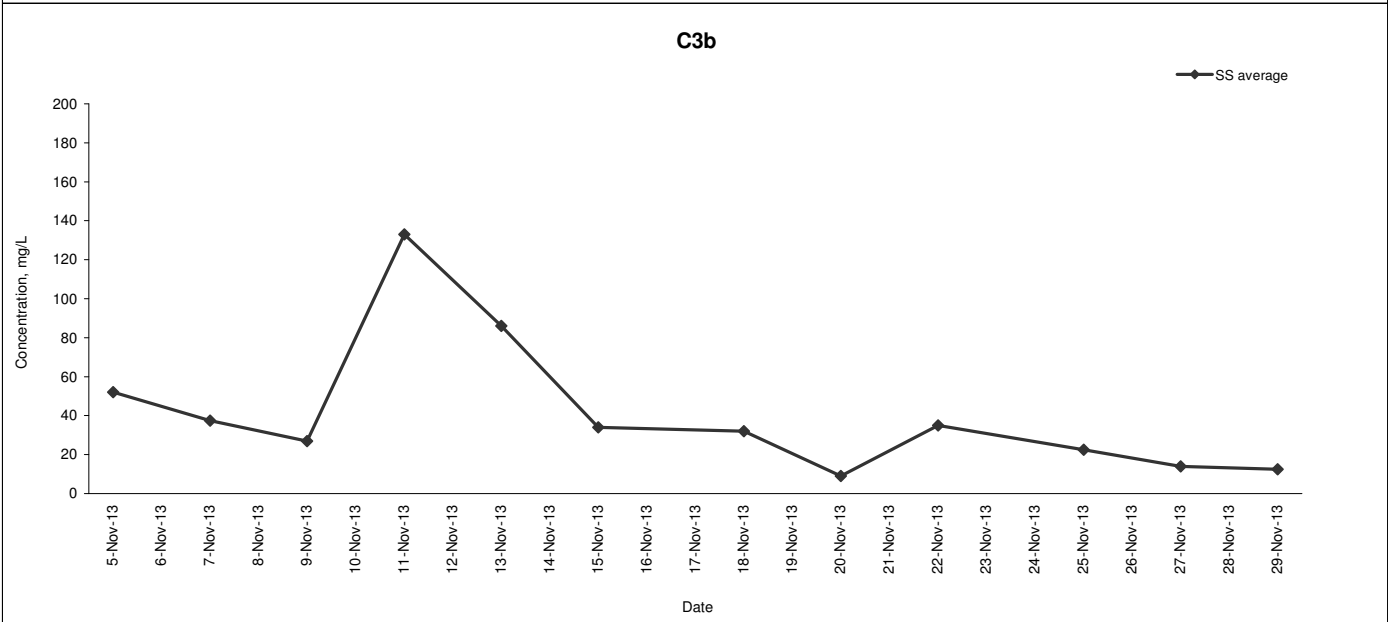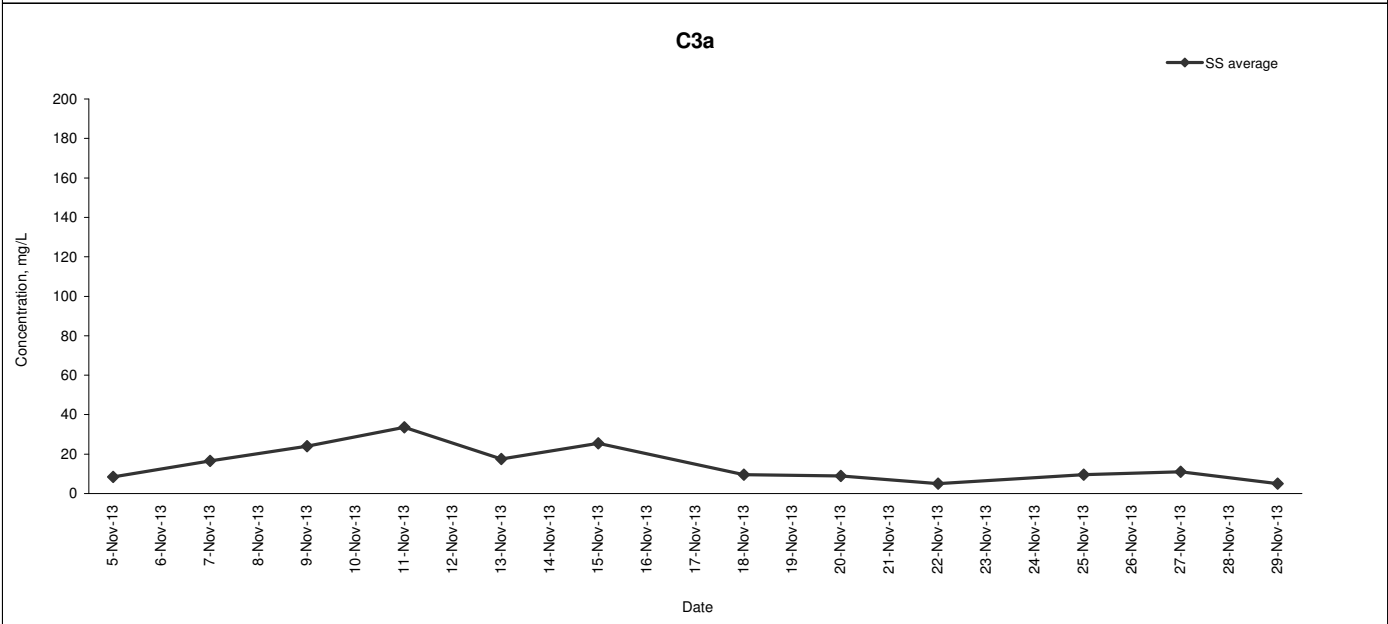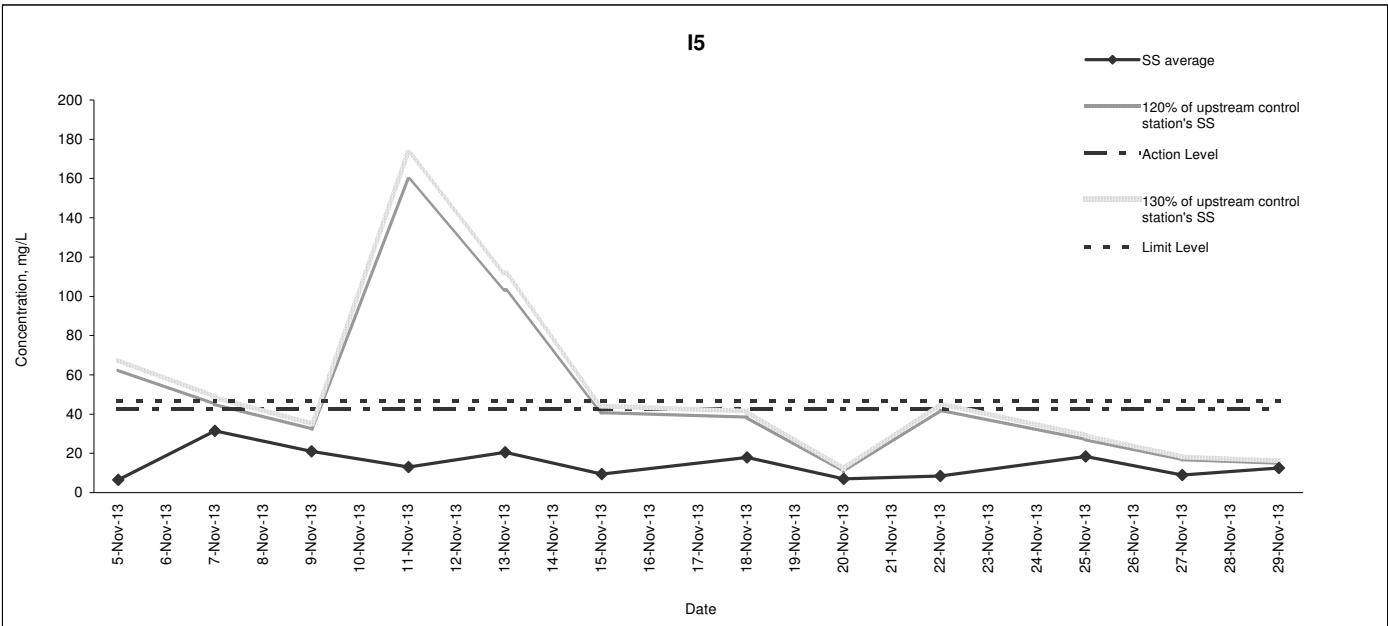

Appendix J

Waste Flow Table

Appendix J Monthly Summary Waste Flow Table

Month	Actual Quantities of Inert C&D Materials Generated Monthly (Note 1)								Actual Quantities of non-inert C&D Materials (i.e. C&D Wastes) Generated Monthly				
	Generated				Disposed				Recycled			Disposed	
	Fill Material	Artificial Material		Total Quantity Generated	Reused in the Contract	Reused in other Projects	Disposed as Public Fills at TM38	Total Quantity Disposal	Metals	Paper/ cardboard packaging (Note 3)	Plastics	Chemical Waste	General Refuse (Note 2)
	Soil and Rock	Broken Concrete	Asphalt										
Unit	('000m ³)	('000m ³)	('000m ³)	('000m ³)	('000m ³)	('000m ³)	('000m ³)	('000m ³)	('000Kg)	('000Kg)	('000Kg)	('000Kg)	('000Kg)
Jan	-	-	-	-	-	-	-	-	-	-	-	-	-
Feb	-	-	-	-	-	-	-	-	-	-	-	-	-
Mar	-	-	-	-	-	-	-	-	-	-	-	-	-
Apr	-	-	-	-	-	-	-	-	-	-	-	-	-
May	-	-	-	-	-	-	-	-	-	-	-	-	-
Jun	-	-	-	-	-	-	-	-	-	-	-	-	-
Sub-Total	0	0	0	0	0	0	0	0	0	0	0	0	0
Jul	-	-	-	-	-	-	-	-	-	-	-	-	-
Aug	-	-	-	-	-	-	-	-	-	-	-	-	-
Sep	-	-	-	-	-	-	-	-	-	-	-	-	-
Oct	-	-	-	-	-	-	-	-	-	-	-	-	-
Nov	1.351	0	0	1.351	0.473	0	0.878	1.351	0	0	0	0	32.16
Dec													
Total	1.351	0	0	1.351	0.473	0	0.878	1.351	0	0	0	0	32.16

- Note:
1. Assume the density of fill is 2 ton/m³
 2. Refuses disposed of at NENT landfill
 3. Assume the weight of recycled papers is 7 kg/bag.

Appendix K Implementation Schedule of Environmental Mitigation Measures (EMIS)

Impact	Environmental Protection Measures	Timing	Responsibility	Implementation Status #
Air Quality				
Air Quality during Construction	<ul style="list-style-type: none"> Restricting heights from which materials are dropped, as far as practicable to minimize the fugitive dust arising from unloading/loading. All stockpiles of excavated materials or spoil of more than 50m³ shall be enclosed, covered or dampened during dry or windy conditions. Effective water sprays shall be used to control potential dust emission sources such as unpaved haul roads and active construction areas. All spraying of materials and surfaces shall avoid excessive water usage. Vehicles that have the potential to create dust while transporting materials shall be covered, with the cover properly secured and extended over the edges of the side and tail boards. Materials shall be dampened, if necessary, before transportation. Travelling speeds shall be controlled to reduce traffic induced dust dispersion and re-suspension within the site from the operating haul trucks. Vehicle washing facilities shall be provided to minimise the quantity of material deposited on public roads. 	During Construction	Contractor	N/A ✓ ✓ ✓ ✓ N/A N/A ✓
Air Quality during Operation	Not required	N/A	N/A	N/A
Noise				
Noise during Construction	<ul style="list-style-type: none"> Use of silenced plant or plant equipped with mufflers or dampers in substitute of ordinary plant. Reduce the number of equipment and their percentage on-time. 	During Construction	Contractor	✓ ✓
Noise during Operation	Not required	N/A	N/A	N/A
Water Quality				
Water Quality during Construction	<u>Road Widening Works, Earthworks and Culvert Extension Works</u> <ul style="list-style-type: none"> Wastewater generated from any concrete batching washdown of equipment or similar activities should be discharged into foul sewers, after the removal of settleable solids, and pH adjustment as necessary. All sewage discharges from the study area should meet the TM standards and approval from EPD through the licensing process is required. Sand traps, oil interceptors and other pollution prevention installations should 	During Construction	Contractor	Obs ✓

Notes (#): ✓ – Compliance; Obs – Observation; N/C – Non Compliance ; N/A – Not Applicable;

Impact	Environmental Protection Measures	Timing	Responsibility	Implementation Status #
	be provided, properly cleaned and maintained. <ul style="list-style-type: none"> • Runoff from exposed working areas, unfinished slopes and from unlined temporary channels should be directed to stilling basins and/or silt traps before discharging to the drainage outfalls. • Regular inspections of stilling basins and/or silt traps is required to ensure that sediment is not conveyed into the existing drainage system. • Open stockpiles should be covered with a tarpaulin cover. • During the wet season, any exposed top soils should be covered with a tarpaulin, shotcreted or hydroseeded. • Sand and silt from wash-water from vehicle washing should be settled out before discharging into storm drains. • Fuels should be stored in bunded areas such that spillage can be easily collected. 			✓ Obs ✓ N/A Obs Obs
Water Quality during Operation	Not required	N/A	N/A	N/A
Waste Management				
Waste Management during Construction	<u>General Waste</u> <ul style="list-style-type: none"> • Transport of wastes off site as soon as possible. • Maintenance of accurate waste records. • Minimisation of waste generation for disposal (via reduction/recycling/re-use). • No on-site burning will be permitted. • Use of re-useable metal hoardings/signboards. <u>Vegetation from site clearance</u> <ul style="list-style-type: none"> • Segregation of materials to facilitate disposal. • Mulching to reduce bulk and where possible review opportunities for the possible beneficial use within landscaping areas. <u>Demolition Wastes</u> <ul style="list-style-type: none"> • Segregation of materials to facilitate disposal. 	During Construction During Construction During Construction	Contractor Contractor Contractor	✓ ✓ ✓ ✓ ✓ ✓ N/A N/A

Notes (#): ✓ – Compliance; Obs – Observation; N/C – Non Compliance ; N/A – Not Applicable;

Impact	Environmental Protection Measures	Timing	Responsibility	Implementation Status #
	<ul style="list-style-type: none"> • Appropriate stockpile management. 			<u>Demolition Wastes</u>
	<p><u>Excavated Materials</u></p> <ul style="list-style-type: none"> • Segregation of materials to facilitate disposal / reuse. • Appropriate stockpile management. • Re-use of excavated material on or off site (where possible). • Special handling and disposal procedures in the event that contaminated materials are excavated. 	During Construction	Contractor	✓
	<p><u>Construction Wastes</u></p> <ul style="list-style-type: none"> • Segregation of materials to facilitate recycling/reuse (within designated area in appropriate containers/stockpiles). • Appropriate stockpile management. • Planning to reduce over ordering and waste generation. • Recycling and re-use of materials where possible (e.g. metal, wood from formwork) • For material which cannot be re-used/recycled, collection should be carried out by an approved waste contractor for landfill disposal. 	During Construction	Contractor	✓
	<p><u>Bentonite Slurries</u></p> <ul style="list-style-type: none"> • Bentonite slurries should be reused as far as possible. • Disposal in accordance with Practice Note For Professional Persons ProPECC PN 1/94. 	During Construction	Contractor	N/A
	<p><u>Chemical Wastes</u></p> <ul style="list-style-type: none"> • Storage within locked, covered and bunded area. • The storage area shall not be located adjacent to sensitive receivers e.g. drains. • Minimise waste production and recycle oils/solvents where possible. • A spill response procedure shall be in place and absorption material available 	During Construction	Contractor	✓
				✓
				N/A
				✓
				N/A

Notes (#): ✓ – Compliance; Obs – Observation; N/C – Non Compliance ; N/A – Not Applicable;

Impact	Environmental Protection Measures	Timing	Responsibility	Implementation Status #
	for minor spillages. <ul style="list-style-type: none"> • Use appropriate and labelled containers. • Educate site workers on site cleanliness/waste management procedures. • If chemical wastes are to be generated, the contractor must register with EPD as a chemical waste producer. • The chemical wastes shall be collected by a licensed chemical waste collector. <u>Municipal Wastes</u> <ul style="list-style-type: none"> • Waste shall be stored within a temporary refuse collection facility, in appropriate containers prior to collection and disposal. • Regular, daily collections are required by an approved waste collector. 	During Construction	Contractor	✓ ✓ ✓ ✓ ✓ ✓
Waste Management during Operation	Not required.	N/A	N/A	N/A
Ecology				
Ecology during Construction	<u>Accurate Delineation of Works Area</u> <ul style="list-style-type: none"> • Boundaries of proposed works areas shall be clearly identified and separated from external areas by a physical barrier to prevent encroachment of adjacent habitats. • Individual trees which fall within the works areas but which work plans show do not require removal are to be retained and fenced off to maximise protection. 	During Construction	Contractor	✓ ✓
	<u>Dust generation</u> <p>There are a number of measures which shall be taken as specified in the Air Pollution Control (Construction Dust) Regulation on 'Dust Control Requirements, including the following key measures to be applied during construction:</p> <ul style="list-style-type: none"> • vehicle washing facilities to be provided at every discernible or designated vehicle exit point; • all temporary site access roads shall be sprayed with water to suppress dust as necessary; 	During Construction	Contractor	✓ ✓

Notes (#): ✓ – Compliance; Obs – Observation; N/C – Non Compliance ; N/A – Not Applicable;

Impact	Environmental Protection Measures	Timing	Responsibility	Implementation Status #
	<ul style="list-style-type: none"> all dusty materials should be sprayed with water immediately prior to any handling; and 			N/A
	<ul style="list-style-type: none"> all debris should be covered entirely by impervious sheeting or stored in a sheltered debris collection area. 			N/A
	<u>Surface Run-off</u> In general, mitigation measures shall be in accordance with ProPECC PN1/94 on 'Construction Site Drainage'. Key measures include:	During Construction	Contractor	✓
	<ul style="list-style-type: none"> Bund and cover stock piles to avoid run-off; 			✓
	<ul style="list-style-type: none"> Channel any run-off through a system of oil, grease and sediment / silt traps and reuse water on site where ever practical; 			✓
	<ul style="list-style-type: none"> All vehicle maintenance to be undertaken within a bunded area; and 			N/A
	<ul style="list-style-type: none"> Maximise vegetation retention on-site to maximise absorption (minimise transport). 			✓
Ecology during Operation	<ul style="list-style-type: none"> To conduct compensatory ecological planting as specified in the latest landscape plans approved by EPD (Clause 2.6 of the Environmental Permit refers). 	During Construction and operation	Contractor (during construction) / LCSD* (during operation) (Note: * The division of vegetation planting and maintenance responsibilities shall follow the guidelines stipulated in ETWB TCW No. 2/2004.)	N/A
Landscape and Visual				
Landscape and Visual during Construction	<u>Preservation of Existing Vegetation</u> <ul style="list-style-type: none"> Trees identified for retention within the project limit would be protected during the works The tree transplanting and planting works shall be implemented by approved Landscape Contractors <u>Temporary Works Areas</u> <ul style="list-style-type: none"> Where feasible the works areas would be screened using hoarding and 	During Construction	Contractor	Obs
				✓
		During Construction	Contractor	N/A

Notes (#): ✓ – Compliance; Obs – Observation; N/C – Non Compliance ; N/A – Not Applicable;

Impact	Environmental Protection Measures	Timing	Responsibility	Implementation Status #
	<p>existing vegetation would be retained where possible to reduce the landscape and visual impacts arising from the construction activity. The landscape of these works areas would be restored following the completion of the construction phase.</p> <p><u>Hoarding</u></p> <ul style="list-style-type: none"> • A hoarding would be erected where practicable in the most visually sensitive locations to screen the temporary construction works from the local VSRs. <p><u>Top Soils</u></p> <ul style="list-style-type: none"> • The works will result in disturbance to extensive areas of topsoil. Topsoil worthy of retention should be stockpiled for use following completion of the civil engineering works. It should either be temporarily vegetated with hydroseeded grass or turned over on a regular basis. <p><u>Protection of Important Landscape Features</u></p> <ul style="list-style-type: none"> • Important features such as temples, Island House and kilns within the study area, although remote from the proposed works retained and adequately protected. 	During Construction	Contractor	N/A
		During Construction	Contractor	N/A
		During Construction	Contractor	N/A
Landscape and Visual during Operation	Not required.	N/A	N/A	N/A

Appendix L

Investigation Report for Exceedances

Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2

Investigation Report of Environmental Quality Exceedance(s)

Ref. No.: W131109_DO

Date	9 November 2013
Time	10:33
Monitoring Location	I5
Parameter	Dissolved Oxygen (DO)
Action / Limit Levels	Action Level: 6.7 mg/L Limit Level: 4 mg/L or 40% saturation at 15 degree Celsius
Measured Level	6.1 mg/L (Action level being exceeded ⁽¹⁾)
Possible reason for the exceedance ⁽¹⁾	<p>According to the monitoring results on 9 November 2013, it is noted that the average DO level of C3a and C3b was 5.9mg/L, which was lower than the DO level of I5 (i.e. 6.1mg/L). Therefore, the non-compliance is likely due to the source from the upstream of the river on that day, and it is considered not project related.</p> <p>From the monitoring results on 11 November 2013, the DO level of I5 was 7.0 mg/L, which was higher than the action level. No non-compliance was recorded.</p> <p>To conclude, the non-compliance was related to sources from upstream of the river on that day, and non-project related.</p>
Action taken / to be taken	As the non-compliance was non-projected, no further investigation and necessary remedial measure(s) would be required.
Remarks	-

Note:

- (1) For DO, non-compliance of the water quality limits occurs when monitoring result is lower than the limits.

Project Name:

**Contract No. CV/2012/09 Liantang / Heung Yuen Wai Boundary Control Point Site Formation and Infrastructure works - Contract 3
Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling - Stage 2**

Date of Monitoring: 11/11/2013

Weather: Cloudy

Monitoring Location	Time	Water Depth (m)	Temperature (°C)		pH		DO (mg/L)		DO (% saturation)		Turbidity (NTU)		Salinity (g/L)		SS (mg/L)	
			Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
C3a	11:46	<0.5	24.5	24.5	7.7	7.7	6.23	6.2	74.7	74.6	28.2	26.2	<0.1	<0.1	34	33.5
			24.5		7.7		6.23		74.4		24.2		<0.1		33	
C3b	11:34	<0.5	24.1	24.1	8.0	8.0	6.84	6.8	81.3	81.4	87.3	88.5	<0.1	<0.1	130	133
			24.1		8.0		6.84		81.4		89.6		<0.1		136	
I5	11:17	<0.5	24.4	24.4	7.8	7.8	7.02	7.0	84.0	84.0	17.0	17.0	<0.1	<0.1	12	13
			24.4		7.8		7.01		83.9		16.9		<0.1		14	

Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2

Investigation Report of Environmental Quality Exceedance(s)

Ref. No.: W131118_DO

Date	18 November 2013
Time	18:19
Monitoring Location	I5
Parameter	Dissolved Oxygen (DO)
Action / Limit Levels	Action Level: 6.7 mg/L Limit Level: 4 mg/L or 40% saturation at 15 degree Celsius
Measured Level	4.4 mg/L (Action level being exceeded ⁽¹⁾)
Possible reason for the exceedance ⁽¹⁾	<p>According to the monitoring results on 18 November 2013, it is noted that the DO level of C3a was 4.2 mg/L, which was much lower than the DO level of I5. Therefore, the non-compliance is likely due to the source from the upstream of the river on that day, and it is considered not project related.</p> <p>From the monitoring results on 20 November 2013, the DO level of I5 was 8.5 mg/L, which was higher than the action level. No non-compliance was recorded.</p> <p>To conclude, the non-compliance was related to sources from upstream of the river on that day, and it is non-project related.</p>
Action taken / to be taken	As the non-compliance was non-projected, no further investigation and necessary remedial measure(s) would be required.
Remarks	-

Note:

- (1) For DO, non-compliance of the water quality limits occurs when monitoring result is lower than the limits.

Project Name:

**Contract No. CV/2012/09 Liantang / Heung Yuen Wai Boundary Control Point Site Formation and Infrastructure works - Contract 3
Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling - Stage 2**

Date of Monitoring: 11/20/2013

Weather: Fine

Monitoring Location	Time	Water Depth (m)	Temperature (°C)		pH		DO (mg/L)		DO (% saturation)		Turbidity (NTU)		Salinity (g/L)		SS (mg/L)	
			Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
C3a	16:09	<0.5	22.1	22.1	7.7	7.7	5.7	5.7	65.3	65.2	14.8	14.0	<0.1	<0.1	10	9
			22.1		7.7		5.7		65.0		13.2		<0.1		8	
C3b	15:45	<0.5	21.4	21.4	8.0	8.0	6.5	6.5	73.7	73.4	18.7	18.7	<0.1	<0.1	8	9
			21.4		8.0		6.5		73.0		18.6		<0.1		10	
I5	15:15	<0.5	22.2	22.3	7.9	7.9	8.5	8.5	97.7	97.9	13.5	13.5	<0.1	<0.1	6	7
			22.3		7.9		8.5		98.0		13.4		<0.1		8	

Appendix M Statistics on Complaints, Notifications of Summons and Successful Prosecutions

Cumulative Complaint Log

Complaint Log No.	Date of Complaint	Received From and Received By	Location of Complainant	Nature of Complaint	Outcome	Status
C131126	November 26, 2013	Mr. Tony Hung from WWF	Mat Wat River (works sites for box culvert extension)	Suspected unauthorised discharge of water from a construction site to Ma Wat River, Tai Wo Service Road East, Tai Po	<ol style="list-style-type: none"> 1) It was found that the water leaving the end of the steel pipes was the diverted water from the upstream of the existing box culverts, instead of being discharged from the construction works sites. 2) An EM&A Programme is being undertaken to monitoring the environmental performance of the construction works, and the Contractor has also implemented appropriate mitigation measures to avoid silt-laden runoff discharging from the works sites into the river. 3) The complaint is considered an invalid complaint under this Project. 	In progress

Cumulative Log for Notifications of Summons

Log No.	Date/Location	Subject	Status	Total Received in this reporting month	Total no. Received since project commencement

Cumulative log for Successful Prosecutions

Log No.	Date/Location	Subject	Status	Total Received in this reporting month	Total no. Received since project commencement



**Meinhardt Infrastructure and
Environment Ltd**
邁進基建環保工程顧問有限公司

4/F Wah Ming Centre
421 Queen's Road West
Hong Kong
香港皇后大道西421號華明中心4樓

Tel 電話: +852 2858 0738
Fax 傳真: +852 2540 1580

mail@meinhardt.com.hk
www.meinhardtgroup.com